



**40GHz - 60GHz**

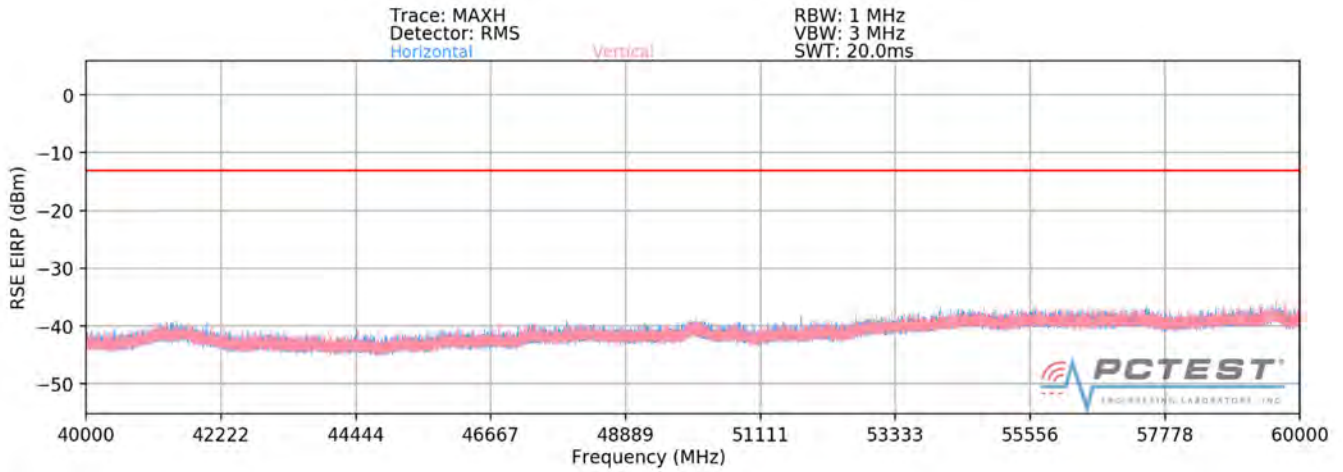

**Plot 7-133. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

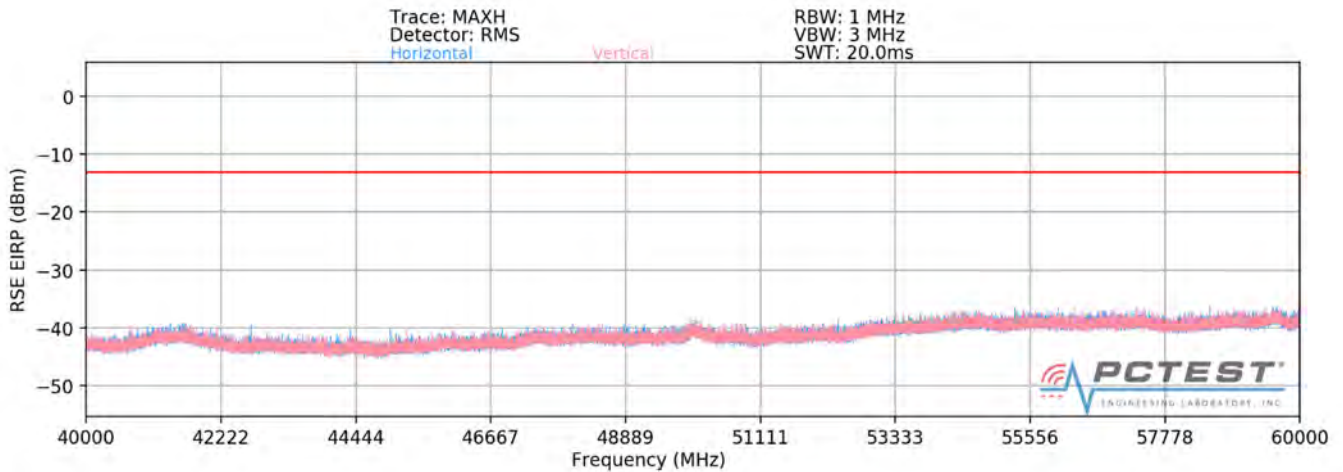

**Plot 7-134. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 131 of 286

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55070.88	Low	50	H	QPSK	H	73	221	-52.65	-13.00	-39.65
55071.06	Low	50	V	QPSK	V	39	341	-48.79	-13.00	-35.79
55845.27	Mid	50	H	QPSK	H	73	220	-49.95	-13.00	-36.95
55845.03	Mid	50	V	QPSK	V	99	213	-46.89	-13.00	-33.89
56639.85	High	50	H	QPSK	H	69	217	-48.70	-13.00	-35.70
56639.67	High	50	V	QPSK	V	43	331	-52.19	-13.00	-39.19

**Table 7-81. Ant3 - SISO -Spurious Emissions Table (40GHz - 60GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-47.29	-13.00	-34.29
Mid	50	QPSK	-45.15	-13.00	-32.15
High	50	QPSK	-47.09	-13.00	-34.09

**Table 7-82. Ant3 - MIMO -Spurious Emissions Table (40GHz - 60GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 132 of 286	

**60GHz - 90GHz**

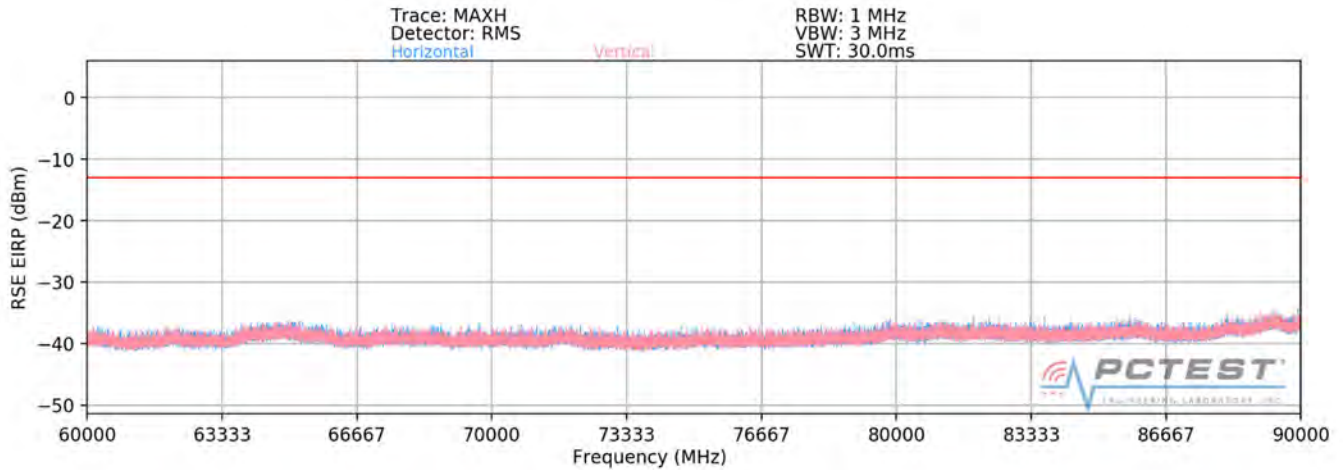

**Plot 7-135. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

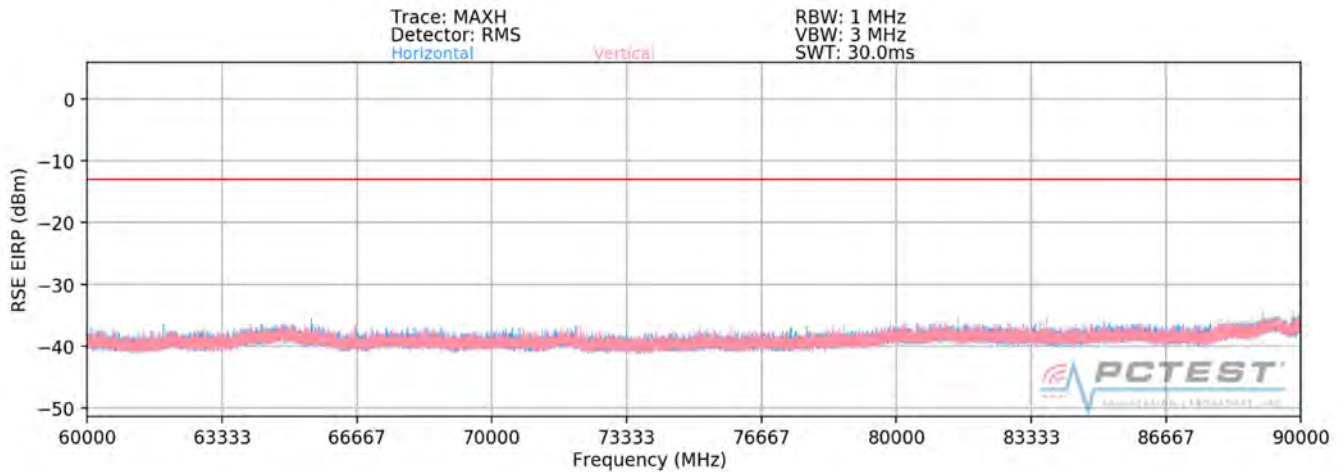

**Plot 7-136. Ant3-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 133 of 286

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82602.15	Low	50	H	QPSK	H	211	55	-54.12	-13.00	-41.12
82604.45	Low	50	V	QPSK	V	313	125	-53.98	-13.00	-40.98
83767.48	Mid	50	H	QPSK	H	187	47	-54.13	-13.00	-41.13
83767.44	Mid	50	V	QPSK	V	257	148	-54.04	-13.00	-41.04
84961.57	High	50	H	QPSK	H	216	65	-53.61	-13.00	-40.61
84962.75	High	50	V	QPSK	V	46	184	-53.74	-13.00	-40.74

**Table 7-83. Ant3 - SISO -Spurious Emissions Table (60GHz - 90GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-51.03	-13.00	-38.03
Mid	50	QPSK	-51.08	-13.00	-38.08
High	50	QPSK	-50.66	-13.00	-37.66

**Table 7-84. Ant3 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 134 of 286	

**90GHz - 100GHz**

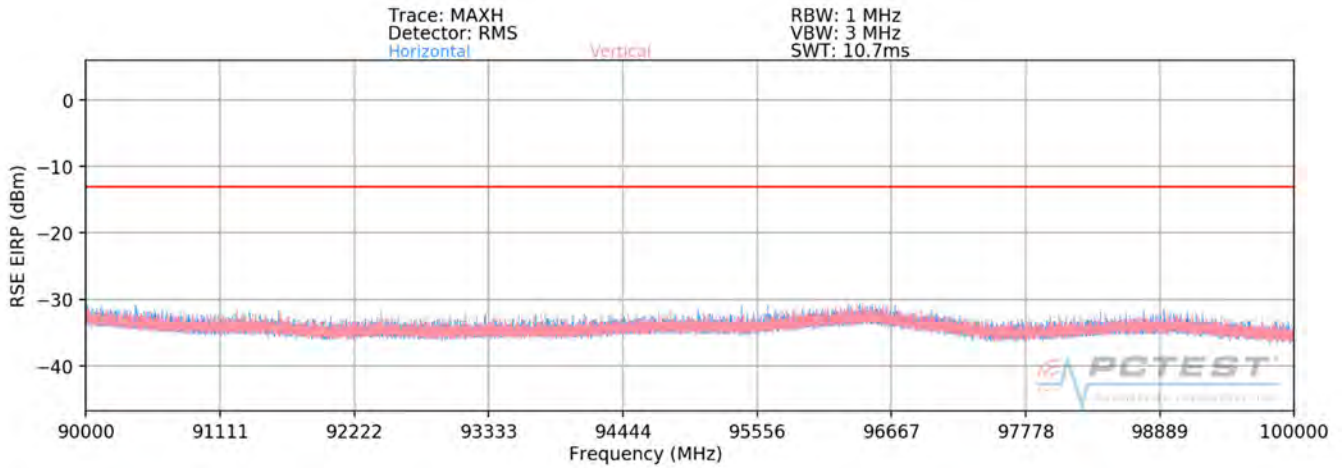

**Plot 7-137. Ant1-n263 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

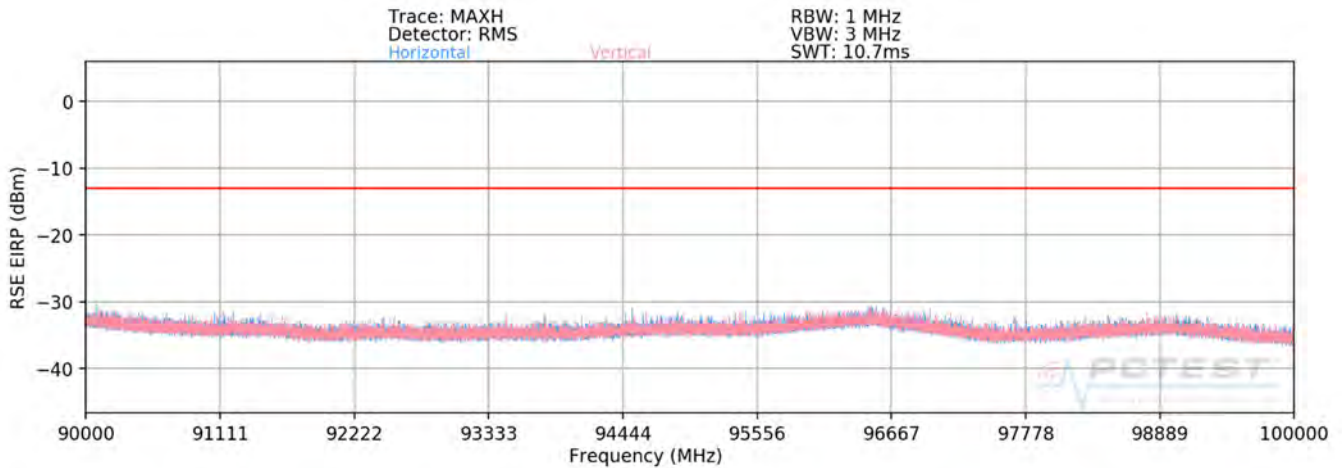

**Plot 7-138. Ant1-n263 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 135 of 286

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
96468.52	Low	50	H	QPSK	V	-	-	-40.60	-13.00	-27.60
96464.80	Low	50	V	QPSK	V	-	-	-40.38	-13.00	-27.38
96474.28	Mid	50	H	QPSK	V	-	-	-40.15	-13.00	-27.15
96472.33	Mid	50	V	QPSK	V	-	-	-40.48	-13.00	-27.48
96471.63	High	50	H	QPSK	V	-	-	-40.47	-13.00	-27.47
96486.52	High	50	V	QPSK	V	-	-	-40.52	-13.00	-27.52

**Table 7-85. Ant3 - SISO -Spurious Emissions Table (90GHz - 100GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-37.48	-13.00	-24.48
Mid	50	QPSK	-37.30	-13.00	-24.30
High	50	QPSK	-37.49	-13.00	-24.49

**Table 7-86. Ant3 - MIMO -Spurious Emissions Table (90GHz - 100GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 136 of 286	

**Band n261 – Ant4  
30MHz - 1GHz**

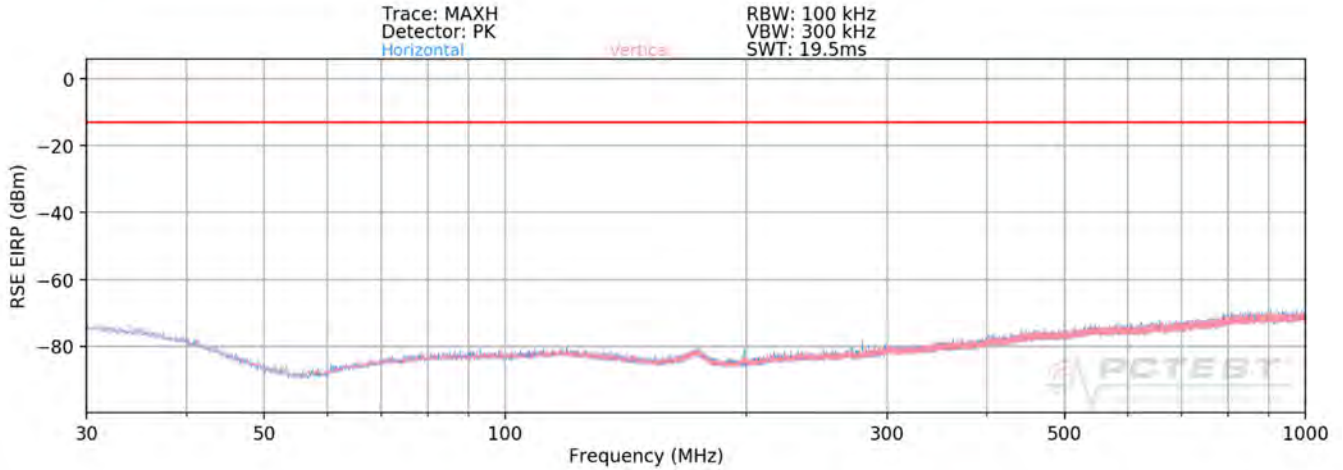


**Plot 7-139. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam)**

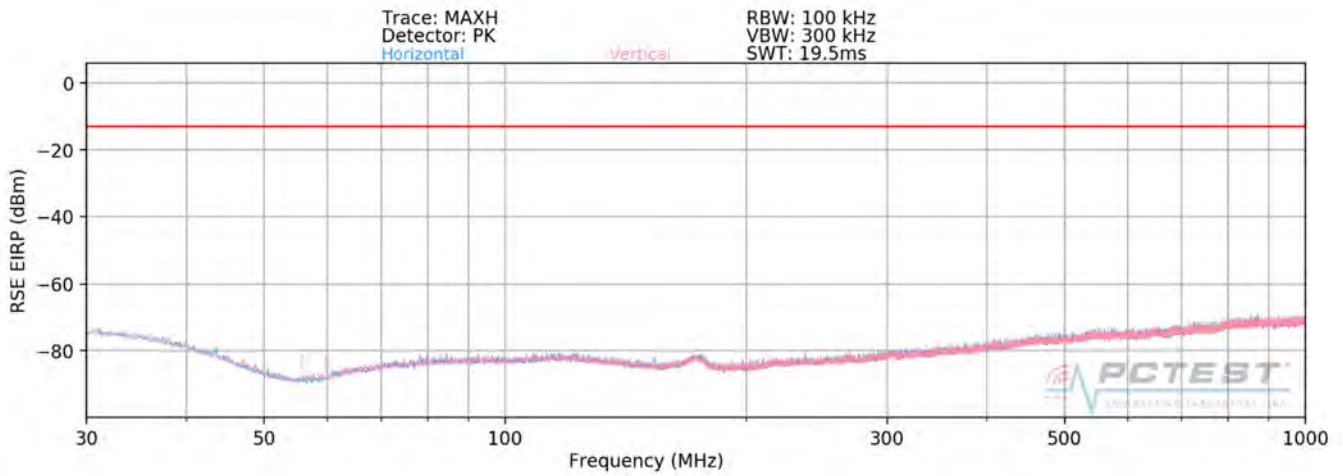


**Plot 7-140. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 137 of 286

# 1GHz - 18GHz

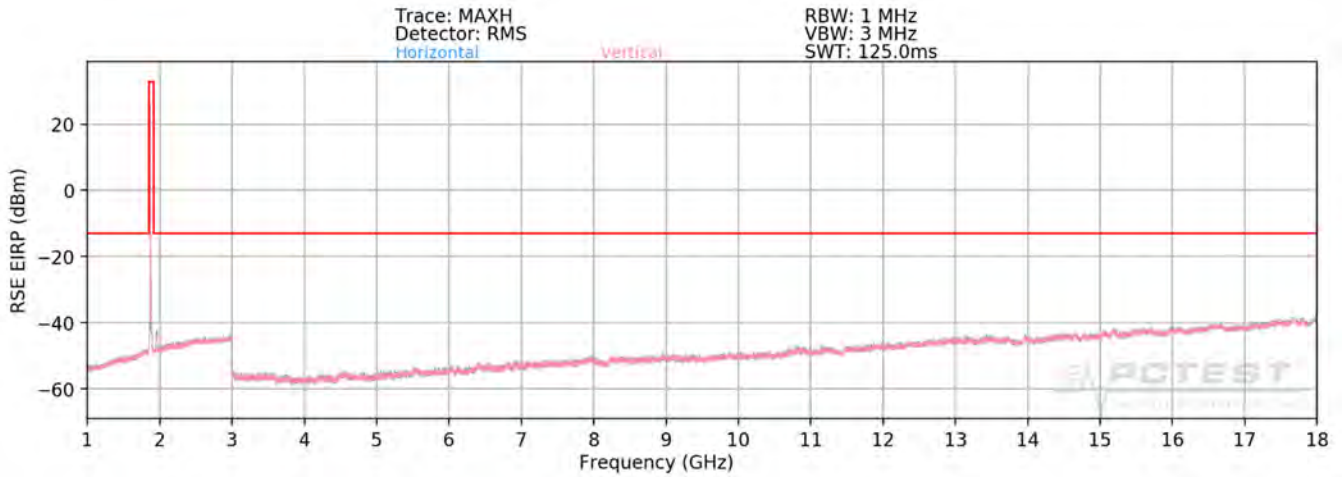

**Plot 7-141. Ant4-n261 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel H Beam – ENDC Anchor Band 2)**

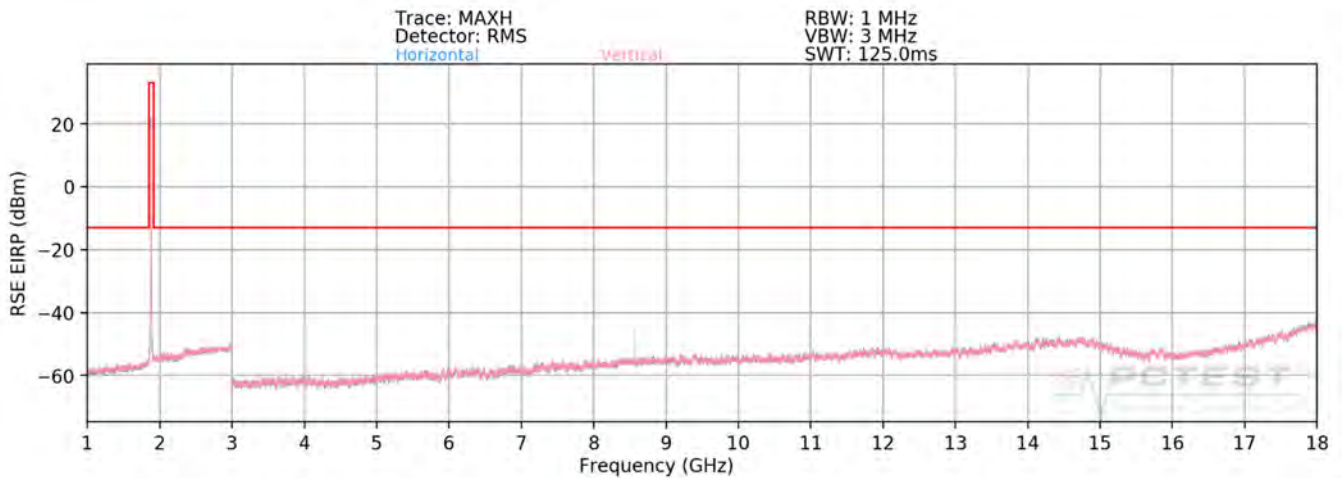

**Plot 7-142. Ant4-n261 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam - – ENDC Anchor Band 2)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 138 of 286	



## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8821.85	Low	50	H	QPSK	H	195	72	-49.39	-13.00	-36.39
8821.85	Low	50	V	QPSK	H	259	3	-38.55	-13.00	-25.55
8569.16	Mid	50	H	QPSK	H	250	348	-50.08	-13.00	-37.08
8569.16	Mid	50	V	QPSK	H	250	1	-43.00	-13.00	-30.00
8966.56	High	50	H	QPSK	H	199	72	-50.46	-13.00	-37.46
8966.56	High	50	V	QPSK	H	231	1	-40.75	-13.00	-27.75

**Table 7-87. Ant4 - SISO -Spurious Emissions Table (1GHz - 18GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-38.21	-13.00	-25.21
Mid	50	QPSK	-42.22	-13.00	-29.22
High	50	QPSK	-40.31	-13.00	-27.31

**Table 7-88. Ant4 - MIMO -Spurious Emissions Table (1GHz - 18GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 139 of 286	

### 18GHz - 27.375GHz

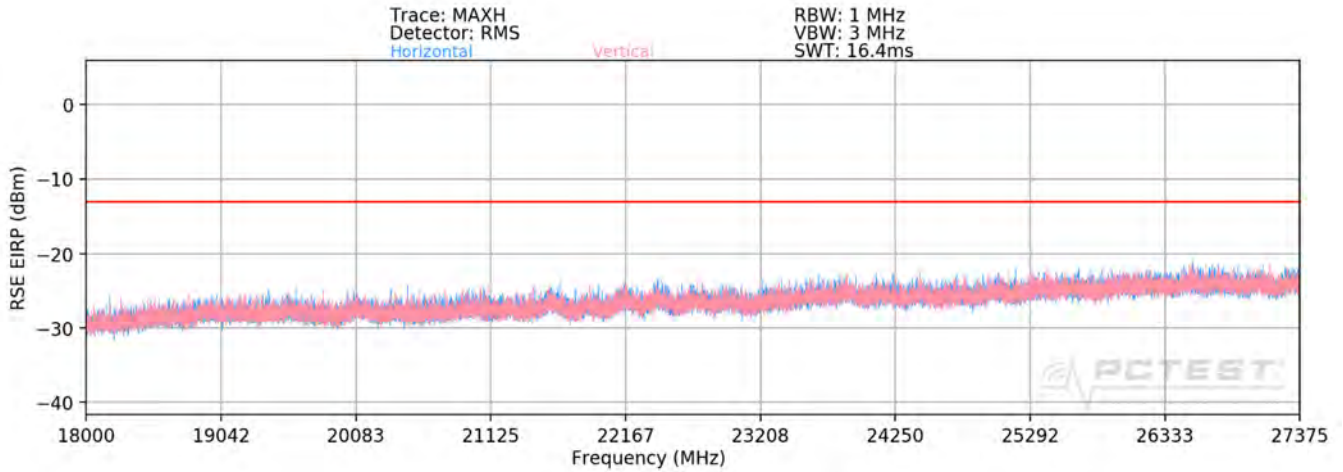

**Plot 7-143. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

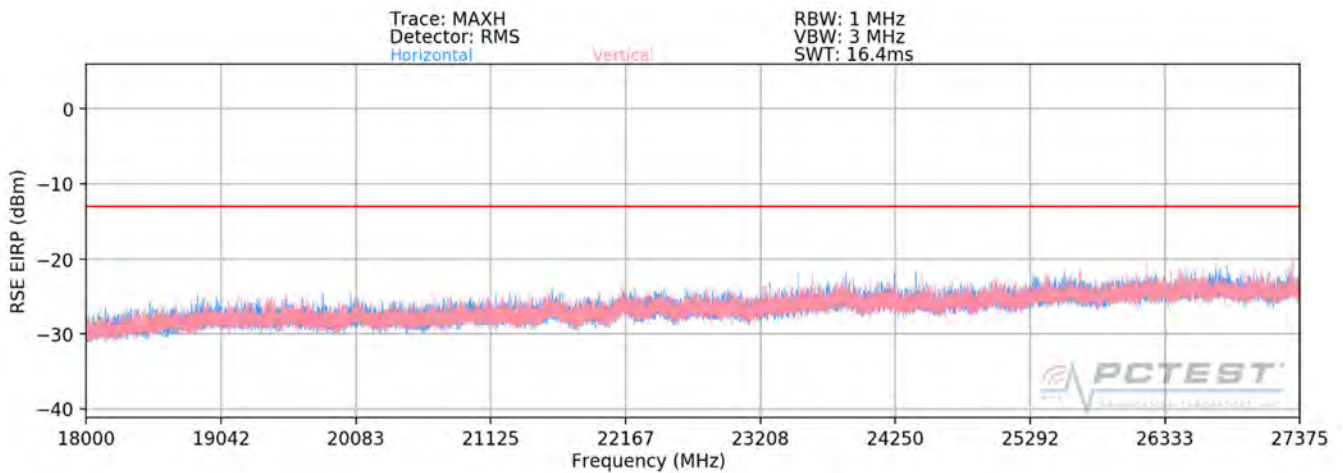

**Plot 7-144. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 140 of 286	

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
27228.21	Low	50	H	QPSK	V	278	327	-26.28	-13.00	-13.28
27381.93	Low	50	V	QPSK	V	184	217	-31.23	-13.00	-18.23
27385.32	Mid	50	H	QPSK	V	273	320	-34.63	-13.00	-21.63
27385.23	Mid	50	V	QPSK	V	183	209	-33.39	-13.00	-20.39
27140.65	High	50	H	QPSK	V	278	320	-35.22	-13.00	-22.22
26173.74	High	50	V	QPSK	V	-	-	-35.76	-13.00	-22.76

**Table 7-89. Ant4 - SISO -Spurious Emissions Table (18GHz - 27.375GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-25.07	-13.00	-12.07
Mid	50	QPSK	-30.96	-13.00	-17.96
High	50	QPSK	-32.47	-13.00	-19.47

**Table 7-90. Ant4 - MIMO -Spurious Emissions Table (18GHz - 27.375GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 141 of 286	

**28.475GHz - 40GHz**

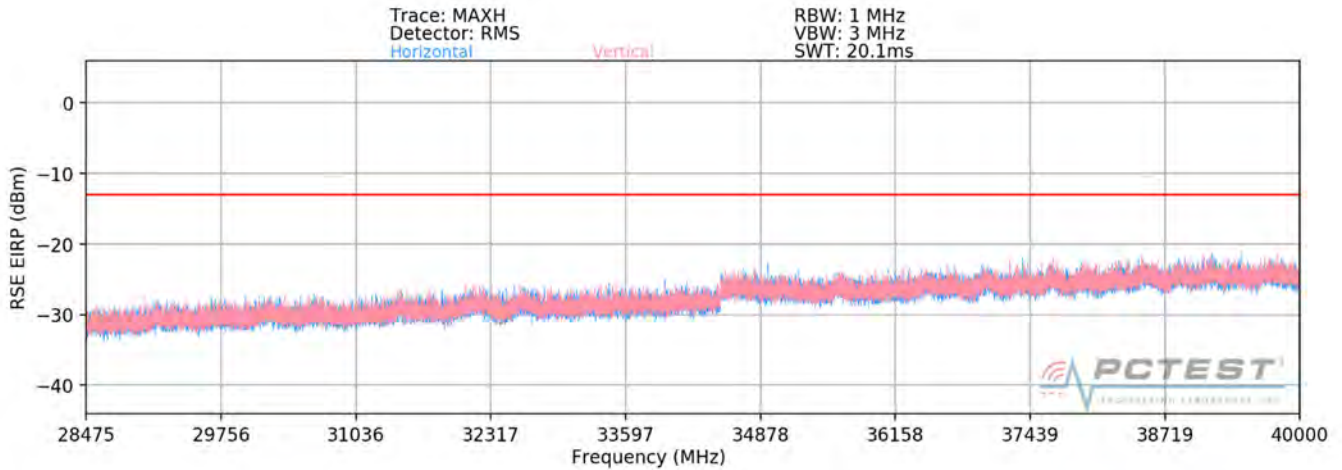

**Plot 7-145. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

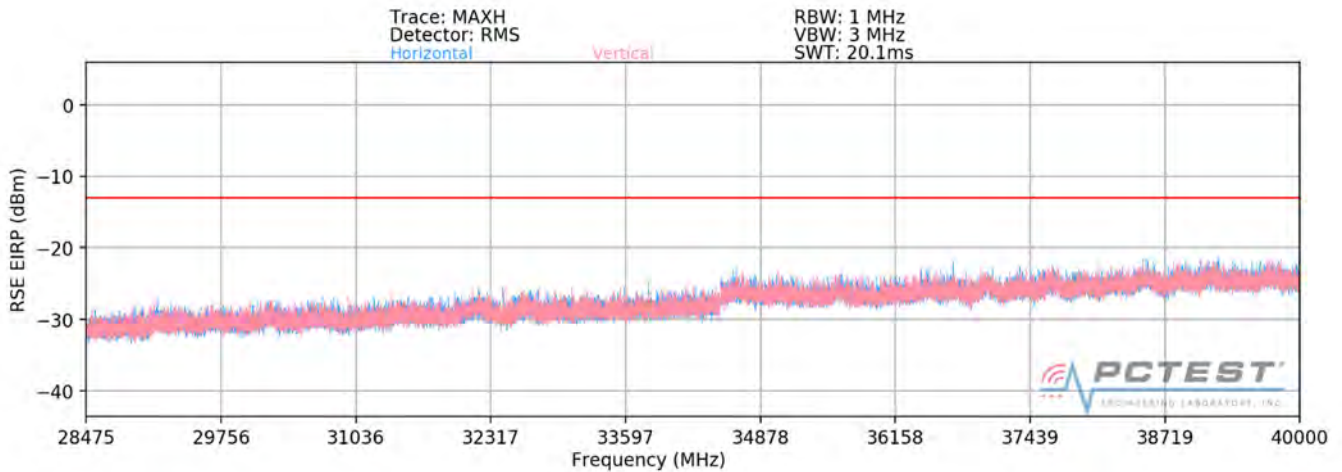

**Plot 7-146. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 142 of 286

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
28605.45	Low	50	H	QPSK	V	286	330	-25.05	-13.00	-12.05
28605.45	Low	50	V	QPSK	V	189	218	-24.69	-13.00	-11.69
30138.10	Mid	50	H	QPSK	V	274	317	-30.14	-13.00	-17.14
30138.10	Mid	50	V	QPSK	V	199	226	-30.23	-13.00	-17.23
28626.08	High	50	H	QPSK	V	372	319	-28.00	-13.00	-15.00
29740.38	High	50	V	QPSK	V	199	219	-28.89	-13.00	-15.89

**Table 7-91. Ant4 - SISO -Spurious Emissions Table (28.475GHz - 40GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-21.85	-13.00	-8.85
Mid	50	QPSK	-27.18	-13.00	-14.18
High	50	QPSK	-25.41	-13.00	-12.41

**Table 7-92. Ant4 - MIMO -Spurious Emissions Table (28.475GHz - 40GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 143 of 286	

**40GHz - 60GHz**

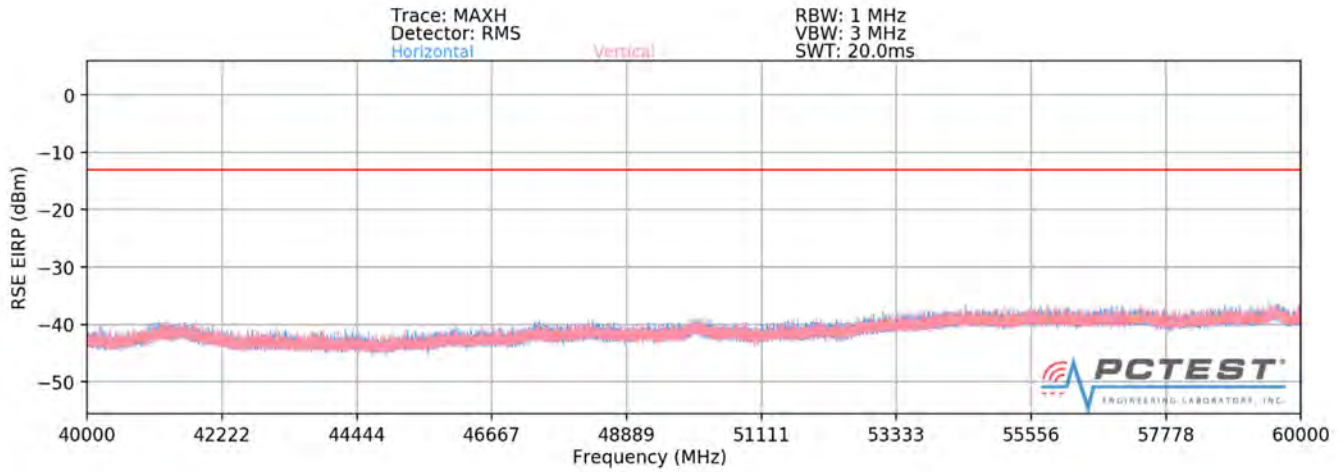

**Plot 7-147. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

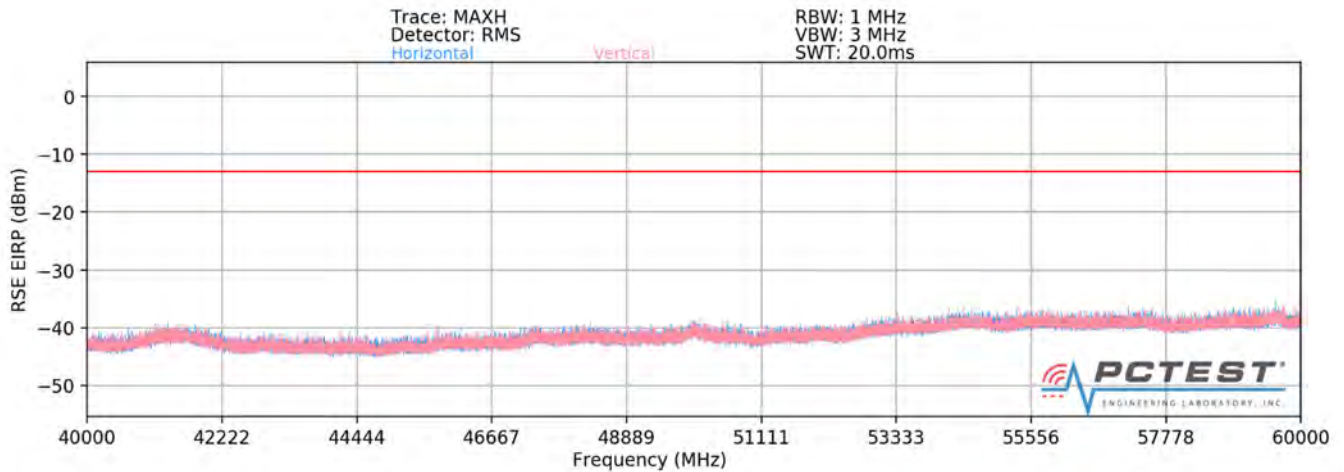

**Plot 7-148. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 144 of 286

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
55071.00	Low	50	H	QPSK	V	333	16	-52.96	-13.00	-39.96
55070.67	Low	50	V	QPSK	V	338	11	-52.85	-13.00	-39.85
55845.36	Mid	50	H	QPSK	V	324	39	-52.36	-13.00	-39.36
55845.27	Mid	50	V	QPSK	V	339	24	-53.38	-13.00	-40.38
56640.06	High	50	H	QPSK	V	327	28	-50.37	-13.00	-37.37
56640.12	High	50	V	QPSK	V	220	36	-48.89	-13.00	-35.89

**Table 7-93. Ant4 - SISO -Spurious Emissions Table (40GHz - 60GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-49.89	-13.00	-36.89
Mid	50	QPSK	-49.83	-13.00	-36.83
High	50	QPSK	-46.56	-13.00	-33.56

**Table 7-94. Ant4 - MIMO -Spurious Emissions Table (40GHz - 60GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 145 of 286	

**60GHz - 90GHz**

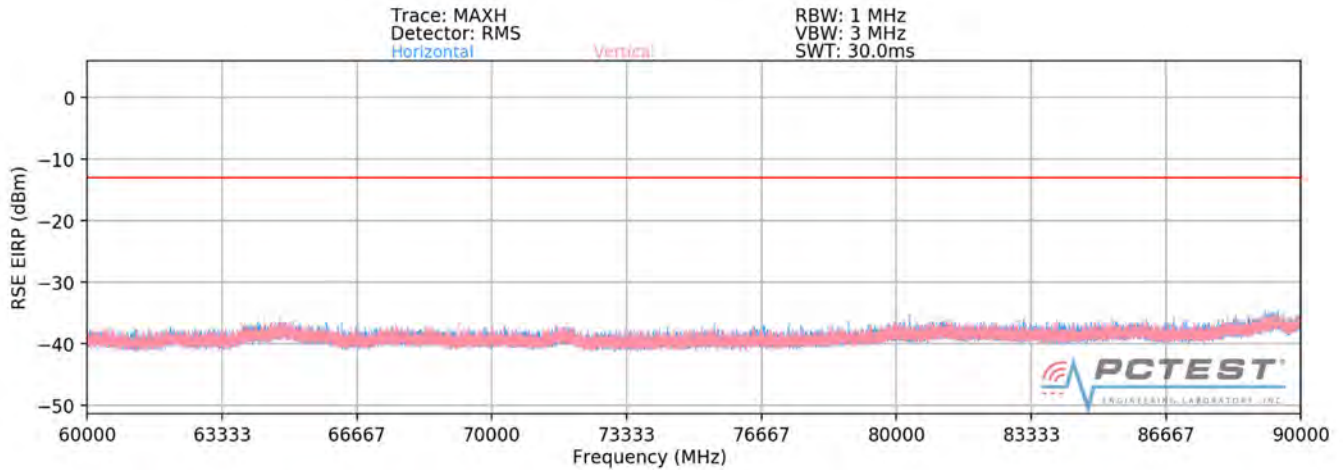

**Plot 7-149. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

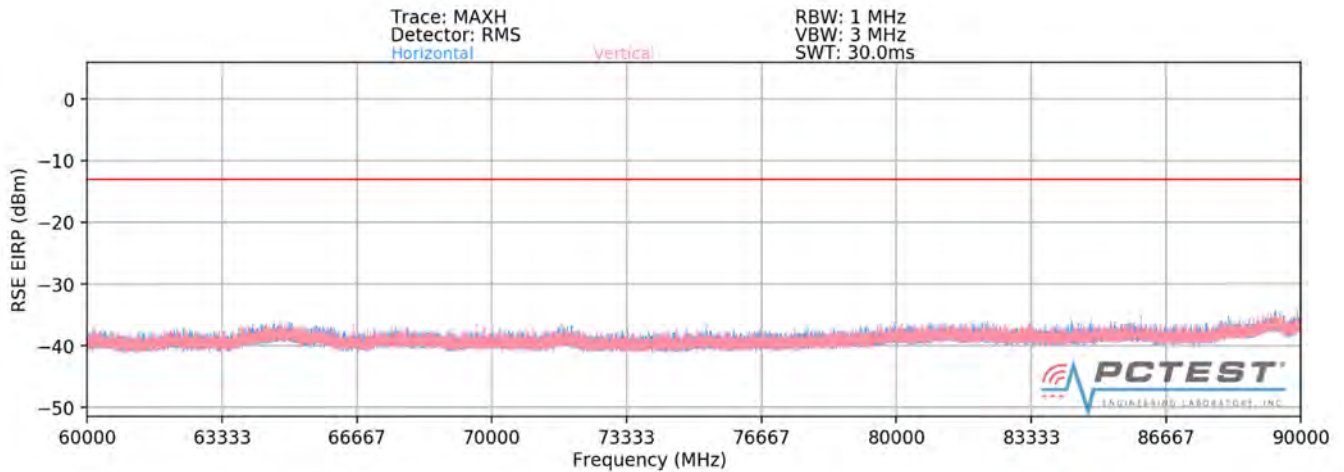

**Plot 7-150. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 146 of 286



## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
82604.15	Low	50	H	QPSK	V	47	338	-54.01	-13.00	-41.01
82605.78	Low	50	V	QPSK	V	283	110	-53.86	-13.00	-40.86
83765.74	Mid	50	H	QPSK	V	302	273	-54.21	-13.00	-41.21
83766.27	Mid	50	V	QPSK	V	308	354	-54.14	-13.00	-41.14
84960.51	High	50	H	QPSK	V	22	313	-53.73	-13.00	-40.73
84961.15	High	50	V	QPSK	V	69	120	-53.76	-13.00	-40.76

**Table 7-95. Ant4 - SISO -Spurious Emissions Table (60GHz - 90GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-50.92	-13.00	-37.92
Mid	50	QPSK	-51.16	-13.00	-38.16
High	50	QPSK	-50.74	-13.00	-37.74

**Table 7-96. Ant4 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 147 of 286	

**90GHz - 100GHz**

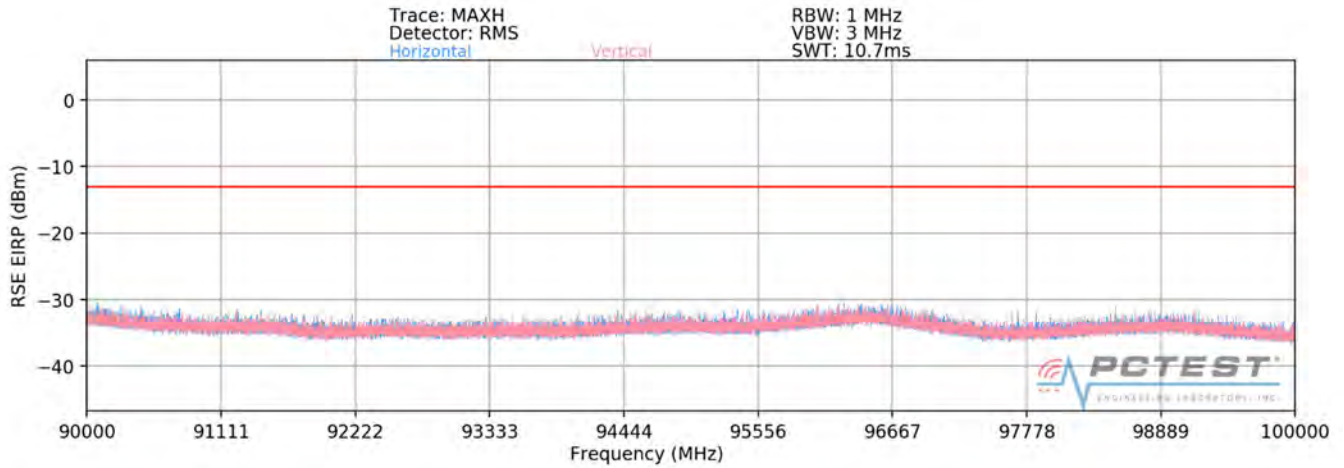

**Plot 7-151. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC Anchor B2)**

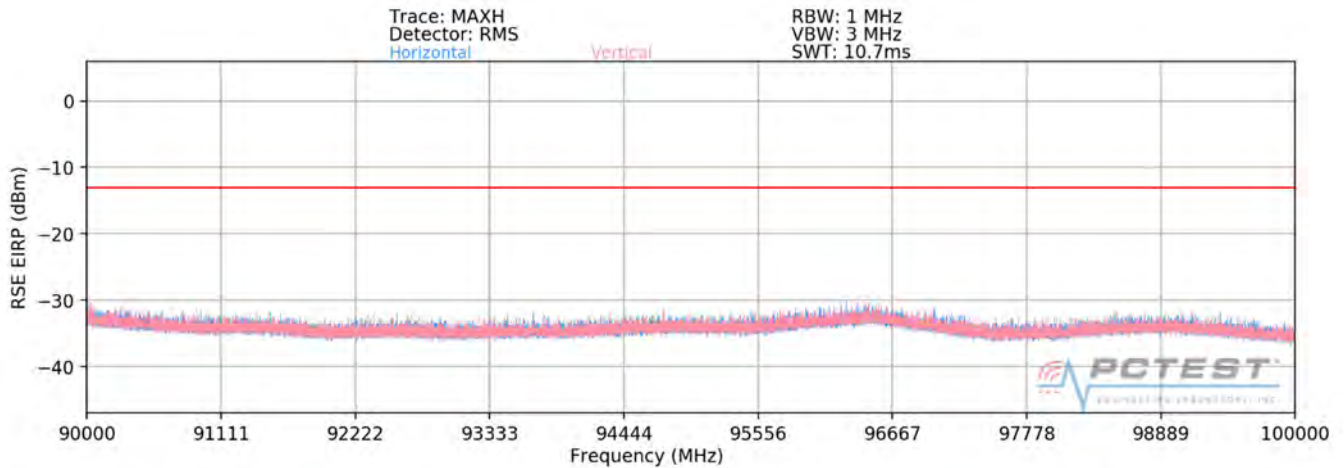

**Plot 7-152. Ant4-n261 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC Anchor B2)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 148 of 286

## Spurious Emissions EIRP Sample Calculation (n261)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
96447.44	Low	50	H	QPSK	V	-	-	-40.04	-13.00	-27.04
96453.62	Low	50	V	QPSK	V	-	-	-40.84	-13.00	-27.84
96434.30	Mid	50	H	QPSK	V	-	-	-40.06	-13.00	-27.06
96450.05	Mid	50	V	QPSK	V	-	-	-40.14	-13.00	-27.14
96444.66	High	50	H	QPSK	V	-	-	-40.51	-13.00	-27.51
96456.48	High	50	V	QPSK	V	-	-	-40.49	-13.00	-27.49

**Table 7-97. Ant4 - SISO -Spurious Emissions Table (90GHz - 100GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-37.41	-13.00	-24.41
Mid	50	QPSK	-37.09	-13.00	-24.09
High	50	QPSK	-37.49	-13.00	-24.49

**Table 7-98. Ant4 - MIMO -Spurious Emissions Table (90GHz - 100GHz)**

### Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 149 of 286	

**Band n260- Ant1**

**30MHz - 1GHz**

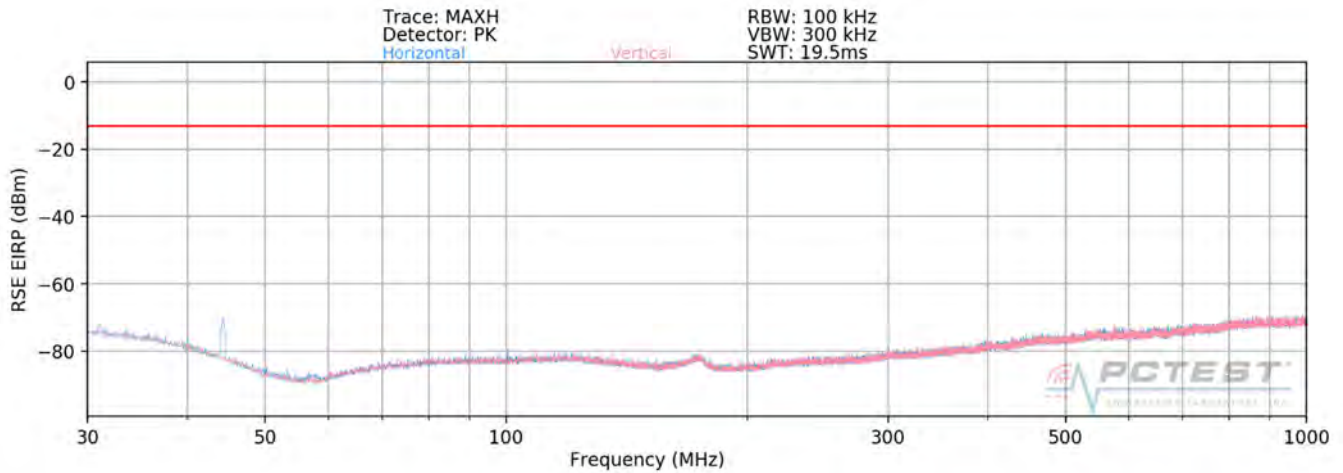


**Plot 7-153. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam)**

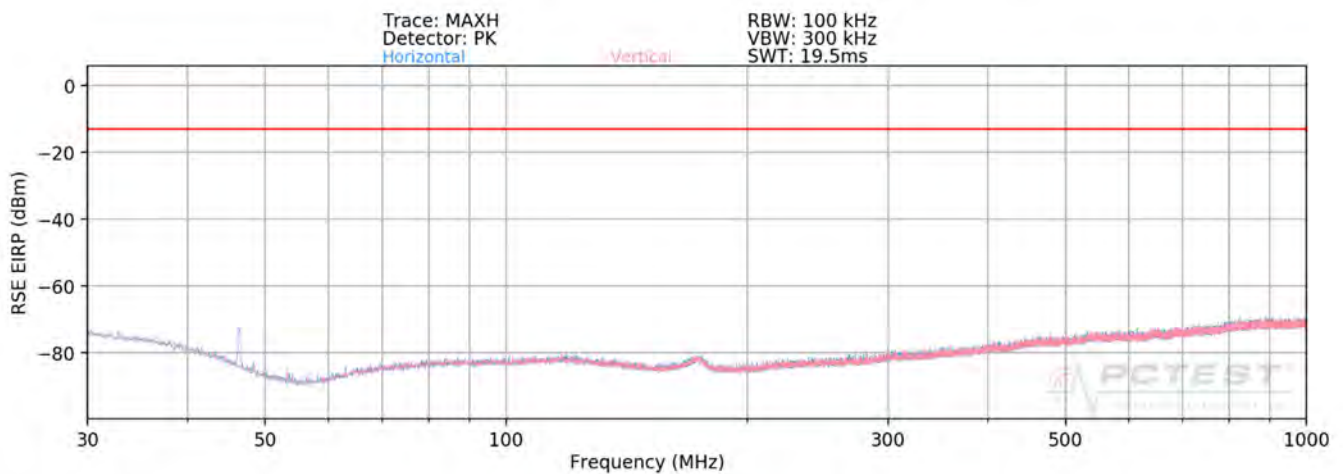


**Plot 7-154. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 150 of 286

**1GHz - 18GHz**

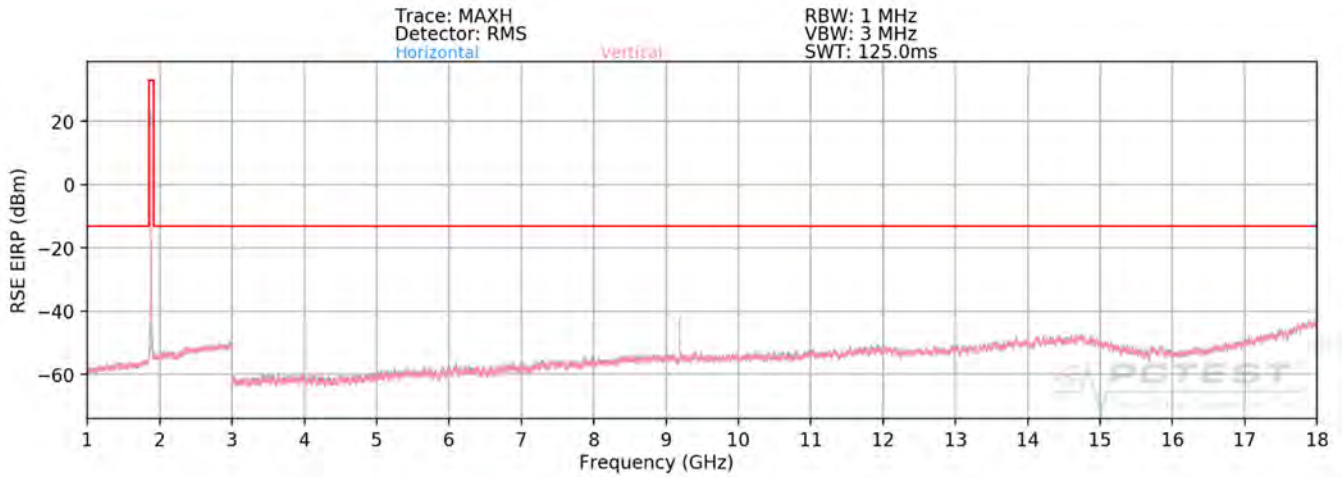

**Plot 7-155. Ant1-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel H Beam – ENDC)**

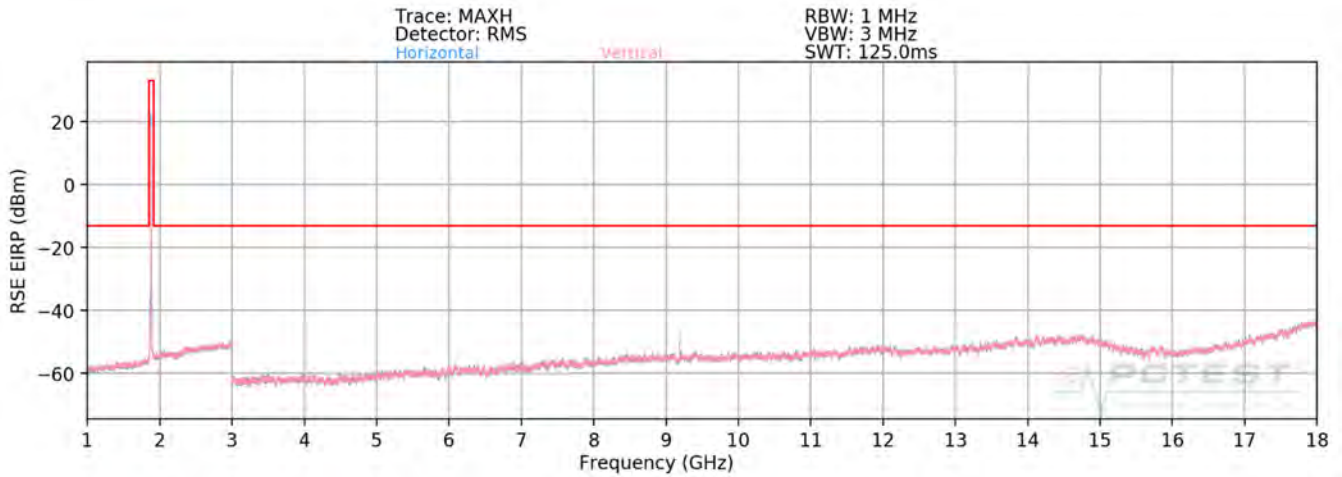

**Plot 7-156. Ant1-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 151 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8407.15	Low	50	H	QPSK	V	238	336	-45.62	-13.00	-32.62
8407.15	Low	50	V	QPSK	H	278	10	-48.17	-13.00	-35.17
9109.17	Mid	50	H	QPSK	V	141	341	-42.00	-13.00	-29.00
9109.17	Mid	50	V	QPSK	H	147	311	-46.35	-13.00	-33.35
9144.46	High	50	H	QPSK	V	257	350	-42.34	-13.00	-29.34
9144.46	High	50	V	QPSK	H	216	307	-46.53	-13.00	-33.53

**Table 7-99. Ant1 - SISO -Spurious Emissions Table (1GHz - 18GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-43.70	-13.00	-30.70
Mid	50	QPSK	-40.64	-13.00	-27.64
High	50	QPSK	-40.94	-13.00	-27.94

**Table 7-100. Ant1 - MIMO -Spurious Emissions Table (1GHz - 18GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 152 of 286	

**18GHz – 36.85GHz**

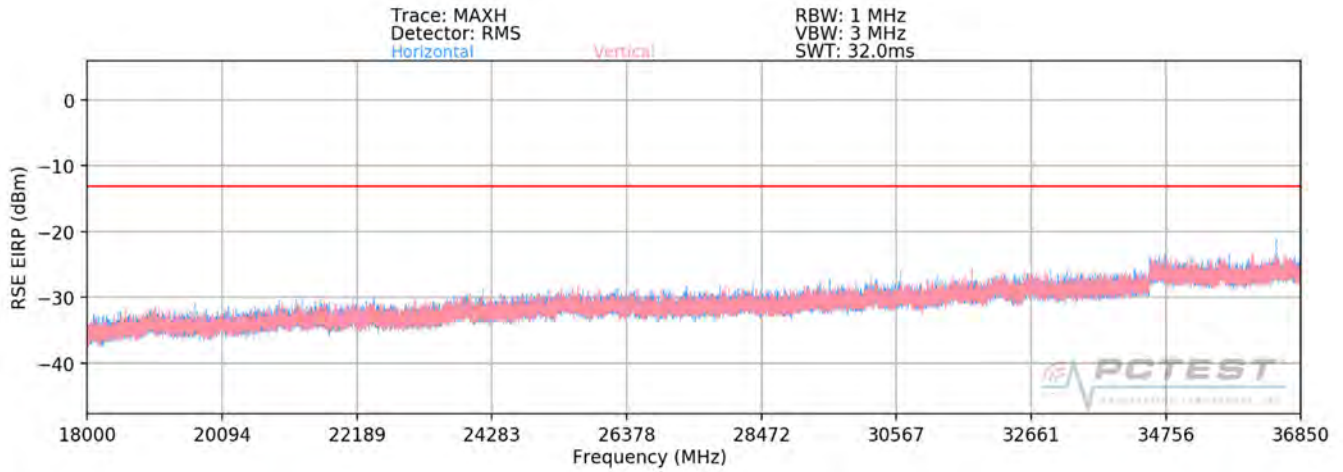

**Plot 7-157. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

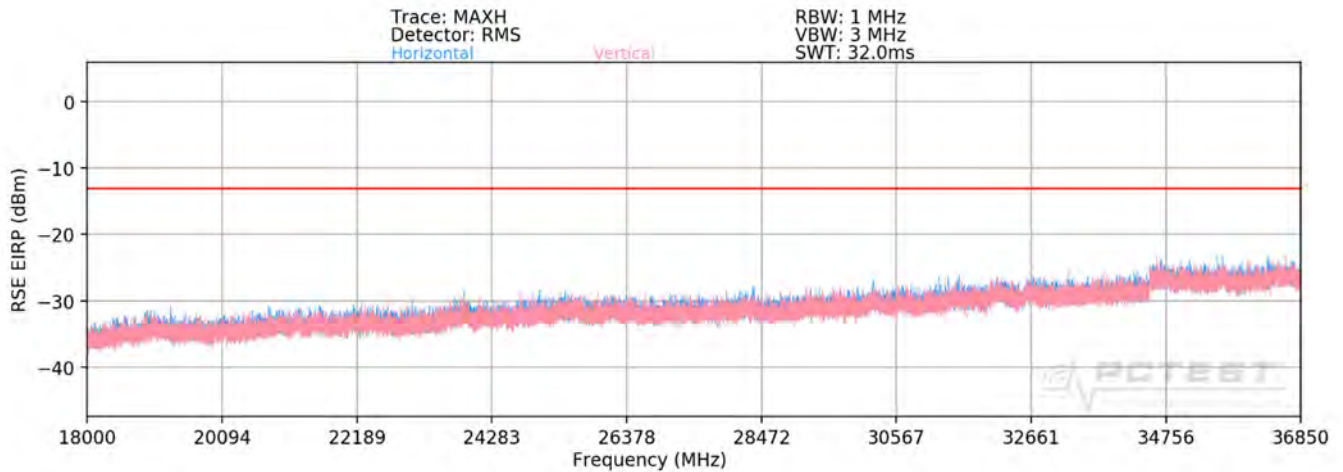

**Plot 7-158. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 153 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36639.02	Low	50	H	QPSK	H	111	86	-31.93	-13.00	-18.93
36644.20	Low	50	V	QPSK	V	84	74	-31.42	-13.00	-18.42
36713.40	Mid	50	H	QPSK	H	112	54	-31.05	-13.00	-18.05
36537.70	Mid	50	V	QPSK	V	88	65	-31.77	-13.00	-18.77
36843.72	High	50	H	QPSK	H	119	34	-30.60	-13.00	-17.60
36979.30	High	50	V	QPSK	V	91	48	-30.99	-13.00	-17.99

**Table 7-101. Ant1 - SISO -Spurious Emissions Table (18GHz – 36.85GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-28.65	-13.00	-15.65
Mid	50	QPSK	-28.39	-13.00	-15.39
High	50	QPSK	-27.78	-13.00	-14.78

**Table 7-102. Ant1 - MIMO -Spurious Emissions Table (18GHz – 36.85GHz)**

### Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 154 of 286	



**40.15GHz - 60GHz**

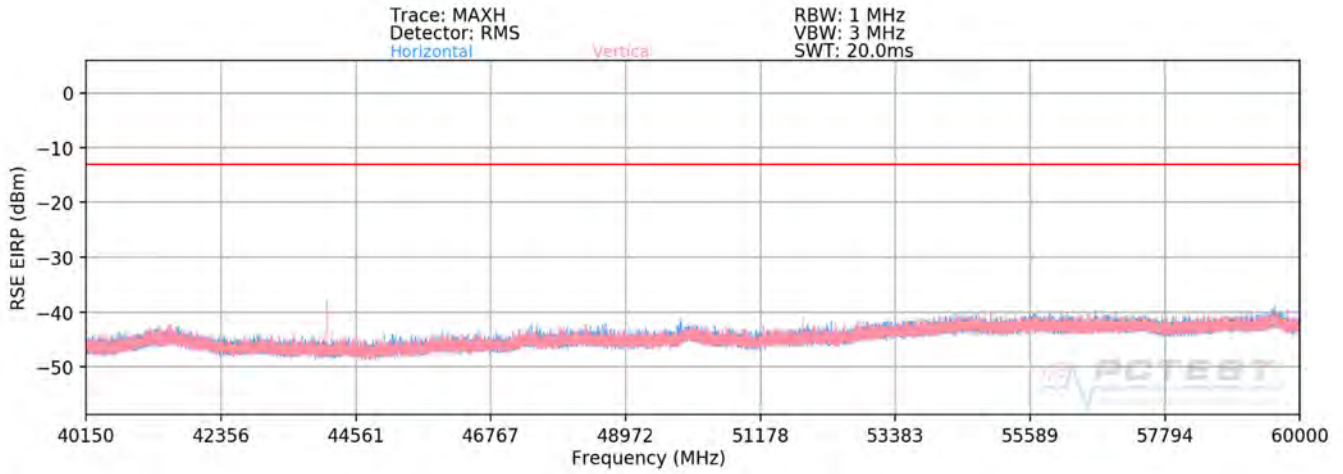

**Plot 7-159. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

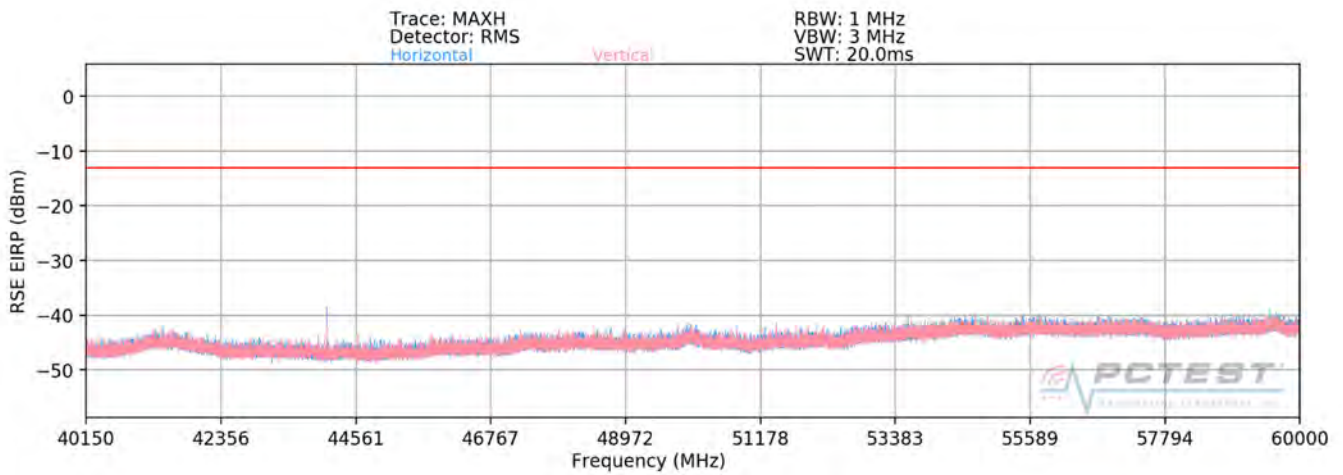

**Plot 7-160. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 155 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
44083.16	Low	50	H	QPSK	V	358	155	-29.47	-13.00	-16.47
44083.19	Low	50	V	QPSK	V	350	150	-31.49	-13.00	-18.49
44083.15	Mid	50	H	QPSK	V	9	158	-29.61	-13.00	-16.61
44083.16	Mid	50	V	QPSK	V	10	155	-30.49	-13.00	-17.49
44083.16	High	50	H	QPSK	V	170	155	-32.97	-13.00	-19.97
44083.16	High	50	V	QPSK	V	175	150	-31.55	-13.00	-18.55

**Table 7-103. Ant1 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-27.35	-13.00	-14.35
Mid	50	QPSK	-27.02	-13.00	-14.02
High	50	QPSK	-29.19	-13.00	-16.19

**Table 7-104. Ant1 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 156 of 286	

**60GHz - 90GHz**

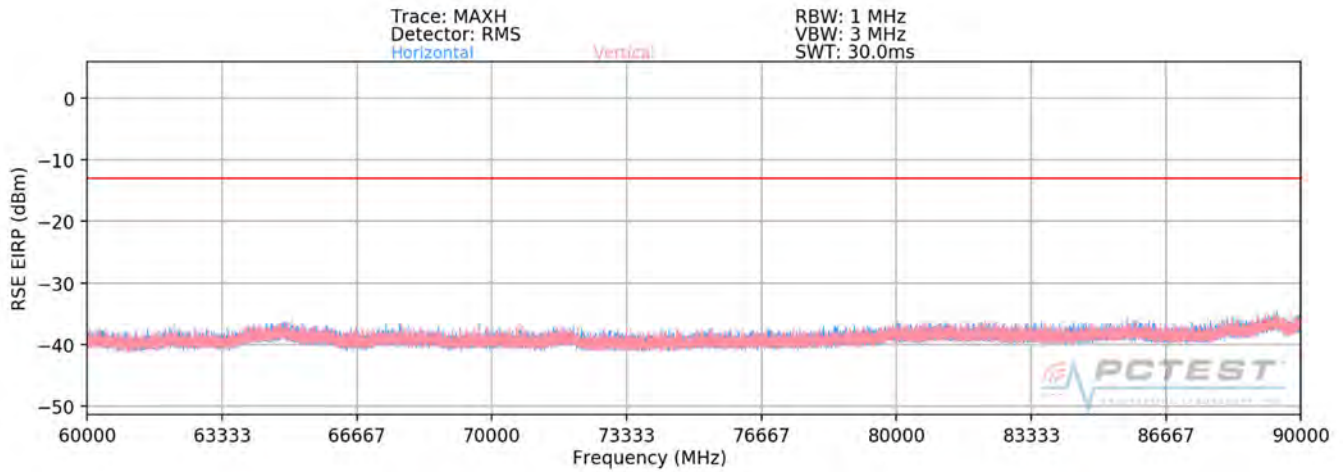

**Plot 7-161. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

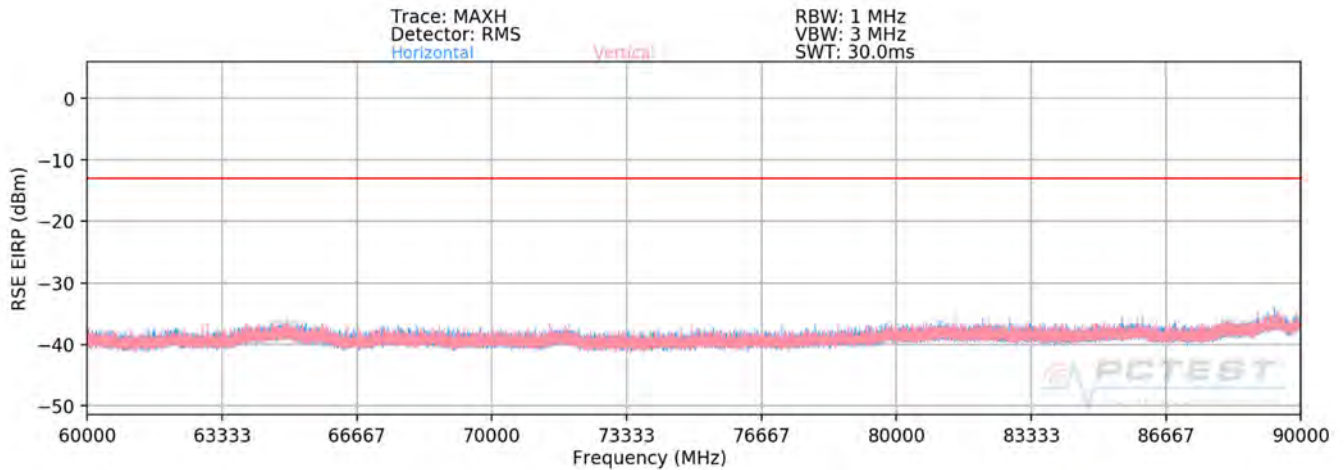

**Plot 7-162. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 157 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74056.80	Low	50	H	QPSK	H	168	8	-49.47	-13.00	-36.47
74056.20	Low	50	V	QPSK	H	144	11	-50.40	-13.00	-37.40
76994.70	Mid	50	H	QPSK	H	-	-	-54.63	-13.00	-41.63
76996.02	Mid	50	V	QPSK	H	143	0	-53.17	-13.00	-40.17
79942.92	High	50	H	QPSK	H	-	-	-53.89	-13.00	-40.89
79924.86	High	50	V	QPSK	H	-	-	-53.90	-13.00	-40.90

**Table 7-105. Ant1 - SISO -Spurious Emissions Table (60GHz - 90GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-46.90	-13.00	-33.90
Mid	50	QPSK	-50.83	-13.00	-37.83
High	50	QPSK	-50.88	-13.00	-37.88

**Table 7-106. Ant1 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 158 of 286	

**90GHz - 140GHz**

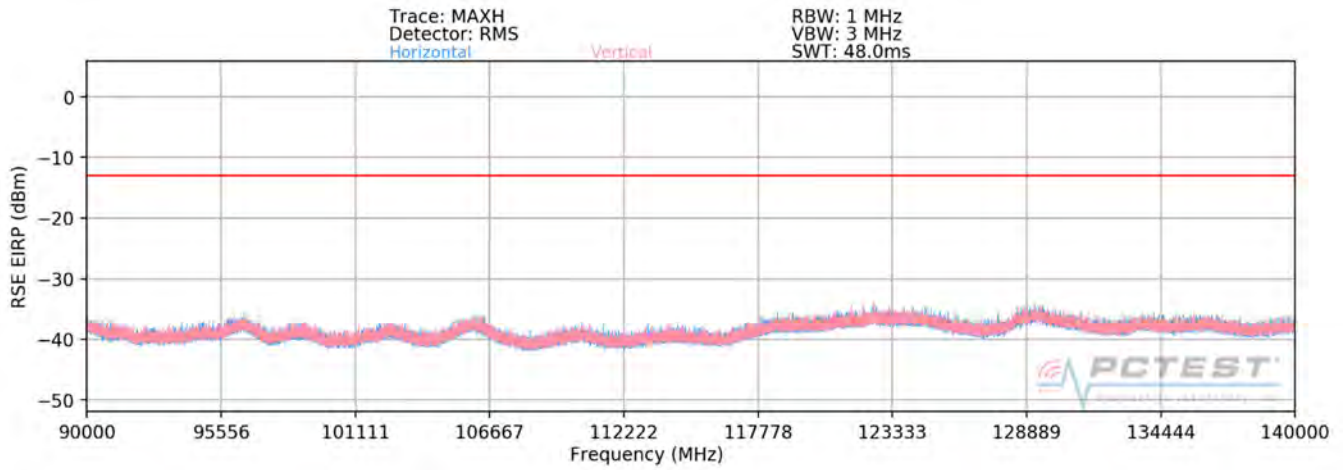

**Plot 7-163. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

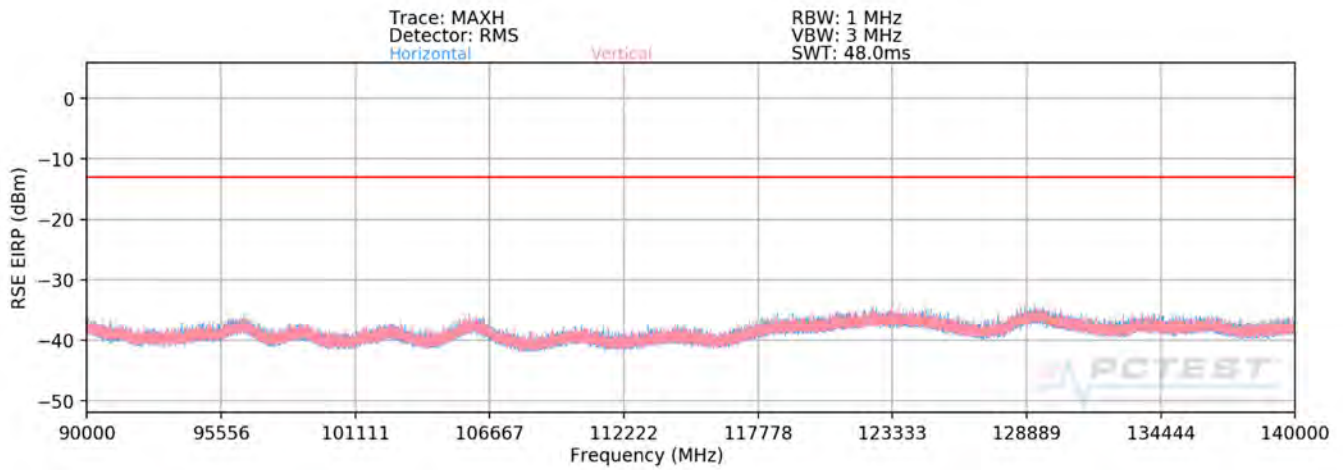

**Plot 7-164. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 159 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111083.73	Low	50	H	QPSK	V	319	105	-43.66	-13.00	-30.66
111083.64	Low	50	V	QPSK	V	38	276	-43.76	-13.00	-30.76
115500.72	Mid	50	H	QPSK	V	-	-	-51.16	-13.00	-38.16
115503.51	Mid	50	V	QPSK	V	-	-	-51.28	-13.00	-38.28
119885.67	High	50	H	QPSK	V	-	-	-48.94	-13.00	-35.94
119905.11	High	50	V	QPSK	V	-	-	-49.02	-13.00	-36.02

**Table 7-107. Ant1 - SISO -Spurious Emissions Table (90GHz - 140GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-40.70	-13.00	-27.70
Mid	50	QPSK	-48.21	-13.00	-35.21
High	50	QPSK	-45.97	-13.00	-32.97

**Table 7-108. Ant1 - MIMO -Spurious Emissions Table (90GHz - 140GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 160 of 286	

**140GHz - 170GHz**

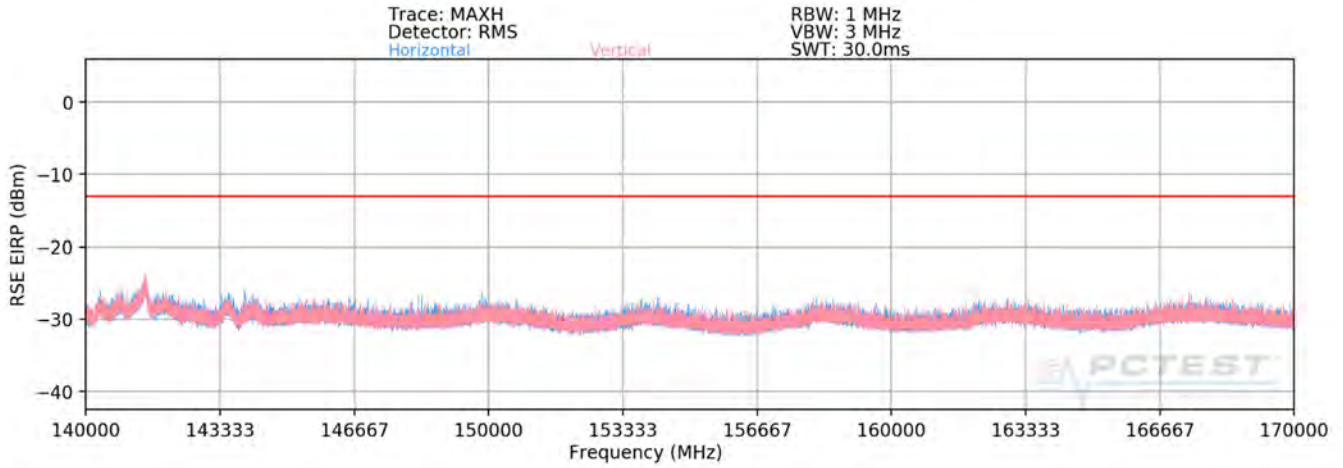

**Plot 7-165. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

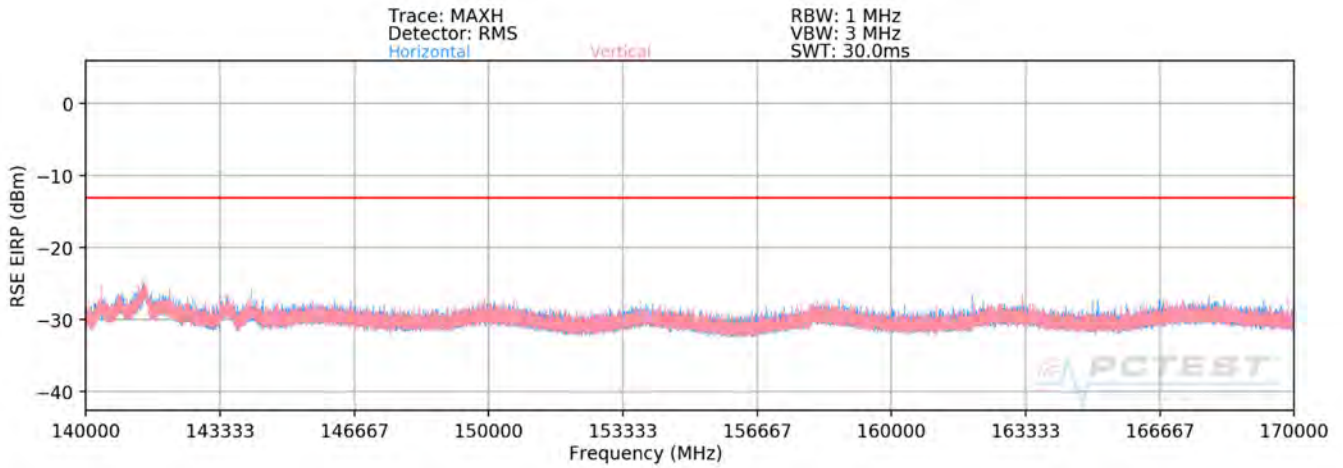

**Plot 7-166. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 161 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
141443.00	Low	50	H	QPSK	V	-	-	-32.39	-13.00	-19.39
141472.50	Low	50	V	QPSK	V	-	-	-32.71	-13.00	-19.71
141478.00	Mid	50	H	QPSK	V	-	-	-32.83	-13.00	-19.83
141456.00	Mid	50	V	QPSK	V	-	-	-33.12	-13.00	-20.12
141462.50	High	50	H	QPSK	V	-	-	-32.38	-13.00	-19.38
141431.50	High	50	V	QPSK	V	-	-	-32.42	-13.00	-19.42

**Table 7-109. Ant1 - SISO -Spurious Emissions Table (140GHz - 170GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-29.54	-13.00	-16.54
Mid	50	QPSK	-29.96	-13.00	-16.96
High	50	QPSK	-29.39	-13.00	-16.39

**Table 7-110. Ant1 - MIMO -Spurious Emissions Table (140GHz - 170GHz)**

### Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 162 of 286	



**170GHz - 200GHz**

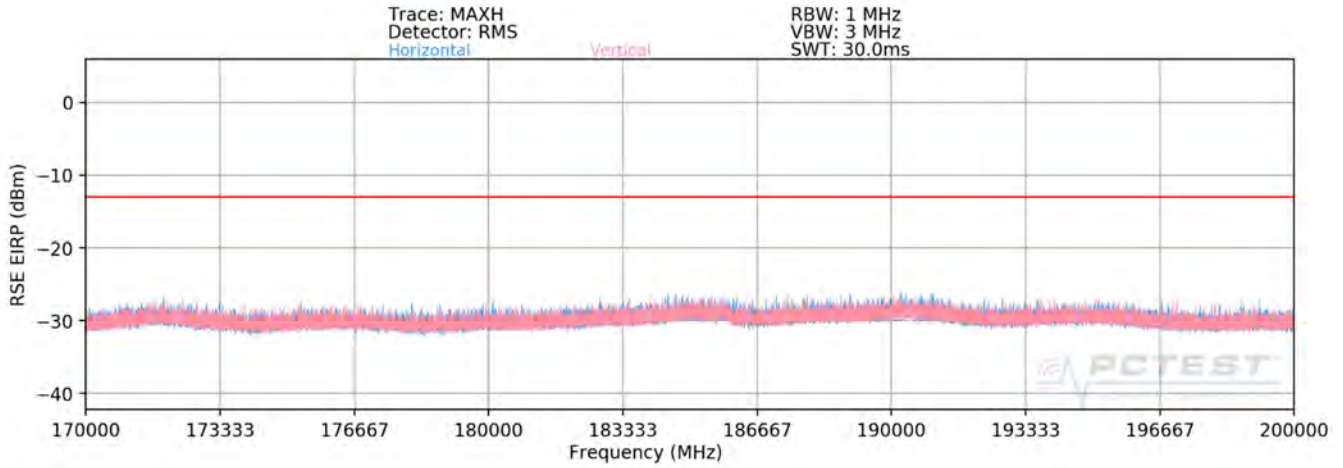

**Plot 7-167. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

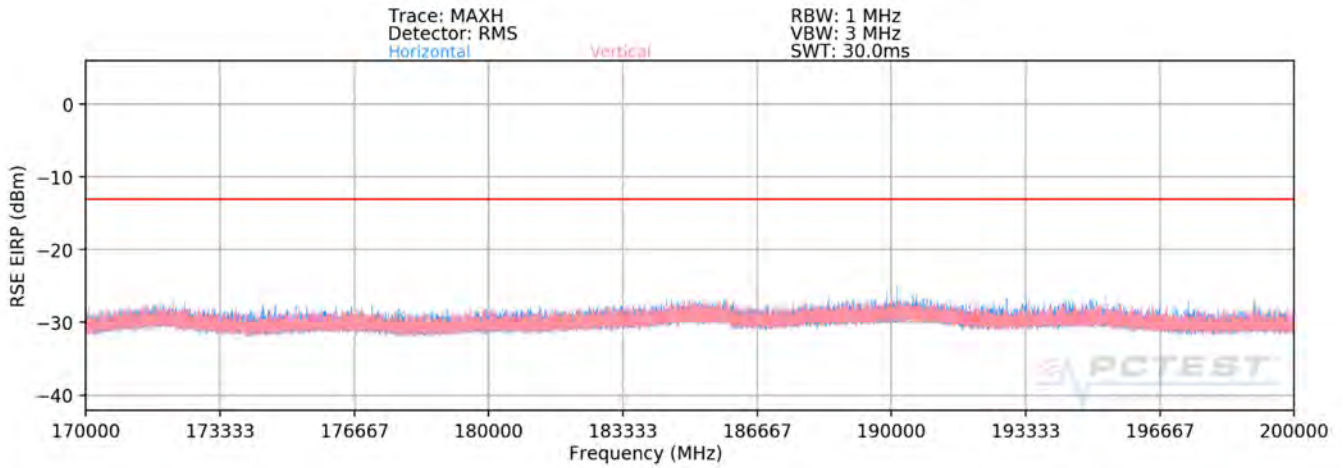

**Plot 7-168. Ant1-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 163 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
171998.50	Low	50	H	QPSK	V	-	-	-34.95	-13.00	-21.95
172330.00	Low	50	V	QPSK	V	-	-	-35.16	-13.00	-22.16
191044.00	Mid	50	H	QPSK	V	-	-	-35.01	-13.00	-22.01
191058.50	Mid	50	V	QPSK	V	-	-	-35.24	-13.00	-22.24
172031.50	High	50	H	QPSK	V	-	-	-35.06	-13.00	-22.06
172094.00	High	50	V	QPSK	V	-	-	-35.20	-13.00	-22.20

**Table 7-111. Ant1 - SISO -Spurious Emissions Table (170GHz - 200GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.05	-13.00	-19.05
Mid	50	QPSK	-32.11	-13.00	-19.11
High	50	QPSK	-32.12	-13.00	-19.12

**Table 7-112. Ant1 - MIMO -Spurious Emissions Table (170GHz - 200GHz)**

### Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 164 of 286	

**Band n260- Ant2**

**30MHz - 1GHz**

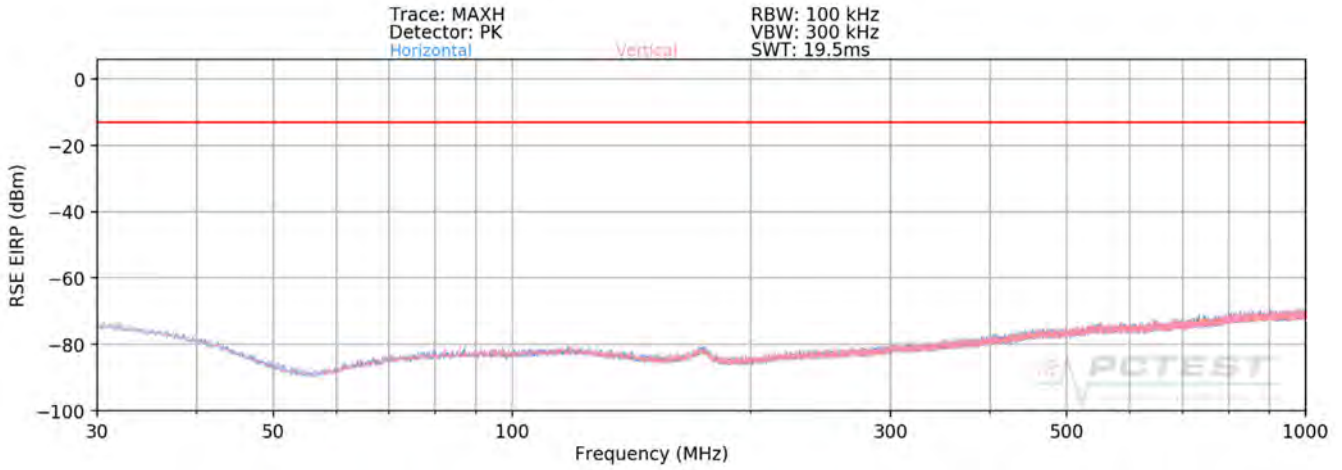


**Plot 7-169. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam)**

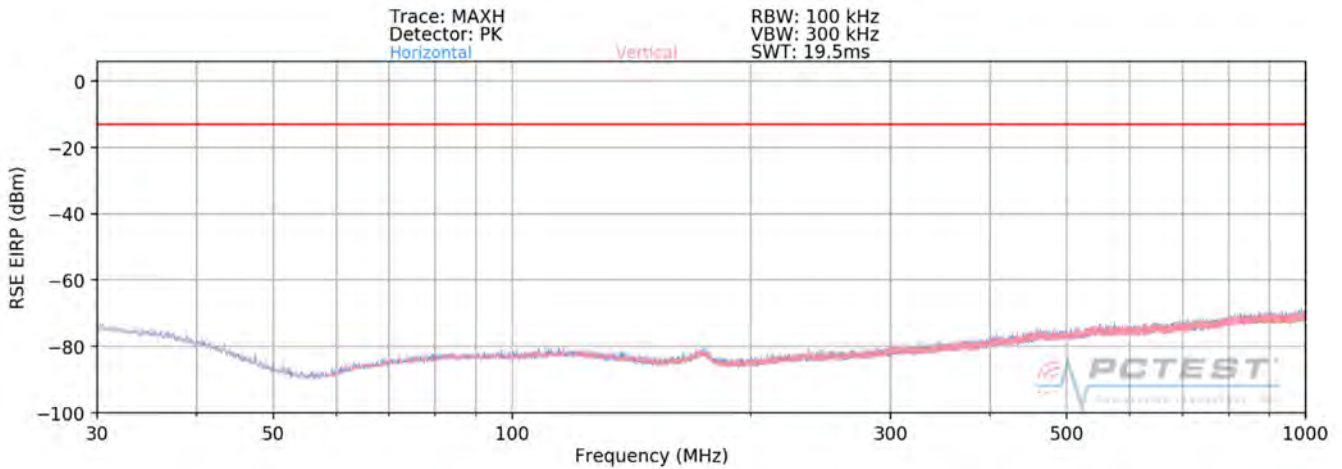


**Plot 7-170. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 165 of 286

**1GHz - 18GHz**

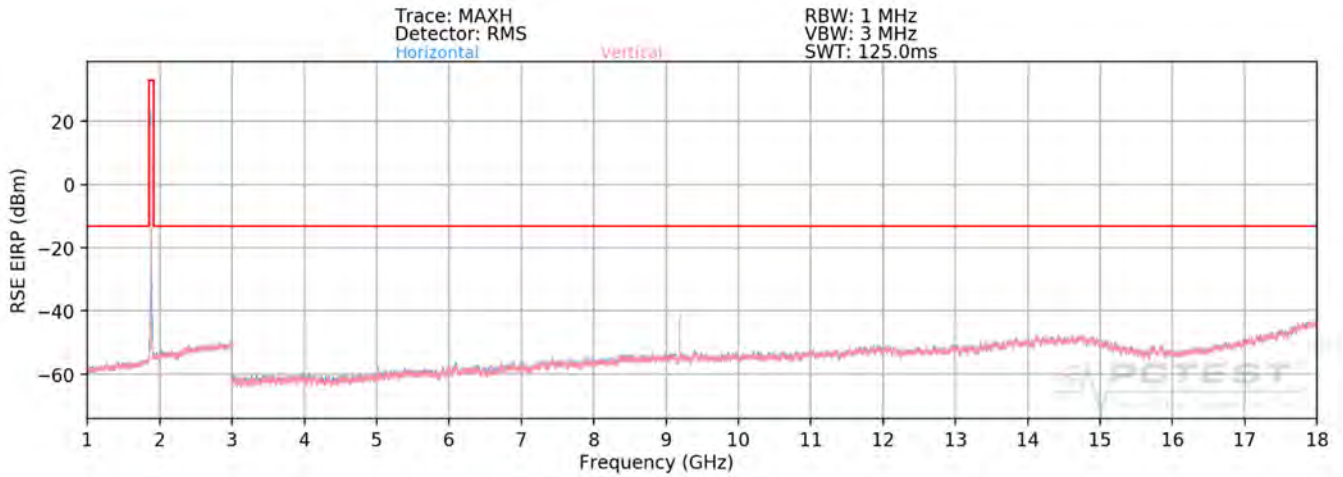

**Plot 7-171. Ant2-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel H Beam – ENDC)**

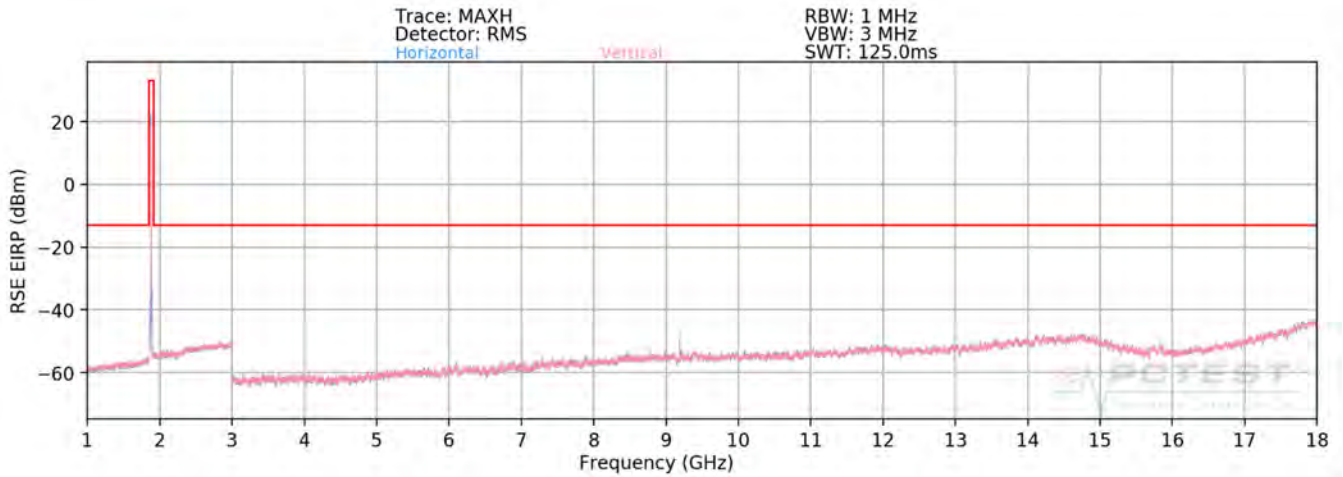

**Plot 7-172. Ant2-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 166 of 286	

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8407.15	Low	50	H	QPSK	V	155	332	-46.83	-13.00	-33.83
8407.15	Low	50	V	QPSK	H	240	8	-48.14	-13.00	-35.14
9109.17	Mid	50	H	QPSK	V	214	346	-41.72	-13.00	-28.72
9109.17	Mid	50	V	QPSK	H	161	312	-46.27	-13.00	-33.27
9144.46	High	50	H	QPSK	V	145	350	-43.12	-13.00	-30.12
9144.46	High	50	V	QPSK	H	143	315	-47.69	-13.00	-34.69

**Table 7-113. Ant2 - SISO -Spurious Emissions Table (1GHz - 18GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-44.43	-13.00	-31.43
Mid	50	QPSK	-40.41	-13.00	-27.41
High	50	QPSK	-41.82	-13.00	-28.82

**Table 7-114. Ant2 - MIMO -Spurious Emissions Table (1GHz - 18GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 167 of 286	

18GHz – 36.85GHz

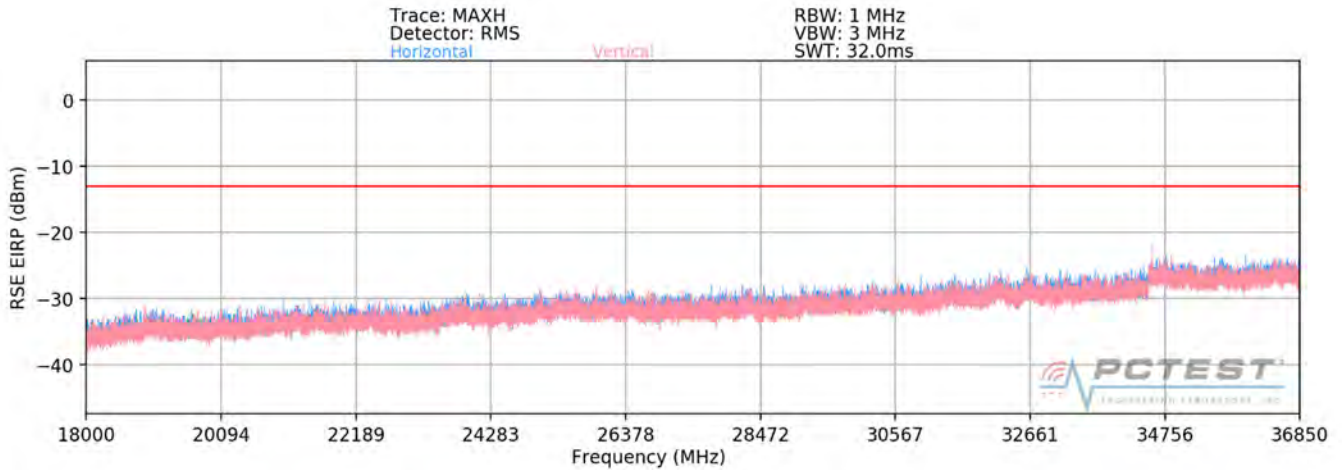

Plot 7-173. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)

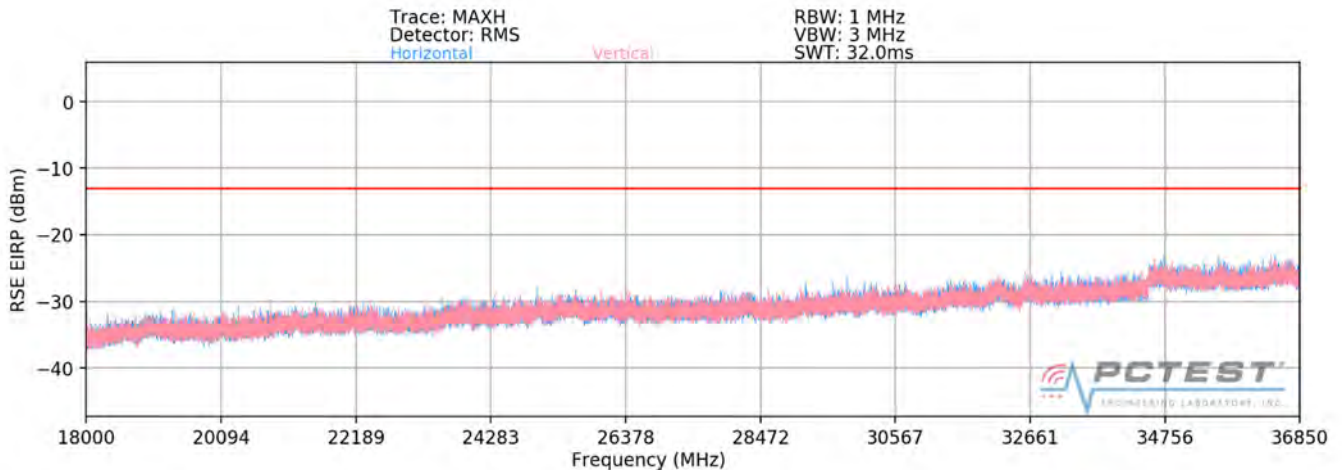

Plot 7-174. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 168 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36701.70	Low	50	H	QPSK	H	120	55	-31.39	-13.00	-18.39
36420.20	Low	50	V	QPSK	V	145	23	-31.17	-13.00	-18.17
36985.15	Mid	50	H	QPSK	H	149	54	-31.74	-13.00	-18.74
36999.10	Mid	50	V	QPSK	V	157	33	-30.38	-13.00	-17.38
36725.50	High	50	H	QPSK	H	118	45	-31.25	-13.00	-18.25
36663.50	High	50	V	QPSK	V	55	124	-30.88	-13.00	-17.88

**Table 7-115. Ant2 - SISO -Spurious Emissions Table (18GHz – 36.85GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-28.27	-13.00	-15.27
Mid	50	QPSK	-27.99	-13.00	-14.99
High	50	QPSK	-28.05	-13.00	-15.05

**Table 7-116. Ant2 - MIMO -Spurious Emissions Table (18GHz – 36.85GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 169 of 286	

### 40.15GHz - 60GHz

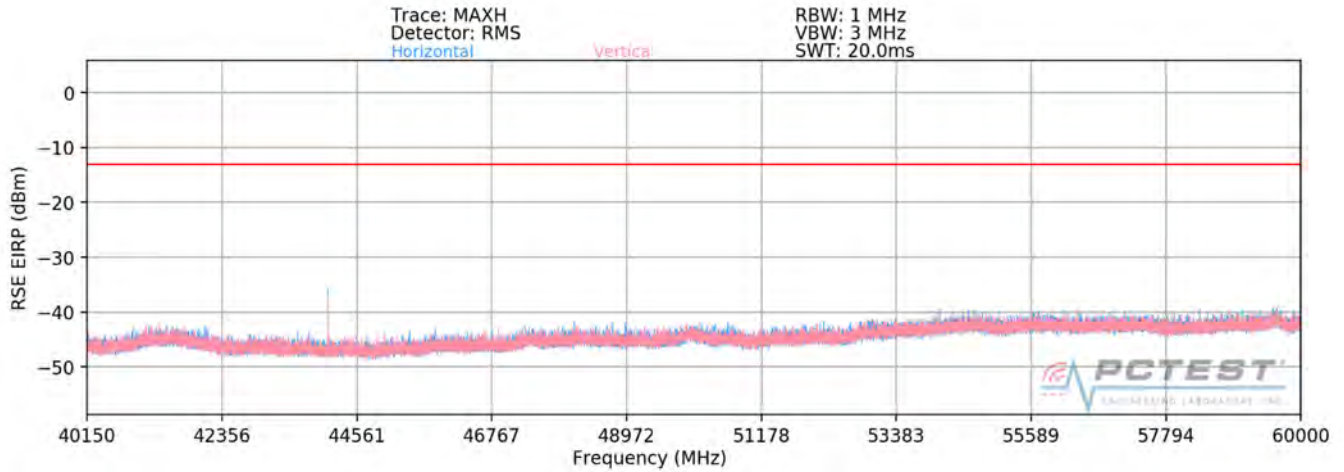

**Plot 7-175. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

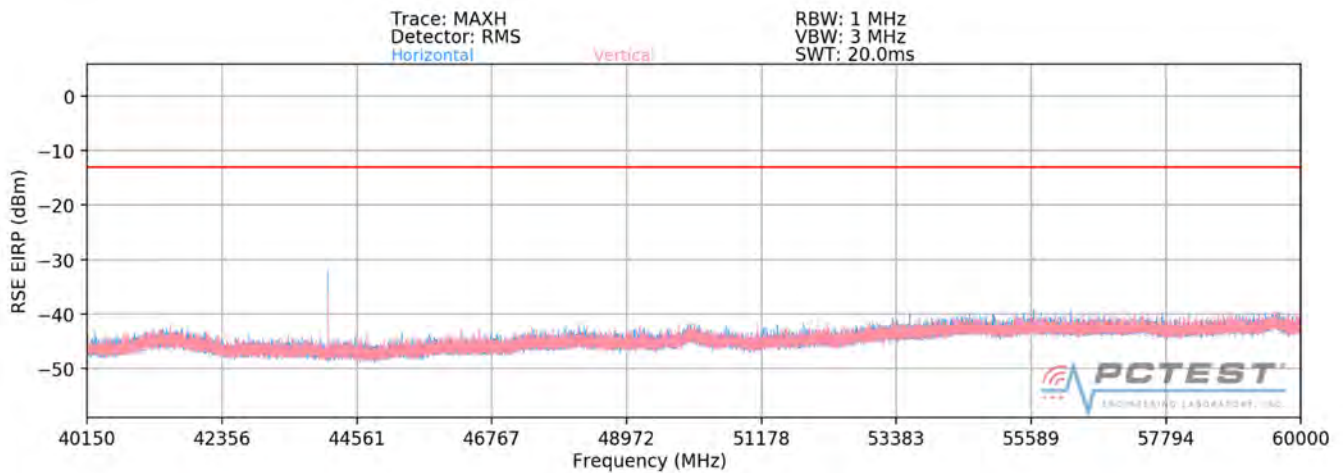

**Plot 7-176. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 170 of 286



## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
44083.13	Low	50	H	QPSK	V	129	150	-29.17	-13.00	-16.17
44083.30	Low	50	V	QPSK	V	180	153	-30.25	-13.00	-17.25
44083.14	Mid	50	H	QPSK	V	130	155	-30.14	-13.00	-17.14
44083.04	Mid	50	V	QPSK	V	179	153	-32.32	-13.00	-19.32
44083.15	High	50	H	QPSK	V	125	155	-31.73	-13.00	-18.73
44083.15	High	50	V	QPSK	V	181	155	-30.65	-13.00	-17.65

**Table 7-117. Ant2 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-26.67	-13.00	-13.67
Mid	50	QPSK	-28.08	-13.00	-15.08
High	50	QPSK	-28.14	-13.00	-15.14

**Table 7-118. Ant2 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 171 of 286	

**60GHz - 90GHz**

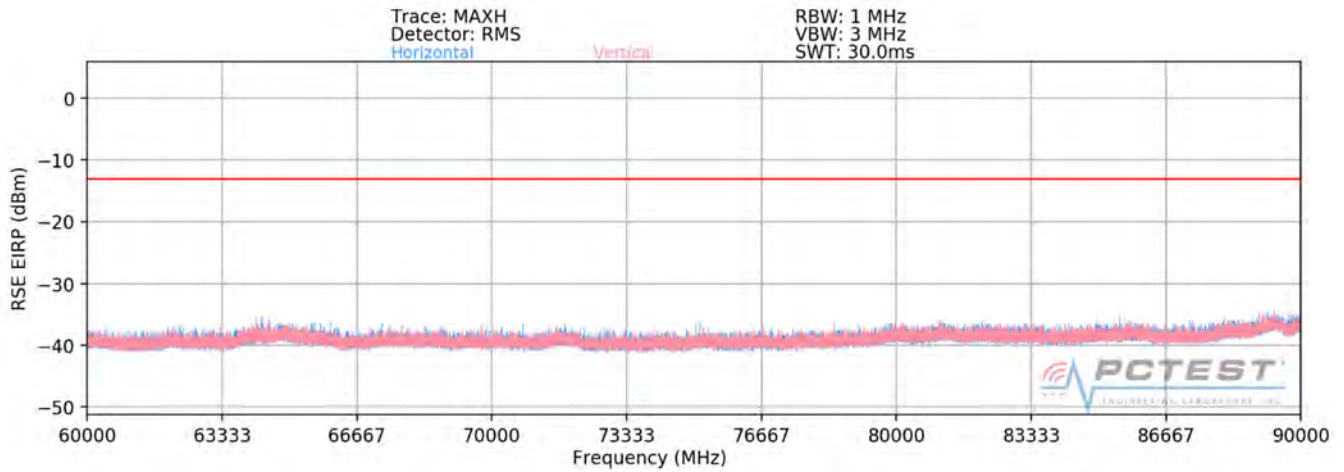

**Plot 7-177. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

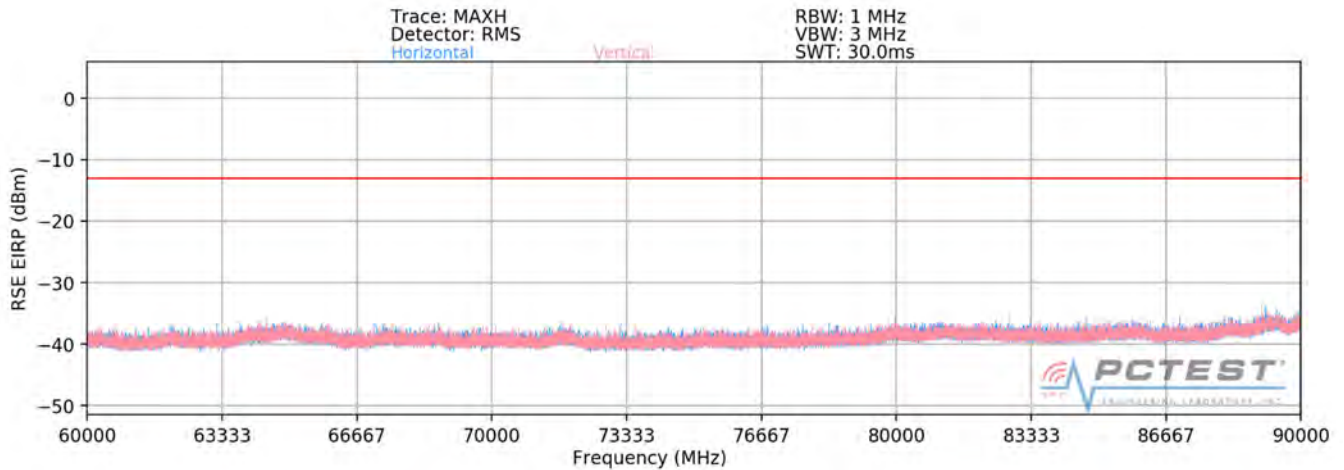

**Plot 7-178. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 172 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74056.14	Low	50	H	QPSK	H	287	167	-53.54	-13.00	-40.54
74055.60	Low	50	V	QPSK	V	272	77	-54.23	-13.00	-41.23
76996.41	Mid	50	H	QPSK	H	76	257	-50.50	-13.00	-37.50
76995.99	Mid	50	V	QPSK	V	99	321	-51.70	-13.00	-38.70
79933.95	High	50	H	QPSK	H	248	14	-52.67	-13.00	-39.67
79933.77	High	50	V	QPSK	V	76	264	-47.91	-13.00	-34.91

**Table 7-119. Ant2 - SISO -Spurious Emissions Table (60GHz - 90GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-50.86	-13.00	-37.86
Mid	50	QPSK	-48.05	-13.00	-35.05
High	50	QPSK	-46.66	-13.00	-33.66

**Table 7-120. Ant2 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 173 of 286	

**90GHz - 140GHz**

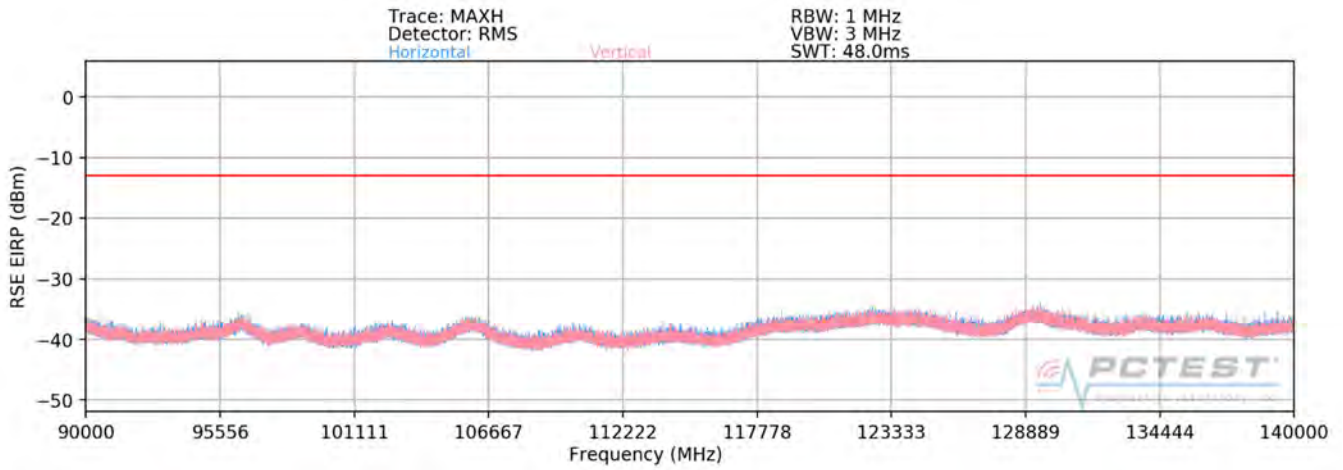

**Plot 7-179. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

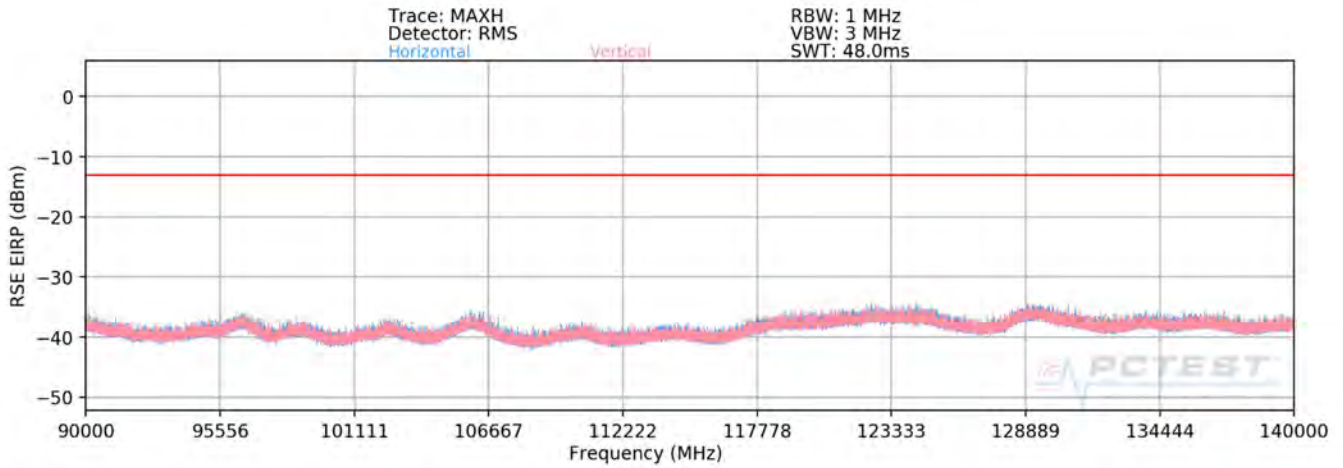

**Plot 7-180. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 174 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111083.34	Low	50	H	QPSK	H	48	354	-49.90	-13.00	-36.90
111082.08	Low	50	V	QPSK	H	-	-	-51.24	-13.00	-38.24
115494.93	Mid	50	H	QPSK	H	-	-	-51.44	-13.00	-38.44
115504.14	Mid	50	V	QPSK	H	-	-	-51.38	-13.00	-38.38
119900.40	High	50	H	QPSK	H	337	49	-44.98	-13.00	-31.98
119900.58	High	50	V	QPSK	H	283	49	-43.30	-13.00	-30.30

**Table 7-121. Ant2 - SISO -Spurious Emissions Table (90GHz - 140GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-47.51	-13.00	-34.51
Mid	50	QPSK	-48.40	-13.00	-35.40
High	50	QPSK	-41.05	-13.00	-28.05

**Table 7-122. Ant2 - MIMO -Spurious Emissions Table (90GHz - 140GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 175 of 286	

**140GHz - 170GHz**

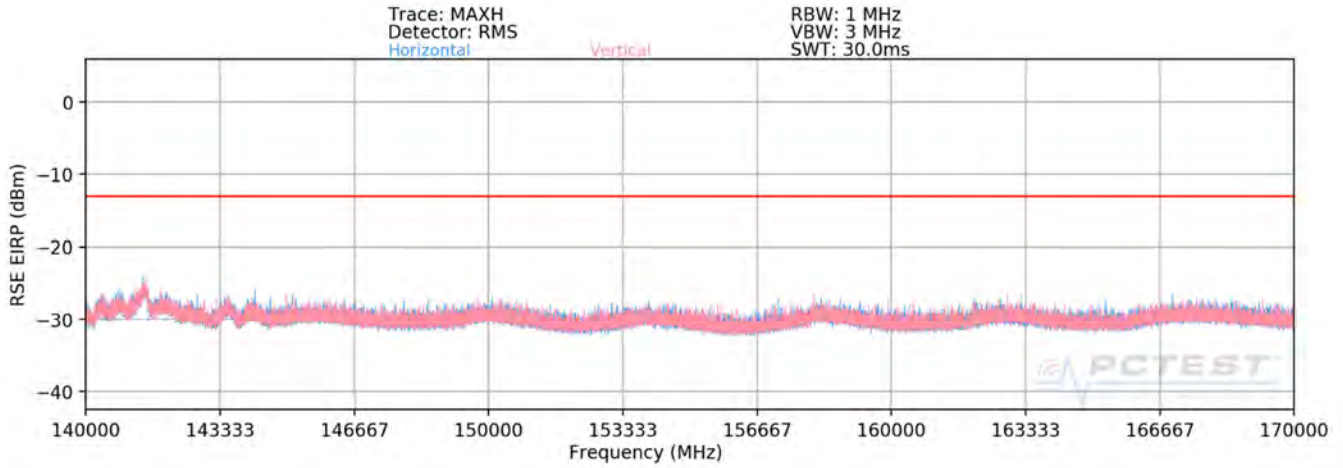

**Plot 7-181. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

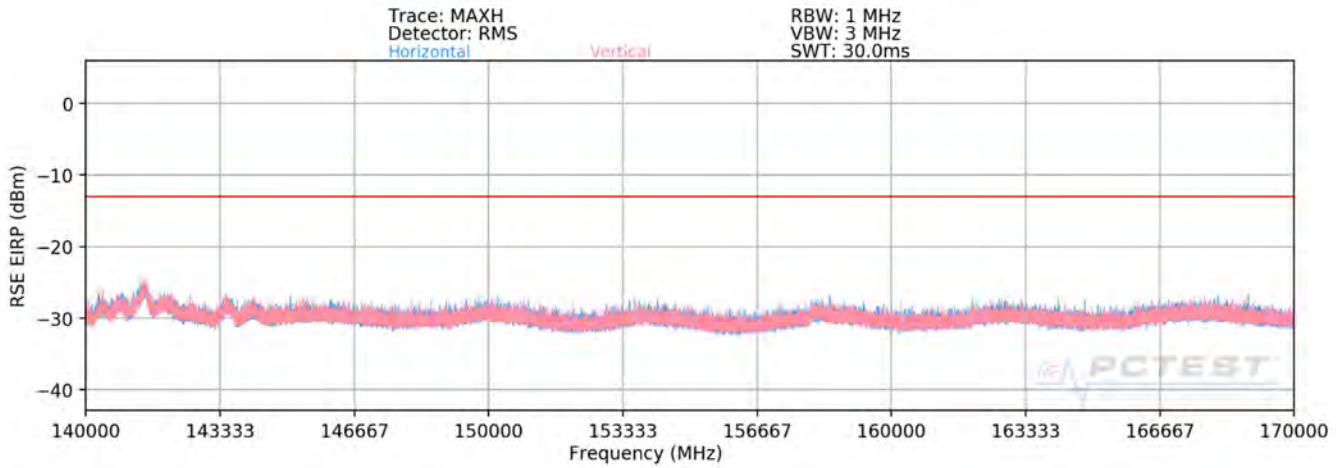

**Plot 7-182. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

<p>FCC ID: A3LSMG986U</p>		<p align="center"><b>MEASUREMENT REPORT (CERTIFICATION)</b></p> 	<p>Approved by: Quality Manager</p>
<p>Test Report S/N: 1M1910220166-06-R1.A3L</p>	<p>Test Dates: 10/11 - 12/06/2019</p>	<p>EUT Type: Portable Handset</p>	<p>Page 176 of 286</p>

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
141445.50	Low	50	H	QPSK	H	-	-	-32.58	-13.00	-19.58
141490.50	Low	50	V	QPSK	H	-	-	-32.38	-13.00	-19.38
141472.00	Mid	50	H	QPSK	H	-	-	-32.39	-13.00	-19.39
141432.50	Mid	50	V	QPSK	H	-	-	-32.78	-13.00	-19.78
141465.50	High	50	H	QPSK	H	-	-	-32.50	-13.00	-19.50
141472.50	High	50	V	QPSK	H	-	-	-32.80	-13.00	-19.80

**Table 7-123. Ant2 - SISO -Spurious Emissions Table (140GHz - 170GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-29.47	-13.00	-16.47
Mid	50	QPSK	-29.57	-13.00	-16.57
High	50	QPSK	-29.64	-13.00	-16.64

**Table 7-124. Ant2 - MIMO -Spurious Emissions Table (140GHz - 170GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 177 of 286	

**170GHz - 200GHz**

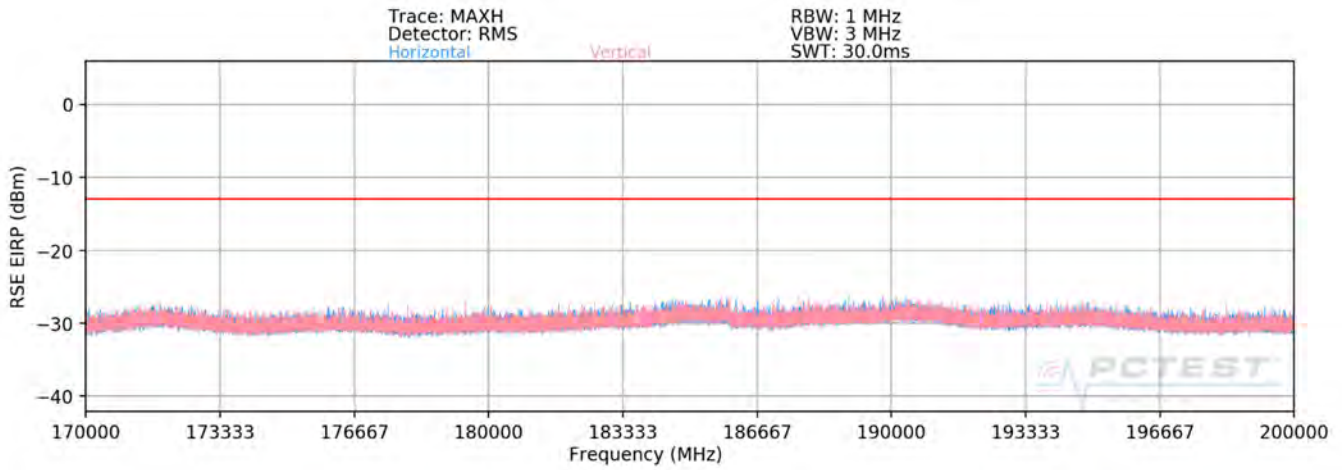

**Plot 7-183. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

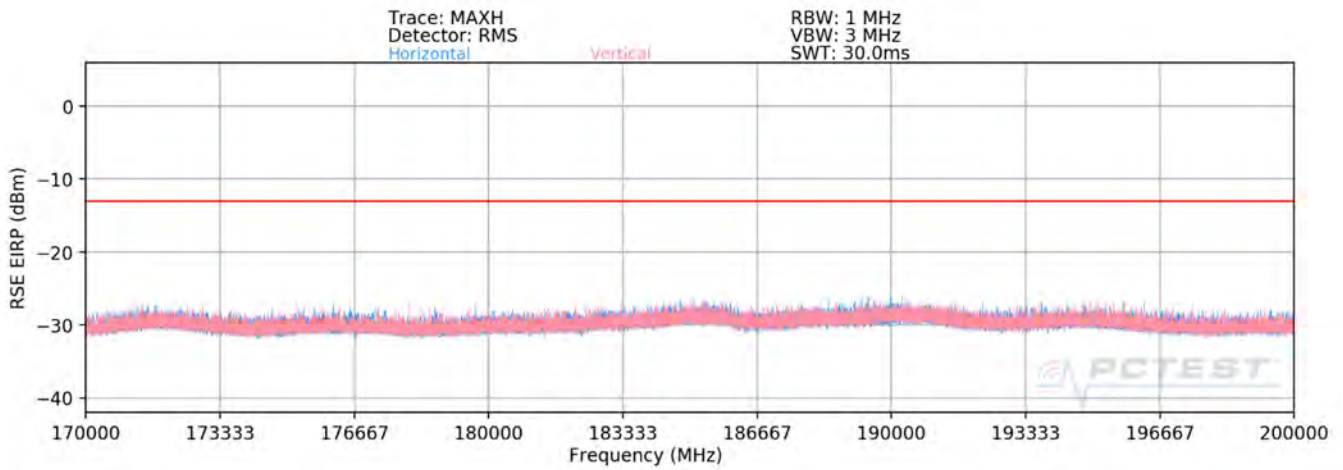

**Plot 7-184. Ant2-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 178 of 286



## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
172061.00	Low	50	H	QPSK	H	-	-	-35.28	-13.00	-22.28
172060.50	Low	50	V	QPSK	H	-	-	-35.10	-13.00	-22.10
171935.50	Mid	50	H	QPSK	H	-	-	-35.09	-13.00	-22.09
190916.50	Mid	50	V	QPSK	H	-	-	-35.17	-13.00	-22.17
171886.00	High	50	H	QPSK	H	-	-	-34.85	-13.00	-21.85
171822.00	High	50	V	QPSK	H	-	-	-35.15	-13.00	-22.15

**Table 7-125. Ant2 - SISO -Spurious Emissions Table (170GHz - 200GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.18	-13.00	-19.18
Mid	50	QPSK	-32.12	-13.00	-19.12
High	50	QPSK	-31.98	-13.00	-18.98

**Table 7-126. Ant2 - MIMO -Spurious Emissions Table (170GHz - 200GHz)**

### Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 179 of 286	

**Band n260- Ant3**

**30MHz - 1GHz**

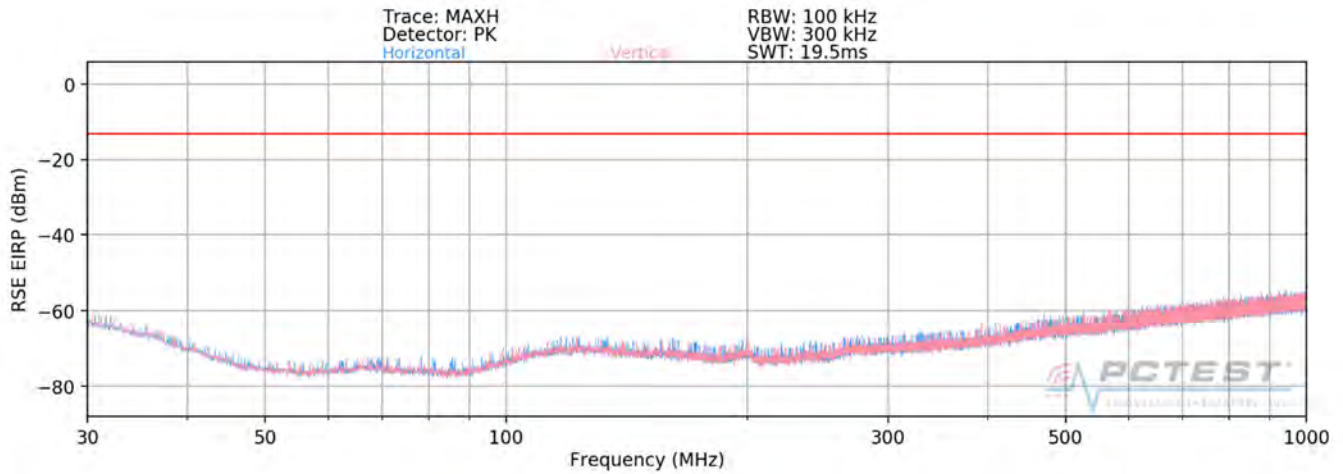


**Plot 7-185. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam)**

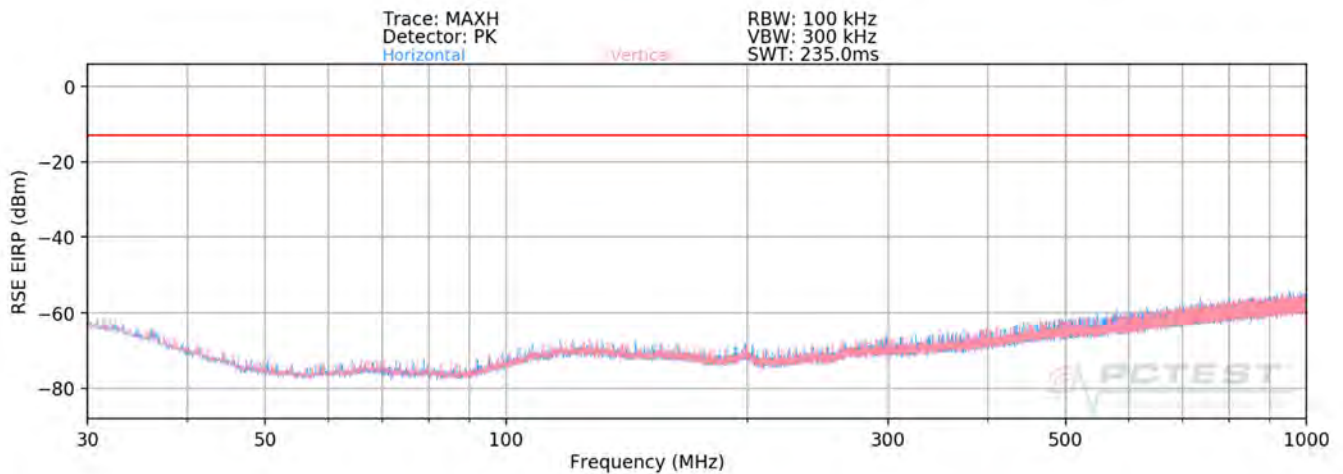


**Plot 7-186. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 180 of 286

**1GHz - 18GHz**

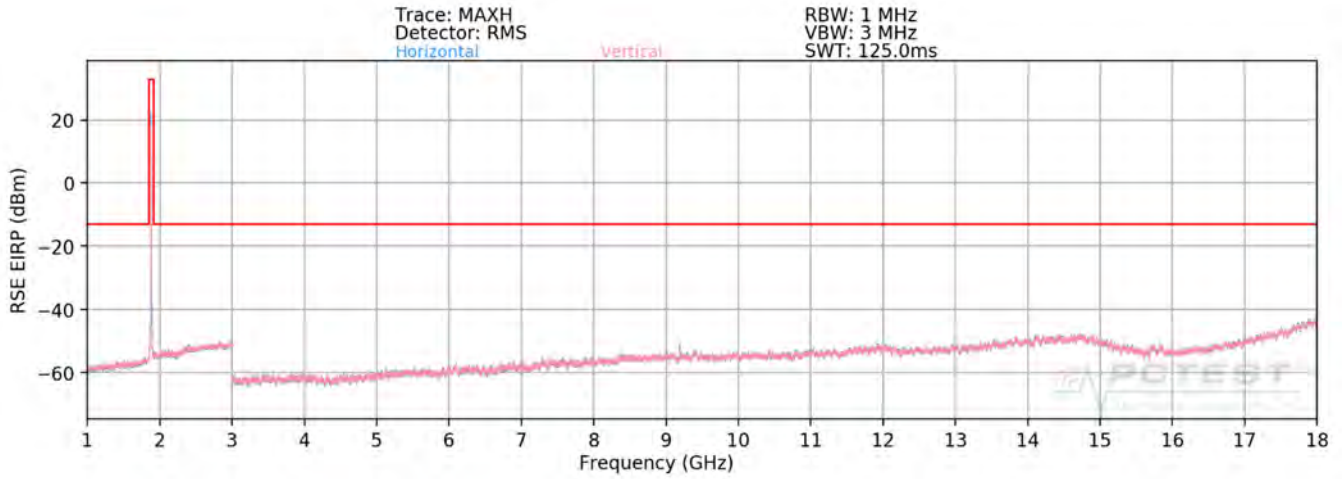

**Plot 7-187. Ant3-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel H Beam – ENDC)**

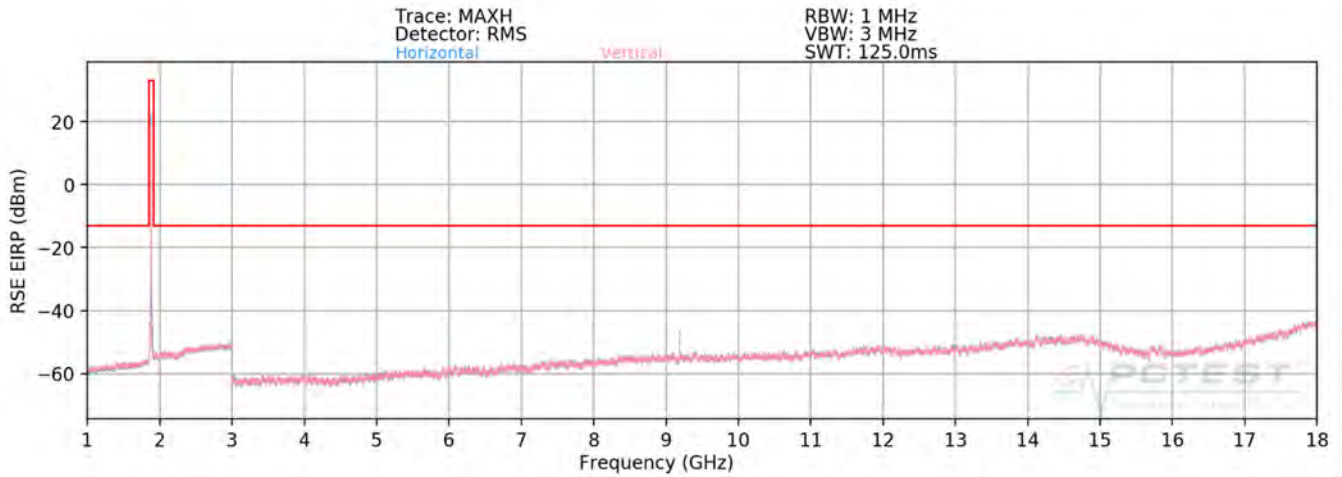

**Plot 7-188. Ant3-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 181 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8407.15	Low	50	H	QPSK	H	209	3	-52.57	-13.00	-39.57
8407.15	Low	50	V	QPSK	H	183	30	-50.09	-13.00	-37.09
9109.17	Mid	50	H	QPSK	H	165	59	-48.14	-13.00	-35.14
9109.17	Mid	50	V	QPSK	H	158	7	-48.73	-13.00	-35.73
9144.46	High	50	H	QPSK	H	148	61	-48.83	-13.00	-35.83
9144.46	High	50	V	QPSK	H	148	5	-48.67	-13.00	-35.67

**Table 7-127. Ant3 - SISO -Spurious Emissions Table (1GHz - 18GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-48.15	-13.00	-35.15
Mid	50	QPSK	-45.77	-13.00	-32.77
High	50	QPSK	-45.74	-13.00	-32.74

**Table 7-128. Ant3 - MIMO -Spurious Emissions Table (1GHz - 18GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 182 of 286	

**18GHz – 36.85GHz**

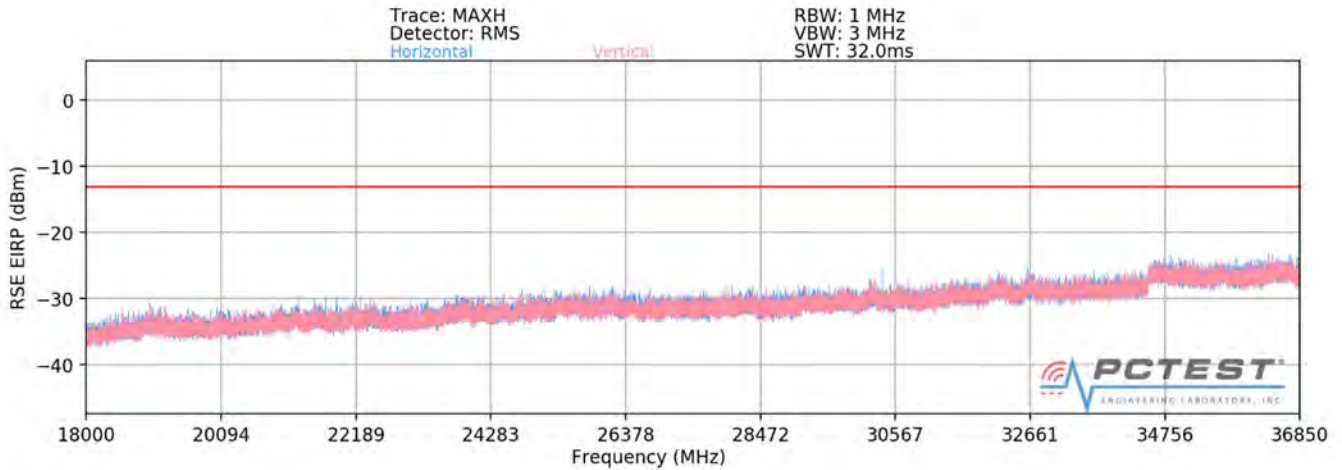

**Plot 7-189. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

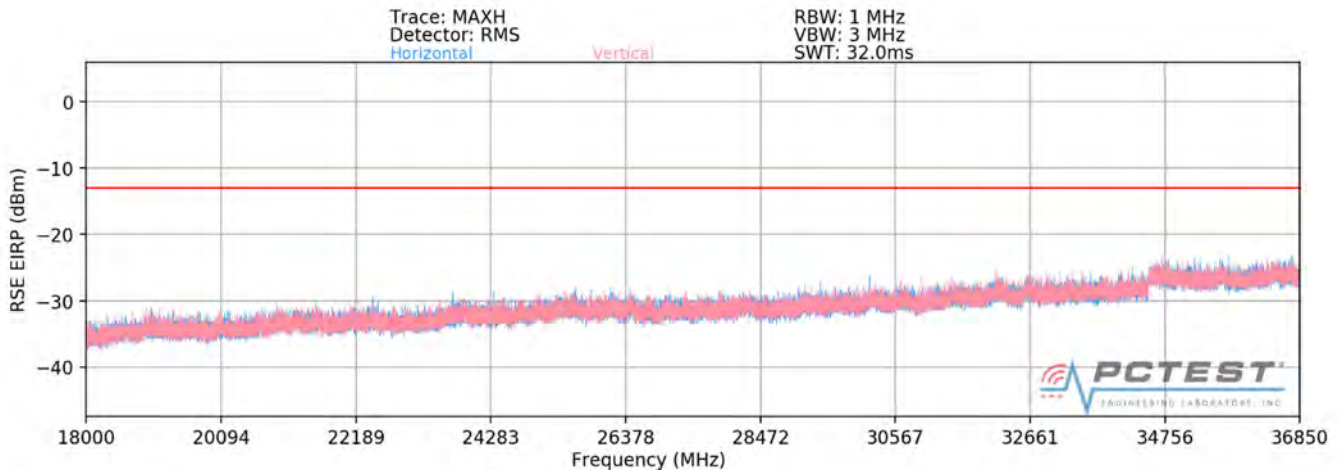

**Plot 7-190. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 183 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
34669.80	Low	50	H	QPSK	H	-	-	-31.82	-13.00	-18.82
34545.90	Low	50	V	QPSK	V	-	-	-31.44	-13.00	-18.44
36480.10	Mid	50	H	QPSK	H	-	-	-30.19	-13.00	-17.19
36683.50	Mid	50	V	QPSK	V	-	-	-30.88	-13.00	-17.88
36452.20	High	50	H	QPSK	H	-	-	-31.00	-13.00	-18.00
36746.50	High	50	V	QPSK	V	-	-	-31.01	-13.00	-18.01

**Table 7-129. Ant3 - SISO -Spurious Emissions Table (18GHz – 36.85GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-28.61	-13.00	-15.61
Mid	50	QPSK	-27.51	-13.00	-14.51
High	50	QPSK	-28.00	-13.00	-15.00

**Table 7-130. Ant3 - MIMO -Spurious Emissions Table (18GHz – 36.85GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 184 of 286	

### 40.15GHz - 60GHz

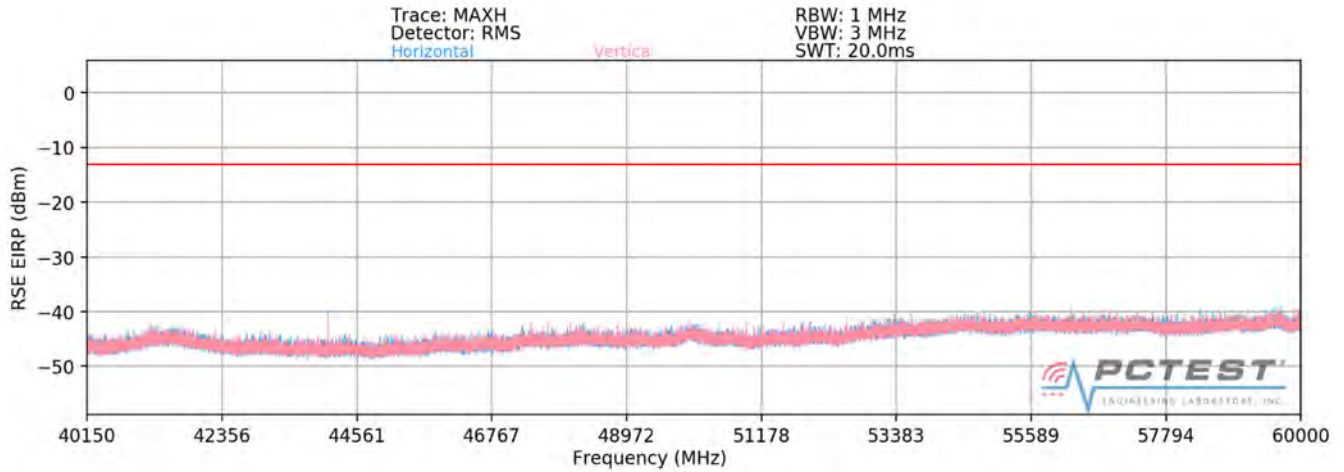

**Plot 7-191. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

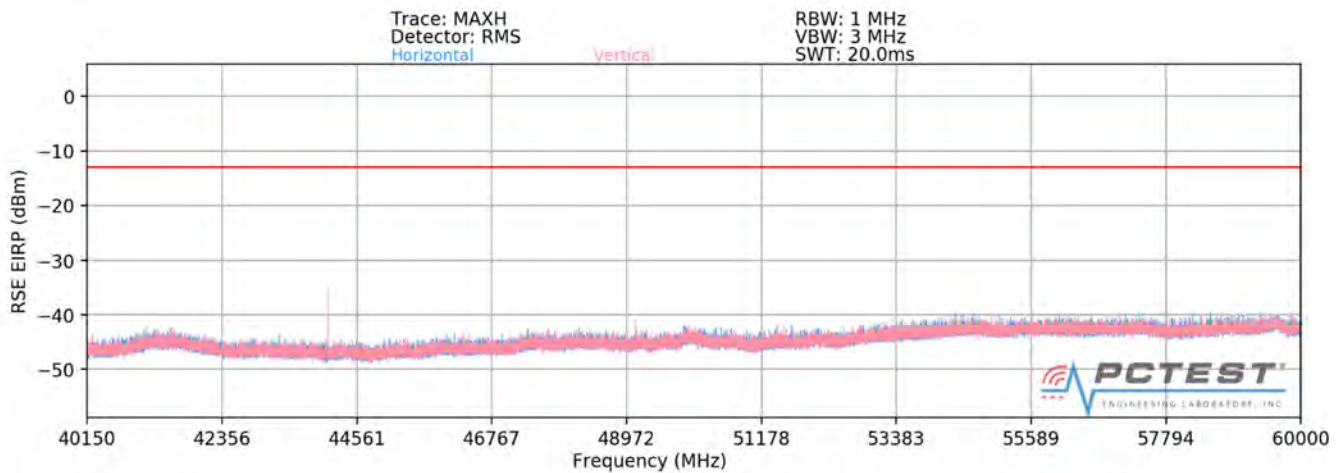

**Plot 7-192. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 185 of 286	

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
44082.98	Low	50	H	QPSK	H	171	150	-36.95	-13.00	-23.95
44083.18	Low	50	V	QPSK	H	138	152	-31.52	-13.00	-18.52
44083.16	Mid	50	H	QPSK	H	170	150	-38.48	-13.00	-25.48
44083.16	Mid	50	V	QPSK	H	139	151	-31.50	-13.00	-18.50
44083.14	High	50	H	QPSK	H	170	150	-36.49	-13.00	-23.49
44083.11	High	50	V	QPSK	H	137	152	-33.17	-13.00	-20.17

**Table 7-131. Ant3 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-30.42	-13.00	-17.42
Mid	50	QPSK	-30.71	-13.00	-17.71
High	50	QPSK	-31.51	-13.00	-18.51

**Table 7-132. Ant3 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)**

### Notes


1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$


FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 186 of 286	



**60GHz - 90GHz**

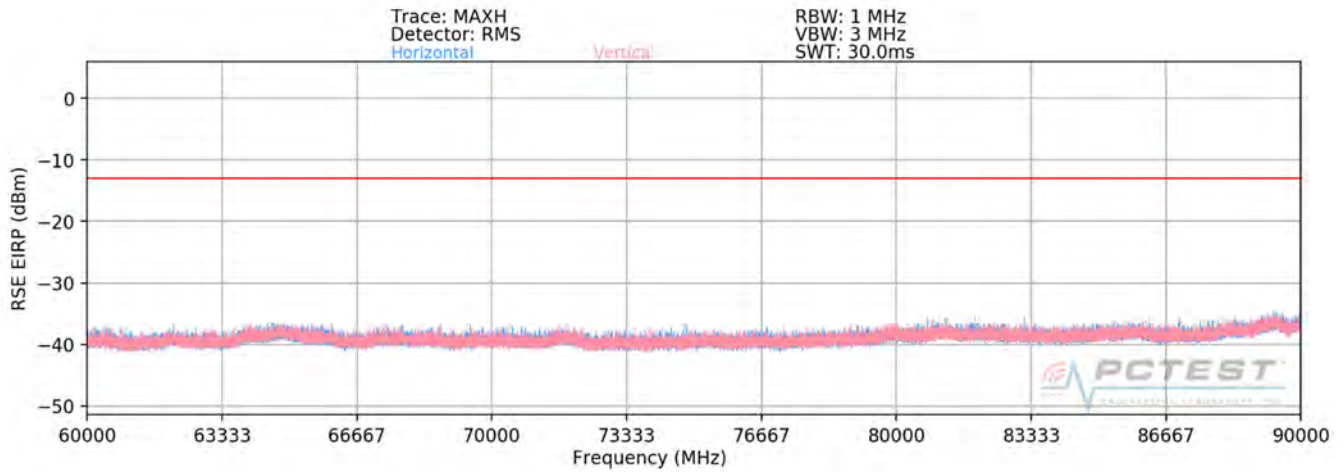

**Plot 7-193. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

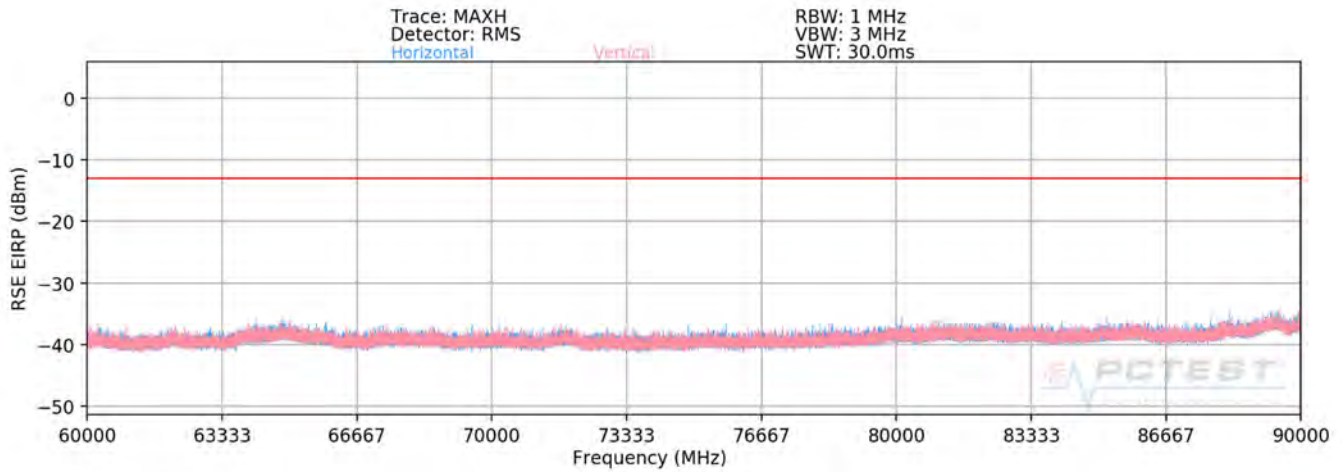

**Plot 7-194. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 187 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
740010.06	Low	50	H	QPSK	H	65	327	-49.62	-13.00	-36.62
74009.61	Low	50	V	QPSK	H	98	336	-53.01	-13.00	-40.01
76950.12	Mid	50	H	QPSK	H	72	346	-51.88	-13.00	-38.88
76950.12	Mid	50	V	QPSK	H	101	335	-51.67	-13.00	-38.67
79894.31	High	50	H	QPSK	H	-	-	-53.88	-13.00	-40.88
79929.15	High	50	V	QPSK	H	-	-	-53.81	-13.00	-40.81

**Table 7-133. Ant1 - SISO -Spurious Emissions Table (60GHz - 90GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-47.98	-13.00	-34.98
Mid	50	QPSK	-48.76	-13.00	-35.76
High	50	QPSK	-50.83	-13.00	-37.83

**Table 7-134. Ant1 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 188 of 286	

**90GHz - 140GHz**

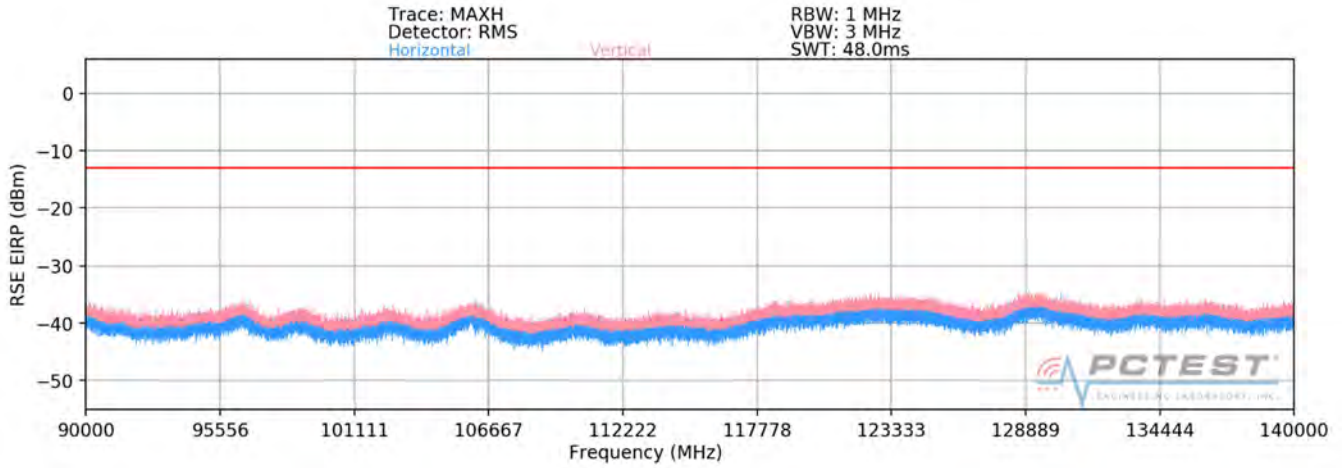

**Plot 7-195. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

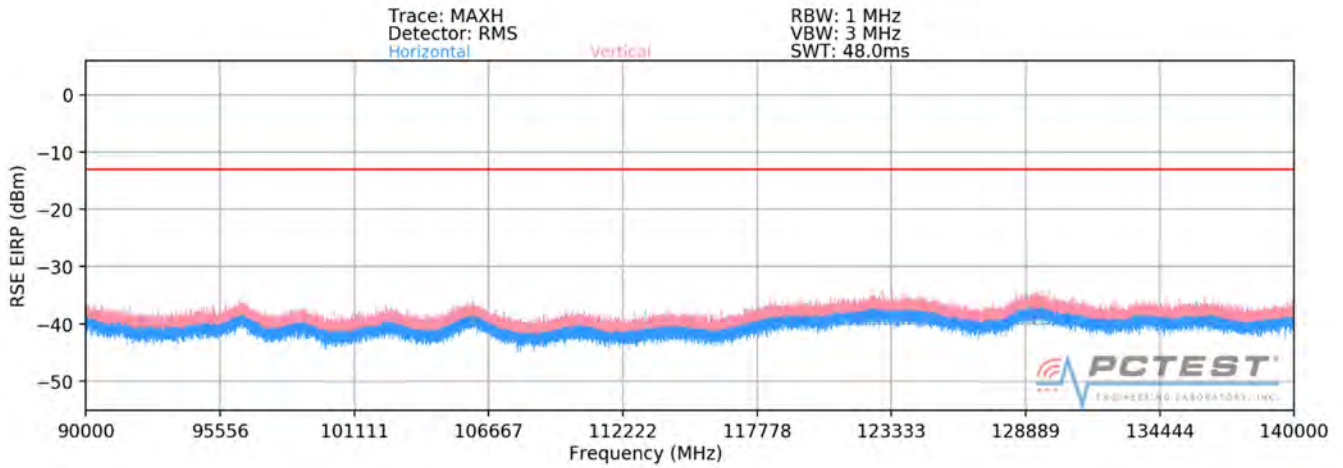

**Plot 7-196. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 189 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111083.52	Low	50	H	QPSK	H	11	348	-45.43	-13.00	-32.43
111083.67	Low	50	V	QPSK	V	326	5	-48.57	-13.00	-35.57
115493.82	Mid	50	H	QPSK	H	6	349	-46.66	-13.00	-33.66
115468.23	Mid	50	V	QPSK	V	17	290	-45.67	-13.00	-32.67
119900.88	High	50	H	QPSK	H	343	33	-47.94	-13.00	-34.94
119896.35	High	50	V	QPSK	V	300	27	-48.02	-13.00	-35.02

**Table 7-135. Ant3 - SISO -Spurious Emissions Table (90GHz - 140GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-43.71	-13.00	-30.71
Mid	50	QPSK	-43.13	-13.00	-30.13
High	50	QPSK	-44.97	-13.00	-31.97

**Table 7-136. Ant3 - MIMO -Spurious Emissions Table (90GHz - 140GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 190 of 286	

**140GHz - 170GHz**

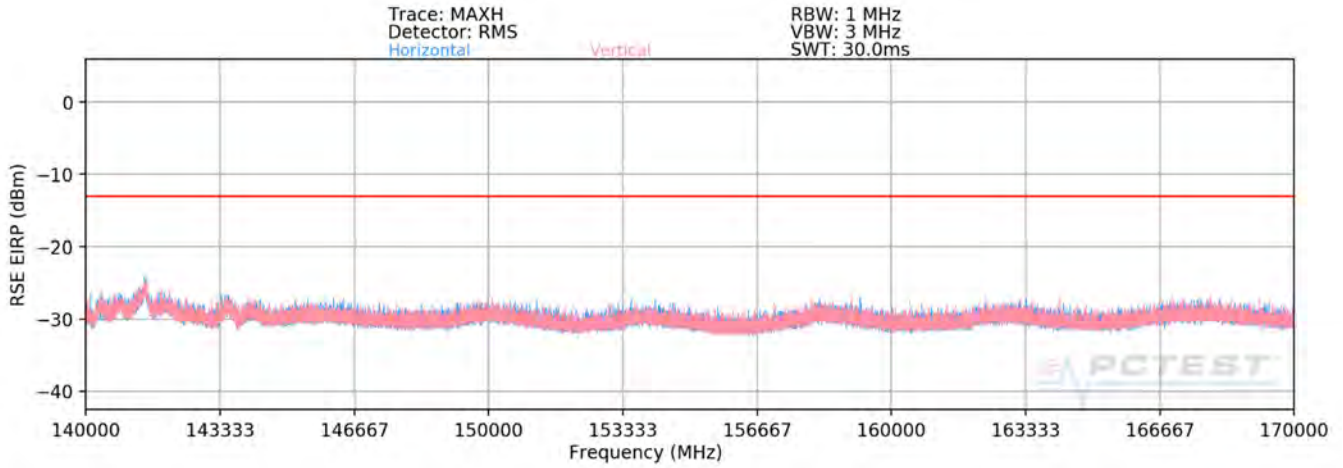

**Plot 7-197. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

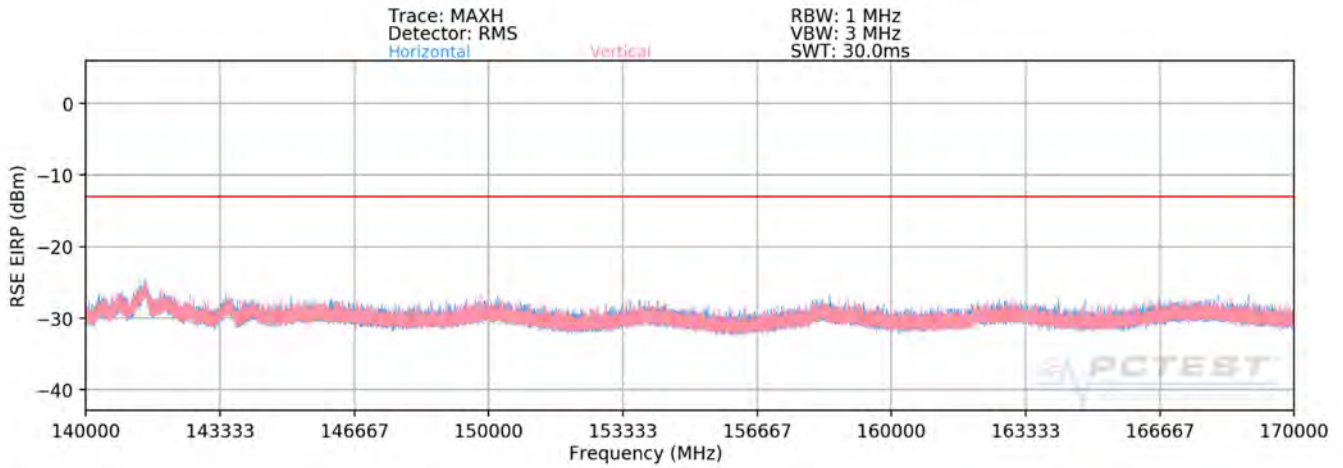

**Plot 7-198. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 191 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
141444.50	Low	50	H	QPSK	H	-	-	-32.47	-13.00	-19.47
141476.50	Low	50	V	QPSK	V	-	-	-32.26	-13.00	-19.26
141457.00	Mid	50	H	QPSK	H	-	-	-33.13	-13.00	-20.13
141492.00	Mid	50	V	QPSK	V	-	-	-32.68	-13.00	-19.68
141475.50	High	50	H	QPSK	H	-	-	-32.54	-13.00	-19.54
141486.50	High	50	V	QPSK	V	-	-	-32.18	-13.00	-19.18

**Table 7-137. Ant3 - SISO -Spurious Emissions Table (140GHz - 170GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-29.35	-13.00	-16.35
Mid	50	QPSK	-29.89	-13.00	-16.89
High	50	QPSK	-29.35	-13.00	-16.35

**Table 7-138. Ant3 - MIMO -Spurious Emissions Table (140GHz - 170GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 192 of 286	

**170GHz - 200GHz**

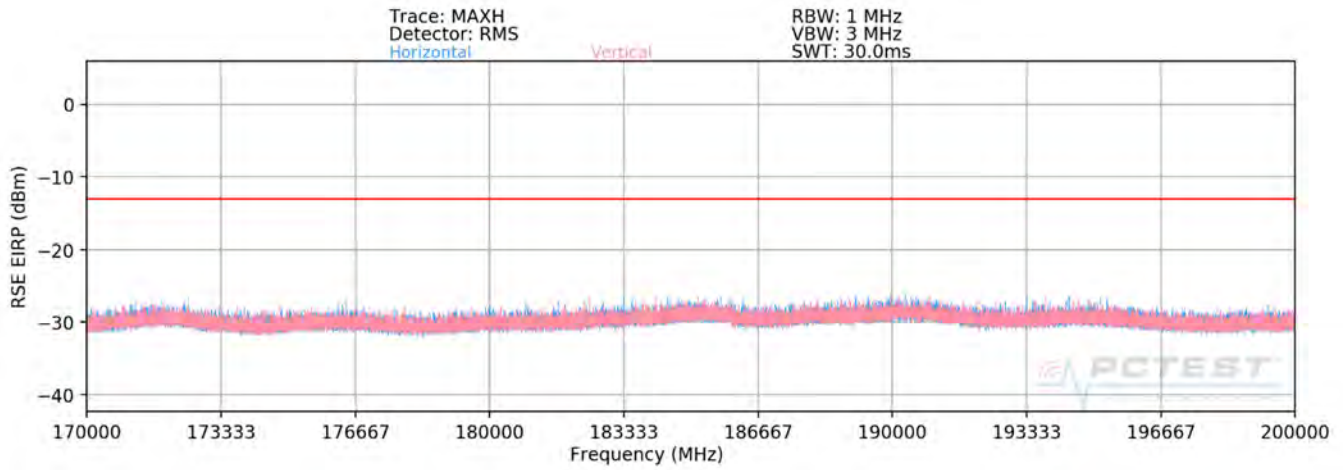

**Plot 7-199. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

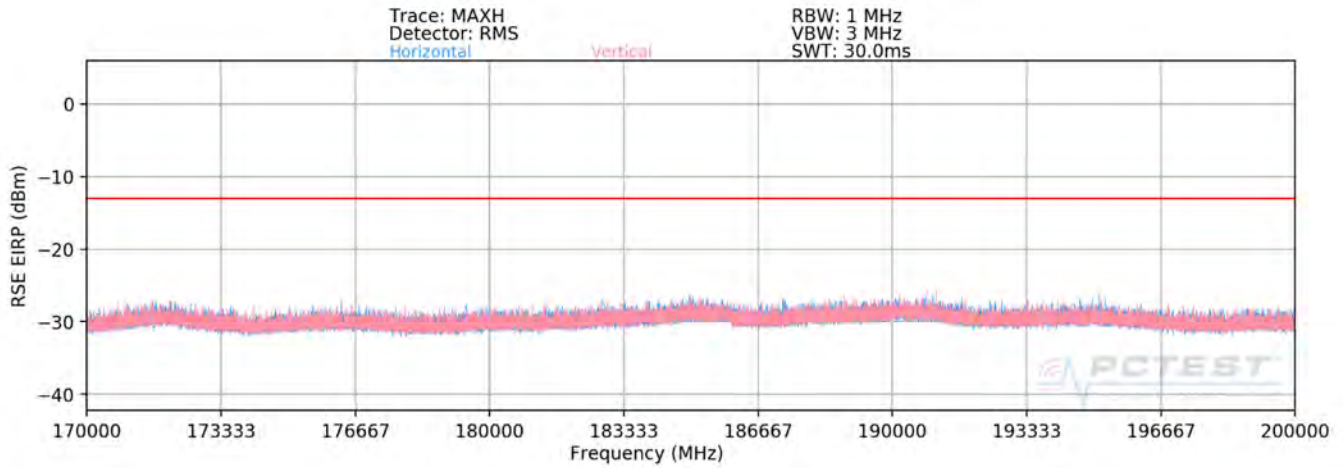

**Plot 7-200. Ant3-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 193 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
191024.00	Low	50	H	QPSK	H	-	-	-34.81	-13.00	-21.81
171951.00	Low	50	V	QPSK	V	-	-	-35.27	-13.00	-22.27
171993.00	Mid	50	H	QPSK	H	-	-	-35.08	-13.00	-22.08
189915.50	Mid	50	V	QPSK	V	-	-	-34.93	-13.00	-21.93
172027.50	High	50	H	QPSK	H	-	-	-35.04	-13.00	-22.04
171910.50	High	50	V	QPSK	V	-	-	-35.19	-13.00	-22.19

**Table 7-139. Ant3 - SISO -Spurious Emissions Table (170GHz - 200GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.02	-13.00	-19.02
Mid	50	QPSK	-31.99	-13.00	-18.99
High	50	QPSK	-32.10	-13.00	-19.10

**Table 7-140. Ant3 - MIMO -Spurious Emissions Table (170GHz - 200GHz)**

### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 194 of 286	




**Band n260- Ant4**

**30MHz - 1GHz**

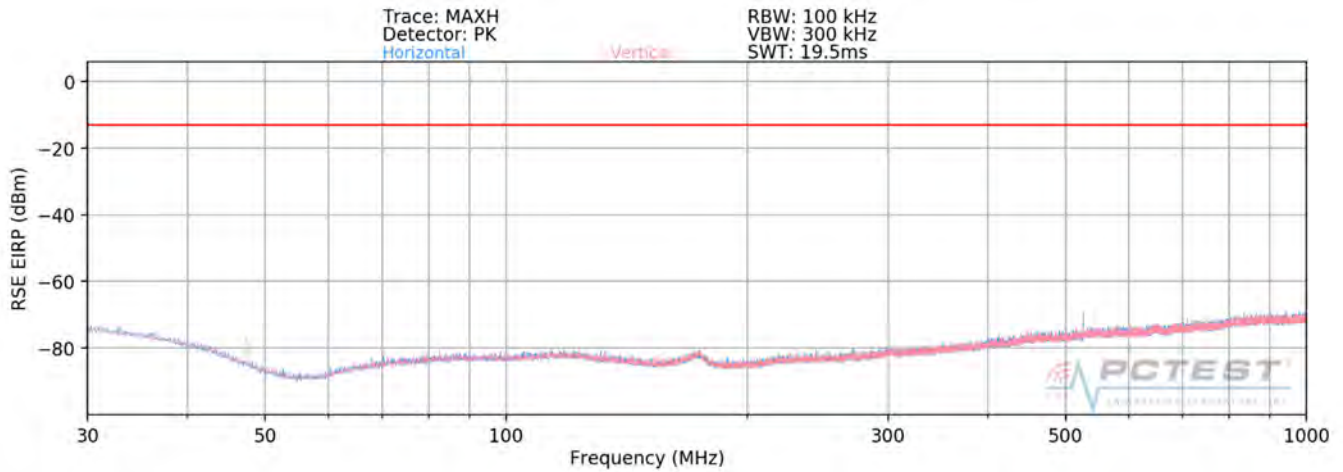


**Plot 7-201. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam)**

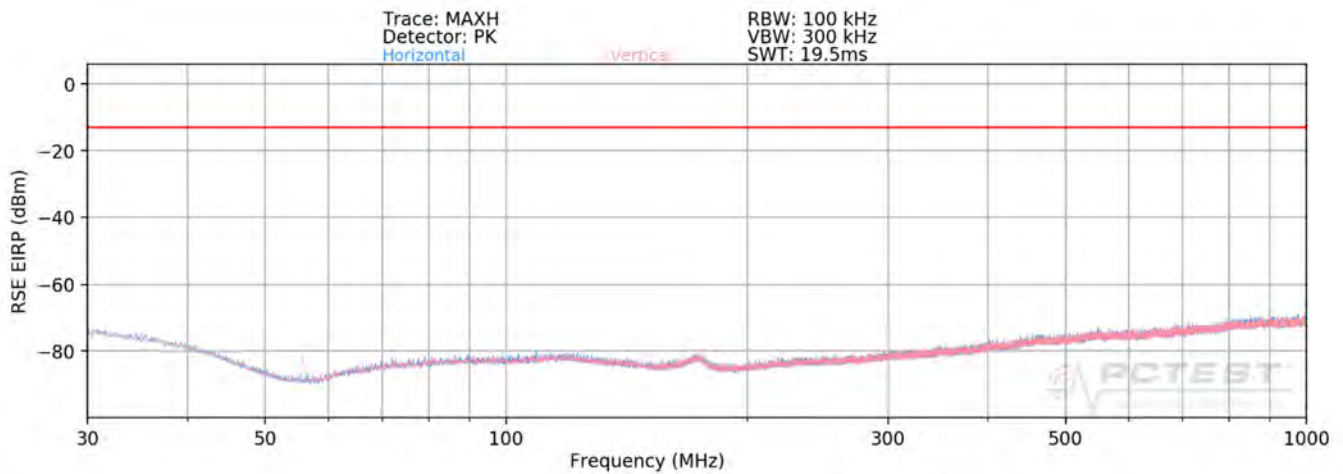


**Plot 7-202. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 195 of 286

**1GHz - 18GHz**

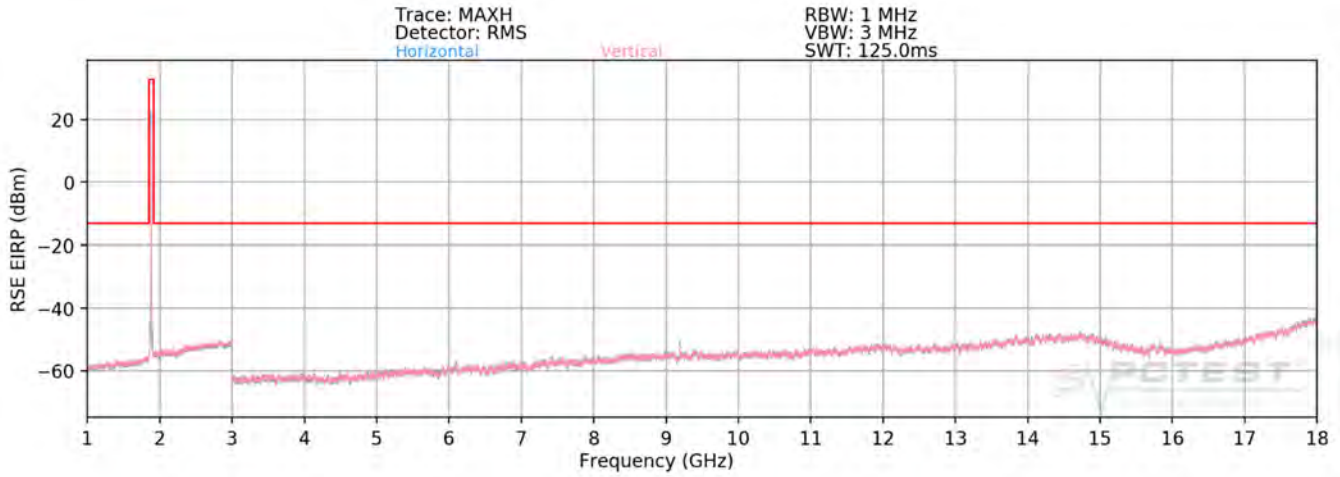

**Plot 7-203. Ant4-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel H Beam – ENDC)**

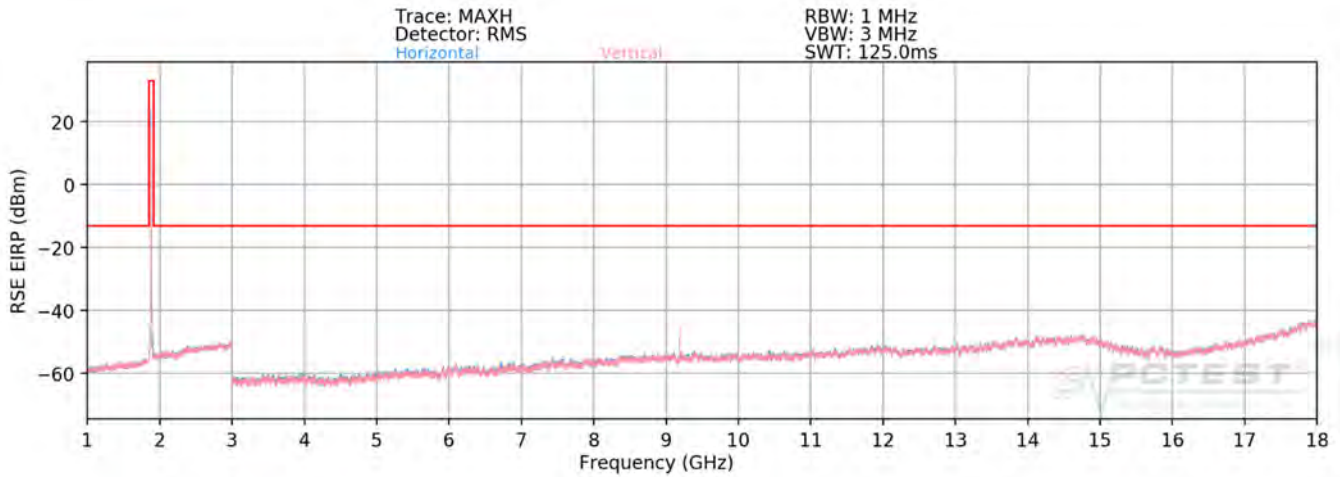

**Plot 7-204. Ant4-n260 Radiated Spurious Plot 1GHz - 18GHz (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 196 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
8407.15	Low	50	H	QPSK	H	240	61	-50.39	-13.00	-37.39
8407.15	Low	50	V	QPSK	V	185	334	-44.11	-13.00	-31.11
9109.17	Mid	50	H	QPSK	H	203	55	-50.56	-13.00	-37.56
9109.17	Mid	50	V	QPSK	V	142	4	-41.76	-13.00	-28.76
9144.46	High	50	H	QPSK	H	154	62	-52.27	-13.00	-39.27
9144.46	High	50	V	QPSK	V	140	358	-43.25	-13.00	-30.25

**Table 7-141. Ant4 - SISO -Spurious Emissions Table (1GHz - 18GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-43.19	-13.00	-30.19
Mid	50	QPSK	-41.39	-13.00	-28.39
High	50	QPSK	-42.74	-13.00	-29.74

**Table 7-142. Ant4 - MIMO -Spurious Emissions Table (1GHz - 18GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 197 of 286	

18GHz – 36.85GHz

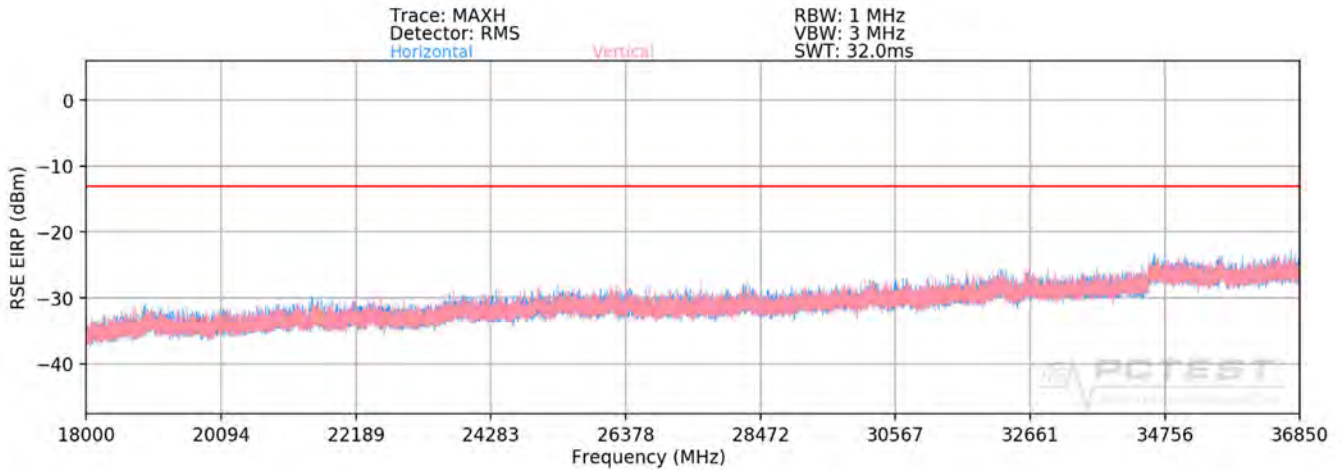

Plot 7-205. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)

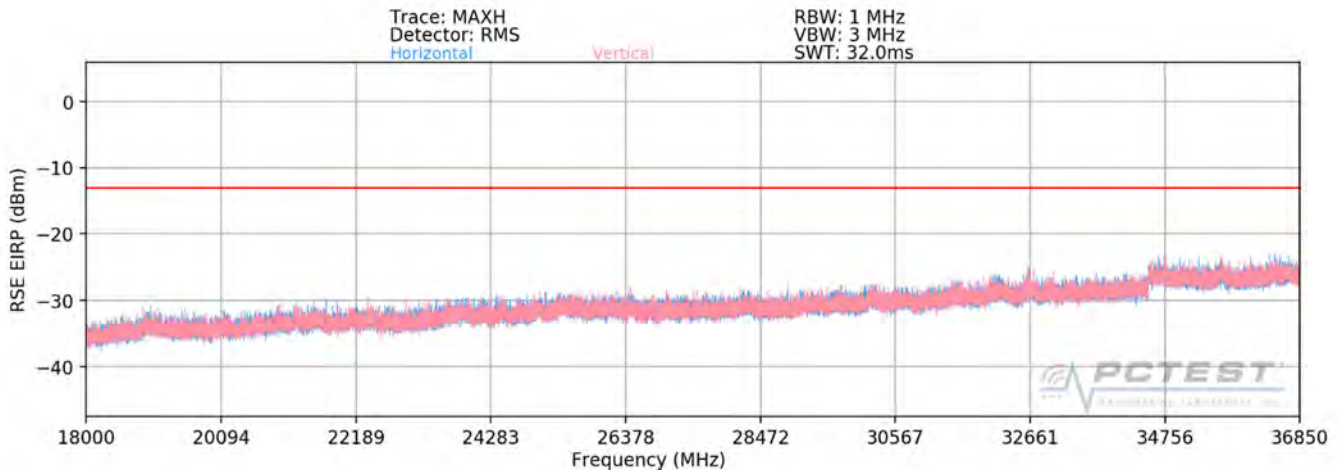

Plot 7-206. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 198 of 286	

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

$$\text{RSE EIRP (dBm)} = \text{Analyzer Level (dBm)} + 107 + \text{AFCL (dB/m)} + 20\text{Log(Dm)} - 104.8$$

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
36493.50	Low	50	H	QPSK	H	-	-	-31.11	-13.00	-18.11
36701.15	Low	50	V	QPSK	V	-	-	-31.13	-13.00	-18.13
36992.50	Mid	50	H	QPSK	H	-	-	-31.46	-13.00	-18.46
36468.50	Mid	50	V	QPSK	V	-	-	-31.61	-13.00	-18.61
36715.50	High	50	H	QPSK	H	-	-	-30.04	-13.00	-17.04
36459.50	High	50	V	QPSK	V	-	-	-30.70	-13.00	-17.70

**Table 7-143. Ant4 - SISO -Spurious Emissions Table (18GHz – 36.85GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-28.11	-13.00	-15.11
Mid	50	QPSK	-28.52	-13.00	-15.52
High	50	QPSK	-27.35	-13.00	-14.35

**Table 7-144. Ant4 - MIMO -Spurious Emissions Table (18GHz – 36.85GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 199 of 286

### 40.15GHz - 60GHz

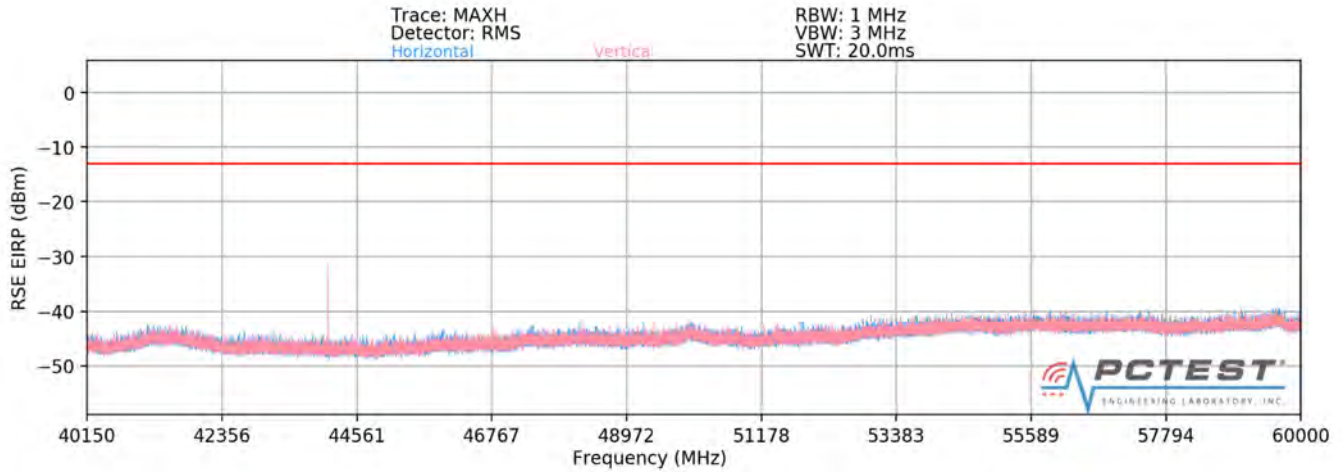

**Plot 7-207. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

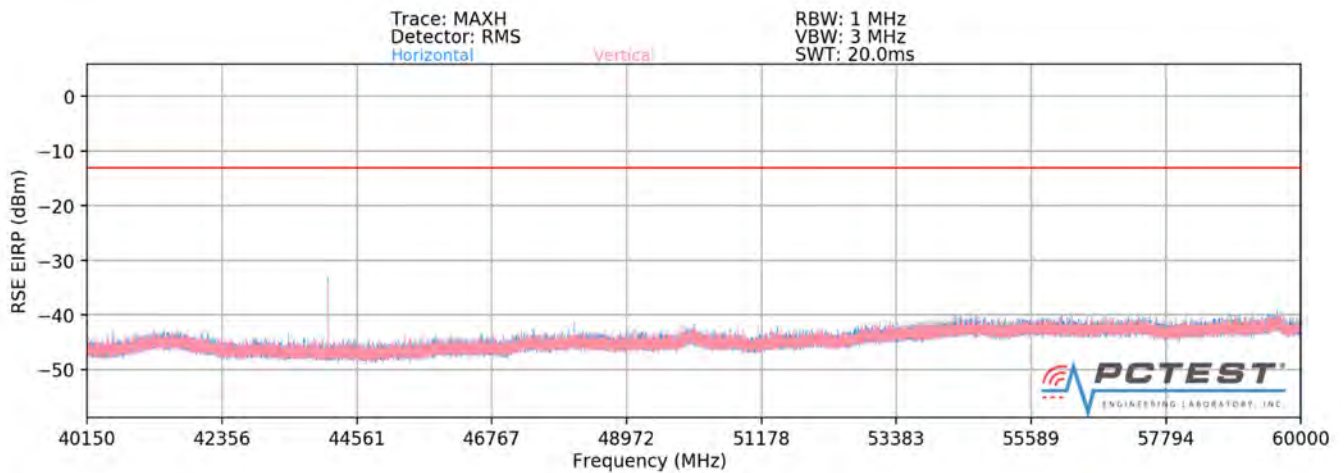

**Plot 7-208. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 200 of 286	

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1.5 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Antenna Height [cm]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
44083.15	Low	50	H	QPSK	H	321	152	-31.06	-13.00	-18.06
44082.98	Low	50	V	QPSK	V	345	150	-33.62	-13.00	-20.62
44083.16	Mid	50	H	QPSK	H	316	155	-32.56	-13.00	-19.56
44083.15	Mid	50	V	QPSK	V	346	150	-34.47	-13.00	-21.47
44083.11	High	50	H	QPSK	H	320	150	-30.65	-13.00	-17.65
44083.16	High	50	V	QPSK	V	346	150	-31.55	-13.00	-18.55

**Table 7-145. Ant4 - SISO -Spurious Emissions Table (40.15GHz - 60GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-29.14	-13.00	-16.14
Mid	50	QPSK	-30.40	-13.00	-17.40
High	50	QPSK	-28.06	-13.00	-15.06

**Table 7-146. Ant4 - MIMO -Spurious Emissions Table (40.15GHz - 60GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 201 of 286	

**60GHz - 90GHz**

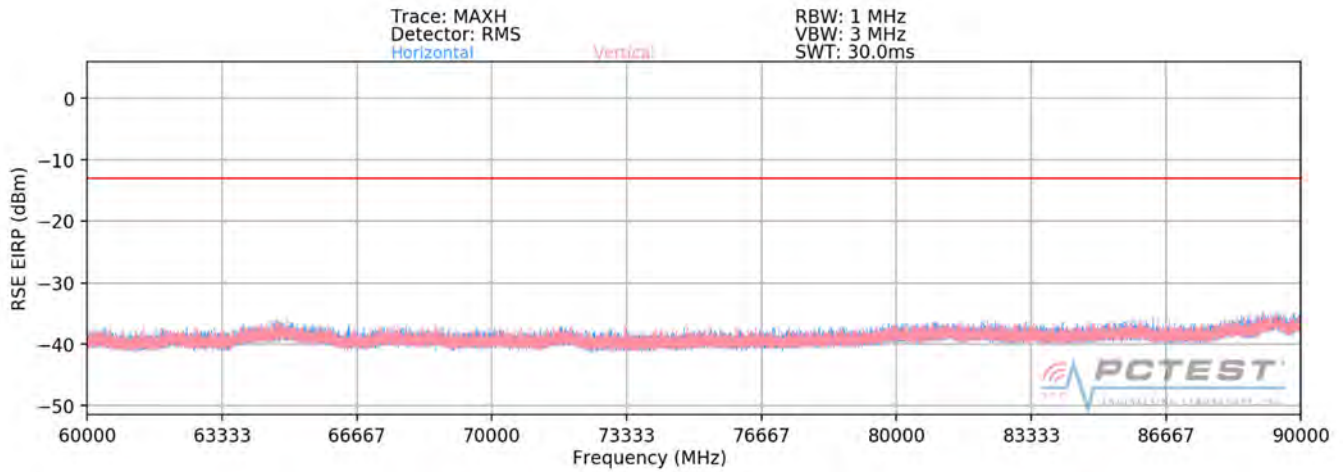

**Plot 7-209. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

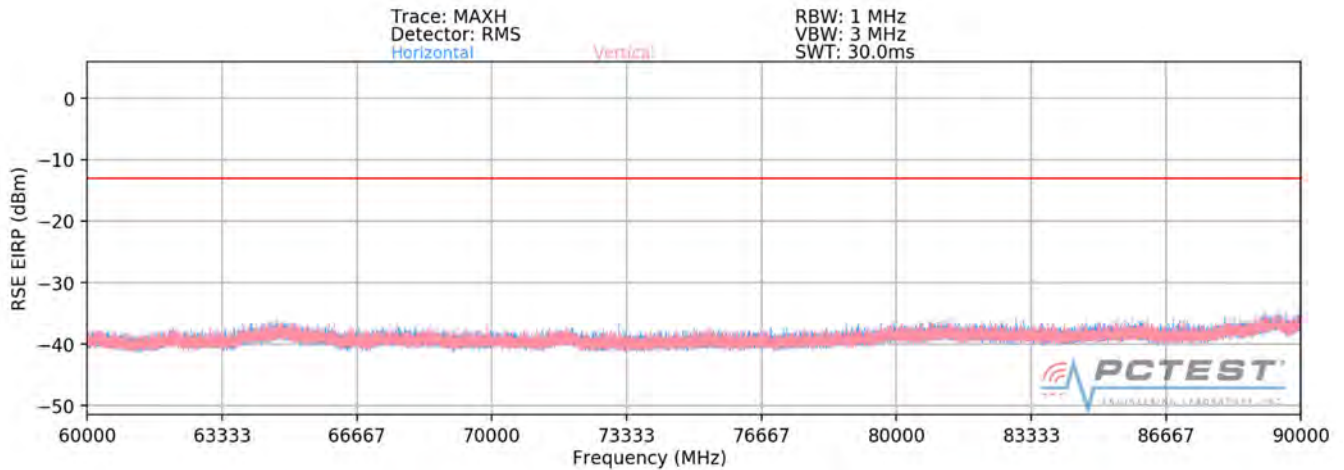

**Plot 7-210. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 202 of 286



## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
74043.72	Low	50	H	QPSK	H	-	-	-55.06	-13.00	-42.06
74055.84	Low	50	V	QPSK	V	142	293	-50.94	-13.00	-37.94
76995.63	Mid	50	H	QPSK	H	240	18	-49.98	-13.00	-36.98
76996.08	Mid	50	V	QPSK	V	195	111	-52.01	-13.00	-39.01
79936.68	High	50	H	QPSK	H	-	-	-53.86	-13.00	-40.86
79924.44	High	50	V	QPSK	V	-	-	-53.86	-13.00	-40.86

**Table 7-147. Ant4 - SISO -Spurious Emissions Table (60GHz - 90GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-49.52	-13.00	-36.52
Mid	50	QPSK	-47.86	-13.00	-34.86
High	50	QPSK	-50.85	-13.00	-37.85

**Table 7-148. Ant4 - MIMO -Spurious Emissions Table (60GHz - 90GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 203 of 286	

**90GHz - 140GHz**

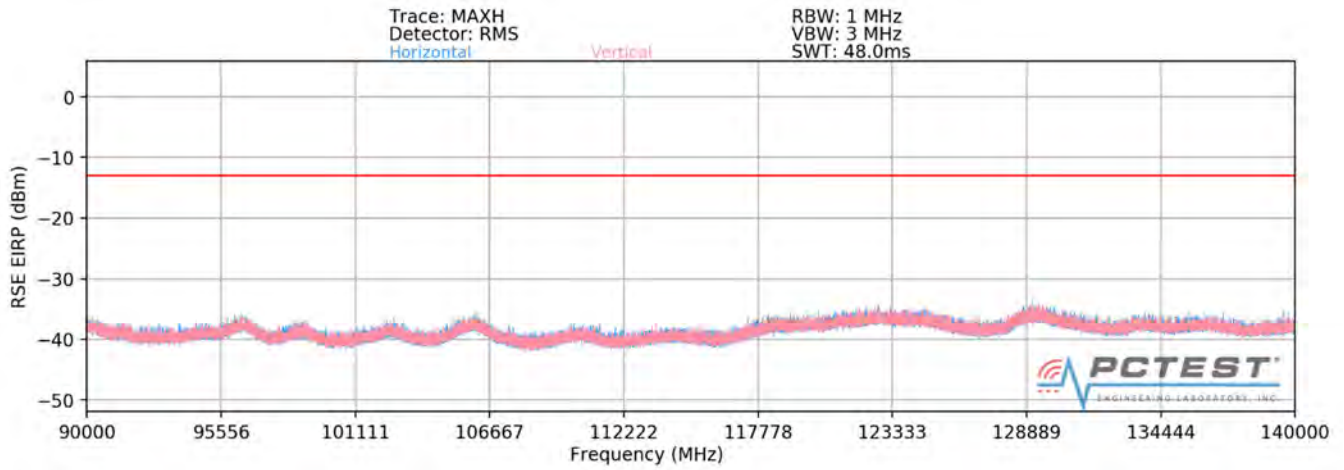

**Plot 7-211. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

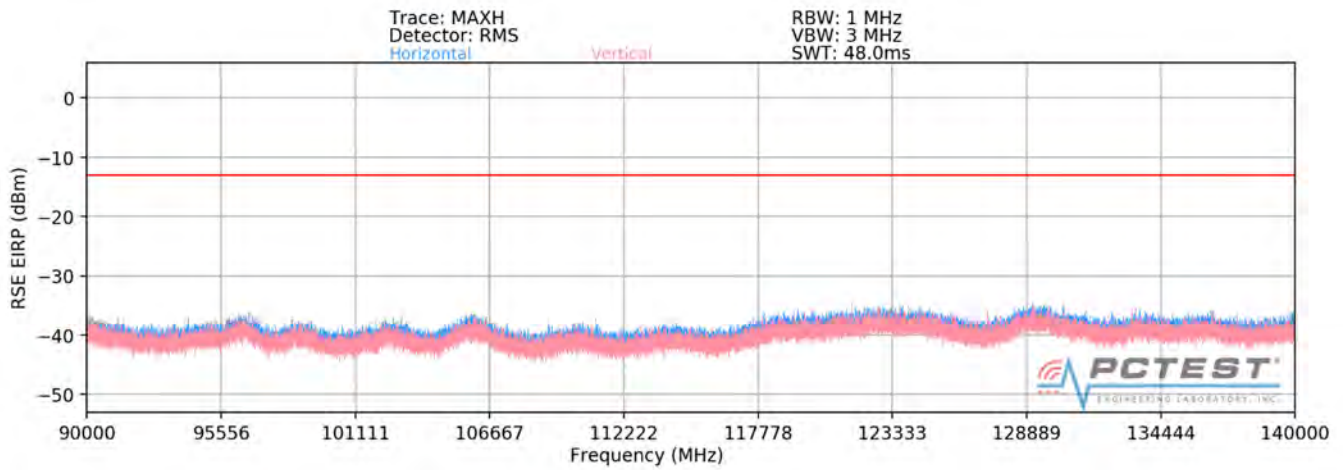

**Plot 7-212. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 204 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111084.06	Low	50	H	QPSK	H	275	8	-45.63	-13.00	-32.63
111084.03	Low	50	V	QPSK	V	132	237	-46.95	-13.00	-33.95
115494.33	Mid	50	H	QPSK	H	252	18	-47.58	-13.00	-34.58
115498.02	Mid	50	V	QPSK	V	-	-	-51.39	-13.00	-38.39
119895.27	High	50	H	QPSK	H	-	-	-49.15	-13.00	-36.15
119900.73	High	50	V	QPSK	V	198	131	-48.67	-13.00	-35.67

**Table 7-149. Ant4 - SISO -Spurious Emissions Table (90GHz - 140GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-43.23	-13.00	-30.23
Mid	50	QPSK	-46.07	-13.00	-33.07
High	50	QPSK	-45.89	-13.00	-32.89

**Table 7-150. Ant4 - MIMO -Spurious Emissions Table (90GHz - 140GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 205 of 286	

**140GHz - 170GHz**

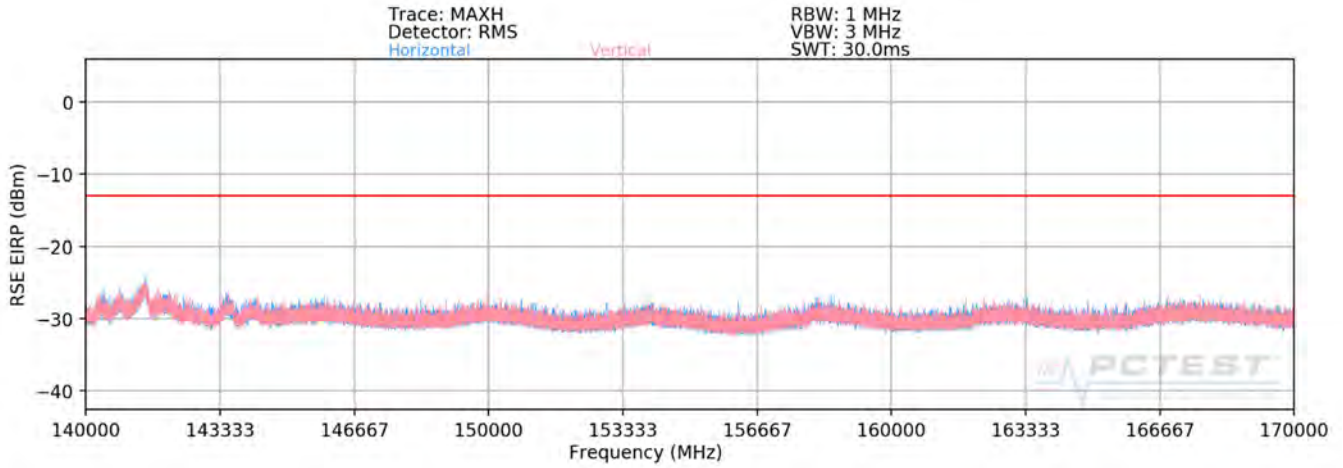

**Plot 7-213. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

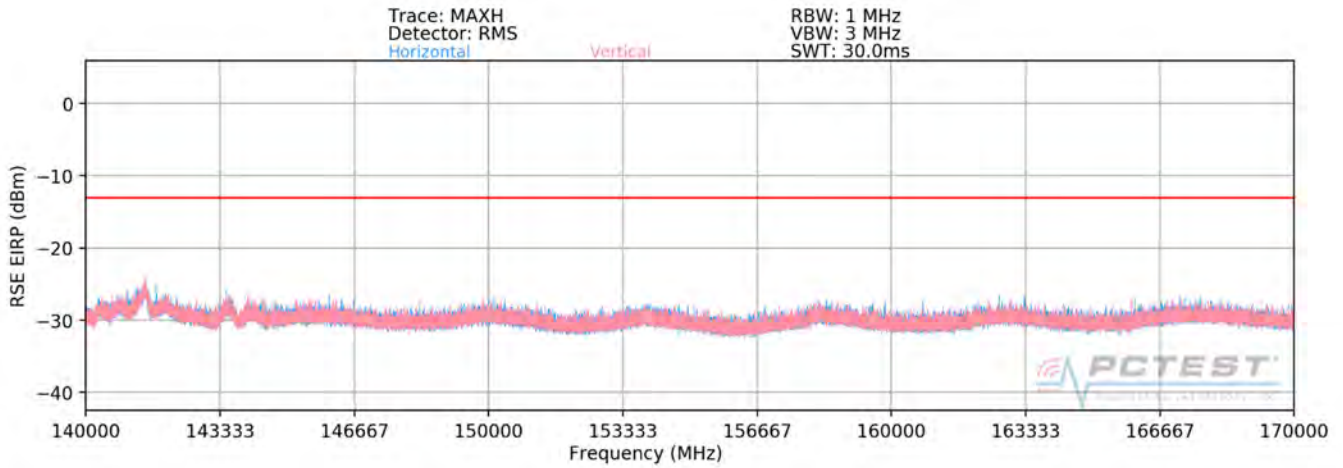

**Plot 7-214. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 206 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
141450.00	Low	50	H	QPSK	H	-	-	-32.57	-13.00	-19.57
141489.50	Low	50	V	QPSK	V	-	-	-32.50	-13.00	-19.50
141470.50	Mid	50	H	QPSK	H	-	-	-32.14	-13.00	-19.14
141436.50	Mid	50	V	QPSK	V	-	-	-32.52	-13.00	-19.52
141432.00	High	50	H	QPSK	H	-	-	-32.30	-13.00	-19.30
141483.50	High	50	V	QPSK	V	-	-	-32.31	-13.00	-19.31

**Table 7-151. Ant4 - SISO -Spurious Emissions Table (140GHz - 170GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-29.52	-13.00	-16.52
Mid	50	QPSK	-29.32	-13.00	-16.32
High	50	QPSK	-29.30	-13.00	-16.30

**Table 7-152. Ant4 - MIMO -Spurious Emissions Table (140GHz - 170GHz)**


### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:


$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 207 of 286	

**170GHz - 200GHz**

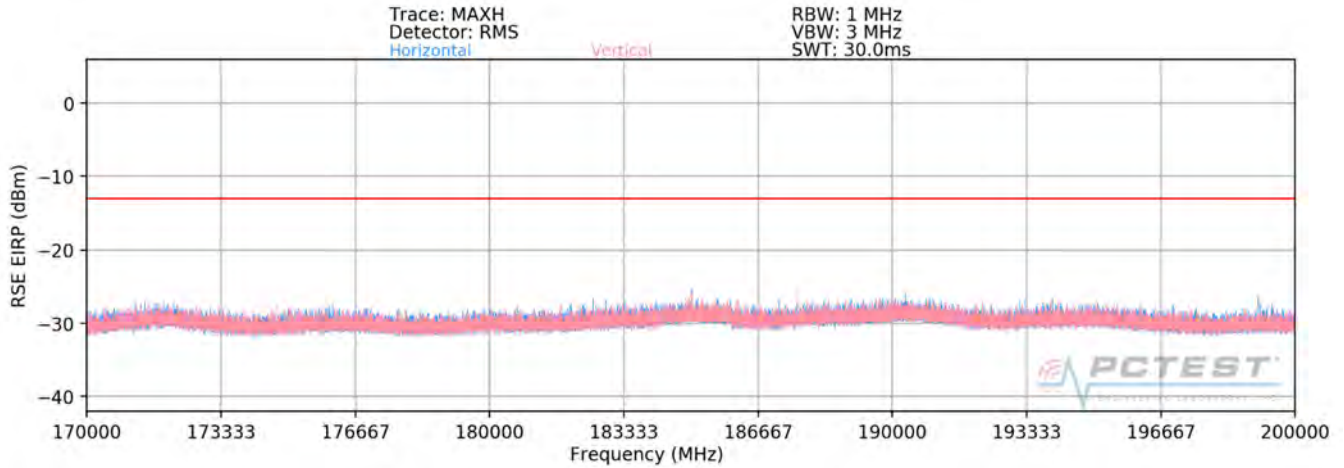

**Plot 7-215. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel H Beam – ENDC)**

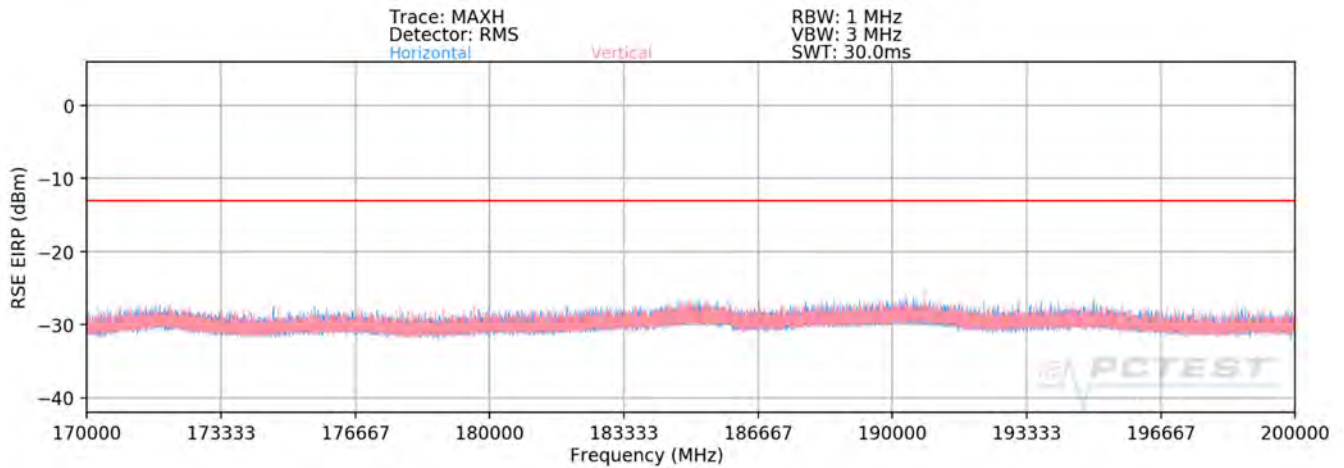

**Plot 7-216. Ant4-n260 Radiated Spurious Plot (1CC QPSK Mid Channel V Beam – ENDC)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 208 of 286

## Spurious Emissions EIRP Sample Calculation (n260)

The raw radiated spurious level is converted to field strength in dBuV/m. Then, the RSE EIRP level is calculated by applying the additional factors shown below for a test distance of 1 meter.

**RSE EIRP (dBm) = Analyzer Level (dBm) + 107 + AFCL (dB/m) + 20Log(Dm) – 104.8 + Harmonic Mixer Conversion Loss [dB]**

Frequency [MHz]	Channel	Bandwidth (MHz)	EUT Beam Pol.	Modulation	Antenna Polarization [H/V]	Turntable Azimuth [degrees]	Positioner Azimuth [degrees]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
191037.00	Low	50	H	QPSK	H	-	-	-35.09	-13.00	-22.09
172008.00	Low	50	V	QPSK	V	-	-	-35.05	-13.00	-22.05
172002.50	Mid	50	H	QPSK	H	-	-	-34.99	-13.00	-21.99
171998.00	Mid	50	V	QPSK	V	-	-	-35.05	-13.00	-22.05
171997.50	High	50	H	QPSK	H	-	-	-35.09	-13.00	-22.09
172016.50	High	50	V	QPSK	V	-	-	-34.96	-13.00	-21.96

**Table 7-153. Ant4 - SISO -Spurious Emissions Table (170GHz - 200GHz)**

Channel	Bandwidth (MHz)	Modulation	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
Low	50	QPSK	-32.06	-13.00	-19.06
Mid	50	QPSK	-32.01	-13.00	-19.01
High	50	QPSK	-32.01	-13.00	-19.01

**Table 7-154. Ant4 - MIMO -Spurious Emissions Table (170GHz - 200GHz)**

### Notes

1. The RSE EIRP level is taken directly from the spectrum analyzer which includes the appropriate antenna factors, cable losses, and harmonic mixer conversion losses. Measurements were performed at a distance of 1 meter.
2. To address compliance of MIMO RSE per KDB 662911 D01, the MIMO RSE EIRP is calculated by summing the worst case H Beam EIRP and V Beam EIRP in linear powers units then converted back to dBm:

$$\text{EIRP(H Beam)} + \text{EIRP(V Beam)} = \text{EIRP(MIMO)}$$

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 209 of 286	

## 7.5 Band Edge Emissions

### §2.1051, §30.203

#### Test Overview

All out of band emissions are measured in a radiated setup while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All modulations were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***The minimum permissible attenuation level of any spurious emission is -13dBm/1MHz. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be -5 dBm/MHz or lower.***

#### Test Procedure Used

ANSI C63.26-2015 Section 5 and ANSI C63.26-2015 Section 6.4  
KDB 842590 D01 v01 Section 4.4.2.5

#### Test Settings

1. Start and stop frequency were set such that both upper and lower band edges are measured.
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 1MHz
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning.
- 2) Band Edge measurements in this section are shown as equivalent conductive powers for direct comparison to the 30.203 limit. The conductive power at the band edge is calculated by subtracting the gain of the EUT's antenna from the measured EIRP level. Antenna Gain information is shown on the following page.
- 3) Band Edge emissions were measured at a 1 meter distance.
- 4) The spectrum analyzer for each measurement shows an offset value that was determined using the measurement antenna factor, cable loss, far field measurement distance, and EUT antenna gain. A sample calculation is shown on the following page.
- 5) The antenna gains applied to the measurements in the plots shown in this section are accurate for the displayed spectrum.
- 6) MIMO Band Edge plots shown below are mathematically summed conductive powers between spectrum analyzer measurements on H Beam and V Beam. This MIMO bandedge plot was produced by summing the following two spectrum analyzer traces: (1) the first trace is maximized while the EUT is transmitting in H-beam and (2) the second trace is maximized while the EUT is transmitting in V-beam.
- 7) The MIMO Band Edges were calculated by using the "measure and sum the spectra across the outputs" technique specified in Section 6.4.3.2.2 of ANSI C63.26-2015. The spectra were summed linearly and converted to dBm for comparison with the limit.

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 210 of 286	



### Antenna Gain Information at the Band Edge

The following antenna gain information is provided to demonstrate the antenna performance of the 27.5 – 28.35GHz and 37 – 40GHz band. These antenna gains were subtracted from the measured EIRP levels at the lower and upper band edge frequencies to determine an equivalent conductive power that was compared directly with the §30.203 limits.

Antenna	Channel	Beam Polarization	Gain (dBi)
Ant1	Low	H	9.28
		V	10.16
	High	H	8.70
		V	9.16
Ant2	Low	H	6.93
		V	5.62
	High	H	5.75
		V	5.29
Ant3	Low	H	8.73
		V	7.61
	High	H	8.24
		V	8.07
Ant4	Low	H	8.49
		V	7.81
	High	H	8.52
		V	8.01

**Table 7-155. Antenna Gains at the Band Edges(n261)**

Antenna	Channel	Beam Polarization	Gain (dBi)
Ant1	Low	H	10.81
		V	9.25
	High	H	10.19
		V	10.19
Ant2	Low	H	8.91
		V	7.95
	High	H	7.20
		V	7.61
Ant3	Low	H	9.77
		V	8.90
	High	H	10.01
		V	9.83
Ant4	Low	H	9.29
		V	9.58
	High	H	9.84
		V	10.55

**Table 7-156. Antenna Gains at the Band Edges(n260)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 211 of 286	

**Sample Analyzer Offset Calculation (at 27.5GHz)**

Measurement Antenna Factor = 40.70dB/m

Cable Loss = 8.82dB

EUT Antenna Gain = 6.60dBi


$$\begin{aligned} \text{Analyzer Offset (dB)} &= \text{AF (dB/m)} + \text{CL (dB)} + 107 + 20\log_{10}(D) - 104.8\text{dB} - \text{Gain (dBi)}, \text{ where } D = 1\text{m} \\ &= 40.70\text{dB/m} + 8.82\text{dB} + 107 + 20\log_{10}(1\text{m}) - 104.8\text{dB} - 6.60\text{dBi} \\ &= 45.12\text{dB} \end{aligned}$$

**Note:**


While it is allowed to use the antenna gain subtraction method in the band edge as it is defined in Part 30, the device meets the requirements via early exit condition as specified in KDB publication 842590 D01.

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	 <b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 212 of 286

**Band n261 - MIMO**

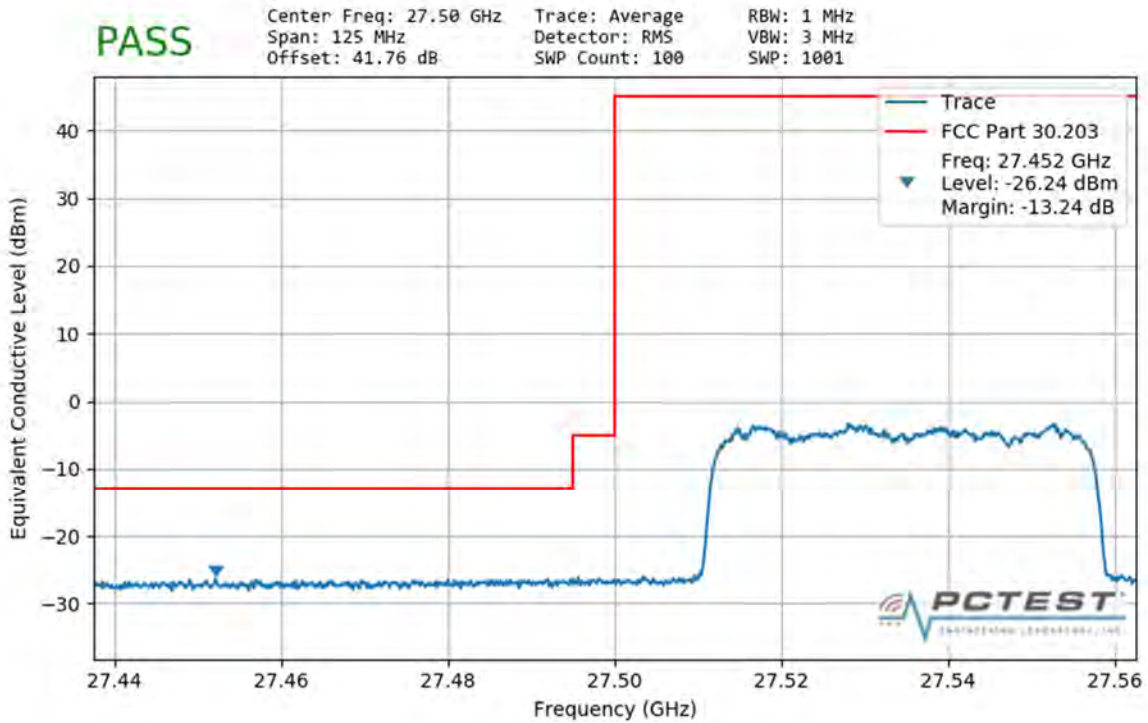


**Plot 7-217. Ant1 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

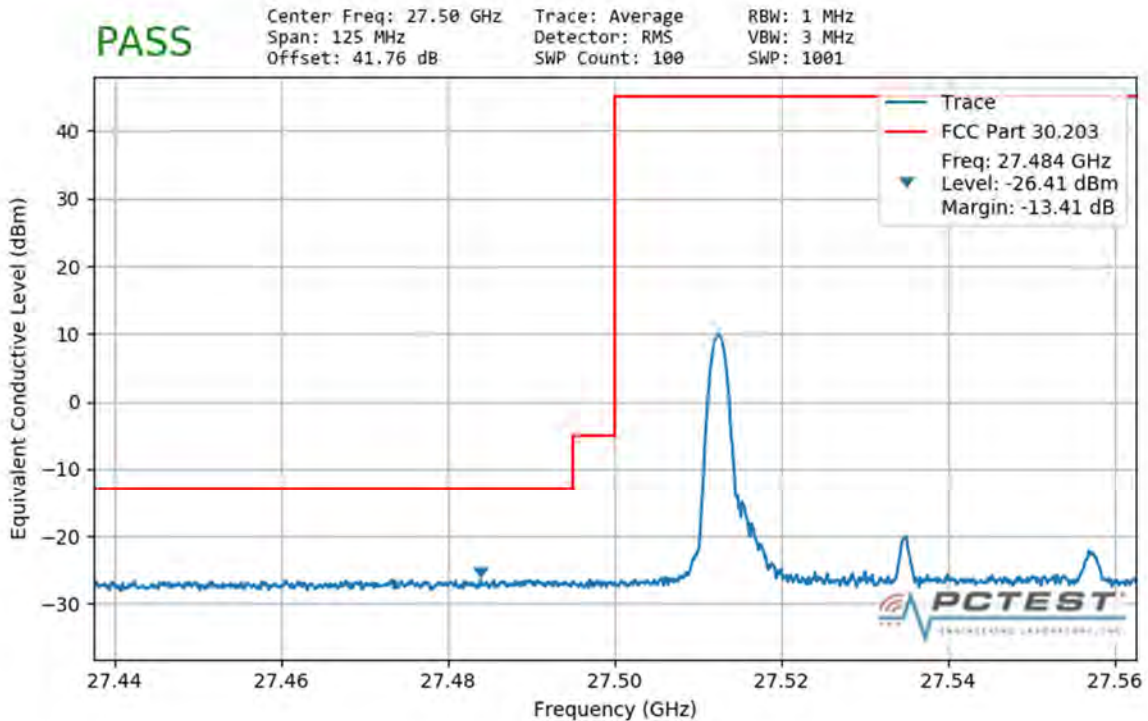


**Plot 7-218. Ant1 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 213 of 286

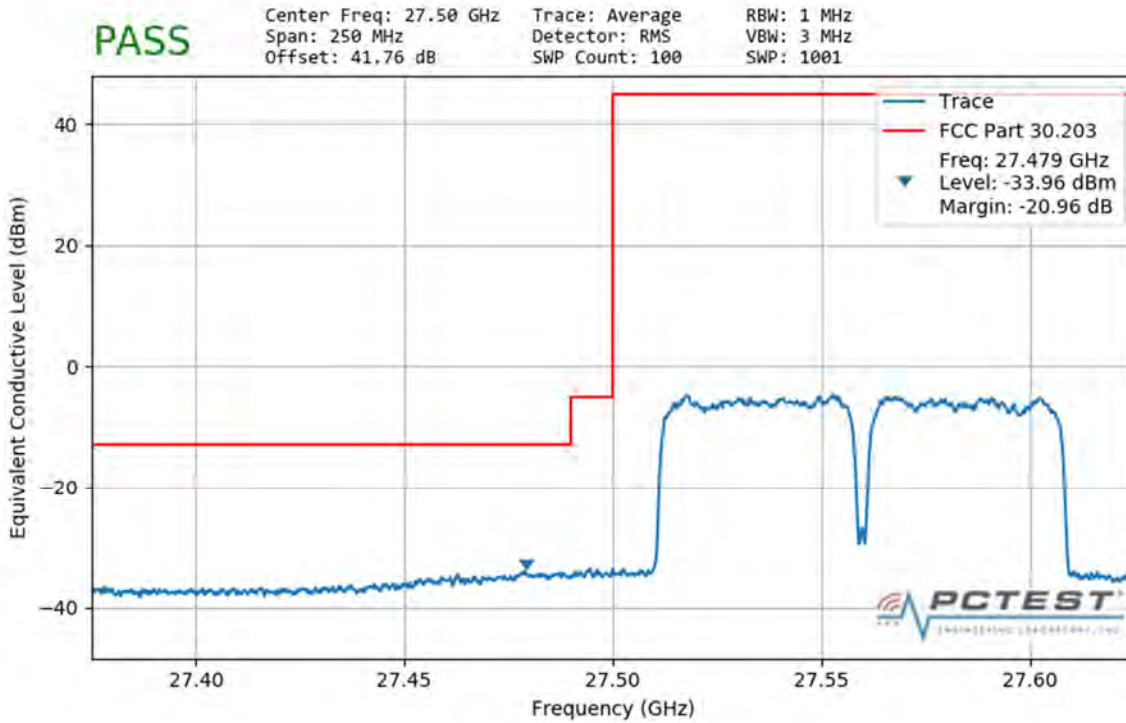


**Plot 7-219. Ant1 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

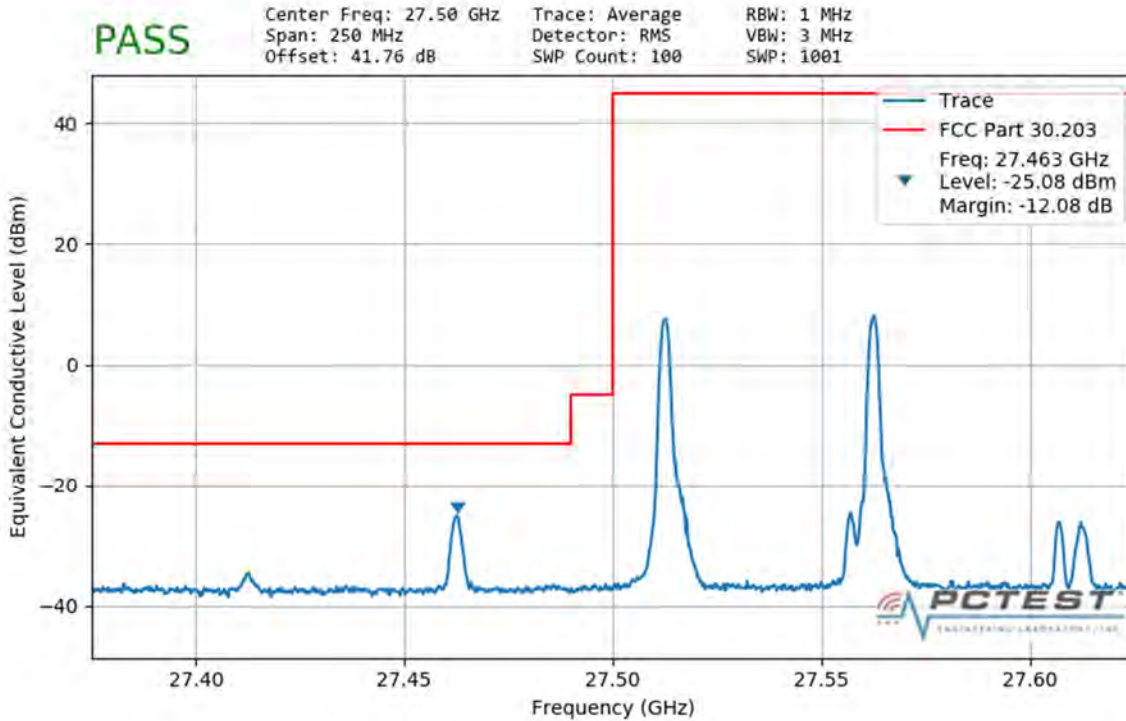


**Plot 7-220. Ant1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 214 of 286

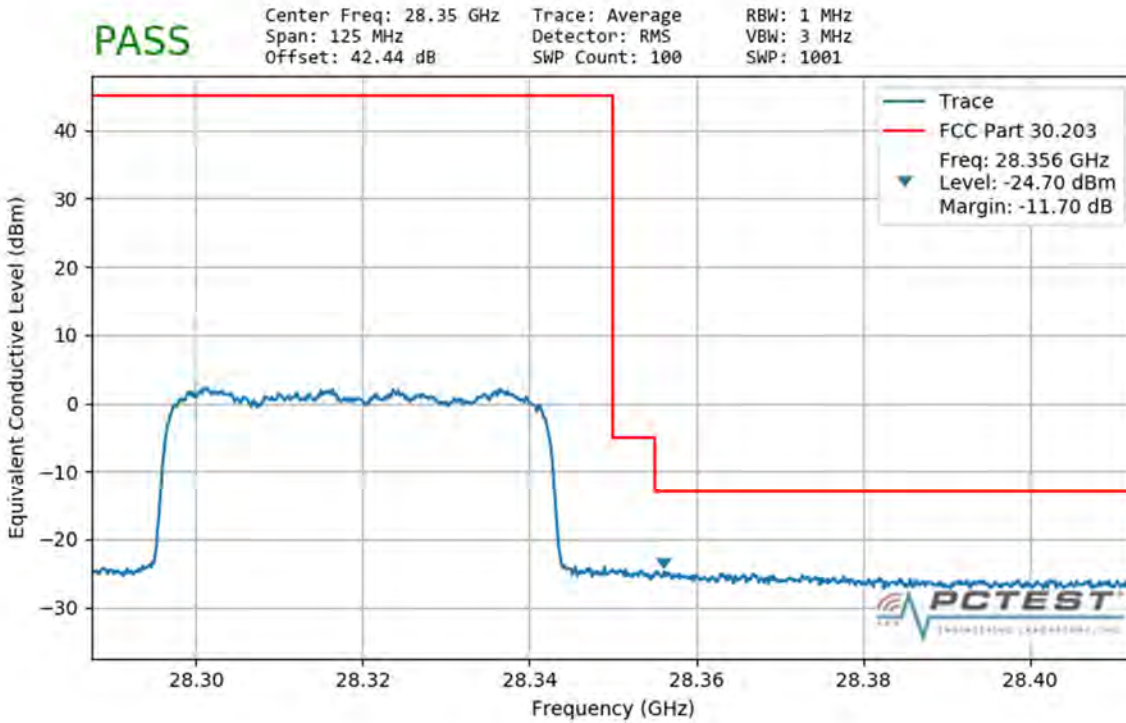


**Plot 7-221. Ant1 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

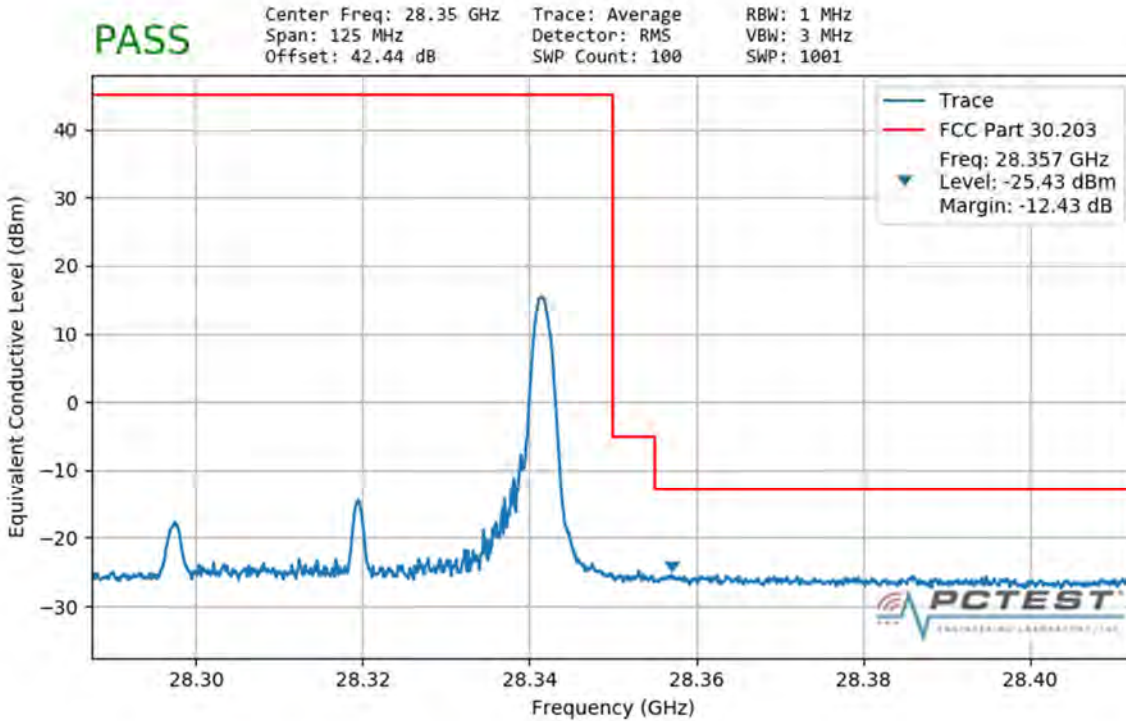


**Plot 7-222. Ant1 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 215 of 286

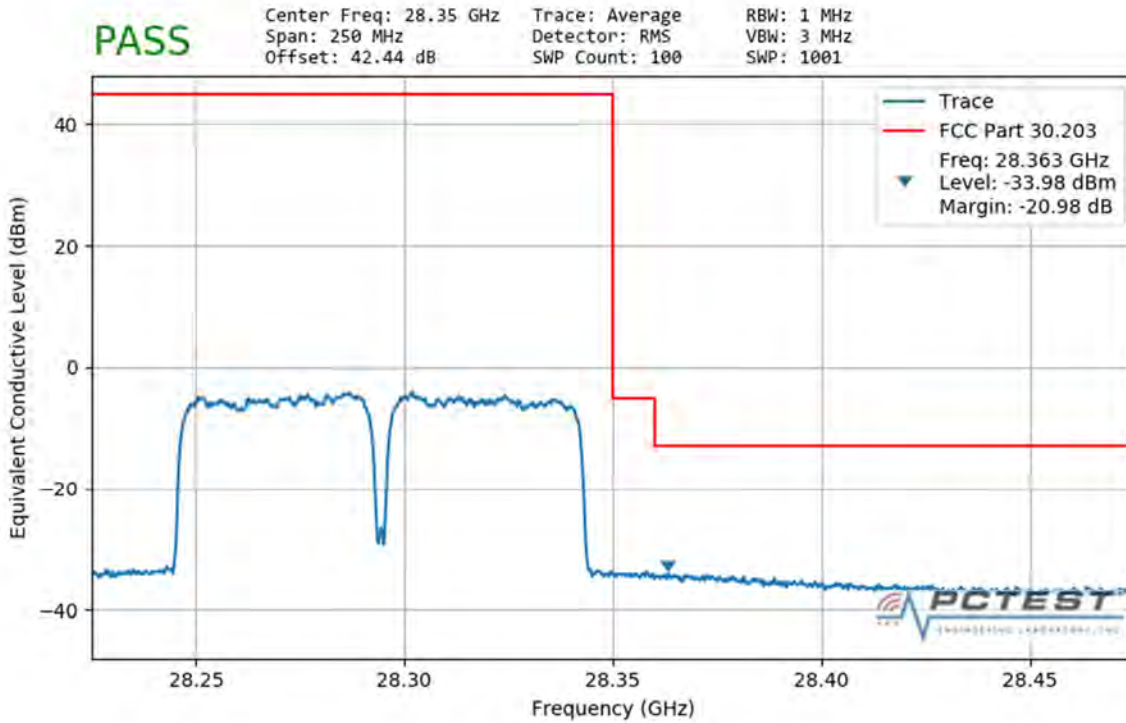


**Plot 7-223. Ant1 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

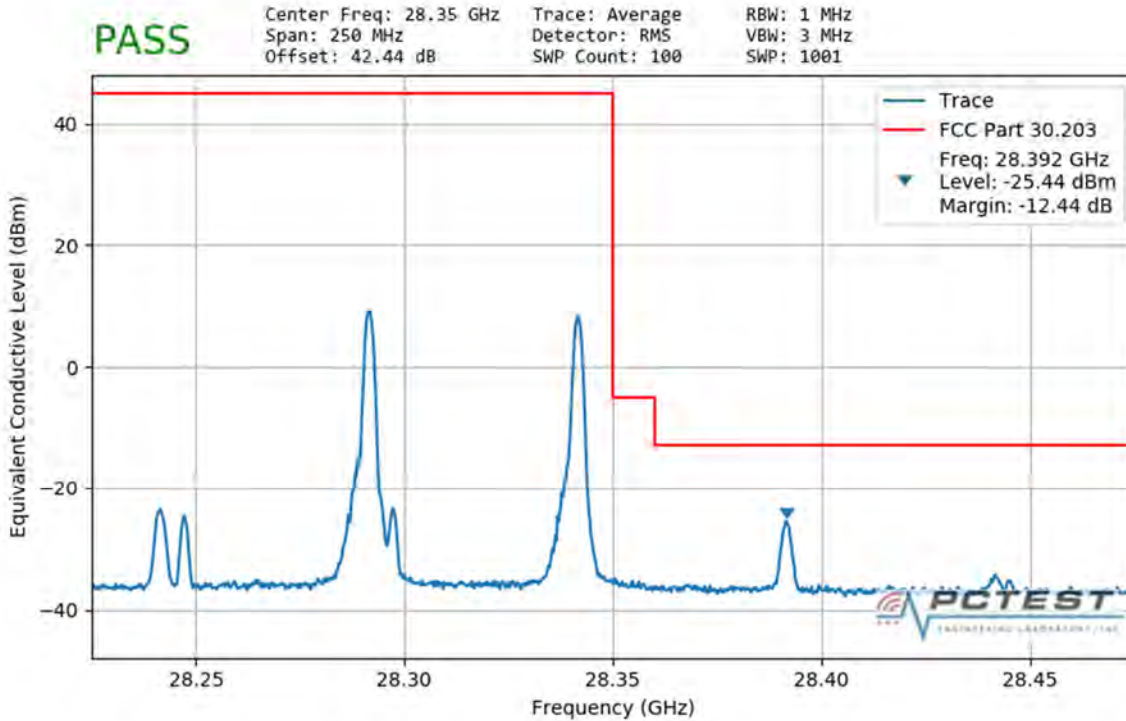


**Plot 7-224. Ant1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 216 of 286

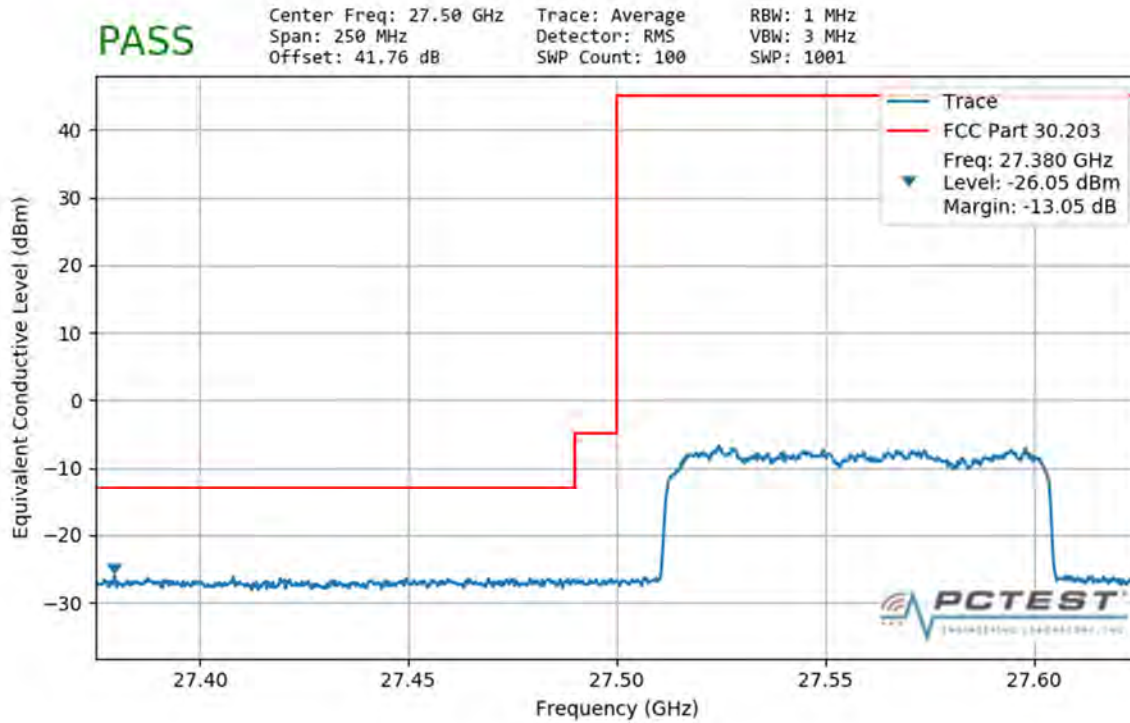


**Plot 7-225. Ant1 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

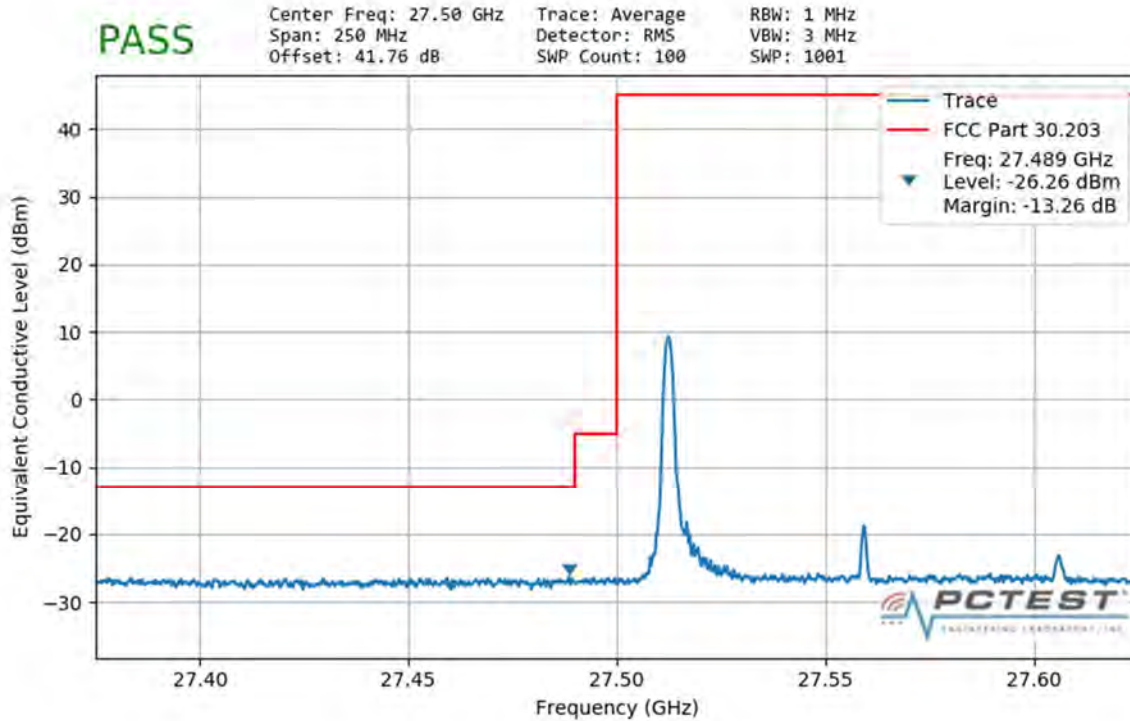


**Plot 7-226. Ant1 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 217 of 286

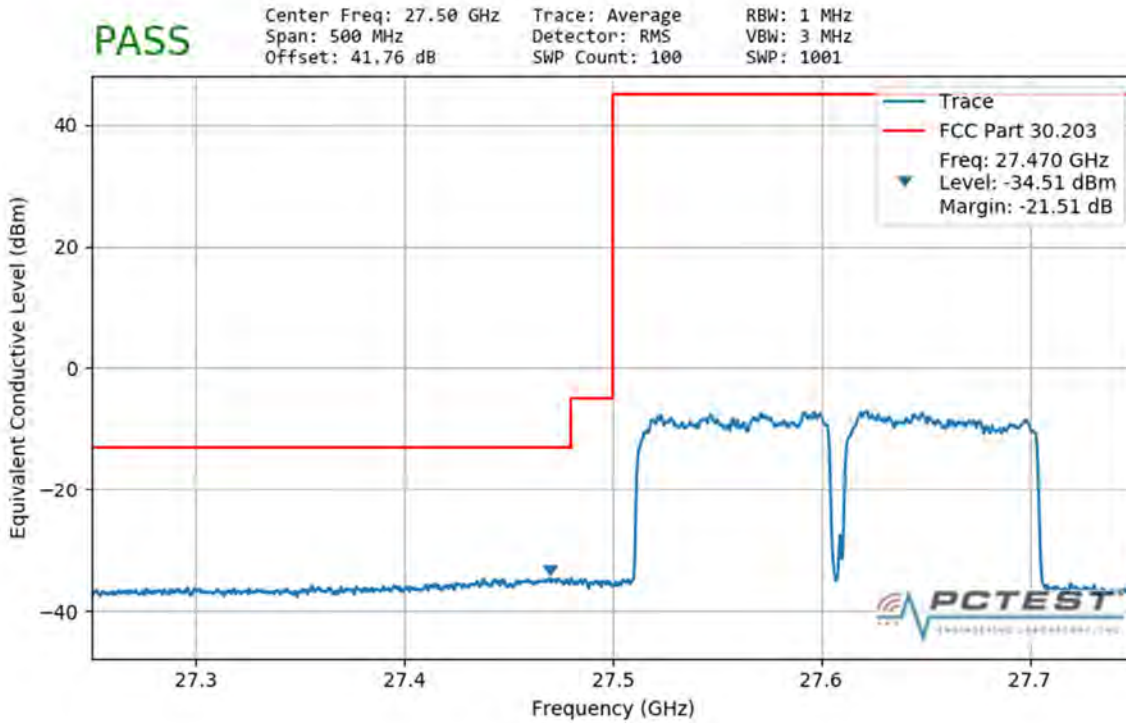


**Plot 7-227. Ant1 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

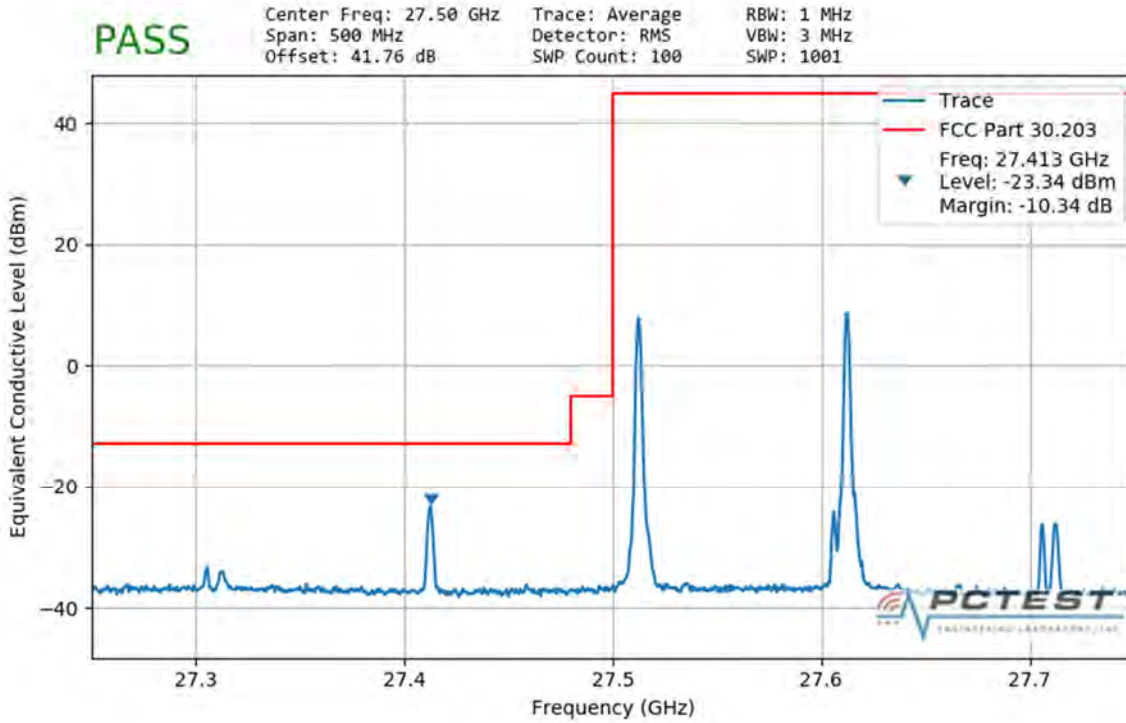


**Plot 7-228. Ant1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 218 of 286



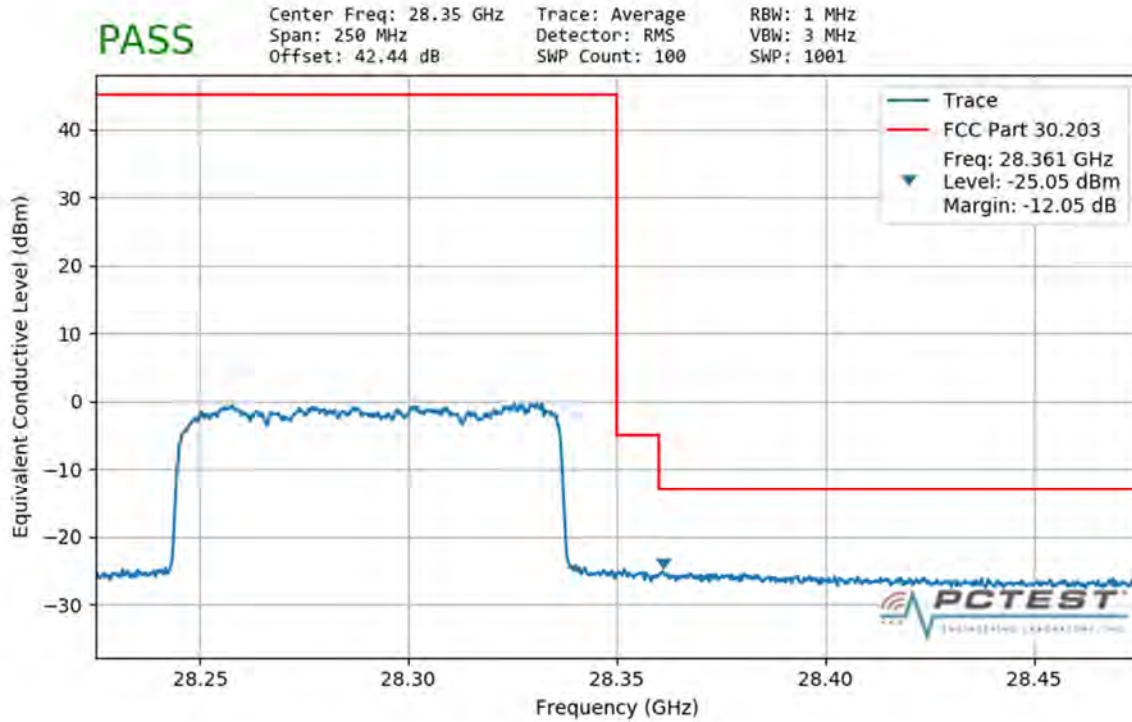


**Plot 7-229. Ant1 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

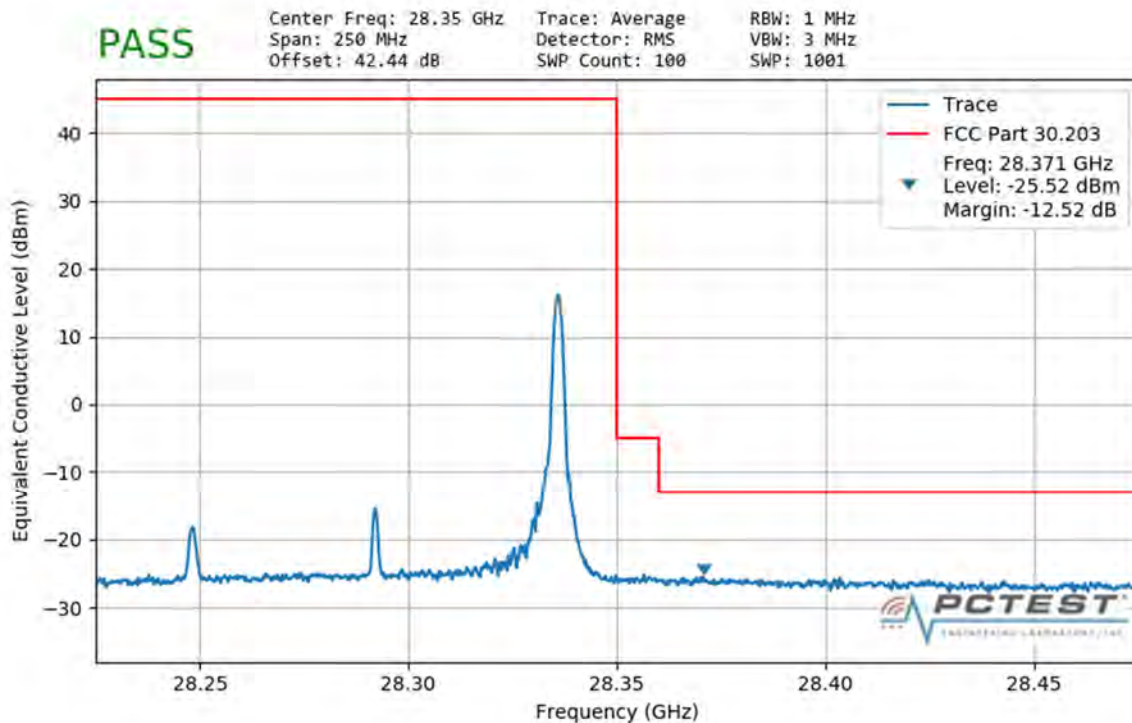


**Plot 7-230. Ant1 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 219 of 286

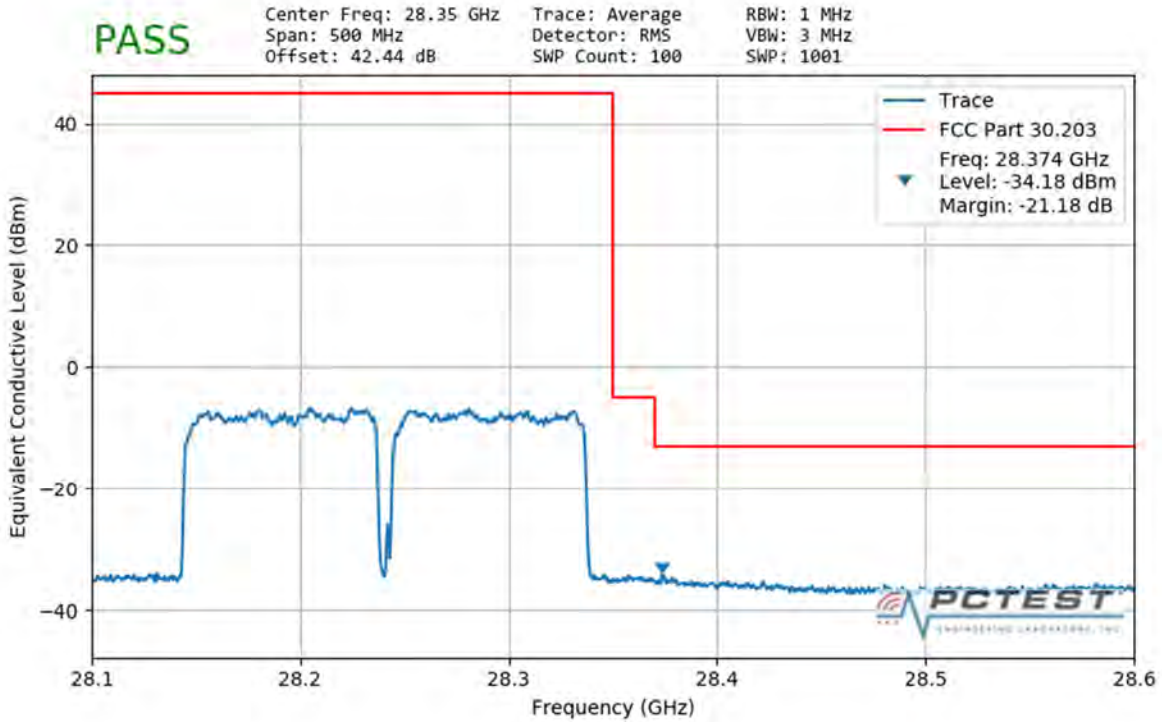


**Plot 7-231. Ant1 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

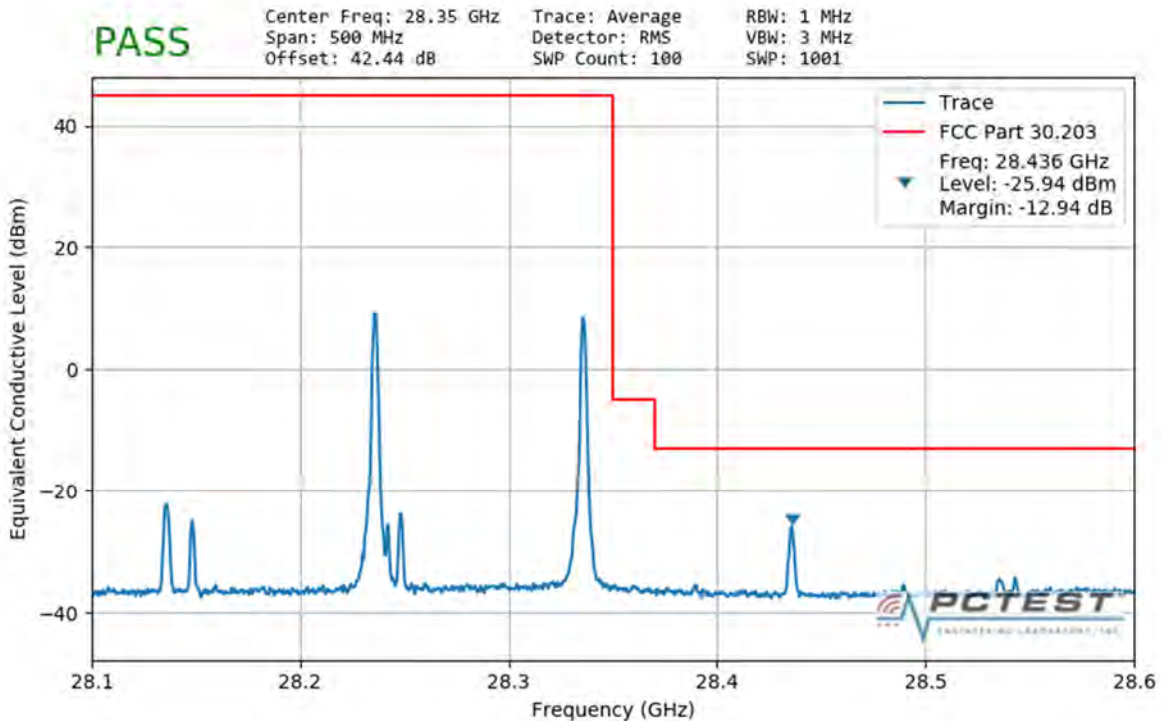


**Plot 7-232. Ant1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 220 of 286

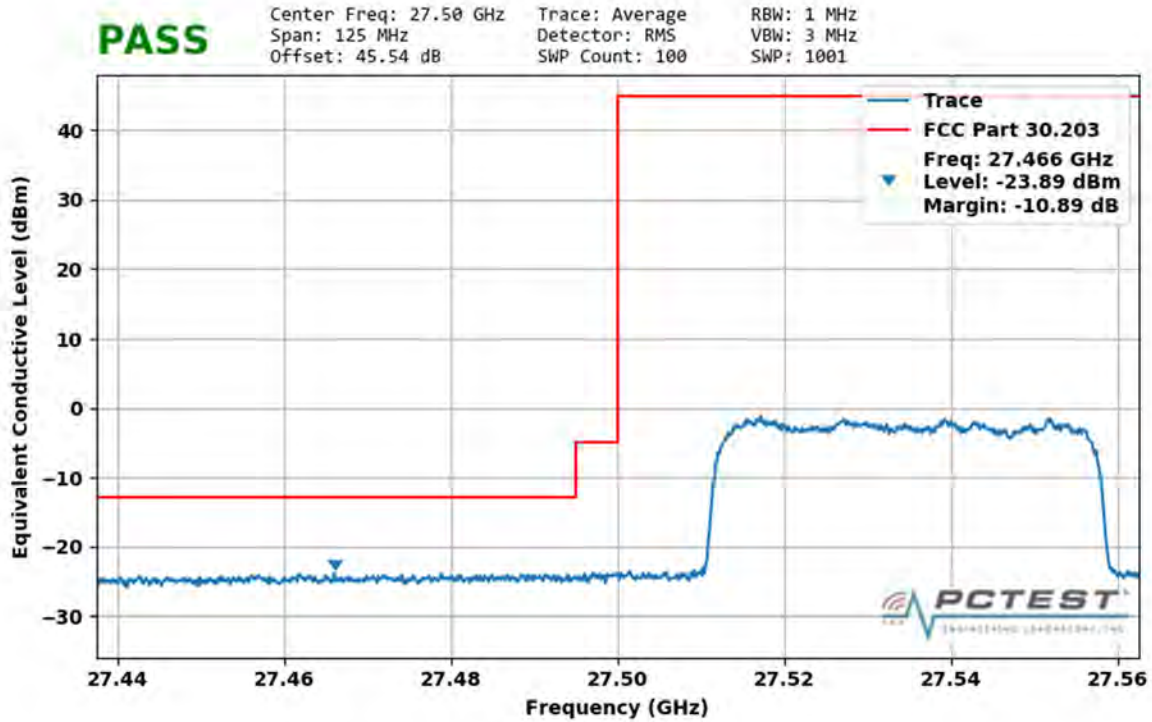


Plot 7-233. Ant2 Lower Band Edge (50MHz-1CC – QPSK Full RB)

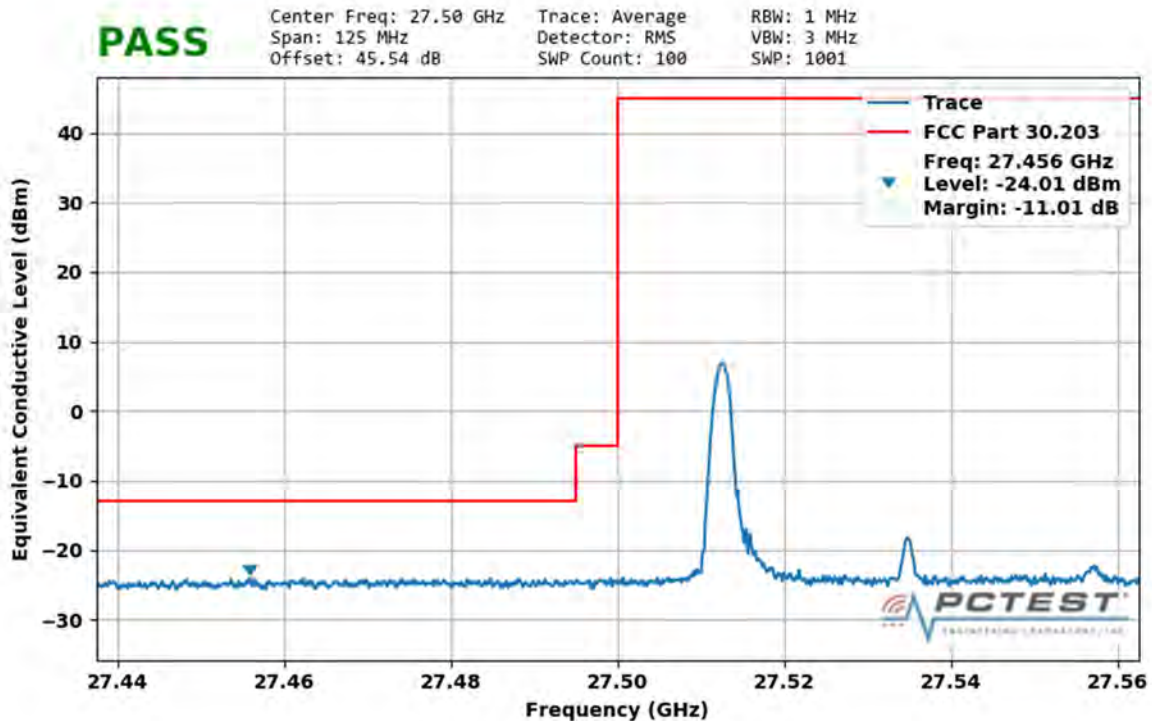


Plot 7-234. Ant2 Lower Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 221 of 286

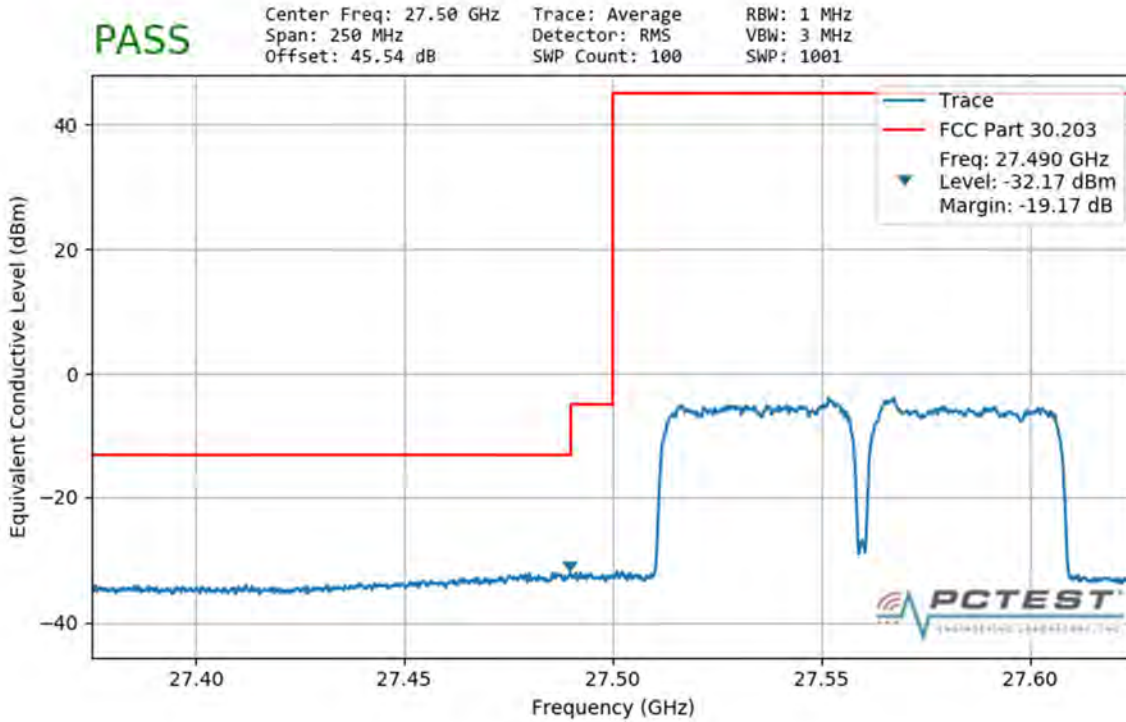


**Plot 7-235. Ant2 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

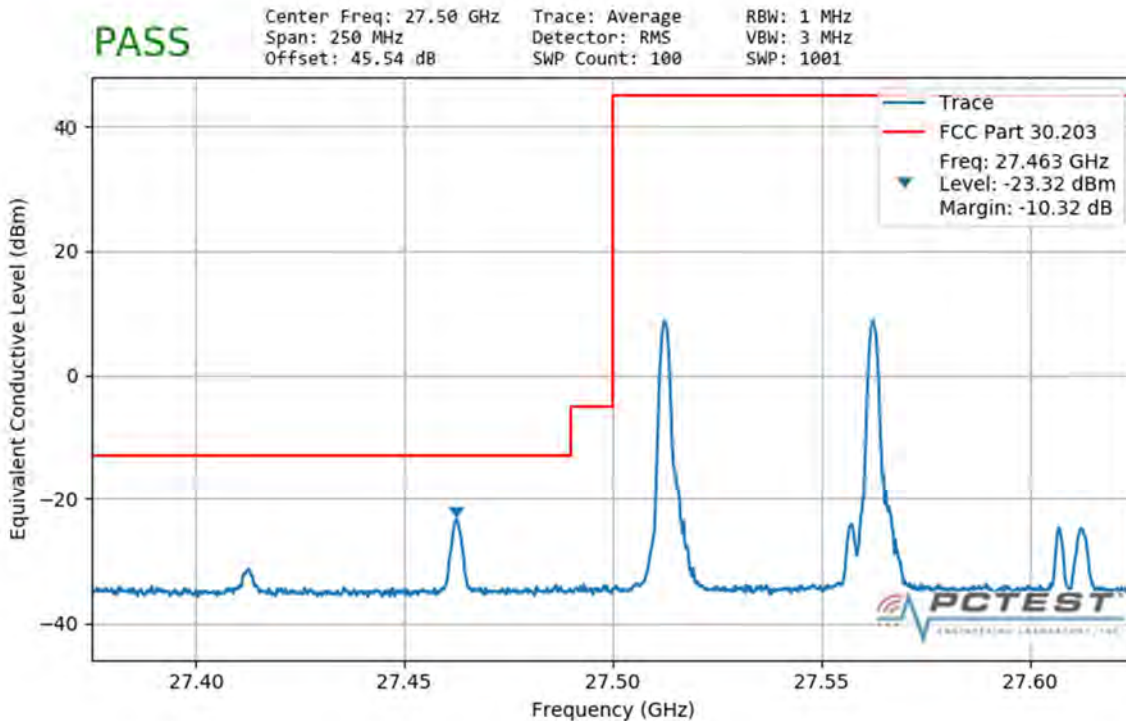


**Plot 7-236. Ant2 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 222 of 286

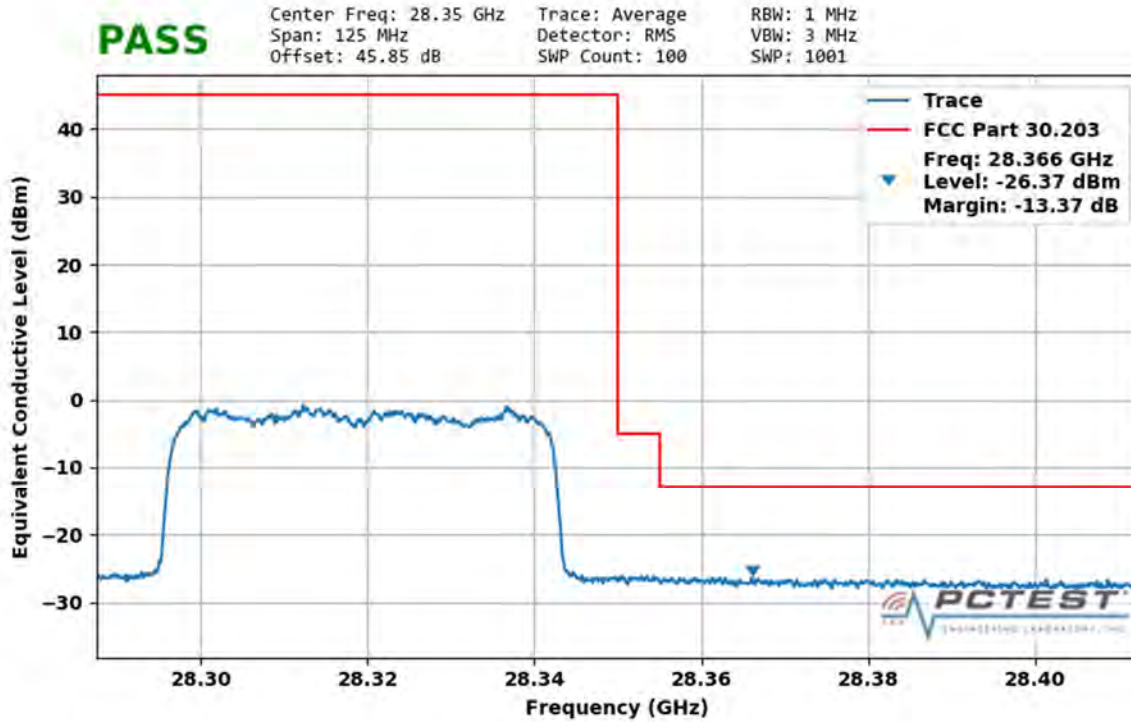


Plot 7-237. Ant2 Upper Band Edge (50MHz-1CC – QPSK Full RB)

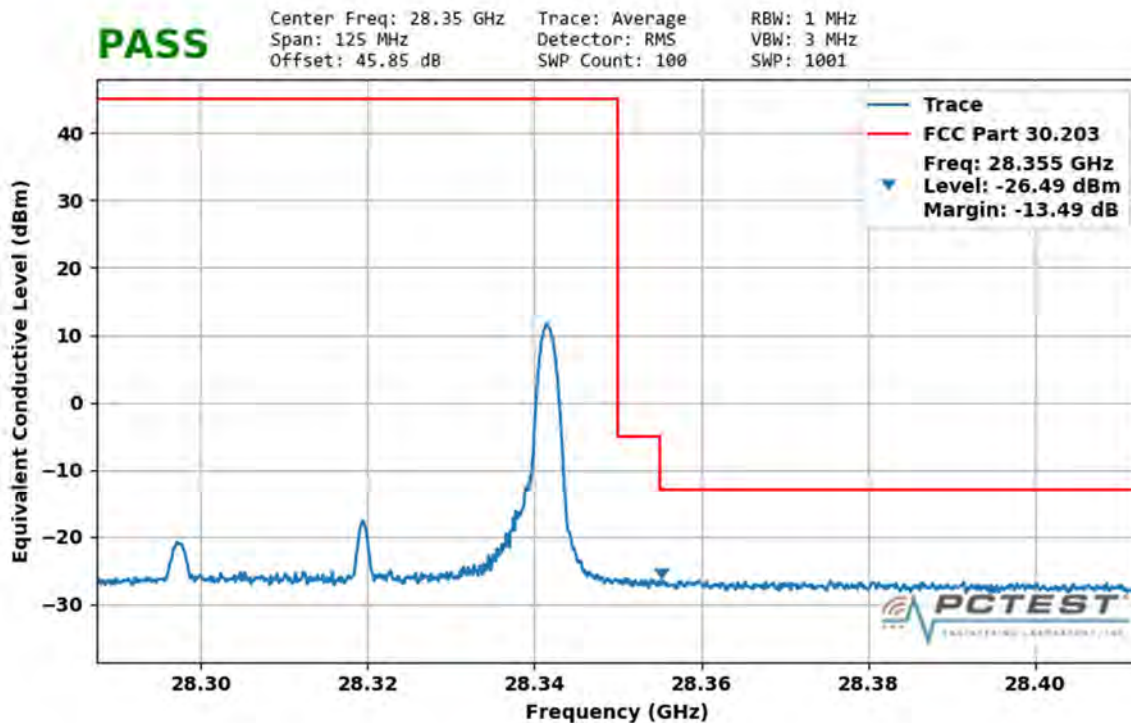


Plot 7-238. Ant2 Upper Band Edge (50MHz-1CC – QPSK 1 RB)

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 223 of 286

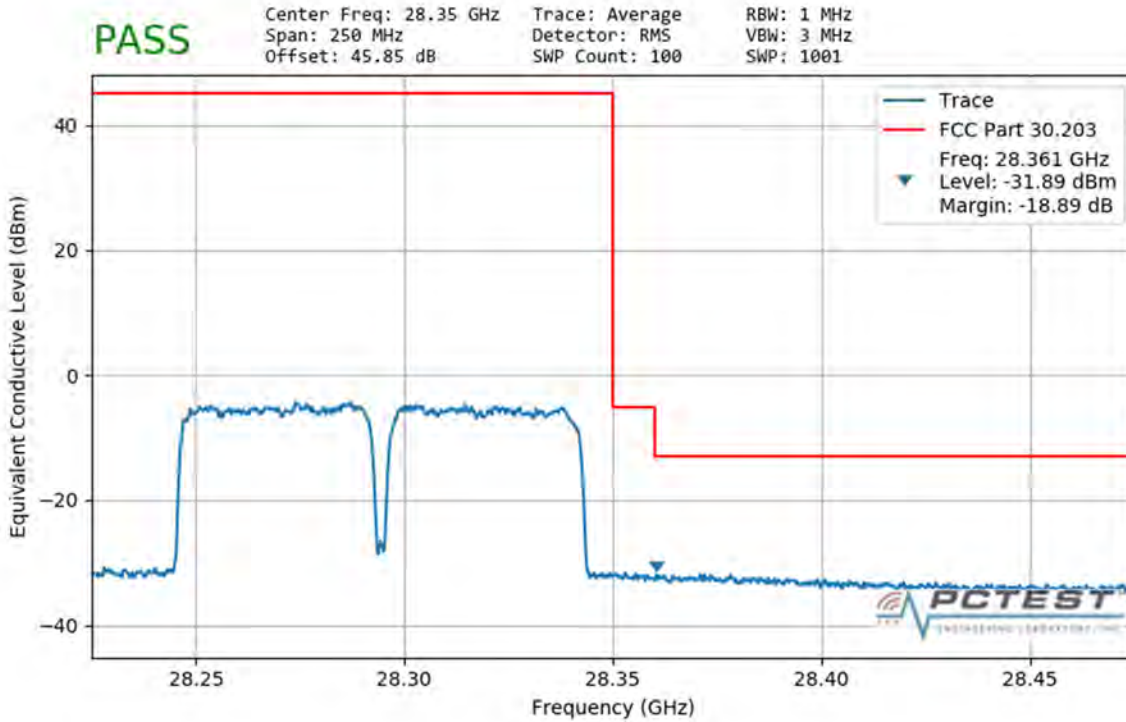


**Plot 7-239. Ant2 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

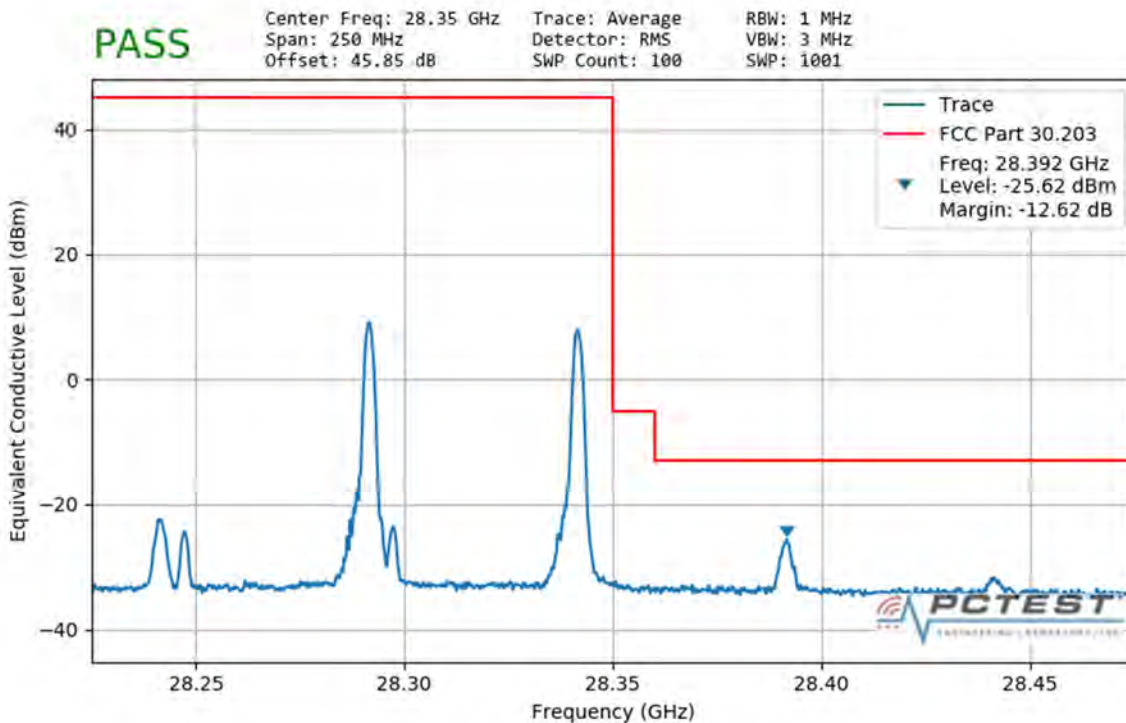


**Plot 7-240. Ant2 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 224 of 286

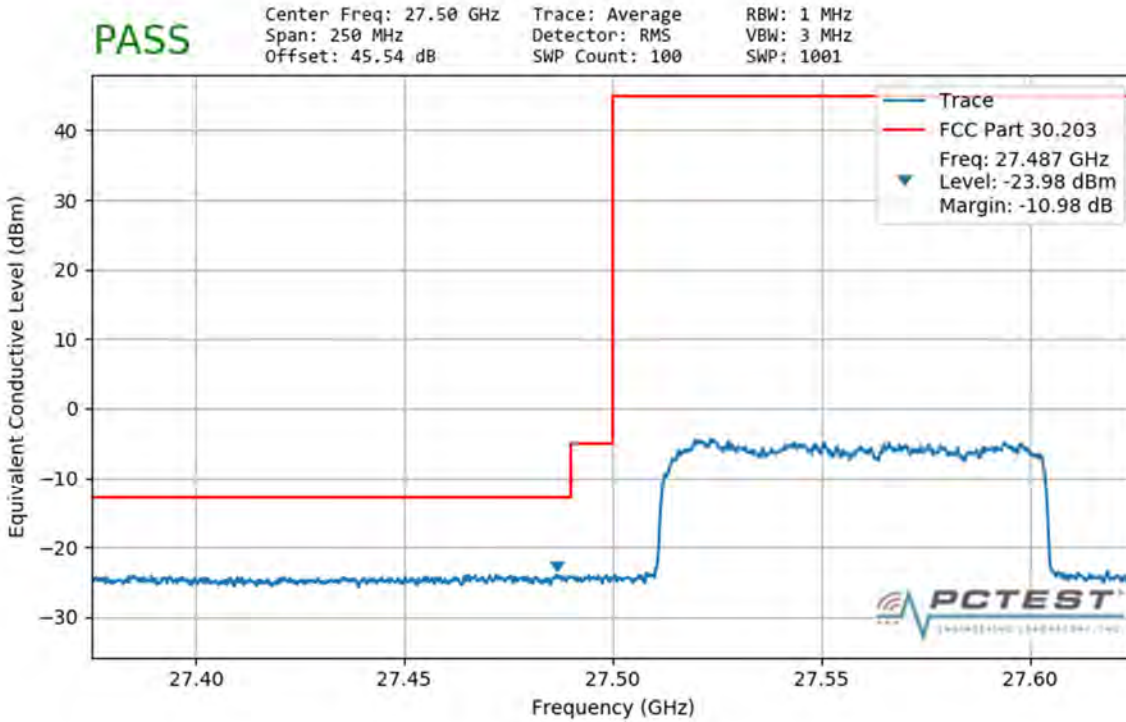


**Plot 7-241. Ant2 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

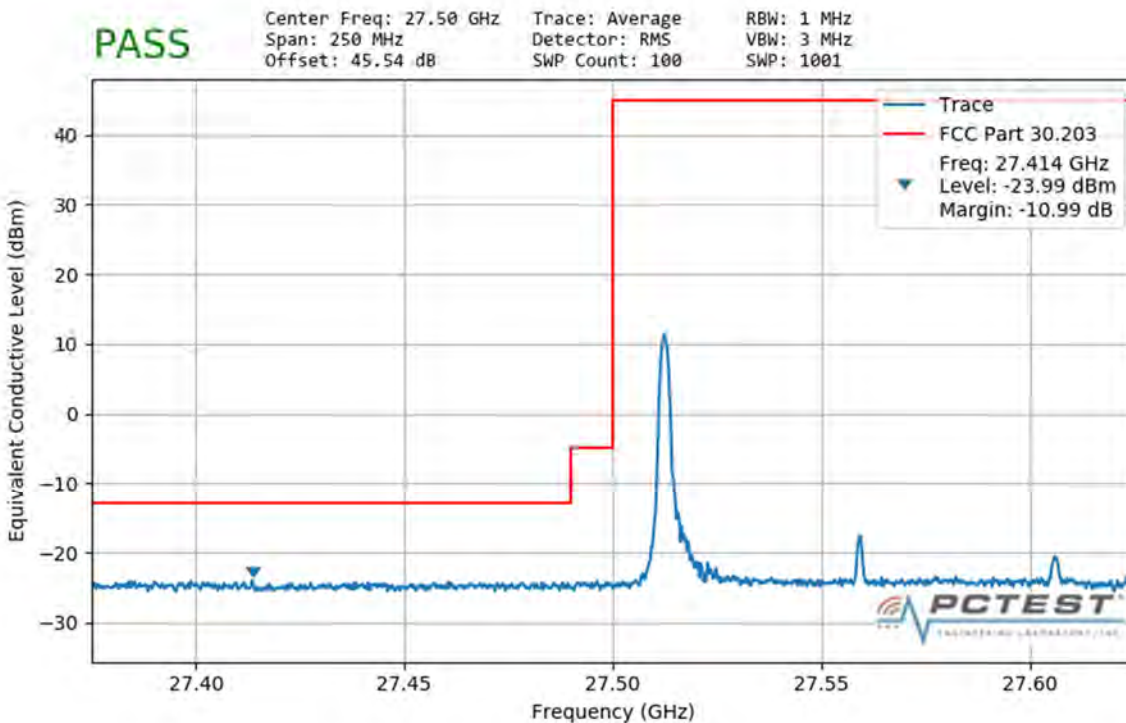


**Plot 7-242. Ant2 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 225 of 286

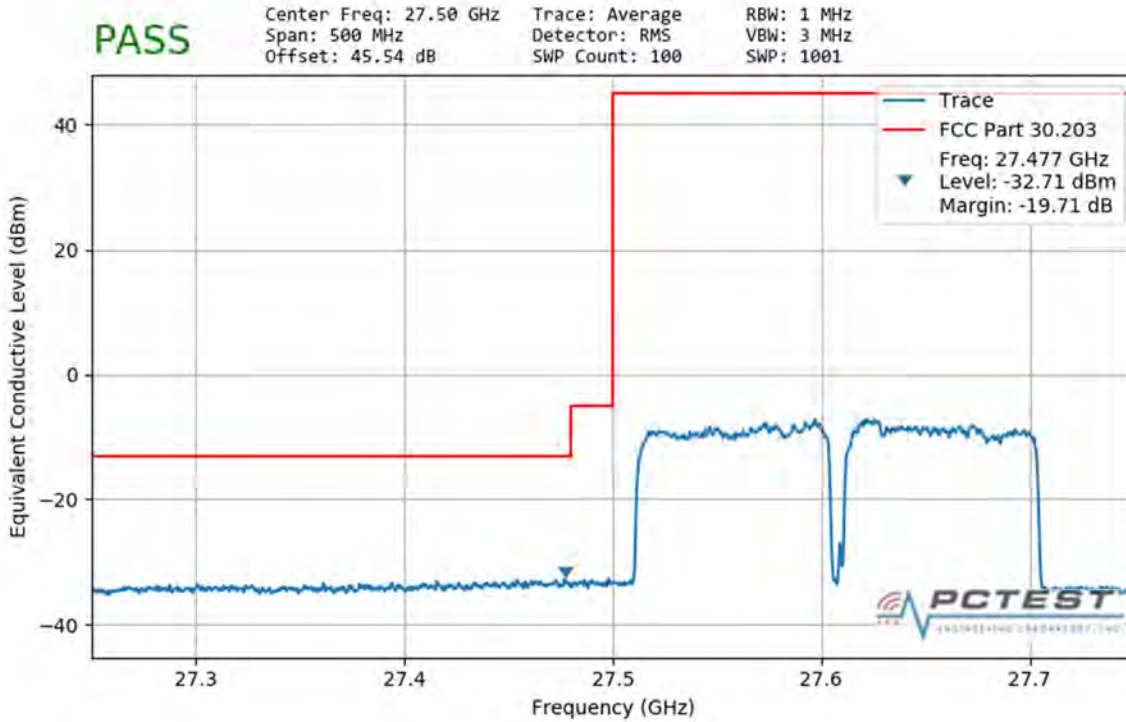


**Plot 7-243. Ant2 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

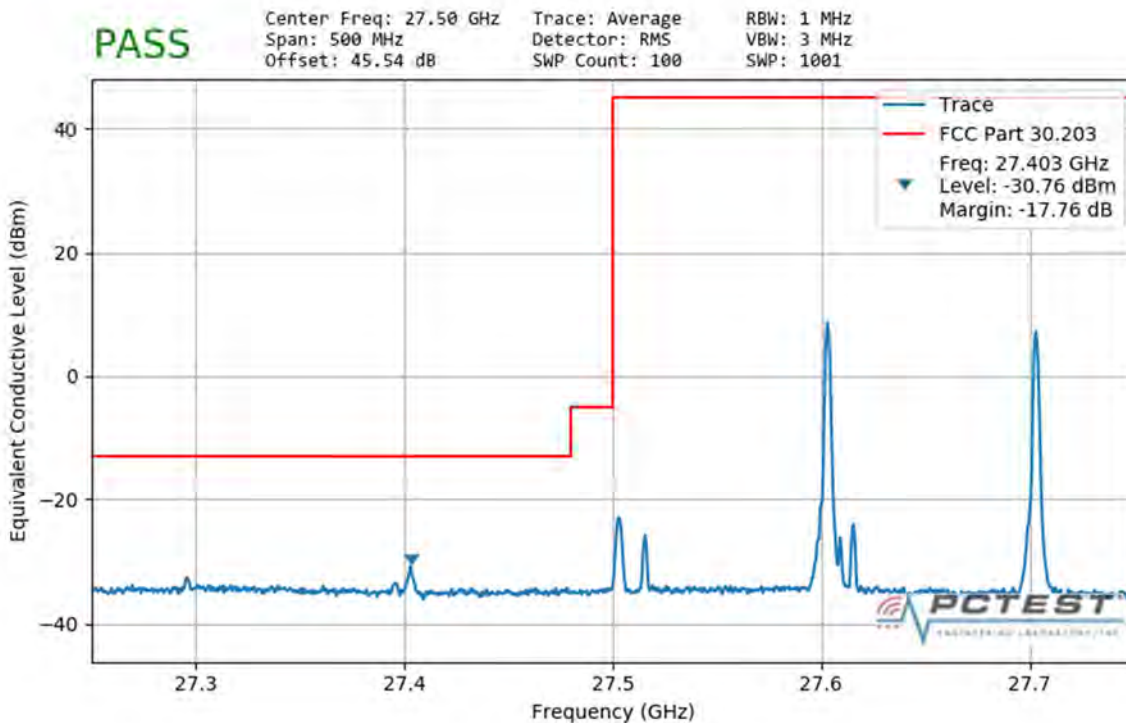


**Plot 7-244. Ant2 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 226 of 286



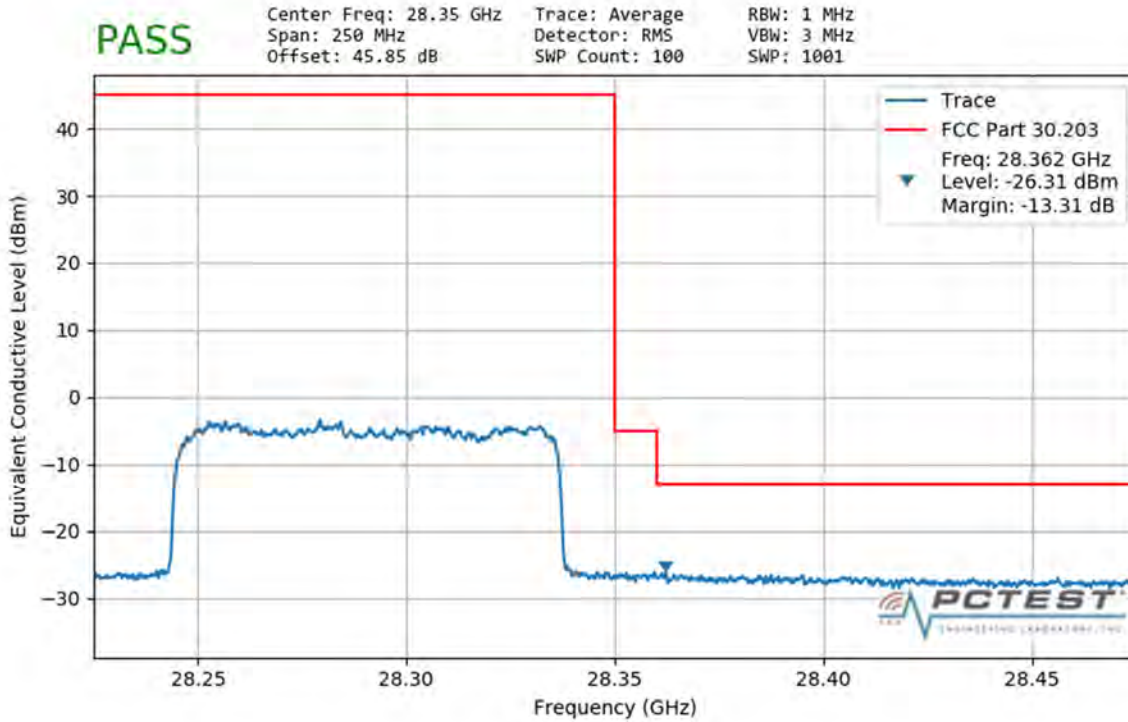


**Plot 7-245. Ant2 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

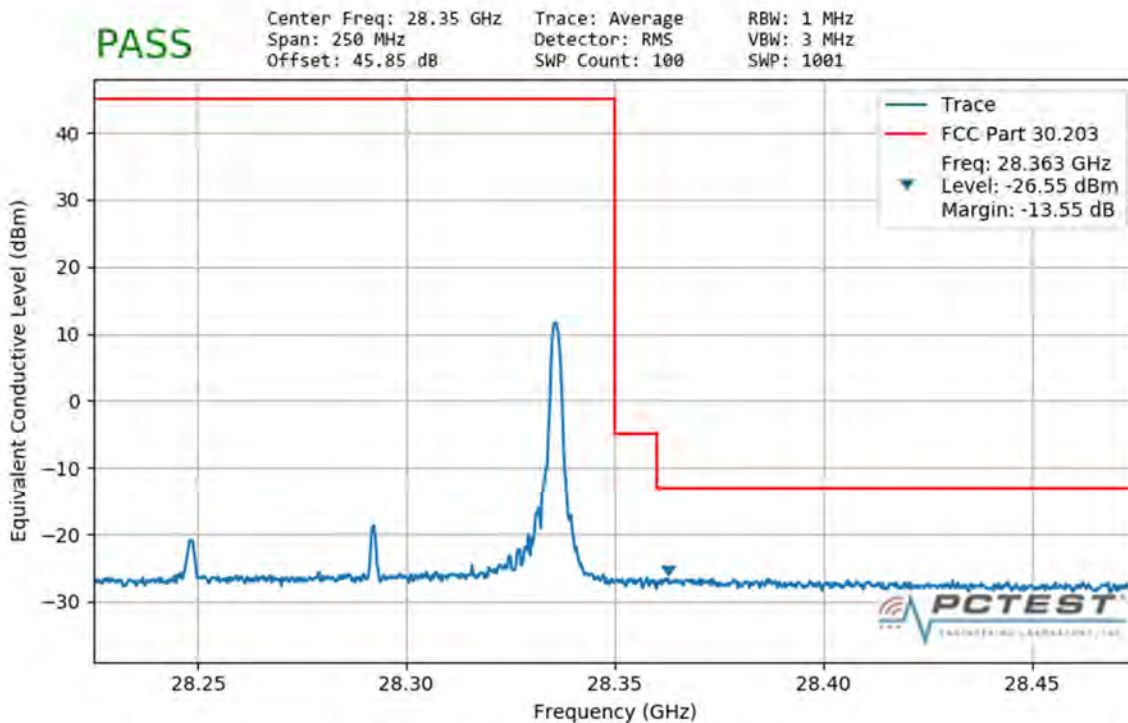


**Plot 7-246. Ant2 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 227 of 286

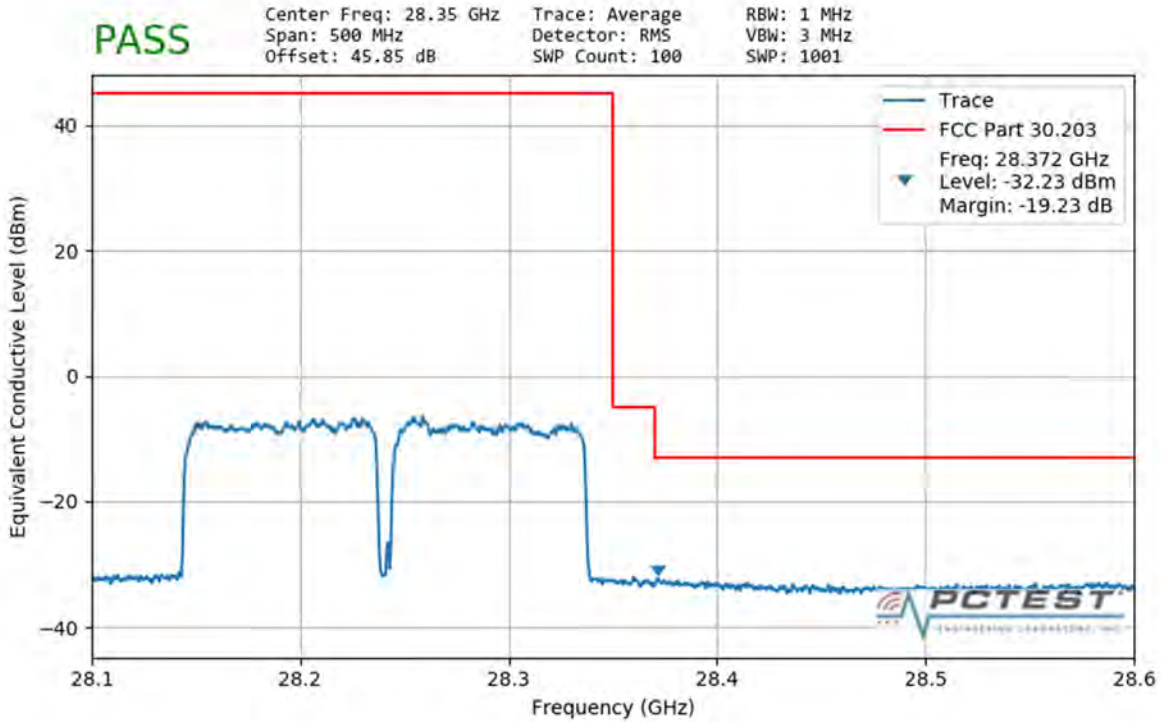


**Plot 7-247. Ant2 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

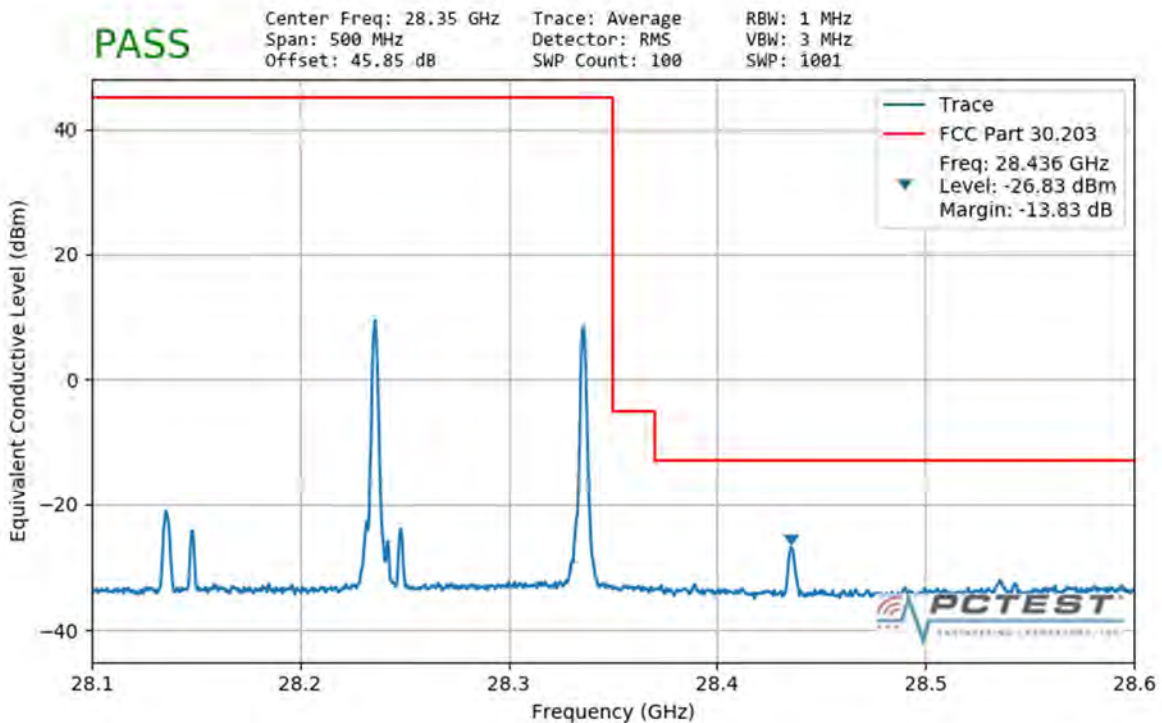


**Plot 7-248. Ant2 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 228 of 286

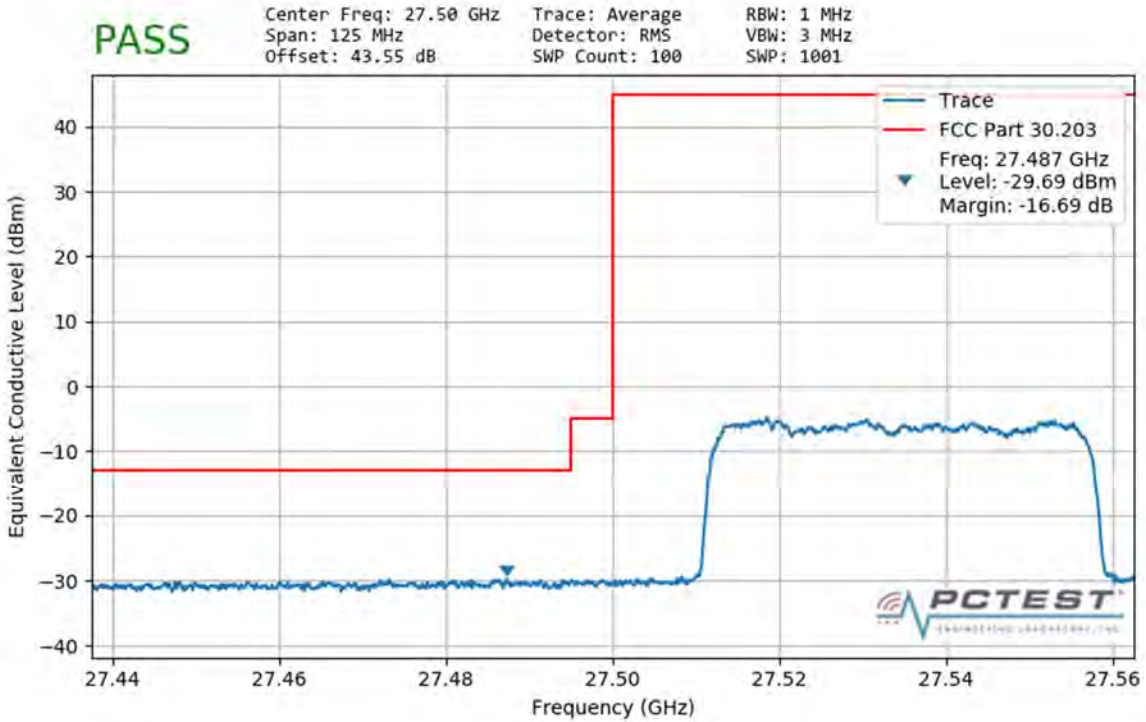


**Plot 7-249. Ant3 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

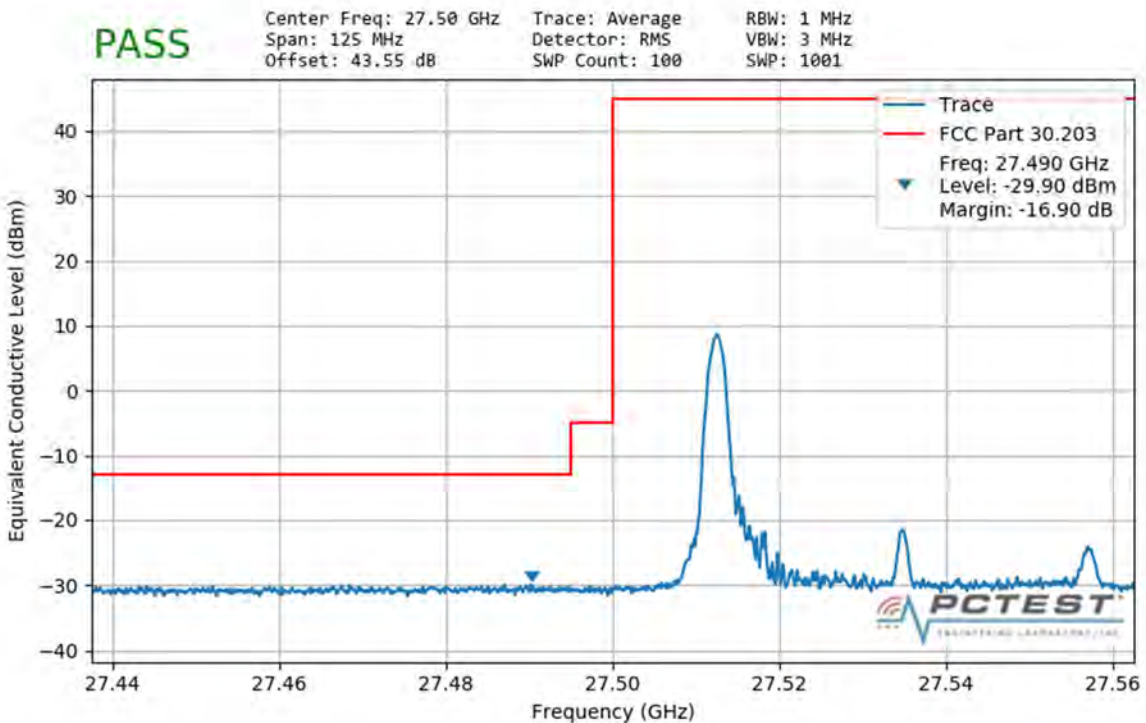


**Plot 7-250. Ant3 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 229 of 286

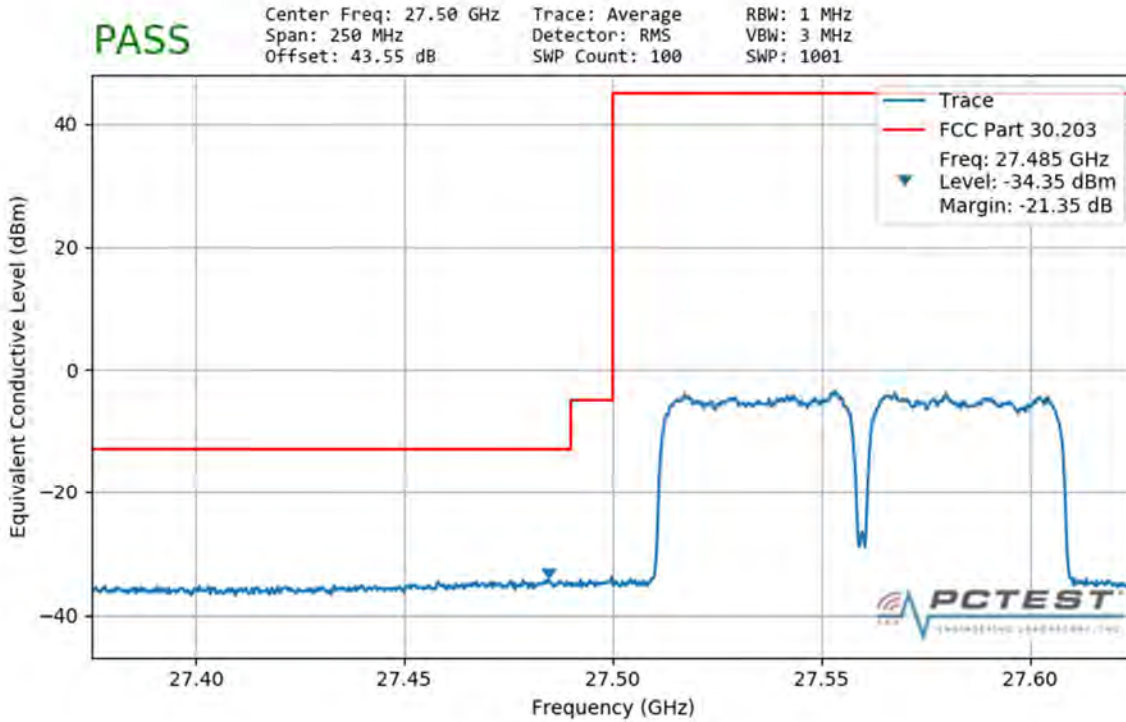


**Plot 7-251. Ant3 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

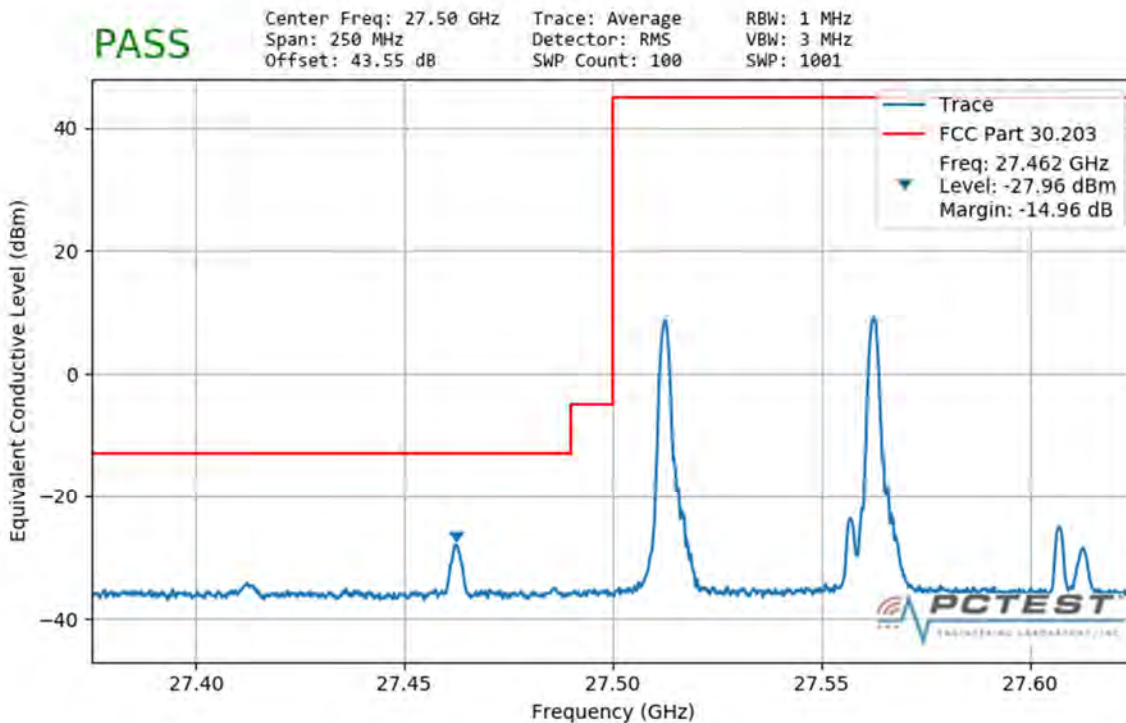


**Plot 7-252. Ant3 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 230 of 286

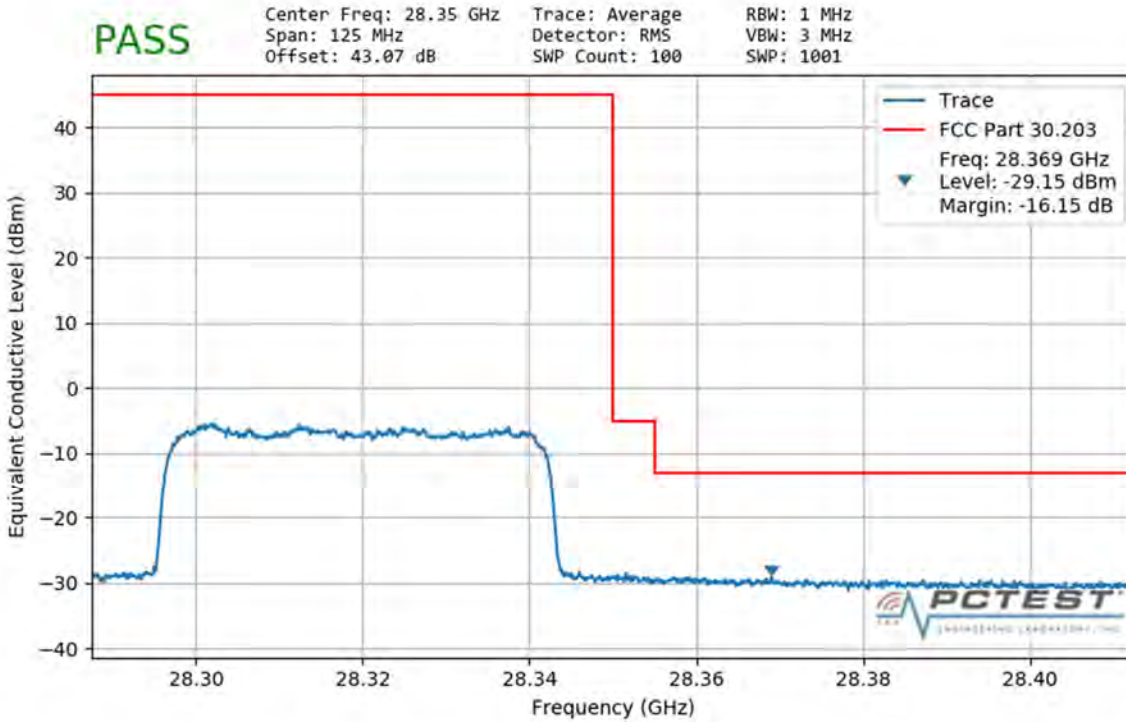


**Plot 7-253. Ant3 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

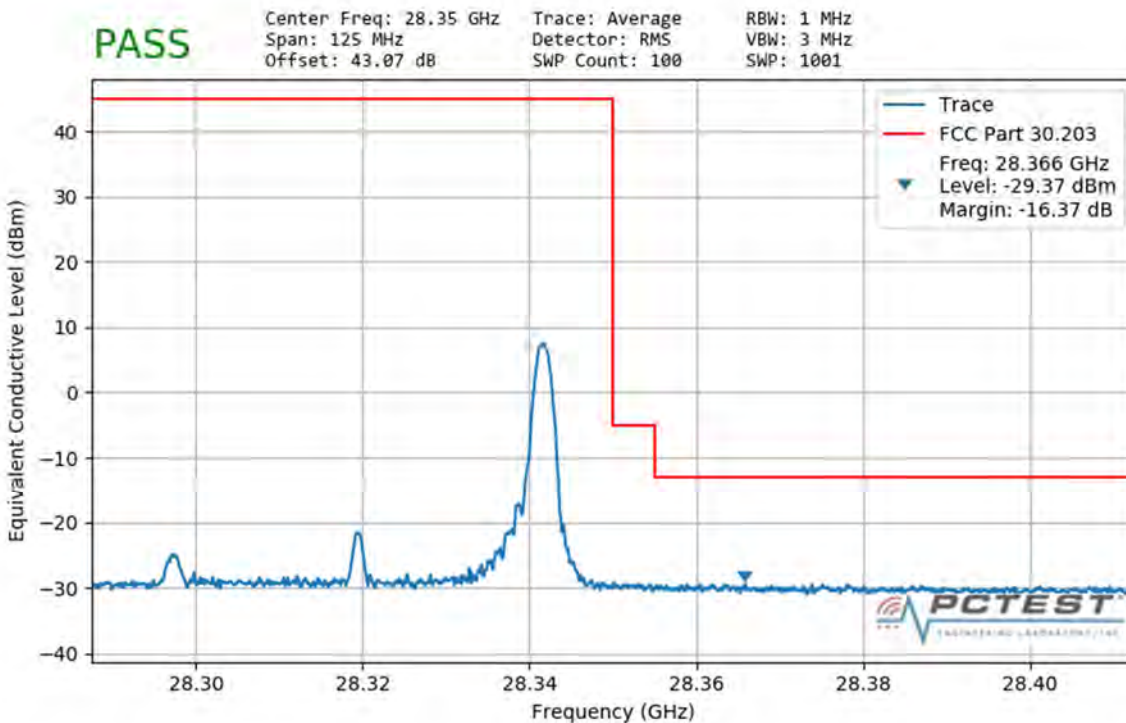


**Plot 7-254. Ant3 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 231 of 286

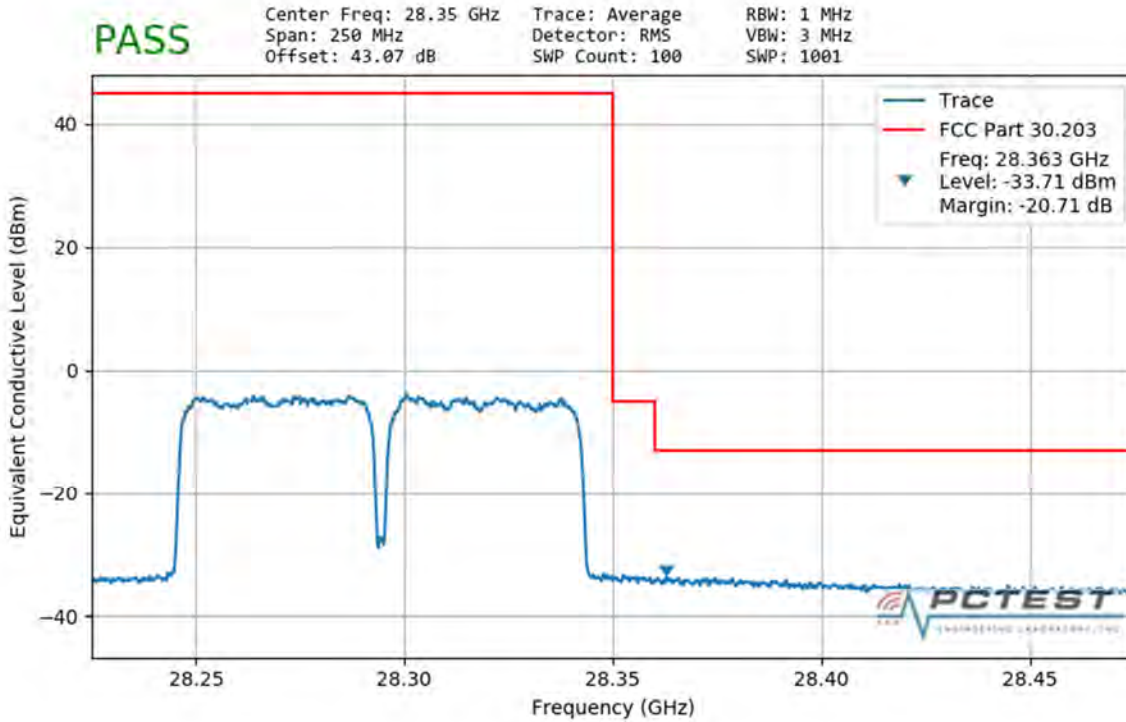


**Plot 7-255. Ant3 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

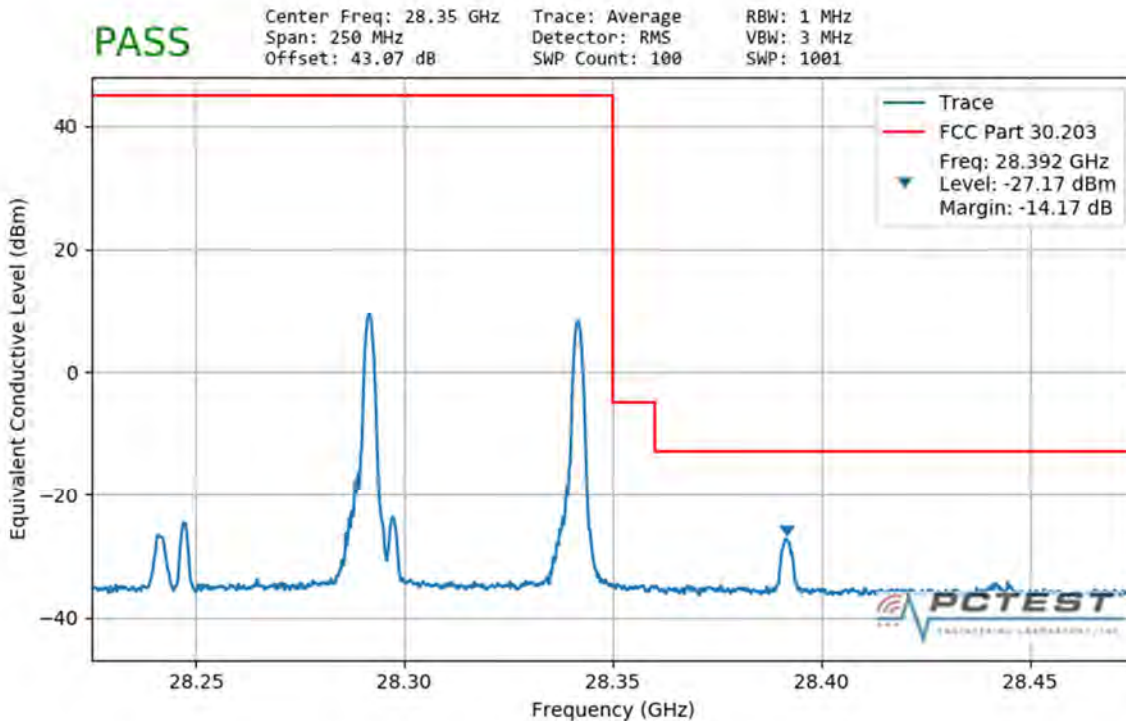


**Plot 7-256. Ant3 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 232 of 286

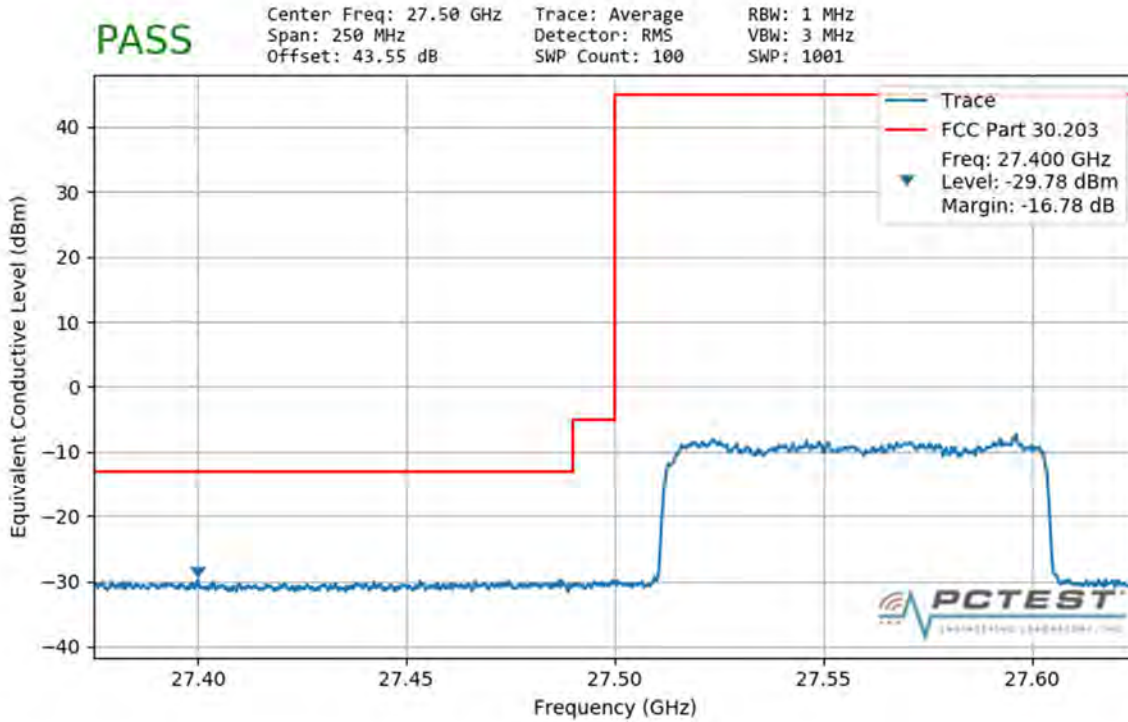


**Plot 7-257. Ant3 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

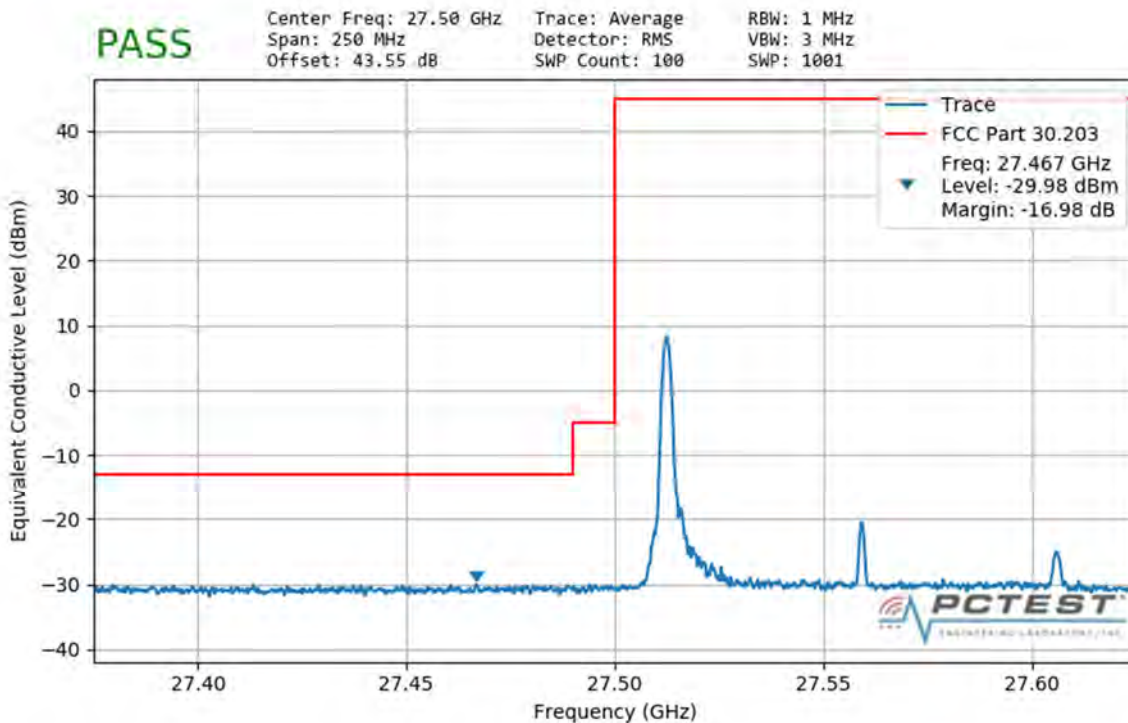


**Plot 7-258. Ant3 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 233 of 286

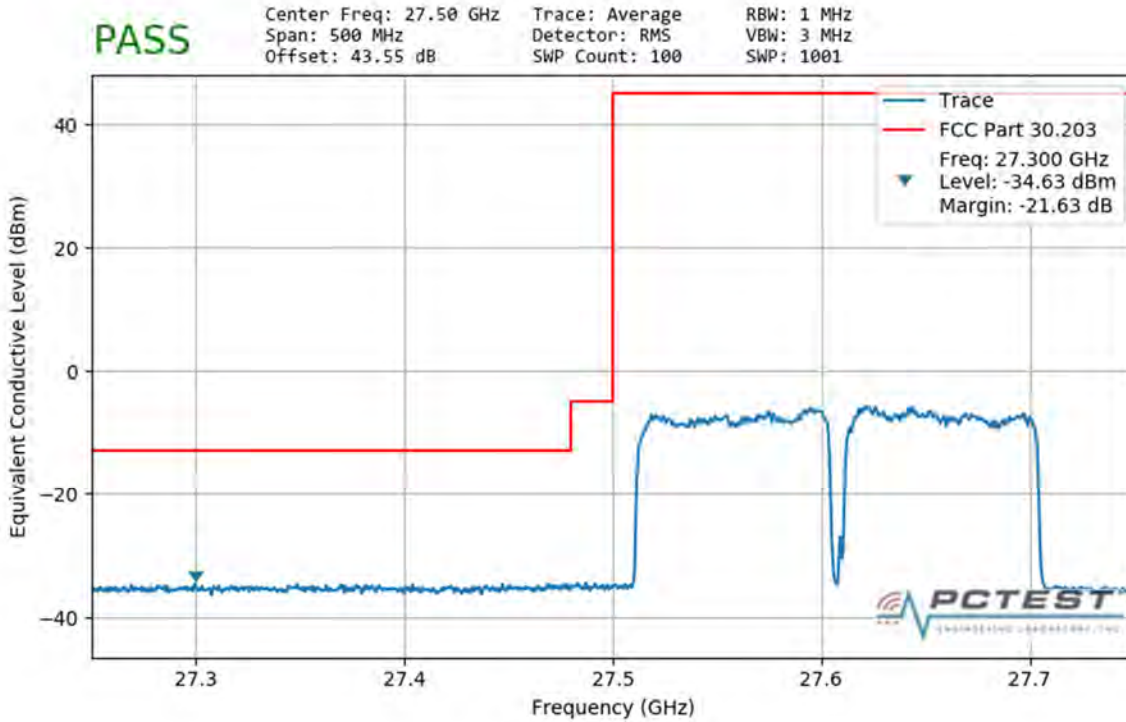


**Plot 7-259. Ant3 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

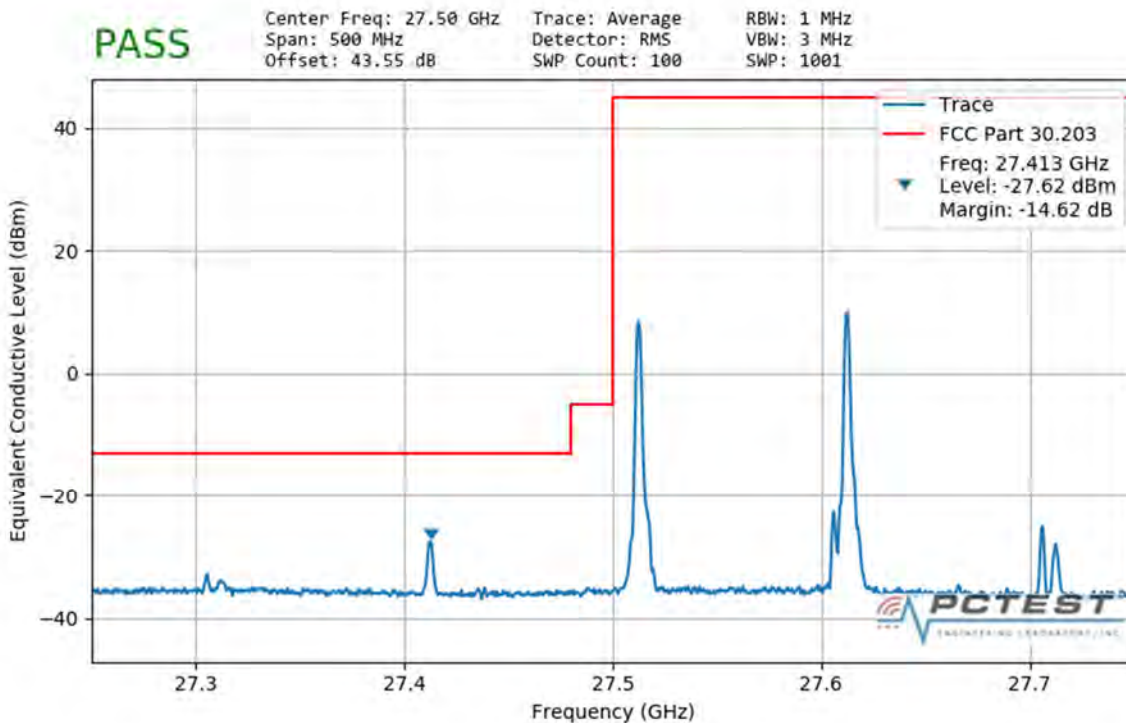


**Plot 7-260. Ant3 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 234 of 286



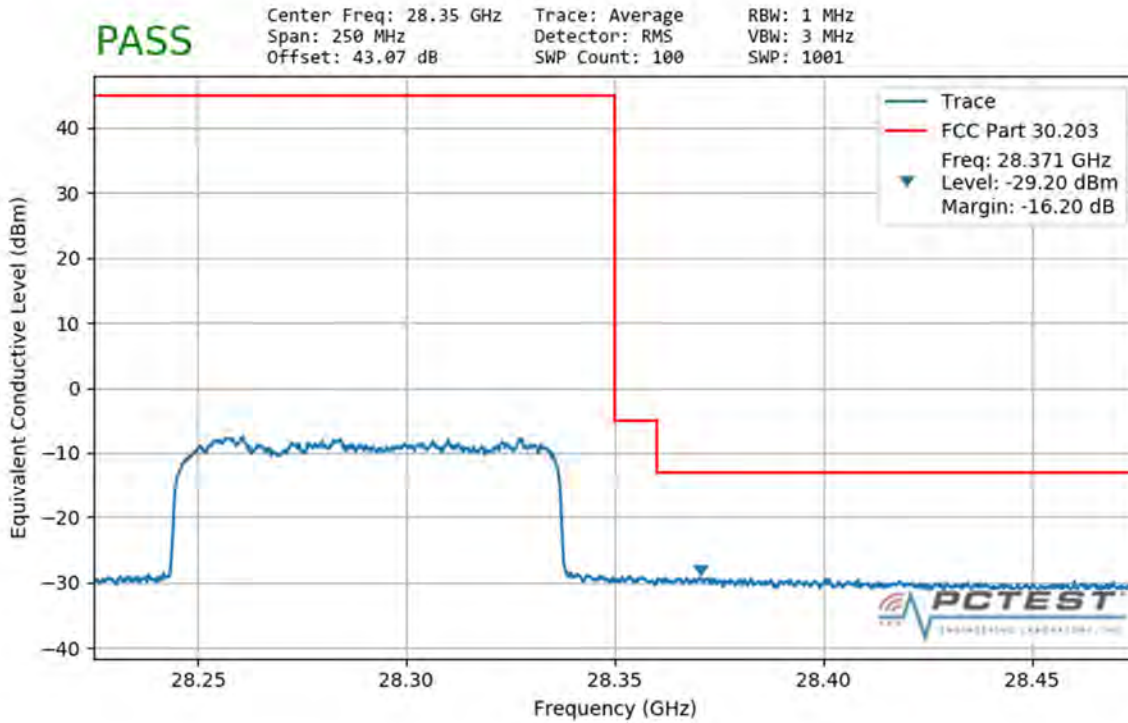


**Plot 7-261. Ant3 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

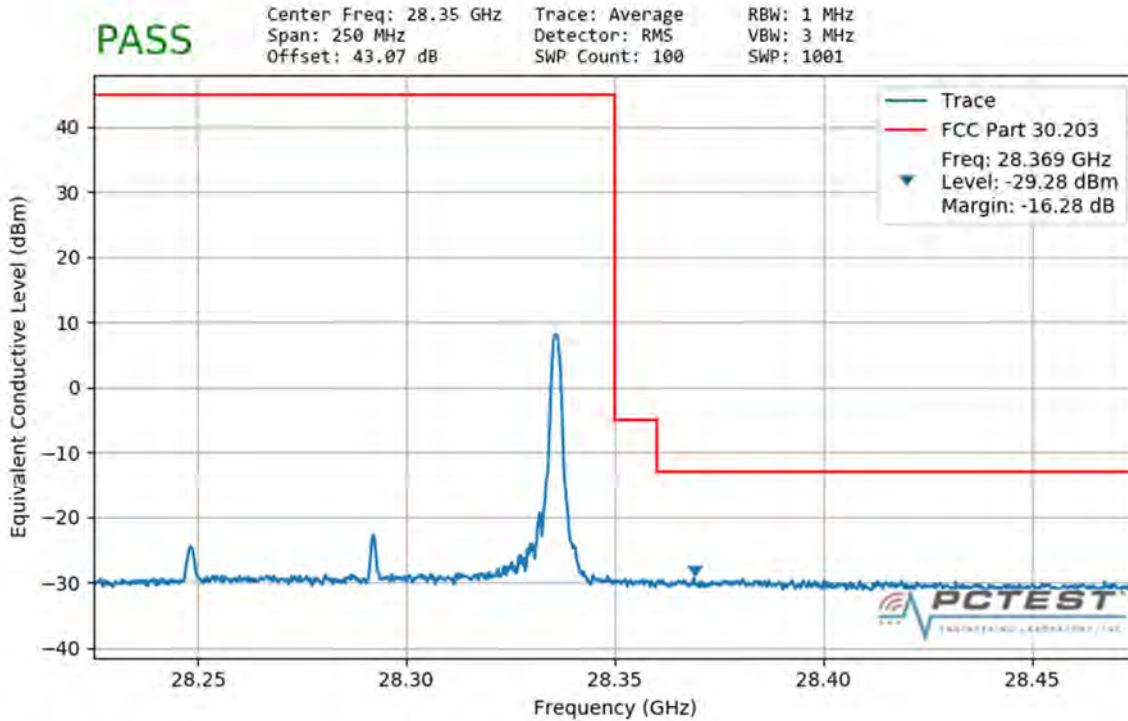


**Plot 7-262. Ant3 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 235 of 286

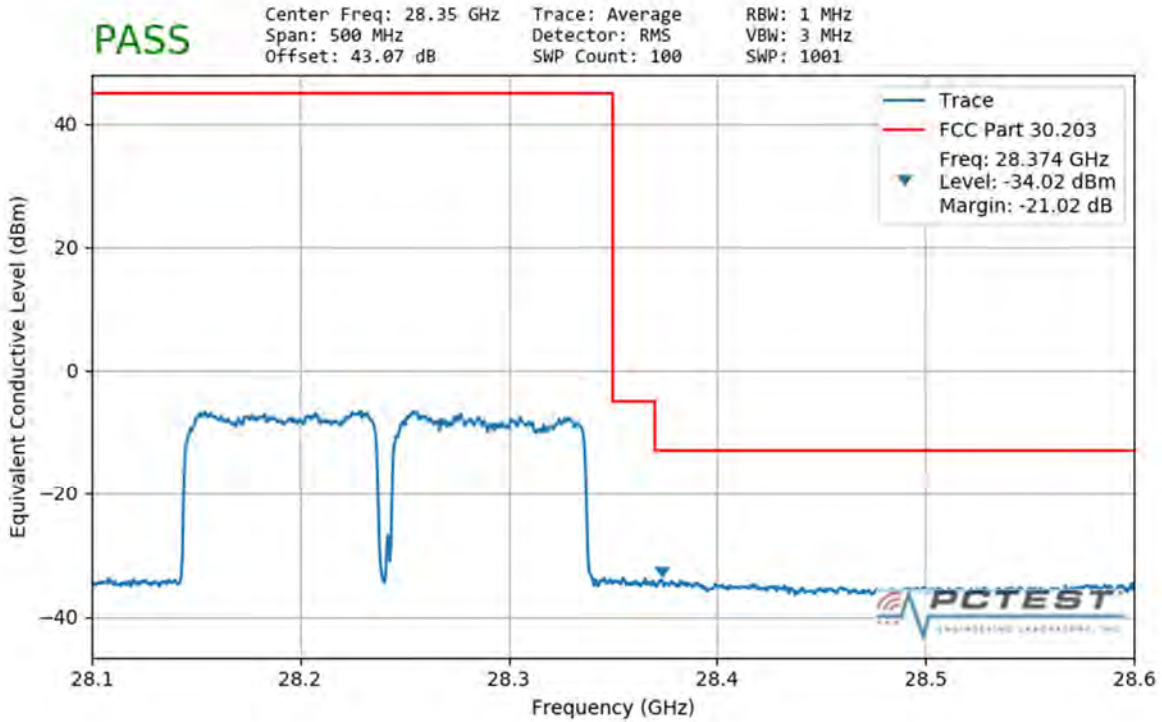


**Plot 7-263. Ant3 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

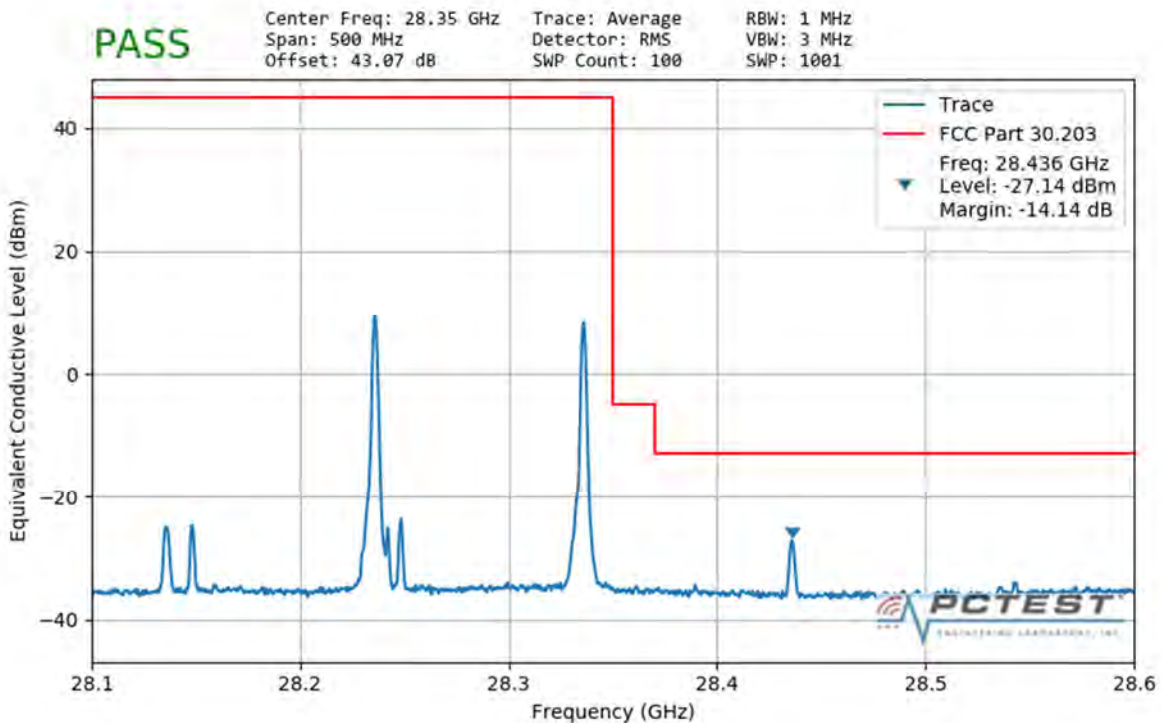


**Plot 7-264. Ant3 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 236 of 286

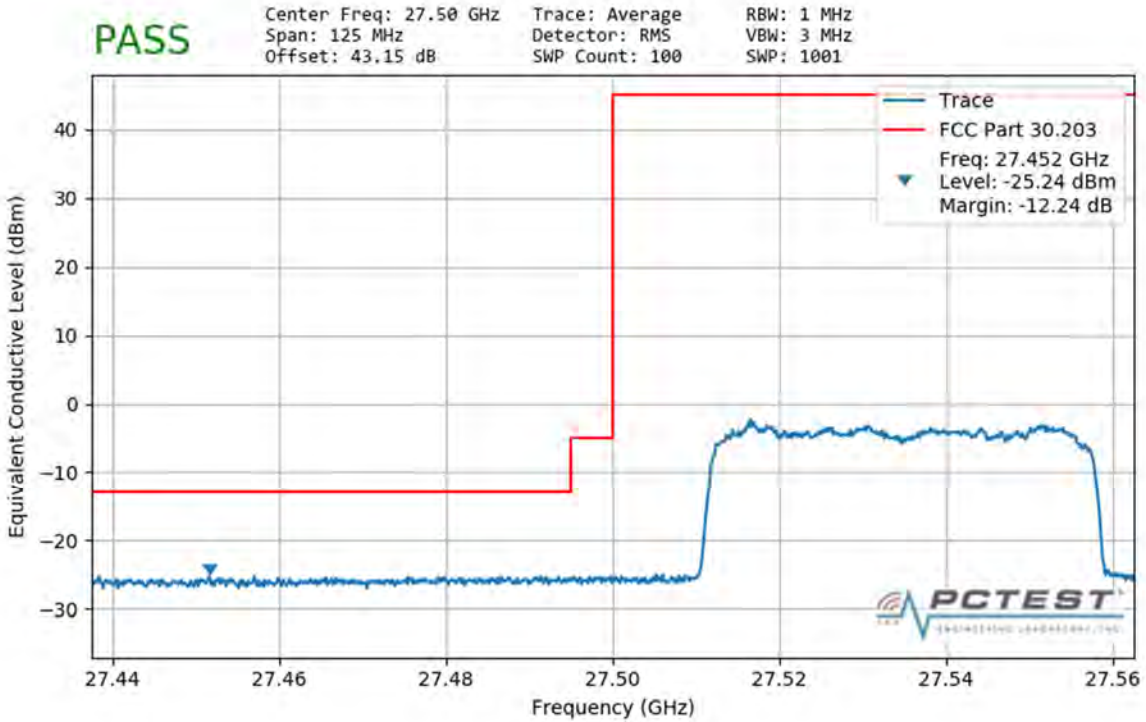


**Plot 7-265. Ant4 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

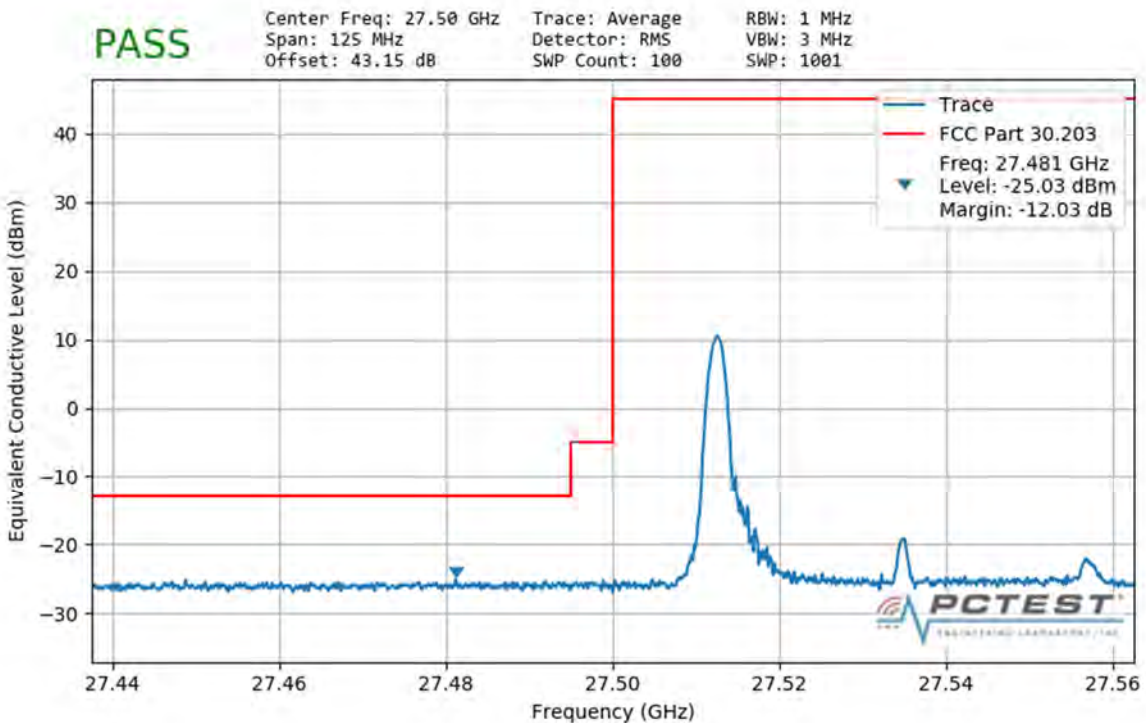


**Plot 7-266. Ant4 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 237 of 286

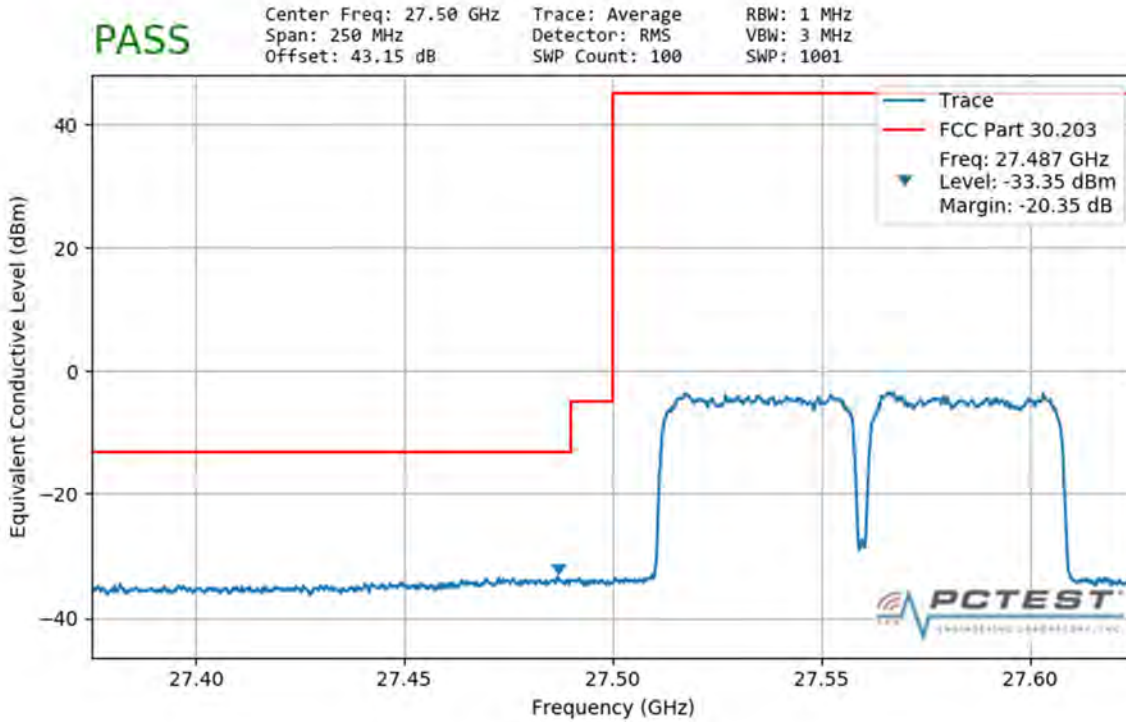

**Plot 7-267. Ant4 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

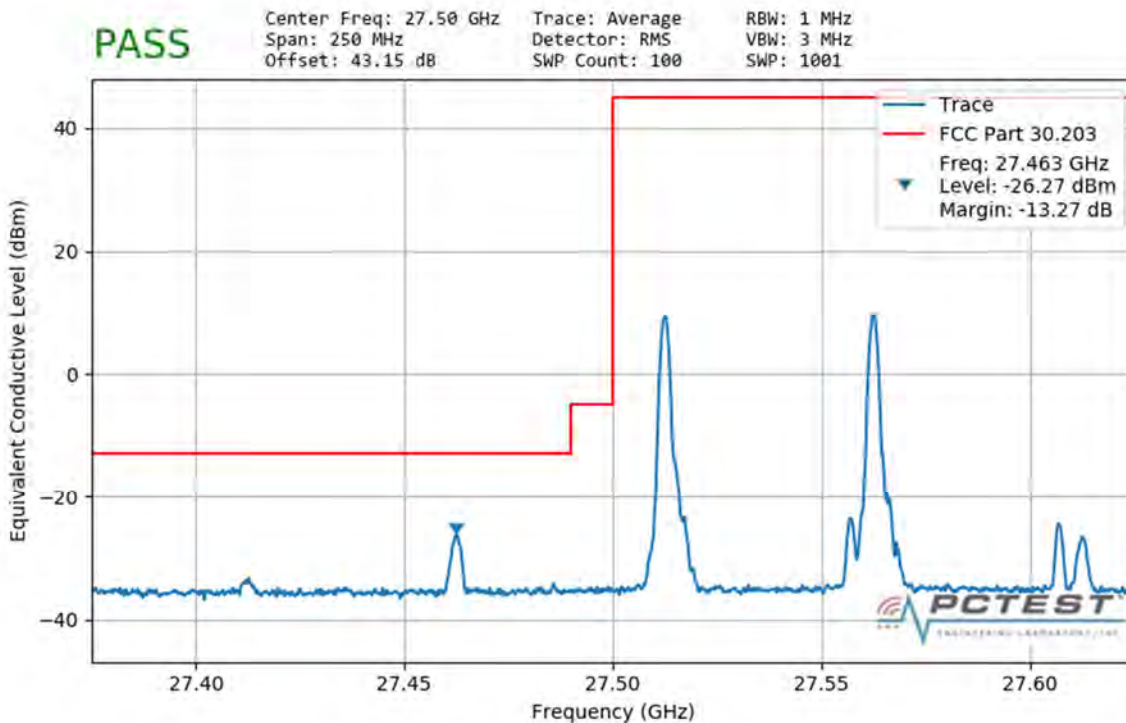


**Plot 7-268. Ant4 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset			Page 238 of 286




**Plot 7-269. Ant4 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

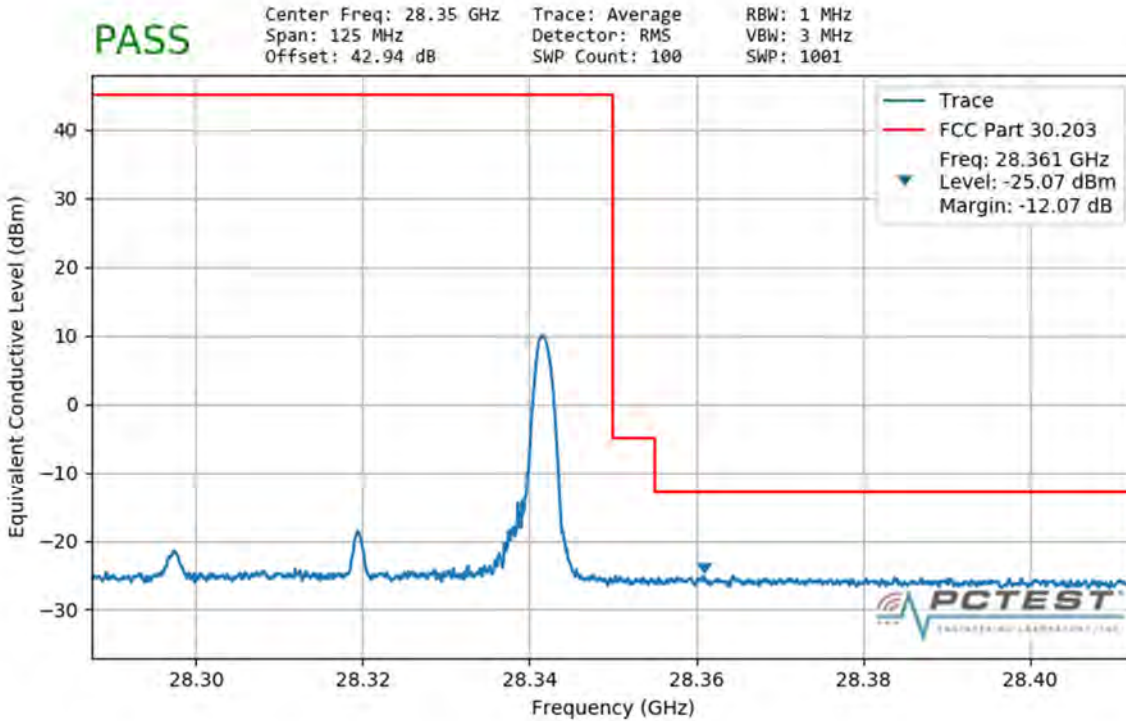


**Plot 7-270. Ant4 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 239 of 286

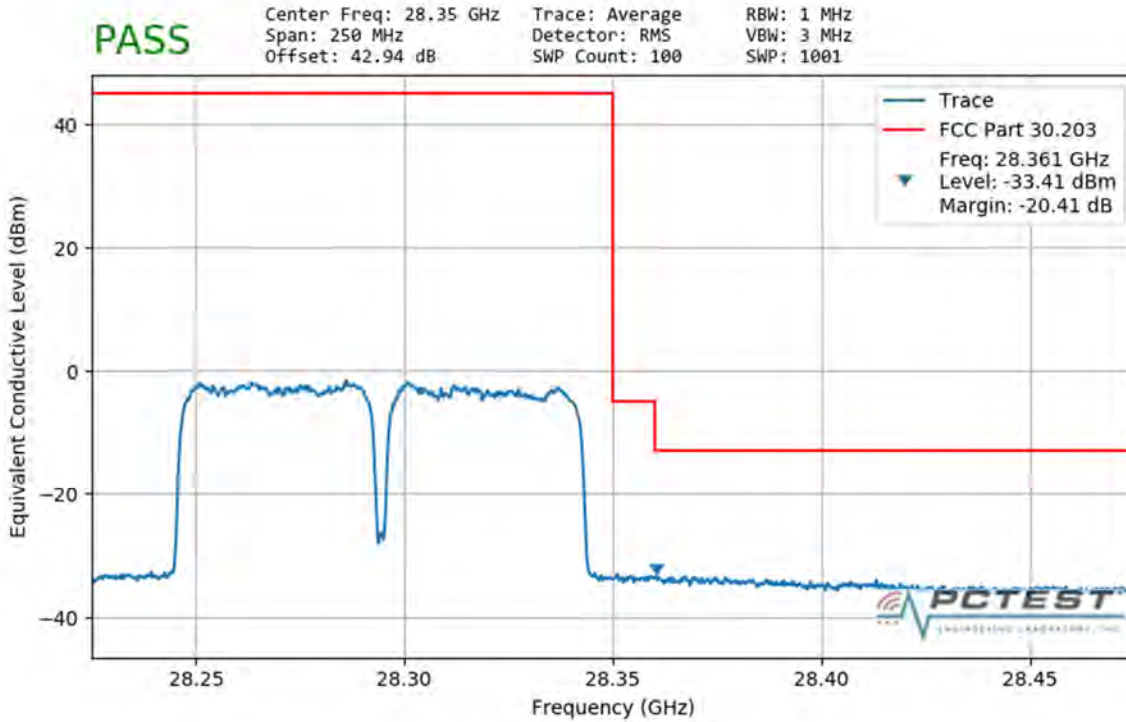


**Plot 7-271. Ant4 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

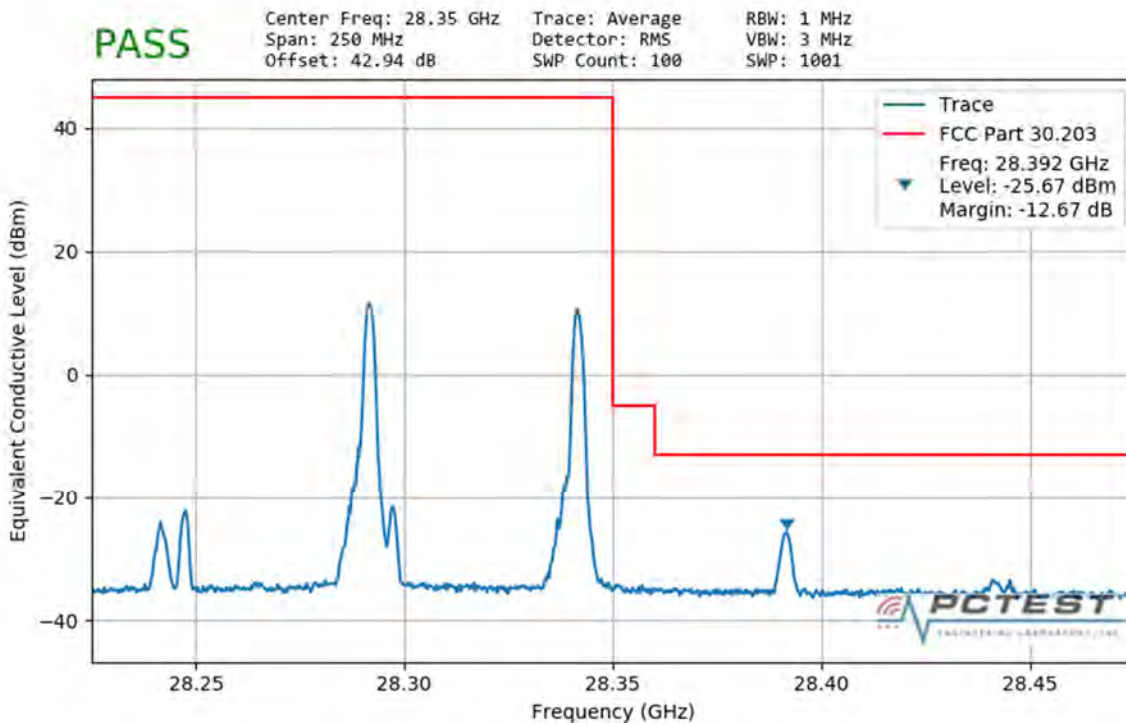


**Plot 7-272. Ant4 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 240 of 286

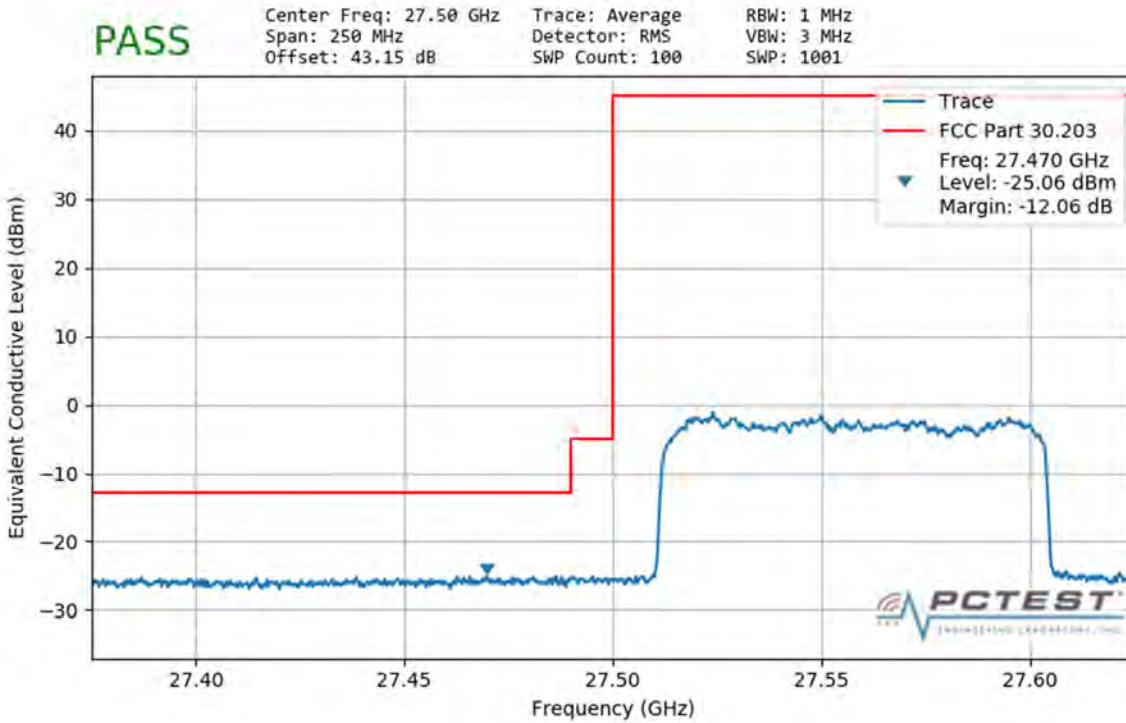


**Plot 7-273. Ant4 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

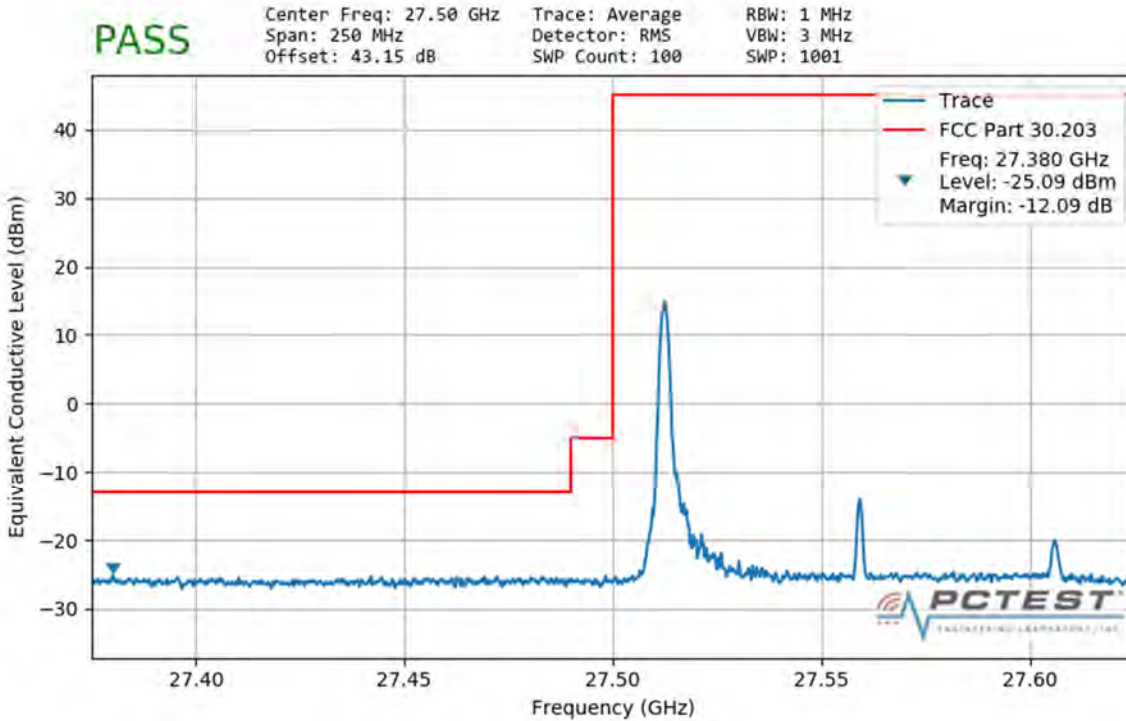


**Plot 7-274. Ant4 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 241 of 286

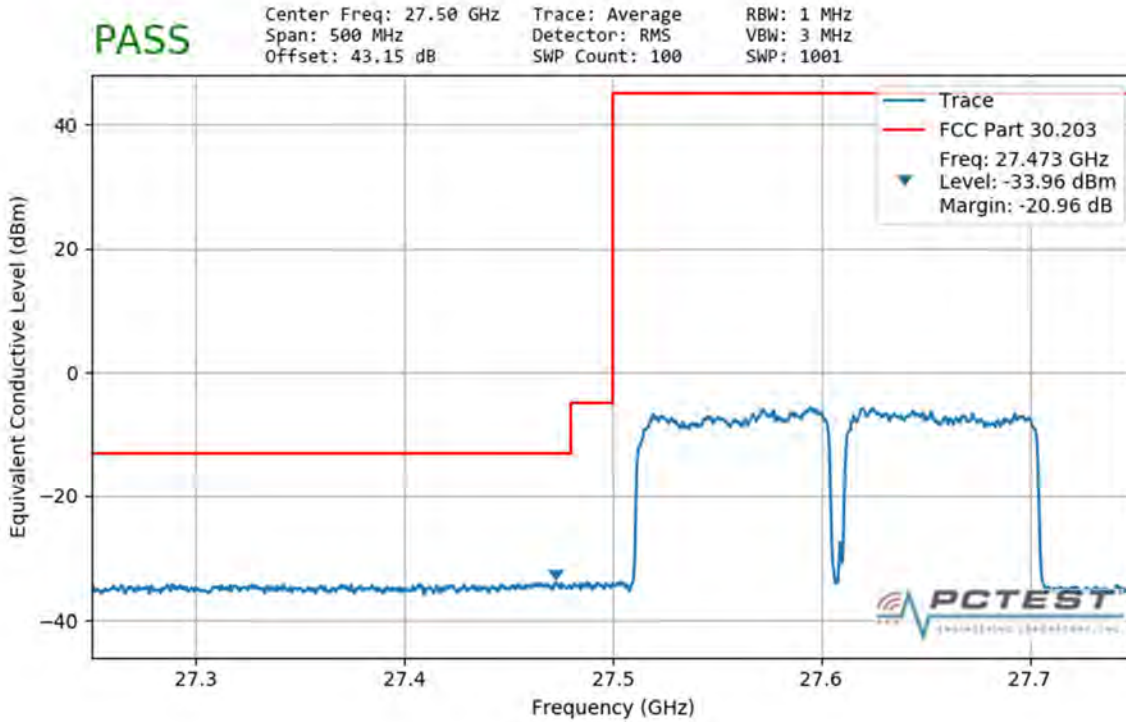


**Plot 7-275. Ant4 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

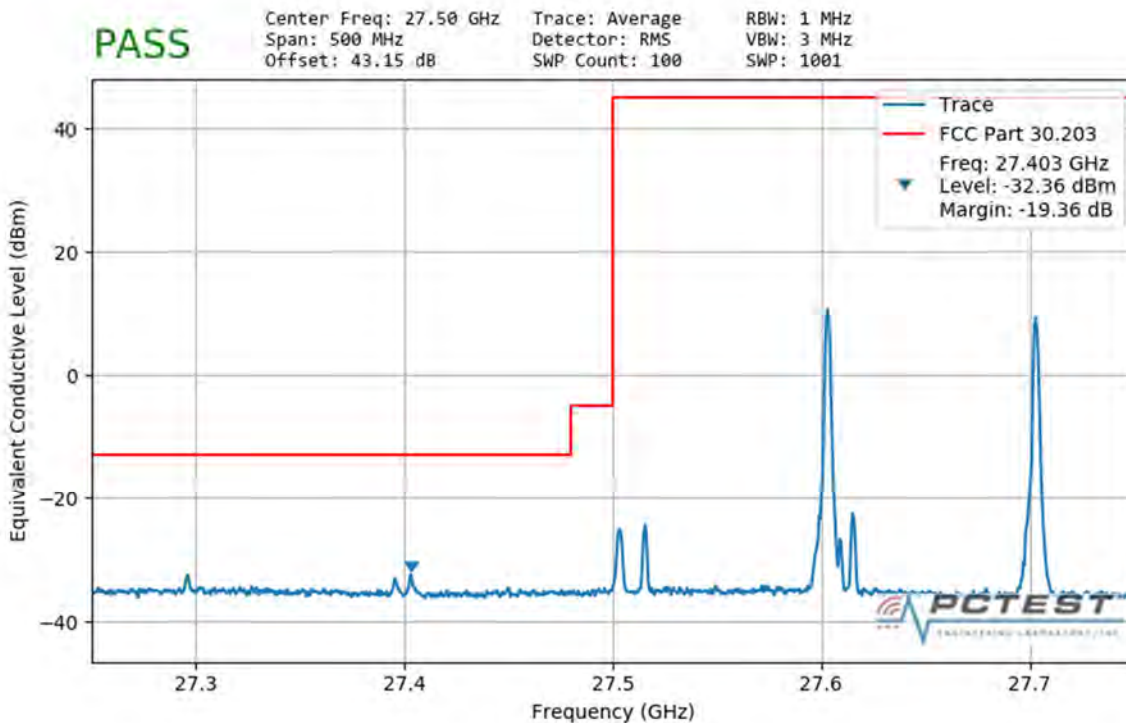


**Plot 7-276. Ant4 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 242 of 286



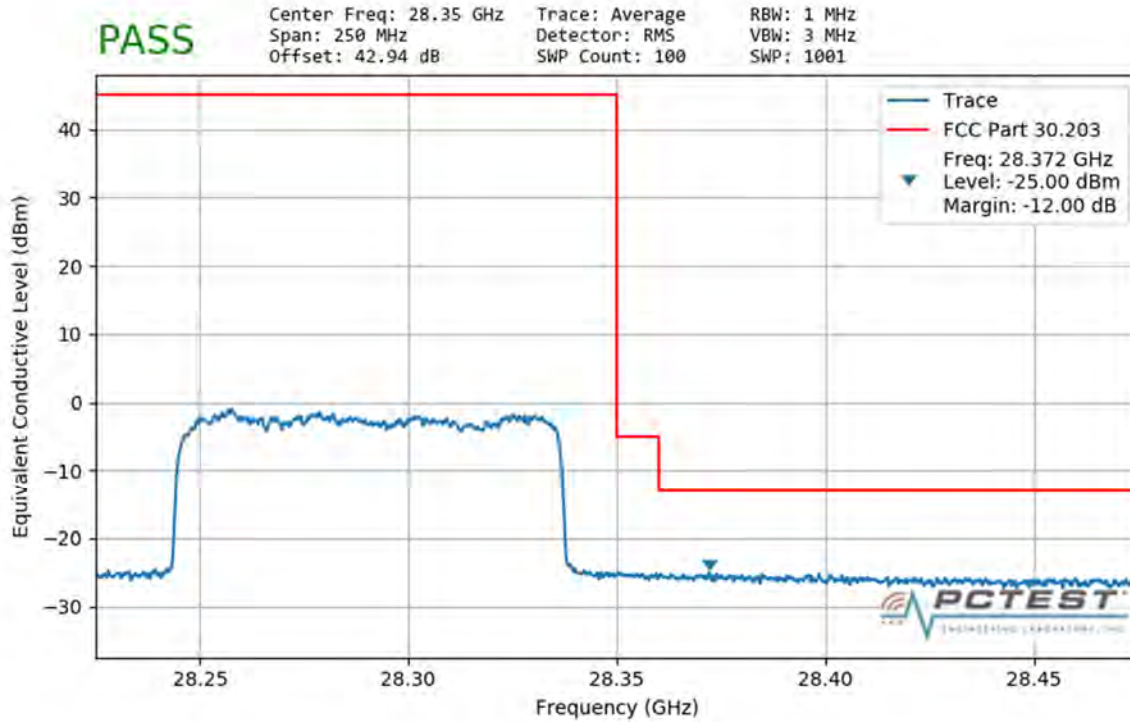


**Plot 7-277. Ant4 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

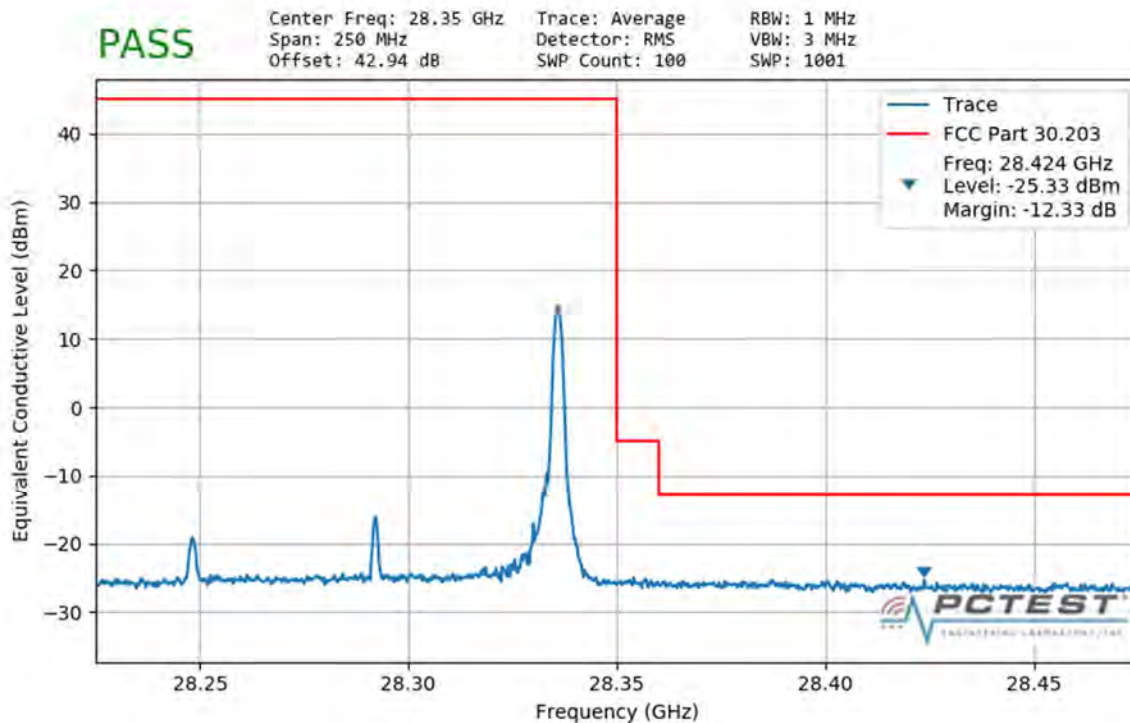


**Plot 7-278. Ant4 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 243 of 286

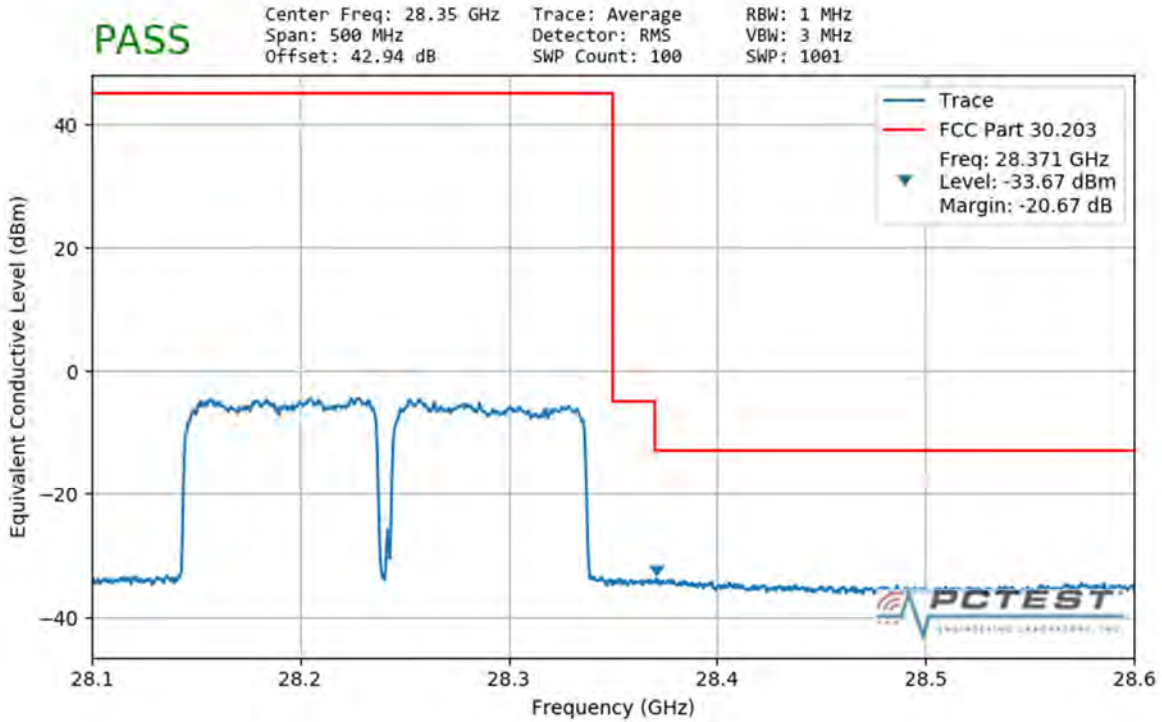


**Plot 7-279. Ant4 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

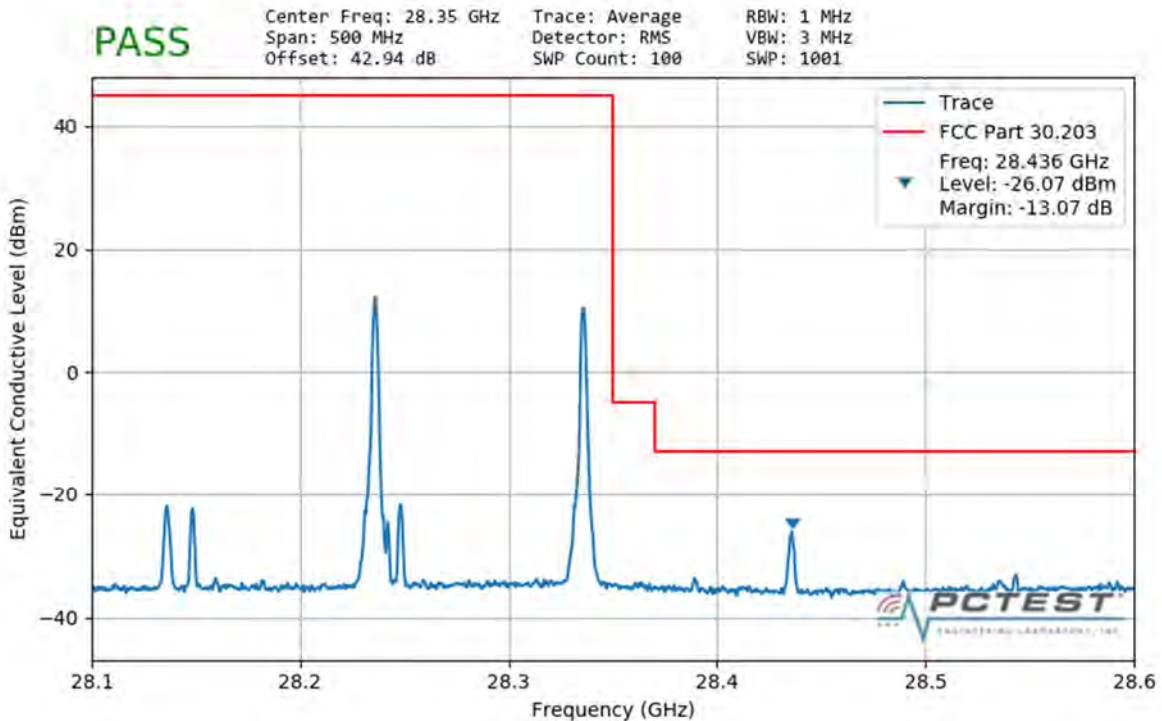


**Plot 7-280. Ant4 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 244 of 286

**Band n260 - MIMO**

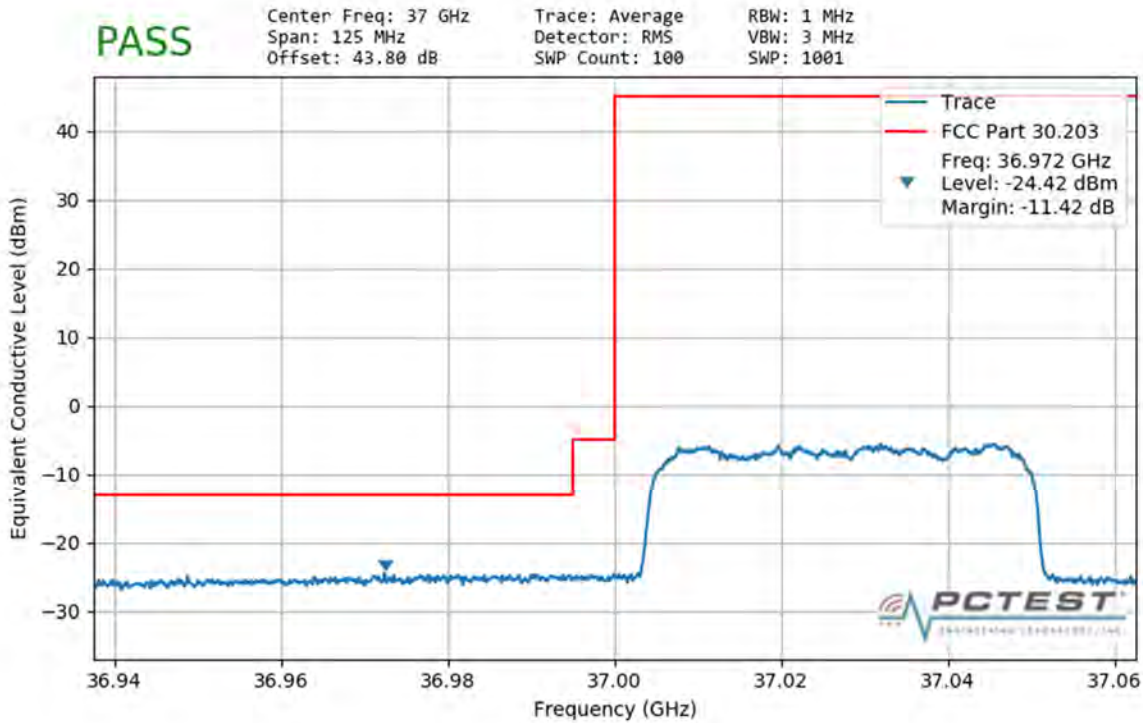


**Plot 7-281. Ant1 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

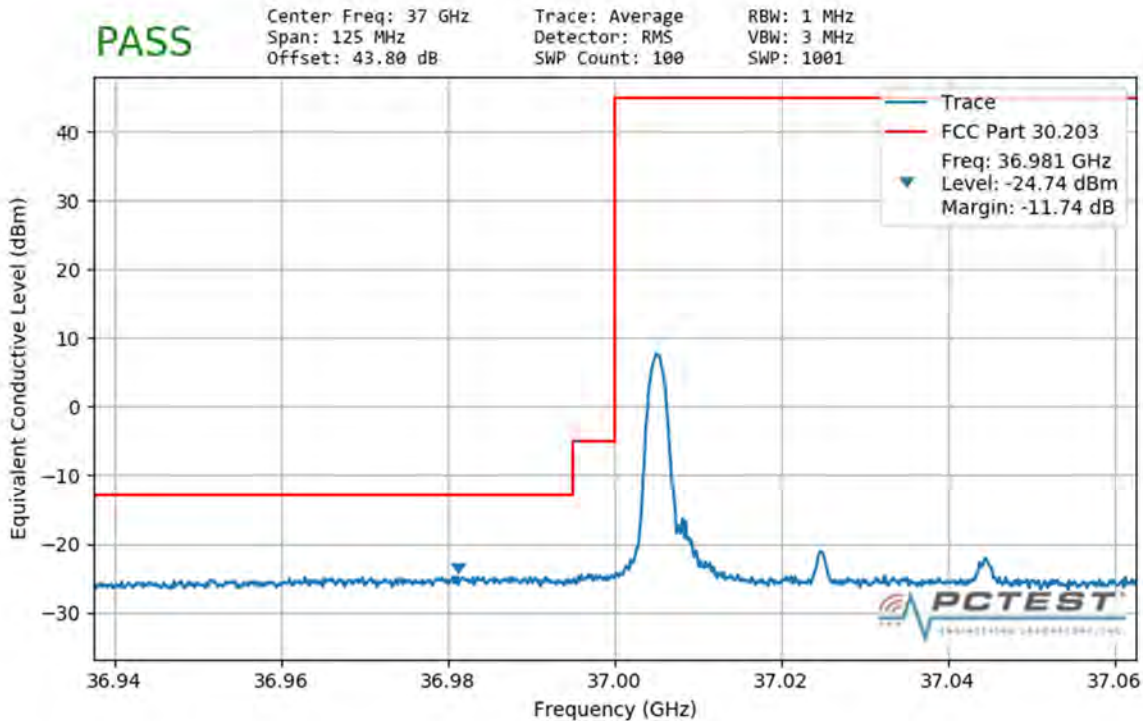


**Plot 7-282. Ant1 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 245 of 286

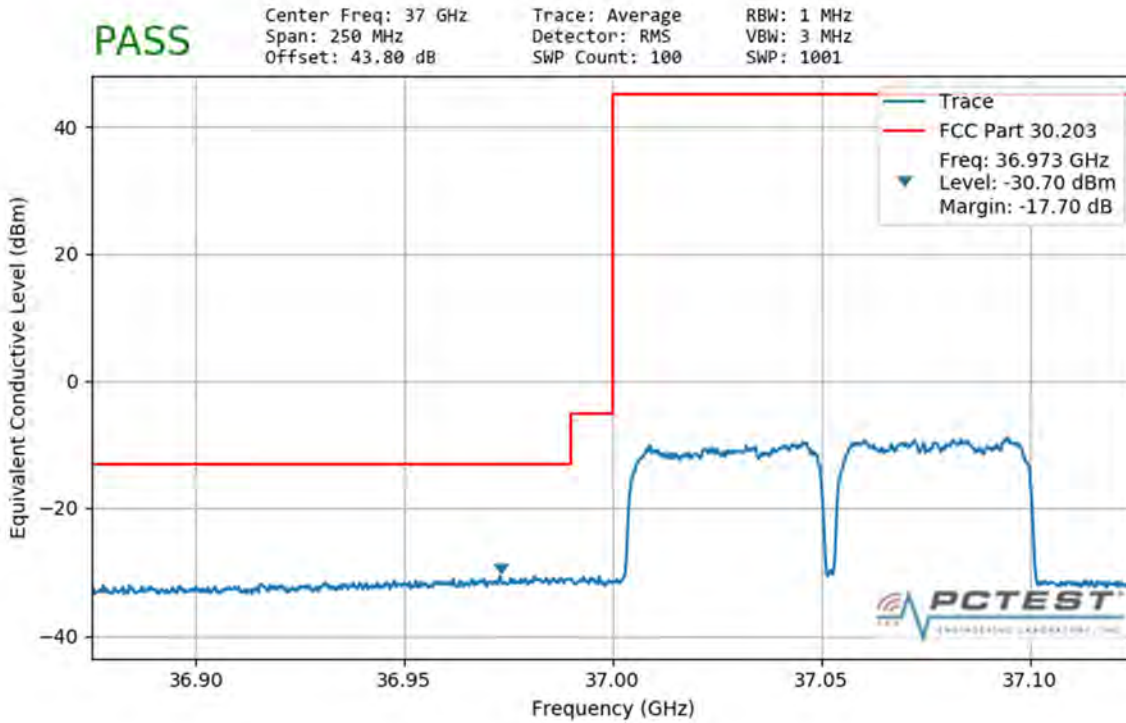


**Plot 7-283. Ant1 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

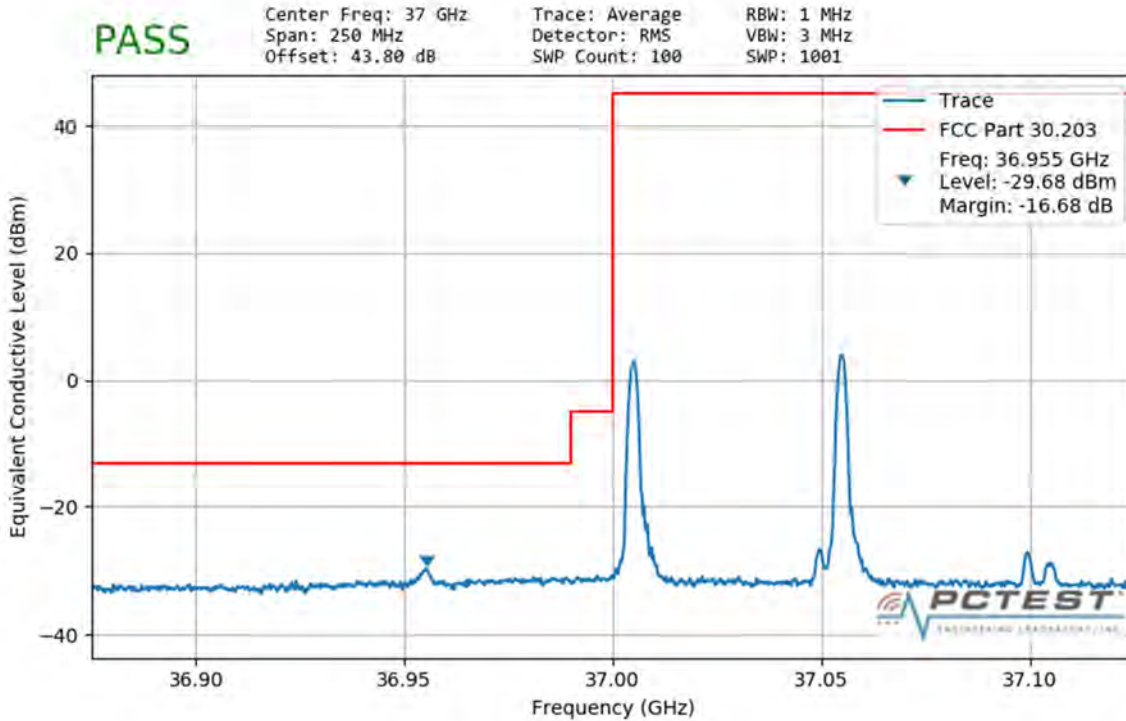


**Plot 7-284. Ant1 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset			Page 246 of 286

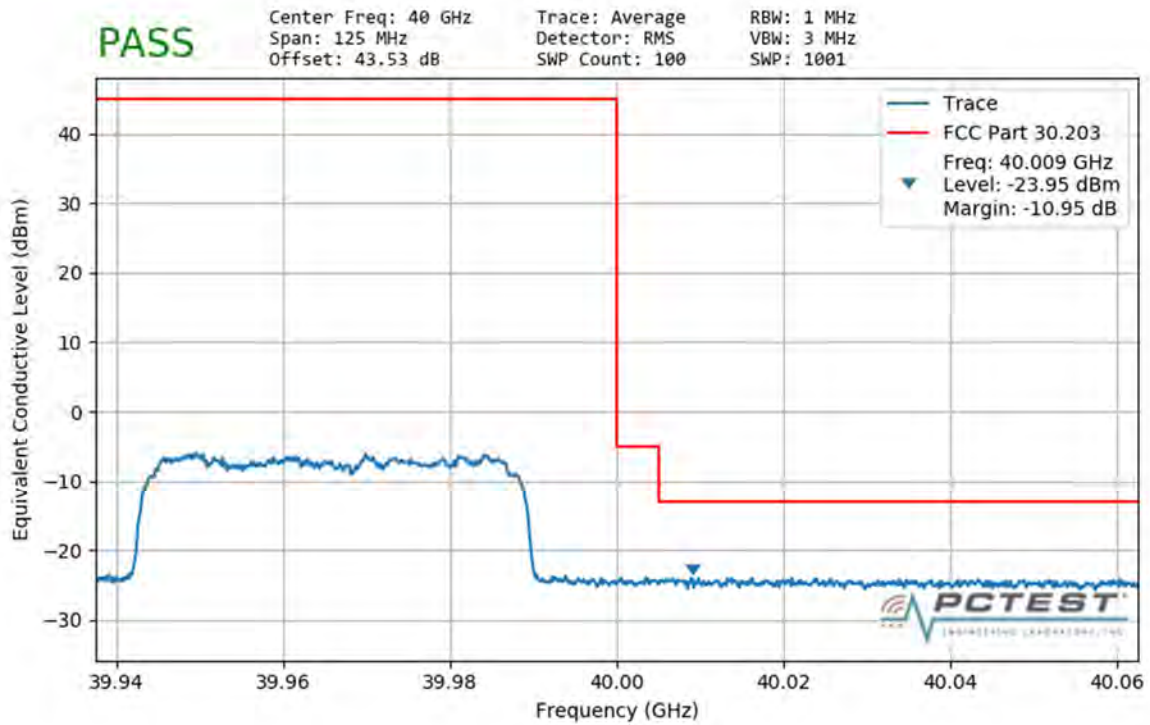


**Plot 7-285. Ant1 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

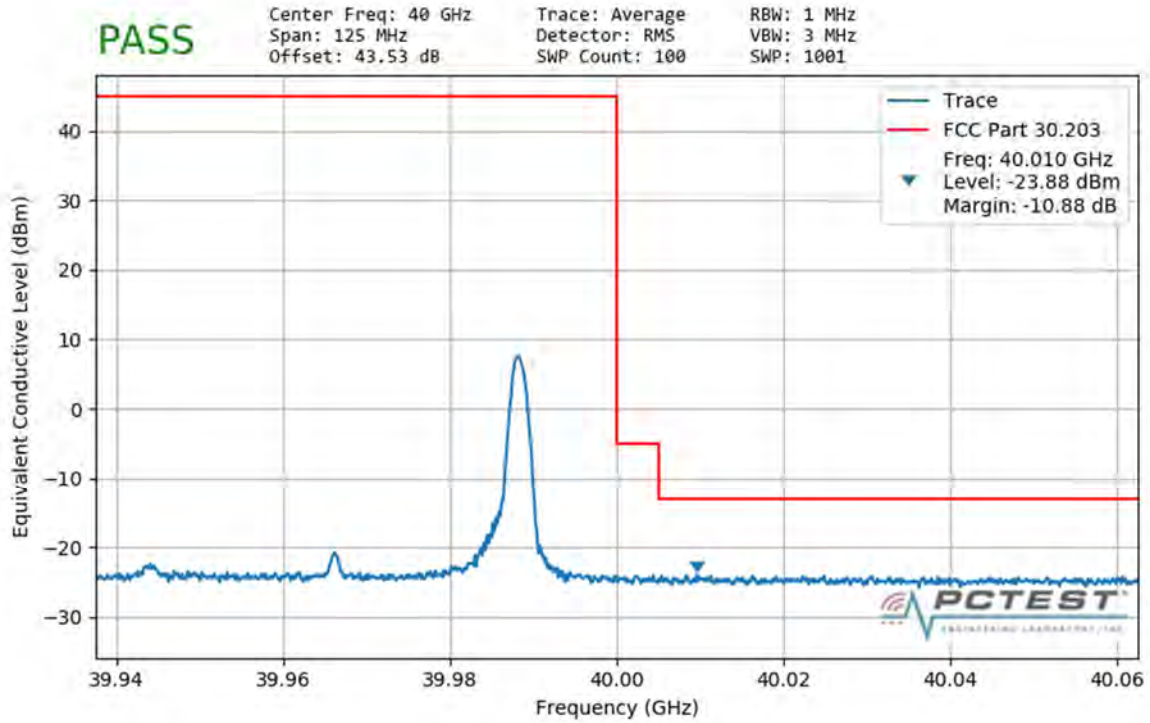


**Plot 7-286. Ant1 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 247 of 286

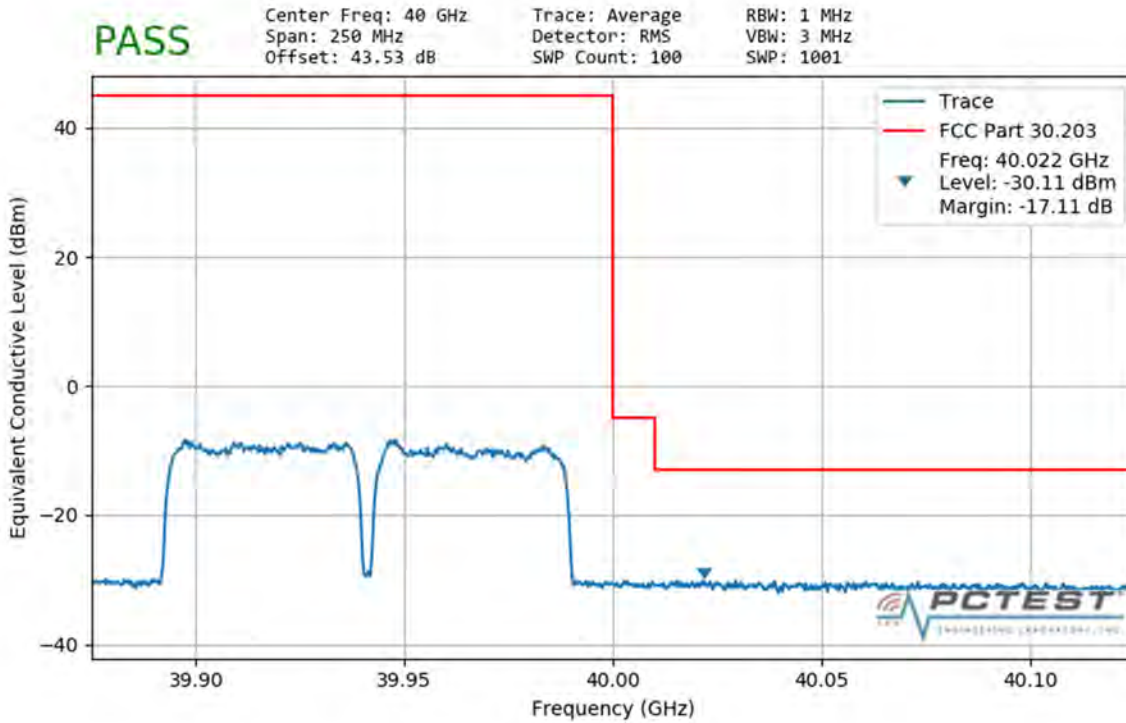


**Plot 7-287. Ant1 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

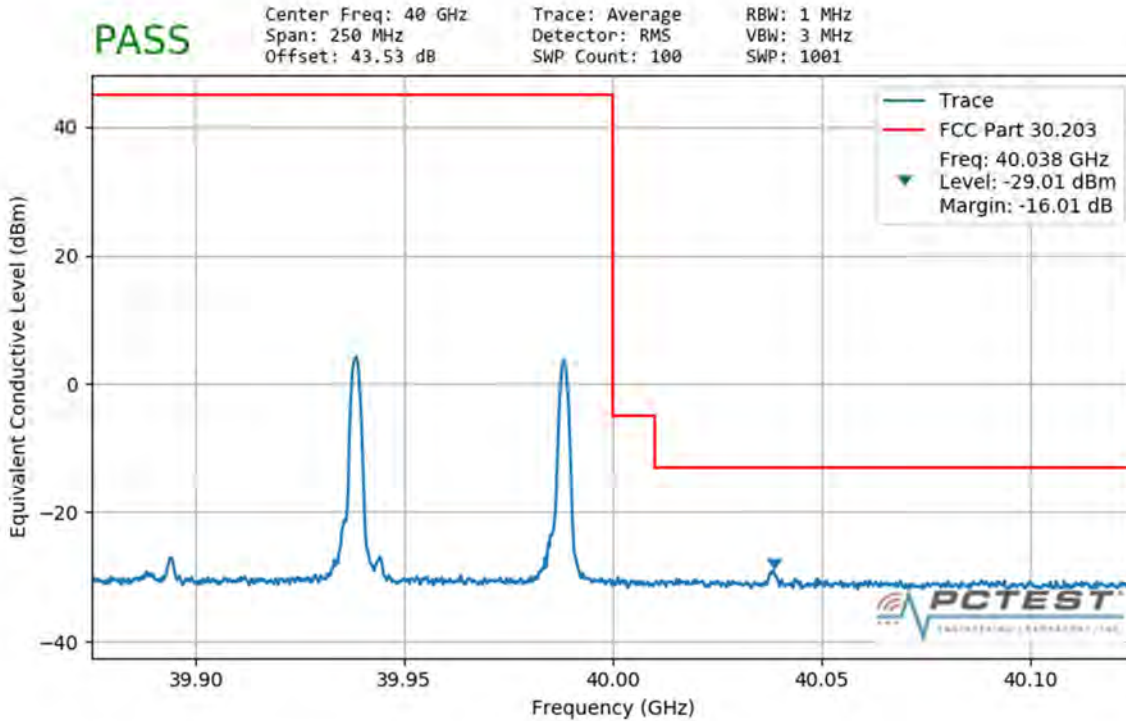


**Plot 7-288. Ant1 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 248 of 286

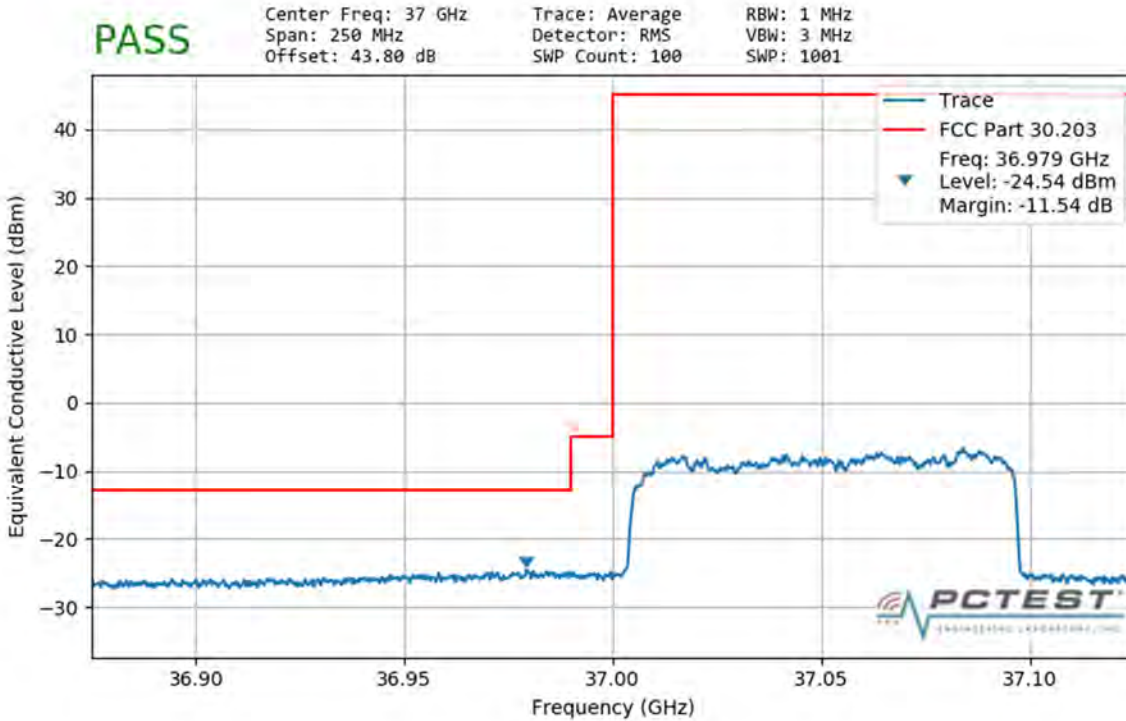


**Plot 7-289. Ant1 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

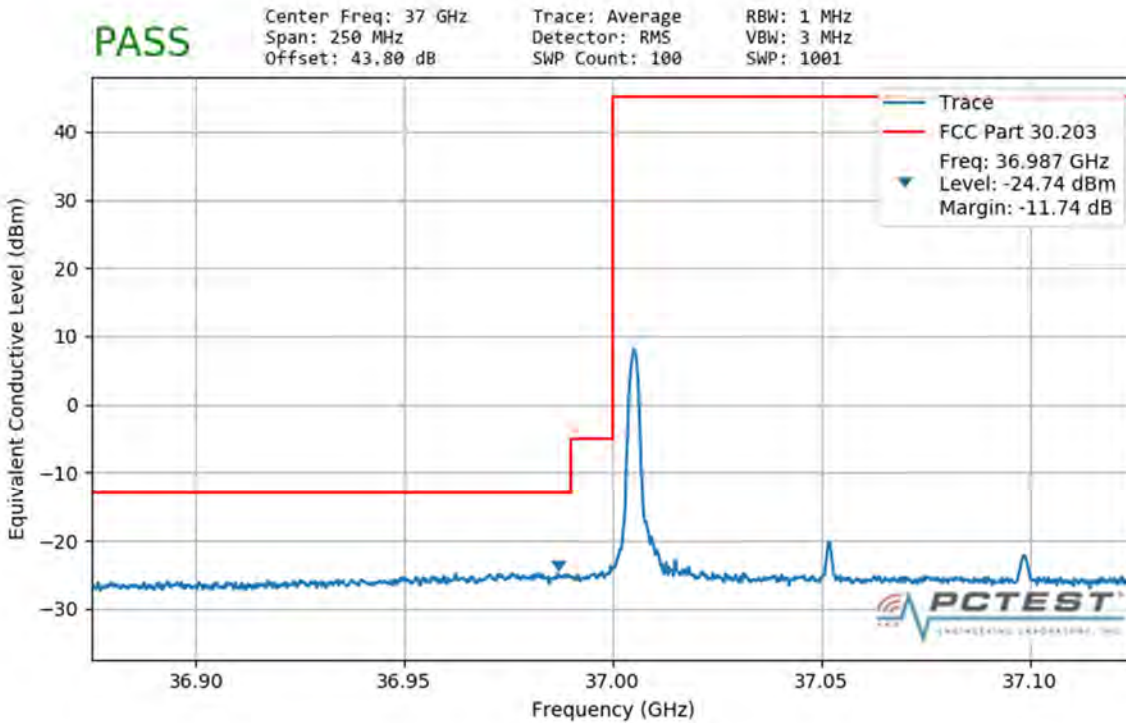


**Plot 7-290. Ant1 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 249 of 286

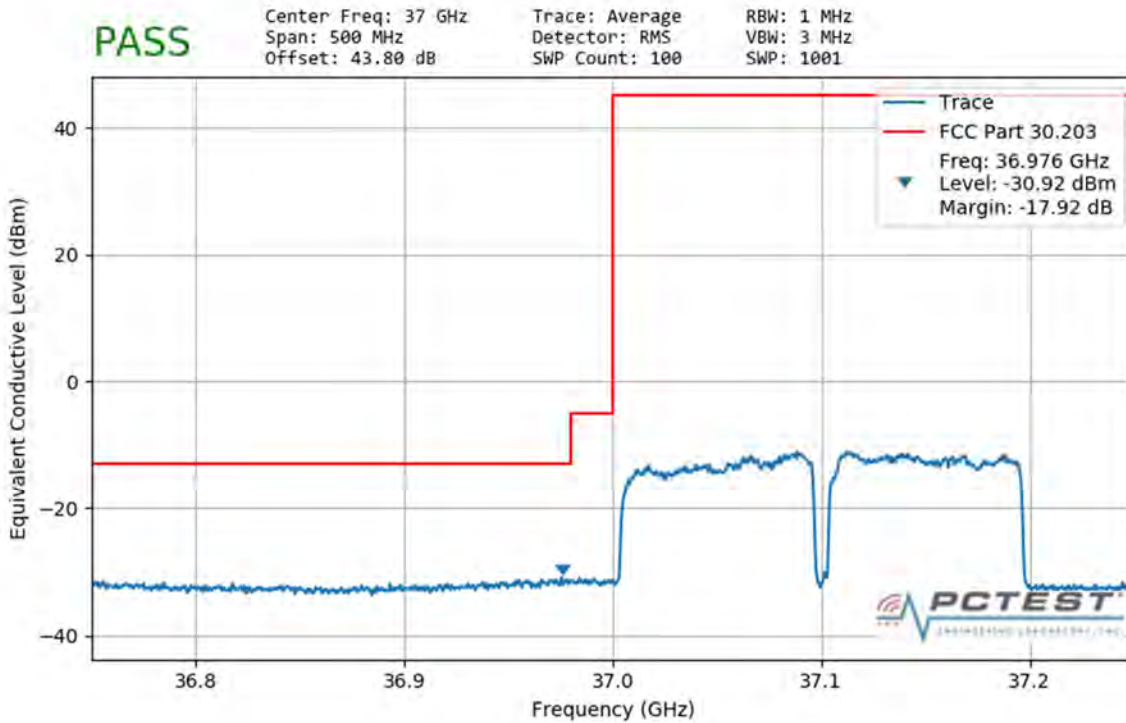


**Plot 7-291. Ant1 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

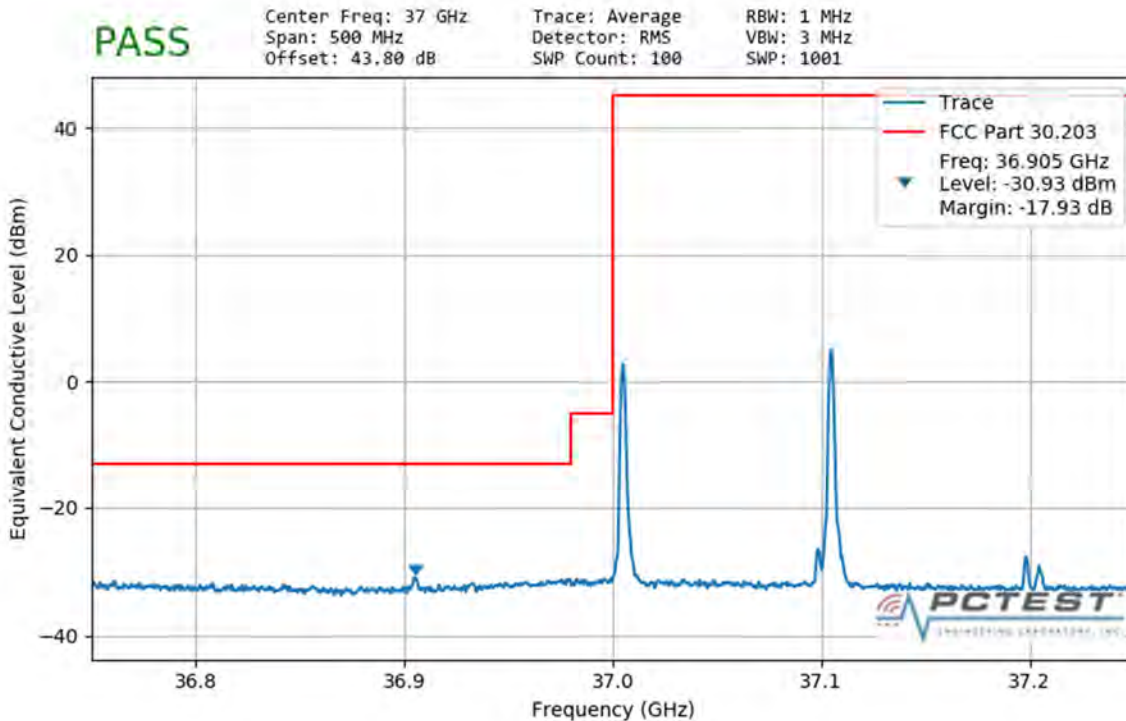


**Plot 7-292. Ant1 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 250 of 286



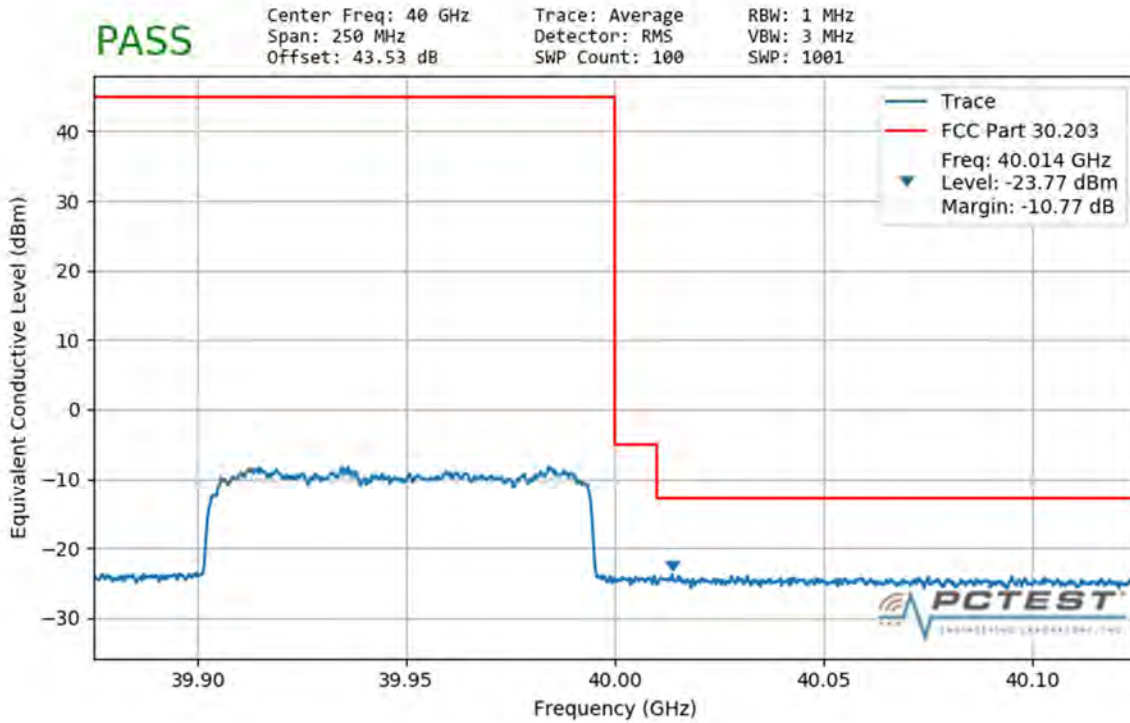


**Plot 7-293. Ant1 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

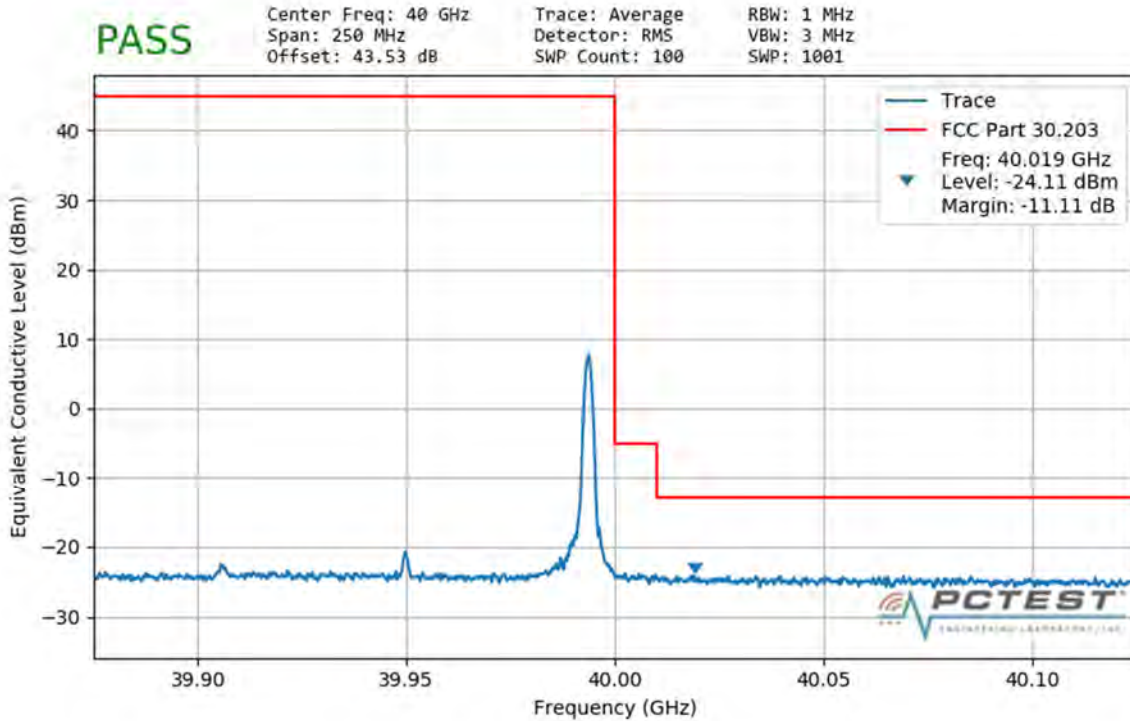


**Plot 7-294. Ant1 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 251 of 286

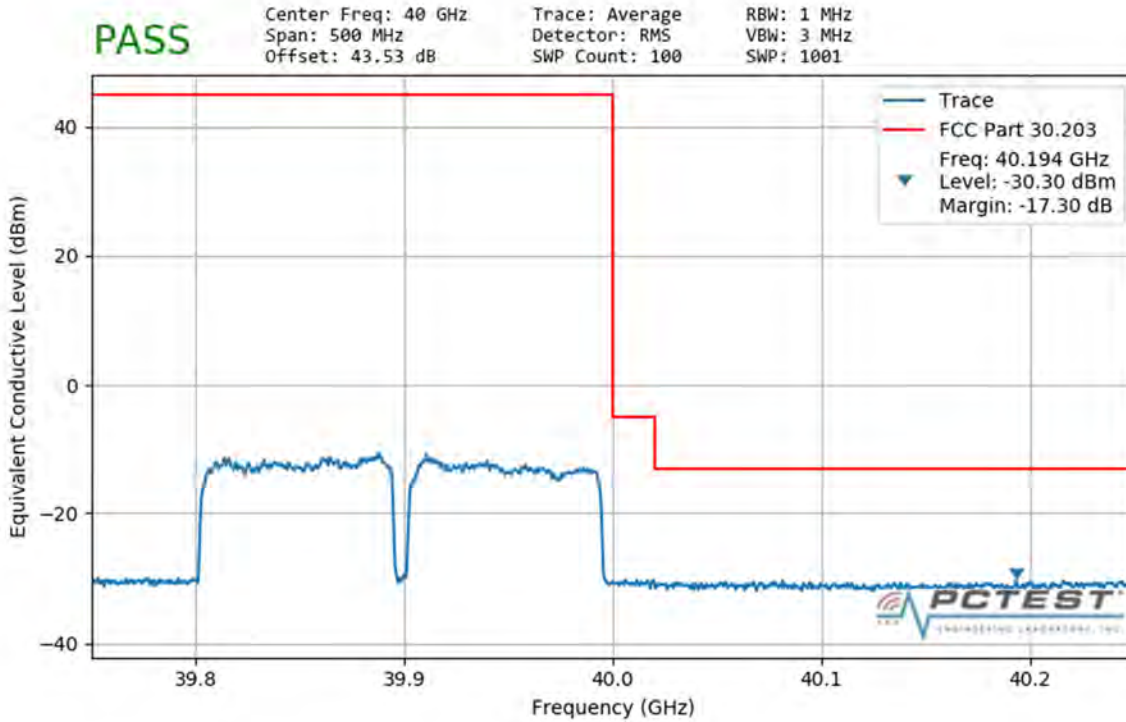


**Plot 7-295. Ant1 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

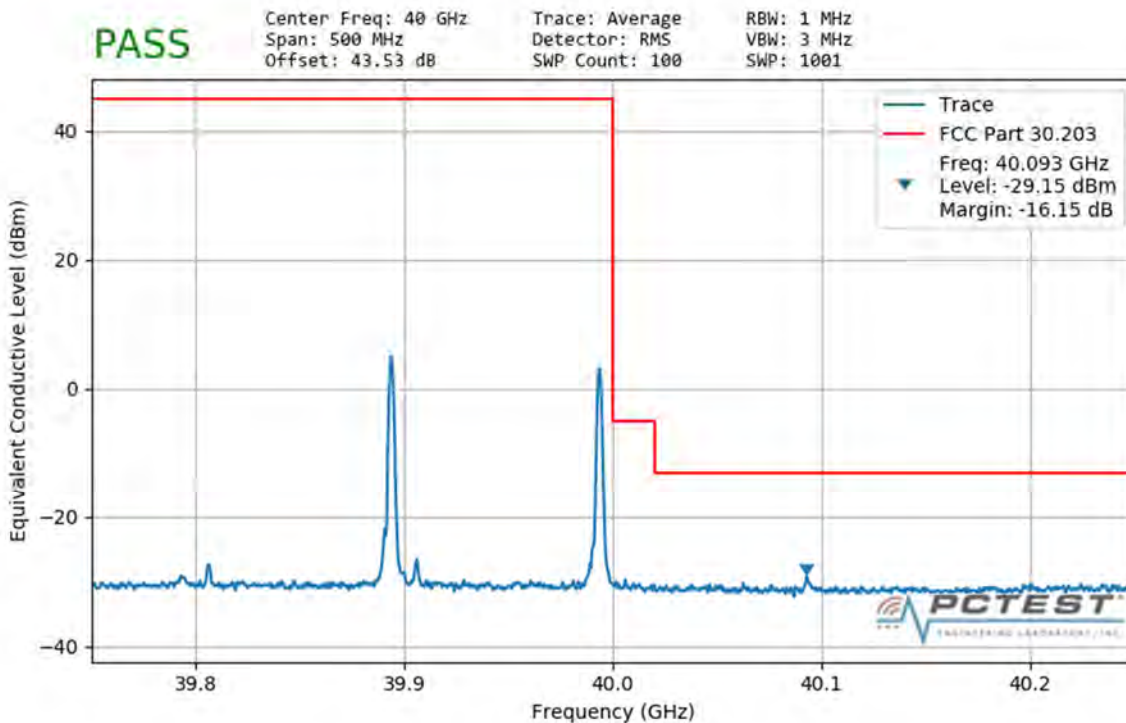


**Plot 7-296. Ant1 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 252 of 286

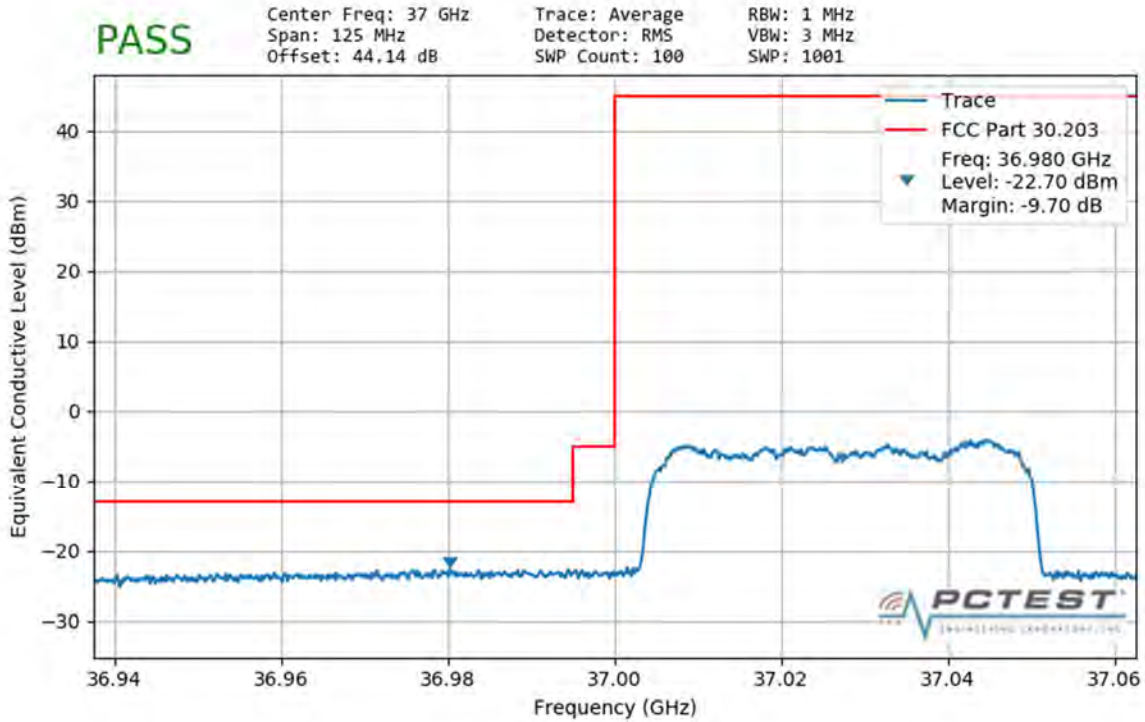


**Plot 7-297. Ant2 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

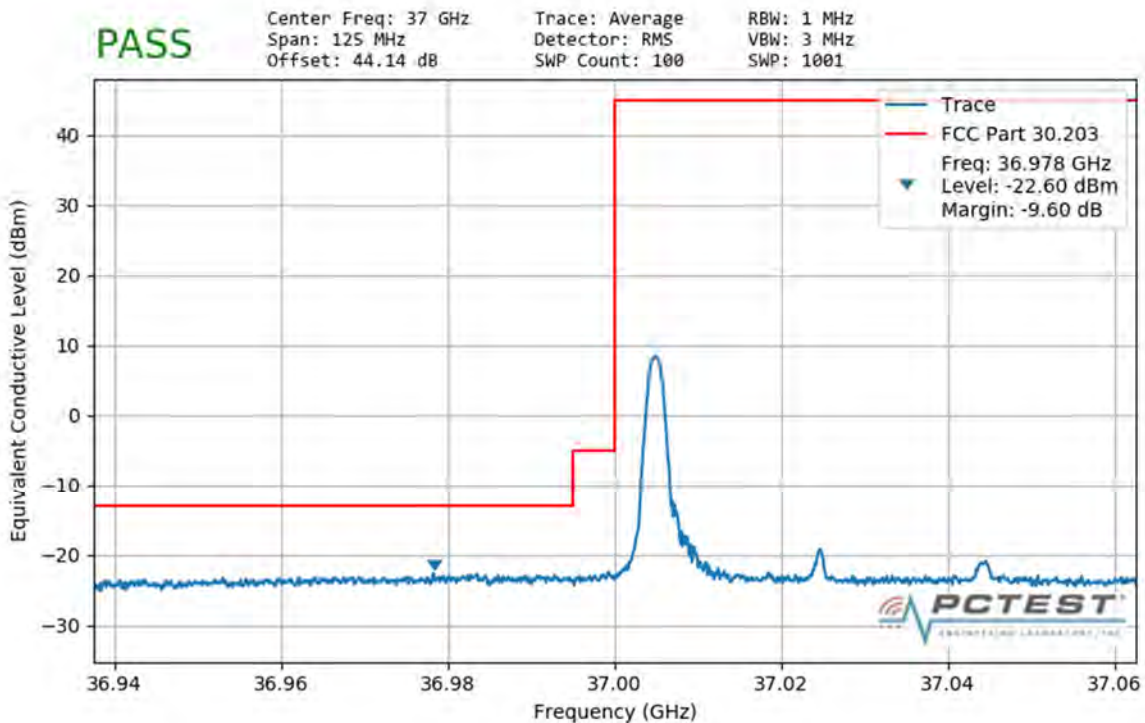


**Plot 7-298. Ant2 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 253 of 286

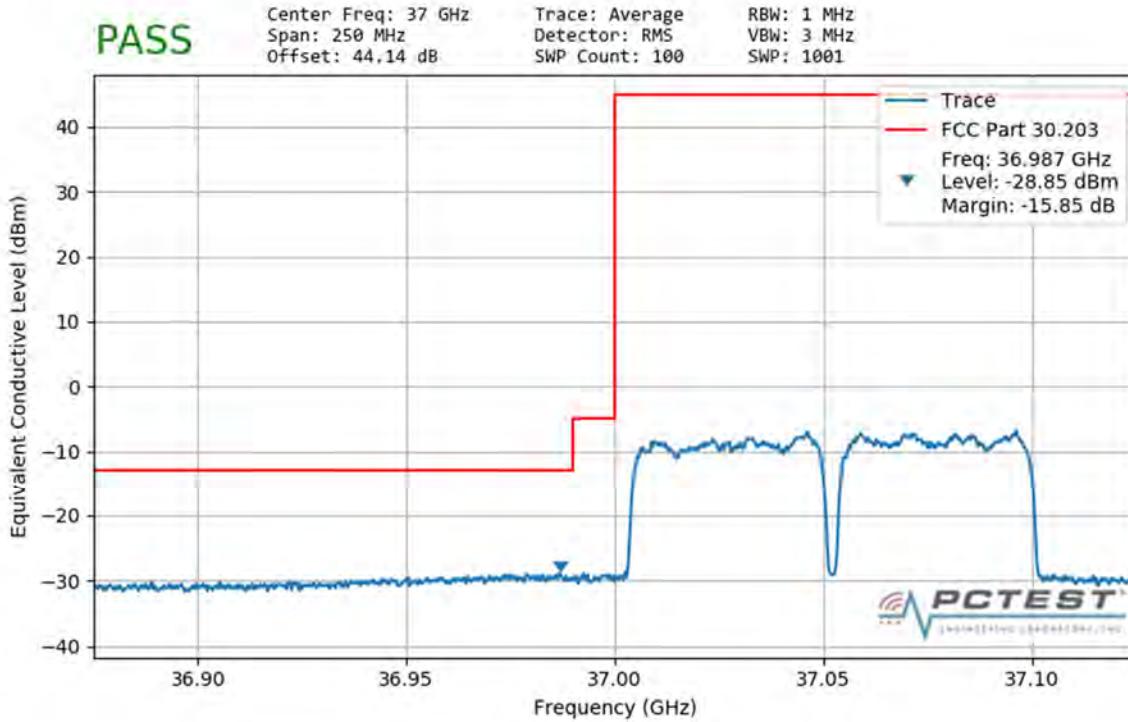


**Plot 7-299. Ant2 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

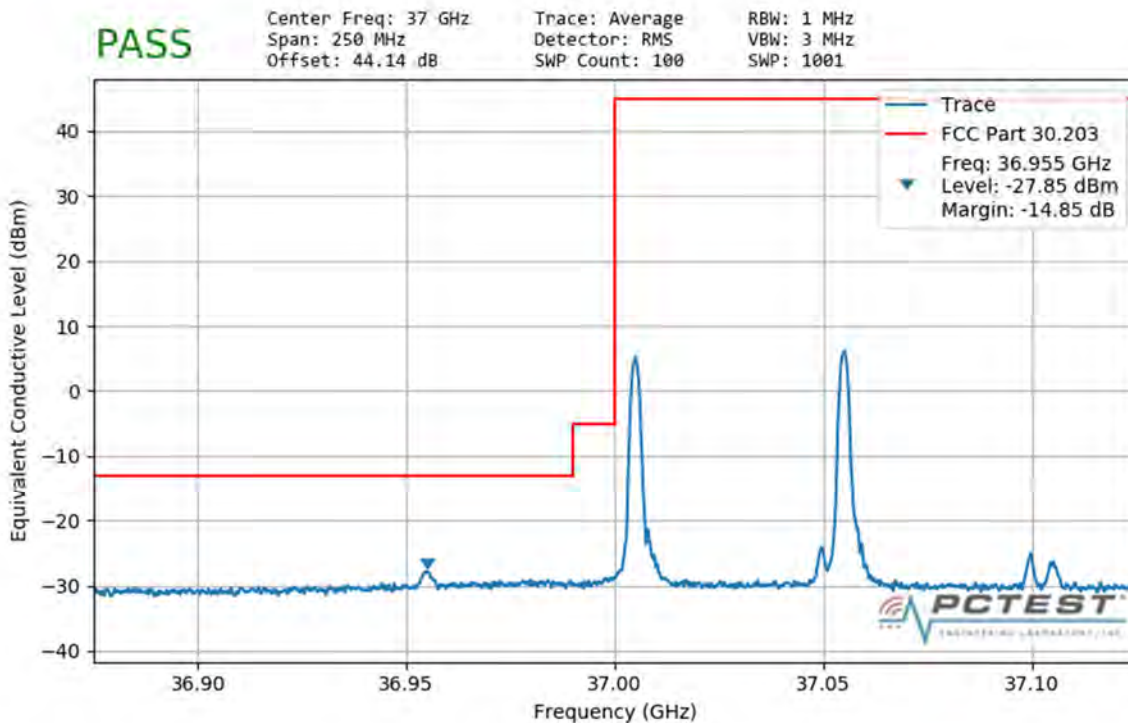


**Plot 7-300. Ant2 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 254 of 286

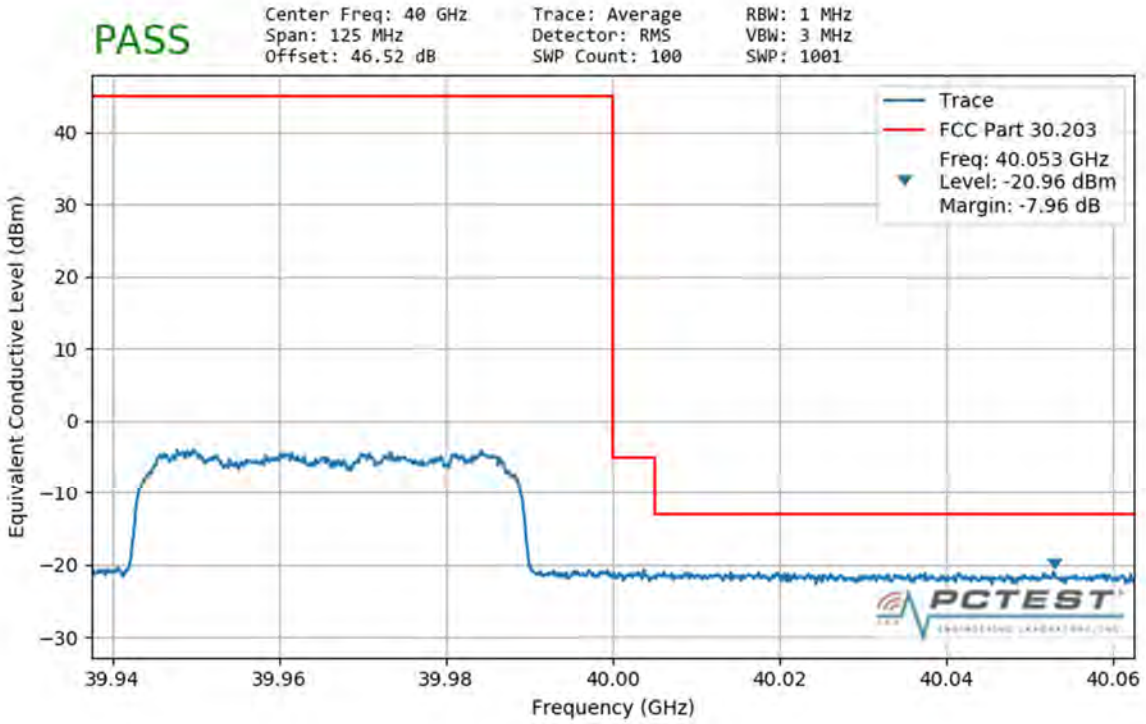


**Plot 7-301. Ant2 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

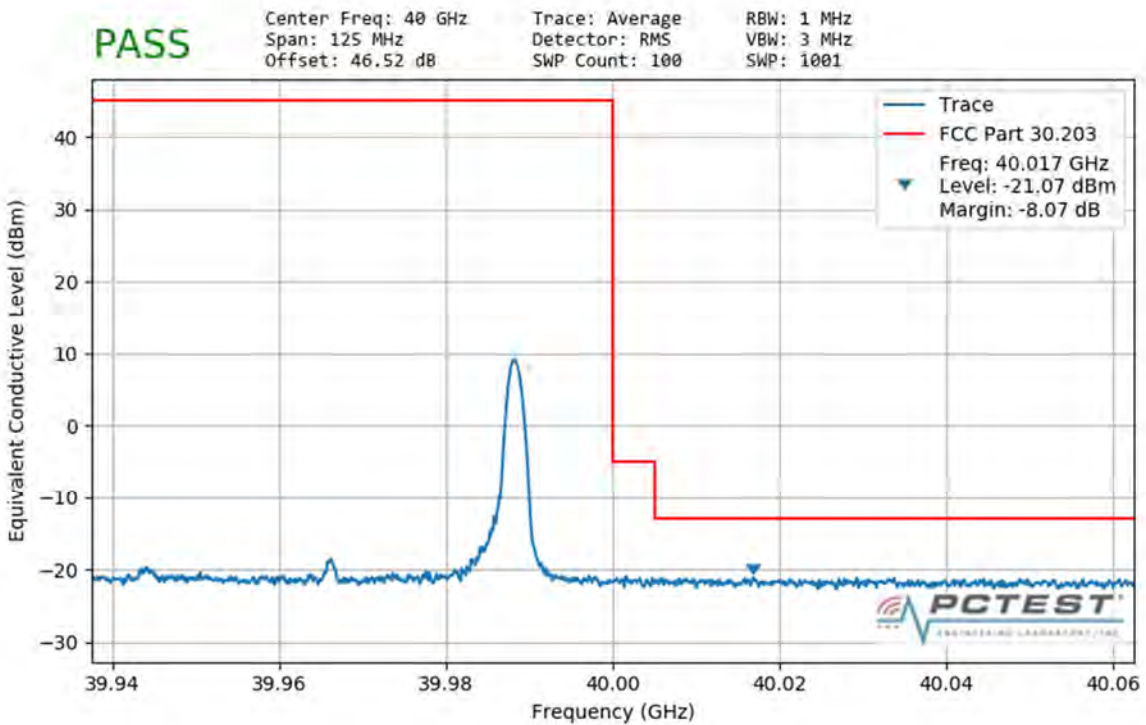


**Plot 7-302. Ant2 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 255 of 286

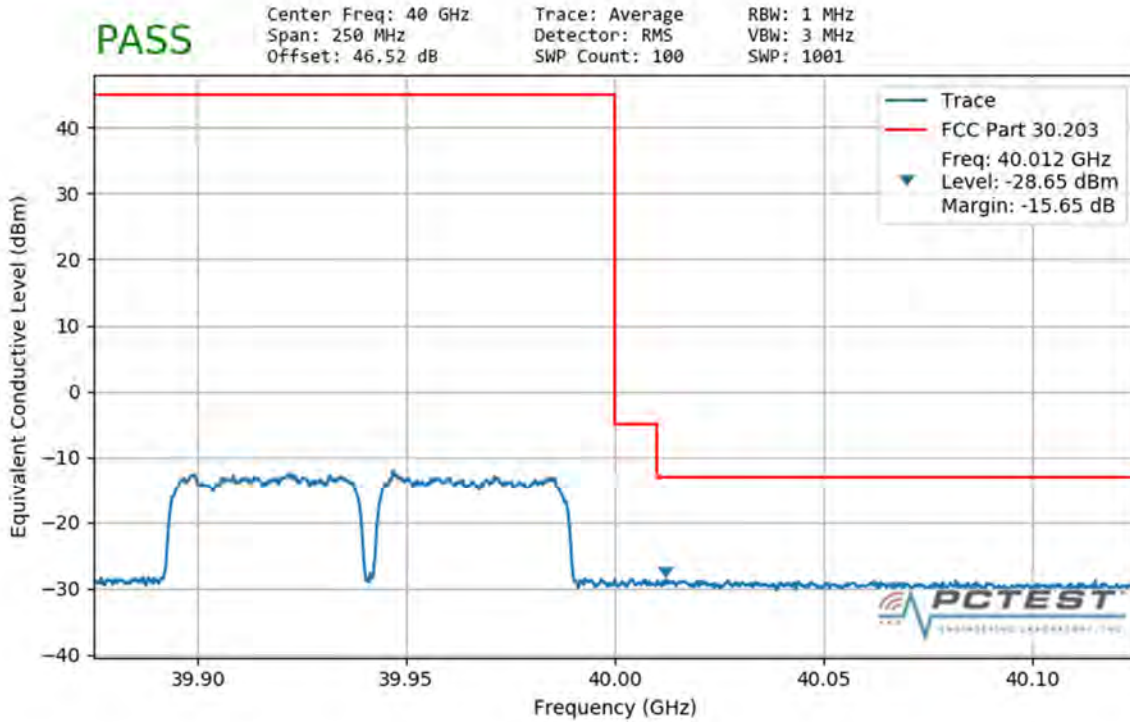


**Plot 7-303. Ant2 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

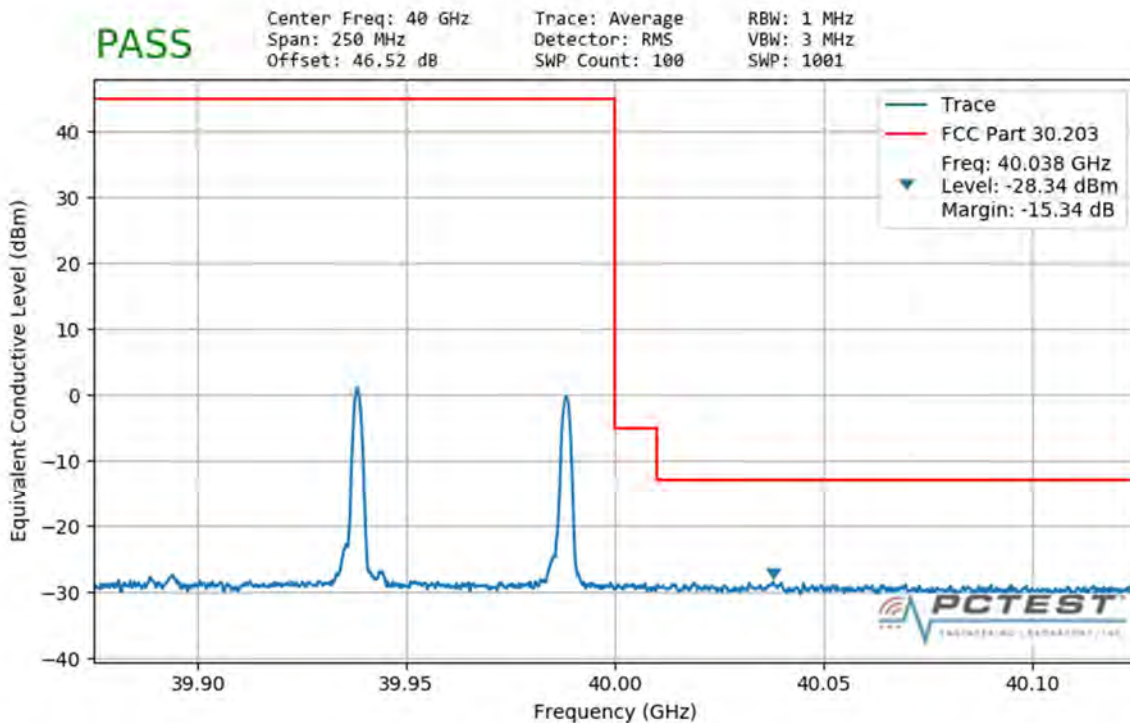


**Plot 7-304. Ant2 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 256 of 286

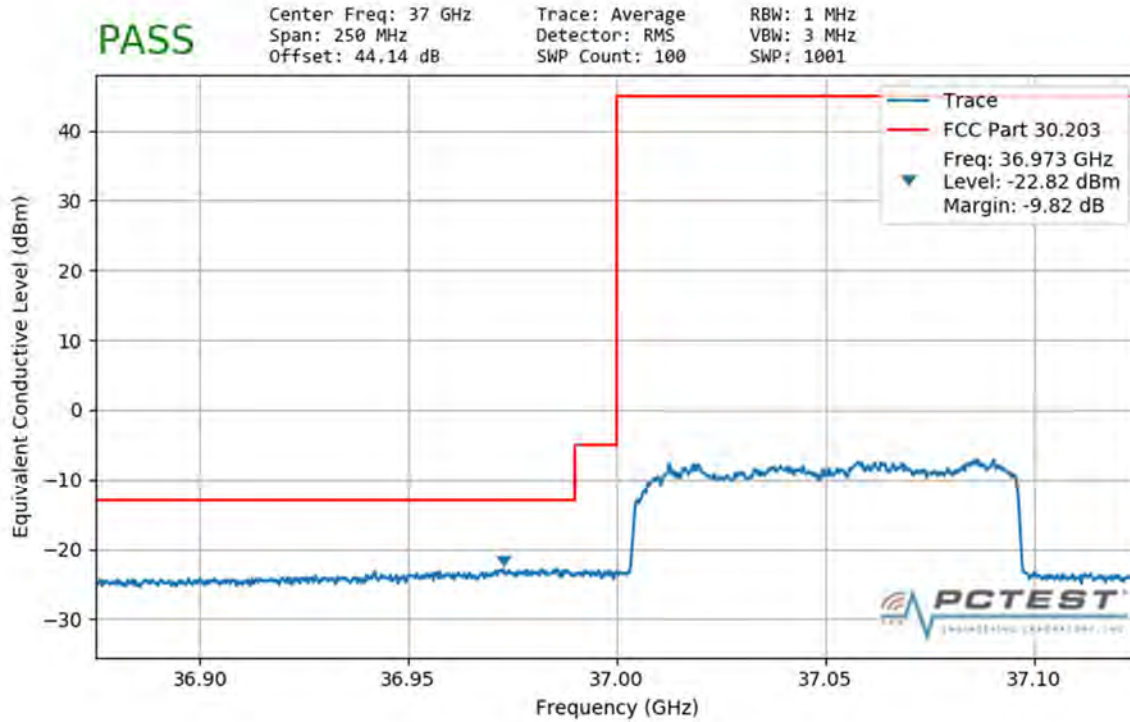


**Plot 7-305. Ant2 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

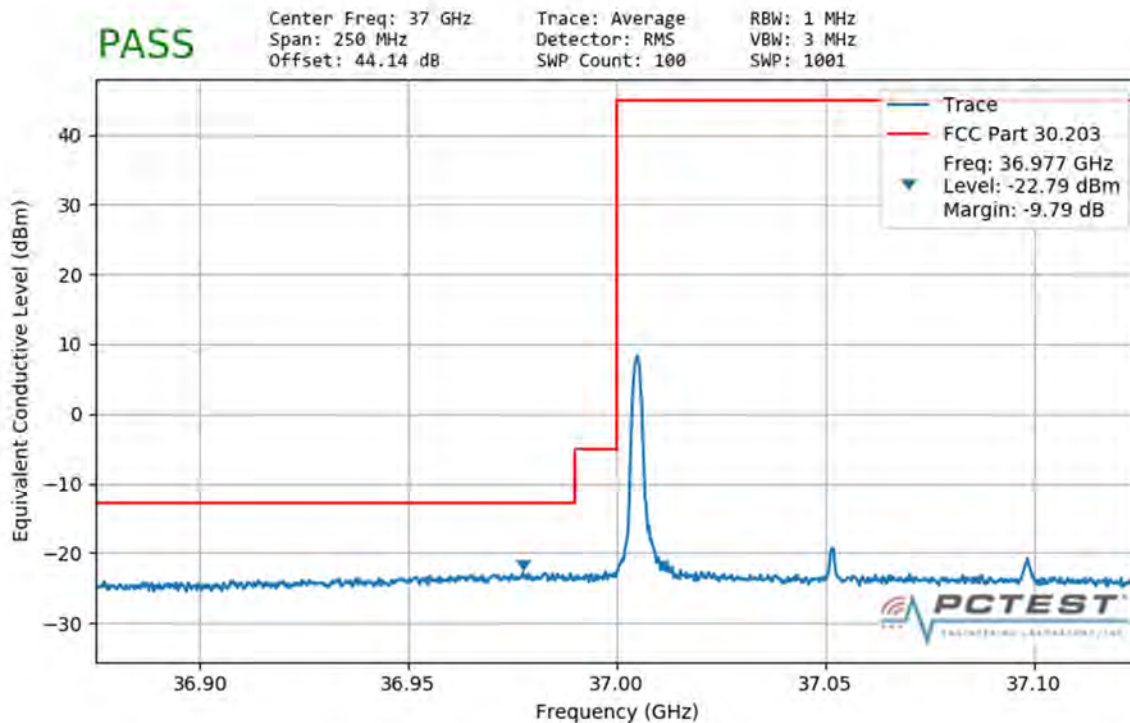


**Plot 7-306. Ant2 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 257 of 286

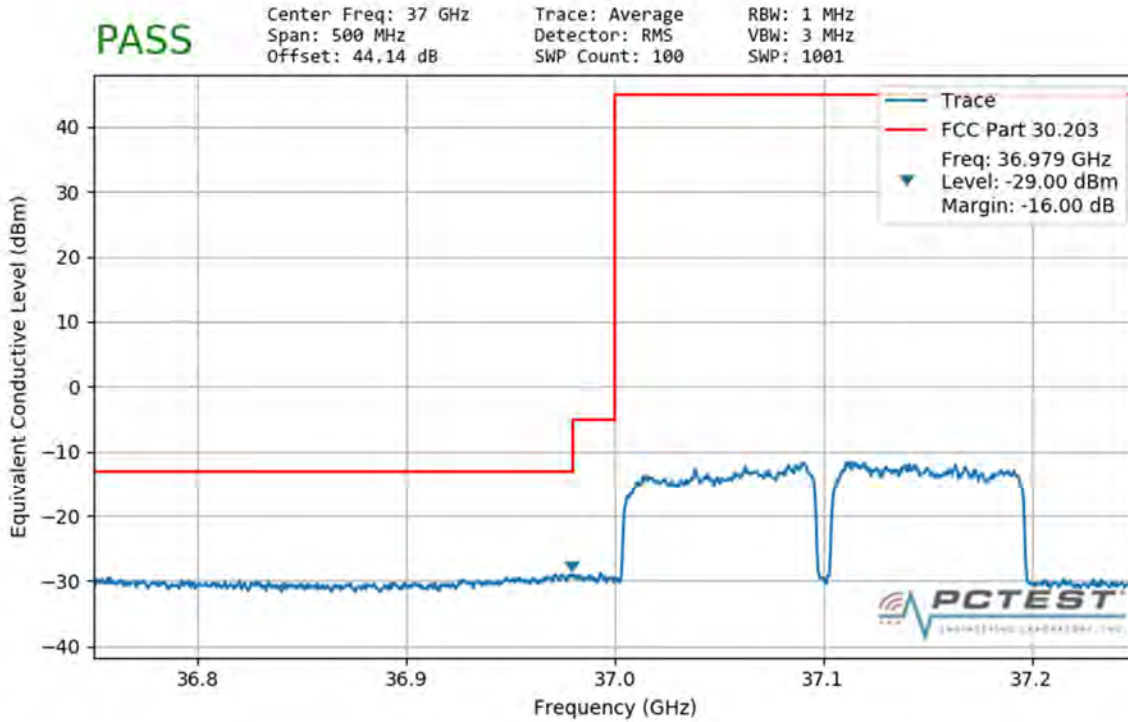


**Plot 7-307. Ant2 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

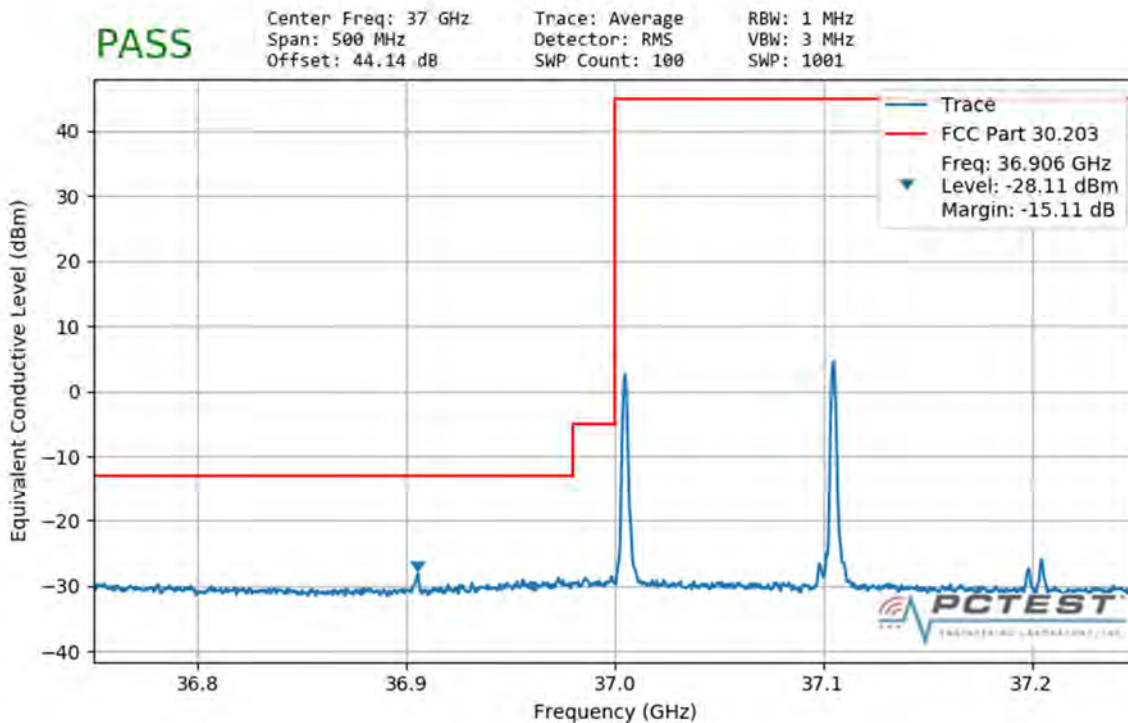


**Plot 7-308. Ant2 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 258 of 286



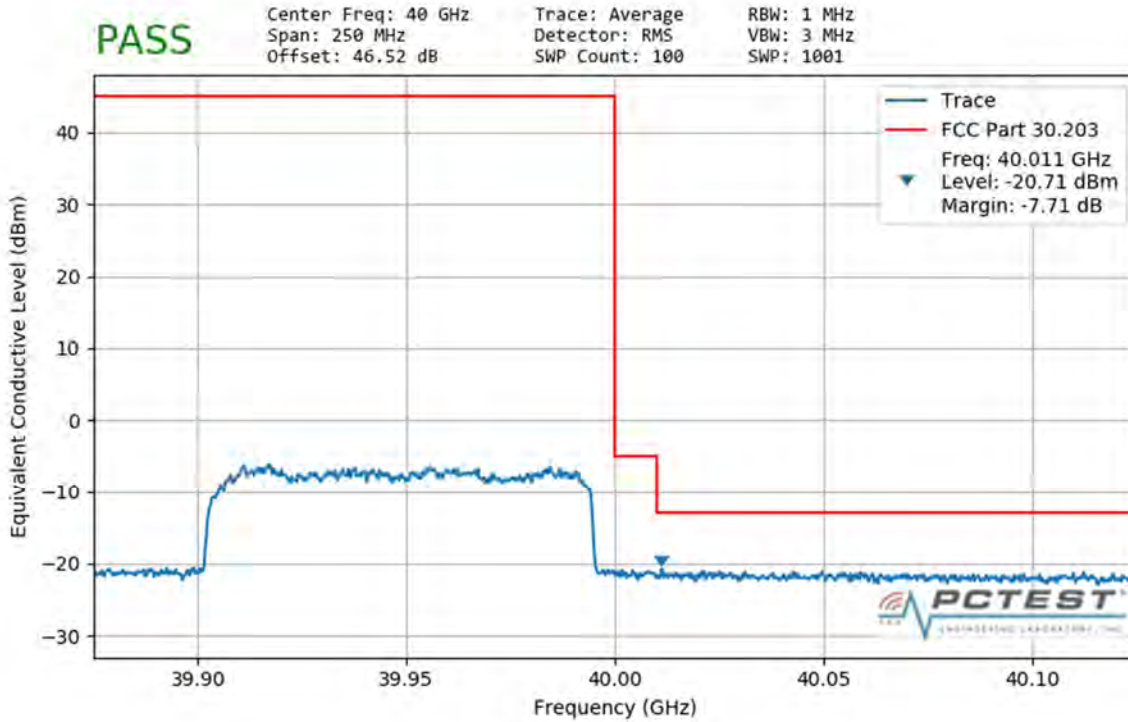


**Plot 7-309. Ant2 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

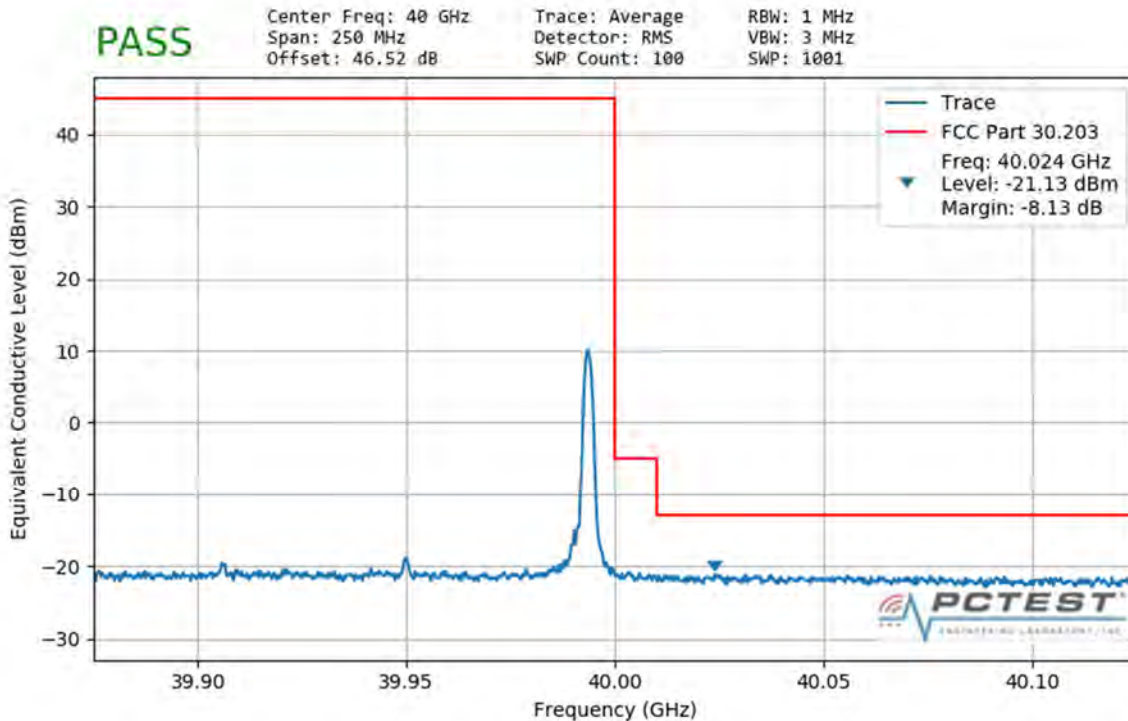


**Plot 7-310. Ant2 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 259 of 286

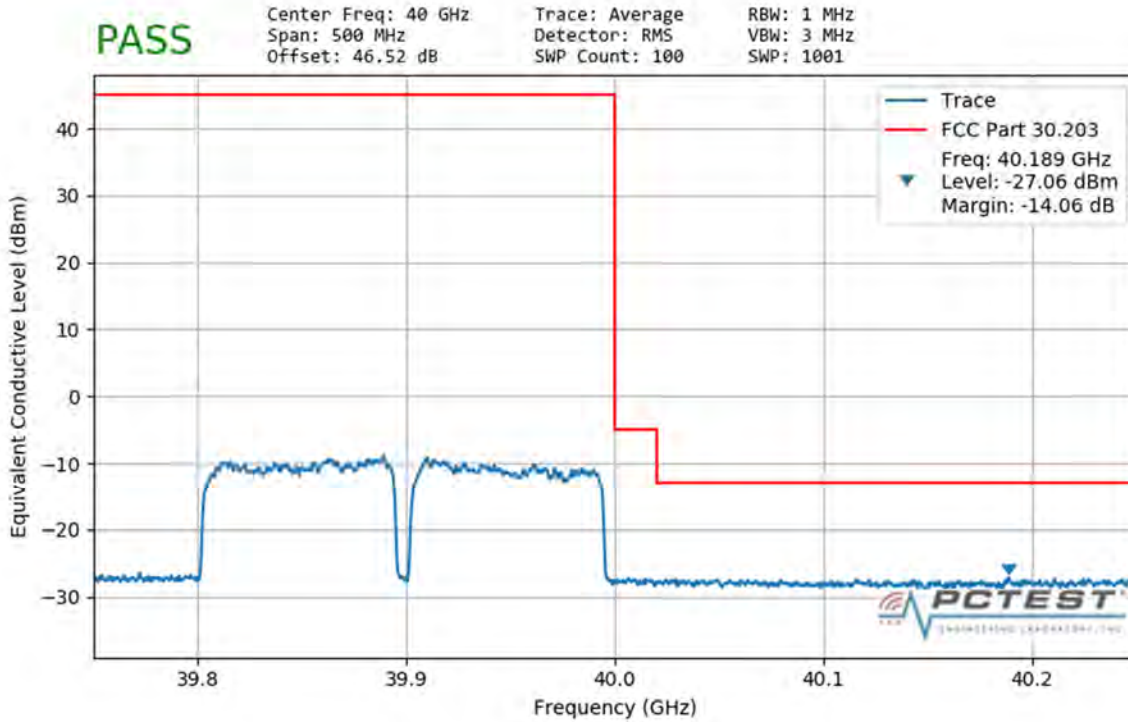


**Plot 7-311. Ant2 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

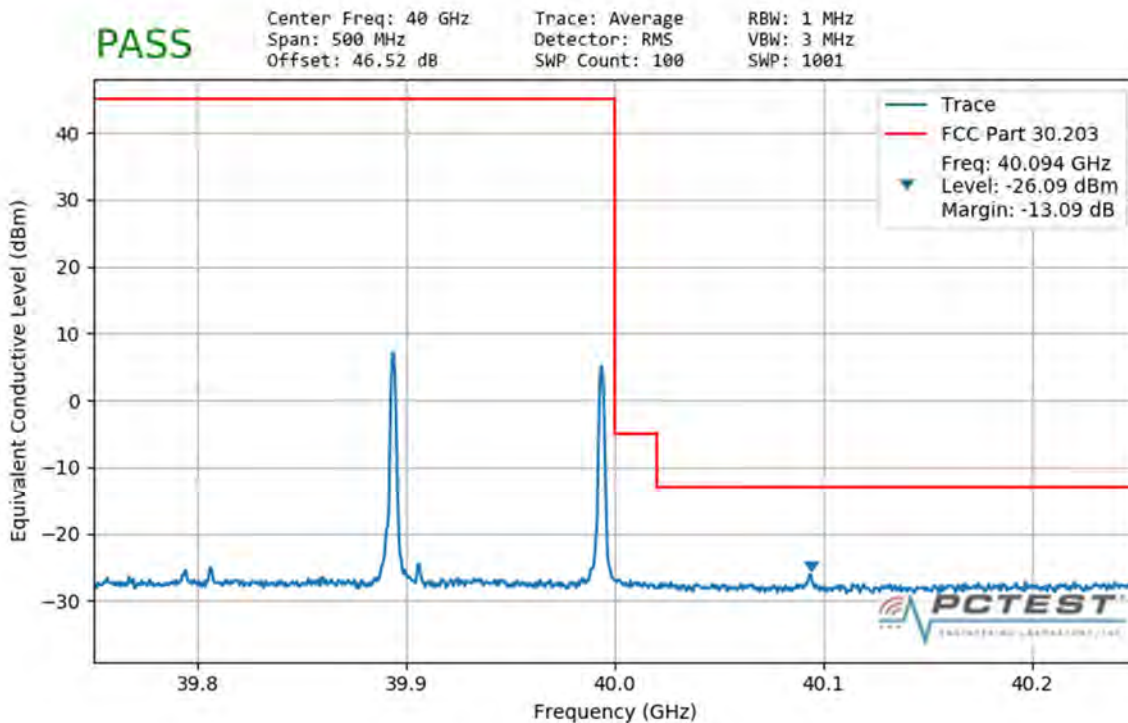


**Plot 7-312. Ant2 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 260 of 286

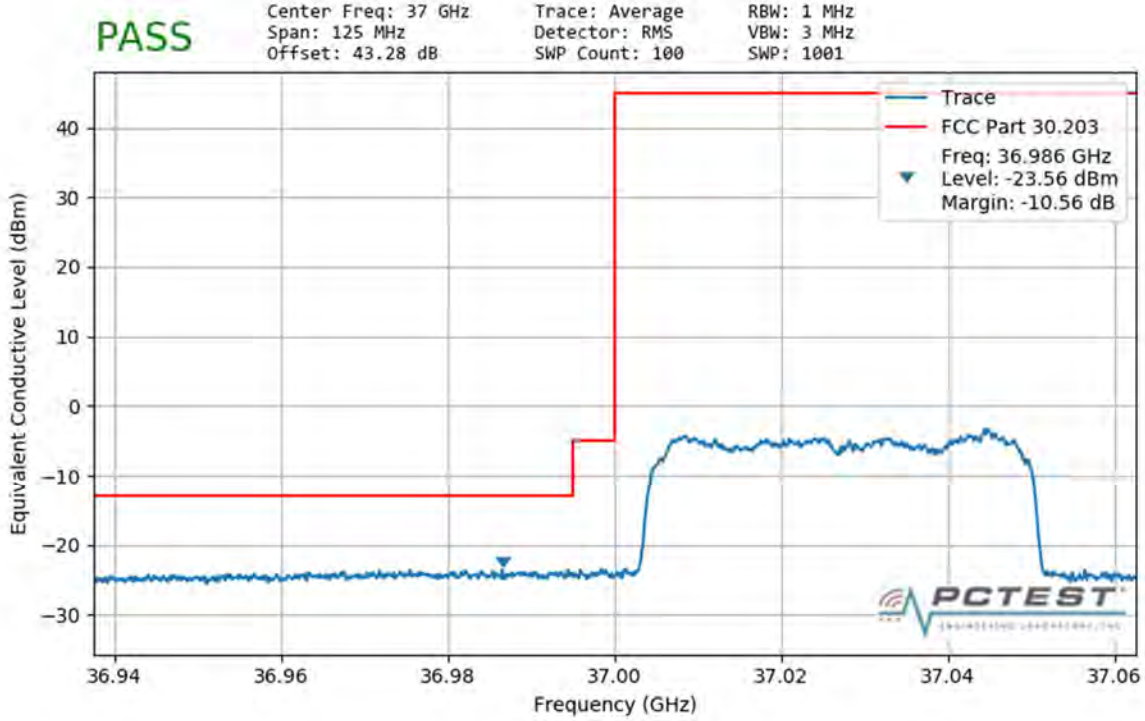


**Plot 7-313. Ant3 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

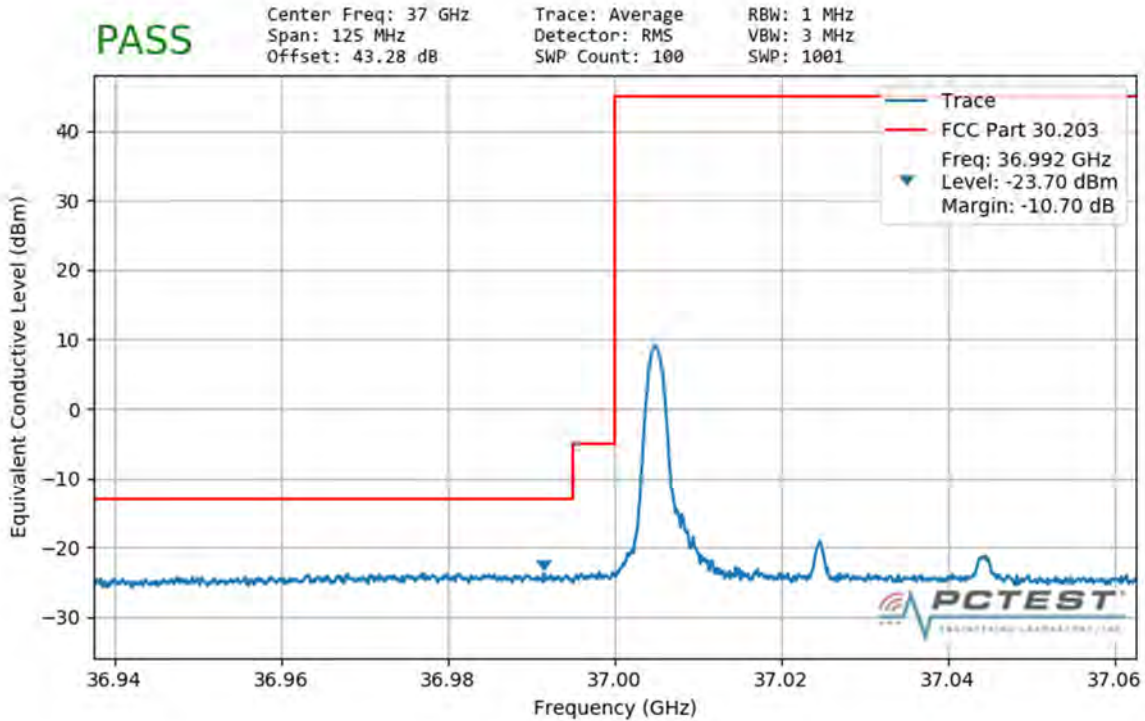


**Plot 7-314. Ant3 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset			Page 261 of 286

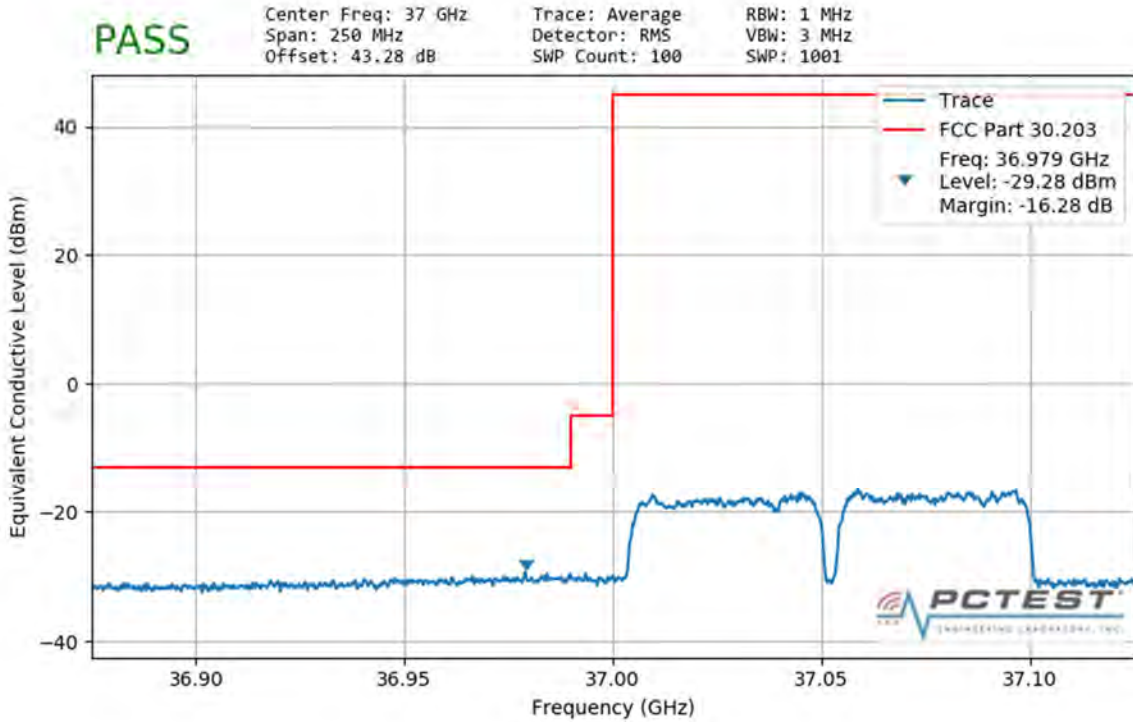


**Plot 7-315. Ant3 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

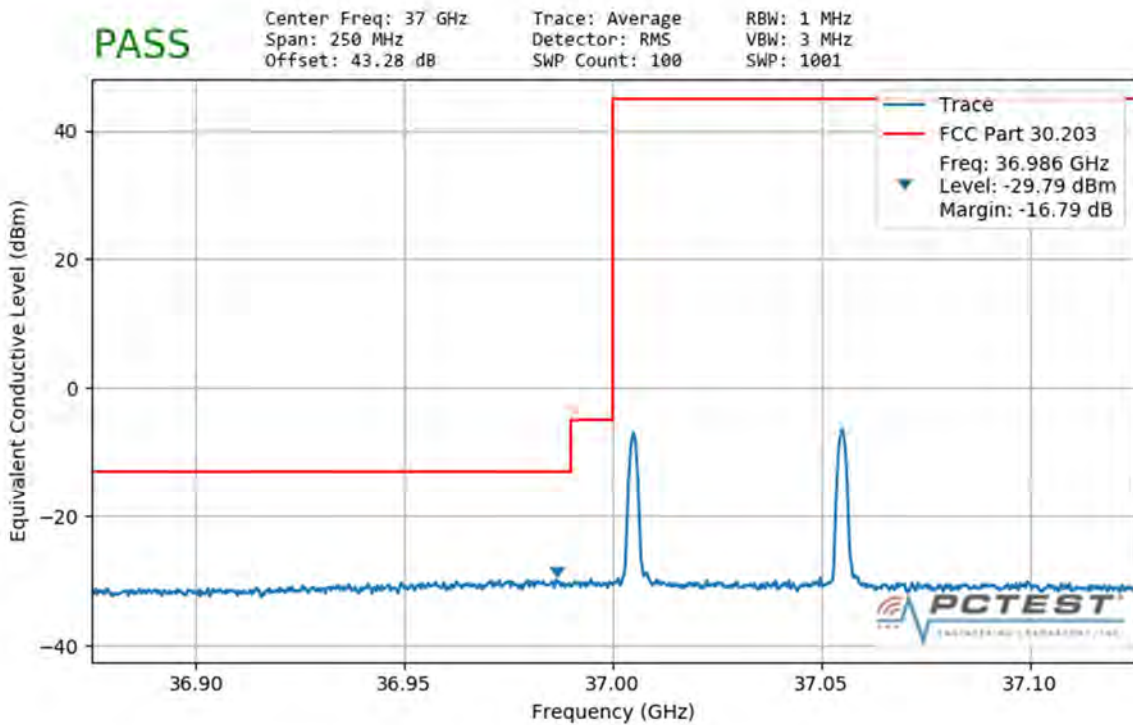


**Plot 7-316. Ant3 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset			Page 262 of 286

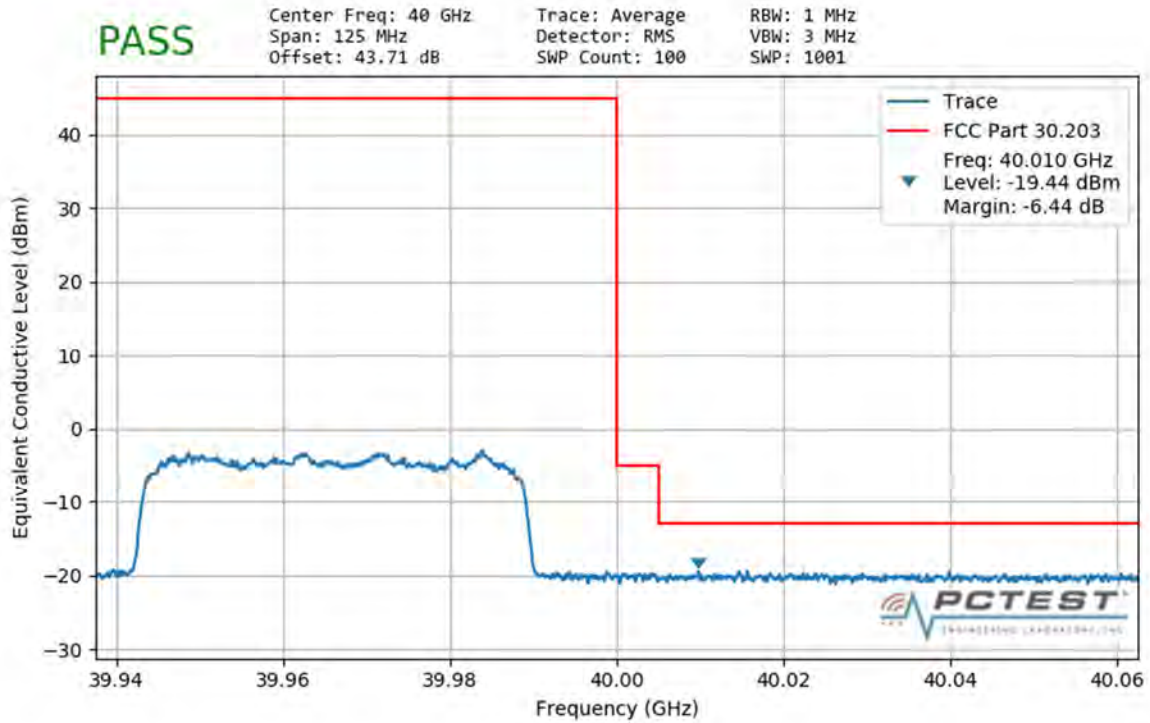


**Plot 7-317. Ant3 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

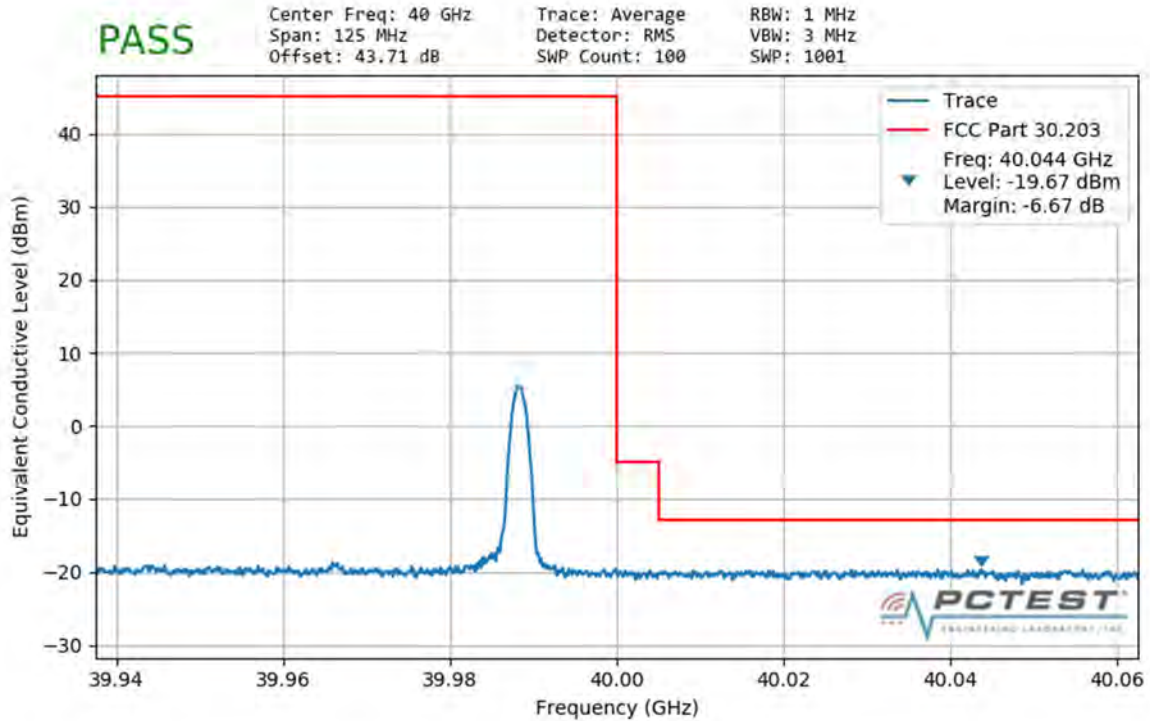


**Plot 7-318. Ant3 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 263 of 286

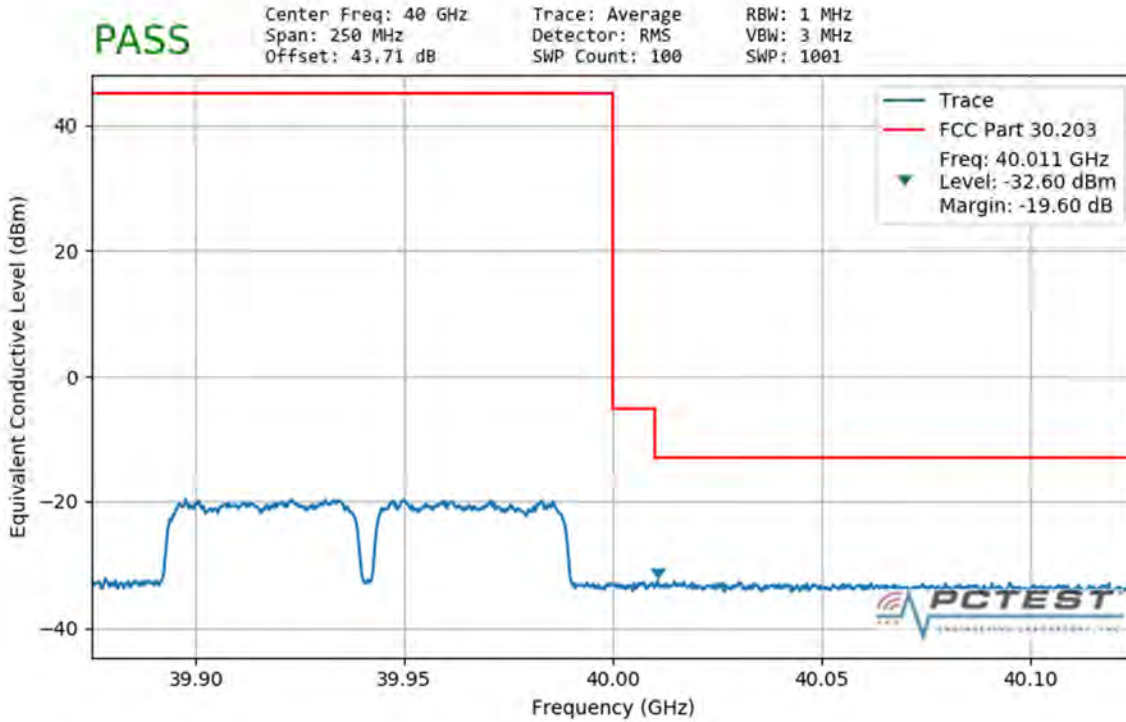


**Plot 7-319. Ant3 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

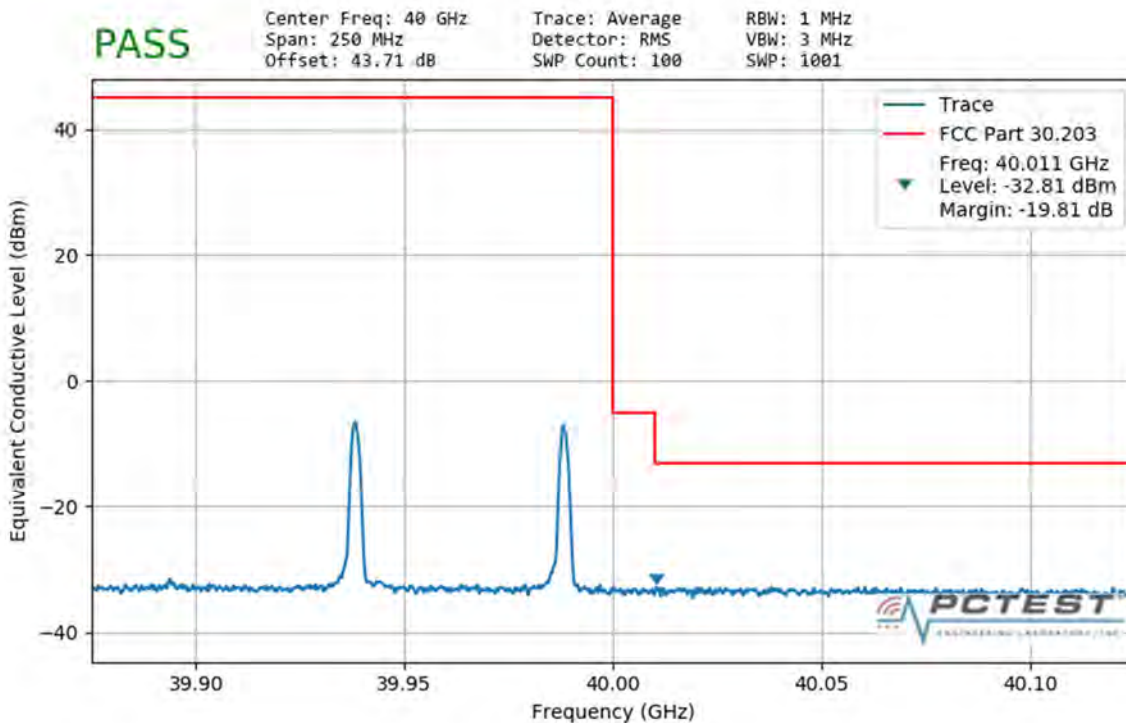


**Plot 7-320. Ant3 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 264 of 286

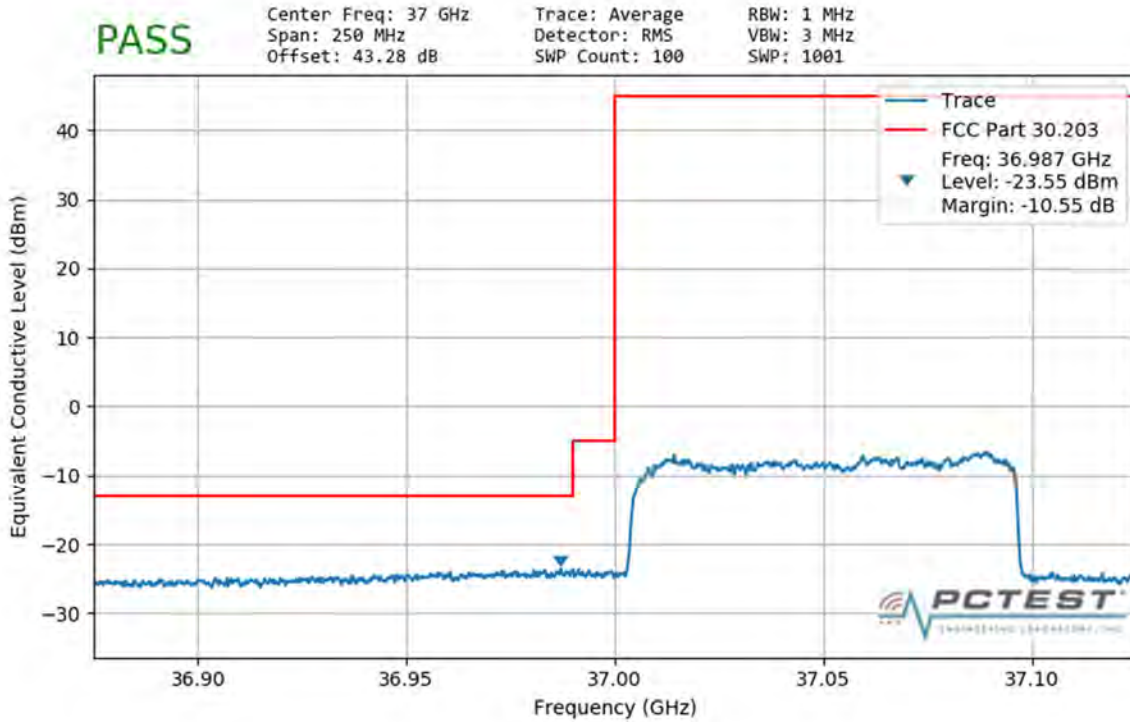


**Plot 7-321. Ant3 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

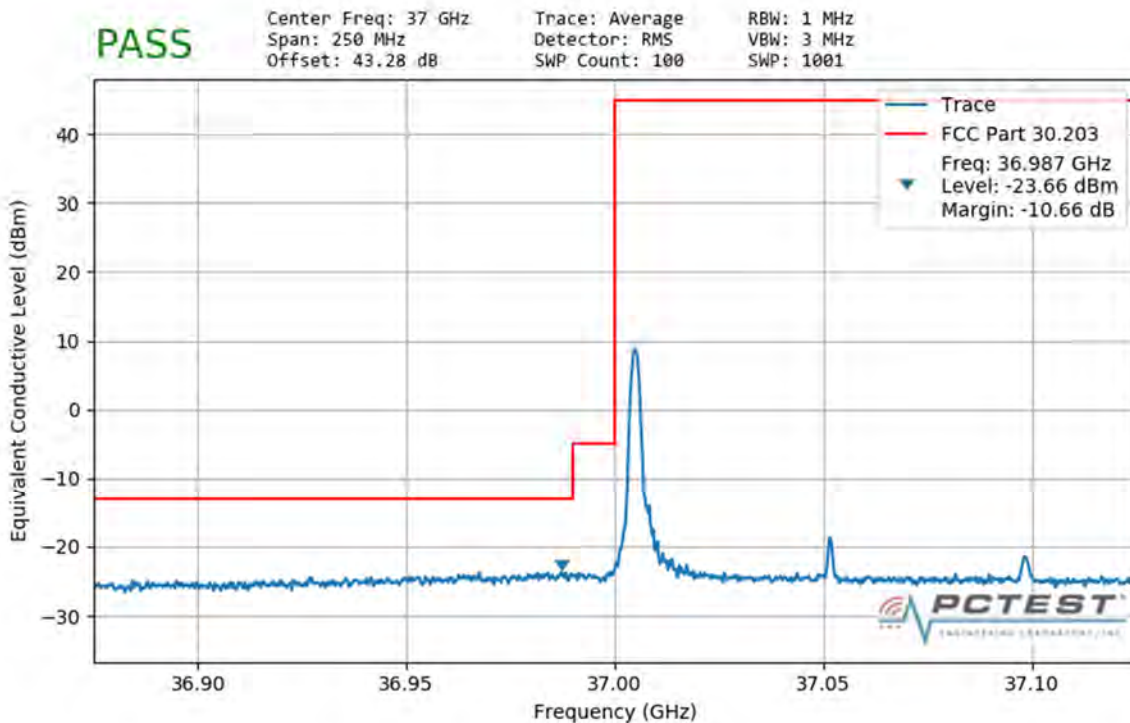


**Plot 7-322. Ant3 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 265 of 286

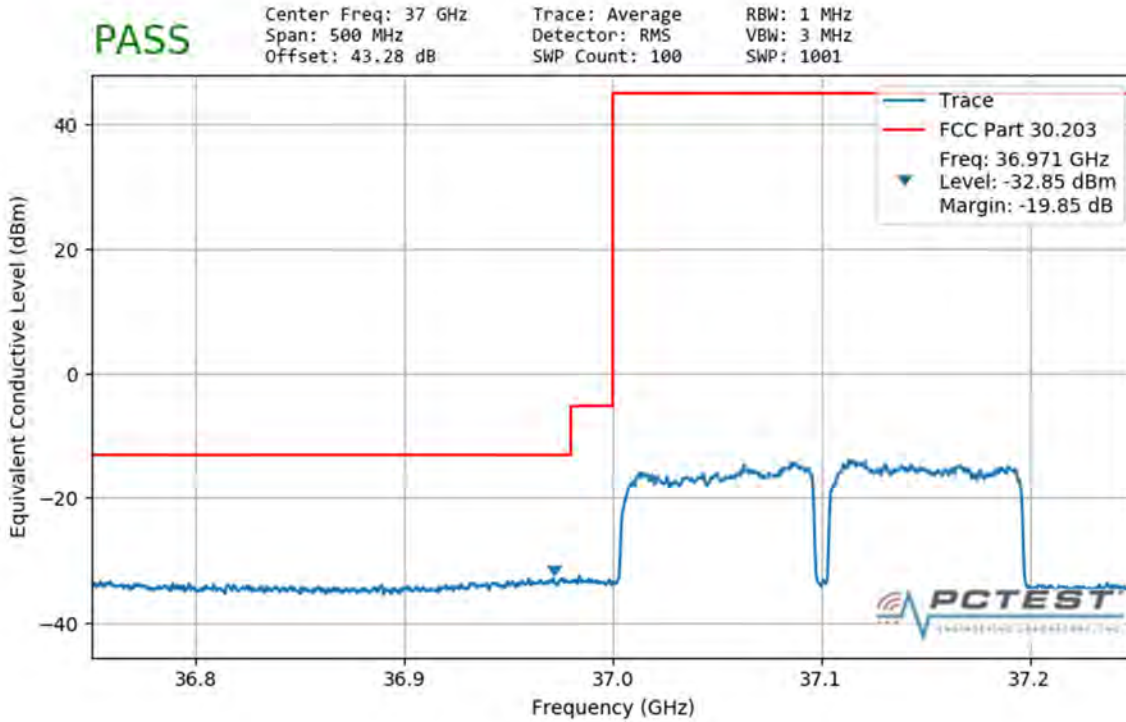


**Plot 7-323. Ant3 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

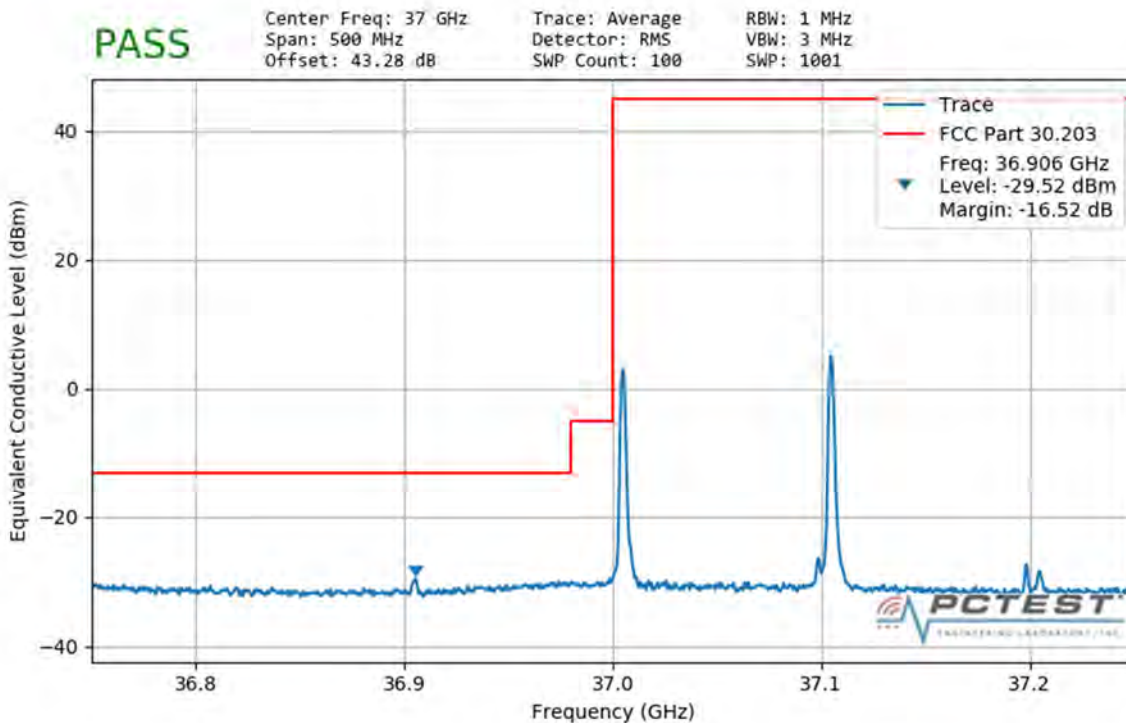


**Plot 7-324. Ant3 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 266 of 286



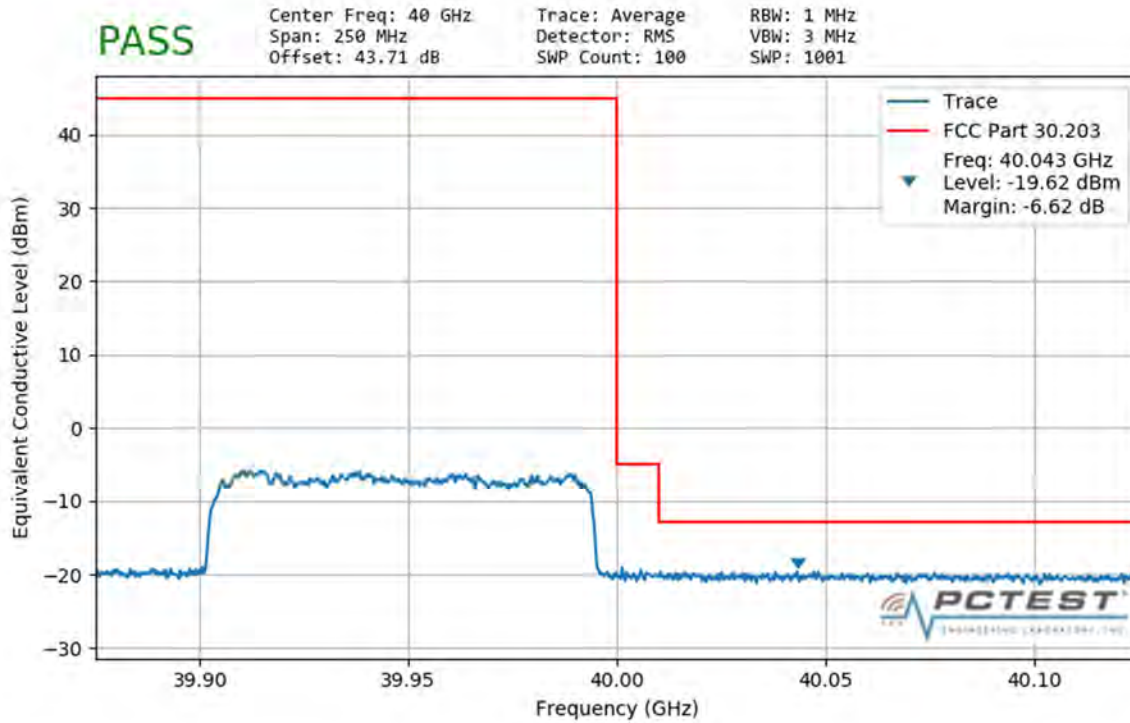


**Plot 7-325. Ant3 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

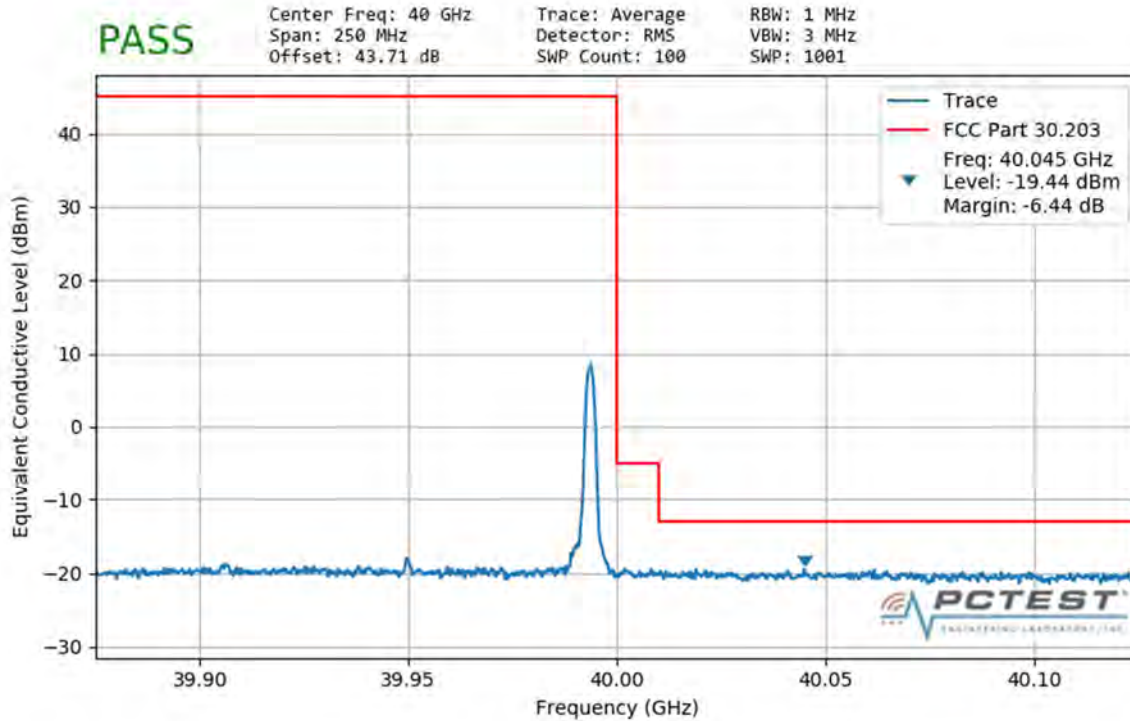


**Plot 7-326. Ant3 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 267 of 286

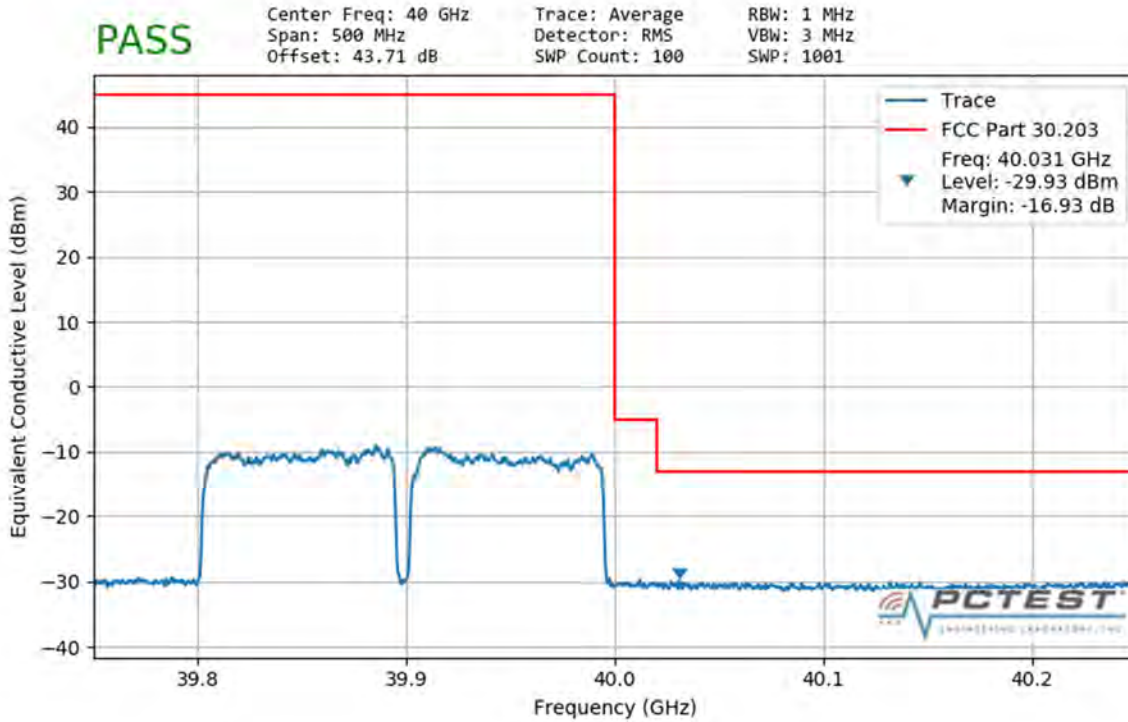


**Plot 7-327. Ant3 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

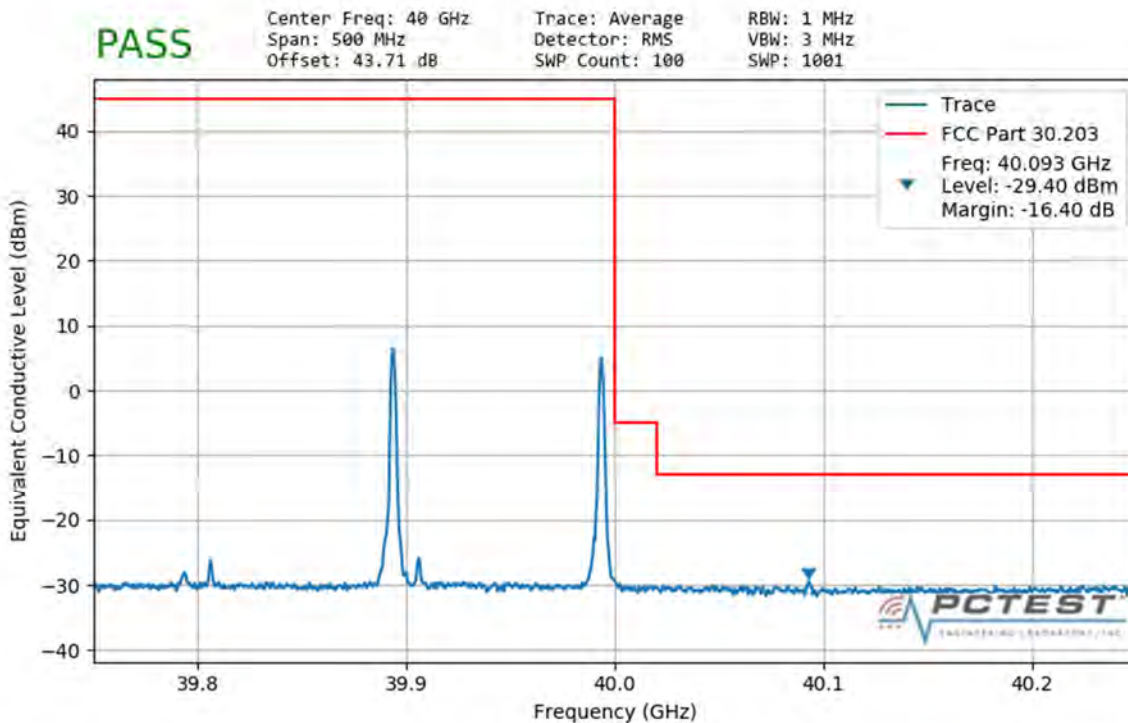


**Plot 7-328. Ant3 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 268 of 286

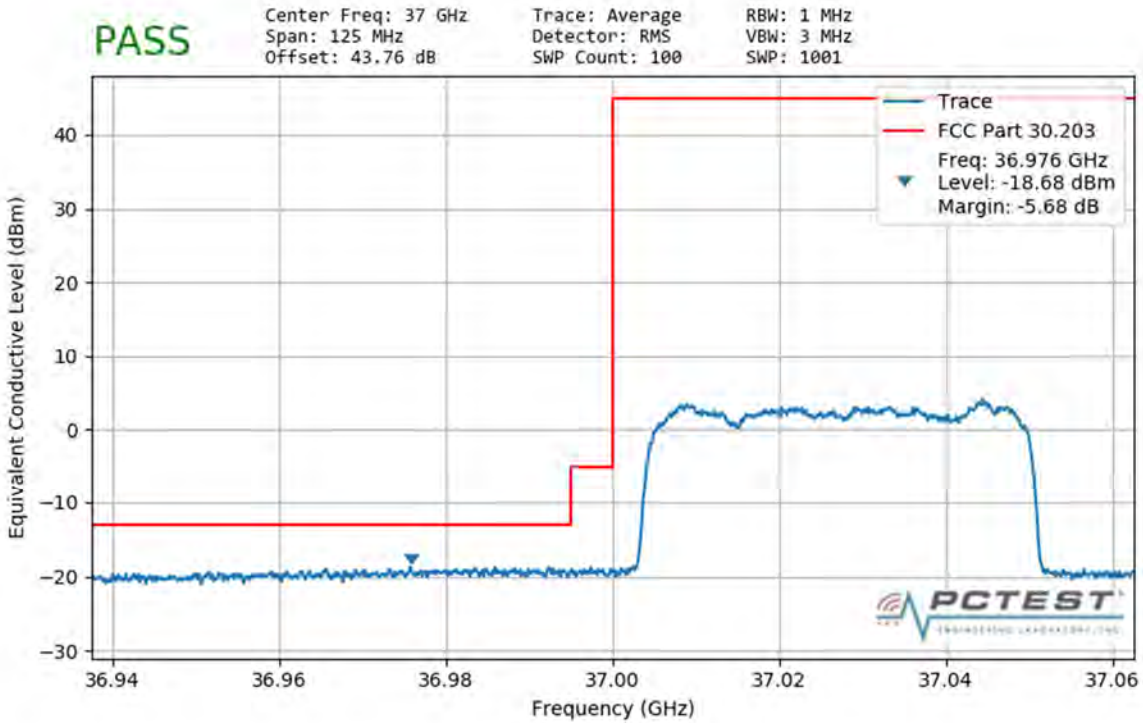


**Plot 7-329. Ant4 Lower Band Edge (50MHz-1CC – QPSK Full RB)**

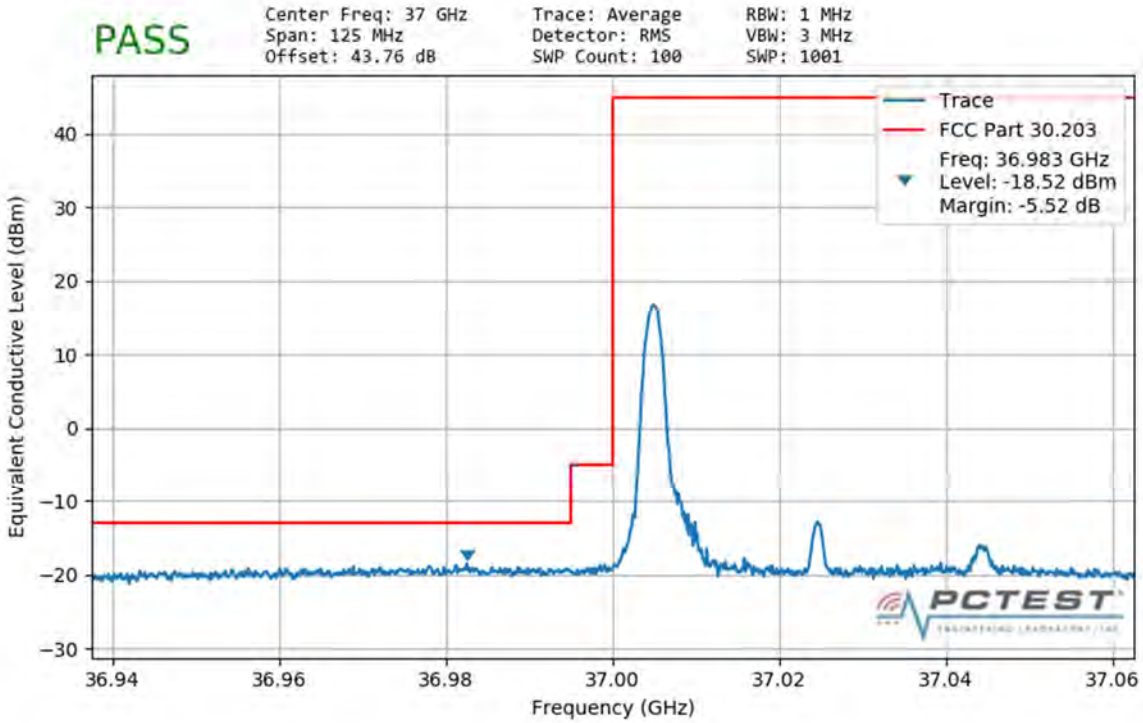


**Plot 7-330. Ant4 Lower Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 269 of 286

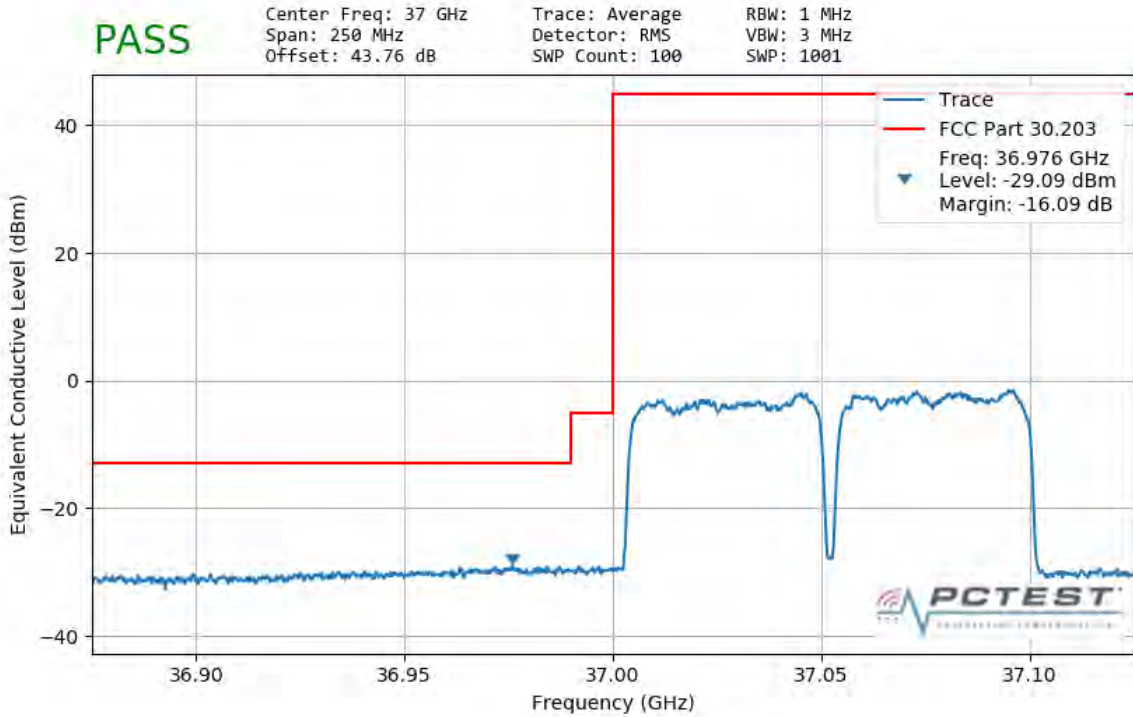


**Plot 7-331. Ant4 Lower Band Edge (50MHz-2CC – QPSK Full RB)**

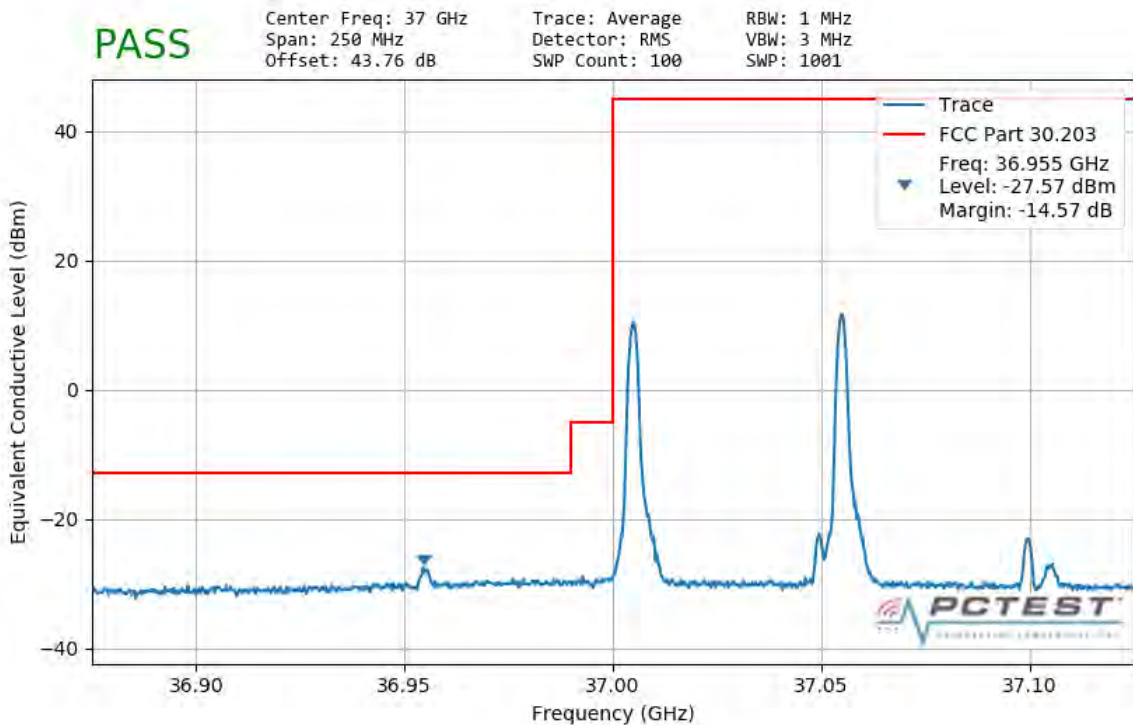


**Plot 7-332. Ant4 Lower Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 270 of 286

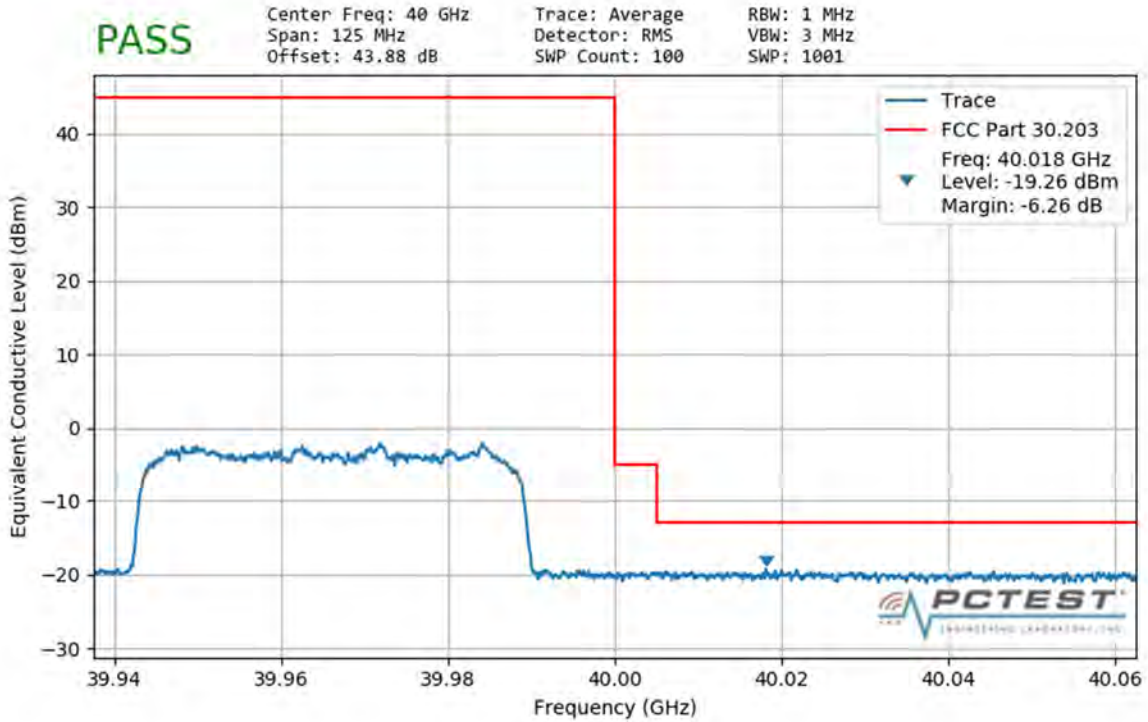


**Plot 7-333. Ant4 Upper Band Edge (50MHz-1CC – QPSK Full RB)**

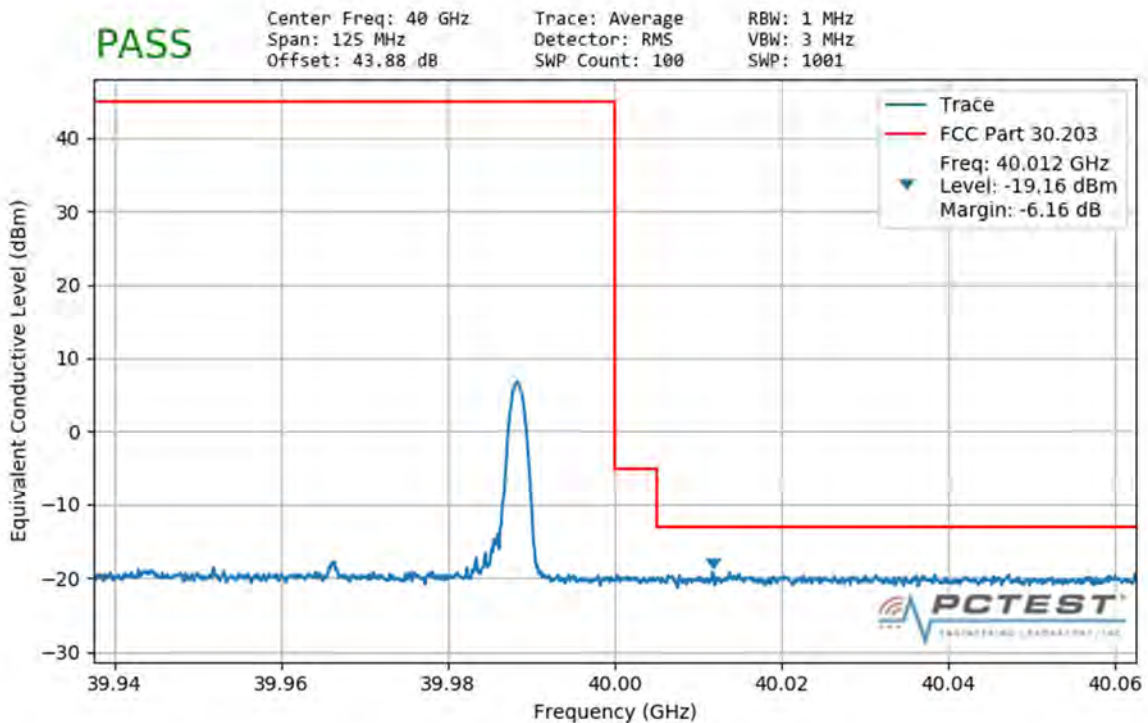


**Plot 7-334. Ant4 Upper Band Edge (50MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 271 of 286

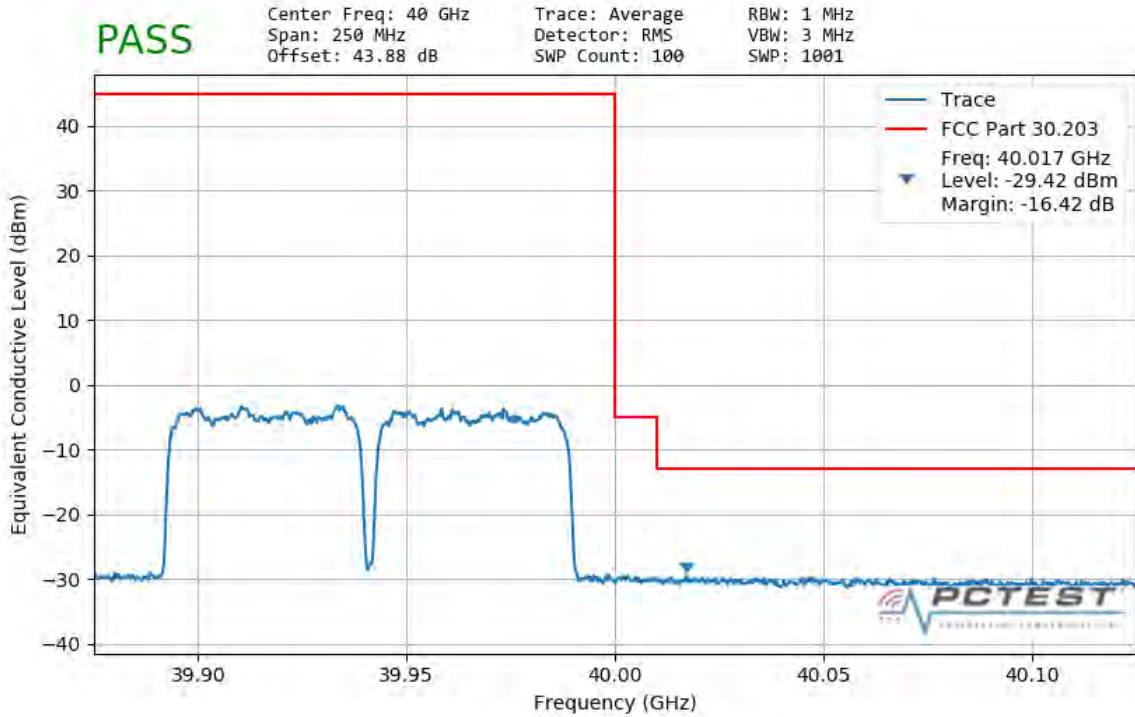


**Plot 7-335. Ant4 Upper Band Edge (50MHz-2CC – QPSK Full RB)**

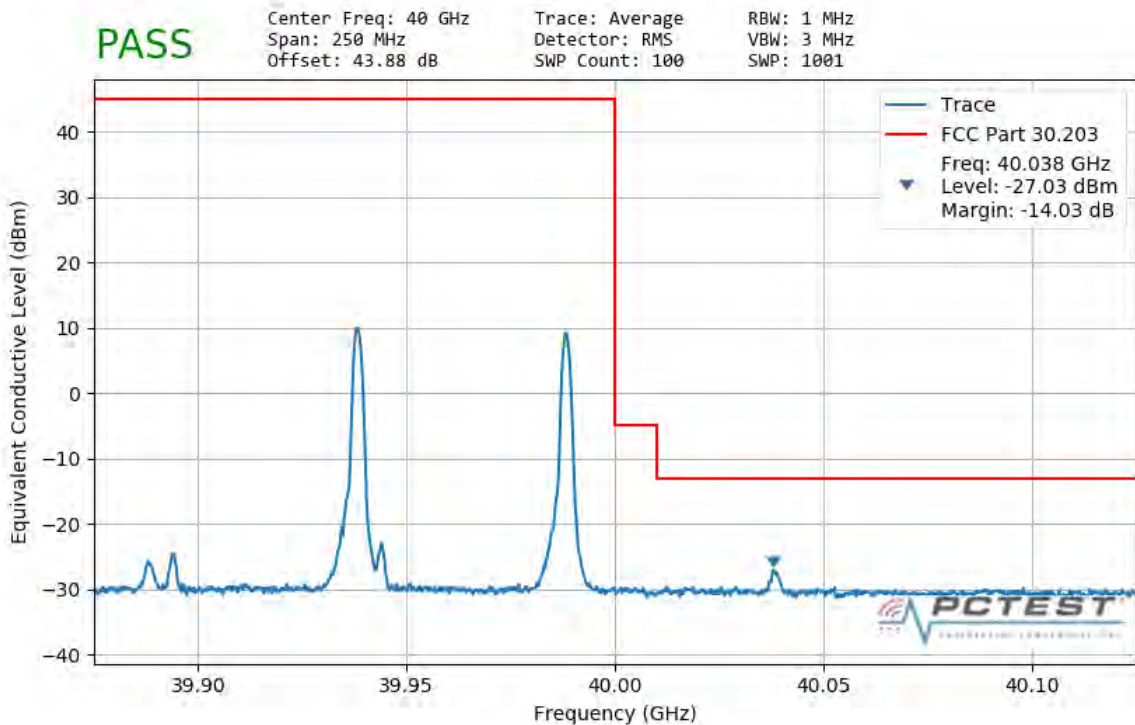


**Plot 7-336. Ant4 Upper Band Edge (50MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 272 of 286

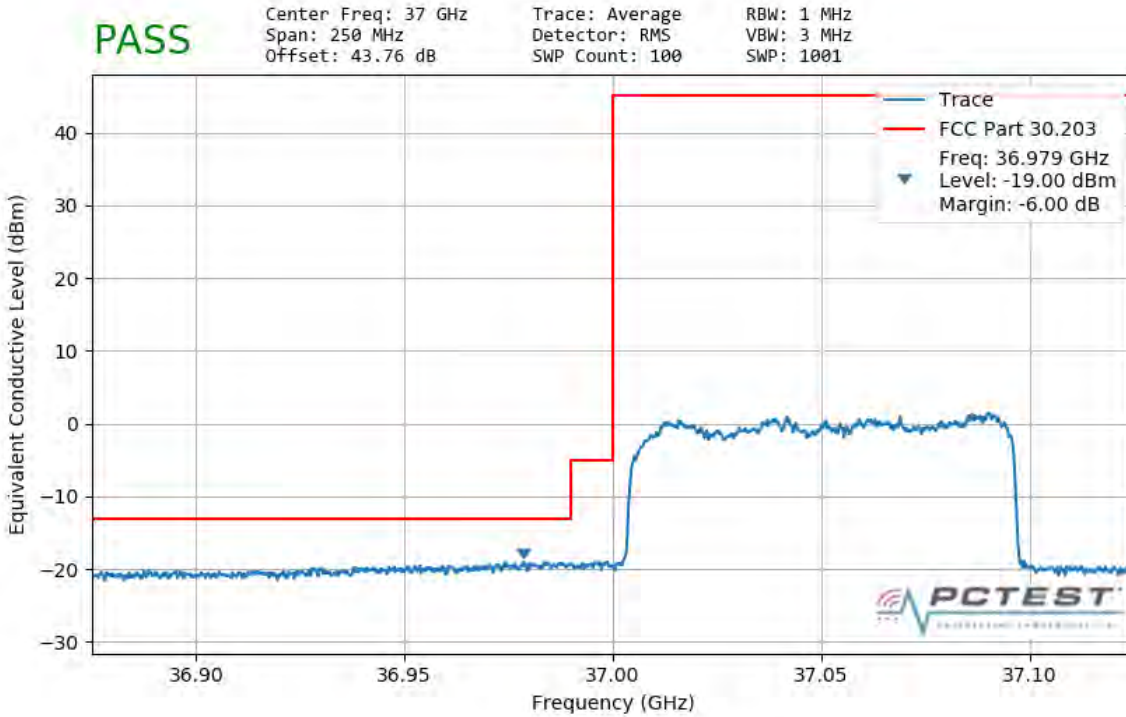


**Plot 7-337. Ant4 Lower Band Edge (100MHz-1CC – QPSK Full RB)**

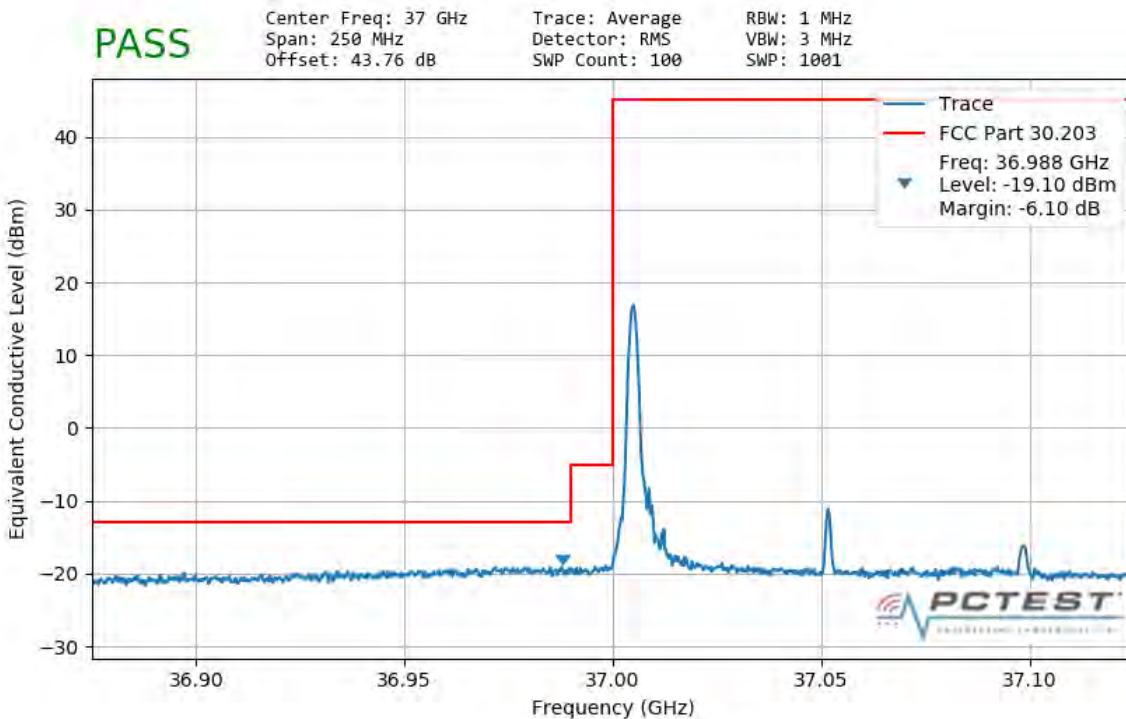


**Plot 7-338. Ant4 Lower Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 273 of 286

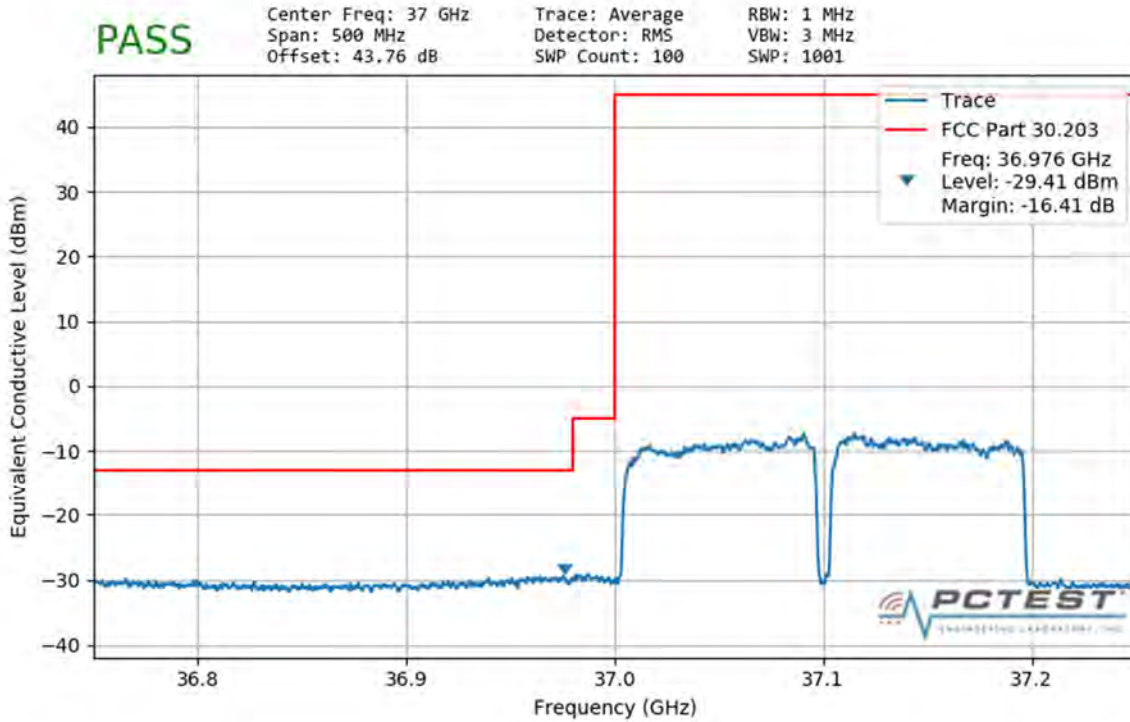


**Plot 7-339. Ant4 Lower Band Edge (100MHz-2CC – QPSK Full RB)**

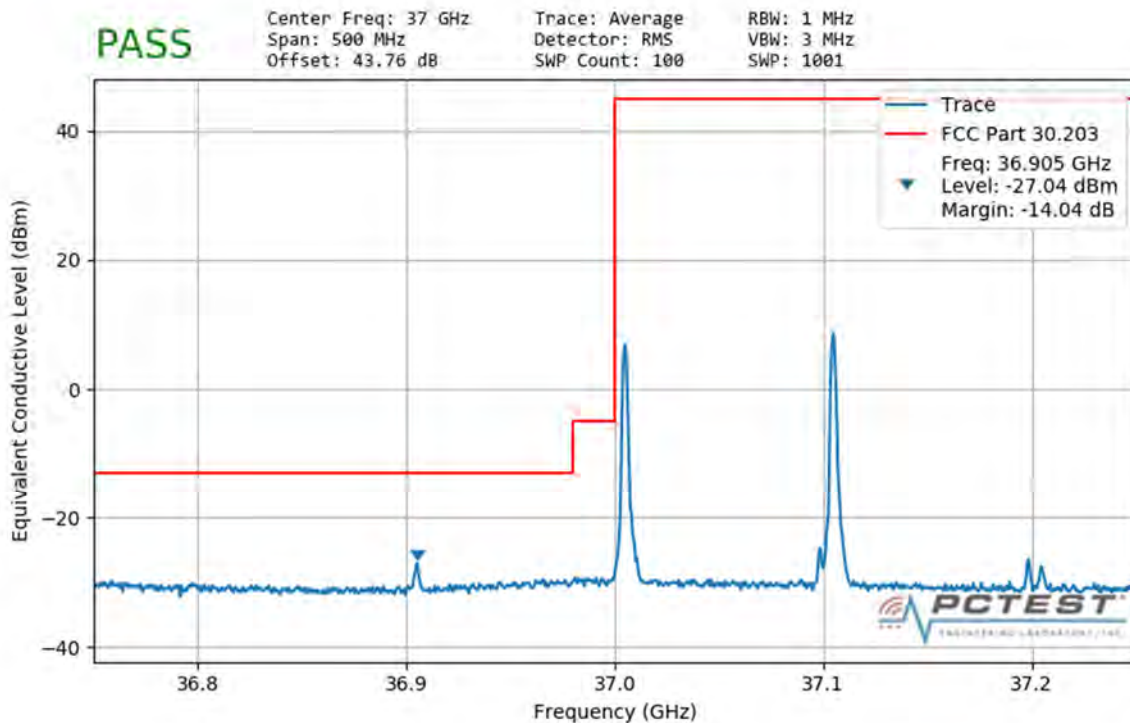


**Plot 7-340. Ant4 Lower Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 274 of 286



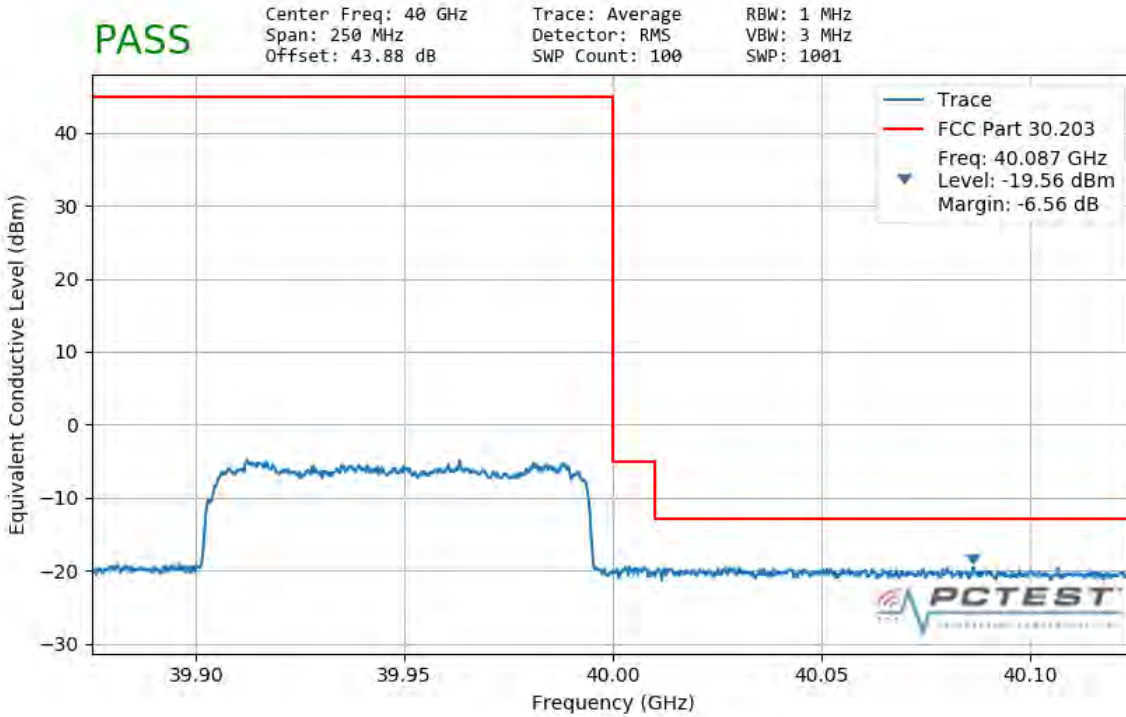


**Plot 7-341. Ant4 Upper Band Edge (100MHz-1CC – QPSK Full RB)**

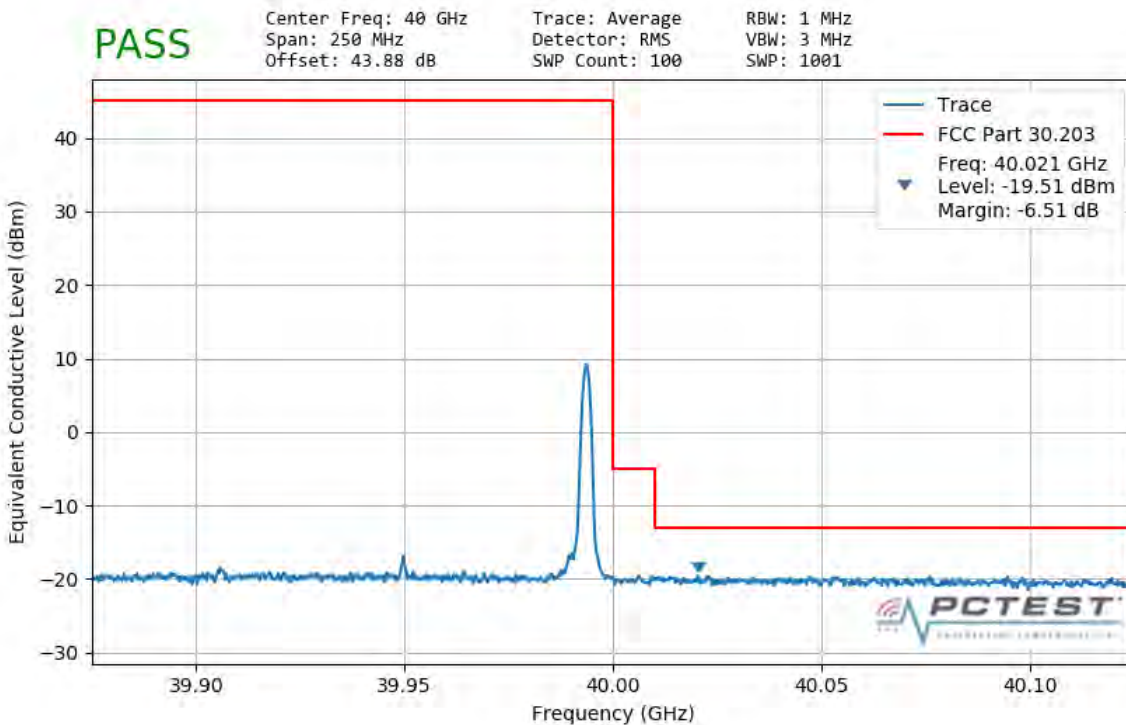


**Plot 7-342. Ant4 Upper Band Edge (100MHz-1CC – QPSK 1 RB)**

FCC ID: A3LSMG986U	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 275 of 286

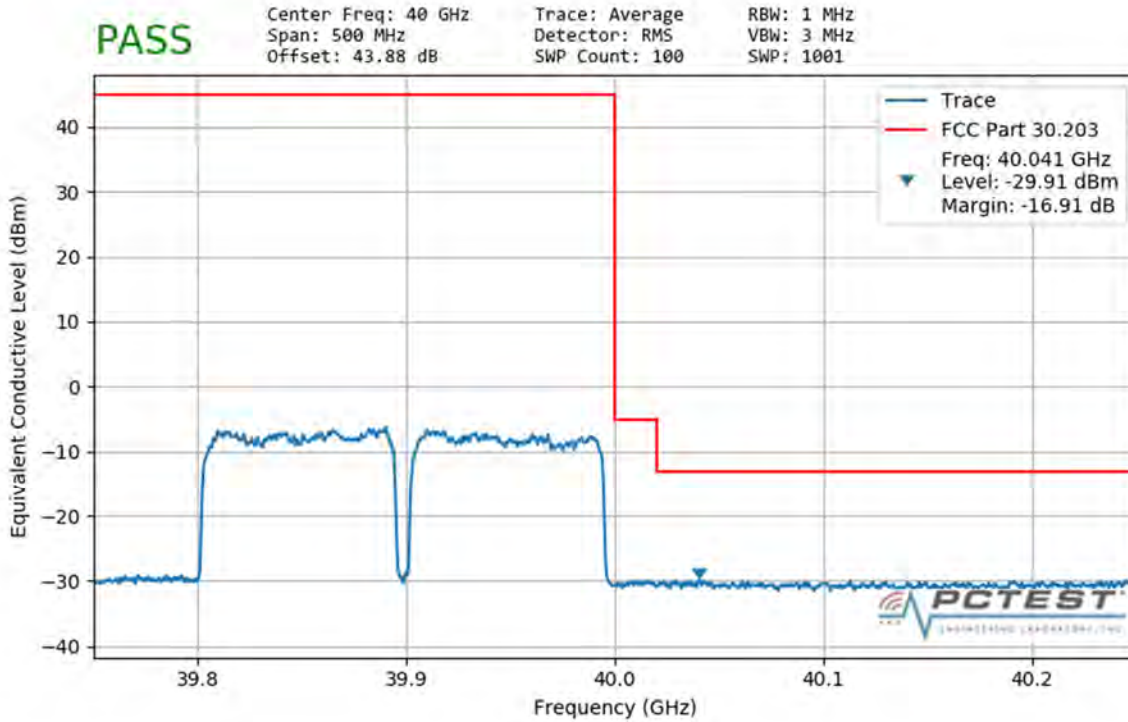

**Plot 7-343. Ant4 Upper Band Edge (100MHz-2CC – QPSK Full RB)**

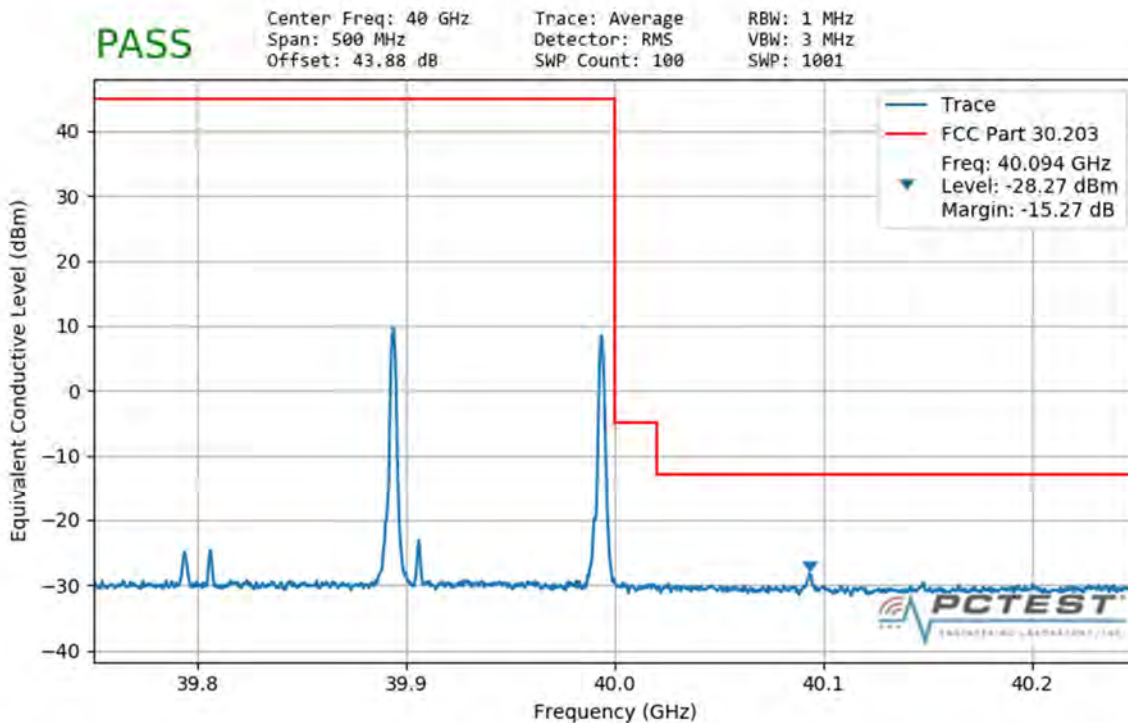

**Plot 7-344. Ant4 Upper Band Edge (100MHz-2CC – QPSK 1 RB)**

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 276 of 286

## 7.6 Frequency Stability / Temperature Variation

### \$2.1055

#### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

#### Test Procedure Used

ANSI C63.5-2015 Section 5.6  
KDB 842590 D01 v01 Section 4.5

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### Test Setup

The EUT was measured using horn antenna connected to a spectrum analyzer. The EUT was placed inside an environmental chamber. Using a foam plug, the horn antenna measured the frequency of the fundamental signal.

#### Test Notes

The Frequency Deviation column in the table below is the amount of deviation measured from the center frequency of the Reference measurement (first row).

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 277 of 286

**Frequency Stability Measurements (Band n261)**  
**§2.1055**

OPERATING FREQUENCY: 27,922,080,000 Hz  
 CHANNEL: 2077867  
 REFERENCE VOLTAGE: 4.19 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.19	+ 20 (Ref)	28,107,080,000	0	0.0000000
100 %		- 30	27,705,080,000	402,000,000	1.4397208
100 %		- 20	28,218,080,000	-111,000,000	-0.3975349
100 %		- 10	27,866,080,000	241,000,000	0.8631162
100 %		0	27,737,080,000	370,000,000	1.3251162
100 %		+ 10	27,979,080,000	128,000,000	0.4584186
100 %		+ 20	28,065,080,000	42,000,000	0.1504186
100 %		+ 30	27,782,080,000	325,000,000	1.1639534
100 %		+ 40	28,031,080,000	76,000,000	0.2721860
100 %		+ 50	27,671,080,000	436,000,000	1.5614883
BATT. ENDPOINT	3.79	+ 20	27,816,080,000	291,000,000	1.0421860


**Table 7-157. Frequency Stability Data (n261)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 278 of 286	

**Frequency Stability Measurements (Band n261)**  
S2.1055

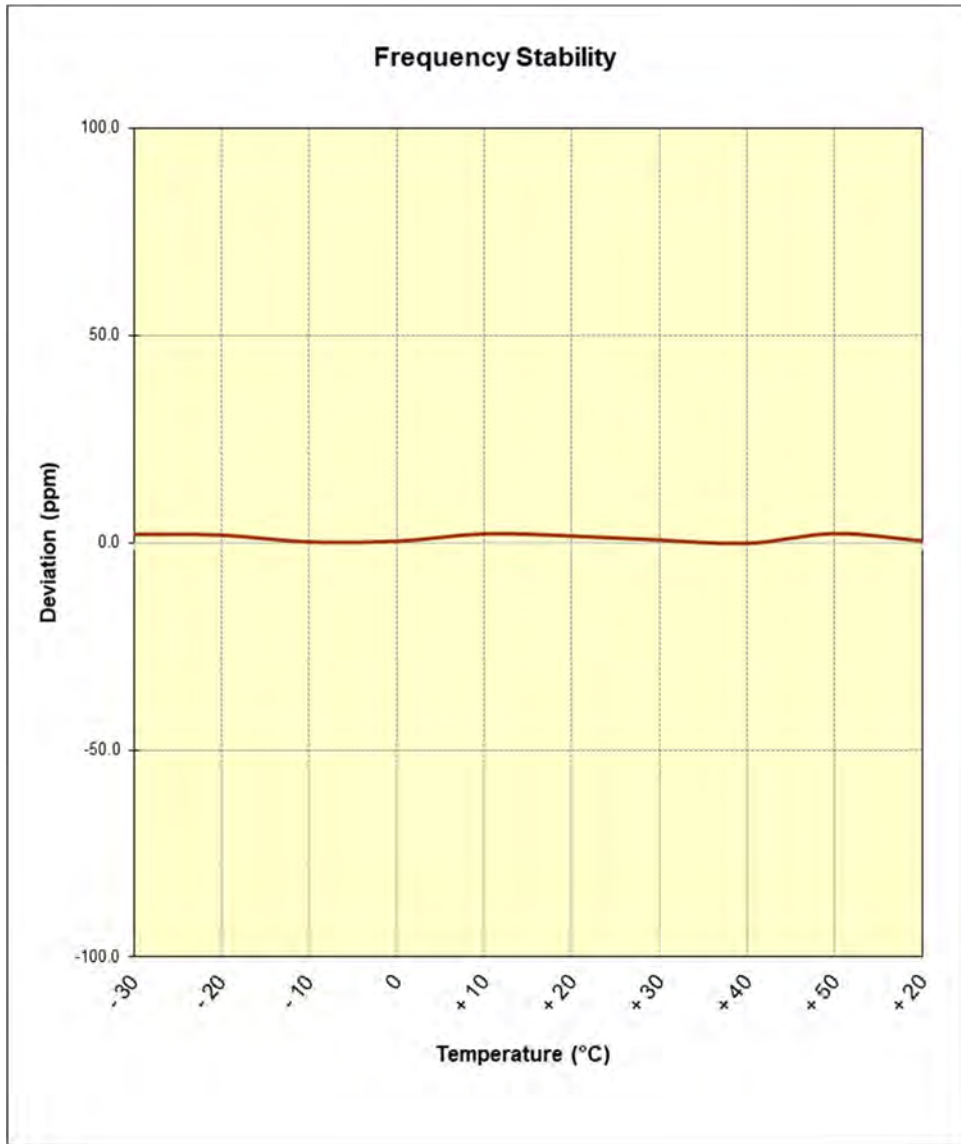

**Table 7-158. Frequency Stability Graph (n261)**

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 279 of 286

**Frequency Stability Measurements (Band n260)**  
**§2.1055**

OPERATING FREQUENCY: 38,495,520,000 Hz  
 CHANNEL: 2254091  
 REFERENCE VOLTAGE: 4.19 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.19	+ 20 (Ref)	38,522,520,000	0	0.0000000
100 %		- 30	38,317,520,000	205,000,000	0.5325295
100 %		- 20	38,630,520,000	-108,000,000	-0.2805521
100 %		- 10	38,752,520,000	-230,000,000	-0.5974721
100 %		0	38,669,520,000	-147,000,000	-0.3818626
100 %		+ 10	38,739,520,000	-217,000,000	-0.5637020
100 %		+ 20	38,614,520,000	-92,000,000	-0.2389888
100 %		+ 30	38,303,520,000	219,000,000	0.5688974
100 %		+ 40	38,453,520,000	69,000,000	0.1792416
100 %		+ 50	38,637,520,000	-115,000,000	-0.2987361
BATT. ENDPOINT		3.79	+ 20	38,747,520,000	-225,000,000


**Table 7-159. Frequency Stability Data (n260)**

**Note:**

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset	Page 280 of 286	

**Frequency Stability Measurements (Band n260)**  
**\$2.1055**

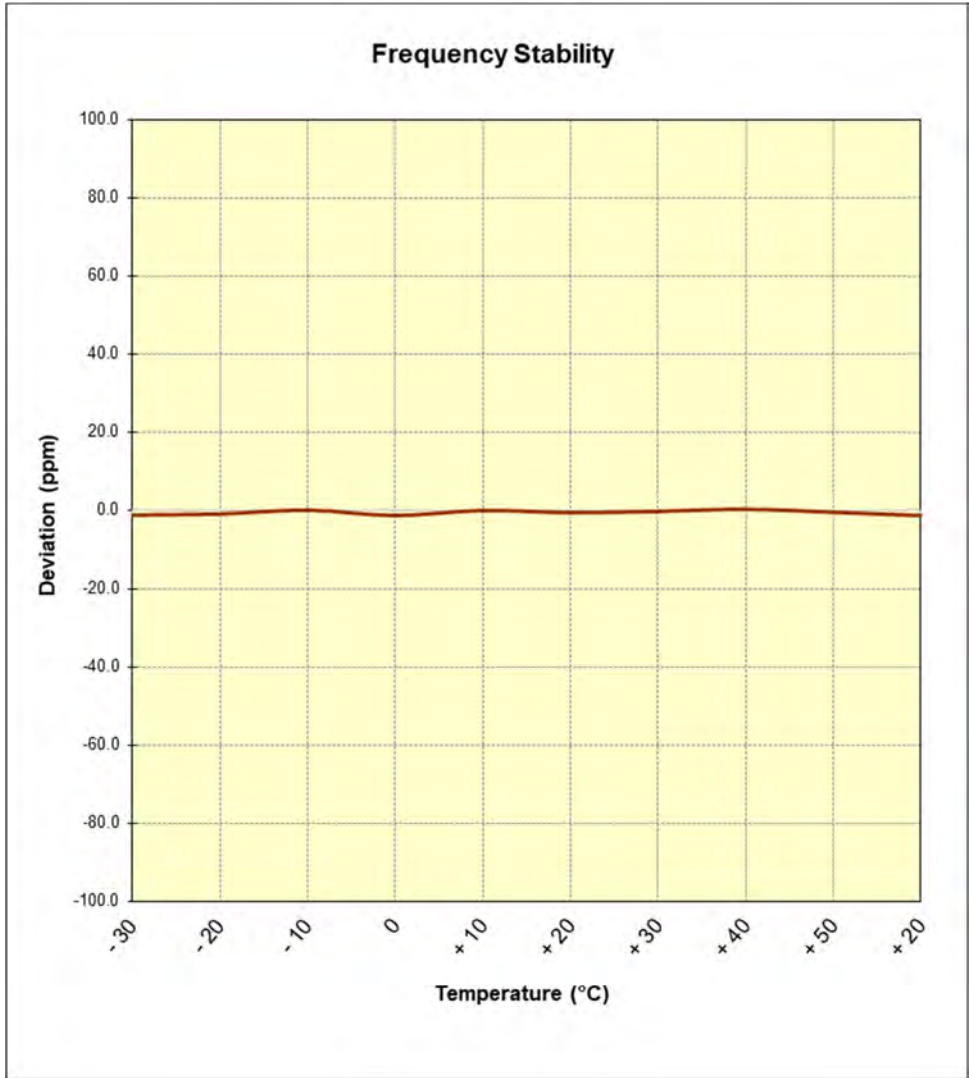

**Table 7-160. Frequency Stability Graph (n260)**

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset		Page 281 of 286

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG986U** complies with all the requirements of Part 30.

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset	Page 282 of 286	



## 9.0 APPENDIX A

### 9.1 VDI Mixer Verification Certificate



**Virginia Diodes, Inc**  
 979 2nd St. SE  
 Suite 309  
 Charlottesville, VA 22902  
 Phone: 434-297-3257  
 Fax: 434-297-3258

#### Certificate of Conformance

To: PCTEST Engineering Laboratory  
 7185 Oakland Mills Road  
 Columbia, MD 21046  
 United States


From: Virginia Diodes, Inc  
 979 2nd St. SE  
 Suite 309  
 Charlottesville, VA 22902

Packing List No: 193065

Today's Date: 10/02/19

Quantity Shipped	Unit	Description	Order-Job Number
1	EA	VDIWR19.0SAX WR19SAX / SN: SAX 411	19329-01

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

  
 Authorized Signature  
 Virginia Diodes, Inc

Page 1 of 1

FCC ID: A3LSMG986U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 283 of 286



**Virginia Diodes, Inc**  
 979 2nd St. SE  
 Suite 309  
 Charlottesville, VA 22902  
 Phone: 434-297-3257  
 Fax: 434-297-3258

**Certificate of Conformance**


**To:** PCTEST Engineering Laboratory  
 6660-B Dobbin Road  
 Columbia, MD 21045  
 United States

**From:** Virginia Diodes, Inc  
 979 2nd St. SE  
 Suite 309  
 Charlottesville, VA 22902

<b>Shipping Date:</b> 05/14/18	<b>Today's Date:</b> 05/14/18
--------------------------------	-------------------------------

Quantity	Shipped	Unit	Description
1	EA		VDIWR12.0SAX WR12SAX - Spectrum Analyzer Extension Module / SN: SAX 252

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).

  
 Authorized Signature  
 Virginia Diodes, Inc

<b>FCC ID:</b> A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1910220166-06-R1.A3L	<b>Test Dates:</b> 10/11 - 12/06/2019	<b>EUT Type:</b> Portable Handset		Page 284 of 286





**Virginia Diodes, Inc**  
 979 2nd St. SE  
 Suite 309  
 Charlottesville, VA 22902  
 Phone: 434-297-3257  
 Fax: 434-297-3258

**Certificate of Conformance**

To: PCTEST Engineering Laboratory  
 6660-B Dobbin Road  
 Columbia, MD 21045  
 United States

From: Virginia Diodes, Inc  
 979 2nd St. SE  
 Suite 309  
 Charlottesville, VA 22902

<b>Shipping Date:</b> 05/21/18	<b>Today's Date:</b> 05/22/18
--------------------------------	-------------------------------

Quantity	Shipped	Unit	Description
1	EA	VDIWR5.1SAX	WR5.1SAX - Spectrum Analyzer Extension Module; SN: SAX 254.

The VDI product(s) in this shipment meet(s) the guidelines for performance specifications established in accordance with the corresponding Purchase Order. Data presented in the User Guide, where applicable, has been obtained in accordance with VDI's Quality Management System. All instruments, used to obtain data, which require calibration have been calibrated with equipment traceable to the National Institute of Standards and Technology (NIST) and through NIST to the International System of Units (SI).



Authorized Signature  
 Virginia Diodes, Inc

FCC ID: A3LSMG986U		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1910220166-06-R1.A3L	Test Dates: 10/11 - 12/06/2019	EUT Type: Portable Handset		Page 286 of 286