

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
June 17, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2206-FC022

FCC ID: A3LSMG990B2

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G990B2/DS
 Additional Model(s): SM-G990B2
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M09G7D	QPSK	0.170	22.30
		1M09W7D	16QAM	0.148	21.70
		1M09W7D	64QAM	0.112	20.50
		1M09W7D	256QAM	0.056	17.50
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.173	22.37
		2M70W7D	16QAM	0.149	21.74
		2M70W7D	64QAM	0.115	20.62
		2M70W7D	256QAM	0.057	17.59
LTE – Band66/4 (5)	1712.5 – 1777.5	4M50G7D	QPSK	0.155	21.90
		4M49W7D	16QAM	0.135	21.29
		4M51W7D	64QAM	0.104	20.17
		4M52W7D	256QAM	0.052	17.14
LTE – Band66/4 (10)	1715.0 – 1775.0	8M97G7D	QPSK	0.159	22.02
		8M96W7D	16QAM	0.138	21.39
		8M98W7D	64QAM	0.106	20.24
		8M99W7D	256QAM	0.053	17.27
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.160	22.05
		13M4W7D	16QAM	0.139	21.42
		13M5W7D	64QAM	0.108	20.32
		13M5W7D	256QAM	0.053	17.27
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.149	21.74
		17M9W7D	16QAM	0.129	21.09
		18M0W7D	64QAM	0.101	20.05
		17M9W7D	256QAM	0.050	17.00

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2206-FC022

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2206-FC022	June 17, 2022	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS	30
8.6 BAND EDGE	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS.....	50
10. ANNEX A_ TEST SETUP PHOTO.....	171

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG990B2
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-G990B2/DS
Additional Model(s):	SM-G990B2
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	May 26, 2022~ June 09, 2022
Serial number:	Radiated: R3CT40C5N2R Conducted: R3CT40C5GEE

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, NFC, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

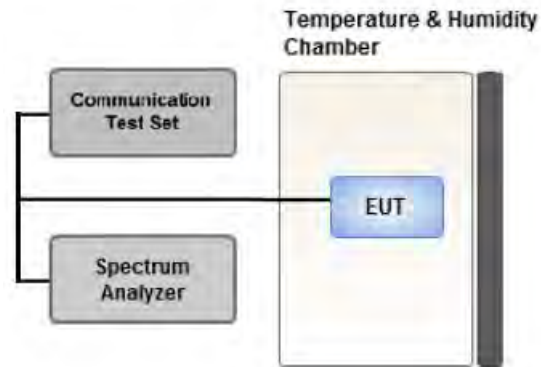

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

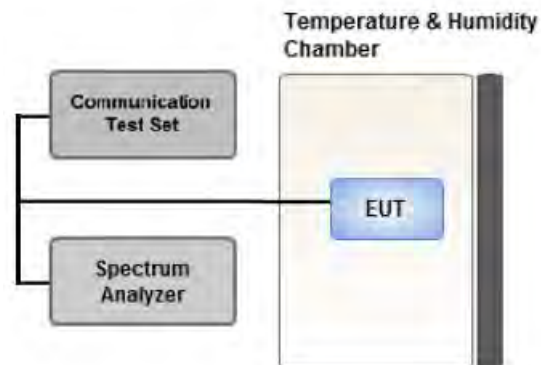

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

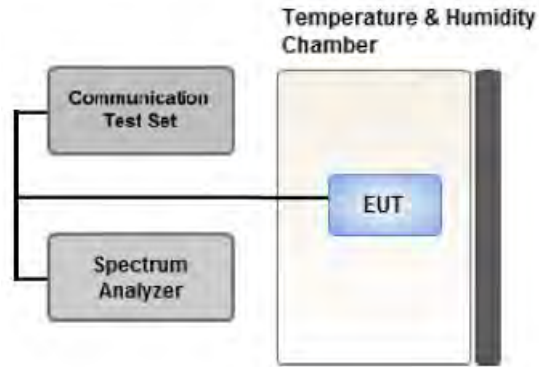

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

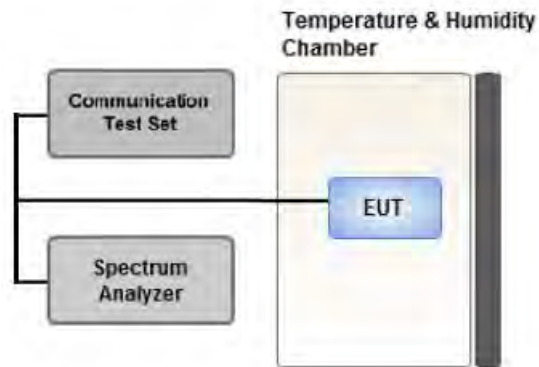

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

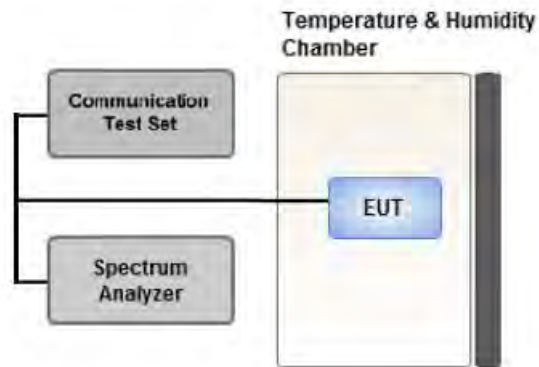

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- Main1 Antenna: LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SM-G990B2/DS & additional models were tested and the worst case results are reported.
 (Worst case : SM-G990B2/DS)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- Main1 Antenna: LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SM-G990B2/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-G990B2/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
20	Low	1	0		
	High	1	99		
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
			High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/02/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1710.7	LTE B66/ B4 1.4 MHz	QPSK	-19.48	14.31	10.04	2.05	V	< 1.00	0.170	22.30
		16-QAM	-20.08	13.71	10.04	2.05	V		0.148	21.70
		64-QAM	-21.28	12.51	10.04	2.05	V		0.112	20.50
		256-QAM	-24.28	9.51	10.04	2.05	V		0.056	17.50
1745.0		QPSK	-20.89	12.83	10.18	2.06	V		0.125	20.95
		16-QAM	-21.54	12.18	10.18	2.06	V		0.107	20.30
		64-QAM	-22.70	11.02	10.18	2.06	V		0.082	19.14
		256-QAM	-25.73	7.99	10.18	2.06	V		0.041	16.11
1779.3		QPSK	-21.14	12.54	10.26	2.07	V		0.118	20.73
		16-QAM	-21.75	11.93	10.26	2.07	V		0.103	20.12
		64-QAM	-22.91	10.77	10.26	2.07	V		0.079	18.96
		256-QAM	-25.91	7.77	10.26	2.07	V		0.040	15.96

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1711.5	LTE B66/ B4 3 MHz	QPSK	-19.41	14.38	10.04	2.05	V	< 1.00	0.173	22.37
		16-QAM	-20.04	13.75	10.04	2.05	V		0.149	21.74
		64-QAM	-21.16	12.63	10.04	2.05	V		0.115	20.62
		256-QAM	-24.19	9.60	10.04	2.05	V		0.057	17.59
1745.0		QPSK	-20.60	13.12	10.18	2.06	V		0.133	21.24
		16-QAM	-21.21	12.51	10.18	2.06	V		0.116	20.63
		64-QAM	-22.36	11.36	10.18	2.06	V		0.089	19.48
		256-QAM	-25.40	8.32	10.18	2.06	V		0.044	16.44
1778.5		QPSK	-21.01	12.67	10.26	2.07	V		0.122	20.86
		16-QAM	-21.66	12.02	10.26	2.07	V		0.105	20.21
		64-QAM	-22.77	10.91	10.26	2.07	V		0.081	19.10
		256-QAM	-25.80	7.88	10.26	2.07	V		0.041	16.07

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/ B4 5 MHz	QPSK	-19.88	13.91	10.04	2.05	V	< 1.00	0.155	21.90
		16-QAM	-20.49	13.30	10.04	2.05	V		0.135	21.29
		64-QAM	-21.61	12.18	10.04	2.05	V		0.104	20.17
		256-QAM	-24.64	9.15	10.04	2.05	V		0.052	17.14
1745.0		QPSK	-20.69	13.03	10.18	2.06	V		0.130	21.15
		16-QAM	-21.31	12.41	10.18	2.06	V		0.113	20.53
		64-QAM	-22.48	11.24	10.18	2.06	V		0.086	19.36
		256-QAM	-25.51	8.21	10.18	2.06	V		0.043	16.33
1777.5		QPSK	-20.85	12.83	10.26	2.07	V		0.127	21.02
		16-QAM	-21.44	12.24	10.26	2.07	V		0.111	20.43
		64-QAM	-22.57	11.11	10.26	2.07	V		0.085	19.30
		256-QAM	-25.63	8.05	10.26	2.07	V		0.042	16.24

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/ B4 10 MHz	QPSK	-19.74	14.01	10.06	2.05	V	< 1.00	0.159	22.02
		16-QAM	-20.37	13.38	10.06	2.05	V		0.138	21.39
		64-QAM	-21.52	12.23	10.06	2.05	V		0.106	20.24
		256-QAM	-24.49	9.26	10.06	2.05	V		0.053	17.27
1745.0		QPSK	-20.87	12.85	10.18	2.06	V		0.125	20.97
		16-QAM	-21.49	12.23	10.18	2.06	V		0.108	20.35
		64-QAM	-22.68	11.04	10.18	2.06	V		0.082	19.16
		256-QAM	-25.71	8.01	10.18	2.06	V		0.041	16.13
1775.0		QPSK	-21.07	12.62	10.25	2.07	V		0.120	20.80
		16-QAM	-21.75	11.94	10.25	2.07	V		0.103	20.12
		64-QAM	-22.96	10.73	10.25	2.07	V		0.078	18.91
		256-QAM	-25.87	7.82	10.25	2.07	V		0.040	16.00

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/ B4 15 MHz	QPSK	-19.69	14.02	10.08	2.05	V	< 1.00	0.160	22.05
		16-QAM	-20.32	13.39	10.08	2.05	V		0.139	21.42
		64-QAM	-21.42	12.29	10.08	2.05	V		0.108	20.32
		256-QAM	-24.47	9.24	10.08	2.05	V		0.053	17.27
1745.0		QPSK	-20.67	13.05	10.18	2.06	V		0.131	21.17
		16-QAM	-21.36	12.36	10.18	2.06	V		0.112	20.48
		64-QAM	-22.39	11.33	10.18	2.06	V		0.088	19.45
		256-QAM	-25.48	8.24	10.18	2.06	V		0.043	16.36
1772.5		QPSK	-20.55	13.14	10.24	2.07	V		0.135	21.31
		16-QAM	-21.21	12.48	10.24	2.07	V		0.116	20.65
		64-QAM	-22.29	11.40	10.24	2.07	V		0.091	19.57
		256-QAM	-25.49	8.20	10.24	2.07	V		0.043	16.37

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/ B4 20 MHz	QPSK	-20.00	13.71	10.08	2.05	V	< 1.00	0.149	21.74
		16-QAM	-20.65	13.06	10.08	2.05	V		0.129	21.09
		64-QAM	-21.69	12.02	10.08	2.05	V		0.101	20.05
		256-QAM	-24.74	8.97	10.08	2.05	V		0.050	17.00
1745.0		QPSK	-20.89	12.83	10.18	2.06	V		0.125	20.95
		16-QAM	-21.56	12.16	10.18	2.06	V		0.107	20.28
		64-QAM	-22.66	11.06	10.18	2.06	V		0.083	19.18
		256-QAM	-25.66	8.06	10.18	2.06	V		0.042	16.18
1770.0		QPSK	-20.57	13.12	10.24	2.07	V		0.135	21.29
		16-QAM	-21.23	12.46	10.24	2.07	V		0.116	20.63
		64-QAM	-22.34	11.35	10.24	2.07	V		0.090	19.52
		256-QAM	-25.65	8.04	10.24	2.07	V		0.042	16.21

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1710.7 MHz
- ▣ MEASURED OUTPUT POWER: 22.37 dBm = 0.172 W
- ▣ MODE: LTE B66 / B4
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 35.37 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
131987 (1711.5)	3 423.00	-54.44	12.56	-61.17	2.95	H	-51.56	73.93
	5 134.50	-56.51	12.27	-54.01	3.67	H	-45.40	67.77
	6 846.00	-57.22	12.00	-50.54	4.25	V	-42.79	65.16
132322 (1745.0)	3 490.00	-53.63	12.42	-59.73	2.97	V	-50.28	72.65
	5 235.00	-55.47	12.71	-54.67	3.70	H	-45.65	68.02
	6 980.00	-56.11	11.52	-47.93	4.28	H	-40.69	63.05
132657 (1778.5)	3 557.00	-54.60	12.38	-60.44	3.01	V	-51.07	73.43
	5 335.50	-55.75	13.00	-55.04	3.74	H	-45.77	68.14
	7 114.00	-55.12	10.87	-46.02	4.34	H	-39.49	61.86

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	5.39
			16-QAM			6.14
			64-QAM			6.77
			256-QAM			6.53
	3 MHz		QPSK	15		5.32
			16-QAM			6.08
			64-QAM			6.62
			256-QAM			6.56
	5 MHz		QPSK	25		5.29
			16-QAM			6.06
			64-QAM			6.59
			256-QAM			6.57
	10 MHz		QPSK	50		5.34
			16-QAM			6.06
			64-QAM			6.56
			256-QAM			6.57
	15 MHz		QPSK	75		5.31
			16-QAM			6.03
			64-QAM			6.58
			256-QAM			6.54
20 MHz	QPSK	100	5.29			
	16-QAM		6.01			
	64-QAM		6.55			
	256-QAM		6.56			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 111 ~ 134.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0907
			16-QAM			1.0903
			64-QAM			1.0910
			256-QAM			1.0863
	3 MHz		QPSK	15		2.7129
			16-QAM			2.7000
			64-QAM			2.6975
			256-QAM			2.7043
	5 MHz		QPSK	25		4.5002
			16-QAM			4.4893
			64-QAM			4.5104
			256-QAM			4.5161
	10 MHz		QPSK	50		8.9660
			16-QAM			8.9600
			64-QAM			8.9765
			256-QAM			8.9886
	15 MHz		QPSK	75		13.447
			16-QAM			13.442
			64-QAM			13.457
			256-QAM			13.455
20 MHz	QPSK	100	17.991			
	16-QAM		17.886			
	64-QAM		17.949			
	256-QAM		17.931			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 87 ~ 110.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4213	27.976	-76.730	-48.754	-13.00
		1745.0	3.4896	27.976	-76.817	-48.841	
		1779.3	3.7074	27.976	-77.096	-49.120	
	3	1711.5	3.4213	27.976	-76.274	-48.298	
		1745.0	3.4881	27.976	-75.627	-47.651	
		1778.5	3.5599	27.976	-76.670	-48.694	
	5	1712.5	3.4213	27.976	-75.522	-47.546	
		1745.0	3.6920	27.976	-76.988	-49.012	
		1777.5	3.5599	27.976	-76.675	-48.699	
	10	1715.0	3.4218	27.976	-74.981	-47.005	
		1745.0	3.7039	27.976	-77.179	-49.203	
		1775.0	3.5594	27.976	-76.750	-48.774	
	15	1717.5	3.4223	27.976	-76.721	-48.745	
		1745.0	3.4776	27.976	-76.566	-48.590	
		1772.5	3.6770	27.976	-76.975	-48.999	
	20	1720.0	3.4228	27.976	-75.897	-47.921	
		1745.0	3.4726	27.976	-76.810	-48.834	
		1770.0	3.5584	27.976	-75.378	-47.402	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 135 ~ 170.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 51 ~ 86.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1710 699 993	0.0	0.000 000	0.000
100%		-30	1710 699 984	-8.6	-0.000 001	-0.005
100%		-20	1710 699 981	-12.0	-0.000 001	-0.007
100%		-10	1710 699 987	-5.8	0.000 000	-0.003
100%		0	1710 699 981	-11.3	-0.000 001	-0.007
100%		+10	1710 700 001	8.8	0.000 001	0.005
100%		+30	1710 699 998	5.6	0.000 000	0.003
100%		+40	1710 699 990	-2.5	0.000 000	-0.001
100%		+50	1710 699 987	-5.6	0.000 000	-0.003
Batt. Endpoint		3.650	+20	1710 699 982	-10.4	-0.000 001

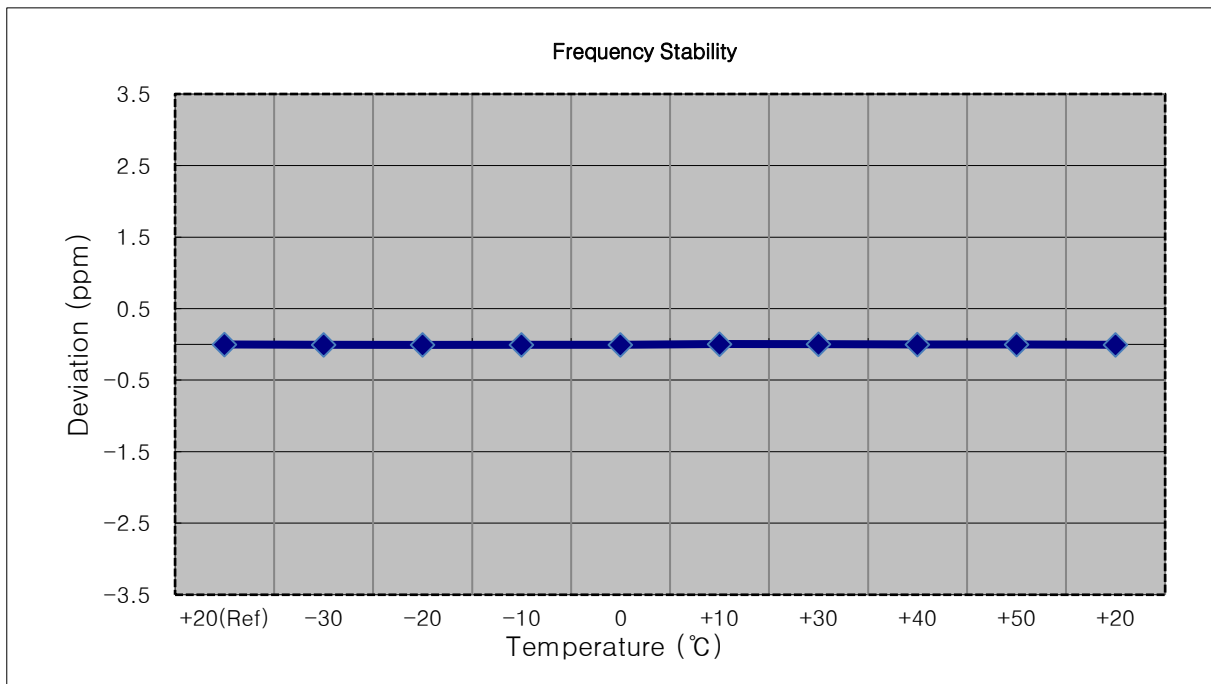


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1711 499 990	0.0	0.000 000	0.000
100%		-30	1711 499 975	-15.5	-0.000 001	-0.009
100%		-20	1711 499 985	-5.3	0.000 000	-0.003
100%		-10	1711 499 977	-13.5	-0.000 001	-0.008
100%		0	1711 499 976	-14.4	-0.000 001	-0.008
100%		+10	1711 499 972	-17.8	-0.000 001	-0.010
100%		+30	1711 499 993	3.0	0.000 000	0.002
100%		+40	1711 499 984	-6.0	0.000 000	-0.004
100%		+50	1711 499 980	-9.7	-0.000 001	-0.006
Batt. Endpoint	3.650	+20	1711 499 975	-15.6	-0.000 001	-0.009

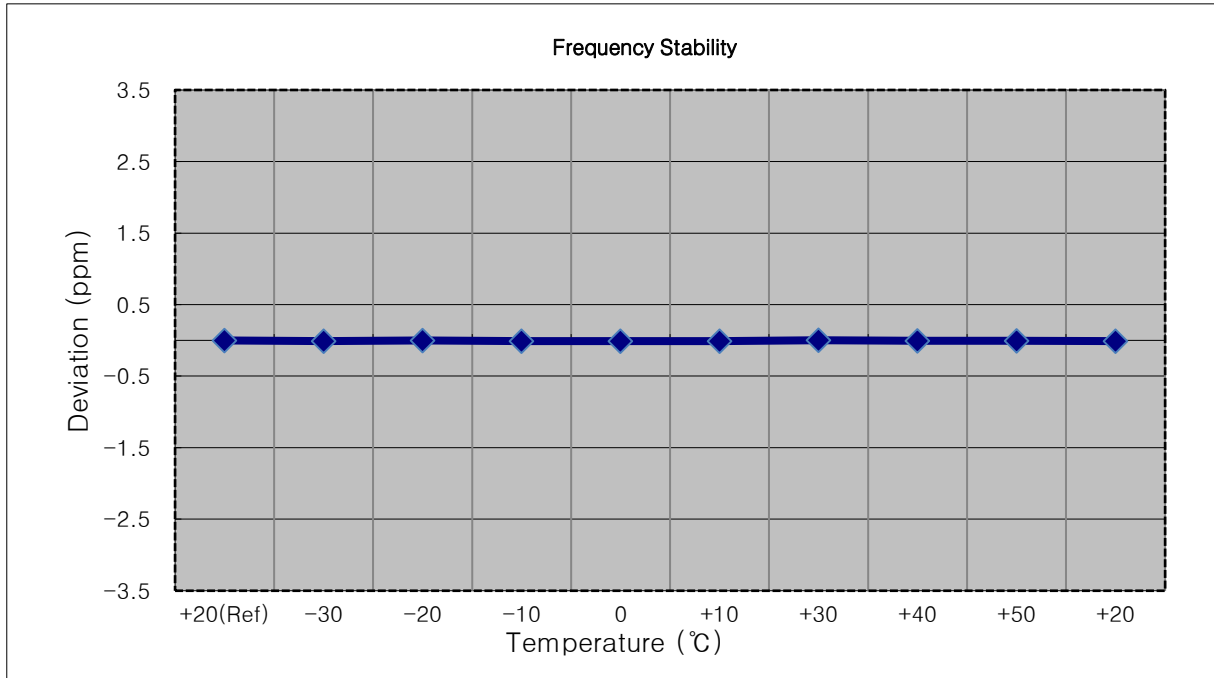


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1712 499 985	0.0	0.000 000	0.000
100%		-30	1712 499 966	-18.7	-0.000 001	-0.011
100%		-20	1712 499 981	-4.3	0.000 000	-0.003
100%		-10	1712 499 979	-5.6	0.000 000	-0.003
100%		0	1712 499 974	-11.3	-0.000 001	-0.007
100%		+10	1712 499 974	-11.1	-0.000 001	-0.006
100%		+30	1712 499 970	-15.1	-0.000 001	-0.009
100%		+40	1712 499 969	-15.6	-0.000 001	-0.009
100%		+50	1712 499 981	-4.2	0.000 000	-0.002
Batt. Endpoint	3.650	+20	1712 499 968	-16.7	-0.000 001	-0.010

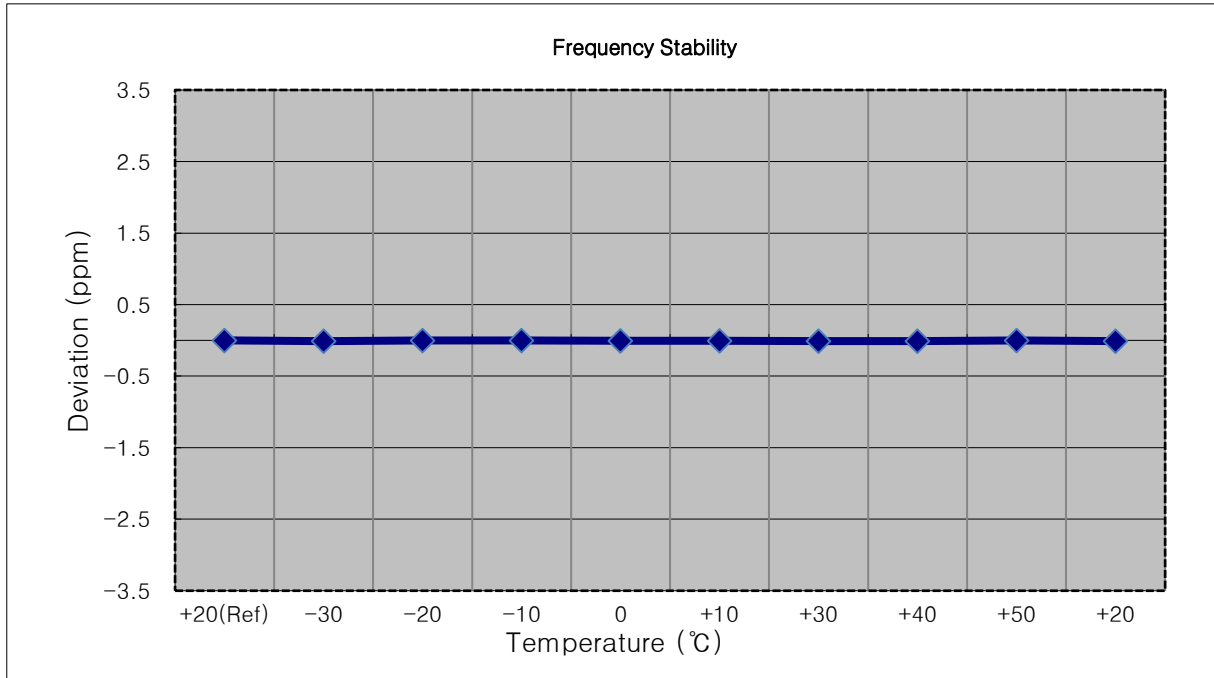


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1714 999 992	0.0	0.000 000	0.000
100%		-30	1714 999 982	-9.7	-0.000 001	-0.006
100%		-20	1714 999 995	3.3	0.000 000	0.002
100%		-10	1714 999 989	-2.9	0.000 000	-0.002
100%		0	1714 999 990	-2.3	0.000 000	-0.001
100%		+10	1714 999 989	-2.6	0.000 000	-0.002
100%		+30	1714 999 984	-8.1	0.000 000	-0.005
100%		+40	1714 999 979	-12.7	-0.000 001	-0.007
100%		+50	1715 000 000	8.2	0.000 000	0.005
Batt. Endpoint	3.650	+20	1714 999 980	-12.1	-0.000 001	-0.007

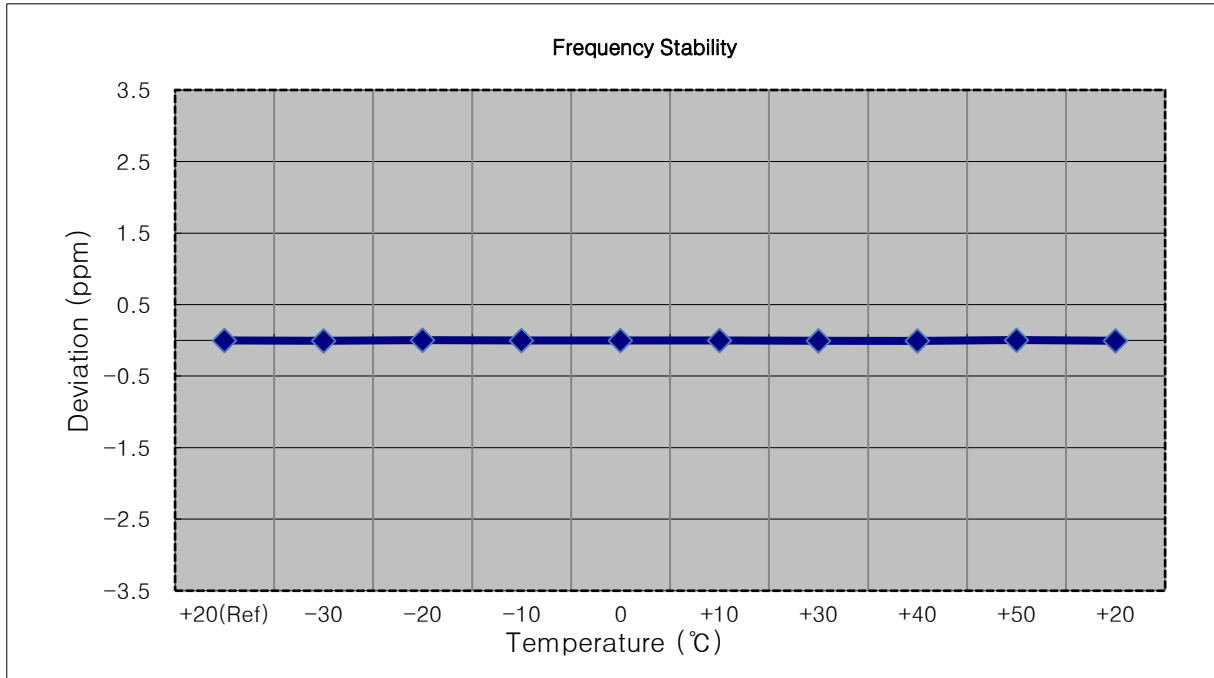


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1717 499 994	0.0	0.000 000	0.000
100%		-30	1717 499 983	-11.0	-0.000 001	-0.006
100%		-20	1717 499 984	-10.4	-0.000 001	-0.006
100%		-10	1717 499 999	4.9	0.000 000	0.003
100%		0	1717 499 991	-2.7	0.000 000	-0.002
100%		+10	1717 499 986	-7.9	0.000 000	-0.005
100%		+30	1717 500 001	6.6	0.000 000	0.004
100%		+40	1717 499 990	-4.1	0.000 000	-0.002
100%		+50	1717 499 984	-10.1	-0.000 001	-0.006
Batt. Endpoint	3.650	+20	1717 499 981	-13.3	-0.000 001	-0.008

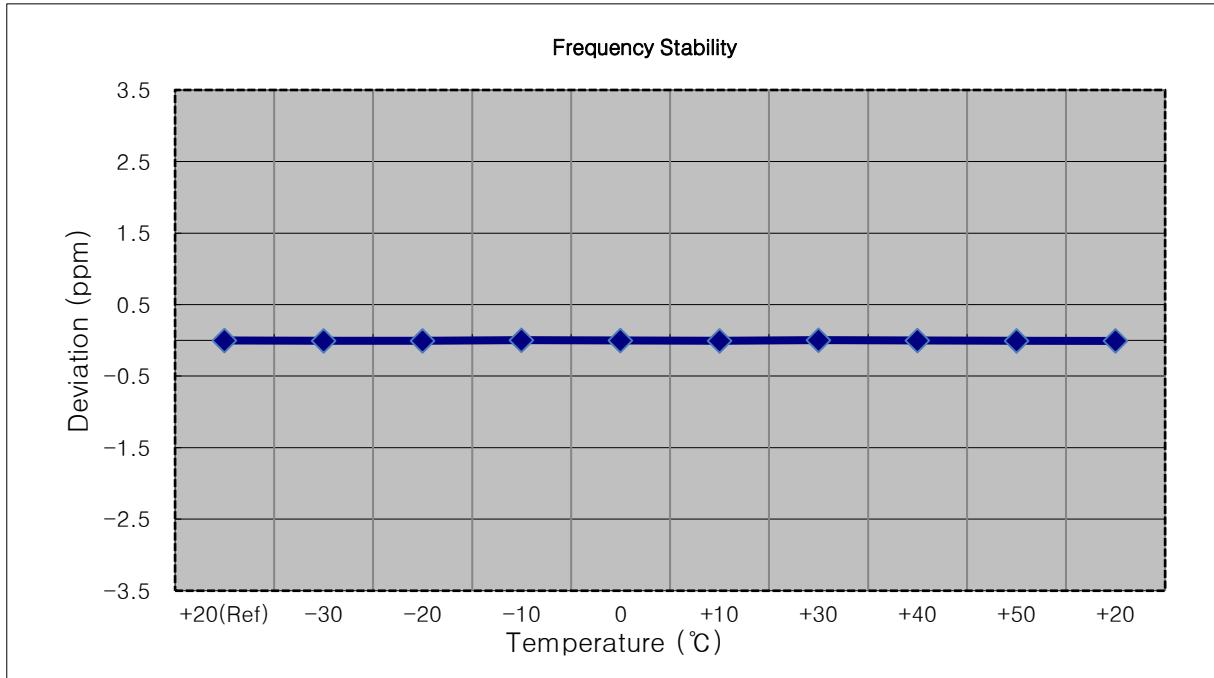


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1719 999 988	0.0	0.000 000	0.000
100%		-30	1719 999 995	7.6	0.000 000	0.004
100%		-20	1719 999 993	5.6	0.000 000	0.003
100%		-10	1719 999 991	3.0	0.000 000	0.002
100%		0	1719 999 992	3.7	0.000 000	0.002
100%		+10	1719 999 989	1.5	0.000 000	0.001
100%		+30	1719 999 992	4.4	0.000 000	0.003
100%		+40	1719 999 984	-3.9	0.000 000	-0.002
100%		+50	1719 999 981	-7.2	0.000 000	-0.004
Batt. Endpoint		3.650	+20	1719 999 980	-7.9	0.000 000

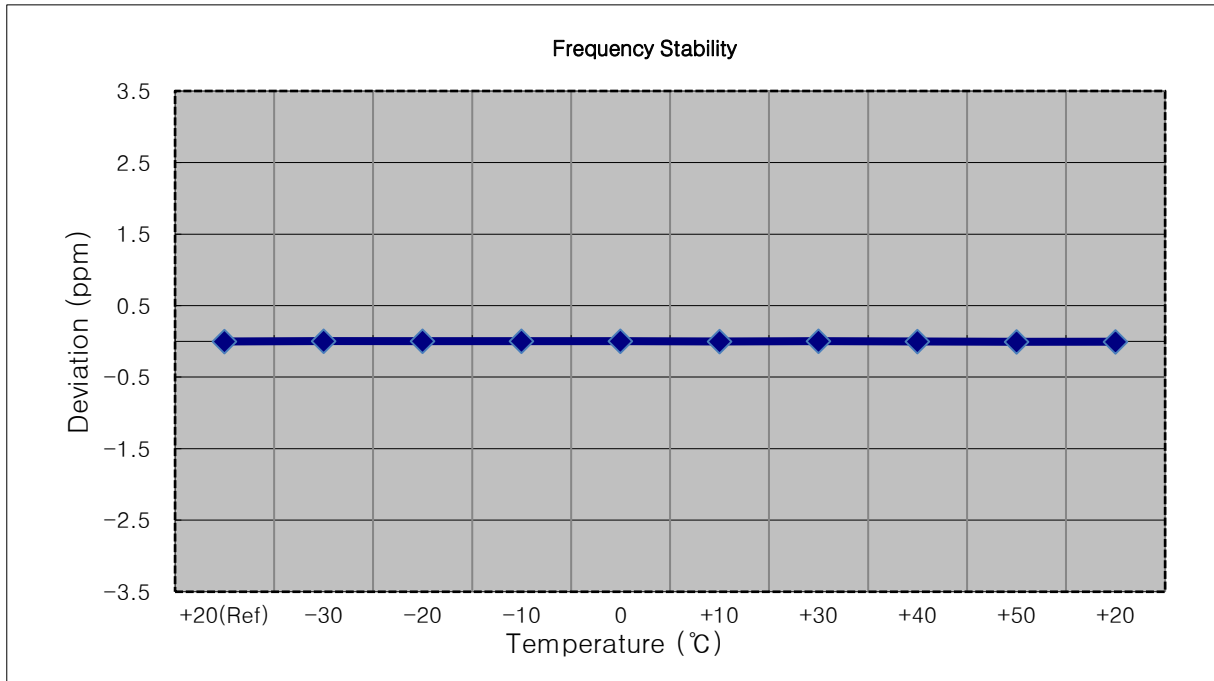


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1745 000 009	0.0	0.000 000	0.000
100%		-30	1745 000 014	4.6	0.000 000	0.003
100%		-20	1745 000 012	3.4	0.000 000	0.002
100%		-10	1745 000 012	3.3	0.000 000	0.002
100%		0	1745 000 006	-2.9	0.000 000	-0.002
100%		+10	1745 000 002	-6.6	0.000 000	-0.004
100%		+30	1745 000 003	-6.4	0.000 000	-0.004
100%		+40	1745 000 001	-8.4	0.000 000	-0.005
100%		+50	1745 000 000	-8.8	-0.000 001	-0.005
Batt. Endpoint	3.650	+20	1745 000 000	-9.2	-0.000 001	-0.005

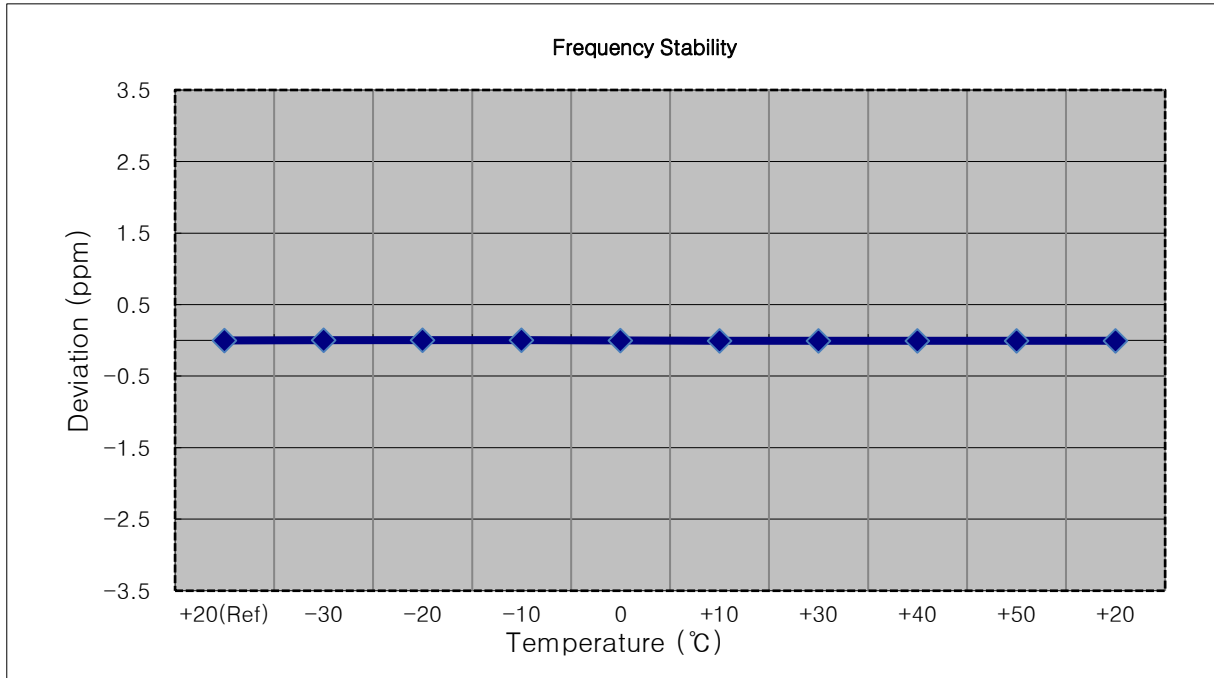


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100%		-30	1744 999 992	-4.7	0.000 000	-0.003
100%		-20	1744 999 993	-3.1	0.000 000	-0.002
100%		-10	1744 999 994	-2.2	0.000 000	-0.001
100%		0	1744 999 994	-2.1	0.000 000	-0.001
100%		+10	1744 999 994	-2.6	0.000 000	-0.001
100%		+30	1744 999 993	-3.2	0.000 000	-0.002
100%		+40	1744 999 994	-1.9	0.000 000	-0.001
100%		+50	1744 999 991	-5.7	0.000 000	-0.003
Batt. Endpoint	3.650	+20	1744 999 990	-6.7	0.000 000	-0.004

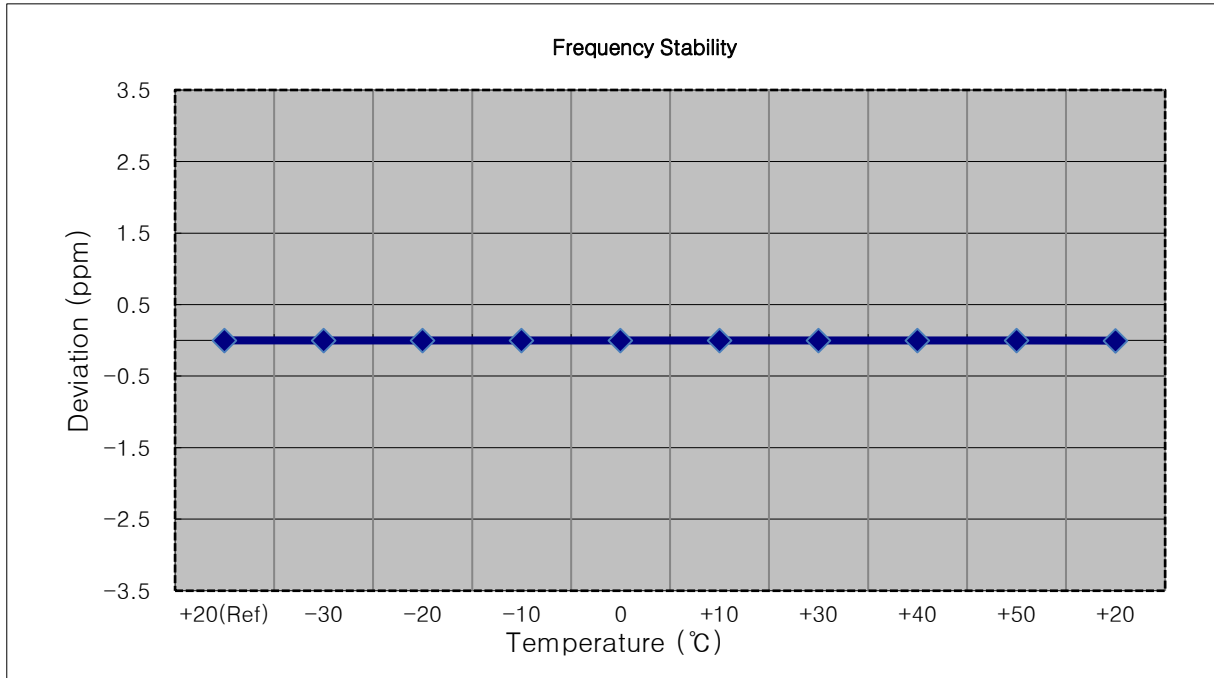


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1744 999 993	0.0	0.000 000	0.000
100%		-30	1744 999 988	-4.6	0.000 000	-0.003
100%		-20	1744 999 996	3.0	0.000 000	0.002
100%		-10	1744 999 995	1.6	0.000 000	0.001
100%		0	1745 000 000	7.2	0.000 000	0.004
100%		+10	1744 999 999	6.0	0.000 000	0.003
100%		+30	1744 999 999	5.9	0.000 000	0.003
100%		+40	1745 000 001	7.7	0.000 000	0.004
100%		+50	1745 000 002	9.2	0.000 001	0.005
Batt. Endpoint	3.650	+20	1744 999 982	-10.7	-0.000 001	-0.006

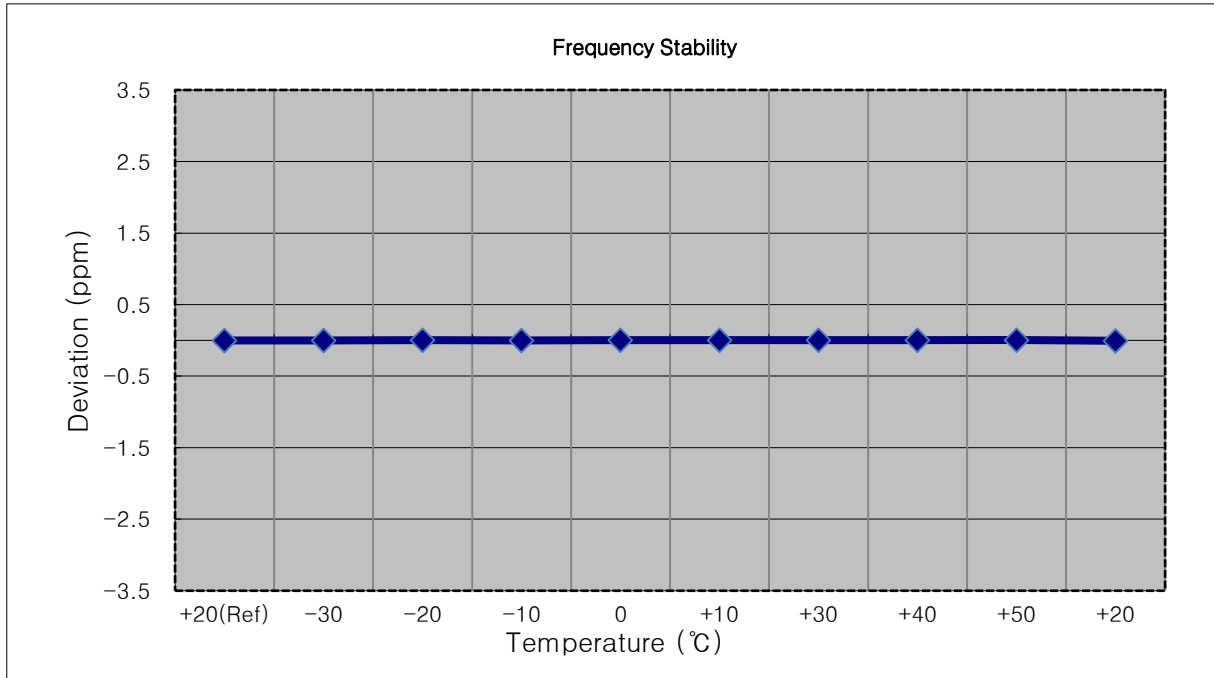


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1745 000 006	0.0	0.000 000	0.000
100%		-30	1744 999 997	-9.5	-0.000 001	-0.005
100%		-20	1744 999 999	-7.8	0.000 000	-0.004
100%		-10	1745 000 003	-3.4	0.000 000	-0.002
100%		0	1745 000 003	-3.5	0.000 000	-0.002
100%		+10	1745 000 013	6.7	0.000 000	0.004
100%		+30	1745 000 012	5.9	0.000 000	0.003
100%		+40	1745 000 015	8.9	0.000 001	0.005
100%		+50	1745 000 012	6.1	0.000 000	0.003
Batt. Endpoint	3.650	+20	1745 000 010	3.7	0.000 000	0.002

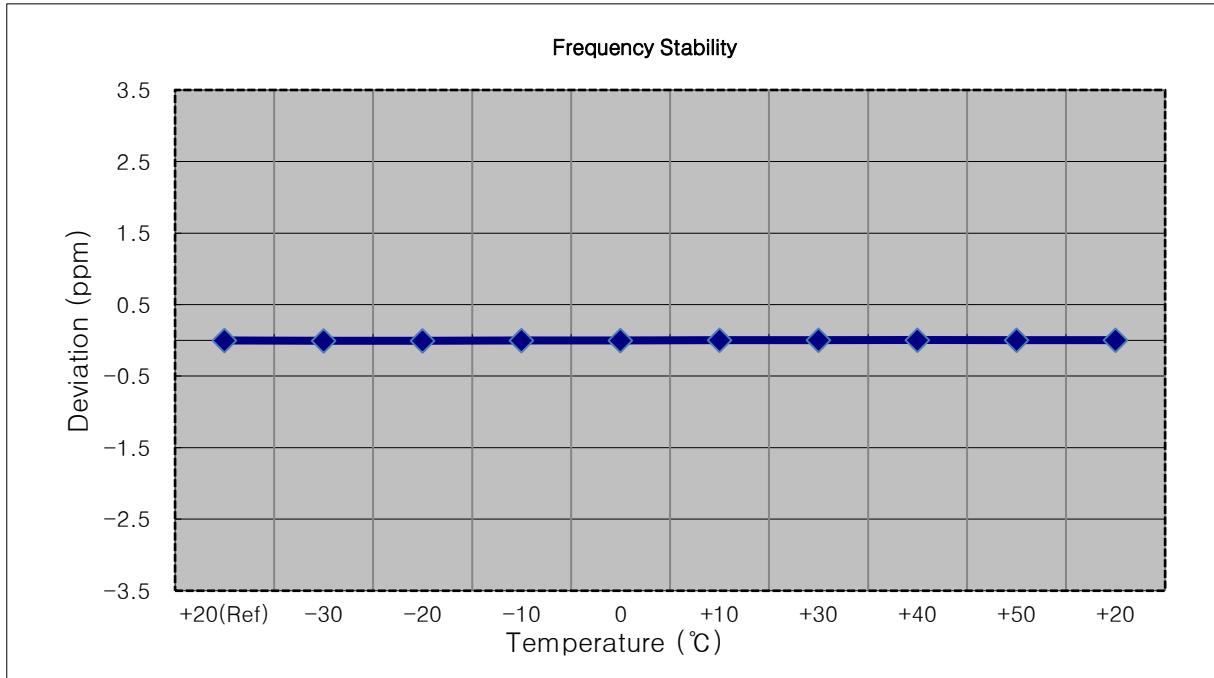


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1744 999 994	0.0	0.000 000	0.000
100%		-30	1744 999 991	-3.2	0.000 000	-0.002
100%		-20	1745 000 000	6.2	0.000 000	0.004
100%		-10	1744 999 997	3.0	0.000 000	0.002
100%		0	1744 999 997	3.4	0.000 000	0.002
100%		+10	1744 999 997	3.1	0.000 000	0.002
100%		+30	1745 000 000	6.1	0.000 000	0.003
100%		+40	1744 999 998	4.7	0.000 000	0.003
100%		+50	1745 000 000	6.5	0.000 000	0.004
Batt. Endpoint	3.650	+20	1744 999 983	-10.6	-0.000 001	-0.006

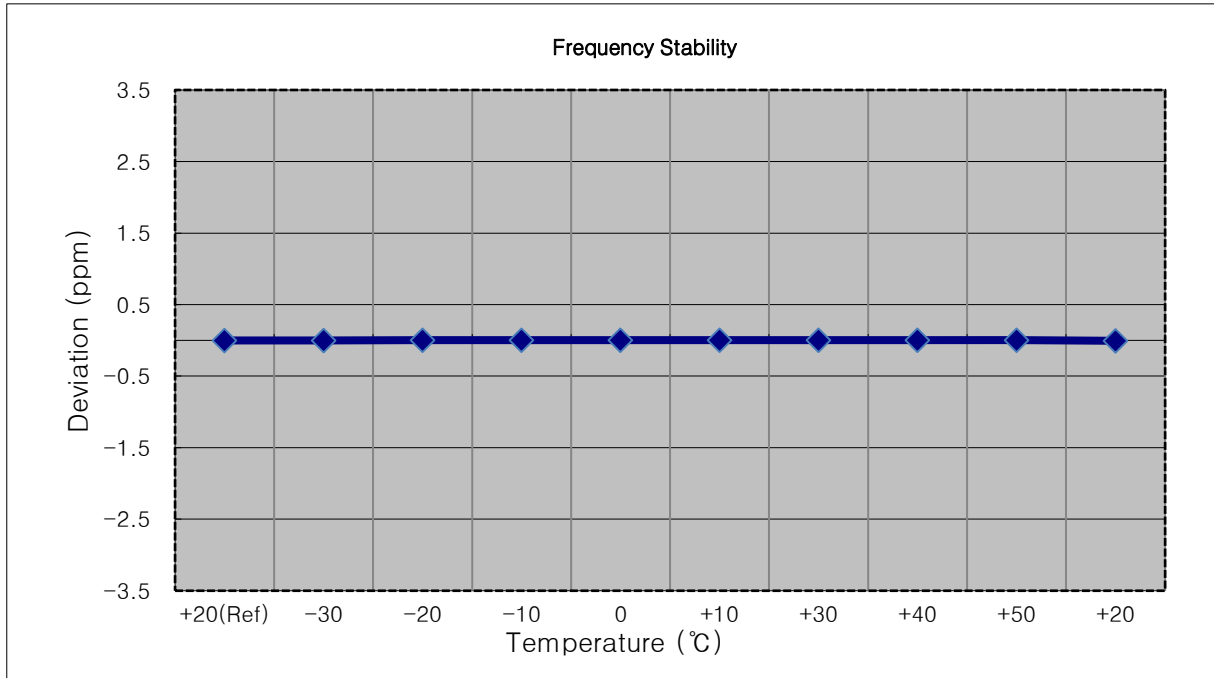


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1744 999 989	0.0	0.000 000	0.000
100%		-30	1744 999 979	-10.1	-0.000 001	-0.006
100%		-20	1744 999 991	2.4	0.000 000	0.001
100%		-10	1744 999 993	3.9	0.000 000	0.002
100%		0	1744 999 997	7.8	0.000 000	0.004
100%		+10	1744 999 979	-9.6	-0.000 001	-0.006
100%		+30	1744 999 981	-8.3	0.000 000	-0.005
100%		+40	1744 999 982	-7.0	0.000 000	-0.004
100%		+50	1744 999 984	-5.4	0.000 000	-0.003
Batt. Endpoint	3.650	+20	1744 999 992	3.1	0.000 000	0.002

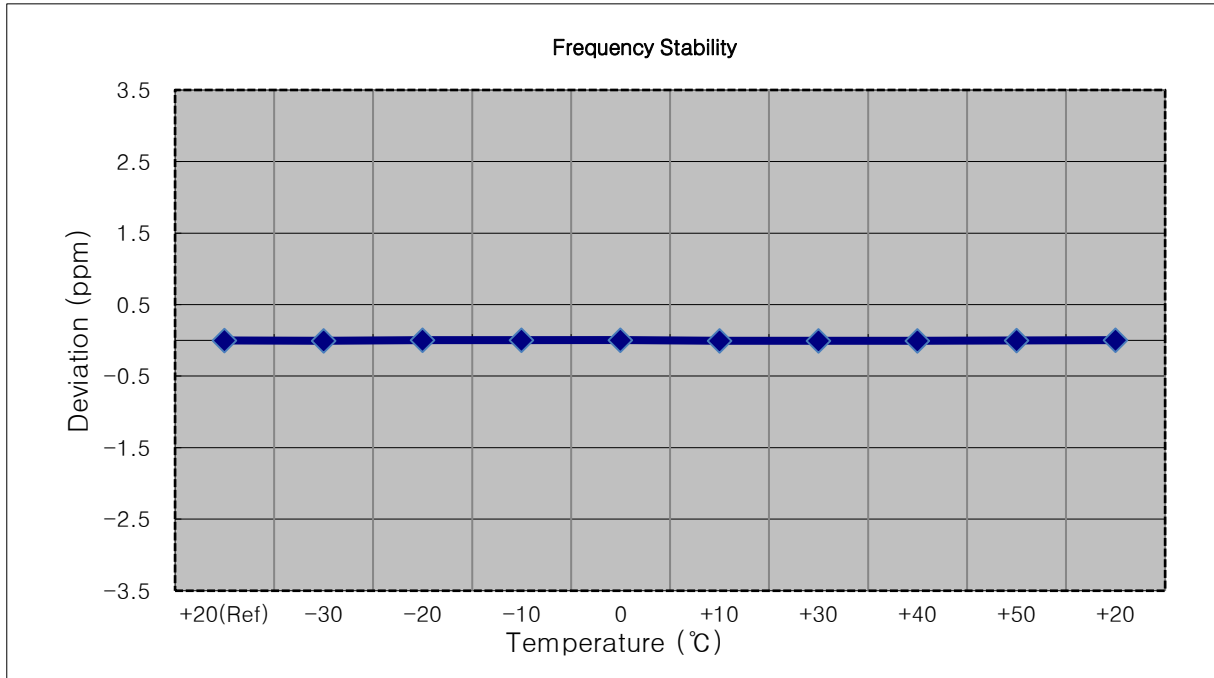


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1779 299 995	0.0	0.000 000	0.000
100%		-30	1779 299 988	-6.4	0.000 000	-0.004
100%		-20	1779 299 985	-9.5	-0.000 001	-0.005
100%		-10	1779 299 982	-12.4	-0.000 001	-0.007
100%		0	1779 299 983	-11.9	-0.000 001	-0.007
100%		+10	1779 300 003	7.7	0.000 000	0.004
100%		+30	1779 300 008	13.4	0.000 001	0.008
100%		+40	1779 300 003	8.2	0.000 000	0.005
100%		+50	1779 299 989	-5.4	0.000 000	-0.003
Batt. Endpoint	3.650	+20	1779 299 990	-5.3	0.000 000	-0.003

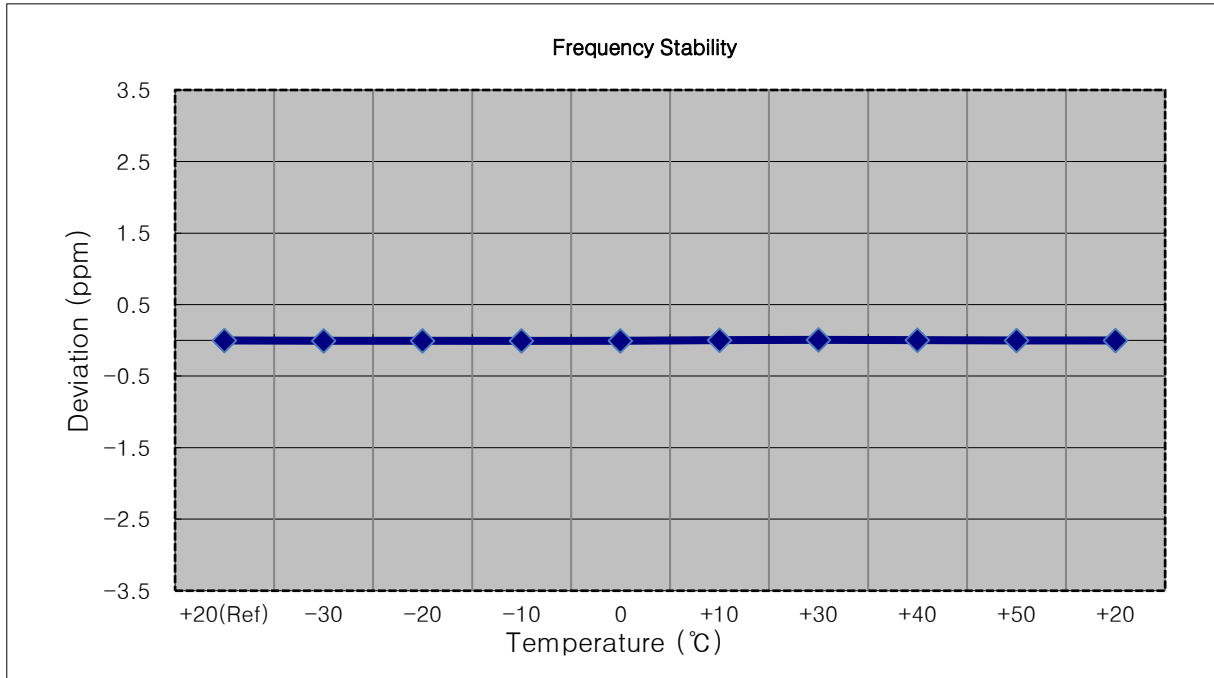


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1778 499 987	0.0	0.000 000	0.000
100%		-30	1778 499 972	-14.9	-0.000 001	-0.008
100%		-20	1778 500 006	18.6	0.000 001	0.010
100%		-10	1778 500 005	18.0	0.000 001	0.010
100%		0	1778 499 993	6.0	0.000 000	0.003
100%		+10	1778 499 979	-8.0	0.000 000	-0.004
100%		+30	1778 499 977	-9.9	-0.000 001	-0.006
100%		+40	1778 499 972	-14.7	-0.000 001	-0.008
100%		+50	1778 499 973	-13.6	-0.000 001	-0.008
Batt. Endpoint	3.650	+20	1778 499 999	12.2	0.000 001	0.007

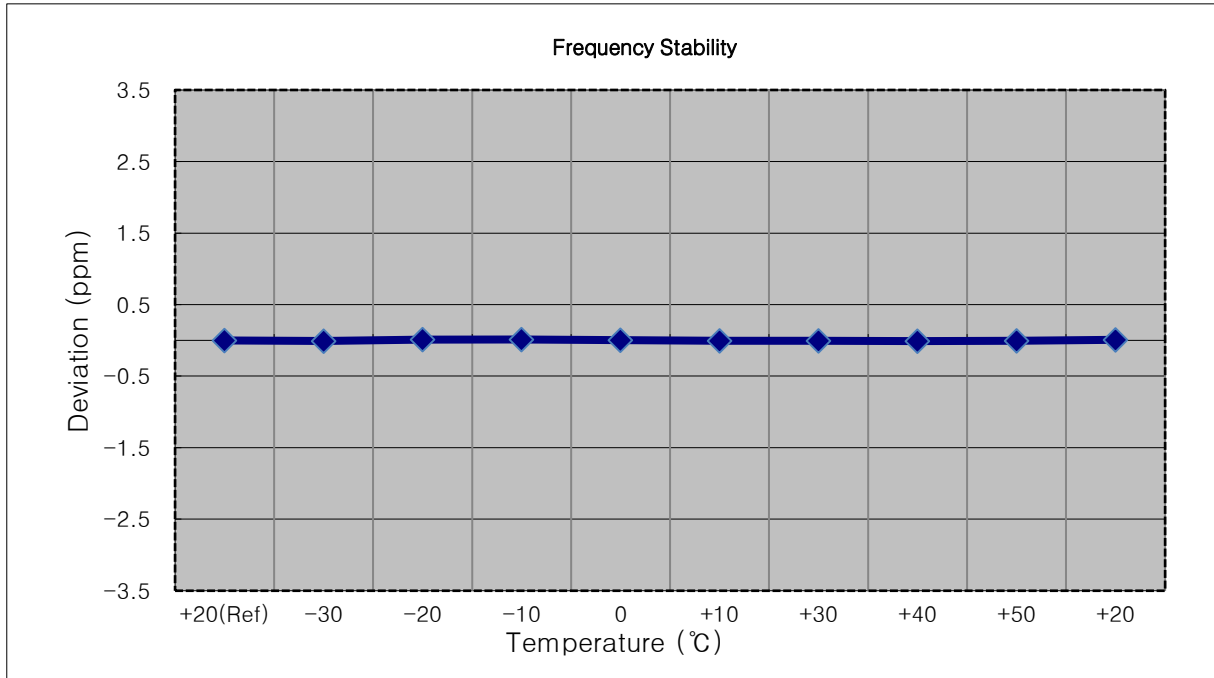


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1777 500 006	0.0	0.000 000	0.000
100%		-30	1777 500 014	7.9	0.000 000	0.004
100%		-20	1777 500 010	4.1	0.000 000	0.002
100%		-10	1777 500 009	2.8	0.000 000	0.002
100%		0	1777 500 011	4.2	0.000 000	0.002
100%		+10	1777 500 010	3.2	0.000 000	0.002
100%		+30	1777 500 000	-6.1	0.000 000	-0.003
100%		+40	1777 499 997	-9.3	-0.000 001	-0.005
100%		+50	1777 500 016	10.1	0.000 001	0.006
Batt. Endpoint	3.650	+20	1777 500 017	10.2	0.000 001	0.006

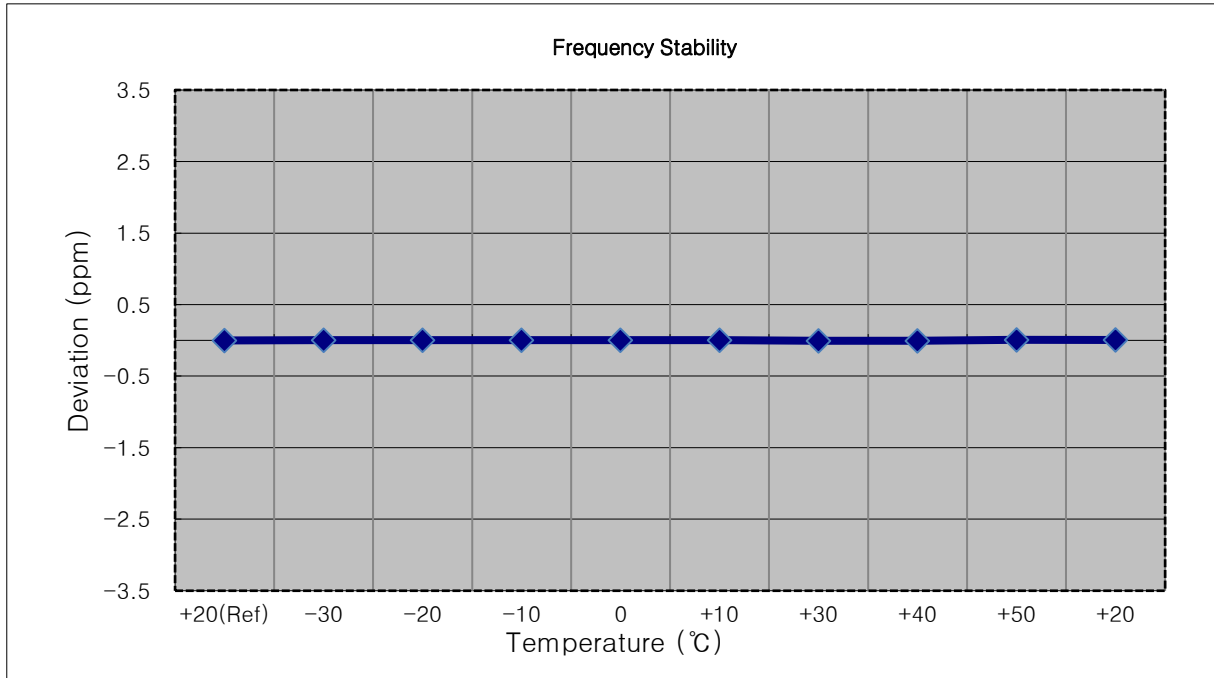


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1775 000 005	0.0	0.000 000	0.000
100%		-30	1775 000 011	6.0	0.000 000	0.003
100%		-20	1775 000 007	1.5	0.000 000	0.001
100%		-10	1774 999 999	-5.7	0.000 000	-0.003
100%		0	1774 999 994	-11.0	-0.000 001	-0.006
100%		+10	1774 999 994	-11.1	-0.000 001	-0.006
100%		+30	1775 000 010	5.0	0.000 000	0.003
100%		+40	1775 000 008	2.8	0.000 000	0.002
100%		+50	1775 000 001	-3.7	0.000 000	-0.002
Batt. Endpoint		3.650	+20	1775 000 009	3.7	0.000 000

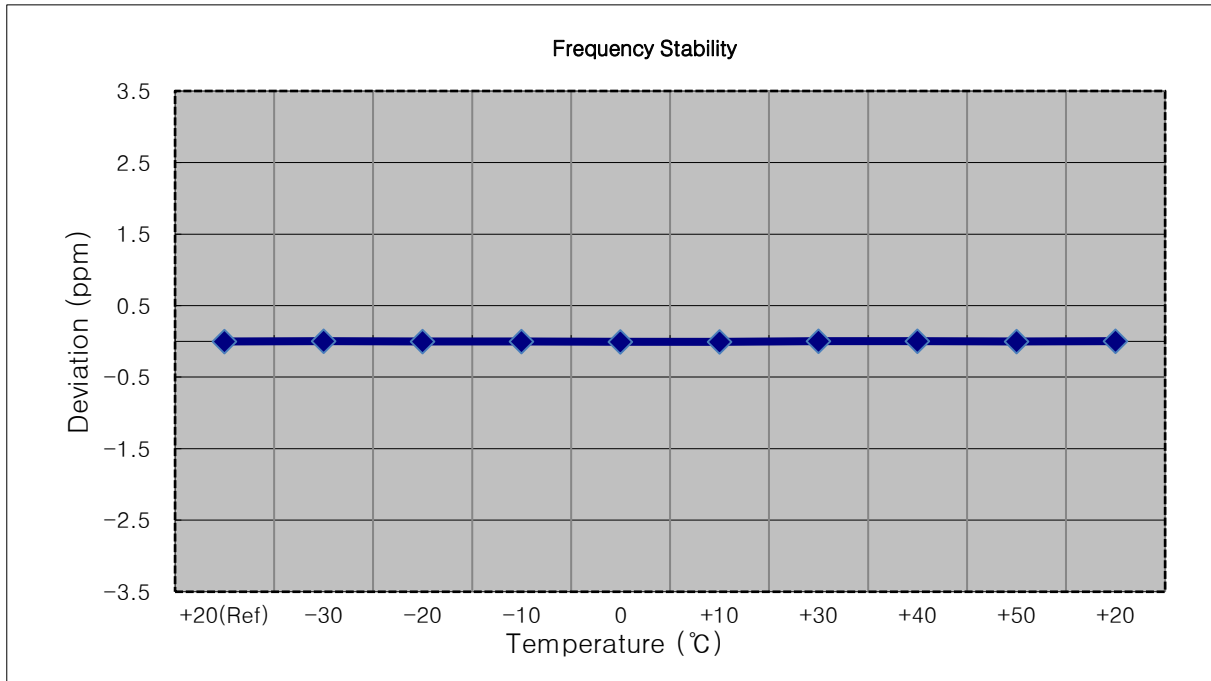


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1772 499 986	0.0	0.000 000	0.000
100%		-30	1772 499 968	-18.6	-0.000 001	-0.010
100%		-20	1772 499 978	-8.6	0.000 000	-0.005
100%		-10	1772 499 974	-12.9	-0.000 001	-0.007
100%		0	1772 499 992	5.4	0.000 000	0.003
100%		+10	1772 499 973	-13.6	-0.000 001	-0.008
100%		+30	1772 499 974	-12.7	-0.000 001	-0.007
100%		+40	1772 499 976	-10.2	-0.000 001	-0.006
100%		+50	1772 499 980	-6.5	0.000 000	-0.004
Batt. Endpoint		3.650	+20	1772 499 980	-6.5	0.000 000

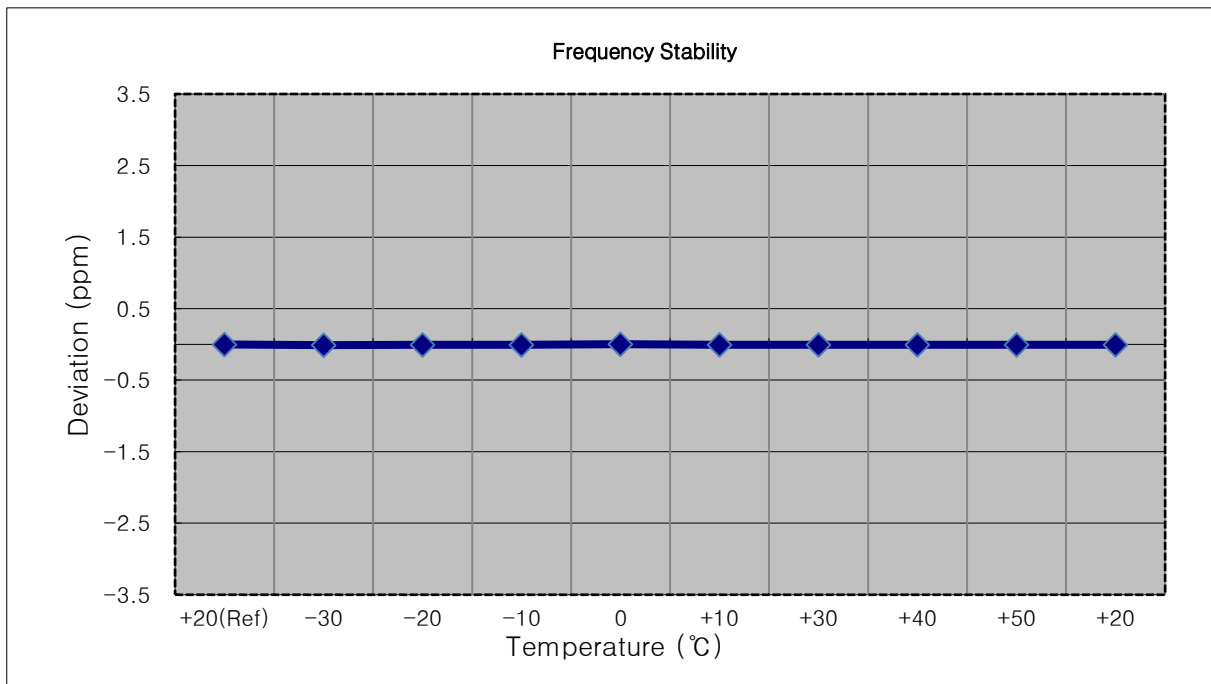

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 4.200 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	4.200	+20(Ref)	1769 999 985	0.0	0.000 000	0.000
100%		-30	1769 999 964	-21.3	-0.000 001	-0.012
100%		-20	1769 999 977	-8.6	0.000 000	-0.005
100%		-10	1769 999 971	-13.8	-0.000 001	-0.008
100%		0	1769 999 981	-4.2	0.000 000	-0.002
100%		+10	1769 999 975	-10.3	-0.000 001	-0.006
100%		+30	1769 999 971	-14.3	-0.000 001	-0.008
100%		+40	1769 999 968	-17.3	-0.000 001	-0.010
100%		+50	1769 999 967	-18.2	-0.000 001	-0.010
Batt. Endpoint	3.650	+20	1769 999 969	-15.7	-0.000 001	-0.009

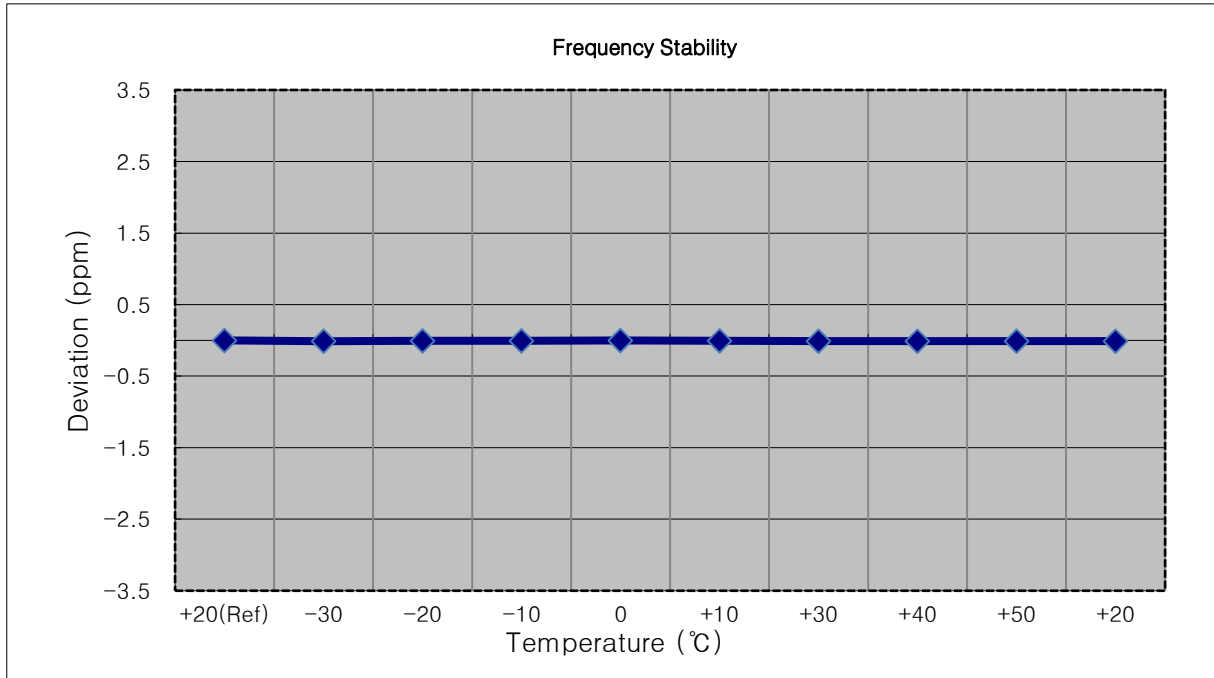


9. TEST PLOTS

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

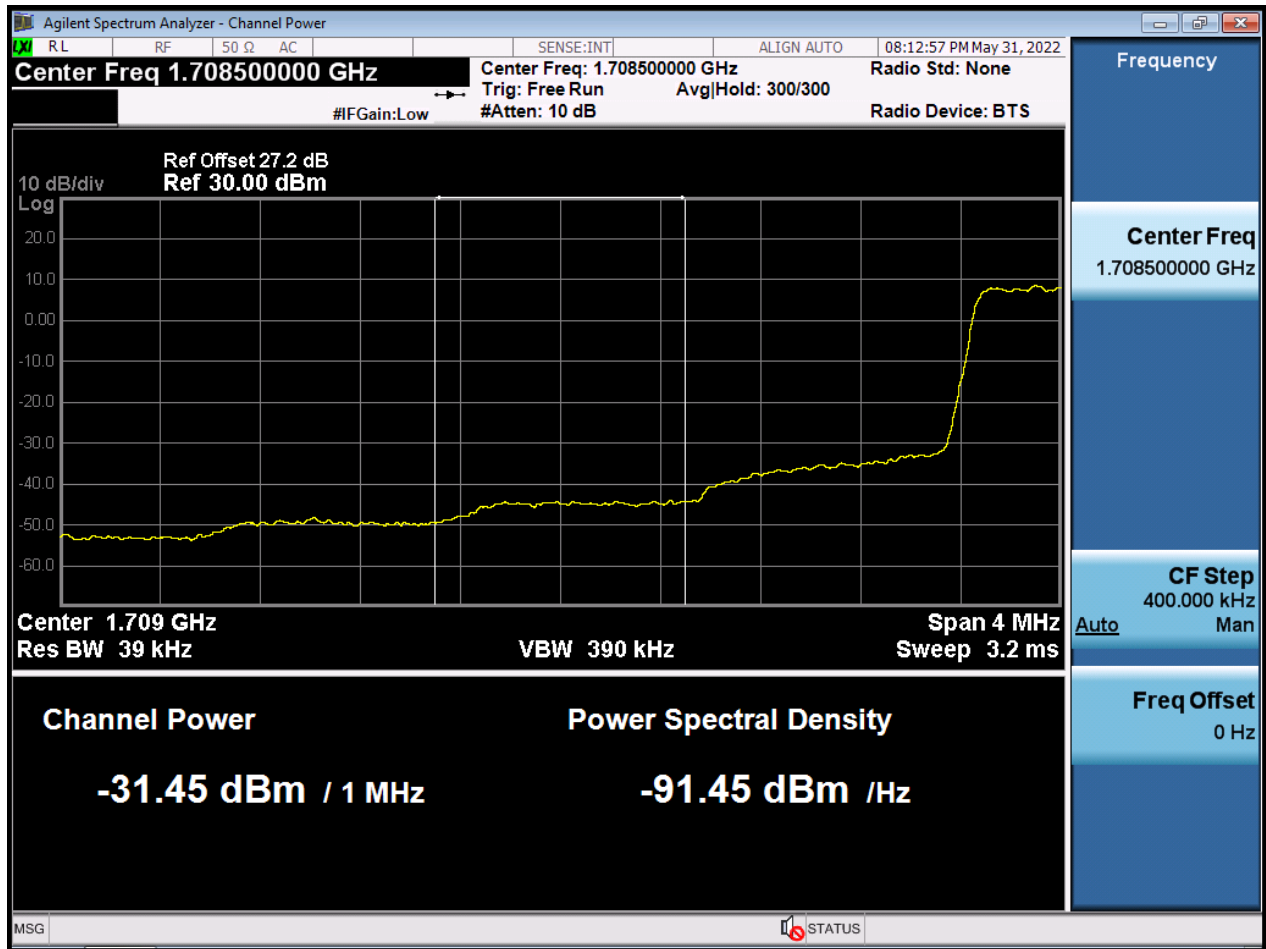


BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2)




BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

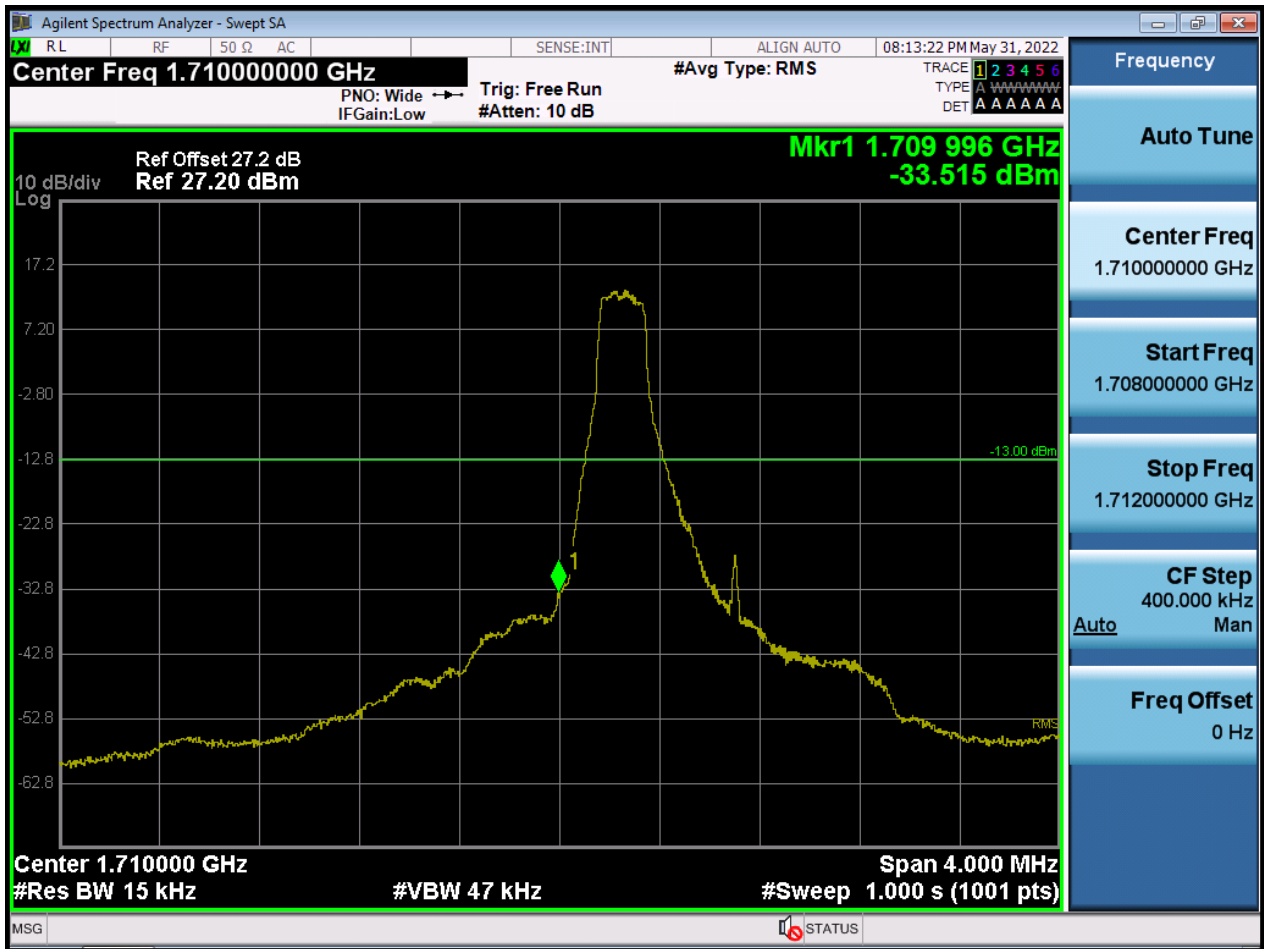

BW1.4 M_BandEdge_Highest Channel_QPSK_1RB

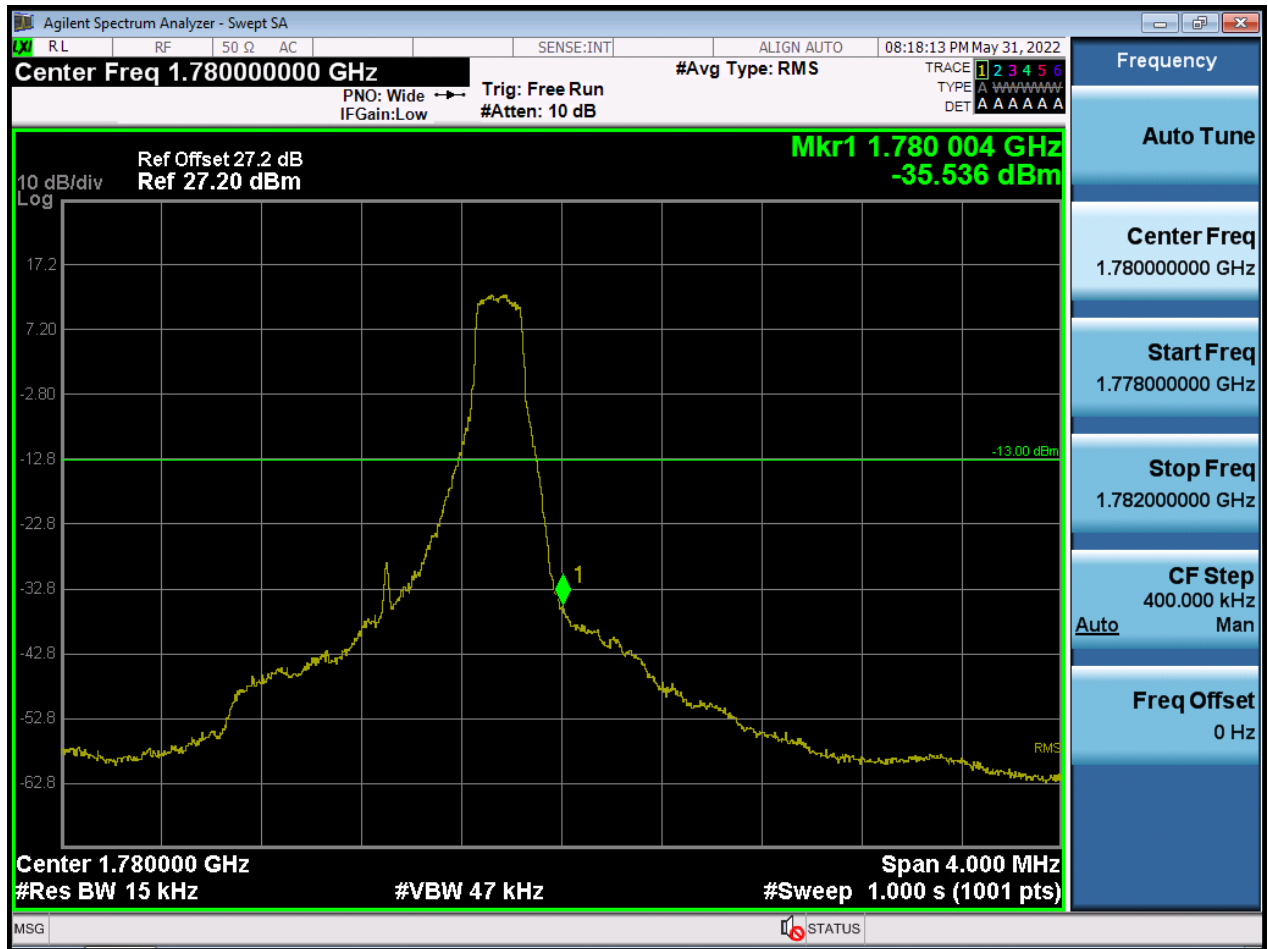


BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

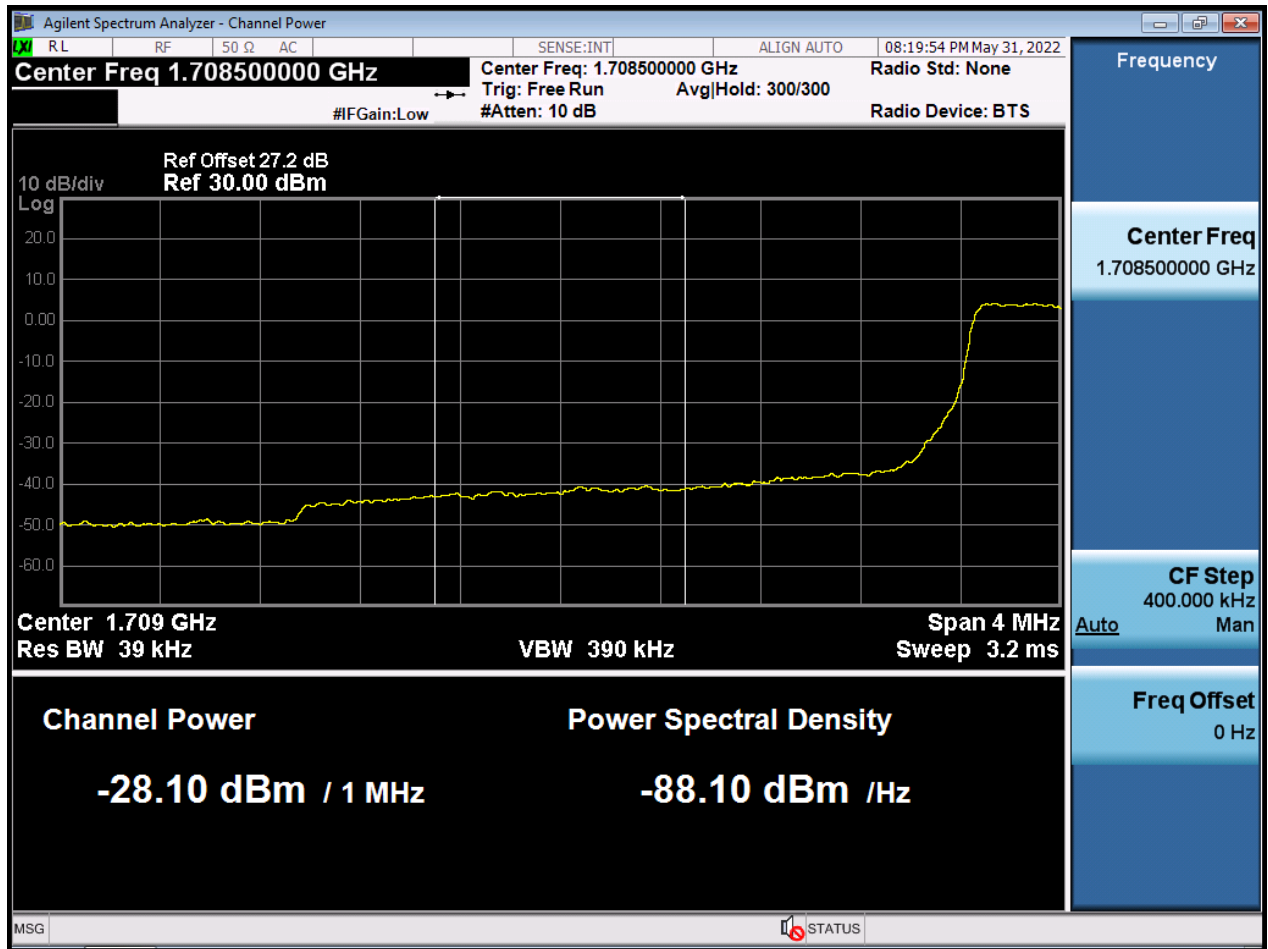


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)



BW3 M_BandEdge_Lowest Channel_QPSK_1RB

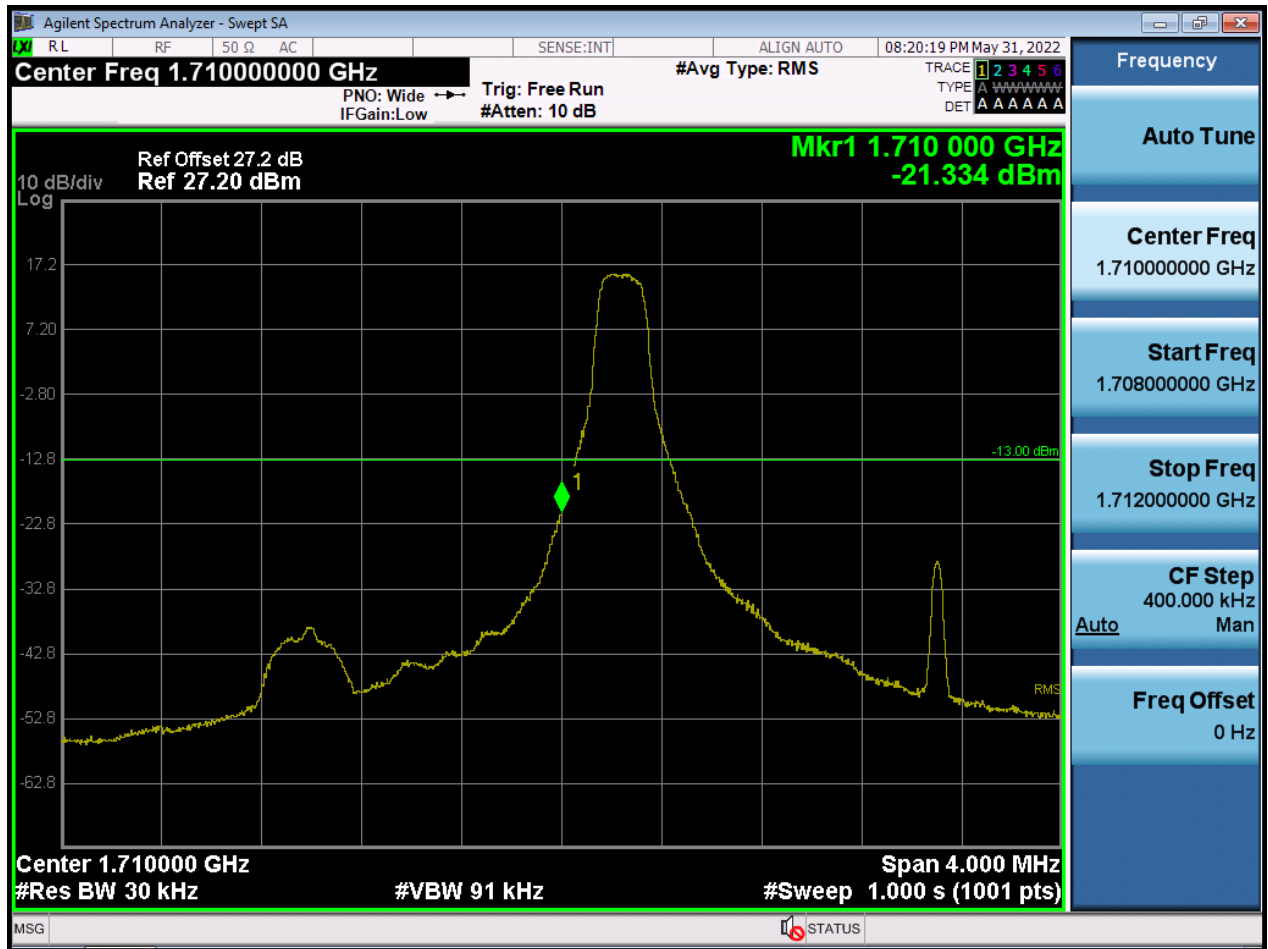


BW3 M_BandEdge_Highest Channel_QPSK_1RB

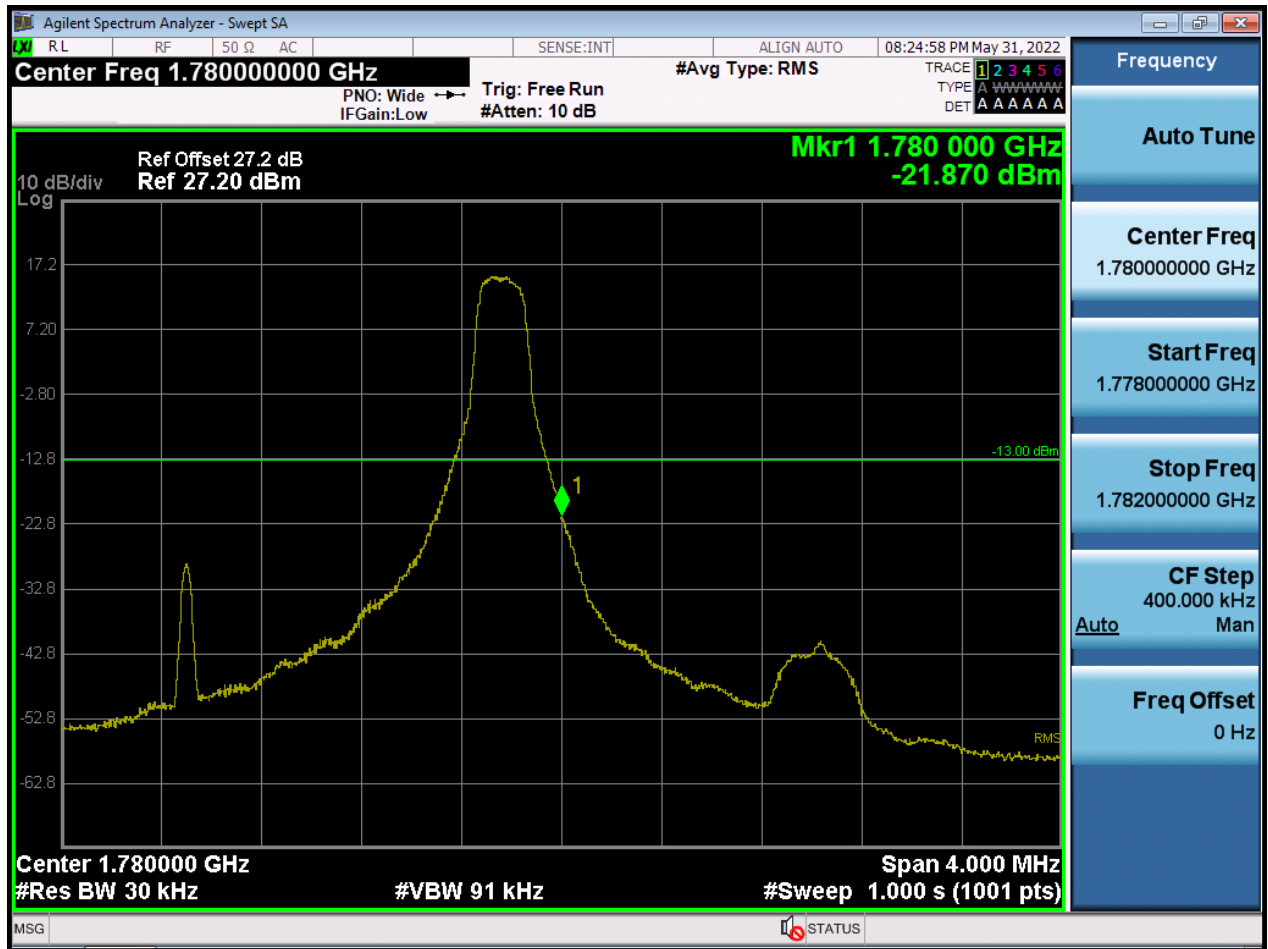

BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

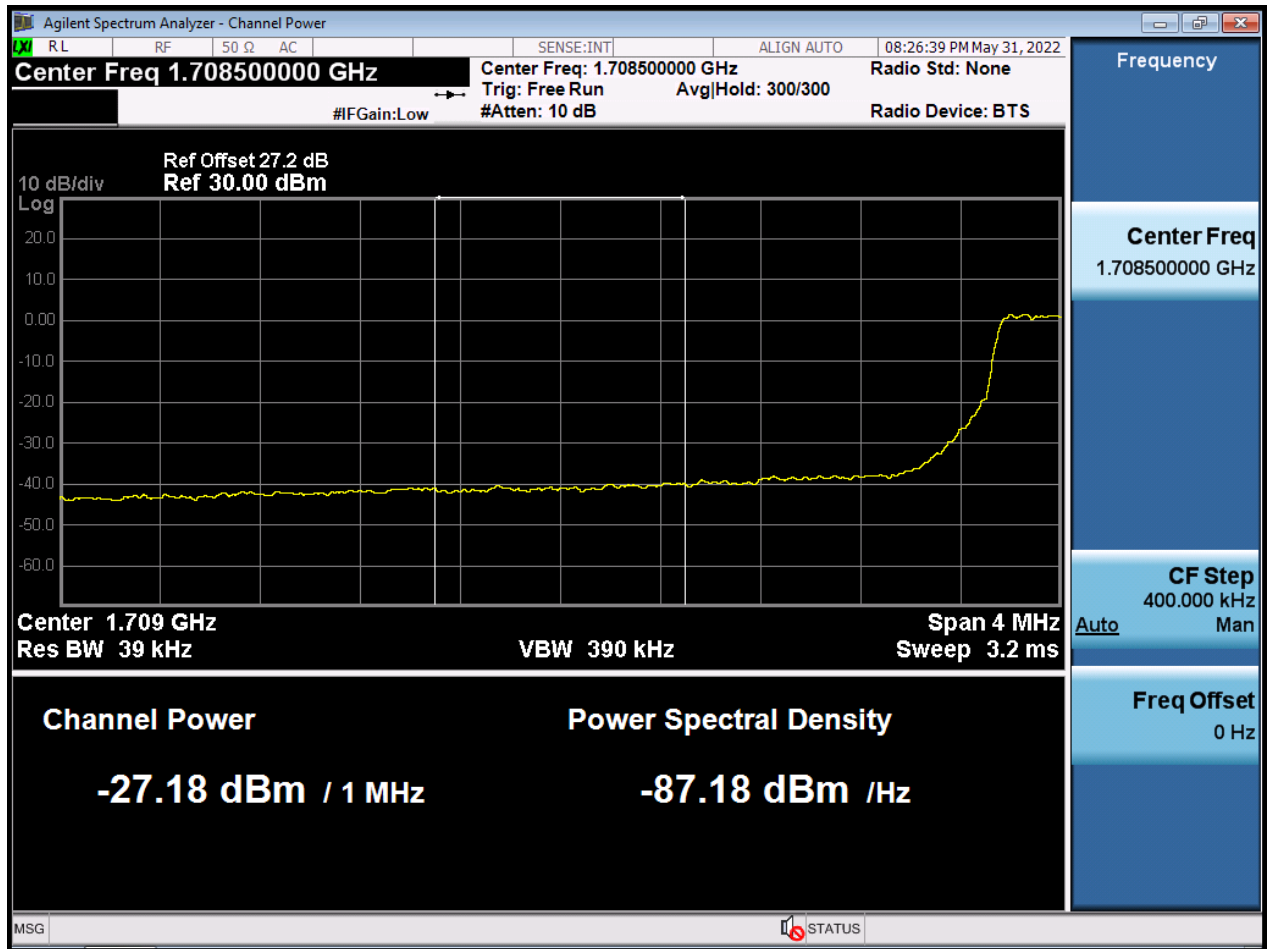


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

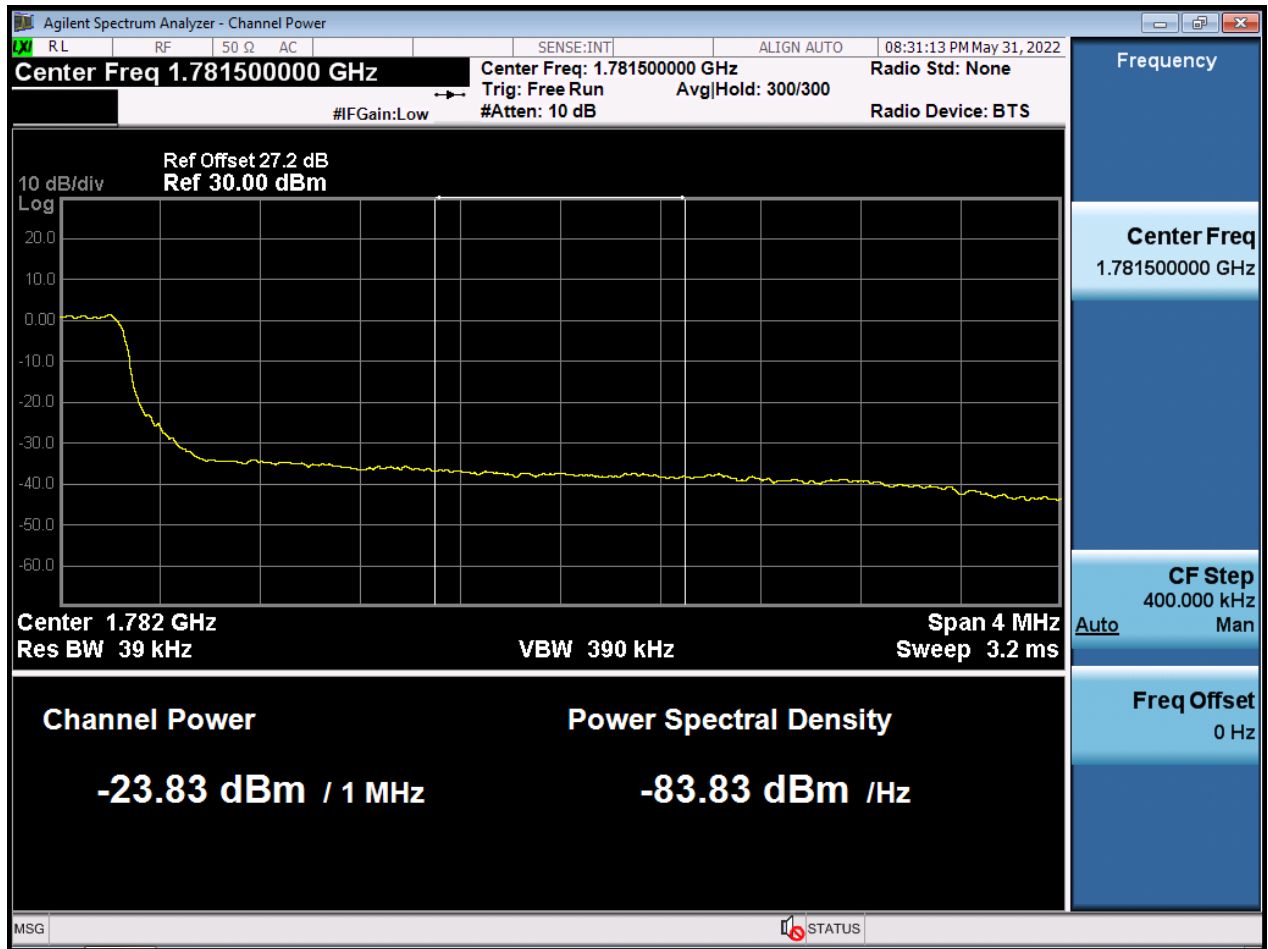

BW5 M_BandEdge_Lowest Channel_QPSK_1RB

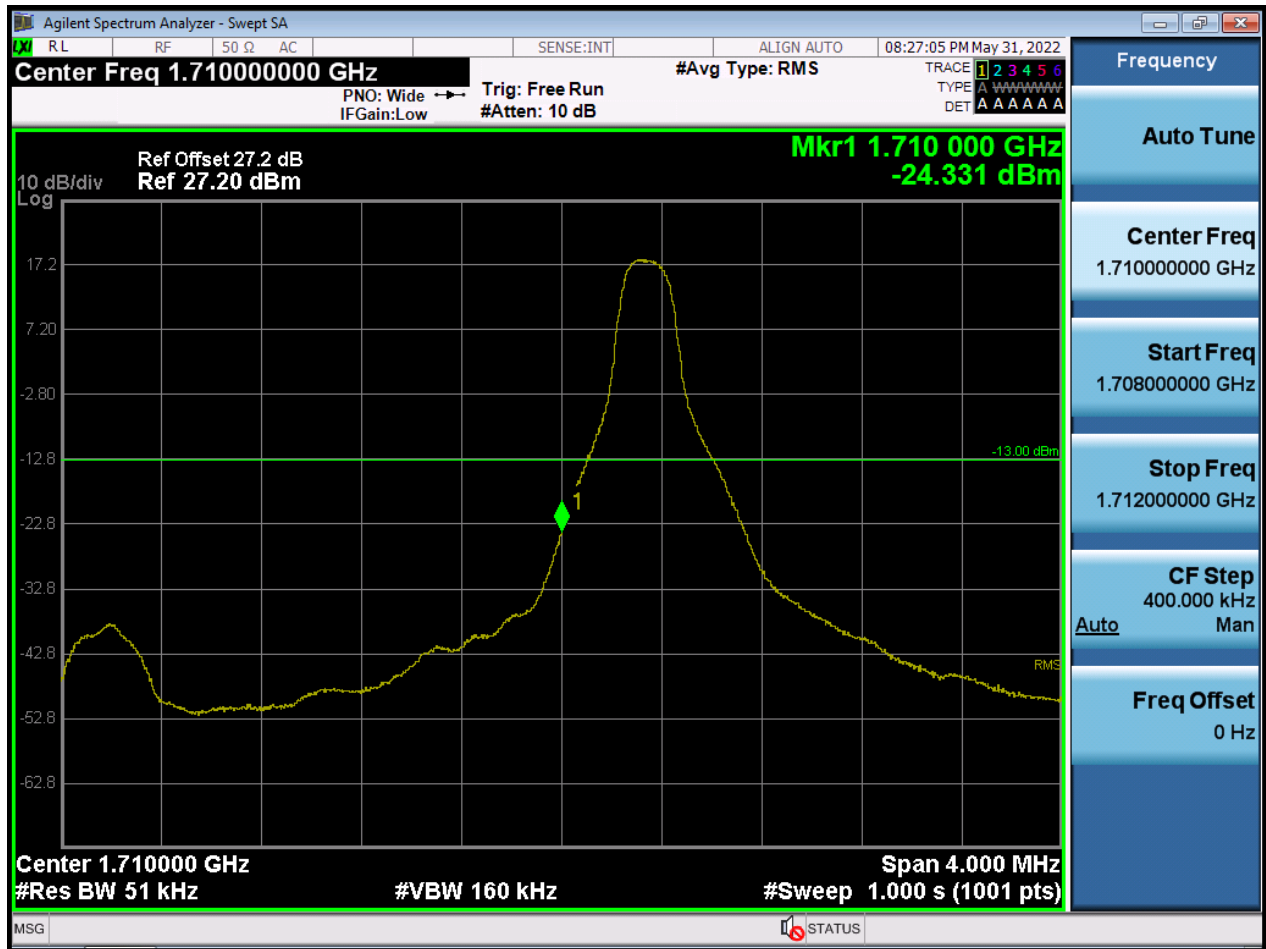


BW5 M_BandEdge_Highest Channel_QPSK_1RB

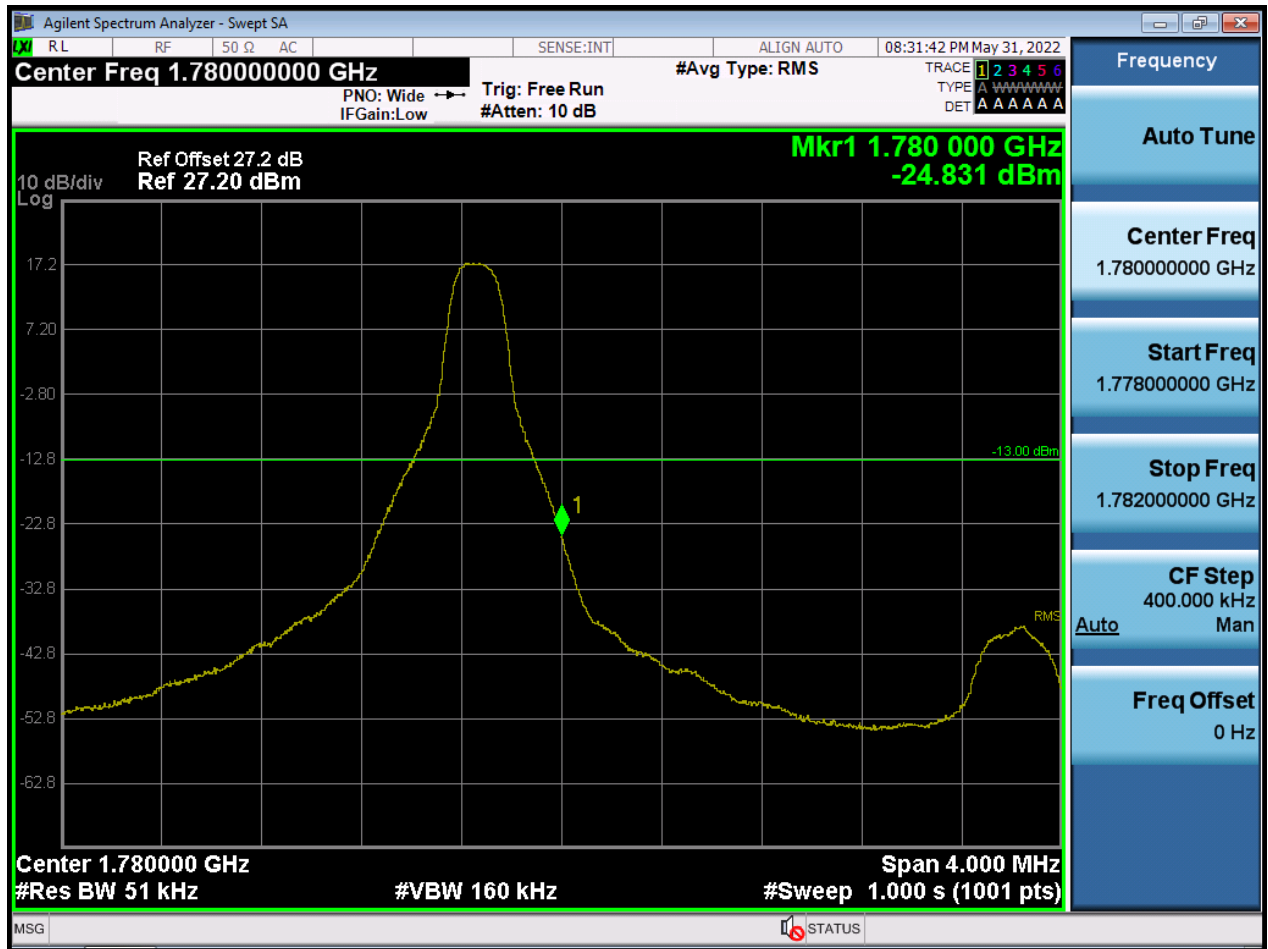

BW10 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW10 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

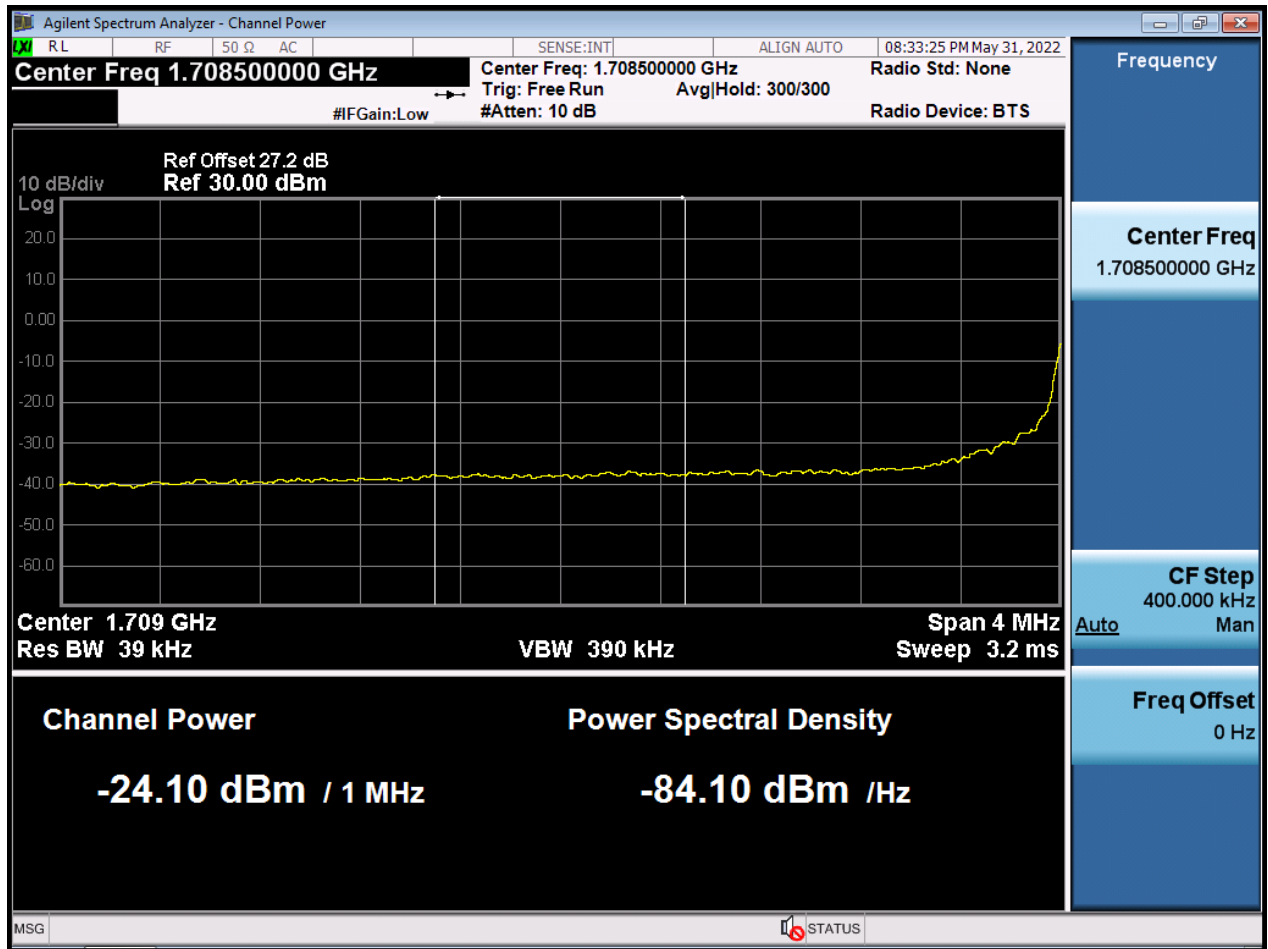

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

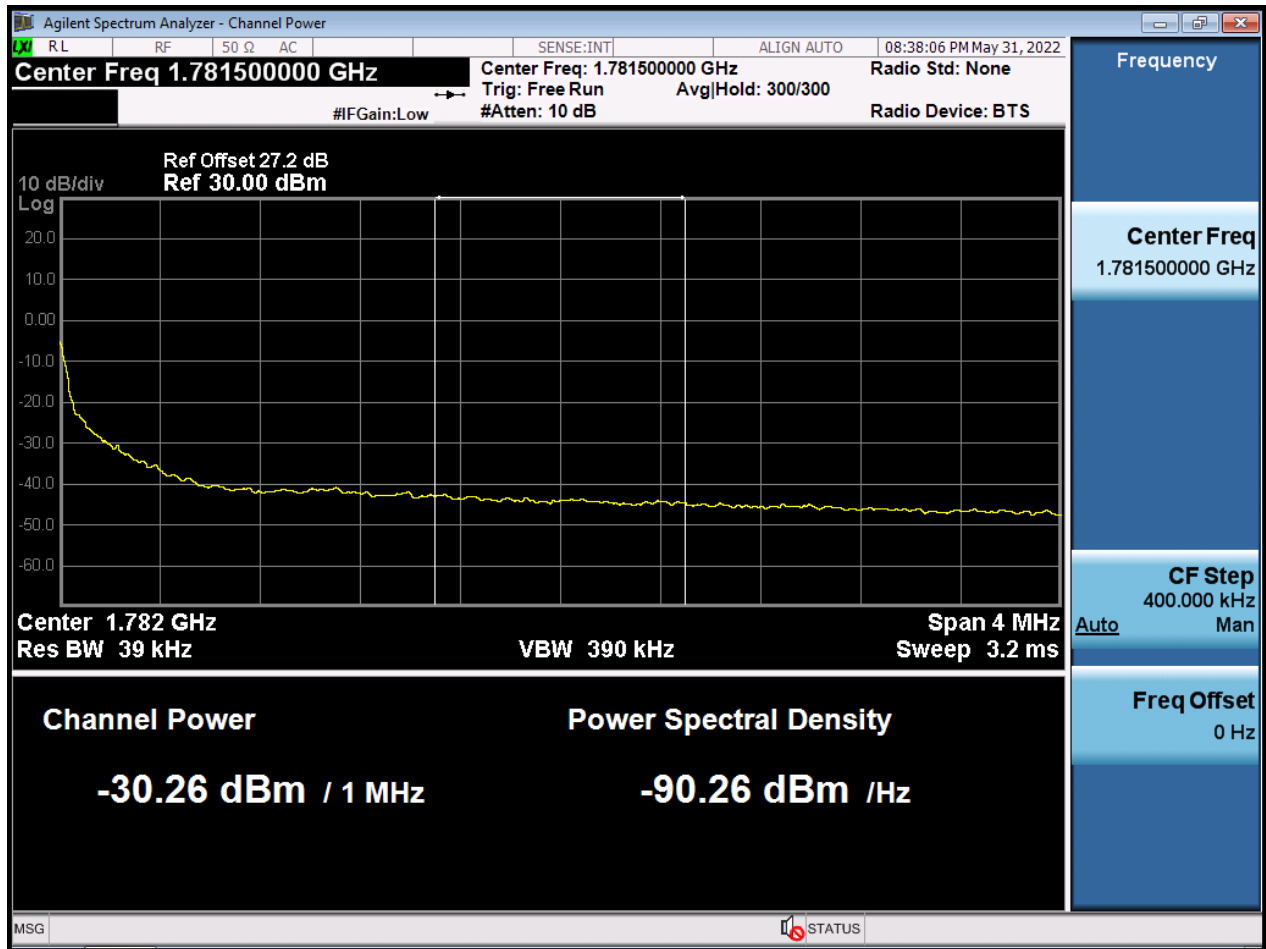

BW10 M_BandEdge_Lowest Channel_QPSK_1RB




BW10 M_BandEdge_Highest Channel_QPSK_1RB



BW15 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

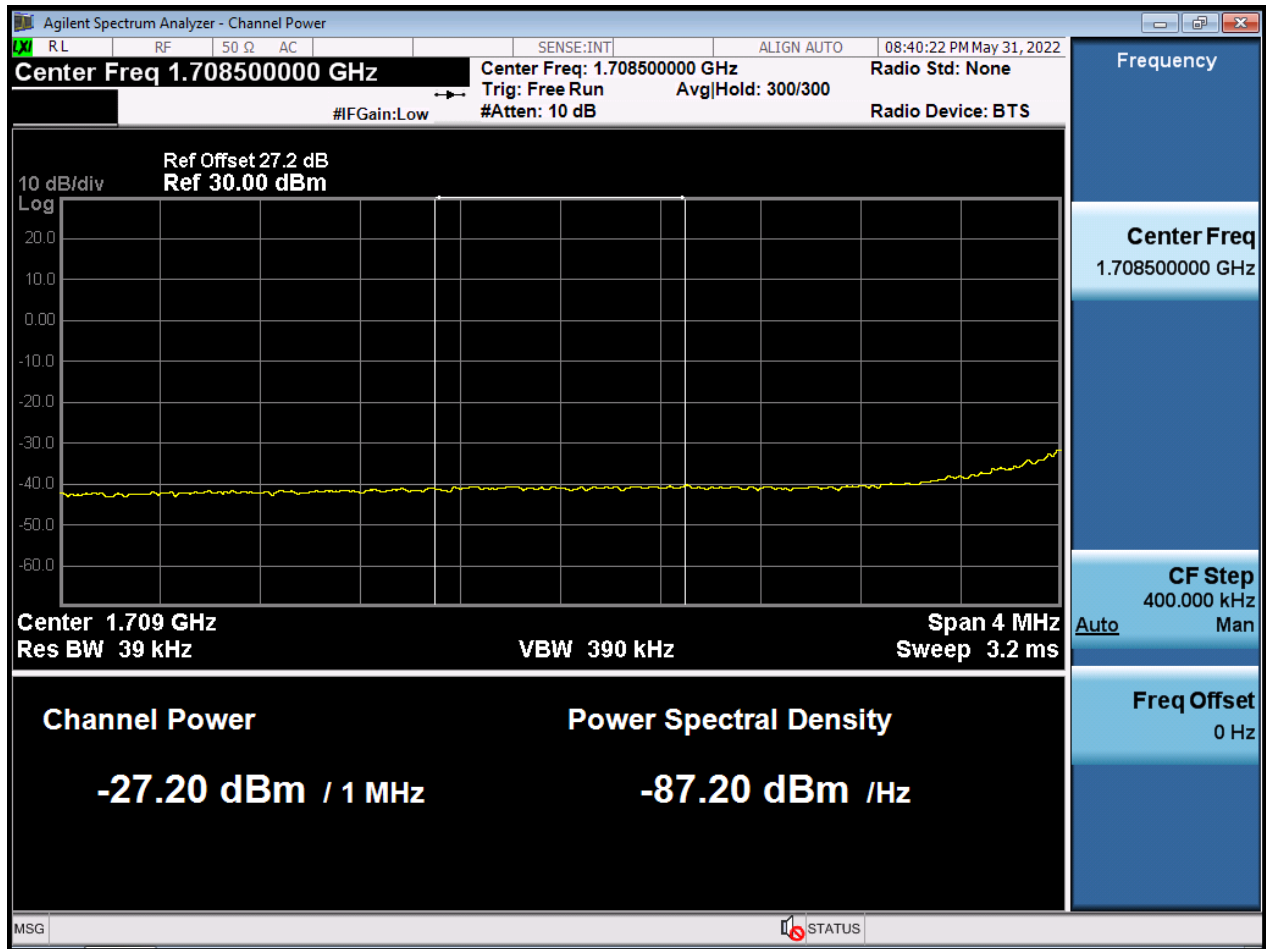


BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

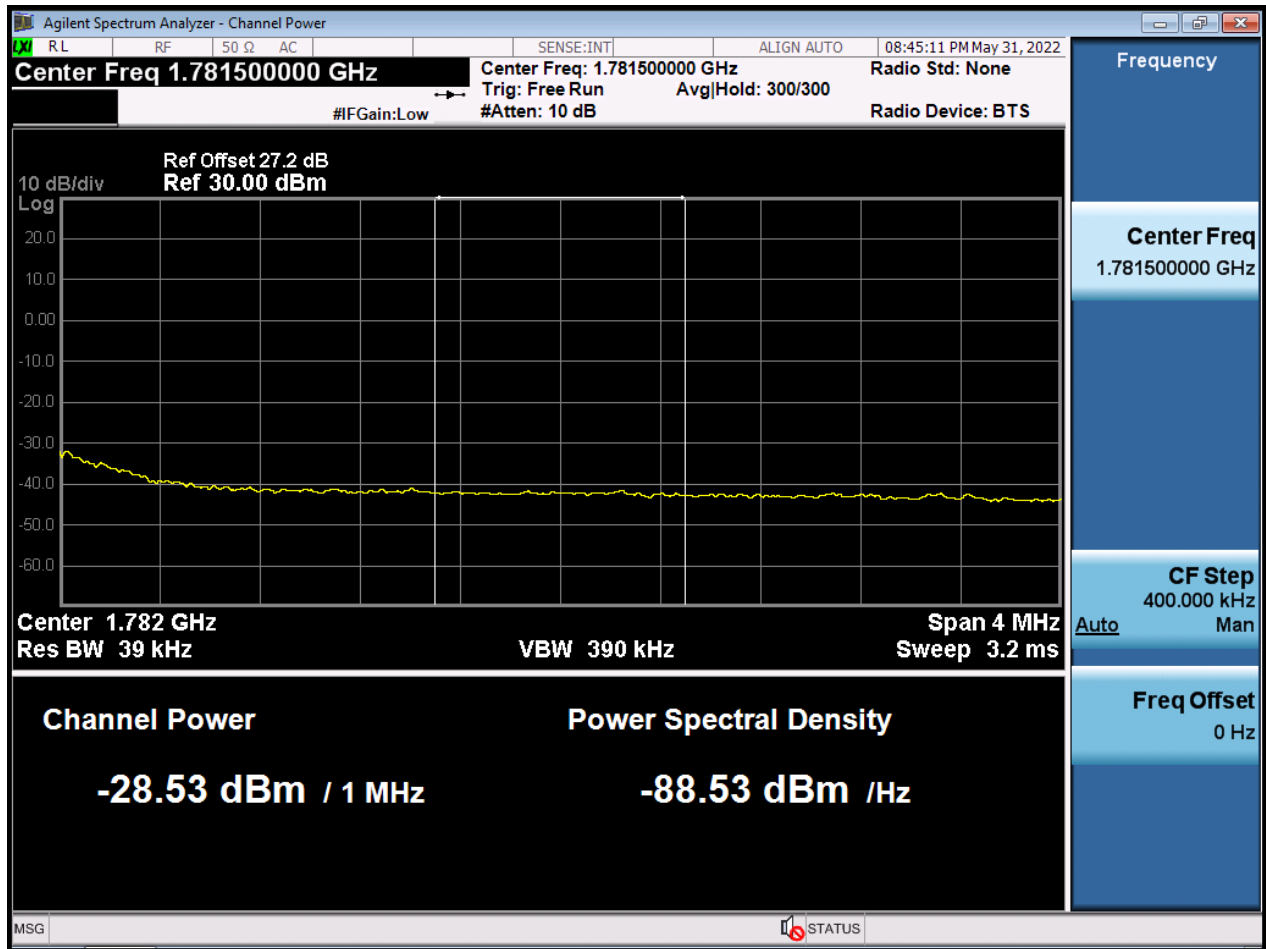

BW15 M_BandEdge_Lowest Channel_QPSK_1RB

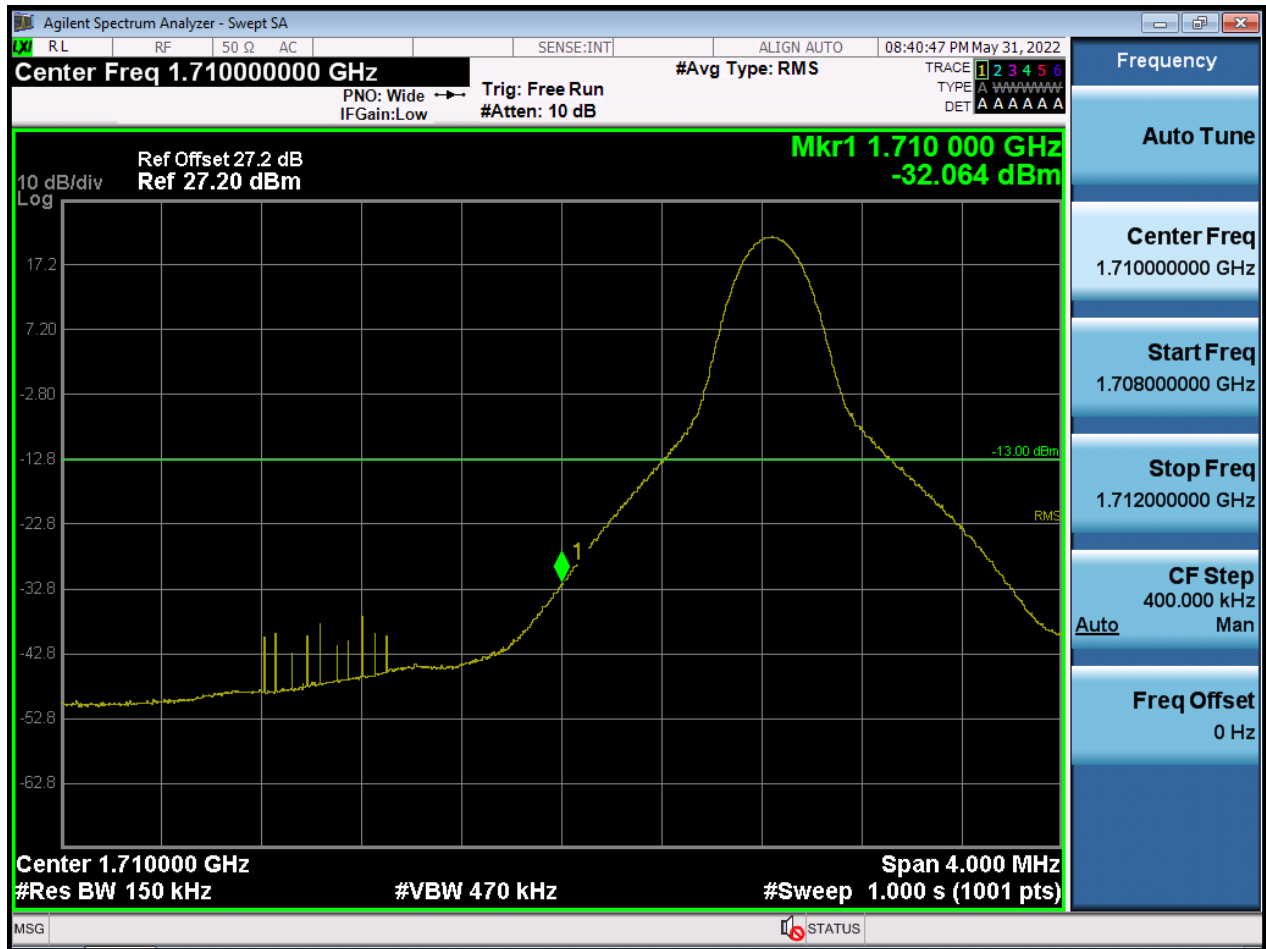


BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW20 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

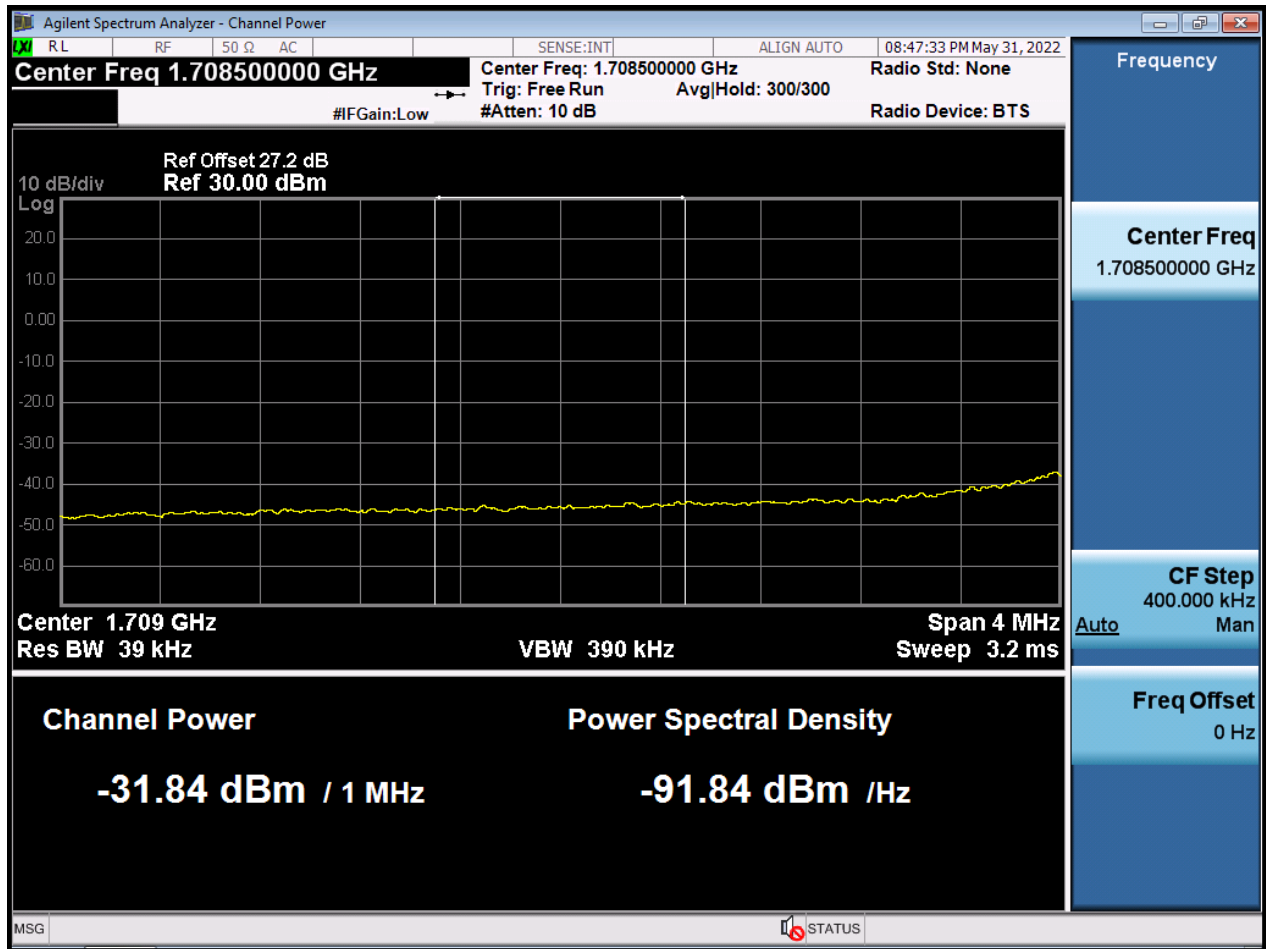

BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

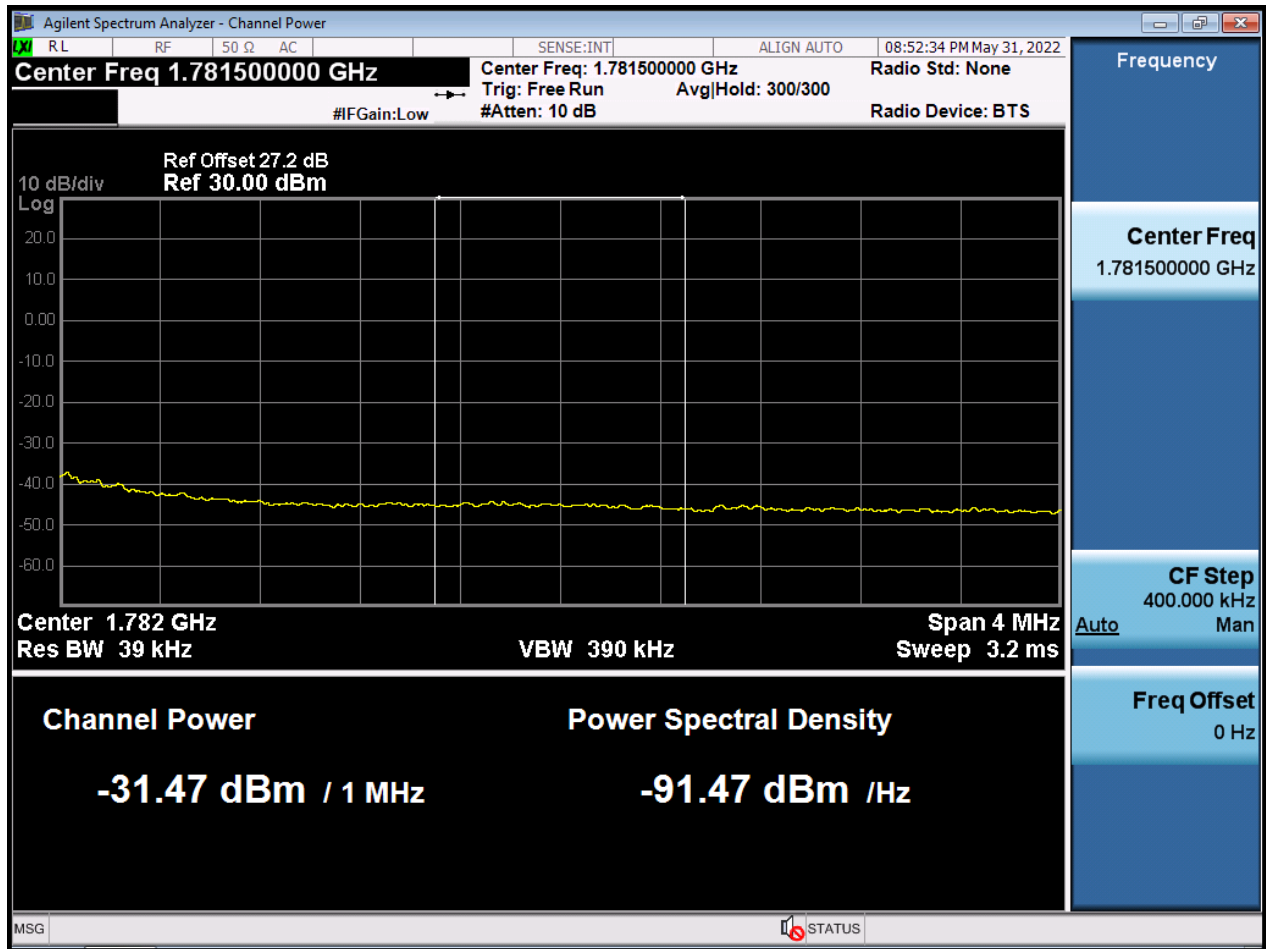


BW20 M_BandEdge_Lowest Channel_QPSK_1RB




BW20 M_BandEdge_Highest Channel_QPSK_1RB




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

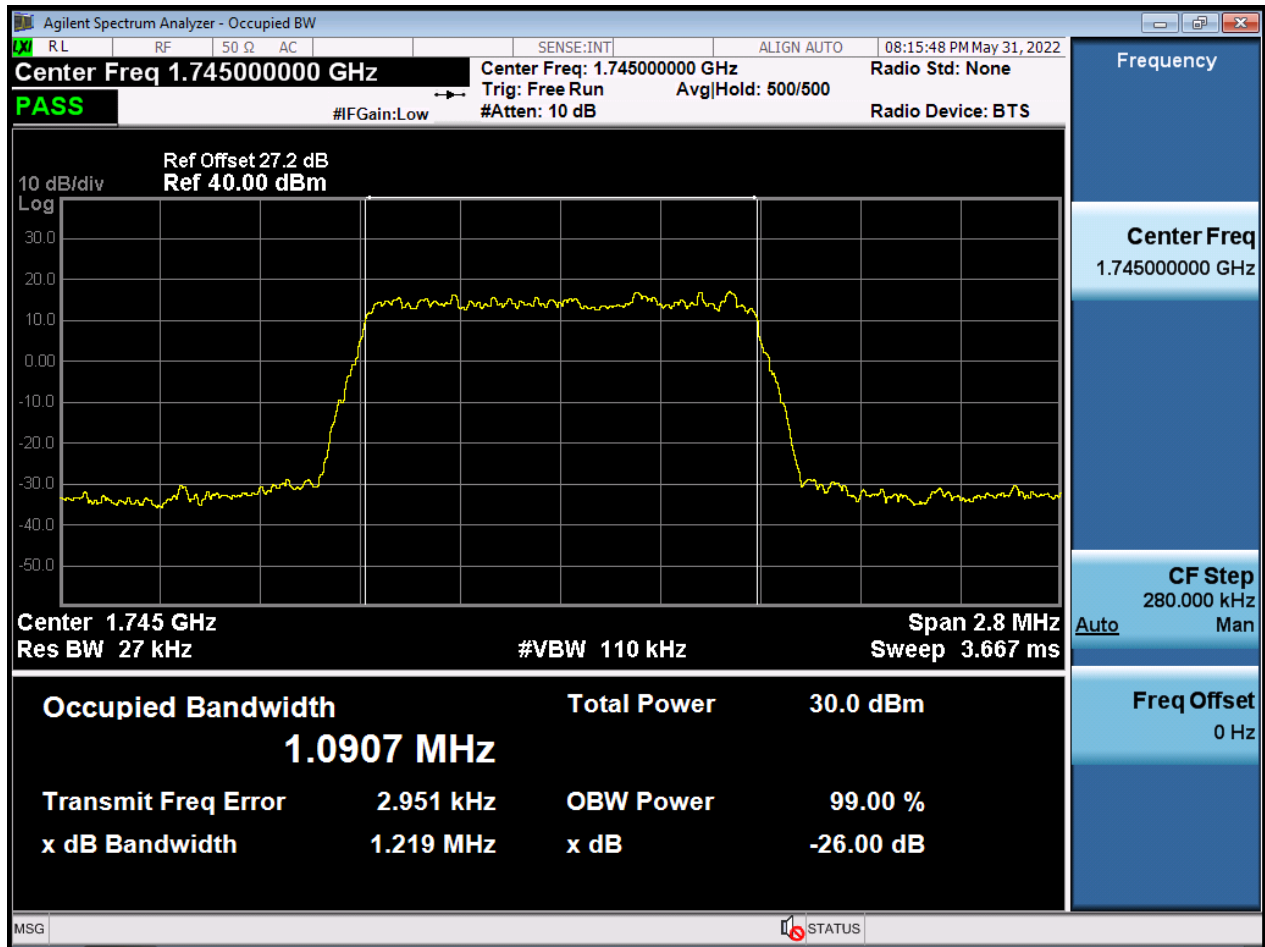


BW1.4 M_OBW_Middle Channel_16QAM_FullRB

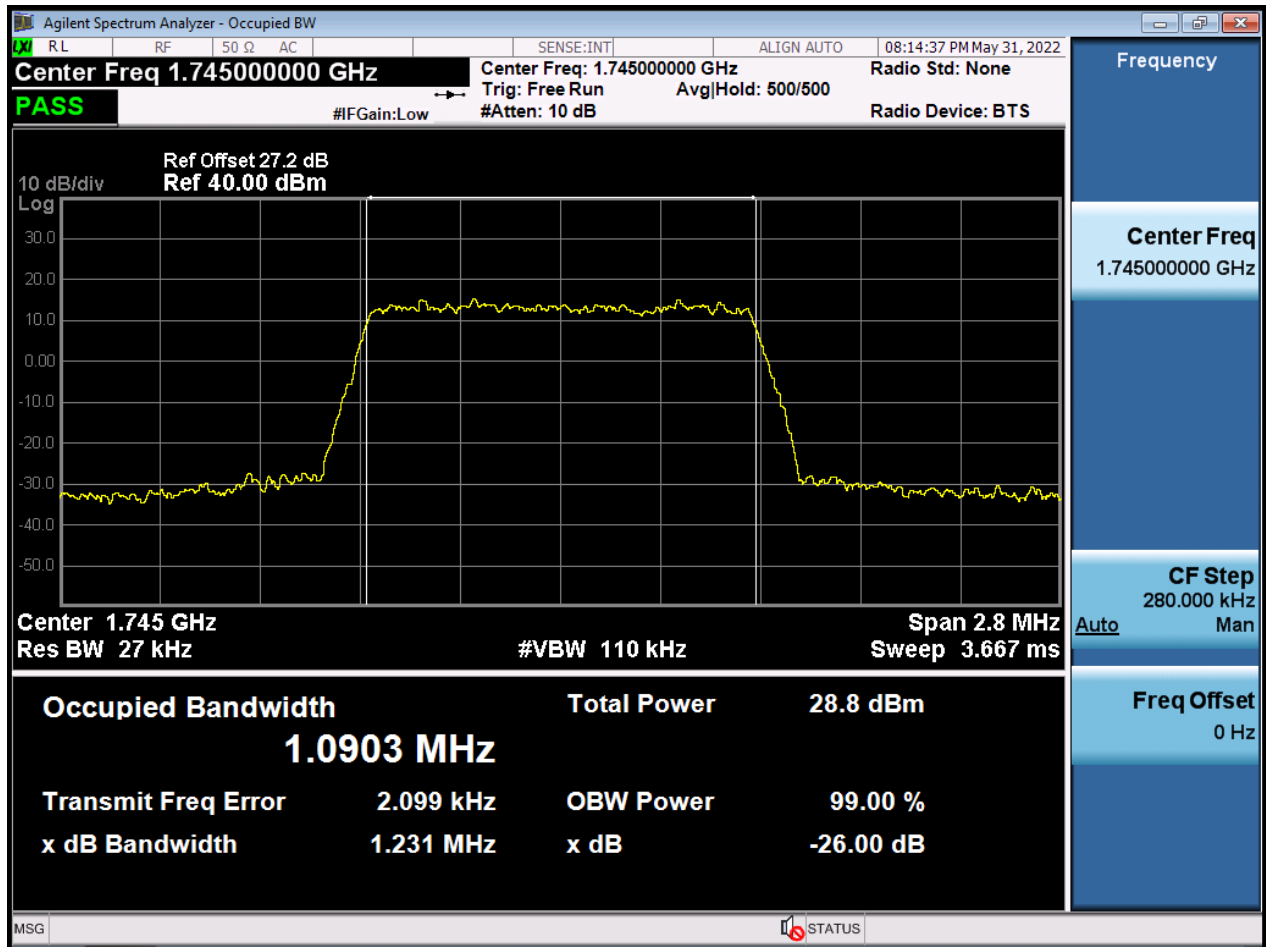


BW1.4 M_OBW_Middle Channel_64QAM_FullRB

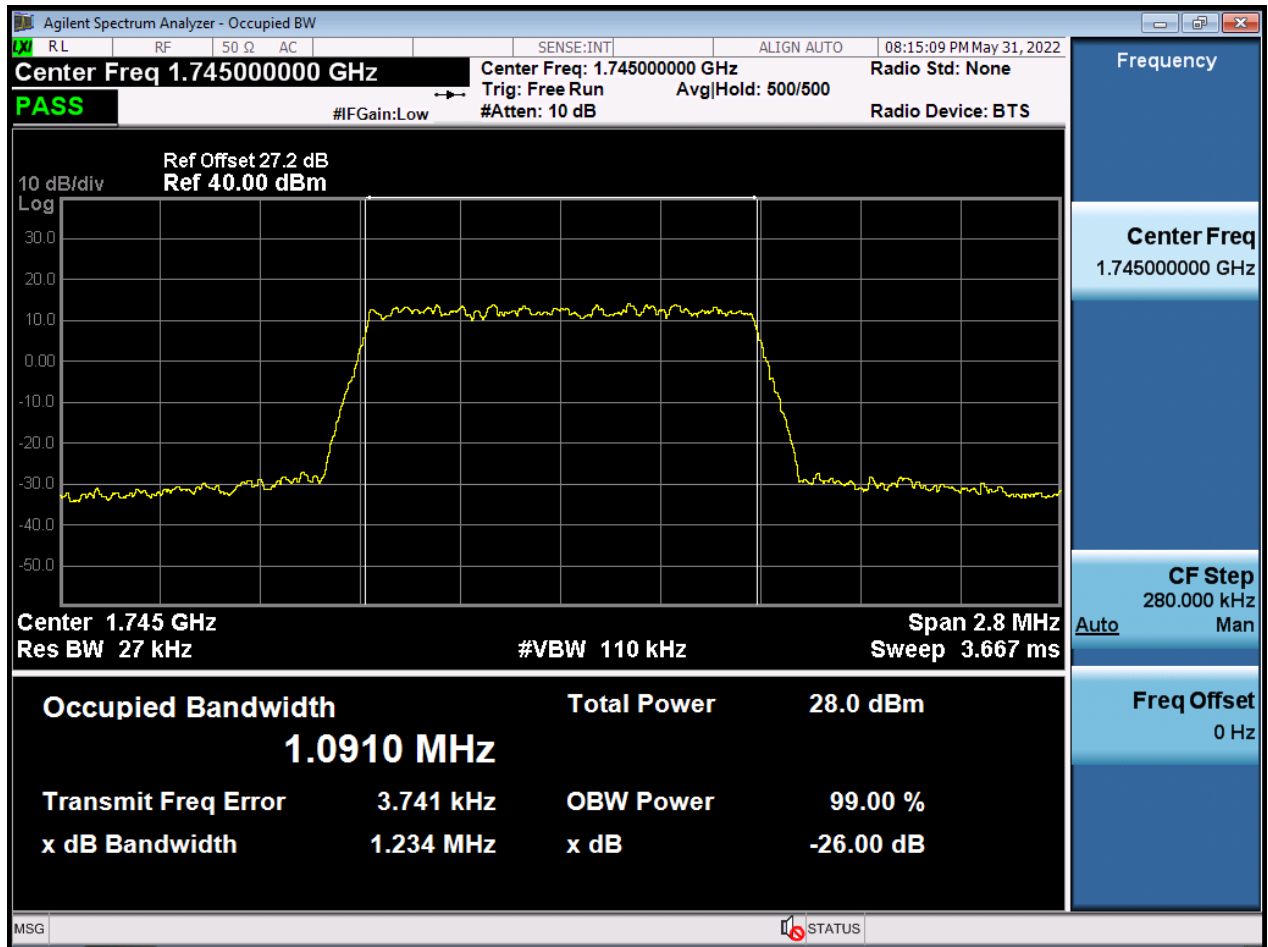


BW1.4 M_OBW_Middle Channel_256QAM_FullRB

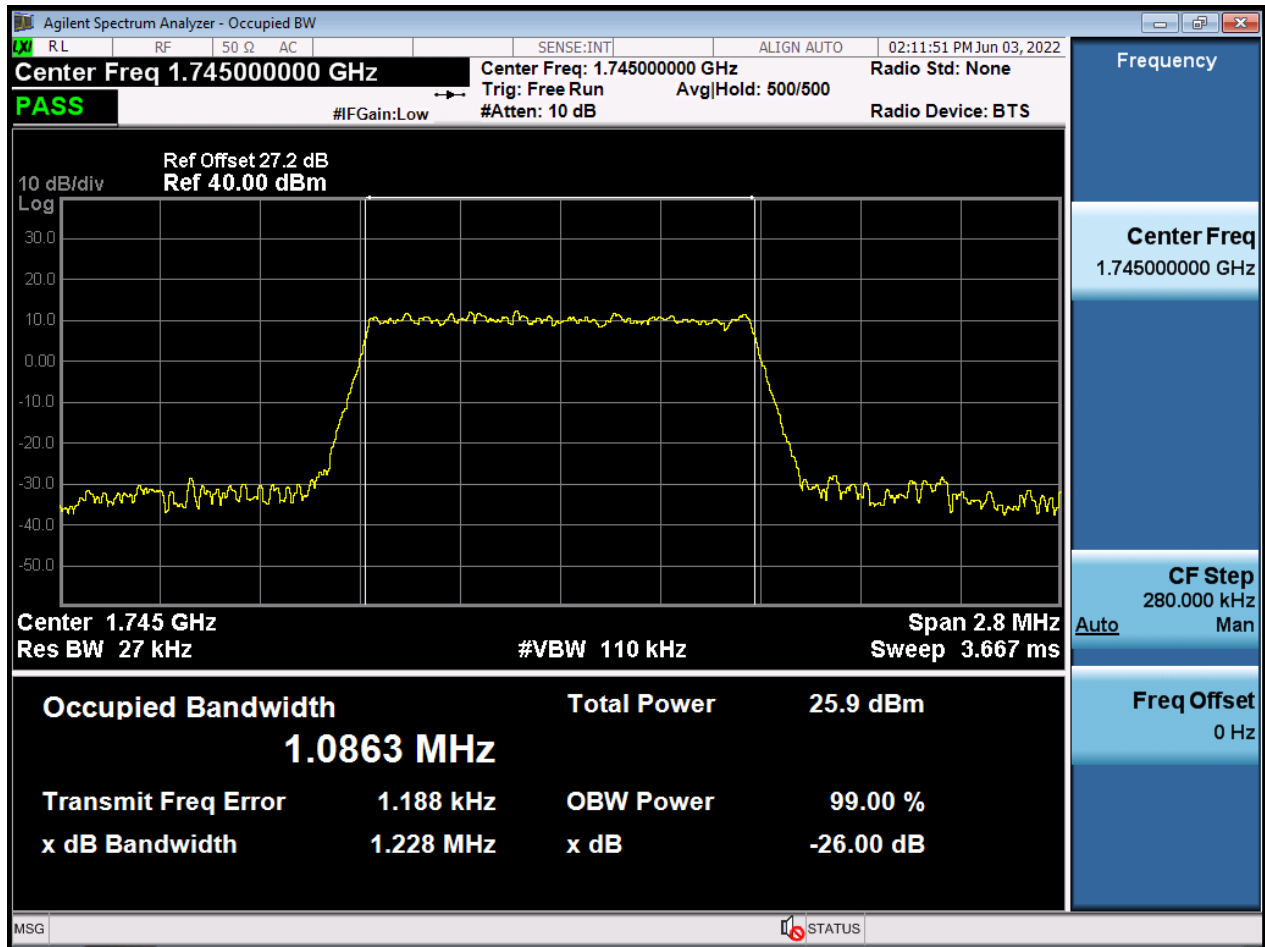


BW3 M_OBW_Middle Channel_QPSK_FullRB

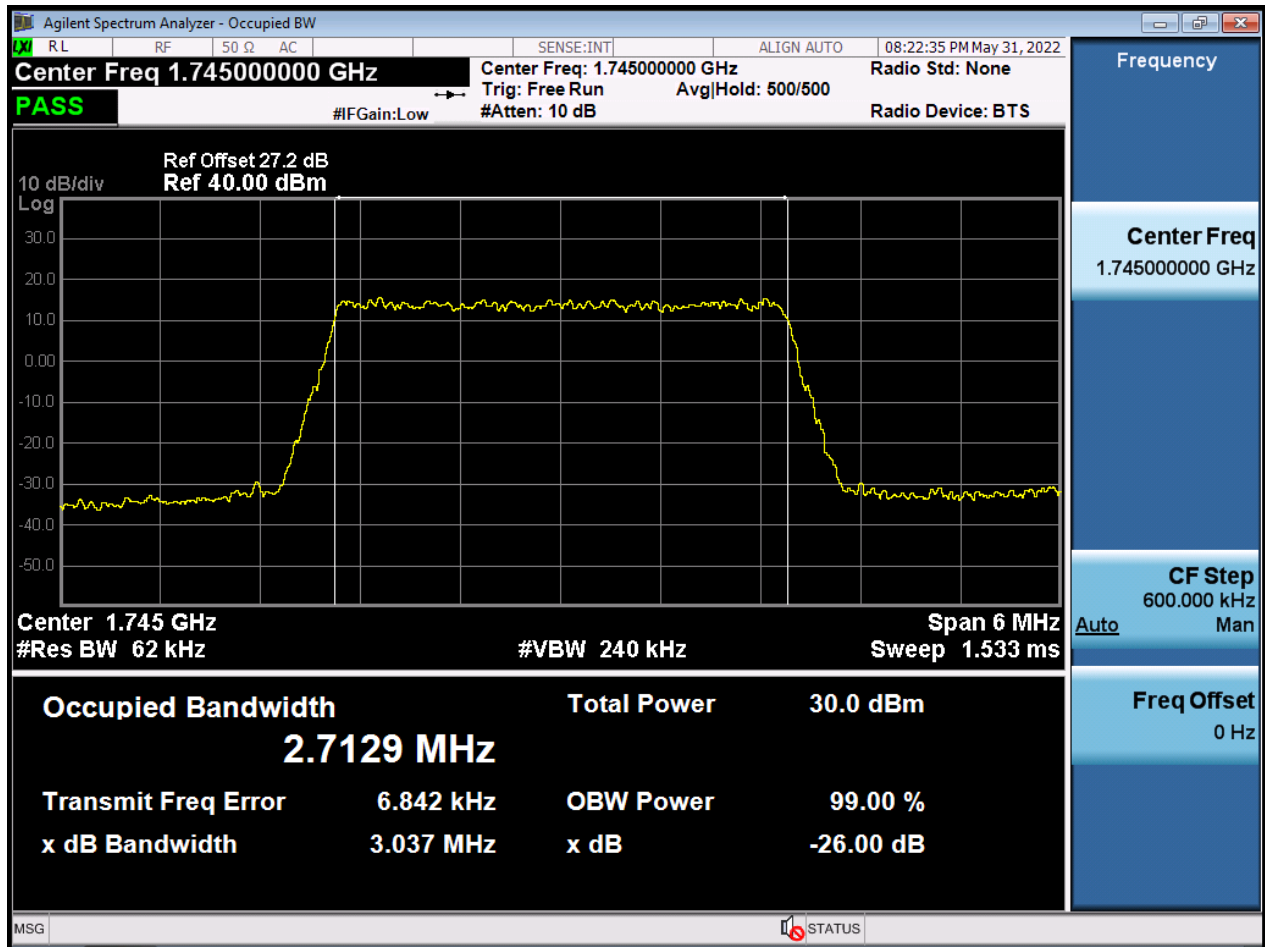


BW3 M_OBW_Middle Channel_16QAM_FullRB

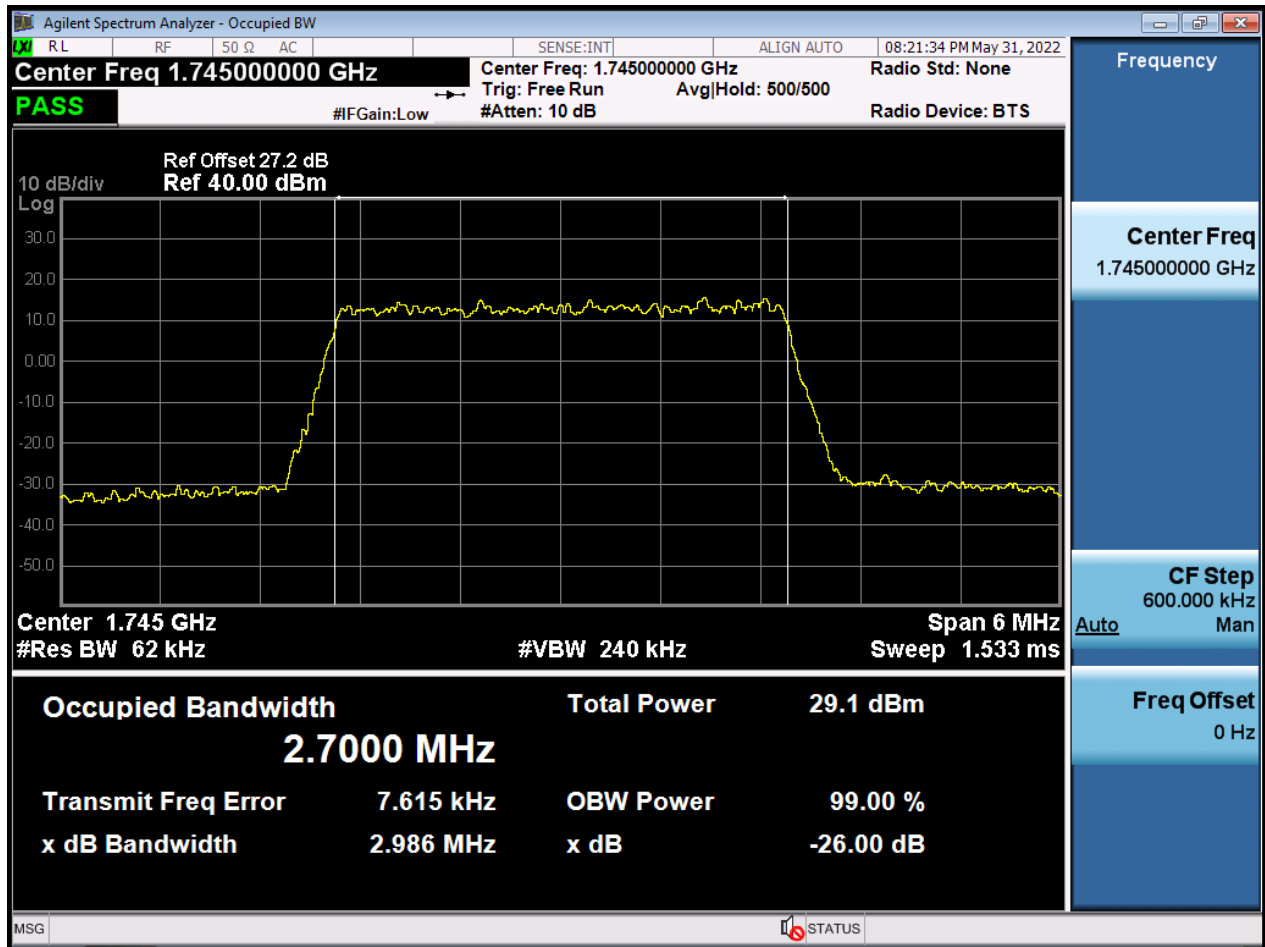


BW3 M_OBW_Middle Channel_64QAM_FullIRB

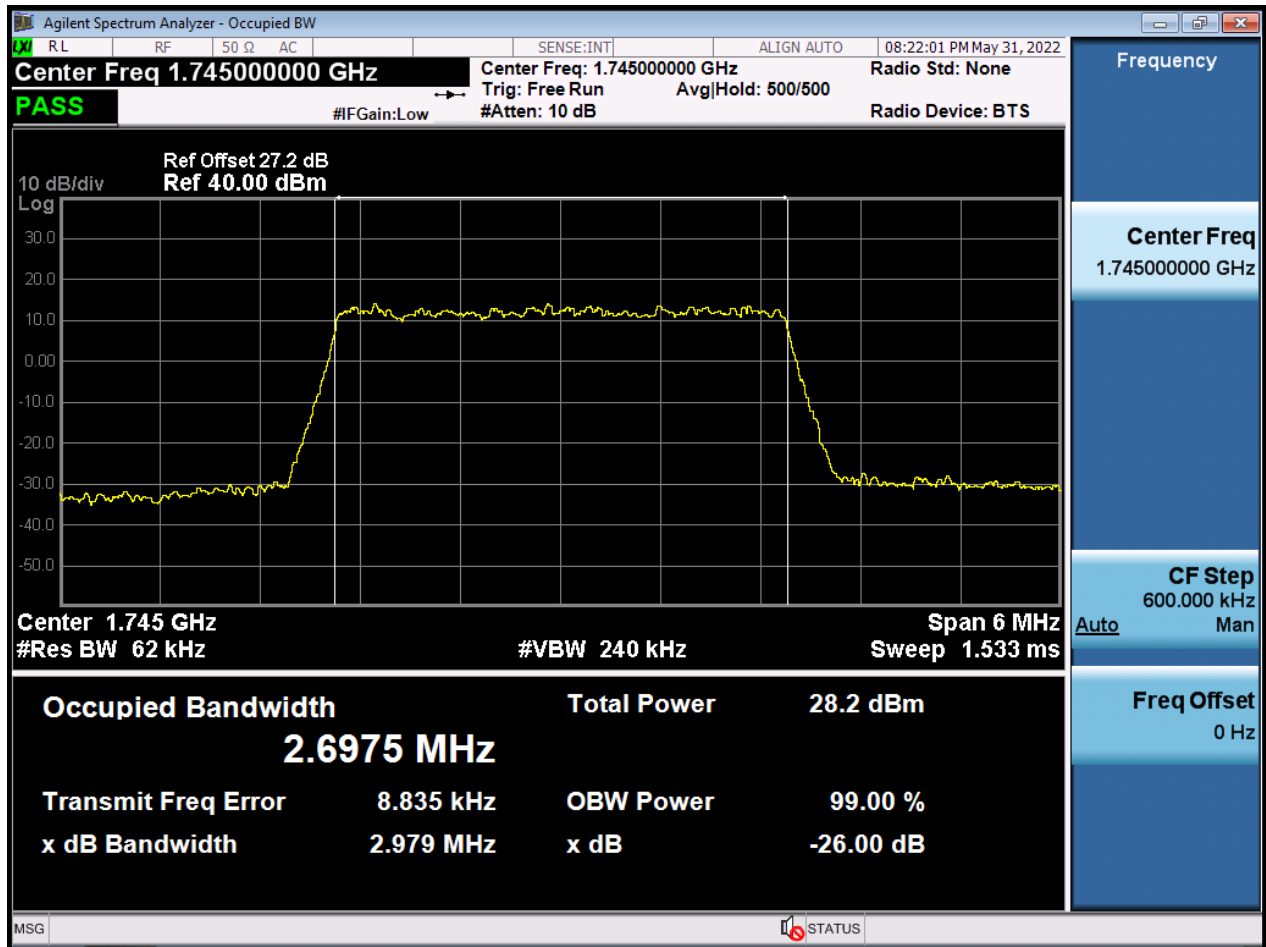


BW3 M_OBW_Middle Channel_256QAM_FullIRB

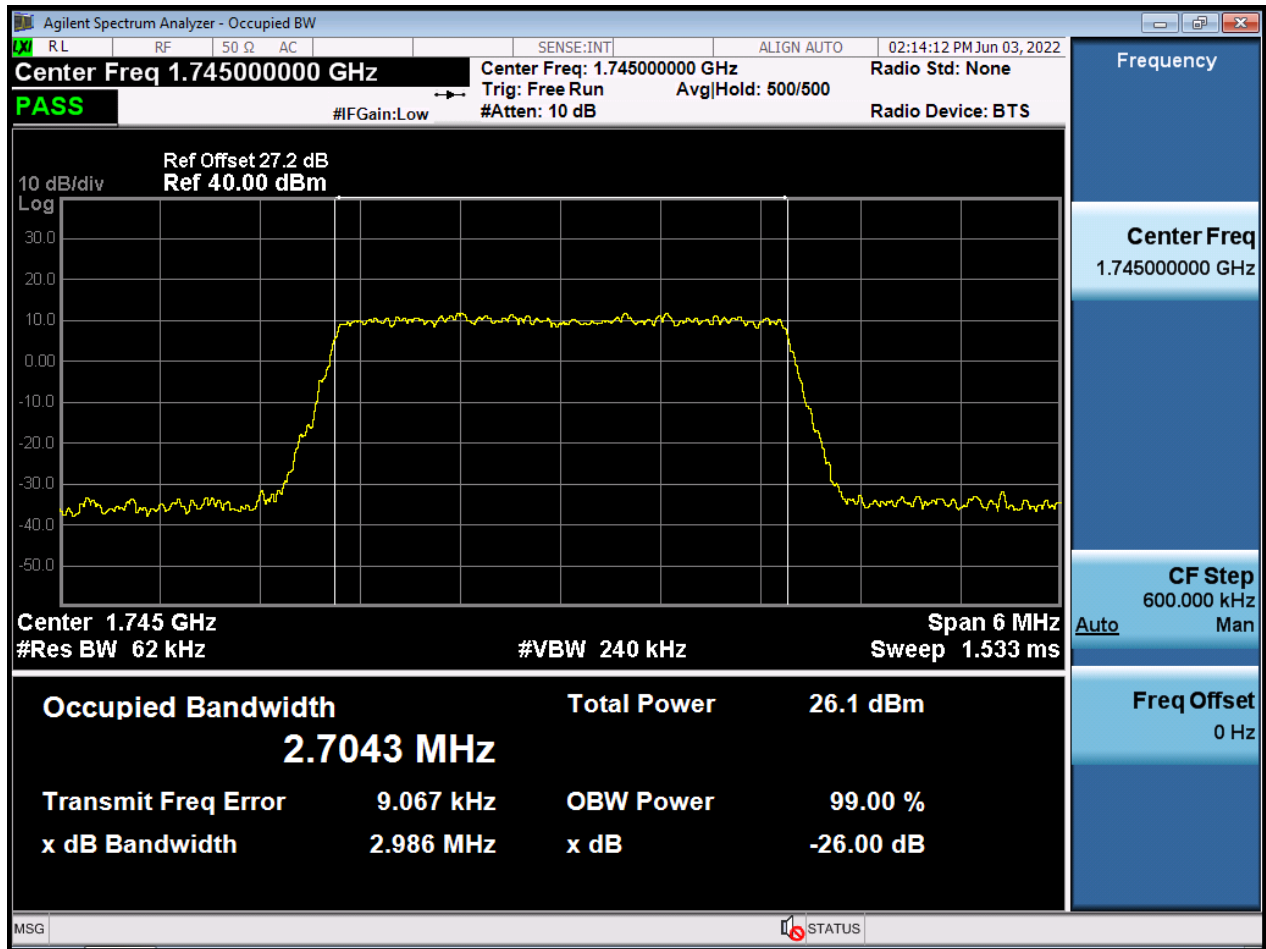


BW5 M_OBW_Middle Channel_QPSK_FullRB

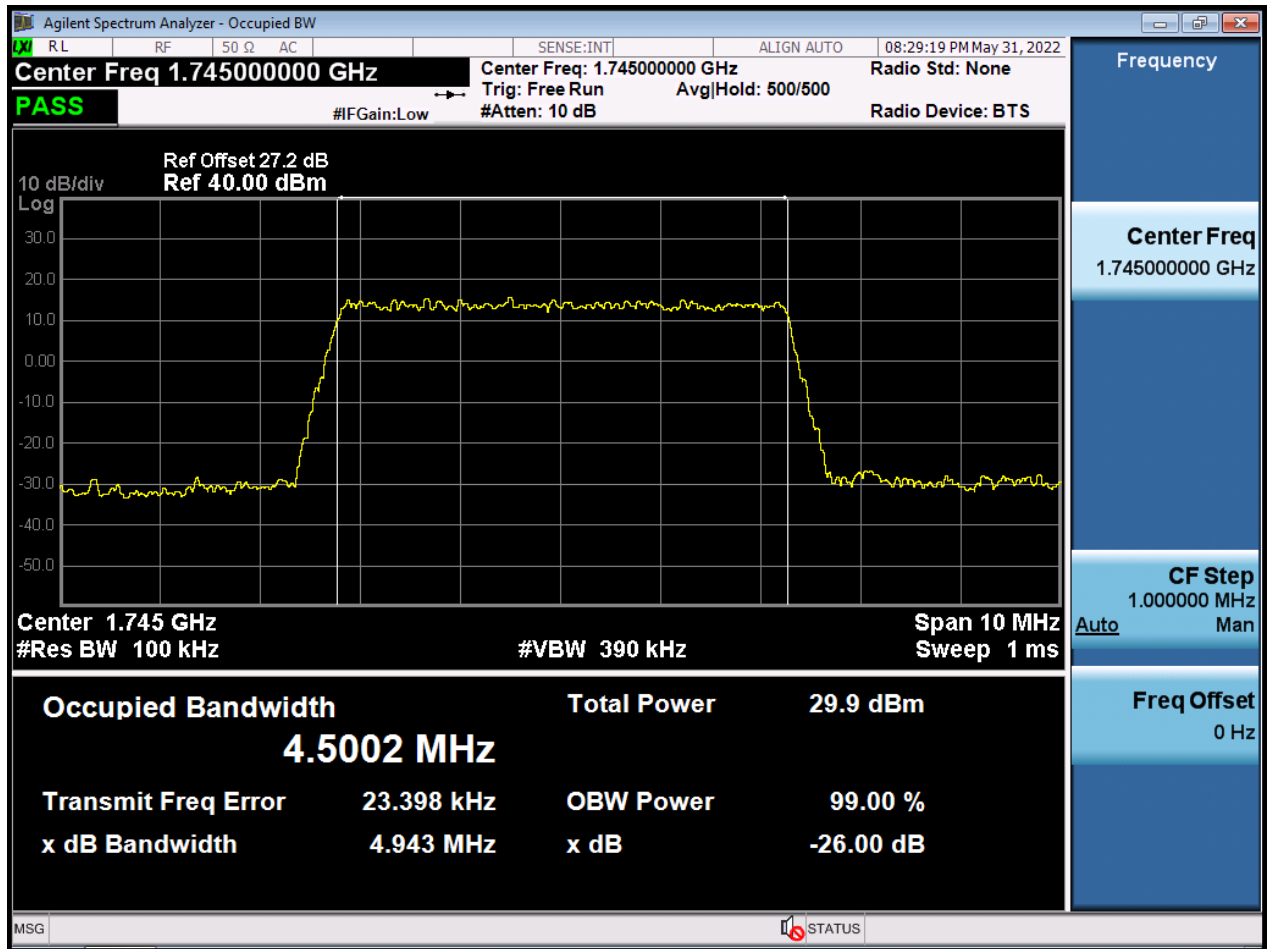


BW5 M_OBW_Middle Channel_16QAM_FullIRB

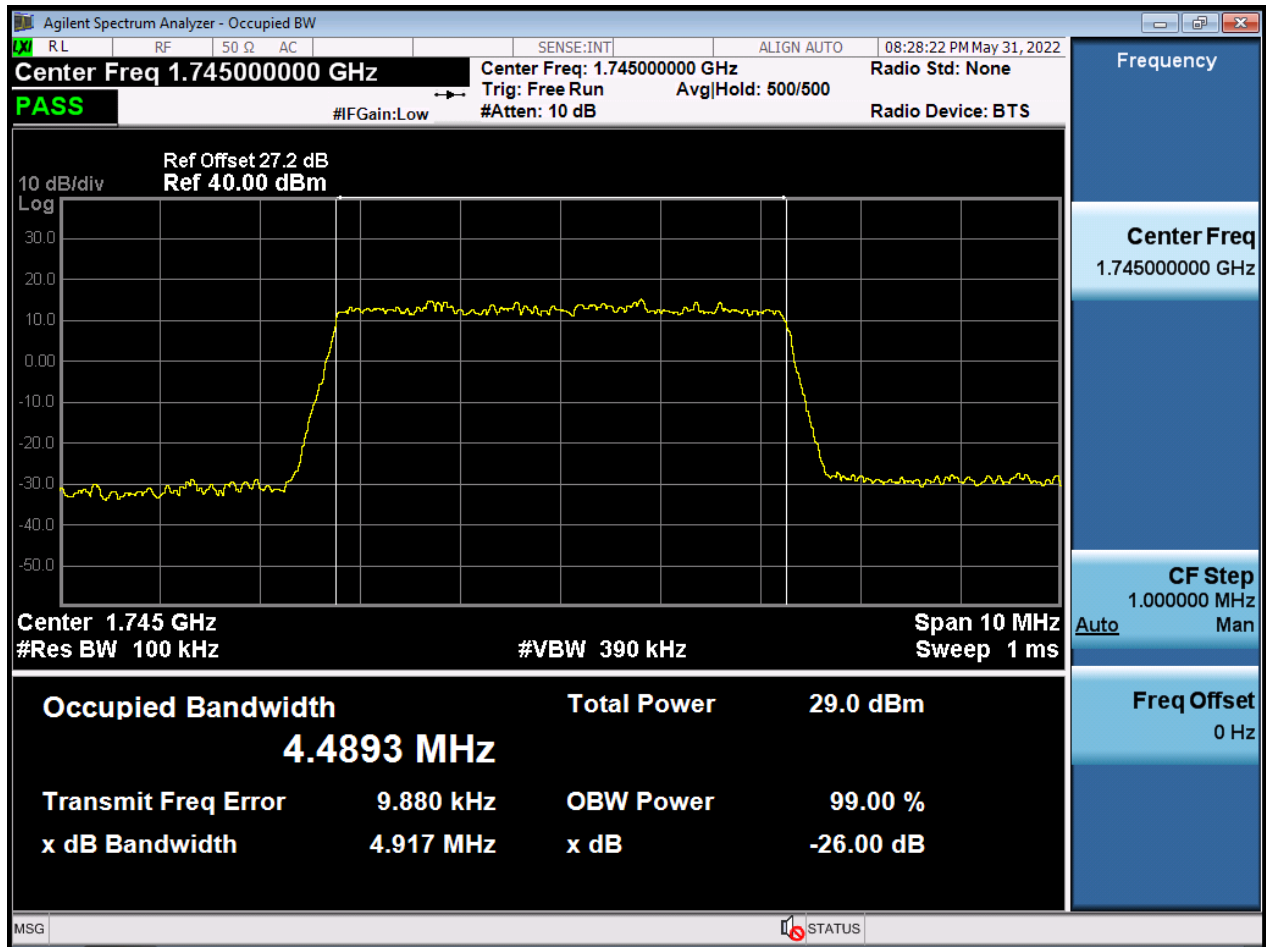


BW5 M_OBW_Middle Channel_64QAM_FullIRB

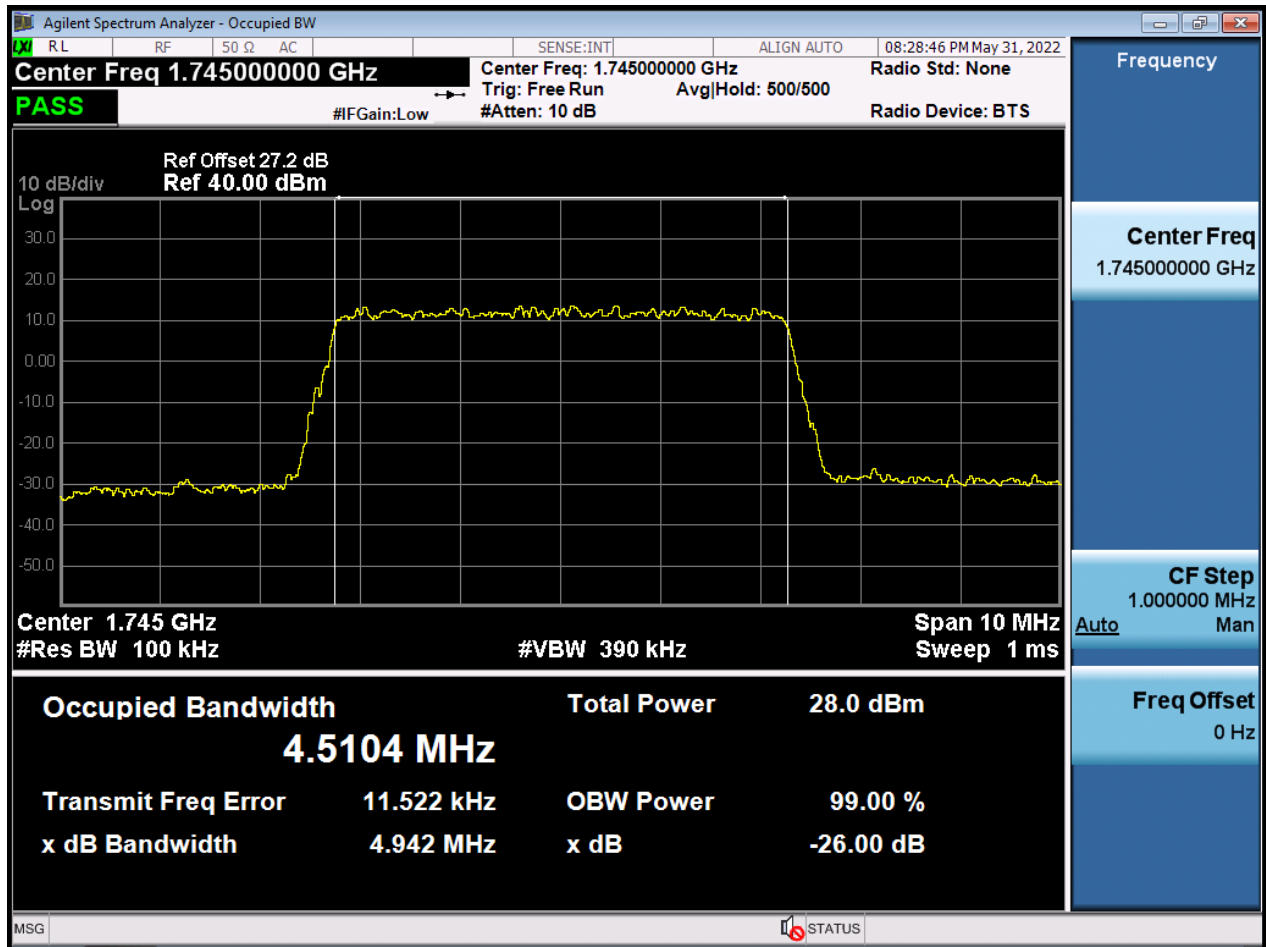


BW5 M_OBW_Middle Channel_256QAM_FullIRB

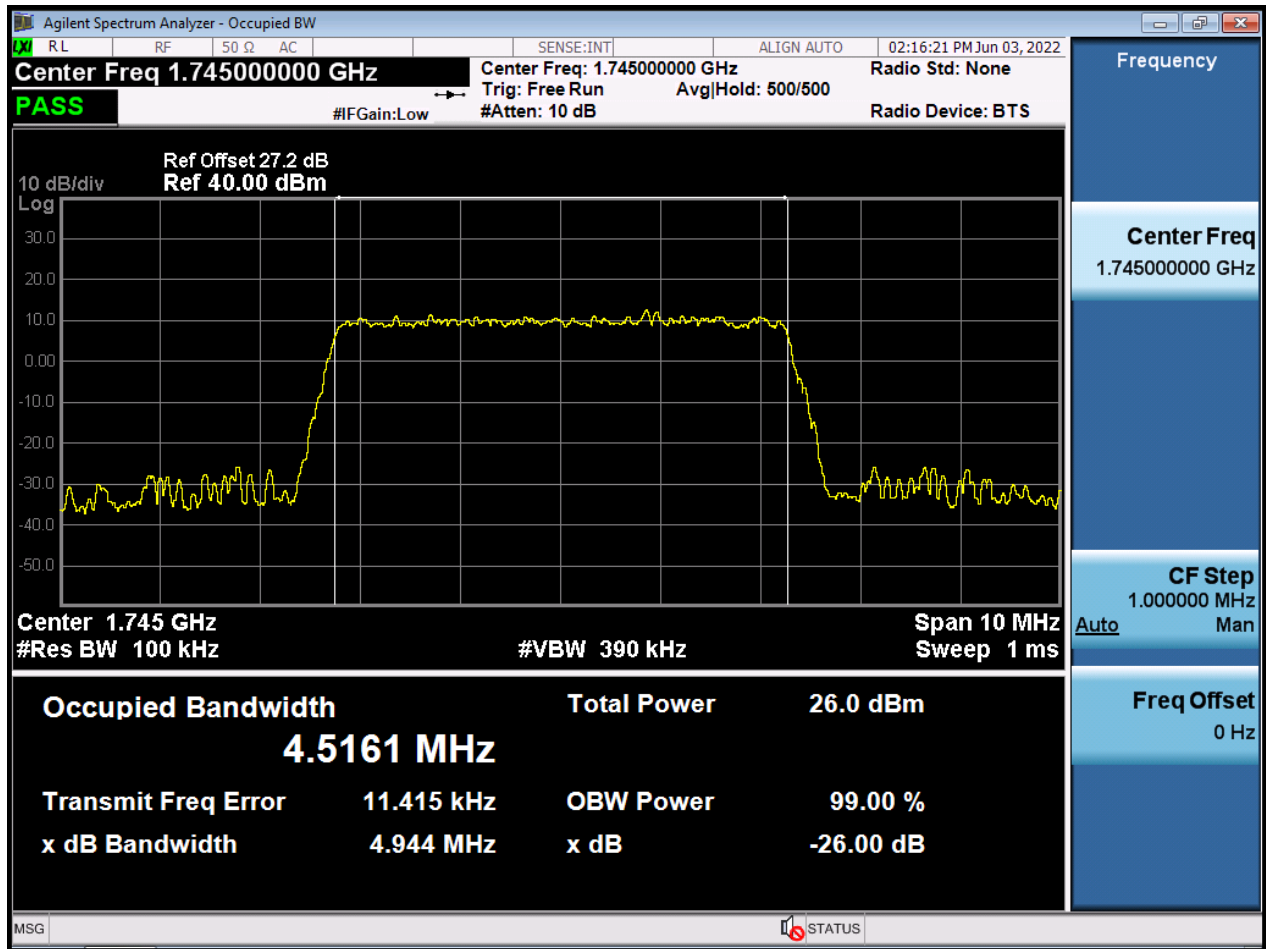


BW10 M_OBW_Middle Channel_QPSK_FullIRB

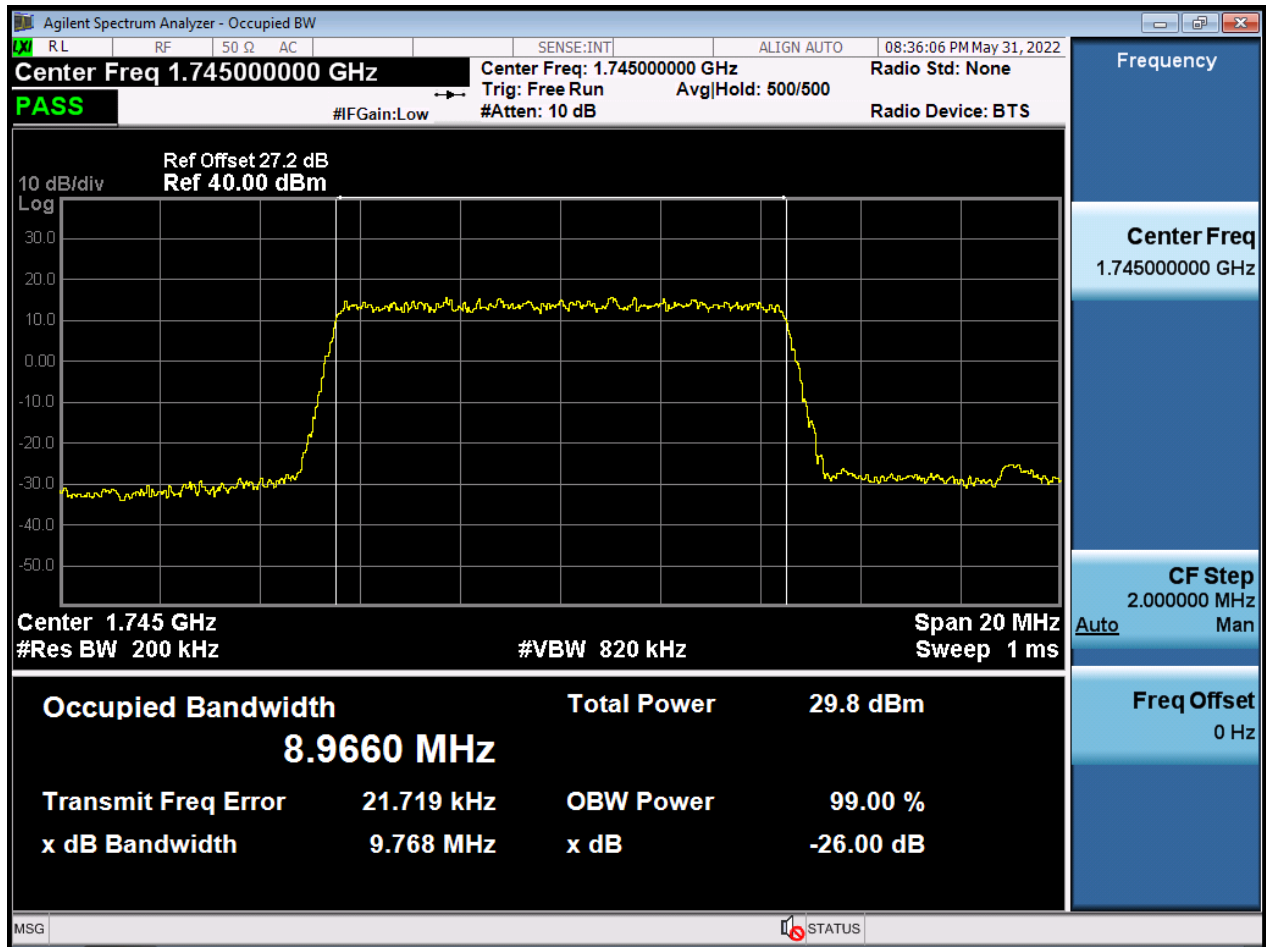


BW10 M_OBW_Middle Channel_16QAM_FullIRB

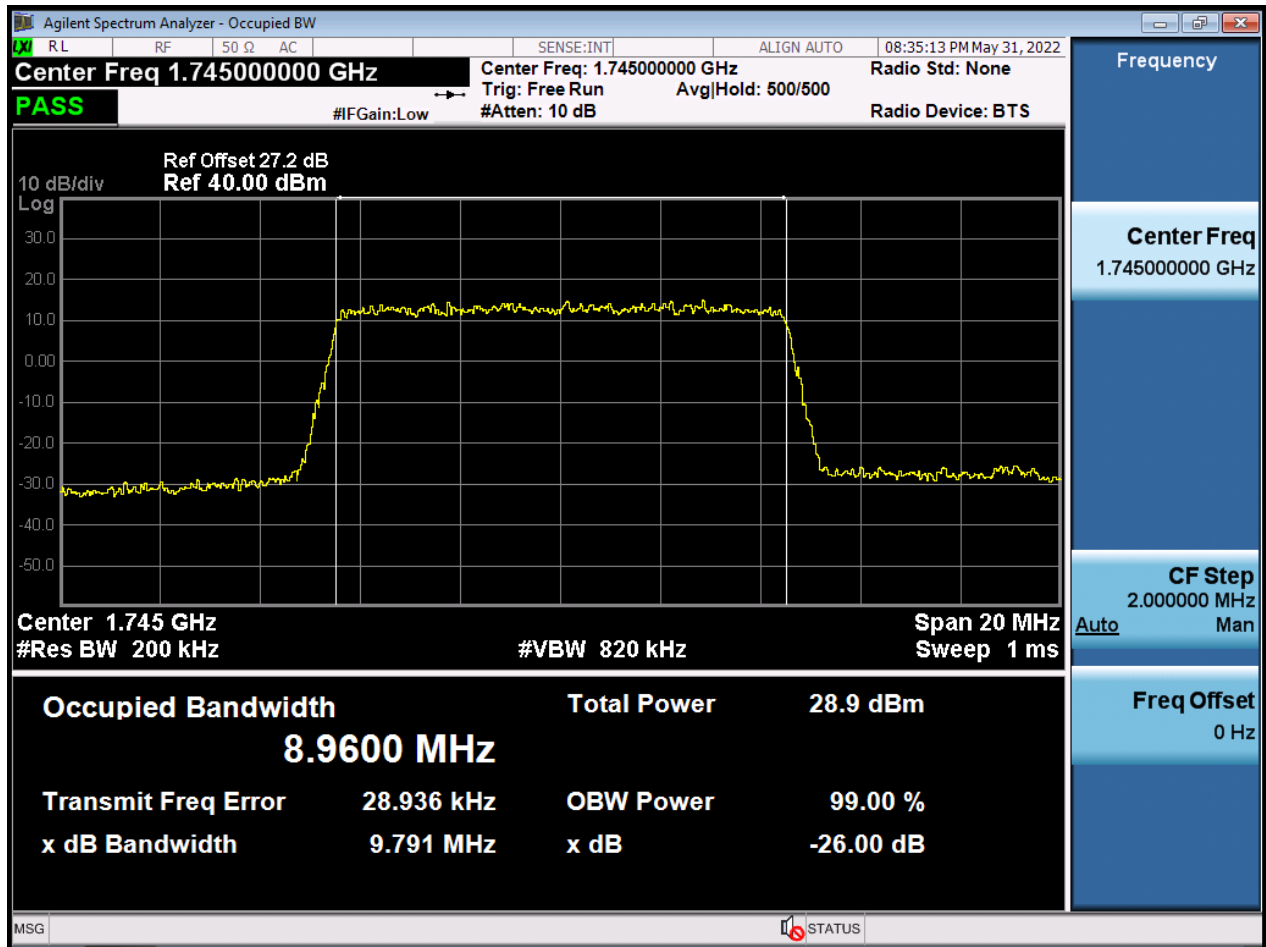


BW10 M_OBW_Middle Channel_64QAM_FullIRB

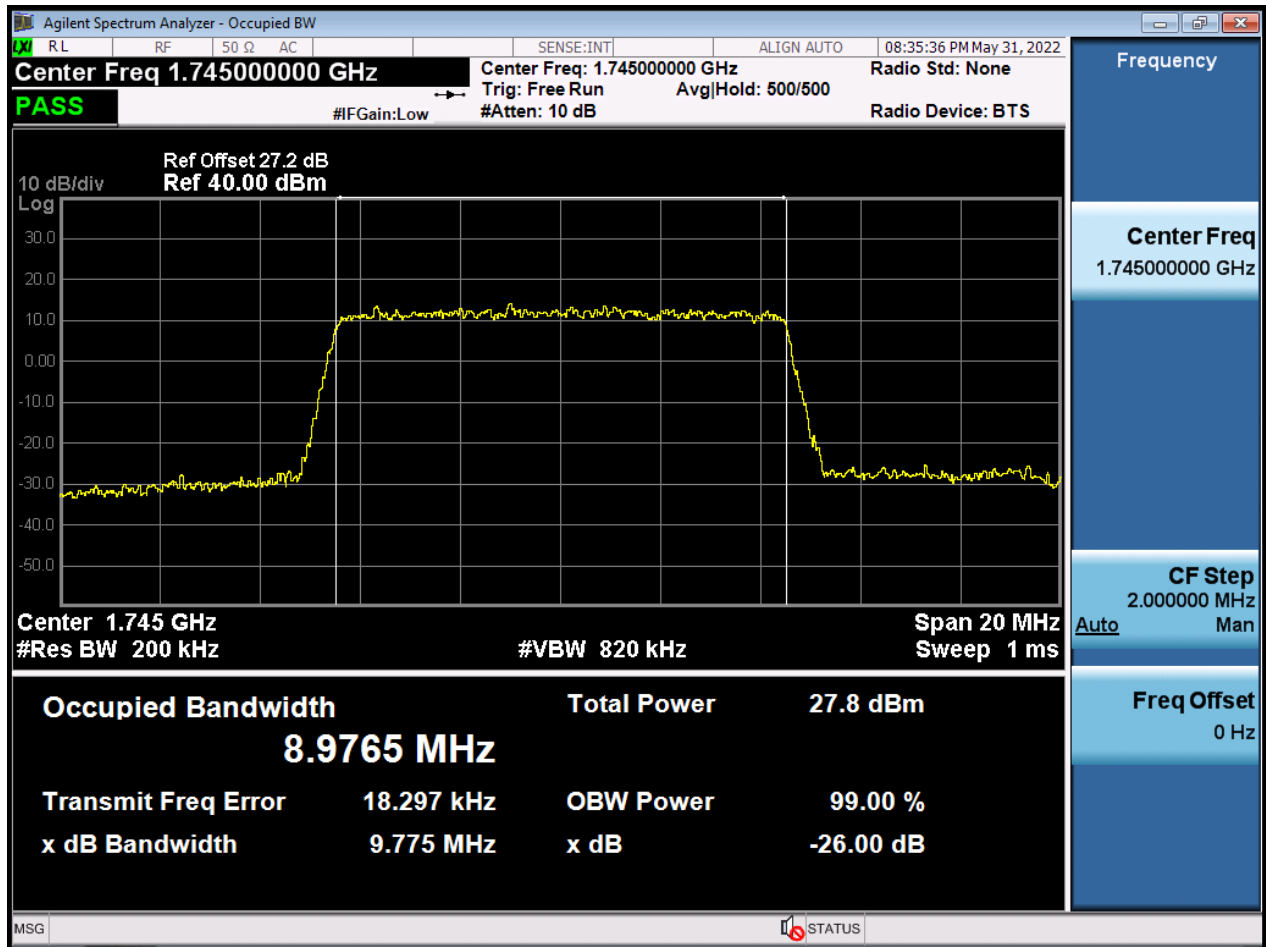


BW10 M_OBW_Middle Channel_256QAM_FullRB

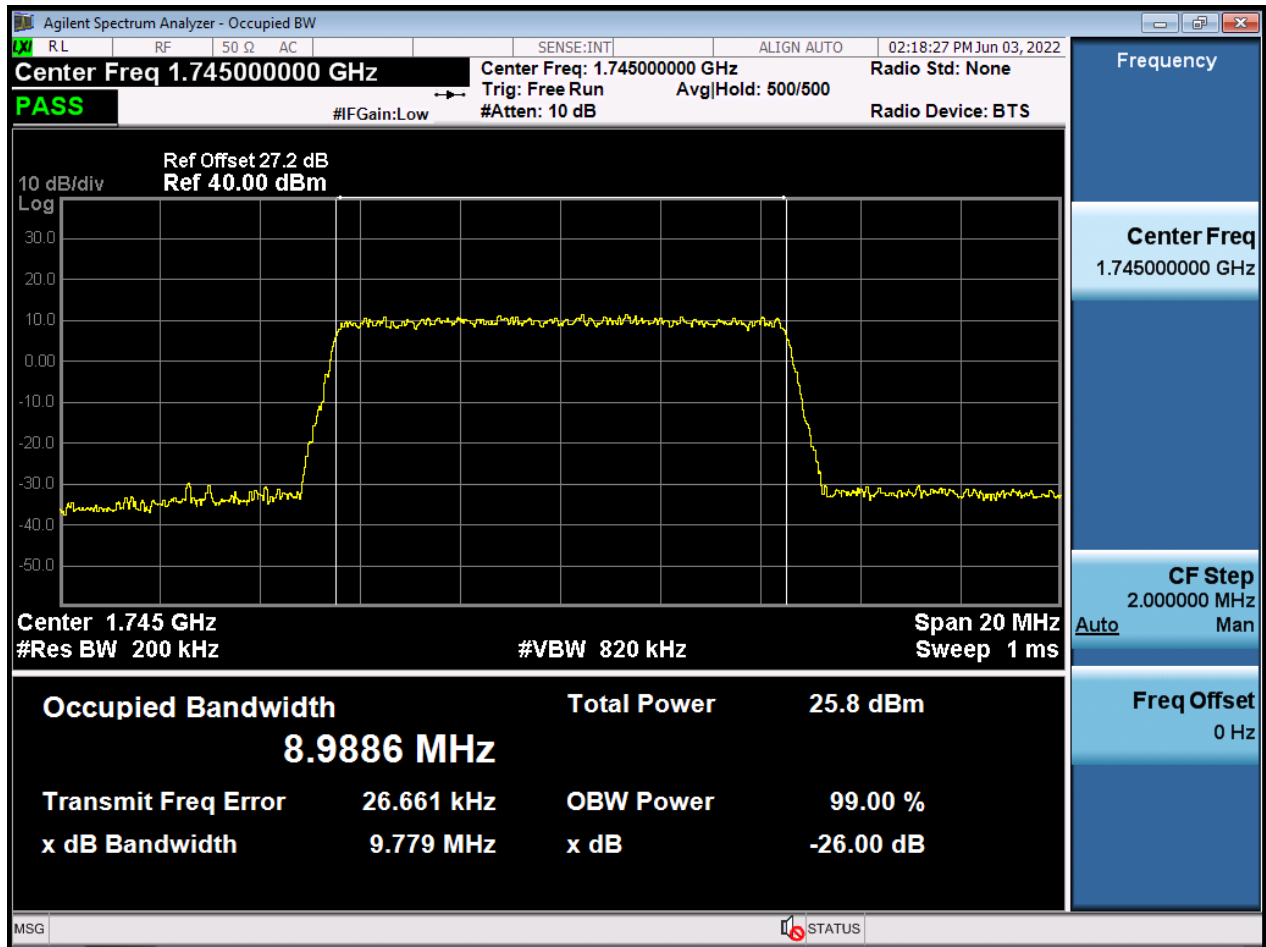


BW15 M_OBW_Middle Channel_QPSK_FullIRB

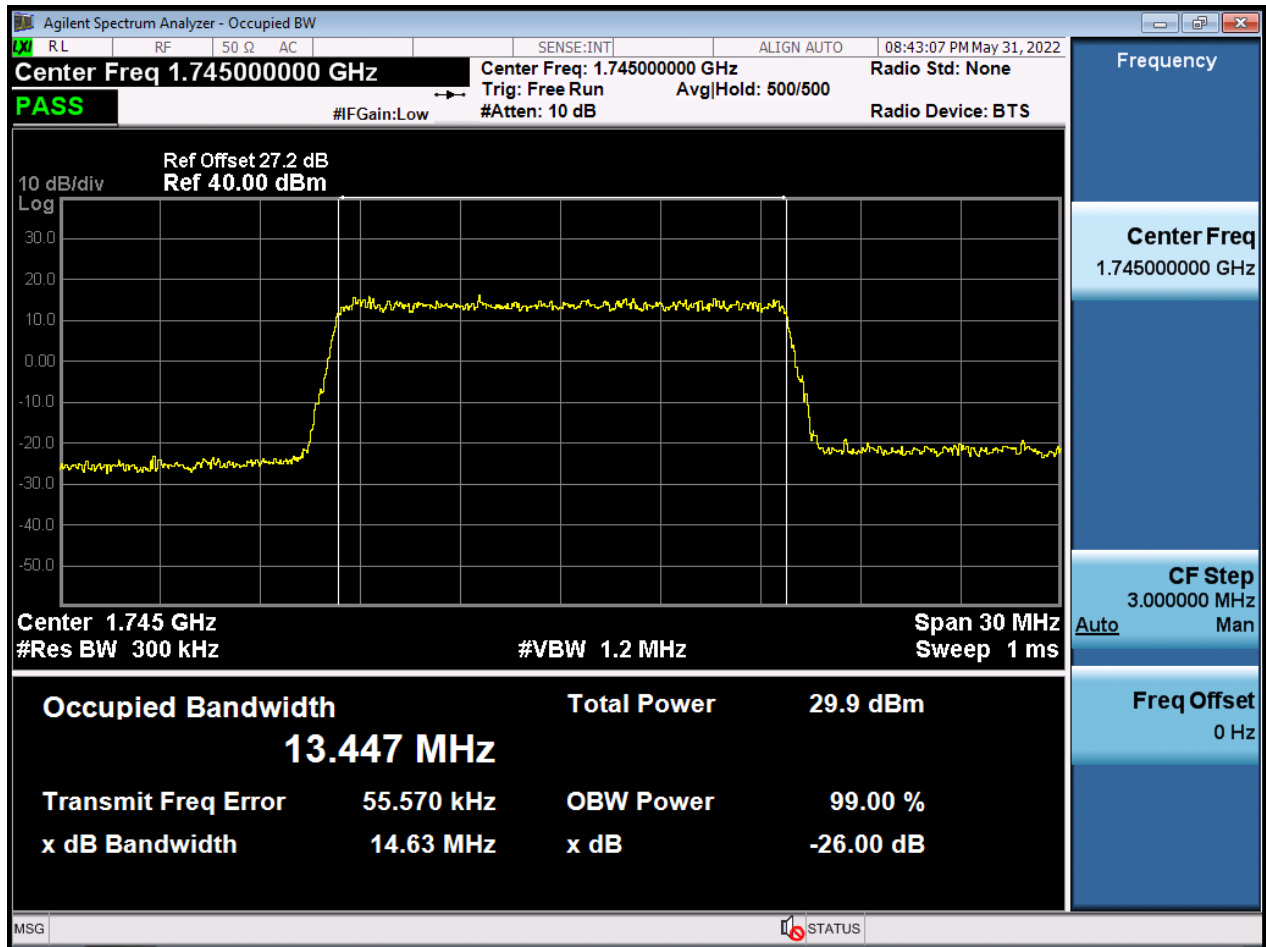


BW15 M_OBW_Middle Channel_16QAM_FullIRB

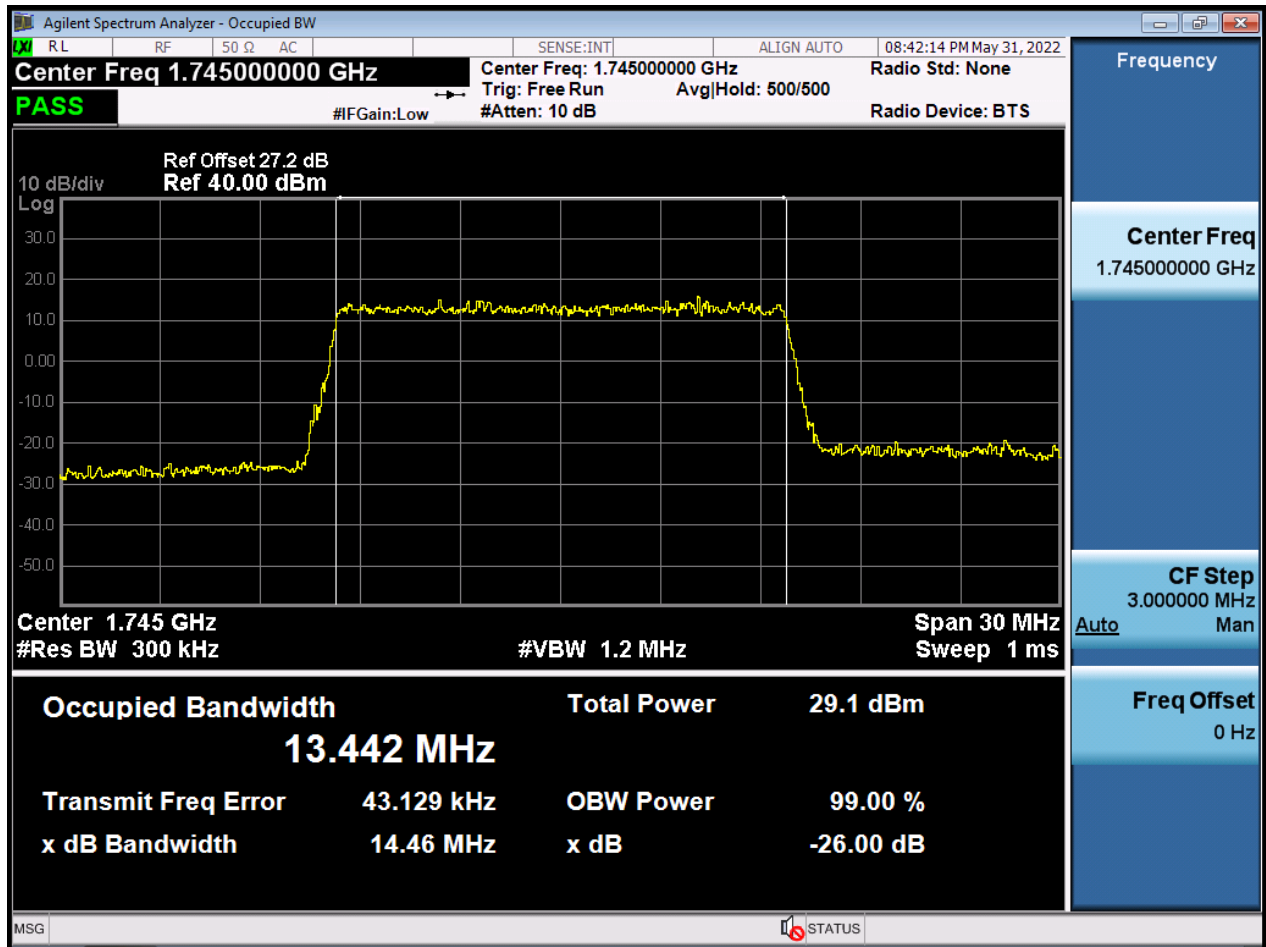


BW15 M_OBW_Middle Channel_64QAM_FullIRB

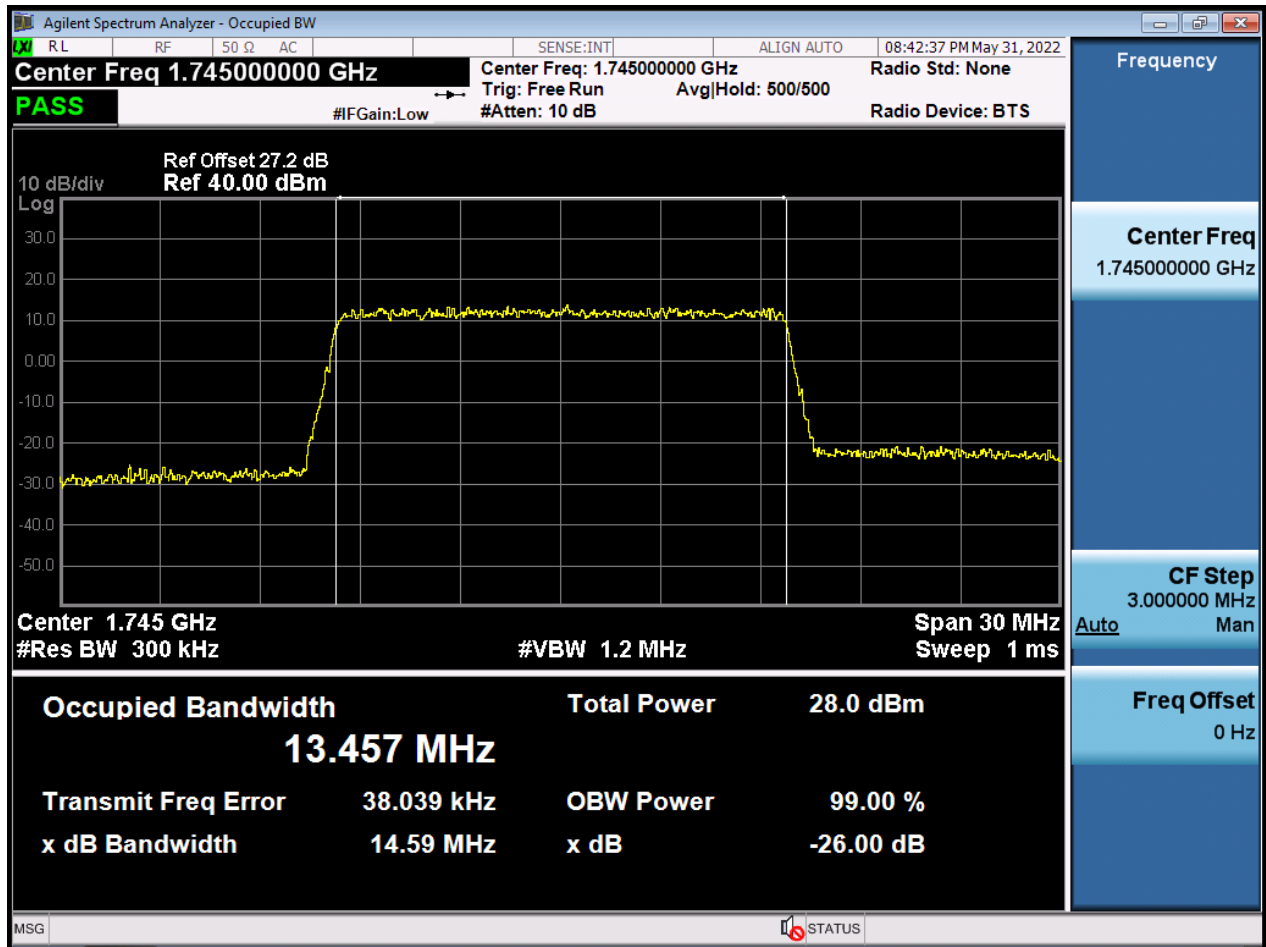


BW15 M_OBW_Middle Channel_256QAM_FullRB

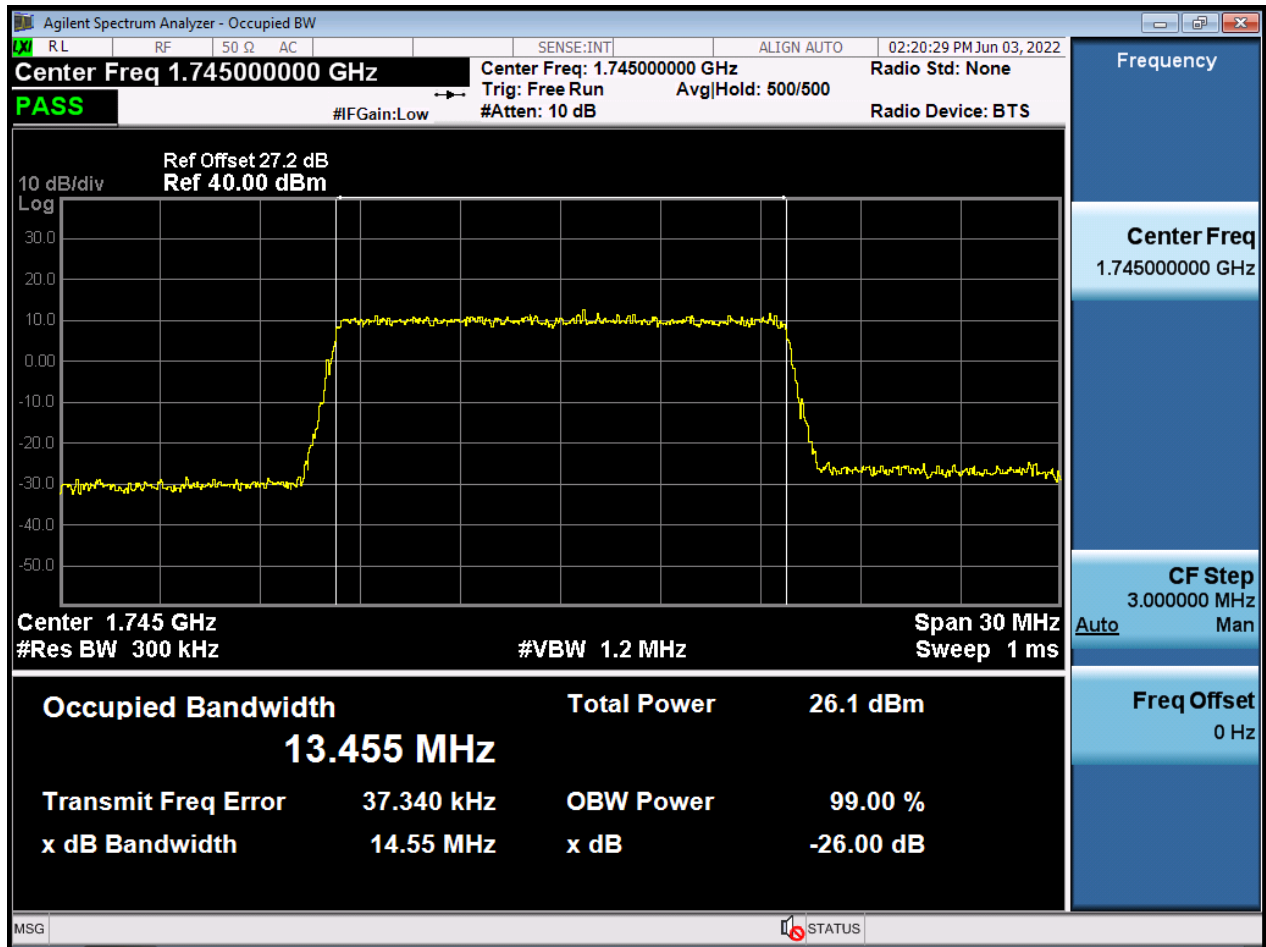


BW20 M_OBW_Middle Channel_QPSK_FullIRB

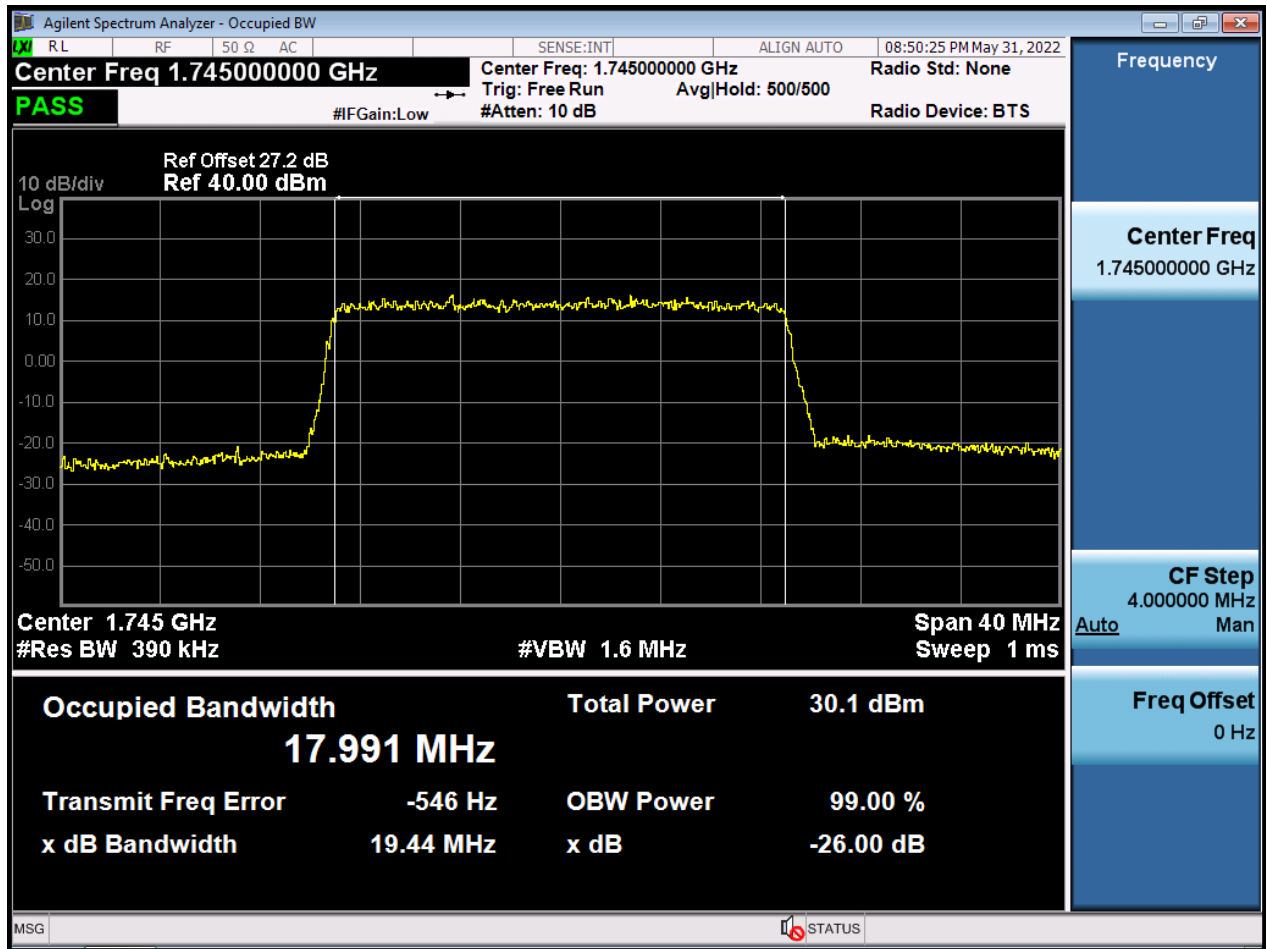


BW20 M_OBW_Middle Channel_16QAM_FullIRB

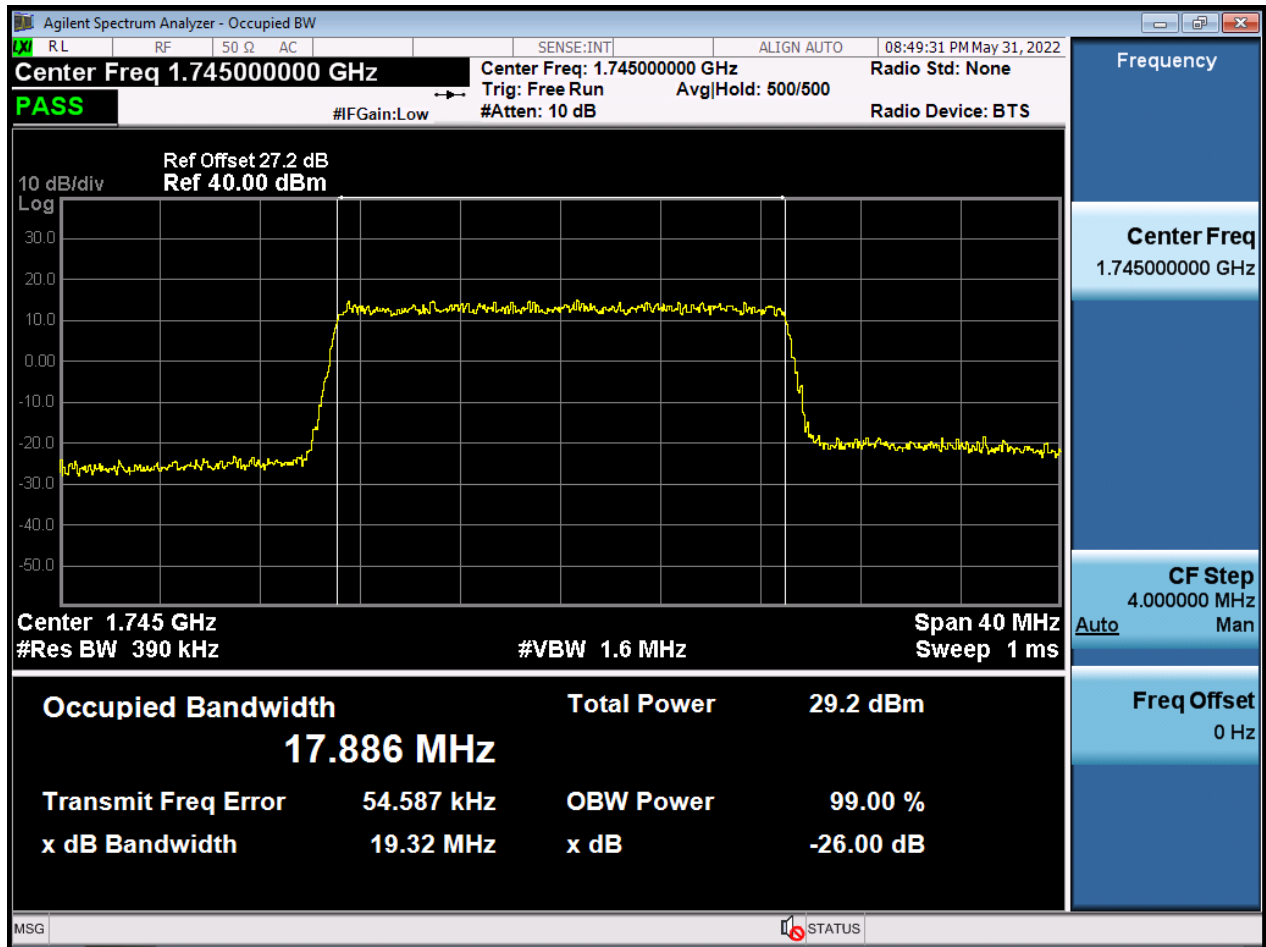


BW20 M_OBW_Middle Channel_64QAM_FullIRB

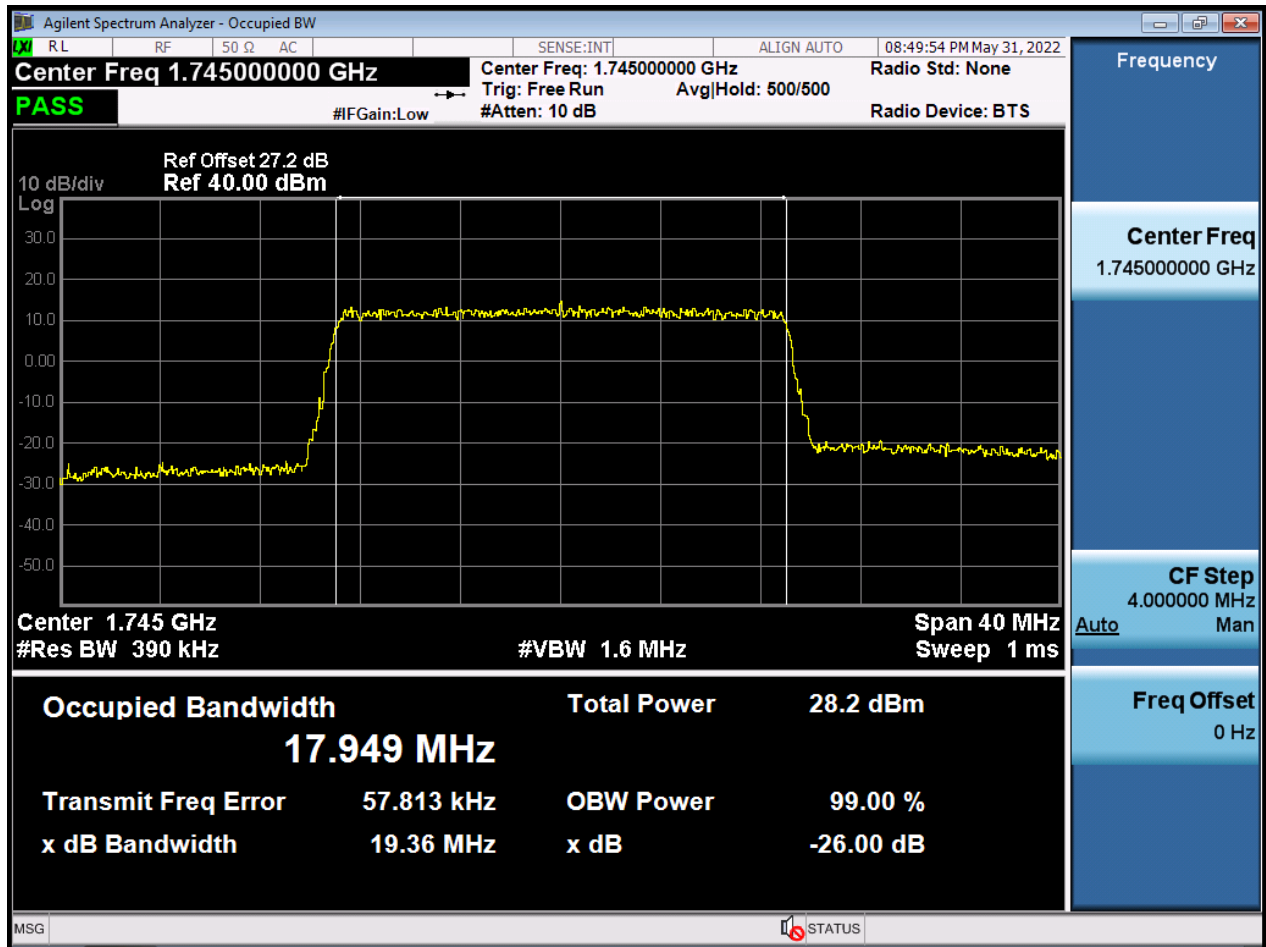


BW20 M_OBW_Middle Channel_256QAM_FullRB

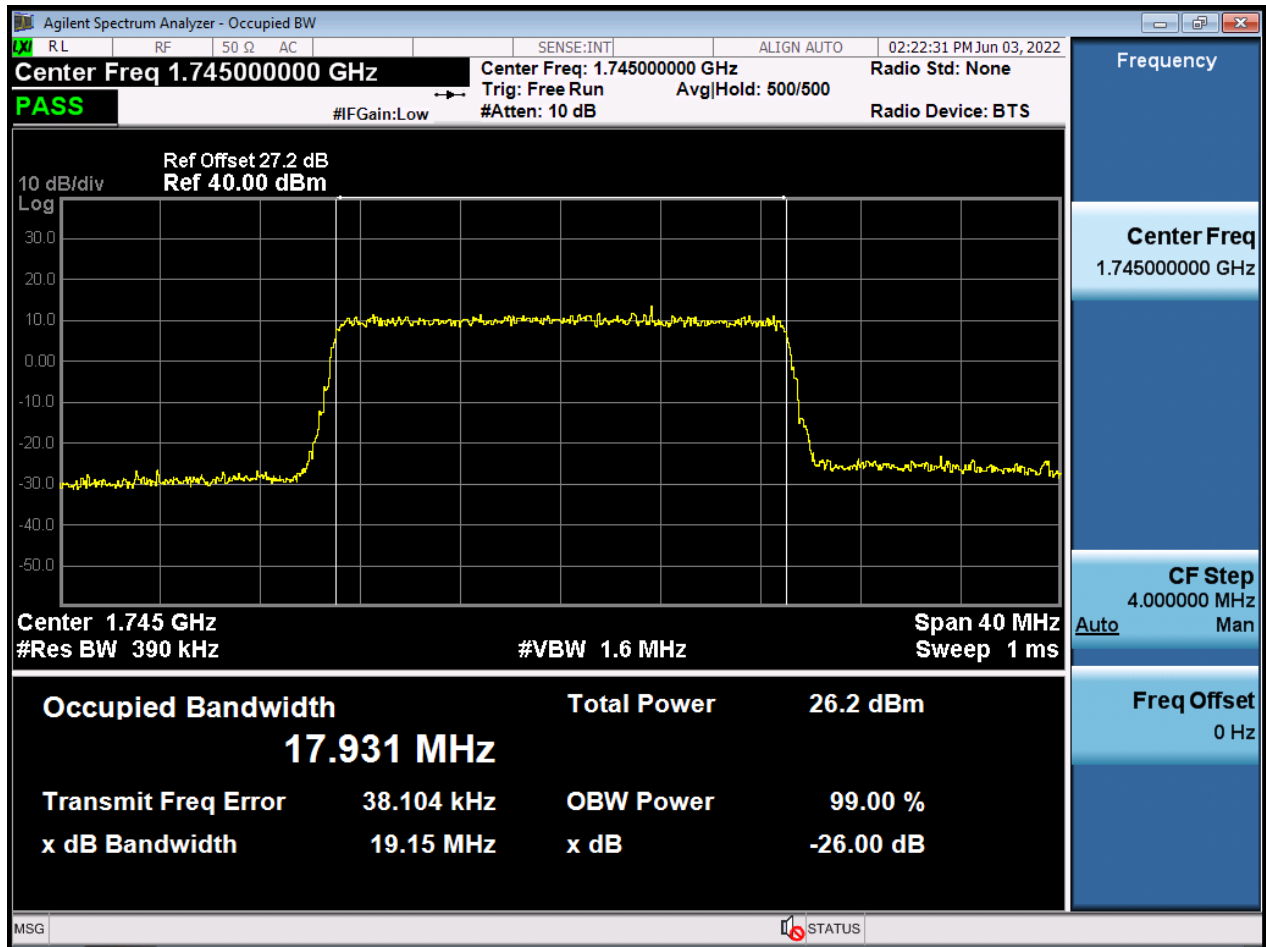


BW1.4 M_PAR_Middle Channel_QPSK_FullIRB

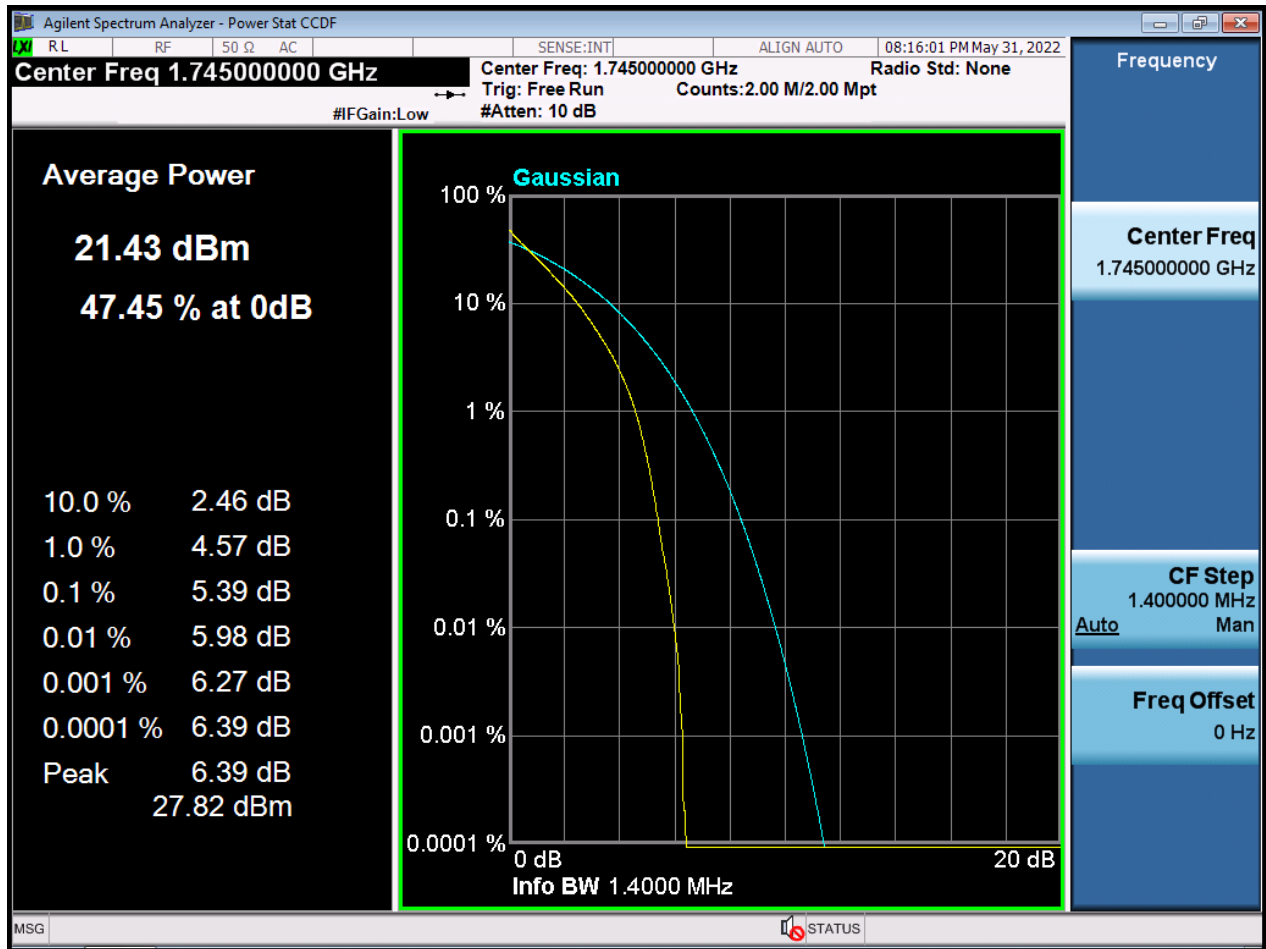


BW1.4 M_PAR_Middle Channel_16QAM_FullIRB

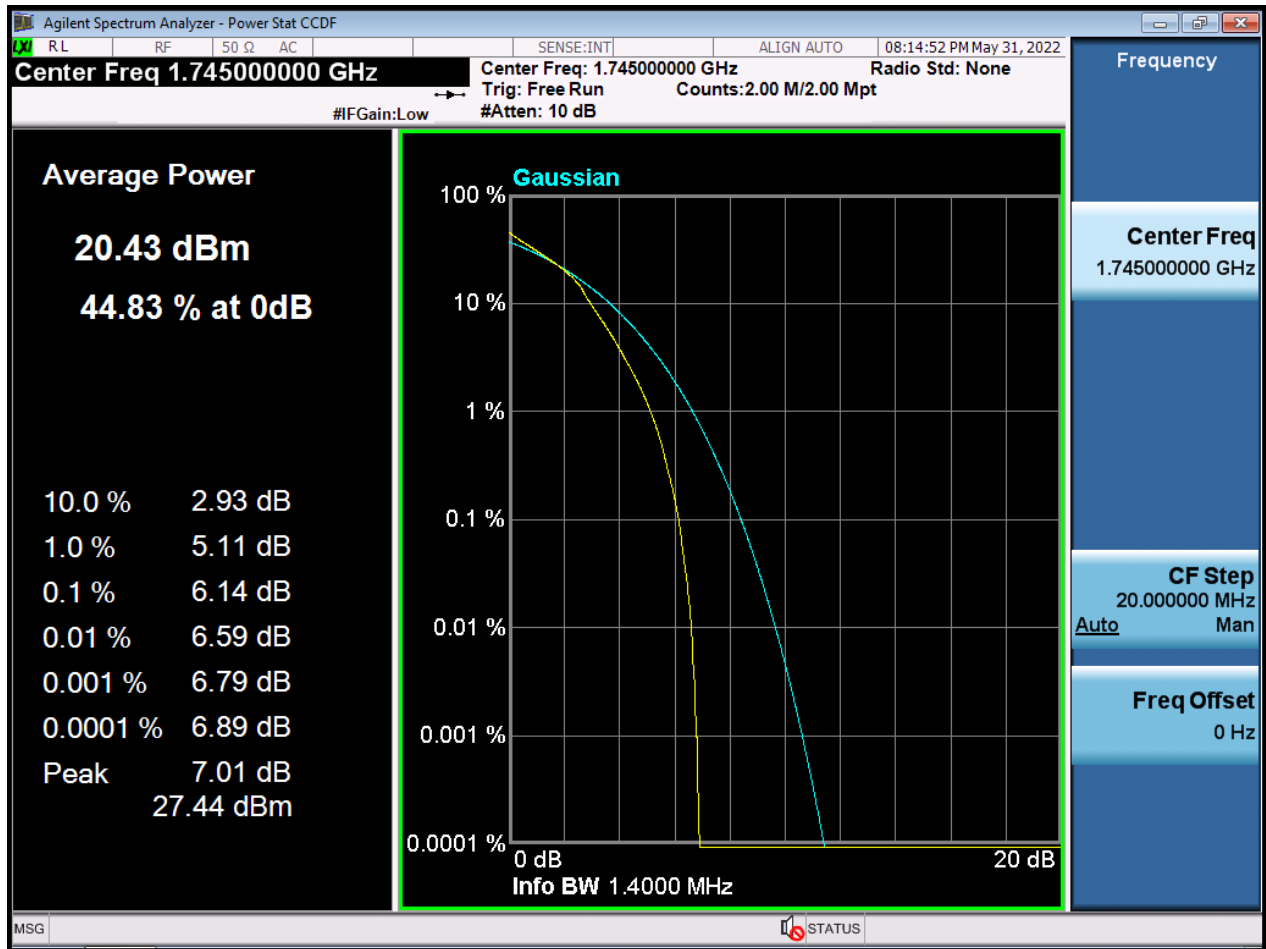


BW1.4 M_PAR_Middle Channel_64QAM_FullRB

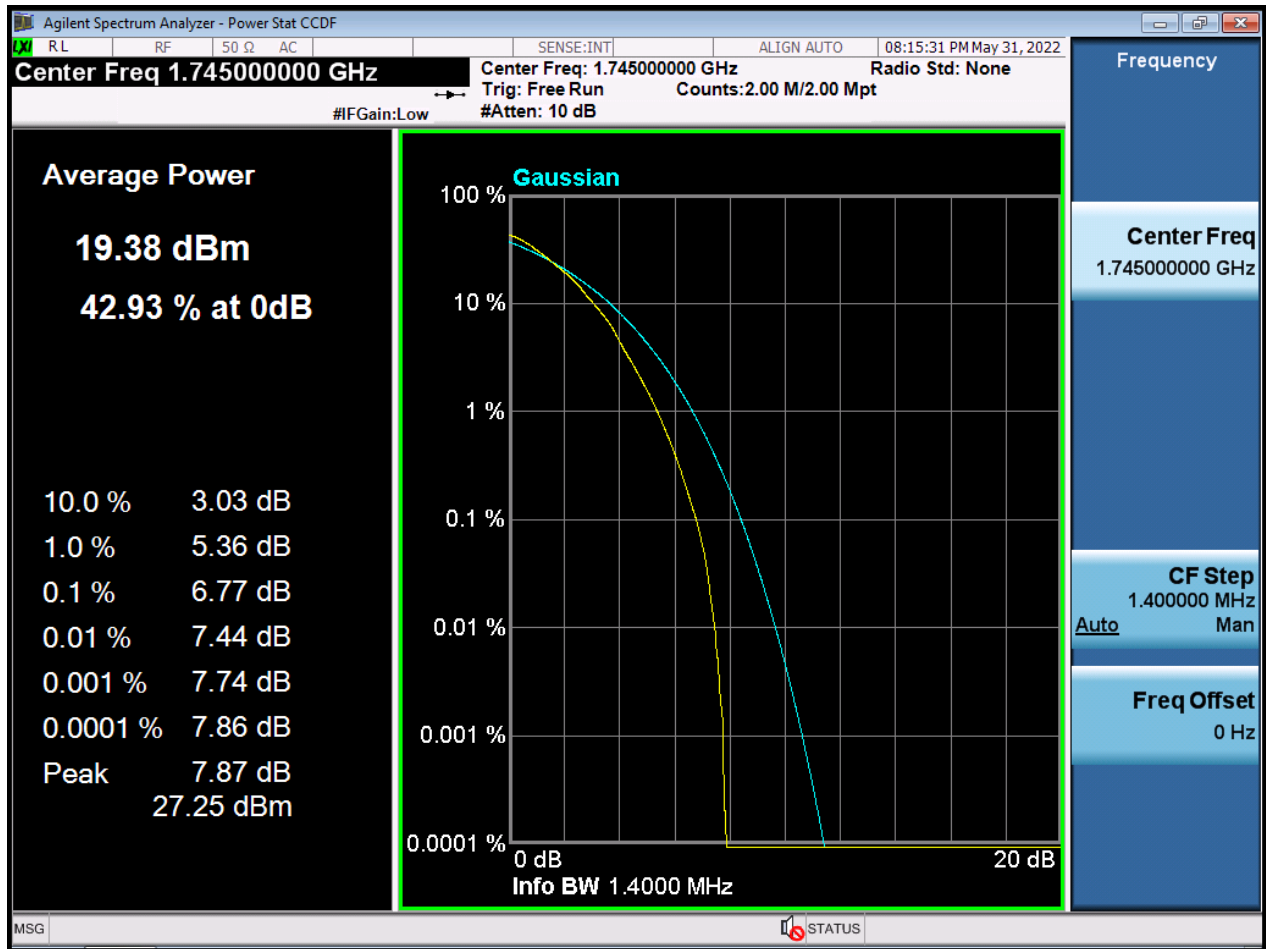


BW1.4 M_PAR_Middle Channel_256QAM_FullRB

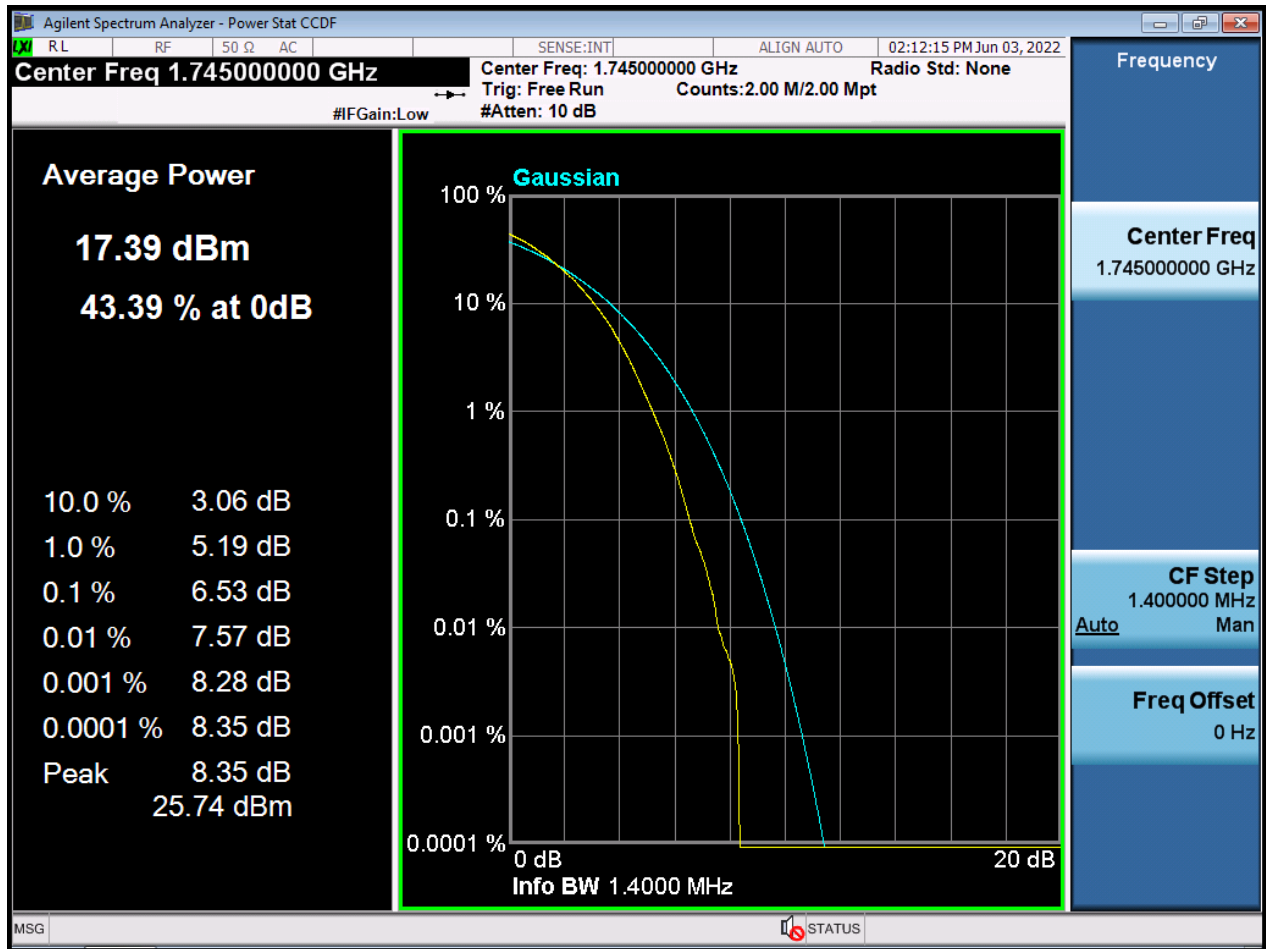


BW3 M_PAR_Middle Channel_QPSK_FullIRB

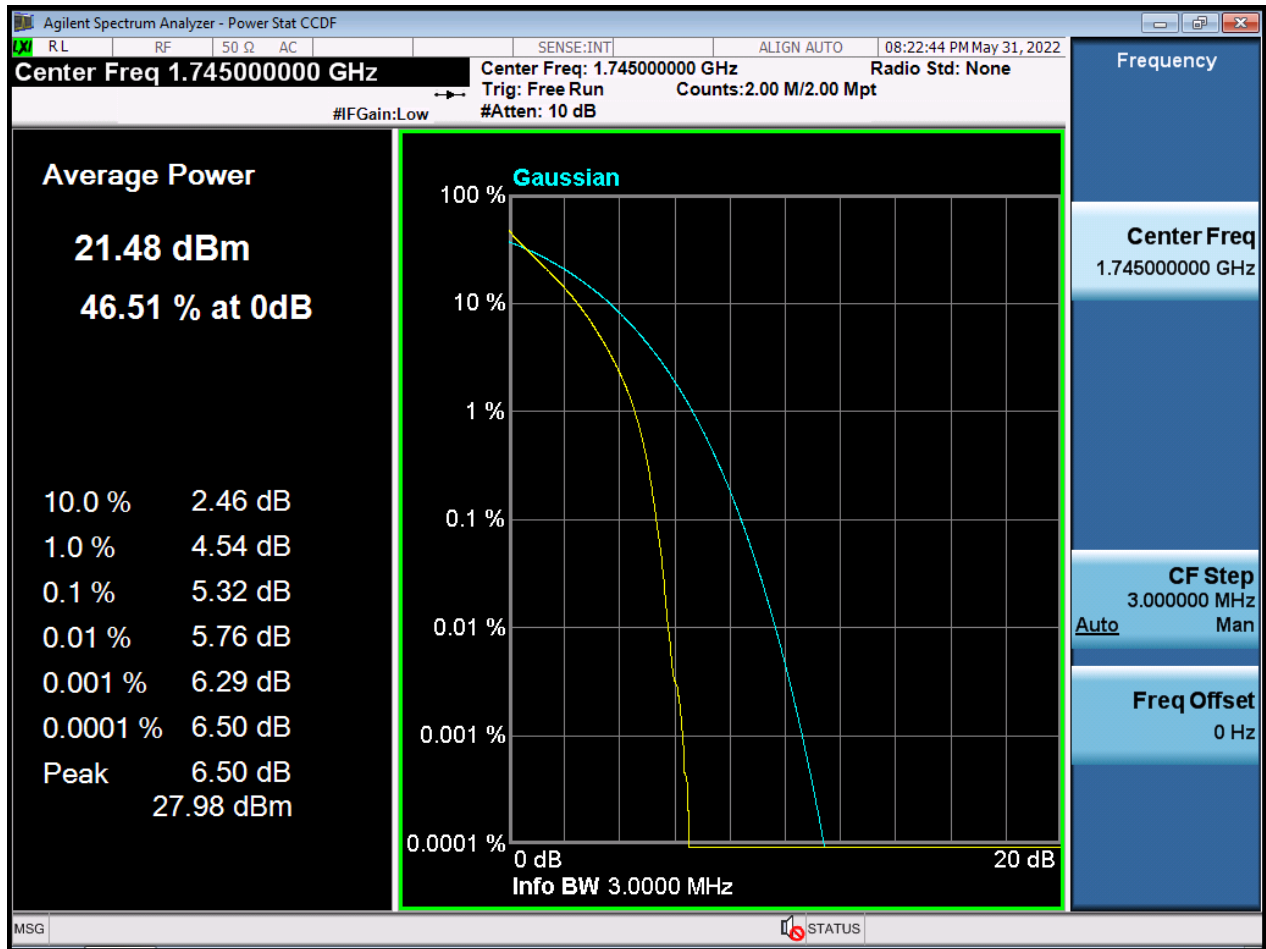


BW3 M_PAR_Middle Channel_16QAM_FullRB

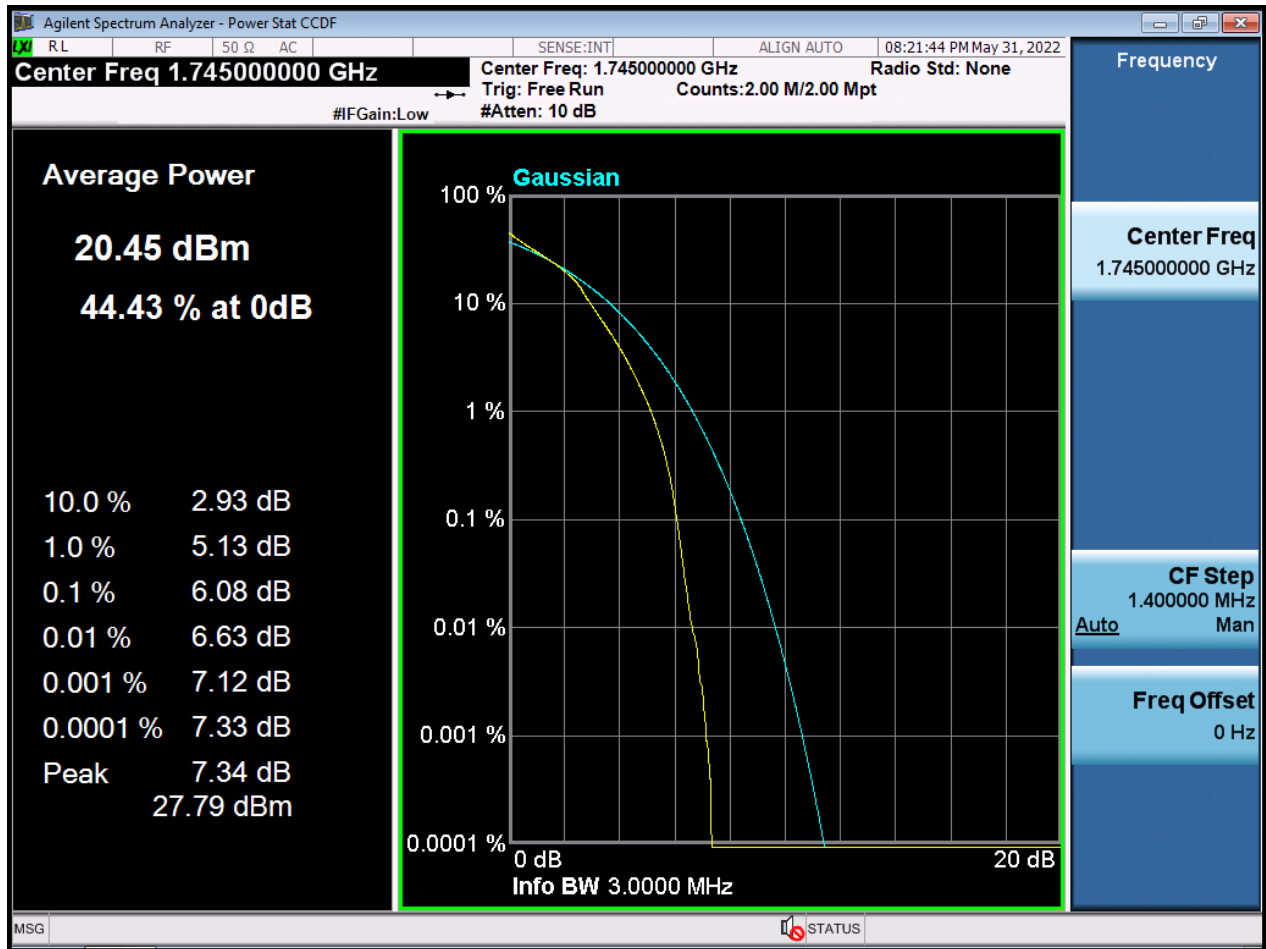


BW3 M_PAR_Middle Channel_64QAM_FullRB

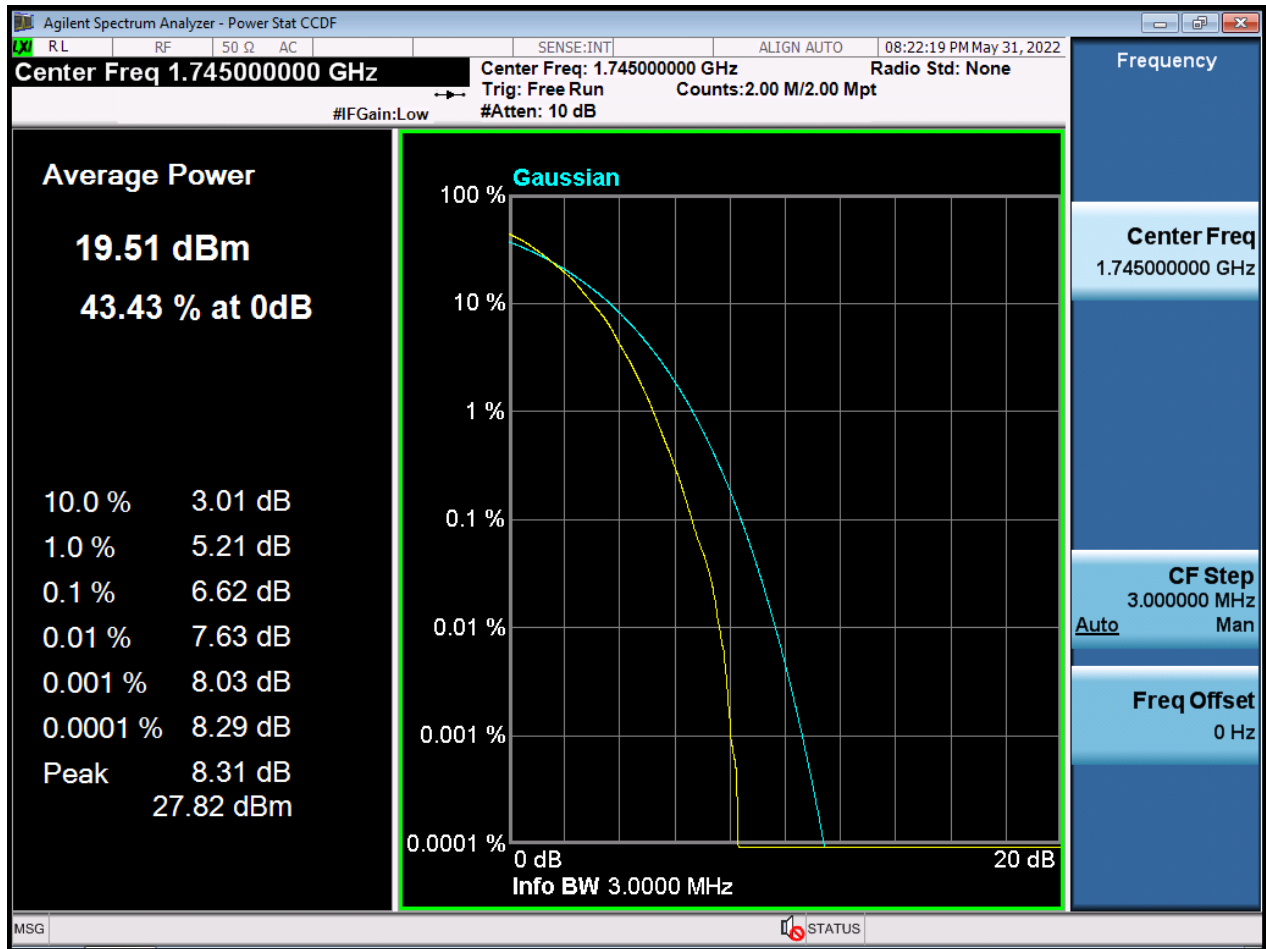


BW3 M_PAR_Middle Channel_256QAM_FullRB

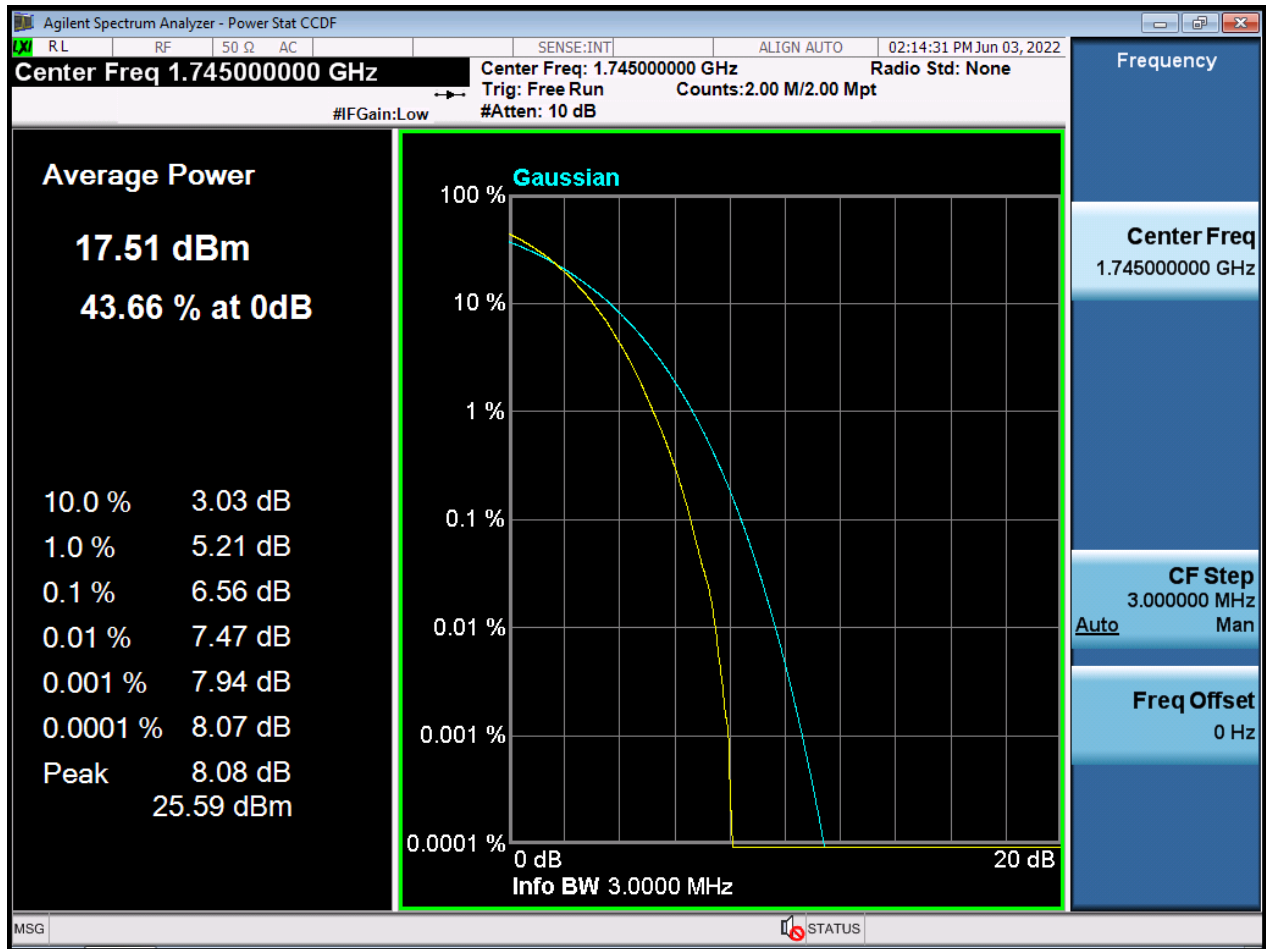


BW5 M_PAR_Middle Channel_QPSK_FullIRB

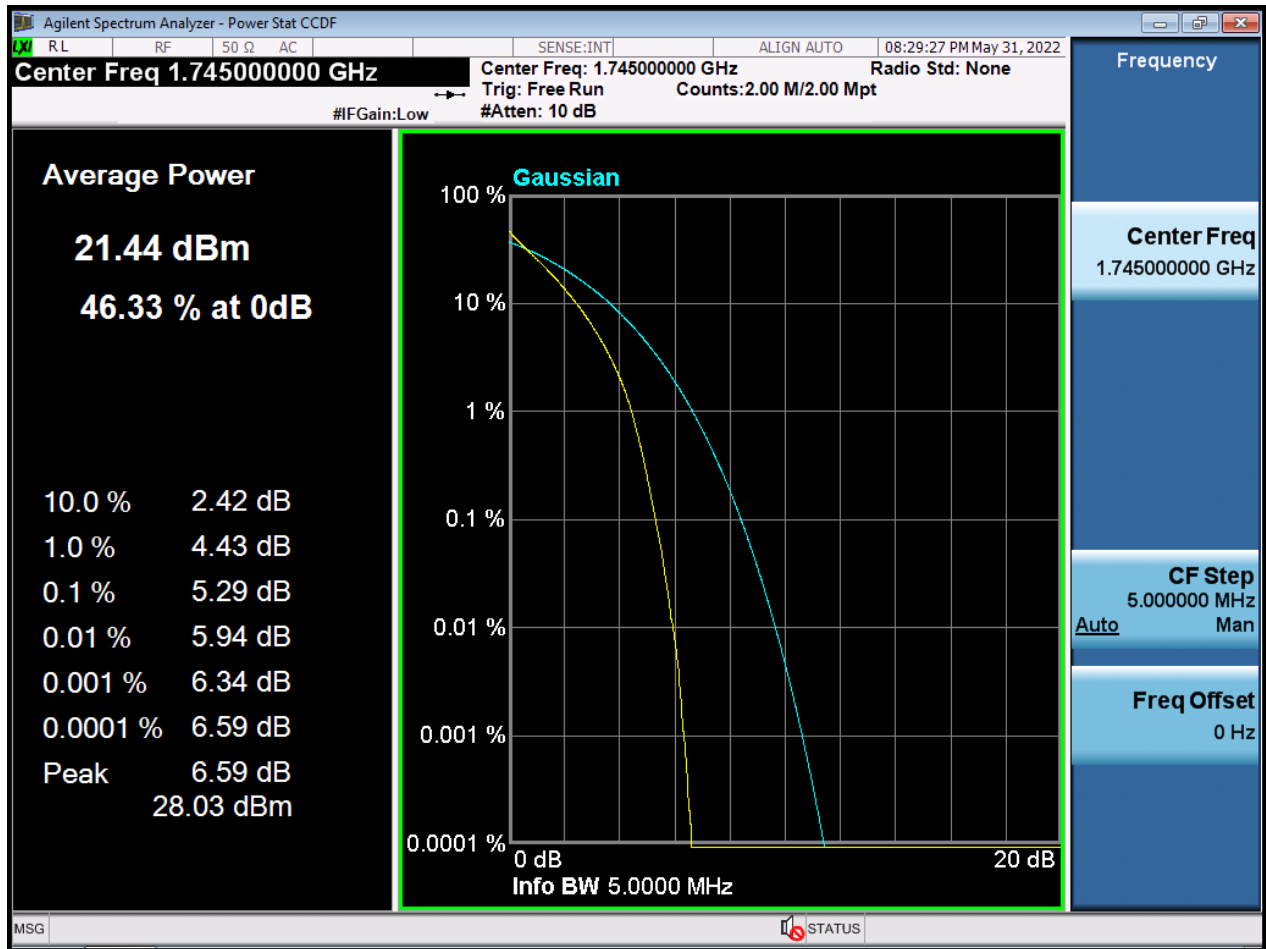


BW5 M_PAR_Middle Channel_16QAM_FuIRB

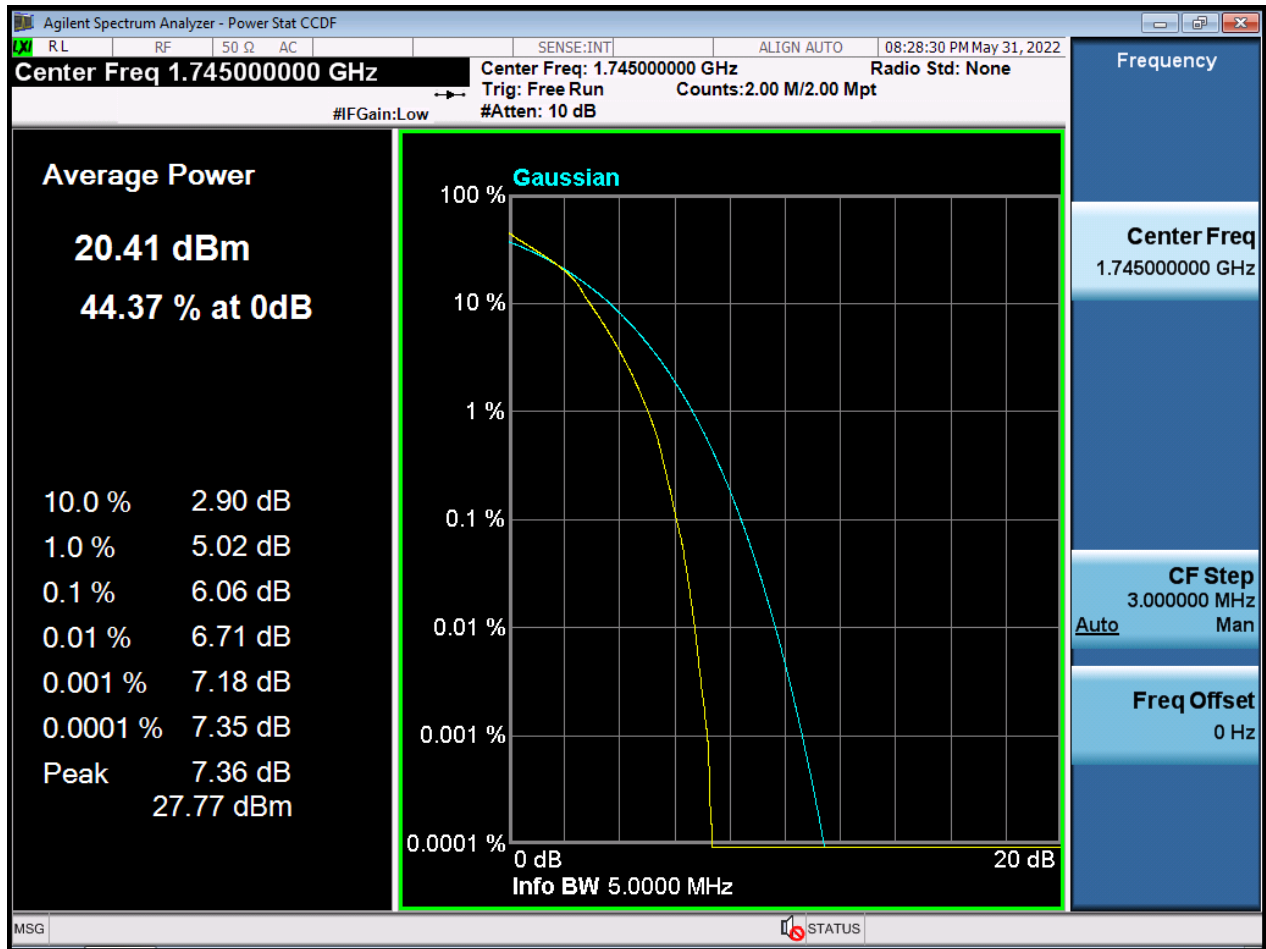


BW5 M_PAR_Middle Channel_64QAM_FuIRB

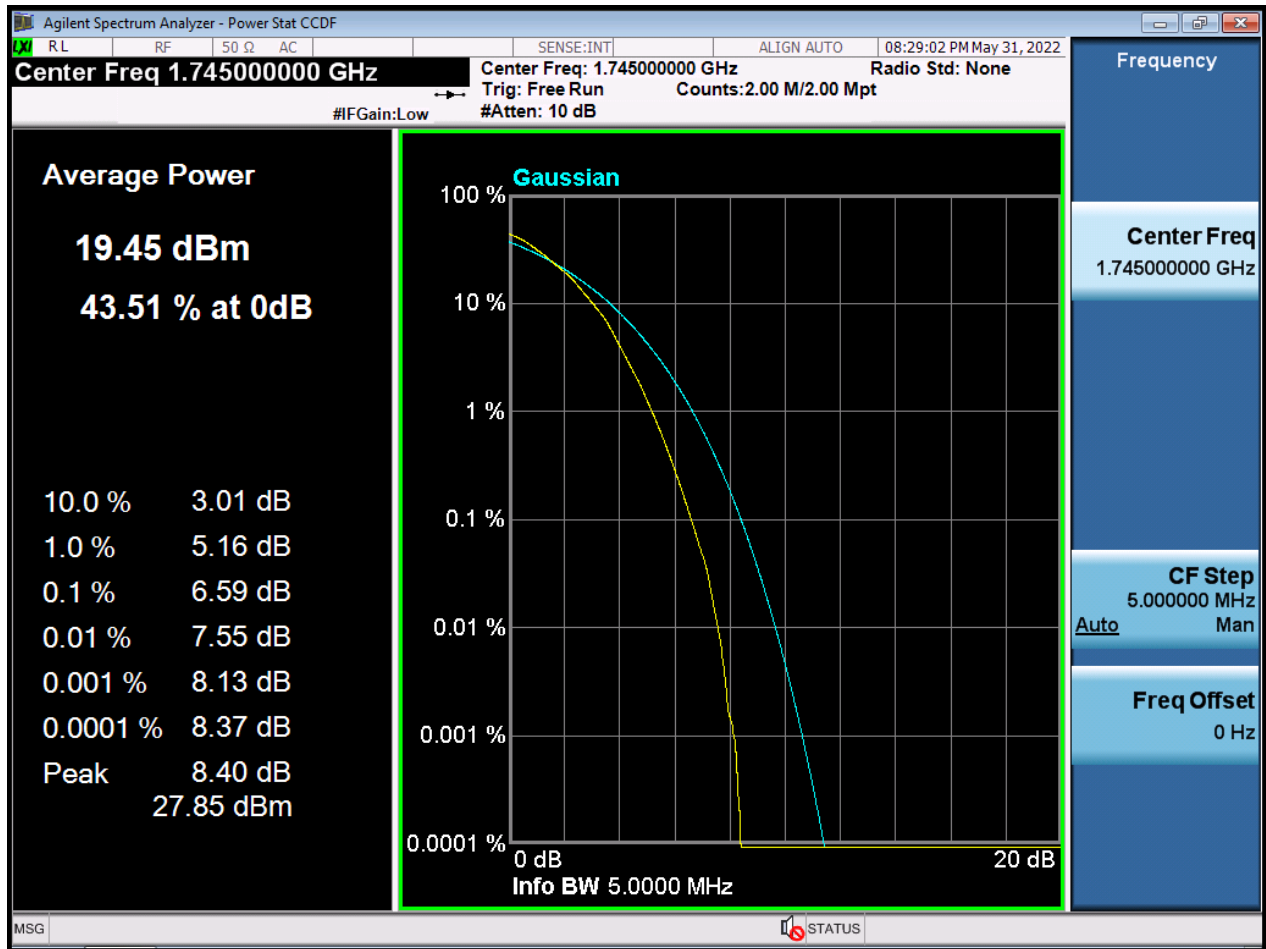


BW5 M_PAR_Middle Channel_256QAM_FullRB

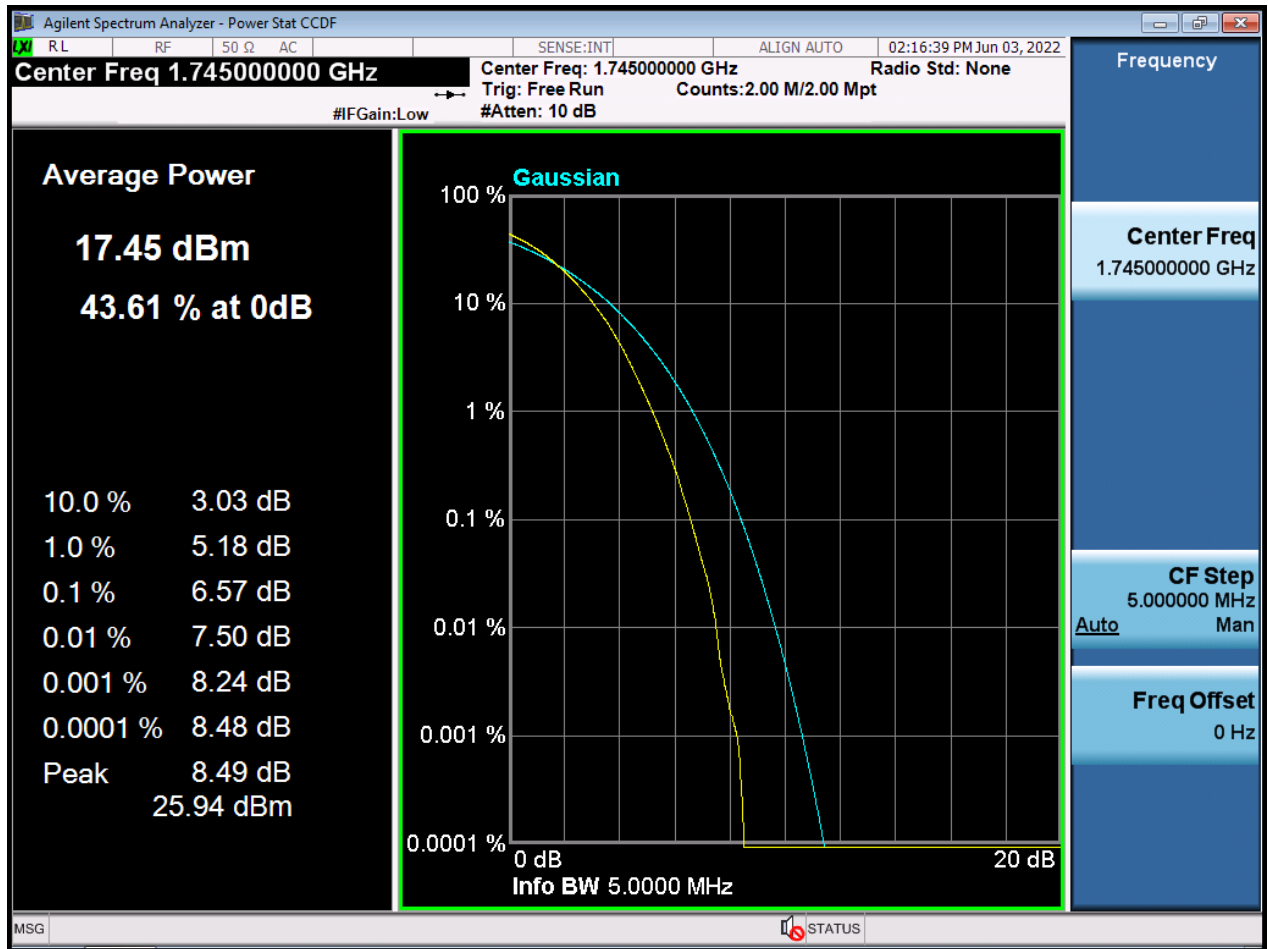


BW10 M_PAR_Middle Channelz_QPSK_FullRB

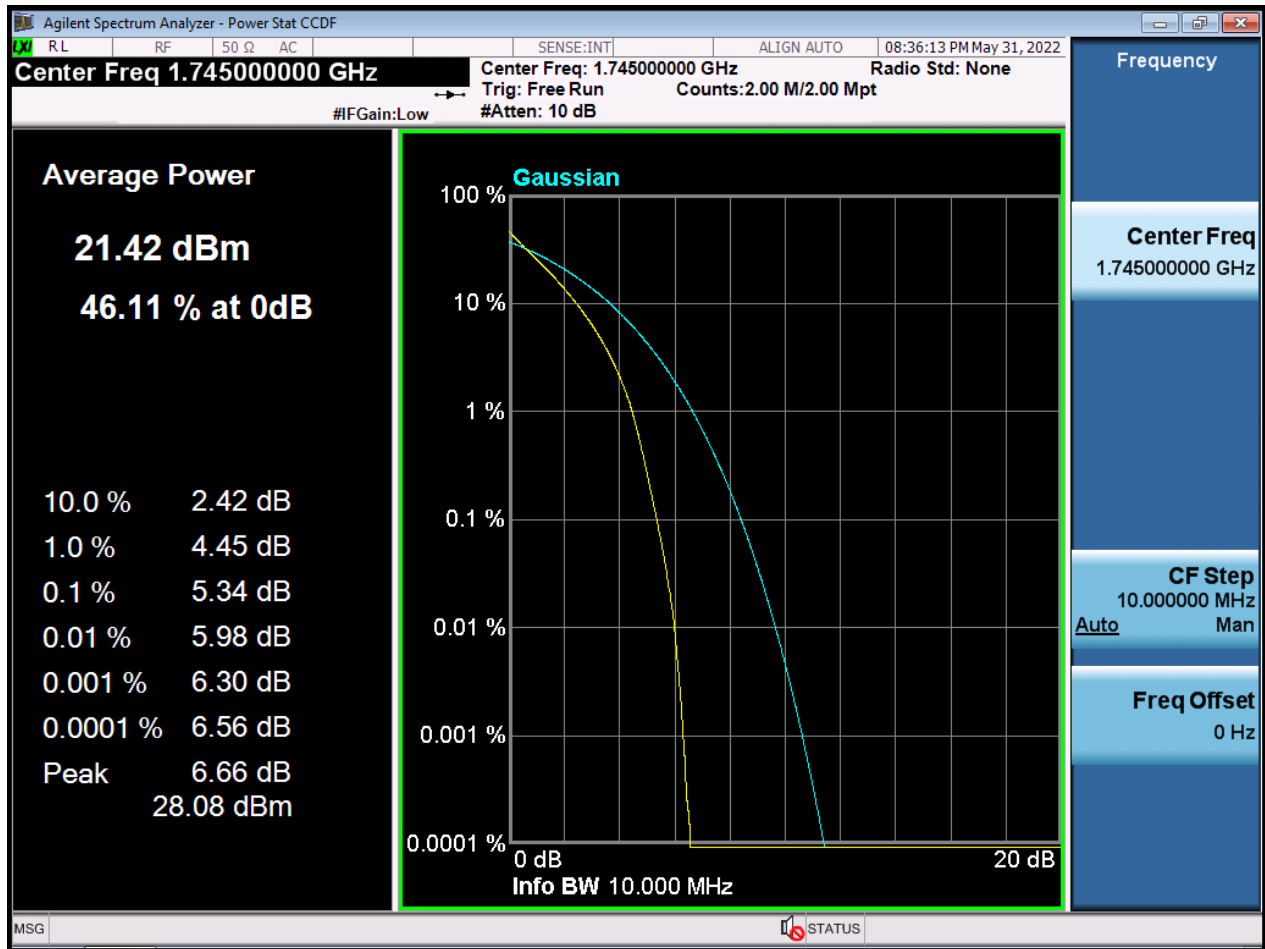


BW10 M_PAR_Middle Channel_16QAM_FullRB

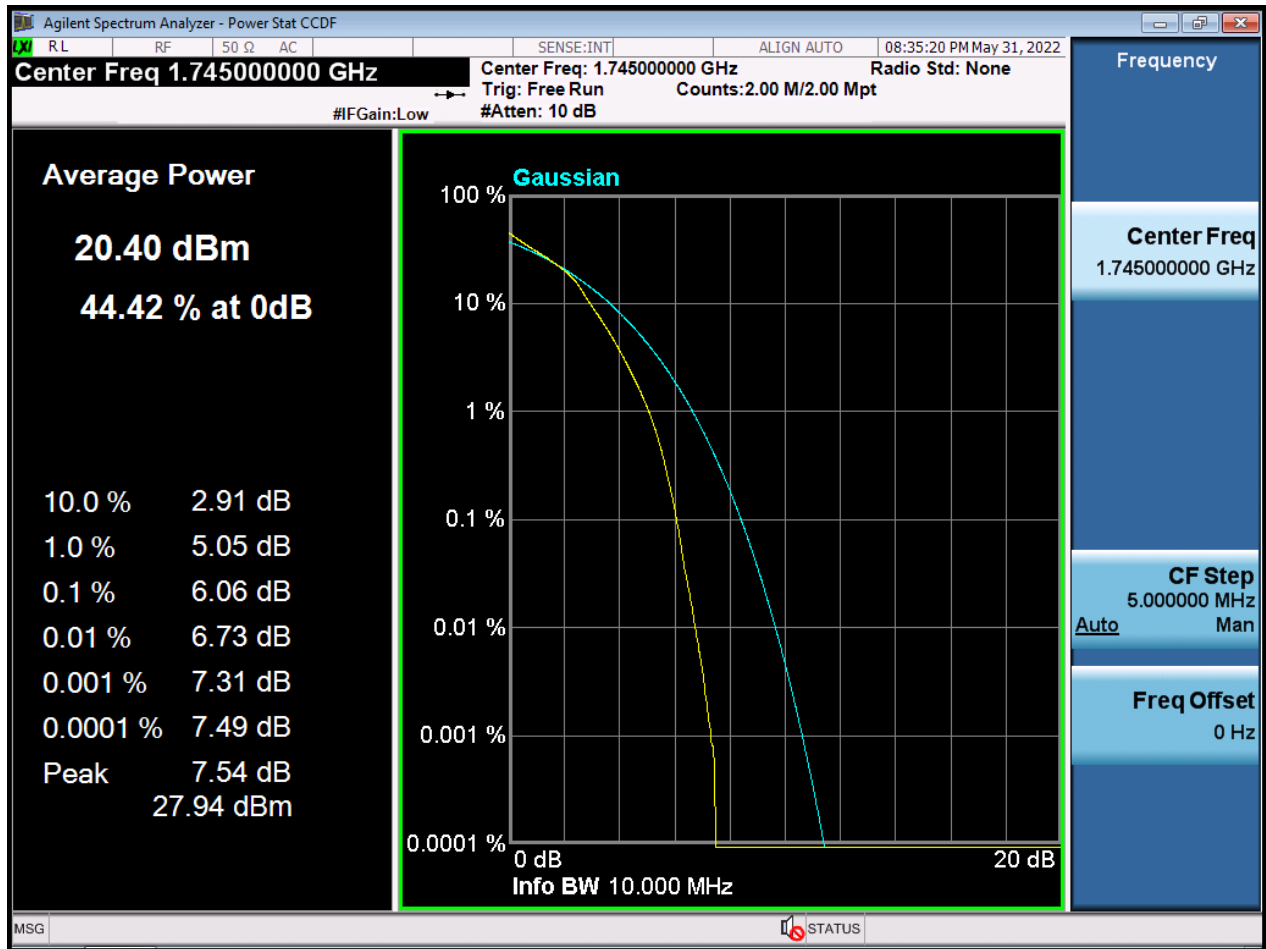


BW10 M_PAR_Middle Channel_64QAM_FullRB

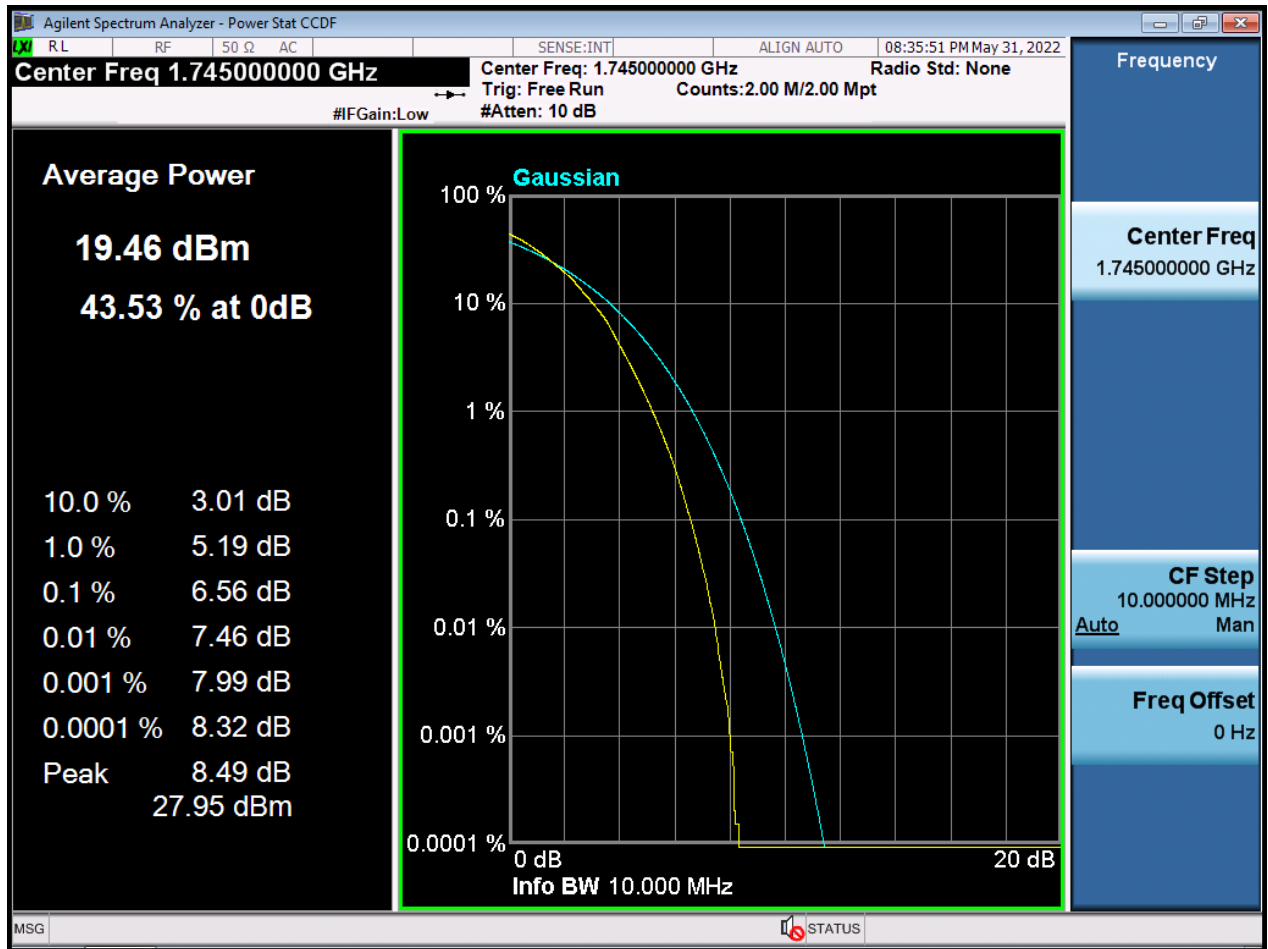


BW10 M_PAR_Middle Channel_256QAM_FullIRB

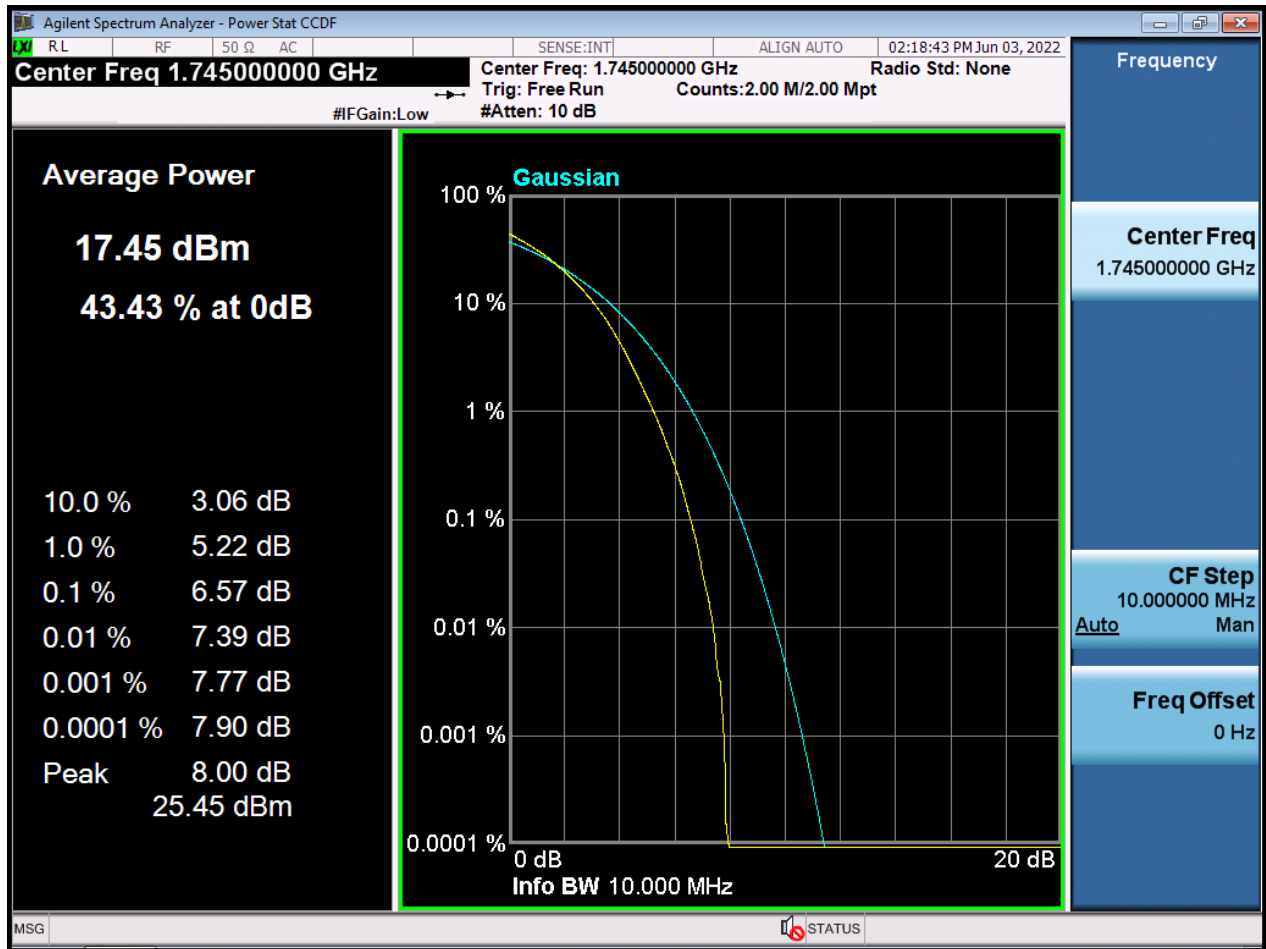


BW15 M_PAR_Middle Channel_QPSK_FullRB

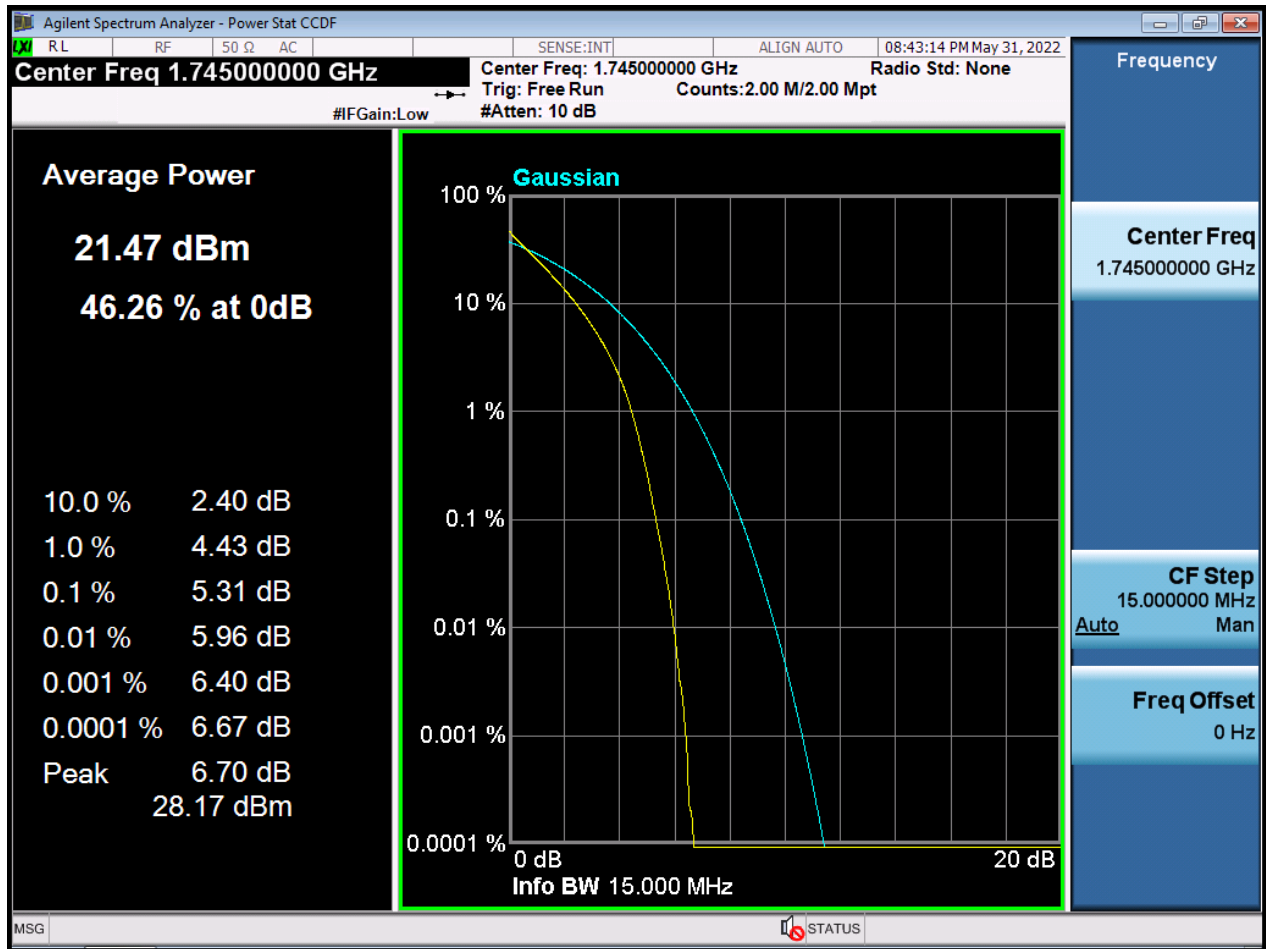


BW15 M_PAR_Middle Channel_16QAM_FullRB

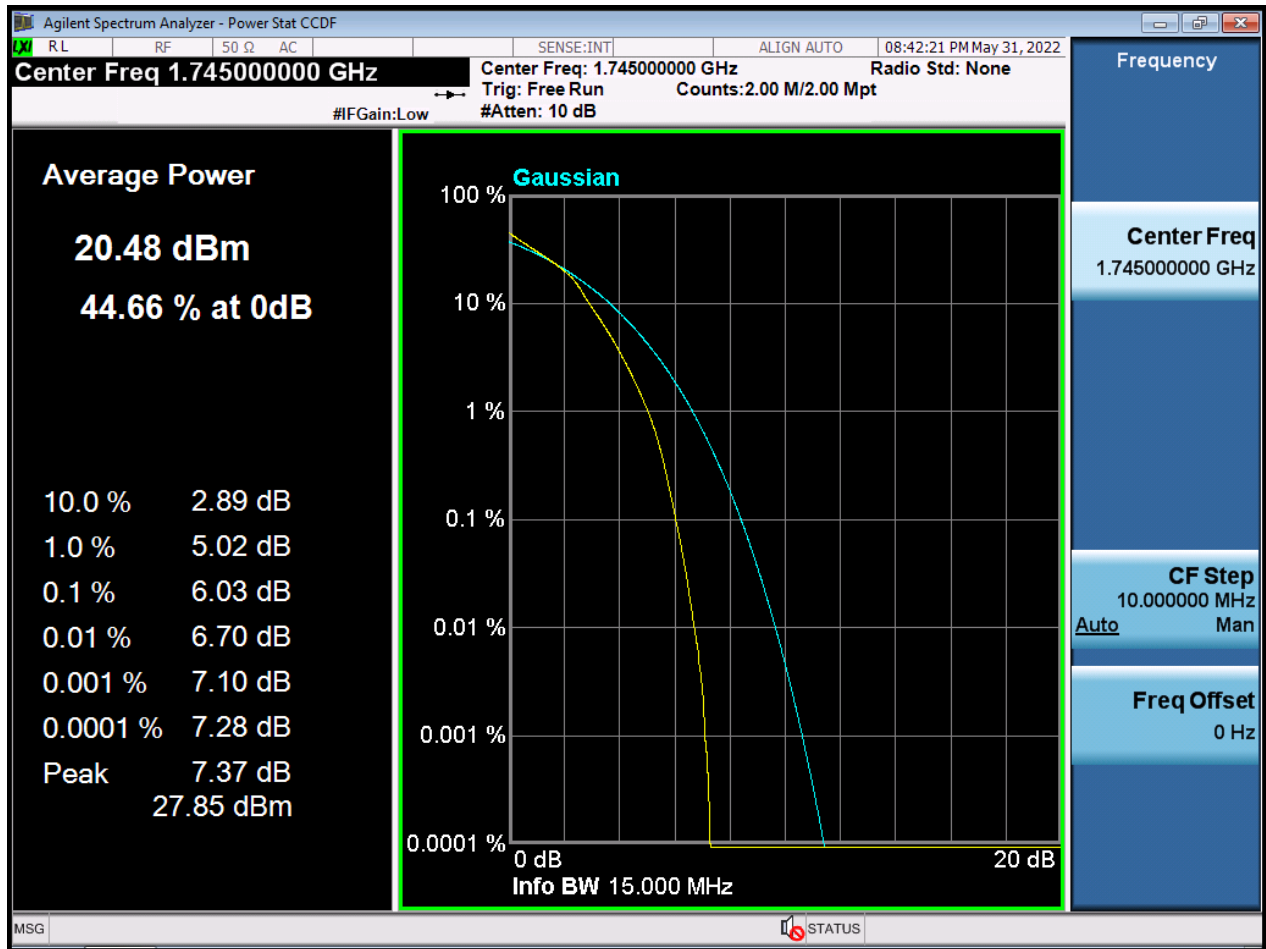


BW15 M_PAR_Middle Channel_64QAM_FullRB

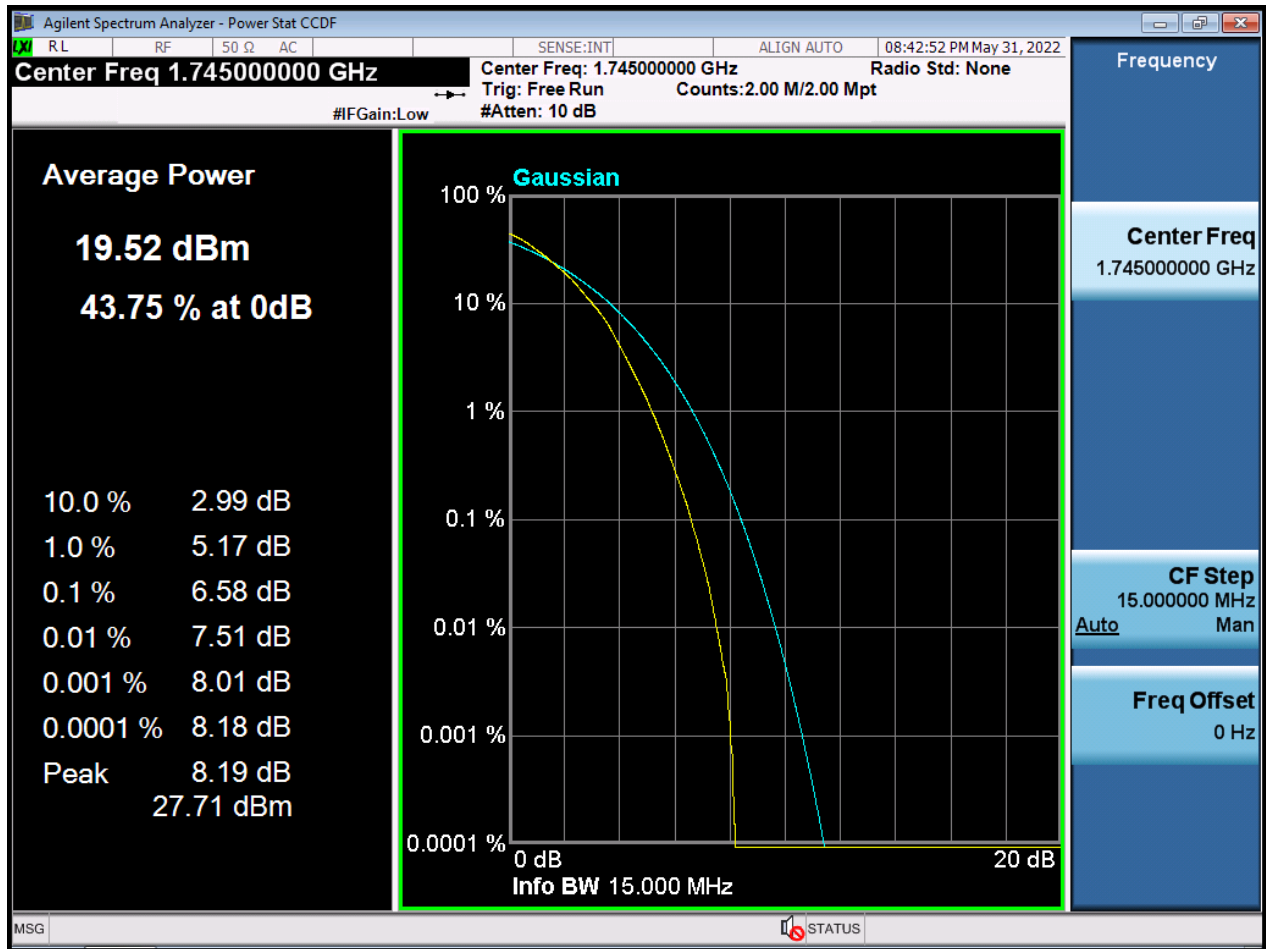


BW15 M_PAR_Middle Channel_256QAM_FullIRB

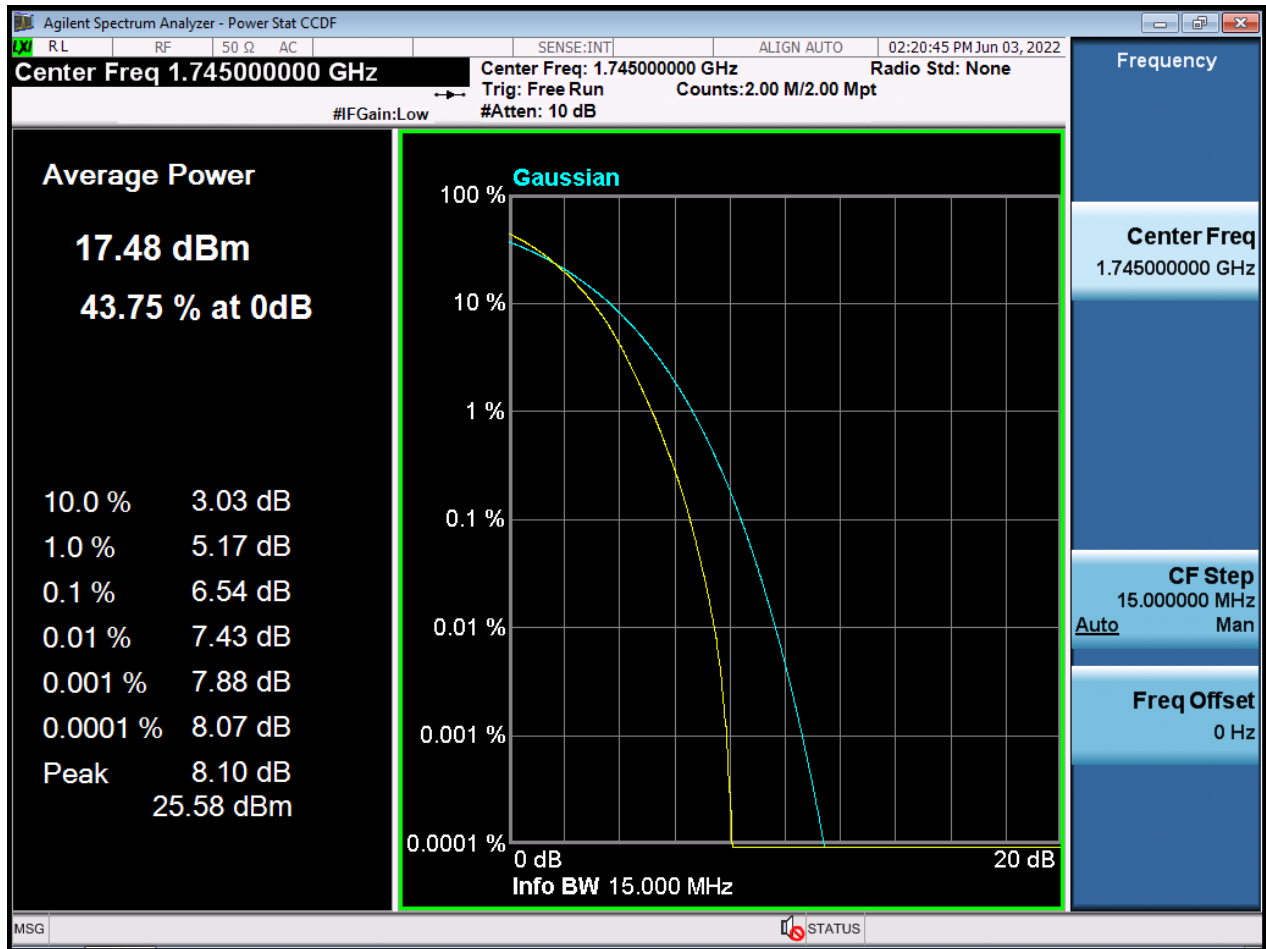


BW20 M_PAR_Middle Channel_QPSK_FullRB

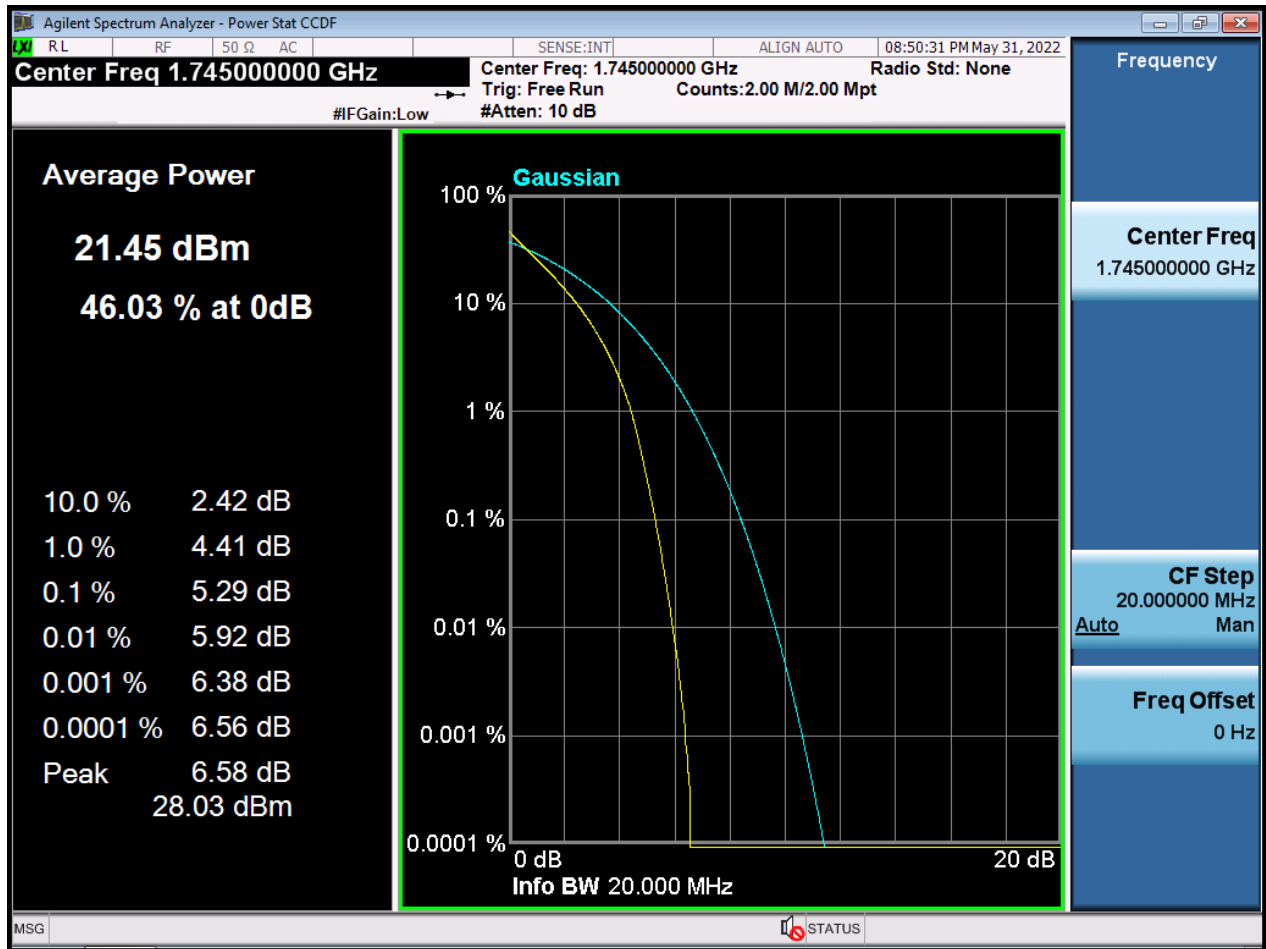


BW20 M_PAR_Middle Channel_16QAM_FullRB

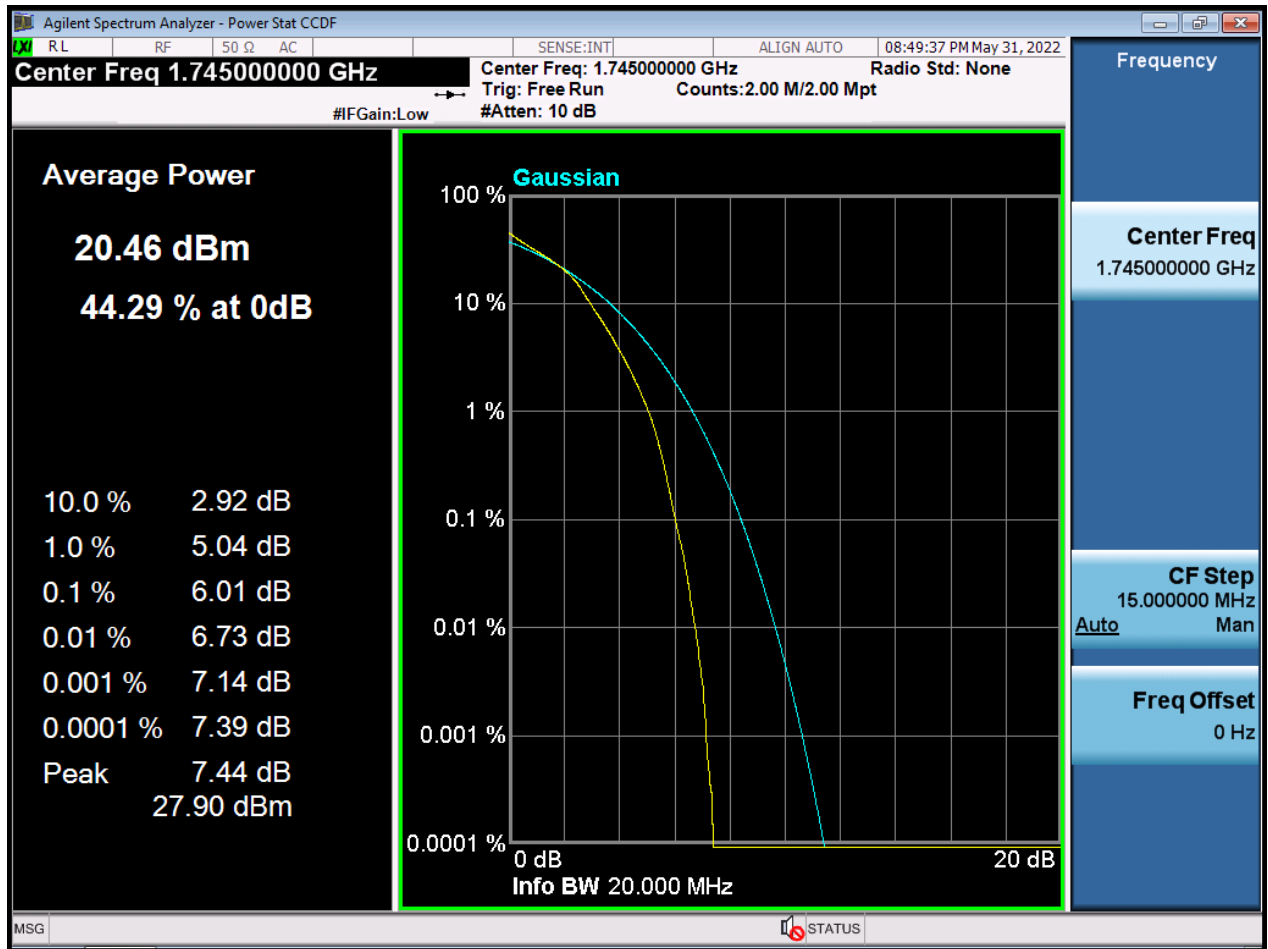


BW20 M_PAR_Middle Channel_64QAM_FullRB

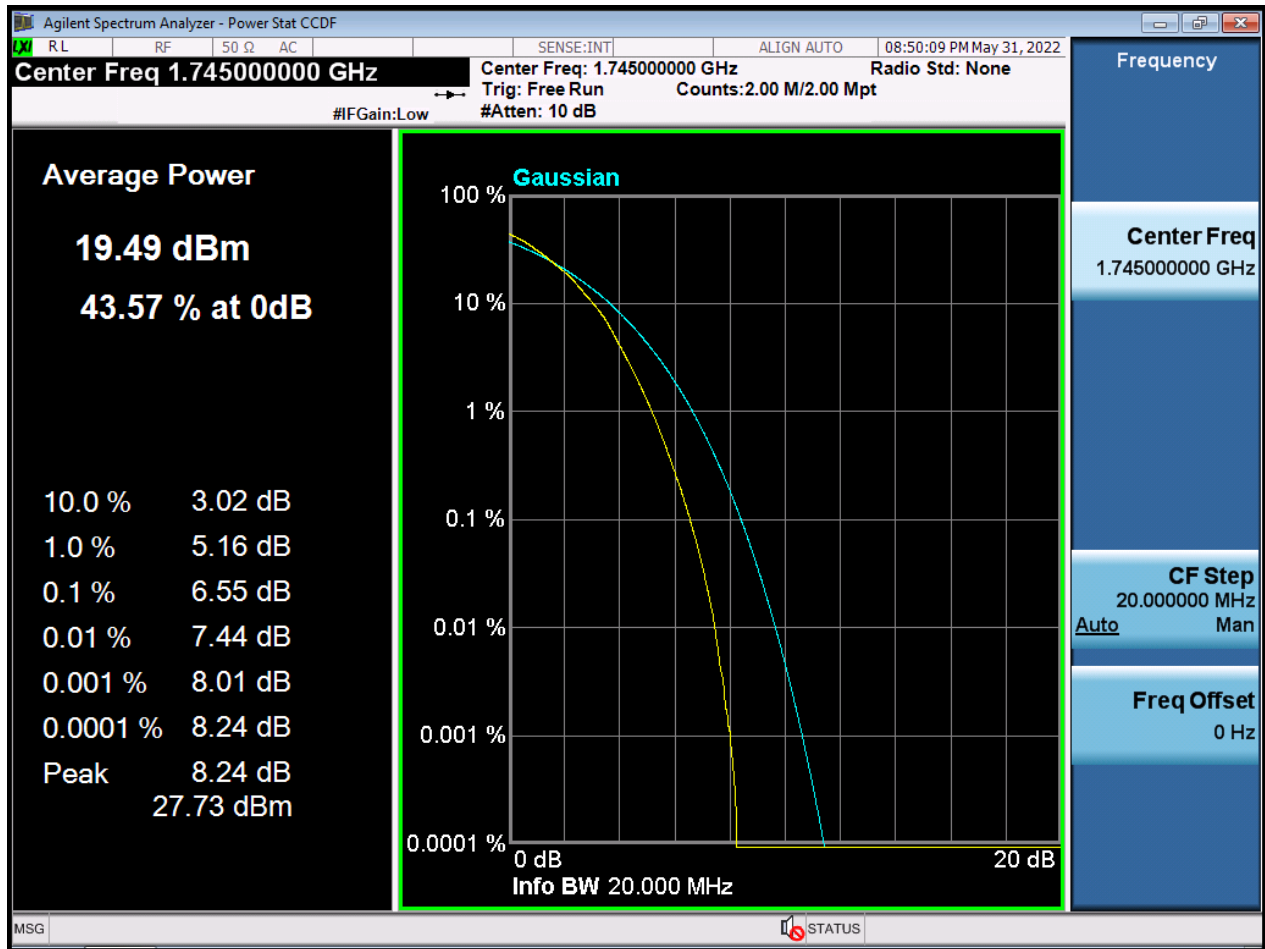


BW20 M_PAR_Middle Channel_256QAM_FullIRB

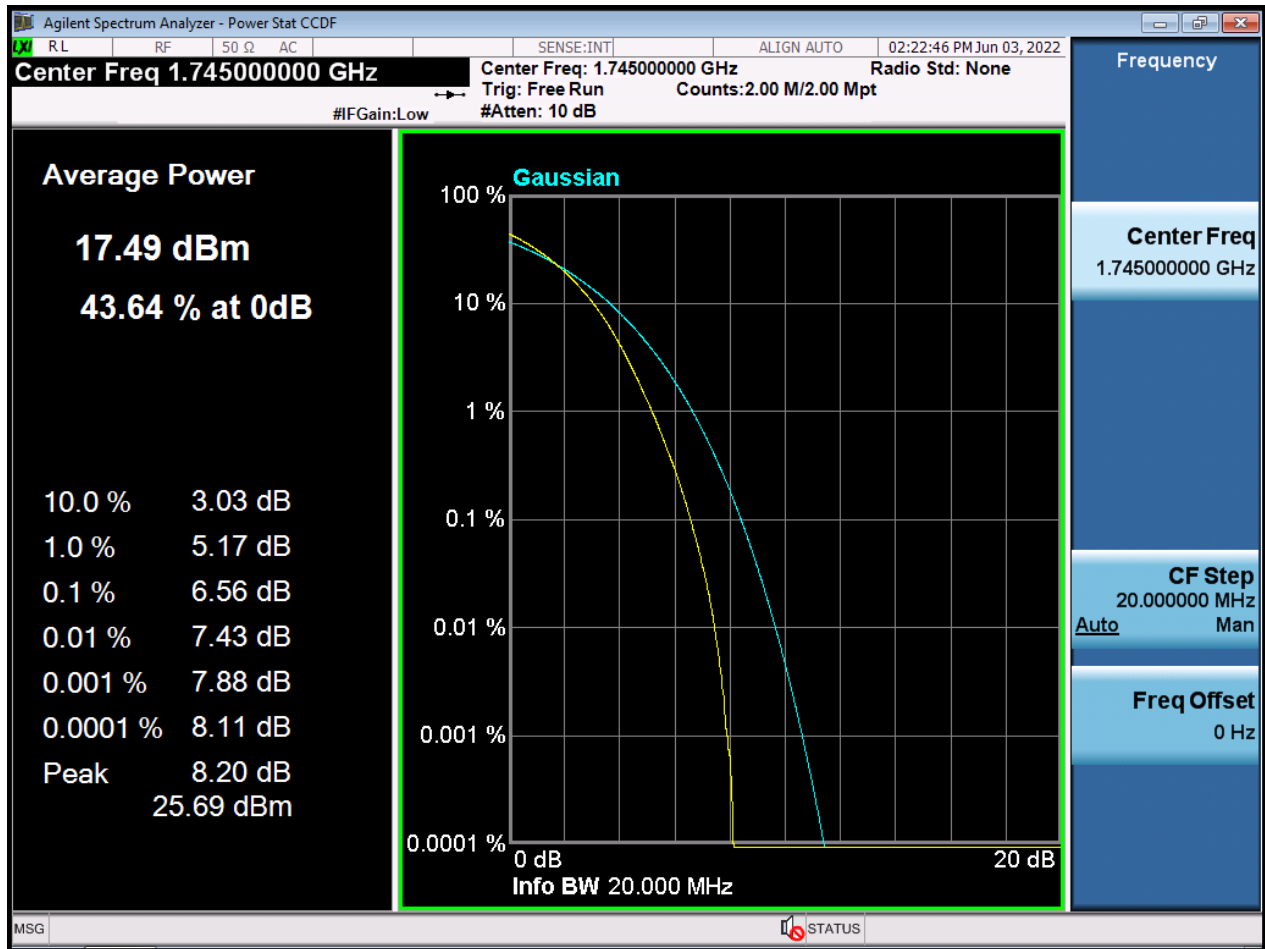


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

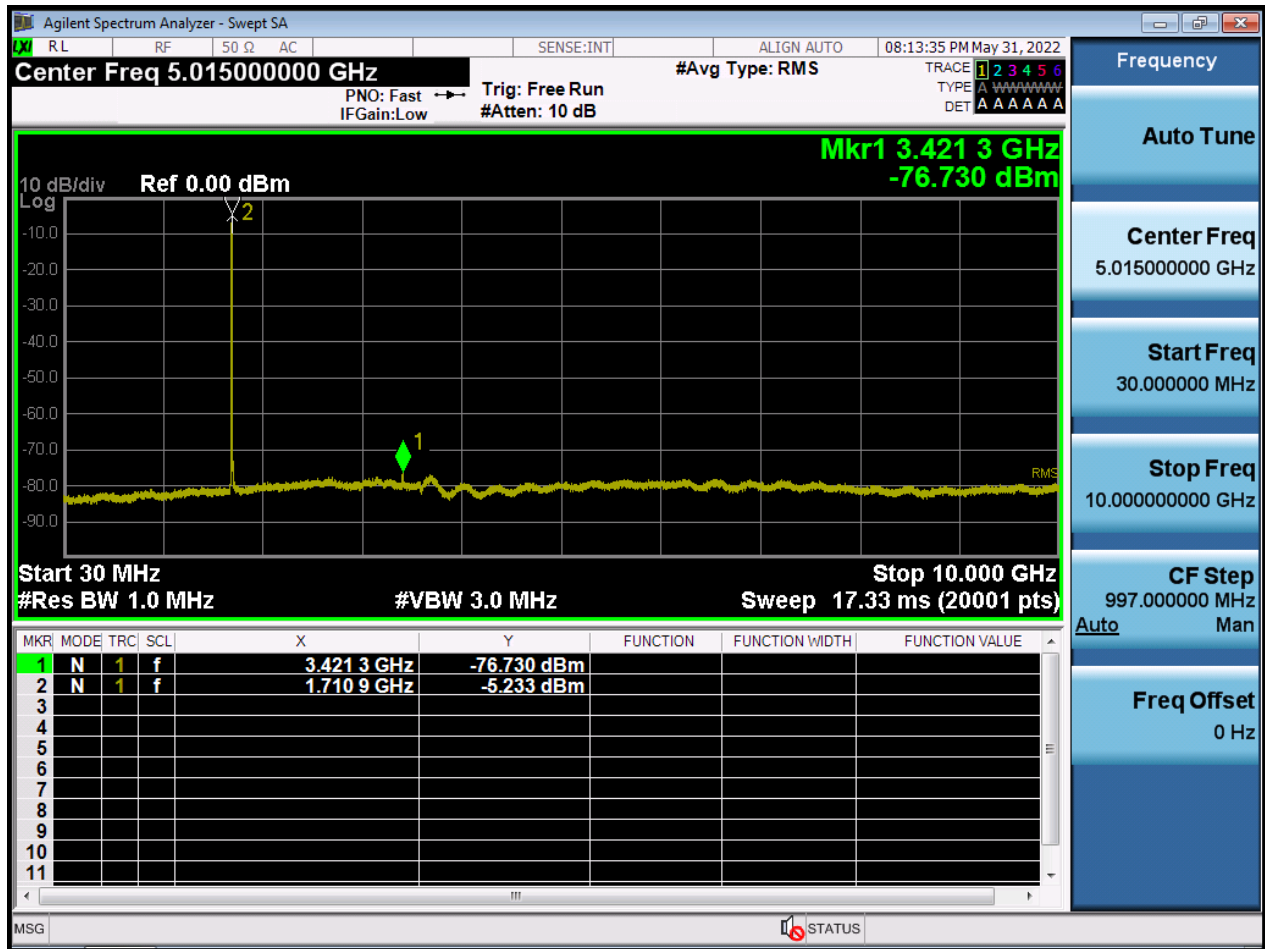


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

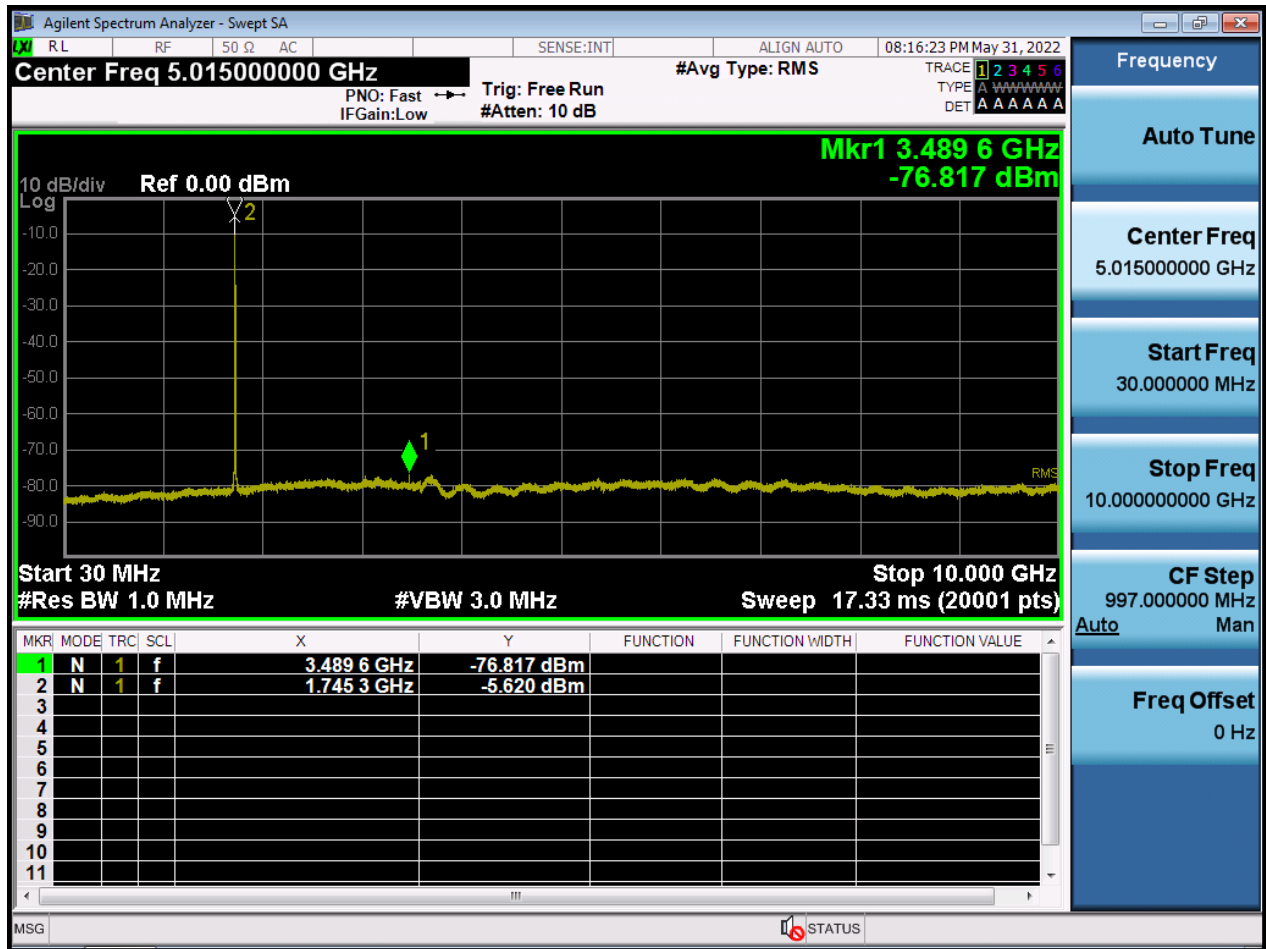


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

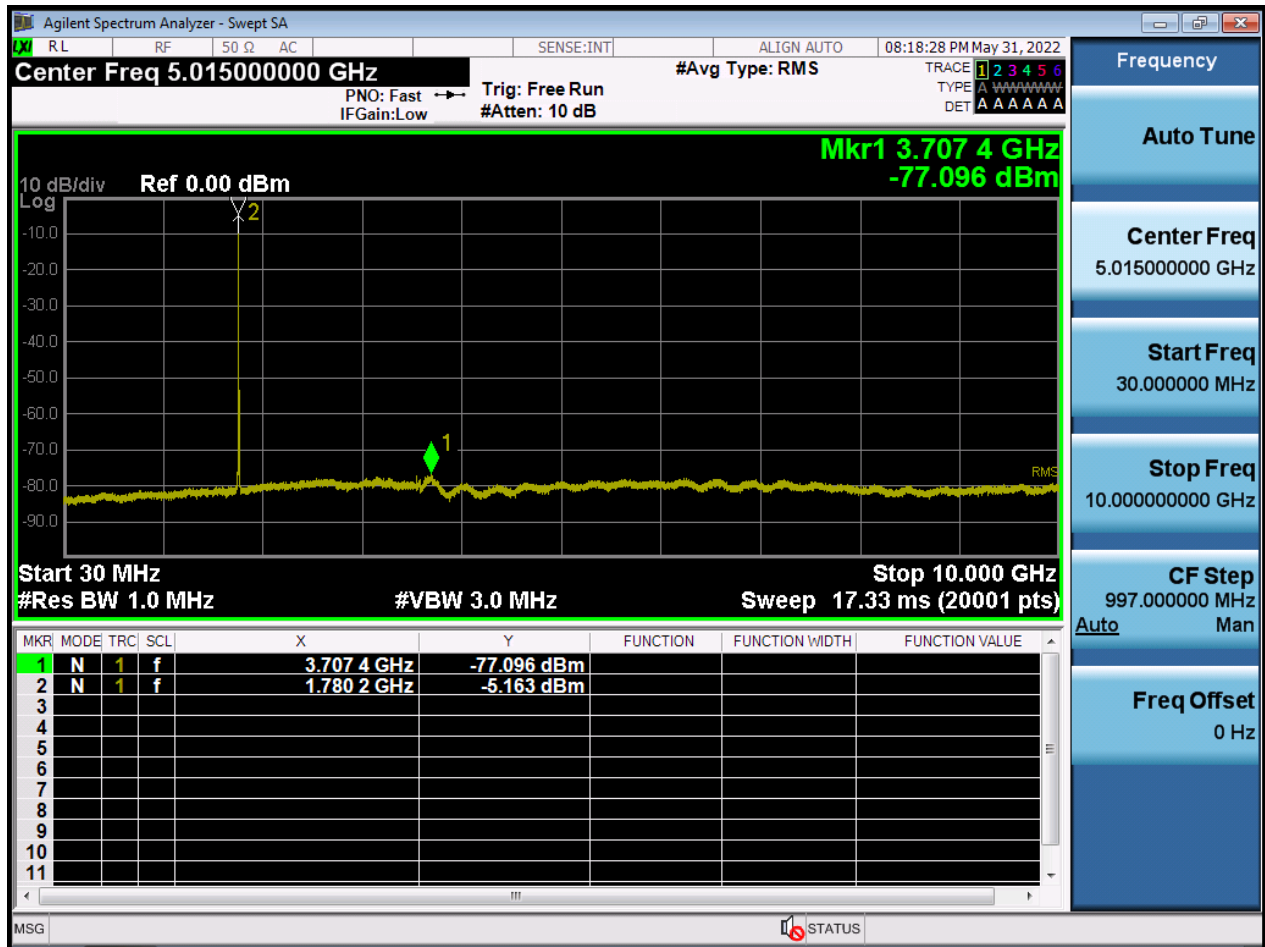


BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

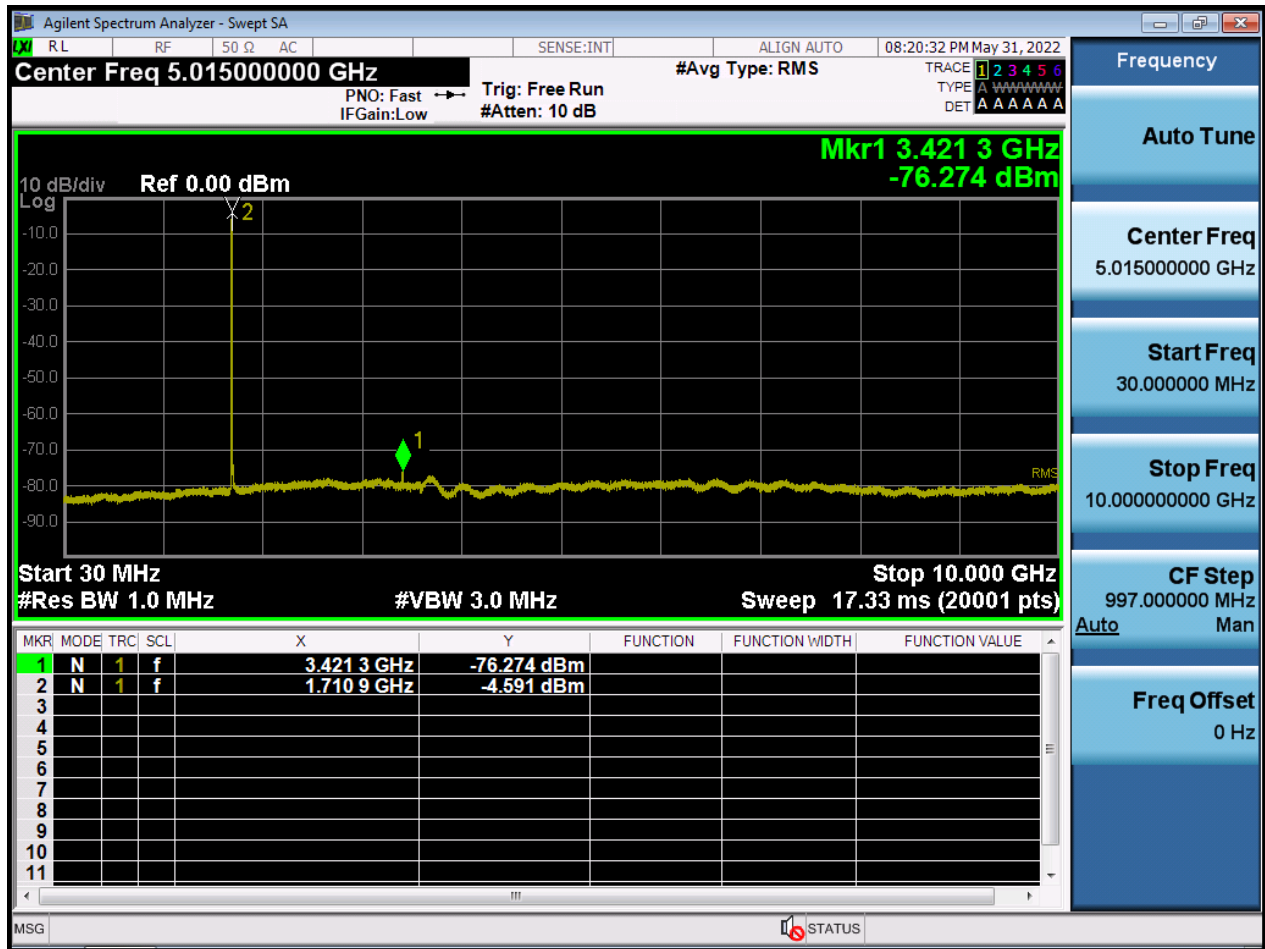


BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

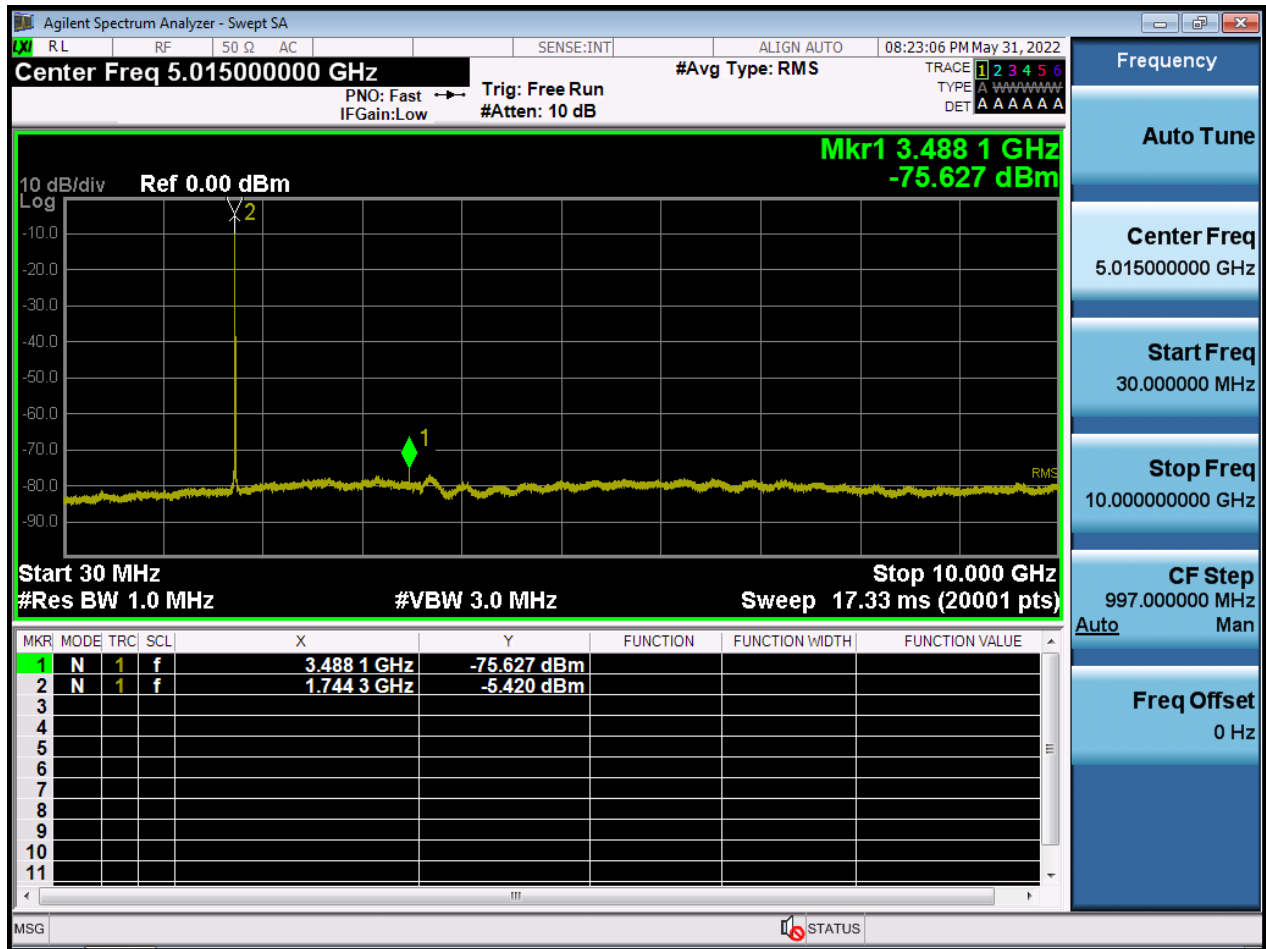


BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

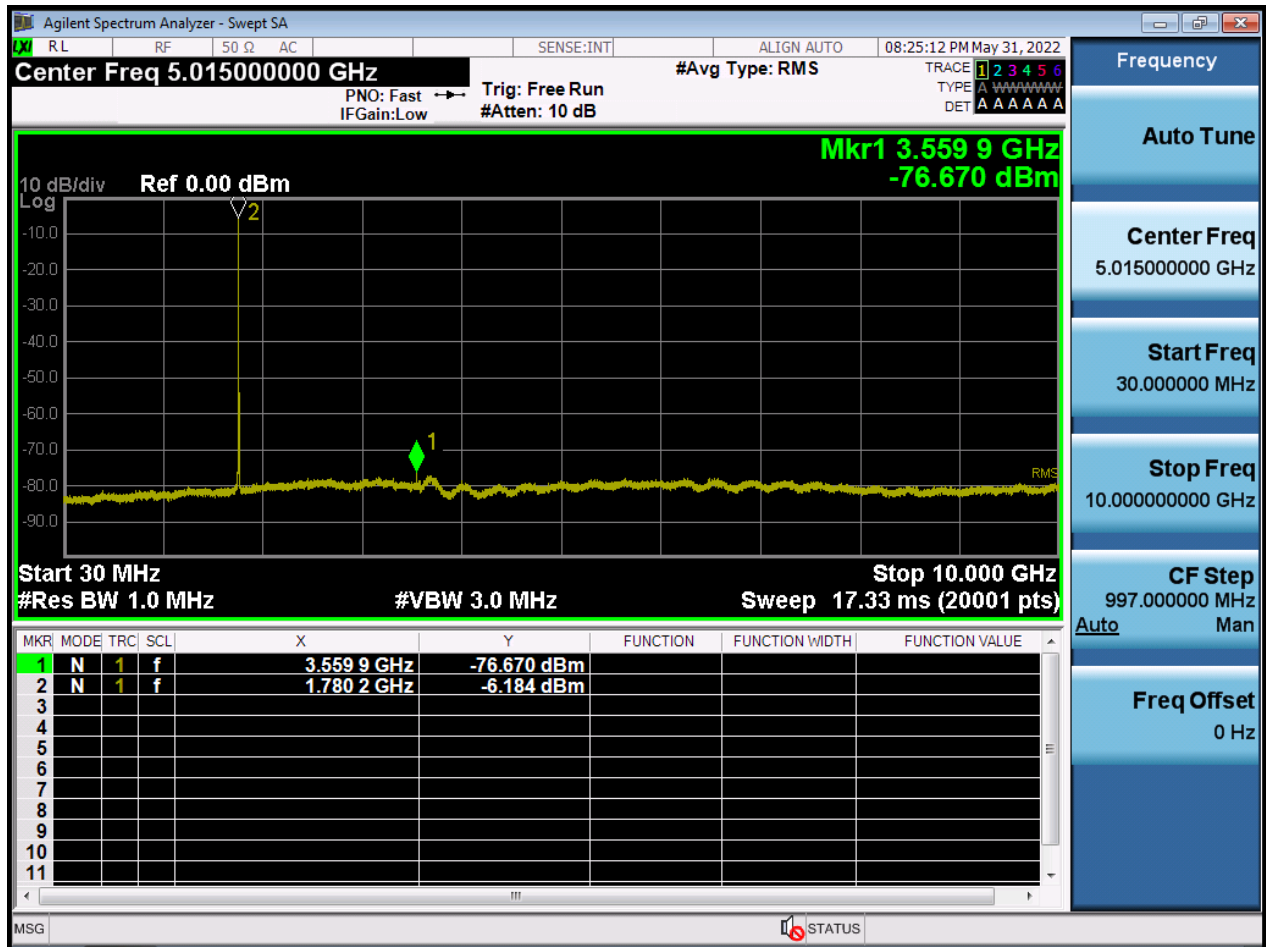

BW5 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

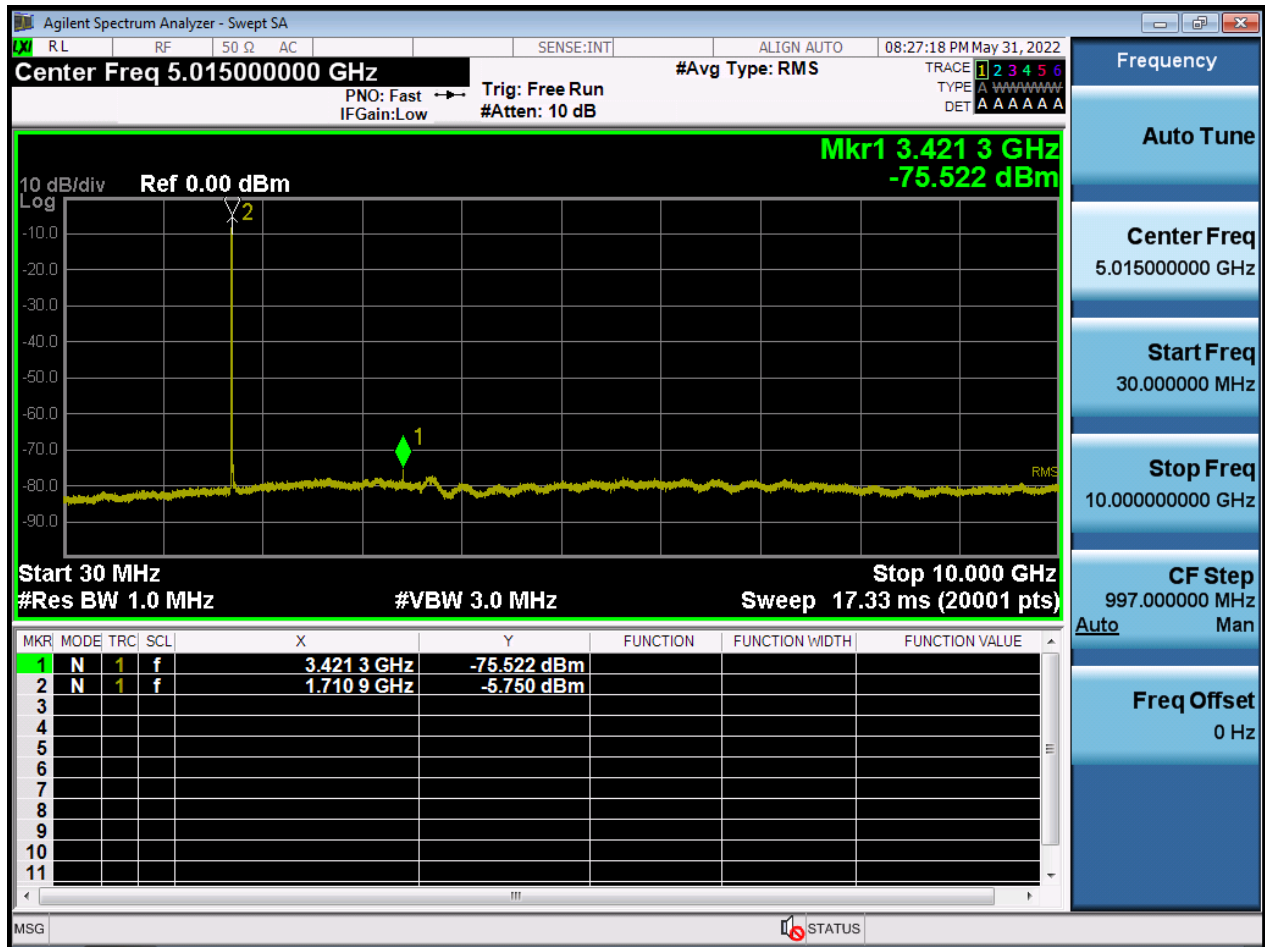

BW5 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

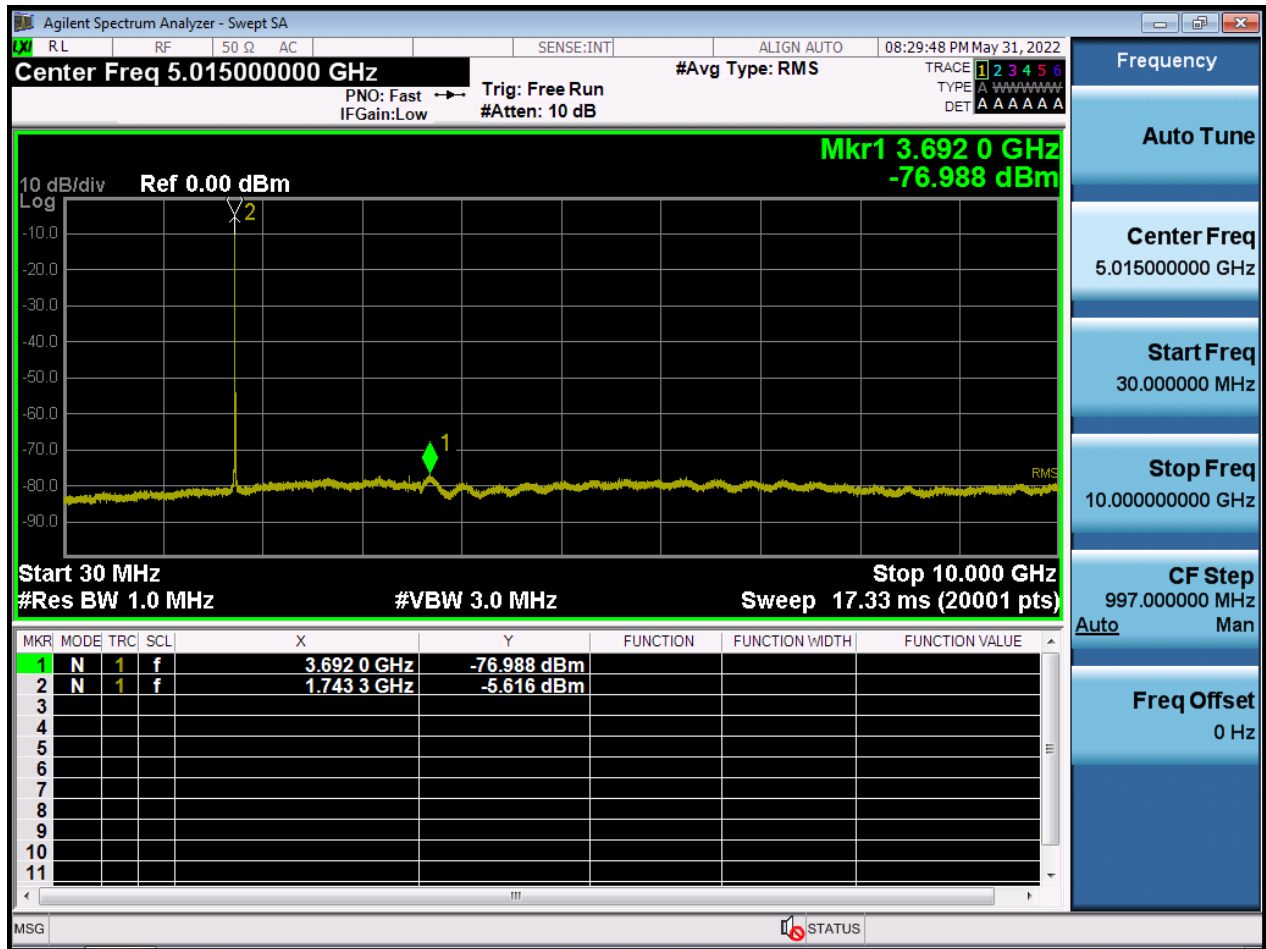

BW5 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

