

## Appendix H. – Power reduction verification

Per the May 2017 TCBC Workshop notes, demonstration of proper functioning of the power reduction mechanism is required to support the corresponding SAR Configurations.

The verification process was divided into two parts:

- 1). Evaluation of output power levels for individual triggering mechanism
- 2) Evaluation of the triggering distances for proximity-based sensors.

### 1. Power Reduction Verification for Main Bands

The Hotspot power reduction applied to this product has a higher priority than the proximity sensor, so these two conditions do not work simultaneously. and In both cases, powers were reduced to the same Power level.

All Hotspot SAR evaluations for this device were performed at the maximum allowed output Power when Hotspot is activated. FCC KDB Publication 616217D04v01r02 section 6 was used as a guideline for selection SAR test distances for this device when being used in phablet use conditions.

For detailed measurement conducted power results, please refer to the Section .11

The Power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and output power was monitored. The Power measurements were conformed to be within expected tolerances for all states before and after a power reduction mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Step 1 and 2 were repeated for all individual power reduction mechanism and combinations thereof. For the combination cases, one mechanism was switched to a “triggered” state at a time; powers were conformed to be within tolerance after each additional mechanism was activated.

Mechanism(s)	Mode/Band	Conducted Power (dBm)		
		Un-triggered (Max Power)	Triggered (Reduced Power)	Triggered (Reduced Power)
Grip	GSM/GPRS 1900 1Tx	28.22	25.02	
Grip	GSM/GPRS 1900 2Tx	25.01	22.14	
Grip	GSM/GPRS 1900 3Tx	23.49	20.44	
Grip	GSM/GPRS 1900 4Tx	21.80	19.13	
Grip	WCDMA B2	22.12	18.17	
Grip	WCDMA B4	21.91	18.95	
Grip	LTE Band 2	21.91	17.72	
Grip	LTE Band 4	22.45	18.07	
Grip	LTE Band 41(PC3)	23.22	20.34	
Grip	LTE Band 41(PC2)	24.97	20.40	
Grip	LTE Band 66	22.75	18.62	
Grip	Sub 6 Band n66	22.41	19.37	
Hotspot On	GSM/GPRS 1900 1Tx	28.20	24.91	
Hotspot On	GSM/GPRS 1900 2Tx	25.02	22.07	
Hotspot On	GSM/GPRS 1900 3Tx	23.50	20.39	
Hotspot On	GSM/GPRS 1900 4Tx	21.79	19.05	
Hotspot On	WCDMA B2	22.11	18.08	
Hotspot On	WCDMA B4	21.91	18.89	
Hotspot On	LTE Band 2	21.92	17.84	
Hotspot On	LTE Band 4	22.44	18.22	
Hotspot On	LTE Band 41(PC3)	23.23	20.23	
Hotspot On	LTE Band 41(PC2)	24.96	20.31	
Hotspot On	LTE Band 66	22.75	18.64	
Hotspot On	Sub 6 Band n66	22.40	19.36	
Hotspot On, Then Grip	GSM/GPRS 1900 1Tx	28.20	24.91	24.91
Hotspot On, Then Grip	GSM/GPRS 1900 2Tx	25.02	22.07	22.07
Hotspot On, Then Grip	GSM/GPRS 1900 3Tx	23.49	20.40	20.40
Hotspot On, Then Grip	GSM/GPRS 1900 4Tx	21.78	19.04	19.04
Hotspot On, Then Grip	WCDMA B2	22.11	18.09	18.09
Hotspot On, Then Grip	WCDMA B4	21.92	18.90	18.90
Hotspot On, Then Grip	LTE Band 2	21.91	17.85	17.85
Hotspot On, Then Grip	LTE Band 4	22.45	18.22	18.22
Hotspot On, Then Grip	LTE Band 41(PC3)	23.24	20.23	20.23
Hotspot On, Then Grip	LTE Band 41(PC2)	24.96	20.31	20.31
Hotspot On, Then Grip	LTE Band 66	22.75	18.64	18.64
Hotspot On, Then Grip	Sub 6 Band n66	22.42	19.37	19.37
Grip, then Hotspot On	GSM/GPRS 1900 1Tx	28.21	25.02	24.91
Grip, then Hotspot On	GSM/GPRS 1900 2Tx	25.01	22.14	22.07
Grip, then Hotspot On	GSM/GPRS 1900 3Tx	23.49	20.46	20.40
Grip, then Hotspot On	GSM/GPRS 1900 4Tx	21.79	19.13	19.04
Grip, then Hotspot On	WCDMA B2	22.11	18.15	18.09
Grip, then Hotspot On	WCDMA B4	21.92	18.95	18.90
Grip, then Hotspot On	LTE Band 2	21.92	17.72	17.85
Grip, then Hotspot On	LTE Band 4	22.45	18.07	18.22
Grip, then Hotspot On	LTE Band 41(PC3)	23.24	20.32	20.23
Grip, then Hotspot On	LTE Band 41(PC2)	24.97	20.41	20.31
Grip, then Hotspot On	LTE Band 66	22.76	18.61	18.64
Grip, then Hotspot On	Sub 6 Band n66	22.41	19.36	19.37

**1.1. Distance Verification Procedure**


Procedures for determining proximity sensor triggering distances

(KDB 616217D04v01r02§6.2)

The distance verification procedure was performed according to the following procedure:

1. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
2. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced,per KDB Publication 616217 D04v01r02 .Each applicable test position was evaluated. The distance were conformed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
3. Step 1 and 2 were repeated for the relevant modes, as appropriate
4. Steps1 through 3 were repeated for all distance-based power reduction mechanisms.

For detailed measurement conducted power results, please refer to the Section .11

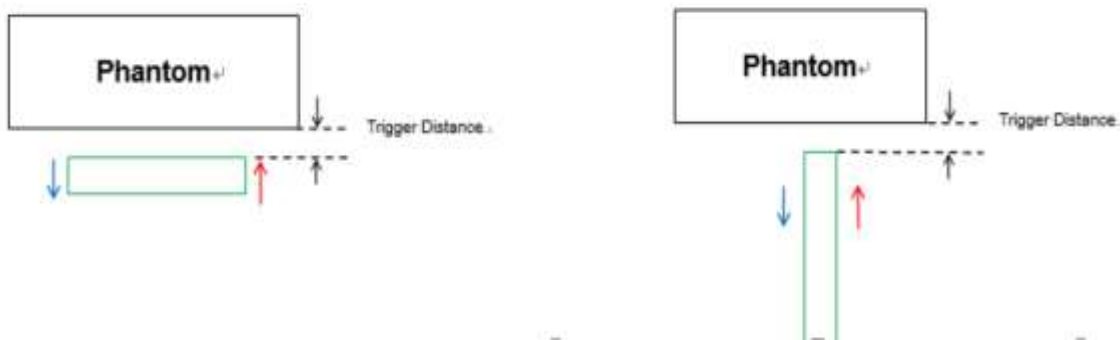

Proximity Sensor Trigger Distance Assessment KDB 616217 D04§6.2 (Rear / Front / Bottom side)

**LEGEND**

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Tissue simulating liquid	Trigger distance - Rear		Trigger distance - Front		Trigger distance - Bottom	
	Moving toward phantom [mm]	Moving away from phantom [mm]	Moving toward phantom [mm]	Moving away from phantom [mm]	Moving toward phantom [mm]	Moving away from phantom [mm]
1 800 MHz Tissue	9	10	7	8	14	15
1 900 MHz Tissue	9	10	7	8	14	15
2 600 MHz Tissue	9	10	7	8	14	15

**Distance Measurement verification for Proximity sensor**

Rear side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	14[mm]	13[mm]	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]	6[mm]	5[mm]
GSM1900 /GPRS 1Tx	28.20	28.21	28.19	28.20	28.18	24.99	25.00	25.00	25.01	24.99
GSM1900 /GPRS 2Tx	24.99	25.01	24.99	25.01	24.99	22.11	22.11	22.11	22.12	22.13
GSM1900 /GPRS 3Tx	23.49	23.49	23.47	23.48	23.47	20.44	20.42	20.41	20.41	20.41
GSM1900 /GPRS 4Tx	21.78	21.78	21.78	21.79	21.77	19.11	19.11	19.12	19.11	19.11
WCDMA B2	22.09	22.09	22.10	22.09	22.09	18.13	18.16	18.16	18.14	18.16
WCDMA B4	21.88	21.91	21.88	21.89	21.88	18.94	18.94	18.92	18.93	18.94
LTE Band 2	21.89	21.87	21.90	21.90	21.90	17.72	17.71	17.70	17.68	17.72
LTE Band 4	22.42	22.42	22.41	22.43	22.41	18.06	18.04	18.05	18.07	18.06
LTE Band 41(Class 3)	23.21	23.20	23.22	23.19	23.20	20.33	20.32	20.31	20.31	20.33
LTE Band 41(Class 2)	24.93	24.94	24.97	24.95	24.95	20.40	20.39	20.38	20.37	20.37
LTE Band 66	22.73	22.74	22.73	22.74	22.72	18.58	18.60	18.59	18.59	18.58
Sub 6 Band n66	22.39	22.40	22.37	22.40	22.39	19.36	19.37	19.37	19.34	19.35

Rear side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	6[mm]	7[mm]	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]	14[mm]	15[mm]
GSM1900 /GPRS 1Tx	24.99	25.00	25.01	24.99	25.00	28.18	28.18	28.18	28.18	28.21
GSM1900 /GPRS 2Tx	22.10	22.10	22.13	22.14	22.10	25.01	24.99	24.99	24.99	24.99
GSM1900 /GPRS 3Tx	20.44	20.43	20.42	20.43	20.44	23.49	23.45	23.46	23.49	23.46
GSM1900 /GPRS 4Tx	19.11	19.12	19.09	19.09	19.13	21.77	21.80	21.77	21.80	21.77
WCDMA B2	18.15	18.15	18.15	18.16	18.15	22.12	22.09	22.10	22.09	22.10
WCDMA B4	18.92	18.92	18.94	18.95	18.94	21.89	21.88	21.88	21.89	21.91
LTE Band 2	17.70	17.70	17.68	17.71	17.71	21.89	21.88	21.90	21.88	21.90
LTE Band 4	18.04	18.04	18.04	18.06	18.05	22.43	22.44	22.43	22.43	22.41
LTE Band 41(Class 3)	20.34	20.33	20.31	20.32	20.32	23.22	23.18	23.20	23.21	23.18
LTE Band 41(Class 2)	20.38	20.37	20.37	20.38	20.40	24.94	24.93	24.96	24.95	24.94
LTE Band 66	18.61	18.60	18.61	18.59	18.58	22.73	22.74	22.72	22.71	22.72
Sub 6 Band n66	19.37	19.36	19.35	19.34	19.37	22.37	22.40	22.37	22.38	22.40

Based on the most conservative measured triggering distance of 9mm, additional Phablet SAR measurements were required at 8mm from rear side for the above modes

Front side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]	6[mm]	5[mm]	4[mm]	3[mm]
GSM1900 /GPRS 1Tx	28.19	28.19	28.18	28.19	28.22	24.98	24.99	25.00	25.01	24.98
GSM1900 /GPRS 2Tx	25.01	24.98	25.01	25.01	24.98	22.12	22.13	22.10	22.11	22.12
GSM1900 /GPRS 3Tx	23.46	23.48	23.48	23.48	23.47	20.43	20.43	20.43	20.43	20.44
GSM1900 /GPRS 4Tx	21.78	21.76	21.78	21.80	21.77	19.13	19.11	19.09	19.09	19.13
WCDMA B2	22.10	22.10	22.09	22.12	22.10	18.15	18.14	18.13	18.15	18.15
WCDMA B4	21.91	21.89	21.89	21.88	21.90	18.94	18.93	18.94	18.95	18.92
LTE Band 2	21.90	21.90	21.88	21.91	21.91	17.68	17.72	17.70	17.70	17.68
LTE Band 4	22.42	22.44	22.44	22.41	22.43	18.06	18.07	18.05	18.07	18.05
LTE Band 41(Class 3)	23.21	23.19	23.18	23.22	23.18	20.30	20.34	20.31	20.30	20.30
LTE Band 41(Class 2)	24.93	24.96	24.93	24.93	24.96	20.40	20.37	20.38	20.37	20.40
LTE Band 66	22.72	22.74	22.73	22.71	22.73	18.60	18.62	18.59	18.60	18.60
Sub 6 Band n66	22.40	22.39	22.40	22.37	22.39	19.36	19.33	19.36	19.36	19.34

Front side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	4[mm]	5[mm]	6[mm]	7[mm]	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]
GSM1900 /GPRS 1Tx	25.00	24.98	25.01	25.01	25.01	28.21	28.18	28.21	28.21	28.19
GSM1900 /GPRS 2Tx	22.12	22.12	22.12	22.13	22.10	24.99	24.98	24.99	24.98	24.98
GSM1900 /GPRS 3Tx	20.41	20.41	20.43	20.43	20.42	23.46	23.46	23.47	23.46	23.46
GSM1900 /GPRS 4Tx	19.12	19.11	19.12	19.10	19.10	21.77	21.80	21.79	21.79	21.76
WCDMA B2	18.17	18.15	18.14	18.14	18.14	22.09	22.12	22.12	22.11	22.10
WCDMA B4	18.95	18.94	18.92	18.94	18.92	21.90	21.91	21.90	21.89	21.87
LTE Band 2	17.70	17.70	17.68	17.69	17.68	21.91	21.89	21.89	21.90	21.91
LTE Band 4	18.07	18.06	18.06	18.06	18.07	22.42	22.42	22.41	22.45	22.42
LTE Band 41(Class 3)	20.33	20.33	20.33	20.33	20.30	23.21	23.21	23.22	23.22	23.19
LTE Band 41(Class 2)	20.39	20.39	20.38	20.39	20.37	24.94	24.97	24.95	24.96	24.93
LTE Band 66	18.61	18.58	18.60	18.61	18.61	22.73	22.72	22.75	22.71	22.74
Sub 6 Band n2	19.33	19.36	19.34	19.34	19.35	22.40	22.38	22.37	22.37	22.39
Sub 6 Band n66	25.00	25.02	25.00	25.02	25.01	28.21	28.19	28.18	28.21	28.19

Based on the most conservative measured triggering distance of 7mm, additional Phablet SAR measurements were required at 6mm from Front side for the above modes

Bottom side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	19[mm]	18[mm]	17[mm]	16[mm]	15[mm]	14[mm]	13[mm]	12[mm]	11[mm]	10[mm]
GSM1900 /GPRS 1Tx	28.19	28.19	28.19	28.22	28.20	25.01	24.99	24.99	25.00	24.99
GSM1900 /GPRS 2Tx	25.01	24.98	24.99	24.99	25.01	22.11	22.12	22.13	22.14	22.13
GSM1900 /GPRS 3Tx	23.49	23.48	23.45	23.46	23.45	20.43	20.44	20.43	20.44	20.44
GSM1900 /GPRS 4Tx	21.80	21.78	21.76	21.76	21.78	19.10	19.10	19.10	19.10	19.12
WCDMA B2	22.09	22.10	22.09	22.10	22.09	18.15	18.17	18.15	18.16	18.14
WCDMA B4	21.91	21.89	21.89	21.90	21.89	18.94	18.92	18.95	18.93	18.93
LTE Band 2	21.90	21.90	21.89	21.88	21.90	17.70	17.71	17.70	17.69	17.68
LTE Band 4	22.42	22.44	22.43	22.43	22.41	18.03	18.06	18.07	18.04	18.05
LTE Band 41(Class 3)	23.21	23.21	23.21	23.19	23.20	20.33	20.34	20.32	20.33	20.30
LTE Band 41(Class 2)	24.94	24.96	24.95	24.93	24.95	20.37	20.37	20.39	20.40	20.37
LTE Band 66	22.71	22.72	22.72	22.75	22.75	18.61	18.60	18.60	18.61	18.58
Sub 6 Band n66	22.37	22.37	22.37	22.37	22.39	19.36	19.34	19.34	19.34	19.34

Bottom side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)										
	11[mm]	12[mm]	13[mm]	14[mm]	15[mm]	16[mm]	17[mm]	18[mm]	19[mm]	20[mm]	
GSM1900 /GPRS 1Tx	24.98	24.99	25.02	24.99	25.00	28.20	28.18	28.18	28.20	28.20	
GSM1900 /GPRS 2Tx	22.13	22.13	22.13	22.12	22.10	24.98	24.99	25.01	24.99	25.01	
GSM1900 /GPRS 3Tx	20.42	20.42	20.42	20.42	20.41	23.47	23.48	23.48	23.48	23.48	
GSM1900 /GPRS 4Tx	19.10	19.10	19.09	19.10	19.12	21.80	21.79	21.77	21.79	21.78	
WCDMA B2	18.14	18.15	18.13	18.15	18.14	22.11	22.11	22.11	22.11	22.10	
WCDMA B4	18.95	18.92	18.92	18.91	18.92	21.89	21.89	21.91	21.88	21.88	
LTE Band 2	17.69	17.68	17.70	17.69	17.69	21.88	21.89	21.91	21.88	21.90	
LTE Band 4	18.04	18.04	18.04	18.03	18.04	22.44	22.42	22.43	22.41	22.43	
LTE Band 41(Class 3)	20.32	20.33	20.33	20.33	20.32	23.22	23.20	23.20	23.21	23.18	
LTE Band 41(Class 2)	20.39	20.37	20.39	20.38	20.38	24.97	24.94	24.94	24.94	24.94	
LTE Band 66	18.59	18.60	18.62	18.58	18.59	22.72	22.75	22.74	22.71	22.74	
Sub 6 Band n66	19.34	19.35	19.34	19.35	19.37	22.38	22.40	22.39	22.39	22.40	

Based on the most conservative measured triggering distance of 14mm, additional Phablet SAR measurements were required at 13mm from Bottom side for the above modes

## 1.2 Proximity Sensor Coverage for SAR measurements


(KDB 616217 D04v01r02§6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

## 1.3 Proximity Sensor Tilt Angle Assessment

(KDB 616217 D04v01r02 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band. The EUT was rotated about Bottom side for angles up to  $\pm 45^\circ$ . If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to  $\pm 45^\circ$ .

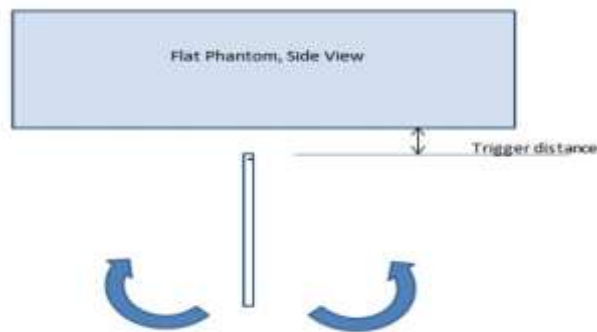

Proximity sensor tilt angle assessment (Bottom side) KDB 616217 §6.4

### Summary of Tablet Tilt Angle influence to Proximity Sensor Triggering (Bottom side)

Tissue	Minimum distance at which power reduction was maintained over-45°	Power reduction status											
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
1800 MHz Tissue	14mm	On	On	On	On	On	On	On	On	On	On	On	On
1900 MHz Tissue	14 mm	On	On	On	On	On	On	On	On	On	On	On	On
2600 MHz Tissue	14 mm	On	On	On	On	On	On	On	On	On	On	On	On

**1.5 Resulting test positions for Phablet SAR measurements**

Wireless technologies	Position	§6.2 Triggering Distance [mm]	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for Phablet SAR [mm]
WWAN (GSM1900 /WCDMA B2/B4 /LTEB2/B4/B41(Class3) /B41(Class2)/B66 /SUB6 n66 )	Rear	9	N/A	N/A	8
	Front	7	N/A	N/A	6
	Bottom	14	N/A	N/A	13

Note:FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions



## 2. Power reduction Verification for WLAN Ant

This device uses a power reduction mechanism for SAR compliance for WLAN operations during voice or VoIP held to ear scenarios.

When a user makes or receives a WLAN voice or WLAN VOIP call for WLAN Ant the audio of the call is sent through the Receiver at the top of the device will trigger the Power reduction for WLAN Ant (i.e. reducing output power for Head SAR compliance)

Detailed descriptions of the power reduction mechanism are included in the Main operational description document

### Power Measurement Verification for WLAN

Condition For Power reduction	Wireless Technologies	Conducted Power[dBm]			
		Un-Triggered (Max Power)		Triggered (Reduced Power)	
		Ant1	Ant2	Ant1	Ant2
RCV-on	2.4GHz 802.11b (Exclude 12/13ch)	18.20	17.66	13.70	12.76
RCV-on	2.4GHz 802.11g (Exclude 12/13ch))	15.42	15.46	13.42	12.89
RCV-on	2.4GHz 802.11n (Exclude 12/13ch)	14.30	14.40	13.22	12.77
RCV-on	5GHz 802.11a	16.20	16.30	12.21	11.59
RCV-on	5GHz 802.11n 20MHz	16.30	16.40	12.17	11.54
RCV-on	5GHz 802.11n 40MHz (Exclude 38/62/102ch)	14.40	14.89	12.12	11.56
RCV-on	5GHz 802.11ac 20MHz	16.11	16.12	12.06	11.57
RCV-on	5GHz 802.11ac 40MHz (Exclude 38/62/102ch)	15.31	14.37	12.04	11.52
RCV-on	5GHz 802.11ac 80MHz (Exclude 122ch)	14.12	13.23	12.05	11.49

# **Appendix I. – Down-link CA Power Measurement / 5G NR Call Box Setup**

## 1. LTE Down-link Carrier Aggregation Conducted Powers

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by test product implementation. For those configurations required by April 2018 TCBC Workshop notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only.

### Downlink Carrier aggregation:


1. This device only supports downlink carrier aggregation. For every supported combination of downlink carrier aggregation, power measurements were performed with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.
2. All control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
3. Per FCC KDB publication 941225 D05A v01r02, Section C)3)b)ii), PCC uplink channel was selected at downlink carrier aggregation combinations. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
4. For continuous intra-band carrier aggregation, the downlink channel spacing between the component carriers was set to multiple of 300kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521.
5. For non-continuous intra-band carrier aggregation, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
6. All selected downlink channels remained fully within the downlink transmission band of the respective component carrier.




Power Measurement setup

### LTE Down Link 2CA Call Setup

#### PCC Setting : Channel/ RB/ BW/ Modulation

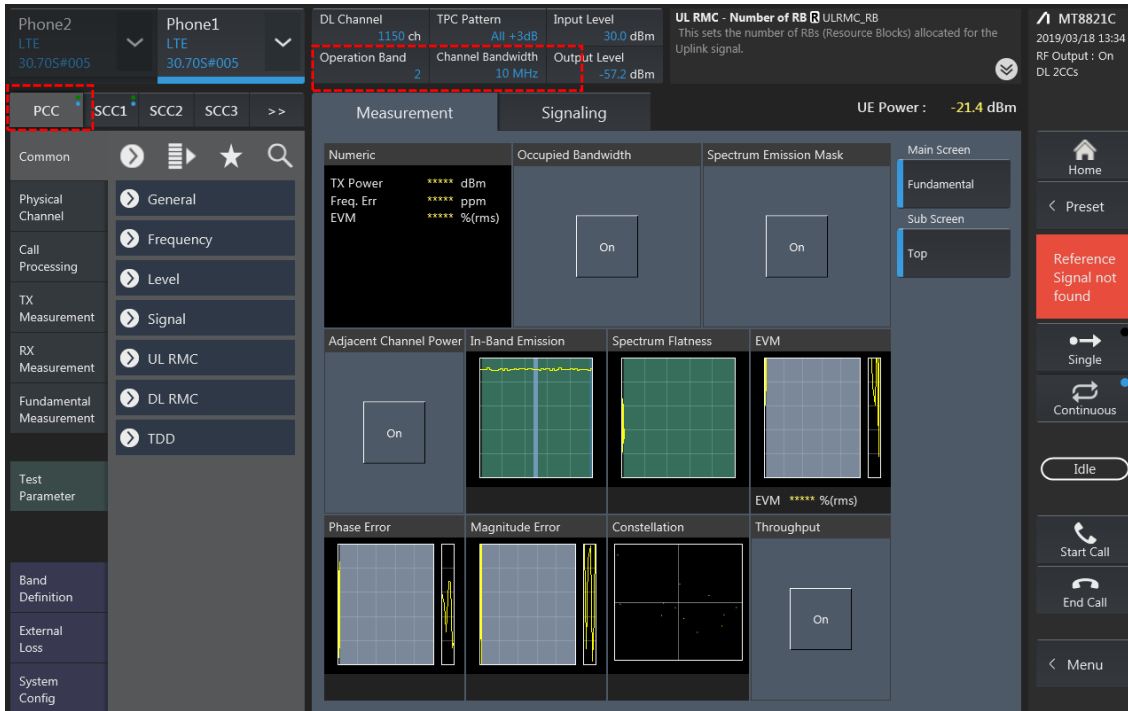

#### SCC Setting : Channel/ RB/ BW/ Modulation and call Connection

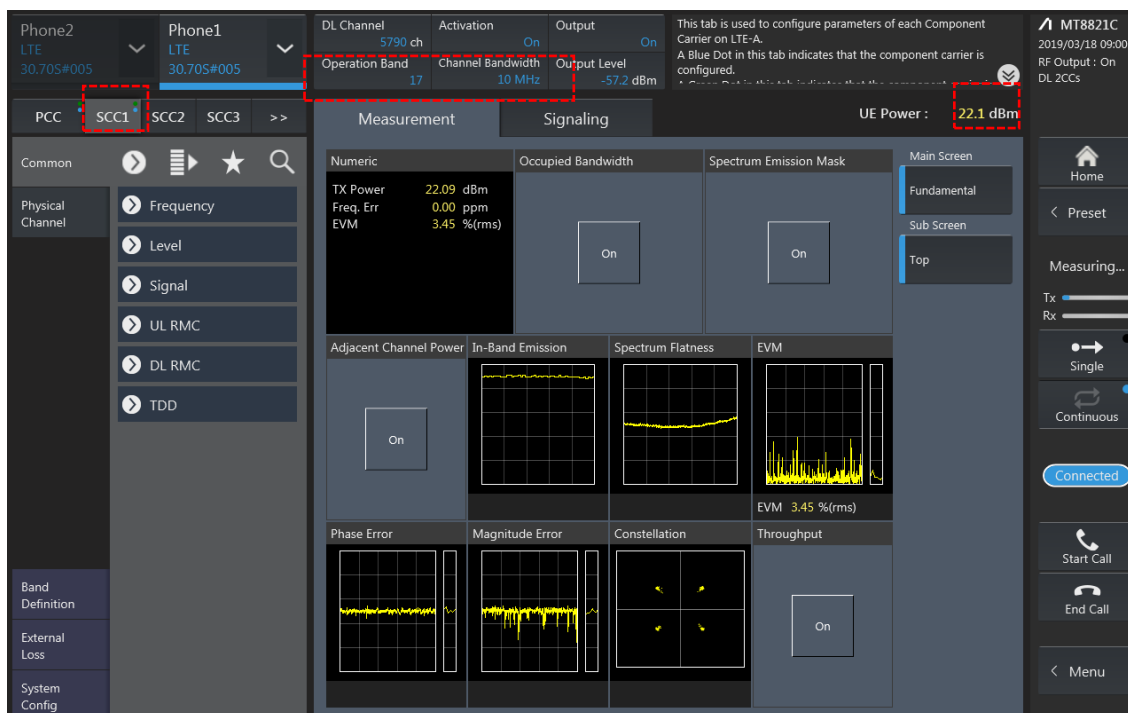


## 2CA Downlink Carrier aggregation Maximum conducted Powers


Combination	PCC									SCC				Tx Power		Deviation
	Band	BW	PCC UL Channel	PCC UL Frequency	PCC DL Channel	PCC DL Frequency	Modulation	RB	offset	Band	BW	SCC DL Channel	SCC DL Frequency	LTE Single Carrier Tx Power (dBm)	LTE Tx Power with DL CA Enabled (dBm)	
2A-2A	2	15	18900	1880	900	1960	QPSK	1	36	2	20	1100	1980	22.15	22.11	-0.04
2C	2	15	18900	1880	900	1960	QPSK	1	36	2	20	1071	1977.1	22.15	22.09	-0.06
2A-12A(0,1)	2	15	18900	1880	900	1960	QPSK	1	36	12	10	5095	737.5	22.15	22.04	-0.11
2A-12A(2)	2	10	18900	1880	900	1960	QPSK	1	24	12	10	5095	737.5	22.12	22.14	0.02
2A-12A(0,1)	12	10	23095	707.5	5095	737.5	QPSK	1	0	2	20	900	1960	24.08	24.04	-0.04
2A-12A(2)	12	10	23095	707.5	5095	737.5	QPSK	1	0	2	10	900	1960	24.08	24.15	0.07
2A-17A	2	10	18900	1880	900	1960	QPSK	1	24	17	10	5790	740	22.12	22.09	-0.03
2A-17A	17	10	23790	710	5790	740	QPSK	1	0	2	10	900	1960	24.13	24.11	-0.02
2A-66A(0,2)	2	15	18900	1880	900	1960	QPSK	1	36	66	20	66786	2145	22.15	22.04	-0.11
2A-66A(1)	2	10	18900	1880	900	1960	QPSK	1	24	66	10	66786	2145	22.12	22.09	-0.03
2A-66A(0,2)	66	5	132322	1745	66786	2145	QPSK	1	12	2	20	900	1960	22.99	22.89	-0.10
2A-66A(1)	66	5	132322	1745	66786	2145	QPSK	1	12	2	10	900	1960	22.99	22.91	-0.08
5A-41A	5	10	20525	836.5	2525	881.5	QPSK	1	0	41	20	40620	2593	24.19	24.07	-0.12
12A-66A(0,3)	12	10	23095	707.5	5095	737.5	QPSK	1	0	66	10	66786	2145	24.08	24.06	-0.02
12A-66A(1,2,4)	12	10	23095	707.5	5095	737.5	QPSK	1	0	66	20	66786	2145	24.08	24.05	-0.03
12A-66A(5)	12	5	23155	713.5	5155	743.5	QPSK	1	12	66	15	66786	2145	24.06	24.01	-0.05
2A-66A(0,1,2,3)	66	5	132322	1745	66786	2145	QPSK	1	12	12	10	5095	737.5	22.99	23.05	0.06
12A-66A(5)	66	5	132322	1745	66786	2145	QPSK	1	12	12	5	5095	737.5	22.99	23.01	0.02
26A-41A	26	10	26750	820	8750	865	QPSK	1	0	41	20	40620	2593	24.18	24.11	-0.07
41A-41A(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	41490	2680	23.33	23.27	-0.06
41A-41A(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	39750	2506	25.38	25.34	-0.04
66A-66A	66	5	132322	1745	66786	2145	QPSK	1	12	66	20	67236	2190	22.99	23.05	0.06
66B	66	5	132322	1745	66786	2145	QPSK	1	12	66	15	66879	2154.3	22.99	23.04	0.05
66C	66	5	132322	1745	66786	2145	QPSK	1	12	66	20	66903	2156.7	22.99	23.00	0.01

## LTE Down Link 3CA Call Setup


### 1) PCC Setting: Channel /RB/BW/Modulation

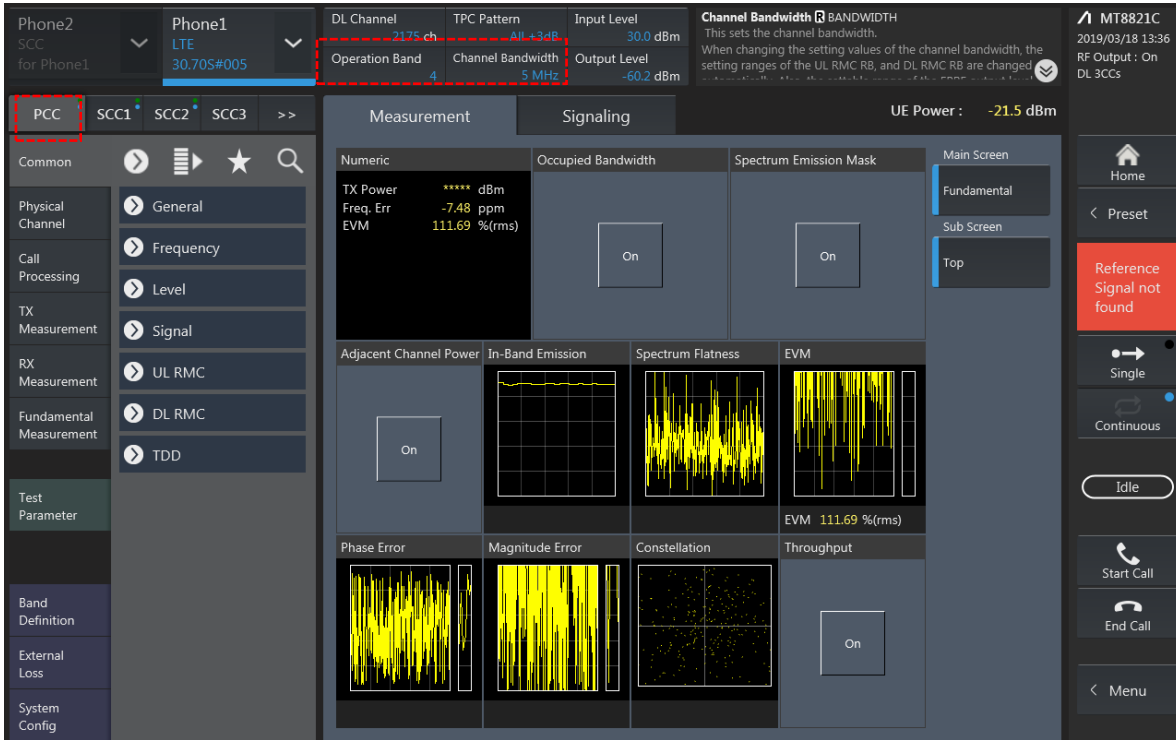

### 2) SCC1 Setting : Channel /RB/BW/Modulation

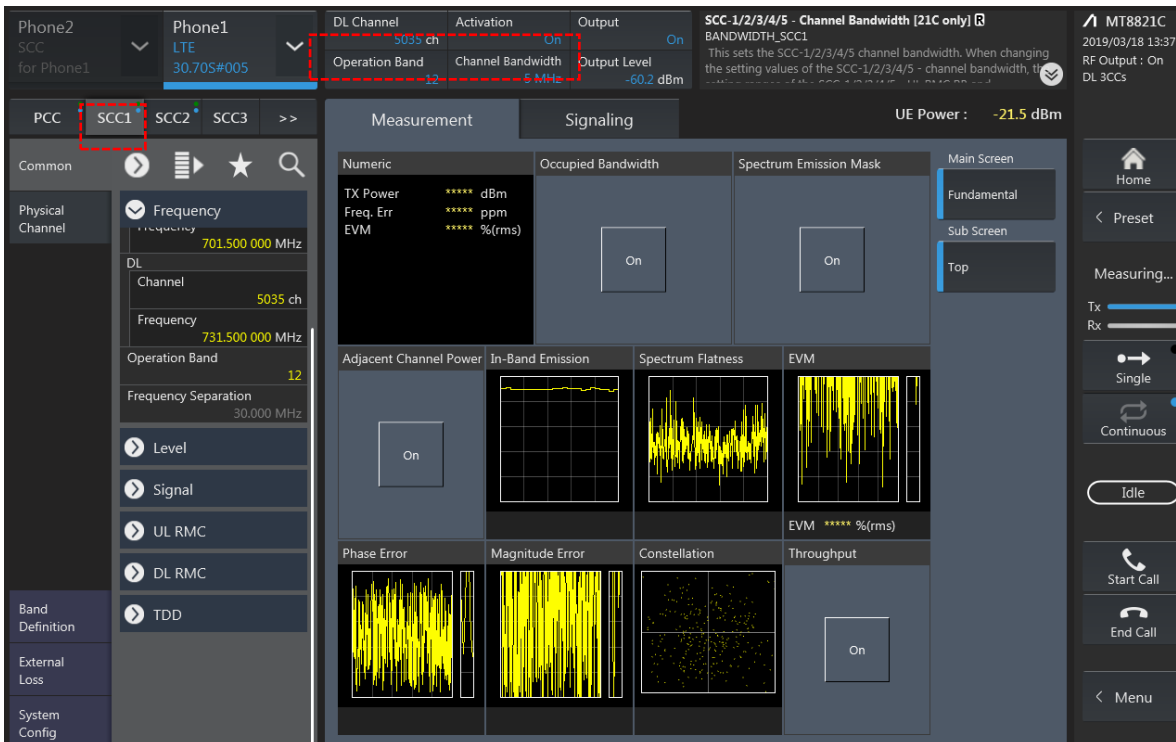

3) SCC2 Setting (Channel /RB/BW/Modulation )and call Connection

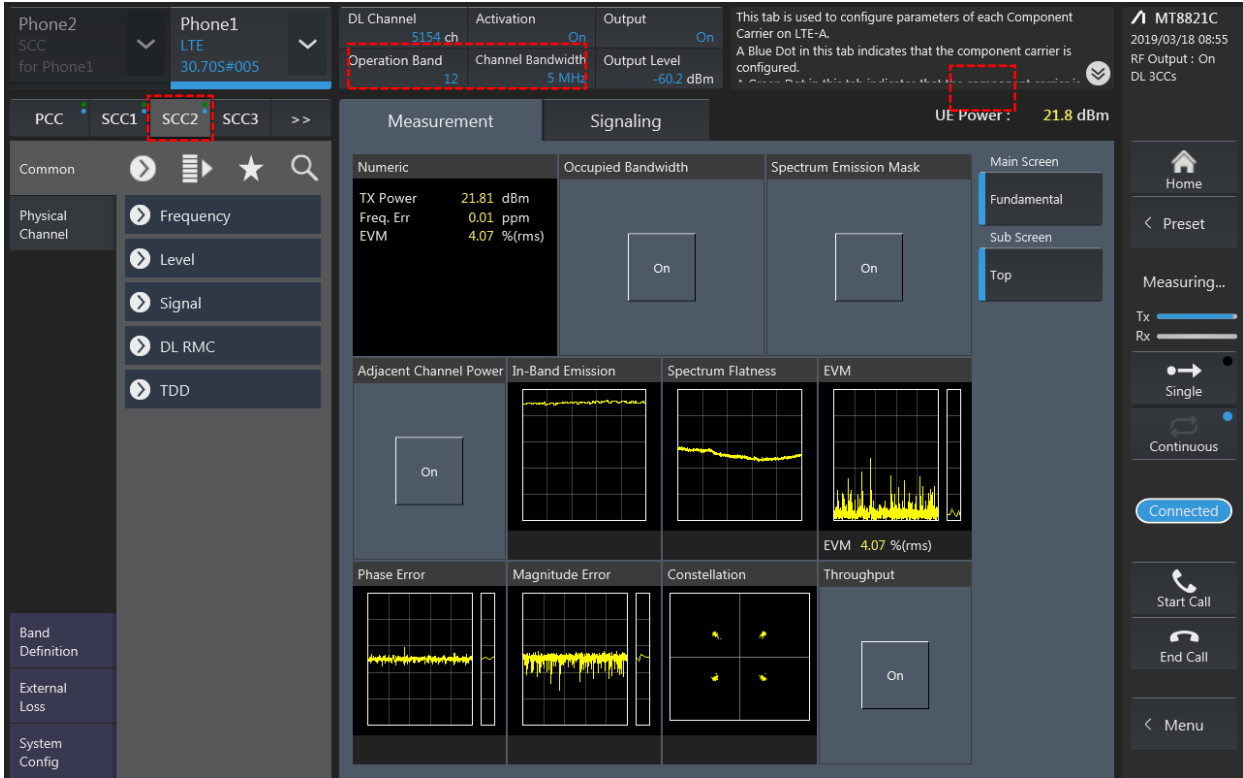


### 3CA Downlink Carrier aggregation Maximum conducted Powers

Combination	PCC									SCC				SCC				Tx Power		Deviation
	Band	BW	PCC UL Channel	PCC UL Frequency	PCC DL Channel	PCC DL Frequency	Modulation	RB	offset	Band	BW	SCC DL Channel	SCC DL Frequency	Band	BW	SCC DL Channel	SCC DL Frequency	LTE Single Carrier Tx Power (dBm)	LTE Tx Power with DL CA Enabled (dBm)	
2A-4A-5A	2	15	18900	1880	900	1960	QPSK	1	36	4	20	2175	2132.5	5	10	2525	881.5	22.15	22.04	-0.11
2A-4A-5A	4	15	20025	1717.5	2025	2117.5	QPSK	1	36	2	20	900	1960	5	10	2525	881.5	22.81	22.79	-0.02
2A-4A-5A	5	10	20525	836.5	2525	881.5	QPSK	1	0	2	20	900	1960	4	20	2175	2132.5	24.19	24.21	0.02
4A-4A-12A	4	15	20025	1717.5	2025	2117.5	QPSK	1	36	4	20	2300	2145	12	10	5095	737.5	22.81	22.8	-0.01
4A-4A-12A	12	10	23095	707.5	5095	737.5	QPSK	1	0	4	20	2175	2132.5	4	10	2350	2150	24.08	24.15	0.07
4A-4A-17A	4	15	20025	1717.5	2025	2117.5	QPSK	1	36	4	20	2300	2145	17	10	5790	740	22.81	22.77	-0.04
4A-4A-17A	17	10	23790	710	5790	740	QPSK	1	0	4	20	2175	2132.5	4	10	2350	2150	24.13	24.13	0.00
5A-66A-66A	5	10	20525	836.5	2525	881.5	QPSK	1	0	66	20	66786	2145	66	20	67236	2190	24.19	24.18	-0.01
5A-66A-66A	66	5	132322	1745	66786	2145	QPSK	1	12	66	20	67236	2190	5	10	2525	881.5	22.99	23.01	0.02
26A-41C	26	10	26750	820	8750	865	QPSK	1	0	41	20	40620	2593	41	20	40818	2612.8	24.18	24.15	-0.03
41A-41C(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	41292	2660.2	41	20	41490	2680	23.33	23.36	0.03
41A-41C(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	41490	2680	23.33	23.34	0.01
41A-41C(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	39750	2506	41	20	39948	2525.8	25.38	25.34	-0.04
41A-41C(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	39750	2506	25.38	25.31	-0.07
41D(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	40962	2627.2	23.33	23.24	-0.09
41D(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	41094	2640.4	25.38	25.31	-0.07




**LTE Down Link 4CA Call Setup**


PCC Setting: Channel /RB/BW/Modulation

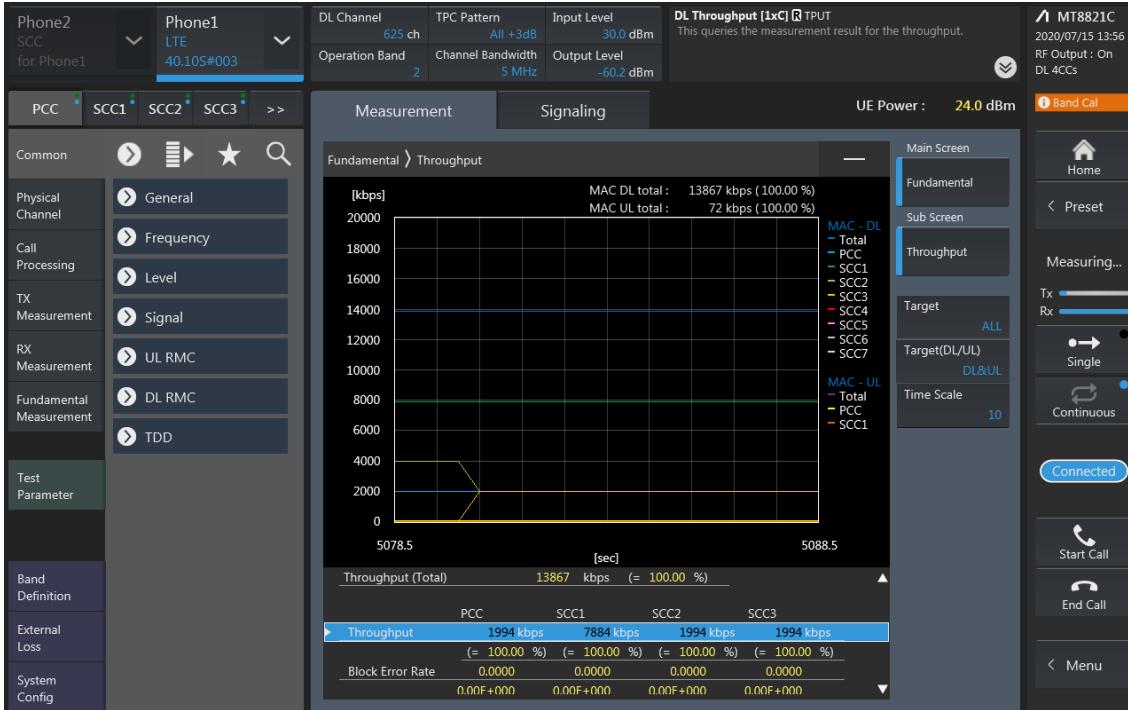


**SCC1 Setting (Channel /RB/BW/Modulation)and call Connection**

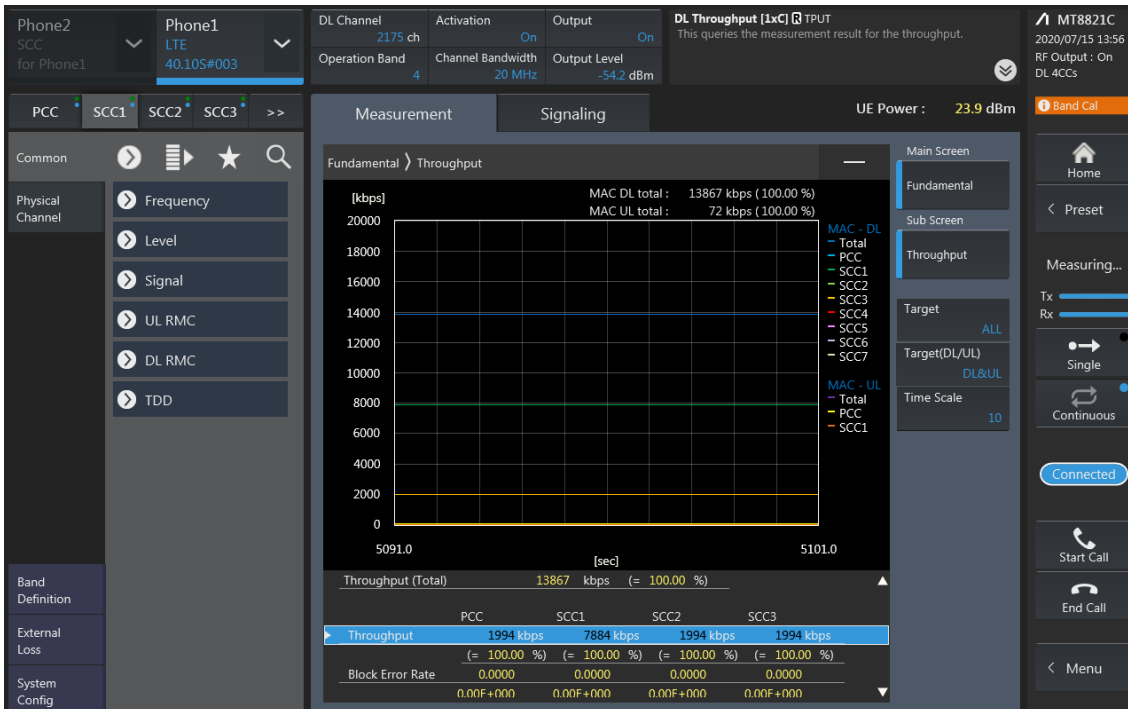

SCC2 Setting (Channel /RB/BW/Modulation )and call Connection

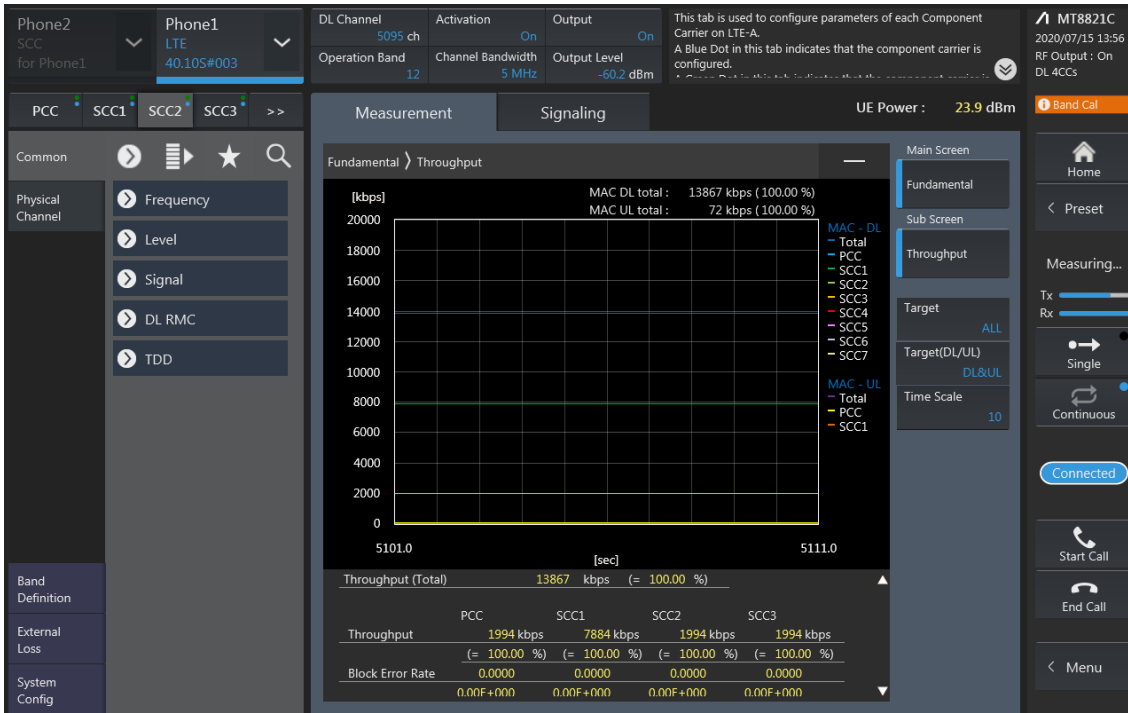

SCC3 Setting (Channel /RB/BW/Modulation )and call Connection

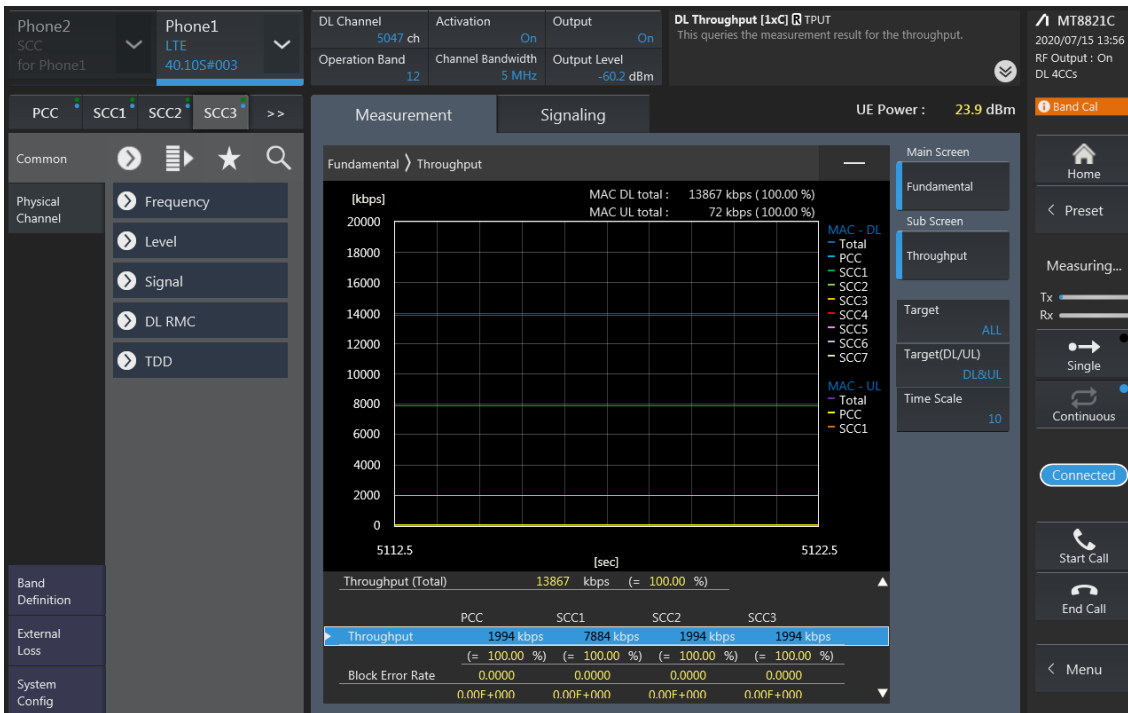


### 4CA Downlink Carrier aggregation Maximum conducted Powers


Combination	PCC									SCC				SCC				SCC		Tx Power		Deviation		
	Band	BW	PCC UL Channel	PCC UL Frequency	PCC DL Channel	PCC DL Frequency	Modulation	RB	offset	Band	BW	SCC DL Channel	SCC DL Frequency	Band	BW	SCC DL Channel	SCC DL Frequency	Band	BW	SCC DL Channel	SCC DL Frequency		LTE Single Carrier Tx Power (dBm)	LTE Tx Power with 4 CA Subbands (dBm)
41A-41D(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	41094	2640.4	41	20	41292	2660.2	41	20	41490	2680	23.33	23.34	0.01
41A-41D(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	40962	2627.2	41	20	41490	2680	23.33	23.29	-0.04
41A-41D(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	39750	2506	41	20	39948	2525.8	41	20	40146	2545.6	25.38	25.31	-0.07
41A-41D(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	41094	2640.4	41	20	39750	2506	25.38	25.36	-0.02
41C-41C(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	41292	2660.2	41	20	41490	2680	23.33	23.31	-0.02
41C-41C(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	39750	2506	41	20	39948	2525.8	25.38	25.3	-0.08
41E(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	40962	2627.2	41	20	41160	2647	23.33	23.24	-0.09
41E(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	41094	2640.4	41	20	40896	2620.6	25.38	25.31	-0.07

**LTE Down Link 5CA Call Setup**


PCC Setting: Channel /RB/BW/Modulation

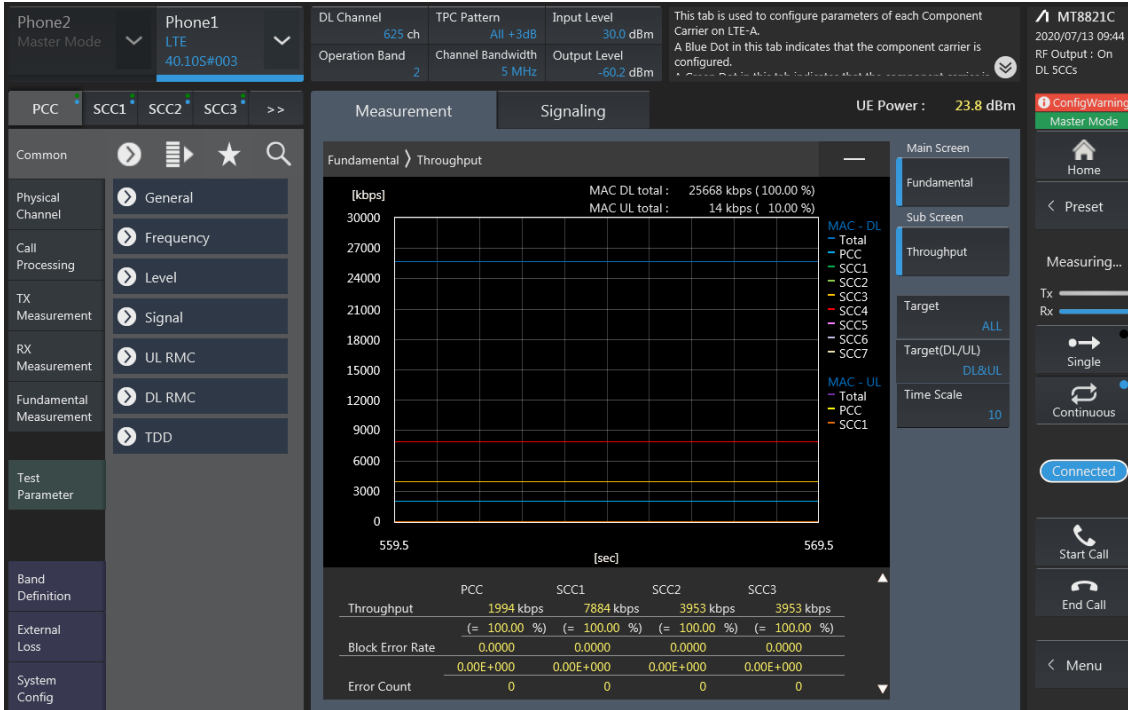


SCC1 Setting (Channel /RB/BW/Modulation )and call Connection

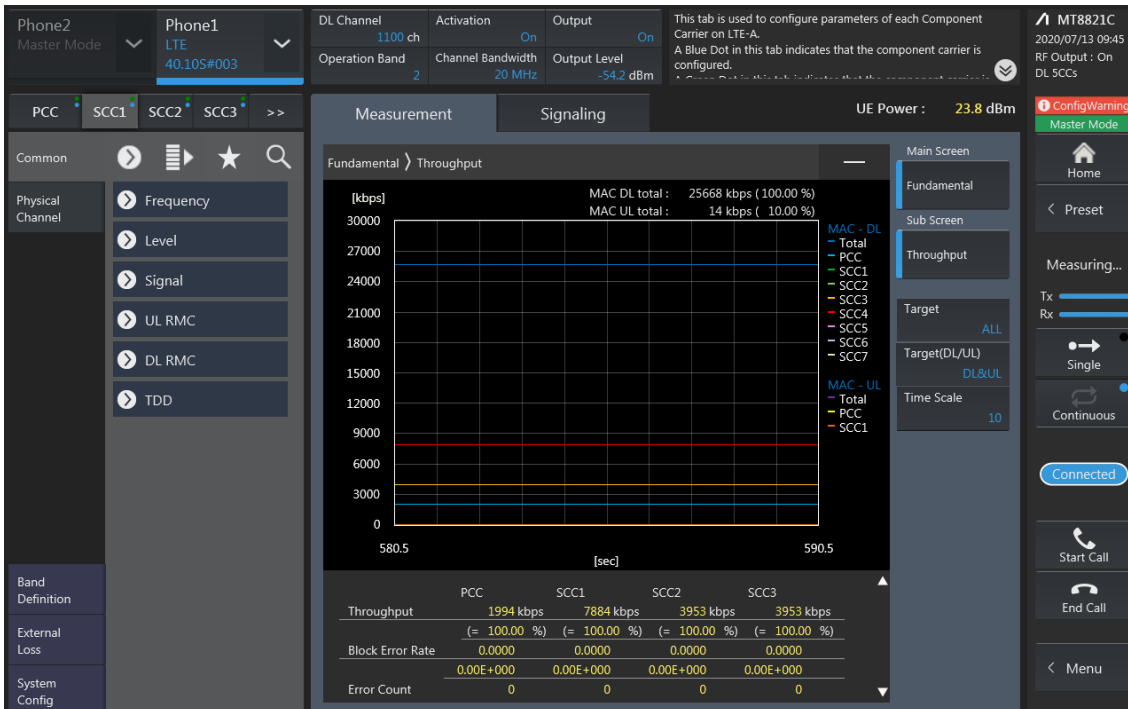


SCC2 Setting (Channel /RB/BW/Modulation)and call Connection

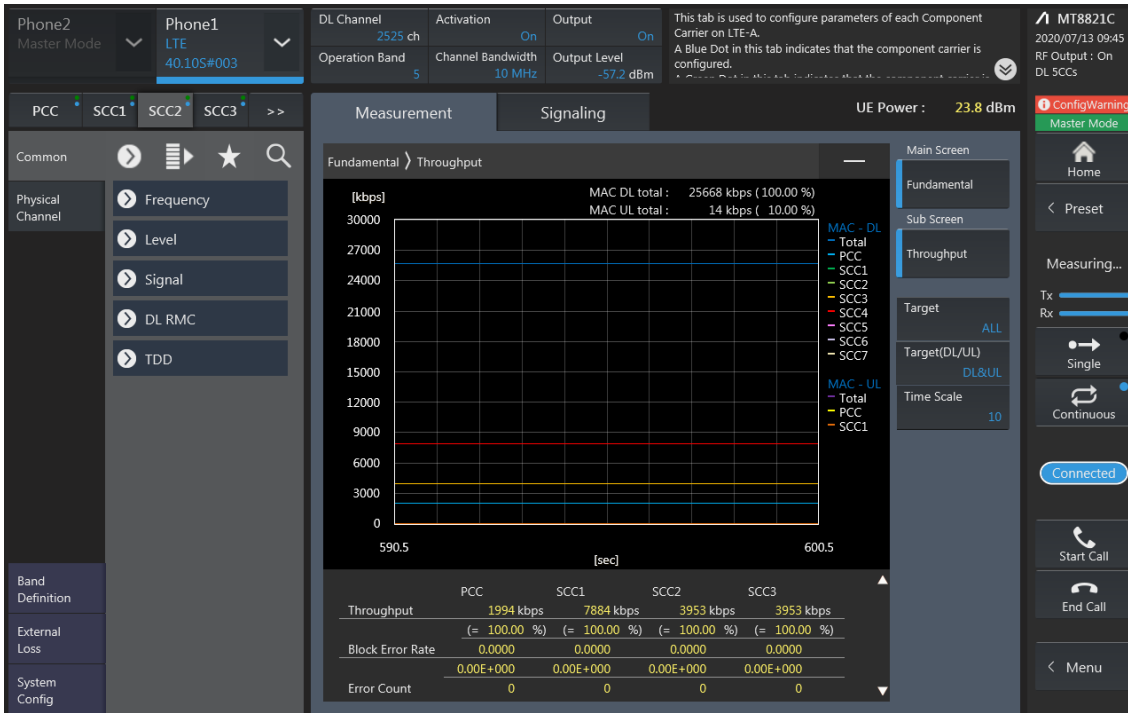

SCC3 Setting (Channel /RB/BW/Modulation )and call Connection

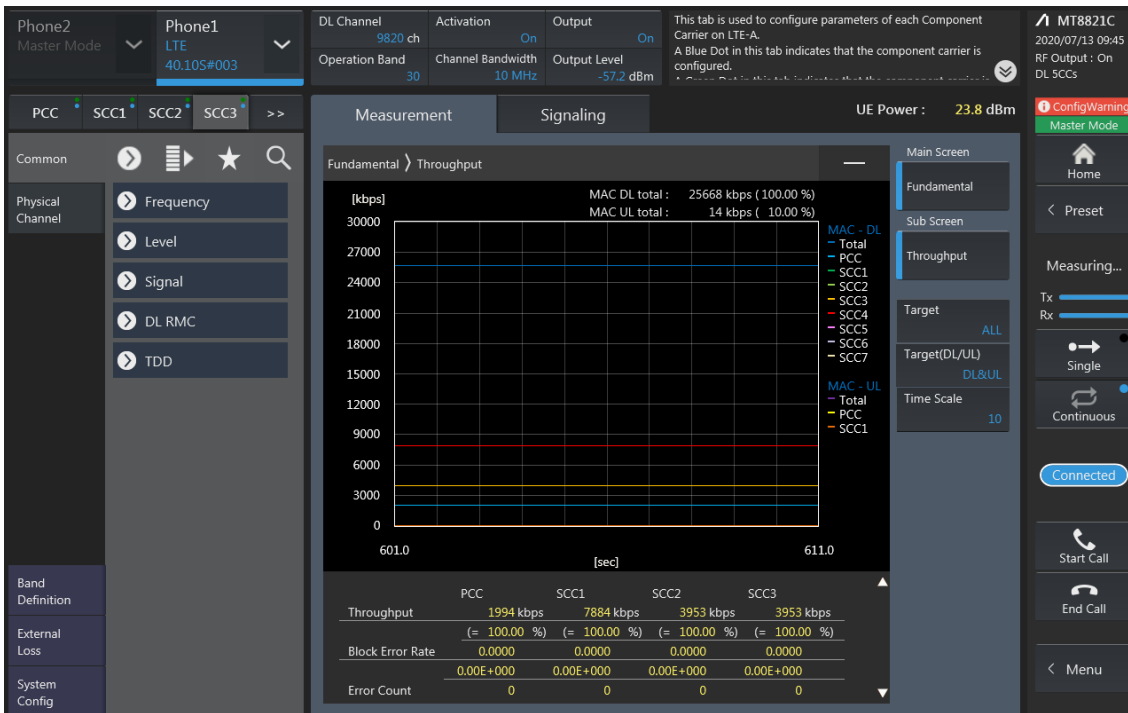

SCC4 Setting (Channel /RB/BW/Modulation )and call Connection

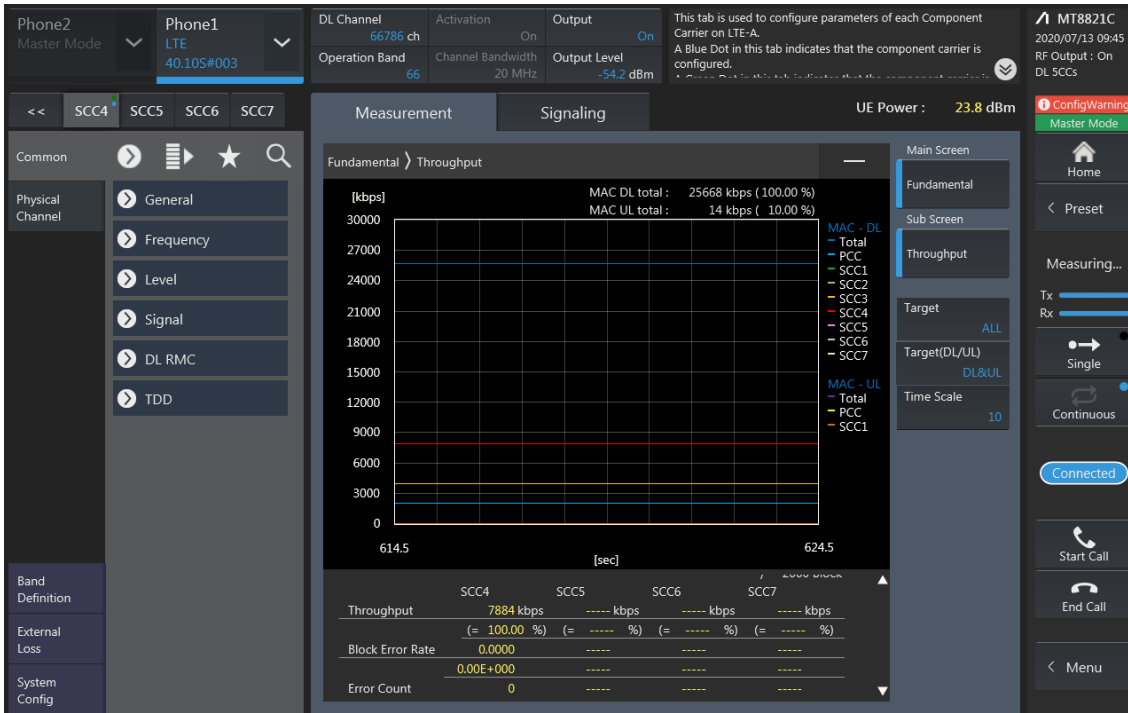

### 5CA Downlink Carrier aggregation Maximum conducted Powers


Combination	PCC									SCC				SCC				SCC				Tx Power		Deviation				
	Band	BW	PCC UL Channel	PCC UL Frequency	PCC DL Channel	PCC DL Frequency	Modulation	RB	offset	Band	BW	SCC DL Channel	SCC DL Frequency	Band	BW	SCC DL Channel	SCC DL Frequency	Band	BW	SCC DL Channel	SCC DL Frequency	Band	BW		SCC DL Channel	SCC DL Frequency	LTE Single Carrier Tx Power (dBm)	LTE Tx Power with DL CA Enabled (dBm)
41C-41D(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	41094	2640.4	41	20	41292	2660.2	41	20	41490	2680	23.33	23.27	-0.06
41C-41D(PC3)	41	10	40620	2593	40620	2593	QPSK	1	0	41	20	40764	2607.4	41	20	40962	2627.2	41	20	41292	2660.2	41	20	41490	2680	23.33	23.25	-0.08
41C-41D(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	39750	2506	41	20	39948	2525.8	41	20	40146	2545.6	25.38	25.22	-0.16
41C-41D(PC2)	41	20	41490	2680	41490	2680	QPSK	1	49	41	20	41292	2660.2	41	20	41094	2640.4	41	20	39750	2506	41	20	39948	2525.8	25.38	25.26	-0.12

## 2. 5G NR Call Box Setup


Procedure used to establish output Power measurement for NR Bands

Select operating band, BW and Channel.

- Click Cell on button in the right of Test application screen.
- Turn the LTE Cell On using "ON/OFF" Key.

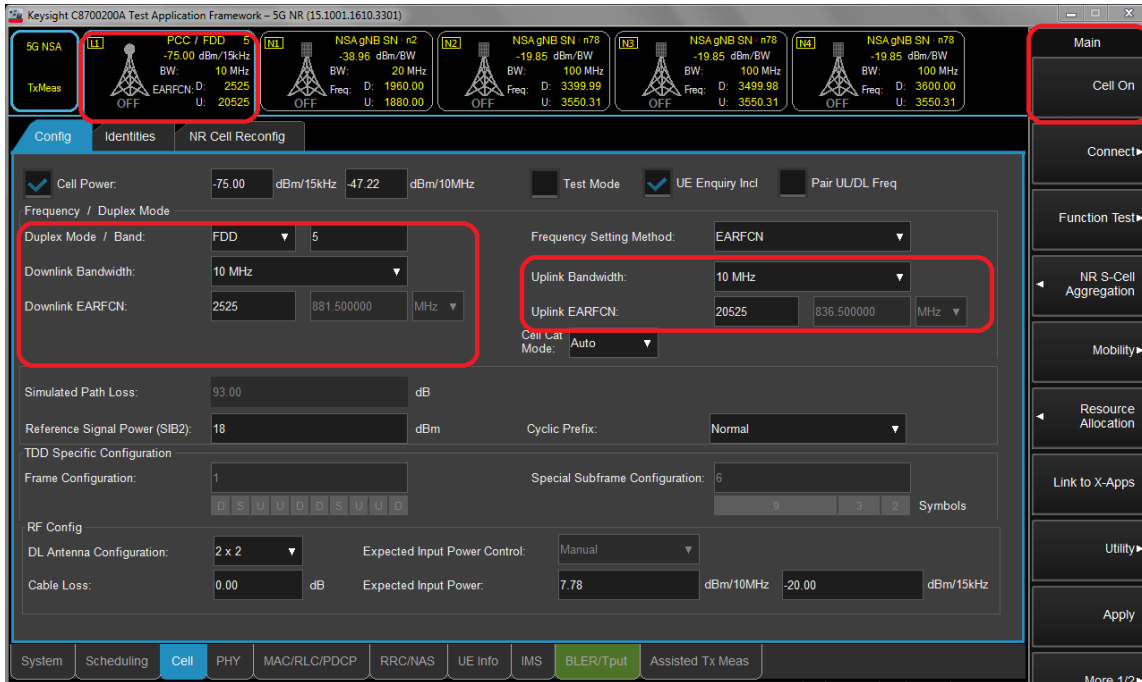


- Turn the Airplane Mode On and then turn the Airplane mode off.
- Select All down bits for UL Power control Mode in LTE.

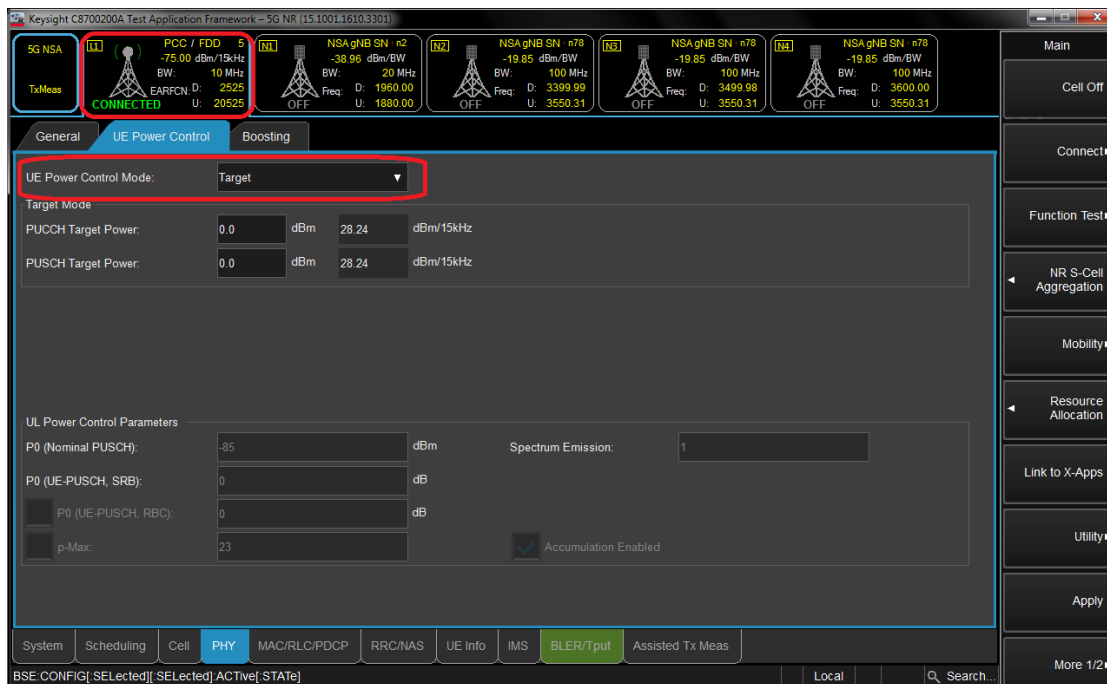




Setup for NR Band

- Select waveform for Setting NR Band (PHY->PUSCH->Enable Transform Precoder)
  - Enable : DFT-s-OFDM, Disable : CP-OFDM

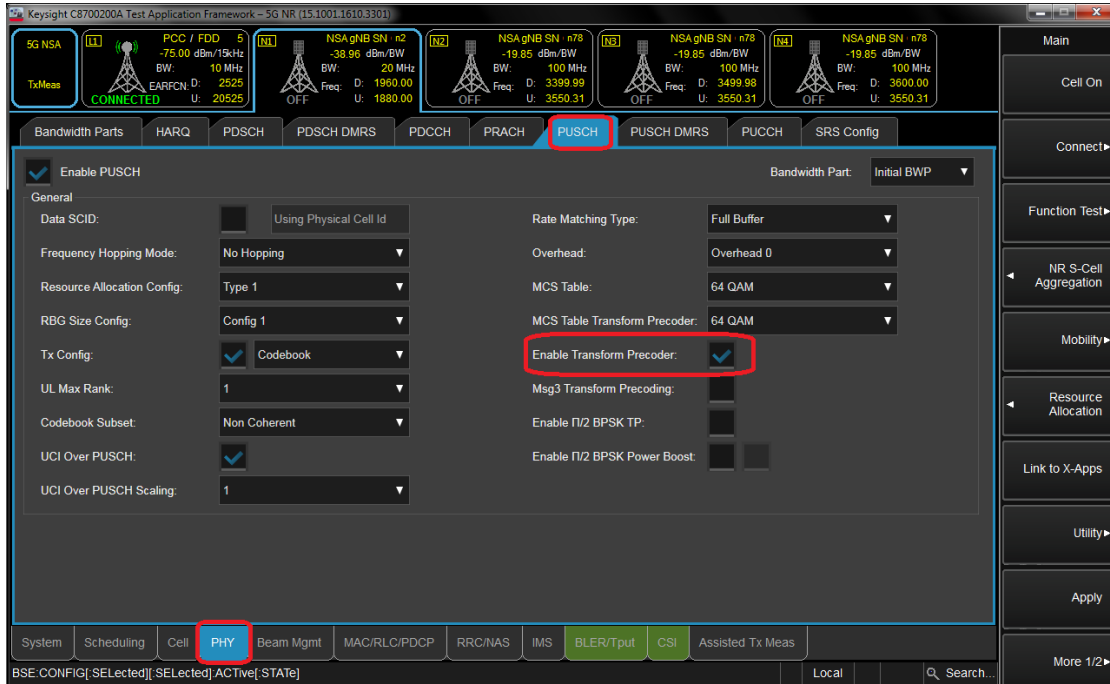


- Select operating band, BW, SCS and Channel.
- Turn the NR Cell On using “ON/OFF” Key.

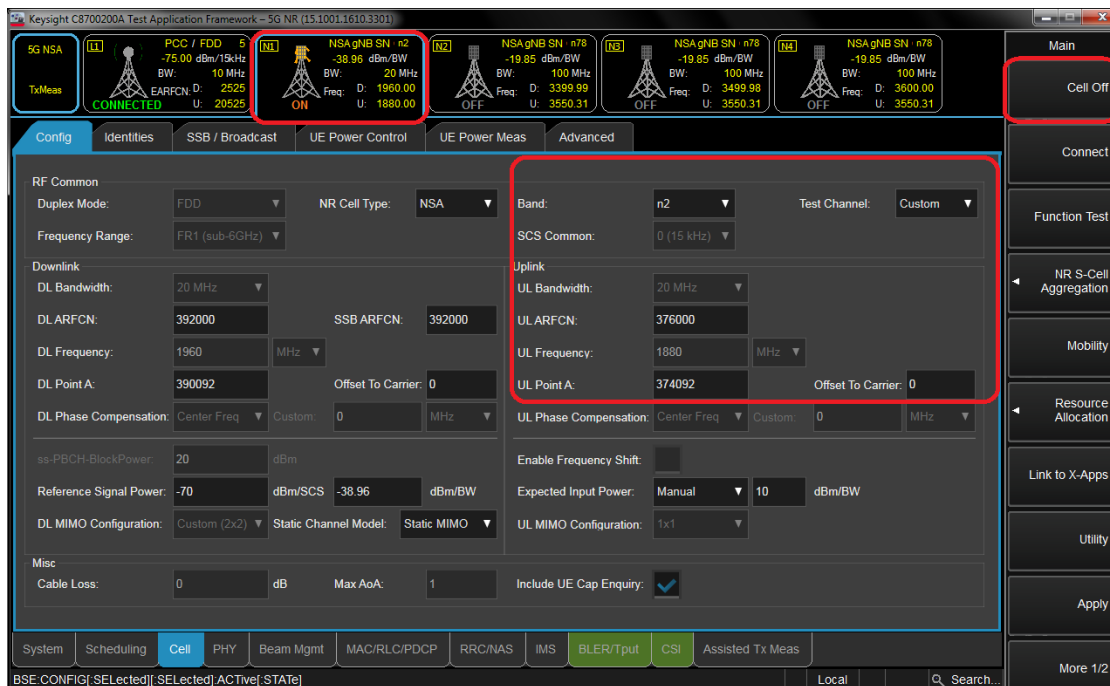


Connect NR S-Cell Aggregation

- Click NR S-Cell Aggregation
- Check the Cell 1's DL and UL box(PCC) and than Click Apply.
- Check the message summary If message shows NR Msg 5, It is connected.

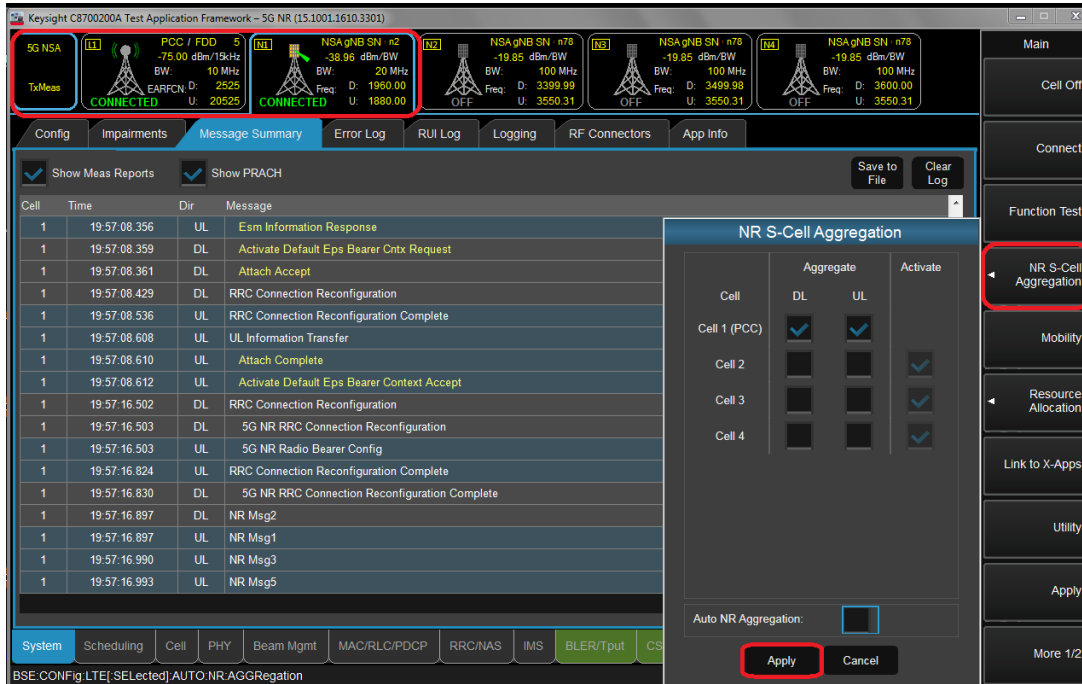

Max Power setting

- Click "Cell in the bottom of screen.
- Click "UE Power control" than change UE Power control mode to All Up bits.

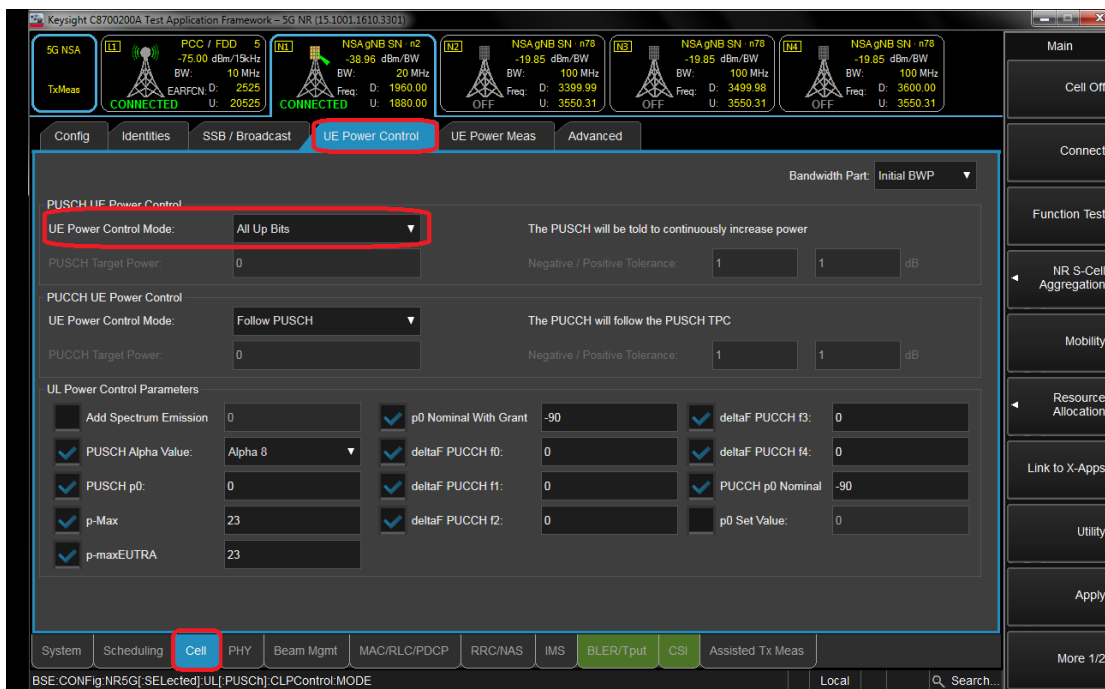

Selecting Start RB/Count/MCS

- Select the each test configuring (Start RB, Count, MCS).



View Tx Power

- Click “Link to X-Apps.”(Please refer to Figure-7)
- Select “Channel Power”.

