



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center

416, Maetan-3dong,  
Yeongtong-gu, Suwon-si,  
Gyeonggi-do, Korea 443-742

# TEST REPORT ON HAC

**Model Tested:** SM-J500M/DS  
**FCC ID (Requested):** A3LSMJ500M  
**Job No:** AM-049  
**Report No:** AM-049-M1  
**Date issued:** 2015-06-16  
**Result Summary:** M3 – 2011 (RF-Emission)

- Abstract -

This document reports on HAC Tests carried out in accordance with ANSI C63.19(2011) §6.3, §7.3; FCC Rule Part(s) FCC 47 CFR §20.19

**Prepared By**

\_\_\_\_\_  
**JR LEE – Test Engineer**

**Authorized By**

\_\_\_\_\_  
**JD JANG – Technical Manager**

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 1 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

# Contents

|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                        | <b>4</b>  |
| <b>2. DESCRIPTION OF DEVICE.....</b>                       | <b>4</b>  |
| <b>3. DESCRIPTION OF TEST EQUIPMENT .....</b>              | <b>5</b>  |
| 3.1 HAC Measurement Setup.....                             | 5         |
| 3.2 Probe Description.....                                 | 6         |
| 3.3 Test Arch Phantom .....                                | 7         |
| 3.4 Validation Dipole .....                                | 7         |
| 3.5 Equipment Calibration .....                            | 8         |
| <b>4. HAC MEASUREMENT PROCEDURE .....</b>                  | <b>9</b>  |
| <b>5. DESCRIPTION OF TEST POSITION .....</b>               | <b>11</b> |
| 5.1 Measurement reference and plane .....                  | 11        |
| <b>6. Measurement Uncertainty.....</b>                     | <b>12</b> |
| <b>7. SYSTEM VERIFICATION.....</b>                         | <b>13</b> |
| 7.1 Test System Validation .....                           | 13        |
| <b>8. MODULATION INTERFERENCE FACTOR.....</b>              | <b>15</b> |
| 8.1 Calibrated Modulation Interference Factors .....       | 15        |
| 8.2 Measured Modulation Interference Factors .....         | 16        |
| 8.3 MIF Measurement Block Diagrams.....                    | 16        |
| <b>9. RF Conducted Power Measurement.....</b>              | <b>17</b> |
| 9.1 Handset Capabilities .....                             | 17        |
| 9.2 HAC measurement conditions .....                       | 17        |
| 9.3 RF conducted Power measurement Block Diagram .....     | 17        |
| 9.4 GSM and WCDMA Conducted Powers .....                   | 18        |
| <b>10. Justification of Held to Ear Modes Tested .....</b> | <b>21</b> |
| 10.1 Analysis of RF Air Interface Technologies .....       | 21        |
| 10.2 Evaluate Low Power Exemption .....                    | 21        |
| 10.3 Conclusion .....                                      | 21        |
| <b>11. Test Results .....</b>                              | <b>22</b> |
| 11.1 Measurement Results (E-field).....                    | 22        |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 2 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|                                                |           |
|------------------------------------------------|-----------|
| 11.2 Worst-case Configuration Evaluation ..... | 23        |
| <b>13. REFERENCES .....</b>                    | <b>24</b> |
| <b>APPENDIX A.....</b>                         | <b>26</b> |
| <b>APPENDIX B.....</b>                         | <b>27</b> |
| <b>APPENDIX C.....</b>                         | <b>28</b> |
| <b>APPENDIX D.....</b>                         | <b>31</b> |
| <b>APPENDIX E.....</b>                         | <b>34</b> |
| <b>APPENDIX F .....</b>                        | <b>60</b> |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 3 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 1. GENERAL INFORMATION

FCC ID : A3LSMJ500M  
 Model Name : SM-J500M/DS  
 Additional Model: SM-J500M  
 Serial Number : AM-049-A  
 Manufacturer : SAMSUNG Electronics  
 Address : 129, Samsung-ro, Suwon-si, Gyeonggi-do, 443-742, Korea  
 Test Standard : ANSI C63.19 - 2011  
 Test Dates : 2015.06.08 ~ 09  
 Tested for : Certification

## 2. DESCRIPTION OF DEVICE

Support Bands : GSM 850/1900, WCDMA 850/1700/1900  
 LTE 2/4/5/17, WLAN 2.4GHz, Bluetooth  
  
 HAC test Configuration : GSM 850, Ch.128/190/251, BT off, WLAN off, LTE off  
 GSM1900, Ch.512/661/810, BT off, WLAN off, LTE off  
  
 EUT Type : Portable Handset  
 Antenna Configuration : Internal Antenna

Indicating Operating modes for Air Interfaces/Bands

| Air- Interface                                                                                                         | Band(MHz) | Type Transport | HAC Tested                                             | Simultaneous Transmissions<br>Not to be tested | Voice Over Digital Transport<br>OTT Capability | WIFI Low Power | Additional GSM Power Reduction |
|------------------------------------------------------------------------------------------------------------------------|-----------|----------------|--------------------------------------------------------|------------------------------------------------|------------------------------------------------|----------------|--------------------------------|
| GSM                                                                                                                    | 850       | VO             | Yes                                                    | Yes: WIFI or BT                                | N/A                                            | N/A            | No                             |
|                                                                                                                        | 190       |                |                                                        |                                                |                                                |                | No                             |
|                                                                                                                        | GPRS/EDGE | DT             | No                                                     | Yes: WIFI or BT                                | Yes                                            | N/A            | N/A                            |
| WCDMA                                                                                                                  | 850       | VD             | No <sub>1</sub>                                        | Yes: WIFI or BT                                | N/A                                            | N/A            | N/A                            |
|                                                                                                                        | 1700      |                |                                                        |                                                |                                                |                | N/A                            |
|                                                                                                                        | 1900      | DT             | No                                                     | Yes: WIFI or BT                                | Yes                                            | N/A            | N/A                            |
| LTE                                                                                                                    | HSPA      |                |                                                        |                                                |                                                |                | N/A                            |
|                                                                                                                        | 700       | DT             | No                                                     | Yes: WIFI or BT                                | N/A                                            | N/A            | N/A                            |
|                                                                                                                        | 850       |                |                                                        |                                                |                                                |                | N/A                            |
|                                                                                                                        | 1700      |                |                                                        |                                                |                                                |                | N/A                            |
|                                                                                                                        | 1900      |                |                                                        |                                                |                                                |                | N/A                            |
| WiFi                                                                                                                   | 2450      | DT             | No                                                     | Yes: GSM,WCDMA or LTE                          | Yes                                            | N/A            | N/A                            |
| BT                                                                                                                     | 2450      | DT             | No                                                     | Yes: GSM,WCDMA or LTE                          | N/A                                            | N/A            | N/A                            |
| Type Transport<br>VO = Voice Only<br>DT = Digital Data – Not intended for CMRS Service<br>VD = CMRS and Data Transport |           |                | Notes:<br>1. Evaluated for MIF and Low-power exemption |                                                |                                                |                |                                |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 4 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### 3. DESCRIPTION OF TEST EQUIPMENT

#### 3.1 HAC Measurement Setup

##### Robotic System

Measurements are performed using the DASY4 (or DASY5) automated dosimetric assessment system. Which is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Stäubli), robot controller, measurement server, Samsung computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

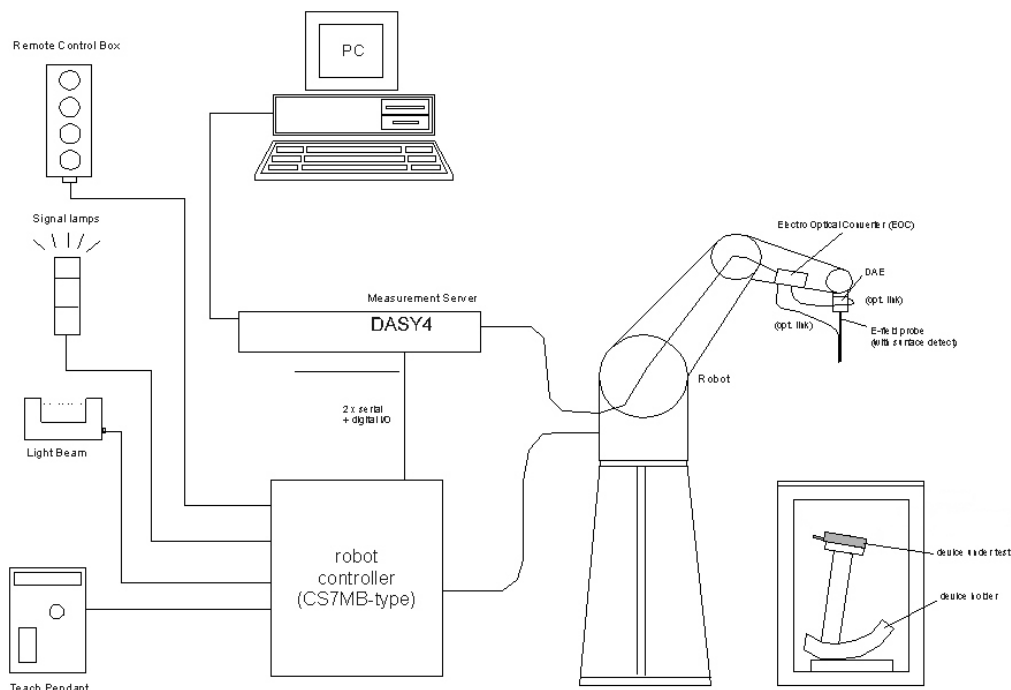


Figure 3.1 SPEAG Robotic System Description

##### System Hardware

A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control is used to drive the robot motors. The PC consists of the Samsung computer with Windows operating system and RF Measurement Software DASY4 (or DASY5) with HAC extension, LCD monitor, mouse and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the measurement server.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 5 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## System Electronics

The DAE4(or DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

## 3.2 Probe Description

### ER3DV6 E-Field Probe Description

Construction: One dipole parallel, two dipoles normal to probe axis  
Built-in shielding against static charges

Calibration: In air from 100 MHz to 3.0 GHz  
(absolute accuracy  $\pm 6.0\%$ ,  $k=2$ )

Frequency: 100 MHz to > 6 GHz;  
Linearity:  $\pm 0.2$  dB (100 MHz to 3 GHz)

Directivity  $\pm 0.2$  dB in air (rotation around probe axis)  
 $\pm 0.4$  dB in air (rotation normal to probe axis)

Dynamic Range 2V/m to 1000V/m  
(M3 or better device readings fall well below diode compression point)

Linearity :  $\pm 0.2$  dB

Dimensions Overall length: 330 mm (Tip: 16 mm)  
Tip diameter: 8 mm (Body: 12 mm)  
Distance from probe tip to dipole centers: 2.5 mm



Figure 3.2 E-field Probe

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 6 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### 3.3 Test Arch Phantom

Enables easy and well defined positioning of the phone and calibration dipoles as well as simple teaching of the robot (See Figure 3.4)

Dimensions: 370 x 370 x 370 mm

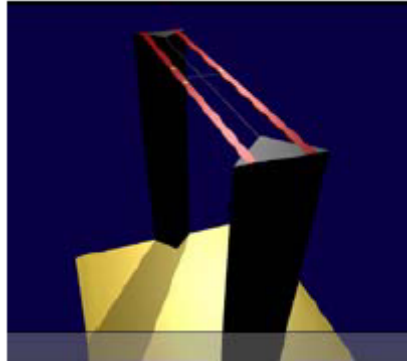


Figure 3.3 Test Arch Phantom

### 3.4 Validation Dipole

The reference dipole should have a return loss better than  $-20$  dB (measured in the setup) at the resonant frequency to reduce the uncertainty in the power measurement.

|             |                                                                                                                                                                                                                                                                 |
|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Application | <ul style="list-style-type: none"><li>- Free space antenna</li><li>- Hearing Aid susceptibility measurements according to ANSI C 63.19</li><li>- Validation of Hearing Aid RF setup for wireless device emission measurement according to ANSI C63.19</li></ul> |
| Frequency   | 835, 1880 MHz                                                                                                                                                                                                                                                   |
| Return Loss | < -20 dB at specified validation position                                                                                                                                                                                                                       |
| Dimensions  | 835MHz : 166.0 x 330 mm<br>1880MHz : 80.8 x 330 mm                                                                                                                                                                                                              |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 7 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### 3.5 Equipment Calibration

| Model                             | Cal. Due Date | Serial No.      |
|-----------------------------------|---------------|-----------------|
| SPEAG DAE4                        | 2016.01.21    | 1241            |
| E-Field Probe ER3DV6              | 2016.05.08    | 2453            |
| Validation Dipole CD835 V3        | 2017.02.17    | 1105            |
| Validation Dipole CD1880 V3       | 2017.01.20    | 1016            |
| Stäubli Robot TX90XL              | -             | F10/5FN5A1/A/01 |
| HAC Phantom                       | -             | 1078            |
| E4438C Signal Generator           | 2016.02.03    | MY45094010      |
| BBS3Q7ECK Power Amp               | 2016.02.04    | 1024            |
| N1912A P-Series Power Meter       | 2016.02.02    | MY45100306      |
| N1912A Wideband Power Sensor      | 2016.02.02    | MY45240464      |
| N1912A Wideband Power Sensor      | 2016.02.02    | MY45240463      |
| N1912A P-Series Power Meter       | 2016.02.02    | MY52370011      |
| E-Series Power meter              | 2016.02.02    | MY52360008      |
| DASY52 S/W (ver 52.8.8)           | -             | -               |
| 778D Directional Coupler          | 2016.02.02    | 20412           |
| E5515C Base Station Simulator     | 2015.11.06    | MY50261069      |
| CMW500 Base Station Simulator     | 2015.08.25    | 141228          |
| Audio Interference Analyzer (AIA) | -             | 1035            |

**Table 3.1 Test Equipment Calibration**


NOTE:

The E-field probe was calibrated by SPEAG.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 8 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

#### 4. HAC MEASUREMENT PROCEDURE

##### Test Instructions

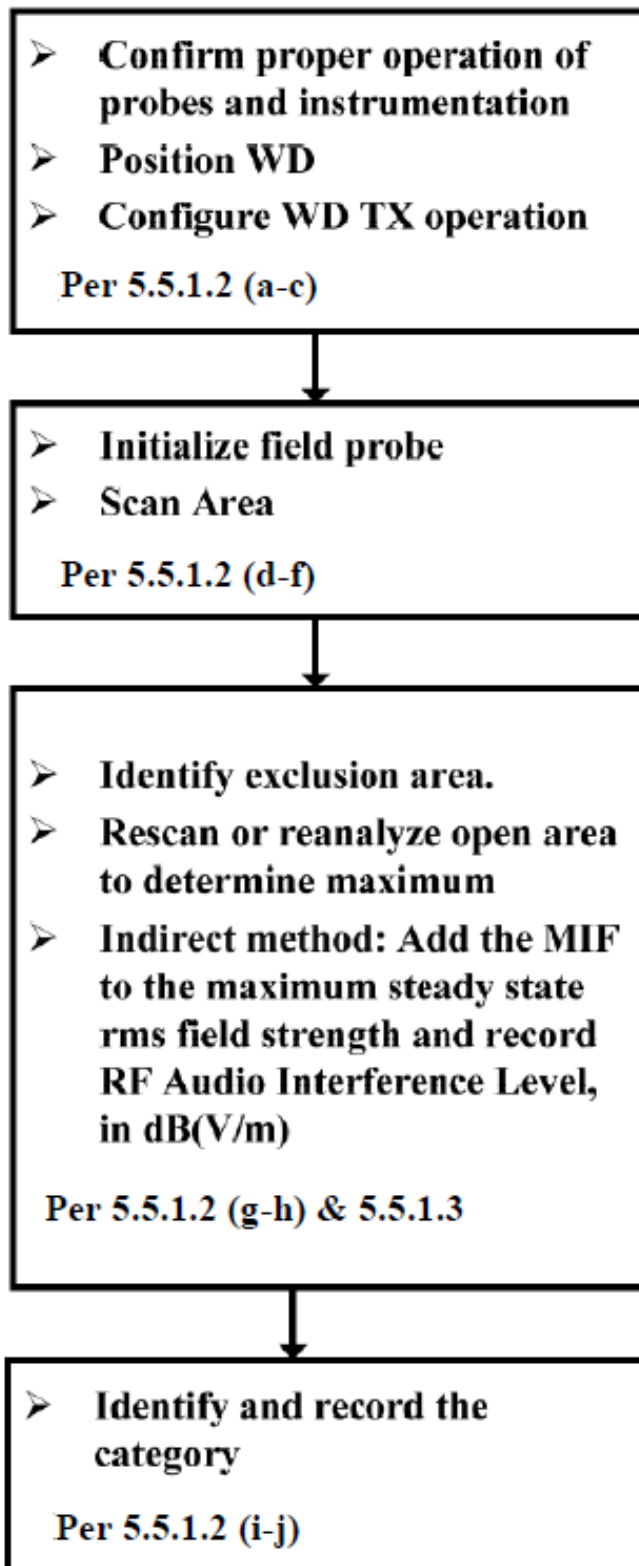

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 9 / 72     |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

The evaluation was performed using the following procedure.

1. Confirm proper operation of the field probe, probe measurement system, and other instrumentation.
2. WD is positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 2mm increments in the 5 x 5 cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1-8 were done for the E-Field measurements.
10. The HAC measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 10 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 5. DESCRIPTION OF TEST POSITION

### 5.1 Measurement reference and plane

1. The grid is 5 cm by 5 cm area that is divided into 9 evenly sized blocks or sub-grids.
2. The grid is centered on the audio frequency output transducer of the WD (speaker or T- coil).
3. The grid is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the WD handset, which, in normal handset use, rest against the ear.
4. The measurement plane is parallel to, and 1.5 cm in front of, the reference plane.



Figure 5.1 Wireless Device and Measurement Plane

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 11 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 6. Measurement Uncertainty

| Source of Uncertainty            | Value                                 | probability distribution | Divisor   | $C_i$<br>E | $u_i(y)$<br>E | $(u_i(y))^2$<br>E | $V_i$ or $V_{eff}$<br>E | $u_i(y)^4/V_{eff}$<br>E |
|----------------------------------|---------------------------------------|--------------------------|-----------|------------|---------------|-------------------|-------------------------|-------------------------|
| <b>Measurement System</b>        |                                       | normal                   | 2.000     | 1          | 5.05          | 25.50             | $\infty$                | 0                       |
| Probe Calibration                | 10.10                                 | normal                   | 2.000     | 1          | 0.25          | 0.06              | $\infty$                | 0                       |
| Axial Isotropy                   | 0.50                                  | normal                   | 2.000     | 1          | 0.30          | 0.09              | $\infty$                | 0                       |
| Linearity                        | 0.60                                  | rectangular              | 1.732     | 1          | 9.53          | 90.75             | $\infty$                | 0                       |
| Sensor Displacement              | 16.50                                 | rectangular              | 1.732     | 1          | 1.39          | 1.92              | $\infty$                | 0                       |
| Boundary Effects                 | 2.40                                  | rectangular              | 1.732     | 1          | 4.16          | 17.28             | $\infty$                | 0                       |
| Phantom Boundary Effects         | 7.20                                  | rectangular              | 1.732     | 1          | 5.77          | 33.33             | $\infty$                | 0                       |
| Scaling with PMR calibration     | 10.00                                 | rectangular              | 1.732     | 1          | 0.14          | 0.02              | $\infty$                | 0                       |
| System Detection Limit           | 0.25                                  | rectangular              | 1.732     | 1          | 0.17          | 0.03              | $\infty$                | 0                       |
| Readout Electronics              | 0.30                                  | rectangular              | 1.732     | 1          | 1.50          | 2.25              | $\infty$                | 0                       |
| Integration time                 | 2.60                                  | normal                   | 1.000     | 1          | 0.21          | 0.04              | 4                       | 0.000490149             |
| System repeatability             | 0.21                                  | normal                   | 1.000     | 1          | 2.48          | 6.17              | 2                       | 19.04220248             |
| RF Reflections                   | 2.48                                  | rectangular              | 1.732     | 1          | 0.69          | 0.48              | $\infty$                | 0                       |
| Probe Positioner                 | 1.20                                  | rectangular              | 1.732     | 1          | 2.71          | 7.36              | $\infty$                | 0                       |
| Probe Positioning                | 4.70                                  | normal                   | 1.000     | 1          | 3.53          | 12.46             | 4                       | 38.8185072              |
| Variability between 2mm & 5mm    | 3.53                                  | rectangular              | 1.732     | 1          | 0.58          | 0.33              | $\infty$                | 0                       |
| Extrap. And Interpolation        | 1.00                                  |                          |           |            |               |                   |                         |                         |
| <b>Test Sample Related</b>       |                                       | rectangular              | 1.732     | 1          | 2.71          | 7.36              | $\infty$                | 0                       |
| Device Positioning Vertical      | 4.70                                  | rectangular              | 1.732     | 1          | 0.58          | 0.33              | $\infty$                | 0                       |
| Device Positioning Lateral       | 1.00                                  | normal                   | 1.000     | 1          | 0.61          | 0.37              | 8                       | 0.016816497             |
| Device Holder and Phantom        | 0.61                                  | rectangular              | 1.732     | 1          | 2.89          | 8.33              | $\infty$                | 0                       |
| Power Drift                      | 5.00                                  |                          |           |            |               |                   |                         |                         |
| <b>Phantom and Setup Related</b> |                                       | rectangular              | 1.732     | 1          | 1.39          | 1.92              | $\infty$                | 0                       |
| Phantom Thickness                | 2.40                                  | normal                   | 2.000     | 1          | 5.05          | 25.50             | $\infty$                | 0                       |
| $u_c(F_s)$                       | <b>Combined Standard Uncertainty</b>  |                          |           |            | 14.71         | 216.41            | 809                     | 57.87801633             |
| $U(F_s)$                         | <b>Expanded Uncertainty(on Power)</b> |                          | normal k= | 2.00       | 29.42         |                   |                         |                         |
| $U(F_s)$                         | <b>Expanded Uncertainty(on Field)</b> |                          | normal k= | 2.00       | 14.71         |                   |                         |                         |

## 7. SYSTEM VERIFICATION


### 7.1 Test System Validation

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specification at 835MHz and 1880MHz by using the system validation kit(s). (see Appendix C, Graphic Plot Attached)

| Frequency | Targeted E-field (V/m) | Measured E-field (V/m) | Deviation (%) | Date       |
|-----------|------------------------|------------------------|---------------|------------|
| 835 MHz   | 106.8                  | 113.58                 | 6.35          | 2015.06.08 |
| 1880 MHz  | 90.4                   | 90.22                  | -0.2          | 2015.06.09 |

\*Validation was measured with input power 100 mW.

**Table 7.1 System Validation Results**

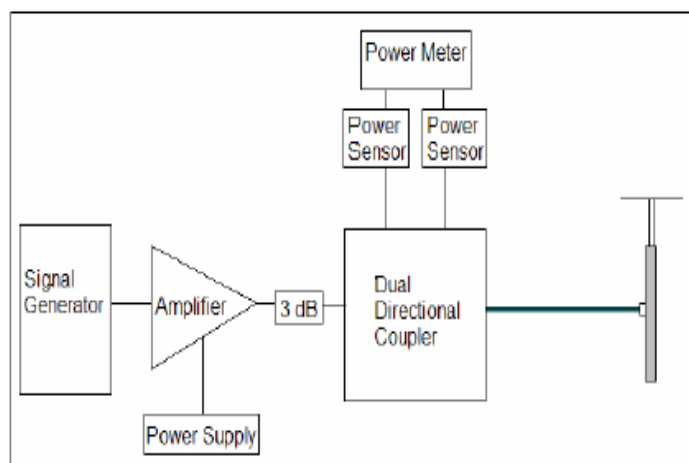

**Figure 7.1 Dipole Validation Test Setup**

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 13 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

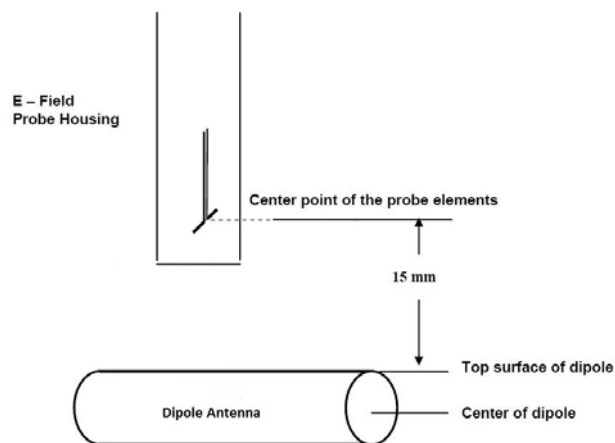


Figure 7.2 Separation Distance from Dipole to Field Probe

Validations of the DASY4(or DASY5) test system were performed using the measurement equipment listed in Section 3.2. All validations occur in free space using the DASY4(or DASY5) test arch. Note that the 15mm probe to dipole separation is measured from the top edge of the dipole to the calibration reference point of the probe. SPEAG uses the center point of the probe sensor(s) as the reference point when establishing targets for their dipoles. Therefore, because SPEAG's dipoles and targets are used, it is appropriate to measure the 15mm separation distance to the center of the sensors as they do. This reference point was used for validation only. Validations were performed at 1880 MHz. These frequencies are within each operating band and are within 2MHz of the mid-band frequency of the test device. The obtained results from the validations are displayed in the table 7.2.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 14 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 8. MODULATION INTERFERENCE FACTOR

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be determined that relates its interference potential to its steady-state RMS signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. The MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic; any change in modulation characteristic requires determination and application of a new MIF.

### 8.1 Calibrated Modulation Interference Factors

Manufacturer (SPEAG) provides the probe calibration services about MIF for various modulations. Test lab can use MIF value from manufacturer.

| Band    | Channel | MIF[dB] |
|---------|---------|---------|
| GSM850  | 128     | 3.63    |
|         | 190     |         |
|         | 251     |         |
| GSM1900 | 512     |         |
|         | 661     |         |
|         | 810     |         |

Table 8.1 MIF Table for GSM

| Mode          | WCDMA850 [dB] |      |      | WCDMA1700 [dB] |      |      | WCDMA1900 [dB] |      |      |
|---------------|---------------|------|------|----------------|------|------|----------------|------|------|
|               | 4132          | 4183 | 4233 | 1312           | 1412 | 1862 | 9262           | 9400 | 9538 |
| 12.2 Kbps RMC | -27.23        |      |      |                |      |      |                |      |      |
| 12.2 Kbps AMR |               |      |      |                |      |      |                |      |      |

Table 8.2 MIF Table for WCDMA

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 15 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 8.2 Measured Modulation Interference Factors

The following procedure was used to measure the MIF using the SPEAG Audio Interference Analyzer.

1. The device was placed into a simulated call using a base station simulator or set to transmit using test software for a given mode.
2. The device was then set to continuously transmit at maximum power.
3. Using a coupler or divider if needed, the device output signal was connected to the RF In port of the AIA (Audio Interference Analyzer), which was connected to a desktop computer. Alternatively, a radiated RF signal may be used with the AIA's built-in antenna.
4. The MIF measurement procedure in the DASY software was run, and the resulting MIF value was recorded.
5. Steps 1-4 were repeated for all CMRS air interfaces, frequency bands, and modulations.

## 8.3 MIF Measurement Block Diagrams

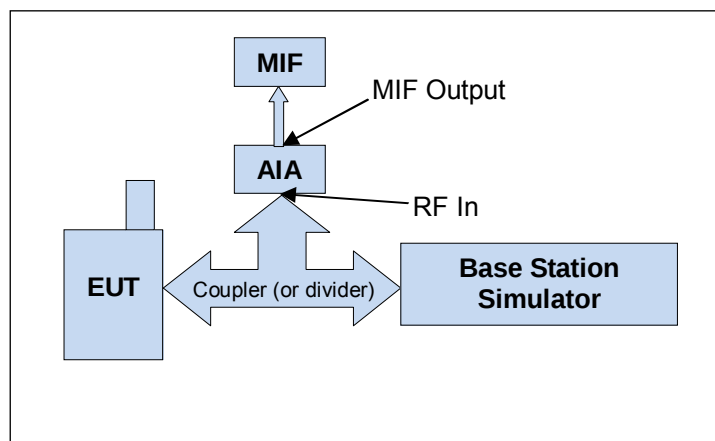


Figure 8.1 MIF Measurement Setup using a Base Station Simulator

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 16 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 9. RF Conducted Power Measurement

### 9.1 Handset Capabilities

The Handset was placed into a simulated call using base station simulator in a shielded chamber. Such as test signals offer a consistent means for testing HAC and are recommended for evaluating HAC. Measurements were taken with a fully charged battery. In order to verify that the device was tested and maintained at full power, this was configured with the base station simulator.

### 9.2 HAC measurement conditions


Conducted power of all air interfaces were measured with base station simulator and EUT power was set to maximum output power level.

| Air Interfaces | Parameter Name | Setting Parameter         |
|----------------|----------------|---------------------------|
| GSM            | PLC            | GSM850: '5', GSM1900: '0' |
| WCDMA          | TPC            | All up bits               |

**Table 9.1 Power Control Parameters and setting by Air Interface**

### 9.3 RF conducted Power measurement Block Diagram

Power Measurement were performed using a base station simulator under digital average power.

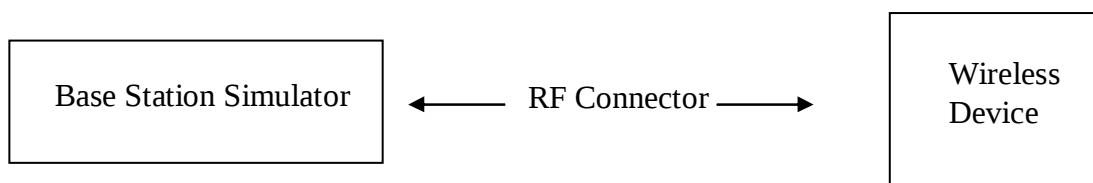

**Figure 9.1 Power Measurement Setup**

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 17 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 9.4 GSM and WCDMA Conducted Powers

| Band         | Channel | GSM            | GPRS Data                     |                               |                               |                               | EDGE Data                     |                               |                               |                               |
|--------------|---------|----------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
|              |         | Voice<br>(dBm) | GPRS<br>1 TX<br>Slot<br>(dBm) | GPRS<br>2 TX<br>Slot<br>(dBm) | GPRS<br>3 TX<br>Slot<br>(dBm) | GPRS<br>4 TX<br>Slot<br>(dBm) | EDGE<br>1 TX<br>Slot<br>(dBm) | EDGE<br>2 TX<br>Slot<br>(dBm) | EDGE<br>3 TX<br>Slot<br>(dBm) | EDGE<br>4 TX<br>Slot<br>(dBm) |
| Target Power |         | 33             | 33                            | 31.5                          | 29                            | 27                            | 27                            | 25.5                          | 23.5                          | 22                            |
| GSM850       | 128     | 32.55          | 32.53                         | 31.64                         | 28.82                         | 27.07                         | 27.11                         | 25.23                         | 23.36                         | 21.94                         |
|              | 190     | 32.80          | 32.77                         | 31.84                         | 29.05                         | 26.94                         | 27.36                         | 25.51                         | 23.66                         | 22.07                         |
|              | 251     | 32.89          | 32.87                         | 31.52                         | 29.18                         | 27.06                         | 27.18                         | 25.31                         | 23.48                         | 22.06                         |
| Target Power |         | 30.00          | 30.00                         | 28.50                         | 27.00                         | 25.50                         | 27.00                         | 24.50                         | 22.50                         | 21.00                         |
| GSM1900      | 512     | 30.22          | 30.27                         | 28.49                         | 27.28                         | 25.67                         | 27.30                         | 24.61                         | 22.60                         | 21.32                         |
|              | 661     | 30.17          | 30.21                         | 28.65                         | 27.10                         | 25.47                         | 27.33                         | 24.61                         | 22.58                         | 21.30                         |
|              | 810     | 29.81          | 29.84                         | 28.30                         | 26.87                         | 25.26                         | 26.98                         | 24.32                         | 22.29                         | 21.03                         |

Table 9.2 Conducted Power Table for GSM

| 3GPP Release | Mode     | 3GPP 34.121 Subtest | Cellular Band [dBm] |                |                      |       |                |                      |       |                |                      | MPR Target | Target Value |
|--------------|----------|---------------------|---------------------|----------------|----------------------|-------|----------------|----------------------|-------|----------------|----------------------|------------|--------------|
| Version      |          |                     | 4132                | Tolerance (dB) | Power reduction (dB) | 4183  | Tolerance (dB) | Power reduction (dB) | 4233  | Tolerance (dB) | Power reduction (dB) |            |              |
| 99           | WCDMA    | 12.2 kbps RMC       | 22.59               | 21~23          |                      | 22.68 | 21~23          |                      | 22.57 | 21~23          |                      | -          | 22.5         |
| 99           | WCDMA    | 12.2 kbps AMR       | 22.52               | 21~23          |                      | 22.66 | 21~23          |                      | 22.56 | 21~23          |                      | -          | 22.5         |
| 5            | HSDPA    | Subtest 1           | 22.49               | 21~23          | 0.01                 | 22.63 | 21~23          | -0.13                | 22.54 | 21~23          | -0.04                | 0          | 22.5         |
| 5            |          | Subtest 2           | 22.52               | 21~23          | -0.02                | 22.65 | 21~23          | -0.15                | 22.54 | 21~23          | -0.04                | 0          | 22.5         |
| 5            |          | Subtest 3           | 22.46               | 20.5~22.5      | 0.04                 | 22.62 | 20.5~22.5      | -0.12                | 22.53 | 20.5~22.5      | -0.03                | 0.5        | 22.0         |
| 5            |          | Subtest 4           | 22.53               | 20.5~22.5      | -0.03                | 22.63 | 20.5~22.5      | -0.13                | 22.52 | 20.5~22.5      | -0.02                | 0.5        | 22.0         |
| 6            | HSUPA    | Subtest 1           | 22.19               | 21~23          | 0.31                 | 22.51 | 21~23          | -0.01                | 22.41 | 21~23          | 0.09                 | 0          | 22.5         |
| 6            |          | Subtest 2           | 20.47               | 19~21          | 2.03                 | 20.58 | 19~21          | 1.92                 | 20.71 | 19~21          | 1.79                 | 2          | 20.5         |
| 6            |          | Subtest 3           | 21.15               | 20~22          | 1.35                 | 21.49 | 20~22          | 1.01                 | 21.35 | 20~22          | 1.15                 | 1          | 21.5         |
| 6            |          | Subtest 4           | 19.19               | 19~21          | 3.31                 | 19.38 | 19~21          | 3.12                 | 19.31 | 19~21          | 3.19                 | 2          | 20.5         |
| 6            |          | Subtest 5           | 22.15               | 21~23          | 0.35                 | 22.50 | 21~23          | 0.00                 | 22.39 | 21~23          | 0.11                 | 0          | 22.5         |
| 8            | DC-HSDPA | Subtest 1           | 22.40               | 21~23          | 0.10                 | 22.65 | 21~23          | -0.15                | 22.58 | 21~23          | -0.08                | 0          | 22.5         |
| 8            |          | Subtest 2           | 22.41               | 21~23          | 0.09                 | 22.64 | 21~23          | -0.14                | 22.55 | 21~23          | -0.05                | 0          | 22.5         |
| 8            |          | Subtest 3           | 22.41               | 20.5~22.5      | 0.09                 | 22.63 | 20.5~22.5      | -0.13                | 22.56 | 20.5~22.5      | -0.06                | 0.5        | 22.0         |
| 8            |          | Subtest 4           | 22.42               | 20.5~22.5      | 0.08                 | 22.62 | 20.5~22.5      | -0.12                | 22.54 | 20.5~22.5      | -0.04                | 0.5        | 22.0         |

Table 9.3 Conducted Power Table for WCDMA850

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 18 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

| 3GPP    | Mode     | 3GPP 34.121   | PCS Band [dBm] |                |                      |       |                |                      |       |                |                      | MPR Target | Target Value |
|---------|----------|---------------|----------------|----------------|----------------------|-------|----------------|----------------------|-------|----------------|----------------------|------------|--------------|
| Release |          | Subtest       |                |                |                      |       |                |                      |       |                |                      |            |              |
| Version |          |               | 9262           | Tolerance (dB) | Power reduction (dB) | 9400  | Tolerance (dB) | Power reduction (dB) | 9538  | Tolerance (dB) | Power reduction (dB) |            |              |
| 99      | WCDMA    | 12.2 kbps RMC | 22.81          | 21~23          |                      | 22.77 | 21~23          |                      | 22.61 | 21~23          |                      | -          | 22.5         |
| 99      | WCDMA    | 12.2 kbps AMR | 22.75          | 21~23          |                      | 22.73 | 21~23          |                      | 22.58 | 21~23          |                      | -          | 22.5         |
| 5       | HSDPA    | Subtest 1     | 21.80          | 20~22          | -0.30                | 21.73 | 20~22          | -0.23                | 21.65 | 20~22          | -0.15                | 0          | 21.5         |
| 5       |          | Subtest 2     | 21.76          | 20~22          | -0.26                | 21.75 | 20~22          | -0.25                | 21.62 | 20~22          | -0.12                | 0          | 21.5         |
| 5       |          | Subtest 3     | 21.34          | 19.5~21.5      | 0.16                 | 21.26 | 19.5~21.5      | 0.24                 | 21.12 | 19.5~21.5      | 0.38                 | 0.5        | 21.0         |
| 5       |          | Subtest 4     | 21.30          | 19.5~21.5      | 0.20                 | 21.28 | 19.5~21.5      | 0.22                 | 21.13 | 19.5~21.5      | 0.37                 | 0.5        | 21.0         |
| 6       | HSUPA    | Subtest 1     | 21.82          | 20~22          | -0.32                | 21.67 | 20~22          | -0.17                | 21.04 | 20~22          | 0.46                 | 0          | 21.5         |
| 6       |          | Subtest 2     | 20.30          | 18~20          | 1.20                 | 20.23 | 18~20          | 1.27                 | 20.06 | 18~20          | 1.44                 | 2          | 19.5         |
| 6       |          | Subtest 3     | 20.00          | 19~21          | 1.50                 | 20.04 | 19~21          | 1.46                 | 20.24 | 19~21          | 1.26                 | 1          | 20.5         |
| 6       |          | Subtest 4     | 20.78          | 18~20          | 0.72                 | 20.68 | 18~20          | 0.82                 | 20.81 | 18~20          | 0.69                 | 2          | 19.5         |
| 6       |          | Subtest 5     | 21.57          | 20~22          | -0.07                | 21.49 | 20~22          | 0.01                 | 21.01 | 20~22          | 0.49                 | 0          | 21.5         |
| 8       | DC-HSDPA | Subtest 1     | 21.67          | 20~22          | -0.17                | 21.72 | 20~22          | -0.22                | 21.56 | 20~22          | -0.06                | 0          | 21.5         |
| 8       |          | Subtest 2     | 21.53          | 20~22          | -0.03                | 21.73 | 20~22          | -0.23                | 21.53 | 20~22          | -0.03                | 0          | 21.5         |
| 8       |          | Subtest 3     | 21.07          | 19.5~21.5      | 0.43                 | 21.25 | 19.5~21.5      | 0.25                 | 21.03 | 19.5~21.5      | 0.47                 | 0.5        | 21.0         |
| 8       |          | Subtest 4     | 21.07          | 19.5~21.5      | 0.43                 | 21.25 | 19.5~21.5      | 0.25                 | 21.05 | 19.5~21.5      | 0.45                 | 0.5        | 21.0         |

Table 9.4 Conducted Power Table for WCDMA1900

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 19 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

| 3GPP    | Mode     | 3GPP 34.121   | AWS Band [dBm] |                |                      |       |                |                      |       |                |                      | MPR Target | Target Value |
|---------|----------|---------------|----------------|----------------|----------------------|-------|----------------|----------------------|-------|----------------|----------------------|------------|--------------|
| Release |          | Subtest       |                |                |                      |       |                |                      |       |                |                      |            |              |
| Version |          |               | 1312           | Tolerance (dB) | Power reduction (dB) | 1412  | Tolerance (dB) | Power reduction (dB) | 1512  | Tolerance (dB) | Power reduction (dB) |            |              |
| 99      | WCDMA    | 12.2 kbps RMC | 22.49          | 21~23          |                      | 22.78 | 21~23          |                      | 22.82 | 21~23          |                      | -          | 22.5         |
| 99      | WCDMA    | 12.2 kbps AMR | 22.49          | 21~23          |                      | 22.79 | 21~23          |                      | 22.84 | 21~23          |                      | -          | 22.5         |
| 5       | HSDPA    | Subtest 1     | 21.50          | 20~22          | 1.00                 | 21.66 | 20~22          | 0.84                 | 21.82 | 20~22          | 0.68                 | 0          | 21.5         |
| 5       |          | Subtest 2     | 21.45          | 20~22          | 1.05                 | 21.65 | 20~22          | 0.85                 | 21.79 | 20~22          | 0.71                 | 0          | 21.5         |
| 5       |          | Subtest 3     | 20.98          | 19.5~21.5      | 1.52                 | 21.19 | 19.5~21.5      | 1.31                 | 21.33 | 19.5~21.5      | 1.17                 | 0.5        | 21.0         |
| 5       |          | Subtest 4     | 21.01          | 19.5~21.5      | 1.49                 | 21.20 | 19.5~21.5      | 1.30                 | 21.35 | 19.5~21.5      | 1.15                 | 0.5        | 21.0         |
| 6       | HSUPA    | Subtest 1     | 21.32          | 20~22          | 1.18                 | 21.69 | 20~22          | 0.81                 | 21.82 | 20~22          | 0.68                 | 0          | 21.5         |
| 6       |          | Subtest 2     | 20.04          | 18~20          | 2.46                 | 20.29 | 18~20          | 2.21                 | 20.64 | 18~20          | 1.86                 | 2          | 19.5         |
| 6       |          | Subtest 3     | 20.51          | 19~21          | 1.99                 | 20.05 | 19~21          | 2.45                 | 20.85 | 19~21          | 1.65                 | 1          | 20.5         |
| 6       |          | Subtest 4     | 20.98          | 18~20          | 1.52                 | 20.72 | 18~20          | 1.78                 | 20.85 | 18~20          | 1.65                 | 2          | 19.5         |
| 6       |          | Subtest 5     | 21.47          | 20~22          | 1.03                 | 21.52 | 20~22          | 0.98                 | 21.82 | 20~22          | 0.68                 | 0          | 21.5         |
| 8       | DC-HSDPA | Subtest 1     | 21.40          | 20~22          | 1.10                 | 21.56 | 20~22          | 0.94                 | 21.70 | 20~22          | 0.80                 | 0          | 21.5         |
| 8       |          | Subtest 2     | 21.46          | 20~22          | 1.04                 | 21.55 | 20~22          | 0.95                 | 21.61 | 20~22          | 0.89                 | 0          | 21.5         |
| 8       |          | Subtest 3     | 21.07          | 19.5~21.5      | 1.43                 | 21.07 | 19.5~21.5      | 1.43                 | 21.24 | 19.5~21.5      | 1.26                 | 0.5        | 21.0         |
| 8       |          | Subtest 4     | 21.07          | 19.5~21.5      | 1.43                 | 21.05 | 19.5~21.5      | 1.45                 | 21.23 | 19.5~21.5      | 1.27                 | 0.5        | 21.0         |

Table 9.5 Conducted Power Table for WCDMA1700

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 20 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 10. Justification of Held to Ear Modes Tested

An RF air interface technology of a device is exempt from testing when its average conducted power plus its MIF is  $\leq 17\text{dBm}$  for all of its operating modes.

See below for measured conducted power for applicable device modes..

### 10.1 Analysis of RF Air Interface Technologies

1. According to the April 2013 TCB workshop slides, WIFI and other OTT data services are outside the current definition of a managed CMRS service and are currently not required to be evaluated.
2. An analysis was performed, following the guidance of §4.3 and §4.4 of the ANSI standard, of the RF air interface technologies being evaluated. The factors that will affect the RF interference potential were evaluated, and the worst case operating modes were identified and used in the evaluation. A WD's interference potential is a function both WD's average near-field field air interface technologies that have low power have been found to produce sufficiently low RF interference potential, so it is possible to exempt them from the product testing specified in Clause 5 of the ANSI standard. An RF air interface technology of a device is exempt from testing when its average antenna input power plus its MIF is  $\leq 17\text{dBm}$  for all of its operating modes.

The worst case MIF plus the worst case average antenna input power for all modes are investigated below to determine the testing requirements for this device.

### 10.2 Evaluate Low Power Exemption

| Air Interfaces | Maximum Average Power (dBm) | MIF (dB) | Total (Power + MIF) | Testing Required |
|----------------|-----------------------------|----------|---------------------|------------------|
| GSM850         | 23.86*                      | 3.63     | 36.52               | Y                |
| GSM1900        | 21.19*                      | 3.63     | 33.85               | Y                |
| WCDMA - RMC    | 22.81                       | -27.23   | -4.42               | N                |
| WCDMA - AMR    | 22.75                       | -27.23   | -4.48               | N                |

Table 10-1 Evaluation for Low Power Exemptions

\*Note: C63.19 Footnote 20 (Page.13) indicates the use of a long averaging time for measuring the antenna input power when using this method of exclusion. Therefore, the frame averaged power was calculated for these modes in this investigation.

### 10.3 Conclusion

Per ANSI C63.19-2011, RF-Emissions testing for this device is required only for GSM voice modes. All other air interfaces are exempt.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 21 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 11. Test Results

### 11.1 Measurement Results (E-field)

#### E-FIELD EMISSIONS:

##### Ambient Conditions

|                        |            |
|------------------------|------------|
| Date                   | 2015.06.09 |
| Temperature in Lab(°C) | 22.0       |
| Humidity in Lab(%)     | 50         |

| Mode              | Channel | Scan Center | Conducted Power [dBm] | Time Avg.Field [V/m] | Time Avg.Field [dBV/m] | Modulation Interference Factor | Audio Interference Level [dBV/m] | Category  | FCC limit [dBV/m] | FCC Margin[dB] | Excl Blocks per 5.5 |
|-------------------|---------|-------------|-----------------------|----------------------|------------------------|--------------------------------|----------------------------------|-----------|-------------------|----------------|---------------------|
| E-field Emissions |         |             |                       |                      |                        |                                |                                  |           |                   |                |                     |
| GSM850            | 128     | Acoustic    | 32.55                 | <b>44.67</b>         | 33.00                  | 3.63                           | <b>36.63</b>                     | <b>M4</b> | 40.0              | 3.37           | None                |
| GSM850            | 190     | Acoustic    | 32.80                 | <b>46.29</b>         | 33.31                  | 3.63                           | <b>36.94</b>                     | <b>M4</b> | 40.0              | 3.06           | None                |
| GSM850            | 251     | Acoustic    | 32.89                 | <b>54.33</b>         | 34.70                  | 3.63                           | <b>38.33</b>                     | <b>M4</b> | 40.0              | 1.67           | None                |
| GSM1900           | 512     | Acoustic    | 30.22                 | <b>21.88</b>         | 26.80                  | 3.63                           | <b>30.43</b>                     | <b>M3</b> | 35.0              | 4.57           | None                |
| GSM1900           | 661     | Acoustic    | 30.17                 | <b>25.26</b>         | 28.05                  | 3.63                           | <b>31.68</b>                     | <b>M3</b> | 35.0              | 3.32           | None                |
| GSM1900           | 810     | Acoustic    | 29.81                 | <b>21.98</b>         | 26.84                  | 3.63                           | <b>30.47</b>                     | <b>M3</b> | 35.0              | 4.53           | None                |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 22 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## 11.2 Worst-case Configuration Evaluation

### Ambient Conditions

|                        |            |
|------------------------|------------|
| Date                   | 2015.06.09 |
| Temperature in Lab(°C) | 22.0       |
| Humidity in Lab(%)     | 50         |

### Peak Reading 360 degree Probe Rotation at Azimuth axis

| Mode                     | Channel | Scan Center | Conducted Power [dBm] | Time Avg.Field [V/m] | Time Avg.Field [dBV/m] | Modulation Interference Factor | Audio Interference Level [dBV/m] | Category  | FCC limit [dBV/m] | FCC Margin[dB] | Excl Blocks per 5.5 |
|--------------------------|---------|-------------|-----------------------|----------------------|------------------------|--------------------------------|----------------------------------|-----------|-------------------|----------------|---------------------|
| <b>E-field Emissions</b> |         |             |                       |                      |                        |                                |                                  |           |                   |                |                     |
| GSM1900                  | 661     | Acoustic    | 30.17                 | <b>25.90</b>         | 28.27                  | 3.63                           | <b>31.90</b>                     | <b>M3</b> | 35.0              | 3.10           | None                |

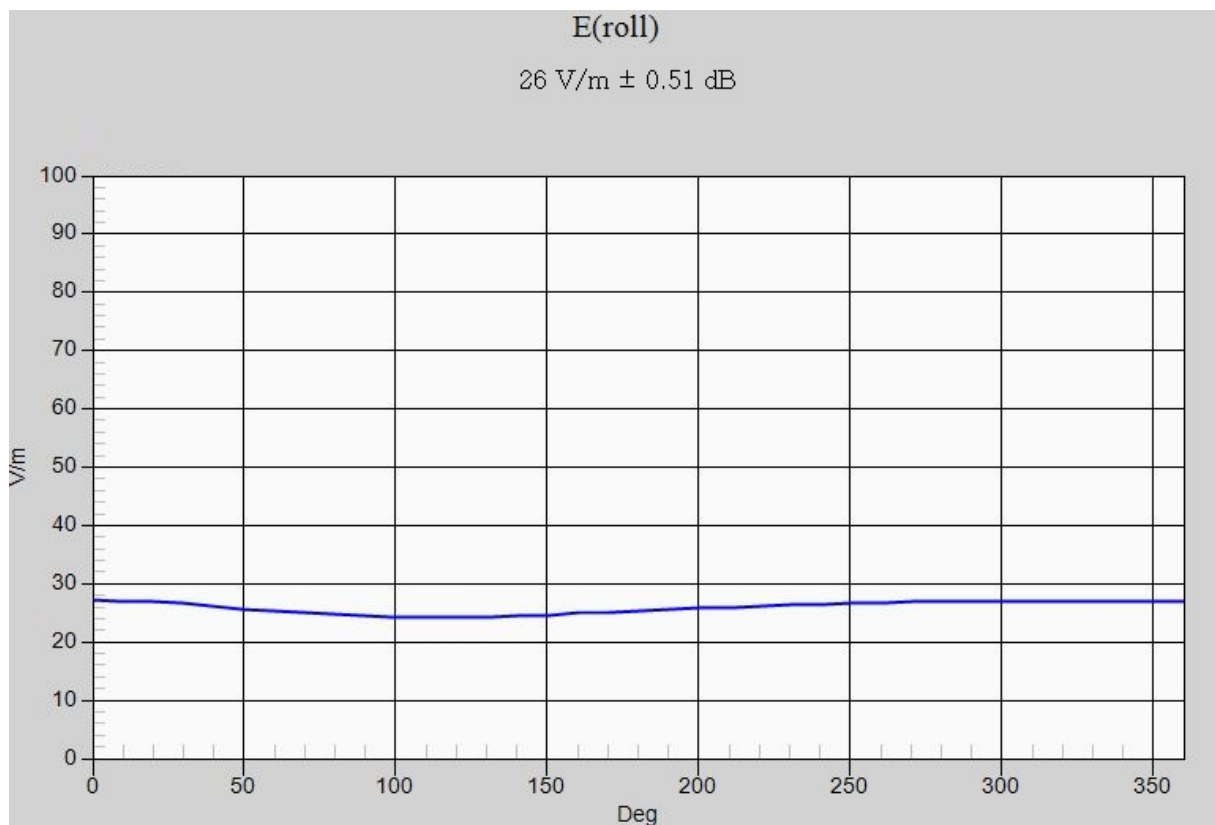


Figure 11-1 Worst-Case Probe Rotation about Azimuth axis

Note: Location of probe rotation is shown in APPENDIX E

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 23 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### 13. REFERENCES

- [1] ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York,NY, IEEE, June. 2011.
- [2] FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v04", October 31, 2013
- [3] FCC Office of Engineering and Technology KDB, "285076 D02 T-coil Testing for CMRS IP v01r01", October 31, 2013
- [4] FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6,2006
- [5] Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- [6] Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- [7] Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- [8] Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- [9] Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- [10] Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- [11] Crawford, M. L, and Workman, J. L, "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- [12] EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- [13] EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- [14] EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- [15] HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- [16] Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- [17] IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 24 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

[18] Joyner, K. H., et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.

[19] Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory Australian Hearing Series, Sydney, 1995.

[20] Keeker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.

[21] Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

[22] Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones, " Hearing Journal, 1997; 50:9, pp 32-34.

[23] Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp.17-43.

[24] Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.

[25] McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983

[26] Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.

[27] Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.

[28] Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60

[29] Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

[30] CTIA Test Plan for HAC Rev 3.0, November 2013

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 25 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## APPENDIX A

### Probe Modulation Factor

#### Measurement procedure

1. Modulated signal measurement: Connect the modulated signal with the correct frequency via the cable to the dipole.
2. Run the multimeter in the procedure with the corresponding modulation setting in continuous mode.
3. Adjust the signal amplitude to achieve the same field level display in the multimeter as during the WD field scan. Read the multimeter display and note it together with the probe ID, modulation type and frequency.
4. Read the peak envelope on the monitor in order to adjust the CW signal later to the same level.
5. Switch the signal source off and verify that the ambient and instrumentation noise level is at least 10dB lower.
6. CW measurement: Change the signal to CW at the same center frequency, without touching or moving the dipole or probe in the setup.
7. Adjust the CW signal amplitude to the same peak level on the monitor.
8. Run the multimeter in the CW procedure in continuous mode.
9. Read the multimeter display and note it together with the probe ID, modulation type and frequency.
10. Calculate the Probe Modulation Factor as the ratio between the CW multimeter field reading and the reading for the applicable modulation.
11. Perform the above setup and procedure for E-field and H-field probes.

#### Spectrum Analyzer setting.

1. Frequency Setting

ex) 835 MHz, 1880MHz, 2450 MHz

2. RBW/VBW/SPAN/Detector Setting.

|          | CW                         | GSM   | CDMA    | WCDMA   | AM 80% |
|----------|----------------------------|-------|---------|---------|--------|
| RBW      | Same with modulated signal | 1 MHz | 3 MHz   | 5 MHz   | 1 MHz  |
| VBW      | Same with modulated signal | 1 MHz | 3 MHz   | 5 MHz   | 1 MHz  |
| SPAN     | 0MHz                       | 0 MHz | 0 MHz   | 0 MHz   | 0 MHz  |
| DETECTOR | Same with modulated signal | Peak  | Average | Average | Peak   |

3. Trigger: Video or IF trigger, adjusted to give a stable display of the transmission
4. Sweep rate: Sufficiently rapid to permit the transmit pulse to be resolved accurately.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 26 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## APPENDIX B

### ANSI C63.19 (2011)- Telephone near-field categories.

| Category    | Telephone RF Parameters<br><960MHz |          |
|-------------|------------------------------------|----------|
| Near Field  | E-Field Emissions                  |          |
| Category M1 | 50 to 55                           | dB (V/m) |
| Category M2 | 45 to 50                           | dB (V/m) |
| Category M3 | 40 to 45                           | dB (V/m) |
| Category M4 | <40                                | dB (V/m) |
| Category    | Telephone RF Parameters<br>>960MHz |          |
| Near Field  | E-Field Emissions                  |          |
| Category M1 | 40 to 45                           | dB (V/m) |
| Category M2 | 35 to 40                           | dB (V/m) |
| Category M3 | 30 to 35                           | dB (V/m) |
| Category M4 | <30                                | dB (V/m) |

Table B.1 Telephone near-field categories in dB units.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 27 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## APPENDIX C

### The Validation Measurements

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 28 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

**DUT: CD835V3; Type: CD835V3; Serial: 1105**

Communication System: UID 0, CW (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 835 MHz; MIF: 0 dB

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2453; ConvF(1, 1, 1); Calibrated: 2015-05-08;
- Sensor-Surface: 0mm (Fix Surface), z = 9.7
- Electronics: DAE4 Sn1241; Calibrated: 2015-01-21
- Phantom: HAC Test Arch\_2013\_07\_30; Type: SD HAC P01 BA; Serial: 1078
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**835MHz E-Field Validation @ 100mW (2015.06.08)/E Scan 15mm above Dipole/Hearing Aid**


**Compatibility Test (41x361x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 111.5 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

Average value of Peak (interpolated) = 113.58 V/m

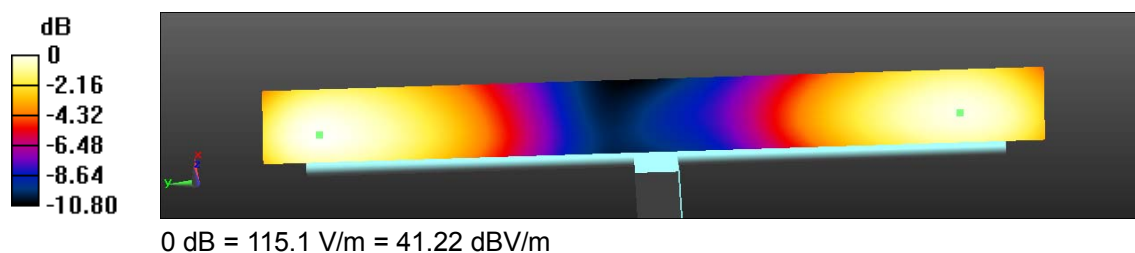

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 29 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

**DUT: CD1880V3; Type: CD1880V3; Serial: 1016**

Communication System: UID 0, CW (0); Communication System Band: Exported from older format (data unavailable - please correct).; Frequency: 1880 MHz; MIF: 0 dB

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2453; ConvF(1, 1, 1); Calibrated: 2015-05-08;
- Sensor-Surface: 0mm (Fix Surface), z = 9.7
- Electronics: DAE4 Sn1241; Calibrated: 2015-01-21
- Phantom: HAC Test Arch\_2013\_07\_30; Type: SD HAC P01 BA; Serial: 1078
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


**1880MHz E-Field Validation @ 100mW (2015.06.09)/E Scan 15mm above Dipole/Hearing Aid Compatibility Test (41x181x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 152.9 V/m; Power Drift = 0.03 dB

Applied MIF = 0.00 dB

Average value of Peak (interpolated) = 90.22 V/m

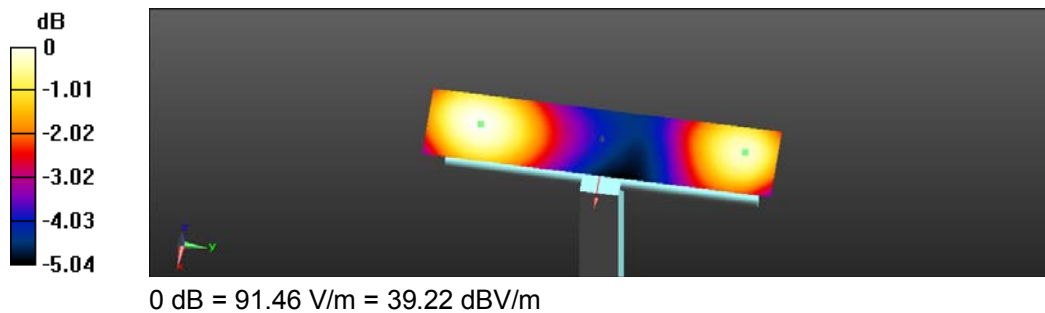

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 30 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## APPENDIX D

### Plots of The HAC Measurements

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 31 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## E-field (GSM850\_1900) -2011

**DUT: SM-J500M/DS; Type: Mobile Phone; Serial: AM-049-A**

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 824.2 MHz; Duty Cycle: 1:8.6896

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2453; ConvF(1, 1, 1); Calibrated: 2015-05-08;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1241; Calibrated: 2015-01-21
- Phantom: HAC Test Arch\_2013\_07\_30; Type: SD HAC P01 BA; Serial: 1078
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**GSM E-Field Test SM-J500M\_DS (Job No\_AM-049)/Ch.0128, Ant, Intenna, Bat. Standard/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 51.78 V/m; Power Drift = -0.06 dB

Applied MIF = 3.63 dB

RF audio interference level = 36.63 dBV/m

**Emission category: M4**

MIF scaled E-field

|                                        |                                        |                                        |
|----------------------------------------|----------------------------------------|----------------------------------------|
| Grid 1 <b>M4</b><br><b>34.55 dBV/m</b> | Grid 2 <b>M4</b><br><b>34.62 dBV/m</b> | Grid 3 <b>M4</b><br><b>33.75 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>34.94 dBV/m</b> | Grid 5 <b>M4</b><br><b>34.95 dBV/m</b> | Grid 6 <b>M4</b><br><b>33.72 dBV/m</b> |
| Grid 7 <b>M4</b><br><b>36.63 dBV/m</b> | Grid 8 <b>M4</b><br><b>36.63 dBV/m</b> | Grid 9 <b>M4</b><br><b>34.43 dBV/m</b> |

**Cursor:**

Total = 36.63 dBV/m

E Category: M4

Location: -8.5, -25, 8.7 mm



0 dB = 67.83 V/m = 36.63 dBV/m

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 32 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## E-field (GSM850\_1900) -2011

DUT: SM-J500M/DS; Type: Mobile Phone; Serial: AM-049-A

Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz; Duty Cycle: 1:8.6896

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

DASY5 Configuration:

- Probe: ER3DV6 - SN2453; ConvF(1, 1, 1); Calibrated: 2015-05-08;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1241; Calibrated: 2015-01-21
- Phantom: HAC Test Arch\_2013\_07\_30; Type: SD HAC P01 BA; Serial: 1078
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**GSM E-Field Test SM-J500M\_DS (Job No\_AM-049)/Ch.0661, Ant. Intenna, Bat. Standard/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.11 V/m; Power Drift = 0.03 dB

Applied MIF = 3.63 dB

RF audio interference level = 31.68 dBV/m

**Emission category: M3**

MIF scaled E-field

|                                        |                                        |                                        |
|----------------------------------------|----------------------------------------|----------------------------------------|
| Grid 1 <b>M4</b><br><b>26.09 dBV/m</b> | Grid 2 <b>M4</b><br><b>25.72 dBV/m</b> | Grid 3 <b>M4</b><br><b>24.19 dBV/m</b> |
| Grid 4 <b>M4</b><br><b>29.88 dBV/m</b> | Grid 5 <b>M4</b><br><b>29.88 dBV/m</b> | Grid 6 <b>M4</b><br><b>27.12 dBV/m</b> |
| Grid 7 <b>M3</b><br><b>31.5 dBV/m</b>  | Grid 8 <b>M3</b><br><b>31.68 dBV/m</b> | Grid 9 <b>M3</b><br><b>30.73 dBV/m</b> |

**Cursor:**

Total = 31.68 dBV/m

E Category: M3

Location: -3.5, -25, 8.7 mm



0 dB = 38.36 V/m = 31.68 dBV/m

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 33 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## APPENDIX E

### Probe Calibration(E-field)

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 34 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **SPEAG Replacement**

Certificate No: **ER3-2453\_May15**

## CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2453**

Calibration procedure(s) **QA CAL-02.v8, QA CAL-25.v6  
Calibration procedure for E-field probes optimized for close near field  
evaluations in air**

Calibration date: **May 8, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 01-Apr-15 (No. 217-02128)         | Mar-16                 |
| Power sensor E4412A        | MY41498087      | 01-Apr-15 (No. 217-02128)         | Mar-16                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 01-Apr-15 (No. 217-02129)         | Mar-16                 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 01-Apr-15 (No. 217-02132)         | Mar-16                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 01-Apr-15 (No. 217-02133)         | Mar-16                 |
| Reference Probe ER3DV6     | SN: 2328        | 08-Oct-14 (No. ER3-2328_Oct14)    | Oct-15                 |
| DAE4                       | SN: 789         | 16-Mar-15 (No. DAE4-789_Mar15)    | Mar-16                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Apr-13)  | In house check: Apr-16 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |

|                                                                                                                 | Name           | Function              | Signature |
|-----------------------------------------------------------------------------------------------------------------|----------------|-----------------------|-----------|
| Calibrated by:                                                                                                  | Jeton Kastrati | Laboratory Technician |           |
| Approved by:                                                                                                    | Katja Pokovic  | Technical Manager     |           |
| Issued: May 8, 2015                                                                                             |                |                       |           |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                |                       |           |

*o.k. to use*  
  
2016.5.26

Certificate No: **ER3-2453\_May15**

Page 1 of 25

|                                 |                          |                  |              |            |
|---------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M               | Report Number: AM-049-M1 |                  | Page :       | 35 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 0108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1309-2005, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005
- CTIA Test Plan for Hearing Aid Compatibility, April 2010.

#### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- NORM( $f$ )<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart).
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

|                                 |                          |                  |              |            |
|---------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M               | Report Number: AM-049-M1 |                  | Page :       | 36 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

# Probe ER3DV6

## SN:2453

Manufactured: December 30, 2008  
Calibrated: May 8, 2015

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 37 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## DASY/EASY - Parameters of Probe: ER3DV6 - SN:2453

### Basic Calibration Parameters

|                                              | Sensor X | Sensor Y | Sensor Z | Unc (k=2)    |
|----------------------------------------------|----------|----------|----------|--------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) | 1.56     | 1.57     | 2.03     | $\pm 10.1\%$ |
| DCP (mV) <sup>B</sup>                        | 96.2     | 100.6    | 99.4     |              |

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms.V}^{-2}$ | T2<br>$\text{ms.V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|-------|
| X | 97.59    | 472.1    | 36.52                       | 28.54                    | 2.181                    | 5.1      | 0                     | 0.726                 | 1.021 |
| Y | 88.86    | 420.2    | 35.42                       | 25.9                     | 1.411                    | 5.1      | 0                     | 0.6                   | 1.013 |
| Z | 83.93    | 399.8    | 35.5                        | 29.76                    | 3.301                    | 5.1      | 0.459                 | 0.72                  | 1.014 |


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 38 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

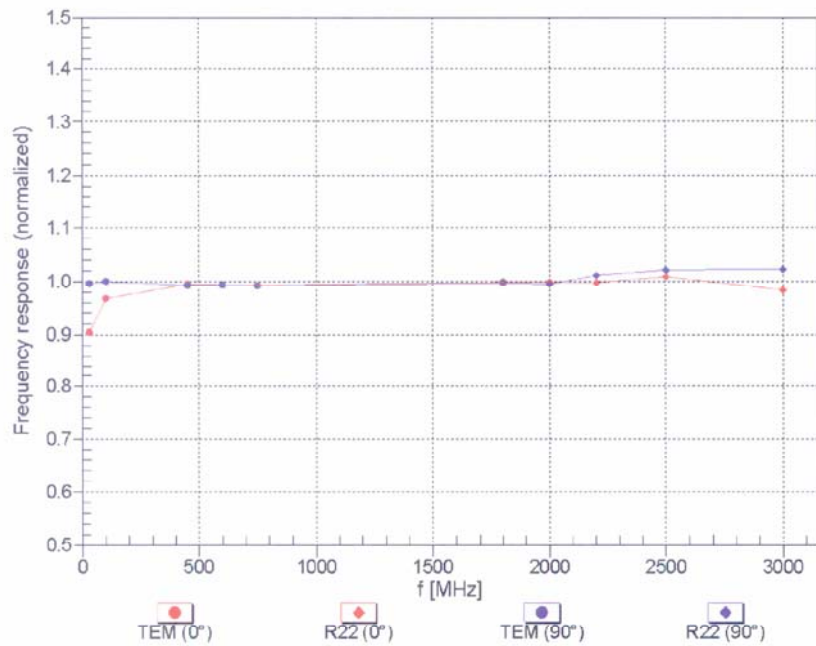


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 39 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

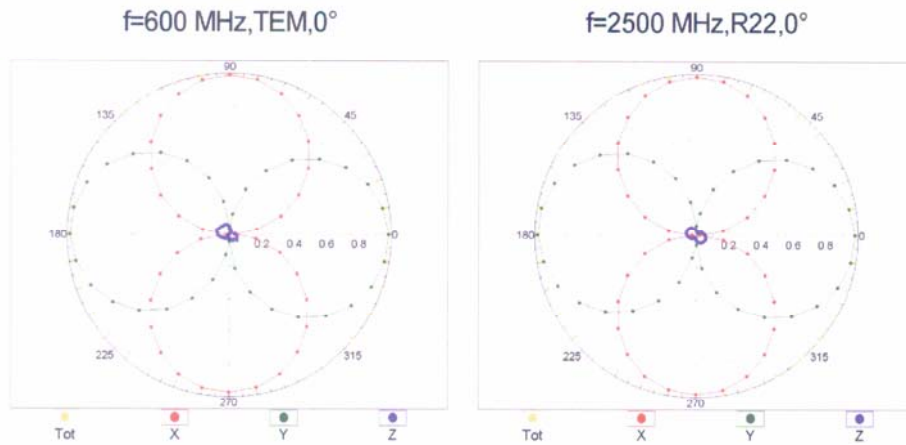


### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$

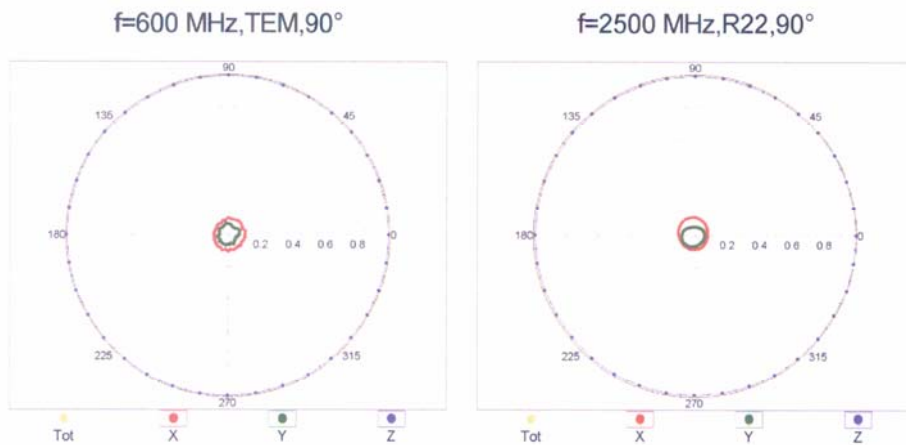


|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 40 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

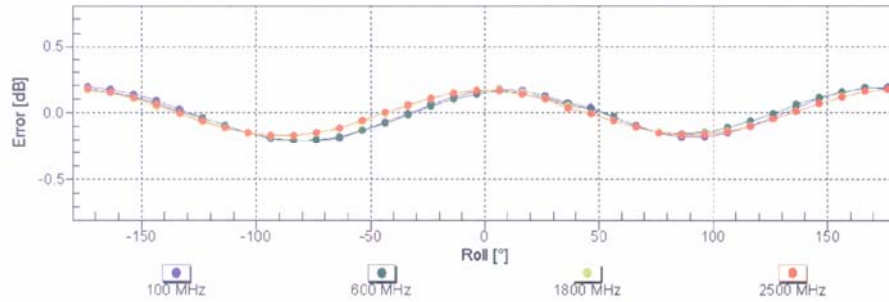

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$


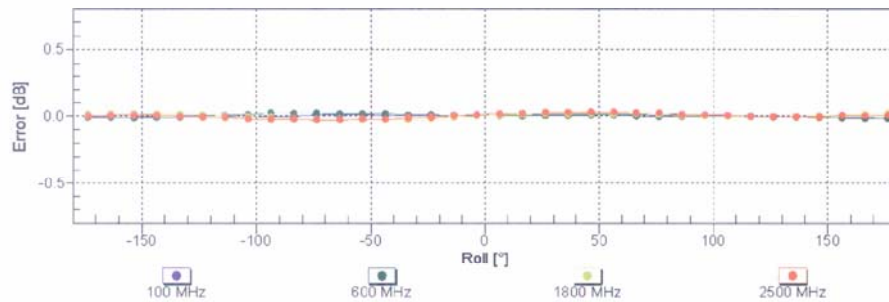


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 41 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### Dynamic Range f(E-field)


(TEM cell , f = 900 MHz)

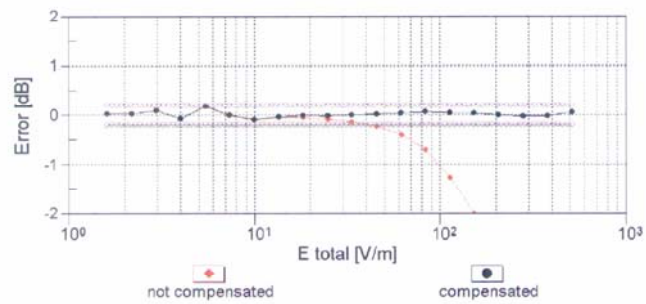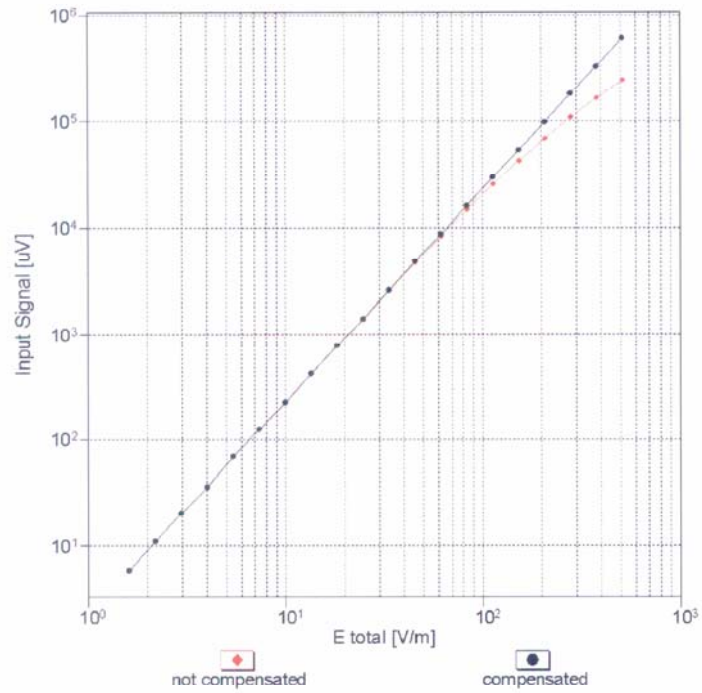

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 42 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

Deviation from Isotropy in Air  
Error ( $\phi, \vartheta$ ),  $f = 900 \text{ MHz}$

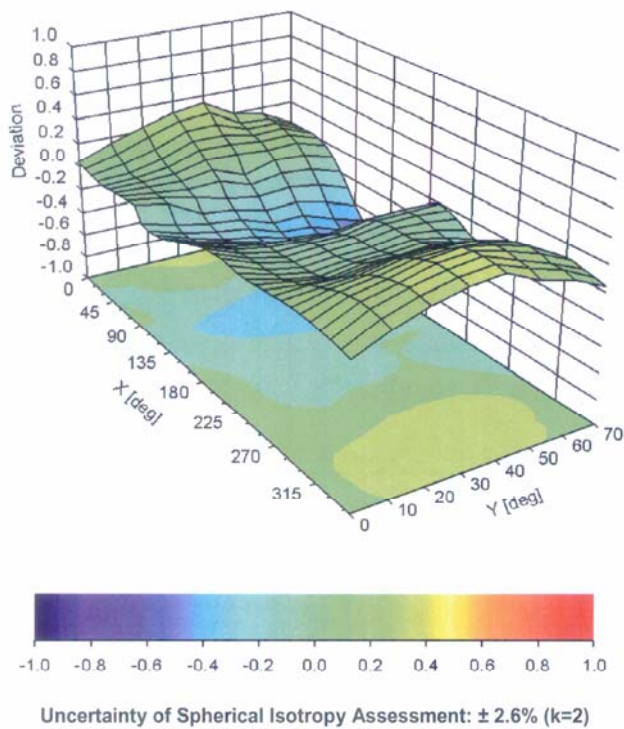

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 43 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## DASY/EASY - Parameters of Probe: ER3DV6 - SN:2453

### Other Probe Parameters

|                                         |             |
|-----------------------------------------|-------------|
| Sensor Arrangement                      | Rectangular |
| Connector Angle (°)                     | 46.4        |
| Mechanical Surface Detection Mode       | enabled     |
| Optical Surface Detection Mode          | disabled    |
| Probe Overall Length                    | 337 mm      |
| Probe Body Diameter                     | 10 mm       |
| Tip Length                              | 10 mm       |
| Tip Diameter                            | 8 mm        |
| Probe Tip to Sensor X Calibration Point | 2.5 mm      |
| Probe Tip to Sensor Y Calibration Point | 2.5 mm      |
| Probe Tip to Sensor Z Calibration Point | 2.5 mm      |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 44 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\mu$ V | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|-----------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00            | 1.00  | 0.00    | 155.4    | $\pm 4.6\%$                      |
|               |                                               | Y | 0.00    | 0.00            | 1.00  |         | 148.4    |                                  |
|               |                                               | Z | 0.00    | 0.00            | 1.00  |         | 157.1    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 9.38    | 82.39           | 20.07 | 10.00   | 30.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 9.40    | 82.77           | 19.36 |         | 30.0     |                                  |
|               |                                               | Z | 9.12    | 80.79           | 20.13 |         | 30.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 1.25    | 67.18           | 14.07 | 0.00    | 150.0    | $\pm 9.6\%$                      |
|               |                                               | Y | 1.28    | 68.45           | 15.05 |         | 150.0    |                                  |
|               |                                               | Z | 1.14    | 66.02           | 12.95 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.54    | 66.45           | 15.76 | 0.41    | 150.0    | $\pm 9.6\%$                      |
|               |                                               | Y | 1.52    | 67.03           | 16.37 |         | 150.0    |                                  |
|               |                                               | Z | 1.50    | 65.81           | 14.90 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.86    | 69.73           | 18.88 | 1.46    | 150.0    | $\pm 9.6\%$                      |
|               |                                               | Y | 5.74    | 69.72           | 18.86 |         | 150.0    |                                  |
|               |                                               | Z | 5.81    | 69.69           | 18.55 |         | 150.0    |                                  |
| 10021-<br>DAB | GSM-FDD (TDMA, GMSK)                          | X | 13.60   | 89.57           | 24.16 | 9.39    | 50.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 18.93   | 95.37           | 25.29 |         | 50.0     |                                  |
|               |                                               | Z | 11.32   | 85.31           | 23.31 |         | 50.0     |                                  |
| 10023-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 13.43   | 89.28           | 24.12 | 9.57    | 50.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 18.15   | 94.62           | 25.10 |         | 50.0     |                                  |
|               |                                               | Z | 11.28   | 85.13           | 23.30 |         | 50.0     |                                  |
| 10024-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 13.41   | 89.86           | 22.75 | 6.56    | 60.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 24.14   | 98.72           | 24.85 |         | 60.0     |                                  |
|               |                                               | Z | 9.85    | 84.23           | 21.32 |         | 60.0     |                                  |
| 10025-<br>DAB | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 100.00  | 163.97          | 59.99 | 12.57   | 50.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 100.00  | 165.77          | 60.38 |         | 50.0     |                                  |
|               |                                               | Z | 26.67   | 115.73          | 44.01 |         | 50.0     |                                  |
| 10026-<br>DAB | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 44.76   | 127.65          | 44.35 | 9.56    | 60.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 100.00  | 151.09          | 51.01 |         | 60.0     |                                  |
|               |                                               | Z | 21.62   | 105.23          | 36.38 |         | 60.0     |                                  |
| 10027-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 13.48   | 90.71           | 22.06 | 4.80    | 80.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 37.67   | 104.89          | 25.59 |         | 80.0     |                                  |
|               |                                               | Z | 8.59    | 83.51           | 20.05 |         | 80.0     |                                  |
| 10028-<br>DAB | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 12.91   | 91.11           | 21.44 | 3.55    | 100.0    | $\pm 9.6\%$                      |
|               |                                               | Y | 72.03   | 113.39          | 26.92 |         | 100.0    |                                  |
|               |                                               | Z | 7.13    | 82.39           | 18.87 |         | 100.0    |                                  |
| 10029-<br>DAB | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 27.15   | 113.99          | 38.84 | 7.80    | 80.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 40.96   | 126.08          | 42.69 |         | 80.0     |                                  |
|               |                                               | Z | 16.24   | 98.54           | 32.88 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 12.12   | 88.51           | 21.60 | 5.30    | 70.0     | $\pm 9.6\%$                      |
|               |                                               | Y | 23.12   | 97.71           | 23.85 |         | 70.0     |                                  |
|               |                                               | Z | 8.62    | 82.72           | 20.02 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 5.36    | 82.72           | 17.53 | 1.88    | 100.0    | $\pm 9.6\%$                      |
|               |                                               | Y | 30.50   | 103.28          | 23.04 |         | 100.0    |                                  |
|               |                                               | Z | 3.21    | 75.70           | 15.09 |         | 100.0    |                                  |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 45 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                     |   |       |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|-------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 2.68  | 77.90  | 15.38 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 15.29 | 98.03  | 21.23 |       | 100.0 |         |
|           |                                                     | Z | 1.74  | 72.08  | 13.04 |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 12.34 | 91.91  | 25.53 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 18.68 | 100.19 | 28.00 |       | 70.0  |         |
|           |                                                     | Z | 8.82  | 83.92  | 22.32 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 4.21  | 78.21  | 19.03 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.89  | 81.62  | 20.32 |       | 100.0 |         |
|           |                                                     | Z | 3.72  | 74.87  | 17.03 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 2.97  | 74.46  | 17.21 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 3.24  | 76.89  | 18.24 |       | 100.0 |         |
|           |                                                     | Z | 2.73  | 72.15  | 15.51 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 13.12 | 93.07  | 25.95 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 20.99 | 102.34 | 28.69 |       | 70.0  |         |
|           |                                                     | Z | 9.14  | 84.61  | 22.61 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 4.23  | 78.35  | 19.04 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.94  | 81.82  | 20.35 |       | 100.0 |         |
|           |                                                     | Z | 3.71  | 74.89  | 17.01 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 3.02  | 74.88  | 17.44 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 3.33  | 77.47  | 18.54 |       | 100.0 |         |
|           |                                                     | Z | 2.77  | 72.45  | 15.69 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 1.83  | 68.51  | 14.20 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.86  | 69.81  | 14.88 |       | 150.0 |         |
|           |                                                     | Z | 1.63  | 67.40  | 12.94 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 12.08 | 87.34  | 21.97 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 16.73 | 92.43  | 22.96 |       | 50.0  |         |
|           |                                                     | Z | 9.98  | 83.38  | 21.11 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.05  | 61.40  | 6.78  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.03  | 62.64  | 9.19  |       | 150.0 |         |
|           |                                                     | Z | 0.04  | 65.47  | 0.43  |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 17.40 | 93.12  | 27.41 | 13.80 | 20.0  | ± 9.6 % |
|           |                                                     | Y | 25.50 | 100.43 | 28.73 |       | 20.0  |         |
|           |                                                     | Z | 12.45 | 85.02  | 25.30 |       | 20.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 12.91 | 88.21  | 24.20 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 15.69 | 91.98  | 24.63 |       | 40.0  |         |
|           |                                                     | Z | 11.45 | 84.79  | 23.67 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 13.91 | 90.75  | 26.14 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 17.77 | 96.31  | 27.64 |       | 50.0  |         |
|           |                                                     | Z | 11.57 | 85.32  | 24.11 |       | 50.0  |         |
| 10058-DAB | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 18.14 | 104.24 | 34.79 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 22.25 | 110.73 | 37.10 |       | 100.0 |         |
|           |                                                     | Z | 12.72 | 93.55  | 30.30 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.74  | 68.51  | 16.72 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.73  | 69.37  | 17.48 |       | 110.0 |         |
|           |                                                     | Z | 1.70  | 67.59  | 15.72 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 4.42  | 83.12  | 20.06 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 9.36  | 95.75  | 24.40 |       | 110.0 |         |
|           |                                                     | Z | 3.12  | 76.77  | 17.28 |       | 110.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 46 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 5.94 | 85.76 | 23.05 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 8.53 | 93.63 | 26.00 |      | 110.0 |         |
|           |                                                | Z | 4.68 | 80.06 | 20.41 |      | 110.0 |         |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 5.55 | 69.23 | 17.94 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.46 | 69.31 | 17.98 |      | 100.0 |         |
|           |                                                | Z | 5.44 | 69.09 | 17.58 |      | 100.0 |         |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 5.60 | 69.45 | 18.12 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.51 | 69.52 | 18.15 |      | 100.0 |         |
|           |                                                | Z | 5.51 | 69.33 | 17.77 |      | 100.0 |         |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 6.03 | 70.03 | 18.54 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.92 | 70.07 | 18.56 |      | 100.0 |         |
|           |                                                | Z | 5.91 | 69.88 | 18.18 |      | 100.0 |         |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 5.90 | 70.05 | 18.70 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.79 | 70.07 | 18.72 |      | 100.0 |         |
|           |                                                | Z | 5.82 | 69.98 | 18.38 |      | 100.0 |         |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 5.98 | 70.30 | 19.02 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.85 | 70.28 | 19.01 |      | 100.0 |         |
|           |                                                | Z | 5.92 | 70.25 | 18.69 |      | 100.0 |         |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 6.39 | 70.85 | 19.79 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 6.23 | 70.72 | 19.70 |      | 100.0 |         |
|           |                                                | Z | 6.32 | 70.76 | 19.40 |      | 100.0 |         |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 6.57 | 71.39 | 20.28 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 6.39 | 71.23 | 20.18 |      | 100.0 |         |
|           |                                                | Z | 6.54 | 71.37 | 19.92 |      | 100.0 |         |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 6.65 | 71.35 | 20.53 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 6.47 | 71.20 | 20.41 |      | 100.0 |         |
|           |                                                | Z | 6.63 | 71.38 | 20.17 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 6.02 | 70.09 | 19.38 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.89 | 70.03 | 19.33 |      | 100.0 |         |
|           |                                                | Z | 6.00 | 70.12 | 19.06 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 6.11 | 70.70 | 19.71 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.97 | 70.64 | 19.67 |      | 100.0 |         |
|           |                                                | Z | 6.12 | 70.80 | 19.42 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 6.28 | 71.25 | 20.28 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 6.11 | 71.11 | 20.20 |      | 100.0 |         |
|           |                                                | Z | 6.33 | 71.40 | 20.00 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 6.33 | 71.54 | 20.71 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 6.13 | 71.31 | 20.58 |      | 100.0 |         |
|           |                                                | Z | 6.42 | 71.71 | 20.40 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 6.59 | 72.53 | 21.52 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 6.35 | 72.17 | 21.33 |      | 90.0  |         |
|           |                                                | Z | 6.71 | 72.65 | 21.16 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 6.57 | 72.34 | 21.71 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 6.31 | 71.92 | 21.47 |      | 90.0  |         |
|           |                                                | Z | 6.72 | 72.54 | 21.37 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 6.60 | 72.44 | 21.84 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 6.34 | 72.00 | 21.58 |      | 90.0  |         |
|           |                                                | Z | 6.78 | 72.67 | 21.50 |      | 90.0  |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 47 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 1.14   | 66.25  | 12.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.13   | 67.26  | 13.20 |      | 150.0 |         |
|           |                                                     | Z | 1.00   | 65.17  | 11.26 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 3.49   | 69.22  | 11.11 | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 3.09   | 68.38  | 10.16 |      | 80.0  |         |
|           |                                                     | Z | 3.83   | 69.57  | 11.76 |      | 80.0  |         |
| 10090-DAB | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 13.32  | 89.75  | 22.74 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 23.75  | 98.50  | 24.82 |      | 60.0  |         |
|           |                                                     | Z | 9.84   | 84.20  | 21.34 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 2.04   | 67.35  | 15.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.05   | 68.08  | 15.58 |      | 150.0 |         |
|           |                                                     | Z | 1.93   | 66.69  | 14.25 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 2.01   | 67.34  | 15.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.01   | 68.08  | 15.55 |      | 150.0 |         |
|           |                                                     | Z | 1.90   | 66.66  | 14.20 |      | 150.0 |         |
| 10099-DAB | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 44.05  | 127.18 | 44.21 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 151.07 | 51.01 |      | 60.0  |         |
|           |                                                     | Z | 21.48  | 105.02 | 36.31 |      | 60.0  |         |
| 10100-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.42   | 70.07  | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.43   | 70.73  | 16.48 |      | 150.0 |         |
|           |                                                     | Z | 3.24   | 69.40  | 15.44 |      | 150.0 |         |
| 10101-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.83   | 69.18  | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.79   | 69.49  | 16.67 |      | 150.0 |         |
|           |                                                     | Z | 3.66   | 68.65  | 15.89 |      | 150.0 |         |
| 10102-CAB | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.93   | 69.10  | 16.51 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.89   | 69.40  | 16.75 |      | 150.0 |         |
|           |                                                     | Z | 3.77   | 68.62  | 16.02 |      | 150.0 |         |
| 10103-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 8.05   | 76.62  | 20.53 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.02   | 77.54  | 20.98 |      | 65.0  |         |
|           |                                                     | Z | 7.21   | 74.01  | 19.20 |      | 65.0  |         |
| 10104-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 10.86  | 82.09  | 24.04 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 10.92  | 83.06  | 24.45 |      | 65.0  |         |
|           |                                                     | Z | 10.32  | 80.22  | 22.94 |      | 65.0  |         |
| 10105-CAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 7.69   | 74.60  | 20.92 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 7.97   | 76.26  | 21.74 |      | 65.0  |         |
|           |                                                     | Z | 7.42   | 73.15  | 19.93 |      | 65.0  |         |
| 10108-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 3.15   | 69.84  | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.15   | 70.53  | 16.56 |      | 150.0 |         |
|           |                                                     | Z | 2.96   | 69.12  | 15.43 |      | 150.0 |         |
| 10109-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 3.49   | 69.00  | 16.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.45   | 69.37  | 16.60 |      | 150.0 |         |
|           |                                                     | Z | 3.31   | 68.42  | 15.73 |      | 150.0 |         |
| 10110-CAC | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.70   | 69.35  | 15.90 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.69   | 70.09  | 16.43 |      | 150.0 |         |
|           |                                                     | Z | 2.49   | 68.50  | 15.13 |      | 150.0 |         |
| 10111-CAC | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 3.05   | 68.68  | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.02   | 69.18  | 16.42 |      | 150.0 |         |
|           |                                                     | Z | 2.87   | 68.11  | 15.42 |      | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 48 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAC | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 3.61 | 68.91 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.57 | 69.26 | 16.63 |      | 150.0 |         |
|           |                                                | Z | 3.44 | 68.40 | 15.82 |      | 150.0 |         |
| 10113-CAC | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 3.22 | 68.80 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.18 | 69.27 | 16.56 |      | 150.0 |         |
|           |                                                | Z | 3.04 | 68.27 | 15.60 |      | 150.0 |         |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.46 | 67.51 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.40 | 67.63 | 16.50 |      | 150.0 |         |
|           |                                                | Z | 5.29 | 67.15 | 16.01 |      | 150.0 |         |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.91 | 68.07 | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.82 | 68.13 | 16.79 |      | 150.0 |         |
|           |                                                | Z | 5.72 | 67.70 | 16.33 |      | 150.0 |         |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.60 | 67.79 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.55 | 67.96 | 16.60 |      | 150.0 |         |
|           |                                                | Z | 5.44 | 67.48 | 16.11 |      | 150.0 |         |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.47 | 67.56 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.41 | 67.69 | 16.56 |      | 150.0 |         |
|           |                                                | Z | 5.30 | 67.18 | 16.04 |      | 150.0 |         |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.93 | 68.03 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.85 | 68.13 | 16.79 |      | 150.0 |         |
|           |                                                | Z | 5.74 | 67.71 | 16.34 |      | 150.0 |         |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.61 | 67.87 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.54 | 68.01 | 16.64 |      | 150.0 |         |
|           |                                                | Z | 5.43 | 67.50 | 16.13 |      | 150.0 |         |
| 10140-CAB | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.98 | 69.09 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.94 | 69.39 | 16.68 |      | 150.0 |         |
|           |                                                | Z | 3.82 | 68.63 | 15.96 |      | 150.0 |         |
| 10141-CAB | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 4.10 | 69.12 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 4.06 | 69.41 | 16.82 |      | 150.0 |         |
|           |                                                | Z | 3.94 | 68.69 | 16.13 |      | 150.0 |         |
| 10142-CAC | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 2.44 | 69.01 | 15.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.43 | 69.81 | 16.08 |      | 150.0 |         |
|           |                                                | Z | 2.23 | 68.10 | 14.65 |      | 150.0 |         |
| 10143-CAC | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.84 | 68.67 | 15.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.81 | 69.26 | 15.98 |      | 150.0 |         |
|           |                                                | Z | 2.65 | 68.03 | 14.83 |      | 150.0 |         |
| 10144-CAC | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.83 | 68.04 | 15.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.79 | 68.49 | 15.25 |      | 150.0 |         |
|           |                                                | Z | 2.64 | 67.40 | 14.19 |      | 150.0 |         |
| 10145-CAC | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 1.76 | 67.12 | 13.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.72 | 67.71 | 13.61 |      | 150.0 |         |
|           |                                                | Z | 1.56 | 66.00 | 12.01 |      | 150.0 |         |
| 10146-CAC | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 3.37 | 71.93 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.97 | 70.80 | 15.08 |      | 150.0 |         |
|           |                                                | Z | 3.08 | 70.20 | 14.16 |      | 150.0 |         |
| 10147-CAC | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 3.54 | 72.68 | 16.70 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.14 | 71.56 | 15.58 |      | 150.0 |         |
|           |                                                | Z | 3.23 | 70.86 | 14.60 |      | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 49 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                            |   |        |        |       |      |       |         |
|-----------|--------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10149-CAB | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 3.49   | 69.02  | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.46   | 69.39  | 16.62 |      | 150.0 |         |
|           |                                            | Z | 3.32   | 68.45  | 15.75 |      | 150.0 |         |
| 10150-CAB | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 3.61   | 68.93  | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.57   | 69.28  | 16.66 |      | 150.0 |         |
|           |                                            | Z | 3.44   | 68.42  | 15.84 |      | 150.0 |         |
| 10151-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 9.78   | 81.51  | 22.67 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 10.17  | 83.26  | 23.39 |      | 65.0  |         |
|           |                                            | Z | 9.35   | 79.94  | 21.79 |      | 65.0  |         |
| 10152-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 10.20  | 81.69  | 23.61 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 10.34  | 82.86  | 24.08 |      | 65.0  |         |
|           |                                            | Z | 9.70   | 79.83  | 22.47 |      | 65.0  |         |
| 10153-CAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 10.43  | 82.06  | 24.09 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 10.57  | 83.27  | 24.58 |      | 65.0  |         |
|           |                                            | Z | 9.95   | 80.25  | 22.96 |      | 65.0  |         |
| 10154-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.71   | 69.49  | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.71   | 70.26  | 16.55 |      | 150.0 |         |
|           |                                            | Z | 2.51   | 68.64  | 15.24 |      | 150.0 |         |
| 10155-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 3.05   | 68.68  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.02   | 69.18  | 16.43 |      | 150.0 |         |
|           |                                            | Z | 2.88   | 68.11  | 15.42 |      | 150.0 |         |
| 10156-CAC | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 2.28   | 69.00  | 15.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.27   | 69.86  | 15.92 |      | 150.0 |         |
|           |                                            | Z | 2.06   | 67.96  | 14.35 |      | 150.0 |         |
| 10157-CAC | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 8.90   | 87.11  | 22.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 7.01   | 84.12  | 21.34 |      | 150.0 |         |
|           |                                            | Z | 4.90   | 77.71  | 18.27 |      | 150.0 |         |
| 10158-CAC | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 3.22   | 68.81  | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.18   | 69.28  | 16.57 |      | 150.0 |         |
|           |                                            | Z | 3.04   | 68.28  | 15.62 |      | 150.0 |         |
| 10159-CAC | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.67   | 68.20  | 14.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.64   | 68.77  | 15.24 |      | 150.0 |         |
|           |                                            | Z | 2.47   | 67.53  | 14.06 |      | 150.0 |         |
| 10160-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 666.28 | 154.50 | 39.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 383.24 | 147.46 | 38.85 |      | 150.0 |         |
|           |                                            | Z | 66.86  | 117.15 | 31.30 |      | 150.0 |         |
| 10161-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 3.47   | 68.68  | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.43   | 69.05  | 16.53 |      | 150.0 |         |
|           |                                            | Z | 3.31   | 68.19  | 15.69 |      | 150.0 |         |
| 10162-CAB | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 3.57   | 68.69  | 16.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.54   | 69.07  | 16.59 |      | 150.0 |         |
|           |                                            | Z | 3.41   | 68.26  | 15.78 |      | 150.0 |         |
| 10166-CAC | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 4.80   | 73.28  | 21.28 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.50   | 72.83  | 20.86 |      | 150.0 |         |
|           |                                            | Z | 4.74   | 73.28  | 20.64 |      | 150.0 |         |
| 10167-CAC | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 6.24   | 76.72  | 21.95 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.77   | 76.13  | 21.46 |      | 150.0 |         |
|           |                                            | Z | 6.36   | 77.07  | 21.40 |      | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 50 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                            |   |       |        |       |      |       |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10168-CAC | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.47  | 77.52  | 22.50 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 6.01  | 77.04  | 22.07 |      | 150.0 |         |
|           |                                            | Z | 6.67  | 78.14  | 22.09 |      | 150.0 |         |
| 10169-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 4.94  | 76.92  | 22.84 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.39  | 75.60  | 22.10 |      | 150.0 |         |
|           |                                            | Z | 4.87  | 76.31  | 21.82 |      | 150.0 |         |
| 10170-CAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 6.81  | 81.94  | 24.30 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 6.01  | 80.74  | 23.68 |      | 150.0 |         |
|           |                                            | Z | 6.91  | 81.51  | 23.35 |      | 150.0 |         |
| 10171-AAB | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 6.17  | 79.55  | 22.64 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.39  | 78.19  | 21.89 |      | 150.0 |         |
|           |                                            | Z | 6.13  | 78.69  | 21.49 |      | 150.0 |         |
| 10172-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 31.42 | 112.25 | 35.33 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 41.96 | 119.38 | 37.06 |      | 65.0  |         |
|           |                                            | Z | 18.53 | 98.59  | 30.10 |      | 65.0  |         |
| 10173-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 23.99 | 101.83 | 30.48 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 30.70 | 107.58 | 31.87 |      | 65.0  |         |
|           |                                            | Z | 19.40 | 95.69  | 27.75 |      | 65.0  |         |
| 10174-CAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 20.88 | 98.15  | 28.94 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 25.72 | 103.02 | 30.07 |      | 65.0  |         |
|           |                                            | Z | 15.59 | 90.84  | 25.78 |      | 65.0  |         |
| 10175-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 6.28  | 82.21  | 25.11 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.27  | 79.55  | 23.82 |      | 150.0 |         |
|           |                                            | Z | 5.73  | 79.59  | 23.17 |      | 150.0 |         |
| 10176-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 6.79  | 81.88  | 24.28 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 6.00  | 80.70  | 23.66 |      | 150.0 |         |
|           |                                            | Z | 6.91  | 81.48  | 23.34 |      | 150.0 |         |
| 10177-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 4.92  | 76.76  | 22.71 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.37  | 75.44  | 21.96 |      | 150.0 |         |
|           |                                            | Z | 4.85  | 76.15  | 21.68 |      | 150.0 |         |
| 10178-CAC | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 6.73  | 81.69  | 24.19 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.94  | 80.51  | 23.57 |      | 150.0 |         |
|           |                                            | Z | 6.84  | 81.29  | 23.25 |      | 150.0 |         |
| 10179-CAC | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 6.43  | 80.51  | 23.29 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.66  | 79.27  | 22.61 |      | 150.0 |         |
|           |                                            | Z | 6.46  | 79.88  | 22.25 |      | 150.0 |         |
| 10180-CAC | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 6.16  | 79.50  | 22.60 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.39  | 78.15  | 21.85 |      | 150.0 |         |
|           |                                            | Z | 6.12  | 78.64  | 21.45 |      | 150.0 |         |
| 10181-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 4.92  | 76.77  | 22.71 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.37  | 75.45  | 21.97 |      | 150.0 |         |
|           |                                            | Z | 4.85  | 76.15  | 21.69 |      | 150.0 |         |
| 10182-CAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 6.72  | 81.66  | 24.18 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.93  | 80.48  | 23.56 |      | 150.0 |         |
|           |                                            | Z | 6.83  | 81.27  | 23.24 |      | 150.0 |         |
| 10183-AAA | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 6.15  | 79.47  | 22.59 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.38  | 78.12  | 21.84 |      | 150.0 |         |
|           |                                            | Z | 6.11  | 78.62  | 21.44 |      | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 51 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAC | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 4.93 | 76.77 | 22.71 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.38 | 75.46 | 21.97 |      | 150.0 |         |
|           |                                               | Z | 4.86 | 76.17 | 21.69 |      | 150.0 |         |
| 10185-CAC | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 6.75 | 81.72 | 24.20 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.96 | 80.55 | 23.59 |      | 150.0 |         |
|           |                                               | Z | 6.86 | 81.33 | 23.27 |      | 150.0 |         |
| 10186-AAC | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 6.18 | 79.53 | 22.62 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.40 | 78.19 | 21.87 |      | 150.0 |         |
|           |                                               | Z | 6.14 | 78.68 | 21.47 |      | 150.0 |         |
| 10187-CAC | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 5.31 | 78.47 | 23.52 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.65 | 76.81 | 22.63 |      | 150.0 |         |
|           |                                               | Z | 5.14 | 77.36 | 22.26 |      | 150.0 |         |
| 10188-CAC | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 6.87 | 82.12 | 24.43 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 6.08 | 80.97 | 23.83 |      | 150.0 |         |
|           |                                               | Z | 7.00 | 81.77 | 23.51 |      | 150.0 |         |
| 10189-AAC | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 6.26 | 79.80 | 22.79 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.48 | 78.47 | 22.05 |      | 150.0 |         |
|           |                                               | Z | 6.22 | 78.97 | 21.66 |      | 150.0 |         |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 5.28 | 68.77 | 17.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.21 | 68.90 | 17.37 |      | 150.0 |         |
|           |                                               | Z | 5.13 | 68.52 | 16.90 |      | 150.0 |         |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 5.52 | 69.19 | 17.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.44 | 69.32 | 17.52 |      | 150.0 |         |
|           |                                               | Z | 5.35 | 68.93 | 17.05 |      | 150.0 |         |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 5.55 | 69.17 | 17.42 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.48 | 69.31 | 17.51 |      | 150.0 |         |
|           |                                               | Z | 5.39 | 68.93 | 17.06 |      | 150.0 |         |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 5.32 | 68.92 | 17.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.24 | 69.05 | 17.43 |      | 150.0 |         |
|           |                                               | Z | 5.16 | 68.65 | 16.95 |      | 150.0 |         |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 5.53 | 69.19 | 17.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.46 | 69.33 | 17.52 |      | 150.0 |         |
|           |                                               | Z | 5.37 | 68.94 | 17.06 |      | 150.0 |         |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 5.56 | 69.19 | 17.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.49 | 69.33 | 17.53 |      | 150.0 |         |
|           |                                               | Z | 5.40 | 68.95 | 17.07 |      | 150.0 |         |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 5.27 | 68.92 | 17.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.19 | 69.06 | 17.39 |      | 150.0 |         |
|           |                                               | Z | 5.10 | 68.65 | 16.90 |      | 150.0 |         |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 5.54 | 69.24 | 17.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.47 | 69.37 | 17.55 |      | 150.0 |         |
|           |                                               | Z | 5.38 | 68.98 | 17.08 |      | 150.0 |         |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 5.57 | 69.17 | 17.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.50 | 69.30 | 17.54 |      | 150.0 |         |
|           |                                               | Z | 5.41 | 68.92 | 17.08 |      | 150.0 |         |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.46 | 67.58 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.39 | 67.71 | 16.56 |      | 150.0 |         |
|           |                                               | Z | 5.28 | 67.19 | 16.04 |      | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 52 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                           |   |       |        |       |      |       |         |
|-----------|-------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.89  | 68.11  | 16.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.85  | 68.34  | 16.93 |      | 150.0 |         |
|           |                                           | Z | 5.71  | 67.80  | 16.41 |      | 150.0 |         |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.49  | 67.62  | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.43  | 67.74  | 16.49 |      | 150.0 |         |
|           |                                           | Z | 5.31  | 67.23  | 15.98 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 3.35  | 67.69  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 3.30  | 67.98  | 16.28 |      | 150.0 |         |
|           |                                           | Z | 3.20  | 67.29  | 15.49 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 24.31 | 102.14 | 30.64 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 31.36 | 108.09 | 32.09 |      | 65.0  |         |
|           |                                           | Z | 19.68 | 96.01  | 27.92 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 20.94 | 98.17  | 28.96 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.82 | 102.32 | 29.88 |      | 65.0  |         |
|           |                                           | Z | 17.88 | 93.35  | 26.67 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 32.79 | 113.53 | 35.76 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 51.57 | 124.28 | 38.53 |      | 65.0  |         |
|           |                                           | Z | 22.52 | 102.90 | 31.55 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 23.82 | 101.66 | 30.43 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 30.40 | 107.37 | 31.81 |      | 65.0  |         |
|           |                                           | Z | 19.35 | 95.62  | 27.74 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 20.60 | 97.82  | 28.80 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.24 | 101.82 | 29.67 |      | 65.0  |         |
|           |                                           | Z | 17.62 | 93.05  | 26.52 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 31.99 | 112.93 | 35.53 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 49.52 | 123.32 | 38.20 |      | 65.0  |         |
|           |                                           | Z | 22.03 | 102.40 | 31.34 |      | 65.0  |         |
| 10232-CAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 23.84 | 101.69 | 30.44 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 30.42 | 107.40 | 31.82 |      | 65.0  |         |
|           |                                           | Z | 19.35 | 95.63  | 27.74 |      | 65.0  |         |
| 10233-CAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 20.63 | 97.86  | 28.82 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.29 | 101.88 | 29.69 |      | 65.0  |         |
|           |                                           | Z | 17.63 | 93.07  | 26.53 |      | 65.0  |         |
| 10234-CAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 31.18 | 112.24 | 35.24 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 47.38 | 122.19 | 37.80 |      | 65.0  |         |
|           |                                           | Z | 21.57 | 101.86 | 31.09 |      | 65.0  |         |
| 10235-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 23.99 | 101.82 | 30.48 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 30.69 | 107.58 | 31.88 |      | 65.0  |         |
|           |                                           | Z | 19.41 | 95.70  | 27.76 |      | 65.0  |         |
| 10236-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 20.77 | 97.96  | 28.84 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.51 | 102.01 | 29.72 |      | 65.0  |         |
|           |                                           | Z | 17.72 | 93.14  | 26.54 |      | 65.0  |         |
| 10237-CAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 32.57 | 113.33 | 35.64 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 50.93 | 123.93 | 38.37 |      | 65.0  |         |
|           |                                           | Z | 22.25 | 102.62 | 31.40 |      | 65.0  |         |
| 10238-CAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 23.88 | 101.73 | 30.45 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 30.50 | 107.46 | 31.84 |      | 65.0  |         |
|           |                                           | Z | 19.36 | 95.65  | 27.74 |      | 65.0  |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 53 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                            |   |       |        |       |      |      |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10239-CAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 20.68 | 97.92  | 28.84 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 24.38 | 101.96 | 29.72 |      | 65.0 |         |
|           |                                            | Z | 17.65 | 93.11  | 26.54 |      | 65.0 |         |
| 10240-CAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 32.27 | 113.15 | 35.59 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 50.24 | 123.66 | 38.29 |      | 65.0 |         |
|           |                                            | Z | 22.12 | 102.51 | 31.37 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 17.58 | 95.83  | 31.95 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 17.15 | 96.25  | 31.82 |      | 65.0 |         |
|           |                                            | Z | 17.07 | 93.35  | 30.10 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 14.08 | 90.14  | 29.62 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 14.32 | 91.74  | 30.02 |      | 65.0 |         |
|           |                                            | Z | 11.59 | 84.15  | 26.31 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 12.13 | 89.23  | 30.35 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 12.38 | 91.02  | 30.89 |      | 65.0 |         |
|           |                                            | Z | 11.22 | 85.66  | 27.90 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 11.38 | 84.46  | 23.44 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.89 | 84.15  | 22.78 |      | 65.0 |         |
|           |                                            | Z | 10.54 | 81.57  | 21.51 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 11.34 | 84.16  | 23.29 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.83 | 83.82  | 22.62 |      | 65.0 |         |
|           |                                            | Z | 10.56 | 81.42  | 21.42 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 9.38  | 83.13  | 22.23 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.16 | 85.46  | 22.93 |      | 65.0 |         |
|           |                                            | Z | 8.30  | 79.92  | 20.53 |      | 65.0 |         |
| 10247-CAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 9.37  | 81.47  | 22.36 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.52  | 82.62  | 22.65 |      | 65.0 |         |
|           |                                            | Z | 8.67  | 79.03  | 20.86 |      | 65.0 |         |
| 10248-CAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 9.53  | 81.37  | 22.34 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.64  | 82.43  | 22.60 |      | 65.0 |         |
|           |                                            | Z | 8.86  | 79.04  | 20.89 |      | 65.0 |         |
| 10249-CAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 9.83  | 83.92  | 23.02 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.83 | 86.72  | 23.98 |      | 65.0 |         |
|           |                                            | Z | 8.80  | 80.94  | 21.48 |      | 65.0 |         |
| 10250-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 10.11 | 82.96  | 24.05 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.42 | 84.56  | 24.66 |      | 65.0 |         |
|           |                                            | Z | 9.46  | 80.66  | 22.69 |      | 65.0 |         |
| 10251-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 9.95  | 81.73  | 23.42 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.11 | 82.96  | 23.85 |      | 65.0 |         |
|           |                                            | Z | 9.43  | 79.77  | 22.16 |      | 65.0 |         |
| 10252-CAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 9.97  | 83.49  | 23.42 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.79 | 86.08  | 24.42 |      | 65.0 |         |
|           |                                            | Z | 9.25  | 81.20  | 22.21 |      | 65.0 |         |
| 10253-CAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 10.01 | 81.33  | 23.57 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.08 | 82.37  | 23.98 |      | 65.0 |         |
|           |                                            | Z | 9.54  | 79.48  | 22.39 |      | 65.0 |         |
| 10254-CAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 10.29 | 81.79  | 24.04 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.39 | 82.89  | 24.47 |      | 65.0 |         |
|           |                                            | Z | 9.84  | 79.98  | 22.87 |      | 65.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 54 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                             |   |       |       |       |      |      |         |
|-----------|---------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10255-CAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 9.81  | 81.93 | 23.12 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.20 | 83.70 | 23.85 |      | 65.0 |         |
|           |                                             | Z | 9.32  | 80.14 | 22.11 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 10.80 | 83.30 | 22.32 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.08 | 82.47 | 21.37 |      | 65.0 |         |
|           |                                             | Z | 9.84  | 80.12 | 20.25 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 10.91 | 83.13 | 22.20 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.13 | 82.21 | 21.20 |      | 65.0 |         |
|           |                                             | Z | 9.95  | 80.03 | 20.16 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 9.03  | 82.32 | 21.45 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.47  | 83.93 | 21.80 |      | 65.0 |         |
|           |                                             | Z | 7.87  | 78.82 | 19.59 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 9.66  | 81.95 | 22.94 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.88  | 83.29 | 23.35 |      | 65.0 |         |
|           |                                             | Z | 9.02  | 79.66 | 21.53 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 9.77  | 81.92 | 22.97 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.95  | 83.16 | 23.34 |      | 65.0 |         |
|           |                                             | Z | 9.13  | 79.65 | 21.56 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 9.84  | 83.77 | 23.26 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.73 | 86.43 | 24.22 |      | 65.0 |         |
|           |                                             | Z | 8.93  | 81.00 | 21.80 |      | 65.0 |         |
| 10262-CAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 10.12 | 82.96 | 24.03 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.43 | 84.56 | 24.64 |      | 65.0 |         |
|           |                                             | Z | 9.46  | 80.66 | 22.67 |      | 65.0 |         |
| 10263-CAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 9.97  | 81.78 | 23.44 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.13 | 83.00 | 23.87 |      | 65.0 |         |
|           |                                             | Z | 9.44  | 79.79 | 22.18 |      | 65.0 |         |
| 10264-CAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 9.96  | 83.46 | 23.39 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.78 | 86.04 | 24.39 |      | 65.0 |         |
|           |                                             | Z | 9.23  | 81.17 | 22.18 |      | 65.0 |         |
| 10265-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 10.20 | 81.69 | 23.61 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.33 | 82.86 | 24.08 |      | 65.0 |         |
|           |                                             | Z | 9.70  | 79.83 | 22.48 |      | 65.0 |         |
| 10266-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 10.43 | 82.06 | 24.08 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.57 | 83.27 | 24.58 |      | 65.0 |         |
|           |                                             | Z | 9.95  | 80.25 | 22.96 |      | 65.0 |         |
| 10267-CAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 9.78  | 81.51 | 22.67 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.17 | 83.24 | 23.38 |      | 65.0 |         |
|           |                                             | Z | 9.35  | 79.93 | 21.79 |      | 65.0 |         |
| 10268-CAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 10.56 | 81.04 | 23.77 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.59 | 81.97 | 24.16 |      | 65.0 |         |
|           |                                             | Z | 10.21 | 79.58 | 22.82 |      | 65.0 |         |
| 10269-CAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 10.51 | 80.83 | 23.81 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.51 | 81.67 | 24.16 |      | 65.0 |         |
|           |                                             | Z | 10.18 | 79.38 | 22.84 |      | 65.0 |         |
| 10270-CAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 9.83  | 80.23 | 22.43 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.97  | 81.38 | 22.92 |      | 65.0 |         |
|           |                                             | Z | 9.56  | 79.01 | 21.69 |      | 65.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 55 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                                    |   |         |        |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|---------|--------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.96    | 67.28  | 15.51 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.94    | 67.69  | 15.78 |      | 150.0 |         |
|           |                                                                    | Z | 2.85    | 66.94  | 14.94 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 1.88    | 67.86  | 14.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.90    | 68.76  | 15.52 |      | 150.0 |         |
|           |                                                                    | Z | 1.75    | 66.96  | 13.95 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 7.61    | 75.48  | 16.73 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 6.78    | 74.03  | 15.22 |      | 50.0  |         |
|           |                                                                    | Z | 8.15    | 75.53  | 17.19 |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 11.75   | 86.03  | 23.47 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 12.37   | 87.49  | 23.38 |      | 50.0  |         |
|           |                                                                    | Z | 10.29   | 81.76  | 21.82 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 12.05   | 86.37  | 23.61 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 12.71   | 87.86  | 23.54 |      | 50.0  |         |
|           |                                                                    | Z | 10.48   | 82.02  | 21.93 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 1.72    | 67.71  | 13.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.74    | 68.81  | 14.20 |      | 150.0 |         |
|           |                                                                    | Z | 1.54    | 66.74  | 12.42 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 1.12    | 66.09  | 12.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.11    | 67.08  | 13.10 |      | 150.0 |         |
|           |                                                                    | Z | 0.99    | 65.06  | 11.19 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 1.13    | 66.77  | 13.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.15    | 68.13  | 13.93 |      | 150.0 |         |
|           |                                                                    | Z | 0.99    | 65.56  | 11.67 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 1.21    | 67.56  | 13.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.25    | 69.25  | 14.85 |      | 150.0 |         |
|           |                                                                    | Z | 1.06    | 66.19  | 12.33 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 649.02  | 170.97 | 48.80 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 1014.63 | 176.65 | 48.93 |      | 50.0  |         |
|           |                                                                    | Z | 89.95   | 127.98 | 38.38 |      | 50.0  |         |
| 10297-AAA | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 3.15    | 69.87  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 3.16    | 70.56  | 16.59 |      | 150.0 |         |
|           |                                                                    | Z | 2.96    | 69.15  | 15.46 |      | 150.0 |         |
| 10298-AAB | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 2.01    | 68.13  | 14.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.99    | 68.94  | 14.83 |      | 150.0 |         |
|           |                                                                    | Z | 1.79    | 67.06  | 13.20 |      | 150.0 |         |
| 10299-AAB | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 3.70    | 72.64  | 17.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 3.34    | 71.85  | 16.22 |      | 150.0 |         |
|           |                                                                    | Z | 3.50    | 71.45  | 15.41 |      | 150.0 |         |
| 10300-AAB | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 3.52    | 71.13  | 15.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 3.14    | 70.17  | 14.84 |      | 150.0 |         |
|           |                                                                    | Z | 3.28    | 69.89  | 14.13 |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 5.95    | 68.52  | 19.20 | 4.17 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 5.62    | 67.69  | 18.63 |      | 80.0  |         |
|           |                                                                    | Z | 5.93    | 68.43  | 18.62 |      | 80.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 6.77    | 70.38  | 20.67 | 4.96 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 6.49    | 69.92  | 20.38 |      | 80.0  |         |
|           |                                                                    | Z | 7.01    | 71.35  | 20.68 |      | 80.0  |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 56 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                                     |   |       |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 6.58  | 70.36 | 20.69 | 4.96  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.28  | 69.84 | 20.37 |       | 80.0  |         |
|           |                                                                     | Z | 6.88  | 71.51 | 20.76 |       | 80.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 6.21  | 69.56 | 19.73 | 4.17  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.95  | 69.18 | 19.50 |       | 80.0  |         |
|           |                                                                     | Z | 6.42  | 70.45 | 19.71 |       | 80.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 7.33  | 77.16 | 24.84 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.51  | 75.00 | 23.72 |       | 50.0  |         |
|           |                                                                     | Z | 7.45  | 75.90 | 23.03 |       | 50.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 7.12  | 74.56 | 23.82 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.52  | 72.95 | 22.90 |       | 50.0  |         |
|           |                                                                     | Z | 7.28  | 74.05 | 22.56 |       | 50.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 7.12  | 74.98 | 23.81 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.49  | 73.32 | 22.89 |       | 50.0  |         |
|           |                                                                     | Z | 7.27  | 74.34 | 22.47 |       | 50.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 7.12  | 75.24 | 23.93 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.46  | 73.51 | 22.99 |       | 50.0  |         |
|           |                                                                     | Z | 7.27  | 74.53 | 22.55 |       | 50.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 7.23  | 74.79 | 23.94 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.63  | 73.25 | 23.06 |       | 50.0  |         |
|           |                                                                     | Z | 7.39  | 74.32 | 22.71 |       | 50.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 7.07  | 74.60 | 23.73 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.46  | 72.97 | 22.82 |       | 50.0  |         |
|           |                                                                     | Z | 7.24  | 74.06 | 22.45 |       | 50.0  |         |
| 10311-AAA | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.47  | 69.03 | 15.72 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 3.47  | 69.63 | 16.16 |       | 150.0 |         |
|           |                                                                     | Z | 3.28  | 68.37 | 15.16 |       | 150.0 |         |
| 10313-AAA | iDEN 1:3                                                            | X | 9.20  | 82.55 | 20.40 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 10.25 | 84.89 | 20.95 |       | 70.0  |         |
|           |                                                                     | Z | 8.19  | 79.42 | 19.26 |       | 70.0  |         |
| 10314-AAA | iDEN 1:6                                                            | X | 12.40 | 90.26 | 25.64 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 17.85 | 97.88 | 27.89 |       | 30.0  |         |
|           |                                                                     | Z | 9.17  | 82.66 | 22.79 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.36  | 65.63 | 15.20 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.35  | 66.20 | 15.84 |       | 150.0 |         |
|           |                                                                     | Z | 1.32  | 65.03 | 14.36 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 5.42  | 69.11 | 17.60 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.34  | 69.22 | 17.67 |       | 150.0 |         |
|           |                                                                     | Z | 5.30  | 68.94 | 17.24 |       | 150.0 |         |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 5.42  | 69.11 | 17.60 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.34  | 69.22 | 17.67 |       | 150.0 |         |
|           |                                                                     | Z | 5.30  | 68.94 | 17.24 |       | 150.0 |         |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 5.08  | 67.22 | 16.21 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.01  | 67.41 | 16.35 |       | 150.0 |         |
|           |                                                                     | Z | 4.89  | 66.86 | 15.79 |       | 150.0 |         |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.72  | 67.45 | 16.44 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.71  | 67.79 | 16.64 |       | 150.0 |         |
|           |                                                                     | Z | 5.62  | 67.37 | 16.18 |       | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 57 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                                                |   |      |       |       |      |       |         |
|-----------|--------------------------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                            | X | 6.04 | 68.01 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.97 | 68.10 | 16.61 |      | 150.0 |         |
|           |                                                                                | Z | 5.86 | 67.64 | 16.16 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                     | X | 1.72 | 67.71 | 13.64 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.74 | 68.81 | 14.20 |      | 115.0 |         |
|           |                                                                                | Z | 1.54 | 66.74 | 12.42 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                     | X | 1.72 | 67.71 | 13.64 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.74 | 68.81 | 14.20 |      | 115.0 |         |
|           |                                                                                | Z | 1.54 | 66.74 | 12.42 |      | 115.0 |         |
| 10406-AAA | CDMA2000, RC3, SO32, SCH0, Full Rate                                           | X | 1.21 | 67.56 | 13.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 1.25 | 69.25 | 14.85 |      | 150.0 |         |
|           |                                                                                | Z | 1.06 | 66.19 | 12.33 |      | 150.0 |         |
| 10410-AAA | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)                 | X | 4.28 | 71.85 | 12.33 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                                | Y | 3.01 | 68.40 | 9.79  |      | 80.0  |         |
|           |                                                                                | Z | 3.84 | 69.75 | 10.93 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                      | X | 1.19 | 64.07 | 14.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 1.18 | 64.56 | 14.86 |      | 150.0 |         |
|           |                                                                                | Z | 1.14 | 63.51 | 13.46 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                  | X | 5.27 | 68.77 | 17.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.21 | 68.93 | 17.41 |      | 150.0 |         |
|           |                                                                                | Z | 5.13 | 68.55 | 16.94 |      | 150.0 |         |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                      | X | 5.27 | 68.77 | 17.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.21 | 68.93 | 17.41 |      | 150.0 |         |
|           |                                                                                | Z | 5.13 | 68.55 | 16.94 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)  | X | 5.24 | 68.80 | 17.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.18 | 68.97 | 17.35 |      | 150.0 |         |
|           |                                                                                | Z | 5.10 | 68.59 | 16.88 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 5.28 | 68.82 | 17.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.21 | 68.98 | 17.39 |      | 150.0 |         |
|           |                                                                                | Z | 5.13 | 68.60 | 16.92 |      | 150.0 |         |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                   | X | 5.43 | 68.91 | 17.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.36 | 69.06 | 17.46 |      | 150.0 |         |
|           |                                                                                | Z | 5.28 | 68.69 | 17.01 |      | 150.0 |         |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                | X | 5.70 | 69.42 | 17.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.62 | 69.56 | 17.66 |      | 150.0 |         |
|           |                                                                                | Z | 5.52 | 69.17 | 17.20 |      | 150.0 |         |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                | X | 5.58 | 69.30 | 17.51 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.51 | 69.43 | 17.59 |      | 150.0 |         |
|           |                                                                                | Z | 5.41 | 69.04 | 17.12 |      | 150.0 |         |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                    | X | 5.81 | 68.07 | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.73 | 68.14 | 16.79 |      | 150.0 |         |
|           |                                                                                | Z | 5.61 | 67.64 | 16.29 |      | 150.0 |         |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                  | X | 5.82 | 68.08 | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.74 | 68.17 | 16.81 |      | 150.0 |         |
|           |                                                                                | Z | 5.62 | 67.67 | 16.31 |      | 150.0 |         |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 58 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

|           |                                                                |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.80 | 67.95 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.73 | 68.07 | 16.75 |      | 150.0 |         |
|           |                                                                | Z | 5.61 | 67.57 | 16.25 |      | 150.0 |         |
| 10430-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.65 | 70.29 | 17.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.58 | 70.68 | 18.05 |      | 150.0 |         |
|           |                                                                | Z | 4.44 | 70.06 | 17.38 |      | 150.0 |         |
| 10431-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 5.04 | 69.30 | 17.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.96 | 69.48 | 17.41 |      | 150.0 |         |
|           |                                                                | Z | 4.85 | 68.99 | 16.84 |      | 150.0 |         |
| 10432-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 5.35 | 69.31 | 17.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.27 | 69.46 | 17.52 |      | 150.0 |         |
|           |                                                                | Z | 5.17 | 69.02 | 17.01 |      | 150.0 |         |
| 10433-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 5.61 | 69.38 | 17.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.53 | 69.50 | 17.62 |      | 150.0 |         |
|           |                                                                | Z | 5.43 | 69.09 | 17.15 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.63 | 70.45 | 17.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.57 | 70.90 | 17.78 |      | 150.0 |         |
|           |                                                                | Z | 4.42 | 70.24 | 17.08 |      | 150.0 |         |
| 10435-AAA | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.27 | 71.77 | 12.29 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 3.01 | 68.37 | 9.76  |      | 80.0  |         |
|           |                                                                | Z | 3.83 | 69.71 | 10.90 |      | 80.0  |         |
| 10447-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 4.28 | 69.01 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.20 | 69.26 | 16.68 |      | 150.0 |         |
|           |                                                                | Z | 4.07 | 68.61 | 15.97 |      | 150.0 |         |
| 10448-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 4.81 | 68.94 | 17.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.74 | 69.14 | 17.19 |      | 150.0 |         |
|           |                                                                | Z | 4.63 | 68.66 | 16.63 |      | 150.0 |         |
| 10449-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 5.07 | 68.94 | 17.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.00 | 69.12 | 17.31 |      | 150.0 |         |
|           |                                                                | Z | 4.91 | 68.68 | 16.80 |      | 150.0 |         |
| 10450-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 5.25 | 68.91 | 17.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.19 | 69.06 | 17.36 |      | 150.0 |         |
|           |                                                                | Z | 5.11 | 68.67 | 16.88 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 4.20 | 69.11 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.12 | 69.40 | 16.34 |      | 150.0 |         |
|           |                                                                | Z | 3.97 | 68.70 | 15.58 |      | 150.0 |         |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 59 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## APPENDIX F

### Calibration of The Validation Dipole

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 60 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **Samsung (Dymstec)**

Certificate No: CD835V3-1105\_Feb15

## CALIBRATION CERTIFICATE

Object **CD835V3 - SN: 1105**

Calibration procedure(s) **QA CAL-20.v6  
Calibration procedure for dipoles in air**

Calibration date: **February 17, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A       | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A      | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A      | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 10 dB Attenuator | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Probe ER3DV6               | SN: 2336           | 31-Dec-14 (No. ER3-2336_Dec14)    | Dec-15                 |
| Probe H3DV6                | SN: 6065           | 31-Dec-14 (No. H3-6065_Dec14)     | Dec-15                 |
| DAE4                       | SN: 781            | 12-Sep-14 (No. DAE4-781_Sep14)    | Sep-15                 |
| Secondary Standards        | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4419B  | SN: GB42420191     | 09-Oct-09 (in house check Sep-14) | In house check: Sep-16 |
| Power sensor HP E4412A     | SN: US38485102     | 05-Jan-10 (in house check Sep-14) | In house check: Sep-16 |
| Power sensor HP 8482A      | SN: US37295597     | 09-Oct-09 (in house check Sep-14) | In house check: Sep-16 |
| Network Analyzer HP 8753E  | US37390585         | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |
| RF generator R&S SMT-06    | SN: 832283/011     | 27-Aug-12 (in house check Oct-13) | In house check: Oct-16 |

|                |                             |                                          |               |
|----------------|-----------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Leif Klysner</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | Name<br><b>Fin Bomholt</b>  | Deputy Technical Manager                 | Signature<br> |

*Ok to use*  
*2015.2.6*

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: February 19, 2015

|                                 |                          |                  |              |            |
|---------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M               | Report Number: AM-049-M1 |                  | Page :       | 61 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

#### References

- [1] ANSI-C63.19-2011  
 American National Standard, Methods of Measurement of Compatibility between Wireless Communications  
 Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

|                                 |                          |                  |              |            |
|---------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M               | Report Number: AM-049-M1 |                  | Page :       | 62 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                     |         |
|------------------------------------|---------------------|---------|
| DASY Version                       | DASY5               | V52.8.8 |
| Phantom                            | HAC Test Arch       |         |
| Distance Dipole Top - Probe Center | 15mm                |         |
| Scan resolution                    | dx, dy = 5 mm       |         |
| Frequency                          | 835 MHz $\pm$ 1 MHz |         |
| Input power drift                  | < 0.05 dB           |         |

### Maximum Field values at 835 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum                           |
|------------------------------------|--------------------|------------------------------------------------|
| Maximum measured above high end    | 100 mW input power | 107.0 V/m = 40.59 dBV/m                        |
| Maximum measured above low end     | 100 mW input power | 106.6 V/m = 40.56 dBV/m                        |
| Averaged maximum above arm         | 100 mW input power | <b>106.8 V/m <math>\pm</math> 12.8 % (k=2)</b> |

### Appendix (Additional assessments outside the scope of SCS0108)

#### Antenna Parameters

| Frequency | Return Loss | Impedance                       |
|-----------|-------------|---------------------------------|
| 800 MHz   | 16.5 dB     | 43.3 $\Omega$ - 12.4 j $\Omega$ |
| 835 MHz   | 28.9 dB     | 49.5 $\Omega$ + 3.5 j $\Omega$  |
| 900 MHz   | 16.5 dB     | 56.3 $\Omega$ - 14.7 j $\Omega$ |
| 950 MHz   | 20.3 dB     | 44.1 $\Omega$ + 6.7 j $\Omega$  |
| 960 MHz   | 16.0 dB     | 50.4 $\Omega$ + 16.0 j $\Omega$ |

#### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 63 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## Impedance Measurement Plot

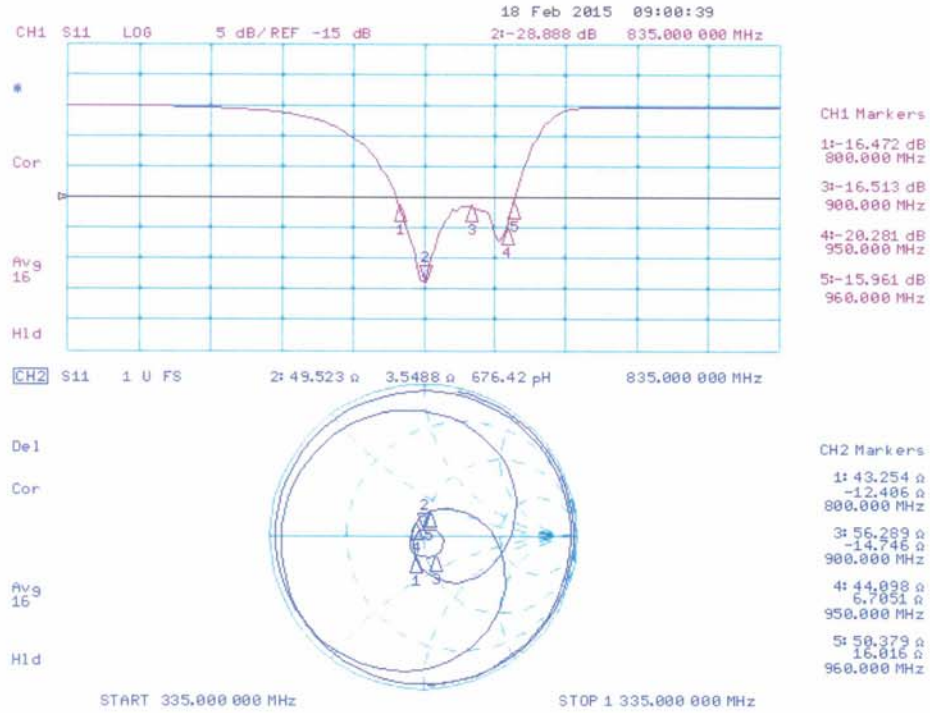

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 64 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## DASY5 E-field Result

Date: 17.02.2015

Test Laboratory: SPEAG Lab2

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1105**

Communication System: UID 0 - CW ; Frequency: 835 MHz  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2014;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 12.09.2014
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):**  
Interpolated grid: dx=0.5000 mm, dy=0.5000 mm  
Device Reference Point: 0, 0, -6.3 mm  
Reference Value = 121.9 V/m; Power Drift = -0.01 dB  
Applied MIF = 0.00 dB  
RF audio interference level = 40.59 dBV/m  
**Emission category: M3**

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M3   | Grid 2 M3   | Grid 3 M3   |
| 40.16 dBV/m | 40.59 dBV/m | 40.55 dBV/m |
| Grid 4 M4   | Grid 5 M4   | Grid 6 M4   |
| 35.7 dBV/m  | 36.1 dBV/m  | 36.08 dBV/m |
| Grid 7 M3   | Grid 8 M3   | Grid 9 M3   |
| 40.21 dBV/m | 40.56 dBV/m | 40.54 dBV/m |

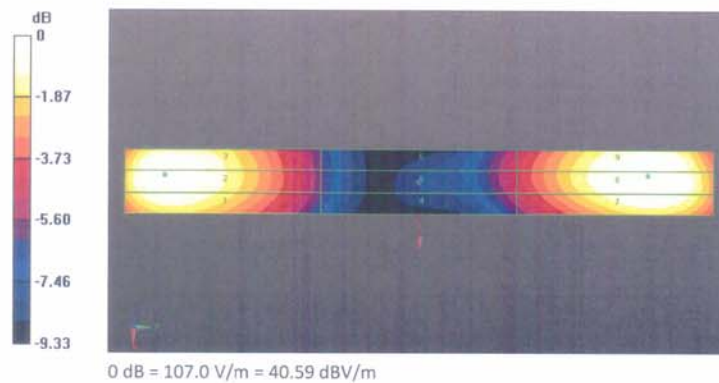

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 65 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Samsung (Dymstec)**

Certificate No: **CD1880V3-1016\_Jan15**

## CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1016**

Calibration procedure(s) **QA CAL-20.v6**  
**Calibration procedure for dipoles in air**

Calibration date: **January 20, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter EPM-442A       | GB37480704         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A      | US37292783         | 07-Oct-14 (No. 217-02020)         | Oct-15                 |
| Power sensor HP 8481A      | MY41092317         | 07-Oct-14 (No. 217-02021)         | Oct-15                 |
| Reference 10 dB Attenuator | SN: 5047.2 / 06327 | 03-Apr-14 (No. 217-01921)         | Apr-15                 |
| Probe ER3DV6               | SN: 2336           | 31-Dec-14 (No. ER3-2336_Dec14)    | Dec-15                 |
| Probe H3DV6                | SN: 6065           | 31-Dec-14 (No. H3-6065_Dec14)     | Dec-15                 |
| DAE4                       | SN: 781            | 12-Sep-14 (No. DAE4-781_Sep14)    | Sep-15                 |
| Secondary Standards        | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4419B  | SN: GB42420191     | 09-Oct-09 (in house check Sep-14) | In house check: Sep-16 |
| Power sensor HP E4412A     | SN: US38485102     | 05-Jan-10 (in house check Sep-14) | In house check: Sep-16 |
| Power sensor HP 8482A      | SN: US37295597     | 09-Oct-09 (in house check Sep-14) | In house check: Sep-16 |
| Network Analyzer HP 8753E  | US37390585         | 18-Oct-01 (in house check Oct-14) | In house check: Oct-15 |
| RF generator R&S SMT-06    | SN: 832283/011     | 27-Aug-12 (in house check Oct-13) | In house check: Oct-16 |

|                |                             |                                          |               |
|----------------|-----------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Leif Klysner</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Fin Bomholt</b>          | Deputy Technical Manager                 |               |

*O.K. to use*  
*2015.1.28*

Issued: January 20, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: CD1880V3-1016\_Jan15

Page 1 of 7

|                                 |                          |                  |              |            |
|---------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M               | Report Number: AM-049-M1 |                  | Page :       | 66 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |



## References

- [1] ANSI-C63.19-2011  
 American National Standard, Methods of Measurement of Compatibility between Wireless Communications  
 Devices and Hearing Aids.

## Methods Applied and Interpretation of Parameters:

- **Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- **Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- **Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- **Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- **E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

|                                 |                          |                  |              |            |
|---------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M               | Report Number: AM-049-M1 |                  | Page :       | 67 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                                              |         |
|------------------------------------|----------------------------------------------|---------|
| DASY Version                       | DASY5                                        | V52.8.8 |
| Phantom                            | HAC Test Arch                                |         |
| Distance Dipole Top - Probe Center | 10 mm                                        |         |
| Scan resolution                    | dx, dy = 5 mm                                |         |
| Frequency                          | 1730 MHz $\pm$ 1 MHz<br>1880 MHz $\pm$ 1 MHz |         |
| Input power drift                  | < 0.05 dB                                    |         |

### Maximum Field values at 1730 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum        |
|------------------------------------|--------------------|-----------------------------|
| Maximum measured above high end    | 100 mW input power | 100.2 V/m = 40.02 dBV/m     |
| Maximum measured above low end     | 100 mW input power | 94.6 V/m = 39.52 dBV/m      |
| Averaged maximum above arm         | 100 mW input power | 97.4 V/m $\pm$ 12.8 % (k=2) |

### Maximum Field values at 1880 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum        |
|------------------------------------|--------------------|-----------------------------|
| Maximum measured above high end    | 100 mW input power | 91.6 V/m = 39.24 dBV/m      |
| Maximum measured above low end     | 100 mW input power | 89.2 V/m = 39.00 dBV/m      |
| Averaged maximum above arm         | 100 mW input power | 90.4 V/m $\pm$ 12.8 % (k=2) |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 68 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## Appendix (Additional assessments outside the scope of SCS0108)

### Antenna Parameters

#### Nominal Frequencies

| Frequency | Return Loss | Impedance                   |
|-----------|-------------|-----------------------------|
| 1730 MHz  | 25.0 dB     | $51.7 \Omega + 5.5 j\Omega$ |
| 1880 MHz  | 22.2 dB     | $50.0 \Omega + 7.8 j\Omega$ |
| 1900 MHz  | 23.1 dB     | $52.6 \Omega + 6.7 j\Omega$ |
| 1950 MHz  | 33.5 dB     | $51.9 \Omega + 0.9 j\Omega$ |
| 2000 MHz  | 19.9 dB     | $41.4 \Omega + 3.3 j\Omega$ |

### 3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.


The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 69 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## Impedance Measurement Plot

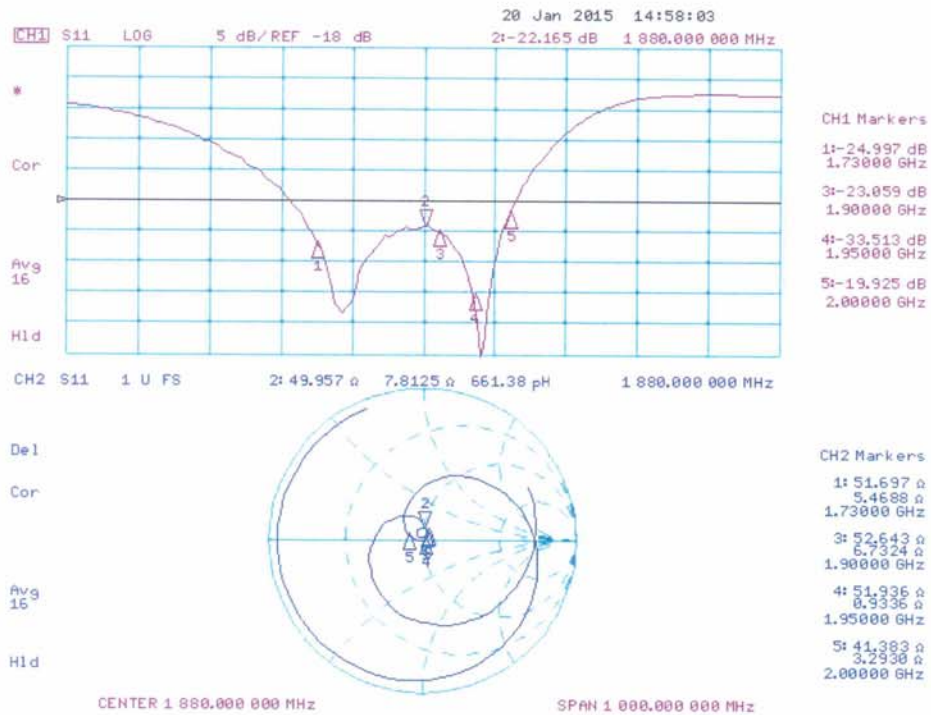

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 70 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

## DASY5 E-field Result

Date: 20.01.2015

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1016**

Communication System: UID 0 - CW ; Frequency: 1880 MHz, Frequency: 1730 MHz

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ER3DV6 - SN2336; ConvF(1, 1, 1); Calibrated: 31.12.2014;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 12.09.2014
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 147.7 V/m; Power Drift = -0.01 dB

Applied MIF = 0.00 dB

RF audio interference level = 39.24 dBV/m

**Emission category: M2**

MIF scaled E-field


|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 38.69 dBV/m | 39 dBV/m    | 38.92 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 36.63 dBV/m | 36.94 dBV/m | 36.93 dBV/m |
| Grid 7 M2   | Grid 8 M2   | Grid 9 M2   |
| 38.93 dBV/m | 39.24 dBV/m | 39.19 dBV/m |

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 71 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |

Dipole E-Field measurement @ 1880MHz/E-Scan - 1730MHz d=15mm/Hearing Aid Compatibility Test (41x181x1): Interpolated  
grid: dx=0.5000 mm, dy=0.5000 mm  
Device Reference Point: 0, 0, -6.3 mm  
Reference Value = 160.8 V/m; Power Drift = -0.04 dB  
Applied MIF = 0.00 dB  
RF audio interference level = 40.02 dBV/m  
Emission category: M1

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 39.18 dBV/m | 39.52 dBV/m | 39.44 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 37.49 dBV/m | 37.95 dBV/m | 37.94 dBV/m |
| Grid 7 M2   | Grid 8 M1   | Grid 9 M2   |
| 39.62 dBV/m | 40.02 dBV/m | 39.98 dBV/m |

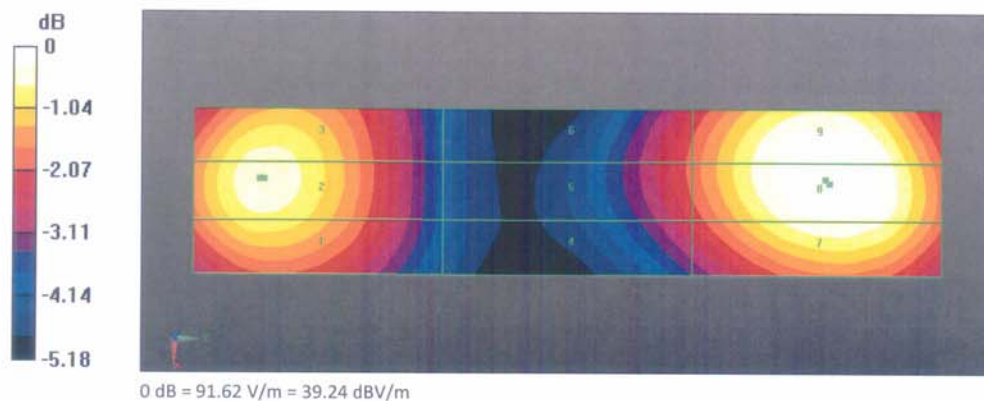

|                                                                                                                    |                          |                  |              |            |
|--------------------------------------------------------------------------------------------------------------------|--------------------------|------------------|--------------|------------|
| FCC ID:A3LSMJ500M                                                                                                  | Report Number: AM-049-M1 |                  | Page :       | 72 / 72    |
| <br>SAMSUNG Electronics CO. LTD | EUT Type:                | Portable Handset | Issue Date : | 2015.06.16 |