


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (173) of (220)




5M BW QPSK Low ch. 1RB

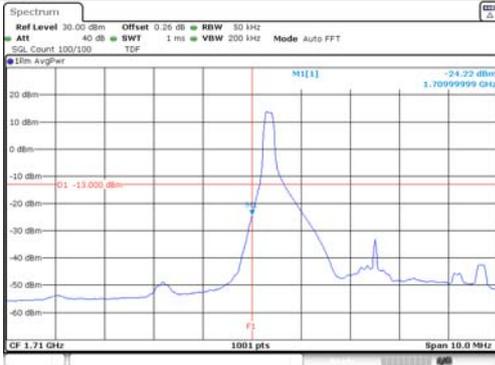

5M BW QPSK High ch. 1RB

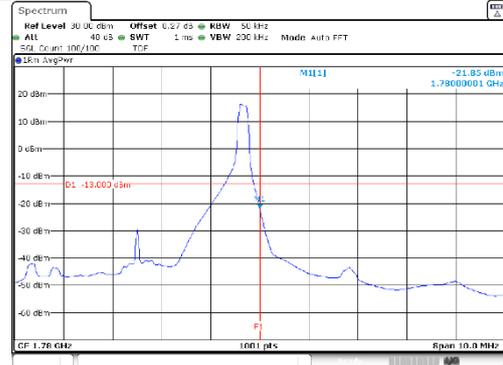


5M BW QPSK Low ch. FRB

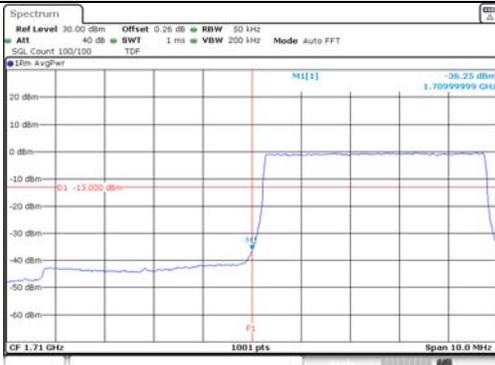


5M BW QPSK High ch. FRB



5M BW 16QAM Low ch. 1RB

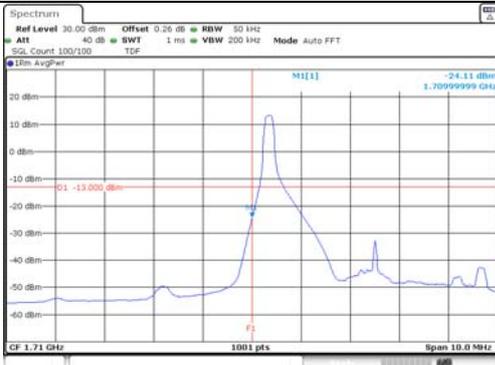

5M BW 16QAM High ch. 1RB

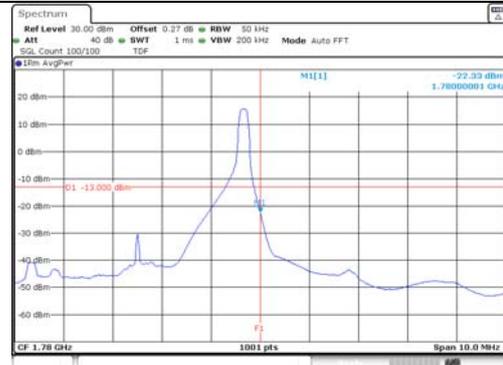

5M BW 16QAM Low ch. FRB



5M BW 16QAM High ch. FRB




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (174) of (220)




10M BW QPSK Low ch. 1RB

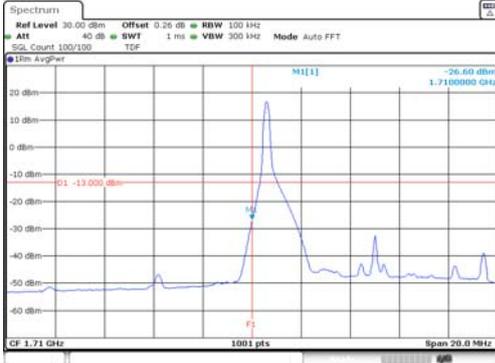


10M BW QPSK High ch. 1RB

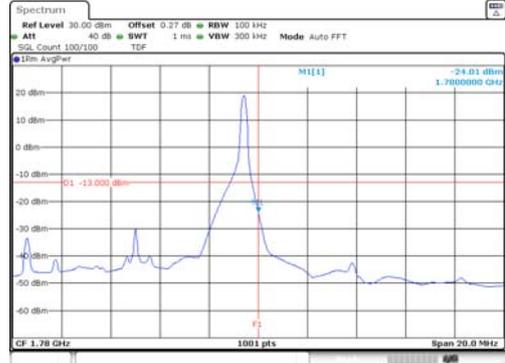


10M BW QPSK Low ch. FRB

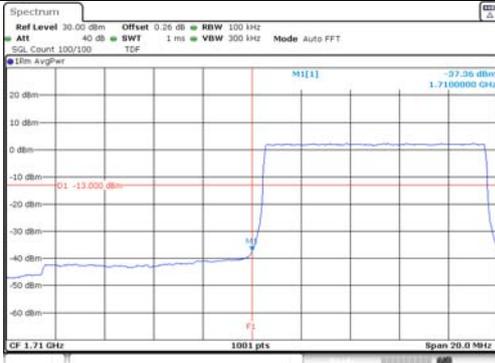


10M BW QPSK High ch. FRB

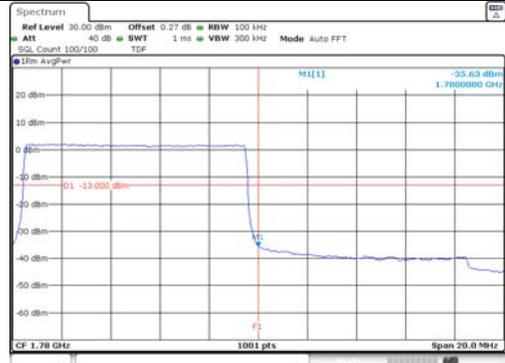


10M BW 16QAM Low ch. 1RB

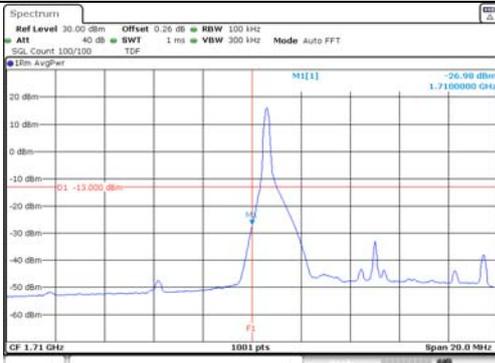

10M BW 16QAM High ch. 1RB

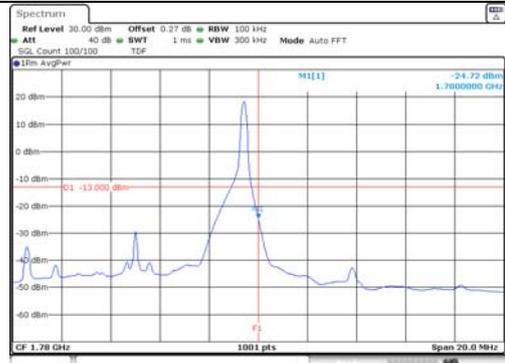

10M BW 16QAM Low ch. FRB

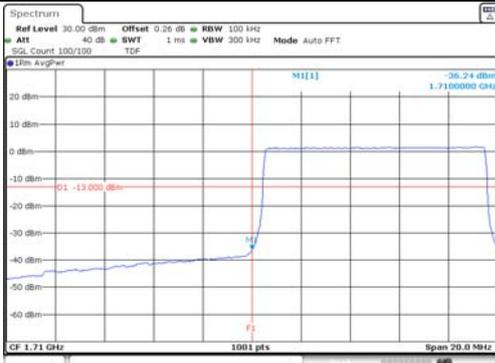

10M BW 16QAM High ch. FRB




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (175) of (220)




15M BW QPSK Low ch. 1RB

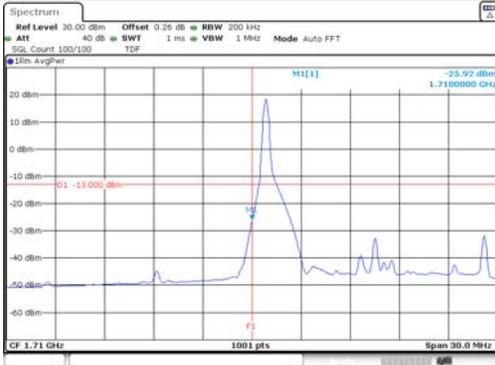


15M BW QPSK High ch. 1RB

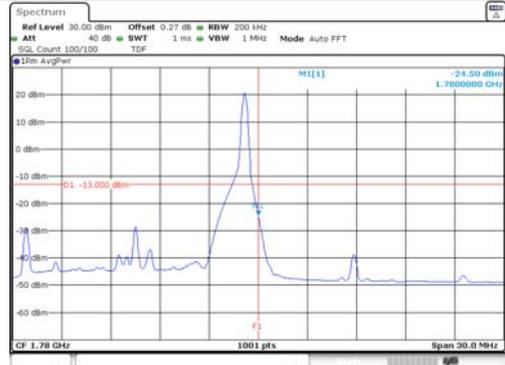


15M BW QPSK Low ch. FRB

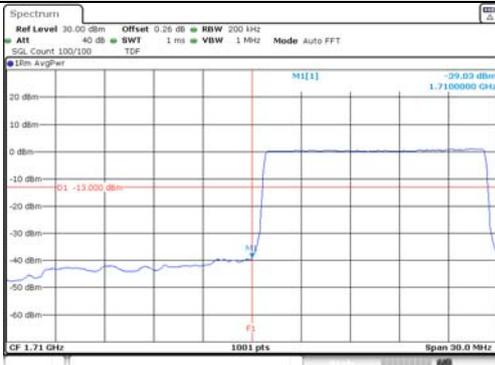


15M BW QPSK High ch. FRB

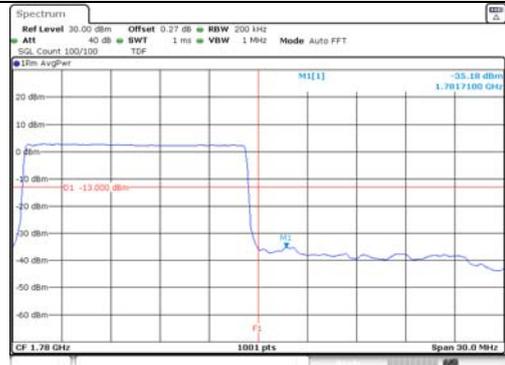

15M BW 16QAM Low ch. 1RB

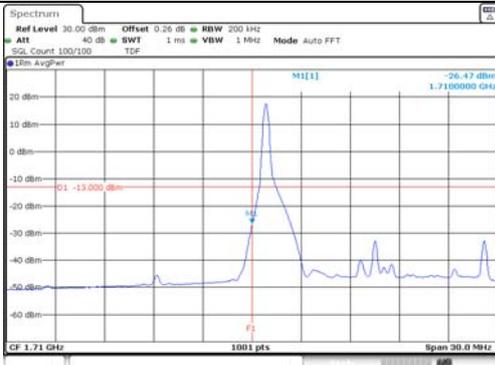

15M BW 16QAM High ch. 1RB

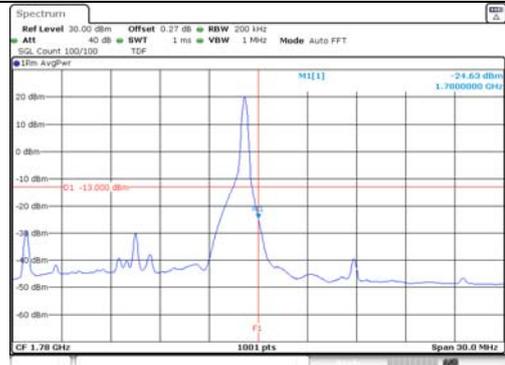

15M BW 16QAM Low ch. FRB



15M BW 16QAM High ch. FRB




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (176) of (220)




20M BW QPSK Low ch. 1RB

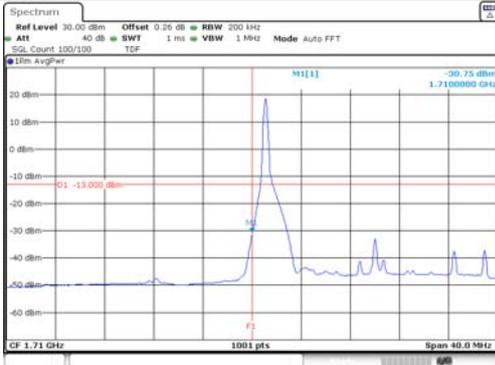


20M BW QPSK High ch. 1RB

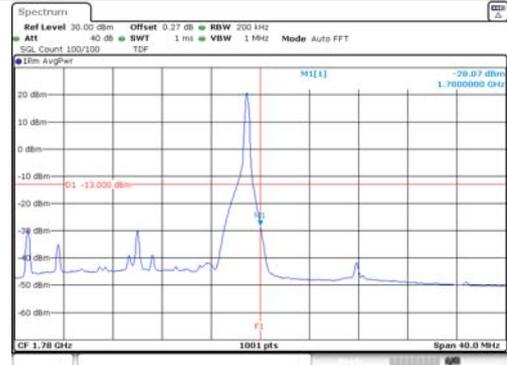


20M BW QPSK Low ch. FRB

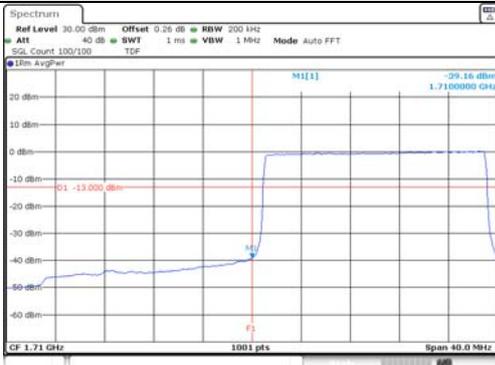


20M BW QPSK High ch. FRB

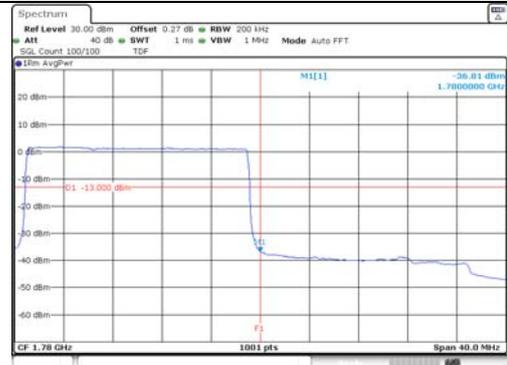

20M BW 16QAM Low ch. 1RB

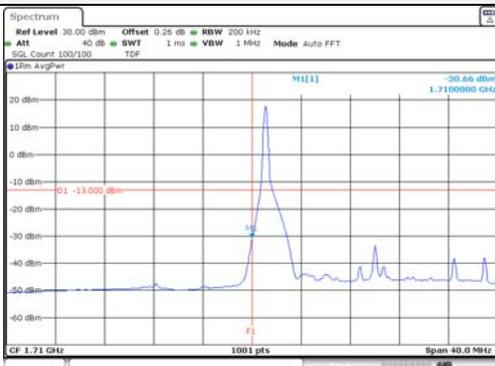


20M BW 16QAM High ch. 1RB

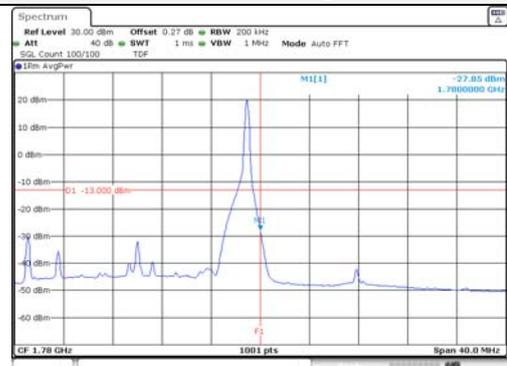

20M BW 16QAM Low ch. FRB




20M BW 16QAM High ch. FRB

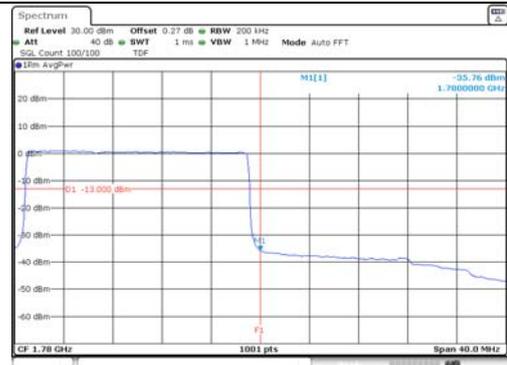

7.5. Peak to Average Power Ratio (PAPR)

Test setup

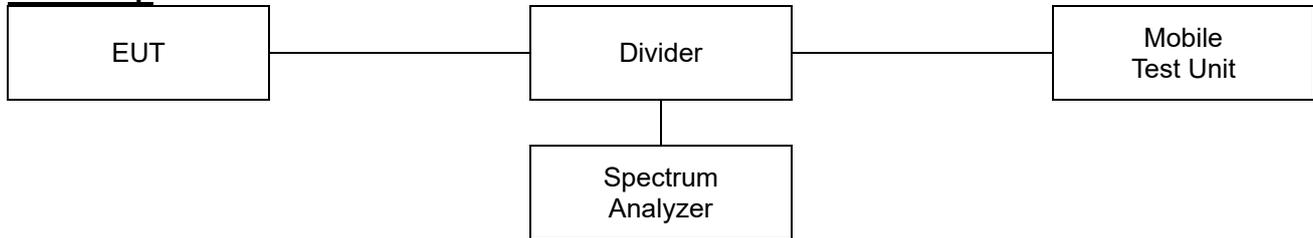

Limit

According to §24.232(d), §27.50(d)(5), the peak-to-average ratio(PAR) of the transmission must not exceed 13 dB.

Test procedure

971168 D01 v03r01 - Section 5.7.2

ANSI 63.26-2015 – Section 5.2.3.4

Test settings

5.2.3.4 Measurement of peak power in a broadband noise-like signal using CCDF

- 1) Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth
- 2) Set the number of counts to a value that stabilizes the measured CCDF curve.
- 3) Set the measurement interval as follows:
 - a) For continuous transmissions, set to the greater of [10 x (number of points in sweep) x (transmission symbol period)] or 1 ms.
 - b) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - c) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- 4) Record the maximum PAPR level associated with a probability of 0.1%

5.2.6 Peak-to-average power ratio


Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{PK} .

Use one of the applicable procedure presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{AG} . Determine the P.A.P.R from:

$$PAPR(\text{dB}) = P_{PK}(\text{dBm or dBW}) - P_{AG}(\text{dBm or dBW})$$

Test results

Test mode: LTE Band 2

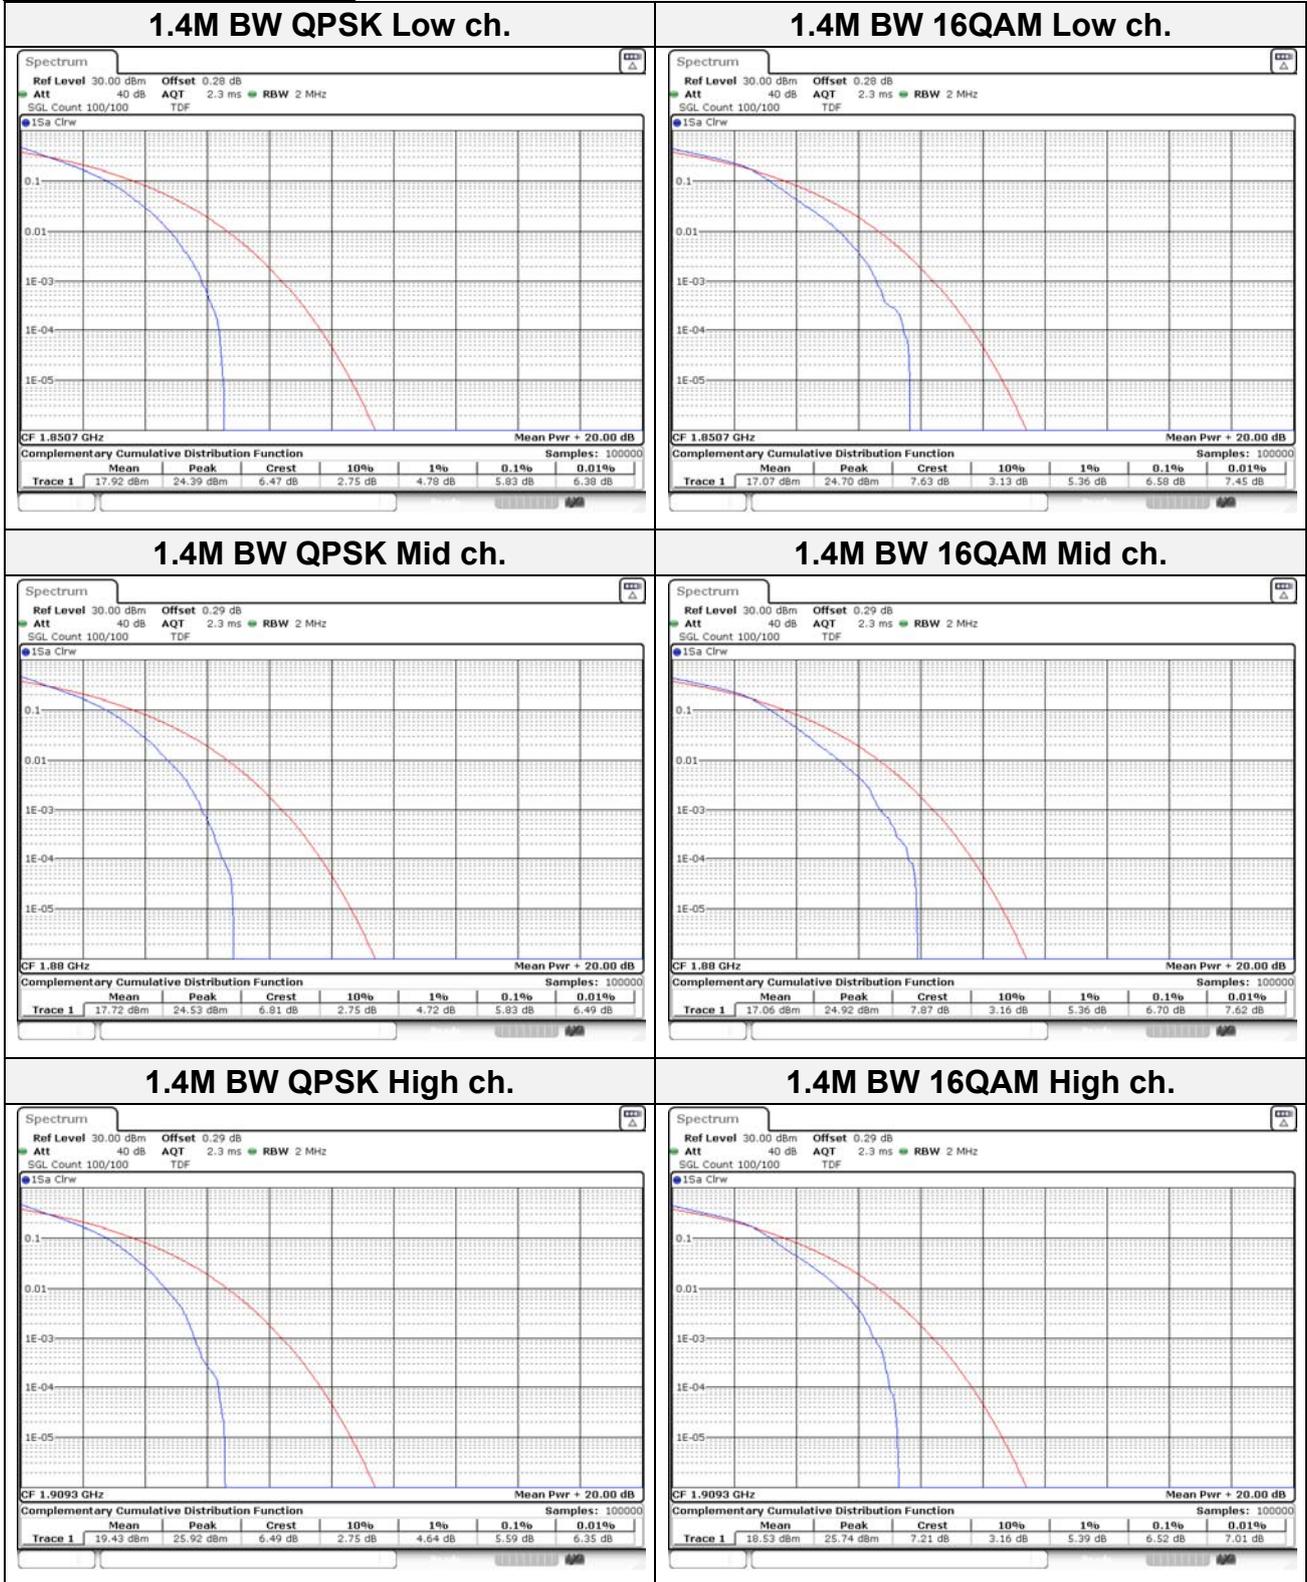


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (179) of (220)




3M BW QPSK Low ch.

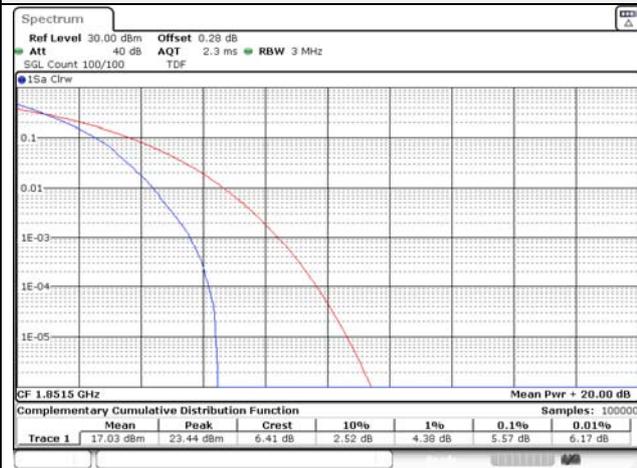


3M BW 16QAM Low ch.

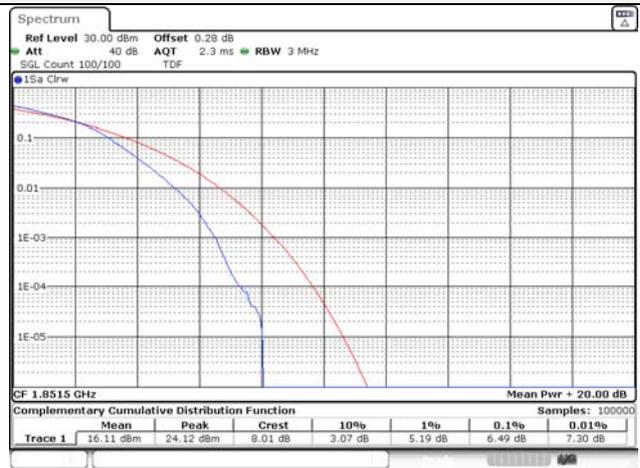


3M BW QPSK Mid ch.

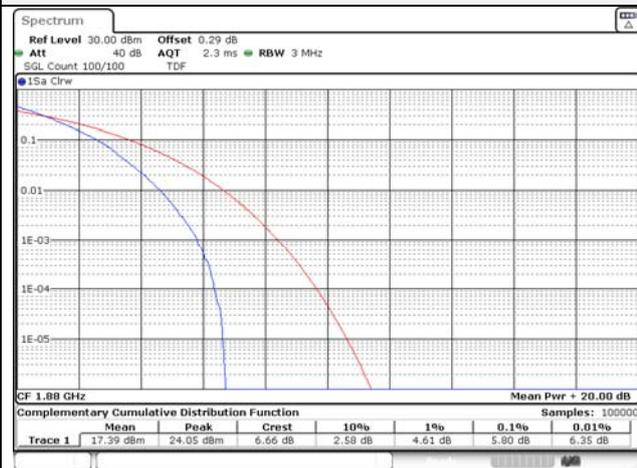


3M BW 16QAM Mid ch.

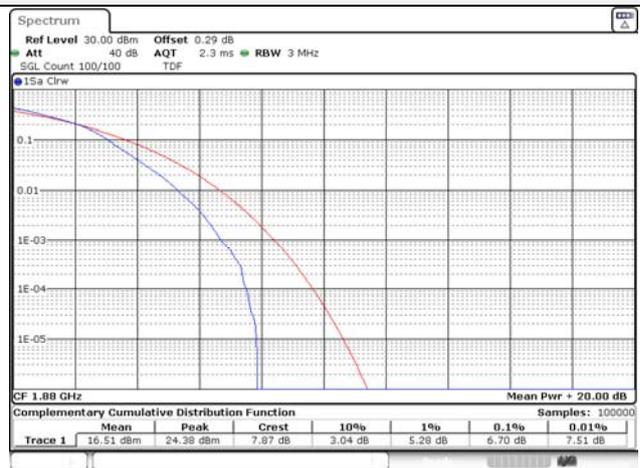

3M BW QPSK High ch.

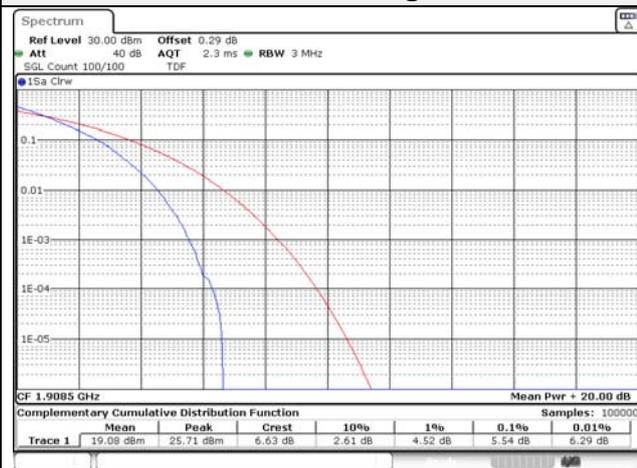

3M BW 16QAM High ch.

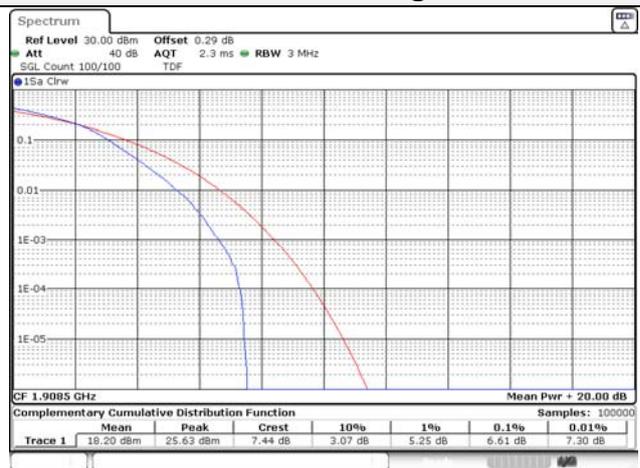


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (180) of (220)




5M BW QPSK Low ch.

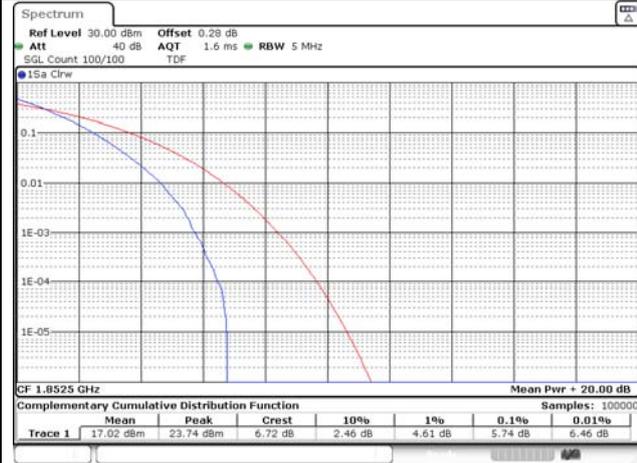

5M BW 16QAM Low ch.

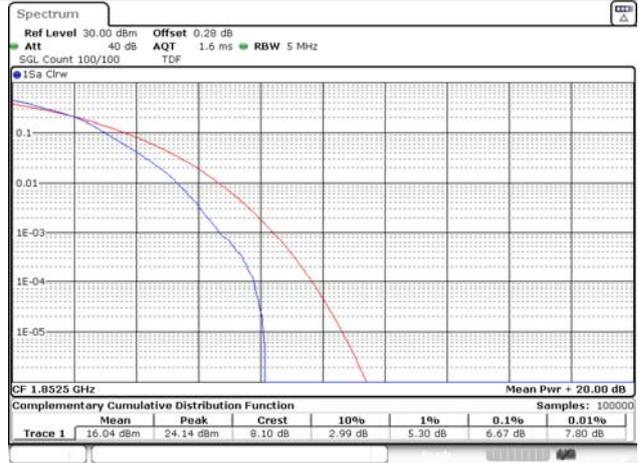


5M BW QPSK Mid ch.

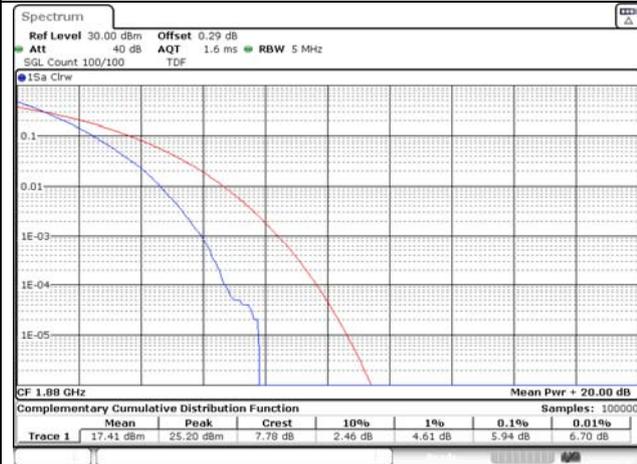

5M BW 16QAM Mid ch.



5M BW QPSK High ch.

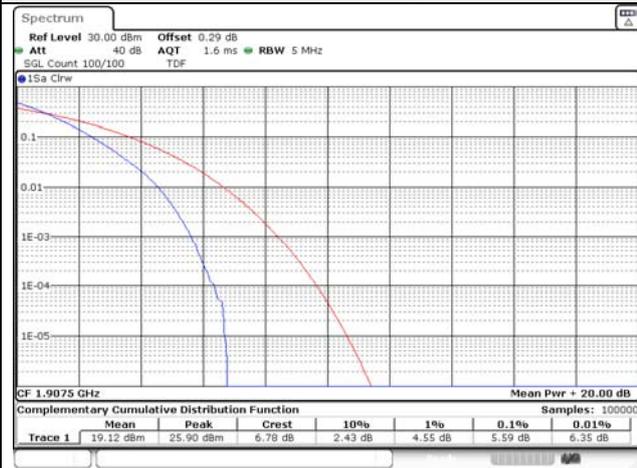

5M BW 16QAM High ch.




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (181) of (220)




10M BW QPSK Low ch.

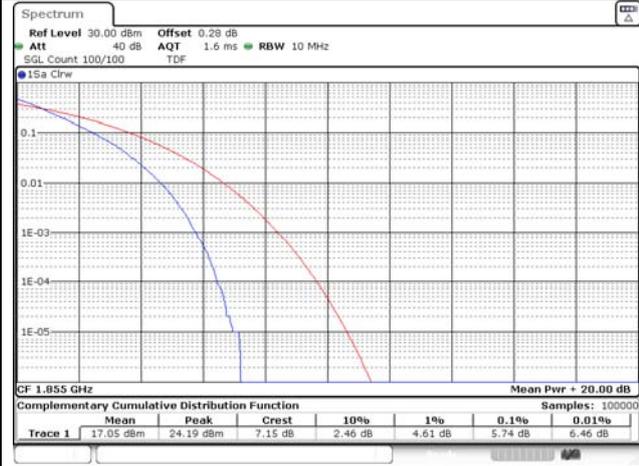


10M BW 16QAM Low ch.

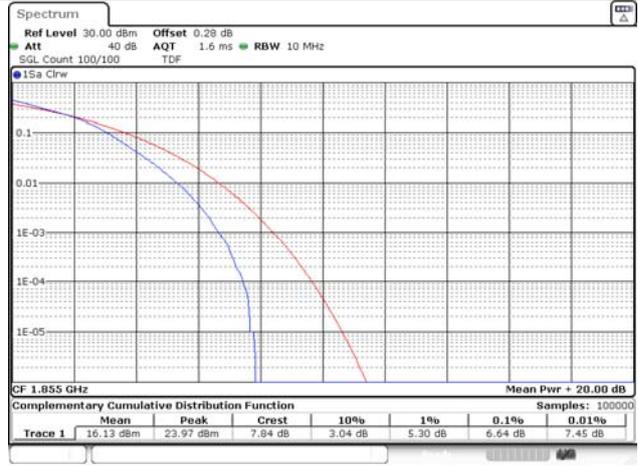


10M BW QPSK Mid ch.

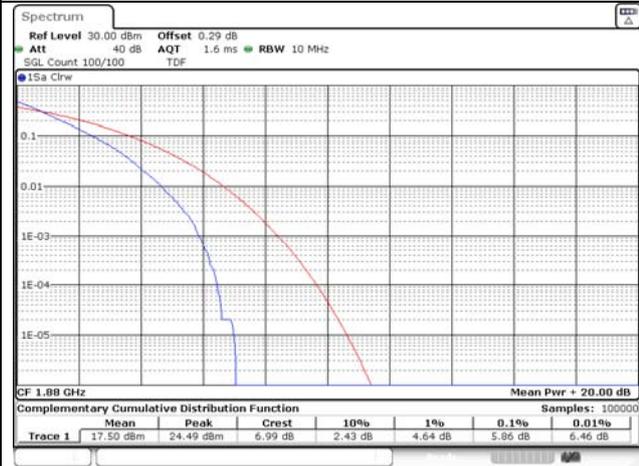

10M BW 16QAM Mid ch.

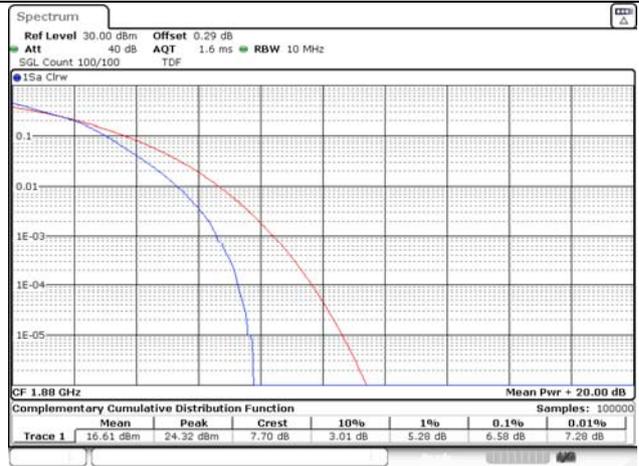

10M BW QPSK High ch.

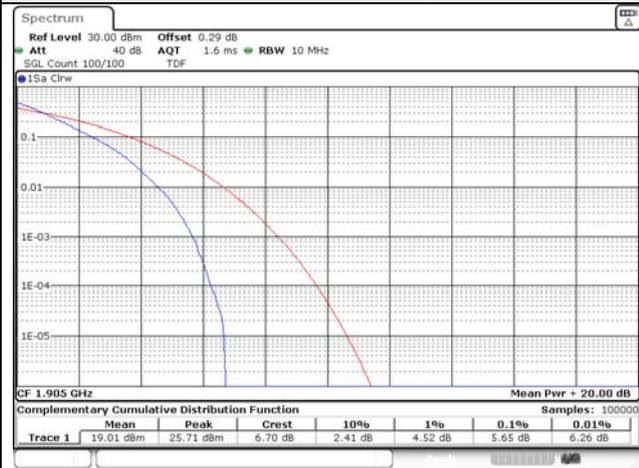

10M BW 16QAM High ch.




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (182) of (220)




15M BW QPSK Low ch.

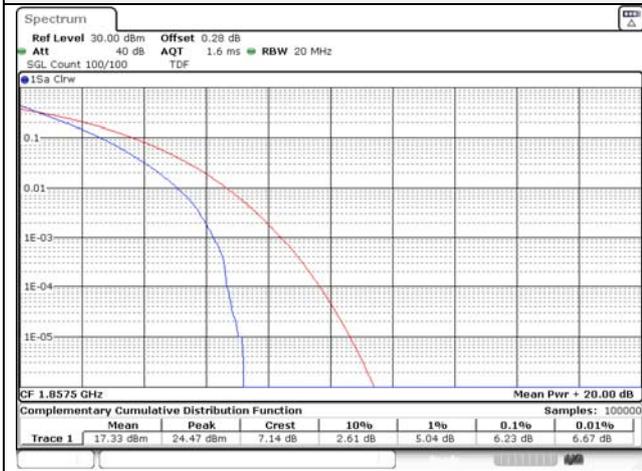


15M BW 16QAM Low ch.

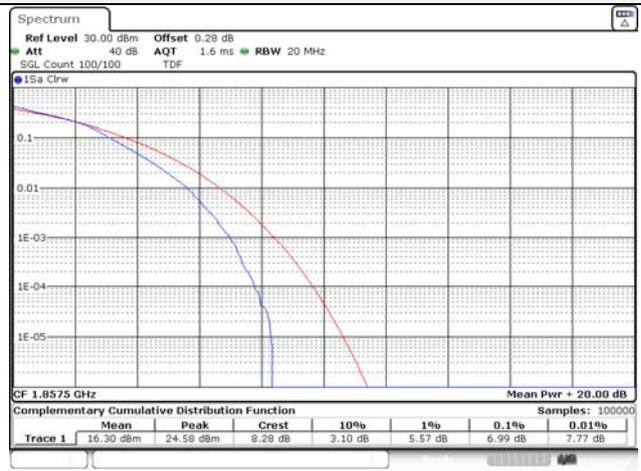


15M BW QPSK Mid ch.

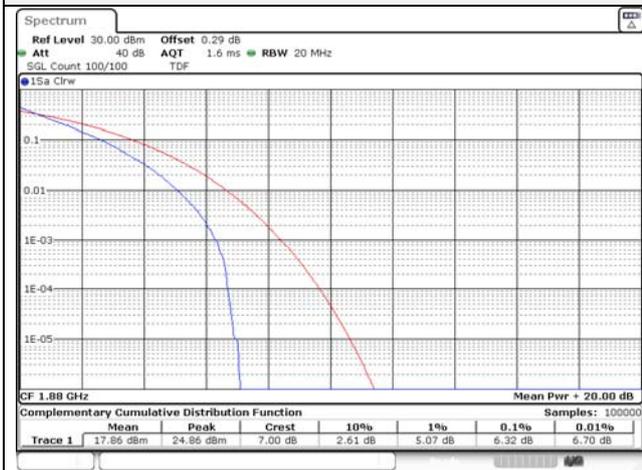


15M BW 16QAM Mid ch.

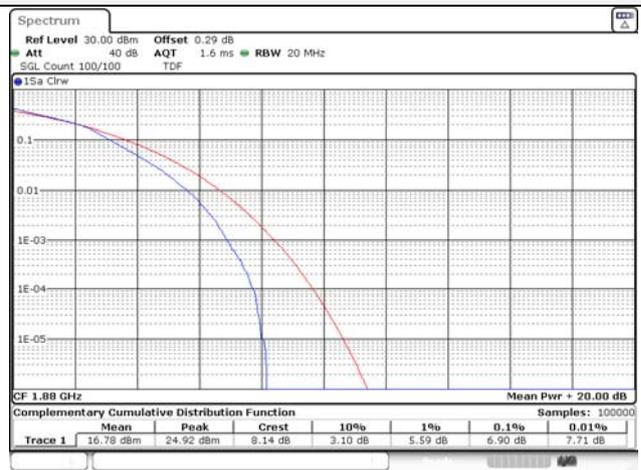

15M BW QPSK High ch.

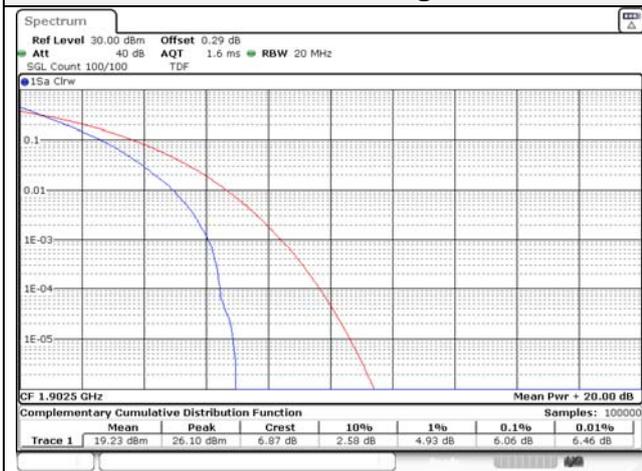

15M BW 16QAM High ch.

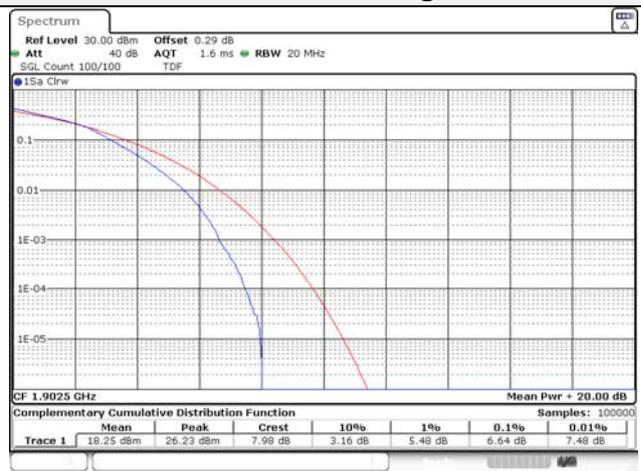


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (183) of (220)




20M BW QPSK Low ch.

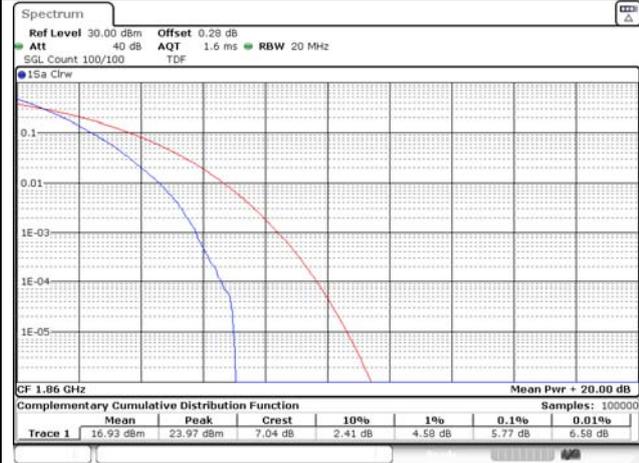

20M BW 16QAM Low ch.

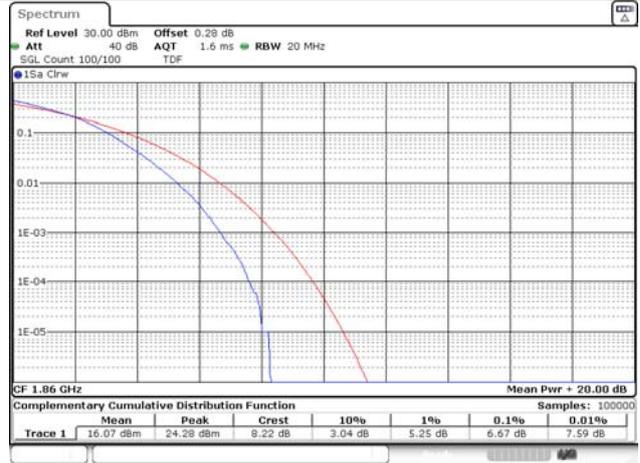


20M BW QPSK / Mid ch.

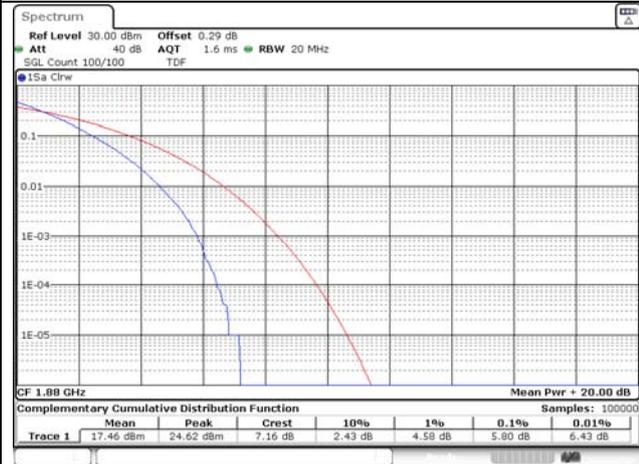


20M BW 16QAM Mid ch.



20M BW QPSK / High ch.

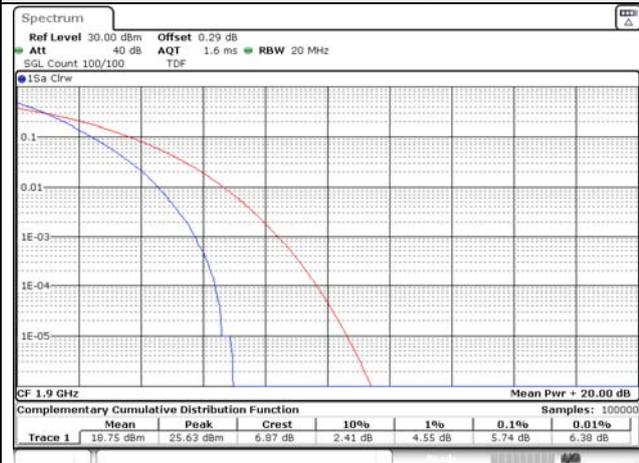


20M BW 16QAM High ch.

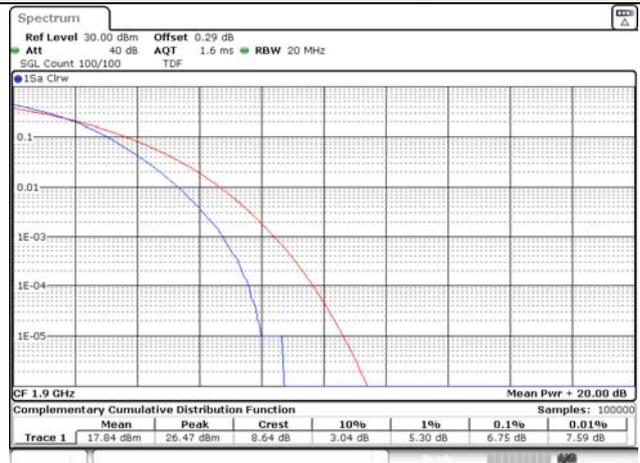


Test mode: LTE Band 41


5M BW QPSK Low ch.

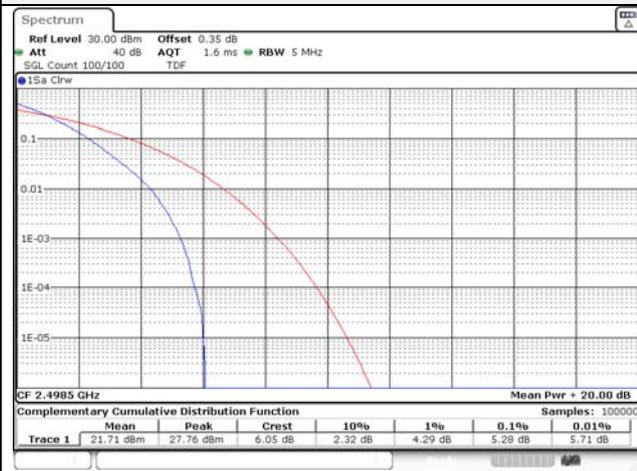


5M BW 16QAM Low ch.

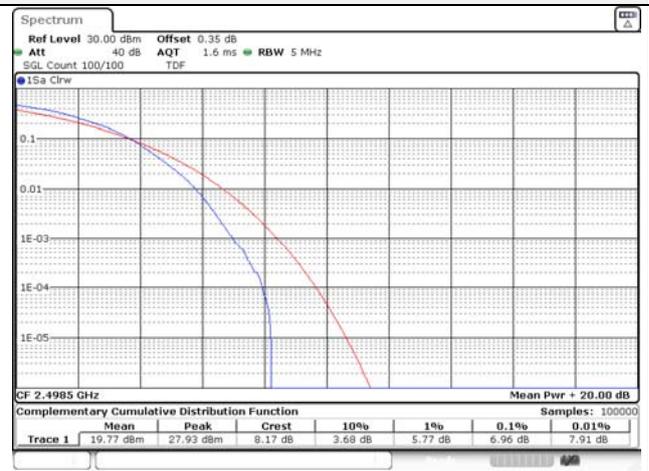


5M BW QPSK Mid ch.

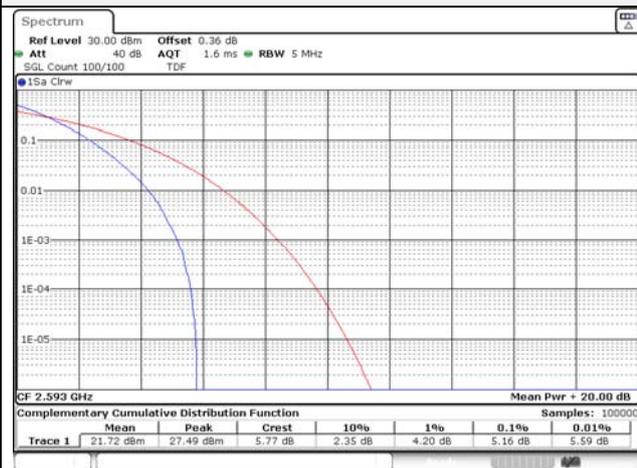


5M BW 16QAM Mid ch.

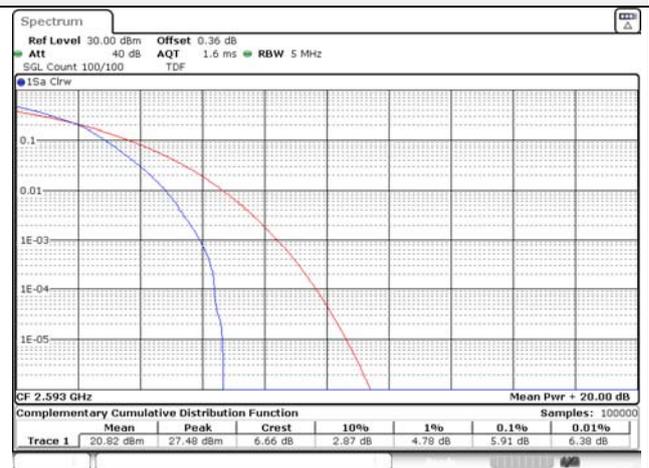

5M BW QPSK High ch.

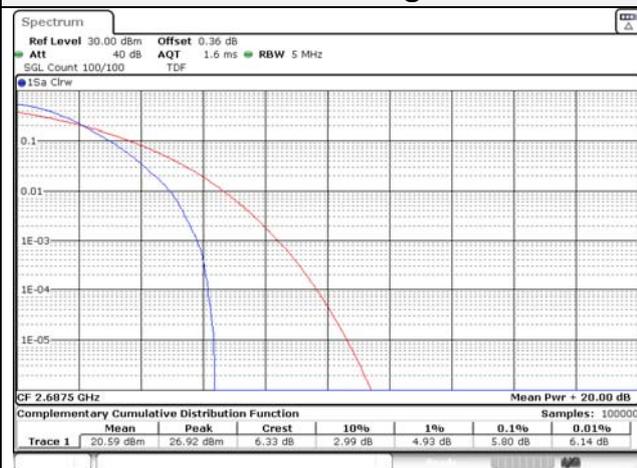

5M BW 16QAM High ch.

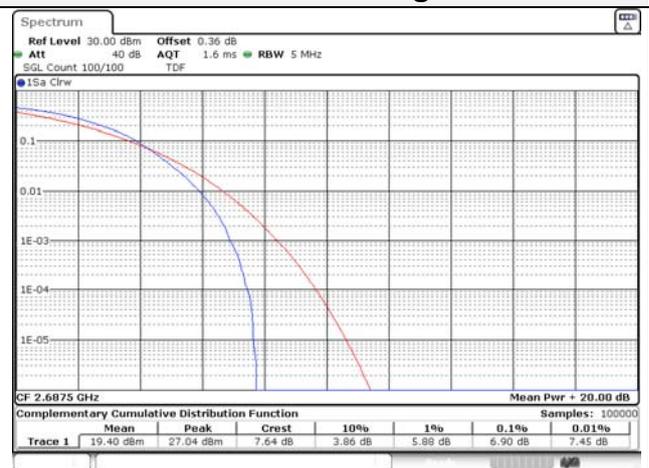


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (185) of (220)




10M BW QPSK Low ch.

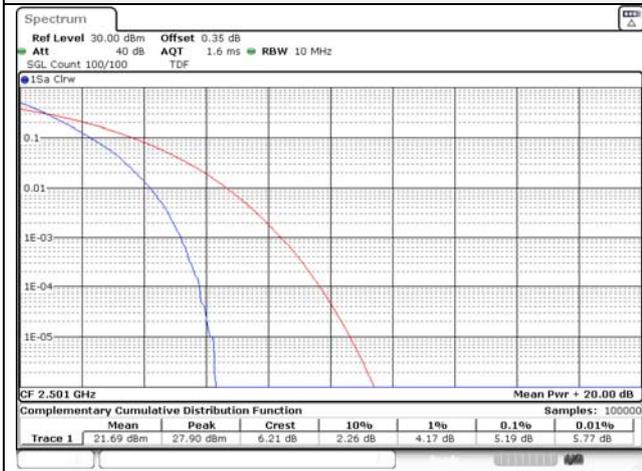


10M BW 16QAM Low ch.




10M BW QPSK Mid ch.

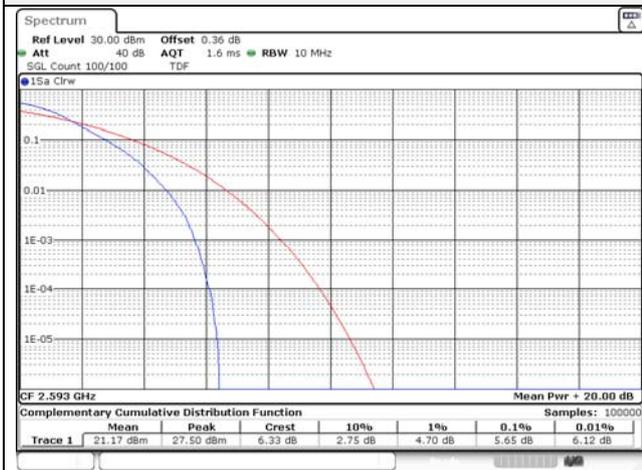


10M BW 16QAM Mid ch.

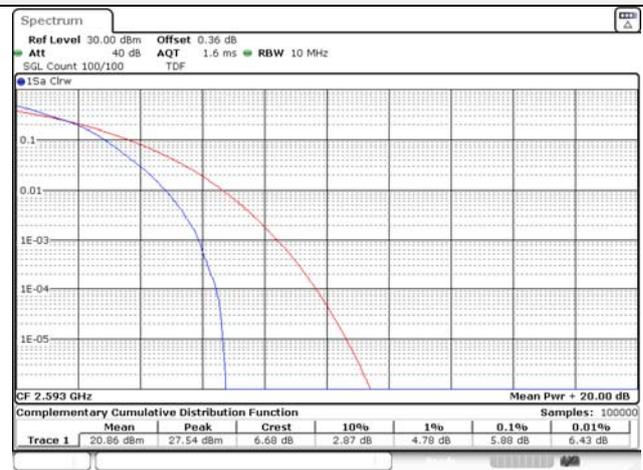

10M BW QPSK High ch.

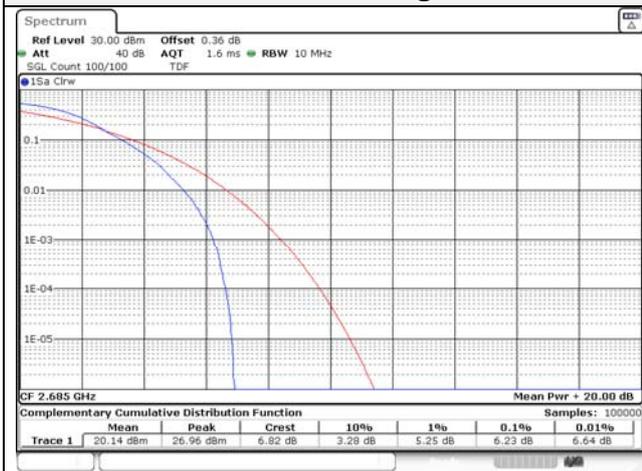

10M BW 16QAM High ch.

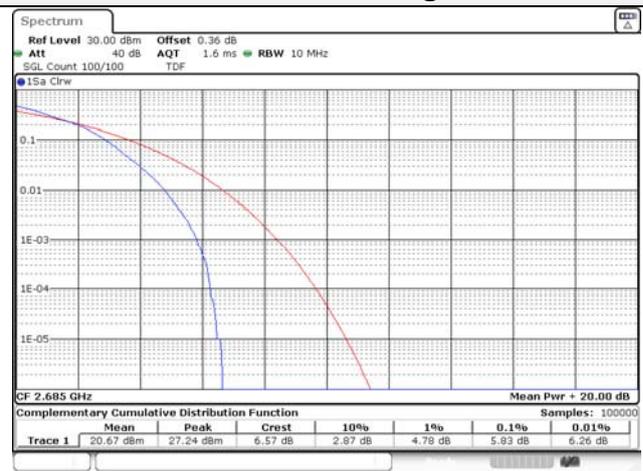


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (186) of (220)




15M BW QPSK Low ch.

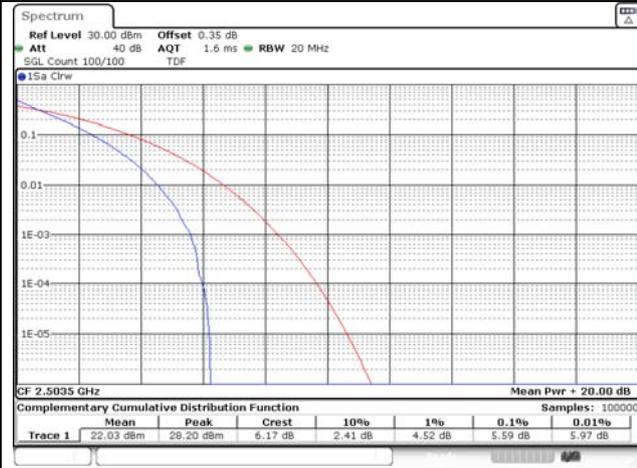


15M BW 16QAM Low ch.

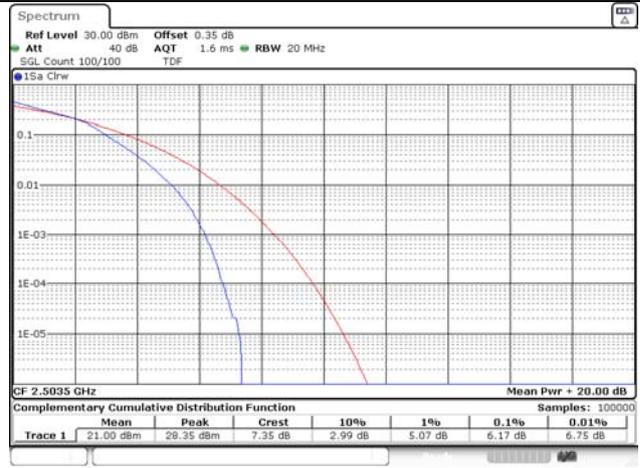

15M BW QPSK Mid ch.

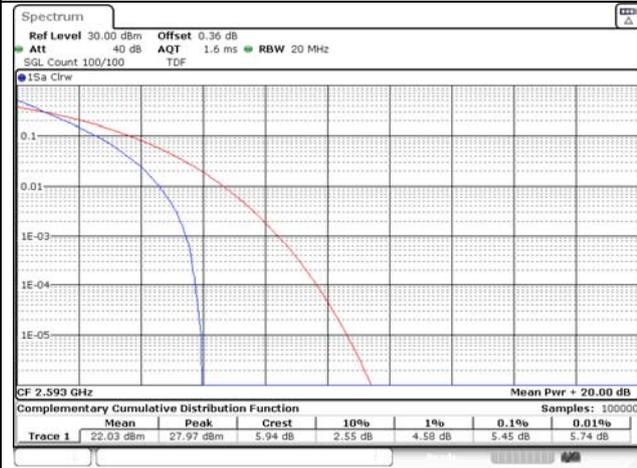


15M BW 16QAM Mid ch.

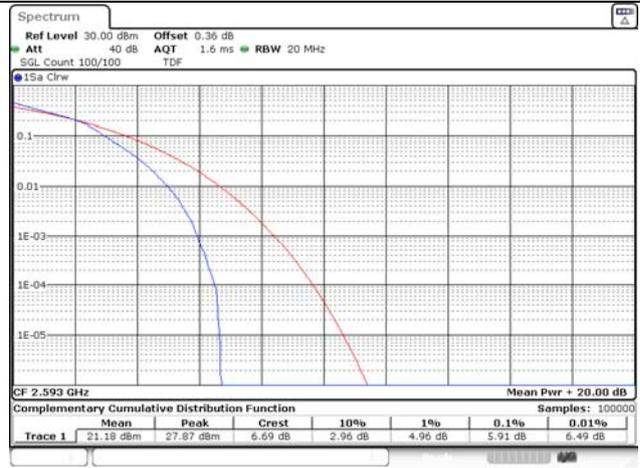

15M BW QPSK High ch.



15M BW 16QAM High ch.

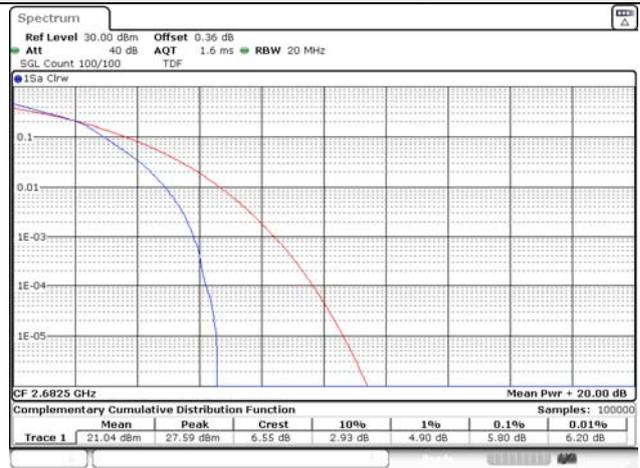


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (187) of (220)




20M BW QPSK Low ch.

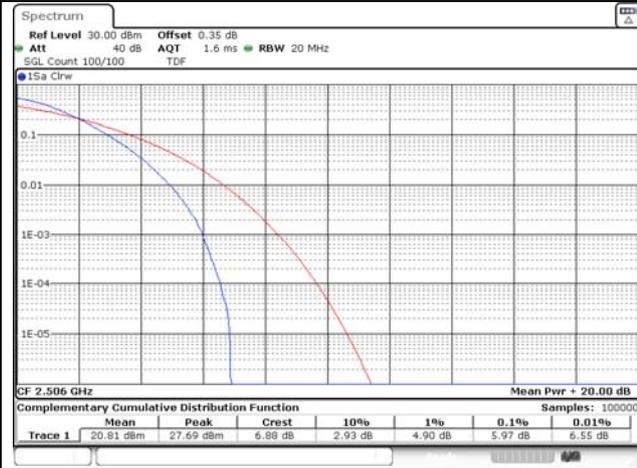


20M BW 16QAM Low ch.

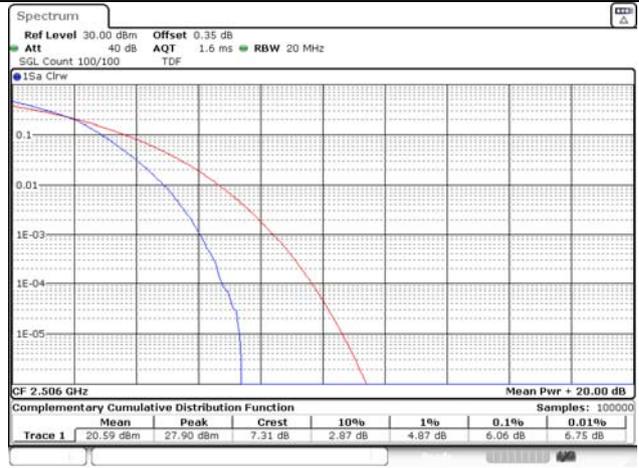


20M BW QPSK Mid ch.

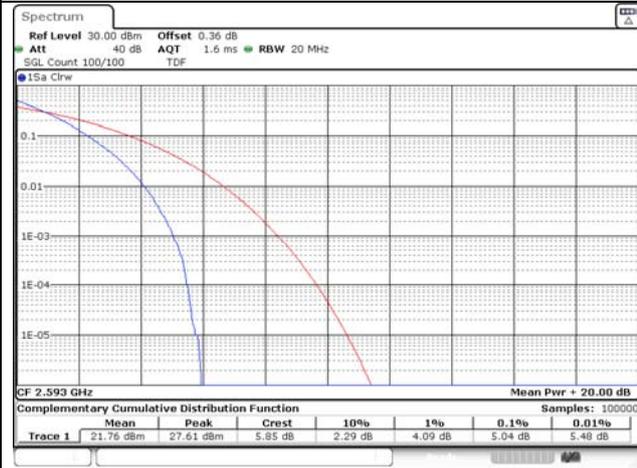


20M BW 16QAM Mid ch.

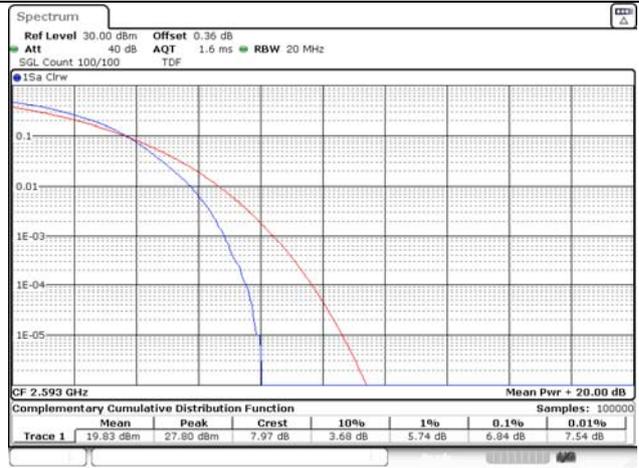

20M BW QPSK High ch.

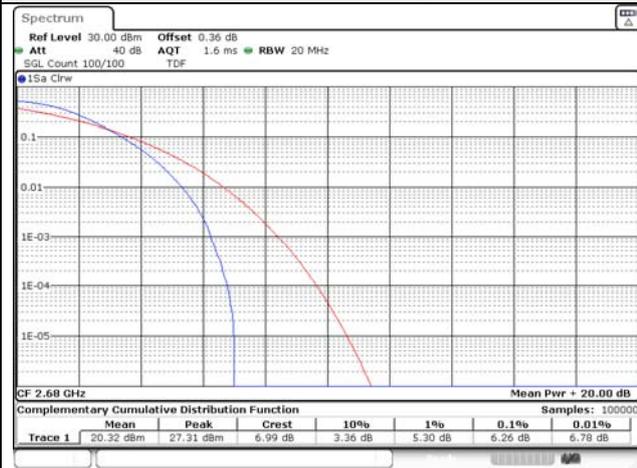


20M BW 16QAM High ch.

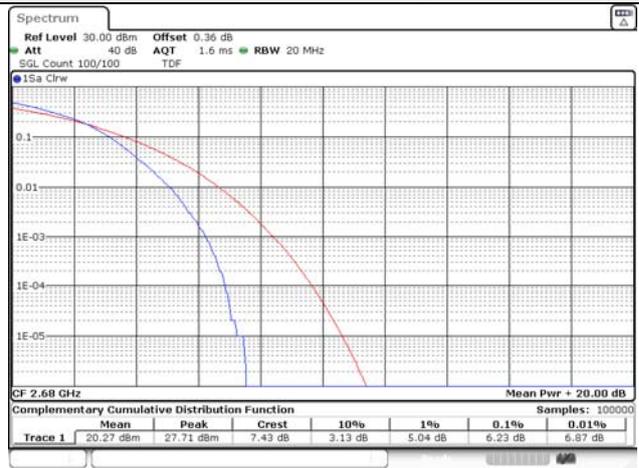


Test mode: LTE Band 66/4


1.4M BW QPSK Low ch.

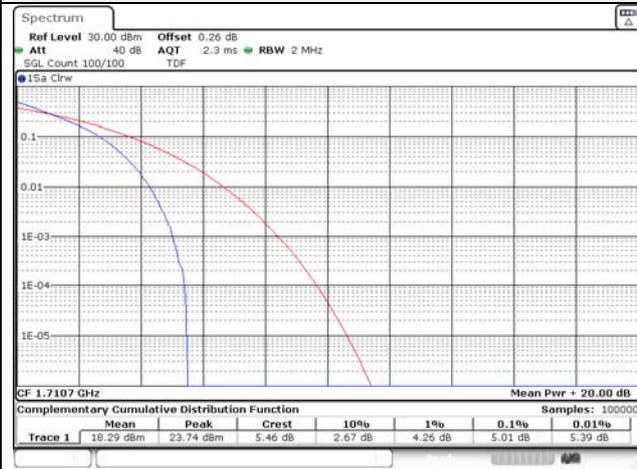


1.4M BW 16QAM Low ch.

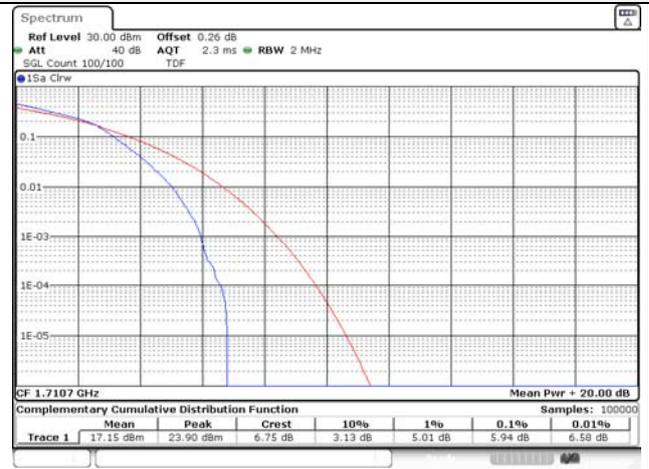


1.4M BW QPSK Mid ch.

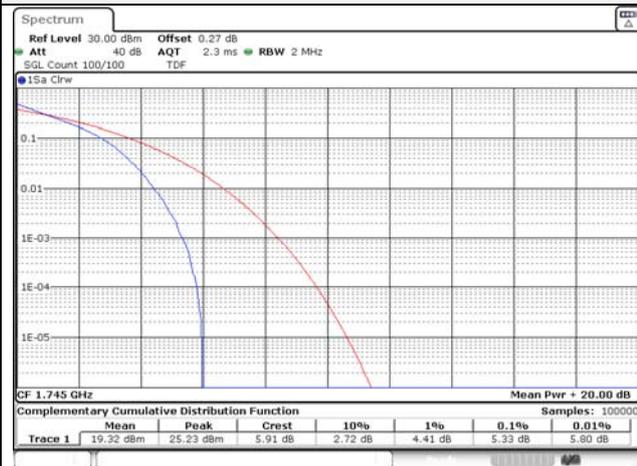


1.4M BW 16QAM Mid ch.

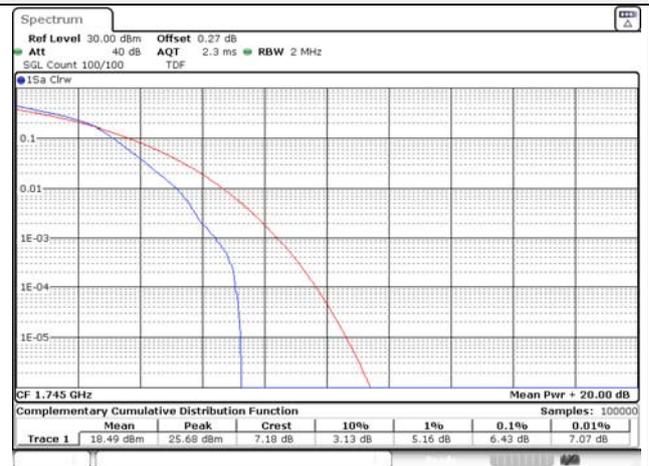

1.4M BW QPSK High ch.

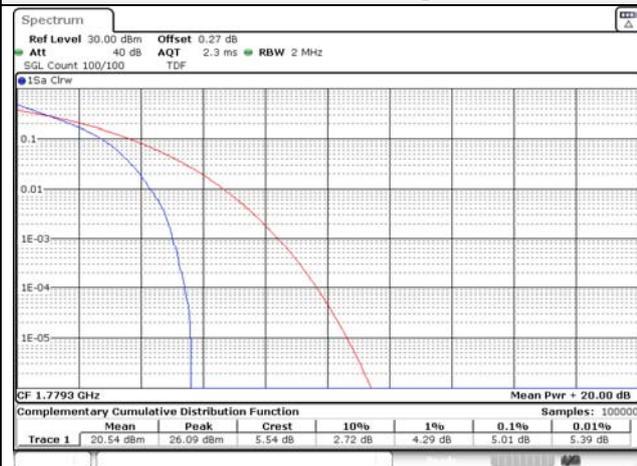

1.4M BW 16QAM High ch.

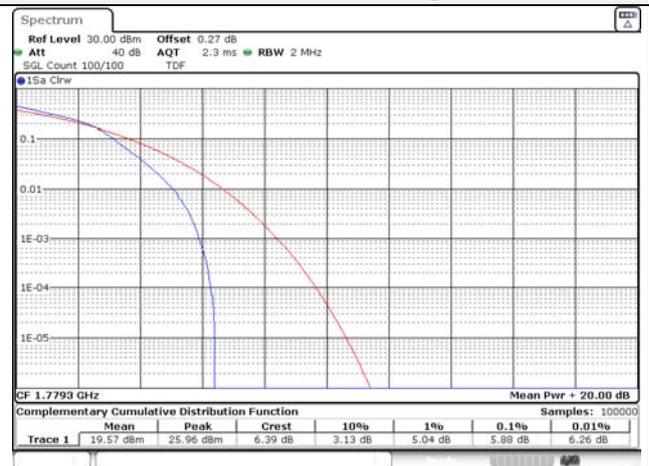


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (189) of (220)




3M BW QPSK Low ch.

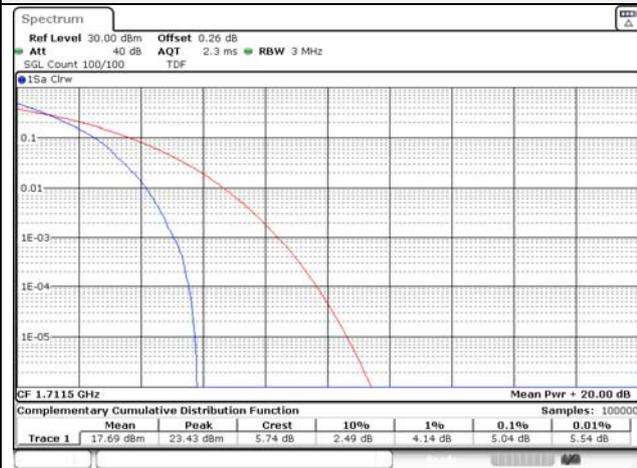

3M BW 16QAM Low ch.

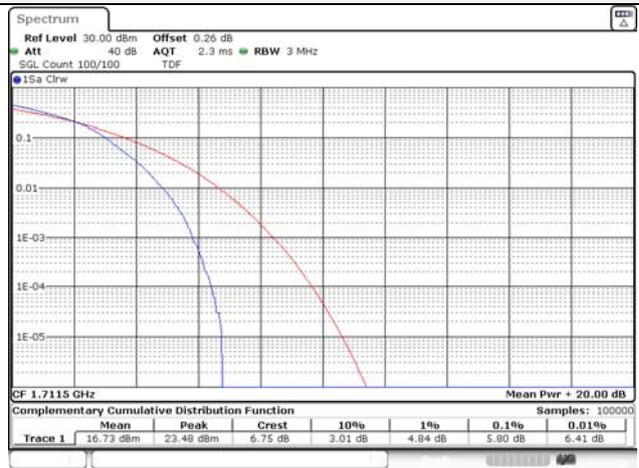


3M BW QPSK Mid ch.

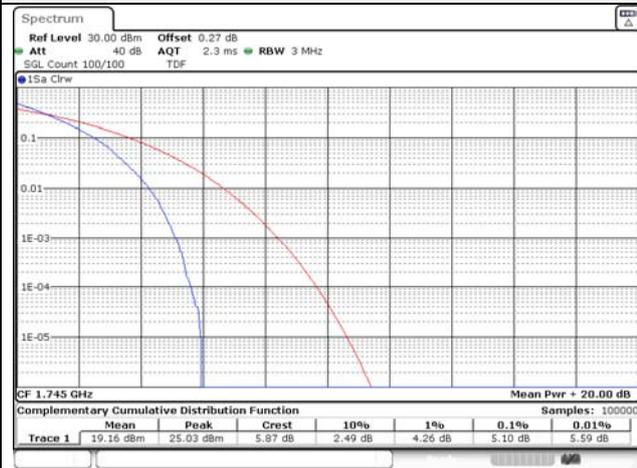

3M BW 16QAM Mid ch.



3M BW QPSK High ch.

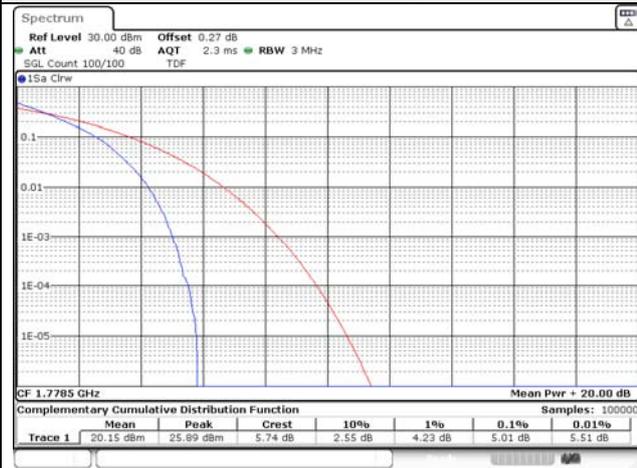

3M BW 16QAM High ch.




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (190) of (220)




5M BW QPSK Low ch.

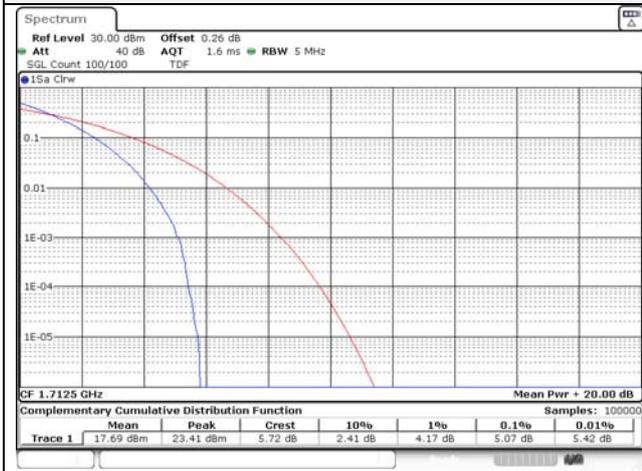


5M BW 16QAM Low ch.

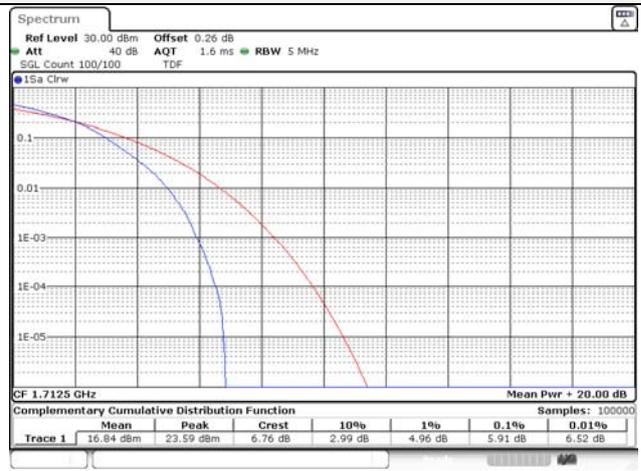


5M BW QPSK Mid ch.

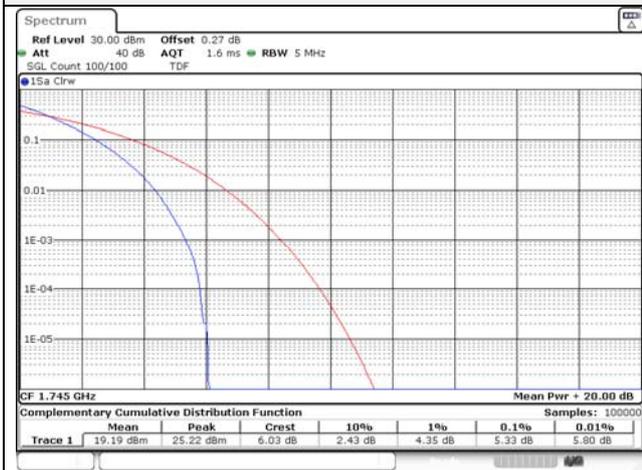


5M BW 16QAM Mid ch.

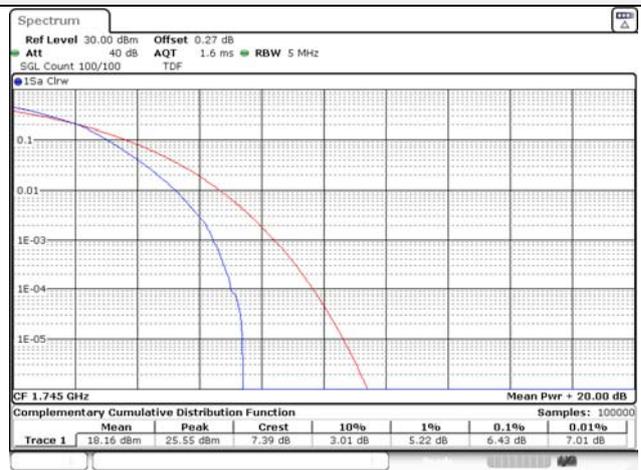

5M BW QPSK High ch.

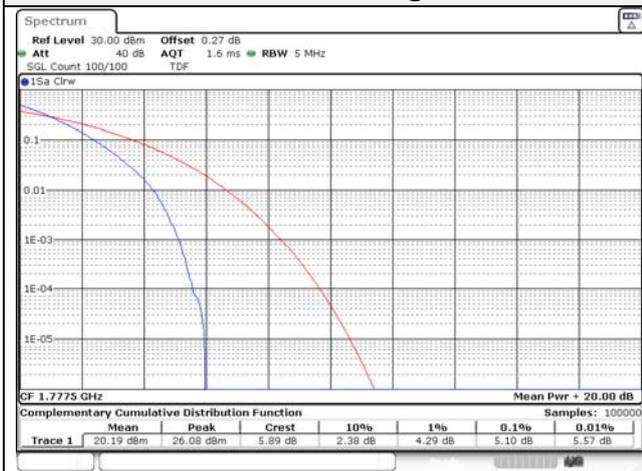

5M BW 16QAM High ch.

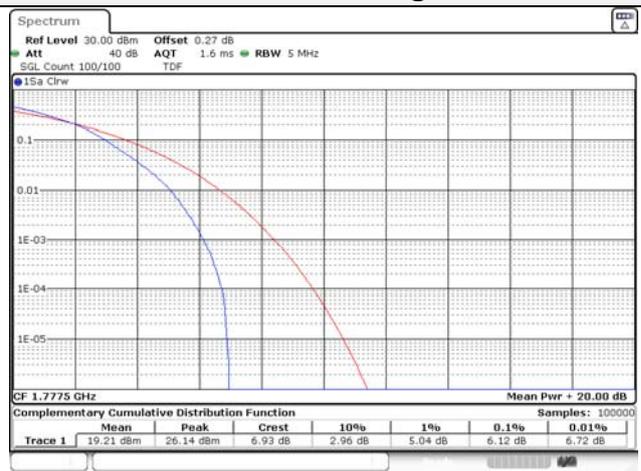


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (191) of (220)




10M BW QPSK Low ch.

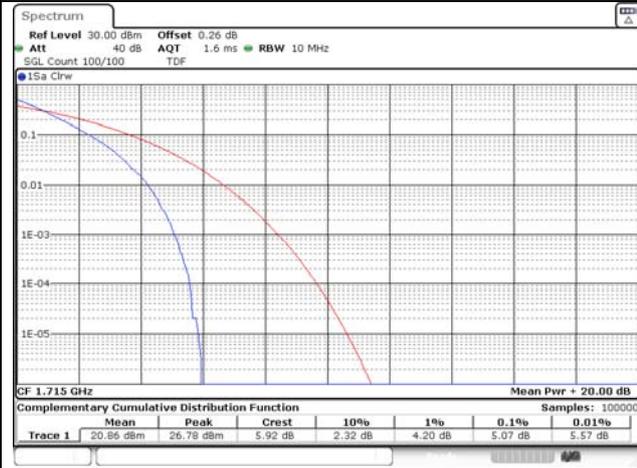


10M BW 16QAM Low ch.

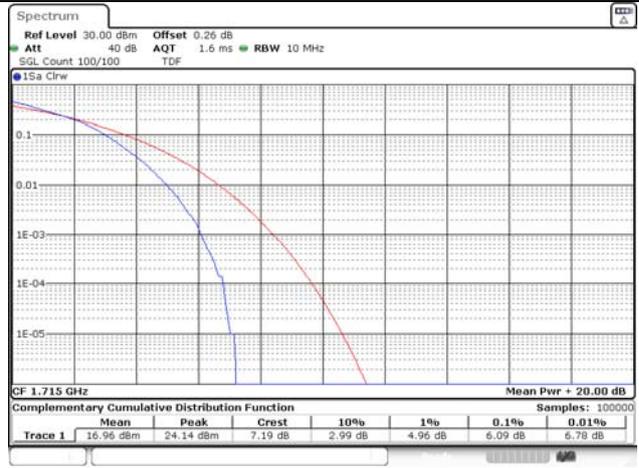


10M BW QPSK Mid ch.

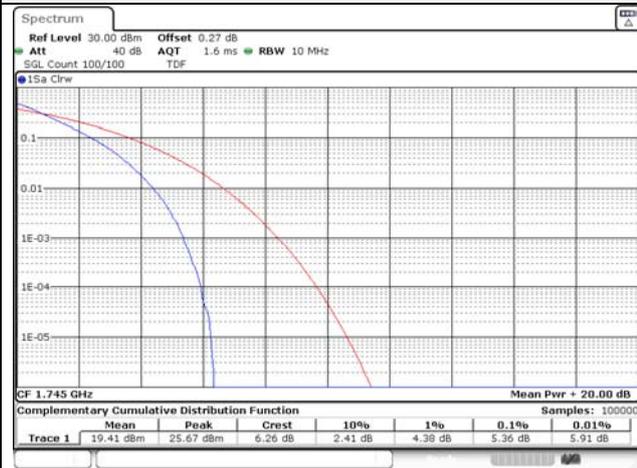

10M BW 16QAM Mid ch.

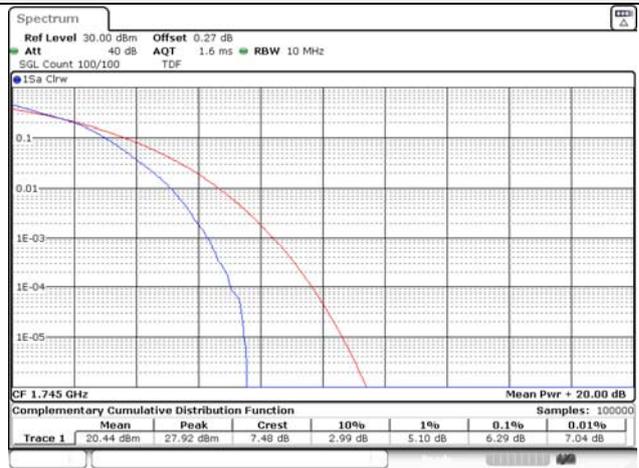

10M BW QPSK High ch.

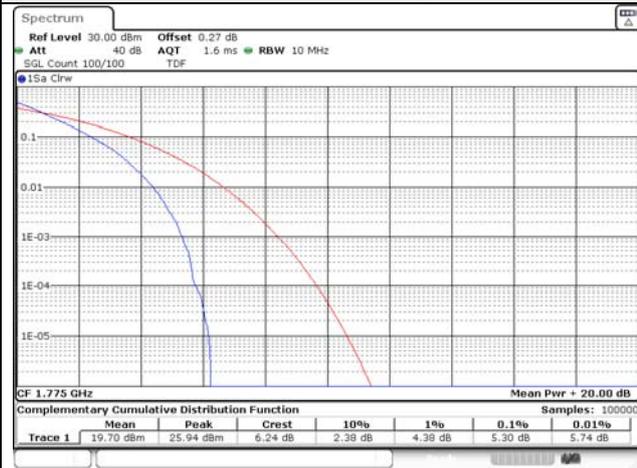

10M BW 16QAM High ch.




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (192) of (220)




15M BW QPSK Low ch.

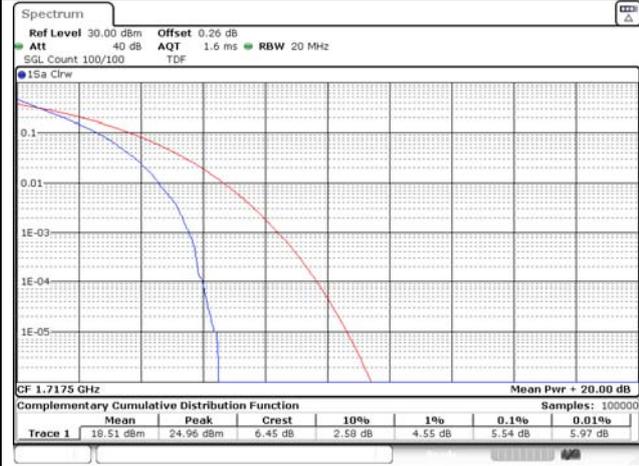


15M BW 16QAM Low ch.

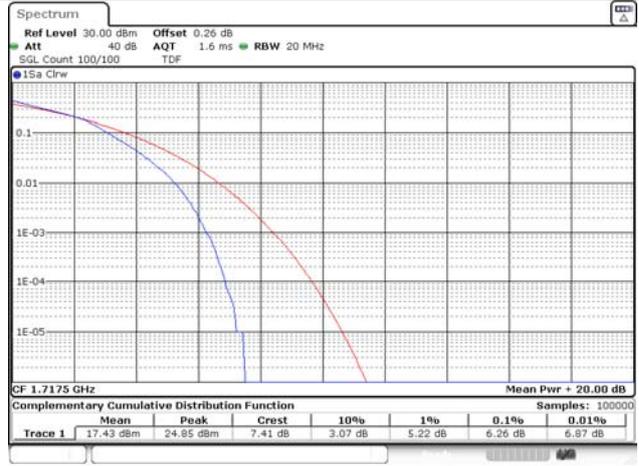


15M BW QPSK Mid ch.

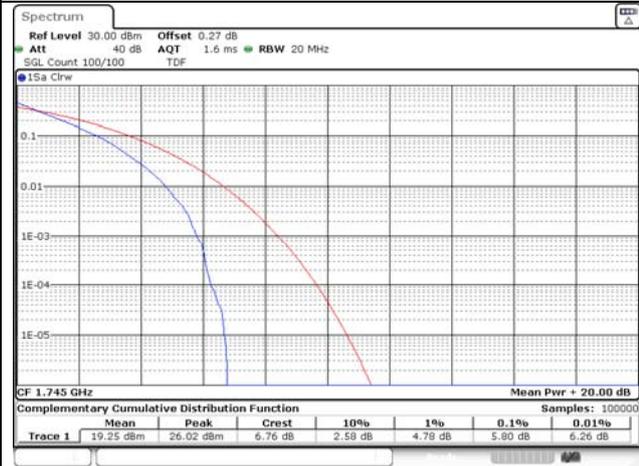

15M BW 16QAM Mid ch.

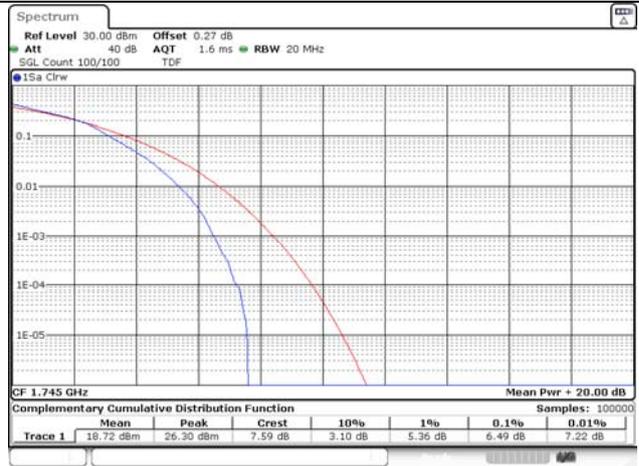

15M BW QPSK High ch.

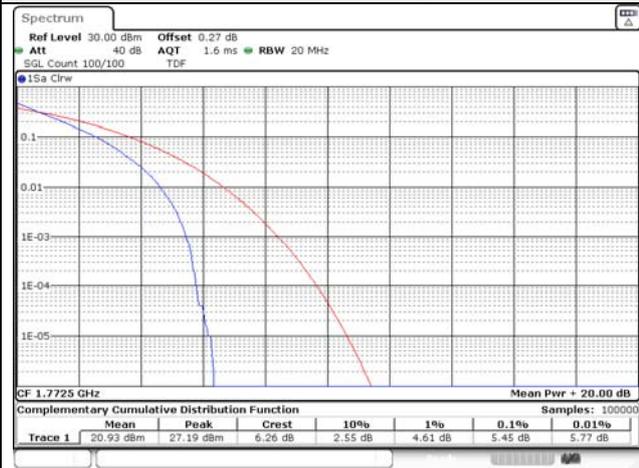

15M BW 16QAM High ch.




KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (193) of (220)




20M BW QPSK Low ch.

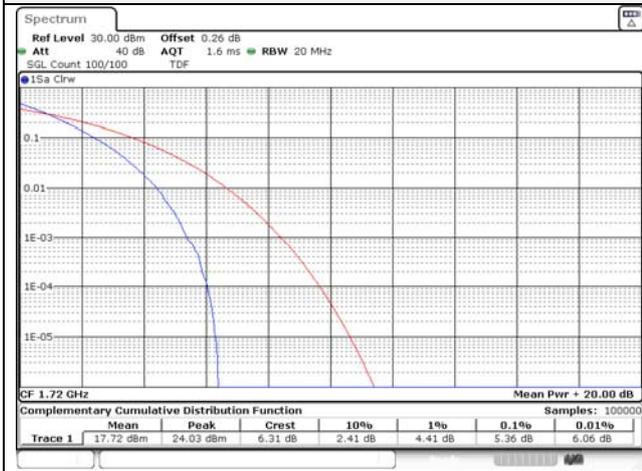

20M BW 16QAM Low ch.




20M BW QPSK Mid ch.

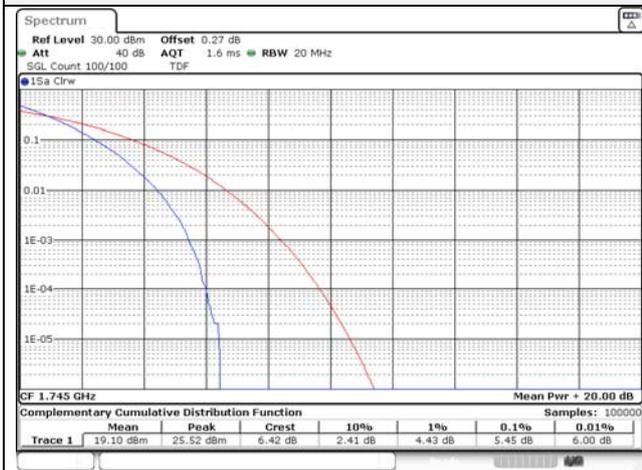

20M BW 16QAM Mid ch.



20M BW QPSK High ch.

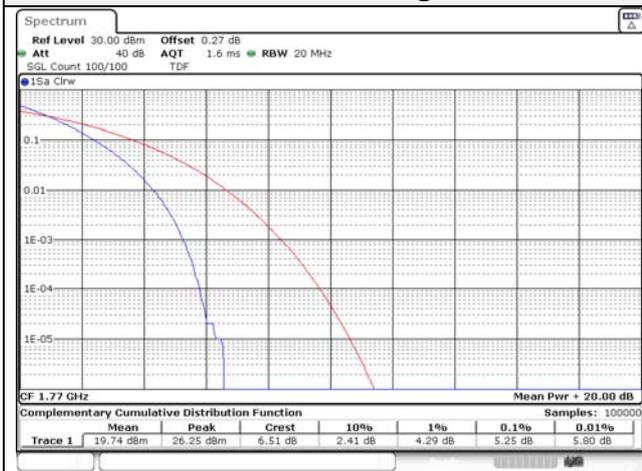


20M BW 16QAM High ch.



7.6. Frequency stability

Test setup

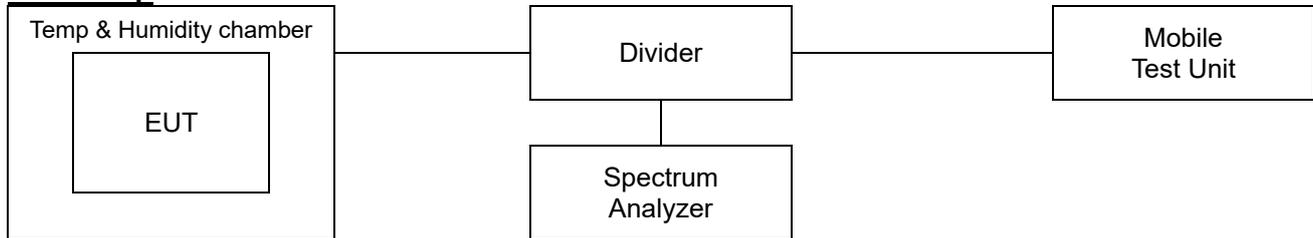

Limit

According to §2.1055(a),

The frequency stability shall be measured with variation of ambient temperature as follows:

- 1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- 2) From -20° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the maritime services under part 80 of this chapter, except for class A, B, and S emergency position indicating radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the local television transmission service and point-to-point microwave radio service under part 21 of this chapter, equipment licensed for use aboard aircraft in the aviation services under part 87 of this chapter, and equipment authorized for use in the family radio service under part 95 of this chapter.
- 3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the radio broadcast Services under part 73 of this chapter.

According to §2.1055(d),

The frequency stability shall be measured with variation of primary supply Voltage as follows:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- 3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

According to §22.355,

The carrier frequency of each transmitter in the public mobile services must be maintained within the tolerances given in Table of this section.

For mobile devices operating in the 824 to 849 MHz band at a power level than or equal to 3 Watts, the limit specified in Table C-1 is ± 2.5 ppm.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (195) of (220)

**According to §24.235,**

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

The carrier frequency shall not depart from the reference frequency, in excess of ± 2.5 ppm for mobile stations and ± 1.0 ppm for base stations.

According to §27.54,

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block (bands of operation).

Test procedure

ANSI 63.26-2015 – Section 5.6

Test settings

- 1) The carrier frequency of the transmitter is measured at room temperature.
(20°C to provide a reference)
- 2) The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3) Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each Temperature level.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR21-SRF0140
Page (196) of (220)



Test results

Test mode : LTE Band 2
Frequency (Hz) : 1 880 000 000
Channel : 18900
Deviation limit(FCC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.86	+22(Ref)	1,879,999,987	-13.02	0.0	-0.000001
		-30	1,879,999,988	-11.56	0.0	-0.000001
		-20	1,879,999,994	-5.88	0.0	0.000000
		-10	1,879,999,989	-11.07	0.0	-0.000001
		0	1,879,999,989	-10.75	0.0	-0.000001
		+10	1,879,999,993	-6.83	0.0	0.000000
		+20	1,879,999,989	-10.87	0.0	-0.000001
		+30	1,879,999,992	-8.31	0.0	0.000000
		+40	1,879,999,988	-11.68	0.0	-0.000001
		+50	1,879,999,992	-8.23	0.0	0.000000
115%	4.44	+22(Ref)	1,879,999,994	-5.85	0.0	0.000000
End point	3.45	+22(Ref)	1,879,999,989	-10.66	0.0	-0.000001

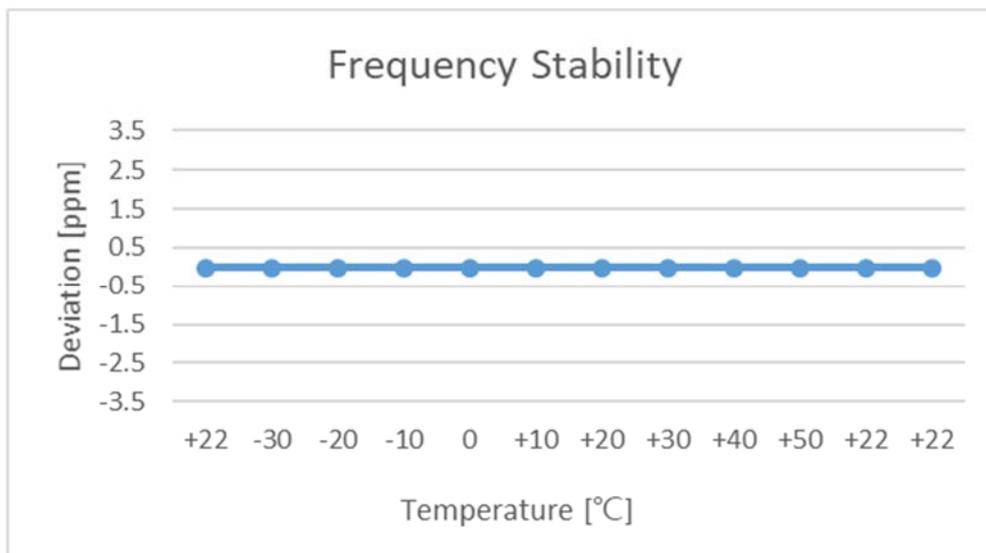

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (197) of (220)



Test mode : LTE Band 5
Frequency (Hz) : 836 500 000
Channel : 20525
Deviation limit : ±0.00025% or 2.5ppm

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.86	+22(Ref)	836,499,994	-6.24	0.0	-0.000001
		-30	836,499,992	-7.90	0.0	-0.000001
		-20	836,499,989	-11.16	0.0	-0.000001
		-10	836,499,989	-11.26	0.0	-0.000001
		0	836,499,990	-9.61	0.0	-0.000001
		+10	836,499,991	-9.26	0.0	-0.000001
		+20	836,499,993	-6.69	0.0	-0.000001
		+30	836,499,992	-8.28	0.0	-0.000001
		+40	836,499,990	-9.71	0.0	-0.000001
		+50	836,499,991	-8.89	0.0	-0.000001
115%	4.44	+22(Ref)	836,499,993	-7.41	0.0	-0.000001
End point	3.45	+22(Ref)	836,499,988	-12.46	0.0	-0.000001

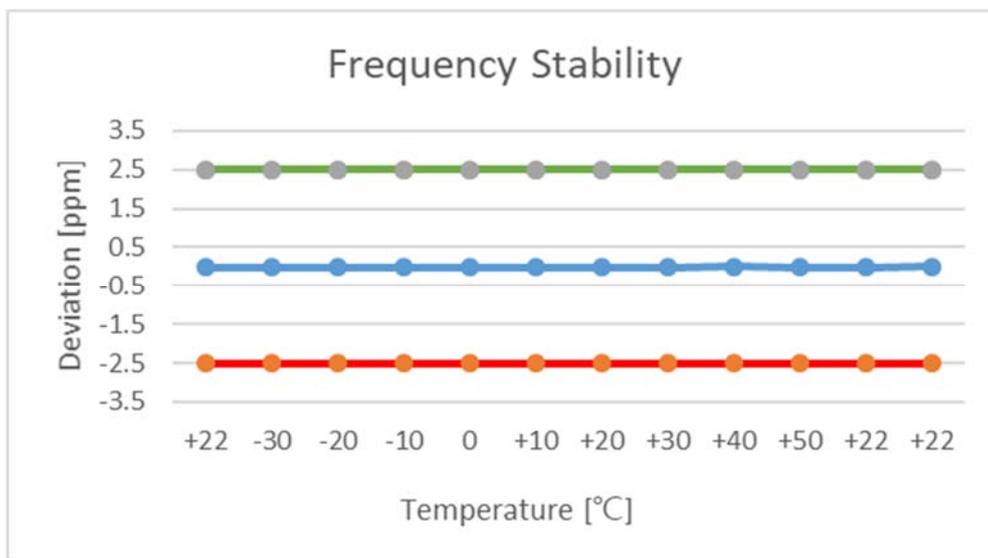

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (198) of (220)



Test mode : LTE Band 12/17
 Frequency (Hz) : 707 500 000
 Channel : 23095
 Deviation limit(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized bands of operation

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.86	+22(Ref)	707,499,997	-3.50	0.0	0.000000
		-30	707,499,995	-4.76	0.0	-0.000001
		-20	707,499,998	-2.16	0.0	0.000000
		-10	707,499,995	-4.99	0.0	-0.000001
		0	707,499,997	-3.27	0.0	0.000000
		+10	707,499,996	-3.57	0.0	-0.000001
		+20	707,499,997	-3.24	0.0	0.000000
		+30	707,499,996	-3.70	0.0	-0.000001
		+40	707,499,995	-4.93	0.0	-0.000001
		+50	707,499,995	-4.67	0.0	-0.000001
115%	4.44	+22(Ref)	707,499,995	-5.18	0.0	-0.000001
End point	3.45	+22(Ref)	707,499,998	-2.03	0.0	0.000000

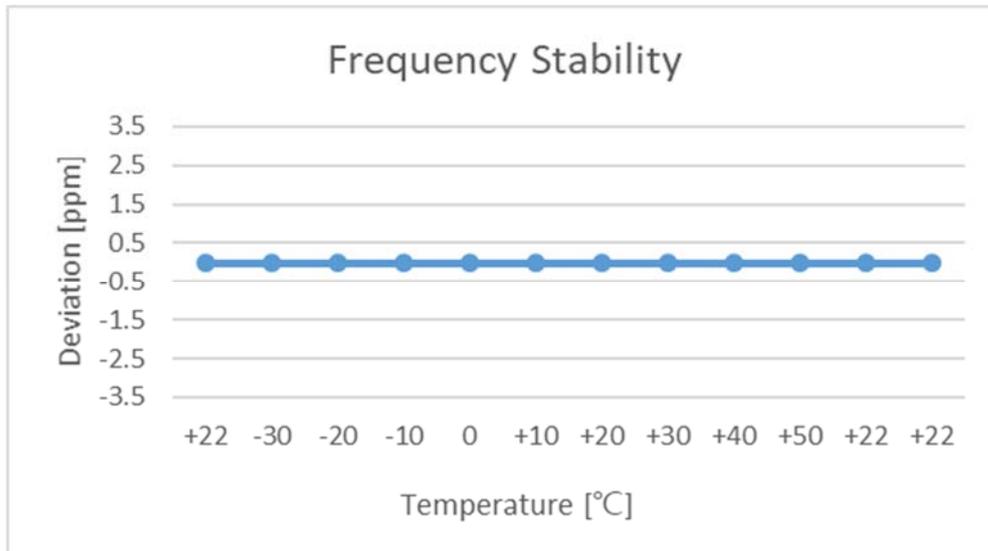

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (199) of (220)



Test mode : LTE Band 26
Frequency (Hz) : 836 500 000
Channel : 26915
Deviation limit : ±0.00025% or 2.5ppm

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.86	+22(Ref)	836,499,991	-9.41	0.0	-0.000001
		-30	836,499,992	-8.50	0.0	-0.000001
		-20	836,499,994	-5.66	0.0	-0.000001
		-10	836,499,993	-6.63	0.0	-0.000001
		0	836,499,996	-4.02	0.0	0.000000
		+10	836,499,991	-9.36	0.0	-0.000001
		+20	836,499,995	-5.49	0.0	-0.000001
		+30	836,499,995	-5.38	0.0	-0.000001
		+40	836,499,992	-8.01	0.0	-0.000001
		+50	836,499,991	-8.93	0.0	-0.000001
115%	4.44	+22(Ref)	836,499,997	-3.26	0.0	0.000000
End point	3.45	+22(Ref)	836,499,997	-3.38	0.0	0.000000

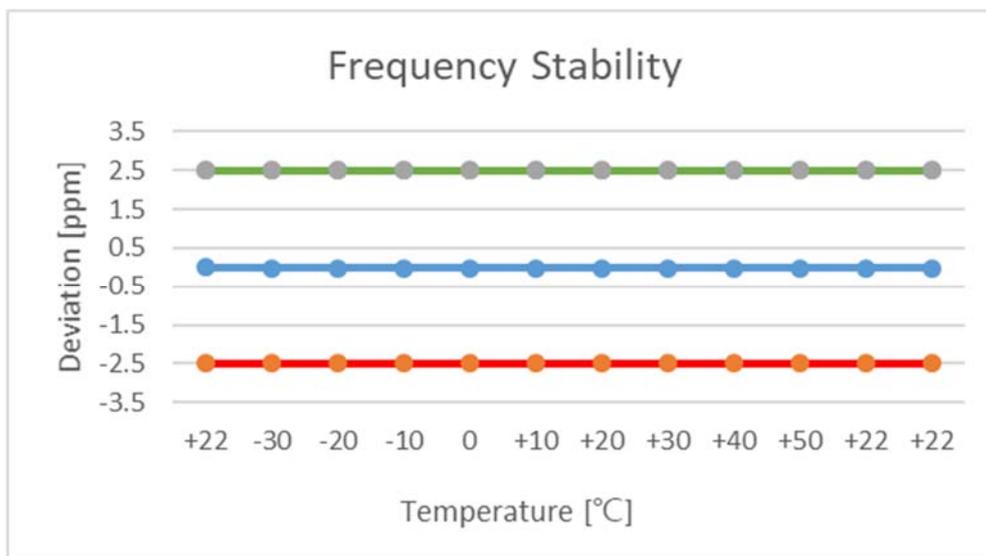

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (200) of (220)



Test mode : LTE Band 41
 Frequency (Hz) : 2 593 000 000
 Channel : 40620
 Deviation limit(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized bands of operation.

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.86	+22(Ref)	2,592,999,990	-9.77	0.0	0.000000
		-30	2,592,999,989	-11.48	0.0	0.000000
		-20	2,592,999,991	-9.42	0.0	0.000000
		-10	2,592,999,991	-8.82	0.0	0.000000
		0	2,592,999,991	-9.25	0.0	0.000000
		+10	2,592,999,988	-11.71	0.0	0.000000
		+20	2,592,999,991	-8.79	0.0	0.000000
		+30	2,592,999,991	-8.61	0.0	0.000000
		+40	2,592,999,991	-9.47	0.0	0.000000
115%	4.44	+22	2,592,999,988	-11.89	0.0	0.000000
End point	3.45	+22	2,592,999,991	-8.55	0.0	0.000000

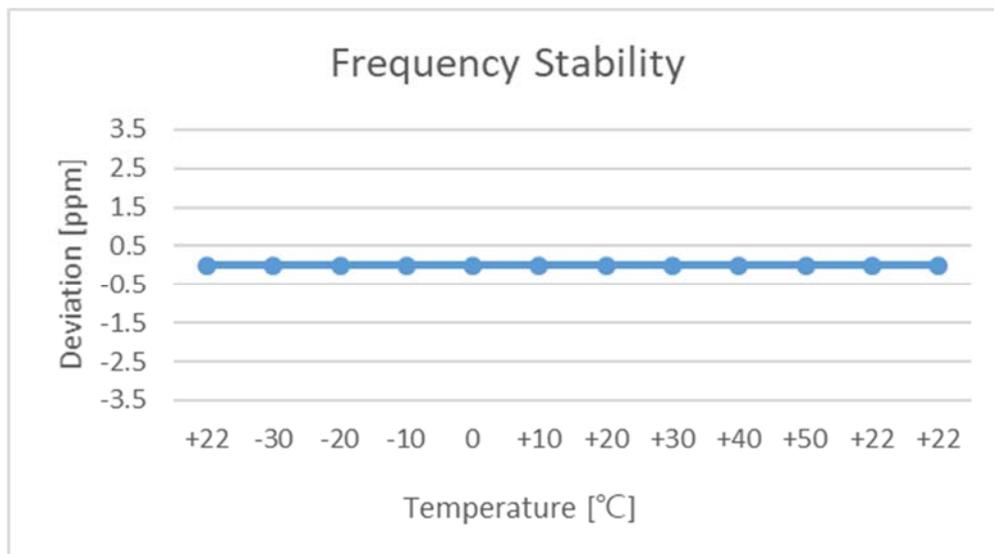

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (201) of (220)



Test mode : LTE Band 66/4
 Frequency (Hz) : 1 745 000 000
 Channel : 132322
 Deviation limit(FCC&IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized bands of operation.


Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.86	+22(Ref)	1,744,999,993	-6.58	0.0	0.000000
		-30	1,744,999,993	-7.27	0.0	0.000000
		-20	1,744,999,993	-6.77	0.0	0.000000
		-10	1,744,999,993	-6.80	0.0	0.000000
		0	1,744,999,993	-7.37	0.0	0.000000
		+10	1,744,999,993	-7.11	0.0	0.000000
		+20	1,744,999,993	-7.03	0.0	0.000000
		+30	1,744,999,993	-6.91	0.0	0.000000
		+40	1,744,999,993	-7.50	0.0	0.000000
		+50	1,744,999,993	-6.84	0.0	0.000000
115%	4.44	+22(Ref)	1,744,999,992	-7.58	0.0	0.000000
End point	3.45	+22(Ref)	1,744,999,993	-7.28	0.0	0.000000

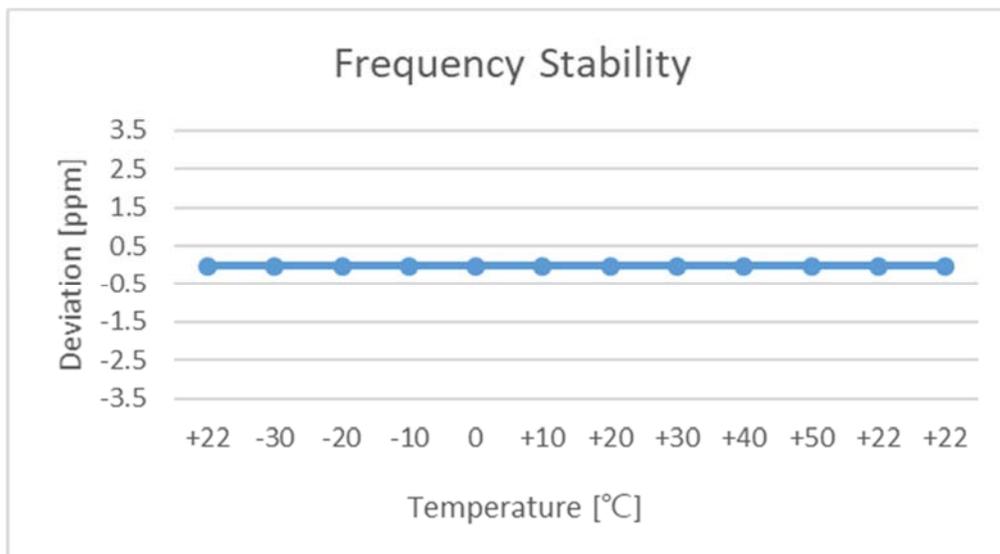


7.7. Radiated Power (ERP/EIRP)

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

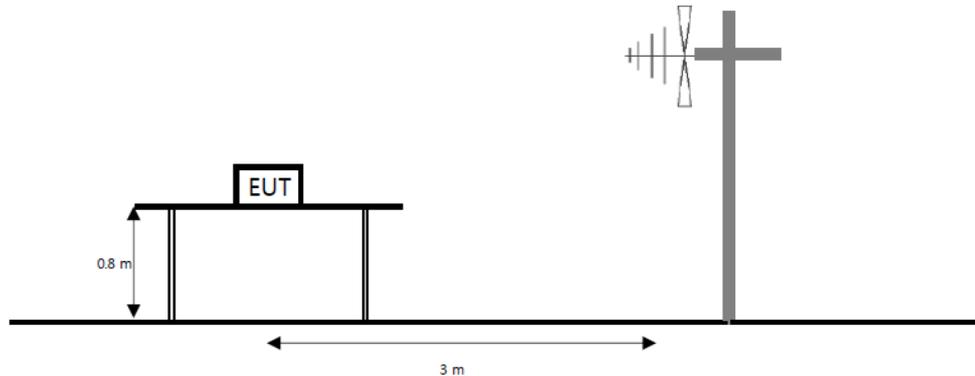

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

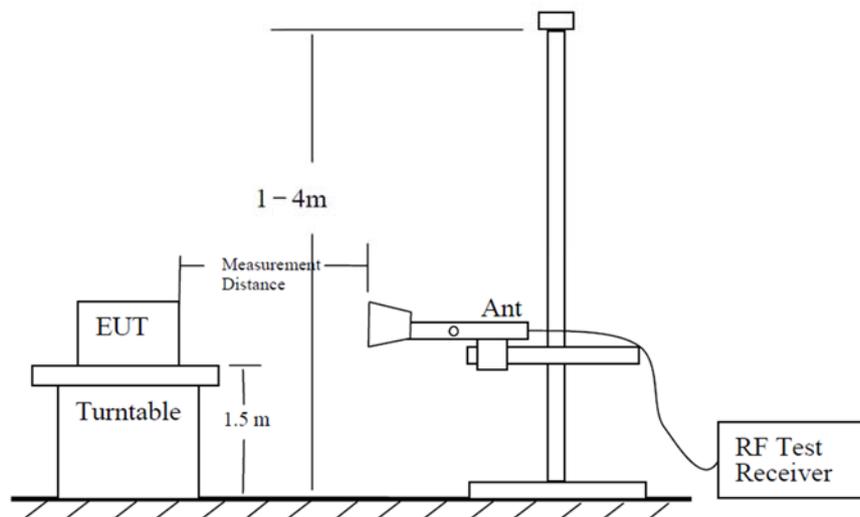

The diagram below shows the test setup for substituted method.

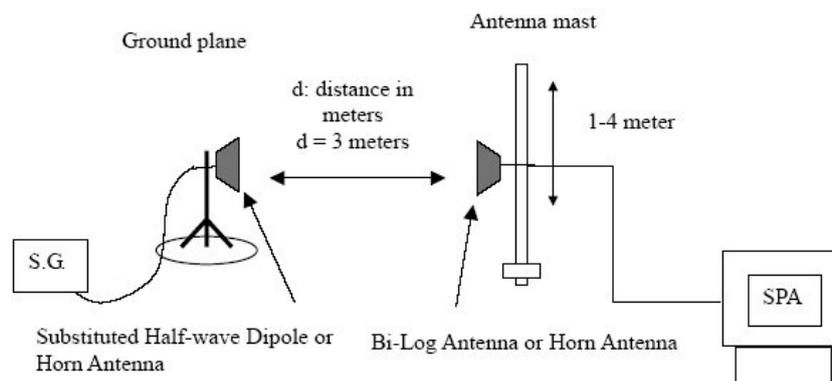

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (203) of (220)



Limit

According to §22.913(a)(5), the ERP of transmitters in the cellular radiotelephone service must not exceed the limits in this section. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to §24.232(c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(c)(10), Portable stations (hand-held devices) in the 698 -746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited 3 watts ERP.

According to §27.50(d)(4), Fixed, mobile and portable (hand-held) stations operating in the 1710-1755 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

According to §27.50(h)(2), Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test procedure

971168 D01 v03r01 - Section 5.2 and 5.8, 412172 D01 v01r01
ANSI 63.26-2015 – Section 5.2
ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 \times to 3 \times the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (204) of (220)

**Notes:**

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
The power is calculated by the following formula;
$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$

Note. P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (205) of (220)

**Test results****Test mode: LTE Band 2**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
1.4 M	QPSK	1 850.7	H	5.46	5.62	18.34	18.18	0.066
		1 880.0	H	5.39	5.69	17.41	17.11	0.051
		1 909.3	H	5.32	5.69	18.16	17.79	0.060
	16QAM	1 850.7	H	5.46	5.62	17.66	17.50	0.056
		1 880.0	H	5.39	5.69	16.57	16.27	0.042
		1 909.3	H	5.32	5.69	16.91	16.54	0.045
3 M	QPSK	1 851.5	H	5.46	5.64	18.34	18.16	0.065
		1 880.0	H	5.39	5.69	17.30	17.00	0.050
		1 908.5	H	5.32	5.69	18.31	17.94	0.062
	16QAM	1 851.5	H	5.46	5.64	17.22	17.04	0.051
		1 880.0	H	5.39	5.69	16.48	16.18	0.041
		1 908.5	H	5.32	5.69	17.07	16.70	0.047
5 M	QPSK	1 852.5	H	5.45	5.64	18.04	17.85	0.061
		1 880.0	H	5.39	5.69	17.28	16.98	0.050
		1 907.5	H	5.32	5.71	18.31	17.92	0.062
	16QAM	1 852.5	H	5.45	5.64	17.23	17.04	0.051
		1 880.0	H	5.39	5.69	16.20	15.90	0.039
		1 907.5	H	5.32	5.71	17.53	17.14	0.052
10 M	QPSK	1 855.0	H	5.45	5.64	18.35	18.16	0.065
		1 880.0	H	5.39	5.69	17.28	16.98	0.050
		1 905.0	H	5.33	5.72	18.07	17.68	0.059
	16QAM	1 855.0	H	5.45	5.64	17.79	17.60	0.058
		1 880.0	H	5.39	5.69	16.58	16.28	0.042
		1 905.0	H	5.33	5.72	16.74	16.35	0.043
15 M	QPSK	1 857.5	H	5.44	5.63	18.38	18.19	0.066
		1 880.0	H	5.39	5.69	17.34	17.04	0.051
		1 902.5	H	5.33	5.70	18.13	17.76	0.060
	16QAM	1 857.5	H	5.44	5.63	17.43	17.24	0.053
		1 880.0	H	5.39	5.69	16.45	16.15	0.041
		1 902.5	H	5.33	5.70	17.63	17.26	0.053
20 M	QPSK	1 860.0	H	5.44	5.65	18.58	18.37	0.069
		1 880.0	H	5.39	5.69	17.30	17.00	0.050
		1 900.0	H	5.34	5.72	17.93	17.55	0.057
	16QAM	1 860.0	H	5.44	5.65	17.63	17.42	0.055
		1 880.0	H	5.39	5.69	16.52	16.22	0.042
		1 900.0	H	5.34	5.72	16.92	16.54	0.045

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (206) of (220)

**Test mode: LTE Band 5**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
1.4 M	QPSK	824.7	V	-1.98	3.83	24.12	18.31	0.068
		836.5	V	-2.43	3.87	23.90	17.60	0.058
		848.3	V	-2.78	3.89	23.43	16.76	0.047
	16QAM	824.7	V	-1.98	3.83	23.26	17.45	0.056
		836.5	V	-2.43	3.87	22.94	16.64	0.046
		848.3	V	-2.78	3.89	22.54	15.87	0.039
3 M	QPSK	825.5	V	-1.90	3.83	24.19	18.46	0.070
		836.5	V	-2.43	3.87	23.74	17.44	0.055
		847.5	V	-2.80	3.89	23.33	16.64	0.046
	16QAM	825.5	V	-1.90	3.83	23.25	17.52	0.056
		836.5	V	-2.43	3.87	23.04	16.74	0.047
		847.5	V	-2.80	3.89	22.08	15.39	0.035
5 M	QPSK	826.5	V	-1.80	3.83	24.36	18.73	0.075
		836.5	V	-2.43	3.87	23.73	17.43	0.055
		846.5	V	-2.82	3.89	23.25	16.54	0.045
	16QAM	826.5	V	-1.80	3.83	23.40	17.77	0.060
		836.5	V	-2.43	3.87	22.67	16.37	0.043
		846.5	V	-2.82	3.89	22.63	15.92	0.039
10 M	QPSK	829.0	V	-1.55	3.83	24.53	19.15	0.082
		836.5	V	-2.43	3.87	23.73	17.43	0.055
		844.0	V	-2.87	3.88	24.23	17.48	0.056
	16QAM	829.0	V	-1.55	3.83	23.30	17.92	0.062
		836.5	V	-2.43	3.87	23.08	16.78	0.048
		844.0	V	-2.87	3.88	23.21	16.46	0.044

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (207) of (220)

**Test mode: LTE Band 12/17**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
1.4 M	QPSK	699.7	V	-2.85	3.52	22.79	16.42	0.044
		707.5	V	-2.55	3.57	22.29	16.17	0.041
		715.3	V	-2.66	3.57	21.57	15.34	0.034
	16QAM	699.7	V	-2.85	3.52	21.81	15.44	0.035
		707.5	V	-2.55	3.57	21.19	15.07	0.032
		715.3	V	-2.66	3.57	20.58	14.35	0.027
3 M	QPSK	700.5	V	-2.83	3.53	22.82	16.46	0.044
		707.5	V	-2.55	3.57	22.34	16.22	0.042
		714.5	V	-2.63	3.56	21.61	15.42	0.035
	16QAM	700.5	V	-2.83	3.53	21.95	15.59	0.036
		707.5	V	-2.55	3.57	21.62	15.50	0.035
		714.5	V	-2.63	3.56	20.57	14.38	0.027
5 M	QPSK	701.5	V	-2.79	3.53	22.96	16.64	0.046
		707.5	V	-2.55	3.57	22.21	16.09	0.041
		713.5	V	-2.59	3.56	21.87	15.72	0.037
	16QAM	701.5	V	-2.79	3.53	21.88	15.56	0.036
		707.5	V	-2.55	3.57	21.49	15.37	0.034
		713.5	V	-2.59	3.56	21.09	14.94	0.031
10 M	QPSK	704.0	V	-2.69	3.54	22.73	16.50	0.045
		707.5	V	-2.55	3.57	22.39	16.27	0.042
		711.0	V	-2.49	3.56	22.10	16.05	0.040
	16QAM	704.0	V	-2.69	3.54	21.83	15.60	0.036
		707.5	V	-2.55	3.57	21.72	15.60	0.036
		711.0	V	-2.49	3.56	21.36	15.31	0.034

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (208) of (220)

**Test mode: LTE Band 26**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBd]	[dB]	[dBm]	[dBm]	[W]
1.4 M	QPSK	824.7	V	-1.98	3.83	24.15	18.34	0.068
		836.5	V	-2.43	3.87	23.80	17.50	0.056
		848.3	V	-2.78	3.89	23.34	16.67	0.046
	16QAM	824.7	V	-1.98	3.83	23.12	17.31	0.054
		836.5	V	-2.43	3.87	22.88	16.58	0.045
		848.3	V	-2.78	3.89	22.30	15.63	0.037
3 M	QPSK	825.5	V	-1.90	3.83	24.22	18.49	0.071
		836.5	V	-2.43	3.87	23.69	17.39	0.055
		847.5	V	-2.80	3.89	23.14	16.45	0.044
	16QAM	825.5	V	-1.90	3.83	23.21	17.48	0.056
		836.5	V	-2.43	3.87	22.90	16.60	0.046
		847.5	V	-2.80	3.89	22.10	15.41	0.035
5 M	QPSK	826.5	V	-1.80	3.83	23.79	18.16	0.065
		836.5	V	-2.43	3.87	23.74	17.44	0.055
		846.5	V	-2.82	3.89	23.29	16.58	0.045
	16QAM	826.5	V	-1.80	3.83	22.75	17.12	0.052
		836.5	V	-2.43	3.87	22.85	16.55	0.045
		846.5	V	-2.82	3.89	22.46	15.75	0.038
10 M	QPSK	829.0	V	-1.55	3.83	24.14	18.76	0.075
		836.5	V	-2.43	3.87	23.87	17.57	0.057
		844.0	V	-2.87	3.88	24.38	17.63	0.058
	16QAM	829.0	V	-1.55	3.83	23.17	17.79	0.060
		836.5	V	-2.43	3.87	22.97	16.67	0.046
		844.0	V	-2.87	3.88	23.34	16.59	0.046
15 M	QPSK	831.5	V	-1.68	3.84	24.34	18.82	0.076
		836.5	V	-2.43	3.87	23.75	17.45	0.056
		841.5	V	-2.92	3.87	24.16	17.37	0.055
	16QAM	831.5	V	-1.68	3.84	24.11	18.59	0.072
		836.5	V	-2.43	3.87	23.12	16.82	0.048
		841.5	V	-2.92	3.87	23.61	16.82	0.048

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (209) of (220)

**Test mode: LTE Band 41**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	ERP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
5 M	QPSK	2 498.5	V	6.20	6.54	19.04	18.70	0.074
		2 593.0	V	6.33	6.68	20.71	20.36	0.109
		2 687.5	V	6.46	6.85	17.24	16.85	0.048
	16QAM	2 498.5	V	6.20	6.54	17.44	17.10	0.051
		2 693.0	V	6.33	6.68	18.81	18.46	0.070
		2 687.5	V	6.46	6.85	14.95	14.56	0.029
10 M	QPSK	2 501.0	V	6.20	6.55	19.86	19.51	0.089
		2 593.0	V	6.33	6.68	20.09	19.74	0.094
		2 685.0	V	6.46	6.83	17.19	16.82	0.048
	16QAM	2 501.0	V	6.20	6.55	19.24	18.89	0.077
		2 593.0	V	6.33	6.68	18.44	18.09	0.064
		2 685.0	V	6.46	6.83	15.87	15.50	0.035
15 M	QPSK	2 503.5	V	6.20	6.54	20.13	19.79	0.095
		2 593.0	V	6.33	6.68	19.59	19.24	0.084
		2 682.5	V	6.46	6.83	16.45	16.08	0.041
	16QAM	2 503.5	V	6.20	6.54	18.70	18.36	0.069
		2 593.0	V	6.33	6.68	18.18	17.83	0.061
		2 682.5	V	6.46	6.83	15.08	14.71	0.030
20 M	QPSK	2 506.0	V	6.21	6.56	19.49	19.14	0.082
		2 593.0	V	6.33	6.68	20.38	20.03	0.101
		2 680.0	V	6.45	6.83	17.81	17.43	0.055
	16QAM	2 506.0	V	6.21	6.56	18.20	17.85	0.061
		2 593.0	V	6.33	6.68	18.69	18.34	0.068
		2 680.0	V	6.45	6.83	15.34	14.96	0.031

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (210) of (220)

**Test mode: LTE Band 66/4**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
1.4 M	QPSK	1 710.7	H	5.79	5.40	20.54	20.93	0.124
		1 745.0	H	5.71	5.46	20.70	20.95	0.124
		1 779.3	H	5.63	5.54	21.95	22.04	0.160
	16QAM	1 710.7	H	5.79	5.40	19.46	19.85	0.097
		1 745.0	H	5.71	5.46	19.76	20.01	0.100
		1 779.3	H	5.63	5.54	21.05	21.14	0.130
3 M	QPSK	1 711.5	H	5.79	5.40	20.32	20.71	0.118
		1 745.0	H	5.71	5.46	20.82	21.07	0.128
		1 778.5	H	5.63	5.54	22.05	22.14	0.164
	16QAM	1 711.5	H	5.79	5.40	19.02	19.41	0.087
		1 745.0	H	5.71	5.46	19.89	20.14	0.103
		1 778.5	H	5.63	5.54	20.90	20.99	0.126
5 M	QPSK	1 712.5	H	5.79	5.41	20.15	20.53	0.113
		1 745.0	H	5.71	5.46	20.75	21.00	0.126
		1 777.5	H	5.63	5.52	21.76	21.87	0.154
	16QAM	1 712.5	H	5.79	5.41	19.23	19.61	0.091
		1 745.0	H	5.71	5.46	19.77	20.02	0.100
		1 777.5	H	5.63	5.52	21.13	21.24	0.133
10 M	QPSK	1 715.0	H	5.78	5.41	20.13	20.50	0.112
		1 745.0	H	5.71	5.46	21.07	21.32	0.136
		1 775.0	H	5.64	5.51	22.08	22.21	0.166
	16QAM	1 715.0	H	5.78	5.41	19.12	19.49	0.089
		1 745.0	H	5.71	5.46	19.89	20.14	0.103
		1 775.0	H	5.64	5.51	21.28	21.41	0.138
15 M	QPSK	1 717.5	H	5.78	5.42	20.45	20.81	0.121
		1 745.0	H	5.71	5.46	20.80	21.05	0.127
		1 772.5	H	5.65	5.53	21.55	21.67	0.147
	16QAM	1 717.5	H	5.78	5.42	19.15	19.51	0.089
		1 745.0	H	5.71	5.46	19.91	20.16	0.104
		1 772.5	H	5.65	5.53	20.55	20.67	0.117
20 M	QPSK	1 720.0	H	5.77	5.42	20.07	20.42	0.110
		1 745.0	H	5.71	5.46	20.87	21.12	0.129
		1 770.0	H	5.65	5.52	22.09	22.22	0.167
	16QAM	1 720.0	H	5.77	5.42	18.84	19.19	0.083
		1 745.0	H	5.71	5.46	20.04	20.29	0.107
		1 770.0	H	5.65	5.52	20.83	20.96	0.125


Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)


7.8. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

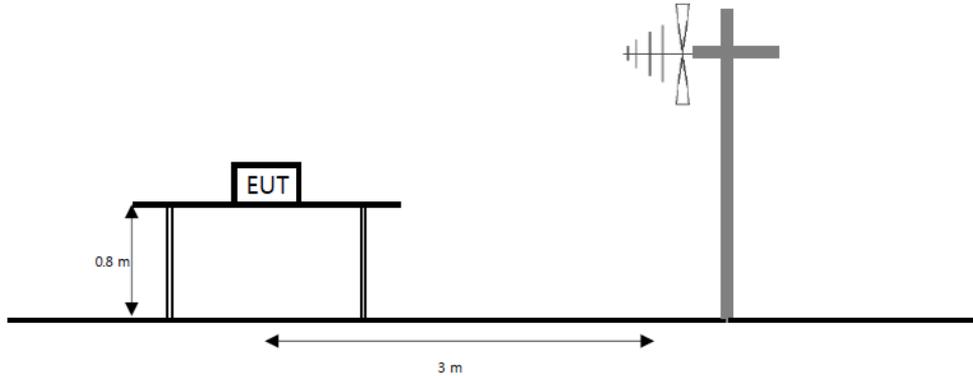

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

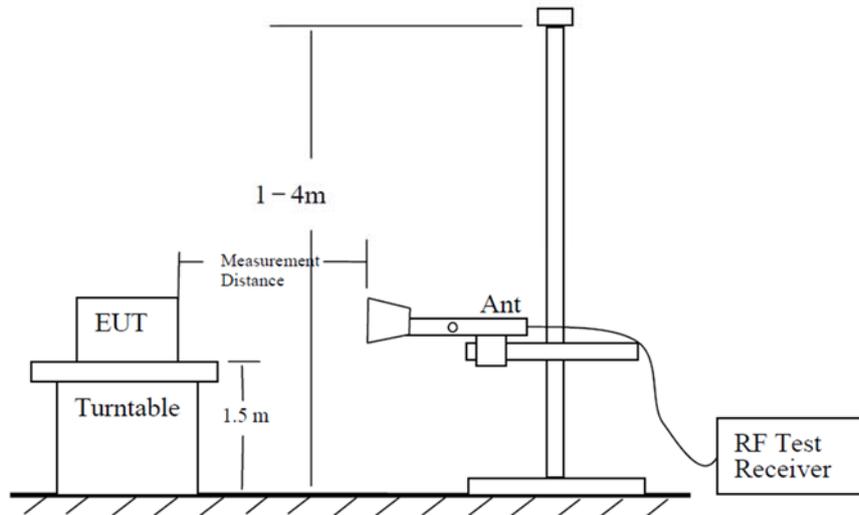

The diagram below shows the test setup for substituted method.

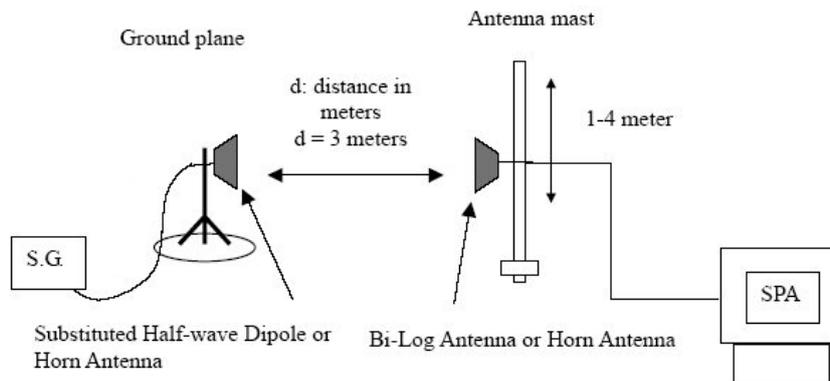

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (212) of (220)



Limit

According to §22.917(a), §24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P_{\text{Watts}})$ dB.

According to §27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10\log(P_{\text{Watts}})$ dB.

According to §27.53(h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log(P_{\text{Watts}})$ dB.

According to §27.53(m)(4), the minimum permissible attenuation level of any spurious emission is $53 + 10\log(P_{\text{Watts}})$ dB.

Test procedure

971168 D01 v03r01 - Section 6.2
ANSI 63.26-2015 – Section 5.5
ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

- 1) RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times$ span / RBW
- 7) Allow trace to fully stabilize.

For the narrowband spurious settings:

- 1) RBW = 1 kHz
- 2) VBW = 3 kHz
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep speed slow enough to maintain measurement calibration.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (213) of (220)

**Notes:**

1. On a test site, the EUT shall be placed at 80 cm or 1.5 m height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring corrected for the change of input attenuator setting of the measuring receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (214) of (220)

KCTL**Test results (Above 1 000 MHz)**Test mode : LTE Band 2Frequency(MHz) : 1 860.0Channel : 18700Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 702.00	H	8.54	8.23	-53.31	-53.00	-13.00	40.00
	5 553.00	V	10.51	10.25	-45.86	-45.60	-13.00	32.60
	7 404.00	H	11.97	11.99	-40.48	-40.50	-13.00	27.50
	9 255.00	V	13.20	13.27	-47.53	-47.60	-13.00	34.60

Test mode : LTE Band 2Frequency(MHz) : 1 880.0Channel : 18900Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 741.75	V	8.59	8.27	-52.62	-52.30	-13.00	39.30
	5 613.00	V	10.52	10.33	-53.49	-53.30	-13.00	40.30
	7 484.25	V	12.08	12.04	-45.44	-45.40	-13.00	32.40
	9 351.00	H	13.20	13.34	-52.76	-52.90	-13.00	39.90

Test mode : LTE Band 2Frequency(MHz) : 1 900.0Channel : 19100Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 817.50	V	8.68	8.34	-49.34	-49.00	-13.00	36.00
	5 726.25	V	10.55	10.43	-50.22	-50.10	-13.00	37.10
	7 635.00	V	12.21	11.94	-43.67	-43.40	-13.00	30.40
	9 544.50	H	13.19	13.29	-46.70	-46.80	-13.00	33.80

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (215) of (220)



Test mode : LTE Band 5

Frequency(MHz) : 829.0

Channel : 20450

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 649.11	V	5.94	5.31	-53.53	-52.90	-13.00	39.90
	3 298.26	V	7.74	7.68	-51.06	-51.00	-13.00	38.00
	4 122.64	H	8.83	8.68	-34.35	-34.20	-13.00	21.20
	4 947.42	H	9.94	9.68	-44.36	-44.10	-13.00	31.10
	6 596.58	V	10.92	11.18	-42.84	-43.10	-13.00	30.10

Test mode : LTE Band 5

Frequency(MHz) : 836.5

Channel : 20525

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 663.95	V	5.91	5.32	-54.19	-53.60	-13.00	40.60
	4 160.58	V	8.80	8.68	-36.32	-36.20	-13.00	23.20
	4 992.78	H	10.08	9.75	-45.93	-45.60	-13.00	32.60
	6 656.79	H	10.99	11.28	-43.11	-43.40	-13.00	30.40

Test mode : LTE Band 5

Frequency(MHz) : 844.0

Channel : 20600

Bandwidth(MHz) : 10

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 678.80	V	5.87	5.35	-57.92	-57.40	-13.00	44.40
	4 198.10	H	8.78	8.73	-36.65	-36.60	-13.00	23.60
	5 037.32	H	10.13	9.81	-49.82	-49.50	-13.00	36.50
	6 716.58	H	11.06	11.40	-44.46	-44.80	-13.00	31.80

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (216) of (220)



Test mode : LTE Band 12/17

Frequency(MHz) : 701.5

Channel : 23035

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 496.62	V	8.29	7.95	-48.94	-48.60	-13.00	35.60
	4 196.04	H	8.78	8.73	-40.15	-40.10	-13.00	27.10
	4 895.46	H	9.79	9.58	-51.61	-51.40	-13.00	38.40
	6 294.29	H	10.72	10.91	-45.61	-45.80	-13.00	32.80
	6 992.89	H	11.39	11.54	-48.15	-48.30	-13.00	35.30

Test mode : LTE Band 12/17

Frequency(MHz) : 707.5

Channel : 23095

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 527.14	H	8.33	7.99	-50.54	-50.20	-13.00	37.20
	4 231.92	H	8.76	8.76	-40.60	-40.60	-13.00	27.60
	4 937.11	H	9.91	9.67	-52.74	-52.50	-13.00	39.50
	6 347.90	V	10.74	11.08	-48.26	-48.60	-13.00	35.60
	7 053.51	H	11.47	11.53	-49.44	-49.50	-13.00	36.50

Test mode : LTE Band 12/17

Frequency(MHz) : 713.5

Channel : 23155

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	4 282.23	H	8.73	8.86	-43.17	-43.30	-13.00	30.30
	4 995.67	H	10.09	9.75	-51.44	-51.10	-13.00	38.10
	6 423.37	H	10.77	10.95	-43.22	-43.40	-13.00	30.40
	7 136.81	H	11.59	11.61	-47.48	-47.50	-13.00	34.50

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (217) of (220)



Test mode : LTE Band 26

Frequency(MHz) : 831.5

Channel : 26865

Bandwidth(MHz) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 663.13	H	5.91	5.32	-54.39	-53.80	-13.00	40.80
	3 326.72	H	7.81	7.72	-48.79	-48.70	-13.00	35.70
	4 158.51	V	8.80	8.68	-36.42	-36.30	-13.00	23.30
	4 989.90	H	10.07	9.74	-45.83	-45.50	-13.00	32.50
	6 653.49	H	10.98	11.28	-42.20	-42.50	-13.00	29.50

Test mode : LTE Band 26

Frequency(MHz) : 836.5

Channel : 26915

Bandwidth(MHz) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 659.42	H	5.92	5.31	-53.81	-53.20	-13.00	40.20
	3 319.30	V	7.79	7.71	-49.38	-49.30	-13.00	36.30
	4 149.03	H	8.81	8.71	-35.40	-35.30	-13.00	22.30
	4 979.17	H	10.04	9.73	-45.81	-45.50	-13.00	32.50
	6 638.64	H	10.97	11.27	-43.90	-44.20	-13.00	31.20

Test mode : LTE Band 26

Frequency(MHz) : 841.5

Channel : 26965

Bandwidth(MHz) : 15

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	1 669.73	V	5.89	5.33	-57.36	-56.80	-13.00	43.80
	4 174.18	H	8.80	8.70	-37.50	-37.40	-13.00	24.40
	5 843.55	H	10.57	10.59	-43.18	-43.20	-13.00	30.20
	6 678.64	H	11.01	11.29	-46.02	-46.30	-13.00	33.30

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (218) of (220)



Test mode : LTE Band 41

Frequency(MHz) : 2 498.5

Channel : 39675

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	7 488.75	H	12.08	12.04	-47.74	-47.70	-25.00	22.70
	4 992.75	V	10.08	9.75	-59.03	-58.70	-25.00	33.70
	9 984.75	H	13.10	13.94	-51.26	-52.10	-25.00	27.10
	12 480.75	V	13.20	15.39	-49.81	-52.00	-25.00	27.00

Test mode : LTE Band 41

Frequency(MHz) : 2 593.0

Channel : 40620

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	5 191.50	V	10.25	10.12	-58.73	-58.60	-25.00	33.60
	7 786.50	V	12.33	12.07	-58.06	-57.80	-25.00	32.80
	10 382.25	V	13.10	14.02	-51.48	-52.40	-25.00	27.40
	12 977.25	H	13.49	15.92	-51.17	-53.60	-25.00	28.60

Test mode : LTE Band 41

Frequency(MHz) : 2 687.5

Channel : 41565

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	5 379.00	H	10.40	10.07	-51.63	-51.30	-25.00	26.30
	8 070.75	V	12.57	12.34	-56.43	-56.20	-25.00	31.20
	10 761.00	V	13.15	14.41	-51.34	-52.60	-25.00	27.60
	13 447.50	H	14.04	16.03	-44.71	-46.70	-25.00	21.70

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBd&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (219) of (220)



Test mode : LTE Band 66/4

Frequency(MHz) : 1 720.0

Channel : 132072

Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 440.25	H	8.13	7.88	-47.55	-47.30	-13.00	34.30
	5 160.00	V	10.23	10.10	-46.13	-46.00	-13.00	33.00
	6 879.75	V	11.26	11.45	-38.81	-39.00	-13.00	26.00
	8 600.25	V	13.04	12.63	-30.41	-30.00	-13.00	17.00

Test mode : LTE Band 66/4

Frequency(MHz) : 1 745.0

Channel : 132322

Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 489.75	H	8.27	7.94	-45.63	-45.30	-13.00	32.30
	5 235.00	V	10.29	9.83	-44.36	-43.90	-13.00	30.90
	6 979.50	V	11.38	11.53	-39.95	-40.10	-13.00	27.10
	8 724.75	V	13.09	12.73	-35.46	-35.10	-13.00	22.10
	10 470.00	V	13.10	14.07	-43.23	-44.20	-13.00	31.20

Test mode : LTE Band 66/4

Frequency(MHz) : 1 770.0

Channel : 132572

Bandwidth(MHz) : 20

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	3 540.00	H	8.35	8.01	-48.94	-48.60	-13.00	35.60
	5 310.00	V	10.35	10.00	-42.05	-41.70	-13.00	28.70
	7 080.00	V	11.51	11.56	-37.95	-38.00	-13.00	25.00
	8 850.00	V	13.14	12.68	-36.66	-36.20	-13.00	23.20

Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dB&dBi) - C.L(Cable loss) (dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR21-SRF0140
Page (220) of (220)



8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Biconical VHF-UHF Broadband Antenna	SCHWARZBECK	VUBA9117	275	22.04.09
Bilog Antenna	Teseq GmbH	CBL 6143A	35039	23.05.13*
Horn Antenna	ETS.lindgren	3117	00227509	21.09.23
Horn Antenna	ETS.lindgren	3117	161225	22.05.11*
Horn Antenna	ETS.lindgren	3116	00086632	22.01.29
Horn Antenna	ETS.lindgren	3116	00086635	22.05.17*
High pass Filter	Wainwright Instruments GmbH	WHKX3.0/18G-12SS	44	22.01.20
High pass Filter	Wainwright Instruments GmbH	WHKX10-900-1000-15000-40SS	11	21.08.20
Attenuator	Weinschel ENGINEERING	10	AJ1239	22.05.11*
Broadband Amplifier	SONOMA INSTRUMENT	310N	185799	22.01.20
Amplifier	L-3 Narda-MITEQ	AFS5-00101800-25-S-5	2054570	22.05.10
Amplifier	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	22.01.21
Spectrum Analyzer	AGILENT	N9040B	MY57010132	21.07.29
Wideband Radio Communication Tester	R&S	CMW500	141780	22.04.01
Spectrum Analyzer	R&S	FSV40	100988	21.12.23
Power Divider	Aeroflex/ Weinschel, Inc	1580-1	PE430	21.07.29
Vector Signal Generator	R&S	SMBV100A	257566	21.07.13
Signal Generator	R&S	SMB100A	176206	22.01.20
Wideband Radio Communication Tester	R&S	CMW500	106840	22.01.20
Antenna Mast	MATURO	EAS 1.5	042/8941211	N/A
Antenna Mast	MATURO	EAS 1.5	043/8941211	N/A
Turn Table	MATURO	TT 0.8 PF	041/8941211	N/A

* Tests related to this equipment were progressed after the calibration was completed.

End of test report