



FCC ID: A3LSMM305F

Report No: HCT-SR-1901-FC004-R1

Attachment 6. – Probe Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client HCT (Dymstec)

Certificate No: EX3-3968 Sep18

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3968

| 기 | 담당자 | 회원자 |
|-------|------------|------------|
| 개 | Xin | YR |
| 직무/영역 | GT 1/AE/2 | GT 1/AE/2 |
| 일자 | 2018/10/05 | 2018/10/05 |

Calibration procedure(s)
 QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
 QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes

Calibration date: September 25, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 04-Apr-18 (No. 217-02672/02673) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-18 (No. 217-02672) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-18 (No. 217-02673) | Apr-19 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-18 (No. 217-02682) | Apr-19 |
| Reference Probe ES3DV2 | SN: 3013 | 30-Dec-17 (No. ES3-3013_Dec17) | Dec-18 |
| DAE4 | SN: 680 | 21-Dec-17 (No. DAE4-680_Dec17) | Dec-18 |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| RF generator HP 8648C | SN: US3642U01700 | 04-Aug-99 (in house check Jun-18) | In house check: Jun-20 |
| Network Analyzer E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-17) | In house check: Oct-18 |

| Calibrated by: | Name | Function | Signature |
|----------------|----------------|-----------------------|-----------|
| | Jeton Kastrati | Laboratory Technician | |
| Approved by: | Katja Pokovic | Technical Manager | |

Issued: September 27, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

| | |
|------------------------|--|
| TSL | tissue simulating liquid |
| NORM _{x,y,z} | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM _{x,y,z} |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization θ | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).



FCC ID: A3LSMM305F

Report No: HCT-SR-1901-FC004-R1

EX3DV4 – SN:3968

September 25, 2018

Probe EX3DV4

SN:3968

Manufactured: September 30, 2013
Repaired: September 13, 2018
Calibrated: September 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3968

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3968

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|--------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^{\frac{1}{2}}$) ^A | 0.56 | 0.57 | 0.56 | $\pm 10.1\%$ |
| DCP (mV) ^B | 98.0 | 99.0 | 97.6 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB/ $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|-------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 171.6 | $\pm 2.7\%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 161.6 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 178.8 | |

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

| | C1 FF | C2 FF | α V^{-1} | T1 ms.V^{-2} | T2 ms.V^{-1} | T3 ms | T4 V^{-1} | T5 V^{-1} | T6 |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|-------|
| X | 46.84 | 361.8 | 37.71 | 11.82 | 0.384 | 5.084 | 0.048 | 0.556 | 1.008 |
| Y | 48.24 | 363.7 | 36.17 | 17.75 | 0.176 | 5.100 | 1.558 | 0.280 | 1.009 |
| Z | 45.97 | 356.8 | 37.98 | 12.75 | 0.415 | 5.100 | 0.000 | 0.555 | 1.011 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3968

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3968

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^f | Conductivity (S/m) ^f | ConvF X | ConvF Y | ConvF Z | Alpha ^g | Depth ^g (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 600 | 42.7 | 0.88 | 10.56 | 10.56 | 10.56 | 0.09 | 1.20 | ± 13.3 % |
| 750 | 41.9 | 0.89 | 10.04 | 10.04 | 10.04 | 0.34 | 1.05 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.86 | 9.86 | 9.86 | 0.47 | 0.84 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.70 | 9.70 | 9.70 | 0.41 | 0.89 | ± 12.0 % |
| 1450 | 40.5 | 1.20 | 8.51 | 8.51 | 8.51 | 0.30 | 0.88 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.57 | 8.57 | 8.57 | 0.31 | 0.90 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.19 | 8.19 | 8.19 | 0.37 | 0.90 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.52 | 7.52 | 7.52 | 0.33 | 0.97 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.37 | 7.37 | 7.37 | 0.39 | 0.93 | ± 12.0 % |
| 3500 | 37.9 | 2.91 | 7.11 | 7.11 | 7.11 | 0.23 | 1.20 | ± 13.1 % |
| 5250 | 35.9 | 4.71 | 5.52 | 5.52 | 5.52 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.78 | 4.78 | 4.78 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 4.94 | 4.94 | 4.94 | 0.40 | 1.80 | ± 13.1 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4— SN:3968

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3968

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^D | Depth ^E (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 600 | 56.1 | 0.95 | 10.50 | 10.50 | 10.50 | 0.10 | 1.20 | ± 13.3 % |
| 750 | 55.5 | 0.96 | 10.07 | 10.07 | 10.07 | 0.49 | 0.80 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.86 | 9.86 | 9.86 | 0.49 | 0.82 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 8.19 | 8.19 | 8.19 | 0.36 | 0.92 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.76 | 7.76 | 7.76 | 0.39 | 0.92 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.54 | 7.54 | 7.54 | 0.35 | 0.95 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 7.50 | 7.50 | 7.50 | 0.33 | 1.05 | ± 12.0 % |
| 3500 | 51.3 | 3.31 | 7.00 | 7.00 | 7.00 | 0.25 | 1.20 | ± 13.1 % |
| 5250 | 48.9 | 5.36 | 4.98 | 4.98 | 4.98 | 0.50 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 4.28 | 4.28 | 4.28 | 0.50 | 1.90 | ± 13.1 % |
| 5750 | 48.3 | 5.94 | 4.49 | 4.49 | 4.49 | 0.50 | 1.90 | ± 13.1 % |

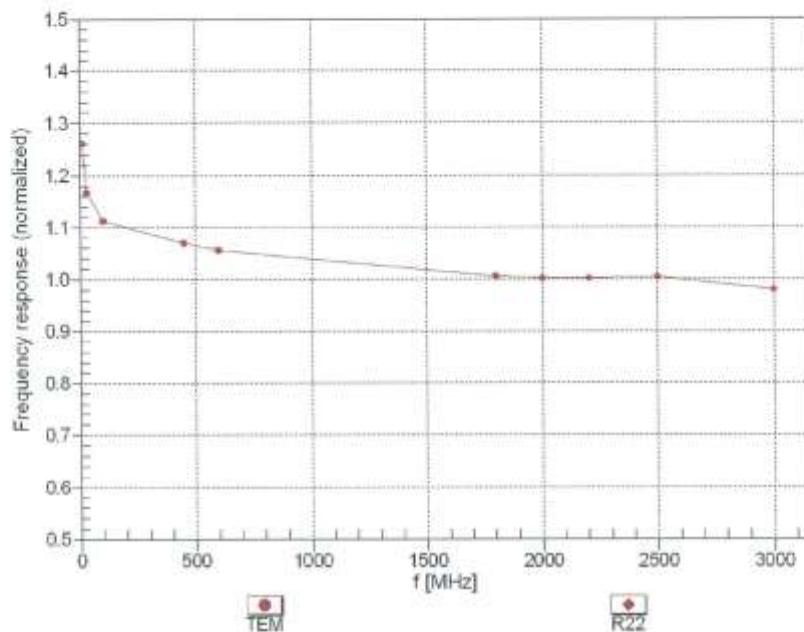
^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^D At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^E Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3968

September 25, 2018

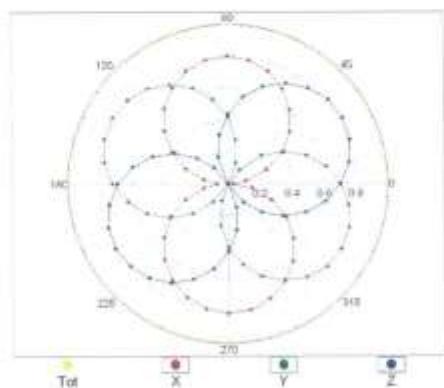
Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:3968

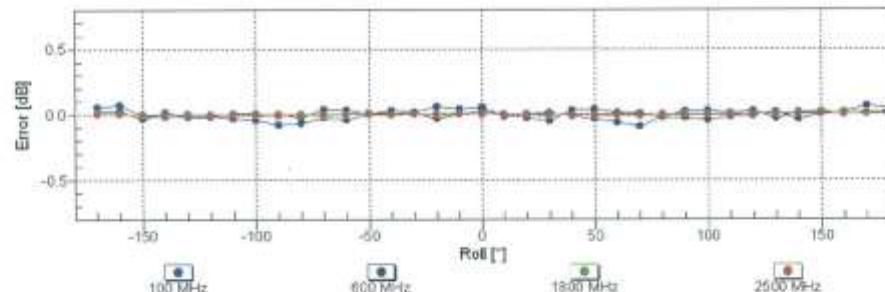
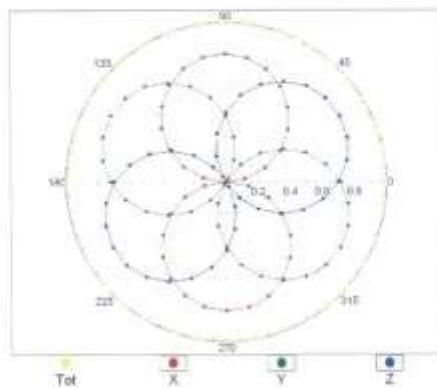
September 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz, TEM

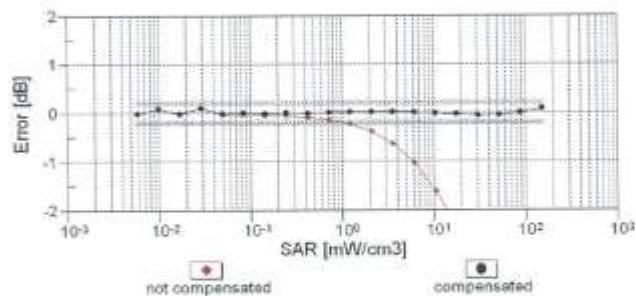
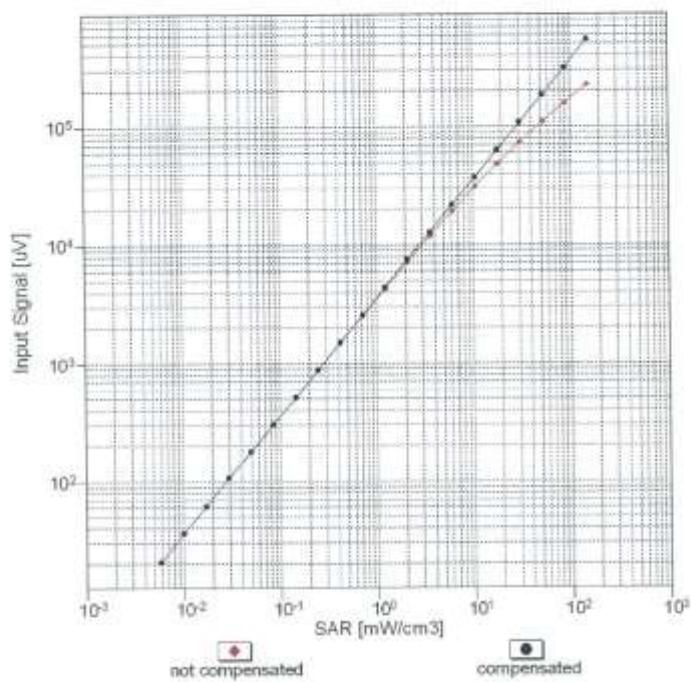


f=1800 MHz, R22

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3968

September 25, 2018

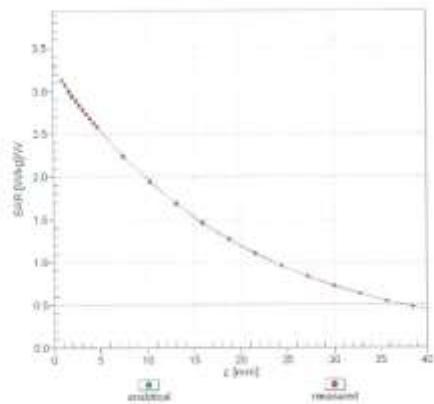
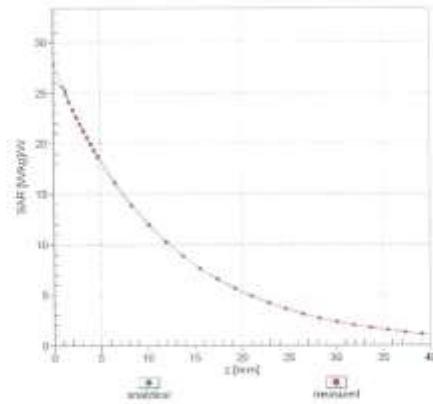
Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)

Uncertainty of Linearity Assessment: ± 0.6% (k=2)

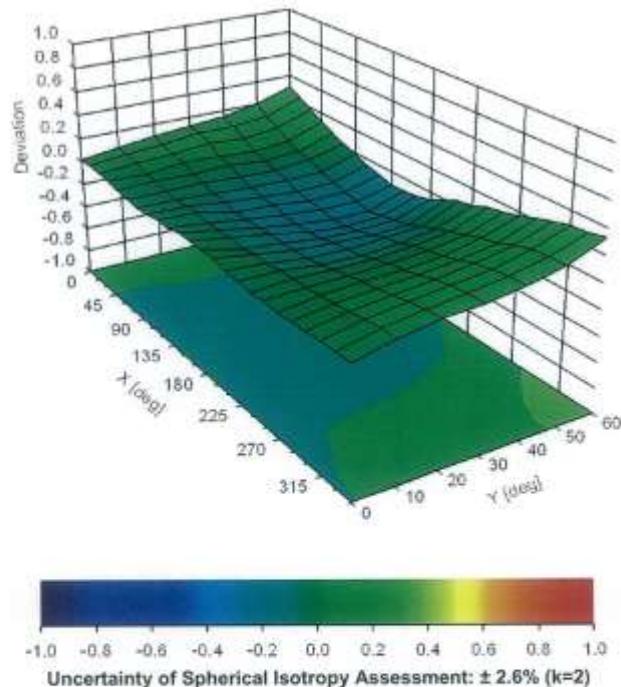
EX3DV4— SN:3968

September 25, 2018

Conversion Factor Assessment

 $f = 835 \text{ MHz}, \text{WGLS R9 (H_convF)}$  $f = 1900 \text{ MHz}, \text{WGLS R22 (H_convF)}$ 

Deviation from Isotropy in Liquid

Error (ϕ, θ), $f = 900 \text{ MHz}$ 

EX3DV4- SN:3968

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3968**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle (°) | 89.8 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

EX3DV4– SN:3968

September 25, 2018

Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB/\mu V | C | D dB | VR mV | Max Unc ^E (k=2) |
|-----------|---|---|---------|---------------|-------|---------|----------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 171.6 | ± 2.7 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 161.8 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 178.8 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 2.04 | 65.17 | 9.68 | 10.00 | 20.0 | ± 9.6 % |
| | | Y | 8.18 | 79.85 | 15.61 | | 20.0 | |
| | | Z | 2.07 | 65.29 | 9.80 | | 20.0 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 0.90 | 65.65 | 13.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.01 | 66.71 | 14.83 | | 150.0 | |
| | | Z | 0.85 | 64.91 | 13.28 | | 150.0 | |
| 10012-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.09 | 63.09 | 14.68 | 0.41 | 150.0 | ± 9.6 % |
| | | Y | 1.18 | 63.85 | 15.22 | | 150.0 | |
| | | Z | 1.07 | 62.88 | 14.43 | | 150.0 | |
| 10013-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.82 | 66.49 | 17.05 | 1.46 | 150.0 | ± 9.6 % |
| | | Y | 4.90 | 66.72 | 17.19 | | 150.0 | |
| | | Z | 4.80 | 66.47 | 17.03 | | 150.0 | |
| 10021-DAC | GSM-FDD (TDMA, GMSK) | X | 100.00 | 112.95 | 26.54 | 9.39 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 116.78 | 28.34 | | 50.0 | |
| | | Z | 100.00 | 113.62 | 26.91 | | 50.0 | |
| 10023-DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 100.00 | 112.47 | 26.37 | 9.57 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 116.29 | 28.16 | | 50.0 | |
| | | Z | 100.00 | 113.15 | 26.74 | | 50.0 | |
| 10024-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 100.00 | 112.42 | 25.25 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 116.67 | 27.49 | | 60.0 | |
| | | Z | 100.00 | 112.63 | 25.42 | | 60.0 | |
| 10025-DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 4.17 | 71.31 | 27.26 | 12.57 | 50.0 | ± 9.6 % |
| | | Y | 18.57 | 125.03 | 51.51 | | 50.0 | |
| | | Z | 4.56 | 74.25 | 28.97 | | 50.0 | |
| 10026-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 8.55 | 91.99 | 33.25 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 17.88 | 112.30 | 40.96 | | 60.0 | |
| | | Z | 9.37 | 94.40 | 34.22 | | 60.0 | |
| 10027-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 100.00 | 112.80 | 24.64 | 4.80 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 118.20 | 27.50 | | 80.0 | |
| | | Z | 100.00 | 112.38 | 24.54 | | 80.0 | |
| 10028-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 113.26 | 24.14 | 3.55 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 120.76 | 27.96 | | 100.0 | |
| | | Z | 100.00 | 111.87 | 23.62 | | 100.0 | |
| 10029-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 5.36 | 80.78 | 27.54 | 7.80 | 80.0 | ± 9.6 % |
| | | Y | 8.03 | 90.56 | 31.77 | | 80.0 | |
| | | Z | 5.68 | 82.14 | 28.14 | | 80.0 | |
| 10030-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 100.00 | 110.54 | 23.97 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 100.00 | 115.44 | 26.56 | | 70.0 | |
| | | Z | 100.00 | 110.48 | 24.01 | | 70.0 | |
| 10031-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 100.00 | 102.53 | 18.42 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 120.75 | 26.58 | | 100.0 | |
| | | Z | 100.00 | 98.98 | 17.01 | | 100.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|-------|-------|-------------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 100.00 | 94.07 | 14.33 | 1.17 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 127.26 | 28.22 | | 100.0 | |
| | | Z | 0.19 | 60.00 | 4.45 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (Pi/4-DQPSK, DH1) | X | 33.86 | 113.15 | 30.86 | 5.30 | 70.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.70 | 35.94 | | 70.0 | |
| | | Z | 47.35 | 117.79 | 31.89 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (Pi/4-DQPSK, DH3) | X | 3.06 | 78.07 | 18.40 | 1.88 | 100.0 | $\pm 9.6\%$ |
| | | Y | 5.91 | 87.15 | 22.07 | | 100.0 | |
| | | Z | 3.00 | 77.34 | 17.88 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (Pi/4-DQPSK, DH5) | X | 1.81 | 71.83 | 15.59 | 1.17 | 100.0 | $\pm 9.6\%$ |
| | | Y | 2.81 | 77.49 | 18.37 | | 100.0 | |
| | | Z | 1.71 | 70.83 | 14.89 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 85.81 | 128.27 | 34.60 | 5.30 | 70.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 132.16 | 36.15 | | 70.0 | |
| | | Z | 100.00 | 129.96 | 34.84 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 2.81 | 77.00 | 17.98 | 1.88 | 100.0 | $\pm 9.6\%$ |
| | | Y | 5.36 | 85.87 | 21.63 | | 100.0 | |
| | | Z | 2.75 | 76.32 | 17.47 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 1.83 | 72.24 | 15.88 | 1.17 | 100.0 | $\pm 9.6\%$ |
| | | Y | 2.84 | 77.93 | 18.66 | | 100.0 | |
| | | Z | 1.73 | 71.23 | 15.18 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 1.37 | 68.10 | 13.32 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.65 | 70.32 | 14.90 | | 150.0 | |
| | | Z | 1.20 | 66.45 | 12.23 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, Pi/4-DQPSK, Halfrate) | X | 100.00 | 108.41 | 23.72 | 7.78 | 50.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 112.84 | 25.84 | | 50.0 | |
| | | Z | 100.00 | 108.62 | 23.87 | | 50.0 | |
| 10044-CAA | IS-95/EIA/TIA-553 FDD (FDMA, FM) | X | 0.05 | 120.80 | 5.80 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.00 | 95.70 | 1.57 | | 150.0 | |
| | | Z | 0.08 | 122.23 | 6.34 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 100.00 | 109.98 | 26.73 | 13.80 | 25.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 116.82 | 29.41 | | 25.0 | |
| | | Z | 100.00 | 111.08 | 27.25 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 100.00 | 111.11 | 26.09 | 10.79 | 40.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 114.75 | 27.66 | | 40.0 | |
| | | Z | 100.00 | 111.84 | 26.47 | | 40.0 | |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 100.00 | 124.74 | 33.65 | 9.03 | 50.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 127.81 | 35.22 | | 50.0 | |
| | | Z | 100.00 | 124.78 | 33.70 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 4.18 | 75.71 | 24.53 | 6.55 | 100.0 | $\pm 9.6\%$ |
| | | Y | 5.57 | 81.92 | 27.38 | | 100.0 | |
| | | Z | 4.36 | 76.62 | 24.94 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.12 | 64.15 | 15.32 | 0.61 | 110.0 | $\pm 9.6\%$ |
| | | Y | 1.24 | 65.19 | 16.01 | | 110.0 | |
| | | Z | 1.10 | 63.98 | 15.09 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 17.73 | 112.41 | 29.57 | 1.30 | 110.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 139.22 | 36.38 | | 110.0 | |
| | | Z | 18.16 | 111.27 | 28.85 | | 110.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 2.73 | 80.78 | 22.58 | 2.04 | 110.0 | ± 9.6 % |
| | | Y | 4.63 | 89.02 | 25.72 | | 110.0 | |
| | | Z | 2.93 | 81.74 | 22.80 | | 110.0 | |
| 10062-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 4.61 | 66.43 | 16.43 | 0.49 | 100.0 | ± 9.6 % |
| | | Y | 4.69 | 66.64 | 16.54 | | 100.0 | |
| | | Z | 4.58 | 66.37 | 16.37 | | 100.0 | |
| 10063-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 4.63 | 66.53 | 16.53 | 0.72 | 100.0 | ± 9.6 % |
| | | Y | 4.71 | 66.75 | 16.66 | | 100.0 | |
| | | Z | 4.60 | 66.48 | 16.48 | | 100.0 | |
| 10064-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 4.92 | 66.82 | 16.78 | 0.86 | 100.0 | ± 9.6 % |
| | | Y | 5.01 | 67.04 | 16.90 | | 100.0 | |
| | | Z | 4.89 | 66.77 | 16.74 | | 100.0 | |
| 10065-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 4.78 | 66.71 | 16.89 | 1.21 | 100.0 | ± 9.6 % |
| | | Y | 4.88 | 66.96 | 17.03 | | 100.0 | |
| | | Z | 4.76 | 66.68 | 16.86 | | 100.0 | |
| 10066-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 4.80 | 66.75 | 17.07 | 1.46 | 100.0 | ± 9.6 % |
| | | Y | 4.90 | 67.00 | 17.22 | | 100.0 | |
| | | Z | 4.78 | 66.72 | 17.05 | | 100.0 | |
| 10067-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 5.09 | 66.94 | 17.54 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 5.19 | 67.20 | 17.70 | | 100.0 | |
| | | Z | 5.08 | 66.95 | 17.54 | | 100.0 | |
| 10068-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 5.14 | 66.99 | 17.78 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 5.25 | 67.29 | 17.97 | | 100.0 | |
| | | Z | 5.13 | 67.00 | 17.79 | | 100.0 | |
| 10069-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 5.22 | 66.99 | 17.97 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 5.33 | 67.29 | 18.16 | | 100.0 | |
| | | Z | 5.21 | 67.02 | 17.99 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 4.91 | 66.58 | 17.37 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 5.00 | 66.84 | 17.53 | | 100.0 | |
| | | Z | 4.90 | 66.59 | 17.37 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 4.88 | 66.90 | 17.60 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 4.99 | 67.19 | 17.78 | | 100.0 | |
| | | Z | 4.87 | 66.92 | 17.60 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 4.94 | 67.06 | 17.93 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 5.05 | 67.38 | 18.14 | | 100.0 | |
| | | Z | 4.94 | 67.10 | 17.96 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 4.92 | 66.94 | 18.08 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 5.03 | 67.28 | 18.32 | | 100.0 | |
| | | Z | 4.92 | 67.00 | 18.13 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 4.95 | 67.05 | 18.41 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 5.07 | 67.43 | 18.68 | | 90.0 | |
| | | Z | 4.96 | 67.12 | 18.46 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 4.96 | 66.81 | 18.52 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 5.07 | 67.20 | 18.79 | | 90.0 | |
| | | Z | 4.97 | 66.91 | 18.59 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 4.98 | 66.88 | 18.61 | 4.30 | 90.0 | ± 9.6 % |
| | | Y | 5.09 | 67.26 | 18.89 | | 90.0 | |
| | | Z | 4.99 | 66.97 | 18.68 | | 90.0 | |

EX3DV4-- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|---------|
| 10061-CAB | CDMA2000 (1xRTT, RC3) | X | 0.67 | 63.43 | 10.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.80 | 65.03 | 12.00 | | 150.0 | |
| | | Z | 0.60 | 62.42 | 9.53 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 0.74 | 60.59 | 4.32 | 4.77 | 80.0 | ± 9.6 % |
| | | Y | 0.77 | 60.00 | 4.71 | | 80.0 | |
| | | Z | 0.68 | 60.00 | 4.18 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 100.00 | 112.51 | 25.31 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 116.70 | 27.52 | | 60.0 | |
| | | Z | 100.00 | 112.75 | 25.49 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 1.70 | 66.59 | 14.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.80 | 67.17 | 15.37 | | 150.0 | |
| | | Z | 1.64 | 66.09 | 14.46 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.66 | 66.53 | 14.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.76 | 67.13 | 15.34 | | 150.0 | |
| | | Z | 1.60 | 66.03 | 14.41 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 8.62 | 92.18 | 33.31 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 18.17 | 112.67 | 41.07 | | 60.0 | |
| | | Z | 9.46 | 94.60 | 34.29 | | 60.0 | |
| 10100-CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 2.94 | 69.26 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.08 | 69.91 | 16.47 | | 150.0 | |
| | | Z | 2.86 | 68.79 | 15.77 | | 150.0 | |
| 10101-CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.13 | 66.93 | 15.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.23 | 67.31 | 15.81 | | 150.0 | |
| | | Z | 3.08 | 66.69 | 15.39 | | 150.0 | |
| 10102-CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.24 | 66.93 | 15.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.33 | 67.27 | 15.89 | | 150.0 | |
| | | Z | 3.19 | 66.70 | 15.51 | | 150.0 | |
| 10103-CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 5.89 | 75.24 | 20.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.02 | 77.93 | 21.63 | | 65.0 | |
| | | Z | 6.16 | 76.00 | 20.83 | | 65.0 | |
| 10104-CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 5.91 | 73.19 | 20.43 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.81 | 75.57 | 21.49 | | 65.0 | |
| | | Z | 5.99 | 73.46 | 20.55 | | 65.0 | |
| 10105-CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 5.43 | 71.36 | 19.90 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.17 | 73.49 | 20.88 | | 65.0 | |
| | | Z | 5.70 | 72.30 | 20.34 | | 65.0 | |
| 10108-CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 2.57 | 68.54 | 15.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.69 | 69.13 | 16.28 | | 150.0 | |
| | | Z | 2.49 | 68.09 | 15.58 | | 150.0 | |
| 10109-CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 2.78 | 66.74 | 15.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 67.12 | 15.68 | | 150.0 | |
| | | Z | 2.73 | 66.46 | 15.20 | | 150.0 | |
| 10110-CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.06 | 67.61 | 15.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.19 | 68.23 | 15.87 | | 150.0 | |
| | | Z | 1.99 | 67.12 | 15.05 | | 150.0 | |
| 10111-CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.47 | 67.39 | 15.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.57 | 67.74 | 15.85 | | 150.0 | |
| | | Z | 2.40 | 66.99 | 15.24 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10112-CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 2.91 | 66.77 | 15.51 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.00 | 67.11 | 15.74 | | 150.0 | |
| | | Z | 2.85 | 66.51 | 15.30 | | 150.0 | |
| 10113-CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 2.63 | 67.58 | 15.73 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.72 | 67.88 | 15.98 | | 150.0 | |
| | | Z | 2.56 | 67.21 | 15.43 | | 150.0 | |
| 10114-CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 5.07 | 66.97 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.13 | 67.11 | 16.40 | | 150.0 | |
| | | Z | 5.04 | 66.87 | 16.27 | | 150.0 | |
| 10115-CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.36 | 67.10 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.42 | 67.26 | 16.48 | | 150.0 | |
| | | Z | 5.32 | 67.00 | 16.35 | | 150.0 | |
| 10116-CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.17 | 67.15 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.22 | 67.31 | 16.42 | | 150.0 | |
| | | Z | 5.13 | 67.04 | 16.28 | | 150.0 | |
| 10117-CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 5.03 | 66.79 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.09 | 66.97 | 16.34 | | 150.0 | |
| | | Z | 4.99 | 66.69 | 16.20 | | 150.0 | |
| 10118-CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.45 | 67.34 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.50 | 67.47 | 16.60 | | 150.0 | |
| | | Z | 5.41 | 67.24 | 16.48 | | 150.0 | |
| 10119-CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 5.15 | 67.11 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.20 | 67.25 | 16.40 | | 150.0 | |
| | | Z | 5.11 | 67.02 | 16.28 | | 150.0 | |
| 10140-CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.27 | 66.94 | 15.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.37 | 67.29 | 15.82 | | 150.0 | |
| | | Z | 3.22 | 66.71 | 15.43 | | 150.0 | |
| 10141-CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.40 | 67.07 | 15.80 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.49 | 67.38 | 15.98 | | 150.0 | |
| | | Z | 3.35 | 66.84 | 15.63 | | 150.0 | |
| 10142-CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 1.82 | 67.38 | 14.89 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.95 | 66.11 | 15.47 | | 150.0 | |
| | | Z | 1.74 | 66.77 | 14.42 | | 150.0 | |
| 10143-CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.29 | 67.77 | 15.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.41 | 68.29 | 15.47 | | 150.0 | |
| | | Z | 2.19 | 67.17 | 14.54 | | 150.0 | |
| 10144-CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 2.09 | 65.65 | 13.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.22 | 66.30 | 14.02 | | 150.0 | |
| | | Z | 2.01 | 65.21 | 13.07 | | 150.0 | |
| 10145-CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 1.02 | 63.04 | 10.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.19 | 64.55 | 11.49 | | 150.0 | |
| | | Z | 0.94 | 62.23 | 9.40 | | 150.0 | |
| 10146-CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 1.64 | 64.33 | 10.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.25 | 67.70 | 12.40 | | 150.0 | |
| | | Z | 1.61 | 64.22 | 10.34 | | 150.0 | |
| 10147-CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 1.83 | 65.63 | 11.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.75 | 70.16 | 13.64 | | 150.0 | |
| | | Z | 1.80 | 65.52 | 11.13 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 10149-CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 2.79 | 66.80 | 15.47 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.89 | 67.17 | 15.72 | | 150.0 | |
| | | Z | 2.74 | 66.52 | 15.25 | | 150.0 | |
| 10150-CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 2.92 | 66.82 | 15.55 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.01 | 67.16 | 15.77 | | 150.0 | |
| | | Z | 2.86 | 66.56 | 15.34 | | 150.0 | |
| 10151-CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 6.38 | 78.39 | 21.90 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 7.96 | 81.84 | 23.27 | | 65.0 | |
| | | Z | 6.55 | 78.84 | 22.07 | | 65.0 | |
| 10152-CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 5.44 | 73.19 | 20.13 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.39 | 75.81 | 21.33 | | 65.0 | |
| | | Z | 5.54 | 73.50 | 20.26 | | 65.0 | |
| 10153-CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 5.81 | 74.18 | 20.94 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.76 | 76.68 | 22.05 | | 65.0 | |
| | | Z | 5.90 | 74.49 | 21.07 | | 65.0 | |
| 10154-CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.10 | 67.98 | 15.66 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.23 | 68.58 | 16.10 | | 150.0 | |
| | | Z | 2.03 | 67.46 | 15.28 | | 150.0 | |
| 10155-CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.48 | 67.41 | 15.58 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.58 | 67.75 | 15.87 | | 150.0 | |
| | | Z | 2.41 | 67.01 | 15.26 | | 150.0 | |
| 10156-CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 1.65 | 67.22 | 14.50 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.79 | 68.09 | 15.21 | | 150.0 | |
| | | Z | 1.56 | 66.49 | 13.94 | | 150.0 | |
| 10157-CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 1.89 | 65.92 | 13.28 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.04 | 66.73 | 13.98 | | 150.0 | |
| | | Z | 1.81 | 65.34 | 12.80 | | 150.0 | |
| 10158-CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 2.63 | 67.65 | 15.78 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.73 | 67.93 | 16.02 | | 150.0 | |
| | | Z | 2.56 | 67.26 | 15.47 | | 150.0 | |
| 10159-CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 1.99 | 66.31 | 13.54 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.14 | 67.12 | 14.23 | | 150.0 | |
| | | Z | 1.89 | 65.68 | 13.04 | | 150.0 | |
| 10160-CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 2.62 | 67.95 | 15.84 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.71 | 68.30 | 16.11 | | 150.0 | |
| | | Z | 2.56 | 67.61 | 15.57 | | 150.0 | |
| 10161-CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 2.81 | 66.75 | 15.45 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.91 | 67.09 | 15.69 | | 150.0 | |
| | | Z | 2.75 | 66.47 | 15.23 | | 150.0 | |
| 10162-CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 2.92 | 66.92 | 15.58 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.01 | 67.23 | 15.81 | | 150.0 | |
| | | Z | 2.86 | 66.66 | 15.36 | | 150.0 | |
| 10166-CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 3.47 | 69.06 | 18.90 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.75 | 70.40 | 19.62 | | 150.0 | |
| | | Z | 3.46 | 69.17 | 19.02 | | 150.0 | |
| 10167-CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 4.19 | 71.60 | 19.20 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.88 | 74.37 | 20.47 | | 150.0 | |
| | | Z | 4.17 | 71.73 | 19.32 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|-------------|
| 10168-CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 4.66 | 73.93 | 20.59 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.47 | 76.81 | 21.82 | | 150.0 | |
| | | Z | 4.64 | 74.07 | 20.71 | | 150.0 | |
| 10169-CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 2.85 | 68.15 | 16.49 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.24 | 70.73 | 19.81 | | 150.0 | |
| | | Z | 2.83 | 68.15 | 18.57 | | 150.0 | |
| 10170-CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 3.77 | 73.38 | 20.58 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.05 | 79.05 | 22.92 | | 150.0 | |
| | | Z | 3.72 | 73.34 | 20.65 | | 150.0 | |
| 10171-AAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 3.13 | 69.50 | 17.87 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.98 | 74.01 | 19.90 | | 150.0 | |
| | | Z | 3.11 | 69.53 | 17.97 | | 150.0 | |
| 10172-CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 6.35 | 87.03 | 27.58 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 15.94 | 106.71 | 34.46 | | 65.0 | |
| | | Z | 8.03 | 92.20 | 29.65 | | 65.0 | |
| 10173-CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 14.65 | 99.05 | 29.57 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 134.50 | 39.08 | | 65.0 | |
| | | Z | 17.81 | 103.32 | 31.13 | | 65.0 | |
| 10174-CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 10.22 | 91.37 | 26.56 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.83 | 37.69 | | 65.0 | |
| | | Z | 13.56 | 96.88 | 28.56 | | 65.0 | |
| 10175-CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 2.82 | 67.88 | 18.25 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.20 | 70.41 | 19.56 | | 150.0 | |
| | | Z | 2.80 | 67.86 | 18.33 | | 150.0 | |
| 10176-CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 3.78 | 73.40 | 20.59 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.06 | 79.08 | 22.94 | | 150.0 | |
| | | Z | 3.73 | 73.36 | 20.66 | | 150.0 | |
| 10177-CAI | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 2.84 | 68.00 | 18.34 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.22 | 70.56 | 19.65 | | 150.0 | |
| | | Z | 2.82 | 68.00 | 18.42 | | 150.0 | |
| 10178-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 3.75 | 73.20 | 20.48 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.00 | 78.82 | 22.81 | | 150.0 | |
| | | Z | 3.70 | 73.17 | 20.56 | | 150.0 | |
| 10179-CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 3.42 | 71.31 | 19.09 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.47 | 76.39 | 21.27 | | 150.0 | |
| | | Z | 3.39 | 71.32 | 19.18 | | 150.0 | |
| 10180-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 3.13 | 69.44 | 17.83 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.97 | 73.93 | 19.85 | | 150.0 | |
| | | Z | 3.10 | 69.48 | 17.93 | | 150.0 | |
| 10181-CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 2.84 | 67.98 | 18.33 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.22 | 70.55 | 19.65 | | 150.0 | |
| | | Z | 2.82 | 67.98 | 18.41 | | 150.0 | |
| 10182-CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 3.74 | 73.18 | 20.47 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.99 | 78.80 | 22.80 | | 150.0 | |
| | | Z | 3.69 | 73.15 | 20.55 | | 150.0 | |
| 10183-AAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 3.12 | 69.42 | 17.82 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.96 | 73.90 | 19.84 | | 150.0 | |
| | | Z | 3.10 | 69.45 | 17.92 | | 150.0 | |

EX3DV4—SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10184-CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 2.85 | 68.02 | 18.35 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.23 | 70.59 | 19.67 | | 150.0 | |
| | | Z | 2.83 | 68.02 | 18.43 | | 150.0 | |
| 10185-CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 3.76 | 73.25 | 20.51 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 5.02 | 78.88 | 22.84 | | 150.0 | |
| | | Z | 3.71 | 73.22 | 20.58 | | 150.0 | |
| 10186-AAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 3.14 | 69.48 | 17.85 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.98 | 73.98 | 19.87 | | 150.0 | |
| | | Z | 3.11 | 69.52 | 17.95 | | 150.0 | |
| 10187-CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 2.86 | 68.08 | 18.42 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.24 | 70.65 | 19.73 | | 150.0 | |
| | | Z | 2.84 | 68.08 | 18.50 | | 150.0 | |
| 10188-CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 3.87 | 73.87 | 20.88 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 5.21 | 79.68 | 23.25 | | 150.0 | |
| | | Z | 3.82 | 73.81 | 20.94 | | 150.0 | |
| 10189-AAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 3.20 | 69.87 | 18.12 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.09 | 74.49 | 20.17 | | 150.0 | |
| | | Z | 3.17 | 69.90 | 18.22 | | 150.0 | |
| 10193-CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.45 | 66.33 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.52 | 66.51 | 16.09 | | 150.0 | |
| | | Z | 4.41 | 66.22 | 15.89 | | 150.0 | |
| 10194-CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.62 | 66.63 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.69 | 66.83 | 16.21 | | 150.0 | |
| | | Z | 4.57 | 66.52 | 16.03 | | 150.0 | |
| 10195-CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.66 | 66.67 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.73 | 66.86 | 16.23 | | 150.0 | |
| | | Z | 4.61 | 66.56 | 16.05 | | 150.0 | |
| 10196-CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.45 | 66.38 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.52 | 66.57 | 16.10 | | 150.0 | |
| | | Z | 4.41 | 66.27 | 15.91 | | 150.0 | |
| 10197-CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 4.63 | 66.65 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.71 | 66.85 | 16.22 | | 150.0 | |
| | | Z | 4.59 | 66.54 | 16.04 | | 150.0 | |
| 10198-CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 4.66 | 66.68 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 66.88 | 16.24 | | 150.0 | |
| | | Z | 4.62 | 66.57 | 16.06 | | 150.0 | |
| 10219-CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.40 | 66.39 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.47 | 66.58 | 16.06 | | 150.0 | |
| | | Z | 4.36 | 66.27 | 15.86 | | 150.0 | |
| 10220-CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 4.62 | 66.62 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 66.82 | 16.21 | | 150.0 | |
| | | Z | 4.58 | 66.51 | 16.03 | | 150.0 | |
| 10221-CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 4.67 | 66.62 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 66.81 | 16.23 | | 150.0 | |
| | | Z | 4.63 | 66.51 | 16.05 | | 150.0 | |
| 10222-CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 5.01 | 66.80 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.07 | 66.99 | 16.34 | | 150.0 | |
| | | Z | 4.97 | 66.70 | 16.19 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|-------------|
| 10223-CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.33 | 67.09 | 16.44 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.37 | 67.19 | 16.47 | | 150.0 | |
| | | Z | 5.29 | 67.02 | 16.38 | | 150.0 | |
| 10224-CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.05 | 66.91 | 16.25 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.11 | 67.09 | 16.32 | | 150.0 | |
| | | Z | 5.01 | 66.81 | 16.17 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 2.70 | 65.61 | 14.92 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.79 | 65.91 | 15.17 | | 150.0 | |
| | | Z | 2.65 | 65.38 | 14.70 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 15.91 | 100.71 | 30.17 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 134.76 | 39.24 | | 65.0 | |
| | | Z | 19.48 | 105.15 | 31.77 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 15.46 | 98.54 | 28.84 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.75 | 37.69 | | 65.0 | |
| | | Z | 19.14 | 103.03 | 30.45 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 8.70 | 93.83 | 30.04 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 31.18 | 120.91 | 38.54 | | 65.0 | |
| | | Z | 9.84 | 96.88 | 31.33 | | 65.0 | |
| 10229-CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 14.77 | 99.16 | 29.61 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 134.48 | 39.08 | | 65.0 | |
| | | Z | 17.95 | 103.43 | 31.17 | | 65.0 | |
| 10230-CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 14.28 | 97.04 | 28.30 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.57 | 37.58 | | 65.0 | |
| | | Z | 17.53 | 101.34 | 29.87 | | 65.0 | |
| 10231-CAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 8.28 | 92.74 | 29.58 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 28.48 | 118.85 | 37.89 | | 65.0 | |
| | | Z | 9.33 | 95.69 | 30.85 | | 65.0 | |
| 10232-CAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 14.74 | 99.14 | 29.60 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 134.50 | 39.08 | | 65.0 | |
| | | Z | 17.92 | 103.41 | 31.17 | | 65.0 | |
| 10233-CAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 14.24 | 97.01 | 28.29 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.59 | 37.58 | | 65.0 | |
| | | Z | 17.48 | 101.31 | 29.86 | | 65.0 | |
| 10234-CAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 7.96 | 91.78 | 29.14 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 26.39 | 116.98 | 37.24 | | 65.0 | |
| | | Z | 8.95 | 94.67 | 30.39 | | 65.0 | |
| 10235-CAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 14.77 | 99.20 | 29.82 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 134.52 | 39.09 | | 65.0 | |
| | | Z | 17.96 | 103.48 | 31.19 | | 65.0 | |
| 10236-CAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 14.45 | 97.22 | 28.35 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.52 | 37.55 | | 65.0 | |
| | | Z | 17.77 | 101.56 | 29.93 | | 65.0 | |
| 10237-CAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 8.29 | 92.81 | 29.61 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 28.81 | 119.14 | 37.97 | | 65.0 | |
| | | Z | 9.36 | 95.78 | 30.89 | | 65.0 | |
| 10238-CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 14.71 | 99.12 | 29.60 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 134.52 | 39.09 | | 65.0 | |
| | | Z | 17.88 | 103.39 | 31.16 | | 65.0 | |

EX3DV4-- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|------|-------------|
| 10239-CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 14.19 | 96.97 | 28.28 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 131.62 | 37.59 | | 65.0 | |
| | | Z | 17.42 | 101.27 | 29.85 | | 65.0 | |
| 10240-CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 8.26 | 92.76 | 29.59 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 28.65 | 119.04 | 37.94 | | 65.0 | |
| | | Z | 9.32 | 95.73 | 30.87 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 7.59 | 80.37 | 25.35 | 6.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 10.04 | 86.74 | 28.12 | | 65.0 | |
| | | Z | 7.85 | 81.34 | 25.88 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.75 | 77.85 | 24.21 | 6.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 8.43 | 82.90 | 26.54 | | 65.0 | |
| | | Z | 7.30 | 79.75 | 25.14 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 5.48 | 74.42 | 23.60 | 6.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.39 | 77.98 | 25.46 | | 65.0 | |
| | | Z | 5.87 | 76.16 | 24.52 | | 65.0 | |
| 10244-CAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 5.71 | 76.00 | 18.70 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 8.34 | 81.60 | 21.07 | | 65.0 | |
| | | Z | 6.18 | 77.32 | 19.29 | | 65.0 | |
| 10245-CAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 5.52 | 75.19 | 18.30 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 7.93 | 80.50 | 20.60 | | 65.0 | |
| | | Z | 5.92 | 76.37 | 18.84 | | 65.0 | |
| 10246-CAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 5.55 | 79.41 | 20.24 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 8.48 | 85.64 | 22.77 | | 65.0 | |
| | | Z | 5.70 | 79.66 | 20.24 | | 65.0 | |
| 10247-CAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 4.73 | 73.67 | 18.61 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.88 | 76.83 | 20.12 | | 65.0 | |
| | | Z | 4.80 | 73.85 | 18.62 | | 65.0 | |
| 10248-CAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 4.69 | 72.99 | 18.29 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.79 | 76.03 | 19.77 | | 65.0 | |
| | | Z | 4.76 | 73.16 | 18.29 | | 65.0 | |
| 10249-CAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 6.83 | 83.08 | 22.65 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 10.11 | 89.16 | 24.96 | | 65.0 | |
| | | Z | 7.14 | 83.71 | 22.81 | | 65.0 | |
| 10250-CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 5.54 | 75.91 | 21.31 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.67 | 78.81 | 22.56 | | 65.0 | |
| | | Z | 5.66 | 76.27 | 21.42 | | 65.0 | |
| 10251-CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 5.27 | 73.65 | 19.94 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.28 | 76.41 | 21.21 | | 65.0 | |
| | | Z | 5.36 | 73.96 | 20.04 | | 65.0 | |
| 10252-CAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 6.69 | 81.76 | 23.20 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 9.02 | 86.54 | 25.02 | | 65.0 | |
| | | Z | 6.96 | 82.43 | 23.43 | | 65.0 | |
| 10253-CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 5.33 | 72.65 | 19.87 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.21 | 75.13 | 21.03 | | 65.0 | |
| | | Z | 5.42 | 72.95 | 19.99 | | 65.0 | |
| 10254-CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 5.67 | 73.57 | 20.59 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.57 | 75.98 | 21.09 | | 65.0 | |
| | | Z | 5.76 | 73.88 | 20.72 | | 65.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|------|-------------|
| 10255-CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.02 | 77.53 | 21.77 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 7.45 | 80.90 | 23.15 | | 65.0 | |
| | | Z | 6.18 | 78.00 | 21.96 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 4.22 | 71.25 | 15.55 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.28 | 76.68 | 18.08 | | 65.0 | |
| | | Z | 4.50 | 72.23 | 16.02 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 4.05 | 70.31 | 15.02 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.87 | 75.29 | 17.42 | | 65.0 | |
| | | Z | 4.28 | 71.12 | 15.42 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 3.88 | 73.49 | 16.91 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.91 | 79.26 | 19.55 | | 65.0 | |
| | | Z | 3.89 | 73.38 | 16.75 | | 65.0 | |
| 10259-CAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 5.06 | 74.57 | 19.62 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.21 | 77.60 | 21.01 | | 65.0 | |
| | | Z | 5.16 | 74.84 | 19.67 | | 65.0 | |
| 10260-CAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 5.08 | 74.24 | 19.47 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.18 | 77.16 | 20.83 | | 65.0 | |
| | | Z | 5.17 | 74.49 | 19.52 | | 65.0 | |
| 10261-CAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 6.31 | 81.37 | 22.47 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 8.82 | 86.60 | 24.51 | | 65.0 | |
| | | Z | 6.58 | 82.00 | 22.65 | | 65.0 | |
| 10262-CAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 5.53 | 75.85 | 21.26 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.66 | 78.76 | 22.52 | | 65.0 | |
| | | Z | 5.64 | 76.21 | 21.38 | | 65.0 | |
| 10263-CAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 5.26 | 73.62 | 19.93 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.27 | 76.38 | 21.20 | | 65.0 | |
| | | Z | 5.35 | 73.94 | 20.03 | | 65.0 | |
| 10264-CAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 6.81 | 81.54 | 23.09 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 8.92 | 86.30 | 24.91 | | 65.0 | |
| | | Z | 6.88 | 82.20 | 23.32 | | 65.0 | |
| 10265-CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 5.44 | 73.20 | 20.14 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.39 | 75.80 | 21.33 | | 65.0 | |
| | | Z | 5.53 | 73.50 | 20.27 | | 65.0 | |
| 10266-CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 5.80 | 74.17 | 20.93 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.76 | 76.67 | 22.04 | | 65.0 | |
| | | Z | 5.90 | 74.48 | 21.06 | | 65.0 | |
| 10267-CAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 6.37 | 78.34 | 21.88 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 7.94 | 81.79 | 23.25 | | 65.0 | |
| | | Z | 6.54 | 78.79 | 22.05 | | 65.0 | |
| 10268-CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 6.05 | 73.02 | 20.46 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.91 | 75.24 | 21.46 | | 65.0 | |
| | | Z | 6.13 | 73.28 | 20.58 | | 65.0 | |
| 10269-CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 6.03 | 72.59 | 20.31 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.85 | 74.73 | 21.29 | | 65.0 | |
| | | Z | 6.11 | 72.84 | 20.43 | | 65.0 | |
| 10270-CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.16 | 75.30 | 20.76 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 7.23 | 77.79 | 21.80 | | 65.0 | |
| | | Z | 6.27 | 75.60 | 20.89 | | 65.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|-------|-------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.48 | 65.89 | 14.77 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.57 | 66.26 | 15.08 | | 150.0 | |
| | | Z | 2.43 | 65.63 | 14.53 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.46 | 66.57 | 14.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.58 | 67.38 | 15.22 | | 150.0 | |
| | | Z | 1.40 | 65.98 | 14.11 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 1.89 | 60.99 | 6.60 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 2.04 | 61.80 | 7.27 | | 50.0 | |
| | | Z | 1.93 | 61.08 | 6.68 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 5.01 | 74.12 | 16.13 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 10.14 | 84.97 | 20.68 | | 50.0 | |
| | | Z | 5.05 | 74.09 | 16.12 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 5.19 | 74.51 | 16.36 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 10.43 | 85.32 | 20.88 | | 50.0 | |
| | | Z | 5.22 | 74.48 | 16.34 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 1.14 | 65.76 | 11.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.35 | 67.60 | 13.38 | | 150.0 | |
| | | Z | 1.03 | 64.58 | 11.03 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 0.66 | 63.28 | 10.35 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.78 | 64.84 | 11.89 | | 150.0 | |
| | | Z | 0.59 | 62.30 | 9.44 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 0.77 | 65.89 | 12.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.96 | 68.30 | 13.99 | | 150.0 | |
| | | Z | 0.66 | 64.23 | 10.80 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 1.08 | 70.27 | 14.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.37 | 73.27 | 16.65 | | 150.0 | |
| | | Z | 0.87 | 67.38 | 12.83 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 12.10 | 90.80 | 25.88 | 9.03 | 50.0 | ± 9.6 % |
| | | Y | 14.51 | 95.81 | 28.29 | | 50.0 | |
| | | Z | 13.51 | 92.56 | 26.41 | | 50.0 | |
| 10297-AAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 2.58 | 68.64 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.70 | 69.22 | 16.34 | | 150.0 | |
| | | Z | 2.50 | 68.17 | 15.65 | | 150.0 | |
| 10298-AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 1.33 | 65.58 | 12.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.50 | 66.88 | 13.65 | | 150.0 | |
| | | Z | 1.23 | 64.89 | 11.86 | | 150.0 | |
| 10299-AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 2.27 | 67.72 | 13.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.10 | 71.52 | 15.11 | | 150.0 | |
| | | Z | 2.26 | 67.85 | 13.23 | | 150.0 | |
| 10300-AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 1.77 | 63.95 | 10.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.17 | 66.08 | 11.91 | | 150.0 | |
| | | Z | 1.74 | 63.91 | 10.54 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 4.74 | 65.53 | 17.46 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.92 | 66.12 | 17.84 | | 50.0 | |
| | | Z | 4.67 | 65.40 | 17.36 | | 50.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.15 | 65.82 | 17.99 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 5.33 | 66.49 | 18.44 | | 50.0 | |
| | | Z | 5.17 | 65.97 | 18.01 | | 50.0 | |

EX3DV4– SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|-------|-------|-------|-------|-------|-------------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 4.90 | 65.45 | 17.81 | 4.96 | 50.0 | $\pm 9.6\%$ |
| | | Y | 5.08 | 66.14 | 18.28 | | 50.0 | |
| | | Z | 4.92 | 65.62 | 17.83 | | 50.0 | |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 4.71 | 65.31 | 17.29 | 4.17 | 50.0 | $\pm 9.6\%$ |
| | | Y | 4.88 | 65.94 | 17.70 | | 50.0 | |
| | | Z | 4.72 | 65.44 | 17.29 | | 50.0 | |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 4.32 | 67.25 | 19.33 | 6.02 | 35.0 | $\pm 9.6\%$ |
| | | Y | 4.49 | 67.99 | 19.97 | | 35.0 | |
| | | Z | 4.43 | 67.86 | 19.55 | | 35.0 | |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 4.65 | 66.33 | 18.99 | 6.02 | 35.0 | $\pm 9.6\%$ |
| | | Y | 4.80 | 66.94 | 19.51 | | 35.0 | |
| | | Z | 4.71 | 66.75 | 19.14 | | 35.0 | |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 4.54 | 66.47 | 18.94 | 6.02 | 35.0 | $\pm 9.6\%$ |
| | | Y | 4.70 | 67.11 | 19.48 | | 35.0 | |
| | | Z | 4.61 | 66.90 | 19.09 | | 35.0 | |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 4.52 | 66.66 | 19.07 | 6.02 | 35.0 | $\pm 9.6\%$ |
| | | Y | 4.68 | 67.33 | 19.63 | | 35.0 | |
| | | Z | 4.59 | 67.13 | 19.24 | | 35.0 | |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 4.70 | 66.54 | 19.13 | 6.02 | 35.0 | $\pm 9.6\%$ |
| | | Y | 4.86 | 67.20 | 19.68 | | 35.0 | |
| | | Z | 4.77 | 66.96 | 19.29 | | 35.0 | |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 4.60 | 66.38 | 18.96 | 6.02 | 35.0 | $\pm 9.6\%$ |
| | | Y | 4.75 | 67.00 | 19.48 | | 35.0 | |
| | | Z | 4.66 | 66.81 | 19.12 | | 35.0 | |
| 10311-AAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 2.92 | 67.94 | 15.67 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.06 | 68.53 | 16.01 | | 150.0 | |
| | | Z | 2.84 | 67.50 | 15.38 | | 150.0 | |
| 10313-AAA | iDEN 1:3 | X | 3.59 | 74.52 | 16.76 | 6.99 | 70.0 | $\pm 9.6\%$ |
| | | Y | 7.81 | 84.35 | 20.54 | | 70.0 | |
| | | Z | 3.75 | 74.74 | 16.77 | | 70.0 | |
| 10314-AAA | iDEN 1:6 | X | 6.18 | 85.62 | 23.85 | 10.00 | 30.0 | $\pm 9.6\%$ |
| | | Y | 11.31 | 96.43 | 27.87 | | 30.0 | |
| | | Z | 6.24 | 85.41 | 23.69 | | 30.0 | |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.00 | 62.92 | 14.51 | 0.17 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.08 | 63.58 | 15.01 | | 150.0 | |
| | | Z | 0.98 | 62.64 | 14.20 | | 150.0 | |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle) | X | 4.51 | 66.40 | 16.17 | 0.17 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.59 | 66.62 | 16.28 | | 150.0 | |
| | | Z | 4.47 | 66.32 | 16.09 | | 150.0 | |
| 10317-AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.51 | 66.40 | 16.17 | 0.17 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.59 | 66.62 | 16.28 | | 150.0 | |
| | | Z | 4.47 | 66.32 | 16.09 | | 150.0 | |
| 10400-AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 4.61 | 66.69 | 16.12 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.69 | 66.90 | 16.22 | | 150.0 | |
| | | Z | 4.56 | 66.58 | 16.02 | | 150.0 | |
| 10401-AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 5.36 | 67.03 | 16.39 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.40 | 67.13 | 16.42 | | 150.0 | |
| | | Z | 5.33 | 66.97 | 16.33 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|-------------|
| 10402-AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.57 | 67.19 | 16.33 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.64 | 67.39 | 16.40 | | 150.0 | |
| | | Z | 5.53 | 67.09 | 16.25 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 1.14 | 65.76 | 11.93 | 0.00 | 115.0 | $\pm 9.6\%$ |
| | | Y | 1.35 | 67.60 | 13.38 | | 115.0 | |
| | | Z | 1.03 | 64.58 | 11.03 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 1.14 | 65.76 | 11.93 | 0.00 | 115.0 | $\pm 9.6\%$ |
| | | Y | 1.35 | 67.60 | 13.38 | | 115.0 | |
| | | Z | 1.03 | 64.58 | 11.03 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 18.73 | 99.86 | 26.25 | 0.00 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 118.89 | 29.03 | | 100.0 | |
| | | Z | 26.61 | 105.17 | 26.73 | | 100.0 | |
| 10410-AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | X | 100.00 | 125.74 | 31.85 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 125.21 | 31.87 | | 80.0 | |
| | | Z | 100.00 | 127.36 | 32.62 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 0.94 | 62.19 | 13.93 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.01 | 62.70 | 14.36 | | 150.0 | |
| | | Z | 0.91 | 61.87 | 13.58 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.45 | 66.36 | 16.06 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.52 | 66.55 | 16.15 | | 150.0 | |
| | | Z | 4.41 | 66.26 | 15.97 | | 150.0 | |
| 10417-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.45 | 66.36 | 16.06 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.52 | 66.55 | 16.15 | | 150.0 | |
| | | Z | 4.41 | 66.26 | 15.97 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble) | X | 4.44 | 66.52 | 16.08 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.51 | 66.71 | 16.17 | | 150.0 | |
| | | Z | 4.40 | 66.41 | 15.98 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.46 | 66.47 | 16.08 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.53 | 66.66 | 16.17 | | 150.0 | |
| | | Z | 4.42 | 66.36 | 15.99 | | 150.0 | |
| 10422-AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.58 | 66.48 | 16.11 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.65 | 66.66 | 16.19 | | 150.0 | |
| | | Z | 4.54 | 66.37 | 16.01 | | 150.0 | |
| 10423-AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 4.74 | 66.78 | 16.22 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.82 | 66.98 | 16.31 | | 150.0 | |
| | | Z | 4.69 | 66.67 | 16.12 | | 150.0 | |
| 10424-AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 4.66 | 66.73 | 16.19 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.74 | 66.93 | 16.28 | | 150.0 | |
| | | Z | 4.62 | 66.62 | 16.09 | | 150.0 | |
| 10425-AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.28 | 67.10 | 16.42 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.34 | 67.25 | 16.47 | | 150.0 | |
| | | Z | 5.24 | 66.99 | 16.34 | | 150.0 | |
| 10426-AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.31 | 67.19 | 16.46 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.35 | 67.28 | 16.48 | | 150.0 | |
| | | Z | 5.27 | 67.10 | 16.39 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|------|-------|---------|
| 10427-AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.31 | 67.11 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.36 | 67.25 | 16.47 | | 150.0 | |
| | | Z | 5.27 | 67.02 | 16.35 | | 150.0 | |
| 10430-AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.13 | 70.48 | 17.90 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.14 | 70.12 | 17.76 | | 150.0 | |
| | | Z | 4.04 | 70.12 | 17.62 | | 150.0 | |
| 10431-AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 4.11 | 66.86 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.20 | 67.07 | 16.12 | | 150.0 | |
| | | Z | 4.06 | 66.72 | 15.86 | | 150.0 | |
| 10432-AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.42 | 66.76 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.50 | 66.96 | 16.22 | | 150.0 | |
| | | Z | 4.37 | 66.64 | 16.00 | | 150.0 | |
| 10433-AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 4.67 | 66.76 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.75 | 66.96 | 16.30 | | 150.0 | |
| | | Z | 4.63 | 66.65 | 16.11 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.21 | 71.23 | 17.77 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.20 | 70.85 | 17.67 | | 150.0 | |
| | | Z | 4.08 | 70.76 | 17.43 | | 150.0 | |
| 10435-AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 125.51 | 31.74 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 124.99 | 31.77 | | 80.0 | |
| | | Z | 100.00 | 127.13 | 32.51 | | 80.0 | |
| 10447-AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.37 | 66.69 | 15.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.48 | 67.00 | 15.38 | | 150.0 | |
| | | Z | 3.30 | 66.46 | 14.90 | | 150.0 | |
| 10448-AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 3.95 | 66.63 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.04 | 66.85 | 15.98 | | 150.0 | |
| | | Z | 3.90 | 66.49 | 15.71 | | 150.0 | |
| 10449-AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.24 | 66.58 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.31 | 66.78 | 16.11 | | 150.0 | |
| | | Z | 4.19 | 66.45 | 15.89 | | 150.0 | |
| 10450-AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.44 | 66.52 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.51 | 66.72 | 16.15 | | 150.0 | |
| | | Z | 4.40 | 66.40 | 15.95 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 3.23 | 66.72 | 14.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.36 | 67.12 | 14.96 | | 150.0 | |
| | | Z | 3.16 | 66.43 | 14.35 | | 150.0 | |
| 10456-AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.17 | 67.68 | 16.60 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.21 | 67.80 | 16.63 | | 150.0 | |
| | | Z | 6.14 | 67.60 | 16.55 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.73 | 65.01 | 15.76 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.79 | 65.20 | 15.86 | | 150.0 | |
| | | Z | 3.69 | 64.91 | 15.66 | | 150.0 | |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 3.82 | 70.31 | 17.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.87 | 70.19 | 17.09 | | 150.0 | |
| | | Z | 3.70 | 69.82 | 16.64 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 5.02 | 68.38 | 18.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.01 | 68.01 | 17.87 | | 150.0 | |
| | | Z | 4.90 | 68.02 | 17.80 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|-------------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 0.77 | 66.07 | 14.49 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.87 | 67.17 | 15.47 | | 150.0 | |
| | | Z | 0.71 | 65.16 | 13.72 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 129.90 | 33.85 | 3.29 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 132.00 | 35.01 | | 80.0 | |
| | | Z | 100.00 | 132.22 | 34.92 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.87 | 74.90 | 15.08 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 108.52 | 24.03 | | 80.0 | |
| | | Z | 38.61 | 99.17 | 22.00 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.47 | 64.49 | 10.53 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 18.61 | 88.22 | 18.26 | | 80.0 | |
| | | Z | 2.38 | 69.36 | 12.68 | | 80.0 | |
| 10464-AAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 126.98 | 32.32 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 129.46 | 33.65 | | 80.0 | |
| | | Z | 100.00 | 129.44 | 33.45 | | 80.0 | |
| 10465-AAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.64 | 70.91 | 13.61 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 107.75 | 23.67 | | 80.0 | |
| | | Z | 9.59 | 84.57 | 18.17 | | 80.0 | |
| 10466-AAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.32 | 63.40 | 9.99 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 7.36 | 79.35 | 15.77 | | 80.0 | |
| | | Z | 1.85 | 66.87 | 11.66 | | 80.0 | |
| 10467-AAE | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 127.32 | 32.47 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 129.78 | 33.79 | | 80.0 | |
| | | Z | 100.00 | 129.78 | 33.60 | | 80.0 | |
| 10468-AAE | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.89 | 71.87 | 13.98 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 108.00 | 23.78 | | 80.0 | |
| | | Z | 12.94 | 87.74 | 19.07 | | 80.0 | |
| 10469-AAE | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.32 | 63.43 | 10.00 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 7.57 | 79.64 | 15.85 | | 80.0 | |
| | | Z | 1.86 | 66.94 | 11.68 | | 80.0 | |
| 10470-AAE | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 127.35 | 32.48 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 129.83 | 33.80 | | 80.0 | |
| | | Z | 100.00 | 129.83 | 33.61 | | 80.0 | |
| 10471-AAE | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.85 | 71.73 | 13.91 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 107.91 | 23.73 | | 80.0 | |
| | | Z | 12.63 | 87.45 | 18.98 | | 80.0 | |
| 10472-AAE | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.31 | 63.37 | 9.96 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 7.42 | 79.41 | 15.76 | | 80.0 | |
| | | Z | 1.85 | 66.64 | 11.63 | | 80.0 | |
| 10473-AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 127.31 | 32.46 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 129.79 | 33.78 | | 80.0 | |
| | | Z | 100.00 | 129.79 | 33.59 | | 80.0 | |
| 10474-AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.82 | 71.64 | 13.88 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 107.92 | 23.73 | | 80.0 | |
| | | Z | 12.30 | 87.19 | 18.91 | | 80.0 | |
| 10475-AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.31 | 63.34 | 9.94 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 7.28 | 79.25 | 15.72 | | 80.0 | |
| | | Z | 1.83 | 66.79 | 11.61 | | 80.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|------|---------|
| 10477-AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.62 | 70.87 | 13.57 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 107.68 | 23.62 | | 80.0 | |
| | | Z | 9.80 | 84.77 | 18.21 | | 80.0 | |
| 10478-AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.30 | 63.28 | 9.91 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 7.06 | 78.93 | 15.61 | | 80.0 | |
| | | Z | 1.82 | 66.68 | 11.55 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 9.70 | 91.06 | 24.81 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 17.04 | 100.06 | 27.83 | | 80.0 | |
| | | Z | 16.10 | 99.35 | 27.41 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 8.70 | 83.60 | 20.39 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 25.58 | 96.26 | 24.94 | | 80.0 | |
| | | Z | 14.49 | 90.66 | 22.64 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.35 | 78.71 | 18.36 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 16.87 | 91.50 | 22.61 | | 80.0 | |
| | | Z | 9.60 | 84.24 | 20.25 | | 80.0 | |
| 10482-AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.65 | 70.99 | 16.26 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.78 | 75.55 | 18.44 | | 80.0 | |
| | | Z | 2.58 | 70.58 | 15.95 | | 80.0 | |
| 10483-AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.26 | 73.54 | 16.84 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 6.80 | 79.82 | 19.49 | | 80.0 | |
| | | Z | 5.19 | 76.27 | 17.90 | | 80.0 | |
| 10484-AAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.91 | 72.14 | 16.30 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.99 | 77.84 | 18.79 | | 80.0 | |
| | | Z | 4.59 | 74.40 | 17.21 | | 80.0 | |
| 10485-AAE | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.05 | 72.90 | 18.14 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.95 | 76.31 | 19.73 | | 80.0 | |
| | | Z | 3.06 | 72.88 | 18.03 | | 80.0 | |
| 10486-AAE | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.92 | 68.63 | 15.74 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.52 | 70.98 | 17.01 | | 80.0 | |
| | | Z | 2.89 | 68.46 | 15.56 | | 80.0 | |
| 10487-AAE | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.91 | 68.22 | 15.54 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.49 | 70.47 | 16.77 | | 80.0 | |
| | | Z | 2.88 | 68.04 | 15.36 | | 80.0 | |
| 10488-AAE | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.32 | 71.98 | 18.56 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.99 | 74.45 | 19.69 | | 80.0 | |
| | | Z | 3.34 | 72.06 | 18.55 | | 80.0 | |
| 10489-AAE | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.25 | 68.48 | 17.05 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.66 | 69.98 | 17.82 | | 80.0 | |
| | | Z | 3.25 | 68.52 | 17.02 | | 80.0 | |
| 10490-AAE | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.34 | 68.33 | 17.00 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.74 | 69.75 | 17.74 | | 80.0 | |
| | | Z | 3.34 | 68.37 | 16.96 | | 80.0 | |
| 10491-AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.55 | 70.45 | 18.07 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.09 | 72.36 | 18.94 | | 80.0 | |
| | | Z | 3.56 | 70.52 | 18.06 | | 80.0 | |
| 10492-AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.60 | 67.75 | 17.07 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.96 | 69.00 | 17.69 | | 80.0 | |
| | | Z | 3.61 | 67.80 | 17.06 | | 80.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|-------------|
| 10493-AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.67 | 67.64 | 17.03 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.02 | 68.84 | 17.63 | | 80.0 | |
| | | Z | 3.67 | 67.68 | 17.02 | | 80.0 | |
| 10494-AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.85 | 71.95 | 18.54 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.51 | 74.15 | 19.51 | | 80.0 | |
| | | Z | 3.86 | 71.99 | 18.52 | | 80.0 | |
| 10495-AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.63 | 68.11 | 17.26 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.00 | 69.41 | 17.90 | | 80.0 | |
| | | Z | 3.63 | 68.15 | 17.26 | | 80.0 | |
| 10496-AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.71 | 67.85 | 17.19 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.07 | 69.08 | 17.79 | | 80.0 | |
| | | Z | 3.71 | 67.90 | 17.18 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.75 | 65.66 | 12.81 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 2.70 | 70.76 | 15.51 | | 80.0 | |
| | | Z | 1.87 | 64.98 | 12.32 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.38 | 60.53 | 9.12 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 1.84 | 63.33 | 11.05 | | 80.0 | |
| | | Z | 1.32 | 60.12 | 8.74 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.34 | 60.07 | 8.72 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 1.76 | 62.61 | 10.54 | | 80.0 | |
| | | Z | 1.33 | 60.00 | 8.53 | | 80.0 | |
| 10500-AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.11 | 72.23 | 18.21 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.87 | 75.11 | 19.56 | | 80.0 | |
| | | Z | 3.13 | 72.29 | 18.15 | | 80.0 | |
| 10501-AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.08 | 68.70 | 16.31 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.59 | 70.61 | 17.33 | | 80.0 | |
| | | Z | 3.07 | 68.64 | 16.19 | | 80.0 | |
| 10502-AAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.14 | 68.55 | 16.17 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.64 | 70.41 | 17.18 | | 80.0 | |
| | | Z | 3.12 | 68.48 | 16.06 | | 80.0 | |
| 10503-AAE | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.27 | 71.77 | 18.46 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.94 | 74.25 | 19.60 | | 80.0 | |
| | | Z | 3.29 | 71.86 | 18.45 | | 80.0 | |
| 10504-AAE | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.23 | 68.38 | 17.00 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.64 | 69.90 | 17.77 | | 80.0 | |
| | | Z | 3.24 | 68.42 | 16.96 | | 80.0 | |
| 10505-AAE | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.32 | 68.23 | 16.94 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.72 | 69.57 | 17.68 | | 80.0 | |
| | | Z | 3.33 | 68.27 | 16.91 | | 80.0 | |
| 10506-AAE | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.82 | 71.80 | 18.46 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.48 | 74.01 | 19.44 | | 80.0 | |
| | | Z | 3.83 | 71.85 | 18.45 | | 80.0 | |
| 10507-AAE | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.61 | 68.04 | 17.23 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.99 | 69.36 | 17.87 | | 80.0 | |
| | | Z | 3.62 | 68.09 | 17.22 | | 80.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10508-AAE | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.70 | 67.79 | 17.14 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.06 | 69.02 | 17.75 | | 80.0 | |
| | | Z | 3.70 | 67.83 | 17.14 | | 80.0 | |
| 10509-AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.16 | 70.56 | 17.95 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.71 | 72.27 | 18.72 | | 80.0 | |
| | | Z | 4.16 | 70.57 | 17.93 | | 80.0 | |
| 10510-AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.10 | 67.80 | 17.22 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.46 | 68.96 | 17.77 | | 80.0 | |
| | | Z | 4.10 | 67.63 | 17.22 | | 80.0 | |
| 10511-AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.15 | 67.56 | 17.16 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.50 | 68.67 | 17.69 | | 80.0 | |
| | | Z | 4.16 | 67.60 | 17.16 | | 80.0 | |
| 10512-AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.33 | 72.08 | 18.43 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 5.03 | 74.19 | 19.34 | | 80.0 | |
| | | Z | 4.34 | 72.08 | 18.40 | | 80.0 | |
| 10513-AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.98 | 68.03 | 17.32 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.35 | 68.28 | 17.91 | | 80.0 | |
| | | Z | 3.99 | 68.06 | 17.32 | | 80.0 | |
| 10514-AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.01 | 67.63 | 17.20 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.36 | 68.80 | 17.75 | | 80.0 | |
| | | Z | 4.01 | 67.66 | 17.20 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.90 | 62.32 | 13.94 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.97 | 62.85 | 14.40 | | 150.0 | |
| | | Z | 0.87 | 61.98 | 13.57 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 0.47 | 67.11 | 14.64 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.56 | 68.58 | 16.14 | | 150.0 | |
| | | Z | 0.42 | 65.78 | 13.44 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.73 | 63.74 | 14.17 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.81 | 64.51 | 14.86 | | 150.0 | |
| | | Z | 0.70 | 63.20 | 13.62 | | 150.0 | |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.44 | 66.44 | 16.04 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.52 | 66.63 | 16.13 | | 150.0 | |
| | | Z | 4.40 | 66.33 | 15.94 | | 150.0 | |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.62 | 66.67 | 16.16 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.70 | 66.86 | 16.25 | | 150.0 | |
| | | Z | 4.58 | 66.56 | 16.06 | | 150.0 | |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.47 | 66.61 | 16.07 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.55 | 66.81 | 16.17 | | 150.0 | |
| | | Z | 4.43 | 66.49 | 15.97 | | 150.0 | |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.40 | 66.59 | 16.05 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.48 | 66.80 | 16.15 | | 150.0 | |
| | | Z | 4.36 | 66.47 | 15.94 | | 150.0 | |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.47 | 66.71 | 16.15 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.54 | 66.90 | 16.24 | | 150.0 | |
| | | Z | 4.42 | 66.60 | 16.05 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.35 | 66.57 | 15.99 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.43 | 66.77 | 16.09 | | 150.0 | |
| | | Z | 4.31 | 66.45 | 15.89 | | 150.0 | |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.41 | 66.62 | 16.11 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.49 | 66.82 | 16.21 | | 150.0 | |
| | | Z | 4.36 | 66.51 | 16.01 | | 150.0 | |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.40 | 65.67 | 15.71 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.48 | 65.87 | 15.80 | | 150.0 | |
| | | Z | 4.36 | 65.55 | 15.61 | | 150.0 | |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.56 | 66.02 | 15.85 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.64 | 66.23 | 15.94 | | 150.0 | |
| | | Z | 4.51 | 65.90 | 15.75 | | 150.0 | |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.48 | 65.97 | 15.78 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.56 | 66.18 | 15.88 | | 150.0 | |
| | | Z | 4.44 | 65.85 | 15.68 | | 150.0 | |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.50 | 65.99 | 15.81 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.58 | 66.20 | 15.91 | | 150.0 | |
| | | Z | 4.45 | 65.86 | 15.71 | | 150.0 | |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.50 | 65.99 | 15.81 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.58 | 66.20 | 15.91 | | 150.0 | |
| | | Z | 4.45 | 65.86 | 15.71 | | 150.0 | |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.48 | 66.07 | 15.82 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.56 | 66.29 | 15.92 | | 150.0 | |
| | | Z | 4.43 | 65.94 | 15.71 | | 150.0 | |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.35 | 65.92 | 15.74 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.43 | 66.14 | 15.85 | | 150.0 | |
| | | Z | 4.30 | 65.78 | 15.63 | | 150.0 | |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.51 | 66.04 | 15.81 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.59 | 66.25 | 15.90 | | 150.0 | |
| | | Z | 4.46 | 65.92 | 15.70 | | 150.0 | |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 5.05 | 66.12 | 15.91 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.11 | 66.31 | 15.98 | | 150.0 | |
| | | Z | 5.01 | 66.01 | 15.83 | | 150.0 | |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 5.12 | 66.32 | 16.01 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.18 | 66.49 | 16.07 | | 150.0 | |
| | | Z | 5.08 | 66.22 | 15.92 | | 150.0 | |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 4.99 | 66.25 | 15.95 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.05 | 66.44 | 16.02 | | 150.0 | |
| | | Z | 4.95 | 66.14 | 15.86 | | 150.0 | |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 5.04 | 66.22 | 15.94 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.11 | 66.41 | 16.01 | | 150.0 | |
| | | Z | 5.00 | 66.11 | 15.85 | | 150.0 | |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 5.13 | 66.24 | 15.99 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.20 | 66.43 | 16.06 | | 150.0 | |
| | | Z | 5.09 | 66.13 | 15.90 | | 150.0 | |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 5.07 | 66.28 | 16.02 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.13 | 66.45 | 16.08 | | 150.0 | |
| | | Z | 5.03 | 66.16 | 15.93 | | 150.0 | |

EX3DV4– SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 5.04 | 66.12 | 15.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.10 | 66.31 | 16.01 | | 150.0 | |
| | | Z | 5.00 | 66.01 | 15.85 | | 150.0 | |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.19 | 66.21 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.26 | 66.39 | 16.06 | | 150.0 | |
| | | Z | 5.15 | 66.10 | 15.91 | | 150.0 | |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.27 | 66.24 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.33 | 66.42 | 16.10 | | 150.0 | |
| | | Z | 5.22 | 66.14 | 15.96 | | 150.0 | |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.37 | 66.24 | 15.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.43 | 66.44 | 15.99 | | 150.0 | |
| | | Z | 5.33 | 66.14 | 15.84 | | 150.0 | |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.57 | 66.70 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.62 | 66.84 | 16.14 | | 150.0 | |
| | | Z | 5.53 | 66.60 | 16.03 | | 150.0 | |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.43 | 66.43 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.49 | 66.63 | 16.05 | | 150.0 | |
| | | Z | 5.39 | 66.32 | 15.90 | | 150.0 | |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.50 | 66.49 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.56 | 66.67 | 16.06 | | 150.0 | |
| | | Z | 5.46 | 66.39 | 15.92 | | 150.0 | |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.77 | 67.48 | 16.47 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.79 | 67.55 | 16.48 | | 150.0 | |
| | | Z | 5.72 | 67.37 | 16.39 | | 150.0 | |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.47 | 66.50 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 66.66 | 16.07 | | 150.0 | |
| | | Z | 5.43 | 66.41 | 15.95 | | 150.0 | |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.46 | 66.50 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 66.70 | 16.05 | | 150.0 | |
| | | Z | 5.42 | 66.39 | 15.90 | | 150.0 | |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.38 | 66.30 | 15.89 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.44 | 66.50 | 15.96 | | 150.0 | |
| | | Z | 5.34 | 66.19 | 15.81 | | 150.0 | |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.46 | 66.33 | 15.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 66.54 | 16.01 | | 150.0 | |
| | | Z | 5.42 | 66.22 | 15.86 | | 150.0 | |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.79 | 66.62 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.84 | 66.80 | 16.08 | | 150.0 | |
| | | Z | 5.75 | 66.52 | 15.95 | | 150.0 | |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.92 | 66.94 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.96 | 67.09 | 16.20 | | 150.0 | |
| | | Z | 5.88 | 66.84 | 16.08 | | 150.0 | |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 5.94 | 66.98 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.98 | 67.14 | 16.22 | | 150.0 | |
| | | Z | 5.90 | 66.88 | 16.10 | | 150.0 | |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.89 | 66.86 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.95 | 67.04 | 16.19 | | 150.0 | |
| | | Z | 5.86 | 66.75 | 16.06 | | 150.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 5.94 | 67.02 | 16.23 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.99 | 67.20 | 16.29 | | 150.0 | |
| | | Z | 5.90 | 66.92 | 16.15 | | 150.0 | |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 5.93 | 66.86 | 16.19 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.99 | 67.06 | 16.25 | | 150.0 | |
| | | Z | 5.89 | 66.76 | 16.11 | | 150.0 | |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 5.86 | 66.86 | 16.22 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.91 | 67.03 | 16.28 | | 150.0 | |
| | | Z | 5.83 | 66.76 | 16.15 | | 150.0 | |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 5.97 | 67.20 | 16.39 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 6.03 | 67.39 | 16.46 | | 150.0 | |
| | | Z | 5.93 | 67.08 | 16.31 | | 150.0 | |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 6.12 | 67.28 | 16.39 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 6.21 | 67.56 | 16.50 | | 150.0 | |
| | | Z | 6.06 | 67.12 | 16.29 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 4.77 | 66.53 | 16.22 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.85 | 66.74 | 16.33 | | 150.0 | |
| | | Z | 4.73 | 66.44 | 16.14 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 4.99 | 66.98 | 16.54 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.07 | 67.16 | 16.63 | | 150.0 | |
| | | Z | 4.95 | 66.88 | 16.46 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.83 | 66.81 | 16.35 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.91 | 67.02 | 16.45 | | 150.0 | |
| | | Z | 4.79 | 66.71 | 16.26 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.85 | 67.20 | 16.71 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.93 | 67.38 | 16.77 | | 150.0 | |
| | | Z | 4.81 | 67.08 | 16.61 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.74 | 66.58 | 16.12 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.83 | 66.83 | 16.26 | | 150.0 | |
| | | Z | 4.70 | 66.51 | 16.04 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.82 | 67.31 | 16.78 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.89 | 67.45 | 16.83 | | 150.0 | |
| | | Z | 4.77 | 67.20 | 16.69 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.85 | 67.15 | 16.71 | 0.46 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.92 | 67.31 | 16.77 | | 150.0 | |
| | | Z | 4.80 | 67.05 | 16.62 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.07 | 63.46 | 14.88 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 1.18 | 64.36 | 15.50 | | 130.0 | |
| | | Z | 1.05 | 63.26 | 14.63 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.08 | 63.96 | 15.20 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 1.19 | 64.89 | 15.83 | | 130.0 | |
| | | Z | 1.06 | 63.74 | 14.94 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 1.25 | 78.23 | 19.86 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 1.96 | 84.50 | 22.78 | | 130.0 | |
| | | Z | 1.13 | 76.27 | 18.64 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.12 | 68.84 | 17.70 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 1.27 | 70.06 | 18.45 | | 130.0 | |
| | | Z | 1.08 | 68.29 | 17.23 | | 130.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.56 | 66.33 | 16.28 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.64 | 66.55 | 16.39 | | 130.0 | |
| | | Z | 4.52 | 66.26 | 16.21 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.58 | 66.49 | 16.34 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.66 | 66.70 | 16.45 | | 130.0 | |
| | | Z | 4.55 | 66.42 | 16.27 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.78 | 66.79 | 16.51 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.86 | 66.98 | 16.62 | | 130.0 | |
| | | Z | 4.74 | 66.70 | 16.44 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.67 | 66.93 | 16.61 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.75 | 67.11 | 16.70 | | 130.0 | |
| | | Z | 4.64 | 66.84 | 16.53 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.44 | 66.18 | 15.90 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.53 | 66.47 | 16.06 | | 130.0 | |
| | | Z | 4.40 | 66.11 | 15.83 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.49 | 66.25 | 15.93 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.58 | 66.53 | 16.10 | | 130.0 | |
| | | Z | 4.45 | 66.18 | 15.87 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.57 | 66.95 | 16.55 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.65 | 67.15 | 16.64 | | 130.0 | |
| | | Z | 4.53 | 66.86 | 16.47 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.38 | 66.95 | 15.69 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.48 | 66.26 | 15.88 | | 130.0 | |
| | | Z | 4.34 | 65.89 | 15.62 | | 130.0 | |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.56 | 66.33 | 16.28 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.64 | 66.55 | 16.39 | | 130.0 | |
| | | Z | 4.52 | 66.26 | 16.21 | | 130.0 | |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.58 | 66.49 | 16.34 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.66 | 66.70 | 16.45 | | 130.0 | |
| | | Z | 4.55 | 66.42 | 16.27 | | 130.0 | |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 4.78 | 66.79 | 16.51 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.86 | 66.98 | 16.62 | | 130.0 | |
| | | Z | 4.74 | 66.70 | 16.44 | | 130.0 | |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.67 | 66.93 | 16.61 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.75 | 67.11 | 16.70 | | 130.0 | |
| | | Z | 4.64 | 66.84 | 16.53 | | 130.0 | |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.44 | 66.18 | 15.90 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.53 | 66.47 | 16.06 | | 130.0 | |
| | | Z | 4.40 | 66.11 | 15.83 | | 130.0 | |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.49 | 66.25 | 15.93 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.58 | 66.53 | 16.10 | | 130.0 | |
| | | Z | 4.45 | 66.18 | 15.87 | | 130.0 | |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 4.57 | 66.95 | 16.55 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.65 | 67.15 | 16.64 | | 130.0 | |
| | | Z | 4.53 | 66.86 | 16.47 | | 130.0 | |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.38 | 65.95 | 15.69 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.48 | 66.26 | 15.88 | | 130.0 | |
| | | Z | 4.34 | 65.89 | 15.62 | | 130.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.71 | 66.40 | 16.39 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.79 | 66.60 | 16.49 | | 130.0 | |
| | | Z | 4.68 | 66.33 | 16.32 | | 130.0 | |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.88 | 66.73 | 16.52 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.94 | 66.93 | 16.62 | | 130.0 | |
| | | Z | 4.82 | 66.66 | 16.45 | | 130.0 | |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.78 | 66.63 | 16.39 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.86 | 66.85 | 16.50 | | 130.0 | |
| | | Z | 4.74 | 66.55 | 16.32 | | 130.0 | |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.83 | 66.80 | 16.55 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.91 | 67.00 | 16.65 | | 130.0 | |
| | | Z | 4.80 | 66.72 | 16.48 | | 130.0 | |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.80 | 66.75 | 16.44 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.88 | 66.96 | 16.55 | | 130.0 | |
| | | Z | 4.76 | 66.67 | 16.38 | | 130.0 | |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.73 | 66.74 | 16.44 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.82 | 66.96 | 16.56 | | 130.0 | |
| | | Z | 4.70 | 66.66 | 16.38 | | 130.0 | |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.68 | 66.63 | 16.32 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.77 | 66.87 | 16.44 | | 130.0 | |
| | | Z | 4.65 | 66.55 | 16.25 | | 130.0 | |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.66 | 66.85 | 16.58 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.74 | 67.06 | 16.68 | | 130.0 | |
| | | Z | 4.63 | 66.76 | 16.50 | | 130.0 | |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.40 | 66.99 | 16.64 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.46 | 67.17 | 16.72 | | 130.0 | |
| | | Z | 5.37 | 66.92 | 16.59 | | 130.0 | |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.56 | 67.50 | 16.87 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.59 | 67.56 | 16.89 | | 130.0 | |
| | | Z | 5.52 | 67.44 | 16.82 | | 130.0 | |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.42 | 67.18 | 16.73 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.48 | 67.31 | 16.78 | | 130.0 | |
| | | Z | 5.39 | 67.11 | 16.68 | | 130.0 | |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.54 | 67.27 | 16.69 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.58 | 67.37 | 16.73 | | 130.0 | |
| | | Z | 5.51 | 67.23 | 16.66 | | 130.0 | |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.60 | 67.53 | 16.96 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.65 | 67.64 | 16.99 | | 130.0 | |
| | | Z | 5.58 | 67.49 | 16.92 | | 130.0 | |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.43 | 67.06 | 16.71 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.48 | 67.18 | 16.74 | | 130.0 | |
| | | Z | 5.41 | 67.03 | 16.68 | | 130.0 | |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.54 | 67.37 | 16.86 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.58 | 67.47 | 16.90 | | 130.0 | |
| | | Z | 5.51 | 67.32 | 16.82 | | 130.0 | |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.25 | 66.58 | 16.32 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.33 | 66.83 | 16.44 | | 130.0 | |
| | | Z | 5.22 | 66.51 | 16.27 | | 130.0 | |



FCC ID: A3LSMM305F

Report No: HCT-SR-1901-FC004-R1

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.55 | 65.71 | 16.00 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.63 | 65.91 | 16.11 | | 130.0 | |
| | | Z | 4.51 | 65.62 | 15.93 | | 130.0 | |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.72 | 66.10 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.81 | 66.31 | 16.27 | | 130.0 | |
| | | Z | 4.69 | 66.01 | 16.10 | | 130.0 | |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.61 | 65.93 | 16.00 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.70 | 66.17 | 16.12 | | 130.0 | |
| | | Z | 4.58 | 65.85 | 15.92 | | 130.0 | |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.66 | 66.10 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.75 | 66.31 | 16.27 | | 130.0 | |
| | | Z | 4.63 | 66.01 | 16.09 | | 130.0 | |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.58 | 65.90 | 16.01 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.66 | 66.13 | 16.12 | | 130.0 | |
| | | Z | 4.54 | 65.81 | 15.93 | | 130.0 | |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.58 | 66.05 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 66.29 | 16.18 | | 130.0 | |
| | | Z | 4.55 | 65.96 | 15.98 | | 130.0 | |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.59 | 65.92 | 15.92 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.68 | 66.17 | 16.06 | | 130.0 | |
| | | Z | 4.55 | 65.83 | 15.85 | | 130.0 | |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.53 | 66.10 | 16.15 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.62 | 66.32 | 16.26 | | 130.0 | |
| | | Z | 4.49 | 66.00 | 16.07 | | 130.0 | |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.58 | 65.73 | 15.78 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.67 | 66.00 | 15.93 | | 130.0 | |
| | | Z | 4.54 | 65.66 | 15.71 | | 130.0 | |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.21 | 66.20 | 16.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.28 | 66.39 | 16.31 | | 130.0 | |
| | | Z | 5.18 | 66.12 | 16.17 | | 130.0 | |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.29 | 66.42 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 66.57 | 16.38 | | 130.0 | |
| | | Z | 5.26 | 66.35 | 16.26 | | 130.0 | |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.17 | 66.40 | 16.32 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.23 | 66.57 | 16.38 | | 130.0 | |
| | | Z | 5.13 | 66.32 | 16.26 | | 130.0 | |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.18 | 66.20 | 16.15 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.25 | 66.39 | 16.24 | | 130.0 | |
| | | Z | 5.15 | 66.12 | 16.09 | | 130.0 | |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.27 | 66.24 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.34 | 66.43 | 16.31 | | 130.0 | |
| | | Z | 5.24 | 66.17 | 16.17 | | 130.0 | |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.27 | 66.37 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.33 | 66.53 | 16.46 | | 130.0 | |
| | | Z | 5.24 | 66.29 | 16.35 | | 130.0 | |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.29 | 66.54 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.35 | 66.70 | 16.54 | | 130.0 | |
| | | Z | 5.25 | 66.46 | 16.43 | | 130.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 5.16 | 66.06 | 16.12 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.23 | 66.26 | 16.20 | | 130.0 | |
| | | Z | 5.13 | 65.98 | 16.06 | | 130.0 | |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.35 | 66.27 | 16.29 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.42 | 66.45 | 16.36 | | 130.0 | |
| | | Z | 5.32 | 66.19 | 16.23 | | 130.0 | |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 5.70 | 67.19 | 16.80 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.76 | 67.36 | 16.87 | | 130.0 | |
| | | Z | 5.65 | 67.07 | 16.73 | | 130.0 | |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.52 | 66.27 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.57 | 66.46 | 16.27 | | 130.0 | |
| | | Z | 5.49 | 66.19 | 16.14 | | 130.0 | |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 5.77 | 66.91 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.81 | 67.01 | 16.51 | | 130.0 | |
| | | Z | 5.75 | 66.84 | 16.43 | | 130.0 | |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.54 | 66.35 | 16.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.61 | 66.56 | 16.22 | | 130.0 | |
| | | Z | 5.51 | 66.27 | 16.08 | | 130.0 | |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 5.62 | 66.41 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.68 | 66.60 | 16.24 | | 130.0 | |
| | | Z | 5.59 | 66.34 | 16.11 | | 130.0 | |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 6.09 | 68.03 | 16.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.09 | 68.04 | 16.96 | | 130.0 | |
| | | Z | 6.06 | 67.95 | 16.91 | | 130.0 | |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 5.94 | 67.68 | 16.99 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.99 | 67.81 | 17.02 | | 130.0 | |
| | | Z | 5.90 | 67.57 | 16.91 | | 130.0 | |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 5.74 | 66.96 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.77 | 67.05 | 16.65 | | 130.0 | |
| | | Z | 5.71 | 66.89 | 16.60 | | 130.0 | |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 5.60 | 66.48 | 16.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.67 | 66.71 | 16.32 | | 130.0 | |
| | | Z | 5.56 | 66.40 | 16.18 | | 130.0 | |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 5.58 | 66.52 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.65 | 66.72 | 16.38 | | 130.0 | |
| | | Z | 5.55 | 66.43 | 16.25 | | 130.0 | |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.47 | 65.85 | 15.71 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.54 | 66.13 | 15.85 | | 130.0 | |
| | | Z | 5.43 | 65.78 | 15.66 | | 130.0 | |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 5.94 | 66.65 | 16.30 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.99 | 66.83 | 16.36 | | 130.0 | |
| | | Z | 5.91 | 66.57 | 16.24 | | 130.0 | |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.11 | 67.07 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.14 | 67.20 | 16.53 | | 130.0 | |
| | | Z | 6.08 | 67.00 | 16.44 | | 130.0 | |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.10 | 67.03 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.14 | 67.18 | 16.50 | | 130.0 | |
| | | Z | 6.07 | 66.96 | 16.40 | | 130.0 | |

EX3DV4- SN:3968

September 25, 2018

| | | | | | | | | |
|-----------|--|---|--------|--------|-------|-------|-------|---------|
| 10639-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 6.07 | 66.94 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.12 | 67.13 | 16.51 | | 130.0 | |
| | | Z | 6.04 | 66.86 | 16.39 | | 130.0 | |
| 10640-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 6.07 | 66.95 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.13 | 67.15 | 16.48 | | 130.0 | |
| | | Z | 6.04 | 66.88 | 16.34 | | 130.0 | |
| 10641-AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 6.13 | 66.91 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.17 | 67.07 | 16.45 | | 130.0 | |
| | | Z | 6.11 | 66.86 | 16.36 | | 130.0 | |
| 10642-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.16 | 67.11 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.21 | 67.28 | 16.71 | | 130.0 | |
| | | Z | 6.12 | 67.04 | 16.61 | | 130.0 | |
| 10643-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 6.00 | 66.83 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.05 | 67.00 | 16.48 | | 130.0 | |
| | | Z | 5.98 | 66.76 | 16.37 | | 130.0 | |
| 10644-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.14 | 67.25 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.20 | 67.47 | 16.74 | | 130.0 | |
| | | Z | 6.10 | 67.16 | 16.59 | | 130.0 | |
| 10645-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.37 | 67.57 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.47 | 67.90 | 16.92 | | 130.0 | |
| | | Z | 6.31 | 67.40 | 16.68 | | 130.0 | |
| 10646-AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 15.25 | 107.38 | 37.28 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 82.59 | 150.95 | 50.26 | | 60.0 | |
| | | Z | 18.10 | 112.25 | 39.14 | | 60.0 | |
| 10647-AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 13.17 | 104.57 | 36.53 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 57.35 | 142.83 | 48.41 | | 60.0 | |
| | | Z | 15.41 | 109.07 | 38.31 | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 0.56 | 61.68 | 8.92 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.66 | 62.85 | 10.29 | | 150.0 | |
| | | Z | 0.51 | 60.97 | 8.15 | | 150.0 | |
| 10652-AAD | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.43 | 66.30 | 16.29 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.69 | 67.19 | 16.78 | | 80.0 | |
| | | Z | 3.42 | 66.28 | 16.22 | | 80.0 | |
| 10653-AAD | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 3.97 | 65.72 | 16.50 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.20 | 66.48 | 16.89 | | 80.0 | |
| | | Z | 3.96 | 65.72 | 16.47 | | 80.0 | |
| 10654-AAD | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 3.96 | 65.37 | 16.51 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.17 | 66.11 | 16.89 | | 80.0 | |
| | | Z | 3.96 | 65.37 | 16.48 | | 80.0 | |
| 10655-AAE | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.02 | 65.35 | 16.55 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.24 | 66.10 | 16.93 | | 80.0 | |
| | | Z | 4.02 | 65.35 | 16.53 | | 80.0 | |
| 10658-AAA | Pulse Waveform (200Hz, 10%) | X | 100.00 | 109.96 | 25.46 | 10.00 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 113.08 | 26.90 | | 60.0 | |
| | | Z | 100.00 | 110.58 | 25.80 | | 60.0 | |
| 10659-AAA | Pulse Waveform (200Hz, 20%) | X | 100.00 | 108.07 | 23.54 | 6.99 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 111.97 | 25.57 | | 60.0 | |
| | | Z | 100.00 | 108.43 | 23.77 | | 60.0 | |

EX3DV4-- SN:3968

September 25, 2018

| | | | | | | | | |
|---------------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| 10660- AAA | Pulse Waveform (200Hz, 40%) | X | 100.00 | 106.10 | 21.40 | 3.98 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 113.15 | 24.95 | | 80.0 | |
| | | Z | 100.00 | 105.59 | 21.24 | | 80.0 | |
| 10661- AAA | Pulse Waveform (200Hz, 60%) | X | 100.00 | 101.77 | 18.47 | 2.22 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 116.26 | 25.11 | | 100.0 | |
| | | Z | 100.00 | 99.43 | 17.54 | | 100.0 | |
| 10662- AAA | Pulse Waveform (200Hz, 80%) | X | 0.18 | 60.00 | 3.99 | 0.97 | 120.0 | ± 9.6 % |
| | | Y | 100.00 | 121.06 | 25.41 | | 120.0 | |
| | | Z | 0.19 | 60.00 | 3.60 | | 120.0 | |
| 10670- AAA | Bluetooth Low Energy | X | 100.00 | 109.06 | 21.78 | 2.19 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 118.52 | 26.46 | | 100.0 | |
| | | Z | 100.00 | 106.33 | 20.69 | | 100.0 | |

^a Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **HCT (Dymstec)**

Certificate No: **EX3-3863_Apr18**

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3863

Calibration procedure(s) QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
 QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes

Calibration date: April 25, 2018

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID | Cal Date (Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP | SN: 104778 | 04-Apr-18 (No. 217-02672/02673) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103244 | 04-Apr-18 (No. 217-02672) | Apr-19 |
| Power sensor NRP-Z91 | SN: 103245 | 04-Apr-18 (No. 217-02673) | Apr-19 |
| Reference 20 dB Attenuator | SN: S5277 (20x) | 04-Apr-18 (No. 217-02682) | Apr-19 |
| Reference Probe E530UV2 | SN: 3013 | 30-Dec-17 (No. ES3-3013_Dec17) | Dec-18 |
| DAE4 | SN: 660 | 21-Dec-17 (No. DAE4-660_Dec17) | Dec-18 |
| | | | |
| Secondary Standards | ID | Check Date (in house) | Scheduled Check |
| Power meter E4419B | SN: GB41293874 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: MY41498087 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A | SN: 000110210 | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C | SN: US3842U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

| Calibrated by: | Name | Function | Signature |
|----------------|-----------------|-----------------------|-----------|
| | Claudio Leutler | Laboratory Technician | |

| Approved by: | Name | Function | Signature |
|--------------|---------------|-------------------|-----------|
| | Katja Pokovic | Technical Manager | |

Issued: April 26, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3863_Apr18

Page 1 of 39

| 결재 | 담당자 | 화인자 |
|-----------------------------------|-----|----------------------------------|
| XJin 2018.05.11 SW Test Lab | Jin | Jin 2018.5.11 BJJ Test Lab |

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

| | |
|------------------------|--|
| TSL | tissue simulating liquid |
| NORM x,y,z | sensitivity in free space |
| ConvF | sensitivity in TSL / NORM x,y,z |
| DCP | diode compression point |
| CF | crest factor (1/duty_cycle) of the RF signal |
| A, B, C, D | modulation dependent linearization parameters |
| Polarization φ | φ rotation around probe axis |
| Polarization β | β rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\beta = 0$ is normal to probe axis |
| Connector Angle | information used in DASY system to align probe sensor X to the robot coordinate system |

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$: Assessed for E-field polarization $\beta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORMx,y,z$ are only intermediate values, i.e., the uncertainties of $NORMx,y,z$ does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- $DCPx,y,z$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR : PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- $Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z$: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORMx,y,z * ConvF$ whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the $NORMx$ (no uncertainty required).



FCC ID: A3LSMM305F

Report No: HCT-SR-1901-FC004-R1

EX3DV4 – SN:3863

April 25, 2018

Probe EX3DV4

SN:3863

Manufactured: February 2, 2012
Calibrated: April 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Basic Calibration Parameters

| | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|---------------|
| Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A | 0.35 | 0.34 | 0.45 | $\pm 10.1 \%$ |
| DCP (mV) ^B | 99.7 | 103.9 | 103.3 | |

Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB $\sqrt{\mu\text{V}}$ | C | D dB | VR mV | Unc ^E (k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0 | CW | X | 0.0 | 0.0 | 1.0 | 0.00 | 151.1 | $\pm 3.5 \%$ |
| | | Y | 0.0 | 0.0 | 1.0 | | 153.4 | |
| | | Z | 0.0 | 0.0 | 1.0 | | 149.6 | |

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

| | C1 ff | C2 ff | a V^{-1} | T1 ms.V^{-2} | T2 ms.V^{-1} | T3 ms | T4 V^{-2} | T5 V^{-1} | T6 |
|---|----------|----------|----------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|-------|
| X | 35.70 | 266.3 | 35.57 | 18.74 | 0.500 | 5.000 | 0.445 | 0.515 | 1.000 |
| Y | 23.67 | 174.6 | 34.99 | 6.322 | 0.441 | 5.000 | 1.481 | 0.043 | 1.003 |
| Z | 41.62 | 317.3 | 36.81 | 8.754 | 0.711 | 5.047 | 0.519 | 0.469 | 1.008 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) ^F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 150 | 52.3 | 0.76 | 12.22 | 12.22 | 12.22 | 0.00 | 1.00 | ± 13.3 % |
| 450 | 43.5 | 0.87 | 10.92 | 10.92 | 10.92 | 0.14 | 1.20 | ± 13.3 % |
| 750 | 41.9 | 0.89 | 10.20 | 10.20 | 10.20 | 0.61 | 0.80 | ± 12.0 % |
| 835 | 41.5 | 0.90 | 9.95 | 9.95 | 9.95 | 0.50 | 0.80 | ± 12.0 % |
| 900 | 41.5 | 0.97 | 9.67 | 9.67 | 9.67 | 0.32 | 1.07 | ± 12.0 % |
| 1450 | 40.5 | 1.20 | 8.78 | 8.78 | 8.78 | 0.34 | 0.80 | ± 12.0 % |
| 1750 | 40.1 | 1.37 | 8.45 | 8.45 | 8.45 | 0.42 | 0.80 | ± 12.0 % |
| 1900 | 40.0 | 1.40 | 8.19 | 8.19 | 8.19 | 0.36 | 0.80 | ± 12.0 % |
| 2300 | 39.5 | 1.67 | 7.77 | 7.77 | 7.77 | 0.34 | 0.86 | ± 12.0 % |
| 2450 | 39.2 | 1.80 | 7.62 | 7.62 | 7.62 | 0.36 | 0.85 | ± 12.0 % |
| 2600 | 39.0 | 1.96 | 7.19 | 7.19 | 7.19 | 0.36 | 0.93 | ± 12.0 % |
| 5250 | 35.9 | 4.71 | 5.04 | 5.04 | 5.04 | 0.40 | 1.80 | ± 13.1 % |
| 5600 | 35.5 | 5.07 | 4.68 | 4.68 | 4.68 | 0.40 | 1.80 | ± 13.1 % |
| 5750 | 35.4 | 5.22 | 5.08 | 5.08 | 5.08 | 0.40 | 1.80 | ± 13.1 % |

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and α) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and α) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^c | Relative Permittivity ^r | Conductivity (S/m) ^r | ConvF X | ConvF Y | ConvF Z | Alpha ^d | Depth ^e (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 150 | 61.9 | 0.80 | 11.86 | 11.86 | 11.86 | 0.00 | 1.00 | ± 13.3 % |
| 450 | 56.7 | 0.94 | 10.78 | 10.78 | 10.78 | 0.08 | 1.20 | ± 13.3 % |
| 750 | 55.5 | 0.96 | 10.02 | 10.02 | 10.02 | 0.37 | 0.89 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 9.66 | 9.66 | 9.66 | 0.42 | 0.91 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 8.18 | 8.18 | 8.18 | 0.40 | 0.80 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 7.84 | 7.84 | 7.84 | 0.34 | 0.80 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 7.68 | 7.68 | 7.68 | 0.29 | 0.90 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 7.48 | 7.48 | 7.48 | 0.27 | 0.97 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 7.27 | 7.27 | 7.27 | 0.17 | 1.05 | ± 12.0 % |
| 5250 | 48.9 | 5.36 | 4.41 | 4.41 | 4.41 | 0.50 | 1.90 | ± 13.1 % |
| 5600 | 48.5 | 5.77 | 3.88 | 3.88 | 3.88 | 0.50 | 1.90 | ± 13.1 % |
| 5750 | 48.3 | 5.94 | 4.21 | 4.21 | 4.21 | 0.50 | 1.90 | ± 13.1 % |

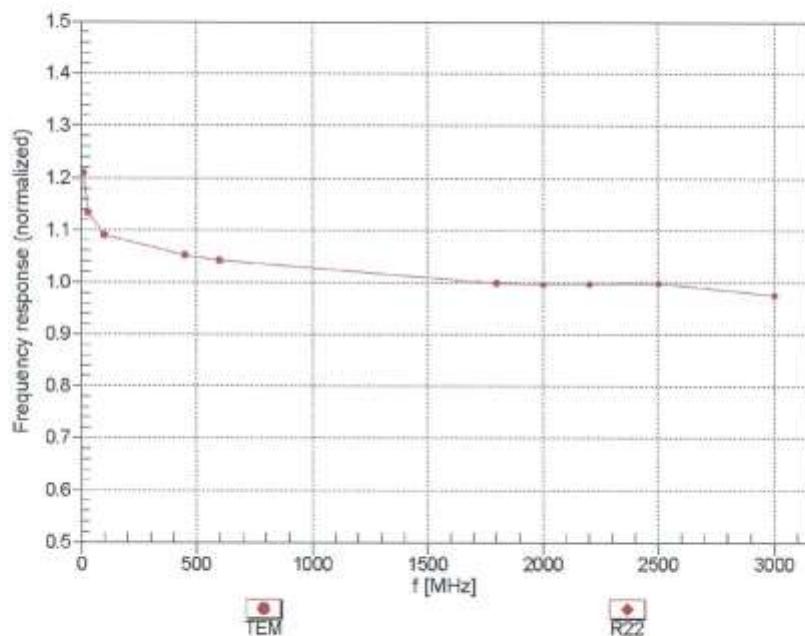
^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^r At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^d Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3863

April 25, 2018

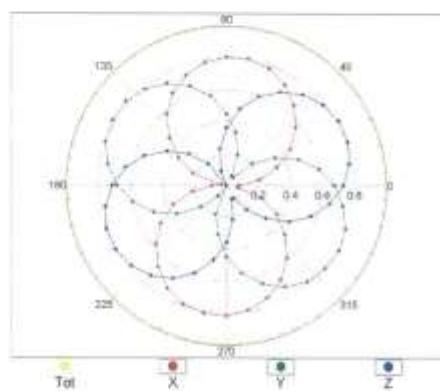
Frequency Response of E-Field
(TEM-Cell:ifi110 EXX, Waveguide: R22)Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4- SN:3863

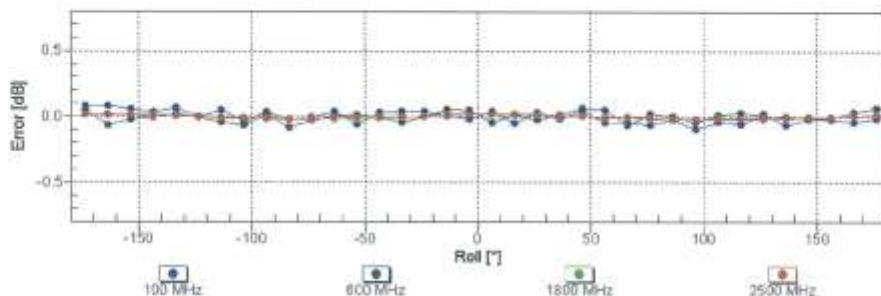
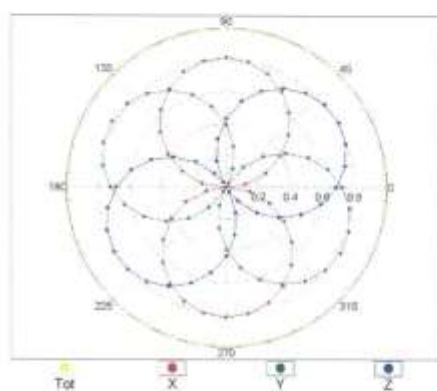
April 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

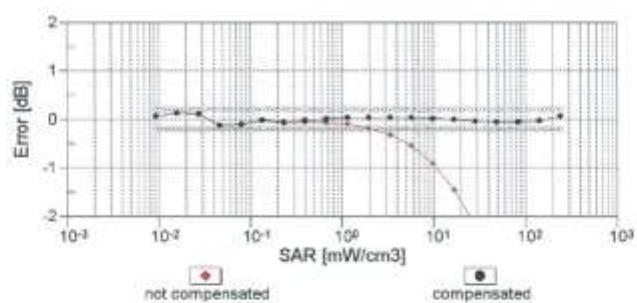
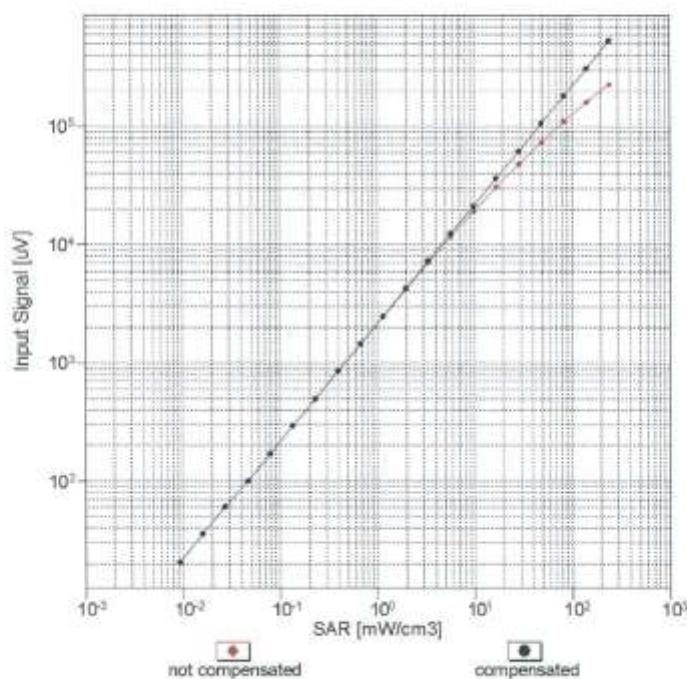


f=1800 MHz,R22

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

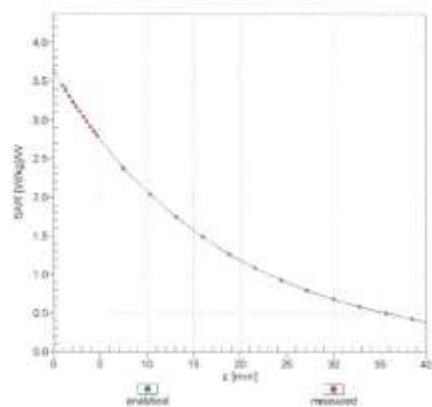
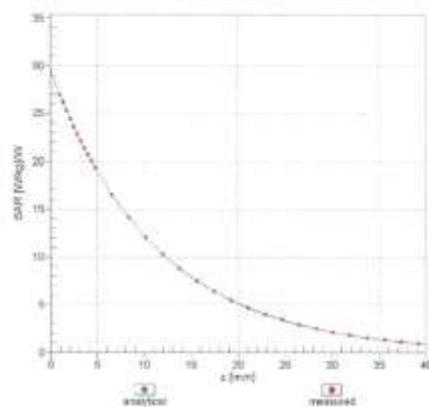
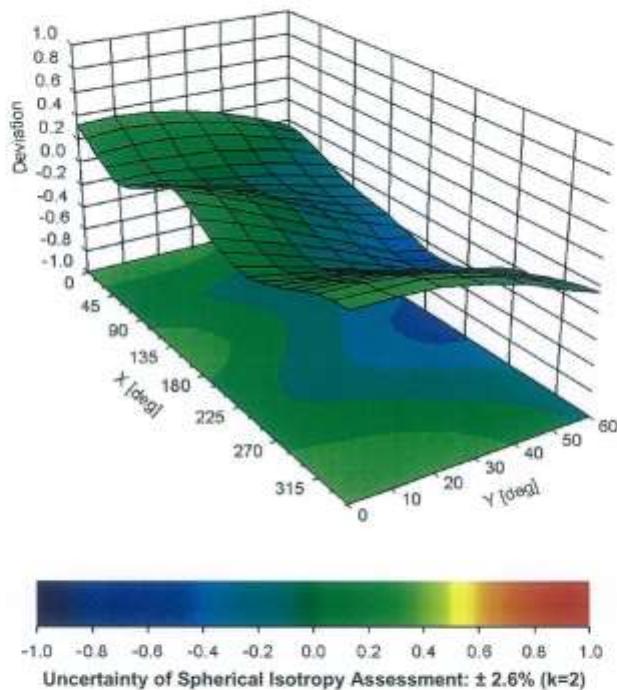
EX3DV4– SN:3863

April 25, 2018

Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

EX3DV4- SN:3863

April 25, 2018

Conversion Factor Assessment $f = 835 \text{ MHz}, \text{WGLS R9 (H_convF)}$  $f = 1900 \text{ MHz}, \text{WGLS R22 (H_convF)}$ **Deviation from Isotropy in Liquid**Error (ϕ, θ), $f = 900 \text{ MHz}$ 

EX3DV4- SN:3863

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3863**Other Probe Parameters**

| | |
|---|------------|
| Sensor Arrangement | Triangular |
| Connector Angle ("") | 106.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 9 mm |
| Tip Diameter | 2.5 mm |
| Probe Tip to Sensor X Calibration Point | 1 mm |
| Probe Tip to Sensor Y Calibration Point | 1 mm |
| Probe Tip to Sensor Z Calibration Point | 1 mm |
| Recommended Measurement Distance from Surface | 1.4 mm |

EX3DV4- SN:3863

April 25, 2018

Appendix: Modulation Calibration Parameters

| UID | Communication System Name | | A dB | B dB·µV | C | D dB | VR mV | Max Unc ^E (k=2) |
|-----------|---|---|---------|------------|-------|---------|----------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 151.1 | ± 3.5 % |
| | | Y | 0.00 | 0.00 | 1.00 | | 153.4 | |
| | | Z | 0.00 | 0.00 | 1.00 | | 149.8 | |
| 10010-CAA | SAR Validation (Square, 100ms, 10ms) | X | 11.00 | 70.00 | 30.00 | 10.00 | 20.0 | ± 9.6 % |
| | | Y | 1.74 | 62.86 | 8.09 | | 20.0 | |
| | | Z | 2.07 | 64.28 | 9.36 | | 20.0 | |
| 10011-CAB | UMTS-FDD (WCDMA) | X | 0.92 | 66.96 | 14.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.23 | 73.72 | 17.72 | | 150.0 | |
| | | Z | 0.82 | 64.81 | 13.15 | | 150.0 | |
| 10012-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | X | 1.13 | 63.96 | 15.00 | 0.41 | 150.0 | ± 9.6 % |
| | | Y | 1.12 | 65.21 | 15.97 | | 150.0 | |
| | | Z | 1.04 | 62.64 | 14.13 | | 150.0 | |
| 10013-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.66 | 66.70 | 16.87 | 1.46 | 150.0 | ± 9.6 % |
| | | Y | 4.41 | 67.26 | 17.07 | | 150.0 | |
| | | Z | 4.70 | 66.40 | 16.80 | | 150.0 | |
| 10021-DAC | GSM-FDD (TDMA, GMSK) | X | 9.09 | 79.88 | 16.40 | 9.39 | 50.0 | ± 9.6 % |
| | | Y | 45.23 | 97.58 | 21.17 | | 50.0 | |
| | | Z | 100.00 | 110.54 | 25.67 | | 50.0 | |
| 10023-DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 6.78 | 76.49 | 15.24 | 9.57 | 50.0 | ± 9.6 % |
| | | Y | 9.44 | 80.59 | 16.39 | | 50.0 | |
| | | Z | 67.36 | 105.58 | 24.50 | | 50.0 | |
| 10024-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 11.10 | 81.86 | 15.87 | 6.56 | 60.0 | ± 9.6 % |
| | | Y | 100.00 | 103.67 | 20.95 | | 60.0 | |
| | | Z | 100.00 | 108.28 | 23.45 | | 60.0 | |
| 10025-DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | X | 3.31 | 63.37 | 21.37 | 12.57 | 50.0 | ± 9.6 % |
| | | Y | 4.23 | 71.81 | 26.71 | | 50.0 | |
| | | Z | 3.77 | 66.74 | 23.69 | | 50.0 | |
| 10026-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 9.84 | 92.28 | 31.76 | 9.56 | 60.0 | ± 9.6 % |
| | | Y | 5.95 | 83.99 | 29.74 | | 60.0 | |
| | | Z | 7.19 | 86.26 | 30.24 | | 60.0 | |
| 10027-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | X | 100.00 | 101.03 | 19.83 | 4.80 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 103.59 | 20.13 | | 80.0 | |
| | | Z | 100.00 | 106.91 | 22.02 | | 80.0 | |
| 10028-DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 100.43 | 19.05 | 3.55 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 104.67 | 19.92 | | 100.0 | |
| | | Z | 100.00 | 105.33 | 20.65 | | 100.0 | |
| 10029-DAC | EDGE-FDD (TDMA, BPSK, TN 0-1-2) | X | 6.41 | 82.79 | 27.10 | 7.80 | 80.0 | ± 9.6 % |
| | | Y | 4.05 | 75.66 | 25.13 | | 80.0 | |
| | | Z | 4.75 | 77.36 | 25.50 | | 80.0 | |
| 10030-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 5.26 | 74.89 | 13.09 | 5.30 | 70.0 | ± 9.6 % |
| | | Y | 100.00 | 100.23 | 18.93 | | 70.0 | |
| | | Z | 100.00 | 105.72 | 21.80 | | 70.0 | |
| 10031-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 4.88 | 76.31 | 11.58 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 0.28 | 61.23 | 5.16 | | 100.0 | |
| | | Z | 0.39 | 62.06 | 6.02 | | 100.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|-------|-------|-------------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5) | X | 99.99 | 93.80 | 14.65 | 1.17 | 100.0 | $\pm 9.6\%$ |
| | | Y | 0.14 | 60.00 | 3.64 | | 100.0 | |
| | | Z | 0.18 | 60.00 | 3.83 | | 100.0 | |
| 10033-CAA | IEEE 802.15.1 Bluetooth (Pi/4-DQPSK, DH1) | X | 6.63 | 80.89 | 18.62 | 5.30 | 70.0 | $\pm 9.6\%$ |
| | | Y | 3.59 | 74.26 | 15.11 | | 70.0 | |
| | | Z | 6.50 | 84.64 | 21.35 | | 70.0 | |
| 10034-CAA | IEEE 802.15.1 Bluetooth (Pi/4-DQPSK, DH3) | X | 2.35 | 71.30 | 13.76 | 1.88 | 100.0 | $\pm 9.6\%$ |
| | | Y | 0.91 | 63.27 | 8.38 | | 100.0 | |
| | | Z | 1.79 | 70.18 | 14.28 | | 100.0 | |
| 10035-CAA | IEEE 802.15.1 Bluetooth (Pi/4-DQPSK, DH5) | X | 1.70 | 69.13 | 12.72 | 1.17 | 100.0 | $\pm 9.6\%$ |
| | | Y | 0.67 | 61.91 | 7.34 | | 100.0 | |
| | | Z | 1.29 | 67.25 | 12.66 | | 100.0 | |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | X | 8.29 | 83.97 | 19.70 | 5.30 | 70.0 | $\pm 9.6\%$ |
| | | Y | 4.28 | 76.54 | 16.01 | | 70.0 | |
| | | Z | 8.57 | 88.94 | 22.82 | | 70.0 | |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 2.17 | 70.51 | 13.42 | 1.88 | 100.0 | $\pm 9.6\%$ |
| | | Y | 0.85 | 62.76 | 8.13 | | 100.0 | |
| | | Z | 1.68 | 69.54 | 13.98 | | 100.0 | |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 1.73 | 69.53 | 13.00 | 1.17 | 100.0 | $\pm 9.6\%$ |
| | | Y | 0.68 | 62.14 | 7.59 | | 100.0 | |
| | | Z | 1.29 | 67.51 | 12.89 | | 100.0 | |
| 10039-CAB | CDMA2000 (1xRTT, RC1) | X | 1.20 | 68.00 | 12.32 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.40 | 60.00 | 5.73 | | 150.0 | |
| | | Z | 1.08 | 65.78 | 11.49 | | 150.0 | |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, Pi/4-DQPSK, Halfrate) | X | 3.96 | 71.13 | 12.28 | 7.78 | 50.0 | $\pm 9.6\%$ |
| | | Y | 4.33 | 73.40 | 12.83 | | 50.0 | |
| | | Z | 20.63 | 89.92 | 18.62 | | 50.0 | |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM) | X | 0.03 | 118.44 | 11.49 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.03 | 123.41 | 0.47 | | 150.0 | |
| | | Z | 0.10 | 121.86 | 6.25 | | 150.0 | |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | X | 4.53 | 70.04 | 14.07 | 13.80 | 25.0 | $\pm 9.6\%$ |
| | | Y | 4.85 | 69.08 | 13.50 | | 25.0 | |
| | | Z | 9.31 | 78.44 | 18.09 | | 25.0 | |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 5.00 | 72.36 | 13.87 | 10.79 | 40.0 | $\pm 9.6\%$ |
| | | Y | 4.95 | 72.19 | 13.60 | | 40.0 | |
| | | Z | 10.49 | 82.35 | 18.31 | | 40.0 | |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 9.88 | 83.19 | 19.98 | 9.03 | 50.0 | $\pm 9.6\%$ |
| | | Y | 7.80 | 79.96 | 18.01 | | 50.0 | |
| | | Z | 13.55 | 90.17 | 23.36 | | 50.0 | |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 4.96 | 77.96 | 24.46 | 6.55 | 100.0 | $\pm 9.6\%$ |
| | | Y | 3.33 | 72.13 | 22.83 | | 100.0 | |
| | | Z | 3.78 | 73.24 | 22.95 | | 100.0 | |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.19 | 65.20 | 15.58 | 0.61 | 110.0 | $\pm 9.6\%$ |
| | | Y | 1.14 | 66.22 | 16.48 | | 110.0 | |
| | | Z | 1.06 | 63.47 | 14.60 | | 110.0 | |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 18.28 | 106.21 | 26.40 | 1.30 | 110.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 142.43 | 36.78 | | 110.0 | |
| | | Z | 2.88 | 84.70 | 20.89 | | 110.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 3.45 | 81.46 | 21.39 | 2.04 | 110.0 | $\pm 9.6\%$ |
| | | Y | 2.51 | 81.17 | 22.36 | | 110.0 | |
| | | Z | 1.97 | 74.69 | 19.49 | | 110.0 | |
| 10062-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | X | 4.45 | 66.88 | 16.34 | 0.49 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.22 | 67.27 | 16.54 | | 100.0 | |
| | | Z | 4.49 | 66.34 | 16.21 | | 100.0 | |
| 10063-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | X | 4.47 | 66.76 | 16.42 | 0.72 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.23 | 67.37 | 16.64 | | 100.0 | |
| | | Z | 4.51 | 66.43 | 16.31 | | 100.0 | |
| 10064-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps) | X | 4.71 | 66.95 | 16.61 | 0.86 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.42 | 67.49 | 16.78 | | 100.0 | |
| | | Z | 4.77 | 66.69 | 16.54 | | 100.0 | |
| 10065-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | X | 4.59 | 66.82 | 16.68 | 1.21 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.30 | 67.26 | 16.81 | | 100.0 | |
| | | Z | 4.65 | 66.56 | 16.62 | | 100.0 | |
| 10066-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 4.60 | 66.82 | 16.82 | 1.46 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.29 | 67.17 | 16.89 | | 100.0 | |
| | | Z | 4.66 | 66.58 | 16.78 | | 100.0 | |
| 10067-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | X | 4.89 | 67.08 | 17.27 | 2.04 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.52 | 67.29 | 17.26 | | 100.0 | |
| | | Z | 4.96 | 66.83 | 17.27 | | 100.0 | |
| 10068-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 4.93 | 67.01 | 17.42 | 2.55 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.61 | 67.41 | 17.54 | | 100.0 | |
| | | Z | 5.00 | 66.81 | 17.45 | | 100.0 | |
| 10069-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 4.99 | 67.04 | 17.61 | 2.67 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.63 | 67.31 | 17.64 | | 100.0 | |
| | | Z | 5.07 | 66.84 | 17.65 | | 100.0 | |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 4.76 | 66.78 | 17.15 | 1.99 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.51 | 67.31 | 17.34 | | 100.0 | |
| | | Z | 4.79 | 66.48 | 17.11 | | 100.0 | |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 4.72 | 67.04 | 17.33 | 2.30 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.43 | 67.41 | 17.48 | | 100.0 | |
| | | Z | 4.76 | 66.75 | 17.30 | | 100.0 | |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 4.80 | 67.25 | 17.65 | 2.83 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.51 | 67.66 | 17.82 | | 100.0 | |
| | | Z | 4.82 | 66.92 | 17.62 | | 100.0 | |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 4.81 | 67.22 | 17.80 | 3.30 | 100.0 | $\pm 9.6\%$ |
| | | Y | 4.56 | 67.77 | 18.04 | | 100.0 | |
| | | Z | 4.81 | 66.83 | 17.77 | | 100.0 | |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 4.84 | 67.27 | 18.05 | 3.82 | 90.0 | $\pm 9.6\%$ |
| | | Y | 4.60 | 67.82 | 18.29 | | 90.0 | |
| | | Z | 4.85 | 66.90 | 18.05 | | 90.0 | |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 4.88 | 67.18 | 18.22 | 4.15 | 90.0 | $\pm 9.6\%$ |
| | | Y | 4.64 | 67.67 | 18.44 | | 90.0 | |
| | | Z | 4.88 | 66.75 | 18.20 | | 90.0 | |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 4.92 | 67.26 | 18.33 | 4.30 | 90.0 | $\pm 9.6\%$ |
| | | Y | 4.68 | 67.80 | 18.58 | | 90.0 | |
| | | Z | 4.90 | 66.83 | 18.30 | | 90.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|-------------|
| 10081-CAB | CDMA2000 (1xRTT, RC3) | X | 0.57 | 63.24 | 9.45 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.29 | 60.00 | 5.08 | | 150.0 | |
| | | Z | 0.55 | 61.98 | 8.86 | | 150.0 | |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 0.85 | 60.00 | 4.39 | 4.77 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.61 | 60.00 | 3.29 | | 80.0 | |
| | | Z | 0.85 | 61.10 | 4.43 | | 80.0 | |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | X | 11.01 | 81.80 | 15.86 | 6.56 | 60.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 103.71 | 20.98 | | 60.0 | |
| | | Z | 100.00 | 108.37 | 23.51 | | 60.0 | |
| 10097-CAB | UMTS-FDD (HSDPA) | X | 1.75 | 68.14 | 15.41 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.15 | 73.36 | 17.10 | | 150.0 | |
| | | Z | 1.61 | 66.21 | 14.35 | | 150.0 | |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.71 | 68.07 | 15.37 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.11 | 73.35 | 17.12 | | 150.0 | |
| | | Z | 1.57 | 66.13 | 14.31 | | 150.0 | |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 9.91 | 92.40 | 31.80 | 9.56 | 60.0 | $\pm 9.6\%$ |
| | | Y | 8.00 | 84.12 | 29.79 | | 60.0 | |
| | | Z | 7.24 | 86.38 | 30.27 | | 60.0 | |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 2.91 | 69.93 | 16.52 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.94 | 71.66 | 17.64 | | 150.0 | |
| | | Z | 2.79 | 68.74 | 15.72 | | 150.0 | |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.05 | 67.27 | 15.75 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.96 | 68.14 | 16.32 | | 150.0 | |
| | | Z | 3.02 | 66.65 | 15.31 | | 150.0 | |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.16 | 67.31 | 15.88 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.06 | 68.19 | 16.41 | | 150.0 | |
| | | Z | 3.13 | 66.69 | 15.44 | | 150.0 | |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 6.17 | 75.27 | 19.83 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.02 | 74.56 | 20.07 | | 65.0 | |
| | | Z | 5.58 | 74.23 | 19.78 | | 65.0 | |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 6.38 | 74.05 | 20.09 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.96 | 71.85 | 19.45 | | 65.0 | |
| | | Z | 5.51 | 71.89 | 19.54 | | 65.0 | |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 5.67 | 71.78 | 19.42 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.68 | 70.50 | 19.12 | | 65.0 | |
| | | Z | 5.40 | 71.34 | 19.60 | | 65.0 | |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 2.50 | 69.27 | 16.35 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.53 | 71.57 | 17.63 | | 150.0 | |
| | | Z | 2.41 | 68.02 | 15.51 | | 150.0 | |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 2.70 | 67.24 | 15.61 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.63 | 68.68 | 16.24 | | 150.0 | |
| | | Z | 2.66 | 66.45 | 15.11 | | 150.0 | |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 1.99 | 68.44 | 15.79 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.06 | 71.55 | 17.06 | | 150.0 | |
| | | Z | 1.92 | 67.04 | 14.92 | | 150.0 | |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.45 | 68.57 | 15.90 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.57 | 71.53 | 16.67 | | 150.0 | |
| | | Z | 2.35 | 67.12 | 15.16 | | 150.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 1D112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 2.83 | 67.33 | 15.71 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.76 | 68.82 | 16.33 | | 150.0 | |
| | | Z | 2.79 | 66.53 | 15.22 | | 150.0 | |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 2.60 | 68.79 | 16.07 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.70 | 71.55 | 16.71 | | 150.0 | |
| | | Z | 2.50 | 67.36 | 15.35 | | 150.0 | |
| 10114-CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 4.91 | 67.08 | 16.35 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.70 | 67.41 | 16.61 | | 150.0 | |
| | | Z | 4.96 | 66.85 | 16.19 | | 150.0 | |
| 10115-CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | X | 5.16 | 67.16 | 16.39 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.93 | 67.53 | 16.63 | | 150.0 | |
| | | Z | 5.21 | 68.93 | 16.24 | | 150.0 | |
| 10116-CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.00 | 67.28 | 16.38 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.76 | 67.61 | 16.63 | | 150.0 | |
| | | Z | 5.04 | 67.03 | 16.21 | | 150.0 | |
| 10117-CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | X | 4.91 | 67.04 | 16.35 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.68 | 67.32 | 16.58 | | 150.0 | |
| | | Z | 4.93 | 66.73 | 16.15 | | 150.0 | |
| 10118-CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | X | 5.23 | 67.34 | 16.49 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.94 | 67.52 | 16.63 | | 150.0 | |
| | | Z | 5.30 | 67.14 | 16.35 | | 150.0 | |
| 10119-CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | X | 4.99 | 67.27 | 16.39 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.77 | 67.61 | 16.64 | | 150.0 | |
| | | Z | 5.03 | 67.00 | 16.20 | | 150.0 | |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 3.18 | 67.31 | 15.78 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.06 | 68.22 | 16.30 | | 150.0 | |
| | | Z | 3.16 | 66.70 | 15.36 | | 150.0 | |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 3.31 | 67.51 | 16.00 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.20 | 68.53 | 16.55 | | 150.0 | |
| | | Z | 3.29 | 66.86 | 15.57 | | 150.0 | |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 1.75 | 68.36 | 15.09 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.78 | 71.06 | 15.42 | | 150.0 | |
| | | Z | 1.66 | 66.67 | 14.20 | | 150.0 | |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 2.25 | 68.96 | 15.03 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.94 | 68.81 | 13.51 | | 150.0 | |
| | | Z | 2.12 | 67.21 | 14.32 | | 150.0 | |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 1.90 | 65.74 | 12.89 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.39 | 63.90 | 10.43 | | 150.0 | |
| | | Z | 1.92 | 65.05 | 12.71 | | 150.0 | |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 0.74 | 61.13 | 7.80 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.44 | 60.00 | 4.49 | | 150.0 | |
| | | Z | 0.83 | 61.47 | 8.46 | | 150.0 | |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 0.98 | 60.10 | 6.33 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.63 | 60.00 | 3.77 | | 150.0 | |
| | | Z | 1.32 | 62.30 | 8.56 | | 150.0 | |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 1.02 | 60.37 | 6.56 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.63 | 60.00 | 3.82 | | 150.0 | |
| | | Z | 1.41 | 62.99 | 9.03 | | 150.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 2.71 | 67.32 | 15.67 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.64 | 68.79 | 16.31 | | 150.0 | |
| | | Z | 2.67 | 66.51 | 15.16 | | 150.0 | |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 2.84 | 67.40 | 15.76 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.77 | 68.91 | 16.39 | | 150.0 | |
| | | Z | 2.80 | 66.59 | 15.26 | | 150.0 | |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 7.05 | 79.01 | 21.24 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.45 | 78.07 | 21.33 | | 65.0 | |
| | | Z | 5.61 | 76.01 | 20.56 | | 65.0 | |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | X | 5.87 | 73.88 | 19.52 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.45 | 71.66 | 18.62 | | 65.0 | |
| | | Z | 5.02 | 71.71 | 19.09 | | 65.0 | |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 6.39 | 75.31 | 20.54 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.89 | 73.20 | 19.71 | | 65.0 | |
| | | Z | 5.39 | 72.79 | 19.96 | | 65.0 | |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.04 | 68.90 | 16.07 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.13 | 72.17 | 17.39 | | 150.0 | |
| | | Z | 1.95 | 67.39 | 15.15 | | 150.0 | |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.46 | 68.61 | 15.94 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.59 | 71.66 | 16.74 | | 150.0 | |
| | | Z | 2.35 | 67.14 | 15.18 | | 150.0 | |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 1.56 | 68.06 | 14.48 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.39 | 68.73 | 13.43 | | 150.0 | |
| | | Z | 1.48 | 66.30 | 13.62 | | 150.0 | |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 1.70 | 65.86 | 12.52 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.07 | 62.55 | 8.97 | | 150.0 | |
| | | Z | 1.71 | 65.08 | 12.35 | | 150.0 | |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 2.62 | 68.90 | 16.14 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.73 | 71.76 | 16.82 | | 150.0 | |
| | | Z | 2.51 | 67.43 | 15.40 | | 150.0 | |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 1.78 | 66.23 | 12.74 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.10 | 62.56 | 8.97 | | 150.0 | |
| | | Z | 1.78 | 65.42 | 12.58 | | 150.0 | |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 2.55 | 68.64 | 16.16 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.51 | 70.60 | 17.09 | | 150.0 | |
| | | Z | 2.49 | 67.55 | 15.47 | | 150.0 | |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 2.73 | 67.38 | 15.64 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.66 | 68.98 | 16.16 | | 150.0 | |
| | | Z | 2.69 | 66.51 | 15.14 | | 150.0 | |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 2.84 | 67.62 | 15.79 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.77 | 69.32 | 16.34 | | 150.0 | |
| | | Z | 2.80 | 66.72 | 15.29 | | 150.0 | |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 3.17 | 68.43 | 18.19 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.74 | 68.67 | 18.97 | | 150.0 | |
| | | Z | 3.37 | 69.16 | 18.82 | | 150.0 | |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 3.80 | 70.92 | 18.39 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.27 | 72.46 | 19.76 | | 150.0 | |
| | | Z | 4.11 | 71.94 | 19.16 | | 150.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 4.33 | 73.72 | 20.04 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.93 | 76.52 | 22.01 | | 150.0 | |
| | | Z | 4.68 | 74.75 | 20.78 | | 150.0 | |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 2.69 | 67.32 | 17.58 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.43 | 68.05 | 18.61 | | 150.0 | |
| | | Z | 2.79 | 68.16 | 18.34 | | 150.0 | |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 3.59 | 72.54 | 19.67 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.51 | 76.45 | 22.16 | | 150.0 | |
| | | Z | 3.83 | 74.10 | 20.71 | | 150.0 | |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 2.93 | 68.40 | 16.78 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 70.44 | 18.33 | | 150.0 | |
| | | Z | 3.08 | 69.59 | 17.69 | | 150.0 | |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 4.62 | 78.65 | 22.60 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 2.94 | 76.24 | 23.12 | | 65.0 | |
| | | Z | 6.04 | 85.62 | 26.43 | | 65.0 | |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 7.73 | 84.08 | 22.65 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.63 | 89.25 | 25.64 | | 65.0 | |
| | | Z | 9.82 | 91.06 | 26.34 | | 65.0 | |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM) | X | 3.91 | 73.33 | 18.34 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.35 | 84.73 | 23.41 | | 65.0 | |
| | | Z | 6.55 | 83.31 | 23.20 | | 65.0 | |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 2.66 | 67.02 | 17.32 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.39 | 67.72 | 18.33 | | 150.0 | |
| | | Z | 2.76 | 67.84 | 18.07 | | 150.0 | |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 3.60 | 72.56 | 19.68 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.51 | 76.48 | 22.17 | | 150.0 | |
| | | Z | 3.84 | 74.12 | 20.72 | | 150.0 | |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 2.67 | 67.15 | 17.41 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.41 | 67.82 | 18.40 | | 150.0 | |
| | | Z | 2.78 | 67.99 | 18.17 | | 150.0 | |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 3.57 | 72.39 | 19.58 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.49 | 76.32 | 22.09 | | 150.0 | |
| | | Z | 3.80 | 73.91 | 20.61 | | 150.0 | |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 3.21 | 70.22 | 18.03 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.01 | 73.21 | 20.07 | | 150.0 | |
| | | Z | 3.41 | 71.63 | 19.02 | | 150.0 | |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 2.92 | 68.36 | 16.75 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 70.42 | 18.31 | | 150.0 | |
| | | Z | 3.08 | 69.53 | 17.64 | | 150.0 | |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 2.67 | 67.13 | 17.40 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.40 | 67.81 | 18.39 | | 150.0 | |
| | | Z | 2.78 | 67.97 | 18.16 | | 150.0 | |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 3.57 | 72.37 | 19.57 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 3.48 | 76.29 | 22.07 | | 150.0 | |
| | | Z | 3.79 | 73.88 | 20.60 | | 150.0 | |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 2.92 | 68.34 | 16.74 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 70.39 | 18.30 | | 150.0 | |
| | | Z | 3.07 | 69.51 | 17.63 | | 150.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 2.68 | 67.17 | 17.42 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.41 | 67.84 | 18.41 | | 150.0 | |
| | | Z | 2.79 | 68.01 | 18.18 | | 150.0 | |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 3.58 | 72.44 | 19.61 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.50 | 76.39 | 22.12 | | 150.0 | |
| | | Z | 3.81 | 73.96 | 20.64 | | 150.0 | |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 2.93 | 68.39 | 18.77 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.64 | 70.46 | 18.34 | | 150.0 | |
| | | Z | 3.09 | 69.57 | 17.67 | | 150.0 | |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz; QPSK) | X | 2.69 | 67.25 | 17.51 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.43 | 67.98 | 18.53 | | 150.0 | |
| | | Z | 2.80 | 68.08 | 18.26 | | 150.0 | |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 3.69 | 73.08 | 19.99 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.64 | 77.24 | 22.59 | | 150.0 | |
| | | Z | 3.94 | 74.67 | 21.05 | | 150.0 | |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 2.99 | 68.75 | 17.02 | 3.01 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.71 | 70.95 | 18.66 | | 150.0 | |
| | | Z | 3.15 | 69.99 | 17.95 | | 150.0 | |
| 10193-CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | X | 4.32 | 66.74 | 16.06 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.14 | 67.59 | 16.37 | | 150.0 | |
| | | Z | 4.34 | 66.29 | 15.83 | | 150.0 | |
| 10194-CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.46 | 66.98 | 16.19 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.24 | 67.67 | 16.48 | | 150.0 | |
| | | Z | 4.50 | 66.57 | 15.96 | | 150.0 | |
| 10195-CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.50 | 66.99 | 16.21 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.25 | 67.61 | 16.46 | | 150.0 | |
| | | Z | 4.54 | 66.61 | 15.99 | | 150.0 | |
| 10196-CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | X | 4.31 | 66.74 | 16.05 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.11 | 67.51 | 16.32 | | 150.0 | |
| | | Z | 4.34 | 66.32 | 15.83 | | 150.0 | |
| 10197-CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | X | 4.47 | 66.98 | 16.20 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.24 | 67.66 | 16.48 | | 150.0 | |
| | | Z | 4.51 | 66.59 | 15.97 | | 150.0 | |
| 10198-CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 4.49 | 66.99 | 16.21 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.24 | 67.60 | 16.45 | | 150.0 | |
| | | Z | 4.53 | 66.62 | 15.99 | | 150.0 | |
| 10219-CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | X | 4.26 | 66.77 | 16.02 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.07 | 67.62 | 16.34 | | 150.0 | |
| | | Z | 4.28 | 66.34 | 15.79 | | 150.0 | |
| 10220-CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | X | 4.47 | 66.94 | 16.18 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.23 | 67.62 | 16.46 | | 150.0 | |
| | | Z | 4.50 | 66.55 | 15.96 | | 150.0 | |
| 10221-CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | X | 4.51 | 66.94 | 16.20 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.26 | 67.58 | 16.45 | | 150.0 | |
| | | Z | 4.55 | 66.56 | 15.98 | | 150.0 | |
| 10222-CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 4.88 | 67.02 | 16.33 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.67 | 67.32 | 16.57 | | 150.0 | |
| | | Z | 4.90 | 66.72 | 16.13 | | 150.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|-------|-------|-------|------|-------|---------|
| 10223-CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.15 | 67.21 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 67.37 | 16.57 | | 150.0 | |
| | | Z | 5.20 | 66.97 | 16.28 | | 150.0 | |
| 10224-CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 4.92 | 67.13 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.70 | 67.49 | 16.58 | | 150.0 | |
| | | Z | 4.94 | 66.83 | 16.11 | | 150.0 | |
| 10225-CAB | UMTS-FDD (HSPA+) | X | 2.60 | 66.16 | 14.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.41 | 67.00 | 14.35 | | 150.0 | |
| | | Z | 2.59 | 65.42 | 14.54 | | 150.0 | |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | X | 8.23 | 85.19 | 23.12 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 7.42 | 91.37 | 26.44 | | 65.0 | |
| | | Z | 10.58 | 92.51 | 26.91 | | 65.0 | |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | X | 7.55 | 82.84 | 21.72 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.51 | 87.87 | 24.49 | | 65.0 | |
| | | Z | 10.25 | 90.62 | 25.65 | | 65.0 | |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | X | 6.67 | 85.48 | 25.12 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 3.69 | 80.81 | 24.99 | | 65.0 | |
| | | Z | 6.44 | 87.27 | 27.13 | | 65.0 | |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | X | 7.78 | 84.18 | 22.69 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.69 | 89.39 | 25.70 | | 65.0 | |
| | | Z | 9.90 | 91.18 | 26.39 | | 65.0 | |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | X | 7.14 | 81.92 | 21.34 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.85 | 86.04 | 23.80 | | 65.0 | |
| | | Z | 9.54 | 89.32 | 25.15 | | 65.0 | |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | X | 6.36 | 84.50 | 24.69 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 3.53 | 79.82 | 24.51 | | 65.0 | |
| | | Z | 6.16 | 86.30 | 26.70 | | 65.0 | |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | X | 7.77 | 84.16 | 22.68 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.68 | 89.37 | 25.69 | | 65.0 | |
| | | Z | 9.88 | 91.16 | 26.38 | | 65.0 | |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | X | 7.13 | 81.90 | 21.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.83 | 85.99 | 23.79 | | 65.0 | |
| | | Z | 9.51 | 89.29 | 25.14 | | 65.0 | |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 6.09 | 83.61 | 24.25 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 3.42 | 79.13 | 24.11 | | 65.0 | |
| | | Z | 5.93 | 85.47 | 26.28 | | 65.0 | |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | X | 7.78 | 84.19 | 22.69 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.68 | 89.41 | 25.71 | | 65.0 | |
| | | Z | 9.89 | 91.19 | 26.39 | | 65.0 | |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 7.18 | 81.96 | 21.35 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 5.91 | 86.16 | 23.84 | | 65.0 | |
| | | Z | 9.62 | 89.44 | 25.18 | | 65.0 | |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 6.36 | 84.53 | 24.70 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 3.52 | 79.81 | 24.52 | | 65.0 | |
| | | Z | 6.16 | 86.34 | 26.72 | | 65.0 | |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 7.75 | 84.14 | 22.67 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 6.66 | 89.35 | 25.68 | | 65.0 | |
| | | Z | 9.86 | 91.13 | 26.37 | | 65.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|-------------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 7.11 | 81.87 | 21.32 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.81 | 85.95 | 23.78 | | 65.0 | |
| | | Z | 9.48 | 89.25 | 25.13 | | 65.0 | |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 6.34 | 84.51 | 24.69 | 6.02 | 65.0 | $\pm 9.6\%$ |
| | | Y | 3.52 | 79.81 | 24.52 | | 65.0 | |
| | | Z | 6.14 | 86.30 | 26.70 | | 65.0 | |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 7.98 | 81.00 | 24.33 | 6.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 6.14 | 81.54 | 25.53 | | 65.0 | |
| | | Z | 7.26 | 79.71 | 24.64 | | 65.0 | |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.47 | 76.99 | 22.66 | 6.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.99 | 77.45 | 23.83 | | 65.0 | |
| | | Z | 6.91 | 78.72 | 24.15 | | 65.0 | |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 5.40 | 74.34 | 22.44 | 6.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.21 | 73.63 | 23.07 | | 65.0 | |
| | | Z | 5.61 | 75.34 | 23.62 | | 65.0 | |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 3.76 | 67.79 | 12.85 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 1.87 | 62.25 | 8.40 | | 65.0 | |
| | | Z | 4.41 | 71.62 | 16.01 | | 65.0 | |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 3.71 | 67.43 | 12.64 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 1.87 | 62.05 | 8.24 | | 65.0 | |
| | | Z | 4.30 | 70.99 | 15.67 | | 65.0 | |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 4.05 | 72.21 | 15.44 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 1.80 | 64.42 | 10.44 | | 65.0 | |
| | | Z | 3.80 | 73.10 | 16.90 | | 65.0 | |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | X | 4.44 | 71.15 | 15.84 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 2.54 | 65.63 | 11.89 | | 65.0 | |
| | | Z | 4.00 | 70.77 | 16.63 | | 65.0 | |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 4.38 | 70.57 | 15.58 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 2.50 | 65.09 | 11.62 | | 65.0 | |
| | | Z | 4.00 | 70.27 | 16.39 | | 65.0 | |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | X | 6.22 | 78.94 | 19.39 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 3.43 | 72.93 | 16.18 | | 65.0 | |
| | | Z | 5.02 | 77.51 | 19.84 | | 65.0 | |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 6.14 | 76.63 | 20.38 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.51 | 74.09 | 18.97 | | 65.0 | |
| | | Z | 5.00 | 73.95 | 19.97 | | 65.0 | |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | X | 5.56 | 73.72 | 18.77 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 3.95 | 70.70 | 16.95 | | 65.0 | |
| | | Z | 4.76 | 71.87 | 18.65 | | 65.0 | |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 7.45 | 81.83 | 21.98 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 5.54 | 80.55 | 21.60 | | 65.0 | |
| | | Z | 5.55 | 78.23 | 21.33 | | 65.0 | |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 5.77 | 73.44 | 19.25 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.37 | 71.25 | 18.16 | | 65.0 | |
| | | Z | 4.94 | 71.30 | 18.85 | | 65.0 | |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 6.22 | 74.67 | 20.11 | 3.98 | 65.0 | $\pm 9.6\%$ |
| | | Y | 4.73 | 72.48 | 19.03 | | 65.0 | |
| | | Z | 5.27 | 72.27 | 19.61 | | 65.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | X | 6.76 | 78.48 | 21.18 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.16 | 77.25 | 20.99 | | 65.0 | |
| | | Z | 5.37 | 75.38 | 20.49 | | 65.0 | |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 2.78 | 64.16 | 9.93 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.36 | 60.00 | 5.83 | | 65.0 | |
| | | Z | 3.18 | 67.02 | 12.70 | | 65.0 | |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 2.75 | 63.84 | 9.69 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.38 | 60.00 | 5.75 | | 65.0 | |
| | | Z | 3.11 | 66.43 | 12.31 | | 65.0 | |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 2.69 | 66.45 | 11.77 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 1.25 | 60.72 | 7.00 | | 65.0 | |
| | | Z | 2.70 | 67.95 | 13.57 | | 65.0 | |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 5.09 | 73.24 | 17.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.20 | 68.61 | 14.39 | | 65.0 | |
| | | Z | 4.40 | 72.05 | 17.89 | | 65.0 | |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | X | 5.09 | 72.94 | 17.39 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.20 | 68.30 | 14.22 | | 65.0 | |
| | | Z | 4.44 | 71.81 | 17.78 | | 65.0 | |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | X | 6.43 | 79.43 | 20.17 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.14 | 75.58 | 18.12 | | 65.0 | |
| | | Z | 5.00 | 77.05 | 20.16 | | 65.0 | |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 6.11 | 76.51 | 20.31 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.48 | 73.95 | 18.88 | | 65.0 | |
| | | Z | 4.98 | 73.88 | 19.92 | | 65.0 | |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 5.55 | 73.70 | 18.77 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 3.94 | 70.69 | 16.95 | | 65.0 | |
| | | Z | 4.76 | 71.84 | 18.64 | | 65.0 | |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 7.33 | 81.55 | 21.85 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.45 | 80.22 | 21.44 | | 65.0 | |
| | | Z | 5.49 | 78.02 | 21.23 | | 65.0 | |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 5.87 | 73.86 | 19.53 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.46 | 71.68 | 18.63 | | 65.0 | |
| | | Z | 5.02 | 71.71 | 19.09 | | 65.0 | |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 6.39 | 75.29 | 20.53 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 4.89 | 73.18 | 19.70 | | 65.0 | |
| | | Z | 5.38 | 72.78 | 19.95 | | 65.0 | |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 7.04 | 78.96 | 21.22 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.43 | 77.99 | 21.30 | | 65.0 | |
| | | Z | 5.60 | 75.97 | 20.54 | | 65.0 | |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 6.56 | 74.07 | 20.20 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.15 | 72.08 | 19.58 | | 65.0 | |
| | | Z | 5.68 | 71.86 | 19.63 | | 65.0 | |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | X | 6.55 | 73.70 | 20.08 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.19 | 71.84 | 19.47 | | 65.0 | |
| | | Z | 5.68 | 71.51 | 19.52 | | 65.0 | |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 6.77 | 76.24 | 20.42 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 5.40 | 75.25 | 20.50 | | 65.0 | |
| | | Z | 5.66 | 73.75 | 19.79 | | 65.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|-------|-------|-------|------|-------|-------------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10) | X | 2.43 | 66.71 | 14.85 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.33 | 68.15 | 14.74 | | 150.0 | |
| | | Z | 2.38 | 65.72 | 14.40 | | 150.0 | |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.47 | 67.75 | 15.10 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.72 | 72.43 | 16.90 | | 150.0 | |
| | | Z | 1.36 | 65.94 | 13.97 | | 150.0 | |
| 10277-CAA | PHS (QPSK) | X | 1.92 | 60.08 | 5.51 | 9.03 | 50.0 | $\pm 9.6\%$ |
| | | Y | 1.38 | 58.77 | 3.99 | | 50.0 | |
| | | Z | 1.98 | 60.78 | 6.41 | | 50.0 | |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | X | 3.08 | 65.19 | 10.55 | 9.03 | 50.0 | $\pm 9.6\%$ |
| | | Y | 2.17 | 61.96 | 7.67 | | 50.0 | |
| | | Z | 3.52 | 67.85 | 12.76 | | 50.0 | |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 3.15 | 65.40 | 10.71 | 9.03 | 50.0 | $\pm 9.6\%$ |
| | | Y | 2.20 | 62.03 | 7.77 | | 50.0 | |
| | | Z | 3.61 | 68.12 | 12.94 | | 50.0 | |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate | X | 0.92 | 64.86 | 10.52 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.39 | 60.00 | 5.42 | | 150.0 | |
| | | Z | 0.92 | 63.92 | 10.28 | | 150.0 | |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate | X | 0.56 | 63.07 | 9.34 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.29 | 60.00 | 5.06 | | 150.0 | |
| | | Z | 0.54 | 61.87 | 8.78 | | 150.0 | |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate | X | 0.78 | 67.26 | 11.80 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.28 | 60.00 | 5.38 | | 150.0 | |
| | | Z | 0.61 | 63.79 | 10.15 | | 150.0 | |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate | X | 2.07 | 78.82 | 16.86 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.39 | 62.28 | 7.09 | | 150.0 | |
| | | Z | 0.82 | 67.12 | 12.27 | | 150.0 | |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | X | 10.77 | 83.93 | 21.20 | 9.03 | 50.0 | $\pm 9.6\%$ |
| | | Y | 21.51 | 90.17 | 21.22 | | 50.0 | |
| | | Z | 9.58 | 84.17 | 22.47 | | 50.0 | |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | X | 2.52 | 69.39 | 16.43 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 2.55 | 71.75 | 17.73 | | 150.0 | |
| | | Z | 2.42 | 68.12 | 15.56 | | 150.0 | |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 1.11 | 64.88 | 11.35 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.56 | 60.19 | 6.52 | | 150.0 | |
| | | Z | 1.13 | 64.17 | 11.22 | | 150.0 | |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | X | 1.42 | 62.80 | 9.08 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.76 | 60.00 | 5.28 | | 150.0 | |
| | | Z | 1.91 | 65.84 | 11.56 | | 150.0 | |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 1.21 | 60.93 | 7.40 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.73 | 60.00 | 4.72 | | 150.0 | |
| | | Z | 1.52 | 62.72 | 9.26 | | 150.0 | |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | X | 4.38 | 65.24 | 17.03 | 4.17 | 50.0 | $\pm 9.6\%$ |
| | | Y | 4.10 | 66.08 | 16.99 | | 50.0 | |
| | | Z | 4.53 | 65.17 | 17.06 | | 50.0 | |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 4.87 | 65.87 | 17.74 | 4.96 | 50.0 | $\pm 9.6\%$ |
| | | Y | 4.52 | 66.36 | 17.57 | | 50.0 | |
| | | Z | 5.00 | 65.70 | 17.71 | | 50.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|---------------|--|---|------|-------|-------|-------|-------|---------|
| 10303- AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC) | X | 4.64 | 65.56 | 17.55 | 4.96 | 50.0 | ± 9.6 % |
| | | Y | 4.40 | 66.71 | 17.70 | | 50.0 | |
| | | Z | 4.76 | 65.34 | 17.52 | | 50.0 | |
| 10304- AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 4.47 | 65.53 | 17.12 | 4.17 | 50.0 | ± 9.6 % |
| | | Y | 4.17 | 66.24 | 17.01 | | 50.0 | |
| | | Z | 4.56 | 65.19 | 17.01 | | 50.0 | |
| 10305- AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | X | 4.18 | 67.59 | 18.77 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 3.89 | 67.96 | 17.61 | | 35.0 | |
| | | Z | 4.33 | 67.73 | 19.13 | | 35.0 | |
| 10306- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | X | 4.44 | 66.50 | 18.52 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.16 | 67.24 | 17.98 | | 35.0 | |
| | | Z | 4.60 | 66.59 | 18.78 | | 35.0 | |
| 10307- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 4.34 | 66.59 | 18.45 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.05 | 67.23 | 17.84 | | 35.0 | |
| | | Z | 4.50 | 66.72 | 18.72 | | 35.0 | |
| 10308- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | X | 4.32 | 66.82 | 18.60 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.06 | 67.54 | 18.06 | | 35.0 | |
| | | Z | 4.48 | 66.95 | 18.87 | | 35.0 | |
| 10309- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 4.46 | 66.56 | 18.61 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.17 | 67.31 | 18.10 | | 35.0 | |
| | | Z | 4.64 | 66.74 | 18.90 | | 35.0 | |
| 10310- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | X | 4.40 | 66.58 | 18.52 | 6.02 | 35.0 | ± 9.6 % |
| | | Y | 4.14 | 67.40 | 18.05 | | 35.0 | |
| | | Z | 4.55 | 66.67 | 18.78 | | 35.0 | |
| 10311- AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 2.88 | 68.63 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.88 | 70.38 | 17.20 | | 150.0 | |
| | | Z | 2.77 | 67.46 | 15.32 | | 150.0 | |
| 10313- AAA | iDEN 1:3 | X | 3.55 | 71.03 | 14.37 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 2.76 | 72.05 | 15.47 | | 70.0 | |
| | | Z | 2.49 | 69.17 | 14.17 | | 70.0 | |
| 10314- AAA | iDEN 1:6 | X | 6.09 | 81.23 | 20.99 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 7.74 | 88.37 | 24.07 | | 30.0 | |
| | | Z | 3.89 | 76.29 | 19.81 | | 30.0 | |
| 10315- AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.04 | 63.85 | 14.96 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.05 | 65.58 | 16.18 | | 150.0 | |
| | | Z | 0.96 | 62.52 | 14.00 | | 150.0 | |
| 10316- AAB | IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle) | X | 4.35 | 66.66 | 16.11 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.12 | 67.27 | 16.33 | | 150.0 | |
| | | Z | 4.39 | 66.31 | 15.96 | | 150.0 | |
| 10317- AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | X | 4.35 | 66.66 | 16.11 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.12 | 67.27 | 16.33 | | 150.0 | |
| | | Z | 4.39 | 66.31 | 15.96 | | 150.0 | |
| 10400- AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | X | 4.42 | 66.96 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.13 | 67.43 | 16.34 | | 150.0 | |
| | | Z | 4.47 | 66.60 | 15.95 | | 150.0 | |
| 10401- AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | X | 5.08 | 66.77 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.02 | 67.75 | 16.71 | | 150.0 | |
| | | Z | 5.22 | 66.85 | 16.19 | | 150.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|--------|--------|-------|------|-------|-------------|
| 10402-AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | X | 5.43 | 67.35 | 16.36 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 5.23 | 67.81 | 16.59 | | 150.0 | |
| | | Z | 5.46 | 67.09 | 16.19 | | 150.0 | |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 0.92 | 64.86 | 10.52 | 0.00 | 115.0 | $\pm 9.6\%$ |
| | | Y | 0.39 | 60.00 | 5.42 | | 115.0 | |
| | | Z | 0.92 | 63.92 | 10.28 | | 115.0 | |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A) | X | 0.92 | 64.86 | 10.52 | 0.00 | 115.0 | $\pm 9.6\%$ |
| | | Y | 0.39 | 60.00 | 5.42 | | 115.0 | |
| | | Z | 0.92 | 63.92 | 10.28 | | 115.0 | |
| 10406-AAB | CDMA2000, RC3, SC32, SCH0, Full Rate | X | 6.61 | 82.29 | 18.19 | 0.00 | 100.0 | $\pm 9.6\%$ |
| | | Y | 100.00 | 99.95 | 18.83 | | 100.0 | |
| | | Z | 45.79 | 108.43 | 26.26 | | 100.0 | |
| 10410-AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | X | 3.30 | 74.41 | 15.15 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 16.11 | 88.20 | 22.53 | | 80.0 | |
| | | Z | 23.08 | 102.83 | 25.32 | | 80.0 | |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | X | 0.96 | 62.96 | 14.43 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 0.99 | 64.96 | 15.77 | | 150.0 | |
| | | Z | 0.90 | 61.91 | 13.52 | | 150.0 | |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle) | X | 4.32 | 66.73 | 16.13 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.11 | 67.43 | 16.39 | | 150.0 | |
| | | Z | 4.34 | 66.32 | 15.91 | | 150.0 | |
| 10417-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | X | 4.32 | 66.73 | 16.13 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.11 | 67.43 | 16.39 | | 150.0 | |
| | | Z | 4.34 | 66.32 | 15.91 | | 150.0 | |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble) | X | 4.31 | 66.93 | 16.18 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.10 | 67.68 | 16.50 | | 150.0 | |
| | | Z | 4.33 | 66.49 | 15.93 | | 150.0 | |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.33 | 66.86 | 16.17 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.11 | 67.59 | 16.46 | | 150.0 | |
| | | Z | 4.35 | 66.43 | 15.93 | | 150.0 | |
| 10422-AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.43 | 66.84 | 16.18 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.21 | 67.51 | 16.45 | | 150.0 | |
| | | Z | 4.46 | 66.43 | 15.95 | | 150.0 | |
| 10423-AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | X | 4.56 | 67.09 | 16.27 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.30 | 67.73 | 16.52 | | 150.0 | |
| | | Z | 4.61 | 66.71 | 16.06 | | 150.0 | |
| 10424-AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | X | 4.49 | 67.05 | 16.24 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.23 | 67.65 | 16.49 | | 150.0 | |
| | | Z | 4.53 | 66.66 | 16.03 | | 150.0 | |
| 10425-AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | X | 5.11 | 67.24 | 16.43 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.85 | 67.48 | 16.62 | | 150.0 | |
| | | Z | 5.16 | 66.98 | 16.26 | | 150.0 | |
| 10426-AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | X | 5.13 | 67.32 | 16.47 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.90 | 67.67 | 16.71 | | 150.0 | |
| | | Z | 5.18 | 67.07 | 16.30 | | 150.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|-------|--------|-------|------|-------|---------|
| 10427-AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.10 | 67.11 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.87 | 67.47 | 16.61 | | 150.0 | |
| | | Z | 5.17 | 66.96 | 16.24 | | 150.0 | |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | X | 4.40 | 73.18 | 18.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.18 | 77.79 | 19.68 | | 150.0 | |
| | | Z | 4.07 | 70.86 | 17.81 | | 150.0 | |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | X | 3.93 | 67.31 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.67 | 68.21 | 16.08 | | 150.0 | |
| | | Z | 3.97 | 66.78 | 15.76 | | 150.0 | |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | 4.25 | 67.14 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.00 | 67.91 | 16.40 | | 150.0 | |
| | | Z | 4.29 | 66.70 | 15.93 | | 150.0 | |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | X | 4.51 | 67.08 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.26 | 67.71 | 16.52 | | 150.0 | |
| | | Z | 4.55 | 66.70 | 16.05 | | 150.0 | |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH) | X | 4.57 | 74.23 | 18.62 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.96 | 77.01 | 18.39 | | 150.0 | |
| | | Z | 4.13 | 71.55 | 17.59 | | 150.0 | |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.22 | 74.05 | 14.97 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 12.58 | 95.13 | 21.66 | | 80.0 | |
| | | Z | 20.50 | 101.13 | 24.83 | | 80.0 | |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.16 | 67.07 | 14.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.72 | 66.94 | 13.70 | | 150.0 | |
| | | Z | 3.20 | 66.46 | 14.68 | | 150.0 | |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 3.80 | 67.10 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.57 | 68.05 | 15.99 | | 150.0 | |
| | | Z | 3.82 | 66.56 | 15.62 | | 150.0 | |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.09 | 66.98 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.88 | 67.77 | 16.33 | | 150.0 | |
| | | Z | 4.12 | 66.51 | 15.82 | | 150.0 | |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.31 | 66.86 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.10 | 67.50 | 16.40 | | 150.0 | |
| | | Z | 4.33 | 66.45 | 15.89 | | 150.0 | |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%) | X | 2.96 | 66.79 | 14.05 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.28 | 65.25 | 11.94 | | 150.0 | |
| | | Z | 3.03 | 66.33 | 14.05 | | 150.0 | |
| 10456-AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle) | X | 6.03 | 67.73 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 6.14 | 68.84 | 17.23 | | 150.0 | |
| | | Z | 6.09 | 67.66 | 16.51 | | 150.0 | |
| 10457-AAA | UMTS-FDD (DC-HSDPA) | X | 3.67 | 65.47 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.57 | 66.44 | 16.21 | | 150.0 | |
| | | Z | 3.66 | 65.00 | 15.61 | | 150.0 | |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers) | X | 3.82 | 71.77 | 16.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.33 | 66.01 | 12.18 | | 150.0 | |
| | | Z | 3.66 | 70.24 | 16.55 | | 150.0 | |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers) | X | 5.04 | 70.06 | 18.38 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 69.08 | 16.37 | | 150.0 | |
| | | Z | 4.93 | 68.74 | 17.97 | | 150.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|-------|-------------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR) | X | 0.82 | 68.06 | 15.67 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 1.52 | 80.43 | 21.00 | | 150.0 | |
| | | Z | 0.70 | 65.12 | 13.61 | | 150.0 | |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.71 | 68.46 | 13.76 | 3.29 | 80.0 | $\pm 9.6\%$ |
| | | Y | 18.73 | 104.14 | 25.37 | | 80.0 | |
| | | Z | 16.72 | 101.23 | 25.84 | | 80.0 | |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.95 | 60.00 | 7.25 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.26 | 55.18 | 3.00 | | 80.0 | |
| | | Z | 1.02 | 61.47 | 8.87 | | 80.0 | |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.96 | 60.00 | 6.79 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.83 | 65.07 | 6.10 | | 80.0 | |
| | | Z | 0.88 | 60.00 | 7.59 | | 80.0 | |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.35 | 65.72 | 12.06 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.75 | 82.77 | 18.52 | | 80.0 | |
| | | Z | 9.51 | 92.26 | 22.65 | | 80.0 | |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.95 | 60.00 | 7.20 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.25 | 55.06 | 2.87 | | 80.0 | |
| | | Z | 0.96 | 60.91 | 8.53 | | 80.0 | |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.97 | 60.00 | 6.75 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.08 | 64.36 | 5.91 | | 80.0 | |
| | | Z | 0.88 | 60.00 | 7.54 | | 80.0 | |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.38 | 66.05 | 12.23 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.97 | 86.13 | 19.58 | | 80.0 | |
| | | Z | 11.48 | 94.80 | 23.39 | | 80.0 | |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.95 | 60.00 | 7.22 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.26 | 55.12 | 2.95 | | 80.0 | |
| | | Z | 0.97 | 61.07 | 8.63 | | 80.0 | |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.96 | 60.00 | 6.75 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.73 | 65.04 | 6.11 | | 80.0 | |
| | | Z | 0.88 | 60.00 | 7.54 | | 80.0 | |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.38 | 66.03 | 12.21 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 5.04 | 86.32 | 19.63 | | 80.0 | |
| | | Z | 11.56 | 94.91 | 23.42 | | 80.0 | |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.95 | 60.00 | 7.21 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.25 | 55.11 | 2.92 | | 80.0 | |
| | | Z | 0.97 | 61.03 | 8.59 | | 80.0 | |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.96 | 60.00 | 6.74 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 8.84 | 67.69 | 6.73 | | 80.0 | |
| | | Z | 0.88 | 60.00 | 7.53 | | 80.0 | |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.37 | 66.01 | 12.20 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 4.94 | 86.08 | 19.55 | | 80.0 | |
| | | Z | 11.45 | 94.77 | 23.37 | | 80.0 | |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.94 | 60.00 | 7.21 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.25 | 55.09 | 2.91 | | 80.0 | |
| | | Z | 0.96 | 61.01 | 8.58 | | 80.0 | |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.96 | 60.00 | 6.74 | 3.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 5.48 | 65.71 | 6.11 | | 80.0 | |
| | | Z | 0.88 | 60.00 | 7.53 | | 80.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.94 | 60.00 | 7.19 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.25 | 55.02 | 2.62 | | 80.0 | |
| | | Z | 0.95 | 60.87 | 8.49 | | 80.0 | |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.96 | 60.00 | 6.73 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.28 | 53.97 | 1.35 | | 80.0 | |
| | | Z | 0.88 | 60.00 | 7.52 | | 80.0 | |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.21 | 72.74 | 16.33 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 39.60 | 110.75 | 27.52 | | 80.0 | |
| | | Z | 6.66 | 84.68 | 21.96 | | 80.0 | |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.08 | 64.62 | 11.24 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 1.03 | 61.93 | 8.80 | | 80.0 | |
| | | Z | 4.36 | 74.13 | 16.27 | | 80.0 | |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.78 | 62.75 | 10.02 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 0.84 | 60.00 | 7.33 | | 80.0 | |
| | | Z | 3.24 | 70.04 | 14.31 | | 80.0 | |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.73 | 64.95 | 12.00 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 0.84 | 60.00 | 7.70 | | 80.0 | |
| | | Z | 1.75 | 65.57 | 13.09 | | 80.0 | |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.61 | 61.02 | 9.13 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.09 | 60.00 | 6.49 | | 80.0 | |
| | | Z | 2.56 | 66.79 | 13.19 | | 80.0 | |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.61 | 60.82 | 9.02 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.11 | 60.00 | 6.48 | | 80.0 | |
| | | Z | 2.45 | 66.04 | 12.85 | | 80.0 | |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.62 | 70.06 | 15.66 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.92 | 68.50 | 13.94 | | 80.0 | |
| | | Z | 2.29 | 68.71 | 15.73 | | 80.0 | |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.37 | 65.68 | 13.03 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.24 | 60.58 | 8.96 | | 80.0 | |
| | | Z | 2.33 | 65.68 | 13.73 | | 80.0 | |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.37 | 65.34 | 12.86 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 1.24 | 60.28 | 8.75 | | 80.0 | |
| | | Z | 2.35 | 65.41 | 13.59 | | 80.0 | |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.19 | 71.23 | 17.45 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.91 | 73.05 | 18.24 | | 80.0 | |
| | | Z | 2.77 | 69.32 | 17.00 | | 80.0 | |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.21 | 68.38 | 16.16 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.80 | 68.89 | 15.94 | | 80.0 | |
| | | Z | 2.91 | 66.98 | 15.94 | | 80.0 | |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.28 | 68.24 | 16.11 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 2.81 | 68.47 | 15.72 | | 80.0 | |
| | | Z | 3.00 | 66.92 | 15.92 | | 80.0 | |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.47 | 70.14 | 17.34 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.03 | 70.90 | 17.92 | | 80.0 | |
| | | Z | 3.12 | 68.57 | 16.90 | | 80.0 | |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.59 | 67.96 | 16.53 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.13 | 68.26 | 16.56 | | 80.0 | |
| | | Z | 3.32 | 66.68 | 16.23 | | 80.0 | |

EX3DV4-- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|------|-------------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.65 | 67.84 | 16.48 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.17 | 68.05 | 16.43 | | 80.0 | |
| | | Z | 3.39 | 66.61 | 16.21 | | 80.0 | |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.72 | 71.32 | 17.72 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.26 | 72.17 | 18.50 | | 80.0 | |
| | | Z | 3.30 | 69.67 | 17.25 | | 80.0 | |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.62 | 68.25 | 16.75 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.18 | 68.50 | 16.94 | | 80.0 | |
| | | Z | 3.33 | 66.95 | 16.42 | | 80.0 | |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.71 | 68.07 | 16.72 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.25 | 68.28 | 16.85 | | 80.0 | |
| | | Z | 3.43 | 66.81 | 16.39 | | 80.0 | |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 1.07 | 60.00 | 8.19 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 0.87 | 60.00 | 5.66 | | 80.0 | |
| | | Z | 1.16 | 61.09 | 9.64 | | 80.0 | |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.24 | 60.00 | 7.11 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 1.51 | 60.00 | 4.12 | | 80.0 | |
| | | Z | 1.24 | 60.00 | 7.97 | | 80.0 | |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.26 | 60.00 | 6.97 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 1.84 | 60.00 | 3.85 | | 80.0 | |
| | | Z | 1.26 | 60.00 | 7.82 | | 80.0 | |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 2.86 | 70.59 | 16.41 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 2.47 | 71.37 | 16.06 | | 80.0 | |
| | | Z | 2.47 | 68.90 | 16.23 | | 80.0 | |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.77 | 67.13 | 14.41 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 1.82 | 64.08 | 11.77 | | 80.0 | |
| | | Z | 2.61 | 66.45 | 14.70 | | 80.0 | |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.80 | 66.92 | 14.24 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 1.80 | 63.62 | 11.44 | | 80.0 | |
| | | Z | 2.65 | 66.33 | 14.58 | | 80.0 | |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.15 | 71.01 | 17.34 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 2.85 | 72.73 | 18.09 | | 80.0 | |
| | | Z | 2.74 | 69.14 | 16.90 | | 80.0 | |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.18 | 68.25 | 16.09 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 2.77 | 68.71 | 15.84 | | 80.0 | |
| | | Z | 2.89 | 66.89 | 15.87 | | 80.0 | |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.26 | 68.13 | 16.04 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 2.78 | 68.31 | 15.63 | | 80.0 | |
| | | Z | 2.99 | 66.83 | 15.86 | | 80.0 | |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 3.68 | 71.16 | 17.64 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.23 | 71.98 | 18.40 | | 80.0 | |
| | | Z | 3.28 | 69.54 | 17.18 | | 80.0 | |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.60 | 68.17 | 16.71 | 2.23 | 80.0 | $\pm 9.6\%$ |
| | | Y | 3.16 | 68.41 | 16.88 | | 80.0 | |
| | | Z | 3.32 | 66.89 | 16.38 | | 80.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.69 | 67.98 | 16.67 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.23 | 68.18 | 16.79 | | 80.0 | |
| | | Z | 3.42 | 66.74 | 16.35 | | 80.0 | |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.09 | 70.27 | 17.38 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.57 | 70.54 | 17.94 | | 80.0 | |
| | | Z | 3.72 | 68.92 | 16.97 | | 80.0 | |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.09 | 67.97 | 16.86 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.56 | 67.74 | 16.96 | | 80.0 | |
| | | Z | 3.82 | 66.86 | 16.53 | | 80.0 | |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.17 | 67.81 | 16.83 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.64 | 67.61 | 16.92 | | 80.0 | |
| | | Z | 3.90 | 66.70 | 16.51 | | 80.0 | |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.18 | 71.35 | 17.66 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.66 | 71.62 | 18.28 | | 80.0 | |
| | | Z | 3.77 | 69.95 | 17.25 | | 80.0 | |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.98 | 68.10 | 16.91 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.47 | 67.78 | 17.03 | | 80.0 | |
| | | Z | 3.70 | 66.98 | 16.58 | | 80.0 | |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.02 | 67.80 | 16.84 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.52 | 67.49 | 16.93 | | 80.0 | |
| | | Z | 3.75 | 66.69 | 16.51 | | 80.0 | |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.92 | 63.12 | 14.48 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.96 | 65.32 | 15.94 | | 150.0 | |
| | | Z | 0.86 | 62.01 | 13.50 | | 150.0 | |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | X | 0.54 | 70.00 | 16.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.46 | 99.33 | 28.61 | | 150.0 | |
| | | Z | 0.41 | 65.69 | 13.40 | | 150.0 | |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.76 | 64.84 | 14.98 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.86 | 68.98 | 17.56 | | 150.0 | |
| | | Z | 0.68 | 63.15 | 13.53 | | 150.0 | |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | X | 4.31 | 66.83 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.10 | 67.60 | 16.42 | | 150.0 | |
| | | Z | 4.33 | 66.40 | 15.88 | | 150.0 | |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.45 | 66.99 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.21 | 67.71 | 16.48 | | 150.0 | |
| | | Z | 4.49 | 66.60 | 15.99 | | 150.0 | |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | X | 4.31 | 66.93 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.08 | 67.63 | 16.41 | | 150.0 | |
| | | Z | 4.35 | 66.53 | 15.90 | | 150.0 | |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | X | 4.24 | 66.89 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.01 | 67.52 | 16.35 | | 150.0 | |
| | | Z | 4.28 | 66.50 | 15.87 | | 150.0 | |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | X | 4.29 | 67.01 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.02 | 67.52 | 16.36 | | 150.0 | |
| | | Z | 4.34 | 66.64 | 15.98 | | 150.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.22 | 67.02 | 16.12 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.02 | 67.85 | 16.48 | | 150.0 | |
| | | Z | 4.24 | 66.53 | 15.84 | | 150.0 | |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.25 | 66.98 | 16.19 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.00 | 67.65 | 16.47 | | 150.0 | |
| | | Z | 4.28 | 66.56 | 15.95 | | 150.0 | |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | X | 4.28 | 66.09 | 15.82 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.09 | 66.89 | 16.17 | | 150.0 | |
| | | Z | 4.29 | 65.63 | 15.56 | | 150.0 | |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | X | 4.40 | 66.37 | 15.93 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.16 | 67.06 | 16.24 | | 150.0 | |
| | | Z | 4.43 | 65.94 | 15.69 | | 150.0 | |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.33 | 66.34 | 15.87 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.12 | 67.09 | 16.20 | | 150.0 | |
| | | Z | 4.36 | 65.89 | 15.62 | | 150.0 | |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | X | 4.35 | 66.35 | 15.90 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.12 | 67.05 | 16.21 | | 150.0 | |
| | | Z | 4.37 | 65.91 | 15.65 | | 150.0 | |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | X | 4.35 | 66.35 | 15.90 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.12 | 67.05 | 16.21 | | 150.0 | |
| | | Z | 4.37 | 65.91 | 15.65 | | 150.0 | |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | X | 4.31 | 66.37 | 15.88 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.07 | 67.03 | 16.17 | | 150.0 | |
| | | Z | 4.35 | 65.96 | 15.64 | | 150.0 | |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | X | 4.19 | 66.23 | 15.81 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 3.98 | 66.94 | 16.12 | | 150.0 | |
| | | Z | 4.22 | 65.81 | 15.56 | | 150.0 | |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.35 | 66.43 | 15.91 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.13 | 67.21 | 16.24 | | 150.0 | |
| | | Z | 4.38 | 65.98 | 15.65 | | 150.0 | |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | X | 4.91 | 66.34 | 15.97 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.69 | 66.74 | 16.24 | | 150.0 | |
| | | Z | 4.94 | 66.04 | 15.77 | | 150.0 | |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | X | 4.95 | 66.47 | 16.03 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.71 | 66.81 | 16.28 | | 150.0 | |
| | | Z | 4.99 | 66.21 | 15.85 | | 150.0 | |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | X | 4.84 | 66.47 | 16.01 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.62 | 66.84 | 16.27 | | 150.0 | |
| | | Z | 4.87 | 66.16 | 15.80 | | 150.0 | |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 4.90 | 66.47 | 16.01 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.71 | 66.93 | 16.32 | | 150.0 | |
| | | Z | 4.93 | 66.13 | 15.79 | | 150.0 | |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | X | 4.97 | 66.42 | 16.03 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.73 | 66.75 | 16.26 | | 150.0 | |
| | | Z | 5.00 | 66.13 | 15.84 | | 150.0 | |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 4.90 | 66.38 | 16.03 | 0.00 | 150.0 | $\pm 9.6\%$ |
| | | Y | 4.67 | 66.70 | 16.26 | | 150.0 | |
| | | Z | 4.93 | 66.11 | 15.84 | | 150.0 | |

EX3DV4-- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle) | X | 4.88 | 66.31 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.67 | 66.70 | 16.23 | | 150.0 | |
| | | Z | 4.91 | 66.01 | 15.77 | | 150.0 | |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.04 | 66.41 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.80 | 66.76 | 16.28 | | 150.0 | |
| | | Z | 5.07 | 66.11 | 15.85 | | 150.0 | |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | X | 5.11 | 66.49 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.85 | 66.80 | 16.33 | | 150.0 | |
| | | Z | 5.14 | 66.14 | 15.89 | | 150.0 | |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | X | 5.25 | 66.42 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.07 | 66.65 | 16.18 | | 150.0 | |
| | | Z | 5.27 | 66.15 | 15.78 | | 150.0 | |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | X | 5.42 | 66.84 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.21 | 67.04 | 16.34 | | 150.0 | |
| | | Z | 5.45 | 66.60 | 15.96 | | 150.0 | |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.28 | 66.54 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.09 | 66.74 | 16.19 | | 150.0 | |
| | | Z | 5.31 | 66.30 | 15.82 | | 150.0 | |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | X | 5.36 | 66.65 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.22 | 67.07 | 16.36 | | 150.0 | |
| | | Z | 5.39 | 66.38 | 15.86 | | 150.0 | |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.50 | 67.24 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.18 | 67.11 | 16.36 | | 150.0 | |
| | | Z | 5.58 | 67.16 | 16.22 | | 150.0 | |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | X | 5.34 | 66.72 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.22 | 67.23 | 16.45 | | 150.0 | |
| | | Z | 5.36 | 66.42 | 15.90 | | 150.0 | |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.28 | 66.50 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.06 | 66.66 | 16.14 | | 150.0 | |
| | | Z | 5.33 | 66.34 | 15.82 | | 150.0 | |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.26 | 66.54 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.07 | 66.82 | 16.21 | | 150.0 | |
| | | Z | 5.27 | 66.23 | 15.76 | | 150.0 | |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.31 | 66.48 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.11 | 66.71 | 16.17 | | 150.0 | |
| | | Z | 5.34 | 66.23 | 15.80 | | 150.0 | |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.67 | 66.75 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.52 | 66.90 | 16.21 | | 150.0 | |
| | | Z | 5.69 | 66.52 | 15.88 | | 150.0 | |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.76 | 66.97 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.58 | 67.06 | 16.29 | | 150.0 | |
| | | Z | 5.80 | 66.79 | 16.00 | | 150.0 | |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 5.80 | 67.08 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.63 | 67.23 | 16.36 | | 150.0 | |
| | | Z | 5.83 | 66.86 | 16.03 | | 150.0 | |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.76 | 66.95 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.57 | 67.06 | 16.29 | | 150.0 | |
| | | Z | 5.78 | 66.73 | 15.98 | | 150.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|-------|--------|-------|------|-------|---------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 5.77 | 67.00 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.54 | 66.98 | 16.27 | | 150.0 | |
| | | Z | 5.82 | 66.87 | 16.07 | | 150.0 | |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | X | 5.79 | 66.93 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.57 | 66.97 | 16.30 | | 150.0 | |
| | | Z | 5.82 | 66.74 | 16.04 | | 150.0 | |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | X | 5.72 | 66.92 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.51 | 66.95 | 16.32 | | 150.0 | |
| | | Z | 5.75 | 66.73 | 16.07 | | 150.0 | |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 5.77 | 67.08 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.56 | 67.09 | 16.39 | | 150.0 | |
| | | Z | 5.83 | 66.98 | 16.19 | | 150.0 | |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | X | 5.87 | 67.06 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.77 | 67.47 | 16.55 | | 150.0 | |
| | | Z | 5.92 | 66.90 | 16.12 | | 150.0 | |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle) | X | 4.62 | 66.82 | 16.22 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.39 | 67.43 | 16.46 | | 150.0 | |
| | | Z | 4.66 | 66.47 | 16.04 | | 150.0 | |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 4.82 | 67.25 | 16.56 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.56 | 67.87 | 16.81 | | 150.0 | |
| | | Z | 4.86 | 66.91 | 16.38 | | 150.0 | |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.65 | 67.05 | 16.34 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.40 | 67.63 | 16.58 | | 150.0 | |
| | | Z | 4.70 | 66.72 | 16.17 | | 150.0 | |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.70 | 67.52 | 16.78 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.46 | 68.13 | 17.04 | | 150.0 | |
| | | Z | 4.73 | 67.13 | 16.55 | | 150.0 | |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.54 | 66.72 | 16.04 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.23 | 67.04 | 16.12 | | 150.0 | |
| | | Z | 4.60 | 66.47 | 15.91 | | 150.0 | |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.69 | 67.76 | 16.91 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.48 | 68.53 | 17.28 | | 150.0 | |
| | | Z | 4.70 | 67.29 | 16.65 | | 150.0 | |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.68 | 67.52 | 16.79 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.43 | 68.13 | 17.07 | | 150.0 | |
| | | Z | 4.72 | 67.10 | 16.55 | | 150.0 | |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | X | 1.13 | 64.43 | 15.18 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.09 | 65.61 | 16.13 | | 130.0 | |
| | | Z | 1.02 | 62.91 | 14.24 | | 130.0 | |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | X | 1.14 | 65.04 | 15.56 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.11 | 66.40 | 16.63 | | 130.0 | |
| | | Z | 1.02 | 63.36 | 14.54 | | 130.0 | |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | X | 2.01 | 84.38 | 21.80 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 35.15 | 138.74 | 38.20 | | 130.0 | |
| | | Z | 0.86 | 72.57 | 16.97 | | 130.0 | |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.29 | 71.29 | 18.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.41 | 75.83 | 21.40 | | 130.0 | |
| | | Z | 1.02 | 67.46 | 16.65 | | 130.0 | |

EX3DV4– SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle) | X | 4.40 | 66.56 | 16.20 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.16 | 67.14 | 16.39 | | 130.0 | |
| | | Z | 4.44 | 66.24 | 16.07 | | 130.0 | |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle) | X | 4.43 | 66.78 | 16.30 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.20 | 67.45 | 16.55 | | 130.0 | |
| | | Z | 4.45 | 66.42 | 16.14 | | 130.0 | |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.59 | 67.02 | 16.46 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.33 | 67.64 | 16.68 | | 130.0 | |
| | | Z | 4.64 | 66.69 | 16.31 | | 130.0 | |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.50 | 67.20 | 16.59 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.26 | 67.87 | 16.85 | | 130.0 | |
| | | Z | 4.54 | 66.83 | 16.41 | | 130.0 | |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.24 | 66.27 | 15.75 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 3.96 | 66.67 | 15.85 | | 130.0 | |
| | | Z | 4.30 | 66.02 | 15.65 | | 130.0 | |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.27 | 66.31 | 15.76 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 3.95 | 66.55 | 15.77 | | 130.0 | |
| | | Z | 4.34 | 66.08 | 15.68 | | 130.0 | |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.41 | 67.27 | 16.55 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.19 | 68.04 | 16.88 | | 130.0 | |
| | | Z | 4.44 | 66.86 | 16.35 | | 130.0 | |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.16 | 66.00 | 15.50 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 3.86 | 66.35 | 15.58 | | 130.0 | |
| | | Z | 4.23 | 65.78 | 15.42 | | 130.0 | |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | X | 4.40 | 66.56 | 16.20 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.16 | 67.14 | 16.39 | | 130.0 | |
| | | Z | 4.44 | 66.24 | 16.07 | | 130.0 | |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | X | 4.43 | 66.78 | 16.30 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.20 | 67.45 | 16.55 | | 130.0 | |
| | | Z | 4.46 | 66.42 | 16.14 | | 130.0 | |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | X | 4.59 | 67.02 | 16.46 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.33 | 67.64 | 16.68 | | 130.0 | |
| | | Z | 4.64 | 66.69 | 16.31 | | 130.0 | |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.50 | 67.20 | 16.59 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.26 | 67.87 | 16.85 | | 130.0 | |
| | | Z | 4.54 | 66.83 | 16.41 | | 130.0 | |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.24 | 66.27 | 15.75 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 3.96 | 66.67 | 15.85 | | 130.0 | |
| | | Z | 4.30 | 66.02 | 15.65 | | 130.0 | |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | X | 4.27 | 66.31 | 15.76 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 3.95 | 66.55 | 15.77 | | 130.0 | |
| | | Z | 4.34 | 66.08 | 15.68 | | 130.0 | |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | X | 4.41 | 67.27 | 16.55 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.19 | 68.04 | 16.88 | | 130.0 | |
| | | Z | 4.44 | 66.86 | 16.35 | | 130.0 | |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | X | 4.16 | 66.00 | 15.50 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 3.86 | 66.35 | 15.58 | | 130.0 | |
| | | Z | 4.23 | 65.78 | 15.42 | | 130.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|-------------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.56 | 66.67 | 16.34 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.32 | 67.28 | 16.57 | | 130.0 | |
| | | Z | 4.59 | 66.33 | 16.20 | | 130.0 | |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.67 | 66.95 | 16.47 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.40 | 67.50 | 16.68 | | 130.0 | |
| | | Z | 4.73 | 66.64 | 16.33 | | 130.0 | |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.59 | 66.81 | 16.31 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.33 | 67.38 | 16.52 | | 130.0 | |
| | | Z | 4.64 | 66.52 | 16.18 | | 130.0 | |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.65 | 67.01 | 16.49 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.38 | 67.56 | 16.71 | | 130.0 | |
| | | Z | 4.70 | 66.70 | 16.35 | | 130.0 | |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.61 | 66.98 | 16.39 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.34 | 67.53 | 16.61 | | 130.0 | |
| | | Z | 4.66 | 66.65 | 16.24 | | 130.0 | |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.54 | 66.93 | 16.37 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.25 | 67.39 | 16.55 | | 130.0 | |
| | | Z | 4.60 | 66.62 | 16.23 | | 130.0 | |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.49 | 66.79 | 16.22 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.22 | 67.27 | 16.39 | | 130.0 | |
| | | Z | 4.55 | 66.50 | 16.09 | | 130.0 | |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.49 | 67.08 | 16.53 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.26 | 67.70 | 16.78 | | 130.0 | |
| | | Z | 4.53 | 66.74 | 16.37 | | 130.0 | |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.23 | 67.11 | 16.59 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.12 | 67.88 | 17.03 | | 130.0 | |
| | | Z | 5.27 | 66.86 | 16.46 | | 130.0 | |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.32 | 67.43 | 16.72 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.06 | 67.70 | 16.91 | | 130.0 | |
| | | Z | 5.40 | 67.28 | 16.64 | | 130.0 | |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.23 | 67.24 | 16.64 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.01 | 67.64 | 16.90 | | 130.0 | |
| | | Z | 5.29 | 67.02 | 16.53 | | 130.0 | |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.32 | 67.24 | 16.55 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.04 | 67.46 | 16.72 | | 130.0 | |
| | | Z | 5.42 | 67.18 | 16.53 | | 130.0 | |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.39 | 67.57 | 16.87 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.05 | 67.80 | 16.95 | | 130.0 | |
| | | Z | 5.48 | 67.46 | 16.80 | | 130.0 | |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.28 | 67.19 | 16.65 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.00 | 67.36 | 16.79 | | 130.0 | |
| | | Z | 5.37 | 67.14 | 16.62 | | 130.0 | |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.31 | 67.30 | 16.70 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.01 | 67.43 | 16.83 | | 130.0 | |
| | | Z | 5.39 | 67.19 | 16.65 | | 130.0 | |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.10 | 66.73 | 16.26 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.93 | 67.27 | 16.59 | | 130.0 | |
| | | Z | 5.13 | 66.48 | 16.14 | | 130.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|---|---|------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.40 | 66.00 | 15.99 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.19 | 66.71 | 16.28 | | 130.0 | |
| | | Z | 4.43 | 65.63 | 15.81 | | 130.0 | |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.54 | 66.32 | 16.13 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.28 | 66.94 | 16.39 | | 130.0 | |
| | | Z | 4.59 | 65.99 | 15.97 | | 130.0 | |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.43 | 66.14 | 15.93 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.18 | 66.77 | 16.19 | | 130.0 | |
| | | Z | 4.48 | 65.81 | 15.78 | | 130.0 | |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.48 | 66.33 | 16.12 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.24 | 66.96 | 16.39 | | 130.0 | |
| | | Z | 4.53 | 65.98 | 15.95 | | 130.0 | |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.40 | 66.11 | 15.95 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.14 | 66.70 | 16.20 | | 130.0 | |
| | | Z | 4.44 | 65.77 | 15.79 | | 130.0 | |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.38 | 66.21 | 15.97 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.09 | 66.68 | 16.16 | | 130.0 | |
| | | Z | 4.44 | 65.90 | 15.83 | | 130.0 | |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.37 | 66.02 | 15.81 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.10 | 66.52 | 16.00 | | 130.0 | |
| | | Z | 4.44 | 65.75 | 15.68 | | 130.0 | |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.36 | 66.31 | 16.11 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.12 | 66.94 | 16.38 | | 130.0 | |
| | | Z | 4.40 | 65.96 | 15.94 | | 130.0 | |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.38 | 65.89 | 15.68 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.11 | 66.48 | 15.90 | | 130.0 | |
| | | Z | 4.44 | 65.80 | 15.55 | | 130.0 | |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.04 | 66.30 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.81 | 66.63 | 16.40 | | 130.0 | |
| | | Z | 5.08 | 66.07 | 16.04 | | 130.0 | |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.07 | 66.41 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.82 | 66.57 | 16.40 | | 130.0 | |
| | | Z | 5.15 | 66.26 | 16.12 | | 130.0 | |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 4.99 | 66.49 | 16.26 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.75 | 66.78 | 16.48 | | 130.0 | |
| | | Z | 5.04 | 66.28 | 16.14 | | 130.0 | |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.01 | 66.29 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.79 | 66.70 | 16.36 | | 130.0 | |
| | | Z | 5.05 | 66.06 | 15.96 | | 130.0 | |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.07 | 66.29 | 16.14 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.80 | 66.49 | 16.29 | | 130.0 | |
| | | Z | 5.13 | 66.09 | 16.03 | | 130.0 | |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.09 | 66.45 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.85 | 66.75 | 16.57 | | 130.0 | |
| | | Z | 5.15 | 66.25 | 16.23 | | 130.0 | |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.08 | 66.53 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.83 | 66.78 | 16.59 | | 130.0 | |
| | | Z | 5.14 | 66.36 | 16.28 | | 130.0 | |

EX3DV4— SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|------|-------|-------|------|-------|-------------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle) | X | 4.96 | 66.05 | 15.99 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.74 | 66.39 | 16.22 | | 130.0 | |
| | | Z | 5.02 | 65.88 | 15.90 | | 130.0 | |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.16 | 66.32 | 16.20 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 4.91 | 66.60 | 16.40 | | 130.0 | |
| | | Z | 5.22 | 66.13 | 16.10 | | 130.0 | |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 5.25 | 66.46 | 16.34 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.01 | 66.87 | 16.61 | | 130.0 | |
| | | Z | 5.43 | 66.66 | 16.42 | | 130.0 | |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | X | 5.37 | 66.32 | 16.13 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.18 | 66.52 | 16.32 | | 130.0 | |
| | | Z | 5.41 | 66.14 | 16.02 | | 130.0 | |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 5.59 | 66.90 | 16.39 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.36 | 67.08 | 16.58 | | 130.0 | |
| | | Z | 5.64 | 66.75 | 16.30 | | 130.0 | |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.36 | 66.27 | 16.00 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.15 | 66.43 | 16.17 | | 130.0 | |
| | | Z | 5.41 | 66.15 | 15.92 | | 130.0 | |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | X | 5.46 | 66.45 | 16.06 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.33 | 66.94 | 16.43 | | 130.0 | |
| | | Z | 5.50 | 66.26 | 15.96 | | 130.0 | |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle) | X | 5.68 | 67.33 | 16.53 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.30 | 67.01 | 16.48 | | 130.0 | |
| | | Z | 5.83 | 67.48 | 16.58 | | 130.0 | |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | X | 5.68 | 67.46 | 16.80 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.39 | 67.46 | 16.91 | | 130.0 | |
| | | Z | 5.77 | 67.39 | 16.74 | | 130.0 | |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 5.60 | 67.13 | 16.65 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.50 | 67.73 | 17.05 | | 130.0 | |
| | | Z | 5.63 | 66.87 | 16.50 | | 130.0 | |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | X | 5.39 | 66.38 | 16.10 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.16 | 66.54 | 16.27 | | 130.0 | |
| | | Z | 5.48 | 66.37 | 16.07 | | 130.0 | |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | X | 5.42 | 66.59 | 16.25 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.22 | 66.83 | 16.48 | | 130.0 | |
| | | Z | 5.46 | 66.38 | 16.13 | | 130.0 | |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.26 | 65.75 | 15.53 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.03 | 65.88 | 15.68 | | 130.0 | |
| | | Z | 5.33 | 65.66 | 15.49 | | 130.0 | |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 5.80 | 66.66 | 16.21 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.64 | 66.80 | 16.37 | | 130.0 | |
| | | Z | 5.84 | 66.53 | 16.13 | | 130.0 | |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 5.91 | 66.96 | 16.34 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.72 | 67.05 | 16.49 | | 130.0 | |
| | | Z | 5.98 | 66.89 | 16.30 | | 130.0 | |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 5.94 | 67.02 | 16.35 | 0.46 | 130.0 | $\pm 9.6\%$ |
| | | Y | 5.77 | 67.21 | 16.55 | | 130.0 | |
| | | Z | 5.98 | 66.86 | 16.26 | | 130.0 | |

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|-----------|--|---|-------|-------|-------|-------|-------|---------|
| 10639-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 5.90 | 66.90 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.70 | 66.99 | 16.48 | | 130.0 | |
| | | Z | 5.95 | 66.78 | 16.26 | | 130.0 | |
| 10640-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 5.85 | 66.77 | 16.21 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.60 | 66.70 | 16.28 | | 130.0 | |
| | | Z | 5.94 | 66.77 | 16.19 | | 130.0 | |
| 10641-AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | X | 5.95 | 66.85 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.73 | 66.88 | 16.38 | | 130.0 | |
| | | Z | 6.01 | 66.77 | 16.22 | | 130.0 | |
| 10642-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 5.98 | 67.10 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.76 | 67.11 | 16.68 | | 130.0 | |
| | | Z | 6.04 | 66.98 | 16.50 | | 130.0 | |
| 10643-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 5.82 | 66.74 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.59 | 66.71 | 16.35 | | 130.0 | |
| | | Z | 5.88 | 66.67 | 16.23 | | 130.0 | |
| 10644-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 5.88 | 66.93 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.65 | 66.92 | 16.48 | | 130.0 | |
| | | Z | 5.97 | 66.96 | 16.39 | | 130.0 | |
| 10645-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.00 | 66.98 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.89 | 67.36 | 16.67 | | 130.0 | |
| | | Z | 6.11 | 67.04 | 16.40 | | 130.0 | |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | X | 10.64 | 95.54 | 31.22 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 4.79 | 84.10 | 28.76 | | 60.0 | |
| | | Z | 10.44 | 97.20 | 33.10 | | 60.0 | |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 9.38 | 93.52 | 30.68 | 9.30 | 60.0 | ± 9.6 % |
| | | Y | 4.24 | 81.79 | 27.97 | | 60.0 | |
| | | Z | 9.23 | 95.05 | 32.51 | | 60.0 | |
| 10648-AAA | CDMA2000 (1x Advanced) | X | 0.45 | 60.96 | 7.58 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.27 | 60.00 | 4.46 | | 150.0 | |
| | | Z | 0.46 | 60.51 | 7.45 | | 150.0 | |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | X | 3.44 | 66.86 | 15.90 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.11 | 67.55 | 15.78 | | 80.0 | |
| | | Z | 3.23 | 65.63 | 15.61 | | 80.0 | |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | X | 4.00 | 66.30 | 16.33 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.63 | 66.57 | 16.36 | | 80.0 | |
| | | Z | 3.80 | 65.27 | 16.02 | | 80.0 | |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.02 | 65.95 | 16.40 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.68 | 66.02 | 16.44 | | 80.0 | |
| | | Z | 3.82 | 64.96 | 16.07 | | 80.0 | |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.10 | 65.87 | 16.44 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 3.77 | 65.78 | 16.47 | | 80.0 | |
| | | Z | 3.89 | 64.93 | 16.12 | | 80.0 | |
| 10656-AAA | Pulse Waveform (200Hz, 10%) | X | 3.96 | 69.40 | 12.41 | 10.00 | 50.0 | ± 9.6 % |
| | | Y | 3.54 | 68.64 | 11.84 | | 50.0 | |
| | | Z | 6.60 | 76.50 | 15.95 | | 50.0 | |
| 10659-AAA | Pulse Waveform (200Hz, 20%) | X | 3.35 | 69.24 | 11.38 | 6.99 | 60.0 | ± 9.6 % |
| | | Y | 2.54 | 68.41 | 10.67 | | 60.0 | |
| | | Z | 15.62 | 86.85 | 17.81 | | 60.0 | |



FCC ID: A3LSMM305F

Report No: HCT-SR-1901-FC004-R1

EX3DV4- SN:3863

April 25, 2018

| | | | | | | | | |
|---------------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| 10660- AAA | Pulse Waveform (200Hz, 40%) | X | 3.13 | 70.75 | 10.92 | 3.98 | 80.0 | ± 9.6 % |
| | | Y | 2.65 | 71.33 | 10.38 | | 80.0 | |
| | | Z | 100.00 | 100.70 | 18.97 | | 80.0 | |
| 10661- AAA | Pulse Waveform (200Hz, 60%) | X | 3.01 | 72.21 | 10.50 | 2.22 | 100.0 | ± 9.6 % |
| | | Y | 0.47 | 62.70 | 6.02 | | 100.0 | |
| | | Z | 0.86 | 65.62 | 7.78 | | 100.0 | |
| 10662- AAA | Pulse Waveform (200Hz, 80%) | X | 0.23 | 60.01 | 4.55 | 0.97 | 120.0 | ± 9.6 % |
| | | Y | 0.53 | 60.44 | 2.25 | | 120.0 | |
| | | Z | 0.27 | 60.00 | 2.59 | | 120.0 | |

^a Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.