

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024


Page (33) of (49)




20M BW / QPSK / Low ch. / 1RB

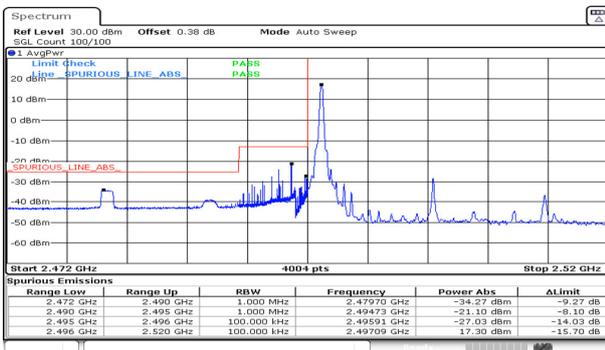


20M BW / QPSK / High ch. / 1RB

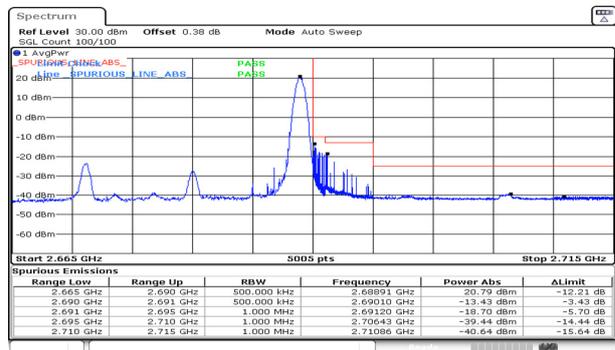


20M BW / QPSK / Low ch. / FRB

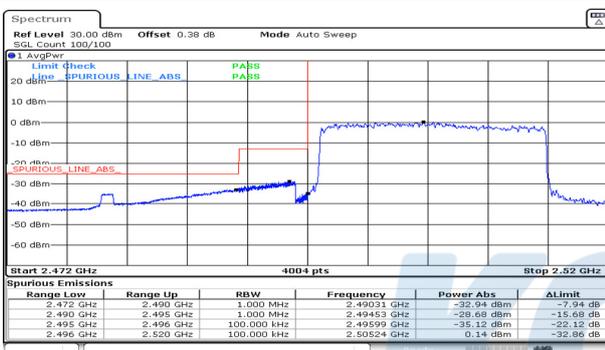


20M BW / QPSK / High ch. / FRB

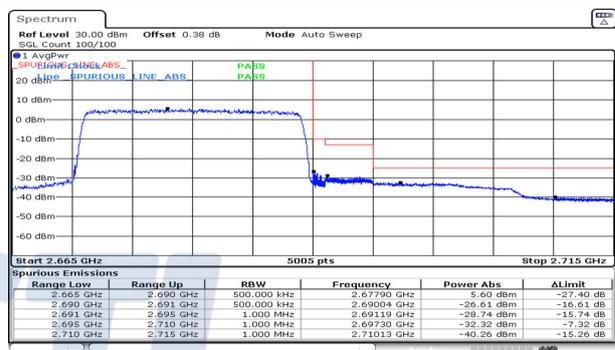


20M BW / 16QAM / Low ch. / 1RB

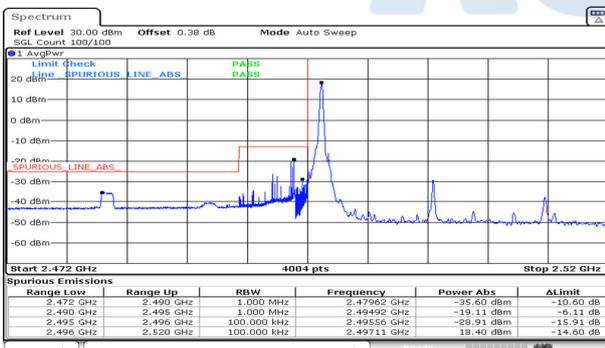


20M BW / 16QAM / High ch. / 1RB

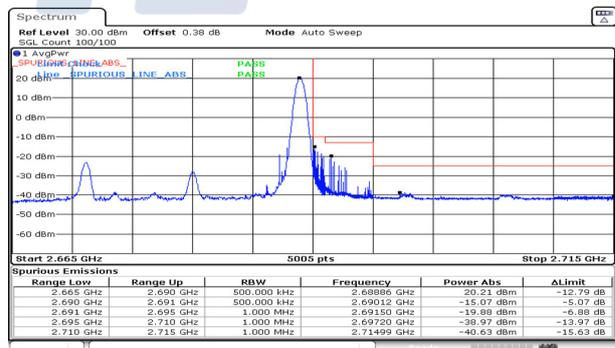

20M BW / 16QAM / Low ch. / FRB

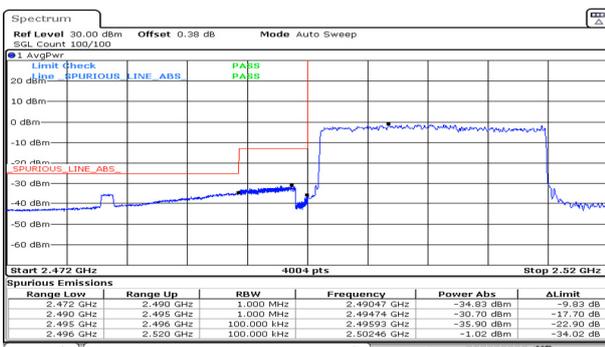


20M BW / 16QAM / High ch. / FRB

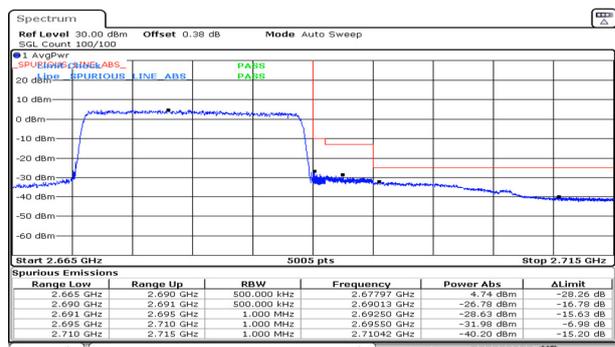

This test report shall not be reproduced, except in full, without the written approval

7.5. Peak to Average Power Ratio (PAPR)

Test setup

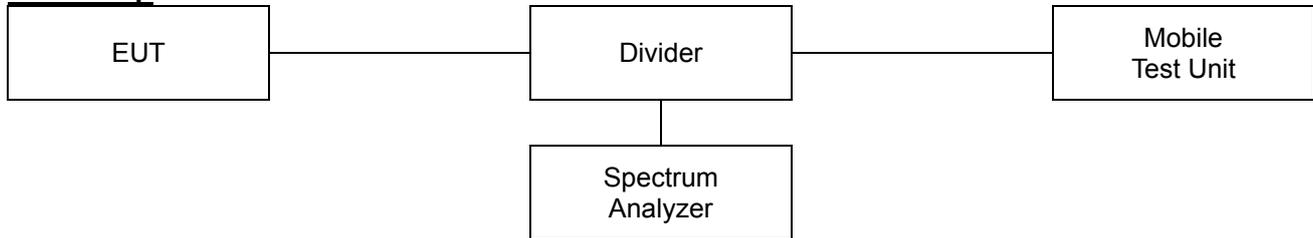

Limit

According to §27.50(d)(5), the peak-to-average ratio(PAR) of the transmission must not exceed 13 dB.

Test procedure

971168 D01 v03r01 - Section 5.7.2

ANSI 63.26-2015 – Section 5.2.3.4

Test settings

5.2.3.4 Measurement of peak power in a broadband noise-like signal using CCDF

- 1) Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth
- 2) Set the number of counts to a value that stabilizes the measured CCDF curve.
- 3) Set the measurement interval as follows:
 - a) For continuous transmissions, set to the greater of [10 x (number of points in sweep) x (transmission symbol period)] or 1 ms.
 - b) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - c) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- 4) Record the maximum PAPR level associated with a probability of 0.1%

5.2.6 Peak-to-average power ratio


Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{PK} .

Use one of the applicable procedure presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{AG} . Determine the P.A.P.R from:

$$PAPR(\text{dB}) = P_{PK}(\text{dBm or dBW}) - P_{AG}(\text{dBm or dBW})$$

Test results

Test mode: LTE Band 41

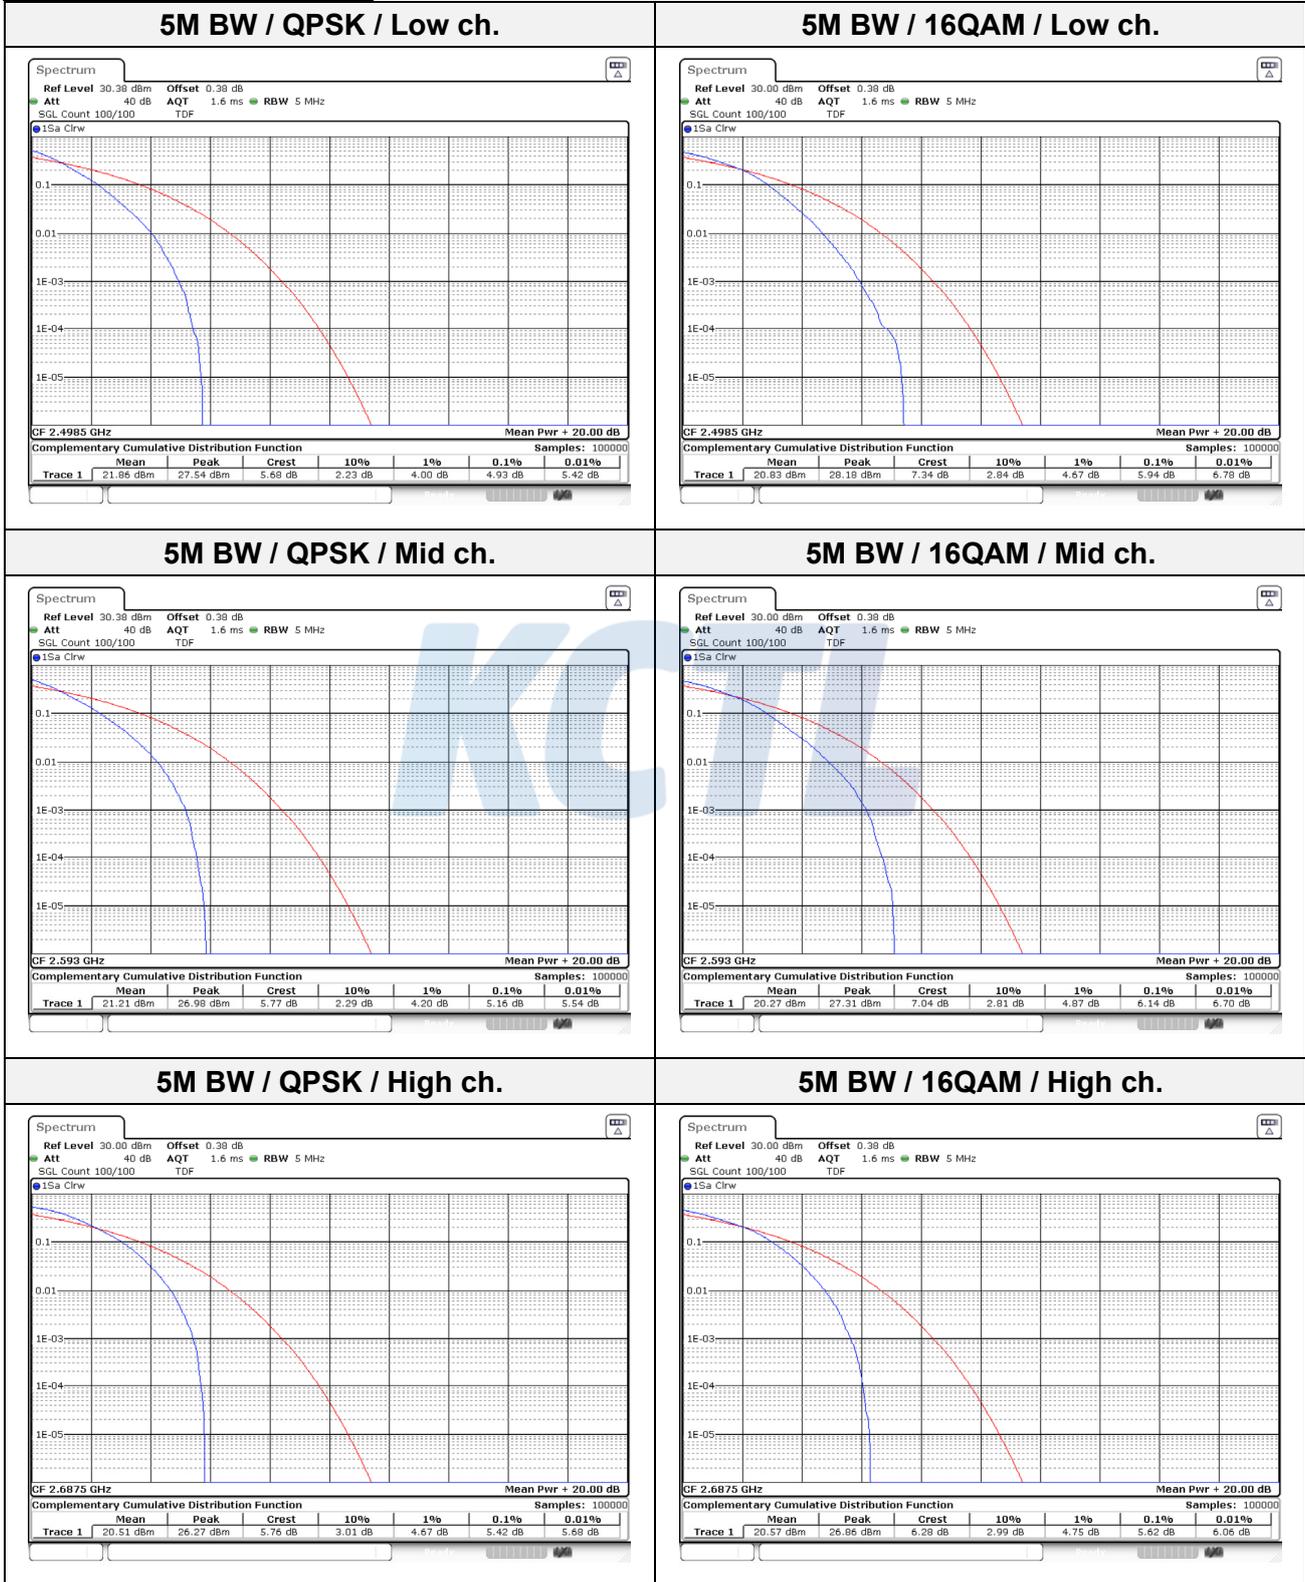

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024


Page (36) of (49)




10M BW / QPSK / Low ch.

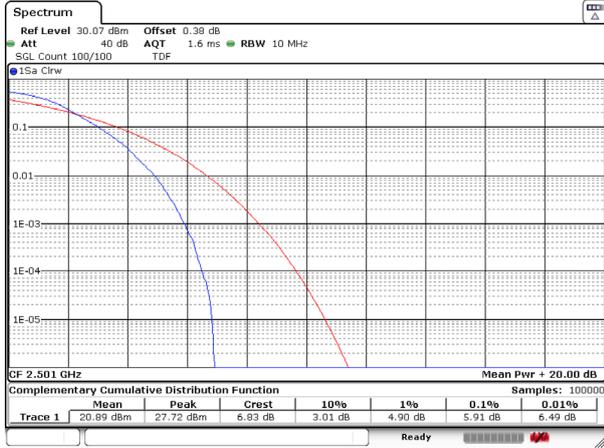


10M BW / 16QAM / Low ch.

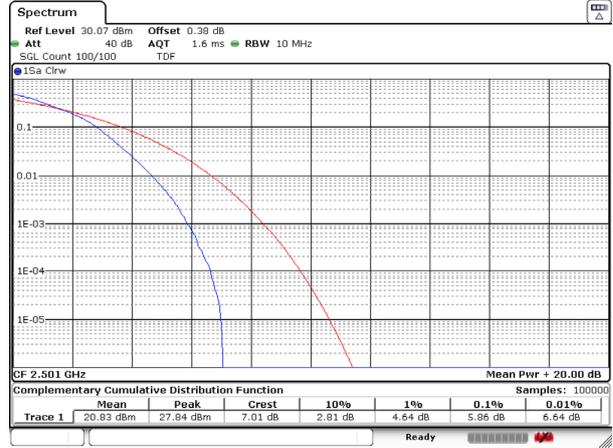


10M BW / QPSK / Mid ch.

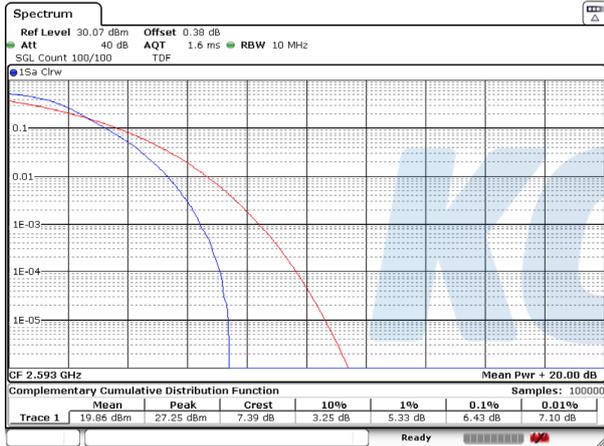


10M BW / 16QAM / Mid ch.

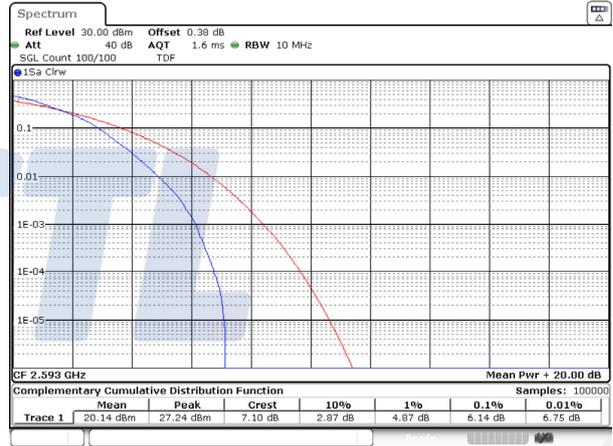

10M BW / QPSK / High ch.

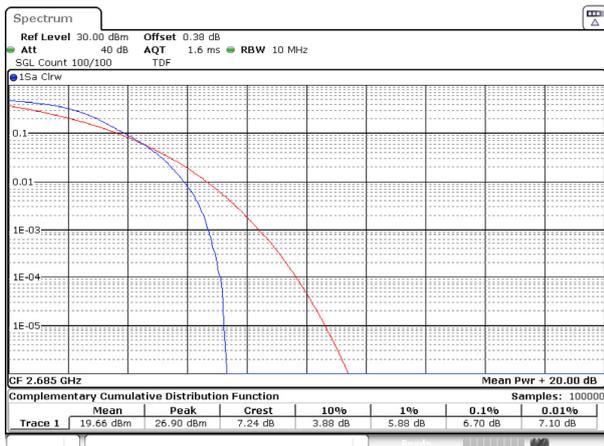

10M BW / 16QAM / High ch.

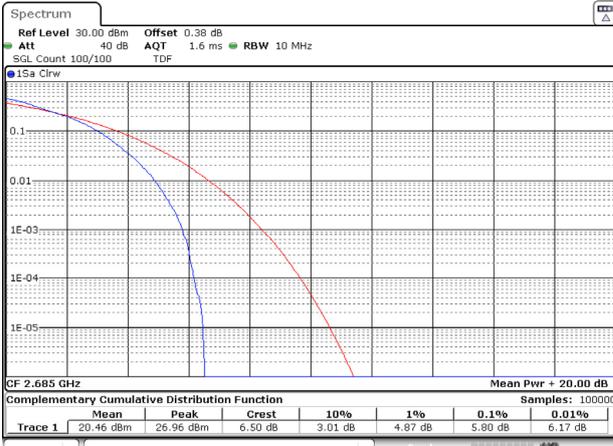

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024


Page (37) of (49)




15M BW / QPSK / Low ch.

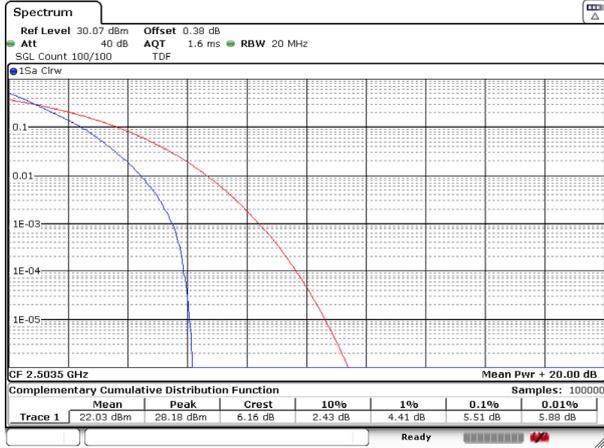


15M BW / 16QAM / Low ch.

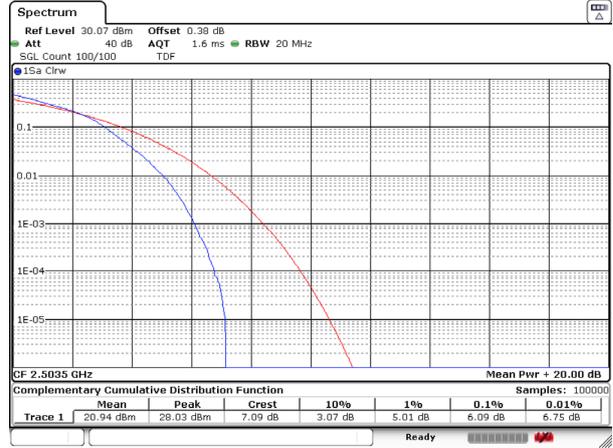


15M BW / QPSK / Mid ch.

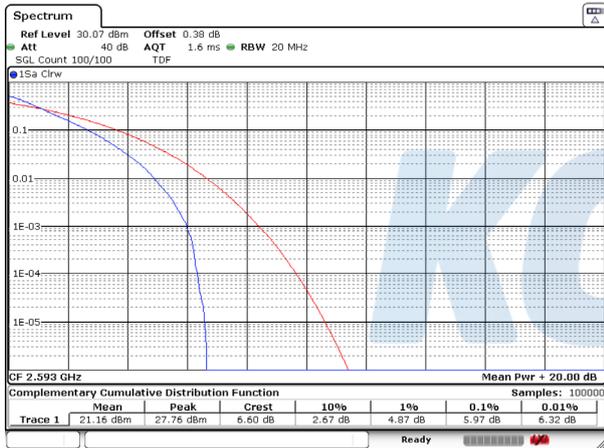


15M BW / 16QAM / Mid ch.

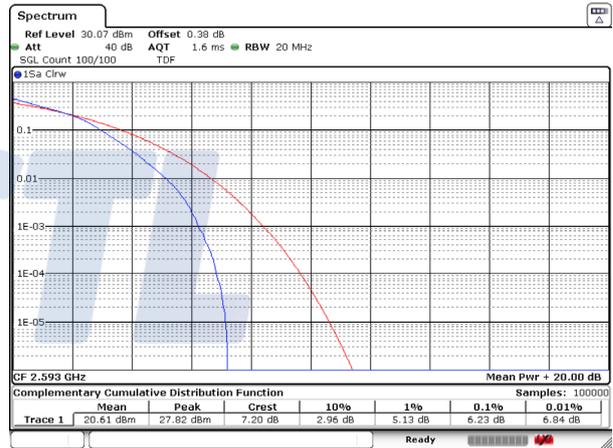


15M BW / QPSK / High ch.

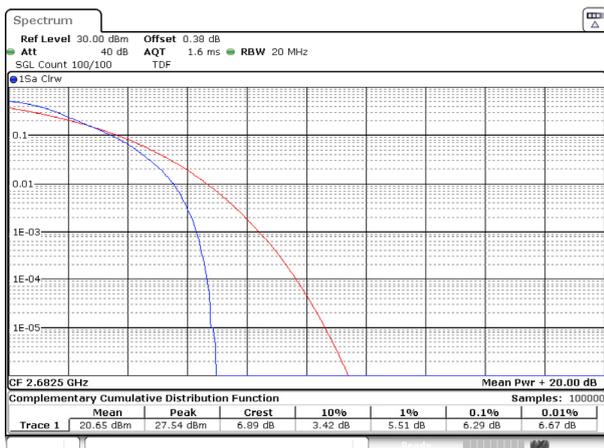


15M BW / 16QAM / High ch.

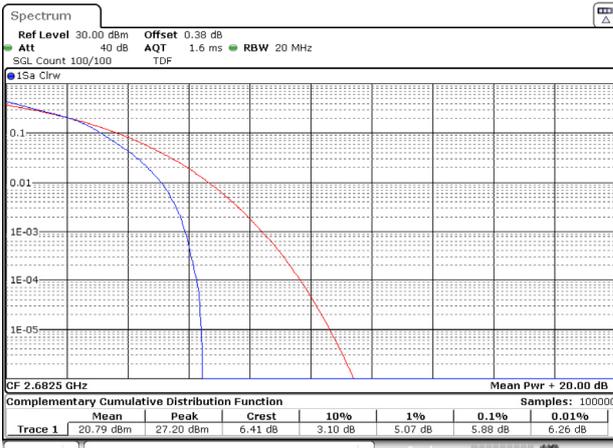


20M BW / QPSK / Low ch.

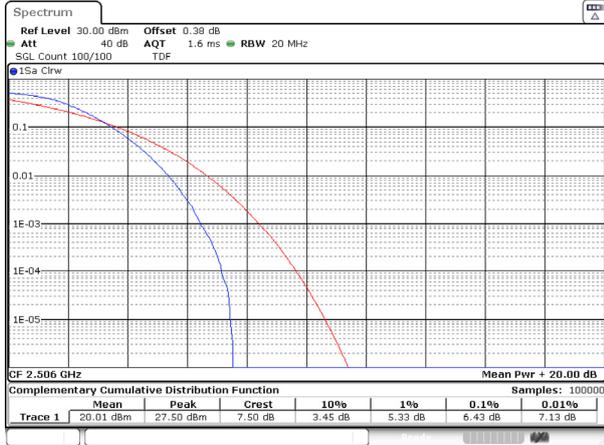


20M BW / 16QAM / Low ch.

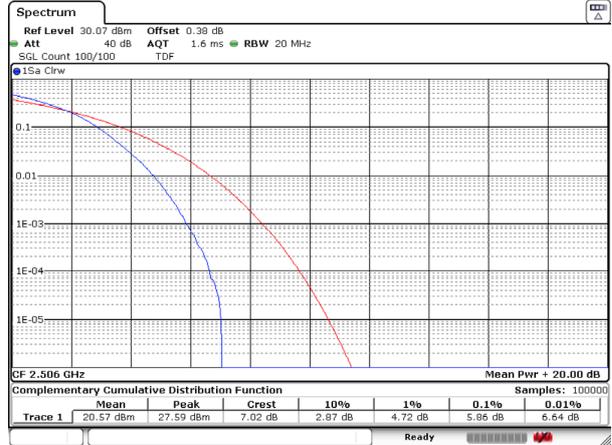


20M BW / QPSK / Mid ch.

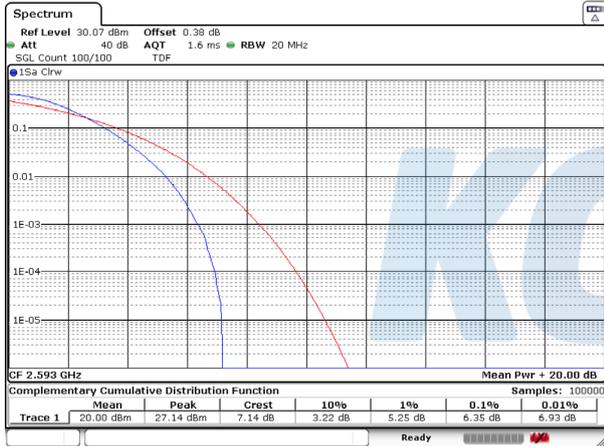


20M BW / 16QAM / Mid ch.

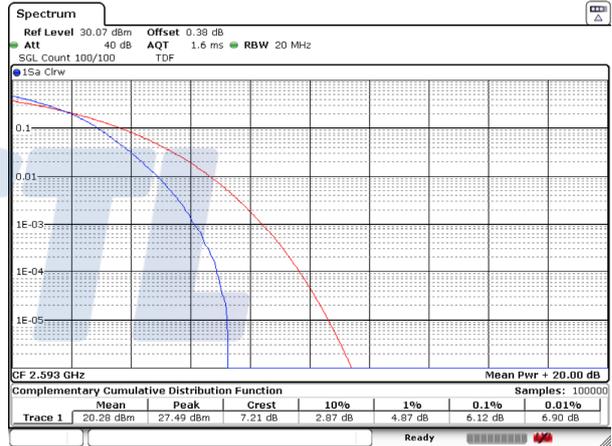

20M BW / QPSK / High ch.

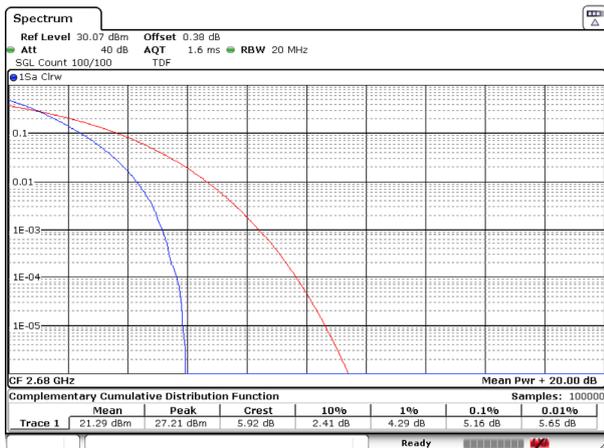


20M BW / 16QAM / High ch.

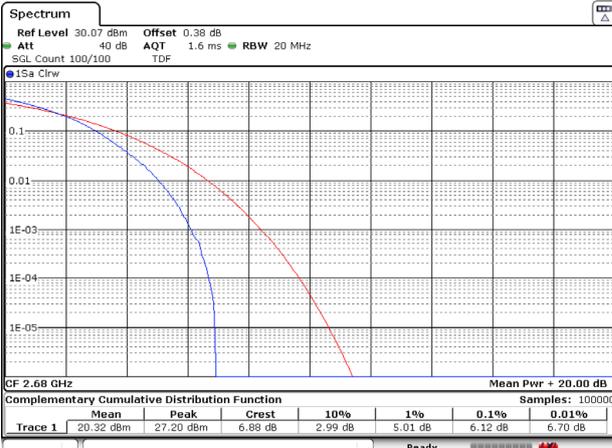

7.6. Frequency stability

Test setup

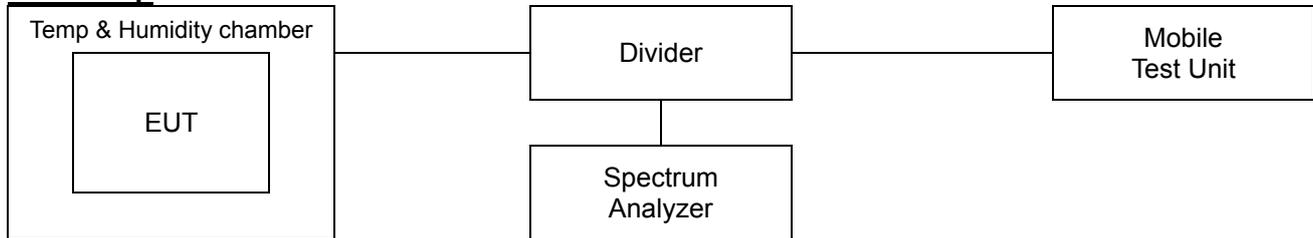

Limit

According to §2.1055(a),

The frequency stability shall be measured with variation of ambient temperature as follows:

- 1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.
- 2) From -20° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the maritime services under part 80 of this chapter, except for class A, B, and S emergency position indicating radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the local television transmission service and point-to-point microwave radio service under part 21 of this chapter, equipment licensed for use aboard aircraft in the aviation services under part 87 of this chapter, and equipment authorized for use in the family radio service under part 95 of this chapter.
- 3) From 0° to $+50^{\circ}$ centigrade for equipment to be licensed for use in the radio broadcast Services under part 73 of this chapter.

According to §2.1055(d),

The frequency stability shall be measured with variation of primary supply Voltage as follows:

- 1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- 2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating and point which shall be specified by the manufacturer.
- 3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

According to §27.54,

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the Authorized bands of operation.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024

Page (40) of (49)

KCTL**Test procedure**

ANSI 63.26-2015 – Section 5.6

Test settings


- 1) The carrier frequency of the transmitter is measured at room temperature.
(20°C to provide a reference)
- 2) The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3) Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each Temperature level.

KCTL

Test results


Test mode : LTE Band 41
 Frequency (Hz) : 2 593 000 000
 Channel : 40620
 Deviation limit : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized bands of operation

Voltage (%)	Power (V)	Temp. (°C)	Frequency (Hz)	Frequency error (Hz)	Deviation	
					(ppm)	(%)
100%	3.85	+22(Ref)	2,593,000,001	0.70	0.0	0.000000
		-30	2,593,000,011	11.34	0.0	0.000000
		-20	2,593,000,010	9.91	0.0	0.000000
		-10	2,593,000,008	8.20	0.0	0.000000
		0	2,593,000,008	7.55	0.0	0.000000
		+10	2,593,000,005	5.41	0.0	0.000000
		+20	2,593,000,003	2.93	0.0	0.000000
		+30	2,593,000,001	0.89	0.0	0.000000
		+40	2,593,000,001	1.15	0.0	0.000000
		+50	2,593,000,001	1.37	0.0	0.000000
115%	4.43	+22	2,593,000,002	1.57	0.0	0.000000
End point	2.55	+22	2,593,000,002	2.33	0.0	0.000000

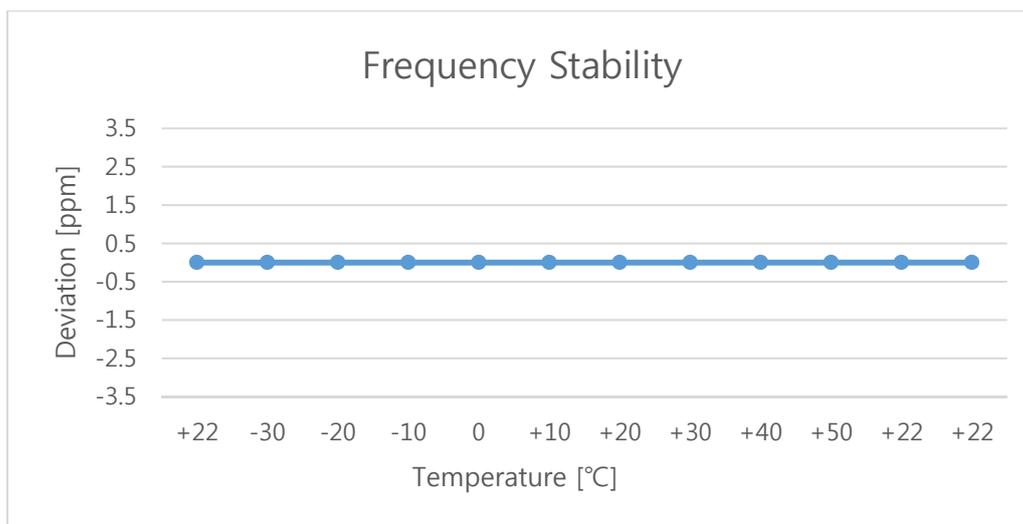


7.7. Radiated Power (ERP/EIRP)**Test setup**


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

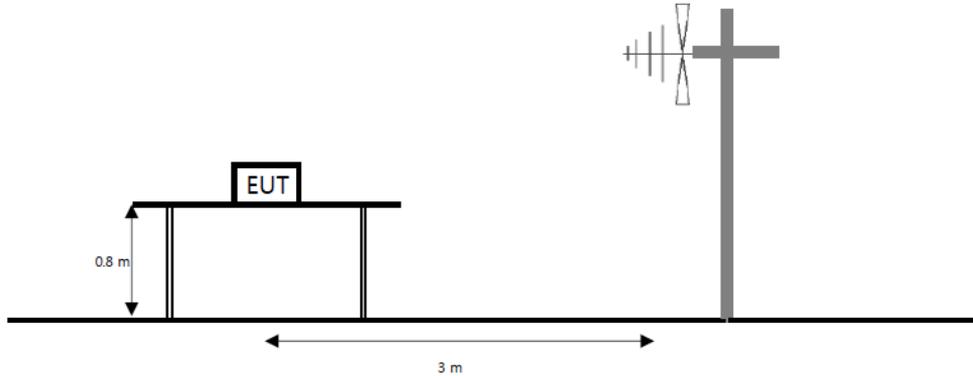

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

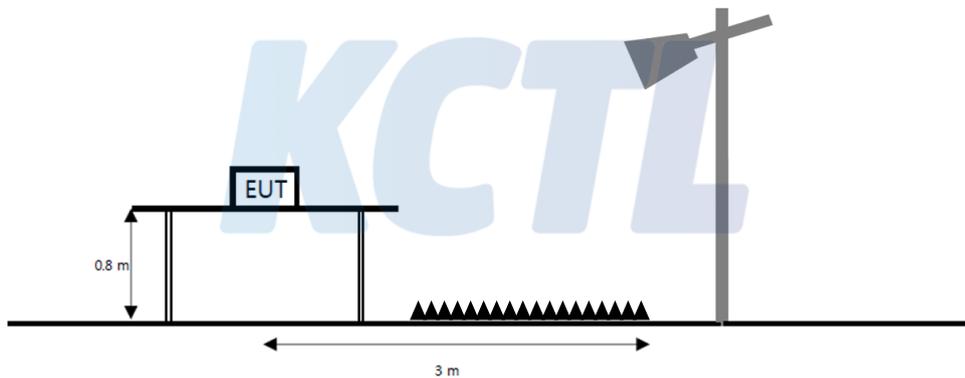

The diagram below shows the test setup for substituted method.

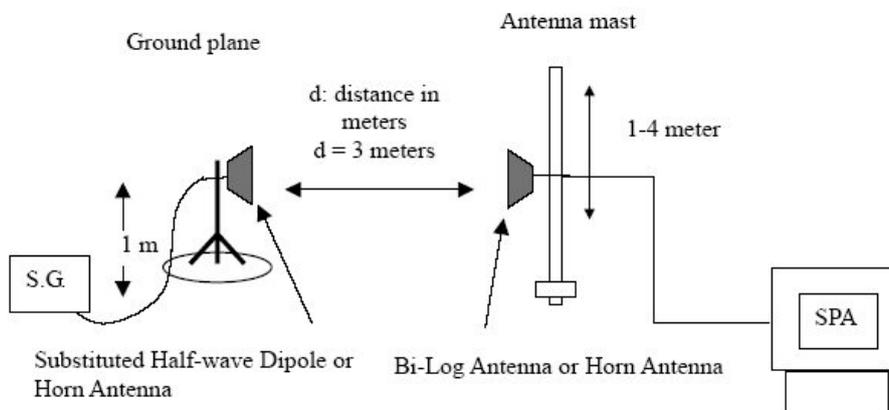

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024

Page (43) of (49)

**Limit**

According to §27.50(h)(2), Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test procedure

971168 D01 v03r01 - Section 5.2 and 5.8, 412172 D01 v01r01

ANSI 63.26-2015 – Section 5.2

ANSI/TIA-603-E-2016 - Section 2.2.17

Test settings

- 1) RBW = 1 % to 5 % of the OBW.
- 2) VBW $\geq 3 \times$ RBW.
- 3) SPAN = 2 \times to 3 \times the OBW.
- 4) Number of measurement points in sweep $\geq 2 \times$ span / RBW.
- 5) Sweep time :
 - 1) Auto couple, or
 - 2) $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
- 6) Detector = RMS
- 7) If the EUT can be configured to transmit continuously, then set the trigger to free run.
- 8) If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
- 9) Trace mode = trace averaging (RMS) over 100 sweeps.
- 10) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- 11) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close To normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to Correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the Level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
The power is calculated by the following formula;
$$Pd(\text{dBm}) = Pg(\text{dBm}) - \text{Cable loss (dB)} + \text{Antenna gain (dB)}$$

Note. Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that The maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level Detected by the measuring corrected for the change of input attenuator setting of the measuring Receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for Any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna Orientated for horizontal polarization.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024

Page (45) of (49)

**Test results****Test mode: LTE Band 41**

Bandwidth	Modulation	Frequency	Pol.	Antenna Gain	C.L	Substitute Level	EIRP	
		[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[W]
5 M	QPSK	2 498.5	H	6.00	6.62	22.51	21.89	0.155
		2 593.0	H	6.13	6.78	24.51	23.86	0.243
		2 687.5	H	6.26	6.92	21.76	21.10	0.129
	16QAM	2 498.5	H	6.00	6.62	21.79	21.17	0.131
		2 593.0	H	6.13	6.78	23.08	22.43	0.175
		2 687.5	H	6.26	6.92	20.55	19.89	0.097
10 M	QPSK	2 501.0	H	6.70	8.88	24.81	22.63	0.183
		2 593.0	H	6.66	9.01	23.36	21.01	0.126
		2 685.0	H	6.63	9.24	22.75	20.14	0.103
	16QAM	2 501.0	H	6.70	8.88	23.60	21.42	0.139
		2 593.0	H	6.66	9.01	21.66	19.31	0.085
		2 685.0	H	6.63	9.24	22.24	19.63	0.092
15 M	QPSK	2 503.5	H	6.70	8.87	25.42	23.25	0.211
		2 593.0	H	6.66	9.01	23.91	21.56	0.143
		2 682.5	H	6.63	9.23	25.03	22.43	0.175
	16QAM	2 503.5	H	6.70	8.87	23.81	21.64	0.146
		2 593.0	H	6.66	9.01	22.80	20.45	0.111
		2 682.5	H	6.63	9.23	24.43	21.83	0.152
20 M	QPSK	2 506.0	H	6.70	8.89	25.16	22.97	0.198
		2 593.0	H	6.66	9.01	25.85	23.50	0.224
		2 680.0	H	6.63	9.23	23.19	20.59	0.115
	16QAM	2 506.0	H	6.70	8.89	24.61	22.42	0.175
		2 593.0	H	6.66	9.01	23.57	21.22	0.132
		2 680.0	H	6.63	9.23	20.90	18.30	0.068


Note.

1. E.R.P & E.I.R.P(dBm) = Substitute Level(dB) + Antenna gain(dBi) - C.L(Cable loss) (dB)


7.8. Radiated Spurious Emissions

Test setup


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

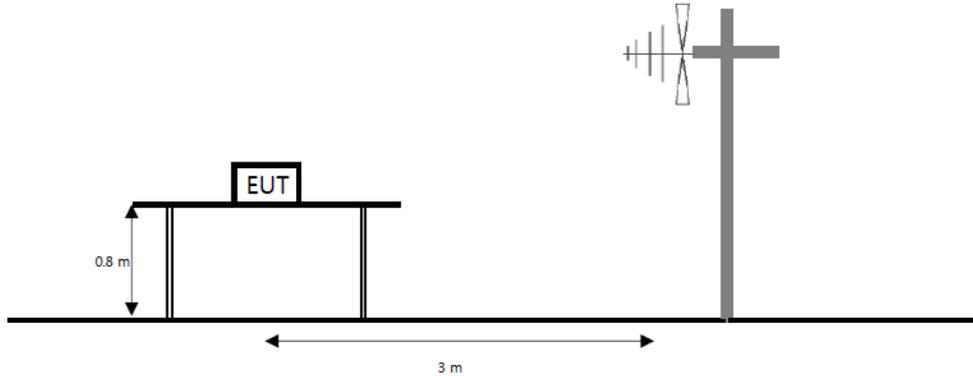

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

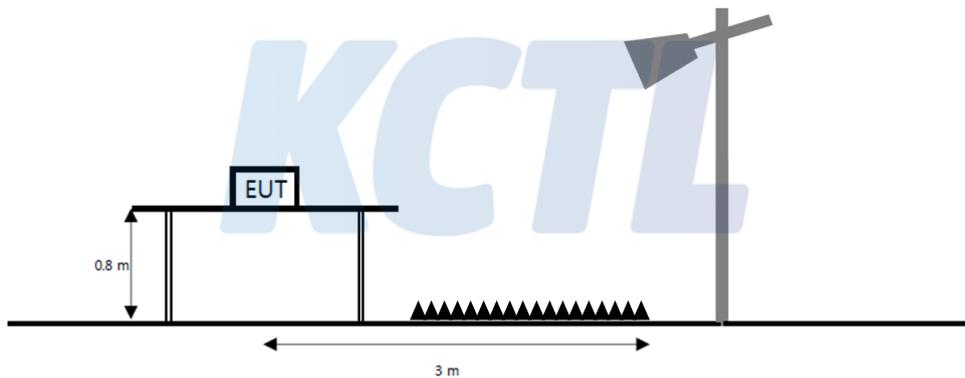

The diagram below shows the test setup for substituted method.

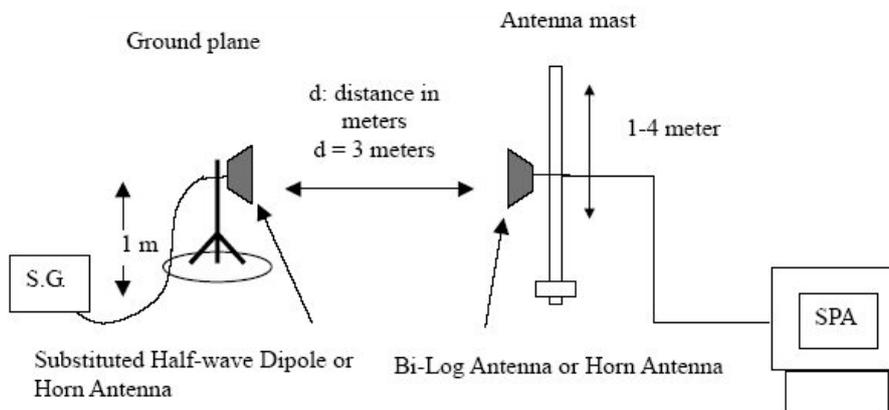

Limit

According to §27.53(m)(4), the minimum permissible attenuation level of any spurious emission is $53 + 10\log(P_{\text{[Watts]}})$ dB.

Test procedure

971168 D01 v03r01 - Section 6.2

ANSI 63.26-2015 – Section 5.5

ANSI/TIA-603-E-2016 - Section 2.2.12

Test settings

- 1) RBW = 1 kHz for below 1 GHz and 1 MHz for above 1 GHz.
- 2) VBW $\geq 3 \times$ RBW.
- 3) Detector = RMS
- 4) Trace mode = Max hold
- 5) Sweep time = Auto couple
- 6) Number of sweep points $\geq 2 \times$ span / RBW
- 7) Allow trace to fully stabilize.

Notes:

1. On a test site, the EUT shall be placed at 80 cm height on a turn table, and in the position close to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3 m from EUT to correspond to the fundamental frequency of the transmitter.
3. The turntable is rotated through 360°, and the receiving antenna scans in order to determine the level of the maximized emission.
4. The test antenna shall be raised and lowered again through the specified range of height until the maximum signal level is detected by the measuring receiver.
5. The maximum signal level detected by the measuring receiver shall be noted.
6. The EUT was replaced by half-wave dipole (1 GHz below) or horn antenna (1 GHz above) connected to a signal generator.
7. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
8. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring corrected for the change of input attenuator setting of the measuring receiver.
9. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
10. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024

Page (48) of (49)

**Test results (Above 1 000 MHz)**

Test mode : LTE Band 41

Frequency(MHz) : 2 498.5

Channel : 39675

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	4 992.50	V	9.89	9.51	-45.88	-45.50	-25.00	20.50
	7 489.00	V	11.98	11.70	-50.88	-50.60	-25.00	25.60
	9 985.50	V	12.71	13.70	-48.81	-49.80	-25.00	24.80
	12 481.00	H	13.28	15.36	-48.22	-50.30	-25.00	25.30

Test mode : LTE Band 41

Frequency(MHz) : 2 593.0

Channel : 40620

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	5 181.50	V	10.15	9.71	-44.74	-44.30	-25.00	19.30
	7 772.50	V	12.27	11.97	-43.00	-42.70	-25.00	17.70
	10 363.50	V	12.85	13.92	-42.43	-43.50	-25.00	18.50
	12 954.50	H	13.66	15.64	-40.52	-42.50	-25.00	17.50

Test mode : LTE Band 41

Frequency(MHz) : 2 687.5

Channel : 41565

Bandwidth(MHz) : 5

Mode	Frequency	Pol.	Antenna Gain	Cable loss	Substitute Level	Level	Limit	Margin
	[MHz]	[V/H]	[dBi]	[dB]	[dBm]	[dBm]	[dBm]	[dB]
QPSK	5 375.00	V	10.43	9.90	-53.23	-52.70	-25.00	27.70
	8 063.00	H	12.56	12.36	-44.80	-44.60	-25.00	19.60
	10 751.00	V	12.90	14.23	-44.57	-45.90	-25.00	20.90
	13 438.50	H	13.79	15.94	-44.15	-46.30	-25.00	21.30

Note.

1. Limit Calculation(dBm)= 55 + 10log(P_[Watts])

2. ERP & E.I.R.P(dB m)= Substitute Level(dB) + Antenna gain(dBi) – Cable Loss(dB)

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0024

Page (49) of (49)



8. Measurement equipment

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100808	20.07.30
Spectrum Analyzer	R&S	FSV30	100806	20.07.30
Spectrum Analyzer	AGILENT	N9040B	MY57010132	20.07.31
Vector Signal Generator	R&S	SMBV100A	257566	20.07.16
Signal Generator	R&S	SMR40	100007	20.05.13
Signal Generator	R&S	SMB100A	176206	21.01.21*
Wideband Radio Communication Tester	R&S	CMW500	141780	20.04.18
Wideband Radio Communication Tester	R&S	CMW500	137524	20.07.17
DC Power Supply	AGILENT	E3632A	MY40001543	20.05.13
DC Power Supply	AGILENT	E3632A	MY40018781	20.05.13
Power Divider	AGILENT	11636B	54456	21.01.06
Power Divider	Aeroflex/Weinschel, Inc.	1580-1	RZ184	21.01.06
Temp & Humid Chamber	ESPEC CORP.	SH-661	92004048	21.01.03
Biconical VHF-UHF Broadband Antenna	SCHWARZBECK	VUBA9117	275	20.04.13
Bilog Antenna	Teseq GmbH	CBL 6143A	35039	21.05.21
Horn Antenna	ETS.lindgren	3115	62589	20.05.09
Horn Antenna	ETS.lindgren	3117	161225	20.05.22
Horn Antenna	ETS.lindgren	3116	00086632	20.02.15
Horn Antenna	ETS.lindgren	3116	00086635	20.05.09
High pass Filter	Wainwright Instruments GmbH	WHKX3.0/18G-12SS	44	21.01.21*
High pass Filter	Wainwright Instruments GmbH	WHKX1.0/1.5S-10SS	14	21.01.21*
Attenuator	Weinschel ENGINEERING	10	AJ1239	20.05.14
Attenuator	API Inmet	40AH2W-10	12	20.05.15
Amplifier	SONOMA INSTRUMENT	310N	186280	20.04.04
Amplifier	L-3 Narda-MITEQ	AMF-7D-01001800-22-10P	2031196	20.02.21
Amplifier	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000997	20.08.01
Antenna Mast	MATURO	EAS 1.5	042/8941211	N/A
Antenna Mast	MATURO	EAS 1.5	043/8941211	N/A
Turn Table	MATURO	TT 0.8 PF	041/8941211	N/A

*The equipment was used after finished calibration.

End of test report

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2