

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
August 19, 2021

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2108-FC015

FCC ID: A3LSMM526B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-M526B/DS
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §24, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band2 (1.4)	1850.7 - 1909.3	1M09G7D	QPSK	0.186	22.69
		1M09W7D	16QAM	0.161	22.08
		1M09W7D	64QAM	0.126	21.02
LTE – Band2 (3)	1851.5 - 1908.5	2M71G7D	QPSK	0.191	22.82
		2M70W7D	16QAM	0.165	22.17
		2M70W7D	64QAM	0.128	21.07
LTE – Band2 (5)	1852.5 - 1907.5	4M51G7D	QPSK	0.194	22.87
		4M49W7D	16QAM	0.168	22.25
		4M51W7D	64QAM	0.127	21.05
LTE – Band2 (10)	1855.0 - 1905.0	8M97G7D	QPSK	0.200	23.02
		8M99W7D	16QAM	0.175	22.42
		8M98W7D	64QAM	0.134	21.26
LTE – Band2 (15)	1857.5 - 1902.5	13M5G7D	QPSK	0.187	22.71
		13M5W7D	16QAM	0.161	22.07
		13M5W7D	64QAM	0.124	20.95
LTE – Band2 (20)	1860.0 - 1900.0	18M0G7D	QPSK	0.194	22.88
		17M9W7D	16QAM	0.166	22.21
		17M9W7D	64QAM	0.127	21.03

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2108-FC015

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2108-FC015	August 19, 2021	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(RADIATED TEST)	16
3.10 WORST CASE(CONDUCTED TEST)	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	21
8. TEST DATA	23
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	23
8.2 RADIATED SPURIOUS EMISSIONS	26
8.3 PEAK-TO-AVERAGE RATIO.....	27
8.4 OCCUPIED BANDWIDTH	28
8.5 CONDUCTED SPURIOUS EMISSIONS	29
8.6 BAND EDGE	29
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	30
9. TEST PLOTS.....	48
10. APPENDIX A_ TEST SETUP PHOTO	157

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMM526B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§24, §2
EUT Type:	Mobile phone
Model(s):	SM-M526B/DS
Tx Frequency:	1850.7 MHz – 1909.3 MHz (LTE – Band2 (1.4 MHz)) 1851.5 MHz – 1908.5 MHz (LTE – Band2 (3 MHz)) 1852.5 MHz – 1907.5 MHz (LTE – Band2 (5 MHz)) 1855.0 MHz – 1905.0 MHz (LTE – Band2 (10 MHz)) 1857.5 MHz – 1902.5 MHz (LTE – Band2 (15 MHz)) 1860.0 MHz – 1900.0 MHz (LTE – Band2 (20 MHz))
Date(s) of Tests:	July 19, 2021 ~ August 17, 2021
Serial number:	Radiated: R3CR41328YL Conducted: R3CR60JBG9Z

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (HT20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

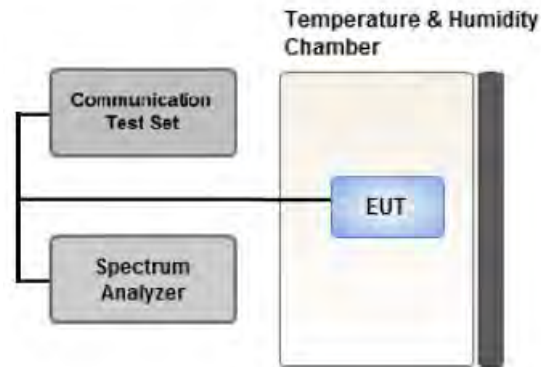

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.



Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL



Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.7 BAND EDGE

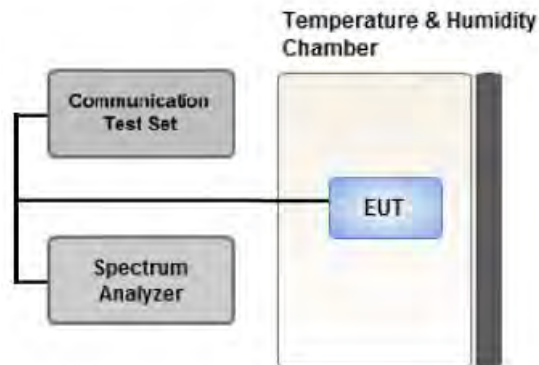

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE



Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
(In the case of radiated spurious emissions, only the B.W result that confirmed the maximum radiated power was reported.)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15 G-10EF)/H.P.F	-	03/02/2021	Annual	03/02/2022
T&M SYSTEM	FBSR-02B(WHK3.3/18 G-10EF)/H.P.F	-	03/02/2021	Annual	03/02/2022
Hewlett Packard	11667B / Power Splitter(DC ~ 26.5 GHz)	11275	04/07/2021	Annual	04/07/2022
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP/ Dipole Antenna	557	04/05/2021	Biennial	04/05/2023
Schwarzbeck	UHAP/ Dipole Antenna	558	04/05/2021	Biennial	04/05/2023
ESPEC	SU-642 / Chamber	93008124	03/15/2021	Annual	03/15/2022
Schwarzbeck	BBHA 9120D/ Horn Antenna(1 ~ 18 GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1 ~ 18 GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15 ~ 40 GHz)	BBHA9170342	10/13/2020	Biennial	10/13/2022
Schwarzbeck	BBHA 9170/ Horn Antenna(15 ~ 40 GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10 Hz ~ 26.5 GHz)	MY50200093	11/17/2020	Annual	11/17/2021
Hewlett Packard	8493C/ATTENUATOR(20 dB)	17280	06/01/2021	Annual	06/01/2022
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10 Hz ~ 40 GHz)	100931	10/14/2020	Annual	10/14/2021
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/26/2020	Annual	08/26/2021
Schwarzbeck	FMZB1513/ Loop Antenna(9 kHz ~ 30 MHz)	1513-333	03/19/2020	Biennial	03/19/2022
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/03/2021	Biennial	03/03/2023
Schwarzbeck	VULB9168/ Hybrid Antenna	760	02/22/2021	Biennial	02/22/2023
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/12/2021	Annual	07/12/2022
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/07/2021	Annual	01/07/2022
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100 kHz ~ 40 GHz)	177633	07/05/2021	Annual	07/05/2022
KEYSIGHT	N9030B / Signal Analyzer(5 Hz ~ 40.0 GHz)	MY55480167	06/02/2021	Annual	06/02/2022
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1850.7	LTE B2/ 1.4 MHz	QPSK	-19.38	14.70	10.10	2.11	V	< 2.00	0.186	22.69
		16-QAM	-19.99	14.09	10.10	2.11	V		0.161	22.08
		64-QAM	-21.05	13.03	10.10	2.11	V		0.126	21.02
1880.0		QPSK	-19.91	14.64	10.15	2.15	V		0.184	22.64
		16-QAM	-20.54	14.01	10.15	2.15	V		0.159	22.01
		64-QAM	-21.60	12.95	10.15	2.15	V		0.124	20.95
1909.3		QPSK	-20.39	14.15	10.23	2.15	V		0.167	22.23
		16-QAM	-21.06	13.48	10.23	2.15	V		0.143	21.56
		64-QAM	-22.08	12.46	10.23	2.15	V		0.113	20.54

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
									W	W
1851.5	LTE B2/ 3 MHz	QPSK	-19.25	14.83	10.10	2.11	V	< 2.00	0.191	22.82
		16-QAM	-19.92	14.16	10.10	2.11	V		0.164	22.15
		64-QAM	-21.00	13.08	10.10	2.11	V		0.128	21.07
1880.0		QPSK	-19.74	14.81	10.15	2.15	V		0.191	22.81
		16-QAM	-20.38	14.17	10.15	2.15	V		0.165	22.17
		64-QAM	-21.48	13.07	10.15	2.15	V		0.128	21.07
1908.5		QPSK	-20.22	14.32	10.23	2.15	V		0.174	22.40
		16-QAM	-20.85	13.69	10.23	2.15	V		0.150	21.77
		64-QAM	-21.94	12.60	10.23	2.15	V		0.117	20.68

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1852.5	LTE B2/ 5 MHz	QPSK	-19.35	14.73	10.10	2.11	V	< 2.00	0.187	22.72
		16-QAM	-20.10	13.98	10.10	2.11	V		0.157	21.97
		64-QAM	-21.10	12.98	10.10	2.11	V		0.125	20.97
1880.0		QPSK	-19.68	14.87	10.15	2.15	V		0.194	22.87
		16-QAM	-20.30	14.25	10.15	2.15	V		0.168	22.25
		64-QAM	-21.50	13.05	10.15	2.15	V		0.127	21.05
1907.5		QPSK	-20.24	14.30	10.23	2.15	V		0.173	22.38
		16-QAM	-20.90	13.64	10.23	2.15	V		0.149	21.72
		64-QAM	-22.03	12.51	10.23	2.15	V		0.115	20.59

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1855.0	LTE B2/ 10 MHz	QPSK	-19.42	14.73	10.12	2.12	V	< 2.00	0.187	22.73
		16-QAM	-20.00	14.15	10.12	2.12	V		0.164	22.15
		64-QAM	-21.09	13.06	10.12	2.12	V		0.127	21.06
1880.0		QPSK	-19.53	15.02	10.15	2.15	V		0.200	23.02
		16-QAM	-20.13	14.42	10.15	2.15	V		0.175	22.42
		64-QAM	-21.29	13.26	10.15	2.15	V		0.134	21.26
1905.0		QPSK	-20.17	14.49	10.22	2.15	V		0.180	22.56
		16-QAM	-20.77	13.89	10.22	2.15	V		0.157	21.96
		64-QAM	-21.94	12.72	10.22	2.15	V		0.120	20.79

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1857.5	LTE B2/ 15 MHz	QPSK	-19.56	14.65	10.13	2.12	V	< 2.00	0.185	22.66
		16-QAM	-20.19	14.02	10.13	2.12	V		0.160	22.03
		64-QAM	-21.27	12.94	10.13	2.12	V		0.124	20.95
1880.0		QPSK	-19.84	14.71	10.15	2.15	V		0.187	22.71
		16-QAM	-20.48	14.07	10.15	2.15	V		0.161	22.07
		64-QAM	-21.62	12.93	10.15	2.15	V		0.124	20.93
1902.5		QPSK	-20.06	14.73	10.20	2.15	V		0.189	22.78
		16-QAM	-20.76	14.03	10.20	2.15	V		0.161	22.08
		64-QAM	-21.94	12.85	10.20	2.15	V		0.123	20.90

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1860.0	LTE B2/ 20 MHz	QPSK	-19.61	14.60	10.13	2.12	V	< 2.00	0.182	22.61
		16-QAM	-20.23	13.98	10.13	2.12	V		0.158	21.99
		64-QAM	-21.36	12.85	10.13	2.12	V		0.122	20.86
1880.0		QPSK	-19.67	14.88	10.15	2.15	V		0.194	22.88
		16-QAM	-20.34	14.21	10.15	2.15	V		0.166	22.21
		64-QAM	-21.52	13.03	10.15	2.15	V		0.127	21.03
1900.0		QPSK	-20.13	14.66	10.20	2.15	V		0.186	22.71
		16-QAM	-20.83	13.96	10.20	2.15	V		0.159	22.01
		64-QAM	-21.98	12.81	10.20	2.15	V		0.122	20.86

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1880.0 MHz
- ▣ MEASURED OUTPUT POWER: 23.02 dBm = 0.200 W
- ▣ MODE: LTE B2
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 36.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
18650 (1855.0)	3 710.00	-45.27	12.43	-49.50	3.08	H	-40.15	63.17
	5 565.00	-51.26	13.18	-49.36	3.83	V	-40.01	63.03
	7 420.00	-42.38	11.15	-31.84	4.43	H	-25.12	48.14
18900 (1880.0)	3 760.00	-46.25	12.48	-50.12	3.10	H	-40.74	63.76
	5 640.00	-50.00	13.30	-47.83	3.85	V	-38.38	61.40
	7 520.00	-44.53	11.30	-33.96	4.46	H	-27.12	50.14
19150 (1905.0)	3 810.00	-53.05	12.40	-57.40	3.13	H	-48.13	71.15
	5 715.00	-55.74	13.37	-52.96	3.88	V	-43.48	66.50
	7 620.00	-44.94	11.60	-34.73	4.48	H	-27.61	50.63

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
2	1.4 MHz	1880.0	QPSK	6	0	4.62
			16-QAM	6	0	5.96
			64-QAM	6	0	6.68
	3 MHz		QPSK	15	0	4.70
			16-QAM	15	0	5.93
			64-QAM	15	0	6.57
	5 MHz		QPSK	25	0	4.73
			16-QAM	25	0	5.95
			64-QAM	25	0	6.60
	10 MHz		QPSK	50	0	4.80
			16-QAM	50	0	5.55
			64-QAM	50	0	6.60
	15 MHz		QPSK	75	0	4.79
			16-QAM	75	0	5.55
			64-QAM	75	0	6.67
20 MHz	QPSK	100	0	4.80		
	16-QAM	100	0	5.55		
	64-QAM	100	0	6.64		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 103 ~ 120.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
2	1.4 MHz	1880.0	QPSK	6	0	1.0942
			16-QAM	6	0	1.0894
			64-QAM	6	0	1.0927
	3 MHz		QPSK	15	0	2.7095
			16-QAM	15	0	2.6990
			64-QAM	15	0	2.7013
	5 MHz		QPSK	25	0	4.5077
			16-QAM	25	0	4.4845
			64-QAM	25	0	4.5099
	10 MHz		QPSK	50	0	8.9697
			16-QAM	50	0	8.9922
			64-QAM	50	0	8.9826
	15 MHz		QPSK	75	0	13.478
			16-QAM	75	0	13.482
			64-QAM	75	0	13.456
	20 MHz		QPSK	100	0	18.015
			16-QAM	100	0	17.935
			64-QAM	100	0	17.935

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 85 ~ 102.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
2	1.4	1850.7	3.7015	27.976	-72.740	-44.764	-13.00
		1880.0	3.7598	27.976	-73.663	-45.687	
		1909.3	3.8201	27.976	-71.777	-43.801	
	3	1851.5	3.7010	27.976	-72.827	-44.851	
		1880.0	3.7583	27.976	-72.437	-44.461	
		1908.5	3.8201	27.976	-72.911	-44.935	
	5	1852.5	3.7015	27.976	-72.150	-44.174	
		1880.0	3.7563	27.976	-73.724	-45.748	
		1907.5	3.8201	27.976	-71.701	-43.725	
	10	1855.0	3.7020	27.976	-72.978	-45.002	
		1880.0	3.7518	27.976	-71.932	-43.956	
		1905.0	3.8196	27.976	-72.559	-44.583	
	15	1857.5	3.7024	27.976	-74.171	-46.195	
		1880.0	3.7473	27.976	-72.385	-44.409	
		1902.5	3.8191	27.976	-72.843	-44.867	
	20	1860.0	3.7029	27.976	-74.122	-46.146	
		1880.0	3.7428	27.976	-71.881	-43.905	
		1900.0	3.8186	27.976	-73.128	-45.152	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 121 ~ 156.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 49 ~ 84.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 18607 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1850 700 002	0.0	0.000 000	0.000
100%		-30	1850 700 007	4.7	0.000 000	0.003
100%		-20	1850 700 006	3.7	0.000 000	0.002
100%		-10	1850 700 006	3.5	0.000 000	0.002
100%		0	1850 700 006	3.8	0.000 000	0.002
100%		+10	1850 700 006	4.3	0.000 000	0.002
100%		+30	1850 700 000	-1.8	0.000 000	-0.001
100%		+40	1850 700 000	-1.8	0.000 000	-0.001
100%		+50	1850 700 003	1.3	0.000 000	0.001
Batt. Endpoint		3.550	+20	1850 700 007	4.7	0.000 000

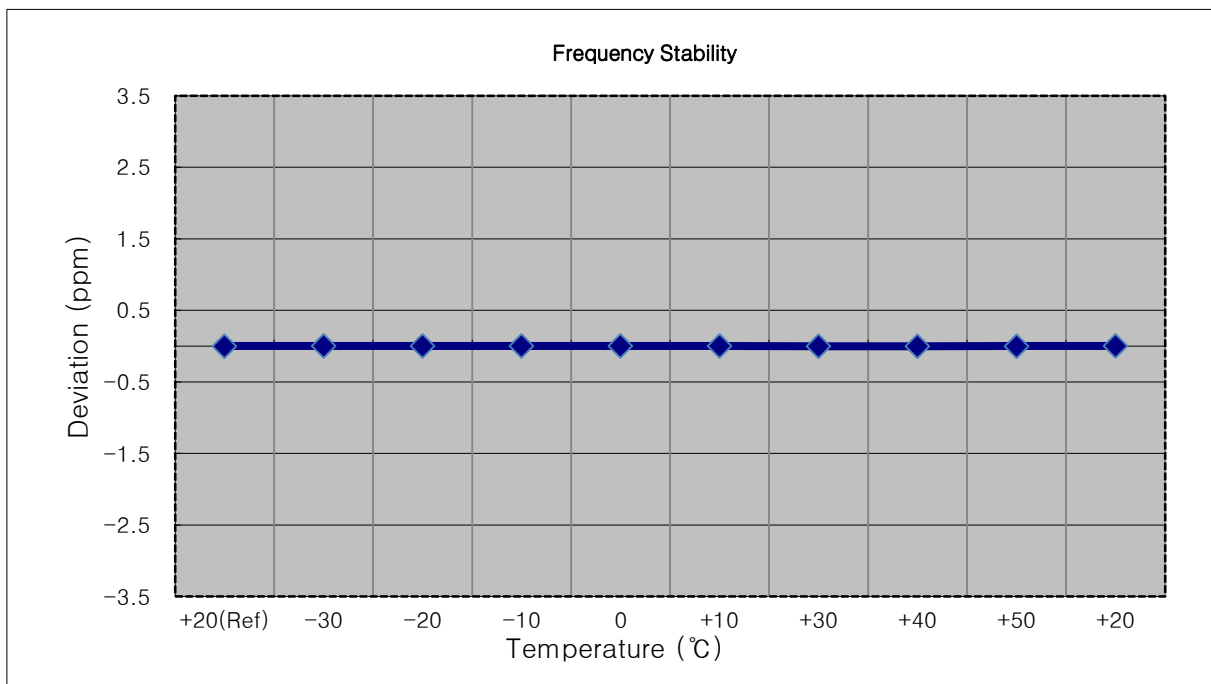


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 18615 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1851 500 005	0.0	0.000 000	0.000
100%		-30	1851 500 008	3.2	0.000 000	0.002
100%		-20	1851 500 009	3.7	0.000 000	0.002
100%		-10	1851 500 012	6.8	0.000 000	0.004
100%		0	1851 500 010	4.6	0.000 000	0.002
100%		+10	1851 500 006	1.2	0.000 000	0.001
100%		+30	1851 500 010	4.9	0.000 000	0.003
100%		+40	1851 500 008	2.9	0.000 000	0.002
100%		+50	1851 500 010	4.9	0.000 000	0.003
Batt. Endpoint		3.550	+20	1851 500 010	4.6	0.000 000

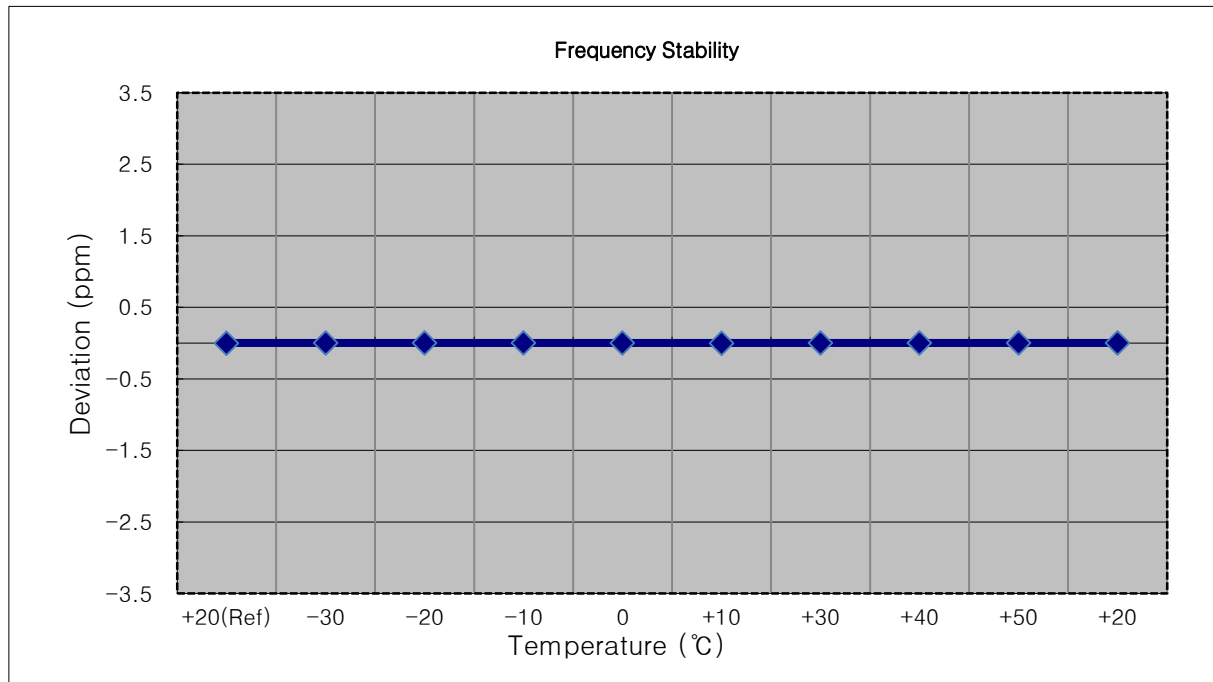


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 18625 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1852 499 998	0.0	0.000 000	0.000
100%		-30	1852 499 995	-3.3	0.000 000	-0.002
100%		-20	1852 500 001	2.6	0.000 000	0.001
100%		-10	1852 500 000	1.9	0.000 000	0.001
100%		0	1852 499 995	-3.1	0.000 000	-0.002
100%		+10	1852 499 995	-3.1	0.000 000	-0.002
100%		+30	1852 499 995	-3.2	0.000 000	-0.002
100%		+40	1852 499 999	1.4	0.000 000	0.001
100%		+50	1852 500 000	2.1	0.000 000	0.001
Batt. Endpoint		3.550	+20	1852 499 995	-3.4	0.000 000

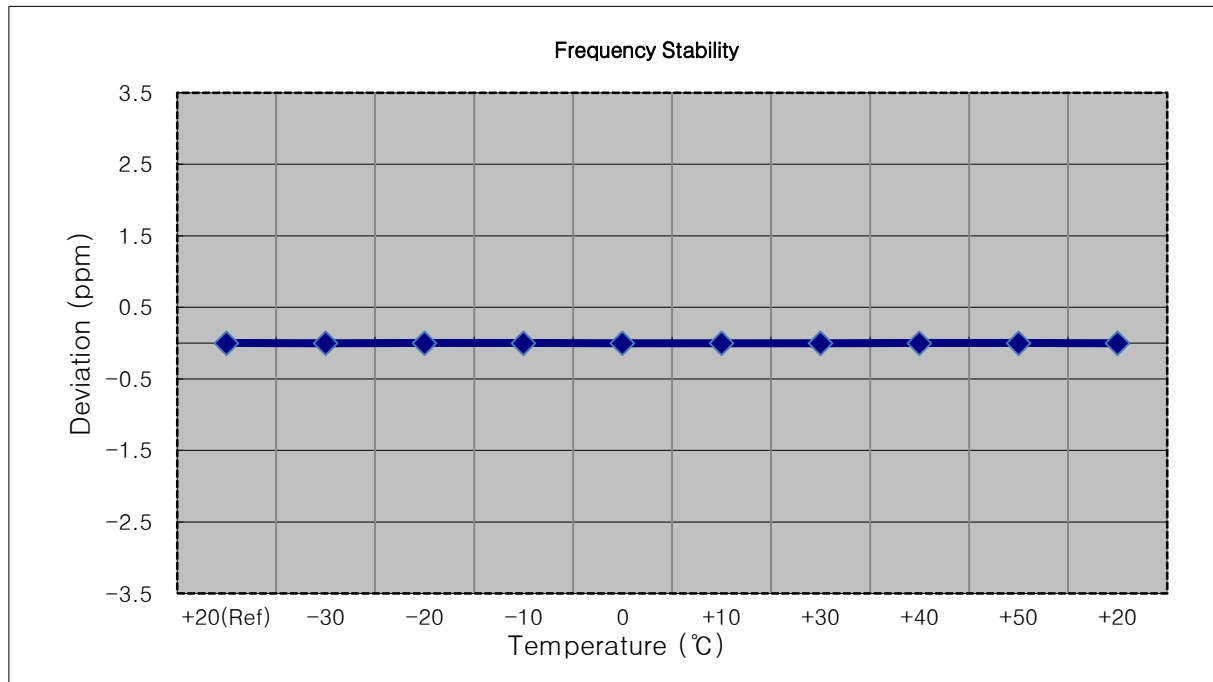


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 18650 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1855 000 002	0.0	0.000 000	0.000
100%		-30	1854 999 999	-2.3	0.000 000	-0.001
100%		-20	1855 000 000	-1.7	0.000 000	-0.001
100%		-10	1854 999 997	-4.1	0.000 000	-0.002
100%		0	1854 999 999	-2.7	0.000 000	-0.001
100%		+10	1855 000 000	-1.9	0.000 000	-0.001
100%		+30	1855 000 005	3.4	0.000 000	0.002
100%		+40	1854 999 999	-2.5	0.000 000	-0.001
100%		+50	1854 999 999	-2.2	0.000 000	-0.001
Batt. Endpoint	3.550	+20	1855 000 004	2.7	0.000 000	0.001

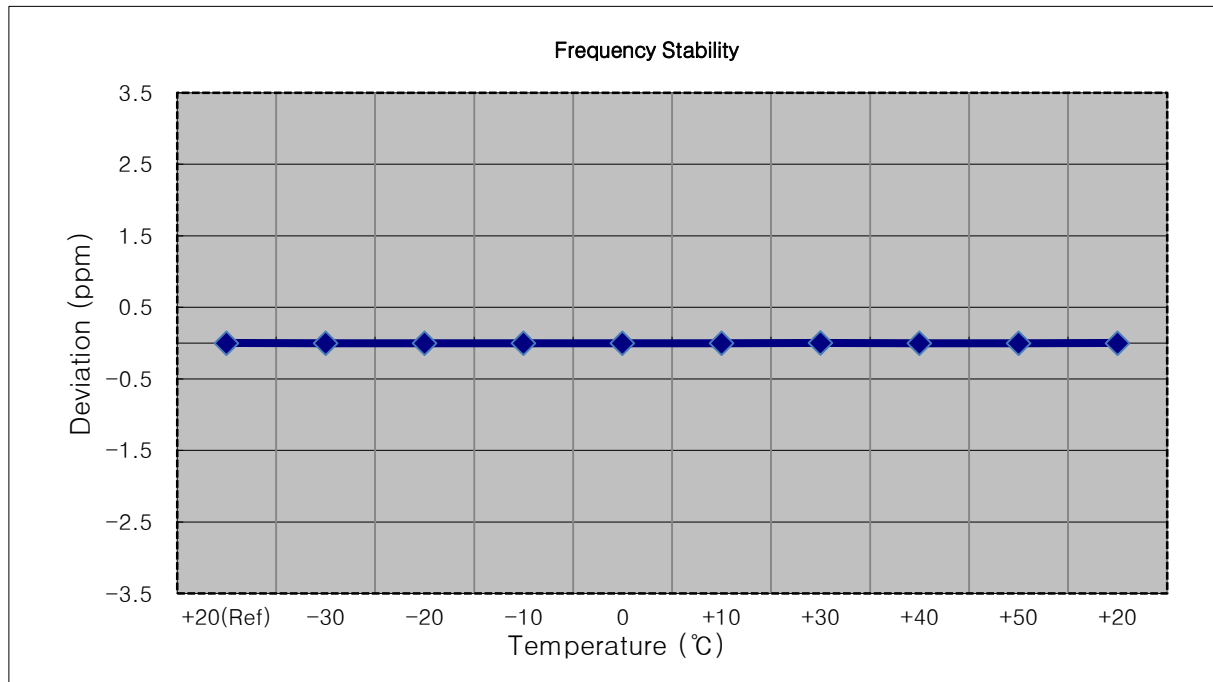


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 18675 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1857 499 998	0.0	0.000 000	0.000
100%		-30	1857 500 001	2.8	0.000 000	0.002
100%		-20	1857 499 996	-2.1	0.000 000	-0.001
100%		-10	1857 500 001	3.4	0.000 000	0.002
100%		0	1857 500 001	2.9	0.000 000	0.002
100%		+10	1857 500 001	3.0	0.000 000	0.002
100%		+30	1857 500 001	2.8	0.000 000	0.002
100%		+40	1857 500 001	2.8	0.000 000	0.002
100%		+50	1857 499 995	-2.5	0.000 000	-0.001
Batt. Endpoint		3.550	+20	1857 499 999	1.4	0.000 000

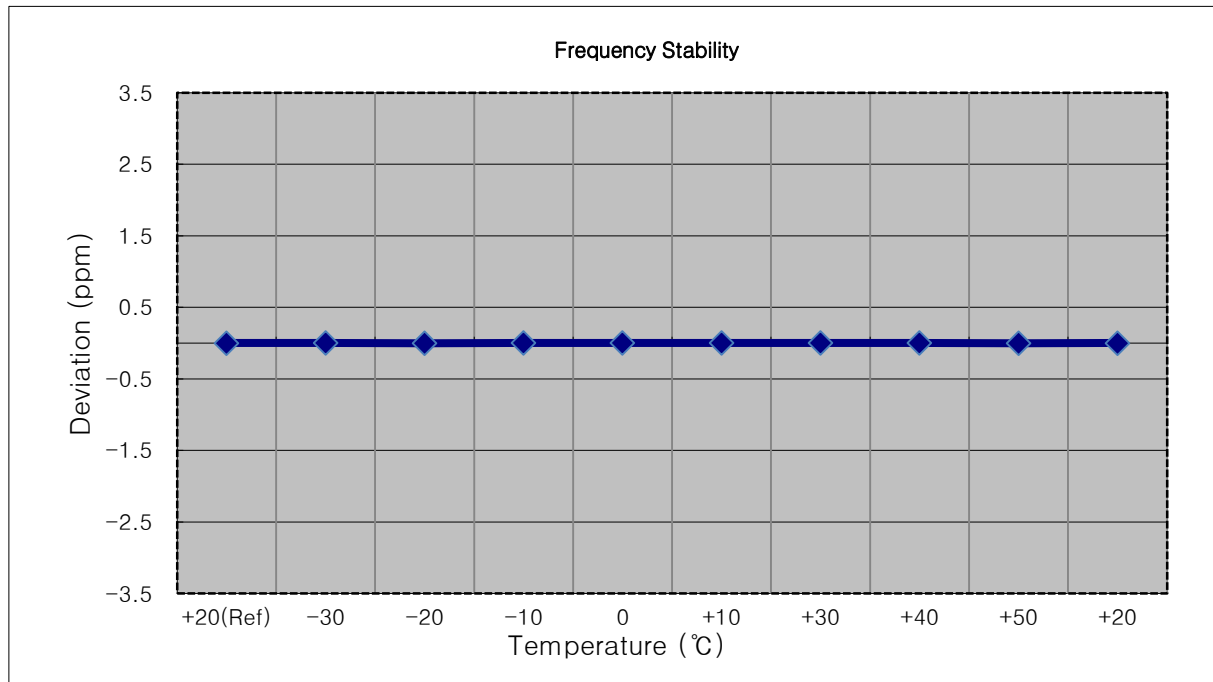


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 18700 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1859 999 998	0.0	0.000 000	0.000
100%		-30	1860 000 004	5.3	0.000 000	0.003
100%		-20	1860 000 001	2.3	0.000 000	0.001
100%		-10	1860 000 002	3.9	0.000 000	0.002
100%		0	1860 000 004	5.6	0.000 000	0.003
100%		+10	1860 000 002	3.7	0.000 000	0.002
100%		+30	1860 000 004	6.0	0.000 000	0.003
100%		+40	1860 000 000	2.0	0.000 000	0.001
100%		+50	1860 000 005	7.1	0.000 000	0.004
Batt. Endpoint		3.550	+20	1860 000 000	2.0	0.000 000

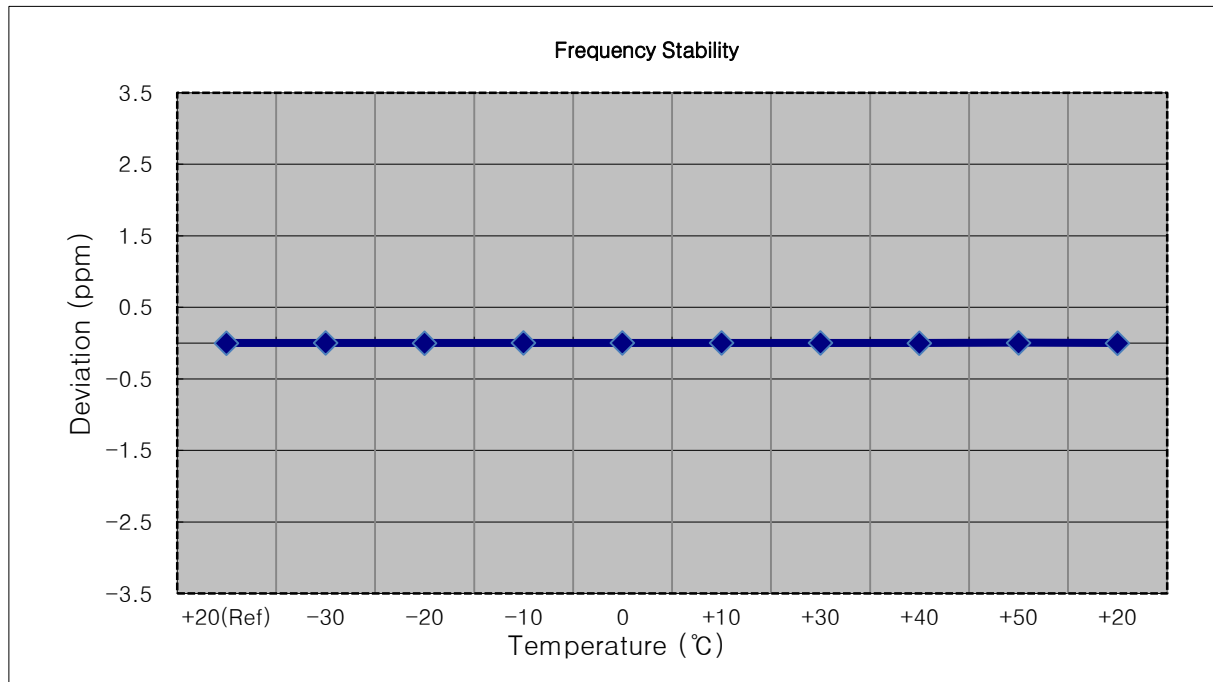


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100%		-30	1880 000 008	5.6	0.000 000	0.003
100%		-20	1880 000 007	4.5	0.000 000	0.002
100%		-10	1880 000 005	3.0	0.000 000	0.002
100%		0	1880 000 005	3.0	0.000 000	0.002
100%		+10	1880 000 006	3.9	0.000 000	0.002
100%		+30	1880 000 000	-2.8	0.000 000	-0.001
100%		+40	1880 000 006	3.8	0.000 000	0.002
100%		+50	1879 999 999	-3.1	0.000 000	-0.002
Batt. Endpoint		3.550	+20	1880 000 007	4.1	0.000 000

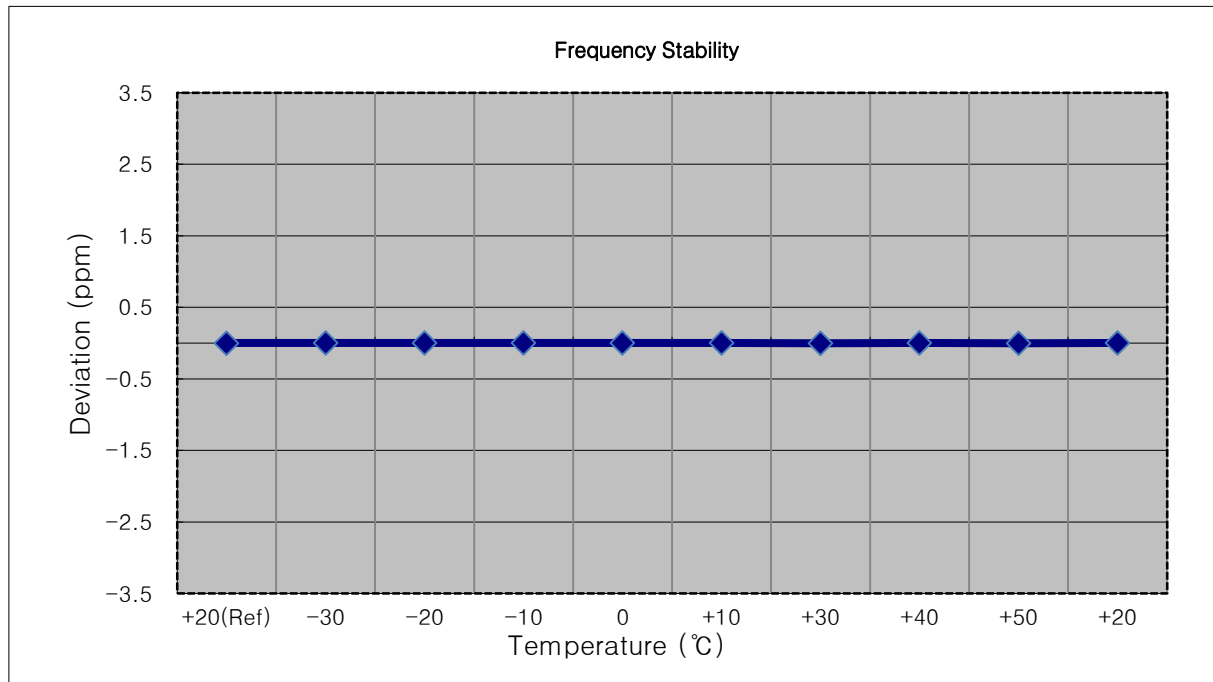


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100%		-30	1880 000 006	2.7	0.000 000	0.001
100%		-20	1880 000 008	4.4	0.000 000	0.002
100%		-10	1880 000 006	2.2	0.000 000	0.001
100%		0	1880 000 006	2.5	0.000 000	0.001
100%		+10	1879 999 999	-4.2	0.000 000	-0.002
100%		+30	1880 000 002	-1.6	0.000 000	-0.001
100%		+40	1880 000 007	3.8	0.000 000	0.002
100%		+50	1880 000 007	3.3	0.000 000	0.002
Batt. Endpoint		3.550	+20	1880 000 010	6.3	0.000 000

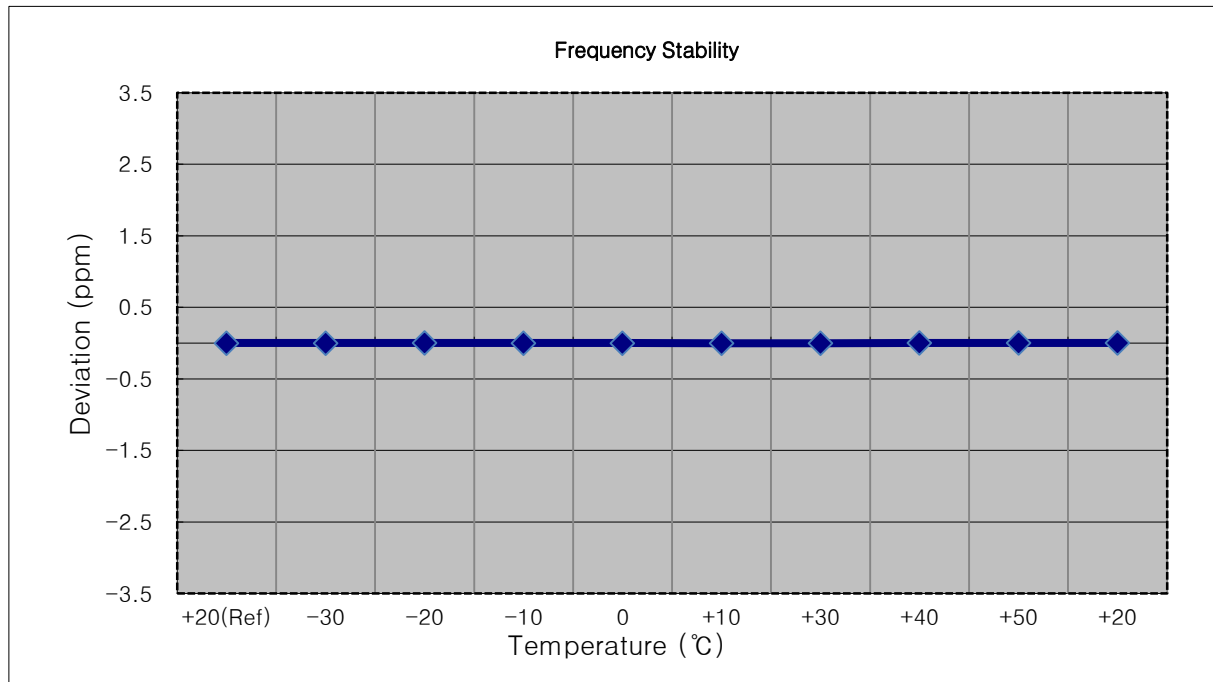


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 005	0.0	0.000 000	0.000
100%		-30	1880 000 003	-2.6	0.000 000	-0.001
100%		-20	1880 000 010	4.9	0.000 000	0.003
100%		-10	1880 000 010	4.4	0.000 000	0.002
100%		0	1880 000 011	5.8	0.000 000	0.003
100%		+10	1880 000 009	4.0	0.000 000	0.002
100%		+30	1880 000 013	7.5	0.000 000	0.004
100%		+40	1880 000 007	1.6	0.000 000	0.001
100%		+50	1880 000 008	2.5	0.000 000	0.001
Batt. Endpoint	3.550	+20	1880 000 002	-3.4	0.000 000	-0.002

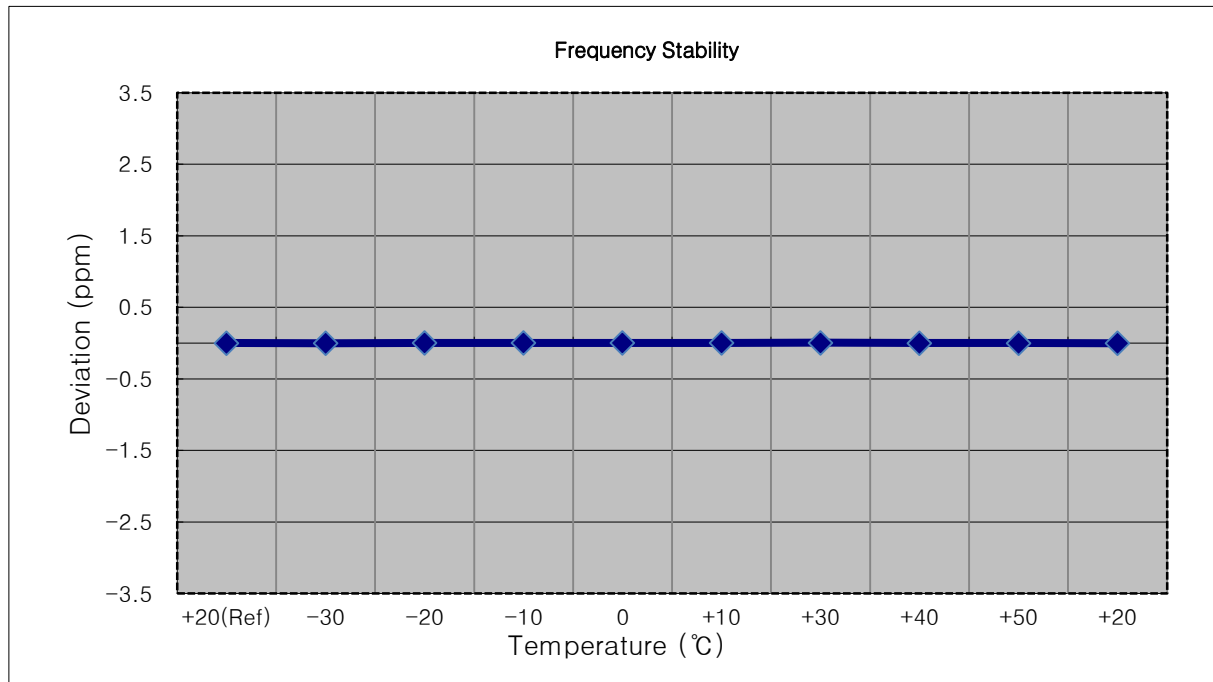


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1879 999 998	0.0	0.000 000	0.000
100%		-30	1880 000 001	2.6	0.000 000	0.001
100%		-20	1879 999 996	-2.6	0.000 000	-0.001
100%		-10	1880 000 000	2.0	0.000 000	0.001
100%		0	1879 999 993	-5.1	0.000 000	-0.003
100%		+10	1880 000 000	1.9	0.000 000	0.001
100%		+30	1879 999 994	-4.5	0.000 000	-0.002
100%		+40	1879 999 996	-2.2	0.000 000	-0.001
100%		+50	1880 000 001	2.7	0.000 000	0.001
Batt. Endpoint		3.550	+20	1880 000 001	2.2	0.000 000

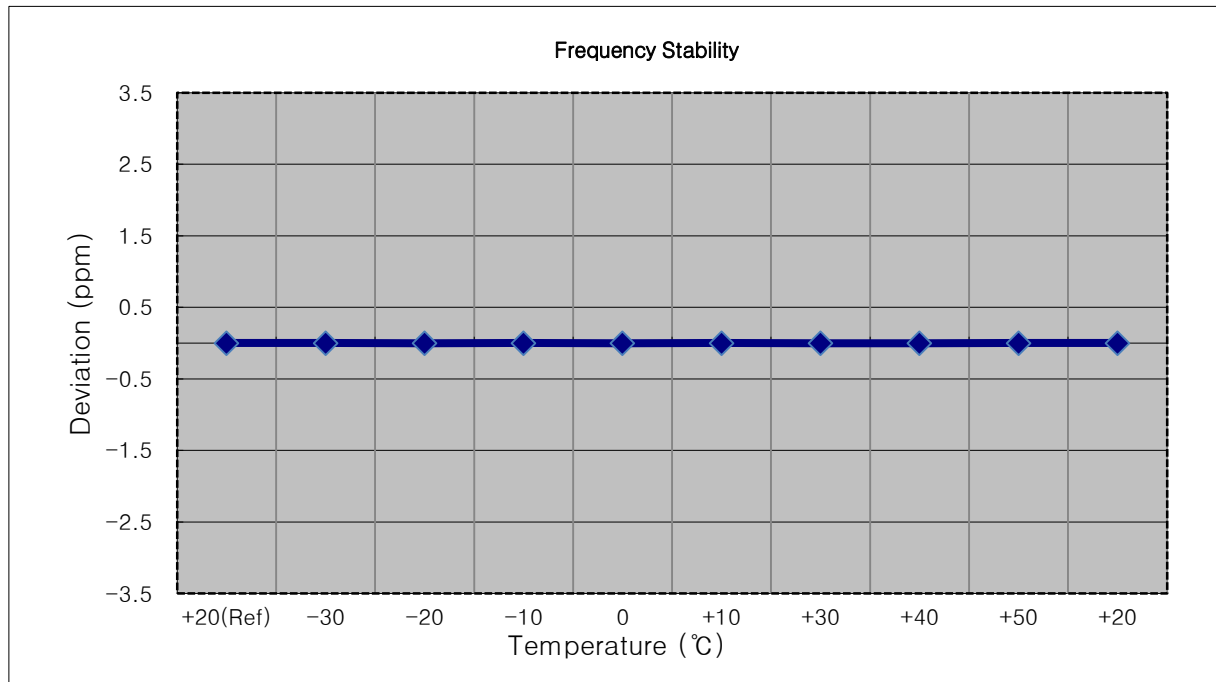


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 002	0.0	0.000 000	0.000
100%		-30	1880 000 008	5.3	0.000 000	0.003
100%		-20	1880 000 007	4.2	0.000 000	0.002
100%		-10	1880 000 007	4.7	0.000 000	0.002
100%		0	1880 000 005	2.1	0.000 000	0.001
100%		+10	1880 000 004	1.9	0.000 000	0.001
100%		+30	1880 000 005	2.7	0.000 000	0.001
100%		+40	1880 000 007	4.4	0.000 000	0.002
100%		+50	1880 000 007	4.9	0.000 000	0.003
Batt. Endpoint	3.550	+20	1880 000 005	2.6	0.000 000	0.001

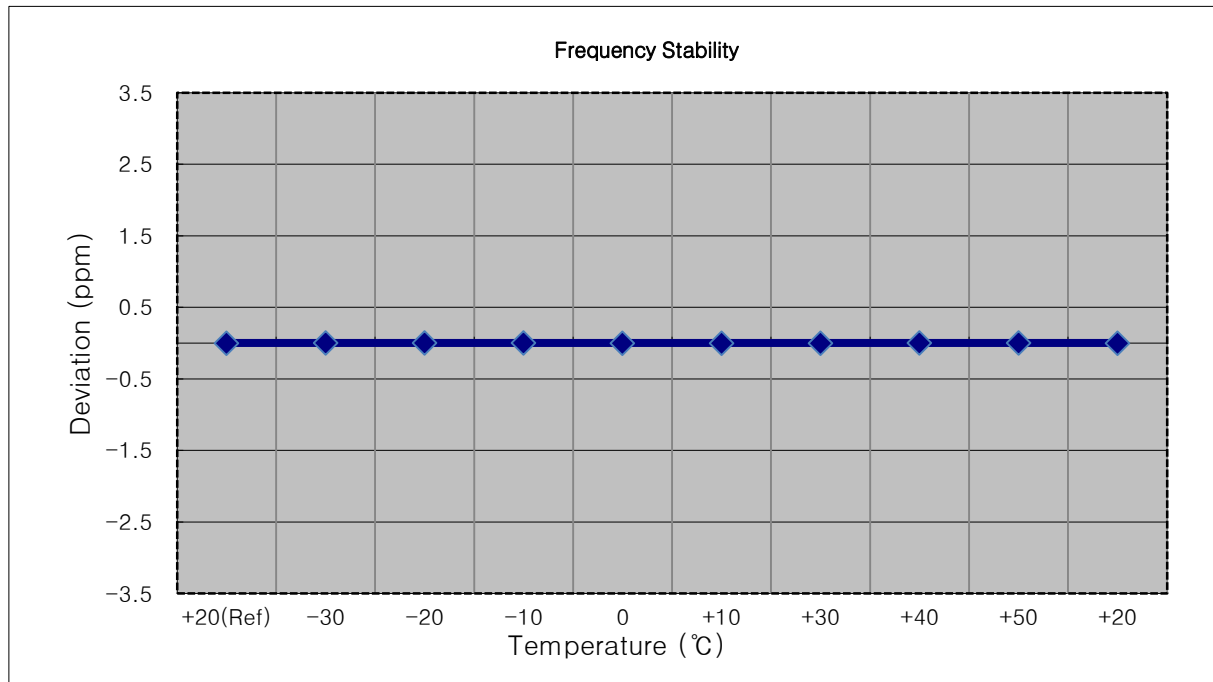


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 18900 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 004	0.0	0.000 000	0.000
100%		-30	1880 000 009	5.4	0.000 000	0.003
100%		-20	1880 000 005	1.1	0.000 000	0.001
100%		-10	1880 000 011	7.2	0.000 000	0.004
100%		0	1880 000 009	4.8	0.000 000	0.003
100%		+10	1880 000 010	5.8	0.000 000	0.003
100%		+30	1880 000 009	4.7	0.000 000	0.002
100%		+40	1880 000 008	3.7	0.000 000	0.002
100%		+50	1880 000 009	5.6	0.000 000	0.003
Batt. Endpoint		3.550	+20	1880 000 009	4.8	0.000 000

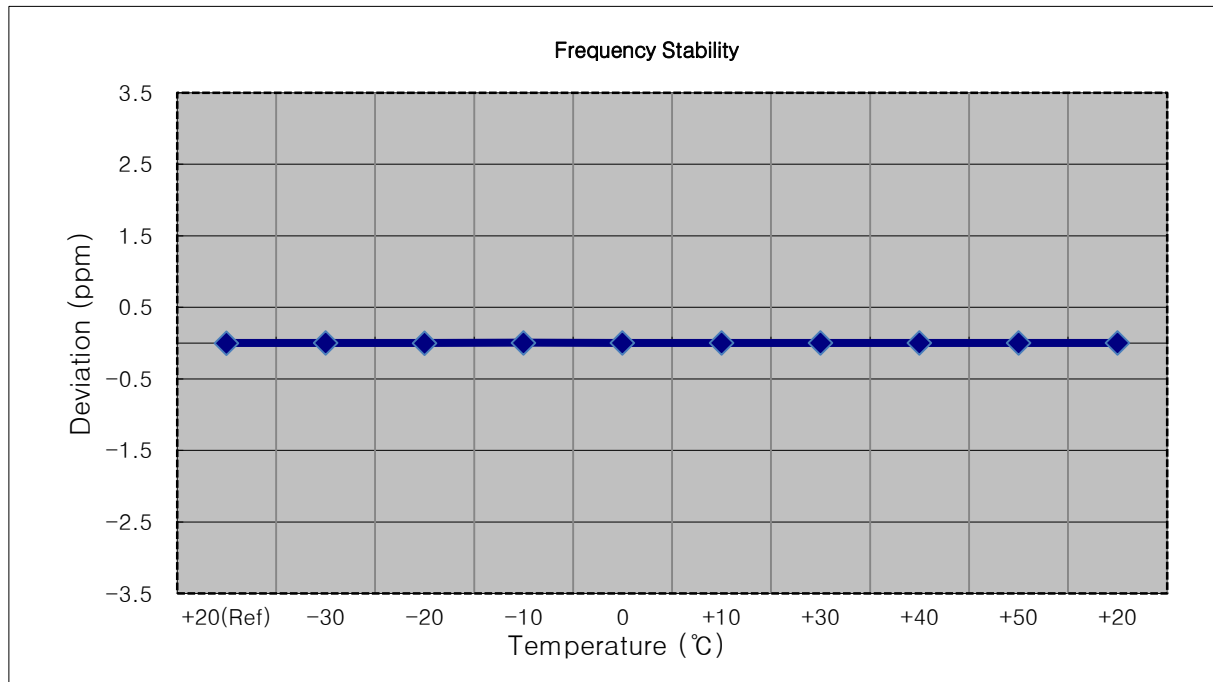


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1909,300,000 Hz
- ▣ CHANNEL: 19193 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1909 300 007	0.0	0.000 000	0.000
100%		-30	1909 300 015	7.9	0.000 000	0.004
100%		-20	1909 300 009	2.4	0.000 000	0.001
100%		-10	1909 300 004	-2.9	0.000 000	-0.002
100%		0	1909 300 012	5.3	0.000 000	0.003
100%		+10	1909 300 010	2.6	0.000 000	0.001
100%		+30	1909 300 004	-3.3	0.000 000	-0.002
100%		+40	1909 300 012	5.1	0.000 000	0.003
100%		+50	1909 300 011	4.0	0.000 000	0.002
Batt. Endpoint	3.550	+20	1909 300 013	5.9	0.000 000	0.003

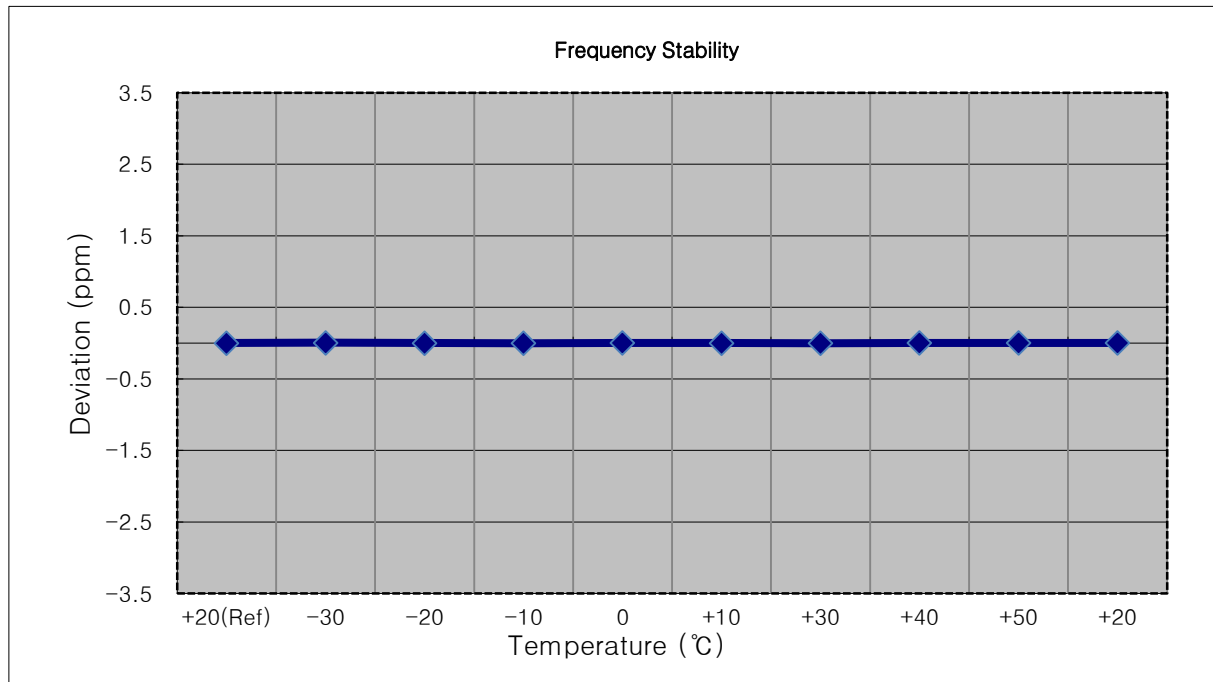


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1908,500,000 Hz
- ▣ CHANNEL: 19185 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1908 500 006	0.0	0.000 000	0.000
100%		-30	1908 499 998	-7.8	0.000 000	-0.004
100%		-20	1908 499 999	-7.1	0.000 000	-0.004
100%		-10	1908 500 012	5.7	0.000 000	0.003
100%		0	1908 499 998	-8.0	0.000 000	-0.004
100%		+10	1908 500 012	5.7	0.000 000	0.003
100%		+30	1908 499 999	-7.2	0.000 000	-0.004
100%		+40	1908 499 997	-9.3	0.000 000	-0.005
100%		+50	1908 500 017	11.1	0.000 001	0.006
Batt. Endpoint		3.550	+20	1908 500 020	14.0	0.000 001

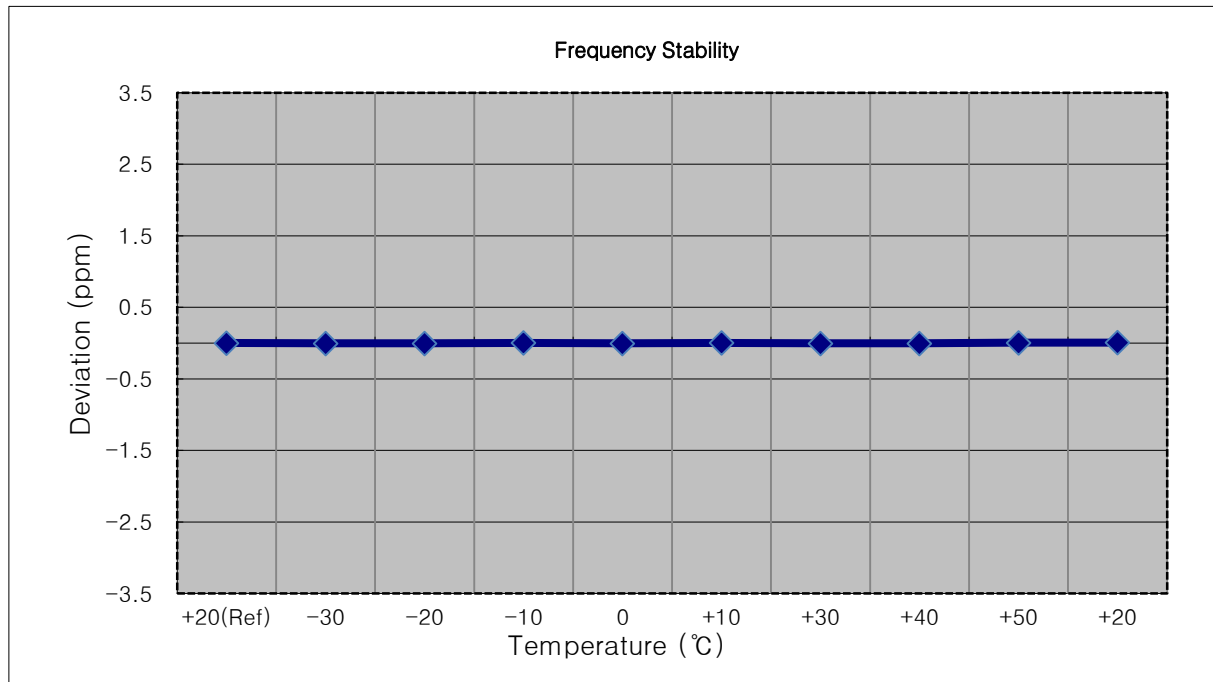


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 19175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1907 500 004	0.0	0.000 000	0.000
100%		-30	1907 500 010	6.2	0.000 000	0.003
100%		-20	1907 500 006	2.5	0.000 000	0.001
100%		-10	1907 500 000	-3.8	0.000 000	-0.002
100%		0	1907 500 008	4.3	0.000 000	0.002
100%		+10	1907 500 009	5.0	0.000 000	0.003
100%		+30	1907 500 008	4.7	0.000 000	0.002
100%		+40	1907 500 001	-2.1	0.000 000	-0.001
100%		+50	1907 500 006	2.9	0.000 000	0.002
Batt. Endpoint		3.550	+20	1907 500 001	-2.1	0.000 000

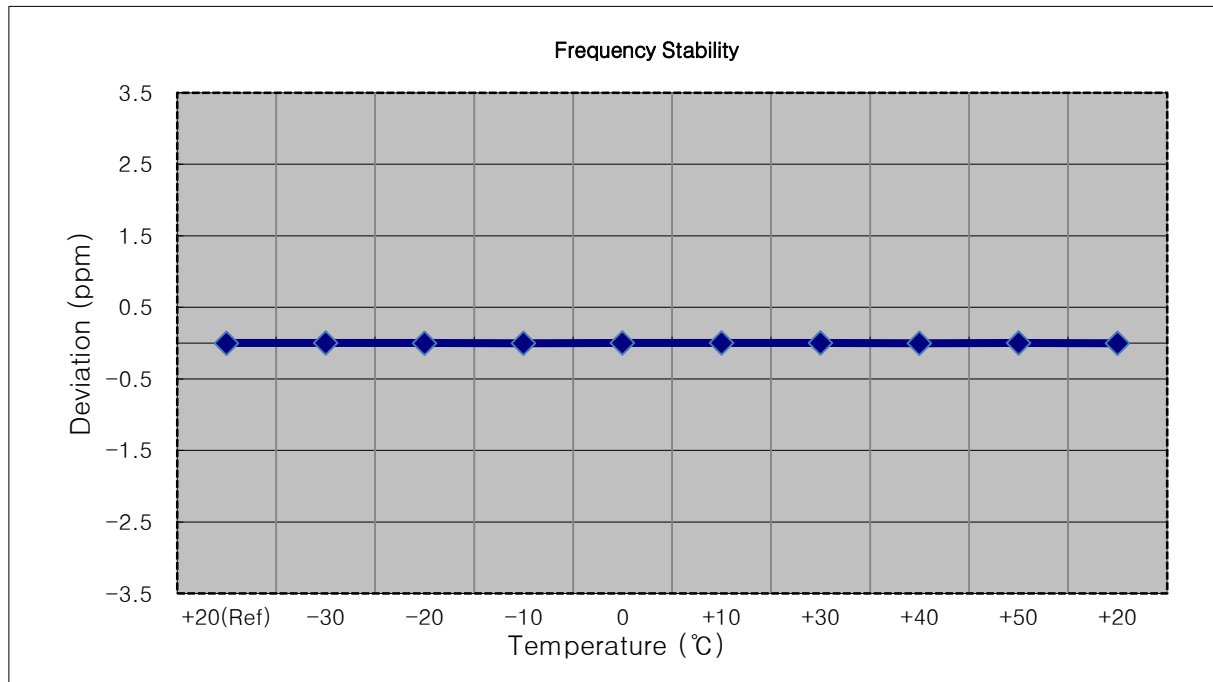


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 19150 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1904 999 994	0.0	0.000 000	0.000
100%		-30	1904 999 990	-3.3	0.000 000	-0.002
100%		-20	1904 999 988	-5.3	0.000 000	-0.003
100%		-10	1904 999 988	-5.9	0.000 000	-0.003
100%		0	1904 999 988	-5.2	0.000 000	-0.003
100%		+10	1904 999 988	-5.6	0.000 000	-0.003
100%		+30	1904 999 987	-7.0	0.000 000	-0.004
100%		+40	1904 999 987	-6.3	0.000 000	-0.003
100%		+50	1904 999 989	-4.7	0.000 000	-0.002
Batt. Endpoint	3.550	+20	1904 999 986	-7.5	0.000 000	-0.004

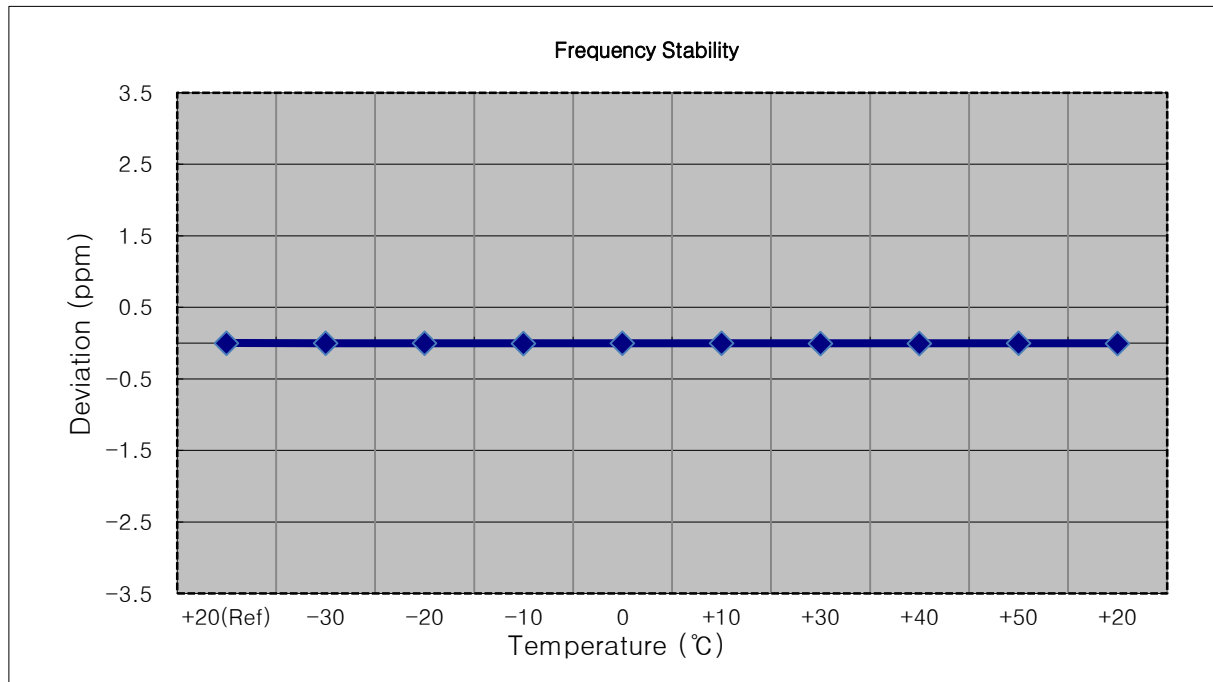


- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1902,500,000 Hz
- ▣ CHANNEL: 19125 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1902 499 993	0.0	0.000 000	0.000
100%		-30	1902 499 990	-3.4	0.000 000	-0.002
100%		-20	1902 499 988	-5.3	0.000 000	-0.003
100%		-10	1902 499 992	-1.7	0.000 000	-0.001
100%		0	1902 499 988	-5.3	0.000 000	-0.003
100%		+10	1902 499 991	-2.6	0.000 000	-0.001
100%		+30	1902 499 991	-2.5	0.000 000	-0.001
100%		+40	1902 499 988	-5.4	0.000 000	-0.003
100%		+50	1902 499 989	-4.5	0.000 000	-0.002
Batt. Endpoint		3.550	+20	1902 499 988	-5.0	0.000 000

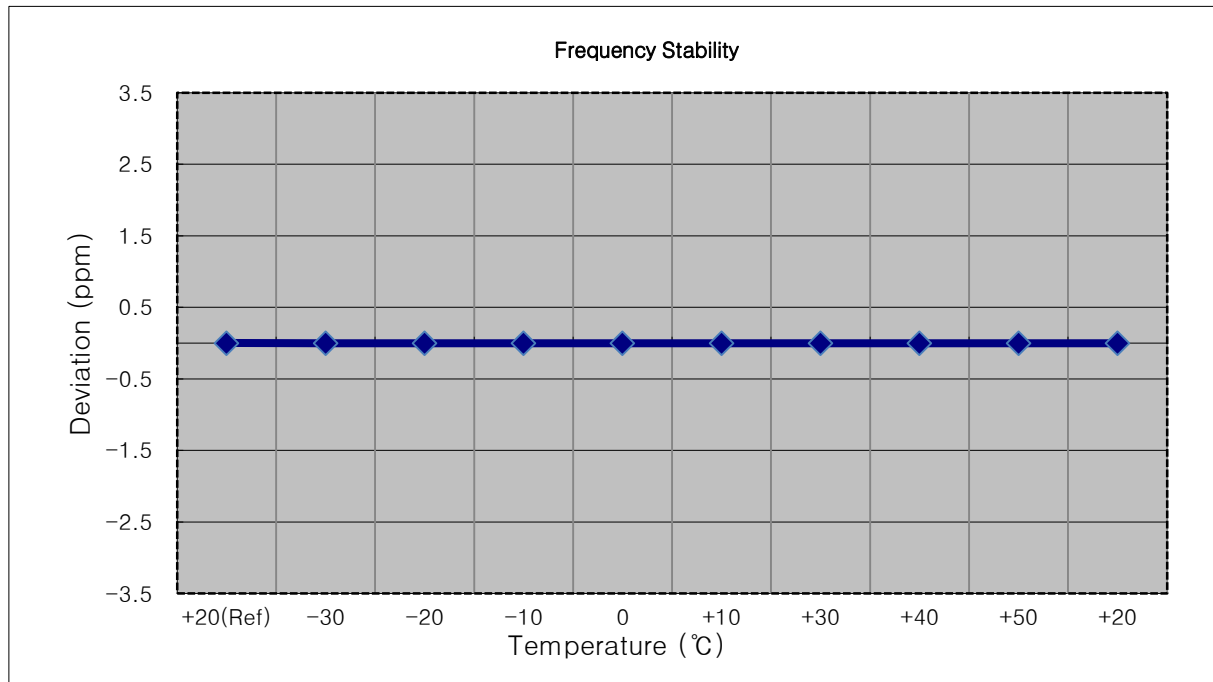

- ▣ MODE: LTE B2
- ▣ OPERATING FREQUENCY: 1900,000,000 Hz
- ▣ CHANNEL: 19100 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1899 999 998	0.0	0.000 000	0.000
100%		-30	1899 999 995	-2.8	0.000 000	-0.001
100%		-20	1899 999 995	-2.1	0.000 000	-0.001
100%		-10	1899 999 993	-4.3	0.000 000	-0.002
100%		0	1899 999 991	-6.4	0.000 000	-0.003
100%		+10	1899 999 995	-2.1	0.000 000	-0.001
100%		+30	1899 999 992	-5.9	0.000 000	-0.003
100%		+40	1899 999 993	-5.0	0.000 000	-0.003
100%		+50	1899 999 992	-5.8	0.000 000	-0.003
Batt. Endpoint		3.550	+20	1899 999 993	-4.1	0.000 000

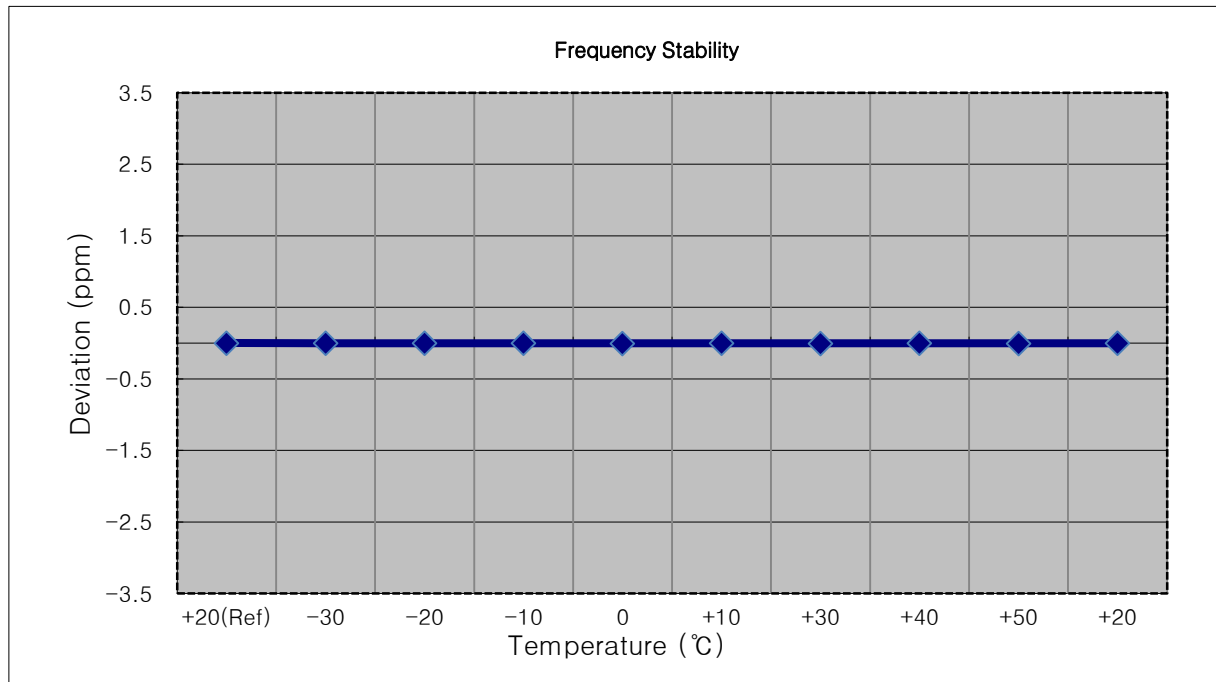

9. TEST PLOTS

BW 1.4 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW 1.4 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)




BW 1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW 1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2)

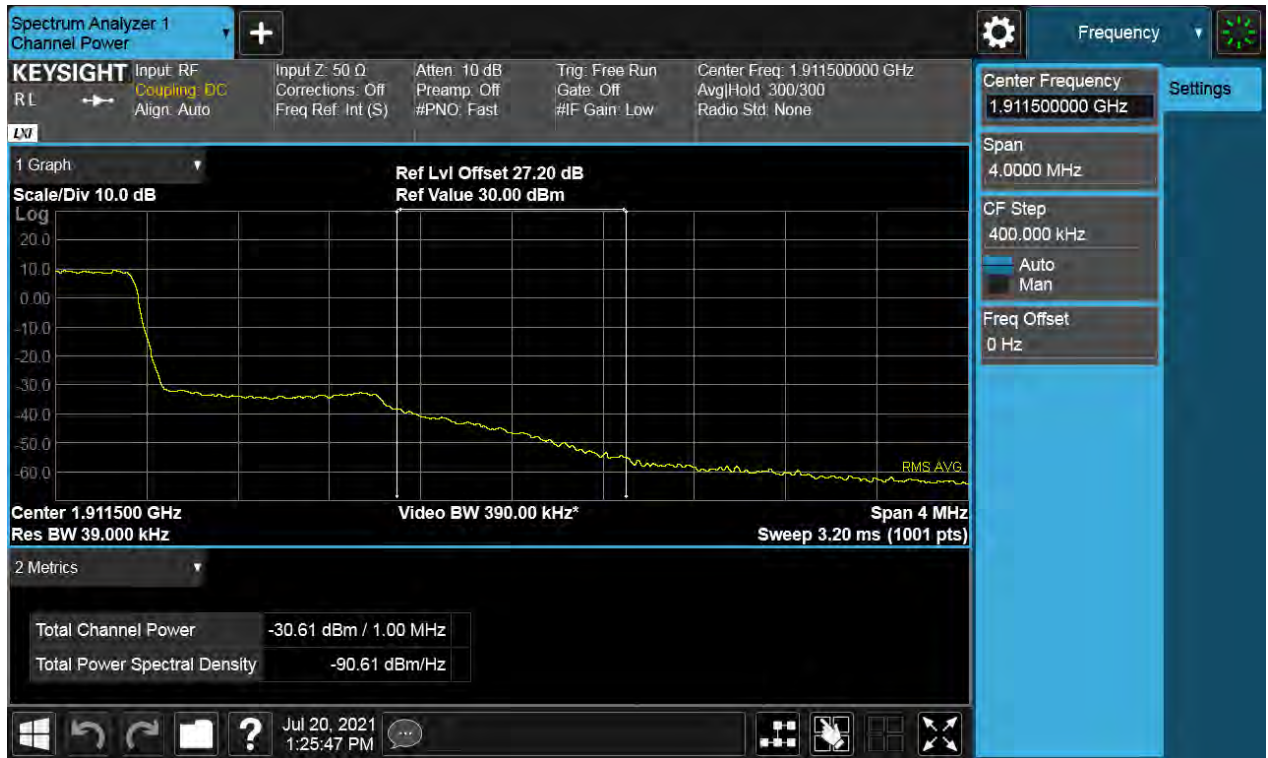

BW 1.4 M_BandEdge_Lowest Channel_QPSK_1RB

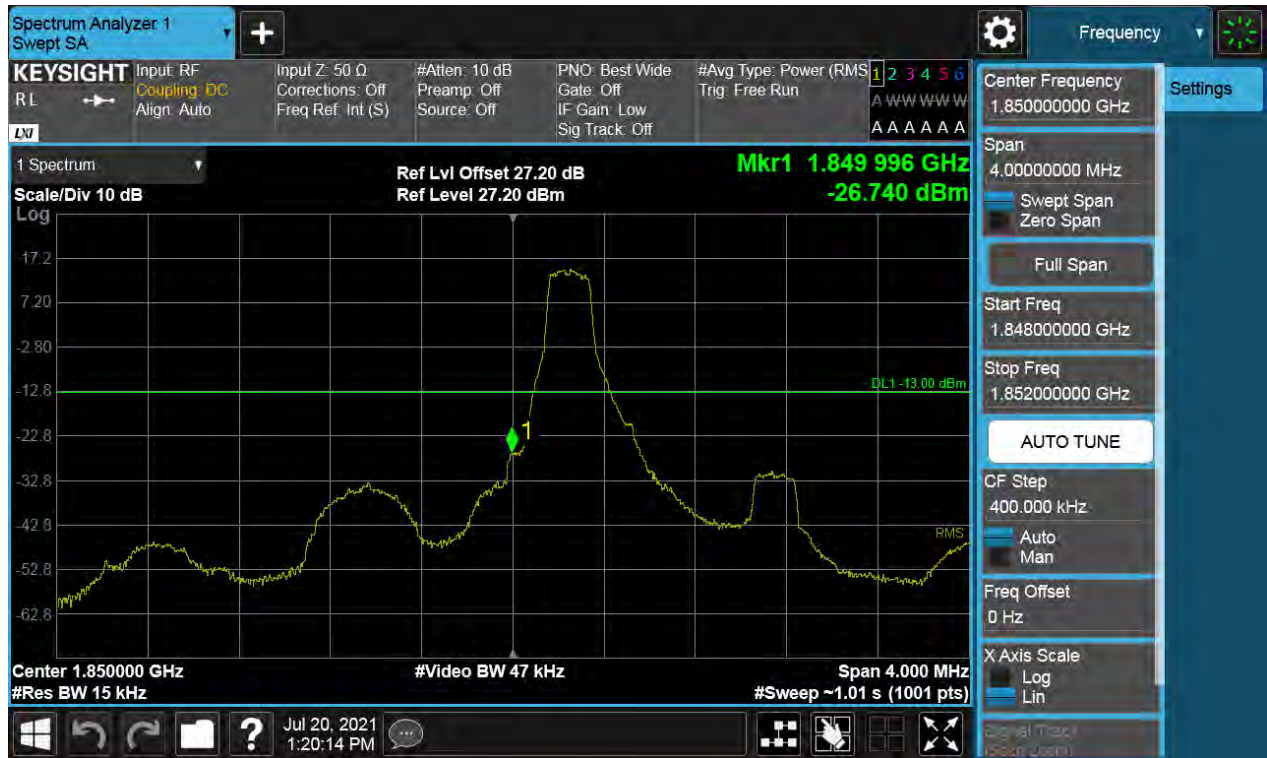


BW 1.4 M_BandEdge_Highest Channel_QPSK_1RB



BW 3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)



BW 3 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

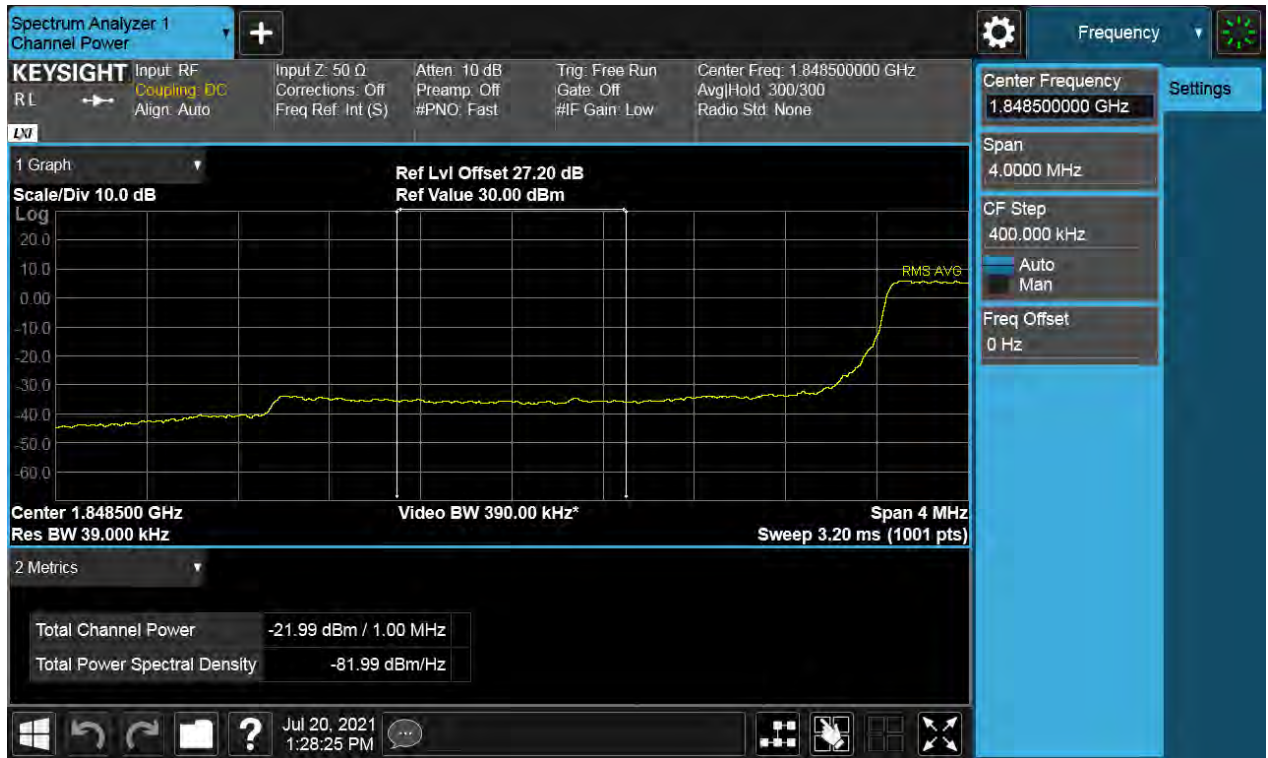


BW 3 M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW 3 M_BandEdge_Highest Channel_QPSK_FullIRB(2)




BW 3 M_BandEdge_Lowest Channel_QPSK_1RB

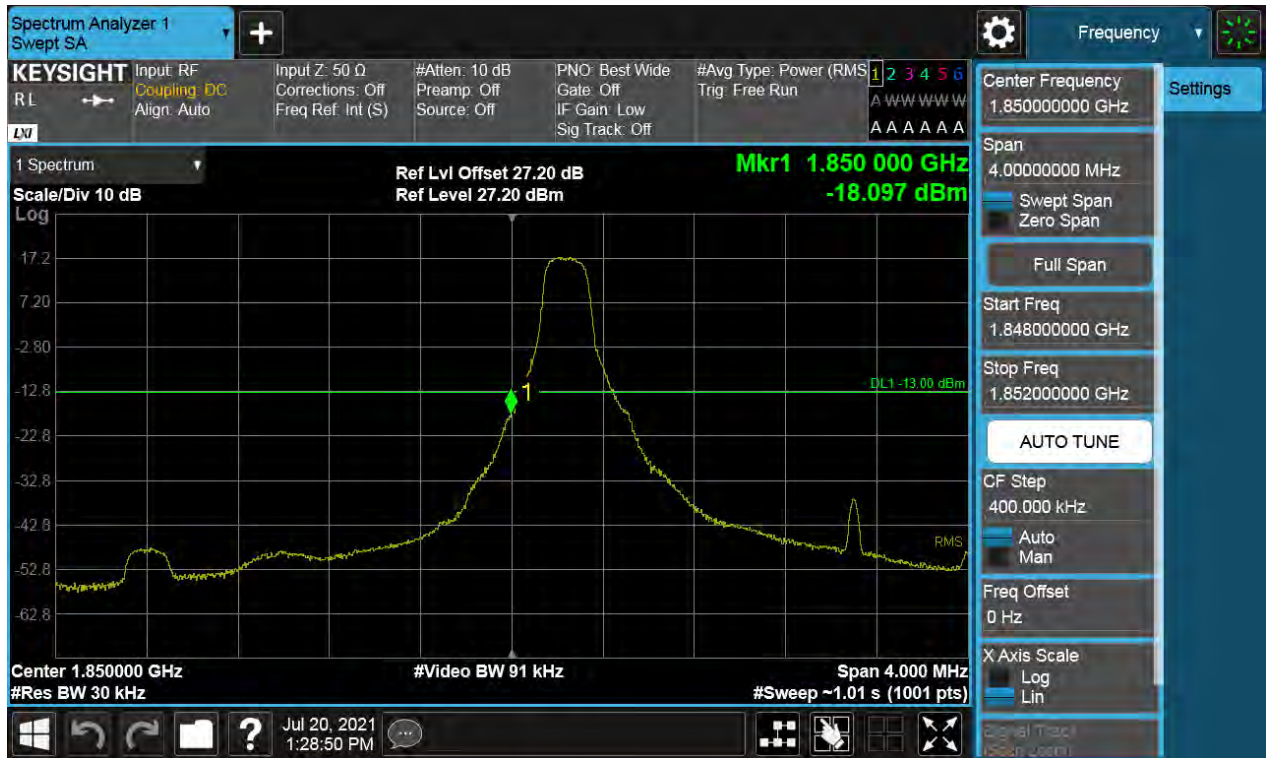


BW 3 M_BandEdge_Highest Channel_QPSK_1RB



BW 5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)

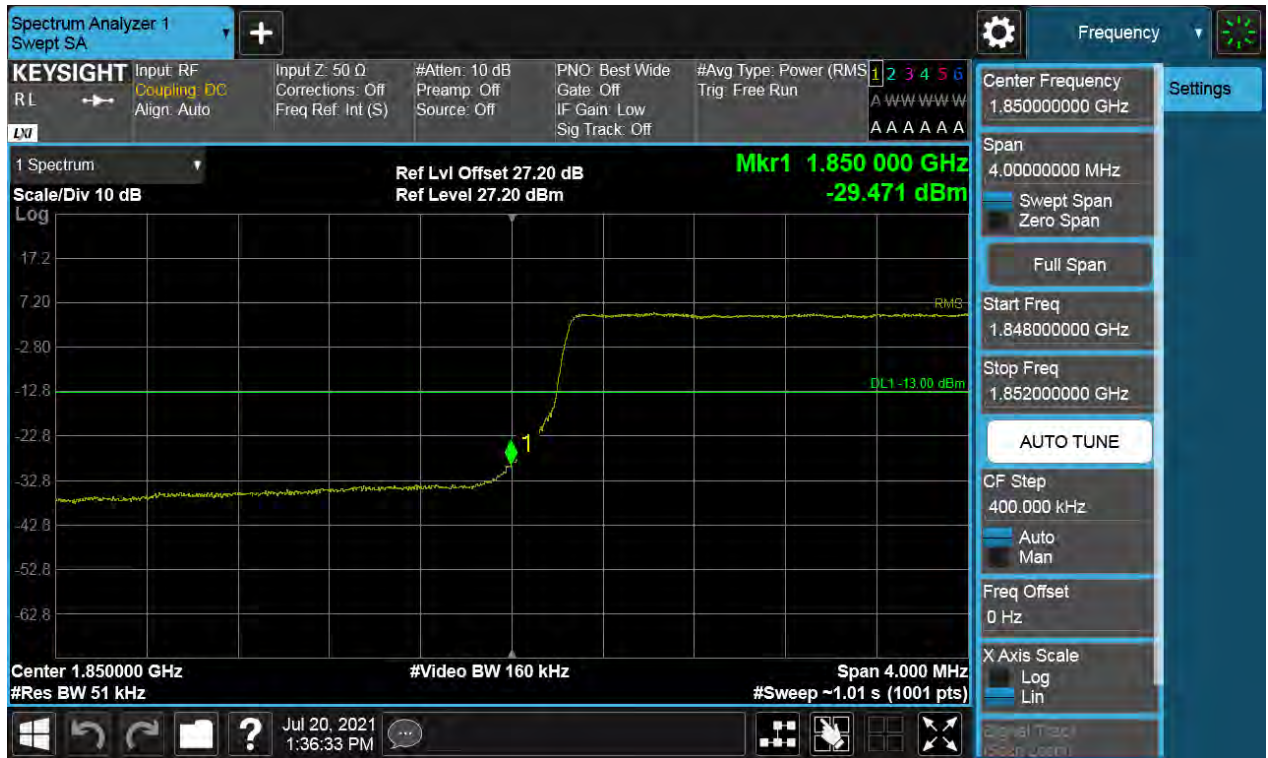

BW 5 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

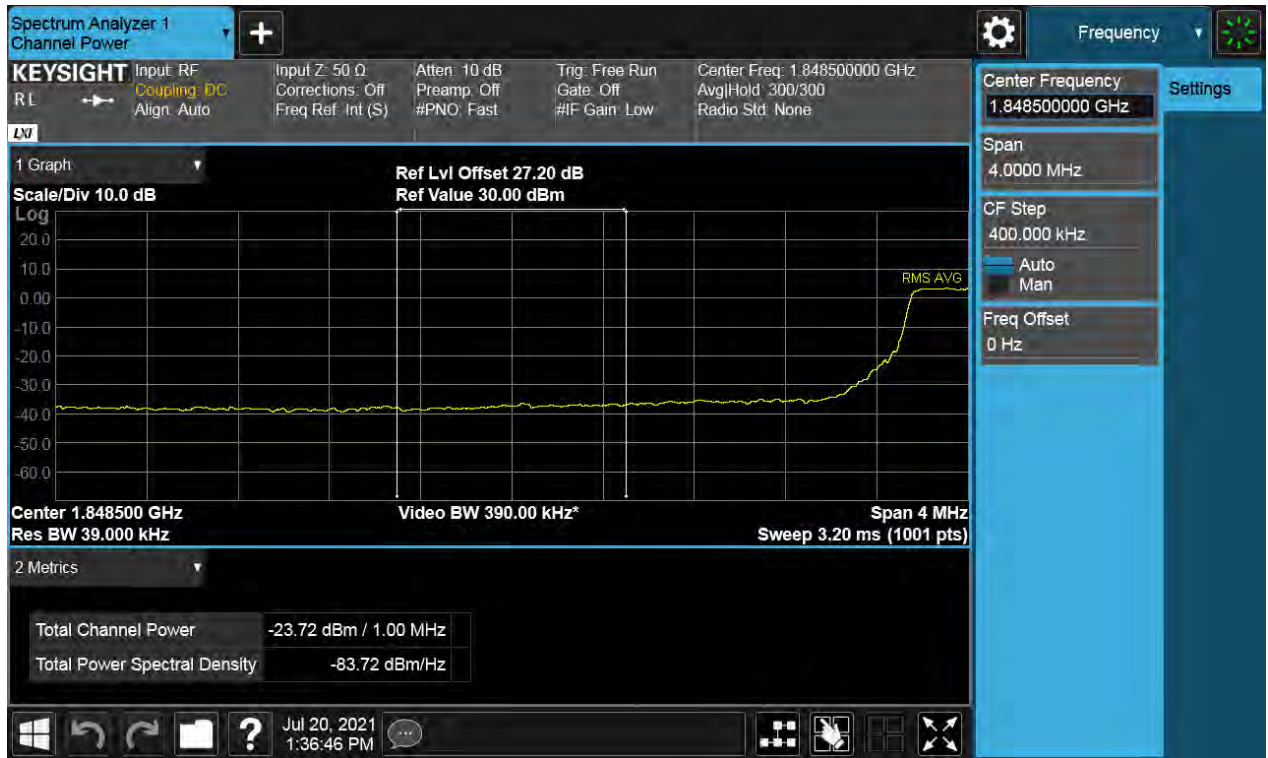


BW 5 M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW 5 M_BandEdge_Highest Channel_QPSK_FullIRB(2)




BW 5 M_BandEdge_Highest Channel_QPSK_1RB

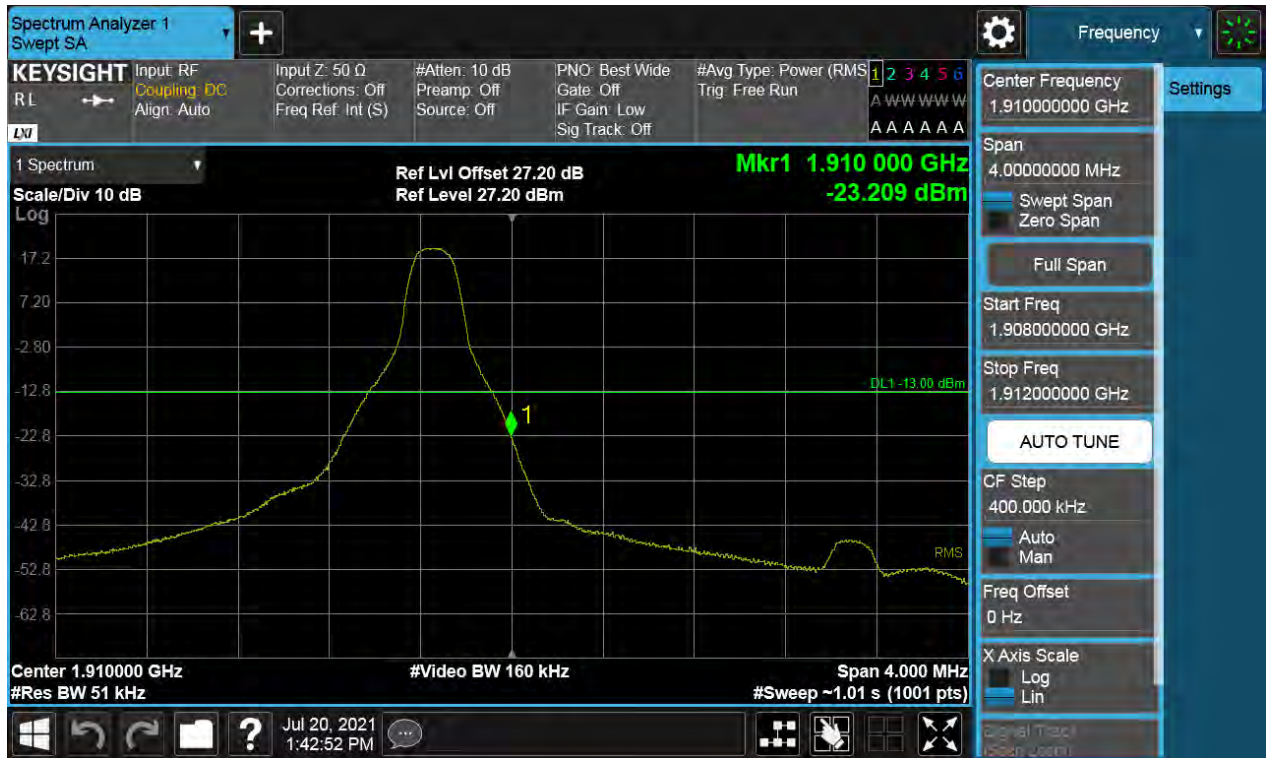

BW 10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW 10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

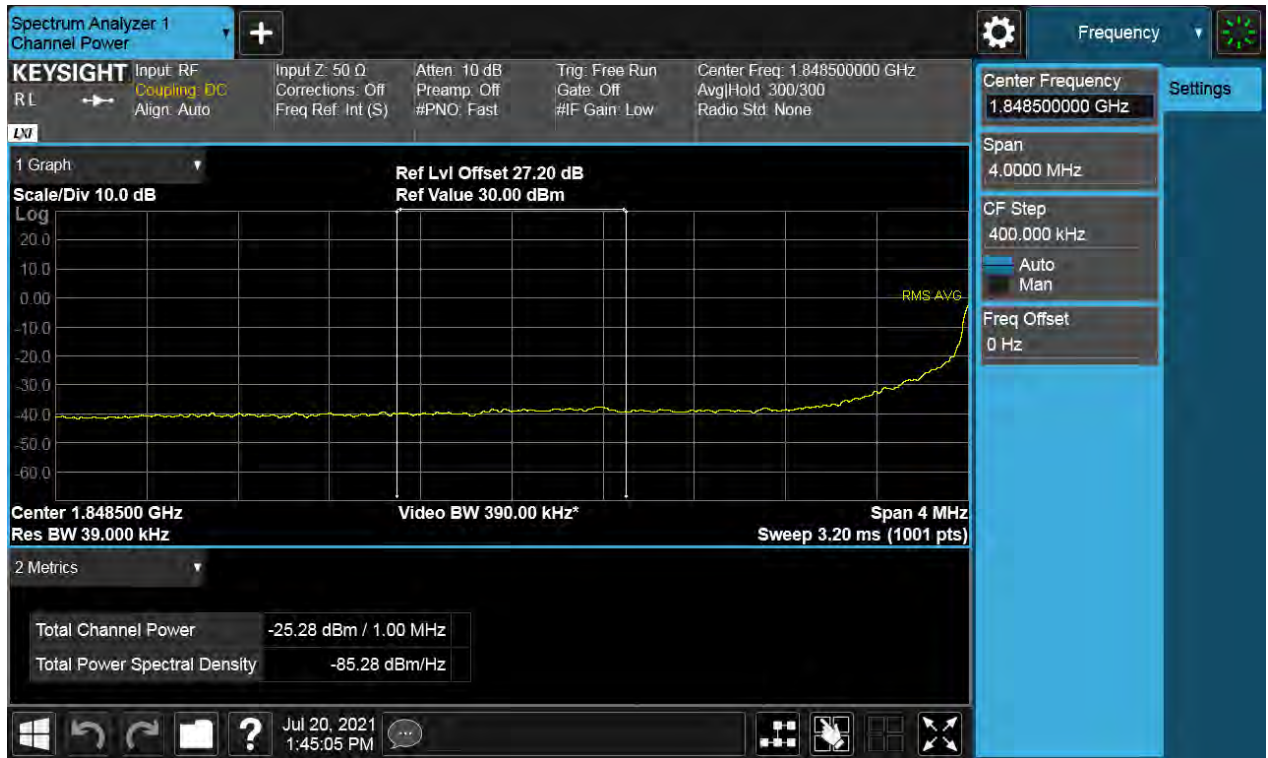


BW 10 M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW 10 M_BandEdge_Highest Channel_QPSK_FullIRB(2)



BW 10 M_BandEdge_Lowest Channel_QPSK_1RB

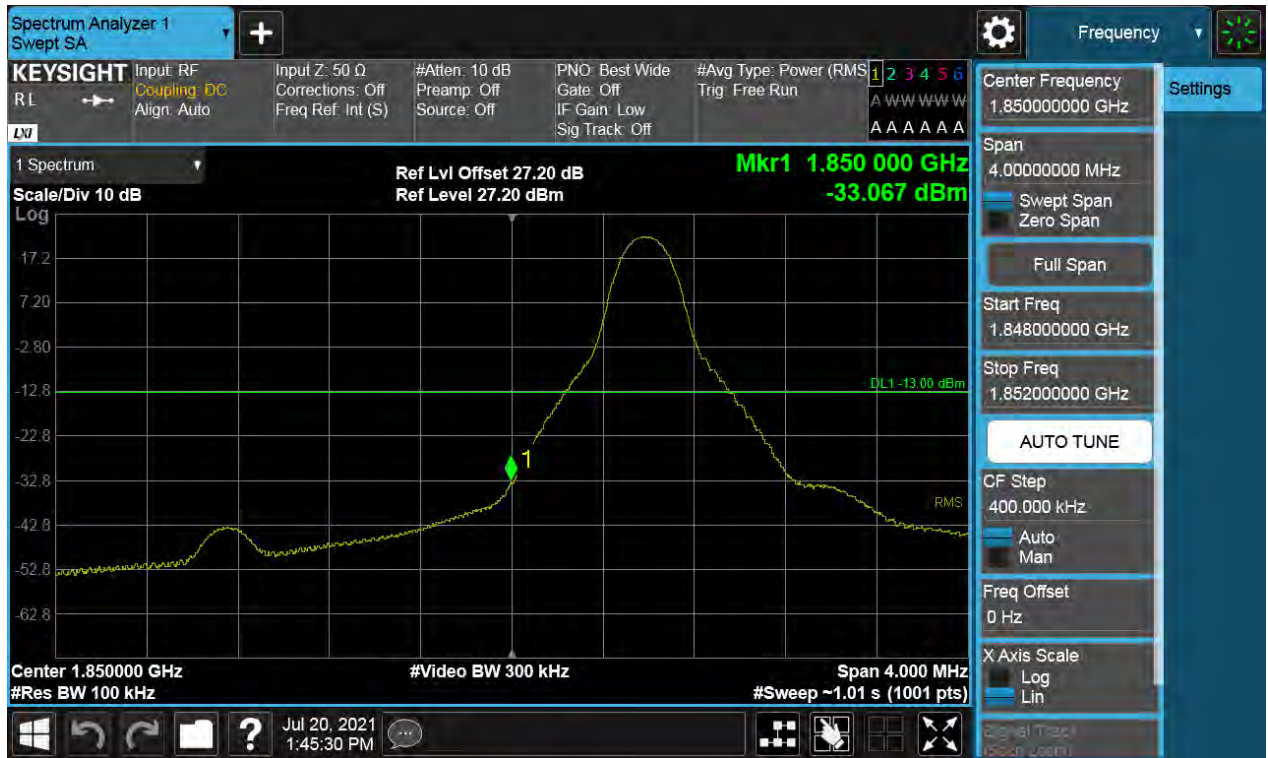


BW 10 M_BandEdge_Highest Channel_QPSK_1RB

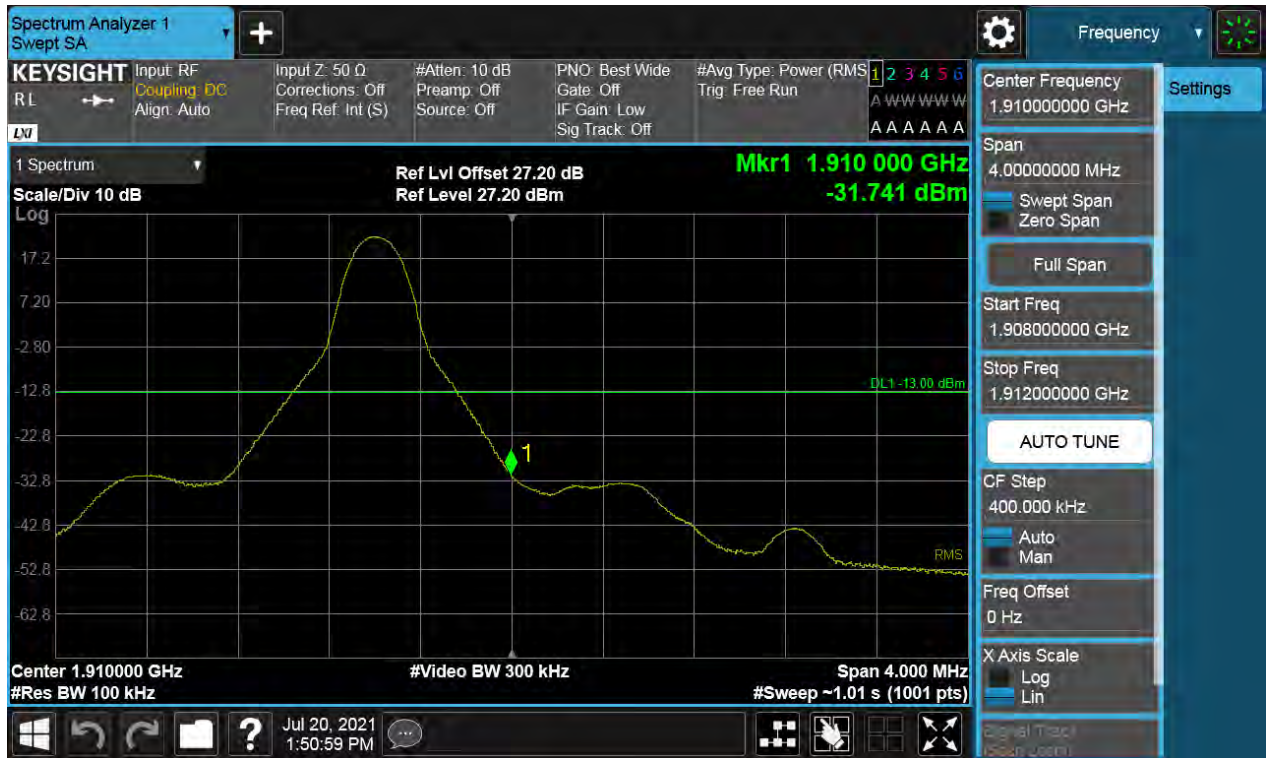

BW 15 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW 15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

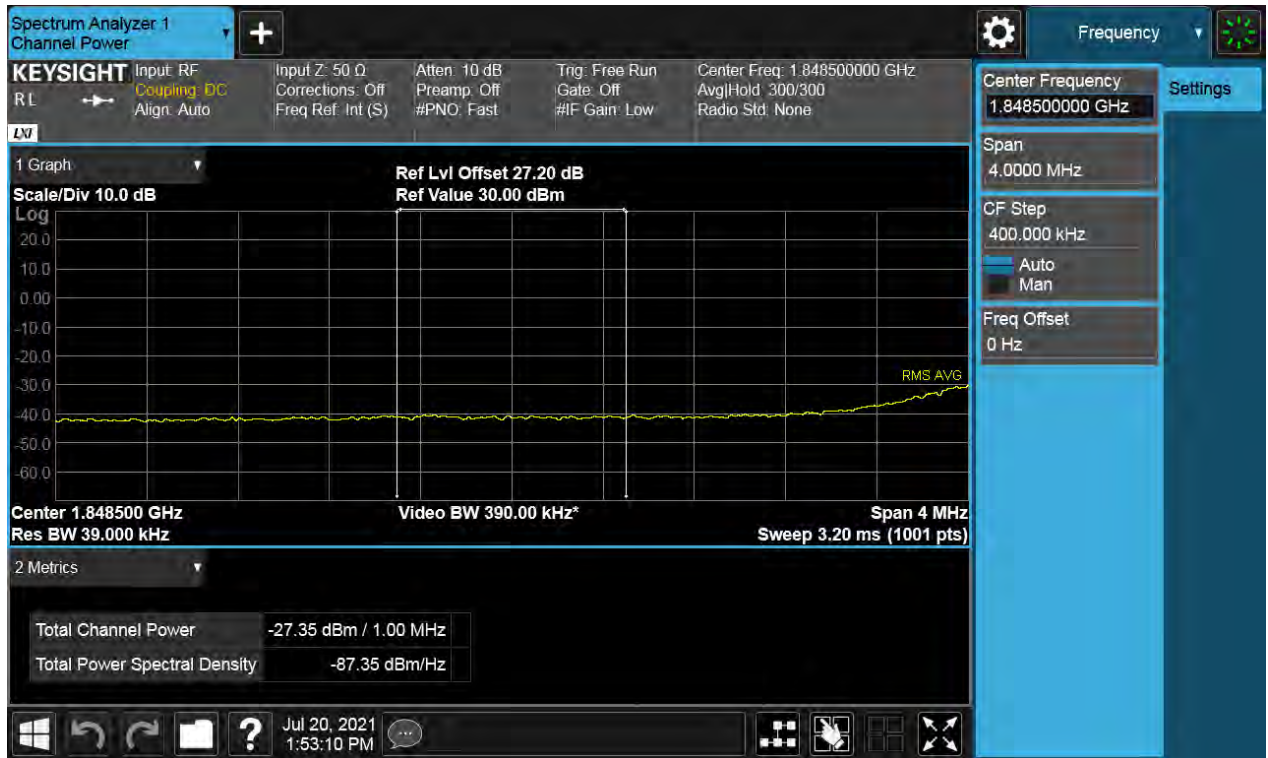

BW 15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW 15 M_BandEdge_Highest Channel_QPSK_FullIRB(2)

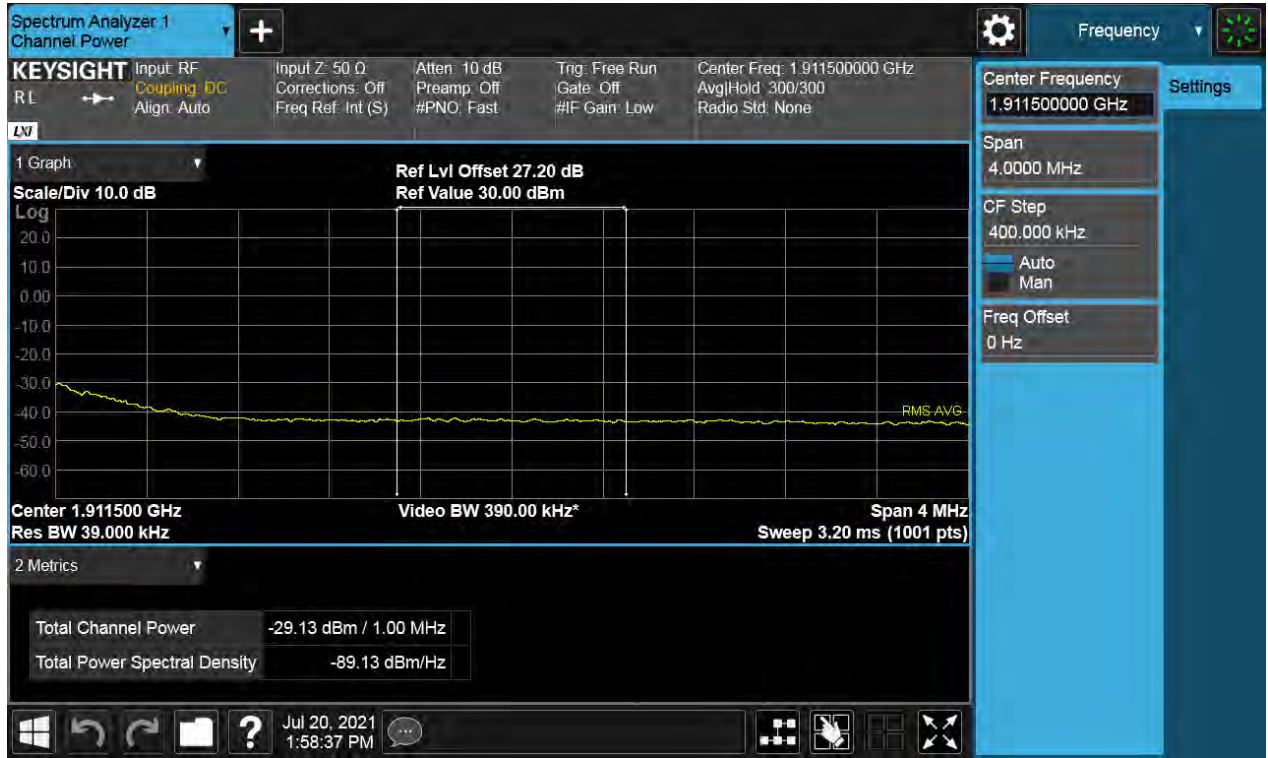


BW 15 M_BandEdge_Lowest Channel_QPSK_1RB



BW 20 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW 20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

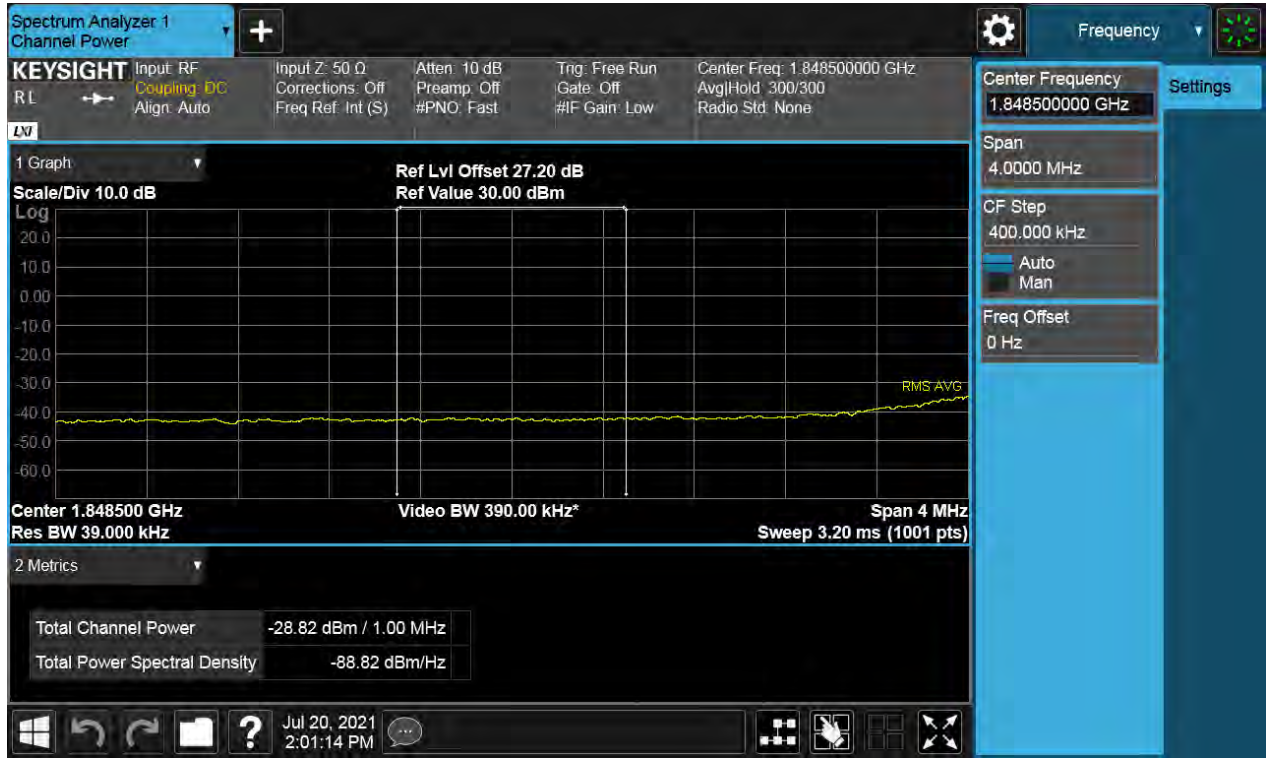

BW 20 M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW 20 M_BandEdge_Highest Channel_QPSK_FullIRB(2)

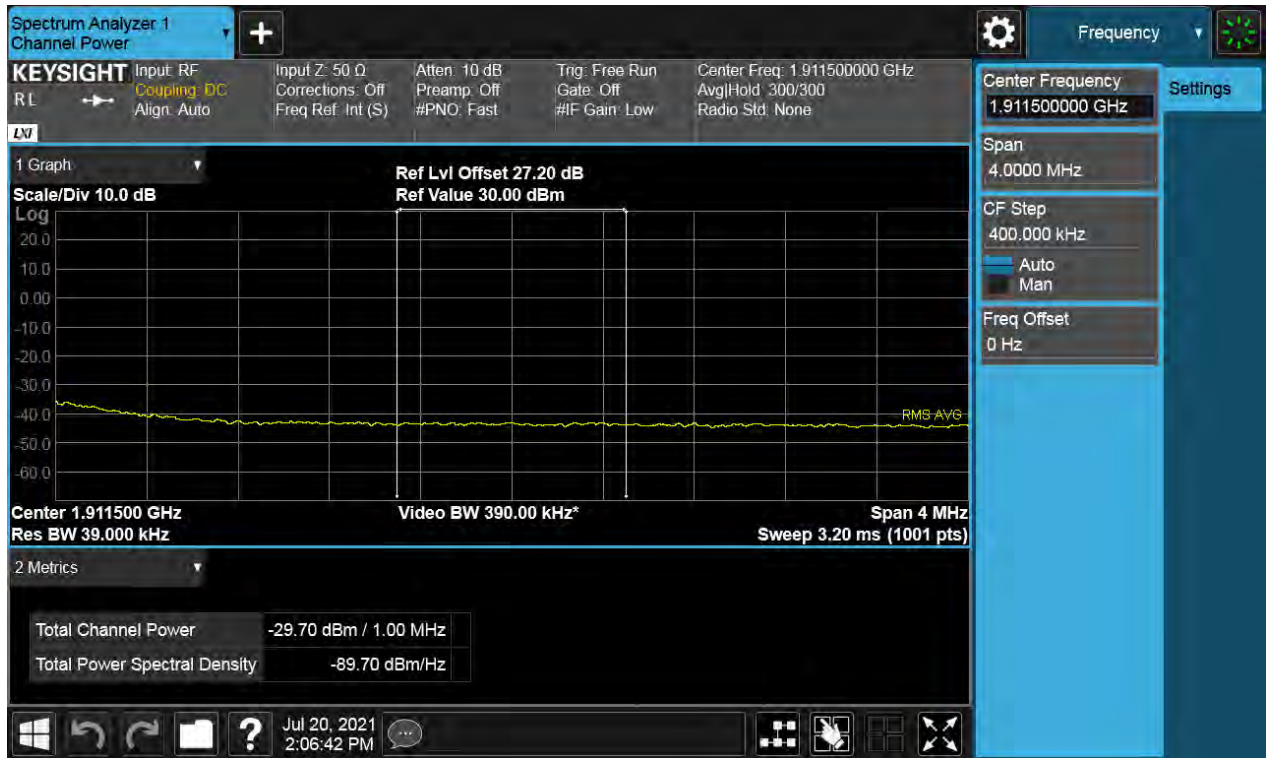

BW 20 M_BandEdge_Lowest Channel_QPSK_1RB



BW 20 M_BandEdge_Highest Channel_QPSK_1RB




BW 1.4 M_OBW_Middle Channel_QPSK_FullIRB



BW 1.4 M_OBW_Middle Channel_16QAM_FullRB



BW 1.4 M_OBW_Middle Channel_64QAM_FullRB

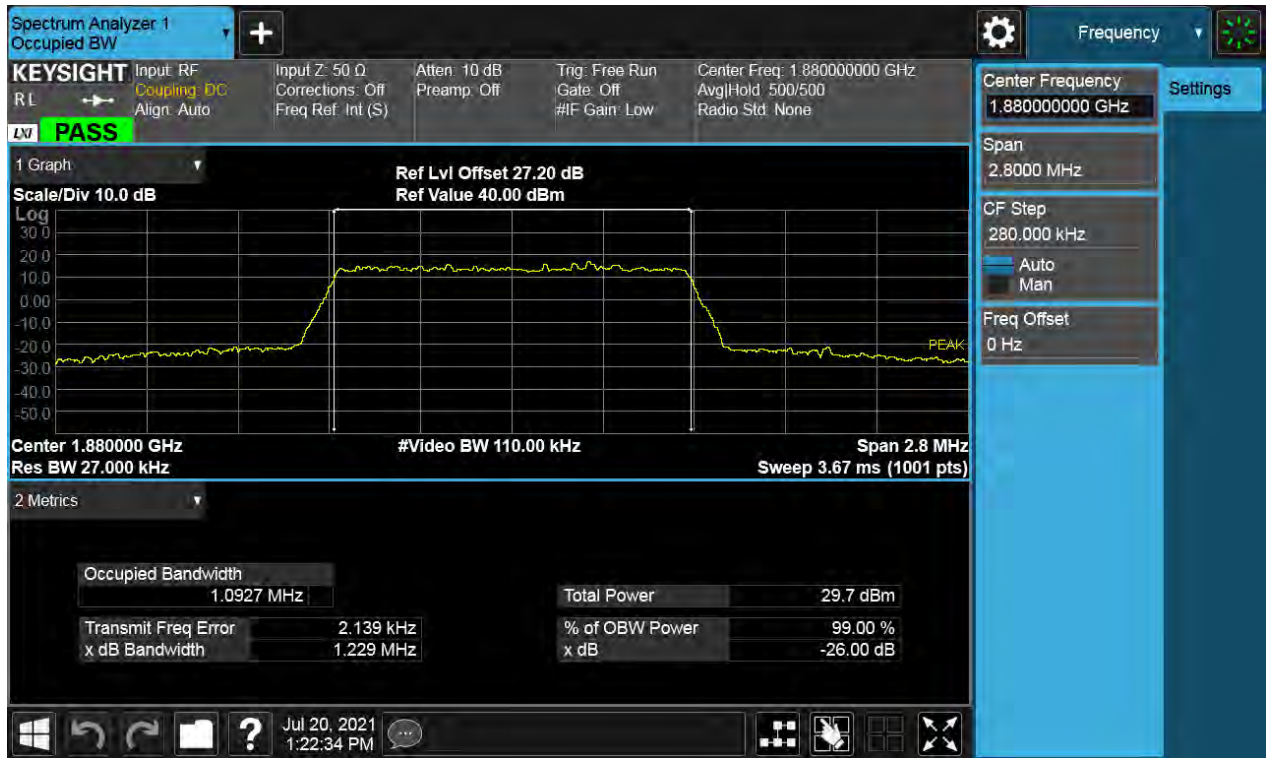

BW 3 M_OBW_Middle Channel_QPSK_FullIRB



BW 3 M_OBW_Middle Channel_16QAM_FullIRB




BW 3 M_OBW_Middle Channel_64QAM_FullIRB




BW 5 M_OBW_Middle Channel_QPSK_FullRB



BW 5 M_OBW_Middle Channel_16QAM_FullIRB

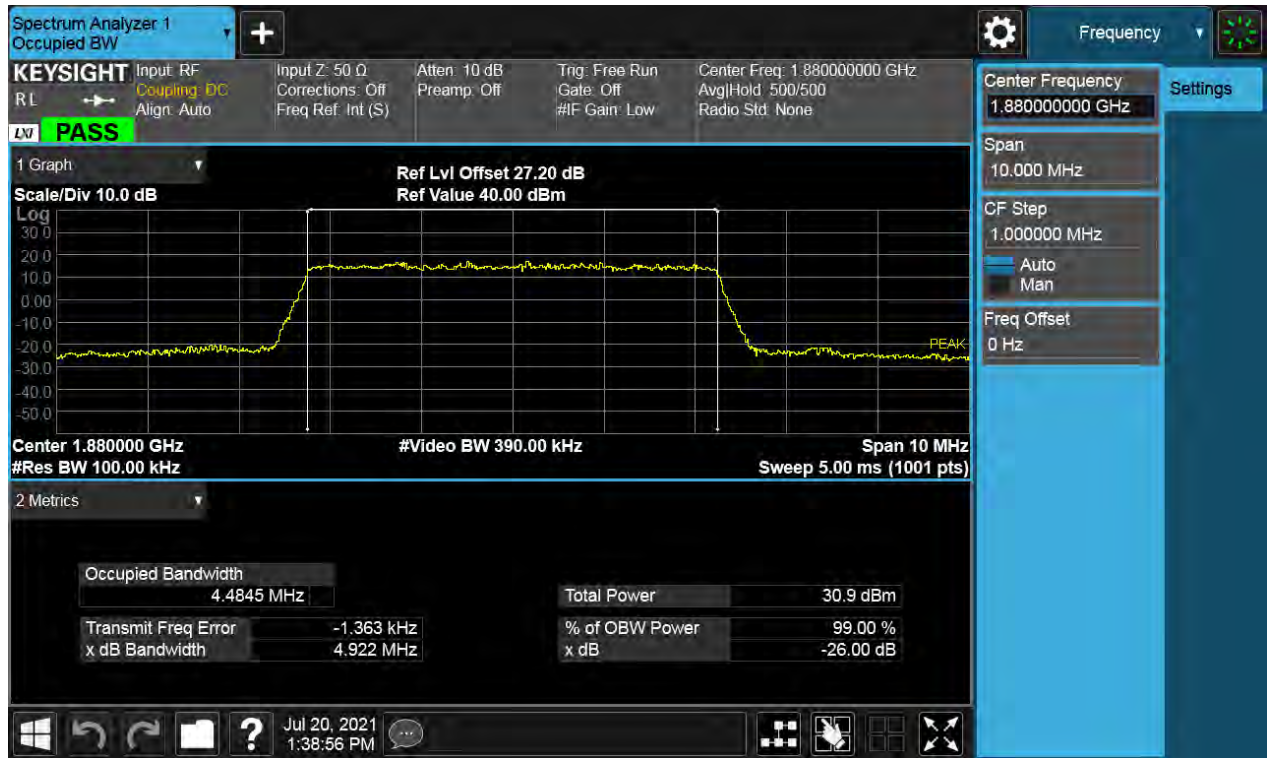


BW 5 M_OBW_Middle Channel_64QAM_FullIRB

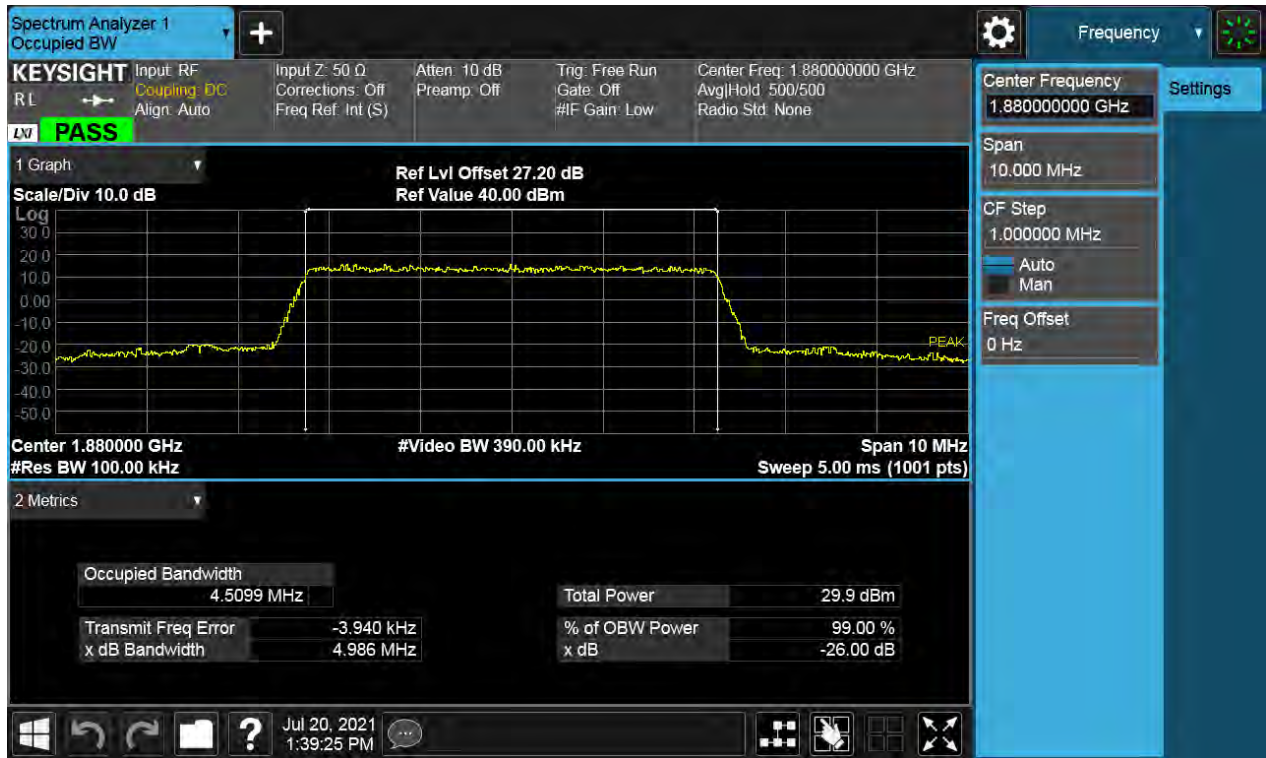


BW 10 M_OBW_Middle Channel_QPSK_FullIRB




BW 10 M_OBW_Middle Channel_16QAM_FullIRB

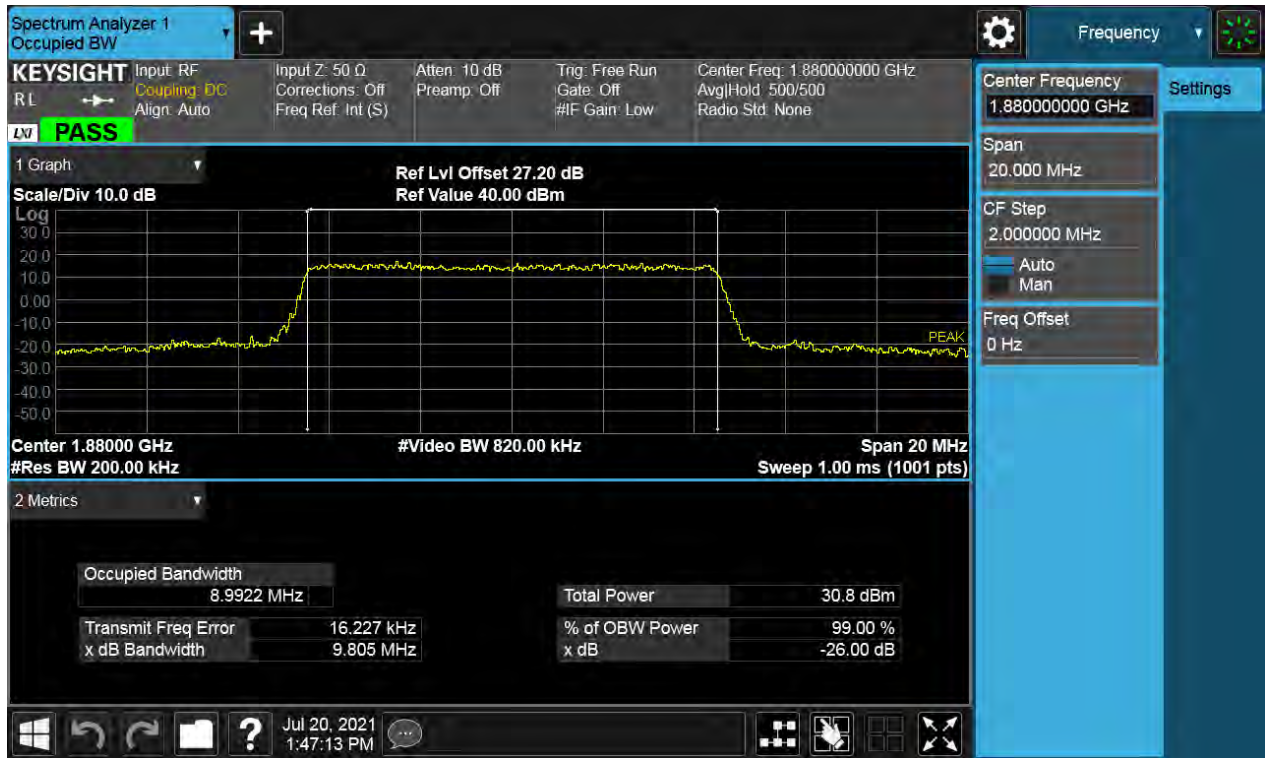


BW 10 M_OBW_Middle Channel_64QAM_FullIRB

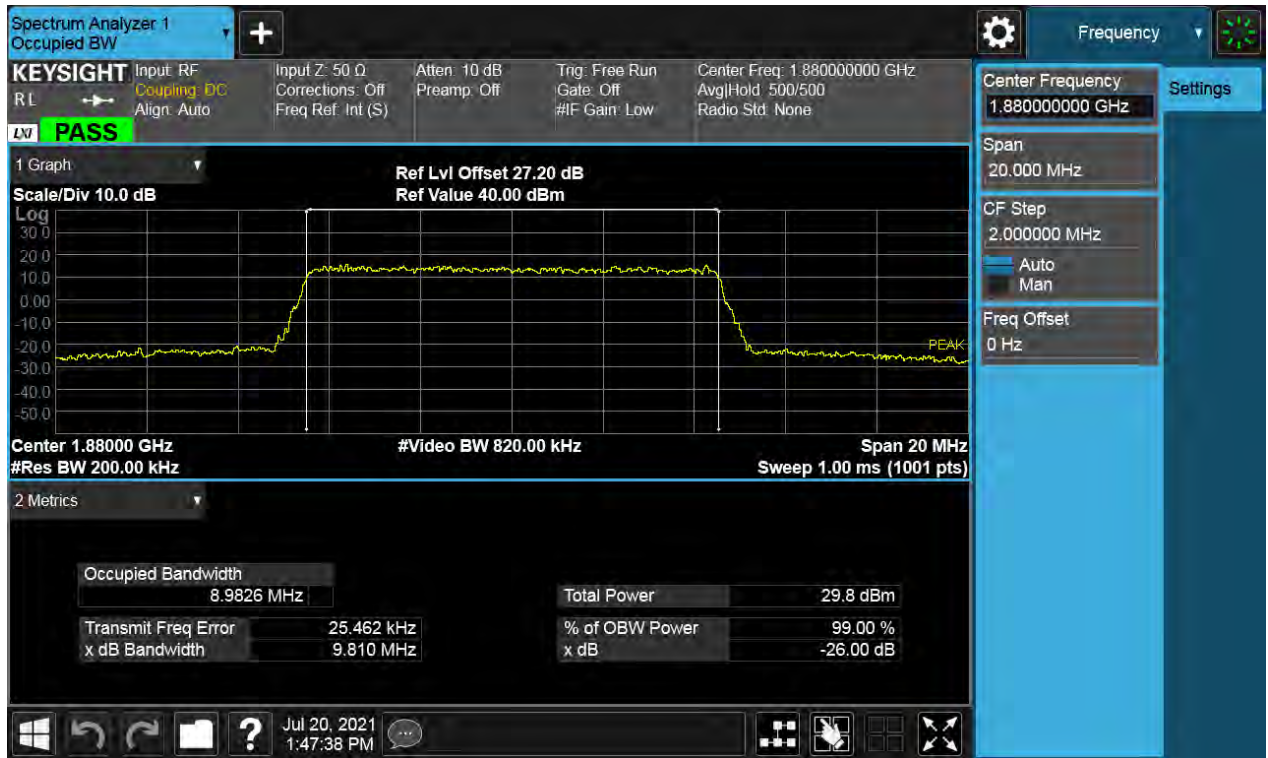


BW 15 M_OBW_Middle Channel_QPSK_FullIRB

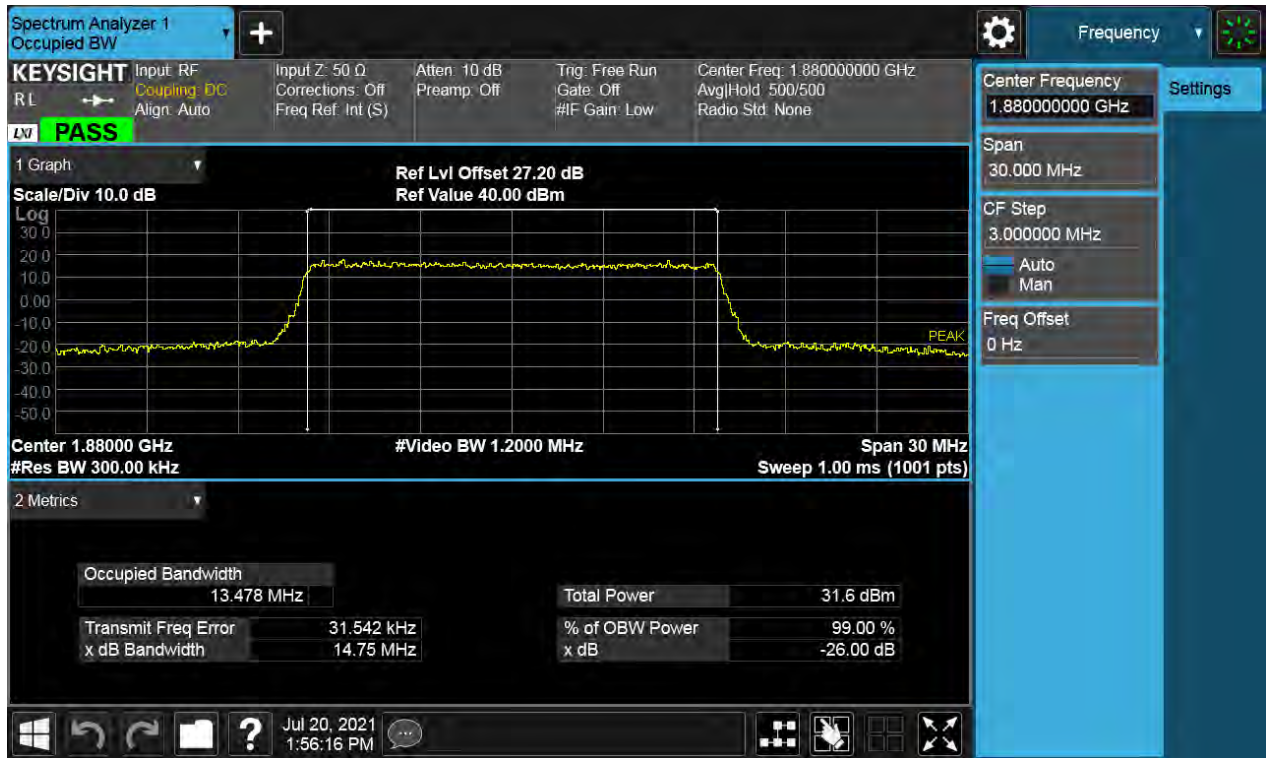


BW 15 M_OBW_Middle Channel_16QAM_FullIRB

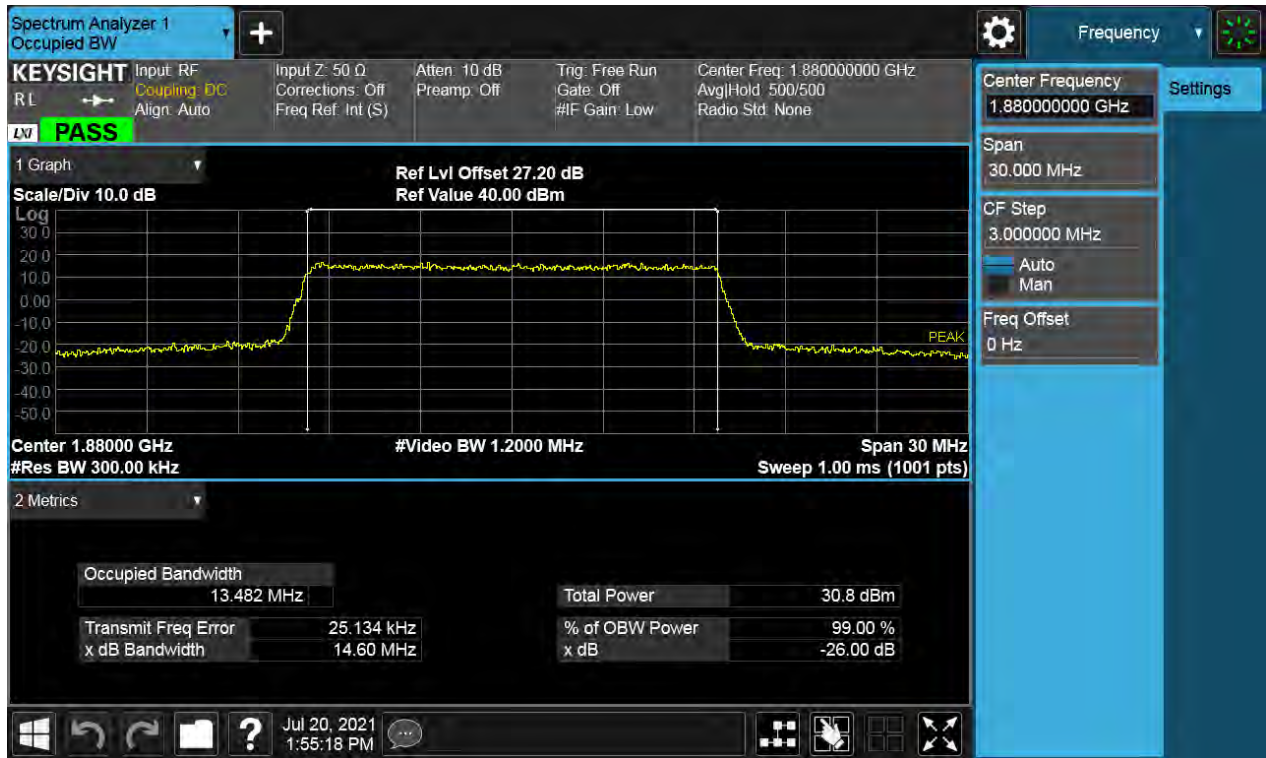


BW 15 M_OBW_Middle Channel_64QAM_FullIRB

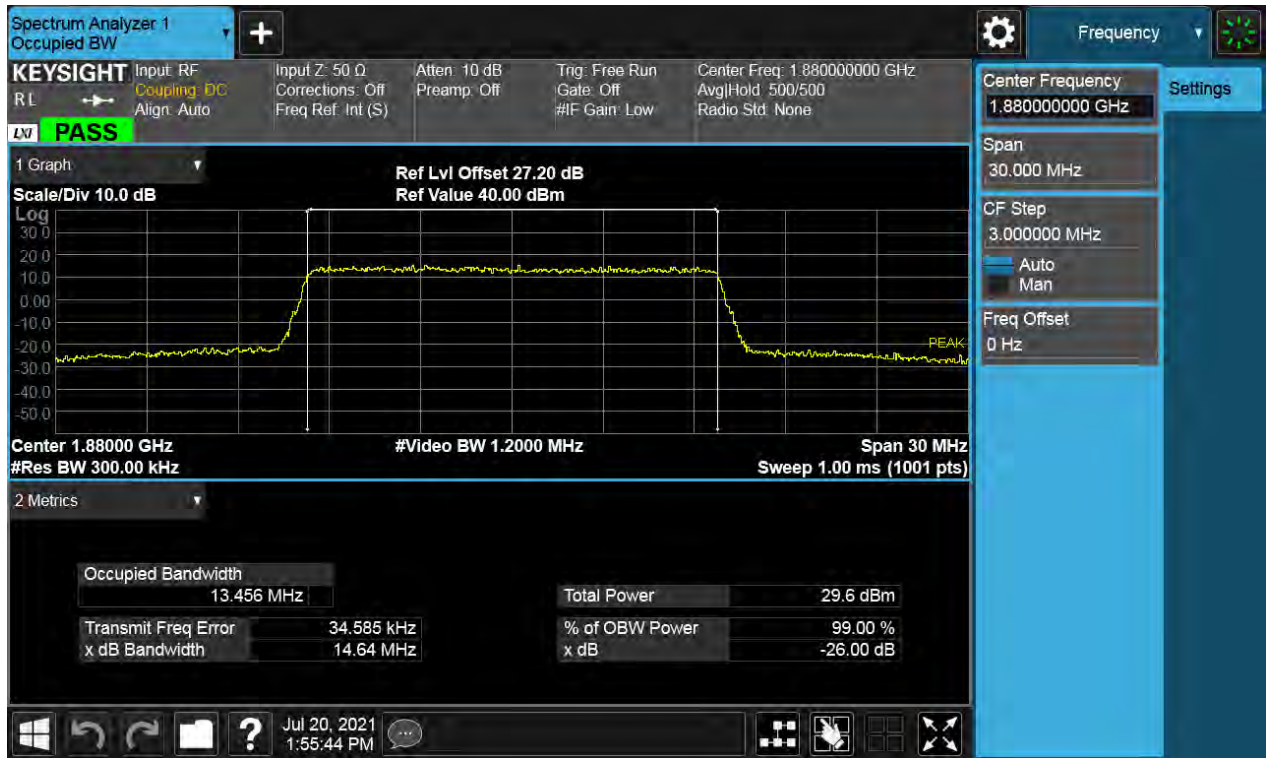

BW 20 M_OBW_Middle Channel_QPSK_FullIRB

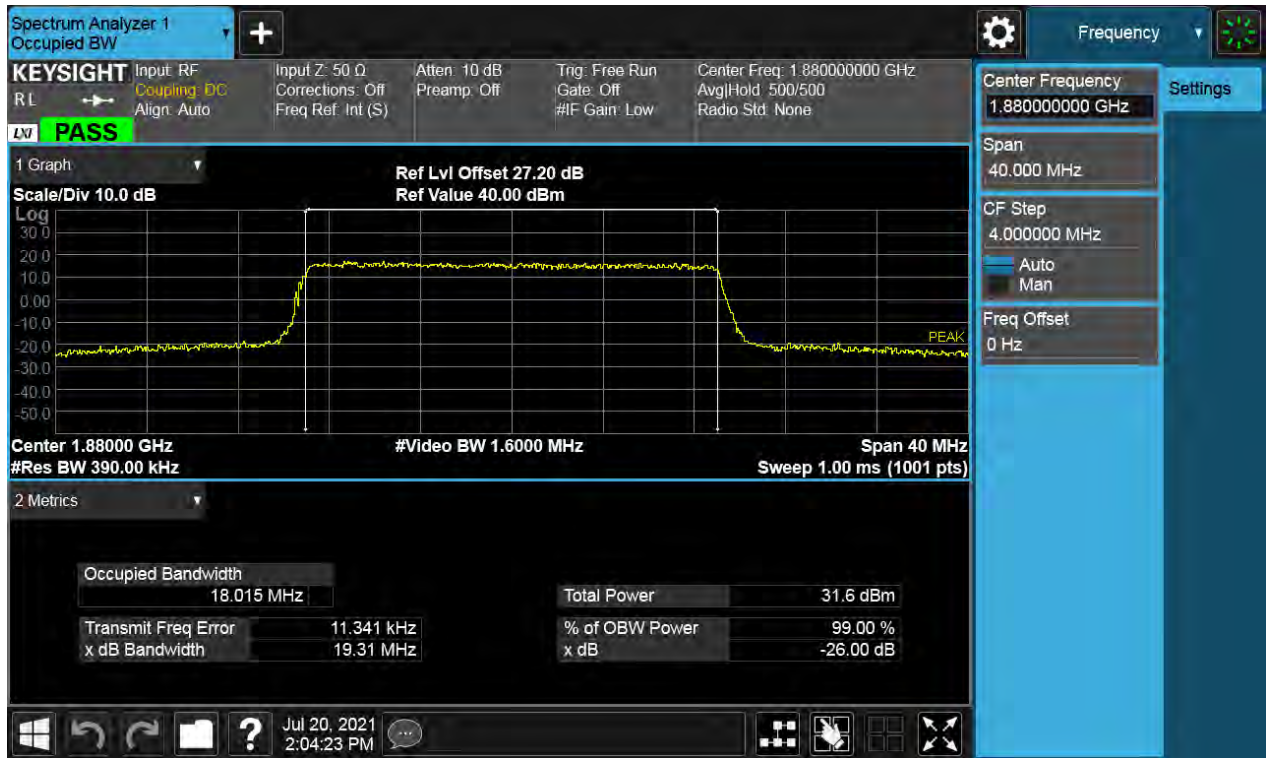


BW 20 M_OBW_Middle Channel_16QAM_FullIRB

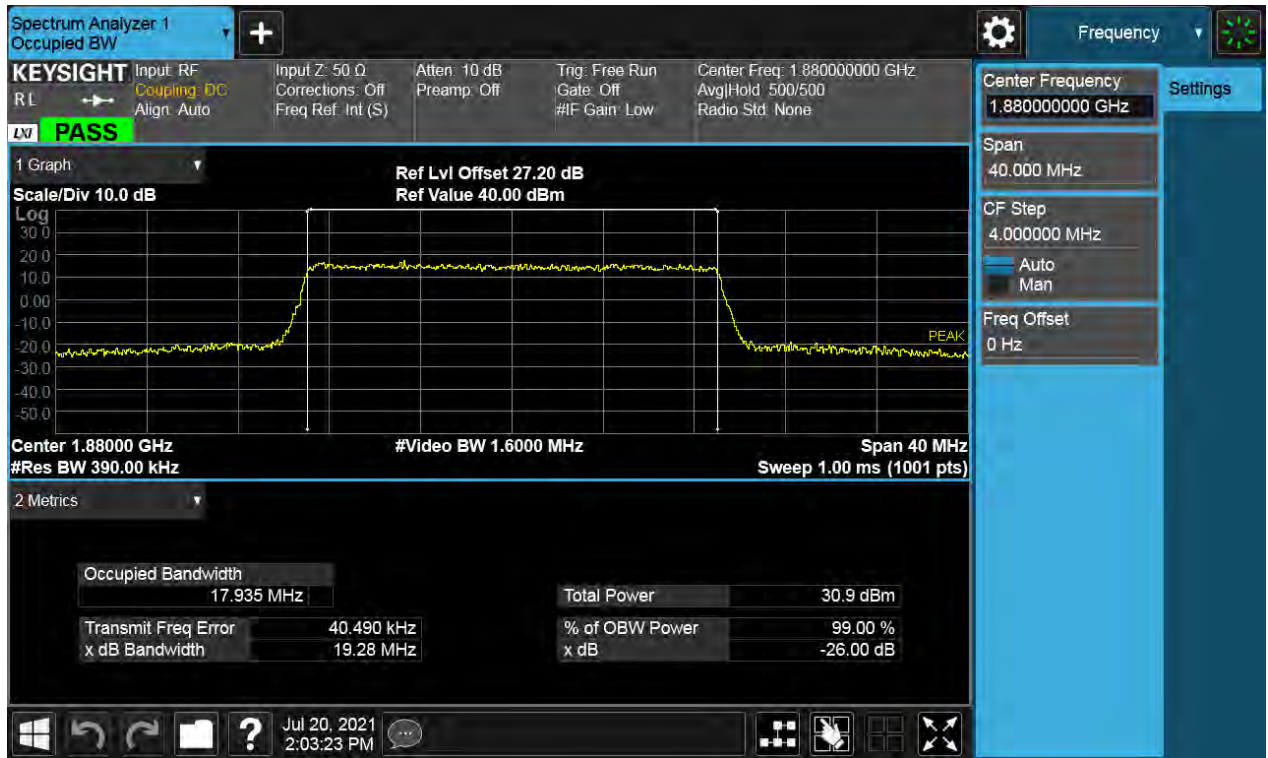

BW 20 M_OBW_Middle Channel_64QAM_FullIRB



BW 1.4 M_PAR_Middle Channel_QPSK_FullRB

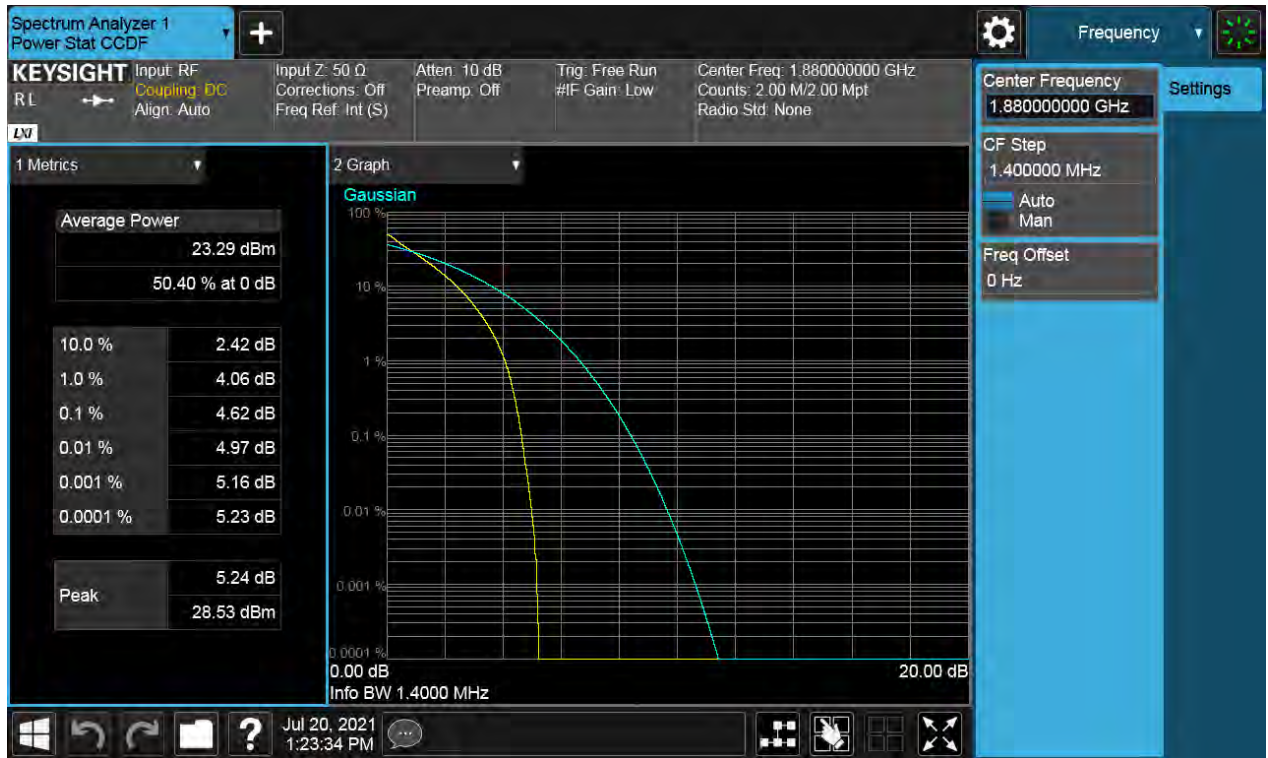


BW 1.4 M_PAR_Middle Channel_16QAM_FullIRB



BW 1.4 M_PAR_Middle Channel_64QAM_FullIRB




BW 3 M_PAR_Middle Channel_QPSK_FullRB

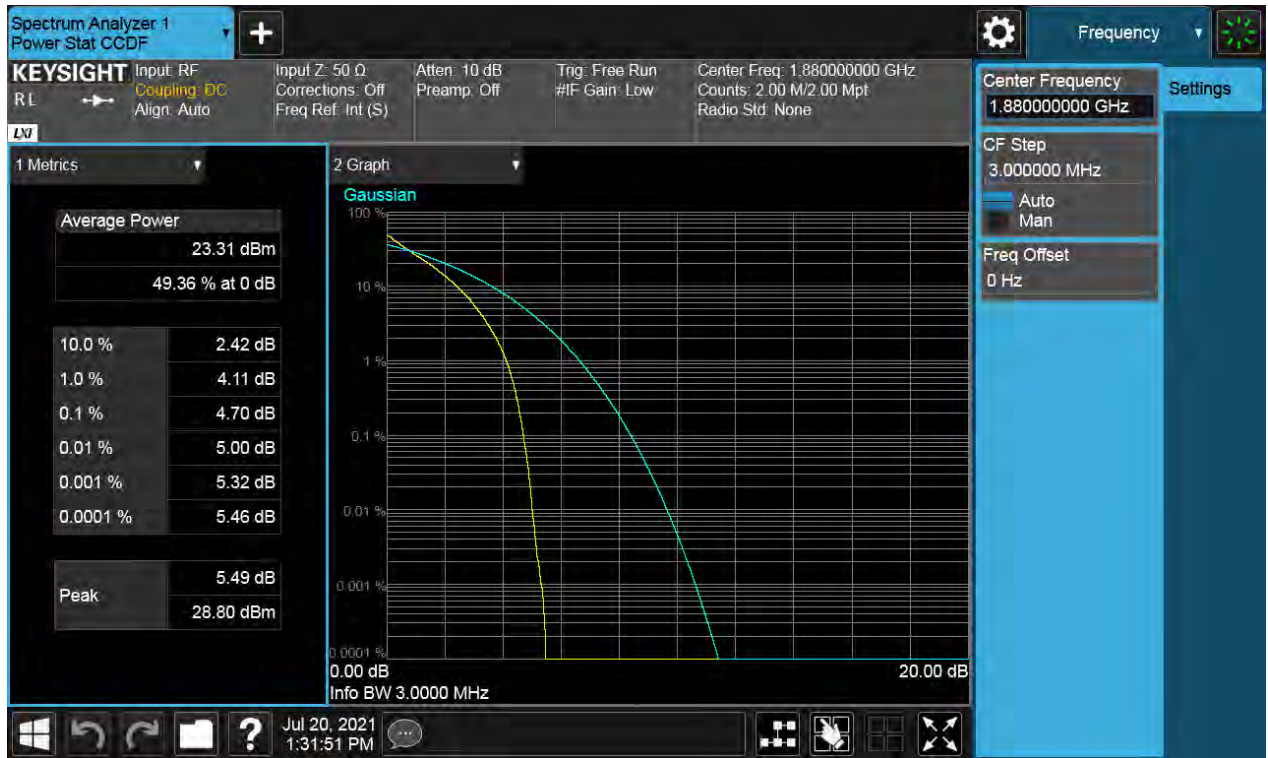

BW 3 M_PAR_Middle Channel_16QAM_FullIRB




BW 3 M_PAR_Middle Channel_64QAM_FullIRB

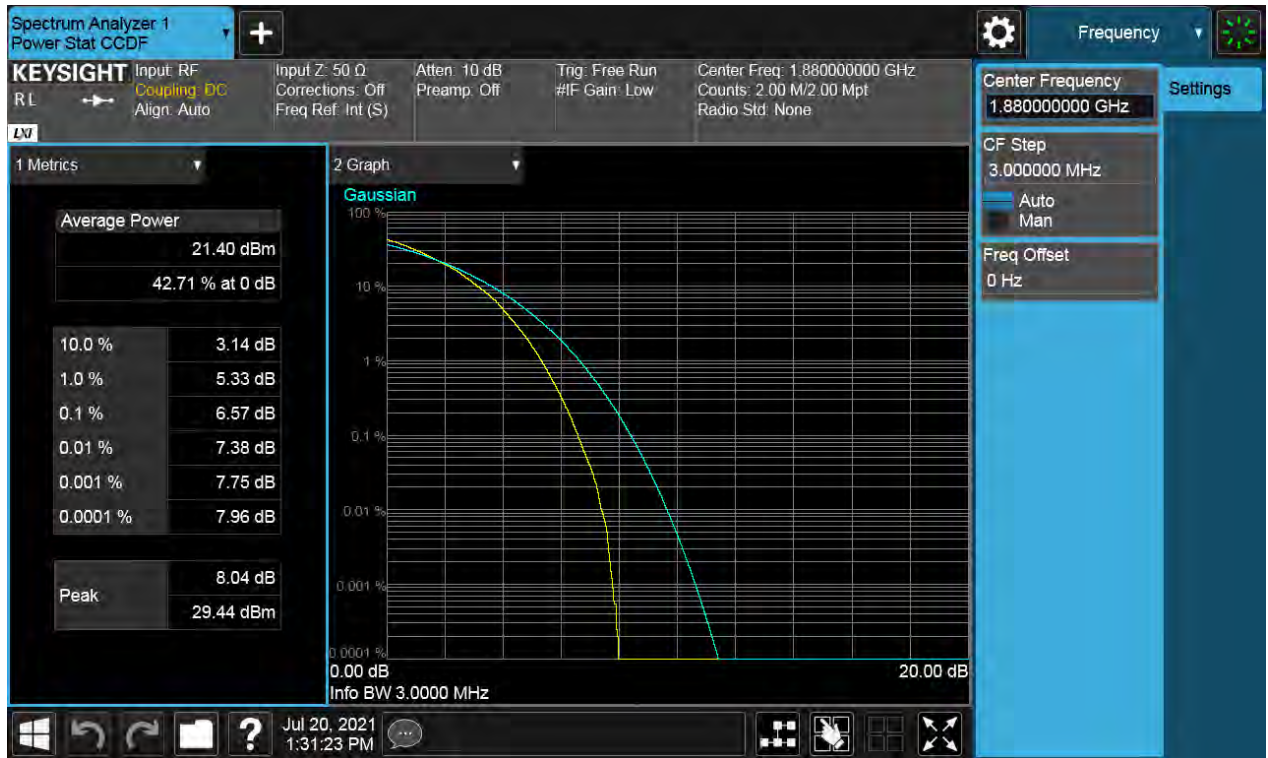

BW 5 M_PAR_Middle Channel_QPSK_FullRB




BW 5 M_PAR_Middle Channel_16QAM_FullIRB

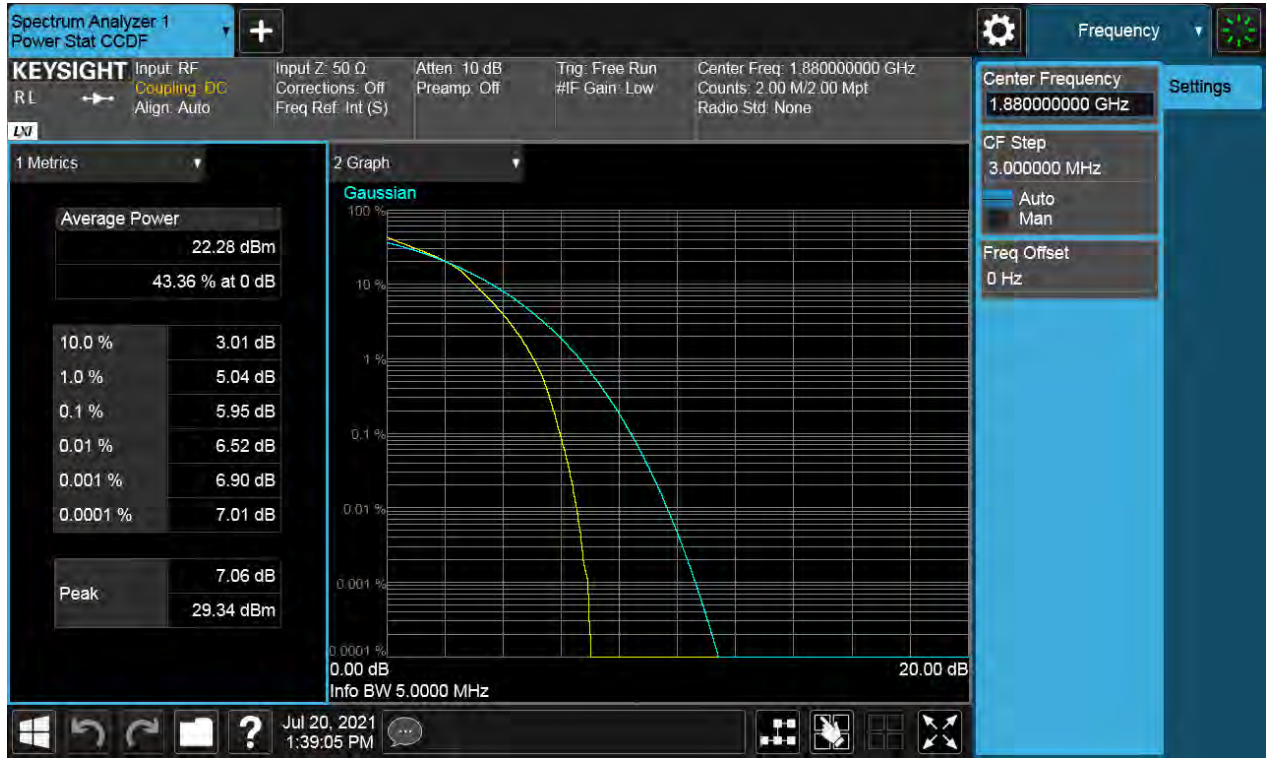


BW 5 M_PAR_Middle Channel_64QAM_FullIRB




BW 10 M_PAR_Middle Channelz_QPSK_FullIRB

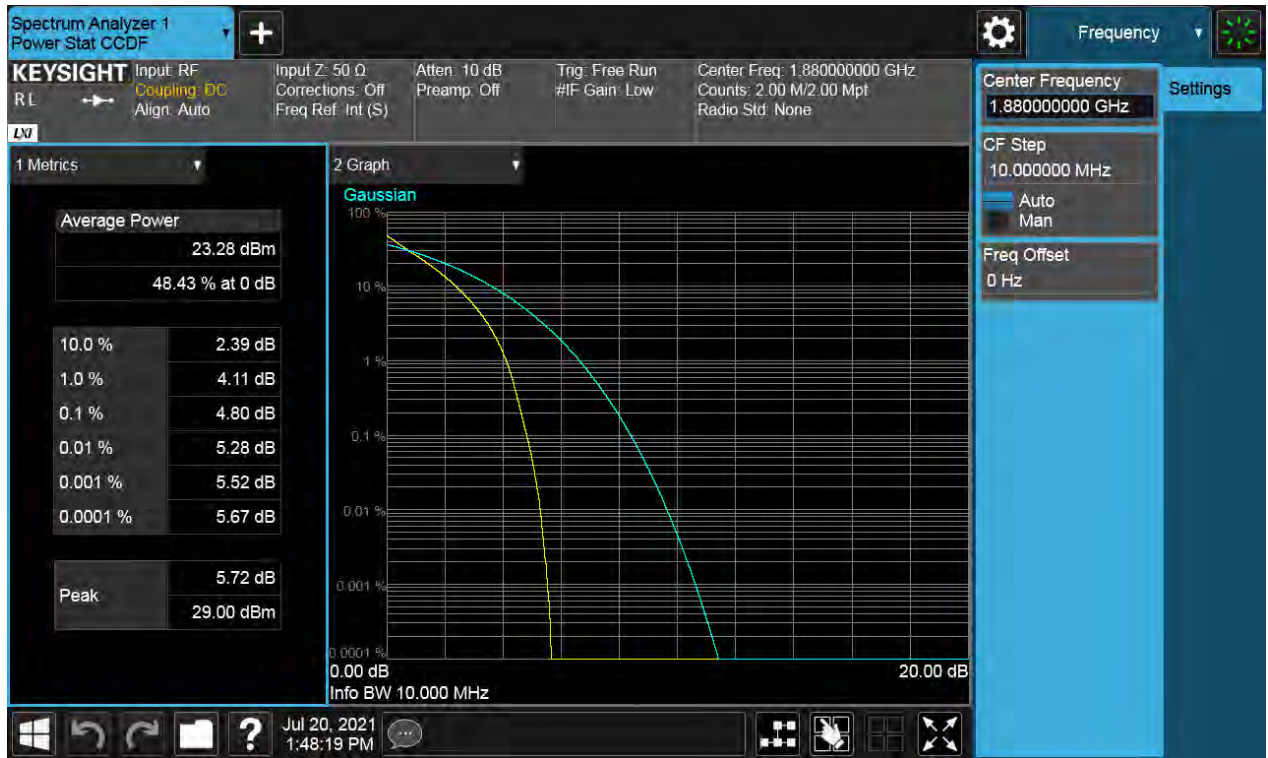


BW 10 M_PAR_Middle Channel_16QAM_FullIRB

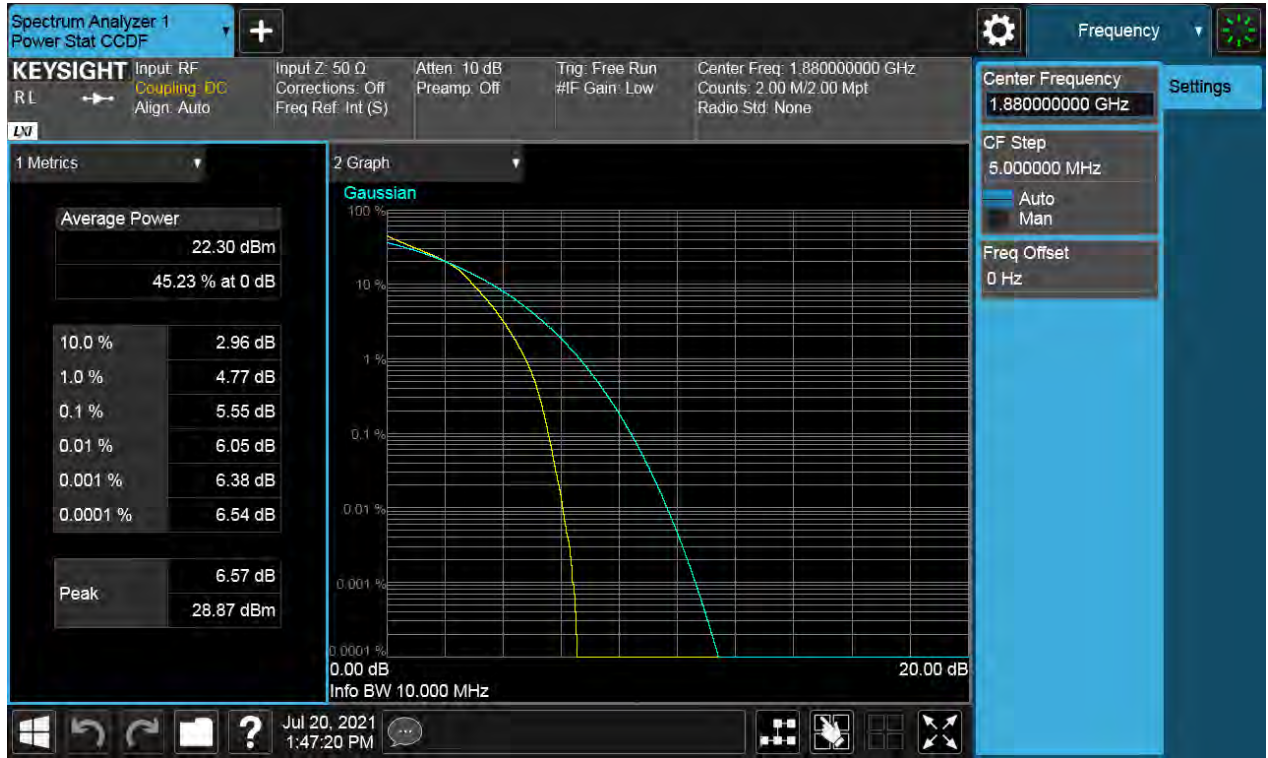


BW 10 M_PAR_Middle Channel_64QAM_FullIRB

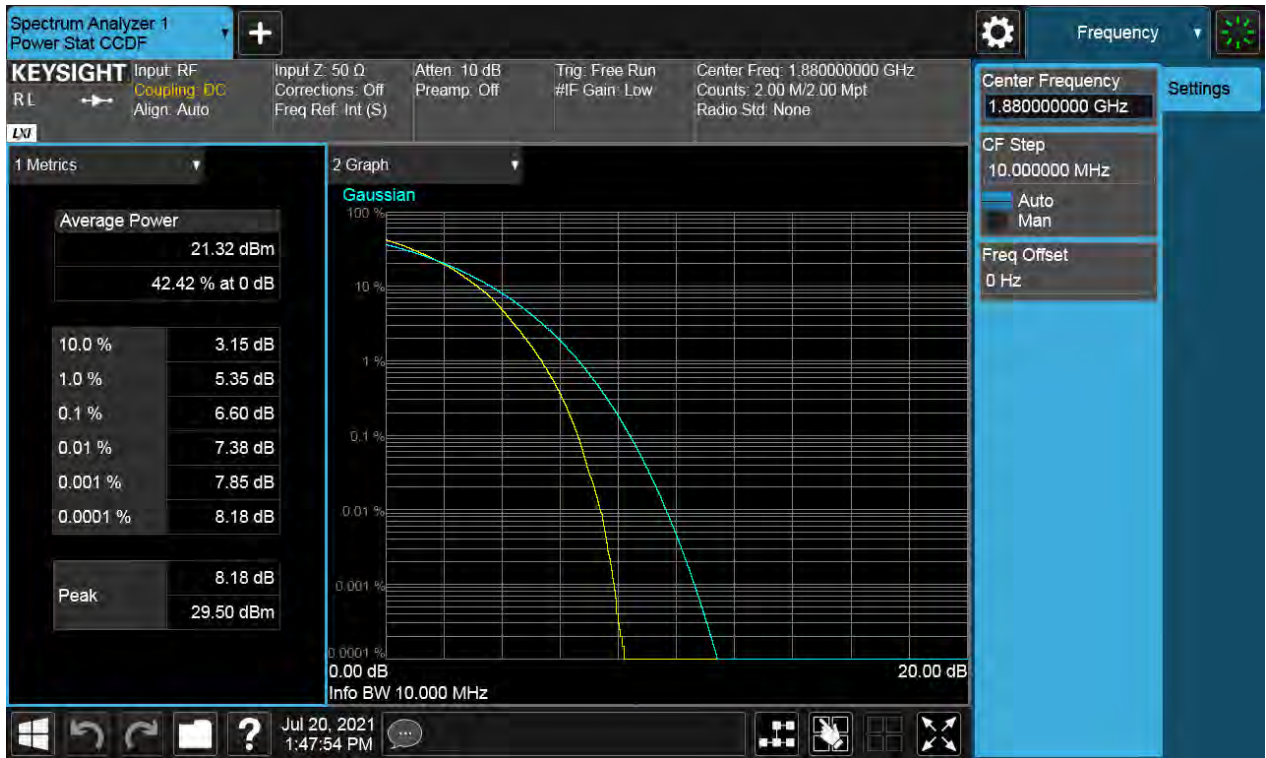

BW 15 M_PAR_Middle Channel_QPSK_FullIRB

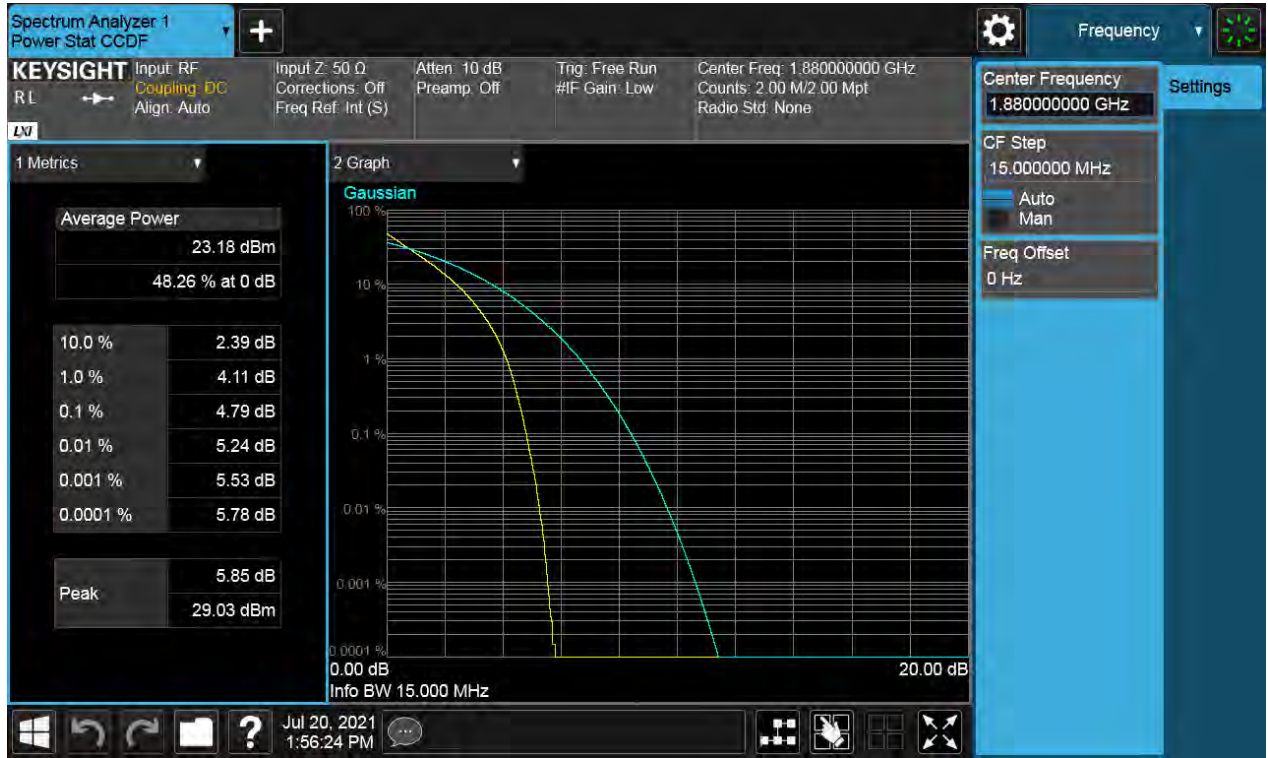


BW 15 M_PAR_Middle Channel_16QAM_FullIRB

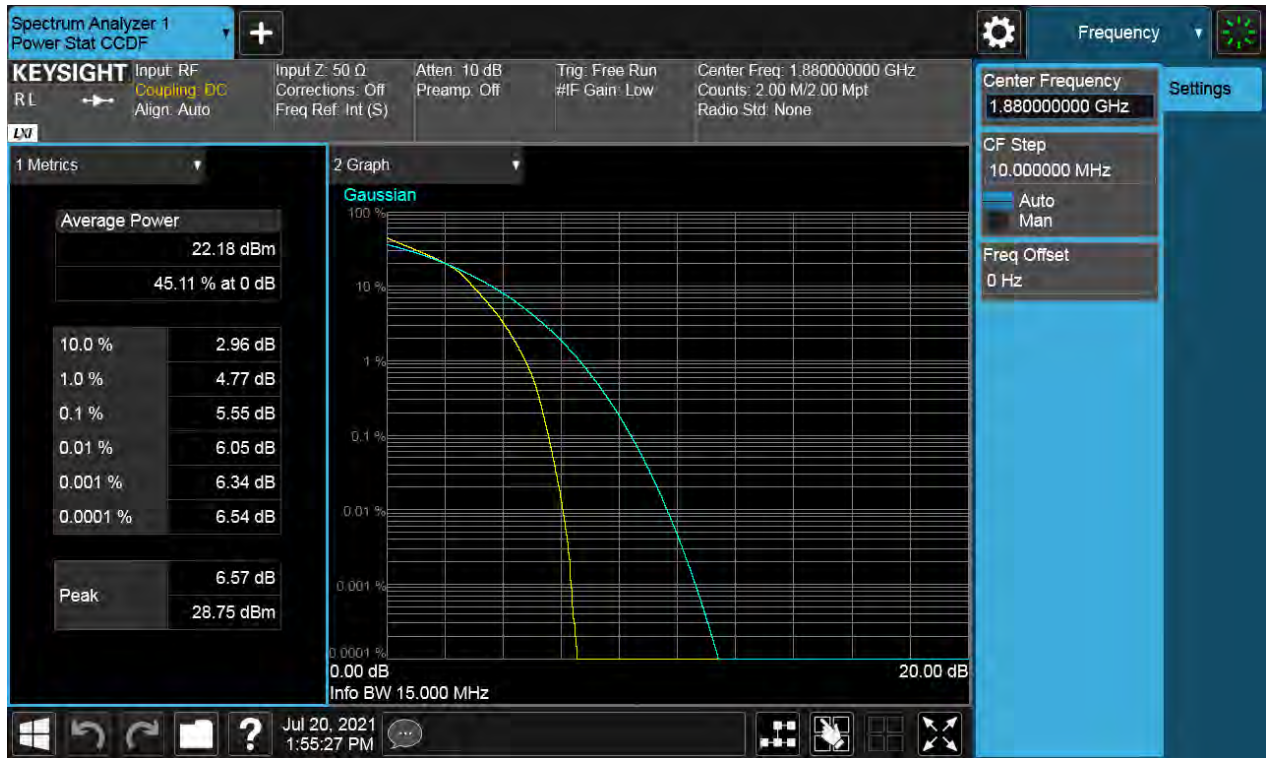

BW 15 M_PAR_Middle Channel_64QAM_FullIRB



BW 20 M_PAR_Middle Channel_QPSK_FullIRB

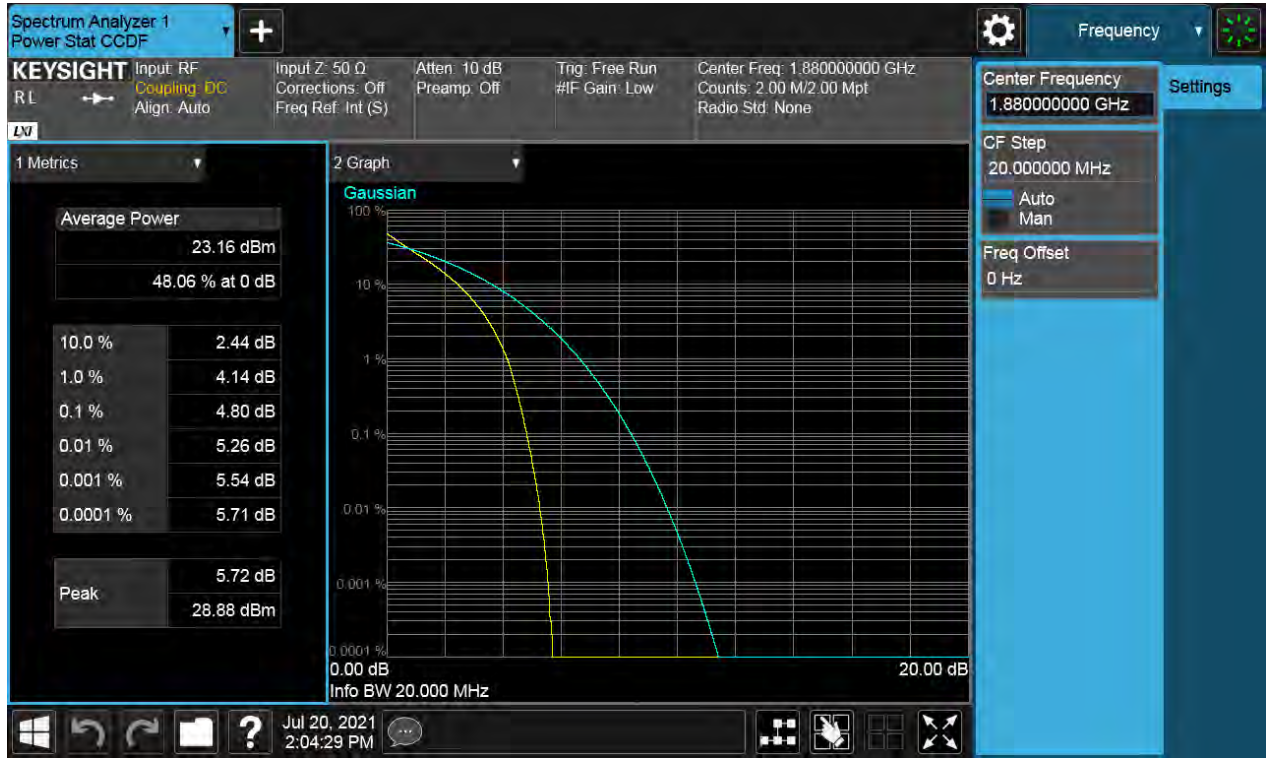


BW 20 M_PAR_Middle Channel_16QAM_FullIRB




BW 20 M_PAR_Middle Channel_64QAM_FullIRB




BW 1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

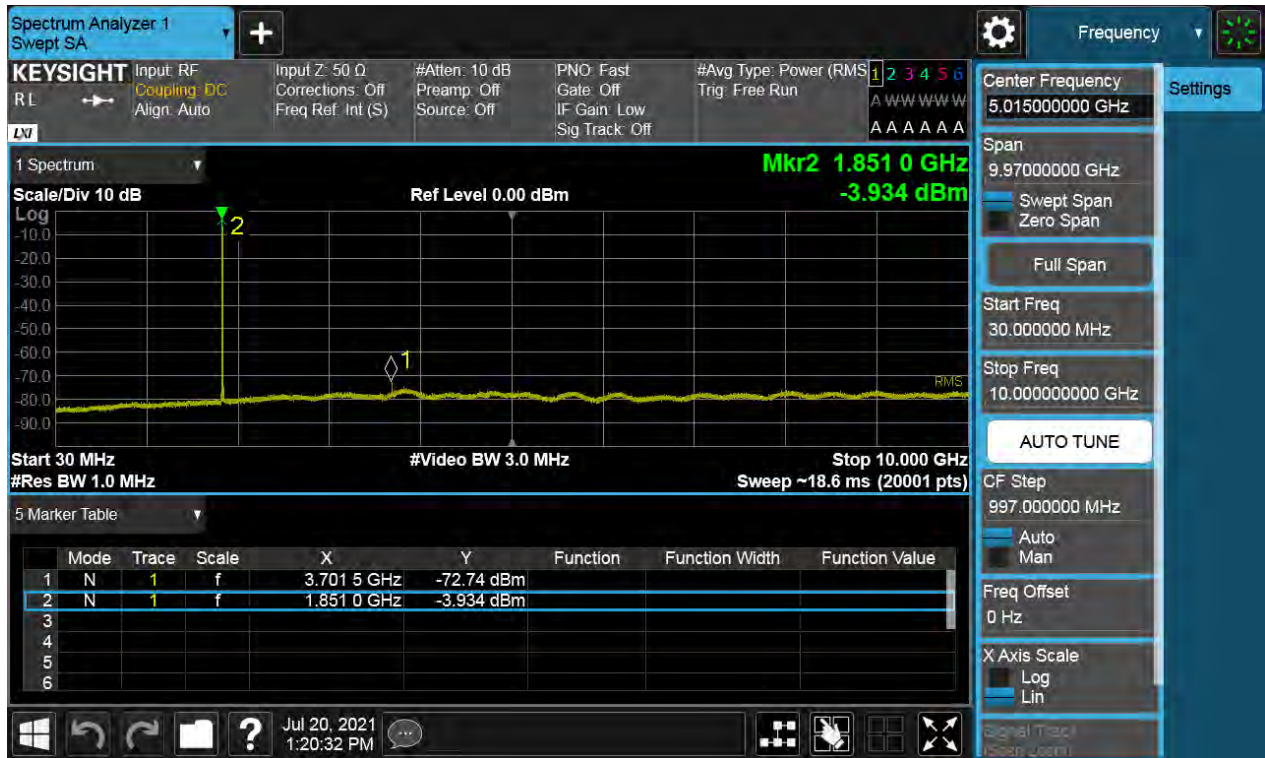


BW 1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

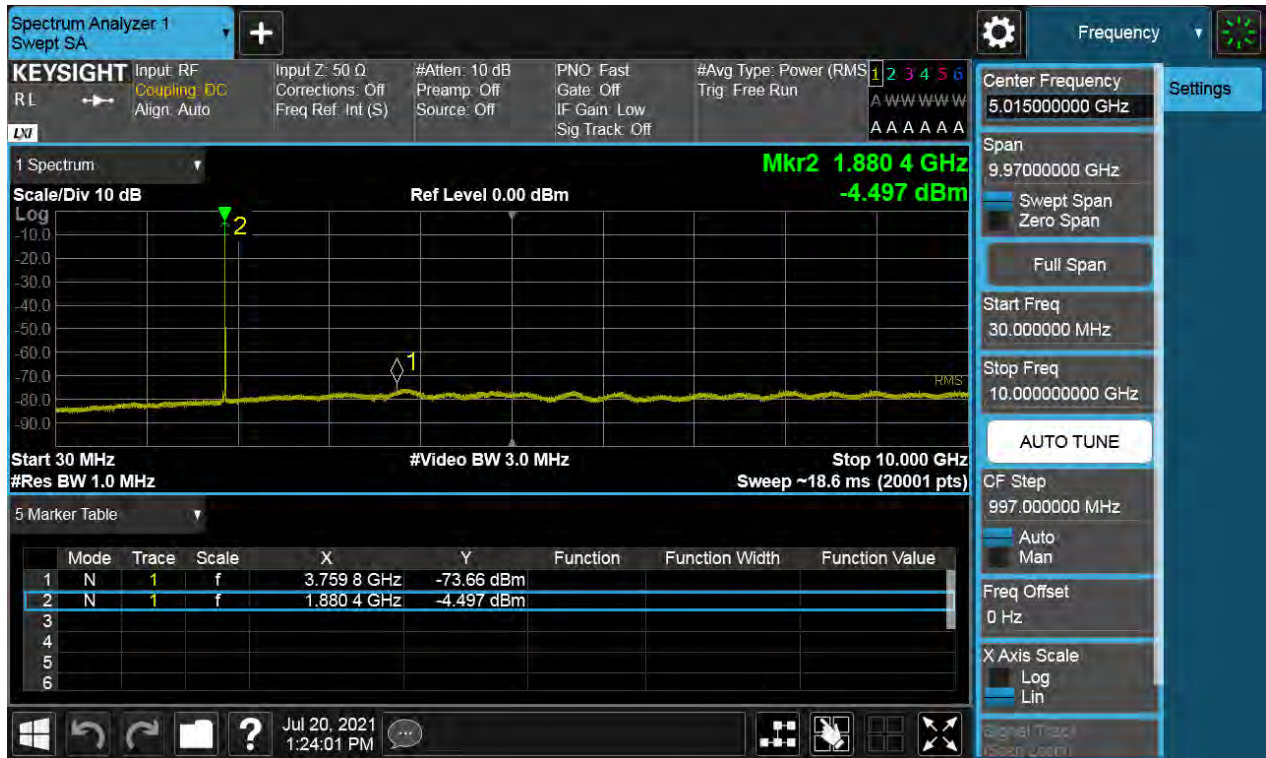


BW 1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

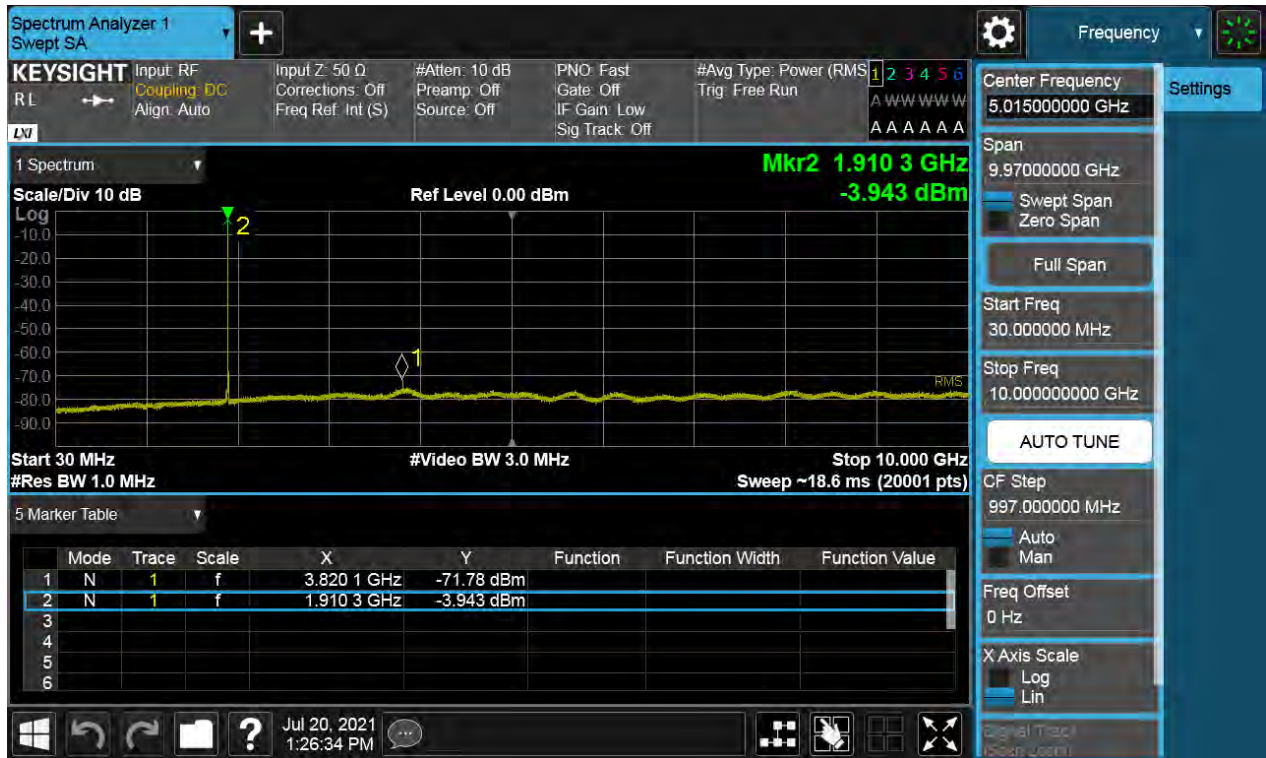


BW 3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

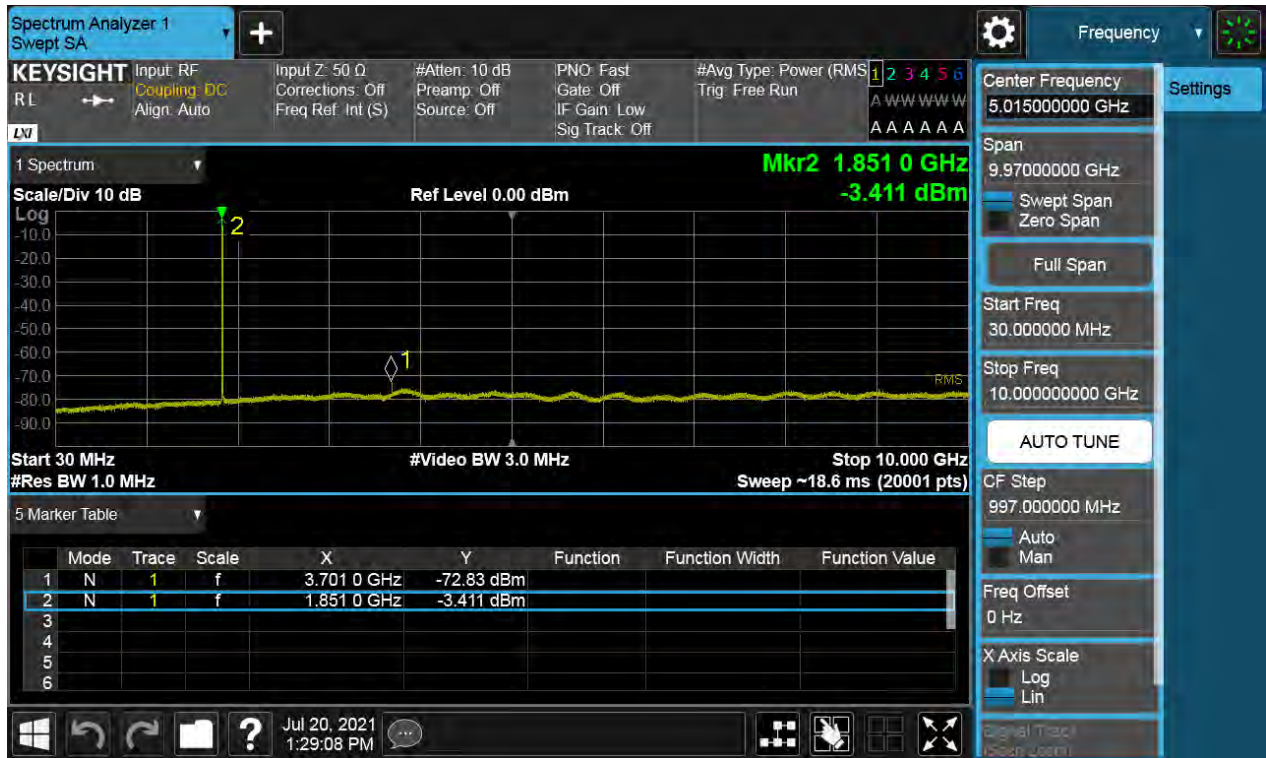


BW 3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

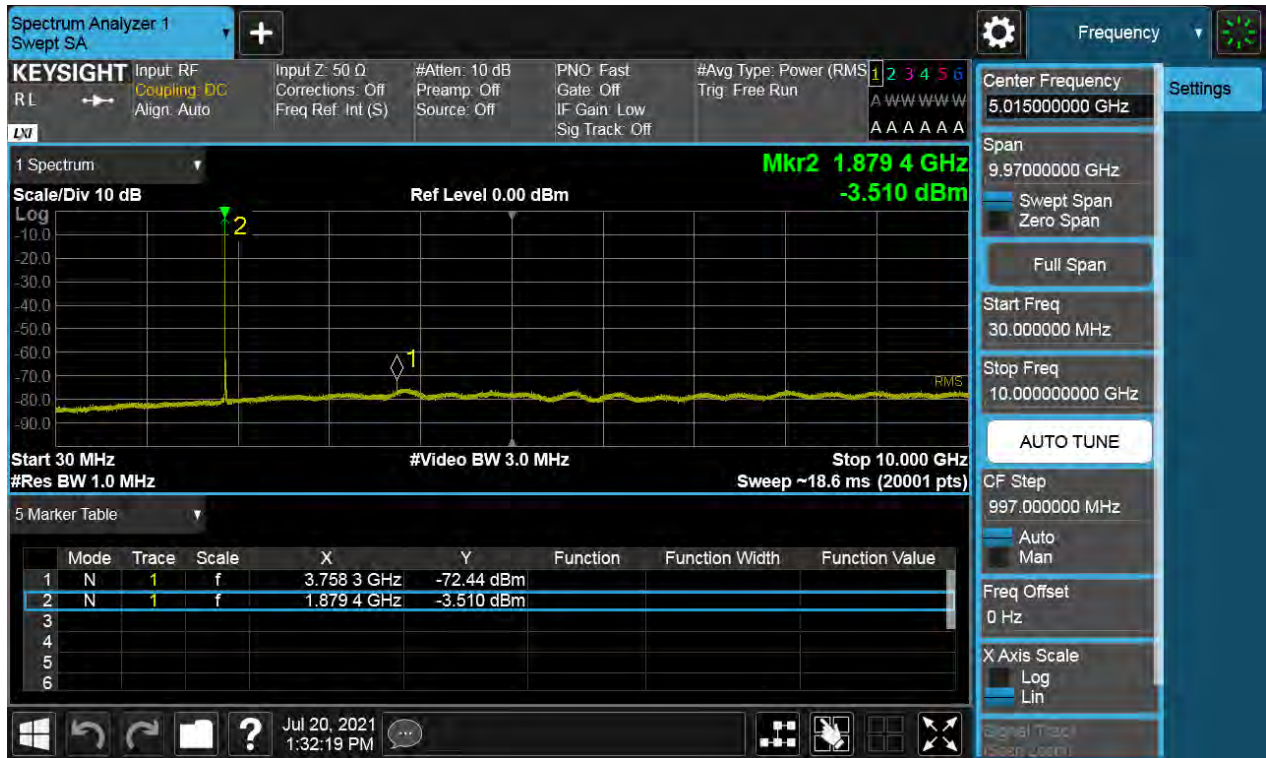

BW 3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

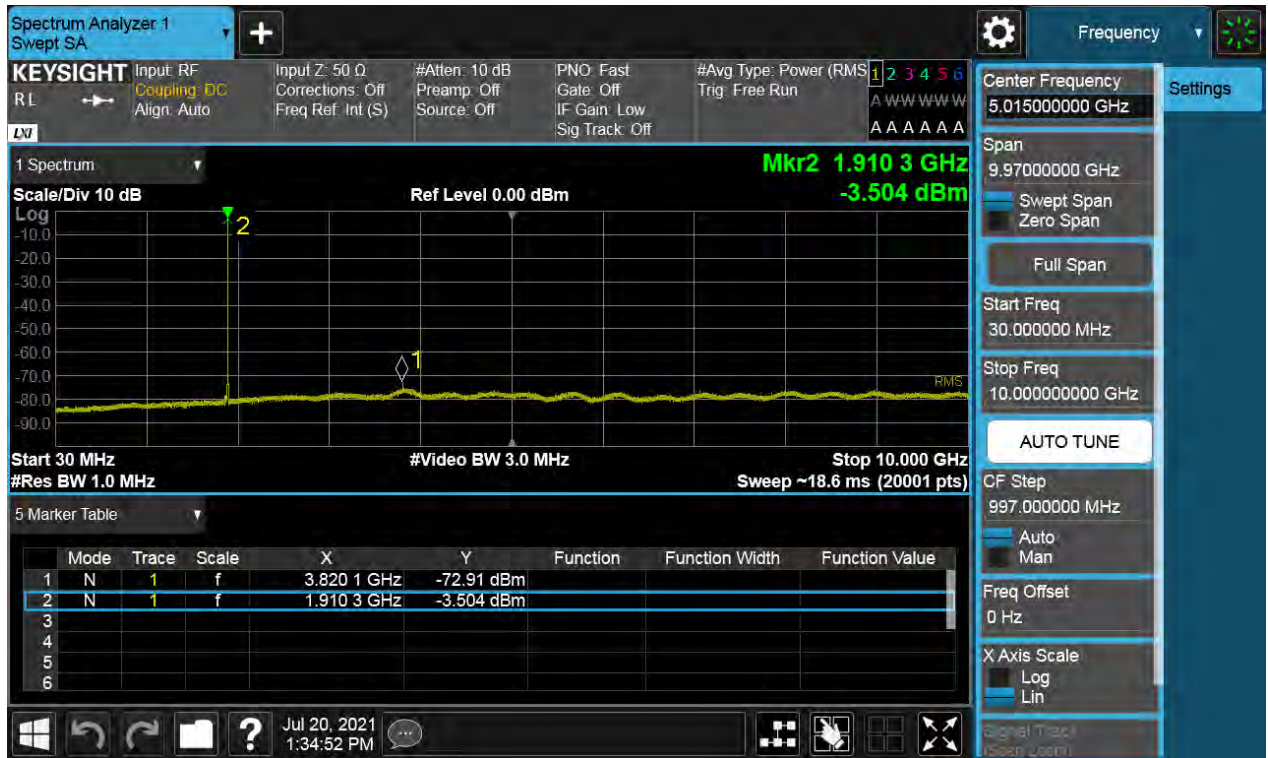


BW 5 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

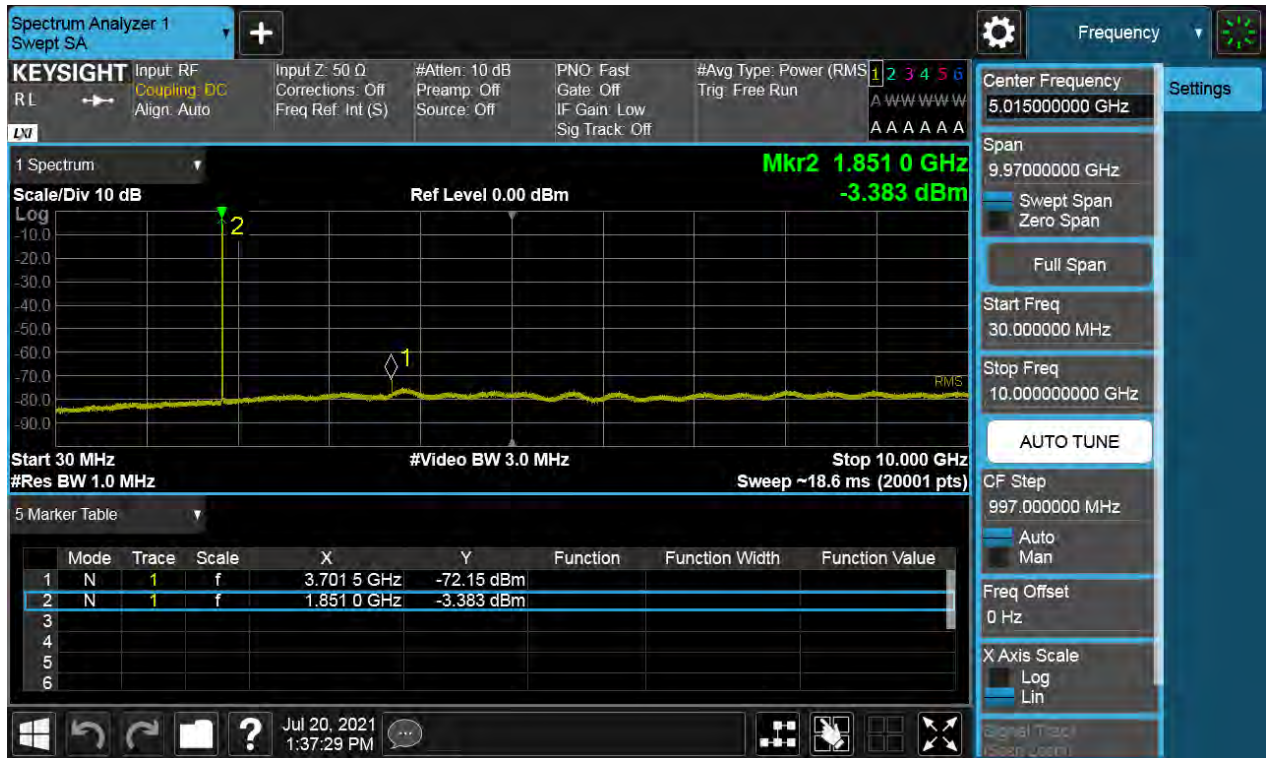

BW 5 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB



BW 5 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

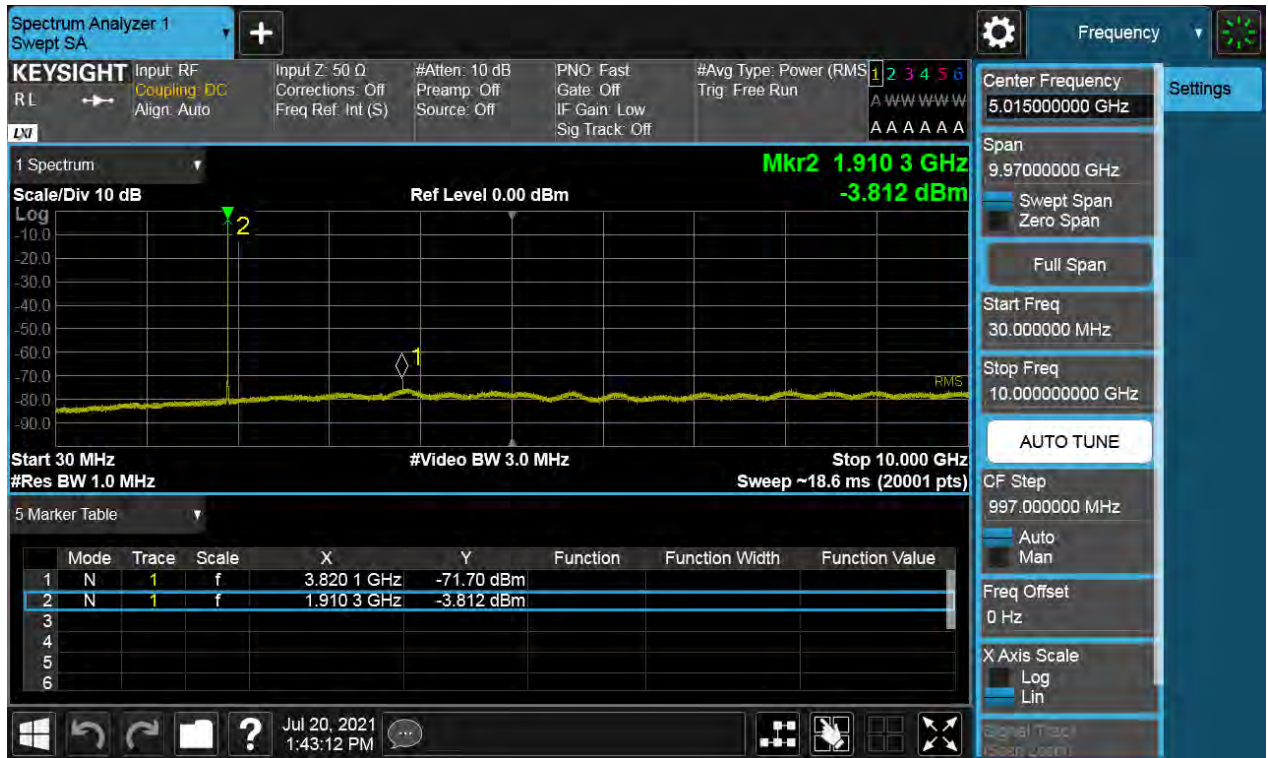

BW 10 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB



BW 10 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB



BW 10 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB



BW 15 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB



BW 15 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB




BW 15 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB



BW 20 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB



BW 20 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

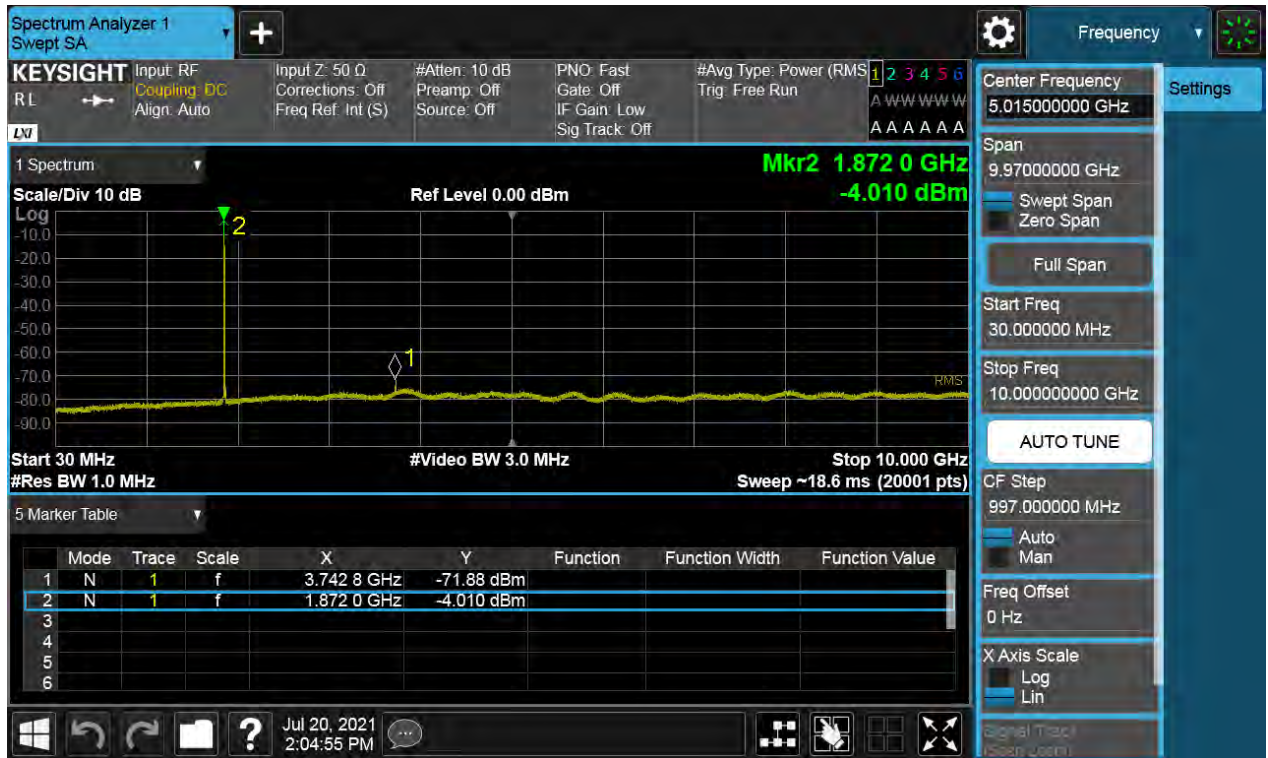

BW 20 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB



BW 1.4 M_CSE(10 G-20 G)_Lowest Channel_QPSK_1RB



BW 1.4 M_CSE(10 G-20 G)_Middle Channel_QPSK_1RB




BW 1.4 M_CSE(10 G-20 G)_Highest Channel_QPSK_1RB



BW 3 M_CSE(10 G-20 G)_Lowest Channel_QPSK_1RB



BW 3 M_CSE(10 G-20 G)_Middle Channel_QPSK_1RB

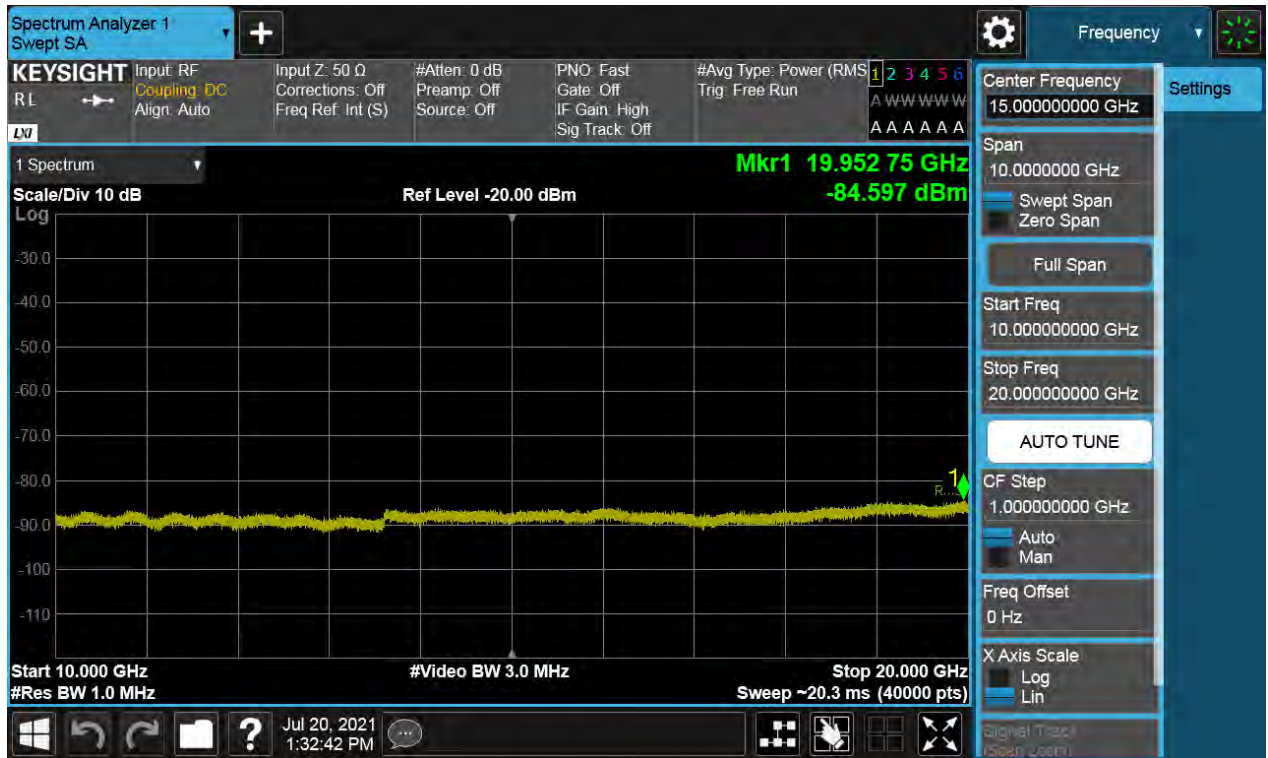

BW 3 M_CSE(10 G-20 G)_Highest Channel_QPSK_1RB

