



FCC PART 15.247

TEST REPORT

For

CHINA ELECTRONICS ZHUHAI CO., LTD.

6/F, CEC BUILDING, NO. 1082 JIUZHOU AVENUE, CENTRAL, JIDA, ZHUHAI,
GUANGDONG, CHINA

FCC ID: 2A4LT-VLCO50020X

Report Type: Original Report	Product Type: Thermal Receipt Printer
Report Number: SZ1210924-49864E-00B	
Report Date: 2021-12-31	
Candy Li <i>Candy Li</i>	
Reviewed By: EMC Engineer	
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	11
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP.....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
FACTOR & MARGIN CALCULATION	18
TEST DATA	18
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26

TEST DATA	26
FCC §15.247(e) - POWER SPECTRAL DENSITY	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	27
APPENDIX BLE.....	28
APPENDIX A: 6DB EMISSION BANDWIDTH.....	28
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	30
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER	32
APPENDIX D: POWER SPECTRAL DENSITY	34
APPENDIX E: BAND EDGE MEASUREMENTS	36
APPENDIX F: DUTY CYCLE	37

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Product	Thermal Receipt Printer
Tested Model.	500203
Multiple Models	500204, 500207, 500208, 500209, 500210, 500211, 500212, 500213, 500214, 500215, 500216, 500217, 500218, 500219, 500220, TPS-80160I, TPS-8020I, TPS-80220I, TPS-80250I
Model difference*	Please refer to the DoS letter
Trademark	VOLCORA, TOPSONIC
Frequency Range	BLE: 2402-2480MHz
Maximum Conducted Peak Output Power	-3.23dBm
Modulation Technique	BLE: GFSK
Antenna Specification*	Internal Antenna: 2.0dBi(provided by the applicant)
Voltage Range	DC 24V from adapter
Date of Test	2021-12-13 ~ 2021-12-29
Sample serial number	SZ1210924-49864E-RF-S1
Received date	2021-09-24
Sample/EUT Status	Good condition
Adapter Information	Model: ABT020240 Input: 100-240V~, 50/60Hz, 1.5A Max Output: DC 24V, 2.0A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Software “FCC_assist_1.0.2.2”* was used during testing and the power level was 10*.

Duty cycle

Please refer to the Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
LENOVO	PC	thinkpadX240	PB-01UAM3 14/05
ZHUHAI ECONOMIC ZONE CET ENTERPRISE CO., LTD.	Cash Drawer	TOPSONIC	Unknown

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable AC Power Cable	1.5	LISN	Adapter
Unshielded Detachable DC output Cable	1.0	Adapter	EUT
Unshielded Detachable USB Cable	1.5	EUT	PC
Unshielded Detachable RJ11 Cable	2.15	EUT	Cash Drawer


Block Diagram of Test Setup

For conducted emission:

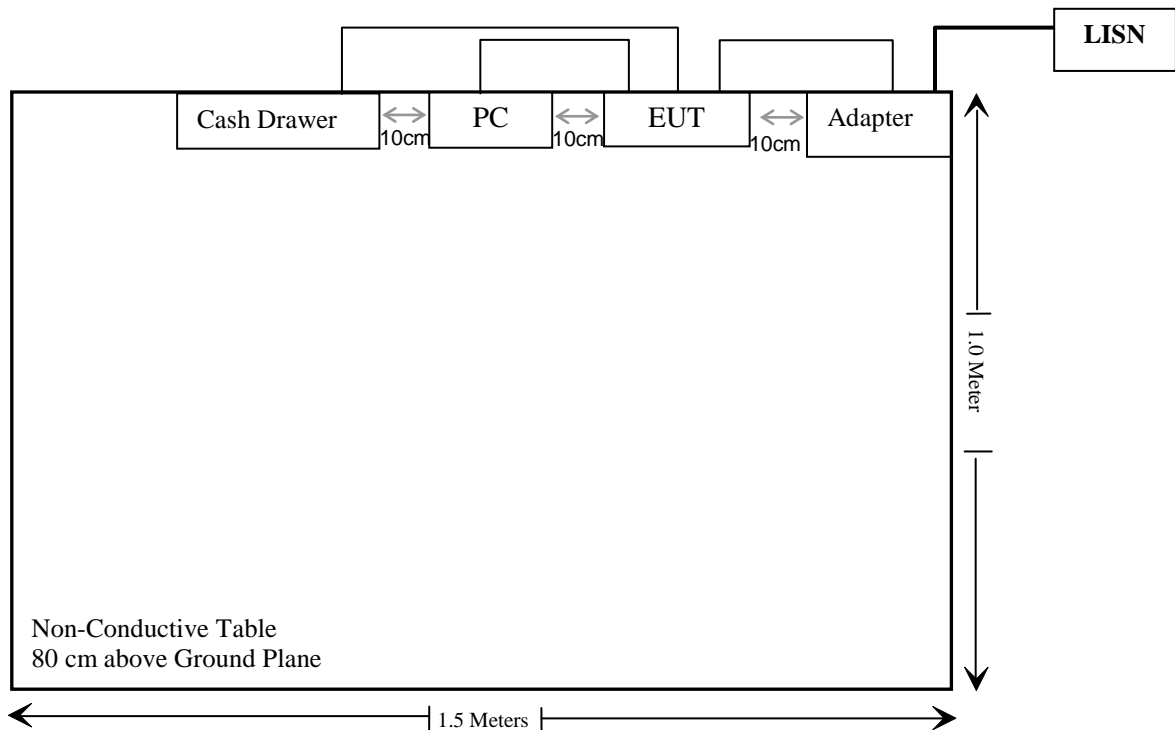


For radiated emission:

Below 1GHz:

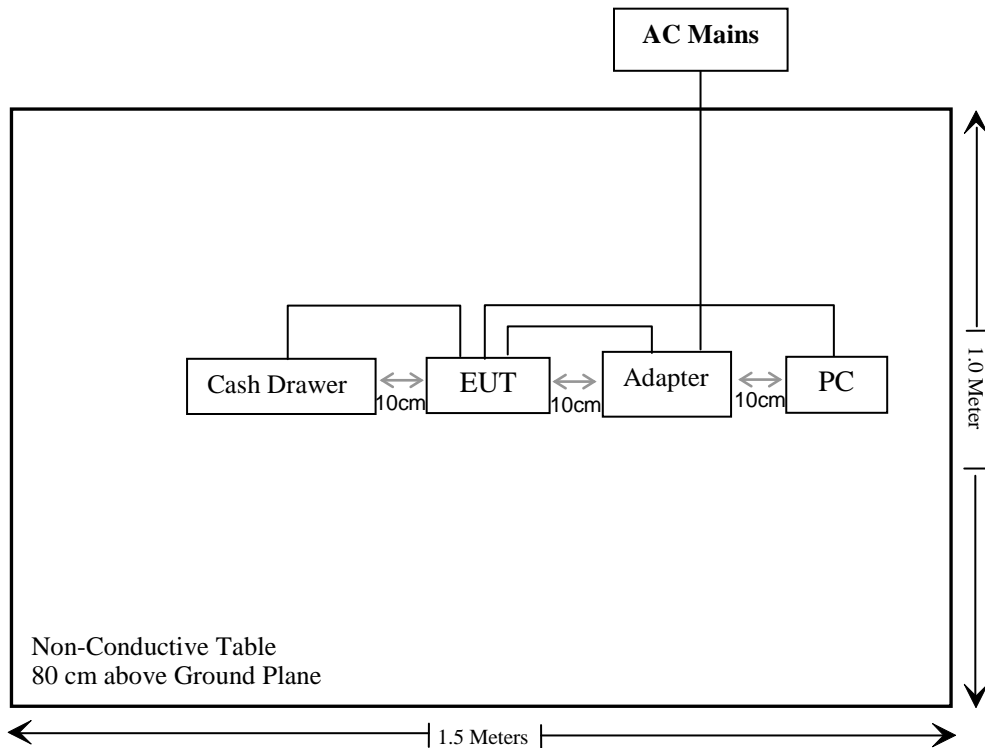

Above 1GHz:

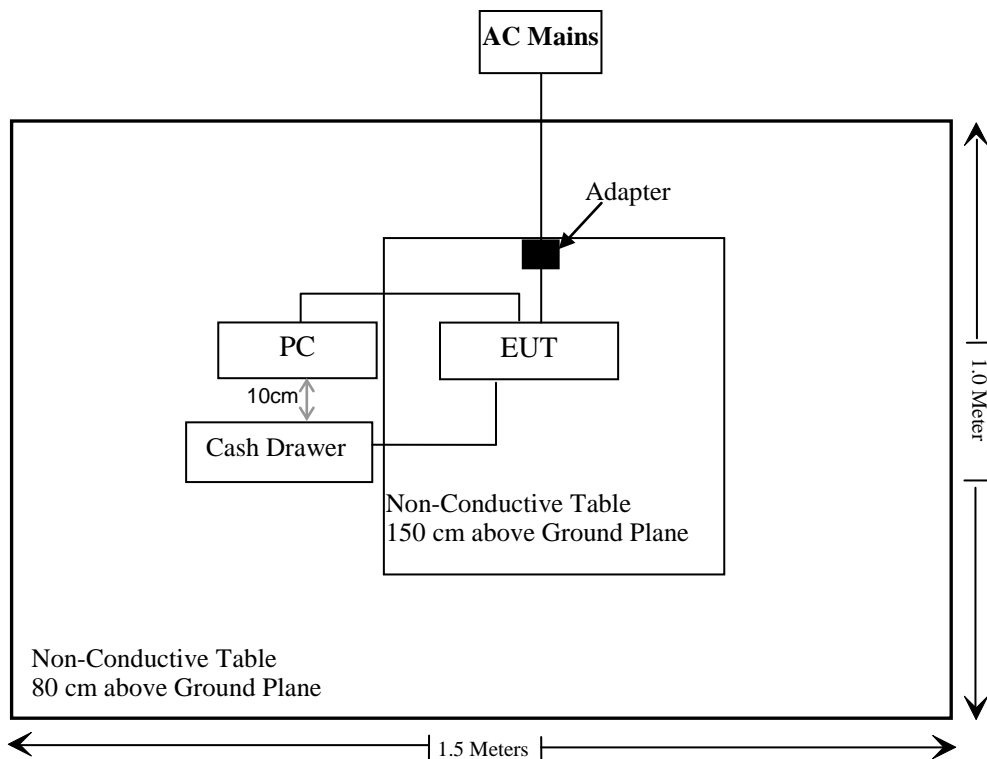

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
RF Coaxial Cable	Unknown	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/04	2023/01/03
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9170	9170-359	2020/01/05	2023/01/04
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
RF Coaxial Cable	Unknown	N-5m	No.3	2020/12/25	2021/12/24
RF Coaxial Cable	Unknown	N-5m	No.4	2020/12/25	2021/12/24
RF Coaxial Cable	Unknown	N-1m	No.5	2020/12/25	2021/12/24
RF Coaxial Cable	Unknown	N-1m	No.6	2020/12/25	2021/12/24
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2021/12/13	2022/12/12
Rohde & Schwarz	Open Switch and Control Unit	OSP120 +OSP -B157	101244 + 100866	2021/12/13	2022/12/12
WEINSCHL	10dB Attenuator	5324	AU 3842	Each time	
Unknown	RF Coaxial Cable	No.32	RF-02	Each time	

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	2.0	1.58	-3	0.5	20	0.0002	1

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal chip antenna arrangement which was permanently attached and the antenna gain is 2.0dBi, fulfill the requirement of this section. Please refer to the product photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

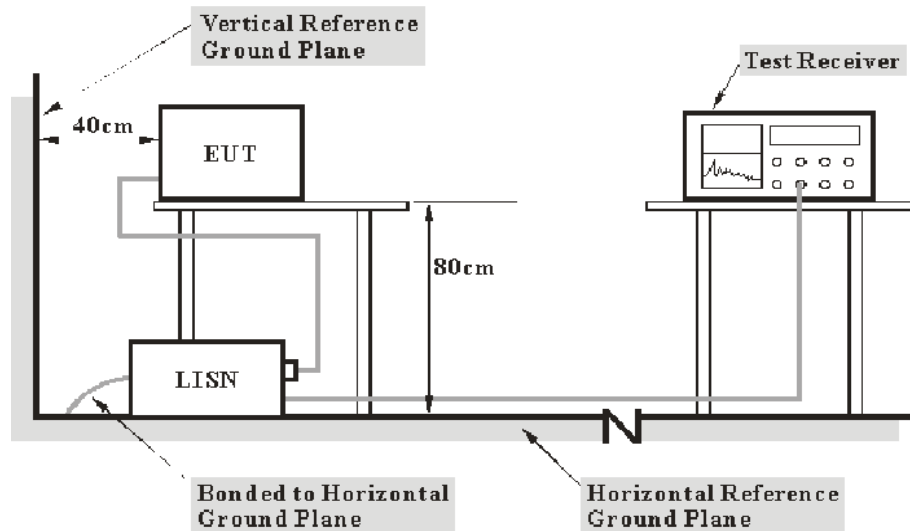

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2021-12-23.

EUT operation mode: Transmitting

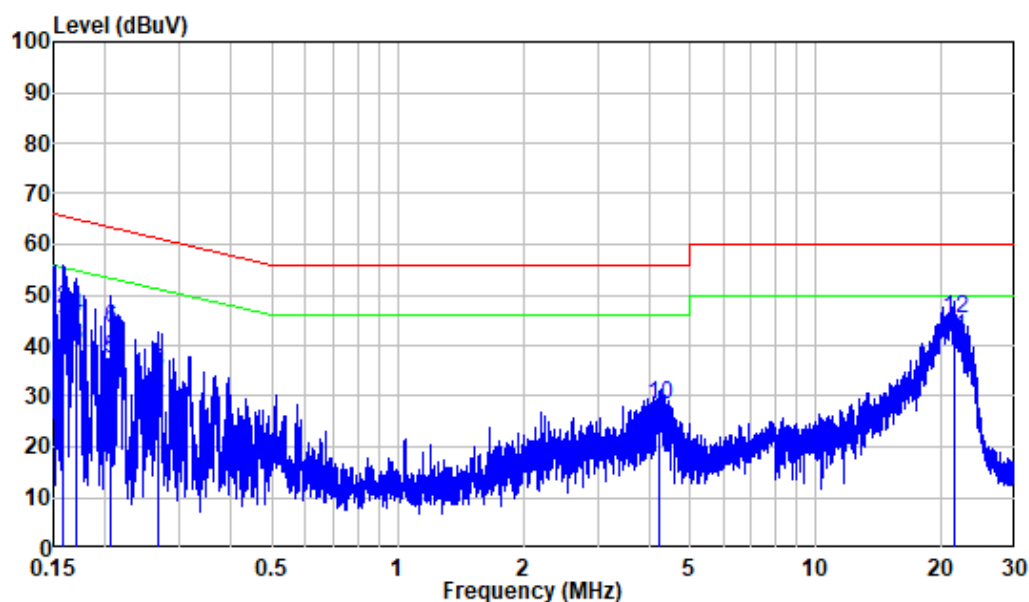AC 120V/60 Hz, Line

Site : Shielding Room


Condition: Line

Test Mode: Transmitting

Model : 500203

Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.88	33.23	43.11	55.55	-12.44	Average
2	0.158	9.88	37.43	47.31	65.55	-18.24	QP
3	0.169	9.86	30.22	40.08	54.99	-14.91	Average
4	0.169	9.86	35.62	45.48	64.99	-19.51	QP
5	0.206	9.80	27.65	37.45	53.35	-15.90	Average
6	0.206	9.80	33.65	43.45	63.35	-19.90	QP
7	0.266	9.80	17.91	27.71	51.23	-23.52	Average
8	0.266	9.80	25.01	34.81	61.23	-26.42	QP
9	4.210	9.95	12.70	22.65	46.00	-23.35	Average
10	4.210	9.95	18.30	28.25	56.00	-27.75	QP
11	21.458	10.24	31.28	41.52	50.00	-8.48	Average
12	21.458	10.24	35.08	45.32	60.00	-14.68	QP


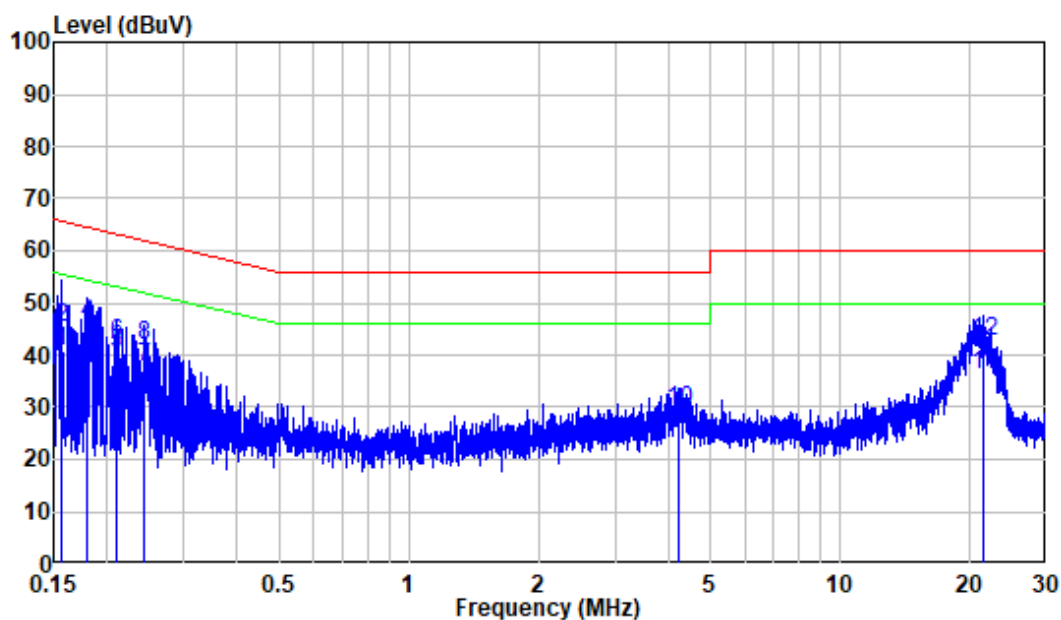
AC 120V/60 Hz, Neutral

Site : Shielding Room
Condition: Neutral
Test Mode: Transmitting
Model : 500203
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.91	30.68	40.59	55.66	-15.07	Average
2	0.156	9.91	35.28	45.19	65.66	-20.47	QP
3	0.180	9.96	28.67	38.63	54.49	-15.86	Average
4	0.180	9.96	36.07	46.03	64.49	-18.46	QP
5	0.211	9.99	30.57	40.56	53.18	-12.62	Average
6	0.211	9.99	32.37	42.36	63.18	-20.82	QP
7	0.243	9.98	27.57	37.55	52.00	-14.45	Average
8	0.243	9.98	31.77	41.75	62.00	-20.25	QP
9	4.207	10.04	16.20	26.24	46.00	-19.76	Average
10	4.207	10.04	19.50	29.54	56.00	-26.46	QP
11	21.472	10.23	26.03	36.26	50.00	-13.74	Average
12	21.472	10.23	32.43	42.66	60.00	-17.34	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

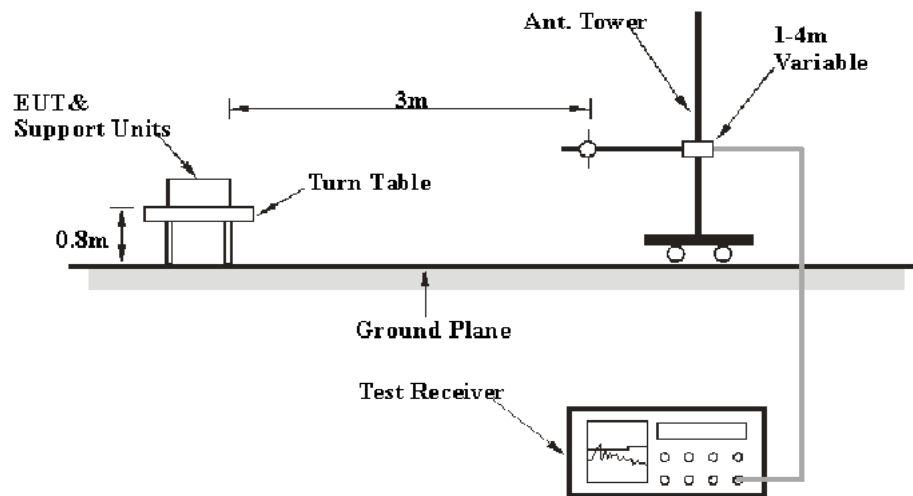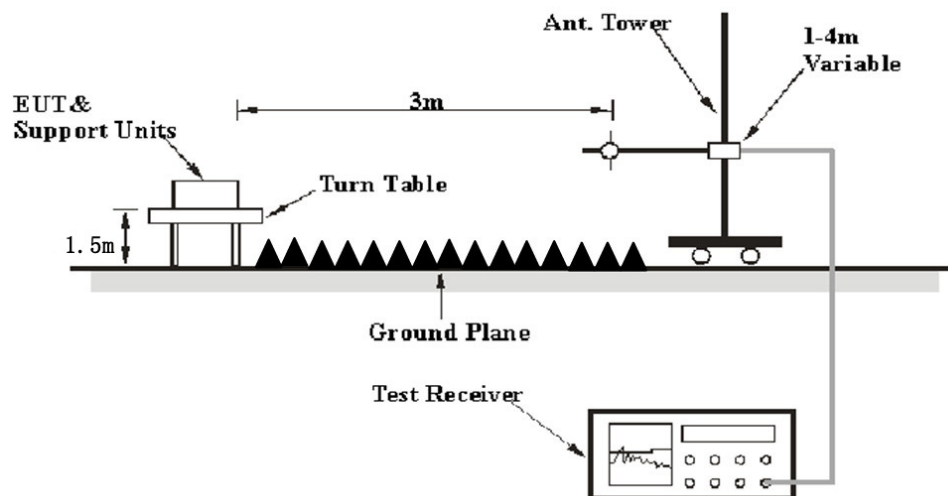EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lü on 2021-12-23

EUT operation mode: Transmitting

30 MHz ~ 1 GHz:

Low channel was the worst case:

Horizontal

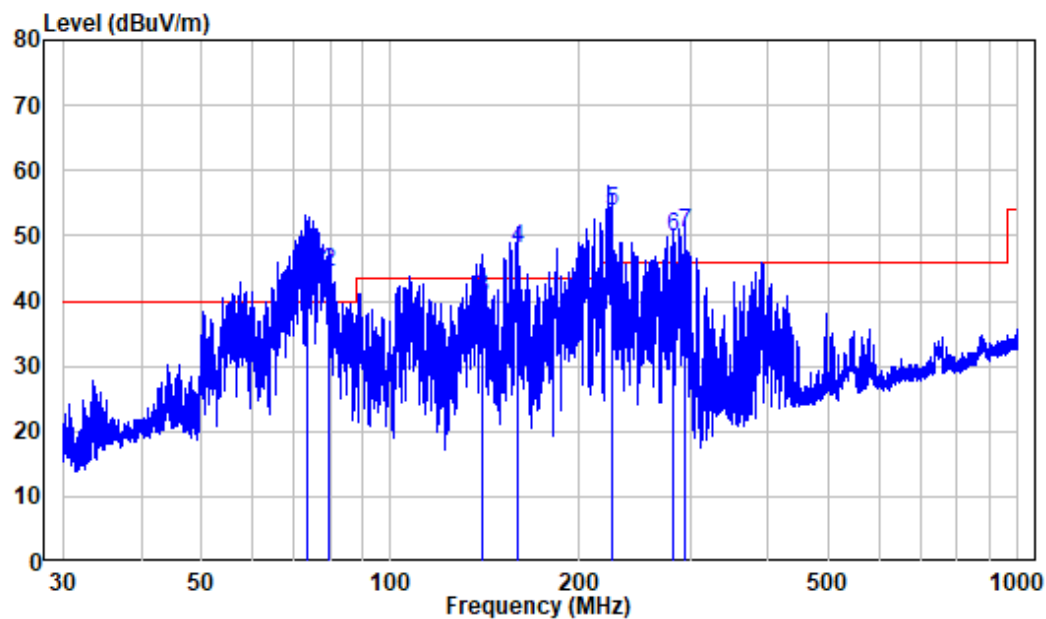

Site : chamber


Condition: 3m HORIZONTAL

Job No. : SZ1210924-49864E-RF

Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	73.650	-15.98	60.31	44.33	40.00	4.33	QP *
2	79.528	-16.74	61.12	44.38	40.00	4.38	QP *
3	139.545	-15.43	55.93	40.50	43.50	-3.00	QP
4	159.530	-14.26	62.34	48.08	43.50	4.58	QP *
5	225.910	-11.23	65.03	53.80	46.00	7.80	QP *
6	282.000	-9.52	59.35	49.83	46.00	3.83	QP *
7	295.163	-9.27	59.64	50.37	46.00	4.37	QP *

Vertical

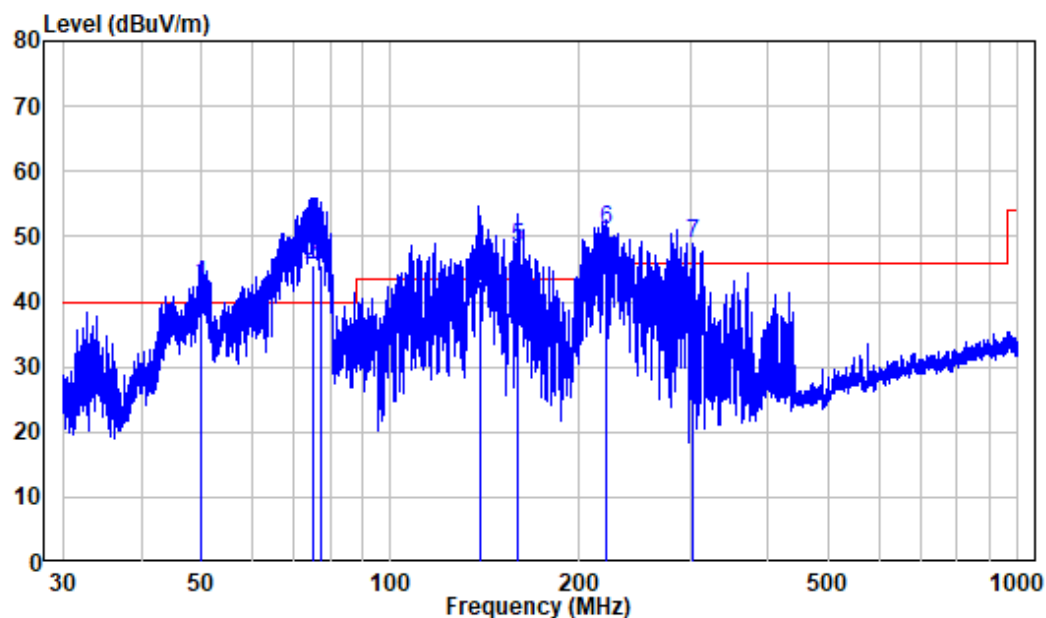

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZ1210924-49864E-RF
 Test Mode: Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.722	-9.92	52.44	42.52	40.00	2.52	QP *
2	74.959	-16.22	61.69	45.47	40.00	5.47	QP *
3	77.583	-16.57	62.09	45.52	40.00	5.52	QP *
4	138.865	-15.39	58.65	43.26	43.50	-0.24	QP
5	159.744	-14.23	62.38	48.15	43.50	4.65	QP *
6	220.008	-11.41	62.52	51.11	46.00	5.11	QP *
7	302.481	-9.14	58.09	48.95	46.00	2.95	QP *

Note *: The data record above represents the worst case for all supported operating modes, there were no spurious emission in the range 30MHz -1GHz over the limit in §15.209 caused by radio, the emission list at above table was investigated and was not caused by the radio, the emission was present when the radio was not transmitting. Those emissions comply with the FCC Part 15, Subpart B-Unintentional radiators §15.109(b) limit set for Class A digital device as the EUT is a Class A equipment according the user manual.

Above 1 GHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
BLE 1M, Low Channel									
2310	48.02	PK	254	1.3	H	-7.23	40.79	74	-33.21
2310	51.58	PK	327	1.8	V	-7.23	44.35	74	-29.65
2390	56.54	PK	301	2.1	H	-7.21	49.33	74	-24.67
2390	53.32	PK	111	1.6	V	-7.21	46.11	74	-27.89
4804	49.71	PK	345	1.4	H	-3.52	46.19	74	-27.81
4804	42.55	PK	84	1.8	V	2.81	45.36	74	-28.64
BLE 1M, Middle Channel									
4880	47.17	PK	293	1.1	H	-3.37	43.8	74	-30.2
4880	45.85	PK	313	1.1	V	-3.37	42.48	74	-31.52
BLE 1M, High Channel									
2483.5	60.18	PK	151	1.5	H	-7.2	52.98	74	-21.02
2483.5	55.79	PK	18	1.1	V	-7.2	48.59	74	-25.41
2500	44.08	PK	154	1.1	H	-7.18	36.9	74	-37.1
2500	44.47	PK	292	2.2	V	-7.18	37.29	74	-36.71
4960	52.20	PK	318	1.3	H	-3.01	49.19	74	-24.81
4960	52.50	PK	327	1.3	V	-3.01	49.49	74	-24.51

Note:



Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level = Factor + Reading

Margin = Absolute Level - Limit

The other spurious emission which is 20dB below to the limit was not recorded.


For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

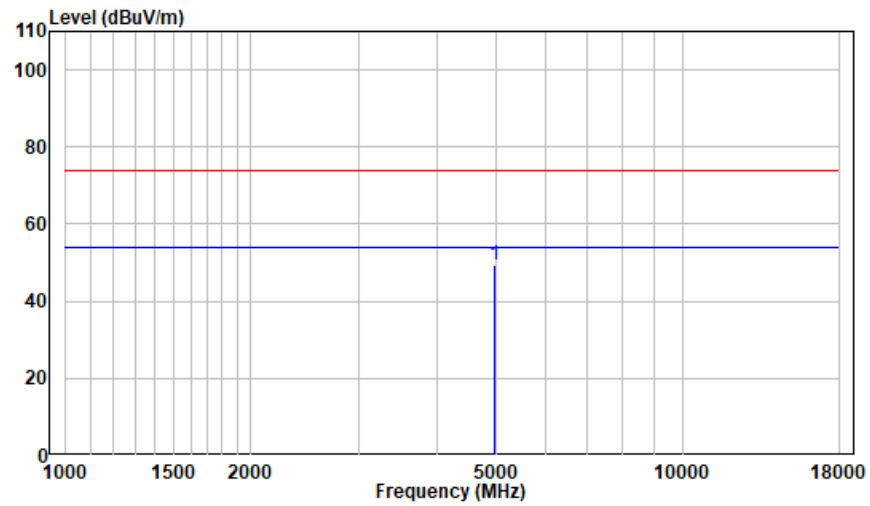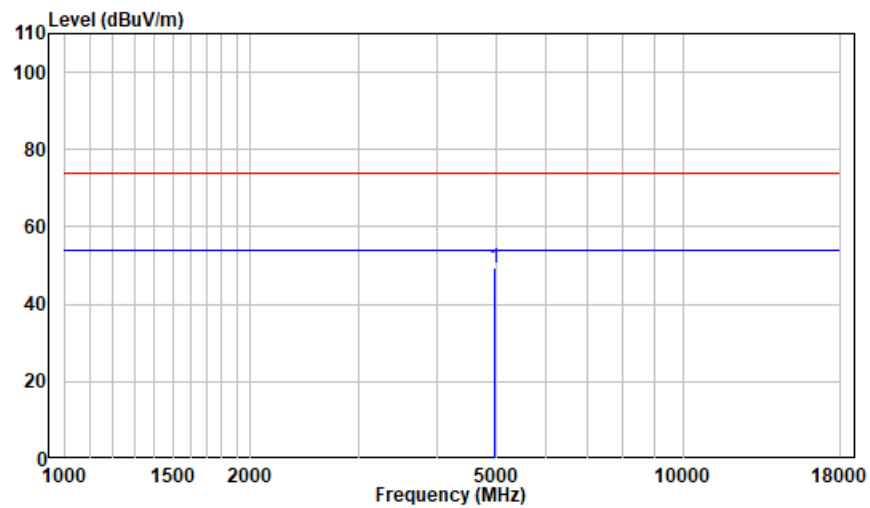1-18 GHz:**Pre-scan plots:****BLE 1M High Channel
Horizontal****Vertical**


18 -25GHz:

Pre-scan plots:

BLE 1M High Channel
Horizontal

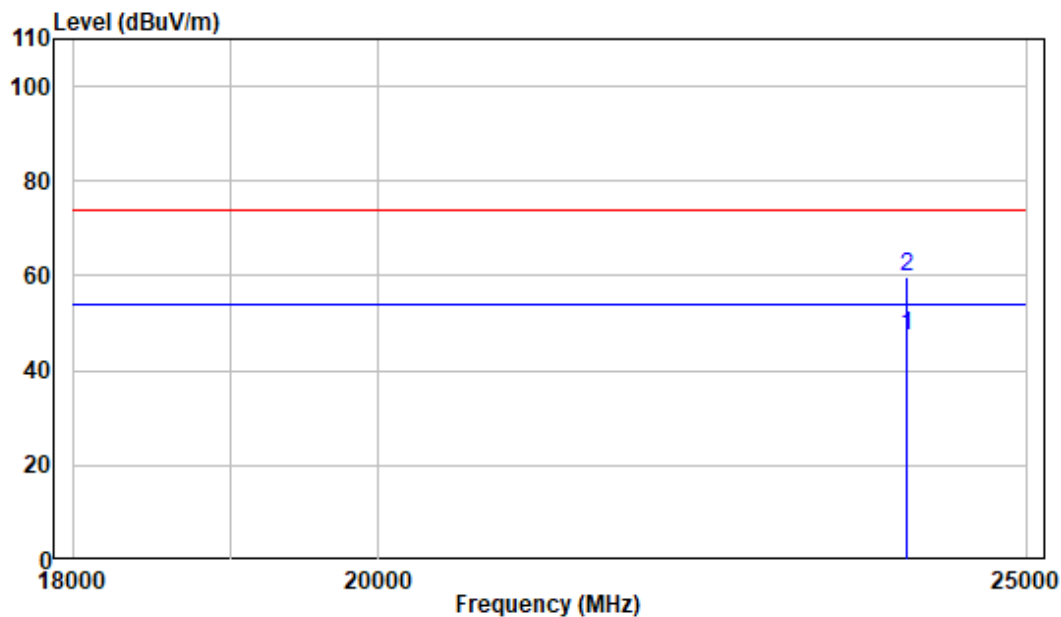

Vertical

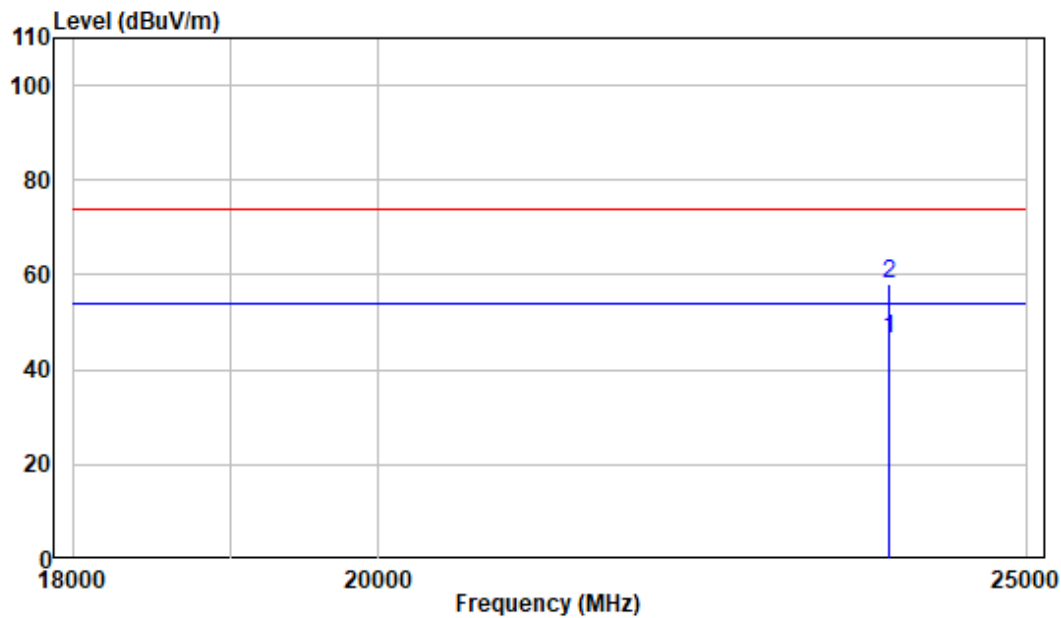


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	25.9 °C
Relative Humidity:	47 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-12-29.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix BLE.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	25.9 °C
Relative Humidity:	47 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-12-29.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix BLE.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	25.9 °C
Relative Humidity:	47 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-12-29.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix BLE.

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**Test Data****Environmental Conditions**

Temperature:	25.9 °C
Relative Humidity:	47 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-12-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix BLE.

APPENDIX BLE


Appendix A: 6dB Emission Bandwidth

Test Result


TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.512	2401.756	2402.268	0.5	PASS
		2440	0.508	2439.760	2440.268	0.5	PASS
		2480	0.516	2479.756	2480.272	0.5	PASS

Test Graphs

6dB Bandwidth, BLE_1M Low Channel

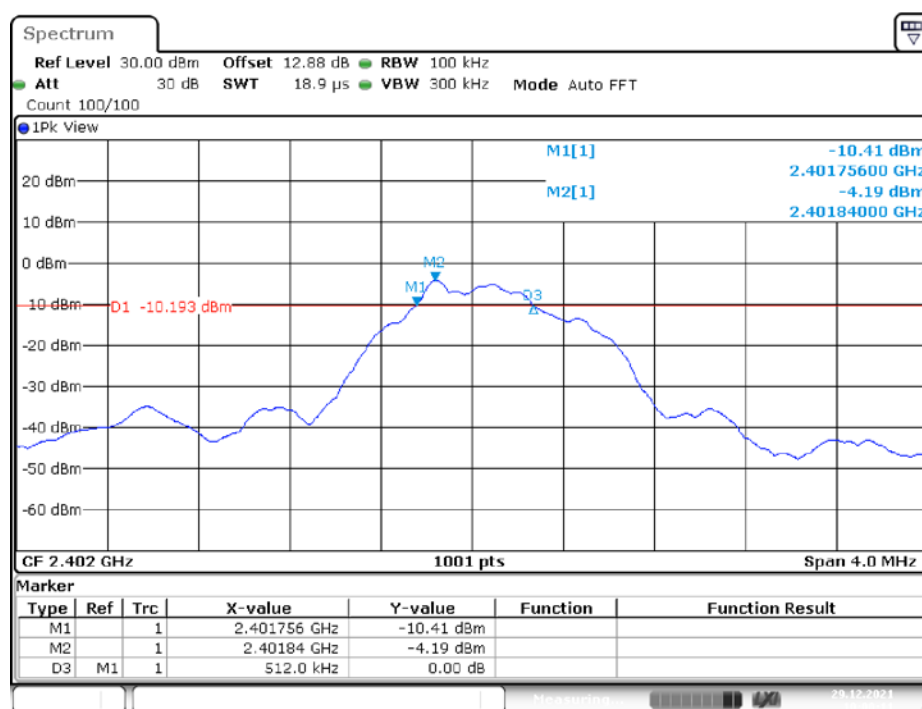


6dB Bandwidth, BLE_1M Middle Channel

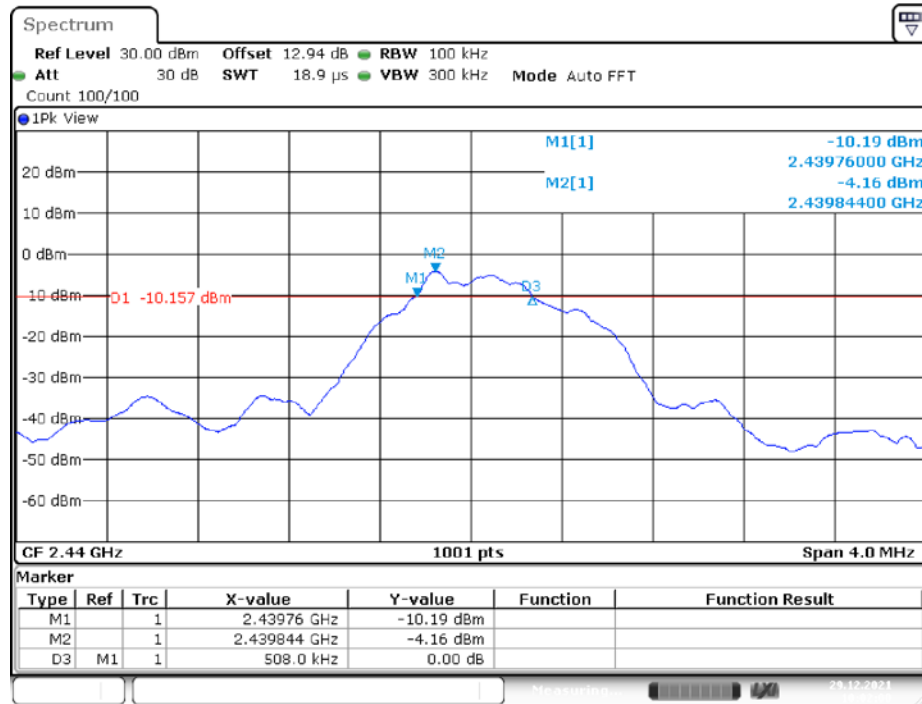

Date: 29.DEC.2021 10:02:00

6dB Bandwidth, BLE_1M High Channel

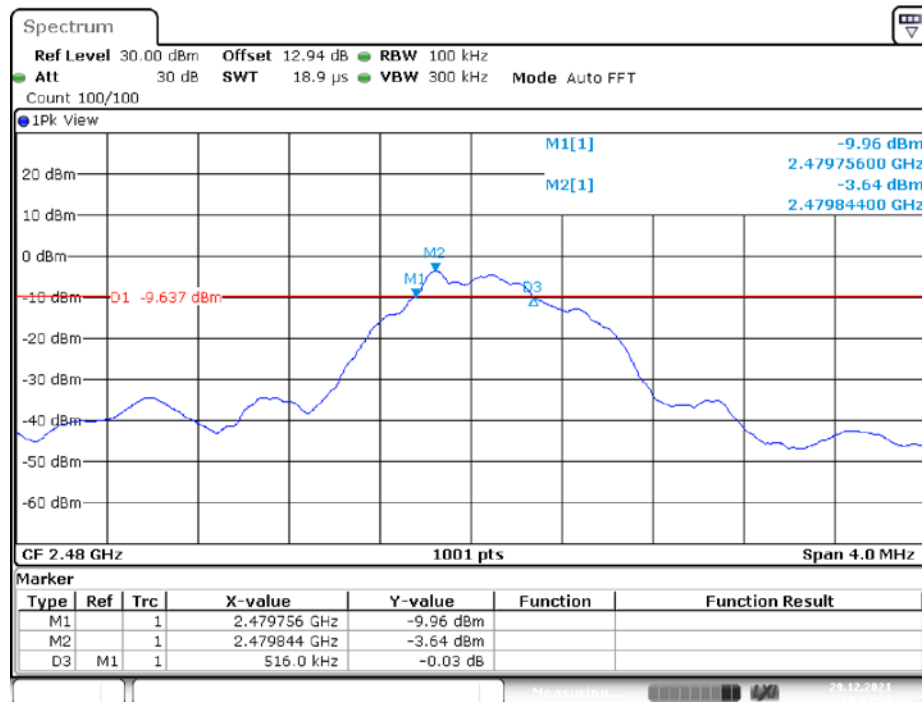

Date: 29.DEC.2021 10:03:34


Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_BLE	Ant1	2402	1.035	2401.580	2402.615	---	PASS
		2440	1.035	2439.584	2440.619	---	PASS
		2480	1.035	2479.584	2480.619	---	PASS

Test Graphs

99% Bandwidth, BLE_1M Low Channel

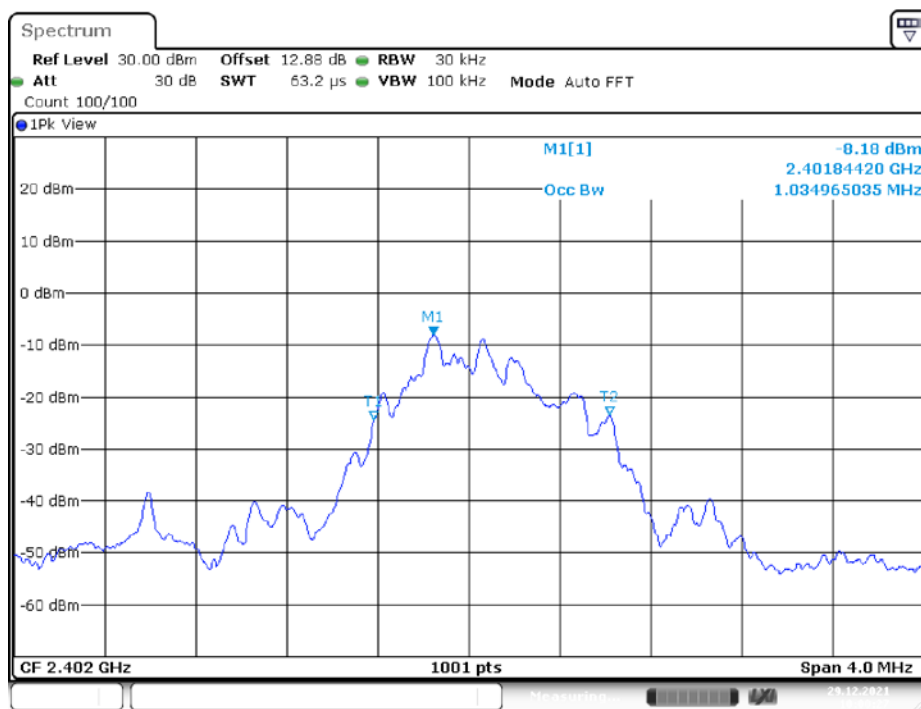

99% Bandwidth, BLE_1M Middle Channel

Date: 29.DEC.2021 10:02:17

99% Bandwidth, BLE_1M High Channel

Date: 29.DEC.2021 10:03:51


Appendix C: Maximum conducted Peak output power

Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_BLE	Ant1	2402	-3.9	<=30	PASS
		2440	-3.96	<=30	PASS
		2480	-3.23	<=30	PASS

Test Graphs


BLE_1M Low Channel

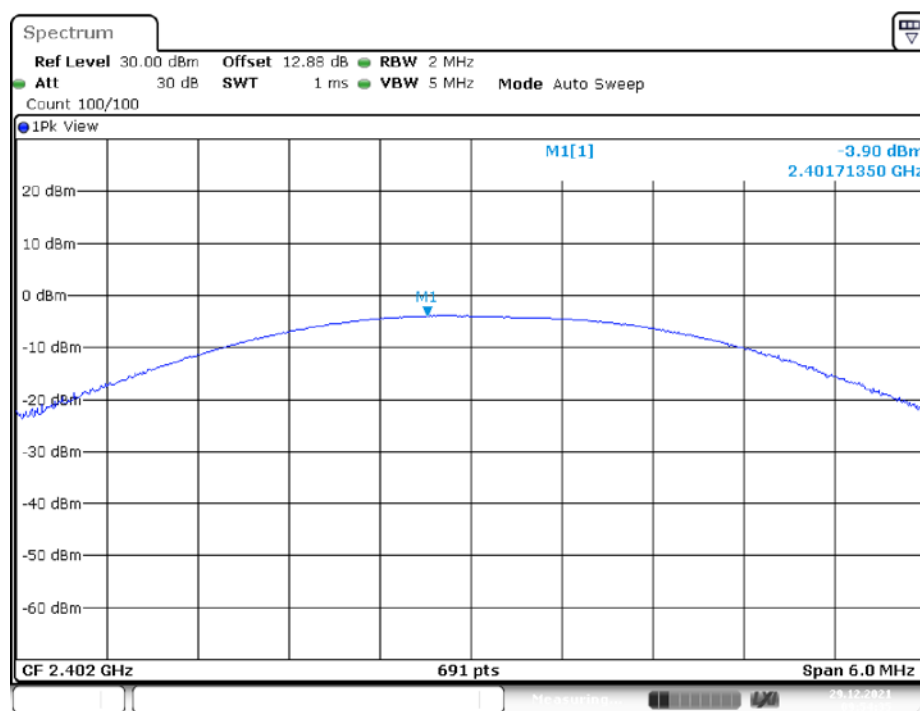

Date: 29.DEC.2021 09:54:36

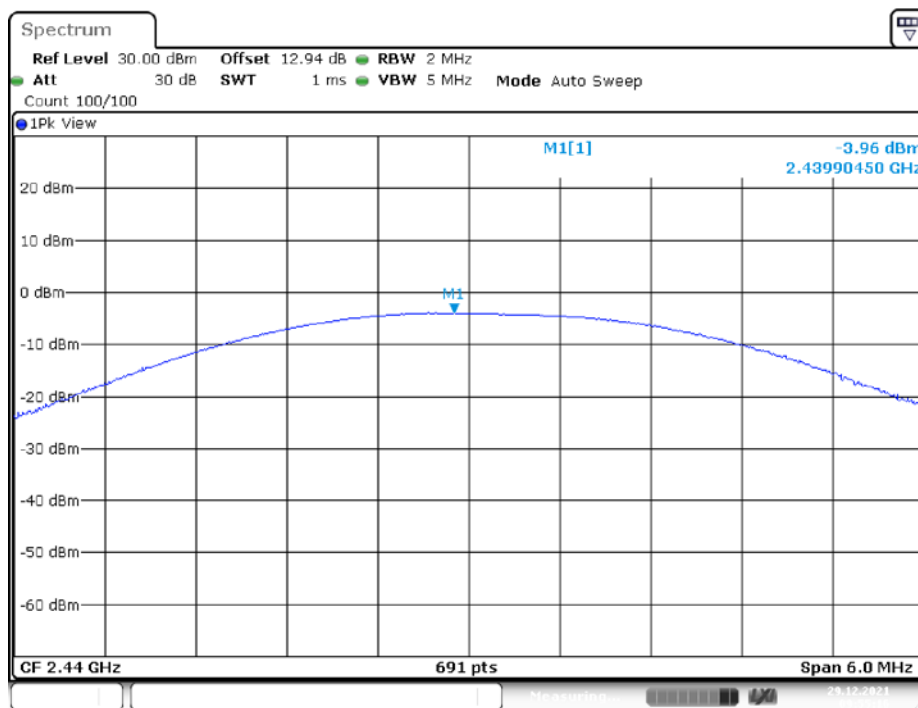BLE_1M Middle Channel

Date: 29.DEC.2021 09:55:17

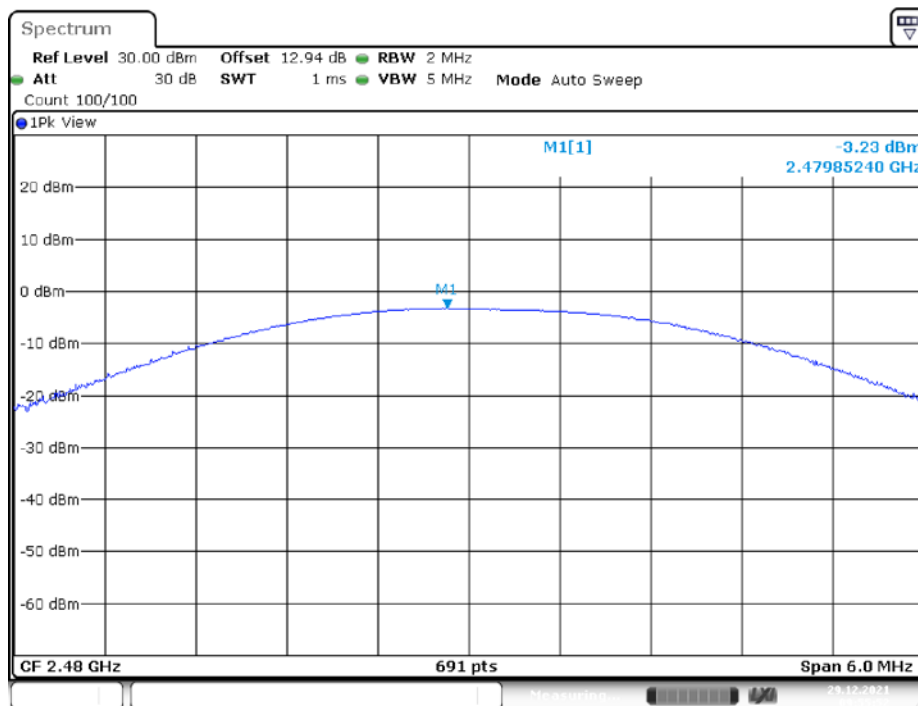BLE_1M High Channel

Date: 29.DEC.2021 09:55:52


Appendix D: Power spectral density



Test Result

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_BLE	Ant1	2402	-24.39	<=8	PASS
		2440	-24.38	<=8	PASS
		2480	-23.85	<=8	PASS

Test Graphs

Power Spectral Density, BLE_1M Low Channel

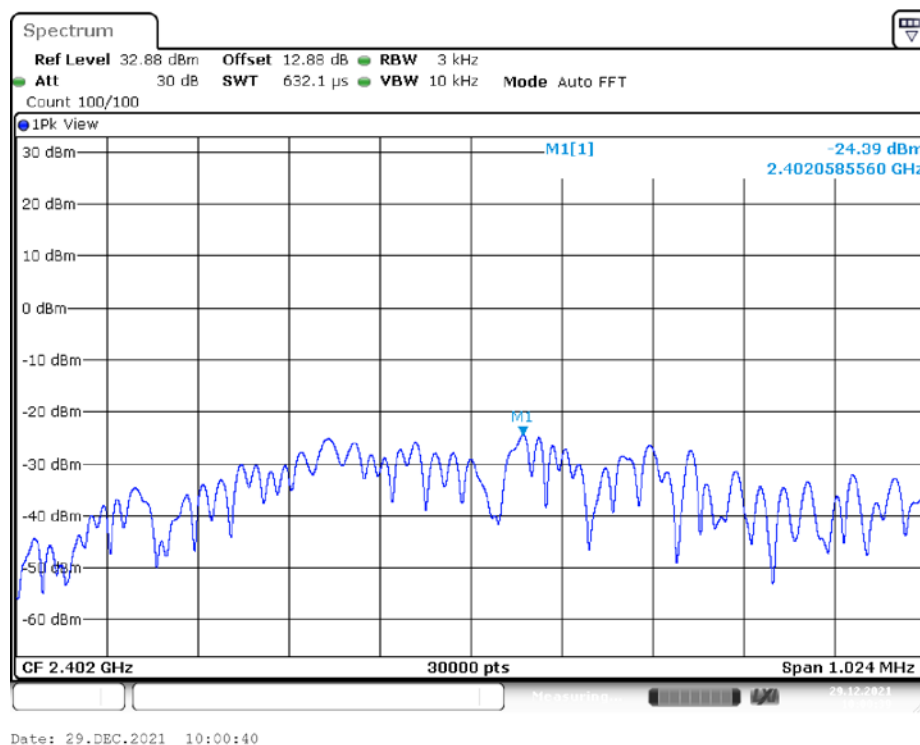


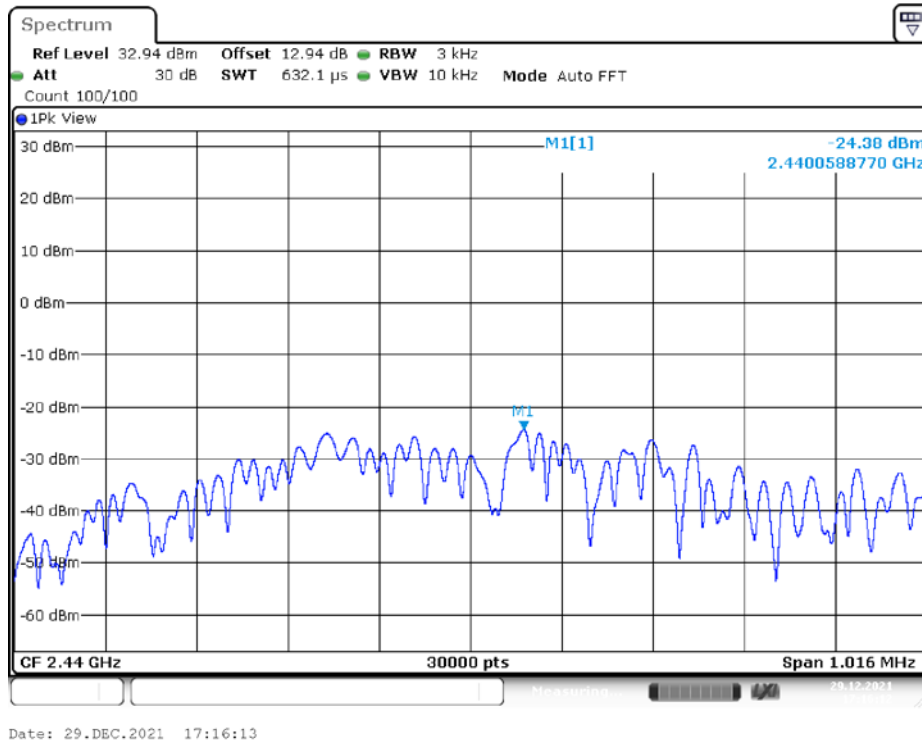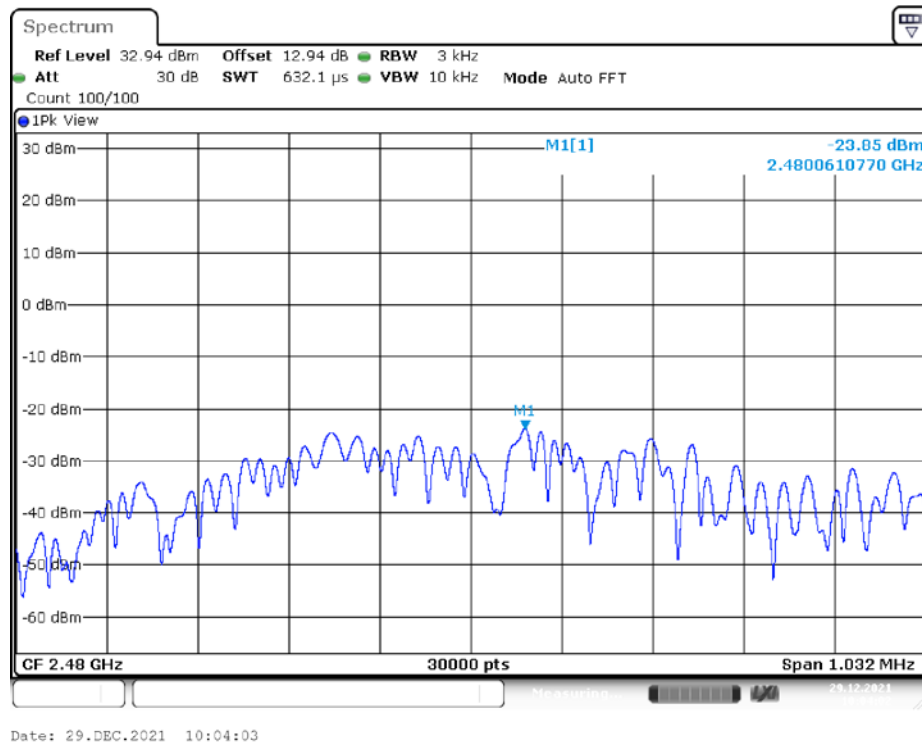Power Spectral Density, BLE_1M Middle Channel**Power Spectral Density, BLE_1M High Channel**

Appendix E: Band edge measurements


Test Graphs

BLE_1M_Ant1_Low_2402MHz

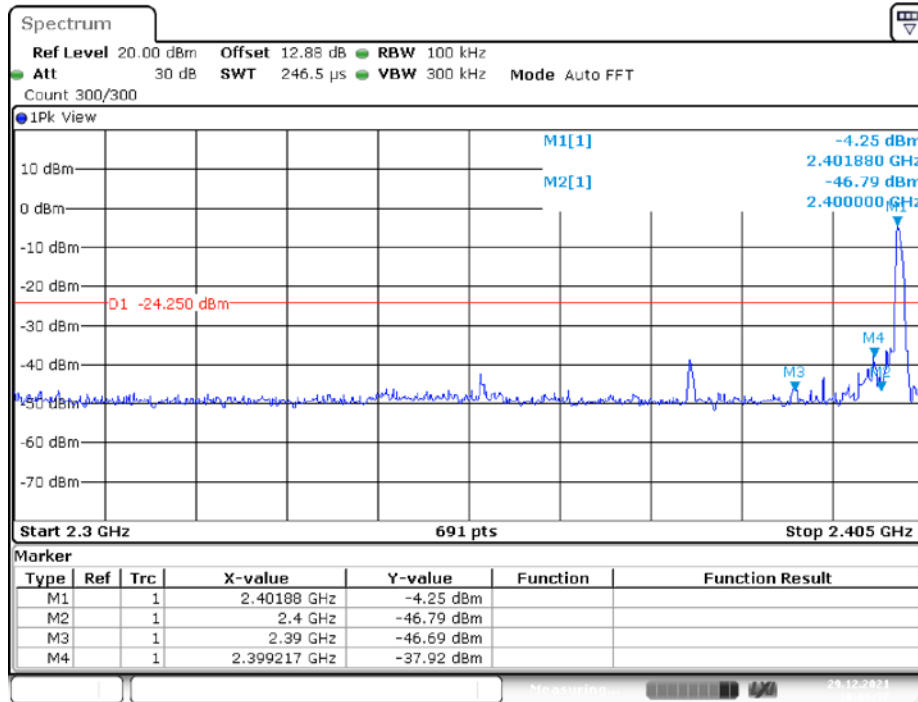

Date: 29.DEC.2021 10:00:58

BLE_1M_Ant1_High_2480MHz

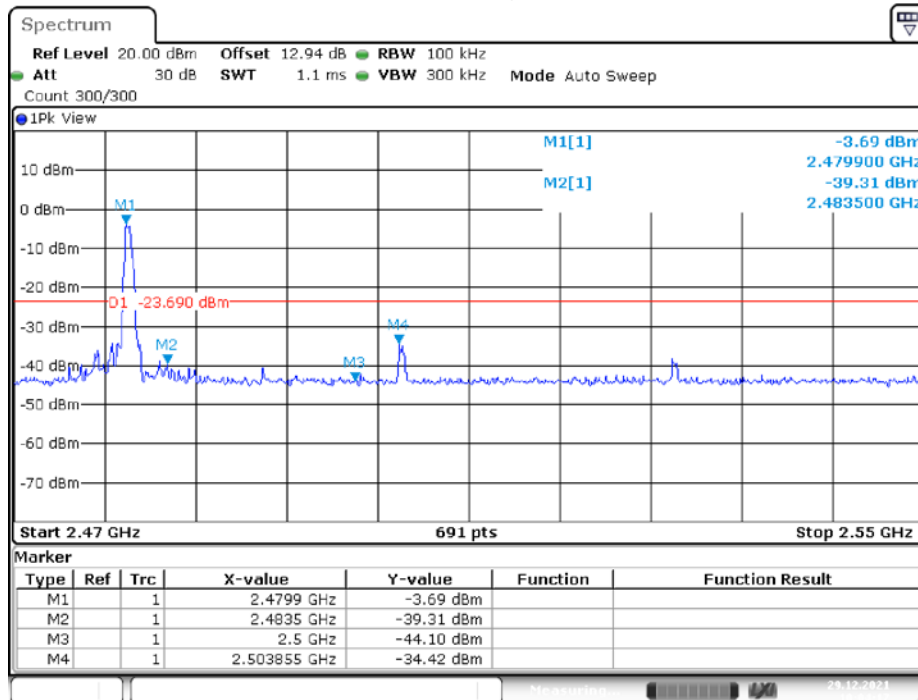

Date: 29.DEC.2021 10:04:18


Appendix F: Duty Cycle

Test Result


TestMode	Antenna	Channel	TransmissionDuration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_BLE	Ant1	2402	0.094	0.623	15.09
		2440	0.094	0.630	14.92
		2480	0.094	0.623	15.09

Test Graphs

Duty Cycle, BLE_1M, Low Channel

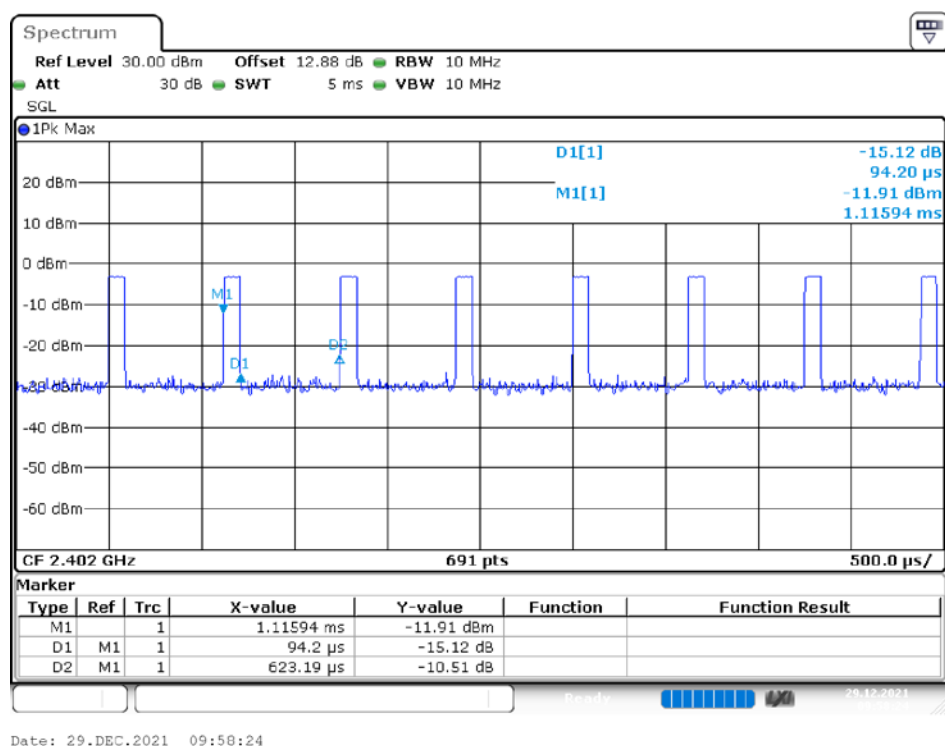


Duty Cycle, BLE_1M, Middle Channel

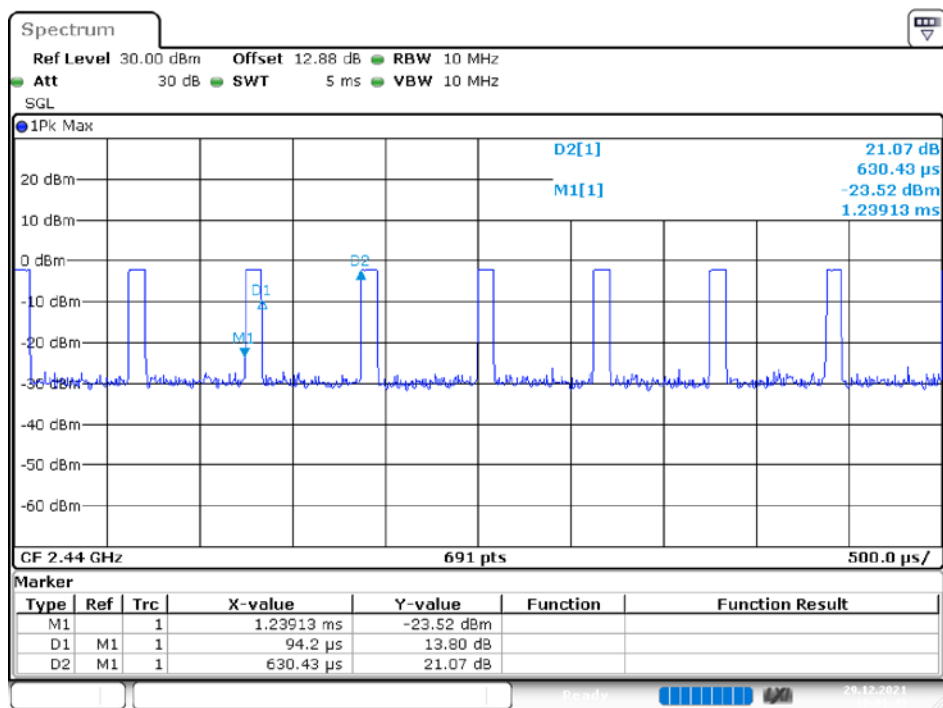

Date: 29.DEC.2021 10:01:44

Duty Cycle, BLE_1M, High Channel

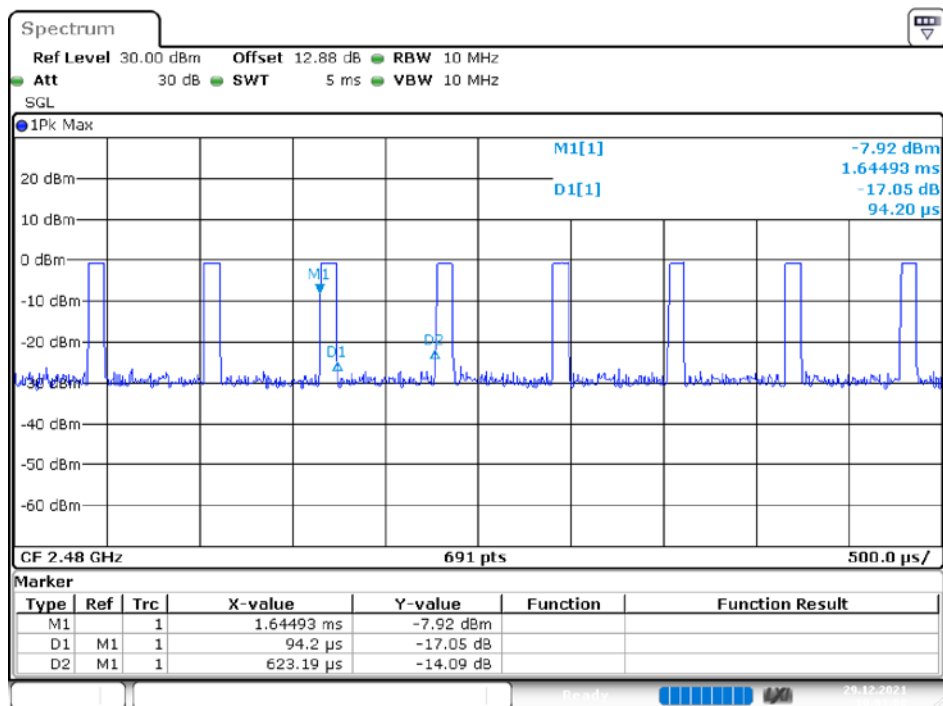

Date: 29.DEC.2021 10:03:06

***** END OF REPORT *****