

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
January 10, 2023

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2301-FC019

FCC ID: A3LSMM546B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-M546B/DS
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.296	24.71
		1M10W7D	16QAM	0.252	24.02
		1M10W7D	64QAM	0.200	23.02
		1M09W7D	256QAM	0.103	20.13
LTE – Band66/4 (3)	1711.5 – 1778.5	2M72G7D	QPSK	0.319	25.04
		2M72W7D	16QAM	0.275	24.40
		2M72W7D	64QAM	0.222	23.47
		2M71W7D	256QAM	0.112	20.51
LTE – Band66/4 (5)	1712.5 – 1777.5	4M52G7D	QPSK	0.327	25.14
		4M53W7D	16QAM	0.282	24.51
		4M52W7D	64QAM	0.225	23.52
		4M52W7D	256QAM	0.114	20.57
LTE – Band66/4 (10)	1715.0 – 1775.0	9M04G7D	QPSK	0.334	25.24
		9M01W7D	16QAM	0.281	24.48
		9M03W7D	64QAM	0.221	23.45
		9M00W7D	256QAM	0.113	20.53
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.333	25.22
		13M5W7D	16QAM	0.272	24.35
		13M5W7D	64QAM	0.218	23.38
		13M5W7D	256QAM	0.111	20.46
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.335	25.25
		18M0W7D	16QAM	0.268	24.28
		18M0W7D	64QAM	0.219	23.41
		18M0W7D	256QAM	0.110	20.43

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2301-FC019

REVIEWED BY

유권우



Report prepared by : Jin Woo Yu
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2301-FC019	January 10, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS	30
8.6 BAND EDGE	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
9. TEST PLOTS.....	50
10. ANNEX A_ TEST SETUP PHOTO.....	171

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMM546B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile phone
Model(s):	SM-M546B/DS
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	November 29, 2022 ~ January 05, 2023
Serial number:	Radiated: R3CTA0CE0SK Conducted: R3CTA0CDNEA

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80 MHz), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

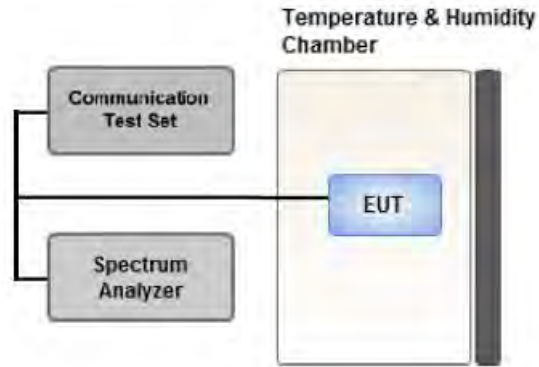

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

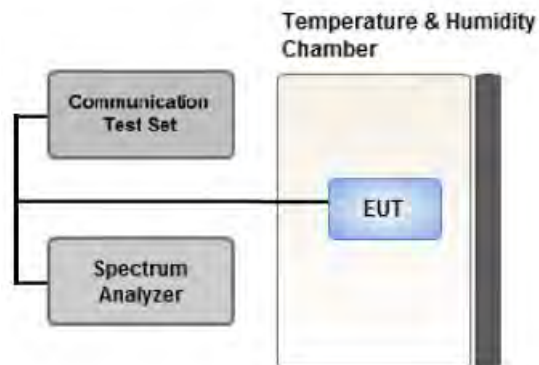

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

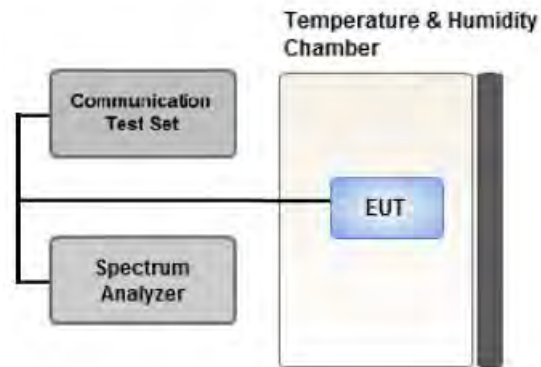

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

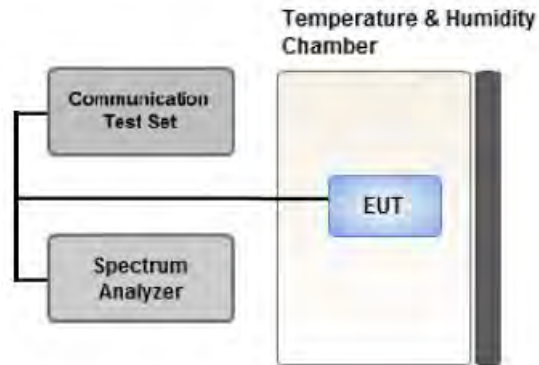

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz} / \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

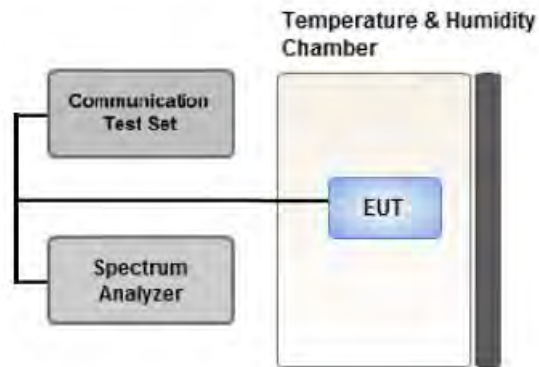

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at

least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 20 MHz)
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis			
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1.4	Low, Mid	1	5	Z			
			High	1	0				
		3	Low, Mid	1	14				
			High	1	0				
		5	Low, Mid	1	24				
			High	1	0				
		10	Low, Mid	1	49				
			High	1	0				
		15	Low, Mid	1	74				
			High	1	0				
		20	Low, Mid	1	99				
			High	1	50				
		Radiated Spurious and Harmonic Emissions	QPSK	20	Low, Mid		1	99	X
					High		1	50	

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/02/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/05/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2023	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
132322	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1710.7	LTE B66/B4 1.4 MHz	QPSK	-19.71	13.40	10.04	2.06	V	< 1.00	0.137	21.38
		16-QAM	-20.25	12.86	10.04	2.06	V		0.121	20.84
		64-QAM	-20.94	12.17	10.04	2.06	V		0.104	20.15
		256-QAM	-23.13	9.98	10.04	2.06	V		0.063	17.96
1745.0		QPSK	-16.56	16.61	10.18	2.08	V		0.296	24.71
		16-QAM	-17.48	15.69	10.18	2.08	V		0.239	23.79
		64-QAM	-18.45	14.72	10.18	2.08	V		0.191	22.82
		256-QAM	-21.38	11.79	10.18	2.08	V		0.097	19.89
1779.3		QPSK	-16.75	16.41	10.26	2.12	V		0.285	24.55
		16-QAM	-17.28	15.88	10.26	2.12	V		0.252	24.02
		64-QAM	-18.28	14.88	10.26	2.12	V		0.200	23.02
		256-QAM	-21.17	11.99	10.26	2.12	V		0.103	20.13

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1711.5	LTE B66/B4 3 MHz	QPSK	-19.05	14.06	10.04	2.06	V	< 1.00	0.160	22.04
		16-QAM	-19.59	13.52	10.04	2.06	V		0.141	21.50
		64-QAM	-20.28	12.83	10.04	2.06	V		0.120	20.81
		256-QAM	-22.47	10.64	10.04	2.06	V		0.073	18.62
1745.0		QPSK	-16.23	16.94	10.18	2.08	V		0.319	25.04
		16-QAM	-17.14	16.03	10.18	2.08	V		0.259	24.13
		64-QAM	-18.12	15.05	10.18	2.08	V		0.207	23.15
		256-QAM	-21.12	12.05	10.18	2.08	V		0.104	20.15
1778.5		QPSK	-16.28	16.88	10.26	2.12	V		0.318	25.02
		16-QAM	-16.90	16.26	10.26	2.12	V		0.275	24.40
		64-QAM	-17.83	15.33	10.26	2.12	V		0.222	23.47
		256-QAM	-20.79	12.37	10.26	2.12	V		0.112	20.51

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1712.5	LTE B66/B4 5 MHz	QPSK	-18.79	14.32	10.04	2.06	V	< 1.00	0.170	22.30
		16-QAM	-19.35	13.76	10.04	2.06	V		0.149	21.74
		64-QAM	-20.08	13.03	10.04	2.06	V		0.126	21.01
		256-QAM	-22.19	10.92	10.04	2.06	V		0.078	18.90
1745.0		QPSK	-16.13	17.04	10.18	2.08	V		0.327	25.14
		16-QAM	-17.14	16.03	10.18	2.08	V		0.259	24.13
		64-QAM	-18.09	15.08	10.18	2.08	V		0.208	23.18
		256-QAM	-21.01	12.16	10.18	2.08	V		0.106	20.26
1777.5		QPSK	-16.30	16.86	10.26	2.12	V		0.316	25.00
		16-QAM	-16.79	16.37	10.26	2.12	V		0.282	24.51
		64-QAM	-17.78	15.38	10.26	2.12	V		0.225	23.52
		256-QAM	-20.73	12.43	10.26	2.12	V		0.114	20.57

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1715.0	LTE B66/B4 10 MHz	QPSK	-17.94	15.17	10.06	2.06	V	< 1.00	0.207	23.17
		16-QAM	-18.51	14.60	10.06	2.06	V		0.182	22.60
		64-QAM	-19.18	13.93	10.06	2.06	V		0.156	21.93
		256-QAM	-21.95	11.16	10.06	2.06	V		0.082	19.16
1745.0		QPSK	-16.10	17.07	10.18	2.08	V		0.329	25.17
		16-QAM	-16.98	16.19	10.18	2.08	V		0.269	24.29
		64-QAM	-18.02	15.15	10.18	2.08	V		0.211	23.25
		256-QAM	-20.90	12.27	10.18	2.08	V		0.109	20.37
1775.0		QPSK	-16.04	17.11	10.25	2.12	V		0.334	25.24
		16-QAM	-16.80	16.35	10.25	2.12	V		0.281	24.48
		64-QAM	-17.83	15.32	10.25	2.12	V		0.221	23.45
		256-QAM	-20.75	12.40	10.25	2.12	V		0.113	20.53

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1717.5	LTE B66/B4 15 MHz	QPSK	-17.98	15.14	10.08	2.06	V	< 1.00	0.207	23.16
		16-QAM	-18.54	14.58	10.08	2.06	V		0.182	22.60
		64-QAM	-19.20	13.92	10.08	2.06	V		0.156	21.94
		256-QAM	-21.81	11.31	10.08	2.06	V		0.086	19.33
1745.0		QPSK	-16.05	17.12	10.18	2.08	V		0.333	25.22
		16-QAM	-17.00	16.17	10.18	2.08	V		0.267	24.27
		64-QAM	-17.95	15.22	10.18	2.08	V		0.215	23.32
		256-QAM	-20.88	12.29	10.18	2.08	V		0.109	20.39
1772.5		QPSK	-16.04	17.11	10.24	2.13	V		0.333	25.22
		16-QAM	-16.91	16.24	10.24	2.13	V		0.272	24.35
		64-QAM	-17.88	15.27	10.24	2.13	V		0.218	23.38
		256-QAM	-20.80	12.35	10.24	2.13	V		0.111	20.46

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
1720.0	LTE B66/B4 20 MHz	QPSK	-17.88	15.24	10.08	2.06	V	< 1.00	0.212	23.26
		16-QAM	-18.47	14.65	10.08	2.06	V		0.185	22.67
		64-QAM	-19.21	13.91	10.08	2.06	V		0.156	21.93
		256-QAM	-21.75	11.37	10.08	2.06	V		0.087	19.39
1745.0		QPSK	-16.33	16.84	10.18	2.08	V		0.312	24.94
		16-QAM	-16.99	16.18	10.18	2.08	V		0.268	24.28
		64-QAM	-17.86	15.31	10.18	2.08	V		0.219	23.41
		256-QAM	-20.84	12.33	10.18	2.08	V		0.110	20.43
1770.0		QPSK	-16.01	17.14	10.24	2.13	V		0.335	25.25
		16-QAM	-17.05	16.10	10.24	2.13	V		0.264	24.21
		64-QAM	-18.16	14.99	10.24	2.13	V		0.204	23.10
		256-QAM	-20.97	12.18	10.24	2.13	V		0.107	20.29

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1770.0 MHz
- ▣ MEASURED OUTPUT POWER: 25.25 dBm = 0.335 W
- ▣ MODE: LTE B66/B4
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 38.25 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
132072 (1720.0)	3 440.00	-55.00	12.52	-61.13	3.03	H	-51.64	76.88
	5 160.00	-56.01	12.34	-54.10	3.71	V	-45.47	70.72
	6 880.00	-51.64	11.94	-44.70	4.37	H	-37.13	62.38
132322 (1745.0)	3 490.00	-53.79	12.42	-59.66	2.99	V	-50.23	75.48
	5 235.00	-56.47	12.71	-55.70	3.82	H	-46.80	72.05
	6 980.00	-52.39	11.52	-44.66	4.41	V	-37.55	62.80
132572 (1770.0)	3 540.00	-53.12	12.40	-58.95	3.08	V	-49.63	74.88
	5 310.00	-56.11	13.00	-55.26	3.81	V	-46.07	71.32
	7 080.00	-50.69	10.98	-42.01	4.46	V	-35.49	60.74

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	4.90
			16-QAM			5.32
			64-QAM			5.68
			256-QAM			6.34
	3 MHz		QPSK	15		5.04
			16-QAM			5.55
			64-QAM			5.80
			256-QAM			6.34
	5 MHz		QPSK	25		4.93
			16-QAM			5.52
			64-QAM			5.74
			256-QAM			6.28
	10 MHz		QPSK	50		5.00
			16-QAM			5.48
			64-QAM			5.75
			256-QAM			6.27
	15 MHz		QPSK	75		4.93
			16-QAM			5.44
			64-QAM			5.72
			256-QAM			6.30
20 MHz	QPSK	100	4.89			
	16-QAM		5.43			
	64-QAM		5.70			
	256-QAM		6.31			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 111 ~ 134.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0987
			16-QAM			1.1026
			64-QAM			1.0954
			256-QAM			1.0920
	3 MHz		QPSK	15		2.7211
			16-QAM			2.7190
			64-QAM			2.7160
			256-QAM			2.7119
	5 MHz		QPSK	25		4.5231
			16-QAM			4.5296
			64-QAM			4.5214
			256-QAM			4.5237
	10 MHz		QPSK	50		9.0370
			16-QAM			9.0095
			64-QAM			9.0273
			256-QAM			9.0006
	15 MHz		QPSK	75		13.518
			16-QAM			13.512
			64-QAM			13.484
			256-QAM			13.455
20 MHz	QPSK	100	17.960			
	16-QAM		17.973			
	64-QAM		17.956			
	256-QAM		17.993			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 87 ~ 110.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.4213	27.976	-73.579	-45.603	-13.00
		1745.0	3.4896	27.976	-73.493	-45.517	
		1779.3	3.5604	27.976	-74.876	-46.900	
	3	1711.5	3.4213	27.976	-74.841	-46.865	
		1745.0	3.4881	27.976	-72.581	-44.605	
		1778.5	3.5599	27.976	-74.455	-46.479	
	5	1712.5	3.4213	27.976	-73.977	-46.001	
		1745.0	3.4861	27.976	-73.490	-45.514	
		1777.5	3.5599	27.976	-74.337	-46.361	
	10	1715.0	3.4218	27.976	-74.511	-46.535	
		1745.0	3.4816	27.976	-73.128	-45.152	
		1775.0	3.5594	27.976	-74.847	-46.871	
	15	1717.5	3.4223	27.976	-75.504	-47.528	
		1745.0	3.4771	27.976	-73.988	-46.012	
		1772.5	3.5589	27.976	-75.246	-47.270	
	20	1720.0	3.4228	27.976	-74.910	-46.934	
		1745.0	3.4726	27.976	-74.057	-46.081	
		1770.0	3.5584	27.976	-75.269	-47.293	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 135 ~ 170.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 51~86.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1710 700 002	0.0	0.000 000	0.000
100 %		-30	1710 699 999	-3.1	0.000 000	-0.002
100 %		-20	1710 699 999	-3.1	0.000 000	-0.002
100 %		-10	1710 700 005	2.7	0.000 000	0.002
100 %		0	1710 700 001	-1.4	0.000 000	-0.001
100 %		+10	1710 700 004	2.1	0.000 000	0.001
100 %		+30	1710 700 005	2.3	0.000 000	0.001
100 %		+40	1710 700 006	3.3	0.000 000	0.002
100 %		+50	1710 700 005	3.0	0.000 000	0.002
Batt. Endpoint		3.300	+20	1710 700 000	-2.6	0.000 000

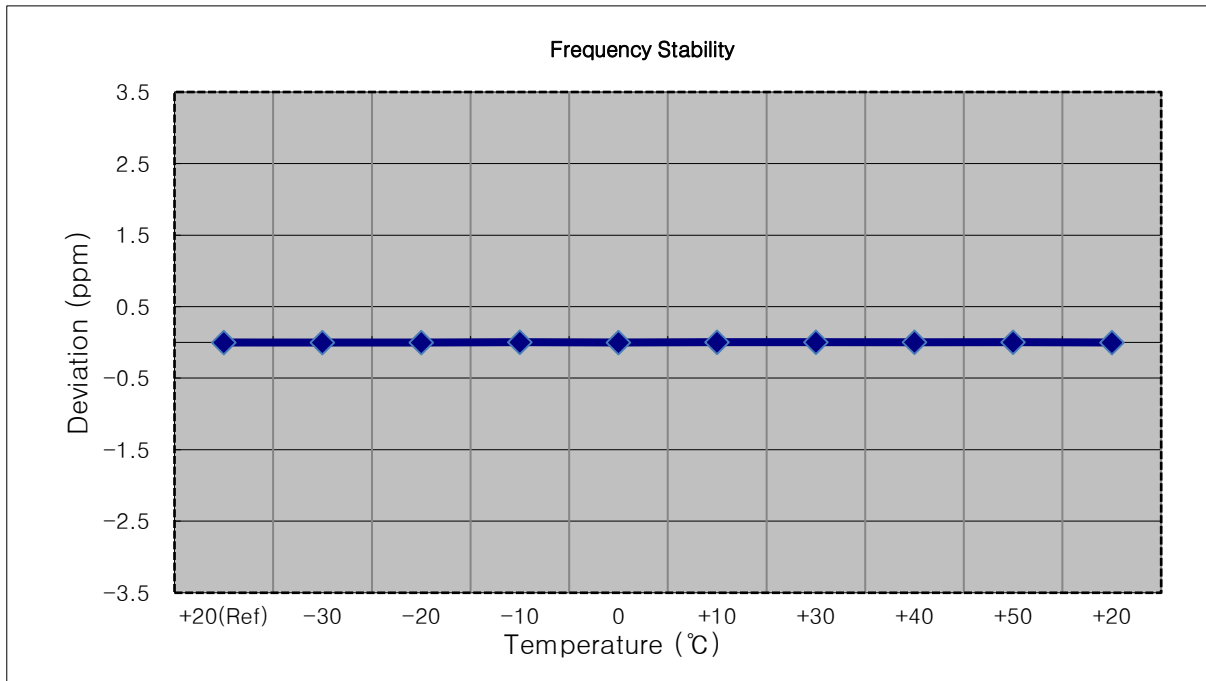


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 500 003	0.0	0.000 000	0.000
100 %		-30	1711 500 006	3.2	0.000 000	0.002
100 %		-20	1711 500 001	-1.7	0.000 000	-0.001
100 %		-10	1711 500 001	-2.1	0.000 000	-0.001
100 %		0	1711 500 007	4.3	0.000 000	0.003
100 %		+10	1711 500 006	3.2	0.000 000	0.002
100 %		+30	1711 500 007	4.1	0.000 000	0.002
100 %		+40	1711 500 006	2.8	0.000 000	0.002
100 %		+50	1711 500 006	3.1	0.000 000	0.002
Batt. Endpoint	3.300	+20	1711 500 007	3.6	0.000 000	0.002

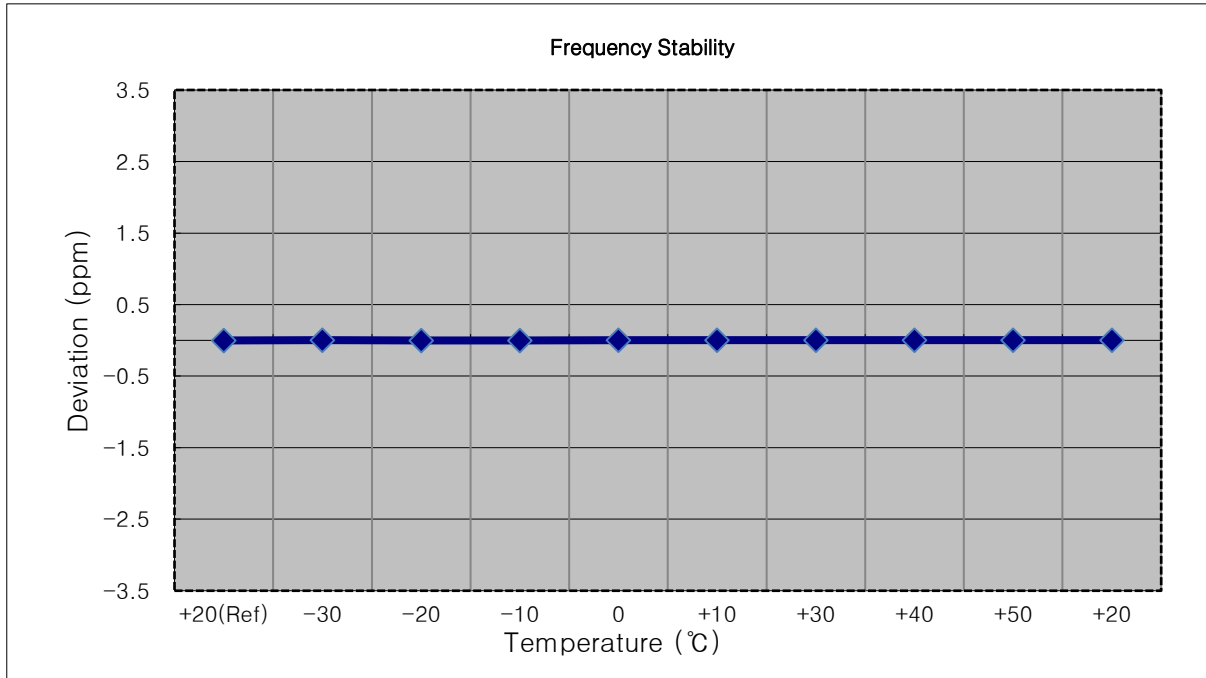


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 499 998	0.0	0.000 000	0.000
100 %		-30	1712 499 994	-4.2	0.000 000	-0.002
100 %		-20	1712 500 002	3.6	0.000 000	0.002
100 %		-10	1712 500 001	2.5	0.000 000	0.001
100 %		0	1712 500 002	3.8	0.000 000	0.002
100 %		+10	1712 499 995	-3.2	0.000 000	-0.002
100 %		+30	1712 500 001	2.9	0.000 000	0.002
100 %		+40	1712 499 994	-4.2	0.000 000	-0.002
100 %		+50	1712 499 995	-2.7	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1712 500 001	2.7	0.000 000	0.002

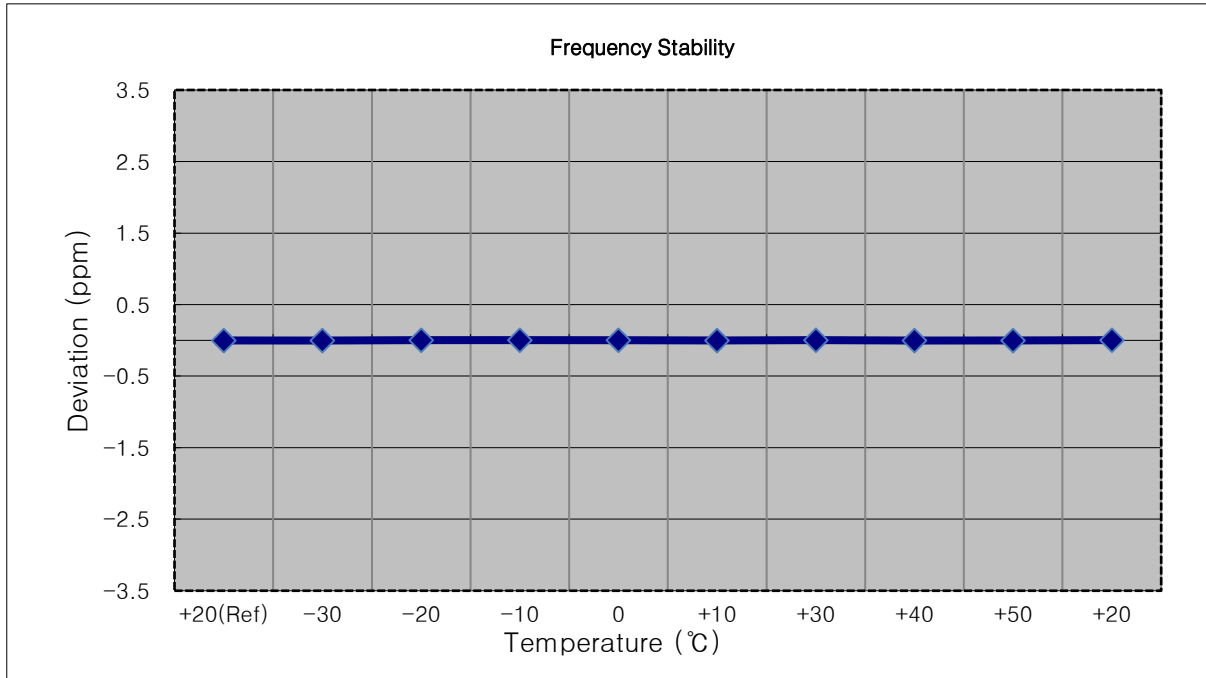


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1714 999 997	0.0	0.000 000	0.000
100 %		-30	1714 999 995	-2.1	0.000 000	-0.001
100 %		-20	1715 000 001	3.2	0.000 000	0.002
100 %		-10	1715 000 001	3.2	0.000 000	0.002
100 %		0	1714 999 995	-2.4	0.000 000	-0.001
100 %		+10	1715 000 000	3.0	0.000 000	0.002
100 %		+30	1714 999 999	2.1	0.000 000	0.001
100 %		+40	1715 000 001	3.2	0.000 000	0.002
100 %		+50	1715 000 001	3.2	0.000 000	0.002
Batt. Endpoint	3.300	+20	1715 000 001	3.2	0.000 000	0.002

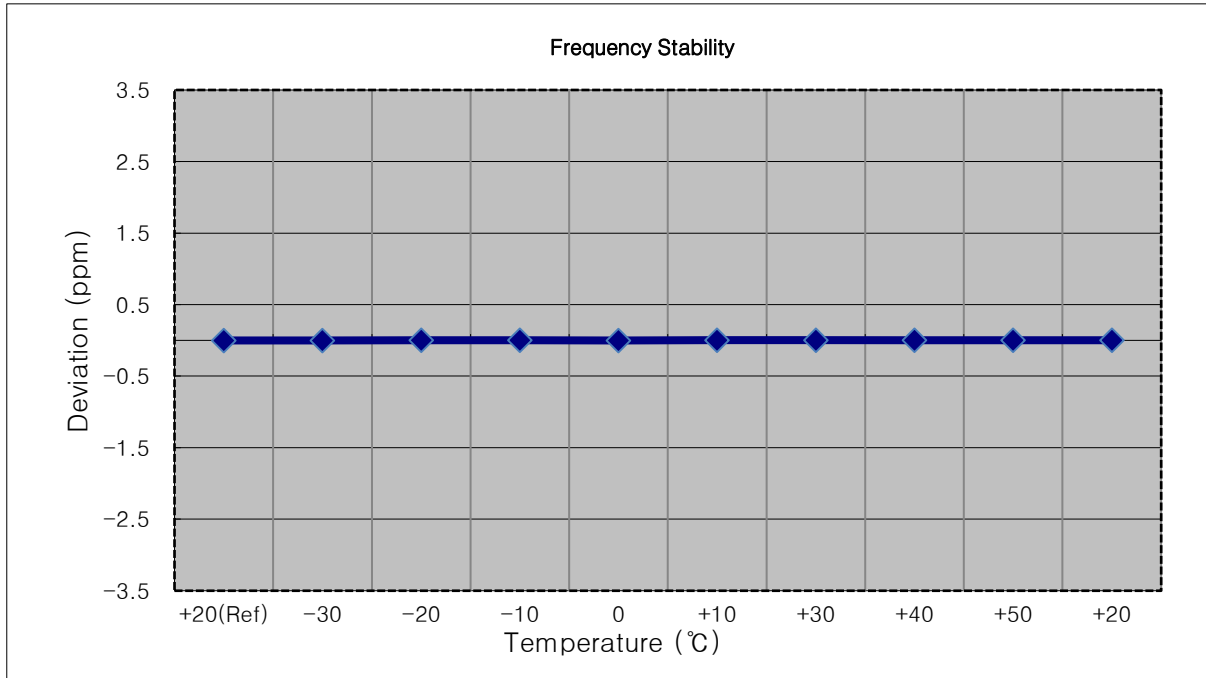


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 499 998	0.0	0.000 000	0.000
100 %		-30	1717 500 002	3.6	0.000 000	0.002
100 %		-20	1717 500 001	2.6	0.000 000	0.002
100 %		-10	1717 500 001	2.8	0.000 000	0.002
100 %		0	1717 500 001	3.1	0.000 000	0.002
100 %		+10	1717 500 001	2.8	0.000 000	0.002
100 %		+30	1717 500 002	3.4	0.000 000	0.002
100 %		+40	1717 500 001	2.4	0.000 000	0.001
100 %		+50	1717 500 001	2.7	0.000 000	0.002
Batt. Endpoint	3.300	+20	1717 500 002	3.7	0.000 000	0.002

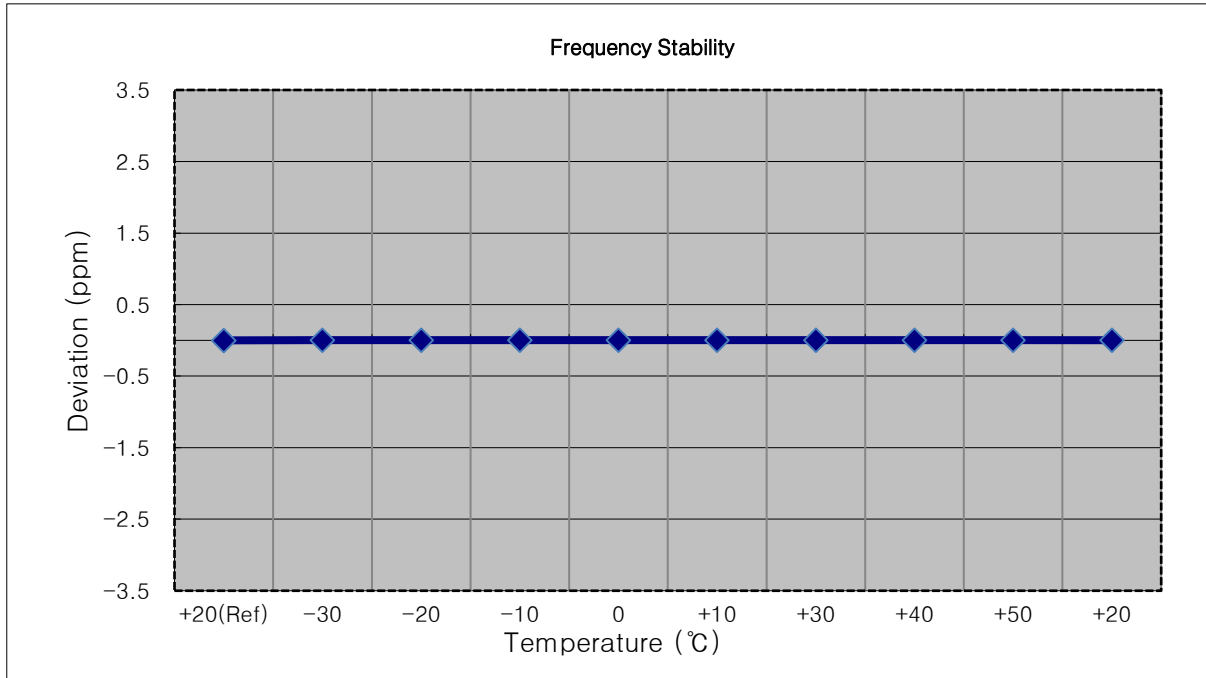


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1720 000 002	0.0	0.000 000	0.000
100 %		-30	1720 000 005	2.5	0.000 000	0.001
100 %		-20	1720 000 005	3.2	0.000 000	0.002
100 %		-10	1720 000 004	1.5	0.000 000	0.001
100 %		0	1720 000 005	2.6	0.000 000	0.002
100 %		+10	1720 000 004	2.1	0.000 000	0.001
100 %		+30	1720 000 005	2.8	0.000 000	0.002
100 %		+40	1720 000 000	-2.0	0.000 000	-0.001
100 %		+50	1720 000 005	3.0	0.000 000	0.002
Batt. Endpoint		3.300	+20	1720 000 004	2.3	0.000 000

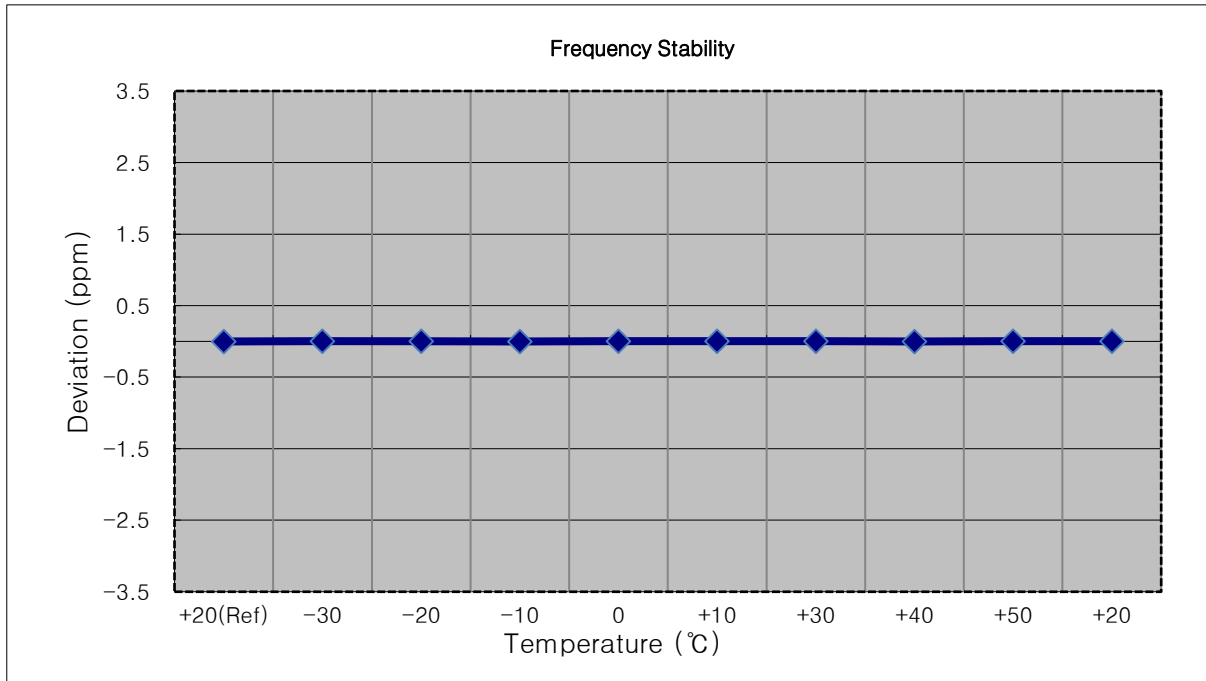


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1745 000 006	3.7	0.000 000	0.002
100 %		-20	1744 999 999	-2.7	0.000 000	-0.002
100 %		-10	1745 000 004	1.8	0.000 000	0.001
100 %		0	1744 999 999	-3.3	0.000 000	-0.002
100 %		+10	1744 999 999	-3.3	0.000 000	-0.002
100 %		+30	1745 000 000	-1.8	0.000 000	-0.001
100 %		+40	1744 999 998	-4.4	0.000 000	-0.003
100 %		+50	1745 000 007	4.4	0.000 000	0.003
Batt. Endpoint	3.300	+20	1745 000 005	2.8	0.000 000	0.002

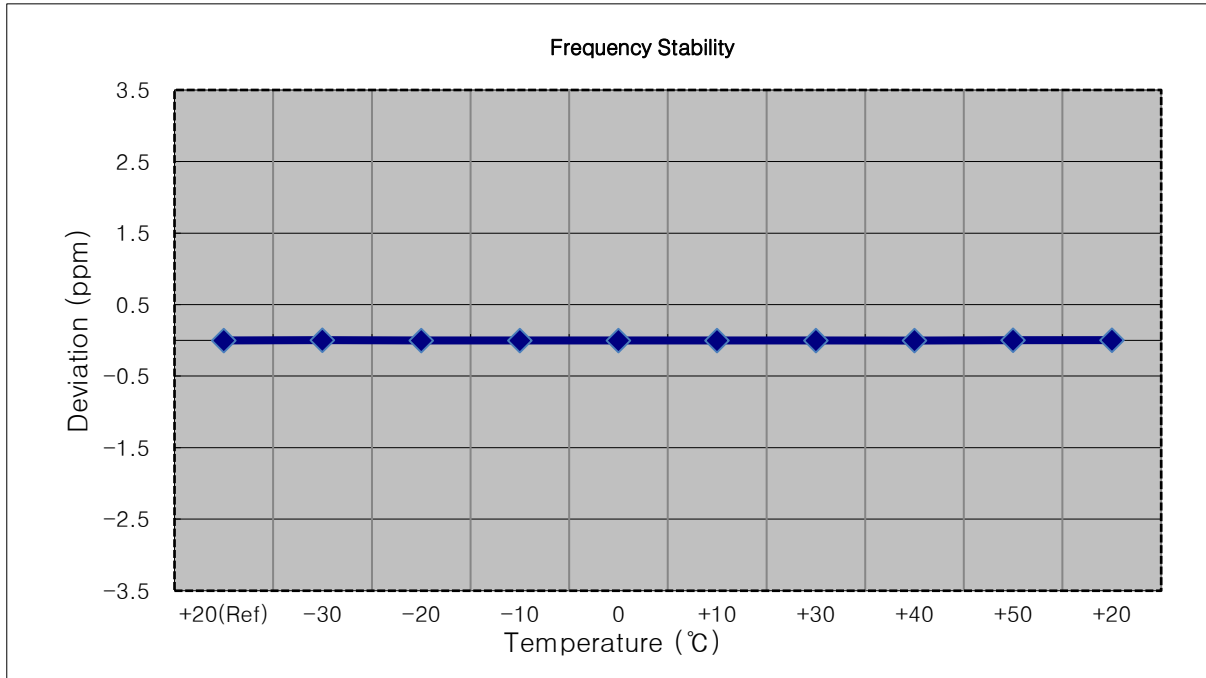


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1744 999 999	-3.6	0.000 000	-0.002
100 %		-20	1745 000 007	4.5	0.000 000	0.003
100 %		-10	1744 999 999	-4.2	0.000 000	-0.002
100 %		0	1745 000 005	2.1	0.000 000	0.001
100 %		+10	1745 000 006	3.5	0.000 000	0.002
100 %		+30	1745 000 000	-2.7	0.000 000	-0.002
100 %		+40	1745 000 005	2.6	0.000 000	0.001
100 %		+50	1745 000 005	2.2	0.000 000	0.001
Batt. Endpoint	3.300	+20	1745 000 007	3.8	0.000 000	0.002

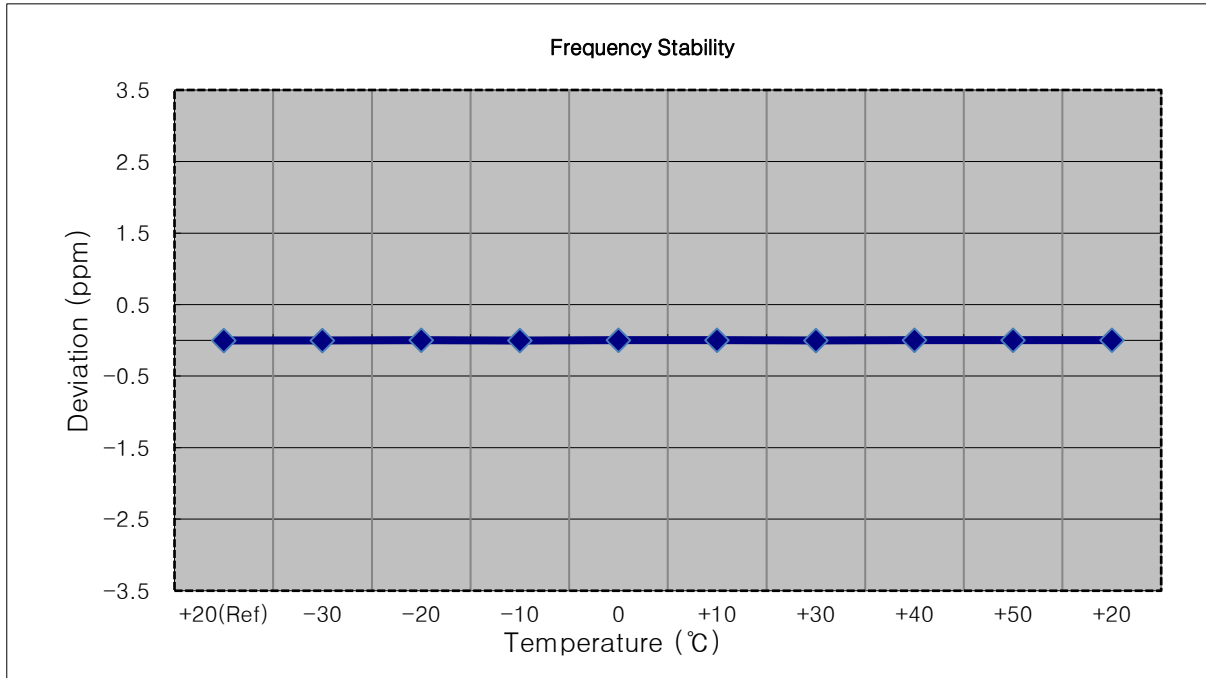


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 007	2.8	0.000 000	0.002
100 %		-20	1745 000 007	2.5	0.000 000	0.001
100 %		-10	1745 000 008	4.0	0.000 000	0.002
100 %		0	1745 000 007	3.3	0.000 000	0.002
100 %		+10	1745 000 008	4.4	0.000 000	0.003
100 %		+30	1745 000 009	5.0	0.000 000	0.003
100 %		+40	1745 000 007	2.7	0.000 000	0.002
100 %		+50	1745 000 008	3.8	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 006	2.0	0.000 000	0.001

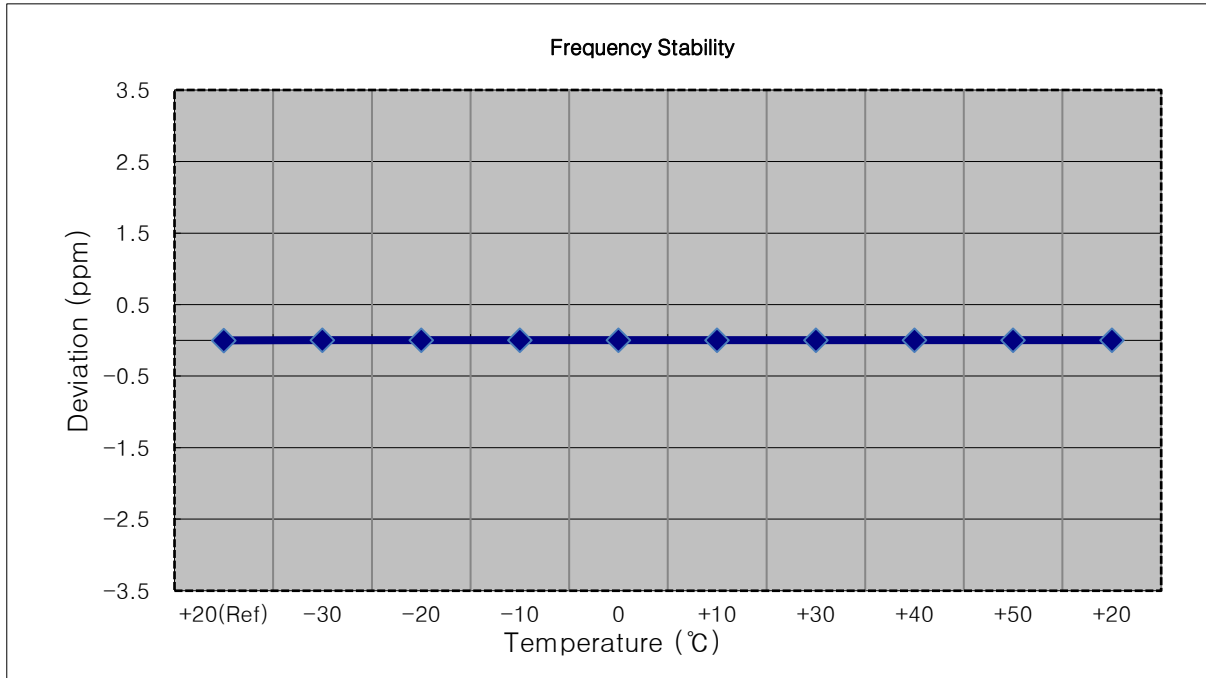


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 005	0.0	0.000 000	0.000
100 %		-30	1745 000 010	4.2	0.000 000	0.002
100 %		-20	1745 000 009	3.7	0.000 000	0.002
100 %		-10	1745 000 008	2.2	0.000 000	0.001
100 %		0	1745 000 007	1.6	0.000 000	0.001
100 %		+10	1745 000 002	-3.2	0.000 000	-0.002
100 %		+30	1745 000 008	2.5	0.000 000	0.001
100 %		+40	1745 000 009	4.0	0.000 000	0.002
100 %		+50	1745 000 008	3.0	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 010	4.2	0.000 000	0.002

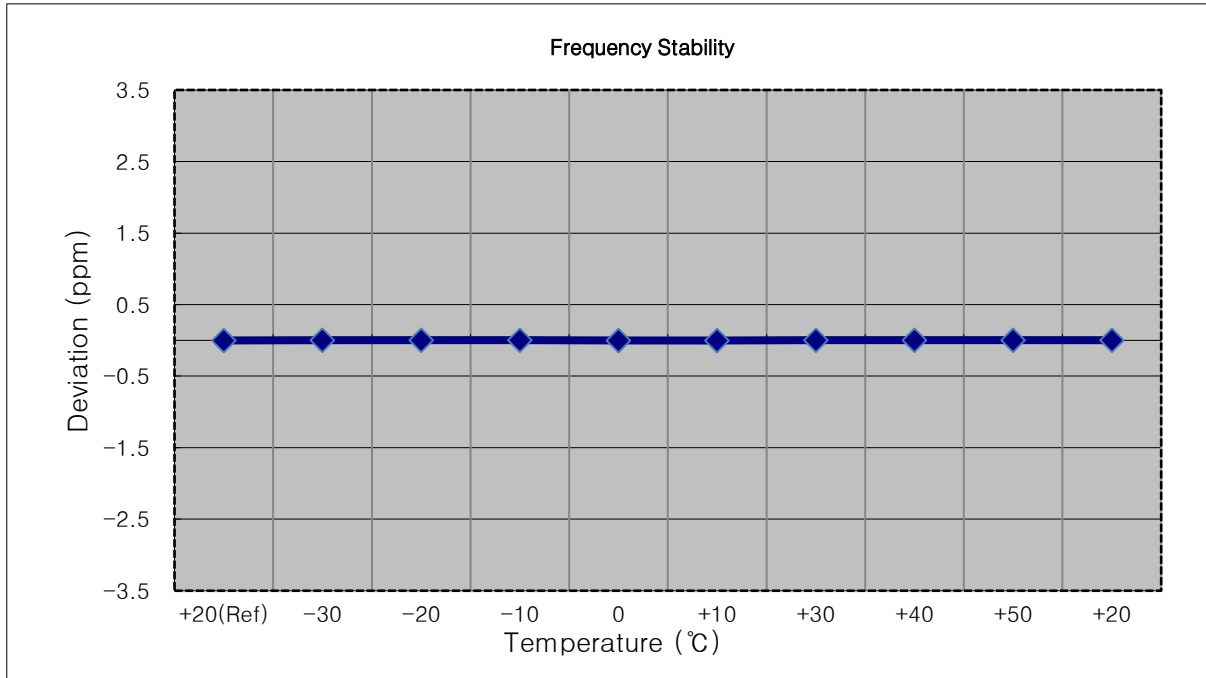


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1745 000 006	3.6	0.000 000	0.002
100 %		-20	1745 000 004	2.1	0.000 000	0.001
100 %		-10	1745 000 005	2.8	0.000 000	0.002
100 %		0	1745 000 006	4.2	0.000 000	0.002
100 %		+10	1745 000 005	2.5	0.000 000	0.001
100 %		+30	1745 000 005	2.7	0.000 000	0.002
100 %		+40	1745 000 006	3.5	0.000 000	0.002
100 %		+50	1745 000 006	3.5	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 004	2.2	0.000 000	0.001

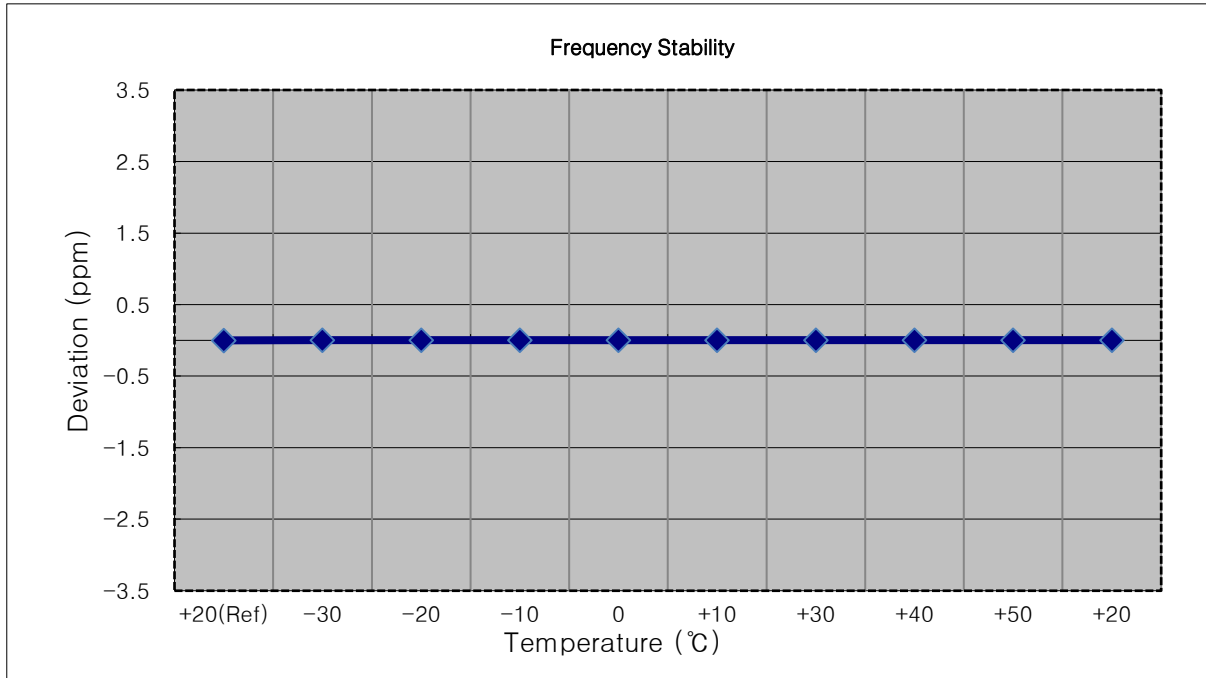


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 008	3.3	0.000 000	0.002
100 %		-20	1745 000 008	3.9	0.000 000	0.002
100 %		-10	1745 000 006	2.0	0.000 000	0.001
100 %		0	1745 000 007	3.1	0.000 000	0.002
100 %		+10	1745 000 003	-1.5	0.000 000	-0.001
100 %		+30	1745 000 009	4.4	0.000 000	0.003
100 %		+40	1745 000 008	3.3	0.000 000	0.002
100 %		+50	1745 000 006	1.9	0.000 000	0.001
Batt. Endpoint	3.300	+20	1745 000 008	3.6	0.000 000	0.002

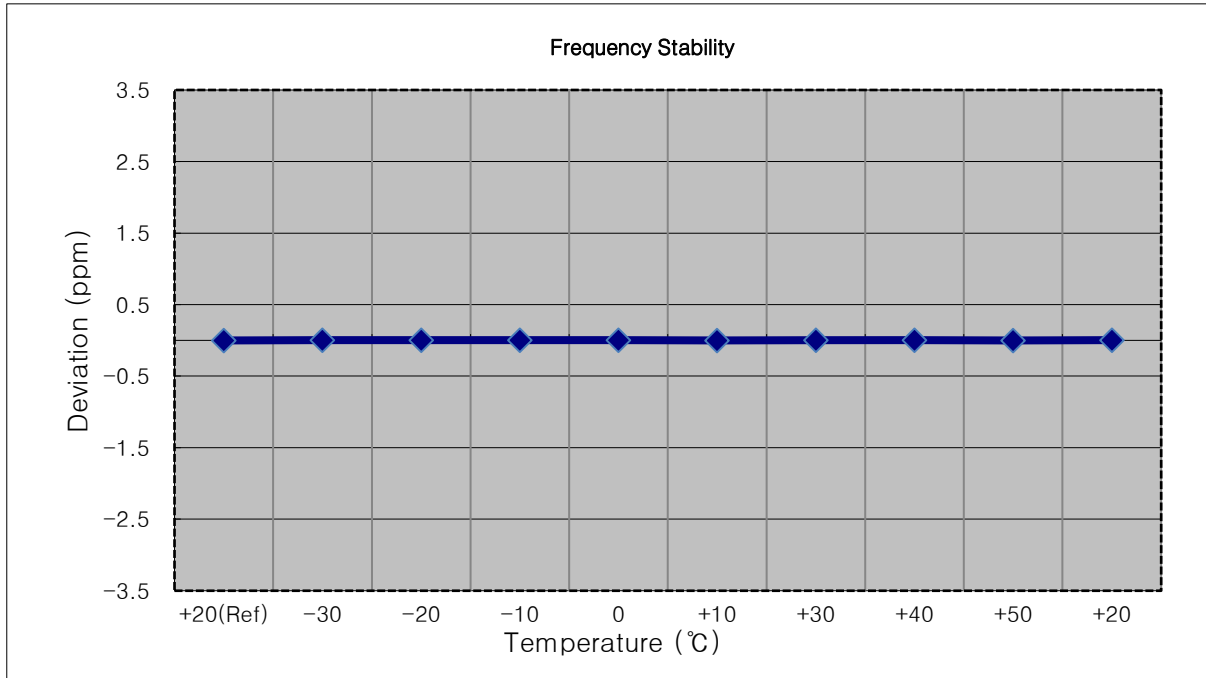


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1779 300 003	0.0	0.000 000	0.000
100 %		-30	1779 300 008	4.2	0.000 000	0.002
100 %		-20	1779 300 000	-3.3	0.000 000	-0.002
100 %		-10	1779 300 008	4.3	0.000 000	0.002
100 %		0	1779 300 008	4.9	0.000 000	0.003
100 %		+10	1779 300 006	3.1	0.000 000	0.002
100 %		+30	1779 300 006	2.8	0.000 000	0.002
100 %		+40	1779 300 009	6.1	0.000 000	0.003
100 %		+50	1779 300 006	2.9	0.000 000	0.002
Batt. Endpoint	3.300	+20	1779 300 000	-3.7	0.000 000	-0.002

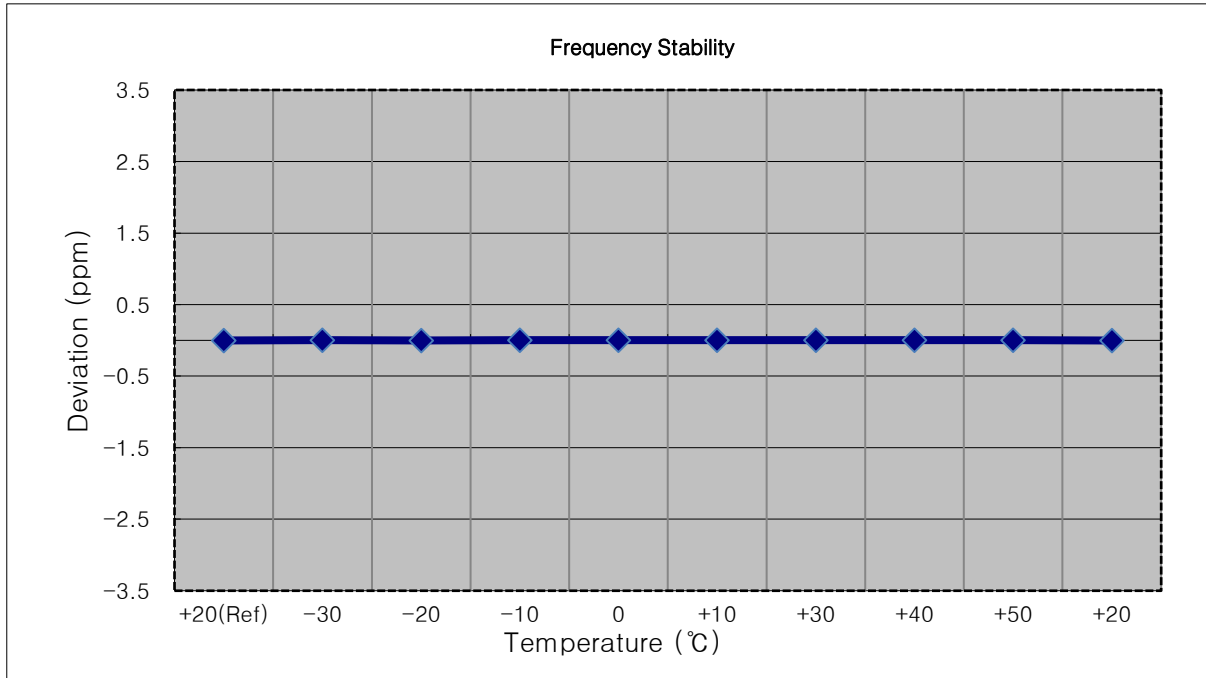


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	1778 499 999	0.0	0.000 000	0.000
100%		-30	1778 500 001	2.1	0.000 000	0.001
100%		-20	1778 500 002	3.0	0.000 000	0.002
100%		-10	1778 499 998	-1.1	0.000 000	-0.001
100%		0	1778 500 002	2.5	0.000 000	0.001
100%		+10	1778 500 002	3.1	0.000 000	0.002
100%		+30	1778 500 002	2.8	0.000 000	0.002
100%		+40	1778 500 000	0.8	0.000 000	0.000
100%		+50	1778 499 998	-0.8	0.000 000	0.000
Batt. Endpoint	3.300	+20	1778 500 000	1.1	0.000 000	0.001

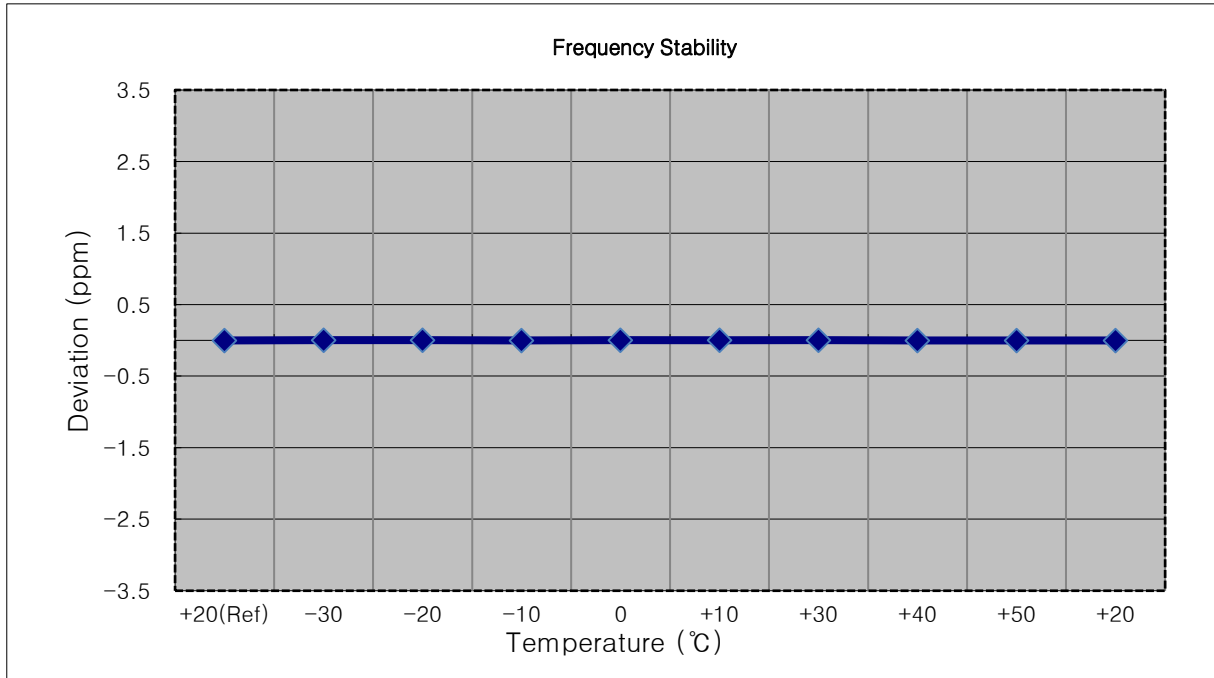


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.880	+20(Ref)	1777 499 999	0.0	0.000 000	0.000
100%		-30	1777 500 000	1.1	0.000 000	0.001
100%		-20	1777 499 997	-2.0	0.000 000	-0.001
100%		-10	1777 500 001	2.4	0.000 000	0.001
100%		0	1777 500 002	2.7	0.000 000	0.002
100%		+10	1777 500 003	3.6	0.000 000	0.002
100%		+30	1777 500 002	3.1	0.000 000	0.002
100%		+40	1777 500 001	2.2	0.000 000	0.001
100%		+50	1777 500 002	2.5	0.000 000	0.001
Batt. Endpoint	3.300	+20	1777 500 002	3.1	0.000 000	0.002

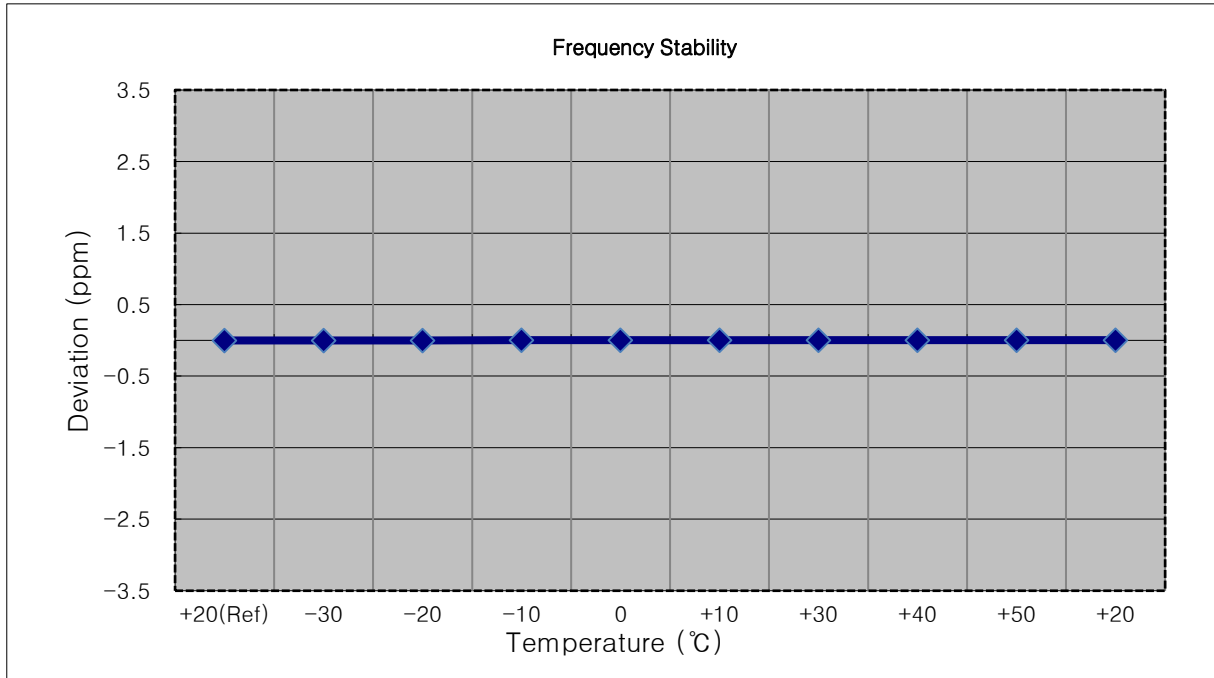


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1775 000 003	0.0	0.000 000	0.000
100 %		-30	1775 000 006	3.4	0.000 000	0.002
100 %		-20	1775 000 007	4.1	0.000 000	0.002
100 %		-10	1775 000 006	3.7	0.000 000	0.002
100 %		0	1775 000 006	3.8	0.000 000	0.002
100 %		+10	1775 000 005	2.7	0.000 000	0.002
100 %		+30	1775 000 000	-2.9	0.000 000	-0.002
100 %		+40	1775 000 005	2.4	0.000 000	0.001
100 %		+50	1775 000 005	2.6	0.000 000	0.001
Batt. Endpoint		3.300	+20	1774 999 999	-3.8	0.000 000

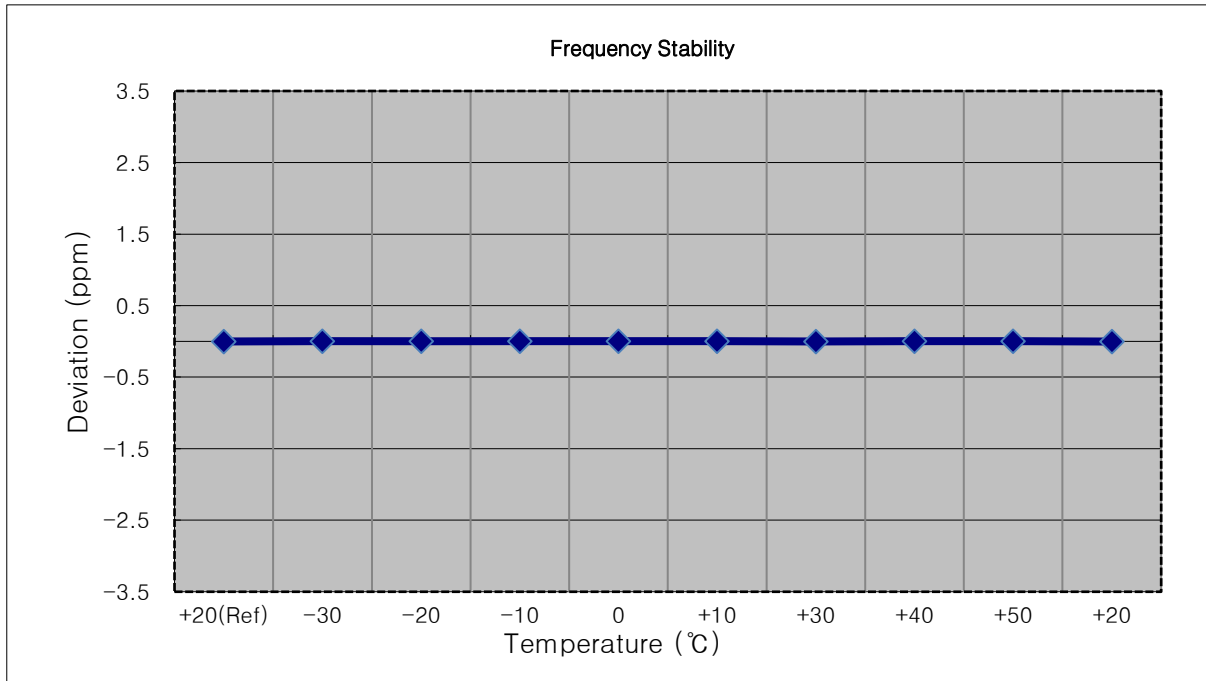


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1772 500 004	0.0	0.000 000	0.000
100 %		-30	1772 500 008	3.6	0.000 000	0.002
100 %		-20	1772 500 009	4.4	0.000 000	0.002
100 %		-10	1772 500 008	3.7	0.000 000	0.002
100 %		0	1772 500 008	4.0	0.000 000	0.002
100 %		+10	1772 500 008	4.2	0.000 000	0.002
100 %		+30	1772 500 008	3.8	0.000 000	0.002
100 %		+40	1772 500 007	3.3	0.000 000	0.002
100 %		+50	1772 500 008	4.1	0.000 000	0.002
Batt. Endpoint		3.300	+20	1772 500 006	2.3	0.000 000

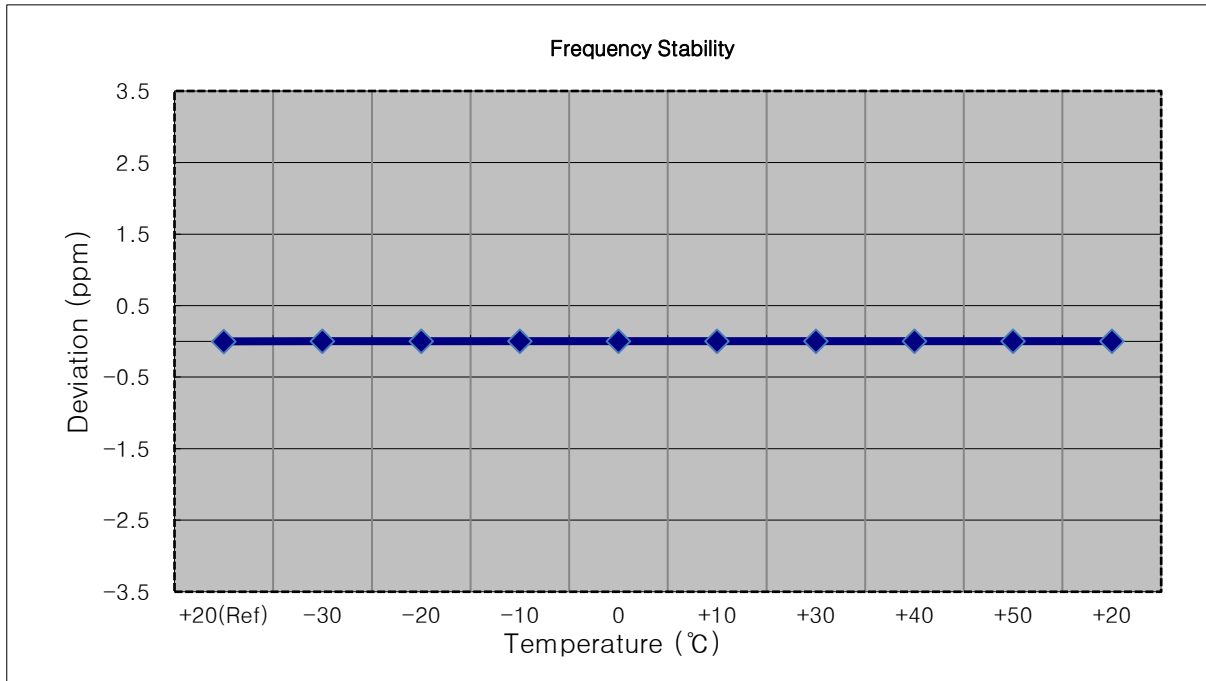

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1770 000 003	0.0	0.000 000	0.000
100 %		-30	1769 999 999	-3.1	0.000 000	-0.002
100 %		-20	1769 999 998	-4.4	0.000 000	-0.002
100 %		-10	1770 000 007	4.6	0.000 000	0.003
100 %		0	1770 000 005	2.8	0.000 000	0.002
100 %		+10	1770 000 005	2.5	0.000 000	0.001
100 %		+30	1770 000 006	3.6	0.000 000	0.002
100 %		+40	1770 000 006	3.3	0.000 000	0.002
100 %		+50	1770 000 007	4.5	0.000 000	0.003
Batt. Endpoint	3.300	+20	1770 000 006	3.5	0.000 000	0.002

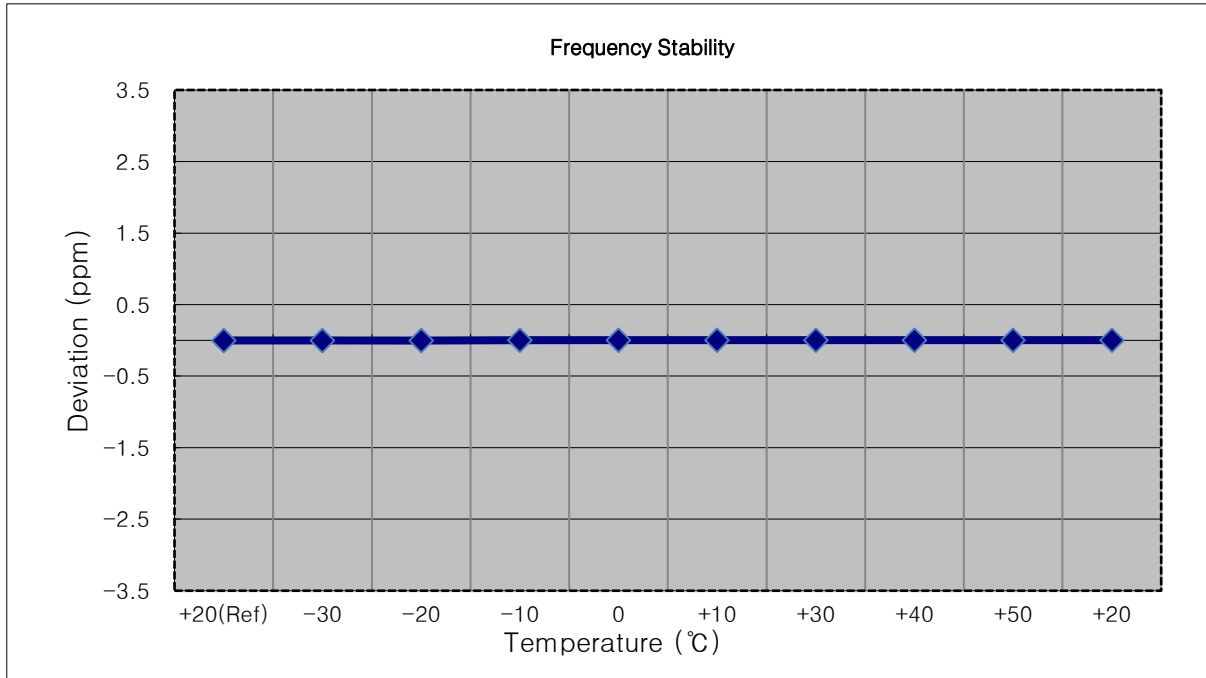


9. TEST PLOTS

BW1.4M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW1.4M_BandEdge_Lowest Channel_QPSK_FullRB(2)

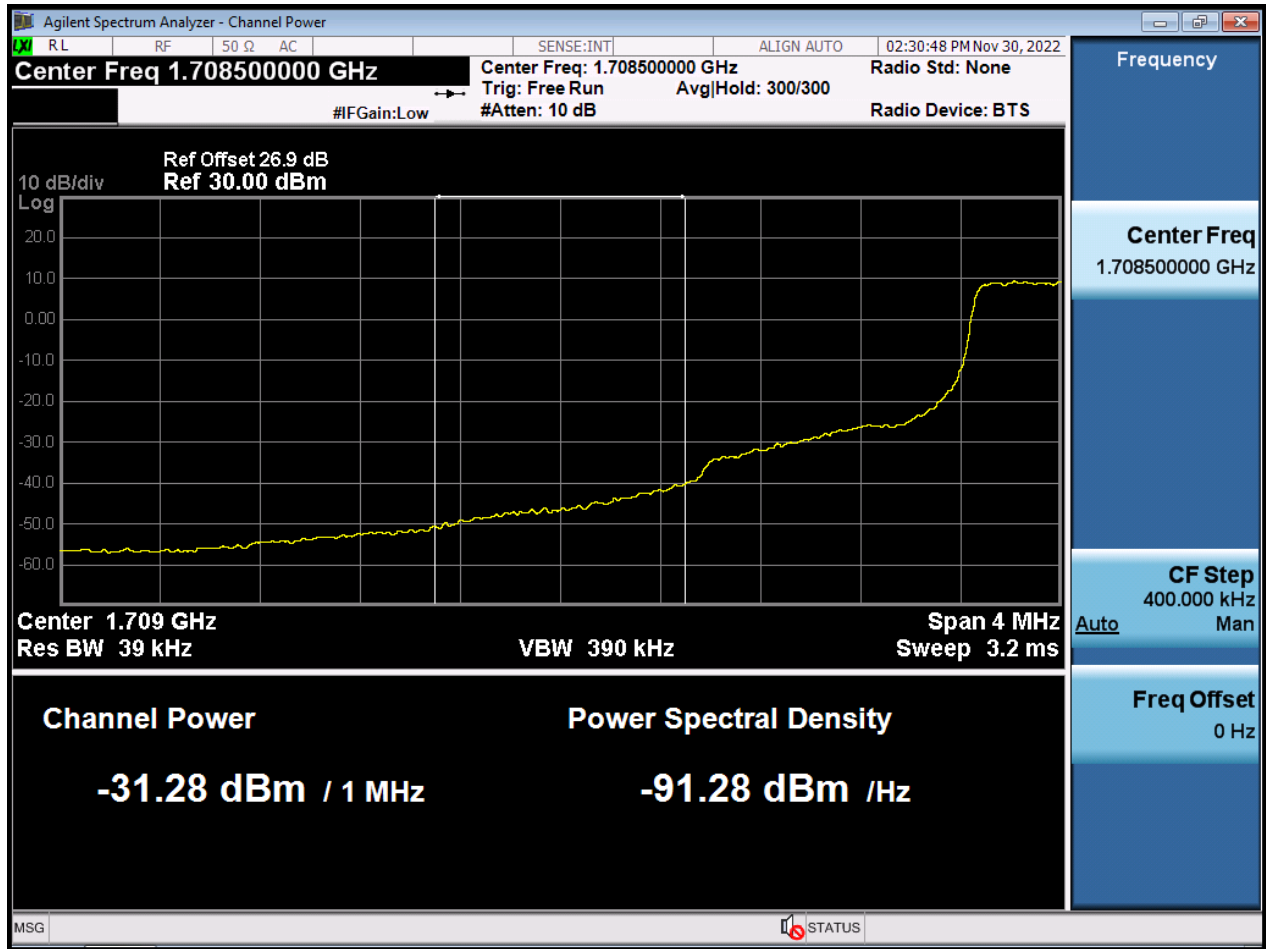


BW1.4M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW1.4M_BandEdge_Highest Channel_QPSK_FullRB(2)

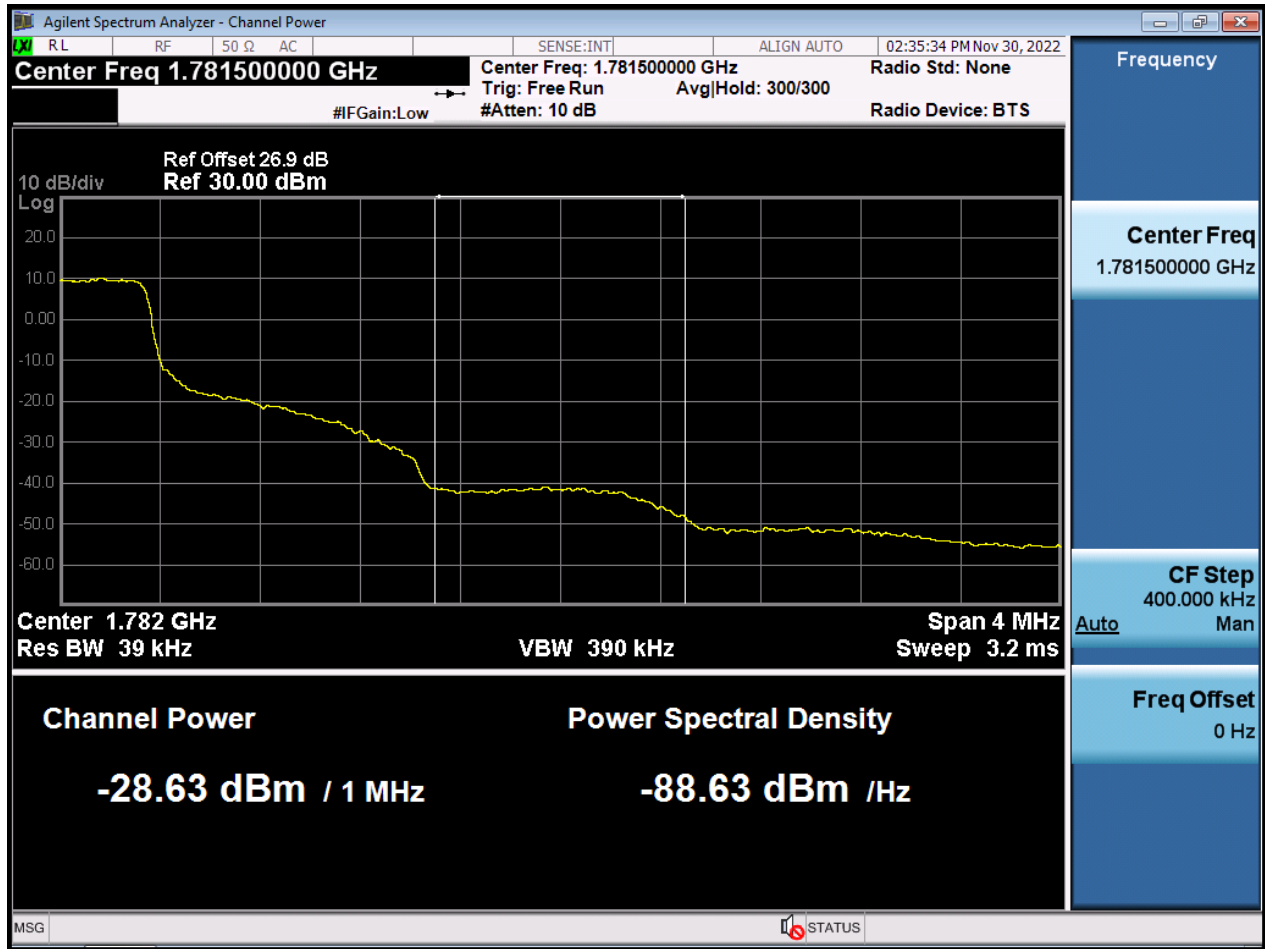

BW1.4M_BandEdge_Lowest Channel_QPSK_1RB

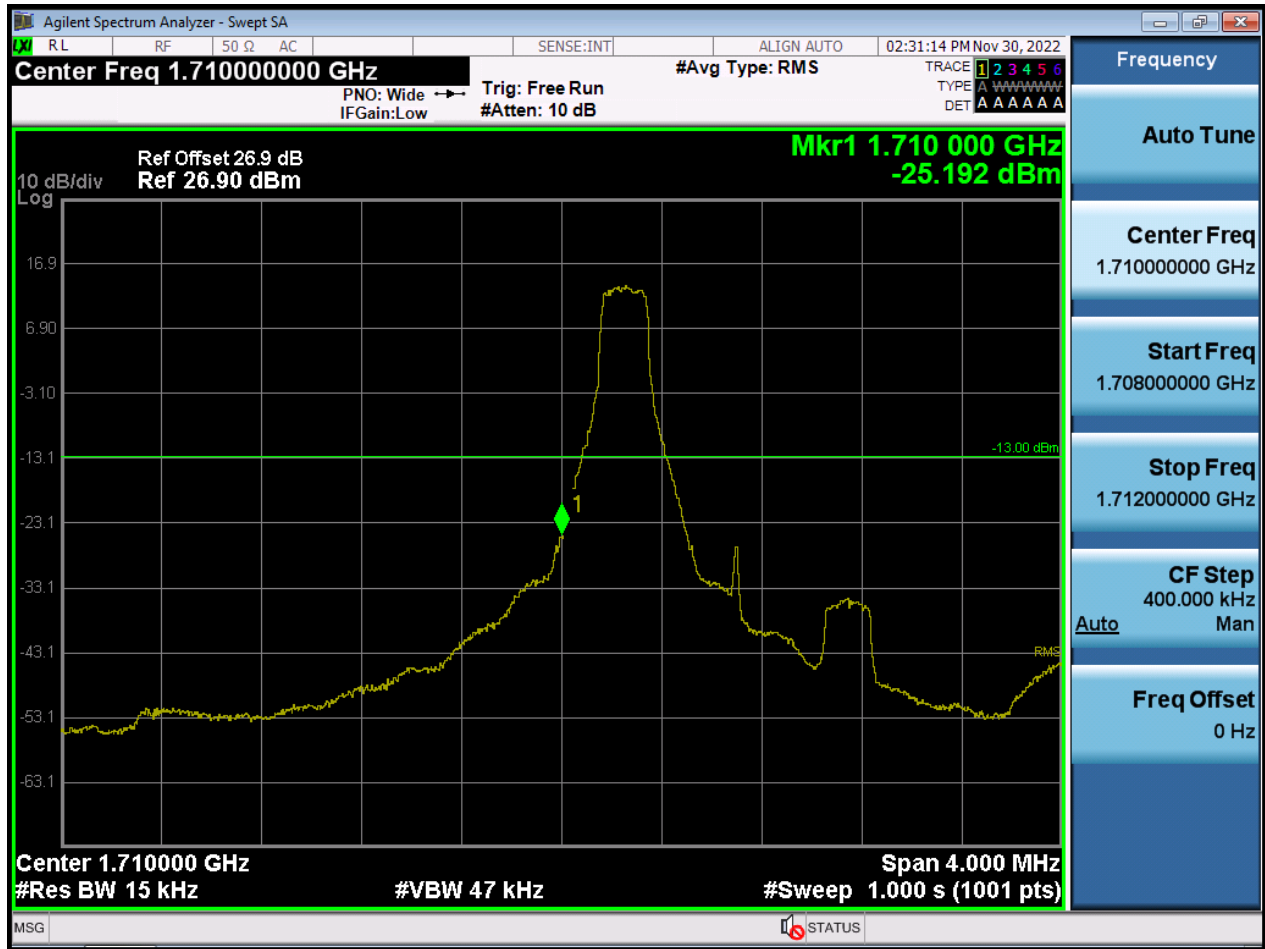


BW1.4M_BandEdge_Highest Channel_QPSK_1RB

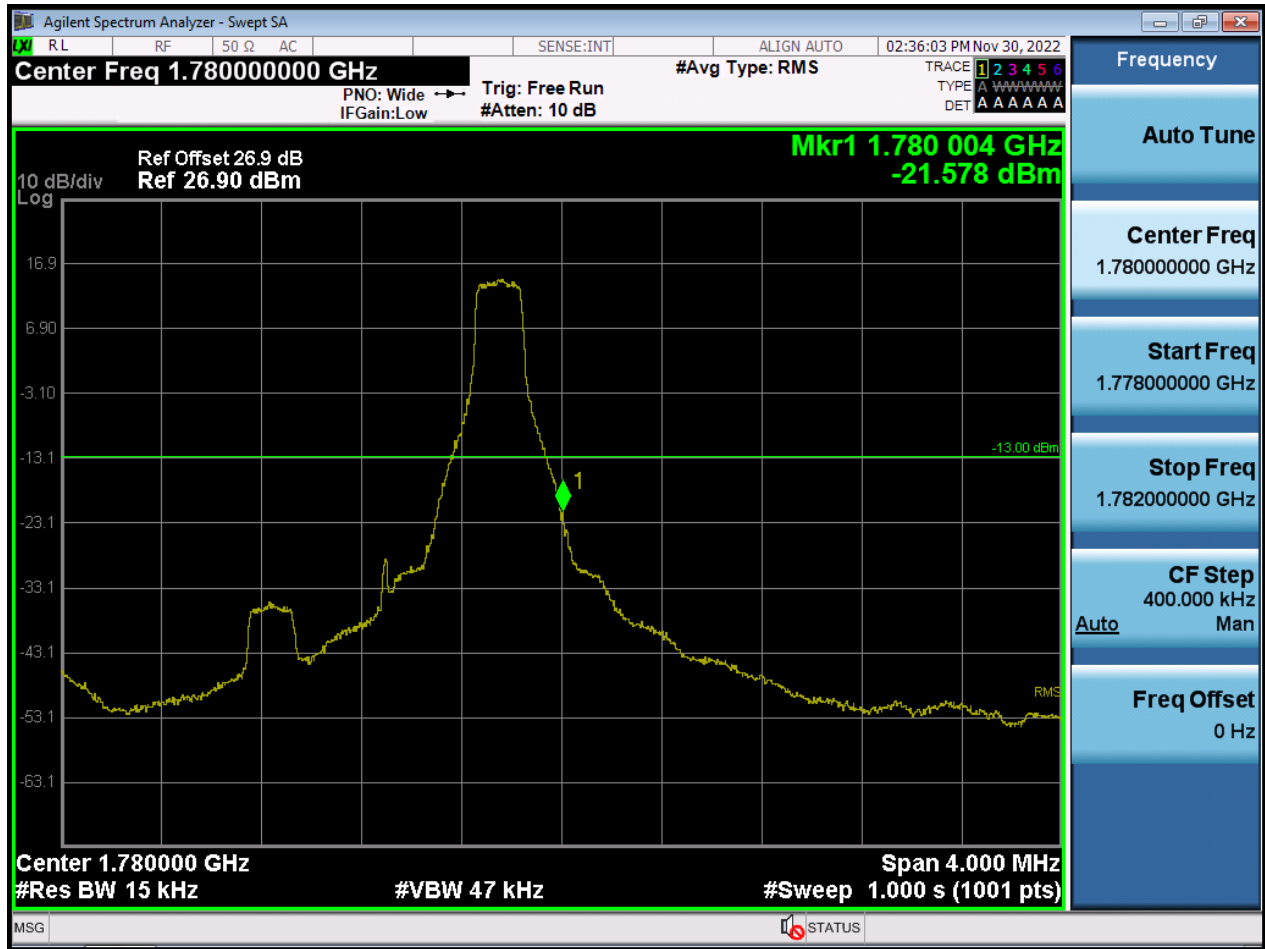

BW3M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW3M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

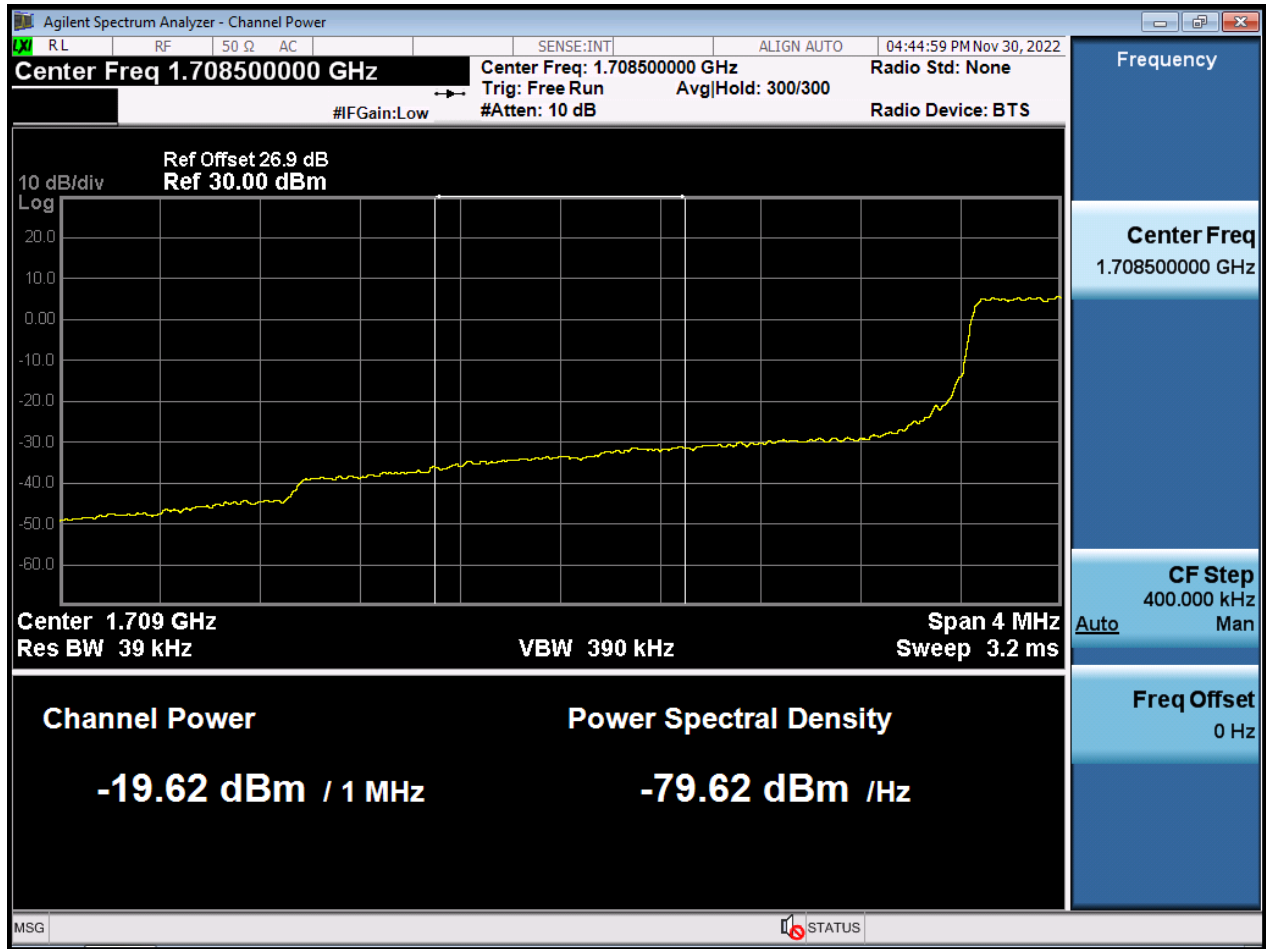


BW3M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW3M_BandEdge_Highest Channel_QPSK_FullIRB(2)

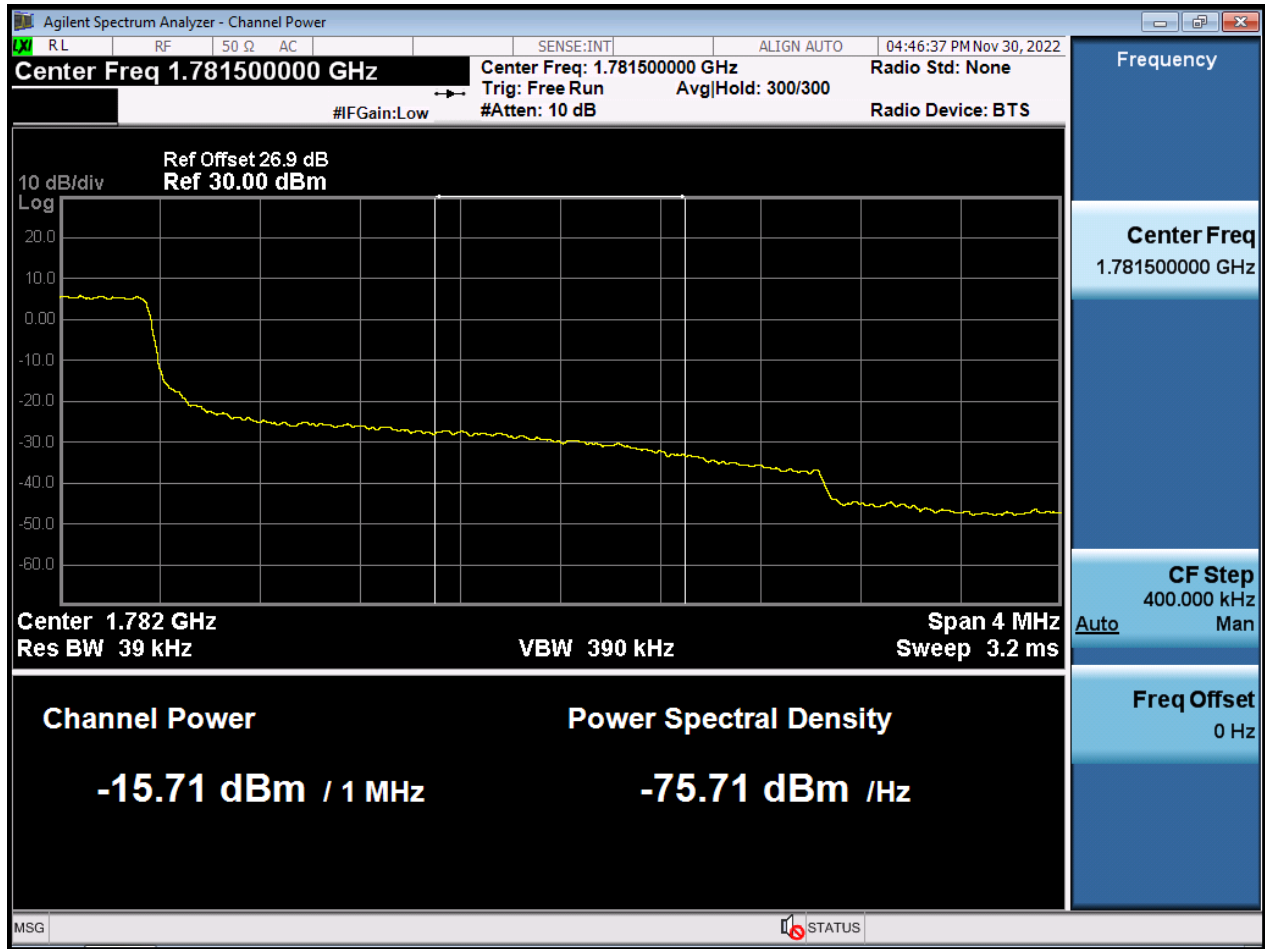

BW3M_BandEdge_Lowest Channel_QPSK_1RB

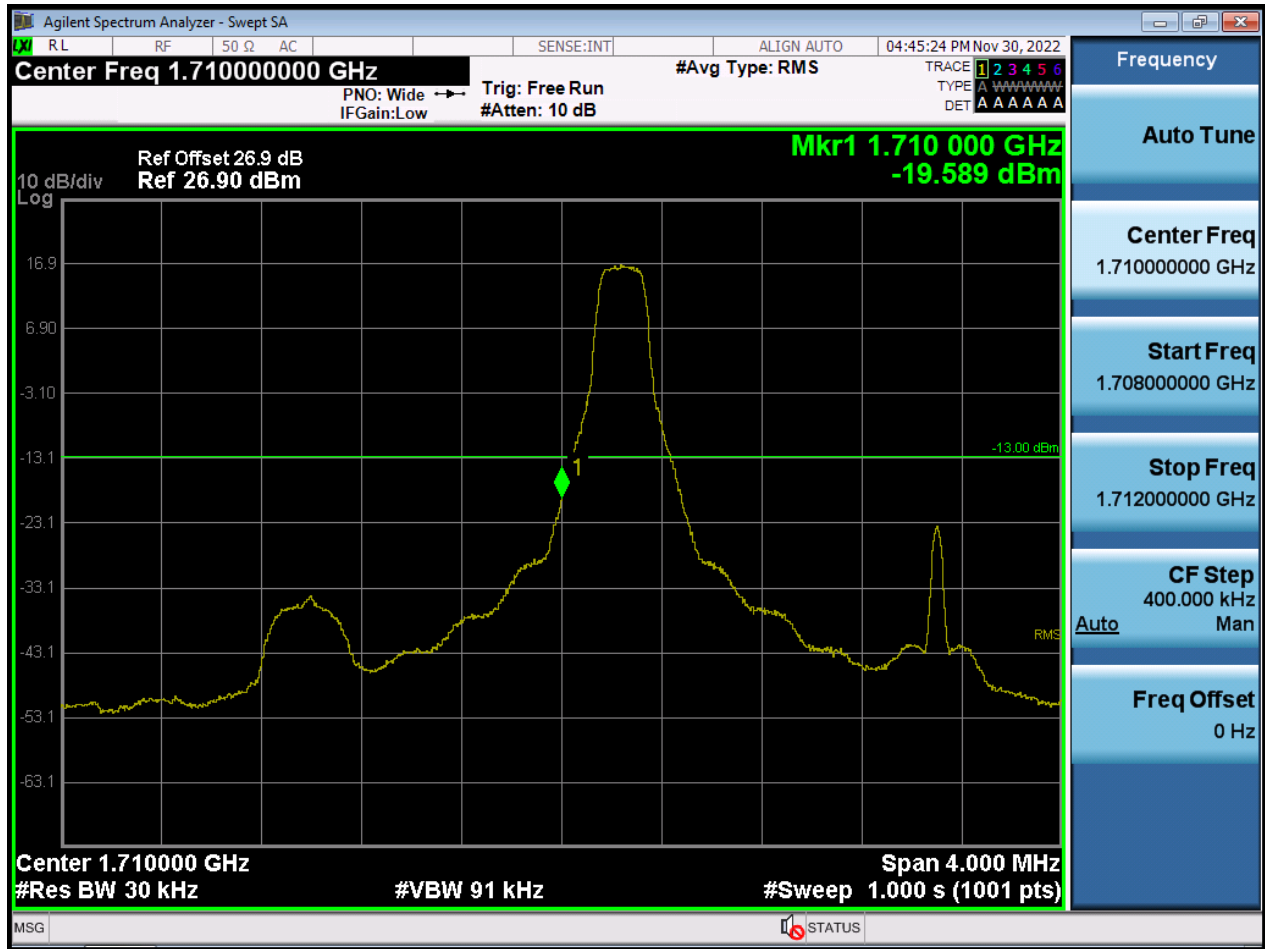


BW3M_BandEdge_Highest Channel_QPSK_1RB

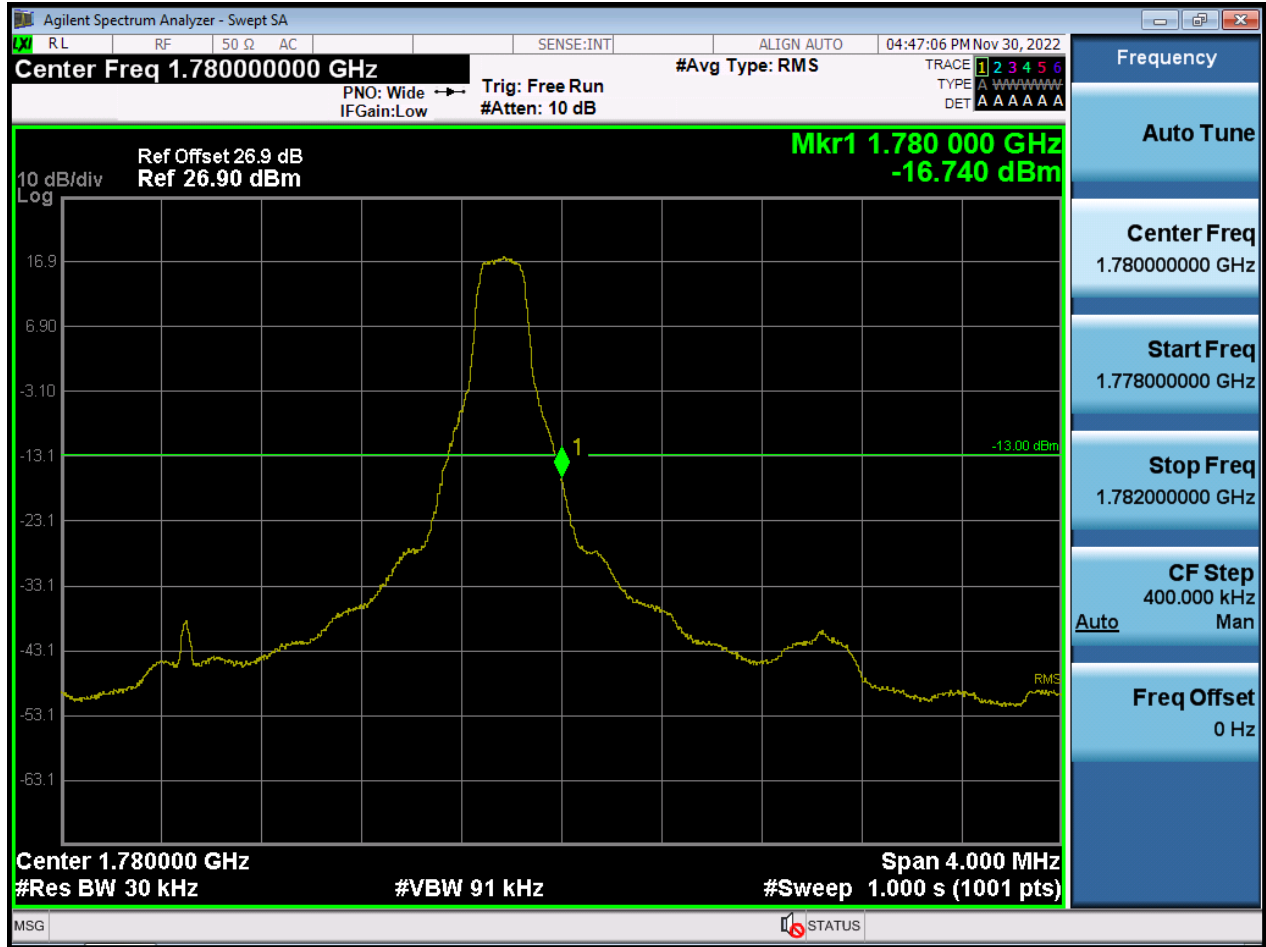

BW5M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW5M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

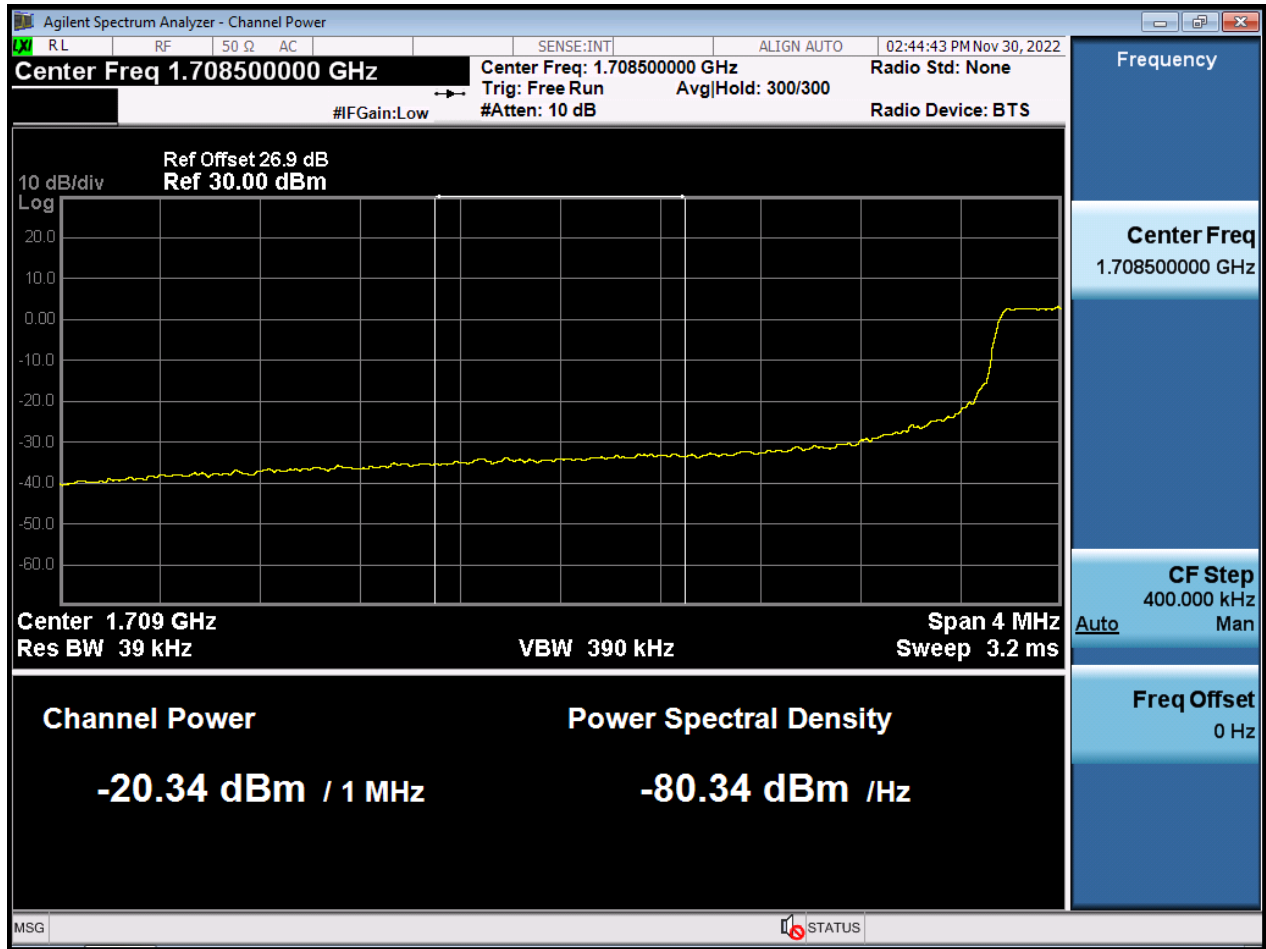

BW5M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW5M_BandEdge_Highest Channel_QPSK_FullIRB(2)

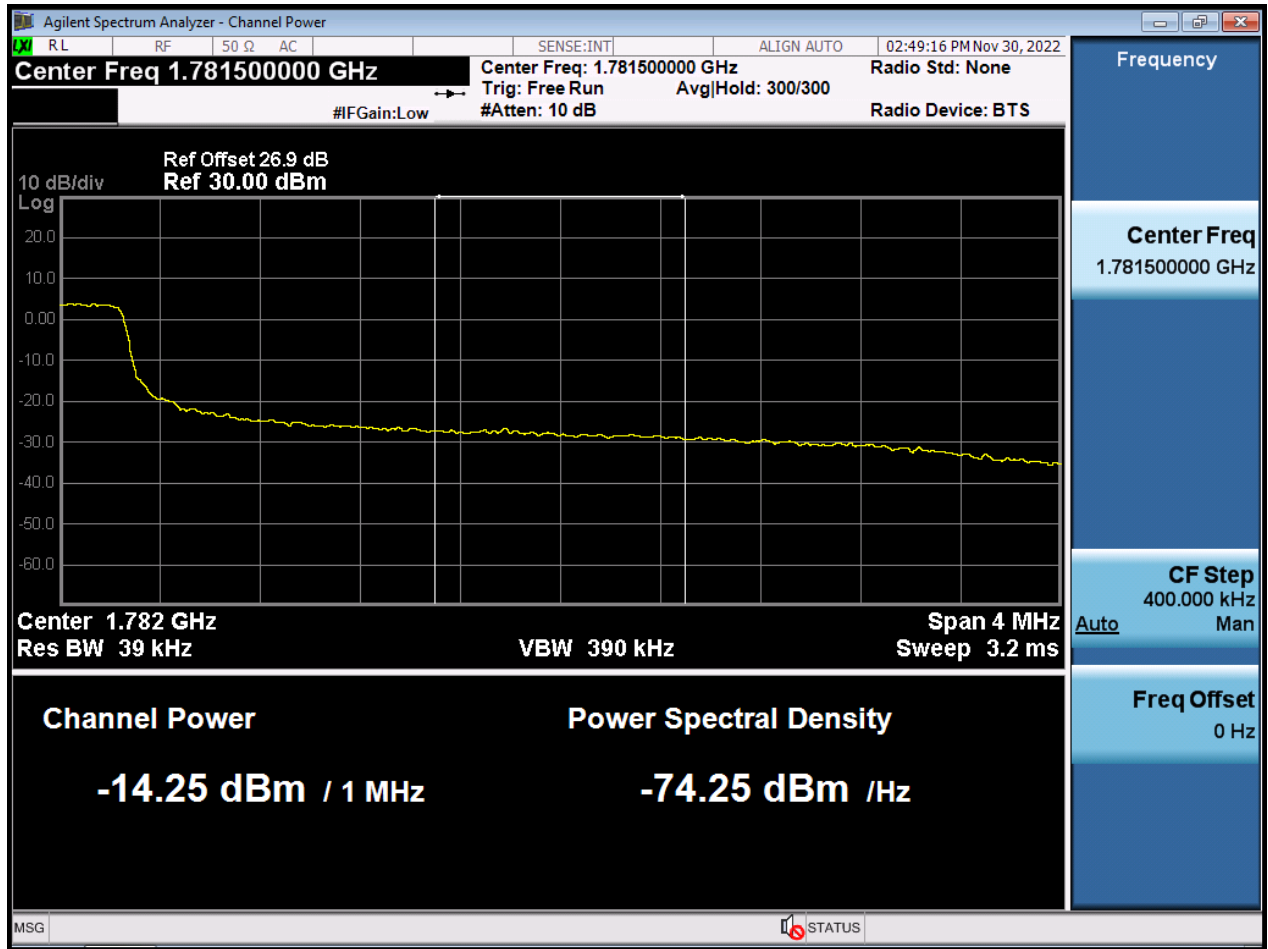

BW5M_BandEdge_Lowest Channel_QPSK_1RB




BW5M_BandEdge_Highest Channel_QPSK_1RB



BW10M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW10M_BandEdge_Lowest Channel_QPSK_FullRB(2)

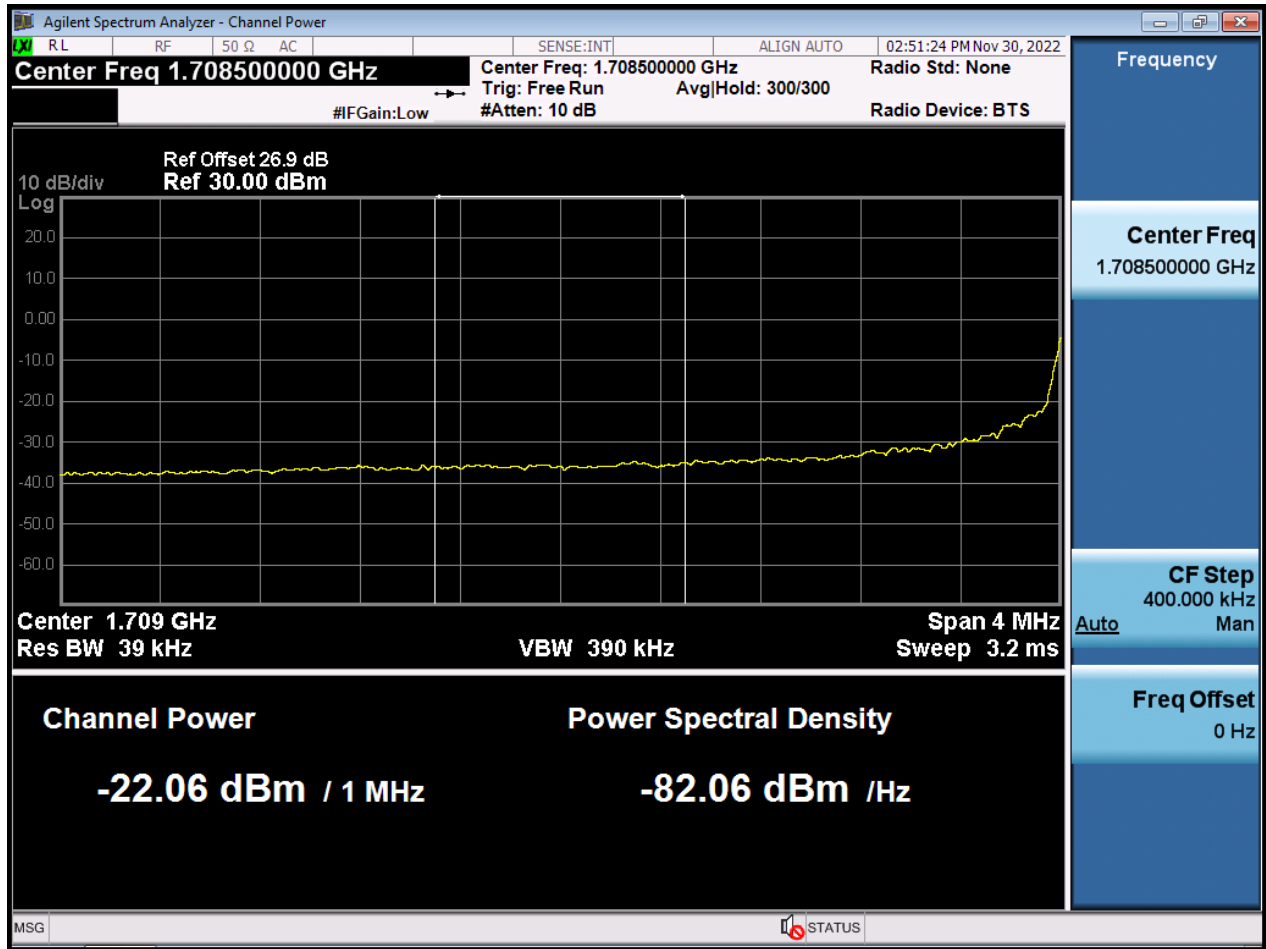

BW10M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW10M_BandEdge_Highest Channel_QPSK_FullIRB(2)

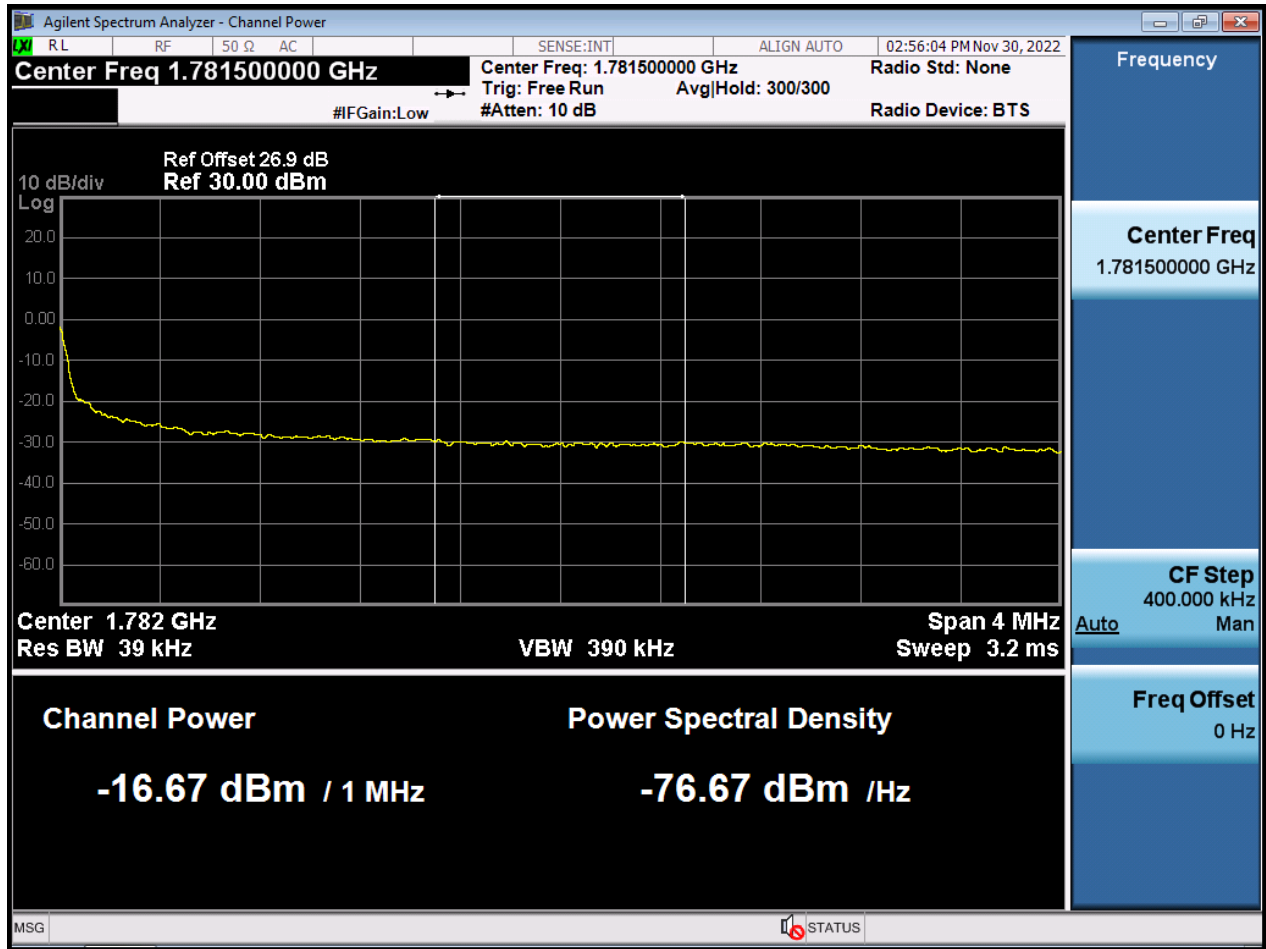

BW10M_BandEdge_Lowest Channel_QPSK_1RB




BW10M_BandEdge_Highest Channel_QPSK_1RB



BW15M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW15M_BandEdge_Lowest Channel_QPSK_FullRB(2)

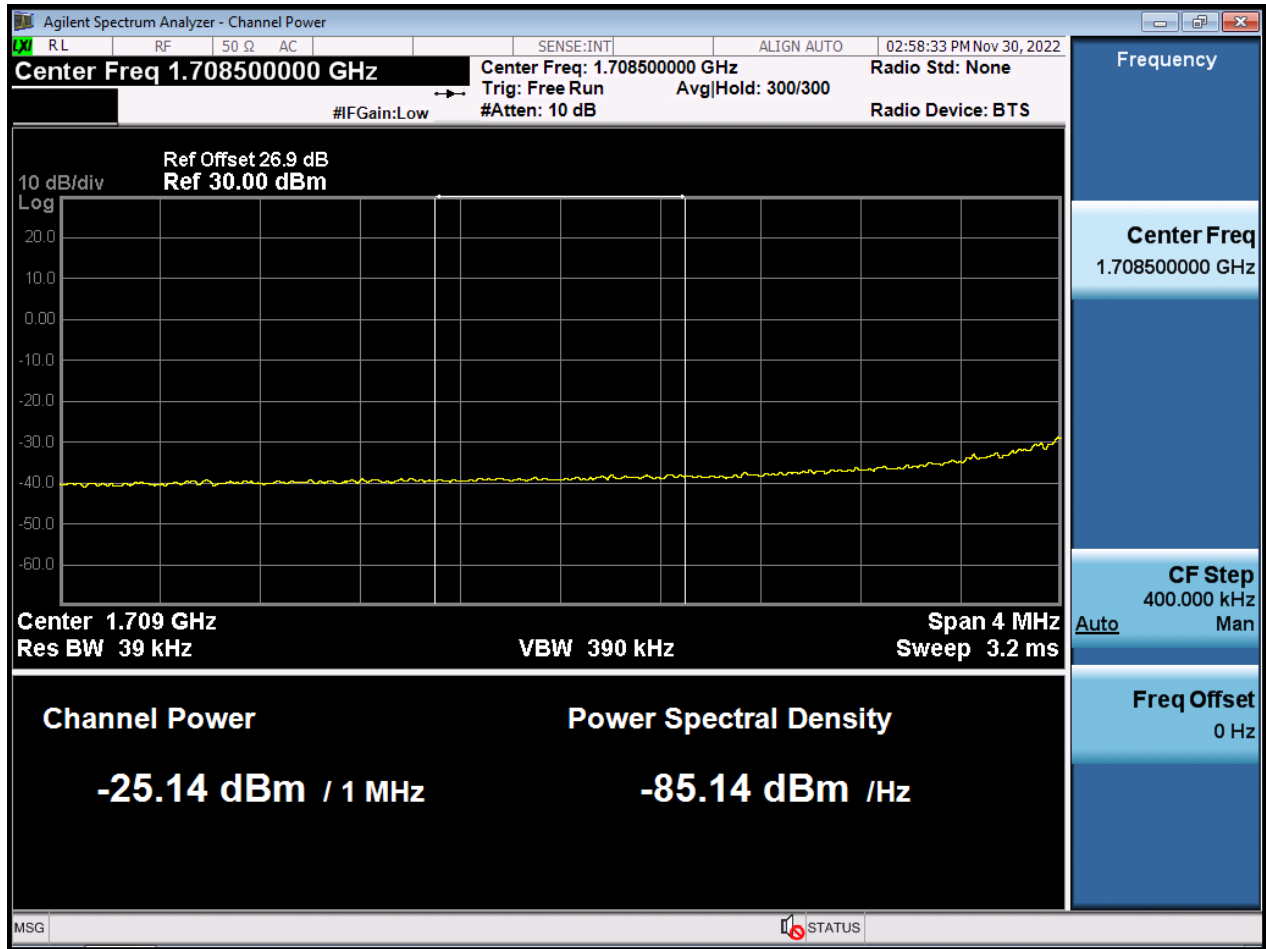


BW15M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW15M_BandEdge_Highest Channel_QPSK_FullRB(2)

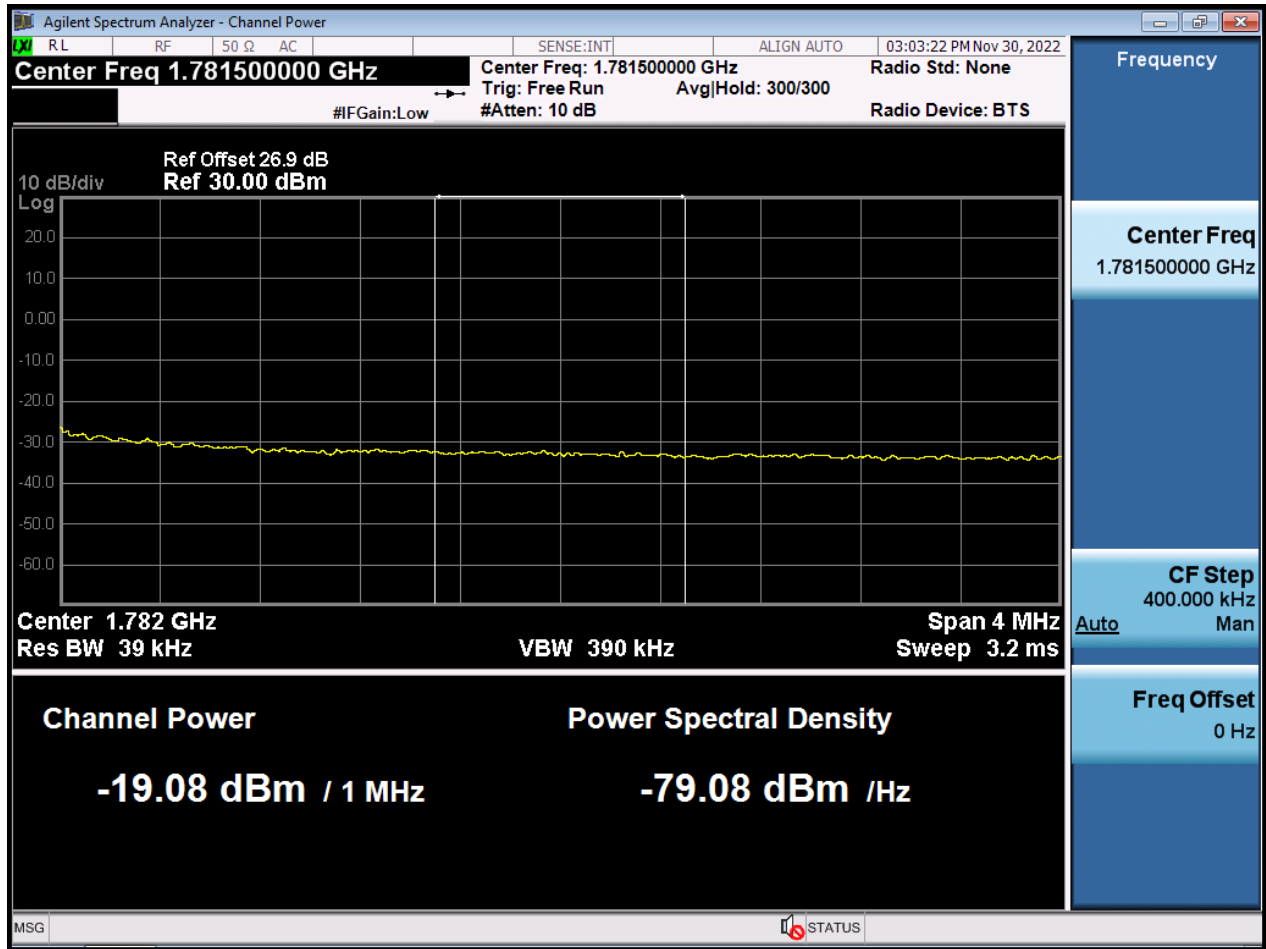


BW15M_BandEdge_Lowest Channel_QPSK_1RB

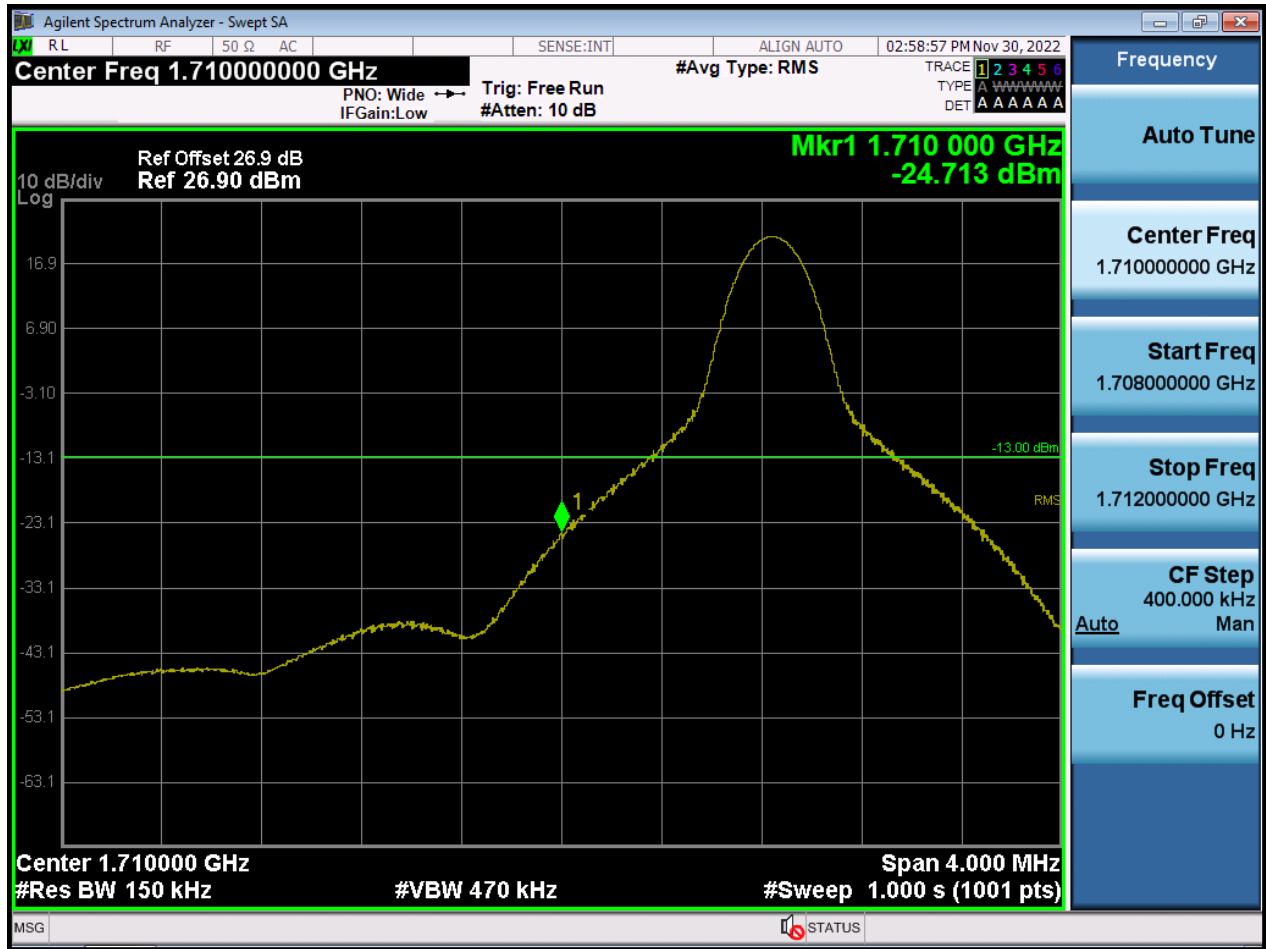

BW20M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW20M_BandEdge_Lowest Channel_QPSK_FullRB(2)

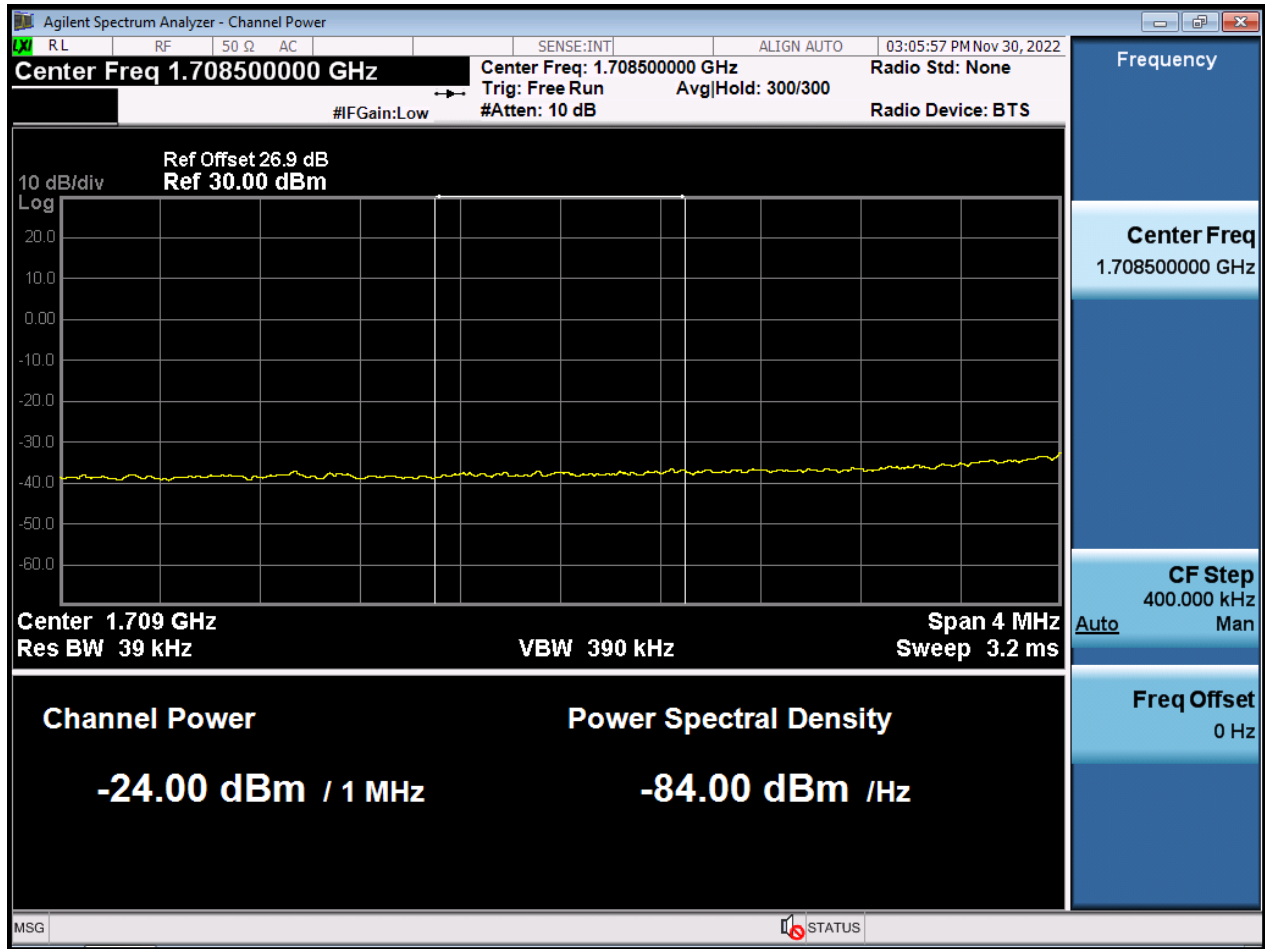

BW20M_BandEdge_Highest Channel_QPSK_FullIRB(1)



BW20M_BandEdge_Highest Channel_QPSK_FullRB(2)

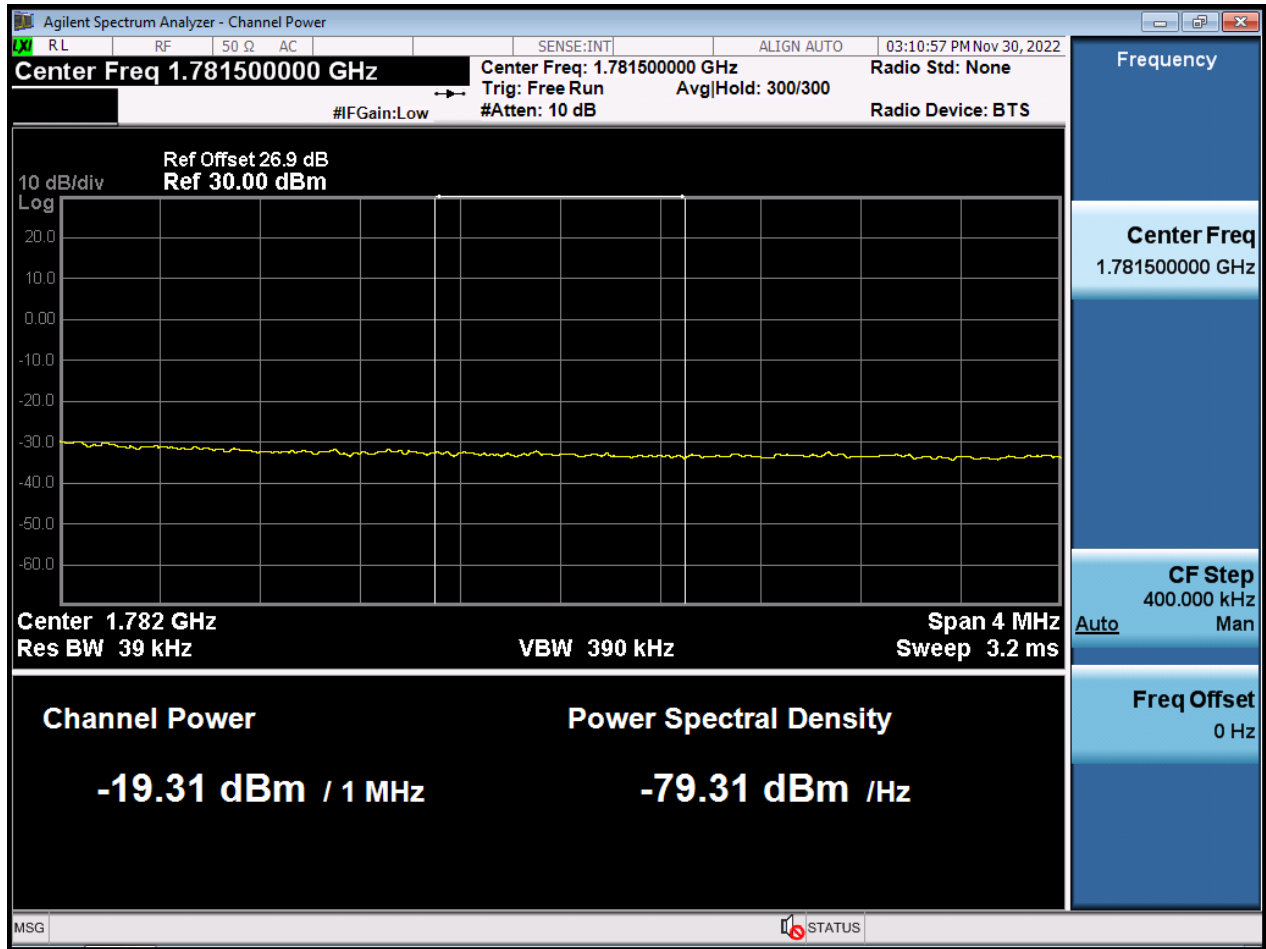


BW20M_BandEdge_Lowest Channel_QPSK_1RB




BW20M_BandEdge_Highest Channel_QPSK_1RB




BW1.4M_OBW_Middle Channel_QPSK_FullRB

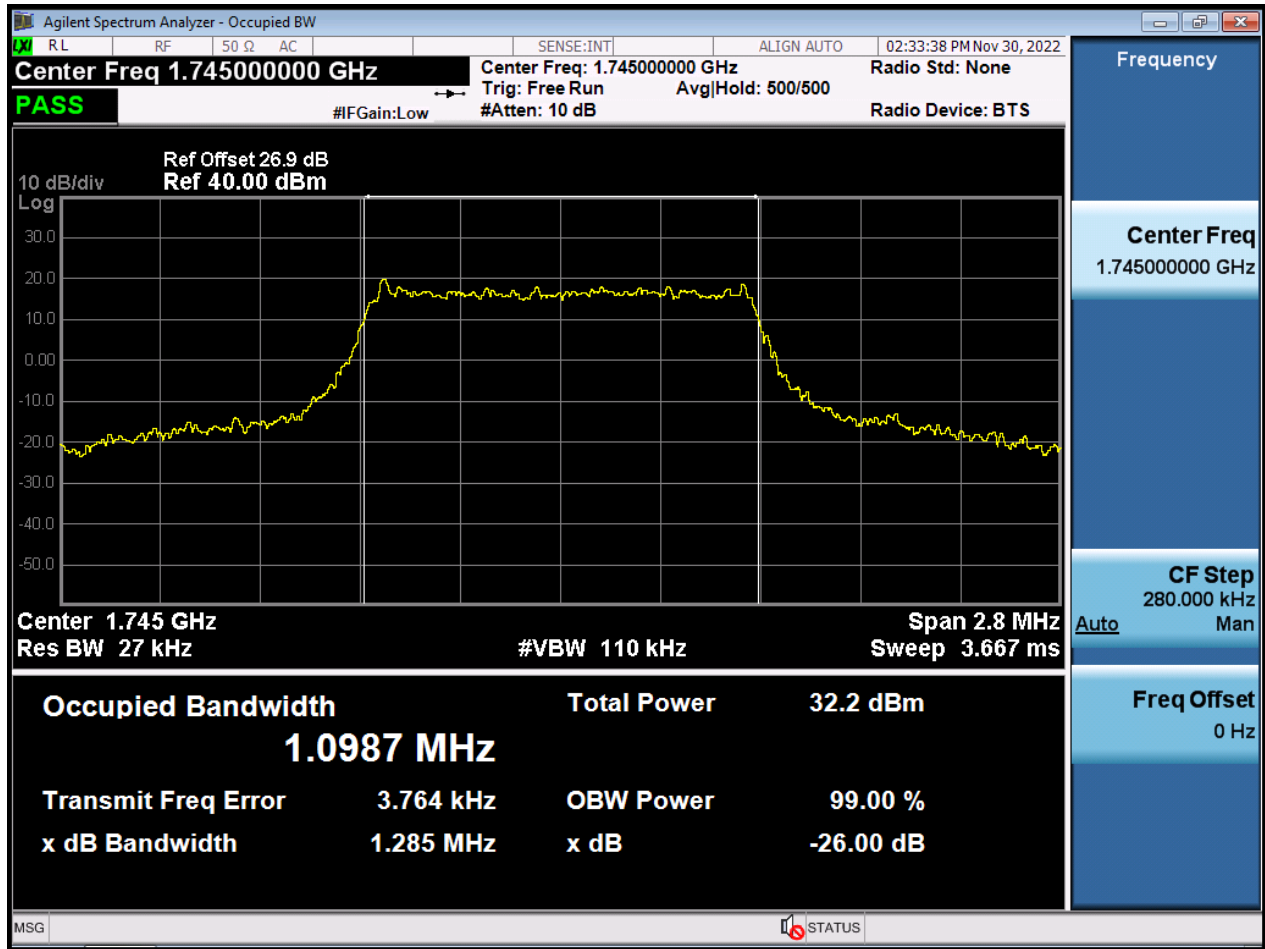


BW1.4M_OBW_Middle Channel_16QAM_FullIRB

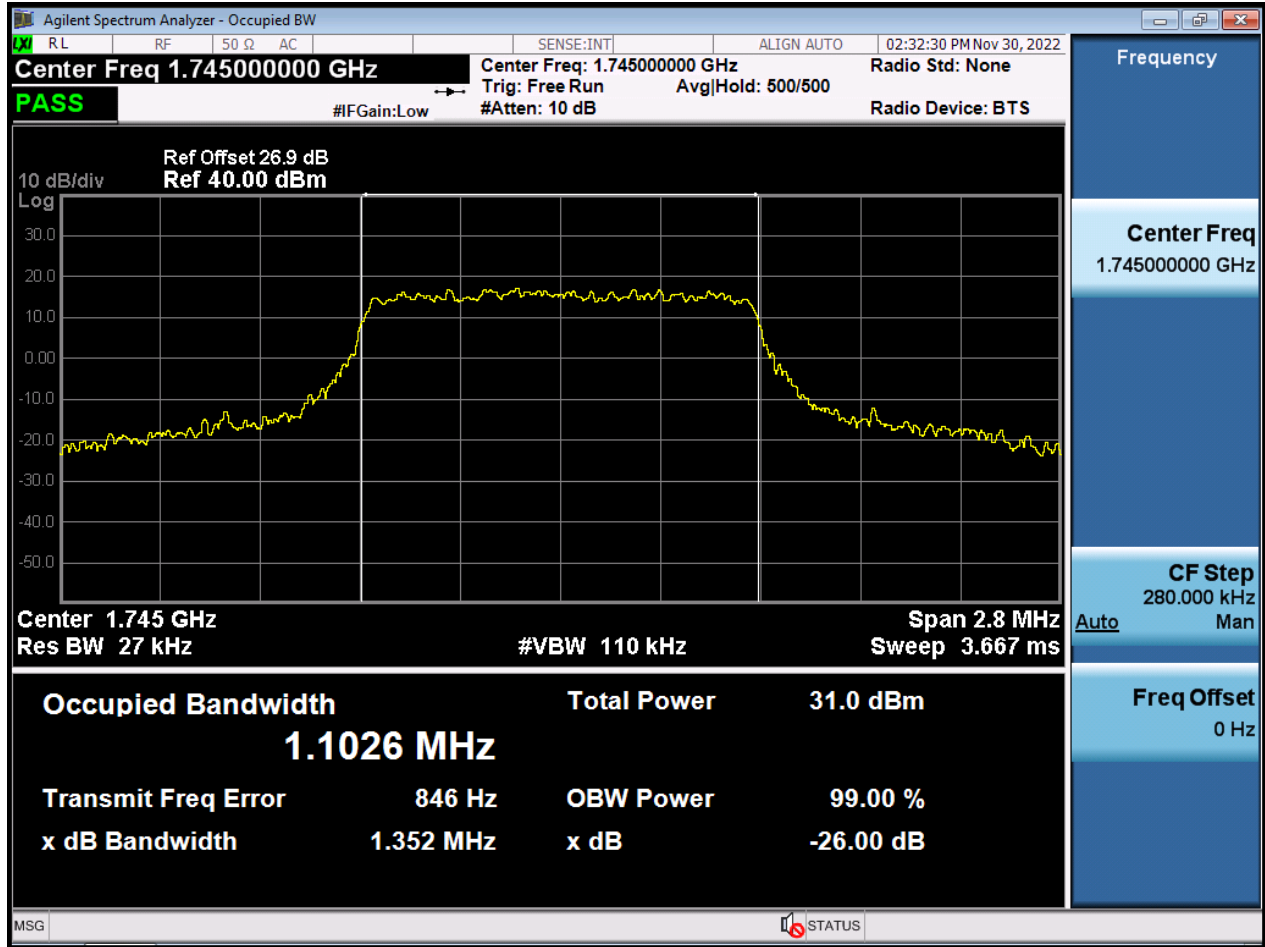


BW1.4M_OBW_Middle Channel_64QAM_FullIRB

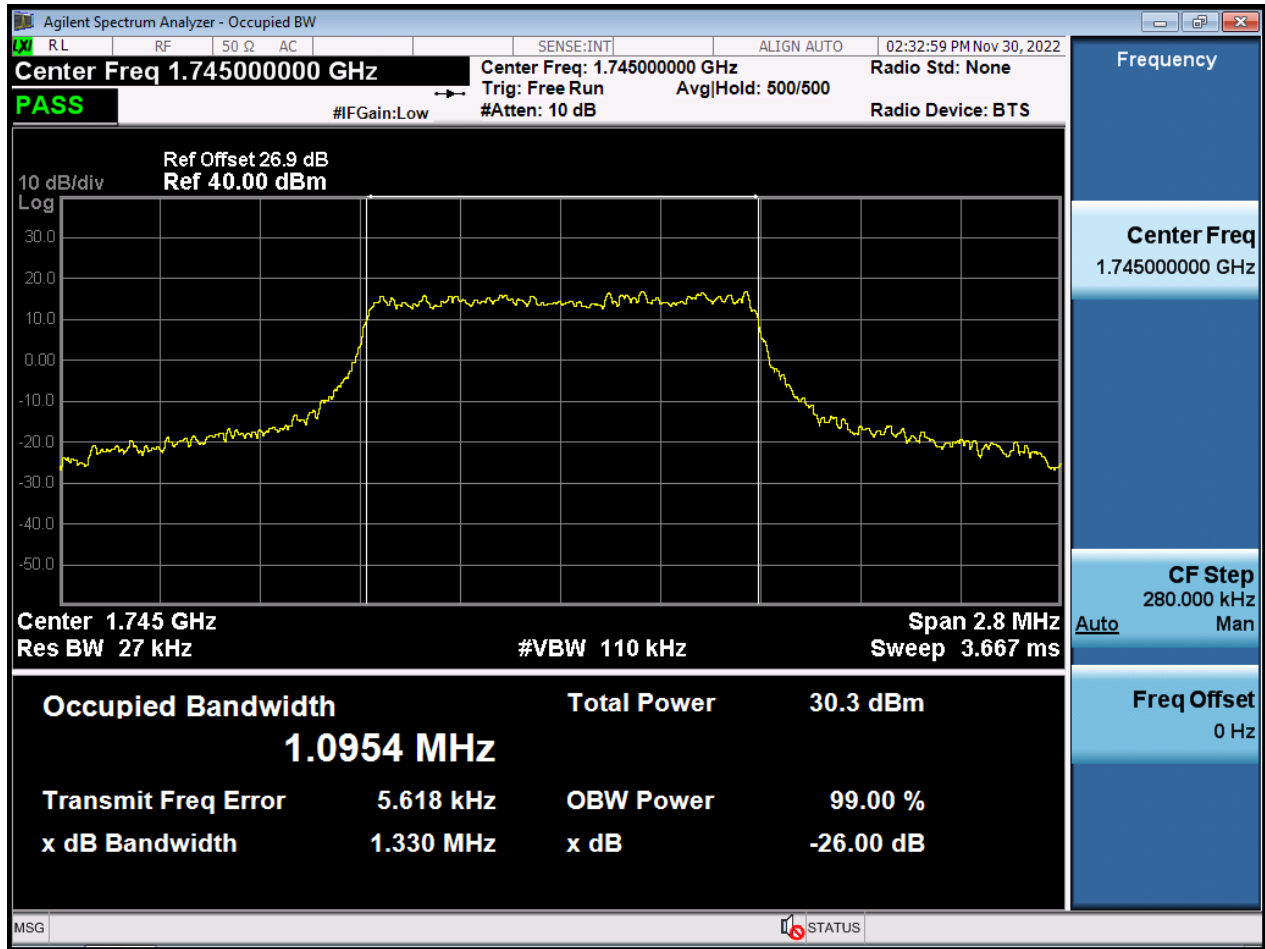


BW1.4M_OBW_Middle Channel_256QAM_FullIRB

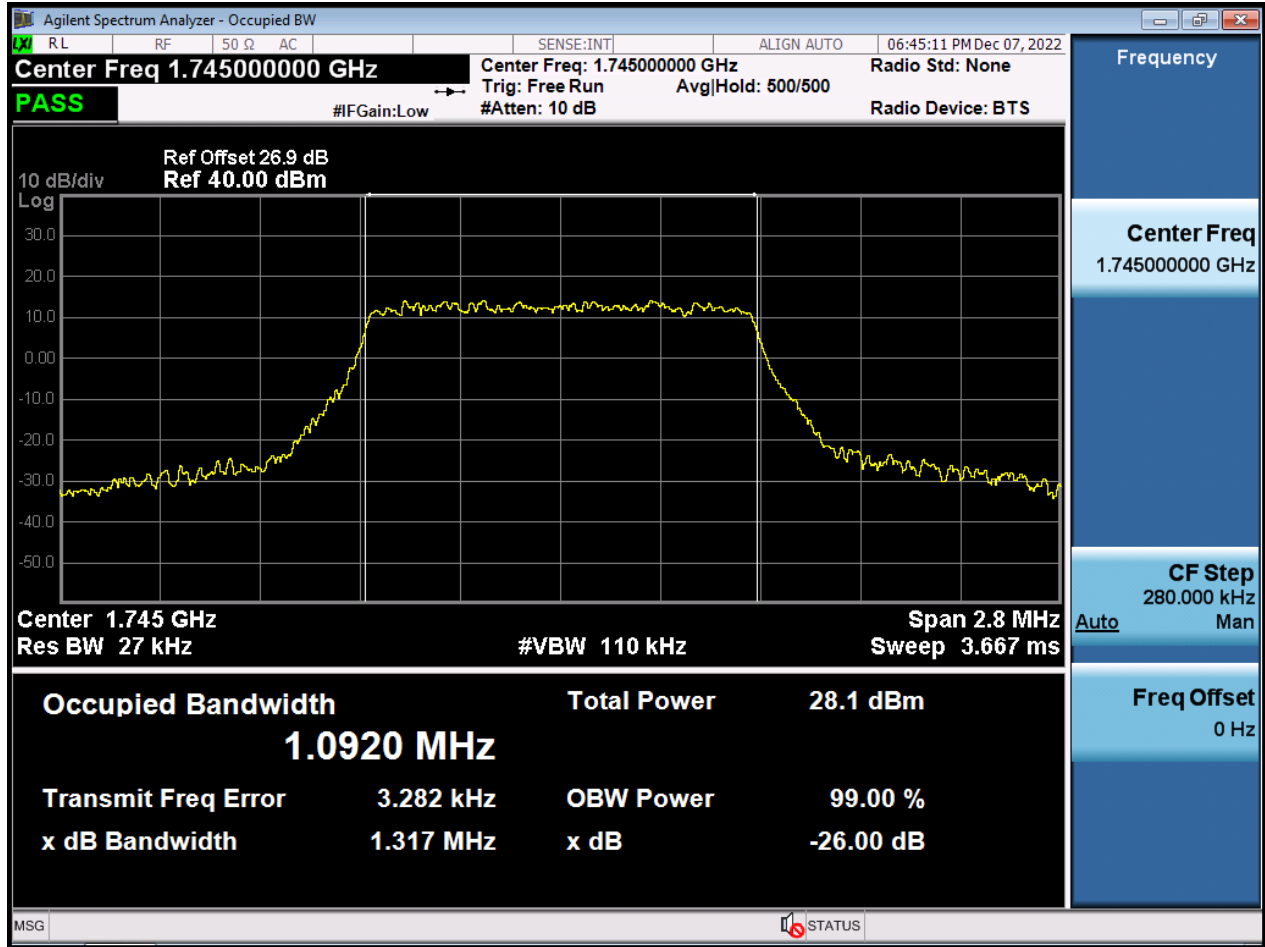


BW3M_OBW_Middle Channel_QPSK_FullIRB

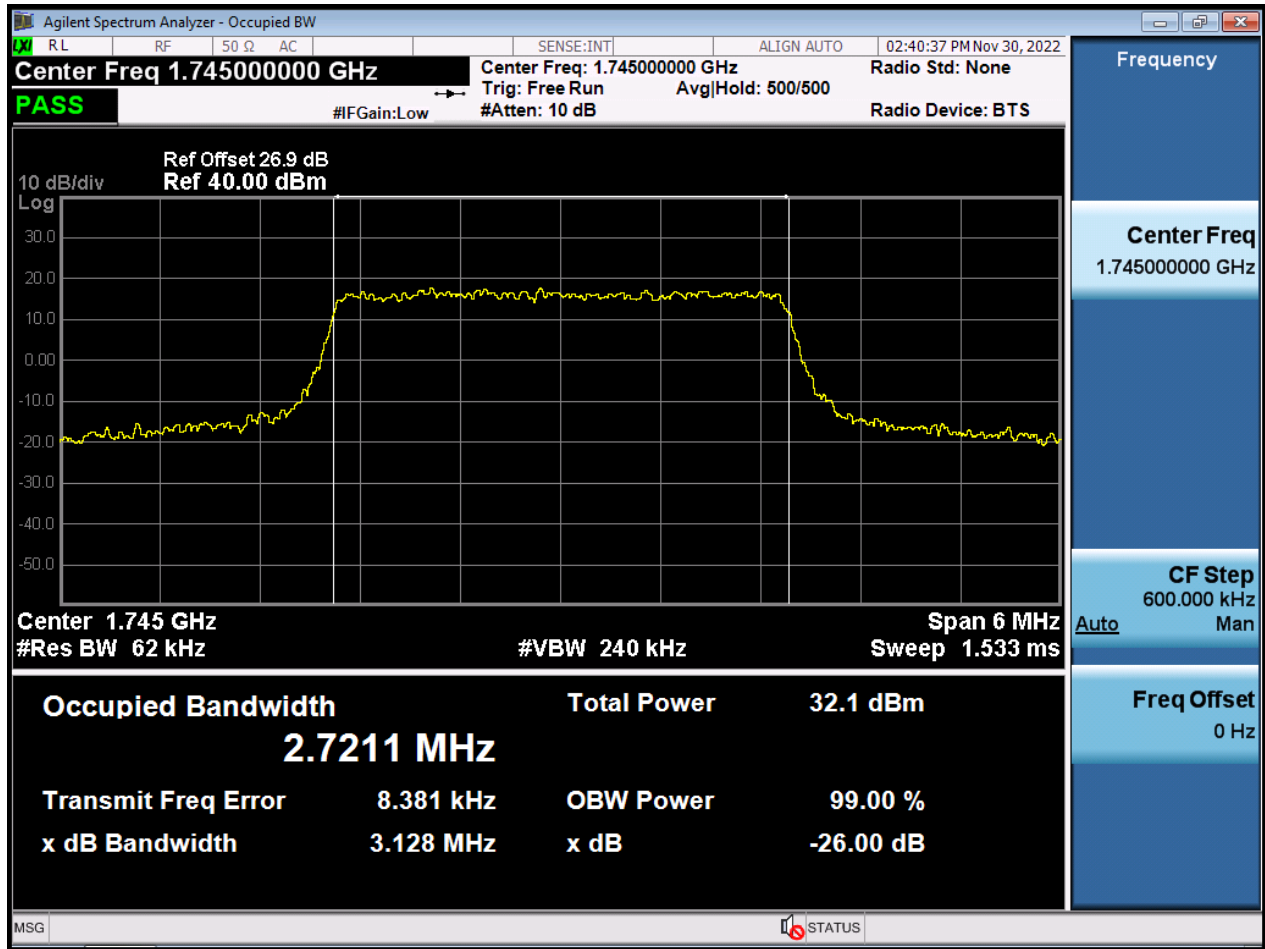


BW3M_OBW_Middle Channel_16QAM_FullRB

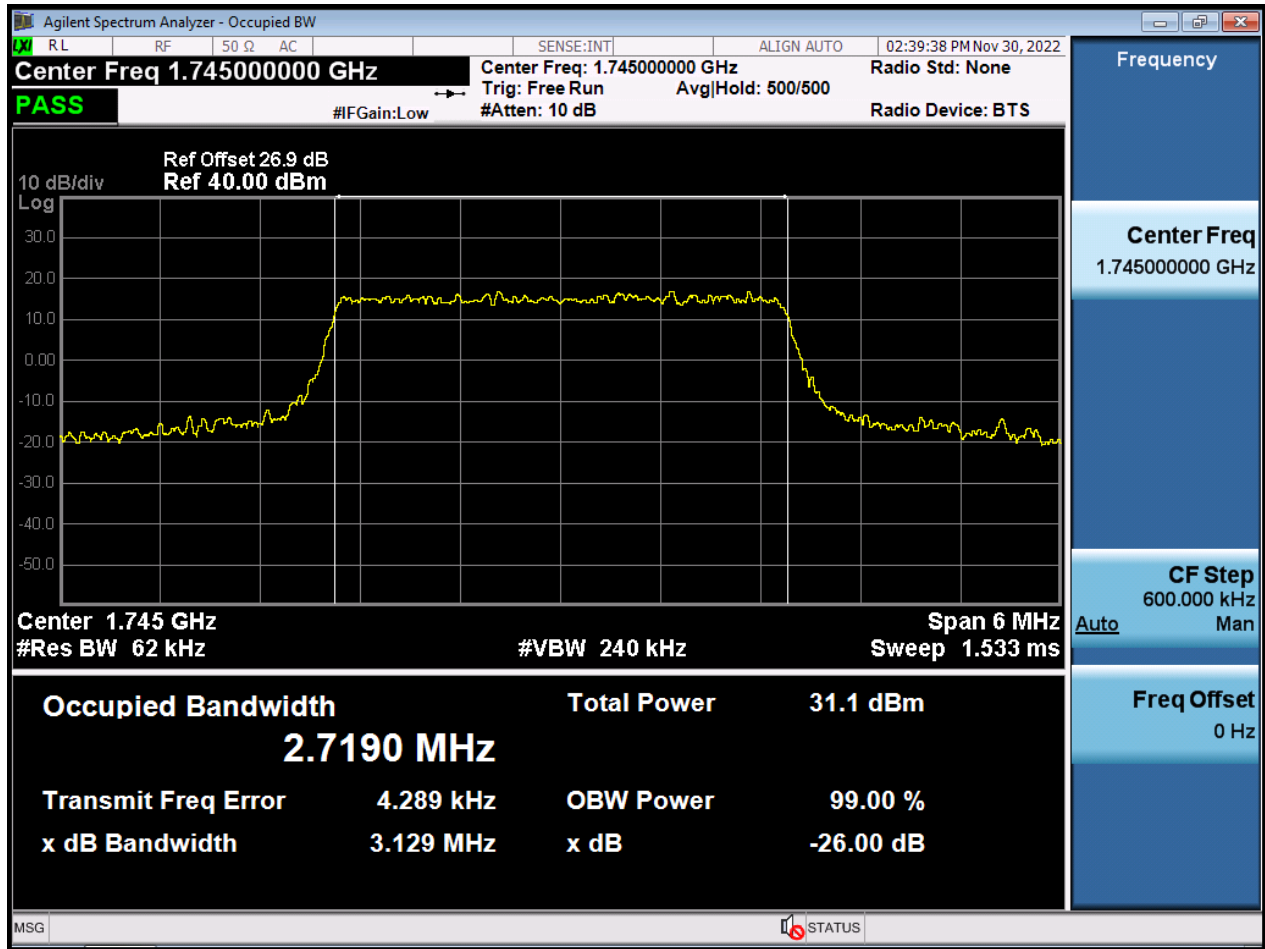


BW3M_OBW_Middle Channel_64QAM_FullRB

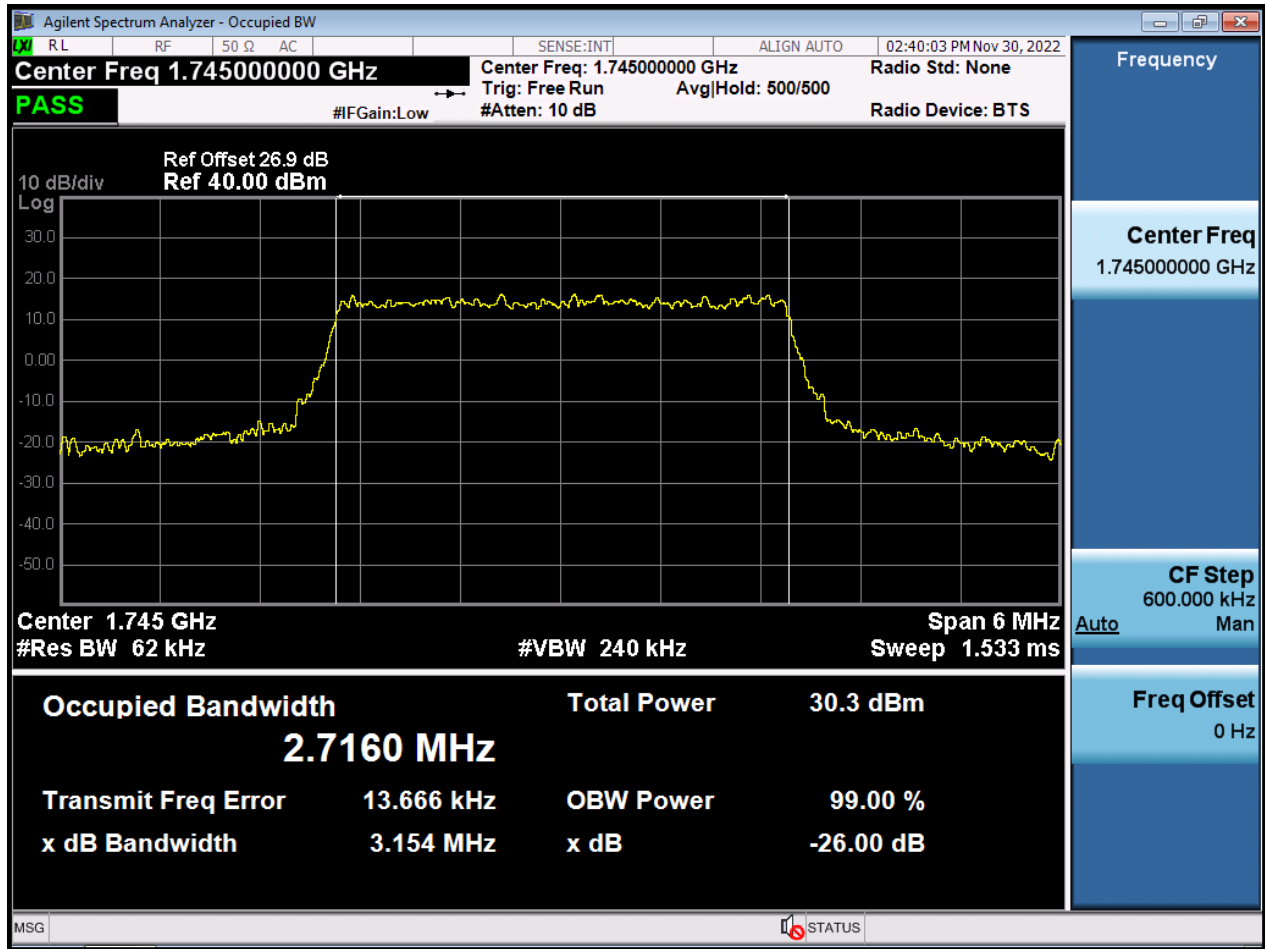


BW3M_OBW_Middle Channel_256QAM_FullIRB

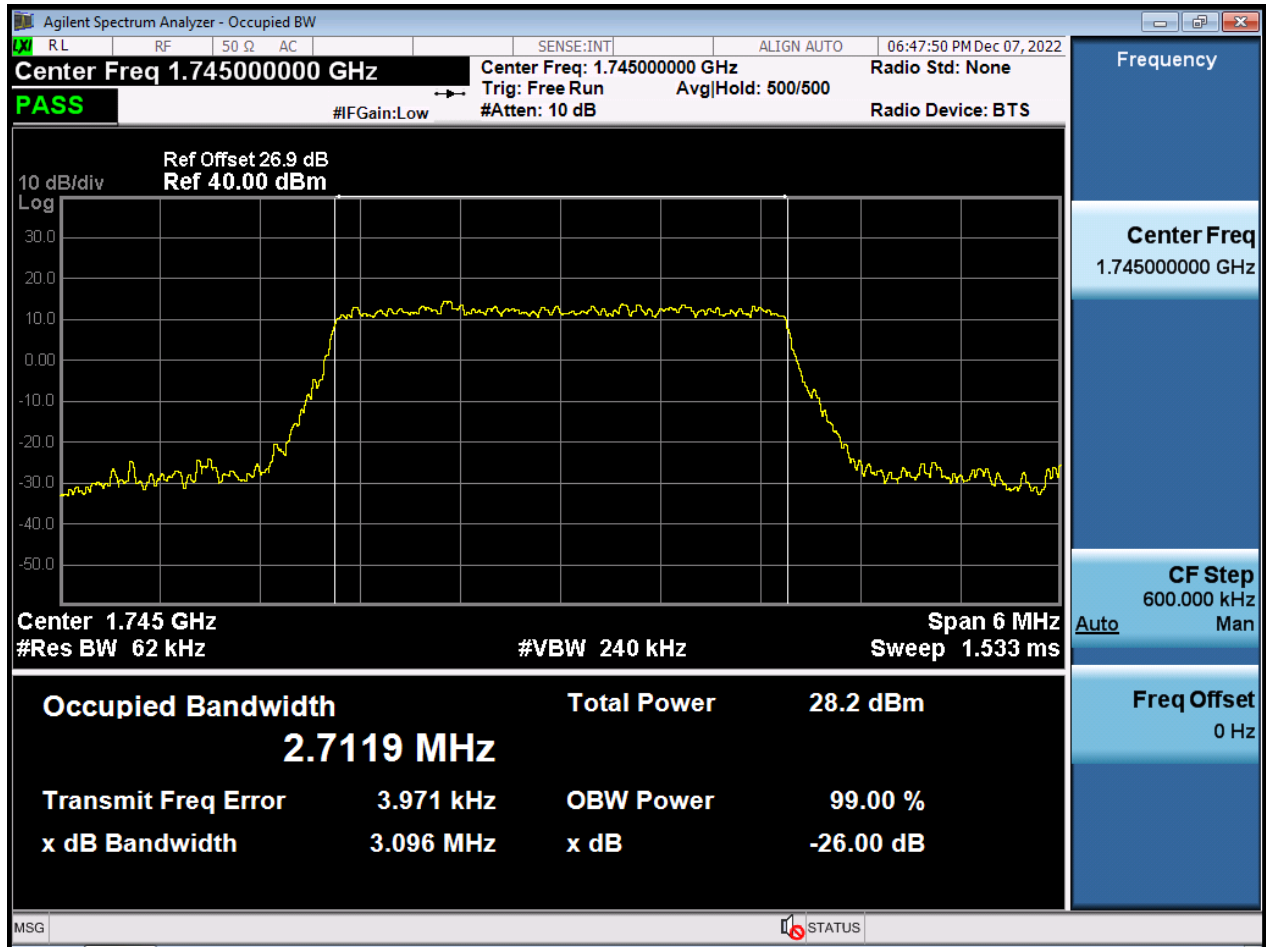


BW5M_OBW_Middle Channel_QPSK_FullIRB

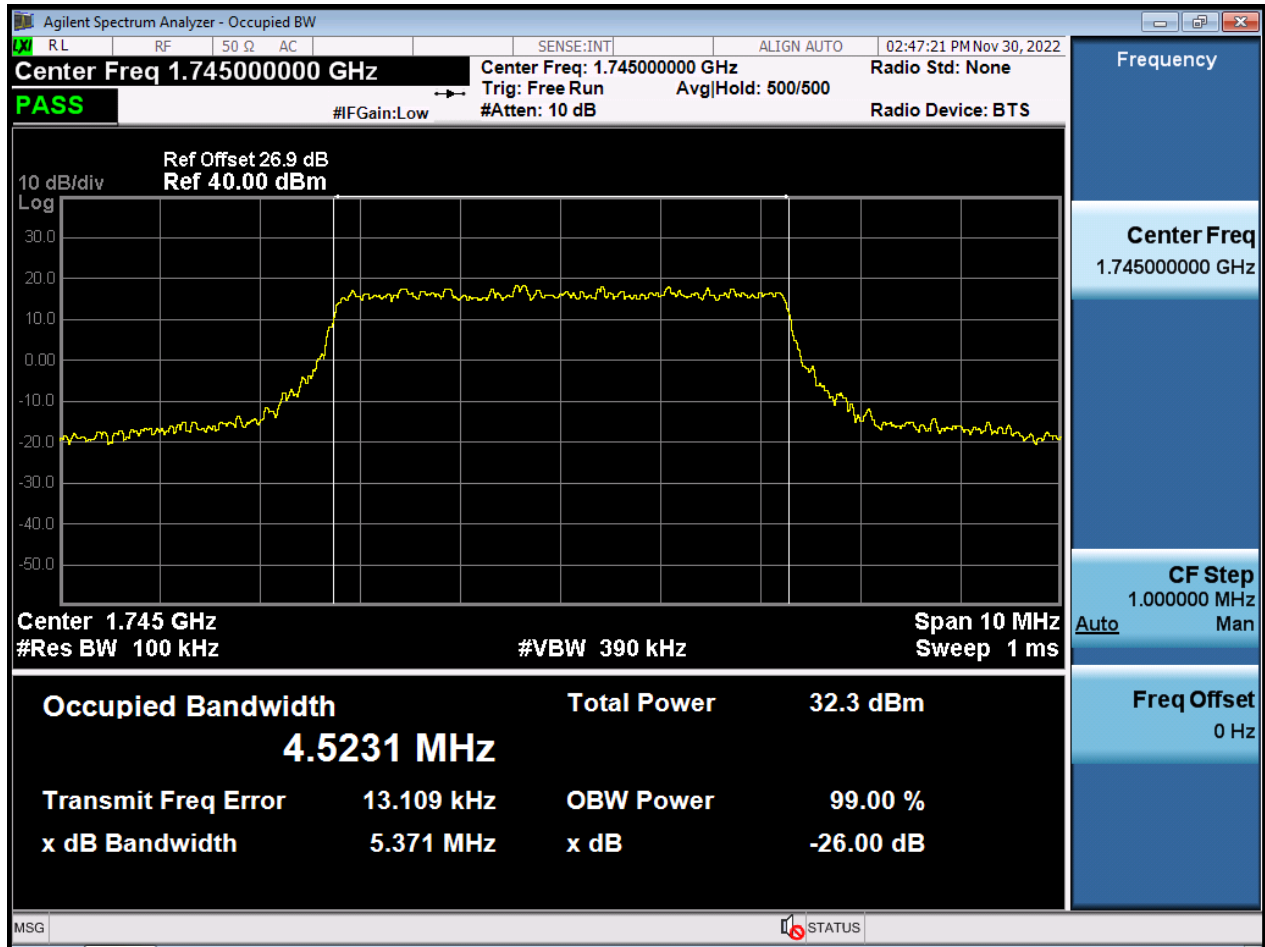


BW5M_OBW_Middle Channel_16QAM_FullRB

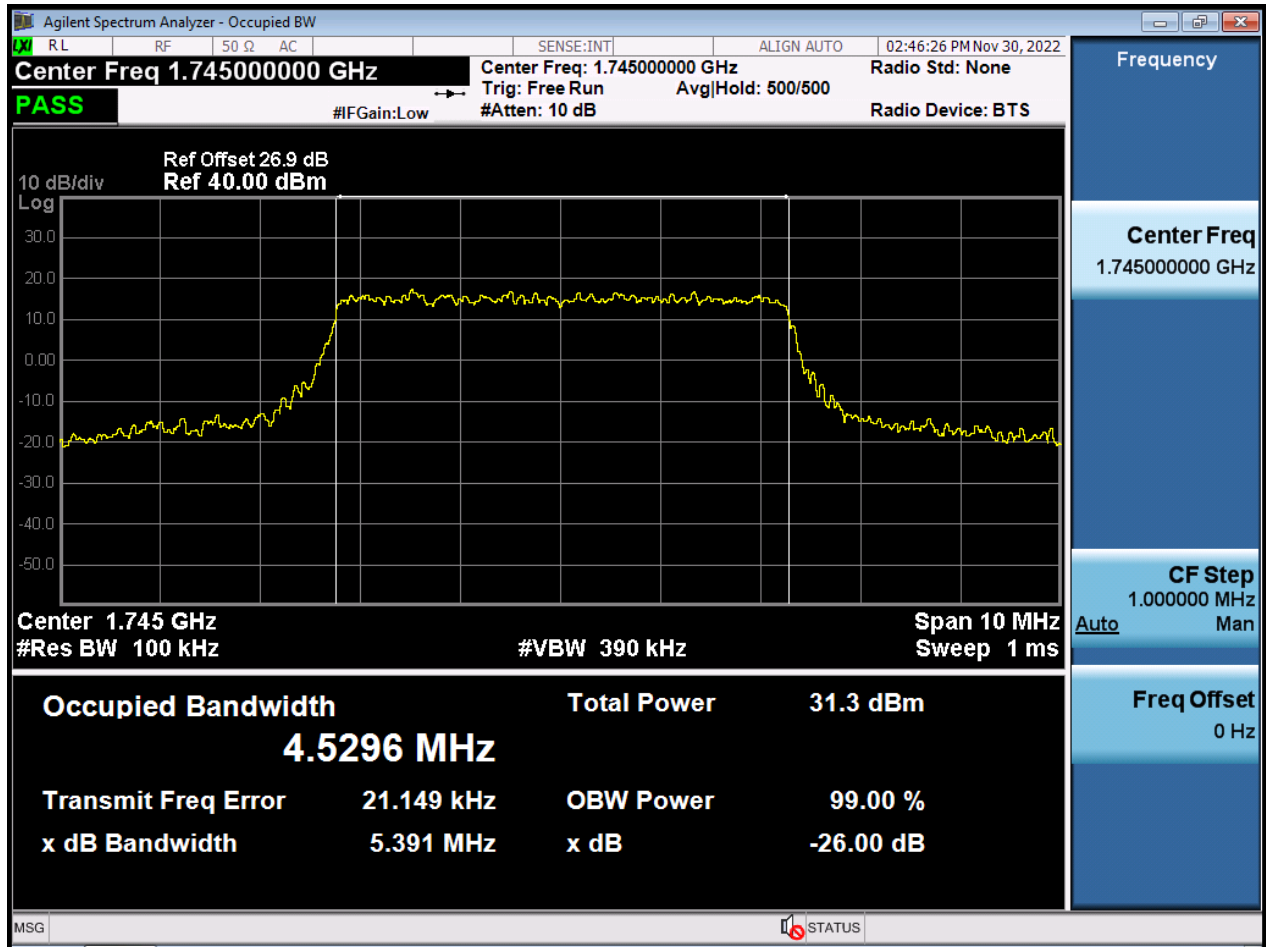


BW5M_OBW_Middle Channel_64QAM_FullRB

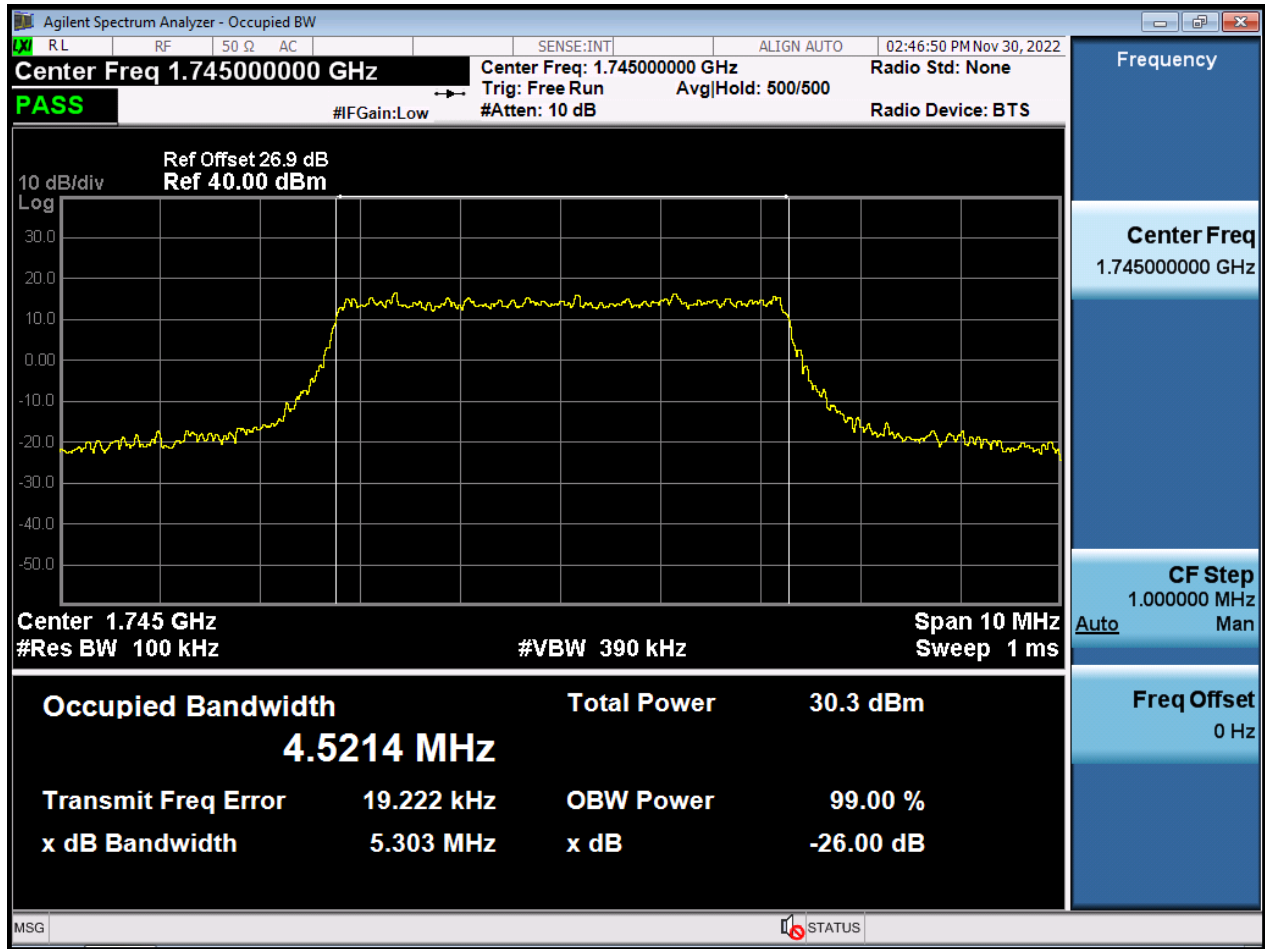


BW5M_OBW_Middle Channel_256QAM_FullIRB

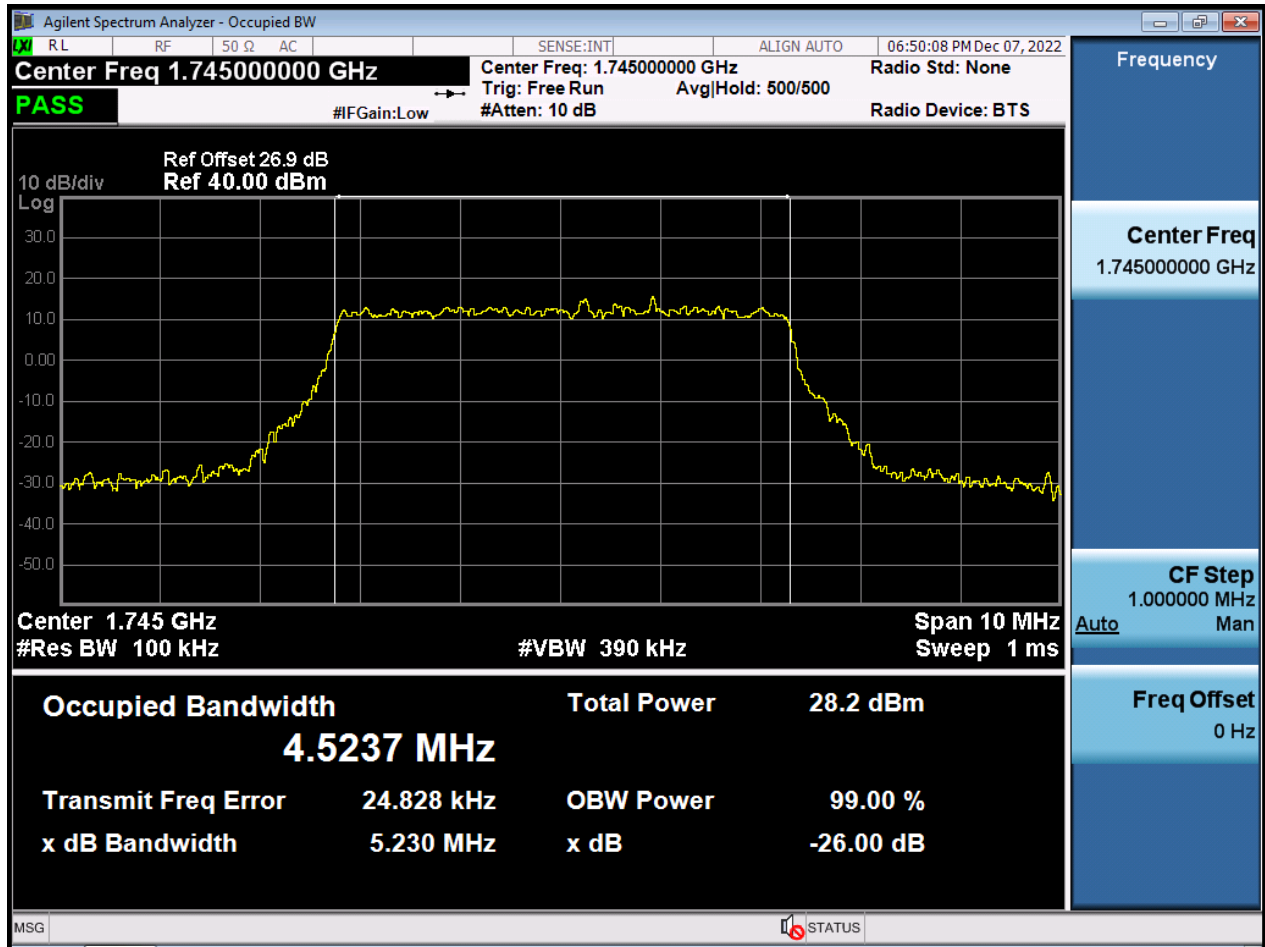


BW10M_OBW_Middle Channel_QPSK_FullRB

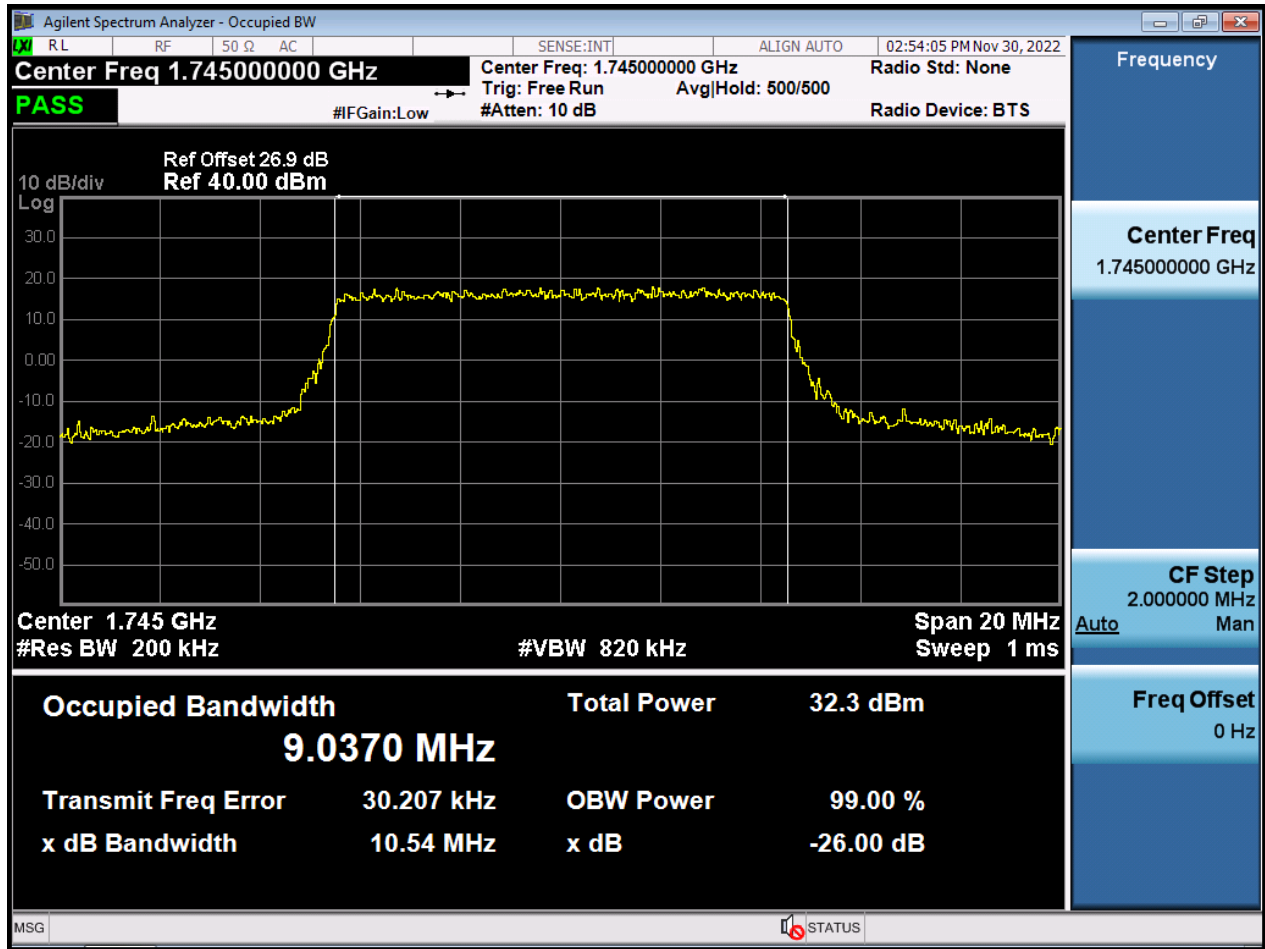


BW10M_OBW_Middle Channel_16QAM_FullIRB

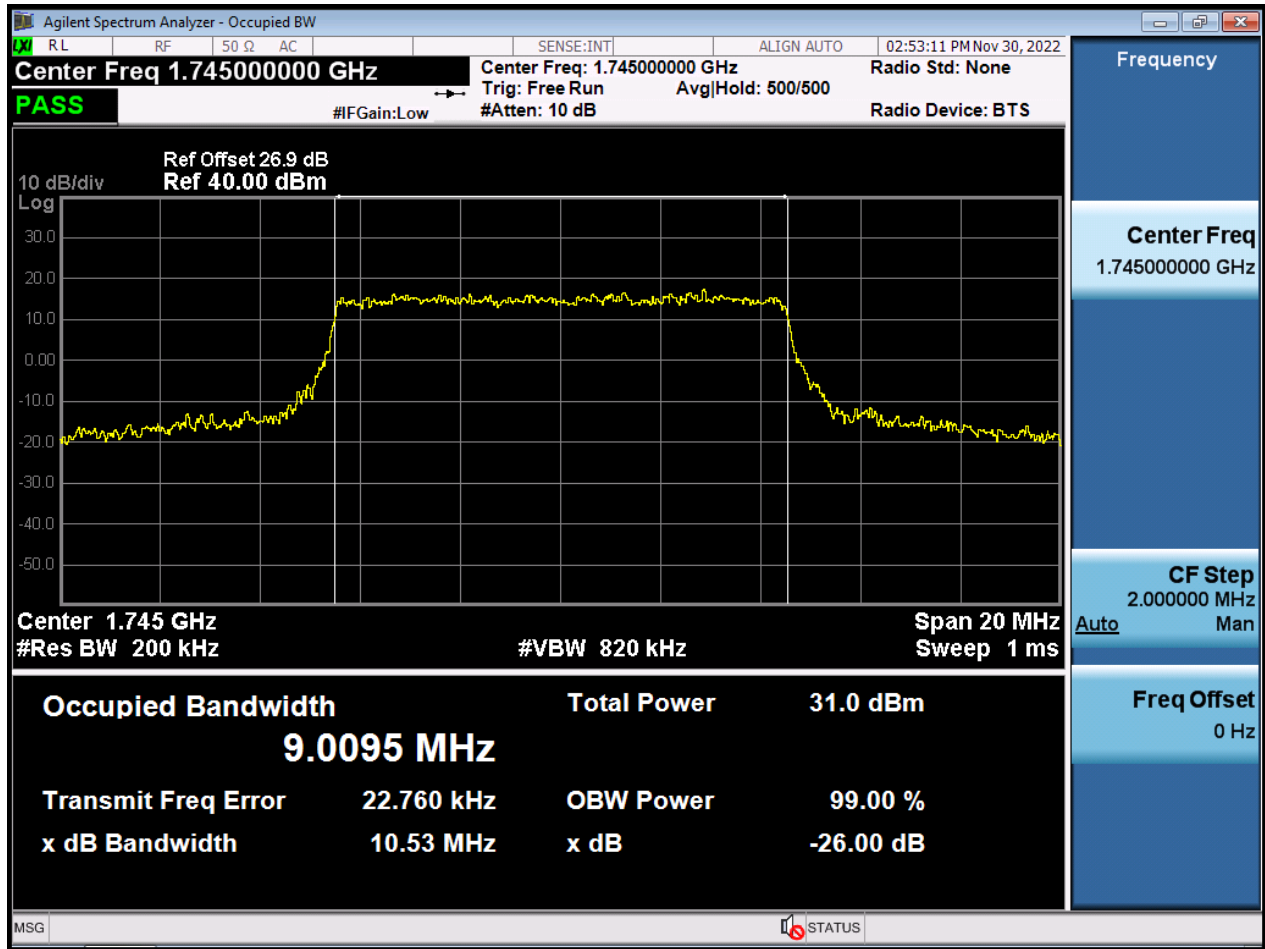


BW10M_OBW_Middle Channel_64QAM_FullIRB

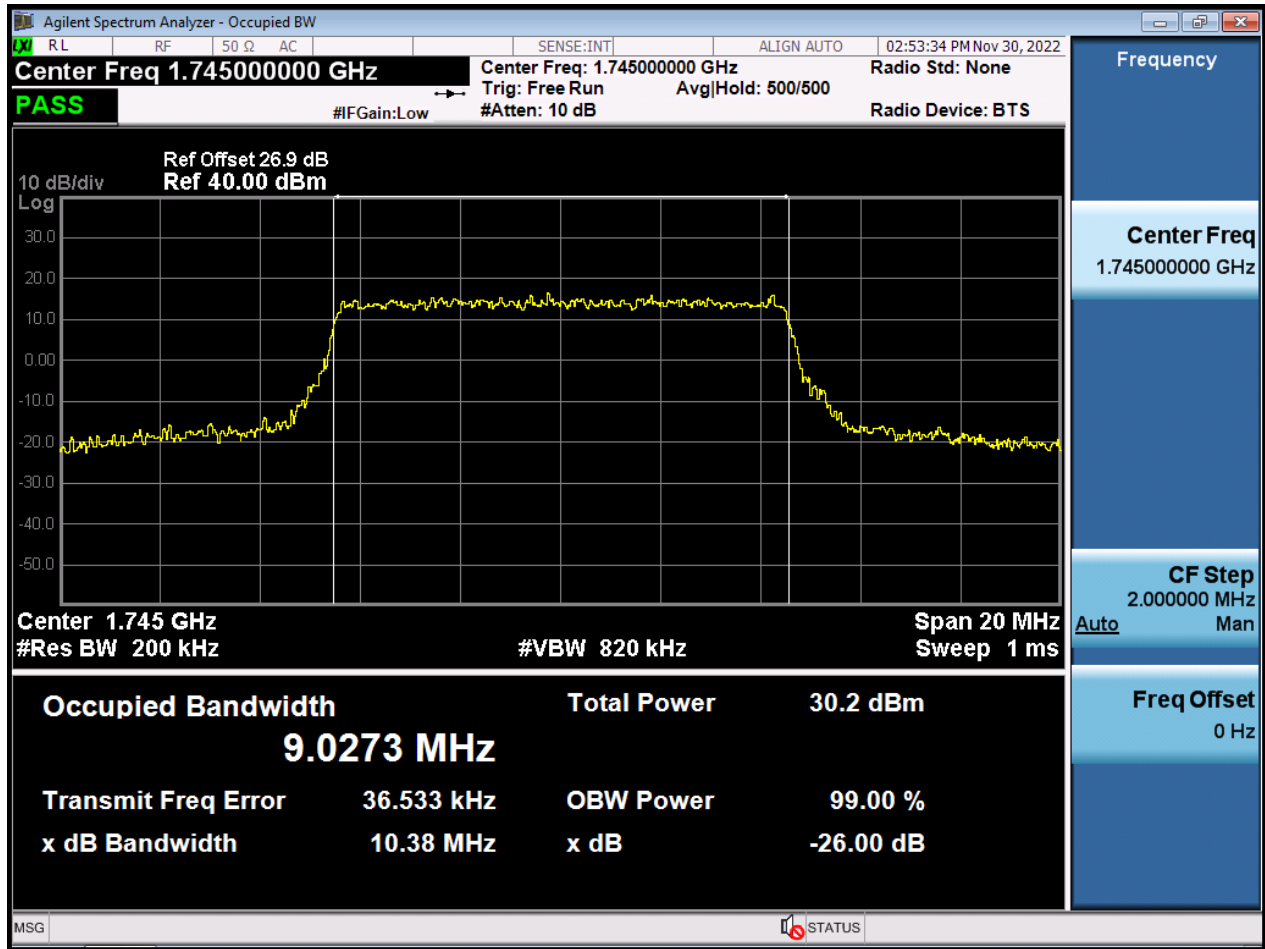


BW10M_OBW_Middle Channel_256QAM_FullRB

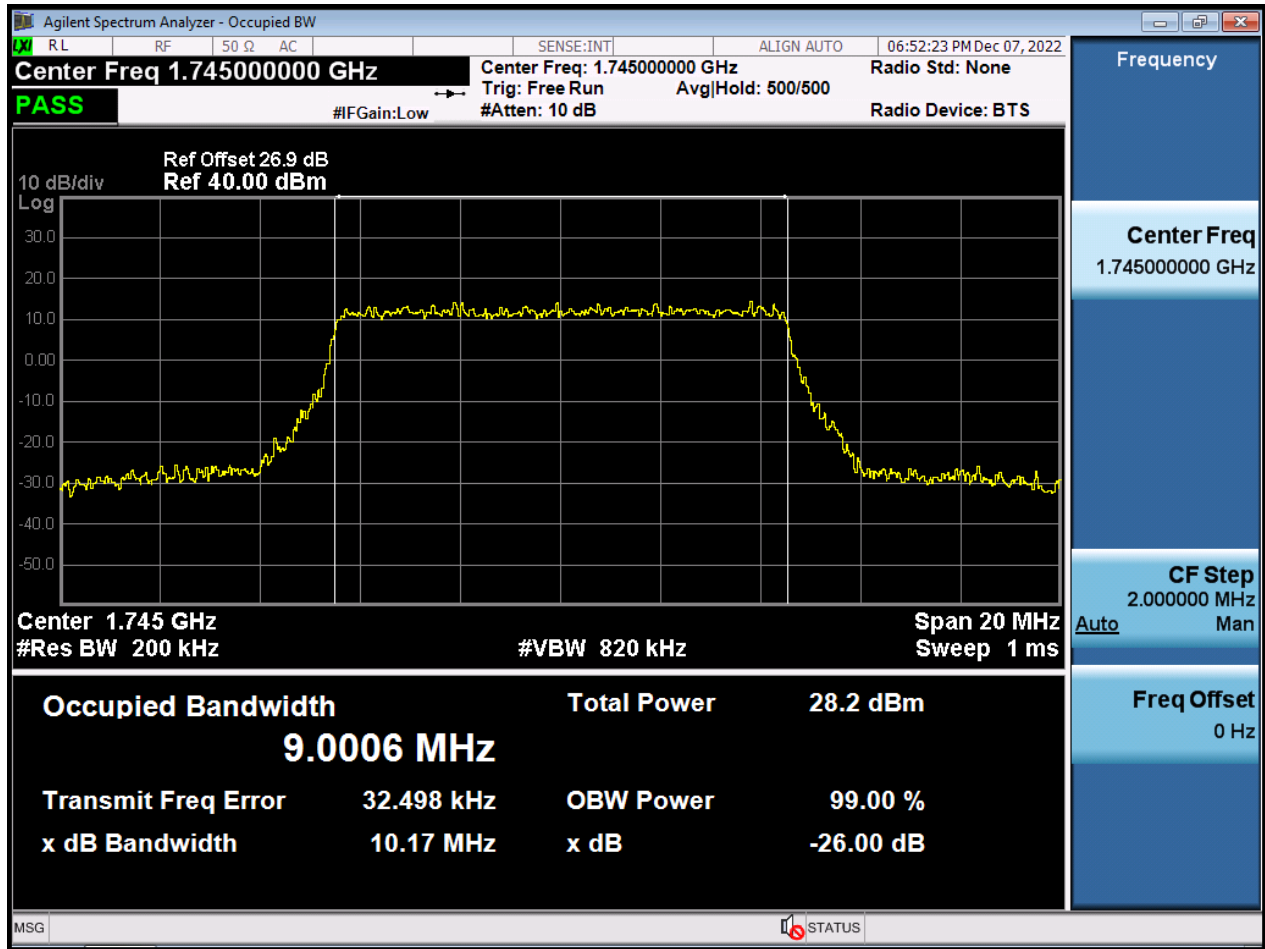


BW15M_OBW_Middle Channel_QPSK_FullRB

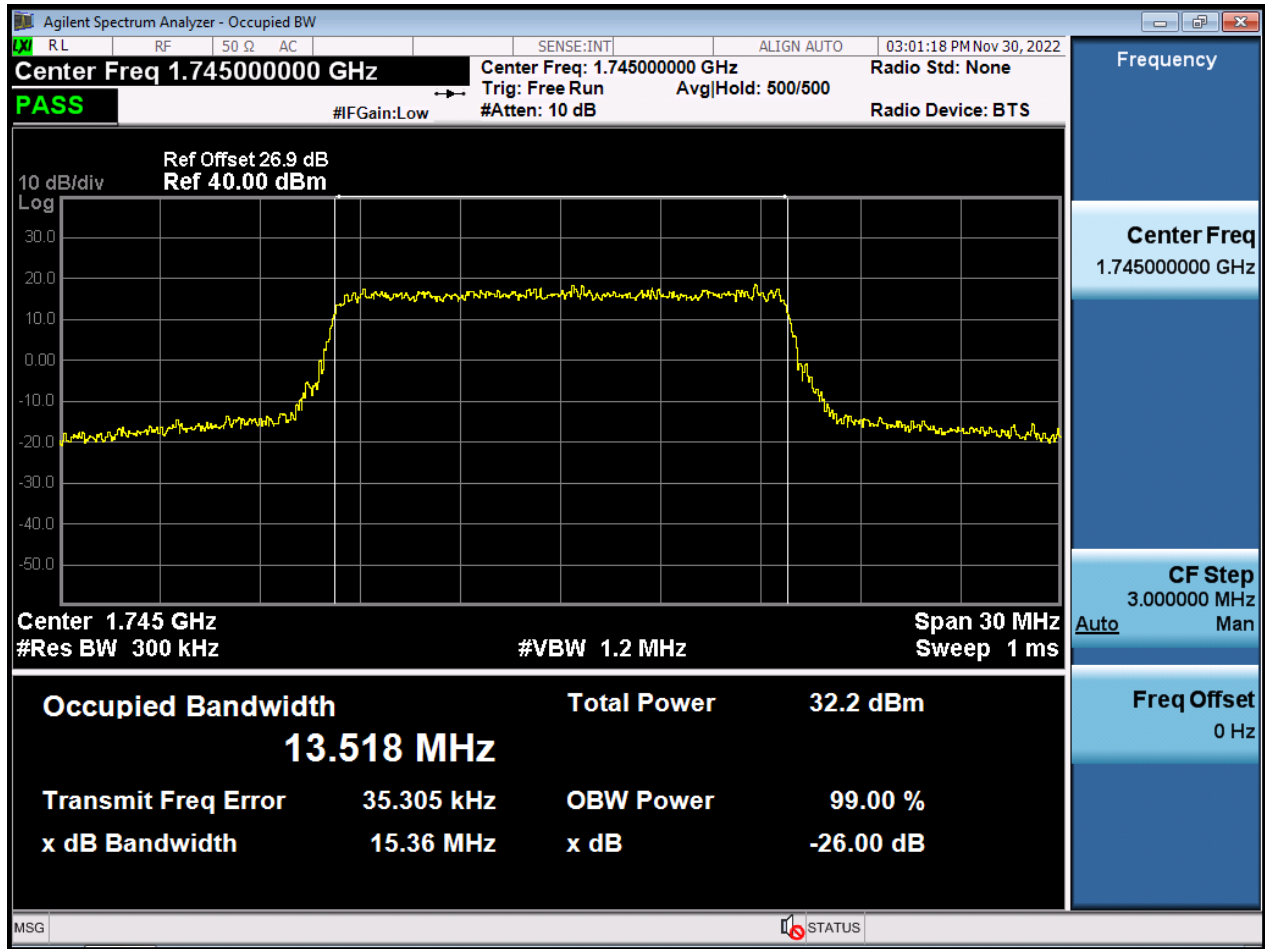


BW15M_OBW_Middle Channel_16QAM_FullIRB

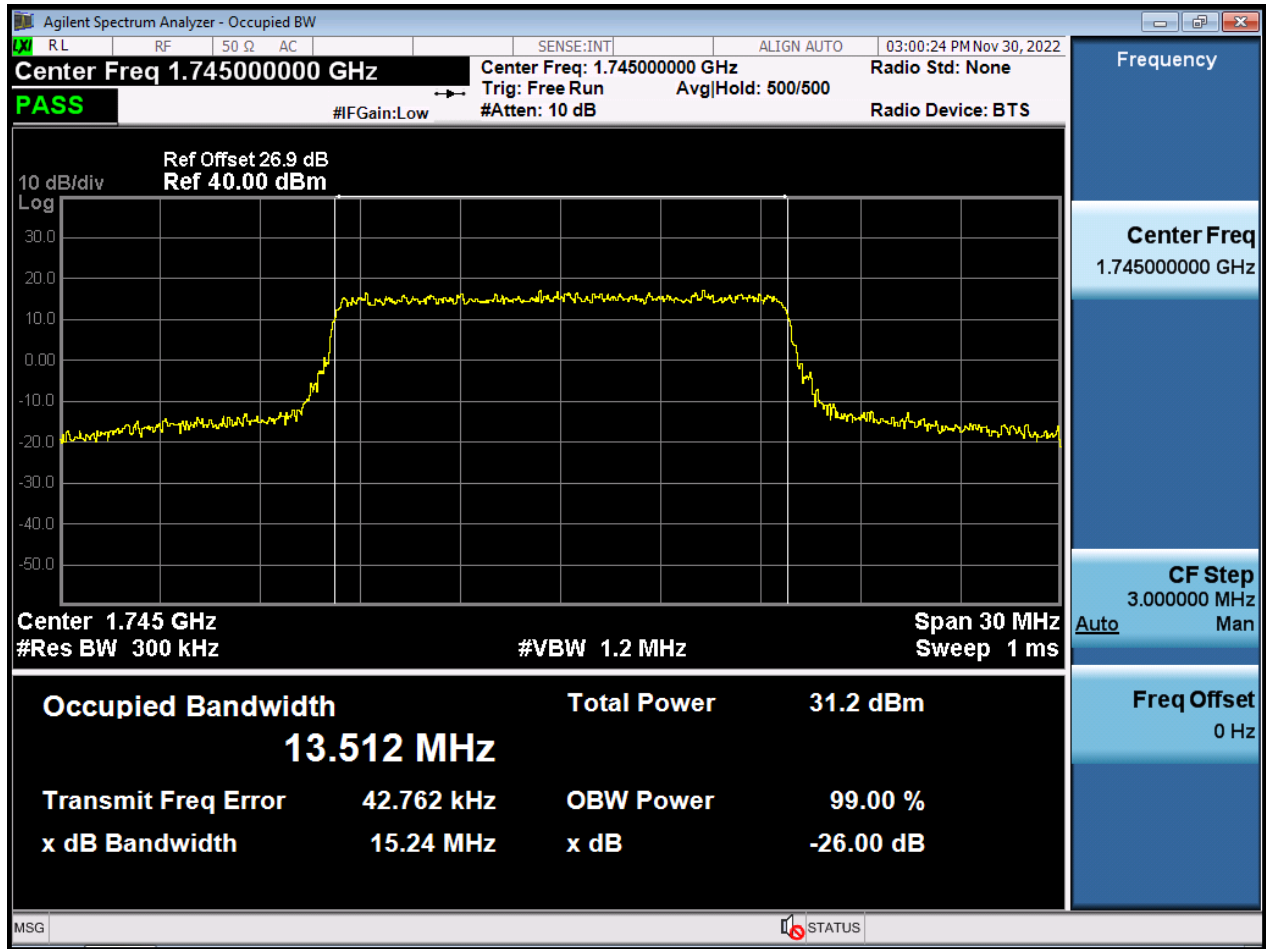


BW15M_OBW_Middle Channel_64QAM_FullIRB

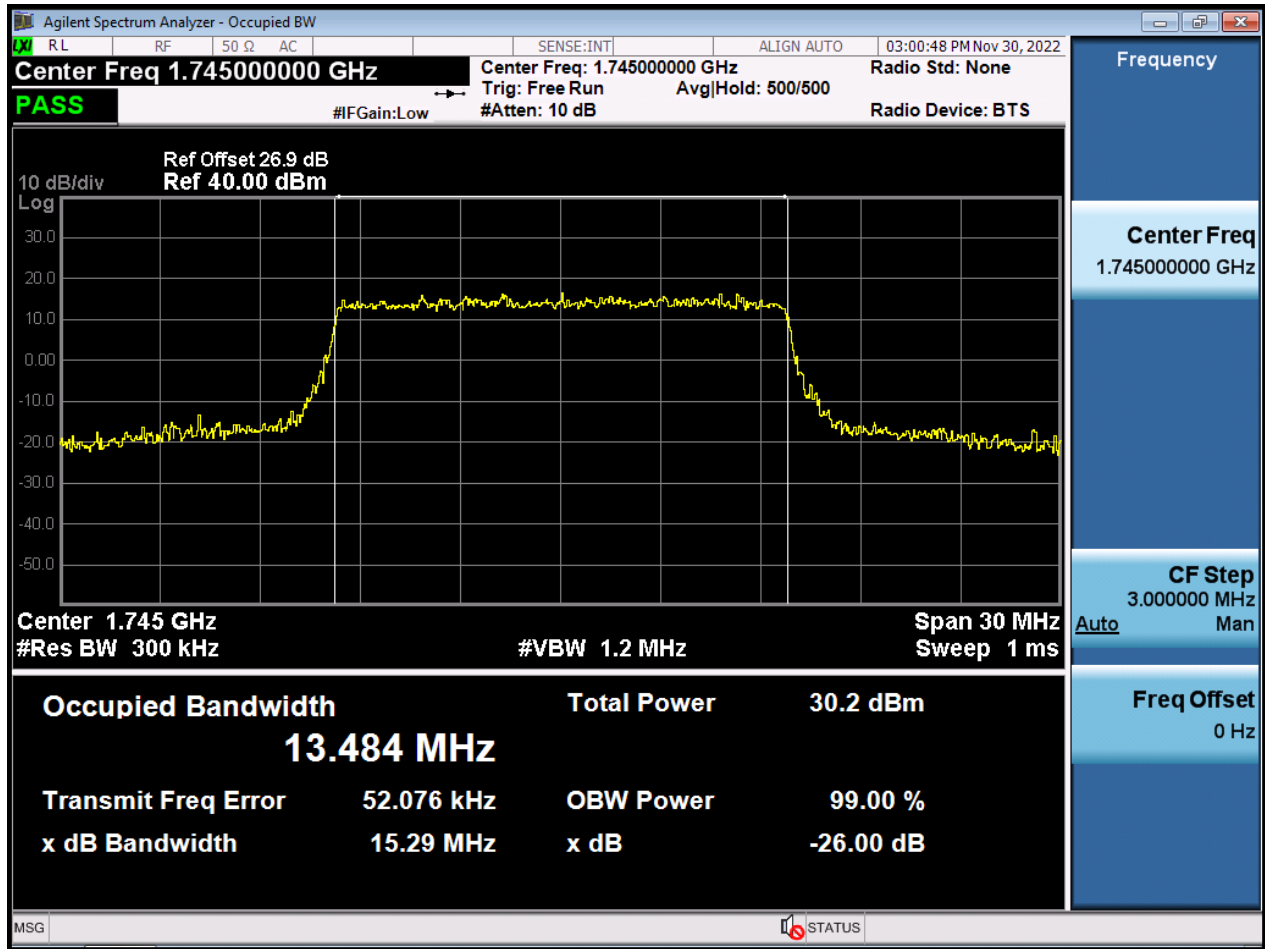


BW15M_OBW_Middle Channel_256QAM_FullRB

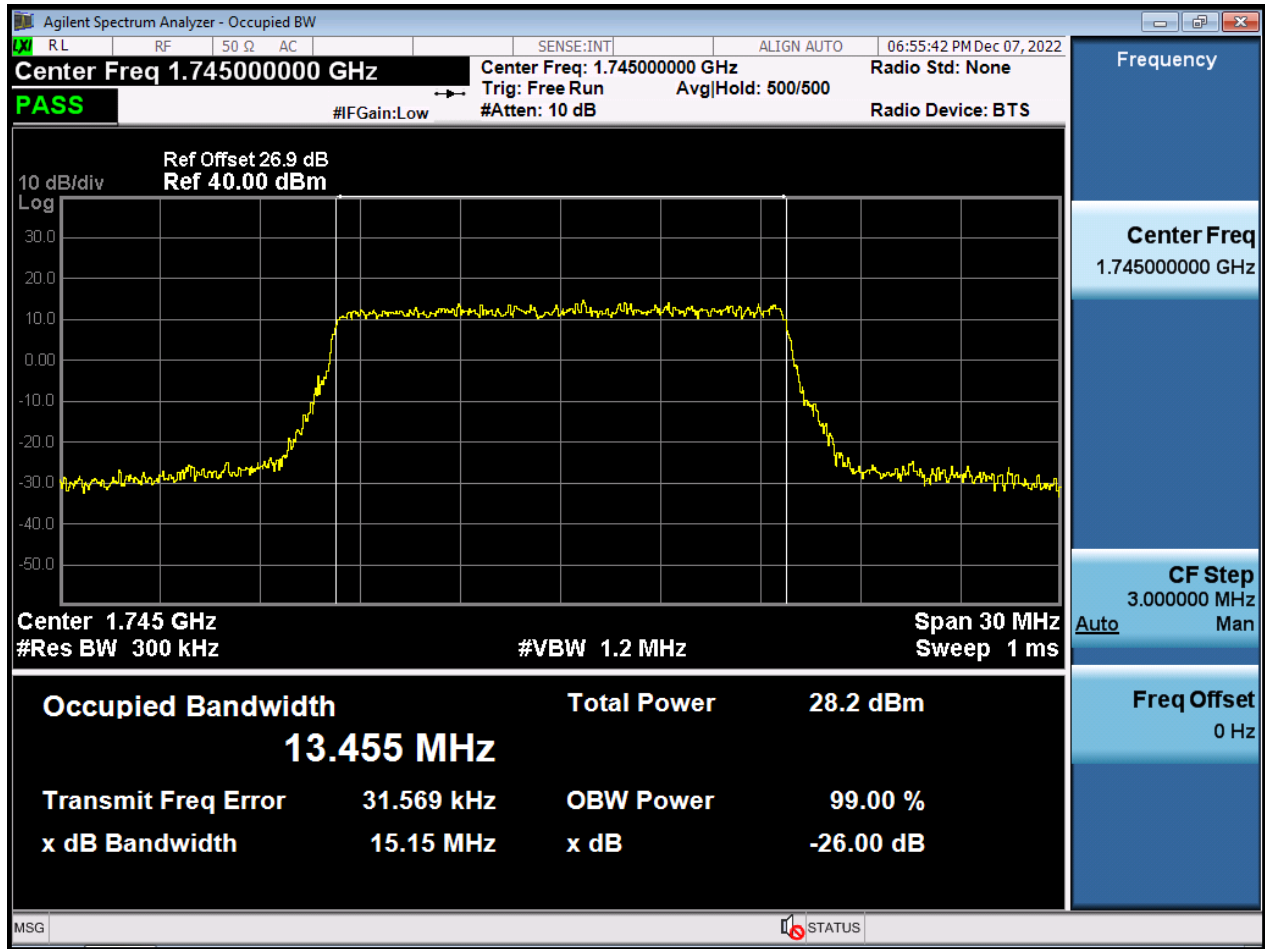


BW20M_OBW_Middle Channel_QPSK_FullRB

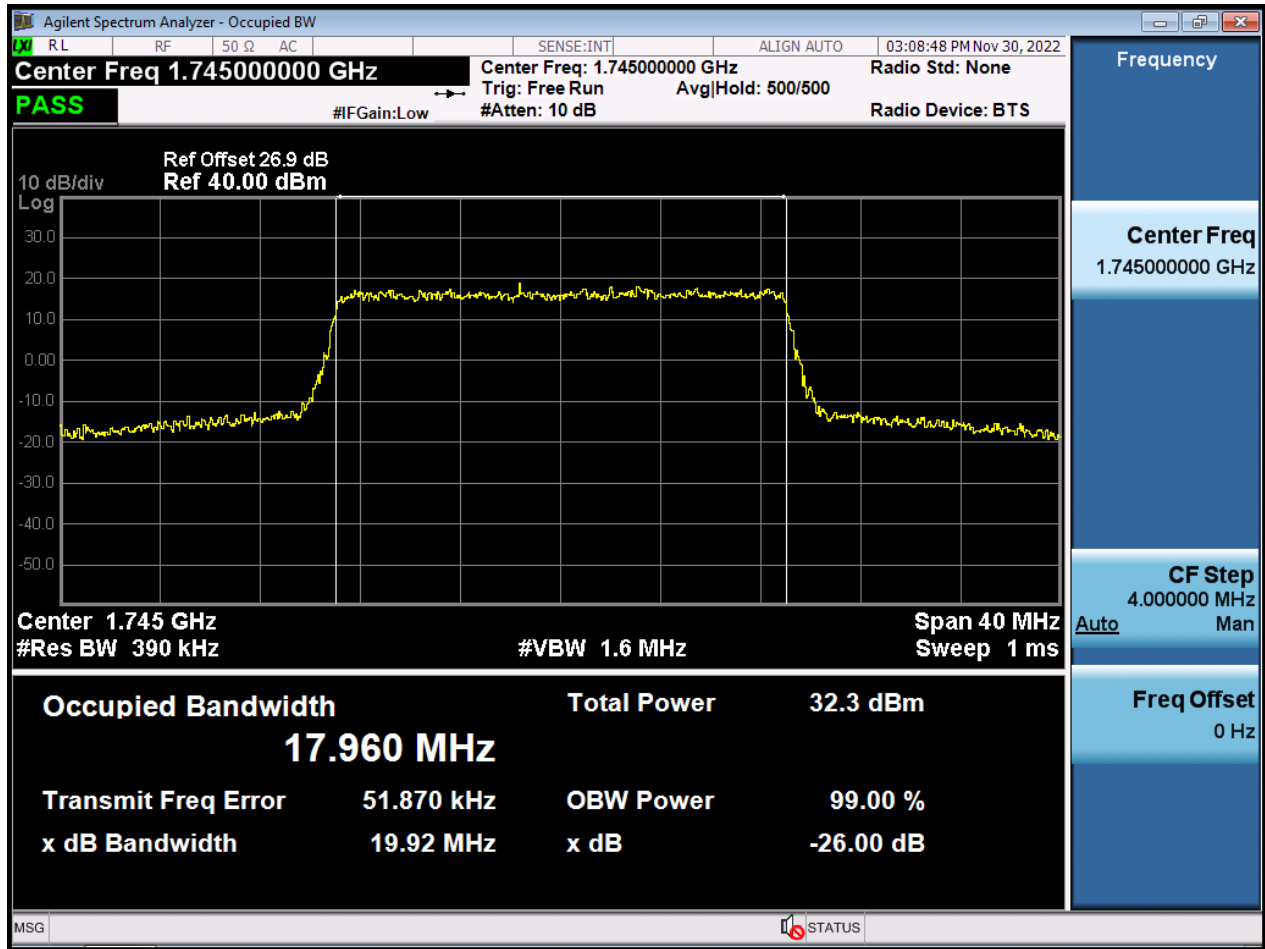


BW20M_OBW_Middle Channel_16QAM_FullIRB

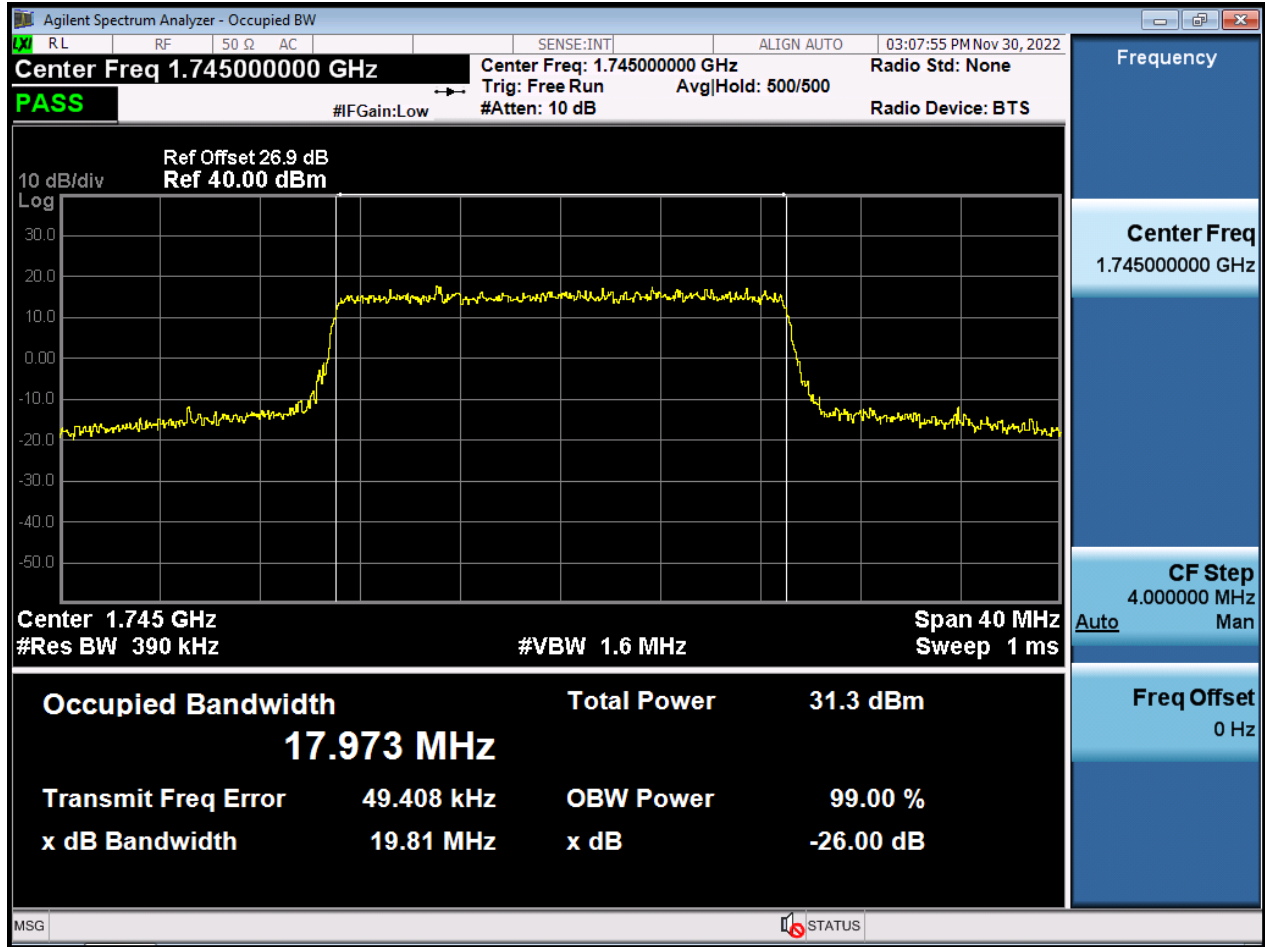


BW20M_OBW_Middle Channel_64QAM_FullIRB

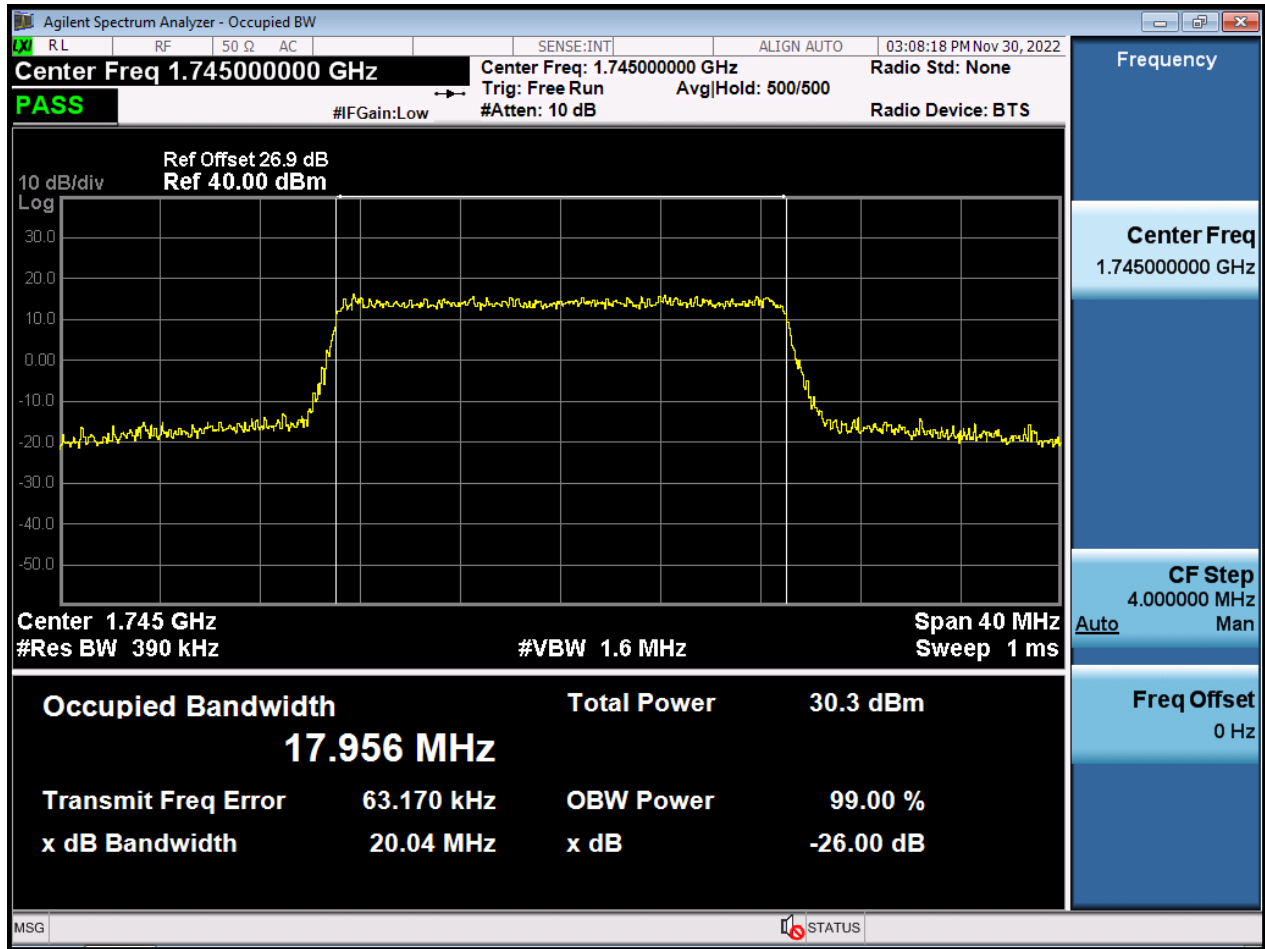


BW20M_OBW_Middle Channel_256QAM_FullRB

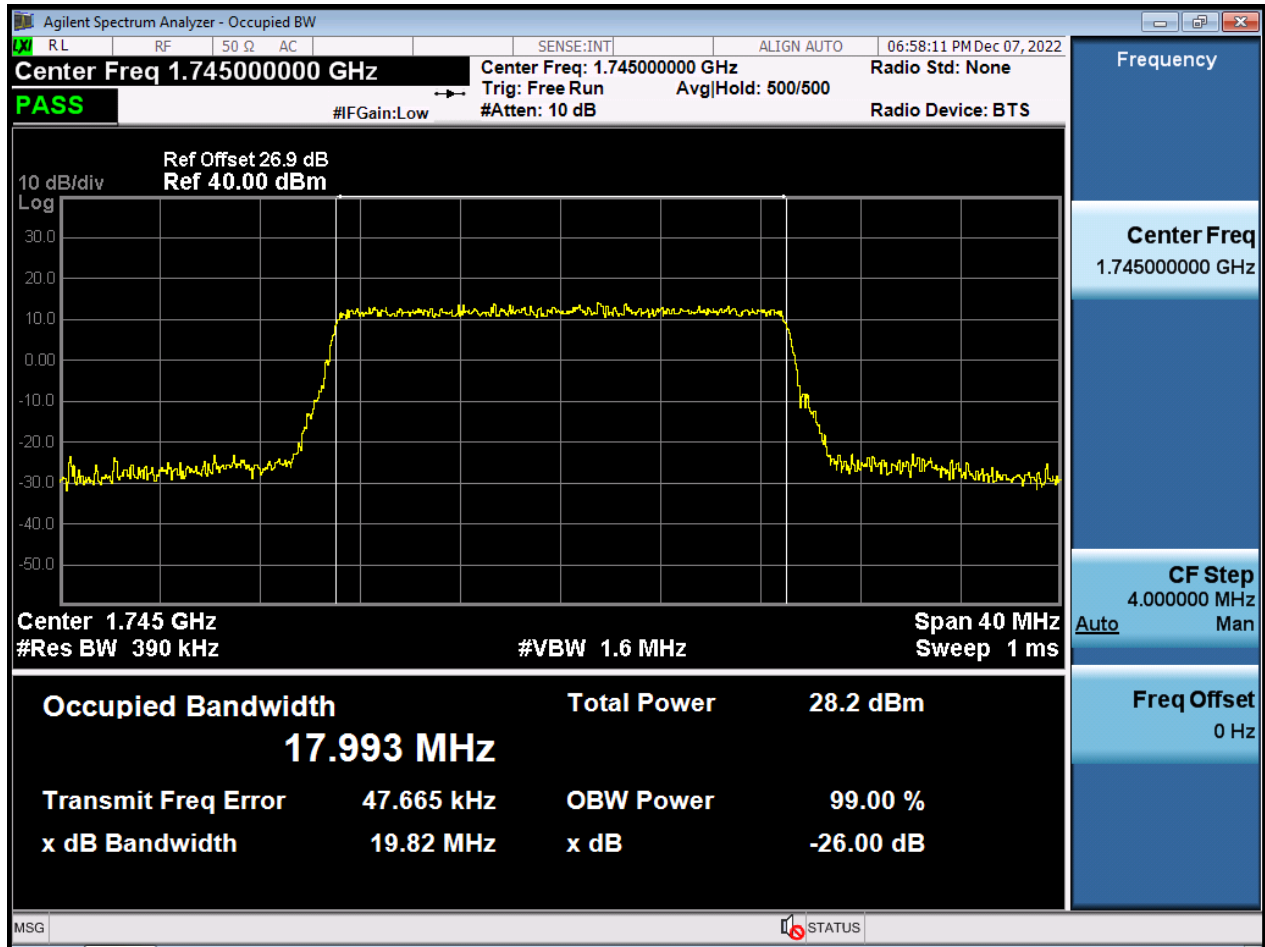


BW1.4M_PAR_Middle Channel_QPSK_FullRB

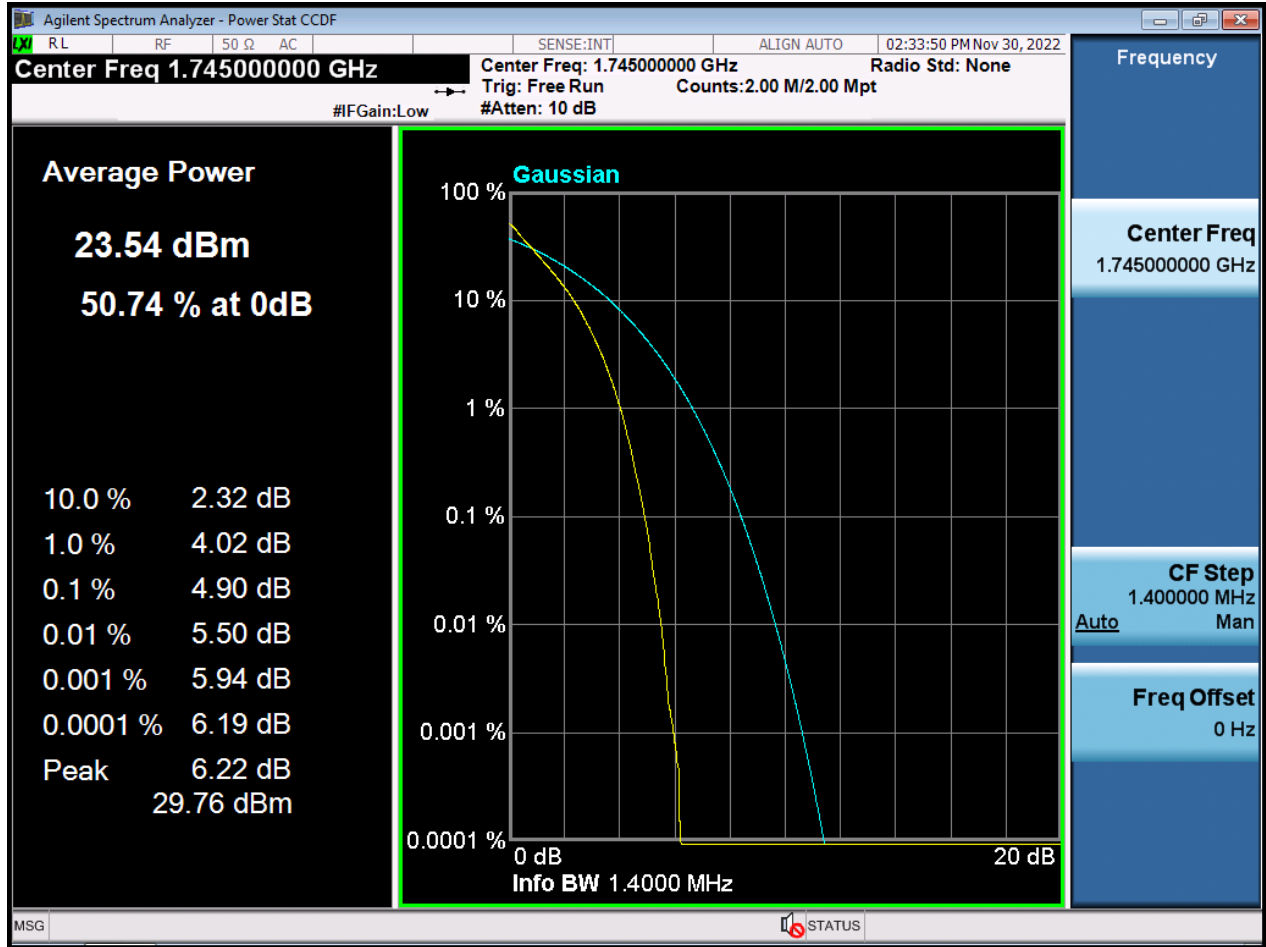


BW1.4M_PAR_Middle Channel_16QAM_FullRB

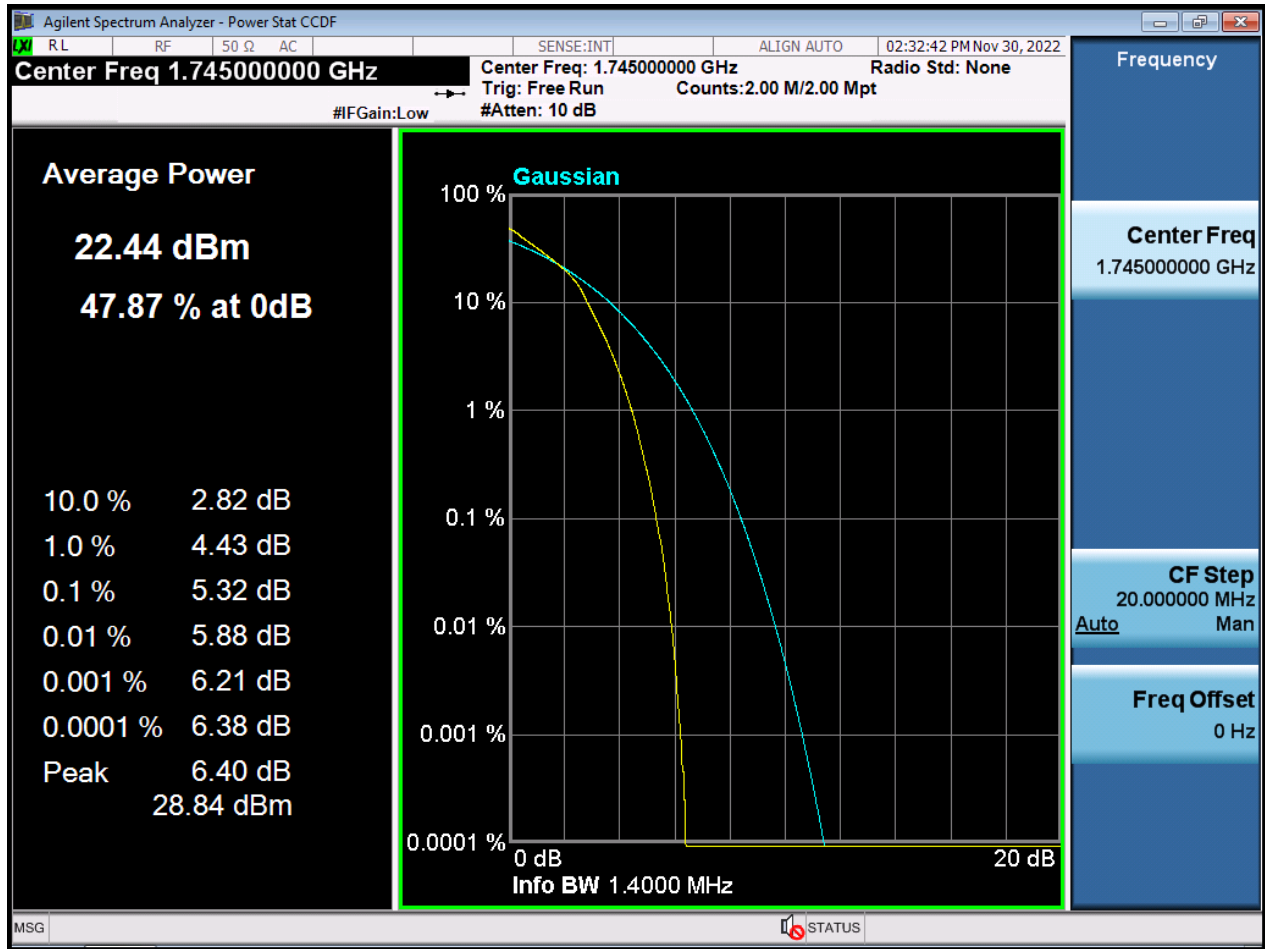


BW1.4M_PAR_Middle Channel_64QAM_FullRB

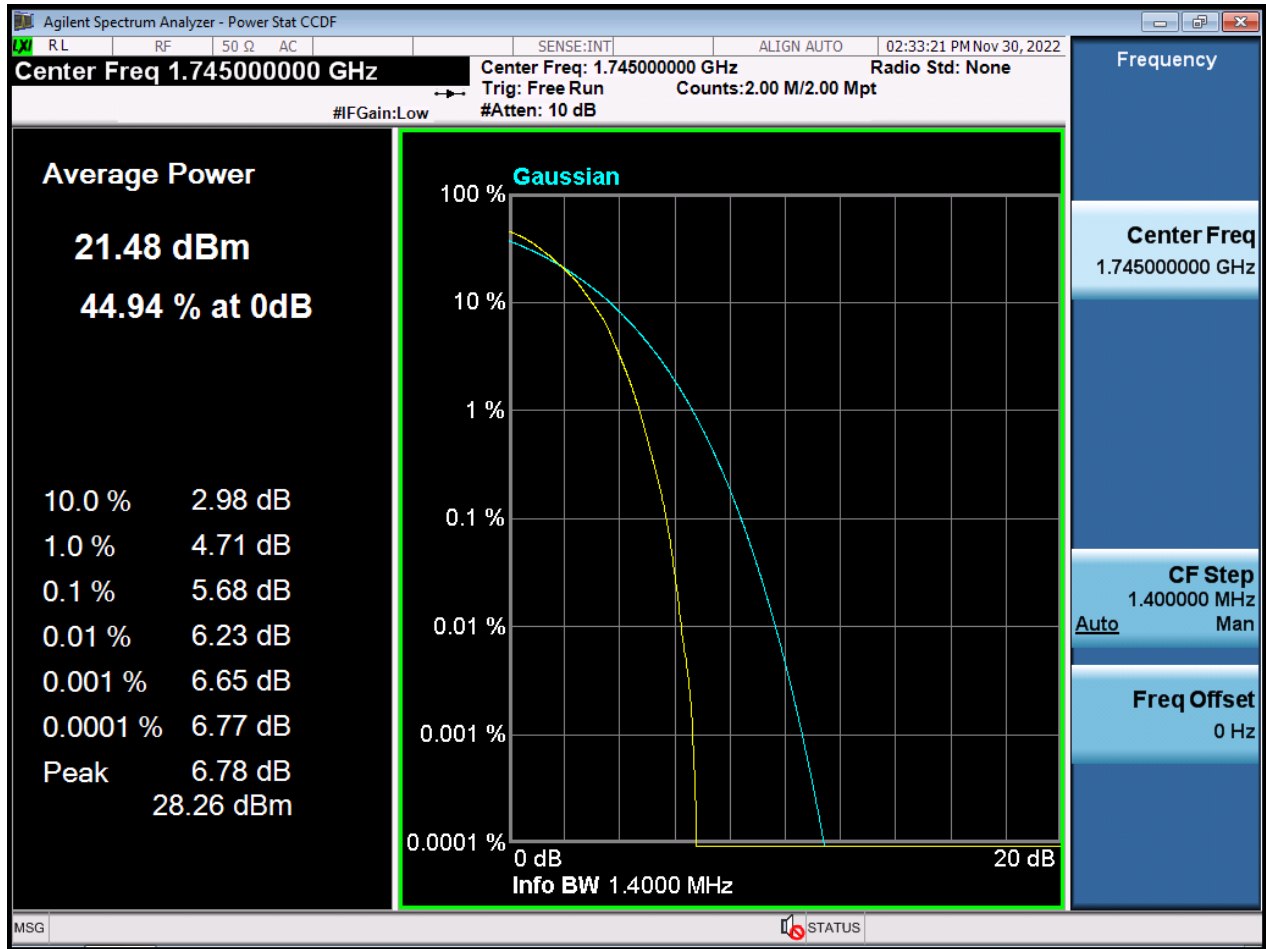


BW1.4M_PAR_Middle Channel_256QAM_FullIRB

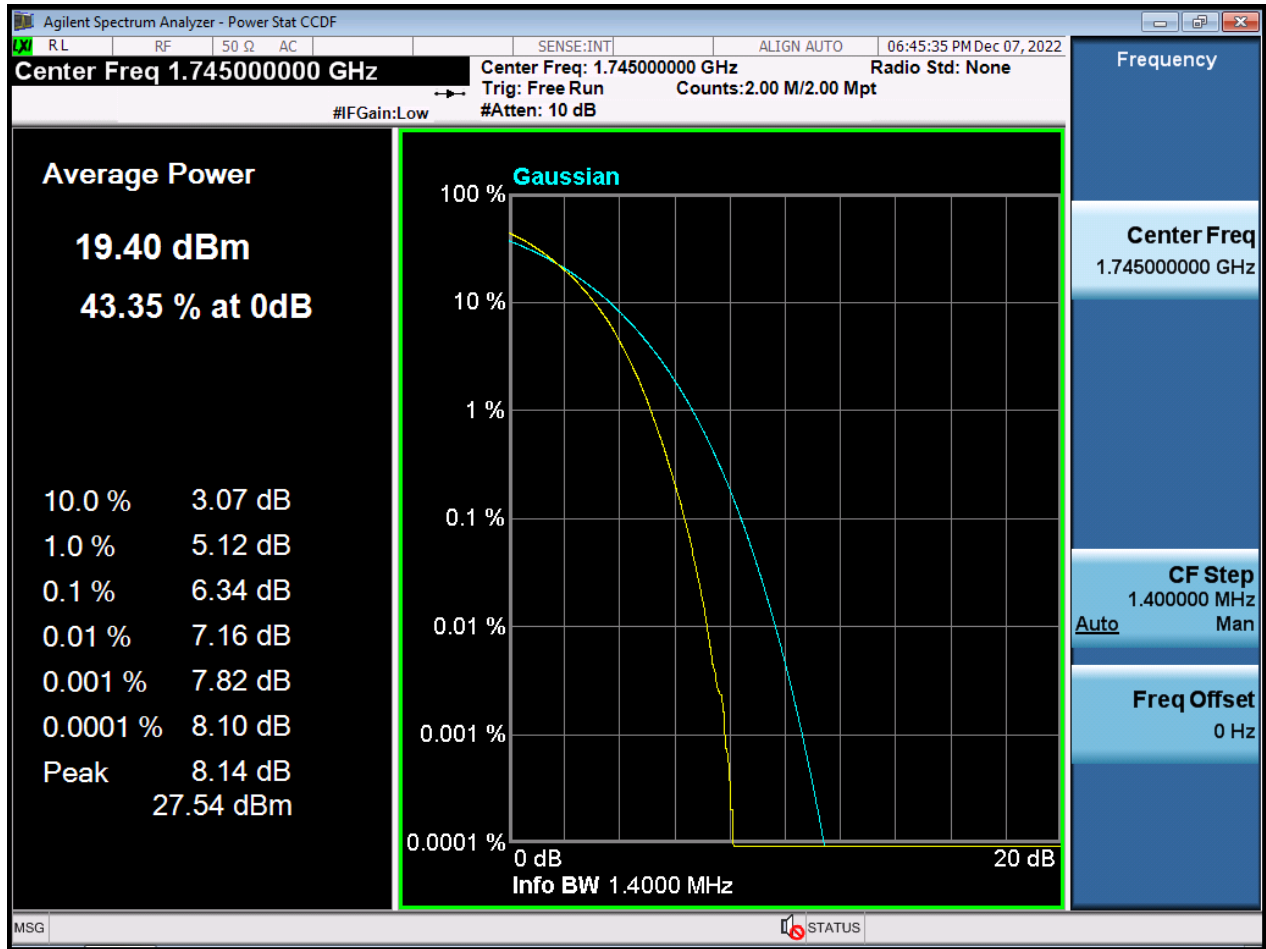


BW3M_PAR_Middle Channel_QPSK_FullRB

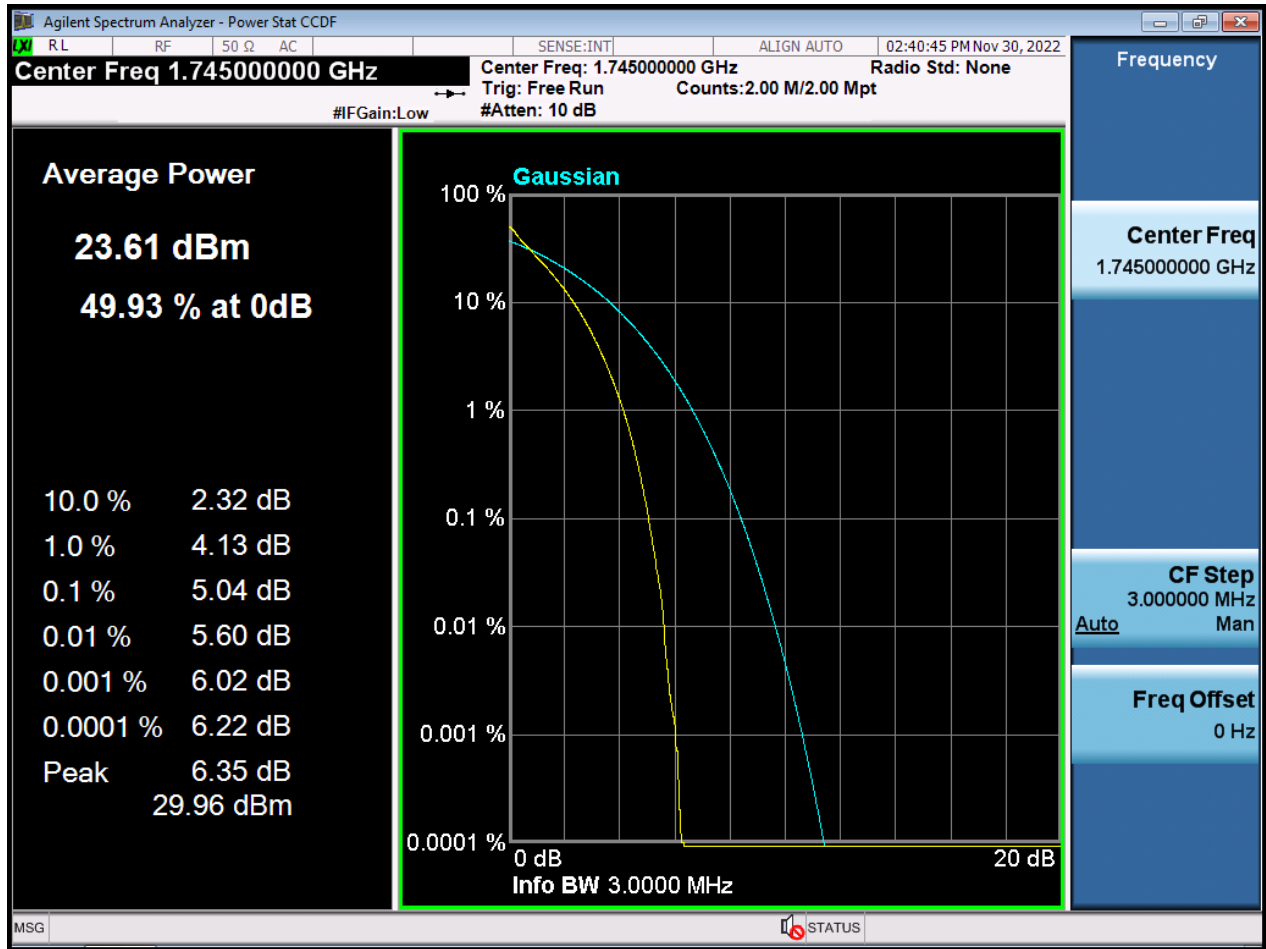


BW3M_PAR_Middle Channel_16QAM_FullRB

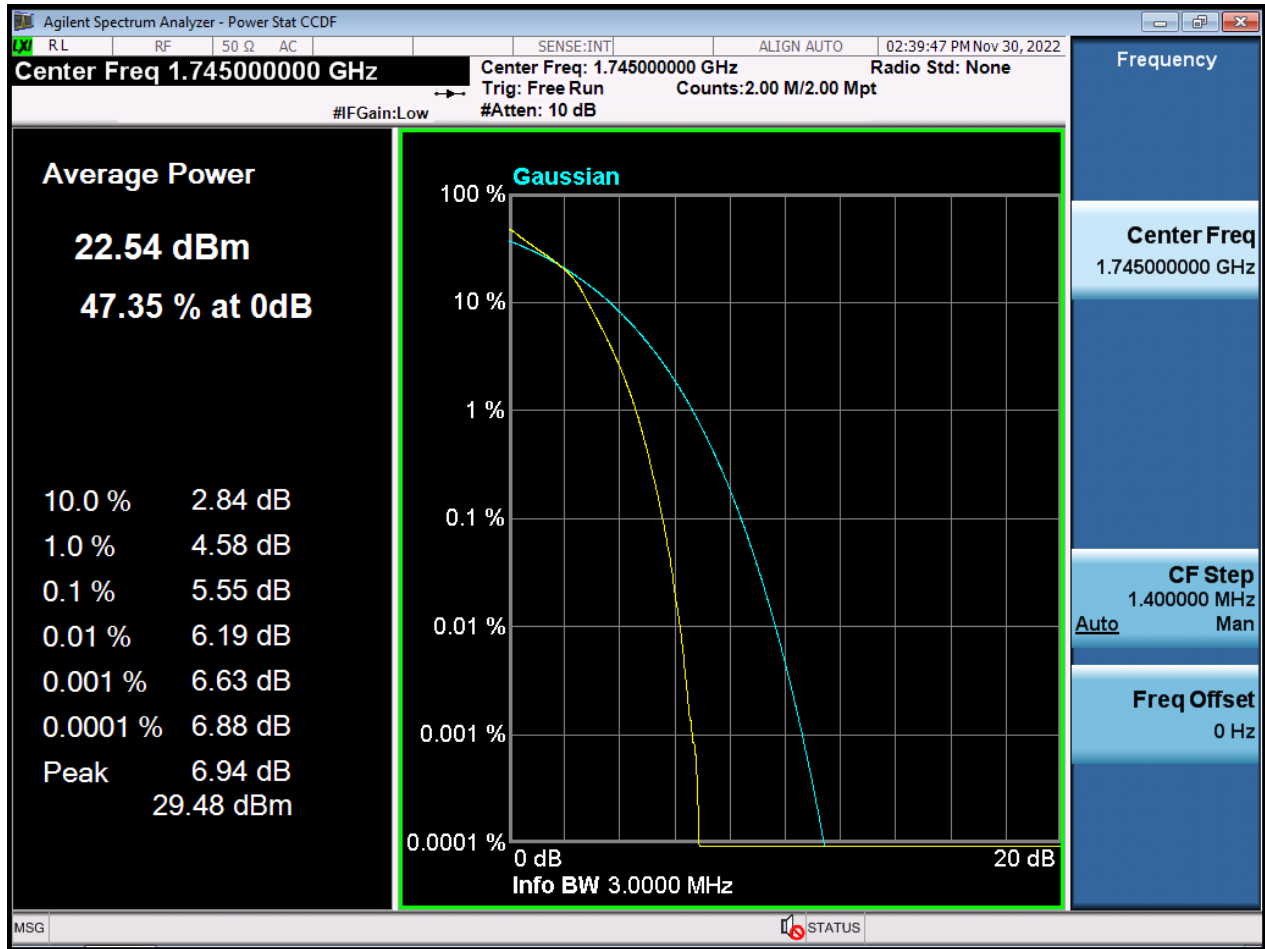


BW3M_PAR_Middle Channel_64QAM_FullRB

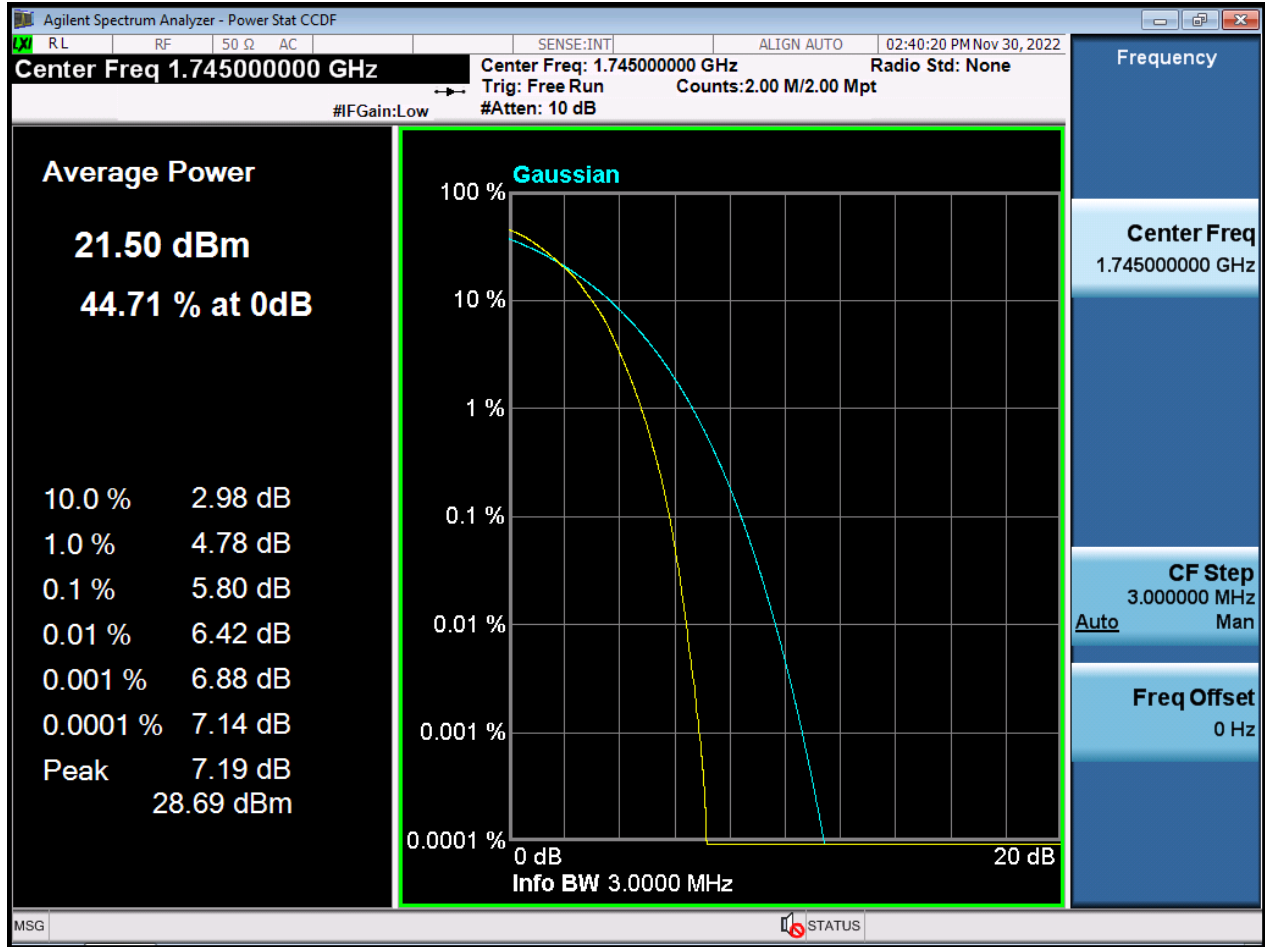


BW3M_PAR_Middle Channel_256QAM_FullRB

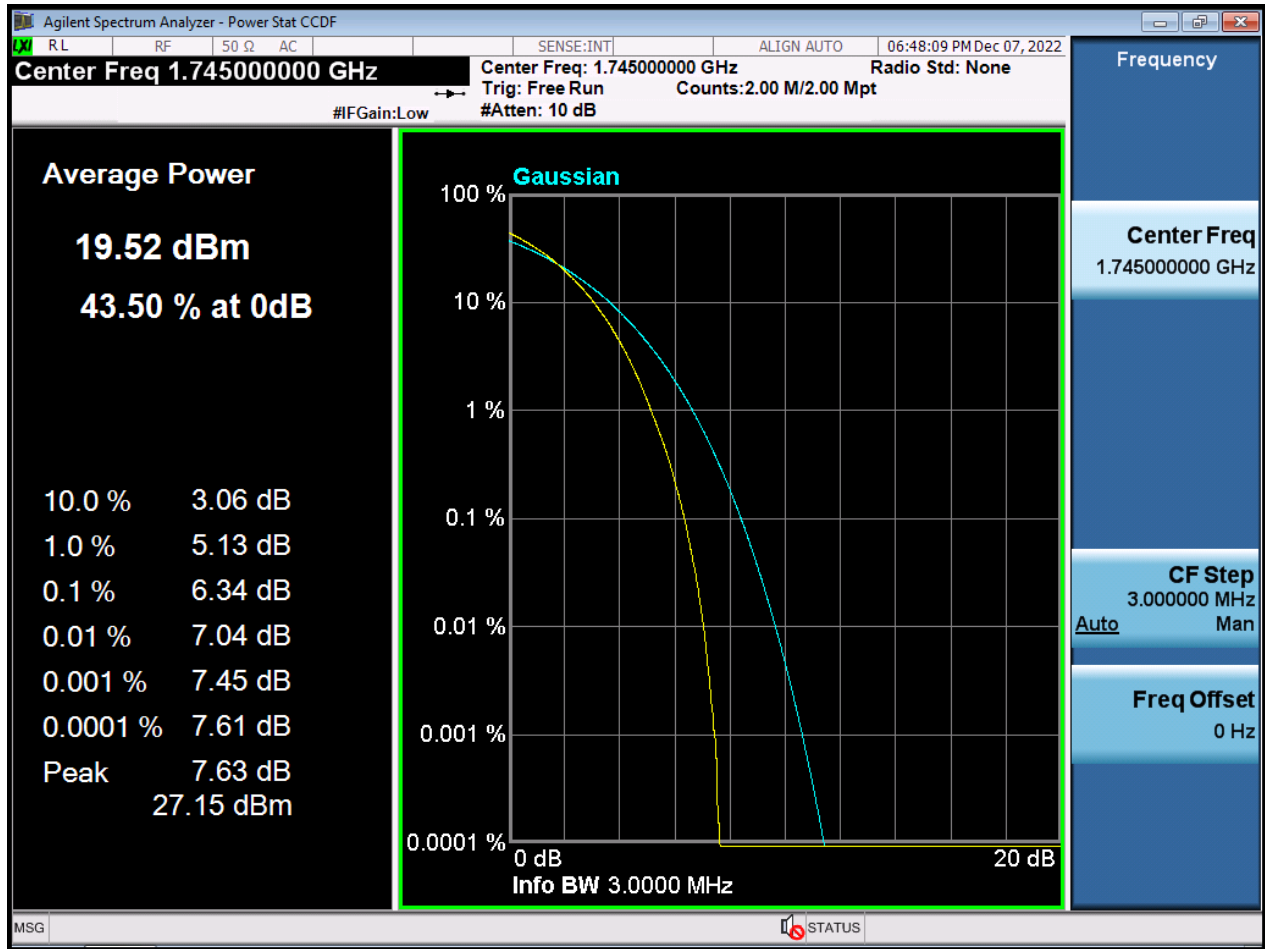


BW5M_PAR_Middle Channel_QPSK_FullRB

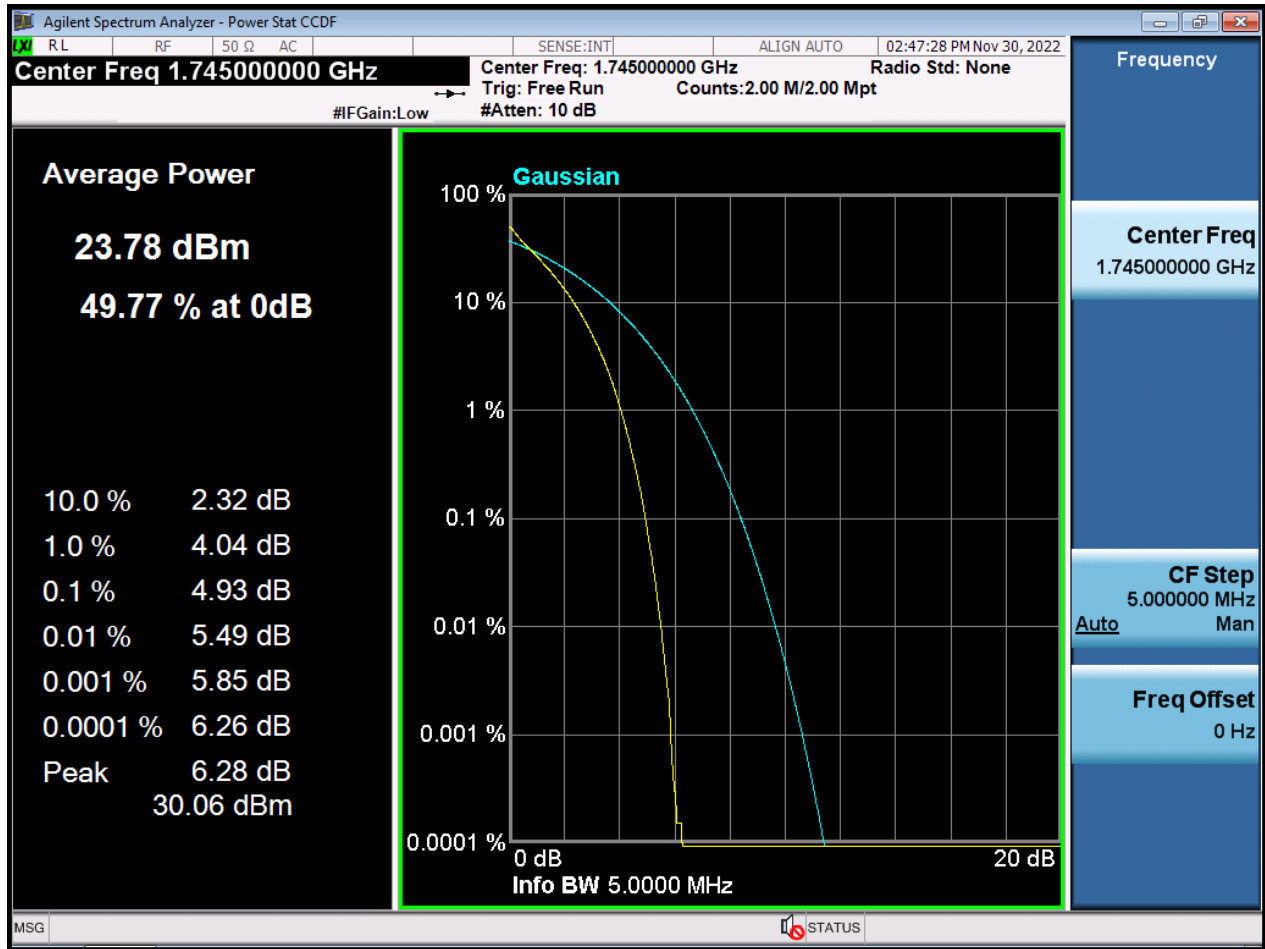


BW5M_PAR_Middle Channel_16QAM_FullRB

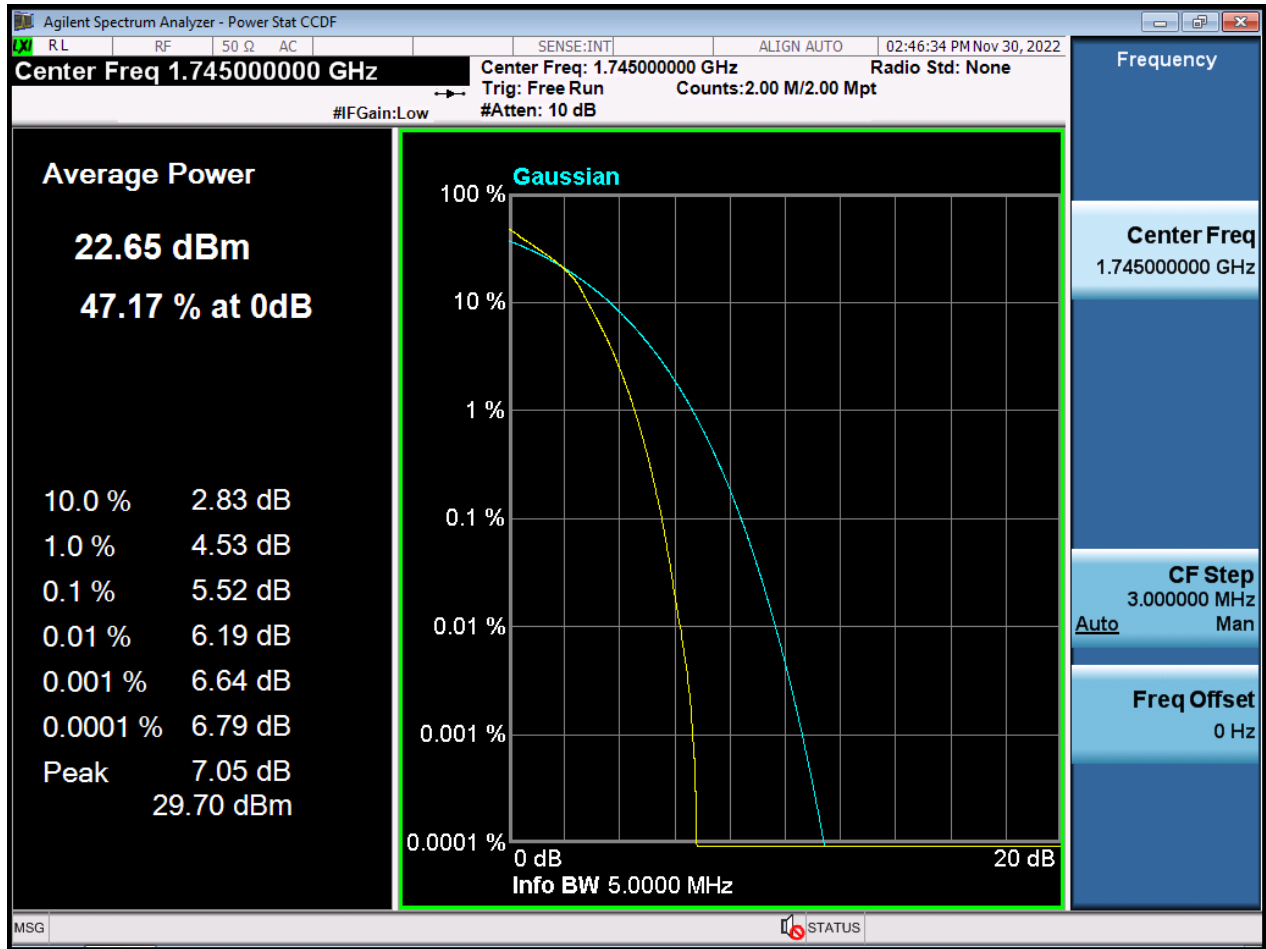


BW5M_PAR_Middle Channel_64QAM_FullRB

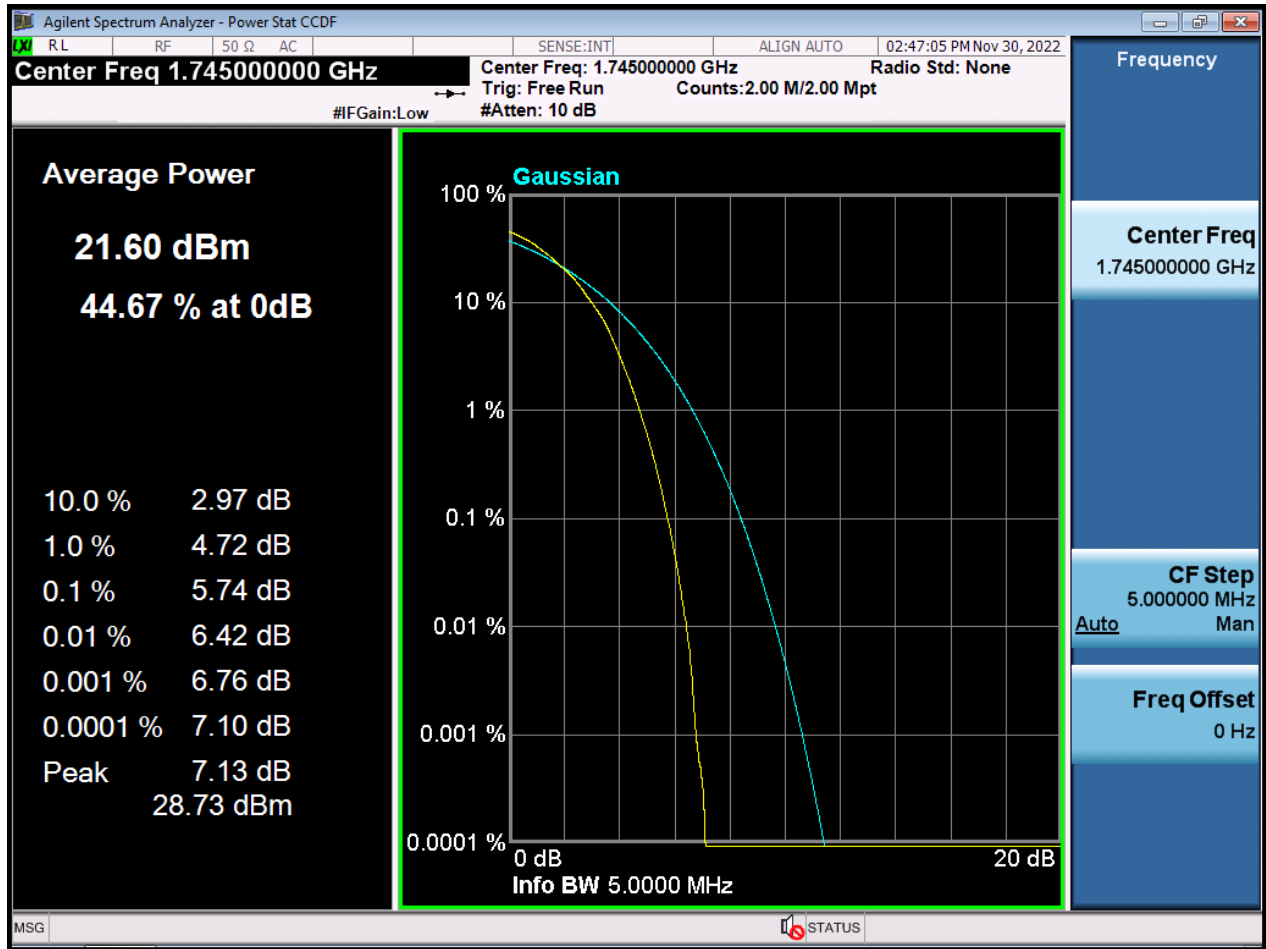


BW5M_PAR_Middle Channel_256QAM_FullRB

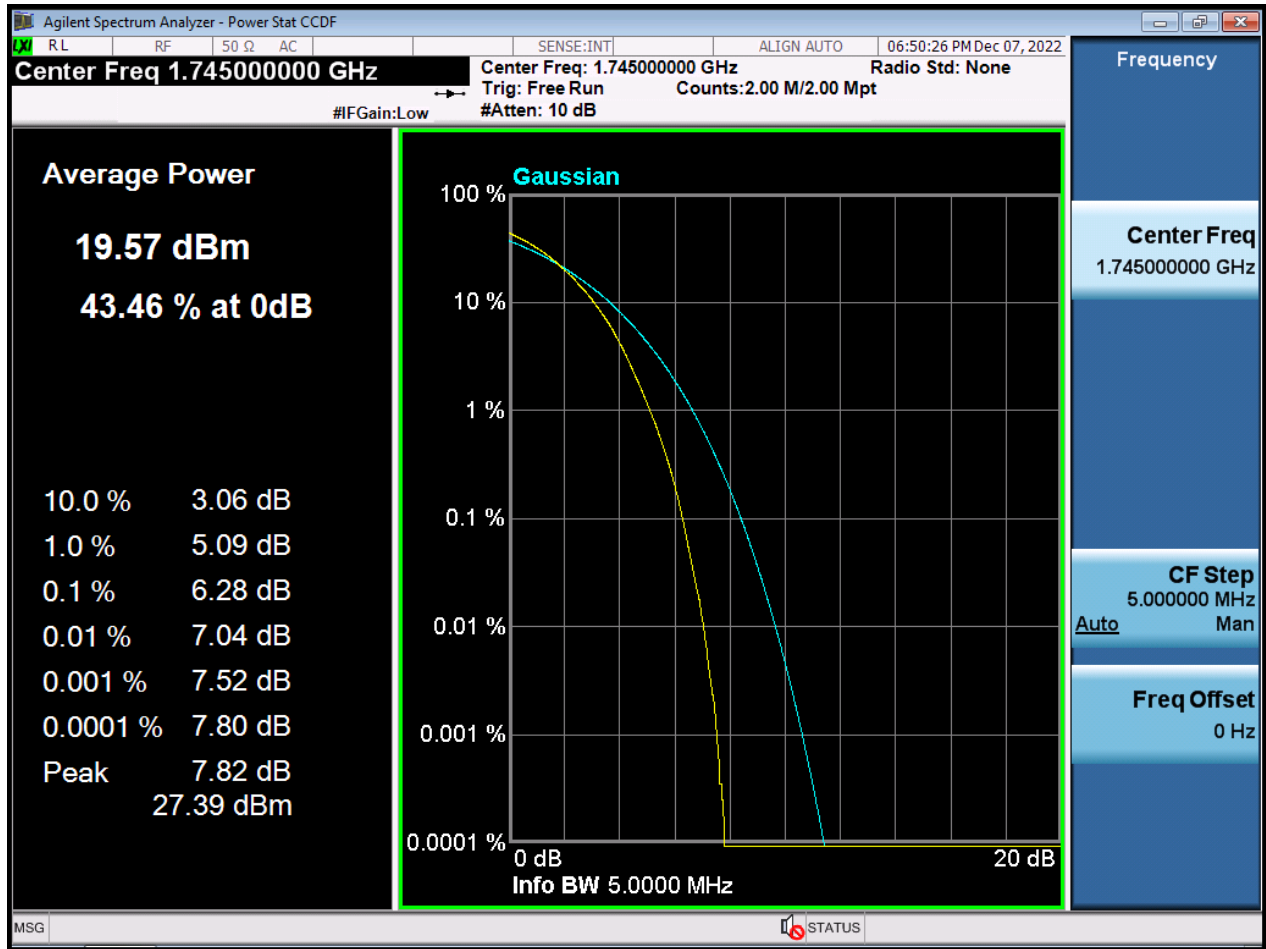


BW10M_PAR_Middle Channelz_QPSK_FullIRB

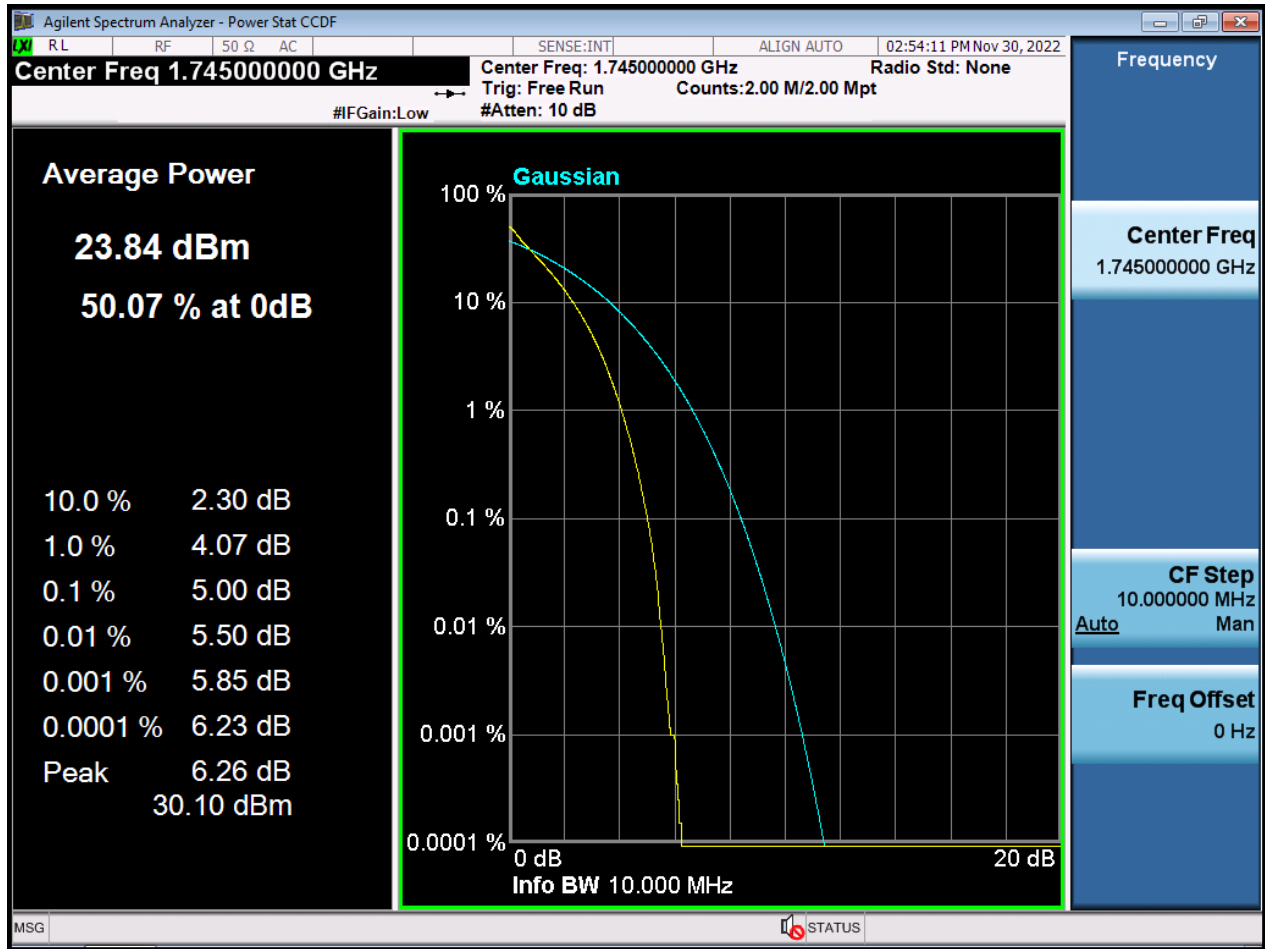


BW10M_PAR_Middle Channel_16QAM_FullRB

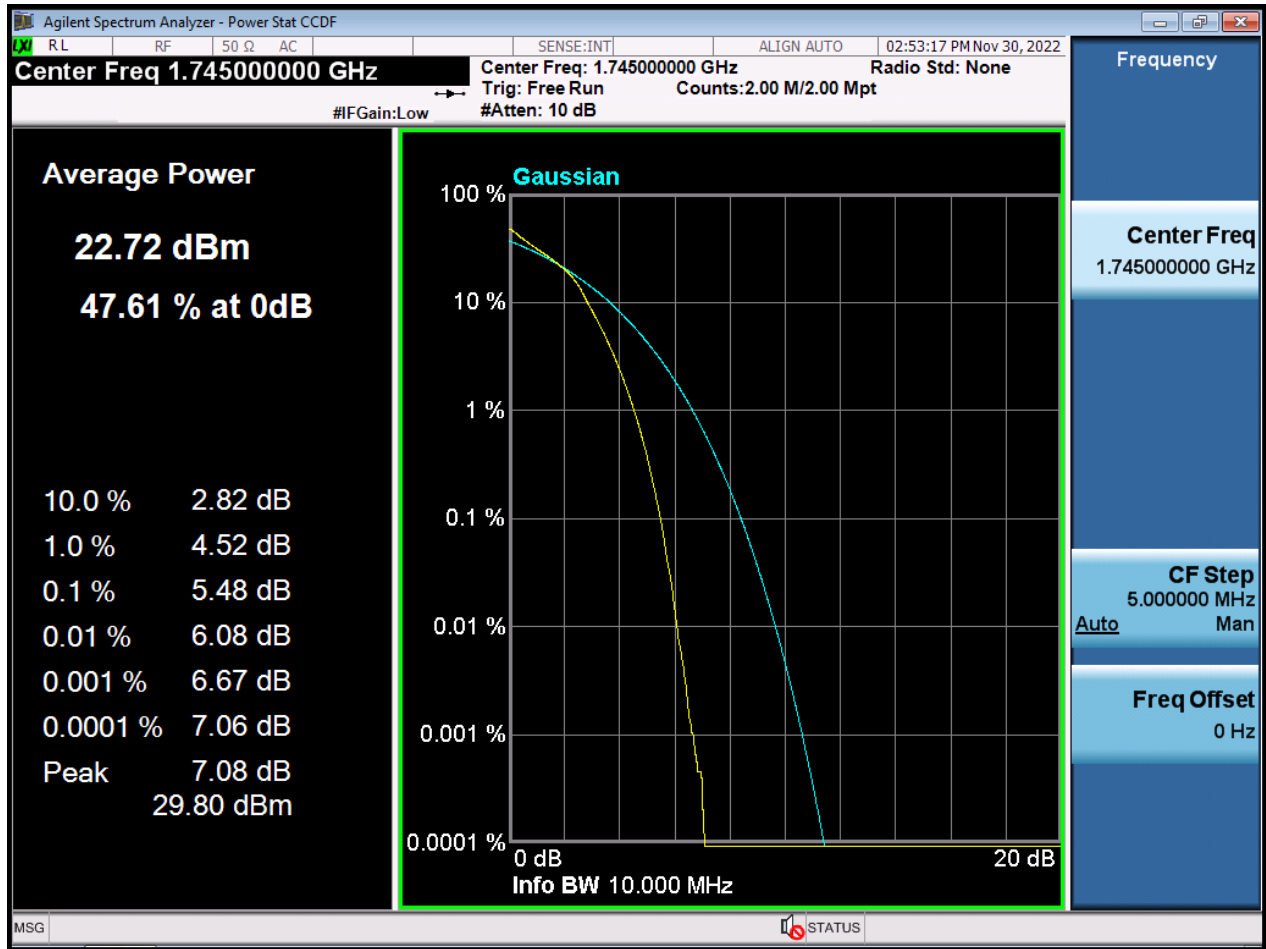


BW10M_PAR_Middle Channel_64QAM_FullRB

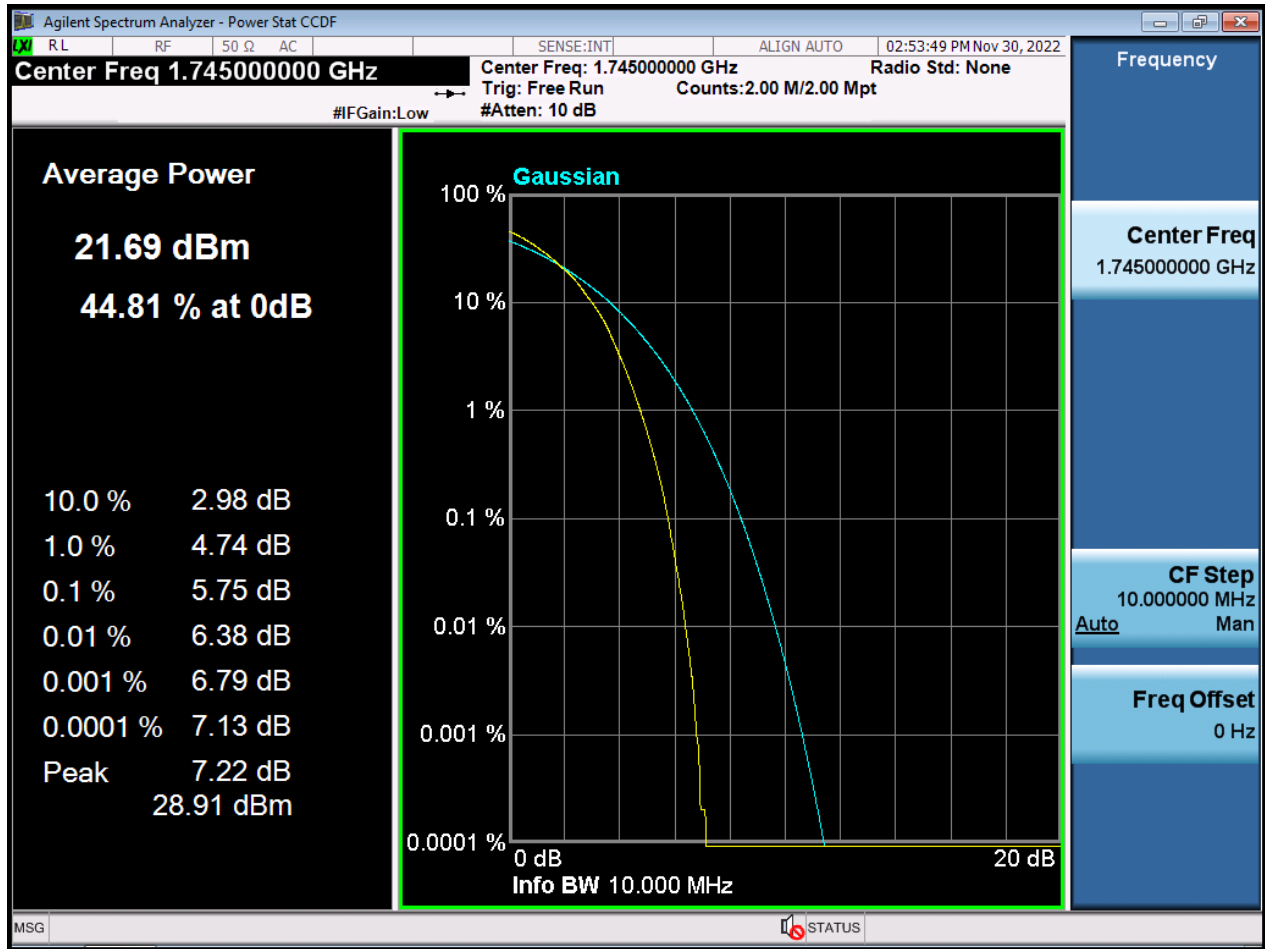


BW10M_PAR_Middle Channel_256QAM_FullIRB

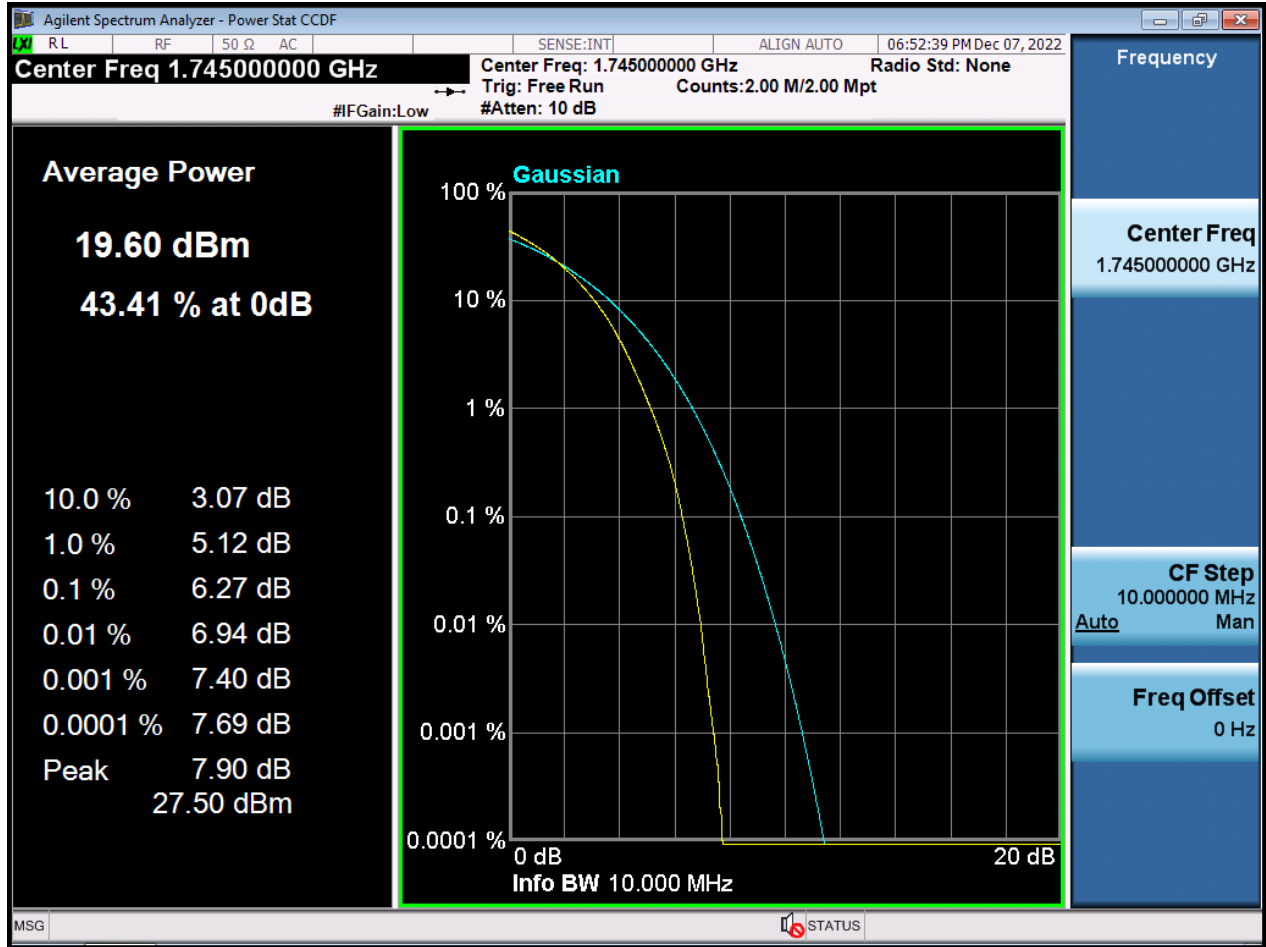


BW15M_PAR_Middle Channel_QPSK_FullRB

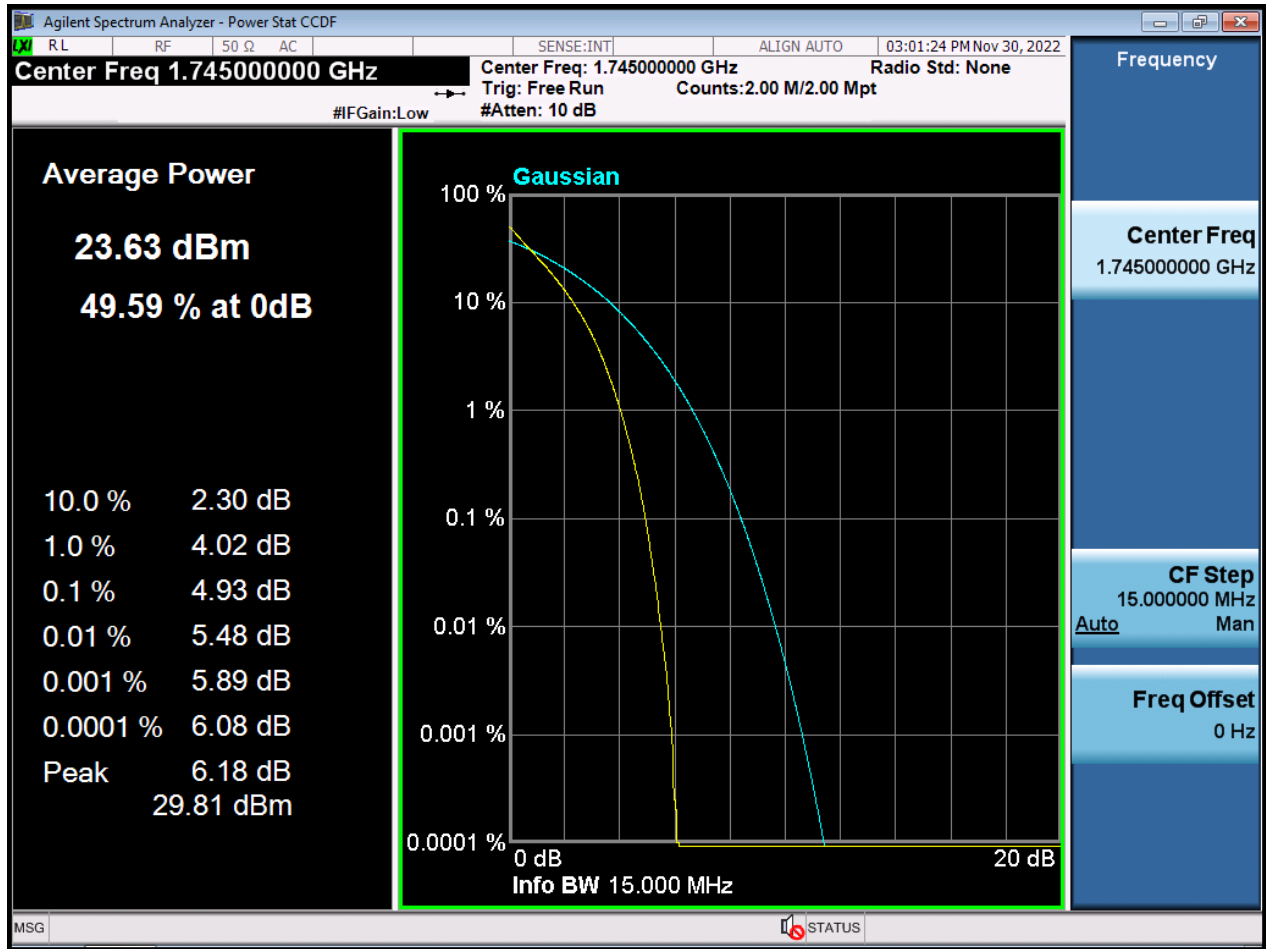


BW15M_PAR_Middle Channel_16QAM_FullIRB

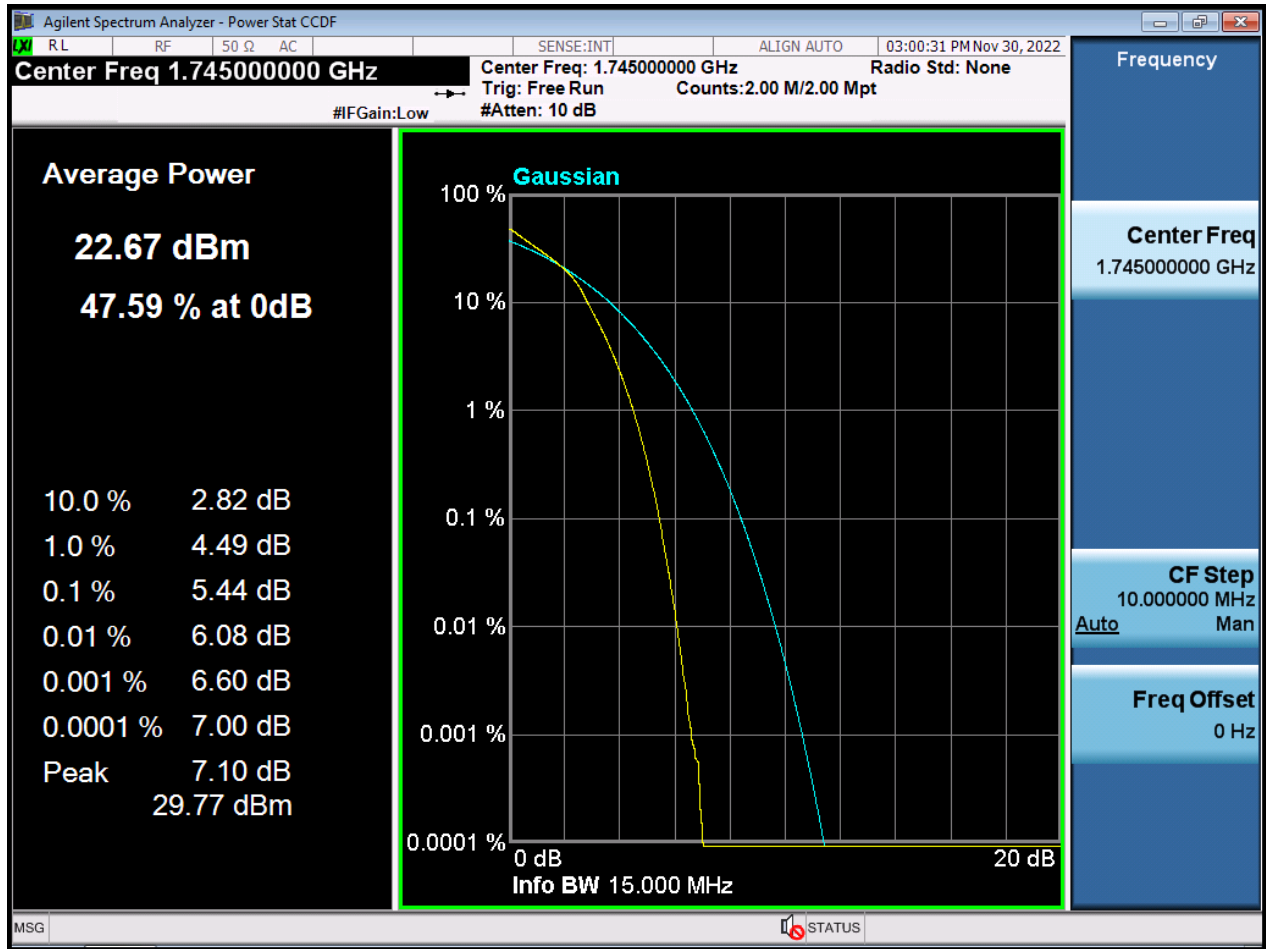


BW15M_PAR_Middle Channel_64QAM_FullIRB

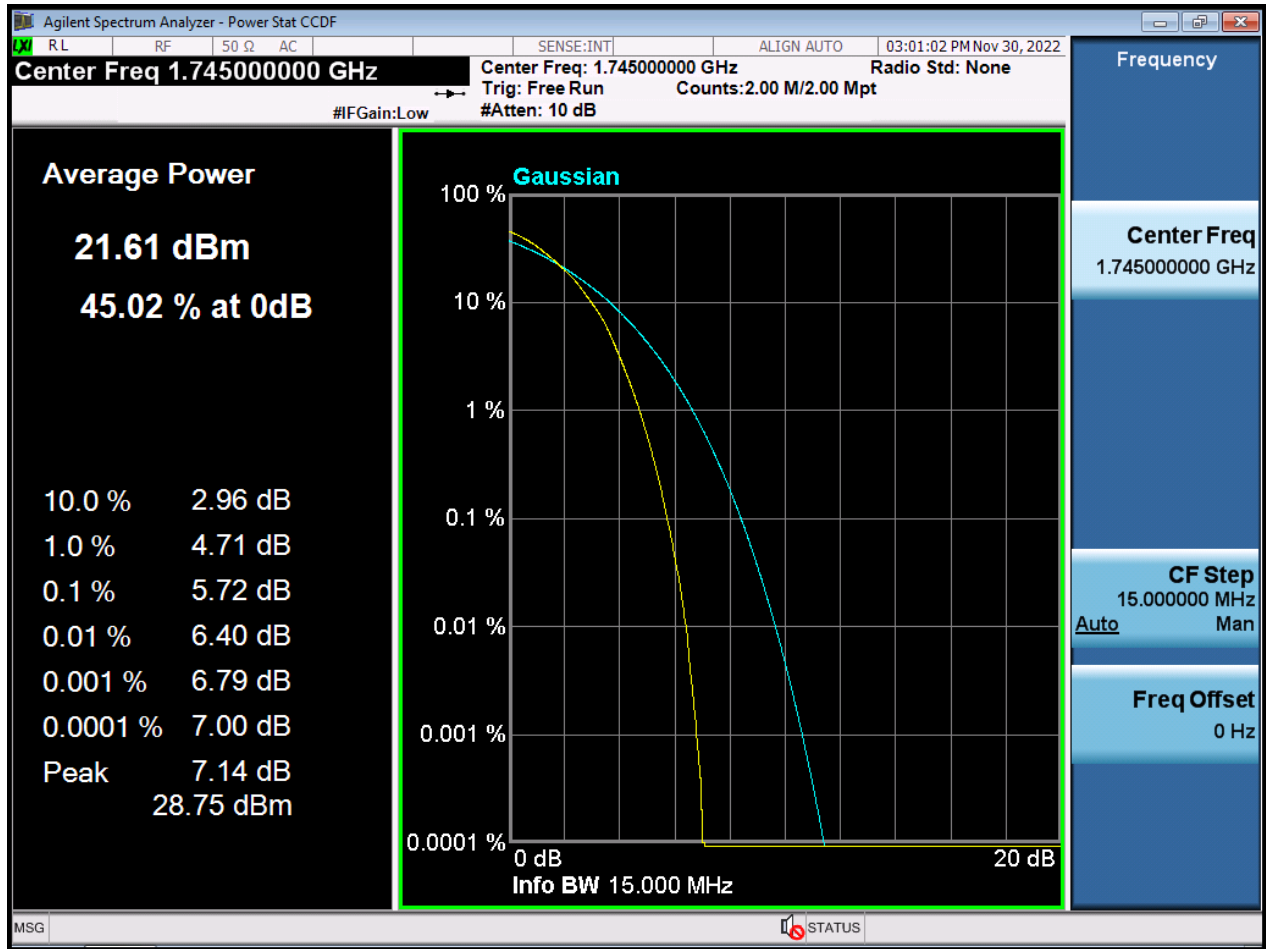


BW15M_PAR_Middle Channel_256QAM_FullIRB

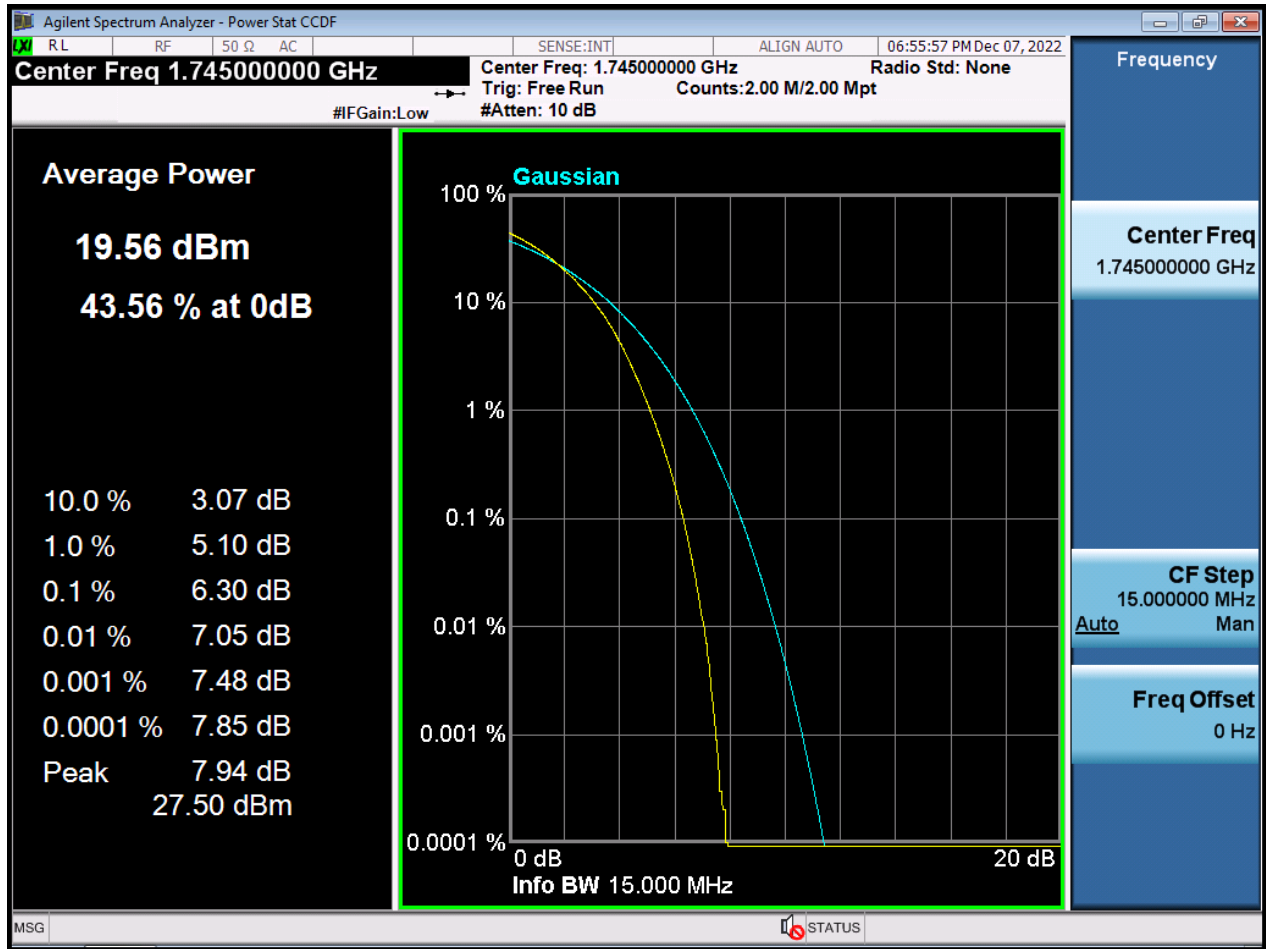


BW20M_PAR_Middle Channel_QPSK_FullIRB

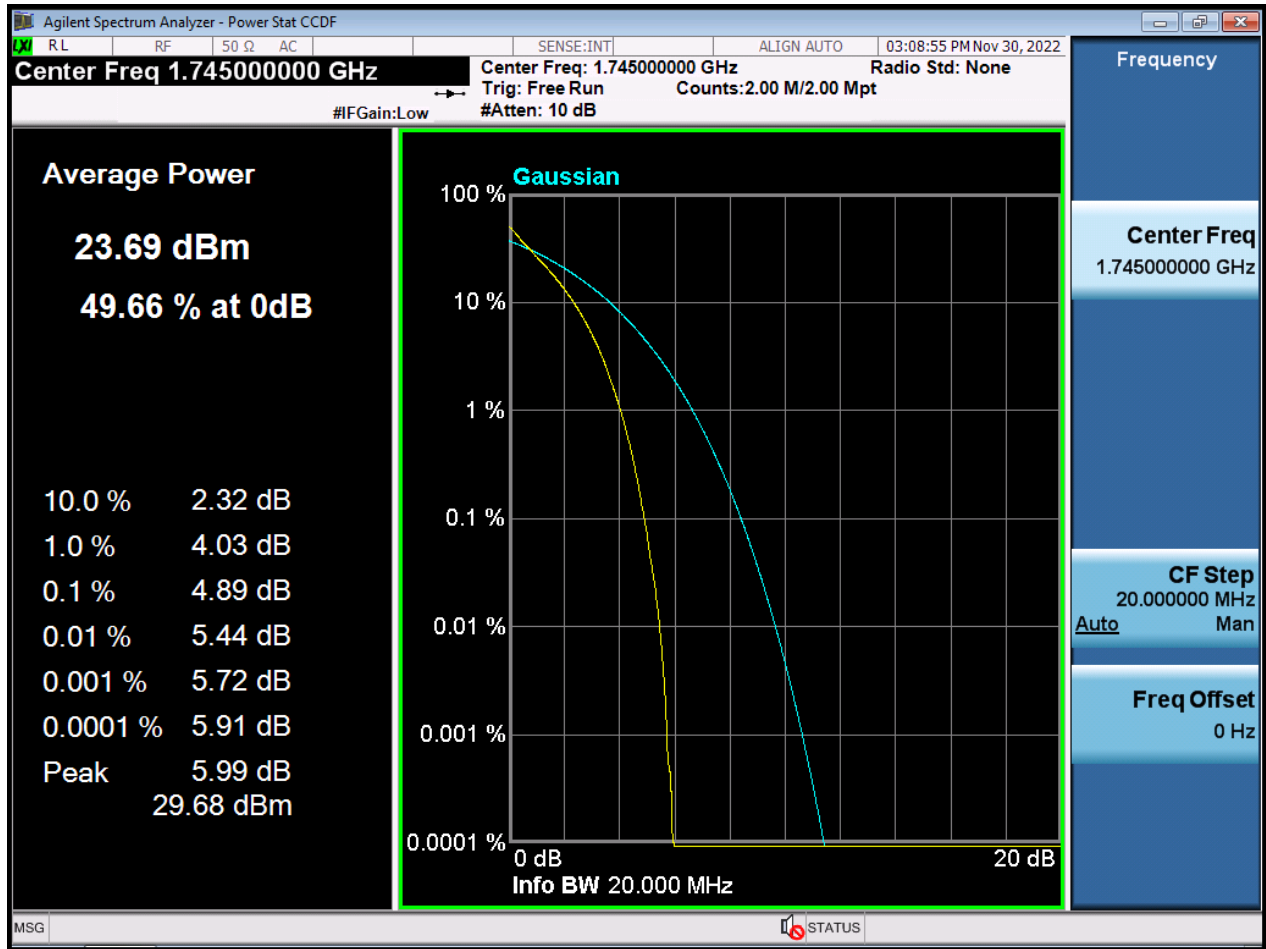


BW20M_PAR_Middle Channel_16QAM_FullRB

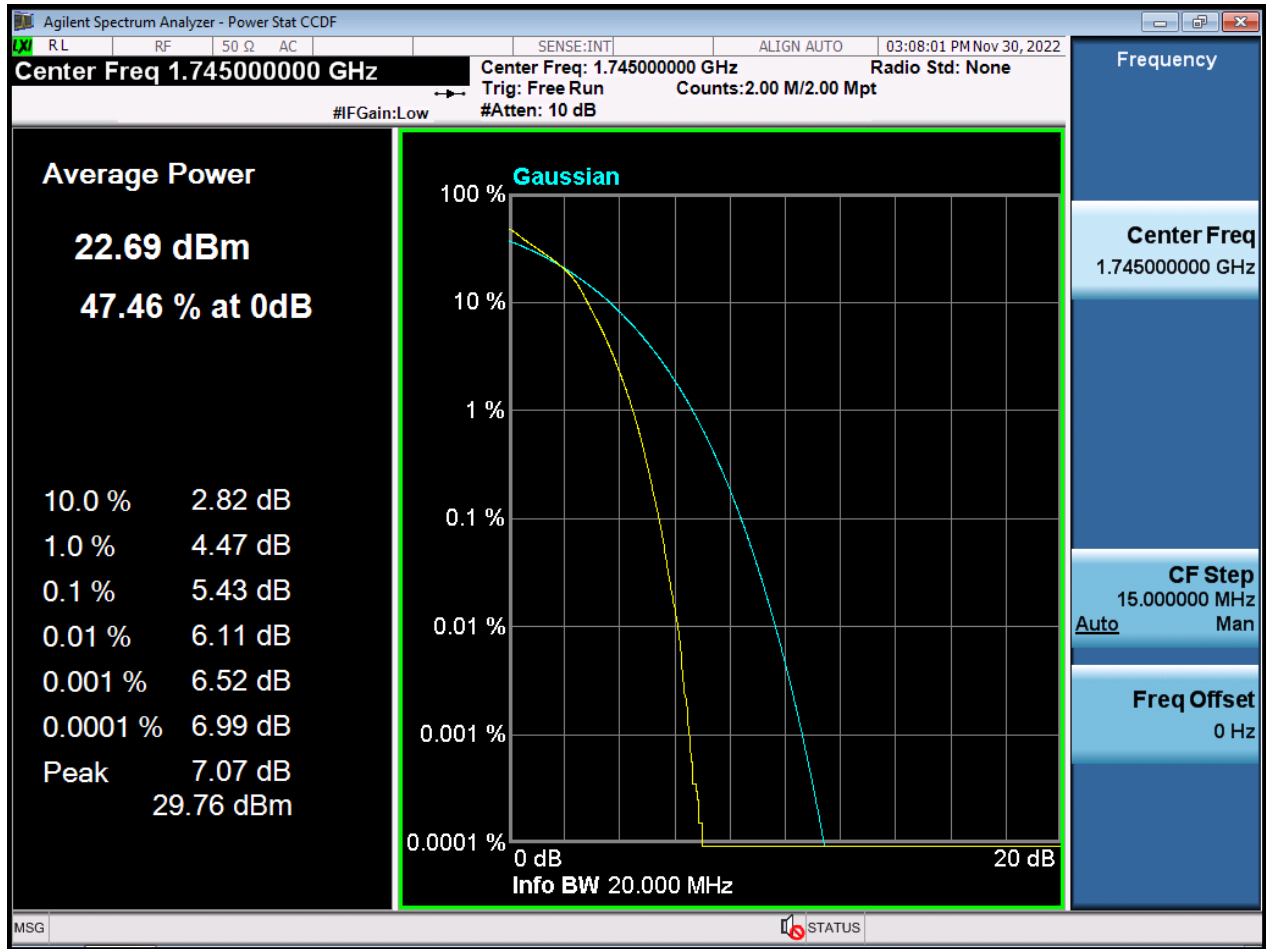


BW20M_PAR_Middle Channel_64QAM_FullIRB

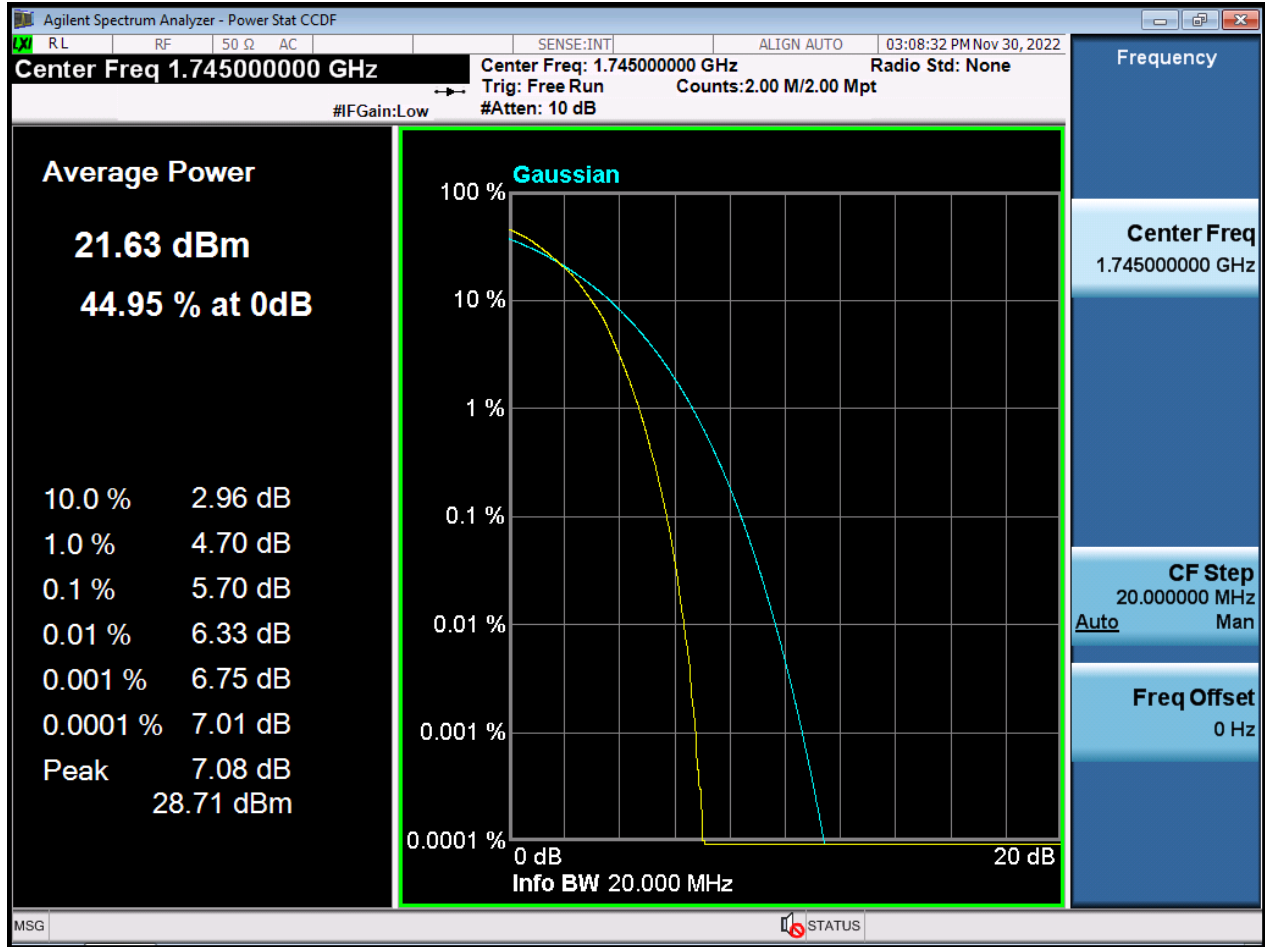


BW20M_PAR_Middle Channel_256QAM_FullIRB

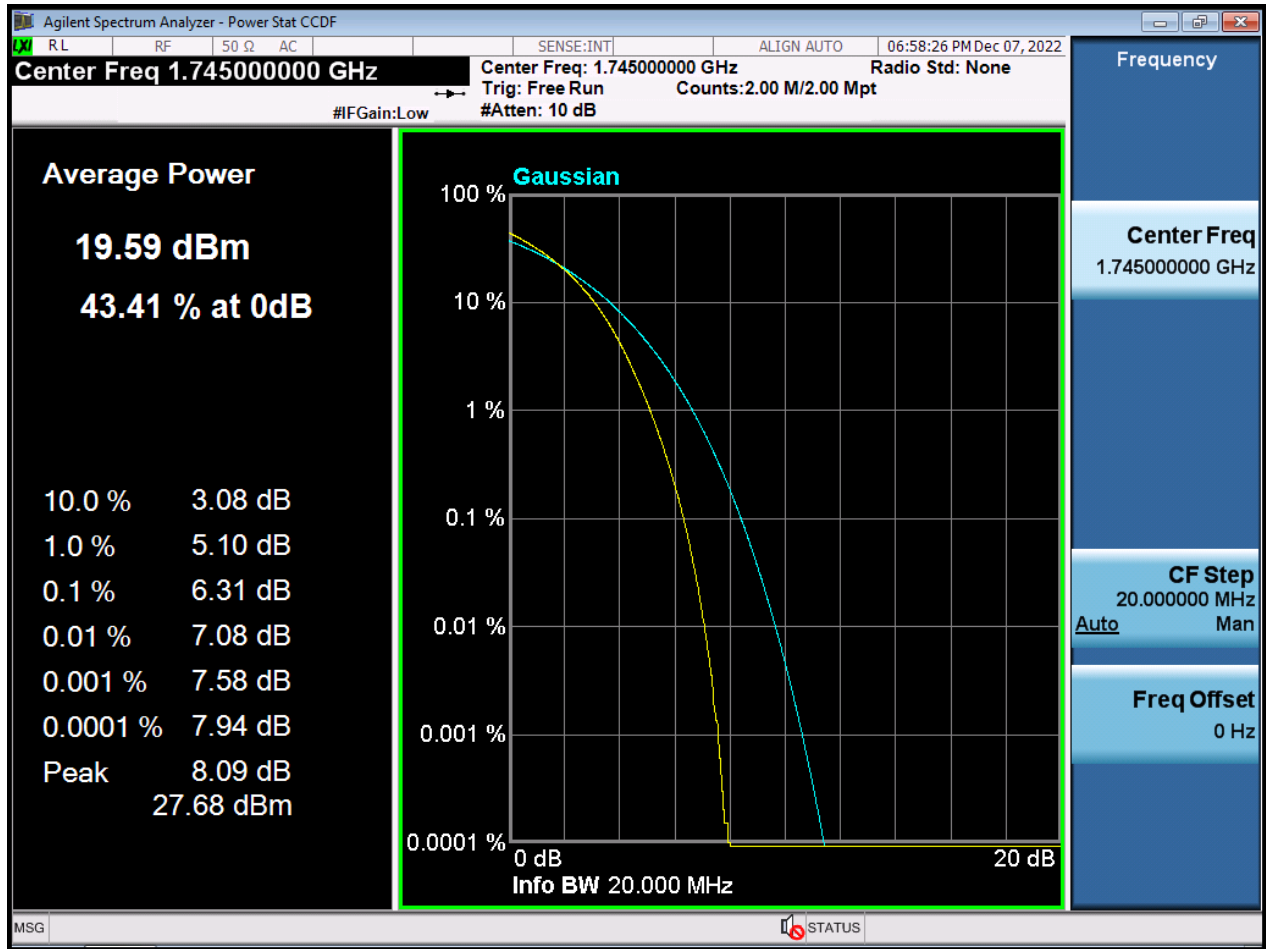


BW1.4M_CSE(30M-10 G)_Lowest Channel_QPSK_1RB

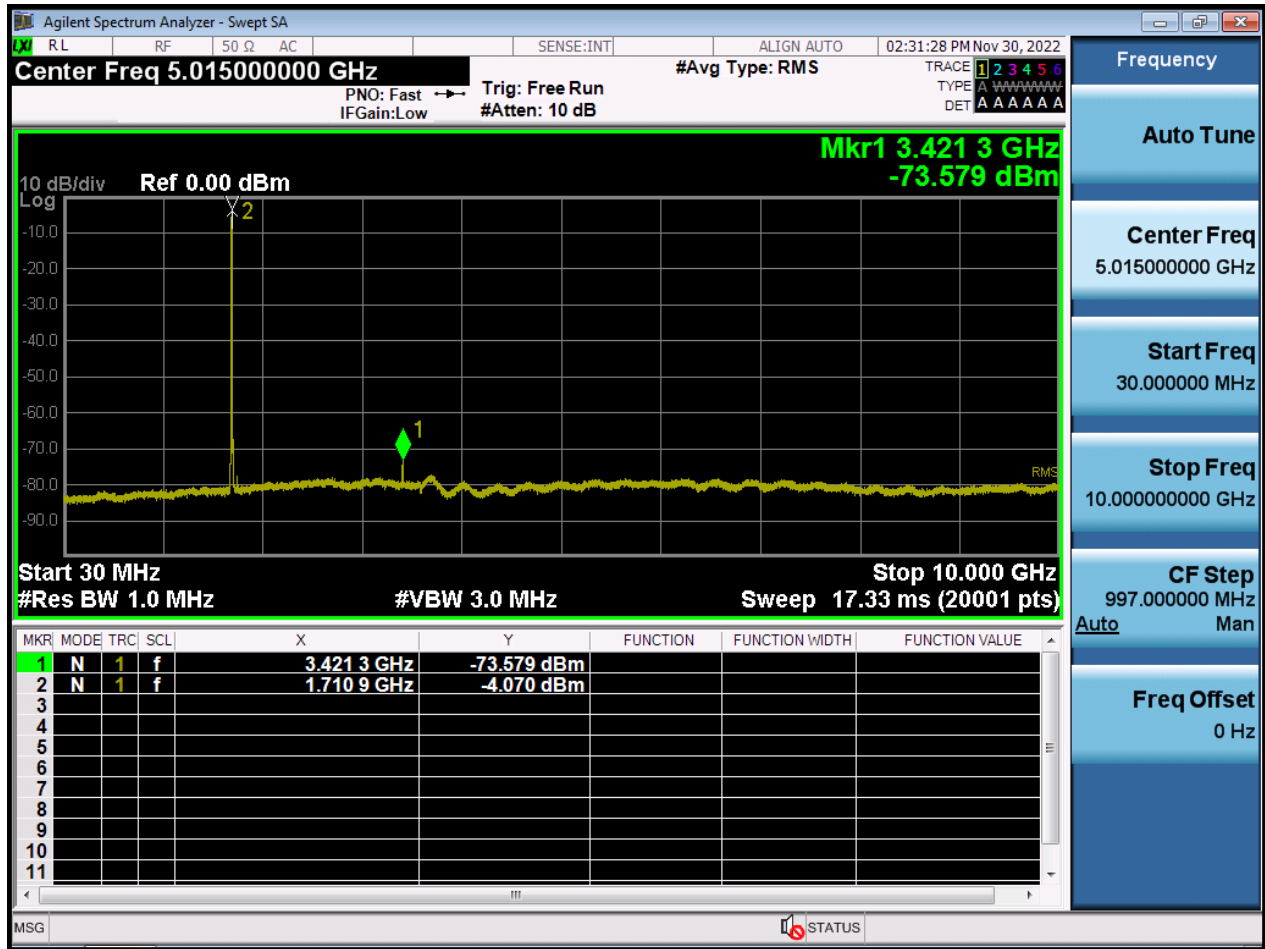


BW1.4M_CSE(30M-10 G)_Middle Channel_QPSK_1RB

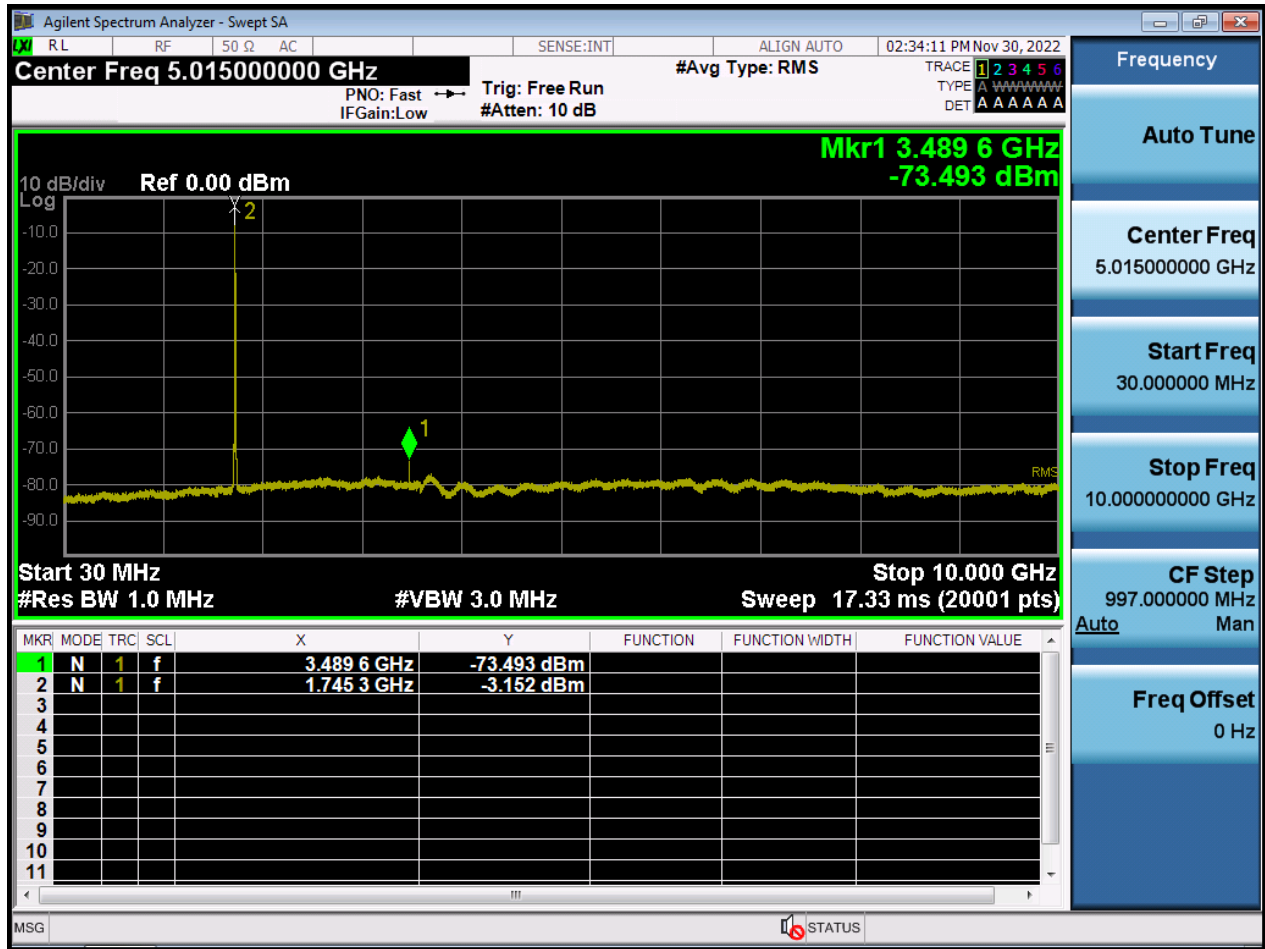


BW1.4M_CSE(30M-10 G)_Highest Channel_QPSK_1RB

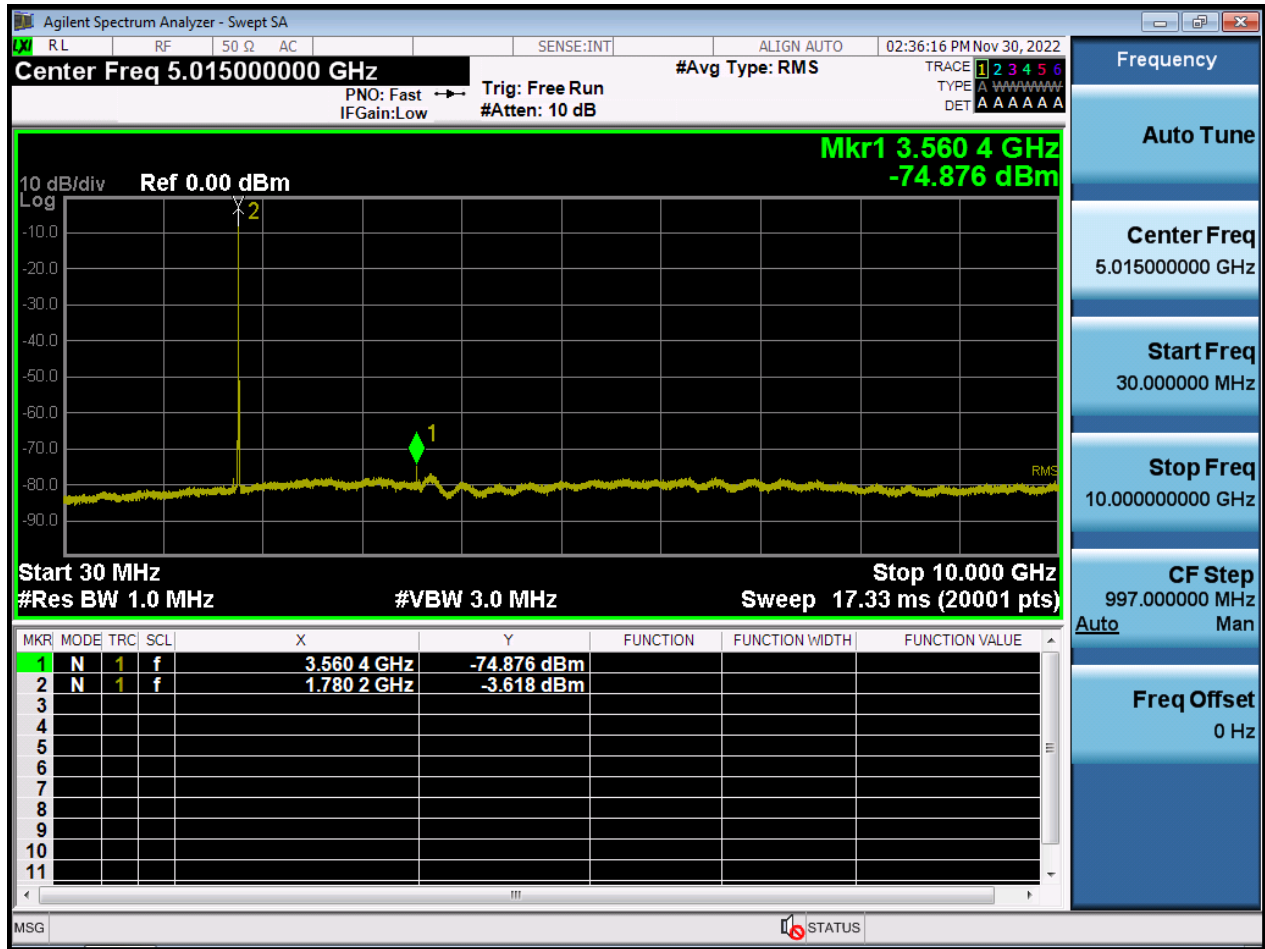


BW3M_CSE(30M-10 G)_Lowest Channel_QPSK_1RB

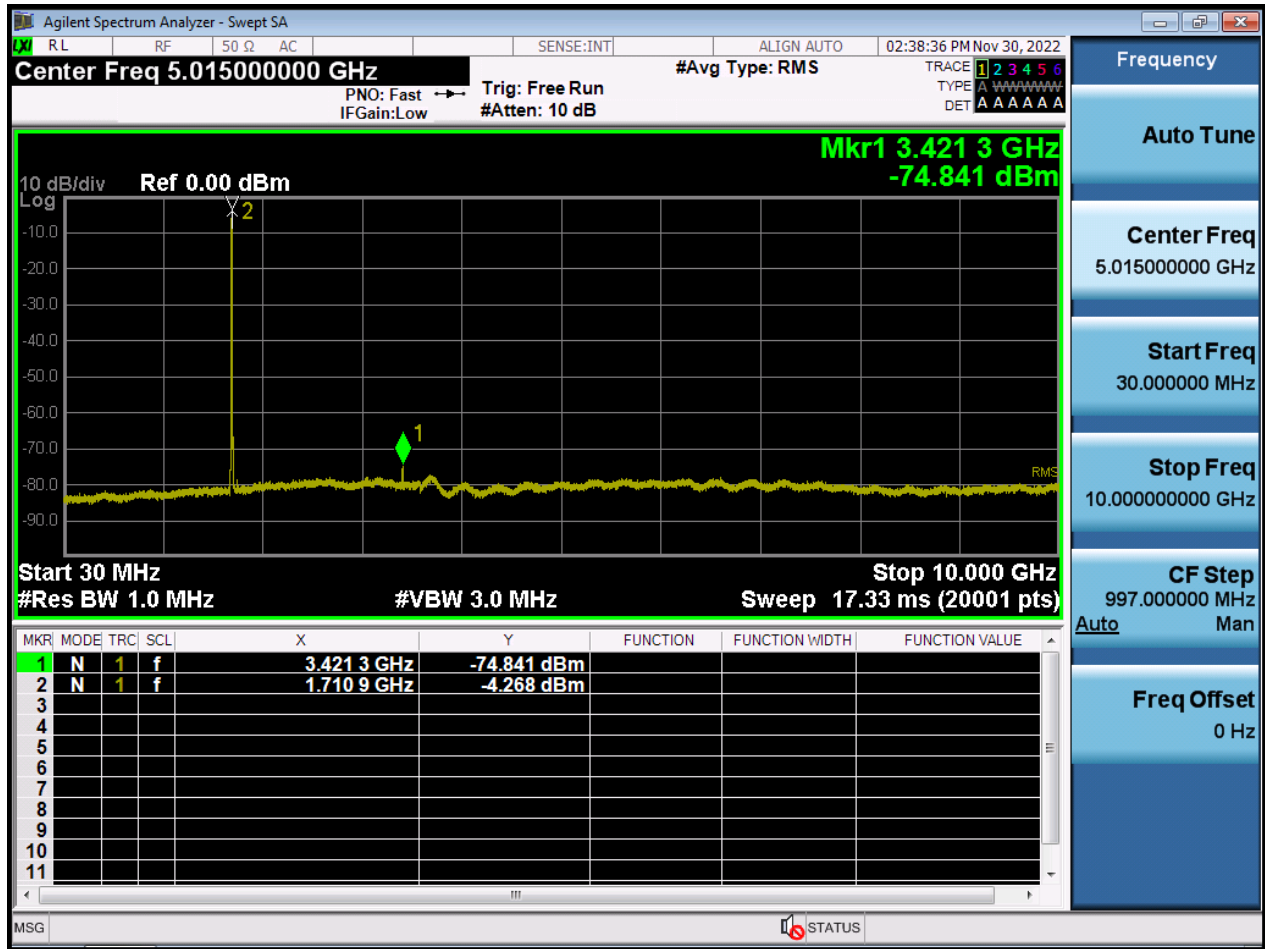


BW3M_CSE(30M-10 G)_Middle Channel_QPSK_1RB

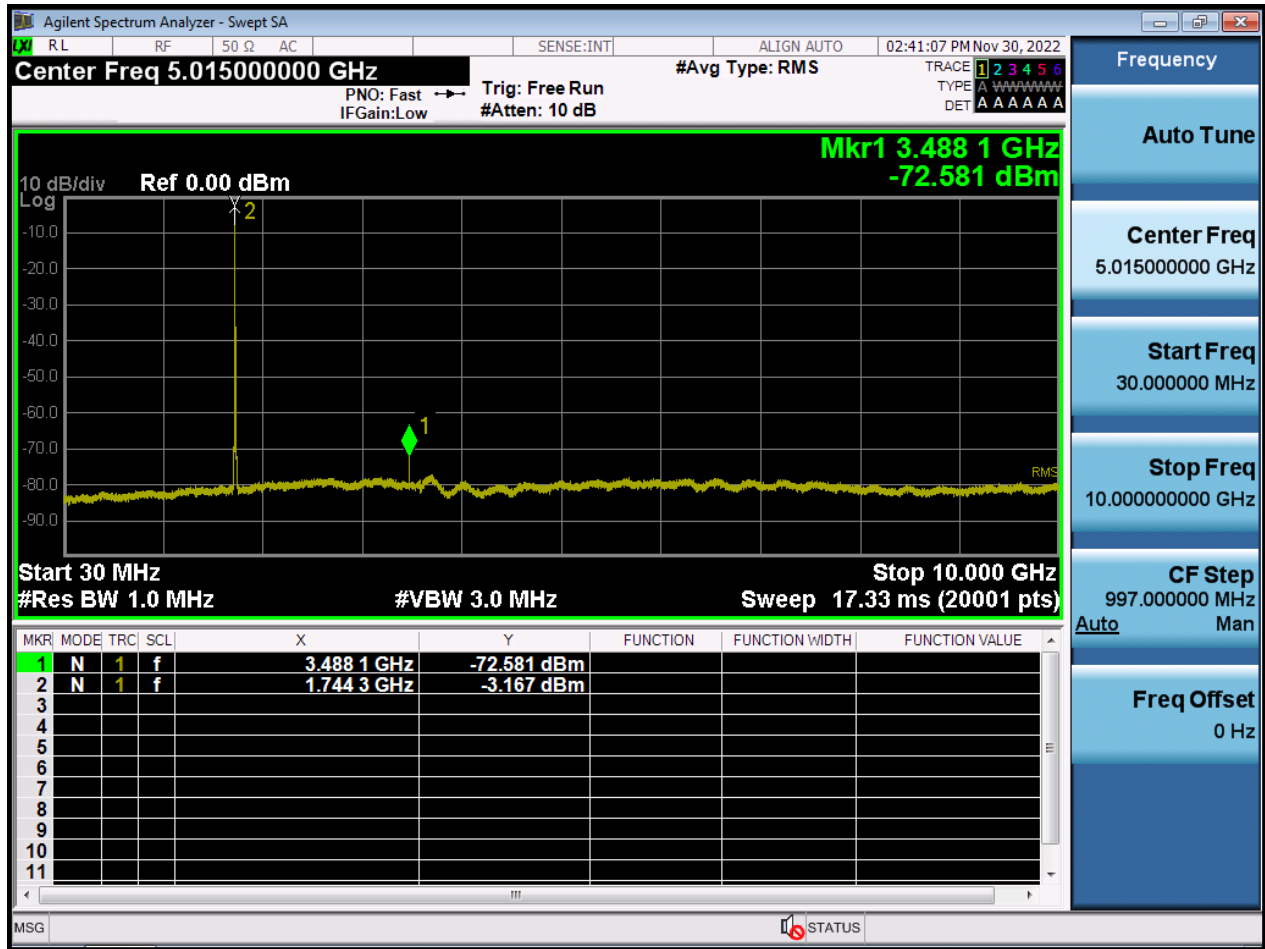


BW3M_CSE(30M-10 G)_Highest Channel_QPSK_1RB

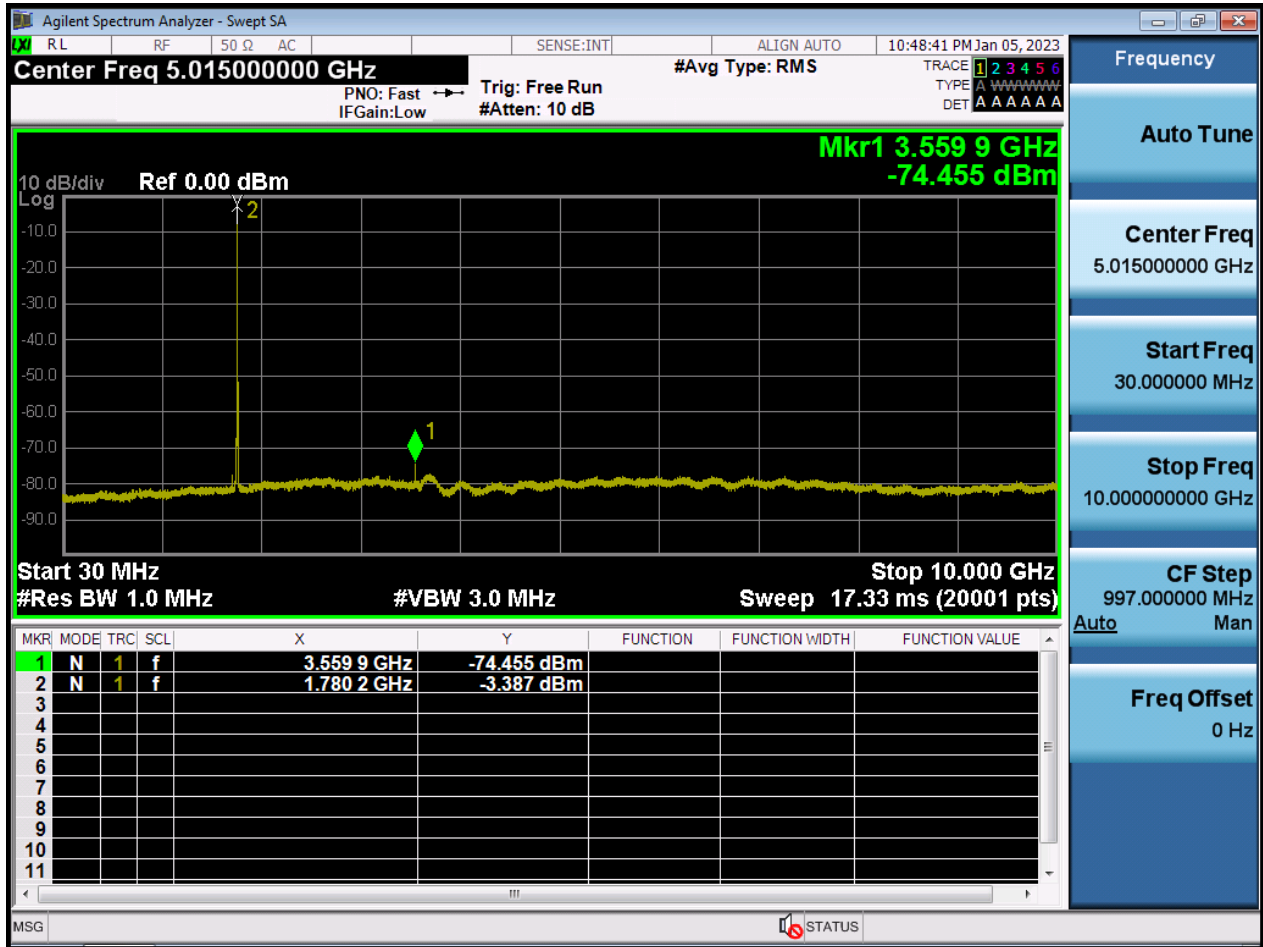


BW5M_CSE(30M-10 G)_Lowest Channel_QPSK_1RB

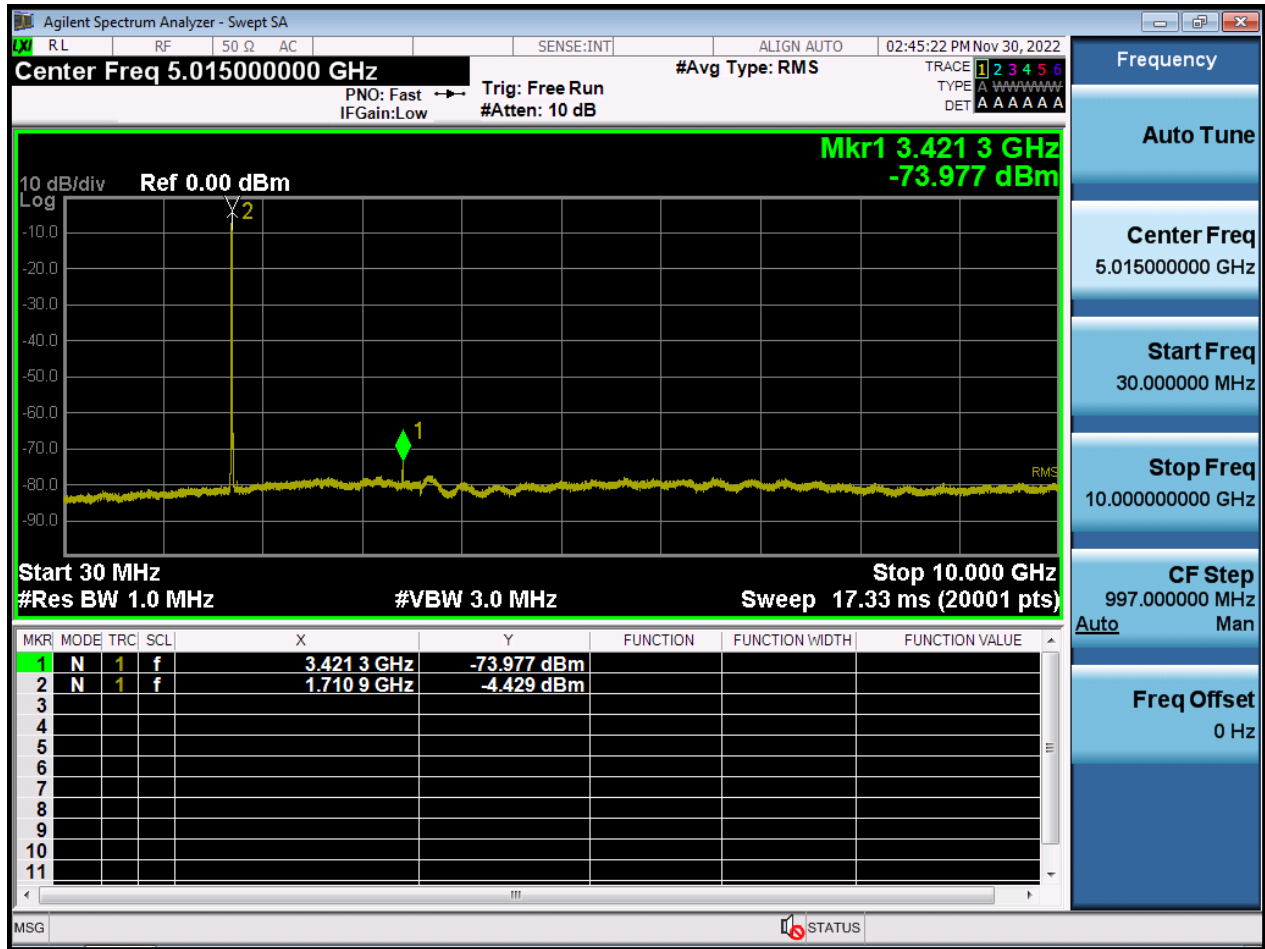


BW5M_CSE(30M-10 G)_Middle Channel_QPSK_1RB

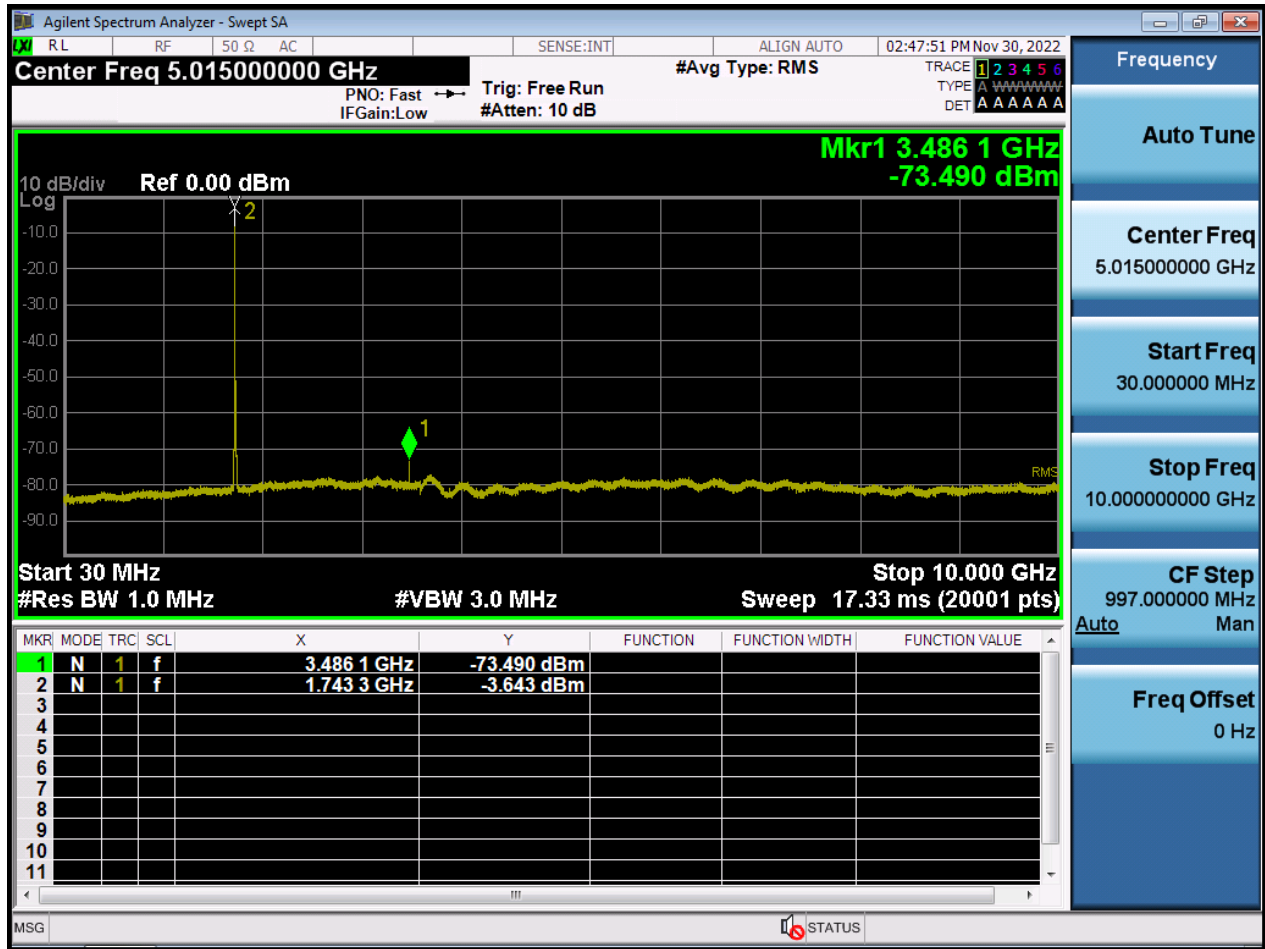

BW5M_CSE(30M-10 G)_Highest Channel_QPSK_1RB

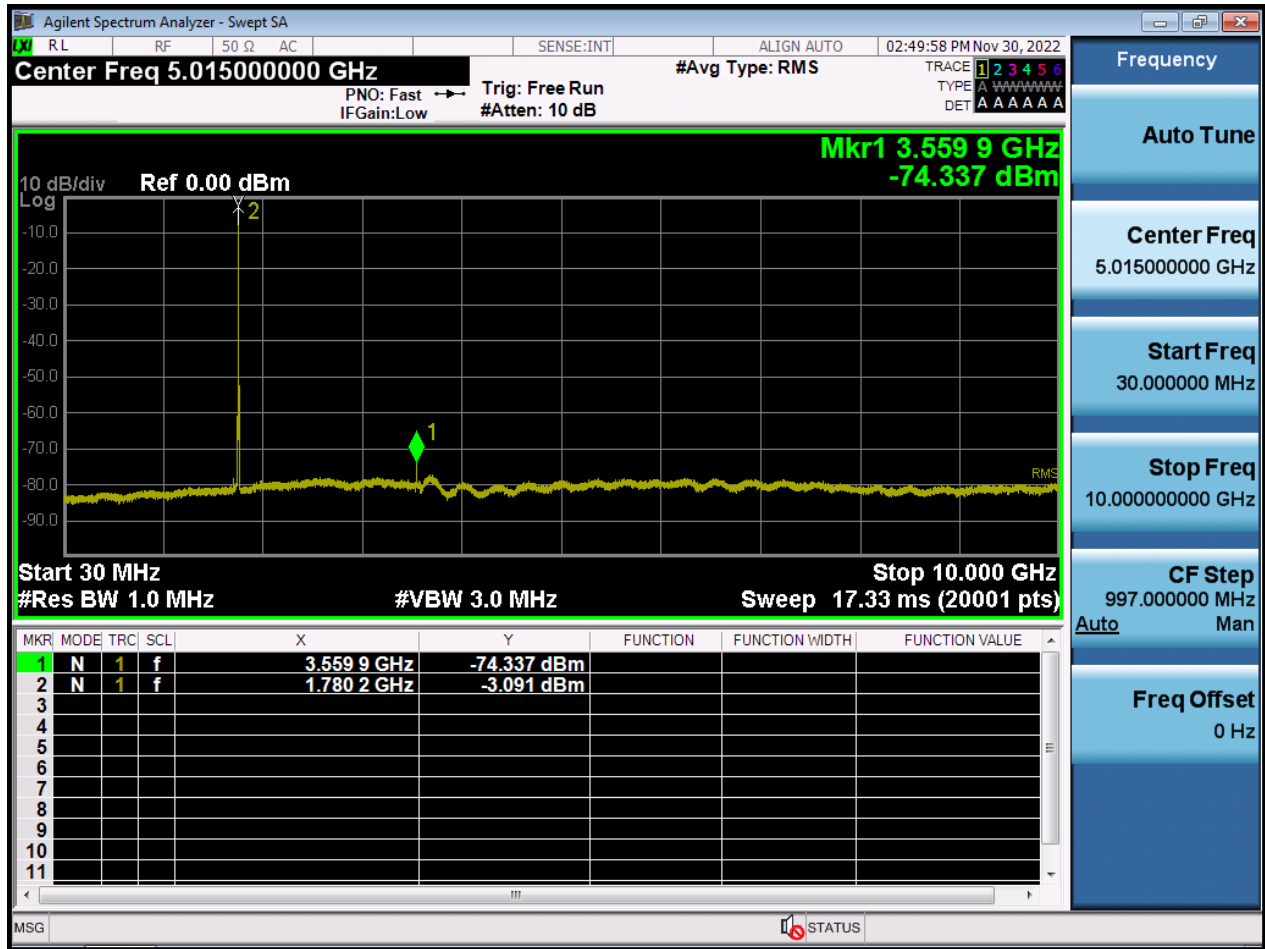

BW10M_CSE(30M-10 G)_Lowest Channel_QPSK_1RB

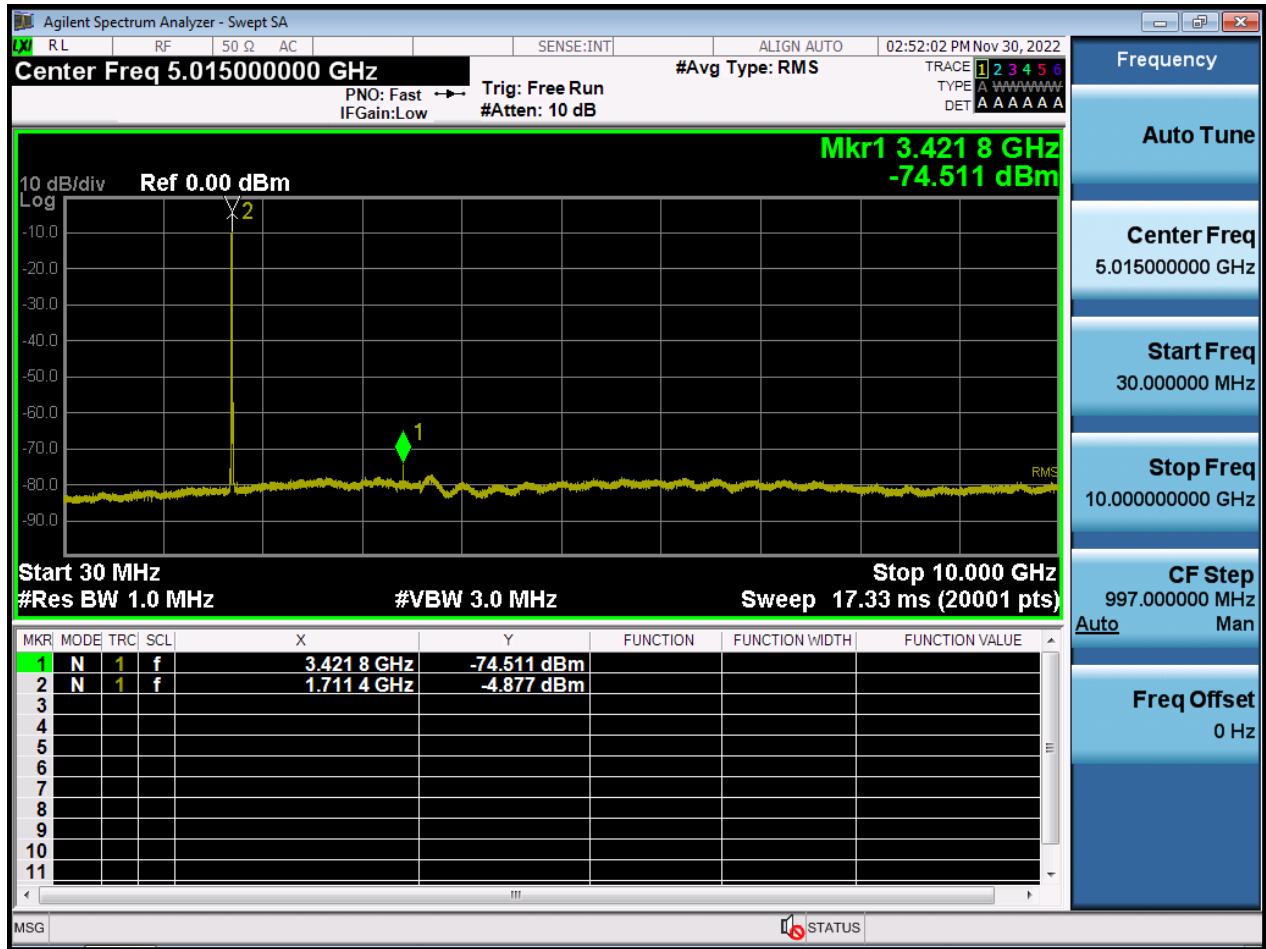

BW10M_CSE(30M-10 G)_Middle Channel_QPSK_1RB

