




BUREAU VERITAS

### [Test Plot of Power Spectral Density]



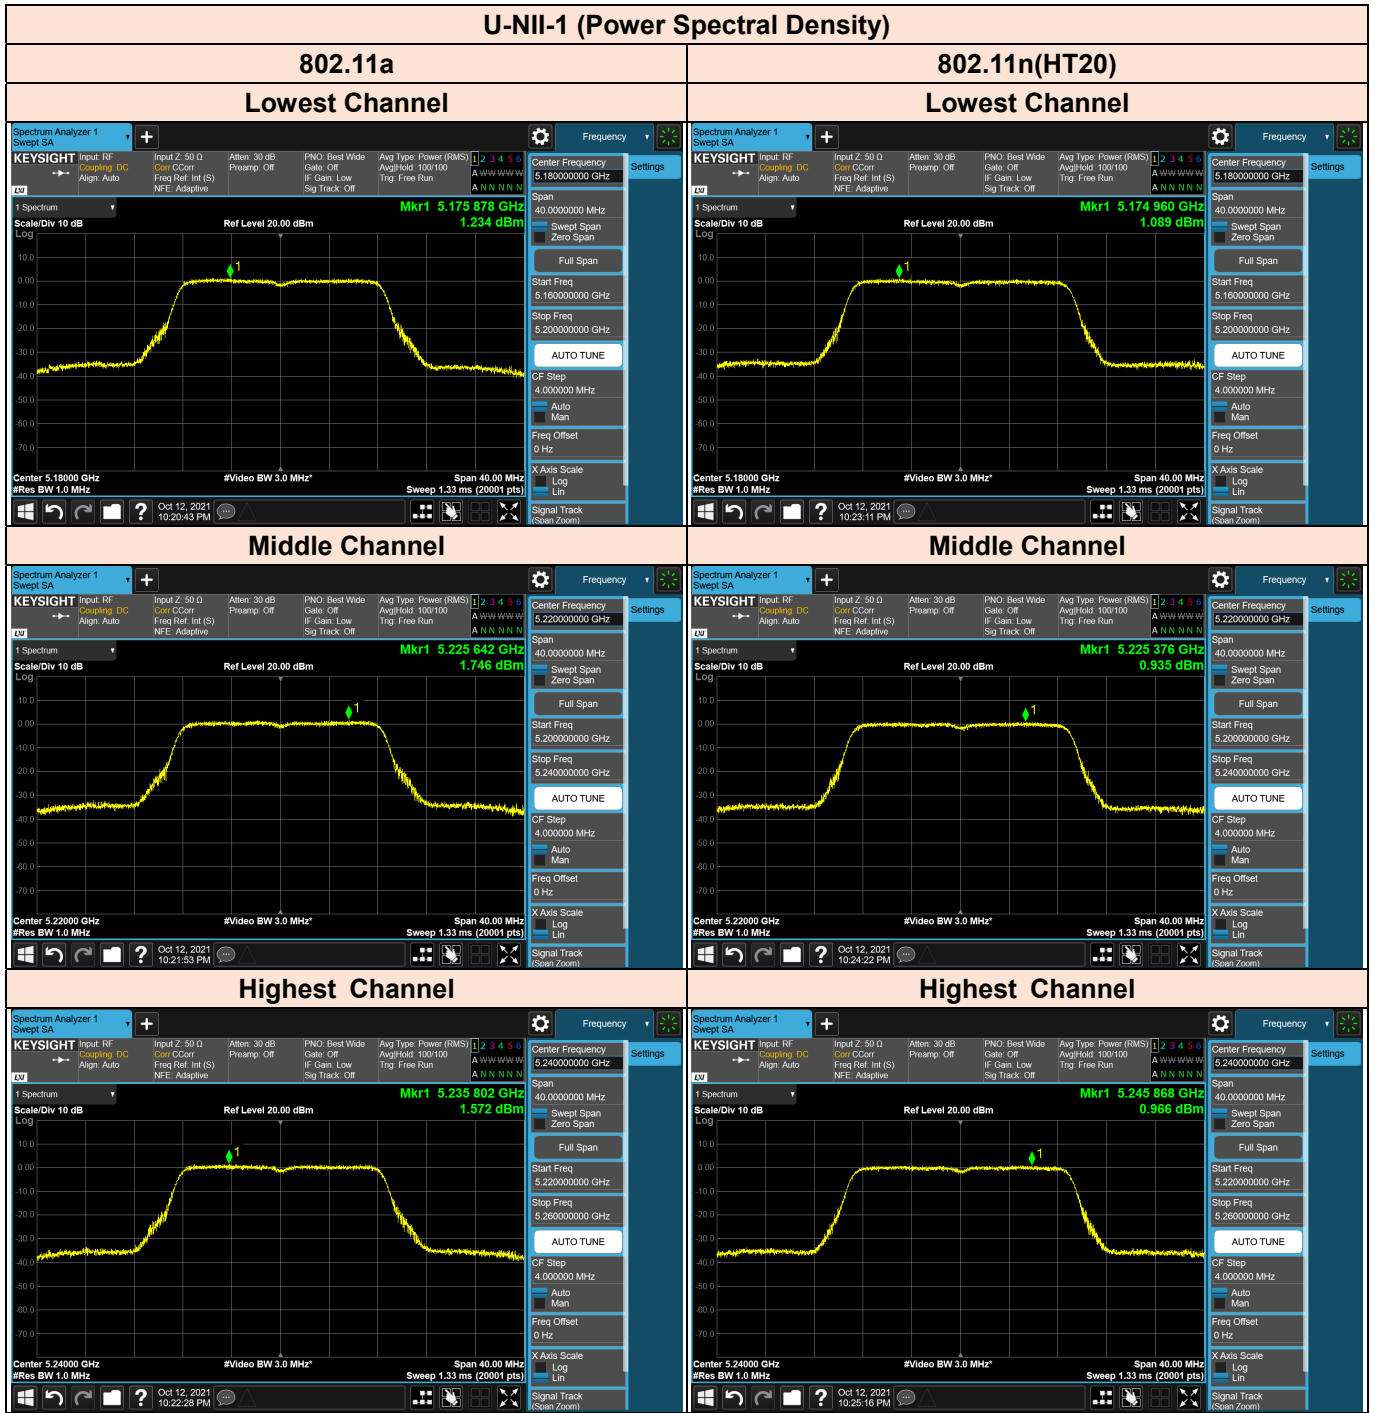


BUREAU VERITAS

### U-NII-2A (Power Spectral Density)


802.11a

Lowest Channel

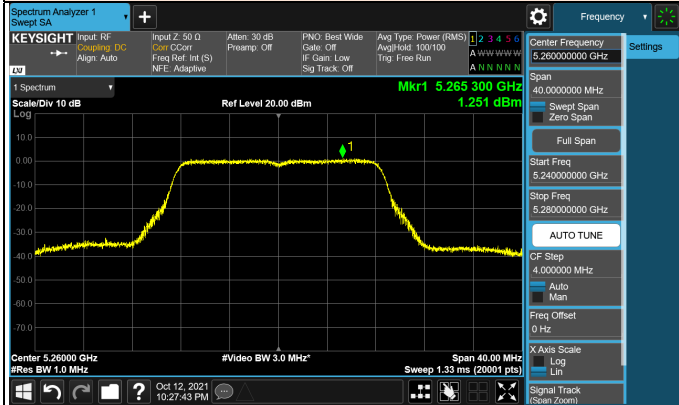


802.11n(HT20)


Lowest Channel

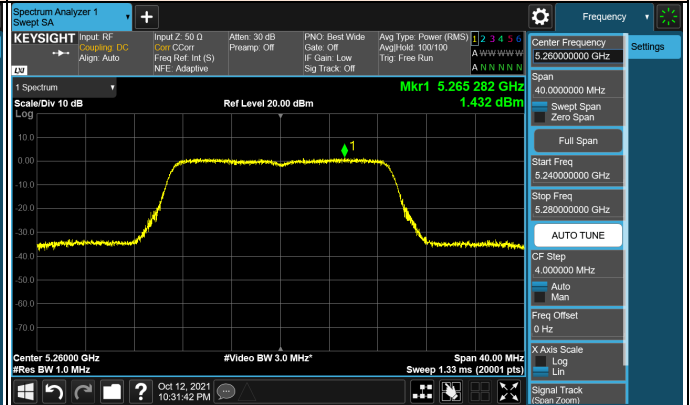


Middle Channel

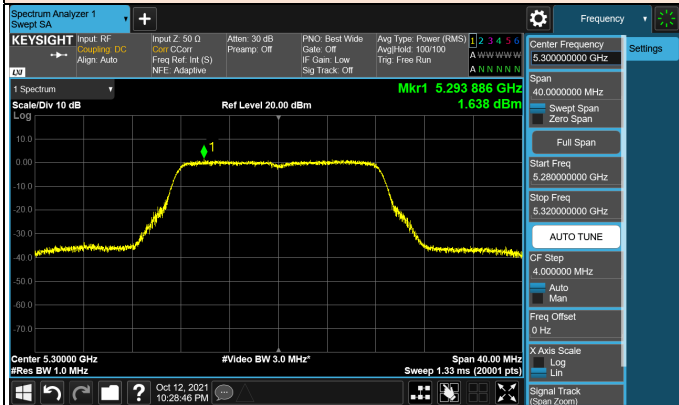


Middle Channel

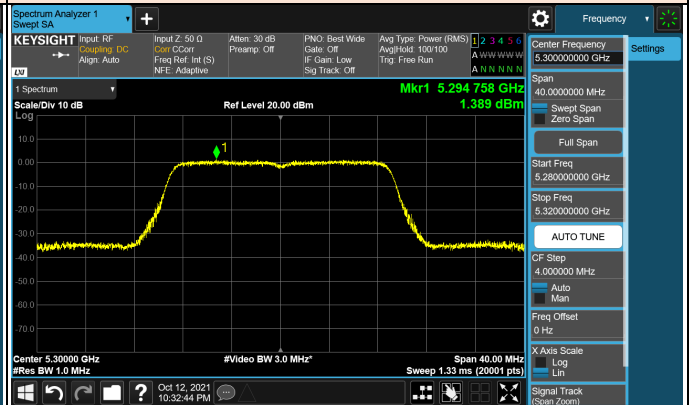

Highest Channel

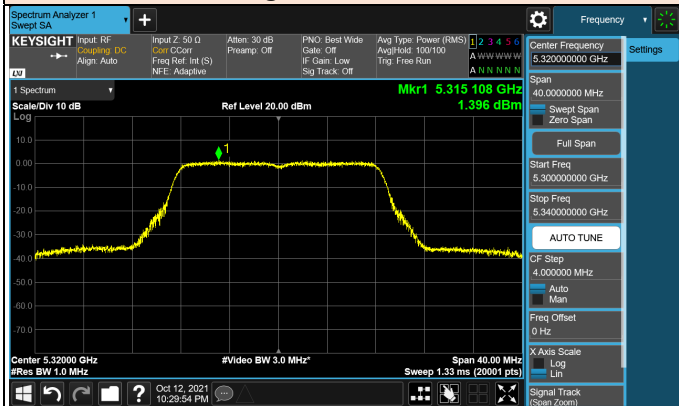

Highest Channel

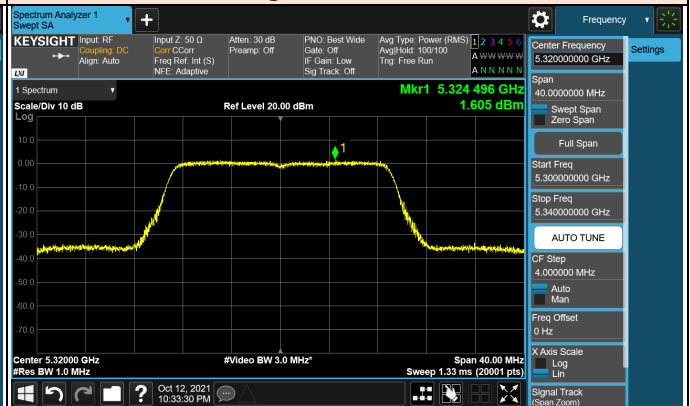




BUREAU VERITAS

### U-NII-2C (Power Spectral Density)


802.11a

Lowest Channel

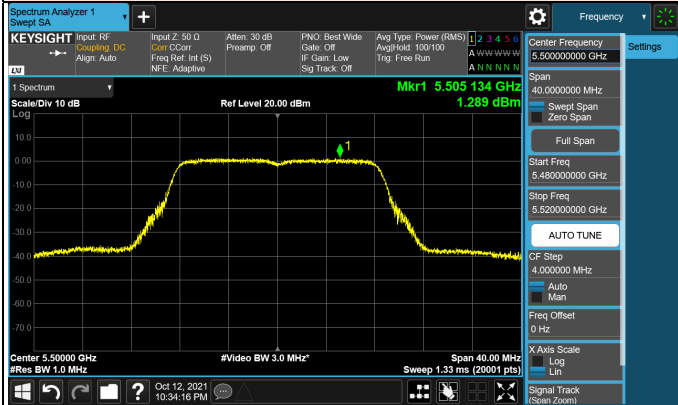


802.11n(HT20)


Lowest Channel

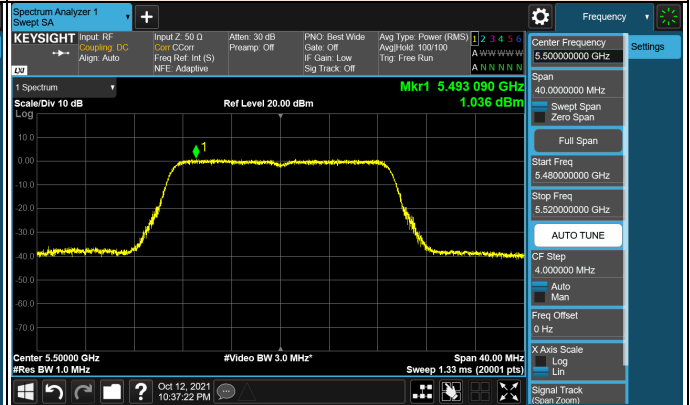


Middle Channel

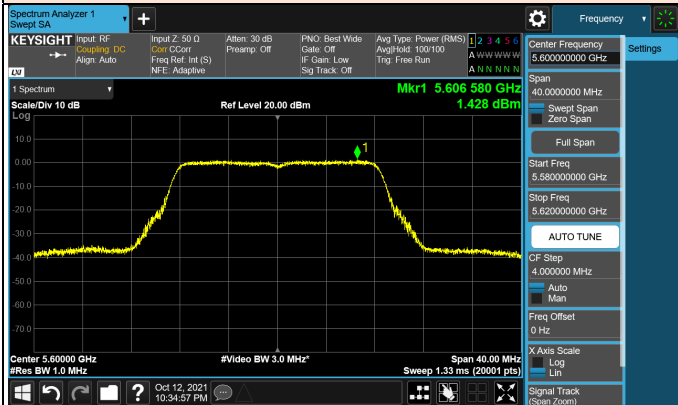


Middle Channel

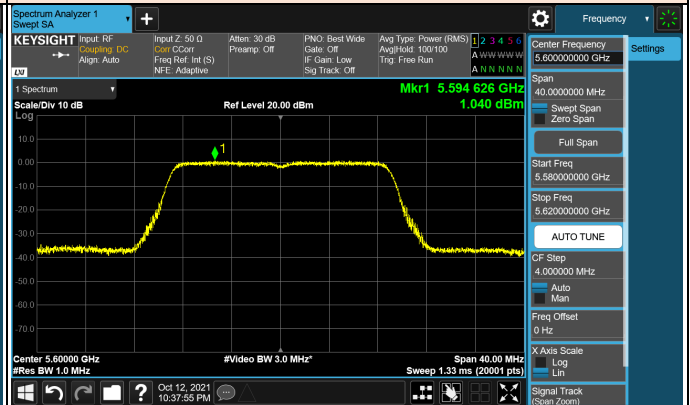

Highest Channel

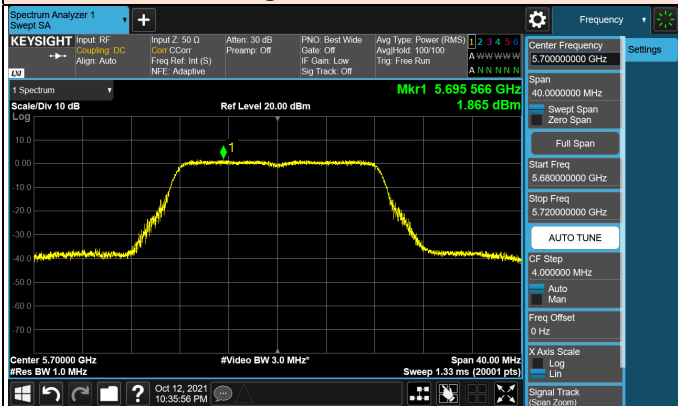

Highest Channel

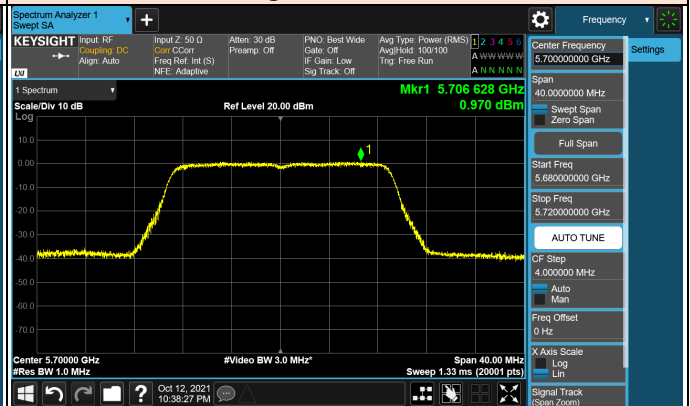




### U-NII-3 (Power Spectral Density)


802.11a

Lowest Channel

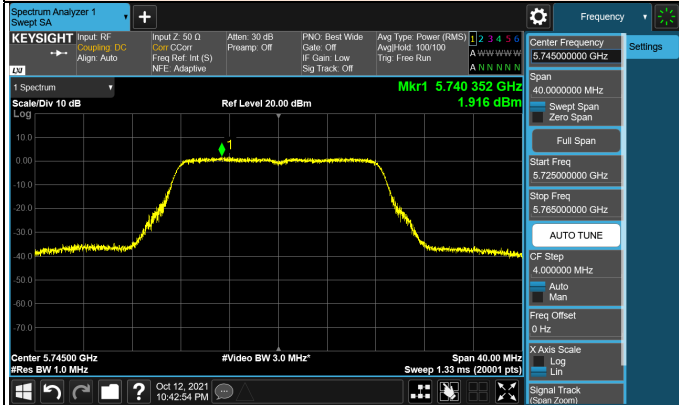


802.11n(HT20)


Lowest Channel

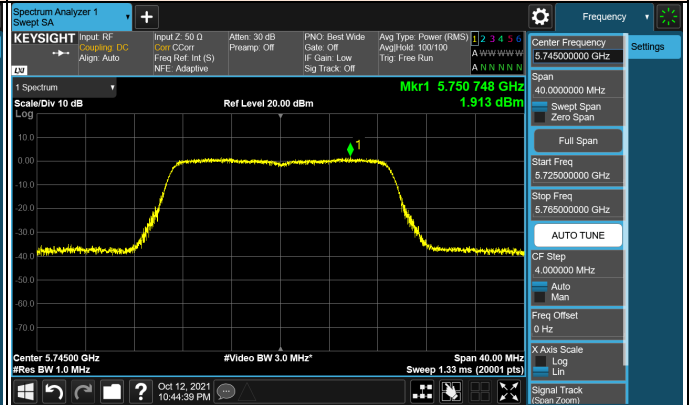


Middle Channel

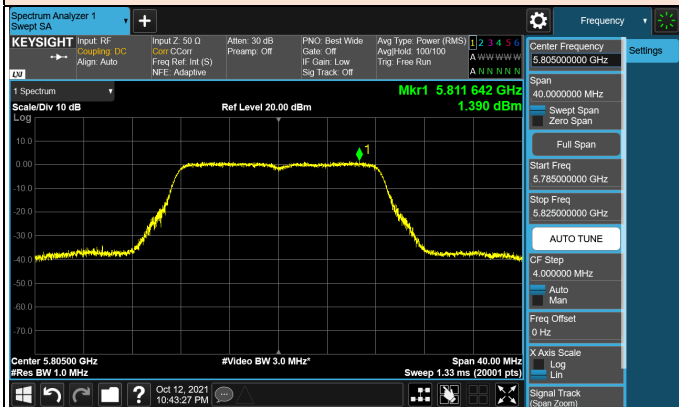


Middle Channel

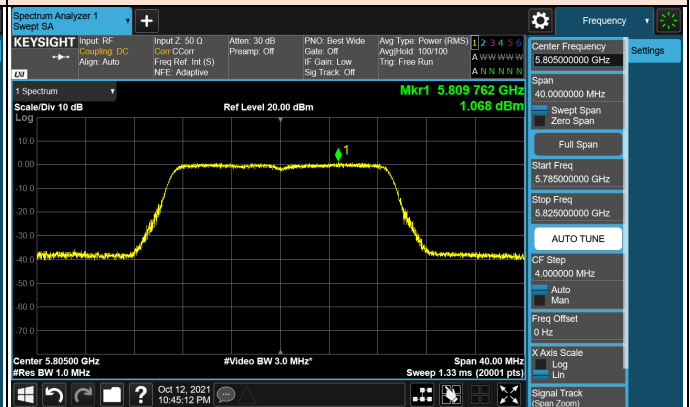

Highest Channel

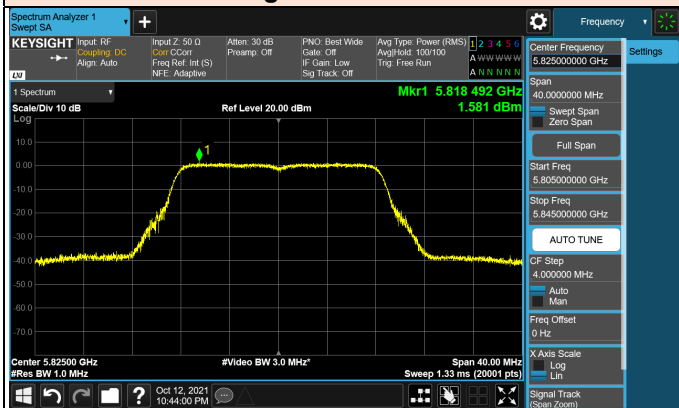

Highest Channel

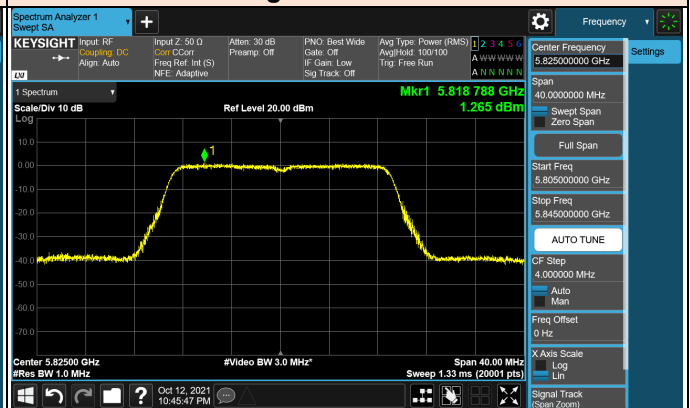






BUREAU  
VERITAS

### U-NII Straddle Channel (Power Spectral Density)

802.11a

802.11n(HT20)

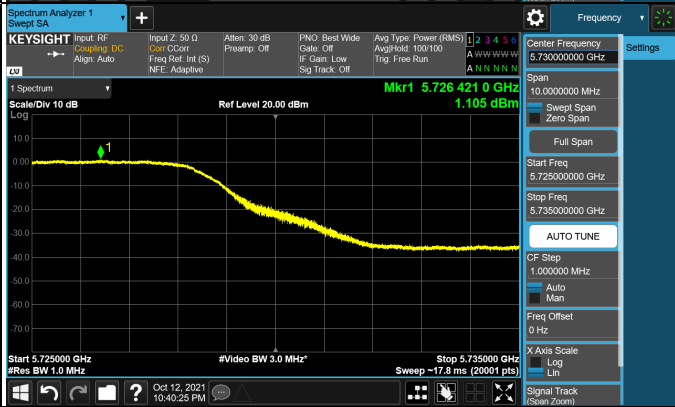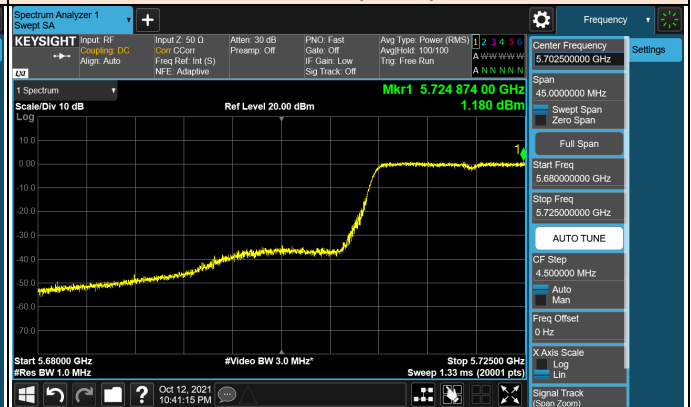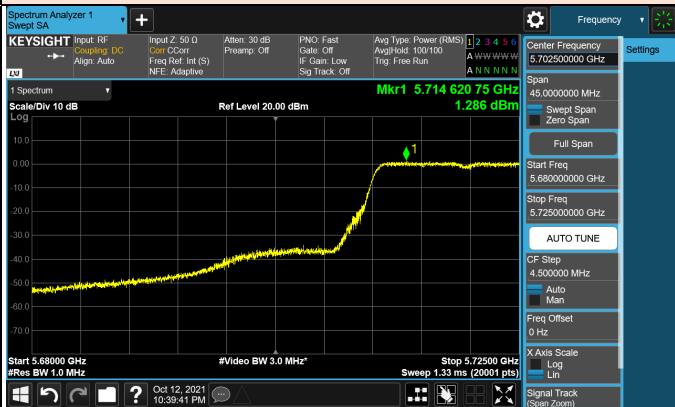

### 3.5 Spurious Emission, Band edge and Restricted Bands

#### 3.5.1 Regulation

§15.407(b) : Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
  - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
  - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

§15.209(a) : Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.



§15.205(a) : Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

§15.205 (b) : Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

### 3.5.2 Test Procedure

#### Primary method

The procedure for method AD is as follows:

- a) RBW = 1 MHz.
- b) VBW  $\geq$  [3  $\times$  RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)]  $\leq$  RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
  - 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is [20 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
  - 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.



### **Procedure for unwanted emissions measurements below 1 000 MHz**

The procedure for unwanted emissions measurements below 1 000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Compliance shall be determined using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

### **Procedure for unwanted emissions measurements above 1 000 MHz**

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

- a) Follow the requirements in 12.7.4.
- b) Peak emission levels are measured by setting the instrument as follows:
  - 1) RBW = 1 MHz.
  - 2) VBW  $\geq$  [3  $\times$  RBW].
  - 3) Detector = peak
  - 4) Sweep time = auto.
  - 5) Trace mode = max hold.
  - 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately 1 / D, where D is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.

### **Average Measurement Method above 1GHz (Method AD)**

- 1) Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2) RBW = 1 MHz
- 3) VBW = 3 MHz
- 4) Detector = power average (RMS)
- 5) Number of measurement points = Number of points must be  $\geq 2 \times \text{span} / \text{RBW}$
- 6) Averaging type = power (RMS)
- 7) Sweep time = auto couple
- 8) Trace was averaged over 100 sweeps

### **Peak Measurement Method above 1GHz**

- 1) Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2) RBW = 1 MHz
- 3) VBW = 3 MHz
- 4) Detector = Peak
- 5) Sweep time = auto couple
- 6) Trace mode = max hold
- 7) Trace was allowed to stabilize

### **Peak Measurement Method below 1GHz**

- 1) Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2) Span was set greater than 1 MHz
- 3) RBW = 120 kHz
- 4) Detector = CISPR Quasi-peak
- 5) Sweep time = auto couple


### **- Sample Calculation**

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m] + Duty Cycle Correction [dB]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable loss [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]


### **3.5.3 Deviation from Test Standard**

No deviation.



### 3.5.4 Test Setup

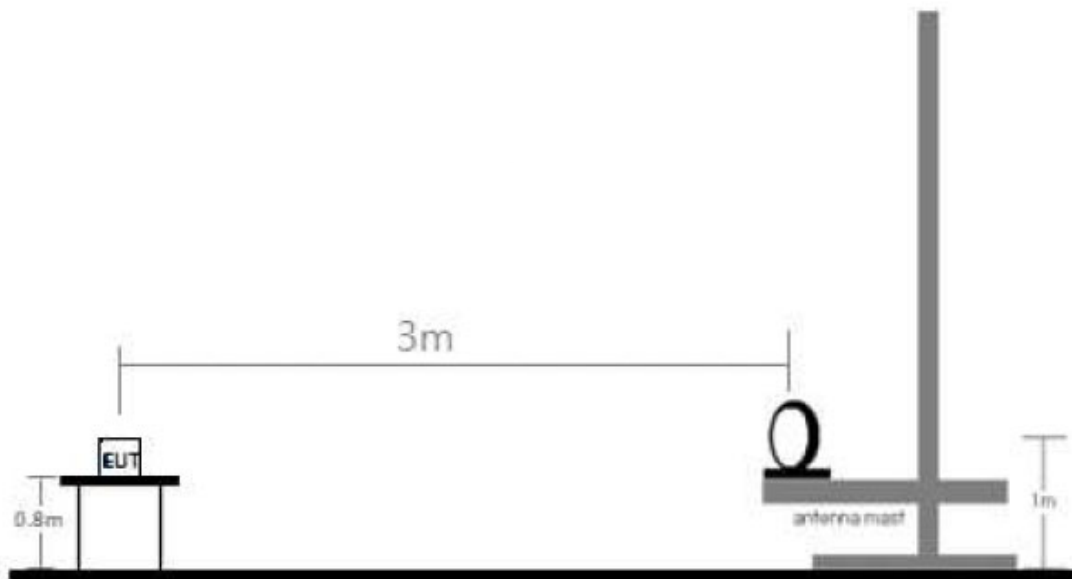

**[Radiated Emission Test Setup Below 30 MHz]**

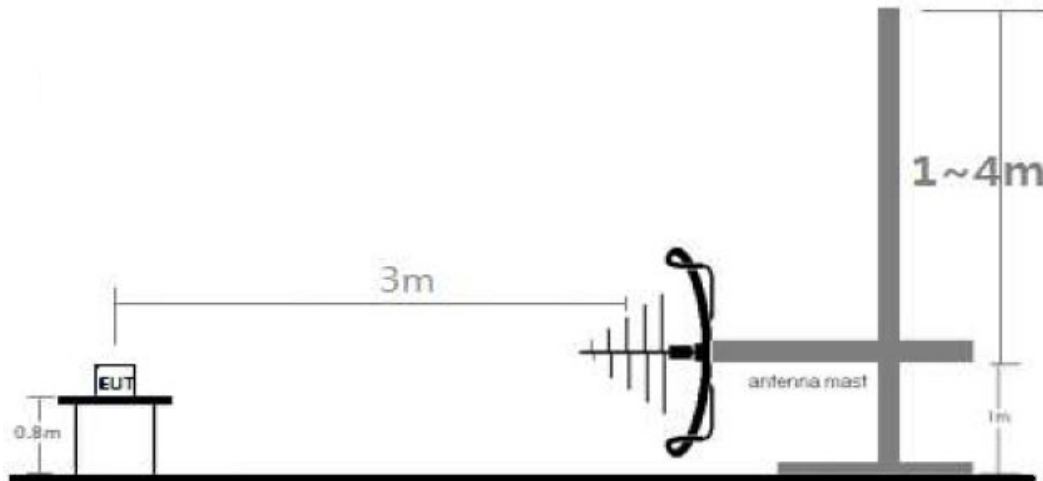

**[Radiated Emission Test Setup Below 1 GHz]**

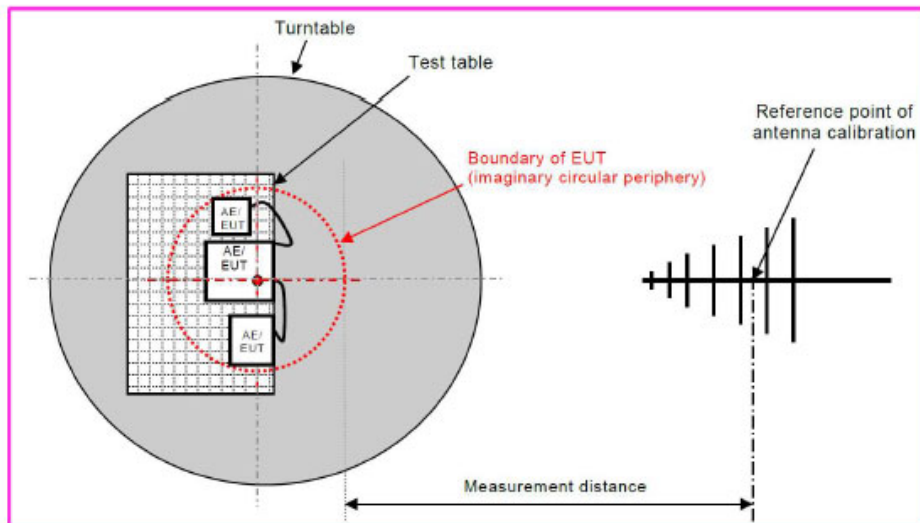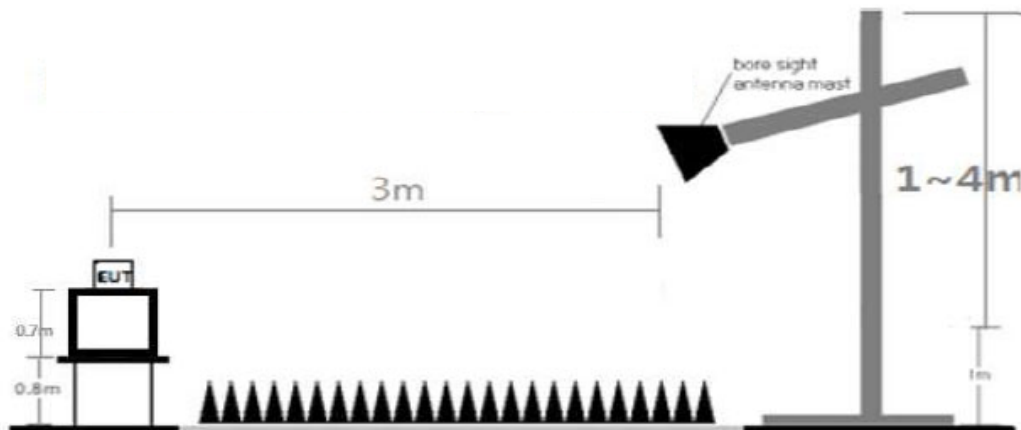


**[Radiated Emission Test Setup Above 1 GHz]**



### 3.5.5 Test Result

#### 3.5.5.1 Radiated Emissions (Below 30 MHz)

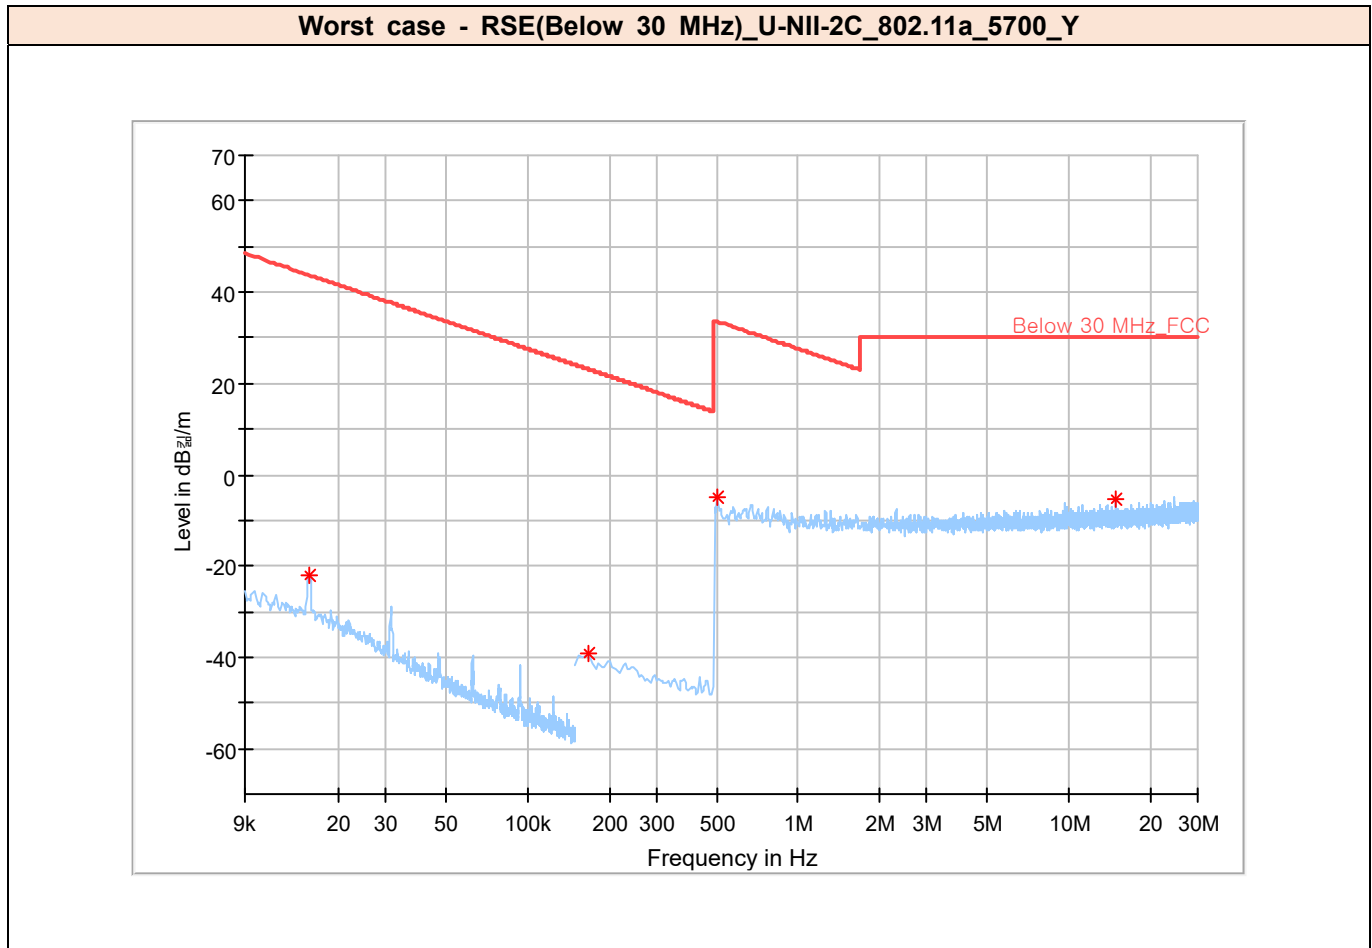

Frequency [MHz]	Peak Reading Value [dB $\mu$ V]	Peak [dB $\mu$ V/m]	Distance Correction Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB/m]
0.02	37.34	-22.16	-80.00	43.67	65.83	100.00	Perpendicular	289.00	-59.50
0.17	20.10	-39.30	-80.00	23.06	62.36	100.00	Perpendicular	5.00	-59.40
0.50	14.19	-5.11	-40.00	33.63	38.74	100.00	Perpendicular	321.00	-19.30
15.04	12.21	-5.29	-40.00	30.00	35.29	100.00	Perpendicular	279.00	-17.50


Frequency [MHz]	Peak Reading Value [dB $\mu$ A]	Peak [dB $\mu$ A/m]	Distance Correction Factor [dB]	Limit [dB $\mu$ A/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB/m]
0.02	-14.16	-73.66	-80.00	-7.83	65.83	100.00	Perpendicular	289.00	-59.50
0.17	-31.40	-90.80	-80.00	-28.44	62.36	100.00	Perpendicular	5.00	-59.40
0.50	-37.31	-56.61	-40.00	-17.87	38.74	100.00	Perpendicular	321.00	-19.30
15.04	-39.29	-56.79	-40.00	-21.50	35.29	100.00	Perpendicular	279.00	-17.50

**Remarks**

1. Peak(dB $\mu$ V/m) = Peak Reading Value(dB $\mu$ V/m) + Correction Factor(dB) + Distance Factor(dB)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Peak) Result (dB $\mu$ V/m) – (Peak) Limit (dB $\mu$ V/m)

### 3.5.5.2 Radiated Emissions (Below 1 GHz)

**Worst case - RSE(Below 1 GHz)\_U-NII-2C\_802.11a\_5700**

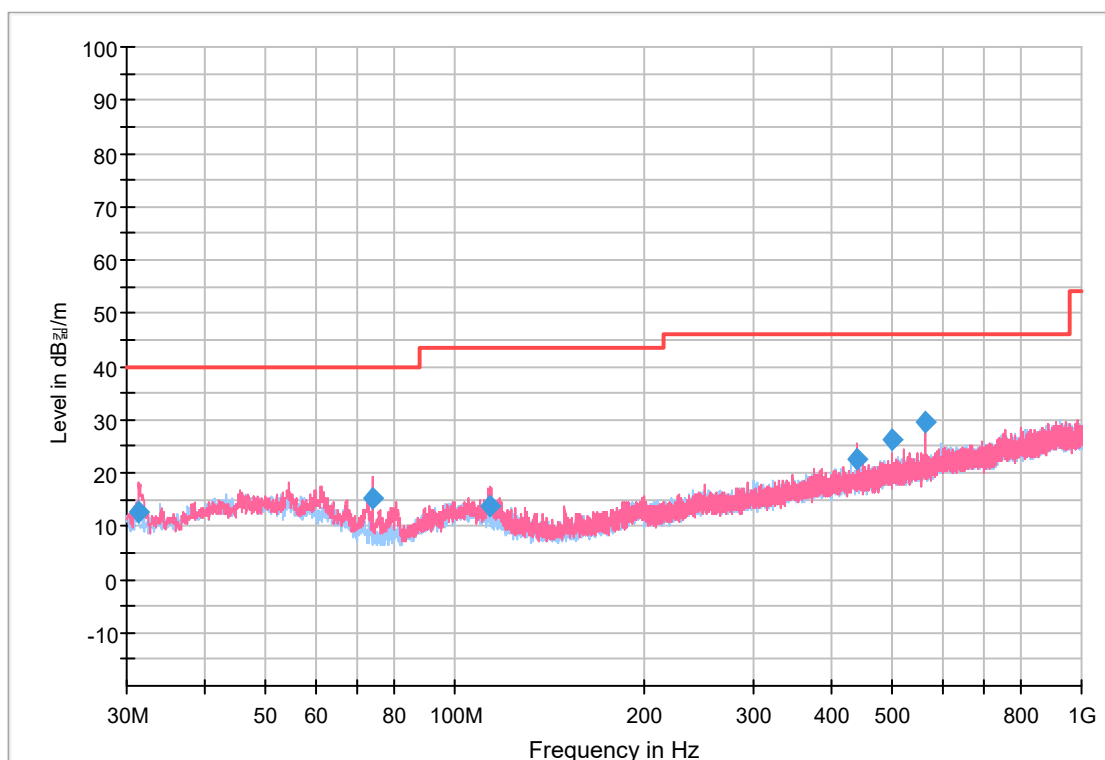


Frequency [MHz]	Quasi Reading Value [dBµV]	Quasi Peak [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Pol	Azimuth [deg]	Correction Factor [dB/m]
31.36	34.84	12.84	40.00	27.16	136	V	8	-22.00
74.14	40.40	15.30	40.00	24.70	136	V	340	-25.10
113.52	35.36	13.66	43.52	29.86	100	V	39	-21.70
437.50	37.01	22.61	46.02	23.41	254	V	113	-14.40
500.01	39.37	26.07	46.02	19.95	110	H	240	-13.30
562.53	41.80	29.50	46.02	16.52	100	V	145	-12.30

#### Remarks

1. Quasi Peak(dBµV/m) = Quasi Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin(dB) = (Quasi Peak) Result (dBµV/m) – (Quasi Peak) Limit (dBµV/m)



### 3.5.5.3 Radiated Emissions (Above 1 GHz)

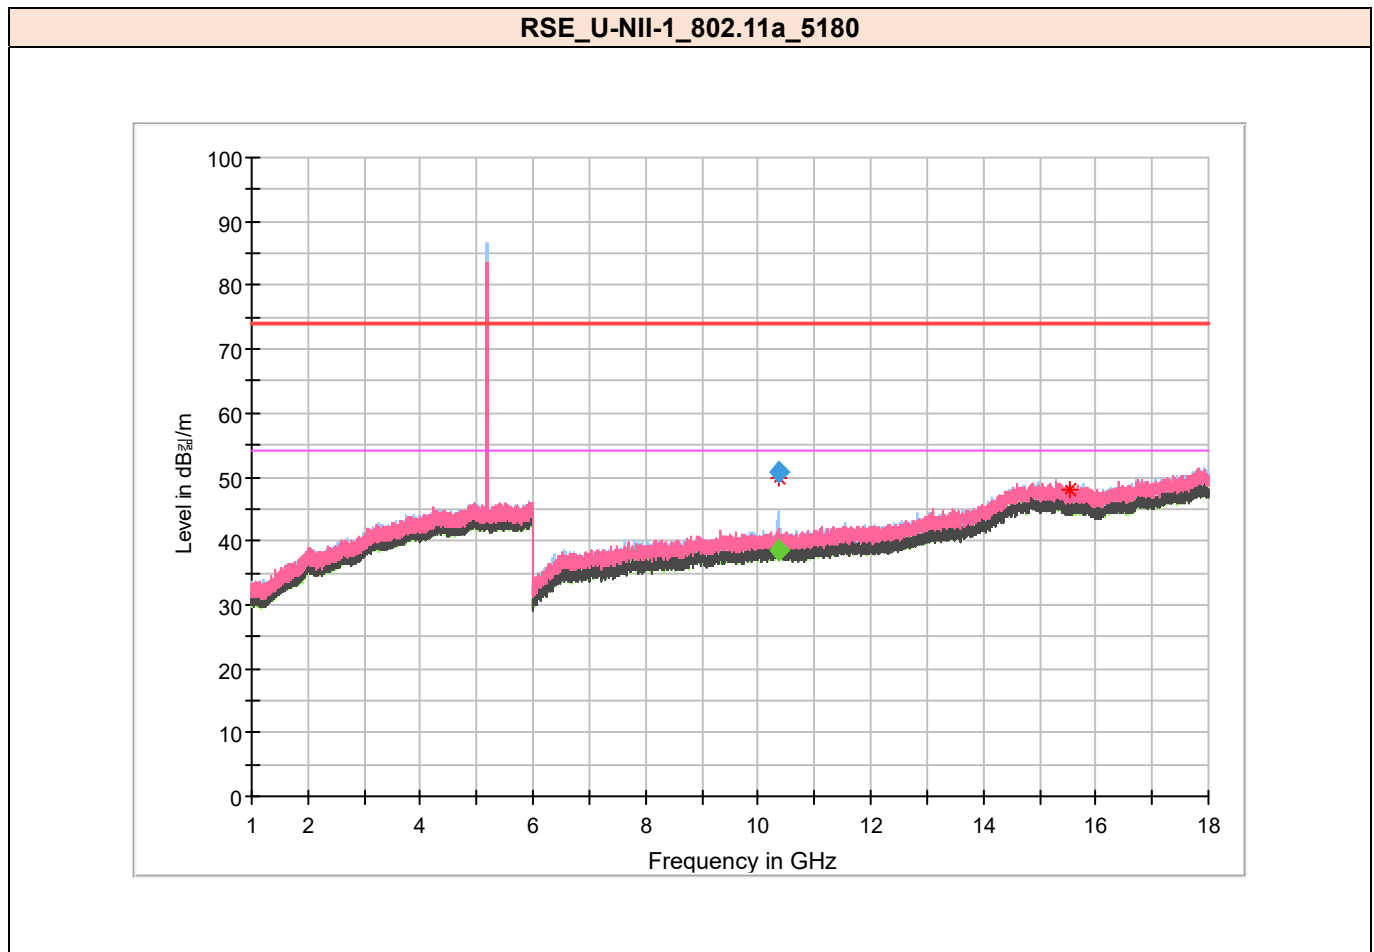


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
10 362.00	39.09	50.89	---	---	---	250	H	221	11.80	17.31	68.20	---	---
10 362.00	---	---	26.59	38.70	0.31	250	H	221	11.80	---	---	15.30	54.00
15 541.50	28.18	48.08	---	---	---	300	H	31	19.90	25.92	74.00	---	---

#### Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



RSE\_U-NII-1\_802.11a\_5220

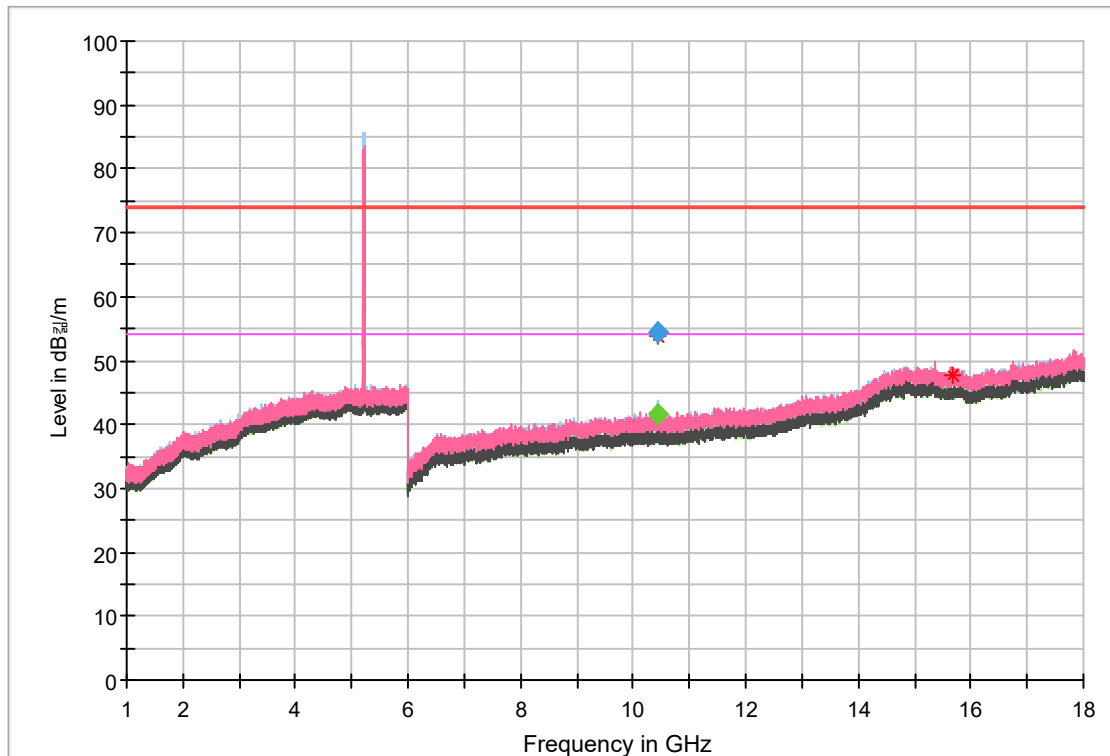

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
10 438.88	42.42	54.42	---	---	---	212	H	195	12.00	13.78	68.20	---	---
10 438.88	---	---	29.57	41.88	0.31	212	H	195	12.00	---	---	12.12	54.00
15 660.38	27.58	47.58	---	---	---	200	V	225	20.00	26.42	74.00	---	---


Remarks

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.





**RSE\_U-NII-1\_802.11a\_5240**

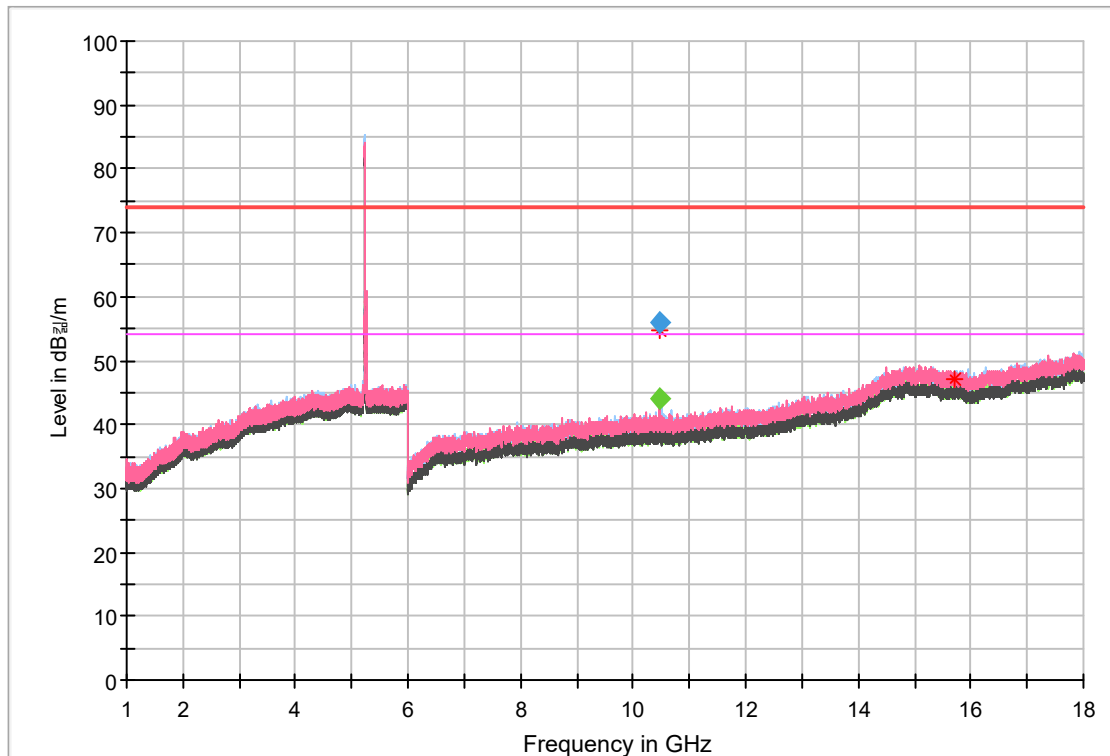


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
10 478.25	43.92	56.02	---	---	---	215	H	202	12.10	12.18	68.20	---	---
10 478.25	---	---	31.79	44.20	0.31	215	H	202	12.10	---	---	9.80	54.00
15 720.00	27.07	47.17	---	---	---	200	V	93	20.10	26.83	74.00	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2A\_802.11a\_5260**

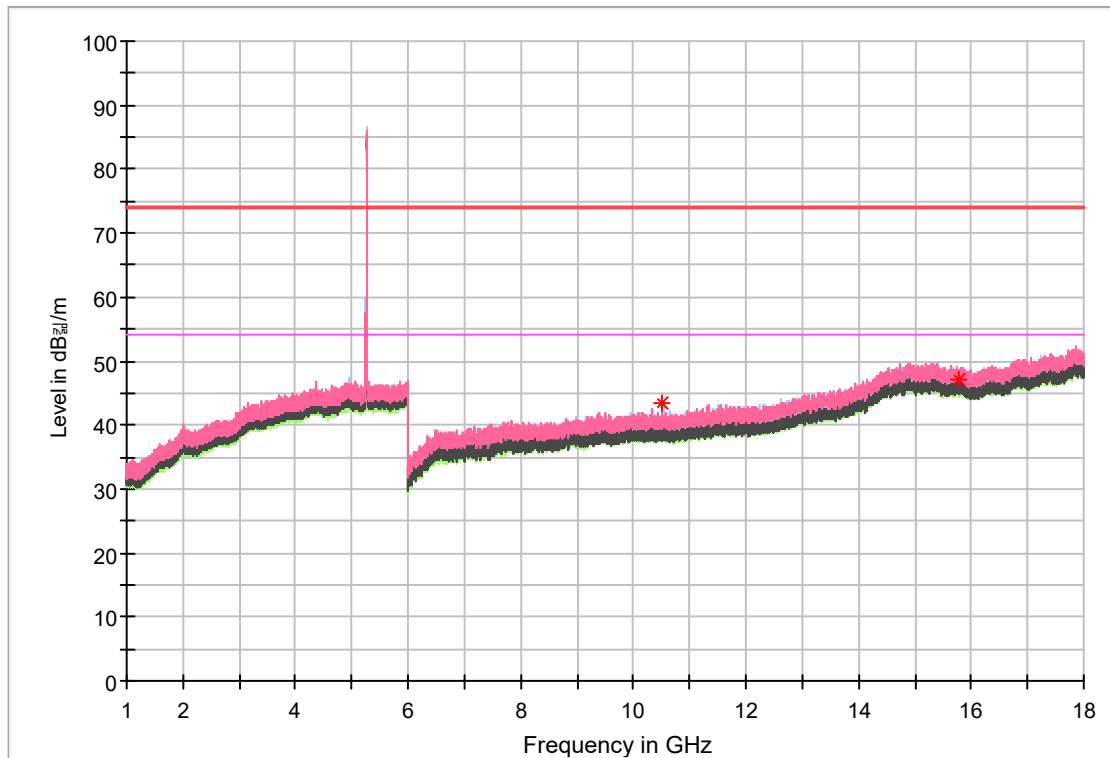


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
10 521.75	31.19	43.39	---	---	---	200	H	211	12.20	24.81	68.20	---	---
15 780.00	27.09	47.19	---	---	---	300	H	108	20.10	26.81	74.00	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2A\_802.11a\_5300**

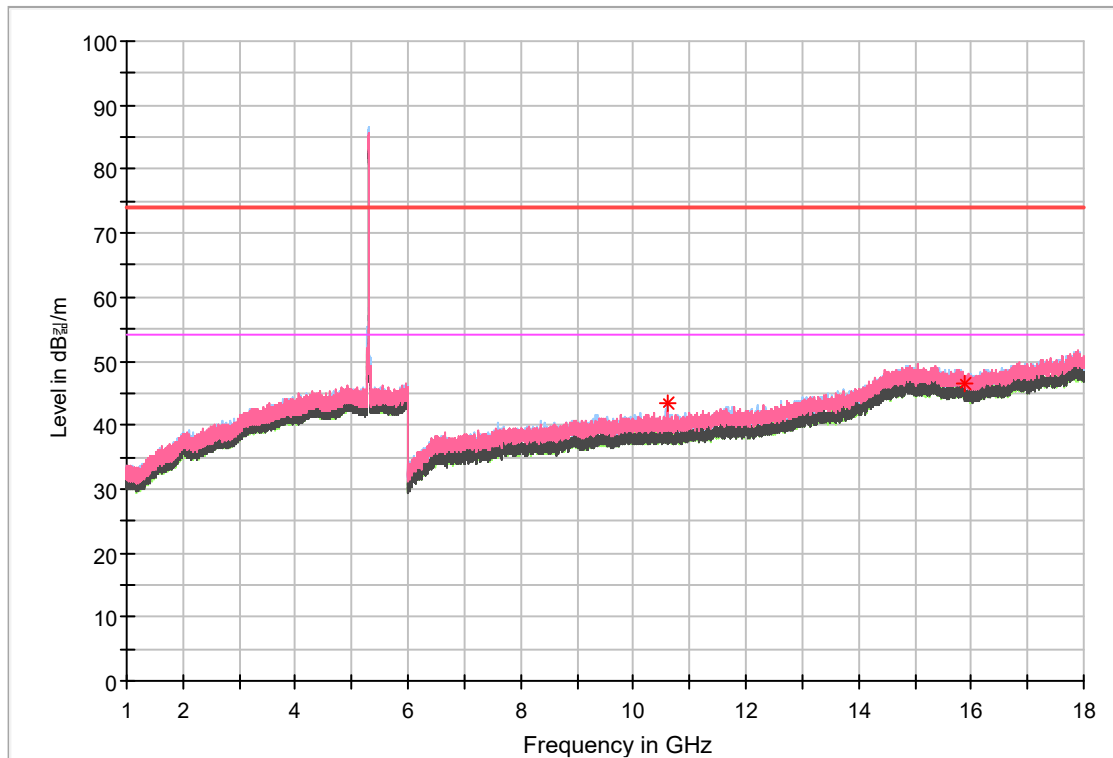


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
10 600.13	31.06	43.36	---	---	---	200	H	209	12.30	30.64	74.00	---	---
15 900.38	26.46	46.56	---	---	---	200	V	272	20.10	27.44	74.00	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2A\_802.11a\_5320**

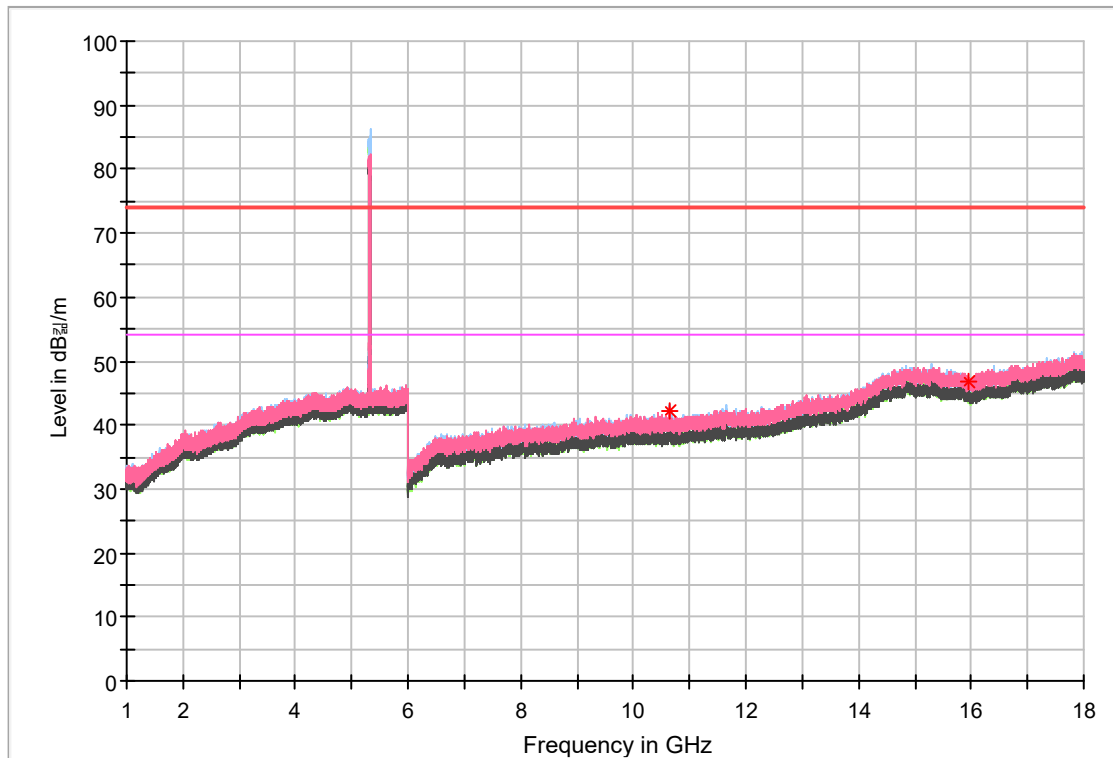


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
10 639.88	29.88	42.18	---	---	---	300	H	217	12.30	31.82	74.00	---	---
15 960.00	26.80	46.80	---	---	---	200	H	129	20.00	27.20	74.00	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



RSE\_U-NII-2C\_802.11a\_5500

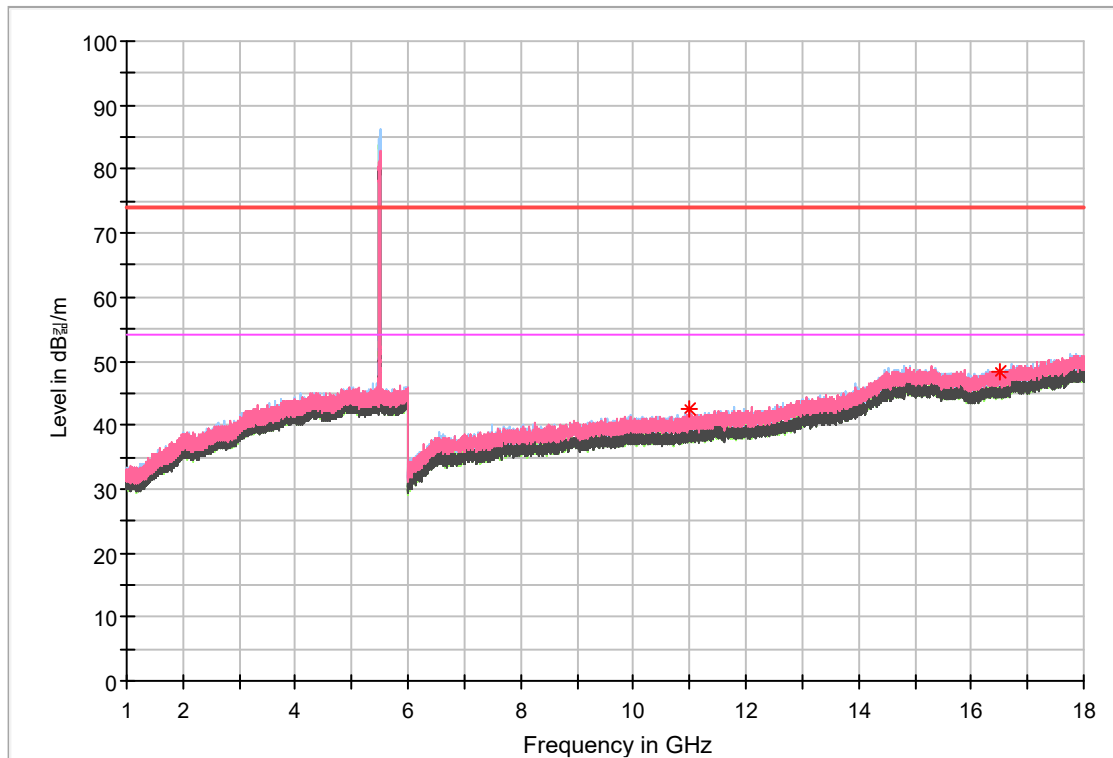


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
11 001.00	29.72	42.62	---	---	---	300	V	151	12.90	31.38	74.00	---	---
16 498.88	27.56	48.36	---	---	---	300	V	317	20.80	19.84	68.20	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2C\_802.11a\_5600**

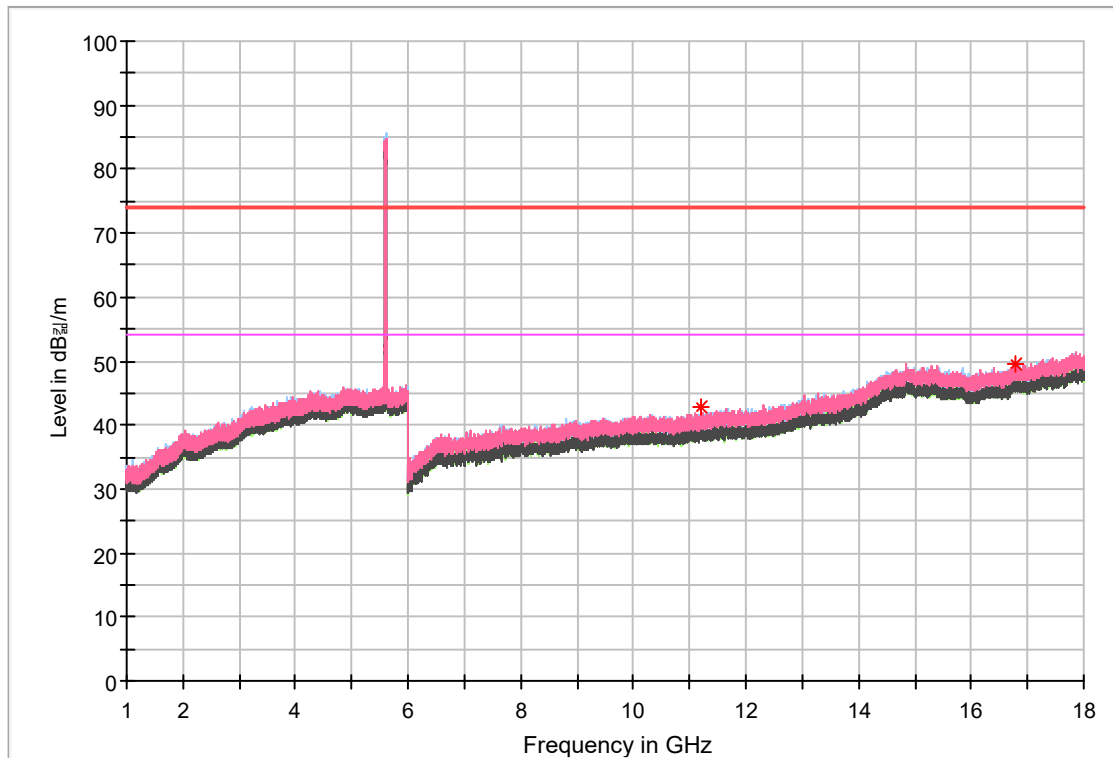


Frequency [MHz]	Peak Reading Value [dBuV]	Peak Result [dBuV/m]	AVG Reading Value [dBuV]	AVG Result [dBuV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBuV/m]	AVG Margin [dB]	AVG Limit [dBuV/m]
11 197.50	29.60	42.70	---	---	---	200	H	213	13.10	31.30	74.00	---	---
16 796.25	28.20	49.60	---	---	---	200	V	0	21.40	18.60	68.20	---	---

**Remarks**

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2C\_802.11a\_5700**

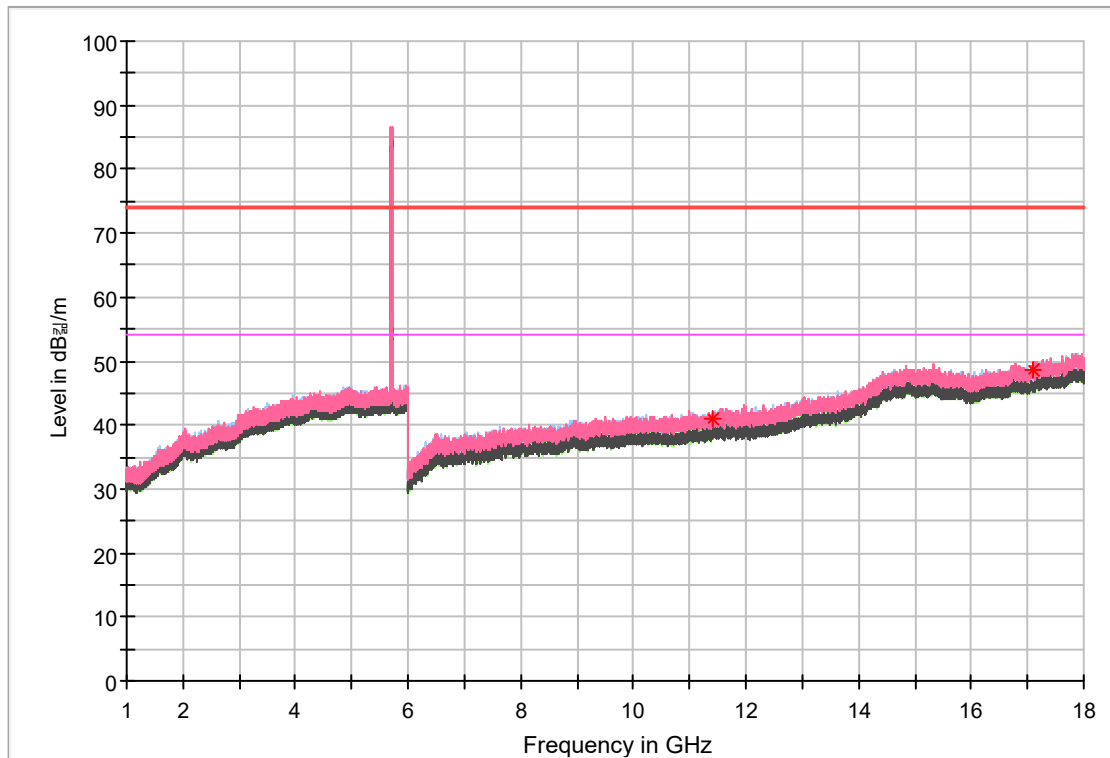


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
11 400.00	27.54	40.94	---	---	---	300	V	190	13.40	33.06	74.00	---	---
17 100.00	27.10	48.70	---	---	---	200	H	93	21.60	19.50	68.20	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_Straddle\_802.11a\_5720**

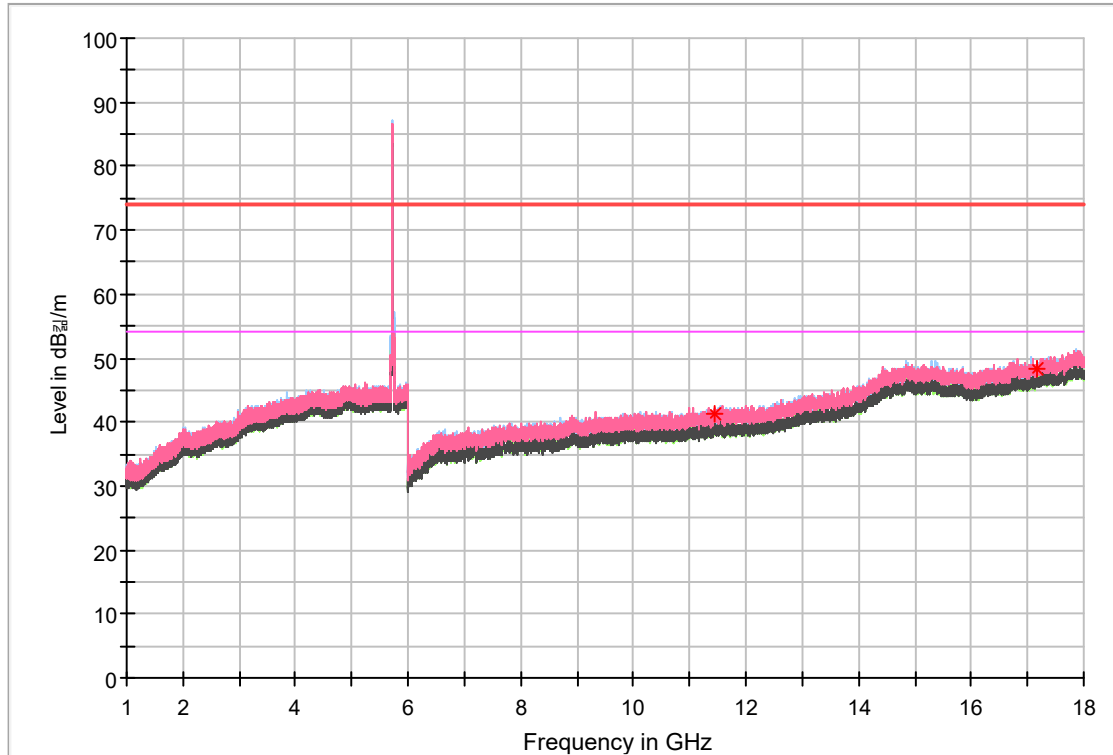

Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
11 440.13	27.92	41.42	---	---	---	300	H	0	13.50	32.58	74.00	---	---
17 160.00	26.72	48.42	---	---	---	300	V	293	21.70	19.78	68.20	---	---


**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.





**RSE\_U-NII-3\_802.11a\_5745**

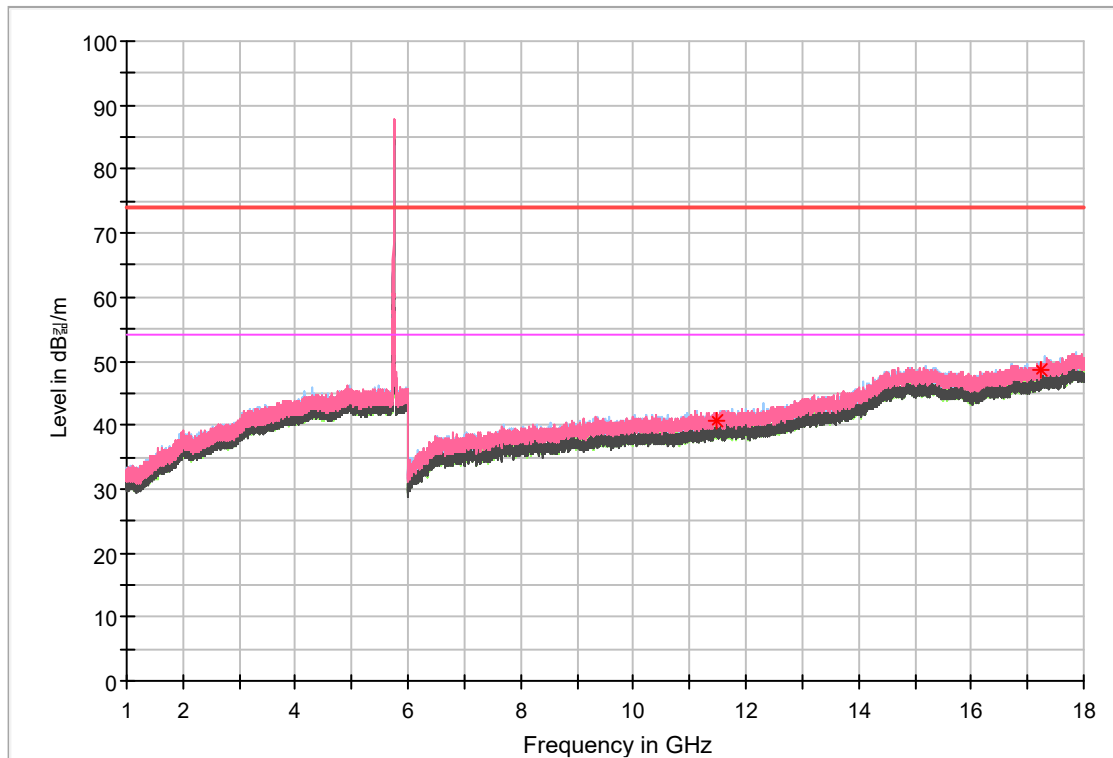


Frequency [MHz]	Peak Reading Value [dBμV]	Peak Result [dBμV/m]	AVG Reading Value [dBμV]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
11 490.00	27.22	40.72	---	---	---	200	V	171	13.50	33.28	74.00	---	---
17 235.00	26.76	48.56	---	---	---	200	H	172	21.80	19.64	68.20	---	---

**Remarks**

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2C\_802.11a\_5805**

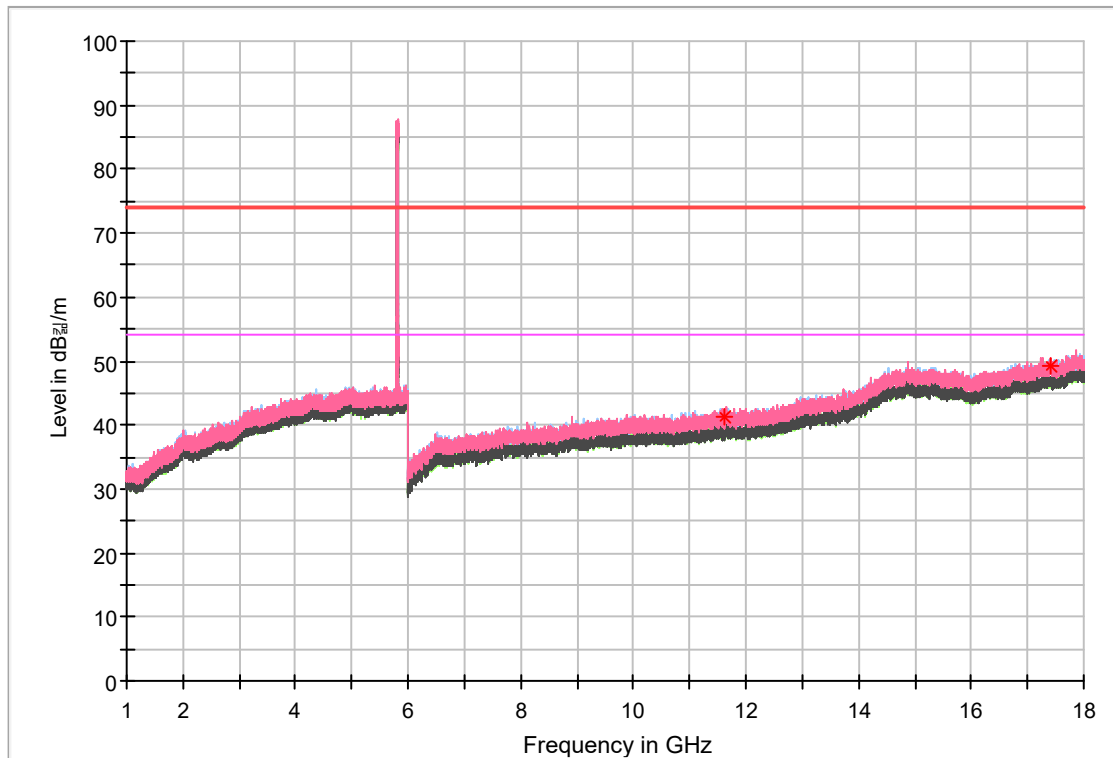


Frequency [MHz]	Peak Reading Value [dBµV]	Peak Result [dBµV/m]	AVG Reading Value [dBµV]	AVG Result [dBµV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBµV/m]	AVG Margin [dB]	AVG Limit [dBµV/m]
11 609.63	27.65	41.25	---	---	---	200	V	142	13.60	32.75	74.00	---	---
17 415.00	27.10	49.20	---	---	---	200	H	8	22.10	19.00	68.20	---	---

**Remarks**

1. Peak Result(dBµV/m) = Peak Reading Value(dBµV/m) + Correction Factor(dB)
2. Average Result(dBµV/m) = Average Reading Value(dBµV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBµV/m) – (Peak/Average) Limit (dBµV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-2C\_802.11a\_5825**

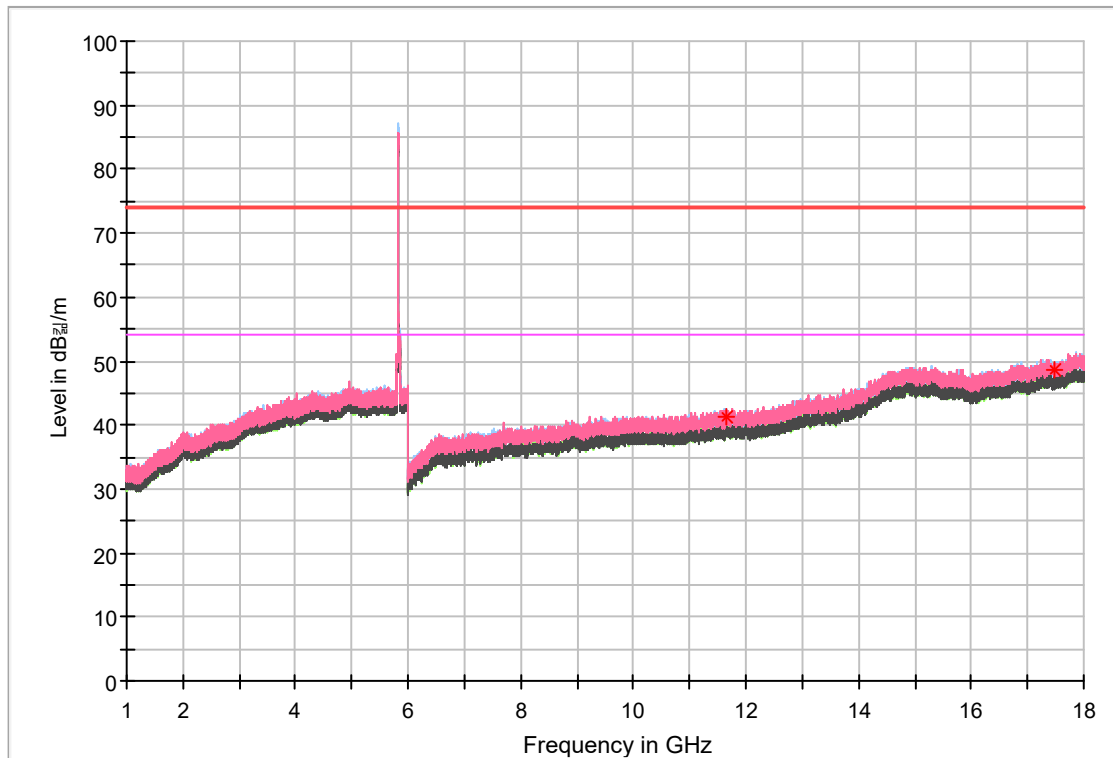


Frequency [MHz]	Peak Reading Value [dBμV]	Peak Result [dBμV/m]	AVG Reading Value [dBμV]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
11 650.13	27.56	41.16	---	---	---	200	V	32	13.60	32.84	74.00	---	---
17 475.00	26.39	48.49	---	---	---	300	H	248	22.10	19.71	68.20	---	---

**Remarks**

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.



**RSE\_U-NII-1\_802.11n(HT20)\_5180**

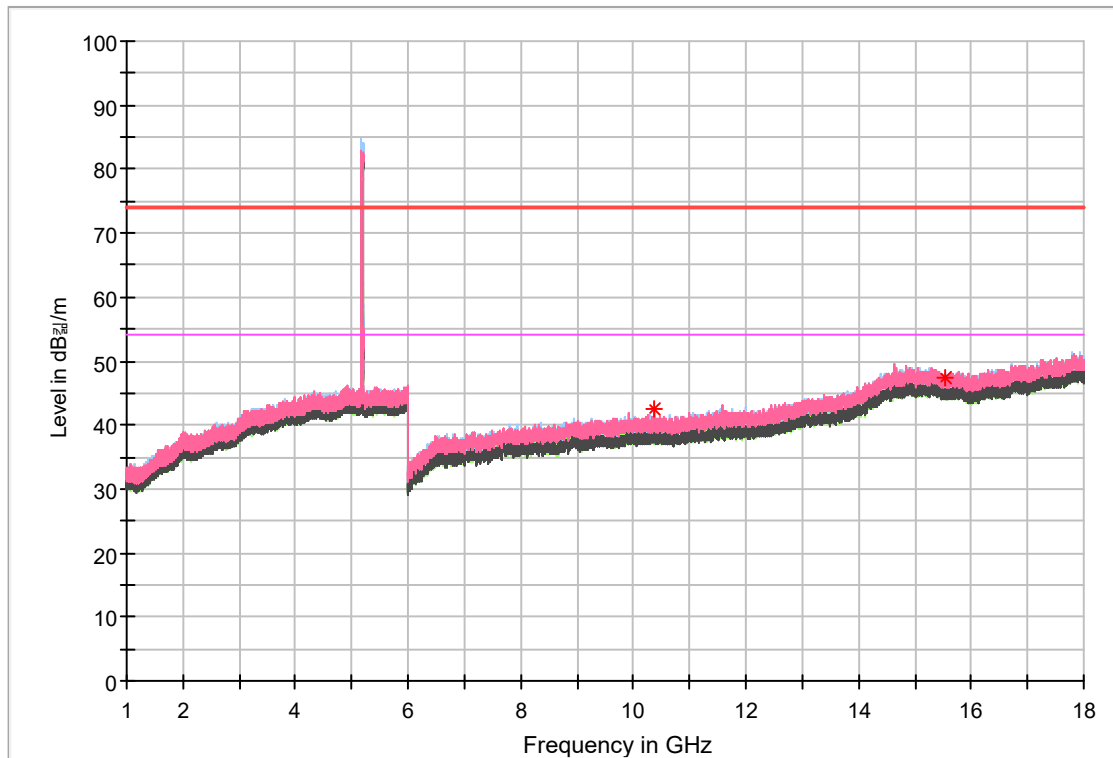

Frequency [MHz]	Peak Reading Value [dBμV]	Peak Result [dBμV/m]	AVG Reading Value [dBμV]	AVG Result [dBμV/m]	DCCF [dB]	Height [cm]	Pol [H/V]	Azimuth [deg]	Correction Factor [dB/m]	Peak Margin [dB]	Peak Limit [dBμV/m]	AVG Margin [dB]	AVG Limit [dBμV/m]
10 362.75	30.83	42.63	---	---	---	200	H	210	11.80	25.57	68.20	---	---
15 540.00	27.37	47.27	---	---	---	200	H	190	19.90	26.73	74.00	---	---

**Remarks**

1. Peak Result(dBμV/m) = Peak Reading Value(dBμV/m) + Correction Factor(dB)
2. Average Result(dBμV/m) = Average Reading Value(dBμV/m) + DCCF + Correction Factor(dB)
3. DCCF(Duty Cycle Correction Factor) = 10 x Log(1/Duty Cycle)
4. Correction Factor(dB) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB) + Distance Factor (dB)
5. Margin(dB) = (Peak/Average) Result (dBμV/m) – (Peak/Average) Limit (dBμV/m)
6. For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV Level does not need to be reported in addition
7. \* - indicates frequency in CFR Pt 15 / IC RSS-Restricted Band.