

FCC LTE REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: October 17, 2023
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-2310-FC069

FCC ID: **A3LSMS926B**

APPLICANT: **SAMSUNG Electronics Co., Ltd.**

Model(s): SM-S926B/DS
 Additional Model(s): SM-S926B
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §27

	Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
					Max. Power (W)	Max. Power (dBm)
Power Class 2	LTE – Band 41 (5)	2498.5 – 2687.5	4M51G7D	QPSK	0.261	24.16
			4M52W7D	16QAM	0.197	22.95
			4M54W7D	64QAM	0.184	22.64
			4M51W7D	256QAM	0.099	19.97
	LTE – Band 41 (10)	2501.0 – 2685.0	8M99G7D	QPSK	0.260	24.15
			9M03W7D	16QAM	0.205	23.11
			9M02W7D	64QAM	0.182	22.61
			9M01W7D	256QAM	0.102	20.07
	LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.266	24.25
			13M5W7D	16QAM	0.210	23.23
			13M5W7D	64QAM	0.199	22.98
			13M5W7D	256QAM	0.104	20.18
	LTE – Band 41 (20)	2506.0 – 2680.0	18M0G7D	QPSK	0.257	24.10
			17M9W7D	16QAM	0.214	23.30
			18M0W7D	64QAM	0.191	22.81
			17M9W7D	256QAM	0.103	20.14

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2310-FC069

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2310-FC069	October 17, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 CHANNEL EDGE.....	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	26
8.3 PEAK-TO-AVERAGE RATIO.....	30
8.4 OCCUPIED BANDWIDTH	31
8.5 CONDUCTED SPURIOUS EMISSIONS	32
8.6 CHANNEL EDGE.....	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	34
9. TEST PLOTS.....	46
11. ANNEX A_ TEST SETUP PHOTO	131

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMS926B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27
EUT Type:	Mobile phone
Model(s):	SM-S926B/DS
Additional Model(s):	SM-S926B
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
Date(s) of Tests:	August 31, 2023 ~ October 11, 2023
Serial number:	Radiated: R3CW70NE0XA Conducted: R3CW70NDT7T

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E, Bluetooth, BT LE, NFC, UWB, WPT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed Normal Hz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and Normal Hz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

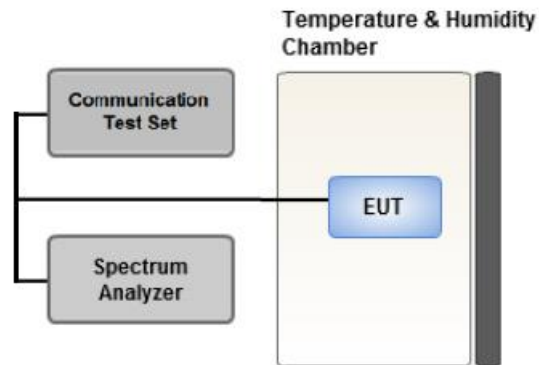

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:

Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep
(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.



Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL



Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

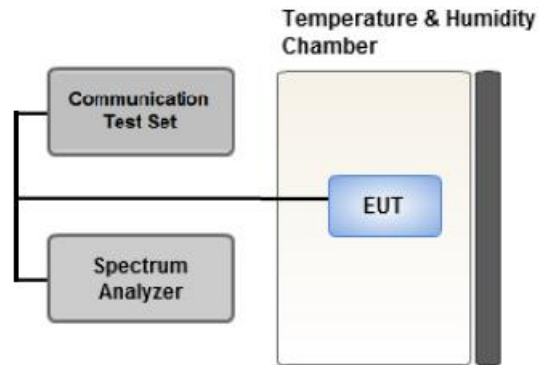

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

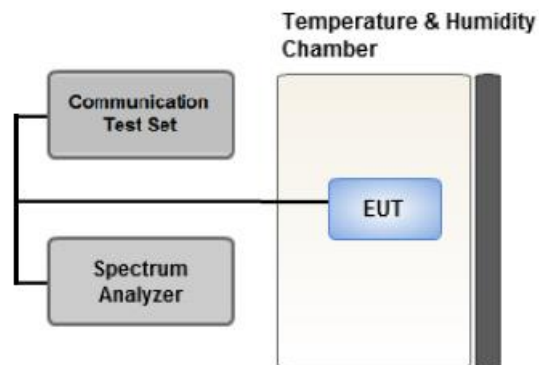

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- All power classes were tested, and the results were reported for the worst case PC2.
- Please refer to the table below.
- SM-S926B/DS & additional models were tested and the worst case results are reported.
 (Worst case : SM-S926B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	5	Low, Mid	1	0	X
			High	1	24	
		10	Low, Mid	1	0	
			High	1	49	
		15	Low, Mid	1	0	
			High	1	74	
		20	Low, Mid	1	0	
			High	1	99	
Radiated Spurious and Harmonic Emissions	QPSK	5	Low, Mid	1	0	Z
			High	1	24	
		10	Low, Mid	1	0	
			High	1	49	
		15	Low, Mid	1	0	
			High	1	74	
		20	Low, Mid	1	0	
			High	1	99	

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- SM-S926B/DS & additional models were tested and the worst case results are reported.
(Worst case : SM-S926B/DS)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Channel Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	01/19/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$ERP = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$EIRP = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2498.5	LTE B41/ 5 MHz	QPSK	-21.22	15.60	10.51	2.57	H	< 2.00	0.226	23.54	
		16-QAM	-22.09	14.73	10.51	2.57	H		0.185	22.67	
		64-QAM	-22.52	14.30	10.51	2.57	H		0.167	22.24	
		256-QAM	-25.27	11.55	10.51	2.57	H		0.089	19.49	
2593.0		QPSK	-20.99	16.23	10.64	2.71	H		0.261	24.16	
		16-QAM	-22.20	15.02	10.64	2.71	H		0.197	22.95	
		64-QAM	-22.51	14.71	10.64	2.71	H		0.184	22.64	
		256-QAM	-25.18	12.04	10.64	2.71	H		0.099	19.97	
2687.5		QPSK	-21.88	15.17	10.74	2.75	H		0.207	23.16	
		16-QAM	-22.92	14.13	10.74	2.75	H		0.163	22.12	
		64-QAM	-23.31	13.74	10.74	2.75	H		0.149	21.73	
		256-QAM	-26.04	11.01	10.74	2.75	H		0.079	19.00	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2501.0	LTE B41/ 10 MHz	QPSK	-21.01	15.81	10.51	2.57	H	< 2.00	0.237	23.75	
		16-QAM	-21.88	14.94	10.51	2.57	H		0.194	22.88	
		64-QAM	-22.37	14.45	10.51	2.57	H		0.173	22.39	
		256-QAM	-25.14	11.68	10.51	2.57	H		0.092	19.62	
2593.0		QPSK	-21.00	16.22	10.64	2.71	H		0.260	24.15	
		16-QAM	-22.04	15.18	10.64	2.71	H		0.205	23.11	
		64-QAM	-22.54	14.68	10.64	2.71	H		0.182	22.61	
		256-QAM	-25.08	12.14	10.64	2.71	H		0.102	20.07	
2685.0		QPSK	-22.31	14.93	10.73	2.75	H		0.195	22.91	
		16-QAM	-23.28	13.96	10.73	2.75	H		0.156	21.94	
		64-QAM	-23.69	13.55	10.73	2.75	H		0.142	21.53	
		256-QAM	-26.32	10.92	10.73	2.75	H		0.078	18.90	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2503.5	LTE B41/ 15 MHz	QPSK	-21.41	15.42	10.58	2.57	H	< 2.00	0.220	23.43	
		16-QAM	-22.34	14.49	10.58	2.57	H		0.178	22.50	
		64-QAM	-22.63	14.20	10.58	2.57	H		0.166	22.21	
		256-QAM	-25.46	11.37	10.58	2.57	H		0.087	19.38	
2593.0		QPSK	-20.90	16.32	10.64	2.71	H		0.266	24.25	
		16-QAM	-21.92	15.30	10.64	2.71	H		0.210	23.23	
		64-QAM	-22.17	15.05	10.64	2.71	H		0.199	22.98	
		256-QAM	-24.97	12.25	10.64	2.71	H		0.104	20.18	
2682.5		QPSK	-21.92	15.51	10.72	2.75	H		0.223	23.48	
		16-QAM	-22.92	14.51	10.72	2.75	H		0.177	22.48	
		64-QAM	-23.40	14.03	10.72	2.75	H		0.158	22.00	
		256-QAM	-25.90	11.53	10.72	2.75	H		0.089	19.50	

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
2506.0	LTE B41/ 20 MHz	QPSK	-21.21	15.62	10.58	2.57	H	< 2.00	0.231	23.63	
		16-QAM	-22.19	14.64	10.58	2.57	H		0.184	22.65	
		64-QAM	-22.58	14.25	10.58	2.57	H		0.168	22.26	
		256-QAM	-25.07	11.76	10.58	2.57	H		0.095	19.77	
2593.0		QPSK	-21.05	16.17	10.64	2.71	H		0.257	24.10	
		16-QAM	-21.85	15.37	10.64	2.71	H		0.214	23.30	
		64-QAM	-22.34	14.88	10.64	2.71	H		0.191	22.81	
		256-QAM	-25.01	12.21	10.64	2.71	H		0.103	20.14	
2680.0		QPSK	-22.18	15.25	10.72	2.75	H		0.210	23.22	
		16-QAM	-23.00	14.43	10.72	2.75	H		0.174	22.40	
		64-QAM	-23.37	14.06	10.72	2.75	H		0.160	22.03	
		256-QAM	-26.21	11.22	10.72	2.75	H		0.083	19.19	

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.16 dBm = 0.261 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meter
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.16 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39675 (2498.5)	4 997.00	-47.44	12.56	-57.25	3.81	V	-48.50	72.66
	7 495.50	-51.75	10.78	-51.36	4.71	V	-45.29	69.45
	9 994.00	-38.17	11.18	-33.75	5.52	V	-28.09	52.25
	12 492.50	-42.45	13.08	-38.04	6.29	V	-31.25	55.41
40620 (2593.0)	5 186.00	-48.75	12.55	-57.52	3.82	V	-48.80	72.96
	7 779.00	-51.48	11.41	-51.65	4.79	V	-45.03	69.19
	10 372.00	-47.43	11.43	-41.98	5.59	V	-36.14	60.30
	12 965.00	-57.12	12.95	-50.17	6.41	V	-43.62	67.78
	15 558.00	-57.53	14.73	-48.90	7.12	V	-41.29	65.45
41565 (2687.5)	5 375.00	-48.03	13.06	-57.21	3.85	V	-47.99	72.15
	8 062.50	-46.10	10.74	-44.29	4.86	H	-38.41	62.57
	10 750.00	-46.38	11.31	-41.37	5.65	V	-35.71	59.87
	13 437.50	-57.09	12.59	-47.88	6.56	V	-41.85	66.01

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.15 dBm = 0.260 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meter
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.15 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39700 (2501.0)	5 002.00	-47.42	12.56	-57.23	3.81	H	-48.48	72.63
	7 503.00	-51.72	10.78	-51.64	4.71	H	-45.57	69.72
	10 004.00	-39.67	11.22	-35.48	5.52	V	-29.79	53.94
	12 505.00	-43.50	13.11	-39.34	6.25	V	-32.48	56.63
40620 (2593.0)	5 186.00	-49.74	12.55	-58.51	3.82	V	-49.79	73.94
	7 779.00	-53.23	11.41	-53.40	4.79	H	-46.78	70.93
	10 372.00	-47.49	11.43	-42.04	5.59	V	-36.20	60.35
	12 965.00	-56.15	12.95	-49.20	6.41	V	-42.65	66.80
41540 (2685.0)	5 370.00	-51.41	13.07	-60.51	3.85	V	-51.29	75.44
	8 055.00	-48.01	10.74	-46.19	4.87	H	-40.32	64.47
	10 740.00	-47.22	11.32	-42.51	5.71	V	-36.90	61.05
	13 425.00	-57.72	12.61	-48.70	6.55	H	-42.64	66.79

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.25 dBm = 0.266 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meter
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.25 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39725 (2503.5)	5 007.00	-45.74	12.55	-55.76	3.88	H	-47.09	71.34
	7 510.50	-50.41	10.78	-50.82	4.71	H	-44.75	69.00
	10 014.00	-42.14	11.25	-37.90	5.53	V	-32.18	56.43
	12 517.50	-45.48	13.12	-41.19	6.21	V	-34.28	58.53
40620 (2593.0)	5 186.00	-49.18	12.55	-57.95	3.82	V	-49.23	73.48
	7 779.00	-51.21	11.41	-51.38	4.79	V	-44.76	69.01
	10 372.00	-48.49	11.43	-43.04	5.59	V	-37.20	61.45
	12 965.00	-56.89	12.95	-49.94	6.41	V	-43.39	67.64
41515 (2682.5)	5 365.00	-51.03	13.08	-60.02	3.86	V	-50.79	75.04
	8 047.50	-49.17	10.73	-47.34	4.87	H	-41.48	65.73
	10 730.00	-46.72	11.33	-42.27	5.78	V	-36.72	60.97
	13 412.50	-57.12	12.62	-47.91	6.53	V	-41.82	66.07

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 24.10 dBm = 0.257 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meter
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.10 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39750 (2506.0)	5 012.00	-46.69	12.55	-56.71	3.88	V	-48.04	72.14
	7 518.00	-54.06	10.82	-54.76	4.71	V	-48.65	72.75
	10 024.00	-42.39	11.29	-38.17	5.54	V	-32.41	56.51
	12 530.00	-47.30	13.14	-42.79	6.22	H	-35.87	59.97
40620 (2593.0)	5 186.00	-48.89	12.55	-57.66	3.82	V	-48.94	73.04
	7 779.00	-51.70	11.41	-51.87	4.79	V	-45.25	69.35
	10 372.00	-46.90	11.43	-41.45	5.59	V	-35.61	59.71
	12 965.00	-56.31	12.95	-49.36	6.41	V	-42.81	66.91
41490 (2680.0)	5 360.00	-49.25	13.09	-58.12	3.86	V	-48.89	72.99
	8 040.00	-49.85	10.73	-48.06	4.86	H	-42.19	66.29
	10 720.00	-45.56	11.33	-41.19	5.81	V	-35.67	59.77
	13 400.00	-57.63	12.64	-48.28	6.52	V	-42.16	66.26

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
41	5 MHz	2593.0	QPSK	25	0	5.42
			16-QAM			5.75
			64-QAM			6.54
			256-QAM			6.69
	10 MHz		QPSK	50		5.48
			16-QAM			5.69
			64-QAM			5.97
			256-QAM			6.64
	15 MHz		QPSK	75		5.32
			16-QAM			5.65
			64-QAM			5.92
			256-QAM			6.32
	20 MHz		QPSK	100		5.29
			16-QAM			5.67
			64-QAM			5.98
			256-QAM			6.36

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 91 ~ 106.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41	5 MHz	2593.0	QPSK	25	0	4.5046
			16-QAM			4.5155
			64-QAM			4.5401
			256-QAM			4.5102
	10 MHz		QPSK	50		8.9931
			16-QAM			9.0268
			64-QAM			9.0204
			256-QAM			9.0103
	15 MHz		QPSK	75		13.496
			16-QAM			13.457
			64-QAM			13.486
			256-QAM			13.491
	20 MHz		QPSK	100		17.947
			16-QAM			17.917
			64-QAM			17.967
			256-QAM			17.888

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 75 ~ 90.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	26.1882	34.110	-76.896	-42.786	-25.00
		2593.0	26.1513	34.110	-76.605	-42.495	
		2687.5	26.1585	34.110	-76.402	-42.292	
	10	2501.0	26.1309	34.110	-76.964	-42.854	
		2593.0	26.1568	34.110	-76.773	-42.663	
		2685.0	26.1245	34.110	-76.530	-42.420	
	15	2503.5	25.8295	34.110	-76.786	-42.676	
		2593.0	26.1330	34.110	-76.851	-42.741	
		2682.5	25.8593	34.110	-76.922	-42.812	
	20	2506.0	26.1470	34.110	-76.950	-42.840	
		2593.0	26.1351	34.110	-77.032	-42.922	
		2680.0	2.7254	31.955	-72.795	-40.840	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 107 ~ 130.
2. Conducted Spurious Emissions was tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.
 - Duty Cycle factor(dB) = 3.979
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.249
1 – 5	31.955
5 – 10	32.570
10 – 15	33.095
15 – 20	33.468
Above 20	34.110

8.6 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-20.62	-19.97	-21.58	-22.10	-31.27	-28.19	-30.91
10 MHz	2501.0	QPSK	50/0	-24.06	-21.83	-23.72	-23.58	-27.83	-26.54	-31.40
15 MHz	2503.5	QPSK	75/0	-25.14	-25.20	-25.69	-25.44	-29.14	-28.63	-34.36
20 MHz	2506.0	QPSK	100/0	-27.19	-26.84	-26.64	-26.46	-29.52	-28.81	-35.42
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-19.11	-18.81	-19.68	-20.38
	2687.5	QPSK	25	0	-18.06	-17.95	-14.50	-14.41
10 MHz	2593.0	QPSK	50	0	-22.60	-21.60	-21.60	-21.40
	2685.0	QPSK	50	0	-20.14	-19.69	-15.99	-16.22
15 MHz	2593.0	QPSK	75	0	-23.37	-23.87	-23.54	-23.80
	2682.5	QPSK	75	0	-20.90	-21.48	-19.15	-19.71
20 MHz	2593.0	QPSK	100	0	-25.34	-26.26	-24.63	-25.08
	2680.0	QPSK	100	0	-22.34	-22.89	-19.89	-21.38
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-26.79	-26.82	-31.26	-29.71
	2687.5	QPSK	25	0	-25.39	-24.87	-28.38	-27.33
10 MHz	2593.0	QPSK	50	0	-25.04	-23.72	-30.91	-29.21
	2685.0	QPSK	50	0	-20.15	-19.59	-28.89	-27.60
15 MHz	2593.0	QPSK	75	0	-25.59	-25.16	-33.62	-31.21
	2682.5	QPSK	75	0	-21.19	-21.79	-31.10	-29.77
20 MHz	2593.0	QPSK	100	0	-25.97	-25.47	-34.81	-32.18
	2680.0	QPSK	100	0	-21.86	-22.57	-32.12	-30.88
Limit(dBm)					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. RB = Resource Block
5. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 3.979
6. Plots of the EUT's Channel Edge are shown Page 47 ~ 74. (1RB & Full RB)

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2498 500 008	0.0	0.000 000	0.000
100 %		-30	2498 500 020	12.3	0.000 000	0.005
100 %		-20	2498 500 019	11.5	0.000 000	0.005
100 %		-10	2498 500 020	12.4	0.000 000	0.005
100 %		0	2498 500 024	16.3	0.000 001	0.007
100 %		+10	2498 500 019	11.3	0.000 000	0.005
100 %		+30	2498 500 017	9.5	0.000 000	0.004
100 %		+40	2498 500 021	12.9	0.000 001	0.005
100 %		+50	2498 500 018	10.3	0.000 000	0.004
Batt. Endpoint		3.300	+20	2498 500 018	9.9	0.000 000

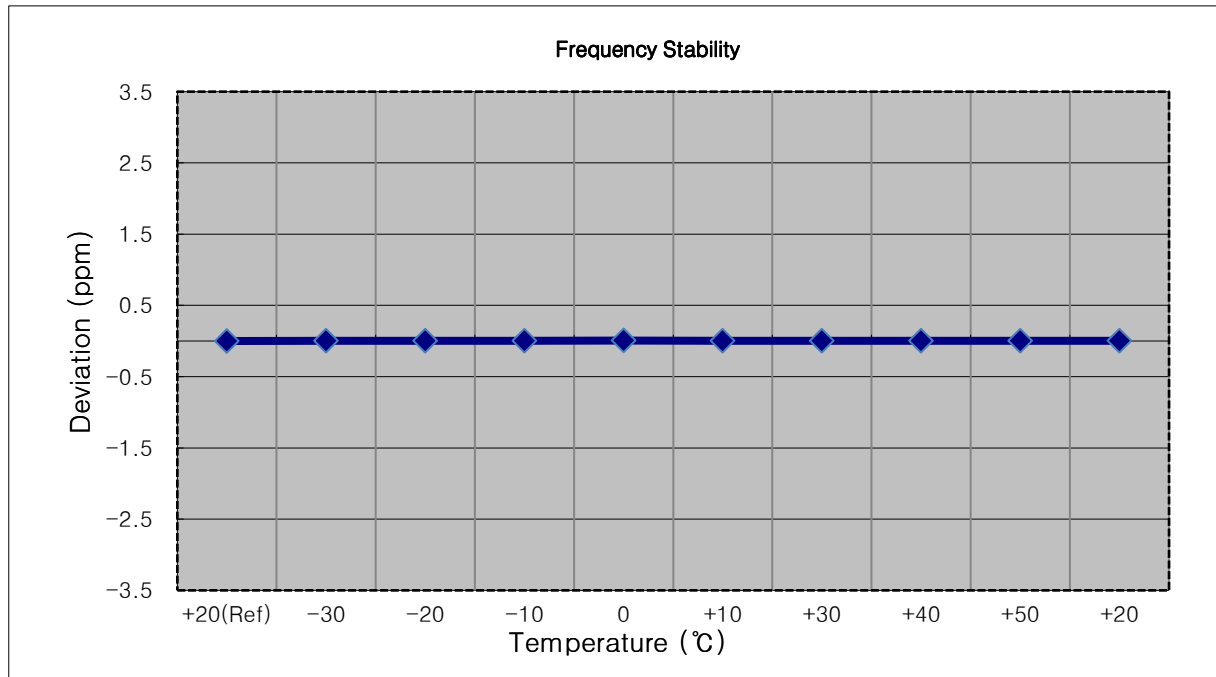


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2501 000 011	0.0	0.000 000	0.000
100 %		-30	2501 000 019	7.9	0.000 000	0.003
100 %		-20	2501 000 017	6.2	0.000 000	0.002
100 %		-10	2501 000 022	11.3	0.000 000	0.005
100 %		0	2501 000 025	14.0	0.000 001	0.006
100 %		+10	2501 000 019	8.0	0.000 000	0.003
100 %		+30	2501 000 020	9.2	0.000 000	0.004
100 %		+40	2501 000 022	10.7	0.000 000	0.004
100 %		+50	2501 000 020	8.4	0.000 000	0.003
Batt. Endpoint	3.300	+20	2501 000 020	8.4	0.000 000	0.003

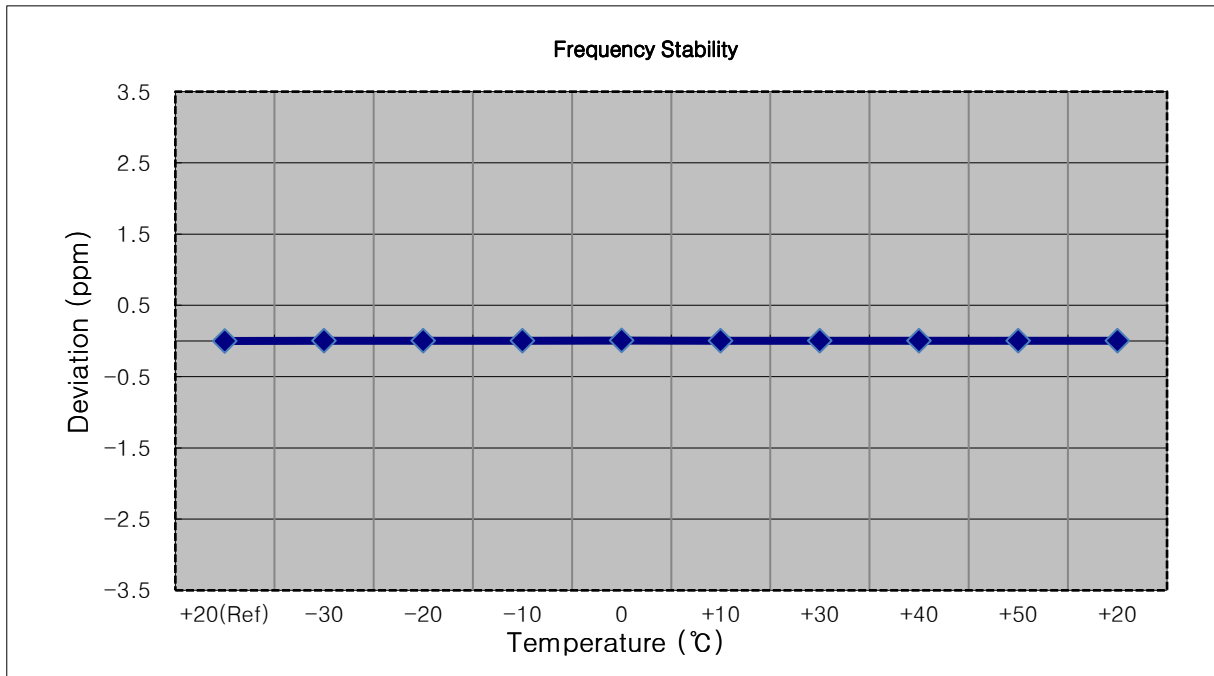


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2503 500 006	0.0	0.000 000	0.000
100 %		-30	2503 500 016	9.1	0.000 000	0.004
100 %		-20	2503 500 014	7.6	0.000 000	0.003
100 %		-10	2503 500 017	10.9	0.000 000	0.004
100 %		0	2503 500 016	9.9	0.000 000	0.004
100 %		+10	2503 500 013	6.5	0.000 000	0.003
100 %		+30	2503 500 016	9.8	0.000 000	0.004
100 %		+40	2503 500 019	12.9	0.000 001	0.005
100 %		+50	2503 500 018	11.1	0.000 000	0.004
Batt. Endpoint	3.300	+20	2503 500 021	14.3	0.000 001	0.006

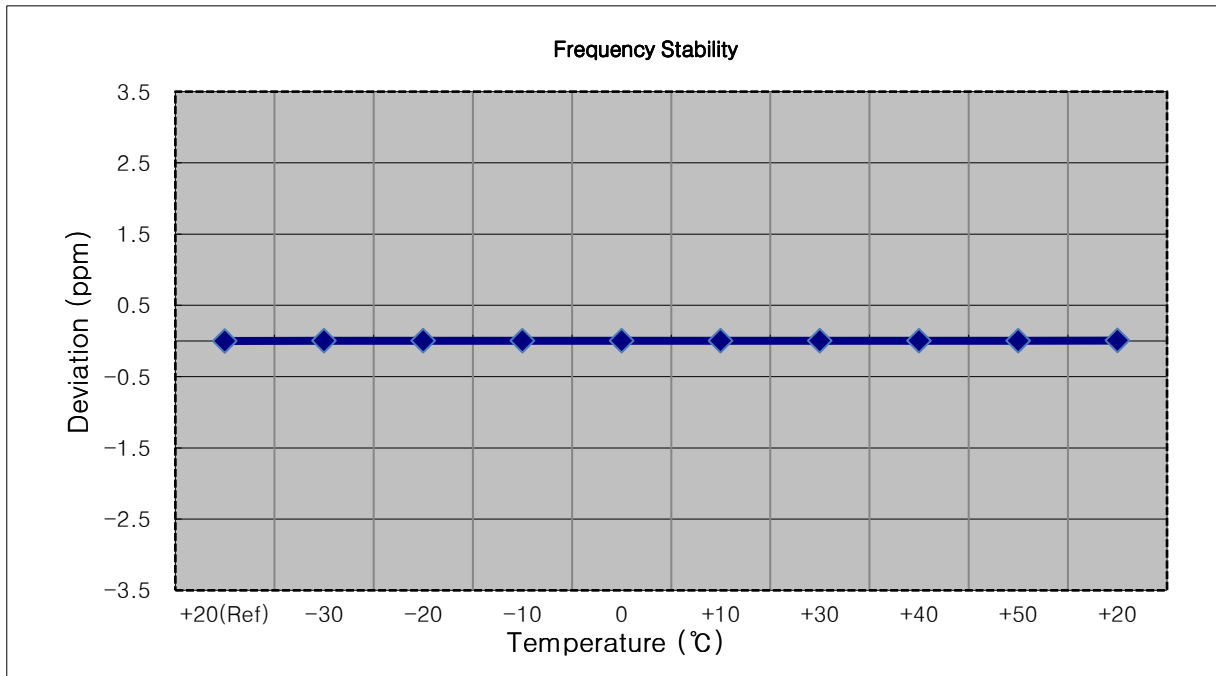


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2506 000 007	0.0	0.000 000	0.000
100 %		-30	2506 000 018	10.6	0.000 000	0.004
100 %		-20	2506 000 017	9.5	0.000 000	0.004
100 %		-10	2506 000 022	14.3	0.000 001	0.006
100 %		0	2506 000 021	13.7	0.000 001	0.005
100 %		+10	2506 000 016	9.0	0.000 000	0.004
100 %		+30	2506 000 018	10.4	0.000 000	0.004
100 %		+40	2506 000 016	9.1	0.000 000	0.004
100 %		+50	2506 000 022	14.6	0.000 001	0.006
Batt. Endpoint		3.300	+20	2506 000 019	11.7	0.000 000

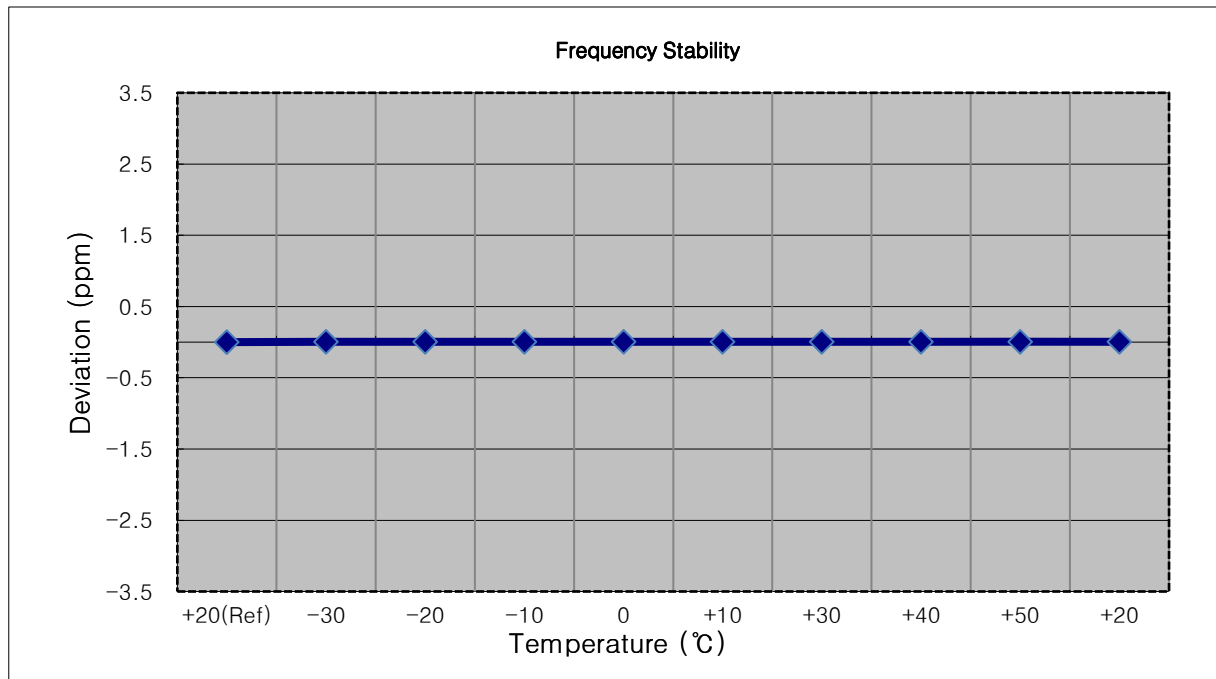


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 012	0.0	0.000 000	0.000
100 %		-30	2593 000 030	18.4	0.000 001	0.007
100 %		-20	2593 000 025	13.4	0.000 001	0.005
100 %		-10	2593 000 024	12.5	0.000 000	0.005
100 %		0	2593 000 029	17.1	0.000 001	0.007
100 %		+10	2593 000 028	15.8	0.000 001	0.006
100 %		+30	2593 000 026	14.1	0.000 001	0.005
100 %		+40	2593 000 022	10.1	0.000 000	0.004
100 %		+50	2593 000 028	15.8	0.000 001	0.006
Batt. Endpoint	3.300	+20	2593 000 024	12.3	0.000 000	0.005

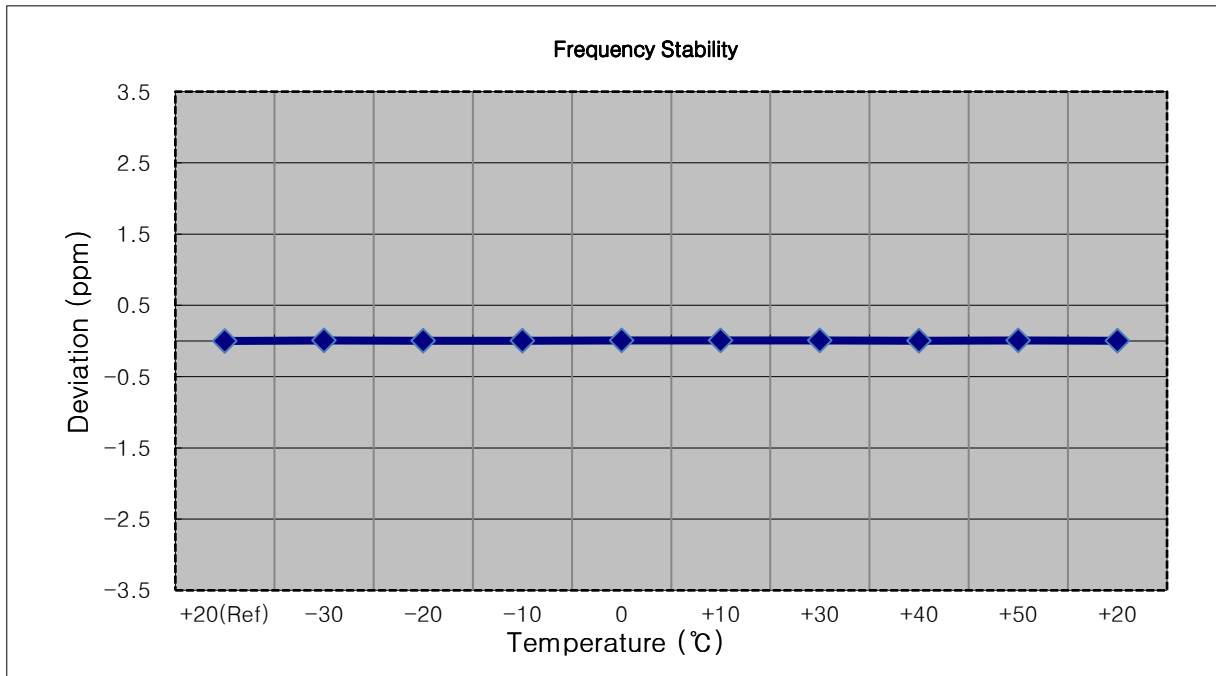


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 011	0.0	0.000 000	0.000
100 %		-30	2593 000 025	14.2	0.000 001	0.005
100 %		-20	2593 000 022	10.5	0.000 000	0.004
100 %		-10	2593 000 022	11.0	0.000 000	0.004
100 %		0	2593 000 019	7.9	0.000 000	0.003
100 %		+10	2593 000 024	13.0	0.000 001	0.005
100 %		+30	2593 000 019	8.4	0.000 000	0.003
100 %		+40	2593 000 025	14.1	0.000 001	0.005
100 %		+50	2593 000 019	8.4	0.000 000	0.003
Batt. Endpoint	3.300	+20	2593 000 023	12.1	0.000 000	0.005

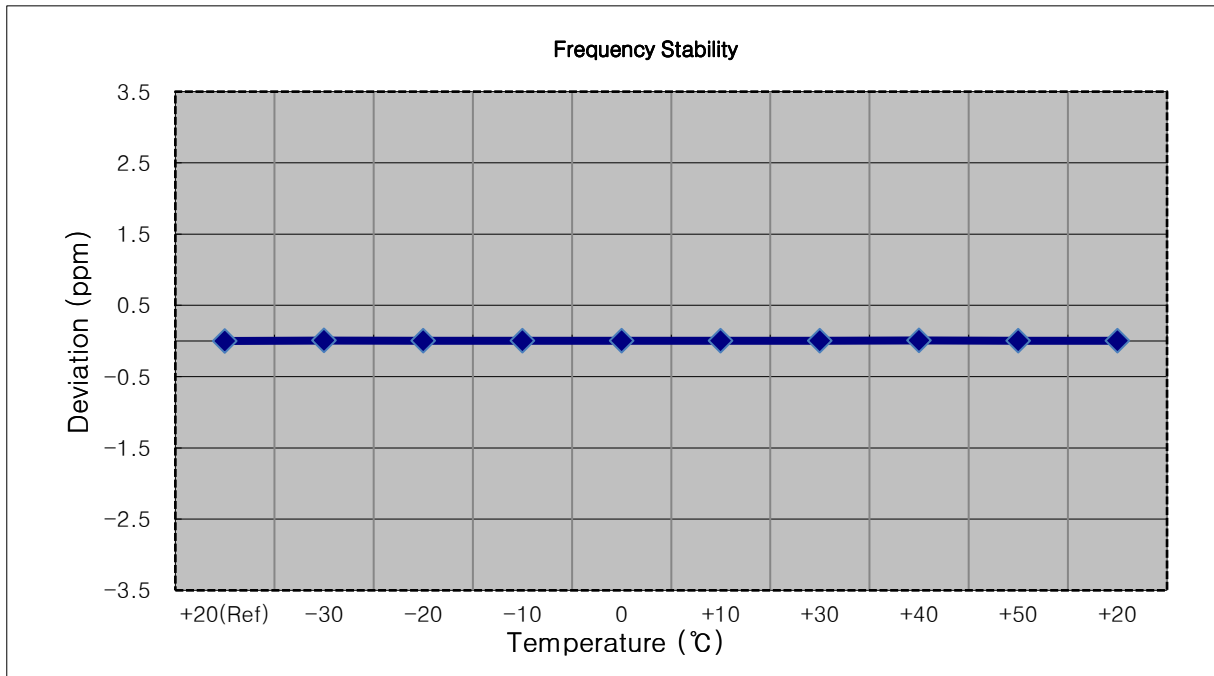


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 012	0.0	0.000 000	0.000
100 %		-30	2593 000 025	13.5	0.000 001	0.005
100 %		-20	2593 000 023	11.6	0.000 000	0.004
100 %		-10	2593 000 023	11.5	0.000 000	0.004
100 %		0	2593 000 027	15.6	0.000 001	0.006
100 %		+10	2593 000 025	12.9	0.000 000	0.005
100 %		+30	2593 000 024	12.5	0.000 000	0.005
100 %		+40	2593 000 026	14.6	0.000 001	0.006
100 %		+50	2593 000 021	9.4	0.000 000	0.004
Batt. Endpoint	3.300	+20	2593 000 025	13.6	0.000 001	0.005

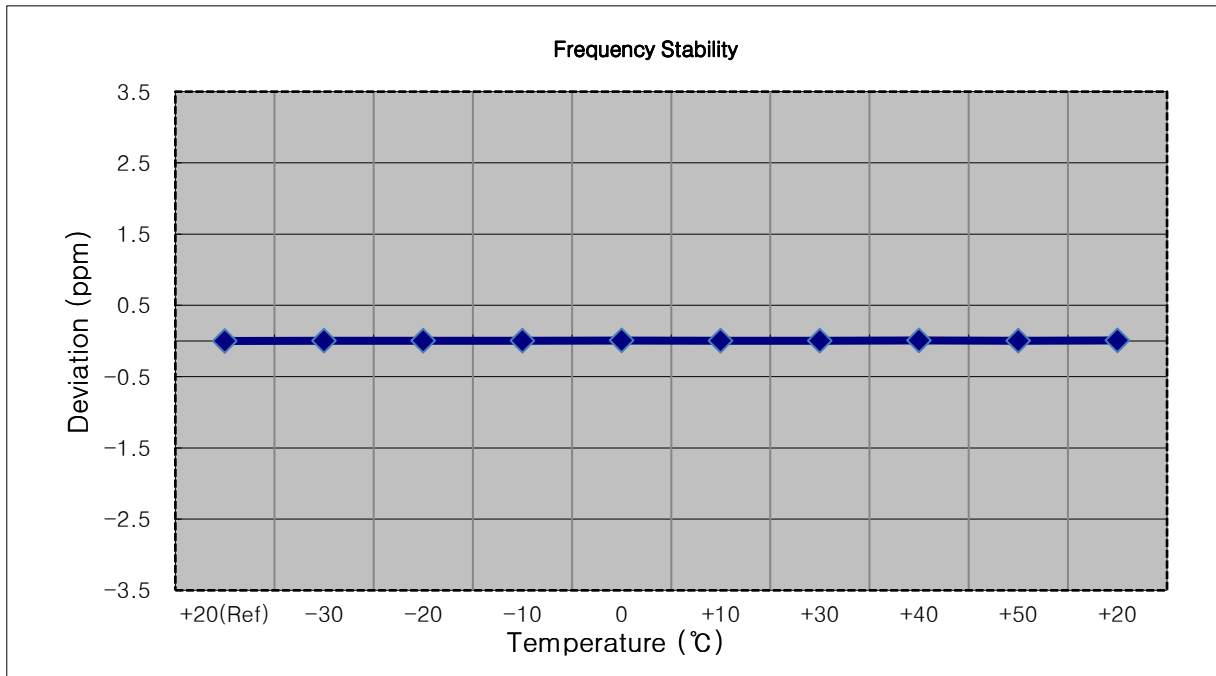


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 012	0.0	0.000 000	0.000
100 %		-30	2593 000 023	10.3	0.000 000	0.004
100 %		-20	2593 000 023	11.0	0.000 000	0.004
100 %		-10	2593 000 026	13.7	0.000 001	0.005
100 %		0	2593 000 024	11.4	0.000 000	0.004
100 %		+10	2593 000 025	12.9	0.000 000	0.005
100 %		+30	2593 000 025	13.1	0.000 001	0.005
100 %		+40	2593 000 023	11.2	0.000 000	0.004
100 %		+50	2593 000 024	11.3	0.000 000	0.004
Batt. Endpoint	3.300	+20	2593 000 021	9.1	0.000 000	0.004

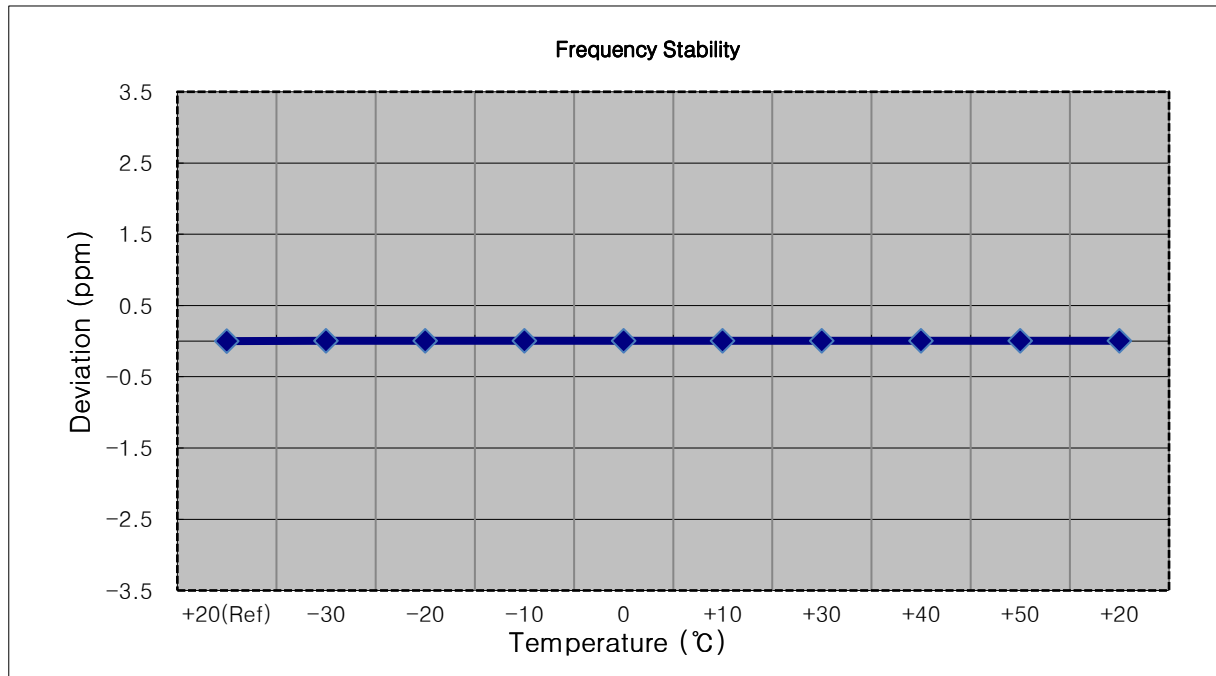


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2687 500 016	0.0	0.000 000	0.000
100 %		-30	2687 500 035	19.6	0.000 001	0.007
100 %		-20	2687 500 032	16.1	0.000 001	0.006
100 %		-10	2687 500 032	16.2	0.000 001	0.006
100 %		0	2687 500 032	16.4	0.000 001	0.006
100 %		+10	2687 500 030	14.6	0.000 001	0.005
100 %		+30	2687 500 035	18.9	0.000 001	0.007
100 %		+40	2687 500 035	18.9	0.000 001	0.007
100 %		+50	2687 500 032	16.1	0.000 001	0.006
Batt. Endpoint		3.300	+20	2687 500 029	13.3	0.000 000

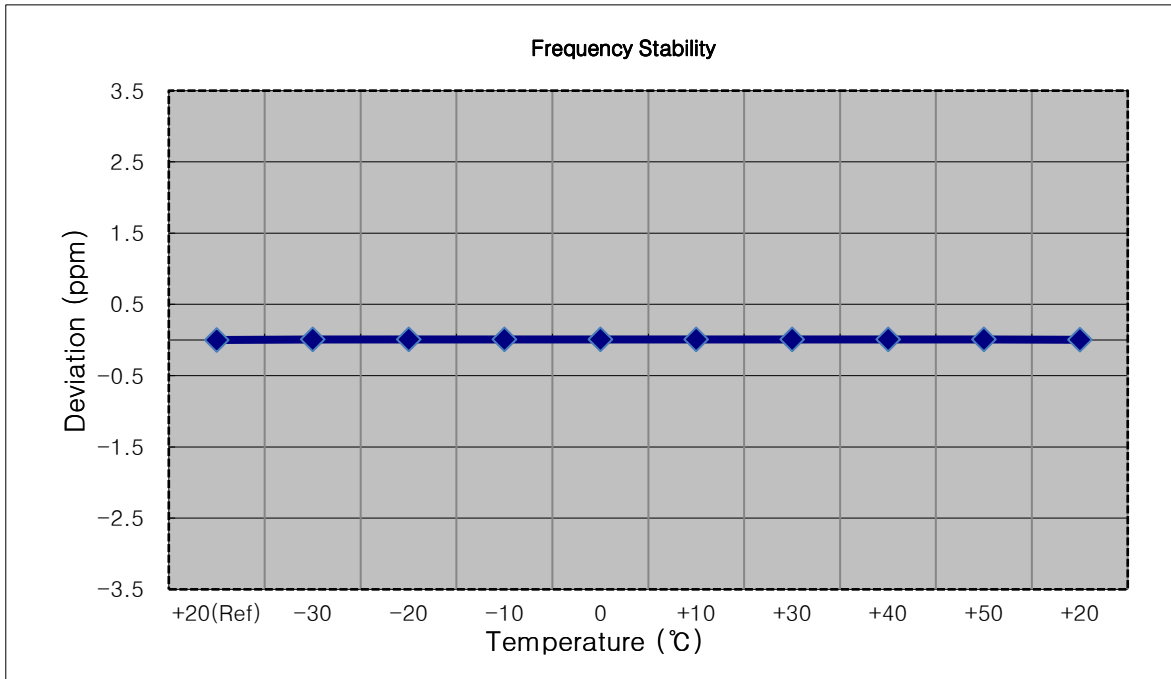


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2685 000 013	0.0	0.000 000	0.000
100 %		-30	2685 000 026	13.4	0.000 000	0.005
100 %		-20	2685 000 027	14.5	0.000 001	0.005
100 %		-10	2685 000 028	15.2	0.000 001	0.006
100 %		0	2685 000 032	18.6	0.000 001	0.007
100 %		+10	2685 000 028	14.9	0.000 001	0.006
100 %		+30	2685 000 032	18.8	0.000 001	0.007
100 %		+40	2685 000 029	16.1	0.000 001	0.006
100 %		+50	2685 000 026	12.6	0.000 000	0.005
Batt. Endpoint	3.300	+20	2685 000 027	14.2	0.000 001	0.005

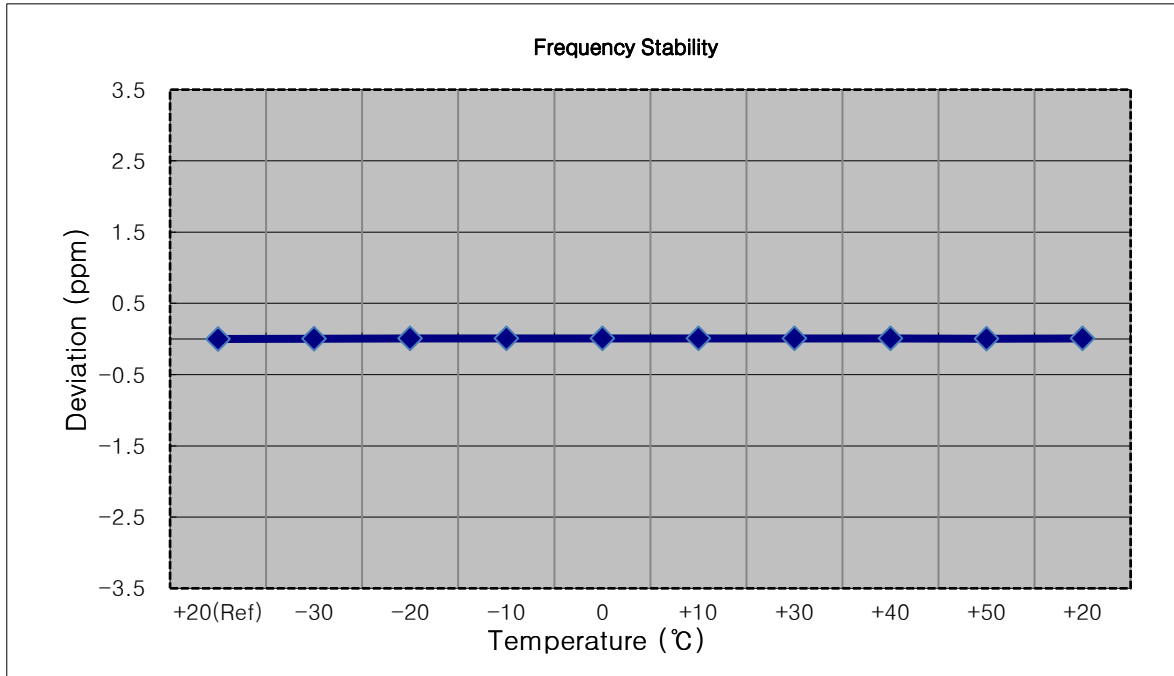


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2682 500 018	0.0	0.000 000	0.000
100 %		-30	2682 500 031	12.4	0.000 000	0.005
100 %		-20	2682 500 032	13.9	0.000 001	0.005
100 %		-10	2682 500 032	14.1	0.000 001	0.005
100 %		0	2682 500 031	13.3	0.000 000	0.005
100 %		+10	2682 500 033	15.1	0.000 001	0.006
100 %		+30	2682 500 033	14.5	0.000 001	0.005
100 %		+40	2682 500 030	11.9	0.000 000	0.004
100 %		+50	2682 500 033	15.3	0.000 001	0.006
Batt. Endpoint	3.300	+20	2682 500 032	13.8	0.000 001	0.005

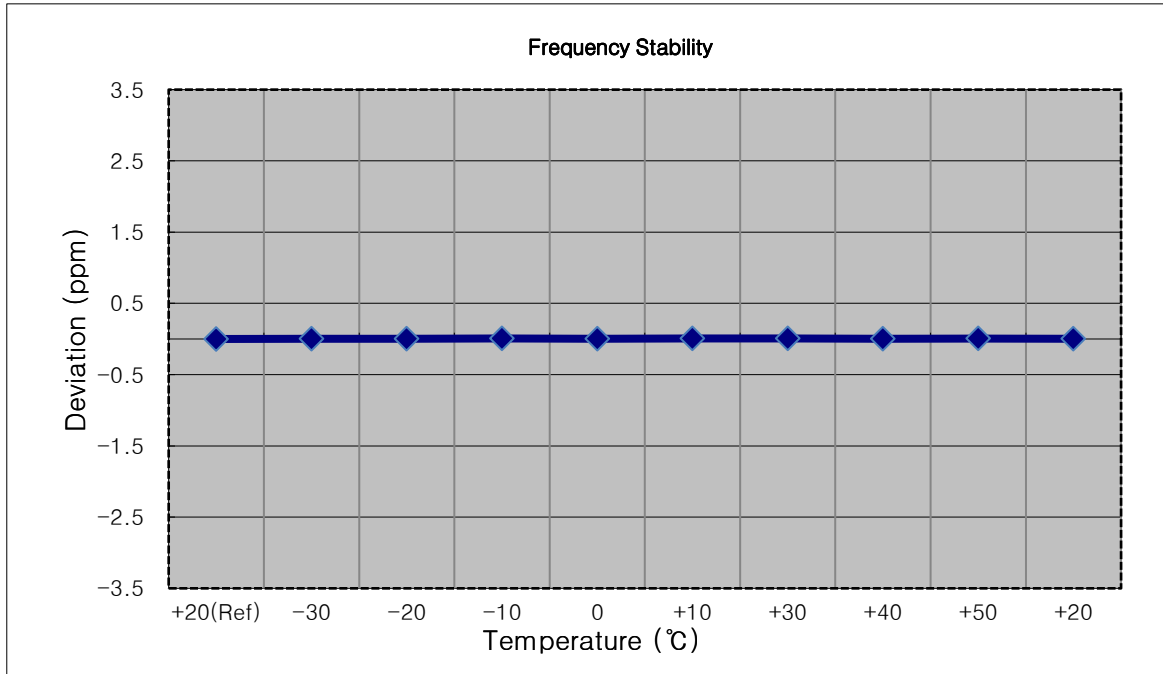


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2680 000 011	0.0	0.000 000	0.000
100 %		-30	2680 000 022	10.9	0.000 000	0.004
100 %		-20	2680 000 024	12.9	0.000 000	0.005
100 %		-10	2680 000 026	14.3	0.000 001	0.005
100 %		0	2680 000 024	12.6	0.000 000	0.005
100 %		+10	2680 000 001	-9.9	0.000 000	-0.004
100 %		+30	2680 000 024	12.3	0.000 000	0.005
100 %		+40	2680 000 024	13.0	0.000 000	0.005
100 %		+50	2680 000 024	13.0	0.000 000	0.005
Batt. Endpoint	3.300	+20	2680 000 025	13.8	0.000 001	0.005

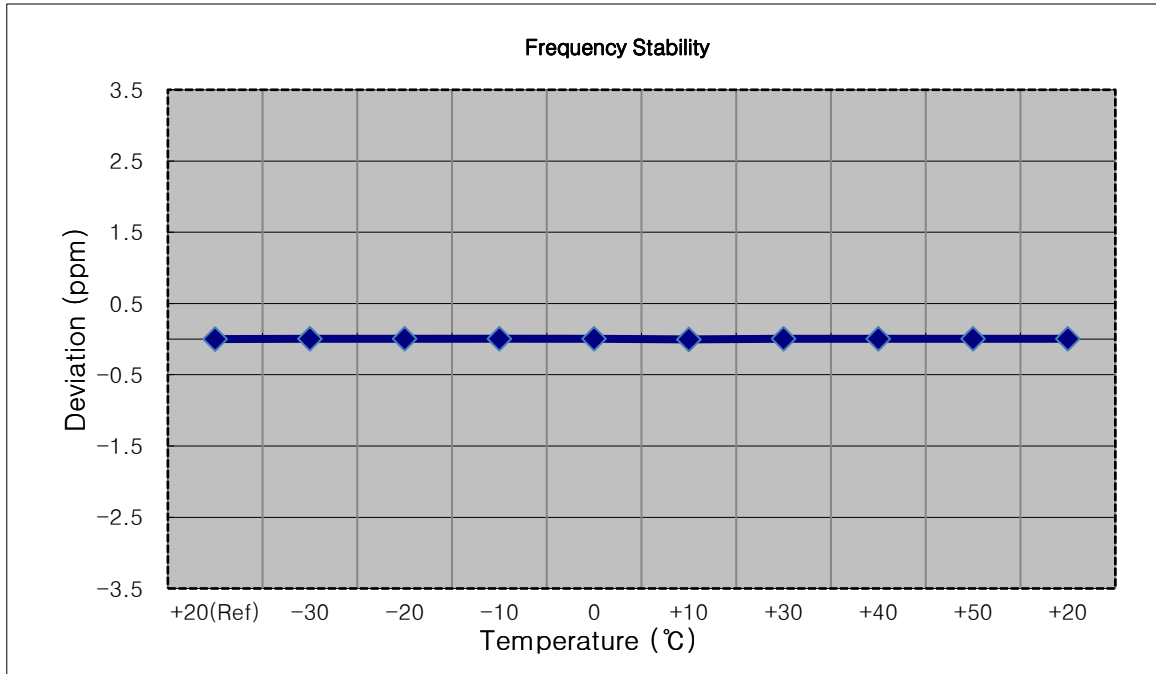


9. TEST PLOTS


LTE41_5 M_BandEdge_Lower_Low_2498.5 MHz_QPSK_Full RB

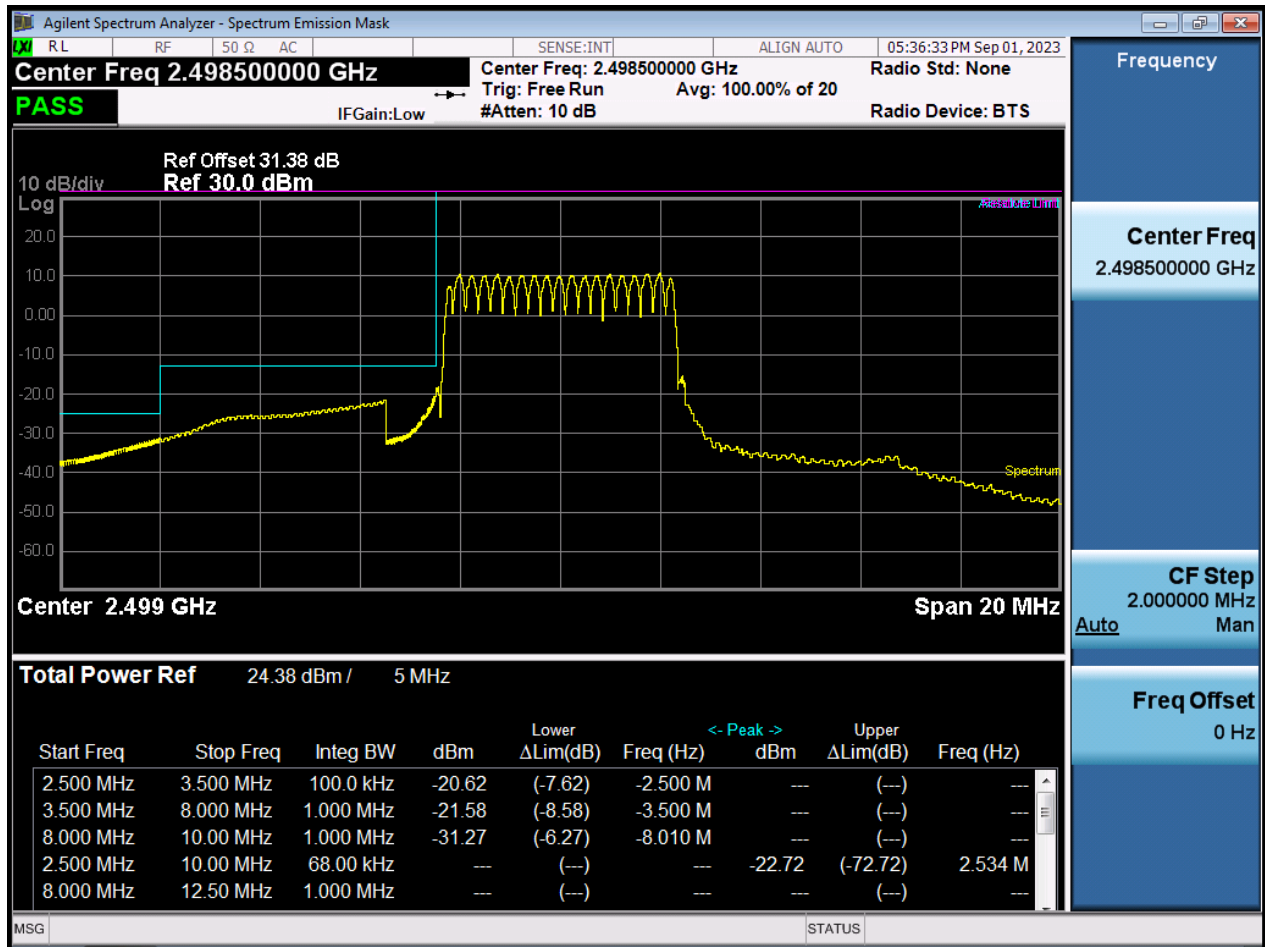


LTE41_5 M_BandEdge_Upper_Low_2498.5 MHz_QPSK_Full RB

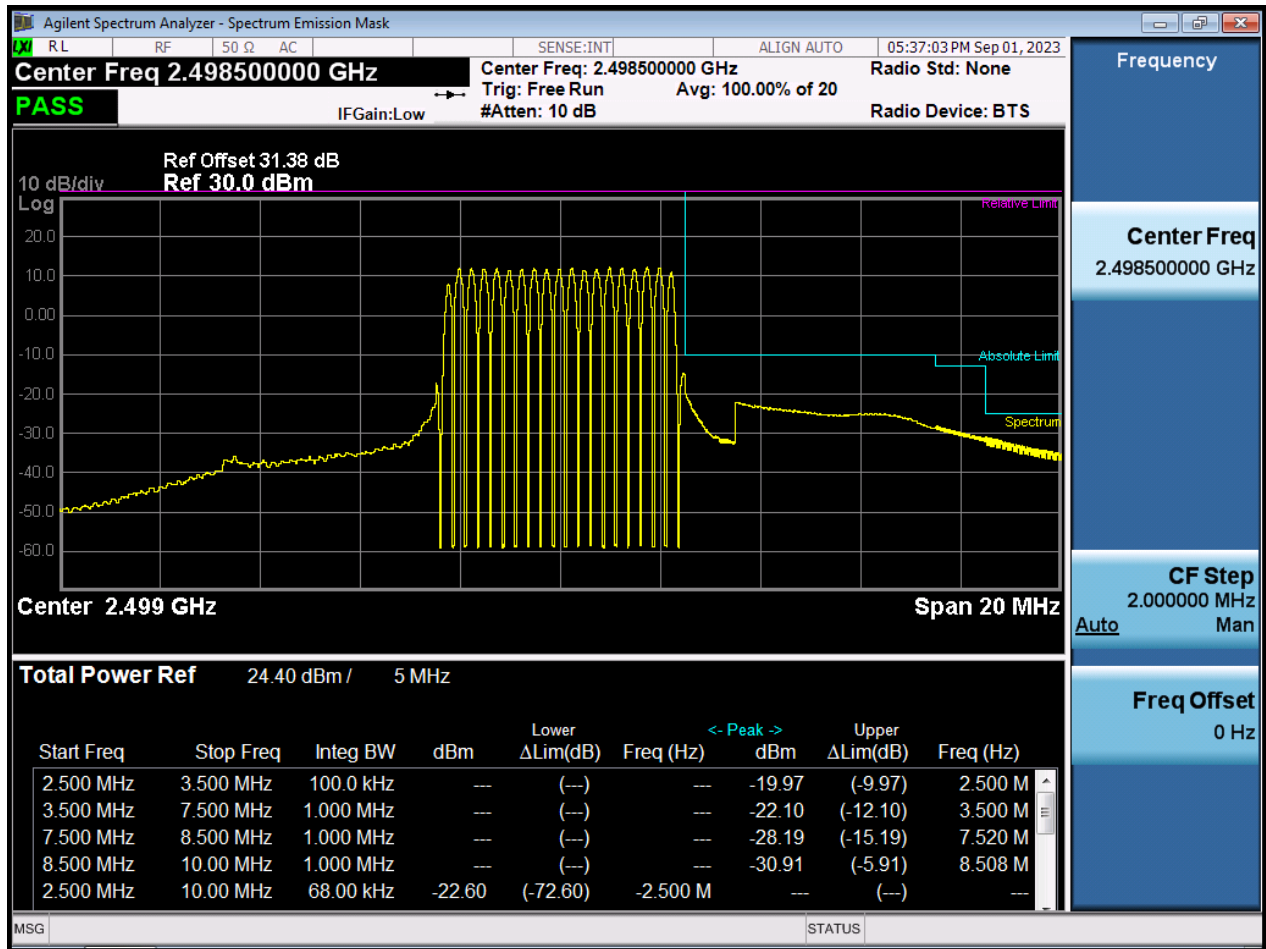


LTE41_5 M_BandEdge_Lower_Low_2498.5 MHz_QPSK_1RB

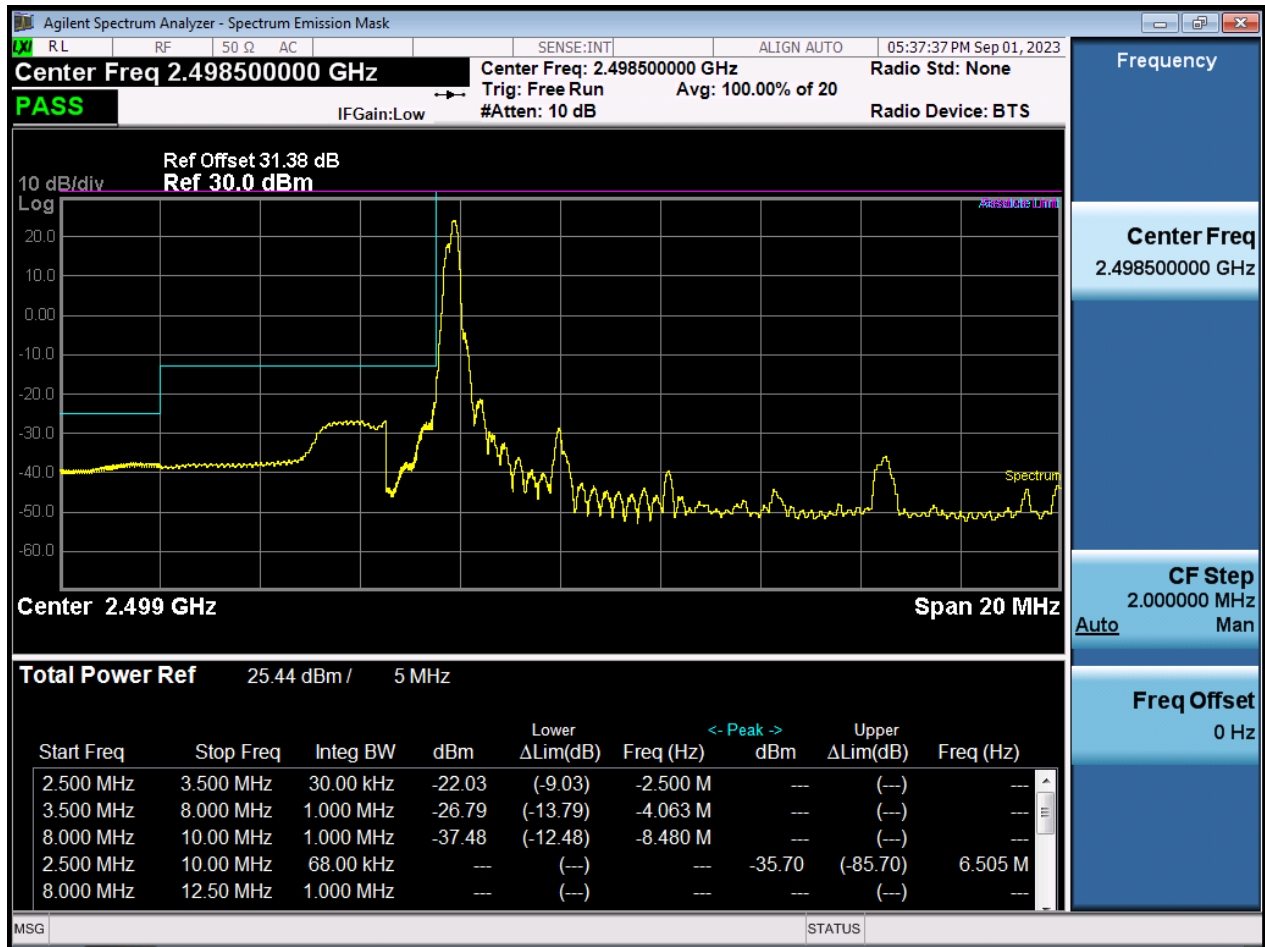


LTE41_5 M_BandEdge_Upper_Low_2498.5 MHz_QPSK_1RB

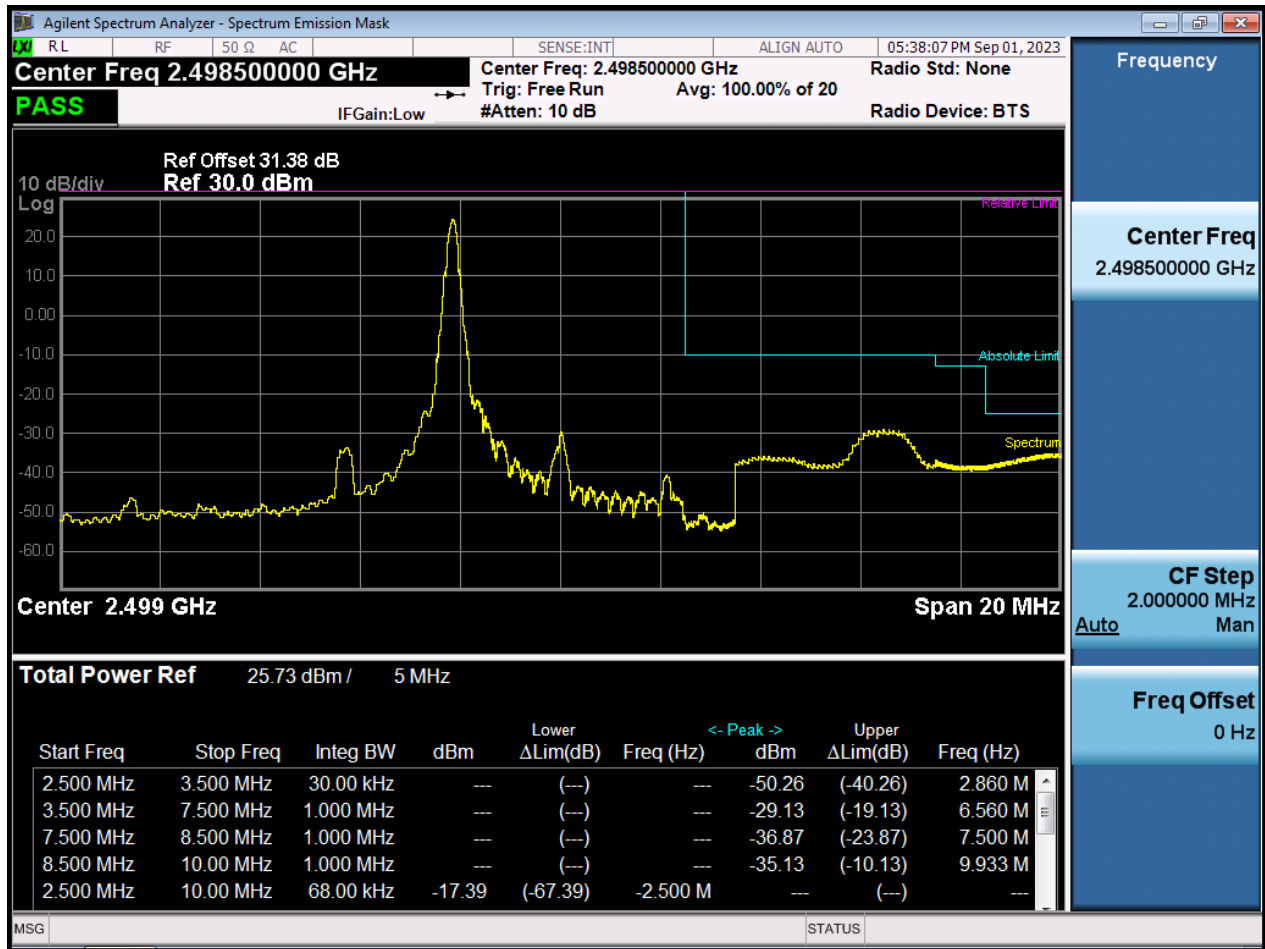


LTE41_5 M_BandEdge_Mid_2593 MHz_QPSK_Full RB

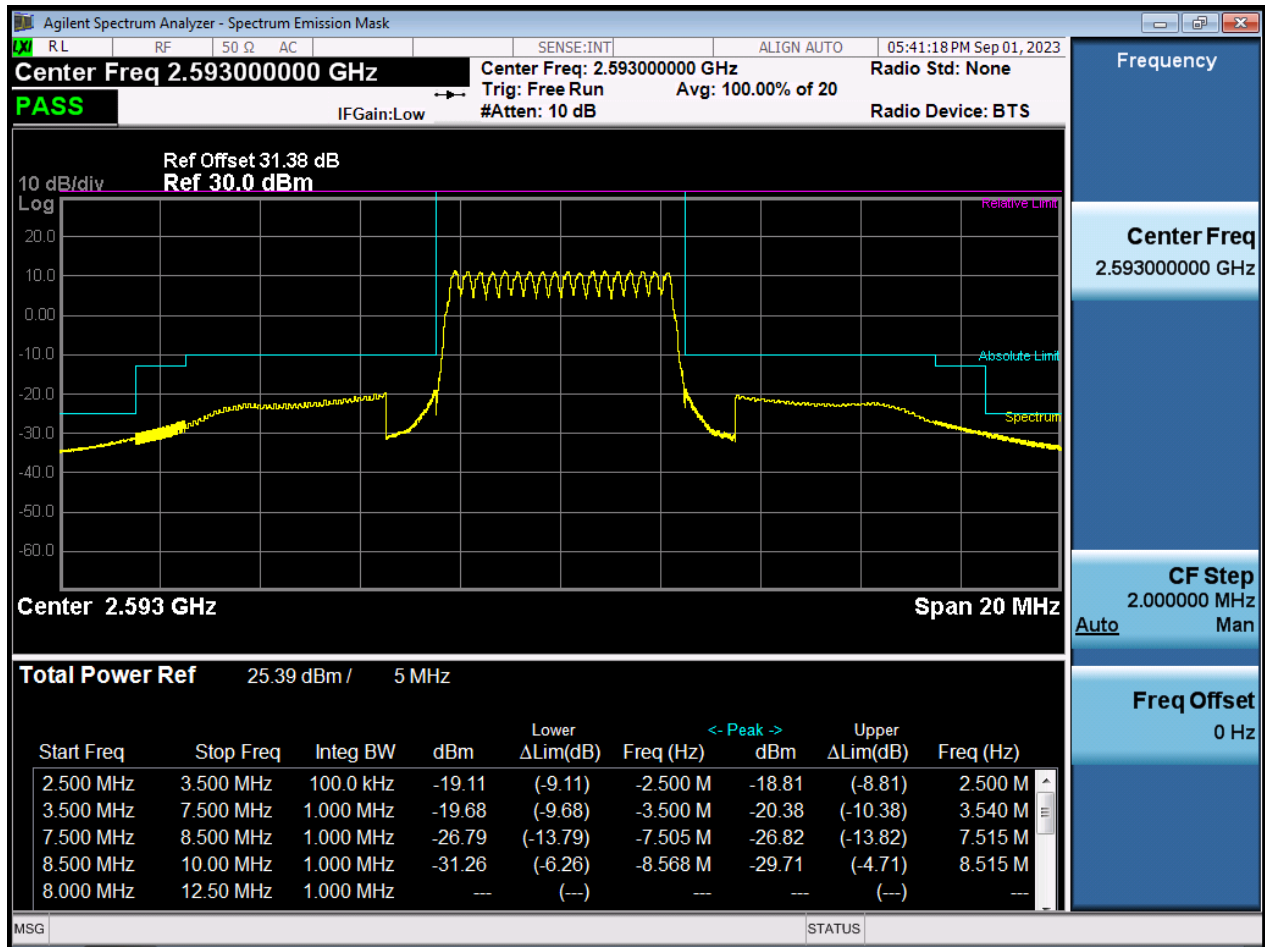


LTE41_5 M_BandEdge_High_2687.5 MHz_QPSK_Full RB

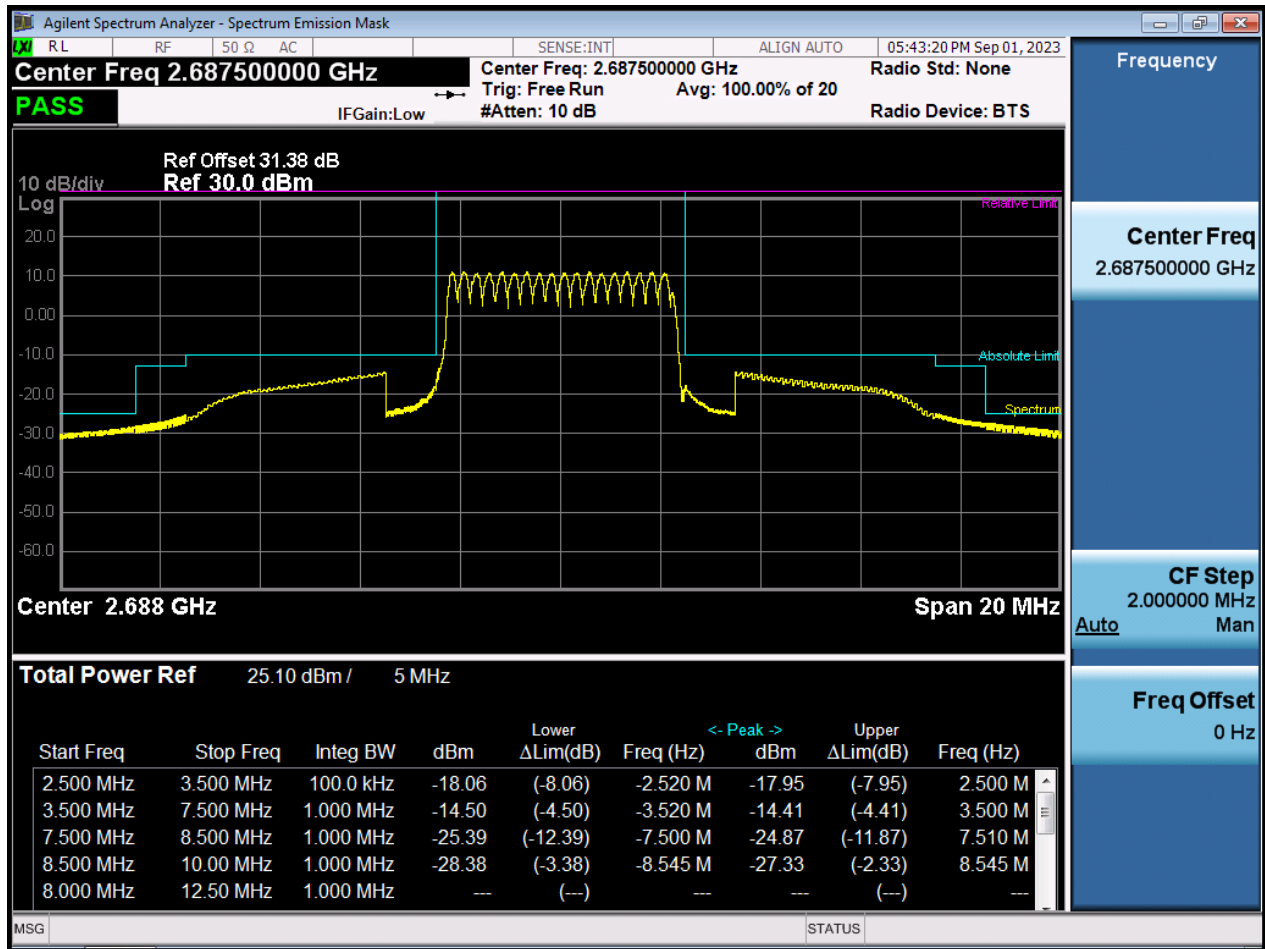


LTE41_5 M_BandEdge_High_2687.5 MHz_QPSK_1RB

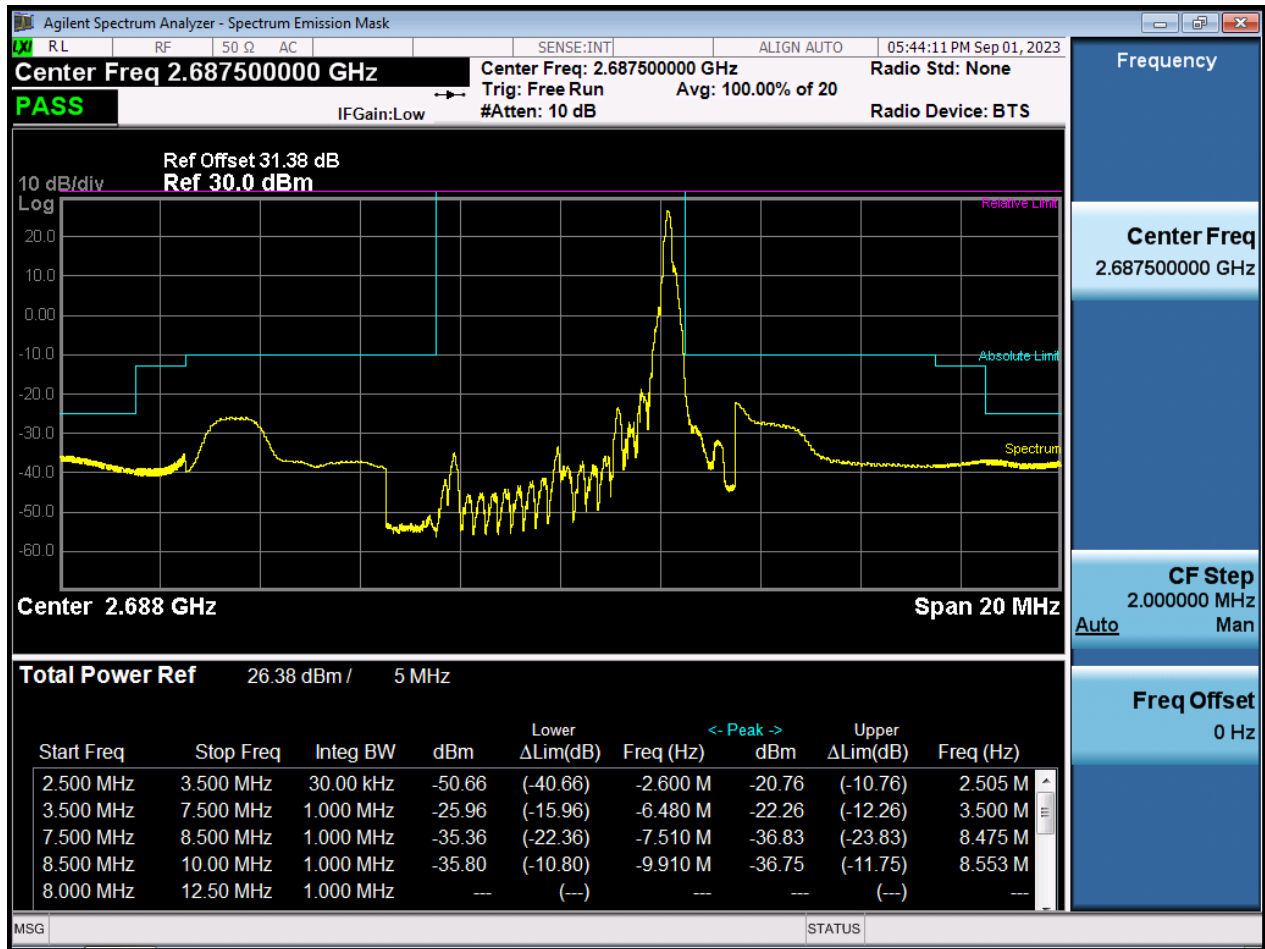


LTE41_10 M_BandEdge_Lower_Low_2501 MHz_QPSK_Full RB

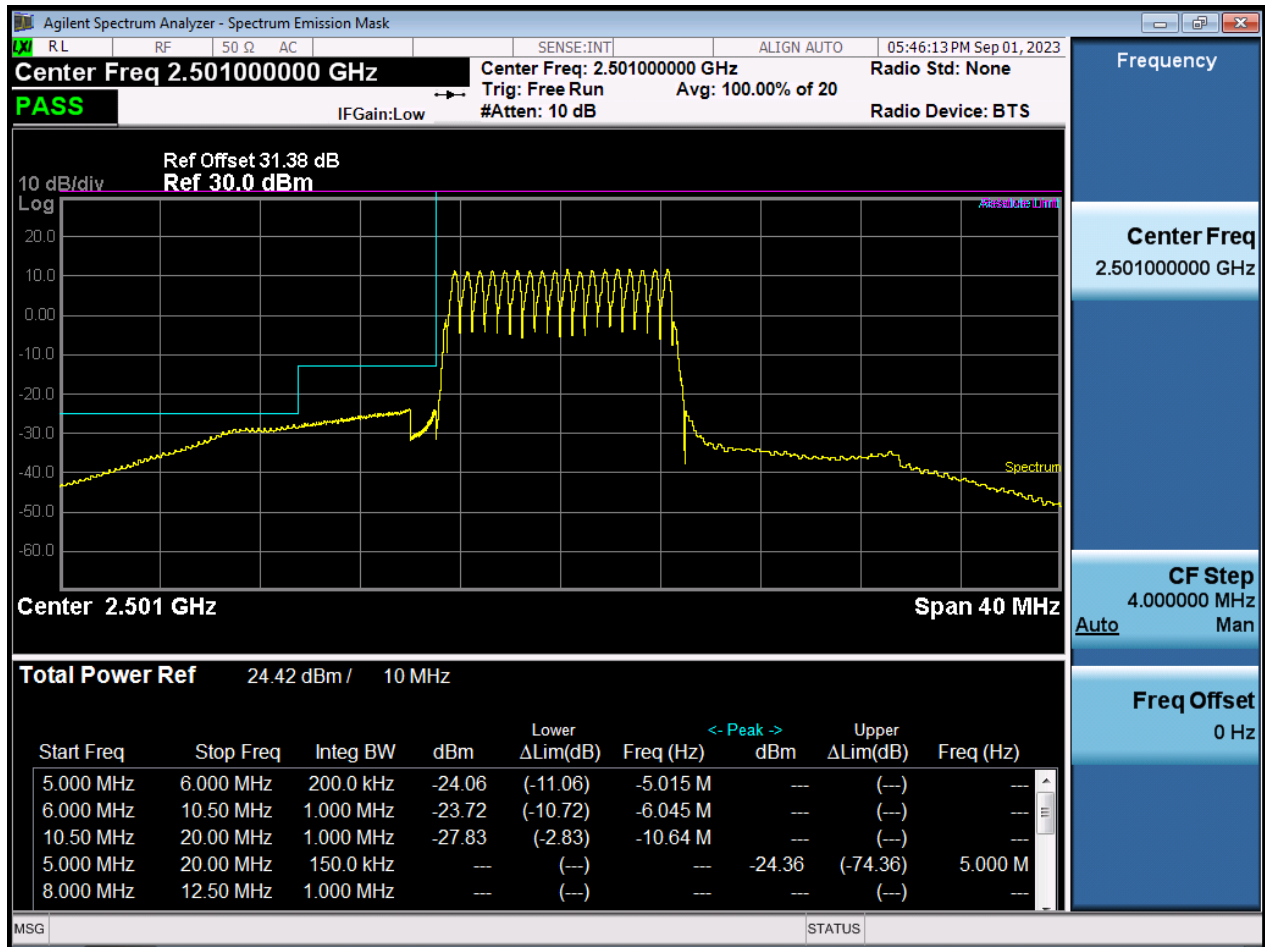


LTE41_10 M_BandEdge_Upper_Low_2501 MHz_QPSK_Full RB

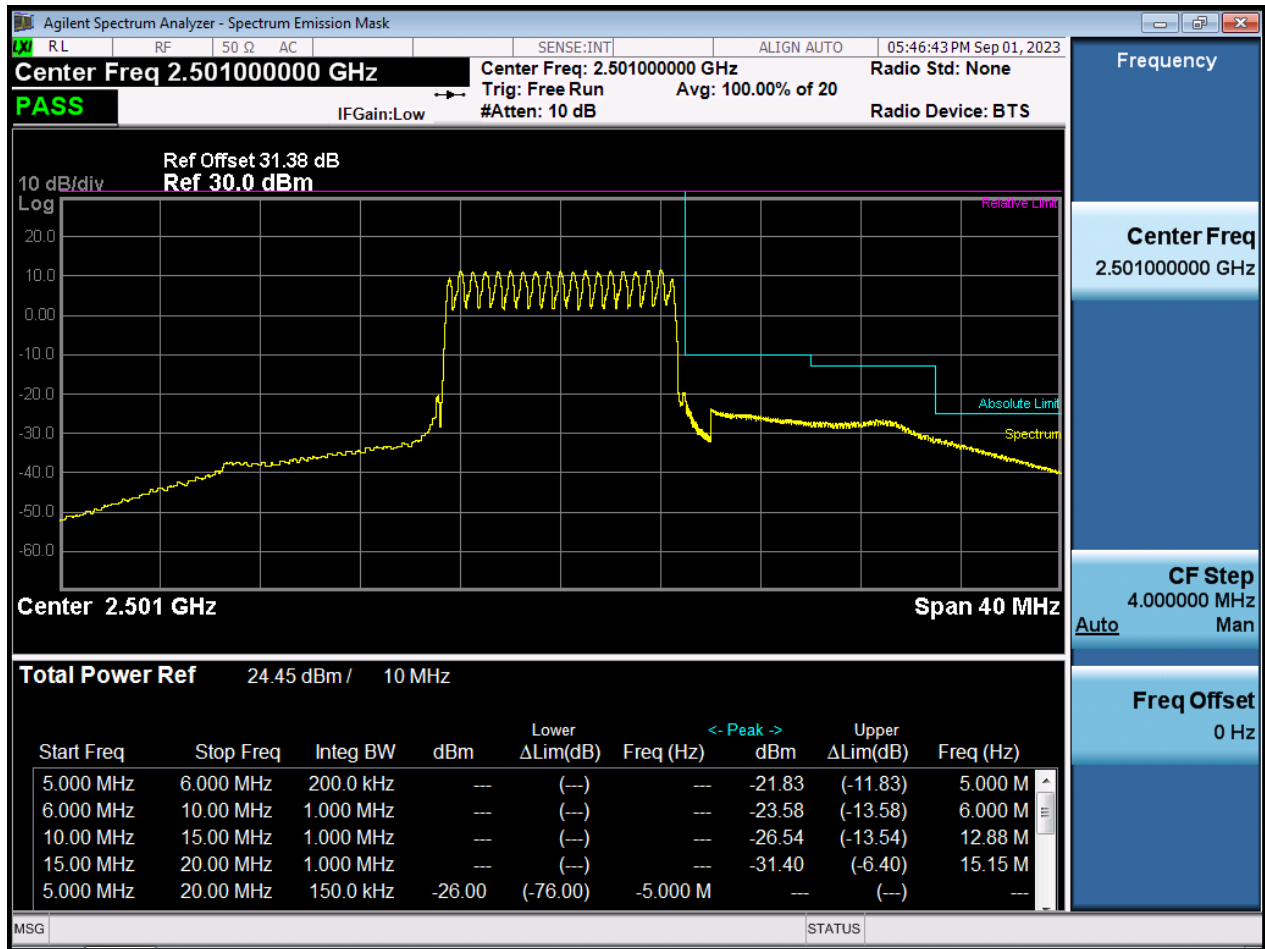


LTE41_10 M_BandEdge_Lower_Low_2501 MHz_QPSK_1RB

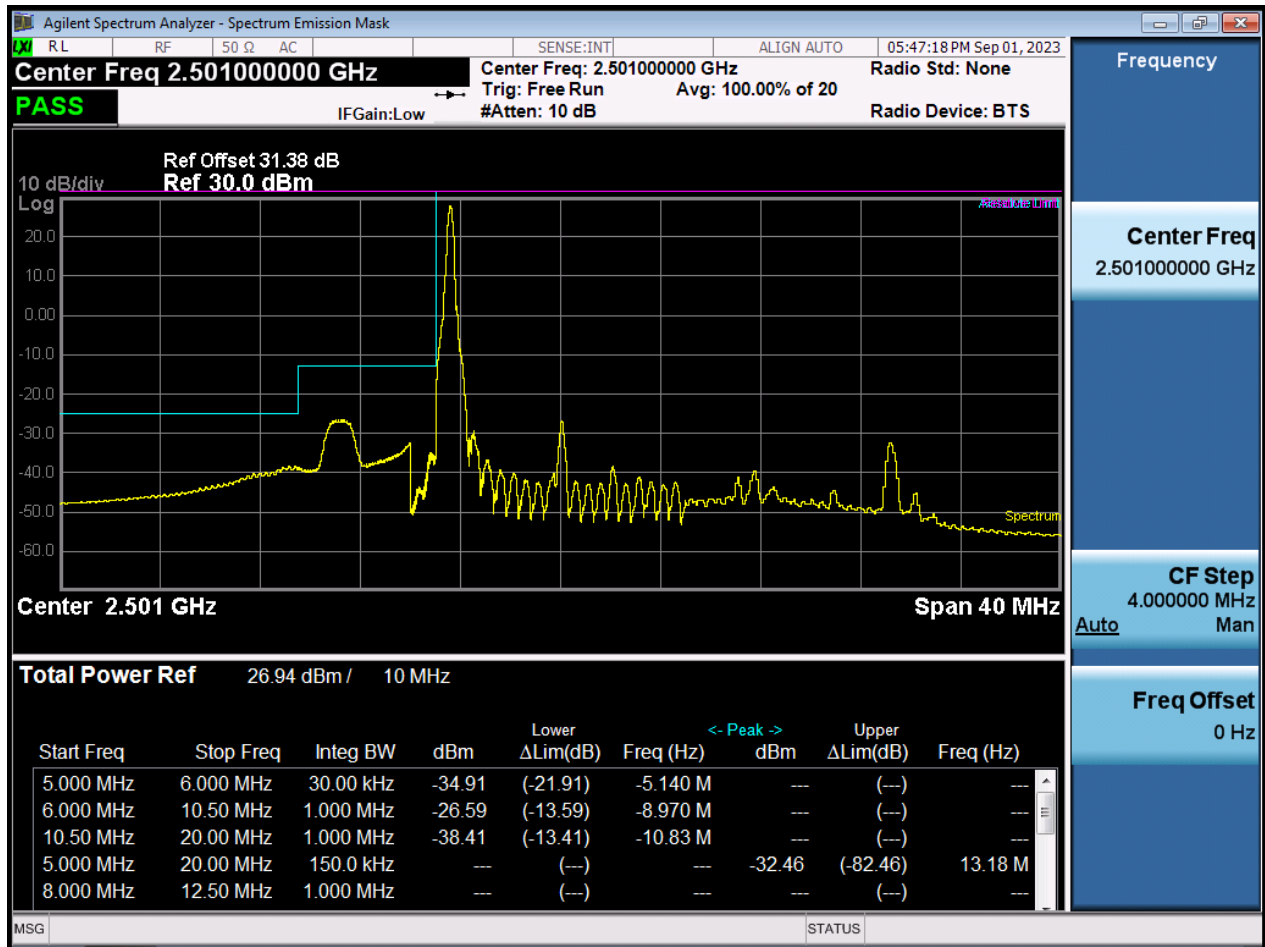


LTE41_10 M_BandEdge_Upper_Low_2501 MHz_QPSK_1RB

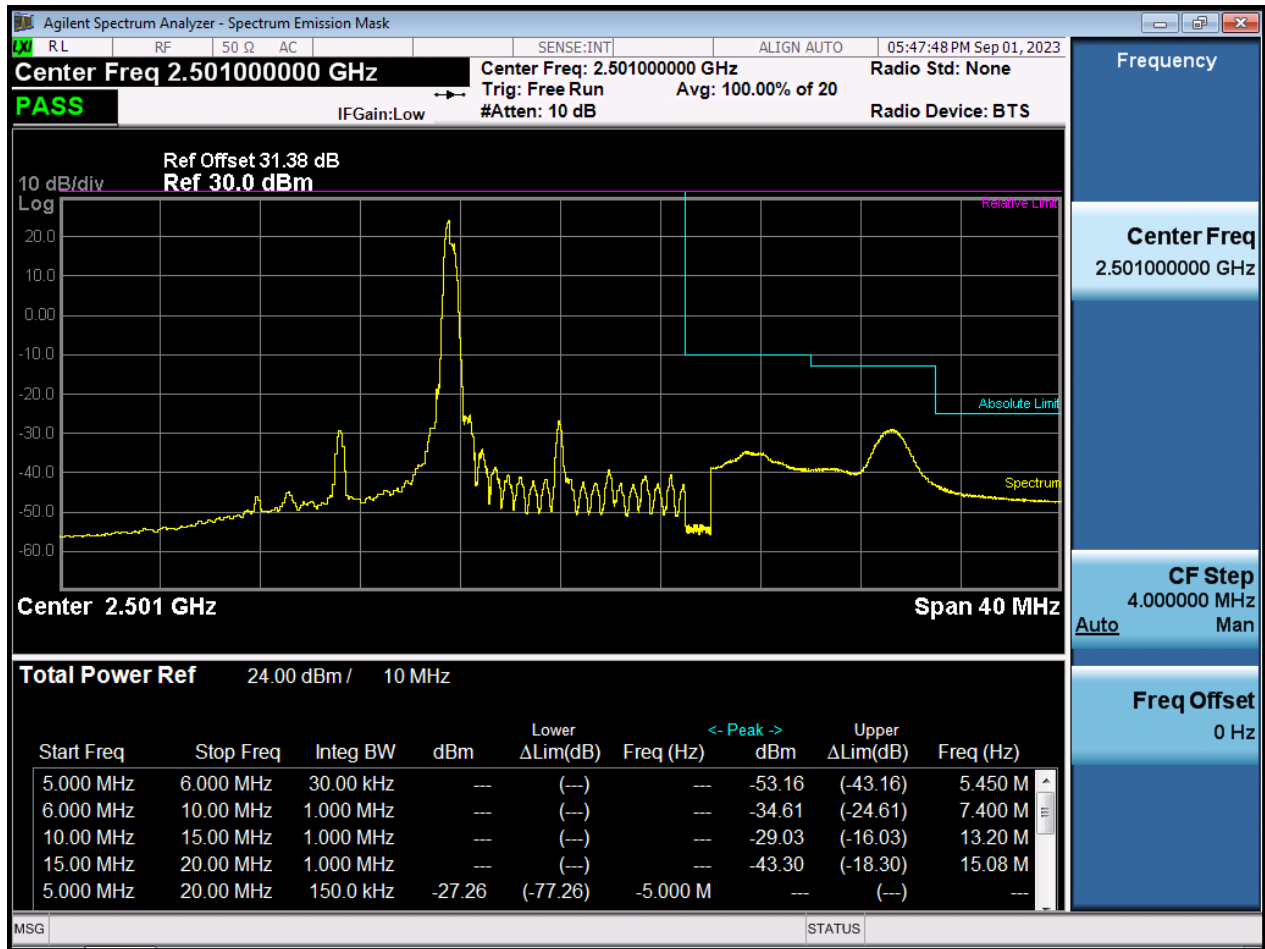


LTE41_10 M_BandEdge_Mid_2593 MHz_QPSK_Full RB

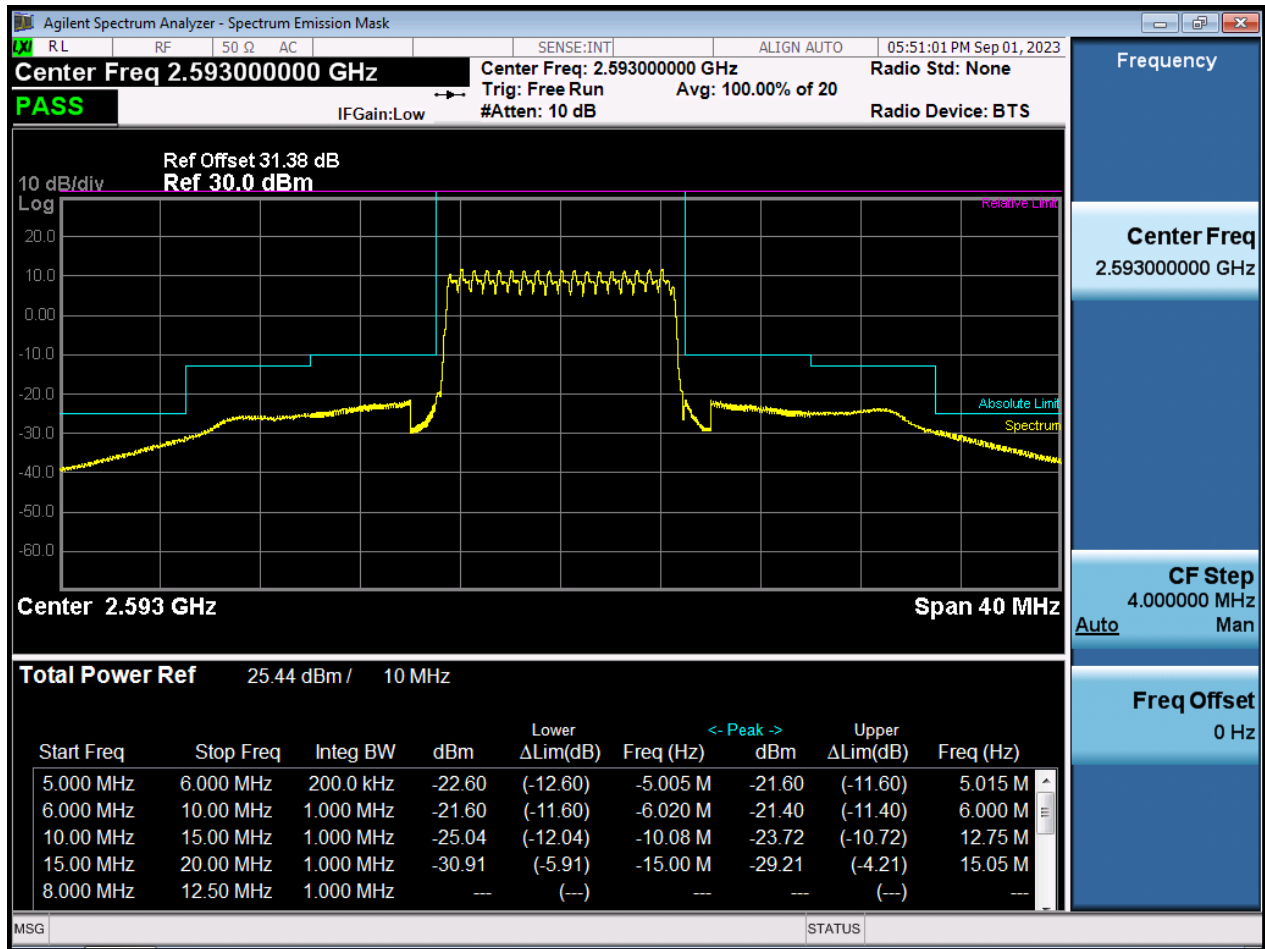


LTE41_10 M_BandEdge_High_2685 MHz_QPSK_Full RB

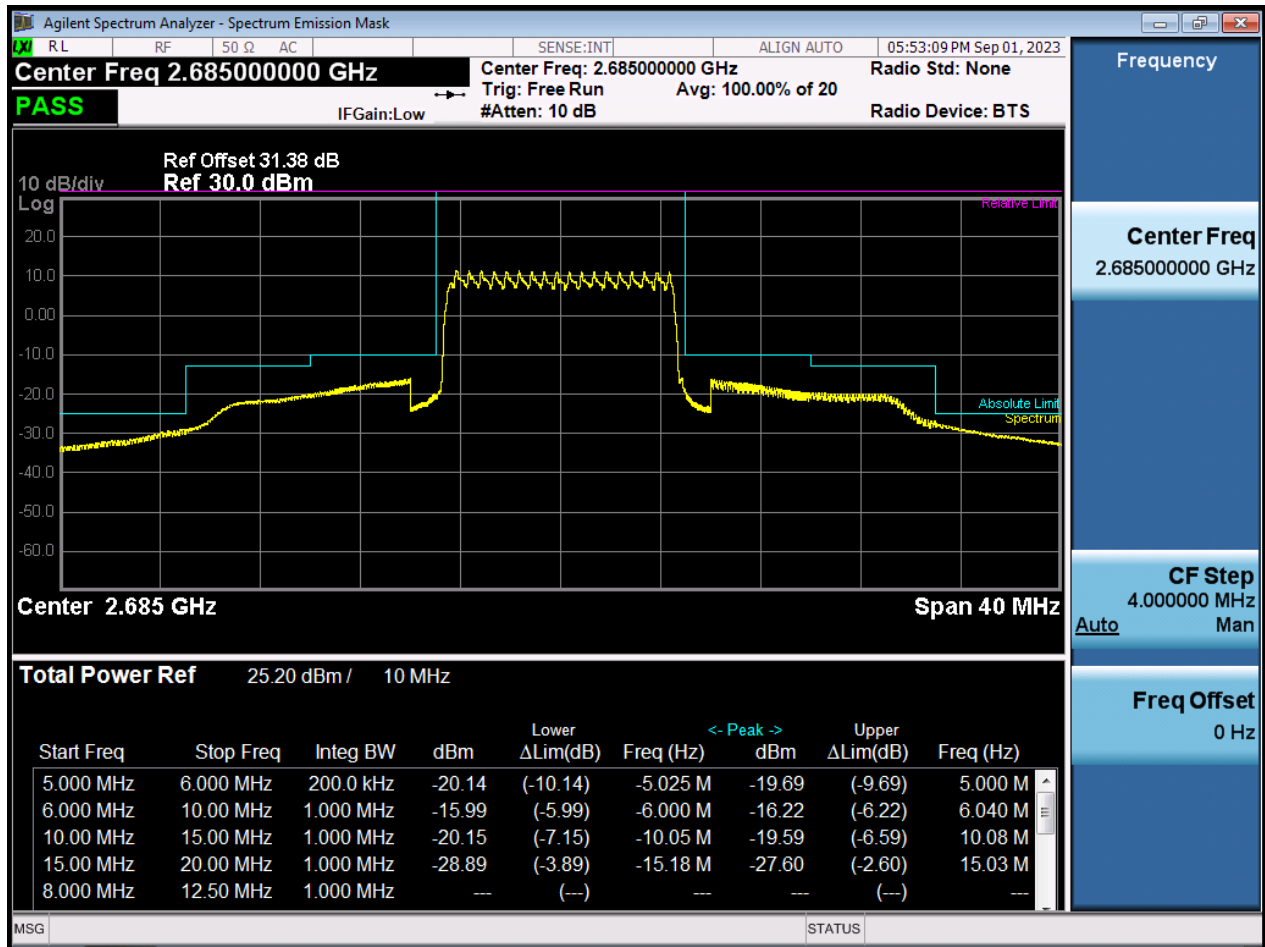


LTE41_10 M_BandEdge_High_2685 MHz_QPSK_1RB

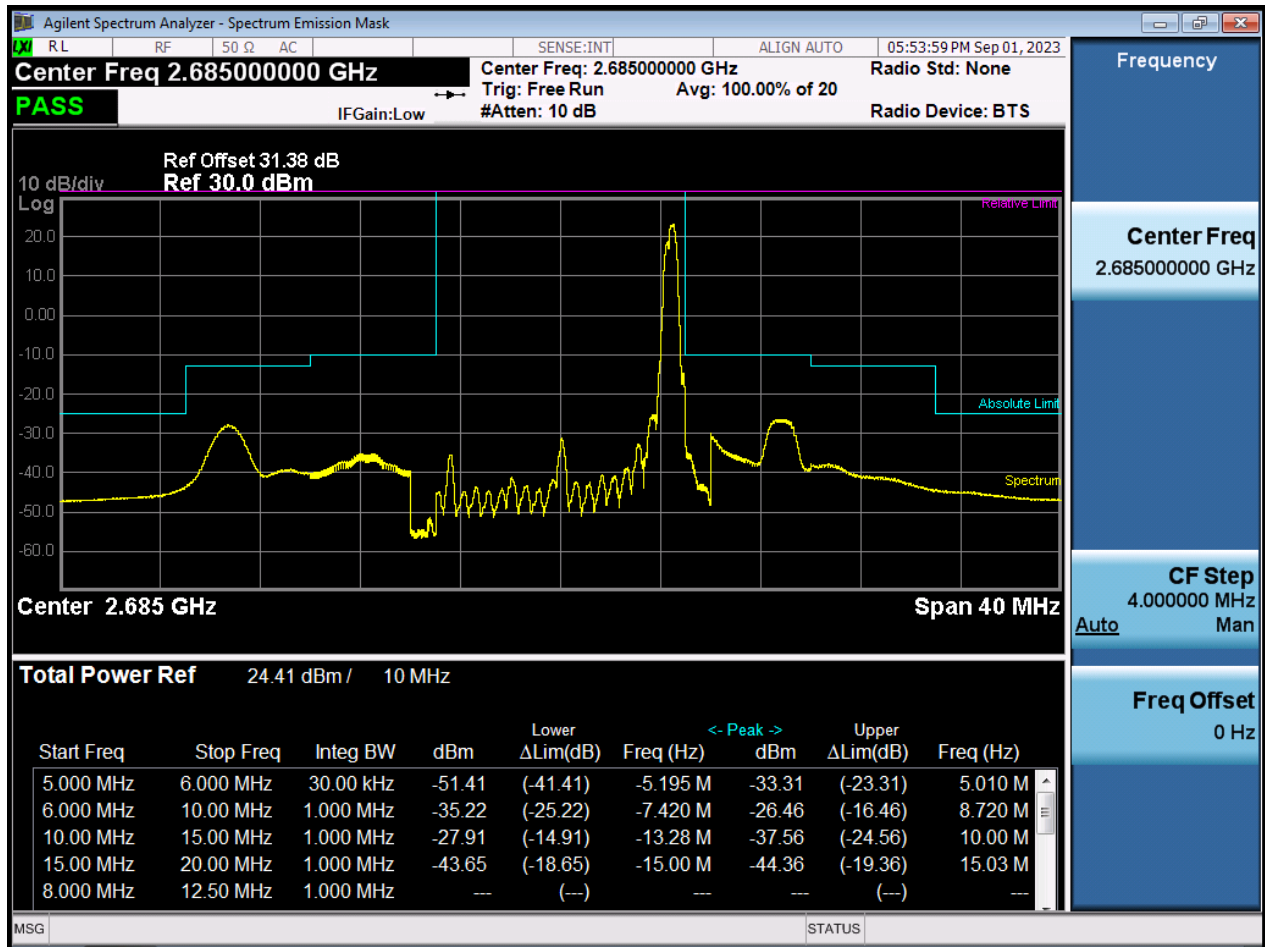


LTE41_15 M_BandEdge_Lower_Low_2503.5 MHz_QPSK_Full RB

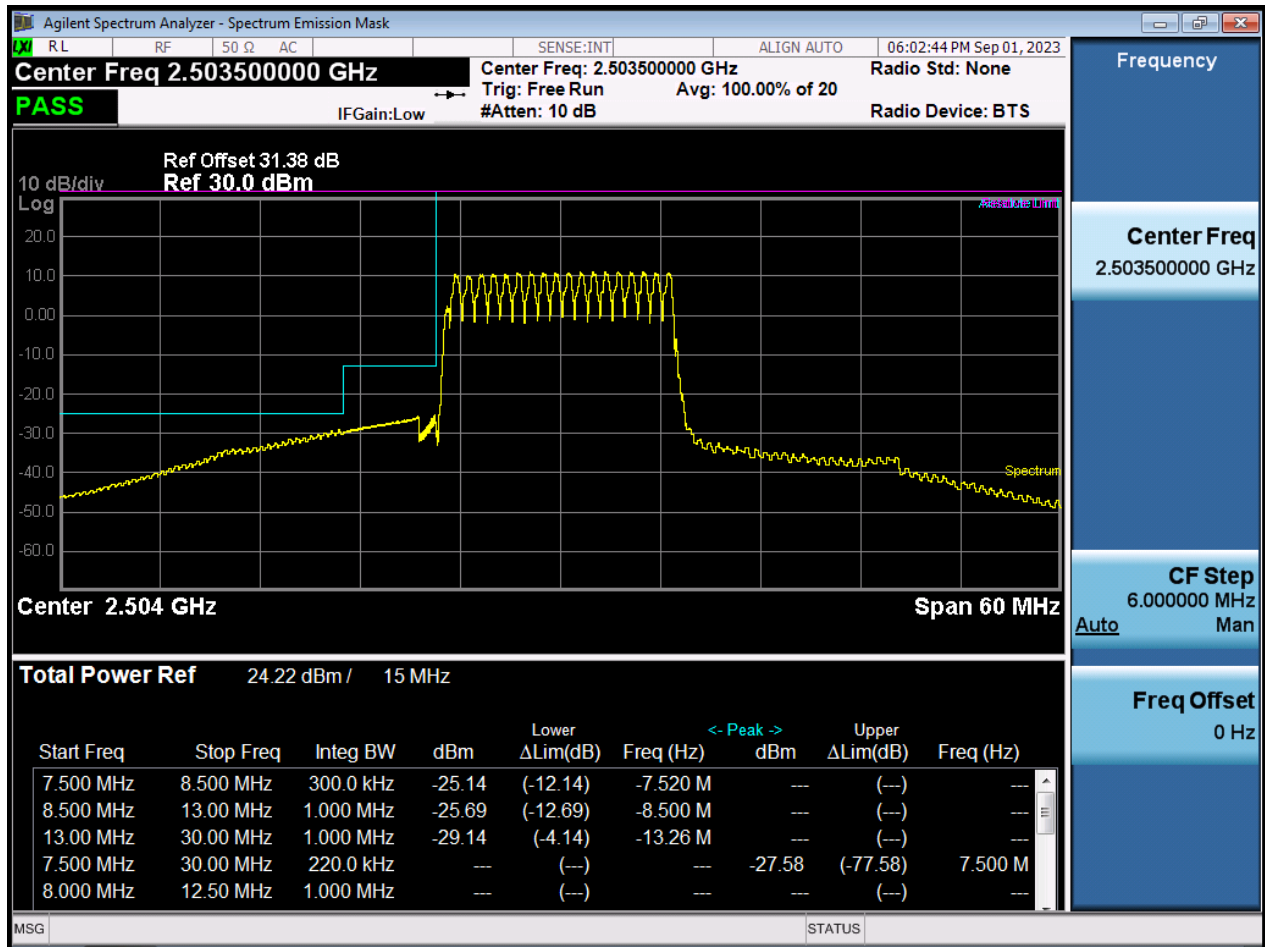


LTE41_15 M_BandEdge_Upper_Low_2503.5 MHz_QPSK_Full RB

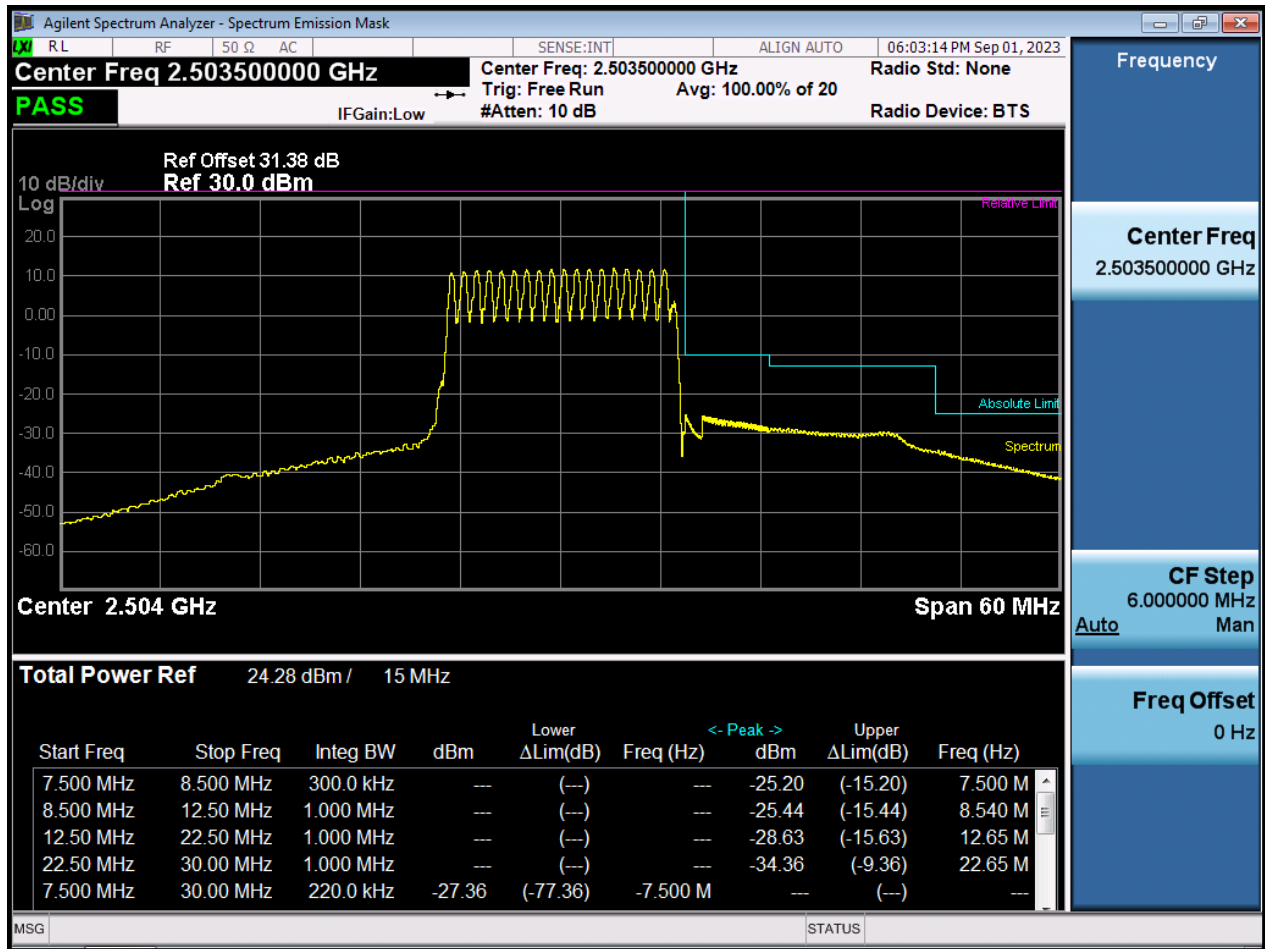


LTE41_15 M_BandEdge_Lower_Low_2503.5 MHz_QPSK_1RB

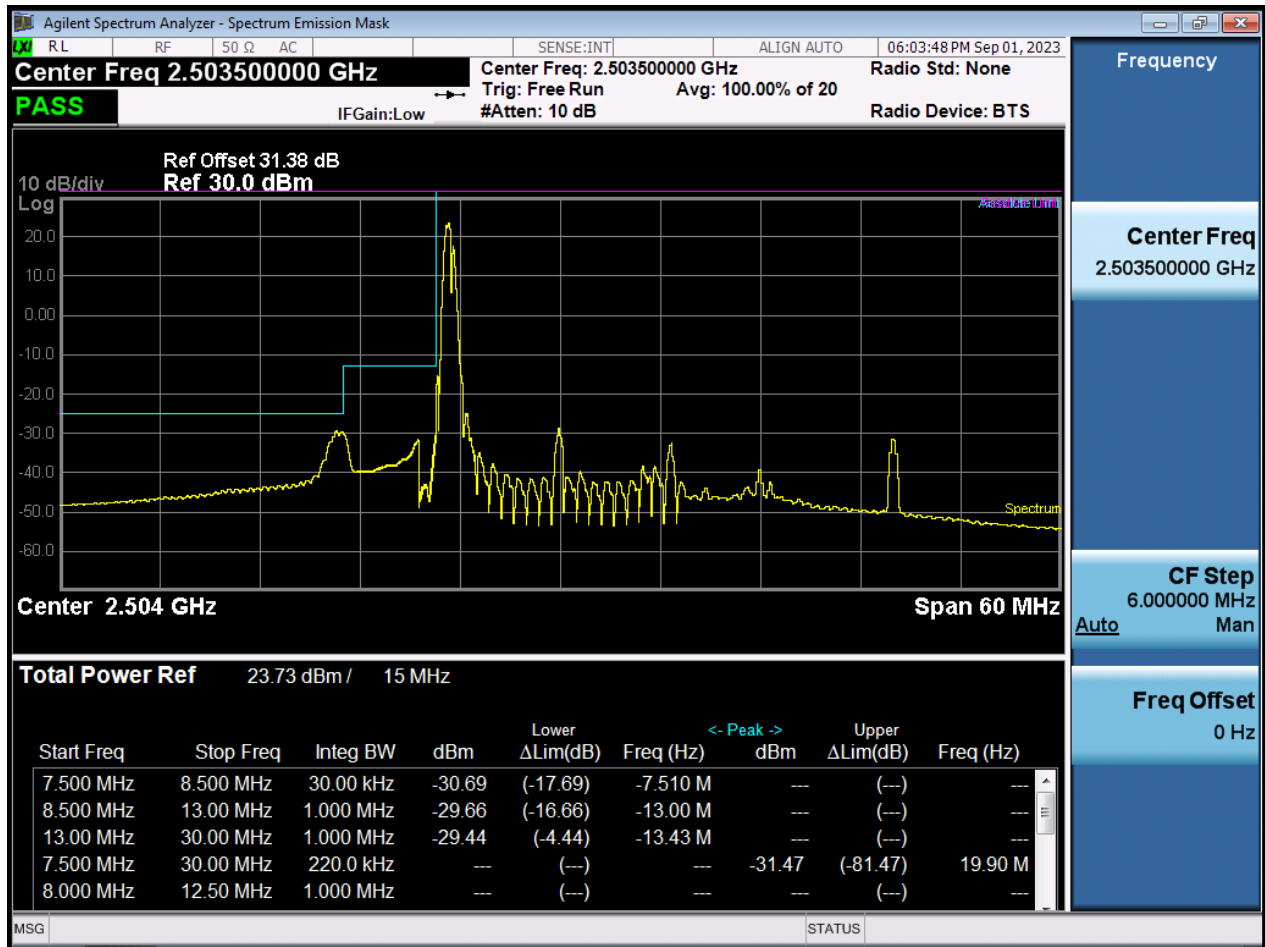


LTE41_15 M_BandEdge_Upper_Low_2503.5 MHz_QPSK_1RB

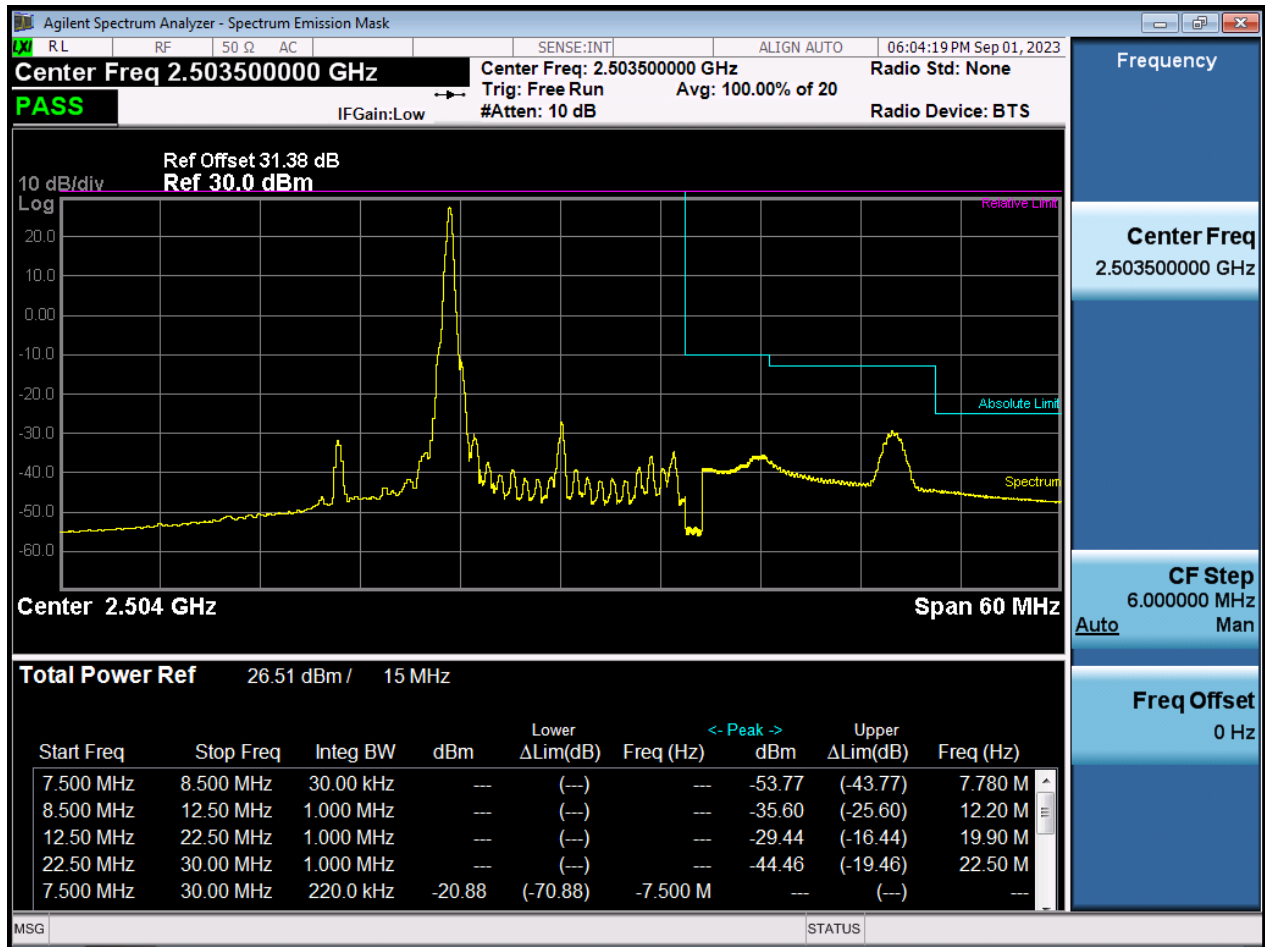


LTE41_15 M_BandEdge_Mid_2593 MHz_QPSK_Full RB

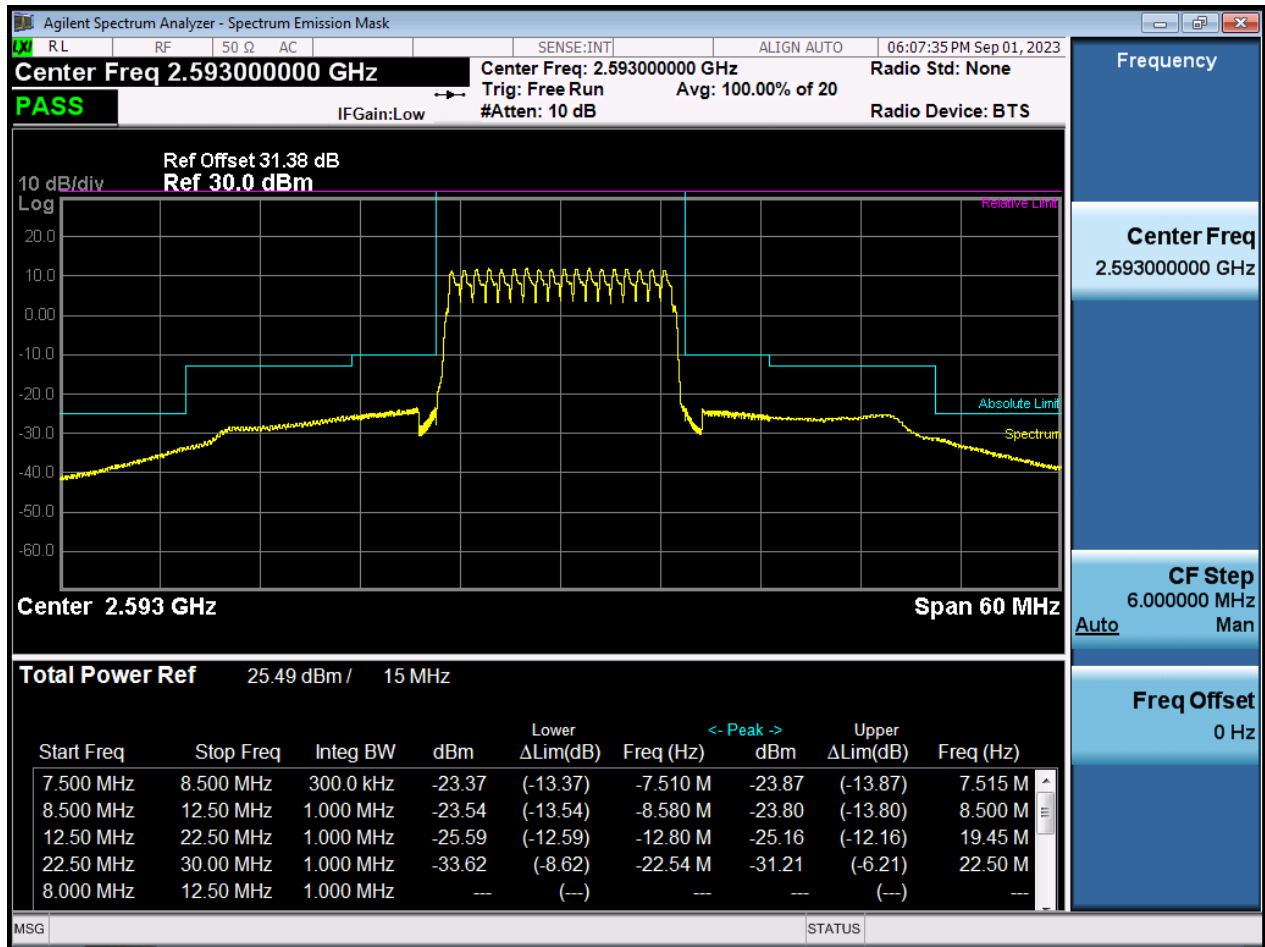


LTE41_15 M_BandEdge_High_2682.5 MHz_QPSK_Full RB

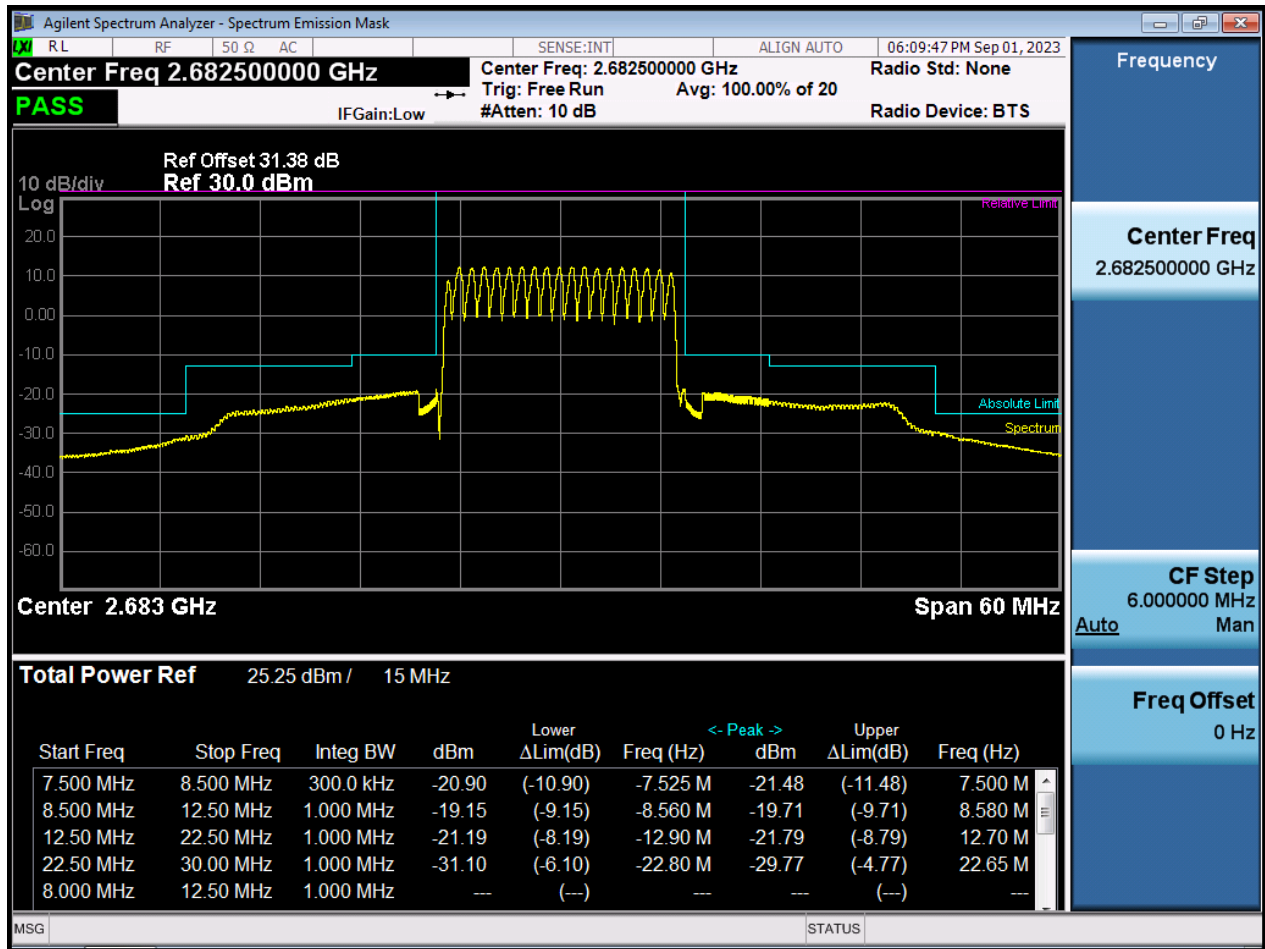


LTE41_15 M_BandEdge_High_2682.5 MHz_QPSK_1RB

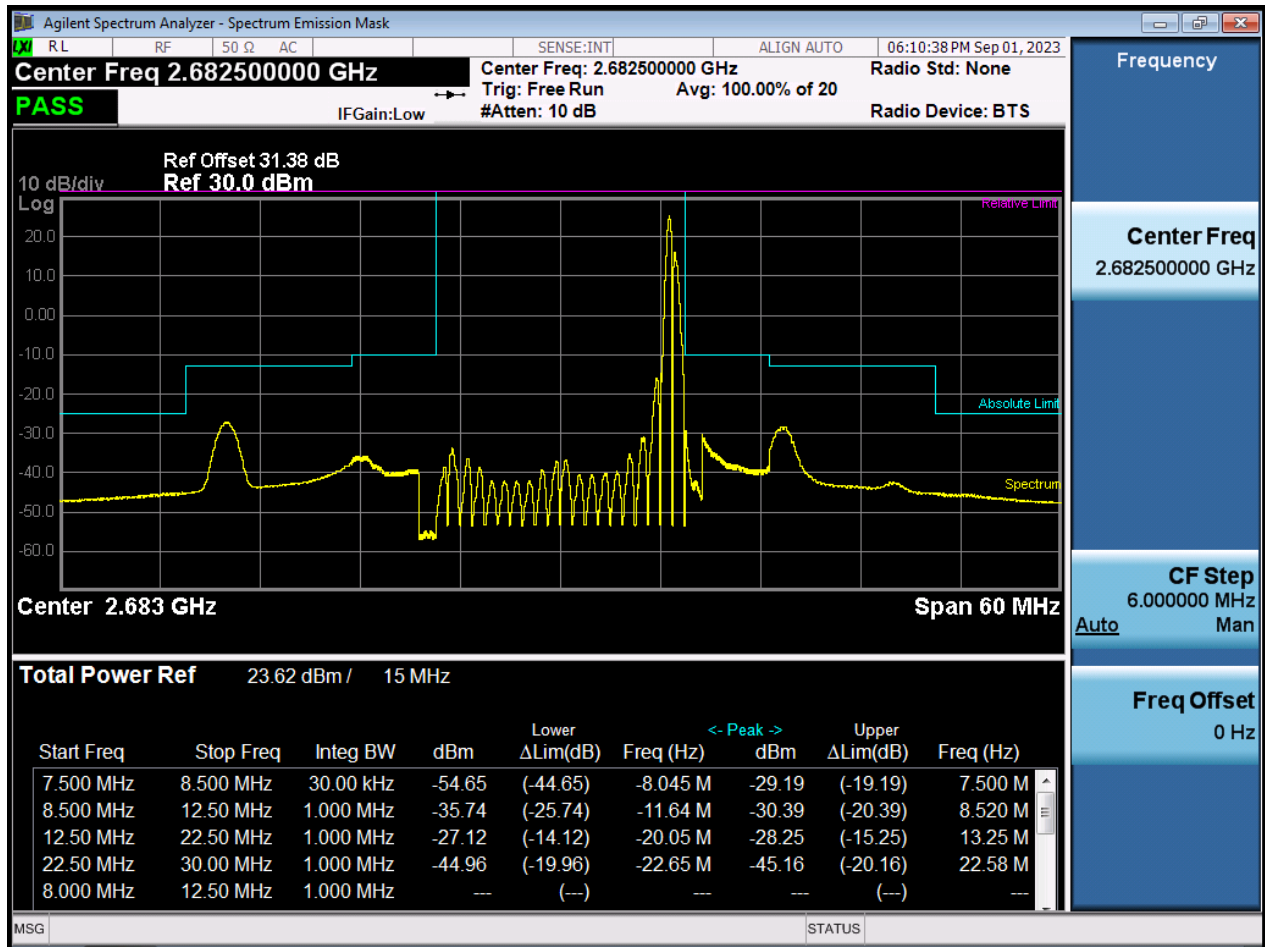


LTE41_20 M_BandEdge_Lower_Low_2506 MHz_QPSK_Full RB

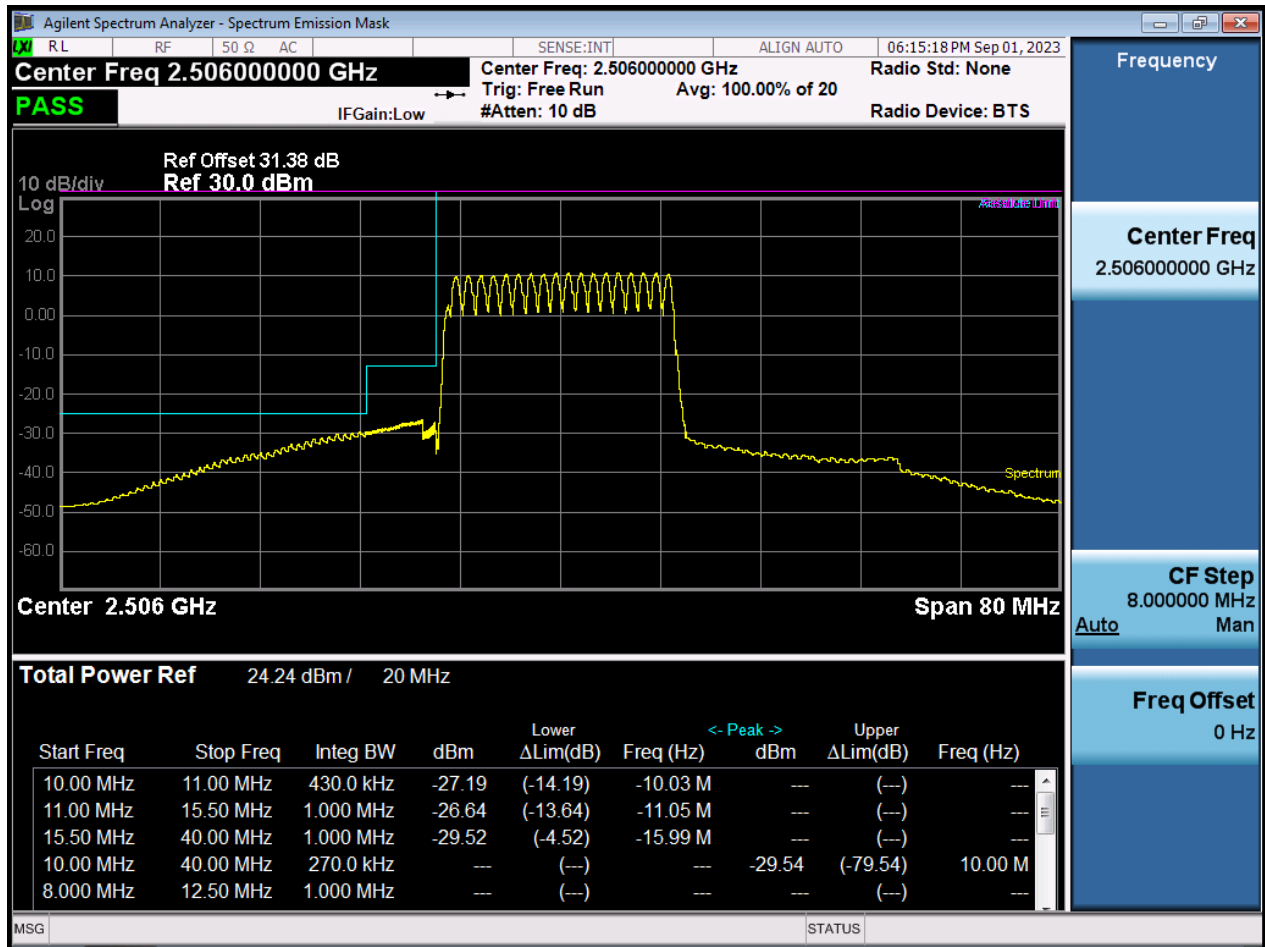


LTE41_20 M_BandEdge_Upper_Low_2506 MHz_QPSK_Full RB

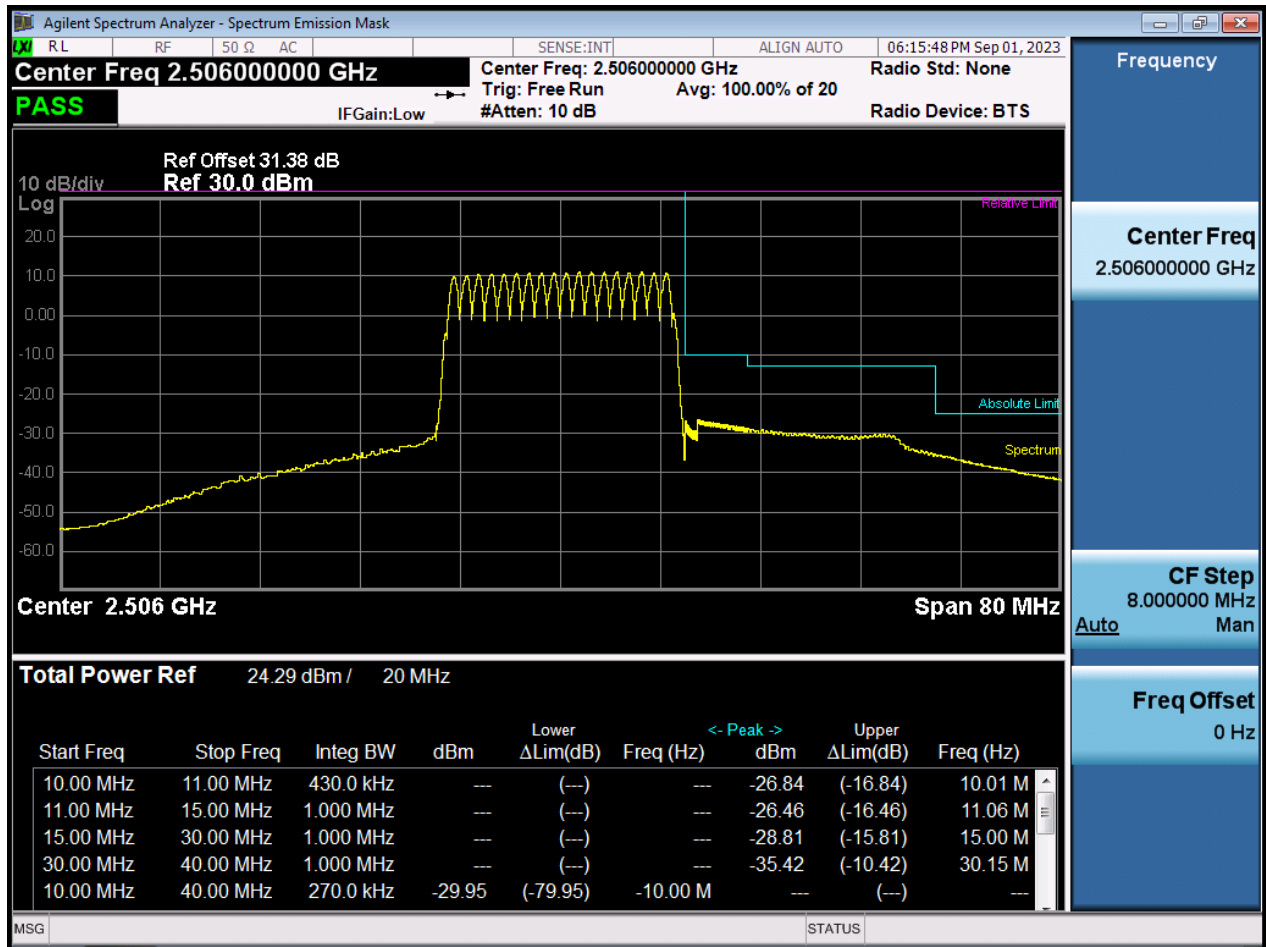


LTE41_20 M_BandEdge_Lower_Low_2506 MHz_QPSK_1RB

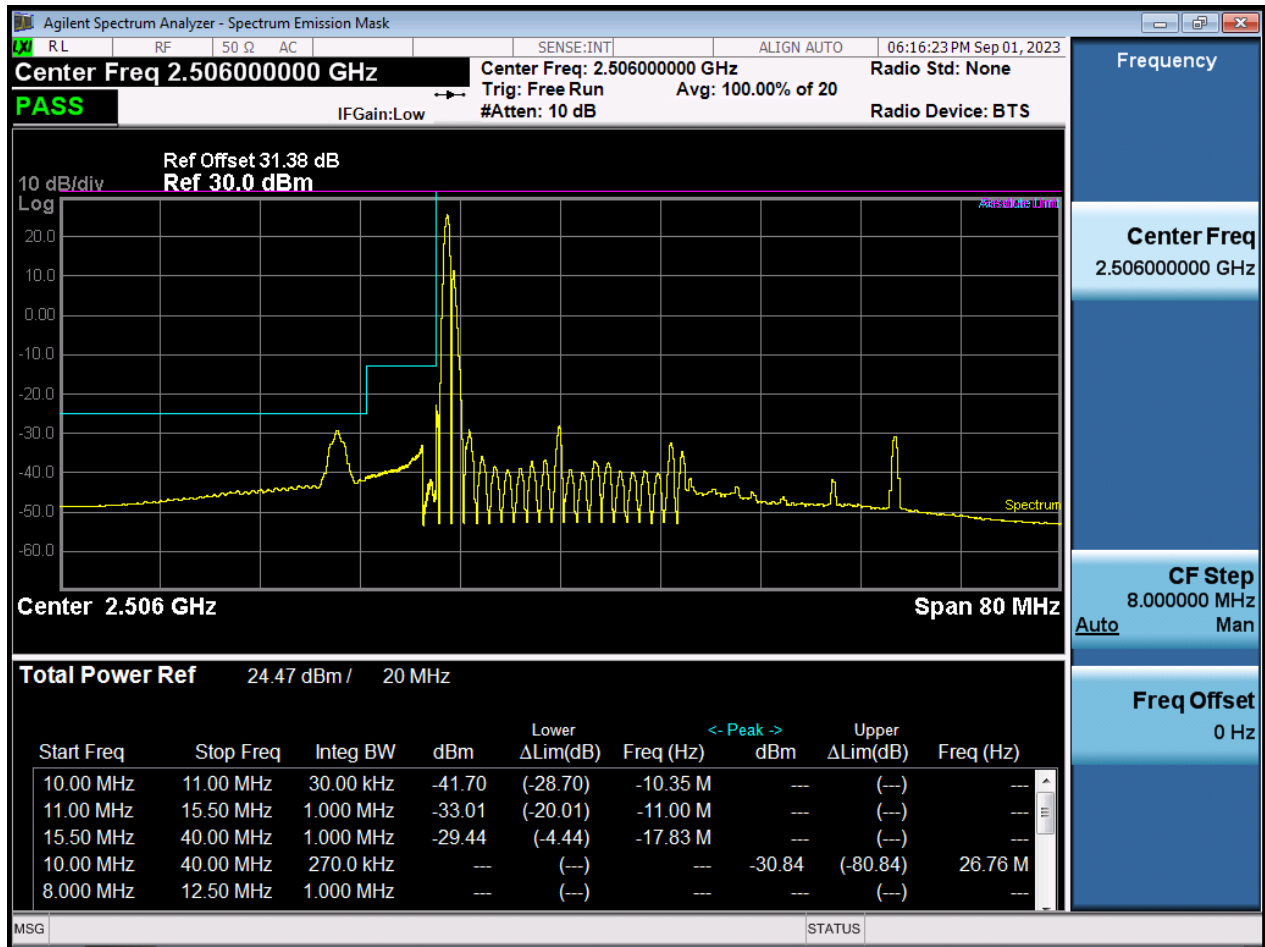


LTE41_20 M_BandEdge_Upper_Low_2506 MHz_QPSK_1RB

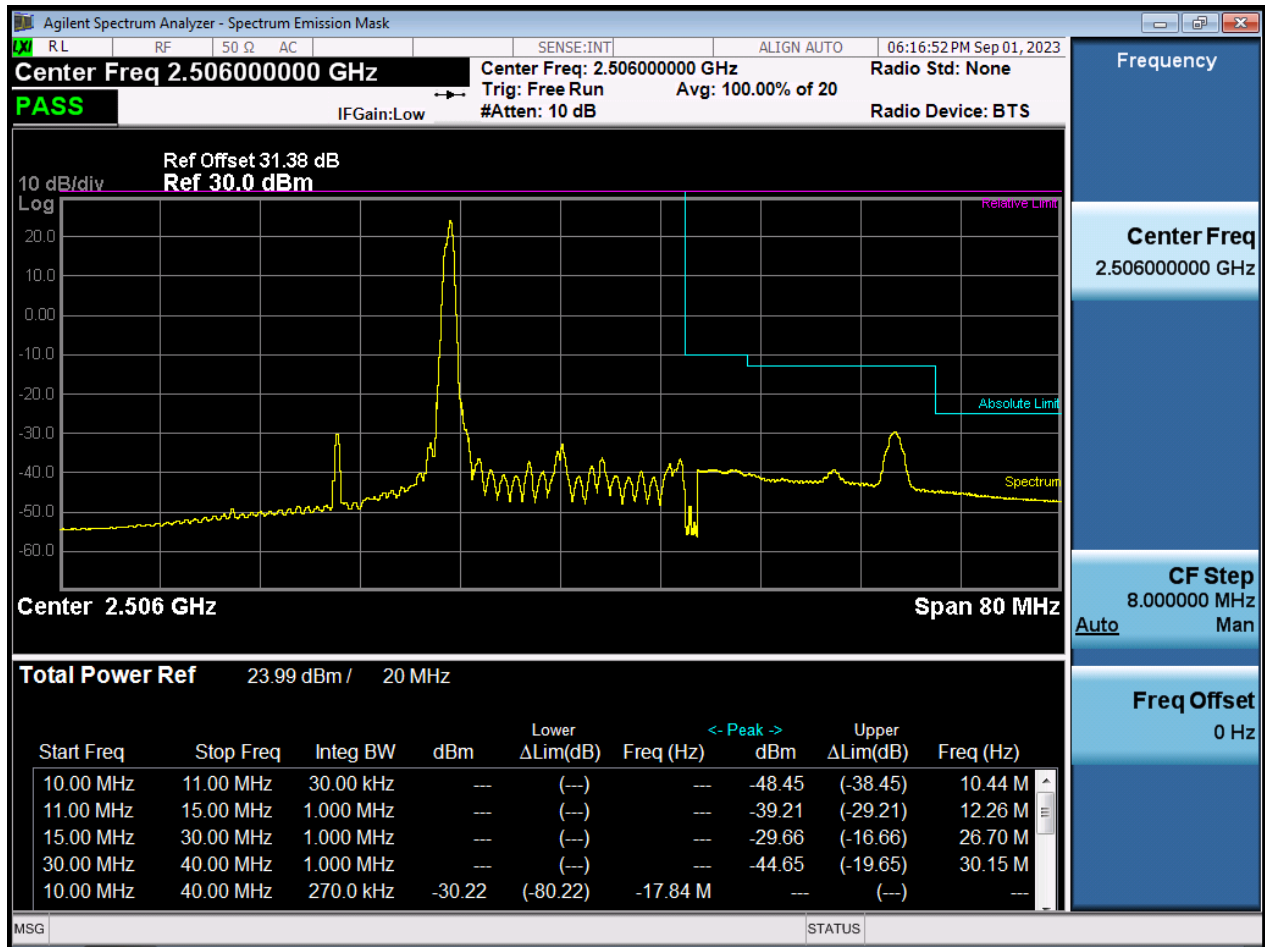


LTE41_20 M_BandEdge_Mid_2593 MHz_QPSK_Full RB

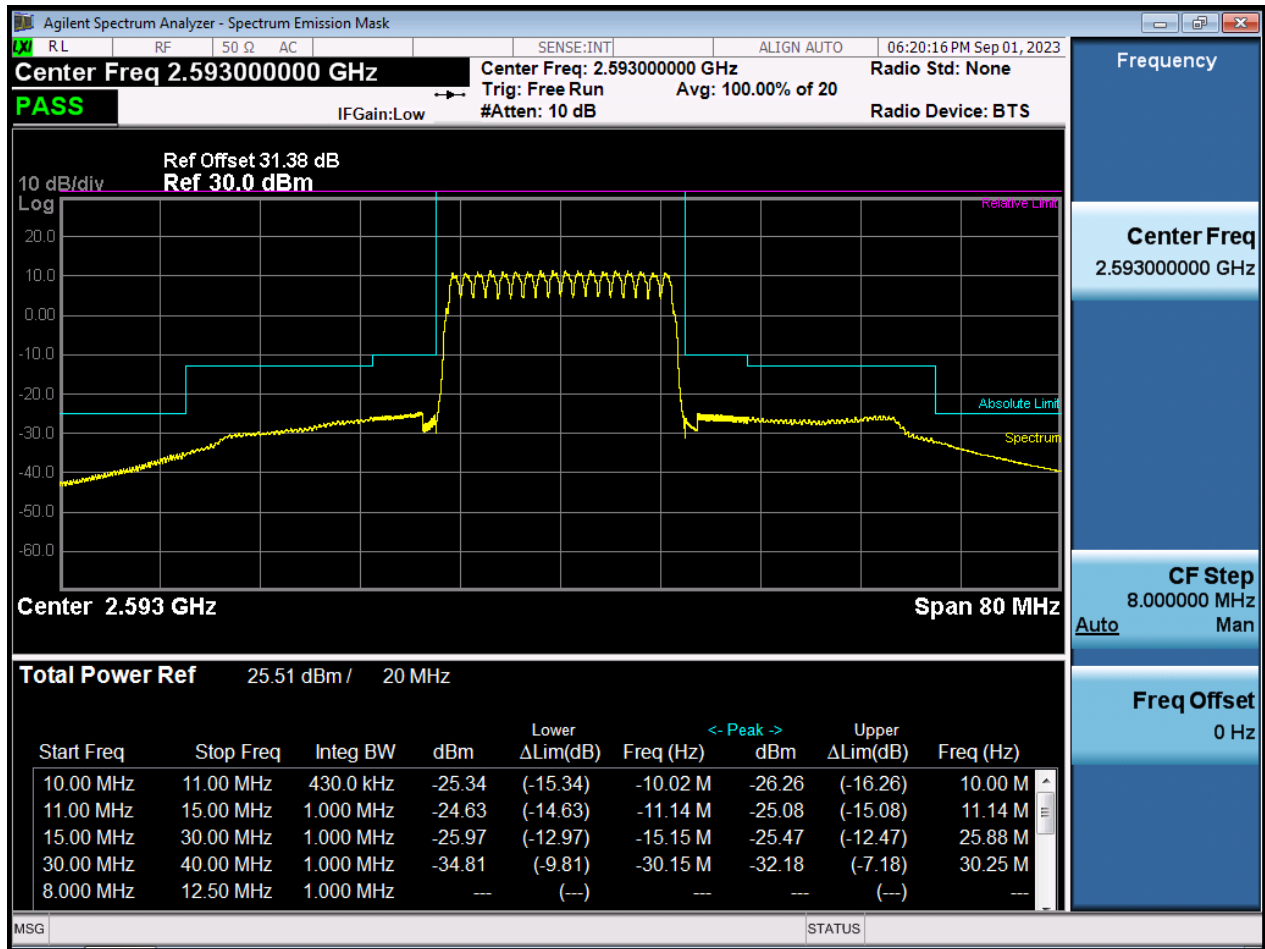


LTE41_20 M_BandEdge_High_2680 MHz_QPSK_Full RB

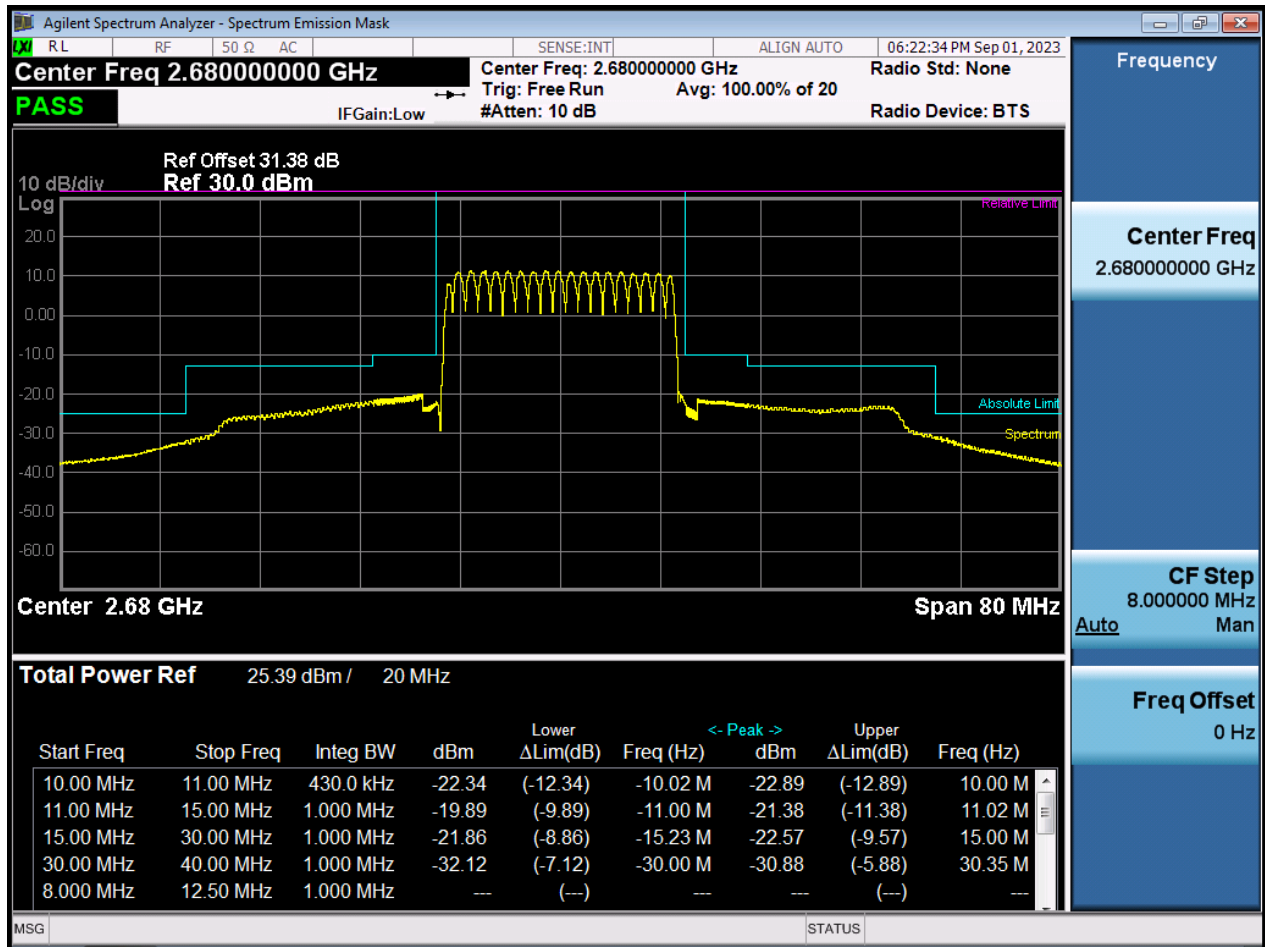


LTE41_20 M_BandEdge_High_2680 MHz_QPSK_1RB

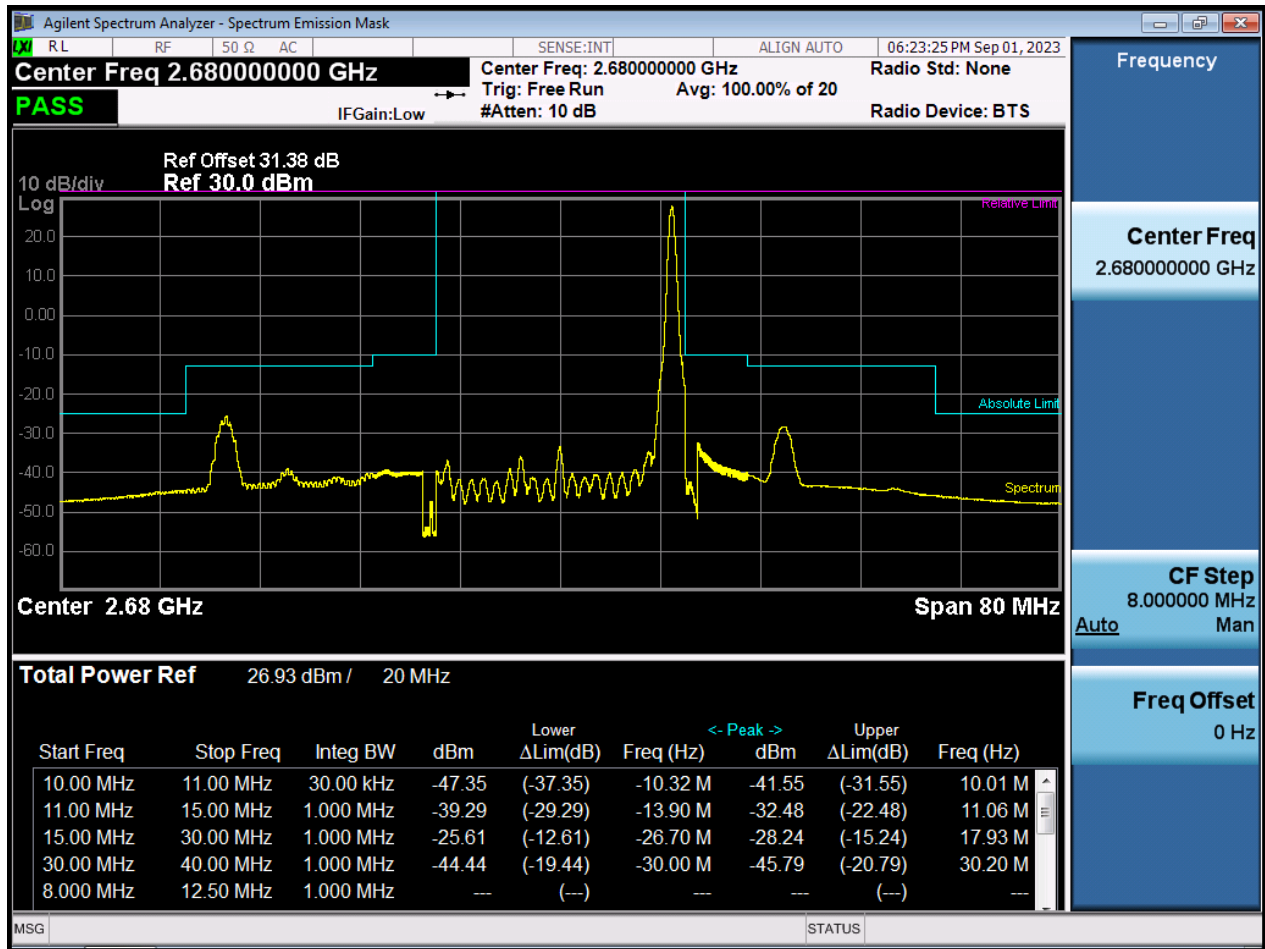


LTE41_5 M_OBW_Mid Channel_QPSK_Full RB

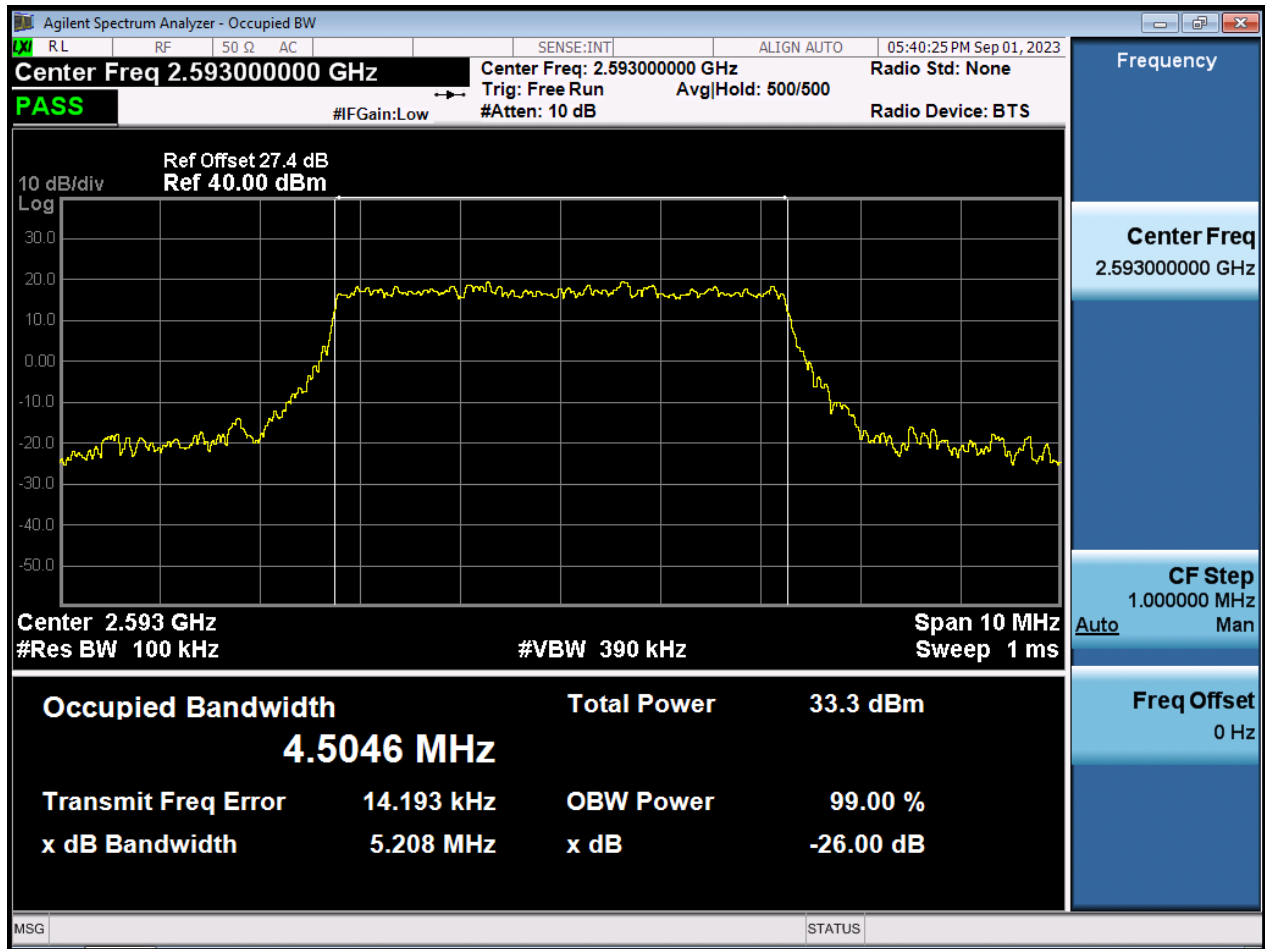


LTE41_5 M_OBW_Mid Channel_16QAM_Full RB

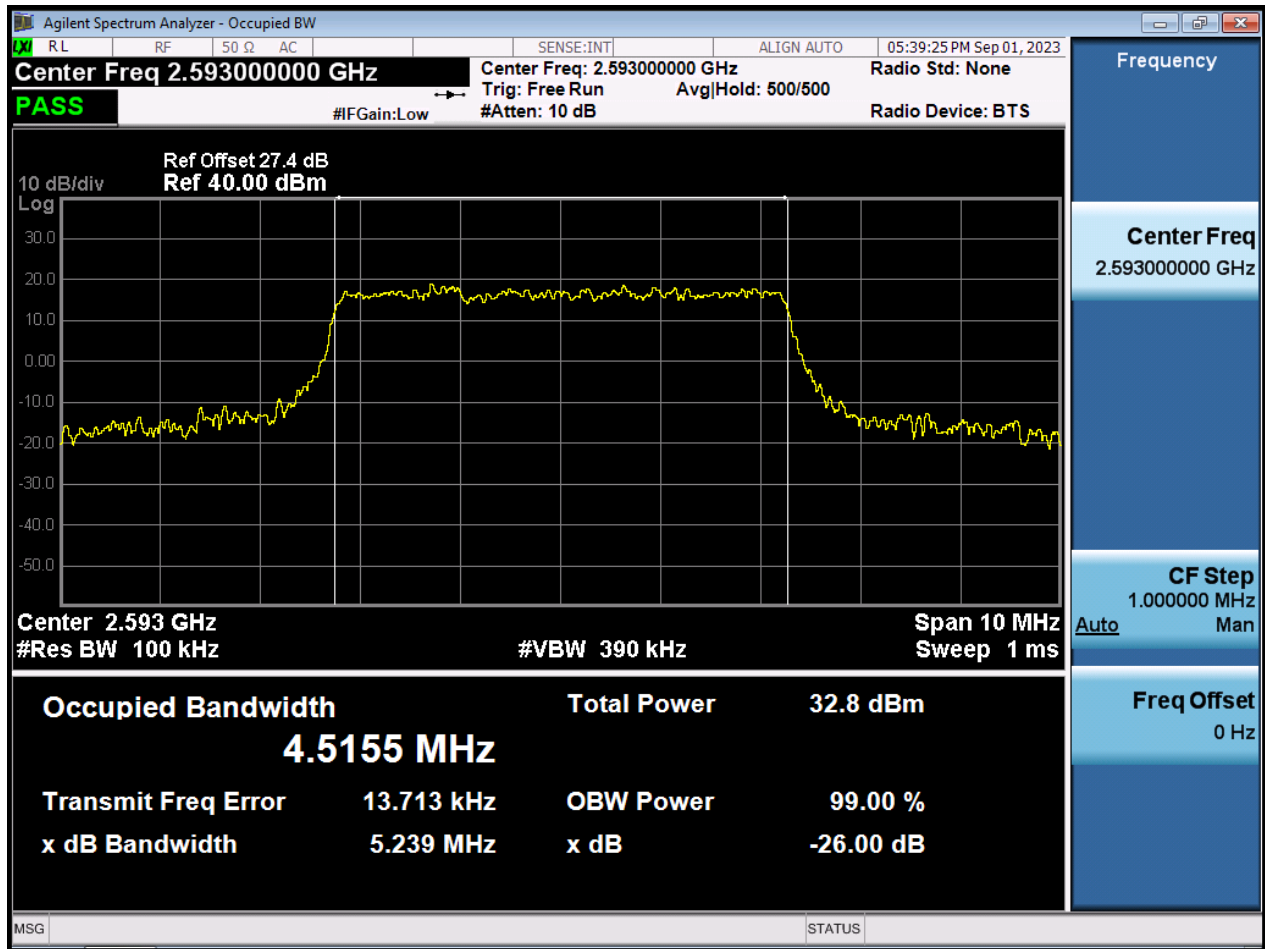


LTE41_5 M_OBW_Mid Channel_64QAM_Full RB

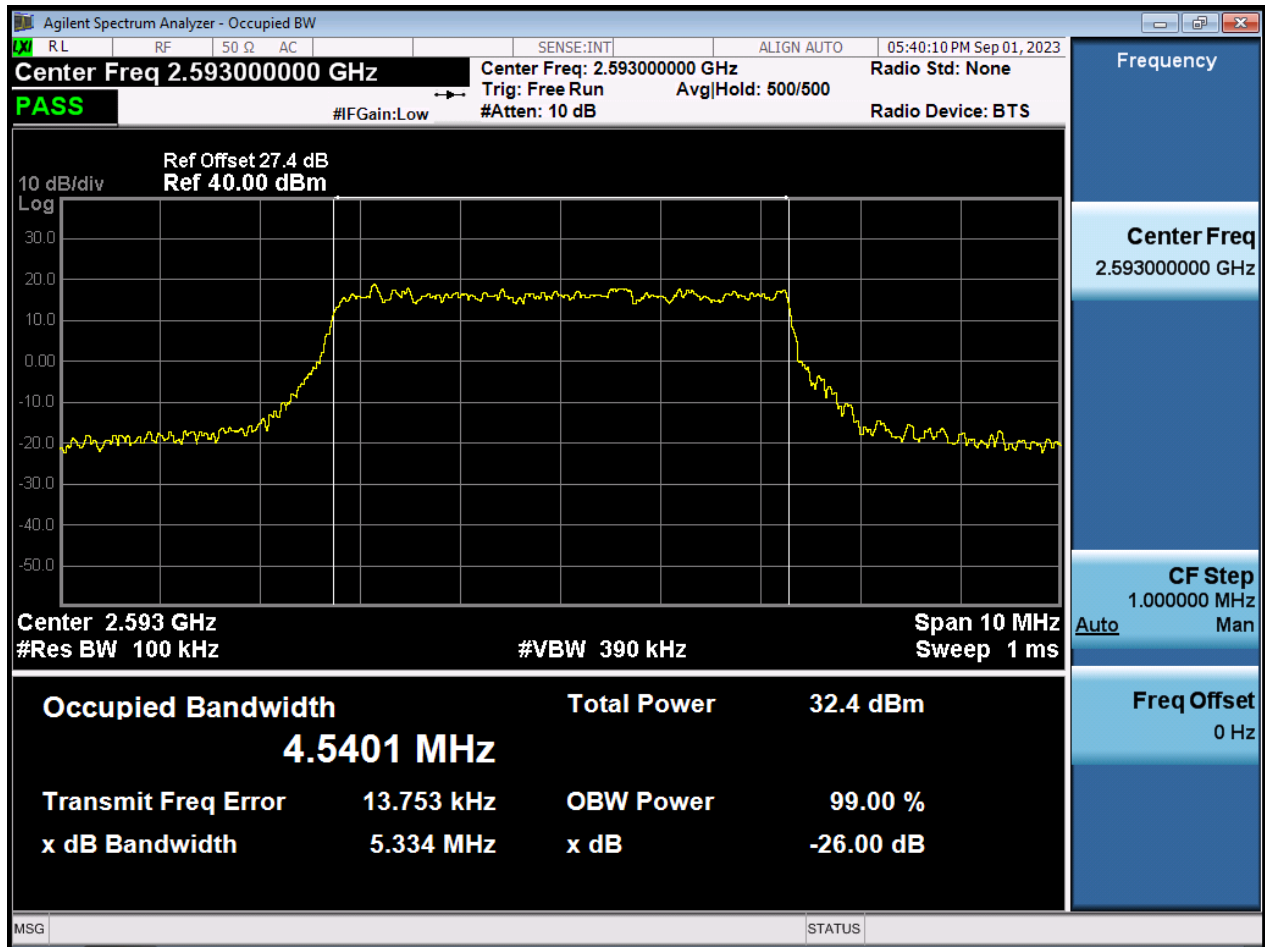


LTE41_5 M_OBW_Mid Channel_256QAM_Full RB

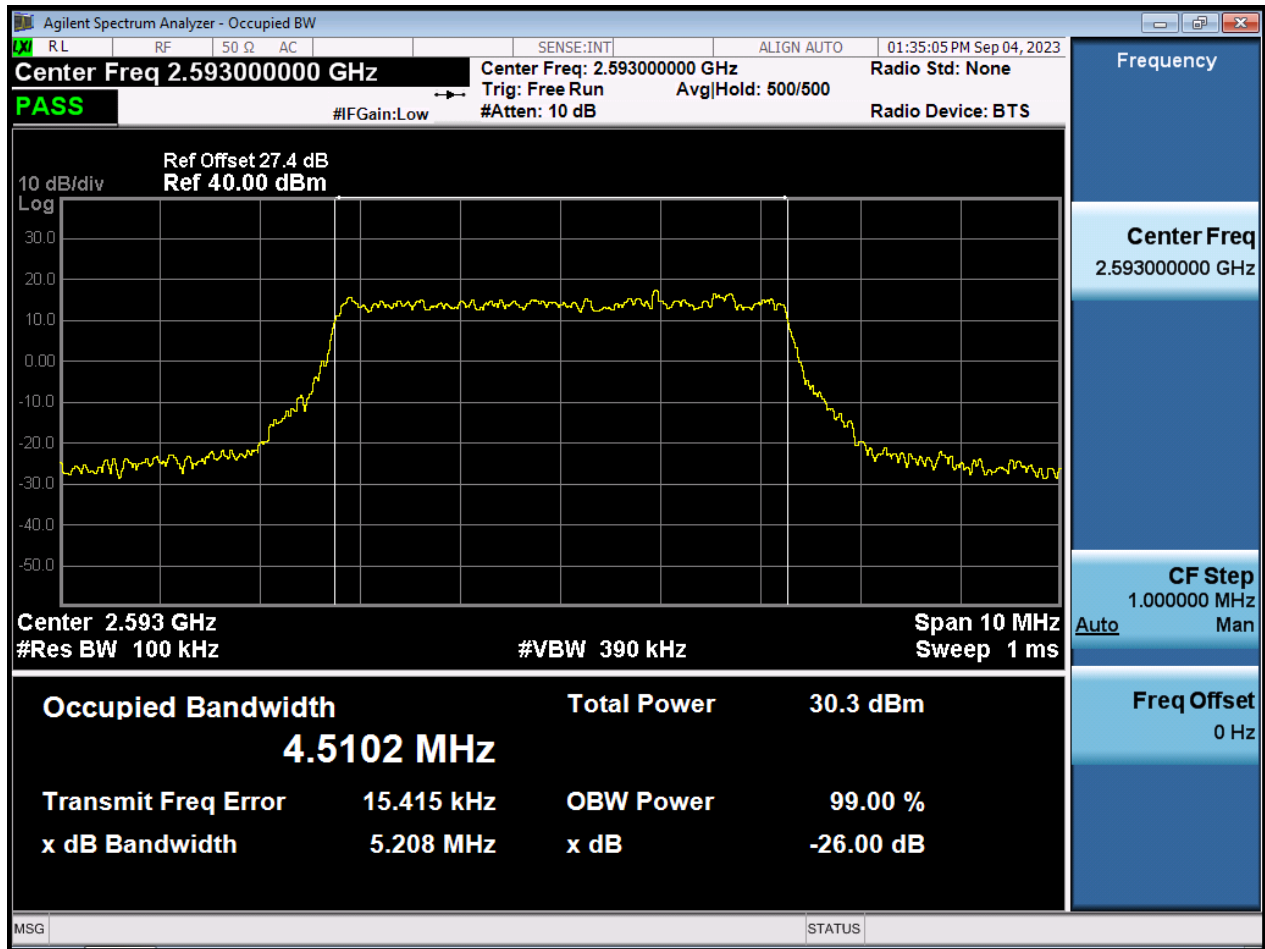


LTE41_10 M_OBW_Mid Channel_QPSK_Full RB

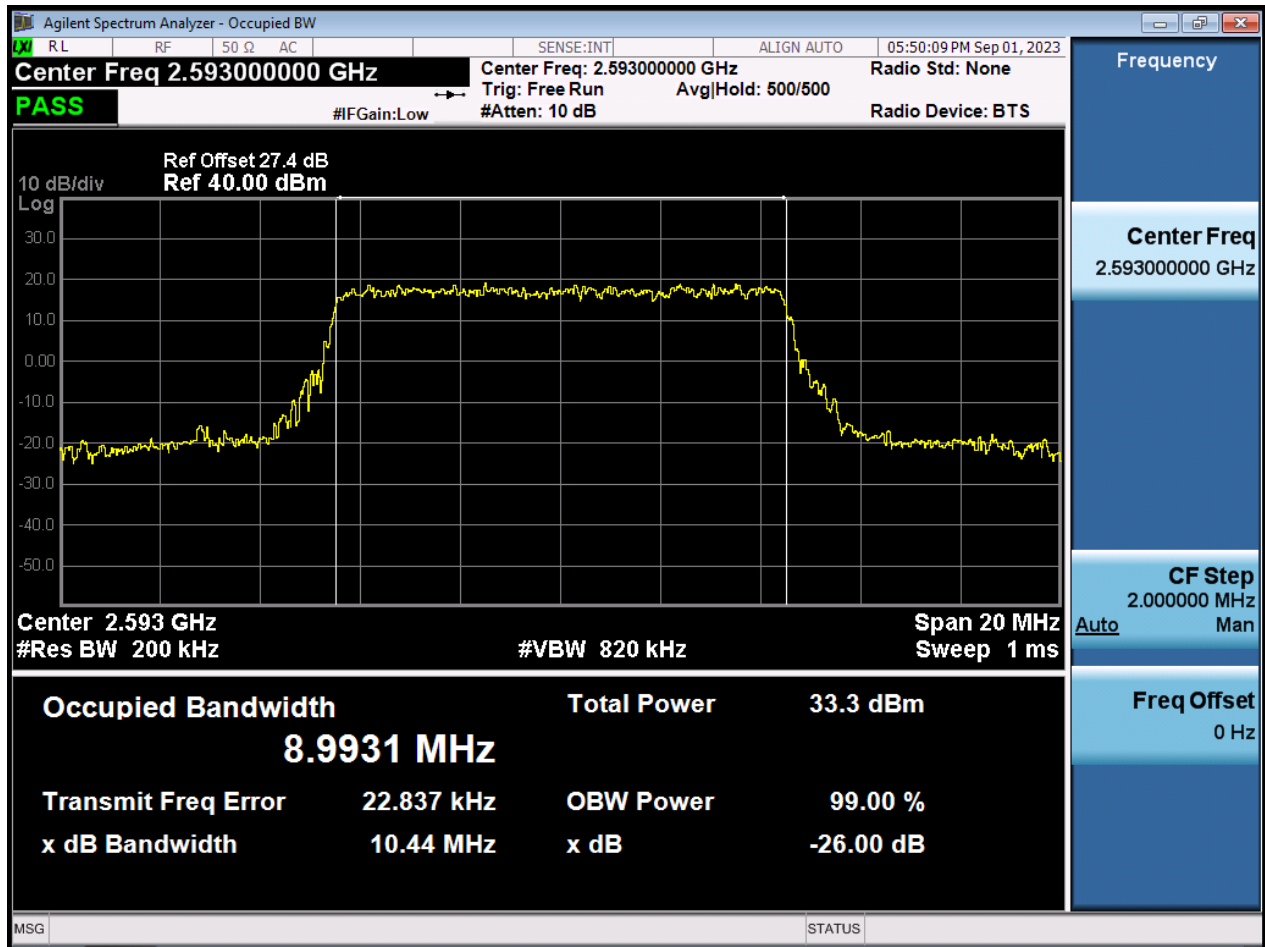


LTE41_10 M_OBW_Mid Channel_16QAM_Full RB

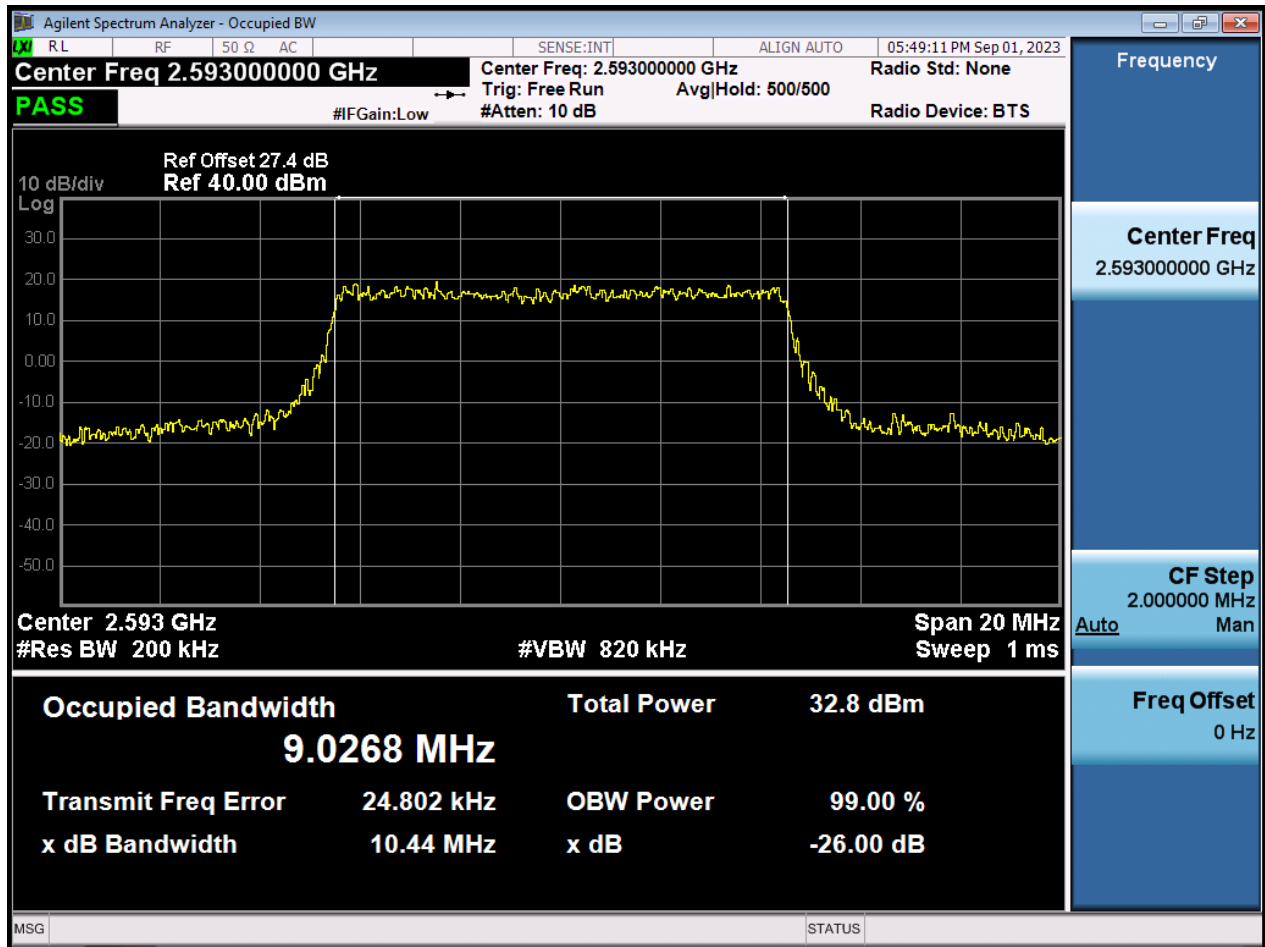


LTE41_10 M_OBW_Mid Channel_64QAM_Full RB

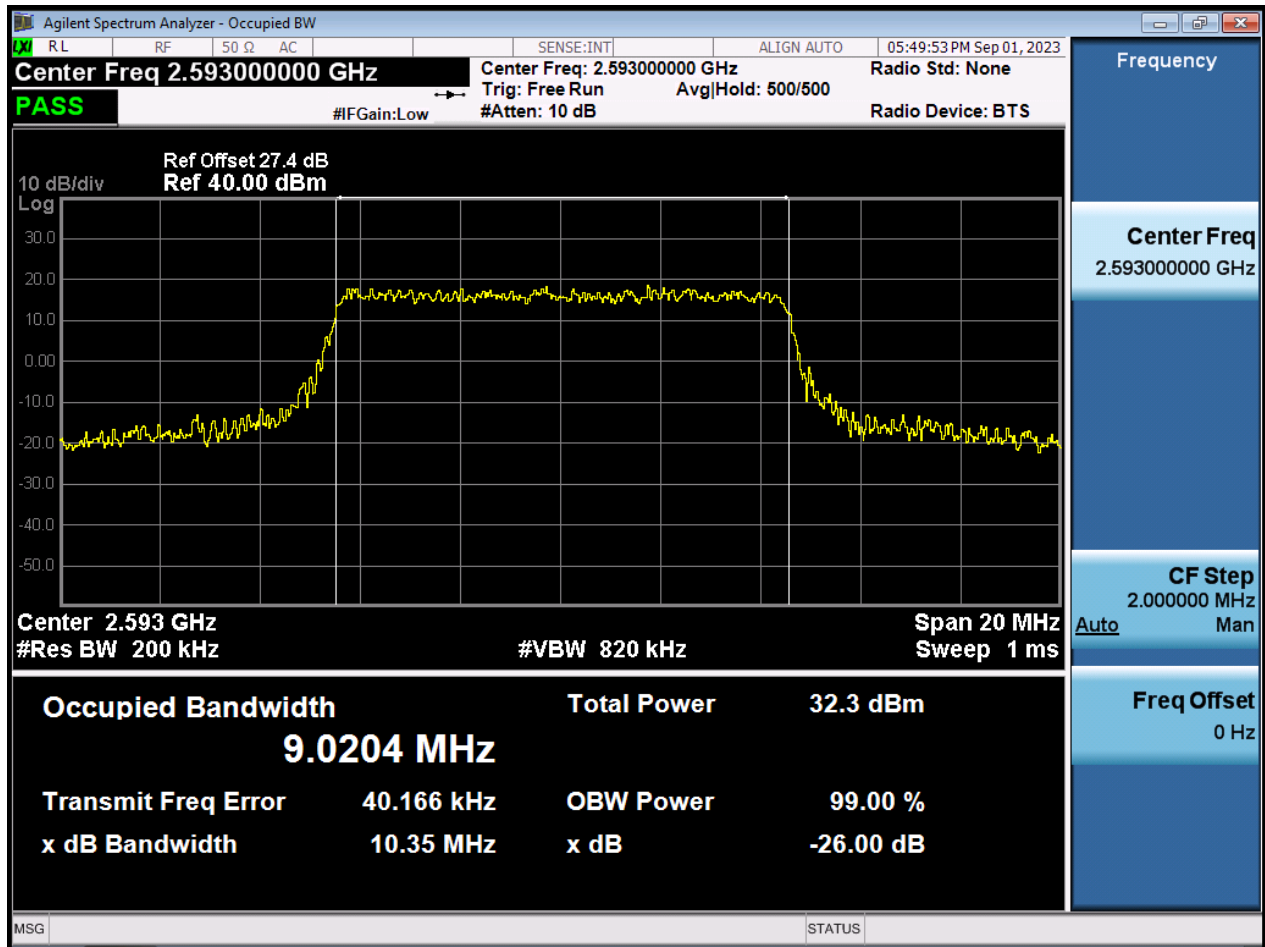


LTE41_10 M_OBW_Mid Channel_256QAM_Full RB

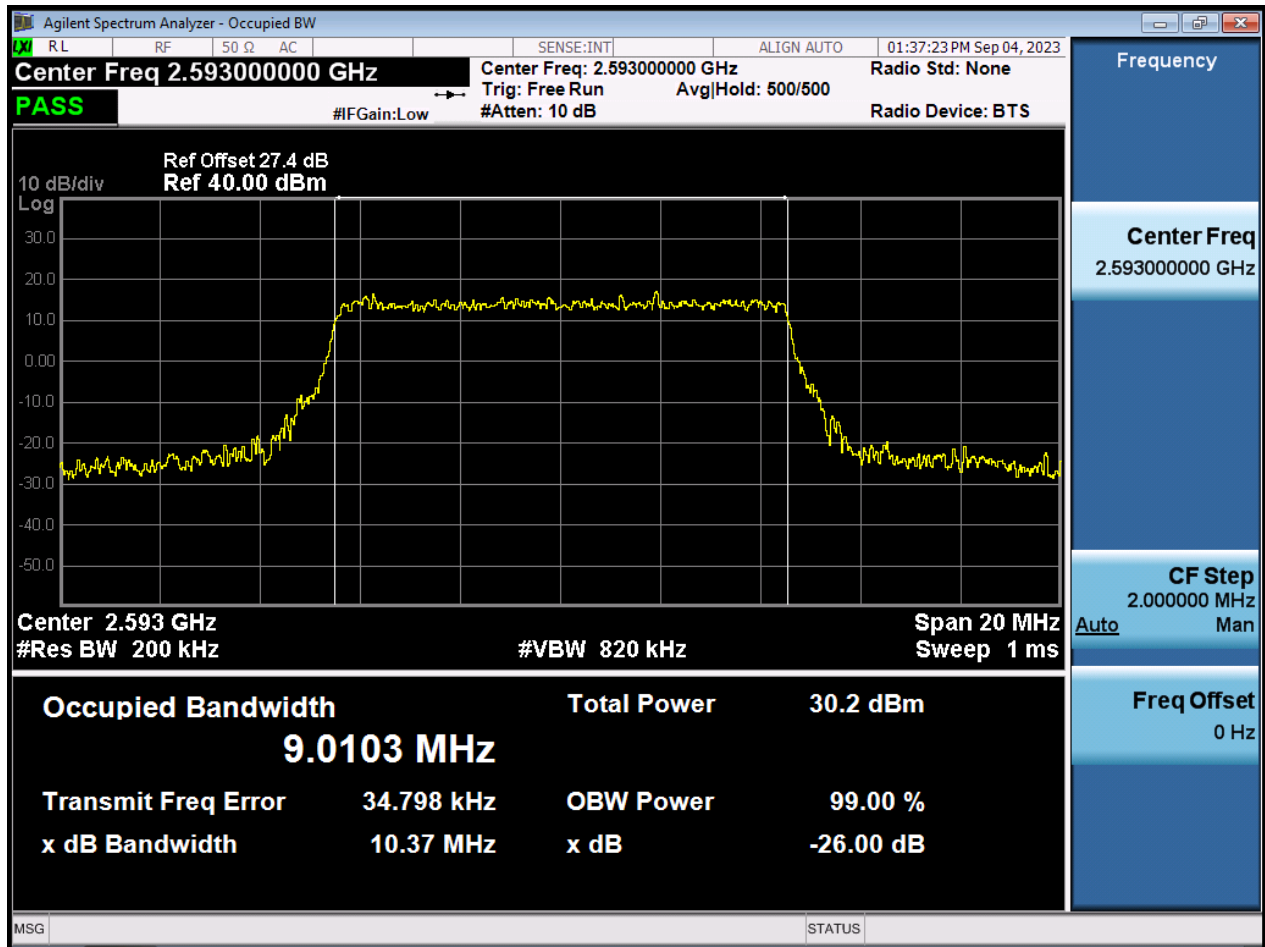


LTE41_15 M_OBW_Mid Channel_QPSK_Full RB

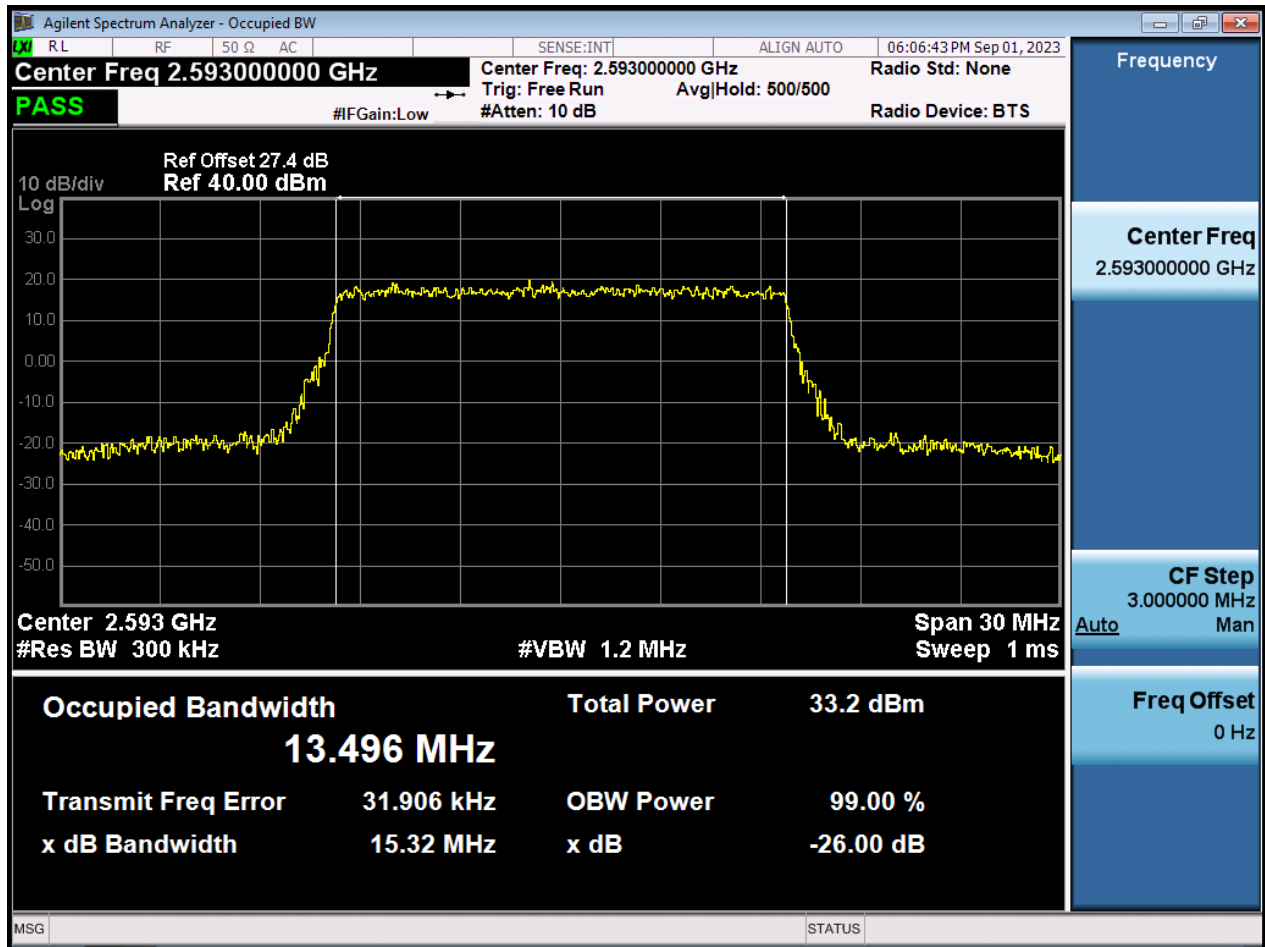


LTE41_15 M_OBW_Mid Channel_16QAM_Full RB

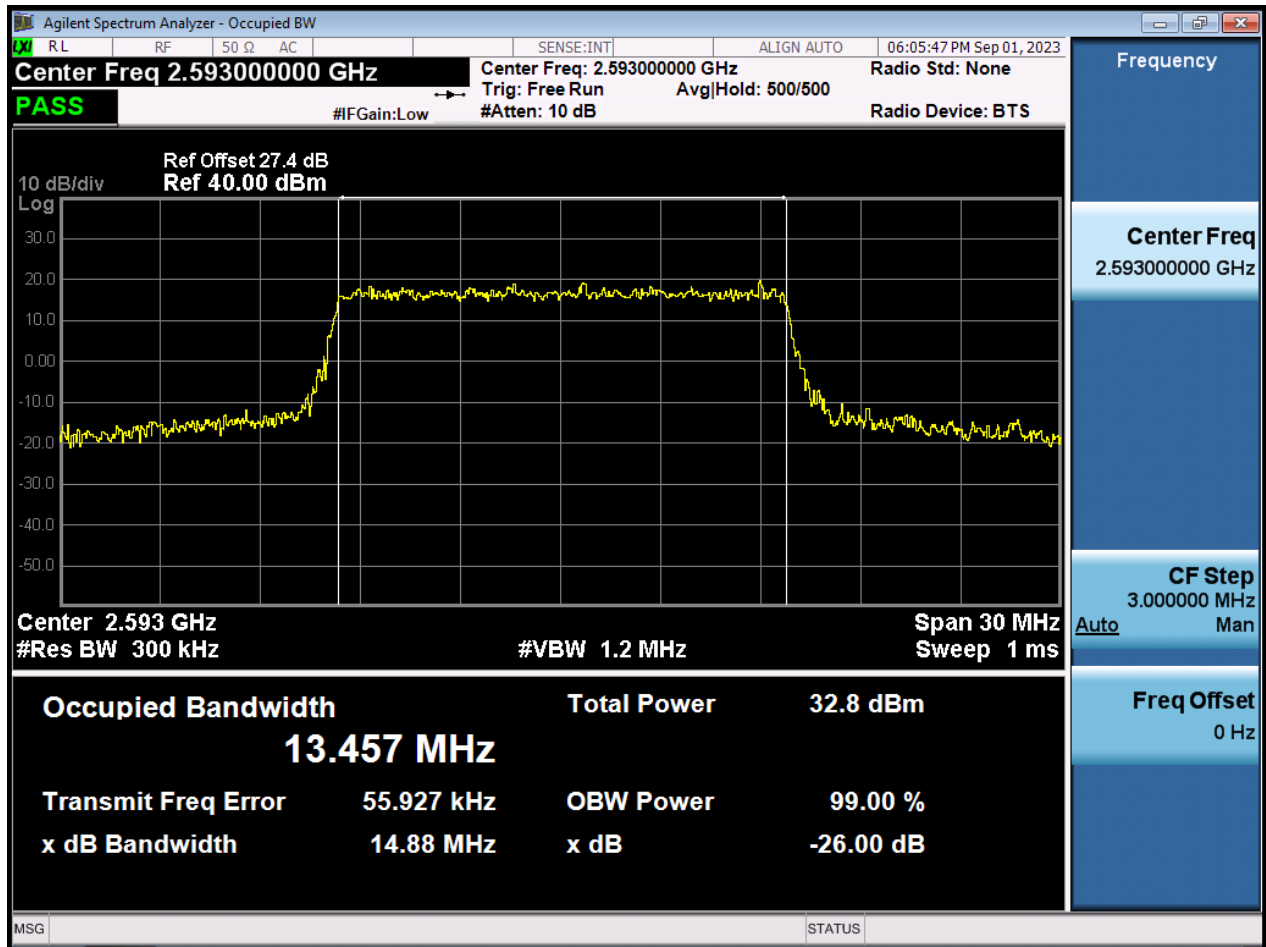


LTE41_15 M_OBW_Mid Channel_64QAM_Full RB

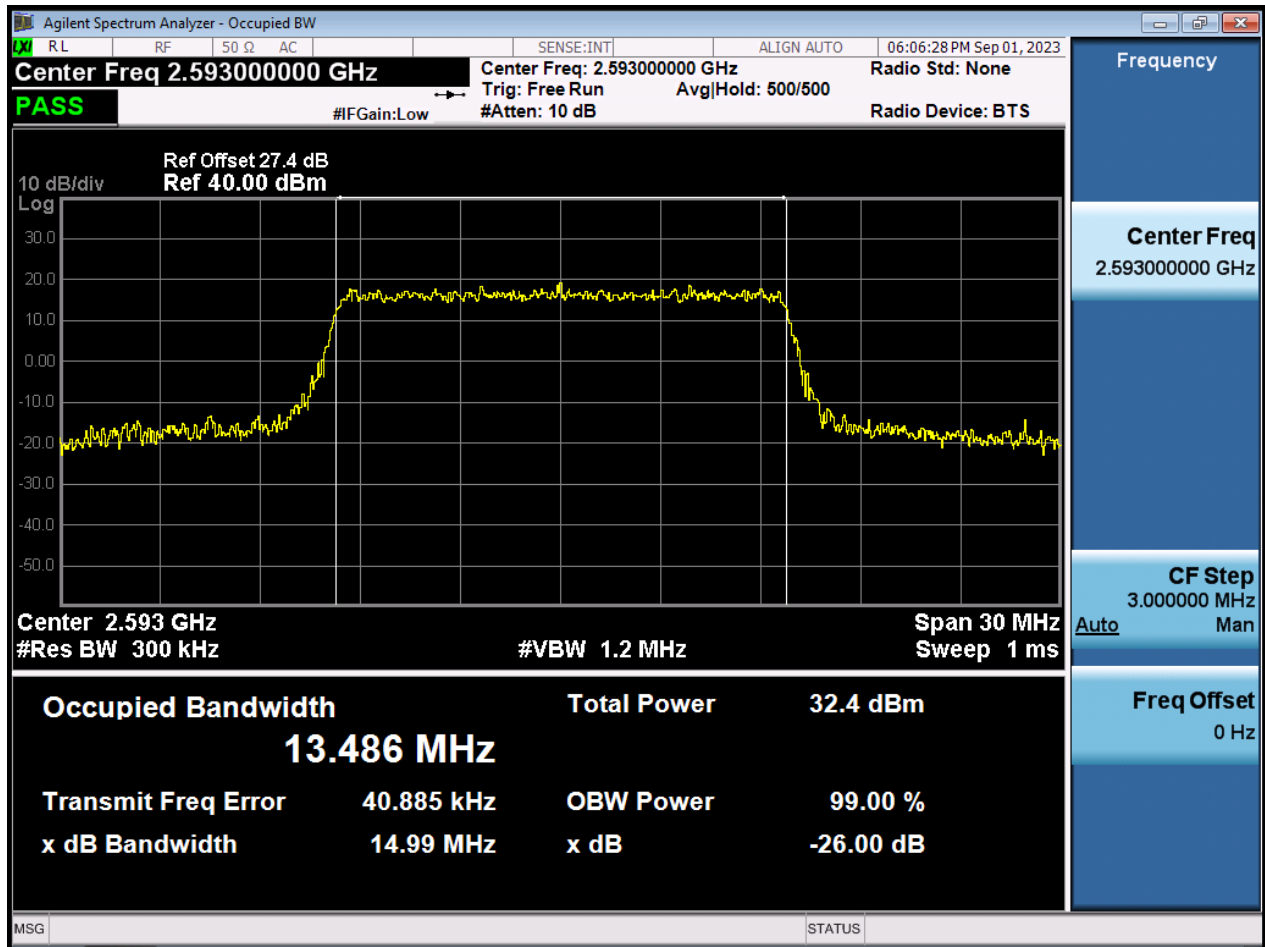


LTE41_15 M_OBW_Mid Channel_256QAM_Full RB

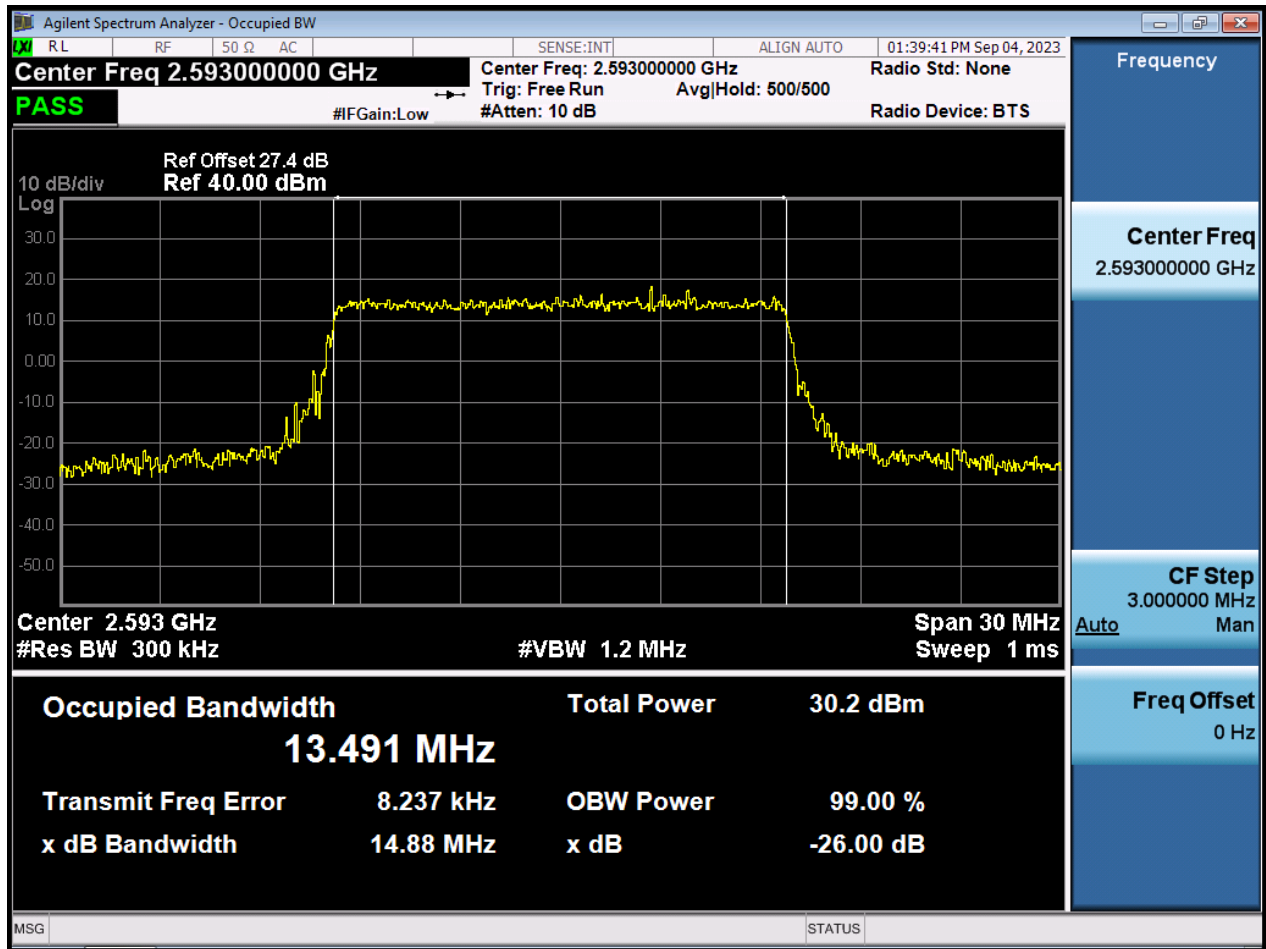


LTE41_20 M_OBW_Mid Channel_QPSK_Full RB

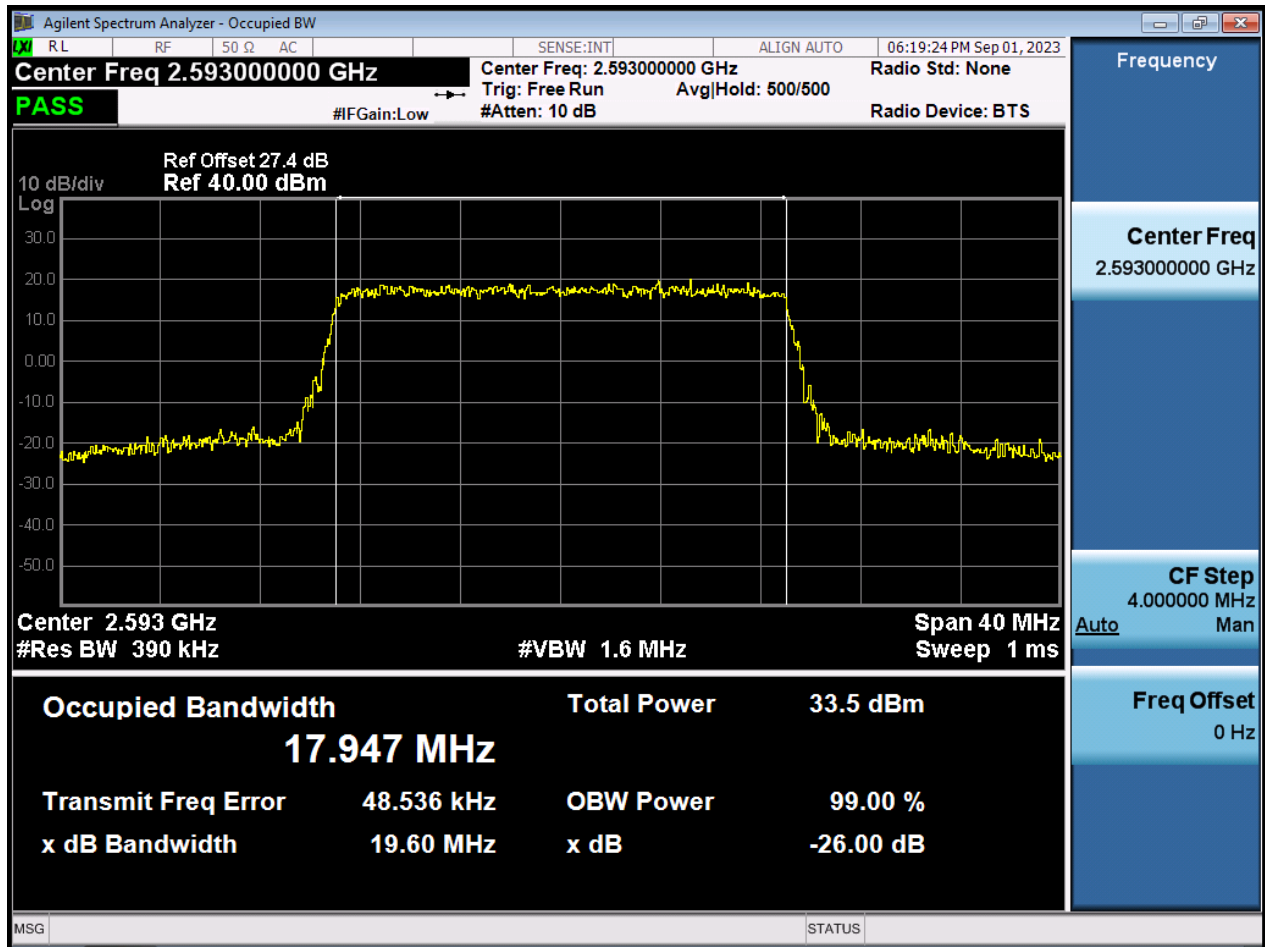


LTE41_20 M_OBW_Mid Channel_16QAM_Full RB

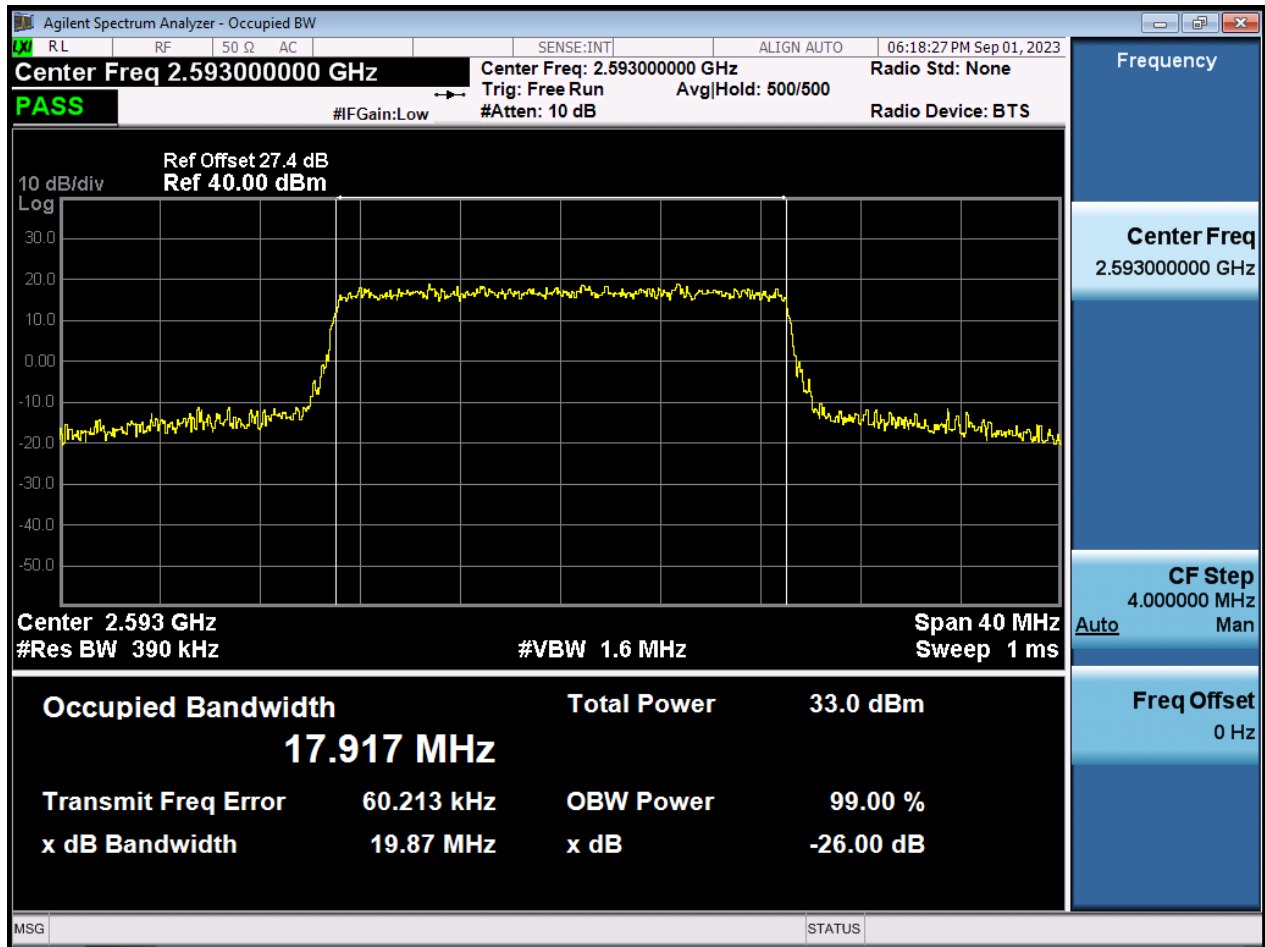


LTE41_20 M_OBW_Mid Channel_64QAM_Full RB

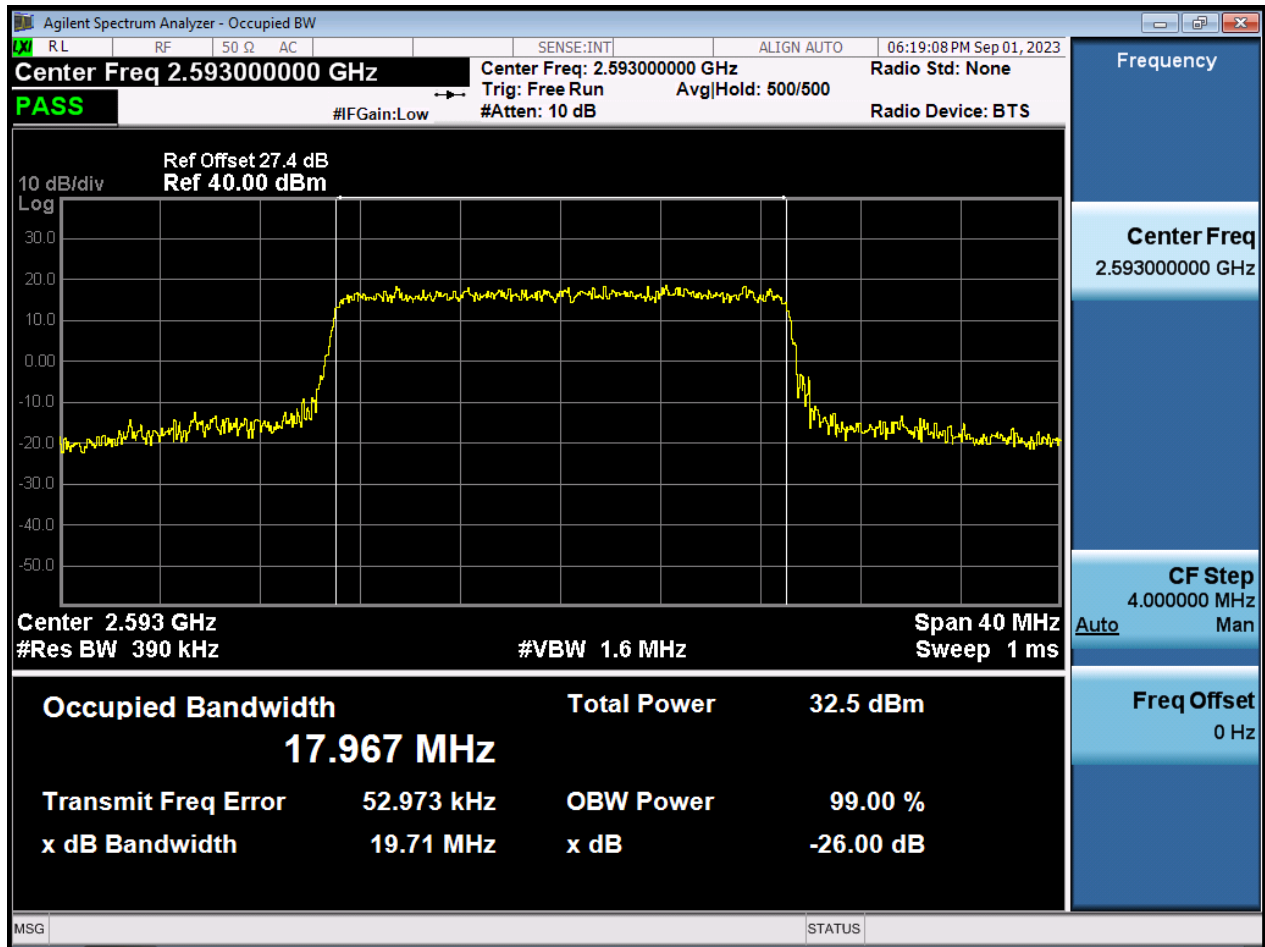


LTE41_20 M_OBW_Mid Channel_256QAM_Full RB

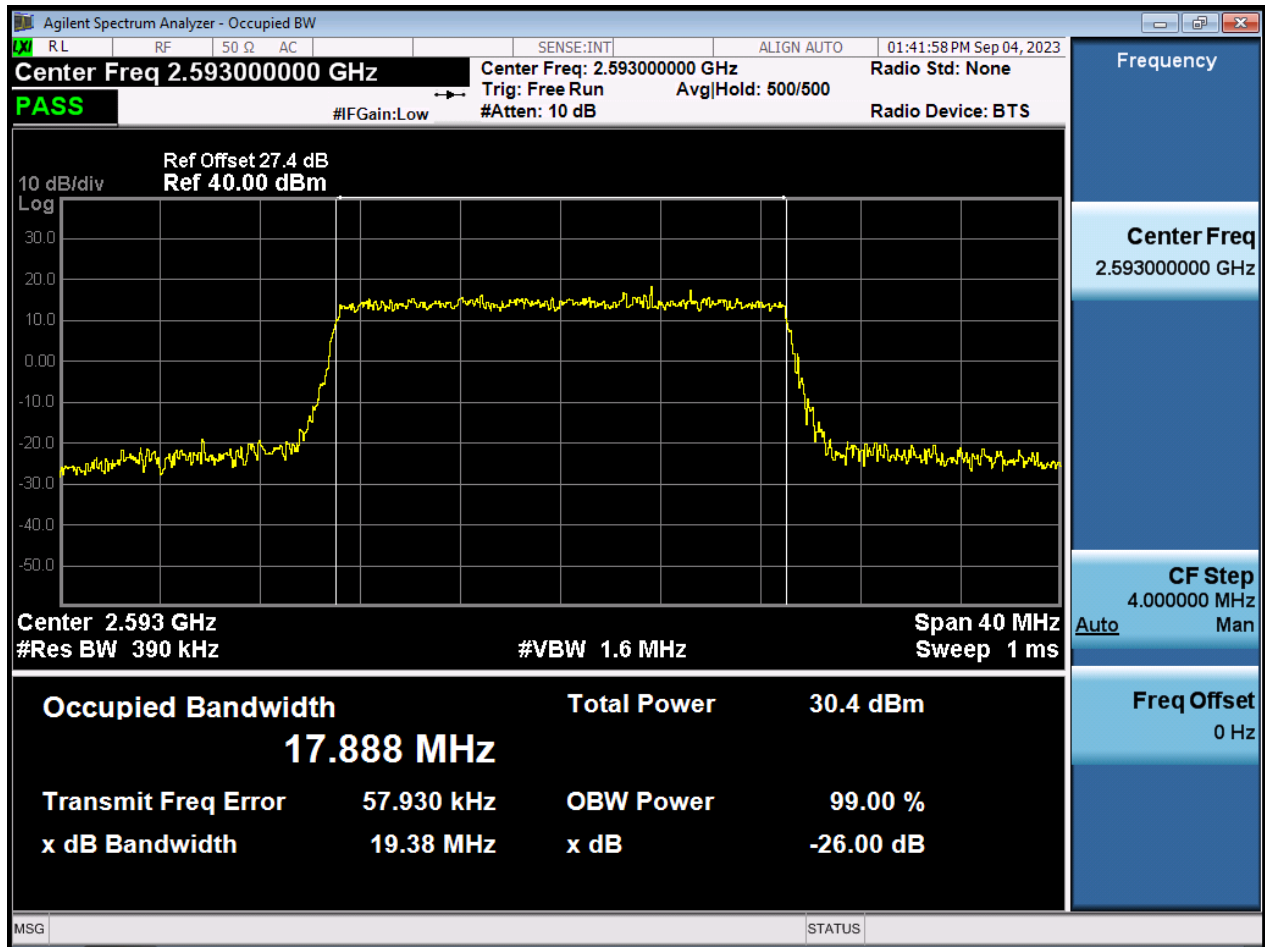


LTE41_5 M_PAR_Mid Channel_QPSK_Full RB

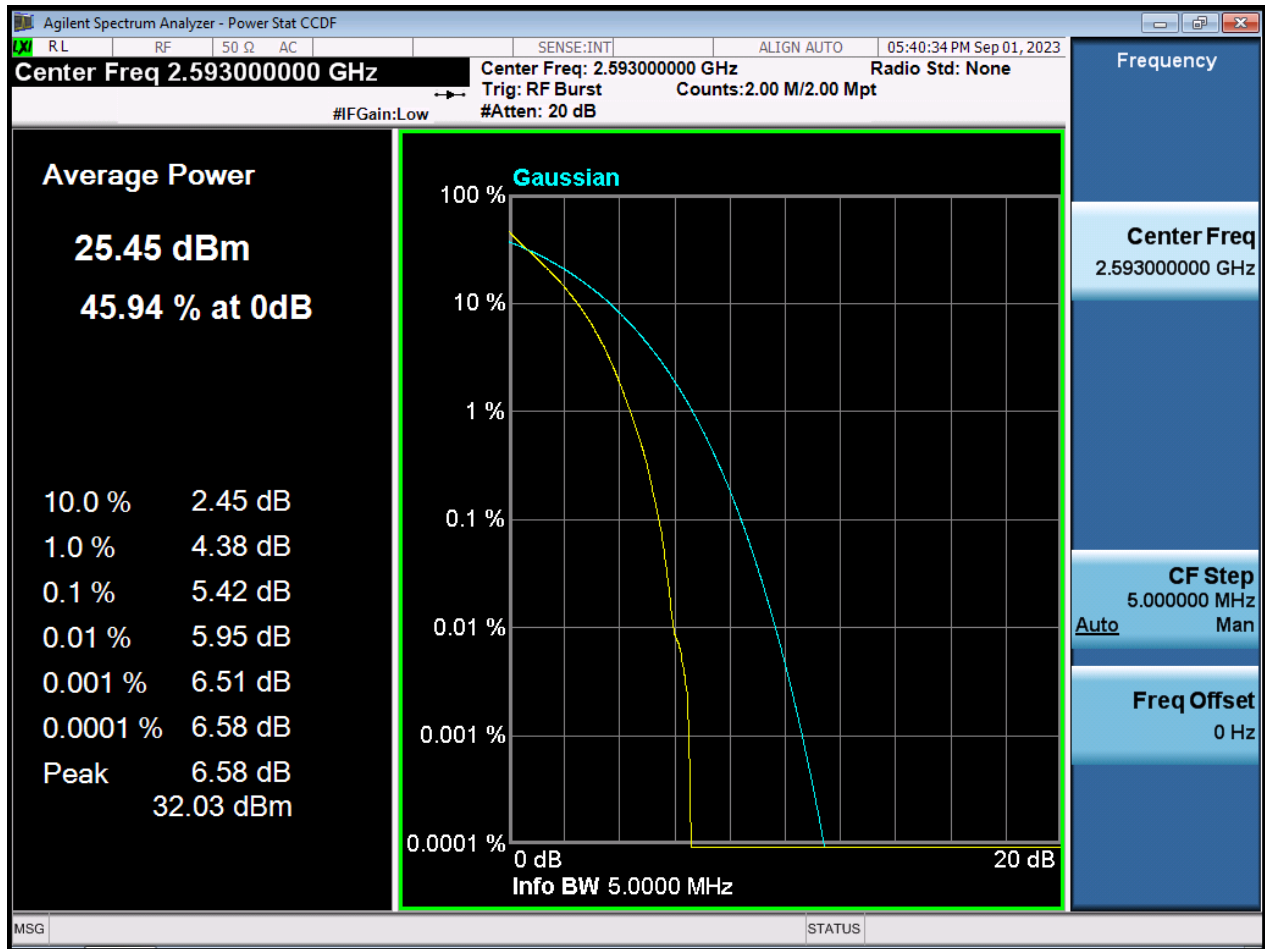


LTE41_5 M_PAR_Mid Channel_16QAM_Full RB

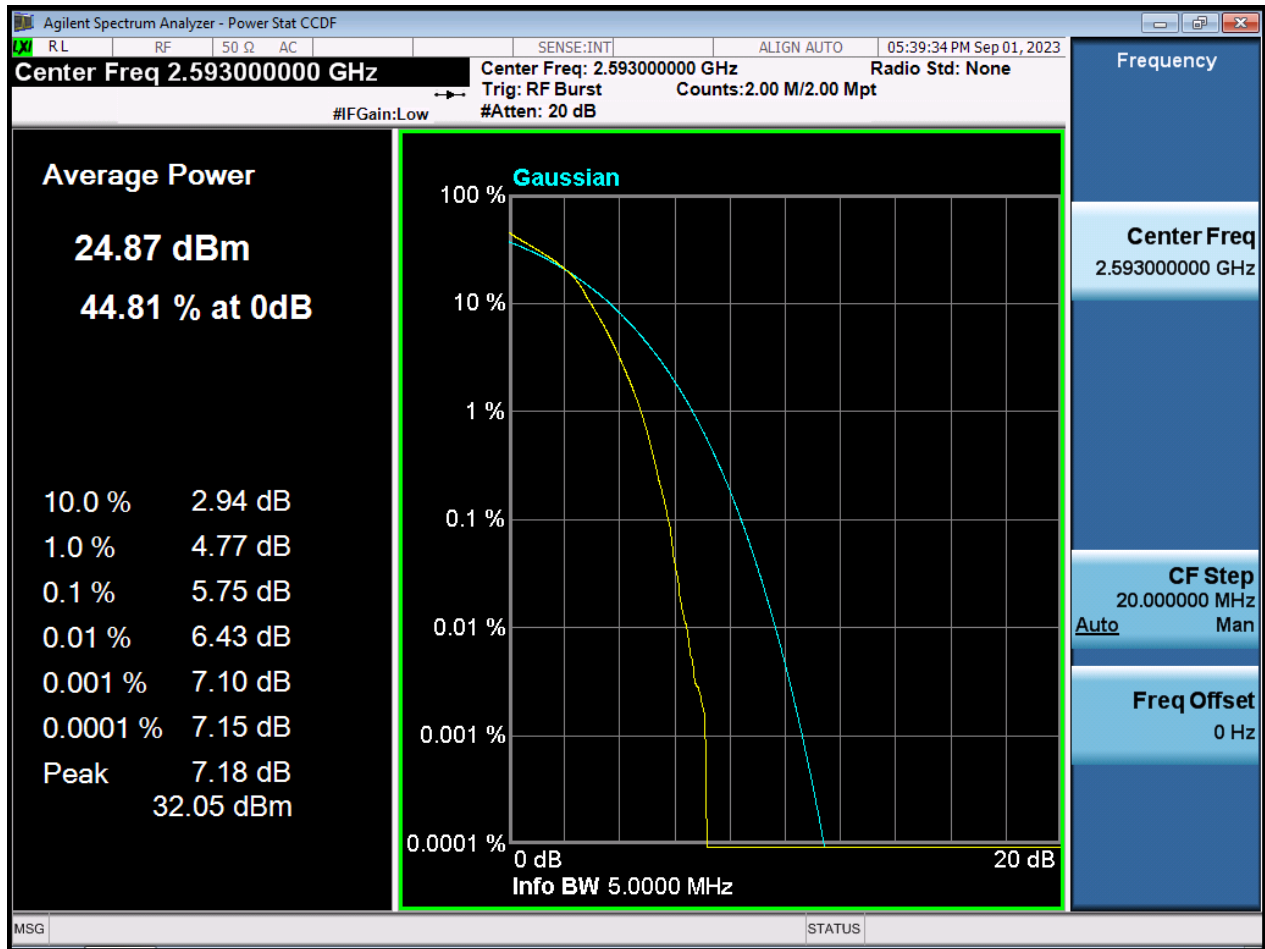


LTE41_5 M_PAR_Mid Channel_64QAM_Full RB

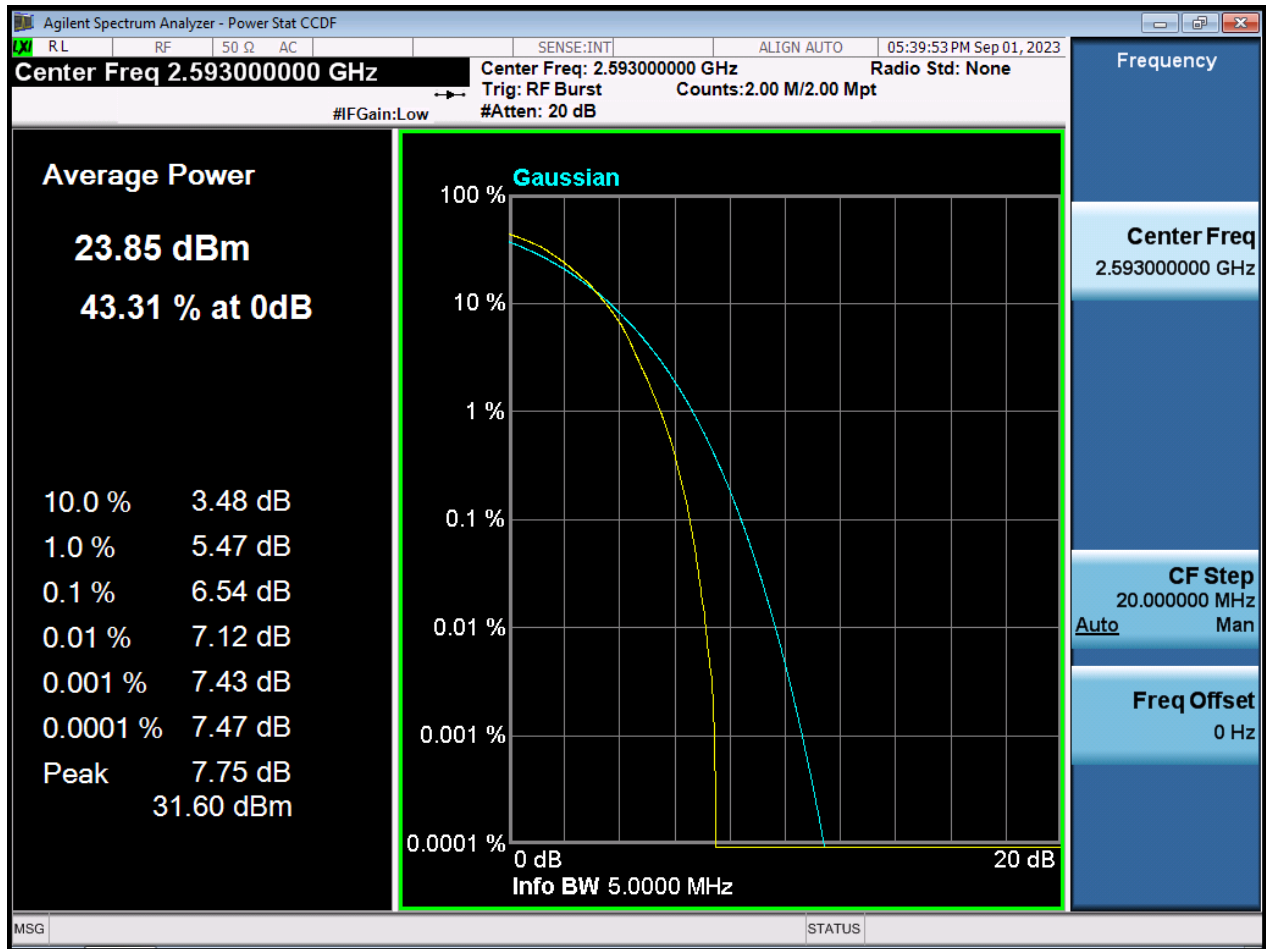


LTE41_5 M_PAR_Mid Channel_256QAM_Full RB

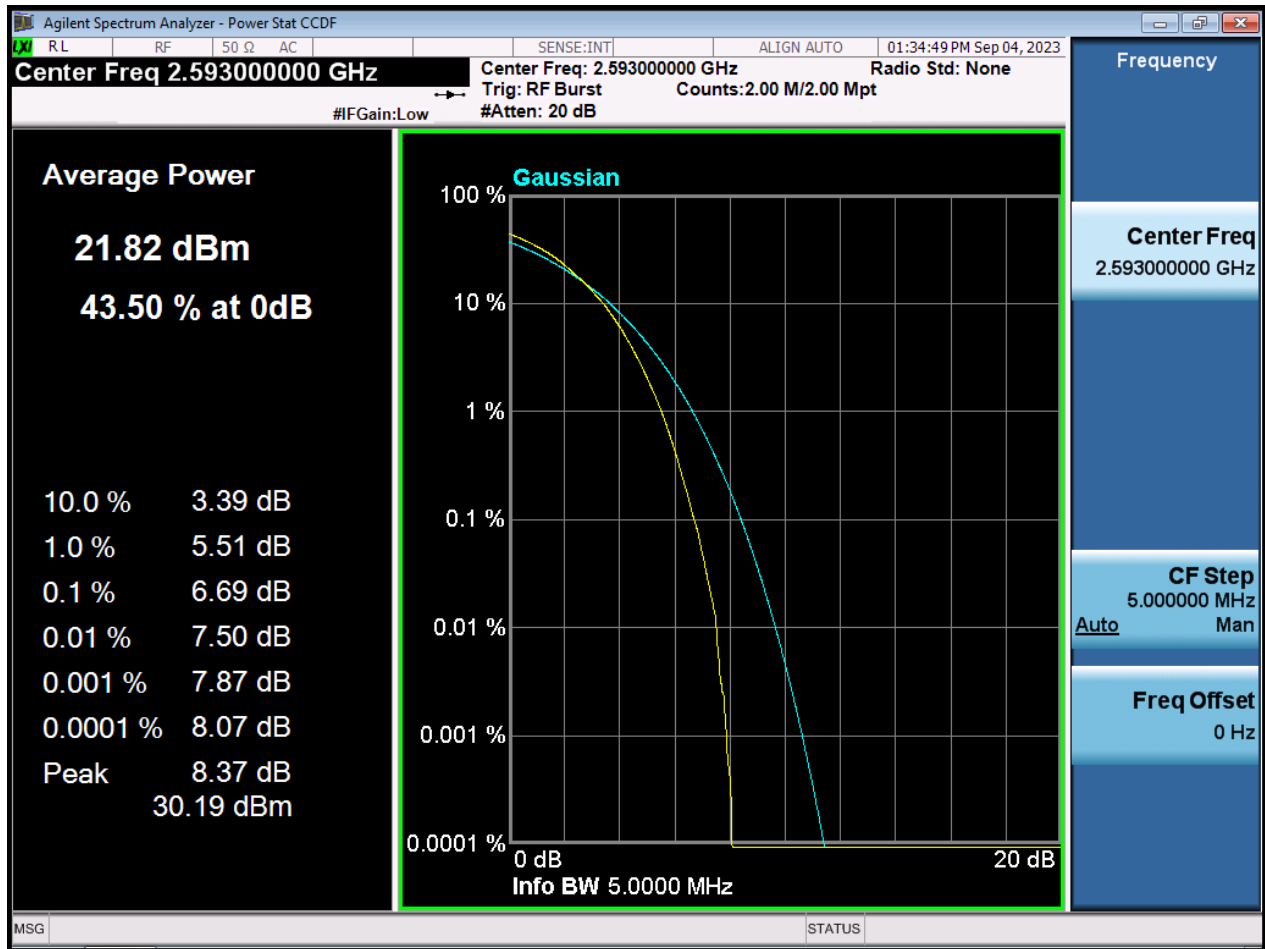


LTE41_10 M_PAR_Mid Channel_QPSK_Full RB

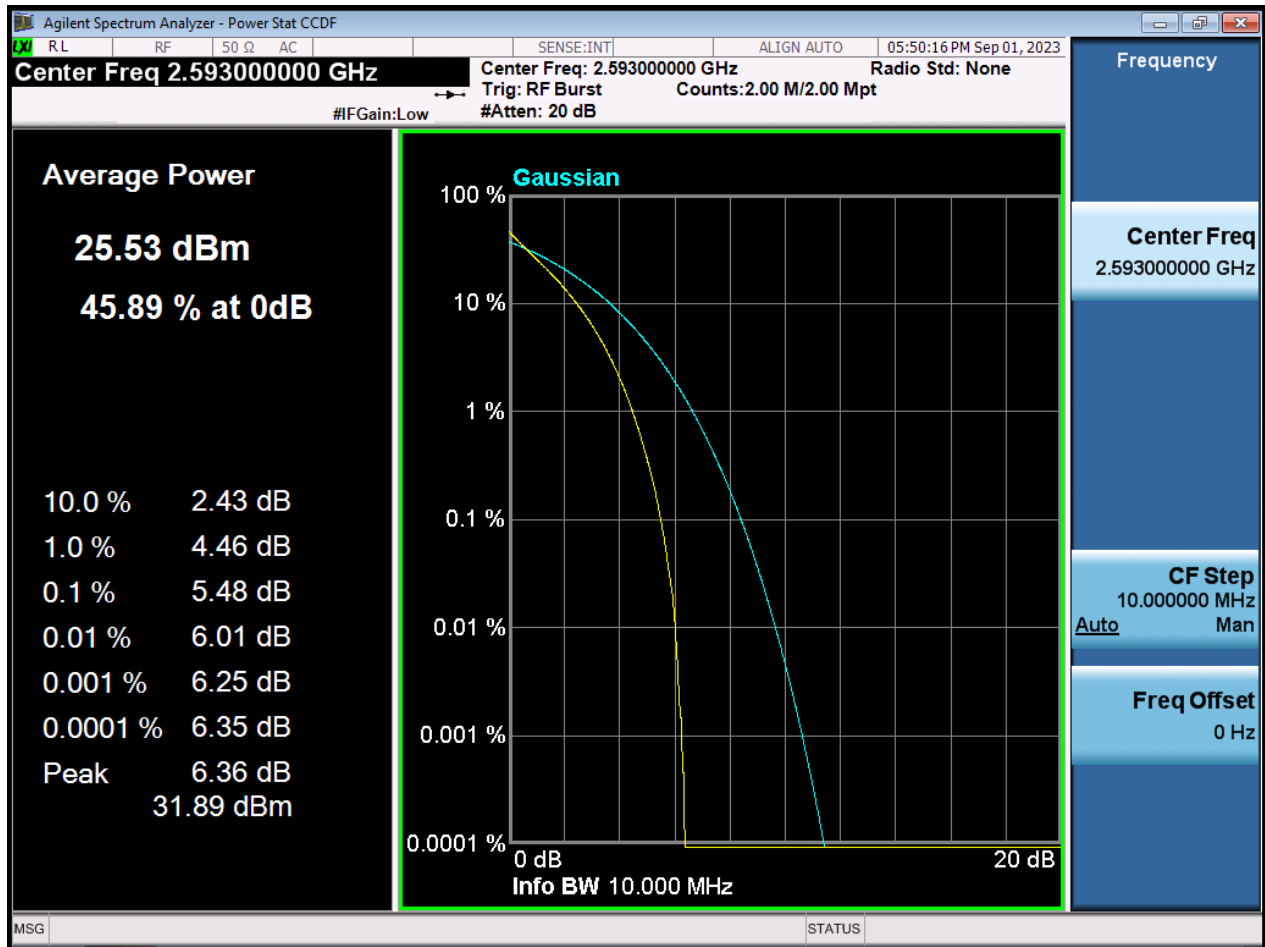


LTE41_10 M_PAR_Mid Channel_16QAM_Full RB

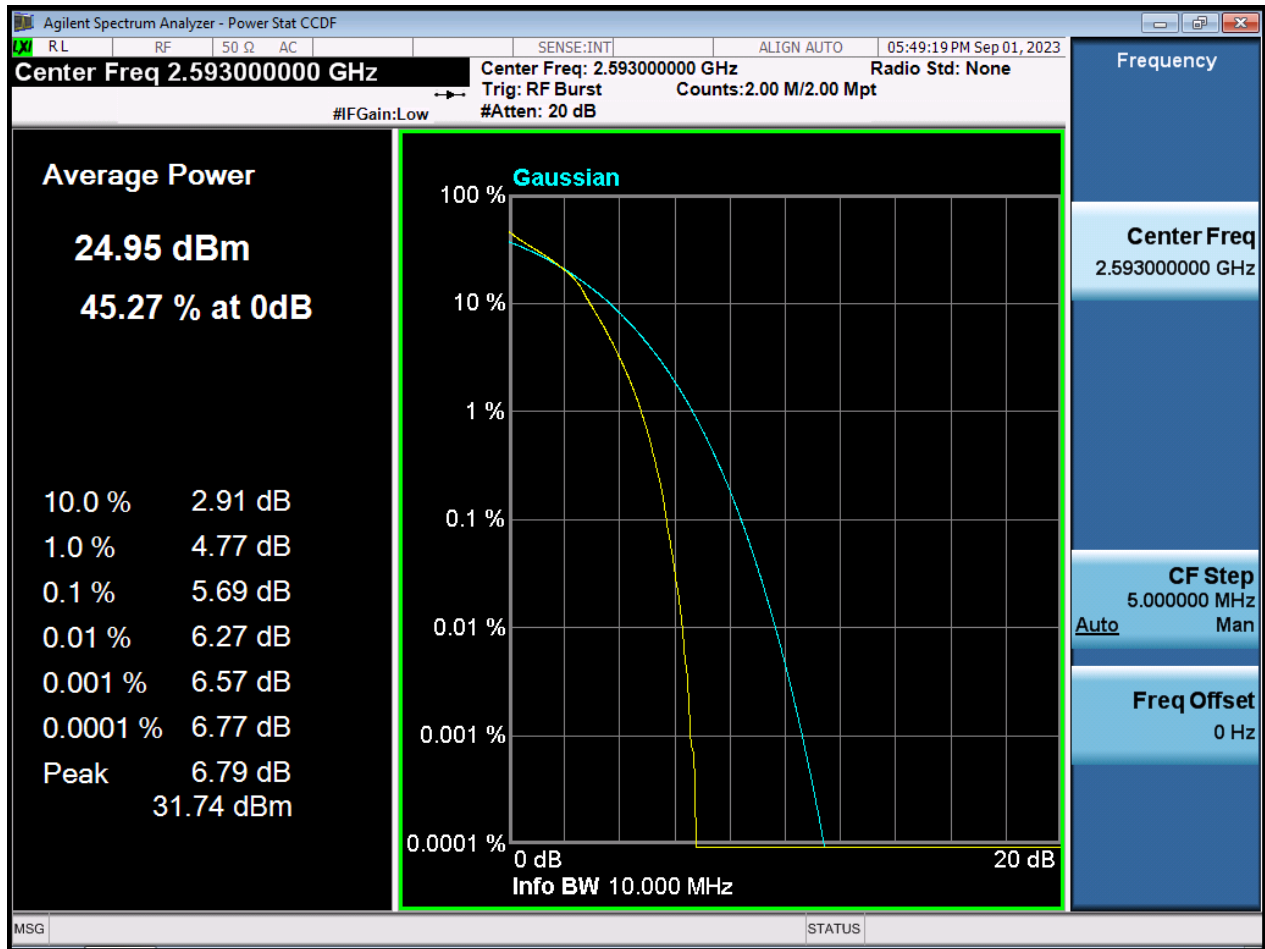


LTE41_10 M_PAR_Mid Channel_64QAM_Full RB

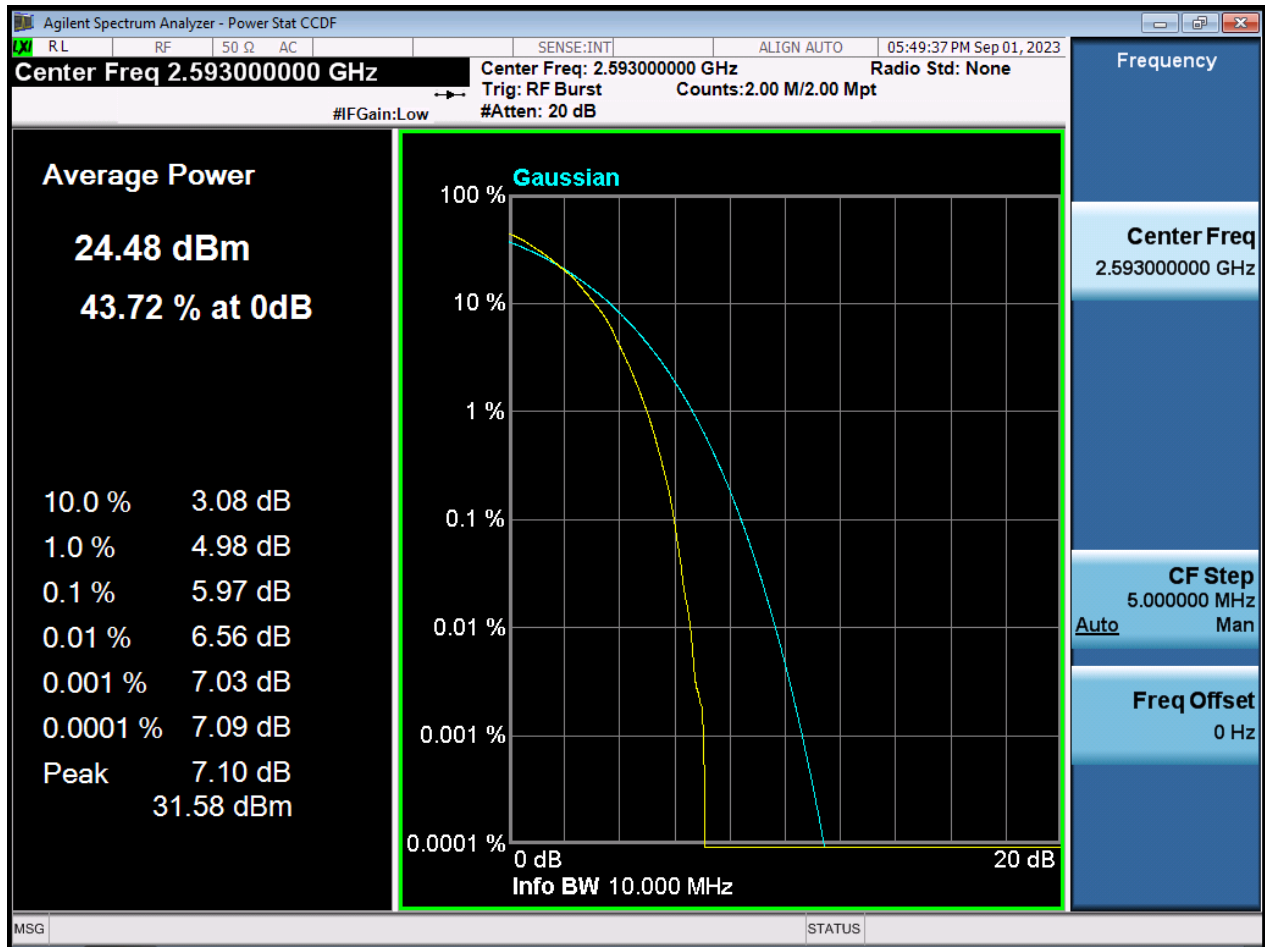


LTE41_10 M_PAR_Mid Channel_256QAM_Full RB

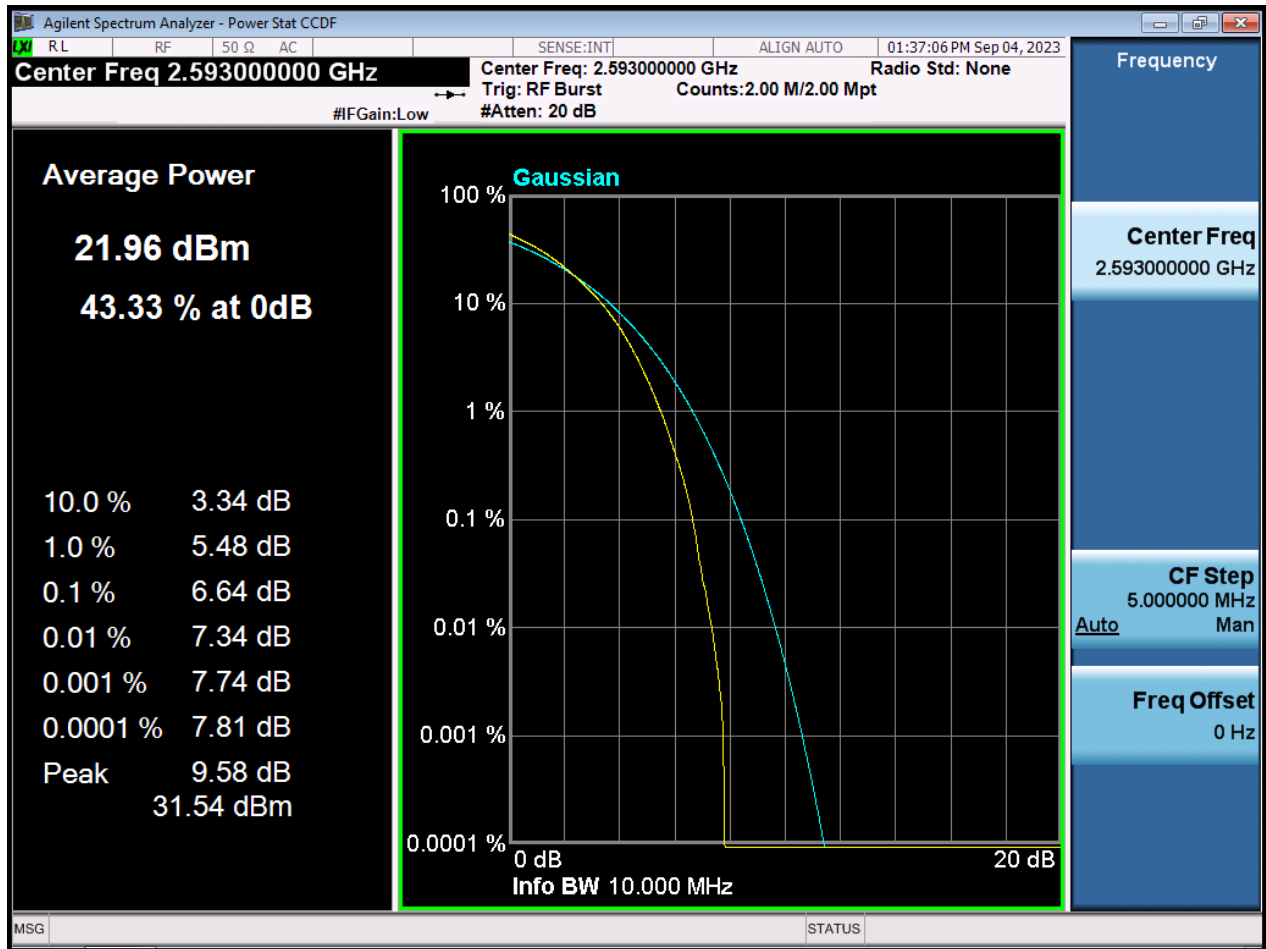


LTE41_15 M_PAR_Mid Channel_QPSK_Full RB

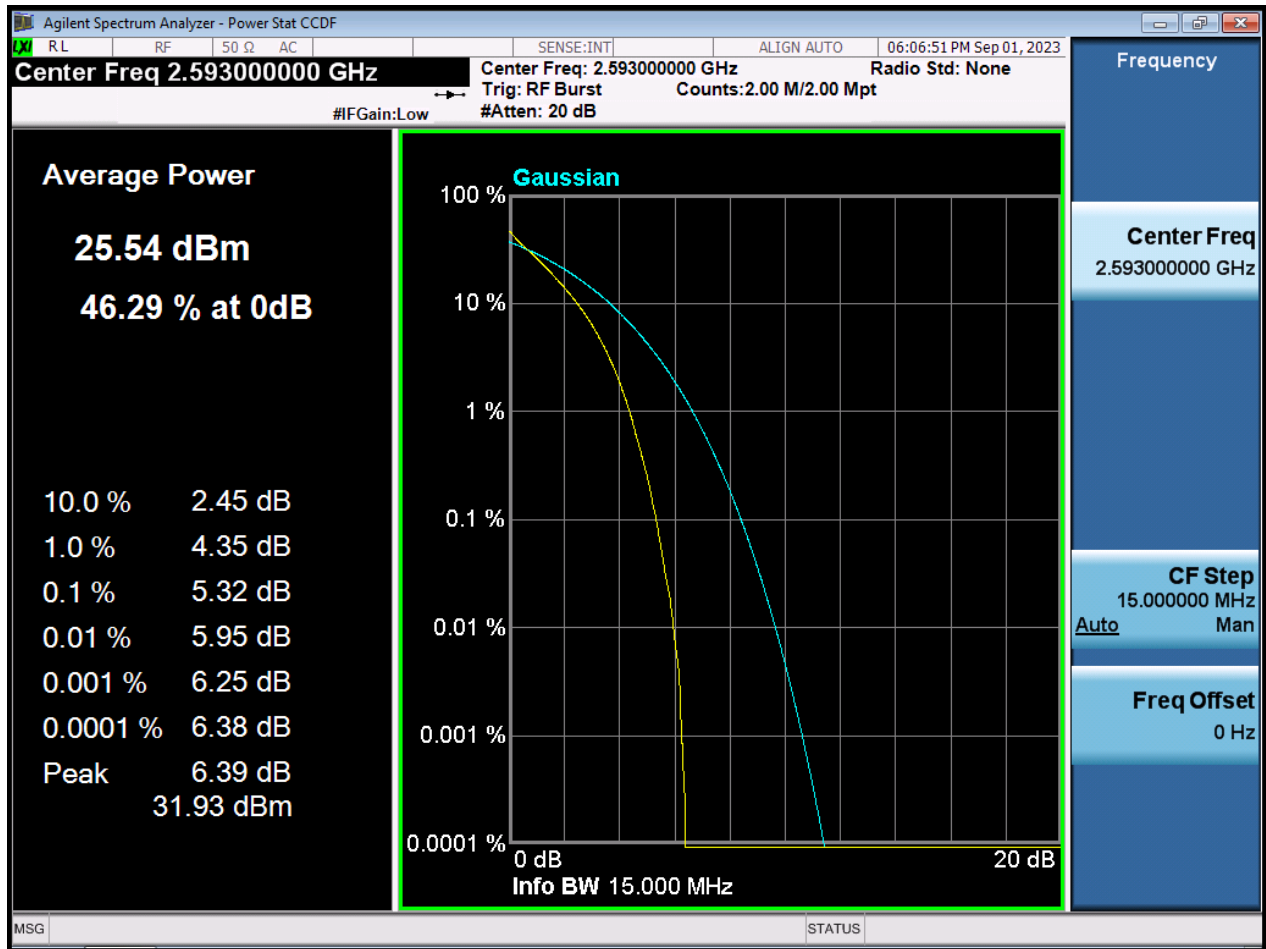


LTE41_15 M_PAR_Mid Channel_16QAM_Full RB

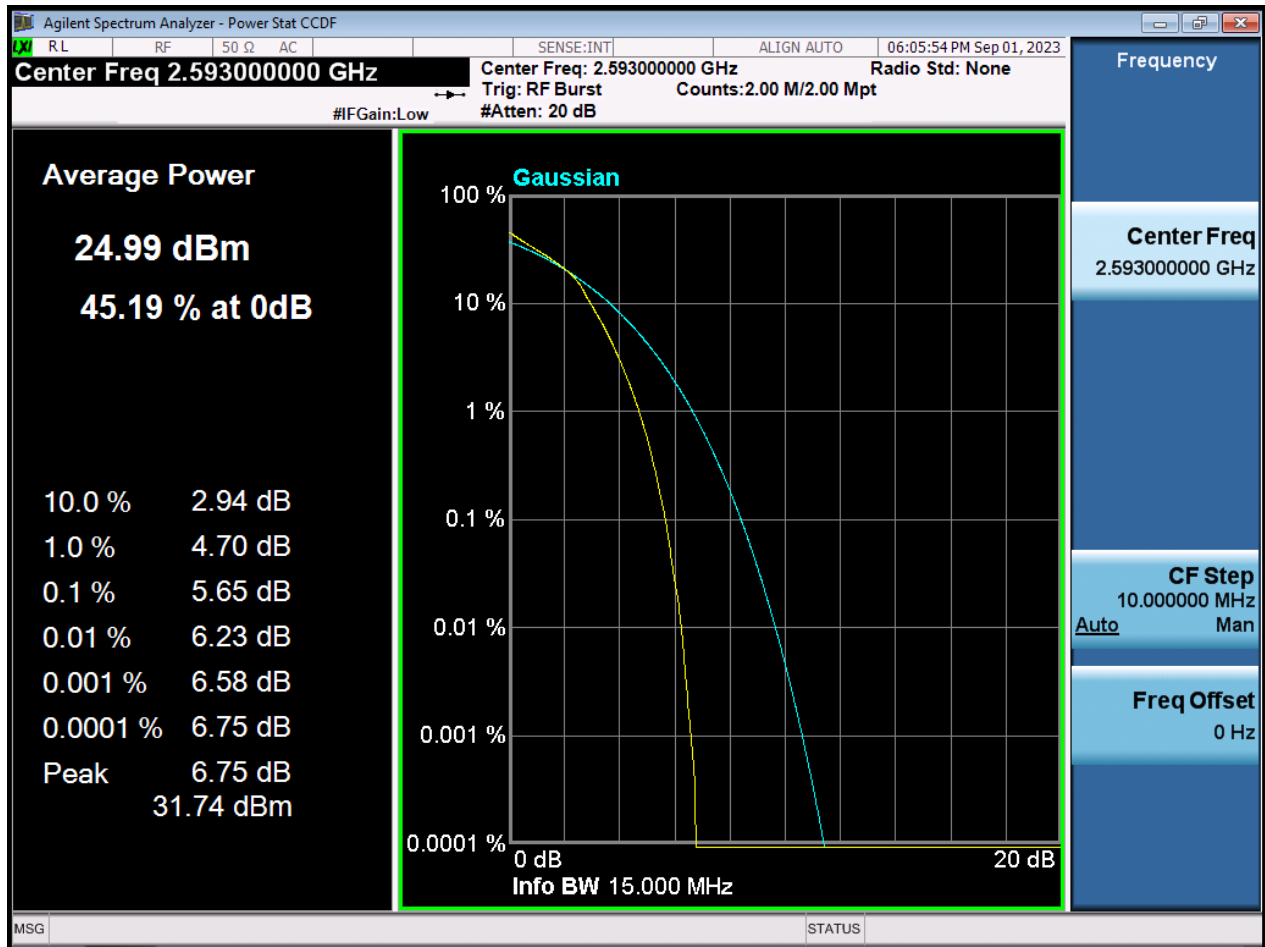


LTE41_15 M_PAR_Mid Channel_64QAM_Full RB

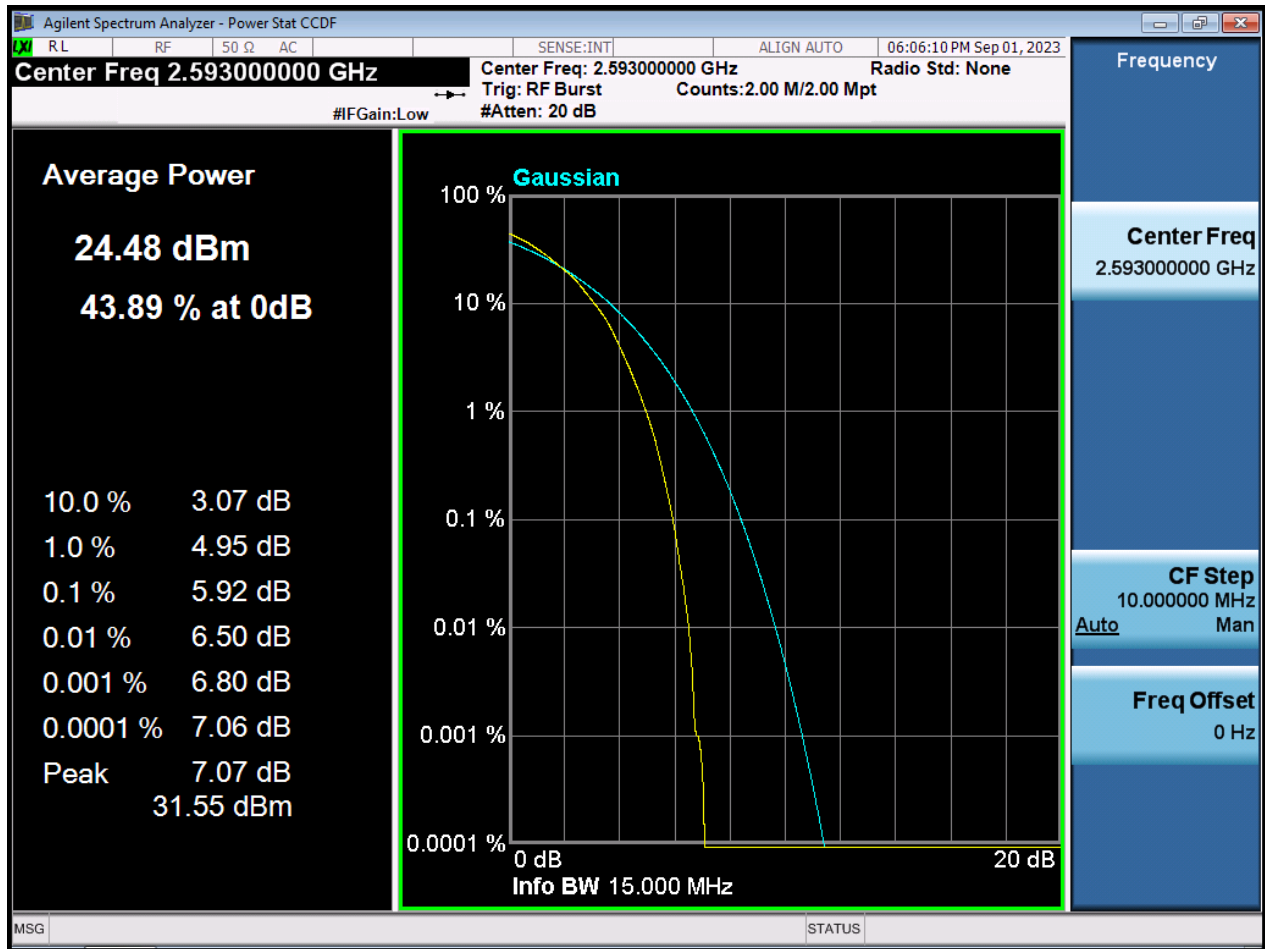


LTE41_15 M_PAR_Mid Channel_256QAM_Full RB

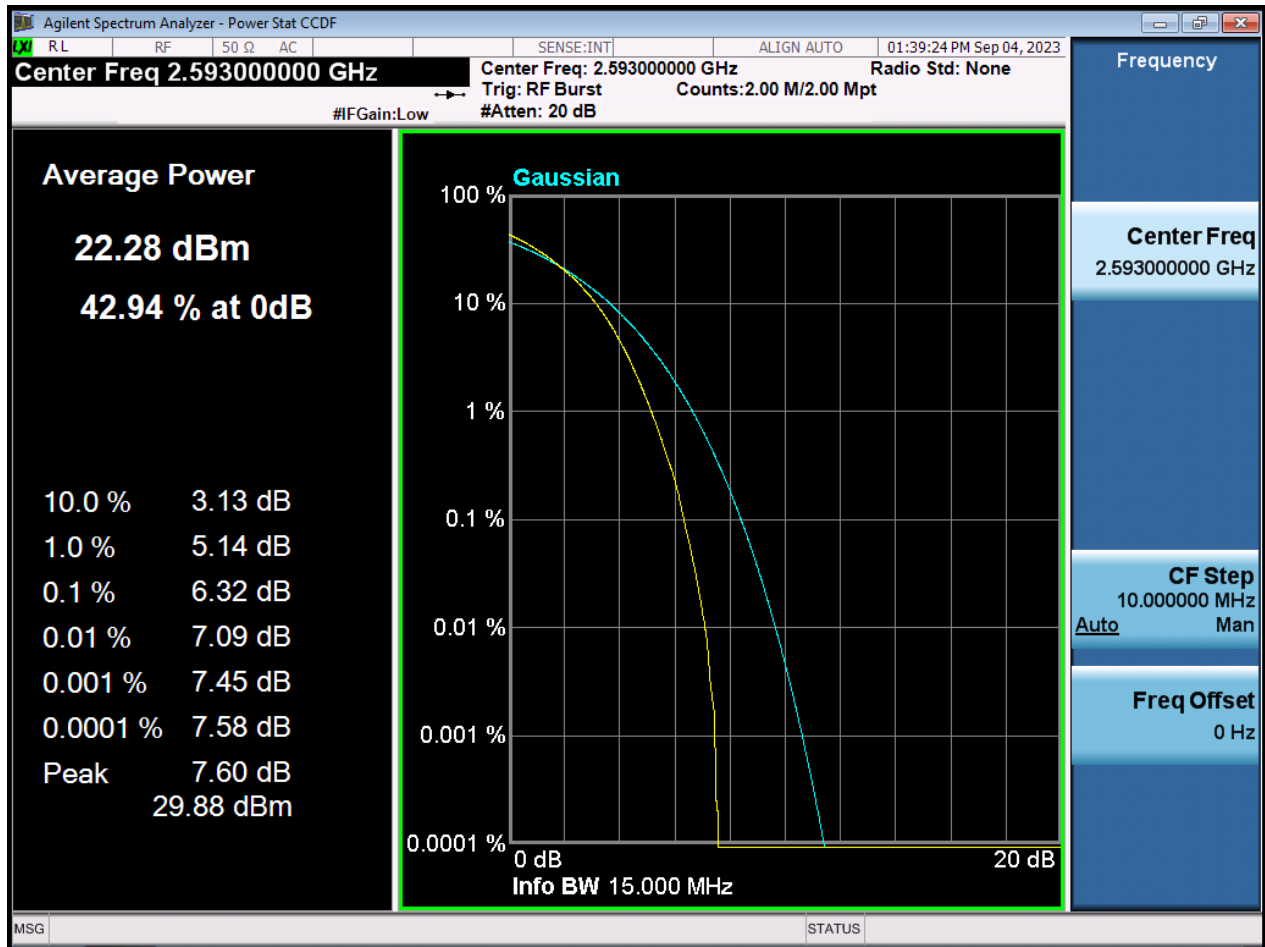


LTE41_20 M_PAR_Mid Channel_QPSK_Full RB

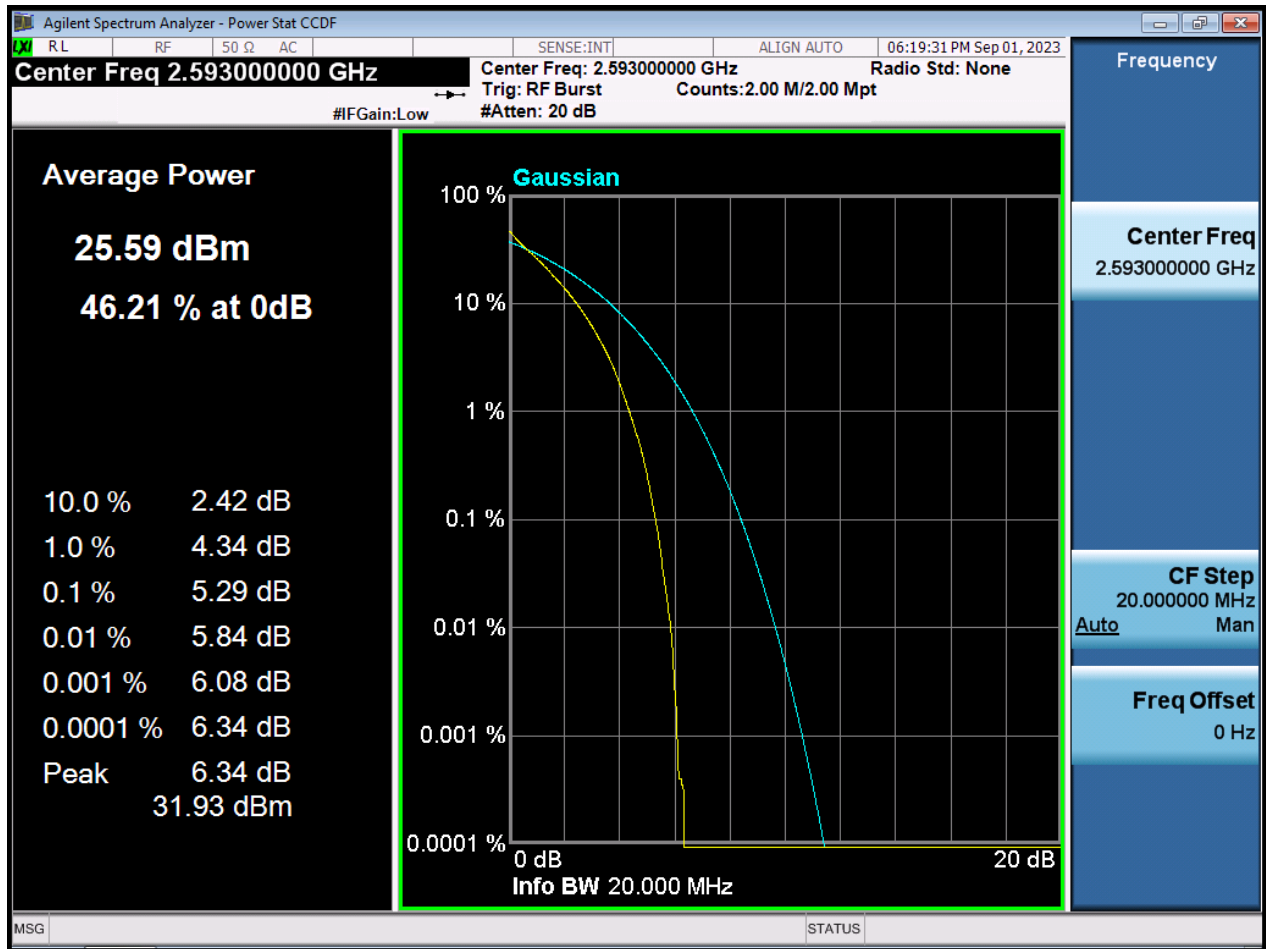


LTE41_20 M_PAR_Mid Channel_16QAM_Full RB

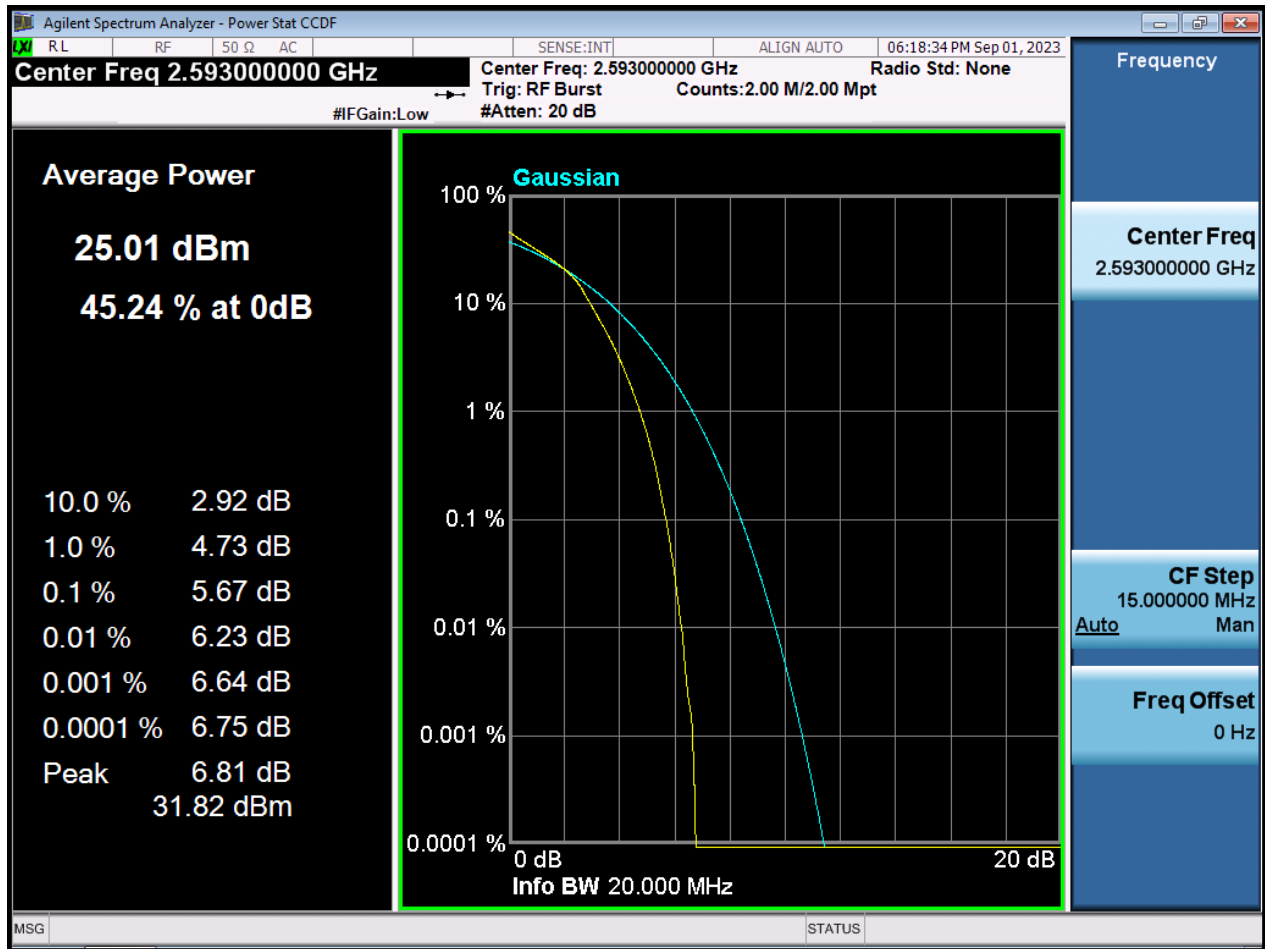


LTE41_20 M_PAR_Mid Channel_64QAM_Full RB

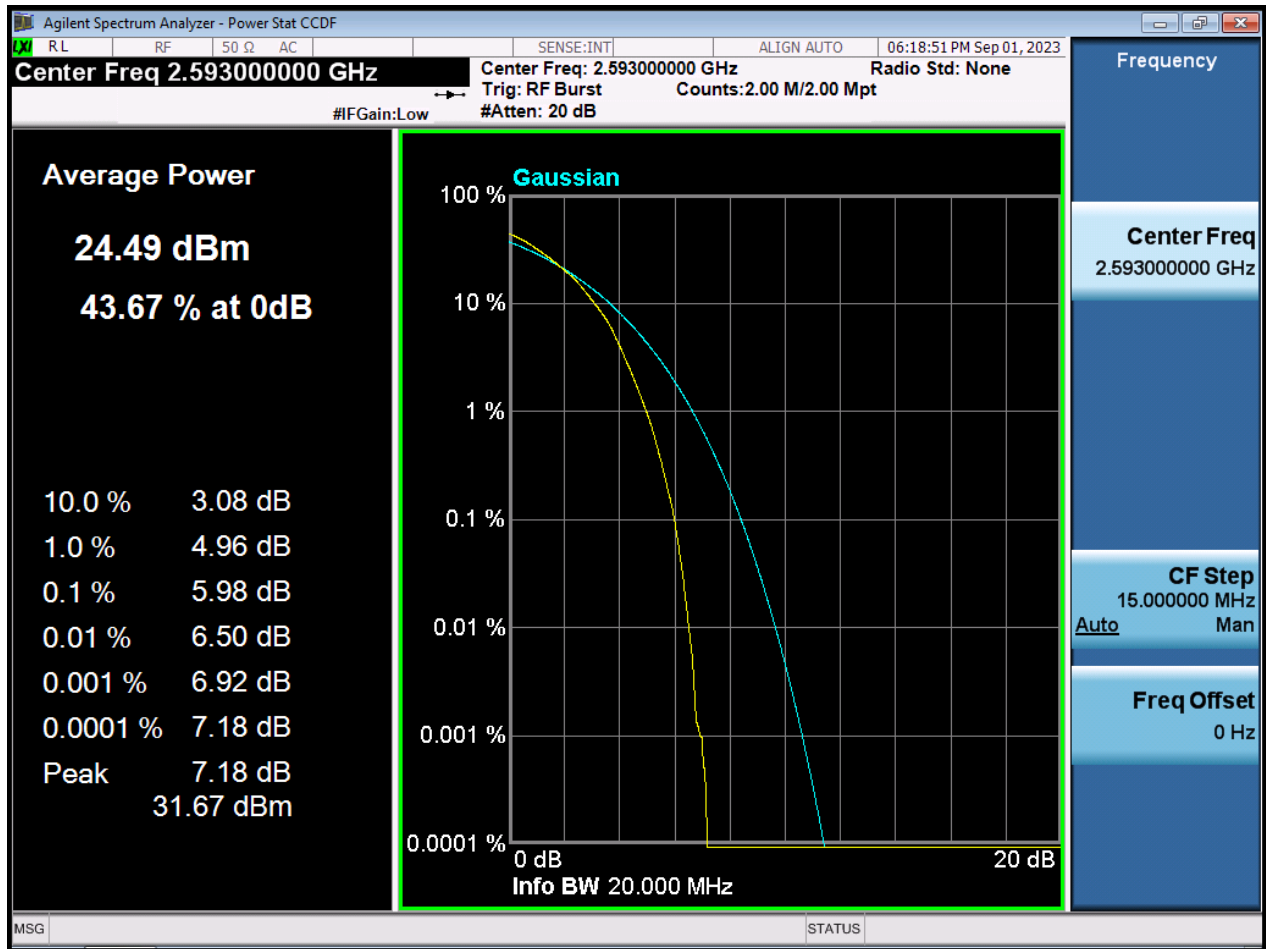


LTE41_20 M_PAR_Mid Channel_256QAM_Full RB

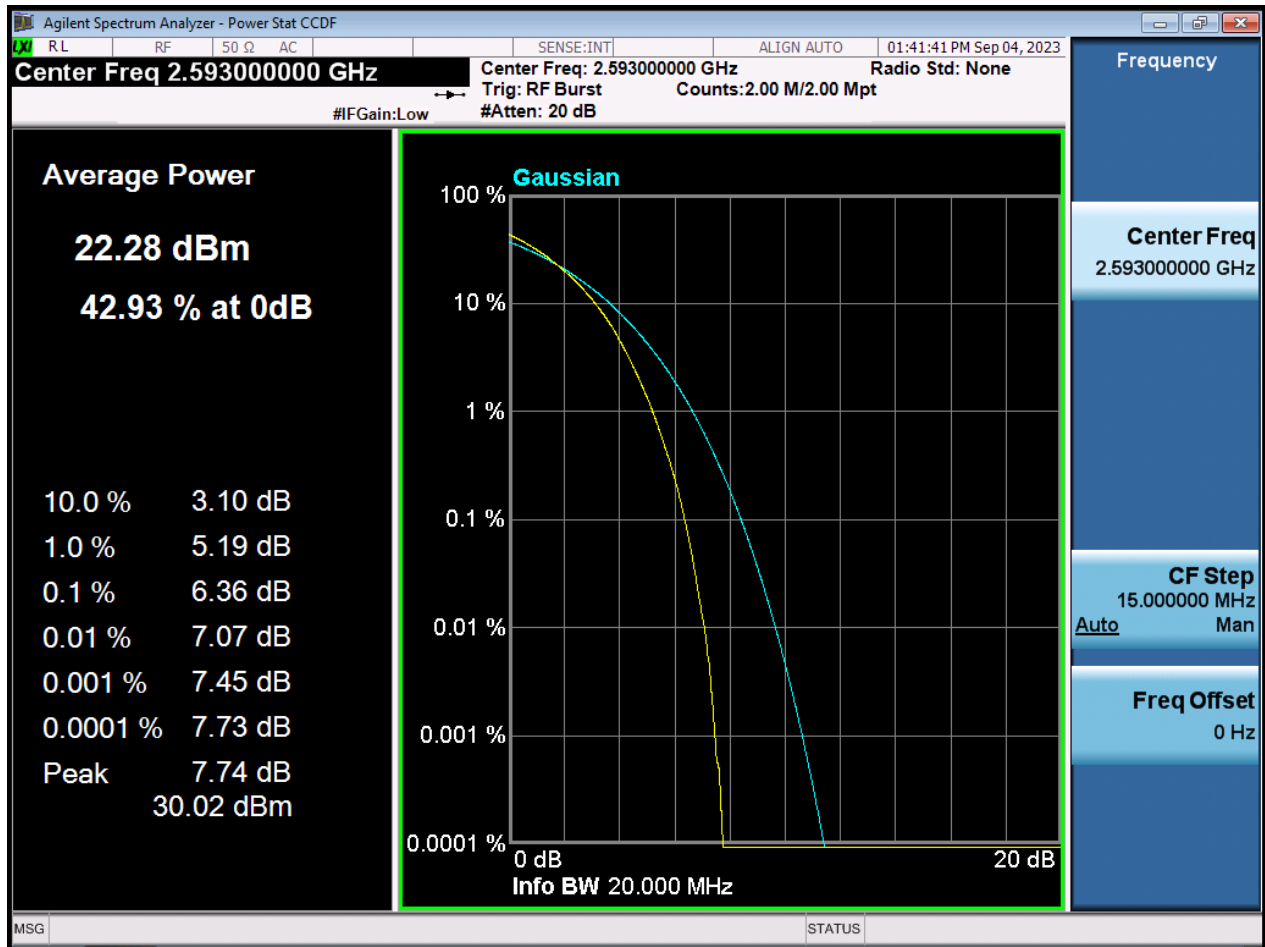


LTE41_5 M_CSE(30 M-10 G)_Lowest Channel

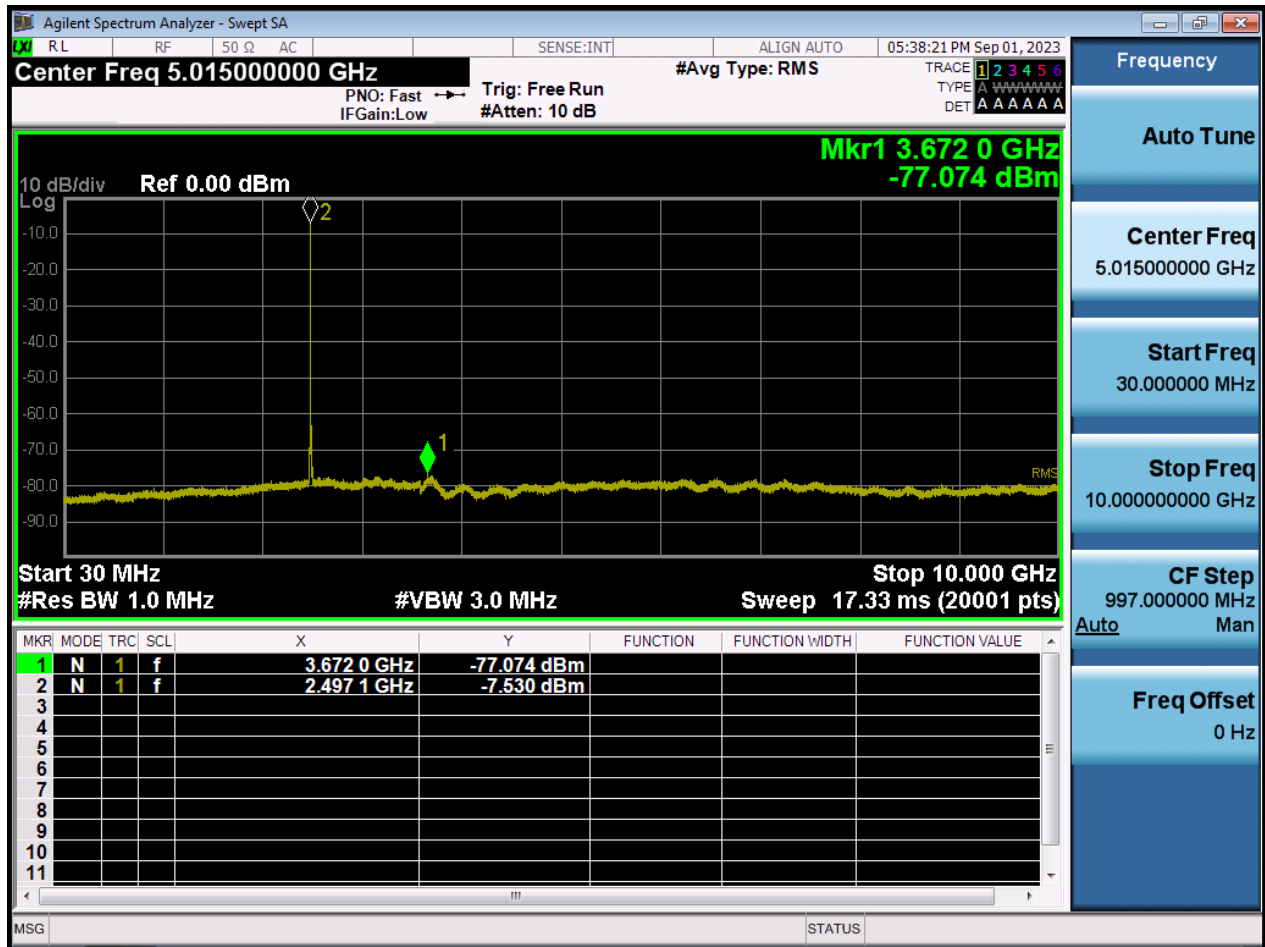


LTE41_5 M_CSE(30 M-10 G)_Mid Channel

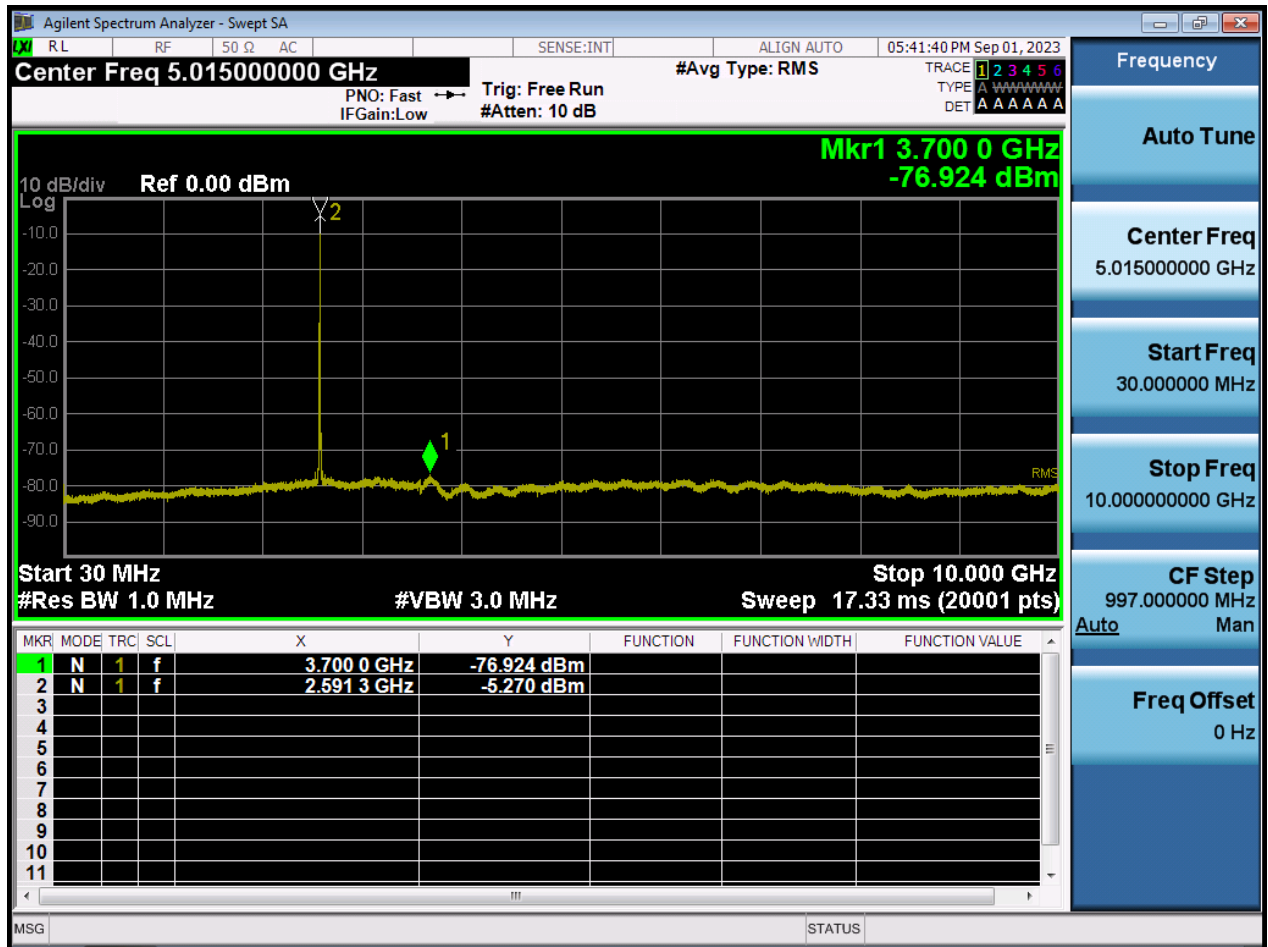


LTE41_5 M_CSE(30 M-10 G)_Highest Channel

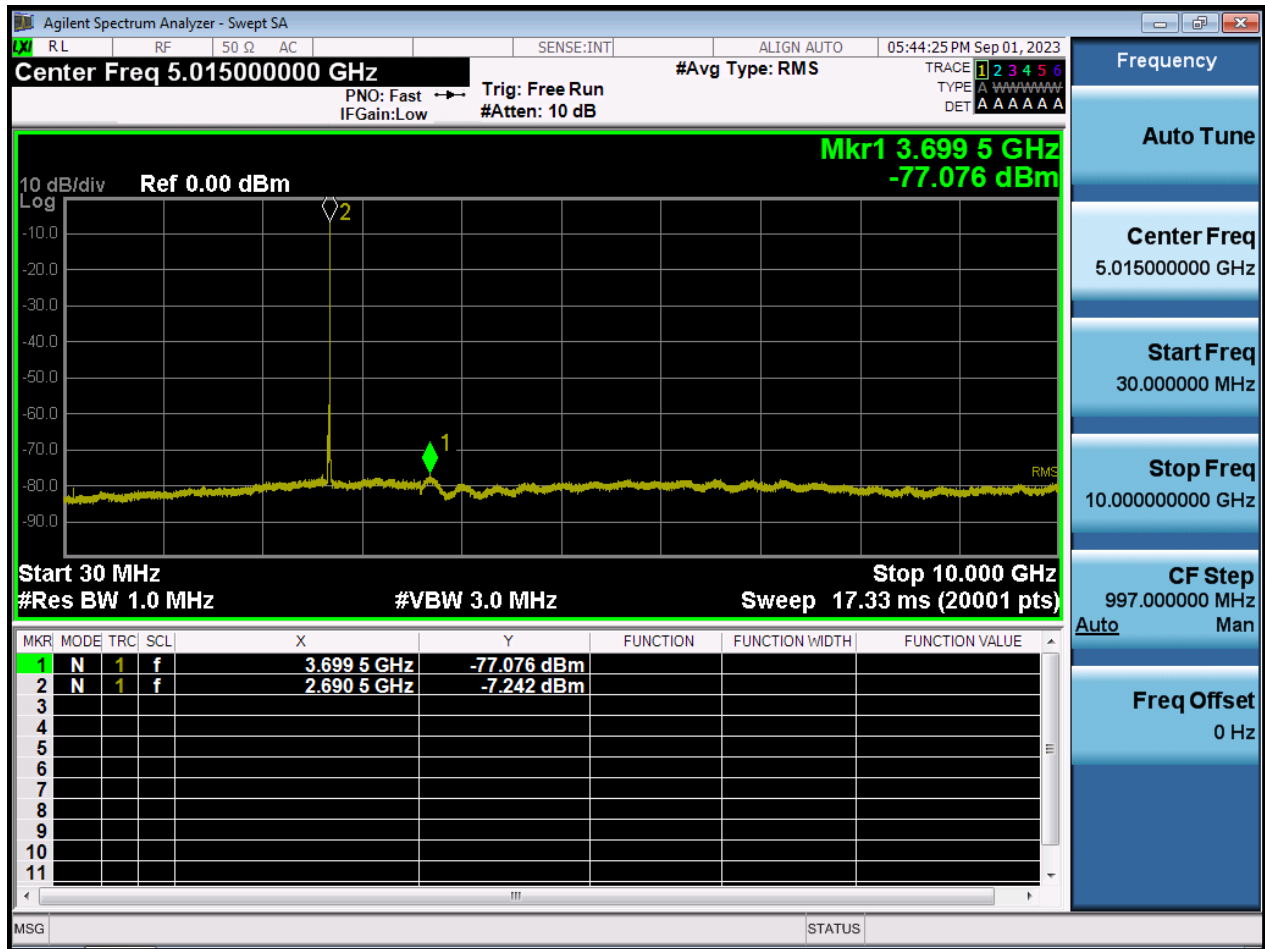


LTE41_10 M_CSE(30 M-10 G)_Lowest Channel

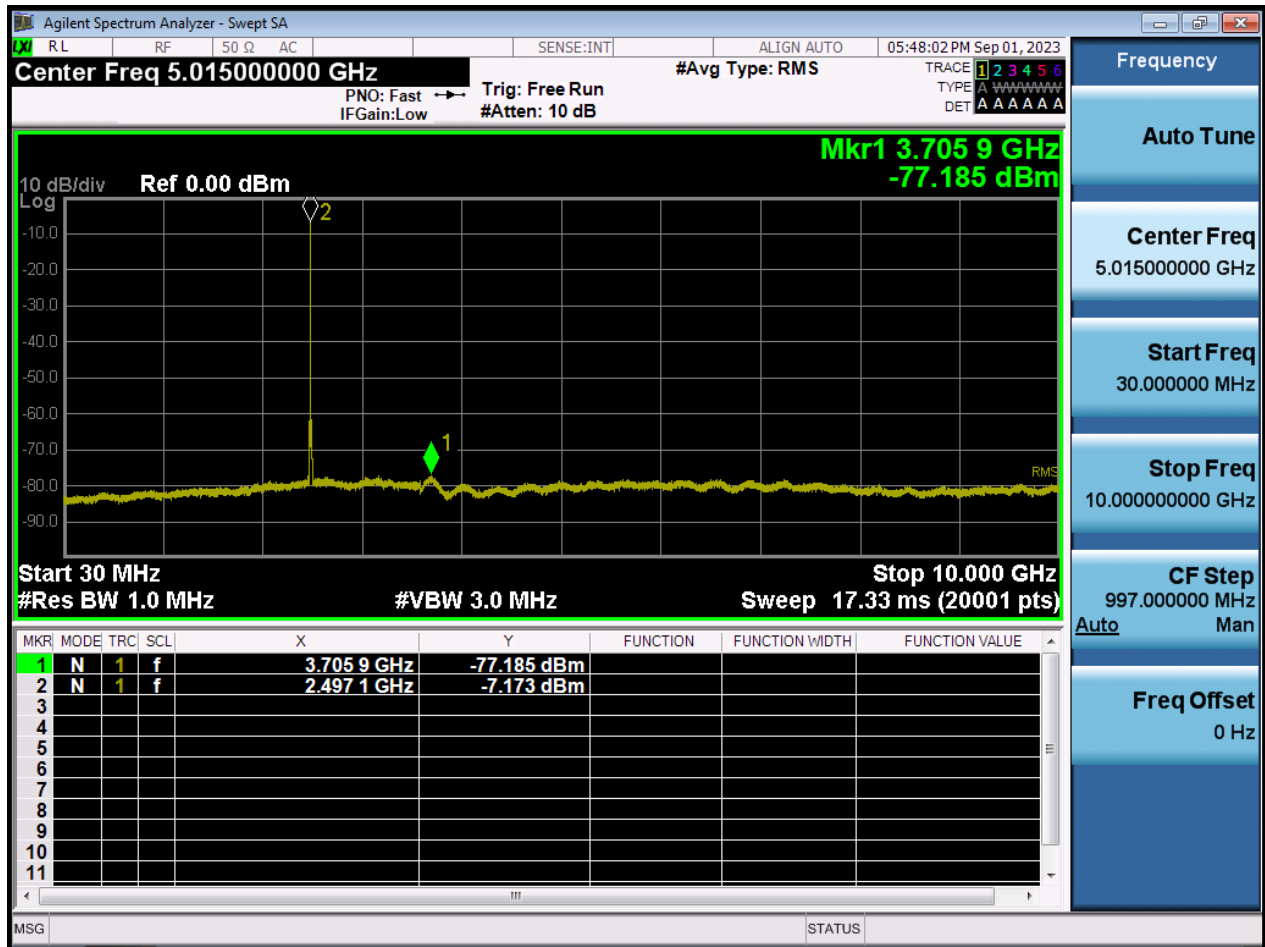


LTE41_10 M_CSE(30 M-10 G)_Mid Channel

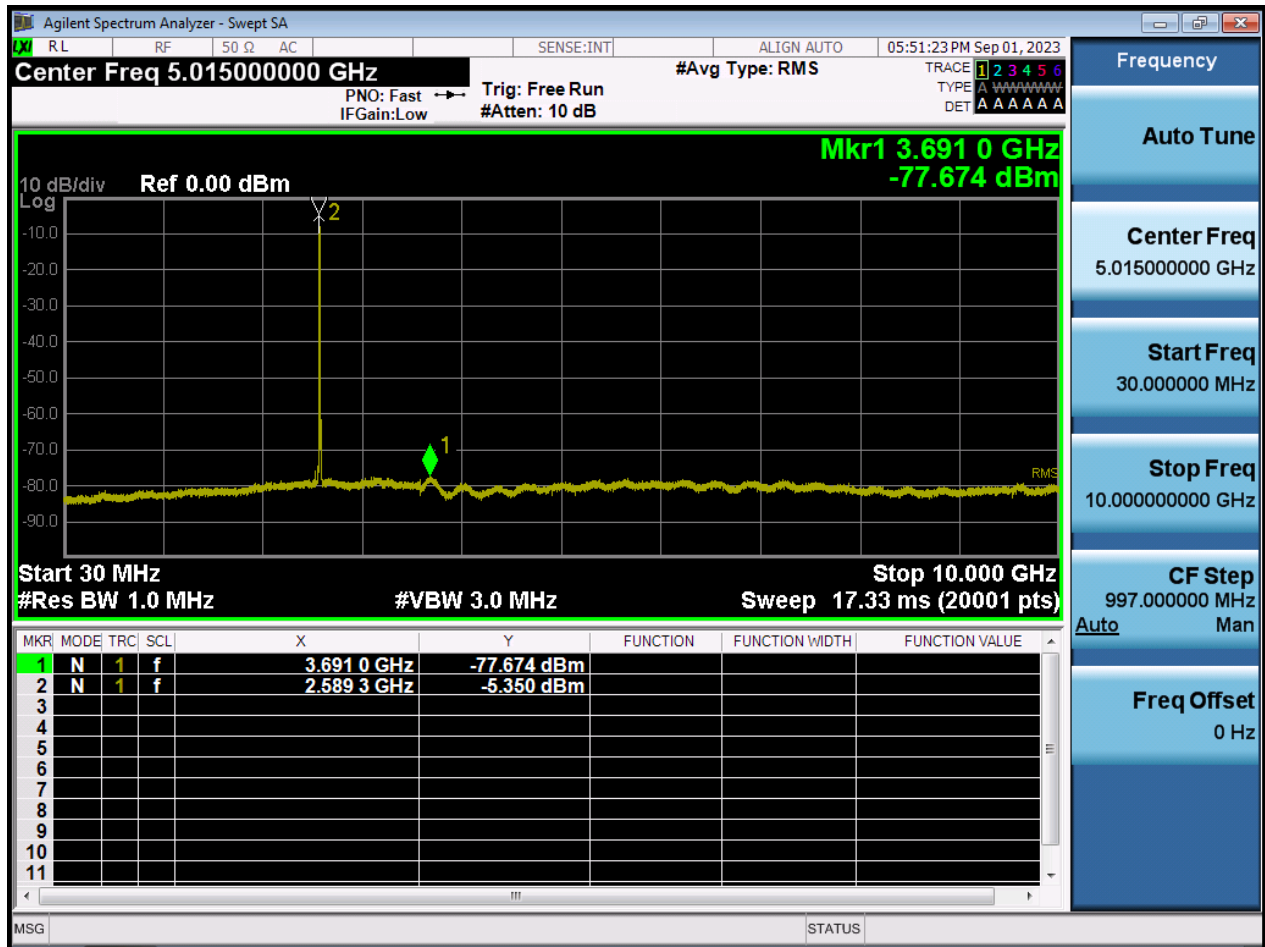


LTE41_10 M_CSE(30 M-10 G)_Highest Channel

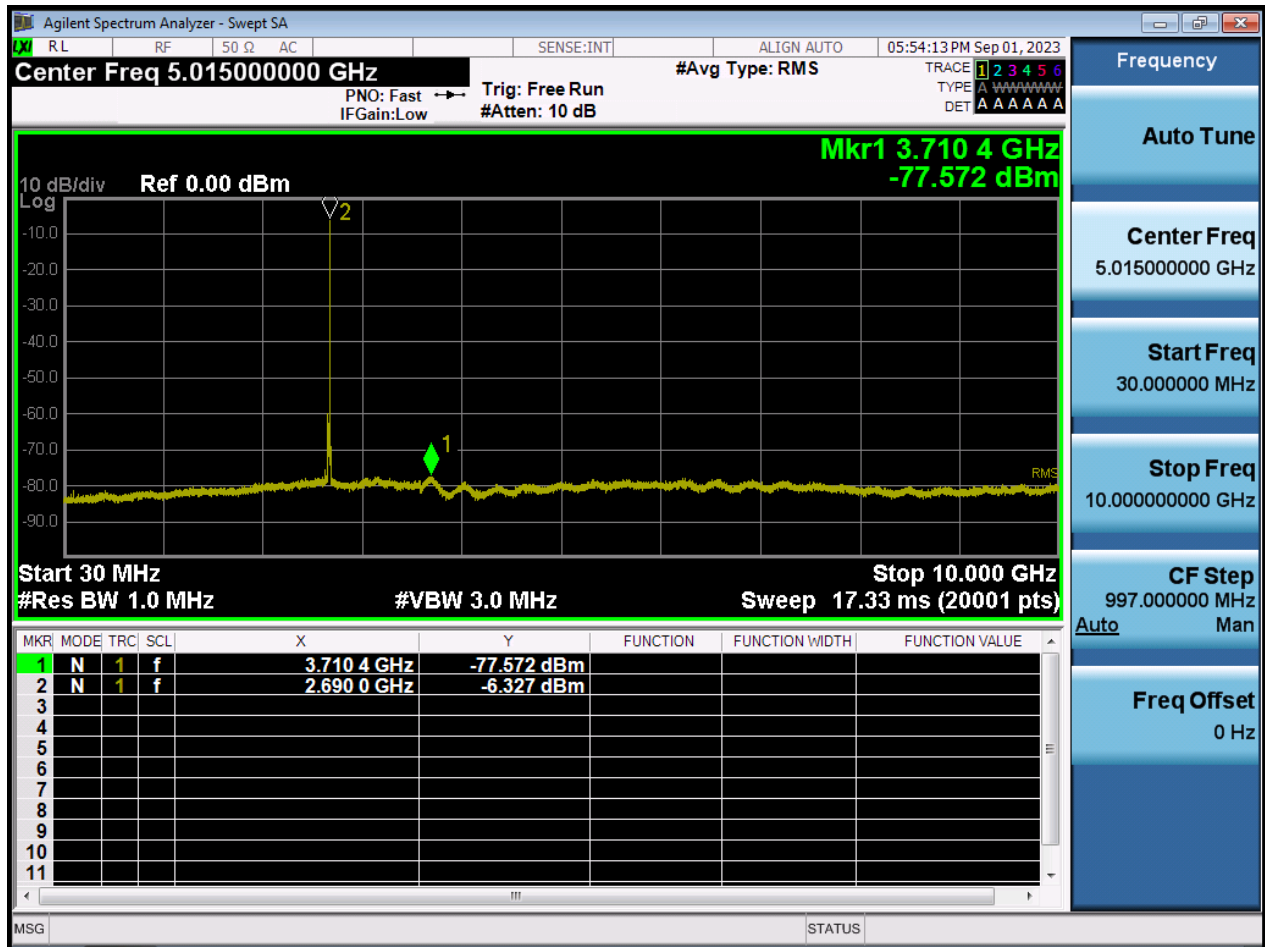


LTE41_15 M_CSE(30 M-10 G)_Lowest Channel

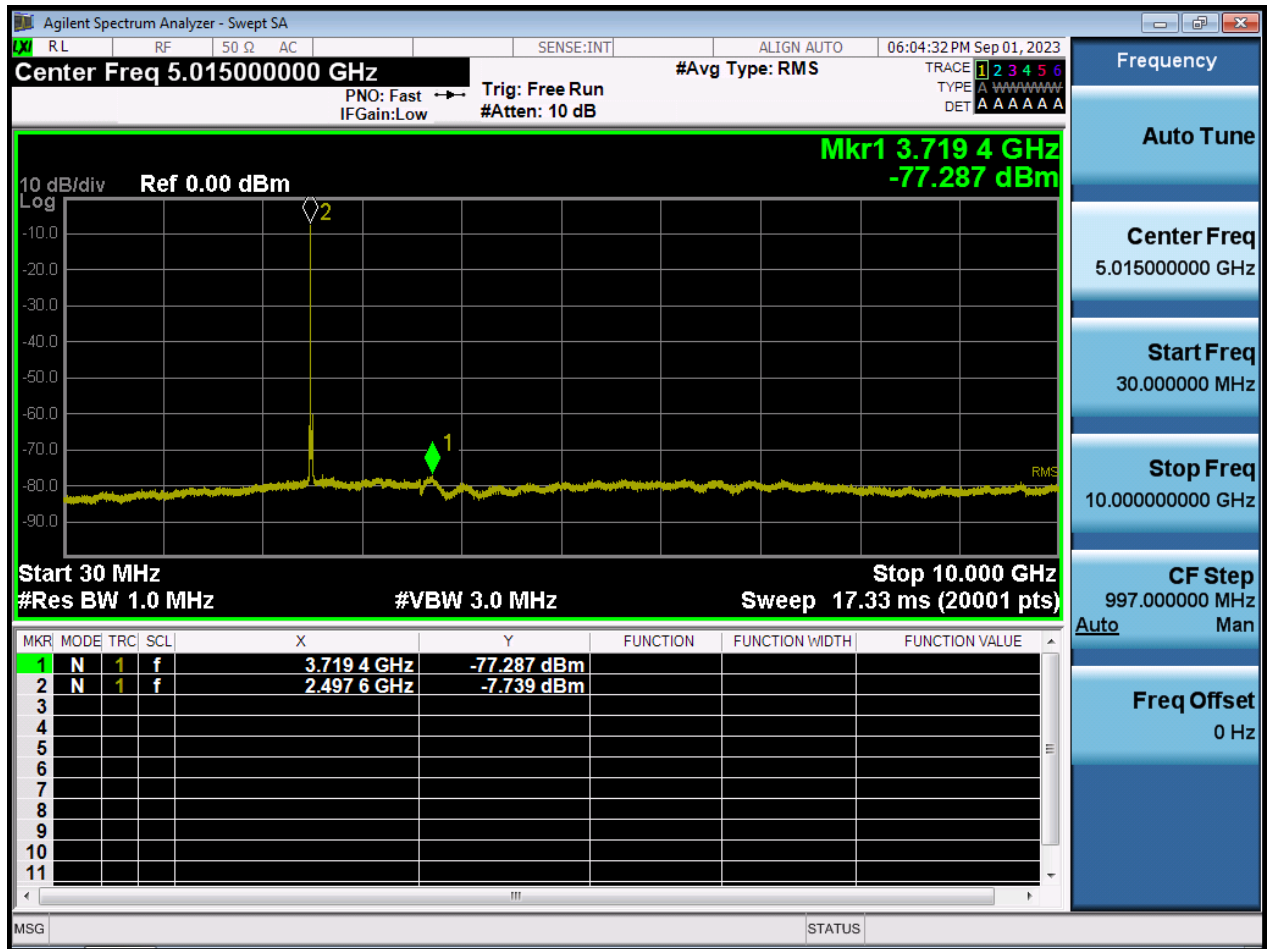


LTE41_15 M_CSE(30 M-10 G)_Mid Channel

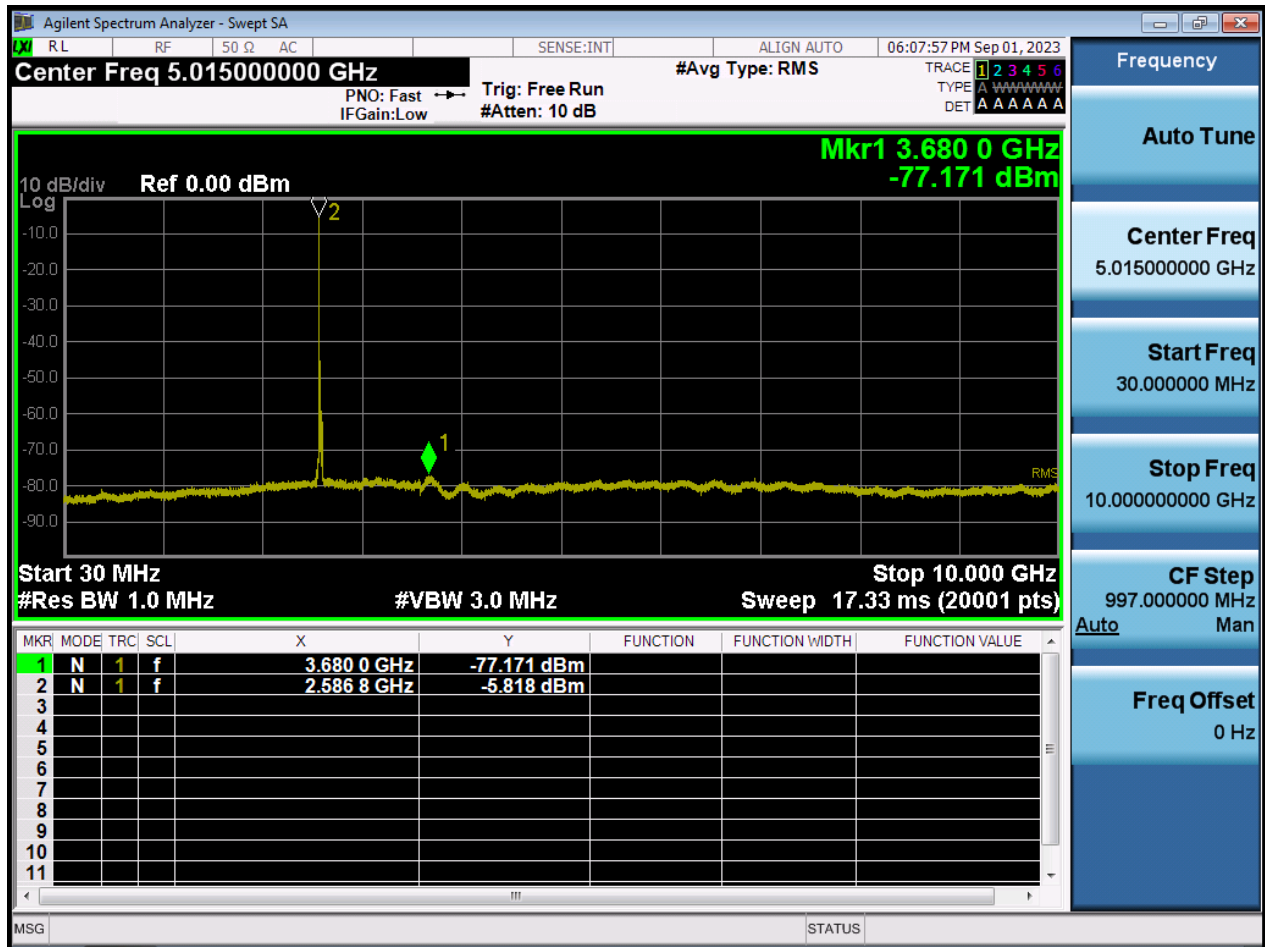


LTE41_15 M_CSE(30 M-10 G)_Highest Channel

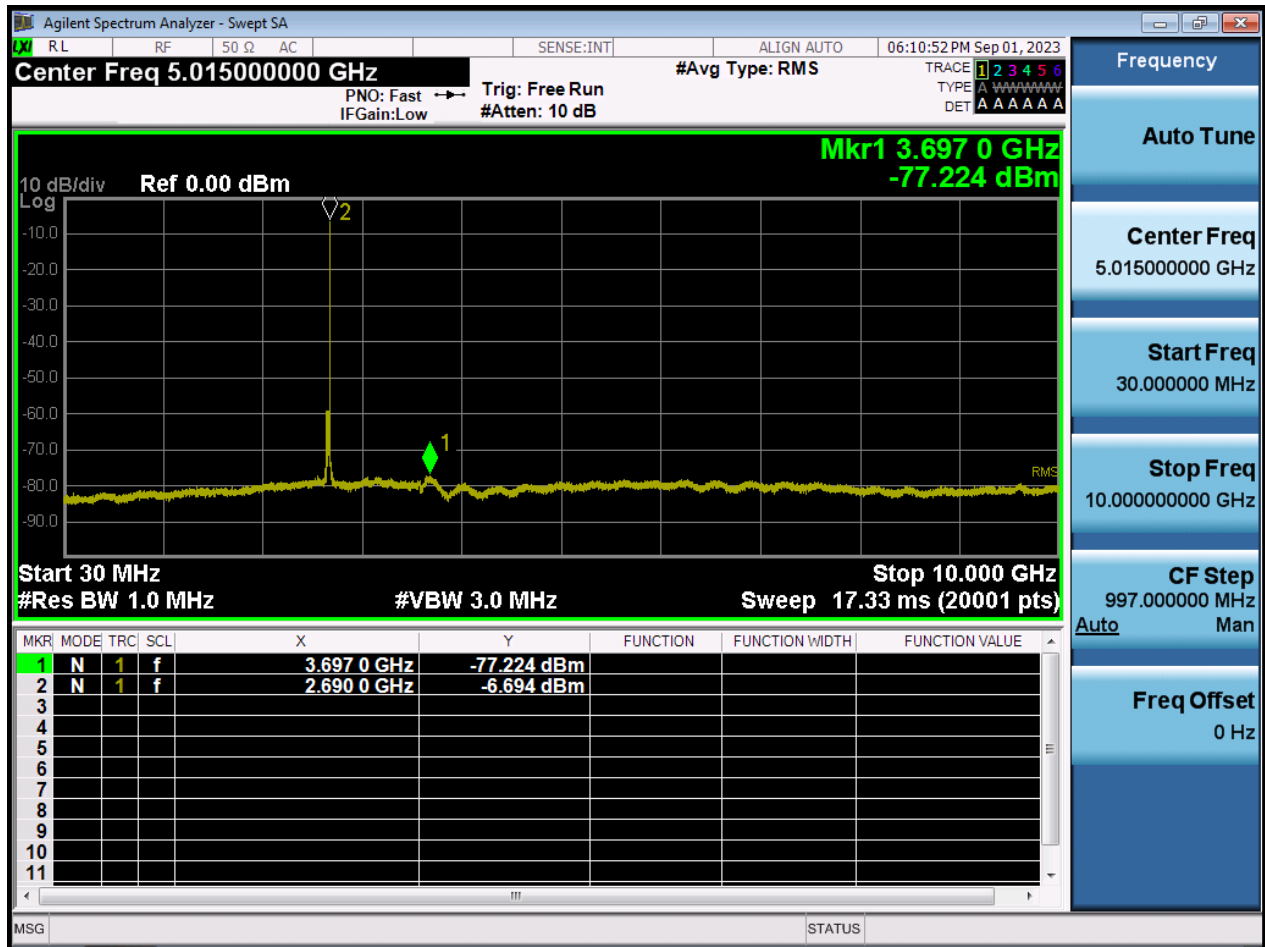


LTE41_20 M_CSE(30 M-10 G)_Lowest Channel

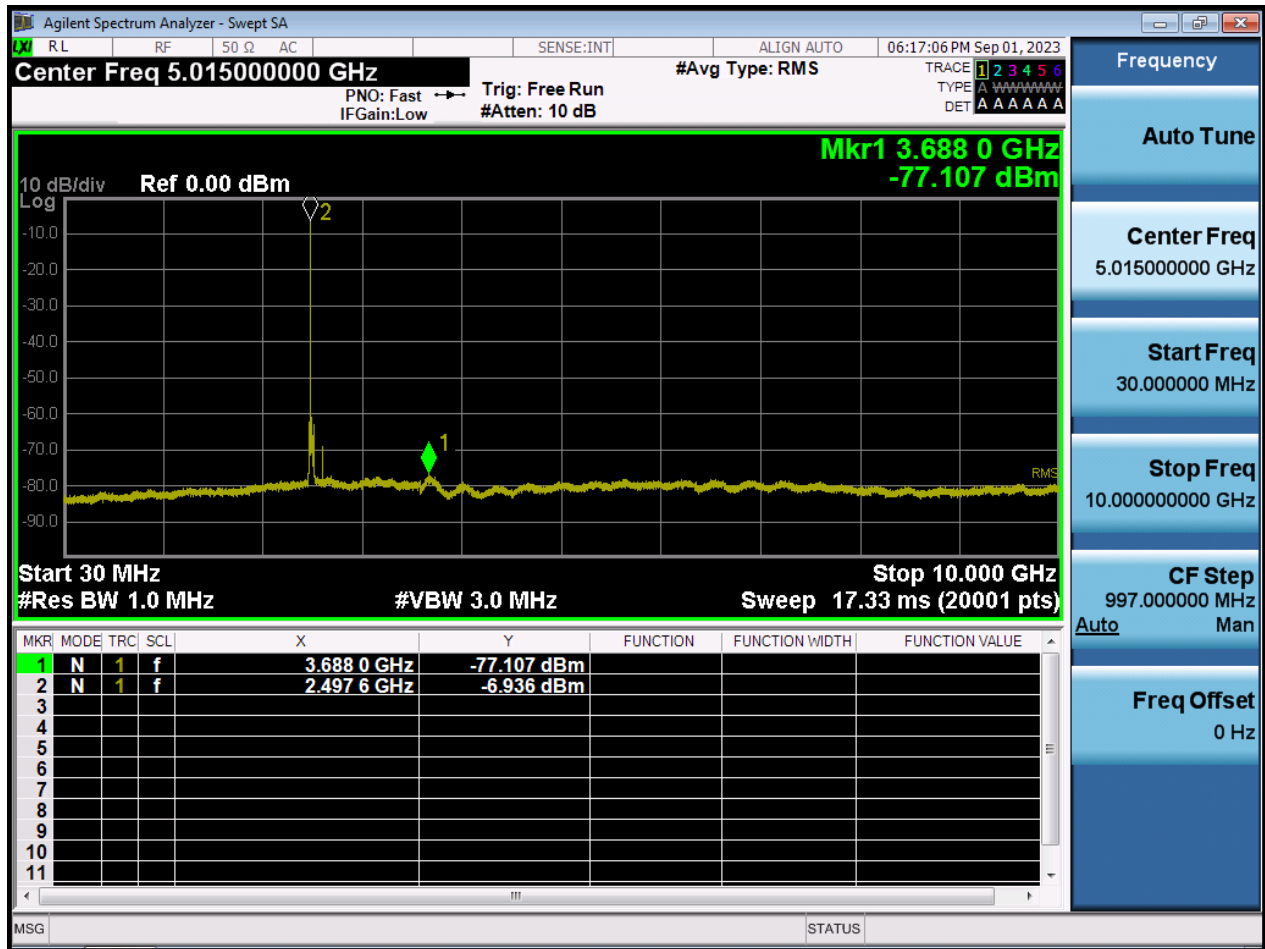

LTE41_20 M_CSE(30 M-10 G)_Mid Channel

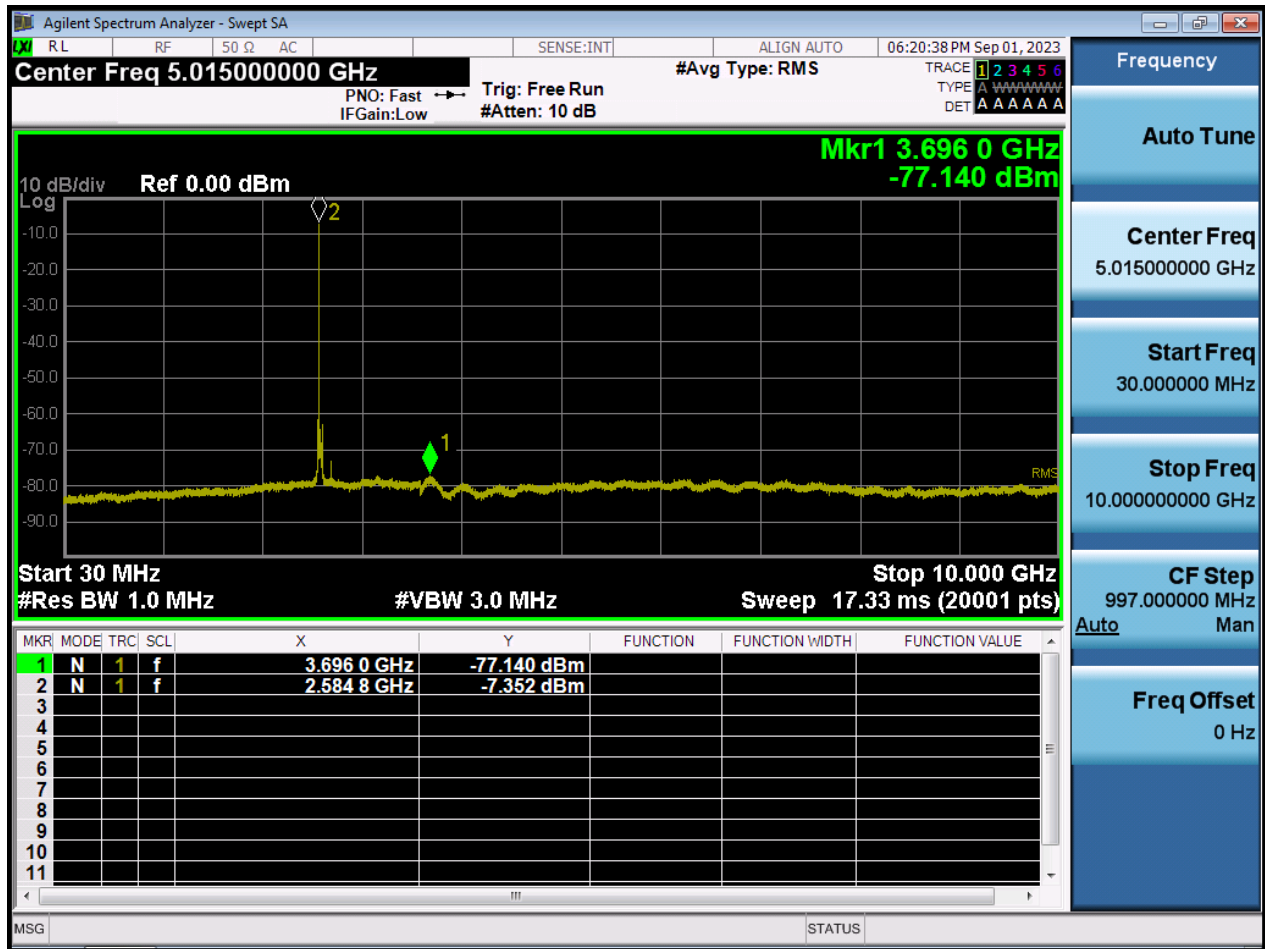

LTE41_20 M_CSE(30 M-10 G)_Highest Channel

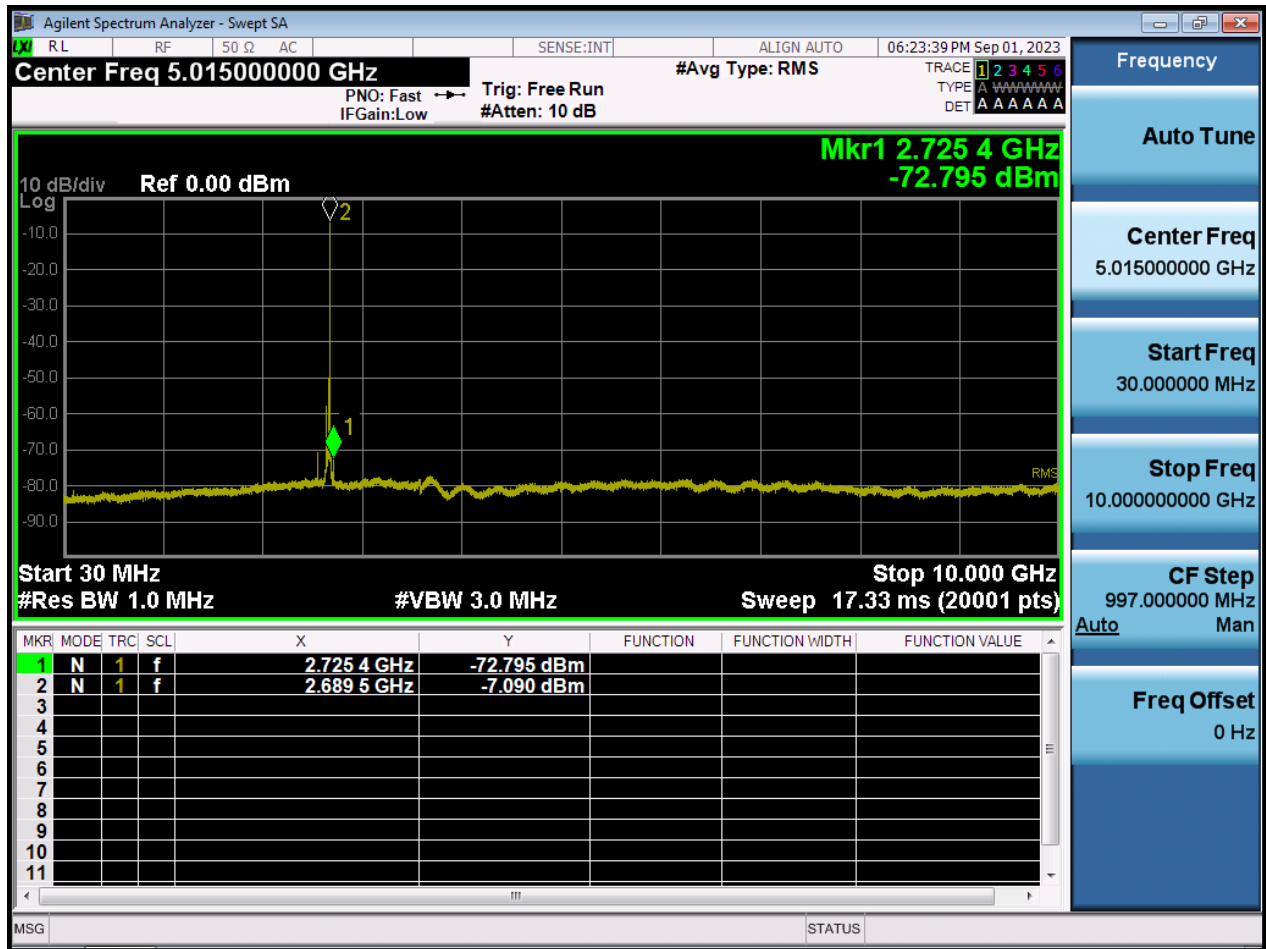

LTE41_5 M_CSE(Above10 G)_Lowest Channel



LTE41_5 M_CSE(Above10 G)_Mid Channel



LTE41_5 M_CSE(Above10 G)_Highest Channel



LTE41_10 M_CSE(Above10 G)_Lowest Channel



LTE41_10 M_CSE(Above10 G)_Mid Channel



LTE41_10 M_CSE(Above10 G)_Highest Channel



LTE41_15 M_CSE(Above10 G)_Lowest Channel



LTE41_15 M_CSE(Above10 G)_Mid Channel



LTE41_15 M_CSE(Above10 G)_Highest Channel



LTE41_20 M_CSE(Above10 G)_Lowest Channel



LTE41_20 M_CSE(Above10 G)_Mid Channel



LTE41_20 M_CSE(Above10 G)_Highest Channel



11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2310-FC069-P