

TEST REPORT

FCC UNII 6G Test for SM-S931B/DS
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2411-FC005-R3

DATE OF ISSUE
November 19, 2024

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

REPORT NO.

HCT-RF-2411-FC005-R3

DATE OF ISSUE

November 19, 2024

Additional Model

SM-S931B

Applicant

SAMSUNG Electronics Co., Ltd.

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name

Mobile Phone

Model Name

SM-S931B/DS

FCC ID

A3LSMS931B

Date of Test

September 06, 2024 ~ November 04, 2024

Modulation type

OFDM/OFDMA

FCC Classification

15E 6 GHz Low Power Dual Client
15E 6 GHZ Very Low Power Device

Test Standard Used

FCC Rule Part(s): Part 15.407

Test Results

PASS

Location of Test

☒ Permanent Testing Lab ☐ On Site Testing Lab

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	November 04, 2024	Initial Release
1	November 07, 2024	- Page 43, Revised Very Low Power P.S.D Limit - Page 11, 187, 188, 194, Revised Very Low Power Typo.
2	November 18, 2024	- Revised the Summary table on page 43.
3	November 19, 2024	- Revised the Summary table on page 43-44. - Revised the Title on page 134.

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	6
EUT DESCRIPTION	6
ANTENNA CONFIGURATIONS	7
2. MAXIMUM OUTPUT POWER	10
3. TEST METHODOLOGY	12
EUT CONFIGURATION	12
EUT EXERCISE	12
GENERAL TEST PROCEDURES	12
DESCRIPTION OF TEST MODES	13
4. INSTRUMENT CALIBRATION	13
5. FACILITIES AND ACCREDITATIONS	13
5.1 FACILITIES	13
5.2 EQUIPMENT	13
6. ANTENNA REQUIREMENTS	14
7. MEASUREMENT UNCERTAINTY	14
8. DESCRIPTION OF TESTS	15
9. SUMMARY OF TEST RESULTS	43
10. TEST RESULT	45
10.1 DUTY CYCLE	45
10.2 26 dB BANDWIDTH & 99 % Occupied BANDWIDTH	54
10.2.1 26 dB BANDWIDTH(Indoor client)	54
10.2.1.1 Ant1	54
10.2.1.2 Ant2	71
10.2.2 26 dB BANDWIDTH(Standard client)	87
10.2.2.1 Ant1	87
10.2.2.2 Ant2	98
10.2.3 26 dB BANDWIDTH(Very Low Power Device)	109
10.2.3.1 Ant1	109
10.2.3.2 Ant2	122
10.3 OUTPUT POWER MEASUREMENT	140
10.3.1 E.I.R.P Output Power(Indoor client)	140
10.3.1.1 MIMO_CDD(Ant1+Ant2)	141
10.3.2 E.I.R.P Output Power(Standard client)	165
10.3.2.1 MIMO_CDD(Ant1+Ant2)	166
10.3.3 E.I.R.P Output Power(Very Low Power Device)	180
10.3.3.1 MIMO_CDD(Ant1+Ant2)	181
10.4 POWER SPECTRAL DENSITY	195
10.4.1 Indoor client	195

10.4.1.1 MIMO_CDD(Ant1+Ant2)	196
10.4.2 Standard client	220
10.4.2.1 MIMO_CDD(Ant1+Ant2)	221
10.4.3 Very Low Power Device	235
10.4.3.1 MIMO_CDD(Ant1+Ant2)	236
10.5 In-Band Emission	268
10.6 Contention Based Protocol	353
10.7 Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	369
10.8 Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	373
10.9 Transmit Power Control, Very Low Power Devices	377
10.10 FREQUENCY STABILITY.	379
10.10.1 160 MHz BW	379
10.11 RADIATED SPURIOUS EMISSIONS (9 kHz – 1 GHz)	395
10.12 RADIATED SPURIOUS EMISSIONS (Above 1 GHz)	396
10.12.1 Standard Client	396
10.12.2 Indoor Client	422
10.13 RADIATED RESTRICTED BAND EDGE	430
10.13.1 Standard Client	430
10.13.2 Indoor Client	441
10.14 POWERLINE CONDUCTED EMISSIONS	456
11. LIST OF TEST EQUIPMENT	457
12. ANNEX A_ TEST SETUP PHOTO	459

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SM-S931B/DS	
Additional Model	SM-S931B	
EUT Type	Mobile Phone	
Power Supply	DC 3.88 V	
Modulation Type	OFDM/OFDMA	
Frequency Range (MHz)	Indoor Client	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345 320 MHz BW : 6105 - 6265
	U-NII-6	20 MHz BW : 6435 - 6515 40 MHz BW : 6445 - 6525 80 MHz BW : 6465 - 6545 160 MHz BW : 6505 320 MHz BW : 6425 - 6585
	U-NII-7	20 MHz BW : 6535 - 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 - 6785 160 MHz BW : 6665
	U-NII-8	20 MHz BW : 6875 - 7115 40 MHz BW : 6885 - 7085 80 MHz BW : 6865 - 7025 160 MHz BW : 6825 - 6985 320 MHz BW : 6745 - 6905
	Standard Client, Very Low Power Device	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345 320 MHz BW : 6105 - 6265
	U-NII-7	20 MHz BW : 6535 - 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 - 6785 160 MHz BW : 6665
Straddle channel	Supported	
Channel Puncturing	Supported (This device only punctures to optimize network performance and never to avoid licensed incumbents)	
Antenna Specification	Type: Metal	
Serial number	Conducted : R3CX80PTAZK Radiated : R3CX80PTCNH Conducted(CBP, Dual Client, Proper Power Adjustment test, TPC) : R3CX80V3KVM	

ANTENNA CONFIGURATIONS

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11a	O	O	O	X
802.11ax (HE20/40/80/160)	O	O	O	O
802.11be (EHT20/40/80/160/320)	O	O	O	O
802.11be (EHT20/40/80/160/320)_MRU	O	O	O	O

Note:

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	BT Ant.1	BT Ant.2	Test Case
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on	-	-	-	-	Scenario1
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.1	-	on	on	-	-	-	on	-	-
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi ANT.2	-	on	-	on	-	-	on	-	Scenario2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	-	on	on	on	-	-	on	-	Scenario3

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii), f) ii)

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \text{LOG}(N_{ANT} / N_{SS})$$

Band	Ant Gain (dBi)		N _{ANT} / N _{SS}	Directional Gain (dBi)	
	ANT1	ANT2		CDD	SDM
UNII 5	-2.45	-4.02	2 / 2	-0.19	-2.45
UNII 6	-3.96	-5.08		-1.49	-3.96
UNII 7	-3.96	-5.08		-1.49	-3.96
UNII 8	-3.99	-5.26		-1.59	-3.99

Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional Gain(CDD)} = 10 \cdot \log \left(\left(10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)} \right)^2 / 2 \right) \text{ dBi}$$

$$\text{Directional gain(SDM)} = G_{\max} + 10 \cdot \log(N_{ANT} / N_{SS}),$$

Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

2. MAXIMUM OUTPUT POWER

The transmitter has a Maximum Conducted Output Power and EIRP Power as follows:

[Indoor Client]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	8.21	0.007	7.66	0.006	10.95	0.012	10.76	0.012
	EHT40	11.36	0.014	10.31	0.011	13.88	0.024	13.69	0.023
	EHT80	13.63	0.023	12.17	0.016	15.97	0.040	15.78	0.038
	EHT160	14.29	0.027	14.62	0.029	17.47	0.056	17.28	0.053
	EHT320	14.29	0.027	14.31	0.027	17.31	0.054	17.12	0.052
	802.11a	8.21	0.007	7.60	0.006	10.92	0.012	10.73	0.012
UNII6	EHT20	8.52	0.007	8.78	0.008	11.67	0.015	10.18	0.010
	EHT40	11.89	0.015	12.02	0.016	14.96	0.031	13.47	0.022
	EHT80	13.71	0.023	14.07	0.026	16.91	0.049	15.42	0.035
	EHT160	13.47	0.022	13.96	0.025	16.73	0.047	15.24	0.033
	EHT320	13.84	0.024	14.02	0.025	16.94	0.049	15.45	0.035
	802.11a	8.63	0.007	8.76	0.008	11.71	0.015	10.22	0.011
UNII7	EHT20	8.97	0.008	9.00	0.008	11.99	0.016	10.50	0.011
	EHT40	11.98	0.016	11.75	0.015	14.88	0.031	13.39	0.022
	EHT80	14.18	0.026	14.01	0.025	17.11	0.051	15.62	0.036
	EHT160	14.26	0.027	14.07	0.026	17.18	0.052	15.69	0.037
	802.11a	8.32	0.007	8.51	0.007	11.43	0.014	9.94	0.010
UNII8	EHT20	8.54	0.007	9.21	0.008	11.90	0.015	10.31	0.011
	EHT40	12.28	0.017	11.74	0.015	15.02	0.032	13.43	0.022
	EHT80	14.27	0.027	13.63	0.023	16.97	0.050	15.38	0.035
	EHT160	14.09	0.026	14.05	0.025	17.08	0.051	15.49	0.035
	EHT320	14.24	0.027	14.10	0.026	17.18	0.052	15.59	0.036
	802.11a	9.10	0.008	8.37	0.007	11.76	0.015	10.17	0.010

[Standard Client]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	15.52	0.036	14.95	0.031	18.25	0.067	18.06	0.064
	EHT40	15.44	0.035	14.86	0.031	18.17	0.066	17.98	0.063
	EHT80	15.62	0.037	14.74	0.030	18.21	0.066	18.02	0.063
	EHT160	15.63	0.037	15.28	0.034	18.47	0.070	18.28	0.067
	EHT320	15.32	0.034	15.36	0.034	18.35	0.068	18.16	0.065
	802.11a	15.38	0.034	14.77	0.030	18.09	0.064	17.90	0.062
UNII7	EHT20	15.18	0.033	14.93	0.031	18.06	0.064	16.57	0.045
	EHT40	15.17	0.033	14.93	0.031	18.06	0.064	16.57	0.045
	EHT80	15.21	0.033	14.74	0.030	17.99	0.063	16.50	0.045
	EHT160	15.15	0.033	14.98	0.031	18.08	0.064	16.59	0.046
	802.11a	15.08	0.032	14.55	0.028	17.83	0.061	16.34	0.043

[Very Low Power Device]

Band	Mode	MIMO_CDD(Ant.1+Ant.2)							
		Output Power						EIRP Power	
		Ant.1		Ant.2		Ant.1 + Ant.2		Ant.1 + Ant.2	
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)
UNII5	EHT20	3.39	0.002	2.76	0.002	6.09	0.004	5.90	0.004
	EHT40	6.94	0.005	5.98	0.004	9.50	0.009	9.31	0.009
	EHT80	9.98	0.010	9.52	0.009	12.77	0.019	12.58	0.018
	EHT160	10.80	0.012	10.61	0.012	13.72	0.024	13.53	0.023
	EHT320	11.44	0.014	10.72	0.012	14.11	0.026	13.92	0.025
	802.11a	3.91	0.002	2.40	0.002	6.23	0.004	6.04	0.004
UNII7	EHT20	5.42	0.003	4.68	0.003	8.08	0.006	6.59	0.005
	EHT40	8.22	0.007	7.97	0.006	11.11	0.013	9.62	0.009
	EHT80	11.07	0.013	10.67	0.012	13.88	0.024	12.39	0.017
	EHT160	11.22	0.013	11.22	0.013	14.23	0.027	12.74	0.019
	802.11a	3.66	0.002	2.56	0.002	6.15	0.004	4.66	0.003

3. TEST METHODOLOGY

U-NII 6 GHz devices operating in the 5.925-7.125 GHz band was tested using the following measurement procedure.

[1] FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03(October 10, 2024)

[2] KDB 789033 D02 General UNII Test Procedures New Rules v02r01(December 14, 2017)

[3] ANSI C63.10(2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203, § 15.407:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203, § 15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

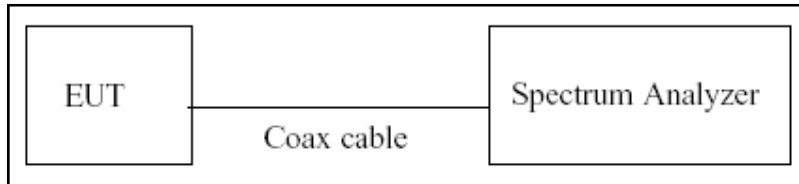

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ($\geq$ RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 26 dB Bandwidth & 99% Occupied Bandwidth

Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

Test Configuration

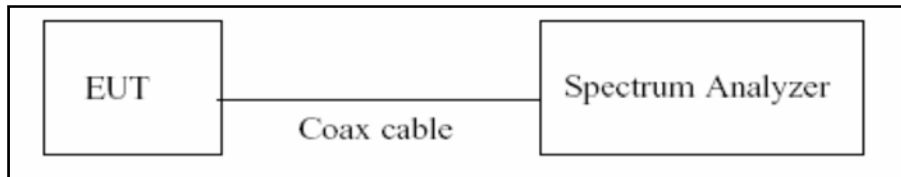

Test Procedure (26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = Max Hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (99 % Occupied Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure D in KDB 789033 D02 v02r01.

1. RBW = 1% ~ 5% of the occupied bandwidth
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = max hold
5. Use the 99% power bandwidth function of the instrument

Note:

1. We tested X dB & 99% bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. The 26 dB bandwidth is used to determine the in-Band Emission limits.

8.3. Output Power Measurement

Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	24 dBm

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

Standard Client Limit

Band	Limit (e.i.r.p)
UNII 5,7	30 dBm

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.


Very Low Power Device Limit

Band	Limit (e.i.r.p)
UNII 5,7	14 dBm

[47 CFR 15.407(a)(9)] For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p must not exceed 14 dBm.

Test Configuration

Power Meter

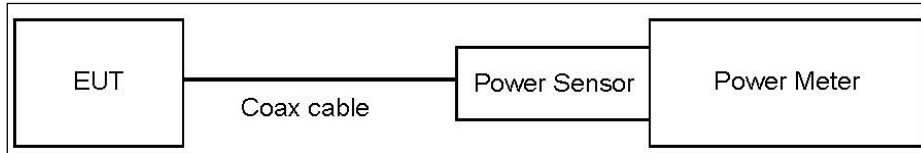

Test Procedure (Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Level(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Power Meter offset

Ant.1: Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.76 dB)

Ant.2: Attenuator loss(10 dB) + Cable loss

2. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 5	11.75	10.99
UNII 6	11.75	10.99
UNII 7	11.75	10.99
UNII 8	11.75	10.99

(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	-1 dBm/MHz

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

Standard Client Limit


Band	Limit (e.i.r.p)
UNII 5,7	17 dBm/MHz

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band

Very Low Power Device Limit

Band	Limit (e.i.r.p)
UNII 5,7	-5 dBm/MHz

[47 CFR 15.407(a)(9)] For very low power devices operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p must not exceed 14 dBm, the maximum power spectral density must not exceed -5 dBm e.i.r.p. in any 1-megahertz band

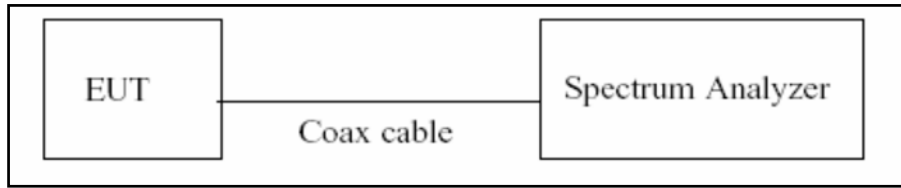Test Configuration**Test Procedure**

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz
3. VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq$ 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Level(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

Ant.1: Attenuator loss(10 dB) + Cable loss + EUT Cable Loss(0.76 dB)

Ant.2: Attenuator loss(10 dB) + Cable loss


2. Actual value of loss for the attenuator and cable combination is below table.

Band	Ant.1 Loss(dB)	Ant.2 Loss(dB)
UNII 5	11.75	10.99
UNII 6	11.75	10.99
UNII 7	11.75	10.99
UNII 8	11.75	10.99

(Actual value of loss for the attenuator and cable combination)

8.5. In-Band Emission (Emissions Mask)

Test Configuration

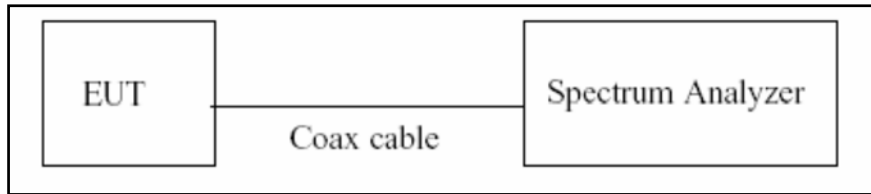


Test Procedure

We tested according to Procedure J in KDB 987594 D02.

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a. Set the span to encompass the entire 26 dB EBW of the signal.
 - b. Set RBW = same RBW used for 26 dB EBW measurement.
 - c. Set VBW $\geq 3 \times$ RBW
 - d. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e. Sweep time = auto.
 - f. Detector = RMS (i.e., power averaging)
 - g. Trace average at least 100 traces in power averaging (rms) mode.
 - h. Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.


6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

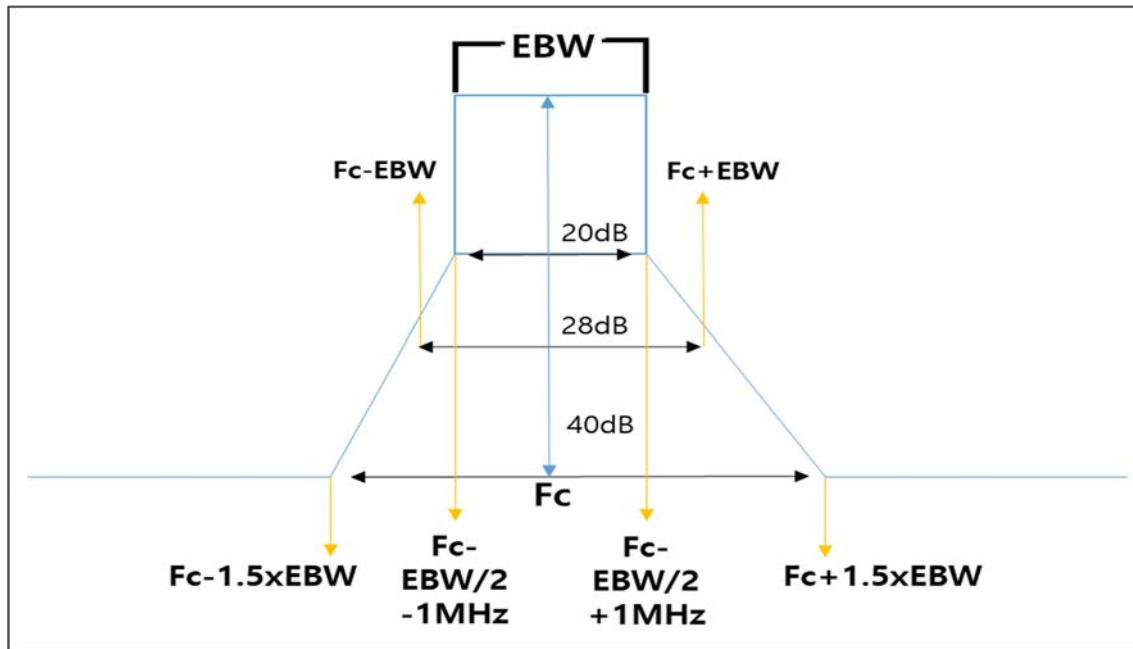

Generic Emission Mask

8.6. Contention Based Protocol

Test Configuration

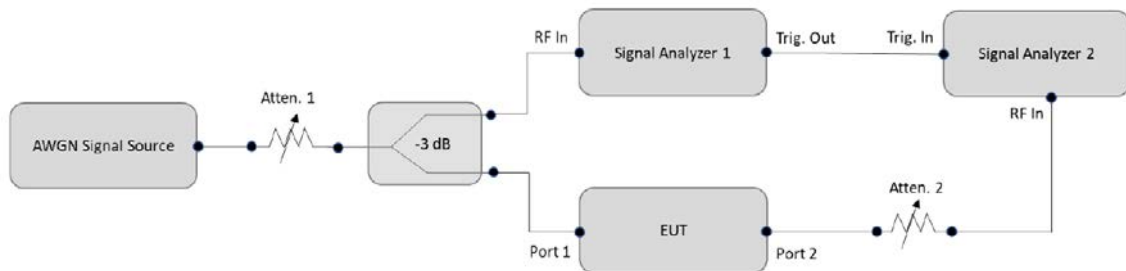

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Test Configuration. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Test Configuration.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

Sample Calculation

Incumbent signal Power(dBm) = Measured Value(dBm)

Modified Detection Limit(dBm) = Detection Limit(-62 dBm) + Antenna Gain(dBi)

8.7. Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP


Limit

The power is no more than 30 dBm EIRP.(Standart Power AP)

The power is no more than 24 dBm EIRP.(Low Power indoor AP)

Test Configuration

The EUT was connected to a standard power&Low Power indoor 6GHz access point (CMX 500).

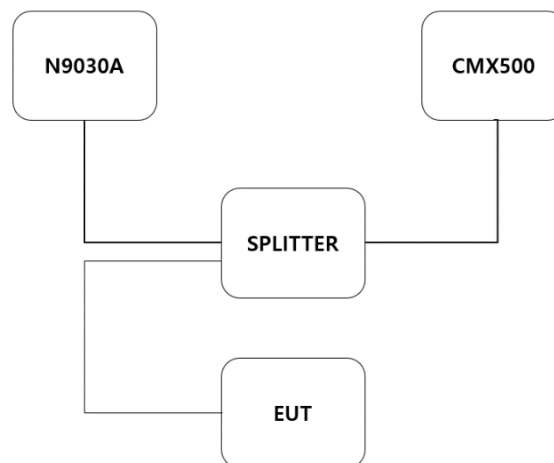

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Connect according to the test configuration.
2. Set up the client and AP (CMX500) to establish a connection and begin data transmission. It is important to configure the client to transmit at its maximum power level.
3. Verify the transmission between the client and the standard power AP (CMX500). Additional attenuators may be needed to protect the measurement equipment. Measure the client RF output using one of the methods in C63.10 for NII devices.
4. Simulate the client moving from outdoors to indoors. The client should connect to the low power indoor AP (CMX500). Verify the transmission between the client and the low power AP (CMX500).
5. Measure the RF output of the client device using the same method as in step 3. Verify that the output does not exceed 24 dBm EIRP.

Note

The test was executed with the emulator(CMX500) instead of the Std Power AP and Low Power AP.


8.8. Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point

Limit

The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.

Test Configuration

The EUT was connected to a standard-power access point(CMX 500).

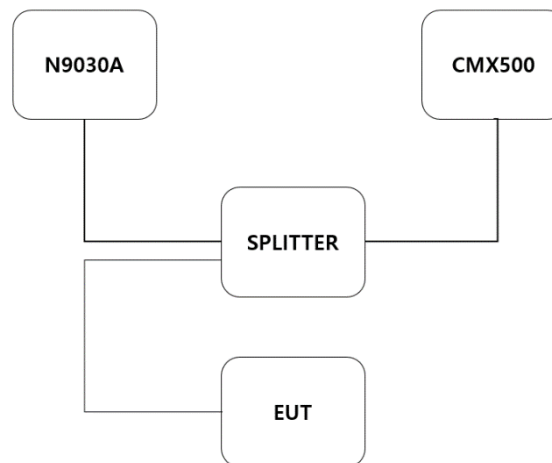

Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Connect equipment as shown in Test Configuration.
2. Adjust Atten to Std Power AP(CMX500) so as to facilitate error free communication with the Client but protect the Client receiver from overload or damage.
3. Configure the Client and AP(CMX500) so that they associate and start sending data (stream data). The AP(CMX500) should be configured such that its registered power is 36 dBm EIRP.
4. Verify transmission between Client and Std Power AP(CMX500). Additional attenuators may be required to protect measurement equipment. Measure the Client RF power using any of the methods in C63.10 for NII devices. Use this power, along with its antenna gain, to calculate the Client EIRP.
The Client EIRP should be minimally 6 dB lower than that of the AP(CMX500).
5. Repeat Steps 2 through 5 at two other selected measurement points – the first at the midpoint and the second at the lowest rated power of the client as declared by the manufacturer.

Note

The test was executed with the emulator(CMX500) instead of a standard-power access point.

Power measurement procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 12.3.2.7 in ANSI 63.10-2013.

1. Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
2. Set sweep trigger to "free run."
3. Set RBW = 1 MHz.
4. Set VBW $\geq 1 / T$, where T is defined in item a1) in 12.2.
5. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = peak.
8. Trace mode = max hold.
9. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.

Note

1. Both the dual client tests and the proper power adjustment tests used the same power measurement procedure.
2. The VBW $\geq 1/T$ value was calculated as follows: (On Time = 0.615 ms)
 $1/0.615 \text{ ms} = 3 \text{ kHz}$


8.9. Transmit Power Control, Very Low Power Devices

Limit

Very low-power devices operating in the 5.925–6.425 and 6.525–6.875 GHz bands shall employ a TPC mechanism. A very low-power device must demonstrate the capability to operate at least 6 dB below the maximum EIRP PSD value of -5 dBm/MHz.

Test Configuration

The EUT was connected to CMX 500.

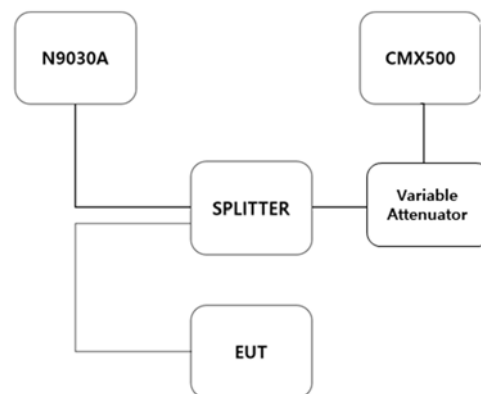

Test Procedure

We tested according to Procedure I in KDB 987594 D02

1. Set up according to the test configuration.
2. Connect the EUT to the CMX500 in VLP mode.
3. Set the variable attenuator to 10dB attenuation and maintain an environment free from external noise
4. Decrease variable attenuation and measure the spectral density (PSD) as high power RSSI. If the device supports MIMO operation, sum the power from all transmission ports.
5. Verify that the PSD power is $\leq -11\text{dBm/MHz}$.
6. Increase variable attenuation and measure the spectral density (PSD) as low power RSSI. If the device supports MIMO operation, sum the power from all transmission ports.
7. Verify that the PSD power is $\leq -5\text{dBm/MHz}$.

Measurement procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
 2. RBW = 1 MHz
 3. VBW $\geq$ 3 MHz
 4. Number of points in sweep $\geq$ 2 x span/RBW.
 5. Sweep time = auto.
 6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
 7. Do not use sweep triggering. Allow the sweep to “free run”.
 8. Trace average at least 100 traces in power averaging(RMS) mode
 9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
- If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

8.10. Radiated Test

Limit


1. For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

2. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

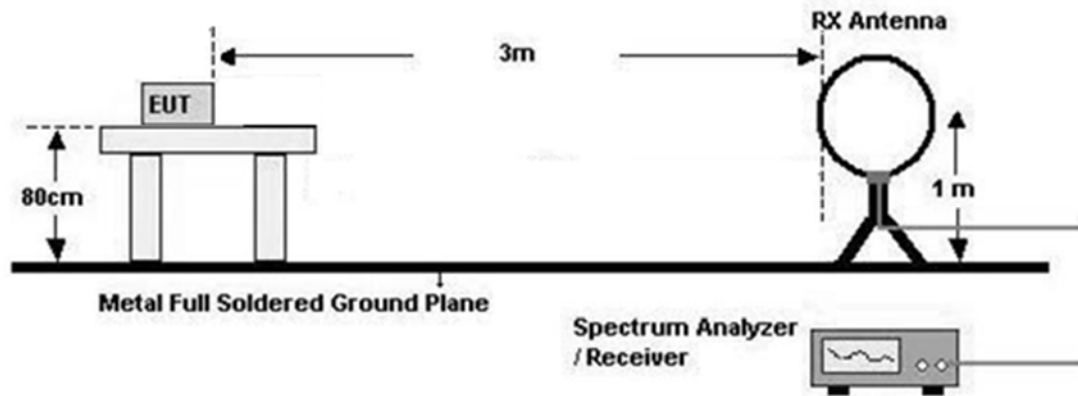

30 MHz - 1 GHz

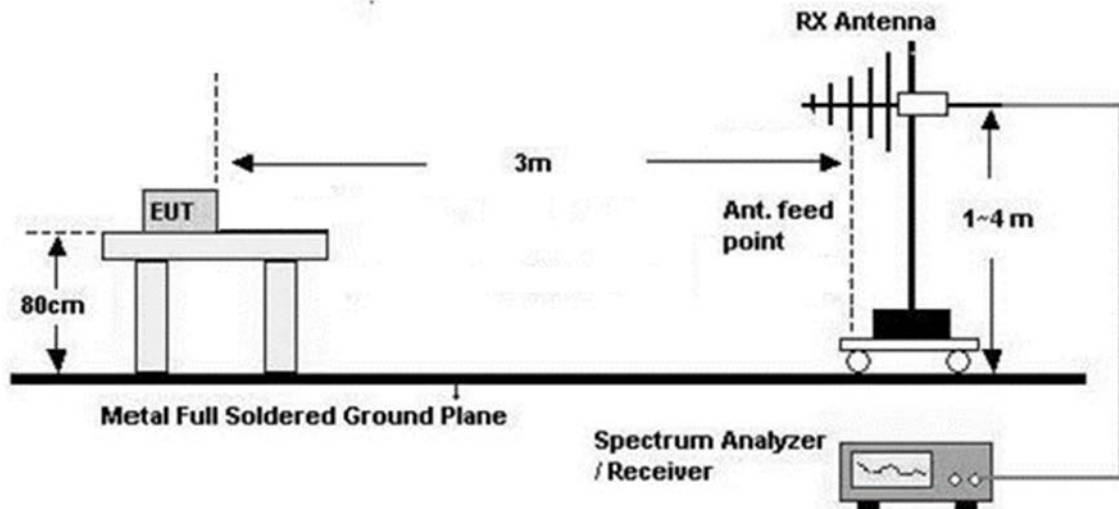

Above 1 GHz

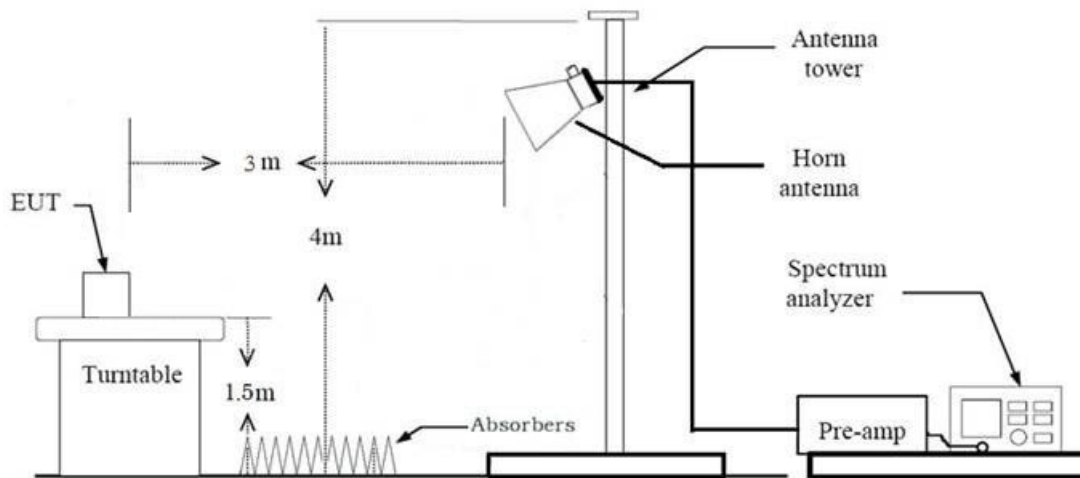

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Max Hold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW $\geq$ 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- Measured Frequency Range : 1 GHz – 40 GHz
- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle $\geq$ 98 %

- Measured Frequency Range : 1 GHz – 40 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq$ 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

(3) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 1 GHz – 40 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 10.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total(Measurement Type : Peak)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98 %)
- = Measured value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
- + Duty Cycle Factor(D.C.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep Time = auto
 - Trace mode = Max Hold
 - Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.
 - (2) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle $\geq 98\%$
 - Detector = RMS

- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

(3) Measurement Type(Average, G.6.c in KDB 789033 v02r01): Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Duty Cycle Factor (dB) : Please refer to the please refer to section 10.1.

9. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

10. Total(Measurement Type : Peak)

= Measured value

Total(Measurement Type : Average, Duty cycle ≥ 98 %)

= Measured value

Total(Measurement Type : Average, Duty cycle < 98 %)

= Measured value + Duty Cycle Factor(D.C.F)


- We apply to the offset in the range 1 GHz - 18 GHz.
- The offset = Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
 - Amp. Gain(A.G) + Attenuator (ATT)

8.11. Frequency Stability

Limit

Maintained within the band

Test Configuration

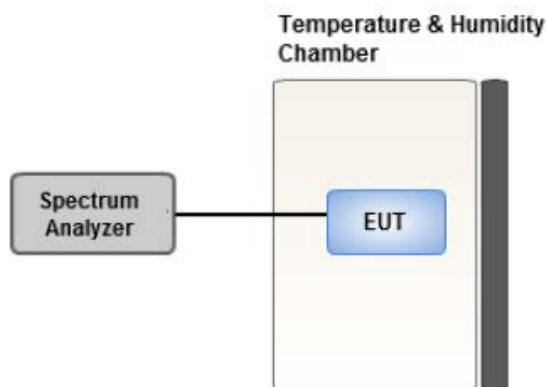

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.12. Test RU offset for Tones

[SRU]

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-
40	26	0~17	0	9	17
	52	37~44	37	41	44
	106	53~56	53	54	56
	242	61~62	61	-	62
	484	65	-	65	-
80	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
160	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
	2x996	68	-	68	-
320	26	0~36	0	19	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
	2x996	68	-	68	-
	4x996	69	-	69	-

[MRU]

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	52+26	70~72	70	71	72
	106+26	82~83	82	-	83
40	52+26	70~75	70	72	75
	106+26	82~85	82	83	85
80	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
160(80L/U)	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
160	996+484	94,95, 1094,1095	94	95	1095
	996+484+242	96~99 1096~1099	96	99	1099
320 (80LL/LM/MH/HH)	52+26	70~81	70	75	81
	106+26	82~89	82	85	89
	484+242	90~93	90	91	93
320(160U/L)	996+484	94,95, 1094,1095	94	95	1095
320	3x996	104,1104, 10104,11104	104,	1104	11104
	2x996+484	100,101,1101, 101012,11102,11103	100	1101	11103
	3x996+484	105,106,1106 10105,11105,11106	105	1106	11106

8.13. Worst case configuration and mode

Conducted test

1. All data rate of operation were investigated and the worst case results are reported.
 - EHT20 : MCS 0
 - EHT40 : MCS 0
 - EHT80 : MCS 0
 - EHT160 : MCS 0
 - EHT320 : MCS 0
 - 802.11 a : 6 Mbps
2. We performed all tests for both 802.11ax and 802.11be, and to simplify the report, we have included only the 802.11be data.
3. All MRU and channel puncturing combinations were investigated, and the results for each combination were the same. Therefore, only the results for MRU are attached.
4. The combination that only supports channel puncturing is 996+484+242, and the results for this combination have been attached.
5. SM-S931B/DS, SM-S931B were tested and the worst case results are reported.
(Worst case: SM-S931B/DS)

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the worst case results are reported.
(Worst case : MCS0)
4. All Antenna of operation were investigated and the worst case results are reported
 - Mode : SISO, MIMO_CDD(Ant.1+Ant.2), MIMO_SDM(Ant.1+Ant.2)
 - Worstcase : MIMO_CDD(Ant.1+Ant.2)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. We performed all tests for both 802.11ax and 802.11be, and to simplify the report, we have included only the 802.11be data.
7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported
8. SM-S931B/DS, SM-S931B were tested and the worst case results are reported.
(Worst case: SM-S931B/DS)

[RSE Worst case]

Standard Client:	UNII 5, 7
Indoor Client	UNII 6, 8

Test		BW (MHz)	Tones (T)	Offset
RSE (Standard Client)	SRU	20	26	4
			242	61
		40	26	9
			484	65
		80	26	19
			996	67
		160	26 (160(80L))	19
			2x996T	68
		320	26 (320(80LL))	19
			4x996	69
	MRU	20	52+26	71
			106+26	82
		40	52+26	72
			106+26	83
		80	52+26	75
			484+242 (OFDMA)	91
		160	52+26 (160(80L))	75
			996+484+242 (Non-OFDMA)	99
		320	52+26 (320(80LL))	75
			996*3+484 (OFDMA)	1106
RSE (Indoor Client)	SRU	20	242	61
		40	484	65
		80	996	67
		160	2x996T	68
		320	26 (320(80LL))	19

[Bandedge Worst case]

Standard Client:	UNII 5
Indoor Client	UNII 8

Test		BW (MHz)	Tones (T)	Offset	
				Lower	Upper
Bandedge	SRU	20	26	0	8
			52	37	40
			106	53	54
			242	61	61
			SU	-	-
		40	26	0	17
			52	37	44
			106	53	56
			242	61	62
			484	65	65
			SU	-	-
		80	26	0	36
			52	37	52
			106	53	60
			242	61	64
			484	65	66
			996	67	67
			SU	-	-
		160(80L)	26	0	-
			52	37	-
			106	53	-
			242	61	-
			484	65	-
		160(80U)	996	67	-
			2x996	68	-
			SU	-	-
			26	-	36
			52	-	52
			106	-	60
			242	-	64
			484	-	66
			996	-	67
			2x996	-	68
			SU	-	-
		320(80LL)	26	0	-
			52	37	-
			106	53	-
			242	61	-
			484	65	-
		320(80HH)	996	67	-
			26	-	36
			52	-	52
			106	-	60
			242	-	64
			484	-	66
			996	-	67
		320(160L)	2x996	68	-
		320(160U)	2x996	-	68
		320	4x996	69	69
			SU	-	-

Test		BW (MHz)	Tones (T)	Offset	
				Lower	Upper
Bandedge	MRU	20	52+26	70	72
			106+26	82	83
		40	52+26	70	75
			106+26	82	85
		80	52+26	70	81
			106+26	82	89
			484+242 (OFDMA)	93	90
		160(80L)	52+26	70	-
			106+26	82	-
			484+242	93	-
		160(80U)	52+26	-	81
			106+26	-	89
			484+242	-	90
		160	996+484 (OFDMA)	1095	94
			996+484+242 (Non-OFDMA)	1099	96
		320(80LL)	52+26	70	-
			106+26	82	-
			484+242	93	-
		320(80HH)	52+26	-	81
			106+26	-	89
			484+242	-	90
		320(160L)	996+484	1095	-
		320(160U)	996+484	-	94
		320	2x996+484 (OFDMA)	1101	10102
			3x996	11104	104
			3x996+484 (OFDMA)	11106	105

Radiated test(RSDB)

- Please refer to the [DTS], [BT], [UNII ax, be] Test Report.
- SM-S931B/DS, SM-S931B were tested and the worst case results are reported.
(Worst case: SM-S931B/DS)

AC Power line Conducted Emissions

- All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, Keyboard etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
- SM-S931B/DS, SM-S931B were tested and the worst case results are reported.
(Worst case: SM-S931B/DS)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
Maximum transmitter channel bandwidth	§ 15.407(a)(11)	< 320 MHz	Conducted	PASS (Note ^{2,3})
Output Power Maximum EIRP	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	<u>U-NII-5(5925-6425 MHz) & U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) EIRP < 36 dBm Client(Connected to standard-Power Access Point) EIRP < 30 dBm Very low power devices EIRP < 14 dBm <u>U-NII-5(5925-6425 MHz) & U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) & U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) EIRP < 30 dBm Client (Connected to Low-Power Access Point) EIRP < 24 dBm		PASS
Output Power Maximum EIRP Power Spectral Density	§ 15.407(a)(7) § 15.407(a)(8) § 15.407(a)(9)	<u>U-NII-5(5925-6425 MHz) & U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) < 33 dBm/MHz (EIRP) Client(Connected to standard-Power Access Point) < 17 dBm/MHz (EIRP) Very low power devices < -5 dBm/MHz (EIRP) <u>U-NII-5(5925-6425 MHz) & U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) & U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) < 5 dBm/MHz (EIRP) Client (Connected to Low-Power Access Point) < -1 dBm/MHz (EIRP)		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.407 (b)(9)	<FCC 15.207 limits		PASS
Contention Based Protocol	§ 15.407(d)(6)	Detect co-channel energy with 90% or greater certainty.		PASS (Note ¹)
Frequency Stability	§ 15.407(g) § 2.1055	Maintained within the band		PASS
Proper Power Adjustment, Client Devices Connected to a Standard Power Access Point	§ 15.407(a)(7)	The maximum power limits shall remain at least 6 dB below the power levels authorized for the associated standard-power access point.		PASS
Dual Client Test, Demonstration of Proper Power Adjustment based on Associated AP	§ 15.407(a)(7) § 15.407(a)(8)	EIRP < 30 dBm (Standard Power) EIRP < 24 dBm (Low Power Indoor)		PASS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
TPC mechanism (VLP Device)	§ 15.407(d)(10)	EIRP PSD < -5 dBm/MHz (at least 6 dB below the maximum EIRP PSD)	Radiated	PASS
In-Band Emissions (Emissions Mask)	§ 15.407(b)(7)	a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.) b. Suppressed by 28 dB at one channel bandwidth from the channel center. c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.		PASS
Undesirable Emissions	§ 15.407(b) § 15.35(b)	<-27 dBm/MHz EIRP (UNII5, 6, 7, 8)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

Note:

1. Bandwidth Reduction was used for incumbent avoidance.
2. FCC allows 99% bandwidth measurements for 320MHz BW mode.
Therefore, 99% bandwidth was used to demonstrate compliance for channels with a nominal bandwidth of 320 MHz (not less).
3. For channels with a nominal bandwidth less than 320MHz, compliance is demonstrated by way of the 26 dB bandwidth. For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99% bandwidth.

10. TEST RESULT

10.1 DUTY CYCLE

Note: Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$. where, Duty Cycle = $T_{\text{on}} / T_{\text{total}}$

10.1.1 802.11 be SRU Duty Cycle

Mode	Tones	Data Rate (Mbps)	T_{on} (ms)	T_{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11be (EHT20)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.570	4.590	0.996	0.019
	106	MCS0	2.493	2.508	0.994	0.026
	242	MCS0	1.124	1.140	0.986	0.063
802.11be (EHT40)	26	MCS0	4.575	4.595	0.996	0.019
	52	MCS0	4.565	4.586	0.995	0.020
	106	MCS0	2.492	2.509	0.993	0.029
	242	MCS0	1.122	1.139	0.986	0.063
	484	MCS0	0.607	0.625	0.972	0.124
802.11be (EHT80)	26	MCS0	4.580	4.595	0.997	0.014
	52	MCS0	4.570	4.585	0.997	0.014
	106	MCS0	2.489	2.506	0.993	0.029
	242	MCS0	1.121	1.139	0.984	0.068
	484	MCS0	0.608	0.625	0.973	0.118
	996	MCS0	0.600	0.617	0.973	0.120
802.11be (EHT160_80L)	26	MCS0	4.580	4.595	0.997	0.014
	52	MCS0	4.565	4.583	0.996	0.017
	106	MCS0	2.492	2.509	0.993	0.029
	242	MCS0	1.121	1.139	0.984	0.068
	484	MCS0	0.608	0.625	0.973	0.118
	996	MCS0	0.600	0.617	0.973	0.120
802.11be(EHT160)	2x996	MCS0	0.598	0.615	0.973	0.121
802.11be (EHT320_80LM)	26	MCS0	4.576	4.594	0.996	0.017
	52	MCS0	4.565	4.585	0.996	0.019
	106	MCS0	2.489	2.509	0.992	0.034
	242	MCS0	1.121	1.140	0.984	0.072
	484	MCS0	0.609	0.625	0.974	0.113
	996	MCS0	0.600	0.617	0.973	0.120
802.11be(EHT320_160L)	2x996	MCS0	0.598	0.615	0.973	0.121
802.11be(EHT320)	4x996	MCS0	0.368	0.386	0.953	0.207
802.11be SU	BW20	MCS0	5.452	5.473	0.996	0.017
	BW40	MCS0	5.457	5.472	0.997	0.012
	BW80	MCS0	5.457	5.472	0.997	0.012
	BW160	MCS0	5.457	5.472	0.997	0.012
	BW320	MCS0	5.462	5.477	0.997	0.012

10.1.2 802.11 a Duty Cycle

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6 Mbps	1.467	1.563	0.939	0.275

10.1.3 802.11 be MRU Duty Cycle


Mode	Tones	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11be(EHT20)	52+26	MCS0	3.503	3.520	0.995	0.021
	106+26	MCS0	2.029	2.047	0.991	0.038
802.11be(EHT40)	52+26	MCS0	3.499	3.520	0.994	0.026
	106+26	MCS0	2.028	2.046	0.991	0.040
802.11be(EHT80)	52+26	MCS0	3.503	3.521	0.995	0.022
	106+26	MCS0	2.031	2.048	0.992	0.036
	484+242	MCS0	0.813	0.830	0.980	0.090
802.11be(EHT160_80L)	52+26	MCS0	3.503	3.520	0.995	0.021
	106+26	MCS0	2.028	2.046	0.991	0.040
	484+242	MCS0	0.814	0.831	0.980	0.090
802.11be(EHT160)	996+484	MCS0	0.785	0.801	0.980	0.088
	996+484+242	MCS0	5.456	5.471	0.997	0.012
802.11be(EHT320_80LM)	52+26	MCS0	3.503	3.521	0.995	0.022
	106+26	MCS0	2.029	2.046	0.992	0.036
	484+242	MCS0	0.814	0.831	0.980	0.090
802.11be(EHT160_160L)	996+484	MCS0	0.785	0.802	0.979	0.093
EHT320	3x996	MCS0	0.421	0.438	0.962	0.167
	2x996+484	MCS0	0.493	0.510	0.967	0.145
	3x996+484	MCS0	0.370	0.386	0.958	0.188

Test Plots


Note: In order to simplify the report, attached plots were only the lowest datarate.

[SRU]


802.11be EHT 20 Ch.2(5935 MHz) 26 Tones MCS0

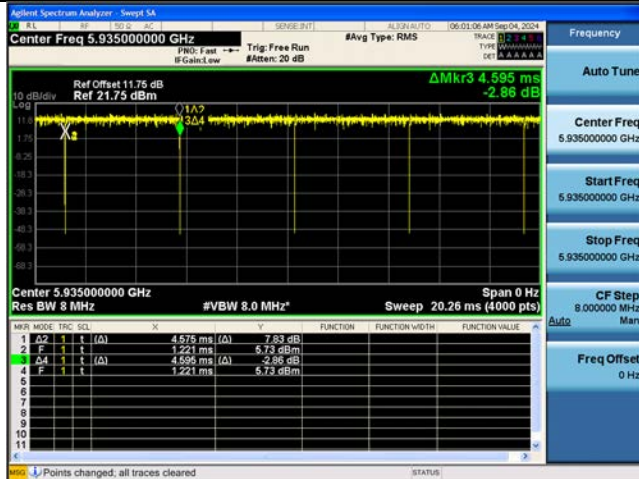


802.11be EHT 20 Ch.2(5935 MHz) SU MCS0

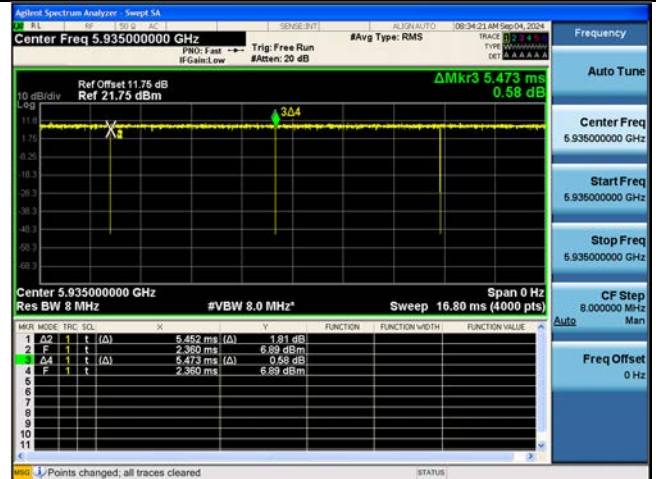


802.11be EHT 40 Ch.3(5965 MHz) 26 Tones MCS0

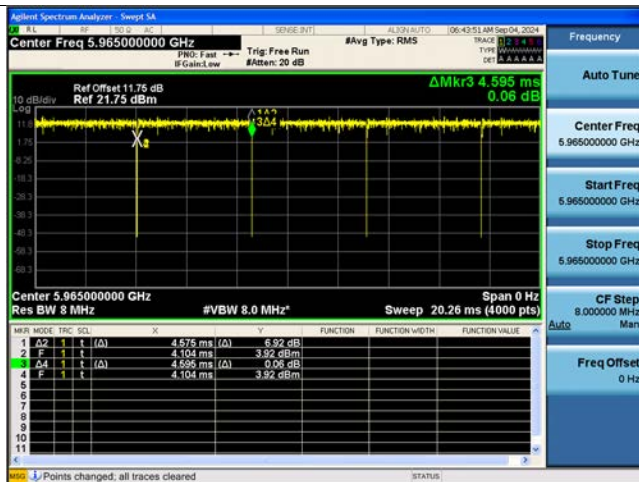


802.11be EHT 40 Ch.3(5965 MHz) SU MCS0

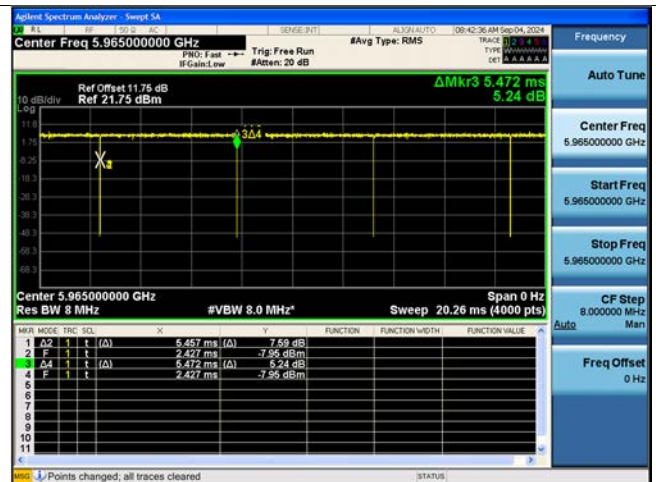


802.11be EHT 80 Ch.7(5985 MHz) 26 Tones MCS0

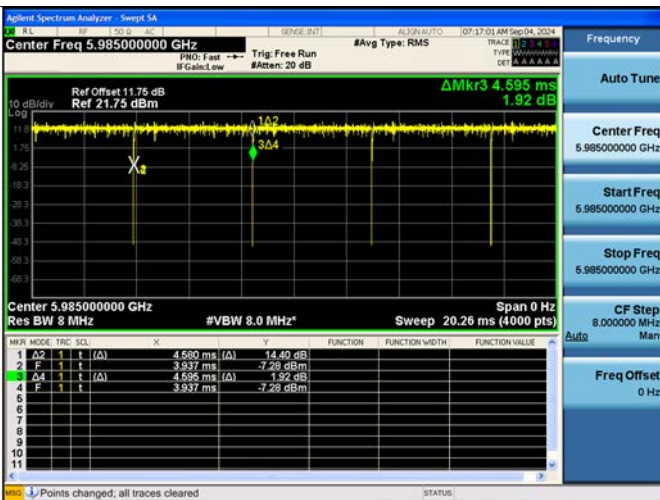


802.11be EHT 80 Ch.7(5985 MHz) SU MCS0

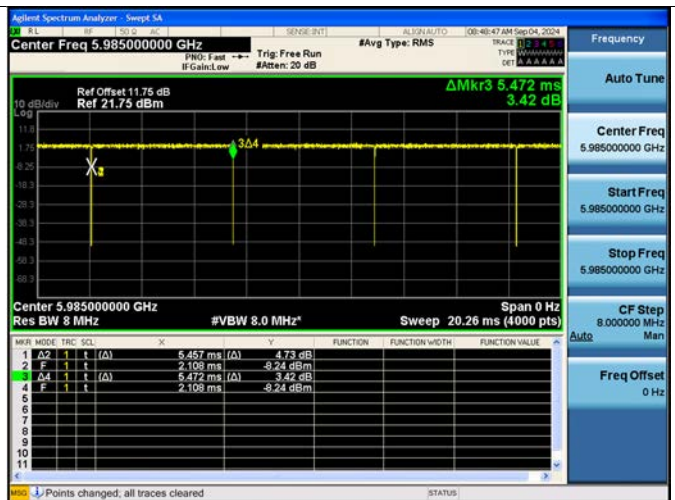


802.11be EHT 160 Ch.15(6025 MHz) 26 Tones MCS0

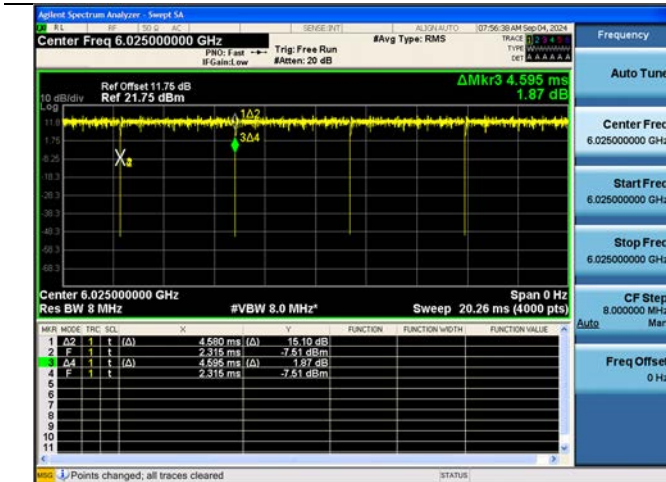


802.11be EHT 160 Ch.15(6025 MHz) 2x996T MCS0

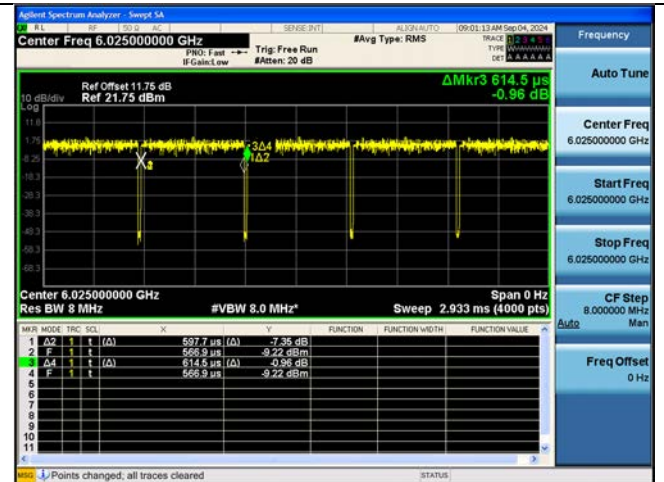


802.11be EHT 160 Ch.15(6025 MHz) SU MCS0

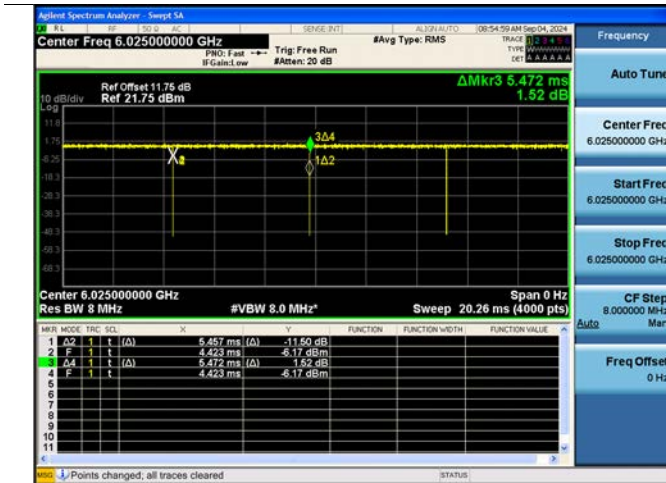


802.11be EHT 320 Ch.127(6585 MHz) 26 Tones MCS0

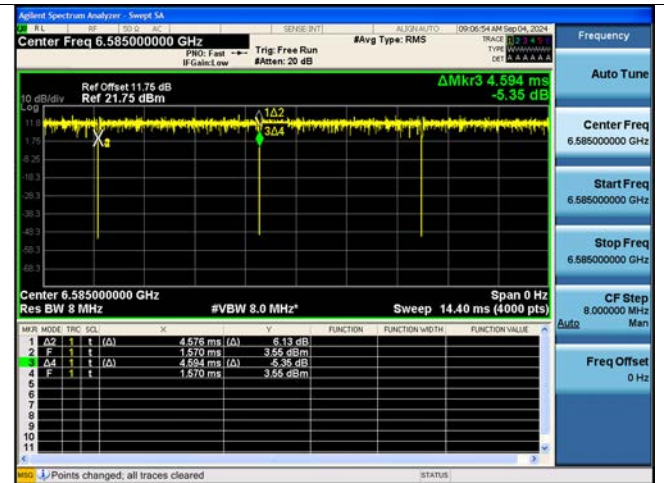

802.11be EHT 320 Ch.127(6585 MHz) 2x996T MCS0


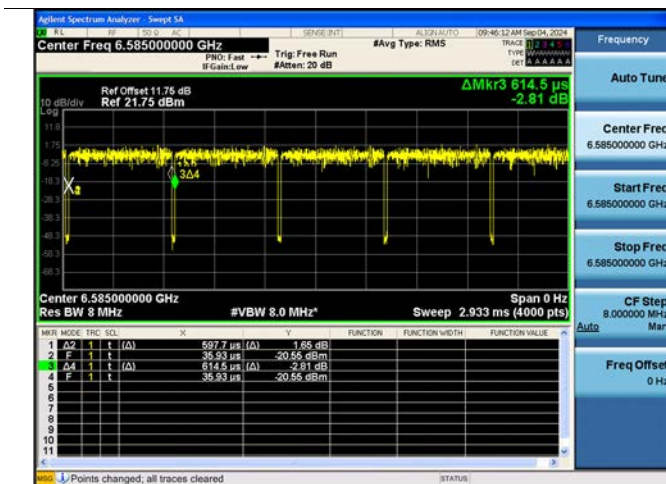


802.11be EHT 320 Ch.31(6105 MHz) 4x996T MCS0

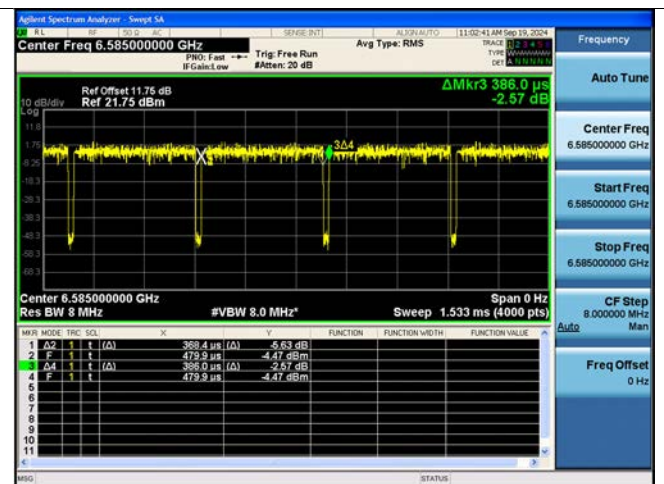

802.11be EHT 320 Ch.127(6585 MHz) SU



802.11a Ch.2(5935 MHz) 6 Mbps

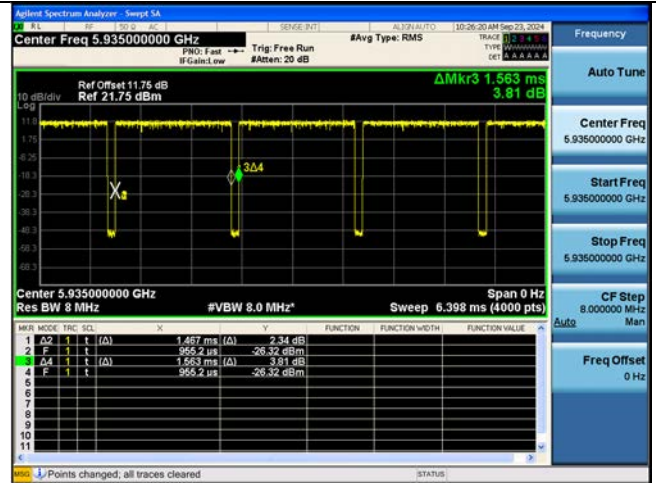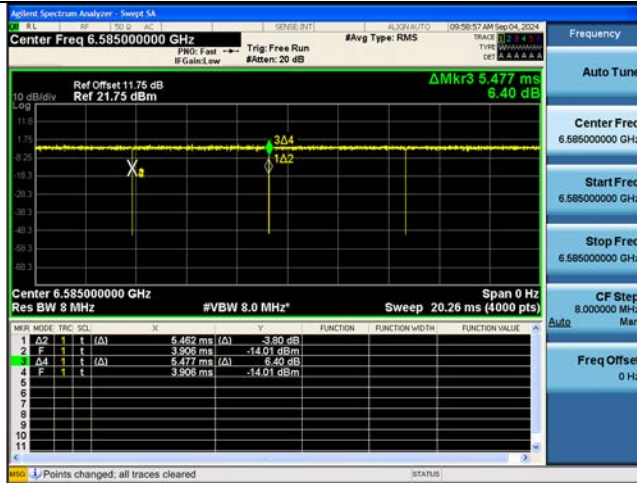

[MRU]



802.11be EHT 20 Ch.2(5935 MHz) 52T + 26T

802.11be EHT 20 Ch.2(5935 MHz) 106T + 26T

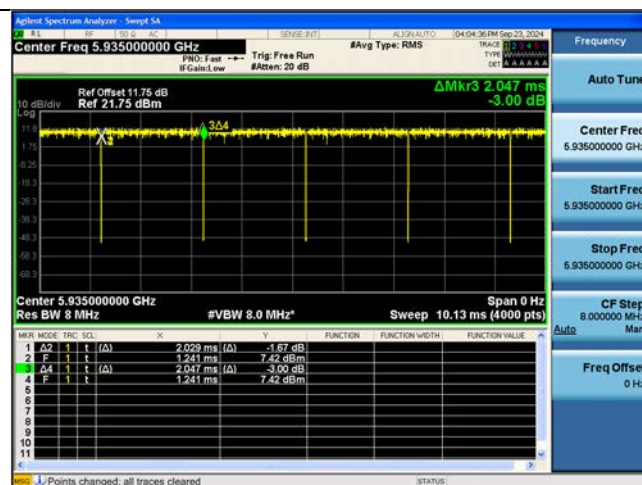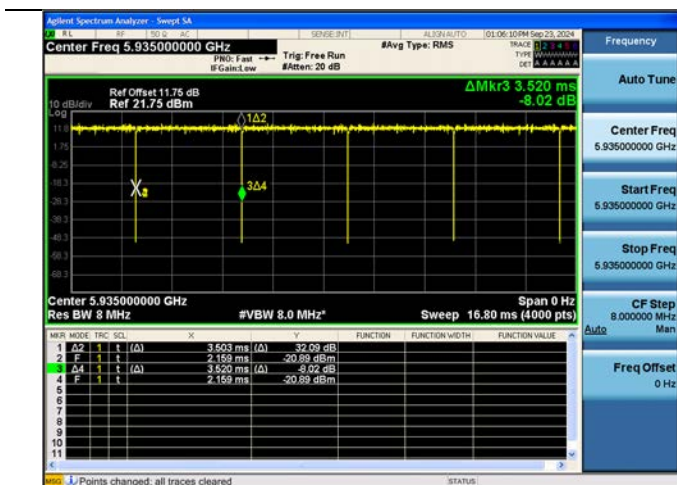



802.11be EHT 40 Ch.3(5965 MHz) 52T + 26T

802.11be EHT 40 Ch.3(5965 MHz) 106T + 26T

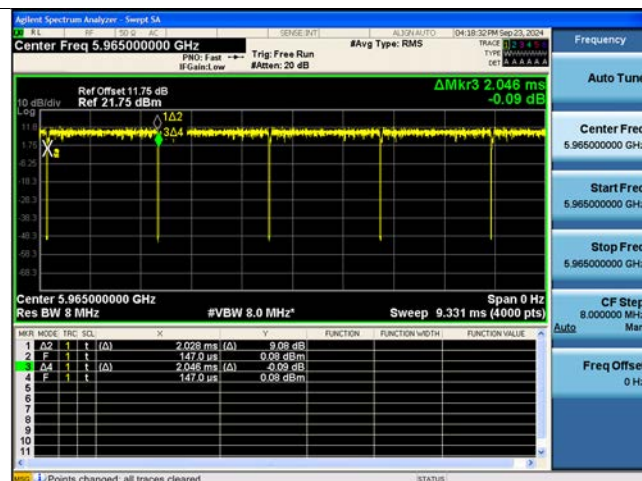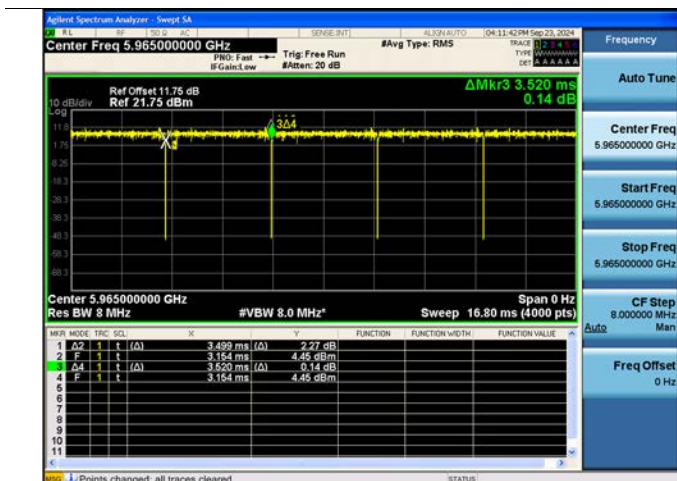


802.11be EHT 80 Ch.7(5985 MHz) 52T + 26T


802.11be EHT 80 Ch.7(5985 MHz) 106T + 26T

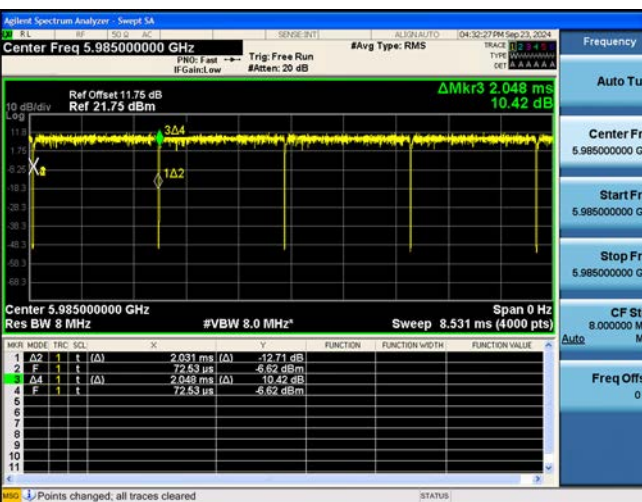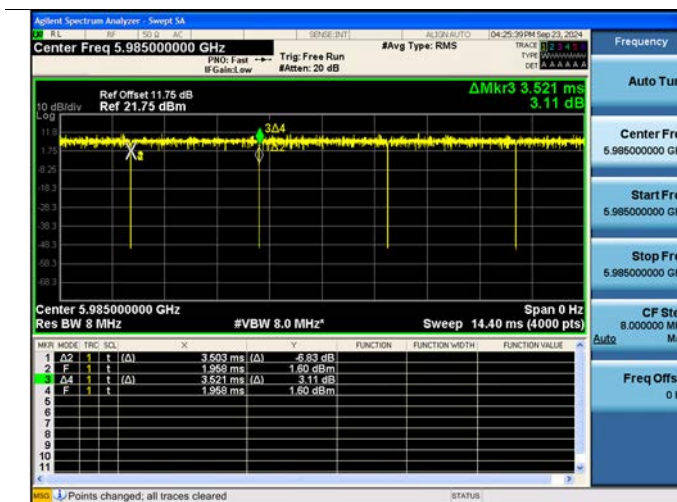


802.11be EHT 80 Ch.7(5985 MHz) 484T + 242T

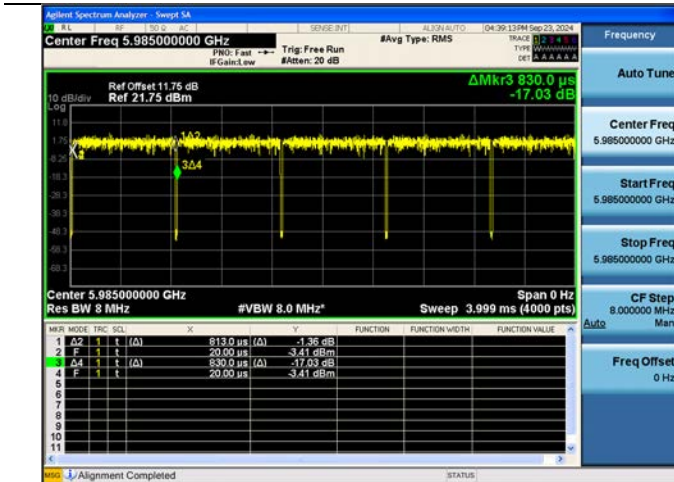


802.11be EHT 160 Ch.15(6025MHz) 52T + 26T

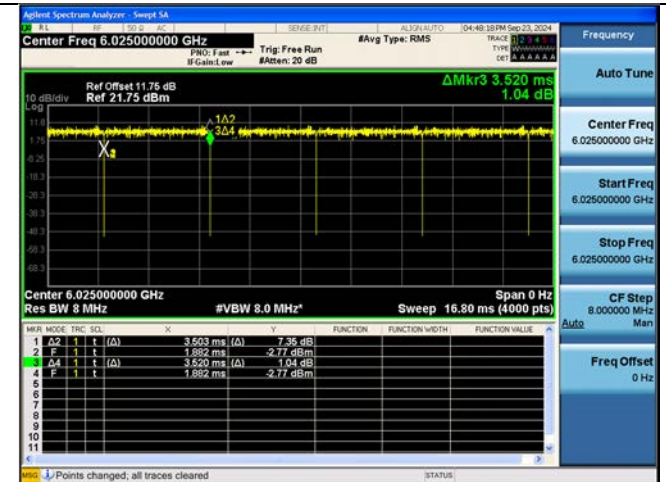


802.11be EHT 160 Ch.15(6025MHz) 106T + 26T

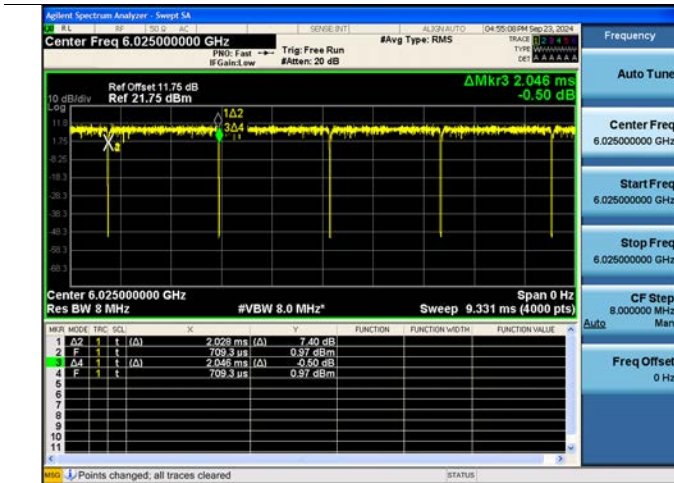


802.11be EHT 160 Ch.15(6025MHz) 484T + 242T

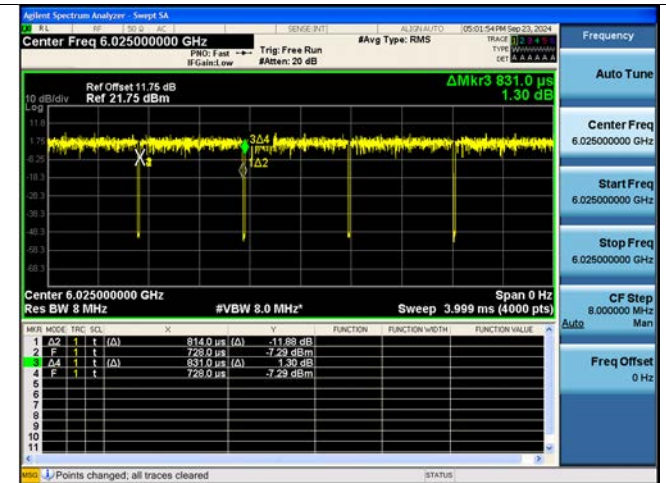

802.11be EHT 160 Ch.15(6025MHz) 996T + 484T


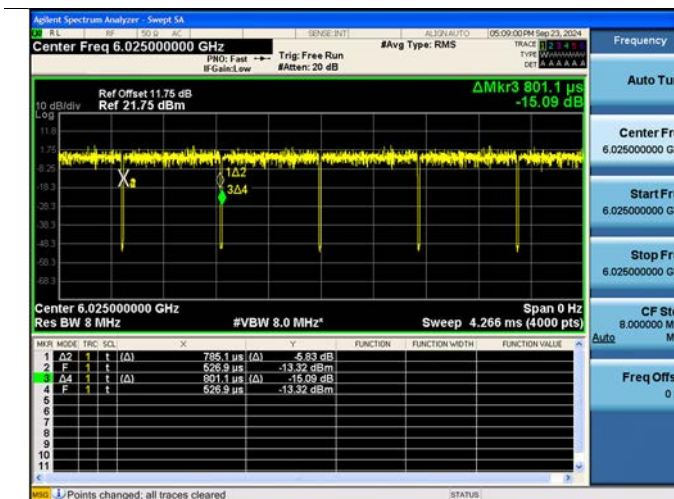


802.11be EHT 160 Ch.15(6025MHz) 996T + 484T + 242T

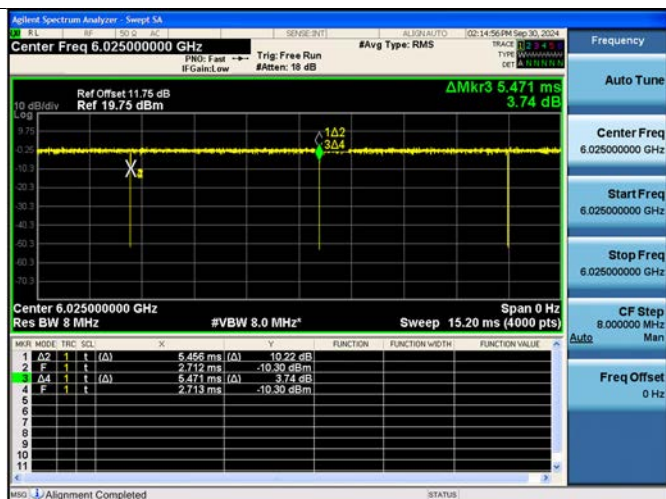



802.11be EHT 320 Ch.31(6105MHz) 52T + 26T

802.11be EHT 320 Ch.31(6105MHz) 106T + 26T

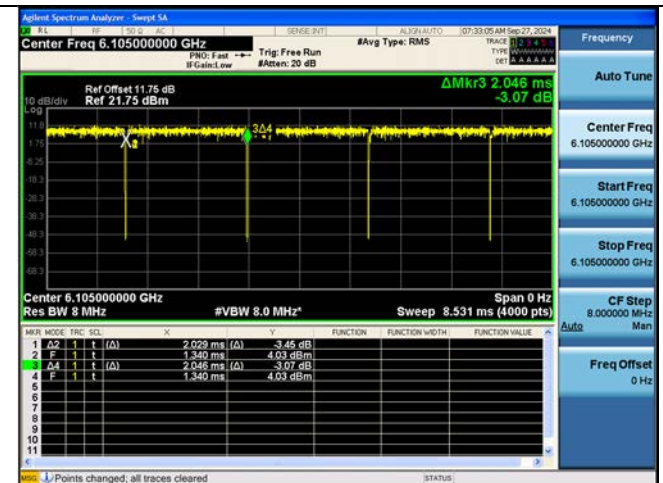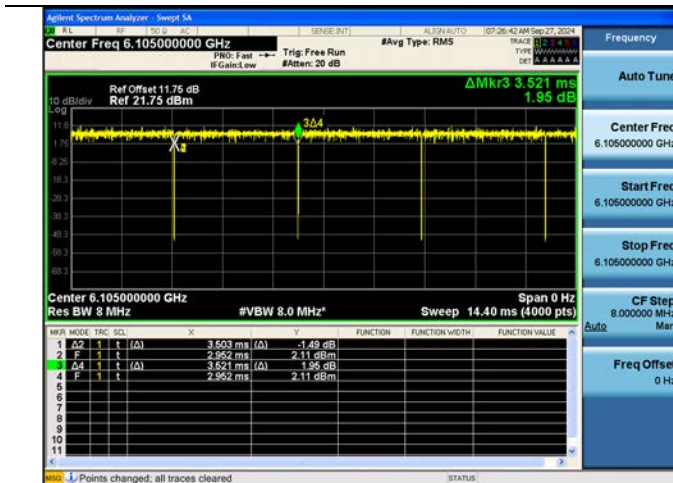



802.11be EHT 320 Ch.31(6105MHz) 484T + 242T

802.11be EHT 320 Ch.31(6105MHz) 996T + 484T

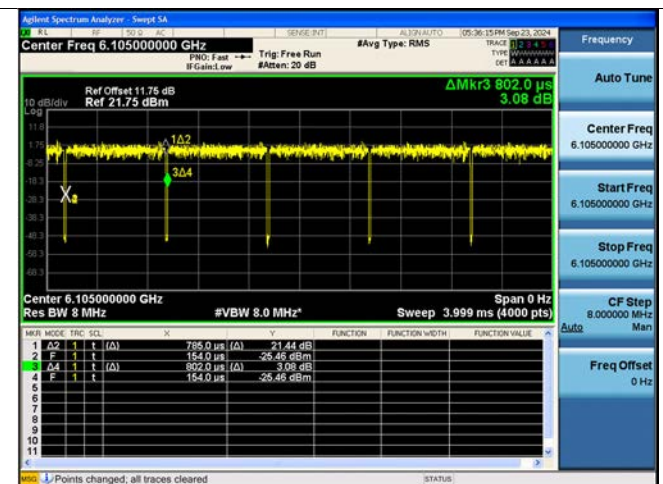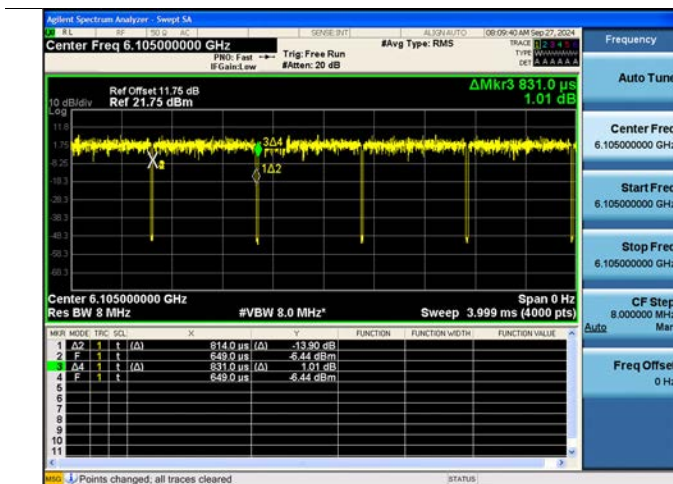


802.11be EHT 320 Ch.31(6105MHz) 3x996T

802.11be EHT 320 Ch.31(6105MHz) 2x996T + 484T

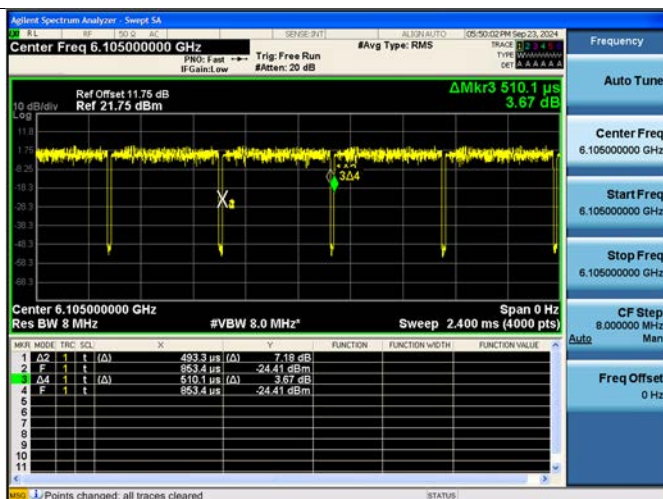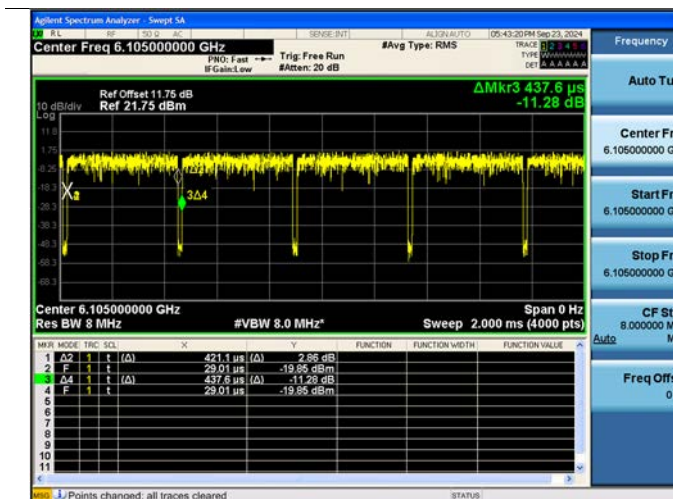

802.11be EHT 320 Ch.31(6105MHz) 3x996T + 484T

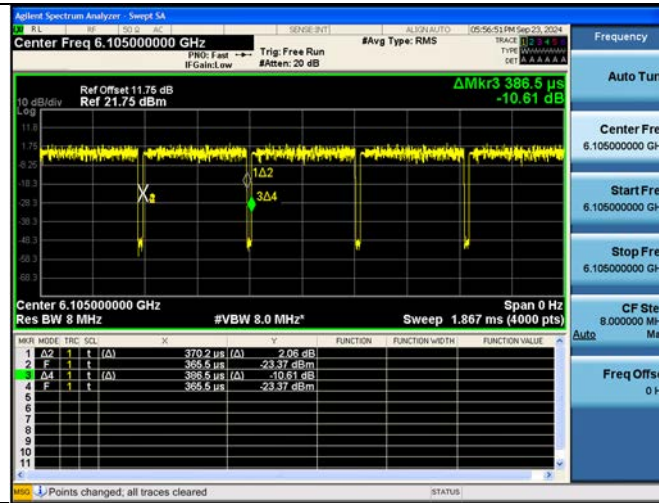

10.2 26 dB BANDWIDTH & 99 % Occupied BANDWIDTH

10.2.1 26 dB BANDWIDTH(Indoor client)

10.2.1.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.48	18.05	19.51	18.253	16.620	18.227
	6175	45	19.27	17.92	19.51	18.006	16.622	18.127
	6415	93	19.35	17.98	19.56	18.221	17.056	18.210
UNII6	6435	97	19.43	18.03	19.54	18.096	16.659	18.229
	6475	105	19.36	17.91	19.39	18.212	16.869	18.141
	6515	113	19.49	17.87	19.57	17.736	16.971	18.210
UNII7	6535	117	19.22	18.00	19.64	17.821	16.933	18.269
	6695	149	18.99	18.01	19.43	17.713	16.223	18.118
	6855	181	19.38	17.91	19.50	18.106	16.768	18.243
UNII8	6875	185	19.40	18.00	19.59	18.102	16.966	18.287
	6995	209	19.41	17.93	19.64	18.180	16.533	18.212
	7115	233	19.38	18.02	19.49	17.937	16.650	18.201

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.72	18.19	19.65	18.140	17.026	18.193
	6175	45	19.48	18.58	19.75	18.131	16.915	18.008
	6415	93	19.65	18.30	19.61	18.141	17.012	18.043
UNII6	6435	97	19.63	18.16	19.52	18.192	17.089	18.125
	6475	105	19.69	18.62	19.46	18.108	16.800	18.094
	6515	113	19.70	18.14	19.82	17.289	17.164	18.092
UNII7	6535	117	19.60	18.62	19.55	18.150	16.756	18.134
	6695	149	19.63	18.38	19.78	18.106	16.790	18.078
	6855	181	19.69	18.45	19.69	18.049	17.069	18.172
UNII8	6875	185	19.70	18.11	19.62	18.135	17.054	18.051
	6995	209	19.45	18.64	19.51	18.012	16.856	17.956
	7115	233	19.49	18.47	19.80	17.857	17.059	17.904

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.64	-	20.12	18.082	-	18.123
	6175	45	19.60	-	20.07	18.051	-	18.156
	6415	93	19.66	-	20.28	18.194	-	18.133
UNII6	6435	97	19.61	-	20.06	18.166	-	18.085
	6475	105	19.56	-	20.08	18.069	-	18.142
	6515	113	19.48	-	20.22	18.163	-	18.234
UNII7	6535	117	19.60	-	20.18	18.034	-	18.071
	6695	149	19.60	-	19.86	18.193	-	18.144
	6855	181	19.59	-	19.99	18.098	-	18.173
UNII8	6875	185	19.64	-	20.22	18.177	-	18.092
	6995	209	19.52	-	20.37	18.176	-	18.186
	7115	233	19.64	-	20.15	18.187	-	18.193

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.02	-	-	19.013	-
	6175	45	-	21.01	-	-	19.025	-
	6415	93	-	21.04	-	-	19.030	-
UNII6	6435	97	-	20.96	-	-	19.018	-
	6475	105	-	20.89	-	-	19.018	-
	6515	113	-	21.07	-	-	19.037	-
UNII7	6535	117	-	20.85	-	-	19.015	-
	6695	149	-	20.97	-	-	19.029	-
	6855	181	-	21.02	-	-	19.031	-
UNII8	6875	185	-	21.05	-	-	19.035	-
	6995	209	-	21.00	-	-	19.044	-
	7115	233	-	21.04	-	-	19.038	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.40	-	-	19.025	-
	6175	45	-	21.56	-	-	19.017	-
	6415	93	-	21.39	-	-	19.034	-
UNII6	6435	97	-	21.37	-	-	19.015	-
	6475	105	-	21.51	-	-	19.043	-
	6515	113	-	21.24	-	-	19.042	-
UNII7	6535	117	-	21.39	-	-	19.015	-
	6695	149	-	21.32	-	-	18.996	-
	6855	181	-	21.27	-	-	19.017	-
UNII8	6875	185	-	21.61	-	-	19.064	-
	6995	209	-	21.53	-	-	19.034	-
	7115	233	-	21.61	-	-	19.028	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	19.90	21.96	20.14	18.301	20.342	18.328
	6165	43	19.42	22.19	20.23	17.844	19.952	18.575
	6405	91	20.48	22.22	21.03	18.492	20.138	18.388
UNII6	6445	99	20.53	21.85	20.64	18.452	20.123	18.323
	6485	107	19.88	21.71	20.86	18.430	19.975	18.473
	6525	115	18.84	21.91	20.58	15.220	20.114	18.710
UNII7	6565	123	19.64	21.36	20.10	18.237	20.192	18.398
	6685	147	20.03	22.20	20.56	18.119	20.096	18.082
	6845	179	19.93	22.42	20.09	18.449	20.125	18.446
UNII8	6885	187	19.95	21.94	20.36	18.373	19.161	18.334
	7005	211	18.80	22.15	21.38	17.376	20.046	18.658
	7085	227	20.01	21.64	20.18	18.233	20.005	18.434

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	19.45	22.83	24.18	17.815	19.637	18.360
	6165	43	20.49	21.39	20.43	18.257	18.349	18.263
	6405	91	20.65	22.77	22.76	18.198	19.868	18.389
UNII6	6445	99	20.95	22.91	25.49	18.300	19.830	18.331
	6485	107	20.20	22.23	21.81	18.259	19.594	18.392
	6525	115	20.80	22.89	23.90	18.314	19.763	18.318
UNII7	6565	123	20.90	22.63	20.81	18.189	19.832	18.248
	6685	147	20.61	22.88	21.51	18.225	19.787	18.409
	6845	179	20.91	23.25	25.19	18.275	19.650	18.377
UNII8	6885	187	20.58	23.12	25.79	18.251	19.978	18.313
	7005	211	20.21	22.82	20.85	18.092	19.924	17.788
	7085	227	20.26	22.83	23.80	18.246	19.827	18.477

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	21.66	30.89	26.01	18.106	19.486	18.103
	6165	43	23.14	30.12	25.36	18.072	19.413	18.129
	6405	91	31.32	23.61	27.63	18.029	19.237	18.286
UNII6	6445	99	30.02	30.16	26.34	18.113	19.247	18.162
	6485	107	31.33	24.74	27.54	18.113	19.523	18.195
	6525	115	21.94	23.35	27.50	18.040	19.297	18.181
UNII7	6565	123	31.17	30.23	24.78	18.007	19.305	18.200
	6685	147	31.35	23.35	26.38	17.926	19.221	18.196
	6845	179	21.64	22.98	26.44	18.051	19.219	18.213
UNII8	6885	187	21.96	30.25	26.42	18.065	19.301	18.200
	7005	211	21.93	23.81	26.03	18.011	19.318	18.240
	7085	227	21.60	24.04	27.69	17.996	19.416	18.396

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	34.92	-	35.68	19.440	-	19.773
	6165	43	34.78	-	35.74	19.457	-	19.682
	6405	91	34.89	-	35.85	19.426	-	19.866
UNII6	6445	99	34.84	-	36.06	19.481	-	19.793
	6485	107	35.25	-	35.47	19.479	-	19.814
	6525	115	35.06	-	36.52	19.420	-	20.110
UNII7	6565	123	34.80	-	35.81	19.431	-	19.835
	6685	147	35.00	-	35.81	19.388	-	19.862
	6845	179	34.79	-	35.94	19.410	-	20.127
UNII8	6885	187	34.92	-	36.06	19.425	-	19.902
	7005	211	34.61	-	36.11	19.404	-	19.768
	7085	227	35.46	-	35.97	19.369	-	20.121

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.57	-	-	37.933	-
	6165	43	-	41.52	-	-	37.975	-
	6405	91	-	41.63	-	-	37.954	-
UNII6	6445	99	-	41.47	-	-	38.000	-
	6485	107	-	41.64	-	-	37.988	-
	6525	115	-	41.65	-	-	37.994	-
UNII7	6565	123	-	41.72	-	-	37.990	-
	6685	147	-	41.55	-	-	38.006	-
	6845	179	-	41.59	-	-	38.003	-
UNII8	6885	187	-	41.71	-	-	37.992	-
	7005	211	-	41.48	-	-	37.985	-
	7085	227	-	41.72	-	-	38.003	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.44	-	-	37.941	-
	6165	43	-	42.17	-	-	37.975	-
	6405	91	-	42.15	-	-	37.936	-
UNII6	6445	99	-	42.06	-	-	37.945	-
	6485	107	-	42.31	-	-	37.955	-
	6525	115	-	42.38	-	-	37.994	-
UNII7	6565	123	-	41.58	-	-	37.989	-
	6685	147	-	42.42	-	-	37.970	-
	6845	179	-	42.20	-	-	37.952	-
UNII8	6885	187	-	42.15	-	-	37.939	-
	7005	211	-	42.18	-	-	37.973	-
	7085	227	-	42.15	-	-	37.959	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	24.02	27.26	23.46	20.066	22.715	20.412
	6145	39	22.60	24.27	21.34	19.423	21.208	20.352
	6385	87	23.48	25.00	23.09	19.976	22.257	19.838
UNII6	6465	103	23.46	21.29	22.43	19.943	20.635	20.093
	6545	119	23.76	25.19	25.93	19.908	21.854	20.625
UNII7	6625	135	23.22	24.54	22.09	20.223	21.754	20.190
	6705	151	23.52	21.75	22.08	19.850	21.279	20.372
	6785	167	21.74	27.10	23.62	19.934	22.292	20.439
UNII8	6865	183	22.36	24.48	22.73	19.933	22.146	20.456
	6945	199	26.18	23.77	25.89	20.085	21.803	20.929
	7025	215	24.19	26.25	21.46	20.132	22.351	19.834

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.02	33.07	29.79	20.645	22.310	20.279
	6145	39	27.83	33.04	28.13	19.909	23.075	20.380
	6385	87	26.86	33.95	29.03	20.280	22.084	19.750
UNII6	6465	103	24.99	31.86	26.49	19.741	22.257	19.911
	6545	119	25.92	31.90	24.77	19.539	22.901	20.341
UNII7	6625	135	27.34	31.43	24.08	20.301	22.398	20.398
	6705	151	27.93	31.20	29.87	20.276	22.379	21.060
	6785	167	29.35	27.82	29.53	19.507	22.754	20.217
UNII8	6865	183	27.83	26.89	30.05	20.134	22.859	21.372
	6945	199	27.09	32.37	28.20	20.077	22.899	20.774
	7025	215	27.12	27.70	28.08	19.973	22.408	20.249

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	28.94	36.02	28.85	18.997	21.585	20.126
	6145	39	29.17	35.08	29.55	19.282	22.527	20.089
	6385	87	29.58	35.04	28.20	19.551	22.183	19.833
UNII6	6465	103	27.66	35.40	28.27	19.540	22.245	19.880
	6545	119	27.07	33.97	27.25	19.695	20.921	20.707
UNII7	6625	135	29.42	35.55	27.83	19.438	22.227	20.610
	6705	151	28.60	35.80	28.99	19.638	22.293	20.056
	6785	167	26.55	32.55	27.77	19.328	21.561	19.138
UNII8	6865	183	28.89	36.99	27.93	20.407	22.045	21.072
	6945	199	27.70	34.62	30.36	19.751	21.855	21.185
	7025	215	26.30	34.82	28.43	19.113	22.072	19.886

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	34.24	35.53	32.70	22.930	23.093	22.685
	6145	39	33.68	35.13	32.69	22.600	23.183	22.055
	6385	87	44.58	36.07	32.11	22.399	22.780	22.604
UNII6	6465	103	44.57	35.27	42.96	22.477	22.559	22.461
	6545	119	30.88	34.77	31.45	21.572	23.266	22.554
UNII7	6625	135	32.92	36.52	32.40	22.449	22.001	22.776
	6705	151	33.28	34.32	32.29	22.143	23.063	23.008
	6785	167	33.28	34.26	32.05	22.224	22.741	22.868
UNII8	6865	183	32.80	35.31	33.82	22.410	22.318	22.782
	6945	199	32.26	35.01	34.93	22.243	23.148	23.644
	7025	215	33.19	35.76	32.25	22.545	23.298	22.116

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	69.50	-	69.38	54.160	-	42.678
	6145	39	69.73	-	72.68	53.154	-	43.824
	6385	87	69.46	-	71.06	53.889	-	42.968
UNII6	6465	103	69.71	-	71.54	53.478	-	43.422
	6545	119	69.12	-	70.40	53.745	-	44.152
UNII7	6625	135	69.68	-	71.63	54.045	-	43.238
	6705	151	68.70	-	70.67	53.019	-	43.748
	6785	167	69.53	-	71.76	53.994	-	43.434
UNII8	6865	183	67.62	-	70.60	53.083	-	44.197
	6945	199	68.01	-	72.87	52.965	-	44.433
	7025	215	67.63	-	72.61	53.333	-	44.546

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	86.64	-	-	77.719	-
	6145	39	-	86.58	-	-	77.714	-
	6385	87	-	86.43	-	-	77.782	-
UNII6	6465	103	-	86.28	-	-	77.716	-
	6545	119	-	86.18	-	-	77.647	-
UNII7	6625	135	-	86.49	-	-	77.708	-
	6705	151	-	86.27	-	-	77.696	-
	6785	167	-	86.68	-	-	77.800	-
UNII8	6865	183	-	86.99	-	-	77.742	-
	6945	199	-	87.24	-	-	77.794	-
	7025	215	-	86.81	-	-	77.697	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.92	-	-	77.765	-
	6145	39	-	86.97	-	-	77.825	-
	6385	87	-	86.88	-	-	77.835	-
UNII6	6465	103	-	87.51	-	-	77.694	-
	6545	119	-	89.96	-	-	77.716	-
UNII7	6625	135	-	88.07	-	-	77.800	-
	6705	151	-	87.98	-	-	77.741	-
	6785	167	-	87.17	-	-	77.781	-
UNII8	6865	183	-	87.41	-	-	77.751	-
	6945	199	-	87.67	-	-	77.783	-
	7025	215	-	87.24	-	-	77.770	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	28.99	29.96	29.71	25.440	26.995	26.105
	6185	47	23.97	23.53	28.54	21.640	22.270	27.160
	6345	79	29.32	28.68	28.18	23.440	26.288	26.574
UNII6	6505	111	22.45	26.41	30.94	21.859	24.329	28.959
UNII7	6665	143	24.33	17.91	27.85	21.997	20.036	26.981
UNII8	6825	175	25.93	25.53	27.74	25.516	25.131	26.004
	6985	207	23.78	26.95	29.75	21.679	25.787	27.556

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	26.00	30.67	33.25	22.159	25.333	27.469
	6185	47	27.53	31.52	30.13	23.208	25.627	26.815
	6345	79	27.88	30.57	29.69	22.045	25.289	27.835
UNII6	6505	111	27.24	35.68	32.82	23.808	26.774	27.875
UNII7	6665	143	28.49	31.52	29.96	22.621	26.663	26.602
UNII8	6825	175	25.65	33.02	33.35	21.806	24.816	27.412
	6985	207	28.60	36.32	34.75	23.081	28.067	28.194

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	37.84	37.06	36.87	25.108	24.256	24.569
	6185	47	34.00	36.08	33.95	25.029	25.653	26.666
	6345	79	32.58	37.53	32.82	23.506	25.248	25.022
UNII6	6505	111	39.87	41.09	34.47	23.851	24.282	25.280
UNII7	6665	143	32.41	37.58	35.86	25.711	24.300	25.152
UNII8	6825	175	31.68	37.66	34.63	24.478	26.800	24.273
	6985	207	33.60	39.53	34.08	24.119	25.773	24.102

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	42.18	45.93	45.80	28.358	28.751	26.563
	6185	47	45.70	44.08	44.51	29.299	27.825	26.796
	6345	79	46.00	45.47	43.96	30.144	27.683	26.513
UNII6	6505	111	43.70	46.18	45.27	29.345	26.768	26.171
UNII7	6665	143	45.12	45.30	43.91	30.239	28.245	26.668
UNII8	6825	175	40.75	48.11	42.73	29.406	29.171	26.365
	6985	207	42.37	46.85	43.45	28.420	28.036	26.234

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	86.70	-	71.94	46.383	-	49.868
	6185	47	87.10	-	107.9	44.799	-	48.741
	6345	79	88.50	-	109.6	45.902	-	49.560
UNII6	6505	111	88.43	-	105.8	43.318	-	49.031
UNII7	6665	143	87.54	-	72.19	44.363	-	48.167
UNII8	6825	175	86.43	-	105.5	43.424	-	49.510
	6985	207	87.03	-	74.98	42.379	-	49.037

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	135.4	-	-	79.933	-
	6185	47	-	137.4	-	-	81.120	-
	6345	79	-	136.5	-	-	80.537	-
UNII6	6505	111	-	135.6	-	-	79.843	-
UNII7	6665	143	-	134.4	-	-	79.886	-
UNII8	6825	175	-	136.0	-	-	80.036	-
	6985	207	-	134.8	-	-	79.673	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	27.51	27.41	30.44	25.435	31.172	27.701
	6185	47	24.10	26.13	26.46	24.135	27.344	23.317
	6345	79	28.47	26.60	29.55	26.438	27.723	23.385
UNII6	6505	111	30.10	27.73	29.33	25.795	28.310	23.116
UNII7	6665	143	24.96	28.04	24.61	24.314	29.055	22.024
UNII8	6825	175	28.50	28.97	24.82	25.368	28.706	21.797
	6985	207	25.89	26.33	31.51	25.388	29.203	27.478

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	35.60	36.35	85.62	26.447	32.255	26.877
	6185	47	35.40	39.13	31.58	25.194	31.175	26.461
	6345	79	31.70	38.97	30.09	27.247	30.400	21.662
UNII6	6505	111	35.60	34.93	30.05	27.101	28.256	25.679
UNII7	6665	143	32.89	40.44	30.29	27.114	30.178	26.219
UNII8	6825	175	37.20	30.64	27.16	27.508	29.081	23.341
	6985	207	33.66	36.67	32.32	26.846	29.599	26.740

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	37.86	37.04	32.12	25.719	28.138	23.195
	6185	47	33.21	40.68	35.90	26.761	27.646	24.986
	6345	79	37.32	40.79	32.64	26.698	28.072	23.061
UNII6	6505	111	35.48	35.14	32.12	25.579	26.244	24.446
UNII7	6665	143	34.35	35.60	33.53	27.434	29.481	25.586
UNII8	6825	175	38.89	41.91	30.97	27.078	28.706	24.120
	6985	207	42.09	39.99	35.70	26.538	27.717	25.285

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	50.94	49.66	44.94	30.300	30.743	28.757
	6185	47	50.68	45.30	42.97	30.529	27.439	29.386
	6345	79	51.28	50.78	85.96	32.140	28.233	28.342
UNII6	6505	111	50.03	51.23	43.75	32.927	29.973	27.510
UNII7	6665	143	50.06	49.61	85.61	32.440	29.818	29.998
UNII8	6825	175	45.64	49.63	41.59	33.462	30.244	28.637
	6985	207	48.95	54.25	44.05	31.592	30.048	29.191

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	93.70	-	87.58	54.513	-	51.094
	6185	47	93.14	-	86.93	51.038	-	50.629
	6345	79	103.8	-	88.50	57.514	-	48.976
UNII6	6505	111	103.6	-	87.59	53.889	-	50.123
UNII7	6665	143	95.31	-	86.44	52.555	-	50.441
UNII8	6825	175	95.12	-	87.17	50.001	-	50.045
	6985	207	94.09	-	87.57	52.450	-	53.448

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	133.9	-	-	82.398	-
	6185	47	-	132.5	-	-	81.125	-
	6345	79	-	132.3	-	-	79.705	-
UNII6	6505	111	-	134.9	-	-	82.298	-
UNII7	6665	143	-	132.7	-	-	80.935	-
UNII8	6825	175	-	134.1	-	-	80.491	-
	6985	207	-	137.6	-	-	84.234	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	171.1	-	-	156.96	-
	6185	47	-	174.1	-	-	157.02	-
	6345	79	-	175.5	-	-	157.22	-
UNII6	6505	111	-	173.2	-	-	157.16	-
UNII7	6665	143	-	171.8	-	-	156.95	-
UNII8	6825	175	-	172.6	-	-	157.08	-
	6985	207	-	175.2	-	-	156.94	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	170.7	-	-	156.74	-
	6185	47	-	171.4	-	-	156.56	-
	6345	79	-	174.2	-	-	156.98	-
UNII6	6505	111	-	172.6	-	-	157.01	-
UNII7	6665	143	-	172.8	-	-	156.71	-
UNII8	6825	175	-	172.5	-	-	156.90	-
	6985	207	-	171.2	-	-	156.77	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	162.9	127.0	101.0	47.629	41.034	43.544
	6265	63	33.33	32.66	103.6	45.100	38.964	42.963
UNII6	6425	95	170.1	129.3	36.95	155.63	64.254	43.974
	6585	127	164.7	137.2	102.0	161.69	53.527	50.532
UNII8	6745	159	169.9	41.00	104.6	166.39	40.157	46.635
	6905	191	172.4	133.3	103.0	50.355	54.025	50.520

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	36.98	45.31	108.1	44.988	34.821	68.737
	6265	63	32.55	42.76	34.89	42.475	43.102	41.355
UNII6	6425	95	34.64	43.02	104.2	36.476	35.963	48.214
	6585	127	36.47	41.44	104.1	42.404	37.907	54.321
UNII8	6745	159	33.44	42.50	100.1	42.084	40.176	48.996
	6905	191	30.77	41.32	106.4	42.580	40.988	61.676

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	168.3	139.5	103.9	50.980	66.177	33.367
	6265	63	173.2	142.7	50.15	88.993	52.320	39.517
UNII6	6425	95	172.6	147.4	110.9	48.031	127.07	41.581
	6585	127	171.0	141.5	111.9	58.716	55.090	40.518
UNII8	6745	159	172.0	140.2	111.8	54.143	112.65	44.881
	6905	191	170.3	145.5	45.03	44.303	39.623	35.696

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	173.8	163.7	135.2	58.089	145.36	111.36
	6265	63	174.7	160.3	129.1	158.93	146.10	84.964
UNII6	6425	95	173.2	164.6	133.2	156.68	149.88	110.96
	6585	127	170.5	165.4	128.7	86.516	149.06	113.10
UNII8	6745	159	167.9	156.9	130.6	62.398	59.897	111.21
	6905	191	174.4	165.0	131.3	75.148	140.38	110.55

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	177.1	-	151.0	162.68	-	127.47
	6265	63	181.0	-	155.5	164.13	-	127.82
UNII6	6425	95	180.1	-	153.2	162.65	-	125.60
	6585	127	178.5	-	149.7	160.99	-	125.68
UNII8	6745	159	172.0	-	155.4	163.10	-	128.61
	6905	191	178.5	-	155.2	162.30	-	128.20

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	172.4	-	-	104.96	-
	6265	63	-	171.9	-	-	115.32	-
UNII6	6425	95	-	171.5	-	-	105.11	-
	6585	127	-	171.3	-	-	99.741	-
UNII8	6745	159	-	169.1	-	-	101.67	-
	6905	191	-	170.9	-	-	105.92	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	38.35	57.10	38.74	38.612	47.972	43.092
	6265	63	91.52	49.44	42.36	89.024	35.521	44.956
UNII6	6425	95	97.58	47.35	37.66	66.253	40.101	40.175
	6585	127	90.64	29.09	39.40	93.176	48.964	39.295
UNII8	6745	159	95.10	58.49	37.73	91.479	45.056	37.199
	6905	191	26.64	35.63	44.18	39.999	36.055	40.889

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	39.26	37.95	43.04	38.234	40.308	48.248
	6265	63	47.31	45.39	41.88	42.891	41.758	42.362
UNII6	6425	95	37.77	45.13	40.31	42.065	43.377	43.042
	6585	127	41.27	40.51	47.58	41.732	43.934	45.938
UNII8	6745	159	42.67	43.20	43.61	38.372	39.327	42.882
	6905	191	38.80	38.83	45.94	38.527	40.456	46.080

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	54.83	66.00	45.40	40.355	55.234	38.807
	6265	63	101.1	59.34	49.46	53.782	53.316	38.134
UNII6	6425	95	51.89	58.37	45.64	41.793	38.218	36.432
	6585	127	98.98	52.98	52.22	45.805	43.664	39.760
UNII8	6745	159	100.7	68.37	45.86	57.427	55.108	37.719
	6905	191	103.6	57.28	45.08	45.289	40.574	34.739

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	111.2	89.35	67.33	87.276	67.197	38.374
	6265	63	108.2	89.10	66.62	79.333	68.478	37.689
UNII6	6425	95	111.3	89.35	64.69	90.095	49.964	36.444
	6585	127	112.5	87.26	70.15	90.531	72.469	42.272
UNII8	6745	159	112.5	93.34	73.86	90.286	70.414	41.675
	6905	191	111.5	89.31	69.30	90.785	68.083	39.171

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	127.0	-	154.9	100.02	-	91.974
	6265	63	123.7	-	150.4	95.245	-	84.450
UNII6	6425	95	124.7	-	124.0	102.49	-	76.450
	6585	127	123.8	-	121.4	99.054	-	83.583
UNII8	6745	159	128.6	-	148.3	101.00	-	89.606
	6905	191	123.8	-	146.9	98.944	-	87.849

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	173.8	-	-	106.17	-
	6265	63	-	172.9	-	-	103.02	-
UNII6	6425	95	-	170.3	-	-	104.17	-
	6585	127	-	177.2	-	-	105.67	-
UNII8	6745	159	-	174.7	-	-	105.51	-
	6905	191	-	144.6	-	-	98.715	-

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	42.41	63.04	36.34	43.785	43.150	34.240
	6265	63	36.93	33.89	36.29	39.289	38.846	38.800
UNII6	6425	95	35.43	58.52	91.08	38.255	39.959	49.624
	6585	127	39.35	40.75	93.83	39.542	42.631	40.817
UNII8	6745	159	36.05	44.98	33.51	37.045	42.739	36.602
	6905	191	33.42	58.88	90.24	34.687	41.854	68.515

Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	38.02	50.93	100.8	42.969	40.566	93.839
	6265	63	44.19	42.35	43.43	40.790	42.429	44.979
UNII6	6425	95	40.24	46.05	102.5	37.439	42.655	58.596
	6585	127	51.11	43.42	95.02	43.134	41.723	50.341
UNII8	6745	159	48.73	43.69	90.52	41.224	41.701	90.345
	6905	191	42.31	53.91	92.49	40.251	44.817	86.304

Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	57.91	75.04	94.80	42.785	64.491	43.074
	6265	63	58.52	73.17	96.29	41.358	61.822	41.747
UNII6	6425	95	53.57	75.55	96.50	38.057	54.188	41.210
	6585	127	48.67	68.49	97.80	40.048	45.293	41.277
UNII8	6745	159	54.26	73.65	97.32	40.885	62.753	43.514
	6905	191	50.63	69.87	92.85	40.936	62.021	44.509

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	73.74	66.07	108.9	43.854	51.706	90.077
	6265	63	78.29	64.43	107.8	45.760	48.412	90.570
UNII6	6425	95	69.97	68.49	104.5	40.592	51.646	90.023
	6585	127	70.13	64.75	107.8	46.161	52.551	88.685
UNII8	6745	159	82.01	68.57	112.1	46.953	43.384	89.041
	6905	191	83.51	72.39	107.4	50.066	51.191	88.771

Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	104.1	-	103.8	68.198	-	91.165
	6265	63	95.83	-	108.4	72.711	-	92.491
UNII6	6425	95	99.15	-	106.5	68.781	-	90.340
	6585	127	99.68	-	103.2	70.422	-	90.445
UNII8	6745	159	103.2	-	106.8	75.250	-	92.902
	6905	191	98.22	-	107.5	68.958	-	92.921

Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	182.7	-	-	97.184	-
	6265	63	-	182.9	-	-	97.324	-
UNII6	6425	95	-	163.7	-	-	92.254	-
	6585	127	-	180.8	-	-	93.859	-
UNII8	6745	159	-	181.8	-	-	95.993	-
	6905	191	-	153.1	-	-	92.744	-

Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	100.9	143.7	30.43	56.161	44.070	56.548
	6265	63	32.71	140.6	169.0	42.046	45.732	46.687
UNII6	6425	95	103.1	33.35	168.9	100.07	41.613	52.114
	6585	127	108.7	23.66	164.8	89.779	48.833	55.748
UNII8	6745	159	100.3	145.0	29.39	50.344	56.645	51.659
	6905	191	101.0	38.58	172.6	99.888	63.723	106.21

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	38.35	33.47	171.2	36.369	39.280	56.015
	6265	63	53.05	48.55	167.0	46.593	44.805	162.53
UNII6	6425	95	48.43	54.14	167.3	42.770	47.214	163.28
	6585	127	100.6	42.32	171.6	41.971	50.104	86.153
UNII8	6745	159	40.40	55.87	35.14	42.646	47.271	51.068
	6905	191	107.6	43.66	36.23	45.127	53.517	63.448

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	110.9	150.4	167.4	44.500	55.293	40.013
	6265	63	116.9	153.4	165.9	55.886	56.321	41.503
UNII6	6425	95	110.7	154.8	167.0	96.827	133.91	39.292
	6585	127	112.5	54.19	163.5	57.371	46.867	43.882
UNII8	6745	159	102.5	155.8	166.2	41.597	69.369	45.818
	6905	191	113.3	61.77	168.6	48.686	57.700	49.880

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	127.9	137.1	177.0	105.87	125.23	162.89
	6265	63	129.8	142.7	177.4	54.857	126.56	164.28
UNII6	6425	95	127.7	144.0	178.3	73.287	124.42	164.32
	6585	127	128.4	143.1	177.9	108.43	126.62	164.25
UNII8	6745	159	128.7	145.1	173.0	98.201	125.60	164.82
	6905	191	131.9	141.5	175.9	110.09	125.59	165.31

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	153.9	-	180.4	124.09	-	162.90
	6265	63	158.3	-	181.3	125.85	-	160.37
UNII6	6425	95	153.9	-	180.3	121.96	-	161.68
	6585	127	151.8	-	178.8	122.63	-	162.08
UNII8	6745	159	153.0	-	179.7	123.01	-	161.85
	6905	191	155.1	-	176.2	120.25	-	162.90

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	173.8	-	-	104.42	-
	6265	63	-	173.5	-	-	102.01	-
UNII6	6425	95	-	173.5	-	-	107.99	-
	6585	127	-	173.9	-	-	107.48	-
UNII8	6745	159	-	173.5	-	-	107.17	-
	6905	191	-	172.5	-	-	110.99	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	267.8	-	-	193.70	-
	6265	63	-	267.0	-	-	209.67	-
UNII6	6425	95	-	263.8	-	-	200.30	-
	6585	127	-	269.4	-	-	187.08	-
UNII8	6745	159	-	264.0	-	-	179.68	-
	6905	191	-	263.6	-	-	181.25	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	257.6	-	-	228.31	-
	6265	63	-	254.1	-	-	228.40	-
UNII6	6425	95	-	255.1	-	-	213.31	-
	6585	127	-	253.1	-	-	206.97	-
UNII8	6745	159	-	256.3	-	-	222.36	-
	6905	191	-	275.8	-	-	230.48	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	330.5	-	-	314.50	-
	6265	63	-	331.0	-	-	314.85	-
UNII6	6425	95	-	329.3	-	-	314.63	-
	6585	127	-	330.7	-	-	314.47	-
UNII8	6745	159	-	329.0	-	-	314.46	-
	6905	191	-	329.1	-	-	314.14	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	333.7	-	-	314.88	-
	6265	63	-	334.4	-	-	315.14	-
UNII6	6425	95	-	332.7	-	-	315.21	-
	6585	127	-	332.2	-	-	314.60	-
UNII8	6745	159	-	334.3	-	-	315.09	-
	6905	191	-	332.9	-	-	314.10	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.29	-	-	17.724	-
	6175	45	-	20.89	-	-	17.734	-
	6415	93	-	20.98	-	-	17.719	-
UNII6	6435	97	-	21.43	-	-	17.728	-
	6475	105	-	20.85	-	-	17.732	-
	6515	113	-	20.84	-	-	17.716	-
UNII7	6535	117	-	21.04	-	-	17.735	-
	6695	149	-	20.95	-	-	17.725	-
	6855	181	-	20.96	-	-	17.718	-
UNII8	6875	185	-	20.96	-	-	17.714	-
	6995	209	-	21.01	-	-	17.703	-
	7115	233	-	20.88	-	-	17.741	-

10.2.1.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.40	17.86	19.54	18.212	16.702	18.204
	6175	45	19.28	17.95	19.75	18.201	17.057	18.389
	6415	93	19.41	17.90	19.54	18.259	16.986	18.090
UNII6	6435	97	19.38	17.96	19.63	18.135	17.094	18.271
	6475	105	19.32	18.01	19.46	18.162	16.898	18.143
	6515	113	19.30	17.97	19.05	18.218	16.557	17.911
UNII7	6535	117	19.26	18.02	19.66	18.167	16.753	18.223
	6695	149	19.36	18.02	19.45	17.753	16.957	18.094
	6855	181	19.29	17.92	19.63	18.111	17.034	18.103
UNII8	6875	185	19.23	17.61	19.51	18.065	16.633	18.249
	6995	209	19.28	17.95	19.45	18.267	16.921	18.216
	7115	233	19.40	17.95	19.55	18.027	16.528	18.174

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.54	18.10	19.53	17.924	17.073	18.152
	6175	45	19.56	18.00	19.69	18.170	16.692	17.883
	6415	93	19.66	18.54	19.61	18.176	16.993	18.057
UNII6	6435	97	19.57	17.91	19.68	18.196	16.825	18.025
	6475	105	19.46	18.23	19.65	18.164	17.008	18.065
	6515	113	19.63	18.55	19.80	17.963	16.700	18.182
UNII7	6535	117	19.71	18.14	19.47	18.188	17.020	18.094
	6695	149	19.67	18.26	19.59	18.199	17.072	18.047
	6855	181	19.63	18.00	19.72	17.918	16.593	18.111
UNII8	6875	185	19.52	18.49	19.67	18.097	16.928	17.787
	6995	209	19.73	18.40	19.65	18.032	17.116	18.094
	7115	233	19.66	18.57	19.60	18.155	17.044	18.041

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.57	-	20.10	18.199	-	18.153
	6175	45	19.55	-	20.37	18.016	-	18.132
	6415	93	19.66	-	20.28	18.170	-	18.214
UNII6	6435	97	19.52	-	20.26	18.192	-	18.197
	6475	105	19.57	-	20.23	18.126	-	18.045
	6515	113	19.58	-	20.26	18.189	-	18.193
UNII7	6535	117	19.67	-	20.14	18.186	-	18.209
	6695	149	19.51	-	19.89	18.176	-	18.166
	6855	181	19.50	-	20.40	17.889	-	17.848
UNII8	6875	185	19.63	-	20.21	18.108	-	17.814
	6995	209	19.60	-	20.41	18.140	-	18.183
	7115	233	19.61	-	20.14	18.218	-	18.021

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.92	-	-	19.040	-
	6175	45	-	21.02	-	-	19.037	-
	6415	93	-	20.97	-	-	19.040	-
UNII6	6435	97	-	20.93	-	-	19.015	-
	6475	105	-	21.00	-	-	19.023	-
	6515	113	-	20.92	-	-	19.027	-
UNII7	6535	117	-	20.93	-	-	19.030	-
	6695	149	-	21.10	-	-	19.019	-
	6855	181	-	21.02	-	-	19.041	-
UNII8	6875	185	-	20.96	-	-	19.026	-
	6995	209	-	21.01	-	-	19.035	-
	7115	233	-	20.83	-	-	19.031	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.11	-	-	19.014	-
	6175	45	-	21.52	-	-	19.002	-
	6415	93	-	21.42	-	-	19.010	-
UNII6	6435	97	-	21.60	-	-	19.046	-
	6475	105	-	21.49	-	-	19.029	-
	6515	113	-	21.28	-	-	19.048	-
UNII7	6535	117	-	21.56	-	-	18.987	-
	6695	149	-	21.51	-	-	19.008	-
	6855	181	-	21.64	-	-	19.029	-
UNII8	6875	185	-	21.44	-	-	19.044	-
	6995	209	-	21.30	-	-	19.036	-
	7115	233	-	21.37	-	-	19.031	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.84	22.18	20.73	18.410	20.506	18.553
	6165	43	19.89	22.46	20.49	18.195	20.074	18.246
	6405	91	19.71	22.21	21.58	18.293	20.062	18.566
UNII6	6445	99	20.26	20.50	20.59	18.284	18.785	18.514
	6485	107	19.55	22.21	21.03	18.165	19.943	18.505
	6525	115	19.81	21.72	19.28	18.484	19.949	17.903
UNII7	6565	123	19.77	21.83	20.59	17.773	19.859	18.603
	6685	147	19.82	22.28	21.00	18.433	20.296	18.427
	6845	179	20.04	21.71	20.08	18.404	19.900	18.239
UNII8	6885	187	19.98	21.84	20.62	17.604	19.712	18.417
	7005	211	20.33	21.91	22.73	18.393	20.081	18.580
	7085	227	20.35	21.56	20.37	18.414	20.282	18.376

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.43	22.28	23.71	18.026	19.887	18.416
	6165	43	20.43	22.80	23.72	18.180	19.839	18.408
	6405	91	20.32	22.79	24.06	18.248	18.941	17.316
UNII6	6445	99	20.39	22.60	22.87	18.255	19.682	18.303
	6485	107	20.70	22.57	23.80	18.252	19.229	17.955
	6525	115	20.99	22.68	23.88	18.219	19.703	18.363
UNII7	6565	123	20.66	22.68	24.15	18.214	19.728	18.411
	6685	147	20.67	23.24	22.81	18.157	20.109	18.342
	6845	179	20.69	22.60	24.07	18.275	19.497	18.442
UNII8	6885	187	20.54	22.14	24.42	18.188	19.608	18.409
	7005	211	20.90	23.08	25.58	18.189	19.871	18.380
	7085	227	20.78	22.20	23.82	18.281	19.554	18.267

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	31.35	30.17	27.52	18.041	19.509	18.132
	6165	43	31.07	28.67	26.48	17.894	19.319	18.292
	6405	91	23.10	30.43	27.69	18.040	19.358	18.267
UNII6	6445	99	23.19	30.07	27.41	17.965	19.349	18.151
	6485	107	23.25	30.43	26.23	18.040	19.568	18.270
	6525	115	22.00	23.66	27.44	18.075	19.182	18.235
UNII7	6565	123	31.46	24.04	26.31	18.069	19.198	18.229
	6685	147	31.14	30.34	26.62	18.041	19.373	18.180
	6845	179	31.12	30.74	24.97	18.078	19.251	18.004
UNII8	6885	187	31.34	23.38	26.34	18.036	19.378	18.225
	7005	211	31.28	23.58	25.01	18.009	19.246	18.201
	7085	227	23.05	30.03	26.22	17.984	19.056	18.101

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.84	-	35.70	19.369	-	19.804
	6165	43	34.93	-	35.93	19.398	-	19.871
	6405	91	34.98	-	35.96	19.511	-	19.716
UNII6	6445	99	34.97	-	36.01	19.448	-	19.849
	6485	107	34.69	-	35.74	19.406	-	19.939
	6525	115	35.08	-	36.10	19.370	-	20.065
UNII7	6565	123	34.90	-	35.61	19.454	-	19.891
	6685	147	34.99	-	36.00	19.367	-	19.722
	6845	179	34.94	-	35.98	19.405	-	19.814
UNII8	6885	187	34.84	-	35.90	19.524	-	19.749
	7005	211	34.77	-	35.97	19.454	-	19.909
	7085	227	35.02	-	36.09	19.454	-	20.048

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.50	-	-	37.971	-
	6165	43	-	41.50	-	-	37.949	-
	6405	91	-	41.58	-	-	38.007	-
UNII6	6445	99	-	41.75	-	-	37.972	-
	6485	107	-	41.64	-	-	37.986	-
	6525	115	-	41.56	-	-	37.975	-
UNII7	6565	123	-	41.61	-	-	37.947	-
	6685	147	-	41.73	-	-	37.991	-
	6845	179	-	41.64	-	-	38.011	-
UNII8	6885	187	-	41.51	-	-	37.981	-
	7005	211	-	41.64	-	-	37.991	-
	7085	227	-	41.82	-	-	37.964	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.87	-	-	37.969	-
	6165	43	-	42.11	-	-	37.972	-
	6405	91	-	41.64	-	-	37.967	-
UNII6	6445	99	-	42.59	-	-	37.971	-
	6485	107	-	42.48	-	-	37.922	-
	6525	115	-	42.53	-	-	37.966	-
UNII7	6565	123	-	42.34	-	-	37.973	-
	6685	147	-	42.15	-	-	37.978	-
	6845	179	-	42.23	-	-	37.938	-
UNII8	6885	187	-	42.12	-	-	37.977	-
	7005	211	-	42.13	-	-	37.975	-
	7085	227	-	42.18	-	-	37.976	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	22.75	26.59	24.13	20.281	22.098	20.521
	6145	39	22.31	21.17	24.76	19.958	21.042	19.849
	6385	87	23.30	23.29	23.06	20.061	21.088	19.921
UNII6	6465	103	22.47	26.52	24.44	20.472	19.940	20.156
	6545	119	24.98	23.24	23.66	19.829	21.342	19.976
UNII7	6625	135	23.32	24.29	24.64	20.185	21.795	20.443
	6705	151	22.21	22.63	26.79	19.725	21.819	20.974
	6785	167	24.59	22.69	27.56	19.938	21.463	20.313
UNII8	6865	183	22.20	26.94	26.03	19.902	22.277	20.824
	6945	199	24.11	27.38	25.24	20.156	21.931	19.932
	7025	215	22.11	26.18	26.69	20.126	21.642	20.351

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	25.78	33.32	26.86	20.127	21.054	20.473
	6145	39	25.59	30.79	30.10	20.146	22.803	20.509
	6385	87	27.77	32.80	26.36	20.209	22.730	20.197
UNII6	6465	103	28.25	31.51	28.24	20.060	22.612	20.119
	6545	119	24.56	29.21	29.82	20.100	22.160	20.473
UNII7	6625	135	26.94	30.90	24.95	19.919	22.697	19.899
	6705	151	26.59	33.80	29.50	20.885	22.473	20.469
	6785	167	26.86	33.51	26.92	20.633	22.811	20.599
UNII8	6865	183	26.82	34.14	27.33	20.025	22.857	20.406
	6945	199	27.97	31.15	30.38	19.916	22.061	20.779
	7025	215	28.55	33.24	26.52	20.674	22.325	20.033

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	26.57	31.20	29.02	19.099	21.333	19.983
	6145	39	29.07	34.58	28.44	19.495	21.595	20.055
	6385	87	29.47	32.08	28.10	19.489	22.044	19.632
UNII6	6465	103	30.64	34.60	29.03	20.145	21.394	20.330
	6545	119	28.88	33.96	30.69	19.465	21.017	20.413
UNII7	6625	135	29.64	34.54	28.19	19.747	21.832	20.496
	6705	151	29.58	34.08	27.81	20.565	21.785	19.983
	6785	167	29.78	33.76	28.91	19.662	21.536	19.718
UNII8	6865	183	29.15	34.82	27.84	19.727	23.229	19.536
	6945	199	29.39	34.02	28.24	20.073	22.405	19.289
	7025	215	28.78	34.17	30.04	20.513	21.128	19.962

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	36.50	35.33	32.38	23.449	23.165	22.609
	6145	39	33.29	34.53	32.14	22.338	22.400	22.601
	6385	87	33.69	36.35	31.59	22.528	23.574	22.732
UNII6	6465	103	32.42	35.74	32.05	22.162	22.766	22.924
	6545	119	31.84	36.18	31.48	22.563	22.978	22.744
UNII7	6625	135	33.28	36.54	31.81	22.492	22.766	22.505
	6705	151	44.16	35.26	32.91	22.686	22.671	22.550
	6785	167	33.20	35.41	32.91	22.350	22.823	22.202
UNII8	6865	183	33.85	34.56	32.50	22.409	22.532	22.502
	6945	199	44.84	35.56	35.43	22.616	23.063	23.433
	7025	215	33.21	35.58	31.40	22.289	23.893	22.239

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	68.94	-	69.76	54.225	-	43.383
	6145	39	69.42	-	73.04	53.648	-	44.462
	6385	87	69.47	-	72.04	54.453	-	44.586
UNII6	6465	103	69.53	-	71.68	53.022	-	43.762
	6545	119	69.18	-	69.81	53.861	-	43.790
UNII7	6625	135	69.43	-	71.38	53.107	-	42.586
	6705	151	69.15	-	70.70	54.539	-	43.711
	6785	167	69.36	-	72.30	54.165	-	43.766
UNII8	6865	183	68.83	-	70.48	54.826	-	43.447
	6945	199	69.05	-	71.19	54.653	-	43.195
	7025	215	68.88	-	71.53	54.250	-	43.711

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	88.01	-	-	77.764	-
	6145	39	-	86.73	-	-	77.674	-
	6385	87	-	86.60	-	-	77.685	-
UNII6	6465	103	-	87.56	-	-	77.732	-
	6545	119	-	87.64	-	-	77.689	-
UNII7	6625	135	-	87.67	-	-	77.739	-
	6705	151	-	87.01	-	-	77.750	-
	6785	167	-	86.88	-	-	77.716	-
UNII8	6865	183	-	87.19	-	-	77.734	-
	6945	199	-	87.35	-	-	77.755	-
	7025	215	-	88.18	-	-	77.744	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	88.56	-	-	77.772	-
	6145	39	-	88.33	-	-	77.737	-
	6385	87	-	89.23	-	-	77.807	-
UNII6	6465	103	-	87.96	-	-	77.694	-
	6545	119	-	88.61	-	-	77.779	-
UNII7	6625	135	-	87.63	-	-	77.846	-
	6705	151	-	88.47	-	-	77.726	-
	6785	167	-	87.66	-	-	77.761	-
UNII8	6865	183	-	87.27	-	-	77.733	-
	6945	199	-	87.47	-	-	77.663	-
	7025	215	-	89.27	-	-	77.742	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	27.62	26.24	26.30	21.753	23.867	27.004
	6185	47	27.81	26.41	26.35	22.112	23.335	25.411
	6345	79	26.74	25.96	29.14	22.888	23.967	25.952
UNII6	6505	111	23.81	26.76	29.20	22.177	25.159	27.133
UNII7	6665	143	24.79	26.36	29.95	21.765	24.213	26.347
UNII8	6825	175	26.31	25.72	32.71	25.775	24.722	26.795
	6985	207	24.51	29.69	28.94	21.822	26.621	26.194

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	30.18	36.96	34.04	22.334	25.986	27.160
	6185	47	29.07	36.00	33.27	23.272	27.911	28.223
	6345	79	30.23	33.74	30.87	22.194	26.736	27.622
UNII6	6505	111	26.69	32.66	35.26	21.319	26.188	28.213
UNII7	6665	143	29.32	32.73	30.86	25.411	24.862	26.879
UNII8	6825	175	28.52	29.86	31.69	23.172	24.655	27.276
	6985	207	28.48	29.38	33.60	22.725	24.460	28.388

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	36.74	40.83	36.38	25.126	25.896	25.223
	6185	47	29.73	41.69	36.90	23.066	24.353	25.113
	6345	79	36.33	40.94	32.32	24.420	24.323	24.098
UNII6	6505	111	30.80	38.82	34.90	23.703	24.688	25.068
UNII7	6665	143	33.52	33.33	35.90	24.916	25.655	25.286
UNII8	6825	175	35.88	39.85	34.20	24.780	26.468	24.786
	6985	207	36.18	33.61	37.47	24.868	25.260	25.057

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.25	45.20	43.41	29.758	28.820	26.007
	6185	47	44.35	45.19	43.47	28.644	27.916	26.375
	6345	79	43.55	72.58	44.90	30.347	28.307	26.278
UNII6	6505	111	44.58	73.41	42.79	29.460	26.951	26.644
UNII7	6665	143	88.37	73.98	45.41	30.882	29.100	27.165
UNII8	6825	175	87.50	73.02	39.56	30.981	28.976	26.189
	6985	207	44.54	46.83	41.43	29.321	27.901	26.094

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	86.77	-	74.69	44.373	-	48.483
	6185	47	86.41	-	107.1	45.084	-	47.106
	6345	79	87.86	-	108.0	44.582	-	48.867
UNII6	6505	111	87.16	-	105.4	43.309	-	49.442
UNII7	6665	143	67.96	-	102.1	44.022	-	50.578
UNII8	6825	175	88.65	-	110.1	43.845	-	49.436
	6985	207	88.46	-	107.2	44.470	-	50.066

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	138.7	-	-	79.867	-
	6185	47	-	141.4	-	-	80.807	-
	6345	79	-	142.2	-	-	79.967	-
UNII6	6505	111	-	134.8	-	-	79.526	-
UNII7	6665	143	-	137.4	-	-	80.731	-
UNII8	6825	175	-	142.5	-	-	80.870	-
	6985	207	-	139.2	-	-	80.029	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	28.75	26.78	24.72	24.943	29.952	22.556
	6185	47	28.04	28.90	26.36	25.599	28.719	24.778
	6345	79	27.10	24.09	29.31	25.387	26.558	23.129
UNII6	6505	111	28.95	24.90	29.45	27.505	27.952	23.809
UNII7	6665	143	27.79	24.80	22.81	26.477	28.864	21.993
UNII8	6825	175	30.05	17.83	27.23	25.999	21.364	23.895
	6985	207	25.50	29.88	25.73	25.660	29.495	23.570

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	36.70	39.53	30.70	26.426	32.214	25.677
	6185	47	33.89	35.56	25.53	26.345	29.689	22.815
	6345	79	36.12	39.73	31.06	27.661	29.465	23.502
UNII6	6505	111	32.61	38.60	28.47	28.020	30.135	24.681
UNII7	6665	143	34.28	33.67	32.65	27.682	28.765	25.394
UNII8	6825	175	33.99	30.98	31.70	25.343	27.807	24.429
	6985	207	29.38	35.47	25.46	27.307	29.382	23.258

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	38.63	37.64	35.19	26.284	28.322	24.742
	6185	47	38.49	40.14	34.15	25.379	28.368	24.270
	6345	79	39.27	41.41	32.96	27.539	28.637	24.029
UNII6	6505	111	38.71	36.46	32.00	25.143	27.120	22.671
UNII7	6665	143	37.43	36.93	36.00	27.331	27.504	22.764
UNII8	6825	175	40.57	41.16	32.21	27.435	28.280	22.219
	6985	207	37.11	40.95	35.95	25.596	27.969	23.722

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	49.02	51.12	85.15	31.493	29.650	28.457
	6185	47	52.20	49.74	46.10	31.786	29.348	28.736
	6345	79	49.39	49.10	43.99	33.135	27.781	28.546
UNII6	6505	111	52.72	52.52	42.39	32.783	29.146	27.695
UNII7	6665	143	49.25	52.33	45.65	30.642	29.110	29.668
UNII8	6825	175	45.69	49.25	38.72	30.571	29.057	27.748
	6985	207	50.78	47.31	42.66	30.132	29.477	27.960

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	95.29	-	86.68	56.183	-	51.604
	6185	47	93.61	-	85.89	51.998	-	50.529
	6345	79	95.16	-	87.57	53.088	-	48.939
UNII6	6505	111	97.35	-	86.42	57.729	-	49.650
UNII7	6665	143	94.34	-	87.63	51.213	-	50.825
UNII8	6825	175	96.42	-	87.18	57.301	-	47.425
	6985	207	94.74	-	86.40	52.741	-	49.201

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	131.8	-	-	83.520	-
	6185	47	-	132.0	-	-	79.849	-
	6345	79	-	131.7	-	-	80.944	-
UNII6	6505	111	-	132.8	-	-	81.728	-
UNII7	6665	143	-	132.2	-	-	80.907	-
UNII8	6825	175	-	125.5	-	-	80.129	-
	6985	207	-	131.4	-	-	80.811	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	175.5	-	-	157.01	-
	6185	47	-	171.1	-	-	157.08	-
	6345	79	-	172.9	-	-	157.67	-
UNII6	6505	111	-	174.8	-	-	157.23	-
UNII7	6665	143	-	174.1	-	-	157.04	-
UNII8	6825	175	-	173.7	-	-	157.13	-
	6985	207	-	174.6	-	-	157.23	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	171.2	-	-	156.46	-
	6185	47	-	171.7	-	-	156.65	-
	6345	79	-	172.2	-	-	156.79	-
UNII6	6505	111	-	174.7	-	-	156.85	-
UNII7	6665	143	-	170.4	-	-	156.53	-
UNII8	6825	175	-	171.6	-	-	156.75	-
	6985	207	-	172.1	-	-	156.66	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	165.1	129.0	28.84	161.94	48.954	38.766
	6265	63	164.2	31.13	38.34	162.41	47.227	49.222
UNII6	6425	95	170.9	38.83	105.5	164.50	39.981	46.937
	6585	127	168.6	131.6	99.63	164.82	44.698	54.508
UNII8	6745	159	30.99	26.17	102.1	53.222	44.276	52.025
	6905	191	172.2	34.37	99.73	166.45	43.597	46.132

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	27.34	41.32	35.97	39.756	36.479	44.087
	6265	63	28.46	36.42	97.43	49.169	36.548	45.232
UNII6	6425	95	27.26	35.11	103.6	37.806	39.199	90.283
	6585	127	29.96	57.06	106.9	40.987	44.146	104.16
UNII8	6745	159	36.72	31.14	42.92	40.978	38.457	41.150
	6905	191	38.13	40.10	105.9	46.223	43.214	89.034

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	166.9	137.5	49.87	46.080	46.519	37.322
	6265	63	170.0	130.9	109.4	39.717	62.356	39.056
UNII6	6425	95	170.7	140.2	107.1	57.905	128.87	39.478
	6585	127	170.9	139.1	108.8	36.566	59.319	39.611
UNII8	6745	159	169.7	142.1	114.7	49.622	127.16	38.220
	6905	191	165.0	134.3	109.6	51.039	48.098	40.983

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	173.6	163.8	128.1	97.504	140.11	111.86
	6265	63	172.8	164.3	126.8	91.550	148.31	111.12
UNII6	6425	95	174.0	164.7	134.5	113.33	147.71	113.21
	6585	127	172.1	161.5	137.3	75.068	147.25	112.60
UNII8	6745	159	171.2	166.4	136.7	160.96	144.88	111.95
	6905	191	171.7	163.4	130.4	158.28	149.60	113.04

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	178.9	-	151.4	162.35	-	123.58
	6265	63	180.7	-	156.4	163.96	-	128.05
UNII6	6425	95	180.0	-	150.8	162.98	-	129.13
	6585	127	180.0	-	151.6	161.65	-	125.72
UNII8	6745	159	180.6	-	151.1	162.70	-	127.21
	6905	191	180.0	-	156.2	162.90	-	127.84

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.7	-	-	96.204	-
	6265	63	-	172.1	-	-	113.93	-
UNII6	6425	95	-	171.6	-	-	98.655	-
	6585	127	-	171.2	-	-	101.61	-
UNII8	6745	159	-	171.2	-	-	96.939	-
	6905	191	-	171.0	-	-	111.21	-

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	92.85	41.25	38.38	92.079	40.053	41.625
	6265	63	98.90	53.90	37.71	99.222	40.367	40.184
UNII6	6425	95	36.86	33.36	37.97	41.062	36.414	41.228
	6585	127	34.98	56.93	43.12	41.157	51.313	46.129
UNII8	6745	159	92.79	58.52	38.75	56.110	44.286	37.463
	6905	191	33.92	41.54	45.03	46.330	40.152	40.709

Mode : EHT320(80LM) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	45.06	42.04	43.77	39.332	39.162	45.638
	6265	63	42.38	45.19	46.08	39.249	39.350	42.797
UNII6	6425	95	47.83	44.02	41.75	41.672	40.300	43.515
	6585	127	39.29	44.30	41.10	36.908	42.491	44.522
UNII8	6745	159	36.44	39.56	47.74	35.059	39.699	45.880
	6905	191	45.44	45.12	45.57	41.678	40.855	42.128

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	98.77	61.24	50.84	66.976	53.338	39.475
	6265	63	101.8	57.65	51.69	51.009	43.778	40.403
UNII6	6425	95	103.0	63.53	48.09	91.019	48.966	35.314
	6585	127	100.5	63.98	47.56	49.737	54.716	40.062
UNII8	6745	159	100.6	64.74	48.85	52.929	51.920	37.654
	6905	191	97.71	61.62	42.73	49.257	52.617	35.554

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	110.7	89.48	63.77	91.567	67.343	38.091
	6265	63	112.5	86.56	64.77	91.105	67.391	38.889
UNII6	6425	95	110.6	82.54	57.62	89.392	66.836	36.916
	6585	127	113.7	89.55	68.04	70.318	71.261	41.192
UNII8	6745	159	112.6	90.91	71.00	91.086	68.366	42.804
	6905	191	113.9	92.30	68.04	92.902	68.901	40.454

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	121.1	-	153.5	101.54	-	91.126
	6265	63	123.1	-	148.1	98.183	-	87.892
UNII6	6425	95	127.6	-	150.5	101.29	-	91.471
	6585	127	123.8	-	153.8	97.430	-	93.112
UNII8	6745	159	125.3	-	156.2	101.82	-	93.286
	6905	191	122.6	-	149.0	95.729	-	90.635

Mode : EHT320(80LM) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	168.6	-	-	103.07	-
	6265	63	-	175.4	-	-	102.48	-
UNII6	6425	95	-	168.5	-	-	104.18	-
	6585	127	-	179.9	-	-	106.03	-
UNII8	6745	159	-	174.4	-	-	103.48	-
	6905	191	-	171.1	-	-	102.66	-

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	44.48	39.40	91.34	41.675	44.553	38.091
	6265	63	37.38	62.51	34.42	40.027	43.973	42.655
UNII6	6425	95	35.15	70.37	95.40	39.110	47.445	84.557
	6585	127	39.55	64.00	95.26	40.530	48.932	64.597
UNII8	6745	159	42.03	59.85	85.91	45.671	43.606	37.450
	6905	191	36.58	59.35	41.07	39.415	46.475	42.894

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	38.21	44.22	90.55	37.726	39.138	52.809
	6265	63	38.40	35.52	99.13	44.976	40.089	94.275
UNII6	6425	95	42.19	46.49	101.2	40.549	38.145	95.372
	6585	127	41.84	43.75	100.3	39.259	39.508	44.125
UNII8	6745	159	43.66	48.90	45.80	41.125	40.218	42.670
	6905	191	45.83	50.27	40.64	39.275	41.245	42.201

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	48.58	72.55	95.75	43.057	47.381	39.440
	6265	63	59.80	70.44	96.75	41.408	58.348	42.567
UNII6	6425	95	50.98	74.40	49.93	40.261	64.491	39.774
	6585	127	50.63	54.87	51.81	41.612	42.293	40.731
UNII8	6745	159	52.42	70.96	97.65	39.019	44.398	41.024
	6905	191	54.77	71.77	96.98	41.033	62.505	36.964

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	70.69	66.48	109.5	41.766	52.156	86.678
	6265	63	74.64	67.31	109.0	45.593	51.235	90.059
UNII6	6425	95	58.75	71.75	107.7	41.760	52.145	90.992
	6585	127	78.77	65.34	108.1	44.787	54.033	90.158
UNII8	6745	159	77.69	68.26	106.1	46.577	50.778	89.672
	6905	191	81.43	71.80	107.5	51.307	51.906	90.137

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.3	-	105.2	73.135	-	90.597
	6265	63	98.31	-	109.4	73.285	-	92.055
UNII6	6425	95	100.4	-	107.4	68.979	-	88.313
	6585	127	99.69	-	107.3	75.076	-	90.533
UNII8	6745	159	102.6	-	107.7	71.167	-	91.541
	6905	191	98.37	-	105.5	73.750	-	93.057

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	175.7	-	-	97.039	-
	6265	63	-	182.8	-	-	95.647	-
UNII6	6425	95	-	161.5	-	-	94.711	-
	6585	127	-	180.5	-	-	93.583	-
UNII8	6745	159	-	179.9	-	-	95.298	-
	6905	191	-	161.4	-	-	91.059	-

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	97.73	149.1	169.0	45.679	62.700	55.722
	6265	63	108.1	38.24	166.3	99.127	43.591	76.608
UNII6	6425	95	102.5	33.76	165.6	97.843	59.644	78.139
	6585	127	107.1	143.7	165.7	103.04	129.69	83.569
UNII8	6745	159	106.3	34.78	170.0	93.221	49.381	114.18
	6905	191	103.9	147.8	170.5	98.970	70.745	78.259

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	30.42	38.15	166.2	37.715	39.553	107.23
	6265	63	108.3	37.36	169.8	47.347	41.773	90.061
UNII6	6425	95	33.42	48.81	172.9	44.358	54.185	51.857
	6585	127	24.07	44.89	31.16	37.650	44.858	46.287
UNII8	6745	159	50.11	39.87	169.8	40.770	40.421	54.250
	6905	191	50.23	47.25	173.6	43.106	43.892	114.71

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	111.0	156.2	166.5	99.694	100.67	42.140
	6265	63	54.82	151.8	45.23	42.188	135.46	37.912
UNII6	6425	95	54.20	147.3	169.2	42.365	52.764	37.438
	6585	127	113.7	151.9	43.99	43.173	143.12	41.307
UNII8	6745	159	42.96	150.8	168.2	35.873	59.302	41.655
	6905	191	107.8	152.3	39.53	69.622	143.26	35.213

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	120.4	141.6	177.8	52.309	126.76	161.61
	6265	63	127.4	142.7	176.5	105.47	125.69	162.35
UNII6	6425	95	126.1	145.1	178.0	65.738	124.25	165.24
	6585	127	126.1	142.8	177.6	106.75	113.68	163.78
UNII8	6745	159	128.4	140.9	178.1	109.02	95.129	162.03
	6905	191	129.2	142.1	176.9	108.59	126.33	164.61

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	153.8	-	179.0	125.22	-	163.25
	6265	63	155.2	-	180.3	126.27	-	163.99
UNII6	6425	95	153.6	-	179.1	125.43	-	159.26
	6585	127	154.4	-	175.2	124.73	-	163.15
UNII8	6745	159	153.8	-	177.8	125.09	-	162.59
	6905	191	149.1	-	177.9	125.64	-	163.11

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	174.0	-	-	105.09	-
	6265	63	-	173.7	-	-	108.38	-
UNII6	6425	95	-	173.5	-	-	110.34	-
	6585	127	-	173.4	-	-	106.45	-
UNII8	6745	159	-	173.9	-	-	100.04	-
	6905	191	-	171.6	-	-	102.20	-

Mode : EHT320(160L) 2x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	261.8	-	-	199.66	-
	6265	63	-	265.9	-	-	215.66	-
UNII6	6425	95	-	262.1	-	-	196.44	-
	6585	127	-	266.5	-	-	220.60	-
UNII8	6745	159	-	263.8	-	-	186.80	-
	6905	191	-	265.5	-	-	221.10	-

Mode : EHT320(160U) 2x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	291.5	-	-	233.39	-
	6265	63	-	288.2	-	-	229.76	-
UNII6	6425	95	-	290.9	-	-	222.69	-
	6585	127	-	290.4	-	-	224.00	-
UNII8	6745	159	-	290.2	-	-	215.19	-
	6905	191	-	286.7	-	-	222.08	-

Mode : EHT320 4x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	329.1	-	-	314.34	-
	6265	63	-	330.6	-	-	315.10	-
UNII6	6425	95	-	331.3	-	-	314.88	-
	6585	127	-	331.1	-	-	315.24	-
UNII8	6745	159	-	331.8	-	-	315.15	-
	6905	191	-	331.5	-	-	314.72	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	332.4	-	-	315.15	-
	6265	63	-	334.3	-	-	315.25	-
UNII6	6425	95	-	332.5	-	-	315.45	-
	6585	127	-	333.4	-	-	315.21	-
UNII8	6745	159	-	333.6	-	-	315.49	-
	6905	191	-	333.5	-	-	314.78	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.35	-	-	17.713	-
	6175	45	-	20.99	-	-	17.729	-
	6415	93	-	20.99	-	-	17.720	-
UNII6	6435	97	-	21.01	-	-	17.733	-
	6475	105	-	20.92	-	-	17.715	-
	6515	113	-	20.99	-	-	17.726	-
UNII7	6535	117	-	21.31	-	-	17.699	-
	6695	149	-	21.25	-	-	17.713	-
	6855	181	-	20.91	-	-	17.714	-
UNII8	6875	185	-	20.99	-	-	17.725	-
	6995	209	-	21.00	-	-	17.720	-
	7115	233	-	20.92	-	-	17.727	-

10.2.2 26 dB BANDWIDTH(Standard client)

10.2.2.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.41	17.91	19.61	18.109	16.940	18.241
	6175	45	19.52	17.96	19.62	18.147	16.830	18.276
	6415	93	19.33	17.94	19.55	18.264	16.972	18.282
UNII7	6535	117	19.35	17.91	19.50	18.010	16.835	18.253
	6695	149	19.21	18.00	19.54	17.739	16.945	18.164
	6855	181	19.37	17.92	19.63	18.117	16.975	18.184

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.65	18.38	19.63	18.149	16.784	17.568
	6175	45	19.63	18.20	19.67	18.076	16.429	18.122
	6415	93	19.62	18.11	19.26	18.063	16.934	17.826
UNII7	6535	117	19.65	18.55	19.60	18.137	16.893	18.059
	6695	149	19.62	17.97	19.53	17.794	16.731	18.218
	6855	181	19.70	18.64	19.39	17.766	17.040	18.064

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.58	-	20.21	18.185	-	18.098
	6175	45	19.75	-	20.32	18.163	-	18.067
	6415	93	19.54	-	20.08	18.199	-	18.150
UNII7	6535	117	19.63	-	19.89	18.205	-	18.157
	6695	149	19.70	-	20.08	18.179	-	18.185
	6855	181	19.57	-	20.32	18.171	-	18.205

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.96	-	-	19.035	-
	6175	45	-	21.23	-	-	19.039	-
	6415	93	-	20.96	-	-	19.024	-
UNII7	6535	117	-	20.92	-	-	19.031	-
	6695	149	-	20.95	-	-	19.021	-
	6855	181	-	20.94	-	-	19.041	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.28	-	-	19.016	-
	6175	45	-	21.48	-	-	19.009	-
	6415	93	-	21.35	-	-	19.018	-
UNII7	6535	117	-	21.43	-	-	19.021	-
	6695	149	-	21.20	-	-	19.014	-
	6855	181	-	21.54	-	-	19.024	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	19.87	20.42	20.63	18.313	18.785	18.184
	6165	43	19.67	22.22	20.25	18.255	19.973	18.617
	6405	91	20.11	22.45	20.85	18.430	20.197	18.493
UNII7	6565	123	20.19	22.14	20.77	18.408	20.076	18.543
	6685	147	20.05	21.96	20.55	18.312	20.229	18.412
	6845	179	20.12	21.94	20.84	18.440	19.709	18.828

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.39	23.37	22.11	18.071	19.788	18.417
	6165	43	20.19	22.51	24.22	18.237	19.831	18.457
	6405	91	20.91	22.32	23.01	18.120	19.792	18.427
UNII7	6565	123	20.08	22.97	22.10	18.221	19.862	18.406
	6685	147	18.77	23.47	25.48	16.830	19.682	18.348
	6845	179	20.48	22.43	22.83	18.098	19.104	18.486

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	31.38	23.45	27.97	18.039	19.238	18.143
	6165	43	21.84	30.24	26.56	18.072	19.214	18.180
	6405	91	23.14	30.08	26.41	18.023	19.302	18.230
UNII7	6565	123	31.22	23.31	26.21	18.112	19.134	18.267
	6685	147	22.00	24.05	26.61	18.088	19.117	18.023
	6845	179	31.56	29.92	27.57	18.086	18.957	18.102

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	35.07	-	35.26	19.514	-	19.703
	6165	43	34.91	-	35.88	19.389	-	19.615
	6405	91	34.87	-	35.87	19.378	-	19.707
UNII7	6565	123	34.77	-	35.92	19.371	-	19.831
	6685	147	34.86	-	35.73	19.421	-	19.780
	6845	179	35.36	-	36.03	19.401	-	20.070

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.54	-	-	38.004	-
	6165	43	-	41.54	-	-	37.975	-
	6405	91	-	41.48	-	-	38.006	-
UNII7	6565	123	-	41.45	-	-	37.972	-
	6685	147	-	41.43	-	-	38.004	-
	6845	179	-	41.42	-	-	37.965	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.34	-	-	37.977	-
	6165	43	-	42.12	-	-	37.985	-
	6405	91	-	41.90	-	-	37.998	-
UNII7	6565	123	-	42.49	-	-	37.953	-
	6685	147	-	42.26	-	-	37.978	-
	6845	179	-	42.31	-	-	37.916	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	23.96	23.57	21.94	20.072	21.681	20.024
	6145	39	23.29	21.46	24.55	19.591	20.780	20.229
	6385	87	21.04	20.69	25.53	19.701	20.208	20.534
UNII7	6625	135	18.56	24.21	22.31	17.134	22.683	20.093
	6705	151	23.33	24.09	25.85	19.721	21.572	20.611
	6785	167	23.48	27.77	24.93	20.017	21.742	20.144

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	25.83	34.31	27.08	19.749	22.480	20.016
	6145	39	26.82	29.96	28.12	20.152	22.177	20.920
	6385	87	27.79	34.00	29.19	20.119	22.163	20.786
UNII7	6625	135	26.47	33.03	23.42	19.967	22.513	20.113
	6705	151	25.64	33.50	25.93	20.084	23.201	20.206
	6785	167	26.88	31.86	27.62	19.774	21.729	20.870

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	29.02	35.62	31.13	19.869	22.643	19.957
	6145	39	25.19	34.45	29.07	19.324	21.954	19.844
	6385	87	29.19	32.64	29.58	19.572	21.878	19.995
UNII7	6625	135	28.69	33.25	28.92	18.910	20.633	20.382
	6705	151	29.87	35.07	29.45	20.791	21.286	19.719
	6785	167	28.91	34.46	29.76	19.945	21.810	20.072

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	44.35	34.25	42.83	22.871	21.891	22.755
	6145	39	32.72	36.70	31.56	22.317	23.807	22.313
	6385	87	32.26	35.29	31.76	22.118	23.019	22.522
UNII7	6625	135	32.30	33.94	33.69	22.235	23.194	22.625
	6705	151	44.50	35.58	32.25	22.759	23.683	22.809
	6785	167	33.60	34.81	32.82	22.348	23.218	22.992

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	69.70	-	72.81	54.593	-	43.688
	6145	39	69.77	-	72.07	53.454	-	43.107
	6385	87	69.29	-	69.20	54.560	-	43.605
UNII7	6625	135	69.63	-	72.41	54.231	-	43.292
	6705	151	69.50	-	72.78	54.319	-	44.066
	6785	167	69.40	-	72.68	52.940	-	44.662

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.44	-	-	77.802	-
	6145	39	-	87.51	-	-	77.805	-
	6385	87	-	87.61	-	-	77.800	-
UNII7	6625	135	-	87.54	-	-	77.758	-
	6705	151	-	87.87	-	-	77.778	-
	6785	167	-	87.84	-	-	77.777	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	88.88	-	-	77.746	-
	6145	39	-	88.74	-	-	77.760	-
	6385	87	-	87.97	-	-	77.731	-
UNII7	6625	135	-	87.35	-	-	77.810	-
	6705	151	-	87.75	-	-	77.781	-
	6785	167	-	87.84	-	-	77.701	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	24.47	24.68	25.80	21.018	24.460	25.580
	6185	47	24.71	24.96	29.65	21.165	23.221	25.964
	6345	79	25.03	24.32	27.52	21.526	23.083	25.281
UNII7	6665	143	23.19	25.02	26.23	21.512	24.041	25.001

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	24.32	30.42	33.80	21.072	24.391	25.943
	6185	47	29.43	31.07	31.76	22.672	25.330	28.286
	6345	79	31.30	35.41	35.31	21.475	26.284	28.145
UNII7	6665	143	30.29	35.94	32.99	22.927	26.879	25.780

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	31.41	37.83	30.43	23.486	24.419	25.327
	6185	47	33.46	39.14	35.06	25.029	25.678	23.681
	6345	79	37.00	36.63	39.78	24.929	26.379	25.952
UNII7	6665	143	35.87	37.53	37.25	25.442	25.749	24.463

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	87.45	43.63	42.69	29.361	27.574	25.776
	6185	47	41.78	45.17	43.15	29.055	27.484	26.301
	6345	79	41.65	43.01	43.11	27.453	27.387	26.008
UNII7	6665	143	39.92	43.97	43.34	28.492	25.776	25.140

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	88.48	-	102.8	46.180	-	48.906
	6185	47	88.52	-	103.7	44.970	-	48.954
	6345	79	88.19	-	107.6	44.206	-	49.481
UNII7	6665	143	86.43	-	72.74	44.782	-	48.106

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	137.1	-	-	80.368	-
	6185	47	-	142.6	-	-	81.062	-
	6345	79	-	144.1	-	-	80.826	-
UNII7	6665	143	-	140.0	-	-	79.798	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	26.18	28.35	26.81	25.057	27.761	22.607
	6185	47	26.84	25.37	25.37	24.798	26.285	22.880
	6345	79	24.07	24.12	23.39	24.821	26.582	22.035
UNII7	6665	143	28.03	27.12	24.85	25.542	27.071	21.709

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	30.95	38.75	30.98	26.644	30.003	24.963
	6185	47	32.49	37.26	27.41	27.782	28.949	24.364
	6345	79	30.86	37.81	28.54	25.087	28.812	23.662
UNII7	6665	143	35.97	32.42	30.18	26.521	30.316	26.428

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	40.95	38.82	33.26	28.098	29.052	25.027
	6185	47	39.32	40.43	31.26	25.745	28.180	24.141
	6345	79	39.38	35.61	36.50	27.558	27.507	23.848
UNII7	6665	143	38.82	32.34	34.63	27.367	28.817	23.014

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	48.91	52.60	42.94	31.156	30.461	27.547
	6185	47	50.02	51.50	43.31	29.788	27.628	28.031
	6345	79	49.71	48.72	42.94	31.990	27.199	26.425
UNII7	6665	143	46.85	49.68	85.80	31.007	28.064	28.946

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	95.38	-	87.42	52.594	-	50.768
	6185	47	93.63	-	87.00	49.350	-	50.665
	6345	79	95.93	-	87.60	55.496	-	48.933
UNII7	6665	143	91.01	-	86.73	50.766	-	51.027

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	133.8	-	-	81.782	-
	6185	47	-	131.0	-	-	80.388	-
	6345	79	-	132.5	-	-	80.353	-
UNII7	6665	143	-	134.2	-	-	81.209	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	170.3	-	-	156.98	-
	6185	47	-	173.1	-	-	156.94	-
	6345	79	-	174.7	-	-	157.26	-
UNII7	6665	143	-	170.7	-	-	156.91	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	172.3	-	-	156.70	-
	6185	47	-	172.6	-	-	156.71	-
	6345	79	-	173.9	-	-	156.88	-
UNII7	6665	143	-	172.9	-	-	156.77	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	167.4	41.90	100.9	159.61	34.985	38.618
	6265	63	170.0	134.2	105.5	147.51	38.646	37.917

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	33.86	42.94	108.9	31.450	36.177	54.316
	6265	63	34.22	37.51	110.6	37.395	34.014	42.257

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	46.55	51.43	107.1	37.453	35.452	35.687
	6265	63	48.06	136.5	107.0	37.585	55.715	41.428

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	171.9	162.1	133.4	77.334	148.10	111.72
	6265	63	171.9	166.3	125.5	159.90	147.78	108.46

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	177.2	-	148.4	161.50	-	128.60
	6265	63	178.6	-	148.9	163.24	-	125.61

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	170.0	-	-	106.81	-
	6265	63	-	171.7	-	-	116.61	-
Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	98.54	42.39	39.81	89.966	39.699	39.749
	6265	63	39.55	31.96	39.39	35.355	35.038	38.884
Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	42.68	44.71	41.77	35.500	40.271	41.654
	6265	63	42.05	43.19	45.95	39.470	37.604	40.026
Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	106.2	64.97	44.37	43.067	54.298	37.478
	6265	63	103.6	60.16	46.98	41.205	51.766	39.159
Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	110.8	87.27	71.42	93.085	68.439	43.852
	6265	63	107.6	83.22	62.63	76.094	48.781	40.237
Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	122.6	-	151.7	98.558	-	85.294
	6265	63	122.9	-	146.5	99.609	-	88.683
Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	173.5	-	-	106.20	-
	6265	63	-	178.2	-	-	103.96	-

Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	34.05	53.83	88.61	37.027	36.384	32.136
	6265	63	41.24	61.59	89.96	37.133	46.775	38.478
Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	43.41	48.32	97.02	38.591	40.703	40.921
	6265	63	45.33	42.19	95.26	41.025	36.436	55.173
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	54.47	65.41	96.38	40.859	46.500	38.584
	6265	63	53.87	73.19	98.43	41.432	60.998	41.845
Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	75.03	69.82	112.1	46.619	48.237	92.146
	6265	63	73.30	66.02	106.3	48.767	51.108	90.860
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	101.1	-	102.4	77.343	-	91.002
	6265	63	104.5	-	107.0	76.826	-	93.128
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	183.2	-	-	95.610	-
	6265	63	-	183.8	-	-	96.588	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	108.9	150.2	163.9	46.739	46.088	40.516
	6265	63	108.6	140.6	169.3	100.51	36.316	51.672

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	40.83	61.69	35.93	36.565	48.071	41.016
	6265	63	36.34	41.27	162.2	38.514	36.645	37.166
Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	113.4	155.7	167.5	66.719	143.26	40.709
	6265	63	110.1	150.8	39.14	53.502	141.22	32.806
Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	128.2	140.7	178.1	105.97	123.42	162.57
	6265	63	131.0	141.6	176.1	111.05	128.62	162.13
Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	151.2	-	174.3	122.54	-	163.24
	6265	63	151.3	-	179.5	124.92	-	163.02
Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	173.5	-	-	108.29	-
	6265	63	-	173.7	-	-	103.64	-
Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	268.5	-	-	196.74	-
	6265	63	-	265.6	-	-	203.26	-
Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	290.5	-	-	230.07	-
	6265	63	-	288.5	-	-	228.86	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	330.5	-	-	314.73	-
	6265	63	-	329.9	-	-	314.99	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	331.7	-	-	315.04	-
	6265	63	-	333.7	-	-	315.01	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.89	-	-	16.570	-
	6175	45	-	20.61	-	-	16.566	-
	6415	93	-	20.64	-	-	16.538	-
UNII7	6535	117	-	20.92	-	-	16.555	-
	6695	149	-	20.89	-	-	16.544	-
	6855	181	-	20.77	-	-	16.548	-

10.2.2.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.26	17.94	19.48	18.254	16.518	17.818
	6175	45	19.51	17.97	19.58	18.223	16.515	18.237
	6415	93	19.34	18.08	19.46	18.244	16.544	18.158
UNII7	6535	117	19.50	18.05	19.43	18.123	17.050	18.144
	6695	149	19.48	17.90	18.79	18.183	16.957	17.585
	6855	181	19.48	18.03	19.67	18.115	16.904	18.075

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.48	18.54	19.54	17.873	17.060	18.110
	6175	45	19.66	18.54	19.53	18.083	16.822	18.116
	6415	93	19.64	17.33	19.57	18.183	16.316	18.126
UNII7	6535	117	19.61	18.11	19.71	17.650	17.148	18.044
	6695	149	19.67	17.98	19.61	18.189	16.875	17.962
	6855	181	19.66	18.43	19.67	18.203	17.103	18.034

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.67	-	20.13	18.208	-	18.128
	6175	45	19.63	-	20.21	18.181	-	18.186
	6415	93	19.51	-	20.29	18.128	-	17.833
UNII7	6535	117	19.60	-	20.25	18.090	-	18.185
	6695	149	19.60	-	20.25	18.192	-	18.121
	6855	181	19.58	-	20.13	18.177	-	18.029

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.01	-	-	19.038	-
	6175	45	-	21.29	-	-	19.067	-
	6415	93	-	20.94	-	-	19.028	-
UNII7	6535	117	-	20.99	-	-	19.033	-
	6695	149	-	20.96	-	-	19.037	-
	6855	181	-	21.04	-	-	19.040	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.27	-	-	19.018	-
	6175	45	-	21.70	-	-	19.031	-
	6415	93	-	21.49	-	-	19.048	-
UNII7	6535	117	-	21.53	-	-	19.027	-
	6695	149	-	21.34	-	-	19.031	-
	6855	181	-	21.36	-	-	19.058	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.22	22.51	20.08	79.173	19.838	18.384
	6165	43	19.79	22.18	20.32	18.346	20.091	18.423
	6405	91	19.70	21.64	19.96	18.496	19.977	18.506
UNII7	6565	123	20.05	21.84	20.49	18.316	19.172	18.362
	6685	147	20.10	21.57	20.58	18.335	20.098	18.581
	6845	179	19.98	21.38	20.47	18.340	19.833	18.492

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.18	22.87	23.97	18.186	19.897	18.240
	6165	43	20.52	22.87	22.32	18.204	19.694	18.314
	6405	91	20.35	23.22	22.71	17.626	20.096	18.242
UNII7	6565	123	20.27	22.78	25.41	18.317	19.863	18.428
	6685	147	20.40	22.37	21.81	18.244	19.892	18.297
	6845	179	20.47	22.25	23.96	18.176	19.525	18.410

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	31.38	30.58	27.61	18.130	19.250	18.190
	6165	43	31.19	30.71	27.70	18.034	19.217	18.279
	6405	91	23.14	29.98	24.91	18.002	19.273	18.062
UNII7	6565	123	23.46	30.49	26.62	17.933	19.208	18.141
	6685	147	23.29	29.93	26.45	18.020	19.195	18.146
	6845	179	31.31	30.60	26.47	17.939	19.143	18.151

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.82	-	35.87	19.451	-	19.868
	6165	43	35.08	-	36.03	19.389	-	19.658
	6405	91	34.78	-	36.33	19.446	-	20.042
UNII7	6565	123	34.80	-	36.15	19.385	-	19.936
	6685	147	34.82	-	35.99	19.488	-	19.671
	6845	179	34.74	-	36.09	19.471	-	20.122

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.71	-	-	38.022	-
	6165	43	-	41.43	-	-	37.924	-
	6405	91	-	41.62	-	-	38.009	-
UNII7	6565	123	-	41.39	-	-	37.988	-
	6685	147	-	41.60	-	-	37.996	-
	6845	179	-	41.48	-	-	38.008	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.81	-	-	37.981	-
	6165	43	-	42.53	-	-	37.963	-
	6405	91	-	42.19	-	-	37.973	-
UNII7	6565	123	-	41.82	-	-	38.004	-
	6685	147	-	42.54	-	-	37.996	-
	6845	179	-	42.38	-	-	37.938	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	20.84	26.47	24.58	19.765	21.579	20.238
	6145	39	22.65	26.98	25.46	19.619	21.590	20.941
	6385	87	21.02	23.63	27.88	19.692	21.106	20.297
UNII7	6625	135	21.85	25.25	24.29	20.059	21.444	20.042
	6705	151	20.25	24.41	26.81	19.120	21.010	20.679
	6785	167	21.25	26.94	21.33	18.765	21.869	19.442

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	26.28	28.46	27.71	20.250	20.621	20.230
	6145	39	29.46	32.32	28.66	20.280	21.216	20.373
	6385	87	28.58	33.98	24.31	20.480	23.103	20.002
UNII7	6625	135	26.10	33.81	27.00	19.641	22.721	20.204
	6705	151	27.23	31.56	29.26	19.881	21.891	20.313
	6785	167	29.17	31.71	27.01	20.020	22.790	20.616

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	28.59	37.15	29.71	19.680	22.236	20.211
	6145	39	28.87	35.61	26.61	19.334	21.094	19.929
	6385	87	29.39	32.90	27.35	19.899	20.837	19.657
UNII7	6625	135	29.69	34.60	26.50	20.036	21.583	19.927
	6705	151	28.72	34.67	28.34	19.159	21.976	19.437
	6785	167	28.42	32.01	28.16	19.793	21.432	20.340

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	32.99	34.26	31.42	22.584	22.233	22.030
	6145	39	32.61	36.10	31.13	22.288	22.950	22.386
	6385	87	32.71	35.12	31.82	22.201	23.236	22.635
UNII7	6625	135	33.37	35.01	32.25	22.233	23.885	22.477
	6705	151	32.32	36.11	32.61	22.505	22.654	23.162
	6785	167	33.49	35.62	33.31	22.403	23.677	22.810

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	69.37	-	71.64	53.654	-	43.174
	6145	39	69.72	-	72.89	54.095	-	43.997
	6385	87	69.22	-	70.34	53.856	-	43.782
UNII7	6625	135	69.49	-	71.83	53.091	-	43.775
	6705	151	69.24	-	71.58	54.396	-	43.290
	6785	167	69.46	-	71.45	54.252	-	43.400

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	86.40	-	-	77.679	-
	6145	39	-	87.34	-	-	77.679	-
	6385	87	-	86.14	-	-	77.666	-
UNII7	6625	135	-	86.13	-	-	77.649	-
	6705	151	-	86.29	-	-	77.653	-
	6785	167	-	85.90	-	-	77.646	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	86.74	-	-	77.701	-
	6145	39	-	87.86	-	-	77.686	-
	6385	87	-	87.33	-	-	77.731	-
UNII7	6625	135	-	88.35	-	-	77.801	-
	6705	151	-	87.79	-	-	77.766	-
	6785	167	-	87.51	-	-	77.660	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	17.00	24.96	29.99	20.496	23.803	26.721
	6185	47	25.84	25.88	24.05	22.398	24.160	24.514
	6345	79	24.97	28.86	24.85	21.179	24.383	25.195
UNII7	6665	143	25.58	26.39	28.42	21.809	24.217	25.233

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	28.79	37.24	31.42	23.418	26.287	26.902
	6185	47	28.95	30.69	35.44	22.042	24.272	27.093
	6345	79	29.45	39.72	31.02	22.025	27.636	25.791
UNII7	6665	143	25.67	31.29	24.95	23.216	25.862	23.675

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	34.93	39.87	38.76	24.522	24.063	24.389
	6185	47	37.63	39.92	30.75	24.679	25.648	23.476
	6345	79	36.87	34.93	38.24	23.095	24.154	25.436
UNII7	6665	143	35.37	41.00	30.10	26.355	25.147	23.741

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	44.05	44.39	43.95	29.059	27.359	25.533
	6185	47	43.40	45.79	42.60	29.081	27.469	25.733
	6345	79	42.63	43.05	42.40	27.362	27.298	25.481
UNII7	6665	143	43.19	45.14	42.78	29.509	27.253	25.442

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.65	-	73.23	42.838	-	48.375
	6185	47	87.68	-	107.9	47.274	-	49.641
	6345	79	88.69	-	107.6	44.584	-	49.066
UNII7	6665	143	88.33	-	106.4	45.346	-	49.329

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	137.2	-	-	80.463	-
	6185	47	-	140.9	-	-	81.152	-
	6345	79	-	141.5	-	-	80.666	-
UNII7	6665	143	-	137.7	-	-	80.728	-

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	26.25	27.48	24.30	24.374	28.025	22.350
	6185	47	24.61	25.73	28.77	24.043	26.278	21.792
	6345	79	26.59	27.29	25.99	25.319	26.924	23.496
UNII7	6665	143	18.06	27.43	25.88	18.754	26.277	21.808

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	33.32	38.31	32.04	27.787	31.299	24.552
	6185	47	33.66	29.34	25.55	26.348	24.836	23.696
	6345	79	34.50	37.26	31.02	27.648	29.423	24.308
UNII7	6665	143	33.31	35.56	25.17	26.584	31.284	21.983

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	40.16	40.44	33.02	27.446	29.430	24.328
	6185	47	38.45	40.45	29.31	26.726	27.991	23.753
	6345	79	33.31	41.42	33.27	25.610	28.633	23.805
UNII7	6665	143	36.87	36.43	34.48	26.331	27.621	22.765

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	50.10	51.61	43.59	31.299	30.747	28.054
	6185	47	48.91	50.75	42.98	29.943	27.851	28.280
	6345	79	52.51	52.61	43.30	31.554	30.185	26.723
UNII7	6665	143	49.98	48.79	42.62	30.703	28.192	28.324

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	95.85	-	86.82	52.461	-	52.207
	6185	47	95.24	-	86.32	51.002	-	49.978
	6345	79	96.58	-	87.19	55.209	-	49.177
UNII7	6665	143	92.92	-	87.58	54.066	-	49.606

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	134.8	-	-	81.972	-
	6185	47	-	128.1	-	-	80.217	-
	6345	79	-	133.5	-	-	80.925	-
UNII7	6665	143	-	134.8	-	-	81.693	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	172.8	-	-	157.15	-
	6185	47	-	175.8	-	-	156.99	-
	6345	79	-	173.4	-	-	157.33	-
UNII7	6665	143	-	174.1	-	-	157.15	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	174.5	-	-	156.58	-
	6185	47	-	174.4	-	-	156.61	-
	6345	79	-	173.7	-	-	156.80	-
UNII7	6665	143	-	174.0	-	-	156.62	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	170.3	41.93	31.88	35.655	36.284	34.746
	6265	63	163.7	134.7	104.0	77.919	34.495	40.527

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	27.56	48.05	104.9	34.184	36.053	43.118
	6265	63	27.50	37.29	103.6	34.806	36.585	65.097
Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	167.8	52.85	114.3	47.069	39.102	38.387
	6265	63	172.1	132.2	55.74	69.452	71.007	36.246
Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	173.6	164.4	131.3	87.723	147.20	112.28
	6265	63	172.0	164.5	128.7	102.93	149.24	110.76
Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	173.5	-	149.6	161.89	-	128.22
	6265	63	180.3	-	152.1	163.63	-	126.39
Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.2	-	-	102.14	-
	6265	63	-	172.3	-	-	105.82	-
			-		-	-		-
Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	39.07	43.22	38.15	633.73	37.798	37.001
	6265	63	37.10	51.66	42.10	33.658	34.479	38.788
Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	48.15	42.85	41.61	37.095	38.355	42.532
	6265	63	49.78	45.75	46.64	38.751	44.146	42.881

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.8	69.73	45.03	76.440	54.402	36.000
	6265	63	101.0	65.97	45.95	47.408	53.786	37.616
Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	113.1	87.83	66.53	90.248	67.450	39.332
	6265	63	112.9	88.95	65.75	89.504	68.238	38.997
Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	126.7	-	119.7	98.585	-	88.831
	6265	63	120.8	-	119.8	99.295	-	86.365
Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	170.2	-	-	104.17	-
	6265	63	-	172.3	-	-	101.82	-
Mode : EHT320(80MH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	39.19	69.65	89.28	37.481	41.340	40.014
	6265	63	44.25	35.78	94.96	37.523	37.664	42.056
Mode : EHT320(80MH) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	43.90	46.57	95.06	41.466	38.652	92.791
	6265	63	40.85	39.88	42.74	38.503	37.714	39.699
Mode : EHT320(80MH) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	50.96	77.08	97.60	39.756	62.093	43.192
	6265	63	55.06	72.12	94.90	41.703	64.107	41.828

Mode : EHT320(80MH) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	73.72	62.94	106.4	45.102	51.364	91.996
	6265	63	85.88	68.71	107.2	50.640	50.914	88.162
Mode : EHT320(80MH) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	97.18	-	106.6	72.803	-	90.423
	6265	63	104.9	-	105.5	73.941	-	92.650
Mode : EHT320(80MH) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	183.1	-	-	97.763	-
	6265	63	-	181.3	-	-	96.498	-
Mode : EHT320(80HH) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	106.4	146.4	167.7	99.103	47.162	54.479
	6265	63	105.4	38.55	166.4	100.82	38.176	40.933
Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	41.59	41.90	171.5	40.966	41.419	164.82
	6265	63	46.11	57.84	169.4	42.639	44.154	164.29
Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	114.4	157.4	169.2	43.335	138.28	39.879
	6265	63	59.11	151.8	170.4	41.878	142.32	36.832
Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	126.6	137.7	167.5	74.373	120.59	160.23
	6265	63	127.3	143.1	175.4	111.12	126.50	163.32

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	151.5	-	178.1	122.98	-	161.22
	6265	63	157.6	-	180.0	127.37	-	162.86
Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	172.7	-	-	108.70	-
	6265	63	-	173.9	-	-	106.93	-
Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	267.1	-	-	180.93	-
	6265	63	-	264.5	-	-	212.83	-
Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	291.2	-	-	221.83	-
	6265	63	-	290.8	-	-	229.35	-
Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	330.8	-	-	314.44	-
	6265	63	-	331.7	-	-	314.56	-
Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	332.9	-	-	315.25	-
	6265	63	-	333.7	-	-	314.94	-
Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.93	-	-	16.553	-
	6175	45	-	20.72	-	-	16.530	-
	6415	93	-	20.82	-	-	16.560	-
UNII7	6535	117	-	20.89	-	-	16.535	-
	6695	149	-	20.78	-	-	16.552	-
	6855	181	-	20.90	-	-	16.553	-

10.2.3 26 dB BANDWIDTH(Very Low Power Device)

10.2.3.1 Ant1

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.25	17.98	19.63	18.179	17.010	18.172
	6175	45	19.22	18.11	19.62	18.205	16.422	18.265
	6415	93	19.45	18.02	19.47	18.266	17.039	18.067
UNII7	6535	117	19.48	18.02	19.44	18.105	16.919	18.230
	6695	149	19.39	17.90	19.58	18.044	16.287	17.747
	6855	181	18.91	17.92	19.44	17.740	16.604	18.270

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.33	18.56	19.16	17.648	16.912	17.770
	6175	45	19.68	18.60	19.56	18.210	17.013	18.065
	6415	93	19.48	18.10	19.72	18.076	17.154	17.781
UNII7	6535	117	19.56	18.35	19.61	17.966	17.042	18.051
	6695	149	19.64	18.59	19.48	18.113	17.018	17.848
	6855	181	19.70	18.57	19.40	18.148	16.946	18.043

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	19.61	-	20.06	18.153	-	18.192
	6175	45	19.64	-	20.23	18.172	-	18.145
	6415	93	19.61	-	20.22	18.163	-	18.068
UNII7	6535	117	19.56	-	20.15	17.917	-	17.997
	6695	149	19.64	-	20.21	18.229	-	18.122
	6855	181	19.56	-	20.05	18.139	-	18.207

Mode : EHT20 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	20.89	-	-	19.036	-
	6175	45	-	21.26	-	-	19.054	-
	6415	93	-	20.97	-	-	19.035	-
UNII7	6535	117	-	21.17	-	-	19.046	-
	6695	149	-	20.96	-	-	19.037	-
	6855	181	-	20.88	-	-	19.036	-

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5935	2	-	21.36	-	-	19.009	-
	6175	45	-	21.52	-	-	19.036	-
	6415	93	-	21.35	-	-	19.000	-
UNII7	6535	117	-	21.57	-	-	19.021	-
	6695	149	-	21.75	-	-	19.031	-
	6855	181	-	21.75	-	-	19.026	-

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.18	21.95	20.57	18.475	20.297	18.371
	6165	43	19.49	21.28	20.43	17.914	19.709	18.407
	6405	91	19.83	22.07	21.38	18.344	20.291	18.613
UNII7	6565	123	20.05	21.83	20.69	18.349	20.164	18.432
	6685	147	20.54	21.81	20.34	18.541	19.951	18.516
	6845	179	20.24	22.04	20.26	18.490	19.480	18.166

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	20.10	22.76	23.91	18.116	19.820	18.344
	6165	43	20.63	22.60	22.77	18.223	19.584	18.457
	6405	91	20.64	23.59	23.00	18.096	19.898	18.397
UNII7	6565	123	20.91	23.22	24.40	18.113	20.047	18.443
	6685	147	18.01	22.95	24.24	16.036	19.865	18.410
	6845	179	19.86	23.51	22.61	17.854	20.011	18.419

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	31.77	30.51	26.25	17.965	19.452	18.311
	6165	43	23.32	30.42	25.05	18.038	19.321	18.112
	6405	91	23.30	30.77	25.12	18.104	19.311	18.189
UNII7	6565	123	21.90	30.08	26.62	18.074	19.400	18.161
	6685	147	23.35	23.82	27.65	17.839	19.208	18.219
	6845	179	31.20	30.50	27.45	18.038	19.244	18.236

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	35.24	-	35.86	19.544	-	19.680
	6165	43	34.86	-	35.74	19.381	-	19.503
	6405	91	34.86	-	35.95	19.413	-	19.575
UNII7	6565	123	34.74	-	35.75	19.424	-	19.945
	6685	147	34.62	-	35.83	19.399	-	19.824
	6845	179	35.32	-	35.94	19.424	-	20.283

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	41.39	-	-	38.006	-
	6165	43	-	41.49	-	-	37.990	-
	6405	91	-	41.58	-	-	38.000	-
UNII7	6565	123	-	41.49	-	-	37.987	-
	6685	147	-	41.52	-	-	38.018	-
	6845	179	-	41.41	-	-	37.983	-

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5965	3	-	42.27	-	-	37.971	-
	6165	43	-	42.74	-	-	37.942	-
	6405	91	-	43.09	-	-	37.930	-
UNII7	6565	123	-	43.00	-	-	37.979	-
	6685	147	-	42.49	-	-	37.929	-
	6845	179	-	42.15	-	-	37.960	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	23.45	22.22	25.18	19.255	21.767	20.549
	6145	39	21.58	26.35	25.85	19.896	21.474	20.226
	6385	87	20.78	24.49	23.00	19.773	21.128	20.482
UNII7	6625	135	22.81	24.04	25.72	19.985	21.769	20.109
	6705	151	23.42	21.09	25.09	19.686	20.193	20.120
	6785	167	25.70	24.59	25.39	20.265	21.500	20.561

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	24.64	34.63	27.54	19.931	23.269	19.975
	6145	39	24.65	31.65	27.60	19.851	22.947	20.385
	6385	87	29.16	29.69	28.48	20.719	22.186	20.294
UNII7	6625	135	27.96	32.50	27.94	19.937	21.734	19.886
	6705	151	24.28	31.42	28.76	19.954	22.993	20.361
	6785	167	26.10	30.83	26.35	20.347	22.879	20.885

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	29.09	34.75	28.14	19.274	22.338	20.947
	6145	39	28.46	33.54	43.00	19.797	21.061	20.443
	6385	87	27.05	34.89	42.59	19.906	21.046	20.186
UNII7	6625	135	29.36	35.11	28.45	19.031	21.765	20.428
	6705	151	43.05	34.44	29.29	19.328	21.248	20.826
	6785	167	28.28	31.80	27.36	20.397	21.463	20.015

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	33.14	36.37	30.67	22.755	22.712	22.554
	6145	39	44.39	36.59	31.87	22.777	23.685	22.311
	6385	87	44.43	34.78	31.41	22.126	22.541	22.213
UNII7	6625	135	44.43	34.96	32.89	22.359	23.167	22.859
	6705	151	44.97	35.26	33.41	22.444	23.152	23.042
	6785	167	44.90	35.62	33.33	22.704	23.288	23.009

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	69.50	-	71.63	54.184	-	42.857
	6145	39	69.41	-	71.20	54.085	-	43.419
	6385	87	69.13	-	68.39	53.340	-	42.968
UNII7	6625	135	69.81	-	72.68	53.321	-	44.767
	6705	151	69.47	-	72.79	53.110	-	43.760
	6785	167	69.66	-	72.47	53.636	-	44.667

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.43	-	-	77.646	-
	6145	39	-	87.06	-	-	77.704	-
	6385	87	-	85.85	-	-	77.715	-
UNII7	6625	135	-	87.09	-	-	77.704	-
	6705	151	-	87.07	-	-	77.640	-
	6785	167	-	86.55	-	-	77.677	-

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	5985	7	-	87.75	-	-	77.786	-
	6145	39	-	86.61	-	-	77.777	-
	6385	87	-	87.81	-	-	77.718	-
UNII7	6625	135	-	87.62	-	-	77.668	-
	6705	151	-	86.58	-	-	77.841	-
	6785	167	-	87.84	-	-	77.768	-

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	28.61	30.64	27.32	24.226	26.164	25.785
	6185	47	24.91	24.44	26.94	22.173	23.530	26.608
	6345	79	25.28	25.37	26.16	22.819	25.710	26.454
UNII7	6665	143	16.95	28.52	28.41	27.724	25.844	24.528

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	30.11	34.55	32.41	22.095	25.727	27.545
	6185	47	28.98	33.94	35.02	23.184	26.948	27.530
	6345	79	27.81	30.03	29.25	21.424	25.833	27.272
UNII7	6665	143	30.45	35.27	35.12	24.241	28.699	27.954

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	87.14	52.07	36.22	24.655	26.597	25.521
	6185	47	86.74	38.11	35.59	26.760	26.993	25.619
	6345	79	30.37	52.59	38.46	25.614	26.260	25.239
UNII7	6665	143	36.99	38.28	39.11	25.611	25.470	25.315

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	88.18	46.67	44.05	30.085	28.764	26.366
	6185	47	43.36	72.99	43.69	30.678	28.788	26.403
	6345	79	42.40	45.27	43.87	28.777	27.464	26.435
UNII7	6665	143	40.58	72.42	44.18	30.327	27.749	25.902

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	88.46	-	106.4	44.077	-	47.453
	6185	47	89.02	-	109.1	44.962	-	49.095
	6345	79	88.59	-	108.9	45.573	-	48.977
UNII7	6665	143	87.54	-	107.0	45.737	-	47.886

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	135.4	-	-	80.096	-
	6185	47	-	138.2	-	-	80.353	-
	6345	79	-	135.6	-	-	80.498	-
UNII7	6665	143	-	133.8	-	-	79.903	-

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	25.80	28.87	24.02	25.160	31.924	26.401
	6185	47	28.16	25.58	22.74	25.171	28.844	21.499
	6345	79	26.89	26.80	24.98	27.309	28.524	24.854
UNII7	6665	143	25.13	17.81	28.23	25.361	25.702	25.930

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	36.90	36.94	30.43	26.896	30.413	26.011
	6185	47	32.24	34.87	28.19	26.784	31.586	24.717
	6345	79	31.15	32.74	25.42	26.340	28.896	21.985
UNII7	6665	143	31.83	36.11	32.02	28.138	30.824	26.900

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	38.16	36.08	87.25	26.308	29.601	25.921
	6185	47	41.99	32.41	32.99	25.462	27.277	24.429
	6345	79	37.74	36.31	34.69	25.259	27.768	25.613
UNII7	6665	143	36.02	60.10	86.76	28.524	29.014	25.533

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	50.41	49.17	85.80	30.766	30.052	27.980
	6185	47	49.80	48.16	85.54	31.019	27.899	28.405
	6345	79	49.15	45.62	42.75	30.633	27.849	27.256
UNII7	6665	143	50.35	51.44	86.59	32.628	29.193	29.667

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	95.95	-	87.88	52.287	-	52.095
	6185	47	96.08	-	85.43	52.426	-	49.751
	6345	79	104.7	-	87.81	55.668	-	49.781
UNII7	6665	143	93.94	-	87.34	55.935	-	51.944

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	126.5	-	-	82.046	-
	6185	47	-	126.5	-	-	79.951	-
	6345	79	-	123.3	-	-	80.686	-
UNII7	6665	143	-	128.1	-	-	80.880	-

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	172.1	-	-	157.01	-
	6185	47	-	170.7	-	-	157.01	-
	6345	79	-	174.1	-	-	157.10	-
UNII7	6665	143	-	175.0	-	-	156.89	-

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6025	15	-	174.1	-	-	157.31	-
	6185	47	-	172.9	-	-	157.05	-
	6345	79	-	175.8	-	-	157.47	-
UNII7	6665	143	-	174.4	-	-	157.05	-

Mode : EHT320(80LL) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	34.65	137.0	35.53	48.119	92.140	46.226
	6265	63	167.2	33.52	99.92	164.72	44.185	57.435

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	36.67	39.22	101.0	47.517	34.685	55.778
	6265	63	38.79	36.76	46.98	48.067	44.551	43.308

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	166.6	140.2	45.79	68.674	82.846	39.265
	6265	63	167.9	144.2	110.7	56.603	128.51	43.084

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	174.4	165.4	131.7	161.24	147.25	112.71
	6265	63	170.5	160.3	129.2	160.21	147.40	110.25

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	176.8	-	149.5	162.77	-	127.39
	6265	63	178.6	-	153.1	162.67	-	129.20

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	171.2	-	-	104.26	-
	6265	63	-	172.0	-	-	110.50	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	84.56	56.15	42.16	55.006	52.770	45.087
	6265	63	93.56	35.29	37.33	92.436	40.670	43.113

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	40.23	43.07	40.70	36.080	40.925	45.607
	6265	63	46.40	39.47	42.11	45.341	38.558	44.454

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	98.02	60.03	42.56	77.014	44.899	39.480
	6265	63	103.0	61.29	46.88	66.551	53.720	41.232

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	113.5	91.66	66.17	88.958	69.957	43.926
	6265	63	106.4	83.41	65.62	79.589	69.496	40.031

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	120.9	-	153.8	101.56	-	94.104
	6265	63	121.4	-	151.9	100.38	-	87.118

Mode : EHT320(80LM) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	172.7	-	-	104.79	-
	6265	63	-	173.7	-	-	102.60	-

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	38.60	39.37	33.95	41.314	46.131	43.521
	6265	63	37.63	37.83	92.95	42.221	47.305	66.103

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	44.19	43.17	43.91	41.755	41.035	43.057
	6265	63	45.28	38.59	91.31	43.588	40.418	90.270

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	54.87	74.43	95.86	45.003	63.014	44.014
	6265	63	53.12	75.55	92.21	41.383	66.343	44.694

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	75.08	67.47	108.9	49.155	49.718	91.032
	6265	63	81.98	67.00	107.9	48.202	52.573	86.934

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	101.8	-	105.9	74.605	-	92.125
	6265	63	107.6	-	106.8	76.805	-	91.801

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	178.2	-	-	97.188	-
	6265	63	-	179.0	-	-	94.990	-

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	102.7	149.9	34.37	87.035	70.442	63.842
	6265	63	28.39	34.30	167.1	47.061	58.986	121.12

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	47.02	48.48	169.4	45.853	45.206	156.63
	6265	63	44.47	52.73	166.2	51.062	57.143	104.83

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	108.5	154.6	40.79	41.844	137.00	42.406
	6265	63	109.8	155.1	36.01	100.44	138.54	41.018

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	125.4	138.0	177.3	82.881	125.77	164.03
	6265	63	131.3	136.7	174.6	107.87	124.67	165.22

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	148.8		179.4	123.95		163.38
	6265	63	158.9		180.6	123.79		162.40

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	171.8	-	-	102.63	-
	6265	63	-	174.6	-	-	106.16	-

Mode : EHT320(160L) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	267.9	-	-	209.83	-
	6265	63	-	266.1	-	-	212.10	-

Mode : EHT320(160U) 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	290.8	-	-	225.08	-
	6265	63	-	291.3	-	-	229.30	-

Mode : EHT320 4x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	329.6	-	-	314.46	-
	6265	63	-	329.1	-	-	314.63	-

Mode : EHT320 SU

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
UNII5	6105	31	-	332.9	-	-	315.11	-
	6265	63	-	331.0	-	-	314.75	-

Mode : 802.11a

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.75	-	-	16.526	-
	6175	45	-	20.78	-	-	16.566	-
	6415	93	-	20.61	-	-	16.571	-
UNII7	6535	117	-	20.79	-	-	16.555	-
	6695	149	-	20.68	-	-	16.566	-
	6855	181	-	20.84	-	-	16.555	-

10.2.3.2 Ant2

Mode : EHT20 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	18.33	18.05	19.55	17.026	16.856	18.230
	6175	45	19.27	17.91	19.80	18.216	16.881	18.327
	6415	93	19.35	17.93	19.69	18.001	16.867	18.268
UNII7	6535	117	19.41	17.95	19.51	18.143	16.957	18.126
	6695	149	19.34	17.74	19.68	18.247	16.645	18.265
	6855	181	19.41	17.74	19.48	18.222	16.811	17.814

Mode : EHT20 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.55	18.38	19.59	18.015	17.078	17.736
	6175	45	19.63	18.54	19.71	18.112	17.013	18.051
	6415	93	19.73	18.66	19.57	17.572	17.111	18.016
UNII7	6535	117	19.58	17.97	19.56	18.152	16.511	18.051
	6695	149	19.66	18.08	19.65	18.128	16.951	18.081
	6855	181	19.75	18.64	19.55	18.215	17.168	18.013

Mode : EHT20 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	19.66	-	20.12	18.182	-	18.200
	6175	45	19.61	-	20.03	18.215	-	18.011
	6415	93	19.59	-	20.27	18.191	-	18.142
UNII7	6535	117	19.64	-	20.28	18.158	-	18.216
	6695	149	19.62	-	20.09	18.139	-	18.162
	6855	181	19.16	-	20.14	17.720	-	18.081

Mode : EHT20 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.89	-	-	19.037	-
	6175	45	-	21.24	-	-	19.070	-
	6415	93	-	20.98	-	-	19.024	-
UNII7	6535	117	-	20.91	-	-	19.026	-
	6695	149	-	20.94	-	-	19.036	-
	6855	181	-	21.02	-	-	19.042	-

Mode : EHT20 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	21.41	-	-	19.005	-
	6175	45	-	21.40	-	-	19.044	-
	6415	93	-	21.53	-	-	19.035	-
UNII7	6535	117	-	21.54	-	-	19.014	-
	6695	149	-	21.62	-	-	19.017	-
	6855	181	-	21.51	-	-	19.006	-

Mode : EHT40 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	19.20	22.22	20.87	18.011	20.312	18.352
	6165	43	20.65	22.07	20.69	17.676	19.338	18.672
	6405	91	20.15	22.06	20.80	18.397	20.317	18.226
UNII7	6565	123	20.43	21.70	19.85	18.462	20.136	18.464
	6685	147	19.94	21.90	20.35	18.419	20.213	18.681
	6845	179	20.35	21.15	19.97	18.441	19.950	18.494

Mode : EHT40 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	20.39	22.35	22.30	18.116	19.581	17.594
	6165	43	20.89	23.19	22.85	18.233	19.788	18.372
	6405	91	20.30	22.80	24.01	18.190	19.796	18.378
UNII7	6565	123	20.76	23.37	21.70	18.001	19.938	18.408
	6685	147	21.08	23.45	24.11	18.196	19.909	18.403
	6845	179	20.46	22.71	25.24	18.293	19.966	18.397

Mode : EHT40 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	31.34	29.95	26.77	18.023	19.258	18.193
	6165	43	31.28	23.50	26.47	17.992	18.840	18.257
	6405	91	23.32	30.51	26.43	18.091	19.256	18.157
UNII7	6565	123	23.40	30.72	26.40	18.018	19.305	17.965
	6685	147	31.37	30.22	26.28	18.020	19.264	18.273
	6845	179	31.56	30.61	26.24	18.086	19.272	18.142

Mode : EHT40 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	34.86	-	35.80	19.439	-	19.696
	6165	43	34.78	-	35.83	19.392	-	19.751
	6405	91	34.80	-	35.48	19.448	-	19.633
UNII7	6565	123	34.90	-	36.02	19.402	-	19.676
	6685	147	34.79	-	35.75	19.421	-	19.901
	6845	179	35.54	-	35.85	19.438	-	19.699

Mode : EHT40 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	41.42	-	-	37.979	-
	6165	43	-	41.69	-	-	38.010	-
	6405	91	-	41.55	-	-	37.994	-
UNII7	6565	123	-	41.61	-	-	37.969	-
	6685	147	-	41.51	-	-	37.997	-
	6845	179	-	41.54	-	-	37.978	-

Mode : EHT40 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5965	3	-	42.22	-	-	37.956	-
	6165	43	-	42.48	-	-	37.920	-
	6405	91	-	42.18	-	-	37.933	-
UNII7	6565	123	-	42.05	-	-	37.954	-
	6685	147	-	41.94	-	-	37.946	-
	6845	179	-	42.54	-	-	37.974	-

Mode : EHT80 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	22.44	24.17	24.47	20.913	22.123	21.122
	6145	39	20.30	26.42	25.37	19.180	22.192	20.409
	6385	87	23.31	21.26	25.96	19.909	20.706	20.275
UNII7	6625	135	23.72	24.10	24.92	19.348	22.110	20.649
	6705	151	25.51	26.31	25.47	20.607	22.004	20.333
	6785	167	21.78	26.78	24.85	19.914	22.369	20.501

Mode : EHT80 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	25.59	31.94	26.93	19.894	22.124	20.530
	6145	39	24.14	31.35	26.88	19.829	22.234	20.290
	6385	87	28.57	32.86	29.05	19.403	23.525	20.957
UNII7	6625	135	29.05	31.10	27.36	20.167	22.341	21.584
	6705	151	25.86	28.89	29.41	20.214	22.291	20.796
	6785	167	27.16	32.97	27.19	20.266	22.508	19.915

Mode : EHT80 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	29.98	33.85	30.46	20.113	22.923	21.528
	6145	39	28.69	34.33	29.91	19.673	21.295	19.937
	6385	87	26.92	34.59	28.26	19.961	21.609	20.454
UNII7	6625	135	29.54	32.47	30.53	20.309	21.429	19.617
	6705	151	29.65	35.03	28.34	19.436	21.704	20.490
	6785	167	28.81	36.85	27.98	19.548	21.293	20.377

Mode : EHT80 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	32.93	34.95	31.07	22.432	22.349	22.495
	6145	39	33.18	35.33	31.13	22.271	23.377	22.189
	6385	87	33.01	34.89	30.56	22.360	22.004	22.540
UNII7	6625	135	33.02	35.87	32.37	22.803	23.174	22.671
	6705	151	32.97	36.29	32.52	22.169	22.805	22.468
	6785	167	33.70	33.95	32.85	22.596	23.394	22.653

Mode : EHT80 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	69.54	-	70.96	54.158	-	43.547
	6145	39	69.10	-	72.29	53.905	-	43.839
	6385	87	68.77	-	69.36	54.653	-	43.855
UNII7	6625	135	68.31	-	72.03	55.081	-	43.614
	6705	151	69.15	-	71.47	54.264	-	43.455
	6785	167	69.53	-	71.61	54.273	-	43.678

Mode : EHT80 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	88.80	-	-	77.761	-
	6145	39	-	88.62	-	-	77.710	-
	6385	87	-	88.87	-	-	77.797	-
UNII7	6625	135	-	88.71	-	-	77.767	-
	6705	151	-	88.43	-	-	77.766	-
	6785	167	-	88.99	-	-	77.739	-

Mode : EHT80 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5985	7	-	87.42	-	-	77.837	-
	6145	39	-	87.51	-	-	77.872	-
	6385	87	-	87.56	-	-	77.806	-
UNII7	6625	135	-	87.90	-	-	77.800	-
	6705	151	-	88.15	-	-	77.908	-
	6785	167	-	88.33	-	-	77.704	-

Mode : EHT160(80L) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	15.16	27.37	28.70	26.521	26.514	26.597
	6185	47	23.81	26.47	26.81	31.767	24.922	27.620
	6345	79	24.14	29.31	28.70	25.477	28.117	28.283
UNII7	6665	143	25.36	26.32	27.60	22.755	25.627	26.616

Mode : EHT160(80L) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	28.55	33.10	29.92	24.549	28.368	27.550
	6185	47	30.55	36.30	30.01	24.921	27.218	28.602
	6345	79	22.96	37.95	27.37	23.938	26.889	25.643
UNII7	6665	143	26.82	34.80	29.12	22.484	26.670	28.169

Mode : EHT160(80L) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	35.02	41.69	41.33	24.955	25.539	25.902
	6185	47	32.76	38.24	35.23	24.091	26.370	24.946
	6345	79	36.34	38.46	34.85	24.686	26.947	24.377
UNII7	6665	143	33.02	36.62	37.59	26.218	23.785	25.601

Mode : EHT160(80L) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	45.89	47.45	42.10	30.030	28.662	25.691
	6185	47	44.07	46.05	42.46	29.730	28.323	26.245
	6345	79	43.53	44.20	45.07	27.800	27.483	26.686
UNII7	6665	143	40.86	46.21	44.23	29.906	27.382	25.924

Mode : EHT160(80L) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	87.83	-	105.3	43.866	-	48.698
	6185	47	87.87	-	107.6	45.232	-	48.706
	6345	79	87.20	-	107.6	43.295	-	51.213
UNII7	6665	143	86.96	-	107.2	45.693	-	49.077

Mode : EHT160(80L) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	138.3	-	-	80.126	-
	6185	47	-	138.5	-	-	80.884	-
	6345	79	-	141.6	-	-	80.325	-
UNII7	6665	143	-	138.8	-	-	80.647	-

Mode : EHT160(80U) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	24.29	28.41	29.68	25.168	31.055	31.238
	6185	47	27.60	24.77	26.29	26.391	28.619	24.665
	6345	79	29.28	26.09	25.32	27.752	29.258	23.510
UNII7	6665	143	29.48	28.19	25.92	28.055	36.106	27.001

Mode : EHT160(80U) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	31.38	32.03	31.70	28.181	30.896	29.153
	6185	47	36.07	39.07	25.34	27.635	31.426	25.157
	6345	79	35.26	38.97	28.98	26.684	30.492	25.766
UNII7	6665	143	34.49	28.57	30.03	27.329	27.835	28.500

Mode : EHT160(80U) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	39.44	38.21	33.73	27.532	29.319	25.609
	6185	47	41.15	43.32	34.46	25.202	28.512	25.951
	6345	79	37.60	39.10	35.31	26.871	29.982	24.452
UNII7	6665	143	40.04	39.71	34.91	28.708	28.994	25.277

Mode : EHT160(80U) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	50.76	49.92	86.43	31.630	29.104	27.993
	6185	47	48.08	49.14	43.32	30.568	28.115	29.513
	6345	79	49.68	51.64	42.03	31.665	29.703	27.494
UNII7	6665	143	45.98	53.48	43.96	31.864	29.490	28.431

Mode : EHT160(80U) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	98.31	-	86.59	56.882	-	52.224
	6185	47	95.43	-	71.96	53.014	-	50.091
	6345	79	97.19	-	85.79	55.364	-	49.291
UNII7	6665	143	93.99	-	72.15	51.277	-	50.148

Mode : EHT160(80U) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	128.9	-	-	81.341	-
	6185	47	-	122.3	-	-	80.530	-
	6345	79	-	126.2	-	-	79.580	-
UNII7	6665	143	-	124.7	-	-	79.838	-

Mode : EHT160 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	170.1	-	-	156.82	-
	6185	47	-	175.6	-	-	157.23	-
	6345	79	-	171.8	-	-	157.25	-
UNII7	6665	143	-	173.3	-	-	157.22	-

Mode : EHT160 2x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6025	15	-	167.5	-	-	156.35	-
	6185	47	-	167.9	-	-	156.40	-
	6345	79	-	168.6	-	-	156.57	-
UNII7	6665	143	-	171.1	-	-	156.49	-

Mode : EHT320(80LL) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	162.1	34.98	39.42	169.51	85.526	53.397
	6265	63	168.6	127.1	101.8	184.67	130.25	77.695

Mode : EHT320(80LL) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	40.81	41.00	103.4	70.637	47.380	99.029
	6265	63	30.21	34.38	111.5	72.442	60.201	68.027

Mode : EHT320(80LL) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	170.7	54.37	110.7	54.808	42.216	40.576
	6265	63	165.1	139.0	111.1	48.737	70.775	43.784

Mode : EHT320(80LL) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	173.9	164.1	129.9	157.72	146.10	112.08
	6265	63	172.6	156.8	131.3	51.032	61.023	111.92

Mode : EHT320(80LL) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	178.7	-	149.0	162.56	-	128.18
	6265	63	179.4	-	151.1	161.89	-	127.36

Mode : EHT320(80LL) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	170.4	-	-	102.26	-
	6265	63	-	172.4	-	-	103.99	-

Mode : EHT320(80LM) 26T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	41.43	54.09	43.15	81.756	71.967	72.838
	6265	63	38.14	34.75	36.12	94.213	66.861	52.150

Mode : EHT320(80LM) 52T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	46.68	47.02	46.24	47.497	50.924	54.690
	6265	63	42.12	43.93	37.91	57.959	43.091	45.587

Mode : EHT320(80LM) 106T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	105.4	64.10	45.47	45.042	56.417	39.650
	6265	63	96.83	62.25	53.95	49.855	54.312	39.293

Mode : EHT320(80LM) 242T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	108.8	87.79	67.85	81.726	63.668	42.939
	6265	63	108.1	90.76	70.73	92.751	72.014	42.226

Mode : EHT320(80LM) 484T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	122.4	-	154.2	98.365	-	96.385
	6265	63	120.7	-	152.7	94.326	-	90.530

Mode : EHT320(80LM) 996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	171.1	-	-	105.17	-
	6265	63	-	173.6	-	-	104.45	-

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	38.72	58.34	97.54	59.138	76.092	81.167
	6265	63	28.46	59.72	94.55	61.509	55.679	105.01

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	45.34	50.71	42.56	46.375	55.644	47.844
	6265	63	43.45	49.39	86.17	42.915	48.183	54.189

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	52.51	74.24	95.96	44.133	43.952	43.362
	6265	63	48.60	74.75	96.85	41.434	66.203	50.875

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	74.52	71.05	111.2	45.380	51.499	88.882
	6265	63	77.77	68.25	109.2	49.337	50.582	86.029

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	100.7	-	106.6	73.608	-	90.934
	6265	63	105.1	-	104.0	76.374	-	92.018

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	183.0	-	-	96.189	-
	6265	63	-	179.7	-	-	94.859	-

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	36.87	148.4	29.35	49.001	141.50	84.847
	6265	63	106.3	144.5	31.58	102.47	125.95	111.43

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	43.76	53.25	32.42	44.603	52.063	52.848
	6265	63	42.12	41.97	169.3	47.783	56.668	164.81

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	110.6	156.1	168.3	52.390	55.817	43.104
	6265	63	45.93	153.1	163.7	44.901	84.706	41.085

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	127.8	140.8	174.1	100.69	127.68	159.59
	6265	63	129.4	142.8	176.5	112.84	122.80	162.83

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	152.4	-	179.9	123.93	-	162.39
	6265	63	155.5	-	178.6	126.36	-	163.55

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	173.6	-	-	106.46	-
	6265	63	-	174.0	-	-	104.95	-

Mode : EHT320(160L) 2x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	266.2	-	-	181.47	-
	6265	63	-	264.9	-	-	190.21	-

Mode : EHT320(160U) 2x996T

Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	289.1	-	-	231.83	-
	6265	63	-	290.8	-	-	230.35	-

Mode : EHT320 4x996T								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	329.5	-	-	314.14	-
	6265	63	-	328.7	-	-	314.71	-

Mode : EHT320 SU								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	6105	31	-	331.5	-	-	315.14	-
	6265	63	-	329.9	-	-	314.92	-

Mode : 802.11a								
Band	Freq. [MHz]	CH.	26dB Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
			RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
			ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
UNII5	5935	2	-	20.79	-	-	16.562	-
	6175	45	-	20.86	-	-	16.576	-
	6415	93	-	20.86	-	-	16.534	-
UNII7	6535	117	-	20.90	-	-	16.599	-
	6695	149	-	20.84	-	-	16.564	-
	6855	181	-	20.87	-	-	16.561	-

☐ Test Plots(26dB & 99% Bandwidth)
[Indoor Cilent]

Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]


802.11be EHT20M Ch.185(6875 MHz) SU




802.11be EHT40M Ch.3(5965 MHz) SU



802.11be EHT80M Ch.119(6545 MHz) SU

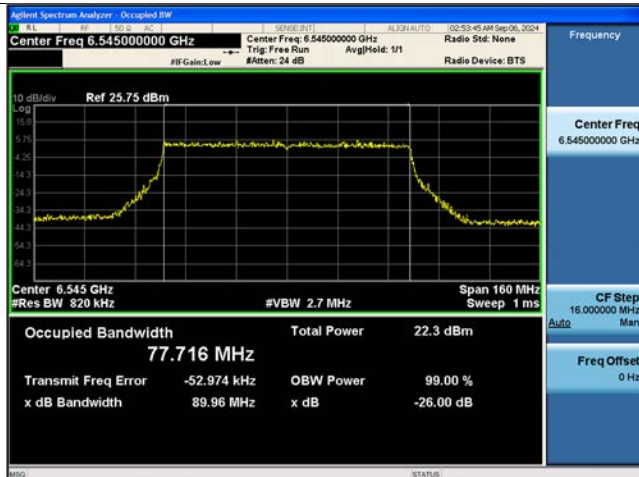


802.11be EHT160M Ch.79(6345 MHz) SU

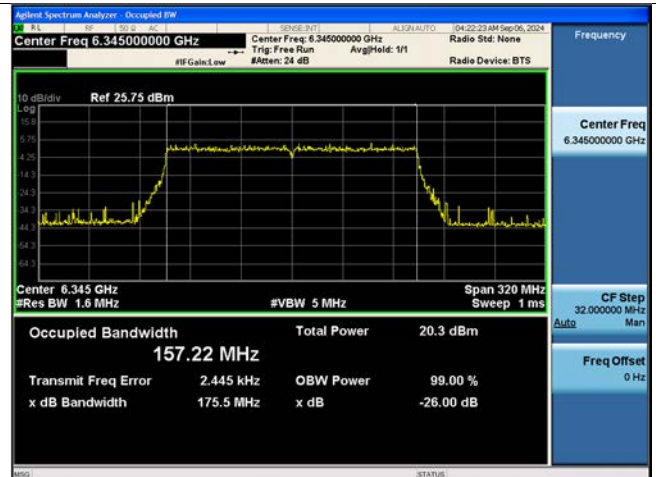

Bandwidth 320M, Ch. 63(6265 MHz) SU



802.11a Ch.97(6435 MHz)

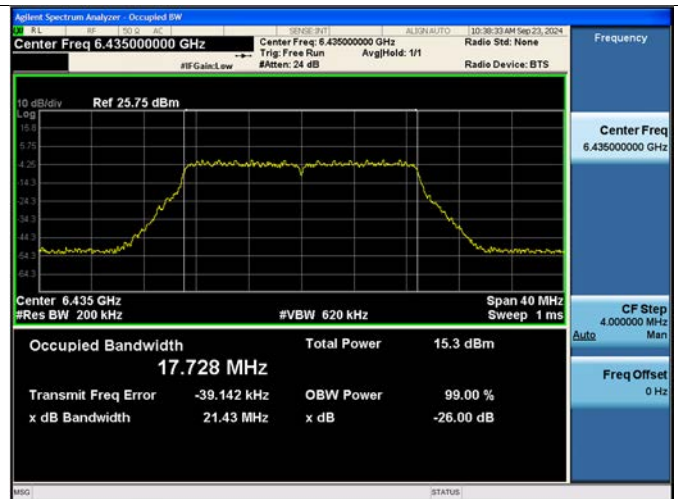

[Ant.2]


802.11be EHT20M Ch.181(6855 MHz) SU




802.11be EHT40M Ch.3(5965 MHz) SU




802.11be EHT80M Ch.215(7025 MHz) SU

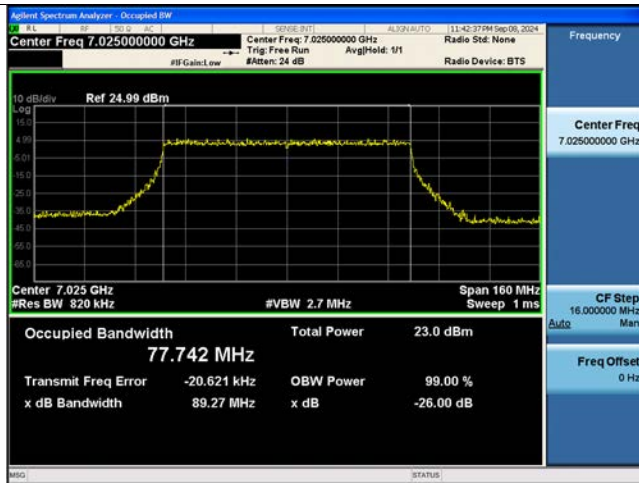


802.11be EHT160M Ch.15(6025 MHz) SU

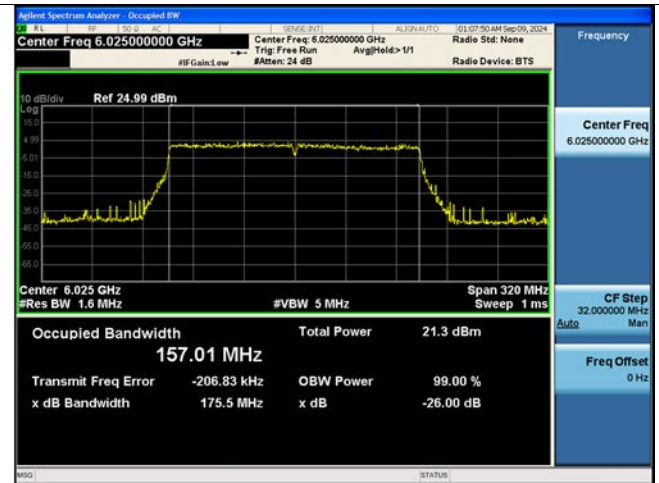

Bandwidth 320M, Ch. 63(6265 MHz) SU

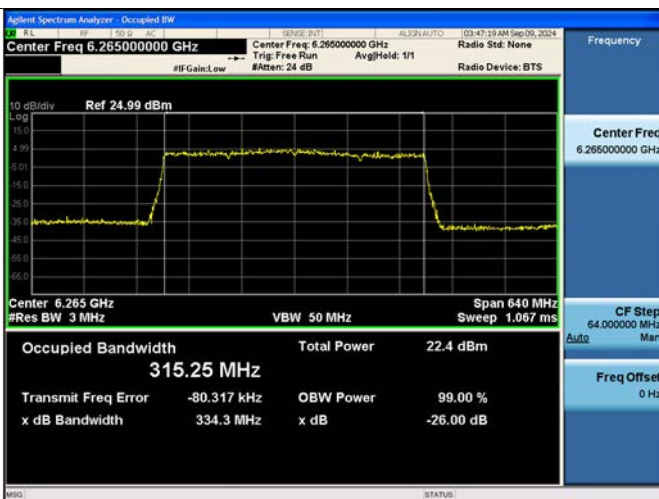

802.11a Ch.2(5935 MHz)

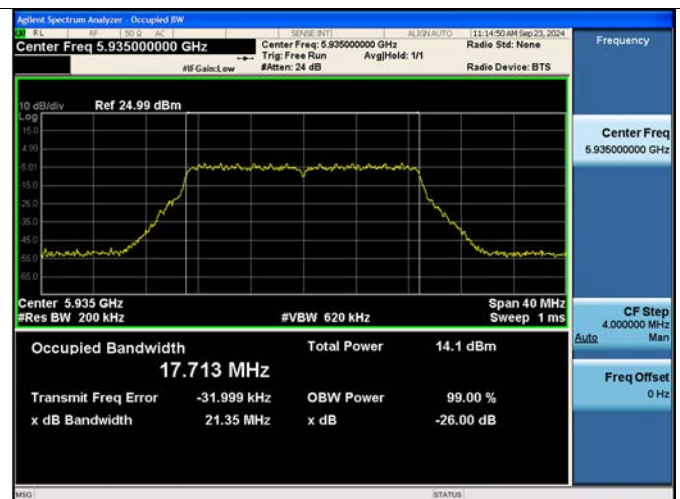

[Standard Client]

Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]


802.11be EHT20M Ch.181(6855 MHz) SU




802.11be EHT40M Ch.123(6565 MHz) SU




802.11be EHT80M Ch.7(5985 MHz) SU

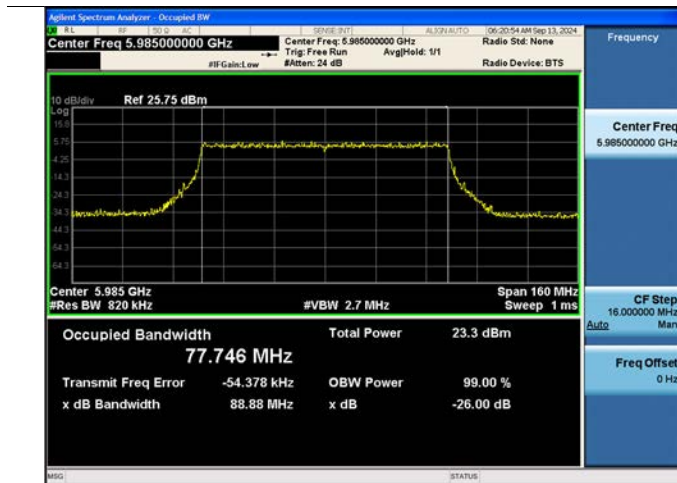


802.11be EHT160M Ch.79(6345 MHz) SU

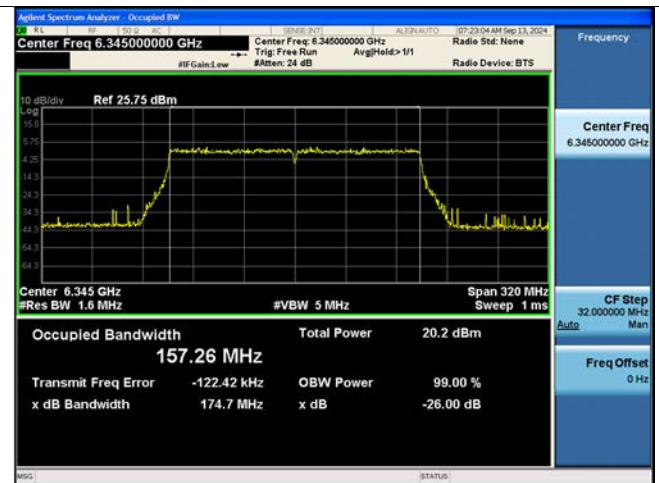

Bandwidth 320M, Ch. 63(6265 MHz) SU

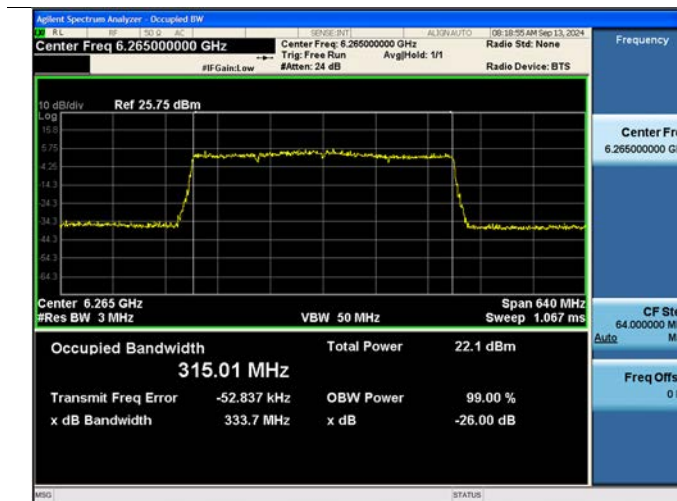

802.11a Ch.117(6535 MHz)

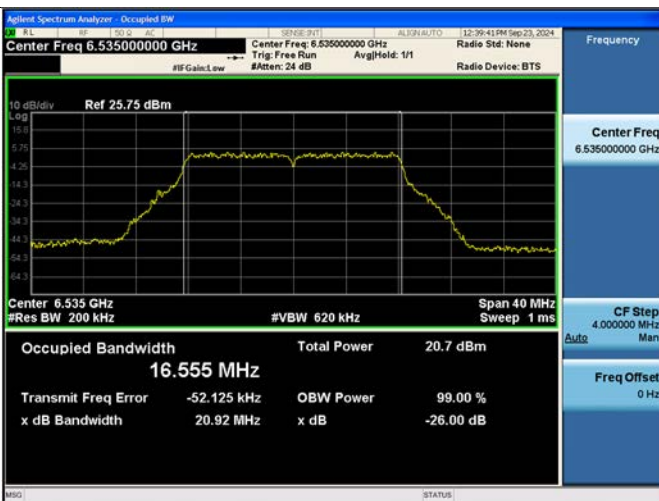

[Ant.2]

802.11be EHT20M Ch.45(6175 MHz) SU




802.11be EHT40M Ch.147(6685 MHz) SU




802.11be EHT80M Ch.135(6625 MHz) SU




802.11be EHT160M Ch.47(6185 MHz) SU

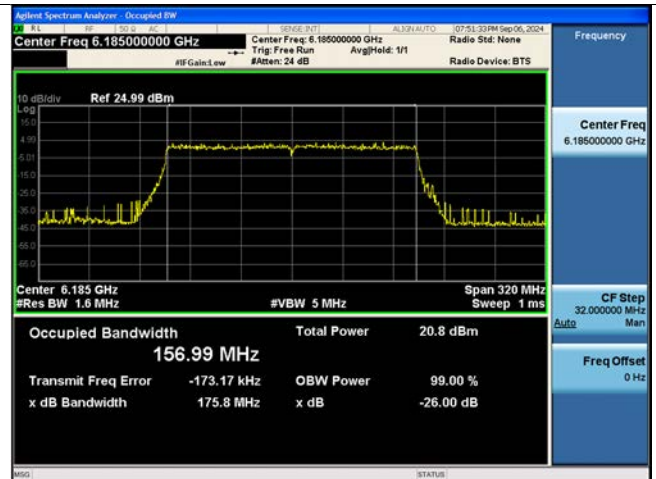

Bandwidth 320M, Ch. 63(6265 MHz) SU

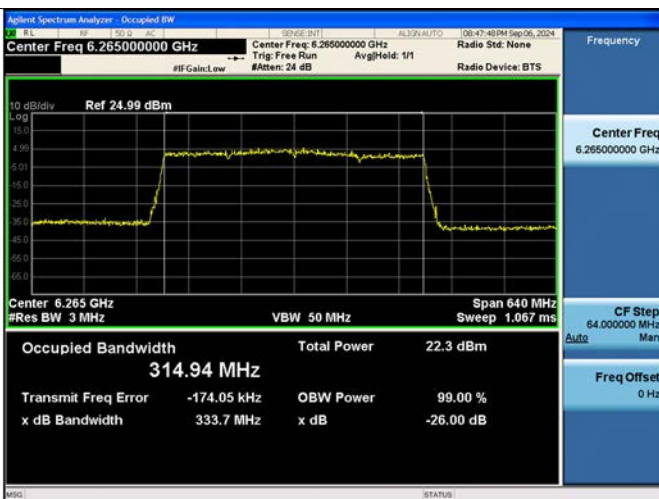

802.11a Ch.2(5935 MHz)

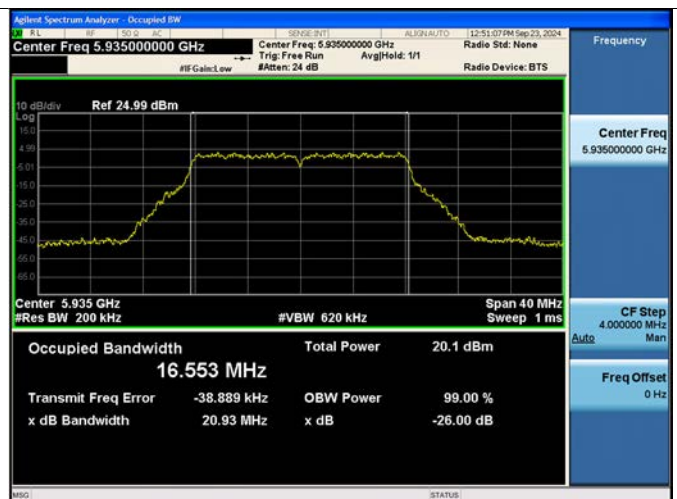


[Very Low Power Device]


Note: In order to simplify the report, attached plots were only the widest channel.

[Ant.1]

802.11be EHT20M Ch.181(6855 MHz) SU

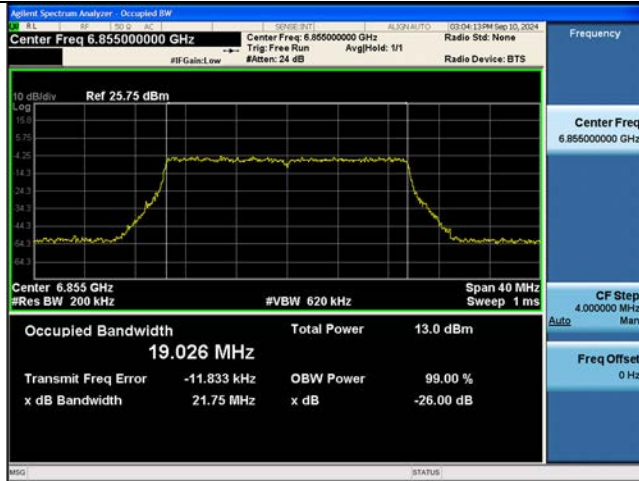

802.11be EHT40M Ch.91(6405 MHz) SU

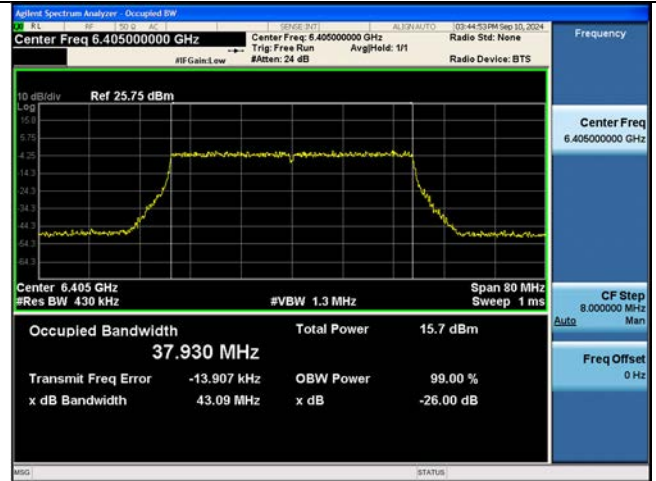

802.11be EHT80M Ch.167(6785 MHz) SU




802.11be EHT160M Ch.79(6345 MHz) 2x996T RU 68



Bandwidth 320M, Ch. 31(6105 MHz) SU




802.11a Ch.181(6855 MHz)

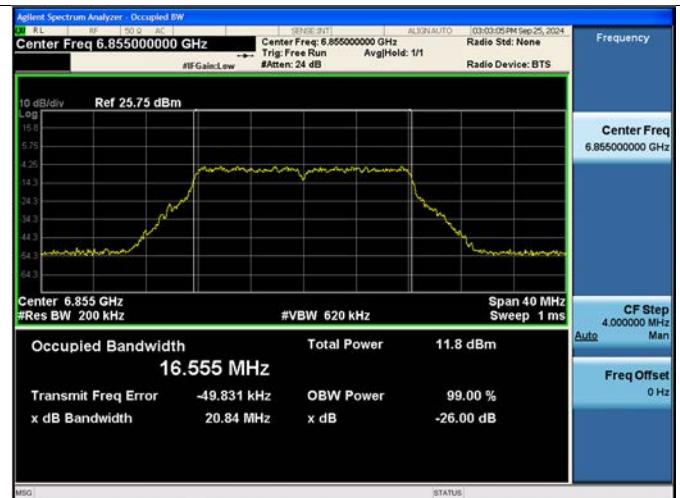


[Ant.2]

802.11be EHT20M Ch.149(6695 MHz) SU

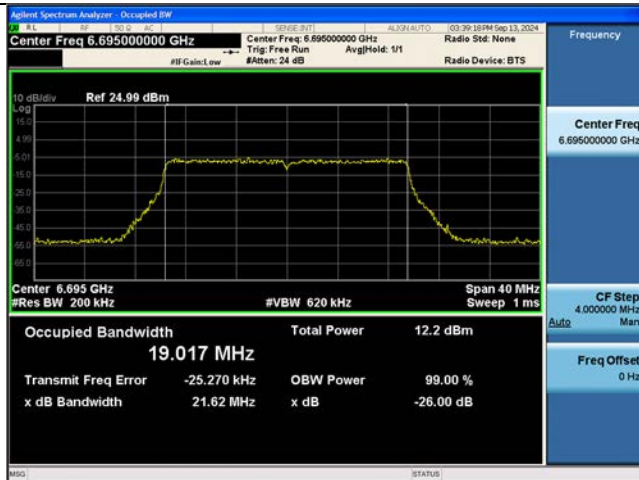


802.11be EHT40M Ch.179(6845 MHz) SU

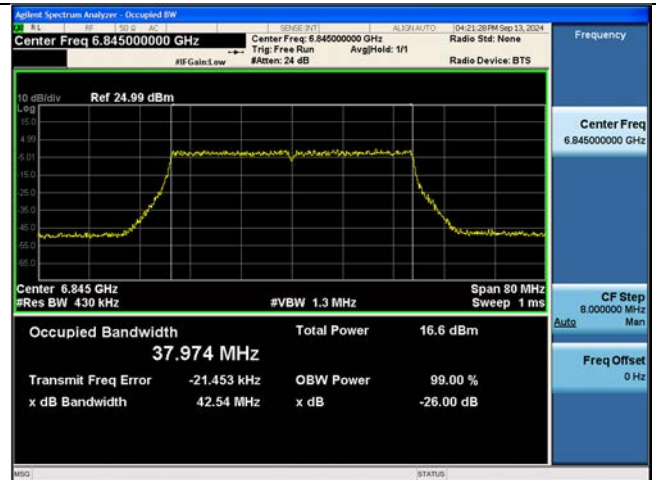


802.11be EHT80M Ch.167(6785 MHz) 996T RU67




802.11be EHT160M Ch.47(6185 MHz) SU

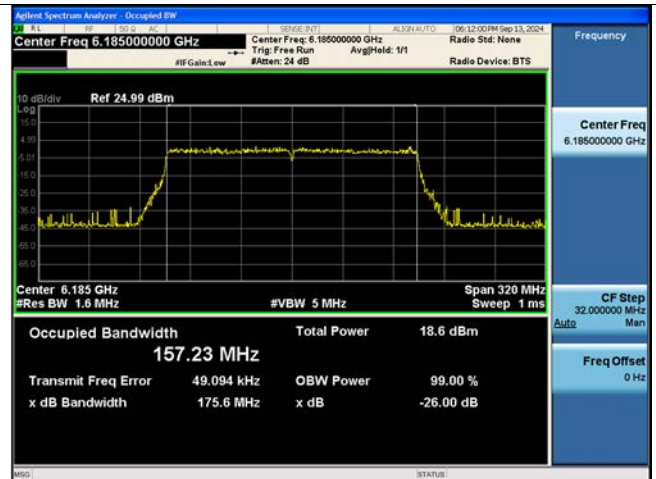

Bandwidth 320M, Ch. 31(6105 MHz) SU

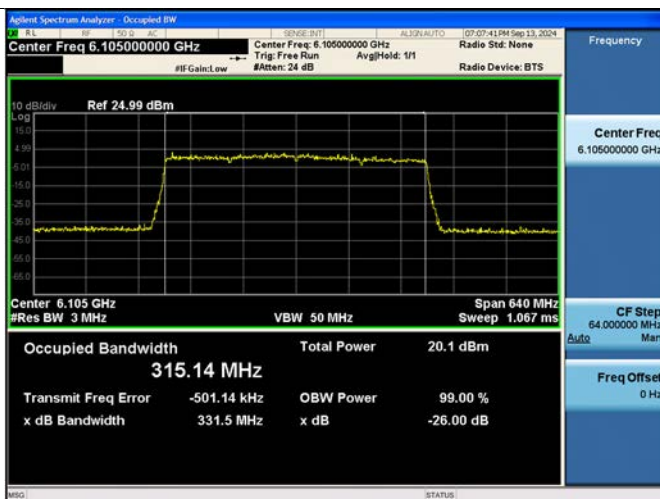

802.11a Ch.117(6535 MHz)

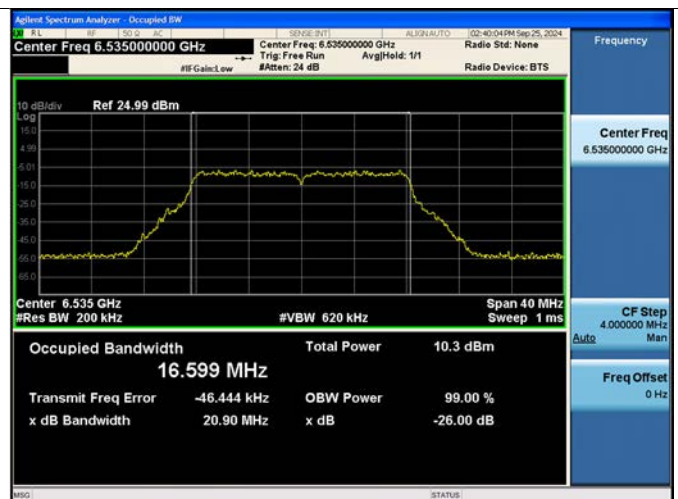

10.3 OUTPUT POWER MEASUREMENT

10.3.1 E.I.R.P Output Power(Indoor client)

Indoor client Limit : 24 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.3.1.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-1.75	-3.48	0.48	-2.09	-3.49	0.28	-1.80	-3.34	0.51	-2.45	-4.02	-0.19	0.32	24
	6175	45	-1.14	-5.74	0.15	-1.32	-5.94	-0.03	-1.24	-5.80	0.06	-2.45	-4.02	-0.19	-0.04	24
	6415	93	-1.25	-2.35	1.24	-1.46	-2.68	0.98	-1.10	-2.34	1.33	-2.45	-4.02	-0.19	1.14	24
UNII6	6435	97	-1.20	-2.32	1.29	-1.49	-2.66	0.97	-1.05	-2.34	1.37	-3.96	-5.08	-1.49	-0.12	24
	6475	105	-1.65	-1.87	1.25	-1.95	-2.25	0.91	-1.50	-1.94	1.30	-3.96	-5.08	-1.49	-0.19	24
	6515	113	-1.48	-2.35	1.11	-1.81	-2.81	0.73	-1.46	-2.58	1.02	-3.96	-5.08	-1.49	-0.38	24
UNII7	6535	117	-1.71	-2.23	1.05	-2.04	-2.69	0.66	-1.64	-2.40	1.01	-3.96	-5.08	-1.49	-0.44	24
	6695	149	-1.09	-1.34	1.80	-1.40	-1.76	1.43	-1.03	-1.50	1.75	-3.96	-5.08	-1.49	0.31	24
	6855	181	-1.23	-3.71	0.72	-1.64	-4.04	0.33	-1.40	-3.66	0.63	-3.96	-5.08	-1.49	-0.77	24
UNII8	6875	185	-1.23	-3.70	0.72	-1.64	-3.98	0.36	-1.40	-3.55	0.67	-3.99	-5.26	-1.59	-0.87	24
	6995	209	-1.71	-2.07	1.12	-2.16	-2.45	0.70	-1.89	-2.19	0.97	-3.99	-5.26	-1.59	-0.47	24
	7115	233	-2.10	-2.19	0.87	-2.48	-2.51	0.52	-2.13	-2.11	0.89	-3.99	-5.26	-1.59	-0.70	24

Mode : EHT20 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	0.82	0.00	3.44	0.63	-0.18	3.25	0.88	0.03	3.48	-2.45	-4.02	-0.19	3.29	24
	6175	45	0.94	1.12	4.04	0.77	0.93	3.86	1.01	1.12	4.07	-2.45	-4.02	-0.19	3.88	24
	6415	93	0.19	0.71	3.47	0.03	0.54	3.30	0.29	0.76	3.54	-2.45	-4.02	-0.19	3.35	24
UNII6	6435	97	0.65	0.99	3.83	0.45	0.82	3.65	0.65	1.02	3.85	-3.96	-5.08	-1.49	2.36	24
	6475	105	0.63	1.06	3.86	0.49	0.92	3.72	0.69	1.12	3.92	-3.96	-5.08	-1.49	2.43	24
	6515	113	0.59	0.99	3.81	0.38	0.77	3.59	0.46	0.90	3.70	-3.96	-5.08	-1.49	2.32	24
UNII7	6535	117	0.45	0.79	3.64	0.20	0.56	3.39	0.35	0.76	3.57	-3.96	-5.08	-1.49	2.15	24
	6695	149	1.25	1.26	4.27	1.02	1.05	4.05	1.19	1.24	4.22	-3.96	-5.08	-1.49	2.78	24
	6855	181	1.37	1.02	4.21	1.14	0.84	4.00	1.22	1.15	4.20	-3.96	-5.08	-1.49	2.72	24
UNII8	6875	185	1.23	0.33	3.81	1.01	0.19	3.63	1.15	0.52	3.86	-3.99	-5.26	-1.59	2.27	24
	6995	209	0.56	1.04	3.81	0.34	0.87	3.62	0.42	1.09	3.78	-3.99	-5.26	-1.59	2.22	24
	7115	233	-0.25	0.89	3.37	-0.46	0.74	3.19	-0.24	1.10	3.49	-3.99	-5.26	-1.59	1.90	24

Mode : EHT20 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	4.85	3.35	7.17	-	-	-	4.85	3.38	7.18	-2.45	-4.02	-0.19	6.99	24
	6175	45	4.77	2.94	6.96	-	-	-	4.80	2.97	6.99	-2.45	-4.02	-0.19	6.80	24
	6415	93	3.58	3.97	6.79	-	-	-	3.62	4.00	6.82	-2.45	-4.02	-0.19	6.63	24
UNII6	6435	97	4.86	4.82	7.85	-	-	-	4.88	4.86	7.88	-3.96	-5.08	-1.49	6.39	24
	6475	105	4.86	4.88	7.88	-	-	-	4.90	4.88	7.90	-3.96	-5.08	-1.49	6.41	24
	6515	113	4.75	4.64	7.70	-	-	-	4.66	4.58	7.63	-3.96	-5.08	-1.49	6.21	24
UNII7	6535	117	4.65	4.56	7.61	-	-	-	4.60	4.54	7.58	-3.96	-5.08	-1.49	6.12	24
	6695	149	5.40	4.87	8.15	-	-	-	5.37	4.87	8.13	-3.96	-5.08	-1.49	6.66	24
	6855	181	5.36	4.56	7.99	-	-	-	5.26	4.66	7.98	-3.96	-5.08	-1.49	6.50	24
UNII8	6875	185	5.34	4.41	7.91	-	-	-	5.27	4.53	7.93	-3.99	-5.26	-1.59	6.34	24
	6995	209	4.46	5.37	7.94	-	-	-	4.35	5.38	7.91	-3.99	-5.26	-1.59	6.35	24
	7115	233	3.84	5.05	7.50	-	-	-	3.83	5.18	7.57	-3.99	-5.26	-1.59	5.98	24

Mode : EHT20 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	8.35	6.99	10.73	-	-	-	-2.45	-4.02	-0.19	10.54	24
	6175	45	-	-	-	8.19	7.29	10.78	-	-	-	-2.45	-4.02	-0.19	10.59	24
	6415	93	-	-	-	7.52	7.74	10.64	-	-	-	-2.45	-4.02	-0.19	10.45	24
UNII6	6435	97	-	-	-	8.42	8.64	11.54	-	-	-	-3.96	-5.08	-1.49	10.05	24
	6475	105	-	-	-	8.28	8.68	11.50	-	-	-	-3.96	-5.08	-1.49	10.01	24
	6515	113	-	-	-	8.15	8.57	11.37	-	-	-	-3.96	-5.08	-1.49	9.88	24
UNII7	6535	117	-	-	-	8.15	8.17	11.17	-	-	-	-3.96	-5.08	-1.49	9.68	24
	6695	149	-	-	-	8.87	8.77	11.83	-	-	-	-3.96	-5.08	-1.49	10.34	24
	6855	181	-	-	-	9.10	8.74	11.93	-	-	-	-3.96	-5.08	-1.49	10.44	24
UNII8	6875	185	-	-	-	8.95	8.29	11.64	-	-	-	-3.99	-5.26	-1.59	10.05	24
	6995	209	-	-	-	8.54	9.21	11.90	-	-	-	-3.99	-5.26	-1.59	10.31	24
	7115	233	-	-	-	7.60	9.14	11.45	-	-	-	-3.99	-5.26	-1.59	9.86	24

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	4.92	4.07	7.52	-	-	-	-2.45	-4.02	-0.19	7.33	24
	6175	45	-	-	-	8.21	7.66	10.95	-	-	-	-2.45	-4.02	-0.19	10.76	24
	6415	93	-	-	-	7.54	7.23	10.40	-	-	-	-2.45	-4.02	-0.19	10.21	24
UNII6	6435	97	-	-	-	8.52	8.78	11.67	-	-	-	-3.96	-5.08	-1.49	10.18	24
	6475	105	-	-	-	8.46	8.83	11.66	-	-	-	-3.96	-5.08	-1.49	10.17	24
	6515	113	-	-	-	8.41	8.64	11.54	-	-	-	-3.96	-5.08	-1.49	10.05	24
UNII7	6535	117	-	-	-	8.28	8.54	11.42	-	-	-	-3.96	-5.08	-1.49	9.93	24
	6695	149	-	-	-	8.97	9.00	11.99	-	-	-	-3.96	-5.08	-1.49	10.50	24
	6855	181	-	-	-	9.01	8.73	11.88	-	-	-	-3.96	-5.08	-1.49	10.39	24
UNII8	6875	185	-	-	-	8.87	8.32	11.61	-	-	-	-3.99	-5.26	-1.59	10.02	24
	6995	209	-	-	-	8.10	8.80	11.48	-	-	-	-3.99	-5.26	-1.59	9.89	24
	7115	233	-	-	-	7.57	8.73	11.20	-	-	-	-3.99	-5.26	-1.59	9.61	24

Mode : EHT40 26T

Model: UNII 5 to 24

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-1.75	-3.34	0.54	-1.96	-3.35	0.41	-1.81	-3.08	0.61	-2.45	-4.02	-0.19	0.42	24
	6165	43	-1.37	-6.08	-0.11	-1.37	-6.00	-0.08	-1.14	-5.69	0.17	-2.45	-4.02	-0.19	-0.02	24
	6405	91	-1.35	-2.32	1.20	-1.26	-2.40	1.22	-1.03	-2.25	1.41	-2.45	-4.02	-0.19	1.22	24
UNII6	6445	99	-1.14	-2.33	1.31	-1.16	-2.51	1.23	-1.01	-2.44	1.34	-3.96	-5.08	-1.49	-0.15	24
	6485	107	-1.61	-1.79	1.31	-1.58	-2.05	1.20	-1.38	-2.09	1.29	-3.96	-5.08	-1.49	-0.18	24
	6525	115	-1.37	-2.24	1.22	-1.51	-2.72	0.94	-1.37	-2.80	0.99	-3.96	-5.08	-1.49	-0.27	24
UNII7	6565	123	-1.63	-2.51	0.96	-1.70	-2.78	0.81	-1.47	-2.74	0.95	-3.96	-5.08	-1.49	-0.53	24
	6685	147	-1.01	-1.89	1.58	-1.05	-2.20	1.42	-1.08	-2.25	1.38	-3.96	-5.08	-1.49	0.09	24
	6845	179	-1.16	-3.57	0.81	-1.40	-3.74	0.59	-1.43	-3.56	0.64	-3.96	-5.08	-1.49	-0.68	24
UNII8	6885	187	-1.51	-3.65	0.56	-1.80	-3.68	0.37	-1.69	-3.47	0.52	-3.99	-5.26	-1.59	-1.03	24
	7005	211	-1.65	-2.05	1.16	-1.89	-2.27	0.93	-2.02	-2.32	0.84	-3.99	-5.26	-1.59	-0.43	24
	7085	227	-1.49	-1.76	1.39	-1.86	-2.04	1.06	-1.85	-1.92	1.13	-3.99	-5.26	-1.59	-0.20	24

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	1.04	-0.13	3.50	0.92	-0.21	3.40	1.10	0.01	3.60	-2.45	-4.02	-0.19	3.41	24
	6165	43	0.71	0.82	3.78	0.63	0.84	3.75	0.88	0.95	3.92	-2.45	-4.02	-0.19	3.73	24
	6405	91	-0.04	0.91	3.47	-0.09	0.84	3.41	0.15	1.05	3.63	-2.45	-4.02	-0.19	3.44	24
UNII6	6445	99	0.51	0.88	3.71	0.40	0.77	3.60	0.55	0.93	3.75	-3.96	-5.08	-1.49	2.26	24
	6485	107	0.33	0.97	3.67	0.25	0.79	3.54	0.32	0.89	3.63	-3.96	-5.08	-1.49	2.18	24
	6525	115	0.35	0.79	3.58	0.05	0.46	3.27	0.10	0.58	3.36	-3.96	-5.08	-1.49	2.09	24
UNII7	6565	123	0.08	0.49	3.30	0.01	0.35	3.19	0.12	0.53	3.34	-3.96	-5.08	-1.49	1.85	24
	6685	147	1.20	1.23	4.23	0.98	0.97	3.98	1.06	1.08	4.08	-3.96	-5.08	-1.49	2.74	24
	6845	179	1.26	0.94	4.12	0.97	0.75	3.87	0.98	1.02	4.01	-3.96	-5.08	-1.49	2.63	24
UNII8	6885	187	1.07	0.25	3.69	0.88	0.20	3.56	0.98	0.45	3.73	-3.99	-5.26	-1.59	2.14	24
	7005	211	0.38	0.93	3.67	0.05	0.69	3.39	-0.06	0.79	3.40	-3.99	-5.26	-1.59	2.08	24
	7085	227	-0.01	1.58	3.87	-0.42	1.43	3.61	-0.27	1.72	3.85	-3.99	-5.26	-1.59	2.28	24

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	4.80	3.37	7.16	4.67	3.28	7.04	4.95	3.51	7.30	-2.45	-4.02	-0.19	7.11	24
	6165	43	4.60	2.68	6.76	4.52	2.56	6.66	4.71	2.89	6.91	-2.45	-4.02	-0.19	6.72	24
	6405	91	3.56	3.76	6.67	3.51	3.63	6.58	3.66	3.86	6.77	-2.45	-4.02	-0.19	6.58	24
UNII6	6445	99	4.86	4.83	7.85	4.77	4.73	7.76	4.96	4.90	7.94	-3.96	-5.08	-1.49	6.45	24
	6485	107	4.84	4.91	7.88	4.69	4.76	7.73	4.87	4.88	7.89	-3.96	-5.08	-1.49	6.40	24
	6525	115	4.79	4.68	7.75	4.55	4.45	7.51	4.58	4.46	7.53	-3.96	-5.08	-1.49	6.26	24
UNII7	6565	123	4.56	4.54	7.56	4.36	4.41	7.40	4.54	4.58	7.57	-3.96	-5.08	-1.49	6.08	24
	6685	147	5.50	4.97	8.26	5.26	4.80	8.05	5.39	4.86	8.14	-3.96	-5.08	-1.49	6.77	24
	6845	179	5.41	4.60	8.03	5.16	4.48	7.85	5.19	4.67	7.95	-3.96	-5.08	-1.49	6.54	24
UNII8	6885	187	5.31	4.41	7.89	5.12	4.38	7.78	5.24	4.60	7.94	-3.99	-5.26	-1.59	6.35	24
	7005	211	4.40	5.35	7.91	4.18	5.23	7.75	4.07	5.22	7.69	-3.99	-5.26	-1.59	6.32	24
	7085	227	3.57	5.03	7.37	3.60	4.94	7.33	3.58	5.17	7.46	-3.99	-5.26	-1.59	5.87	24

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	8.32	7.12	10.77	-	-	-	8.45	7.22	10.89	-2.45	-4.02	-0.19	10.70	24
	6165	43	7.52	6.68	10.13	-	-	-	7.50	6.81	10.18	-2.45	-4.02	-0.19	9.99	24
	6405	91	7.57	7.70	10.65	-	-	-	7.71	7.82	10.78	-2.45	-4.02	-0.19	10.59	24
UNII6	6445	99	8.34	8.54	11.45	-	-	-	8.38	8.57	11.48	-3.96	-5.08	-1.49	9.99	24
	6485	107	8.10	8.58	11.35	-	-	-	8.13	8.57	11.37	-3.96	-5.08	-1.49	9.88	24
	6525	115	8.72	8.94	11.84	-	-	-	8.63	8.78	11.72	-3.96	-5.08	-1.49	10.35	24
UNII7	6565	123	8.35	8.76	11.57	-	-	-	8.40	8.79	11.61	-3.96	-5.08	-1.49	10.12	24
	6685	147	8.89	8.73	11.82	-	-	-	8.87	8.68	11.78	-3.96	-5.08	-1.49	10.33	24
	6845	179	9.03	8.67	11.87	-	-	-	8.90	8.63	11.78	-3.96	-5.08	-1.49	10.38	24
UNII8	6885	187	9.20	8.65	11.94	-	-	-	9.18	8.76	11.98	-3.99	-5.26	-1.59	10.39	24
	7005	211	8.46	9.09	11.79	-	-	-	8.23	8.97	11.63	-3.99	-5.26	-1.59	10.20	24
	7085	227	7.60	8.93	11.33	-	-	-	7.60	8.97	11.35	-3.99	-5.26	-1.59	9.76	24

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	-	-	-	11.36	10.31	13.88	-	-	-	-2.45	-4.02	-0.19	13.69	24
	6165	43	-	-	-	10.60	10.50	13.56	-	-	-	-2.45	-4.02	-0.19	13.37	24
	6405	91	-	-	-	10.57	10.73	13.66	-	-	-	-2.45	-4.02	-0.19	13.47	24
UNII6	6445	99	-	-	-	11.89	12.02	14.96	-	-	-	-3.96	-5.08	-1.49	13.47	24
	6485	107	-	-	-	11.72	12.03	14.89	-	-	-	-3.96	-5.08	-1.49	13.40	24
	6525	115	-	-	-	11.53	11.76	14.66	-	-	-	-3.96	-5.08	-1.49	13.17	24
UNII7	6565	123	-	-	-	10.87	11.01	13.95	-	-	-	-3.96	-5.08	-1.49	12.46	24
	6685	147	-	-	-	11.85	11.48	14.68	-	-	-	-3.96	-5.08	-1.49	13.19	24
	6845	179	-	-	-	11.86	11.36	14.63	-	-	-	-3.96	-5.08	-1.49	13.14	24
UNII8	6885	187	-	-	-	12.28	11.74	15.02	-	-	-	-3.99	-5.26	-1.59	13.43	24
	7005	211	-	-	-	11.23	12.13	14.71	-	-	-	-3.99	-5.26	-1.59	13.12	24
	7085	227	-	-	-	10.68	11.87	14.33	-	-	-	-3.99	-5.26	-1.59	12.74	24

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5965	3	-	-	-	11.04	10.03	13.58	-	-	-	-2.45	-4.02	-0.19	13.39	24
	6165	43	-	-	-	11.27	9.70	13.56	-	-	-	-2.45	-4.02	-0.19	13.37	24
	6405	91	-	-	-	10.52	10.34	13.44	-	-	-	-2.45	-4.02	-0.19	13.25	24
UNII6	6445	99	-	-	-	11.49	11.67	14.60	-	-	-	-3.96	-5.08	-1.49	13.11	24
	6485	107	-	-	-	11.35	11.68	14.53	-	-	-	-3.96	-5.08	-1.49	13.04	24
	6525	115	-	-	-	11.17	11.45	14.32	-	-	-	-3.96	-5.08	-1.49	12.83	24
UNII7	6565	123	-	-	-	11.03	11.38	14.22	-	-	-	-3.96	-5.08	-1.49	12.73	24
	6685	147	-	-	-	11.98	11.75	14.88	-	-	-	-3.96	-5.08	-1.49	13.39	24
	6845	179	-	-	-	11.86	11.59	14.74	-	-	-	-3.96	-5.08	-1.49	13.25	24
UNII8	6885	187	-	-	-	11.95	11.46	14.72	-	-	-	-3.99	-5.26	-1.59	13.13	24
	7005	211	-	-	-	10.96	11.84	14.43	-	-	-	-3.99	-5.26	-1.59	12.84	24
	7085	227	-	-	-	10.65	12.03	14.41	-	-	-	-3.99	-5.26	-1.59	12.82	24

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-2.10	-3.50	0.27	-2.22	-3.49	0.20	-2.16	-3.26	0.33	-2.45	-4.02	-0.19	0.14	24
	6145	39	-1.02	-2.89	1.16	-1.12	-2.99	1.06	-1.03	-2.70	1.23	-2.45	-4.02	-0.19	1.04	24
	6385	87	-1.72	-2.63	0.86	-1.74	-2.78	0.78	-1.29	-2.72	1.07	-2.45	-4.02	-0.19	0.88	24
UNII6	6465	103	-1.51	-2.85	0.88	-1.28	-3.03	0.95	-1.05	-3.31	0.97	-3.96	-5.08	-1.49	-0.52	24
	6545	119	-2.03	-2.26	0.87	-2.09	-2.96	0.51	-1.91	-3.19	0.51	-3.96	-5.08	-1.49	-0.62	24
UNII7	6625	135	-2.23	-1.94	0.93	-1.97	-2.37	0.85	-1.62	-2.29	1.07	-3.96	-5.08	-1.49	-0.42	24
	6705	151	-1.34	-2.38	1.18	-1.37	-2.85	0.96	-1.33	-3.10	0.89	-3.96	-5.08	-1.49	-0.31	24
	6785	167	-1.10	-2.28	1.36	-1.22	-2.51	1.19	-1.15	-2.64	1.18	-3.96	-5.08	-1.49	-0.13	24
UNII8	6865	183	-1.57	-3.96	0.41	-1.96	-3.98	0.16	-2.14	-3.82	0.11	-3.99	-5.26	-1.59	-1.18	24
	6945	199	-1.11	-2.50	1.26	-1.58	-2.55	0.97	-1.89	-2.37	0.89	-3.99	-5.26	-1.59	-0.33	24
	7025	215	-1.54	-1.73	1.38	-2.14	-2.21	0.83	-2.73	-2.44	0.43	-3.99	-5.26	-1.59	-0.21	24

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	1.07	0.12	3.63	1.31	0.27	3.83	1.49	0.37	3.97	-2.45	-4.02	-0.19	3.78	24
	6145	39	0.62	0.84	3.74	0.61	0.76	3.69	0.75	0.89	3.83	-2.45	-4.02	-0.19	3.64	24
	6385	87	0.11	1.03	3.60	-0.03	0.93	3.48	0.16	1.04	3.63	-2.45	-4.02	-0.19	3.44	24
UNII6	6465	103	0.38	0.87	3.64	0.47	0.92	3.71	0.47	0.85	3.68	-3.96	-5.08	-1.49	2.22	24
	6545	119	0.34	0.78	3.58	0.10	0.47	3.30	0.07	0.48	3.29	-3.96	-5.08	-1.49	2.09	24
UNII7	6625	135	0.46	0.65	3.56	0.64	0.57	3.62	0.73	0.84	3.80	-3.96	-5.08	-1.49	2.31	24
	6705	151	1.15	1.21	4.19	1.04	0.99	4.03	0.90	0.92	3.92	-3.96	-5.08	-1.49	2.70	24
	6785	167	0.91	1.06	4.00	0.63	0.99	3.83	0.60	1.00	3.82	-3.96	-5.08	-1.49	2.51	24
UNII8	6865	183	1.34	0.18	3.81	1.08	0.21	3.68	0.94	0.40	3.69	-3.99	-5.26	-1.59	2.22	24
	6945	199	0.97	0.34	3.68	0.55	0.25	3.41	0.23	0.55	3.40	-3.99	-5.26	-1.59	2.09	24
	7025	215	0.51	1.11	3.83	-0.07	0.77	3.38	-0.48	0.74	3.19	-3.99	-5.26	-1.59	2.24	24

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	4.42	3.28	6.89	4.68	3.39	7.09	4.80	3.45	7.19	-2.45	-4.02	-0.19	7.00	24
	6145	39	4.74	2.59	6.81	4.49	2.53	6.63	4.56	2.72	6.75	-2.45	-4.02	-0.19	6.62	24
	6385	87	3.61	3.61	6.62	3.53	3.61	6.58	3.60	3.73	6.68	-2.45	-4.02	-0.19	6.49	24
UNII6	6465	103	4.69	4.75	7.73	4.79	4.80	7.81	4.79	4.75	7.78	-3.96	-5.08	-1.49	6.32	24
	6545	119	4.65	4.72	7.70	4.52	4.42	7.48	4.46	4.45	7.47	-3.96	-5.08	-1.49	6.21	24
UNII7	6625	135	4.83	4.60	7.73	4.95	4.52	7.75	5.08	4.79	7.95	-3.96	-5.08	-1.49	6.46	24
	6705	151	5.43	4.90	8.18	5.33	4.69	8.03	5.22	4.64	7.95	-3.96	-5.08	-1.49	6.69	24
	6785	167	5.23	4.76	8.01	4.95	4.65	7.81	4.93	4.67	7.81	-3.96	-5.08	-1.49	6.52	24
UNII8	6865	183	5.55	4.30	7.98	5.23	4.35	7.82	5.16	4.55	7.88	-3.99	-5.26	-1.59	6.39	24
	6945	199	5.15	4.46	7.83	4.71	4.40	7.57	4.46	4.67	7.57	-3.99	-5.26	-1.59	6.24	24
	7025	215	4.53	5.42	8.01	3.90	5.09	7.54	3.55	5.05	7.37	-3.99	-5.26	-1.59	6.42	24

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	7.67	5.64	9.78	7.68	5.85	9.87	7.72	5.89	9.91	-2.45	-4.02	-0.19	9.72	24
	6145	39	7.75	6.10	10.01	7.70	6.12	9.99	7.79	6.45	10.18	-2.45	-4.02	-0.19	9.99	24
	6385	87	6.88	6.90	9.90	6.78	6.89	9.84	6.87	7.04	9.97	-2.45	-4.02	-0.19	9.78	24
UNII6	6465	103	8.22	8.63	11.44	8.25	8.65	11.46	8.26	8.66	11.48	-3.96	-5.08	-1.49	9.99	24
	6545	119	8.13	8.68	11.42	8.05	8.54	11.31	8.07	8.44	11.26	-3.96	-5.08	-1.49	9.93	24
UNII7	6625	135	8.29	8.56	11.44	8.38	8.57	11.49	8.55	8.74	11.66	-3.96	-5.08	-1.49	10.17	24
	6705	151	8.91	8.74	11.84	8.88	8.72	11.81	8.81	8.58	11.71	-3.96	-5.08	-1.49	10.35	24
	6785	167	8.66	8.63	11.66	8.56	8.62	11.60	8.53	8.64	11.60	-3.96	-5.08	-1.49	10.17	24
UNII8	6865	183	8.65	7.74	11.23	8.54	7.76	11.18	8.39	7.86	11.14	-3.99	-5.26	-1.59	9.64	24
	6945	199	9.14	8.77	11.97	8.99	8.71	11.86	8.53	8.95	11.76	-3.99	-5.26	-1.59	10.38	24
	7025	215	8.60	9.39	12.02	8.44	9.33	11.92	7.73	9.10	11.48	-3.99	-5.26	-1.59	10.43	24

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	10.88	8.70	12.93	-	-	-	10.97	8.84	13.04	-2.45	-4.02	-0.19	12.85	24
	6145	39	10.58	9.05	12.89	-	-	-	10.55	9.31	12.99	-2.45	-4.02	-0.19	12.80	24
	6385	87	9.91	10.54	13.25	-	-	-	10.04	10.55	13.31	-2.45	-4.02	-0.19	13.12	24
UNII6	6465	103	11.68	12.04	14.87	-	-	-	11.79	12.03	14.92	-3.96	-5.08	-1.49	13.43	24
	6545	119	10.90	11.25	14.08	-	-	-	10.87	11.06	13.98	-3.96	-5.08	-1.49	12.59	24
UNII7	6625	135	11.33	11.22	14.29	-	-	-	11.49	11.31	14.41	-3.96	-5.08	-1.49	12.92	24
	6705	151	11.83	11.42	14.64	-	-	-	11.77	11.28	14.54	-3.96	-5.08	-1.49	13.15	24
	6785	167	11.61	11.38	14.50	-	-	-	11.50	11.43	14.48	-3.96	-5.08	-1.49	13.01	24
UNII8	6865	183	12.10	10.93	14.57	-	-	-	11.90	11.01	14.49	-3.99	-5.26	-1.59	12.98	24
	6945	199	12.10	11.77	14.95	-	-	-	11.70	11.89	14.81	-3.99	-5.26	-1.59	13.36	24
	7025	215	11.41	12.28	14.88	-	-	-	10.74	12.02	14.43	-3.99	-5.26	-1.59	13.29	24

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-	-	-	13.74	11.72	15.86	-	-	-	-2.45	-4.02	-0.19	15.67	24
	6145	39	-	-	-	13.63	12.17	15.97	-	-	-	-2.45	-4.02	-0.19	15.78	24
	6385	87	-	-	-	12.59	13.02	15.82	-	-	-	-2.45	-4.02	-0.19	15.63	24
UNII6	6465	103	-	-	-	13.71	14.07	16.91	-	-	-	-3.96	-5.08	-1.49	15.42	24
	6545	119	-	-	-	13.26	13.71	16.50	-	-	-	-3.96	-5.08	-1.49	15.01	24
UNII7	6625	135	-	-	-	13.71	13.86	16.79	-	-	-	-3.96	-5.08	-1.49	15.30	24
	6705	151	-	-	-	14.18	14.01	17.11	-	-	-	-3.96	-5.08	-1.49	15.62	24
	6785	167	-	-	-	13.86	13.93	16.91	-	-	-	-3.96	-5.08	-1.49	15.42	24
UNII8	6865	183	-	-	-	14.27	13.63	16.97	-	-	-	-3.99	-5.26	-1.59	15.38	24
	6945	199	-	-	-	13.76	13.70	16.74	-	-	-	-3.99	-5.26	-1.59	15.15	24
	7025	215	-	-	-	13.02	14.06	16.58	-	-	-	-3.99	-5.26	-1.59	14.99	24

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5985	7	-	-	-	13.25	12.50	15.90	-	-	-	-2.45	-4.02	-0.19	15.71	24
	6145	39	-	-	-	13.15	11.56	15.44	-	-	-	-2.45	-4.02	-0.19	15.25	24
	6385	87	-	-	-	12.54	12.23	15.40	-	-	-	-2.45	-4.02	-0.19	15.21	24
UNII6	6465	103	-	-	-	13.43	13.76	16.61	-	-	-	-3.96	-5.08	-1.49	15.12	24
	6545	119	-	-	-	13.01	13.43	16.23	-	-	-	-3.96	-5.08	-1.49	14.74	24
UNII7	6625	135	-	-	-	13.45	13.61	16.54	-	-	-	-3.96	-5.08	-1.49	15.05	24
	6705	151	-	-	-	13.94	13.72	16.84	-	-	-	-3.96	-5.08	-1.49	15.35	24
	6785	167	-	-	-	13.64	13.68	16.67	-	-	-	-3.96	-5.08	-1.49	15.18	24
UNII8	6865	183	-	-	-	13.97	13.36	16.69	-	-	-	-3.99	-5.26	-1.59	15.10	24
	6945	199	-	-	-	13.47	13.46	16.48	-	-	-	-3.99	-5.26	-1.59	14.89	24
	7025	215	-	-	-	12.68	13.82	16.30	-	-	-	-3.99	-5.26	-1.59	14.71	24

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-1.93	-3.48	0.38	-1.54	-3.37	0.65	-1.39	-3.04	0.87	-2.45	-4.02	-0.19	0.68	24
	6185	47	-1.66	-5.91	-0.27	-1.35	-5.31	0.12	-1.14	-4.79	0.42	-2.45	-4.02	-0.19	0.23	24
	6345	79	-1.15	-3.42	0.87	-1.05	-3.09	1.06	-1.10	-2.97	1.08	-2.45	-4.02	-0.19	0.89	24
UNII6	6505	111	-2.58	-2.53	0.46	-1.93	-2.32	0.89	-1.77	-2.63	0.83	-3.96	-5.08	-1.49	-0.60	24
UNII7	6665	143	-2.65	-2.49	0.44	-1.92	-2.40	0.86	-1.57	-2.38	1.06	-3.96	-5.08	-1.49	-0.43	24
UNII8	6825	175	-1.51	-2.93	0.85	-1.30	-2.69	1.07	-1.14	-2.71	1.16	-3.99	-5.26	-1.59	-0.43	24
	6985	207	-1.65	-2.78	0.83	-1.74	-2.50	0.91	-2.15	-2.40	0.74	-3.99	-5.26	-1.59	-0.68	24

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	0.26	1.06	3.69	0.64	1.36	4.03	0.82	1.47	4.17	-2.45	-4.02	-0.19	3.98	24
	6185	47	0.98	0.82	3.91	1.12	0.84	3.99	1.30	1.01	4.17	-2.45	-4.02	-0.19	3.98	24
	6345	79	0.06	0.70	3.40	0.02	0.79	3.43	-0.04	0.81	3.42	-2.45	-4.02	-0.19	3.24	24
UNII6	6505	111	-0.05	0.57	3.28	0.16	0.79	3.50	0.13	0.63	3.40	-3.96	-5.08	-1.49	2.01	24
UNII7	6665	143	0.26	0.50	3.39	0.56	0.65	3.61	0.74	0.93	3.85	-3.96	-5.08	-1.49	2.36	24
UNII8	6825	175	1.00	0.64	3.83	0.85	0.71	3.79	0.94	0.85	3.91	-3.99	-5.26	-1.59	2.32	24
	6985	207	0.86	0.47	3.68	0.58	0.50	3.55	0.22	0.82	3.54	-3.99	-5.26	-1.59	2.09	24

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	4.52	4.71	7.62	4.87	4.91	7.90	5.00	4.96	7.99	-2.45	-4.02	-0.19	7.80	24
	6185	47	5.06	4.06	7.59	5.14	4.19	7.70	5.28	4.39	7.87	-2.45	-4.02	-0.19	7.68	24
	6345	79	4.71	4.54	7.63	4.62	4.66	7.65	4.55	4.68	7.63	-2.45	-4.02	-0.19	7.46	24
UNII6	6505	111	4.47	4.59	7.54	4.67	4.72	7.71	4.66	4.64	7.66	-3.96	-5.08	-1.49	6.22	24
UNII7	6665	143	4.83	4.54	7.70	5.09	4.64	7.88	5.28	4.92	8.11	-3.96	-5.08	-1.49	6.62	24
UNII8	6825	175	5.22	4.49	7.88	5.09	4.50	7.82	5.15	4.61	7.90	-3.99	-5.26	-1.59	6.31	24
	6985	207	5.03	5.03	8.04	4.69	5.03	7.87	4.42	5.29	7.89	-3.99	-5.26	-1.59	6.45	24

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	8.17	6.73	10.52	8.32	6.62	10.56	8.68	6.89	10.89	-2.45	-4.02	-0.19	10.70	24
	6185	47	8.65	6.84	10.85	8.62	6.91	10.86	8.74	7.25	11.07	-2.45	-4.02	-0.19	10.88	24
	6345	79	8.11	7.65	10.89	8.00	7.69	10.86	7.99	7.90	10.95	-2.45	-4.02	-0.19	10.76	24
UNII6	6505	111	8.61	9.07	11.85	8.67	9.10	11.90	8.73	9.02	11.89	-3.96	-5.08	-1.49	10.41	24
UNII7	6665	143	8.81	8.95	11.89	8.94	8.96	11.96	9.18	9.20	12.20	-3.96	-5.08	-1.49	10.71	24
UNII8	6825	175	9.29	9.02	12.17	9.20	9.02	12.12	9.23	9.05	12.15	-3.99	-5.26	-1.59	10.58	24
	6985	207	9.18	8.87	12.04	9.02	8.82	11.93	8.58	9.02	11.81	-3.99	-5.26	-1.59	10.45	24

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	11.05	9.67	13.43	-	-	-	11.35	9.93	13.71	-2.45	-4.02	-0.19	13.52	24
	6185	47	11.53	9.81	13.76	-	-	-	11.69	9.96	13.92	-2.45	-4.02	-0.19	13.73	24
	6345	79	10.66	10.93	13.81	-	-	-	10.69	11.01	13.86	-2.45	-4.02	-0.19	13.67	24
UNII6	6505	111	11.48	11.96	14.73	-	-	-	11.57	11.94	14.77	-3.96	-5.08	-1.49	13.28	24
UNII7	6665	143	11.93	11.91	14.93	-	-	-	12.14	12.07	15.12	-3.96	-5.08	-1.49	13.63	24
UNII8	6825	175	12.19	11.86	15.04	-	-	-	12.12	11.86	15.00	-3.99	-5.26	-1.59	13.45	24
	6985	207	12.05	11.96	15.02	-	-	-	11.61	12.04	14.84	-3.99	-5.26	-1.59	13.43	24

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-	-	-	14.09	14.61	17.37	-	-	-	-2.45	-4.02	-0.19	17.18	24
	6185	47	-	-	-	14.53	13.94	17.25	-	-	-	-2.45	-4.02	-0.19	17.06	24
	6345	79	-	-	-	13.45	13.87	16.67	-	-	-	-2.45	-4.02	-0.19	16.48	24
UNII6	6505	111	-	-	-	13.47	13.96	16.73	-	-	-	-3.96	-5.08	-1.49	15.24	24
UNII7	6665	143	-	-	-	14.04	13.88	16.97	-	-	-	-3.96	-5.08	-1.49	15.48	24
UNII8	6825	175	-	-	-	14.14	13.75	16.96	-	-	-	-3.99	-5.26	-1.59	15.37	24
	6985	207	-	-	-	13.86	13.96	16.92	-	-	-	-3.99	-5.26	-1.59	15.33	24

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-1.44	-3.01	0.86	-1.54	-3.19	0.72	-2.04	-3.35	0.36	-2.45	-4.02	-0.19	0.67	24
	6185	47	-1.08	-4.78	0.46	-1.13	-4.45	0.53	-1.54	-4.58	0.21	-2.45	-4.02	-0.19	0.34	24
	6345	79	-1.05	-2.96	1.10	-1.02	-3.10	1.07	-1.08	-3.35	0.94	-2.45	-4.02	-0.19	0.91	24
UNII6	6505	111	-1.93	-2.76	0.69	-2.02	-3.44	0.34	-2.11	-3.50	0.26	-3.96	-5.08	-1.49	-0.80	24
UNII7	6665	143	-1.65	-2.43	0.99	-1.70	-2.93	0.74	-2.03	-3.50	0.31	-3.96	-5.08	-1.49	-0.50	24
UNII8	6825	175	-1.23	-2.80	1.07	-1.59	-2.84	0.84	-2.04	-3.10	0.47	-3.99	-5.26	-1.59	-0.52	24
	6985	207	-2.24	-2.49	0.65	-2.86	-3.00	0.08	-3.40	-3.46	-0.42	-3.99	-5.26	-1.59	-0.94	24

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	0.91	1.47	4.21	0.90	1.32	4.12	0.60	1.05	3.84	-2.45	-4.02	-0.19	4.02	24
	6185	47	1.30	1.07	4.20	1.40	1.31	4.36	1.17	1.10	4.14	-2.45	-4.02	-0.19	4.17	24
	6345	79	-0.16	0.72	3.31	-0.23	0.71	3.28	-0.10	0.78	3.37	-2.45	-4.02	-0.19	3.18	24
UNII6	6505	111	0.07	0.47	3.29	-0.08	0.23	3.08	-0.19	0.21	3.02	-3.96	-5.08	-1.49	1.80	24
UNII7	6665	143	0.77	0.85	3.82	0.71	0.65	3.69	0.43	0.46	3.46	-3.96	-5.08	-1.49	2.33	24
UNII8	6825	175	0.94	0.73	3.85	0.76	0.84	3.81	0.53	0.93	3.74	-3.99	-5.26	-1.59	2.26	24
	6985	207	0.55	1.20	3.89	0.08	0.97	3.56	-0.47	0.81	3.23	-3.99	-5.26	-1.59	2.30	24

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	5.08	3.60	7.41	5.09	3.64	7.44	4.94	3.63	7.34	-2.45	-4.02	-0.19	7.25	24
	6185	47	5.36	3.80	7.66	5.42	3.83	7.71	5.24	3.86	7.61	-2.45	-4.02	-0.19	7.52	24
	6345	79	4.42	4.58	7.51	4.39	4.60	7.51	4.52	4.68	7.61	-2.45	-4.02	-0.19	7.42	24
UNII6	6505	111	4.57	4.46	7.53	4.37	4.20	7.30	4.36	4.25	7.32	-3.96	-5.08	-1.49	6.04	24
UNII7	6665	143	5.27	4.85	8.08	5.21	4.70	7.97	4.99	4.53	7.78	-3.96	-5.08	-1.49	6.59	24
UNII8	6825	175	5.11	4.52	7.84	4.88	4.65	7.78	4.73	4.75	7.75	-3.99	-5.26	-1.59	6.25	24
	6985	207	4.29	5.19	7.77	3.67	4.90	7.34	3.62	4.78	7.25	-3.99	-5.26	-1.59	6.18	24

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	8.54	6.96	10.83	8.53	6.92	10.81	8.46	6.93	10.77	-2.45	-4.02	-0.19	10.64	24
	6185	47	8.59	7.32	11.01	8.53	7.45	11.03	8.56	7.73	11.17	-2.45	-4.02	-0.19	10.98	24
	6345	79	7.74	7.78	10.77	7.65	7.77	10.72	7.79	7.96	10.88	-2.45	-4.02	-0.19	10.69	24
UNII6	6505	111	8.54	8.81	11.69	8.42	8.64	11.54	8.43	8.66	11.56	-3.96	-5.08	-1.49	10.20	24
UNII7	6665	143	9.11	9.18	12.16	9.03	9.09	12.07	8.97	8.90	11.95	-3.96	-5.08	-1.49	10.67	24
UNII8	6825	175	9.15	9.10	12.14	9.04	9.11	12.09	8.87	9.33	12.12	-3.99	-5.26	-1.59	10.55	24
	6985	207	8.30	9.03	11.69	8.03	8.92	11.51	7.61	8.65	11.17	-3.99	-5.26	-1.59	10.10	24

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	11.41	10.13	13.83	-	-	-	11.38	10.11	13.80	-2.45	-4.02	-0.19	13.64	24
	6185	47	11.80	10.36	14.15	-	-	-	11.79	10.66	14.27	-2.45	-4.02	-0.19	14.08	24
	6345	79	10.96	11.12	14.05	-	-	-	10.99	11.24	14.13	-2.45	-4.02	-0.19	13.94	24
UNII6	6505	111	11.31	11.62	14.48	-	-	-	11.27	11.53	14.41	-3.96	-5.08	-1.49	12.99	24
UNII7	6665	143	12.14	12.09	15.13	-	-	-	12.03	11.90	14.97	-3.96	-5.08	-1.49	13.64	24
UNII8	6825	175	12.05	11.92	14.99	-	-	-	11.86	12.06	14.97	-3.99	-5.26	-1.59	13.40	24
	6985	207	11.12	12.08	14.64	-	-	-	10.65	11.78	14.26	-3.99	-5.26	-1.59	13.05	24

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-	-	-	14.29	14.62	17.47	-	-	-	-2.45	-4.02	-0.19	17.28	24
	6185	47	-	-	-	14.24	12.96	16.66	-	-	-	-2.45	-4.02	-0.19	16.47	24
	6345	79	-	-	-	13.19	13.82	16.53	-	-	-	-2.45	-4.02	-0.19	16.34	24
UNII6	6505	111	-	-	-	13.22	13.55	16.40	-	-	-	-3.96	-5.08	-1.49	14.91	24
UNII7	6665	143	-	-	-	14.09	13.88	17.00	-	-	-	-3.96	-5.08	-1.49	15.51	24
UNII8	6825	175	-	-	-	13.91	13.88	16.91	-	-	-	-3.99	-5.26	-1.59	15.32	24
	6985	207	-	-	-	12.93	13.94	16.48	-	-	-	-3.99	-5.26	-1.59	14.89	24

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-	-	-	12.56	13.06	15.83	-	-	-	-2.45	-4.02	-0.19	15.64	24
	6185	47	-	-	-	12.99	12.57	15.80	-	-	-	-2.45	-4.02	-0.19	15.61	24
	6345	79	-	-	-	11.79	12.33	15.08	-	-	-	-2.45	-4.02	-0.19	14.89	24
UNII6	6505	111	-	-	-	11.78	12.20	15.00	-	-	-	-3.96	-5.08	-1.49	13.51	24
UNII7	6665	143	-	-	-	12.46	12.34	15.41	-	-	-	-3.96	-5.08	-1.49	13.92	24
UNII8	6825	175	-	-	-	12.41	12.29	15.36	-	-	-	-3.99	-5.26	-1.59	13.77	24
	6985	207	-	-	-	11.73	12.35	15.06	-	-	-	-3.99	-5.26	-1.59	13.47	24

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6025	15	-	-	-	13.16	13.69	16.45	-	-	-	-2.45	-4.02	-0.19	16.26	24
	6185	47	-	-	-	13.55	13.17	16.37	-	-	-	-2.45	-4.02	-0.19	16.18	24
	6345	79	-	-	-	12.37	12.89	15.65	-	-	-	-2.45	-4.02	-0.19	15.46	24
UNII6	6505	111	-	-	-	12.34	12.76	15.56	-	-	-	-3.96	-5.08	-1.49	14.07	24
UNII7	6665	143	-	-	-	13.06	12.93	16.01	-	-	-	-3.96	-5.08	-1.49	14.52	24
UNII8	6825	175	-	-	-	13.02	12.86	15.95	-	-	-	-3.99	-5.26	-1.59	14.36	24
	6985	207	-	-	-	12.32	12.96	15.67	-	-	-	-3.99	-5.26	-1.59	14.08	24

Mode : EHT320(80LL) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-1.49	-3.60	0.59	-1.27	-3.72	0.68	-1.20	-4.10	0.60	-2.45	-4.02	-0.19	0.49	24
	6265	63	-1.77	-3.87	0.31	-1.43	-3.90	0.52	-1.29	-4.02	0.56	-2.45	-4.02	-0.19	0.37	24
UNII6	6425	95	-2.51	-2.55	0.48	-2.44	-2.45	0.56	-2.36	-2.30	0.68	-3.96	-5.08	-1.49	-0.81	24
	6585	127	-3.47	-2.98	-0.21	-2.90	-2.70	0.21	-2.56	-2.91	0.28	-3.96	-5.08	-1.49	-1.21	24
UNII8	6745	159	-2.82	-2.44	0.38	-2.03	-2.35	0.82	-1.54	-2.01	1.24	-3.99	-5.26	-1.59	-0.35	24
	6905	191	-2.27	-3.46	0.19	-2.04	-3.43	0.33	-1.67	-3.28	0.61	-3.99	-5.26	-1.59	-0.98	24

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	0.41	0.82	3.63	0.70	1.06	3.89	1.03	1.28	4.17	-2.45	-4.02	-0.19	3.98	24
	6265	63	0.18	0.22	3.21	0.24	0.17	3.21	0.57	0.50	3.55	-2.45	-4.02	-0.19	3.36	24
UNII6	6425	95	0.37	0.44	3.42	0.23	0.52	3.39	0.25	0.62	3.45	-3.96	-5.08	-1.49	1.96	24
	6585	127	0.06	0.59	3.34	0.25	0.73	3.51	0.21	0.66	3.45	-3.96	-5.08	-1.49	2.02	24
UNII8	6745	159	0.34	0.87	3.63	0.63	0.97	3.81	0.90	1.33	4.13	-3.99	-5.26	-1.59	2.54	24
	6905	191	1.13	-0.08	3.57	0.92	-0.12	3.44	1.15	0.14	3.68	-3.99	-5.26	-1.59	2.09	24

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	4.47	4.37	7.43	4.73	4.49	7.63	5.00	4.61	7.82	-2.45	-4.02	-0.19	7.63	24
	6265	63	4.27	3.68	6.99	4.36	3.72	7.06	4.63	4.01	7.34	-2.45	-4.02	-0.19	7.15	24
UNII6	6425	95	4.81	4.40	7.62	4.64	4.44	7.55	4.63	4.56	7.60	-3.96	-5.08	-1.49	6.13	24
	6585	127	4.52	4.64	7.59	4.63	4.69	7.67	4.65	4.63	7.65	-3.96	-5.08	-1.49	6.18	24
UNII8	6745	159	4.77	4.62	7.70	5.02	4.66	7.86	5.23	5.00	8.13	-3.99	-5.26	-1.59	6.54	24
	6905	191	5.44	4.11	7.83	5.25	4.05	7.71	5.44	4.24	7.89	-3.99	-5.26	-1.59	6.30	24

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	8.45	6.66	10.66	8.56	6.74	10.76	8.80	6.99	11.00	-2.45	-4.02	-0.19	10.81	24
	6265	63	8.51	6.80	10.75	8.45	6.83	10.73	8.65	7.27	11.02	-2.45	-4.02	-0.19	10.83	24
UNII6	6425	95	9.01	8.95	11.99	8.89	8.91	11.91	8.78	9.03	11.92	-3.96	-5.08	-1.49	10.50	24
	6585	127	8.60	9.23	11.94	8.64	9.25	11.97	8.66	9.14	11.92	-3.96	-5.08	-1.49	10.48	24
UNII8	6745	159	8.86	9.25	12.07	9.00	9.23	12.13	9.19	9.44	12.33	-3.99	-5.26	-1.59	10.74	24
	6905	191	9.64	8.59	12.16	9.50	8.57	12.07	9.51	8.58	12.08	-3.99	-5.26	-1.59	10.57	24

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	11.20	9.67	13.52	-	-	-	11.44	9.79	13.70	-2.45	-4.02	-0.19	13.51	24
	6265	63	11.54	9.96	13.83	-	-	-	11.66	10.28	14.03	-2.45	-4.02	-0.19	13.84	24
UNII6	6425	95	11.89	11.82	14.86	-	-	-	11.76	11.87	14.83	-3.96	-5.08	-1.49	13.37	24
	6585	127	11.65	12.14	14.91	-	-	-	11.66	12.05	14.87	-3.96	-5.08	-1.49	13.42	24
UNII8	6745	159	11.98	12.11	15.06	-	-	-	12.18	12.23	15.22	-3.99	-5.26	-1.59	13.63	24
	6905	191	12.63	11.61	15.16	-	-	-	12.54	11.59	15.10	-3.99	-5.26	-1.59	13.57	24

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-	-	-	14.19	14.21	17.21	-	-	-	-2.45	-4.02	-0.19	17.02	24
	6265	63	-	-	-	13.91	13.78	16.85	-	-	-	-2.45	-4.02	-0.19	16.66	24
UNII6	6425	95	-	-	-	13.84	13.92	16.89	-	-	-	-3.96	-5.08	-1.49	15.40	24
	6585	127	-	-	-	13.59	14.15	16.89	-	-	-	-3.96	-5.08	-1.49	15.40	24
UNII8	6745	159	-	-	-	14.11	14.15	17.14	-	-	-	-3.99	-5.26	-1.59	15.55	24
	6905	191	-	-	-	14.54	13.60	17.11	-	-	-	-3.99	-5.26	-1.59	15.52	24

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-2.36	-4.77	-0.39	-1.64	-5.23	-0.06	-1.54	-4.52	0.23	-2.45	-4.02	-0.19	0.04	24
	6265	63	-2.45	-4.79	-0.46	-1.70	-4.93	-0.01	-1.52	-3.84	0.48	-2.45	-4.02	-0.19	0.29	24
UNII6	6425	95	-2.64	-3.60	-0.09	-2.22	-3.01	0.41	-1.02	-2.20	1.44	-3.96	-5.08	-1.49	-0.05	24
	6585	127	-2.43	-3.01	0.30	-1.61	-2.68	0.90	-1.04	-2.15	1.45	-3.96	-5.08	-1.49	-0.04	24
UNII8	6745	159	-2.46	-3.32	0.14	-1.57	-2.76	0.88	-1.00	-2.33	1.40	-3.99	-5.26	-1.59	-0.19	24
	6905	191	-2.13	-3.88	0.10	-1.54	-2.96	0.82	-1.10	-2.19	1.40	-3.99	-5.26	-1.59	-0.19	24

Mode : EHT320(80LM) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	0.91	1.11	4.02	0.89	0.91	3.91	0.99	1.01	4.01	-2.45	-4.02	-0.19	3.83	24
	6265	63	0.41	0.42	3.43	0.50	0.64	3.58	0.63	0.76	3.70	-2.45	-4.02	-0.19	3.51	24
UNII6	6425	95	0.07	0.40	3.25	0.02	0.37	3.21	0.49	0.84	3.68	-3.96	-5.08	-1.49	2.19	24
	6585	127	0.08	0.38	3.24	-0.09	0.09	3.01	0.15	0.47	3.32	-3.96	-5.08	-1.49	1.83	24
UNII8	6745	159	0.79	1.09	3.95	0.70	0.90	3.81	0.74	1.04	3.90	-3.99	-5.26	-1.59	2.36	24
	6905	191	1.04	-0.10	3.52	0.77	-0.02	3.40	0.97	0.44	3.72	-3.99	-5.26	-1.59	2.13	24

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	4.69	4.26	7.49	4.61	4.14	7.39	4.67	4.15	7.43	-2.45	-4.02	-0.19	7.30	24
	6265	63	4.94	4.51	7.74	4.96	4.73	7.86	4.97	4.87	7.93	-2.45	-4.02	-0.19	7.74	24
UNII6	6425	95	4.40	4.36	7.39	4.32	4.33	7.33	4.76	4.74	7.76	-3.96	-5.08	-1.49	6.27	24
	6585	127	4.45	4.39	7.43	4.24	4.15	7.20	4.49	4.39	7.45	-3.96	-5.08	-1.49	5.96	24
UNII8	6745	159	5.17	4.91	8.05	5.05	4.72	7.90	5.10	4.82	7.97	-3.99	-5.26	-1.59	6.46	24
	6905	191	5.31	4.15	7.78	5.08	4.24	7.69	5.15	4.63	7.91	-3.99	-5.26	-1.59	6.32	24

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	8.83	7.16	11.09	8.80	7.14	11.06	8.71	7.11	10.99	-2.45	-4.02	-0.19	10.90	24
	6265	63	8.23	6.93	10.64	8.27	7.10	10.74	8.14	7.33	10.77	-2.45	-4.02	-0.19	10.58	24
UNII6	6425	95	8.58	8.94	11.78	8.52	8.89	11.72	8.73	9.07	11.91	-3.96	-5.08	-1.49	10.42	24
	6585	127	8.46	8.98	11.74	8.32	8.78	11.57	8.35	8.79	11.58	-3.96	-5.08	-1.49	10.25	24
UNII8	6745	159	9.14	9.48	12.33	9.07	9.35	12.23	8.96	9.17	12.08	-3.99	-5.26	-1.59	10.74	24
	6905	191	9.46	8.64	12.08	9.33	8.63	12.00	9.17	8.84	12.02	-3.99	-5.26	-1.59	10.49	24

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	11.51	9.71	13.72	-	-	-	11.41	9.67	13.64	-2.45	-4.02	-0.19	13.53	24
	6265	63	11.25	10.10	13.73	-	-	-	11.20	10.37	13.81	-2.45	-4.02	-0.19	13.62	24
UNII6	6425	95	11.53	11.77	14.66	-	-	-	11.60	11.89	14.76	-3.96	-5.08	-1.49	13.27	24
	6585	127	11.43	11.75	14.60	-	-	-	11.35	11.65	14.51	-3.96	-5.08	-1.49	13.11	24
UNII8	6745	159	12.12	12.28	15.21	-	-	-	12.05	12.07	15.07	-3.99	-5.26	-1.59	13.62	24
	6905	191	12.46	11.67	15.10	-	-	-	12.27	11.83	15.07	-3.99	-5.26	-1.59	13.51	24

Mode : EHT320(80LM) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	13.69	13.65	16.68	-	-	-	-2.45	-4.02	-0.19	16.49	24
	6265	63	-	-	-	14.08	14.20	17.15	-	-	-	-2.45	-4.02	-0.19	16.96	24
UNII6	6425	95	-	-	-	13.59	13.88	16.75	-	-	-	-3.96	-5.08	-1.49	15.26	24
	6585	127	-	-	-	13.32	13.73	16.54	-	-	-	-3.96	-5.08	-1.49	15.05	24
UNII8	6745	159	-	-	-	14.08	14.17	17.13	-	-	-	-3.99	-5.26	-1.59	15.54	24
	6905	191	-	-	-	14.25	13.70	16.99	-	-	-	-3.99	-5.26	-1.59	15.40	24

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-1.55	-4.46	0.24	-2.06	-5.05	-0.29	-2.29	-5.07	-0.45	-2.45	-4.02	-0.19	0.05	24
	6265	63	-1.52	-3.90	0.46	-2.14	-4.52	-0.16	-2.33	-4.87	-0.41	-2.45	-4.02	-0.19	0.27	24
UNII6	6425	95	-1.14	-2.23	1.36	-1.58	-3.28	0.66	-2.12	-4.11	0.01	-3.96	-5.08	-1.49	-0.13	24
	6585	127	-1.03	-2.02	1.51	-1.23	-3.25	0.89	-1.82	-3.49	0.43	-3.96	-5.08	-1.49	0.02	24
UNII8	6745	159	-1.10	-2.39	1.31	-2.00	-3.36	0.39	-2.18	-4.15	-0.05	-3.99	-5.26	-1.59	-0.28	24
	6905	191	-1.18	-2.16	1.37	-2.47	-3.04	0.27	-2.68	-3.59	-0.10	-3.99	-5.26	-1.59	-0.22	24

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	0.94	1.19	4.08	0.96	1.11	4.05	0.73	0.88	3.82	-2.45	-4.02	-0.19	3.89	24
	6265	63	0.55	0.84	3.71	0.36	0.85	3.62	-0.08	0.48	3.22	-2.45	-4.02	-0.19	3.52	24
UNII6	6425	95	0.54	0.92	3.74	0.65	1.01	3.84	0.21	0.47	3.35	-3.96	-5.08	-1.49	2.35	24
	6585	127	0.29	0.46	3.39	0.52	0.48	3.51	0.27	0.38	3.33	-3.96	-5.08	-1.49	2.02	24
UNII8	6745	159	0.76	1.05	3.92	0.54	0.99	3.78	0.23	0.70	3.48	-3.99	-5.26	-1.59	2.33	24
	6905	191	0.99	0.41	3.72	0.56	0.34	3.46	-0.14	0.26	3.07	-3.99	-5.26	-1.59	2.13	24

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	4.99	4.84	7.93	4.95	4.74	7.86	4.97	4.62	7.81	-2.45	-4.02	-0.19	7.74	24
	6265	63	4.95	4.86	7.92	4.84	4.86	7.86	4.51	4.65	7.59	-2.45	-4.02	-0.19	7.73	24
UNII6	6425	95	4.81	4.80	7.82	4.91	4.85	7.89	4.63	4.51	7.58	-3.96	-5.08	-1.49	6.40	24
	6585	127	4.59	4.41	7.51	4.76	4.45	7.62	4.66	4.45	7.57	-3.96	-5.08	-1.49	6.13	24
UNII8	6745	159	5.04	4.72	7.90	4.78	4.64	7.72	4.59	4.47	7.54	-3.99	-5.26	-1.59	6.31	24
	6905	191	5.15	4.56	7.87	4.70	4.44	7.58	4.17	4.48	7.34	-3.99	-5.26	-1.59	6.28	24

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	8.62	7.13	10.95	8.53	7.16	10.91	8.71	7.57	11.19	-2.45	-4.02	-0.19	11.00	24
	6265	63	8.47	7.92	11.21	8.35	7.94	11.16	8.28	8.11	11.21	-2.45	-4.02	-0.19	11.02	24
UNII6	6425	95	8.91	9.14	12.04	8.95	9.15	12.06	8.91	9.05	11.99	-3.96	-5.08	-1.49	10.57	24
	6585	127	8.45	8.73	11.60	8.58	8.71	11.65	8.77	8.92	11.86	-3.96	-5.08	-1.49	10.37	24
UNII8	6745	159	8.81	9.03	11.93	8.67	8.97	11.83	8.68	9.00	11.85	-3.99	-5.26	-1.59	10.34	24
	6905	191	9.08	8.75	11.93	8.90	8.67	11.80	8.39	8.82	11.62	-3.99	-5.26	-1.59	10.34	24

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	11.26	9.73	13.57	-	-	-	11.37	10.03	13.76	-2.45	-4.02	-0.19	13.57	24
	6265	63	10.95	10.51	13.75	-	-	-	10.84	10.53	13.70	-2.45	-4.02	-0.19	13.56	24
UNII6	6425	95	11.82	11.97	14.91	-	-	-	11.83	11.92	14.88	-3.96	-5.08	-1.49	13.42	24
	6585	127	11.49	11.59	14.55	-	-	-	11.69	11.69	14.70	-3.96	-5.08	-1.49	13.21	24
UNII8	6745	159	11.76	11.85	14.82	-	-	-	11.66	11.83	14.76	-3.99	-5.26	-1.59	13.23	24
	6905	191	12.04	11.73	14.89	-	-	-	11.58	11.76	14.68	-3.99	-5.26	-1.59	13.30	24

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.14	13.94	17.05	-	-	-	-2.45	-4.02	-0.19	16.86	24
	6265	63	-	-	-	13.67	14.05	16.88	-	-	-	-2.45	-4.02	-0.19	16.69	24
UNII6	6425	95	-	-	-	13.84	14.02	16.94	-	-	-	-3.96	-5.08	-1.49	15.45	24
	6585	127	-	-	-	13.49	13.67	16.59	-	-	-	-3.96	-5.08	-1.49	15.10	24
UNII8	6745	159	-	-	-	13.70	13.84	16.78	-	-	-	-3.99	-5.26	-1.59	15.19	24
	6905	191	-	-	-	13.73	13.69	16.72	-	-	-	-3.99	-5.26	-1.59	15.13	24

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-1.09	-3.19	0.99	-1.37	-3.24	0.81	-1.86	-3.46	0.42	-2.45	-4.02	-0.19	0.80	24
	6265	63	-1.57	-3.65	0.52	-1.66	-3.47	0.54	-1.41	-3.86	0.54	-2.45	-4.02	-0.19	0.35	24
UNII6	6425	95	-1.74	-2.72	0.80	-1.99	-2.61	0.72	-1.94	-2.54	0.78	-3.96	-5.08	-1.49	-0.69	24
	6585	127	-1.80	-2.92	0.68	-2.06	-2.65	0.66	-2.37	-2.79	0.44	-3.96	-5.08	-1.49	-0.81	24
UNII8	6745	159	-1.73	-3.12	0.64	-2.29	-3.42	0.20	-2.73	-3.29	0.01	-3.99	-5.26	-1.59	-0.95	24
	6905	191	-1.93	-3.02	0.57	-2.67	-2.94	0.20	-3.38	-3.24	-0.30	-3.99	-5.26	-1.59	-1.02	24

Mode : EHT320(80HH) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	1.01	1.20	4.12	1.05	1.36	4.22	0.76	1.14	3.97	-2.45	-4.02	-0.19	4.03	24
	6265	63	0.16	0.67	3.43	0.07	0.58	3.34	0.13	0.67	3.42	-2.45	-4.02	-0.19	3.24	24
UNII6	6425	95	0.48	0.60	3.55	0.21	0.26	3.25	0.14	0.26	3.21	-3.96	-5.08	-1.49	2.06	24
	6585	127	0.58	0.56	3.58	0.43	0.30	3.37	0.13	0.07	3.11	-3.96	-5.08	-1.49	2.09	24
UNII8	6745	159	0.53	0.82	3.69	0.24	0.89	3.59	0.06	0.99	3.56	-3.99	-5.26	-1.59	2.10	24
	6905	191	0.80	1.46	4.16	0.27	1.17	3.76	-0.30	1.00	3.41	-3.99	-5.26	-1.59	2.57	24

Mode : EHT320(80HH) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	4.91	4.88	7.91	4.98	4.83	7.92	4.84	4.91	7.89	-2.45	-4.02	-0.19	7.73	24
	6265	63	4.59	4.67	7.64	4.48	4.60	7.55	4.62	4.75	7.69	-2.45	-4.02	-0.19	7.50	24
UNII6	6425	95	4.69	4.41	7.56	4.43	4.15	7.30	4.43	4.16	7.31	-3.96	-5.08	-1.49	6.07	24
	6585	127	4.82	4.50	7.67	4.70	4.26	7.50	4.49	4.09	7.30	-3.96	-5.08	-1.49	6.18	24
UNII8	6745	159	4.74	4.52	7.65	4.48	4.59	7.55	4.36	4.73	7.56	-3.99	-5.26	-1.59	6.06	24
	6905	191	4.46	4.96	7.73	3.88	4.69	7.32	3.61	4.54	7.11	-3.99	-5.26	-1.59	6.14	24

Mode : EHT320(80HH) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	8.74	7.77	11.29	8.75	7.93	11.37	8.67	8.18	11.44	-2.45	-4.02	-0.19	11.25	24
	6265	63	8.04	8.03	11.05	7.95	8.03	11.00	8.12	8.25	11.20	-2.45	-4.02	-0.19	11.01	24
UNII6	6425	95	8.79	8.84	11.82	8.62	8.65	11.65	8.65	8.65	11.66	-3.96	-5.08	-1.49	10.33	24
	6585	127	8.74	8.93	11.85	8.69	8.81	11.76	8.58	8.63	11.61	-3.96	-5.08	-1.49	10.36	24
UNII8	6745	159	8.68	9.03	11.87	8.58	9.05	11.84	8.41	9.26	11.87	-3.99	-5.26	-1.59	10.28	24
	6905	191	8.23	8.87	11.57	7.95	8.71	11.36	7.65	8.43	11.07	-3.99	-5.26	-1.59	9.98	24

Mode : EHT320(80HH) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]	[dB]
UNII5	6105	31	11.44	10.51	14.01	-	-	-	11.41	10.68	14.07	-2.45	-4.02	-0.19	13.88	24
	6265	63	11.10	11.13	14.12	-	-	-	11.15	11.27	14.22	-2.45	-4.02	-0.19	14.03	24
UNII6	6425	95	11.57	11.58	14.58	-	-	-	11.49	11.46	14.48	-3.96	-5.08	-1.49	13.09	24
	6585	127	11.64	11.72	14.69	-	-	-	11.53	11.49	14.52	-3.96	-5.08	-1.49	13.20	24
UNII8	6745	159	11.59	11.90	14.76	-	-	-	11.41	12.05	14.75	-3.99	-5.26	-1.59	13.17	24
	6905	191	11.02	11.76	14.42	-	-	-	10.67	11.41	14.07	-3.99	-5.26	-1.59	12.83	24

Mode : EHT320(80HH) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
			[dBi]	[dBi]	[dBi]	[dBm]	[dBm]	[dBm]	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]	[dBm]	[dBm]	[dBm]
UNII5	6105	31	-	-	-	14.29	14.31	17.31	-	-	-	-2.45	-4.02	-0.19	17.12	24
	6265	63	-	-	-	13.37	14.00	16.70	-	-	-	-2.45	-4.02	-0.19	16.51	24
UNII6	6425	95	-	-	-	13.52	13.55	16.54	-	-	-	-3.96	-5.08	-1.49	15.05	24
	6585	127	-	-	-	13.50	13.66	16.59	-	-	-	-3.96	-5.08	-1.49	15.10	24
UNII8	6745	159	-	-	-	13.47	13.93	16.71	-	-	-	-3.99	-5.26	-1.59	15.12	24
	6905	191	-	-	-	12.69	13.58	16.17	-	-	-	-3.99	-5.26	-1.59	14.58	24

Mode : EHT320(160L) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-	-	-	13.21	13.23	16.23	-	-	-	-2.45	-4.02	-0.19	16.04	24
	6265	63	-	-	-	12.95	12.99	15.98	-	-	-	-2.45	-4.02	-0.19	15.79	24
UNII6	6425	95	-	-	-	12.67	12.83	15.76	-	-	-	-3.96	-5.08	-1.49	14.27	24
	6585	127	-	-	-	12.40	12.87	15.65	-	-	-	-3.96	-5.08	-1.49	14.16	24
UNII8	6745	159	-	-	-	13.08	13.12	16.11	-	-	-	-3.99	-5.26	-1.59	14.52	24
	6905	191	-	-	-	13.35	12.60	16.00	-	-	-	-3.99	-5.26	-1.59	14.41	24

Mode : EHT320(160U) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-	-	-	13.22	13.16	16.20	-	-	-	-2.45	-4.02	-0.19	16.01	24
	6265	63	-	-	-	12.59	13.05	15.83	-	-	-	-2.45	-4.02	-0.19	15.64	24
UNII6	6425	95	-	-	-	12.74	12.85	15.80	-	-	-	-3.96	-5.08	-1.49	14.31	24
	6585	127	-	-	-	12.55	12.72	15.64	-	-	-	-3.96	-5.08	-1.49	14.15	24
UNII8	6745	159	-	-	-	12.66	12.92	15.80	-	-	-	-3.99	-5.26	-1.59	14.21	24
	6905	191	-	-	-	12.33	12.68	15.52	-	-	-	-3.99	-5.26	-1.59	13.93	24

Mode : EHT320 4x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-	-	-	12.22	12.24	15.24	-	-	-	-2.45	-4.02	-0.19	15.05	24
	6265	63	-	-	-	12.49	12.27	15.39	-	-	-	-2.45	-4.02	-0.19	15.20	24
UNII6	6425	95	-	-	-	12.50	12.10	15.31	-	-	-	-3.96	-5.08	-1.49	13.82	24
	6585	127	-	-	-	12.51	12.14	15.34	-	-	-	-3.96	-5.08	-1.49	13.85	24
UNII8	6745	159	-	-	-	12.32	12.10	15.22	-	-	-	-3.99	-5.26	-1.59	13.63	24
	6905	191	-	-	-	12.50	12.21	15.37	-	-	-	-3.99	-5.26	-1.59	13.78	24

Mode : EHT320 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit [dBm]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-	-	-	13.67	13.63	16.66	-	-	-	-2.45	-4.02	-0.19	16.47	24
	6265	63	-	-	-	13.23	13.43	16.34	-	-	-	-2.45	-4.02	-0.19	16.15	24
UNII6	6425	95	-	-	-	13.17	13.28	16.24	-	-	-	-3.96	-5.08	-1.49	14.75	24
	6585	127	-	-	-	12.92	13.21	16.08	-	-	-	-3.96	-5.08	-1.49	14.59	24
UNII8	6745	159	-	-	-	13.37	13.44	16.41	-	-	-	-3.99	-5.26	-1.59	14.82	24
	6905	191	-	-	-	13.37	13.12	16.25	-	-	-	-3.99	-5.26	-1.59	14.66	24

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.P [dBm]	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	5935	2	-	-	-	7.25	6.20	9.77	-	-	-	-2.45	-4.02	-0.19	9.58	24
	6175	45	-	-	-	8.21	7.60	10.92	-	-	-	-2.45	-4.02	-0.19	10.73	24
	6415	93	-	-	-	7.10	7.71	10.42	-	-	-	-2.45	-4.02	-0.19	10.23	24
UNII6	6435	97	-	-	-	8.63	8.76	11.71	-	-	-	-3.96	-5.08	-1.49	10.22	24
	6475	105	-	-	-	8.51	8.76	11.65	-	-	-	-3.96	-5.08	-1.49	10.16	24
	6515	113	-	-	-	8.43	8.60	11.53	-	-	-	-3.96	-5.08	-1.49	10.04	24
UNII7	6535	117	-	-	-	8.32	8.51	11.43	-	-	-	-3.96	-5.08	-1.49	9.94	24
	6695	149	-	-	-	7.71	7.54	10.63	-	-	-	-3.96	-5.08	-1.49	9.14	24
	6855	181	-	-	-	7.63	7.42	10.53	-	-	-	-3.96	-5.08	-1.49	9.04	24
UNII8	6875	185	-	-	-	9.10	8.37	11.76	-	-	-	-3.99	-5.26	-1.59	10.17	24
	6995	209	-	-	-	8.31	8.87	11.61	-	-	-	-3.99	-5.26	-1.59	10.02	24
	7115	233	-	-	-	7.85	8.84	11.38	-	-	-	-3.99	-5.26	-1.59	9.79	24

[MRU]

Mode : EHT20 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5935	2	1.04	0.00	3.56	0.93	-0.08	3.47	1.04	0.08	3.60	-2.45	-4.02	-0.19	3.41	24
	6175	45	1.07	0.93	4.01	0.96	0.81	3.90	1.07	0.92	4.01	-2.45	-4.02	-0.19	3.82	24
	6415	93	0.40	0.71	3.57	0.29	0.60	3.45	0.42	0.75	3.59	-2.45	-4.02	-0.19	3.40	24
UNII6	6435	97	0.76	0.97	3.88	0.67	0.89	3.79	0.76	1.00	3.89	-3.96	-5.08	-1.49	2.40	24
	6475	105	0.69	1.03	3.87	0.59	0.92	3.77	0.71	1.01	3.87	-3.96	-5.08	-1.49	2.38	24
	6515	113	0.62	0.90	3.77	0.48	0.78	3.64	0.54	0.85	3.71	-3.96	-5.08	-1.49	2.28	24
UNII7	6535	117	0.50	0.72	3.62	0.38	0.61	3.51	0.47	0.71	3.60	-3.96	-5.08	-1.49	2.13	24
	6695	149	1.35	1.13	4.25	1.24	1.03	4.15	1.32	1.12	4.23	-3.96	-5.08	-1.49	2.76	24
	6855	181	1.52	0.95	4.25	1.39	0.85	4.14	1.46	1.02	4.25	-3.96	-5.08	-1.49	2.76	24
UNII8	6875	185	1.39	0.24	3.86	1.27	0.14	3.75	1.35	0.31	3.87	-3.99	-5.26	-1.59	2.28	24
	6995	209	0.72	0.86	3.80	0.58	0.75	3.67	0.65	0.87	3.77	-3.99	-5.26	-1.59	2.21	24
	7115	233	-0.34	0.73	3.24	-0.45	0.64	3.14	-0.34	0.85	3.30	-3.99	-5.26	-1.59	1.71	24

Mode : EHT20 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5935	2	4.83	3.70	7.31	-	-	-	4.86	3.76	7.35	-2.45	-4.02	-0.19	7.16	24
	6175	45	4.82	3.95	7.42	-	-	-	4.86	3.94	7.44	-2.45	-4.02	-0.19	7.25	24
	6415	93	3.73	4.32	7.05	-	-	-	3.78	4.35	7.08	-2.45	-4.02	-0.19	6.89	24
UNII6	6435	97	5.04	4.86	7.96	-	-	-	5.04	4.86	7.96	-3.96	-5.08	-1.49	6.47	24
	6475	105	5.00	4.88	7.95	-	-	-	5.01	4.87	7.95	-3.96	-5.08	-1.49	6.46	24
	6515	113	4.92	4.68	7.82	-	-	-	4.87	4.63	7.76	-3.96	-5.08	-1.49	6.33	24
UNII7	6535	117	4.82	4.61	7.72	-	-	-	4.81	4.59	7.71	-3.96	-5.08	-1.49	6.23	24
	6695	149	5.60	4.80	8.23	-	-	-	5.58	4.81	8.22	-3.96	-5.08	-1.49	6.74	24
	6855	181	5.62	4.54	8.12	-	-	-	5.55	4.61	8.11	-3.96	-5.08	-1.49	6.63	24
UNII8	6875	185	5.59	4.32	8.01	-	-	-	5.53	4.40	8.01	-3.99	-5.26	-1.59	6.42	24
	6995	209	4.68	5.20	7.96	-	-	-	4.61	5.21	7.93	-3.99	-5.26	-1.59	6.37	24
	7115	233	4.10	4.92	7.54	-	-	-	4.11	5.01	7.59	-3.99	-5.26	-1.59	6.00	24

Mode : EHT40 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5965	3	1.23	0.09	3.71	1.09	-0.06	3.56	1.34	0.15	3.79	-2.45	-4.02	-0.19	3.60	24
	6165	43	0.96	0.78	3.88	0.86	0.70	3.79	1.04	0.92	3.99	-2.45	-4.02	-0.19	3.80	24
	6405	91	0.20	1.04	3.65	0.14	0.94	3.57	0.35	1.17	3.79	-2.45	-4.02	-0.19	3.60	24
UNII6	6445	99	0.73	0.99	3.87	0.59	0.86	3.74	0.74	0.99	3.88	-3.96	-5.08	-1.49	2.39	24
	6485	107	0.51	1.00	3.77	0.36	0.86	3.63	0.55	0.97	3.77	-3.96	-5.08	-1.49	2.28	24
	6525	115	0.49	0.87	3.69	0.30	0.69	3.51	0.35	0.68	3.53	-3.96	-5.08	-1.49	2.20	24
UNII7	6565	123	0.34	0.59	3.48	0.20	0.48	3.35	0.38	0.63	3.52	-3.96	-5.08	-1.49	2.03	24
	6685	147	1.39	1.25	4.33	1.18	1.07	4.13	1.29	1.12	4.22	-3.96	-5.08	-1.49	2.84	24
	6845	179	1.51	0.97	4.26	1.32	0.86	4.11	1.32	1.03	4.18	-3.96	-5.08	-1.49	2.77	24
UNII8	6885	187	1.35	0.25	3.85	1.18	0.18	3.72	1.29	0.35	3.86	-3.99	-5.26	-1.59	2.27	24
	7005	211	0.66	0.83	3.76	0.44	0.72	3.59	0.28	0.69	3.50	-3.99	-5.26	-1.59	2.17	24
	7085	227	0.45	1.57	4.06	0.22	1.46	3.90	0.25	1.64	4.01	-3.99	-5.26	-1.59	2.47	24

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5965	3	4.85	3.71	7.33	4.76	3.60	7.23	4.98	3.78	7.43	-2.45	-4.02	-0.19	7.24	24
	6165	43	4.70	3.81	7.29	4.64	3.72	7.21	4.80	3.94	7.41	-2.45	-4.02	-0.19	7.22	24
	6405	91	3.64	4.12	6.90	3.57	4.04	6.82	3.81	4.23	7.04	-2.45	-4.02	-0.19	6.85	24
UNII6	6445	99	4.98	4.86	7.93	4.86	4.73	7.81	5.00	4.86	7.94	-3.96	-5.08	-1.49	6.45	24
	6485	107	4.86	4.86	7.87	4.76	4.74	7.76	4.99	4.86	7.94	-3.96	-5.08	-1.49	6.45	24
	6525	115	4.93	4.70	7.82	4.73	4.52	7.64	4.80	4.48	7.65	-3.96	-5.08	-1.49	6.33	24
UNII7	6565	123	4.78	4.54	7.67	4.64	4.43	7.54	4.78	4.56	7.69	-3.96	-5.08	-1.49	6.20	24
	6685	147	5.69	4.93	8.34	5.49	4.78	8.16	5.63	4.80	8.25	-3.96	-5.08	-1.49	6.85	24
	6845	179	5.66	4.55	8.15	5.46	4.49	8.01	5.43	4.62	8.05	-3.96	-5.08	-1.49	6.66	24
UNII8	6885	187	5.57	4.32	8.00	5.42	4.29	7.90	5.50	4.44	8.01	-3.99	-5.26	-1.59	6.42	24
	7005	211	4.68	5.19	7.95	4.48	5.07	7.80	4.31	5.03	7.70	-3.99	-5.26	-1.59	6.36	24
	7085	227	4.02	4.93	7.51	3.82	4.85	7.38	3.84	5.02	7.48	-3.99	-5.26	-1.59	5.92	24

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	1.28	0.20	3.78	1.34	0.25	3.84	1.62	0.36	4.04	-2.45	-4.02	-0.19	3.85	24
	6145	39	0.85	0.75	3.81	0.76	0.58	3.68	0.88	0.80	3.85	-2.45	-4.02	-0.19	3.66	24
	6385	87	0.27	0.93	3.62	0.16	0.85	3.53	0.31	1.01	3.68	-2.45	-4.02	-0.19	3.49	24
UNII6	6465	103	0.53	0.86	3.71	0.52	0.86	3.70	0.63	0.85	3.75	-3.96	-5.08	-1.49	2.26	24
	6545	119	0.45	0.73	3.60	0.28	0.52	3.41	0.29	0.46	3.39	-3.96	-5.08	-1.49	2.11	24
UNII7	6625	135	0.70	0.64	3.68	0.73	0.63	3.69	0.96	0.80	3.89	-3.96	-5.08	-1.49	2.40	24
	6705	151	1.34	1.13	4.25	1.21	0.99	4.11	1.16	0.89	4.03	-3.96	-5.08	-1.49	2.76	24
	6785	167	1.12	1.06	4.10	0.90	0.92	3.92	0.91	0.90	3.91	-3.96	-5.08	-1.49	2.61	24
UNII8	6865	183	1.56	0.12	3.91	1.34	0.14	3.80	1.21	0.22	3.75	-3.99	-5.26	-1.59	2.32	24
	6945	199	1.18	0.16	3.71	0.91	0.16	3.56	0.50	0.38	3.45	-3.99	-5.26	-1.59	2.12	24
	7025	215	0.73	0.93	3.84	0.31	0.71	3.52	-0.39	0.57	3.13	-3.99	-5.26	-1.59	2.25	24

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	4.43	3.34	6.93	4.53	3.39	7.01	4.77	3.49	7.19	-2.45	-4.02	-0.19	7.00	24
	6145	39	4.52	3.74	7.16	4.46	3.56	7.04	4.62	3.81	7.24	-2.45	-4.02	-0.19	7.05	24
	6385	87	3.60	4.00	6.82	3.53	3.94	6.75	3.69	4.12	6.92	-2.45	-4.02	-0.19	6.73	24
UNII6	6465	103	4.79	4.77	7.79	4.79	4.74	7.77	4.82	4.72	7.78	-3.96	-5.08	-1.49	6.30	24
	6545	119	4.68	4.66	7.68	4.54	4.43	7.50	4.55	4.37	7.47	-3.96	-5.08	-1.49	6.19	24
UNII7	6625	135	4.96	4.56	7.78	5.03	4.56	7.81	5.20	4.74	7.99	-3.96	-5.08	-1.49	6.50	24
	6705	151	5.54	4.83	8.21	5.44	4.69	8.09	5.33	4.59	7.98	-3.96	-5.08	-1.49	6.72	24
	6785	167	5.30	4.70	8.02	5.09	4.60	7.86	5.10	4.54	7.84	-3.96	-5.08	-1.49	6.53	24
UNII8	6865	183	5.70	4.23	8.04	5.49	4.28	7.94	5.35	4.36	7.89	-3.99	-5.26	-1.59	6.45	24
	6945	199	5.33	4.28	7.85	5.04	4.27	7.68	4.64	4.51	7.59	-3.99	-5.26	-1.59	6.26	24
	7025	215	4.68	5.24	7.98	4.29	5.06	7.70	3.58	4.91	7.31	-3.99	-5.26	-1.59	6.39	24

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	5985	7	10.92	10.33	13.65	10.99	10.31	13.67	10.89	10.27	13.60	-2.45	-4.02	-0.19	13.48	24
	6145	39	10.60	10.43	13.52	10.63	10.46	13.55	10.57	10.39	13.49	-2.45	-4.02	-0.19	13.36	24
	6385	87	10.13	10.68	13.42	10.15	10.69	13.44	10.13	10.64	13.40	-2.45	-4.02	-0.19	13.25	24
UNII6	6465	103	11.85	12.07	14.97	11.83	12.06	14.96	11.83	12.04	14.95	-3.96	-5.08	-1.49	13.48	24
	6545	119	11.20	11.35	14.29	11.22	11.41	14.32	11.21	11.42	14.33	-3.96	-5.08	-1.49	12.84	24
UNII7	6625	135	11.71	11.54	14.64	11.63	11.52	14.59	11.60	11.46	14.54	-3.96	-5.08	-1.49	13.15	24
	6705	151	12.05	11.57	14.83	12.03	11.59	14.83	12.05	11.62	14.85	-3.96	-5.08	-1.49	13.36	24
	6785	167	11.76	11.44	14.62	11.79	11.46	14.64	11.82	11.50	14.67	-3.96	-5.08	-1.49	13.18	24
UNII8	6865	183	12.08	11.20	14.68	12.13	11.21	14.71	12.17	11.16	14.71	-3.99	-5.26	-1.59	13.12	24
	6945	199	12.11	11.74	14.94	12.14	11.73	14.95	12.26	11.66	14.98	-3.99	-5.26	-1.59	13.39	24
	7025	215	11.23	11.92	14.60	11.30	11.99	14.67	11.49	12.04	14.78	-3.99	-5.26	-1.59	13.19	24

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	0.52	1.23	3.90	0.68	1.37	4.05	0.92	1.44	4.20	-2.45	-4.02	-0.19	4.01	24
	6185	47	1.21	0.71	3.98	1.23	0.68	3.97	1.43	0.99	4.23	-2.45	-4.02	-0.19	4.04	24
	6345	79	0.25	0.65	3.46	0.21	0.70	3.47	0.15	0.75	3.47	-2.45	-4.02	-0.19	3.28	24
UNII6	6505	111	0.17	0.66	3.43	0.27	0.72	3.51	0.26	0.64	3.46	-3.96	-5.08	-1.49	2.02	24
UNII7	6665	143	0.54	0.51	3.54	0.76	0.69	3.73	0.92	0.83	3.88	-3.96	-5.08	-1.49	2.39	24
UNII8	6825	175	1.18	0.59	3.91	1.09	0.64	3.88	1.18	0.67	3.94	-3.99	-5.26	-1.59	2.35	24
	6985	207	1.11	0.29	3.73	0.96	0.39	3.69	0.50	0.57	3.54	-3.99	-5.26	-1.59	2.14	24

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	4.51	4.67	7.60	4.71	4.82	7.78	4.95	4.90	7.93	-2.45	-4.02	-0.19	7.74	24
	6185	47	5.03	3.98	7.55	5.07	3.95	7.55	5.25	4.27	7.80	-2.45	-4.02	-0.19	7.61	24
	6345	79	4.77	4.41	7.60	4.73	4.45	7.60	4.64	4.52	7.59	-2.45	-4.02	-0.19	7.41	24
UNII6	6505	111	4.54	4.53	7.54	4.62	4.60	7.62	4.55	4.48	7.53	-3.96	-5.08	-1.49	6.13	24
UNII7	6665	143	4.88	4.42	7.67	5.12	4.60	7.88	5.26	4.78	8.03	-3.96	-5.08	-1.49	6.54	24
UNII8	6825	175	5.08	4.30	7.72	5.03	4.34	7.71	5.15	4.36	7.78	-3.99	-5.26	-1.59	6.19	24
	6985	207	5.08	4.74	7.93	4.93	4.84	7.90	4.46	5.02	7.76	-3.99	-5.26	-1.59	6.34	24

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	10.29	10.92	13.62	10.25	10.87	13.58	10.15	10.83	13.51	-2.45	-4.02	-0.19	13.43	24
	6185	47	10.71	10.26	13.50	10.69	10.27	13.49	10.58	10.14	13.37	-2.45	-4.02	-0.19	13.31	24
	6345	79	10.15	10.58	13.38	10.16	10.56	13.37	10.19	10.51	13.36	-2.45	-4.02	-0.19	13.19	24
UNII6	6505	111	11.60	11.95	14.79	11.56	11.93	14.75	11.55	11.95	14.76	-3.96	-5.08	-1.49	13.30	24
UNII7	6665	143	12.25	12.05	15.16	12.19	12.01	15.11	12.07	11.93	15.01	-3.96	-5.08	-1.49	13.67	24
UNII8	6825	175	12.25	11.72	15.00	12.23	11.73	15.00	12.16	11.69	14.94	-3.99	-5.26	-1.59	13.41	24
	6985	207	11.88	11.91	14.91	11.91	11.87	14.90	12.04	11.81	14.94	-3.99	-5.26	-1.59	13.35	24

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	0.97	1.53	4.27	0.87	1.34	4.12	0.78	1.18	4.00	-2.45	-4.02	-0.19	4.08	24
	6185	47	1.43	1.14	4.30	1.46	1.18	4.33	1.30	1.21	4.27	-2.45	-4.02	-0.19	4.14	24
	6345	79	-0.06	0.76	3.38	-0.11	0.68	3.31	0.09	0.91	3.53	-2.45	-4.02	-0.19	3.34	24
UNII6	6505	111	0.11	0.49	3.32	-0.06	0.27	3.12	0.02	0.28	3.16	-3.96	-5.08	-1.49	1.83	24
UNII7	6665	143	0.89	0.81	3.86	0.77	0.65	3.72	0.58	0.49	3.55	-3.96	-5.08	-1.49	2.37	24
UNII8	6825	175	1.12	0.72	3.94	1.05	0.83	3.95	0.87	0.86	3.87	-3.99	-5.26	-1.59	2.36	24
	6985	207	0.99	1.09	4.05	0.57	0.86	3.72	-0.15	0.63	3.27	-3.99	-5.26	-1.59	2.46	24

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	5.03	4.96	8.00	4.97	4.76	7.88	4.88	4.58	7.74	-2.45	-4.02	-0.19	7.81	24
	6185	47	5.33	4.41	7.90	5.38	4.45	7.95	5.21	4.46	7.86	-2.45	-4.02	-0.19	7.76	24
	6345	79	4.58	4.46	7.53	4.49	4.44	7.47	4.66	4.63	7.65	-2.45	-4.02	-0.19	7.46	24
UNII6	6505	111	4.63	4.33	7.50	4.44	4.13	7.30	4.49	4.11	7.31	-3.96	-5.08	-1.49	6.01	24
UNII7	6665	143	5.37	4.72	8.07	5.25	4.57	7.93	5.11	4.41	7.79	-3.96	-5.08	-1.49	6.58	24
UNII8	6825	175	5.23	4.37	7.83	5.07	4.44	7.78	4.90	4.48	7.70	-3.99	-5.26	-1.59	6.24	24
	6985	207	4.42	4.95	7.71	4.01	4.78	7.42	3.57	4.57	7.11	-3.99	-5.26	-1.59	6.12	24

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	10.49	10.81	13.67	10.48	10.82	13.66	10.49	10.83	13.67	-2.45	-4.02	-0.19	13.48	24
	6185	47	10.98	10.62	13.81	10.94	10.58	13.77	10.93	10.54	13.75	-2.45	-4.02	-0.19	13.62	24
	6345	79	10.10	10.59	13.36	10.09	10.58	13.35	10.04	10.49	13.28	-2.45	-4.02	-0.19	13.17	24
UNII6	6505	111	11.50	11.53	14.52	11.50	11.56	14.54	11.44	11.52	14.49	-3.96	-5.08	-1.49	13.05	24
UNII7	6665	143	12.30	11.91	15.12	12.31	11.92	15.13	12.31	11.96	15.15	-3.96	-5.08	-1.49	13.66	24
UNII8	6825	175	12.14	11.92	15.04	12.18	11.87	15.04	12.19	11.80	15.01	-3.99	-5.26	-1.59	13.45	24
	6985	207	10.94	11.67	14.33	11.01	11.72	14.39	11.21	11.75	14.49	-3.99	-5.26	-1.59	12.90	24

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6025	15	13.43	13.75	16.60	13.32	13.68	16.52	13.34	13.76	16.56	-2.45	-4.02	-0.19	16.41	24
	6185	47	13.94	13.77	16.87	13.88	13.69	16.80	13.81	13.60	16.72	-2.45	-4.02	-0.19	16.68	24
	6345	79	13.02	13.35	16.20	13.06	13.31	16.20	13.06	13.32	16.20	-2.45	-4.02	-0.19	16.01	24
UNII6	6505	111	13.46	13.70	16.59	13.49	13.70	16.61	13.52	13.87	16.71	-3.96	-5.08	-1.49	15.22	24
UNII7	6665	143	14.31	13.90	17.12	14.30	13.87	17.10	14.28	13.91	17.11	-3.96	-5.08	-1.49	15.63	24
UNII8	6825	175	14.21	13.72	16.99	14.23	13.74	17.00	14.29	13.66	17.00	-3.99	-5.26	-1.59	15.41	24
	6985	207	13.39	13.79	16.61	13.53	13.72	16.64	13.90	13.84	16.88	-3.99	-5.26	-1.59	15.29	24

Mode : EHT320(80LL) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	0.60	1.01	3.82	0.81	1.11	3.97	1.07	1.22	4.16	-2.45	-4.02	-0.19	3.97	24
	6265	63	0.36	0.11	3.25	0.40	0.05	3.24	0.67	0.44	3.56	-2.45	-4.02	-0.19	3.37	24
UNII6	6425	95	0.51	0.44	3.49	0.44	0.45	3.45	0.39	0.54	3.48	-3.96	-5.08	-1.49	2.00	24
	6585	127	0.27	0.71	3.51	0.35	0.72	3.55	0.32	0.56	3.45	-3.96	-5.08	-1.49	2.06	24
UNII8	6745	159	0.62	0.85	3.75	0.82	1.01	3.93	1.02	1.18	4.11	-3.99	-5.26	-1.59	2.52	24
	6905	191	1.36	-0.14	3.69	1.25	-0.19	3.60	1.33	-0.07	3.70	-3.99	-5.26	-1.59	2.11	24

Mode : EHT320(80LL) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	4.57	4.28	7.43	4.78	4.44	7.62	4.82	4.53	7.69	-2.45	-4.02	-0.19	7.50	24
	6265	63	4.54	3.82	7.20	4.61	3.72	7.20	4.81	4.15	7.51	-2.45	-4.02	-0.19	7.32	24
UNII6	6425	95	4.99	4.45	7.74	4.93	4.65	7.80	4.82	4.67	7.75	-3.96	-5.08	-1.49	6.31	24
	6585	127	4.72	4.82	7.78	4.77	4.89	7.84	4.70	4.77	7.75	-3.96	-5.08	-1.49	6.35	24
UNII8	6745	159	4.97	4.73	7.86	5.22	4.86	8.06	5.38	5.07	8.24	-3.99	-5.26	-1.59	6.65	24
	6905	191	5.58	4.18	7.95	5.46	4.15	7.86	5.62	4.24	8.00	-3.99	-5.26	-1.59	6.41	24

Mode : EHT320(80LL) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	10.38	10.60	13.50	10.35	10.58	13.48	10.26	10.56	13.42	-2.45	-4.02	-0.19	13.31	24
	6265	63	9.92	9.71	12.82	9.92	9.73	12.84	9.86	9.63	12.76	-2.45	-4.02	-0.19	12.65	24
UNII6	6425	95	11.79	11.87	14.84	11.81	11.84	14.83	11.84	11.81	14.84	-3.96	-5.08	-1.49	13.35	24
	6585	127	11.64	12.04	14.86	11.62	12.04	14.85	11.65	12.09	14.88	-3.96	-5.08	-1.49	13.39	24
UNII8	6745	159	12.20	12.20	15.21	12.13	12.18	15.17	12.06	12.15	15.12	-3.99	-5.26	-1.59	13.62	24
	6905	191	12.57	11.47	15.07	12.61	11.50	15.10	12.58	11.49	15.08	-3.99	-5.26	-1.59	13.51	24

Mode : EHT320(80LM) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	0.96	1.22	4.10	1.03	1.22	4.14	0.91	1.05	3.99	-2.45	-4.02	-0.19	3.95	24
	6265	63	0.56	0.55	3.57	0.78	0.76	3.78	0.57	0.75	3.67	-2.45	-4.02	-0.19	3.59	24
UNII6	6425	95	0.16	0.49	3.34	0.25	0.65	3.46	0.49	0.84	3.68	-3.96	-5.08	-1.49	2.19	24
	6585	127	0.07	0.43	3.26	0.07	0.35	3.22	0.22	0.35	3.29	-3.96	-5.08	-1.49	1.80	24
UNII8	6745	159	0.91	1.12	4.02	0.93	1.15	4.05	0.76	1.00	3.89	-3.99	-5.26	-1.59	2.46	24
	6905	191	1.20	-0.11	3.61	1.23	0.19	3.75	1.04	0.22	3.66	-3.99	-5.26	-1.59	2.16	24

Mode : EHT320(80LM) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	4.89	4.53	7.73	4.98	4.54	7.78	4.84	4.36	7.62	-2.45	-4.02	-0.19	7.59	24
	6265	63	5.25	4.72	8.00	5.46	4.93	8.22	5.23	4.94	8.10	-2.45	-4.02	-0.19	8.03	24
UNII6	6425	95	4.58	4.50	7.55	4.67	4.64	7.67	4.88	4.84	7.87	-3.96	-5.08	-1.49	6.38	24
	6585	127	4.51	4.52	7.52	4.51	4.47	7.50	4.63	4.48	7.57	-3.96	-5.08	-1.49	6.08	24
UNII8	6745	159	5.27	4.92	8.11	5.34	4.94	8.15	5.14	4.81	7.99	-3.99	-5.26	-1.59	6.56	24
	6905	191	5.49	4.18	7.90	5.55	4.44	8.04	5.37	4.52	7.97	-3.99	-5.26	-1.59	6.45	24

Mode : EHT320(80LM) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	10.40	10.49	13.46	10.40	10.49	13.46	10.45	10.55	13.51	-2.45	-4.02	-0.19	13.32	24
	6265	63	10.69	10.61	13.66	10.69	10.59	13.65	10.72	10.57	13.66	-2.45	-4.02	-0.19	13.47	24
UNII6	6425	95	11.69	11.88	14.79	11.67	11.86	14.78	11.58	11.77	14.69	-3.96	-5.08	-1.49	13.30	24
	6585	127	11.41	11.59	14.51	11.38	11.63	14.52	11.36	11.63	14.51	-3.96	-5.08	-1.49	13.03	24
UNII8	6745	159	12.07	12.07	15.08	12.10	12.06	15.09	12.16	12.12	15.15	-3.99	-5.26	-1.59	13.56	24
	6905	191	12.43	11.64	15.06	12.46	11.62	15.07	12.50	11.56	15.06	-3.99	-5.26	-1.59	13.48	24

Mode : EHT320(80MH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	0.85	1.01	3.95	0.64	0.68	3.67	0.92	0.99	3.96	-2.45	-4.02	-0.19	3.77	24
	6265	63	0.48	0.75	3.63	0.19	0.50	3.36	0.08	0.50	3.31	-2.45	-4.02	-0.19	3.44	24
UNII6	6425	95	0.55	0.92	3.75	0.37	0.67	3.53	0.26	0.56	3.42	-3.96	-5.08	-1.49	2.26	24
	6585	127	0.27	0.36	3.33	0.26	0.24	3.26	0.41	0.41	3.42	-3.96	-5.08	-1.49	1.93	24
UNII8	6745	159	0.71	0.91	3.82	0.34	0.62	3.50	0.40	0.63	3.53	-3.99	-5.26	-1.59	2.23	24
	6905	191	1.01	0.16	3.61	0.57	-0.03	3.29	0.17	0.21	3.20	-3.99	-5.26	-1.59	2.02	24

Mode : EHT320(80MH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.37	4.85	8.13	5.11	4.48	7.82	5.36	4.77	8.08	-2.45	-4.02	-0.19	7.94	24
	6265	63	5.13	4.87	8.01	4.80	4.62	7.72	4.70	4.69	7.70	-2.45	-4.02	-0.19	7.82	24
UNII6	6425	95	5.01	4.90	7.97	4.78	4.70	7.75	4.67	4.56	7.62	-3.96	-5.08	-1.49	6.48	24
	6585	127	4.75	4.44	7.61	4.69	4.34	7.53	4.86	4.46	7.68	-3.96	-5.08	-1.49	6.19	24
UNII8	6745	159	5.11	4.70	7.92	4.71	4.43	7.58	4.78	4.45	7.63	-3.99	-5.26	-1.59	6.33	24
	6905	191	5.34	4.41	7.91	4.87	4.25	7.58	4.41	4.39	7.41	-3.99	-5.26	-1.59	6.32	24

Mode : EHT320(80MH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	11.25	11.06	14.17	11.27	11.07	14.18	11.16	10.98	14.08	-2.45	-4.02	-0.19	13.99	24
	6265	63	10.79	11.01	13.91	10.84	11.01	13.93	10.84	10.98	13.92	-2.45	-4.02	-0.19	13.74	24
UNII6	6425	95	11.86	11.98	14.93	11.83	11.96	14.90	11.82	11.99	14.91	-3.96	-5.08	-1.49	13.44	24
	6585	127	11.78	11.73	14.77	11.71	11.69	14.71	11.66	11.66	14.67	-3.96	-5.08	-1.49	13.28	24
UNII8	6745	159	11.79	11.79	14.80	11.78	11.80	14.80	11.79	11.82	14.82	-3.99	-5.26	-1.59	13.23	24
	6905	191	11.87	11.64	14.77	11.89	11.65	14.78	12.04	11.62	14.84	-3.99	-5.26	-1.59	13.25	24

Mode : EHT320(80HH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	1.09	1.20	4.16	1.04	1.18	4.12	0.88	1.20	4.05	-2.45	-4.02	-0.19	3.97	24
	6265	63	0.03	0.63	3.35	-0.08	0.48	3.22	0.19	0.73	3.48	-2.45	-4.02	-0.19	3.29	24
UNII6	6425	95	0.34	0.54	3.45	0.09	0.25	3.18	0.24	0.26	3.26	-3.96	-5.08	-1.49	1.96	24
	6585	127	0.53	0.49	3.52	0.34	0.28	3.32	0.18	0.12	3.16	-3.96	-5.08	-1.49	2.03	24
UNII8	6745	159	0.54	0.79	3.67	0.38	0.79	3.60	0.20	0.86	3.56	-3.99	-5.26	-1.59	2.08	24
	6905	191	1.14	1.38	4.27	0.66	1.09	3.89	-0.10	0.88	3.43	-3.99	-5.26	-1.59	2.68	24

Mode : EHT320(80HH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	5.51	5.04	8.29	5.50	4.99	8.26	5.32	5.03	8.19	-2.45	-4.02	-0.19	8.10	24
	6265	63	4.66	4.77	7.72	4.54	4.69	7.63	4.81	4.93	7.88	-2.45	-4.02	-0.19	7.69	24
UNII6	6425	95	4.69	4.61	7.66	4.47	4.27	7.38	4.62	4.30	7.47	-3.96	-5.08	-1.49	6.17	24
	6585	127	4.98	4.59	7.80	4.76	4.40	7.59	4.58	4.20	7.40	-3.96	-5.08	-1.49	6.31	24
UNII8	6745	159	4.93	4.60	7.78	4.70	4.62	7.67	4.53	4.67	7.61	-3.99	-5.26	-1.59	6.19	24
	6905	191	4.92	4.98	7.96	4.45	4.70	7.59	3.74	4.55	7.18	-3.99	-5.26	-1.59	6.37	24

Mode : EHT320(80HH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	11.40	11.41	14.42	11.37	11.36	14.37	11.42	11.36	14.40	-2.45	-4.02	-0.19	14.23	24
	6265	63	10.64	10.99	13.83	10.63	11.00	13.83	10.55	10.92	13.75	-2.45	-4.02	-0.19	13.64	24
UNII6	6425	95	11.56	11.51	14.55	11.56	11.55	14.57	11.53	11.54	14.55	-3.96	-5.08	-1.49	13.08	24
	6585	127	11.64	11.56	14.61	11.68	11.60	14.65	11.72	11.63	14.69	-3.96	-5.08	-1.49	13.20	24
UNII8	6745	159	11.56	11.94	14.76	11.61	11.88	14.76	11.65	11.87	14.77	-3.99	-5.26	-1.59	13.18	24
	6905	191	10.64	11.39	14.04	10.76	11.44	14.13	10.96	11.53	14.26	-3.99	-5.26	-1.59	12.67	24

Mode : EHT320(160L) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	13.28	13.29	16.30	13.23	13.26	16.25	13.25	13.31	16.29	-2.45	-4.02	-0.19	16.11	24
	6265	63	13.49	13.59	16.55	13.46	13.52	16.50	13.42	13.41	16.43	-2.45	-4.02	-0.19	16.36	24
UNII6	6425	95	13.72	13.93	16.84	13.91	13.90	16.92	13.86	13.84	16.86	-3.96	-5.08	-1.49	15.43	24
	6585	127	13.48	13.73	16.62	13.54	13.75	16.65	13.59	13.87	16.74	-3.96	-5.08	-1.49	15.25	24
UNII8	6745	159	14.27	14.02	17.16	14.20	14.00	17.11	14.24	14.10	17.18	-3.99	-5.26	-1.59	15.59	24
	6905	191	14.51	13.44	17.02	14.51	13.45	17.02	14.60	13.39	17.05	-3.99	-5.26	-1.59	15.46	24

Mode : EHT320(160U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	13.99	13.96	16.99	13.93	13.86	16.91	13.94	13.83	16.90	-2.45	-4.02	-0.19	16.80	24
	6265	63	13.61	13.81	16.72	13.69	13.79	16.75	13.75	13.78	16.78	-2.45	-4.02	-0.19	16.59	24
UNII6	6425	95	13.79	13.68	16.75	13.82	13.72	16.78	13.88	13.90	16.90	-3.96	-5.08	-1.49	15.41	24
	6585	127	13.74	13.60	16.68	13.63	13.56	16.61	13.71	13.65	16.69	-3.96	-5.08	-1.49	15.20	24
UNII8	6745	159	13.76	13.71	16.74	13.80	13.75	16.79	13.88	13.71	16.81	-3.99	-5.26	-1.59	15.22	24
	6905	191	13.14	13.41	16.29	13.39	13.38	16.40	13.75	13.53	16.65	-3.99	-5.26	-1.59	15.06	24

Mode : EHT320 3x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	13.33	13.07	16.21	13.32	13.13	16.24	13.28	13.10	16.20	-2.45	-4.02	-0.19	16.05	24
	6265	63	12.85	13.00	15.93	12.80	12.89	15.86	12.97	12.91	15.95	-2.45	-4.02	-0.19	15.76	24
UNII6	6425	95	12.79	12.73	15.77	12.87	12.76	15.82	12.94	12.81	15.88	-3.96	-5.08	-1.49	14.39	24
	6585	127	12.61	12.56	15.60	12.73	12.75	15.75	12.56	12.71	15.65	-3.96	-5.08	-1.49	14.26	24
UNII8	6745	159	12.97	12.80	15.90	13.02	12.86	15.95	13.13	12.87	16.02	-3.99	-5.26	-1.59	14.43	24
	6905	191	12.38	11.90	15.16	12.45	11.88	15.18	12.84	11.91	15.41	-3.99	-5.26	-1.59	13.82	24

Mode : EHT320 2x996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	13.45	13.25	16.36	13.39	13.26	16.34	13.45	13.20	16.33	-2.45	-4.02	-0.19	16.17	24
	6265	63	13.09	13.12	16.12	13.15	13.03	16.10	13.03	13.17	16.11	-2.45	-4.02	-0.19	15.93	24
UNII6	6425	95	12.99	12.98	16.00	12.99	12.95	15.98	12.98	12.94	15.97	-3.96	-5.08	-1.49	14.51	24
	6585	127	12.70	12.82	15.77	12.67	12.85	15.77	12.69	12.75	15.73	-3.96	-5.08	-1.49	14.28	24
UNII8	6745	159	13.25	13.04	16.16	13.28	13.10	16.20	13.17	12.98	16.08	-3.99	-5.26	-1.59	14.61	24
	6905	191	12.92	12.08	15.53	13.10	12.04	15.61	12.73	12.11	15.44	-3.99	-5.26	-1.59	14.02	24

Mode : EHT320 3x996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm]
UNII5	6105	31	13.41	13.20	16.32	13.39	13.32	16.37	13.37	13.24	16.32	-2.45	-4.02	-0.19	16.18	24
	6265	63	12.95	13.13	16.05	12.89	13.04	15.97	12.97	13.06	16.03	-2.45	-4.02	-0.19	15.86	24
UNII6	6425	95	12.87	12.90	15.90	12.87	12.87	15.88	12.89	12.91	15.91	-3.96	-5.08	-1.49	14.42	24
	6585	127	12.64	12.78	15.72	12.71	12.84	15.78	12.65	12.82	15.75	-3.96	-5.08	-1.49	14.29	24
UNII8	6745	159	13.09	12.99	16.05	13.10	12.98	16.05	13.15	13.02	16.09	-3.99	-5.26	-1.59	14.50	24
	6905	191	12.57	12.04	15.32	12.61	12.03	15.34	12.81	12.06	15.46	-3.99	-5.26	-1.59	13.87	24

10.3.2 E.I.R.P Output Power(Standard client)

Standard client Limit : 30 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.3.2.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-0.37	-1.69	2.03	-0.77	-2.18	1.59	-0.40	-1.74	1.99	-2.45	-4.02	-0.19	1.84	30
	6175	45	13.69	12.94	16.34	13.34	12.71	16.04	13.70	13.07	16.41	-2.45	-4.02	-0.19	16.22	30
	6415	93	12.43	12.98	15.72	12.12	12.69	15.43	12.53	13.13	15.85	-2.45	-4.02	-0.19	15.66	30
UNII7	6535	117	12.60	12.85	15.74	12.13	12.44	15.30	12.50	12.78	15.65	-3.96	-5.08	-1.49	14.25	30
	6695	149	13.33	13.15	16.25	12.98	12.77	15.89	13.32	13.10	16.22	-3.96	-5.08	-1.49	14.76	30
	6855	181	13.45	12.89	16.19	13.03	12.62	15.84	13.32	13.04	16.19	-3.96	-5.08	-1.49	14.70	30
Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	2.01	1.22	4.64	1.82	1.06	4.47	2.04	1.16	4.63	-2.45	-4.02	-0.19	4.45	30
	6175	45	13.28	13.07	16.19	13.29	12.89	16.10	13.27	13.08	16.19	-2.45	-4.02	-0.19	16.00	30
	6415	93	12.39	12.98	15.70	12.24	12.83	15.56	12.45	13.06	15.78	-2.45	-4.02	-0.19	15.59	30
UNII7	6535	117	12.55	12.75	15.66	12.31	12.55	15.44	12.48	12.70	15.60	-3.96	-5.08	-1.49	14.17	30
	6695	149	13.24	13.10	16.18	13.14	12.89	16.03	13.25	13.04	16.16	-3.96	-5.08	-1.49	14.69	30
	6855	181	13.27	12.87	16.08	13.16	12.70	15.95	13.28	13.00	16.15	-3.96	-5.08	-1.49	14.66	30
Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	4.42	3.04	6.79	-	-	-	4.44	3.06	6.81	-2.45	-4.02	-0.19	6.62	30
	6175	45	13.47	13.01	16.26	-	-	-	13.51	12.98	16.26	-2.45	-4.02	-0.19	16.07	30
	6415	93	12.27	12.95	15.63	-	-	-	12.30	12.99	15.67	-2.45	-4.02	-0.19	15.48	30
UNII7	6535	117	12.37	12.69	15.54	-	-	-	12.31	12.66	15.50	-3.96	-5.08	-1.49	14.05	30
	6695	149	13.18	13.04	16.12	-	-	-	13.15	13.02	16.10	-3.96	-5.08	-1.49	14.63	30
	6855	181	13.25	12.81	16.05	-	-	-	13.16	12.88	16.03	-3.96	-5.08	-1.49	14.56	30
Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	8.43	7.15	10.85	-	-	-	-2.45	-4.02	-0.19	10.66	30
	6175	45	-	-	-	15.52	14.95	18.25	-	-	-	-2.45	-4.02	-0.19	18.06	30
	6415	93	-	-	-	14.26	14.99	17.65	-	-	-	-2.45	-4.02	-0.19	17.46	30
UNII7	6535	117	-	-	-	14.31	14.69	17.52	-	-	-	-3.96	-5.08	-1.49	16.03	30
	6695	149	-	-	-	15.18	14.93	18.06	-	-	-	-3.96	-5.08	-1.49	16.57	30
	6855	181	-	-	-	15.11	14.77	17.95	-	-	-	-3.96	-5.08	-1.49	16.46	30

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5935	2	-	-	-	4.92	4.28	7.62	-	-	-	-2.45	-4.02	-0.19	7.43	30
	6175	45	-	-	-	12.89	12.66	15.78	-	-	-	-2.45	-4.02	-0.19	15.59	30
	6415	93	-	-	-	12.04	12.43	15.25	-	-	-	-2.45	-4.02	-0.19	15.06	30
UNII7	6535	117	-	-	-	12.07	12.41	15.25	-	-	-	-3.96	-5.08	-1.49	13.76	30
	6695	149	-	-	-	12.55	12.25	15.41	-	-	-	-3.96	-5.08	-1.49	13.92	30
	6855	181	-	-	-	12.63	12.73	15.69	-	-	-	-3.96	-5.08	-1.49	14.20	30

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	12.89	11.99	15.47	12.87	11.97	15.45	13.08	12.15	15.65	-2.45	-4.02	-0.19	15.46	30
	6165	43	13.30	12.85	16.09	13.21	12.87	16.06	13.44	12.99	16.23	-2.45	-4.02	-0.19	16.04	30
	6405	91	12.09	12.82	15.48	12.09	12.79	15.46	12.39	12.97	15.70	-2.45	-4.02	-0.19	15.51	30
UNII7	6565	123	12.17	12.58	15.39	12.05	12.50	15.29	12.14	12.62	15.40	-3.96	-5.08	-1.49	13.91	30
	6685	147	13.20	13.19	16.21	13.03	12.95	16.00	13.07	13.06	16.07	-3.96	-5.08	-1.49	14.72	30
	6845	179	13.14	12.86	16.01	12.88	12.71	15.80	12.90	12.95	15.93	-3.96	-5.08	-1.49	14.52	30

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	12.89	12.04	15.49	12.81	11.95	15.41	13.02	12.13	15.61	-2.45	-4.02	-0.19	15.42	30
	6165	43	13.22	12.86	16.05	13.15	12.85	16.01	13.34	13.00	16.18	-2.45	-4.02	-0.19	15.99	30
	6405	91	12.02	12.80	15.44	12.09	12.79	15.46	12.28	12.97	15.65	-2.45	-4.02	-0.19	15.46	30
UNII7	6565	123	12.15	12.59	15.39	12.06	12.41	15.25	12.09	12.62	15.37	-3.96	-5.08	-1.49	13.90	30
	6685	147	13.17	13.17	16.18	12.92	12.89	15.91	13.03	13.02	16.03	-3.96	-5.08	-1.49	14.69	30
	6845	179	13.12	12.86	16.00	12.84	12.70	15.78	12.88	12.94	15.92	-3.96	-5.08	-1.49	14.51	30

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	12.87	12.02	15.48	12.68	11.90	15.32	12.99	12.14	15.60	-2.45	-4.02	-0.19	15.41	30
	6165	43	13.21	12.89	16.06	13.34	12.76	16.07	13.46	13.04	16.27	-2.45	-4.02	-0.19	16.08	30
	6405	91	12.28	12.87	15.59	12.17	12.76	15.48	12.44	12.99	15.74	-2.45	-4.02	-0.19	15.55	30
UNII7	6565	123	12.37	12.64	15.52	12.16	12.48	15.33	12.30	12.66	15.49	-3.96	-5.08	-1.49	14.03	30
	6685	147	13.29	13.15	16.23	13.08	12.97	16.04	13.21	13.05	16.14	-3.96	-5.08	-1.49	14.74	30
	6845	179	13.25	12.83	16.05	13.00	12.75	15.89	13.05	12.94	16.00	-3.96	-5.08	-1.49	14.56	30

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	14.95	13.91	17.47	-	-	-	15.08	14.01	17.59	-2.45	-4.02	-0.19	17.40	30
	6165	43	15.38	14.71	18.07	-	-	-	15.44	14.86	18.17	-2.45	-4.02	-0.19	17.98	30
	6405	91	14.14	14.65	17.41	-	-	-	14.32	14.77	17.56	-2.45	-4.02	-0.19	17.37	30
UNII7	6565	123	14.15	14.48	17.32	-	-	-	14.13	14.49	17.33	-3.96	-5.08	-1.49	15.84	30
	6685	147	15.17	14.93	18.06	-	-	-	15.15	14.85	18.02	-3.96	-5.08	-1.49	16.57	30
	6845	179	15.16	14.72	17.95	-	-	-	14.99	14.72	17.87	-3.96	-5.08	-1.49	16.46	30

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-	-	-	14.00	13.05	16.56	-	-	-	-2.45	-4.02	-0.19	16.37	30
	6165	43	-	-	-	14.40	13.78	17.11	-	-	-	-2.45	-4.02	-0.19	16.92	30
	6405	91	-	-	-	13.22	13.70	16.48	-	-	-	-2.45	-4.02	-0.19	16.29	30
UNII7	6565	123	-	-	-	13.12	13.41	16.28	-	-	-	-3.96	-5.08	-1.49	14.79	30
	6685	147	-	-	-	14.19	13.87	17.05	-	-	-	-3.96	-5.08	-1.49	15.56	30
	6845	179	-	-	-	14.08	13.72	16.91	-	-	-	-3.96	-5.08	-1.49	15.42	30

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-	-	-	13.69	12.64	16.21	-	-	-	-2.45	-4.02	-0.19	16.02	30
	6165	43	-	-	-	14.10	13.40	16.78	-	-	-	-2.45	-4.02	-0.19	16.59	30
	6405	91	-	-	-	13.07	13.36	16.23	-	-	-	-2.45	-4.02	-0.19	16.04	30
UNII7	6565	123	-	-	-	13.04	13.16	16.11	-	-	-	-3.96	-5.08	-1.49	14.62	30
	6685	147	-	-	-	13.90	13.56	16.75	-	-	-	-3.96	-5.08	-1.49	15.26	30
	6845	179	-	-	-	13.83	13.36	16.61	-	-	-	-3.96	-5.08	-1.49	15.12	30

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	13.03	12.14	15.62	13.25	12.34	15.82	13.44	12.44	15.98	-2.45	-4.02	-0.19	15.79	30
	6145	39	13.27	12.77	16.04	13.16	12.70	15.94	13.20	12.81	16.02	-2.45	-4.02	-0.19	15.85	30
	6385	87	12.22	12.68	15.47	12.07	12.64	15.37	12.21	12.78	15.52	-2.45	-4.02	-0.19	15.33	30
UNII7	6625	135	12.40	12.50	15.46	12.61	12.55	15.59	12.72	12.81	15.78	-3.96	-5.08	-1.49	14.29	30
	6705	151	13.10	12.97	16.04	13.12	12.84	15.99	12.98	12.77	15.88	-3.96	-5.08	-1.49	14.55	30
	6785	167	13.13	12.89	16.02	12.80	12.75	15.78	12.77	12.77	15.78	-3.96	-5.08	-1.49	14.53	30

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	13.16	12.25	15.74	13.38	12.48	15.96	13.56	12.52	16.08	-2.45	-4.02	-0.19	15.89	30
	6145	39	13.34	12.90	16.13	13.24	12.78	16.03	13.32	12.93	16.14	-2.45	-4.02	-0.19	15.95	30
	6385	87	12.35	12.82	15.60	12.24	12.76	15.52	12.37	12.91	15.66	-2.45	-4.02	-0.19	15.47	30
UNII7	6625	135	12.65	12.68	15.68	12.75	12.68	15.73	12.92	12.96	15.95	-3.96	-5.08	-1.49	14.46	30
	6705	151	13.28	13.11	16.21	13.17	12.91	16.05	13.08	12.83	15.97	-3.96	-5.08	-1.49	14.72	30
	6785	167	13.17	12.92	16.06	12.91	12.79	15.86	12.86	12.85	15.86	-3.96	-5.08	-1.49	14.57	30

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	13.13	12.24	15.72	13.32	12.42	15.90	13.55	12.52	16.07	-2.45	-4.02	-0.19	15.88	30
	6145	39	13.35	12.84	16.11	13.30	12.75	16.04	13.34	12.92	16.15	-2.45	-4.02	-0.19	15.96	30
	6385	87	12.40	12.75	15.59	12.25	12.72	15.50	12.38	12.87	15.64	-2.45	-4.02	-0.19	15.45	30
UNII7	6625	135	12.62	12.65	15.65	12.80	12.67	15.74	12.93	12.88	15.91	-3.96	-5.08	-1.49	14.42	30
	6705	151	13.30	13.07	16.20	13.21	12.87	16.06	13.08	12.58	15.85	-3.96	-5.08	-1.49	14.71	30
	6785	167	13.18	12.57	15.90	12.92	12.35	15.66	12.88	12.36	15.64	-3.96	-5.08	-1.49	14.41	30

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	15.20	14.55	17.90	15.31	14.56	17.96	15.62	14.74	18.21	-2.45	-4.02	-0.19	18.02	30
	6145	39	15.39	14.97	18.20	15.31	14.82	18.08	15.39	14.94	18.18	-2.45	-4.02	-0.19	18.01	30
	6385	87	14.30	14.62	17.48	14.20	14.58	17.40	14.36	14.70	17.54	-2.45	-4.02	-0.19	17.35	30
UNII7	6625	135	14.71	14.42	17.58	14.70	14.48	17.60	14.89	14.62	17.76	-3.96	-5.08	-1.49	16.27	30
	6705	151	15.21	14.74	17.99	15.13	14.65	17.91	15.06	14.45	17.78	-3.96	-5.08	-1.49	16.50	30
	6785	167	14.99	14.52	17.77	14.83	14.40	17.63	14.74	14.29	17.53	-3.96	-5.08	-1.49	16.28	30

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	14.07	13.58	16.84	-	-	-	14.37	13.76	17.09	-2.45	-4.02	-0.19	16.90	30
	6145	39	14.07	13.84	16.97	-	-	-	14.16	13.89	17.04	-2.45	-4.02	-0.19	16.85	30
	6385	87	13.01	13.57	16.31	-	-	-	13.07	13.67	16.39	-2.45	-4.02	-0.19	16.20	30
UNII7	6625	135	13.45	13.41	16.44				13.63	13.53	16.59	-3.96	-5.08	-1.49	15.10	30
	6705	151	14.03	13.65	16.85	-	-	-	13.96	13.47	16.73	-3.96	-5.08	-1.49	15.36	30
	6785	167	13.72	13.39	16.57				13.63	13.27	16.46	-3.96	-5.08	-1.49	15.08	30

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-	-	-	14.13	13.54	16.86	-	-	-	-2.45	-4.02	-0.19	16.67	30
	6145	39	-	-	-	14.01	13.70	16.87	-	-	-	-2.45	-4.02	-0.19	16.68	30
	6385	87	-	-	-	12.98	13.49	16.25	-	-	-	-2.45	-4.02	-0.19	16.06	30
UNII7	6625	135				13.44	13.35	16.40				-3.96	-5.08	-1.49	14.91	30
	6705	151	-	-	-	13.87	13.45	16.68	-	-	-	-3.96	-5.08	-1.49	15.19	30
	6785	167				13.65	13.28	16.48				-3.96	-5.08	-1.49	14.99	30

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-	-	-	13.89	13.29	16.61	-	-	-	-2.45	-4.02	-0.19	16.42	30
	6145	39	-	-	-	13.78	13.49	16.65	-	-	-	-2.45	-4.02	-0.19	16.46	30
	6385	87	-	-	-	12.66	13.25	15.97	-	-	-	-2.45	-4.02	-0.19	15.78	30
UNII7	6625	135				13.19	13.15	16.18				-3.96	-5.08	-1.49	14.69	30
	6705	151	-	-	-	13.66	13.18	16.44	-	-	-	-3.96	-5.08	-1.49	14.95	30
	6785	167				13.33	12.96	16.16				-3.96	-5.08	-1.49	14.67	30

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.38	13.10	15.76	12.76	13.40	16.10	12.91	13.51	16.23	-2.45	-4.02	-0.19	16.04	30
	6185	47	12.94	12.45	15.71	13.12	12.59	15.87	13.35	12.79	16.09	-2.45	-4.02	-0.19	15.90	30
	6345	79	12.12	12.39	15.27	12.08	12.50	15.30	12.06	12.45	15.27	-2.45	-4.02	-0.19	15.11	30
UNII7	6665	143	12.36	12.14	15.26	12.70	12.33	15.53	12.81	12.87	15.85	-3.96	-5.08	-1.49	14.36	30

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	12.36	13.10	15.76	12.76	13.44	16.12	12.92	13.57	16.27	-2.45	-4.02	-0.19	16.08	30
	6185	47	12.92	12.65	15.79	13.07	12.68	15.89	13.25	12.83	16.05	-2.45	-4.02	-0.19	15.86	30
	6345	79	12.14	12.52	15.35	12.29	12.81	15.57	12.19	12.84	15.54	-2.45	-4.02	-0.19	15.38	30
UNII7	6665	143	12.58	12.64	15.62	12.87	12.77	15.83	13.06	13.04	16.06	-3.96	-5.08	-1.49	14.57	30

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	12.65	13.45	16.08	12.97	13.71	16.37	13.15	13.86	16.53	-2.45	-4.02	-0.19	16.34	30
	6185	47	13.31	12.99	16.16	13.38	12.99	16.20	13.51	13.11	16.33	-2.45	-4.02	-0.19	16.14	30
	6345	79	12.54	12.84	15.70	12.41	12.92	15.68	12.37	12.95	15.68	-2.45	-4.02	-0.19	15.51	30
UNII7	6665	143	12.74	12.77	15.77	13.00	12.86	15.94	13.15	13.15	16.16	-3.96	-5.08	-1.49	14.67	30

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	14.80	15.31	18.07	14.90	15.39	18.16	15.21	15.63	18.44	-2.45	-4.02	-0.19	18.25	30
	6185	47	15.40	14.91	18.17	15.31	14.81	18.08	15.53	15.03	18.29	-2.45	-4.02	-0.19	18.10	30
	6345	79	14.45	14.73	17.60	14.39	14.71	17.56	14.32	14.87	17.62	-2.45	-4.02	-0.19	17.43	30
UNII7	6665	143	14.74	14.69	17.72	14.92	14.71	17.82	15.15	14.98	18.08	-3.96	-5.08	-1.49	16.59	30

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	13.76	14.46	17.14	-	-	-	14.11	14.72	17.44	-2.45	-4.02	-0.19	17.25	30
	6185	47	14.38	13.86	17.14	-	-	-	14.46	13.98	17.24	-2.45	-4.02	-0.19	17.05	30
	6345	79	13.41	13.77	16.60	-	-	-	13.34	13.91	16.65	-2.45	-4.02	-0.19	16.46	30
UNII7	6665	143	13.86	13.78	16.83	-	-	-	14.05	13.92	17.00	-3.96	-5.08	-1.49	15.51	30

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	13.90	14.53	17.24	-	-	-	-2.45	-4.02	-0.19	17.05	30
	6185	47	-	-	-	14.41	13.88	17.17	-	-	-	-2.45	-4.02	-0.19	16.98	30
	6345	79	-	-	-	13.39	13.81	16.62	-	-	-	-2.45	-4.02	-0.19	16.43	30
UNII7	6665	143	-	-	-	13.95	13.81	16.89	-	-	-	-3.96	-5.08	-1.49	15.40	30

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.21	13.79	16.52	13.27	13.61	16.45	12.93	13.36	16.16	-2.45	-4.02	-0.19	16.33	30
	6185	47	13.58	13.14	16.38	13.65	13.37	16.52	13.37	13.13	16.26	-2.45	-4.02	-0.19	16.33	30
	6345	79	12.31	12.86	15.60	12.21	12.79	15.52	12.25	12.86	15.58	-2.45	-4.02	-0.19	15.41	30
UNII7	6665	143	13.19	13.01	16.11	13.07	12.86	15.98	12.79	12.62	15.72	-3.96	-5.08	-1.49	14.62	30

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	13.14	13.80	16.49	13.20	13.64	16.44	12.91	13.33	16.13	-2.45	-4.02	-0.19	16.30	30
	6185	47	13.49	13.14	16.33	13.58	13.38	16.49	13.34	13.18	16.27	-2.45	-4.02	-0.19	16.30	30
	6345	79	12.16	12.84	15.52	12.07	12.76	15.44	12.19	12.84	15.54	-2.45	-4.02	-0.19	15.35	30
UNII7	6665	143	13.07	12.99	16.04	13.04	12.83	15.95	12.78	12.61	15.71	-3.96	-5.08	-1.49	14.55	30

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	13.30	13.86	16.60	13.27	13.66	16.48	13.07	13.46	16.28	-2.45	-4.02	-0.19	16.41	30
	6185	47	13.62	13.25	16.45	13.68	13.45	16.58	13.51	13.29	16.41	-2.45	-4.02	-0.19	16.39	30
	6345	79	12.26	12.87	15.58	12.19	12.87	15.56	12.30	12.97	15.66	-2.45	-4.02	-0.19	15.47	30
UNII7	6665	143	13.20	13.08	16.15	13.13	12.92	16.04	12.93	12.78	15.86	-3.96	-5.08	-1.49	14.66	30

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	15.27	15.59	18.45	15.23	15.48	18.37	15.13	15.39	18.27	-2.45	-4.02	-0.19	18.26	30
	6185	47	15.59	15.14	18.38	15.63	15.28	18.47	15.55	15.32	18.44	-2.45	-4.02	-0.19	18.28	30
	6345	79	14.00	14.69	17.37	14.02	14.66	17.36	14.16	14.85	17.53	-2.45	-4.02	-0.19	17.34	30
UNII7	6665	143	15.00	14.92	17.97	14.97	14.81	17.90	14.89	14.65	17.78	-3.96	-5.08	-1.49	16.48	30

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	14.18	14.65	17.43	-	-	-	14.13	14.49	17.32	-2.45	-4.02	-0.19	17.24	30
	6185	47	14.57	14.18	17.39	-	-	-	14.57	14.35	17.47	-2.45	-4.02	-0.19	17.28	30
	6345	79	13.00	13.72	16.38	-	-	-	13.06	13.83	16.48	-2.45	-4.02	-0.19	16.29	30
UNII7	6665	143	13.99	13.90	16.96	-	-	-	13.91	13.76	16.85	-3.96	-5.08	-1.49	15.47	30

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	14.10	14.51	17.32	-	-	-	-2.45	-4.02	-0.19	17.13	30
	6185	47	-	-	-	14.50	14.22	17.37	-	-	-	-2.45	-4.02	-0.19	17.18	30
	6345	79	-	-	-	13.00	13.74	16.39	-	-	-	-2.45	-4.02	-0.19	16.20	30
UNII7	6665	143	-	-	-	13.92	13.77	16.86	-	-	-	-3.96	-5.08	-1.49	15.37	30

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	12.30	12.95	15.65	-	-	-	-2.45	-4.02	-0.19	15.46	30
	6185	47	-	-	-	12.83	12.49	15.67	-	-	-	-2.45	-4.02	-0.19	15.48	30
	6345	79	-	-	-	11.63	12.23	14.95	-	-	-	-2.45	-4.02	-0.19	14.76	30
UNII7	6665	143	-	-	-	12.31	12.28	15.31	-	-	-	-3.96	-5.08	-1.49	13.82	30

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	12.95	13.62	16.31	-	-	-	-2.45	-4.02	-0.19	16.12	30
	6185	47	-	-	-	13.38	13.08	16.24	-	-	-	-2.45	-4.02	-0.19	16.05	30
	6345	79	-	-	-	12.21	12.80	15.52	-	-	-	-2.45	-4.02	-0.19	15.33	30
UNII7	6665	143	-	-	-	12.90	12.84	15.88	-	-	-	-3.96	-5.08	-1.49	14.39	30

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 26T	6105	31	12.56	12.82	15.70	12.91	13.13	16.03	13.20	13.40	16.31	-2.45	-4.02	-0.19	16.12	30
	6265	63	12.48	12.55	15.53	12.52	12.58	15.56	12.88	12.92	15.91	-2.45	-4.02	-0.19	15.72	30
UNII5 52T	6105	31	12.55	12.88	15.73	12.86	13.16	16.03	13.16	13.33	16.26	-2.45	-4.02	-0.19	16.07	30
	6265	63	12.47	12.59	15.54	12.53	12.58	15.56	12.80	12.82	15.82	-2.45	-4.02	-0.19	15.63	30
UNII5 106T	6105	31	12.62	12.95	15.80	12.89	13.19	16.05	13.12	13.34	16.24	-2.45	-4.02	-0.19	16.05	30
	6265	63	12.47	12.63	15.56	12.57	12.61	15.60	12.76	12.88	15.83	-2.45	-4.02	-0.19	15.64	30
UNII5 242T	6105	31	14.82	15.04	17.94	14.95	15.14	18.06	15.18	15.32	18.26	-2.45	-4.02	-0.19	18.07	30
	6265	63	14.75	14.70	17.73	14.67	14.58	17.64	14.90	14.83	17.88	-2.45	-4.02	-0.19	17.69	30
UNII5 484T	6105	31	13.80	14.04	16.93	-	-	-	14.09	14.25	17.18	-2.45	-4.02	-0.19	16.99	30
	6265	63	13.47	13.64	16.57	-	-	-	13.64	13.79	16.72	-2.45	-4.02	-0.19	16.53	30
UNII5 996T	6105	31	-	-	-	13.92	14.14	17.04	-	-	-	-2.45	-4.02	-0.19	16.85	30
	6265	63	-	-	-	13.52	13.69	16.61	-	-	-	-2.45	-4.02	-0.19	16.42	30

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 26T	6105	31	12.98	13.16	16.08	13.01	13.02	16.02	13.07	13.08	16.09	-2.45	-4.02	-0.19	15.90	30
	6265	63	12.67	12.77	15.73	12.78	12.99	15.90	12.90	13.17	16.05	-2.45	-4.02	-0.19	15.86	30
UNII5 52T	6105	31	13.05	13.17	16.12	13.04	13.02	16.04	13.10	13.03	16.07	-2.45	-4.02	-0.19	15.93	30
	6265	63	12.69	12.82	15.77	12.78	13.02	15.91	12.90	13.12	16.02	-2.45	-4.02	-0.19	15.83	30
UNII5 106T	6105	31	13.08	13.22	16.16	13.04	13.01	16.03	13.15	13.13	16.15	-2.45	-4.02	-0.19	15.97	30
	6265	63	12.80	12.91	15.87	12.88	13.06	15.98	12.91	13.22	16.08	-2.45	-4.02	-0.19	15.89	30
UNII5 242T	6105	31	15.32	15.36	18.35	15.28	15.23	18.27	15.14	15.09	18.13	-2.45	-4.02	-0.19	18.16	30
	6265	63	15.08	15.04	18.07	15.10	15.13	18.13	14.99	15.17	18.09	-2.45	-4.02	-0.19	17.94	30
UNII5 484T	6105	31	14.21	14.27	17.25	-	-	-	14.15	14.07	17.12	-2.45	-4.02	-0.19	17.06	30
	6265	63	13.95	14.06	17.02	-	-	-	13.87	14.19	17.05	-2.45	-4.02	-0.19	16.86	30
UNII5 996T	6105	31	-	-	-	14.11	14.13	17.13	-	-	-	-2.45	-4.02	-0.19	16.94	30
	6265	63	-	-	-	13.89	14.08	17.00	-	-	-	-2.45	-4.02	-0.19	16.81	30

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 26T	6105	31	13.13	13.24	16.20	13.09	13.13	16.12	12.95	12.90	15.94	-2.45	-4.02	-0.19	16.01	30
	6265	63	12.87	13.28	16.09	12.67	13.19	15.95	12.11	12.84	15.50	-2.45	-4.02	-0.19	15.90	30
UNII5 52T	6105	31	13.15	13.19	16.18	13.10	13.12	16.12	12.89	12.90	15.91	-2.45	-4.02	-0.19	15.99	30
	6265	63	12.89	13.22	16.07	12.69	13.16	15.94	12.19	12.80	15.52	-2.45	-4.02	-0.19	15.88	30
UNII5 106T	6105	31	13.08	13.12	16.11	13.11	13.05	16.09	12.96	12.95	15.97	-2.45	-4.02	-0.19	15.92	30
	6265	63	12.81	13.18	16.01	12.63	13.12	15.89	12.29	12.89	15.61	-2.45	-4.02	-0.19	15.82	30
UNII5 242T	6105	31	15.06	14.99	18.03	14.97	14.90	17.95	15.15	15.09	18.13	-2.45	-4.02	-0.19	17.94	30
	6265	63	14.88	15.05	17.98	14.73	15.00	17.88	14.59	15.10	17.86	-2.45	-4.02	-0.19	17.79	30
UNII5 484T	6105	31	14.00	13.95	16.98	-	-	-	14.09	14.01	17.06	-2.45	-4.02	-0.19	16.87	30
	6265	63	13.70	14.05	16.89	-	-	-	13.51	14.09	16.82	-2.45	-4.02	-0.19	16.70	30
UNII5 996T	6105	31	-	-	-	14.00	13.94	16.98	-	-	-	-2.45	-4.02	-0.19	16.79	30
	6265	63	-	-	-	13.59	14.06	16.84	-	-	-	-2.45	-4.02	-0.19	16.65	30

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 26T	6105	31	13.17	13.24	16.22	13.25	13.43	16.35	12.97	13.18	16.09	-2.45	-4.02	-0.19	16.16	30
	6265	63	12.33	13.07	15.72	12.18	12.98	15.61	12.31	13.12	15.74	-2.45	-4.02	-0.19	15.55	30
UNII5 52T	6105	31	13.09	13.28	16.19	13.14	13.48	16.32	12.89	13.22	16.07	-2.45	-4.02	-0.19	16.13	30
	6265	63	12.18	13.11	15.68	12.09	12.98	15.57	12.24	13.08	15.69	-2.45	-4.02	-0.19	15.50	30
UNII5 106T	6105	31	13.04	13.19	16.13	13.12	13.40	16.27	12.89	13.24	16.08	-2.45	-4.02	-0.19	16.08	30
	6265	63	12.10	13.01	15.59	12.01	12.97	15.53	12.23	13.10	15.70	-2.45	-4.02	-0.19	15.51	30
UNII5 242T	6105	31	15.14	15.23	18.19	15.17	15.35	18.27	15.01	15.35	18.19	-2.45	-4.02	-0.19	18.08	30
	6265	63	14.16	14.98	17.60	14.12	14.92	17.55	14.38	15.14	17.79	-2.45	-4.02	-0.19	17.60	30
UNII5 484T	6105	31	14.12	14.26	17.20	-	-	-	14.03	14.37	17.22	-2.45	-4.02	-0.19	17.03	30
	6265	63	13.03	13.97	16.54	-	-	-	13.13	14.05	16.63	-2.45	-4.02	-0.19	16.44	30
UNII5 996T	6105	31	-	-	-	14.05	14.31	17.19	-	-	-	-2.45	-4.02	-0.19	17.00	30
	6265	63	-	-	-	13.04	14.00	16.56	-	-	-	-2.45	-4.02	-0.19	16.37	30

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	-	-	-	12.93	13.22	16.08	-	-	-	-2.45	-4.02	-0.19	15.89	30
	6265	63	-	-	-	12.68	12.97	15.83	-	-	-	-2.45	-4.02	-0.19	15.64	30
UNII5 160U	6105	31	-	-	-	12.90	13.13	16.03	-	-	-	-2.45	-4.02	-0.19	15.84	30
	6265	63	-	-	-	12.27	13.02	15.67	-	-	-	-2.45	-4.02	-0.19	15.48	30

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 4x996T	6105	31	-	-	-	13.02	13.37	16.21	-	-	-	-2.45	-4.02	-0.19	16.02	30
	6265	63	-	-	-	12.54	13.26	15.92	-	-	-	-2.45	-4.02	-0.19	15.73	30
UNII5 SU	6105	31	-	-	-	13.32	13.59	16.47	-	-	-	-2.45	-4.02	-0.19	16.28	30
	6265	63	-	-	-	12.87	13.43	16.17	-	-	-	-2.45	-4.02	-0.19	15.98	30

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	7.19	6.34	9.80	-	-	-	-2.45	-4.02	-0.19	9.61	30
	6175	45	-	-	-	15.38	14.77	18.09	-	-	-	-2.45	-4.02	-0.19	17.90	30
	6415	93	-	-	-	14.09	14.54	17.33	-	-	-	-2.45	-4.02	-0.19	17.14	30
UNII7	6535	117	-	-	-	14.29	14.36	17.33	-	-	-	-3.96	-5.08	-1.49	15.84	30
	6695	149	-	-	-	15.08	14.55	17.83	-	-	-	-3.96	-5.08	-1.49	16.34	30
	6855	181	-	-	-	15.11	14.46	17.81	-	-	-	-3.96	-5.08	-1.49	16.32	30

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	2.01	0.88	4.49	1.89	0.74	4.36	1.98	0.89	4.48	-2.45	-4.02	-0.19	4.30	30
	6175	45	13.84	13.41	16.64	13.75	13.29	16.54	13.89	13.41	16.66	-2.45	-4.02	-0.19	16.47	30
	6415	93	12.67	13.29	16.00	12.56	13.19	15.89	12.66	13.30	16.00	-2.45	-4.02	-0.19	15.81	30
UNII7	6535	117	12.68	13.04	15.87	12.63	13.00	15.83	12.73	13.13	15.95	-3.96	-5.08	-1.49	14.46	30
	6695	149	13.53	13.39	16.48	13.46	13.25	16.36	13.55	13.36	16.46	-3.96	-5.08	-1.49	14.99	30
	6855	181	13.67	13.13	16.42	13.53	13.04	16.30	13.59	13.17	16.39	-3.96	-5.08	-1.49	14.93	30

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	4.43	3.73	7.11	-	-	-	4.45	3.69	7.10	-2.45	-4.02	-0.19	6.92	30
	6165	43	13.81	13.43	16.64	-	-	-	13.83	13.43	16.65	-2.45	-4.02	-0.19	16.46	30
	6405	91	12.53	13.29	15.94	-	-	-	12.56	13.32	15.97	-2.45	-4.02	-0.19	15.78	30
UNII7	6565	123	12.58	13.01	15.81	-	-	-	12.60	13.03	15.83	-3.96	-5.08	-1.49	14.34	30
	6685	147	13.50	13.33	16.43	-	-	-	13.48	13.31	16.40	-3.96	-5.08	-1.49	14.94	30
	6845	179	13.62	13.08	16.37	-	-	-	13.53	13.15	16.35	-3.96	-5.08	-1.49	14.88	30

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	13.44	12.72	16.10	13.32	12.55	15.96	13.56	12.75	16.18	-2.45	-4.02	-0.19	15.99	30
	6165	43	13.79	13.40	16.61	13.69	13.26	16.49	13.89	13.49	16.70	-2.45	-4.02	-0.19	16.51	30
	6405	91	12.65	13.27	15.98	12.58	13.13	15.87	12.81	13.33	16.09	-2.45	-4.02	-0.19	15.90	30
UNII7	6565	123	12.62	13.02	15.84	12.49	12.90	15.71	12.68	13.03	15.87	-3.96	-5.08	-1.49	14.38	30
	6685	147	13.67	13.49	16.59	13.46	13.29	16.39	13.58	13.35	16.48	-3.96	-5.08	-1.49	15.10	30
	6845	179	13.70	13.18	16.46	13.49	13.10	16.31	13.47	13.20	16.35	-3.96	-5.08	-1.49	14.97	30

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	13.38	12.66	16.04	13.32	12.55	15.96	13.50	12.72	16.14	-2.45	-4.02	-0.19	15.95	30
	6165	43	13.71	13.35	16.54	13.67	13.24	16.47	13.84	13.48	16.68	-2.45	-4.02	-0.19	16.49	30
	6405	91	12.58	13.17	15.90	12.54	13.09	15.83	12.75	13.28	16.03	-2.45	-4.02	-0.19	15.84	30
UNII7	6565	123	12.59	12.95	15.78	12.49	12.87	15.69	12.63	12.98	15.82	-3.96	-5.08	-1.49	14.33	30
	6685	147	13.63	13.47	16.56	13.45	13.31	16.39	13.54	13.34	16.45	-3.96	-5.08	-1.49	15.07	30
	6845	179	13.62	13.11	16.38	13.46	13.04	16.27	13.43	13.16	16.30	-3.96	-5.08	-1.49	14.89	30

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	13.46	12.91	16.21	13.54	12.96	16.27	13.81	13.07	16.47	-2.45	-4.02	-0.19	16.28	30
	6145	39	13.60	13.36	16.49	13.48	13.18	16.34	13.63	13.38	16.52	-2.45	-4.02	-0.19	16.33	30
	6385	87	12.64	13.18	15.93	12.50	13.09	15.82	12.66	13.22	15.96	-2.45	-4.02	-0.19	15.77	30
UNII7	6625	135	12.91	13.07	16.00	12.99	13.06	16.04	13.19	13.24	16.22	-3.96	-5.08	-1.49	14.73	30
	6705	151	13.52	13.41	16.47	13.43	13.27	16.36	13.31	13.18	16.26	-3.96	-5.08	-1.49	14.98	30
	6785	167	13.38	13.33	16.37	13.20	13.20	16.21	13.23	13.17	16.21	-3.96	-5.08	-1.49	14.88	30

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	13.46	12.89	16.19	13.52	12.95	16.25	13.77	13.02	16.42	-2.45	-4.02	-0.19	16.23	30
	6145	39	13.56	13.31	16.45	13.42	13.12	16.28	13.58	13.33	16.46	-2.45	-4.02	-0.19	16.27	30
	6385	87	12.59	13.13	15.88	12.51	13.06	15.80	12.66	13.19	15.95	-2.45	-4.02	-0.19	15.76	30
UNII7	6625	135	12.92	13.01	15.98	12.98	13.00	16.00	13.16	13.20	16.19	-3.96	-5.08	-1.49	14.70	30
	6705	151	13.52	13.37	16.46	13.39	13.19	16.30	13.30	13.14	16.23	-3.96	-5.08	-1.49	14.97	30
	6785	167	13.35	13.25	16.31	13.13	13.16	16.15	13.16	13.11	16.15	-3.96	-5.08	-1.49	14.82	30

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	14.70	14.01	17.38	14.66	13.99	17.35	14.58	13.91	17.27	-2.45	-4.02	-0.19	17.19	30
	6145	39	14.59	14.27	17.44	14.60	14.26	17.44	14.51	14.20	17.37	-2.45	-4.02	-0.19	17.25	30
	6385	87	13.53	14.13	16.85	13.53	14.10	16.83	13.58	14.12	16.87	-2.45	-4.02	-0.19	16.68	30
UNII7	6625	135	14.13	14.13	17.14	14.08	14.13	17.12	14.04	14.03	17.05	-3.96	-5.08	-1.49	15.65	30
	6705	151	14.56	14.20	17.40	14.51	14.19	17.36	14.55	14.21	17.39	-3.96	-5.08	-1.49	15.91	30
	6785	167	14.28	14.15	17.22	14.27	14.12	17.21	14.28	14.16	17.23	-3.96	-5.08	-1.49	15.74	30

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.96	13.59	16.30	13.10	13.75	16.45	13.36	13.82	16.61	-2.45	-4.02	-0.19	16.42	30
	6185	47	13.49	12.94	16.24	13.53	12.85	16.21	13.69	13.21	16.46	-2.45	-4.02	-0.19	16.27	30
	6345	79	12.69	12.88	15.80	12.64	12.90	15.78	12.55	12.99	15.79	-2.45	-4.02	-0.19	15.61	30
UNII7	6665	143	12.94	12.86	15.91	13.17	12.96	16.07	13.38	13.16	16.28	-3.96	-5.08	-1.49	14.79	30

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	12.98	13.65	16.34	13.18	13.82	16.52	13.41	13.86	16.65	-2.45	-4.02	-0.19	16.46	30
	6185	47	13.53	12.98	16.27	13.57	12.90	16.26	13.80	13.22	16.53	-2.45	-4.02	-0.19	16.34	30
	6345	79	12.70	12.92	15.82	12.71	12.97	15.85	12.64	12.99	15.83	-2.45	-4.02	-0.19	15.66	30
UNII7	6665	143	13.01	12.88	15.95	13.24	13.00	16.14	13.42	13.21	16.33	-3.96	-5.08	-1.49	14.84	30

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	14.34	14.79	17.58	14.26	14.72	17.51	14.17	14.67	17.44	-2.45	-4.02	-0.19	17.39	30
	6185	47	14.73	14.14	17.45	14.73	14.05	17.41	14.59	13.94	17.29	-2.45	-4.02	-0.19	17.26	30
	6345	79	13.61	14.00	16.82	13.60	13.96	16.79	13.61	13.90	16.77	-2.45	-4.02	-0.19	16.63	30
UNII7	6665	143	14.31	14.08	17.20	14.27	14.03	17.16	14.19	13.95	17.08	-3.96	-5.08	-1.49	15.71	30

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.44	13.88	16.68	13.38	13.68	16.54	13.26	13.58	16.43	-2.45	-4.02	-0.19	16.49	30
	6185	47	13.83	13.35	16.61	13.86	13.38	16.64	13.67	13.36	16.52	-2.45	-4.02	-0.19	16.45	30
	6345	79	12.51	12.97	15.76	12.39	12.88	15.65	12.58	13.07	15.84	-2.45	-4.02	-0.19	15.65	30
UNII7	6665	143	13.40	13.13	16.27	13.28	13.00	16.15	13.12	12.86	16.00	-3.96	-5.08	-1.49	14.78	30

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	13.51	13.94	16.74	13.40	13.79	16.61	13.33	13.59	16.47	-2.45	-4.02	-0.19	16.55	30
	6185	47	13.87	13.37	16.64	13.90	13.40	16.67	13.71	13.42	16.58	-2.45	-4.02	-0.19	16.48	30
	6345	79	12.52	13.00	15.78	12.41	12.95	15.70	12.60	13.10	15.87	-2.45	-4.02	-0.19	15.68	30
UNII7	6665	143	13.44	13.14	16.31	13.33	13.04	16.20	13.20	12.91	16.06	-3.96	-5.08	-1.49	14.82	30

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	14.47	14.74	17.62	14.44	14.74	17.60	14.42	14.75	17.60	-2.45	-4.02	-0.19	17.43	30
	6185	47	14.91	14.47	17.70	14.85	14.43	17.65	14.84	14.35	17.61	-2.45	-4.02	-0.19	17.51	30
	6345	79	13.49	13.99	16.76	13.43	13.98	16.72	13.36	13.88	16.64	-2.45	-4.02	-0.19	16.57	30
UNII7	6665	143	14.30	13.98	17.15	14.32	13.96	17.15	14.33	13.96	17.16	-3.96	-5.08	-1.49	15.67	30

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	14.43	14.76	17.61	14.37	14.70	17.55	14.32	14.77	17.56	-2.45	-4.02	-0.19	17.42	30
	6185	47	14.85	14.36	17.62	14.79	14.26	17.55	14.76	14.16	17.48	-2.45	-4.02	-0.19	17.43	30
	6345	79	13.51	13.98	16.76	13.50	13.94	16.74	13.55	13.93	16.76	-2.45	-4.02	-0.19	16.57	30
UNII7	6665	143	14.33	14.03	17.19	14.27	13.97	17.13	14.31	14.03	17.18	-3.96	-5.08	-1.49	15.70	30

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	14.21	14.90	17.58	14.08	14.87	17.50	14.02	14.89	17.49	-2.45	-4.02	-0.19	17.39	30
	6185	47	14.50	14.87	17.70	14.44	14.85	17.66	14.42	14.80	17.62	-2.45	-4.02	-0.19	17.51	30
	6345	79	13.15	14.59	16.94	13.16	14.56	16.93	13.15	14.57	16.93	-2.45	-4.02	-0.19	16.75	30
UNII7	6665	143	13.94	14.66	17.33	13.89	14.62	17.28	13.94	14.64	17.32	-3.96	-5.08	-1.49	15.84	30

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	13.05	13.22	16.15	13.21	13.31	16.27	13.47	13.48	16.48	-2.45	-4.02	-0.19	16.29	30
52T+26T	6265	63	12.80	12.77	15.80	12.86	12.66	15.77	13.06	13.07	16.08	-2.45	-4.02	-0.19	15.89	30
UNII5	6105	31	13.09	13.29	16.20	13.28	13.46	16.38	13.51	13.52	16.53	-2.45	-4.02	-0.19	16.34	30
106T+26T	6265	63	12.89	12.83	15.87	12.89	12.75	15.83	13.16	13.15	16.17	-2.45	-4.02	-0.19	15.98	30
UNII5	6105	31	14.33	14.38	17.36	14.29	14.36	17.33	14.21	14.31	17.27	-2.45	-4.02	-0.19	17.17	30
484T+242T	6265	63	13.91	13.86	16.90	13.94	13.91	16.94	13.89	13.78	16.85	-2.45	-4.02	-0.19	16.75	30

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 52T+26T	6105	31	13.35	13.36	16.37	13.43	13.33	16.39	13.29	13.15	16.23	-2.45	-4.02	-0.19	16.20	30
	6265	63	13.01	13.04	16.04	13.21	13.30	16.27	13.05	13.29	16.19	-2.45	-4.02	-0.19	16.08	30
UNII5 106T+26T	6105	31	13.44	13.46	16.46	13.53	13.42	16.48	13.39	13.27	16.34	-2.45	-4.02	-0.19	16.29	30
	6265	63	13.14	13.14	16.15	13.31	13.36	16.35	13.17	13.39	16.29	-2.45	-4.02	-0.19	16.16	30
UNII5 484T+242T	6105	31	14.34	14.20	17.28	14.34	14.22	17.29	14.38	14.28	17.34	-2.45	-4.02	-0.19	17.15	30
	6265	63	14.10	14.24	17.18	14.08	14.22	17.16	14.11	14.21	17.17	-2.45	-4.02	-0.19	16.99	30

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	13.26	13.21	16.24	12.99	12.79	15.90	13.24	13.16	16.21	-2.45	-4.02	-0.19	16.05	30
52T+26T	6265	63	12.97	13.26	16.13	12.68	13.02	15.86	12.55	13.06	15.82	-2.45	-4.02	-0.19	15.94	30
UNII5	6105	31	13.38	13.28	16.34	13.13	12.94	16.04	13.36	13.27	16.33	-2.45	-4.02	-0.19	16.15	30
106T+26T	6265	63	13.09	13.37	16.24	12.79	13.08	15.95	12.65	13.17	15.93	-2.45	-4.02	-0.19	16.05	30
UNII5	6105	31	14.28	14.12	17.21	14.25	14.11	17.19	14.21	14.01	17.12	-2.45	-4.02	-0.19	17.02	30
484T+242T	6265	63	13.78	14.19	17.00	13.79	14.20	17.01	13.79	14.17	16.99	-2.45	-4.02	-0.19	16.82	30

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	13.39	13.38	16.40	13.37	13.34	16.37	13.23	13.39	16.32	-2.45	-4.02	-0.19	16.21	30
52T+26T	6265	63	12.57	13.08	15.85	12.44	13.00	15.74	12.68	13.27	15.99	-2.45	-4.02	-0.19	15.80	30
UNII5	6105	31	13.50	13.48	16.50	13.50	13.48	16.50	13.31	13.49	16.41	-2.45	-4.02	-0.19	16.31	30
106T+26T	6265	63	12.66	13.24	15.97	12.52	13.12	15.84	12.79	13.39	16.11	-2.45	-4.02	-0.19	15.92	30
UNII5	6105	31	14.42	14.45	17.45	14.39	14.41	17.41	14.42	14.39	17.42	-2.45	-4.02	-0.19	17.26	30
484T+242T	6265	63	13.56	14.18	16.89	13.57	14.16	16.89	13.47	14.09	16.81	-2.45	-4.02	-0.19	16.70	30

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	14.38	14.29	17.34	14.32	14.28	17.31	14.31	14.37	17.35	-2.45	-4.02	-0.19	17.16	30
160L	6265	63	14.07	14.15	17.12	14.02	14.08	17.06	14.02	13.97	17.00	-2.45	-4.02	-0.19	16.93	30
UNII5	6105	31	14.36	14.33	17.35	14.31	14.20	17.27	14.30	14.14	17.23	-2.45	-4.02	-0.19	17.16	30
160U	6265	63	13.58	14.14	16.88	13.65	14.12	16.90	13.68	14.15	16.93	-2.45	-4.02	-0.19	16.74	30

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	13.28	13.21	16.25	13.29	13.26	16.28	13.26	13.22	16.25	-2.45	-4.02	-0.19	16.09	30
3x996T	6265	63	12.84	13.11	15.99	12.75	13.03	15.90	12.93	13.05	16.00	-2.45	-4.02	-0.19	15.81	30
UNII5	6105	31	13.44	13.34	16.40	13.36	13.37	16.37	13.42	13.34	16.39	-2.45	-4.02	-0.19	16.21	30
2x996T+484T	6265	63	13.15	13.25	16.21	13.11	13.15	16.14	12.99	13.22	16.12	-2.45	-4.02	-0.19	16.02	30
UNII5	6105	31	13.36	13.22	16.30	13.35	13.26	16.31	13.34	13.21	16.29	-2.45	-4.02	-0.19	16.12	30
3x996T+484T	6265	63	12.90	13.10	16.01	12.85	13.04	15.96	12.91	13.04	15.99	-2.45	-4.02	-0.19	15.82	30

10.3.3 E.I.R.P Output Power(Very Low Power Device)

Very Low Power Device Limit : 14 dBm(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power(dBm) + ANT2 Max. Output Power(dBm)
- EIRP Output Power (dBm) = MIMO Max. Output Power(dBm) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.3.3.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-4.46	-7.06	-2.56	-4.87	-7.30	-2.91	-4.59	-6.92	-2.59	-2.45	-4.02	-0.19	-2.75	14
	6175	45	-4.65	-7.63	-2.88	-4.70	-7.61	-2.91	-4.60	-7.51	-2.81	-2.45	-4.02	-0.19	-3.00	14
	6415	93	-5.18	-6.30	-2.69	-5.40	-6.64	-2.97	-4.97	-6.26	-2.56	-2.45	-4.02	-0.19	-2.75	14
UNII7	6535	117	-4.57	-5.25	-1.89	-4.89	-5.72	-2.28	-4.48	-5.43	-1.92	-3.96	-5.08	-1.49	-3.38	14
	6695	149	-4.01	-4.53	-1.25	-4.24	-4.94	-1.57	-4.08	-4.65	-1.35	-3.96	-5.08	-1.49	-2.74	14
	6855	181	-4.39	-6.46	-2.29	-4.83	-6.77	-2.68	-4.58	-6.39	-2.38	-3.96	-5.08	-1.49	-3.78	14
Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-1.62	-4.14	0.31	-1.66	-4.30	0.23	-1.65	-4.04	0.33	-2.45	-4.02	-0.19	0.14	14
	6175	45	-1.62	-5.12	-0.02	-1.51	-4.98	0.10	-1.67	-4.98	-0.01	-2.45	-4.02	-0.19	-0.09	14
	6415	93	-2.68	-3.71	-0.15	-2.53	-3.61	-0.03	-2.50	-3.74	-0.07	-2.45	-4.02	-0.19	-0.22	14
UNII7	6535	117	-1.65	-2.29	1.05	-1.83	-2.57	0.83	-1.64	-2.47	0.98	-3.96	-5.08	-1.49	-0.44	14
	6695	149	-1.98	-2.56	0.75	-2.17	-2.79	0.54	-1.95	-2.68	0.71	-3.96	-5.08	-1.49	-0.74	14
	6855	181	-1.75	-3.98	0.29	-2.00	-4.18	0.06	-1.91	-3.94	0.20	-3.96	-5.08	-1.49	-1.20	14
Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	1.15	-0.36	3.47	-	-	-	1.16	-0.33	3.49	-2.45	-4.02	-0.19	3.30	14
	6175	45	1.55	-2.07	3.11	-	-	-	1.77	-1.79	3.35	-2.45	-4.02	-0.19	3.16	14
	6415	93	0.28	0.30	3.30	-	-	-	0.26	0.31	3.29	-2.45	-4.02	-0.19	3.11	14
UNII7	6535	117	0.60	0.70	3.66	-	-	-	0.57	0.68	3.63	-3.96	-5.08	-1.49	2.17	14
	6695	149	1.48	1.20	4.35	-	-	-	1.43	1.19	4.32	-3.96	-5.08	-1.49	2.86	14
	6855	181	1.73	1.17	4.47	-	-	-	1.61	1.26	4.45	-3.96	-5.08	-1.49	2.98	14
Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	2.83	1.65	5.29	-	-	-	-2.45	-4.02	-0.19	5.10	14
	6175	45	-	-	-	3.29	2.64	5.98	-	-	-	-2.45	-4.02	-0.19	5.79	14
	6415	93	-	-	-	2.11	2.73	5.44	-	-	-	-2.45	-4.02	-0.19	5.25	14
UNII7	6535	117	-	-	-	4.68	4.47	7.59	-	-	-	-3.96	-5.08	-1.49	6.10	14
	6695	149	-	-	-	5.42	4.68	8.08	-	-	-	-3.96	-5.08	-1.49	6.59	14
	6855	181	-	-	-	5.44	4.61	8.05	-	-	-	-3.96	-5.08	-1.49	6.56	14

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5935	2	-	-	-	2.90	1.75	5.38	-	-	-	-2.45	-4.02	-0.19	5.19	14
	6175	45	-	-	-	3.39	2.76	6.09	-	-	-	-2.45	-4.02	-0.19	5.90	14
	6415	93	-	-	-	2.20	2.85	5.55	-	-	-	-2.45	-4.02	-0.19	5.36	14
UNII7	6535	117	-	-	-	4.29	4.07	7.19	-	-	-	-3.96	-5.08	-1.49	5.70	14
	6695	149	-	-	-	5.05	4.32	7.71	-	-	-	-3.96	-5.08	-1.49	6.22	14
	6855	181	-	-	-	5.08	4.23	7.69	-	-	-	-3.96	-5.08	-1.49	6.20	14

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-4.53	-6.94	-2.56	-4.77	-6.97	-2.72	-4.63	-6.72	-2.54	-2.45	-4.02	-0.19	-2.73	14
	6165	43	-4.60	-7.77	-2.89	-4.66	-7.74	-2.92	-4.45	-7.45	-2.69	-2.45	-4.02	-0.19	-2.88	14
	6405	91	-5.14	-6.23	-2.64	-5.09	-6.31	-2.65	-4.78	-6.22	-2.43	-2.45	-4.02	-0.19	-2.62	14
UNII7	6565	123	-4.50	-5.52	-1.97	-4.55	-5.81	-2.13	-4.33	-5.78	-1.98	-3.96	-5.08	-1.49	-3.46	14
	6685	147	-4.09	-4.93	-1.48	-4.02	-5.29	-1.60	-4.04	-5.30	-1.61	-3.96	-5.08	-1.49	-2.97	14
	6845	179	-4.09	-6.25	-2.02	-4.39	-6.44	-2.28	-4.44	-6.25	-2.24	-3.96	-5.08	-1.49	-3.51	14

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-1.93	-4.11	0.12	-2.18	-4.15	-0.04	-2.04	-3.91	0.14	-2.45	-4.02	-0.19	-0.05	14
	6165	43	-1.37	-4.94	0.21	-1.49	-4.92	0.13	-1.33	-4.62	0.34	-2.45	-4.02	-0.19	0.15	14
	6405	91	-2.35	-3.47	0.14	-2.32	-3.61	0.09	-2.02	-3.46	0.33	-2.45	-4.02	-0.19	0.14	14
UNII7	6565	123	-1.53	-2.51	1.02	-1.61	-2.84	0.83	-1.37	-2.78	1.00	-3.96	-5.08	-1.49	-0.47	14
	6685	147	-1.16	-2.37	1.29	-1.34	-2.78	1.01	-1.16	-2.74	1.13	-3.96	-5.08	-1.49	-0.20	14
	6845	179	-1.09	-3.26	0.97	-1.41	-3.46	0.70	-1.38	-3.26	0.79	-3.96	-5.08	-1.49	-0.52	14

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	0.77	-0.90	3.02	0.62	-1.01	2.89	0.88	-0.79	3.14	-2.45	-4.02	-0.19	2.95	14
	6165	43	0.91	-3.37	2.29	0.95	-3.35	2.32	0.96	-3.06	2.41	-2.45	-4.02	-0.19	2.22	14
	6405	91	-0.28	0.26	3.01	-0.38	0.20	2.93	-0.16	0.40	3.14	-2.45	-4.02	-0.19	2.95	14
UNII7	6565	123	0.37	0.40	3.40	0.20	0.31	3.26	0.33	0.46	3.40	-3.96	-5.08	-1.49	1.91	14
	6685	147	1.32	1.12	4.23	1.09	0.91	4.01	1.22	1.00	4.12	-3.96	-5.08	-1.49	2.74	14
	6845	179	1.50	0.99	4.26	1.25	0.88	4.08	1.24	1.07	4.17	-3.96	-5.08	-1.49	2.77	14

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	4.30	2.60	6.54	-	-	-	4.38	2.67	6.62	-2.45	-4.02	-0.19	6.43	14
	6165	43	3.14	2.63	5.91	-	-	-	3.20	2.57	5.91	-2.45	-4.02	-0.19	5.72	14
	6405	91	3.00	3.51	6.27	-	-	-	3.12	3.63	6.39	-2.45	-4.02	-0.19	6.20	14
UNII7	6565	123	4.56	4.24	7.42	-	-	-	4.57	4.25	7.42	-3.96	-5.08	-1.49	5.93	14
	6685	147	5.02	4.24	7.66	-	-	-	5.00	4.17	7.61	-3.96	-5.08	-1.49	6.17	14
	6845	179	5.45	4.51	8.02	-	-	-	5.30	4.53	7.94	-3.96	-5.08	-1.49	6.53	14

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-	-	-	6.56	4.69	8.74	-	-	-	-2.45	-4.02	-0.19	8.55	14
	6165	43	-	-	-	6.94	5.98	9.50	-	-	-	-2.45	-4.02	-0.19	9.31	14
	6405	91	-	-	-	5.54	5.93	8.75	-	-	-	-2.45	-4.02	-0.19	8.56	14
UNII7	6565	123	-	-	-	6.94	7.21	10.09	-	-	-	-3.96	-5.08	-1.49	8.60	14
	6685	147	-	-	-	8.10	7.78	10.95	-	-	-	-3.96	-5.08	-1.49	9.46	14
	6845	179	-	-	-	7.94	7.73	10.85	-	-	-	-3.96	-5.08	-1.49	9.36	14

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-	-	-	6.01	4.56	8.36	-	-	-	-2.45	-4.02	-0.19	8.17	14
	6165	43	-	-	-	6.98	5.71	9.40	-	-	-	-2.45	-4.02	-0.19	9.21	14
	6405	91	-	-	-	5.30	5.61	8.47	-	-	-	-2.45	-4.02	-0.19	8.28	14
UNII7	6565	123	-	-	-	7.28	7.28	10.29	-	-	-	-3.96	-5.08	-1.49	8.80	14
	6685	147	-	-	-	8.10	7.98	11.05	-	-	-	-3.96	-5.08	-1.49	9.56	14
	6845	179	-	-	-	8.22	7.97	11.11	-	-	-	-3.96	-5.08	-1.49	9.62	14

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-4.67	-7.23	-2.75	-4.87	-7.02	-2.80	-4.85	-6.81	-2.71	-2.45	-4.02	-0.19	-2.90	14
	6145	39	-4.74	-7.28	-2.81	-4.89	-7.36	-2.94	-4.81	-7.00	-2.75	-2.45	-4.02	-0.19	-2.94	14
	6385	87	-5.14	-6.12	-2.59	-5.16	-6.28	-2.67	-4.76	-6.19	-2.40	-2.45	-4.02	-0.19	-2.59	14
UNII7	6625	135	-5.00	-5.10	-2.04	-4.78	-5.53	-2.13	-4.46	-5.46	-1.92	-3.96	-5.08	-1.49	-3.41	14
	6705	151	-4.25	-5.44	-1.80	-4.20	-5.85	-1.94	-4.09	-6.03	-1.94	-3.96	-5.08	-1.49	-3.29	14
	6785	167	-4.04	-5.24	-1.58	-4.17	-5.53	-1.78	-4.11	-5.54	-1.75	-3.96	-5.08	-1.49	-3.07	14

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-1.75	-4.30	0.17	-1.88	-4.10	0.16	-1.89	-3.88	0.24	-2.45	-4.02	-0.19	0.05	14
	6145	39	-1.91	-4.48	0.00	-1.99	-4.52	-0.06	-1.89	-4.15	0.14	-2.45	-4.02	-0.19	-0.05	14
	6385	87	-2.55	-3.57	-0.02	-2.61	-3.61	-0.07	-2.19	-3.64	0.16	-2.45	-4.02	-0.19	-0.03	14
UNII7	6625	135	-1.96	-1.94	1.06	-1.73	-2.32	0.99	-1.40	-2.29	1.19	-3.96	-5.08	-1.49	-0.30	14
	6705	151	-1.10	-2.30	1.35	-1.11	-2.75	1.16	-1.01	-2.89	1.16	-3.96	-5.08	-1.49	-0.14	14
	6785	167	-1.42	-2.69	1.00	-1.68	-2.96	0.74	-1.60	-2.98	0.78	-3.96	-5.08	-1.49	-0.49	14

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	0.29	-0.46	2.94	0.10	-0.30	2.91	0.14	-0.41	2.88	-2.45	-4.02	-0.19	2.75	14
	6145	39	0.79	-1.00	3.00	0.75	-1.02	2.97	0.84	-0.69	3.15	-2.45	-4.02	-0.19	2.96	14
	6385	87	0.58	-0.46	3.10	0.59	-0.39	3.14	0.94	-0.34	3.36	-2.45	-4.02	-0.19	3.17	14
UNII7	6625	135	0.56	0.47	3.53	0.71	0.44	3.59	0.81	0.69	3.76	-3.96	-5.08	-1.49	2.27	14
	6705	151	1.20	1.01	4.12	1.11	0.82	3.98	1.05	0.81	3.94	-3.96	-5.08	-1.49	2.63	14
	6785	167	1.02	0.95	4.00	0.79	0.85	3.83	0.82	0.92	3.88	-3.96	-5.08	-1.49	2.51	14

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	3.52	2.65	6.12	3.53	2.75	6.17	3.77	2.84	6.34	-2.45	-4.02	-0.19	6.15	14
	6145	39	3.53	2.89	6.23	3.56	2.82	6.21	3.57	3.07	6.34	-2.45	-4.02	-0.19	6.15	14
	6385	87	2.68	3.06	5.88	2.61	3.02	5.83	2.72	3.16	5.95	-2.45	-4.02	-0.19	5.76	14
UNII7	6625	135	4.88	4.37	7.64	5.01	4.46	7.75	5.18	4.62	7.92	-3.96	-5.08	-1.49	6.43	14
	6705	151	5.48	4.76	8.14	5.43	4.66	8.07	5.36	4.58	8.00	-3.96	-5.08	-1.49	6.65	14
	6785	167	4.81	4.11	7.48	4.71	4.07	7.41	4.69	4.06	7.39	-3.96	-5.08	-1.49	5.99	14

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	6.59	4.94	8.85	-	-	-	6.73	5.08	8.99	-2.45	-4.02	-0.19	8.80	14
	6145	39	6.73	5.82	9.31	-	-	-	6.82	5.98	9.43	-2.45	-4.02	-0.19	9.24	14
	6385	87	5.53	5.80	8.68	-	-	-	5.57	5.89	8.75	-2.45	-4.02	-0.19	8.56	14
UNII7	6625	135	7.84	7.74	10.80				8.03	7.84	10.95	-3.96	-5.08	-1.49	9.46	14
	6705	151	7.51	7.10	10.32	-	-	-	7.42	6.97	10.21	-3.96	-5.08	-1.49	8.83	14
	6785	167	7.28	7.08	10.19				7.27	7.05	10.17	-3.96	-5.08	-1.49	8.70	14

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5985	7	-	-	-	9.86	8.37	12.18	-	-	-	-2.45	-4.02	-0.19	11.99	14
	6145	39	-	-	-	9.61	9.21	12.42	-	-	-	-2.45	-4.02	-0.19	12.23	14
	6385	87	-	-	-	8.42	9.00	11.73	-	-	-	-2.45	-4.02	-0.19	11.54	14
UNII7	6625	135				10.02	9.75	12.90				-3.96	-5.08	-1.49	11.41	14
	6705	151	-	-	-	10.31	10.06	13.20	-	-	-	-3.96	-5.08	-1.49	11.71	14
	6785	167				10.09	10.05	13.08				-3.96	-5.08	-1.49	11.59	14

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-	-	-	10.15	8.66	12.48	-	-	-	-2.45	-4.02	-0.19	12.29	14
	6145	39	-	-	-	9.98	9.52	12.77	-	-	-	-2.45	-4.02	-0.19	12.58	14
	6385	87	-	-	-	8.86	9.38	12.14	-	-	-	-2.45	-4.02	-0.19	11.95	14
UNII7	6625	135				10.78	10.53	13.67				-3.96	-5.08	-1.49	12.18	14
	6705	151	-	-	-	11.07	10.67	13.88	-	-	-	-3.96	-5.08	-1.49	12.39	14
	6785	167				10.86	10.79	13.83				-3.96	-5.08	-1.49	12.34	14

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.76	-7.50	-2.91	-4.38	-6.86	-2.44	-4.35	-6.61	-2.32	-2.45	-4.02	-0.19	-2.51	14
	6185	47	-4.35	-8.05	-2.81	-4.05	-7.58	-2.46	-4.08	-7.24	-2.36	-2.45	-4.02	-0.19	-2.55	14
	6345	79	-4.21	-6.49	-2.19	-4.10	-6.06	-1.96	-4.04	-5.99	-1.89	-2.45	-4.02	-0.19	-2.08	14
UNII7	6665	143	-5.54	-5.62	-2.57	-4.81	-5.52	-2.14	-4.48	-5.48	-1.94	-3.96	-5.08	-1.49	-3.43	14

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	-1.80	-4.56	0.05	-1.42	-3.90	0.53	-1.35	-3.63	0.66	-2.45	-4.02	-0.19	0.47	14
	6185	47	-1.30	-5.16	0.19	-1.08	-4.70	0.49	-1.03	-4.28	0.65	-2.45	-4.02	-0.19	0.46	14
	6345	79	-1.23	-3.72	0.71	-1.09	-3.12	1.02	-1.11	-3.03	1.04	-2.45	-4.02	-0.19	0.85	14
UNII7	6665	143	-2.46	-2.58	0.49	-1.83	-2.48	0.87	-1.49	-2.45	1.07	-3.96	-5.08	-1.49	-0.42	14

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	0.51	0.52	3.53	0.84	0.78	3.82	1.04	0.90	3.98	-2.45	-4.02	-0.19	3.79	14
	6185	47	1.23	0.38	3.84	1.33	0.50	3.95	1.47	0.72	4.12	-2.45	-4.02	-0.19	3.93	14
	6345	79	0.30	0.56	3.44	0.14	0.70	3.44	0.16	0.74	3.47	-2.45	-4.02	-0.19	3.28	14
UNII7	6665	143	0.47	0.53	3.51	0.76	0.67	3.72	0.88	0.90	3.90	-3.96	-5.08	-1.49	2.41	14

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	4.11	3.74	6.94	4.21	3.81	7.03	4.49	3.97	7.25	-2.45	-4.02	-0.19	7.06	14
	6185	47	4.61	3.62	7.15	4.57	3.66	7.15	4.77	3.72	7.29	-2.45	-4.02	-0.19	7.10	14
	6345	79	4.64	4.21	7.44	4.54	4.25	7.41	4.51	4.38	7.45	-2.45	-4.02	-0.19	7.26	14
UNII7	6665	143	4.83	4.40	7.63	4.94	4.42	7.70	5.17	4.65	7.93	-3.96	-5.08	-1.49	6.44	14

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	6.69	6.68	9.70	-	-	-	6.95	6.82	9.90	-2.45	-4.02	-0.19	9.71	14
	6185	47	7.48	6.12	9.86	-	-	-	7.64	6.37	10.06	-2.45	-4.02	-0.19	9.87	14
	6345	79	7.13	7.16	10.15	-	-	-	7.07	7.26	10.18	-2.45	-4.02	-0.19	9.99	14
UNII7	6665	143	8.00	7.95	10.99	-	-	-	8.23	8.11	11.18	-3.96	-5.08	-1.49	9.69	14

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	10.31	10.43	13.38	-	-	-	-2.45	-4.02	-0.19	13.19	14
	6185	47	-	-	-	10.79	9.99	13.42	-	-	-	-2.45	-4.02	-0.19	13.23	14
	6345	79	-	-	-	9.73	10.04	12.90	-	-	-	-2.45	-4.02	-0.19	12.71	14
UNII7	6665	143	-	-	-	11.01	10.93	13.98	-	-	-	-3.96	-5.08	-1.49	12.49	14

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-4.49	-6.52	-2.38	-4.65	-6.54	-2.48	-5.06	-6.85	-2.86	-2.45	-4.02	-0.19	-2.57	14
	6185	47	-4.03	-7.15	-2.30	-4.05	-6.97	-2.26	-4.19	-7.17	-2.42	-2.45	-4.02	-0.19	-2.45	14
	6345	79	-4.02	-5.94	-1.86	-4.04	-6.02	-1.91	-4.14	-6.30	-2.07	-2.45	-4.02	-0.19	-2.05	14
UNII7	6665	143	-4.54	-5.56	-2.01	-4.42	-5.96	-2.11	-4.75	-6.46	-2.51	-3.96	-5.08	-1.49	-3.50	14

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	-1.31	-3.60	0.70	-1.50	-3.65	0.57	-1.86	-3.92	0.24	-2.45	-4.02	-0.19	0.51	14
	6185	47	-1.08	-4.22	0.64	-1.14	-4.08	0.64	-1.22	-4.25	0.54	-2.45	-4.02	-0.19	0.45	14
	6345	79	-1.20	-3.43	0.83	-1.17	-3.57	0.80	-1.13	-3.84	0.73	-2.45	-4.02	-0.19	0.64	14
UNII7	6665	143	-1.48	-2.55	1.03	-1.47	-3.01	0.84	-1.73	-3.50	0.48	-3.96	-5.08	-1.49	-0.46	14

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.09	0.96	4.03	1.10	0.92	4.02	0.96	0.76	3.87	-2.45	-4.02	-0.19	3.84	14
	6185	47	1.13	0.68	3.92	1.17	0.88	4.04	1.01	0.79	3.91	-2.45	-4.02	-0.19	3.85	14
	6345	79	0.14	0.74	3.46	0.03	0.78	3.43	0.10	0.80	3.47	-2.45	-4.02	-0.19	3.28	14
UNII7	6665	143	0.94	0.88	3.92	0.91	0.74	3.84	0.73	0.65	3.70	-3.96	-5.08	-1.49	2.43	14

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	5.02	4.53	7.79	5.01	4.48	7.77	4.96	4.40	7.70	-2.45	-4.02	-0.19	7.60	14
	6185	47	4.83	3.64	7.29	4.86	3.73	7.34	4.78	3.85	7.35	-2.45	-4.02	-0.19	7.16	14
	6345	79	3.67	3.79	6.74	3.58	3.79	6.70	3.64	3.97	6.82	-2.45	-4.02	-0.19	6.63	14
UNII7	6665	143	5.17	4.61	7.91	5.12	4.53	7.85	5.07	4.45	7.78	-3.96	-5.08	-1.49	6.42	14

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	7.04	6.88	9.97	-	-	-	7.02	6.78	9.91	-2.45	-4.02	-0.19	9.78	14
	6185	47	7.74	6.65	10.24	-	-	-	7.71	6.79	10.28	-2.45	-4.02	-0.19	10.09	14
	6345	79	6.67	6.72	9.70	-	-	-	6.75	6.82	9.80	-2.45	-4.02	-0.19	9.61	14
UNII7	6665	143	8.27	8.10	11.20	-	-	-	8.21	7.99	11.11	-3.96	-5.08	-1.49	9.71	14

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	9.98	9.94	12.97	-	-	-	-2.45	-4.02	-0.19	12.78	14
	6185	47	-	-	-	10.48	10.03	13.27	-	-	-	-2.45	-4.02	-0.19	13.08	14
	6345	79	-	-	-	10.44	10.85	13.66	-	-	-	-2.45	-4.02	-0.19	13.47	14
UNII7	6665	143	-	-	-	11.14	10.92	14.04	-	-	-	-3.96	-5.08	-1.49	12.55	14

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-	-	-	10.65	10.47	13.58	-	-	-	-2.45	-4.02	-0.19	13.39	14
	6185	47	-	-	-	11.14	10.20	13.71	-	-	-	-2.45	-4.02	-0.19	13.52	14
	6345	79	-	-	-	9.98	10.29	13.14	-	-	-	-2.45	-4.02	-0.19	12.95	14
UNII7	6665	143	-	-	-	10.50	10.38	13.45	-	-	-	-3.96	-5.08	-1.49	11.96	14

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	-	-	-	10.80	10.61	13.72	-	-	-	-2.45	-4.02	-0.19	13.53	14
	6185	47	-	-	-	10.71	10.27	13.51	-	-	-	-2.45	-4.02	-0.19	13.32	14
	6345	79	-	-	-	10.06	10.37	13.23	-	-	-	-2.45	-4.02	-0.19	13.04	14
UNII7	6665	143	-	-	-	11.12	10.94	14.04	-	-	-	-3.96	-5.08	-1.49	12.55	14

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	-4.37	-8.19	-2.86	-4.02	-7.46	-2.40	-4.02	-7.02	-2.26	-2.45	-4.02	-0.19	-2.45	14
	6265	63	-4.57	-8.70	-3.15	-4.22	-8.17	-2.75	-4.08	-7.37	-2.41	-2.45	-4.02	-0.19	-2.60	14
UNII5 52T	6105	31	-1.36	-5.18	0.15	-1.12	-4.46	0.53	-1.07	-4.06	0.70	-2.45	-4.02	-0.19	0.51	14
	6265	63	-1.57	-5.90	-0.21	-1.20	-5.30	0.23	-1.01	-4.51	0.59	-2.45	-4.02	-0.19	0.40	14
UNII5 106T	6105	31	0.51	0.16	3.35	0.81	0.40	3.62	1.05	0.58	3.83	-2.45	-4.02	-0.19	3.64	14
	6265	63	0.28	-0.31	3.01	0.36	-0.23	3.09	0.61	0.09	3.37	-2.45	-4.02	-0.19	3.18	14
UNII5 242T	6105	31	4.13	3.34	6.76	4.22	3.43	6.85	4.45	3.55	7.04	-2.45	-4.02	-0.19	6.85	14
	6265	63	4.10	3.05	6.62	4.08	2.99	6.58	4.25	3.35	6.83	-2.45	-4.02	-0.19	6.64	14
UNII5 484T	6105	31	6.88	6.35	9.64	-	-	-	7.00	6.45	9.74	-2.45	-4.02	-0.19	9.55	14
	6265	63	6.50	6.00	9.27	-	-	-	6.54	6.22	9.40	-2.45	-4.02	-0.19	9.21	14
UNII5 996T	6105	31	-	-	-	9.94	9.75	12.86	-	-	-	-2.45	-4.02	-0.19	12.67	14
	6265	63	-	-	-	9.56	9.09	12.34	-	-	-	-2.45	-4.02	-0.19	12.15	14

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 26T	6105	31	-4.03	-8.22	-2.63	-4.29	-7.37	-2.55	-4.05	-6.62	-2.14	-2.45	-4.02	-0.19	-2.33	14
	6265	63	-4.21	-8.54	-2.85	-4.33	-7.42	-2.60	-4.04	-6.42	-2.06	-2.45	-4.02	-0.19	-2.25	14
UNII5 52T	6105	31	-1.84	-5.23	-0.20	-1.30	-4.56	0.38	-1.04	-3.79	0.81	-2.45	-4.02	-0.19	0.62	14
	6265	63	-1.73	-5.38	-0.17	-1.37	-4.55	0.34	-1.02	-3.59	0.89	-2.45	-4.02	-0.19	0.70	14
UNII5 106T	6105	31	0.92	0.47	3.71	0.84	0.40	3.63	1.13	0.46	3.82	-2.45	-4.02	-0.19	3.63	14
	6265	63	0.57	0.09	3.35	0.65	0.24	3.46	0.74	0.49	3.62	-2.45	-4.02	-0.19	3.43	14
UNII5 242T	6105	31	4.53	3.36	7.00	4.52	3.50	7.05	4.44	3.38	6.95	-2.45	-4.02	-0.19	6.86	14
	6265	63	4.36	3.49	6.96	4.37	3.56	6.99	4.25	3.65	6.97	-2.45	-4.02	-0.19	6.80	14
UNII5 484T	6105	31	7.11	6.46	9.81	-	-	-	7.04	6.35	9.72	-2.45	-4.02	-0.19	9.62	14
	6265	63	6.75	6.48	9.63	-	-	-	6.67	6.58	9.64	-2.45	-4.02	-0.19	9.45	14
UNII5 996T	6105	31	-	-	-	10.08	9.72	12.91	-	-	-	-2.45	-4.02	-0.19	12.72	14
	6265	63	-	-	-	9.76	9.47	12.63	-	-	-	-2.45	-4.02	-0.19	12.44	14

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	-4.04	-6.80	-2.19	-4.75	-7.50	-2.90	-5.39	-7.89	-3.45	-2.45	-4.02	-0.19	-2.38	14
26T	6265	63	-4.36	-6.81	-2.41	-4.81	-7.15	-2.81	-5.49	-7.78	-3.48	-2.45	-4.02	-0.19	-2.60	14
UNII5	6105	31	-1.05	-3.88	0.77	-1.75	-4.67	0.04	-2.32	-4.98	-0.44	-2.45	-4.02	-0.19	0.58	14
52T	6265	63	-1.06	-3.63	0.85	-1.87	-4.34	0.08	-2.45	-4.82	-0.47	-2.45	-4.02	-0.19	0.66	14
UNII5	6105	31	1.05	0.48	3.78	1.05	0.50	3.79	0.94	0.50	3.73	-2.45	-4.02	-0.19	3.60	14
106T	6265	63	0.63	0.44	3.55	0.42	0.49	3.47	0.14	0.25	3.20	-2.45	-4.02	-0.19	3.36	14
UNII5	6105	31	4.31	3.32	6.86	4.23	3.23	6.77	4.44	3.58	7.04	-2.45	-4.02	-0.19	6.85	14
242T	6265	63	4.10	3.61	6.88	4.02	3.59	6.82	3.95	3.67	6.82	-2.45	-4.02	-0.19	6.69	14
UNII5	6105	31	7.00	6.22	9.64	-	-	-	7.00	6.39	9.72	-2.45	-4.02	-0.19	9.53	14
484T	6265	63	6.56	6.54	9.56	-	-	-	6.69	6.60	9.66	-2.45	-4.02	-0.19	9.47	14
UNII5	6105	31	-	-	-	9.94	9.57	12.77	-	-	-	-2.45	-4.02	-0.19	12.58	14
996T	6265	63	-	-	-	9.55	9.48	12.53	-	-	-	-2.45	-4.02	-0.19	12.34	14

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6105	31	-4.04	-6.57	-2.12	-4.22	-6.71	-2.27	-4.68	-6.92	-2.65	-2.45	-4.02	-0.19	-2.31	14
26T	6265	63	-4.29	-6.52	-2.25	-4.50	-6.89	-2.52	-4.39	-7.05	-2.51	-2.45	-4.02	-0.19	-2.44	14
UNII5	6105	31	-1.09	-3.53	0.87	-1.17	-3.64	0.78	-1.55	-3.86	0.46	-2.45	-4.02	-0.19	0.68	14
52T	6265	63	-1.14	-3.60	0.81	-1.47	-3.95	0.47	-1.38	-4.17	0.46	-2.45	-4.02	-0.19	0.62	14
UNII5	6105	31	1.12	0.80	3.97	1.11	0.93	4.03	0.96	0.90	3.94	-2.45	-4.02	-0.19	3.84	14
106T	6265	63	0.22	0.41	3.33	0.09	0.41	3.26	0.19	0.51	3.36	-2.45	-4.02	-0.19	3.17	14
UNII5	6105	31	4.49	3.69	7.12	4.54	3.79	7.19	4.46	3.89	7.19	-2.45	-4.02	-0.19	7.00	14
242T	6265	63	3.78	3.54	6.67	3.70	3.53	6.62	3.86	3.72	6.80	-2.45	-4.02	-0.19	6.61	14
UNII5	6105	31	7.13	6.67	9.92	-	-	-	7.05	6.79	9.93	-2.45	-4.02	-0.19	9.74	14
484T	6265	63	6.02	6.49	9.27	-	-	-	6.07	6.59	9.35	-2.45	-4.02	-0.19	9.16	14
UNII5	6105	31	-	-	-	10.08	10.04	13.07	-	-	-	-2.45	-4.02	-0.19	12.88	14
996T	6265	63	-	-	-	9.07	9.48	12.29	-	-	-	-2.45	-4.02	-0.19	12.10	14

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 160L	6105	31	-	-	-	11.42	10.60	14.04	-	-	-	-2.45	-4.02	-0.19	13.85	14
	6265	63	-	-	-	11.24	10.47	13.88	-	-	-	-2.45	-4.02	-0.19	13.69	14
UNII5 160U	6105	31	-	-	-	11.44	10.72	14.11	-	-	-	-2.45	-4.02	-0.19	13.92	14
	6265	63	-	-	-	10.86	10.76	13.82	-	-	-	-2.45	-4.02	-0.19	13.63	14

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5 4x996T	6105	31	-	-	-	10.11	9.54	12.84	-	-	-	-2.45	-4.02	-0.19	12.65	14
	6265	63	-	-	-	10.00	9.69	12.86	-	-	-	-2.45	-4.02	-0.19	12.67	14
UNII5 SU	6105	31	-	-	-	11.39	10.61	14.03	-	-	-	-2.45	-4.02	-0.19	13.84	14
	6265	63	-	-	-	11.01	10.56	13.80	-	-	-	-2.45	-4.02	-0.19	13.61	14

Mode : 802.11a																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-	-	-	3.91	2.40	6.23	-	-	-	-2.45	-4.02	-0.19	6.04	14
	6175	45	-	-	-	3.81	2.39	6.16	-	-	-	-2.45	-4.02	-0.19	5.97	14
	6415	93	-	-	-	2.69	3.31	6.02	-	-	-	-2.45	-4.02	-0.19	5.83	14
UNII7	6535	117	-	-	-	2.91	2.91	5.92	-	-	-	-3.96	-5.08	-1.49	4.43	14
	6695	149	-	-	-	3.66	2.56	6.15	-	-	-	-3.96	-5.08	-1.49	4.66	14
	6855	181	-	-	-	3.65	2.46	6.10	-	-	-	-3.96	-5.08	-1.49	4.61	14

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5935	2	-1.58	-3.25	0.67	-1.69	-3.36	0.57	-1.61	-3.22	0.67	-2.45	-4.02	-0.19	0.48	14
	6175	45	-1.62	-4.56	0.17	-1.73	-4.62	0.07	-1.61	-4.45	0.21	-2.45	-4.02	-0.19	0.02	14
	6415	93	-2.68	-3.74	-0.17	-2.76	-3.88	-0.27	-2.56	-3.74	-0.10	-2.45	-4.02	-0.19	-0.29	14
UNII7	6535	117	-1.72	-2.28	1.02	-1.76	-2.11	1.08	-1.53	-2.08	1.21	-3.96	-5.08	-1.49	-0.28	14
	6695	149	-1.98	-2.34	0.85	-2.09	-2.48	0.73	-1.97	-2.43	0.82	-3.96	-5.08	-1.49	-0.64	14
	6855	181	-1.68	-3.92	0.35	-1.81	-4.04	0.23	-1.75	-3.90	0.32	-3.96	-5.08	-1.49	-1.14	14

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	0.88	0.04	3.49	-	-	-	0.91	0.09	3.53	-2.45	-4.02	-0.19	3.34	14
	6165	43	1.32	-1.54	3.13	-	-	-	1.40	-1.44	3.22	-2.45	-4.02	-0.19	3.03	14
	6405	91	-0.25	0.24	3.01	-	-	-	-0.19	0.27	3.06	-2.45	-4.02	-0.19	2.87	14
UNII7	6565	123	0.32	0.79	3.57	-	-	-	0.31	0.78	3.56	-3.96	-5.08	-1.49	2.08	14
	6685	147	1.23	1.24	4.24	-	-	-	1.20	1.24	4.23	-3.96	-5.08	-1.49	2.75	14
	6845	179	1.42	1.09	4.27	-	-	-	1.35	1.17	4.27	-3.96	-5.08	-1.49	2.78	14

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5965	3	-1.98	-3.43	0.37	-2.11	-3.30	0.34	-2.02	-3.26	0.41	-2.45	-4.02	-0.19	0.22	14
	6165	43	-1.38	-4.41	0.37	-1.48	-4.45	0.29	-1.36	-4.20	0.46	-2.45	-4.02	-0.19	0.27	14
	6405	91	-2.67	-3.48	-0.05	-2.73	-3.38	-0.04	-2.39	-3.45	0.12	-2.45	-4.02	-0.19	-0.07	14
UNII7	6565	123	-1.43	-2.21	1.21	-1.49	-2.38	1.10	-1.23	-2.39	1.24	-3.96	-5.08	-1.49	-0.25	14
	6685	147	-1.20	-2.14	1.37	-1.36	-2.37	1.17	-1.18	-2.46	1.24	-3.96	-5.08	-1.49	-0.12	14
	6845	179	-1.07	-3.16	1.02	-1.17	-3.30	0.90	-1.01	-3.18	1.05	-3.96	-5.08	-1.49	-0.44	14

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.P	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	5965	3	0.64	-0.41	3.16	0.57	-0.49	3.08	0.79	-0.32	3.28	-2.45	-4.02	-0.19	3.09	14
	6165	43	0.82	-2.03	2.64	0.97	-2.01	2.74	0.86	-1.75	2.76	-2.45	-4.02	-0.19	2.57	14
	6405	91	-0.37	0.50	3.09	-0.41	0.42	3.04	-0.19	0.63	3.25	-2.45	-4.02	-0.19	3.06	14
UNII7	6565	123	0.24	0.66	3.46	0.14	0.58	3.37	0.28	0.71	3.51	-3.96	-5.08	-1.49	2.02	14
	6685	147	1.30	1.37	4.35	1.13	1.20	4.18	1.22	1.24	4.24	-3.96	-5.08	-1.49	2.86	14
	6845	179	1.45	1.12	4.30	1.25	1.04	4.16	1.24	1.16	4.21	-3.96	-5.08	-1.49	2.81	14

Mode : EHT80 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	-1.74	-3.33	0.55	-1.93	-3.20	0.49	-1.92	-2.92	0.62	-2.45	-4.02	-0.19	0.43	14
	6145	39	-2.03	-4.00	0.11	-2.18	-4.13	-0.03	-2.03	-3.78	0.19	-2.45	-4.02	-0.19	0.00	14
	6385	87	-3.08	-3.76	-0.40	-3.15	-3.85	-0.48	-2.75	-3.78	-0.23	-2.45	-4.02	-0.19	-0.42	14
UNII7	6625	135	-1.95	-1.61	1.23	-1.80	-1.90	1.16	-1.41	-1.95	1.34	-3.96	-5.08	-1.49	-0.15	14
	6705	151	-1.11	-2.01	1.47	-1.15	-2.39	1.28	-1.07	-2.61	1.24	-3.96	-5.08	-1.49	-0.02	14
	6785	167	-1.18	-2.42	1.26	-1.33	-2.70	1.05	-1.28	-2.86	1.02	-3.96	-5.08	-1.49	-0.23	14

Mode : EHT80 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	0.18	-1.33	2.50	0.05	-1.19	2.49	0.05	-0.96	2.58	-2.45	-4.02	-0.19	2.39	14
	6145	39	0.97	-1.04	3.10	0.84	-1.17	2.96	0.96	-0.83	3.17	-2.45	-4.02	-0.19	2.98	14
	6385	87	0.40	-0.31	3.07	0.34	-0.39	3.00	0.76	-0.33	3.26	-2.45	-4.02	-0.19	3.07	14
UNII7	6625	135	0.57	0.73	3.66	0.64	0.74	3.70	0.84	0.92	3.89	-3.96	-5.08	-1.49	2.40	14
	6705	151	1.23	1.24	4.24	1.12	1.11	4.12	1.03	1.04	4.05	-3.96	-5.08	-1.49	2.75	14
	6785	167	0.98	1.20	4.10	0.76	1.11	3.95	0.75	1.05	3.91	-3.96	-5.08	-1.49	2.61	14

Mode : EHT80 MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	5985	7	6.59	5.54	9.11	6.59	5.53	9.10	6.53	5.50	9.06	-2.45	-4.02	-0.19	8.92	14
	6145	39	6.75	6.60	9.69	6.77	6.63	9.71	6.74	6.58	9.67	-2.45	-4.02	-0.19	9.52	14
	6385	87	5.42	5.71	8.58	5.41	5.73	8.58	5.35	5.70	8.54	-2.45	-4.02	-0.19	8.39	14
UNII7	6625	135	8.07	8.12	11.11	8.03	8.12	11.09	7.98	8.05	11.03	-3.96	-5.08	-1.49	9.62	14
	6705	151	7.55	7.35	10.46	7.56	7.38	10.48	7.57	7.40	10.50	-3.96	-5.08	-1.49	9.01	14
	6785	167	7.30	7.37	10.35	7.35	7.37	10.37	7.36	7.41	10.39	-3.96	-5.08	-1.49	8.90	14

Mode : EHT160(80L) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	-1.64	-3.46	0.56	-1.40	-3.19	0.80	-1.32	-2.87	0.99	-2.45	-4.02	-0.19	0.80	14
	6185	47	-1.35	-4.42	0.39	-1.13	-4.21	0.60	-1.06	-3.74	0.82	-2.45	-4.02	-0.19	0.63	14
	6345	79	-1.12	-3.35	0.91	-1.16	-2.98	1.04	-1.06	-2.77	1.18	-2.45	-4.02	-0.19	0.99	14
UNII7	6665	143	-2.38	-2.27	0.68	-1.87	-2.21	0.97	-1.47	-2.15	1.21	-3.96	-5.08	-1.49	-0.28	14

Mode : EHT160(80L) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5	6025	15	0.52	1.34	3.96	0.74	1.51	4.15	0.96	1.61	4.31	-2.45	-4.02	-0.19	4.12	14
	6185	47	1.16	0.96	4.07	1.23	0.90	4.08	1.44	1.21	4.34	-2.45	-4.02	-0.19	4.15	14
	6345	79	0.22	0.85	3.56	0.22	0.93	3.60	0.16	1.00	3.61	-2.45	-4.02	-0.19	3.42	14
UNII7	6665	143	0.52	0.75	3.65	0.76	0.91	3.84	0.94	1.11	4.03	-3.96	-5.08	-1.49	2.54	14

Mode : EHT160(80L) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	6.80	6.92	9.87	6.77	6.96	9.88	6.70	6.98	9.85	-2.45	-4.02	-0.19	9.69	14
	6185	47	6.89	6.01	9.48	6.83	6.01	9.45	6.86	5.85	9.39	-2.45	-4.02	-0.19	9.29	14
	6345	79	6.98	6.96	9.98	6.99	6.95	9.98	6.99	6.90	9.96	-2.45	-4.02	-0.19	9.79	14
UNII7	6665	143	8.29	8.35	11.33	8.25	8.33	11.30	8.17	8.25	11.22	-3.96	-5.08	-1.49	9.84	14

Mode : EHT160(80U) MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	-1.33	-2.80	1.01	-1.51	-2.89	0.86	-1.93	-3.18	0.50	-2.45	-4.02	-0.19	0.82	14
	6185	47	-1.06	-3.48	0.91	-1.02	-3.42	0.95	-1.24	-3.37	0.83	-2.45	-4.02	-0.19	0.76	14
	6345	79	-1.42	-3.31	0.75	-1.44	-3.39	0.71	-1.27	-3.37	0.82	-2.45	-4.02	-0.19	0.63	14
UNII7	6665	143	-1.47	-2.29	1.15	-1.49	-2.65	0.98	-1.74	-3.21	0.60	-3.96	-5.08	-1.49	-0.34	14

Mode : EHT160(80U) MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	1.02	1.67	4.37	0.97	1.53	4.27	0.87	1.38	4.15	-2.45	-4.02	-0.19	4.18	14
	6185	47	0.97	0.98	3.99	1.01	1.00	4.02	0.86	1.01	3.95	-2.45	-4.02	-0.19	3.83	14
	6345	79	0.03	0.96	3.53	-0.05	0.89	3.46	0.10	1.09	3.63	-2.45	-4.02	-0.19	3.44	14
UNII7	6665	143	0.92	1.05	3.99	0.83	0.93	3.89	0.68	0.79	3.75	-3.96	-5.08	-1.49	2.50	14

Mode : EHT160(80U) MRU 484T+242T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	6.96	6.87	9.92	6.94	6.88	9.92	6.97	6.89	9.94	-2.45	-4.02	-0.19	9.75	14
	6185	47	6.94	6.52	9.75	6.92	6.47	9.71	6.97	6.44	9.72	-2.45	-4.02	-0.19	9.56	14
	6345	79	6.65	6.94	9.81	6.66	6.93	9.81	6.58	6.96	9.78	-2.45	-4.02	-0.19	9.62	14
UNII7	6665	143	8.27	8.24	11.26	8.30	8.26	11.29	8.31	8.30	11.32	-3.96	-5.08	-1.49	9.83	14

Mode : EHT160 MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6025	15	9.30	9.23	12.27	9.21	9.18	12.20	9.26	9.23	12.25	-2.45	-4.02	-0.19	12.08	14
	6185	47	9.70	9.31	12.52	9.63	9.21	12.43	9.59	9.06	12.34	-2.45	-4.02	-0.19	12.33	14
	6345	79	9.33	9.90	12.63	9.34	9.87	12.62	9.36	9.83	12.61	-2.45	-4.02	-0.19	12.44	14
UNII7	6665	143	11.22	11.22	14.23	11.17	11.17	14.18	11.22	11.22	14.23	-3.96	-5.08	-1.49	12.74	14

Mode : EHT320(80LL) MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 52T+26T	6105	31	-1.19	-4.30	0.54	-1.04	-3.87	0.78	-1.09	-3.26	0.97	-2.45	-4.02	-0.19	0.78	14
	6265	63	-1.54	-5.11	0.04	-1.41	-4.88	0.20	-1.12	-4.04	0.67	-2.45	-4.02	-0.19	0.48	14
UNII5 106T+26T	6105	31	0.71	1.17	3.96	0.91	1.33	4.13	1.15	1.45	4.31	-2.45	-4.02	-0.19	4.12	14
	6265	63	0.41	0.41	3.42	0.47	0.34	3.42	0.74	0.71	3.73	-2.45	-4.02	-0.19	3.54	14
UNII5 484T+242T	6105	31	6.85	6.89	9.88	6.82	6.87	9.86	6.74	6.84	9.80	-2.45	-4.02	-0.19	9.69	14
	6265	63	6.61	6.64	9.64	6.62	6.66	9.65	6.64	6.57	9.62	-2.45	-4.02	-0.19	9.46	14

Mode : EHT320(80LM) MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 52T+26T	6105	31	-2.00	-4.53	-0.07	-1.54	-3.99	0.41	-1.58	-3.21	0.69	-2.45	-4.02	-0.19	0.50	14
	6265	63	-2.18	-5.20	-0.42	-1.55	-4.34	0.28	-1.51	-3.30	0.70	-2.45	-4.02	-0.19	0.51	14
UNII5 106T+26T	6105	31	1.06	1.36	4.22	1.16	1.34	4.26	1.04	1.21	4.14	-2.45	-4.02	-0.19	4.07	14
	6265	63	0.63	0.71	3.68	0.87	0.90	3.89	0.67	0.92	3.81	-2.45	-4.02	-0.19	3.70	14
UNII5 484T+242T	6105	31	6.90	6.78	9.85	6.92	6.79	9.87	6.96	6.84	9.91	-2.45	-4.02	-0.19	9.72	14
	6265	63	6.68	6.78	9.74	6.68	6.76	9.73	6.67	6.77	9.73	-2.45	-4.02	-0.19	9.55	14

Mode : EHT320(80MH) MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 52T+26T	6105	31	-1.53	-3.19	0.73	-1.63	-3.89	0.40	-2.40	-4.44	-0.29	-2.45	-4.02	-0.19	0.54	14
	6265	63	-1.58	-3.36	0.63	-1.73	-3.86	0.34	-2.63	-4.59	-0.49	-2.45	-4.02	-0.19	0.44	14
UNII5 106T+26T	6105	31	0.99	1.23	4.12	0.77	0.90	3.84	0.99	1.19	4.10	-2.45	-4.02	-0.19	3.93	14
	6265	63	0.57	0.94	3.77	0.28	0.72	3.51	0.18	0.78	3.50	-2.45	-4.02	-0.19	3.58	14
UNII5 484T+242T	6105	31	6.81	6.66	9.74	6.82	6.68	9.76	6.75	6.61	9.69	-2.45	-4.02	-0.19	9.57	14
	6265	63	6.62	6.78	9.71	6.72	6.79	9.76	6.57	6.76	9.68	-2.45	-4.02	-0.19	9.57	14

Mode : EHT320(80HH) MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 52T+26T	6105	31	-1.09	-2.98	1.08	-1.20	-3.13	0.95	-1.71	-3.44	0.52	-2.45	-4.02	-0.19	0.89	14
	6265	63	-1.39	-3.38	0.74	-1.54	-3.45	0.62	-1.37	-3.40	0.74	-2.45	-4.02	-0.19	0.55	14
UNII5 106T+26T	6105	31	1.18	1.44	4.32	1.15	1.40	4.29	0.99	1.41	4.22	-2.45	-4.02	-0.19	4.13	14
	6265	63	0.21	0.85	3.55	0.07	0.75	3.43	0.31	0.97	3.66	-2.45	-4.02	-0.19	3.47	14
UNII5 484T+242T	6105	31	6.76	6.90	9.84	6.75	6.96	9.87	6.80	6.85	9.84	-2.45	-4.02	-0.19	9.68	14
	6265	63	5.84	6.37	9.12	5.85	6.39	9.14	5.75	6.29	9.04	-2.45	-4.02	-0.19	8.95	14

Mode : EHT320(160L/U) MRU 996T+484T																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	
UNII5 160L	6105	31	10.48	10.46	13.48	10.42	10.42	13.43	10.42	10.48	13.46	-2.45	-4.02	-0.19	13.29	14
	6265	63	10.08	10.11	13.11	10.02	10.06	13.05	10.01	9.94	12.99	-2.45	-4.02	-0.19	12.92	14
UNII5 160U	6105	31	9.94	10.20	13.08	9.88	10.11	13.01	9.87	10.07	12.98	-2.45	-4.02	-0.19	12.89	14
	6265	63	8.89	9.29	12.11	8.94	9.09	12.03	8.96	9.09	12.04	-2.45	-4.02	-0.19	11.92	14

Mode : EHT320 MRU																
Band	Freq. [MHz]	CH.	Total Average Power [dBm]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.P	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm]	[dBm]
UNII5	6105	31	10.91	10.79	13.86	10.90	10.83	13.87	10.91	10.79	13.86	-2.45	-4.02	-0.19	13.68	14
3x996T	6265	63	10.38	10.61	13.50	10.31	10.50	13.42	10.53	10.53	13.54	-2.45	-4.02	-0.19	13.35	14
UNII5	6105	31	11.00	10.93	13.98	10.92	10.96	13.95	10.99	10.92	13.96	-2.45	-4.02	-0.19	13.79	14
2x996T+484T	6265	63	10.80	10.70	13.76	10.74	10.58	13.67	10.57	10.65	13.62	-2.45	-4.02	-0.19	13.57	14
UNII5	6105	31	10.91	10.78	13.85	10.81	10.78	13.80	10.87	10.74	13.81	-2.45	-4.02	-0.19	13.66	14
3x996T+484T	6265	63	10.48	10.52	13.51	10.46	10.46	13.47	10.52	10.46	13.50	-2.45	-4.02	-0.19	13.32	14

10.4 POWER SPECTRAL DENSITY

10.4.1 Indoor client

Indoor client Limit : -1 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.4.1.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-3.956	-5.800	-1.770	-5.705	-7.336	-3.434	-4.380	-5.843	-2.040	-2.45	-4.02	-0.19	-1.960	-1
	6175	45	-3.977	-7.777	-2.464	-5.284	-8.664	-3.643	-3.610	-7.364	-2.083	-2.45	-4.02	-0.19	-2.273	-1
	6415	93	-3.552	-4.530	-1.003	-4.939	-6.458	-2.622	-3.486	-4.905	-1.127	-2.45	-4.02	-0.19	-1.193	-1
UNII6	6435	97	-3.405	-4.863	-1.063	-4.918	-6.662	-2.693	-3.598	-4.586	-1.053	-3.96	-5.08	-1.49	-2.543	-1
	6475	105	-4.121	-4.385	-1.240	-5.742	-6.004	-2.861	-4.147	-4.660	-1.385	-3.96	-5.08	-1.49	-2.730	-1
	6515	113	-4.044	-5.059	-1.511	-5.297	-6.354	-2.783	-3.994	-5.469	-1.659	-3.96	-5.08	-1.49	-3.001	-1
UNII7	6535	117	-4.395	-4.845	-1.604	-5.602	-6.340	-2.945	-4.237	-5.215	-1.688	-3.96	-5.08	-1.49	-3.094	-1
	6695	149	-3.470	-3.915	-0.676	-4.997	-5.412	-2.189	-3.333	-4.056	-0.669	-3.96	-5.08	-1.49	-2.159	-1
	6855	181	-3.220	-6.055	-1.400	-5.139	-7.705	-3.225	-3.721	-6.239	-1.790	-3.96	-5.08	-1.49	-2.890	-1
UNII8	6875	185	-3.719	-6.125	-1.747	-5.214	-7.431	-3.172	-3.904	-5.843	-1.756	-3.99	-5.26	-1.59	-3.337	-1
	6995	209	-4.075	-4.782	-1.404	-5.618	-6.064	-2.825	-4.169	-4.730	-1.430	-3.99	-5.26	-1.59	-2.994	-1
	7115	233	-4.378	-4.693	-1.522	-5.740	-6.170	-2.939	-4.280	-4.606	-1.429	-3.99	-5.26	-1.59	-3.019	-1

Mode : EHT20 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-4.548	-5.120	-1.814	-4.740	-5.530	-2.107	-4.467	-5.317	-1.861	-2.45	-4.02	-0.19	-2.004	-1
	6175	45	-4.335	-4.603	-1.456	-4.839	-4.826	-1.822	-4.492	-4.501	-1.486	-2.45	-4.02	-0.19	-1.646	-1
	6415	93	-4.997	-4.727	-1.849	-5.158	-4.658	-1.890	-4.902	-4.359	-1.611	-2.45	-4.02	-0.19	-1.801	-1
UNII6	6435	97	-4.650	-4.084	-1.347	-4.940	-4.225	-1.557	-4.471	-4.086	-1.264	-3.96	-5.08	-1.49	-2.754	-1
	6475	105	-4.662	-4.227	-1.429	-4.744	-4.387	-1.551	-4.514	-4.125	-1.305	-3.96	-5.08	-1.49	-2.795	-1
	6515	113	-4.393	-4.293	-1.332	-4.819	-4.634	-1.715	-4.797	-4.404	-1.586	-3.96	-5.08	-1.49	-2.822	-1
UNII7	6535	117	-4.616	-4.386	-1.489	-4.992	-4.614	-1.788	-5.070	-4.577	-1.806	-3.96	-5.08	-1.49	-2.979	-1
	6695	149	-3.876	-4.080	-0.966	-4.071	-4.364	-1.205	-3.933	-4.036	-0.974	-3.96	-5.08	-1.49	-2.456	-1
	6855	181	-3.484	-4.207	-0.820	-3.944	-4.522	-1.213	-3.689	-4.033	-0.847	-3.96	-5.08	-1.49	-2.310	-1
UNII8	6875	185	-3.770	-4.924	-1.298	-3.967	-5.065	-1.471	-3.887	-4.835	-1.325	-3.99	-5.26	-1.59	-2.888	-1
	6995	209	-4.259	-4.247	-1.242	-4.546	-4.498	-1.511	-4.485	-4.076	-1.265	-3.99	-5.26	-1.59	-2.832	-1
	7115	233	-5.371	-4.126	-1.694	-5.925	-4.528	-2.160	-5.638	-4.303	-1.909	-3.99	-5.26	-1.59	-3.284	-1

Mode : EHT20 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.204	-6.421	-1.510	-	-	-	-3.441	-6.451	-1.680	-2.45	-4.02	-0.19	-1.700	-1
	6175	45	-3.245	-5.322	-1.150	-	-	-	-3.452	-5.561	-1.369	-2.45	-4.02	-0.19	-1.340	-1
	6415	93	-4.314	-4.459	-1.375	-	-	-	-4.499	-4.210	-1.341	-2.45	-4.02	-0.19	-1.531	-1
UNII6	6435	97	-3.307	-3.405	-0.345	-	-	-	-3.270	-3.440	-0.343	-3.96	-5.08	-1.49	-1.833	-1
	6475	105	-3.144	-3.235	-0.179	-	-	-	-3.229	-3.463	-0.334	-3.96	-5.08	-1.49	-1.669	-1
	6515	113	-3.207	-3.444	-0.313	-	-	-	-3.556	-3.721	-0.627	-3.96	-5.08	-1.49	-1.803	-1
UNII7	6535	117	-3.526	-3.654	-0.579	-	-	-	-3.482	-3.610	-0.535	-3.96	-5.08	-1.49	-2.025	-1
	6695	149	-2.712	-3.337	-0.003	-	-	-	-2.588	-3.466	0.006	-3.96	-5.08	-1.49	-1.484	-1
	6855	181	-2.566	-3.672	-0.073	-	-	-	-2.744	-3.714	-0.191	-3.96	-5.08	-1.49	-1.563	-1
UNII8	6875	185	-2.591	-3.787	-0.137	-	-	-	-2.594	-3.636	-0.073	-3.99	-5.26	-1.59	-1.663	-1
	6995	209	-3.464	-3.003	-0.217	-	-	-	-3.714	-2.938	-0.298	-3.99	-5.26	-1.59	-1.807	-1
	7115	233	-4.086	-3.041	-0.521	-	-	-	-3.958	-2.899	-0.386	-3.99	-5.26	-1.59	-1.976	-1

Mode : EHT20 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-3.274	-4.895	-0.999	-	-	-	-2.45	-4.02	-0.19	-1.189	-1
	6175	45	-	-	-	-3.296	-4.456	-0.827	-	-	-	-2.45	-4.02	-0.19	-1.017	-1
	6415	93	-	-	-	-4.047	-4.136	-1.081	-	-	-	-2.45	-4.02	-0.19	-1.271	-1
UNII6	6435	97	-	-	-	-3.244	-3.464	-0.342	-	-	-	-3.96	-5.08	-1.49	-1.832	-1
	6475	105	-	-	-	-3.658	-3.344	-0.488	-	-	-	-3.96	-5.08	-1.49	-1.978	-1
	6515	113	-	-	-	-3.620	-3.622	-0.610	-	-	-	-3.96	-5.08	-1.49	-2.100	-1
UNII7	6535	117	-	-	-	-3.452	-3.527	-0.479	-	-	-	-3.96	-5.08	-1.49	-1.969	-1
	6695	149	-	-	-	-2.512	-2.665	0.423	-	-	-	-3.96	-5.08	-1.49	-1.067	-1
	6855	181	-	-	-	-2.489	-3.098	0.228	-	-	-	-3.96	-5.08	-1.49	-1.262	-1
UNII8	6875	185	-	-	-	-2.700	-3.908	-0.252	-	-	-	-3.99	-5.26	-1.59	-1.842	-1
	6995	209	-	-	-	-2.838	-2.471	0.360	-	-	-	-3.99	-5.26	-1.59	-1.230	-1
	7115	233	-	-	-	-4.041	-2.615	-0.259	-	-	-	-3.99	-5.26	-1.59	-1.849	-1

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-6.960	-8.088	-4.477	-	-	-	-2.45	-4.02	-0.19	-4.667	-1
	6175	45	-	-	-	-3.741	-4.311	-1.007	-	-	-	-2.45	-4.02	-0.19	-1.197	-1
	6415	93	-	-	-	-4.699	-4.819	-1.749	-	-	-	-2.45	-4.02	-0.19	-1.939	-1
UNII6	6435	97	-	-	-	-3.159	-3.003	-0.070	-	-	-	-3.96	-5.08	-1.49	-1.560	-1
	6475	105	-	-	-	-2.982	-2.898	0.070	-	-	-	-3.96	-5.08	-1.49	-1.420	-1
	6515	113	-	-	-	-3.277	-3.209	-0.233	-	-	-	-3.96	-5.08	-1.49	-1.723	-1
UNII7	6535	117	-	-	-	-3.435	-3.377	-0.396	-	-	-	-3.96	-5.08	-1.49	-1.886	-1
	6695	149	-	-	-	-2.658	-2.812	0.276	-	-	-	-3.96	-5.08	-1.49	-1.214	-1
	6855	181	-	-	-	-2.402	-3.035	0.303	-	-	-	-3.96	-5.08	-1.49	-1.187	-1
UNII8	6875	185	-	-	-	-2.509	-3.366	0.094	-	-	-	-3.99	-5.26	-1.59	-1.496	-1
	6995	209	-	-	-	-3.454	-3.104	-0.265	-	-	-	-3.99	-5.26	-1.59	-1.855	-1
	7115	233	-	-	-	-4.381	-2.845	-0.535	-	-	-	-3.99	-5.26	-1.59	-2.125	-1

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-3.944	-5.820	-1.771	-4.175	-5.613	-1.824	-4.244	-5.584	-1.852	-2.45	-4.02	-0.19	-1.961	-1
	6165	43	-3.619	-7.866	-2.232	-3.758	-7.459	-2.215	-3.135	-7.450	-1.767	-2.45	-4.02	-0.19	-1.957	-1
	6405	91	-3.715	-4.926	-1.268	-3.776	-4.905	-1.293	-3.301	-4.679	-0.925	-2.45	-4.02	-0.19	-1.115	-1
UNII6	6445	99	-3.442	-4.800	-1.058	-3.577	-5.026	-1.231	-3.367	-5.136	-1.152	-3.96	-5.08	-1.49	-2.548	-1
	6485	107	-3.923	-4.155	-1.027	-4.295	-4.637	-1.452	-3.955	-4.820	-1.356	-3.96	-5.08	-1.49	-2.517	-1
	6525	115	-3.778	-4.718	-1.212	-4.106	-5.350	-1.673	-3.691	-5.335	-1.425	-3.96	-5.08	-1.49	-2.702	-1
UNII7	6565	123	-3.818	-4.962	-1.342	-4.065	-5.131	-1.555	-3.858	-5.470	-1.579	-3.96	-5.08	-1.49	-2.832	-1
	6685	147	-3.301	-4.172	-0.704	-3.556	-4.686	-1.074	-3.145	-4.865	-0.910	-3.96	-5.08	-1.49	-2.194	-1
	6845	179	-3.397	-6.038	-1.509	-3.725	-6.546	-1.900	-3.558	-6.180	-1.664	-3.96	-5.08	-1.49	-2.999	-1
UNII8	6885	187	-3.906	-5.846	-1.758	-4.009	-6.375	-2.022	-3.783	-6.068	-1.766	-3.99	-5.26	-1.59	-3.348	-1
	7005	211	-3.775	-4.565	-1.142	-3.926	-4.807	-1.334	-4.511	-4.960	-1.719	-3.99	-5.26	-1.59	-2.732	-1
	7085	227	-3.549	-4.087	-0.799	-4.008	-4.242	-1.113	-3.961	-4.526	-1.224	-3.99	-5.26	-1.59	-2.389	-1

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-4.104	-5.462	-1.720	-3.983	-5.512	-1.670	-3.815	-5.520	-1.574	-2.45	-4.02	-0.19	-1.764	-1
	6165	43	-4.661	-4.718	-1.679	-4.294	-4.813	-1.536	-4.357	-4.939	-1.628	-2.45	-4.02	-0.19	-1.726	-1
	6405	91	-5.125	-4.312	-1.689	-5.149	-4.422	-1.760	-5.183	-3.988	-1.534	-2.45	-4.02	-0.19	-1.724	-1
UNII6	6445	99	-4.733	-4.325	-1.514	-4.886	-4.561	-1.710	-4.542	-4.094	-1.302	-3.96	-5.08	-1.49	-2.792	-1
	6485	107	-4.645	-4.342	-1.481	-4.771	-4.441	-1.593	-4.761	-4.413	-1.573	-3.96	-5.08	-1.49	-2.971	-1
	6525	115	-4.996	-4.532	-1.748	-5.096	-4.809	-1.940	-5.042	-4.677	-1.845	-3.96	-5.08	-1.49	-3.238	-1
UNII7	6565	123	-4.860	-4.771	-1.805	-5.008	-4.847	-1.917	-5.169	-4.894	-2.019	-3.96	-5.08	-1.49	-3.295	-1
	6685	147	-3.527	-4.020	-0.756	-4.075	-4.261	-1.157	-3.942	-4.392	-1.151	-3.96	-5.08	-1.49	-2.246	-1
	6845	179	-3.665	-4.475	-1.041	-3.932	-4.434	-1.166	-3.950	-4.341	-1.131	-3.96	-5.08	-1.49	-2.531	-1
UNII8	6885	187	-3.956	-5.161	-1.507	-4.167	-5.036	-1.570	-3.686	-4.804	-1.199	-3.99	-5.26	-1.59	-2.789	-1
	7005	211	-4.730	-4.298	-1.498	-5.033	-4.655	-1.830	-5.059	-4.536	-1.779	-3.99	-5.26	-1.59	-3.088	-1
	7085	227	-4.435	-3.315	-0.829	-5.030	-3.653	-1.277	-4.951	-3.437	-1.118	-3.99	-5.26	-1.59	-2.419	-1

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-3.381	-6.602	-1.689	-3.374	-6.850	-1.763	-3.223	-6.396	-1.515	-2.45	-4.02	-0.19	-1.705	-1
	6165	43	-3.636	-5.710	-1.540	-3.435	-5.670	-1.400	-3.527	-5.403	-1.354	-2.45	-4.02	-0.19	-1.544	-1
	6405	91	-4.547	-4.523	-1.525	-4.693	-4.659	-1.665	-4.457	-4.367	-1.401	-2.45	-4.02	-0.19	-1.591	-1
UNII6	6445	99	-3.251	-3.444	-0.336	-3.388	-3.545	-0.455	-3.229	-3.412	-0.309	-3.96	-5.08	-1.49	-1.799	-1
	6485	107	-3.422	-3.262	-0.331	-3.161	-3.572	-0.351	-3.380	-3.258	-0.308	-3.96	-5.08	-1.49	-1.798	-1
	6525	115	-3.056	-3.512	-0.268	-3.596	-3.584	-0.580	-3.616	-3.848	-0.720	-3.96	-5.08	-1.49	-1.758	-1
UNII7	6565	123	-3.163	-3.662	-0.395	-3.758	-3.797	-0.767	-3.373	-3.853	-0.596	-3.96	-5.08	-1.49	-1.885	-1
	6685	147	-2.602	-3.285	0.080	-2.841	-3.467	-0.132	-2.764	-3.528	-0.119	-3.96	-5.08	-1.49	-1.410	-1
	6845	179	-2.370	-3.795	-0.014	-2.649	-3.819	-0.184	-2.865	-3.658	-0.233	-3.96	-5.08	-1.49	-1.504	-1
UNII8	6885	187	-2.649	-3.822	-0.186	-2.873	-4.003	-0.391	-2.776	-3.635	-0.174	-3.99	-5.26	-1.59	-1.764	-1
	7005	211	-3.357	-2.973	-0.150	-3.820	-2.993	-0.376	-4.082	-2.928	-0.456	-3.99	-5.26	-1.59	-1.740	-1
	7085	227	-4.530	-3.123	-0.759	-4.765	-3.046	-0.811	-4.676	-3.192	-0.860	-3.99	-5.26	-1.59	-2.349	-1

Mode : EHT40 242T

Mode : EHT40 2427

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-3.224	-6.422	-1.525	-	-	-	-3.291	-6.288	-1.525	-2.45	-4.02	-0.19	-1.715	-1
	6165	43	-4.299	-5.343	-1.779	-	-	-	-4.269	-5.187	-1.693	-2.45	-4.02	-0.19	-1.883	-1
	6405	91	-3.973	-4.060	-1.006	-	-	-	-3.765	-4.004	-0.872	-2.45	-4.02	-0.19	-1.062	-1
UNII6	6445	99	-3.316	-3.170	-0.232	-	-	-	-3.160	-3.430	-0.282	-3.96	-5.08	-1.49	-1.722	-1
	6485	107	-3.588	-3.010	-0.279	-	-	-	-3.440	-3.409	-0.414	-3.96	-5.08	-1.49	-1.769	-1
	6525	115	-2.694	-2.705	0.311	-	-	-	-2.775	-2.916	0.166	-3.96	-5.08	-1.49	-1.179	-1
UNII7	6565	123	-2.712	-2.722	0.294	-	-	-	-3.044	-2.897	0.041	-3.96	-5.08	-1.49	-1.196	-1
	6685	147	-2.568	-3.041	0.212	-	-	-	-2.753	-2.833	0.218	-3.96	-5.08	-1.49	-1.272	-1
	6845	179	-2.450	-3.020	0.285	-	-	-	-2.534	-3.043	0.229	-3.96	-5.08	-1.49	-1.205	-1
UNII8	6885	187	-2.073	-2.963	0.515	-	-	-	-2.234	-2.755	0.524	-3.99	-5.26	-1.59	-1.066	-1
	7005	211	-2.686	-2.581	0.377	-	-	-	-3.003	-2.545	0.243	-3.99	-5.26	-1.59	-1.213	-1
	7085	227	-3.897	-2.754	-0.277	-	-	-	-4.288	-2.738	-0.434	-3.99	-5.26	-1.59	-1.867	-1

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-	-	-	-3.164	-5.974	-1.335	-	-	-	-2.45	-4.02	-0.19	-1.525	-1
	6165	43	-	-	-	-3.935	-4.263	-1.086	-	-	-	-2.45	-4.02	-0.19	-1.276	-1
	6405	91	-	-	-	-4.004	-4.021	-1.002	-	-	-	-2.45	-4.02	-0.19	-1.192	-1
UNII6	6445	99	-	-	-	-2.635	-2.600	0.393	-	-	-	-3.96	-5.08	-1.49	-1.097	-1
	6485	107	-	-	-	-2.793	-2.569	0.331	-	-	-	-3.96	-5.08	-1.49	-1.159	-1
	6525	115	-	-	-	-2.823	-2.524	0.339	-	-	-	-3.96	-5.08	-1.49	-1.151	-1
UNII7	6565	123	-	-	-	-3.394	-3.600	-0.485	-	-	-	-3.96	-5.08	-1.49	-1.975	-1
	6685	147	-	-	-	-2.553	-3.244	0.126	-	-	-	-3.96	-5.08	-1.49	-1.364	-1
	6845	179	-	-	-	-2.286	-3.239	0.274	-	-	-	-3.96	-5.08	-1.49	-1.216	-1
UNII8	6885	187	-	-	-	-2.050	-3.098	0.468	-	-	-	-3.99	-5.26	-1.59	-1.122	-1
	7005	211	-	-	-	-2.793	-2.386	0.426	-	-	-	-3.99	-5.26	-1.59	-1.164	-1
	7085	227	-	-	-	-3.827	-2.692	-0.212	-	-	-	-3.99	-5.26	-1.59	-1.802	-1

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-3.567	-6.562	-1.801	-	-	-	-2.45	-4.02	-0.19	-1.991	-1
	6165	43	-	-	-	-3.318	-5.120	-1.116	-	-	-	-2.45	-4.02	-0.19	-1.306	-1
	6405	91	-	-	-	-4.329	-4.339	-1.324	-	-	-	-2.45	-4.02	-0.19	-1.514	-1
UNII6	6445	99	-	-	-	-2.963	-3.234	-0.086	-	-	-	-3.96	-5.08	-1.49	-1.576	-1
	6485	107	-	-	-	-3.219	-3.105	-0.151	-	-	-	-3.96	-5.08	-1.49	-1.641	-1
	6525	115	-	-	-	-3.241	-2.758	0.018	-	-	-	-3.96	-5.08	-1.49	-1.472	-1
UNII7	6565	123	-	-	-	-3.439	-3.433	-0.426	-	-	-	-3.96	-5.08	-1.49	-1.916	-1
	6685	147	-	-	-	-2.474	-2.956	0.302	-	-	-	-3.96	-5.08	-1.49	-1.188	-1
	6845	179	-	-	-	-2.447	-3.197	0.205	-	-	-	-3.96	-5.08	-1.49	-1.285	-1
UNII8	6885	187	-	-	-	-2.423	-3.286	0.177	-	-	-	-3.99	-5.26	-1.59	-1.413	-1
	7005	211	-	-	-	-3.297	-2.892	-0.079	-	-	-	-3.99	-5.26	-1.59	-1.669	-1
	7085	227	-	-	-	-3.763	-2.547	-0.102	-	-	-	-3.99	-5.26	-1.59	-1.692	-1

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-4.400	-6.011	-2.121	-4.747	-5.681	-2.178	-4.293	-5.922	-2.021	-2.45	-4.02	-0.19	-2.211	-1
	6145	39	-3.216	-5.398	-1.161	-3.213	-5.559	-1.219	-3.000	-5.466	-1.050	-2.45	-4.02	-0.19	-1.240	-1
	6385	87	-3.705	-5.093	-1.333	-4.131	-5.357	-1.690	-3.832	-5.078	-1.400	-2.45	-4.02	-0.19	-1.523	-1
UNII6	6465	103	-3.921	-5.123	-1.470	-4.011	-5.690	-1.759	-3.166	-5.881	-1.304	-3.96	-5.08	-1.49	-2.794	-1
	6545	119	-4.130	-4.779	-1.432	-4.403	-5.536	-1.922	-4.272	-5.717	-1.924	-3.96	-5.08	-1.49	-2.922	-1
UNII7	6625	135	-4.344	-4.424	-1.373	-4.309	-5.158	-1.702	-3.853	-5.087	-1.416	-3.96	-5.08	-1.49	-2.863	-1
	6705	151	-3.731	-4.782	-1.214	-3.845	-5.425	-1.553	-3.033	-5.579	-1.111	-3.96	-5.08	-1.49	-2.601	-1
	6785	167	-3.529	-4.105	-0.797	-3.502	-4.970	-1.164	-3.315	-5.369	-1.211	-3.96	-5.08	-1.49	-2.287	-1
UNII8	6865	183	-3.970	-6.341	-1.985	-4.269	-6.558	-2.254	-4.562	-6.134	-2.267	-3.99	-5.26	-1.59	-3.575	-1
	6945	199	-3.712	-5.122	-1.349	-3.875	-5.282	-1.511	-4.139	-5.332	-1.684	-3.99	-5.26	-1.59	-2.939	-1
	7025	215	-3.792	-4.376	-1.064	-4.093	-4.411	-1.238	-4.982	-4.990	-1.975	-3.99	-5.26	-1.59	-2.654	-1

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-3.654	-5.474	-1.459	-3.860	-4.927	-1.350	-3.808	-4.749	-1.242	-2.45	-4.02	-0.19	-1.432	-1
	6145	39	-4.531	-4.213	-1.358	-4.474	-4.863	-1.653	-4.410	-4.557	-1.472	-2.45	-4.02	-0.19	-1.548	-1
	6385	87	-4.658	-4.477	-1.556	-5.177	-4.335	-1.725	-4.923	-4.113	-1.488	-2.45	-4.02	-0.19	-1.678	-1
UNII6	6465	103	-4.693	-4.192	-1.425	-4.454	-4.262	-1.346	-4.739	-4.439	-1.576	-3.96	-5.08	-1.49	-2.836	-1
	6545	119	-4.552	-4.432	-1.481	-4.689	-4.681	-1.674	-5.039	-4.859	-1.937	-3.96	-5.08	-1.49	-2.971	-1
UNII7	6625	135	-4.155	-4.742	-1.428	-4.312	-4.686	-1.484	-4.306	-4.491	-1.387	-3.96	-5.08	-1.49	-2.877	-1
	6705	151	-3.765	-4.177	-0.955	-4.078	-4.318	-1.186	-3.978	-4.575	-1.256	-3.96	-5.08	-1.49	-2.445	-1
	6785	167	-3.660	-3.975	-0.804	-4.096	-4.244	-1.159	-4.347	-4.188	-1.256	-3.96	-5.08	-1.49	-2.294	-1
UNII8	6865	183	-3.712	-5.154	-1.363	-4.115	-5.223	-1.623	-4.055	-4.914	-1.453	-3.99	-5.26	-1.59	-2.953	-1
	6945	199	-3.814	-5.236	-1.456	-4.555	-5.115	-1.815	-4.850	-4.700	-1.764	-3.99	-5.26	-1.59	-3.046	-1
	7025	215	-4.502	-3.823	-1.139	-5.108	-4.312	-1.681	-5.151	-4.471	-1.787	-3.99	-5.26	-1.59	-2.729	-1

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-3.735	-6.839	-2.005	-3.617	-6.733	-1.891	-3.415	-6.990	-1.834	-2.45	-4.02	-0.19	-2.024	-1
	6145	39	-3.390	-5.816	-1.425	-3.411	-5.873	-1.459	-3.478	-5.814	-1.480	-2.45	-4.02	-0.19	-1.615	-1
	6385	87	-4.366	-4.574	-1.458	-4.538	-4.389	-1.452	-4.347	-4.367	-1.346	-2.45	-4.02	-0.19	-1.536	-1
UNII6	6465	103	-3.383	-3.421	-0.391	-3.209	-3.276	-0.232	-3.245	-3.391	-0.307	-3.96	-5.08	-1.49	-1.722	-1
	6545	119	-3.256	-3.266	-0.250	-3.323	-3.680	-0.487	-3.475	-3.687	-0.569	-3.96	-5.08	-1.49	-1.740	-1
UNII7	6625	135	-3.038	-3.768	-0.377	-3.070	-3.821	-0.419	-3.000	-3.331	-0.152	-3.96	-5.08	-1.49	-1.642	-1
	6705	151	-2.667	-3.381	0.001	-2.789	-3.513	-0.125	-2.733	-3.748	-0.200	-3.96	-5.08	-1.49	-1.489	-1
	6785	167	-2.717	-3.433	-0.050	-2.913	-3.347	-0.114	-2.877	-3.606	-0.216	-3.96	-5.08	-1.49	-1.540	-1
UNII8	6865	183	-2.490	-3.766	-0.071	-2.888	-3.985	-0.391	-2.775	-3.725	-0.214	-3.99	-5.26	-1.59	-1.661	-1
	6945	199	-3.022	-3.757	-0.363	-3.462	-3.925	-0.677	-3.518	-3.674	-0.585	-3.99	-5.26	-1.59	-1.953	-1
	7025	215	-3.500	-2.838	-0.146	-3.985	-3.123	-0.522	-4.132	-2.938	-0.484	-3.99	-5.26	-1.59	-1.736	-1

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-3.458	-6.371	-1.664	-3.404	-6.253	-1.589	-2.953	-5.992	-1.201	-2.45	-4.02	-0.19	-1.391	-1
	6145	39	-3.671	-5.280	-1.391	-3.579	-5.491	-1.420	-3.874	-5.412	-1.565	-2.45	-4.02	-0.19	-1.581	-1
	6385	87	-4.608	-4.675	-1.631	-4.613	-4.539	-1.565	-4.529	-4.674	-1.590	-2.45	-4.02	-0.19	-1.755	-1
UNII6	6465	103	-3.456	-3.278	-0.356	-3.383	-3.186	-0.273	-3.256	-3.409	-0.321	-3.96	-5.08	-1.49	-1.763	-1
	6545	119	-3.308	-3.232	-0.259	-3.370	-3.031	-0.187	-3.470	-3.596	-0.522	-3.96	-5.08	-1.49	-1.677	-1
UNII7	6625	135	-3.175	-3.479	-0.314	-3.105	-3.494	-0.285	-3.118	-3.408	-0.250	-3.96	-5.08	-1.49	-1.740	-1
	6705	151	-2.641	-2.929	0.228	-2.650	-2.721	0.325	-2.620	-2.613	0.394	-3.96	-5.08	-1.49	-1.096	-1
	6785	167	-2.744	-2.779	0.249	-2.468	-2.902	0.331	-2.933	-3.031	0.029	-3.96	-5.08	-1.49	-1.159	-1
UNII8	6865	183	-2.725	-4.077	-0.338	-3.088	-4.152	-0.577	-3.040	-4.016	-0.490	-3.99	-5.26	-1.59	-1.928	-1
	6945	199	-2.524	-2.877	0.314	-2.536	-3.069	0.216	-2.856	-2.845	0.160	-3.99	-5.26	-1.59	-1.276	-1
	7025	215	-2.734	-2.215	0.544	-2.983	-2.422	0.317	-3.418	-2.403	0.130	-3.99	-5.26	-1.59	-1.046	-1

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-3.454	-6.319	-1.644	-	-	-	-3.197	-5.940	-1.345	-2.45	-4.02	-0.19	-1.535	-1
	6145	39	-3.839	-5.497	-1.579	-	-	-	-3.765	-5.393	-1.492	-2.45	-4.02	-0.19	-1.682	-1
	6385	87	-4.440	-4.010	-1.209	-	-	-	-4.334	-4.177	-1.244	-2.45	-4.02	-0.19	-1.399	-1
UNII6	6465	103	-2.713	-2.546	0.382	-	-	-	-2.643	-2.452	0.464	-3.96	-5.08	-1.49	-1.026	-1
	6545	119	-3.365	-3.226	-0.284	-	-	-	-3.497	-3.344	-0.409	-3.96	-5.08	-1.49	-1.774	-1
UNII7	6625	135	-3.263	-3.320	-0.281	-	-	-	-3.111	-3.265	-0.177	-3.96	-5.08	-1.49	-1.667	-1
	6705	151	-2.446	-3.087	0.256	-	-	-	-2.872	-3.264	-0.053	-3.96	-5.08	-1.49	-1.234	-1
	6785	167	-2.585	-3.054	0.198	-	-	-	-2.663	-3.012	0.177	-3.96	-5.08	-1.49	-1.292	-1
UNII8	6865	183	-2.123	-3.241	0.365	-	-	-	-2.510	-3.162	0.187	-3.99	-5.26	-1.59	-1.225	-1
	6945	199	-2.318	-2.953	0.387	-	-	-	-2.852	-2.688	0.241	-3.99	-5.26	-1.59	-1.203	-1
	7025	215	-2.682	-2.359	0.493	-	-	-	-3.112	-2.582	0.172	-3.99	-5.26	-1.59	-1.097	-1

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-3.626	-6.301	-1.750	-	-	-	-2.45	-4.02	-0.19	-1.940	-1
	6145	39	-	-	-	-3.536	-5.184	-1.272	-	-	-	-2.45	-4.02	-0.19	-1.462	-1
	6385	87	-	-	-	-4.558	-4.526	-1.531	-	-	-	-2.45	-4.02	-0.19	-1.721	-1
UNII6	6465	103	-	-	-	-3.748	-3.457	-0.589	-	-	-	-3.96	-5.08	-1.49	-2.079	-1
	6545	119	-	-	-	-4.055	-3.703	-0.865	-	-	-	-3.96	-5.08	-1.49	-2.355	-1
UNII7	6625	135	-	-	-	-3.599	-3.834	-0.704	-	-	-	-3.96	-5.08	-1.49	-2.194	-1
	6705	151	-	-	-	-3.145	-3.665	-0.386	-	-	-	-3.96	-5.08	-1.49	-1.876	-1
	6785	167	-	-	-	-3.158	-3.594	-0.360	-	-	-	-3.96	-5.08	-1.49	-1.850	-1
UNII8	6865	183	-	-	-	-2.927	-4.018	-0.428	-	-	-	-3.99	-5.26	-1.59	-2.018	-1
	6945	199	-	-	-	-3.578	-3.900	-0.725	-	-	-	-3.99	-5.26	-1.59	-2.315	-1
	7025	215	-	-	-	-3.801	-3.482	-0.628	-	-	-	-3.99	-5.26	-1.59	-2.218	-1

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-4.506	-7.121	-2.609	-	-	-	-2.45	-4.02	-0.19	-2.799	-1
	6145	39	-	-	-	-4.153	-6.089	-2.004	-	-	-	-2.45	-4.02	-0.19	-2.194	-1
	6385	87	-	-	-	-5.422	-5.363	-2.382	-	-	-	-2.45	-4.02	-0.19	-2.572	-1
UNII6	6465	103	-	-	-	-4.084	-3.861	-0.961	-	-	-	-3.96	-5.08	-1.49	-2.451	-1
	6545	119	-	-	-	-4.362	-4.119	-1.228	-	-	-	-3.96	-5.08	-1.49	-2.718	-1
UNII7	6625	135	-	-	-	-3.768	-4.228	-0.982	-	-	-	-3.96	-5.08	-1.49	-2.472	-1
	6705	151	-	-	-	-3.332	-3.918	-0.605	-	-	-	-3.96	-5.08	-1.49	-2.095	-1
	6785	167	-	-	-	-3.386	-3.912	-0.631	-	-	-	-3.96	-5.08	-1.49	-2.121	-1
UNII8	6865	183	-	-	-	-3.152	-4.512	-0.769	-	-	-	-3.99	-5.26	-1.59	-2.359	-1
	6945	199	-	-	-	-3.757	-4.152	-0.940	-	-	-	-3.99	-5.26	-1.59	-2.530	-1
	7025	215	-	-	-	-4.225	-3.822	-1.008	-	-	-	-3.99	-5.26	-1.59	-2.598	-1

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.038	-7.452	-3.069	-4.348	-6.536	-2.295	-4.472	-6.279	-2.272	-2.45	-4.02	-0.19	-2.462	-1
	6185	47	-5.017	-9.223	-3.619	-4.366	-9.069	-3.099	-3.996	-8.108	-2.572	-2.45	-4.02	-0.19	-2.762	-1
	6345	79	-4.304	-7.267	-2.527	-4.214	-6.954	-2.361	-4.603	-6.478	-2.429	-2.45	-4.02	-0.19	-2.551	-1
UNII6	6505	111	-5.594	-5.503	-2.538	-5.502	-5.405	-2.443	-5.354	-6.118	-2.709	-3.96	-5.08	-1.49	-3.933	-1
UNII7	6665	143	-5.783	-6.077	-2.917	-4.924	-5.562	-2.221	-4.539	-5.391	-1.933	-3.96	-5.08	-1.49	-3.423	-1
UNII8	6825	175	-5.109	-6.467	-2.724	-4.705	-6.113	-2.341	-3.981	-6.003	-1.865	-3.99	-5.26	-1.59	-3.455	-1
	6985	207	-4.064	-6.222	-2.000	-4.708	-5.993	-2.292	-5.146	-6.066	-2.571	-3.99	-5.26	-1.59	-3.590	-1

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-5.568	-5.051	-2.291	-5.179	-4.891	-2.022	-5.311	-4.821	-2.049	-2.45	-4.02	-0.19	-2.212	-1
	6185	47	-5.062	-5.614	-2.319	-4.648	-5.302	-1.952	-4.631	-5.286	-1.936	-2.45	-4.02	-0.19	-2.126	-1
	6345	79	-5.999	-5.622	-2.796	-5.972	-5.676	-2.811	-6.406	-5.726	-3.042	-2.45	-4.02	-0.19	-2.986	-1
UNII6	6505	111	-5.632	-5.519	-2.565	-5.750	-5.256	-2.486	-6.403	-6.186	-3.283	-3.96	-5.08	-1.49	-3.976	-1
UNII7	6665	143	-5.425	-5.353	-2.378	-5.294	-5.232	-2.252	-5.090	-5.420	-2.241	-3.96	-5.08	-1.49	-3.731	-1
UNII8	6825	175	-4.689	-5.382	-2.011	-5.202	-5.471	-2.324	-5.115	-4.828	-1.959	-3.99	-5.26	-1.59	-3.549	-1
	6985	207	-4.826	-5.701	-2.231	-4.898	-5.734	-2.286	-5.671	-5.122	-2.377	-3.99	-5.26	-1.59	-3.821	-1

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.491	-5.960	-2.153	-4.055	-5.499	-1.707	-3.803	-5.684	-1.632	-2.45	-4.02	-0.19	-1.822	-1
	6185	47	-4.063	-6.372	-2.055	-3.985	-6.323	-1.988	-3.728	-5.837	-1.645	-2.45	-4.02	-0.19	-1.835	-1
	6345	79	-3.920	-4.690	-1.277	-4.452	-4.691	-1.559	-4.395	-4.743	-1.555	-2.45	-4.02	-0.19	-1.467	-1
UNII6	6505	111	-4.081	-4.082	-1.071	-4.391	-4.650	-1.508	-4.856	-4.957	-1.896	-3.96	-5.08	-1.49	-2.561	-1
UNII7	6665	143	-3.624	-4.376	-0.973	-3.694	-4.302	-0.977	-3.527	-3.761	-0.632	-3.96	-5.08	-1.49	-2.122	-1
UNII8	6825	175	-3.610	-4.496	-1.020	-3.978	-4.586	-1.261	-3.616	-4.309	-0.938	-3.99	-5.26	-1.59	-2.528	-1
	6985	207	-3.374	-3.773	-0.558	-4.085	-4.036	-1.050	-4.442	-3.869	-1.136	-3.99	-5.26	-1.59	-2.148	-1

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.670	-5.459	-1.463	-3.918	-5.588	-1.663	-3.869	-5.472	-1.587	-2.45	-4.02	-0.19	-1.653	-1
	6185	47	-3.843	-5.948	-1.759	-3.620	-5.766	-1.551	-3.354	-5.113	-1.135	-2.45	-4.02	-0.19	-1.325	-1
	6345	79	-3.827	-4.493	-1.137	-4.301	-4.702	-1.486	-4.342	-4.716	-1.515	-2.45	-4.02	-0.19	-1.327	-1
UNII6	6505	111	-3.160	-3.211	-0.175	-3.483	-3.162	-0.309	-4.033	-3.620	-0.811	-3.96	-5.08	-1.49	-1.665	-1
UNII7	6665	143	-3.257	-3.151	-0.193	-3.157	-3.329	-0.232	-3.012	-3.133	-0.062	-3.96	-5.08	-1.49	-1.552	-1
UNII8	6825	175	-3.063	-3.364	-0.200	-3.172	-3.722	-0.428	-3.061	-3.514	-0.271	-3.99	-5.26	-1.59	-1.790	-1
	6985	207	-2.862	-3.367	-0.097	-3.267	-3.570	-0.405	-3.701	-3.717	-0.699	-3.99	-5.26	-1.59	-1.687	-1

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.098	-5.559	-1.757	-	-	-	-4.120	-5.470	-1.732	-2.45	-4.02	-0.19	-1.922	-1
	6185	47	-3.810	-5.681	-1.635	-	-	-	-3.665	-5.559	-1.499	-2.45	-4.02	-0.19	-1.689	-1
	6345	79	-4.828	-4.767	-1.787	-	-	-	-5.196	-4.969	-2.070	-2.45	-4.02	-0.19	-1.977	-1
UNII6	6505	111	-3.607	-3.395	-0.489	-	-	-	-3.760	-3.706	-0.722	-3.96	-5.08	-1.49	-1.979	-1
UNII7	6665	143	-3.065	-3.298	-0.169	-	-	-	-2.991	-3.182	-0.075	-3.96	-5.08	-1.49	-1.565	-1
UNII8	6825	175	-2.945	-3.682	-0.287	-	-	-	-3.096	-3.600	-0.330	-3.99	-5.26	-1.59	-1.877	-1
	6985	207	-2.890	-3.314	-0.086	-	-	-	-3.341	-3.388	-0.354	-3.99	-5.26	-1.59	-1.676	-1

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-3.930	-3.817	-0.862	-	-	-	-2.45	-4.02	-0.19	-1.052	-1
	6185	47	-	-	-	-3.737	-4.362	-1.028	-	-	-	-2.45	-4.02	-0.19	-1.218	-1
	6345	79	-	-	-	-5.012	-4.608	-1.795	-	-	-	-2.45	-4.02	-0.19	-1.985	-1
UNII6	6505	111	-	-	-	-4.809	-4.476	-1.629	-	-	-	-3.96	-5.08	-1.49	-3.119	-1
UNII7	6665	143	-	-	-	-3.964	-4.176	-1.058	-	-	-	-3.96	-5.08	-1.49	-2.548	-1
UNII8	6825	175	-	-	-	-4.026	-4.764	-1.369	-	-	-	-3.99	-5.26	-1.59	-2.959	-1
	6985	207	-	-	-	-4.083	-4.340	-1.199	-	-	-	-3.99	-5.26	-1.59	-2.789	-1

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.741	-6.645	-2.579	-5.305	-7.199	-3.139	-5.837	-7.591	-3.615	-2.45	-4.02	-0.19	-2.769	-1
	6185	47	-4.282	-8.262	-2.821	-4.315	-8.281	-2.849	-5.241	-8.216	-3.468	-2.45	-4.02	-0.19	-3.011	-1
	6345	79	-4.174	-6.831	-2.292	-3.683	-6.623	-1.898	-4.203	-6.835	-2.312	-2.45	-4.02	-0.19	-2.088	-1
UNII6	6505	111	-5.733	-7.104	-3.354	-5.793	-7.296	-3.469	-5.395	-7.414	-3.278	-3.96	-5.08	-1.49	-4.768	-1
UNII7	6665	143	-5.077	-5.988	-2.498	-5.213	-6.141	-2.642	-5.720	-7.611	-3.553	-3.96	-5.08	-1.49	-3.988	-1
UNII8	6825	175	-4.056	-6.533	-2.110	-4.547	-6.117	-2.251	-4.981	-6.757	-2.768	-3.99	-5.26	-1.59	-3.700	-1
	6985	207	-5.539	-5.921	-2.715	-6.227	-6.798	-3.492	-7.055	-6.850	-3.941	-3.99	-5.26	-1.59	-4.305	-1

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-5.336	-4.962	-2.135	-5.712	-5.350	-2.517	-5.800	-5.636	-2.707	-2.45	-4.02	-0.19	-2.325	-1
	6185	47	-4.981	-4.764	-1.861	-4.675	-5.113	-1.878	-5.246	-5.550	-2.385	-2.45	-4.02	-0.19	-2.051	-1
	6345	79	-6.137	-5.549	-2.823	-6.221	-5.283	-2.716	-6.140	-4.997	-2.521	-2.45	-4.02	-0.19	-2.711	-1
UNII6	6505	111	-6.390	-5.903	-3.129	-6.399	-6.405	-3.392	-5.978	-6.311	-3.131	-3.96	-5.08	-1.49	-4.619	-1
UNII7	6665	143	-5.340	-5.418	-2.368	-5.207	-5.861	-2.511	-6.105	-6.194	-3.139	-3.96	-5.08	-1.49	-3.858	-1
UNII8	6825	175	-4.872	-5.323	-2.081	-5.001	-4.963	-1.972	-5.513	-5.264	-2.376	-3.99	-5.26	-1.59	-3.562	-1
	6985	207	-5.319	-4.939	-2.114	-5.882	-5.758	-2.809	-6.440	-5.698	-3.043	-3.99	-5.26	-1.59	-3.704	-1

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-4.451	-5.980	-2.138	-4.605	-6.069	-2.265	-4.636	-6.547	-2.477	-2.45	-4.02	-0.19	-2.328	-1
	6185	47	-3.816	-5.430	-1.538	-3.834	-5.547	-1.596	-4.054	-5.820	-1.837	-2.45	-4.02	-0.19	-1.728	-1
	6345	79	-4.784	-4.562	-1.661	-4.479	-4.505	-1.482	-4.211	-4.210	-1.200	-2.45	-4.02	-0.19	-1.390	-1
UNII6	6505	111	-4.774	-5.143	-1.944	-4.753	-5.323	-2.018	-4.863	-4.857	-1.850	-3.96	-5.08	-1.49	-3.340	-1
UNII7	6665	143	-3.136	-4.322	-0.678	-3.854	-4.757	-1.272	-4.408	-5.164	-1.759	-3.96	-5.08	-1.49	-2.168	-1
UNII8	6825	175	-3.841	-4.304	-1.056	-3.942	-4.276	-1.095	-4.264	-4.607	-1.422	-3.99	-5.26	-1.59	-2.646	-1
	6985	207	-4.660	-4.119	-1.371	-5.635	-4.819	-2.197	-5.959	-4.711	-2.280	-3.99	-5.26	-1.59	-2.961	-1

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-3.887	-5.515	-1.615	-3.954	-5.991	-1.844	-4.502	-6.207	-2.261	-2.45	-4.02	-0.19	-1.805	-1
	6185	47	-3.253	-4.831	-0.960	-3.553	-4.415	-0.952	-3.779	-4.708	-1.208	-2.45	-4.02	-0.19	-1.142	-1
	6345	79	-4.808	-4.560	-1.672	-4.557	-4.639	-1.587	-4.227	-4.099	-1.152	-2.45	-4.02	-0.19	-1.342	-1
UNII6	6505	111	-4.211	-4.255	-1.222	-4.515	-4.383	-1.438	-3.944	-3.986	-0.954	-3.96	-5.08	-1.49	-2.444	-1
UNII7	6665	143	-3.286	-3.122	-0.193	-3.318	-3.508	-0.402	-3.824	-4.164	-0.980	-3.96	-5.08	-1.49	-1.683	-1
UNII8	6825	175	-2.828	-3.248	-0.022	-3.091	-3.538	-0.298	-3.499	-3.222	-0.348	-3.99	-5.26	-1.59	-1.612	-1
	6985	207	-4.173	-3.932	-1.040	-4.376	-3.983	-1.165	-5.201	-4.393	-1.768	-3.99	-5.26	-1.59	-2.630	-1

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-4.333	-5.285	-1.772	-	-	-	-4.186	-5.752	-1.888	-2.45	-4.02	-0.19	-1.962	-1
	6185	47	-3.507	-5.142	-1.237	-	-	-	-3.865	-4.896	-1.339	-2.45	-4.02	-0.19	-1.427	-1
	6345	79	-4.642	-4.500	-1.560	-	-	-	-4.224	-4.033	-1.117	-2.45	-4.02	-0.19	-1.307	-1
UNII6	6505	111	-4.273	-4.293	-1.272	-	-	-	-4.288	-4.196	-1.231	-3.96	-5.08	-1.49	-2.721	-1
UNII7	6665	143	-2.906	-3.493	-0.179	-	-	-	-3.391	-3.953	-0.652	-3.96	-5.08	-1.49	-1.669	-1
UNII8	6825	175	-2.792	-3.620	-0.176	-	-	-	-3.154	-3.208	-0.170	-3.99	-5.26	-1.59	-1.760	-1
	6985	207	-4.117	-3.714	-0.900	-	-	-	-4.753	-4.019	-1.360	-3.99	-5.26	-1.59	-2.490	-1

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-4.217	-4.025	-1.109	-	-	-	-2.45	-4.02	-0.19	-1.299	-1
	6185	47	-	-	-	-3.998	-5.497	-1.672	-	-	-	-2.45	-4.02	-0.19	-1.862	-1
	6345	79	-	-	-	-5.089	-4.803	-1.933	-	-	-	-2.45	-4.02	-0.19	-2.123	-1
UNII6	6505	111	-	-	-	-5.393	-5.326	-2.349	-	-	-	-3.96	-5.08	-1.49	-3.839	-1
UNII7	6665	143	-	-	-	-4.155	-4.548	-1.336	-	-	-	-3.96	-5.08	-1.49	-2.826	-1
UNII8	6825	175	-	-	-	-4.116	-4.447	-1.268	-	-	-	-3.99	-5.26	-1.59	-2.858	-1
	6985	207	-	-	-	-5.013	-4.626	-1.804	-	-	-	-3.99	-5.26	-1.59	-3.394	-1

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-8.626	-8.114	-5.352	-	-	-	-2.45	-4.02	-0.19	-5.542	-1
	6185	47	-	-	-	-7.978	-8.632	-5.282	-	-	-	-2.45	-4.02	-0.19	-5.472	-1
	6345	79	-	-	-	-9.576	-9.080	-6.311	-	-	-	-2.45	-4.02	-0.19	-6.501	-1
UNII6	6505	111	-	-	-	-9.142	-8.964	-6.042	-	-	-	-3.96	-5.08	-1.49	-7.532	-1
UNII7	6665	143	-	-	-	-8.598	-8.850	-5.712	-	-	-	-3.96	-5.08	-1.49	-7.202	-1
UNII8	6825	175	-	-	-	-8.366	-9.011	-5.666	-	-	-	-3.99	-5.26	-1.59	-7.256	-1
	6985	207	-	-	-	-8.357	-8.925	-5.621	-	-	-	-3.99	-5.26	-1.59	-7.211	-1

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-7.875	-7.402	-4.622	-	-	-	-2.45	-4.02	-0.19	-4.812	-1
	6185	47	-	-	-	-7.680	-8.153	-4.900	-	-	-	-2.45	-4.02	-0.19	-5.090	-1
	6345	79	-	-	-	-8.886	-8.533	-5.696	-	-	-	-2.45	-4.02	-0.19	-5.886	-1
UNII6	6505	111	-	-	-	-8.833	-8.371	-5.586	-	-	-	-3.96	-5.08	-1.49	-7.076	-1
UNII7	6665	143	-	-	-	-7.981	-8.214	-5.086	-	-	-	-3.96	-5.08	-1.49	-6.576	-1
UNII8	6825	175	-	-	-	-8.057	-8.499	-5.262	-	-	-	-3.99	-5.26	-1.59	-6.852	-1
	6985	207	-	-	-	-7.980	-8.385	-5.168	-	-	-	-3.99	-5.26	-1.59	-6.758	-1

Mode : EHT320(80LL) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.968	-7.856	-3.166	-4.153	-7.010	-2.340	-4.205	-6.755	-2.285	-2.45	-4.02	-0.19	-2.475	-1
	6265	63	-5.270	-8.892	-3.704	-4.408	-7.685	-2.734	-3.717	-7.044	-2.059	-2.45	-4.02	-0.19	-2.249	-1
UNII6	6425	95	-5.980	-7.386	-3.616	-6.110	-6.953	-3.501	-5.110	-6.416	-2.704	-3.96	-5.08	-1.49	-4.194	-1
	6585	127	-6.436	-5.820	-3.107	-6.099	-5.967	-3.022	-5.998	-6.089	-3.033	-3.96	-5.08	-1.49	-4.512	-1
UNII8	6745	159	-5.797	-5.468	-2.619	-5.308	-5.904	-2.585	-4.841	-5.345	-2.075	-3.99	-5.26	-1.59	-3.665	-1
	6905	191	-5.640	-6.794	-3.168	-5.752	-7.104	-3.365	-4.793	-7.052	-2.767	-3.99	-5.26	-1.59	-4.357	-1

Mode : EHT320(80LL) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-5.226	-4.755	-1.974	-5.013	-4.747	-1.867	-4.936	-4.643	-1.776	-2.45	-4.02	-0.19	-1.966	-1
	6265	63	-5.879	-6.050	-2.953	-5.749	-5.440	-2.581	-5.085	-5.223	-2.143	-2.45	-4.02	-0.19	-2.333	-1
UNII6	6425	95	-5.527	-5.592	-2.549	-5.893	-5.624	-2.746	-5.906	-5.520	-2.698	-3.96	-5.08	-1.49	-4.039	-1
	6585	127	-5.812	-4.761	-2.244	-5.398	-5.326	-2.351	-5.764	-5.015	-2.363	-3.96	-5.08	-1.49	-3.734	-1
UNII8	6745	159	-5.385	-4.919	-2.135	-4.858	-4.725	-1.780	-4.948	-5.010	-1.968	-3.99	-5.26	-1.59	-3.370	-1
	6905	191	-4.663	-6.039	-2.286	-4.832	-6.048	-2.387	-4.756	-5.855	-2.260	-3.99	-5.26	-1.59	-3.850	-1

Mode : EHT320(80LL) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.365	-6.704	-2.369	-3.914	-6.514	-2.012	-4.022	-6.305	-2.005	-2.45	-4.02	-0.19	-2.195	-1
	6265	63	-5.007	-6.100	-2.509	-4.633	-5.784	-2.160	-4.429	-5.506	-1.924	-2.45	-4.02	-0.19	-2.114	-1
UNII6	6425	95	-3.875	-4.442	-1.139	-4.377	-4.448	-1.402	-4.064	-4.570	-1.299	-3.96	-5.08	-1.49	-2.629	-1
	6585	127	-3.933	-4.114	-1.012	-4.193	-4.134	-1.153	-4.583	-4.436	-1.499	-3.96	-5.08	-1.49	-2.502	-1
UNII8	6745	159	-3.767	-4.365	-1.045	-3.292	-4.092	-0.663	-3.280	-3.800	-0.522	-3.99	-5.26	-1.59	-2.112	-1
	6905	191	-3.484	-4.599	-0.995	-3.402	-4.922	-1.085	-3.281	-4.509	-0.841	-3.99	-5.26	-1.59	-2.431	-1

Mode : EHT320(80LL) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.685	-5.725	-1.576	-3.304	-5.638	-1.306	-3.318	-5.327	-1.197	-2.45	-4.02	-0.19	-1.387	-1
	6265	63	-3.969	-5.980	-1.849	-3.792	-5.524	-1.562	-3.572	-5.137	-1.274	-2.45	-4.02	-0.19	-1.464	-1
UNII6	6425	95	-3.088	-3.346	-0.205	-3.353	-3.425	-0.379	-3.543	-3.423	-0.473	-3.96	-5.08	-1.49	-1.695	-1
	6585	127	-3.601	-2.922	-0.238	-3.362	-2.933	-0.132	-3.616	-3.214	-0.400	-3.96	-5.08	-1.49	-1.622	-1
UNII8	6745	159	-3.139	-2.868	0.009	-3.042	-2.998	-0.010	-2.804	-2.899	0.159	-3.99	-5.26	-1.59	-1.431	-1
	6905	191	-2.510	-3.593	-0.008	-2.703	-3.387	-0.022	-2.659	-3.717	-0.146	-3.99	-5.26	-1.59	-1.598	-1

Mode : EHT320(80LL) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.809	-5.969	-1.746	-	-	-	-3.938	-5.603	-1.681	-2.45	-4.02	-0.19	-1.871	-1
	6265	63	-3.604	-5.494	-1.437	-	-	-	-3.689	-4.881	-1.234	-2.45	-4.02	-0.19	-1.424	-1
UNII6	6425	95	-3.320	-3.326	-0.313	-	-	-	-3.526	-3.549	-0.528	-3.96	-5.08	-1.49	-1.803	-1
	6585	127	-3.356	-2.947	-0.137	-	-	-	-3.468	-3.360	-0.404	-3.96	-5.08	-1.49	-1.627	-1
UNII8	6745	159	-2.909	-2.930	0.090	-	-	-	-2.879	-2.867	0.137	-3.99	-5.26	-1.59	-1.453	-1
	6905	191	-2.263	-3.473	0.184	-	-	-	-2.254	-3.360	0.238	-3.99	-5.26	-1.59	-1.352	-1

Mode : EHT320(80LL) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-3.842	-4.092	-0.954	-	-	-	-2.45	-4.02	-0.19	-1.144	-1
	6265	63	-	-	-	-4.107	-4.499	-1.288	-	-	-	-2.45	-4.02	-0.19	-1.478	-1
UNII6	6425	95	-	-	-	-4.329	-4.459	-1.383	-	-	-	-3.96	-5.08	-1.49	-2.873	-1
	6585	127	-	-	-	-4.684	-4.253	-1.452	-	-	-	-3.96	-5.08	-1.49	-2.942	-1
UNII8	6745	159	-	-	-	-3.800	-4.071	-0.923	-	-	-	-3.99	-5.26	-1.59	-2.513	-1
	6905	191	-	-	-	-3.374	-4.672	-0.964	-	-	-	-3.99	-5.26	-1.59	-2.554	-1

Mode : EHT320(80LM) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.869	-9.808	-3.661	-4.559	-8.997	-3.224	-4.876	-8.158	-3.204	-2.45	-4.02	-0.19	-3.394	-1
	6265	63	-5.809	-9.872	-4.371	-5.125	-8.729	-3.553	-4.753	-7.582	-2.931	-2.45	-4.02	-0.19	-3.121	-1
UNII6	6425	95	-6.260	-7.724	-3.920	-5.406	-6.898	-3.078	-3.865	-6.153	-1.850	-3.96	-5.08	-1.49	-3.340	-1
	6585	127	-6.743	-7.163	-3.938	-5.067	-5.964	-2.482	-3.779	-5.086	-1.373	-3.96	-5.08	-1.49	-2.863	-1
UNII8	6745	159	-5.546	-6.352	-2.920	-4.816	-6.565	-2.593	-4.207	-6.150	-2.060	-3.99	-5.26	-1.59	-3.650	-1
	6905	191	-4.823	-7.847	-3.067	-4.492	-5.915	-2.135	-4.193	-5.869	-1.940	-3.99	-5.26	-1.59	-3.530	-1

Mode : EHT320(80LM) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-5.136	-5.039	-2.077	-5.598	-5.222	-2.395	-5.084	-5.877	-2.452	-2.45	-4.02	-0.19	-2.267	-1
	6265	63	-5.221	-5.476	-2.336	-5.725	-5.392	-2.545	-5.313	-5.471	-2.381	-2.45	-4.02	-0.19	-2.526	-1
UNII6	6425	95	-6.034	-5.367	-2.677	-5.612	-5.425	-2.507	-5.281	-5.101	-2.180	-3.96	-5.08	-1.49	-3.670	-1
	6585	127	-6.211	-6.131	-3.160	-6.122	-5.944	-3.022	-5.746	-5.458	-2.589	-3.96	-5.08	-1.49	-4.079	-1
UNII8	6745	159	-4.585	-4.488	-1.526	-5.156	-5.042	-2.088	-5.479	-5.288	-2.372	-3.99	-5.26	-1.59	-3.116	-1
	6905	191	-4.337	-6.623	-2.321	-4.993	-5.949	-2.434	-4.639	-5.563	-2.066	-3.99	-5.26	-1.59	-3.656	-1

Mode : EHT320(80LM) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.490	-5.387	-1.905	-4.740	-5.694	-2.180	-4.613	-5.893	-2.196	-2.45	-4.02	-0.19	-2.095	-1
	6265	63	-3.870	-4.171	-1.008	-3.872	-4.439	-1.136	-3.867	-4.206	-1.023	-2.45	-4.02	-0.19	-1.198	-1
UNII6	6425	95	-4.466	-4.618	-1.531	-4.597	-4.566	-1.571	-4.026	-4.294	-1.148	-3.96	-5.08	-1.49	-2.638	-1
	6585	127	-4.731	-4.372	-1.537	-4.510	-4.919	-1.699	-4.130	-4.723	-1.406	-3.96	-5.08	-1.49	-2.896	-1
UNII8	6745	159	-3.246	-3.637	-0.427	-3.789	-3.870	-0.819	-3.722	-4.215	-0.951	-3.99	-5.26	-1.59	-2.017	-1
	6905	191	-3.188	-4.911	-0.954	-3.472	-4.172	-0.798	-3.135	-4.210	-0.629	-3.99	-5.26	-1.59	-2.219	-1

Mode : EHT320(80LM) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.317	-5.323	-1.195	-3.734	-5.321	-1.445	-4.014	-5.526	-1.695	-2.45	-4.02	-0.19	-1.385	-1
	6265	63	-3.892	-5.517	-1.619	-3.824	-5.340	-1.506	-4.403	-5.162	-1.756	-2.45	-4.02	-0.19	-1.696	-1
UNII6	6425	95	-3.578	-3.512	-0.535	-3.708	-3.427	-0.555	-3.044	-3.133	-0.078	-3.96	-5.08	-1.49	-1.568	-1
	6585	127	-3.586	-3.526	-0.546	-3.922	-3.737	-0.819	-3.767	-3.594	-0.670	-3.96	-5.08	-1.49	-2.036	-1
UNII8	6745	159	-2.878	-2.442	0.355	-2.990	-2.900	0.065	-2.982	-3.348	-0.151	-3.99	-5.26	-1.59	-1.235	-1
	6905	191	-2.372	-3.477	0.121	-2.406	-3.518	0.084	-2.768	-3.071	0.093	-3.99	-5.26	-1.59	-1.469	-1

Mode : EHT320(80LM) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.692	-5.712	-1.576	-	-	-	-3.966	-5.958	-1.839	-2.45	-4.02	-0.19	-1.766	-1
	6265	63	-3.584	-5.012	-1.230	-	-	-	-3.879	-4.835	-1.321	-2.45	-4.02	-0.19	-1.420	-1
UNII6	6425	95	-3.500	-3.335	-0.407	-	-	-	-2.928	-3.269	-0.085	-3.96	-5.08	-1.49	-1.575	-1
	6585	127	-3.976	-3.685	-0.818	-	-	-	-3.493	-3.672	-0.572	-3.96	-5.08	-1.49	-2.062	-1
UNII8	6745	159	-2.746	-2.810	0.232	-	-	-	-3.057	-3.106	-0.071	-3.99	-5.26	-1.59	-1.358	-1
	6905	191	-2.553	-3.168	0.160	-	-	-	-2.611	-3.184	0.122	-3.99	-5.26	-1.59	-1.430	-1

Mode : EHT320(80LM) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-4.757	-5.427	-2.068	-	-	-	-2.45	-4.02	-0.19	-2.258	-1
	6265	63	-	-	-	-4.042	-3.935	-0.977	-	-	-	-2.45	-4.02	-0.19	-1.167	-1
UNII6	6425	95	-	-	-	-3.986	-3.907	-0.936	-	-	-	-3.96	-5.08	-1.49	-2.426	-1
	6585	127	-	-	-	-4.357	-4.045	-1.187	-	-	-	-3.96	-5.08	-1.49	-2.677	-1
UNII8	6745	159	-	-	-	-3.978	-4.127	-1.041	-	-	-	-3.99	-5.26	-1.59	-2.631	-1
	6905	191	-	-	-	-3.337	-3.756	-0.531	-	-	-	-3.99	-5.26	-1.59	-2.121	-1

Mode : EHT320(80MH) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.389	-8.794	-3.045	-5.165	-8.861	-3.621	-5.692	-8.935	-4.007	-2.45	-4.02	-0.19	-3.235	-1
	6265	63	-4.251	-7.724	-2.639	-5.301	-8.788	-3.693	-6.686	-9.258	-4.774	-2.45	-4.02	-0.19	-2.829	-1
UNII6	6425	95	-4.533	-5.601	-2.024	-4.536	-7.081	-2.614	-5.646	-8.870	-3.955	-3.96	-5.08	-1.49	-3.514	-1
	6585	127	-3.616	-5.223	-1.335	-4.475	-6.760	-2.459	-4.994	-7.615	-3.099	-3.96	-5.08	-1.49	-2.825	-1
UNII8	6745	159	-4.385	-5.483	-1.889	-5.432	-6.765	-3.037	-5.851	-8.167	-3.846	-3.99	-5.26	-1.59	-3.479	-1
	6905	191	-4.467	-5.260	-1.835	-5.828	-6.616	-3.194	-6.351	-7.621	-3.929	-3.99	-5.26	-1.59	-3.425	-1

Mode : EHT320(80MH) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-5.378	-5.271	-2.314	-5.423	-5.460	-2.431	-5.616	-5.447	-2.520	-2.45	-4.02	-0.19	-2.504	-1
	6265	63	-5.783	-5.674	-2.718	-5.787	-5.319	-2.536	-6.039	-5.934	-2.976	-2.45	-4.02	-0.19	-2.726	-1
UNII6	6425	95	-5.394	-4.677	-2.010	-5.432	-5.317	-2.364	-6.055	-6.093	-3.063	-3.96	-5.08	-1.49	-3.500	-1
	6585	127	-5.748	-5.343	-2.530	-5.273	-5.650	-2.447	-6.081	-5.631	-2.840	-3.96	-5.08	-1.49	-3.937	-1
UNII8	6745	159	-5.214	-5.015	-2.103	-5.236	-4.790	-1.997	-5.321	-5.710	-2.501	-3.99	-5.26	-1.59	-3.587	-1
	6905	191	-4.496	-5.675	-2.035	-5.038	-5.978	-2.472	-6.321	-5.723	-3.001	-3.99	-5.26	-1.59	-3.625	-1

Mode : EHT320(80MH) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.874	-4.578	-1.201	-3.860	-4.200	-1.016	-3.694	-4.545	-1.088	-2.45	-4.02	-0.19	-1.206	-1
	6265	63	-4.130	-4.241	-1.175	-4.278	-4.459	-1.357	-4.680	-4.328	-1.490	-2.45	-4.02	-0.19	-1.365	-1
UNII6	6425	95	-3.763	-4.321	-1.023	-4.401	-4.645	-1.511	-4.742	-4.863	-1.792	-3.96	-5.08	-1.49	-2.513	-1
	6585	127	-4.399	-4.621	-1.498	-4.164	-4.489	-1.313	-3.885	-4.553	-1.196	-3.96	-5.08	-1.49	-2.686	-1
UNII8	6745	159	-4.163	-4.579	-1.356	-4.046	-4.449	-1.232	-4.115	-4.788	-1.428	-3.99	-5.26	-1.59	-2.822	-1
	6905	191	-3.330	-4.232	-0.747	-4.050	-4.429	-1.225	-4.535	-4.531	-1.523	-3.99	-5.26	-1.59	-2.337	-1

Mode : EHT320(80MH) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.985	-5.889	-1.823	-3.860	-5.638	-1.649	-3.537	-5.000	-1.197	-2.45	-4.02	-0.19	-1.387	-1
	6265	63	-3.486	-4.777	-1.074	-4.000	-4.627	-1.292	-4.288	-4.594	-1.428	-2.45	-4.02	-0.19	-1.264	-1
UNII6	6425	95	-3.186	-2.899	-0.030	-3.016	-3.202	-0.098	-3.634	-3.467	-0.540	-3.96	-5.08	-1.49	-1.520	-1
	6585	127	-3.713	-3.205	-0.442	-3.113	-3.371	-0.230	-2.882	-3.380	-0.114	-3.96	-5.08	-1.49	-1.604	-1
UNII8	6745	159	-3.276	-3.366	-0.311	-3.581	-3.430	-0.495	-3.238	-3.290	-0.254	-3.99	-5.26	-1.59	-1.844	-1
	6905	191	-2.811	-2.840	0.185	-3.143	-3.446	-0.282	-3.630	-3.403	-0.505	-3.99	-5.26	-1.59	-1.405	-1

Mode : EHT320(80MH) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.029	-5.714	-1.780	-	-	-	-3.878	-5.436	-1.578	-2.45	-4.02	-0.19	-1.768	-1
	6265	63	-3.930	-4.797	-1.332	-	-	-	-4.314	-4.788	-1.535	-2.45	-4.02	-0.19	-1.522	-1
UNII6	6425	95	-2.971	-3.037	0.006	-	-	-	-3.571	-2.884	-0.204	-3.96	-5.08	-1.49	-1.484	-1
	6585	127	-3.404	-3.508	-0.446	-	-	-	-3.197	-3.399	-0.287	-3.96	-5.08	-1.49	-1.777	-1
UNII8	6745	159	-3.115	-3.397	-0.244	-	-	-	-3.236	-3.040	-0.127	-3.99	-5.26	-1.59	-1.717	-1
	6905	191	-2.282	-3.382	0.213	-	-	-	-3.148	-3.507	-0.314	-3.99	-5.26	-1.59	-1.377	-1

Mode : EHT320(80MH) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-4.087	-4.092	-1.079	-	-	-	-2.45	-4.02	-0.19	-1.269	-1
	6265	63	-	-	-	-4.081	-3.717	-0.884	-	-	-	-2.45	-4.02	-0.19	-1.074	-1
UNII6	6425	95	-	-	-	-4.080	-3.701	-0.876	-	-	-	-3.96	-5.08	-1.49	-2.366	-1
	6585	127	-	-	-	-4.363	-4.149	-1.244	-	-	-	-3.96	-5.08	-1.49	-2.734	-1
UNII8	6745	159	-	-	-	-3.717	-4.405	-1.037	-	-	-	-3.99	-5.26	-1.59	-2.627	-1
	6905	191	-	-	-	-3.703	-4.005	-0.841	-	-	-	-3.99	-5.26	-1.59	-2.431	-1

Mode : EHT320(80HH) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.691	-7.094	-2.718	-4.871	-6.865	-2.744	-5.411	-7.467	-3.308	-2.45	-4.02	-0.19	-2.908	-1
	6265	63	-4.798	-7.250	-2.843	-5.228	-7.447	-3.187	-4.417	-8.008	-2.841	-2.45	-4.02	-0.19	-3.031	-1
UNII6	6425	95	-5.672	-8.262	-3.766	-5.795	-8.615	-3.970	-5.309	-9.071	-3.784	-3.96	-5.08	-1.49	-5.256	-1
	6585	127	-5.089	-7.299	-3.045	-5.816	-8.929	-4.089	-6.224	-9.389	-4.514	-3.96	-5.08	-1.49	-4.535	-1
UNII8	6745	159	-4.501	-6.525	-2.386	-5.473	-6.577	-2.980	-5.919	-7.369	-3.573	-3.99	-5.26	-1.59	-3.976	-1
	6905	191	-5.201	-5.096	-2.138	-5.248	-6.543	-2.837	-6.642	-6.943	-3.780	-3.99	-5.26	-1.59	-3.728	-1

Mode : EHT320(80HH) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-4.970	-5.223	-2.084	-5.224	-5.072	-2.137	-5.804	-5.174	-2.467	-2.45	-4.02	-0.19	-2.274	-1
	6265	63	-5.906	-5.711	-2.797	-6.069	-5.471	-2.749	-5.712	-5.204	-2.440	-2.45	-4.02	-0.19	-2.630	-1
UNII6	6425	95	-6.040	-6.151	-3.085	-5.645	-5.773	-2.698	-5.949	-5.625	-2.773	-3.96	-5.08	-1.49	-4.188	-1
	6585	127	-5.353	-5.220	-2.275	-5.756	-5.831	-2.783	-6.371	-6.262	-3.306	-3.96	-5.08	-1.49	-3.765	-1
UNII8	6745	159	-5.085	-5.338	-2.199	-5.398	-5.078	-2.225	-5.745	-5.124	-2.413	-3.99	-5.26	-1.59	-3.789	-1
	6905	191	-4.752	-4.610	-1.670	-5.156	-5.062	-2.098	-6.267	-5.129	-2.650	-3.99	-5.26	-1.59	-3.260	-1

Mode : EHT320(80HH) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.510	-4.263	-0.860	-4.048	-4.151	-1.089	-4.067	-4.367	-1.204	-2.45	-4.02	-0.19	-1.050	-1
	6265	63	-4.660	-4.680	-1.660	-4.482	-4.354	-1.407	-4.300	-3.801	-1.033	-2.45	-4.02	-0.19	-1.223	-1
UNII6	6425	95	-4.816	-4.977	-1.885	-4.641	-4.933	-1.774	-4.425	-4.536	-1.470	-3.96	-5.08	-1.49	-2.960	-1
	6585	127	-4.103	-4.288	-1.184	-4.584	-4.805	-1.683	-4.784	-5.354	-2.049	-3.96	-5.08	-1.49	-2.674	-1
UNII8	6745	159	-4.076	-4.344	-1.198	-4.391	-4.307	-1.338	-4.466	-4.231	-1.337	-3.99	-5.26	-1.59	-2.788	-1
	6905	191	-4.352	-4.071	-1.199	-5.051	-4.400	-1.703	-5.533	-4.698	-2.085	-3.99	-5.26	-1.59	-2.789	-1

Mode : EHT320(80HH) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.476	-4.737	-1.051	-3.535	-4.552	-1.004	-3.845	-4.526	-1.162	-2.45	-4.02	-0.19	-1.194	-1
	6265	63	-4.341	-4.638	-1.477	-4.565	-4.568	-1.556	-4.148	-4.087	-1.107	-2.45	-4.02	-0.19	-1.297	-1
UNII6	6425	95	-3.799	-3.959	-0.868	-3.982	-4.104	-1.033	-3.624	-3.870	-0.735	-3.96	-5.08	-1.49	-2.225	-1
	6585	127	-3.507	-3.071	-0.274	-3.609	-3.762	-0.675	-3.940	-4.166	-1.042	-3.96	-5.08	-1.49	-1.764	-1
UNII8	6745	159	-3.193	-3.305	-0.239	-3.403	-3.299	-0.341	-3.561	-3.020	-0.272	-3.99	-5.26	-1.59	-1.829	-1
	6905	191	-4.088	-3.644	-0.850	-3.981	-3.790	-0.874	-4.978	-4.187	-1.555	-3.99	-5.26	-1.59	-2.440	-1

Mode : EHT320(80HH) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-3.888	-5.026	-1.410	-	-	-	-4.118	-5.022	-1.537	-2.45	-4.02	-0.19	-1.600	-1
	6265	63	-4.266	-4.373	-1.309	-	-	-	-3.994	-4.116	-1.045	-2.45	-4.02	-0.19	-1.235	-1
UNII6	6425	95	-3.858	-4.249	-1.039	-	-	-	-3.886	-3.701	-0.783	-3.96	-5.08	-1.49	-2.273	-1
	6585	127	-3.148	-3.583	-0.350	-	-	-	-3.739	-3.834	-0.776	-3.96	-5.08	-1.49	-1.840	-1
UNII8	6745	159	-3.242	-3.197	-0.209	-	-	-	-3.403	-3.171	-0.275	-3.99	-5.26	-1.59	-1.799	-1
	6905	191	-3.831	-3.521	-0.663	-	-	-	-4.797	-3.704	-1.206	-3.99	-5.26	-1.59	-2.253	-1

Mode : EHT320(80HH) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-	-	-	-3.997	-4.044	-1.010	-	-	-	-2.45	-4.02	-0.19	-1.200	-1
	6265	63	-	-	-	-4.780	-4.394	-1.572	-	-	-	-2.45	-4.02	-0.19	-1.762	-1
UNII6	6425	95	-	-	-	-4.883	-4.896	-1.879	-	-	-	-3.96	-5.08	-1.49	-3.369	-1
	6585	127	-	-	-	-4.699	-4.504	-1.590	-	-	-	-3.96	-5.08	-1.49	-3.080	-1
UNII8	6745	159	-	-	-	-4.452	-4.357	-1.394	-	-	-	-3.99	-5.26	-1.59	-2.984	-1
	6905	191	-	-	-	-5.187	-4.701	-1.926	-	-	-	-3.99	-5.26	-1.59	-3.516	-1

Mode : EHT320(160L) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-7.363	-7.624	-4.481	-	-	-	-2.45	-4.02	-0.19	-4.671	-1
	6265	63	-	-	-	-7.372	-7.433	-4.392	-	-	-	-2.45	-4.02	-0.19	-4.582	-1
UNII6	6425	95	-	-	-	-7.734	-7.439	-4.574	-	-	-	-3.96	-5.08	-1.49	-6.064	-1
	6585	127	-	-	-	-8.156	-7.516	-4.814	-	-	-	-3.96	-5.08	-1.49	-6.304	-1
UNII8	6745	159	-	-	-	-7.703	-7.217	-4.443	-	-	-	-3.99	-5.26	-1.59	-6.033	-1
	6905	191	-	-	-	-7.060	-7.107	-4.073	-	-	-	-3.99	-5.26	-1.59	-5.663	-1

Mode : EHT320(160U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-7.555	-7.168	-4.347	-	-	-	-2.45	-4.02	-0.19	-4.537	-1
	6265	63	-	-	-	-7.460	-7.139	-4.286	-	-	-	-2.45	-4.02	-0.19	-4.476	-1
UNII6	6425	95	-	-	-	-7.252	-7.131	-4.181	-	-	-	-3.96	-5.08	-1.49	-5.671	-1
	6585	127	-	-	-	-7.202	-7.803	-4.482	-	-	-	-3.96	-5.08	-1.49	-5.972	-1
UNII8	6745	159	-	-	-	-7.431	-7.853	-4.627	-	-	-	-3.99	-5.26	-1.59	-6.217	-1
	6905	191	-	-	-	-6.970	-7.686	-4.303	-	-	-	-3.99	-5.26	-1.59	-5.893	-1

Mode : EHT320 4x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-11.556	-11.641	-8.588	-	-	-	-2.45	-4.02	-0.19	-8.778	-1
	6265	63	-	-	-	-11.239	-11.044	-8.130	-	-	-	-2.45	-4.02	-0.19	-8.320	-1
UNII6	6425	95	-	-	-	-10.997	-11.565	-8.262	-	-	-	-3.96	-5.08	-1.49	-9.752	-1
	6585	127	-	-	-	-12.085	-11.968	-9.016	-	-	-	-3.96	-5.08	-1.49	-10.506	-1
UNII8	6745	159	-	-	-	-11.560	-11.302	-8.419	-	-	-	-3.99	-5.26	-1.59	-10.009	-1
	6905	191	-	-	-	-11.023	-11.658	-8.319	-	-	-	-3.99	-5.26	-1.59	-9.909	-1

Mode : EHT320 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain [dBi]	ANT2 Gain [dBi]	Directional Gain [dBi]	Maximum E.I.R.PSD [dBm/MHz]	Limit [dBm/MHz]
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5	6105	31	-	-	-	-9.846	-9.915	-6.870	-	-	-	-2.45	-4.02	-0.19	-7.060	-1
	6265	63	-	-	-	-9.645	-9.671	-6.648	-	-	-	-2.45	-4.02	-0.19	-6.838	-1
UNII6	6425	95	-	-	-	-9.787	-9.718	-6.742	-	-	-	-3.96	-5.08	-1.49	-8.232	-1
	6585	127	-	-	-	-10.193	-10.066	-7.119	-	-	-	-3.96	-5.08	-1.49	-8.609	-1
UNII8	6745	159	-	-	-	-10.063	-10.127	-7.085	-	-	-	-3.99	-5.26	-1.59	-8.675	-1
	6905	191	-	-	-	-9.599	-9.949	-6.760	-	-	-	-3.99	-5.26	-1.59	-8.350	-1

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-4.401	-5.374	-1.850	-	-	-	-2.45	-4.02	-0.19	-2.040	-1
	6175	45	-	-	-	-3.663	-4.157	-0.892	-	-	-	-2.45	-4.02	-0.19	-1.082	-1
	6415	93	-	-	-	-4.426	-3.959	-1.175	-	-	-	-2.45	-4.02	-0.19	-1.365	-1
UNII6	6435	97	-	-	-	-2.959	-2.637	0.216	-	-	-	-3.96	-5.08	-1.49	-1.274	-1
	6475	105	-	-	-	-3.091	-2.893	0.020	-	-	-	-3.96	-5.08	-1.49	-1.470	-1
	6515	113	-	-	-	-3.067	-2.913	0.021	-	-	-	-3.96	-5.08	-1.49	-1.469	-1
UNII7	6535	117	-	-	-	-3.440	-3.127	-0.270	-	-	-	-3.96	-5.08	-1.49	-1.760	-1
	6695	149	-	-	-	-3.834	-4.081	-0.945	-	-	-	-3.96	-5.08	-1.49	-2.435	-1
	6855	181	-	-	-	-3.797	-4.167	-0.967	-	-	-	-3.96	-5.08	-1.49	-2.457	-1
UNII8	6875	185	-	-	-	-2.472	-3.030	0.269	-	-	-	-3.99	-5.26	-1.59	-1.321	-1
	6995	209	-	-	-	-3.180	-2.639	0.110	-	-	-	-3.99	-5.26	-1.59	-1.480	-1
	7115	233	-	-	-	-4.269	-2.647	-0.372	-	-	-	-3.99	-5.26	-1.59	-1.962	-1

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-5.960	-7.055	-3.463	-6.277	-7.160	-3.686	-5.992	-7.004	-3.458	-2.45	-4.02	-0.19	-3.648	-1
	6175	45	-6.173	-5.977	-3.064	-5.968	-6.195	-3.070	-5.899	-6.272	-3.071	-2.45	-4.02	-0.19	-3.254	-1
	6415	93	-6.580	-6.280	-3.417	-6.648	-6.330	-3.476	-6.605	-6.263	-3.420	-2.45	-4.02	-0.19	-3.607	-1
UNII6	6435	97	-6.342	-5.994	-3.154	-6.312	-6.102	-3.195	-6.003	-5.976	-2.979	-3.96	-5.08	-1.49	-4.469	-1
	6475	105	-6.142	-6.046	-3.083	-6.385	-5.970	-3.162	-6.428	-5.944	-3.169	-3.96	-5.08	-1.49	-4.573	-1
	6515	113	-6.548	-6.096	-3.306	-6.527	-6.497	-3.502	-6.564	-6.258	-3.398	-3.96	-5.08	-1.49	-4.796	-1
UNII7	6535	117	-6.726	-6.455	-3.578	-6.873	-6.557	-3.702	-6.597	-6.625	-3.601	-3.96	-5.08	-1.49	-5.068	-1
	6695	149	-5.802	-6.000	-2.890	-5.568	-6.143	-2.836	-5.781	-5.940	-2.850	-3.96	-5.08	-1.49	-4.326	-1
	6855	181	-5.513	-6.203	-2.834	-5.535	-5.991	-2.747	-5.572	-6.144	-2.838	-3.96	-5.08	-1.49	-4.237	-1
UNII8	6875	185	-5.727	-6.750	-3.198	-5.677	-6.840	-3.209	-5.621	-6.824	-3.171	-3.99	-5.26	-1.59	-4.761	-1
	6995	209	-6.328	-5.868	-3.082	-6.348	-6.374	-3.351	-6.568	-6.207	-3.373	-3.99	-5.26	-1.59	-4.672	-1
	7115	233	-7.525	-6.272	-3.843	-7.533	-6.263	-3.841	-7.592	-6.326	-3.903	-3.99	-5.26	-1.59	-5.431	-1

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-4.235	-5.118	-1.643	-	-	-	-4.153	-5.299	-1.678	-2.45	-4.02	-0.19	-1.833	-1
	6175	45	-4.477	-5.178	-1.803	-	-	-	-4.110	-5.273	-1.642	-2.45	-4.02	-0.19	-1.832	-1
	6415	93	-5.528	-4.979	-2.234	-	-	-	-5.356	-4.859	-2.090	-2.45	-4.02	-0.19	-2.280	-1
UNII6	6435	97	-4.132	-4.336	-1.222	-	-	-	-4.129	-4.222	-1.165	-3.96	-5.08	-1.49	-2.655	-1
	6475	105	-4.218	-4.445	-1.319	-	-	-	-4.131	-4.437	-1.271	-3.96	-5.08	-1.49	-2.761	-1
	6515	113	-4.117	-4.654	-1.367	-	-	-	-4.450	-4.716	-1.570	-3.96	-5.08	-1.49	-2.857	-1
UNII7	6535	117	-4.427	-4.542	-1.473	-	-	-	-4.303	-4.511	-1.395	-3.96	-5.08	-1.49	-2.885	-1
	6695	149	-3.667	-4.367	-0.992	-	-	-	-3.617	-4.310	-0.939	-3.96	-5.08	-1.49	-2.429	-1
	6855	181	-3.597	-4.618	-1.067	-	-	-	-3.689	-4.553	-1.089	-3.96	-5.08	-1.49	-2.557	-1
UNII8	6875	185	-3.411	-5.002	-1.123	-	-	-	-3.694	-4.634	-1.128	-3.99	-5.26	-1.59	-2.713	-1
	6995	209	-4.475	-3.785	-1.106	-	-	-	-4.432	-4.063	-1.233	-3.99	-5.26	-1.59	-2.696	-1
	7115	233	-5.063	-4.353	-1.683	-	-	-	-5.284	-4.182	-1.687	-3.99	-5.26	-1.59	-3.273	-1

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-5.819	-6.961	-3.342	-6.023	-7.262	-3.588	-5.630	-6.908	-3.212	-2.45	-4.02	-0.19	-3.402	-1
	6165	43	-6.149	-5.838	-2.981	-6.254	-6.313	-3.273	-6.124	-6.268	-3.185	-2.45	-4.02	-0.19	-3.171	-1
	6405	91	-6.544	-6.045	-3.277	-7.034	-5.952	-3.449	-6.657	-5.733	-3.160	-2.45	-4.02	-0.19	-3.350	-1
UNII6	6445	99	-6.379	-6.080	-3.217	-6.301	-6.036	-3.156	-6.201	-5.879	-3.027	-3.96	-5.08	-1.49	-4.517	-1
	6485	107	-6.703	-5.895	-3.270	-6.732	-6.181	-3.438	-6.460	-6.056	-3.243	-3.96	-5.08	-1.49	-4.733	-1
	6525	115	-6.521	-5.963	-3.223	-6.690	-6.252	-3.455	-6.727	-6.427	-3.564	-3.96	-5.08	-1.49	-4.713	-1
UNII7	6565	123	-6.650	-6.403	-3.515	-6.876	-6.508	-3.678	-6.832	-6.244	-3.518	-3.96	-5.08	-1.49	-5.005	-1
	6685	147	-5.698	-5.890	-2.783	-5.933	-6.146	-3.028	-5.626	-6.043	-2.819	-3.96	-5.08	-1.49	-4.273	-1
	6845	179	-5.421	-6.203	-2.784	-5.604	-6.229	-2.895	-5.533	-6.027	-2.763	-3.96	-5.08	-1.49	-4.253	-1
UNII8	6885	187	-5.706	-6.759	-3.191	-5.905	-6.812	-3.325	-5.892	-6.540	-3.194	-3.99	-5.26	-1.59	-4.781	-1
	7005	211	-6.182	-6.083	-3.122	-6.463	-6.287	-3.364	-6.641	-6.403	-3.510	-3.99	-5.26	-1.59	-4.712	-1
	7085	227	-6.265	-5.243	-2.714	-6.687	-5.561	-3.077	-6.674	-5.476	-3.024	-3.99	-5.26	-1.59	-4.304	-1

Mode : EHT40 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-4.047	-5.575	-1.734	-4.491	-5.490	-1.952	-4.252	-5.533	-1.835	-2.45	-4.02	-0.19	-1.924	-1
	6165	43	-4.393	-5.258	-1.794	-4.623	-5.476	-2.019	-4.435	-5.567	-1.954	-2.45	-4.02	-0.19	-1.984	-1
UNII6	6405	91	-5.437	-4.920	-2.161	-5.485	-5.103	-2.280	-5.390	-4.969	-2.164	-2.45	-4.02	-0.19	-2.351	-1
	6445	99	-4.198	-4.210	-1.194	-4.097	-4.467	-1.268	-4.146	-4.516	-1.317	-3.96	-5.08	-1.49	-2.684	-1
	6485	107	-4.295	-4.252	-1.263	-4.491	-4.538	-1.504	-4.188	-4.286	-1.227	-3.96	-5.08	-1.49	-2.717	-1
	6525	115	-4.319	-4.483	-1.390	-4.452	-4.689	-1.559	-4.382	-4.783	-1.568	-3.96	-5.08	-1.49	-2.880	-1
UNII7	6565	123	-4.411	-4.537	-1.463	-4.417	-4.770	-1.580	-4.473	-4.564	-1.508	-3.96	-5.08	-1.49	-2.953	-1
	6685	147	-3.500	-4.293	-0.868	-3.715	-4.180	-0.931	-3.608	-4.366	-0.960	-3.96	-5.08	-1.49	-2.358	-1
	6845	179	-3.328	-4.681	-0.942	-3.804	-4.575	-1.162	-3.850	-4.661	-1.227	-3.96	-5.08	-1.49	-2.432	-1
UNII8	6885	187	-3.260	-4.959	-1.017	-3.884	-4.926	-1.364	-3.643	-4.796	-1.171	-3.99	-5.26	-1.59	-2.607	-1
	7005	211	-4.431	-4.059	-1.231	-4.834	-4.215	-1.503	-4.833	-4.156	-1.471	-3.99	-5.26	-1.59	-2.821	-1
	7085	227	-5.415	-4.236	-1.776	-5.810	-4.264	-1.958	-5.438	-4.127	-1.723	-3.99	-5.26	-1.59	-3.313	-1

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-5.618	-7.051	-3.265	-5.682	-6.927	-3.249	-5.598	-6.664	-3.088	-2.45	-4.02	-0.19	-3.278	-1
	6145	39	-6.338	-6.185	-3.250	-6.273	-6.168	-3.210	-5.890	-5.958	-2.913	-2.45	-4.02	-0.19	-3.103	-1
	6385	87	-6.447	-6.186	-3.304	-6.972	-6.116	-3.512	-6.437	-5.908	-3.154	-2.45	-4.02	-0.19	-3.344	-1
UNII6	6465	103	-6.317	-6.138	-3.216	-6.540	-6.098	-3.303	-6.321	-6.109	-3.203	-3.96	-5.08	-1.49	-4.693	-1
	6545	119	-6.503	-5.987	-3.227	-6.488	-6.347	-3.406	-6.414	-6.457	-3.425	-3.96	-5.08	-1.49	-4.717	-1
UNII7	6625	135	-6.125	-6.435	-3.267	-6.216	-6.109	-3.152	-5.947	-6.181	-3.052	-3.96	-5.08	-1.49	-4.542	-1
	6705	151	-5.760	-6.048	-2.891	-5.965	-5.916	-2.930	-5.824	-5.961	-2.881	-3.96	-5.08	-1.49	-4.371	-1
	6785	167	-6.088	-5.947	-3.006	-5.991	-5.855	-2.912	-6.011	-5.842	-2.915	-3.96	-5.08	-1.49	-4.402	-1
UNII8	6865	183	-5.229	-6.780	-2.925	-5.675	-6.834	-3.205	-5.746	-6.863	-3.258	-3.99	-5.26	-1.59	-4.515	-1
	6945	199	-5.763	-6.774	-3.229	-6.257	-6.930	-3.570	-6.582	-6.448	-3.504	-3.99	-5.26	-1.59	-4.819	-1
	7025	215	-6.455	-5.951	-3.185	-6.518	-6.109	-3.298	-7.049	-6.298	-3.647	-3.99	-5.26	-1.59	-4.775	-1

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-4.708	-5.678	-2.156	-4.578	-5.857	-2.160	-4.379	-5.684	-1.973	-2.45	-4.02	-0.19	-2.163	-1
	6145	39	-4.265	-5.305	-1.744	-4.578	-5.319	-1.923	-4.597	-5.337	-1.941	-2.45	-4.02	-0.19	-1.934	-1
	6385	87	-5.561	-4.757	-2.130	-5.668	-5.242	-2.440	-5.351	-4.668	-1.986	-2.45	-4.02	-0.19	-2.176	-1
UNII6	6465	103	-4.031	-4.367	-1.186	-4.573	-4.431	-1.491	-3.929	-4.241	-1.072	-3.96	-5.08	-1.49	-2.562	-1
	6545	119	-4.209	-4.279	-1.234	-4.377	-4.578	-1.466	-4.433	-4.488	-1.450	-3.96	-5.08	-1.49	-2.724	-1
UNII7	6625	135	-4.174	-4.596	-1.370	-4.313	-4.682	-1.483	-4.055	-4.527	-1.274	-3.96	-5.08	-1.49	-2.764	-1
	6705	151	-3.629	-4.078	-0.838	-3.809	-4.505	-1.133	-3.841	-4.339	-1.073	-3.96	-5.08	-1.49	-2.328	-1
	6785	167	-3.653	-4.408	-1.004	-4.038	-4.294	-1.154	-3.991	-4.473	-1.215	-3.96	-5.08	-1.49	-2.494	-1
UNII8	6865	183	-3.103	-4.683	-0.811	-3.676	-4.881	-1.227	-3.884	-4.882	-1.344	-3.99	-5.26	-1.59	-2.401	-1
	6945	199	-3.945	-4.698	-1.295	-4.272	-4.957	-1.591	-4.489	-4.626	-1.547	-3.99	-5.26	-1.59	-2.885	-1
	7025	215	-4.278	-3.957	-1.104	-4.759	-4.030	-1.369	-5.589	-4.088	-1.764	-3.99	-5.26	-1.59	-2.694	-1

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-5.099	-5.946	-2.492	-5.118	-5.941	-2.500	-5.142	-6.092	-2.581	-2.45	-4.02	-0.19	-2.682	-1
	6145	39	-5.630	-5.741	-2.675	-5.625	-5.372	-2.487	-5.402	-5.584	-2.482	-2.45	-4.02	-0.19	-2.672	-1
	6385	87	-6.014	-5.483	-2.731	-6.053	-5.488	-2.751	-6.181	-5.390	-2.758	-2.45	-4.02	-0.19	-2.921	-1
UNII6	6465	103	-4.346	-4.403	-1.365	-4.357	-4.208	-1.272	-4.385	-4.303	-1.334	-3.96	-5.08	-1.49	-2.762	-1
	6545	119	-4.843	-4.893	-1.858	-4.651	-4.727	-1.679	-4.655	-4.467	-1.550	-3.96	-5.08	-1.49	-3.040	-1
UNII7	6625	135	-4.688	-4.872	-1.769	-4.477	-4.722	-1.588	-4.763	-4.883	-1.813	-3.96	-5.08	-1.49	-3.078	-1
	6705	151	-4.182	-4.864	-1.500	-3.883	-4.740	-1.281	-4.099	-4.365	-1.220	-3.96	-5.08	-1.49	-2.710	-1
	6785	167	-4.243	-4.710	-1.460	-4.312	-4.797	-1.538	-4.401	-4.696	-1.536	-3.96	-5.08	-1.49	-2.950	-1
UNII8	6865	183	-4.294	-5.221	-1.723	-3.912	-5.012	-1.417	-3.813	-5.082	-1.391	-3.99	-5.26	-1.59	-2.981	-1
	6945	199	-3.822	-4.416	-1.099	-3.889	-4.201	-1.032	-4.079	-4.777	-1.404	-3.99	-5.26	-1.59	-2.622	-1
	7025	215	-4.917	-4.427	-1.655	-4.765	-3.776	-1.233	-4.661	-4.263	-1.448	-3.99	-5.26	-1.59	-2.823	-1

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.152	-6.475	-3.790	-7.015	-6.346	-3.658	-7.446	-6.617	-4.002	-2.45	-4.02	-0.19	-3.848	-1
	6185	47	-7.142	-7.452	-4.284	-6.412	-7.339	-3.841	-6.654	-6.810	-3.721	-2.45	-4.02	-0.19	-3.911	-1
	6345	79	-7.807	-7.273	-4.522	-7.484	-7.620	-4.541	-7.977	-7.710	-4.831	-2.45	-4.02	-0.19	-4.712	-1
UNII6	6505	111	-7.605	-6.912	-4.235	-7.481	-7.174	-4.315	-8.128	-7.587	-4.839	-3.96	-5.08	-1.49	-5.725	-1
UNII7	6665	143	-6.983	-6.977	-3.970	-6.813	-7.120	-3.954	-6.833	-6.976	-3.894	-3.96	-5.08	-1.49	-5.384	-1
UNII8	6825	175	-6.655	-7.380	-3.992	-6.774	-7.320	-4.028	-6.906	-7.344	-4.109	-3.99	-5.26	-1.59	-5.582	-1
	6985	207	-6.599	-7.515	-4.023	-6.898	-7.414	-4.138	-7.553	-6.965	-4.239	-3.99	-5.26	-1.59	-5.613	-1

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.129	-5.101	-2.104	-5.082	-5.344	-2.200	-5.165	-4.952	-2.047	-2.45	-4.02	-0.19	-2.237	-1
	6185	47	-5.106	-6.234	-2.623	-5.315	-6.190	-2.720	-4.816	-5.860	-2.296	-2.45	-4.02	-0.19	-2.486	-1
	6345	79	-5.254	-5.668	-2.445	-5.479	-5.763	-2.608	-5.729	-5.731	-2.719	-2.45	-4.02	-0.19	-2.635	-1
UNII6	6505	111	-5.370	-5.220	-2.284	-5.238	-5.530	-2.371	-6.076	-6.321	-3.186	-3.96	-5.08	-1.49	-3.774	-1
UNII7	6665	143	-5.045	-5.429	-2.222	-4.781	-5.243	-1.995	-4.837	-5.489	-2.140	-3.96	-5.08	-1.49	-3.485	-1
UNII8	6825	175	-5.249	-5.788	-2.499	-5.075	-5.688	-2.360	-5.071	-5.757	-2.390	-3.99	-5.26	-1.59	-3.950	-1
	6985	207	-4.831	-5.202	-2.002	-5.187	-5.257	-2.211	-5.727	-5.527	-2.615	-3.99	-5.26	-1.59	-3.592	-1

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.051	-6.153	-3.569	-6.996	-6.320	-3.635	-6.956	-6.253	-3.580	-2.45	-4.02	-0.19	-3.759	-1
	6185	47	-6.303	-7.033	-3.643	-6.521	-6.606	-3.553	-6.551	-7.134	-3.823	-2.45	-4.02	-0.19	-3.743	-1
	6345	79	-7.144	-6.733	-3.924	-7.240	-6.832	-4.021	-7.152	-6.900	-4.014	-2.45	-4.02	-0.19	-4.114	-1
UNII6	6505	111	-5.641	-5.379	-2.498	-5.541	-5.027	-2.266	-5.696	-5.234	-2.449	-3.96	-5.08	-1.49	-3.756	-1
UNII7	6665	143	-4.969	-5.147	-2.047	-5.025	-5.059	-2.032	-4.889	-5.187	-2.025	-3.96	-5.08	-1.49	-3.515	-1
UNII8	6825	175	-5.038	-5.287	-2.151	-4.886	-5.628	-2.231	-5.013	-5.644	-2.307	-3.99	-5.26	-1.59	-3.741	-1
	6985	207	-5.017	-5.481	-2.233	-4.967	-4.994	-1.970	-4.921	-5.121	-2.010	-3.99	-5.26	-1.59	-3.560	-1

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.145	-6.624	-3.867	-7.323	-6.834	-4.062	-7.407	-7.128	-4.255	-2.45	-4.02	-0.19	-4.057	-1
	6185	47	-6.512	-6.856	-3.671	-6.313	-6.649	-3.468	-6.846	-7.172	-3.996	-2.45	-4.02	-0.19	-3.658	-1
	6345	79	-8.069	-7.399	-4.711	-7.914	-7.398	-4.638	-7.421	-7.109	-4.252	-2.45	-4.02	-0.19	-4.442	-1
UNII6	6505	111	-8.418	-7.929	-5.157	-8.353	-7.974	-5.149	-7.825	-7.728	-4.766	-3.96	-5.08	-1.49	-6.256	-1
UNII7	6665	143	-7.024	-7.109	-4.056	-7.436	-7.741	-4.576	-7.943	-7.637	-4.777	-3.96	-5.08	-1.49	-5.546	-1
UNII8	6825	175	-6.665	-7.367	-3.992	-6.712	-6.972	-3.830	-7.121	-7.101	-4.101	-3.99	-5.26	-1.59	-5.420	-1
	6985	207	-7.121	-6.793	-3.944	-7.438	-7.178	-4.296	-8.211	-7.651	-4.912	-3.99	-5.26	-1.59	-5.534	-1

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.231	-5.225	-2.217	-5.595	-5.513	-2.543	-5.753	-6.212	-2.966	-2.45	-4.02	-0.19	-2.407	-1
	6185	47	-4.757	-5.806	-2.239	-4.766	-5.743	-2.216	-5.221	-6.118	-2.636	-2.45	-4.02	-0.19	-2.406	-1
	6345	79	-5.510	-5.727	-2.606	-5.426	-5.712	-2.556	-5.542	-5.249	-2.382	-2.45	-4.02	-0.19	-2.572	-1
UNII6	6505	111	-5.642	-6.279	-2.938	-5.966	-6.388	-3.161	-5.730	-6.209	-2.952	-3.96	-5.08	-1.49	-4.428	-1
UNII7	6665	143	-4.807	-5.387	-2.077	-5.155	-5.914	-2.507	-5.440	-6.315	-2.845	-3.96	-5.08	-1.49	-3.567	-1
UNII8	6825	175	-4.748	-5.371	-2.038	-4.678	-5.884	-2.229	-4.874	-5.831	-2.316	-3.99	-5.26	-1.59	-3.628	-1
	6985	207	-5.518	-5.177	-2.334	-6.181	-5.548	-2.842	-7.350	-5.591	-3.371	-3.99	-5.26	-1.59	-3.924	-1

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.642	-6.721	-3.671	-6.924	-6.390	-3.639	-6.828	-6.457	-3.628	-2.45	-4.02	-0.19	-3.818	-1
	6185	47	-6.286	-6.595	-3.428	-5.985	-6.341	-3.149	-5.913	-6.539	-3.205	-2.45	-4.02	-0.19	-3.339	-1
	6345	79	-7.060	-6.783	-3.909	-7.134	-6.425	-3.755	-7.197	-6.827	-3.998	-2.45	-4.02	-0.19	-3.945	-1
UNII6	6505	111	-5.739	-5.846	-2.782	-6.192	-6.087	-3.129	-6.124	-5.992	-3.047	-3.96	-5.08	-1.49	-4.272	-1
UNII7	6665	143	-4.973	-5.437	-2.189	-4.757	-5.350	-2.033	-4.936	-5.314	-2.111	-3.96	-5.08	-1.49	-3.523	-1
UNII8	6825	175	-4.699	-5.022	-1.847	-4.752	-5.425	-2.065	-4.915	-5.304	-2.095	-3.99	-5.26	-1.59	-3.437	-1
	6985	207	-5.979	-5.706	-2.830	-6.036	-5.539	-2.770	-5.828	-5.419	-2.609	-3.99	-5.26	-1.59	-4.199	-1

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.847	-6.201	-3.502	-6.900	-6.463	-3.666	-6.845	-6.484	-3.651	-2.45	-4.02	-0.19	-3.692	-1
	6185	47	-5.814	-6.413	-3.093	-5.873	-6.585	-3.205	-5.782	-6.695	-3.205	-2.45	-4.02	-0.19	-3.283	-1
	6345	79	-7.342	-6.963	-4.138	-7.240	-6.880	-4.046	-7.319	-6.958	-4.125	-2.45	-4.02	-0.19	-4.236	-1
UNII6	6505	111	-6.782	-6.712	-3.737	-6.336	-6.085	-3.199	-6.576	-6.201	-3.375	-3.96	-5.08	-1.49	-4.689	-1
UNII7	6665	143	-5.536	-6.095	-2.797	-5.684	-6.385	-3.010	-5.818	-6.344	-3.063	-3.96	-5.08	-1.49	-4.287	-1
UNII8	6825	175	-5.831	-6.464	-3.126	-5.748	-6.519	-3.106	-5.901	-6.566	-3.211	-3.99	-5.26	-1.59	-4.696	-1
	6985	207	-6.402	-6.530	-3.456	-5.774	-6.565	-3.142	-6.004	-6.393	-3.184	-3.99	-5.26	-1.59	-4.732	-1

Mode : EHT320(80LL) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-7.222	-6.431	-3.798	-6.776	-6.758	-3.757	-6.901	-6.654	-3.766	-2.45	-4.02	-0.19	-3.947	-1
	6265	63	-7.289	-8.104	-4.667	-7.281	-8.025	-4.627	-6.901	-7.112	-3.995	-2.45	-4.02	-0.19	-4.185	-1
UNII6	6425	95	-7.338	-7.459	-4.388	-7.292	-7.521	-4.395	-7.421	-7.503	-4.452	-3.96	-5.08	-1.49	-5.878	-1
	6585	127	-6.864	-7.098	-3.969	-7.306	-6.598	-3.928	-7.631	-7.417	-4.513	-3.96	-5.08	-1.49	-5.418	-1
UNII8	6745	159	-7.157	-6.238	-3.663	-6.749	-6.554	-3.640	-6.496	-6.552	-3.514	-3.99	-5.26	-1.59	-5.104	-1
	6905	191	-6.056	-7.916	-3.877	-6.633	-7.697	-4.122	-6.610	-7.923	-4.207	-3.99	-5.26	-1.59	-5.467	-1

Mode : EHT320(80LL) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.364	-5.517	-2.430	-4.971	-5.404	-2.172	-5.246	-5.186	-2.206	-2.45	-4.02	-0.19	-2.362	-1
	6265	63	-5.342	-6.152	-2.718	-5.490	-6.151	-2.798	-4.978	-5.505	-2.223	-2.45	-4.02	-0.19	-2.413	-1
UNII6	6425	95	-4.774	-5.409	-2.070	-5.105	-4.977	-2.030	-4.790	-5.062	-1.914	-3.96	-5.08	-1.49	-3.404	-1
	6585	127	-4.713	-4.803	-1.748	-5.049	-4.527	-1.770	-5.414	-5.297	-2.345	-3.96	-5.08	-1.49	-3.238	-1
UNII8	6745	159	-4.712	-4.961	-1.825	-4.539	-4.715	-1.616	-4.536	-4.665	-1.590	-3.99	-5.26	-1.59	-3.180	-1
	6905	191	-4.344	-5.576	-1.906	-4.233	-5.475	-1.800	-3.954	-5.382	-1.599	-3.99	-5.26	-1.59	-3.189	-1

Mode : EHT320(80LL) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.452	-6.323	-3.377	-6.506	-6.376	-3.430	-6.544	-6.232	-3.375	-2.45	-4.02	-0.19	-3.565	-1
	6265	63	-6.825	-7.078	-3.940	-6.867	-7.170	-4.006	-6.986	-7.247	-4.104	-2.45	-4.02	-0.19	-4.130	-1
UNII6	6425	95	-5.157	-5.294	-2.215	-4.847	-5.227	-2.023	-5.090	-5.320	-2.193	-3.96	-5.08	-1.49	-3.513	-1
	6585	127	-5.176	-4.780	-1.963	-4.968	-5.047	-1.997	-5.231	-4.791	-1.995	-3.96	-5.08	-1.49	-3.453	-1
UNII8	6745	159	-4.410	-4.477	-1.433	-4.865	-4.467	-1.651	-4.774	-4.637	-1.695	-3.99	-5.26	-1.59	-3.023	-1
	6905	191	-4.428	-5.388	-1.871	-4.416	-5.123	-1.745	-4.384	-5.368	-1.838	-3.99	-5.26	-1.59	-3.335	-1

Mode : EHT320(80LM) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.969	-6.719	-3.832	-7.002	-7.014	-3.998	-7.354	-7.059	-4.194	-2.45	-4.02	-0.19	-4.022	-1
	6265	63	-7.096	-7.260	-4.167	-6.735	-6.909	-3.811	-7.245	-7.251	-4.238	-2.45	-4.02	-0.19	-4.001	-1
UNII6	6425	95	-7.749	-7.213	-4.463	-7.486	-7.267	-4.365	-6.941	-6.965	-3.943	-3.96	-5.08	-1.49	-5.433	-1
	6585	127	-7.850	-7.628	-4.728	-8.260	-7.567	-4.890	-7.831	-7.047	-4.411	-3.96	-5.08	-1.49	-5.901	-1
UNII8	6745	159	-6.686	-6.392	-3.526	-7.145	-6.626	-3.868	-7.005	-7.184	-4.083	-3.99	-5.26	-1.59	-5.116	-1
	6905	191	-6.260	-7.883	-3.986	-6.460	-7.666	-4.011	-6.511	-7.267	-3.862	-3.99	-5.26	-1.59	-5.452	-1

Mode : EHT320(80LM) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.354	-5.087	-2.208	-4.939	-5.430	-2.167	-5.406	-6.084	-2.722	-2.45	-4.02	-0.19	-2.357	-1
	6265	63	-4.277	-5.435	-1.807	-4.320	-5.035	-1.653	-4.926	-5.347	-2.121	-2.45	-4.02	-0.19	-1.843	-1
UNII6	6425	95	-5.202	-5.645	-2.408	-5.387	-5.133	-2.248	-4.746	-4.798	-1.762	-3.96	-5.08	-1.49	-3.252	-1
	6585	127	-5.597	-5.491	-2.534	-5.521	-5.619	-2.560	-5.179	-5.333	-2.245	-3.96	-5.08	-1.49	-3.735	-1
UNII8	6745	159	-4.723	-4.745	-1.724	-4.577	-4.856	-1.704	-5.236	-5.409	-2.312	-3.99	-5.26	-1.59	-3.294	-1
	6905	191	-4.263	-5.699	-1.912	-4.195	-5.529	-1.801	-4.344	-5.359	-1.812	-3.99	-5.26	-1.59	-3.391	-1

Mode : EHT320(80LM) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.657	-6.731	-3.684	-6.612	-6.696	-3.644	-6.673	-6.573	-3.613	-2.45	-4.02	-0.19	-3.803	-1
	6265	63	-6.239	-6.376	-3.297	-6.226	-6.191	-3.198	-6.127	-6.493	-3.296	-2.45	-4.02	-0.19	-3.388	-1
UNII6	6425	95	-4.865	-4.484	-1.660	-4.739	-4.600	-1.659	-4.912	-4.840	-1.866	-3.96	-5.08	-1.49	-3.149	-1
	6585	127	-5.288	-5.225	-2.246	-5.306	-4.649	-1.955	-5.496	-5.115	-2.291	-3.96	-5.08	-1.49	-3.445	-1
UNII8	6745	159	-4.799	-4.542	-1.659	-4.768	-4.637	-1.692	-4.828	-4.729	-1.768	-3.99	-5.26	-1.59	-3.249	-1
	6905	191	-4.230	-4.747	-1.471	-4.142	-4.678	-1.392	-4.379	-5.145	-1.735	-3.99	-5.26	-1.59	-2.982	-1

Mode : EHT320(80MH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-7.555	-7.394	-4.464	-7.424	-7.366	-4.385	-7.006	-6.905	-3.945	-2.45	-4.02	-0.19	-4.135	-1
	6265	63	-7.694	-7.419	-4.544	-8.104	-7.349	-4.700	-8.195	-7.735	-4.949	-2.45	-4.02	-0.19	-4.734	-1
UNII6	6425	95	-7.277	-6.657	-3.946	-7.504	-7.012	-4.241	-8.043	-7.310	-4.651	-3.96	-5.08	-1.49	-5.436	-1
	6585	127	-7.766	-7.492	-4.617	-7.511	-7.692	-4.590	-7.453	-7.628	-4.530	-3.96	-5.08	-1.49	-6.020	-1
UNII8	6745	159	-7.058	-6.879	-3.957	-7.325	-7.373	-4.339	-7.524	-7.408	-4.456	-3.99	-5.26	-1.59	-5.547	-1
	6905	191	-6.599	-7.870	-4.178	-7.374	-7.888	-4.613	-7.330	-7.628	-4.466	-3.99	-5.26	-1.59	-5.768	-1

Mode : EHT320(80MH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-5.046	-5.550	-2.281	-5.249	-5.843	-2.526	-4.909	-5.182	-2.033	-2.45	-4.02	-0.19	-2.223	-1
	6265	63	-5.103	-5.280	-2.181	-5.442	-5.698	-2.558	-5.300	-5.540	-2.408	-2.45	-4.02	-0.19	-2.371	-1
UNII6	6425	95	-4.606	-4.768	-1.676	-5.180	-5.204	-2.182	-5.668	-5.837	-2.742	-3.96	-5.08	-1.49	-3.166	-1
	6585	127	-4.913	-5.530	-2.200	-5.327	-5.449	-2.377	-5.218	-5.171	-2.184	-3.96	-5.08	-1.49	-3.674	-1
UNII8	6745	159	-5.002	-5.250	-2.114	-5.324	-5.473	-2.388	-5.164	-5.480	-2.309	-3.99	-5.26	-1.59	-3.704	-1
	6905	191	-4.650	-5.232	-1.921	-4.775	-5.805	-2.249	-5.771	-5.665	-2.708	-3.99	-5.26	-1.59	-3.511	-1

Mode : EHT320(80MH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.060	-5.809	-2.923	-5.515	-5.566	-2.530	-5.992	-5.814	-2.892	-2.45	-4.02	-0.19	-2.720	-1
	6265	63	-6.213	-5.768	-2.975	-5.674	-4.971	-2.298	-5.966	-5.685	-2.813	-2.45	-4.02	-0.19	-2.488	-1
UNII6	6425	95	-4.649	-4.671	-1.650	-4.595	-3.949	-1.250	-4.825	-4.805	-1.805	-3.96	-5.08	-1.49	-2.740	-1
	6585	127	-4.938	-4.852	-1.885	-4.877	-5.007	-1.931	-4.946	-4.952	-1.939	-3.96	-5.08	-1.49	-3.375	-1
UNII8	6745	159	-4.941	-4.858	-1.889	-4.595	-4.823	-1.697	-5.007	-4.962	-1.974	-3.99	-5.26	-1.59	-3.287	-1
	6905	191	-4.723	-5.032	-1.865	-4.169	-4.602	-1.370	-4.287	-5.043	-1.639	-3.99	-5.26	-1.59	-2.960	-1

Mode : EHT320(80HH) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-6.980	-6.616	-3.784	-7.088	-6.756	-3.909	-7.409	-7.105	-4.244	-2.45	-4.02	-0.19	-3.974	-1
	6265	63	-7.867	-7.077	-4.444	-7.875	-7.125	-4.474	-7.700	-7.219	-4.443	-2.45	-4.02	-0.19	-4.633	-1
UNII6	6425	95	-7.915	-7.854	-4.874	-8.527	-8.040	-5.267	-7.748	-8.116	-4.918	-3.96	-5.08	-1.49	-6.364	-1
	6585	127	-7.300	-6.909	-4.090	-7.748	-7.656	-4.692	-8.032	-8.244	-5.127	-3.96	-5.08	-1.49	-5.580	-1
UNII8	6745	159	-7.105	-6.629	-3.850	-7.709	-6.666	-4.146	-7.614	-6.915	-4.240	-3.99	-5.26	-1.59	-5.440	-1
	6905	191	-6.699	-6.486	-3.581	-7.453	-6.594	-3.992	-7.667	-6.841	-4.224	-3.99	-5.26	-1.59	-5.171	-1

Mode : EHT320(80HH) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-4.552	-4.810	-1.669	-4.959	-5.200	-2.068	-4.841	-5.529	-2.161	-2.45	-4.02	-0.19	-1.859	-1
	6265	63	-5.740	-5.399	-2.556	-5.513	-5.340	-2.416	-5.323	-5.122	-2.211	-2.45	-4.02	-0.19	-2.401	-1
UNII6	6425	95	-5.703	-6.030	-2.853	-5.735	-6.169	-2.936	-5.557	-5.656	-2.596	-3.96	-5.08	-1.49	-4.086	-1
	6585	127	-5.166	-5.321	-2.233	-5.708	-5.707	-2.697	-6.004	-6.140	-3.061	-3.96	-5.08	-1.49	-3.723	-1
UNII8	6745	159	-4.867	-5.297	-2.067	-5.303	-5.307	-2.295	-5.502	-5.224	-2.351	-3.99	-5.26	-1.59	-3.657	-1
	6905	191	-5.424	-5.021	-2.208	-5.938	-5.266	-2.579	-6.308	-5.749	-3.009	-3.99	-5.26	-1.59	-3.798	-1

Mode : EHT320(80HH) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-5.734	-5.520	-2.616	-5.814	-5.809	-2.801	-5.806	-5.579	-2.681	-2.45	-4.02	-0.19	-2.806	-1
	6265	63	-6.505	-6.167	-3.323	-6.563	-5.916	-3.217	-6.789	-6.393	-3.576	-2.45	-4.02	-0.19	-3.407	-1
UNII6	6425	95	-5.817	-5.923	-2.860	-5.717	-5.722	-2.709	-5.903	-5.831	-2.857	-3.96	-5.08	-1.49	-4.199	-1
	6585	127	-5.121	-5.500	-2.296	-5.042	-5.323	-2.170	-5.202	-5.413	-2.296	-3.96	-5.08	-1.49	-3.660	-1
UNII8	6745	159	-5.257	-4.921	-2.076	-5.144	-5.214	-2.169	-5.294	-5.138	-2.205	-3.99	-5.26	-1.59	-3.666	-1
	6905	191	-6.178	-5.645	-2.893	-5.630	-5.248	-2.425	-5.867	-5.169	-2.494	-3.99	-5.26	-1.59	-4.015	-1

Mode : EHT320(160L) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-6.434	-6.827	-3.616	-6.575	-6.894	-3.721	-6.552	-6.674	-3.602	-2.45	-4.02	-0.19	-3.792	-1
	6265	63	-6.236	-5.982	-3.097	-5.858	-5.892	-2.865	-5.894	-6.021	-2.947	-2.45	-4.02	-0.19	-3.055	-1
UNII6	6425	95	-5.412	-5.283	-2.337	-5.168	-5.159	-2.153	-6.003	-5.617	-2.795	-3.96	-5.08	-1.49	-3.643	-1
	6585	127	-6.053	-5.789	-2.909	-5.904	-5.720	-2.801	-6.461	-5.892	-3.157	-3.96	-5.08	-1.49	-4.291	-1
UNII8	6745	159	-5.601	-5.698	-2.639	-5.514	-5.565	-2.529	-5.534	-5.693	-2.602	-3.99	-5.26	-1.59	-4.119	-1
	6905	191	-4.577	-5.336	-1.930	-4.933	-5.414	-2.156	-5.245	-5.990	-2.591	-3.99	-5.26	-1.59	-3.520	-1

Mode : EHT320(160U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-5.426	-5.399	-2.402	-5.192	-5.049	-2.110	-5.353	-5.448	-2.390	-2.45	-4.02	-0.19	-2.300	-1
	6265	63	-5.937	-5.864	-2.890	-5.359	-4.894	-2.110	-5.353	-5.212	-2.272	-2.45	-4.02	-0.19	-2.300	-1
UNII6	6425	95	-5.678	-6.045	-2.847	-4.637	-5.034	-1.821	-5.197	-4.991	-2.082	-3.96	-5.08	-1.49	-3.311	-1
	6585	127	-5.413	-6.041	-2.705	-5.220	-5.371	-2.284	-5.548	-5.823	-2.673	-3.96	-5.08	-1.49	-3.774	-1
UNII8	6745	159	-5.562	-6.234	-2.875	-5.111	-5.594	-2.335	-5.069	-5.435	-2.238	-3.99	-5.26	-1.59	-3.828	-1
	6905	191	-5.823	-5.987	-2.894	-4.860	-5.589	-2.199	-4.769	-5.832	-2.258	-3.99	-5.26	-1.59	-3.789	-1

Mode : EHT320 3x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.202	-9.325	-6.253	-9.076	-9.032	-6.044	-9.269	-9.781	-6.507	-2.45	-4.02	-0.19	-6.234	-1
	6265	63	-9.458	-9.072	-6.250	-8.841	-9.002	-5.911	-9.148	-9.531	-6.325	-2.45	-4.02	-0.19	-6.101	-1
UNII6	6425	95	-9.061	-9.240	-6.139	-8.946	-8.948	-5.937	-9.195	-9.065	-6.119	-3.96	-5.08	-1.49	-7.427	-1
	6585	127	-9.446	-9.620	-6.522	-9.002	-9.108	-6.044	-9.791	-9.402	-6.582	-3.96	-5.08	-1.49	-7.534	-1
UNII8	6745	159	-9.124	-9.575	-6.333	-9.168	-9.411	-6.278	-9.348	-9.499	-6.413	-3.99	-5.26	-1.59	-7.868	-1
	6905	191	-9.352	-10.269	-6.776	-9.342	-9.687	-6.501	-9.206	-9.916	-6.536	-3.99	-5.26	-1.59	-8.091	-1

Mode : EHT320 2x996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-8.394	-8.876	-5.618	-8.262	-8.895	-5.557	-8.547	-8.595	-5.561	-2.45	-4.02	-0.19	-5.747	-1
	6265	63	-8.349	-8.602	-5.464	-8.180	-8.550	-5.351	-8.236	-8.313	-5.264	-2.45	-4.02	-0.19	-5.454	-1
UNII6	6425	95	-8.645	-8.419	-5.521	-8.185	-8.146	-5.156	-8.313	-8.382	-5.338	-3.96	-5.08	-1.49	-6.646	-1
	6585	127	-8.975	-8.865	-5.910	-9.201	-8.598	-5.879	-8.852	-8.662	-5.746	-3.96	-5.08	-1.49	-7.236	-1
UNII8	6745	159	-8.409	-8.718	-5.551	-8.279	-8.628	-5.440	-8.452	-8.764	-5.595	-3.99	-5.26	-1.59	-7.030	-1
	6905	191	-8.245	-9.133	-5.656	-8.545	-8.899	-5.709	-8.368	-9.181	-5.746	-3.99	-5.26	-1.59	-7.246	-1

Mode : EHT320 3x996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.872	-10.102	-6.975	-9.597	-9.811	-6.692	-9.739	-9.803	-6.760	-2.45	-4.02	-0.19	-6.882	-1
	6265	63	-9.938	-9.602	-6.756	-9.462	-9.422	-6.431	-9.855	-9.696	-6.764	-2.45	-4.02	-0.19	-6.621	-1
UNII6	6425	95	-9.541	-9.694	-6.606	-9.414	-9.575	-6.483	-9.738	-9.528	-6.621	-3.96	-5.08	-1.49	-7.973	-1
	6585	127	-10.127	-9.810	-6.955	-9.935	-10.109	-7.011	-10.028	-9.988	-6.997	-3.96	-5.08	-1.49	-8.445	-1
UNII8	6745	159	-9.888	-9.902	-6.884	-9.553	-9.897	-6.711	-9.921	-9.860	-6.880	-3.99	-5.26	-1.59	-8.301	-1
	6905	191	-9.532	-10.738	-7.083	-9.969	-10.271	-7.107	-9.790	-10.415	-7.081	-3.99	-5.26	-1.59	-8.671	-1

10.4.2 Standard client

Standard client Limit : 17 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.4.2.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-2.951	10.090	10.301	-4.224	8.535	8.759	-2.759	10.025	10.248	-2.45	-4.02	-0.19	10.111	17
	6175	45	11.050	10.820	13.947	9.270	9.218	12.255	10.818	10.861	13.850	-2.45	-4.02	-0.19	13.757	17
	6415	93	9.554	10.701	13.176	8.138	9.359	11.802	9.655	10.814	13.284	-2.45	-4.02	-0.19	13.094	17
UNII7	6535	117	9.510	10.494	13.040	8.495	8.925	11.726	9.428	10.548	13.035	-3.96	-5.08	-1.49	11.550	17
	6695	149	10.594	11.178	13.906	9.335	9.560	12.459	10.777	10.921	13.860	-3.96	-5.08	-1.49	12.416	17
	6855	181	10.587	10.635	13.622	9.241	9.166	12.214	10.687	10.531	13.620	-3.96	-5.08	-1.49	12.132	17
Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.215	7.418	7.778	-3.707	7.271	7.605	-2.993	7.297	7.686	-2.45	-4.02	-0.19	7.588	17
	6175	45	8.108	8.010	11.070	7.901	7.780	10.851	8.045	8.015	11.041	-2.45	-4.02	-0.19	10.880	17
	6415	93	6.951	7.877	10.449	6.648	7.907	10.333	6.787	8.350	10.649	-2.45	-4.02	-0.19	10.459	17
UNII7	6535	117	6.654	7.459	10.086	6.514	7.395	9.987	6.721	7.620	10.204	-3.96	-5.08	-1.49	8.714	17
	6695	149	7.721	7.849	10.796	7.576	7.747	10.673	7.737	7.913	10.836	-3.96	-5.08	-1.49	9.346	17
	6855	181	7.991	7.636	10.828	7.619	7.595	10.618	7.901	7.661	10.793	-3.96	-5.08	-1.49	9.338	17
Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-3.903	4.268	4.884	-	-	-	-3.881	4.262	4.882	-2.45	-4.02	-0.19	4.694	17
	6175	45	5.025	4.885	7.966	-	-	-	5.047	5.051	8.060	-2.45	-4.02	-0.19	7.870	17
	6415	93	3.514	4.866	7.253	-	-	-	3.790	4.905	7.394	-2.45	-4.02	-0.19	7.204	17
UNII7	6535	117	3.922	4.722	7.351	-	-	-	3.611	4.465	7.070	-3.96	-5.08	-1.49	5.861	17
	6695	149	4.810	5.049	7.942	-	-	-	4.609	5.206	7.928	-3.96	-5.08	-1.49	6.452	17
	6855	181	4.946	4.644	7.808	-	-	-	4.744	4.764	7.765	-3.96	-5.08	-1.49	6.318	17
Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-3.140	2.730	3.730	-	-	-	-2.45	-4.02	-0.19	3.540	17
	6175	45	-	-	-	3.702	3.552	6.638	-	-	-	-2.45	-4.02	-0.19	6.448	17
	6415	93	-	-	-	2.383	3.387	5.924	-	-	-	-2.45	-4.02	-0.19	5.734	17
UNII7	6535	117	-	-	-	2.483	3.194	5.864	-	-	-	-3.96	-5.08	-1.49	4.374	17
	6695	149	-	-	-	3.231	3.636	6.449	-	-	-	-3.96	-5.08	-1.49	4.959	17
	6855	181	-	-	-	3.384	3.100	6.255	-	-	-	-3.96	-5.08	-1.49	4.765	17

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-6.903	2.199	2.702	-	-	-	-2.45	-4.02	-0.19	2.512	17
	6175	45	-	-	-	1.800	0.620	4.260	-	-	-	-2.45	-4.02	-0.19	4.070	17
	6415	93	-	-	-	0.361	0.780	3.586	-	-	-	-2.45	-4.02	-0.19	3.396	17
UNII7	6535	117	-	-	-	0.188	0.249	3.229	-	-	-	-3.96	-5.08	-1.49	1.739	17
	6695	149	-	-	-	1.232	0.853	4.057	-	-	-	-3.96	-5.08	-1.49	2.567	17
	6855	181	-	-	-	1.449	0.849	4.169	-	-	-	-3.96	-5.08	-1.49	2.679	17

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	10.186	9.622	12.924	10.317	9.637	13.001	10.714	9.963	13.365	-2.45	-4.02	-0.19	13.175	17
	6165	43	10.768	10.802	13.796	10.609	10.614	13.622	10.717	10.708	13.723	-2.45	-4.02	-0.19	13.606	17
	6405	91	9.790	10.413	13.123	9.654	10.409	13.058	9.875	10.763	13.352	-2.45	-4.02	-0.19	13.162	17
UNII7	6565	123	9.835	10.175	13.019	9.669	9.952	12.823	9.565	10.009	12.803	-3.96	-5.08	-1.49	11.529	17
	6685	147	10.475	11.043	13.779	10.527	10.575	13.562	10.300	10.545	13.435	-3.96	-5.08	-1.49	12.289	17
	6845	179	10.426	10.462	13.455	10.655	9.983	13.342	10.312	10.426	13.380	-3.96	-5.08	-1.49	11.965	17

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	7.737	7.160	10.468	7.534	6.975	10.274	7.794	7.110	10.476	-2.45	-4.02	-0.19	10.286	17
	6165	43	8.067	7.924	11.006	7.710	7.780	10.755	8.020	7.827	10.935	-2.45	-4.02	-0.19	10.816	17
	6405	91	6.963	7.749	10.384	7.012	7.632	10.343	6.955	7.730	10.370	-2.45	-4.02	-0.19	10.194	17
UNII7	6565	123	7.184	7.513	10.362	6.972	7.315	10.157	6.895	7.232	10.077	-3.96	-5.08	-1.49	8.872	17
	6685	147	8.120	7.948	11.045	7.697	7.643	10.680	7.898	8.000	10.960	-3.96	-5.08	-1.49	9.555	17
	6845	179	7.895	7.673	10.796	7.675	7.589	10.642	7.603	7.768	10.697	-3.96	-5.08	-1.49	9.306	17

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	4.849	4.121	7.511	4.605	4.050	7.347	4.968	4.292	7.654	-2.45	-4.02	-0.19	7.464	17
	6165	43	5.281	4.796	8.056	4.927	4.913	7.930	5.195	4.894	8.058	-2.45	-4.02	-0.19	7.868	17
	6405	91	4.157	4.833	7.519	3.882	4.672	7.305	4.108	4.967	7.569	-2.45	-4.02	-0.19	7.379	17
UNII7	6565	123	4.100	4.689	7.415	3.823	4.523	7.198	4.083	4.447	7.279	-3.96	-5.08	-1.49	5.925	17
	6685	147	4.876	5.002	7.950	4.708	5.084	7.911	5.006	4.835	7.932	-3.96	-5.08	-1.49	6.460	17
	6845	179	4.927	4.783	7.866	4.623	4.394	7.520	4.598	4.567	7.593	-3.96	-5.08	-1.49	6.376	17

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	3.122	2.457	5.813	-	-	-	3.353	2.726	6.061	-2.45	-4.02	-0.19	5.871	17
	6165	43	3.527	3.270	6.411	-	-	-	3.655	3.165	6.427	-2.45	-4.02	-0.19	6.237	17
	6405	91	2.449	3.065	5.778	-	-	-	2.209	3.464	5.892	-2.45	-4.02	-0.19	5.702	17
UNII7	6565	123	2.576	3.103	5.858	-	-	-	2.374	2.957	5.686	-3.96	-5.08	-1.49	4.368	17
	6685	147	3.365	3.474	6.430	-	-	-	3.424	3.432	6.439	-3.96	-5.08	-1.49	4.949	17
	6845	179	3.688	3.273	6.496	-	-	-	3.058	2.895	5.988	-3.96	-5.08	-1.49	5.006	17

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-0.645	-1.301	2.050	-	-	-	-2.45	-4.02	-0.19	1.860	17
	6165	43	-	-	-	-0.431	-0.479	2.555	-	-	-	-2.45	-4.02	-0.19	2.365	17
	6405	91	-	-	-	-1.549	-0.547	1.991	-	-	-	-2.45	-4.02	-0.19	1.801	17
UNII7	6565	123	-	-	-	-1.539	-0.864	1.822	-	-	-	-3.96	-5.08	-1.49	0.332	17
	6685	147	-	-	-	-0.460	-0.629	2.467	-	-	-	-3.96	-5.08	-1.49	0.977	17
	6845	179	-	-	-	-0.488	-0.873	2.334	-	-	-	-3.96	-5.08	-1.49	0.844	17

Mode : EHT40 5U

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-1.199	-1.858	1.494	-	-	-	-2.45	-4.02	-0.19	1.304	17
	6165	43	-	-	-	-0.850	-0.959	2.106	-	-	-	-2.45	-4.02	-0.19	1.916	17
	6405	91	-	-	-	-2.083	-1.055	1.472	-	-	-	-2.45	-4.02	-0.19	1.282	17
UNII7	6565	123	-	-	-	-2.039	-1.397	1.304	-	-	-	-3.96	-5.08	-1.49	-0.186	17
	6685	147	-	-	-	-0.835	-0.951	2.118	-	-	-	-3.96	-5.08	-1.49	0.628	17
	6845	179	-	-	-	-1.003	-1.422	1.803	-	-	-	-3.96	-5.08	-1.49	0.313	17

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	10.331	9.797	13.083	10.252	10.258	13.266	10.900	10.141	13.548	-2.45	-4.02	-0.19	13.358	17
	6145	39	11.142	10.954	14.060	10.492	10.549	13.531	10.844	10.203	13.546	-2.45	-4.02	-0.19	13.870	17
	6385	87	9.447	10.689	13.123	9.464	10.689	13.130	9.531	10.262	12.923	-2.45	-4.02	-0.19	12.940	17
UNII7	6625	135	9.919	10.207	13.076	9.535	10.277	12.933	9.981	10.532	13.276	-3.96	-5.08	-1.49	11.786	17
	6705	151	10.283	10.736	13.526	10.698	10.426	13.575	10.320	10.465	13.404	-3.96	-5.08	-1.49	12.085	17
	6785	167	10.364	10.203	13.295	10.217	10.681	13.466	10.298	10.239	13.279	-3.96	-5.08	-1.49	11.976	17

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	7.684	7.457	10.583	7.904	7.553	10.743	8.088	7.674	10.897	-2.45	-4.02	-0.19	10.707	17
	6145	39	8.092	8.227	11.171	8.484	7.764	11.150	7.804	7.700	10.763	-2.45	-4.02	-0.19	10.981	17
	6385	87	7.085	7.874	10.508	6.922	7.722	10.351	7.127	8.109	10.656	-2.45	-4.02	-0.19	10.466	17
UNII7	6625	135	7.290	7.585	10.451	6.993	7.481	10.255	7.475	7.926	10.717	-3.96	-5.08	-1.49	9.227	17
	6705	151	7.876	8.152	11.027	7.597	7.894	10.759	7.944	7.756	10.862	-3.96	-5.08	-1.49	9.537	17
	6785	167	8.023	7.829	10.938	7.728	7.773	10.761	7.445	7.906	10.692	-3.96	-5.08	-1.49	9.448	17

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	4.618	4.166	7.408	4.771	4.581	7.688	5.077	4.378	7.752	-2.45	-4.02	-0.19	7.562	17
	6145	39	4.930	5.050	8.001	5.050	4.961	8.016	4.892	5.099	8.007	-2.45	-4.02	-0.19	7.826	17
	6385	87	3.855	4.809	7.369	4.119	4.802	7.484	4.257	4.926	7.615	-2.45	-4.02	-0.19	7.425	17
UNII7	6625	135	4.360	4.836	7.615	4.463	4.436	7.460	4.426	4.616	7.533	-3.96	-5.08	-1.49	6.125	17
	6705	151	5.080	5.023	8.062	4.886	4.828	7.868	4.920	4.734	7.839	-3.96	-5.08	-1.49	6.572	17
	6785	167	4.834	4.707	7.781	4.569	4.746	7.669	4.287	4.642	7.479	-3.96	-5.08	-1.49	6.291	17

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	3.182	2.707	5.961	3.310	3.158	6.245	3.806	3.229	6.538	-2.45	-4.02	-0.19	6.348	17
	6145	39	3.758	3.620	6.700	3.603	3.529	6.577	3.511	3.684	6.609	-2.45	-4.02	-0.19	6.510	17
	6385	87	2.243	3.549	5.955	2.695	3.344	6.042	2.452	3.380	5.951	-2.45	-4.02	-0.19	5.852	17
UNII7	6625	135	2.814	2.963	5.900	2.881	3.050	5.977	3.125	3.497	6.325	-3.96	-5.08	-1.49	4.835	17
	6705	151	3.487	3.368	6.438	3.364	3.376	6.380	3.630	3.527	6.589	-3.96	-5.08	-1.49	5.099	17
	6785	167	3.436	3.449	6.453	3.259	3.386	6.333	3.146	3.255	6.211	-3.96	-5.08	-1.49	4.963	17

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-0.518	-1.066	2.227	-	-	-	-0.269	-0.753	2.506	-2.45	-4.02	-0.19	2.316	17
	6145	39	-0.070	-0.220	2.866	-	-	-	-0.427	-0.579	2.508	-2.45	-4.02	-0.19	2.676	17
	6385	87	-1.284	-0.704	2.026	-	-	-	-1.475	-0.596	1.997	-2.45	-4.02	-0.19	1.836	17
UNII7	6625	135	-0.656	-0.605	2.380	-	-	-	-1.004	-0.627	2.199	-3.96	-5.08	-1.49	0.890	17
	6705	151	-0.308	-0.546	2.585	-	-	-	-0.537	-0.388	2.549	-3.96	-5.08	-1.49	1.095	17
	6785	167	-0.540	-0.527	2.477	-	-	-	-0.480	-0.552	2.495	-3.96	-5.08	-1.49	1.005	17

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-3.683	-4.170	-0.909	-	-	-	-2.45	-4.02	-0.19	-1.099	17
	6145	39	-	-	-	-3.575	-3.403	-0.477	-	-	-	-2.45	-4.02	-0.19	-0.667	17
	6385	87	-	-	-	-4.733	-3.683	-1.166	-	-	-	-2.45	-4.02	-0.19	-1.356	17
UNII7	6625	135	-	-	-	-4.252	-3.955	-1.090	-	-	-	-3.96	-5.08	-1.49	-2.580	17
	6705	151	-	-	-	-3.662	-3.676	-0.658	-	-	-	-3.96	-5.08	-1.49	-2.148	17
	6785	167	-	-	-	-3.702	-3.345	-0.509	-	-	-	-3.96	-5.08	-1.49	-1.999	17

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-3.940	-4.579	-1.237	-	-	-	-2.45	-4.02	-0.19	-1.427	17
	6145	39	-	-	-	-3.695	-3.619	-0.646	-	-	-	-2.45	-4.02	-0.19	-0.836	17
	6385	87	-	-	-	-4.948	-3.937	-1.403	-	-	-	-2.45	-4.02	-0.19	-1.593	17
UNII7	6625	135	-	-	-	-4.472	-3.999	-1.219	-	-	-	-3.96	-5.08	-1.49	-2.709	17
	6705	151	-	-	-	-3.733	-4.003	-0.856	-	-	-	-3.96	-5.08	-1.49	-2.346	17
	6785	167	-	-	-	-3.543	-4.029	-0.769	-	-	-	-3.96	-5.08	-1.49	-2.259	17

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	9.202	9.732	12.486	9.506	10.029	12.786	9.638	10.266	12.974	-2.45	-4.02	-0.19	12.784	17
	6185	47	9.327	9.208	12.279	9.607	9.569	12.599	10.106	9.102	12.644	-2.45	-4.02	-0.19	12.454	17
	6345	79	8.401	9.091	11.770	8.693	8.592	11.653	8.767	8.916	11.853	-2.45	-4.02	-0.19	11.663	17
UNII7	6665	143	9.328	9.616	12.485	9.558	9.210	12.398	9.931	9.528	12.745	-3.96	-5.08	-1.49	11.255	17

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	6.285	7.327	9.848	6.786	7.770	10.316	6.947	7.821	10.416	-2.45	-4.02	-0.19	10.226	17
	6185	47	6.926	6.648	9.800	7.098	6.983	10.051	7.094	6.641	9.884	-2.45	-4.02	-0.19	9.861	17
	6345	79	6.110	6.547	9.344	5.653	6.414	9.061	5.847	6.747	9.331	-2.45	-4.02	-0.19	9.154	17
UNII7	6665	143	6.957	6.575	9.781	6.746	6.939	9.854	7.051	7.146	10.109	-3.96	-5.08	-1.49	8.619	17

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	4.044	4.578	7.330	3.902	4.849	7.412	4.660	4.572	7.627	-2.45	-4.02	-0.19	7.437	17
	6185	47	4.466	3.759	7.137	4.321	3.949	7.149	4.581	4.174	7.393	-2.45	-4.02	-0.19	7.203	17
	6345	79	3.460	3.916	6.704	2.824	3.733	6.313	2.793	3.962	6.427	-2.45	-4.02	-0.19	6.514	17
UNII7	6665	143	3.818	4.052	6.947	4.010	4.065	7.048	3.948	4.204	7.088	-3.96	-5.08	-1.49	5.598	17

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	2.327	2.958	5.664	2.325	3.001	5.687	2.383	3.147	5.792	-2.45	-4.02	-0.19	5.602	17
	6185	47	2.700	2.168	5.453	2.541	2.628	5.595	2.728	2.536	5.644	-2.45	-4.02	-0.19	5.454	17
	6345	79	1.616	2.096	4.873	1.484	2.172	4.852	1.300	2.230	4.800	-2.45	-4.02	-0.19	4.683	17
UNII7	6665	143	2.269	2.281	5.285	2.584	2.574	5.589	2.581	2.621	5.611	-3.96	-5.08	-1.49	4.121	17

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-1.223	-0.840	1.983	-	-	-	-1.135	-0.724	2.086	-2.45	-4.02	-0.19	1.896	17
	6185	47	-1.506	-1.705	1.406	-	-	-	-0.972	-1.561	1.754	-2.45	-4.02	-0.19	1.564	17
	6345	79	-2.157	-1.738	1.068	-	-	-	-2.692	-1.850	0.760	-2.45	-4.02	-0.19	0.878	17
UNII7	6665	143	-1.303	-1.347	1.686	-	-	-	-1.268	-1.405	1.675	-3.96	-5.08	-1.49	0.196	17

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-4.210	-3.903	-1.043	-	-	-	-2.45	-4.02	-0.19	-1.233	17
	6185	47	-	-	-	-4.075	-4.663	-1.348	-	-	-	-2.45	-4.02	-0.19	-1.538	17
	6345	79	-	-	-	-5.666	-4.828	-2.216	-	-	-	-2.45	-4.02	-0.19	-2.406	17
UNII7	6665	143	-	-	-	-4.521	-4.375	-1.437	-	-	-	-3.96	-5.08	-1.49	-2.927	17

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	9.670	10.282	12.997	8.875	9.417	12.165	8.960	9.388	12.190	-2.45	-4.02	-0.19	12.807	17
	6185	47	10.352	9.764	13.079	9.964	9.609	12.801	9.584	9.428	12.517	-2.45	-4.02	-0.19	12.889	17
	6345	79	8.355	9.388	11.913	8.792	9.328	12.079	8.527	9.568	12.089	-2.45	-4.02	-0.19	11.899	17
UNII7	6665	143	10.076	9.929	13.014	8.906	9.123	12.027	8.886	8.660	11.785	-3.96	-5.08	-1.49	11.524	17

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	6.623	7.374	10.025	6.747	7.014	9.893	5.892	6.500	9.217	-2.45	-4.02	-0.19	9.835	17
	6185	47	7.527	7.127	10.342	7.003	6.817	9.921	6.574	6.626	9.610	-2.45	-4.02	-0.19	10.152	17
	6345	79	5.409	6.353	8.917	5.567	6.546	9.094	6.044	6.769	9.432	-2.45	-4.02	-0.19	9.242	17
UNII7	6665	143	6.511	6.962	9.753	6.479	6.160	9.333	6.037	5.880	8.970	-3.96	-5.08	-1.49	8.263	17

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	3.972	4.388	7.195	3.654	3.985	6.833	3.162	3.883	6.548	-2.45	-4.02	-0.19	7.005	17
	6185	47	4.670	4.307	7.503	4.099	4.151	7.136	3.974	4.015	7.005	-2.45	-4.02	-0.19	7.313	17
	6345	79	2.612	3.957	6.347	3.174	3.858	6.540	3.227	4.126	6.710	-2.45	-4.02	-0.19	6.520	17
UNII7	6665	143	4.241	4.090	7.177	3.686	3.513	6.611	3.202	3.375	6.300	-3.96	-5.08	-1.49	5.687	17

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	2.367	2.660	5.526	2.325	2.708	5.531	1.952	2.280	5.130	-2.45	-4.02	-0.19	5.341	17
	6185	47	3.392	2.630	6.038	2.904	2.491	5.713	2.820	2.999	5.921	-2.45	-4.02	-0.19	5.848	17
	6345	79	1.283	2.076	4.708	1.227	2.046	4.666	1.501	2.511	5.046	-2.45	-4.02	-0.19	4.856	17
UNII7	6665	143	2.507	2.470	5.499	2.243	2.120	5.192	1.875	1.852	4.874	-3.96	-5.08	-1.49	4.009	17

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-1.426	-0.885	1.864	-	-	-	-1.790	-1.263	1.492	-2.45	-4.02	-0.19	1.674	17
	6185	47	-0.776	-1.296	1.982	-	-	-	-0.850	-1.413	1.888	-2.45	-4.02	-0.19	1.792	17
	6345	79	-2.704	-1.844	0.758	-	-	-	-2.337	-1.476	1.125	-2.45	-4.02	-0.19	0.935	17
UNII7	6665	143	-1.506	-1.542	1.487	-	-	-	-1.552	-2.088	1.199	-3.96	-5.08	-1.49	-0.003	17

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-4.733	-3.670	-1.158	-	-	-	-2.45	-4.02	-0.19	-1.348	17
	6185	47	-	-	-	-3.769	-4.165	-0.952	-	-	-	-2.45	-4.02	-0.19	-1.142	17
	6345	79	-	-	-	-5.359	-4.594	-1.949	-	-	-	-2.45	-4.02	-0.19	-2.139	17
UNII7	6665	143	-	-	-	-4.528	-4.504	-1.505	-	-	-	-3.96	-5.08	-1.49	-2.995	17

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-9.115	-8.205	-5.626	-	-	-	-2.45	-4.02	-0.19	-5.816	17
	6185	47	-	-	-	-8.428	-8.947	-5.669	-	-	-	-2.45	-4.02	-0.19	-5.859	17
	6345	79	-	-	-	-9.940	-9.186	-6.536	-	-	-	-2.45	-4.02	-0.19	-6.726	17
UNII7	6665	143	-	-	-	-8.919	-8.910	-5.904	-	-	-	-3.96	-5.08	-1.49	-7.394	17

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-8.456	-7.511	-4.948	-	-	-	-2.45	-4.02	-0.19	-5.138	17
	6185	47	-	-	-	-7.914	-8.278	-5.082	-	-	-	-2.45	-4.02	-0.19	-5.272	17
	6345	79	-	-	-	-9.634	-8.690	-6.126	-	-	-	-2.45	-4.02	-0.19	-6.316	17
UNII7	6665	143	-	-	-	-8.409	-8.526	-5.457	-	-	-	-3.96	-5.08	-1.49	-6.947	17

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	8.671	9.735	12.246	9.422	9.701	12.574	9.587	9.969	12.793	-2.45	-4.02	-0.19	12.603	17
	6265	63	8.708	9.015	11.875	9.238	8.888	12.077	9.438	10.125	12.805	-2.45	-4.02	-0.19	12.615	17
UNII5 52T	6105	31	6.739	6.850	9.805	6.884	7.549	10.240	6.976	7.719	10.374	-2.45	-4.02	-0.19	10.184	17
	6265	63	5.981	6.439	9.227	6.164	6.565	9.380	6.740	7.103	9.936	-2.45	-4.02	-0.19	9.746	17
UNII5 106T	6105	31	3.451	4.064	6.779	4.016	4.139	7.088	4.004	4.602	7.324	-2.45	-4.02	-0.19	7.134	17
	6265	63	3.206	3.634	6.436	3.429	3.359	6.405	4.083	3.718	6.915	-2.45	-4.02	-0.19	6.725	17
UNII5 242T	6105	31	2.081	2.694	5.408	2.440	3.034	5.757	2.819	2.962	5.901	-2.45	-4.02	-0.19	5.711	17
	6265	63	1.994	2.176	5.096	2.378	2.207	5.303	2.562	2.726	5.655	-2.45	-4.02	-0.19	5.465	17
UNII5 484T	6105	31	-1.530	-1.157	1.670	-	-	-	-1.259	-1.124	1.819	-2.45	-4.02	-0.19	1.629	17
	6265	63	-2.082	-1.429	1.267	-	-	-	-1.628	-1.555	1.419	-2.45	-4.02	-0.19	1.229	17
UNII5 996T	6105	31	-	-	-	-4.347	-4.033	-1.176	-	-	-	-2.45	-4.02	-0.19	-1.366	17
	6265	63	-	-	-	-4.759	-4.744	-1.741	-	-	-	-2.45	-4.02	-0.19	-1.931	17

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	9.291	9.272	12.292	9.304	9.028	12.179	9.007	9.337	12.185	-2.45	-4.02	-0.19	12.102	17
26T	6265	63	9.073	9.252	12.174	9.301	9.576	12.451	9.112	9.230	12.182	-2.45	-4.02	-0.19	12.261	17
UNII5	6105	31	6.607	7.134	9.889	7.240	6.917	10.092	6.782	7.040	9.923	-2.45	-4.02	-0.19	9.902	17
52T	6265	63	6.682	7.248	9.985	6.871	6.727	9.810	6.403	7.370	9.924	-2.45	-4.02	-0.19	9.795	17
UNII5	6105	31	3.840	4.334	7.104	3.796	3.630	6.724	3.578	3.548	6.573	-2.45	-4.02	-0.19	6.914	17
106T	6265	63	3.809	3.875	6.852	3.625	4.021	6.838	3.675	4.034	6.869	-2.45	-4.02	-0.19	6.679	17
UNII5	6105	31	2.478	2.861	5.684	2.766	2.803	5.795	2.509	2.429	5.479	-2.45	-4.02	-0.19	5.605	17
242T	6265	63	2.732	3.112	5.936	2.815	2.905	5.870	2.389	2.473	5.441	-2.45	-4.02	-0.19	5.746	17
UNII5	6105	31	-1.126	-1.117	1.888	-	-	-	-1.485	-1.582	1.477	-2.45	-4.02	-0.19	1.698	17
484T	6265	63	-0.978	-0.772	2.136	-	-	-	-1.673	-1.185	1.588	-2.45	-4.02	-0.19	1.946	17
UNII5	6105	31	-	-	-	-4.322	-4.233	-1.267	-	-	-	-2.45	-4.02	-0.19	-1.457	17
996T	6265	63	-	-	-	-4.234	-4.154	-1.183	-	-	-	-2.45	-4.02	-0.19	-1.373	17

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	9.023	9.706	12.388	8.980	9.826	12.434	9.268	9.207	12.248	-2.45	-4.02	-0.19	12.244	17
26T	6265	63	9.079	9.723	12.423	8.765	9.409	12.109	8.241	9.308	11.818	-2.45	-4.02	-0.19	12.233	17
UNII5	6105	31	6.498	6.486	9.503	6.608	6.823	9.727	6.935	6.447	9.708	-2.45	-4.02	-0.19	9.537	17
52T	6265	63	6.566	6.878	9.735	6.425	6.714	9.582	6.006	6.531	9.287	-2.45	-4.02	-0.19	9.545	17
UNII5	6105	31	3.861	3.720	6.801	3.735	3.731	6.743	3.784	3.631	6.719	-2.45	-4.02	-0.19	6.611	17
106T	6265	63	3.423	4.021	6.743	3.430	4.250	6.870	2.767	3.439	6.126	-2.45	-4.02	-0.19	6.680	17
UNII5	6105	31	2.178	2.463	5.333	2.318	2.388	5.363	2.488	2.482	5.495	-2.45	-4.02	-0.19	5.305	17
242T	6265	63	2.300	2.525	5.424	2.004	2.454	5.245	2.008	2.554	5.300	-2.45	-4.02	-0.19	5.234	17
UNII5	6105	31	-1.697	-1.496	1.415	-	-	-	-1.120	-1.063	1.919	-2.45	-4.02	-0.19	1.729	17
484T	6265	63	-1.941	-1.169	1.472	-	-	-	-2.065	-1.372	1.305	-2.45	-4.02	-0.19	1.282	17
UNII5	6105	31	-	-	-	-4.252	-4.037	-1.132	-	-	-	-2.45	-4.02	-0.19	-1.322	17
996T	6265	63	-	-	-	-4.640	-3.696	-1.132	-	-	-	-2.45	-4.02	-0.19	-1.322	17

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	9.883	9.591	12.750	8.752	9.647	12.233	9.102	9.195	12.159	-2.45	-4.02	-0.19	12.560	17
	6265	63	8.194	8.854	11.547	7.888	9.223	11.617	8.149	9.318	11.783	-2.45	-4.02	-0.19	11.593	17
UNII5 52T	6105	31	6.953	7.517	10.255	6.551	7.169	9.882	6.144	6.611	9.394	-2.45	-4.02	-0.19	10.065	17
	6265	63	6.012	6.757	9.411	5.865	6.810	9.374	6.174	7.369	9.823	-2.45	-4.02	-0.19	9.633	17
UNII5 106T	6105	31	4.090	4.189	7.150	3.853	4.387	7.139	3.600	3.997	6.813	-2.45	-4.02	-0.19	6.960	17
	6265	63	3.292	3.792	6.560	2.911	4.214	6.622	3.169	4.344	6.806	-2.45	-4.02	-0.19	6.616	17
UNII5 242T	6105	31	2.691	2.751	5.731	2.760	2.939	5.860	2.089	3.000	5.578	-2.45	-4.02	-0.19	5.670	17
	6265	63	1.347	2.588	5.022	1.664	2.370	5.041	1.883	2.898	5.430	-2.45	-4.02	-0.19	5.240	17
UNII5 484T	6105	31	-1.336	-1.146	1.770	-	-	-	-1.276	-1.039	1.854	-2.45	-4.02	-0.19	1.664	17
	6265	63	-2.635	-1.069	1.228	-	-	-	-2.151	-1.344	1.281	-2.45	-4.02	-0.19	1.091	17
UNII5 996T	6105	31	-	-	-	-4.317	-3.879	-1.082	-	-	-	-2.45	-4.02	-0.19	-1.272	17
	6265	63	-	-	-	-5.432	-4.363	-1.854	-	-	-	-2.45	-4.02	-0.19	-2.044	17

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-	-	-	-7.737	-7.901	-4.808	-	-	-	-2.45	-4.02	-0.19	-4.998	17
160L	6265	63	-	-	-	-7.977	-7.728	-4.841	-	-	-	-2.45	-4.02	-0.19	-5.031	17
UNII5	6105	31	-	-	-	-7.605	-7.031	-4.298	-	-	-	-2.45	-4.02	-0.19	-4.488	17
160U	6265	63	-	-	-	-7.847	-7.045	-4.417	-	-	-	-2.45	-4.02	-0.19	-4.607	17

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 4x996T	6105	31	-	-	-	-10.591	-9.758	-7.145	-	-	-	-2.45	-4.02	-0.19	-7.335	17
	6265	63	-	-	-	-10.982	-10.177	-7.551	-	-	-	-2.45	-4.02	-0.19	-7.741	17
UNII5 SU	6105	31	-	-	-	-10.114	-9.881	-6.986	-	-	-	-2.45	-4.02	-0.19	-7.176	17
	6265	63	-	-	-	-10.229	-9.473	-6.825	-	-	-	-2.45	-4.02	-0.19	-7.015	17

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-4.007	2.375	3.275	-	-	-	-2.45	-4.02	-0.19	3.085	17
	6175	45	-	-	-	4.194	3.167	6.722	-	-	-	-2.45	-4.02	-0.19	6.532	17
	6415	93	-	-	-	2.893	3.175	6.047	-	-	-	-2.45	-4.02	-0.19	5.857	17
UNII7	6535	117	-	-	-	2.832	2.688	5.771	-	-	-	-3.96	-5.08	-1.49	4.281	17
	6695	149	-	-	-	3.747	3.152	6.470	-	-	-	-3.96	-5.08	-1.49	4.980	17
	6855	181	-	-	-	4.027	3.424	6.747	-	-	-	-3.96	-5.08	-1.49	5.257	17

[MRU]

Mode : EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-5.158	-6.361	-2.708	-5.248	-6.707	-2.906	-5.042	-6.628	-2.753	-2.45	-4.02	-0.19	-2.898	17
	6175	45	6.781	6.233	9.526	6.715	6.196	9.474	6.773	6.496	9.647	-2.45	-4.02	-0.19	9.457	17
	6415	93	5.572	6.246	8.932	5.348	6.127	8.765	5.594	6.361	9.005	-2.45	-4.02	-0.19	8.815	17
UNII7	6535	117	5.516	5.861	8.702	5.347	6.043	8.719	5.647	5.964	8.819	-3.96	-5.08	-1.49	7.329	17
	6695	149	6.722	6.494	9.620	6.371	6.273	9.333	6.428	6.235	9.343	-3.96	-5.08	-1.49	8.130	17
	6855	181	6.860	5.934	9.432	6.551	5.977	9.284	6.812	6.142	9.500	-3.96	-5.08	-1.49	8.010	17

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-4.459	-6.582	-2.381	-	-	-	-4.761	-6.480	-2.525	-2.45	-4.02	-0.19	-2.571	17
	6165	43	4.669	4.185	7.444	-	-	-	4.565	4.302	7.446	-2.45	-4.02	-0.19	7.256	17
	6405	91	3.451	4.129	6.814	-	-	-	3.557	3.996	6.793	-2.45	-4.02	-0.19	6.624	17
UNII7	6565	123	3.215	3.948	6.608	-	-	-	3.330	3.801	6.583	-3.96	-5.08	-1.49	5.118	17
	6685	147	4.278	4.233	7.266	-	-	-	4.233	4.108	7.182	-3.96	-5.08	-1.49	5.776	17
	6845	179	4.562	4.035	7.317	-	-	-	4.348	4.136	7.254	-3.96	-5.08	-1.49	5.827	17

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	6.572	5.800	9.213	6.330	5.561	8.973	6.575	5.892	9.257	-2.45	-4.02	-0.19	9.067	17
	6165	43	7.050	6.326	9.713	6.807	6.205	9.527	6.689	6.455	9.584	-2.45	-4.02	-0.19	9.523	17
	6405	91	5.565	6.116	8.860	5.592	6.186	8.909	5.815	6.102	8.971	-2.45	-4.02	-0.19	8.781	17
UNII7	6565	123	5.693	5.974	8.846	5.571	5.803	8.699	5.566	6.063	8.832	-3.96	-5.08	-1.49	7.356	17
	6685	147	6.472	6.371	9.432	6.407	6.440	9.434	6.700	6.281	9.506	-3.96	-5.08	-1.49	8.016	17
	6845	179	6.638	6.038	9.359	6.483	6.294	9.400	6.587	6.039	9.332	-3.96	-5.08	-1.49	7.910	17

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	4.088	3.356	6.748	3.853	3.102	6.504	4.216	3.385	6.831	-2.45	-4.02	-0.19	6.641	17
	6165	43	4.549	4.171	7.375	4.567	3.881	7.248	4.510	4.246	7.391	-2.45	-4.02	-0.19	7.201	17
	6405	91	3.706	3.976	6.854	3.281	3.904	6.614	3.363	3.931	6.667	-2.45	-4.02	-0.19	6.664	17
UNII7	6565	123	3.365	3.983	6.696	3.336	3.787	6.578	3.452	3.685	6.581	-3.96	-5.08	-1.49	5.206	17
	6685	147	4.396	4.106	7.264	4.239	3.944	7.105	4.420	4.219	7.331	-3.96	-5.08	-1.49	5.841	17
	6845	179	4.422	3.925	7.191	4.429	3.824	7.148	4.347	3.905	7.142	-3.96	-5.08	-1.49	5.701	17

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	6.422	5.848	9.155	6.633	5.833	9.262	7.052	6.056	9.593	-2.45	-4.02	-0.19	9.403	17
	6145	39	6.860	6.539	9.713	6.844	6.272	9.578	6.577	6.261	9.432	-2.45	-4.02	-0.19	9.523	17
	6385	87	5.997	6.321	9.173	5.815	6.050	8.945	5.720	6.368	9.067	-2.45	-4.02	-0.19	8.983	17
UNII7	6625	135	6.415	6.093	9.268	6.087	6.081	9.095	6.284	6.117	9.212	-3.96	-5.08	-1.49	7.778	17
	6705	151	6.779	6.515	9.660	6.423	6.381	9.413	6.300	6.407	9.364	-3.96	-5.08	-1.49	8.170	17
	6785	167	6.453	6.330	9.402	6.368	6.242	9.316	6.242	6.189	9.226	-3.96	-5.08	-1.49	7.912	17

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	4.308	3.702	7.026	4.369	3.726	7.070	4.623	3.726	7.208	-2.45	-4.02	-0.19	7.018	17
	6145	39	4.621	4.388	7.517	4.510	3.979	7.263	4.373	4.128	7.263	-2.45	-4.02	-0.19	7.327	17
	6385	87	3.561	4.229	6.918	3.535	4.102	6.838	3.696	4.219	6.976	-2.45	-4.02	-0.19	6.786	17
UNII7	6625	135	3.852	3.782	6.828	4.001	3.529	6.782	3.920	3.850	6.896	-3.96	-5.08	-1.49	5.406	17
	6705	151	4.438	4.260	7.360	4.129	4.109	7.130	4.340	4.066	7.216	-3.96	-5.08	-1.49	5.870	17
	6785	167	4.202	4.073	7.148	4.571	4.852	7.724	4.262	4.537	7.412	-3.96	-5.08	-1.49	6.234	17

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-1.498	-2.357	1.104	-1.661	-2.467	0.965	-1.865	-2.454	0.861	-2.45	-4.02	-0.19	0.914	17
	6145	39	-1.767	-1.727	1.263	-1.569	-1.690	1.381	-1.512	-2.001	1.261	-2.45	-4.02	-0.19	1.191	17
	6385	87	-2.443	-2.079	0.753	-2.269	-2.009	0.873	-2.603	-2.142	0.644	-2.45	-4.02	-0.19	0.683	17
UNII7	6625	135	-2.414	-2.240	0.684	-1.996	-2.162	0.932	-2.456	-2.368	0.598	-3.96	-5.08	-1.49	-0.558	17
	6705	151	-1.882	-2.137	1.003	-1.623	-1.902	1.250	-1.595	-2.049	1.194	-3.96	-5.08	-1.49	-0.240	17
	6785	167	-1.863	-2.113	1.024	-1.787	-2.029	1.104	-1.645	-1.934	1.223	-3.96	-5.08	-1.49	-0.267	17

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	5.160	5.791	8.497	5.309	5.904	8.627	5.314	5.565	8.452	-2.45	-4.02	-0.19	8.437	17
	6185	47	5.386	5.020	8.217	5.215	4.740	7.994	5.658	5.213	8.452	-2.45	-4.02	-0.19	8.262	17
	6345	79	4.771	4.771	7.781	4.764	4.685	7.735	4.444	4.896	7.686	-2.45	-4.02	-0.19	7.591	17
UNII7	6665	143	5.519	5.456	8.498	5.325	5.265	8.305	5.759	5.487	8.635	-3.96	-5.08	-1.49	7.145	17

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	3.292	3.722	6.523	3.414	3.835	6.640	3.352	3.414	6.394	-2.45	-4.02	-0.19	6.450	17
	6185	47	3.391	2.744	6.090	3.360	2.813	6.106	3.831	3.276	6.573	-2.45	-4.02	-0.19	6.383	17
	6345	79	3.293	2.873	6.099	2.677	2.669	5.684	2.470	2.817	5.658	-2.45	-4.02	-0.19	5.909	17
UNII7	6665	143	3.255	2.984	6.132	3.367	3.445	6.417	3.643	3.375	6.522	-3.96	-5.08	-1.49	5.032	17

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-2.597	-2.105	0.666	-2.900	-2.407	0.364	-2.724	-2.534	0.382	-2.45	-4.02	-0.19	0.476	17
	6185	47	-2.539	-3.421	0.052	-2.384	-3.082	0.291	-2.563	-3.330	0.080	-2.45	-4.02	-0.19	0.101	17
	6345	79	-3.739	-3.388	-0.550	-3.810	-3.389	-0.584	-3.684	-3.316	-0.486	-2.45	-4.02	-0.19	-0.676	17
UNII7	6665	143	-2.678	-3.050	0.150	-2.821	-3.004	0.099	-2.975	-2.959	0.043	-3.96	-5.08	-1.49	-1.340	17

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	5.382	5.989	8.706	5.338	5.320	8.339	4.736	4.901	7.830	-2.45	-4.02	-0.19	8.516	17
	6185	47	5.864	5.298	8.601	5.709	4.996	8.377	5.264	4.972	8.131	-2.45	-4.02	-0.19	8.411	17
	6345	79	4.398	4.845	7.638	4.369	5.304	7.872	4.806	5.508	8.181	-2.45	-4.02	-0.19	7.991	17
UNII7	6665	143	5.404	5.559	8.493	4.991	4.714	7.865	4.630	4.485	7.568	-3.96	-5.08	-1.49	7.003	17

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	3.485	3.612	6.560	2.705	3.060	5.897	2.469	2.860	5.680	-2.45	-4.02	-0.19	6.370	17
	6185	47	3.872	3.225	6.571	3.957	3.504	6.747	3.079	3.065	6.083	-2.45	-4.02	-0.19	6.557	17
	6345	79	2.098	2.582	5.357	2.380	2.586	5.495	2.565	3.157	5.882	-2.45	-4.02	-0.19	5.692	17
UNII7	6665	143	3.693	3.136	6.434	3.063	2.592	5.845	2.674	2.134	5.423	-3.96	-5.08	-1.49	4.944	17

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-2.795	-2.566	0.331	-2.848	-2.446	0.368	-2.931	-2.920	0.085	-2.45	-4.02	-0.19	0.178	17
	6185	47	-2.538	-2.804	0.341	-2.300	-2.509	0.607	-2.425	-2.688	0.456	-2.45	-4.02	-0.19	0.417	17
	6345	79	-3.623	-3.075	-0.330	-3.678	-3.167	-0.405	-3.765	-3.163	-0.444	-2.45	-4.02	-0.19	-0.520	17
UNII7	6665	143	-3.147	-3.390	-0.257	-2.501	-3.404	0.081	-2.794	-3.180	0.027	-3.96	-5.08	-1.49	-1.409	17

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-5.756	-5.314	-2.519	-5.815	-5.163	-2.467	-5.885	-5.466	-2.661	-2.45	-4.02	-0.19	-2.657	17
	6185	47	-5.493	-5.842	-2.654	-5.499	-5.947	-2.707	-5.396	-5.975	-2.666	-2.45	-4.02	-0.19	-2.844	17
	6345	79	-6.776	-6.372	-3.559	-6.798	-6.092	-3.421	-6.806	-6.128	-3.444	-2.45	-4.02	-0.19	-3.611	17
UNII7	6665	143	-5.648	-6.115	-2.865	-5.496	-6.100	-2.778	-5.779	-6.015	-2.885	-3.96	-5.08	-1.49	-4.268	17

Mode : EHT160 MRU 996T+484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-6.226	-5.067	-2.598	-6.798	-5.097	-2.855	-6.591	-5.025	-2.728	-2.45	-4.02	-0.19	-2.788	17
	6185	47	-6.060	-5.781	-2.908	-6.289	-5.786	-3.020	-6.101	-6.030	-3.055	-2.45	-4.02	-0.19	-3.098	17
	6345	79	-7.597	-6.199	-3.832	-7.810	-6.154	-3.893	-7.783	-6.282	-3.958	-2.45	-4.02	-0.19	-4.022	17
UNII7	6665	143	-6.488	-5.945	-3.198	-6.568	-6.039	-3.285	-6.518	-5.973	-3.227	-3.96	-5.08	-1.49	-4.688	17

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	5.216	5.568	8.406	5.342	5.645	8.506	5.703	5.654	8.689	-2.45	-4.02	-0.19	8.499	17
	6265	63	4.757	4.936	7.858	4.916	4.698	7.819	5.374	5.298	8.346	-2.45	-4.02	-0.19	8.156	17
UNII5 106T+26T	6105	31	3.204	3.332	6.279	3.054	3.356	6.218	3.615	3.500	6.568	-2.45	-4.02	-0.19	6.378	17
	6265	63	2.947	2.837	5.903	3.129	2.684	5.923	3.455	3.064	6.274	-2.45	-4.02	-0.19	6.084	17
UNII5 484T+242T	6105	31	-2.492	-2.701	0.415	-2.789	-2.632	0.301	-2.766	-2.728	0.264	-2.45	-4.02	-0.19	0.225	17
	6265	63	-2.963	-3.042	0.008	-2.942	-3.256	-0.086	-3.163	-3.263	-0.202	-2.45	-4.02	-0.19	-0.182	17

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	5.209	5.345	8.288	5.281	5.142	8.222	4.679	4.587	7.643	-2.45	-4.02	-0.19	8.098	17
	6265	63	5.380	5.381	8.391	5.390	5.866	8.645	5.274	5.221	8.258	-2.45	-4.02	-0.19	8.455	17
UNII5 106T+26T	6105	31	3.233	3.411	6.333	3.230	2.840	6.050	2.979	3.095	6.048	-2.45	-4.02	-0.19	6.143	17
	6265	63	3.658	3.205	6.448	3.620	3.551	6.596	3.400	3.133	6.279	-2.45	-4.02	-0.19	6.406	17
UNII5 484T+242T	6105	31	-2.685	-3.177	0.086	-2.720	-2.747	0.277	-2.651	-3.085	0.148	-2.45	-4.02	-0.19	0.087	17
	6265	63	-3.093	-2.834	0.049	-3.001	-2.847	0.087	-2.930	-2.639	0.228	-2.45	-4.02	-0.19	0.038	17

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 52T+26T	6105	31	5.310	4.990	8.163	5.349	4.677	8.036	5.230	5.430	8.341	-2.45	-4.02	-0.19	8.151	17
	6265	63	4.938	5.005	7.982	4.549	4.625	7.597	4.266	5.184	7.759	-2.45	-4.02	-0.19	7.792	17
UNII5 106T+26T	6105	31	3.186	2.994	6.102	3.217	2.805	6.026	3.333	3.159	6.257	-2.45	-4.02	-0.19	6.067	17
	6265	63	2.925	3.294	6.124	2.553	2.977	5.781	2.723	2.751	5.748	-2.45	-4.02	-0.19	5.934	17
UNII5 484T+242T	6105	31	-2.882	-2.913	0.113	-2.639	-2.795	0.294	-3.092	-2.950	-0.010	-2.45	-4.02	-0.19	0.104	17
	6265	63	-3.096	-2.256	0.355	-3.128	-2.381	0.272	-3.081	-2.606	0.174	-2.45	-4.02	-0.19	0.165	17

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	5.904	5.396	8.668	5.434	5.280	8.368	4.866	5.088	7.989	-2.45	-4.02	-0.19	8.478	17
	6265	63	4.615	5.005	7.825	4.355	4.883	7.637	4.444	5.565	8.051	-2.45	-4.02	-0.19	7.861	17
UNII5 106T+26T	6105	31	3.372	3.274	6.334	3.095	3.072	6.094	3.150	2.981	6.077	-2.45	-4.02	-0.19	6.144	17
	6265	63	2.414	2.910	5.680	2.319	3.116	5.746	2.897	3.105	6.013	-2.45	-4.02	-0.19	5.823	17
UNII5 484T+242T	6105	31	-2.909	-2.208	0.466	-2.841	-2.698	0.242	-2.828	-2.843	0.175	-2.45	-4.02	-0.19	0.276	17
	6265	63	-3.613	-2.813	-0.184	-3.650	-2.770	-0.177	-3.845	-3.073	-0.431	-2.45	-4.02	-0.19	-0.367	17

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 160L	6105	31	-5.604	-5.808	-2.695	-5.421	-5.667	-2.532	-5.335	-5.713	-2.510	-2.45	-4.02	-0.19	-2.700	17
	6265	63	-5.555	-5.127	-2.326	-5.336	-5.390	-2.353	-5.225	-5.676	-2.435	-2.45	-4.02	-0.19	-2.516	17
UNII5 160U	6105	31	-5.732	-5.710	-2.711	-5.378	-4.430	-1.868	-5.229	-5.231	-2.220	-2.45	-4.02	-0.19	-2.058	17
	6265	63	-6.188	-5.522	-2.832	-5.455	-4.737	-2.071	-5.645	-5.324	-2.471	-2.45	-4.02	-0.19	-2.261	17

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO					
UNII5 3x996T	6105	31	-9.562	-9.297	-6.417	-9.265	-9.263	-6.254	-9.547	-9.598	-6.562	-2.45	-4.02	-0.19	-6.444	17
	6265	63	-9.370	-9.176	-6.262	-9.373	-9.136	-6.243	-9.578	-9.556	-6.557	-2.45	-4.02	-0.19	-6.433	17
UNII5 2x996T+484T	6105	31	-8.610	-8.797	-5.692	-8.511	-8.710	-5.599	-8.564	-8.508	-5.526	-2.45	-4.02	-0.19	-5.716	17
	6265	63	-8.402	-8.553	-5.467	-8.449	-8.529	-5.479	-8.704	-8.228	-5.449	-2.45	-4.02	-0.19	-5.639	17
UNII5 3x996T+484T	6105	31	-10.001	-9.993	-6.986	-9.868	-10.034	-6.940	-9.986	-10.160	-7.062	-2.45	-4.02	-0.19	-7.130	17
	6265	63	-9.788	-9.939	-6.852	-9.829	-9.903	-6.855	-10.019	-9.707	-6.850	-2.45	-4.02	-0.19	-7.040	17

10.4.3 Very Low Power Device

Very Low Power Device Limit : -5 dBm/MHz(e.i.r.p)

(MIMO_CDD(Ant1+Ant2))

- ANT1 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- ANT2 Max. PSD (dBm/MHz) : Measured Conducted PSD(dBm/MHz) + Duty Factor (dB)
- MIMO Max. PSD (dBm/MHz) = ANT1 Max. PSD(dBm/MHz) + ANT1 Max. PSD(dBm/MHz)
- EIRP PSD (dBm /MHz) = MIMO Max. PSD (ANT1 + ANT2) (dBm/MHz) + Directional Gain (dBi)

-Note:

1. The MIMO_CDD(Ant1+Ant2) formula on page 8 and the maximum gain of each band in the antenna gain table were applied.

10.4.3.1 MIMO_CDD(Ant1+Ant2)

[SRU]

Mode : EHT20 26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-6.662	-9.682	-4.904	-8.149	-10.447	-6.137	-7.043	-9.252	-4.998	-2.45	-4.02	-0.19	-5.094	-5
	6175	45	-7.064	-10.297	-5.376	-8.706	-11.656	-6.925	-7.261	-10.178	-5.469	-2.45	-4.02	-0.19	-5.566	-5
	6415	93	-7.843	-9.251	-5.480	-9.164	-10.488	-6.765	-7.598	-8.883	-5.183	-2.45	-4.02	-0.19	-5.373	-5
UNII7	6535	117	-7.108	-7.938	-4.493	-8.854	-9.400	-6.108	-7.242	-8.217	-4.692	-3.96	-5.08	-1.49	-5.983	-5
	6695	149	-6.484	-6.801	-3.629	-7.886	-8.794	-5.306	-6.483	-6.821	-3.638	-3.96	-5.08	-1.49	-5.119	-5
	6855	181	-6.901	-8.966	-4.801	-8.491	-10.236	-6.266	-7.062	-8.668	-4.781	-3.96	-5.08	-1.49	-6.271	-5
Mode : EHT20 52T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-7.035	-9.387	-5.043	-7.146	-9.599	-5.191	-7.025	-9.432	-5.053	-2.45	-4.02	-0.19	-5.233	-5
	6175	45	-6.780	-10.444	-5.226	-7.069	-10.654	-5.491	-6.828	-10.286	-5.211	-2.45	-4.02	-0.19	-5.401	-5
	6415	93	-7.966	-9.260	-5.554	-7.942	-9.403	-5.601	-7.702	-9.195	-5.374	-2.45	-4.02	-0.19	-5.564	-5
UNII7	6535	117	-7.171	-7.527	-4.335	-7.408	-7.994	-4.681	-7.143	-7.836	-4.465	-3.96	-5.08	-1.49	-5.825	-5
	6695	149	-7.102	-7.862	-4.455	-7.245	-8.017	-4.603	-7.185	-8.014	-4.569	-3.96	-5.08	-1.49	-5.945	-5
	6855	181	-7.035	-9.116	-4.942	-7.130	-9.562	-5.167	-7.208	-9.131	-5.053	-3.96	-5.08	-1.49	-6.432	-5
Mode : EHT20 106T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-7.356	-8.945	-5.068	-	-	-	-7.505	-8.859	-5.119	-2.45	-4.02	-0.19	-5.258	-5
	6175	45	-6.907	-10.162	-5.226	-	-	-	-6.748	-9.959	-5.053	-2.45	-4.02	-0.19	-5.243	-5
	6415	93	-8.424	-8.212	-5.306	-	-	-	-8.429	-8.125	-5.264	-2.45	-4.02	-0.19	-5.454	-5
UNII7	6535	117	-8.028	-7.713	-4.857	-	-	-	-7.968	-8.185	-5.064	-3.96	-5.08	-1.49	-6.347	-5
	6695	149	-7.140	-7.463	-4.288	-	-	-	-7.115	-7.547	-4.315	-3.96	-5.08	-1.49	-5.778	-5
	6855	181	-6.735	-7.376	-4.033	-	-	-	-6.909	-7.260	-4.070	-3.96	-5.08	-1.49	-5.523	-5
Mode : EHT20 242T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-8.953	-10.149	-6.499	-	-	-	-2.45	-4.02	-0.19	-6.689	-5
	6175	45	-	-	-	-8.504	-9.117	-5.789	-	-	-	-2.45	-4.02	-0.19	-5.979	-5
	6415	93	-	-	-	-9.599	-9.076	-6.319	-	-	-	-2.45	-4.02	-0.19	-6.509	-5
UNII7	6535	117	-	-	-	-7.254	-7.373	-4.303	-	-	-	-3.96	-5.08	-1.49	-5.793	-5
	6695	149	-	-	-	-6.366	-6.982	-3.653	-	-	-	-3.96	-5.08	-1.49	-5.143	-5
	6855	181	-	-	-	-6.031	-7.098	-3.521	-	-	-	-3.96	-5.08	-1.49	-5.011	-5

Mode : EHT20 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-	-	-	-8.842	-9.890	-6.324	-	-	-	-2.45	-4.02	-0.19	-6.514	-5
	6175	45	-	-	-	-8.164	-9.123	-5.607	-	-	-	-2.45	-4.02	-0.19	-5.797	-5
	6415	93	-	-	-	-9.401	-8.864	-6.114	-	-	-	-2.45	-4.02	-0.19	-6.304	-5
UNII7	6535	117	-	-	-	-7.604	-7.563	-4.573	-	-	-	-3.96	-5.08	-1.49	-6.063	-5
	6695	149	-	-	-	-6.751	-7.501	-4.100	-	-	-	-3.96	-5.08	-1.49	-5.590	-5
	6855	181	-	-	-	-6.690	-7.554	-4.091	-	-	-	-3.96	-5.08	-1.49	-5.581	-5

Mode : EHT40 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-7.035	-9.523	-5.093	-7.316	-9.403	-5.225	-7.029	-8.853	-4.835	-2.45	-4.02	-0.19	-5.025	-5
	6165	43	-7.027	-10.447	-5.398	-7.029	-10.323	-5.360	-6.946	-10.306	-5.298	-2.45	-4.02	-0.19	-5.488	-5
	6405	91	-7.628	-8.860	-5.190	-7.756	-8.909	-5.284	-7.588	-8.940	-5.201	-2.45	-4.02	-0.19	-5.380	-5
UNII7	6565	123	-7.123	-8.130	-4.587	-7.139	-8.430	-4.726	-7.067	-8.261	-4.613	-3.96	-5.08	-1.49	-6.077	-5
	6685	147	-6.475	-7.683	-4.027	-6.681	-7.925	-4.248	-6.582	-7.634	-4.066	-3.96	-5.08	-1.49	-5.517	-5
	6845	179	-6.389	-8.769	-4.407	-6.996	-9.025	-4.883	-7.152	-8.876	-4.919	-3.96	-5.08	-1.49	-5.897	-5

Mode : EHT40 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-7.084	-9.328	-5.052	-7.346	-9.476	-5.271	-7.439	-8.972	-5.128	-2.45	-4.02	-0.19	-5.242	-5
	6165	43	-6.609	-10.201	-5.034	-6.779	-10.213	-5.155	-6.620	-9.915	-4.952	-2.45	-4.02	-0.19	-5.142	-5
	6405	91	-7.894	-9.066	-5.430	-7.521	-9.309	-5.313	-7.654	-9.032	-5.278	-2.45	-4.02	-0.19	-5.468	-5
UNII7	6565	123	-6.691	-7.723	-4.166	-7.005	-8.143	-4.527	-6.721	-7.959	-4.286	-3.96	-5.08	-1.49	-5.656	-5
	6685	147	-6.444	-7.576	-3.963	-6.693	-8.108	-4.333	-6.510	-8.216	-4.270	-3.96	-5.08	-1.49	-5.453	-5
	6845	179	-6.287	-8.475	-4.234	-6.701	-8.910	-4.656	-6.947	-8.530	-4.657	-3.96	-5.08	-1.49	-5.724	-5

Mode : EHT40 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-7.666	-9.329	-5.408	-7.618	-9.491	-5.444	-7.431	-9.016	-5.141	-2.45	-4.02	-0.19	-5.331	-5
	6165	43	-7.298	-10.765	-5.684	-7.253	-10.591	-5.598	-7.213	-10.536	-5.554	-2.45	-4.02	-0.19	-5.744	-5
	6405	91	-8.588	-7.816	-5.174	-8.701	-8.033	-5.344	-8.404	-7.781	-5.071	-2.45	-4.02	-0.19	-5.261	-5
UNII7	6565	123	-7.602	-7.866	-4.722	-8.044	-7.847	-4.934	-7.819	-7.733	-4.765	-3.96	-5.08	-1.49	-6.212	-5
	6685	147	-6.774	-7.174	-3.959	-7.322	-7.386	-4.343	-6.969	-7.135	-4.041	-3.96	-5.08	-1.49	-5.449	-5
	6845	179	-6.822	-7.214	-4.003	-7.100	-7.362	-4.219	-6.963	-7.162	-4.051	-3.96	-5.08	-1.49	-5.493	-5

Mode : EHT40 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-7.393	-8.917	-5.078	-	-	-	-7.303	-8.956	-5.041	-2.45	-4.02	-0.19	-5.231	-5
	6165	43	-8.367	-9.329	-5.811	-	-	-	-8.339	-9.320	-5.791	-2.45	-4.02	-0.19	-5.981	-5
	6405	91	-8.551	-8.314	-5.420	-	-	-	-8.639	-8.121	-5.362	-2.45	-4.02	-0.19	-5.552	-5
UNII7	6565	123	-7.056	-7.145	-4.090	-	-	-	-7.248	-6.933	-4.077	-3.96	-5.08	-1.49	-5.567	-5
	6685	147	-6.499	-7.338	-3.888	-	-	-	-6.747	-7.736	-4.203	-3.96	-5.08	-1.49	-5.378	-5
	6845	179	-6.361	-7.148	-3.726	-	-	-	-6.482	-7.047	-3.745	-3.96	-5.08	-1.49	-5.216	-5

Mode : EHT40 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-8.263	-9.954	-6.016	-	-	-	-2.45	-4.02	-0.19	-6.206	-5
	6165	43	-	-	-	-7.366	-8.810	-5.018	-	-	-	-2.45	-4.02	-0.19	-5.208	-5
	6405	91	-	-	-	-8.925	-8.595	-5.746	-	-	-	-2.45	-4.02	-0.19	-5.936	-5
UNII7	6565	123	-	-	-	-7.481	-7.495	-4.478	-	-	-	-3.96	-5.08	-1.49	-5.968	-5
	6685	147	-	-	-	-6.320	-6.781	-3.534	-	-	-	-3.96	-5.08	-1.49	-5.024	-5
	6845	179	-	-	-	-6.589	-6.933	-3.747	-	-	-	-3.96	-5.08	-1.49	-5.237	-5

Mode : EHT40 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5965	3	-	-	-	-8.749	-10.487	-6.521	-	-	-	-2.45	-4.02	-0.19	-6.711	-5
	6165	43	-	-	-	-7.532	-8.922	-5.161	-	-	-	-2.45	-4.02	-0.19	-5.351	-5
	6405	91	-	-	-	-9.309	-9.117	-6.202	-	-	-	-2.45	-4.02	-0.19	-6.392	-5
UNII7	6565	123	-	-	-	-7.487	-7.228	-4.345	-	-	-	-3.96	-5.08	-1.49	-5.835	-5
	6685	147	-	-	-	-6.576	-6.655	-3.605	-	-	-	-3.96	-5.08	-1.49	-5.095	-5
	6845	179	-	-	-	-6.470	-6.647	-3.547	-	-	-	-3.96	-5.08	-1.49	-5.037	-5

Mode : EHT80 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-7.350	-9.906	-5.432	-7.549	-9.305	-5.328	-7.813	-9.396	-5.522	-2.45	-4.02	-0.19	-5.518	-5
	6145	39	-7.368	-10.192	-5.544	-7.689	-9.830	-5.618	-7.673	-9.440	-5.457	-2.45	-4.02	-0.19	-5.647	-5
	6385	87	-7.831	-8.127	-4.966	-7.173	-8.930	-4.953	-7.338	-8.490	-4.865	-2.45	-4.02	-0.19	-5.055	-5
UNII7	6625	135	-7.136	-7.534	-4.320	-7.210	-7.865	-4.514	-7.092	-7.819	-4.430	-3.96	-5.08	-1.49	-5.810	-5
	6705	151	-6.812	-7.812	-4.273	-6.539	-8.581	-4.430	-6.649	-8.555	-4.488	-3.96	-5.08	-1.49	-5.763	-5
	6785	167	-6.095	-7.799	-3.853	-6.366	-8.153	-4.158	-6.876	-7.946	-4.367	-3.96	-5.08	-1.49	-5.343	-5

Mode : EHT80 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-6.954	-8.987	-4.842	-7.122	-9.169	-5.015	-7.191	-9.007	-4.994	-2.45	-4.02	-0.19	-5.032	-5
	6145	39	-6.930	-9.387	-4.976	-7.129	-9.491	-5.141	-7.392	-9.387	-5.265	-2.45	-4.02	-0.19	-5.166	-5
	6385	87	-8.131	-9.058	-5.559	-7.942	-9.287	-5.552	-8.029	-9.336	-5.623	-2.45	-4.02	-0.19	-5.742	-5
UNII7	6625	135	-7.391	-6.801	-4.075	-6.845	-7.586	-4.189	-6.668	-7.579	-4.089	-3.96	-5.08	-1.49	-5.565	-5
	6705	151	-6.434	-7.620	-3.976	-6.329	-8.219	-4.161	-6.321	-7.818	-3.995	-3.96	-5.08	-1.49	-5.466	-5
	6785	167	-6.226	-7.799	-3.931	-6.851	-8.210	-4.467	-6.780	-8.219	-4.429	-3.96	-5.08	-1.49	-5.421	-5

Mode : EHT80 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-7.876	-10.066	-5.824	-8.161	-9.944	-5.951	-8.113	-10.014	-5.950	-2.45	-4.02	-0.19	-6.014	-5
	6145	39	-7.087	-9.547	-5.135	-7.286	-9.672	-5.307	-7.060	-9.280	-5.019	-2.45	-4.02	-0.19	-5.209	-5
	6385	87	-7.240	-8.599	-4.856	-7.571	-8.477	-4.990	-7.234	-8.993	-5.015	-2.45	-4.02	-0.19	-5.046	-5
UNII7	6625	135	-7.822	-7.513	-4.654	-7.738	-7.832	-4.774	-7.576	-7.530	-4.542	-3.96	-5.08	-1.49	-6.032	-5
	6705	151	-7.000	-7.213	-4.095	-7.230	-7.555	-4.379	-7.335	-7.249	-4.281	-3.96	-5.08	-1.49	-5.585	-5
	6785	167	-7.123	-7.343	-4.221	-7.267	-7.163	-4.204	-7.593	-7.159	-4.360	-3.96	-5.08	-1.49	-5.694	-5

Mode : EHT80 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-8.361	-9.262	-5.778	-8.005	-9.255	-5.575	-8.074	-9.263	-5.617	-2.45	-4.02	-0.19	-5.765	-5
	6145	39	-8.023	-8.528	-5.258	-8.196	-8.507	-5.338	-7.852	-8.477	-5.143	-2.45	-4.02	-0.19	-5.333	-5
	6385	87	-8.863	-8.472	-5.653	-8.741	-8.512	-5.615	-8.711	-8.418	-5.552	-2.45	-4.02	-0.19	-5.742	-5
UNII7	6625	135	-6.733	-7.250	-3.973	-6.717	-7.174	-3.929	-6.501	-6.998	-3.732	-3.96	-5.08	-1.49	-5.222	-5
	6705	151	-6.170	-7.165	-3.629	-6.311	-7.124	-3.688	-6.103	-7.297	-3.649	-3.96	-5.08	-1.49	-5.119	-5
	6785	167	-6.641	-7.329	-3.961	-6.669	-7.279	-3.953	-7.000	-7.349	-4.161	-3.96	-5.08	-1.49	-5.443	-5

Mode : EHT80 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-8.132	-9.621	-5.802	-	-	-	-8.094	-9.658	-5.795	-2.45	-4.02	-0.19	-5.985	-5
	6145	39	-7.663	-8.551	-5.074	-	-	-	-7.722	-8.638	-5.145	-2.45	-4.02	-0.19	-5.264	-5
	6385	87	-8.860	-8.384	-5.605	-	-	-	-9.005	-8.766	-5.873	-2.45	-4.02	-0.19	-5.795	-5
UNII7	6625	135	-6.705	-6.808	-3.746	-	-	-	-6.550	-6.974	-3.746	-3.96	-5.08	-1.49	-5.236	-5
	6705	151	-6.942	-7.437	-4.172	-	-	-	-7.127	-7.541	-4.318	-3.96	-5.08	-1.49	-5.662	-5
	6785	167	-7.116	-7.389	-4.240	-	-	-	-7.239	-7.280	-4.249	-3.96	-5.08	-1.49	-5.730	-5

Mode : EHT80 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-	-	-	-7.596	-9.191	-5.310	-	-	-	-2.45	-4.02	-0.19	-5.500	-5
	6145	39	-	-	-	-7.969	-8.272	-5.107	-	-	-	-2.45	-4.02	-0.19	-5.297	-5
	6385	87	-	-	-	-8.964	-8.588	-5.761	-	-	-	-2.45	-4.02	-0.19	-5.951	-5
UNII7	6625	135	-	-	-	-7.445	-7.799	-4.608	-	-	-	-3.96	-5.08	-1.49	-6.098	-5
	6705	151	-	-	-	-7.121	-7.527	-4.309	-	-	-	-3.96	-5.08	-1.49	-5.799	-5
	6785	167	-	-	-	-7.256	-7.446	-4.339	-	-	-	-3.96	-5.08	-1.49	-5.829	-5

Mode : EHT80 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-	-	-	-7.548	-9.250	-5.306	-	-	-	-2.45	-4.02	-0.19	-5.496	-5
	6145	39	-	-	-	-7.761	-7.944	-4.841	-	-	-	-2.45	-4.02	-0.19	-5.031	-5
	6385	87	-	-	-	-8.683	-8.173	-5.410	-	-	-	-2.45	-4.02	-0.19	-5.600	-5
UNII7	6625	135	-	-	-	-6.845	-7.193	-4.005	-	-	-	-3.96	-5.08	-1.49	-5.495	-5
	6705	151	-	-	-	-6.627	-7.062	-3.829	-	-	-	-3.96	-5.08	-1.49	-5.319	-5
	6785	167	-	-	-	-6.561	-6.852	-3.694	-	-	-	-3.96	-5.08	-1.49	-5.184	-5

Mode : EHT160(80L) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.456	-10.716	-6.430	-7.893	-10.387	-5.953	-8.024	-9.862	-5.836	-2.45	-4.02	-0.19	-6.026	-5
	6185	47	-7.709	-11.837	-6.289	-7.075	-10.967	-5.588	-7.277	-10.470	-5.576	-2.45	-4.02	-0.19	-5.766	-5
	6345	79	-7.369	-9.676	-5.360	-7.749	-9.452	-5.507	-7.479	-9.288	-5.279	-2.45	-4.02	-0.19	-5.469	-5
UNII7	6665	143	-8.199	-8.796	-5.477	-8.131	-9.194	-5.619	-7.763	-9.413	-5.499	-3.96	-5.08	-1.49	-6.967	-5

Mode : EHT160(80L) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.866	-10.329	-5.915	-7.175	-9.770	-5.271	-6.951	-9.774	-5.127	-2.45	-4.02	-0.19	-5.317	-5
	6185	47	-7.658	-10.897	-5.972	-7.259	-11.114	-5.762	-6.981	-10.227	-5.297	-2.45	-4.02	-0.19	-5.487	-5
	6345	79	-7.235	-9.471	-5.200	-7.180	-9.220	-5.071	-6.839	-9.192	-4.848	-2.45	-4.02	-0.19	-5.038	-5
UNII7	6665	143	-8.520	-8.463	-5.481	-7.640	-8.706	-5.130	-7.368	-8.603	-4.931	-3.96	-5.08	-1.49	-6.421	-5

Mode : EHT160(80L) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.500	-8.249	-5.362	-8.109	-7.862	-4.973	-8.301	-7.964	-5.119	-2.45	-4.02	-0.19	-5.163	-5
	6185	47	-8.082	-8.732	-5.384	-7.753	-8.686	-5.184	-7.483	-8.396	-4.905	-2.45	-4.02	-0.19	-5.095	-5
	6345	79	-8.788	-8.379	-5.568	-8.715	-8.421	-5.555	-9.365	-8.563	-5.935	-2.45	-4.02	-0.19	-5.745	-5
UNII7	6665	143	-8.536	-8.352	-5.433	-8.138	-8.000	-5.058	-8.293	-8.108	-5.189	-3.96	-5.08	-1.49	-6.548	-5

Mode : EHT160(80L) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.128	-8.367	-5.235	-8.247	-8.700	-5.457	-7.881	-8.620	-5.224	-2.45	-4.02	-0.19	-5.414	-5
	6185	47	-7.901	-9.509	-5.621	-8.230	-9.600	-5.851	-7.845	-8.954	-5.354	-2.45	-4.02	-0.19	-5.544	-5
	6345	79	-7.729	-8.336	-5.011	-8.187	-8.265	-5.215	-8.194	-7.977	-5.074	-2.45	-4.02	-0.19	-5.201	-5
UNII7	6665	143	-7.350	-7.627	-4.476	-7.241	-7.436	-4.327	-7.197	-7.755	-4.457	-3.96	-5.08	-1.49	-5.817	-5

Mode : EHT160(80L) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.665	-8.542	-5.592	-	-	-	-8.438	-8.597	-5.506	-2.45	-4.02	-0.19	-5.696	-5
	6185	47	-7.932	-9.339	-5.568	-	-	-	-8.063	-8.912	-5.456	-2.45	-4.02	-0.19	-5.646	-5
	6345	79	-8.446	-8.527	-5.476	-	-	-	-8.560	-8.530	-5.534	-2.45	-4.02	-0.19	-5.666	-5
UNII7	6665	143	-7.379	-7.456	-4.407	-	-	-	-6.824	-7.163	-3.980	-3.96	-5.08	-1.49	-5.470	-5

Mode : EHT160(80L) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-	-	-	-8.097	-7.800	-4.935	-	-	-	-2.45	-4.02	-0.19	-5.125	-5
	6185	47	-	-	-	-7.796	-8.618	-5.177	-	-	-	-2.45	-4.02	-0.19	-5.367	-5
	6345	79	-	-	-	-8.888	-8.469	-5.663	-	-	-	-2.45	-4.02	-0.19	-5.853	-5
UNII7	6665	143	-	-	-	-7.159	-7.273	-4.205	-	-	-	-3.96	-5.08	-1.49	-5.695	-5

Mode : EHT160(80U) 26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6025	15	-8.050	-10.142	-5.961	-8.684	-10.061	-6.307	-8.891	-10.693	-6.689	-2.45	-4.02	-0.19	-6.151	-5
	6185	47	-7.075	-10.477	-5.440	-7.196	-10.749	-5.608	-8.312	-11.133	-6.487	-2.45	-4.02	-0.19	-5.630	-5
	6345	79	-7.496	-9.716	-5.455	-7.395	-9.095	-5.152	-6.997	-9.898	-5.199	-2.45	-4.02	-0.19	-5.342	-5
UNII7	6665	143	-8.050	-8.949	-5.466	-8.753	-9.742	-6.209	-8.650	-10.262	-6.371	-3.96	-5.08	-1.49	-6.956	-5

Mode : EHT160(80U) 52T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.801	-9.420	-5.525	-8.093	-10.334	-6.060	-8.621	-10.475	-6.439	-2.45	-4.02	-0.19	-5.715	-5
	6185	47	-7.122	-10.200	-5.383	-7.233	-10.707	-5.621	-7.777	-10.560	-5.939	-2.45	-4.02	-0.19	-5.573	-5
	6345	79	-7.659	-9.630	-5.523	-7.395	-9.706	-5.388	-6.958	-9.708	-5.108	-2.45	-4.02	-0.19	-5.298	-5
UNII7	6665	143	-7.295	-8.516	-4.852	-7.889	-9.396	-5.567	-8.226	-10.436	-6.182	-3.96	-5.08	-1.49	-6.342	-5

Mode : EHT160(80U) 106T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.156	-7.975	-5.054	-8.597	-8.690	-5.633	-9.017	-8.860	-5.927	-2.45	-4.02	-0.19	-5.244	-5
	6185	47	-8.086	-8.424	-5.241	-8.149	-8.397	-5.261	-8.508	-8.600	-5.543	-2.45	-4.02	-0.19	-5.431	-5
	6345	79	-9.287	-8.491	-5.860	-9.022	-8.159	-5.559	-8.968	-8.456	-5.694	-2.45	-4.02	-0.19	-5.749	-5
UNII7	6665	143	-8.245	-8.448	-5.335	-8.306	-8.688	-5.482	-9.103	-9.145	-6.113	-3.96	-5.08	-1.49	-6.825	-5

Mode : EHT160(80U) 242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-7.680	-8.438	-5.032	-8.027	-8.174	-5.089	-8.145	-8.680	-5.394	-2.45	-4.02	-0.19	-5.222	-5
	6185	47	-7.792	-8.956	-5.325	-7.850	-8.730	-5.257	-8.285	-9.023	-5.628	-2.45	-4.02	-0.19	-5.447	-5
	6345	79	-9.169	-9.062	-6.105	-9.379	-8.493	-5.903	-8.539	-8.355	-5.436	-2.45	-4.02	-0.19	-5.626	-5
UNII7	6665	143	-7.354	-7.897	-4.607	-7.596	-8.162	-4.859	-7.710	-8.441	-5.050	-3.96	-5.08	-1.49	-6.097	-5

Mode : EHT160(80U) 484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-8.694	-8.793	-5.733	-	-	-	-8.867	-8.951	-5.898	-2.45	-4.02	-0.19	-5.923	-5
	6185	47	-7.610	-8.934	-5.211	-	-	-	-7.789	-8.795	-5.252	-2.45	-4.02	-0.19	-5.401	-5
	6345	79	-9.162	-8.665	-5.896	-	-	-	-8.965	-8.415	-5.671	-2.45	-4.02	-0.19	-5.861	-5
UNII7	6665	143	-7.159	-7.447	-4.290	-	-	-	-7.610	-7.916	-4.750	-3.96	-5.08	-1.49	-5.780	-5

Mode : EHT160(80U) 996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-8.430	-8.517	-5.463	-	-	-	-2.45	-4.02	-0.19	-5.653	-5
	6185	47	-	-	-	-7.968	-8.462	-5.197	-	-	-	-2.45	-4.02	-0.19	-5.387	-5
	6345	79	-	-	-	-8.090	-7.634	-4.845	-	-	-	-2.45	-4.02	-0.19	-5.035	-5
UNII7	6665	143	-	-	-	-7.364	-7.509	-4.425	-	-	-	-3.96	-5.08	-1.49	-5.915	-5

Mode : EHT160 SU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-10.821	-10.496	-7.645	-	-	-	-2.45	-4.02	-0.19	-7.835	-5
	6185	47	-	-	-	-10.138	-10.817	-7.454	-	-	-	-2.45	-4.02	-0.19	-7.644	-5
	6345	79	-	-	-	-11.402	-11.069	-8.222	-	-	-	-2.45	-4.02	-0.19	-8.412	-5
UNII7	6665	143	-	-	-	-10.602	-10.934	-7.754	-	-	-	-3.96	-5.08	-1.49	-9.244	-5

Mode : EHT160 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-	-	-	-9.844	-9.555	-6.687	-	-	-	-2.45	-4.02	-0.19	-6.877	-5
	6185	47	-	-	-	-9.566	-10.388	-6.947	-	-	-	-2.45	-4.02	-0.19	-7.137	-5
	6345	79	-	-	-	-10.971	-10.632	-7.788	-	-	-	-2.45	-4.02	-0.19	-7.978	-5
UNII7	6665	143	-	-	-	-10.033	-10.293	-7.151	-	-	-	-3.96	-5.08	-1.49	-8.641	-5

Mode : EHT320(80LL)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	-7.694	-10.857	-5.983	-7.290	-10.875	-5.712	-7.192	-10.426	-5.504	-2.45	-4.02	-0.19	-5.694	-5
	6265	63	-7.680	-11.968	-6.305	-7.661	-11.478	-6.153	-7.047	-10.325	-5.373	-2.45	-4.02	-0.19	-5.563	-5
UNII5 52T	6105	31	-7.484	-10.954	-5.871	-6.719	-10.205	-5.111	-6.983	-9.494	-5.049	-2.45	-4.02	-0.19	-5.239	-5
	6265	63	-7.917	-11.996	-6.484	-7.246	-11.095	-5.747	-6.834	-10.448	-5.265	-2.45	-4.02	-0.19	-5.455	-5
UNII5 106T	6105	31	-8.128	-8.380	-5.242	-8.154	-7.958	-5.045	-7.826	-8.213	-5.005	-2.45	-4.02	-0.19	-5.195	-5
	6265	63	-8.611	-9.304	-5.933	-8.630	-9.105	-5.851	-8.017	-8.679	-5.325	-2.45	-4.02	-0.19	-5.515	-5
UNII5 242T	6105	31	-8.367	-8.790	-5.563	-8.065	-8.868	-5.438	-7.813	-8.804	-5.270	-2.45	-4.02	-0.19	-5.460	-5
	6265	63	-8.112	-9.145	-5.588	-8.471	-9.617	-5.996	-8.360	-8.927	-5.624	-2.45	-4.02	-0.19	-5.778	-5
UNII5 484T	6105	31	-8.378	-8.903	-5.623	-	-	-	-8.189	-8.657	-5.407	-2.45	-4.02	-0.19	-5.597	-5
	6265	63	-8.911	-9.471	-6.172	-	-	-	-8.797	-8.970	-5.873	-2.45	-4.02	-0.19	-6.063	-5
UNII5 996T	6105	31	-	-	-	-8.336	-8.734	-5.520	-	-	-	-2.45	-4.02	-0.19	-5.710	-5
	6265	63	-	-	-	-8.369	-9.463	-5.871	-	-	-	-2.45	-4.02	-0.19	-6.061	-5

Mode : EHT320(80LM)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	-8.577	-11.493	-6.784	-8.078	-11.175	-6.346	-7.193	-10.834	-5.632	-2.45	-4.02	-0.19	-5.822	-5
	6265	63	-8.816	-12.011	-7.116	-7.746	-10.460	-5.884	-7.557	-9.851	-5.544	-2.45	-4.02	-0.19	-5.734	-5
UNII5 52T	6105	31	-7.897	-11.156	-6.217	-7.167	-10.838	-5.615	-7.266	-9.924	-5.384	-2.45	-4.02	-0.19	-5.574	-5
	6265	63	-8.514	-11.436	-6.723	-7.371	-10.231	-5.559	-6.888	-9.573	-5.016	-2.45	-4.02	-0.19	-5.206	-5
UNII5 106T	6105	31	-8.323	-8.628	-5.462	-8.377	-8.690	-5.520	-8.190	-8.873	-5.508	-2.45	-4.02	-0.19	-5.652	-5
	6265	63	-8.256	-8.921	-5.565	-8.544	-8.406	-5.464	-8.417	-8.671	-5.532	-2.45	-4.02	-0.19	-5.654	-5
UNII5 242T	6105	31	-7.921	-9.067	-5.446	-8.114	-9.173	-5.601	-8.111	-9.535	-5.755	-2.45	-4.02	-0.19	-5.636	-5
	6265	63	-7.665	-8.776	-5.175	-7.807	-8.849	-5.287	-8.164	-9.064	-5.581	-2.45	-4.02	-0.19	-5.365	-5
UNII5 484T	6105	31	-8.184	-8.744	-5.445	-	-	-	-8.150	-9.250	-5.655	-2.45	-4.02	-0.19	-5.635	-5
	6265	63	-8.394	-8.860	-5.611	-	-	-	-8.882	-8.450	-5.651	-2.45	-4.02	-0.19	-5.801	-5
UNII5 996T	6105	31	-	-	-	-8.177	-8.962	-5.541	-	-	-	-2.45	-4.02	-0.19	-5.731	-5
	6265	63	-	-	-	-8.243	-8.851	-5.526	-	-	-	-2.45	-4.02	-0.19	-5.716	-5

Mode : EHT320(80MH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	6105	31	-7.784	-10.519	-5.929	-8.237	-10.763	-6.309	-8.809	-11.717	-7.014	-2.45	-4.02	-0.19	-6.119	-5
26T	6265	63	-7.237	-10.575	-5.583	-8.558	-10.741	-6.503	-9.809	-11.932	-7.732	-2.45	-4.02	-0.19	-5.773	-5
UNII5	6105	31	-7.428	-10.190	-5.583	-7.972	-10.835	-6.161	-8.530	-10.784	-6.502	-2.45	-4.02	-0.19	-5.773	-5
52T	6265	63	-7.043	-10.069	-5.287	-8.199	-10.781	-6.290	-8.968	-11.021	-6.864	-2.45	-4.02	-0.19	-5.477	-5
UNII5	6105	31	-8.398	-8.738	-5.554	-8.155	-8.534	-5.330	-8.176	-8.444	-5.298	-2.45	-4.02	-0.19	-5.488	-5
106T	6265	63	-8.525	-8.550	-5.527	-8.891	-8.510	-5.686	-9.321	-8.933	-6.112	-2.45	-4.02	-0.19	-5.717	-5
UNII5	6105	31	-8.528	-9.414	-5.938	-8.551	-9.499	-5.989	-8.215	-9.034	-5.595	-2.45	-4.02	-0.19	-5.785	-5
242T	6265	63	-8.047	-8.815	-5.404	-8.443	-8.565	-5.494	-8.790	-9.063	-5.914	-2.45	-4.02	-0.19	-5.594	-5
UNII5	6105	31	-8.588	-9.068	-5.811	-	-	-	-8.322	-9.200	-5.729	-2.45	-4.02	-0.19	-5.919	-5
484T	6265	63	-8.710	-8.824	-5.757	-	-	-	-9.129	-9.036	-6.072	-2.45	-4.02	-0.19	-5.947	-5
UNII5	6105	31	-	-	-	-7.945	-8.597	-5.248	-	-	-	-2.45	-4.02	-0.19	-5.438	-5
996T	6265	63	-	-	-	-8.703	-8.470	-5.574	-	-	-	-2.45	-4.02	-0.19	-5.764	-5

Mode : EHT320(80HH)

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 26T	6105	31	-7.848	-9.950	-5.763	-8.426	-10.668	-6.394	-8.509	-10.318	-6.310	-2.45	-4.02	-0.19	-5.953	-5
	6265	63	-7.874	-10.382	-5.939	-8.363	-10.586	-6.323	-8.171	-10.623	-6.216	-2.45	-4.02	-0.19	-6.129	-5
UNII5 52T	6105	31	-7.047	-9.470	-5.081	-7.767	-9.934	-5.706	-8.250	-10.273	-6.134	-2.45	-4.02	-0.19	-5.271	-5
	6265	63	-7.621	-9.716	-5.533	-7.845	-9.921	-5.750	-7.177	-9.889	-5.314	-2.45	-4.02	-0.19	-5.504	-5
UNII5 106T	6105	31	-7.895	-8.195	-5.032	-8.415	-8.425	-5.410	-8.198	-8.318	-5.247	-2.45	-4.02	-0.19	-5.222	-5
	6265	63	-9.247	-8.760	-5.986	-9.145	-8.609	-5.858	-8.806	-8.443	-5.610	-2.45	-4.02	-0.19	-5.800	-5
UNII5 242T	6105	31	-7.720	-8.539	-5.100	-8.138	-8.968	-5.523	-8.259	-9.197	-5.693	-2.45	-4.02	-0.19	-5.290	-5
	6265	63	-8.866	-8.999	-5.922	-8.958	-8.956	-5.947	-8.573	-8.510	-5.531	-2.45	-4.02	-0.19	-5.721	-5
UNII5 484T	6105	31	-8.468	-8.660	-5.553	-	-	-	-8.764	-8.855	-5.799	-2.45	-4.02	-0.19	-5.743	-5
	6265	63	-9.239	-9.065	-6.141	-	-	-	-9.077	-8.595	-5.819	-2.45	-4.02	-0.19	-6.009	-5
UNII5 996T	6105	31	-	-	-	-8.221	-8.010	-5.103	-	-	-	-2.45	-4.02	-0.19	-5.293	-5
	6265	63	-	-	-	-9.323	-8.943	-6.118	-	-	-	-2.45	-4.02	-0.19	-6.308	-5

Mode : EHT320(160L/U) 2x996T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 160L	6105	31	-	-	-	-9.381	-10.141	-6.734	-	-	-	-2.45	-4.02	-0.19	-6.924	-5
	6265	63	-	-	-	-9.246	-10.020	-6.606	-	-	-	-2.45	-4.02	-0.19	-6.796	-5
UNII5 160U	6105	31	-	-	-	-9.269	-9.591	-6.417	-	-	-	-2.45	-4.02	-0.19	-6.607	-5
	6265	63	-	-	-	-9.483	-9.485	-6.474	-	-	-	-2.45	-4.02	-0.19	-6.664	-5

Mode : EHT320

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 4x996T	6105	31	-	-	-	-13.971	-14.309	-11.127	-	-	-	-2.45	-4.02	-0.19	-11.317	-5
	6265	63	-	-	-	-13.290	-14.156	-10.691	-	-	-	-2.45	-4.02	-0.19	-10.881	-5
UNII5 SU	6105	31	-	-	-	-11.749	-12.185	-8.951	-	-	-	-2.45	-4.02	-0.19	-9.141	-5
	6265	63	-	-	-	-11.766	-12.084	-8.912	-	-	-	-2.45	-4.02	-0.19	-9.102	-5

Mode : 802.11a

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	Limit
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5935	2	-	-	-	-7.399	-8.923	-5.084	-	-	-	-2.45	-4.02	-0.19	-5.274	-5
	6175	45	-	-	-	-8.528	-9.106	-5.797	-	-	-	-2.45	-4.02	-0.19	-5.987	-5
	6415	93	-	-	-	-8.649	-8.054	-5.331	-	-	-	-2.45	-4.02	-0.19	-5.521	-5
UNII7	6535	117	-	-	-	-8.526	-8.386	-5.445	-	-	-	-3.96	-5.08	-1.49	-6.935	-5
	6695	149	-	-	-	-8.209	-8.566	-5.373	-	-	-	-3.96	-5.08	-1.49	-6.863	-5
	6855	181	-	-	-	-7.383	-8.389	-4.846	-	-	-	-3.96	-5.08	-1.49	-6.336	-5

[MRU]

Mode: EHT20 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5935	2	-8.612	-10.351	-6.385	-8.847	-10.373	-6.533	-8.641	-10.399	-6.422	-2.45	-4.02	-0.19	-6.575	-5
	6175	45	-8.901	-11.831	-7.113	-8.592	-11.551	-6.814	-8.866	-11.537	-6.989	-2.45	-4.02	-0.19	-7.004	-5
	6415	93	-9.648	-10.848	-7.197	-9.635	-10.766	-7.154	-9.655	-10.858	-7.205	-2.45	-4.02	-0.19	-7.344	-5
UNII7	6535	117	-8.831	-9.500	-6.143	-8.749	-9.478	-6.088	-8.590	-9.212	-5.880	-3.96	-5.08	-1.49	-7.370	-5
	6695	149	-9.023	-9.429	-6.211	-8.601	-9.464	-6.001	-8.912	-9.485	-6.179	-3.96	-5.08	-1.49	-7.491	-5
	6855	181	-8.816	-10.945	-6.741	-8.683	-11.192	-6.749	-8.893	-10.869	-6.759	-3.96	-5.08	-1.49	-8.231	-5

Mode : EHT20 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-8.341	-9.167	-5.724	-	-	-	-8.397	-9.210	-5.774	-2.45	-4.02	-0.19	-5.914	-5
	6165	43	-7.826	-10.851	-6.070	-	-	-	-7.959	-10.530	-6.047	-2.45	-4.02	-0.19	-6.237	-5
	6405	91	-9.450	-9.123	-6.273	-	-	-	-9.365	-8.921	-6.127	-2.45	-4.02	-0.19	-6.317	-5
UNII7	6565	123	-9.010	-8.592	-5.786	-	-	-	-9.010	-8.593	-5.786	-3.96	-5.08	-1.49	-7.276	-5
	6685	147	-7.793	-7.871	-4.822	-	-	-	-7.930	-7.858	-4.884	-3.96	-5.08	-1.49	-6.312	-5
	6845	179	-7.625	-8.084	-4.838	-	-	-	-7.818	-7.747	-4.772	-3.96	-5.08	-1.49	-6.262	-5

Mode : EHT40 MRU 52T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-8.710	-10.536	-6.517	-9.198	-10.564	-6.817	-8.919	-10.139	-6.476	-2.45	-4.02	-0.19	-6.666	-5
	6165	43	-8.460	-11.678	-6.767	-8.539	-11.743	-6.842	-8.396	-11.420	-6.640	-2.45	-4.02	-0.19	-6.830	-5
	6405	91	-9.251	-10.606	-6.866	-9.590	-10.658	-7.081	-9.463	-10.523	-6.950	-2.45	-4.02	-0.19	-7.056	-5
UNII7	6565	123	-8.415	-9.273	-5.813	-8.419	-9.285	-5.820	-8.331	-9.589	-5.904	-3.96	-5.08	-1.49	-7.303	-5
	6685	147	-8.283	-9.109	-5.666	-8.194	-9.301	-5.702	-7.977	-9.528	-5.673	-3.96	-5.08	-1.49	-7.156	-5
	6845	179	-7.681	-10.123	-5.722	-8.048	-10.468	-6.081	-7.817	-10.094	-5.798	-3.96	-5.08	-1.49	-7.212	-5

Mode : EHT40 MRU 106T+26T																
Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5965	3	-8.460	-9.654	-6.006	-8.757	-9.497	-6.101	-8.436	-9.335	-5.852	-2.45	-4.02	-0.19	-6.042	-5
	6165	43	-8.215	-11.251	-6.463	-8.316	-11.020	-6.451	-8.124	-10.743	-6.229	-2.45	-4.02	-0.19	-6.419	-5
	6405	91	-9.466	-8.855	-6.140	-9.484	-8.712	-6.071	-9.621	-8.505	-6.017	-2.45	-4.02	-0.19	-6.207	-5
UNII7	6565	123	-8.911	-8.612	-5.749	-9.076	-8.724	-5.886	-8.506	-8.412	-5.449	-3.96	-5.08	-1.49	-6.939	-5
	6685	147	-8.007	-7.735	-4.859	-8.141	-8.199	-5.160	-7.979	-7.966	-4.962	-3.96	-5.08	-1.49	-6.349	-5
	6845	179	-7.759	-8.137	-4.934	-7.897	-8.188	-5.030	-7.986	-7.874	-4.920	-3.96	-5.08	-1.49	-6.410	-5

Mode : EHT80 MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-9.042	-10.347	-6.635	-8.875	-10.524	-6.611	-8.873	-10.085	-6.426	-2.45	-4.02	-0.19	-6.616	-5
	6145	39	-8.672	-10.888	-6.630	-9.082	-11.241	-7.018	-9.052	-10.839	-6.844	-2.45	-4.02	-0.19	-6.820	-5
	6385	87	-9.971	-10.705	-7.312	-10.088	-10.761	-7.401	-9.690	-10.925	-7.253	-2.45	-4.02	-0.19	-7.443	-5
UNII7	6625	135	-8.759	-8.787	-5.762	-8.740	-8.979	-5.847	-8.189	-8.900	-5.519	-3.96	-5.08	-1.49	-7.009	-5
	6705	151	-8.099	-9.375	-5.680	-8.406	-9.512	-5.913	-8.180	-9.536	-5.795	-3.96	-5.08	-1.49	-7.170	-5
	6785	167	-8.101	-9.549	-5.754	-7.885	-9.721	-5.696	-8.118	-9.951	-5.928	-3.96	-5.08	-1.49	-7.186	-5

Mode : EHT80 MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5	5985	7	-9.162	-10.451	-6.748	-9.013	-10.513	-6.688	-9.254	-10.364	-6.763	-2.45	-4.02	-0.19	-6.878	-5
	6145	39	-7.944	-9.959	-5.825	-7.913	-10.158	-5.881	-8.267	-10.292	-6.152	-2.45	-4.02	-0.19	-6.015	-5
	6385	87	-8.771	-9.319	-6.026	-8.691	-9.509	-6.070	-8.173	-9.636	-5.833	-2.45	-4.02	-0.19	-6.023	-5
UNII7	6625	135	-8.624	-8.421	-5.511	-8.256	-8.507	-5.369	-8.528	-8.068	-5.281	-3.96	-5.08	-1.49	-6.771	-5
	6705	151	-7.968	-7.898	-4.922	-8.190	-8.282	-5.225	-8.163	-8.215	-5.178	-3.96	-5.08	-1.49	-6.412	-5
	6785	167	-8.089	-8.007	-5.037	-8.315	-7.930	-5.108	-8.293	-8.077	-5.173	-3.96	-5.08	-1.49	-6.527	-5

Mode : EHT80 MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	5985	7	-9.638	-10.925	-7.224	-9.862	-10.831	-7.309	-9.879	-10.783	-7.297	-2.45	-4.02	-0.19	-7.414	-5
	6145	39	-9.435	-9.964	-6.681	-9.497	-9.892	-6.680	-9.334	-9.798	-6.550	-2.45	-4.02	-0.19	-6.740	-5
	6385	87	-10.650	-10.270	-7.446	-10.710	-10.360	-7.521	-10.590	-10.450	-7.509	-2.45	-4.02	-0.19	-7.636	-5
UNII7	6625	135	-8.379	-8.171	-5.264	-8.206	-8.164	-5.175	-8.100	-8.040	-5.060	-3.96	-5.08	-1.49	-6.550	-5
	6705	151	-8.785	-8.985	-5.874	-8.498	-8.812	-5.642	-8.777	-8.788	-5.772	-3.96	-5.08	-1.49	-7.132	-5
	6785	167	-9.033	-8.707	-5.857	-8.587	-8.801	-5.683	-8.701	-8.517	-5.598	-3.96	-5.08	-1.49	-7.088	-5

Mode : EHT160(80L) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.466	-11.301	-7.277	-9.324	-11.049	-7.091	-9.373	-10.758	-7.000	-2.45	-4.02	-0.19	-7.190	-5
	6185	47	-9.366	-12.513	-7.650	-9.279	-12.026	-7.429	-8.857	-11.803	-7.075	-2.45	-4.02	-0.19	-7.265	-5
	6345	79	-8.392	-11.128	-6.538	-9.192	-10.955	-6.975	-9.110	-10.622	-6.790	-2.45	-4.02	-0.19	-6.728	-5
UNII7	6665	143	-9.757	-9.952	-6.843	-9.747	-9.836	-6.781	-9.436	-10.174	-6.779	-3.96	-5.08	-1.49	-8.269	-5

Mode : EHT160(80L) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.329	-8.766	-6.028	-9.274	-8.329	-5.766	-9.285	-8.491	-5.860	-2.45	-4.02	-0.19	-5.956	-5
	6185	47	-9.167	-9.456	-6.299	-8.766	-9.345	-6.036	-8.438	-8.781	-5.596	-2.45	-4.02	-0.19	-5.786	-5
	6345	79	-9.851	-9.156	-6.480	-10.134	-9.266	-6.668	-9.992	-9.387	-6.669	-2.45	-4.02	-0.19	-6.670	-5
UNII7	6665	143	-9.266	-9.019	-6.131	-9.084	-9.243	-6.153	-9.089	-8.980	-6.024	-3.96	-5.08	-1.49	-7.514	-5

Mode : EHT160(80L) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-10.489	-9.874	-7.161	-10.261	-9.966	-7.101	-10.343	-9.901	-7.106	-2.45	-4.02	-0.19	-7.291	-5
	6185	47	-10.210	-11.150	-7.645	-10.220	-11.530	-7.816	-10.080	-11.590	-7.760	-2.45	-4.02	-0.19	-7.835	-5
	6345	79	-10.463	-9.908	-7.167	-10.486	-9.779	-7.108	-10.402	-9.728	-7.042	-2.45	-4.02	-0.19	-7.232	-5
UNII7	6665	143	-9.006	-8.390	-5.677	-8.842	-8.577	-5.697	-8.848	-8.719	-5.773	-3.96	-5.08	-1.49	-7.167	-5

Mode : EHT160(80U) MRU 52T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.630	-10.641	-7.096	-9.677	-11.150	-7.341	-10.613	-11.767	-8.142	-2.45	-4.02	-0.19	-7.286	-5
	6185	47	-8.921	-11.593	-7.045	-8.933	-11.748	-7.106	-9.676	-12.174	-7.738	-2.45	-4.02	-0.19	-7.235	-5
	6345	79	-9.601	-11.299	-7.357	-9.635	-11.559	-7.481	-8.770	-11.556	-6.933	-2.45	-4.02	-0.19	-7.123	-5
UNII7	6665	143	-9.533	-10.368	-6.920	-9.783	-10.995	-7.337	-10.366	-11.719	-7.980	-3.96	-5.08	-1.49	-8.410	-5

Mode : EHT160(80U) MRU 106T+26T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-9.219	-8.297	-5.723	-9.763	-8.850	-6.272	-9.682	-9.299	-6.476	-2.45	-4.02	-0.19	-5.913	-5
	6185	47	-9.115	-8.611	-5.846	-9.319	-9.206	-6.252	-9.367	-9.582	-6.463	-2.45	-4.02	-0.19	-6.036	-5
	6345	79	-10.226	-9.368	-6.766	-10.005	-9.167	-6.556	-10.198	-8.847	-6.460	-2.45	-4.02	-0.19	-6.650	-5
UNII7	6665	143	-8.922	-8.936	-5.919	-9.353	-9.282	-6.307	-9.831	-9.676	-6.743	-3.96	-5.08	-1.49	-7.409	-5

Mode : EHT160(80U) MRU 484T+242T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-10.697	-10.324	-7.496	-10.121	-9.955	-7.027	-10.368	-10.029	-7.185	-2.45	-4.02	-0.19	-7.217	-5
	6185	47	-9.980	-10.760	-7.342	-9.800	-10.350	-7.056	-9.900	-10.820	-7.326	-2.45	-4.02	-0.19	-7.246	-5
	6345	79	-10.903	-10.200	-7.527	-10.808	-10.229	-7.499	-10.844	-10.427	-7.620	-2.45	-4.02	-0.19	-7.689	-5
UNII7	6665	143	-9.151	-9.292	-6.211	-9.021	-8.969	-5.985	-8.923	-8.788	-5.845	-3.96	-5.08	-1.49	-7.335	-5

Mode : EHT160 MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6025	15	-11.172	-10.932	-8.040	-11.032	-10.992	-8.002	-10.982	-10.782	-7.871	-2.45	-4.02	-0.19	-8.061	-5
	6185	47	-10.462	-10.912	-7.671	-10.432	-11.082	-7.735	-10.792	-10.912	-7.842	-2.45	-4.02	-0.19	-7.861	-5
	6345	79	-11.092	-10.452	-7.750	-10.822	-10.372	-7.581	-11.122	-10.622	-7.855	-2.45	-4.02	-0.19	-7.771	-5
UNII7	6665	143	-8.413	-9.027	-5.699	-8.813	-8.830	-5.812	-8.594	-8.774	-5.673	-3.96	-5.08	-1.49	-7.163	-5

Mode : EHT320(80LL) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5	6105	31	-9.044	-12.034	-7.276	-8.739	-11.737	-6.974	-8.621	-11.237	-6.725	-2.45	-4.02	-0.19	-6.915	-5
52T+26T	6265	63	-9.484	-13.208	-7.948	-9.071	-12.416	-7.419	-8.527	-11.551	-6.771	-2.45	-4.02	-0.19	-6.961	-5
UNII5	6105	31	-8.828	-8.482	-5.641	-8.530	-8.533	-5.521	-8.803	-8.390	-5.581	-2.45	-4.02	-0.19	-5.711	-5
106T+26T	6265	63	-9.709	-9.681	-6.684	-9.558	-9.755	-6.645	-9.419	-9.067	-6.229	-2.45	-4.02	-0.19	-6.419	-5
UNII5	6105	31	-10.052	-9.791	-6.909	-10.016	-10.095	-7.045	-10.086	-10.111	-7.088	-2.45	-4.02	-0.19	-7.099	-5
484T+242T	6265	63	-10.733	-10.506	-7.607	-10.615	-10.706	-7.650	-10.707	-10.659	-7.672	-2.45	-4.02	-0.19	-7.797	-5

Mode : EHT320(80LM) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	-10.078	-11.901	-7.884	-9.960	-11.798	-7.772	-8.926	-11.276	-6.934	-2.45	-4.02	-0.19	-7.124	-5
	6265	63	-10.115	-12.772	-8.233	-9.437	-12.176	-7.584	-8.939	-11.075	-6.867	-2.45	-4.02	-0.19	-7.057	-5
UNII5 106T+26T	6105	31	-9.171	-8.611	-5.871	-9.081	-8.690	-5.871	-9.458	-9.167	-6.300	-2.45	-4.02	-0.19	-6.061	-5
	6265	63	-9.230	-9.099	-6.153	-8.889	-9.043	-5.955	-9.296	-8.923	-6.095	-2.45	-4.02	-0.19	-6.145	-5
UNII5 484T+242T	6105	31	-10.278	-10.553	-7.403	-10.296	-10.383	-7.329	-10.243	-10.161	-7.191	-2.45	-4.02	-0.19	-7.381	-5
	6265	63	-10.484	-10.484	-7.473	-10.215	-10.044	-7.118	-10.288	-10.068	-7.166	-2.45	-4.02	-0.19	-7.308	-5

Mode : EHT320(80MH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	-9.097	-11.378	-7.079	-9.899	-12.019	-7.821	-10.544	-12.062	-8.227	-2.45	-4.02	-0.19	-7.269	-5
	6265	63	-9.116	-11.229	-7.035	-9.941	-11.959	-7.824	-10.973	-12.914	-8.826	-2.45	-4.02	-0.19	-7.225	-5
UNII5 106T+26T	6105	31	-9.437	-9.135	-6.273	-9.676	-9.338	-6.493	-9.378	-9.193	-6.274	-2.45	-4.02	-0.19	-6.463	-5
	6265	63	-9.450	-8.911	-6.162	-9.574	-9.560	-6.556	-10.024	-9.603	-6.798	-2.45	-4.02	-0.19	-6.352	-5
UNII5 484T+242T	6105	31	-10.458	-10.314	-7.375	-10.156	-9.809	-6.968	-10.444	-10.437	-7.430	-2.45	-4.02	-0.19	-7.158	-5
	6265	63	-10.713	-10.127	-7.399	-10.224	-9.613	-6.897	-10.485	-10.021	-7.236	-2.45	-4.02	-0.19	-7.087	-5

Mode : EHT320(80HH) MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 52T+26T	6105	31	-9.051	-11.182	-6.977	-9.333	-11.263	-7.181	-9.883	-12.043	-7.820	-2.45	-4.02	-0.19	-7.167	-5
	6265	63	-9.714	-11.561	-7.530	-9.335	-11.783	-7.379	-9.327	-11.798	-7.379	-2.45	-4.02	-0.19	-7.569	-5
UNII5 106T+26T	6105	31	-8.830	-8.921	-5.865	-9.070	-8.951	-6.000	-9.489	-9.061	-6.259	-2.45	-4.02	-0.19	-6.055	-5
	6265	63	-9.973	-9.050	-6.476	-10.088	-9.609	-6.831	-9.774	-8.940	-6.326	-2.45	-4.02	-0.19	-6.516	-5
UNII5 484T+242T	6105	31	-10.400	-9.897	-7.131	-10.219	-10.045	-7.120	-10.365	-10.185	-7.263	-2.45	-4.02	-0.19	-7.310	-5
	6265	63	-11.314	-10.644	-7.955	-11.564	-10.654	-8.075	-11.464	-10.934	-8.180	-2.45	-4.02	-0.19	-8.145	-5

Mode : EHT320(160L/U) MRU 996T+484T

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1 Gain	ANT2 Gain	Directional Gain	Maximum E.I.R.PSD	Limit
			RU Index : Low			RU Index : Mid			RU Index : High							
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	[dBm/MHz]
UNII5 160L	6105	31	-9.480	-9.215	-6.335	-9.466	-9.231	-6.337	-9.324	-9.316	-6.310	-2.45	-4.02	-0.19	-6.500	-5
	6265	63	-9.483	-9.625	-6.543	-9.362	-9.217	-6.279	-9.361	-9.708	-6.521	-2.45	-4.02	-0.19	-6.469	-5
UNII5 160U	6105	31	-10.081	-9.704	-6.878	-9.578	-9.045	-6.293	-9.991	-9.492	-6.724	-2.45	-4.02	-0.19	-6.483	-5
	6265	63	-10.670	-10.490	-7.569	-10.090	-9.830	-6.948	-10.550	-10.220	-7.372	-2.45	-4.02	-0.19	-7.138	-5

Mode : EHT320 MRU

Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]									ANT1	ANT2	Directional	Maximum	Limit
			RU Index : Low			RU Index : Mid			RU Index : High			Gain	Gain	Gain	E.I.R.PSD	
			ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBi]	[dBi]	[dBm/MHz]	
UNII5 3x996T	6105	31	-11.042	-11.127	-8.074	-11.262	-10.866	-8.049	-11.403	-11.579	-8.480	-2.45	-4.02	-0.19	-8.239	-5
	6265	63	-11.561	-11.087	-8.307	-11.267	-10.841	-8.038	-11.280	-11.647	-8.449	-2.45	-4.02	-0.19	-8.228	-5
UNII5 2x996T+484T	6105	31	-10.613	-10.459	-7.525	-9.987	-10.758	-7.345	-10.470	-10.411	-7.430	-2.45	-4.02	-0.19	-7.535	-5
	6265	63	-10.450	-10.506	-7.468	-10.145	-10.483	-7.300	-10.500	-10.438	-7.459	-2.45	-4.02	-0.19	-7.490	-5
UNII5 3x996T+484T	6105	31	-11.541	-11.869	-8.691	-11.630	-12.064	-8.831	-12.150	-12.114	-9.121	-2.45	-4.02	-0.19	-8.881	-5
	6265	63	-12.007	-11.823	-8.903	-11.997	-12.073	-9.024	-11.685	-11.882	-8.772	-2.45	-4.02	-0.19	-8.962	-5