




TEST REPORT

| | | |
|--|---|---|
| <p>KCTL KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p> | <p>Report No.: KR20-SRF0262-A Page (1) of (80)</p> |  |
| <p>1. Client</p> | | |
| <p>◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2020-08-31</p> | | |
| <p>2. Use of Report : Certification</p> | | |
| <p>3. Name of Product / Model : Tablet PC / SM-T577U/DS</p> | | |
| <p>4. Manufacturer / Country of Origin : Samsung Electronics Co., Ltd. / Vietnam</p> | | |
| <p>5. FCC ID : A3LSMT577U</p> | | |
| <p>6. Date of Test : 2020-09-07 to 2020-09-24</p> | | |
| <p>7. Location of Test : <input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: Address of testing location)</p> | | |
| <p>8. Test method used : FCC Part 2 FCC Part 90 subpart S</p> | | |
| <p>9. Test Results : Refer to the test result in the test report</p> | | |
| <p>Affirmation</p> | <p>Tested by Name : Taeyoung Kim <i>(Signature)</i></p> | <p>Technical Manager Name : Seungyong Kim <i>(Signature)</i></p> |
| <p>2020-10-15</p> | | |
| <p>KCTL Inc.</p> | | |
| <p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p> | | |

REPORT REVISION HISTORY

| Date | Revision | Page No |
|------------|-------------------|---------|
| 2020-10-06 | Originally issued | - |
| 2020-10-15 | Updated | 52 |
| | | |
| | | |
| | | |

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR20-SRF0262 is superseded by the report No. KR20-SRF0262-A.

General remarks for test reports

Nothing significant to report.

KCTL

CONTENTS

| | | |
|------|---|----|
| 1. | General information | 4 |
| 2. | Device information | 4 |
| 2.1. | Accessory information | 6 |
| 2.2. | Frequency/channel operations..... | 7 |
| 3. | Maximum ERP/EIRP power..... | 8 |
| 4. | Summary of tests..... | 9 |
| 4.1. | Worst case orientation | 10 |
| 5. | Measurement uncertainty | 11 |
| 6. | Measurement results explanation example | 12 |
| 7. | Test results | 13 |
| 7.1. | Conducted output power..... | 13 |
| 7.2. | 99% Occupied Bandwidth & 26 dB Bandwidth..... | 21 |
| 7.3. | Spurious Emissions at Antenna Terminal..... | 41 |
| 7.4. | Band Edge Emissions at Antenna Terminal | 49 |
| 7.5. | Frequency stability..... | 66 |
| 7.6. | Radiated Power (ERP/EIRP) | 70 |
| 7.7. | Radiated Spurious Emissions..... | 75 |
| 8. | Measurement equipment..... | 80 |

1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,
Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,
Rep. of Korea
Factory : Samsung Electronics Vietnam Thai Nguyen Co., Ltd (SEVT)
Address : Yen binh Industrial Park, Dong Tien Ward, Pho Yen Town Thai Nguyen
Province, Vietnam
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
Industry Canada Registration No. : 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : Tablet PC
Model : SM-T577U/DS
Modulation technique : Bluetooth(BDR/EDR)_GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE)_GFSK
WIFI(802.11a/b/g/n/ac/ax)_DSSS, OFDM, OFDMA
NFC_ASK
LTE_QPSK, 16QAM, 64QAM
WCDMA_QPSK
Number of channels : Bluetooth(BDR/EDR)_79 ch / Bluetooth(BLE)_40 ch
802.11b/g/n/ac/ax_HT20/VHT20/HE20 : 11 ch
UNII-1: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2A: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2C: 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
NFC: 1 ch
Power source : DC 3.85 V
Antenna specification : LTE/WCDMA_LDS carrier Antenna
WIFI/Bluetooth(BDR/EDR/BLE)_LDS carrier Antenna
NFC_FPCB Antenna

| | |
|------------------------|---|
| Antenna gain | : WIFI/Bluetooth(BDR/EDR/BLE): ANT 1: -2.50 dBi, ANT 2: -2.50 dBi UNII-1 ANT 1: -3.20 dBi, ANT 2: -3.70 dBi UNII-2A ANT 1: -3.20 dBi, ANT 2: -3.80 dBi UNII-2C ANT 1: -6.20 dBi, ANT 2: -6.70 dBi UNII-3 ANT 1: -6.50 dBi, ANT 2: -6.40 dBi |
| Frequency range | : Bluetooth(BDR/EDR/BLE)_2 402 MHz ~ 2 480 MHz 2 412 MHz ~ 2 462 MHz (802.11b/g/n/ac/ax_HT20/VHT20/HE20) UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n/ac/ax_HT40/VHT40/HE40) UNII-1: 5 210 MHz (802.11ac/ax_VHT80/HE80) UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n/ac/ax_HT40/VHT40/HE40) UNII-2A: 5 290 MHz (802.11ac/ax_VHT80/HE80) UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n/ac/ax_HT40/VHT40/HE40) UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac/ax_VHT80/HE80) UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n/ac/ax_HT20/VHT20/HE20) UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n/ac/ax_HT40/VHT40/HE40) UNII-3: 5 775 MHz (802.11ac/ax_VHT80/HE80) LTE Band 2_1 850.7 MHz ~ 1 909.3 MHz LTE Band 4_1 710.7 MHz ~ 1 754.3 MHz LTE Band 5_824.7 MHz ~ 848.3 MHz LTE Band 7_2 502.5 MHz ~ 2 567.5 MHz LTE Band 12_699.7 MHz ~ 715.3 MHz LTE Band 13_779.5 MHz ~ 784.5 MHz LTE Band 14_790.5 MHz ~ 795.5 MHz LTE Band 17_706.5 MHz ~ 713.5 MHz LTE Band 25_1 850.7 MHz ~ 1 914.3 MHz LTE Band 26_824.7 MHz ~ 848.3 MHz, 814.7 MHz ~ 823.3 MHz LTE Band 41_2 498.5 MHz ~ 2 687.5 MHz (FCC) LTE Band 41_2 502.5 MHz ~ 2 687.5 MHz (IC) LTE Band 66_1 710.7 MHz ~ 1 779.3 MHz LTE Band 71_665.5 MHz ~ 695.5 MHz WCDMA 850_826.4 MHz ~ 846.6 MHz WCDMA 1700_1 712.4 MHz ~ 1 752.6 MHz WCDMA 1900_1 852.4 MHz ~ 1 907.6 MHz NFC_13.56 MHz |
| Software version | : T577U.001 |
| Hardware version | : REV1.0 |
| Test device serial No. | : Conducted(R32N400L08B, R32N601A7WX) Radiated(R32N400KG2R, R32N400KG4Z, R32N601AB7T) |
| Operation temperature | : -30 °C ~ 50 °C |

2.1. Accessory information

| Equipment | Manufacturer | Model | Serial No. | Power source | FCC ID |
|-------------------|------------------|-----------------|--------------------|---|--------|
| Travel Adapter | SOLU-M | EP-TA200 | R37M12L1AC1 HM3 | Input : 100-240V, 50- 60Hz (0.5A) Output : 9.0V, 1.67A or 5.0V, 2.0A | - |
| Data Cable | RFTECH | EP- DT725BBE | - | - | - |
| External Earphone | ALMUS | EHS64AVF BE | - | - | - |
| Protective Cover | WILLTECH VINA | GH98- 45810A | - | - | - |
| S-Pen | WACOM | CP-913W- 00B | - | - | - |

KCTL

2.2. Frequency/channel operations

This device contains the following capabilities:

WiFi (802.11a/b/g/n/ac/ax), Bluetooth (BDR/EDR/BLE), NFC,
LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 7, LTE Band 12, LTE Band 13, LTE Band 14, LTE
Band 17, LTE Band 25, LTE Band 26, LTE Band 29 (Downlink only), LTE Band 41 (PC2, PC3),
LTE Band 66, LTE Band 71, WCDMA 850, WCDMA 1700, WCDMA 1900

LTE Band 14

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-------|-----------------|-------|-----------------|
| 23305 | 790.5 | - | - |
| 23330 | 793.0 | 23330 | 793.0 |
| 23355 | 795.5 | - | - |

Table 2.2.1. 5M BW

Table 2.2.2. 10M BW

LTE Band 26

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-------|-----------------|-------|-----------------|-------|-----------------|
| 26697 | 814.7 | 26705 | 815.5 | 26715 | 816.5 |
| 26783 | 823.3 | 26775 | 822.5 | 26765 | 821.5 |

Table 2.3.3. 1.4M BW

Table 2.3.4. 3M BW

Table 2.3.5. 5M BW

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-------|-----------------|-------|-----------------|
| 26740 | 819.0 | 26765 | 821.5 |

Table 2.3.6. 10M BW

Table 2.3.7. 15M BW

Notes:

1. As for 814 - 824 MHz, the lower band (814 - 824 MHz) of Band 26 is not supported in Canada.

3. Maximum ERP/EIRP power**LTE Band 14**

| Mode | Tx frequency (MHz) | Emission designator | ERP | |
|-------------|--------------------|---------------------|------------------|----------------|
| | | | Max. power (dBm) | Max. power (W) |
| LTE Band 14 | 790.5 ~ 795.5 | 4M52G7D | 19.58 | 0.091 |
| | | 4M53W7D | 18.80 | 0.076 |
| | 793.0 | 8M97G7D | 19.69 | 0.093 |
| | | 9M04W7D | 18.66 | 0.073 |

LTE Band 26 (Part 90)

| Mode | Tx frequency (MHz) | Emission designator | Conducted | |
|------------------|--------------------|---------------------|------------------|----------------|
| | | | Max. power (dBm) | Max. power (W) |
| LTE Band 26 | 814.7 ~ 823.3 | 1M10G7D | 24.18 | 0.262 |
| | | 1M10W7D | 23.02 | 0.200 |
| | 815.5 ~ 822.5 | 2M72G7D | 23.97 | 0.249 |
| | | 2M70W7D | 23.07 | 0.203 |
| | 816.5 ~ 821.5 | 4M53G7D | 23.94 | 0.248 |
| | | 4M55W7D | 22.78 | 0.190 |
| | 819.0 | 8M99G7D | 24.14 | 0.259 |
| | | 8M99W7D | 23.05 | 0.202 |
| | 821.5 | 13M5G7D | 24.25 | 0.266 |
| | | 13M5W7D | 23.08 | 0.203 |
| Straddle channel | 824.0 | 1M10G7D | 24.02 | 0.252 |
| | | 1M09W7D | 22.84 | 0.192 |
| | | 2M70G7D | 23.91 | 0.246 |
| | | 2M70W7D | 23.01 | 0.200 |
| | | 4M51G7D | 23.91 | 0.246 |
| | | 4M53W7D | 22.69 | 0.186 |
| | | 8M94G7D | 24.16 | 0.261 |
| | | 8M99W7D | 23.07 | 0.203 |
| | | 13M4G7D | 24.33 | 0.271 |
| | | 13M5W7D | 23.15 | 0.207 |

4. Summary of tests

| FCC Part section(s) | Parameter | Test Limit | Test Condition | Test results |
|----------------------------------|--|--|----------------|--------------|
| 2.1046 90.635 | Conducted Output Power | < 100 Watts | Conducted | Pass |
| 2.1049 | Occupied Bandwidth & 26 dB Bandwidth | N/A | | Pass |
| 2.1051 90.543(e) 90.691(a) | Band Edge Emissions at Antenna Terminal | On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10\log_{10}(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. | | Pass |
| | Spurious Emissions at Antenna Terminal | On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10\log_{10}(P)$ dB. < $43 + 10\log_{10}(P)$ dB, < $50 + 10\log_{10}(P)$ dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge | | Pass |
| 2.1055 90.213 | Frequency stability | < 2.5 ppm | | Pass |
| 90.542(a)(7) | Effective Radiated Power | < 3 Watts max. ERP | Radiated | Pass |
| 2.1053 90.543(e) 90.691(a) | Radiated Spurious Emissions | < $43 + 10\log_{10}(P)$ dB | | Pass |

Notes:

- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.26-2015
 - ANSI/TIA-603-E-2016
 - KDB 971168 D01 v03r01

4.1. Worst case orientation

1. All modes of operation were investigated and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations in the test data.
2. All final radiated testing was performed with the EUT in worst case orientation.
3. All the radiated tests have been performed two modes (with charger and without charger) and the with charger is the worst case mode.
4. For LTE Band 14, LTE Band 26 (Part 90), The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.

| Test condition | LTE Band | Modulation | Bandwidth (MHz) | RB size | RB offset |
|----------------|--------------|----------------|-------------------|---------|----------------------|
| Radiated | B14 | QPSK | 10 | 1 | 0, 24, 49 |
| | B26 (Part90) | | 15 | 1 | 0, 38, 74 |
| Conducted | B14 | QPSK, 16QAM | 5, 10, 15, 20 | 1 | 0, 24, 49, 74, 99 |
| | | | | Full | 0 |
| | B26 (Part90) | | 1.4, 3, 5, 10, 15 | 1 | 0, 5, 14, 24, 49, 74 |
| | | | | Full | 0 |

KCTL

5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

| Parameter | Expanded uncertainty (\pm) | |
|------------------------------|--------------------------------|--------|
| Conducted RF power | 1.3 dB | |
| Conducted spurious emissions | 1.3 dB | |
| Radiated spurious emissions | 30 MHz ~ 1 GHz | 3.7 dB |
| | Above 1 GHz | 5.7 dB |

6. Measurement results explanation example

| Frequency (MHz) | Factor(dB) | Frequency (MHz) | Factor(dB) |
|-----------------|------------|-----------------|------------|
| 30 | 6.12 | 11 000 | 8.19 |
| 50 | 6.13 | 12 000 | 7.30 |
| 100 | 6.16 | 13 000 | 7.48 |
| 200 | 6.20 | 14 000 | 7.37 |
| 300 | 6.23 | 15 000 | 7.78 |
| 400 | 6.26 | 16 000 | 7.73 |
| 500 | 6.28 | 17 000 | 8.00 |
| 600 | 6.29 | 18 000 | 7.85 |
| 700 | 6.32 | 19 000 | 7.81 |
| 800 | 6.34 | 20 000 | 7.94 |
| 900 | 6.38 | 21 000 | 7.77 |
| 1 000 | 6.36 | 22 000 | 8.34 |
| 2 000 | 6.50 | 23 000 | 8.16 |
| 3 000 | 6.58 | 24 000 | 8.29 |
| 4 000 | 6.76 | 25 000 | 8.05 |
| 5 000 | 6.88 | 26 000 | 8.58 |
| 6 000 | 6.90 | 26 500 | 8.63 |
| 7 000 | 6.05 | 27 000 | 8.40 |
| 8 000 | 5.93 | 28 000 | 8.33 |
| 9 000 | 6.50 | 29 000 | 8.36 |
| 10 000 | 7.47 | 30 000 | 8.72 |


Note.

Offset(dB) = RF cable loss(dB) + Divider (dB)

7. Test results

7.1. Conducted output power

Test setup



Test procedure

971168 D01 v03r01 – Section 5.2
ANSI C63.26-2015 – Section 5.2.4.2
CFR 47, - Section §2.1046

Test settings

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurement be performed only over durations of active transmissions at maximum output power level applies. Thus, an average power meter can always be used to perform the measurement when the EUT can be configured to transmit continuously.

If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle < 98%), then the following options can be implemented to facilitate measurement of the average power with an average power meter:

- a) A gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only during active transmission bursts at maximum output power levels.
- b) A conventional average power meter with no signal gating capability can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than or equal to $\pm 2\%$) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $[10\log(1/\text{duty cycle})]$. See 5.2.4.3.4 for guidance with respect to measuring the transmitter duty cycle.

See item r) of 4.1 for more information regarding power meter functional requirements and limitations, and consult the instrumentation-specific application literature for proper set-up and use.

Notes:

Offset(dB) = RF cable loss(dB)

Test results

| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power | | | |
|-------------|-----------------|-----------|---------|-----------|-------|-----------------|--------|-------|---|
| | | | | | | Frequency (MHz) | | | |
| | | | | | | Low | Middle | High | |
| LTE Band 14 | 5 | QPSK | 1 | 0 | 0 | 23.67 | 23.75 | 23.71 | |
| | | | 1 | 12 | 0 | 23.83 | 23.81 | 23.79 | |
| | | | 1 | 24 | 0 | 23.75 | 23.80 | 23.81 | |
| | | | 12 | 0 | 1 | 22.79 | 22.84 | 22.80 | |
| | | | 12 | 7 | 1 | 22.77 | 22.80 | 22.83 | |
| | | | 12 | 13 | 1 | 22.73 | 22.70 | 22.76 | |
| | | 25 | 0 | 1 | 22.53 | 22.58 | 22.55 | | |
| | | 16QAM | 1 | 0 | 1 | 22.41 | 22.76 | 22.38 | |
| | | | 1 | 12 | 1 | 22.53 | 22.77 | 22.54 | |
| | | | 1 | 24 | 1 | 22.57 | 22.84 | 22.68 | |
| | | | 12 | 0 | 2 | 21.73 | 21.78 | 21.82 | |
| | | | 12 | 7 | 2 | 21.68 | 21.73 | 21.81 | |
| | | | 12 | 13 | 2 | 21.73 | 21.72 | 21.78 | |
| | | 25 | 0 | 2 | 21.61 | 21.65 | 21.70 | | |
| | | 64QAM | 1 | 0 | 2 | 21.66 | 21.69 | 21.77 | |
| | | | 1 | 12 | 2 | 21.78 | 21.85 | 21.89 | |
| | | | 1 | 24 | 2 | 21.74 | 21.77 | 21.85 | |
| | | | 12 | 0 | 3 | 20.66 | 20.69 | 20.74 | |
| | | | 12 | 7 | 3 | 20.69 | 20.72 | 20.78 | |
| | | | 12 | 13 | 3 | 20.64 | 20.70 | 20.77 | |
| | | 25 | 0 | 3 | 20.71 | 20.78 | 20.73 | | |
| | | 10 | QPSK | 1 | 0 | 0 | - | 23.99 | - |
| | | | | 1 | 25 | 0 | - | 24.23 | - |
| | | | | 1 | 49 | 0 | - | 24.05 | - |
| | 25 | | | 0 | 1 | - | 23.04 | - | |
| | 25 | | | 12 | 1 | - | 23.14 | - | |
| | 25 | | | 25 | 1 | - | 23.05 | - | |
| | 50 | | | 0 | 1 | - | 22.89 | - | |
| | 16QAM | | | 1 | 0 | 1 | - | 22.91 | - |
| | | | | 1 | 25 | 1 | - | 22.98 | - |
| | | | | 1 | 49 | 1 | - | 22.87 | - |
| | | | | 25 | 0 | 2 | - | 22.06 | - |
| | | | | 25 | 12 | 2 | - | 22.13 | - |
| | | | 25 | 25 | 2 | - | 22.06 | - | |
| | 50 | | 0 | 2 | - | 22.04 | - | | |
| | 64QAM | | 1 | 0 | 2 | - | 21.74 | - | |
| | | | 1 | 25 | 2 | - | 21.88 | - | |
| | | | 1 | 49 | 2 | - | 21.83 | - | |
| | | | 25 | 0 | 3 | - | 20.77 | - | |
| | | | 25 | 12 | 3 | - | 20.79 | - | |
| | | | 25 | 25 | 3 | - | 20.73 | - | |
| | | | 50 | 0 | 3 | - | 20.84 | - | |

| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power | | |
|-------------|-----------------|-----------|---------|-----------|-------|-----------------|--------|-------|
| | | | | | | Frequency (MHz) | | |
| | | | | | | Low | Middle | High |
| LTE Band 26 | 1.4 | QPSK | 1 | 0 | 0 | 24.18 | - | 24.13 |
| | | | 1 | 3 | 0 | 23.92 | - | 23.86 |
| | | | 1 | 5 | 0 | 23.98 | - | 23.87 |
| | | | 3 | 0 | 0 | 23.87 | - | 23.80 |
| | | | 3 | 1 | 0 | 23.81 | - | 23.69 |
| | | | 3 | 3 | 0 | 23.81 | - | 23.74 |
| | | 6 | 0 | 1 | 22.63 | - | 22.49 | |
| | | 1 | 0 | 1 | 23.02 | - | 22.97 | |
| | | 1 | 3 | 1 | 22.89 | - | 22.81 | |
| | | 1 | 5 | 1 | 22.79 | - | 22.73 | |
| | | 3 | 0 | 1 | 22.87 | - | 22.74 | |
| | | 3 | 1 | 1 | 22.85 | - | 22.79 | |
| | | 3 | 3 | 1 | 22.83 | - | 22.75 | |
| | | 6 | 0 | 2 | 21.73 | - | 21.64 | |
| | | 1 | 0 | 2 | 21.52 | - | 21.59 | |
| | | 1 | 3 | 2 | 21.80 | - | 21.83 | |
| | | 1 | 5 | 2 | 21.61 | - | 21.70 | |
| | | 3 | 0 | 2 | 21.58 | - | 21.61 | |
| | | 3 | 1 | 2 | 21.61 | - | 21.67 | |
| | | 3 | 3 | 2 | 21.55 | - | 21.66 | |
| | | 6 | 0 | 3 | 20.45 | - | 20.51 | |
| | | 1 | 0 | 0 | 23.97 | - | 23.89 | |
| | | 1 | 8 | 0 | 23.86 | - | 23.82 | |
| | | 1 | 14 | 0 | 23.83 | - | 23.75 | |
| | 8 | 0 | 1 | 22.89 | - | 22.84 | | |
| | 8 | 4 | 1 | 22.84 | - | 22.75 | | |
| | 8 | 7 | 1 | 22.89 | - | 22.80 | | |
| | 15 | 0 | 1 | 22.71 | - | 22.62 | | |
| | 1 | 0 | 1 | 23.07 | - | 23.02 | | |
| | 1 | 8 | 1 | 23.02 | - | 22.93 | | |
| | 1 | 14 | 1 | 22.88 | - | 22.83 | | |
| | 8 | 0 | 2 | 21.80 | - | 21.72 | | |
| | 8 | 4 | 2 | 21.81 | - | 21.76 | | |
| | 8 | 7 | 2 | 21.80 | - | 21.74 | | |
| | 15 | 0 | 2 | 21.88 | - | 21.83 | | |
| | 1 | 0 | 2 | 21.52 | - | 21.64 | | |
| | 1 | 8 | 2 | 21.75 | - | 21.85 | | |
| | 1 | 14 | 2 | 21.49 | - | 21.54 | | |
| | 8 | 0 | 3 | 20.44 | - | 20.49 | | |
| | 8 | 4 | 3 | 20.60 | - | 20.66 | | |
| | 8 | 7 | 3 | 20.57 | - | 20.67 | | |
| | 15 | 0 | 3 | 20.54 | - | 20.59 | | |

| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power | | | |
|-------------|-----------------|-----------|---------|-----------|-------|-----------------|--------|-------|-------|
| | | | | | | Frequency (MHz) | | | |
| | | | | | | Low | Middle | High | |
| LTE Band 26 | 5 | QPSK | 1 | 0 | 0 | 23.94 | - | 23.87 | |
| | | | 1 | 12 | 0 | 23.94 | - | 23.87 | |
| | | | 1 | 24 | 0 | 24.22 | - | 24.18 | |
| | | | 12 | 0 | 1 | 22.89 | - | 22.83 | |
| | | | 12 | 7 | 1 | 22.92 | - | 22.89 | |
| | | | 12 | 13 | 1 | 22.89 | - | 22.84 | |
| | | 25 | 0 | 1 | 22.70 | - | 22.62 | | |
| | | 16QAM | 1 | 0 | 1 | 22.61 | - | 22.55 | |
| | | | 1 | 12 | 1 | 22.77 | - | 22.74 | |
| | | | 1 | 24 | 1 | 22.78 | - | 22.73 | |
| | | | 12 | 0 | 2 | 21.79 | - | 21.72 | |
| | | | 12 | 7 | 2 | 21.81 | - | 21.73 | |
| | | | 12 | 13 | 2 | 21.79 | - | 21.71 | |
| | | 25 | 0 | 2 | 21.83 | - | 21.75 | | |
| | | 64QAM | 1 | 0 | 2 | 21.66 | - | 21.73 | |
| | | | 1 | 12 | 2 | 21.73 | - | 21.84 | |
| | | | 1 | 24 | 2 | 21.45 | - | 21.48 | |
| | | | 12 | 0 | 3 | 20.45 | - | 20.49 | |
| | | | 12 | 7 | 3 | 20.65 | - | 20.69 | |
| | | | 12 | 13 | 3 | 20.56 | - | 20.60 | |
| | | 25 | 0 | 3 | 20.53 | - | 20.65 | | |
| | | 10 | QPSK | 1 | 0 | 0 | 23.75 | - | 23.80 |
| | | | | 1 | 25 | 0 | 24.09 | - | 24.14 |
| | | | | 1 | 49 | 0 | 23.85 | - | 23.90 |
| | 25 | | | 0 | 1 | 22.82 | - | 22.87 | |
| | 25 | | | 12 | 1 | 22.89 | - | 22.94 | |
| | 25 | | | 25 | 1 | 22.83 | - | 22.88 | |
| | 50 | | | 0 | 1 | 22.69 | - | 22.74 | |
| | 16QAM | | | 1 | 0 | 1 | 23.00 | - | 23.05 |
| | | | | 1 | 25 | 1 | 22.99 | - | 23.04 |
| | | | | 1 | 49 | 1 | 22.89 | - | 22.94 |
| | | | | 25 | 0 | 2 | 21.71 | - | 21.76 |
| | | | | 25 | 12 | 2 | 21.82 | - | 21.87 |
| | | | 25 | 25 | 2 | 21.78 | - | 21.83 | |
| | 50 | | 0 | 2 | 21.83 | - | 21.88 | | |
| | 64QAM | | 1 | 0 | 2 | 21.67 | - | 21.78 | |
| | | | 1 | 25 | 2 | 21.77 | - | 21.87 | |
| | | | 1 | 49 | 2 | 21.62 | - | 21.67 | |
| | | | 25 | 0 | 3 | 20.47 | - | 20.55 | |
| | | | 25 | 12 | 3 | 20.53 | - | 20.66 | |
| | | | 25 | 25 | 3 | 20.53 | - | 20.63 | |
| | 50 | | 0 | 3 | 20.50 | - | 20.60 | | |

| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power | | |
|-------------|-----------------|-----------|---------|-----------|-----|-----------------|--------|------|
| | | | | | | Frequency (MHz) | | |
| | | | | | | Low | Middle | High |
| LTE Band 26 | 15 | QPSK | 1 | 0 | 0 | - | 24.05 | - |
| | | | 1 | 36 | 0 | - | 24.14 | - |
| | | | 1 | 74 | 0 | - | 24.25 | - |
| | | | 36 | 0 | 1 | - | 23.21 | - |
| | | | 36 | 18 | 1 | - | 23.21 | - |
| | | | 36 | 37 | 1 | - | 23.18 | - |
| | | | 75 | 0 | 1 | - | 23.08 | - |
| | | 16QAM | 1 | 0 | 1 | - | 23.04 | - |
| | | | 1 | 36 | 1 | - | 23.06 | - |
| | | | 1 | 74 | 1 | - | 23.08 | - |
| | | | 36 | 0 | 2 | - | 21.91 | - |
| | | | 36 | 18 | 2 | - | 21.90 | - |
| | | | 36 | 37 | 2 | - | 21.89 | - |
| | | | 75 | 0 | 2 | - | 21.94 | - |
| | | 64QAM | 1 | 0 | 2 | - | 21.76 | - |
| | | | 1 | 36 | 2 | - | 21.89 | - |
| | | | 1 | 74 | 2 | - | 21.70 | - |
| | | | 36 | 0 | 3 | - | 20.67 | - |
| | | | 36 | 18 | 3 | - | 20.74 | - |
| | | | 36 | 37 | 3 | - | 20.69 | - |
| | | | 75 | 0 | 3 | - | 20.69 | - |

KCTL

Straddle channel

| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power | |
|-------------|-----------------|-----------|---------|-----------|-------|---------------|-------|
| LTE Band 26 | 1.4 | QPSK | 1 | 0 | 0 | 24.02 | |
| | | | 1 | 3 | 0 | 23.71 | |
| | | | 1 | 5 | 0 | 23.72 | |
| | | | 3 | 0 | 0 | 23.74 | |
| | | | 3 | 1 | 0 | 23.57 | |
| | | | 3 | 3 | 0 | 23.59 | |
| | | 6 | 0 | 1 | 22.35 | | |
| | | 16QAM | 1 | 0 | 1 | 22.84 | |
| | | | 1 | 3 | 1 | 22.73 | |
| | | | 1 | 5 | 1 | 22.60 | |
| | | | 3 | 0 | 1 | 22.68 | |
| | | | 3 | 1 | 1 | 22.65 | |
| | | | 3 | 3 | 1 | 22.69 | |
| | | 6 | 0 | 2 | 21.53 | | |
| | | 64QAM | 1 | 0 | 2 | 21.55 | |
| | | | 1 | 3 | 2 | 21.81 | |
| | | | 1 | 5 | 2 | 21.69 | |
| | | | 3 | 0 | 2 | 21.68 | |
| | 3 | | 1 | 2 | 21.64 | | |
| | 3 | | 3 | 2 | 21.61 | | |
| | 6 | 0 | 3 | 20.57 | | | |
| | 3 | QPSK | 1 | 0 | 0 | 23.91 | |
| | | | 1 | 8 | 0 | 23.81 | |
| | | | 1 | 14 | 0 | 23.77 | |
| | | | 8 | 0 | 1 | 22.81 | |
| | | | 8 | 4 | 1 | 22.79 | |
| | | | 8 | 7 | 1 | 22.86 | |
| | | | 15 | 0 | 1 | 22.65 | |
| | | | 16QAM | 1 | 0 | 1 | 23.01 |
| | | | | 1 | 8 | 1 | 22.95 |
| | | 1 | | 14 | 1 | 22.80 | |
| | | 8 | | 0 | 2 | 21.75 | |
| | | 8 | | 4 | 2 | 21.76 | |
| | | 8 | | 7 | 2 | 21.73 | |
| | | 15 | 0 | 2 | 21.81 | | |
| | | 64QAM | 1 | 0 | 2 | 21.65 | |
| 1 | | | 8 | 2 | 21.72 | | |
| 1 | | | 14 | 2 | 21.58 | | |
| 8 | | | 0 | 3 | 20.56 | | |
| 8 | 4 | | 3 | 20.64 | | | |
| 8 | 7 | | 3 | 20.70 | | | |
| 15 | 0 | 3 | 20.58 | | | | |


| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power |
|-------------|-----------------|-----------|---------|-----------|-----|---------------|
| LTE Band 26 | 5 | QPSK | 1 | 0 | 0 | 23.82 |
| | | | 1 | 12 | 0 | 23.84 |
| | | | 1 | 24 | 0 | 23.91 |
| | | | 12 | 0 | 1 | 22.80 |
| | | | 12 | 7 | 1 | 22.85 |
| | | | 12 | 13 | 1 | 22.76 |
| | | | 25 | 0 | 1 | 22.54 |
| | | 16QAM | 1 | 0 | 1 | 22.47 |
| | | | 1 | 12 | 1 | 22.69 |
| | | | 1 | 24 | 1 | 22.68 |
| | | | 12 | 0 | 2 | 21.65 |
| | | | 12 | 7 | 2 | 21.66 |
| | | | 12 | 13 | 2 | 21.65 |
| | | | 25 | 0 | 2 | 21.71 |
| | | 64QAM | 1 | 0 | 2 | 21.77 |
| | | | 1 | 12 | 2 | 21.76 |
| | | | 1 | 24 | 2 | 21.48 |
| | | | 12 | 0 | 3 | 20.55 |
| | | | 12 | 7 | 3 | 20.76 |
| | | | 12 | 13 | 3 | 20.59 |
| | | | 25 | 0 | 3 | 20.61 |
| | 10 | QPSK | 1 | 0 | 0 | 23.82 |
| | | | 1 | 25 | 0 | 24.16 |
| | | | 1 | 49 | 0 | 23.92 |
| | | | 25 | 0 | 1 | 22.89 |
| | | | 25 | 12 | 1 | 22.96 |
| | | | 25 | 25 | 1 | 22.90 |
| | | | 50 | 0 | 1 | 22.76 |
| | | 16QAM | 1 | 0 | 1 | 23.07 |
| | | | 1 | 25 | 1 | 23.06 |
| | | | 1 | 49 | 1 | 22.96 |
| | | | 25 | 0 | 2 | 21.78 |
| | | | 25 | 12 | 2 | 21.89 |
| | | | 25 | 25 | 2 | 21.85 |
| | | | 50 | 0 | 2 | 21.90 |
| | | 64QAM | 1 | 0 | 2 | 21.89 |
| | | | 1 | 25 | 2 | 21.86 |
| | | | 1 | 49 | 2 | 21.75 |
| | | | 25 | 0 | 3 | 20.66 |
| | | | 25 | 12 | 3 | 20.74 |
| | | | 25 | 25 | 3 | 20.73 |
| | | | 50 | 0 | 3 | 20.70 |

| Test Band | Bandwidth (MHz) | Test mode | RB size | RB offset | MPR | Maximum power |
|-------------|-----------------|-----------|---------|-----------|-----|---------------|
| LTE Band 26 | 15 | QPSK | 1 | 0 | 0 | 24.14 |
| | | | 1 | 36 | 0 | 24.23 |
| | | | 1 | 74 | 0 | 24.33 |
| | | | 36 | 0 | 1 | 23.28 |
| | | | 36 | 18 | 1 | 23.29 |
| | | | 36 | 37 | 1 | 23.25 |
| | | | 75 | 0 | 1 | 23.14 |
| | | 16QAM | 1 | 0 | 1 | 23.09 |
| | | | 1 | 36 | 1 | 23.15 |
| | | | 1 | 74 | 1 | 23.14 |
| | | | 36 | 0 | 2 | 21.97 |
| | | | 36 | 18 | 2 | 21.99 |
| | | | 36 | 37 | 2 | 21.97 |
| | | | 75 | 0 | 2 | 22.00 |
| | | 64QAM | 1 | 0 | 2 | 21.88 |
| | | | 1 | 36 | 2 | 21.85 |
| | | | 1 | 74 | 2 | 21.79 |
| | | | 36 | 0 | 3 | 20.71 |
| | | | 36 | 18 | 3 | 20.74 |
| | | | 36 | 37 | 3 | 20.75 |
| | | | 75 | 0 | 3 | 20.70 |

KCTL

7.2. 99% Occupied Bandwidth & 26 dB Bandwidth

Test setup

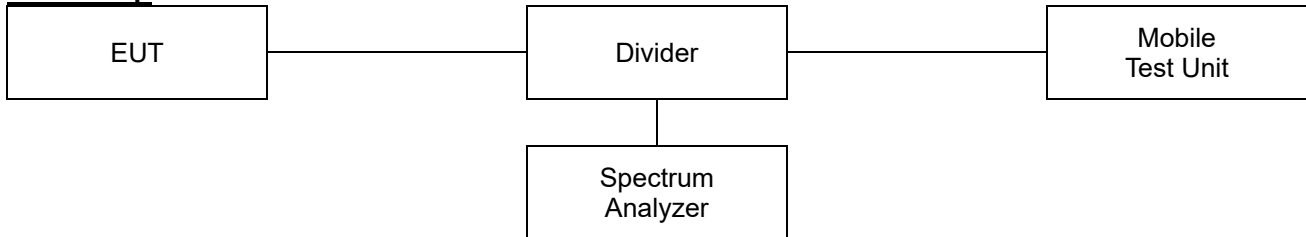

Limit

According to §2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Test procedure

971168 D01 v03r01 – Section 4.2 and 4.3
ANSI C63.26-2015 – Section 5.4.3 and 5.4.4

Test settings

◆ 26dB Bandwidth

- c) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- d) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- e) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f) Determine the reference value by either of the following:
 - 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- g) Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- h) If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used

for step i).

- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- j) The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

◆ 99% Occupied Bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Notes:

1. The EUT was setup to maximum output power as its lowest and highest channel with all bandwidth, Modulation.

Test results

| Test Band | Bandwidth (MHz) | Frequency (MHz) | Test mode | 26dB bandwidth (MHz) | 99 % bandwidth (MHz) |
|-------------|-----------------|-----------------|-----------|----------------------|----------------------|
| LTE Band 14 | 5 | 790.5 | QPSK | 5.35 | 4.52 |
| | | | 16QAM | 5.28 | 4.52 |
| | | 793.0 | QPSK | 5.43 | 4.52 |
| | | | 16QAM | 5.31 | 4.53 |
| | | 795.5 | QPSK | 5.28 | 4.52 |
| | | | 16QAM | 5.33 | 4.53 |
| | 10 | 793.0 | QPSK | 10.24 | 8.97 |
| | | | 16QAM | 10.54 | 9.04 |

KCTL


| Test Band | Bandwidth (MHz) | Frequency (MHz) | Test mode | 26dB bandwidth (MHz) | 99 % bandwidth (MHz) |
|-------------|-----------------|-----------------|-----------|----------------------|----------------------|
| LTE Band 26 | 1.4 | 814.7 | QPSK | 1.34 | 1.10 |
| | | | 16QAM | 1.34 | 1.10 |
| | | 823.3 | QPSK | 1.32 | 1.10 |
| | | | 16QAM | 1.31 | 1.09 |
| | 3 | 815.5 | QPSK | 3.06 | 2.71 |
| | | | 16QAM | 3.12 | 2.70 |
| | | 822.5 | QPSK | 3.08 | 2.72 |
| | | | 16QAM | 3.09 | 2.70 |
| | 5 | 816.5 | QPSK | 5.30 | 4.53 |
| | | | 16QAM | 5.33 | 4.55 |
| | | 821.5 | QPSK | 5.17 | 4.53 |
| | | | 16QAM | 5.33 | 4.52 |
| | 10 | 819.0 | QPSK | 10.37 | 8.99 |
| | | | 16QAM | 10.19 | 8.99 |
| | 15 | 821.5 | QPSK | 14.91 | 13.45 |
| | | | 16QAM | 15.36 | 13.45 |

Straddle channel


| Test Band | Bandwidth (MHz) | Frequency (MHz) | Test mode | 26dB bandwidth (MHz) | 99 % bandwidth (MHz) |
|-------------|-----------------|-----------------|-----------|----------------------|----------------------|
| LTE Band 26 | 1.4 | 824 | QPSK | 1.33 | 1.10 |
| | | | 16QAM | 1.32 | 1.09 |
| | 3 | 824 | QPSK | 3.11 | 2.70 |
| | | | 16QAM | 3.10 | 2.70 |
| | 5 | 824 | QPSK | 5.36 | 4.51 |
| | | | 16QAM | 5.36 | 4.53 |
| | 10 | 824 | QPSK | 10.37 | 8.94 |
| | | | 16QAM | 10.42 | 8.99 |
| | 15 | 824 | QPSK | 14.84 | 13.41 |
| | | | 16QAM | 15.02 | 13.45 |

26dB Bandwidth


Test mode: LTE Band 14

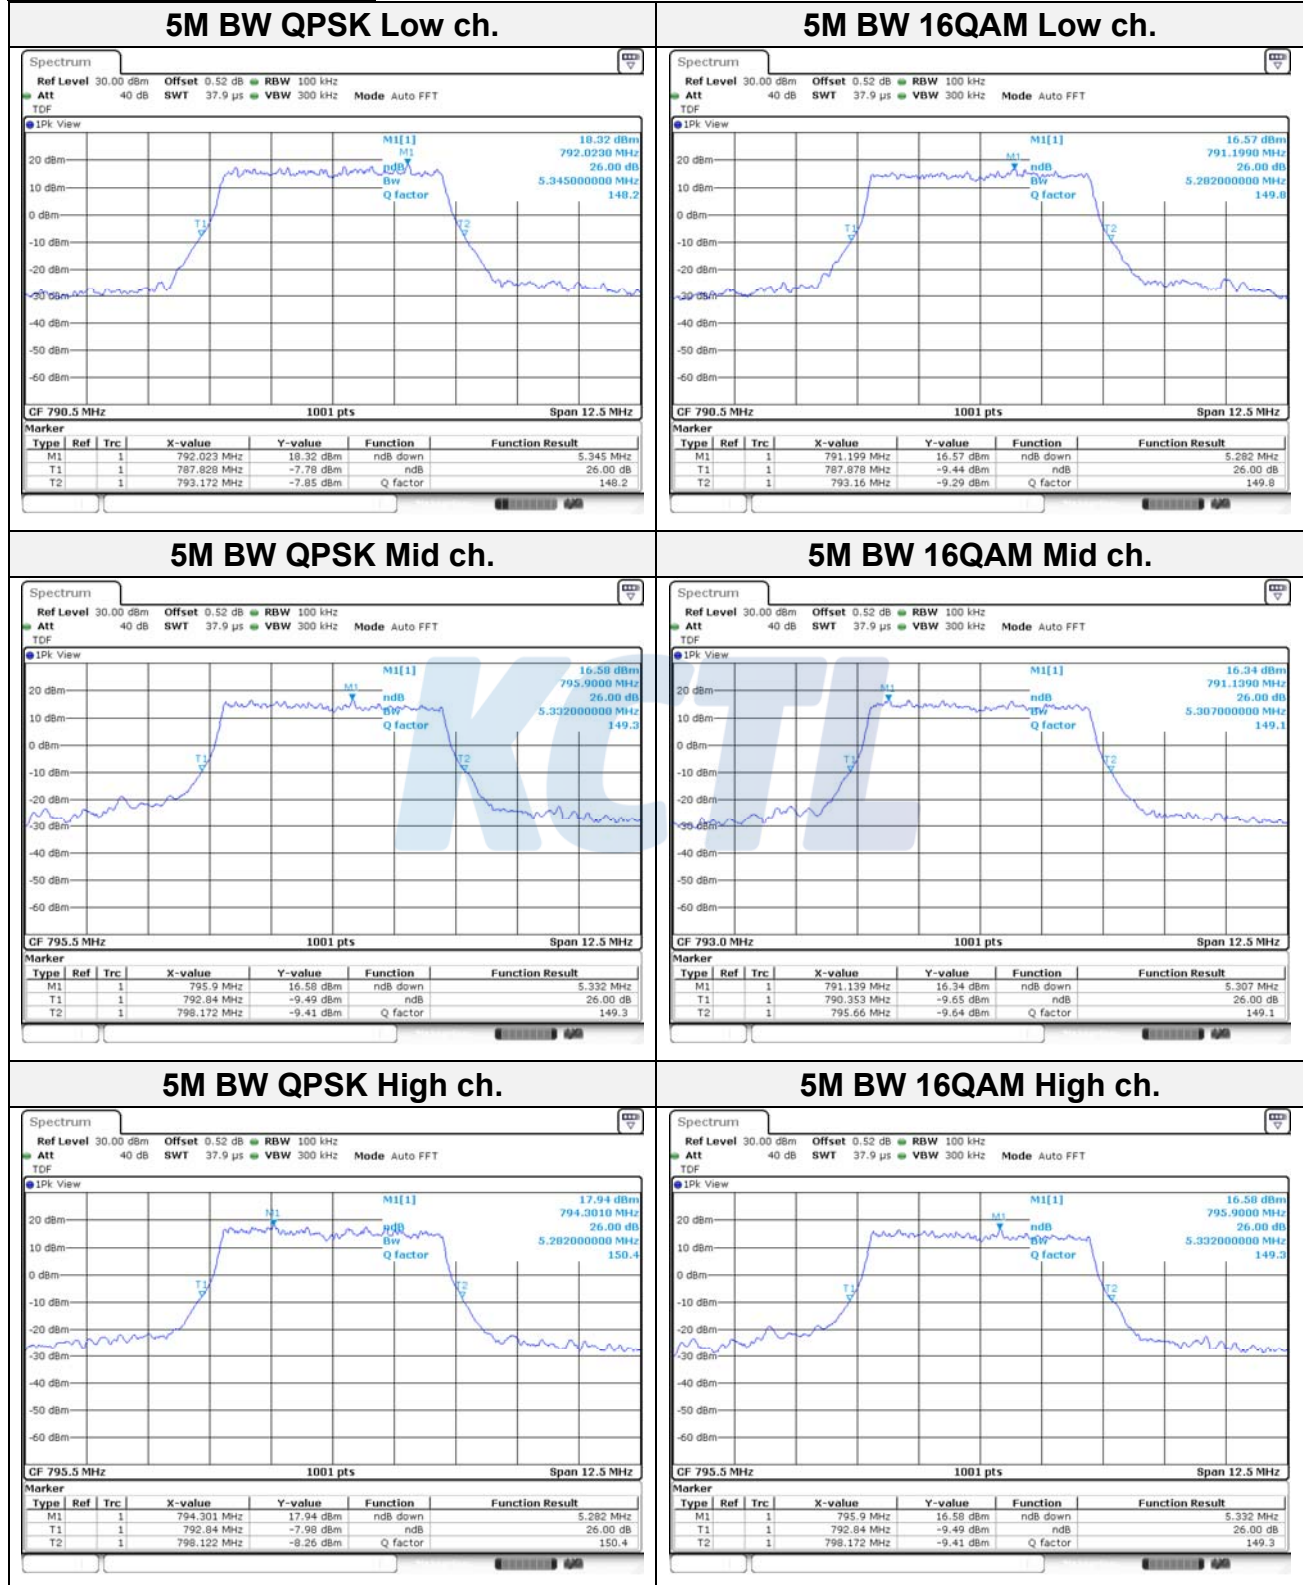

10M BW QPSK Mid ch.

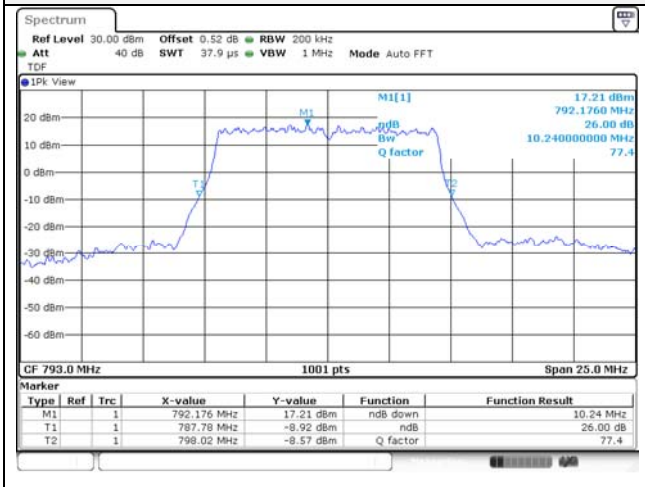


10M BW 16QAM Mid ch.

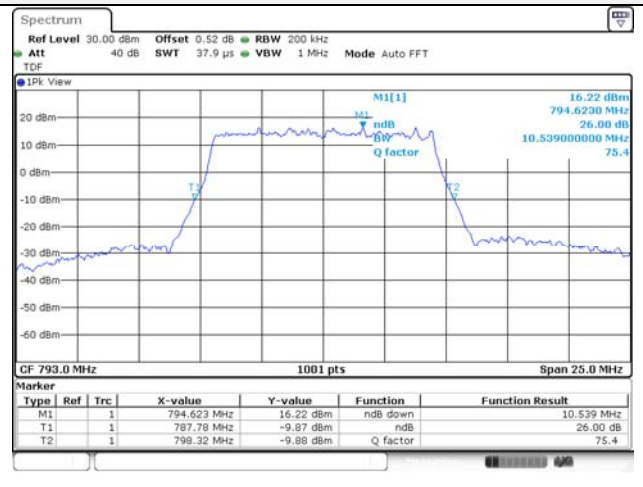


Test mode: LTE Band 26


1.4M BW QPSK Low ch.

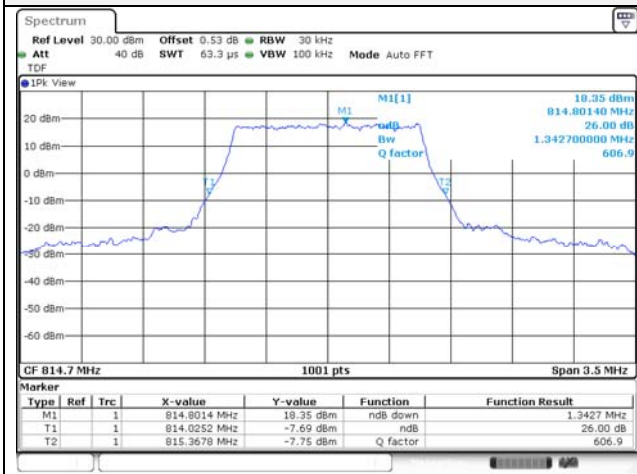


1.4M BW 16QAM Low ch.

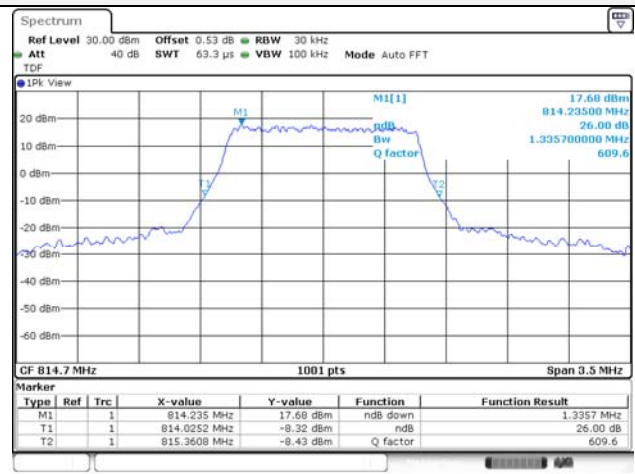


1.4M BW QPSK High ch.

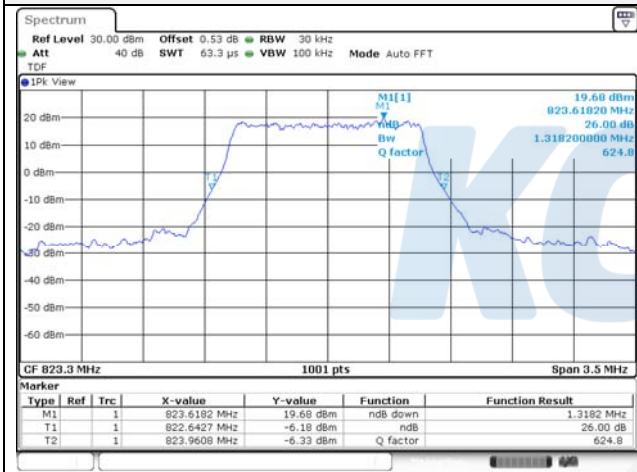


1.4M BW 16QAM High ch.

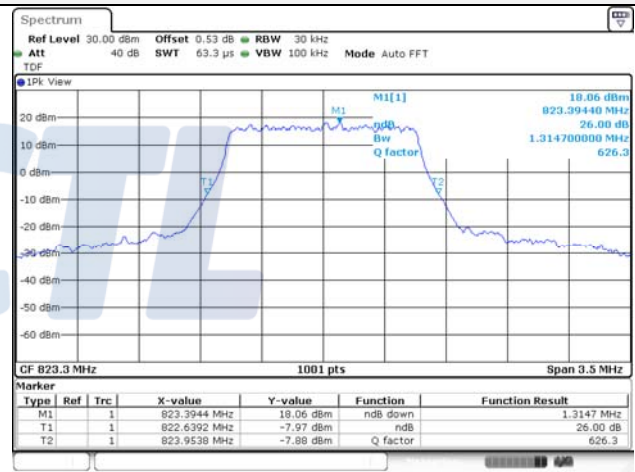


3M BW QPSK Low ch.

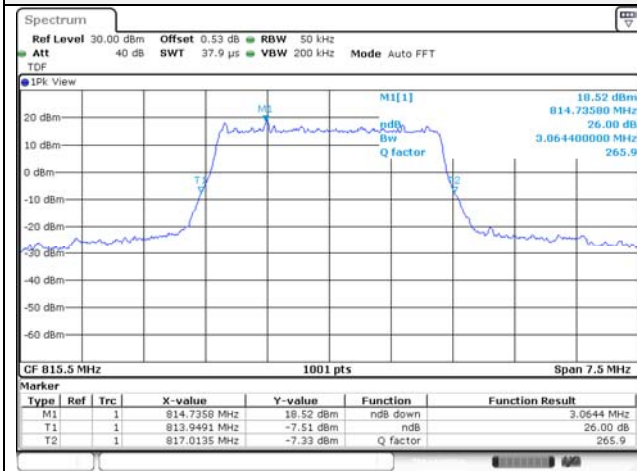


3M BW 16QAM Low ch.

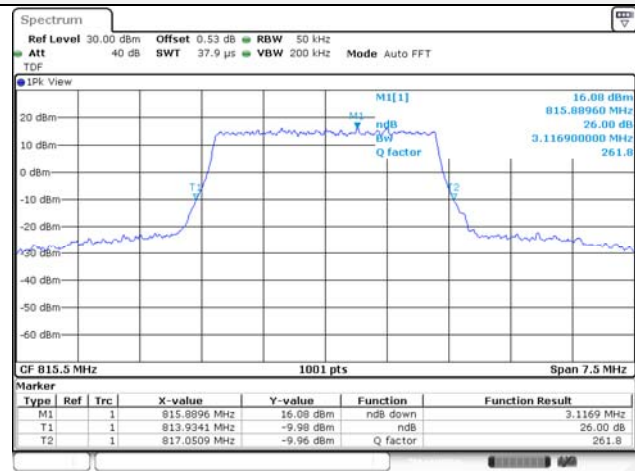


3M BW QPSK High ch.

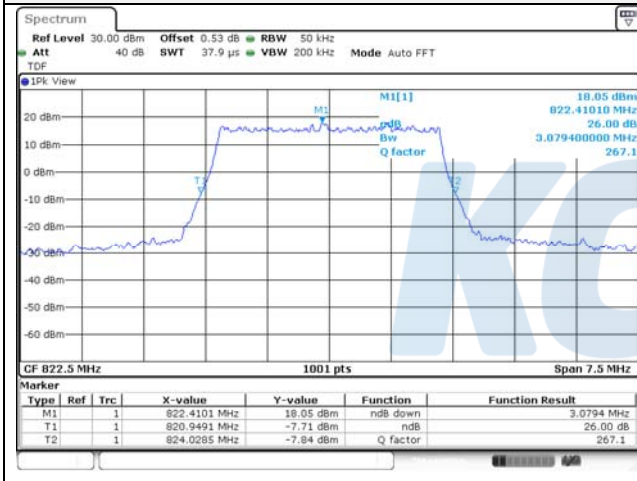


3M BW 16QAM High ch.

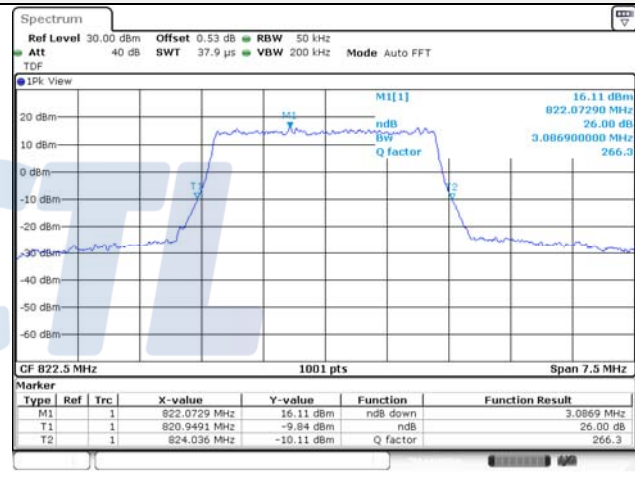


5M BW QPSK Low ch.

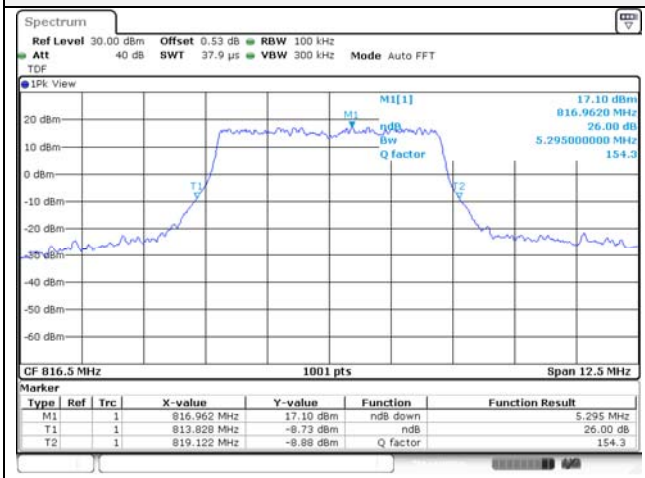


5M BW 16QAM Low ch.

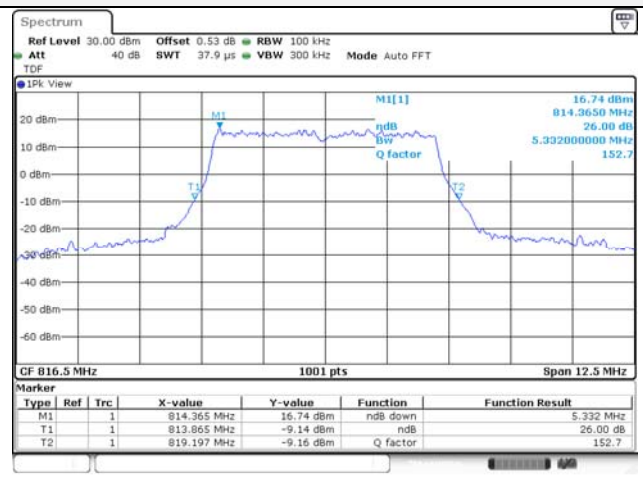


5M BW QPSK High ch.

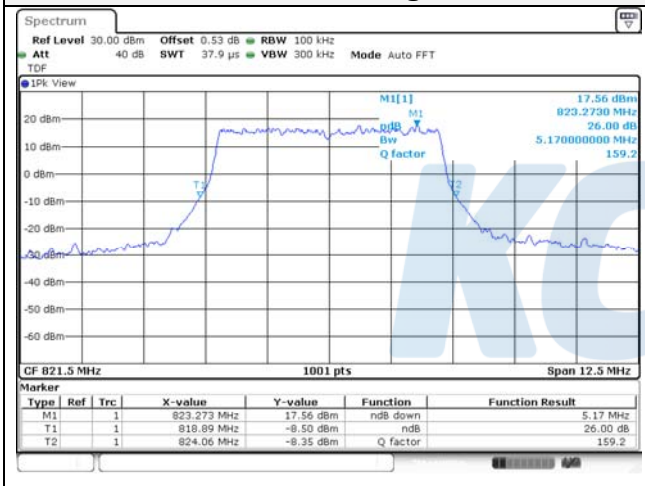


5M BW 16QAM High ch.

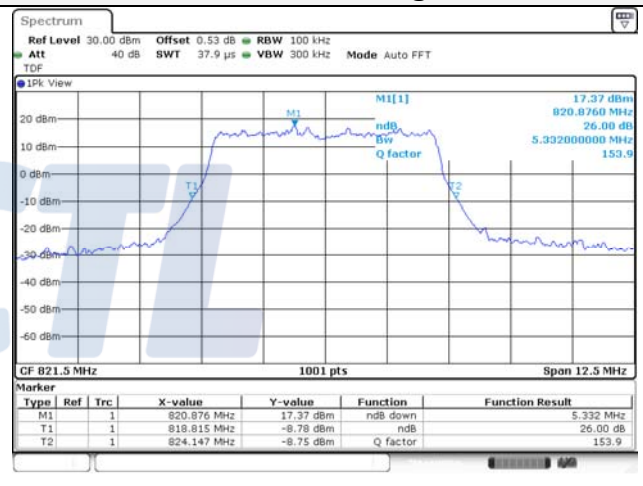


10M BW QPSK Mid ch.

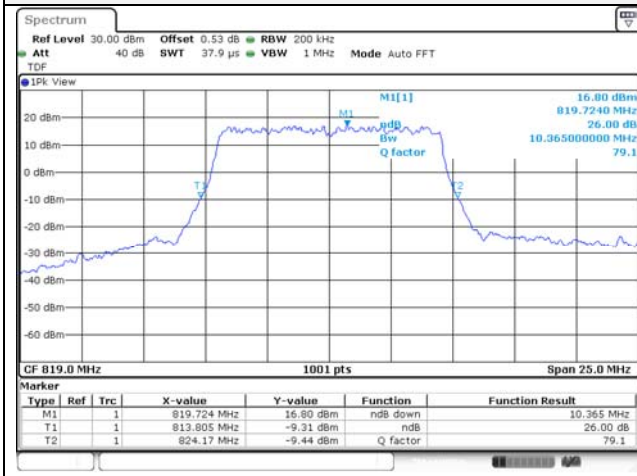


10M BW 16QAM Mid ch.

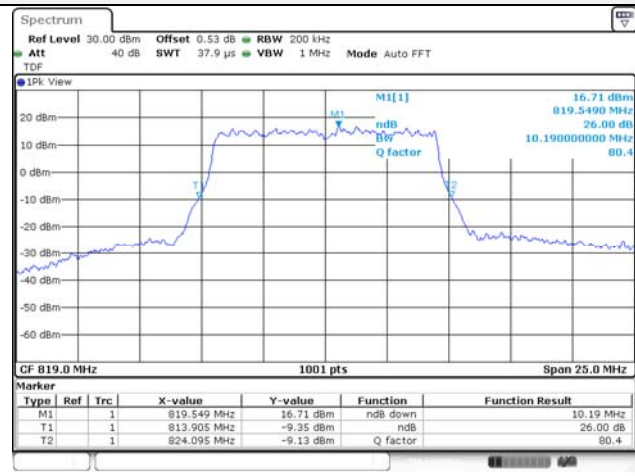

15M BW QPSK Mid ch.

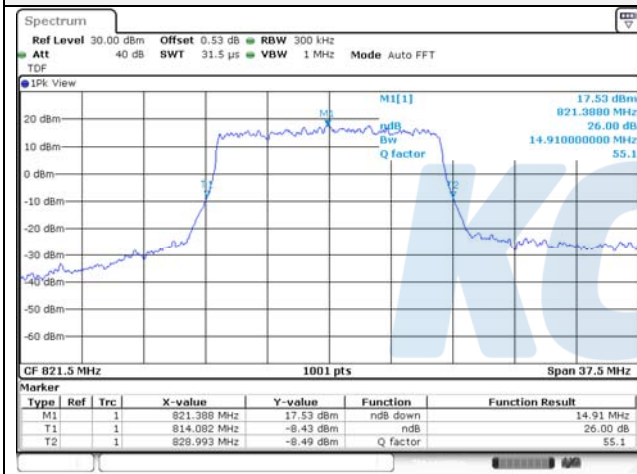


15M BW 16QAM Mid ch.

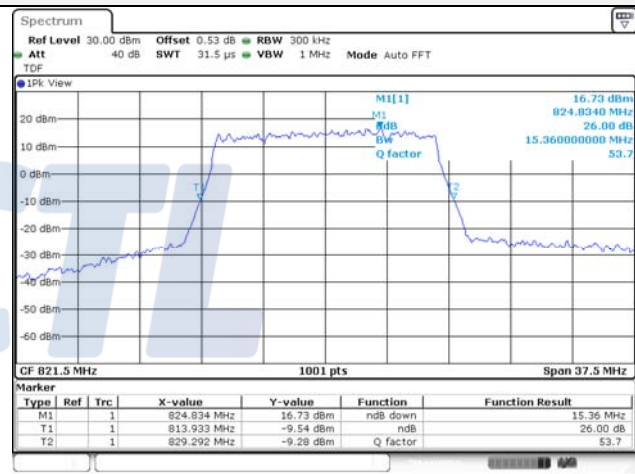


Straddle channel


1.4M BW QPSK

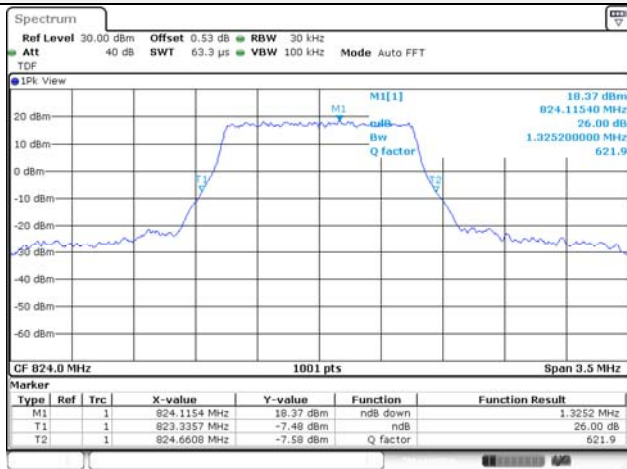


1.4M BW 16QAM

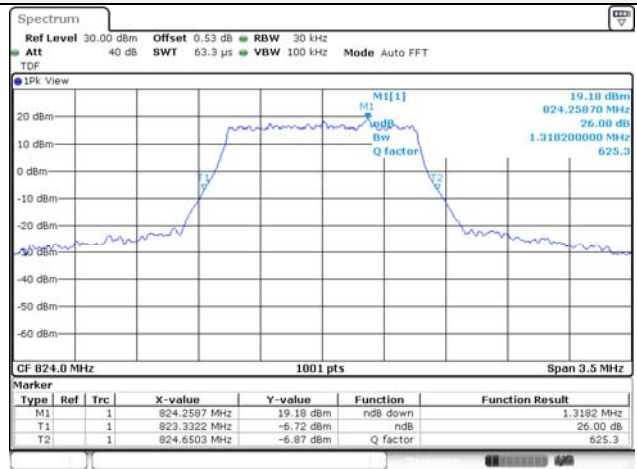


3M BW QPSK

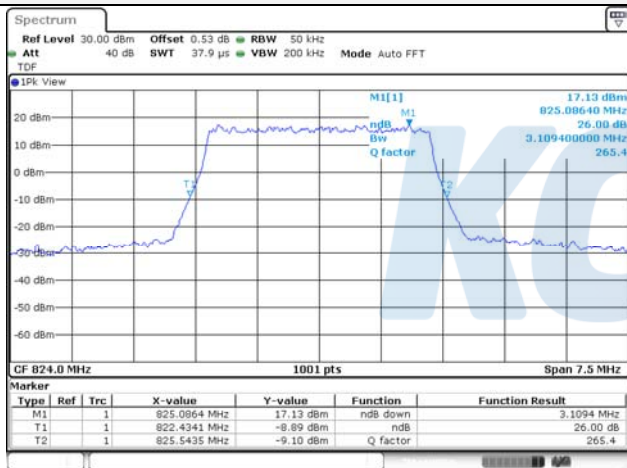


3M BW 16QAM

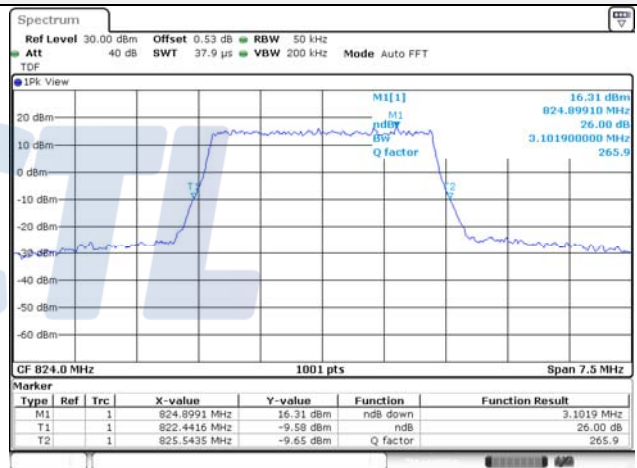


5M BW QPSK

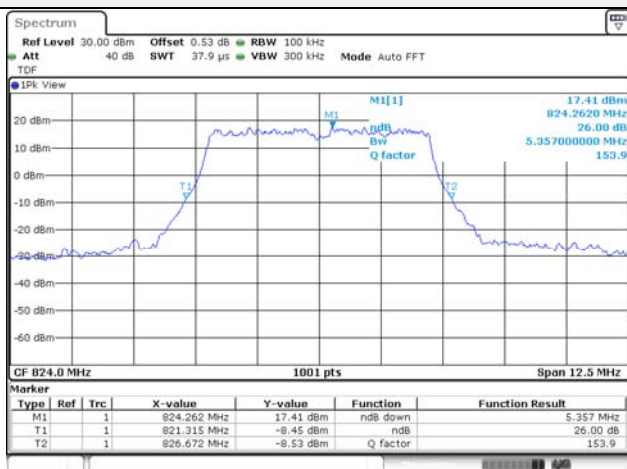


5M BW 16QAM

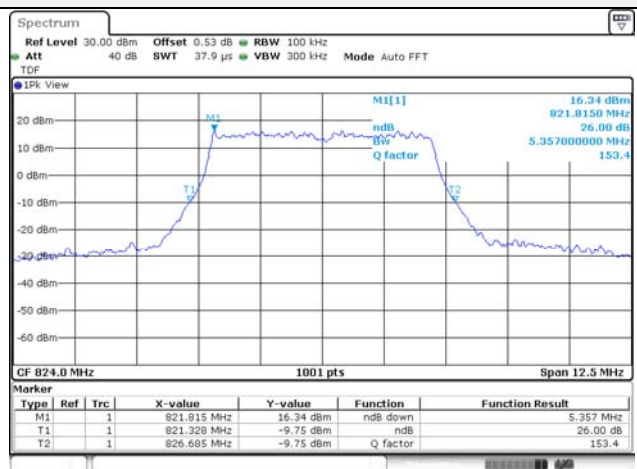


10M BW QPSK

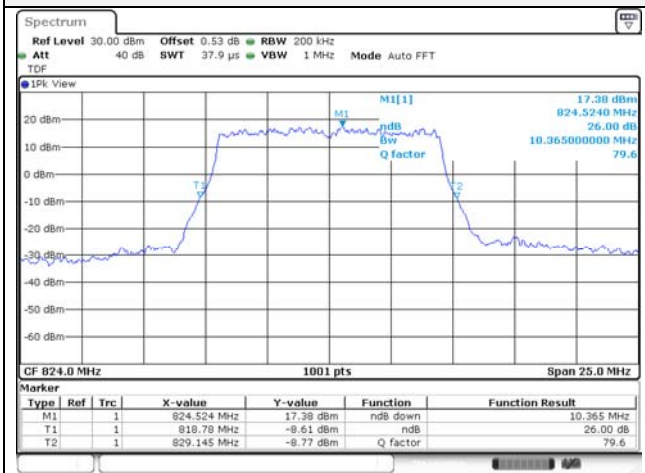


10M BW 16QAM

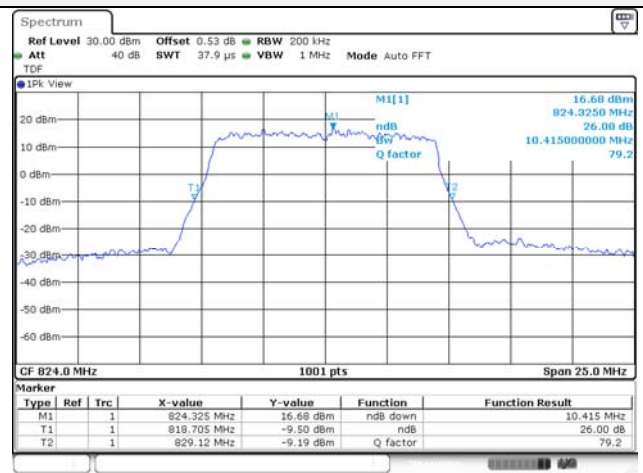


15M BW QPSK

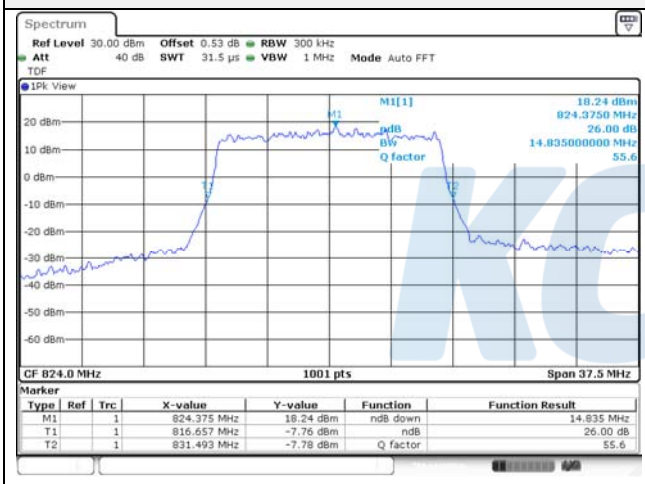


15M BW 16QAM

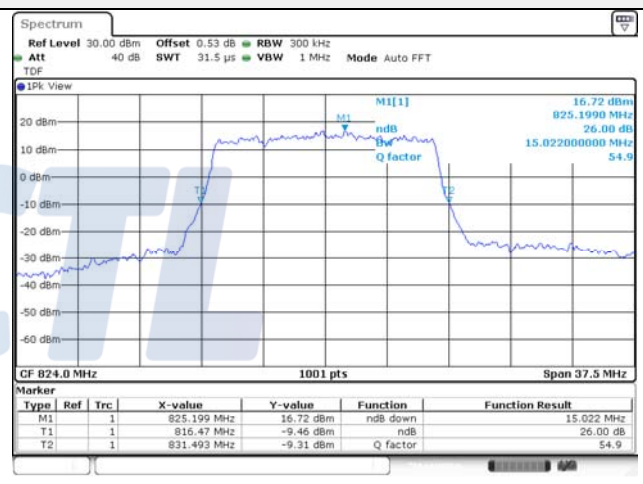


99% Occupied Bandwidth
Test mode: LTE Band 14

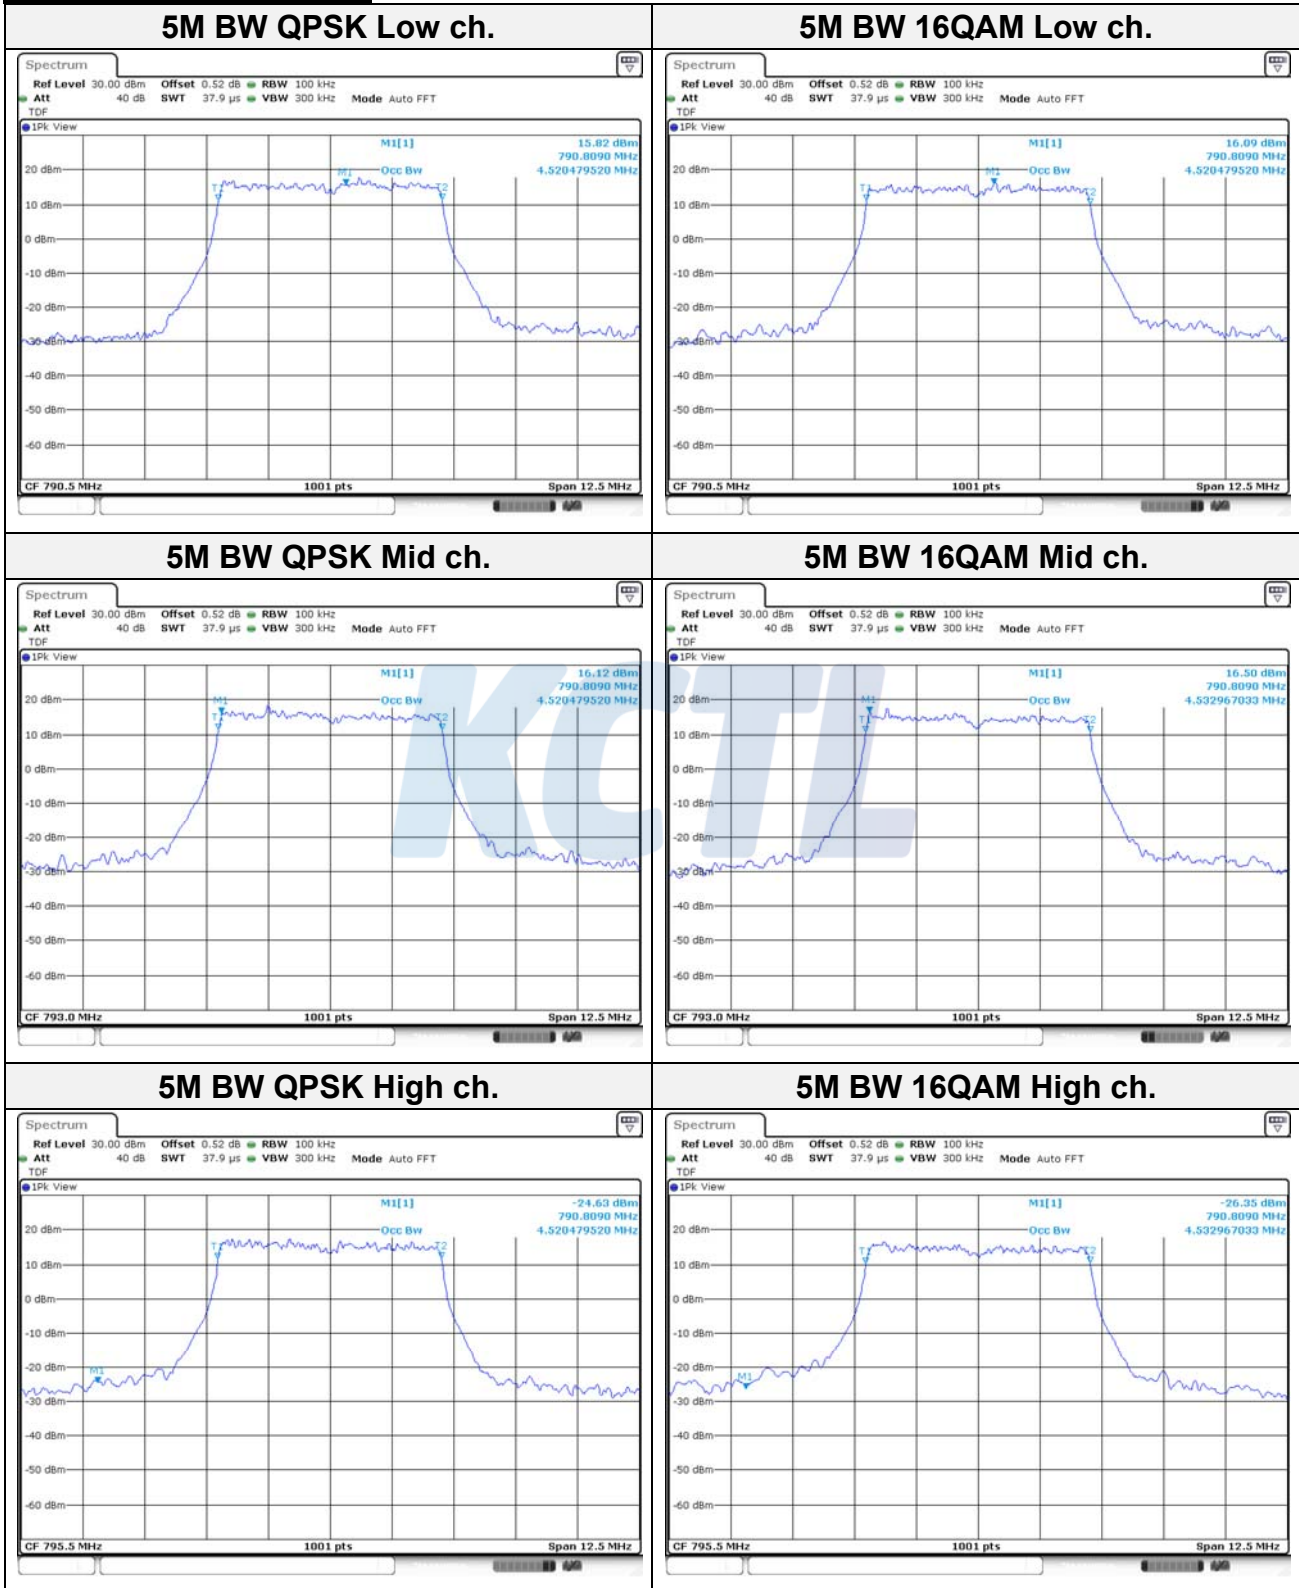

10M BW QPSK Mid ch.

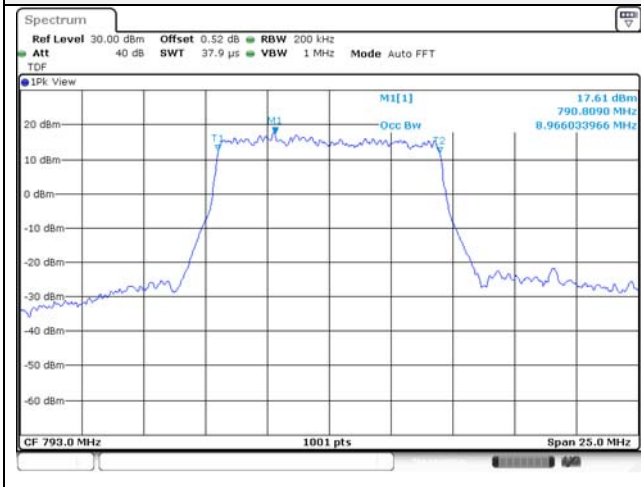

10M BW 16QAM Mid ch.

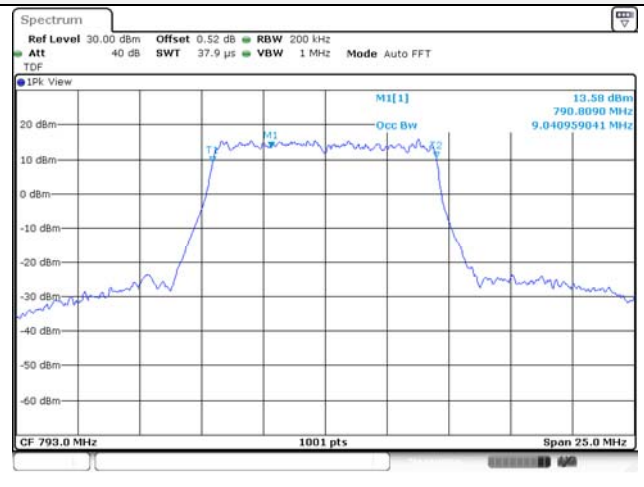


Test mode: LTE Band 26

1.4M BW QPSK Low ch.



1.4M BW 16QAM Low ch.

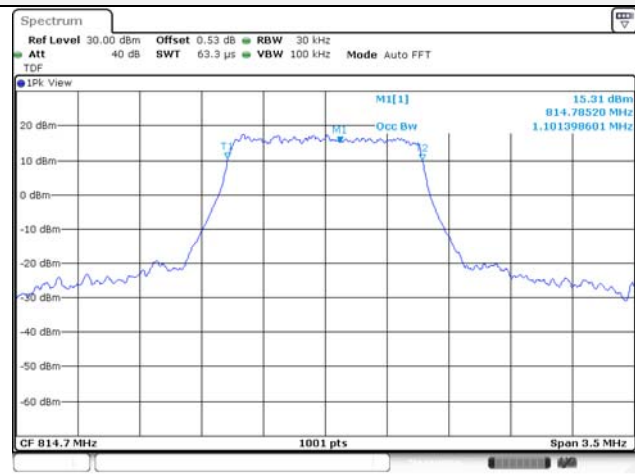


1.4M BW QPSK High ch.




1.4M BW 16QAM High ch.




3M BW QPSK Low ch.

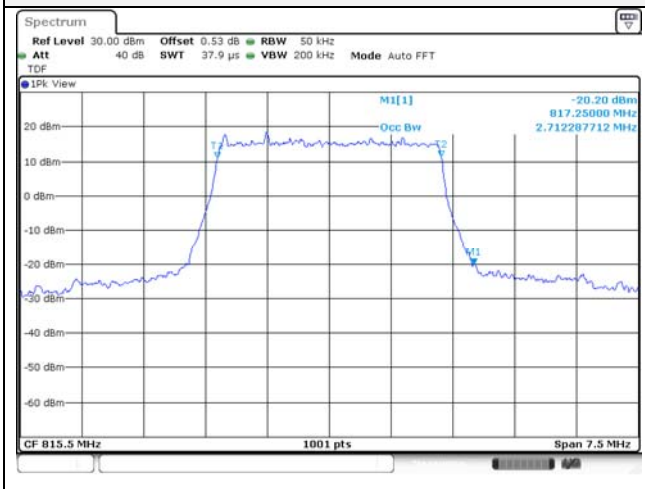

3M BW 16QAM Low ch.

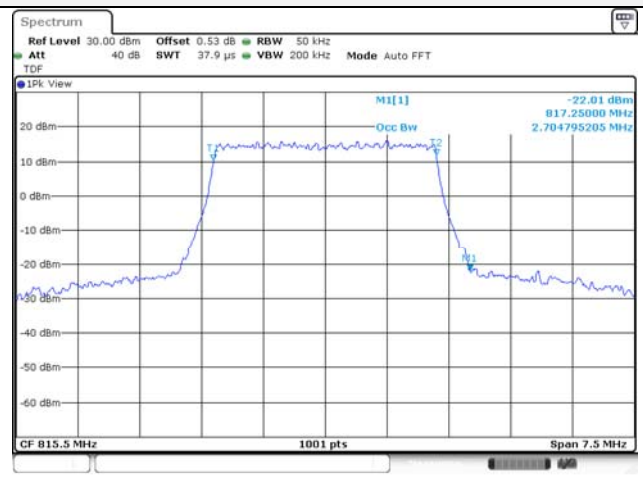

3M BW QPSK High ch.

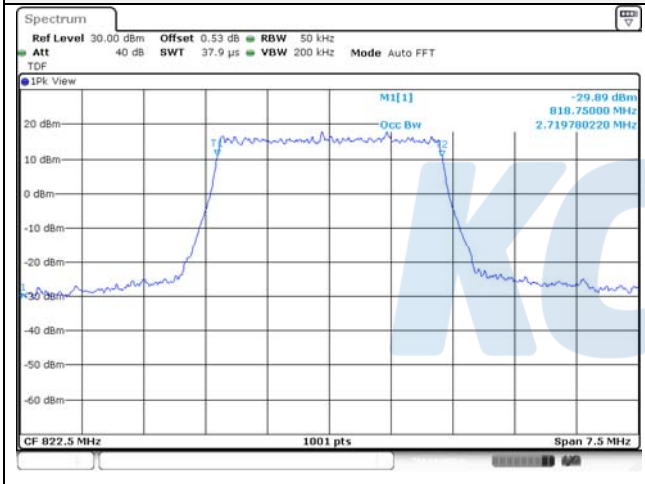


3M BW 16QAM High ch.




5M BW QPSK Low ch.




5M BW 16QAM Low ch.

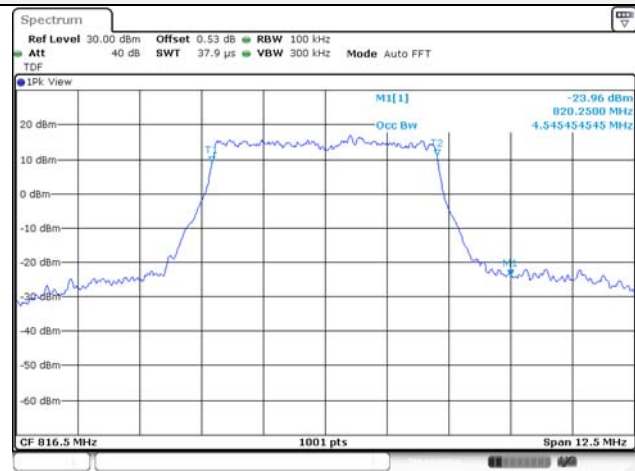


5M BW QPSK High ch.

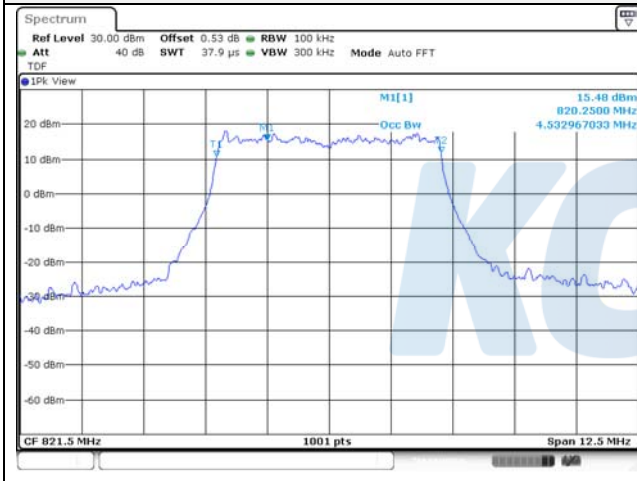


5M BW 16QAM High ch.

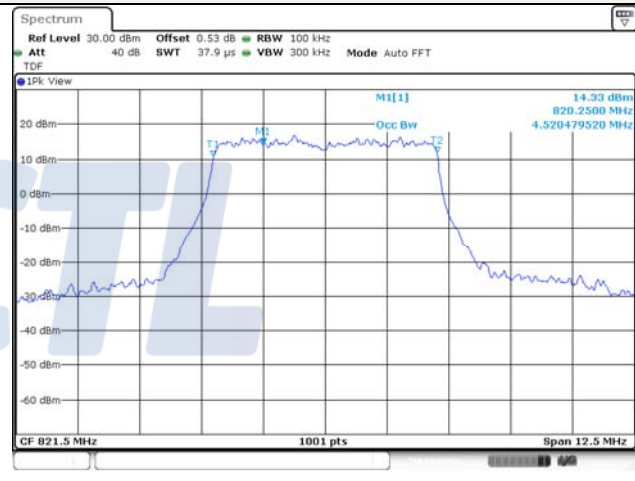


10M BW QPSK Mid ch.

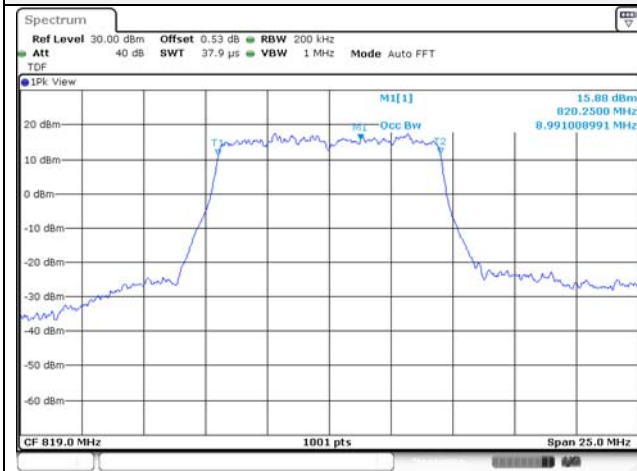

10M BW 16QAM Mid ch.

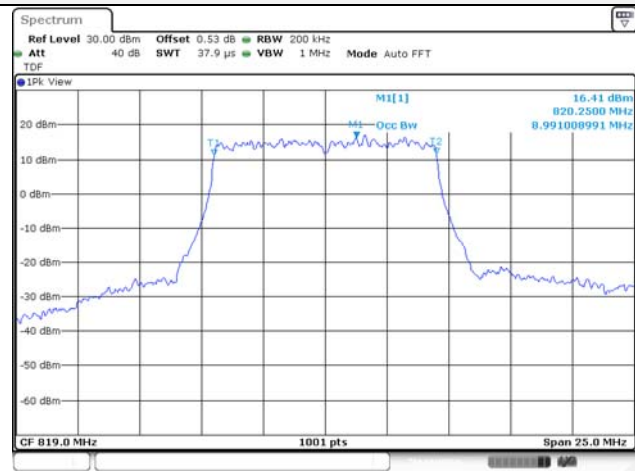

15M BW QPSK Mid ch.

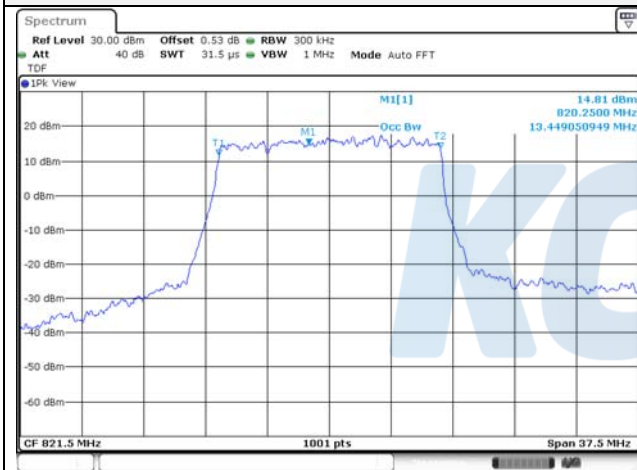


15M BW 16QAM Mid ch.




Straddle channel


1.4M BW QPSK

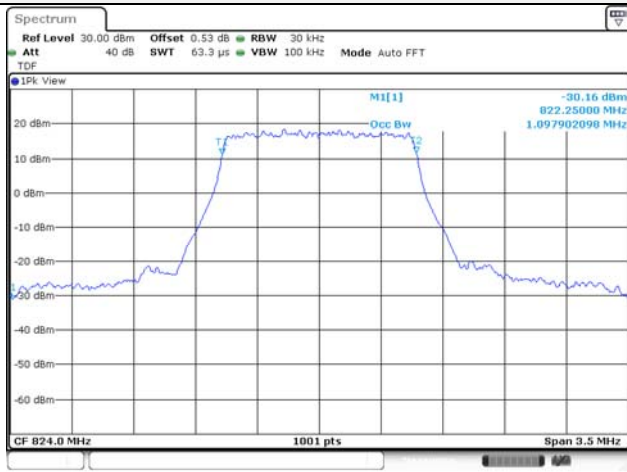

1.4M BW 16QAM

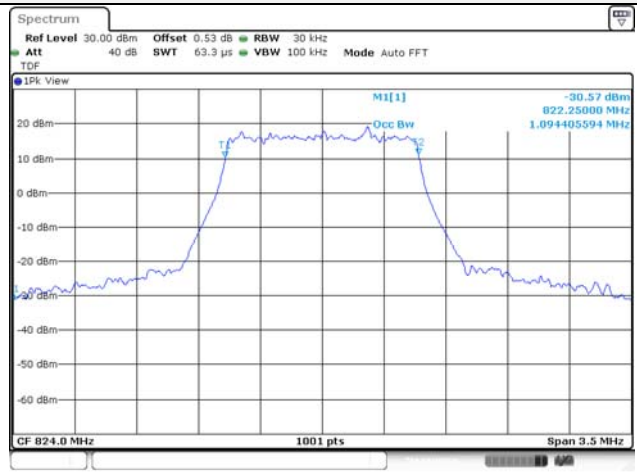


3M BW QPSK

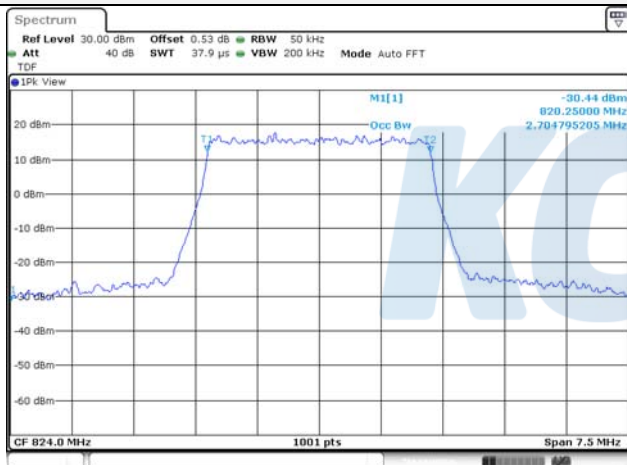


3M BW 16QAM




5M BW QPSK

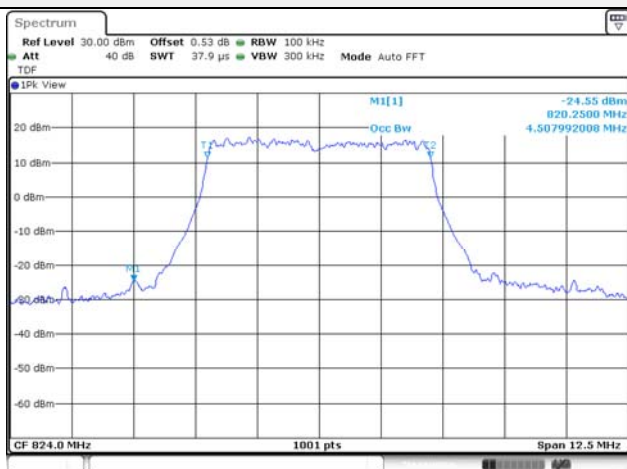


5M BW 16QAM

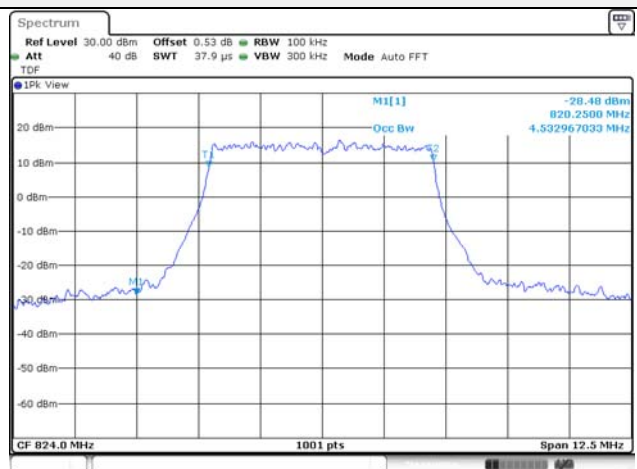


10M BW QPSK

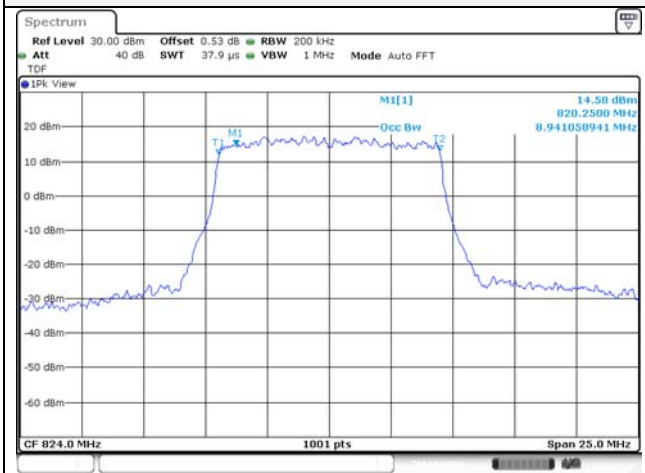


10M BW 16QAM

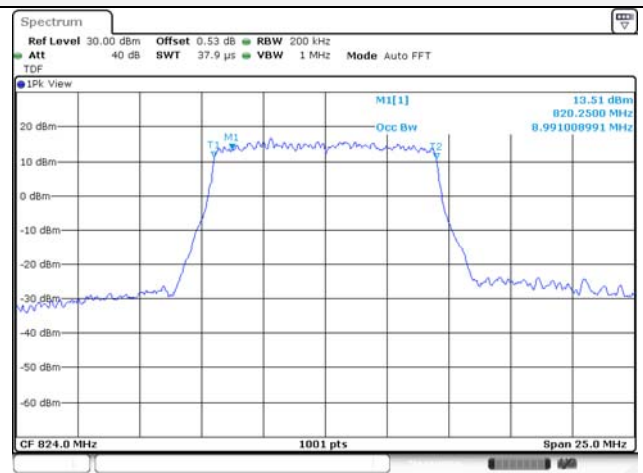

15M BW QPSK

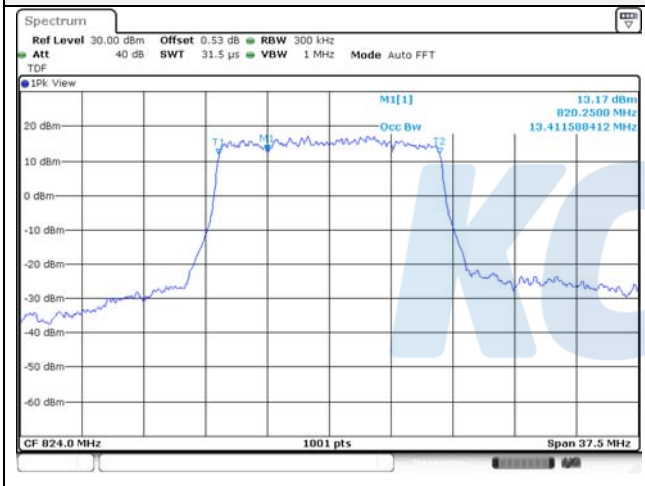


15M BW 16QAM

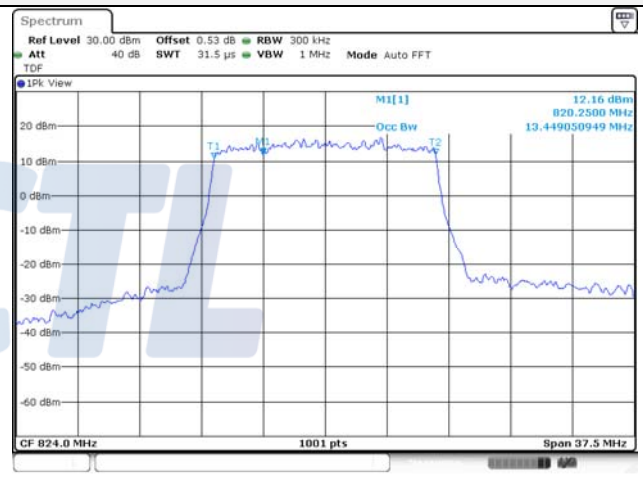

7.3. Spurious Emissions at Antenna Terminal

Test setup

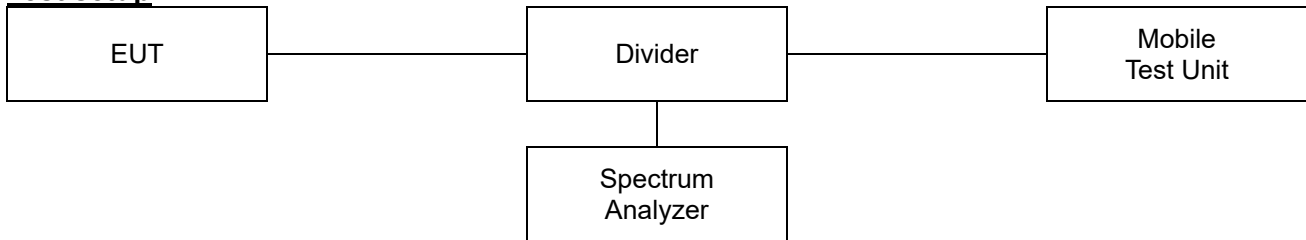

Limit

According to §90.691(a), Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee’s frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

According to §90.543 (e), For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

Test procedure

971168 D01 v03r01 - Section 6
ANSI 63.26-2015 – Section 5.7

Test settings







- 1) Start frequency was set to 30 MHz and stop frequency was set to at least 10th the fundamental frequency.
- 2) Detector = RMS
- 3) Sweep time = auto couple.
- 4) Trace mode = trace average
- 5) Allow trace to fully stabilize.
- 6) Please see test notes below RBW and VBW settings.

Notes:


1. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

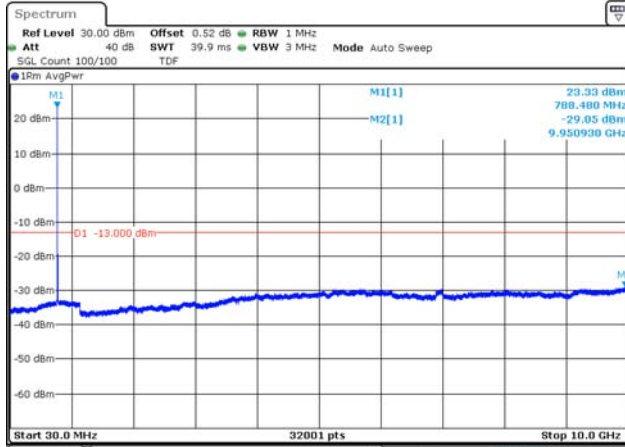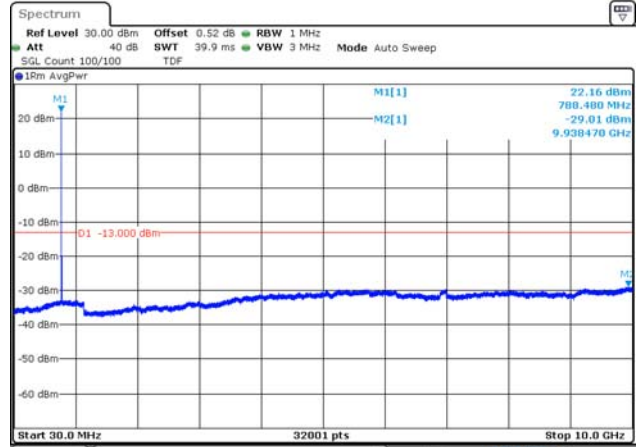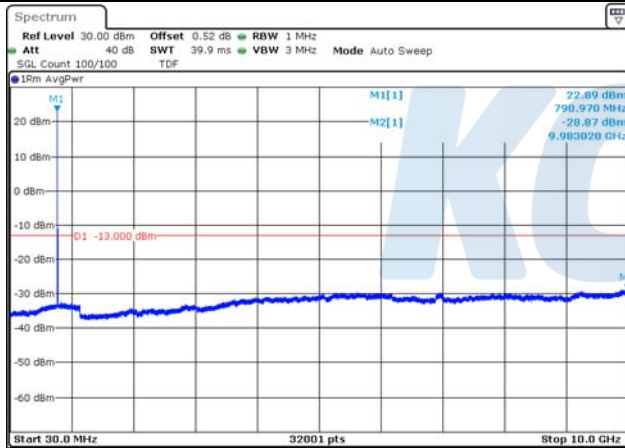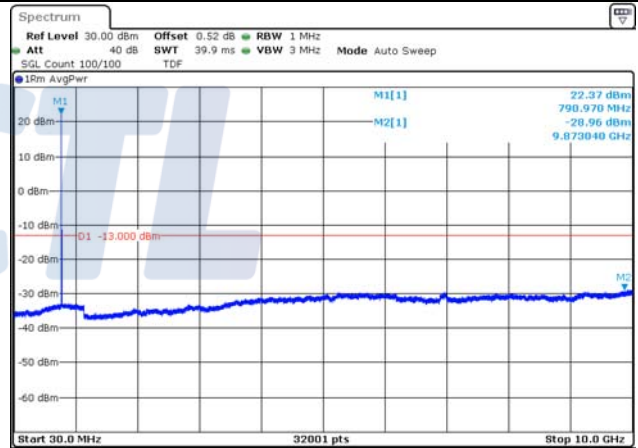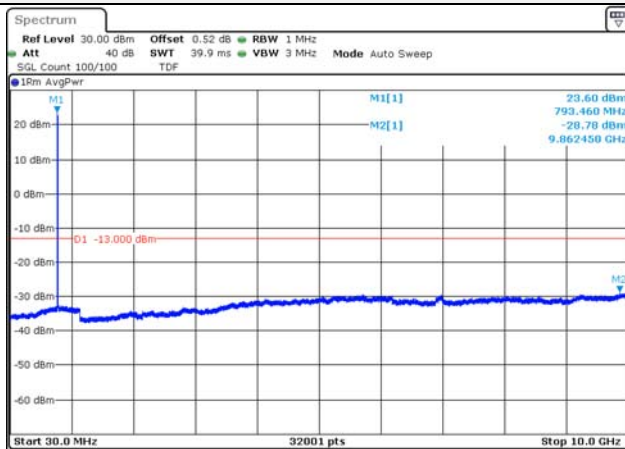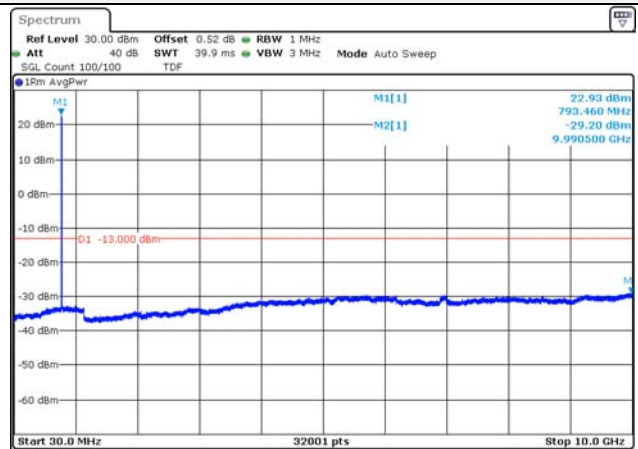


Test results**Test mode: LTE Band 14****5 M BW QPSK Low ch.****5 M BW 16QAM Low ch.****5 M BW QPSK Mid ch.****5 M BW 16QAM Mid ch.****5 M BW QPSK High ch.****5 M BW 16QAM High ch.**

10M BW QPSK Low ch.

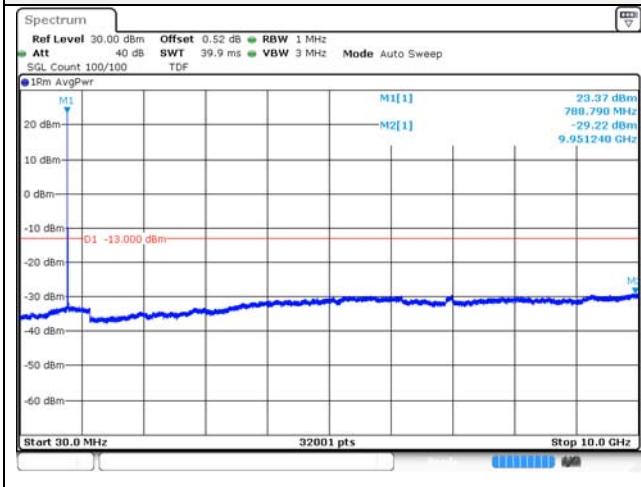


10M BW 16QAM Low ch.

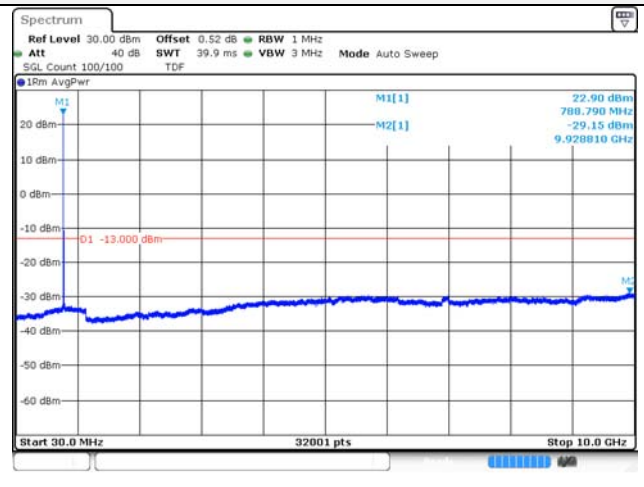


Test mode: LTE Band 26


1.4M BW QPSK Low ch.

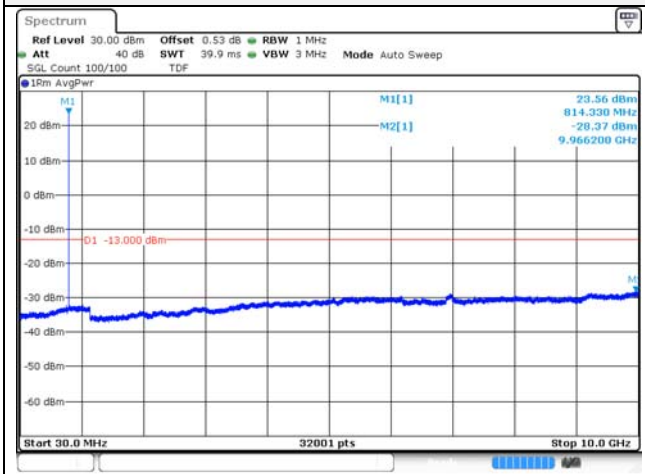


1.4M BW 16QAM Low ch.

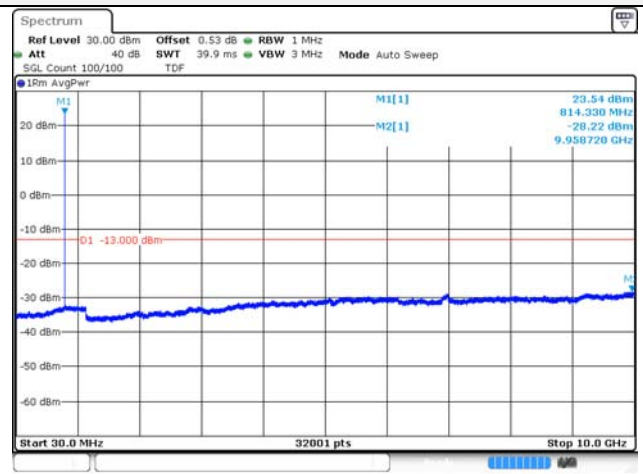


1.4M BW QPSK High ch.

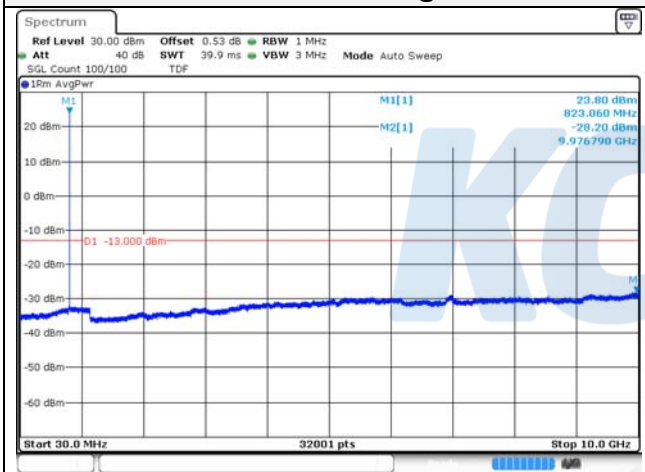


1.4M BW 16QAM High ch.

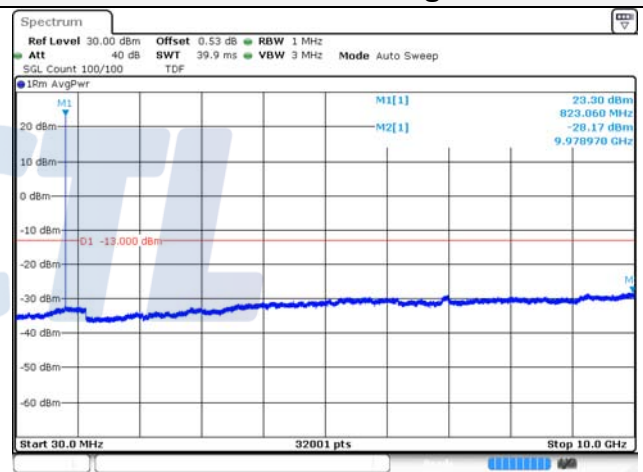


3M BW QPSK Low ch.

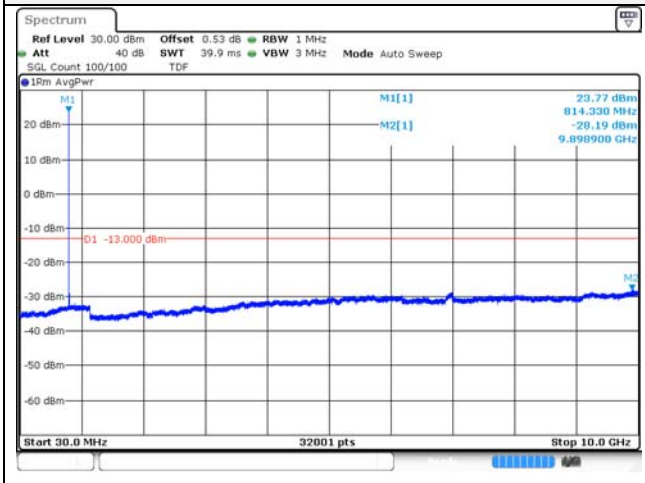


3M BW 16QAM Low ch.

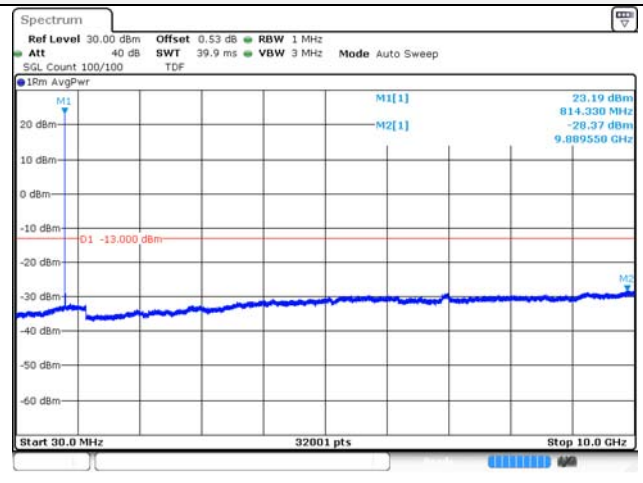


3M BW QPSK High ch.

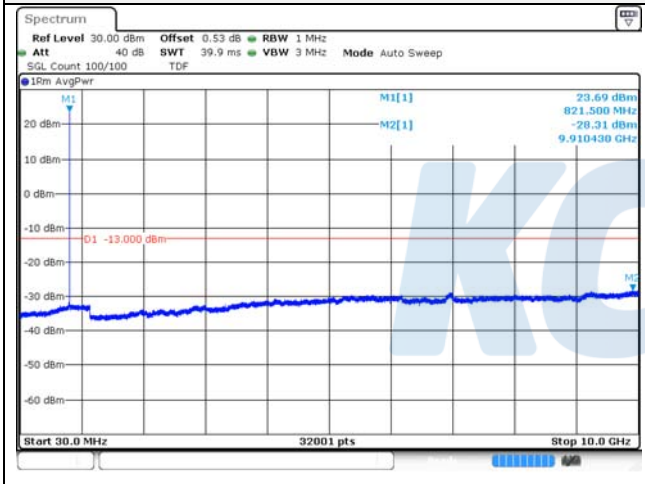


3M BW 16QAM High ch.

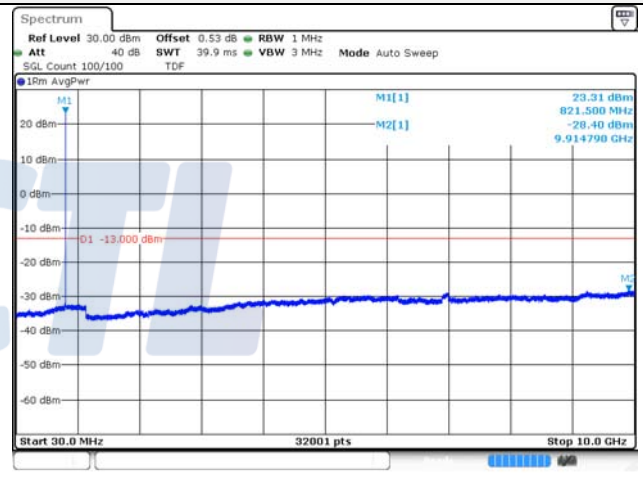


5M BW QPSK Low ch.

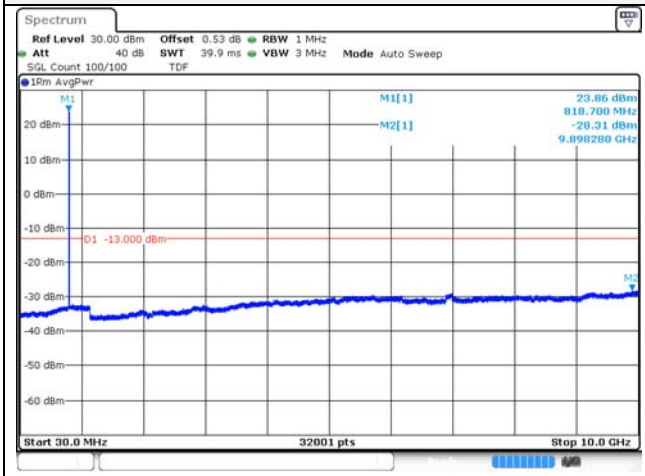


5M BW 16QAM Low ch.

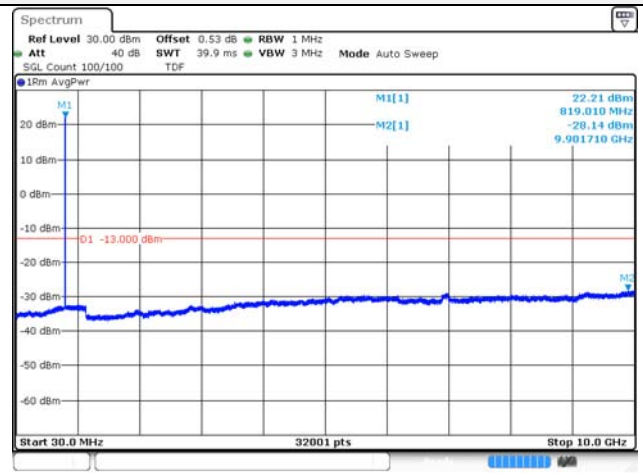


5M BW QPSK High ch.

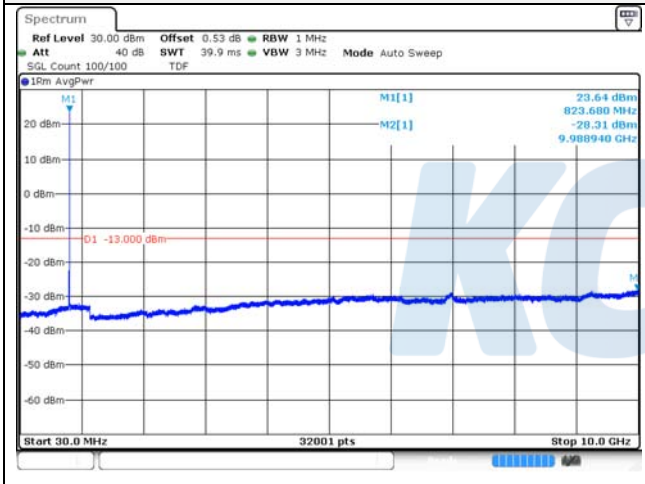


5M BW 16QAM High ch.

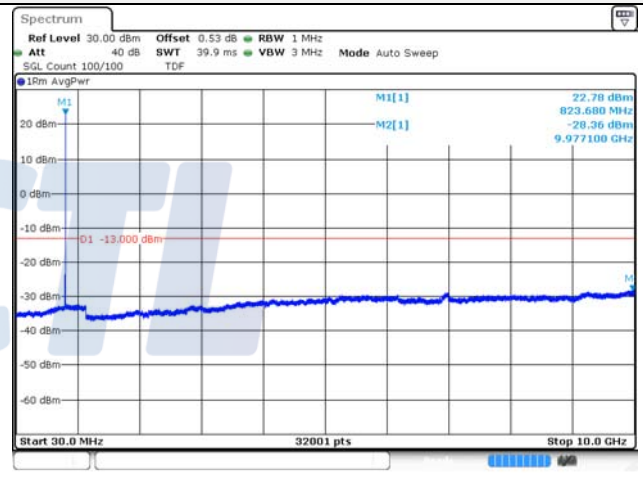


10M BW QPSK Mid ch.

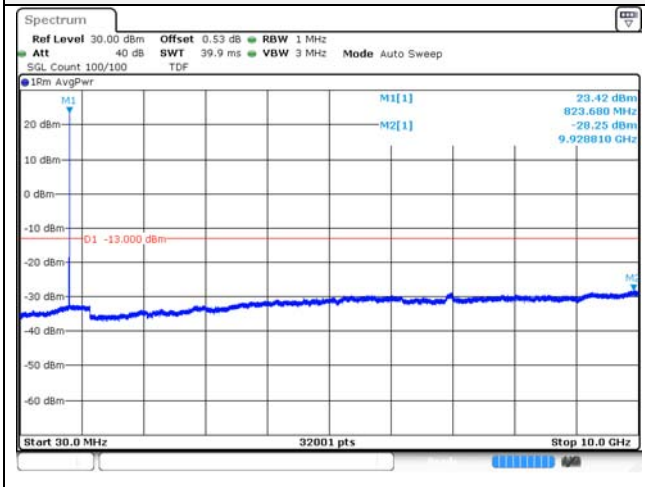


10M BW 16QAM Mid ch.

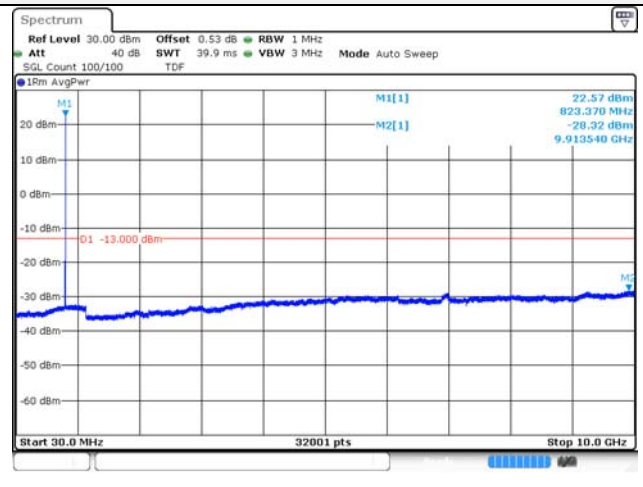

15M BW QPSK Mid ch.

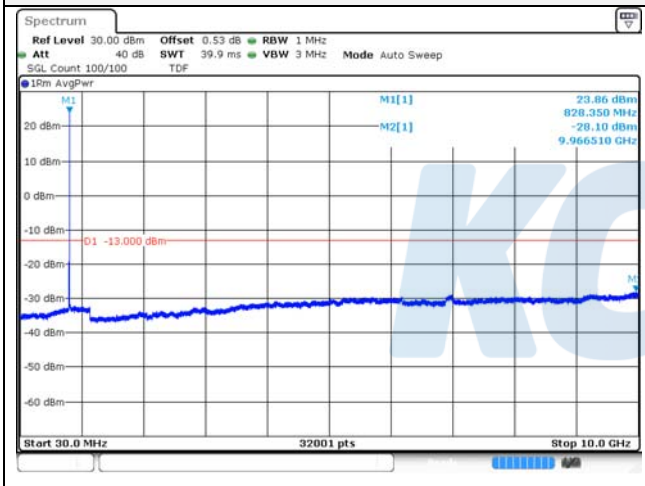


15M BW 16QAM Mid ch.

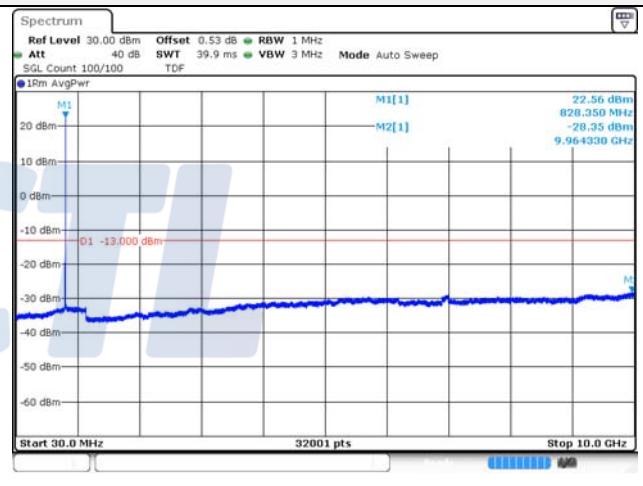

7.4. Band Edge Emissions at Antenna Terminal

Test setup

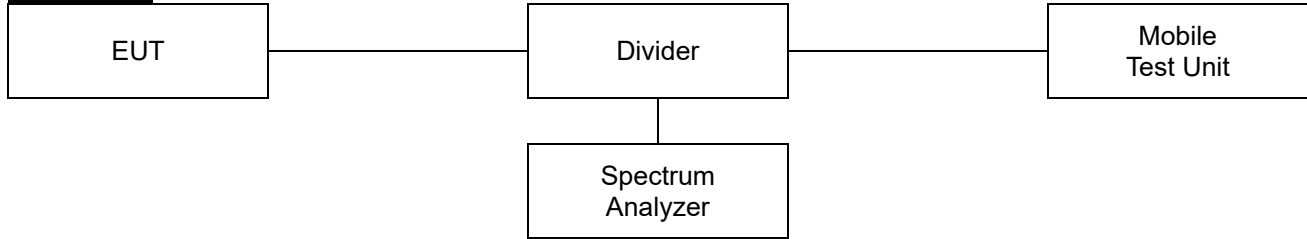

Limit

According to §90.691(a), Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee’s frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee’s frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10\log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

According to §90.543 (e), For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee’s frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.

(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB

(4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

Test procedure

971168 D01 v03r01 - Section 6

ANSI C63.26-2015 – Section 5.7

Test settings

- 1) Start frequency was set to 30 MHz and stop frequency was set to at least 10th the fundamental frequency.
- 2) Span was set large enough so as to capture all out of band emissions near the band edge.
- 3) Set the RBW > 1% of the emission bandwidth.
- 4) Set the VBW $\geq 3 \times$ RBW.
- 5) Set the number of sweep points $\geq 2 \times$ Span/RBW
- 6) Detector = RMS
- 7) Trace mode = trace average
- 8) Sweep time should be auto for peak detection. For RMS detection the sweep time should be set as follows:
 - a) If the device can be configured to transmit continuously (duty cycle $\geq 98\%$), set the (sweep time) > (number of points in sweep) \times (symbol period) (e.g., by a factor of 10 \times symbol period \times number of points) Increasing the sweep time (i.e., slowing the sweep speed) will allow for averaging over multiple symbols.
 - b) If the device cannot transmit continuously (duty cycle < 98%), a gated sweep shall be used when possible (i.e., gate triggered such that the analyzer only sweeps when the device is transmitting at full power), set the sweep time > (number of points in sweep) \times (symbol period) but the sweep time shall always be maintained at a value that is less than or equal to the minimum transmission time
 - c) If the device cannot be configured to transmit continuously (duty cycle > 98%), and a free-running sweep must be used, set the sweep time so that the averaging is performed over multiple on/off cycles by setting the sweep time > (number of points in sweep) \times (transmitter period) (i.e., the transmit on-time + the off-time). The spectrum analyzer readings shall subsequently be corrected by $[10 \log (1/\text{duty cycle})]$. This assumes that the transmission period and duty cycle is relatively constant (duty cycle variation $\leq \pm 2\%$).
 - d) If the device cannot be configured to transmit continuously and a free-running sweep must be used, and if the transmissions exhibit a non-constant duty cycle (duty cycle variations > $\pm 2\%$), set the sweep time so that the averaging is performed over the on-period by setting the sweep time > (symbol period) \times (number of points), while also maintaining the sweep time < (transmitter on-time). The trace mode shall be set to max hold, since not every display point will be averaged only over just the on-time. Thus, multiple sweeps (e.g., 100) in maximum hold are necessary to ensure that the maximum power is measured.
- 9) Allow trace to fully stabilize.

Notes:


1. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
2. The EUT was setup to maximum output power as its lowest and highest channel with all bandwidth, modulation and RB configurations.

KCTL

Test results

Test mode: LTE Band 14


5M BW QPSK Low ch. 1RB

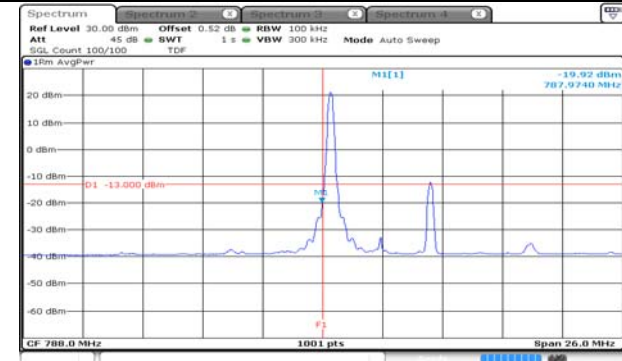


5M BW QPSK High ch. 1RB




5M BW QPSK Low ch. FRB

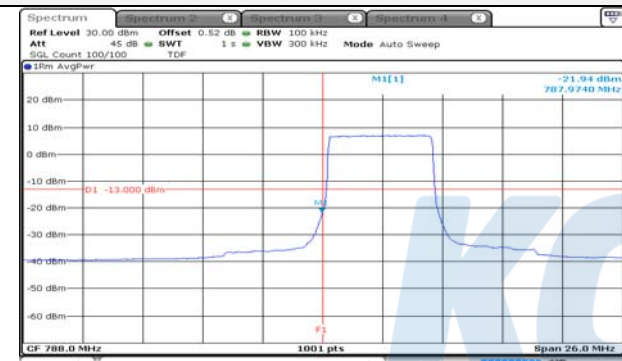

5M BW QPSK High ch. FRB

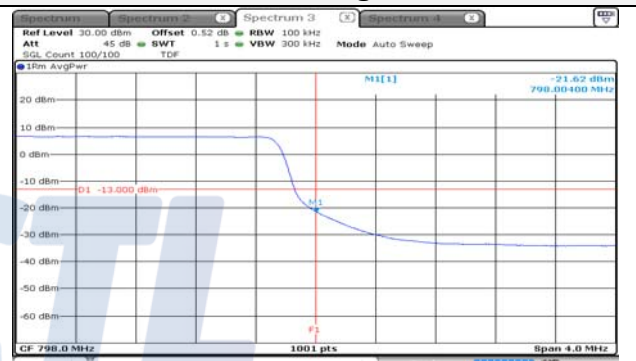


5M BW 16QAM Low ch. 1RB

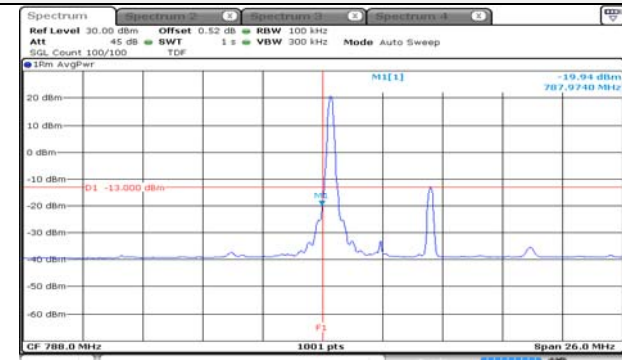


5M BW 16QAM High ch. 1RB




5M BW 16QAM Low ch. FRB

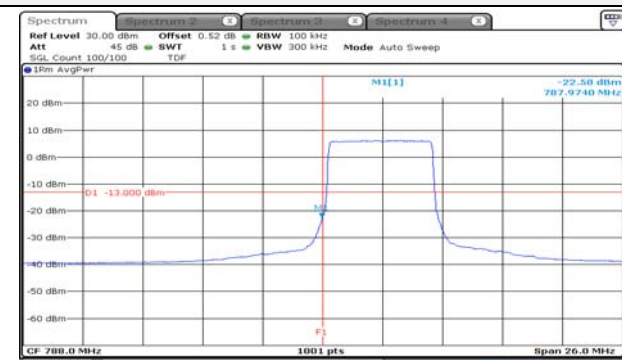


5M BW 16QAM High ch. FRB

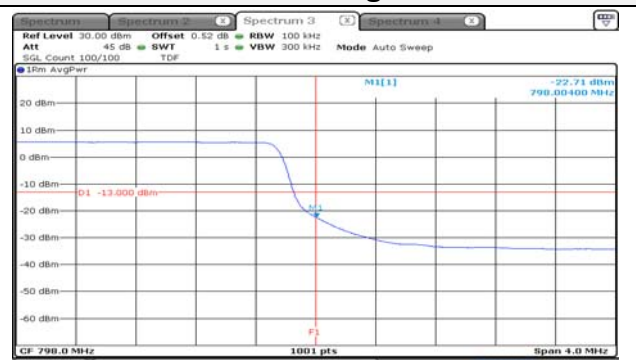


5M BW QPSK Lower extended 1RB

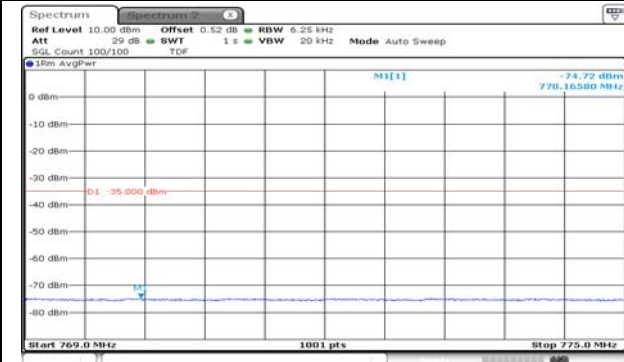


5M BW QPSK Upper extended 1RB

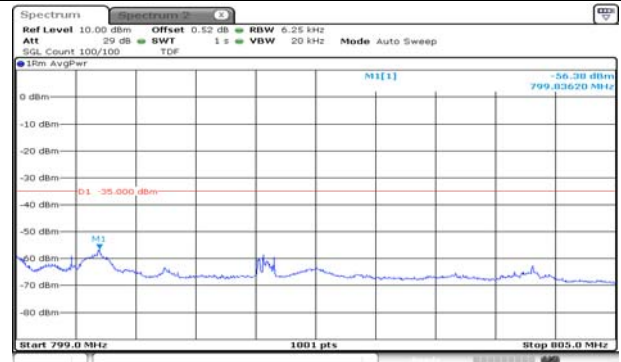


5M BW QPSK Lower extended FRB

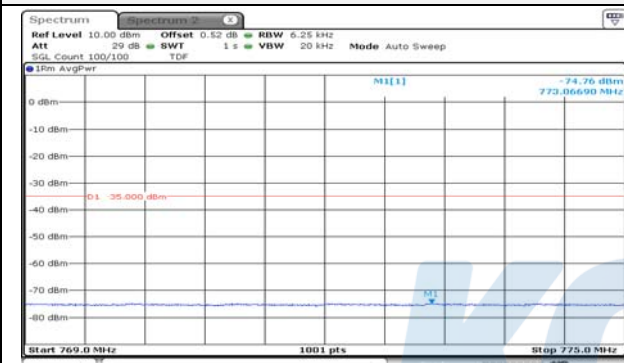


5M BW QPSK Upper extended FRB

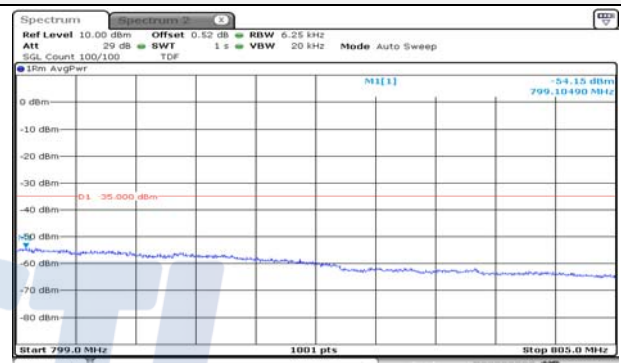


5M BW 16QAM Lower extended 1RB

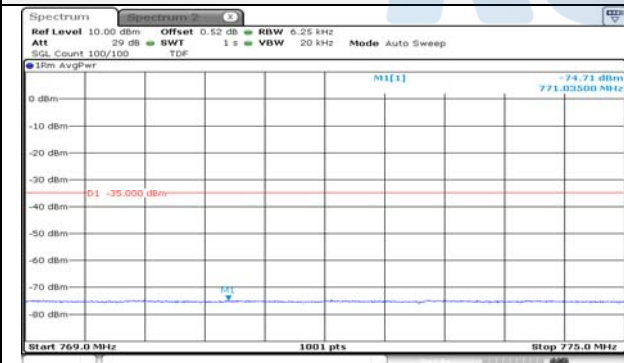


5M BW 16QAM Upper extended 1RB

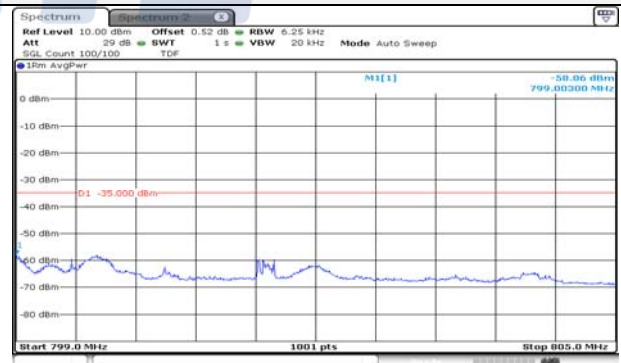


5M BW 16QAM Lower extended FRB

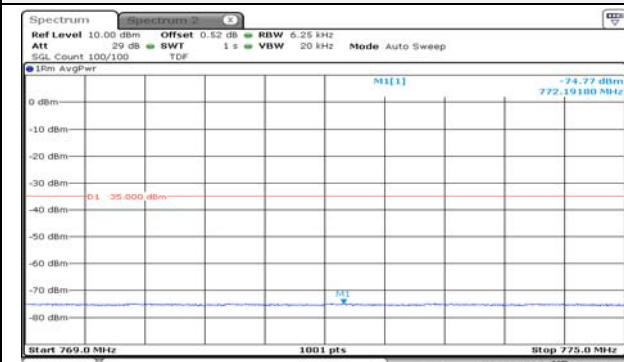

5M BW 16QAM Upper extended FRB

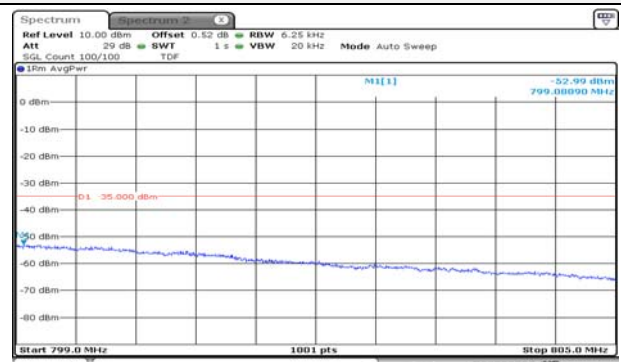

10M BW QPSK Lower 1RB

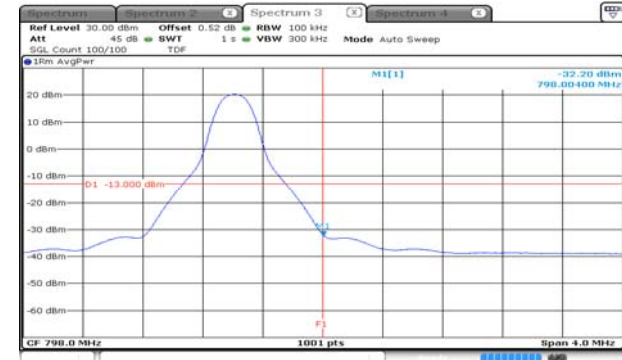

10M BW QPSK Upper 1RB




10M BW QPSK Lower FRB




10M BW QPSK Upper FRB




10M BW 16QAM Lower 1RB

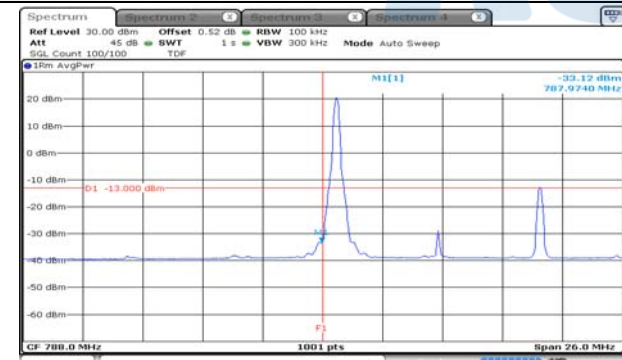


10M BW 16QAM Upper 1RB

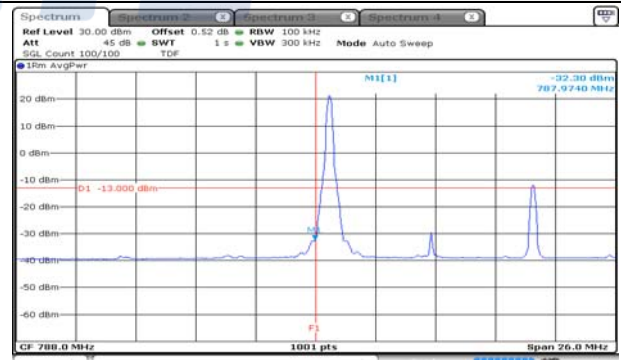


10M BW 16QAM Lower FRB

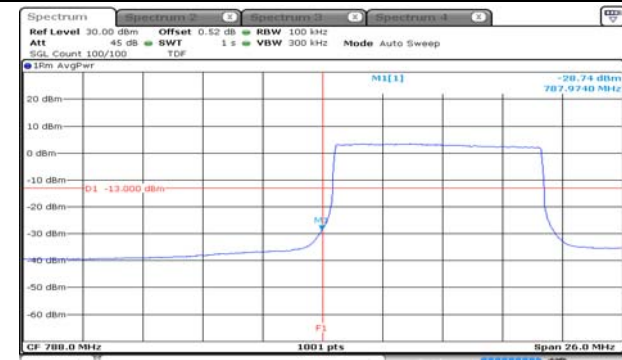


10M BW 16QAM Upper FRB

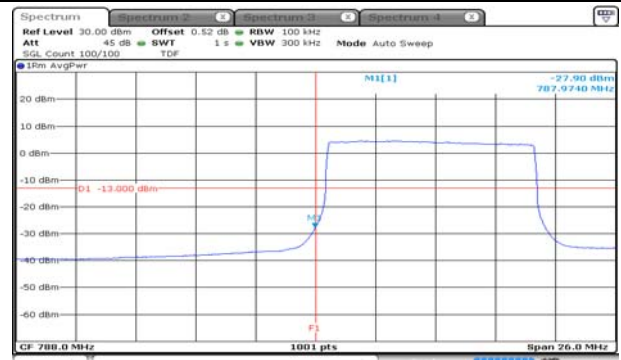


10M BW QPSK Lower extended 1RB

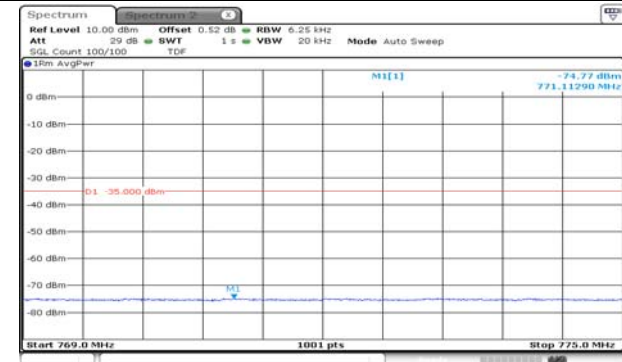

10M BW QPSK Upper extended 1RB

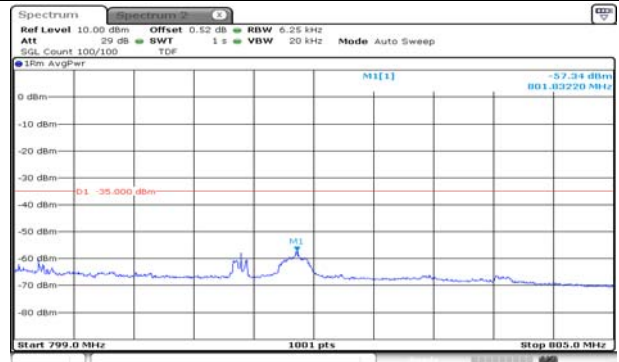


10M BW QPSK Lower extended FRB

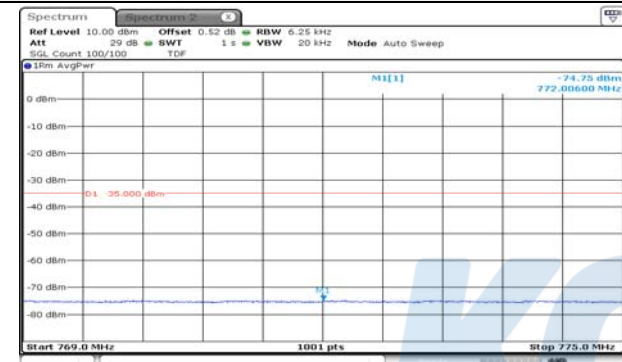


10M BW QPSK Upper extended FRB




10M BW 16QAM Lower extended 1RB

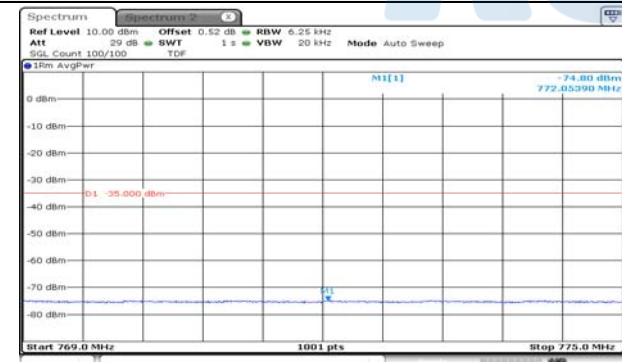

10M BW 16QAM Upper extended 1RB

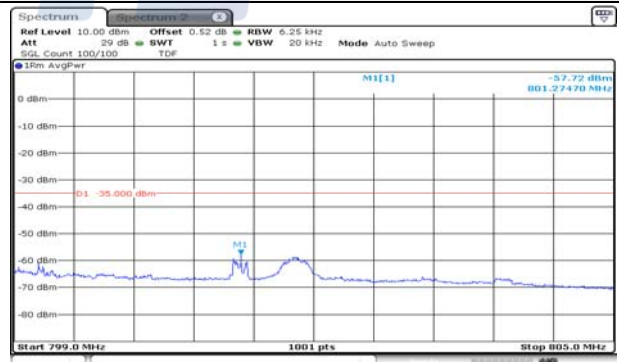

10M BW 16QAM Lower extended FRB

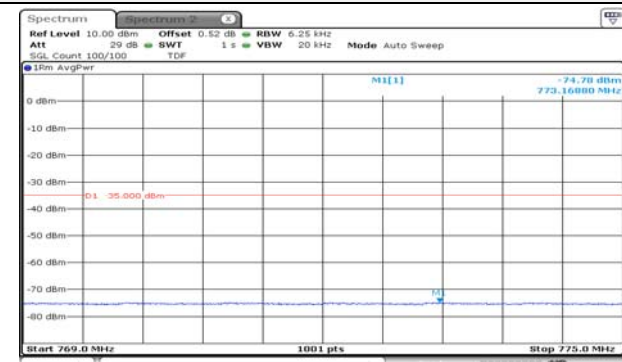

10M BW 16QAM Upper extended FRB

