

# TEST REPORT

FCC 2G3G Test for SM-X526B  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2502-FC036

**DATE OF ISSUE**  
February 17, 2025

**Tested by**  
Jae Ryang Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO

**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

**REPORT NO.**

HCT-RF-2502-FC036

**DATE OF ISSUE**

February 17, 2025

**Applicant****SAMSUNG Electronics Co., Ltd.**

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name**

Tablet

**Model Name**

SM-X526B

**Date of Test**

December 26, 2024 ~ February 12, 2025

**FCC ID**

A3LSMX526B

**Location of Test**

☒ Permanent Testing Lab ☐ On Site Testing

(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

**FCC Classification:**

PCS Licensed Transmitter (PCB)

**Test Standard Used**

FCC Rule Part: § 22, § 24, § 27

**Test Results**

PASS

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	February 17, 2025	Initial Release

## Notice

### Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER .....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION .....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS .....	8
3.1 TEST PROCEDURE .....	8
3.2 RADIATED POWER .....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO .....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 BAND EDGE .....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	17
3.9 WORST CASE(CONDUCTED TEST) .....	18
3.10 WORST CASE(RADIATED TEST) .....	19
4. LIST OF TEST EQUIPMENT .....	20
5. MEASUREMENT UNCERTAINTY .....	21
6. SUMMARY OF TEST RESULTS .....	22
7. SAMPLE CALCULATION .....	23
8. TEST DATA .....	25
8.1 EFFECTIVE RADIATED POWER .....	25
8.2 EQUIVALENT ISOTROPIC RADIATED POWER .....	26
8.3 RADIATED SPURIOUS EMISSIONS .....	27
8.4 PEAK-TO-AVERAGE RATIO .....	32
8.5 OCCUPIED BANDWIDTH .....	33
8.6 CONDUCTED SPURIOUS EMISSIONS .....	34
8.7 BAND EDGE .....	34
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	35
9. TEST PLOTS .....	46
10. ANNEX A_ TEST SETUP PHOTO .....	135

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMX526B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter (PCB)
<b>FCC Rule Part(s):</b>	§ 22, § 24, § 27
<b>EUT Type:</b>	Tablet
<b>Model(s):</b>	SM-X526B
<b>Tx Frequency:</b>	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700)
<b>Rx Frequency:</b>	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700)
<b>Date(s) of Tests:</b>	December 26, 2024 ~ February 12, 2025
<b>Serial number:</b>	Radiated : R32XC00B7ZP Conducted : R32XC00AZFB

## 1.1. MAXIMUM OUTPUT POWER

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	249KGXW	1.622	32.10
GSM850 EDGE			252KG7W	0.359	25.55
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M18F9W	0.216	23.34

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	246KGXW	1.256	30.99
GSM1900 EDGE			251KG7W	0.385	25.85
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M19F9W	0.282	24.51
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M17F9W	0.313	24.96

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6.  
It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80), Bluetooth, BT LE, Digitizer.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Radiated Power	- ANSI C63.26-2015 – Section 5.2.4.4 - KDB 971168 D01 v03r01 – Section 5.8
Radiated Spurious and Harmonic Emissions	- ANSI C63.26-2015 – Section 5.5.3 - KDB 971168 D01 v03r01 – Section 5.8



### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: :  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

### 3.4 PEAK- TO- AVERAGE RATIO

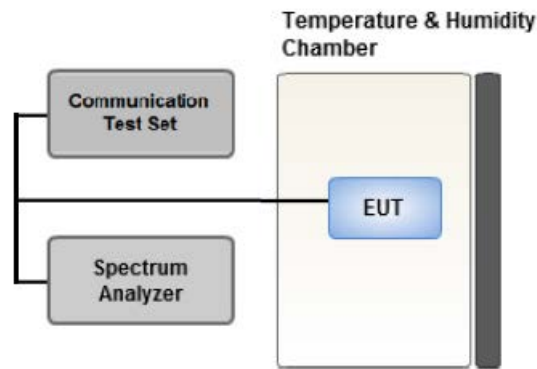

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .  
 Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \times \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \times \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

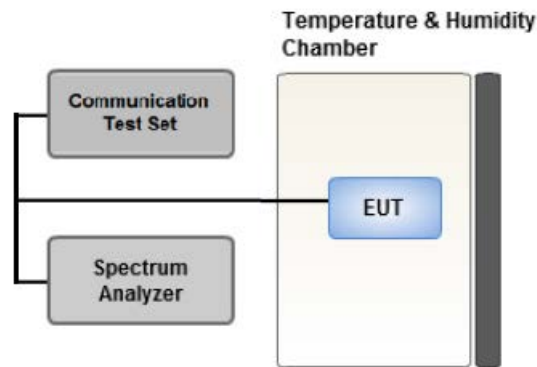

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

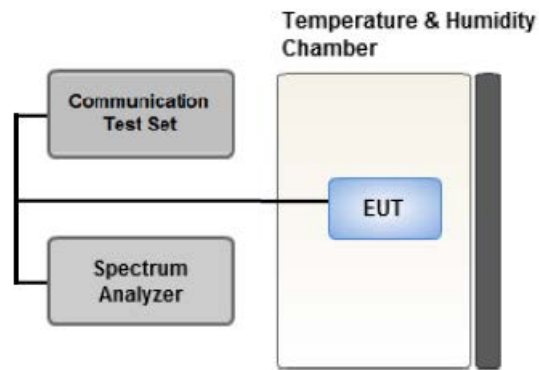

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings(GSM)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

#### Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = Max Hold
5. Sweep time = auto
6. Number of points in sweep  $\geq 2 \times \text{Span} / \text{RBW}$

### 3.7 BAND EDGE

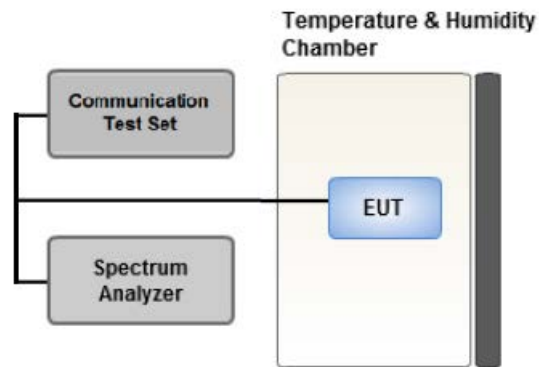

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Notes**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \times \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where  $\text{Margin} < 1$  dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

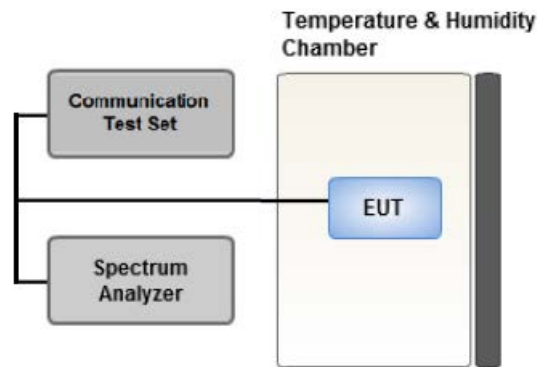

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Test Channel
Occupied Bandwidth	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, Mid, High
Band Edge	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Low, High
Peak-To-Average Ratio	GSM : Voice & EDGE(1 TX Slot) WCDMA : QPSK(RMC)	Mid
Spurious and Harmonic Emissions at Antenna Terminal	GSM : Voice WCDMA : QPSK(RMC)	Low, Mid, High

[ Test Channel ]

	Uplink Channel				
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	128	512	9262	1312	4132
Mid	190	661	9400	1412	4183
High	251	810	9538	1513	4233

### 3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
Worst case : Stand alone
- All simultaneous transmission scenarios of operation were investigated, and the test results showed no additional significant emissions relative to the least restrictive limit were observed.  
Therefore, only the worst case(stand-alone) results were reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[ Worst case\_3G ]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : X WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : Z WCDMA B5 : Z	Low, Mid, High

[ Worst case\_2G ]

Test Description	Modulation	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : X GSM1900 : X	Low, Mid, High
	EDGE (1 TX Slot)	GSM850 : X GSM1900 : X	GSM 850 : High GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : X GSM1900 : Z	Low, Mid, High

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	Switch box(1 G HPF+LNA)	HCT CO., LTD.,	F2L2	12/12/2025	Annual
RF Switching System	Switch box(3 G HPF+LNA)	HCT CO., LTD.,	F2L3	12/12/2025	Annual
RF Switching System	Switch box(LNA)	HCT CO., LTD.,	F2L5	12/12/2025	Annual
RF Switching System	Switch box(6 G HPF+LNA)	HCT CO., LTD.,	F2L14	12/12/2025	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/07/2025	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	08/06/2025	Annual
Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Dipole Antenna	UHAP	Schwarzbeck	01288	08/07/2026	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03197	11/28/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	03201	11/28/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/20/2026	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	ROHDE & SCHWARZ	101733	09/19/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/05/2025	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/28/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	08/19/2026	Biennial
Radio Communication Test Station	MT8000A	Anritsu Corp.	6272613402	08/28/2025	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/26/2025	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
Signal & Spectrum Analyzer (2 Hz~67 GHz)	FSW67	REOHDE & SCHWARZ	101736	05/23/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ kHz)
Occupied Bandwidth	95 (Confidence level about 95 %, $k=2$ )
Frequency stability	28 (Confidence level about 95 %, $k=2$ )

Parameter	Expanded Uncertainty ( $\pm$ dB)
Block Edge	0.70 (Confidence level about 95 %, $k=2$ )
Conducted Spurious Emissions	1.18 (Confidence level about 95 %, $k=2$ )
Peak- to- Average Ratio	0.68 (Confidence level about 95 %, $k=2$ )
Radiated Power	4.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log <sub>10</sub> (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 22.913(d), § 24.232(d), § 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 22.355	< 2.5 ppm	PASS
	§ 24.235, § 27.54	Emission must remain in band	PASS

#### Note:

1. See SAR Report

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§ 22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§ 24.232(c), § 27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 22.917(a), § 24.238(a), § 27.53(h)	< 43 + 10 x log <sub>10</sub> (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand



## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
GSM850	128	824.2	-20.46	42.54	-9.95	1.44	H	< 7.00	1.303	31.15
	190	836.6	-19.88	42.98	-9.90	1.45	H		1.456	31.63
	251	848.8	-19.66	43.40	-9.85	1.45	H		1.622	32.10
EDGE	251	848.8	-26.21	36.85	-9.85	1.45	H		0.359	25.55

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-28.25	34.66	-9.95	1.44	H	< 7.00	0.212	23.27
	4183	836.6	-28.17	34.69	-9.90	1.45	H		0.216	23.34
	4233	846.6	-28.82	34.47	-9.85	1.45	H		0.207	23.17

## 8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-11.99	22.91	10.15	2.07	H	< 2.00	1.256	30.99
	661	1880.0	-13.34	22.03	10.11	2.21	H		0.984	29.93
	810	1909.8	-13.88	21.60	10.03	2.17	H		0.883	29.46
EDGE	512	1850.2	-17.13	17.77	10.15	2.07	H		0.385	25.85

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-18.47	16.43	10.15	2.07	H	< 2.00	0.283	24.51
	9400	1880.0	-19.08	16.29	10.11	2.21	H		0.262	24.19
	9538	1907.6	-19.67	15.81	10.03	2.17	H		0.233	23.67

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-17.30	17.21	9.81	2.06	H	< 1.00	0.313	24.96
	1412	1732.4	-17.66	16.61	9.91	2.08	H		0.278	24.44
	1513	1752.6	-17.79	16.46	10.02	2.08	H		0.275	24.40

### 8.3 RADIATED SPURIOUS EMISSIONS

■ MODULATION SIGNAL: GSM850  
 ■ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1,648.40	-39.79	9.44	-54.73	2.02	H	-47.31	-13.00
	2,472.60	-45.85	10.34	-57.02	2.57	H	-49.25	-13.00
	3,296.80	-52.60	11.06	-60.76	2.95	H	-52.65	-13.00
190 (836.6)	1,673.20	-40.67	9.60	-55.94	2.05	H	-48.39	-13.00
	2,509.80	-44.52	10.26	-55.80	2.51	H	-48.05	-13.00
	3,346.40	-53.49	11.10	-62.15	2.96	H	-54.01	-13.00
251 (848.8)	1,697.60	-39.77	9.76	-54.94	2.07	H	-47.25	-13.00
	2,546.40	-42.33	10.25	-53.37	2.53	H	-45.65	-13.00
	3,395.20	-53.54	11.20	-62.43	2.98	H	-54.21	-13.00

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3,700.40	-54.12	11.83	-61.74	3.07	H	-52.98	-13.00
	5,550.60	-54.89	12.07	-56.59	3.89	H	-48.41	-13.00
	7,400.80	-55.34	11.04	-51.12	4.58	H	-44.66	-13.00
661 (1880.0)	3,760.00	-53.21	11.61	-59.70	3.12	H	-51.21	-13.00
	5,640.00	-55.04	12.03	-56.10	3.92	V	-47.99	-13.00
	7,520.00	-54.41	11.49	-50.72	4.61	H	-43.84	-13.00
810 (1909.8)	3,819.60	-54.31	11.32	-60.56	3.19	H	-52.43	-13.00
	5,729.40	-54.83	11.80	-55.55	4.00	H	-47.75	-13.00
	7,639.20	-54.73	11.56	-50.66	4.68	V	-43.78	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4132 (826.4)	1,652.80	-51.77	9.47	-66.80	2.02	H	-59.35	-13.00
	2,479.20	-53.04	10.32	-64.18	2.55	H	-56.41	-13.00
	3,305.60	-53.64	11.09	-60.87	4.00	V	-53.78	-13.00
4183 (836.6)	1,673.20	-51.08	9.60	-66.35	2.05	V	-58.80	-13.00
	2,509.80	-53.01	10.26	-64.29	2.51	H	-56.54	-13.00
	3,346.40	-53.08	11.10	-61.74	2.96	V	-53.60	-13.00
4233 (846.6)	1,693.20	-51.60	9.73	-66.82	2.07	V	-59.16	-13.00
	2,539.80	-52.61	10.25	-63.71	2.53	V	-55.99	-13.00
	3,386.40	-53.30	11.18	-62.25	2.99	H	-54.06	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3 704.80	-53.80	11.82	-61.30	3.08	H	-52.56	-13.00
	5 557.20	-55.03	12.07	-56.69	3.88	H	-48.50	-13.00
	7 409.60	-55.29	11.09	-51.35	4.57	V	-44.83	-13.00
9400 (1880.0)	3 760.00	-54.43	11.61	-60.92	3.12	V	-52.43	-13.00
	5 640.00	-55.60	12.03	-56.66	3.92	H	-48.55	-13.00
	7 520.00	-54.94	11.49	-51.25	4.61	V	-44.37	-13.00
9538 (1907.6)	3 815.20	-54.06	11.34	-60.36	3.20	H	-52.22	-13.00
	5 722.80	-54.76	11.82	-55.55	4.00	V	-47.73	-13.00
	7 630.40	-54.71	11.56	-50.75	4.66	V	-43.85	-13.00

▣ MODULATION SIGNAL: WCDMA1700

▣ DISTANCE: 3 meters

Ch.	Freq. (MHz)	<u>Measured</u> <u>Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3 424.80	-53.87	11.33	-61.45	2.99	V	-53.11	-13.00
	5 137.20	-54.70	11.25	-56.36	3.81	V	-48.92	-13.00
	6 849.60	-55.44	11.07	-51.59	4.36	H	-44.88	-13.00
1412 (1732.4)	3 464.80	-53.21	11.50	-61.25	3.02	V	-52.77	-13.00
	5 197.20	-54.92	11.41	-56.83	3.79	V	-49.21	-13.00
	6 929.60	-56.10	11.14	-52.46	4.40	H	-45.72	-13.00
1513 (1752.6)	3 505.20	-53.99	11.59	-62.13	3.05	V	-53.59	-13.00
	5 257.80	-54.61	11.60	-56.00	3.79	H	-48.19	-13.00
	7 010.40	-54.89	11.07	-51.69	4.42	H	-45.04	-13.00

#### 8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured $P_{Pk}$ (dBm)	Measured $P_{Avg}$ (dBm)	$P_{Avg}$ (Duty Cycle)			$P.A.R.$ $= P_{Pk} - P_{Avg}$ (dB)	Limit (dB)	Pass / Fail
				$T_{XTotal}$ (ms)	$T_{XOn}$ (ms)	Factor (dB)			
GSM1900	661	30.559	21.12	4.616	0.5475	9.26	0.18	13	Pass
GSM1900 EDGE	661	29.198	16.46	4.616	0.5475	9.26	3.48		
GSM850	190	CCDF Procedure					3.83		
GSM850 EDGE	190						6.35		
WCDMA850	4408						3.43		
WCDMA1900	9400						2.72		
WCDMA1700	1412						3.02		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 64 ~ 74.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), \quad X = T_{XOn} / T_{XTotal}$$



## 8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency (MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	248.82
	190	836.60	243.72
	251	848.80	247.31
GSM850 EDGE	128	824.20	243.88
	190	836.60	244.38
	251	848.80	252.07
GSM1900	512	1850.20	244.72
	661	1880.00	243.54
	810	1909.80	246.30
GSM1900 EDGE	512	1850.20	250.66
	661	1880.00	249.86
	810	1909.80	245.55
WCDMA850	4132	826.40	4.1801
	4183	836.60	4.1598
	4233	846.60	4.1421
WCDMA1900	9262	1852.40	4.1809
	9400	1880.00	4.1870
	9538	1907.60	4.1754
WCDMA1700	1312	1712.40	4.1687
	1412	1732.40	4.1637
	1513	1752.60	4.1613

### Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 47 ~ 63.

## 8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	Limit (dBm)
GSM850	128	3.1307	27.976	-58.27	-30.291	-13.00
	190	3.6890	27.976	-57.69	-29.712	
	251	3.1207	27.976	-57.50	-29.528	
GSM1900	512	18.93000	29.489	-53.258	-23.769	
	661	17.91000	29.489	-52.990	-23.501	
	810	18.93000	29.489	-53.742	-24.253	
WCDMA850	4132	2.4727	27.976	-68.110	-40.134	
	4183	2.5125	27.976	-67.941	-39.965	
	4233	2.5424	27.976	-66.855	-38.879	
WCDMA1900	9262	18.8500	29.489	-63.497	-34.008	
	9400	16.4400	29.489	-63.178	-33.689	
	9538	16.6200	29.489	-63.598	-34.109	
WCDMA1700	1712.4	16.67000	29.489	-63.439	-33.950	
	1732.4	18.51000	29.489	-64.028	-34.539	
	1752.6	18.97000	29.489	-64.326	-34.837	

### Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 111 ~ 134.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


## 8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 75 ~ 110.

## 8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT:  $\pm 0.000\ 25\ \%$  or  $2.5\ \text{ppm}$

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	836 599 984	0.0	0.000 000	0.0000
100 %		-30	836 599 976	-8.4	-0.000 001	-0.0101
100 %		-20	836 599 974	-9.8	-0.000 001	-0.0117
100 %		-10	836 599 976	-8.5	-0.000 001	-0.0101
100 %		0	836 599 976	-7.9	-0.000 001	-0.0094
100 %		+10	836 599 978	-6.0	-0.000 001	-0.0072
100 %		+30	836 599 979	-5.4	-0.000 001	-0.0064
100 %		+40	836 599 980	-4.4	-0.000 001	-0.0053
100 %		+50	836 599 980	-4.3	-0.000 001	-0.0051
Batt. Endpoint	3.400	+20	836 599 980	-4.5	-0.000 001	-0.0054

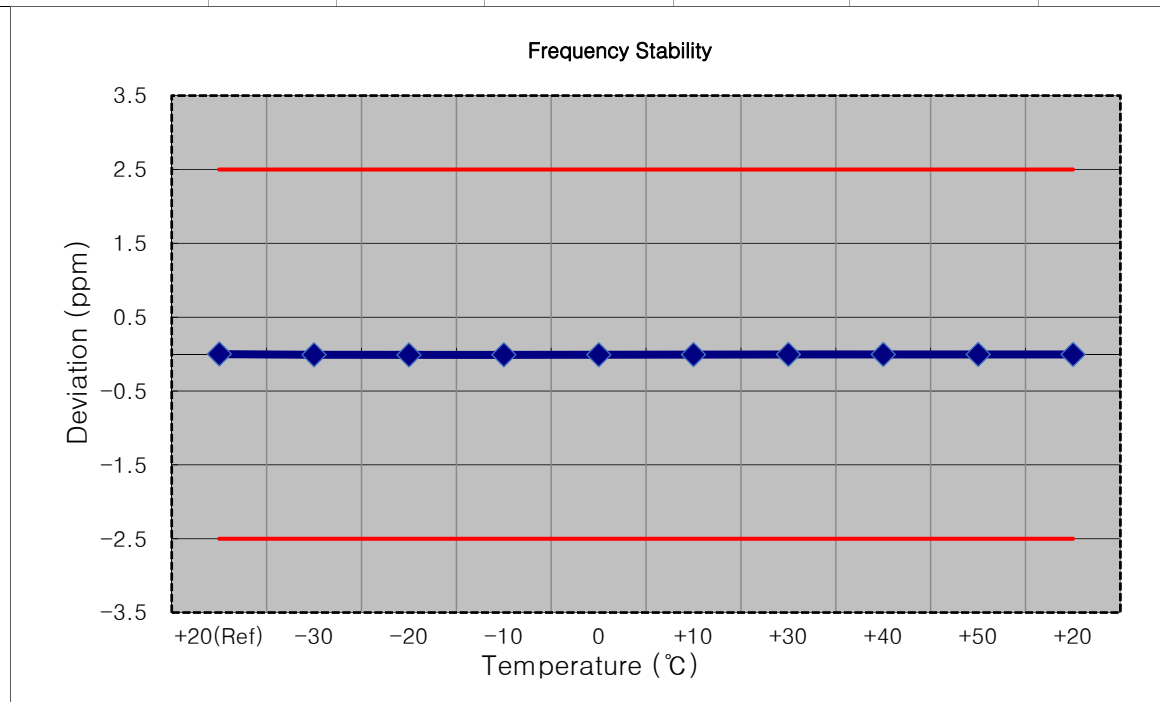


Mode: GSM1900  
 OPERATING FREQUENCY: 1850,200,000 Hz  
 CHANNEL: 512  
 REFERENCE VOLTAGE: 3.860 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1850 199 991	0.0	0.000 000	0.0000
100 %		-30	1850 199 981	-9.8	-0.000 001	-0.0053
100 %		-20	1850 199 982	-8.4	0.000 000	-0.0046
100 %		-10	1850 199 982	-8.4	0.000 000	-0.0045
100 %		0	1850 199 978	-12.4	-0.000 001	-0.0067
100 %		+10	1850 199 981	-9.3	-0.000 001	-0.0050
100 %		+30	1850 199 979	-11.2	-0.000 001	-0.0061
100 %		+40	1850 199 980	-10.9	-0.000 001	-0.0059
100 %		+50	1850 199 978	-12.0	-0.000 001	-0.0065
Batt. Endpoint	3.400	+20	1850 199 980	-10.2	-0.000 001	-0.0055

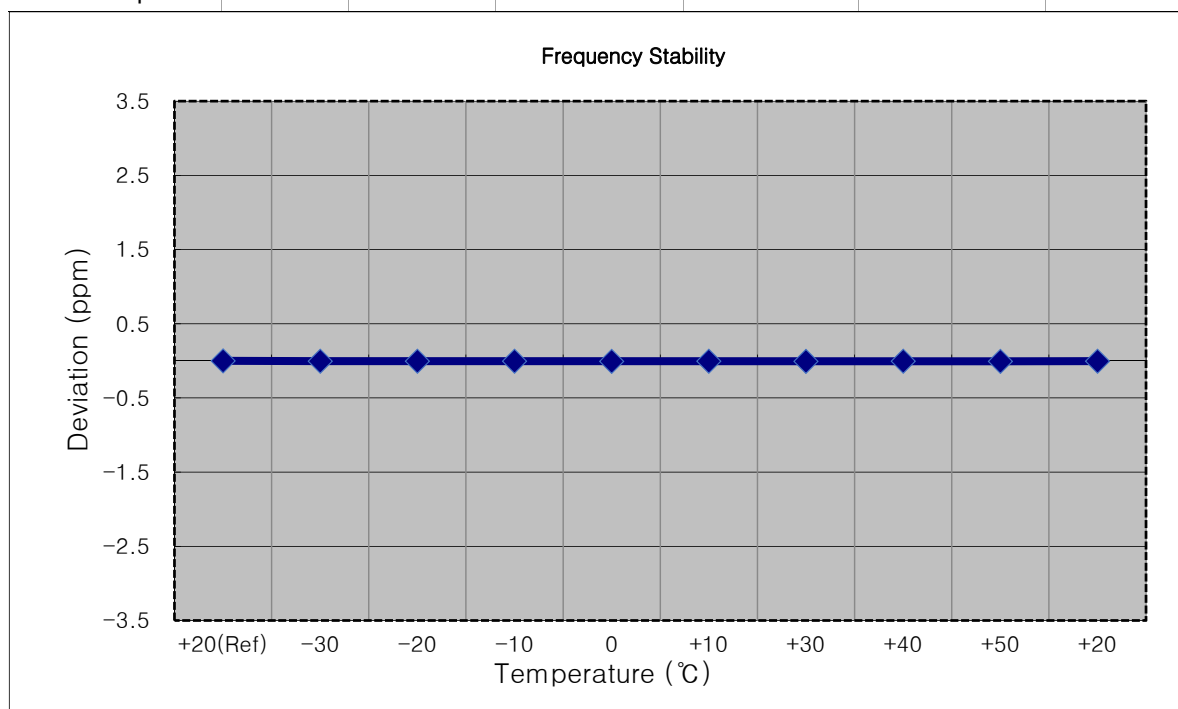


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1880 000 013	0.0	0.000 000	0.000
100 %		-30	1880 000 027	13.8	0.000 001	0.007
100 %		-20	1880 000 026	12.9	0.000 001	0.007
100 %		-10	1880 000 024	10.7	0.000 001	0.006
100 %		0	1880 000 025	11.7	0.000 001	0.006
100 %		+10	1880 000 027	14.2	0.000 001	0.008
100 %		+30	1880 000 029	15.7	0.000 001	0.008
100 %		+40	1880 000 028	14.5	0.000 001	0.008
100 %		+50	1880 000 032	18.7	0.000 001	0.010
Batt. Endpoint	3.400	+20	1880 000 028	15.3	0.000 001	0.008

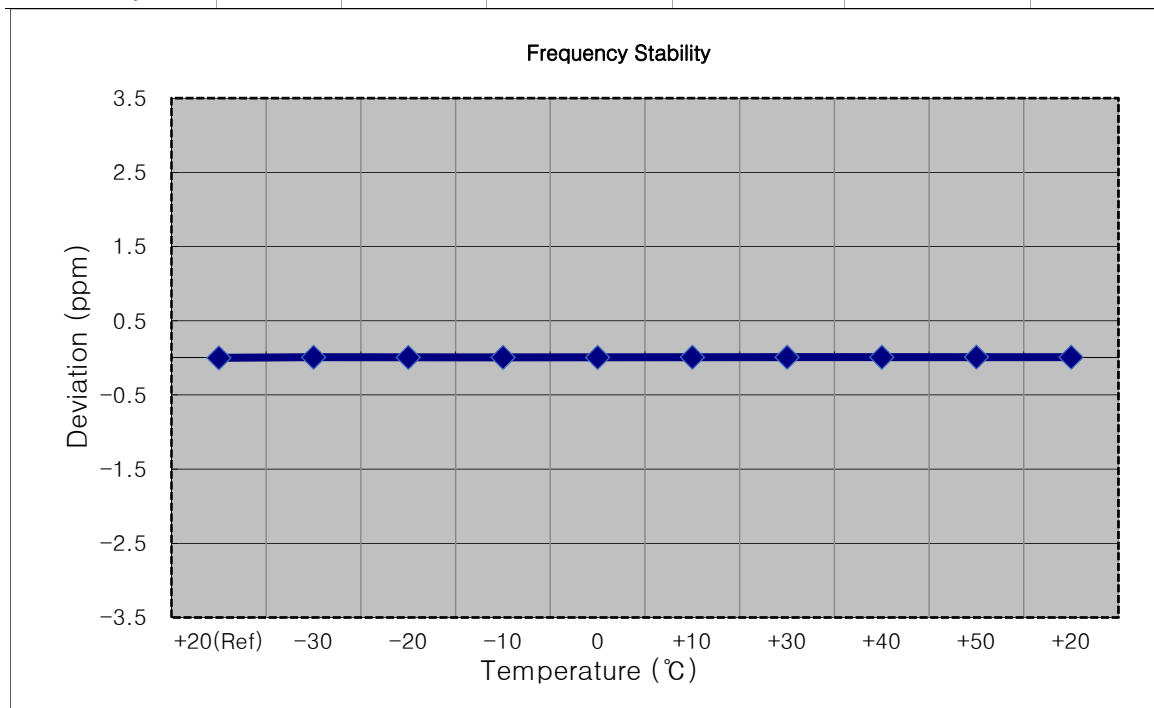


Mode:	<u>GSM1900</u>
OPERATING FREQUENCY:	<u>1909,800,000 Hz</u>
CHANNEL:	<u>810</u>
REFERENCE VOLTAGE:	<u>3.860 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1909 800 012	0.0	0.000 000	0.000
100 %		-30	1909 800 027	15.1	0.000 001	0.008
100 %		-20	1909 800 029	17.5	0.000 001	0.009
100 %		-10	1909 800 027	15.3	0.000 001	0.008
100 %		0	1909 800 030	18.4	0.000 001	0.010
100 %		+10	1909 800 030	18.1	0.000 001	0.009
100 %		+30	1909 800 025	13.8	0.000 001	0.007
100 %		+40	1909 800 023	11.7	0.000 001	0.006
100 %		+50	1909 800 022	10.9	0.000 001	0.006
Batt. Endpoint	3.400	+20	1909 800 017	5.7	0.000 000	0.003

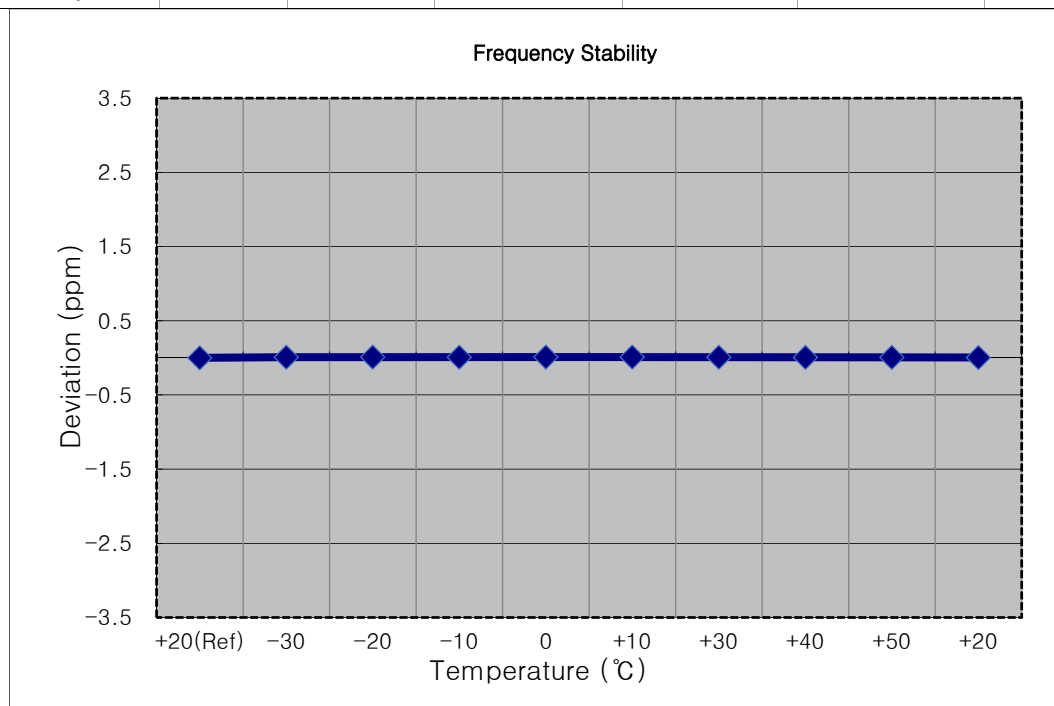


Mode:	WCDMA850
OPERATING FREQUENCY:	836,600,000 Hz
CHANNEL:	4183
REFERENCE VOLTAGE:	3.860 VDC
DEVIATION LIMIT:	$\pm 0.000\ 25\ \%$ or $2.5\ \text{ppm}$

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	836 599 995	0.0	0.000 000	0.0000
100 %		-30	836 599 989	-5.6	-0.000 001	-0.0067
100 %		-20	836 599 989	-5.5	-0.000 001	-0.0066
100 %		-10	836 599 990	-5.2	-0.000 001	-0.0063
100 %		0	836 599 990	-5.3	-0.000 001	-0.0063
100 %		+10	836 599 989	-5.8	-0.000 001	-0.0070
100 %		+30	836 599 990	-5.1	-0.000 001	-0.0061
100 %		+40	836 599 990	-4.7	-0.000 001	-0.0056
100 %		+50	836 599 990	-5.4	-0.000 001	-0.0064
Batt. Endpoint	3.400	+20	836 599 990	-5.0	-0.000 001	-0.0060

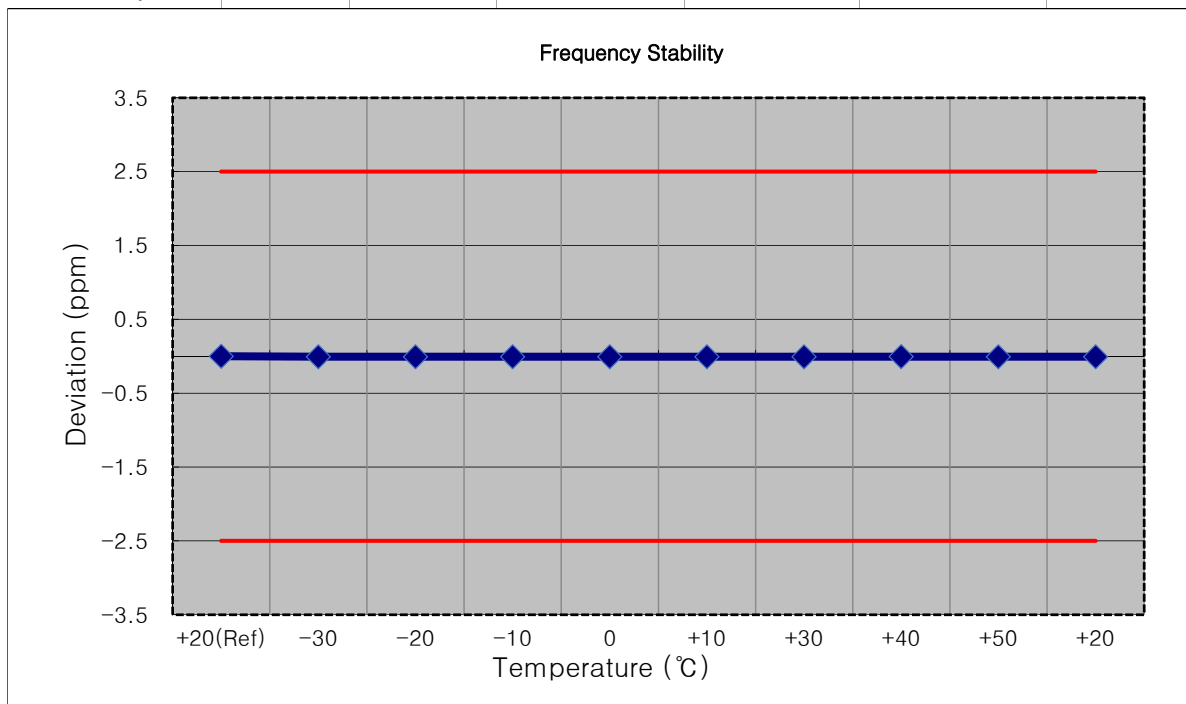

Mode: WCDMA1900  
 OPERATING FREQUENCY: 1,852,400,000 Hz  
 CHANNEL: 9262  
 REFERENCE VOLTAGE: 3.860 VDC  
 DEVIATION LIMIT: Emission must remain in band


Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1852 399 988	0.0	0.000 000	0.0000
100 %		-30	1852 399 978	-10.1	-0.000 001	-0.0055
100 %		-20	1852 399 977	-11.4	-0.000 001	-0.0062
100 %		-10	1852 399 977	-10.7	-0.000 001	-0.0058
100 %		0	1852 399 978	-10.2	-0.000 001	-0.0055
100 %		+10	1852 399 978	-9.9	-0.000 001	-0.0053
100 %		+30	1852 399 978	-9.7	-0.000 001	-0.0052
100 %		+40	1852 399 978	-10.1	-0.000 001	-0.0054
100 %		+50	1852 399 978	-10.2	-0.000 001	-0.0055
Batt. Endpoint	3.400	+20	1852 399 977	-10.7	-0.000 001	-0.0058

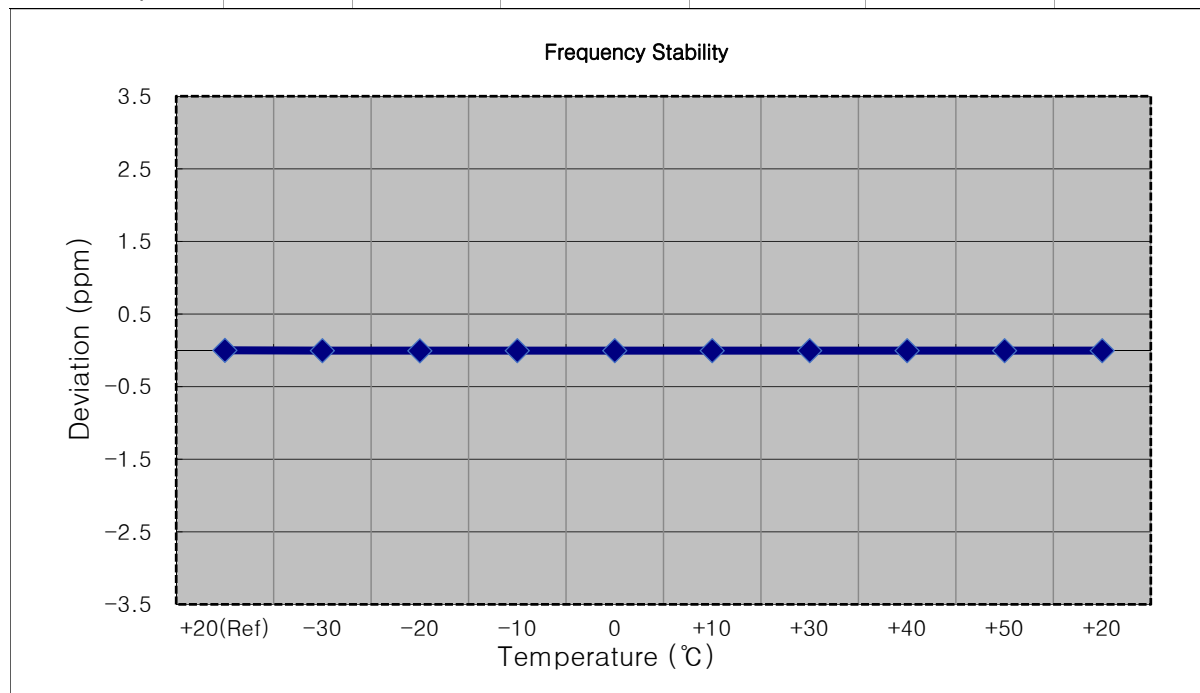




Mode: WCDMA1900  
 OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 9400  
 REFERENCE VOLTAGE: 3.860 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1879 999 997	0.0	0.000 000	0.0000
100 %		-30	1879 999 995	-2.1	0.000 000	-0.0011
100 %		-20	1879 999 995	-2.6	0.000 000	-0.0014
100 %		-10	1879 999 994	-3.3	0.000 000	-0.0018
100 %		0	1879 999 994	-2.9	0.000 000	-0.0016
100 %		+10	1880 000 000	2.2	0.000 000	0.0012
100 %		+30	1879 999 995	-2.2	0.000 000	-0.0012
100 %		+40	1879 999 994	-3.3	0.000 000	-0.0017
100 %		+50	1879 999 994	-3.0	0.000 000	-0.0016
Batt. Endpoint	3.400	+20	1879 999 993	-4.6	0.000 000	-0.0024

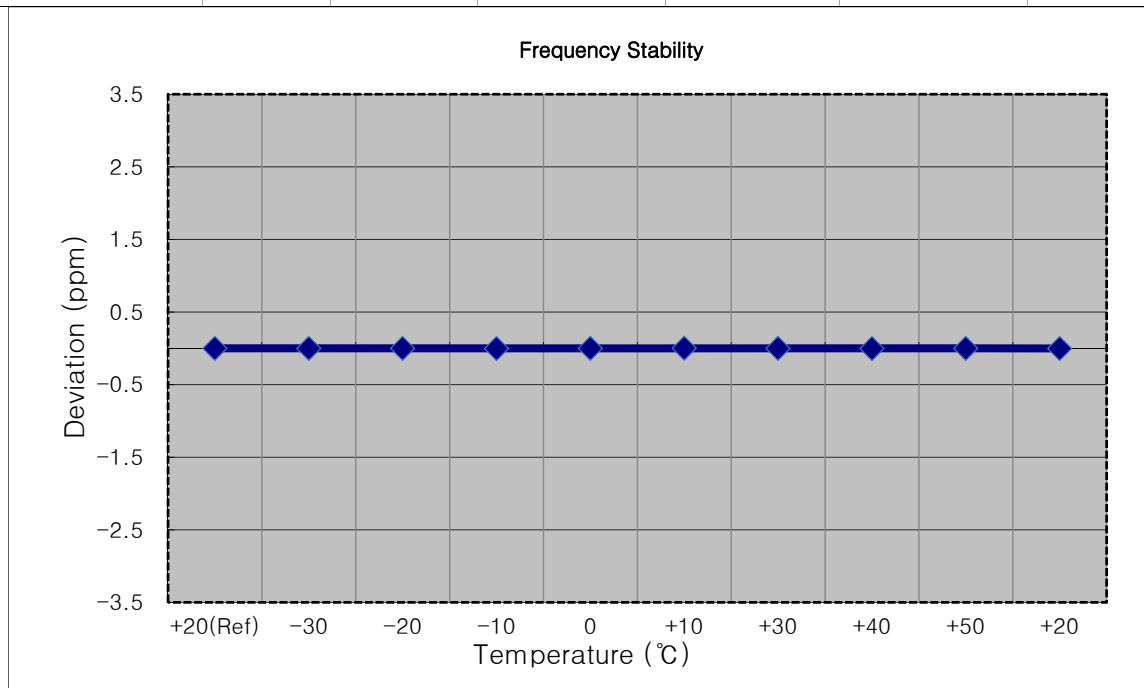


Mode: WCDMA1900  
 OPERATING FREQUENCY: 1,907,600,000 Hz  
 CHANNEL: 9538  
 REFERENCE VOLTAGE: 3.860 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1907 599 992	0.0	0.000 000	0.0000
100 %		-30	1907 599 985	-6.9	0.000 000	-0.0036
100 %		-20	1907 599 986	-6.1	0.000 000	-0.0032
100 %		-10	1907 599 986	-6.4	0.000 000	-0.0033
100 %		0	1907 599 985	-7.0	0.000 000	-0.0037
100 %		+10	1907 599 985	-7.6	0.000 000	-0.0040
100 %		+30	1907 599 985	-6.8	0.000 000	-0.0036
100 %		+40	1907 599 986	-6.4	0.000 000	-0.0034
100 %		+50	1907 599 986	-6.3	0.000 000	-0.0033
Batt. Endpoint	3.400	+20	1907 599 986	-5.9	0.000 000	-0.0031

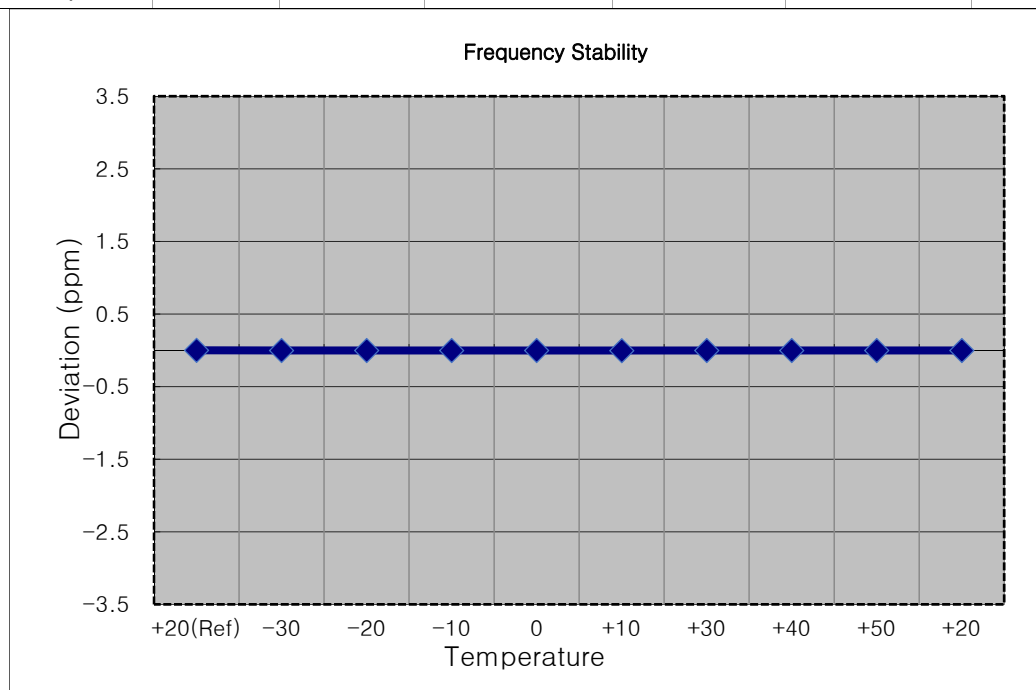


Mode:	WCDMA1700
OPERATING FREQUENCY:	1,712,400,000 Hz
CHANNEL:	1312
REFERENCE VOLTAGE:	3.860 VDC
DEVIATION LIMIT:	Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1712 400 002	0.0	0.000 000	0.0000
100 %		-30	1712 400 006	3.5	0.000 000	0.0020
100 %		-20	1712 400 007	5.2	0.000 000	0.0030
100 %		-10	1712 400 006	3.7	0.000 000	0.0022
100 %		0	1712 400 006	4.0	0.000 000	0.0023
100 %		+10	1712 400 007	5.0	0.000 000	0.0029
100 %		+30	1712 400 007	4.6	0.000 000	0.0027
100 %		+40	1712 400 006	3.2	0.000 000	0.0019
100 %		+50	1712 400 006	3.3	0.000 000	0.0019
Batt. Endpoint	3.400	+20	1712 400 007	4.8	0.000 000	0.0028

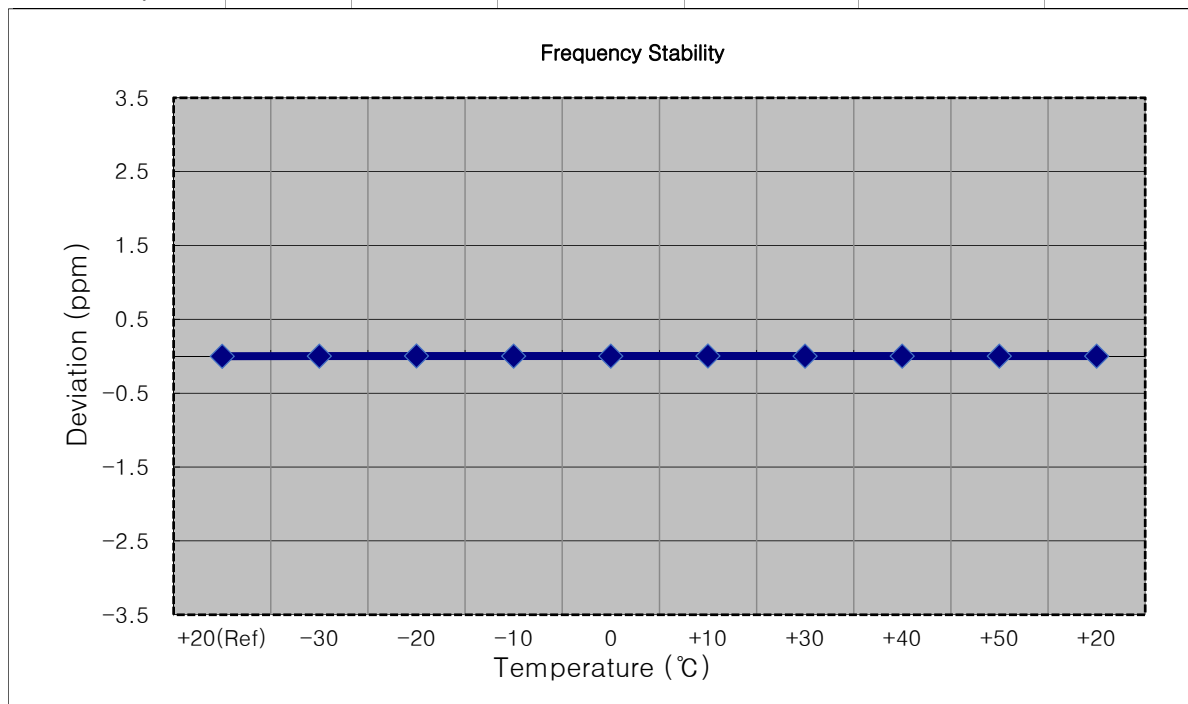


Mode: WCDMA1700  
 OPERATING FREQUENCY: 1,732,400,000 Hz  
 CHANNEL: 1412  
 REFERENCE VOLTAGE: 3.860 VDC  
 DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1732 399 989	0.0	0.000 000	0.0000
100 %		-30	1732 399 978	-10.7	-0.000 001	-0.0062
100 %		-20	1732 399 977	-12.3	-0.000 001	-0.0071
100 %		-10	1732 399 979	-10.2	-0.000 001	-0.0059
100 %		0	1732 399 977	-11.4	-0.000 001	-0.0066
100 %		+10	1732 399 978	-11.3	-0.000 001	-0.0065
100 %		+30	1732 399 977	-12.0	-0.000 001	-0.0069
100 %		+40	1732 399 978	-10.8	-0.000 001	-0.0063
100 %		+50	1732 399 977	-12.2	-0.000 001	-0.0070
Batt. Endpoint	3.400	+20	1732 399 975	-13.4	-0.000 001	-0.0077

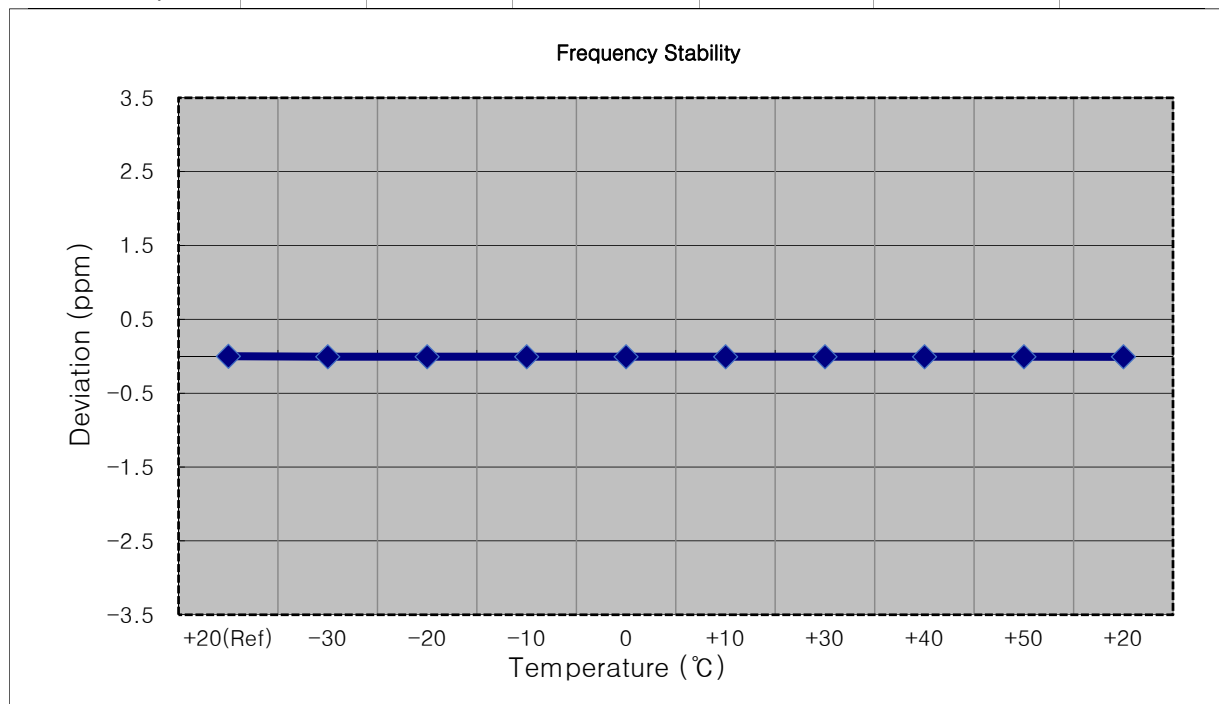


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage	Power	Temp.	Frequency	Frequency	Deviation	ppm
(%)	(VDC)	(°C)	(Hz)	Error (Hz)	(%)	
100 %	3.860	+20(Ref)	1752 599 986	0.0	0.000 000	0.0000
100 %		-30	1752 599 976	-10.6	-0.000 001	-0.0061
100 %		-20	1752 599 976	-10.6	-0.000 001	-0.0060
100 %		-10	1752 599 975	-11.0	-0.000 001	-0.0063
100 %		0	1752 599 975	-11.7	-0.000 001	-0.0067
100 %		+10	1752 599 976	-10.5	-0.000 001	-0.0060
100 %		+30	1752 599 975	-11.4	-0.000 001	-0.0065
100 %		+40	1752 599 975	-11.8	-0.000 001	-0.0067
100 %		+50	1752 599 976	-10.0	-0.000 001	-0.0057
Batt. Endpoint	3.400	+20	1752 599 975	-11.4	-0.000 001	-0.0065

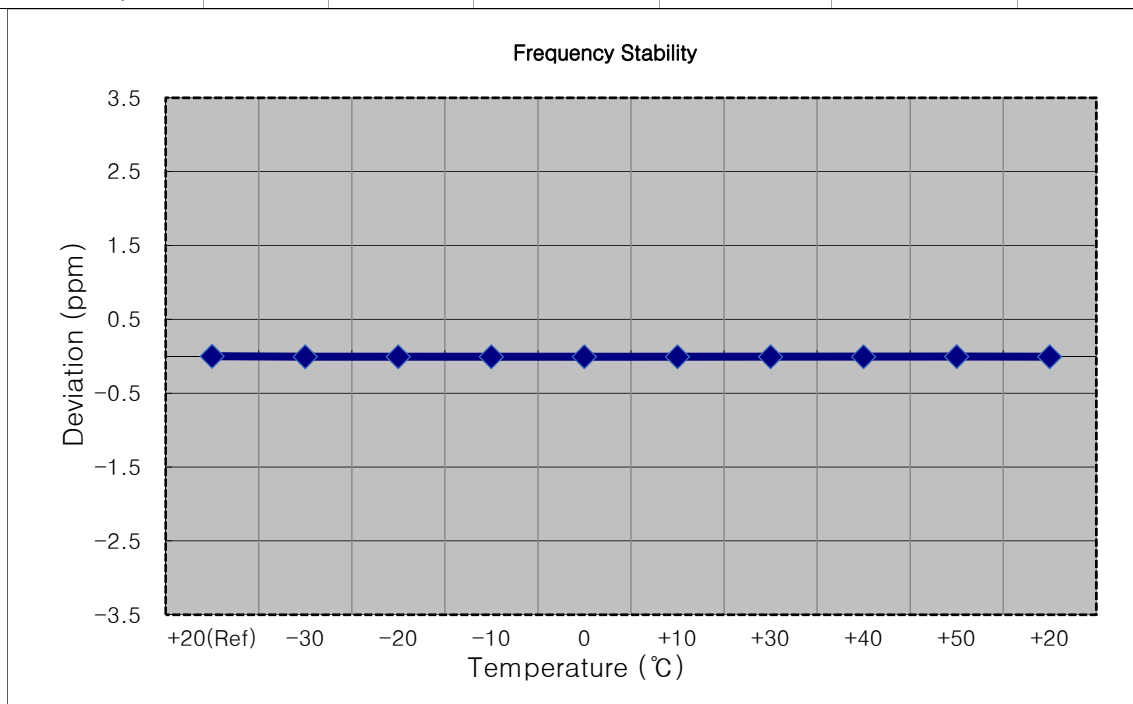


## 9. TEST PLOTS

■ GSM850 MODE (128 CH.) Occupied Bandwidth

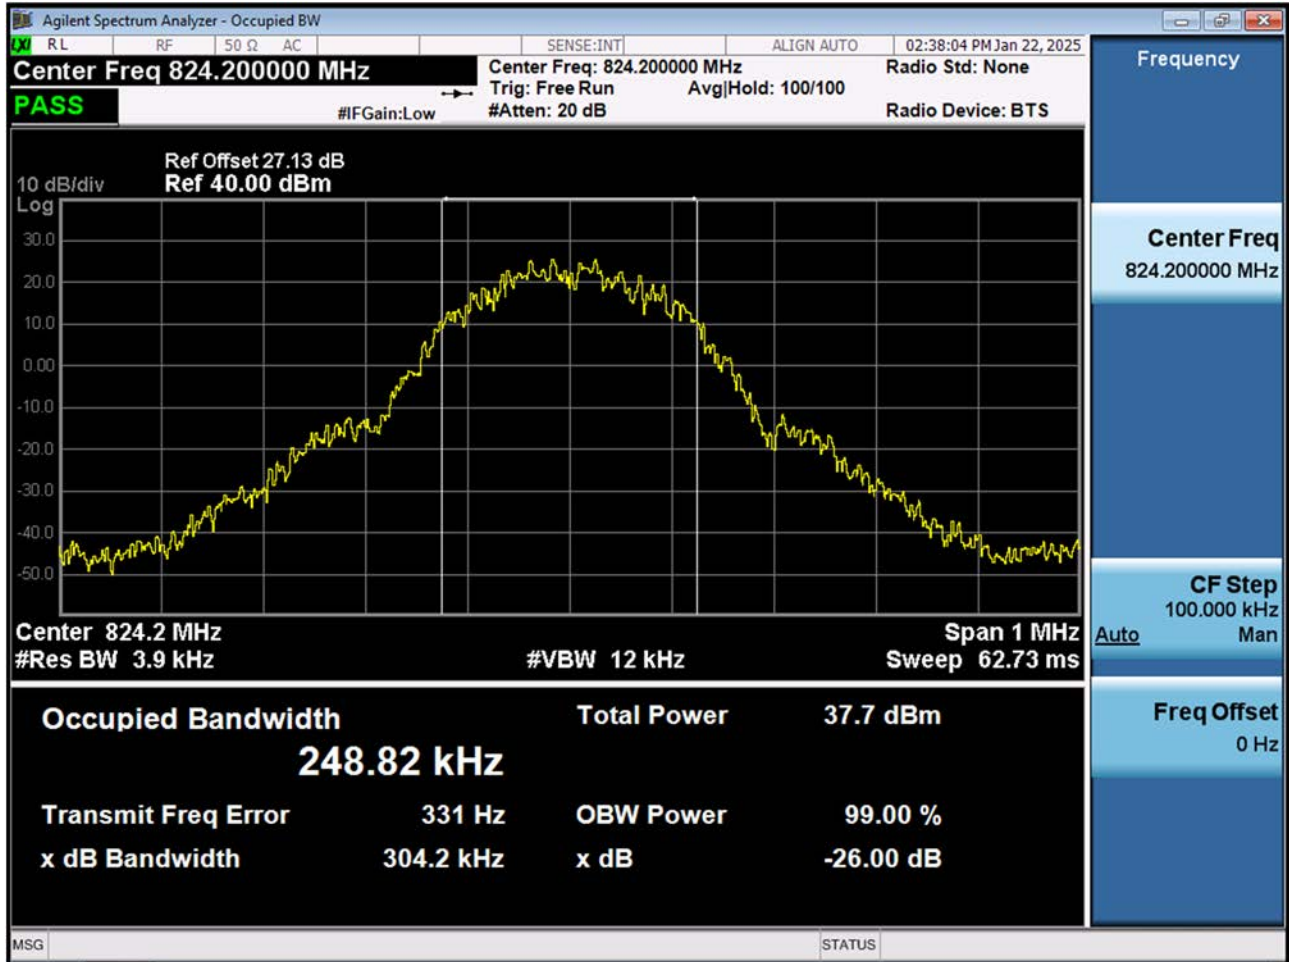


■ GSM850 MODE (190 CH.) Occupied Bandwidth

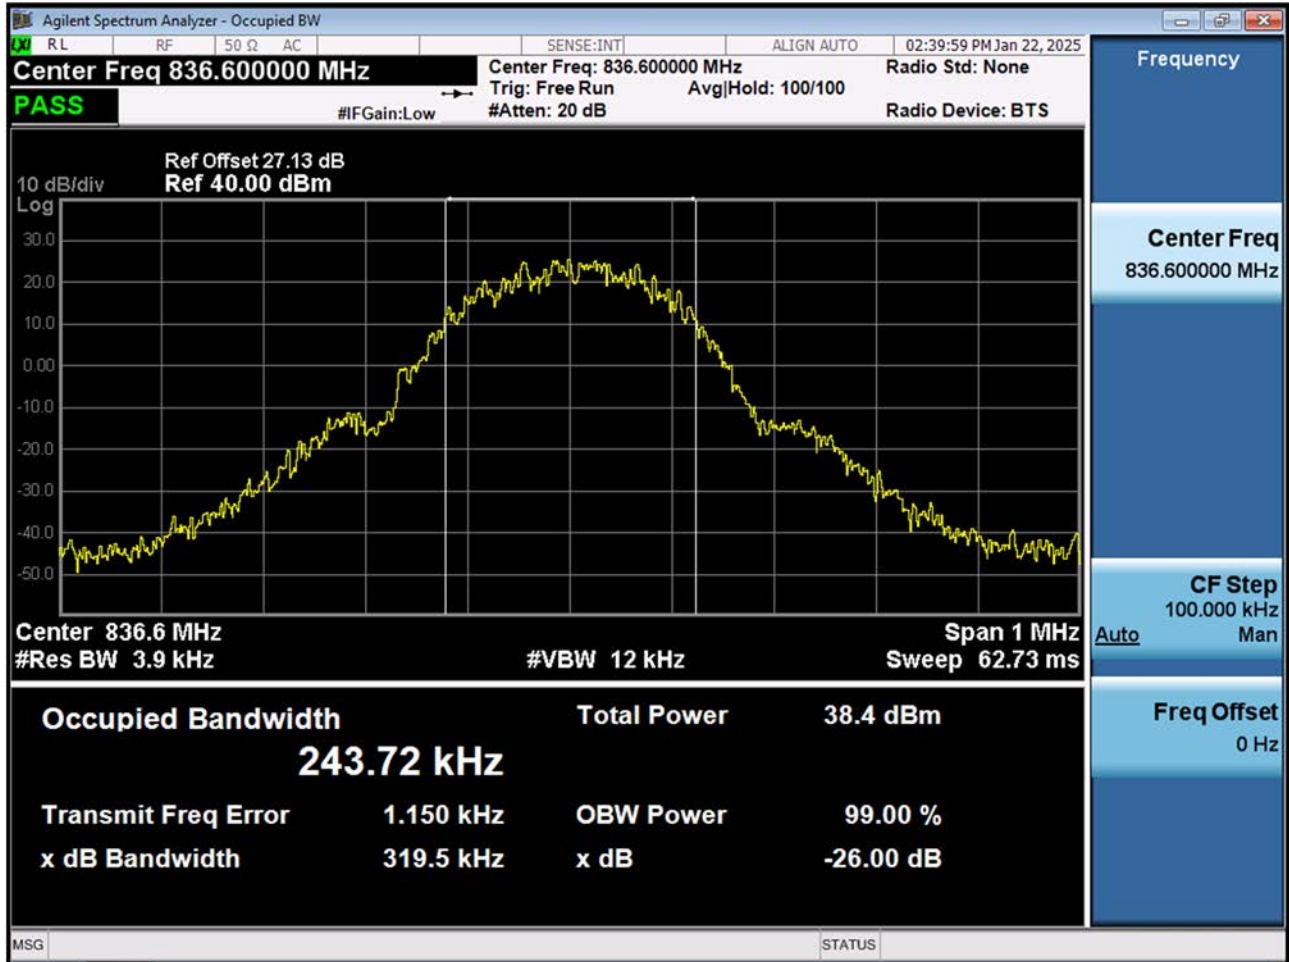





■ GSM850 MODE (251 CH.) Occupied Bandwidth

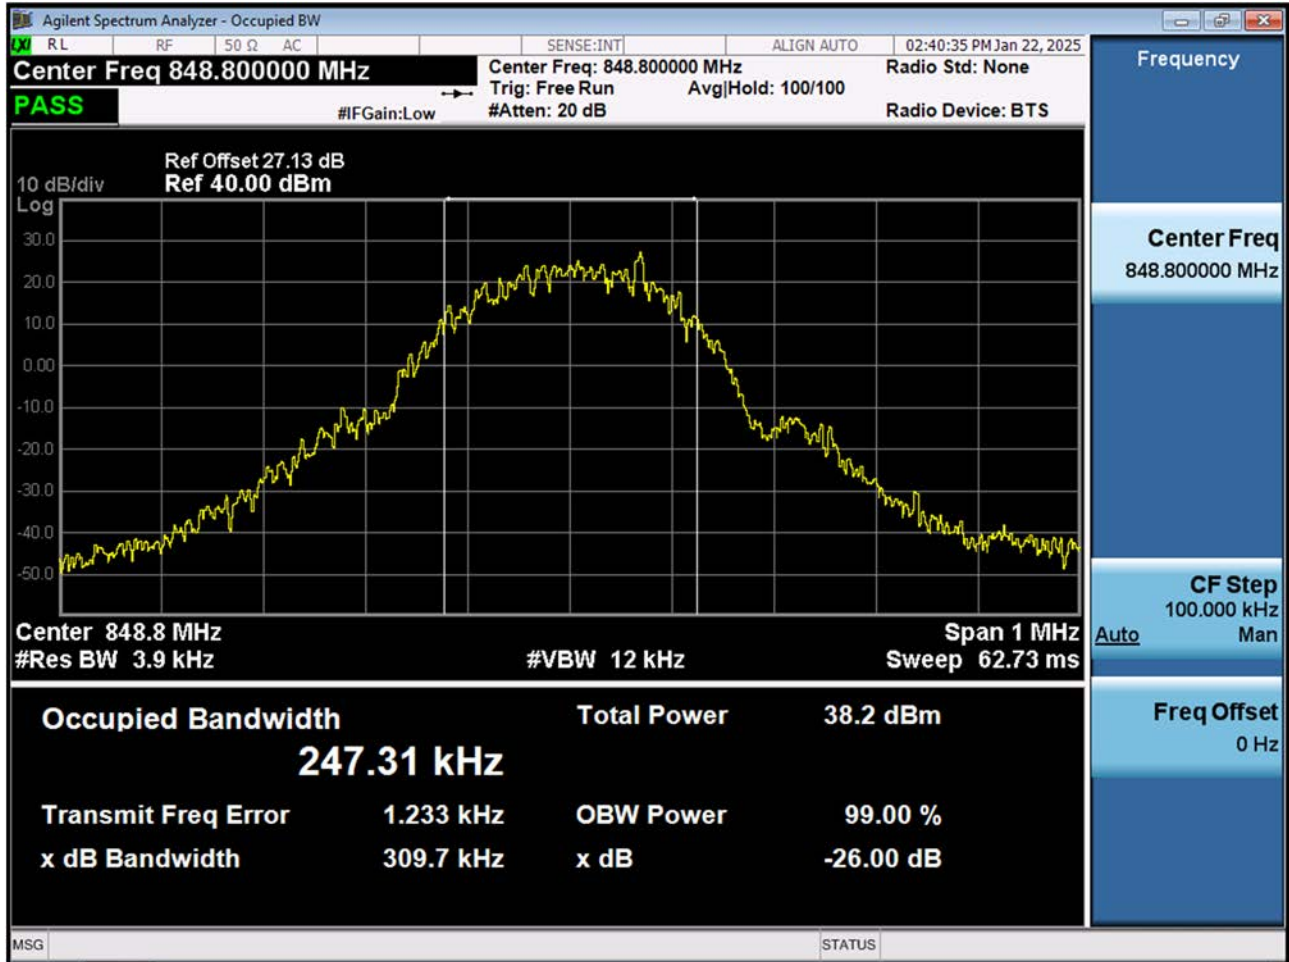


■ GSM850 EDGE (251 CH.) Occupied Bandwidth

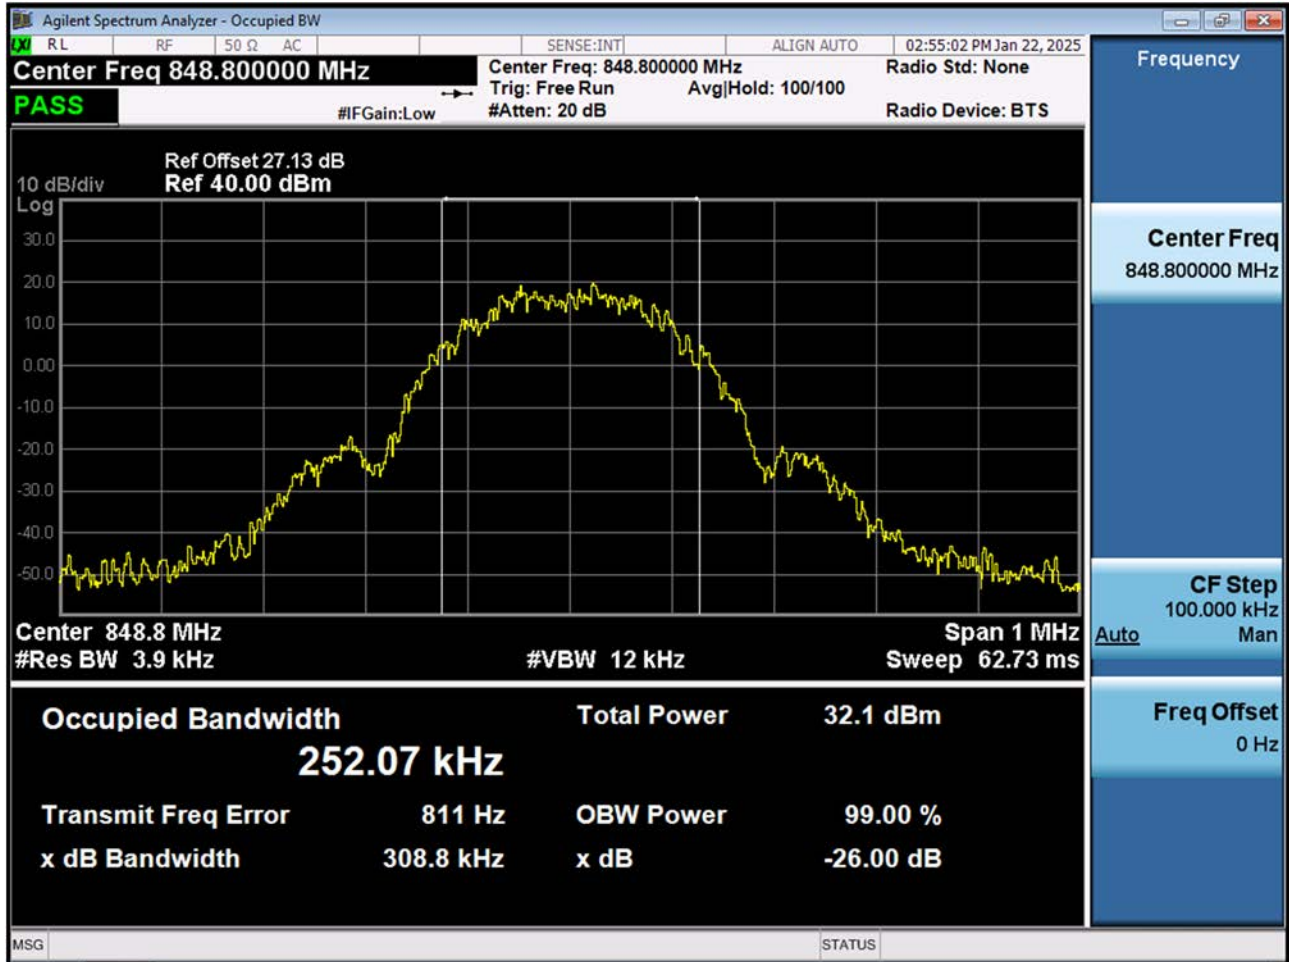


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

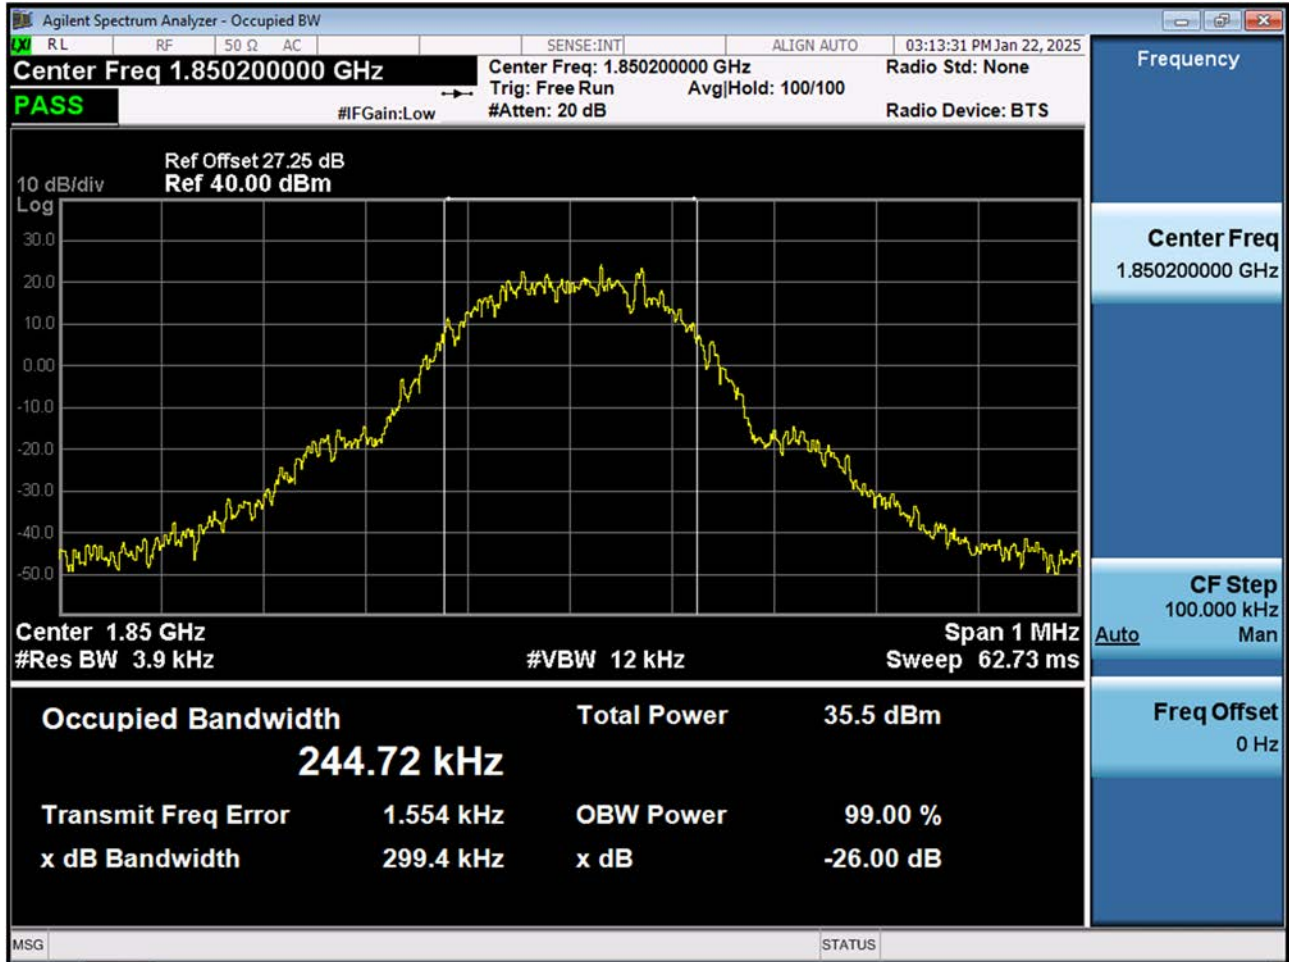


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

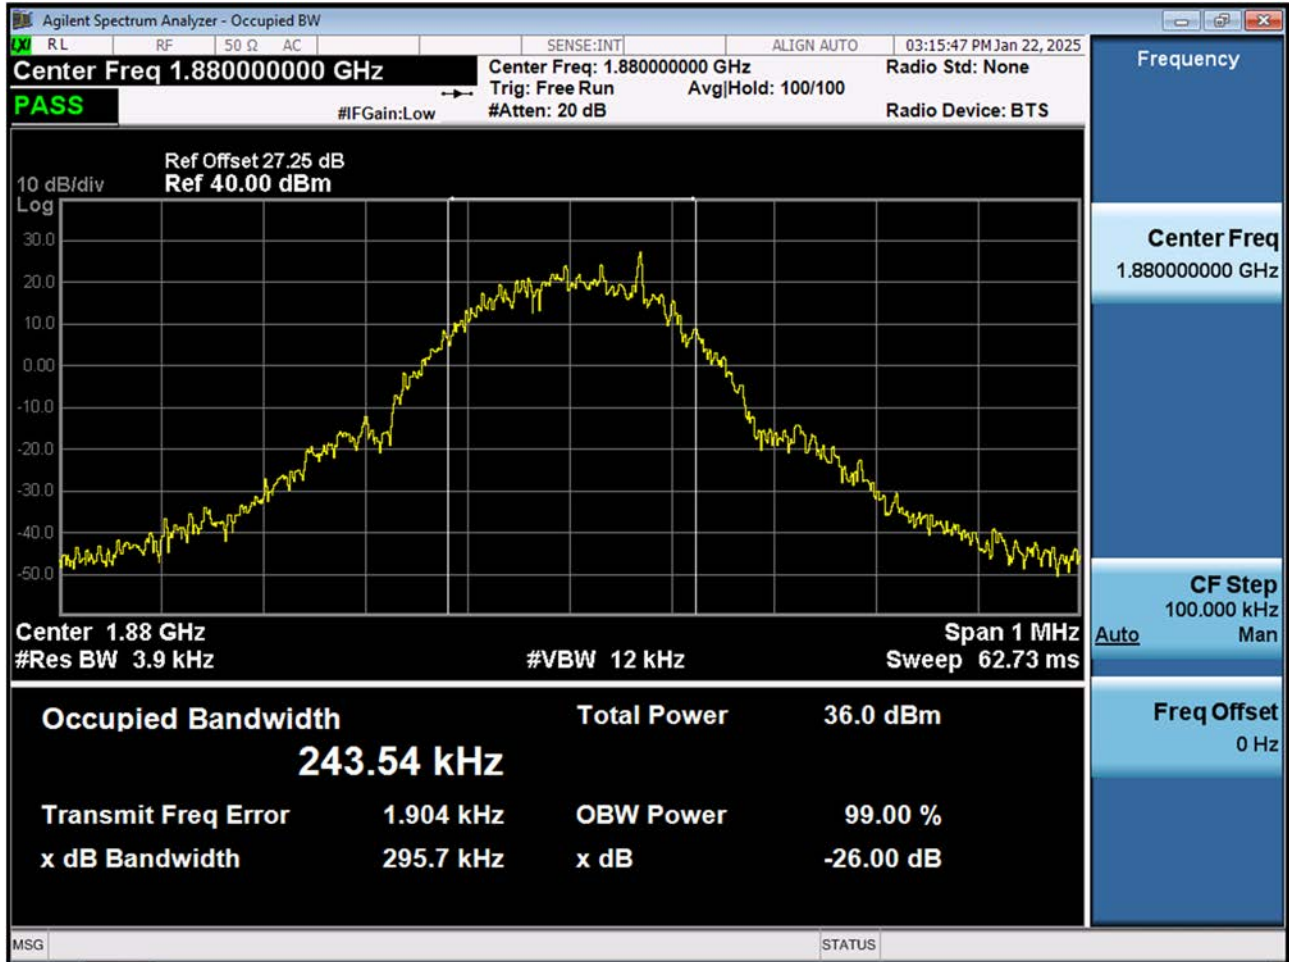

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

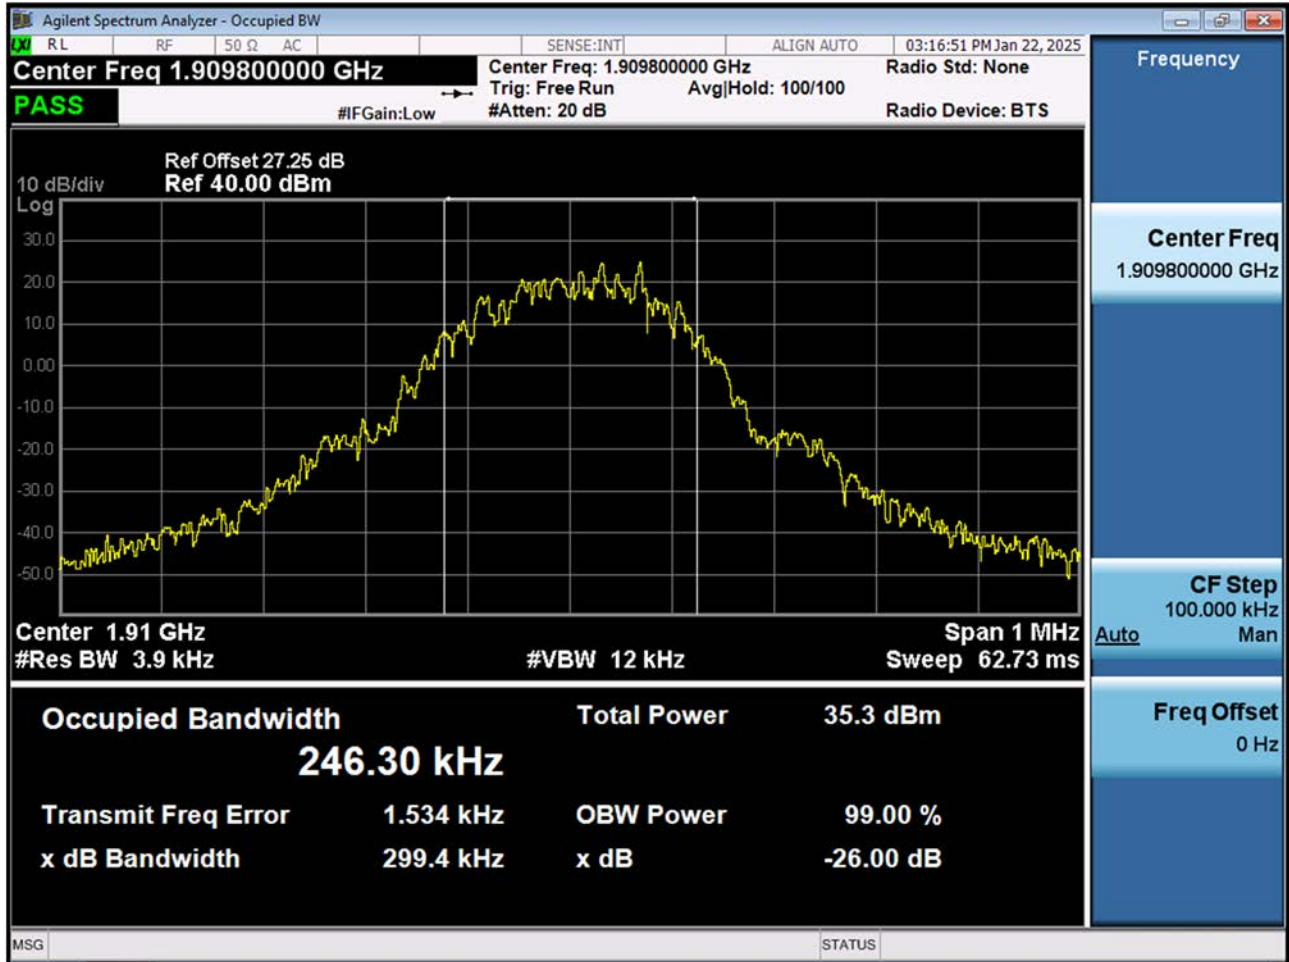


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

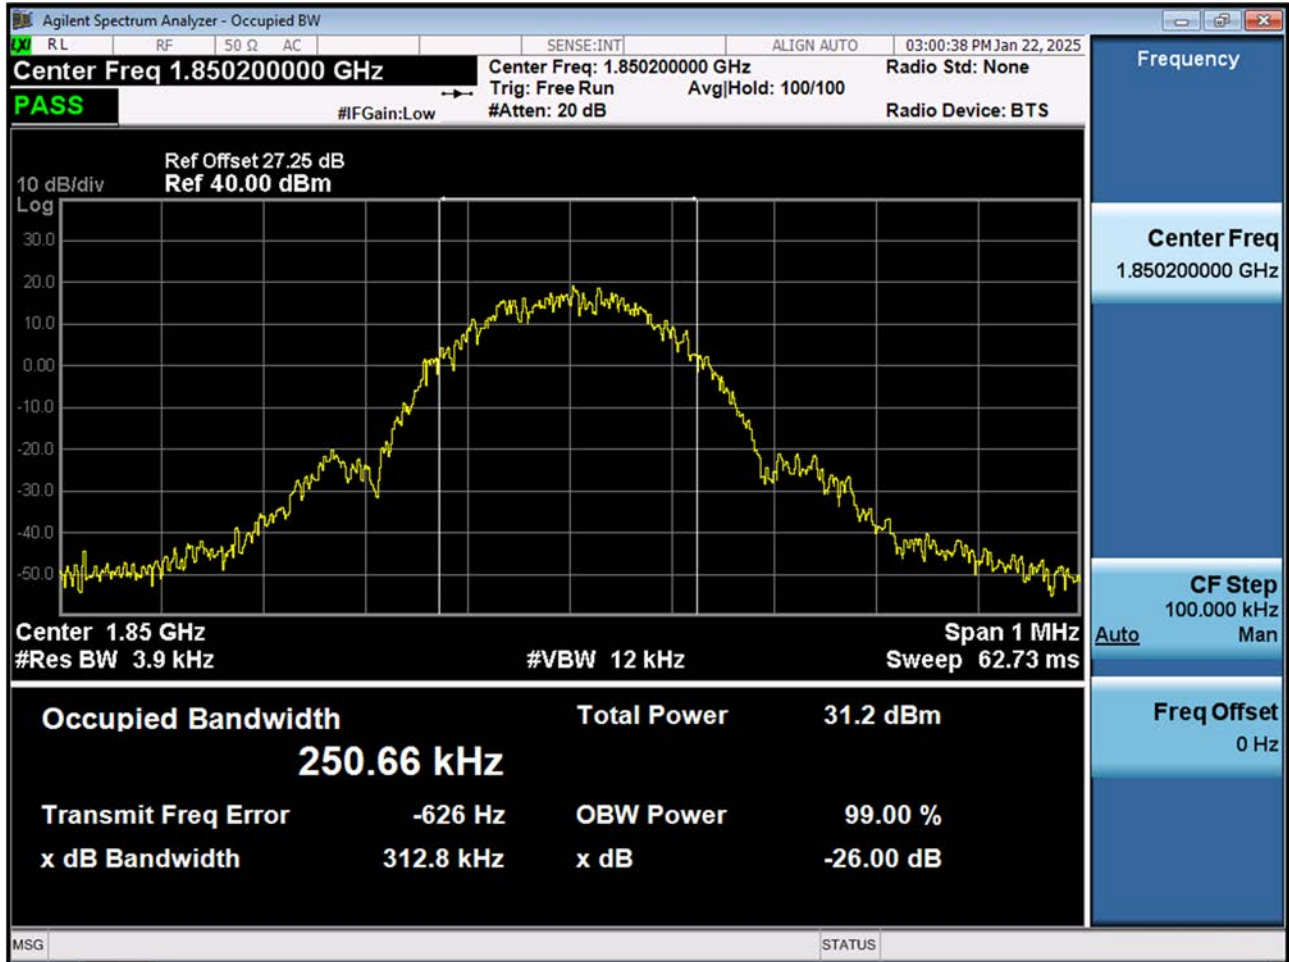




■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

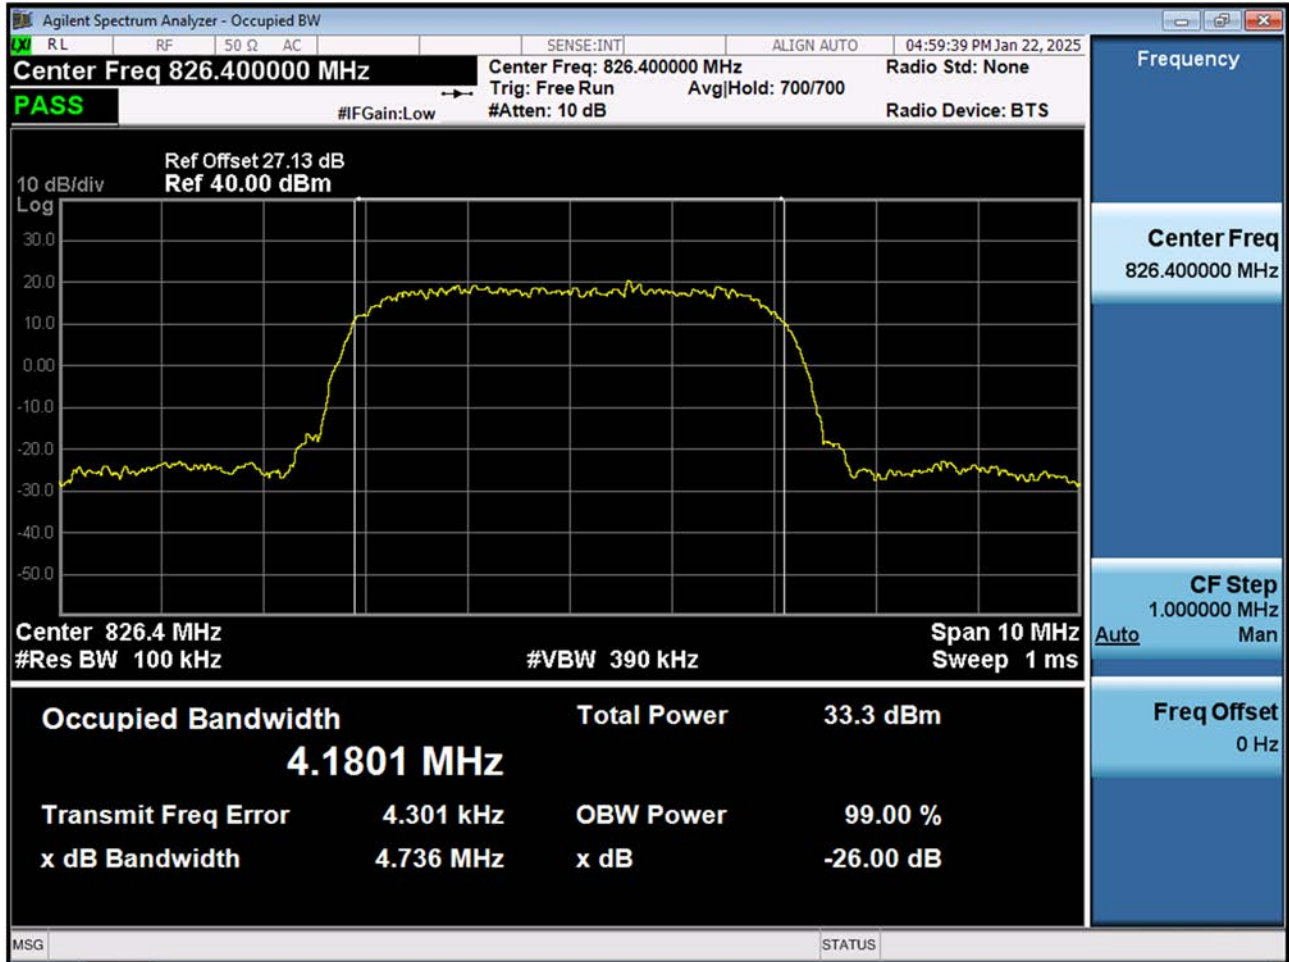


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

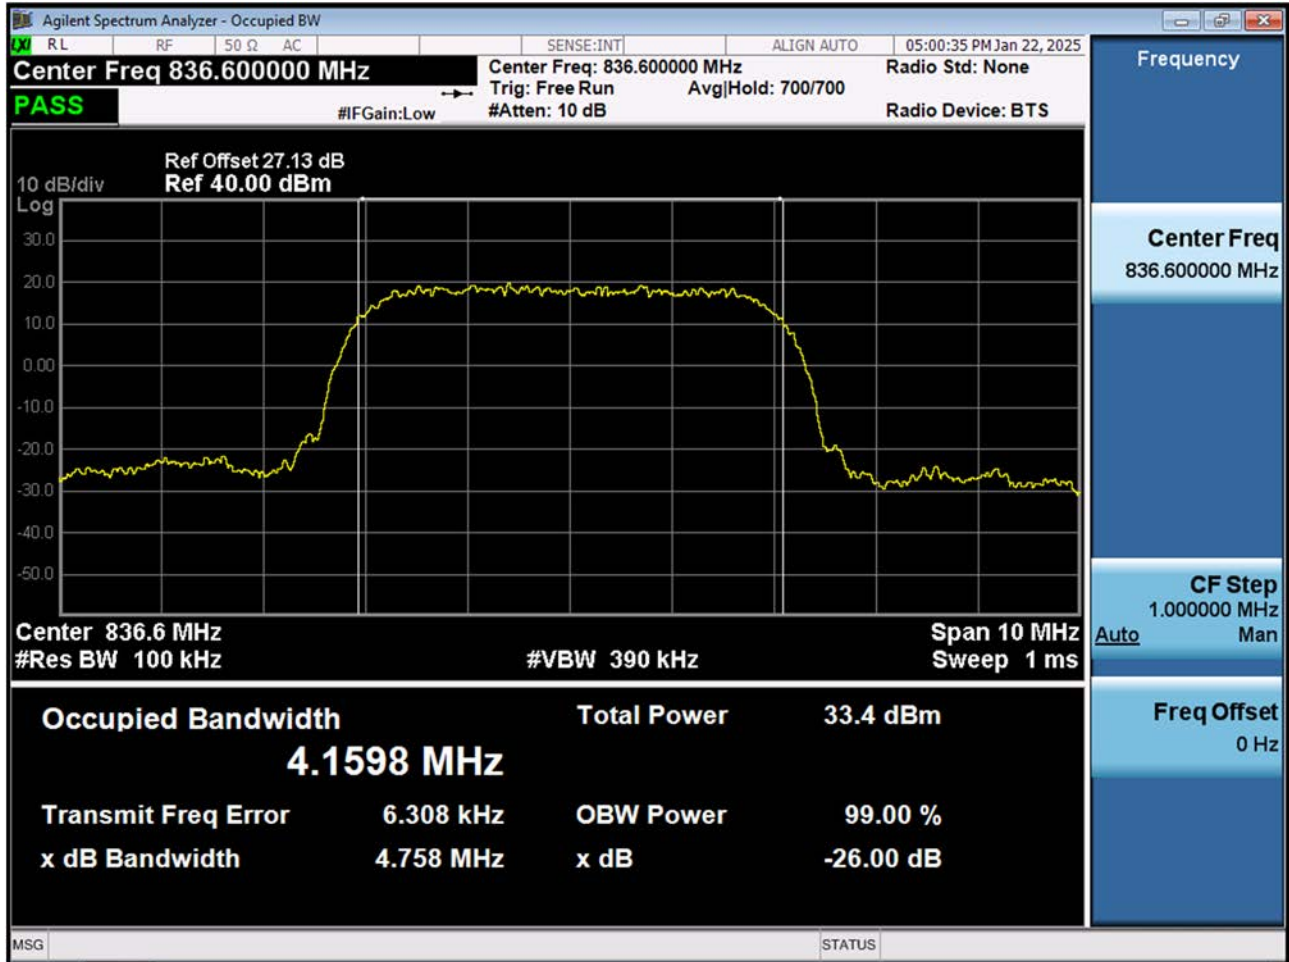





■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

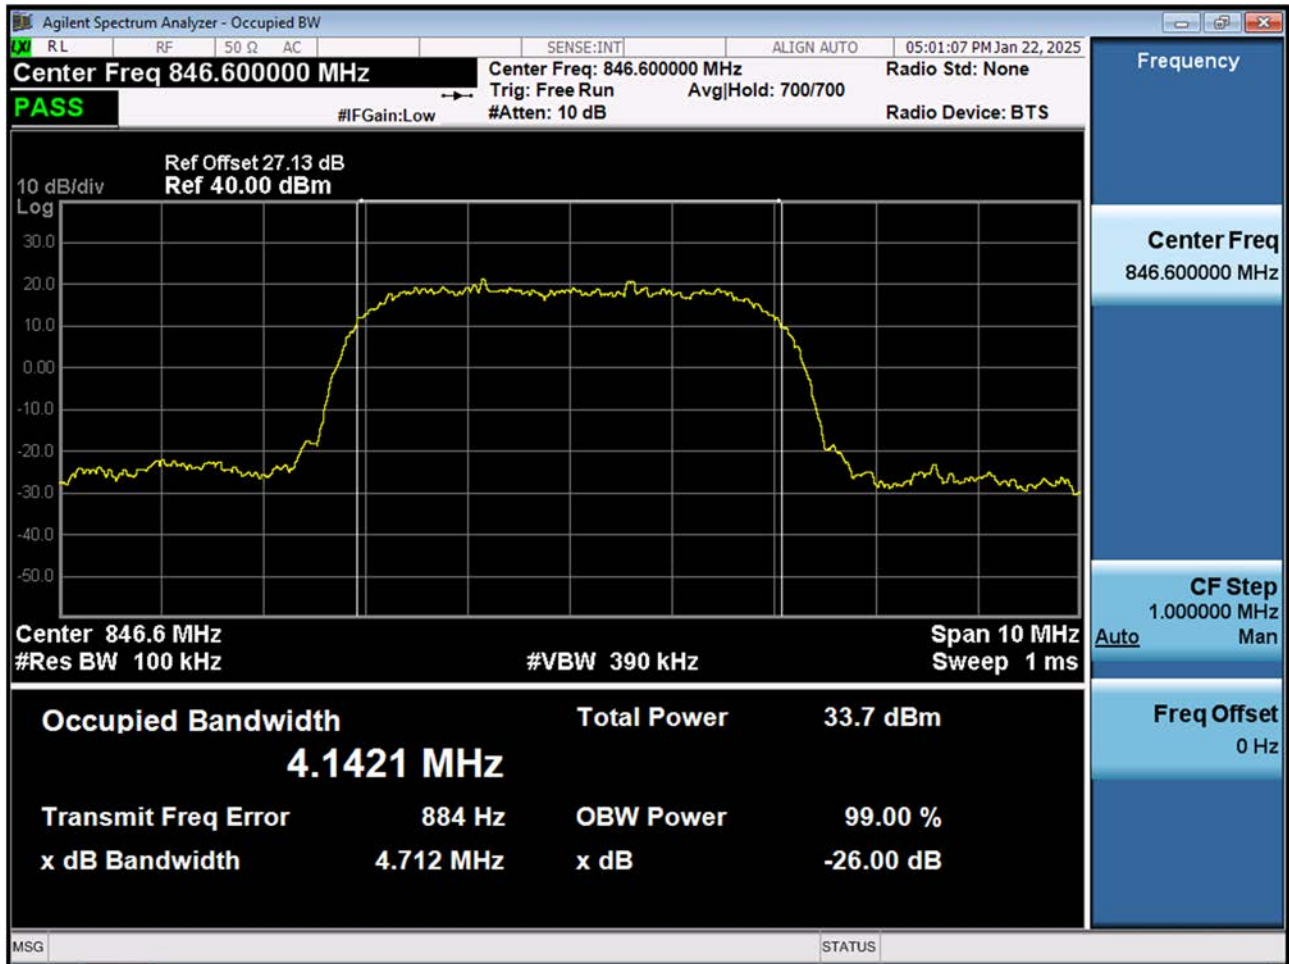


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

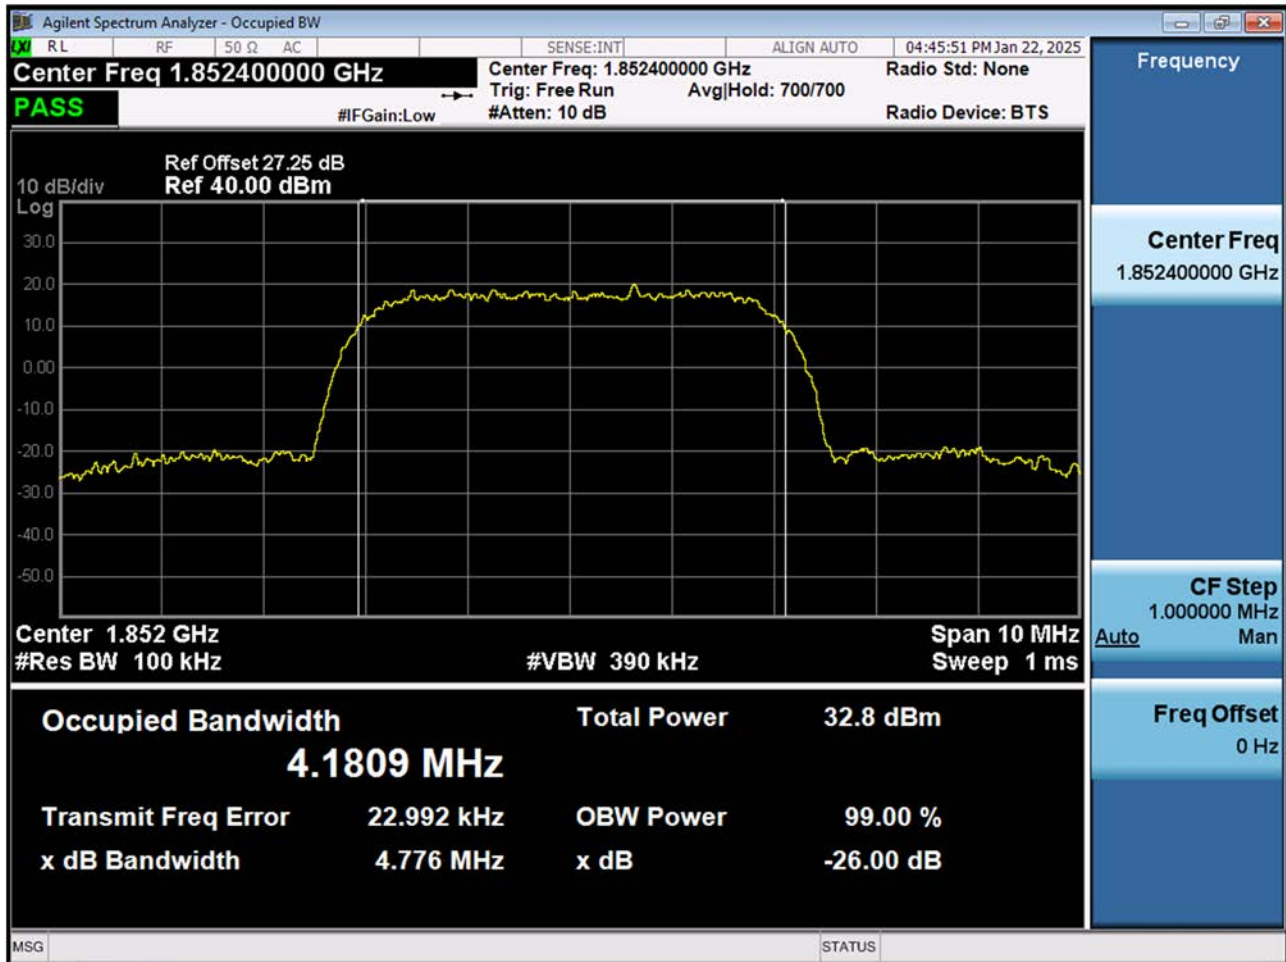


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

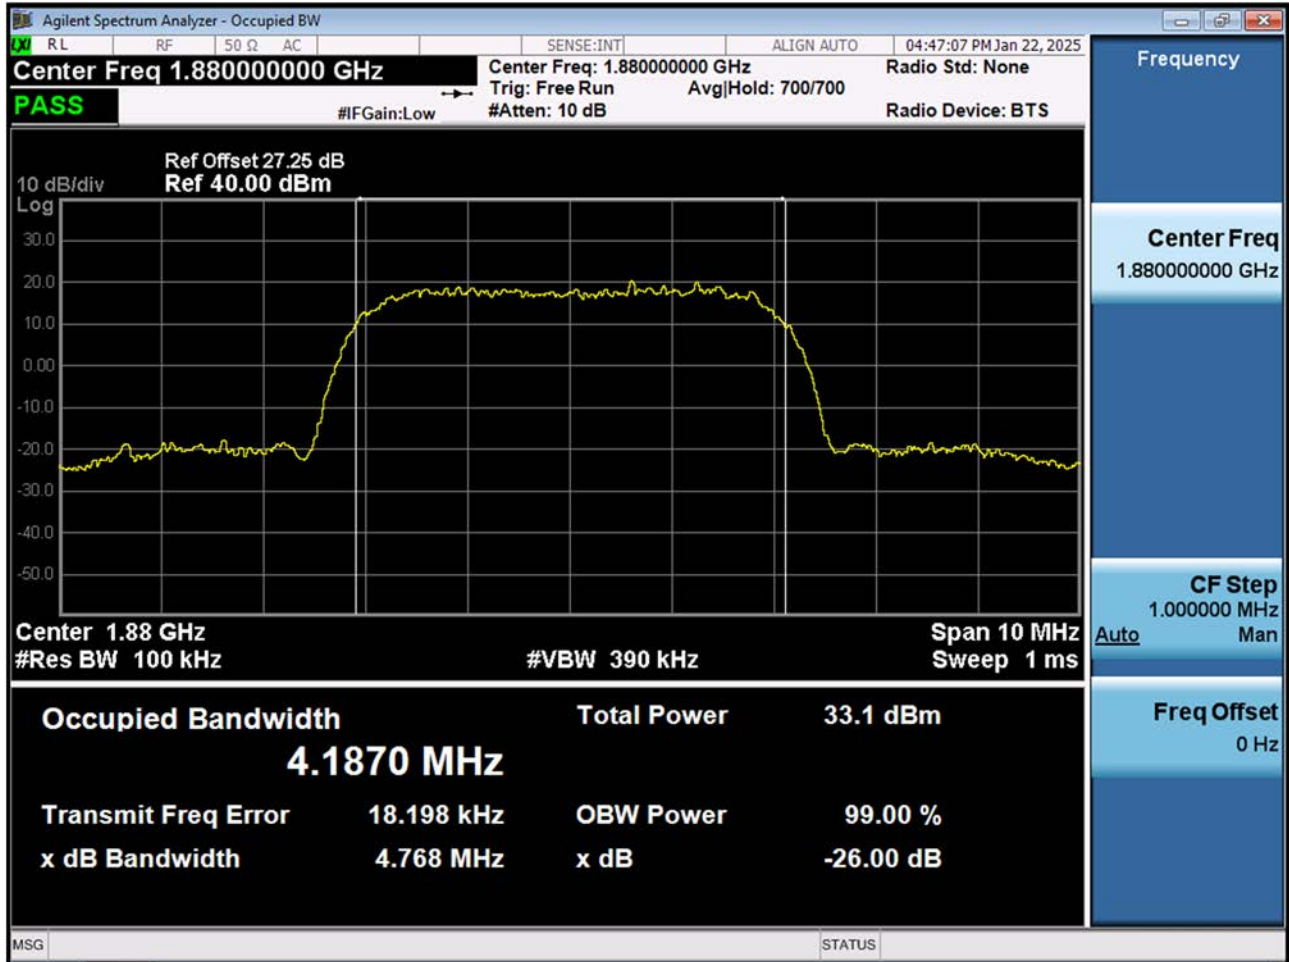


## ■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

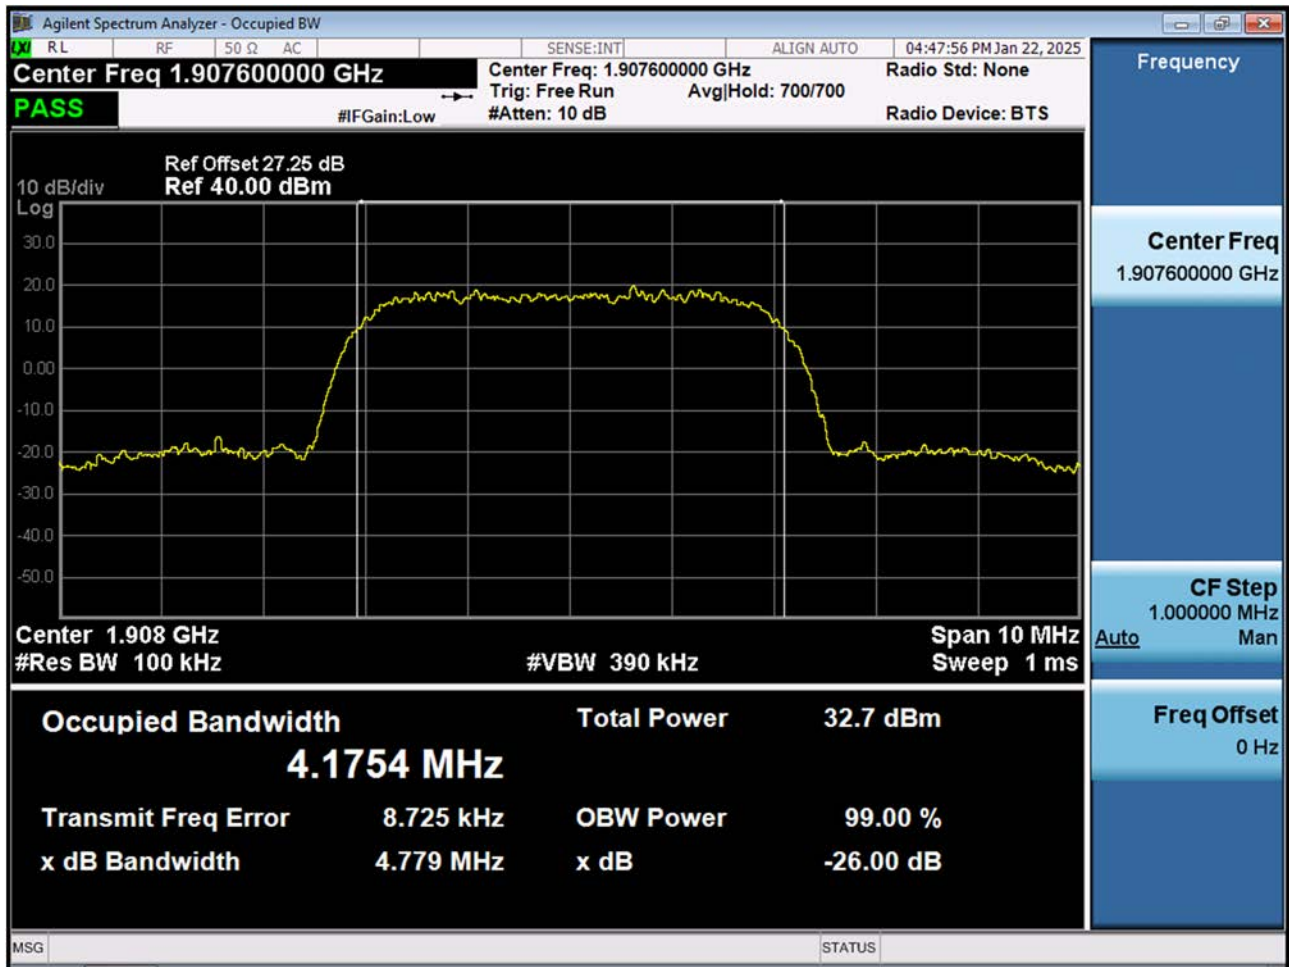

■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

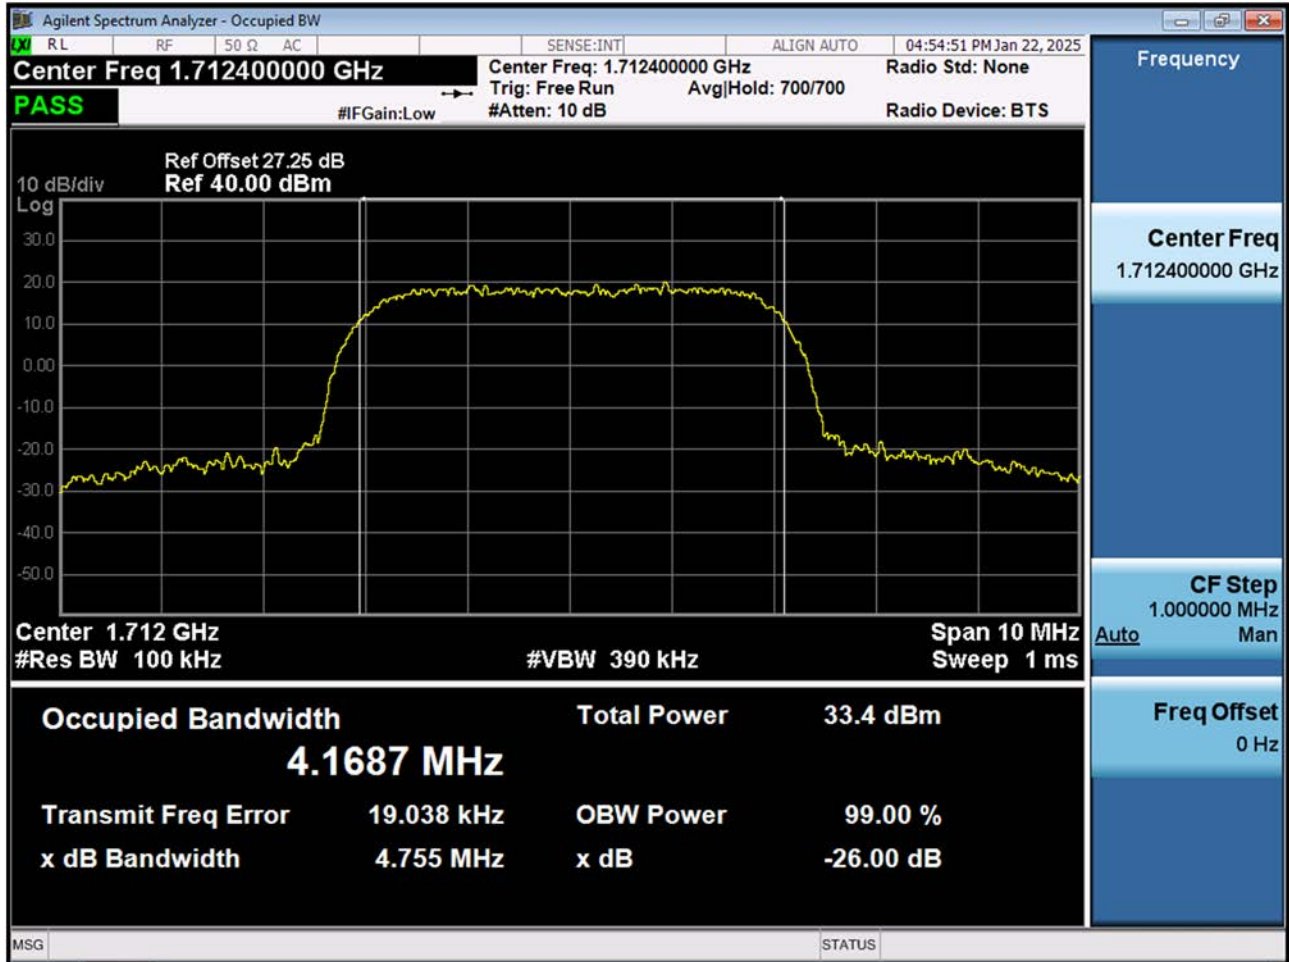


■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

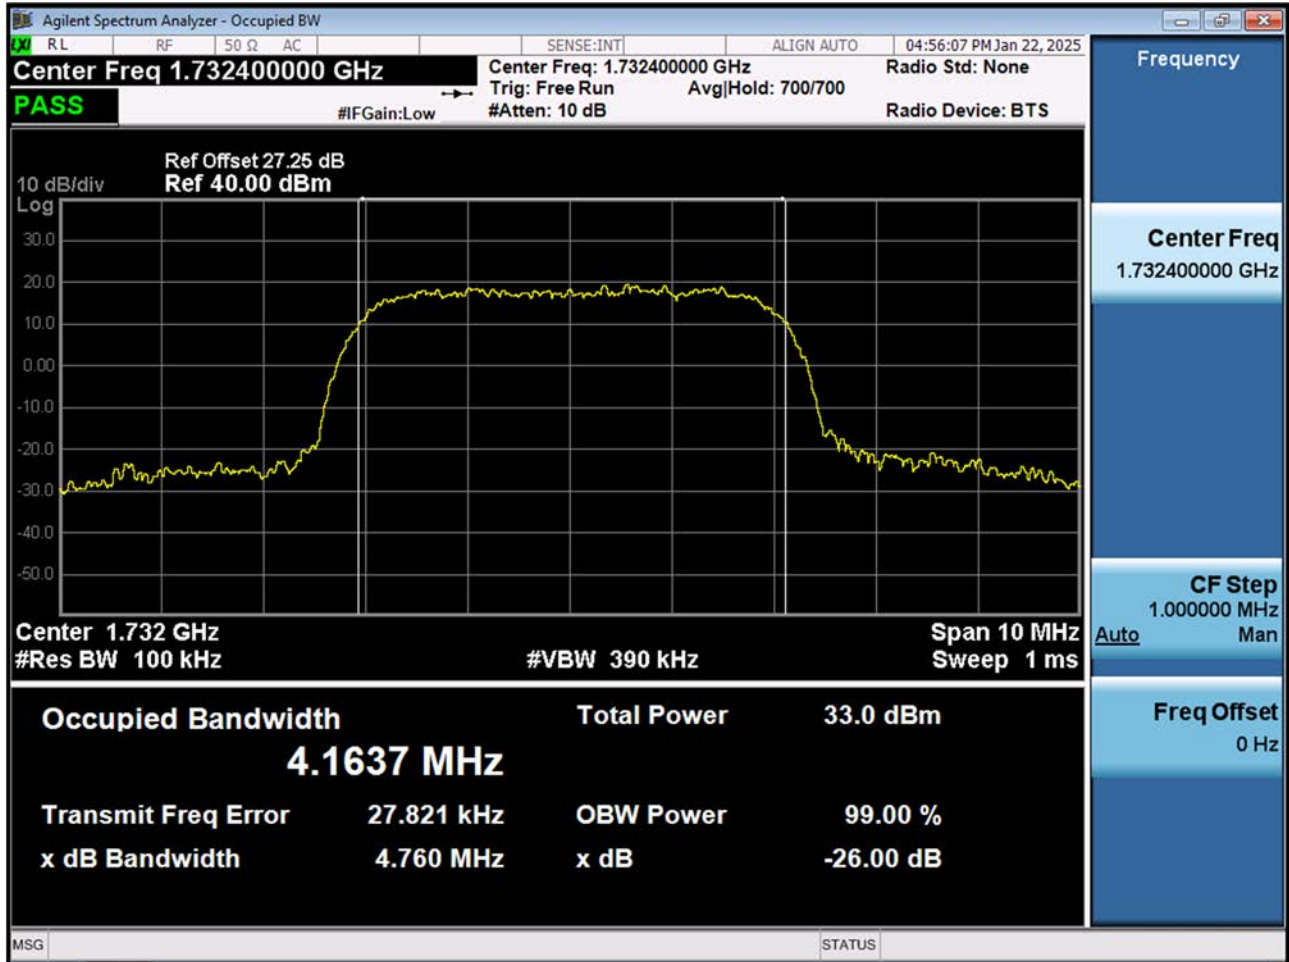




■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

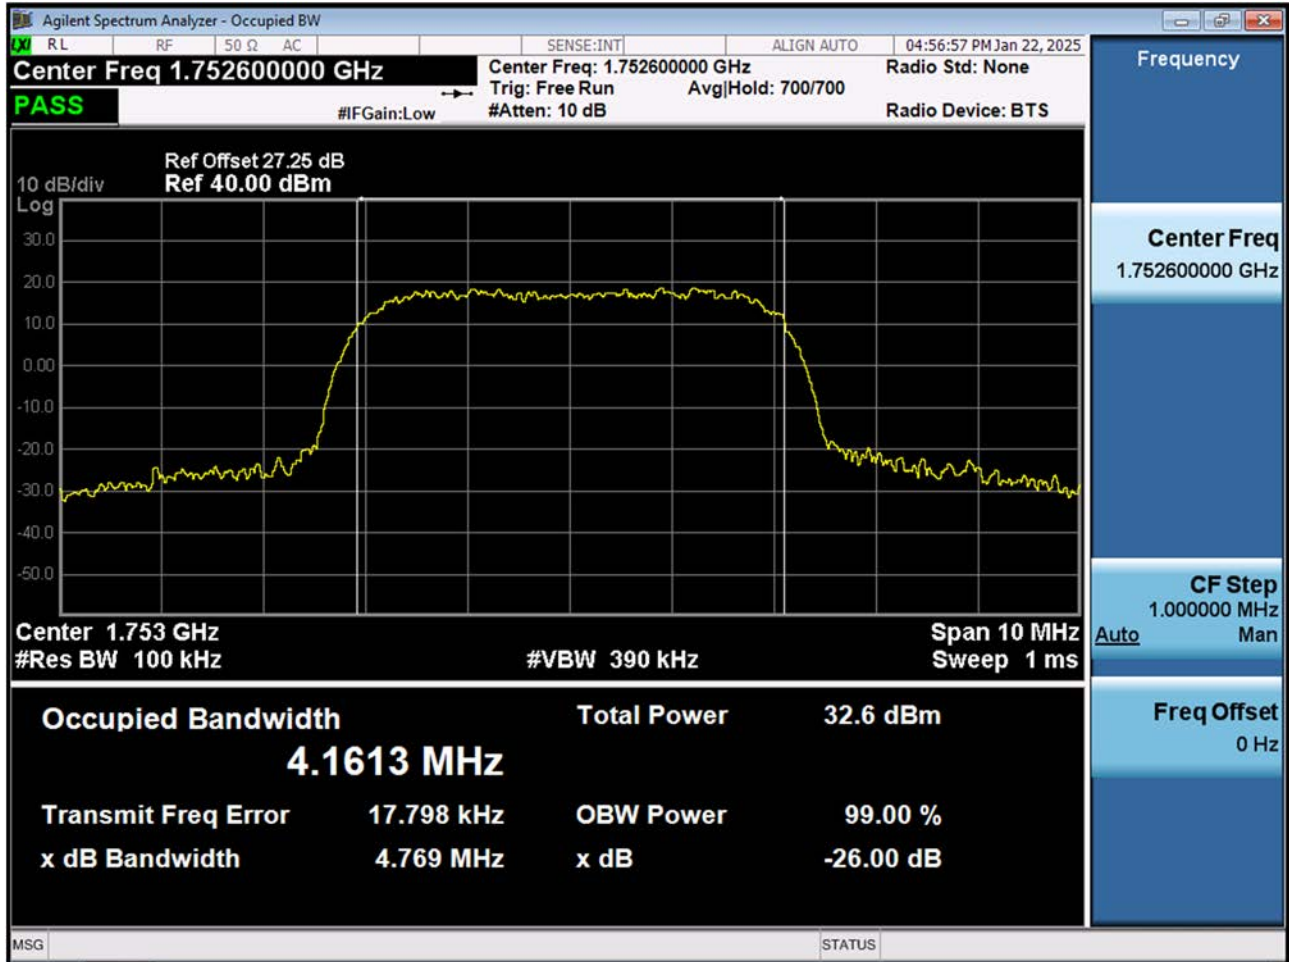


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P<sub>pk</sub>

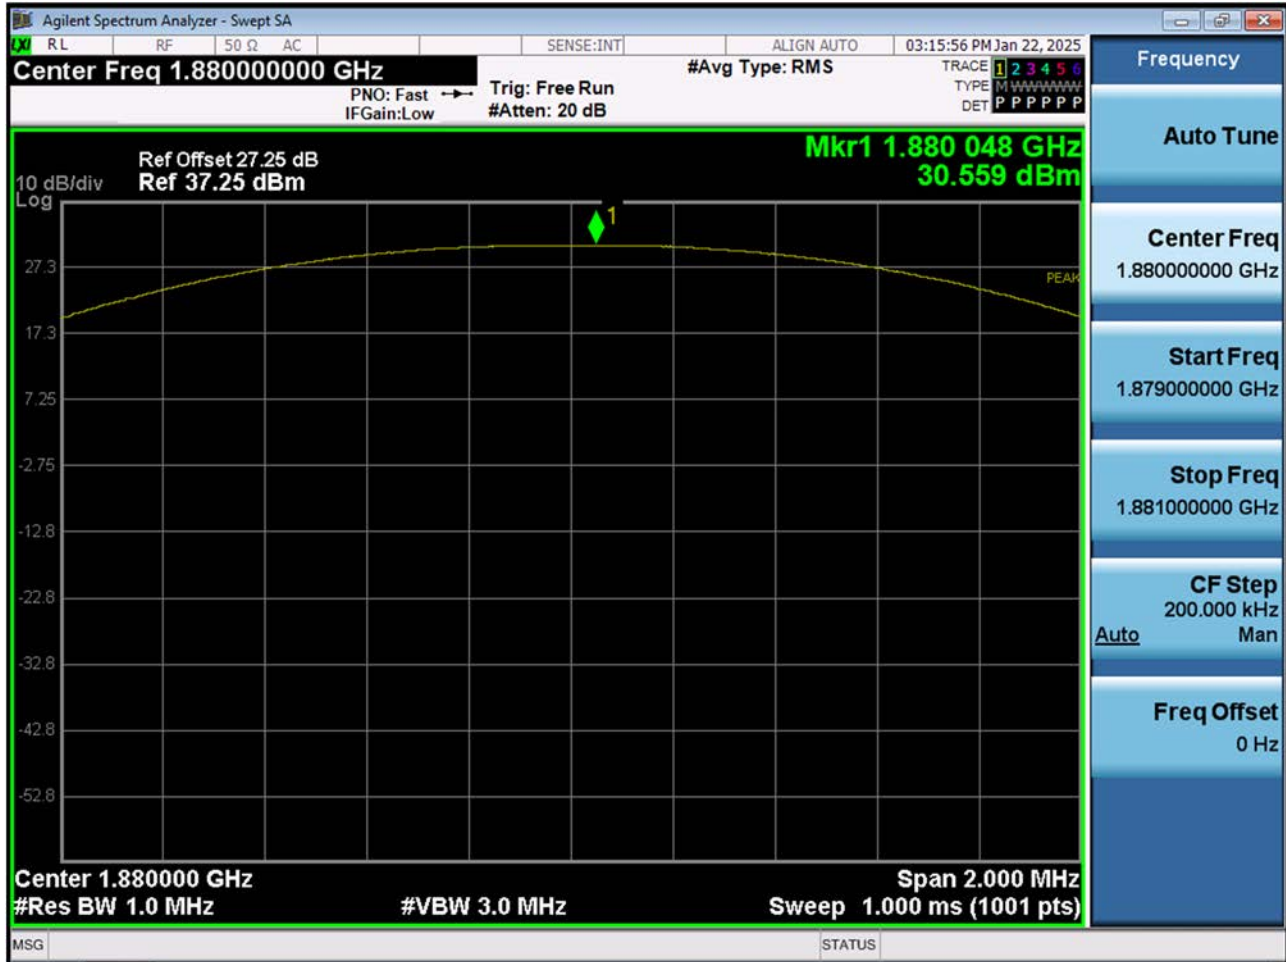





■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio  $P_{Avg}$

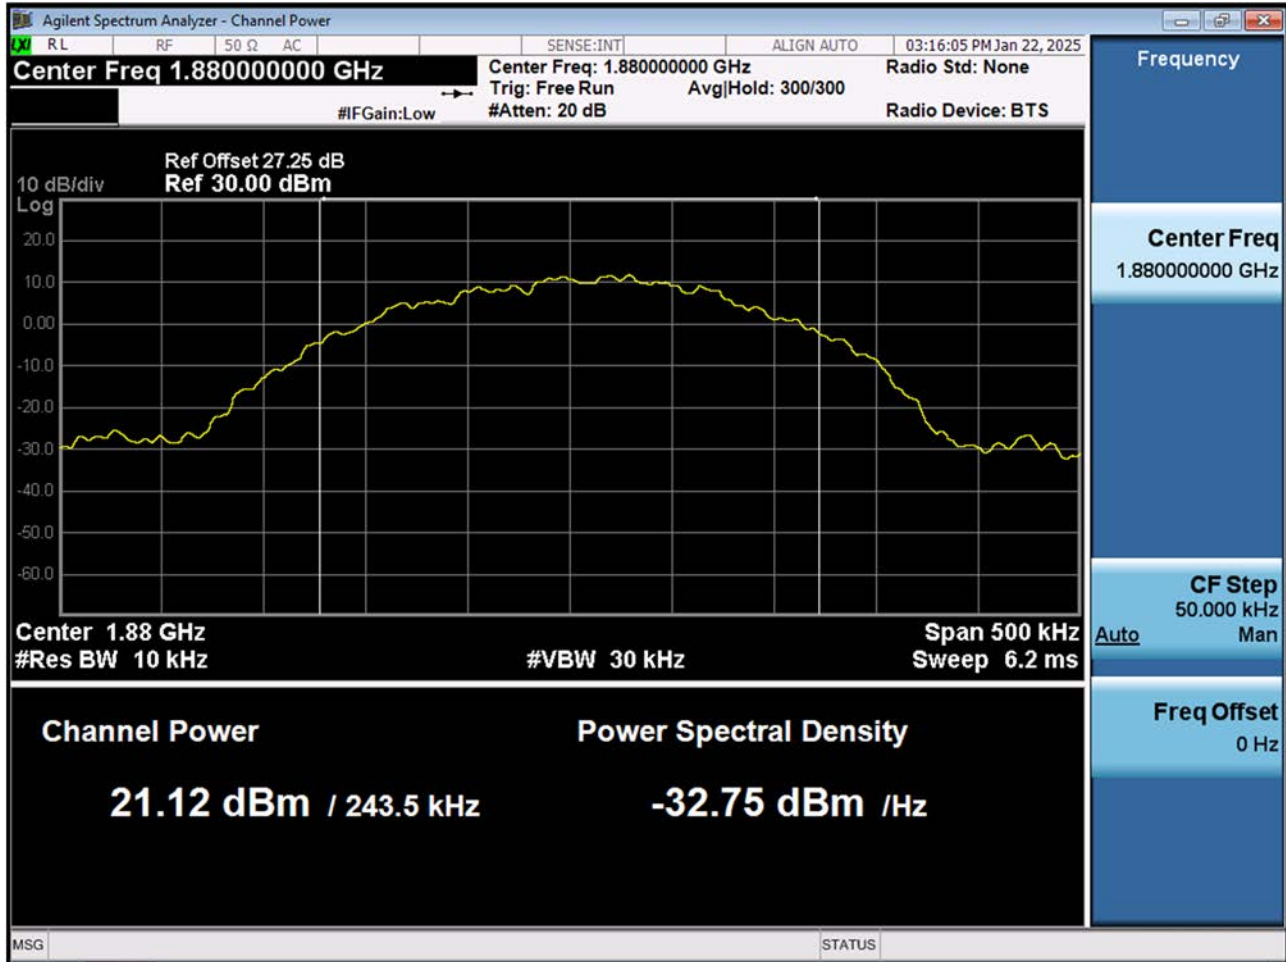


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

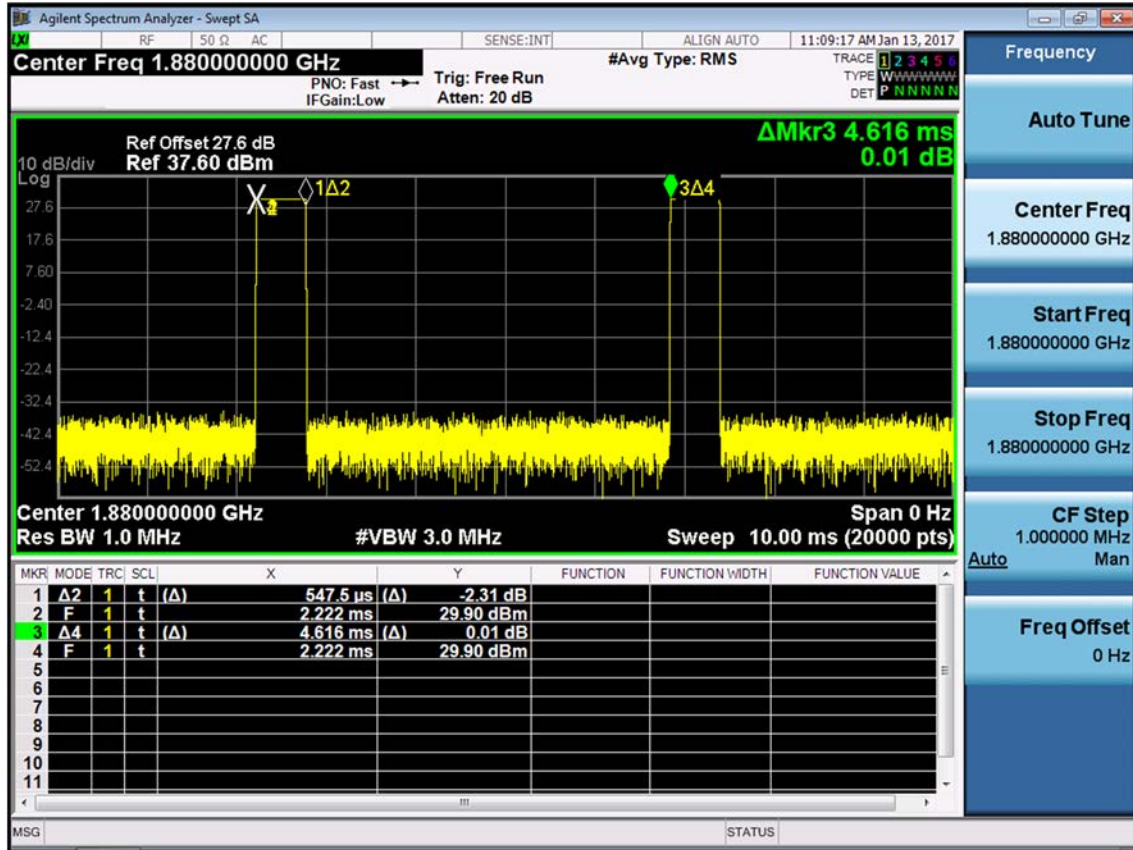


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

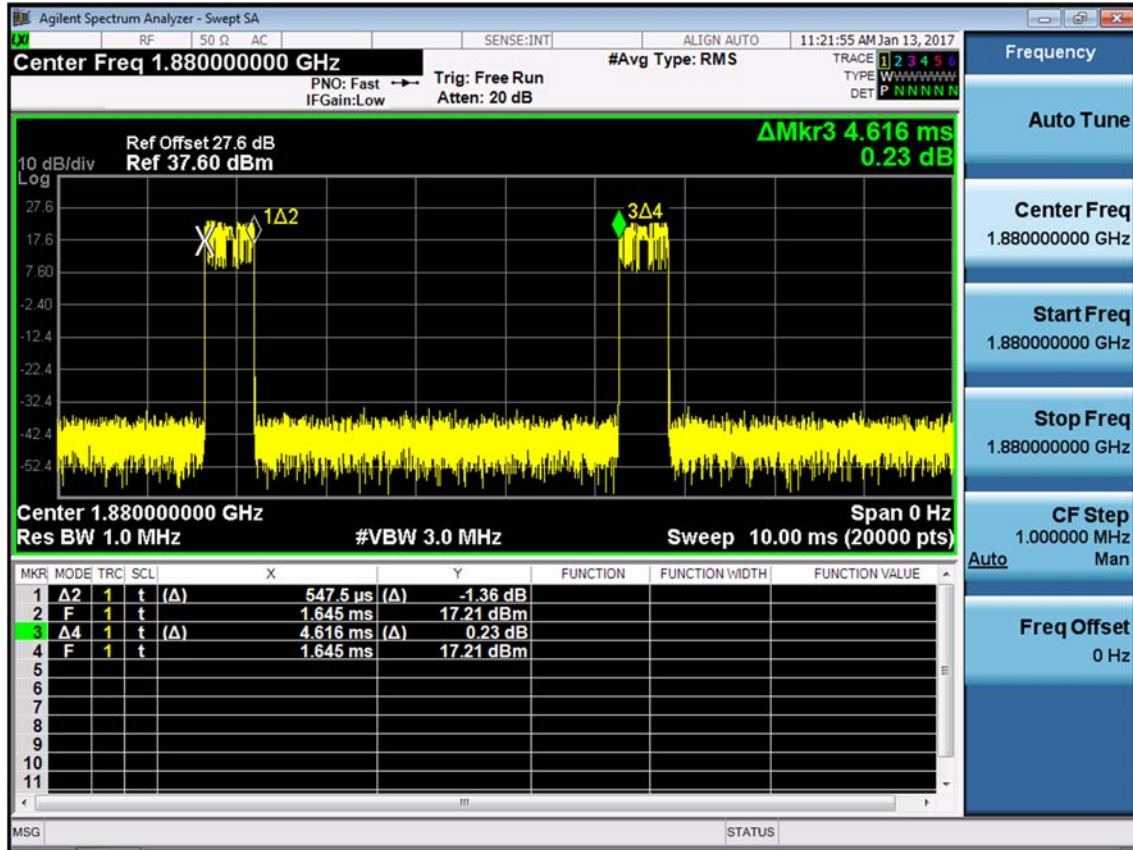


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio  $P_{Pk}$

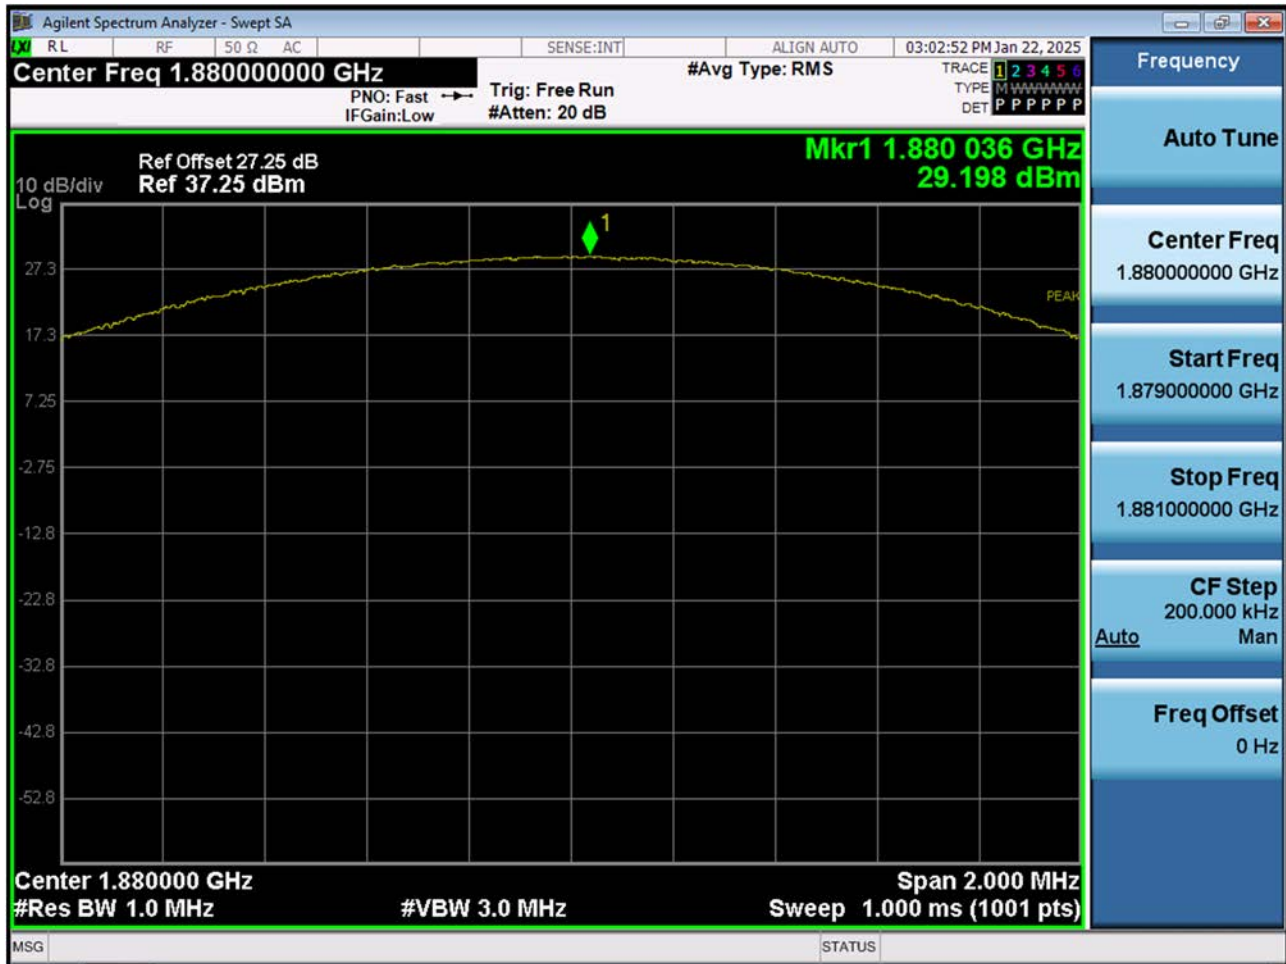

■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio  $P_{Avg}$

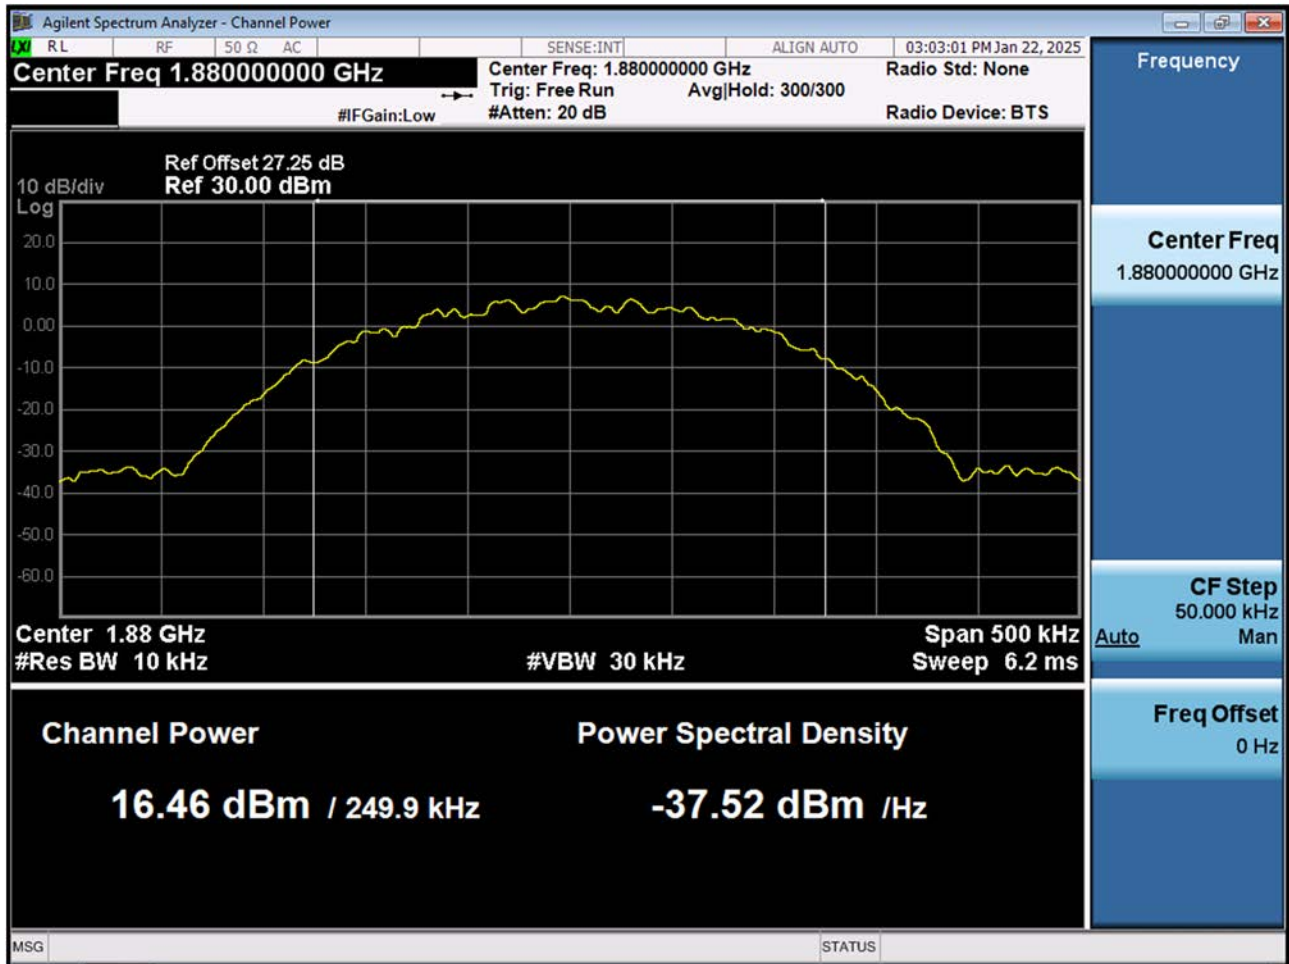


■ GSM850 MODE (190 CH.) Peak-to-Average Ratio

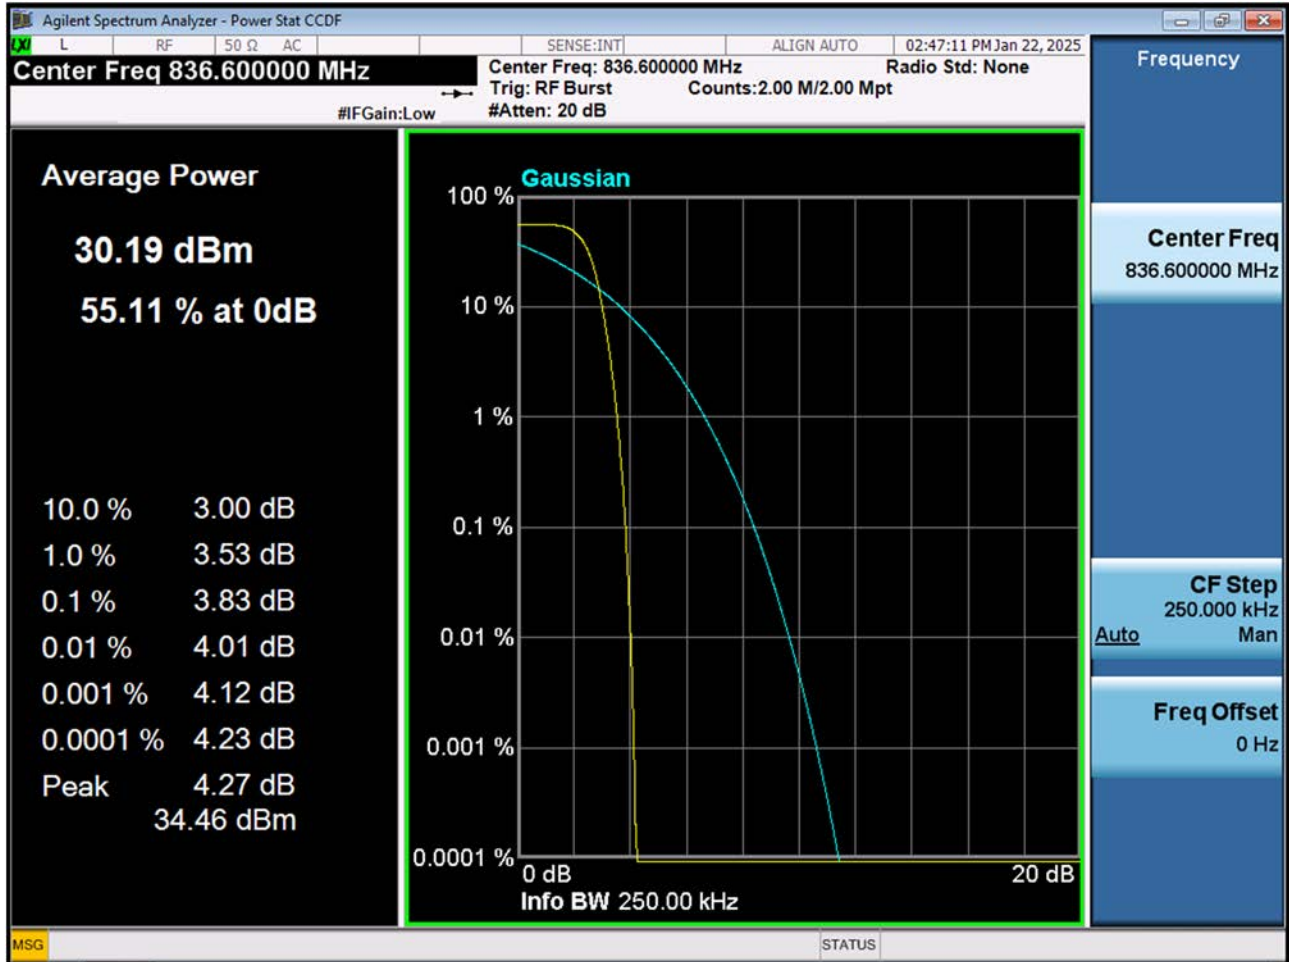




■ GSM850 EDGE (190 CH.) Peak-to-Average Ratio

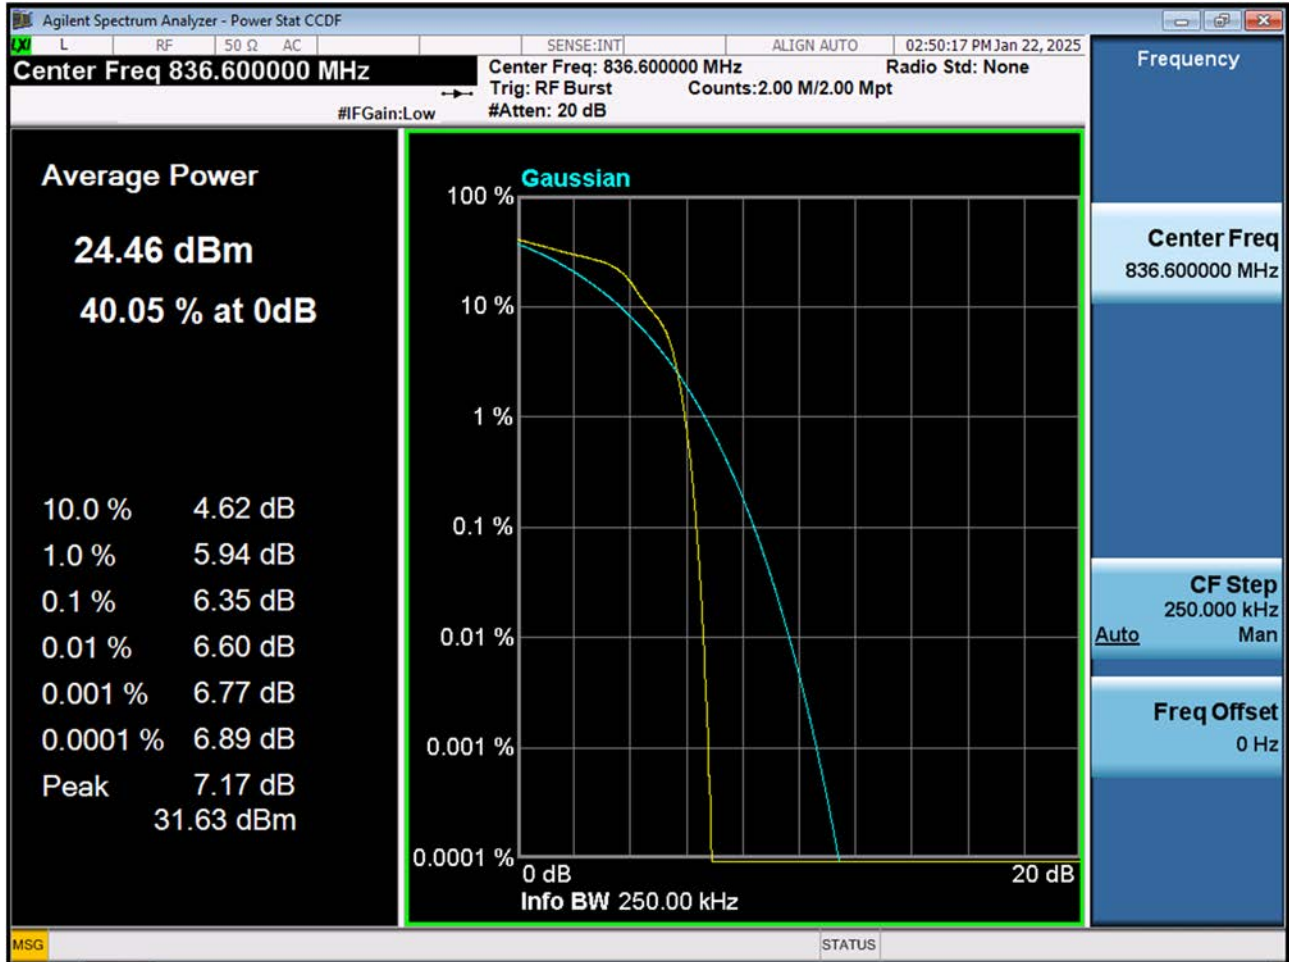


■ WCDMA850 MODE (4408 CH.) Peak-to-Average Ratio

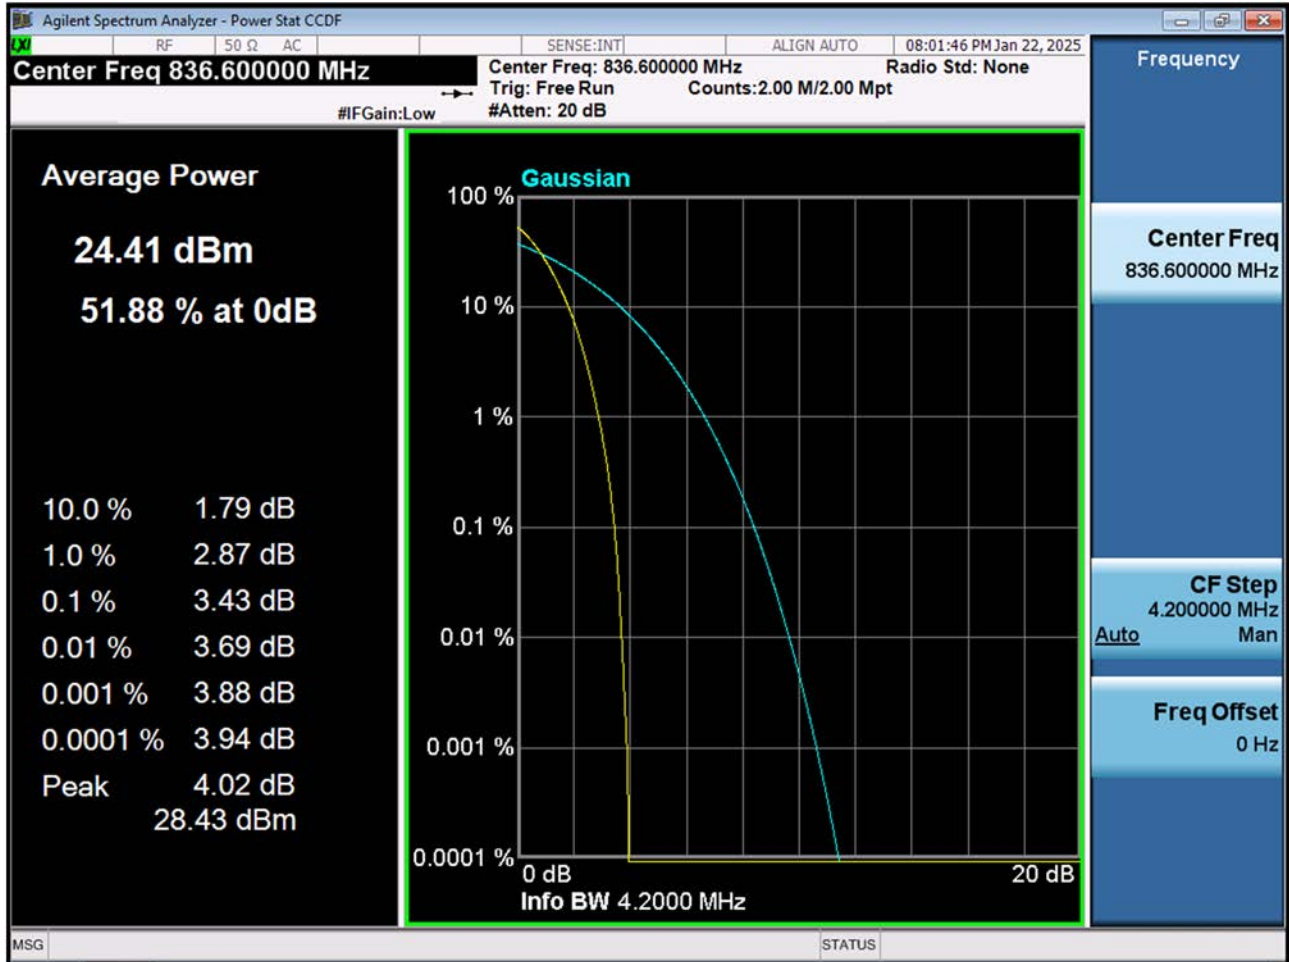




■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

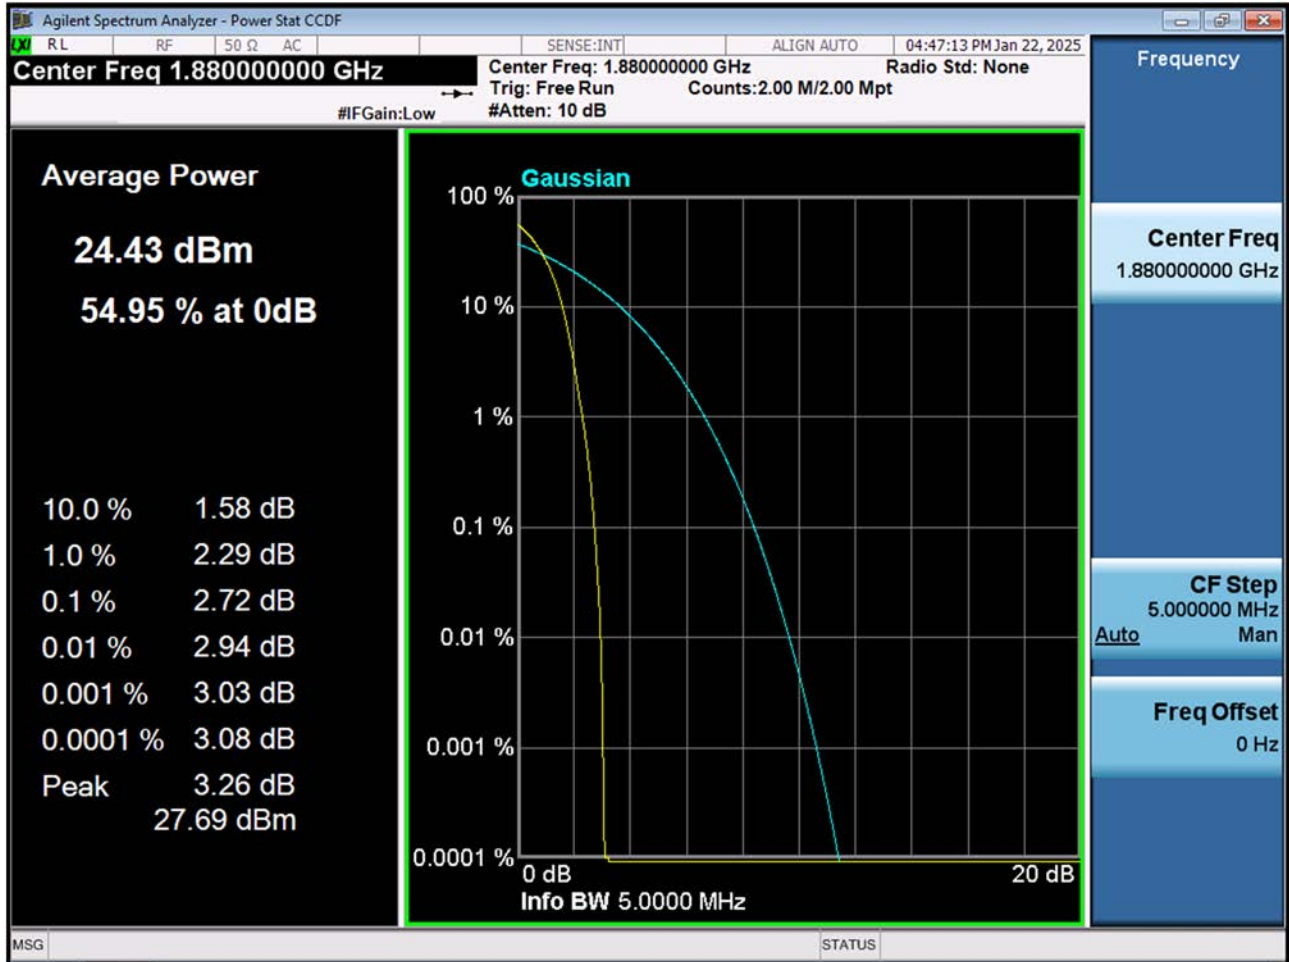

■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

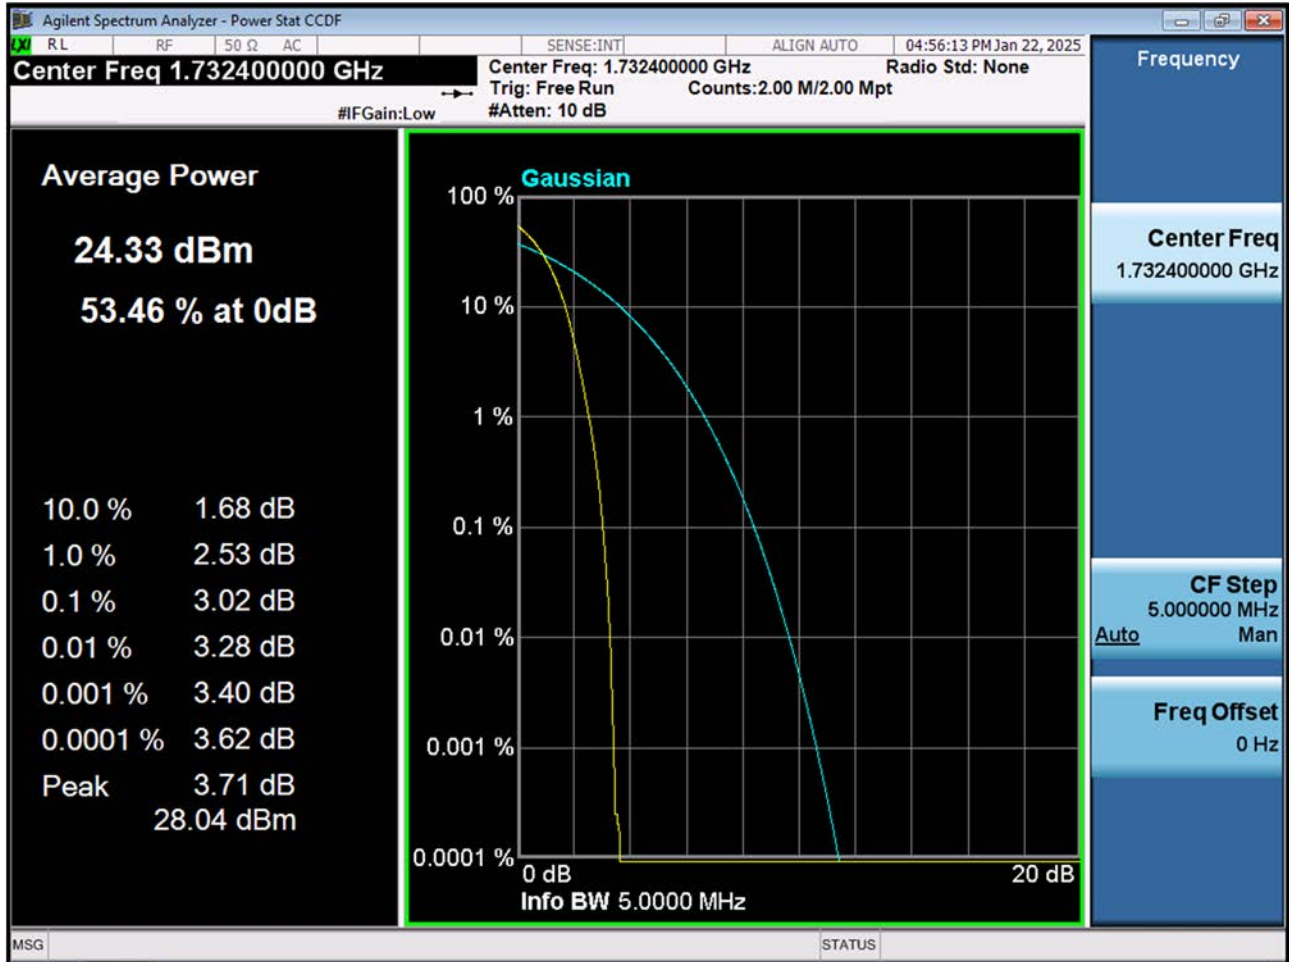

The screenshot displays the Agilent Spectrum Analyzer interface. The main plot area shows a yellow trace representing the signal spectrum. The y-axis is labeled "10 dB/div Log" and ranges from -62.9 to 17.1 dBm. The x-axis represents frequency, with major grid lines every 10 MHz. A green horizontal reference line is set at -13.00 dBm. The plot shows a signal that rises from approximately -55 dBm at 820 MHz to a peak of about -10 dBm around 824 MHz, then falls back to approximately -45 dBm at 828 MHz.

**Top Panel:**

- Center Freq: 824.000000 MHz
- #Avg Type: RMS
- PNO: Wide → Trig: Free Run
- IFGain: Low #Atten: 20 dB
- TRAC 1 2 3 4 5 6
- TYPE M W W W W W W W W W
- DET A A A A A A


**Right Panel:**

- Frequency
- Auto Tune
- Center Freq: 824.000000 MHz
- Start Freq: 823.500000 MHz
- Stop Freq: 824.500000 MHz
- CF Step: 100.000 kHz
- Man Auto
- Freq Offset: 0 Hz


**Bottom Panel:**

- Center 824.0000 MHz
- #Res BW 3.9 kHz
- #VBW 12 kHz
- Span 1.000 MHz
- #Sweep 5.000 s (1001 pts)


■ GSM850 MODE (128 CH.) Block Edge 2

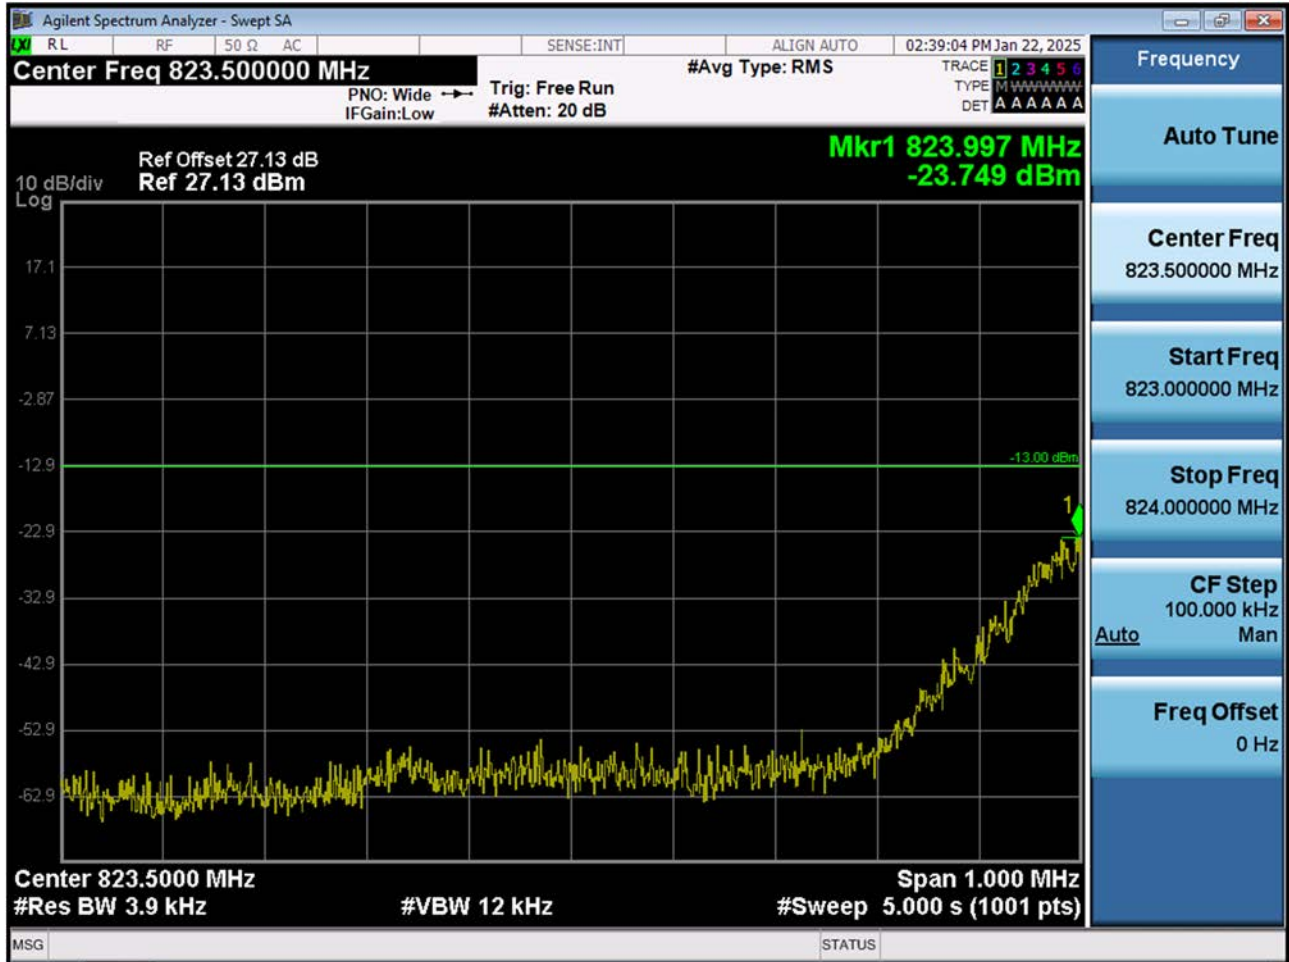

■ GSM850 MODE (128 CH.) Block Edge 3

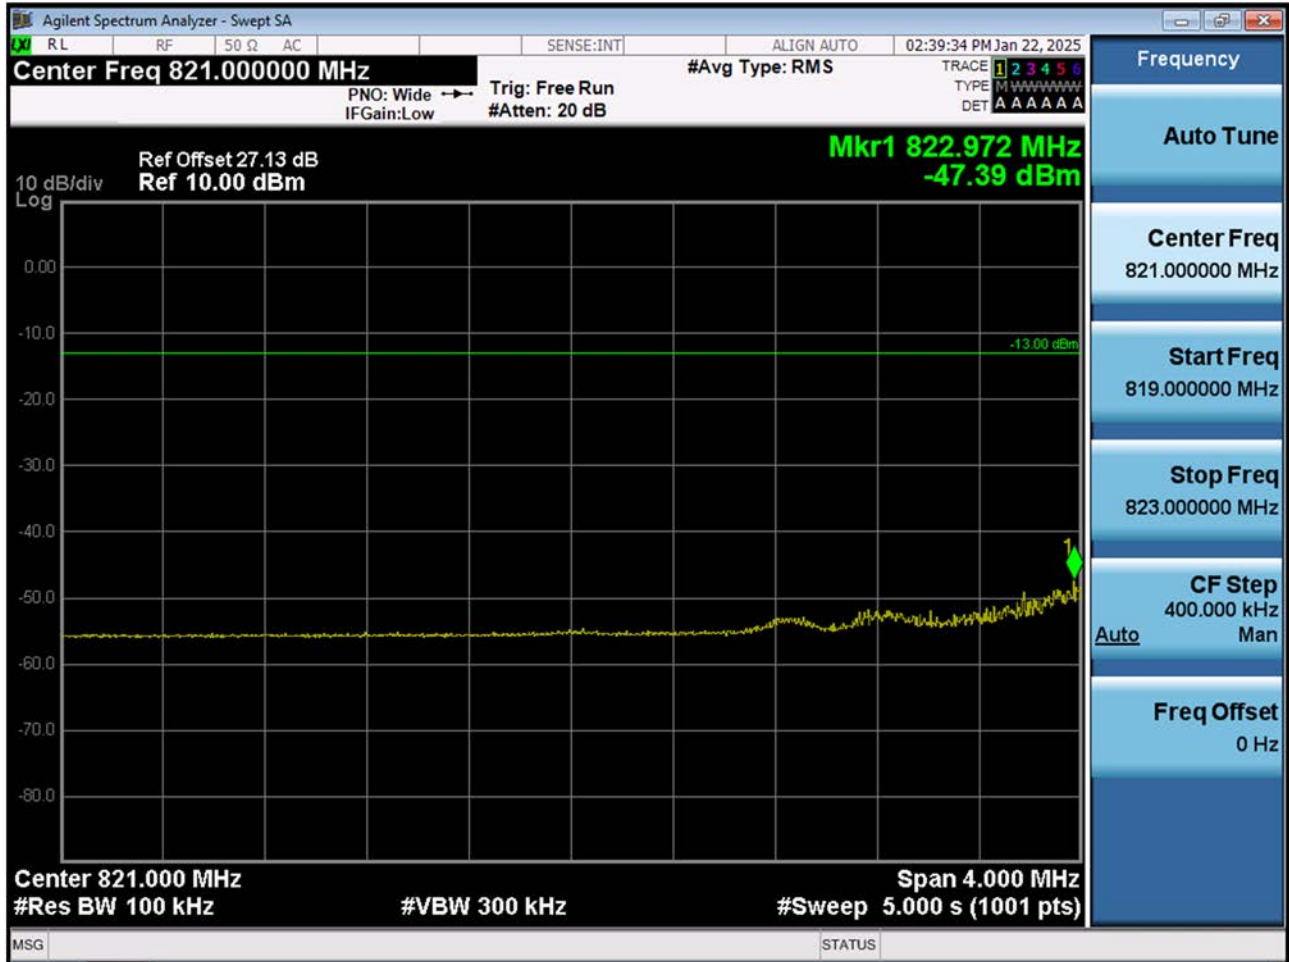


■ GSM850 MODE (251 CH.) Block Edge 1

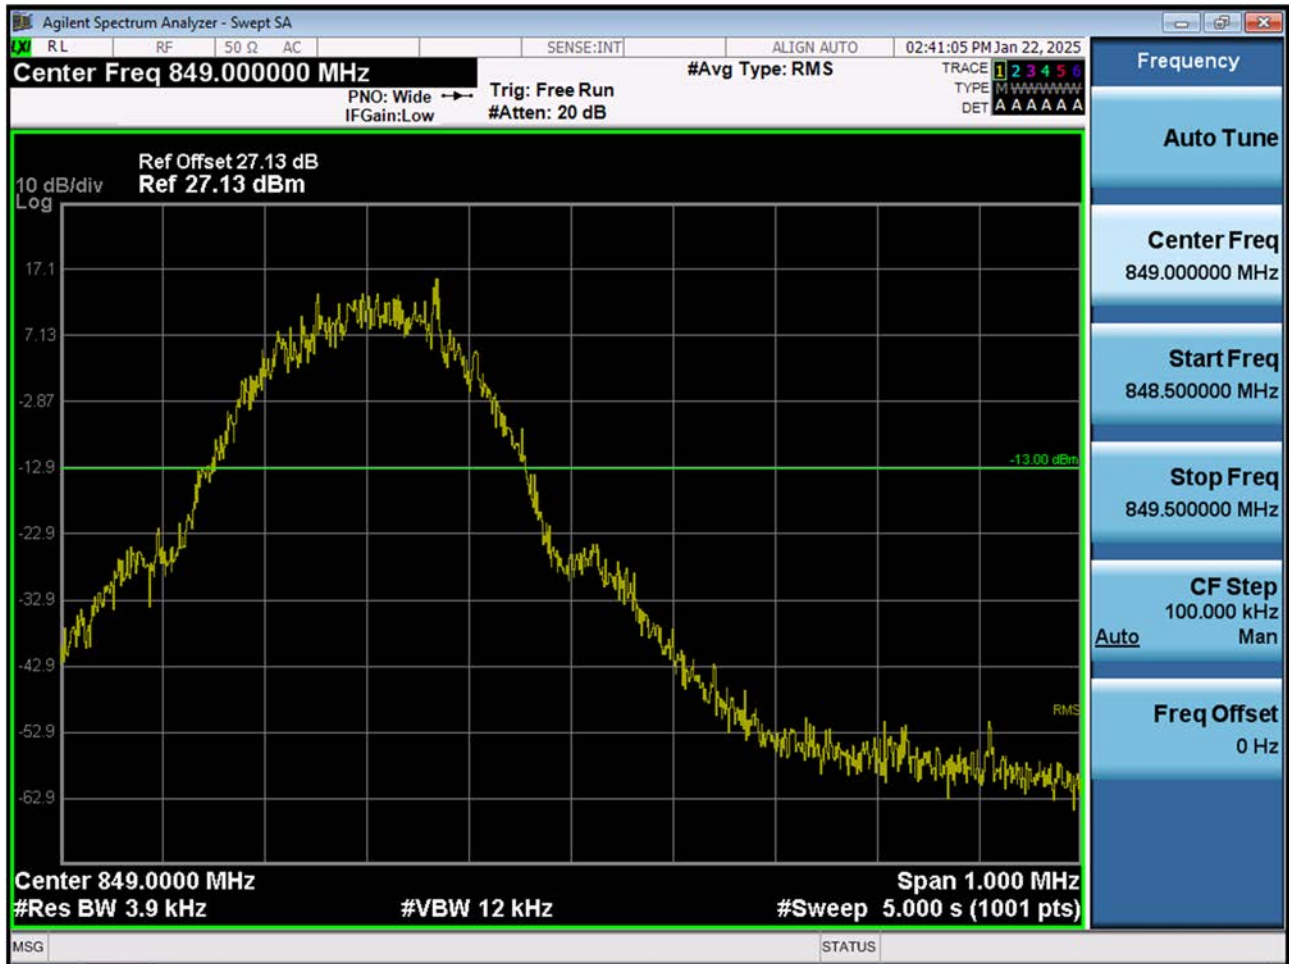




■ GSM850 MODE (251 CH.) Block Edge 2

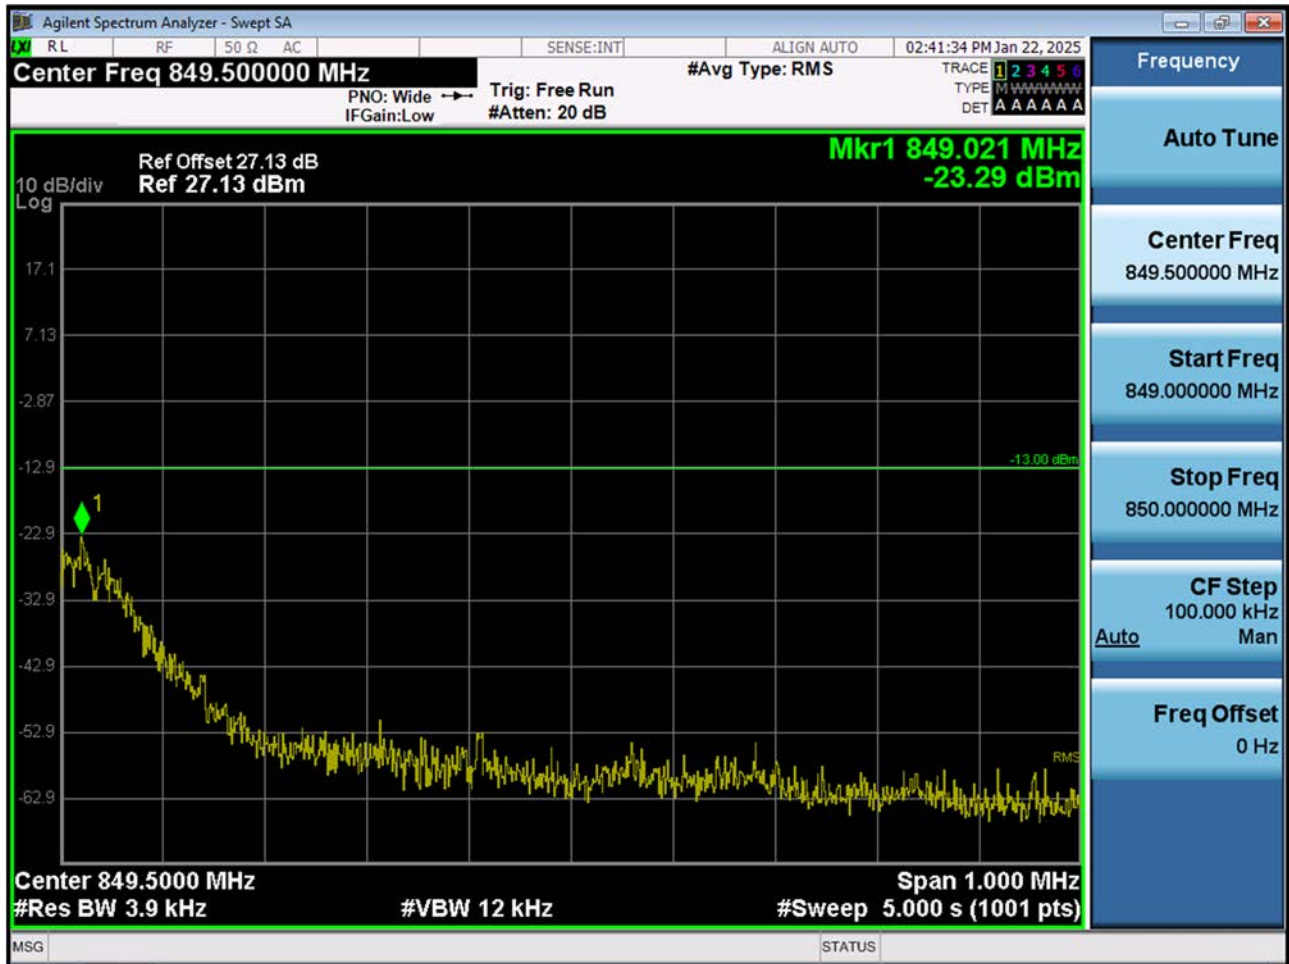


■ GSM850 MODE (251 CH.) Block Edge 3

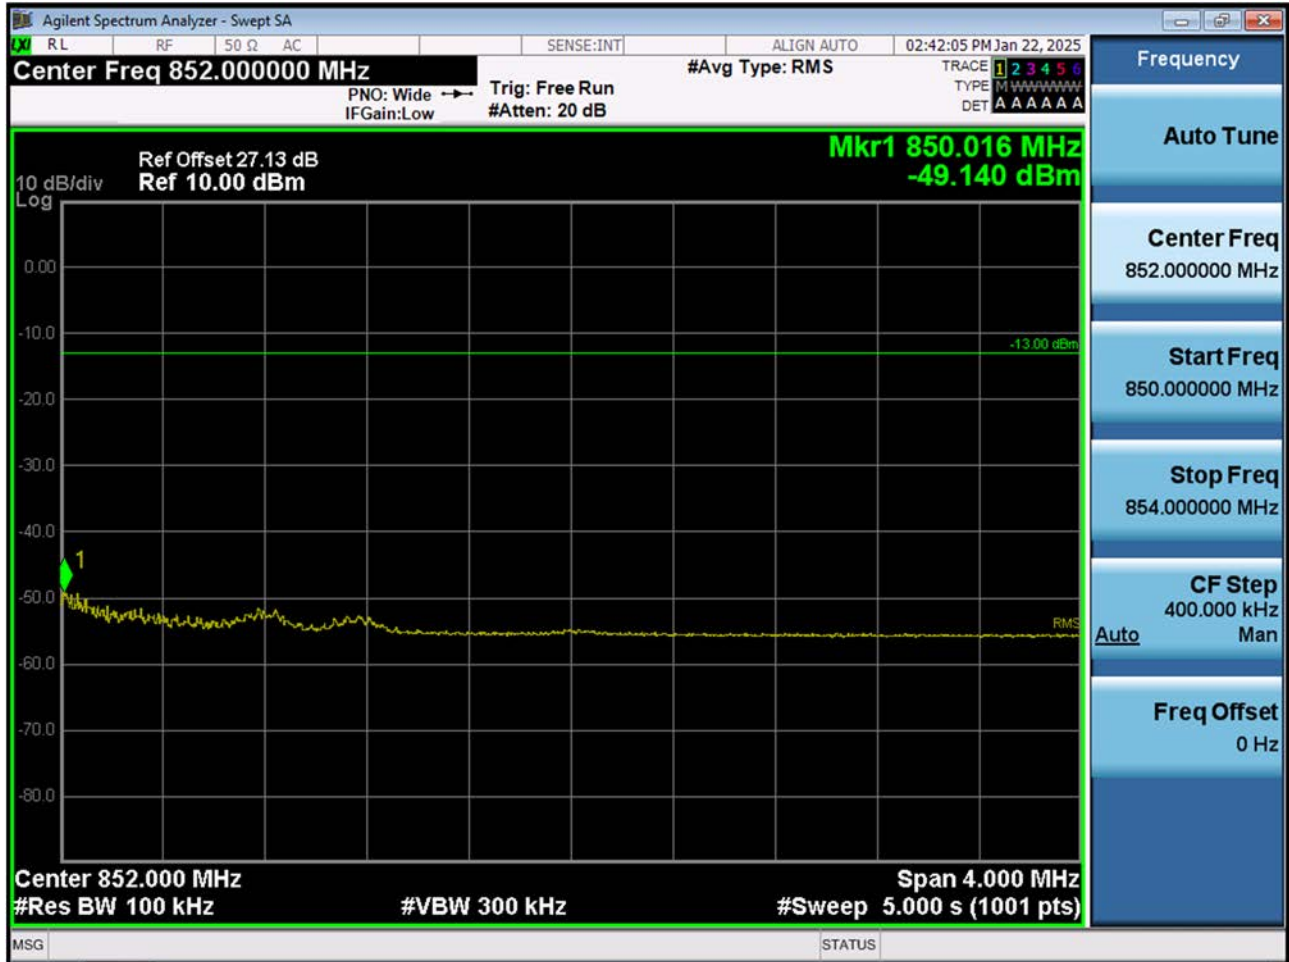





■ EDGE MODE (128 CH.) Block Edge 1

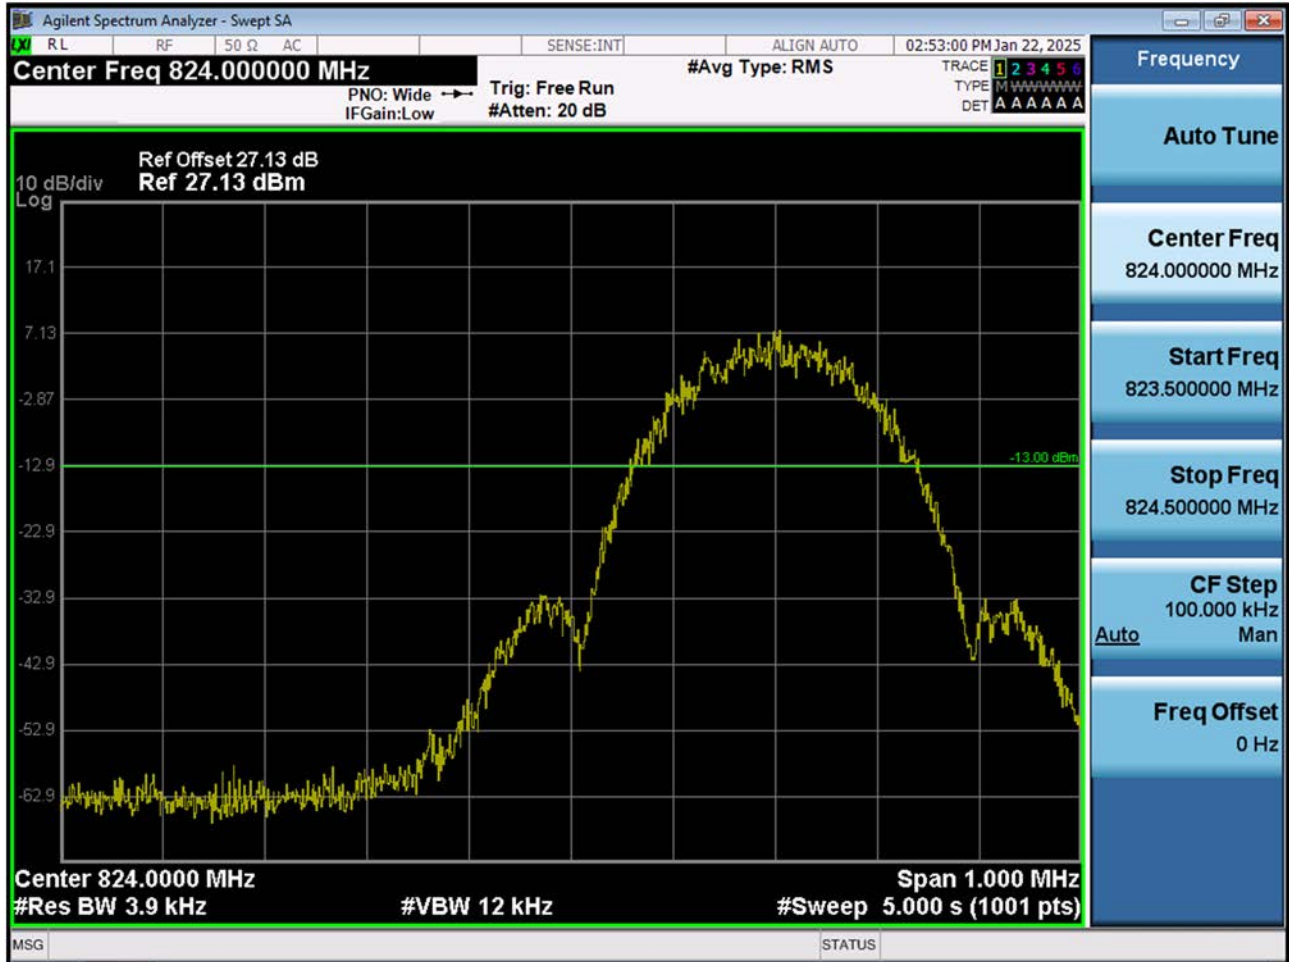


■ EDGE MODE (128 CH.) Block Edge 2

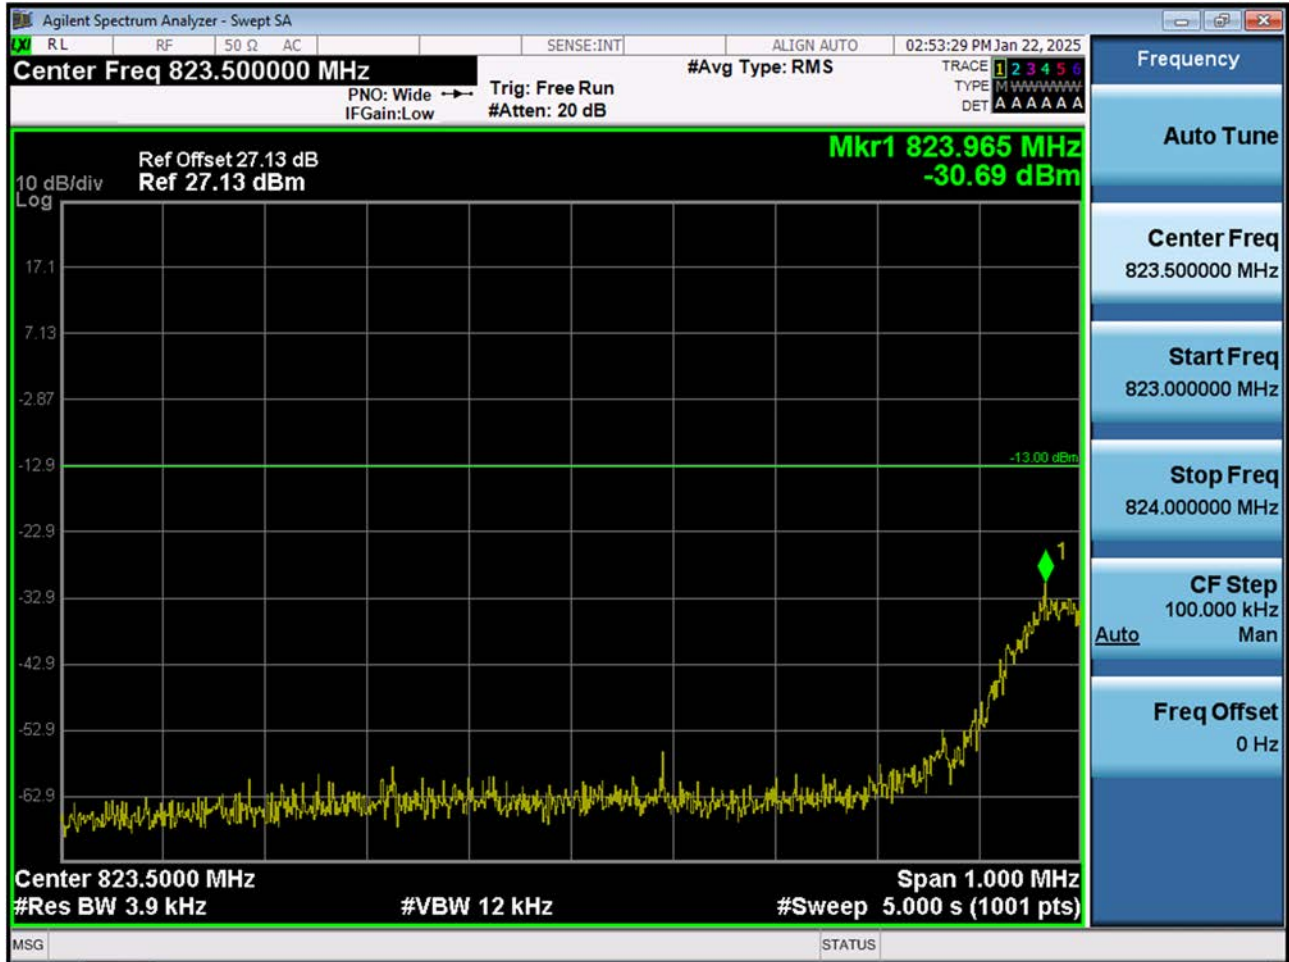


■ EDGE MODE (128 CH.) Block Edge 3

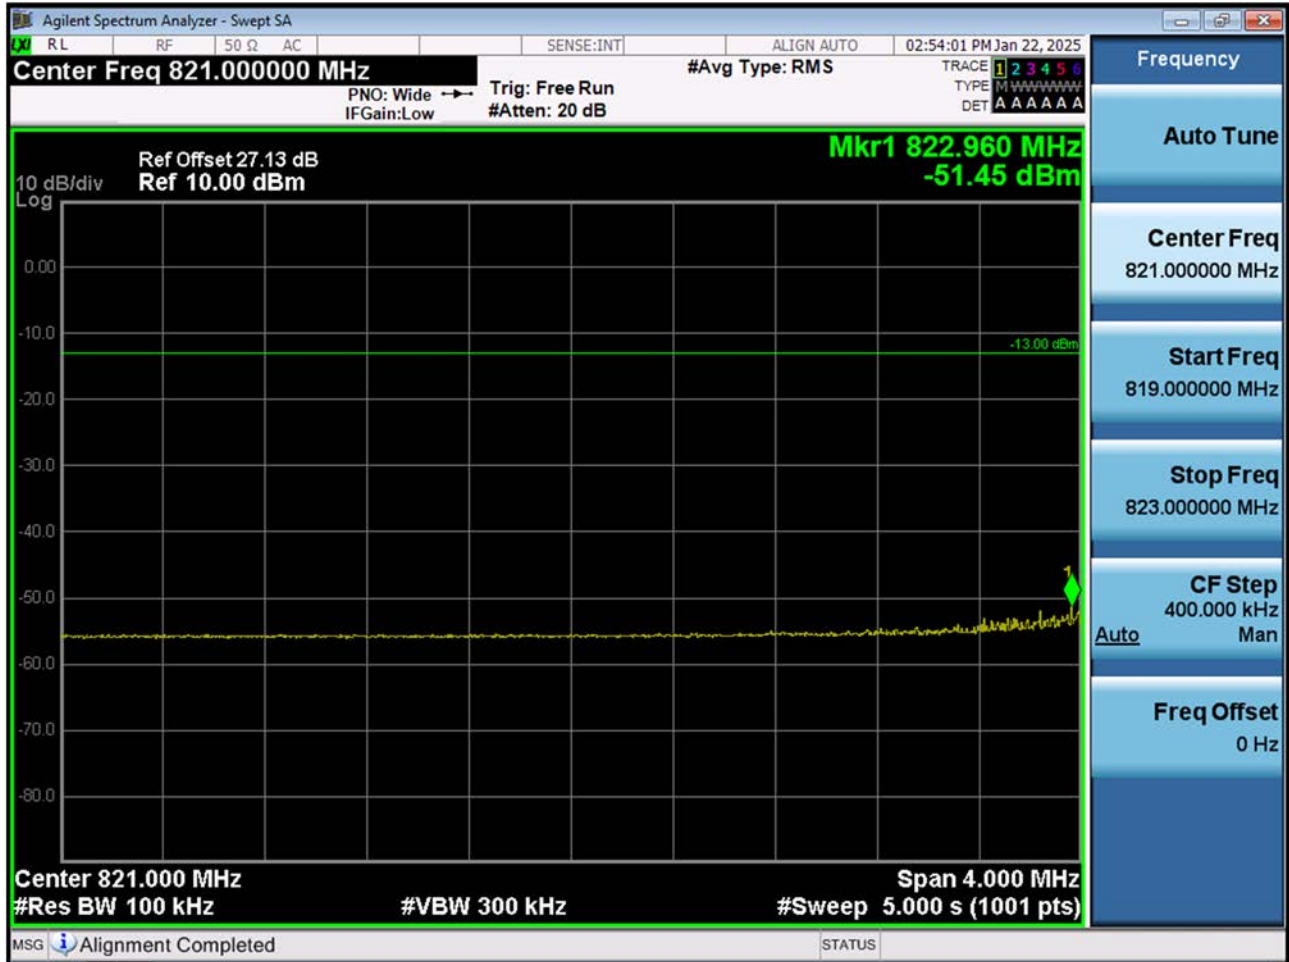


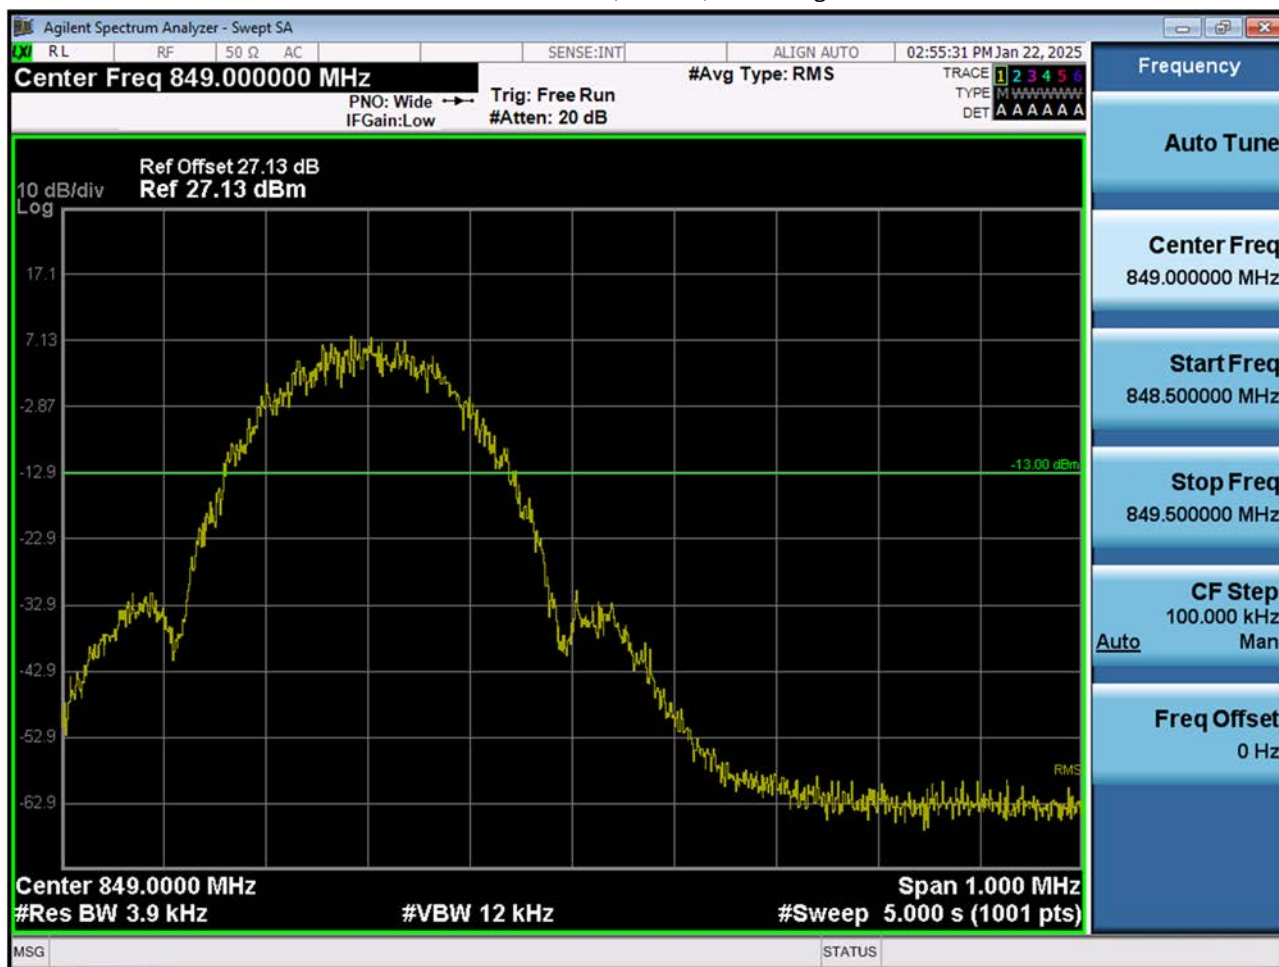

■ EDGE MODE (251 CH.) Block Edge 2

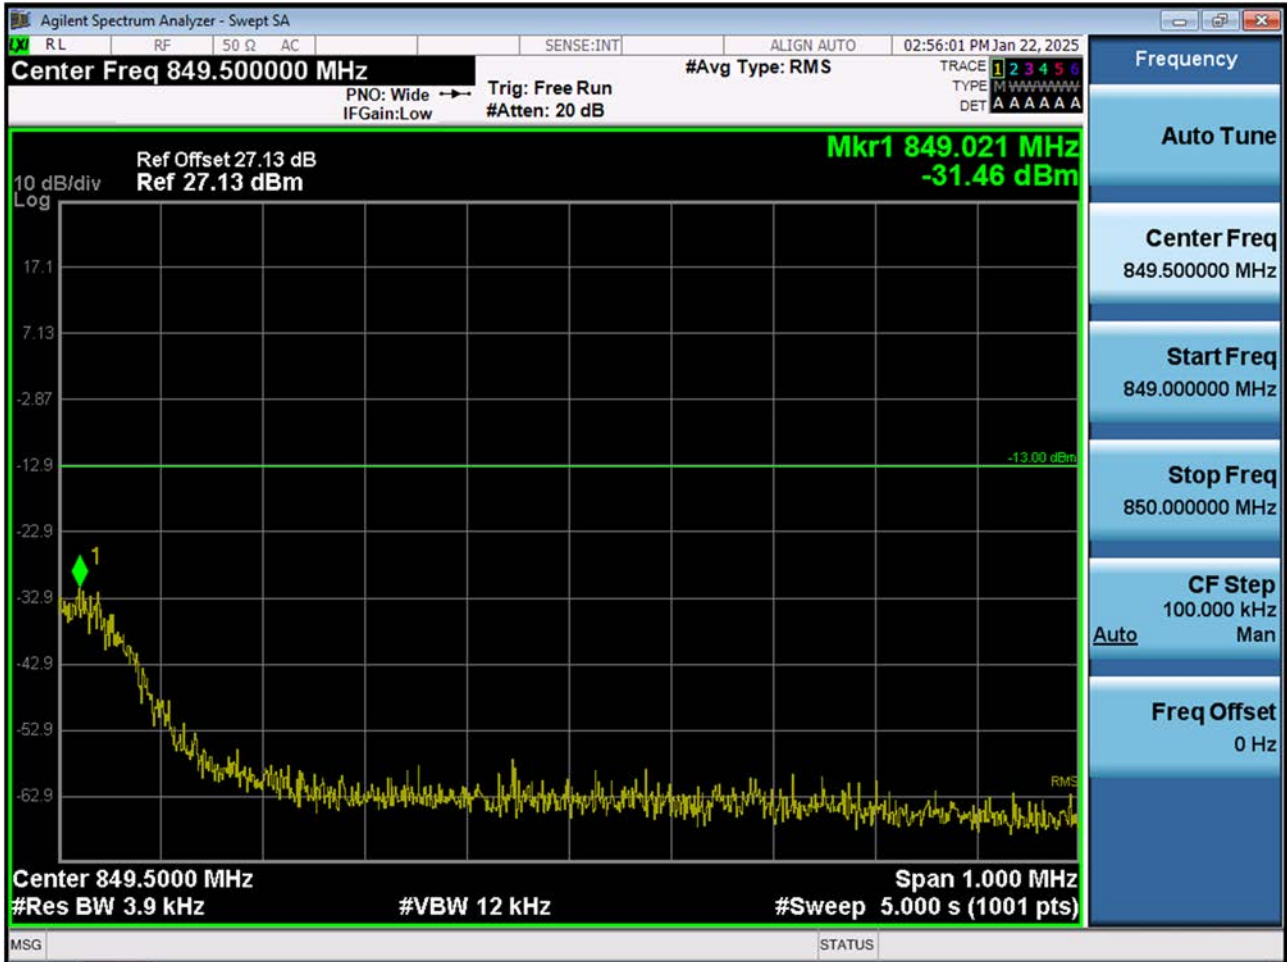


■ EDGE MODE (251 CH.) Block Edge 3

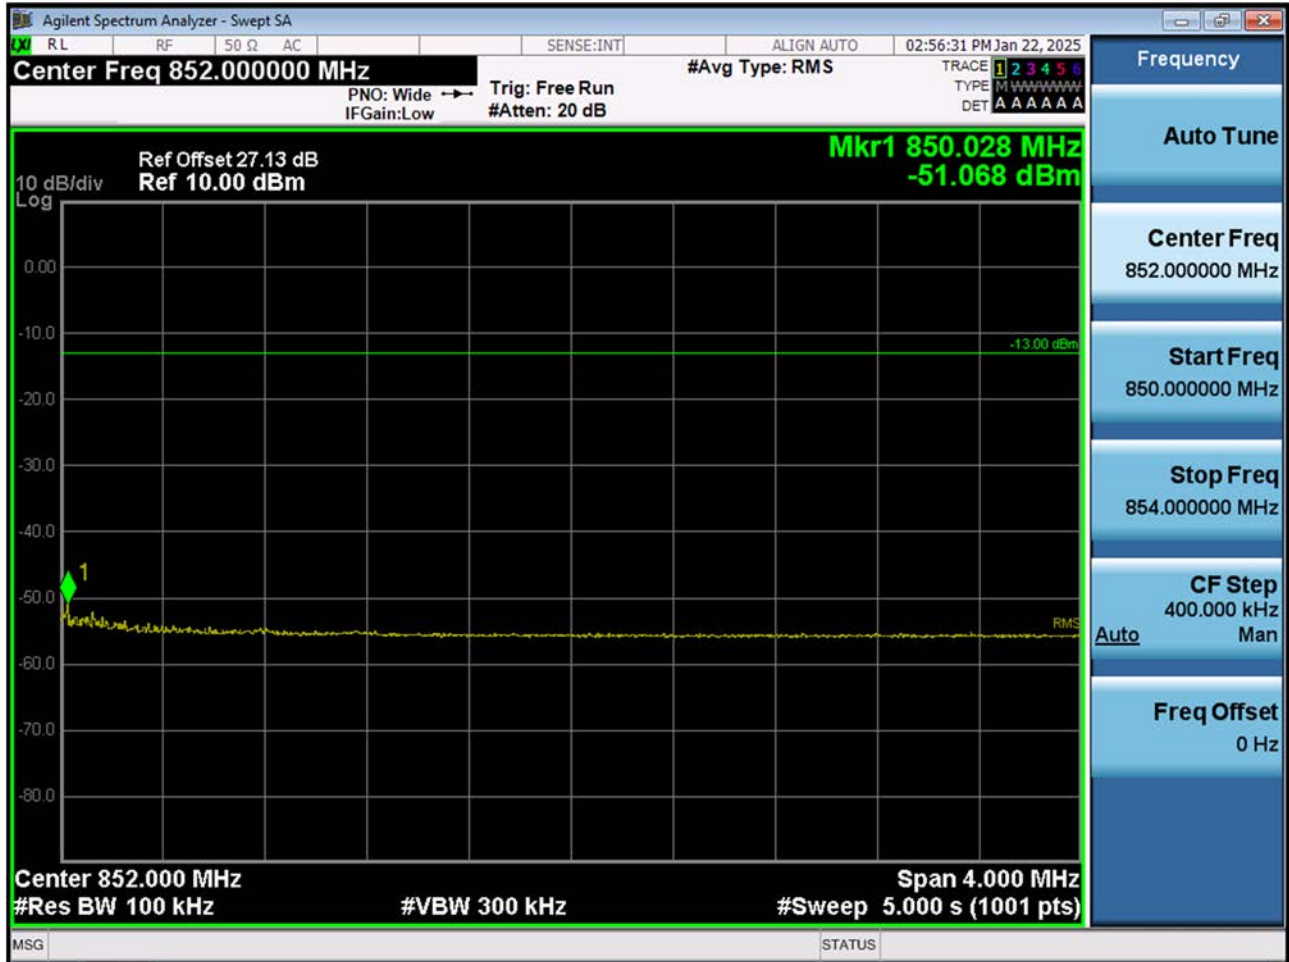




■ GSM1900 MODE (512 CH.) Block Edge 1

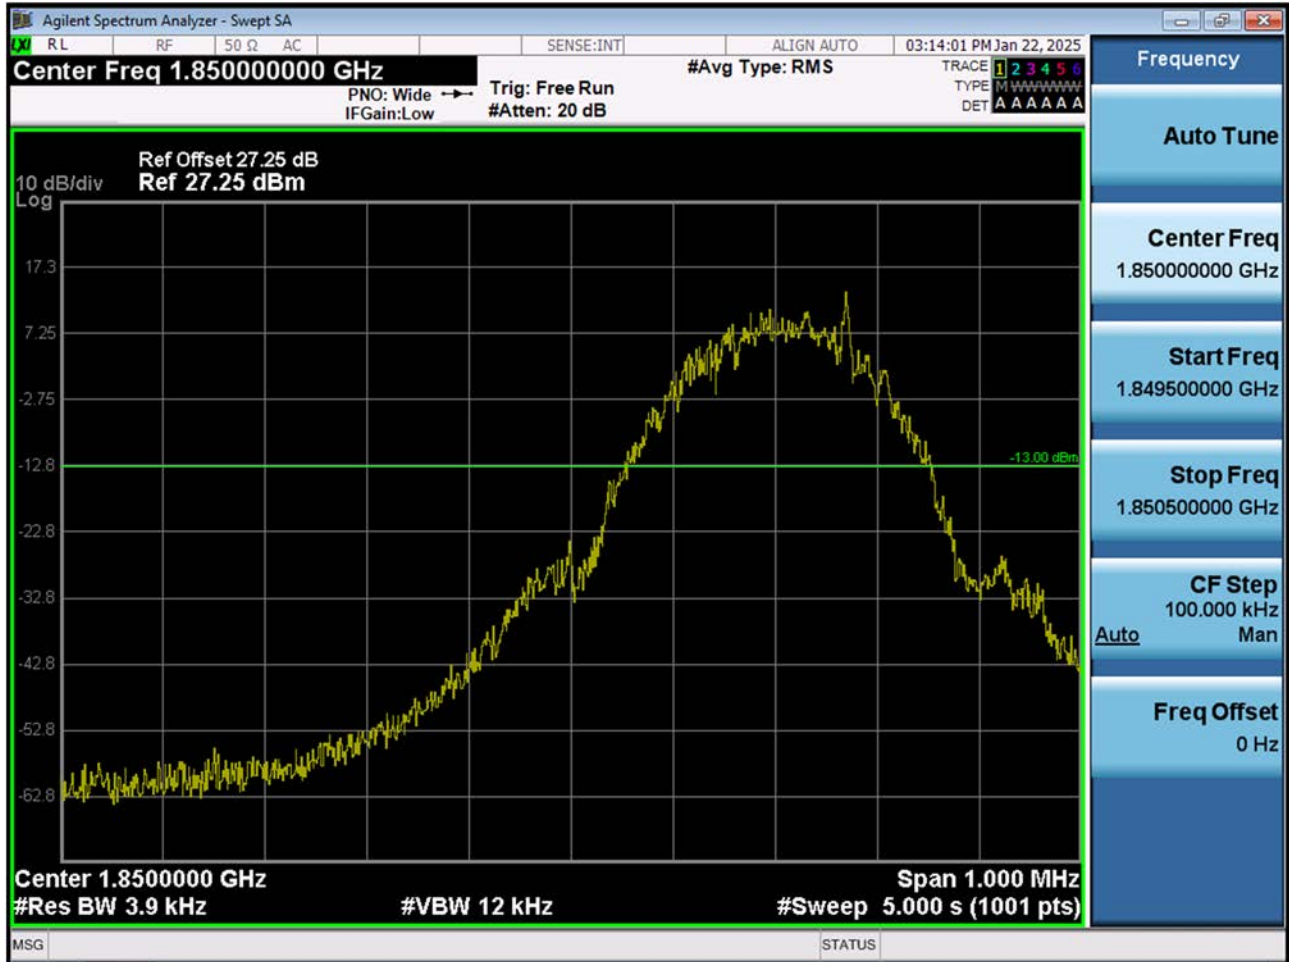

■ GSM1900 MODE (512 CH.) Block Edge 2

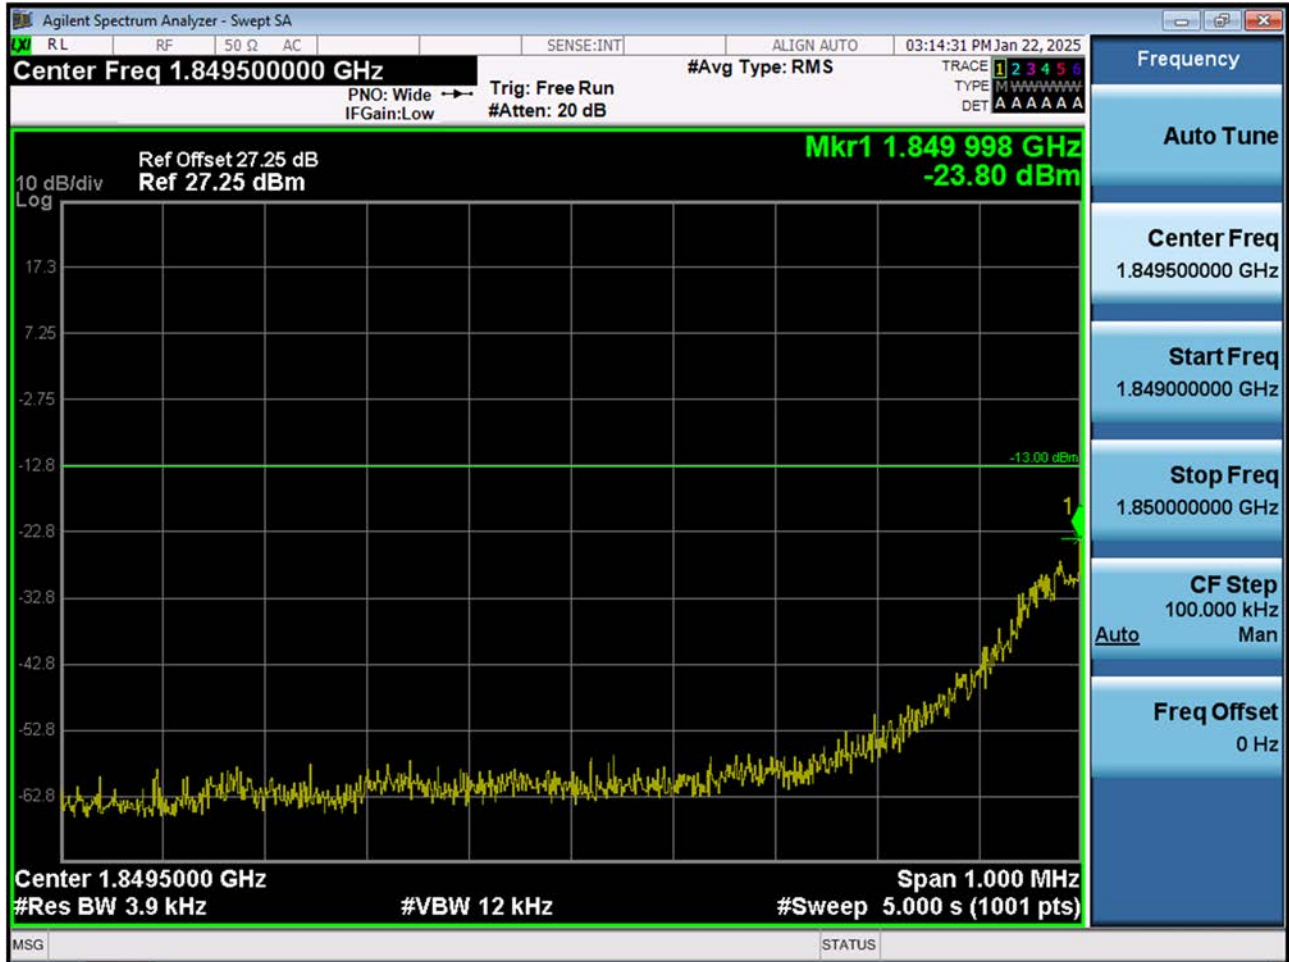




■ GSM1900 MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

$$\text{Calculation} = \text{Reading Value} + 10 \times \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -48.95 \text{ dBm} + 10 \text{ dB} = -38.95 \text{ dBm}$$


■ GSM1900 MODE (810 CH.) Block Edge 1

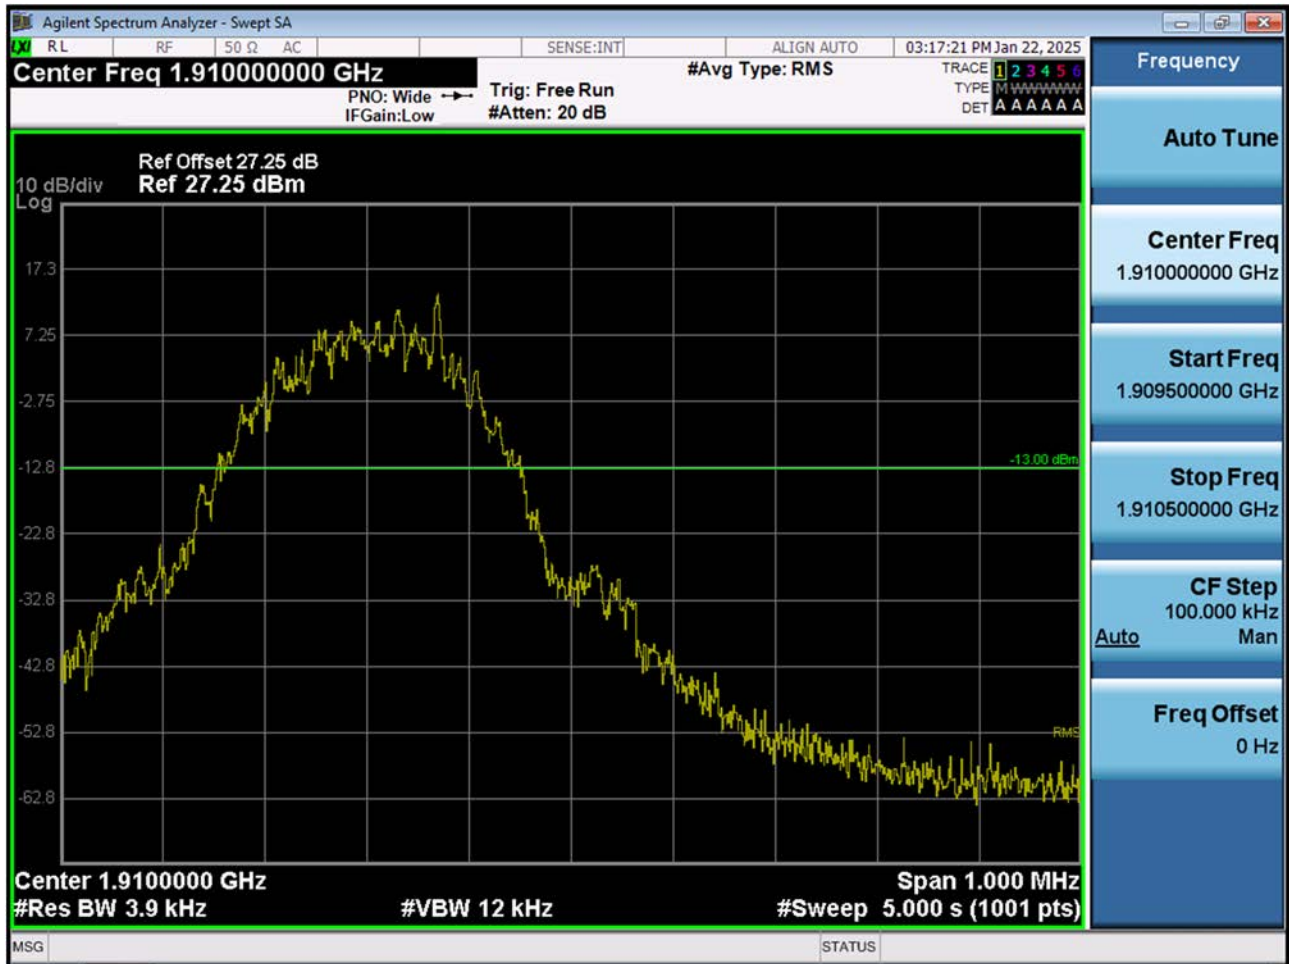

■ GSM1900 MODE (810 CH.) Block Edge 2

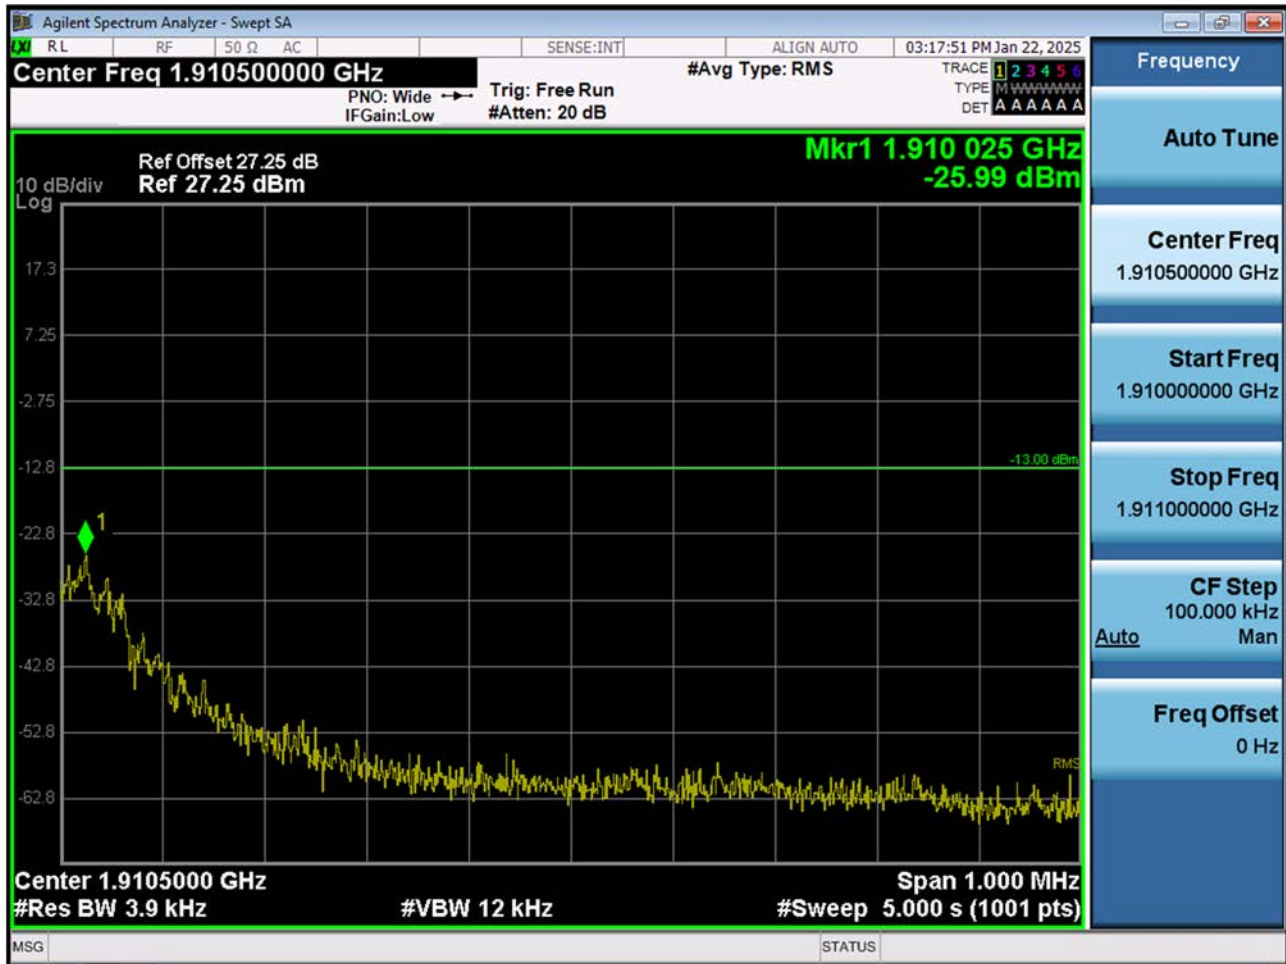


■ GSM1900 MODE (810 CH.) Block Edge 3

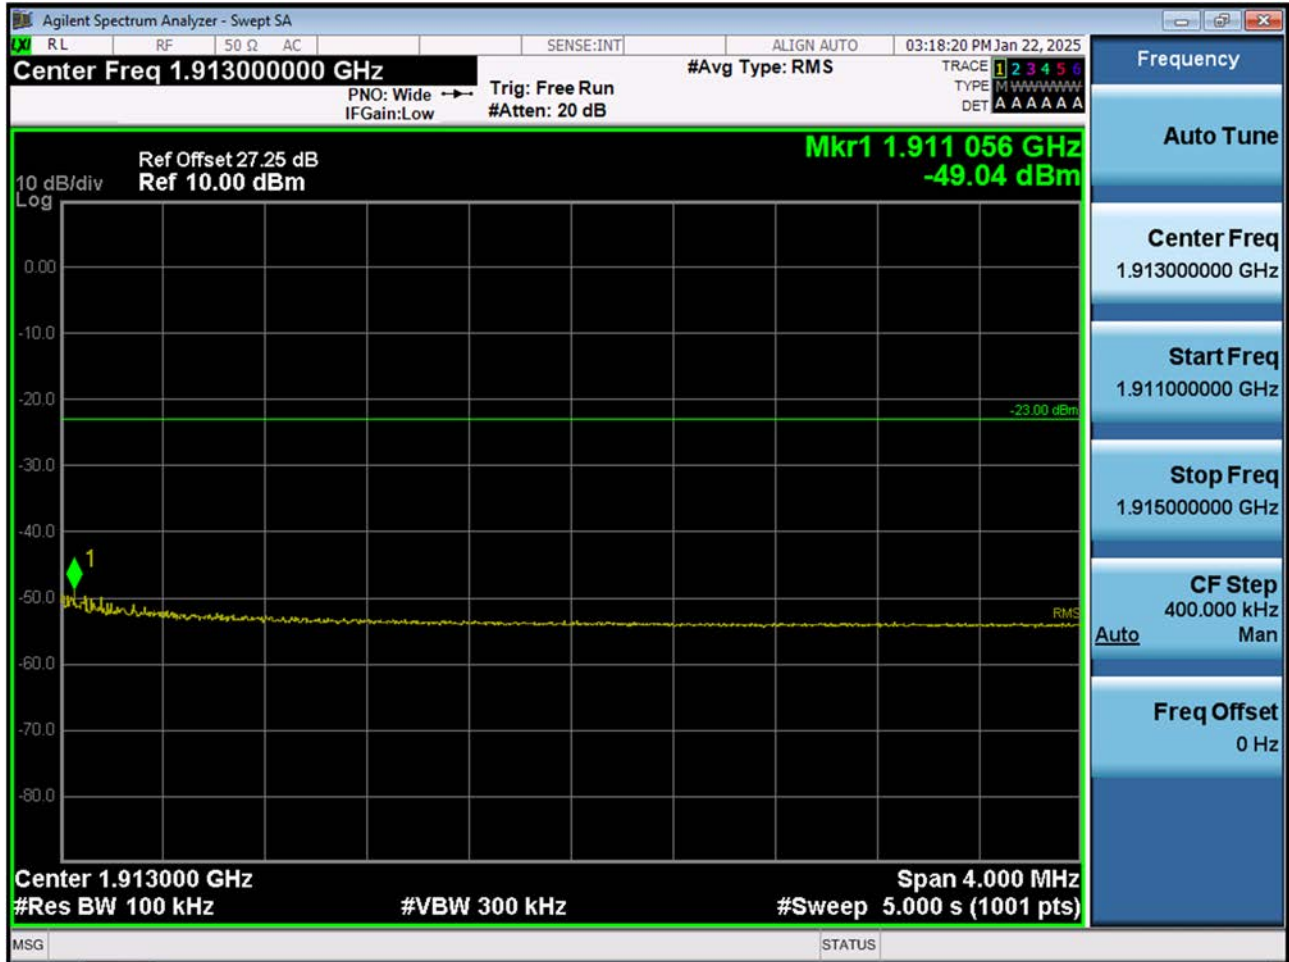


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -49.04 dBm + 10 dB = -39.04 dBm

■ EDGE MODE (512 CH.) Block Edge 1

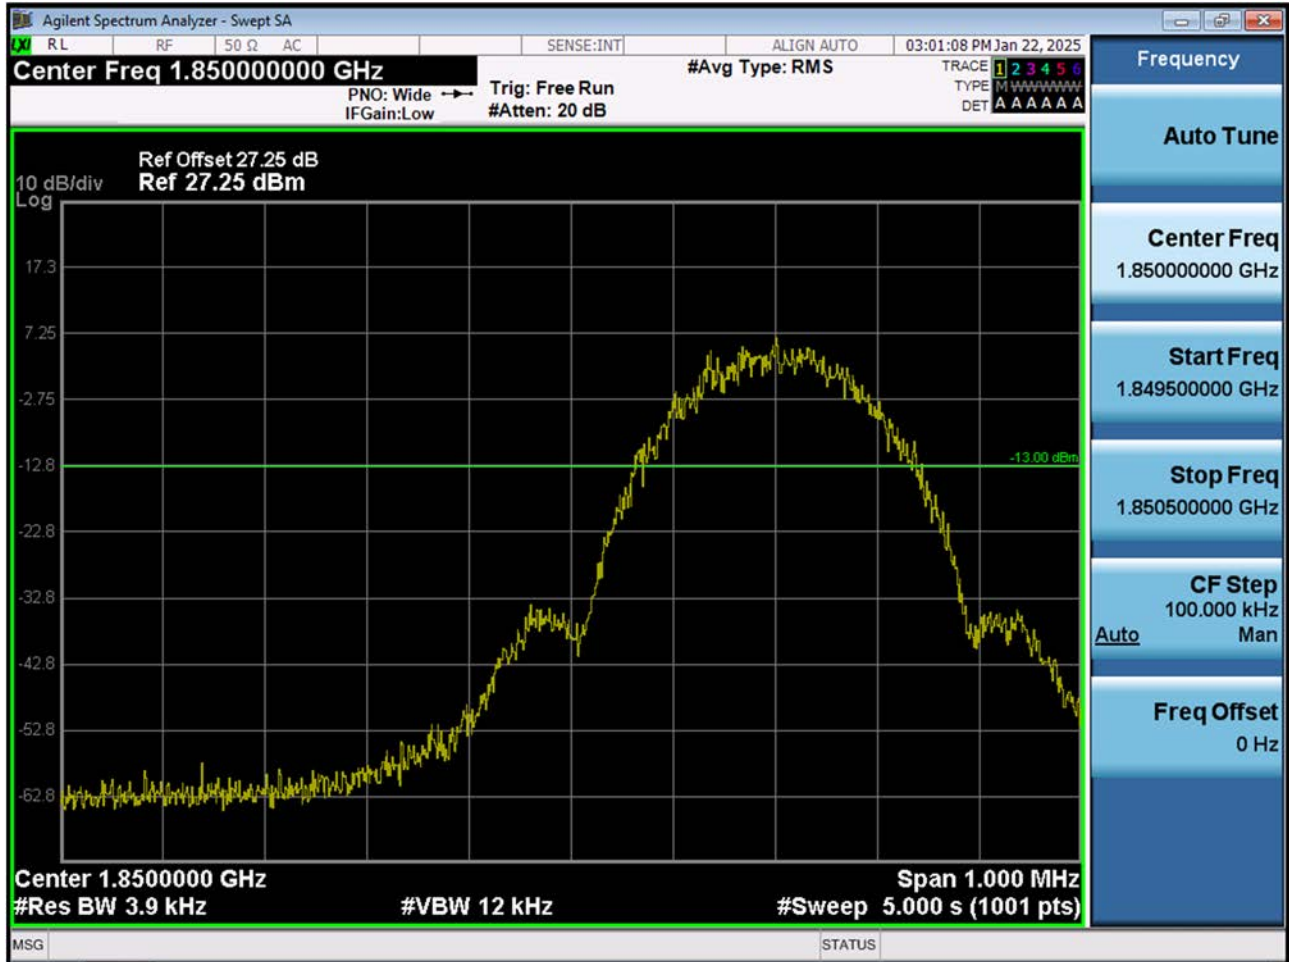

■ EDGE MODE (512 CH.) Block Edge 2

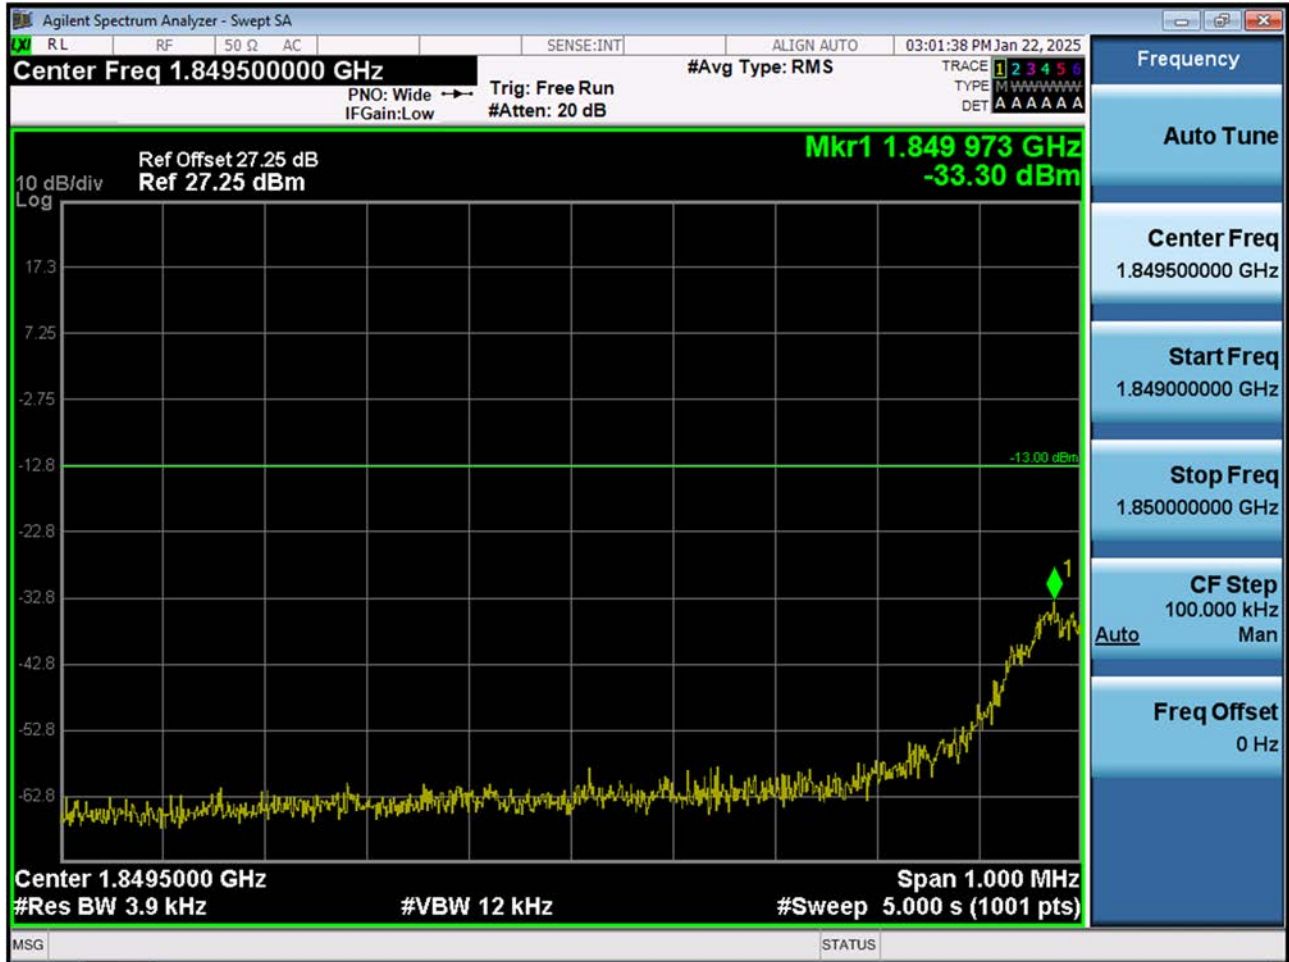




■ EDGE MODE (512 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.


Calculation = Reading Value + 10 x log(1 MHz/100 kHz) dB = -50.80 dBm + 10 dB = -40.80 dBm

■ EDGE MODE (810 CH.) Block Edge 1

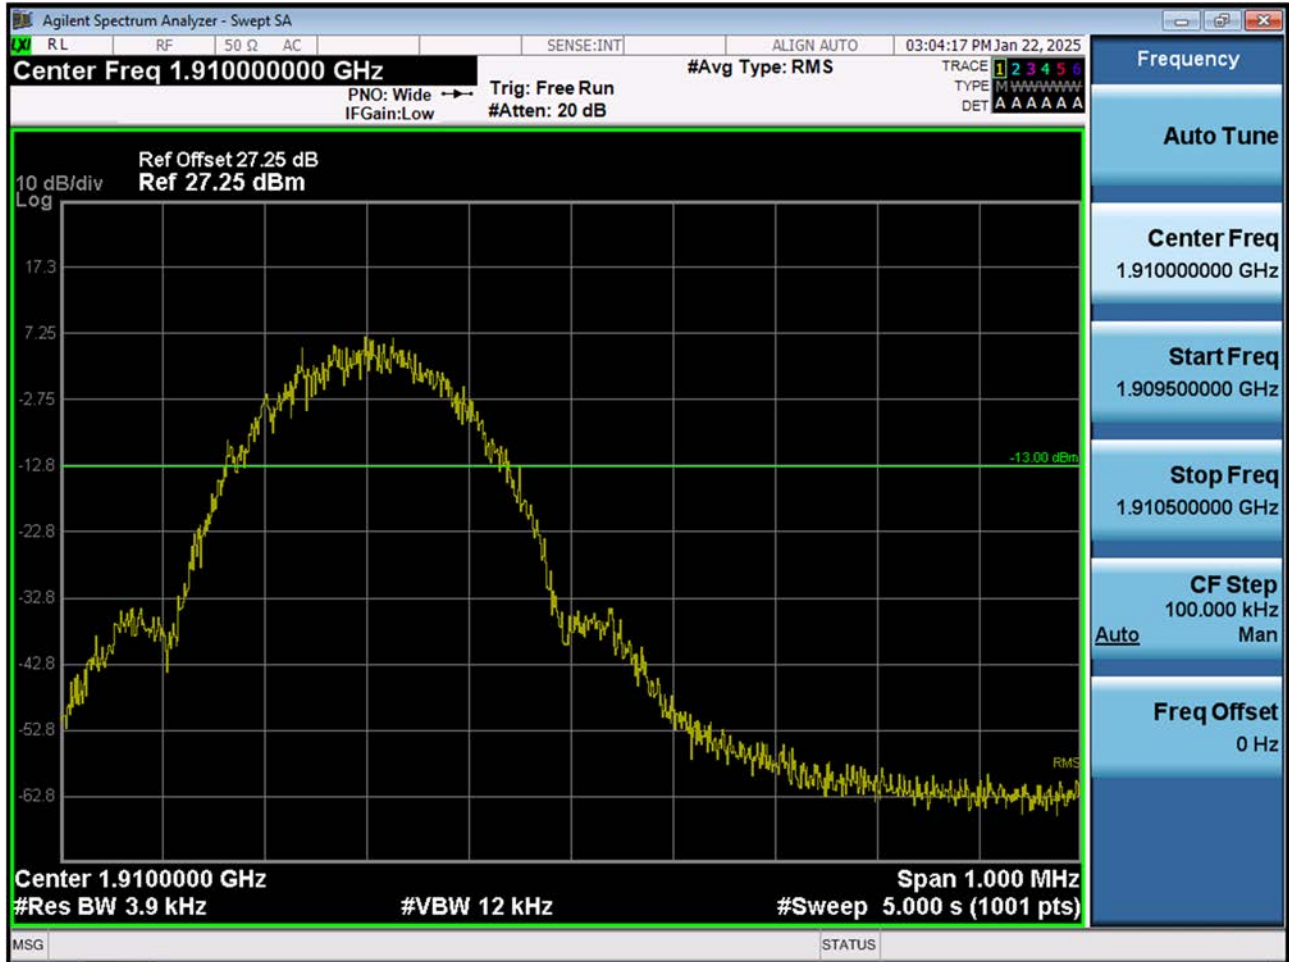




■ EDGE MODE (810 CH.) Block Edge 2

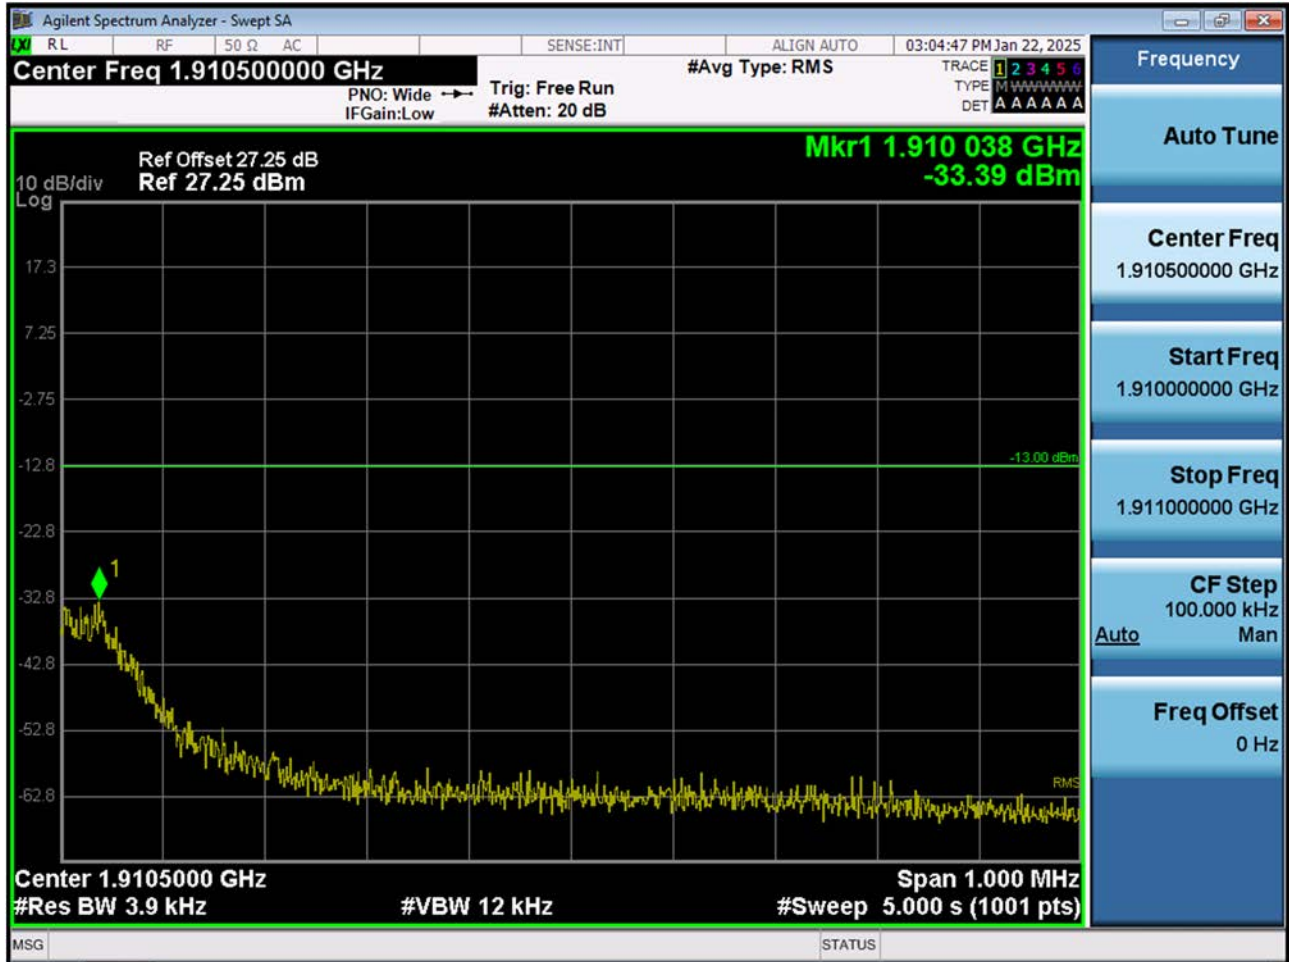

■ EDGE MODE (810 CH.) Block Edge 3

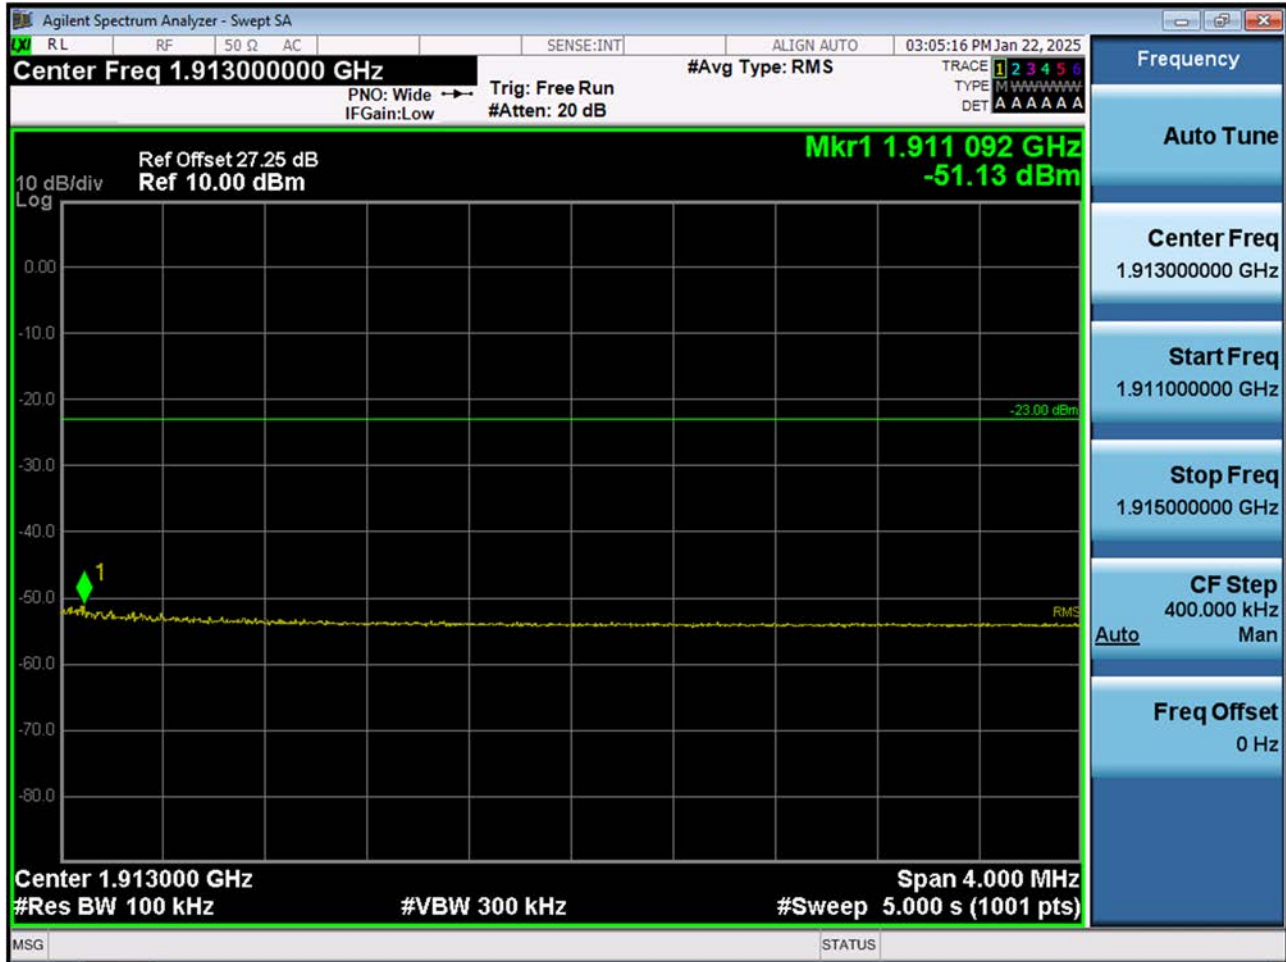

Note : We used a narrower RBW in order to increase accuracy.

$$\text{Calculation} = \text{Reading Value} + 10 \times \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -51.13 \text{ dBm} + 10 \text{ dB} = -41.13 \text{ dBm}$$