

# FCC UNIT 6e REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
May 16, 2023

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Test Site/Location:**  
74, Seoicheon-ro 578 beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-2305-FC050

**FCC ID:** A3LSMX810

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : A3LSMX818U report.**

**Model:** SM-X810

**EUT Type:** Tablet

**Modulation type** OFDM / OFDMA

**FCC Classification:** 15E 6 GHz Low Power Dual Client

**FCC Rule Part(s):** Part 15.407

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

## REVIEWED BY



---

Report prepared by : Sang Hoon Lee  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC050	May 16, 2023	- First Approval Report

# Table of Contents

<b>REVIEWED BY .....</b>	<b>2</b>
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
EUT DESCRIPTION .....	5
ANTENNA CONFIGURATIONS .....	6
<b>2. MAXIMUM OUTPUT POWER.....</b>	<b>8</b>
<b>3. TEST METHODOLOGY .....</b>	<b>1 2</b>
EUT CONFIGURATION .....	1 2
EUT EXERCISE .....	1 2
GENERAL TEST PROCEDURES .....	1 2
DESCRIPTION OF TEST MODES .....	1 2
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>1 3</b>
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>1 3</b>
5.1 FACILITIES .....	1 3
5.2 EQUIPMENT .....	1 3
<b>6. ANTENNA REQUIREMENTS .....</b>	<b>1 3</b>
<b>7. MEASUREMENT UNCERTAINTY .....</b>	<b>1 4</b>
<b>8. DESCRIPTION OF TESTS.....</b>	<b>1 5</b>
<b>9. SUMMARY OF TEST RESULTS .....</b>	<b>3 7</b>
<b>10. TEST RESULT .....</b>	<b>3 8</b>
<b>10.1 DUTY CYCLE.....</b>	<b>3 8</b>
<b>10.2 26 dB BANDWIDTH&amp; 99% BANDWIDTH .....</b>	<b>3 9</b>
10.2.1 26 dB BANDWIDTH(Indoor client) .....	3 9
10.2.2 26 dB BANDWIDTH(Standard client).....	6 7
<b>10.3 OUTPUT POWER MEASUREMENT.....</b>	<b>8 7</b>
10.3.1 E.I.R.P Output Power(Indoor client) .....	8 7
10.3.2 E.I.R.P Output Power(Standard client).....	1 3 0
<b>10.4 POWER SPECTRAL DENSITY(Indoor client).....</b>	<b>1 5 6</b>
10.4.1 Ant 1 .....	1 5 6
10.4.2 Ant 2 .....	1 7 0
10.4.3 SUM (MIMO) .....	1 8 4
<b>10.5 POWER SPECTRAL DENSITY(Standard client) .....</b>	<b>1 9 8</b>
10.5.1 Ant 1 .....	1 9 8
10.5.2 Ant 2 .....	2 0 6
10.5.3 SUM (MIMO) .....	2 1 4
<b>10.6 In-Band Emission .....</b>	<b>2 2 4</b>
<b>10.7 Contention Based Protocol .....</b>	<b>2 2 5</b>
<b>10.8 RADIATED SPURIOUS EMISSIONS (9 kHz – 1 GHz).....</b>	<b>2 2 9</b>
<b>10.9 RADIATED SPURIOUS EMISSIONS (Above 1 GHz) .....</b>	<b>2 3 0</b>
<b>10.10 RADIATED RESTRICTED BAND EDGE .....</b>	<b>2 5 2</b>
<b>10.11 POWERLINE CONDUCTED EMISSIONS .....</b>	<b>2 7 8</b>
<b>11. LIST OF TEST EQUIPMENT .....</b>	<b>2 8 0</b>
<b>12. ANNEX A_ TEST SETUP PHOTO .....</b>	<b>2 8 2</b>

## 1. GENERAL INFORMATION

### EUT DESCRIPTION

<b>Model</b>	SM-X810	
<b>Additional Model</b>	-	
<b>EUT Type</b>	Tablet	
<b>Power Supply</b>	DC 3.88 V	
<b>Modulation Type</b>	OFDM/OFDMA	
<b>Frequency Range (MHz)</b>	<b>Indoor Client</b>	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345
	U-NII-6	20 MHz BW : 6435 - 6515 40 MHz BW : 6445 - 6525 80 MHz BW : 6465 160 MHz BW : 6505
	U-NII-7	20 MHz BW : 6535 - 6875 40 MHz BW : 6565 - 6845 80 MHz BW : 6545 – 6865 160 MHz BW : 6665 - 6825
	U-NII-8	20 MHz BW : 6895 - 7115 40 MHz BW : 6885 - 7085 80 MHz BW : 6945 - 7025 160 MHz BW : 6985
	<b>Standard Client</b>	
	U-NII-5	20 MHz BW : 5935 - 6415 40 MHz BW : 5965 - 6405 80 MHz BW : 5985 - 6385 160 MHz BW : 6025 - 6345
	U-NII-7	20 MHz BW : 6535 – 6855 40 MHz BW : 6565 - 6845 80 MHz BW : 6625 – 6785 160 MHz BW : 6665
<b>Straddle channel</b>	Supported	
<b>Date(s) of Tests</b>	March 13, 2023 ~ May 09, 2023	
<b>Serial number</b>	Radiated: R32W2003HYN Conducted: R32W2003J8B Conducted(CBP test Only) : R32W2003HTL	

**ANTENNA CONFIGURATIONS**

Configurations	SISO		MIMO	
	Ant.1	Ant.2	CDD	SDM
802.11a	X	X	O	X
802.11ax (HE20/40/80/160)	X	X	O	O

**Note:**

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6 GHz bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz	2.4 GHz	5 GHz	5 GHz	6 GHz	6 GHz	Bluetooth	Bluetooth	Test Case
	WiFi	WiFi	WiFi	WiFi	WiFi	WiFi	Ant.1	Ant.2	
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			Scenario 1
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario 2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario 3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

### 3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

Directional gain =

$$\bullet \quad \text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ss}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Band	Ant Gain (dBi)		N <sub>ANT</sub> / N <sub>ss</sub>	Directional Gain (dBi)
UNII 5	ANT1	-5.80	2 / 2	-3.46
	ANT2	-7.20		
UNII 6	ANT1	-6.80	2 / 2	-3.54
	ANT2	-6.30		
UNII 7	ANT1	-7.40	2 / 2	-4.39
	ANT2	-7.40		
UNII 8	ANT1	-8.50	2 / 2	-5.18
	ANT2	-7.90		

#### Note

According to Ansi C63.10-2013 section 14.4.3, the directional gain is calculated using the formula, where GN is the gain of the nth antenna and NANT is the total number of antennas used.

$$\text{Directional Gain} = 10 \cdot \log(((10^{(\text{ANT1 Gain}/20)} + 10^{(\text{ANT2 Gain}/20)})^2)/2) \text{ dBi}$$

#### Sample Calculation (Conducted Power, MIMO):

Ex) Ant 1 : 11.58 dBm Ant 2 : 12.08 dBm

$$\text{Ant1} + \text{Ant 2} = \text{MIMO}$$

$$(11.58 \text{ dBm} + 12.08 \text{ dBm}) = (14.387 \text{ mW} + 16.143 \text{ mW}) = 30.53 \text{ mW} = 14.88 \text{ dBm}$$

#### Sample Calculation (E.I.R.P & E.I.R.P Spectral Density, MIMO):

Ex) ANT1 : 15.35 dBm , ANT2 : 15.12 dBm, Directional Gain : 3 dBi

$$\text{Conducted Power} = (15.35 \text{ dBm} + 15.12 \text{ dBm}) = (34.276 \text{ mW} + 32.508 \text{ mW}) = 66.784 \text{ mW} = 18.25 \text{ dBm}$$

$$\text{E.I.R.P} = 18.25 \text{ dBm} + 3 \text{ dBi} = 21.25 \text{ dBm}$$

## 2. MAXIMUM OUTPUT POWER

The transmitter has a Maximum Conducted Output Power as follows:

Indoor client			
Band	Mode	MIMO	
		(Ant 1 + Ant 2) Output Power (dBm)	(W)
UNII5	802.11ax (HE20)	12.68	0.019
	802.11ax (HE40)	12.41	0.017
	802.11ax (HE80)	12.37	0.017
	802.11ax (HE160)	12.39	0.017
	802.11 a	12.20	0.017
UNII6	802.11ax (HE20)	12.14	0.016
	802.11ax (HE40)	12.02	0.016
	802.11ax (HE80)	12.07	0.016
	802.11ax (HE160)	11.87	0.015
	802.11 a	11.75	0.015
UNII7	802.11ax (HE20)	11.98	0.016
	802.11ax (HE40)	11.93	0.016
	802.11ax (HE80)	12.28	0.017
	802.11ax (HE160)	11.89	0.015
	802.11 a	11.54	0.014
UNII8	802.11ax (HE20)	11.85	0.015
	802.11ax (HE40)	11.62	0.015
	802.11ax (HE80)	11.92	0.016
	802.11ax (HE160)	11.77	0.015
	802.11 a	11.47	0.014

Standard client			
Band	Mode	MIMO	
		(Ant 1 + Ant 2) Output Power	
		(dBm)	(W)
UNII5	802.11ax (HE20)	12.62	0.018
	802.11ax (HE40)	12.44	0.018
	802.11ax (HE80)	12.37	0.017
	802.11ax (HE160)	12.33	0.017
	802.11 a	12.25	0.017
UNII7	802.11ax (HE20)	11.97	0.016
	802.11ax (HE40)	11.98	0.016
	802.11ax (HE80)	12.20	0.017
	802.11ax (HE160)	11.82	0.015
	802.11 a	11.62	0.015

The transmitter has a Maximum EIRP Output Power as follows:

Indoor client			
Band	Mode	MIMO	
		(Ant 1 + Ant 2) EIRP Power	
		(dBm)	(W)
UNII5	802.11ax (HE20)	9.22	0.008
	802.11ax (HE40)	8.95	0.008
	802.11ax (HE80)	8.91	0.008
	802.11ax (HE160)	8.93	0.008
	802.11 a	8.74	0.007
UNII6	802.11ax (HE20)	8.61	0.007
	802.11ax (HE40)	8.48	0.007
	802.11ax (HE80)	8.53	0.007
	802.11ax (HE160)	8.33	0.007
	802.11 a	8.21	0.007
UNII7	802.11ax (HE20)	7.59	0.006
	802.11ax (HE40)	7.54	0.006
	802.11ax (HE80)	7.89	0.006
	802.11ax (HE160)	7.50	0.006
	802.11 a	7.15	0.005
UNII8	802.11ax (HE20)	6.67	0.005
	802.11ax (HE40)	6.44	0.004
	802.11ax (HE80)	6.73	0.005
	802.11ax (HE160)	7.58	0.005
	802.11 a	6.28	0.004

Standard client			
Band	Mode	MIMO	
		(Ant 1 + Ant 2) EIRP Power	
		(dBm)	(W)
UNII5	802.11ax (HE20)	9.16	0.008
	802.11ax (HE40)	8.98	0.008
	802.11ax (HE80)	8.91	0.008
	802.11ax (HE160)	8.86	0.008
	802.11 a	8.79	0.008
UNII7	802.11ax (HE20)	7.58	0.006
	802.11ax (HE40)	7.59	0.006
	802.11ax (HE80)	7.81	0.006
	802.11ax (HE160)	7.43	0.006
	802.11 a	7.23	0.005

### 3. TEST METHODOLOGY

U-NII 6 GHz devices operating in the 5.925-7.125 GHz band was tested using the following measurement procedure.

- [1] FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v01v01(February 04, 2021)
- [2] KDB 789033 D02 General UNII Test Procedures New Rules v02r01(December 14, 2017)
- [3] ANSI C63.10(2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission Value. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

#### 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

#### 5. FACILITIES AND ACCREDITATIONS

##### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

##### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 6. ANTENNA REQUIREMENTS

##### According to FCC 47 CFR §15.203, §15.407:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203, §15.407


## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % Value of confidence.

The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 ( Confidence Value about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 ( Confidence Value about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 ( Confidence Value about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 ( Confidence Value about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 ( Confidence Value about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.52 ( Confidence Value about 95 %, $k=2$ )

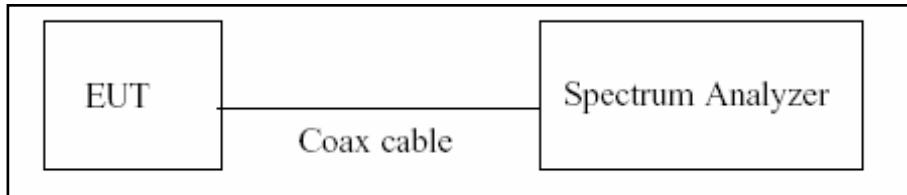**8. DESCRIPTION OF TESTS****8.1. Duty Cycle****Test Configuration****Test Procedure**

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 8.2. 26 dB Bandwidth

### Limit

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

### Test Configuration

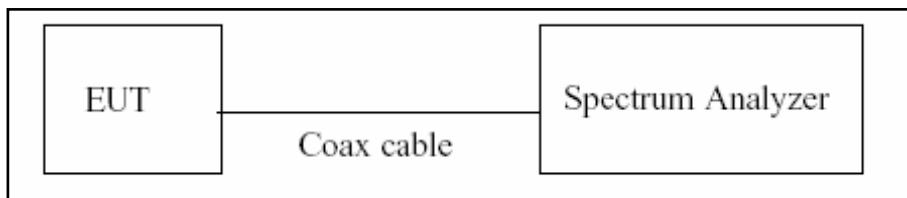

### Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = Max Hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

### Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. The 26 dB bandwidth is used to determine the in-Band Emission limits.

### 8.3. Output Power Measurement

#### Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	24 dBm

[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.


#### Standard Client Limit

Band	Limit (e.i.r.p)
UNII 5,7	30 dBm

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

#### Test Configuration

##### Power Meter

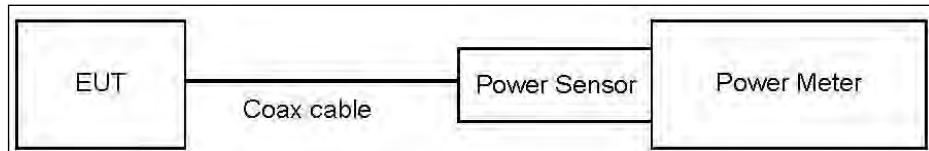

#### Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add  $10 \log (1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

**Sample Calculation**

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Power Meter offset

Attenuator loss(20 dB) + Cable loss + EUT Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 5	21.57
UNII 6	21.57
UNII 7	21.57
UNII 8	21.57

(Actual value of loss for the attenuator and cable combination)

#### 8.4. Power Spectral Density

##### Indoor Client Limit

Band	Limit (e.i.r.p)
UNII 5,6,7,8	-1 dBm/MHz


[47 CFR 15.407(a)(8)] For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

##### Standard Client Limit

Band	Limit (e.i.r.p)
UNII 5,7	17 dBm/MHz

[47 CFR 15.407(a)(7)] For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm e.i.r.p. in any 1-megahertz band

##### Test Configuration

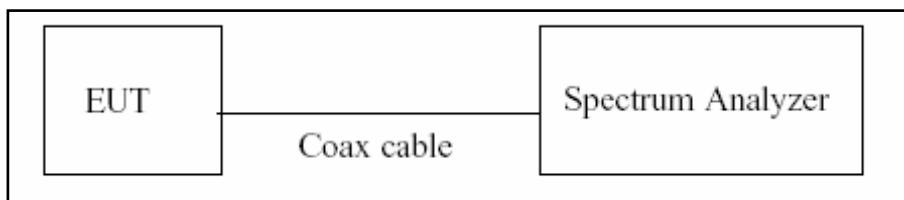

##### Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to "free run".
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.

**Sample Calculation**

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum Measured Values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset

Attenuator loss(20 dB) + Cable loss + EUT Cable loss


3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 5	21.57
UNII 6	21.57
UNII 7	21.57
UNII 8	21.57

(Actual value of loss for the attenuator and cable combination)

## 8.5. In-Band Emission (Emissions Mask)

### Test Configuration

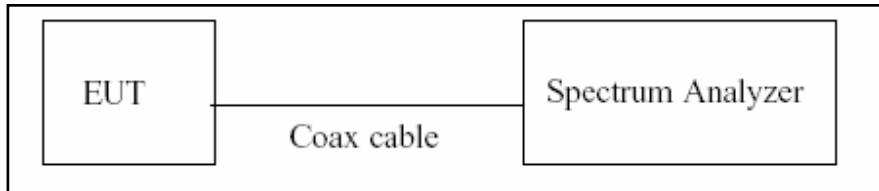


### Test Procedure

We tested according to Procedure J in KDB 987594 D02.

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference Value of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10-2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
  - a. Set the span to encompass the entire 26 dB EBW of the signal.
  - b. Set RBW = same RBW used for 26 dB EBW measurement.
  - c. Set VBW  $\geq 3 \times$  RBW
  - d. Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ .
  - e. Sweep time = auto.
  - f. Detector = RMS (i.e., power averaging)
  - g. Trace average at least 100 traces in power averaging (rms) mode.
  - h. Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.


6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
  - a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
  - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
  - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference Value as necessary so that the crest of the channel touches the top of the emission mask.

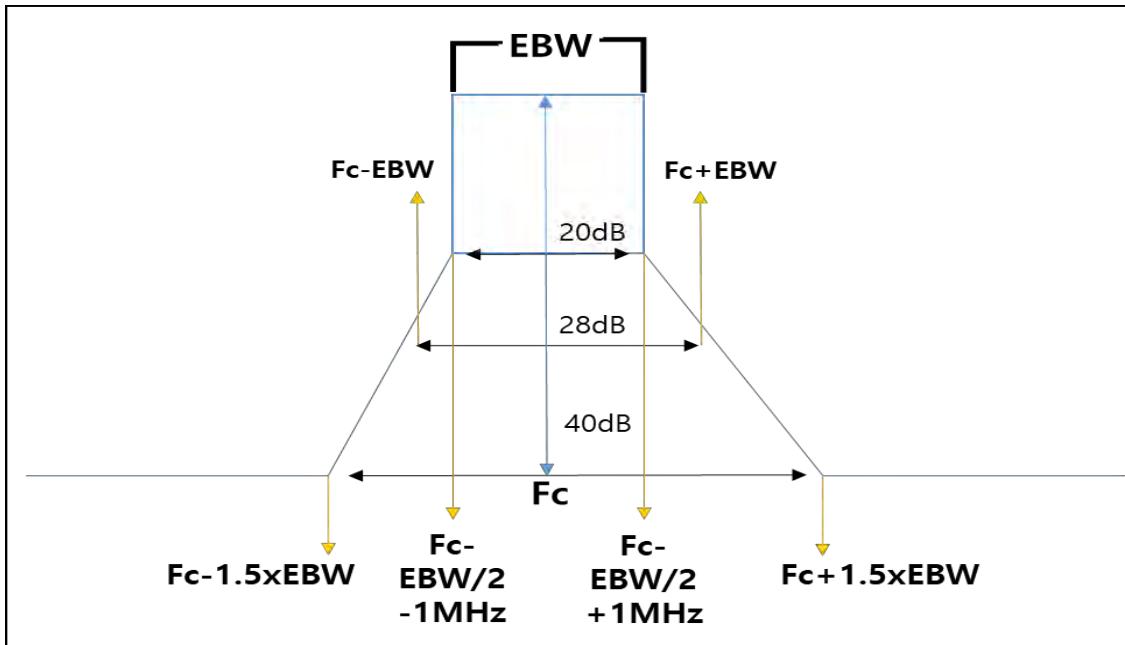

Generic Emission Mask

## 8.6. Contention Based Protocol

### Test Configuration

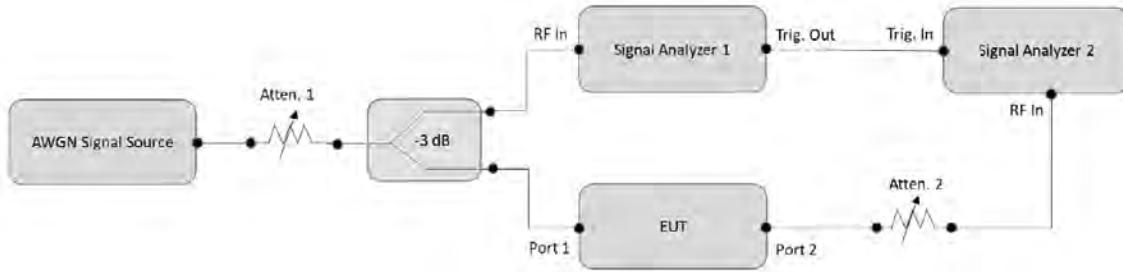

### Test Procedure

We tested according to Procedure I in KDB 987594 D02.

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power Value, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Test Configuration. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low Value (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Test Configuration.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power Value until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power Value (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) Value of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

**Sample Calculation**

Incumbent signal Power(dBm) = Measured Value(dBm)

Modified Detection Limit(dBm) = Detection Limit(-62 dBm) + Antenna Gain(dBi)

## 8.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor


**8.8. Radiated Test****Limit**

1. For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.
2. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


Below 30 MHz

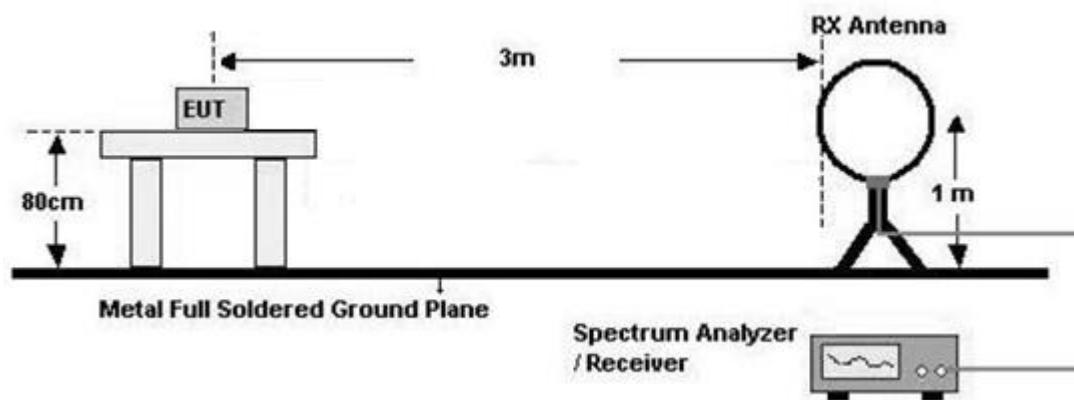

30 MHz - 1 GHz

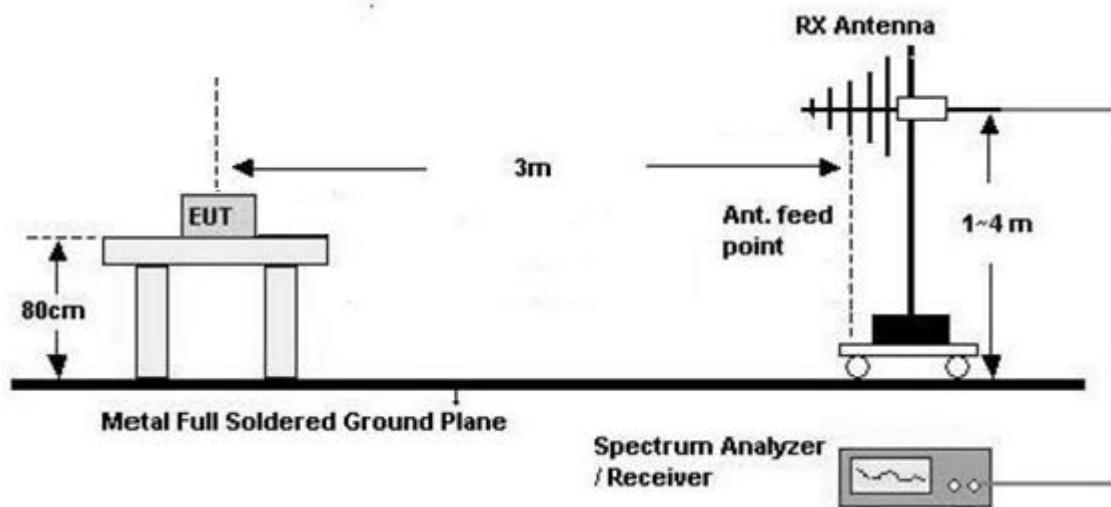

Above 1 GHz

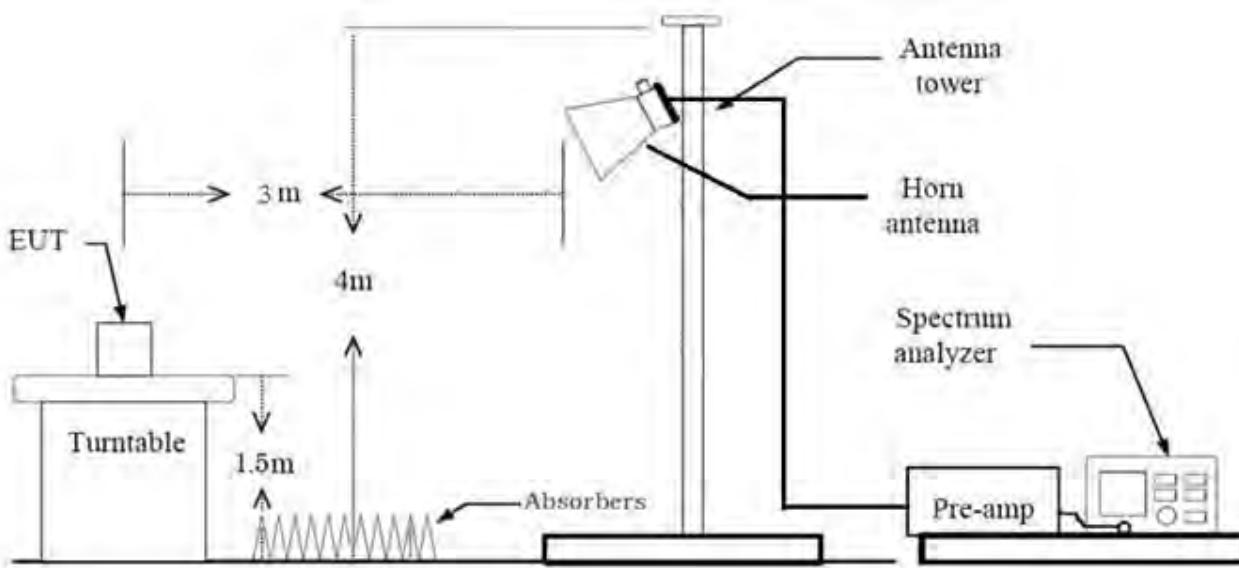

#### Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission Value.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max Hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times \text{RBW}$
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1 GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission Value.
6. Spectrum Setting

## (1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Max Hold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

## (2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission Value.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

## (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = Max Hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where x is the duty cycle.

## (2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- The analyzer is set to linear detector mode.
- Averaging type = power (i.e., RMS)
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

9. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
11. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
12. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
13. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission Value.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep Time = auto
    - Trace mode = Max Hold
    - Allow sweeps to continue until the trace stabilizes.  
Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where x is the duty cycle.
  - (2) Measurement Type (Average, G.6.c in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - The analyzer is set to linear detector mode.
    - Averaging type = power (i.e., RMS)
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.
9. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
10. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator + Distance Factor(D.F)

**8.9. Test RU offset for Tones**

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-
40	26	0~17	0	9	17
	52	37~44	37	41	44
	106	53~56	53	54	56
	242	61~62	61	-	62
	484	65	-	65	-
80	26	0~36	0	18	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-
160	26	0~36	0	18	36
	52	37~52	37	45	52
	106	53~60	53	57	60
	242	61~64	61	62	64
	484	65~66	65	-	66
	996	67	-	67	-

## 8.10. Worst case configuration and mode

### Conducted test

1. All data rate of operation were investigated and the worst case results are reported.
  - HE20 : MCS 0
  - HE40 : MCS 0
  - HE80 : MCS 0
  - HE160 : MCS 0
  - 802.11 a : 6 Mbps

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : Y
  - Radiated Restricted Band Edge : Z
3. All data rate of operation were investigated and the worst case results are reported.  
(Worst case : MCS0)
4. All Antenna of operation were investigated and the worst case results are reported
  - Mode : Ant1+Ant2(SDM), Ant1+Ant2(CDD)
  - Worstcase : Ant1+Ant2(CDD)
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Test	Tone	RU Offset
RSE	Worst case(Highest Power) [802.11a] 6 Mbps (Band NII5,6,7,8) [HE 20] SU (Band NII5,6,7,8) [HE40] SU (Band NII-5) [HE80] SU (Band NII-5) [HE160] SU (Band NII-5)	[802.11a] - [HE 20] - [HE40] - [HE80] - [HE160] -
Band-edge (UNII5,8)	[802.11a] 6 Mbps [HE 20] : 26T, 52T, 106T, 242T, SU  [HE 40] : 26T, 484T, SU [HE 80] : 26T, 996T, SU [HE 160(80L&80U)] : 996T [HE 160] : 996T*2, SU	[802.11a] - [HE20] Low Edge: 0, 37, 53 High Edge: 8, 40, 54 Full tone : 61  [HE40] RU0, RU17, RU65 [HE80] RU0, RU36, RU67 [HE160(80L&80U)] : RU67  [HE 160_996T*2] : RU68

### Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : X

3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test Case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			Scenario 1
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario 2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario 3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

4. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

RSDB Scenario 1	Description	2.4GHz Emission	6 GHz Emission
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	Antenna	Ant All	Ant All
	Channel	1	7
	Data Rate	1 Mbps	MCS 0
	Mode	802.11b	802.11ax(HE80) SU

**Note :** DTS RSDB Data refer to [DTS] Test Report

RSDB Scenario 2	Description	2.4GHz Emission	5 GHz Emission
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	Antenna	Ant All	Ant All
	Channel	1	169
	Data Rate	1 Mbps	MCS 0
	Mode	802.11b	802.11n(HT20)

**Note :** DTS, UNII RSDB Data refer to [DTS], [UNII] Test Report

RSDB Scenario 3	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	Antenna	ANT1	ANT2	Ant All
	Channel	78	1	169
	Data Rate	1 Mbps	1 Mbps	MCS 0
	Mode	GFSK	802.11b	802.11n(HT20)

**Note :** BT, DTS, UNII RSDB Data refer to [BT], [DTS], [UNII] Test Report

**AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories(Earphone, Keyboard etc) + Travel Adapter,

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

## 9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§15.407(a)(10) (for Power Measurement)	Channel Bandwidth(26 dB EBW) < 320 MHz		PASS
Output Power Maximum EIRP	§15.407(a)(4)~(8)	<u>U-NII-5(5925-6425 MHz) &amp; U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) EIRP < 36 dBm Client(Connected to standard-Power Access Point) EIRP < 30 dBm <u>U-NII-5(5925-6425 MHz) &amp; U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) &amp; U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) EIRP < 30 dBm Client (Connected to Low-Power Access Point) EIRP < 24 dBm		PASS
Output Power Maximum EIRP Power Spectral Density	§15.407(a)(4)~(8)	<u>U-NII-5(5925-6425 MHz) &amp; U-NII-7(6525-6875 MHz)</u> Standard-Power Access Point (AFC Controlled) < 33 dBm/MHz (EIRP) Client(Connected to standard-Power Access Point) < 17 dBm/MHz (EIRP) <u>U-NII-5(5925-6425 MHz) &amp; U-NII-6(6425-6525 MHz)</u> <u>U-NII-7(6525-6875 MHz) &amp; U-NII-8(6875-7125 MHz)</u> Low-Power Access Point (indoor only) < 5 dBm/MHz (EIRP) Client (Connected to Low-Power Access Point) < -1 dBm/MHz (EIRP)	Conducted	PASS
AC Conducted Emissions 150 kHz-30 MHz	15.407 (b)(9)	<FCC 15.207 limits		PASS
Contention Based Protocol	§15.407(d)(6)	Detect co-channel energy with 90% or greater certainty.		PASS
In-Band Emissions (Emissions Mask)	§15.407(b)(7)	For transmitters operating within the (5925-7125 MHz) bands Power spectral density (channel bandwidth =26 dB EBW)  a. Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.) b. Suppressed by 28 dB at one channel bandwidth from the channel center. c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.		PASS
Undesirable Emissions	§15.407(b) §15.35(b)	<-27 dBm/MHz EIRP (UNII5, 6, 7, 8)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

## 10. TEST RESULT

### 10.1 DUTY CYCLE

Mode	Tone	Worst Data rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax	-	-	-	-	-	-

**Note:** Test was performed with continuous Tx.(Duty cycle  $\geq$  98% Continuous Signal)

Mode	Worst Data rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6	1.462	1.497	0.976	0.104
	9	0.985	1.021	0.965	0.154
	12	0.745	0.778	0.958	0.188
	18	0.504	0.540	0.934	0.295
	24	0.385	0.418	0.921	0.356
	36	0.263	0.296	0.889	0.512
	48	0.203	0.281	0.721	1.422
	54	0.182	0.281	0.649	1.880

**Note:** Duty cycle  $\geq$  98% Continuous Signal

## 10.2 26 dB BANDWIDTH& 99% BANDWIDTH

### 10.2.1 26 dB BANDWIDTH(Indoor client)

#### 10.2.1.1 Ant1

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE20] 26T	UNII5	5935	2	20.35	18.88	20.56	18.60	17.30	18.70
		6175	45	20.48	18.73	20.17	18.60	17.34	18.68
		6415	93	20.21	18.60	20.71	18.61	17.33	18.72
	UNII6	6435	97	20.55	19.04	20.93	18.60	17.29	18.53
		6475	105	20.80	18.94	20.81	18.42	17.42	18.36
		6515	113	20.78	18.71	20.57	18.66	17.12	18.70
	UNII7	6535	117	20.25	18.93	20.60	18.62	17.27	18.47
		6695	149	20.63	18.53	20.64	18.63	17.11	18.73
		6855	181	20.74	19.01	20.68	18.64	17.26	18.66
	UNII8	6875	185	20.69	18.94	20.79	18.60	17.24	18.69
		6995	209	20.84	18.35	20.65	18.67	17.29	18.47
		7115	233	20.95	18.67	20.97	18.64	17.19	18.68

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE20] 52T	UNII5	5935	2	21.18	19.49	20.59	18.34	17.23	18.33
		6175	45	20.96	19.20	20.75	18.36	17.24	18.38
		6415	93	21.13	19.07	20.62	18.40	17.24	18.35
	UNII6	6435	97	21.19	19.34	20.36	18.30	17.32	18.20
		6475	105	20.96	18.78	20.73	18.43	17.09	18.29
		6515	113	21.09	19.28	20.57	18.37	17.32	18.30
	UNII7	6535	117	21.00	19.26	20.55	18.37	17.26	18.28
		6695	149	20.64	19.10	20.90	18.15	17.31	18.04
		6855	181	20.83	19.51	20.60	18.07	17.26	18.18
	UNII8	6875	185	20.98	19.18	20.71	18.42	17.33	18.31
		6995	209	20.95	19.04	20.60	18.22	17.06	18.26
		7115	233	21.74	19.36	20.56	18.42	17.23	18.35

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE20] 106T	UNII5	5935	2	21.77	-	21.24	18.22	-	18.14
		6175	45	21.99	-	21.28	18.38	-	18.37
		6415	93	21.70	-	21.19	18.35	-	18.40
	UNII6	6435	97	21.79	-	21.45	18.37	-	18.39
		6475	105	21.33	-	21.14	18.36	-	18.28
		6515	113	21.61	-	21.41	18.40	-	18.40
	UNII7	6535	117	21.74	-	21.28	18.29	-	18.16
		6695	149	21.79	-	21.14	18.30	-	18.42
		6855	181	21.75	-	21.25	18.12	-	18.38
	UNII8	6875	185	21.58	-	21.26	18.38	-	18.35
		6995	209	21.54	-	21.14	18.35	-	18.37
		7115	233	21.70	-	21.09	18.39	-	18.41

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE20] 242T	UNII5	5935	2	-	22.54	-	-	19.10	-
		6175	45	-	22.36	-	-	19.08	-
		6415	93	-	22.37	-	-	19.10	-
	UNII6	6435	97	-	22.49	-	-	19.08	-
		6475	105	-	22.28	-	-	19.11	-
		6515	113	-	22.39	-	-	19.10	-
	UNII7	6535	117	-	22.48	-	-	19.09	-
		6695	149	-	22.55	-	-	19.10	-
		6855	181	-	22.53	-	-	19.09	-
	UNII8	6875	185	-	22.50	-	-	19.11	-
		6995	209	-	22.58	-	-	19.08	-
		7115	233	-	22.52	-	-	19.09	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE20]	UNII5	5935	2	-	21.10	-	-	18.93	-
		6175	45	-	21.18	-	-	18.93	-
		6415	93	-	20.85	-	-	18.93	-
	UNII6	6435	97	-	21.05	-	-	18.93	-
		6475	105	-	21.05	-	-	18.91	-
		6515	113	-	20.92	-	-	18.93	-
	SU	6535	117	-	20.79	-	-	18.92	-
		6695	149	-	21.12	-	-	18.92	-
		6855	181	-	20.85	-	-	18.92	-
	UNII8	6875	185	-	21.06	-	-	18.95	-
		6995	209	-	20.89	-	-	18.91	-
		7115	233	-	21.09	-	-	18.94	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE40]	UNII5	5965	3	40.51	38.24	40.53	38.16	36.43	38.38
		6165	43	40.65	38.07	40.83	38.41	36.45	38.41
		6405	91	40.52	38.15	40.76	38.13	36.23	38.44
	UNII6	6445	99	40.31	38.14	40.63	38.17	36.40	38.25
		6485	107	40.58	38.14	40.33	38.24	36.55	38.21
		6525	115	40.55	38.16	41.03	38.25	36.39	38.31
	26T	6565	123	40.65	38.19	40.40	38.23	36.15	38.21
		6685	147	40.50	37.97	40.33	38.30	36.19	38.38
		6845	179	40.83	38.26	39.93	38.18	36.43	38.18
	UNII8	6885	187	40.56	37.87	40.41	38.14	36.40	38.37
		7005	211	40.19	38.23	40.22	38.19	36.35	38.17
		7085	227	40.25	38.15	40.59	38.03	36.32	38.44

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE40] 52T	UNII5	5965	3	41.19	38.34	41.28	37.68	36.49	38.01
		6165	43	40.65	38.39	40.80	37.69	36.42	37.85
		6405	91	41.26	38.37	41.26	37.78	36.33	37.94
	UNII6	6445	99	40.60	38.35	40.77	37.82	36.28	37.78
		6485	107	41.20	38.27	40.98	37.75	36.50	37.81
		6525	115	40.82	38.19	41.17	37.87	36.34	37.84
	UNII7	6565	123	40.45	37.61	41.04	37.77	35.88	37.97
		6685	147	40.81	38.30	41.06	37.75	36.51	37.98
		6845	179	40.94	38.49	41.53	37.78	36.45	37.95
	UNII8	6885	187	41.24	38.31	40.74	37.73	36.46	37.58
		7005	211	41.00	38.25	41.34	37.73	36.32	37.90
		7085	227	41.09	38.20	40.58	37.95	36.23	37.87

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE40] 106T	UNII5	5965	3	41.68	38.97	41.78	37.51	36.61	37.53
		6165	43	41.60	38.87	42.18	37.44	36.51	37.34
		6405	91	41.50	39.48	41.56	37.36	36.58	37.66
	UNII6	6445	99	41.25	39.29	41.70	37.43	36.09	37.48
		6485	107	41.58	39.39	41.70	37.56	36.56	37.61
		6525	115	41.28	39.13	41.90	37.50	36.35	37.79
	UNII7	6565	123	41.51	39.15	41.49	37.40	36.36	37.62
		6685	147	41.09	39.21	41.74	37.48	36.56	37.35
		6845	179	41.25	39.26	41.17	37.48	36.29	37.38
	UNII8	6885	187	41.30	39.54	42.09	37.51	36.53	37.69
		7005	211	41.49	39.44	42.19	37.43	36.35	37.59
		7085	227	41.57	39.11	41.94	37.21	36.30	37.72

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
[HE40] 242T	UNII5	5965	3	42.29	-	41.13	37.37	-	37.19
		6165	43	42.68	-	42.29	37.51	-	37.25
		6405	91	42.14	-	41.58	37.37	-	37.22
	UNII6	6445	99	42.07	-	41.75	37.47	-	37.50
		6485	107	41.69	-	42.02	37.35	-	37.36
		6525	115	42.21	-	41.40	37.40	-	37.07
	UNII7	6565	123	42.29	-	42.18	37.40	-	37.49
		6685	147	42.14	-	41.94	37.28	-	37.50
		6845	179	42.42	-	42.64	37.37	-	37.38
	UNII8	6885	187	41.96	-	41.73	37.34	-	37.42
		7005	211	42.17	-	42.11	37.30	-	37.35
		7085	227	42.01	-	41.94	37.36	-	37.51

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
[HE40] 484T	UNII5	5965	3	-	44.96	-	-	38.06	-
		6165	43	-	45.08	-	-	38.11	-
		6405	91	-	44.82	-	-	38.05	-
	UNII6	6445	99	-	44.73	-	-	38.08	-
		6485	107	-	45.02	-	-	38.00	-
		6525	115	-	44.96	-	-	38.04	-
	UNII7	6565	123	-	44.51	-	-	38.05	-
		6685	147	-	44.57	-	-	38.00	-
		6845	179	-	44.68	-	-	38.05	-
	UNII8	6885	187	-	44.50	-	-	38.06	-
		7005	211	-	44.87	-	-	38.04	-
		7085	227	-	45.04	-	-	38.06	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40]	UNII5	5965	3	-	40.73	-	-	37.77	-
		6165	43	-	40.84	-	-	37.76	-
		6405	91	-	40.88	-	-	37.76	-
	UNII6	6445	99	-	40.75	-	-	37.75	-
		6485	107	-	40.57	-	-	37.77	-
		6525	115	-	40.88	-	-	37.74	-
	SU	6565	123	-	40.66	-	-	37.78	-
		6685	147	-	40.79	-	-	37.75	-
		6845	179	-	40.80	-	-	37.76	-
	UNII8	6885	187	-	40.84	-	-	37.76	-
		7005	211	-	40.63	-	-	37.73	-
		7085	227	-	40.69	-	-	37.76	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 26T	UNII5	5985	7	81.99	78.37	80.90	78.80	75.17	78.56
		6145	39	81.48	78.38	81.94	78.98	75.59	78.84
		6385	87	82.70	78.46	81.62	79.28	75.38	78.98
	UNII6	6465	103	81.68	78.66	81.08	78.69	75.58	78.94
		6545	119	81.63	78.30	82.18	78.74	75.51	79.56
		6625	135	81.98	78.36	81.70	79.27	75.64	79.04
	UNII7	6705	151	82.11	78.50	81.16	78.96	75.48	78.60
		6785	167	81.79	78.55	81.30	79.12	75.54	78.62
		6865	183	81.74	77.62	80.86	78.81	74.99	78.54
	UNII8	6945	199	82.03	78.28	81.05	78.79	75.52	78.75
		7025	215	81.28	78.16	81.90	78.76	75.29	79.10

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80] 52T	UNII5	5985	7	83.44	79.06	82.54	78.77	75.27	78.11
		6145	39	82.99	78.71	82.72	78.28	74.88	78.21
		6385	87	82.67	78.15	83.05	78.21	74.62	78.07
	UNII6	6465	103	83.84	78.64	82.95	78.58	74.76	78.21
		6545	119	83.05	78.78	83.32	78.23	74.89	78.46
	UNII7	6625	135	82.78	78.60	83.02	78.22	75.10	78.58
		6705	151	83.11	78.96	83.50	78.35	75.26	78.51
		6785	167	83.35	78.88	83.22	78.44	75.07	78.65
	UNII8	6865	183	82.53	78.59	83.47	78.32	74.89	78.79
		6945	199	82.75	78.72	82.85	78.24	75.08	78.00
		7025	215	83.69	78.52	82.35	78.04	75.07	78.63

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80] 106T	UNII5	5985	7	83.14	80.46	82.33	77.43	75.11	77.27
		6145	39	84.32	79.91	83.18	77.82	75.41	77.32
		6385	87	83.61	79.79	83.13	77.66	75.05	77.30
	UNII6	6465	103	84.46	79.87	83.30	77.57	75.25	77.59
		6545	119	84.10	79.37	83.50	77.89	75.22	77.63
	UNII7	6625	135	84.41	79.38	82.08	77.81	75.34	77.64
		6705	151	84.00	79.51	82.56	77.57	75.24	77.33
		6785	167	84.22	79.31	83.28	77.35	75.06	77.63
	UNII8	6865	183	84.32	79.26	83.70	77.55	74.90	77.63
		6945	199	84.21	79.41	83.16	77.58	75.29	77.52
		7025	215	84.09	79.10	82.73	77.74	75.24	77.53

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80] 242T	UNII5	5985	7	84.90	80.64	84.10	77.37	75.16	76.86
		6145	39	83.26	79.95	83.27	77.21	75.16	76.99
		6385	87	83.45	80.31	83.47	77.26	75.44	77.11
	UNII6	6465	103	83.91	80.71	83.89	77.28	75.41	77.07
		6545	119	83.99	80.76	83.55	76.98	75.36	77.15
	UNII7	6625	135	83.98	80.54	84.63	77.12	75.55	77.36
		6705	151	84.37	81.22	83.62	77.10	75.43	77.13
		6785	167	84.91	80.72	84.86	77.33	75.27	77.27
	UNII8	6865	183	83.87	80.26	83.90	76.86	75.42	77.31
		6945	199	84.80	80.78	83.44	77.11	75.50	77.24
		7025	215	85.02	80.00	84.12	76.93	75.15	77.20

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80] 484T	UNII5	5985	7	87.77	-	85.03	77.08	-	76.67
		6145	39	86.85	-	85.22	77.24	-	76.59
		6385	87	85.33	-	84.64	76.92	-	76.67
	UNII6	6465	103	87.09	-	85.00	76.97	-	76.72
		6545	119	86.65	-	84.26	77.05	-	76.72
	UNII7	6625	135	86.77		85.48	76.90		76.50
		6705	151	86.73	-	84.89	76.99	-	76.81
		6785	167	87.11		85.34	76.92		76.83
	UNII8	6865	183	86.22	-	84.81	76.87	-	76.77
		6945	199	85.55	-	85.14	77.00	-	76.78
		7025	215	86.45	-	84.86	76.75	-	76.93

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 996T	UNII5	5985	7	-	88.03	-	-	77.75	-
		6145	39	-	89.04	-	-	77.77	-
		6385	87	-	87.97	-	-	77.77	-
	UNII6	6465	103	-	88.87	-	-	77.67	-
		6545	119	-	88.72	-	-	77.68	-
	UNII7	6625	135		88.15			77.68	
		6705	151	-	87.81	-	-	77.67	-
		6785	167		88.01			77.70	
	UNII8	6865	183	-	88.70	-	-	77.70	-
		6945	199	-	88.10	-	-	77.73	-
		7025	215	-	88.00	-	-	77.71	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] SU	UNII5	5985	7	-	82.02	-	-	77.17	-
		6145	39	-	82.29	-	-	77.34	-
		6385	87	-	82.46	-	-	77.35	-
	UNII6	6465	103	-	82.37	-	-	77.23	-
		6545	119	-	82.18	-	-	77.24	-
	UNII7	6625	135		82.03			77.35	
		6705	151	-	82.05	-	-	77.29	-
		6785	167		82.42			77.31	
	UNII8	6865	183	-	82.07	-	-	77.34	-
		6945	199	-	82.19	-	-	77.16	-
		7025	215	-	82.34	-	-	77.18	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80L] 26T	UNII5	6025	15	163.9	158.0	157.5	159.70	152.86	153.62
		6185	47	163.2	157.5	157.0	158.68	153.41	152.98
		6345	79	163.9	157.8	157.2	159.11	153.02	152.92
	UNII6	6505	111	163.2	157.7	156.3	158.88	153.03	151.30
	UNII7	6665	143	161.9	158.3	158.1	158.62	153.73	152.80
	UNII8	6825	175	162.1	158.3	156.4	157.69	153.57	152.59
		6985	207	162.5	157.1	158.0	157.30	152.37	153.83

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80L] 52T	UNII5	6025	15	165.1	158.6	158.1	159.31	153.60	152.52
		6185	47	164.8	157.9	158.2	158.51	152.79	153.26
		6345	79	163.1	157.4	157.8	157.27	151.29	152.24
	UNII6	6505	111	163.1	158.4	158.1	157.35	153.19	152.98
	UNII7	6665	143	164.6	158.7	158.1	157.69	152.55	152.66
	UNII8	6825	175	163.0	158.3	158.5	157.71	152.44	153.13
		6985	207	163.2	158.1	158.7	157.34	152.11	153.38

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80L] 106T	UNII5	6025	15	165.0	157.0	158.9	157.93	151.45	152.85
		6185	47	166.7	160.1	158.3	157.46	153.58	152.57
		6345	79	165.4	159.3	157.6	157.20	152.35	150.79
	UNII6	6505	111	164.2	159.1	159.6	156.63	152.51	152.72
	UNII7	6665	143	165.9	159.8	155.0	157.04	153.09	148.07
	UNII8	6825	175	166.1	158.9	160.1	156.04	152.40	152.91
		6985	207	165.3	159.1	158.4	156.30	152.96	152.71

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80L] 242T	UNII5	6025	15	167.1	159.5	160.3	157.49	152.64	152.63
		6185	47	165.1	159.5	160.0	156.85	153.13	152.93
		6345	79	164.8	159.4	160.2	156.82	151.95	153.33
	UNII6	6505	111	165.1	159.7	159.2	155.90	152.84	152.30
	UNII7	6665	143	164.2	159.9	160.4	156.19	153.04	153.47
	UNII8	6825	175	164.2	159.9	159.7	154.44	152.03	152.57
		6985	207	164.9	159.7	159.3	155.00	152.29	152.11

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80L] 484T	UNII5	6025	15	168.6	-	162.3	157.02	-	150.17
		6185	47	167.1	-	162.0	156.11	-	152.57
		6345	79	168.6	-	160.9	155.79	-	152.00
	UNII6	6505	111	168.1	-	162.9	155.76	-	153.25
	UNII7	6665	143	168.2	-	162.1	155.91	-	152.96
	UNII8	6825	175	165.1	-	160.1	153.40	-	151.75
		6985	207	167.6	-	159.8	154.95	-	151.95

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80L] 996T	UNII5	6025	15	-	169.1	-	-	155.23	-
		6185	47	-	168.9	-	-	156.33	-
		6345	79	-	168.8	-	-	155.47	-
	UNII6	6505	111	-	166.8	-	-	156.06	-
	UNII7	6665	143	-	168.0	-	-	155.58	-
	UNII8	6825	175	-	168.6	-	-	155.84	-
		6985	207	-	168.0	-	-	155.21	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80U] 26T	UNII5	6025	15	156.8	158.0	162.1	152.78	153.76	159.25
		6185	47	158.0	158.2	163.7	154.28	153.34	159.27
		6345	79	158.0	158.4	162.5	153.38	153.49	159.14
	UNII6	6505	111	158.5	158.2	164.1	154.46	153.93	159.80
	UNII7	6665	143	155.4	158.3	163.5	151.25	153.83	159.78
	UNII8	6825	175	157.6	158.3	161.3	153.19	153.82	158.84
		6985	207	157.7	158.1	163.0	153.37	153.94	159.81

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80U] 52T	UNII5	6025	15	158.6	158.8	164.3	153.22	152.56	157.05
		6185	47	158.9	158.3	163.6	152.27	152.22	157.89
		6345	79	157.5	158.6	164.6	152.64	153.20	157.95
	UNII6	6505	111	158.3	158.6	164.6	152.77	153.29	159.08
	UNII7	6665	143	158.2	158.5	164.2	152.35	153.19	158.52
	UNII8	6825	175	159.1	158.4	164.2	152.72	153.48	159.15
		6985	207	158.7	158.6	164.9	153.53	153.34	158.95

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80U] 106T	UNII5	6025	15	159.4	158.9	164.4	153.39	152.67	156.39
		6185	47	158.6	159.3	164.1	152.33	152.85	156.87
		6345	79	158.4	160.0	164.6	151.87	153.47	157.15
	UNII6	6505	111	159.1	159.3	163.6	152.54	153.41	157.96
	UNII7	6665	143	159.7	159.7	163.7	152.89	153.29	157.65
	UNII8	6825	175	159.4	158.9	163.8	152.73	153.34	157.89
		6985	207	154.7	159.8	164.8	149.06	153.70	157.89

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80U] 242T	UNII5	6025	15	159.8	160.2	163.6	152.83	152.30	155.60
		6185	47	160.2	160.2	163.8	153.38	153.17	155.95
		6345	79	159.6	160.4	164.6	152.74	153.55	156.37
	UNII6	6505	111	160.3	160.3	165.1	152.98	153.64	156.82
	UNII7	6665	143	160.1	159.4	164.6	152.89	152.70	156.51
	UNII8	6825	175	160.1	160.4	164.1	153.38	154.08	156.23
		6985	207	160.1	160.2	164.5	153.74	152.85	157.16

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80U] 484T	UNII5	6025	15	161.7	-	166.6	151.96	-	155.63
		6185	47	161.4	-	166.1	153.44	-	155.54
		6345	79	161.8	-	166.2	152.96	-	155.91
	UNII6	6505	111	160.9	-	164.4	152.65	-	155.62
	UNII7	6665	143	162.5	-	166.5	152.89	-	156.17
	UNII8	6825	175	161.8	-	166.3	152.83	-	156.56
		6985	207	161.2	-	166.0	152.81	-	156.66

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
[HE80U] 996T	UNII5	6025	15	-	166.3	-	-	155.35	-
		6185	47	-	165.2	-	-	155.11	-
		6345	79	-	164.8	-	-	154.92	-
	UNII6	6505	111	-	165.4	-	-	156.01	-
	UNII7	6665	143	-	166.0	-	-	156.00	-
	UNII8	6825	175	-	165.7	-	-	156.04	-
		6985	207	-	165.9	-	-	156.28	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
[HE160] 996*2T	UNII5	6025	15	-	165.1	-	-	156.08	-
		6185	47	-	165.5	-	-	156.07	-
		6345	79	-	165.6	-	-	156.29	-
	UNII6	6505	111	-	166.0	-	-	156.33	-
	UNII7	6665	143	-	166.3	-	-	156.32	-
	UNII8	6825	175	-	165.4	-	-	156.17	-
		6985	207	-	164.5	-	-	156.17	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
[HE160] SU	UNII5	6025	15	-	164.7	-	-	156.62	-
		6185	47	-	164.4	-	-	156.07	-
		6345	79	-	165.4	-	-	156.32	-
	UNII6	6505	111	-	164.8	-	-	156.22	-
	UNII7	6665	143	-	165.7	-	-	156.09	-
	UNII8	6825	175	-	164.3	-	-	156.21	-
		6985	207	-	164.7	-	-	156.16	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
802.11a	UNII5	5935	2	-	19.08	-	-	16.36	-
		6175	45	-	19.11	-	-	16.36	-
		6415	93	-	19.20	-	-	16.37	-
	UNII6	6435	97	-	19.04	-	-	16.37	-
		6475	105	-	19.04	-	-	16.37	-
		6515	113	-	18.99	-	-	16.37	-
	UNII7	6535	117	-	19.14	-	-	16.37	-
		6695	149	-	19.05	-	-	16.36	-
		6855	181	-	19.00	-	-	16.37	-
	UNII8	6875	185	-	19.03	-	-	16.37	-
		6995	209	-	19.15	-	-	16.37	-
		7115	233	-	19.05	-	-	16.37	-

## 10.2.1.2 Ant2

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 26T	UNII5	5935	2	20.36	18.49	20.82	18.49	17.35	18.59
		6175	45	20.78	18.54	20.71	18.62	17.33	18.73
		6415	93	20.57	18.74	20.88	18.59	17.36	18.70
	UNII6	6435	97	20.56	18.97	20.86	18.57	17.38	18.65
		6475	105	20.43	18.68	20.79	18.61	17.25	18.67
		6515	113	20.36	18.69	20.71	18.58	17.24	18.50
	UNII7	6535	117	20.64	18.87	20.60	18.39	17.20	18.70
		6695	149	20.62	18.65	20.64	18.51	17.33	18.66
		6855	181	20.63	19.01	20.42	18.63	17.21	18.66
	UNII8	6875	185	20.56	18.27	20.94	18.61	17.13	18.78
		6995	209	20.61	18.90	20.72	18.59	17.30	18.66
		7115	233	20.75	18.76	20.61	18.58	17.35	18.66

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 52T	UNII5	5935	2	21.06	19.35	20.61	18.36	17.01	18.36
		6175	45	21.03	19.20	20.56	18.40	17.32	18.31
		6415	93	20.98	19.29	20.57	18.26	17.27	18.30
	UNII6	6435	97	20.84	19.42	20.63	18.37	17.33	18.30
		6475	105	21.41	18.78	20.45	18.36	17.26	18.27
		6515	113	20.96	19.45	20.71	18.35	17.32	18.32
	UNII7	6535	117	20.99	19.26	20.83	17.97	17.05	18.21
		6695	149	21.01	19.14	20.64	18.24	17.27	18.24
		6855	181	21.23	19.37	20.67	18.14	17.23	18.37
	UNII8	6875	185	21.17	19.30	20.52	18.45	17.25	18.35
		6995	209	21.06	19.07	20.82	18.24	17.22	18.28
		7115	233	21.24	19.36	20.67	18.37	17.35	18.35

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 106T	UNII5	5935	2	21.66	-	21.15	18.29	-	18.42
		6175	45	21.73	-	21.17	18.30	-	18.40
		6415	93	21.81	-	21.11	18.26	-	18.41
	UNII6	6435	97	21.74	-	21.36	18.42	-	18.25
		6475	105	21.65	-	21.26	18.39	-	18.36
		6515	113	21.72	-	21.16	18.12	-	18.31
	UNII7	6535	117	21.52	-	21.17	18.33	-	18.40
		6695	149	21.95	-	21.14	18.37	-	18.39
		6855	181	21.46	-	21.17	18.25	-	18.36
	UNII8	6875	185	21.49	-	21.21	18.33	-	18.41
		6995	209	21.85	-	21.20	18.33	-	18.38
		7115	233	21.57	-	21.08	18.29	-	18.05

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 242T	UNII5	5935	2	-	22.72	-	-	19.16	-
		6175	45	-	22.56	-	-	19.16	-
		6415	93	-	22.88	-	-	19.14	-
	UNII6	6435	97	-	23.11	-	-	19.18	-
		6475	105	-	22.27	-	-	19.15	-
		6515	113	-	23.10	-	-	19.14	-
	UNII7	6535	117	-	23.04	-	-	19.14	-
		6695	149	-	23.09	-	-	19.17	-
		6855	181	-	22.91	-	-	19.09	-
	UNII8	6875	185	-	23.05	-	-	19.18	-
		6995	209	-	22.58	-	-	19.11	-
		7115	233	-	22.95	-	-	19.12	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
[HE20] SU	UNII5	5935	2	-	20.99	-	-	18.93	-
		6175	45	-	20.98	-	-	18.96	-
		6415	93	-	20.99	-	-	18.94	-
	UNII6	6435	97	-	21.27	-	-	18.93	-
		6475	105	-	21.24	-	-	18.94	-
		6515	113	-	21.01	-	-	18.94	-
	UNII7	6535	117	-	21.11	-	-	18.94	-
		6695	149	-	21.08	-	-	18.94	-
		6855	181	-	20.93	-	-	18.96	-
	UNII8	6875	185	-	20.87	-	-	18.93	-
		6995	209	-	21.02	-	-	18.95	-
		7115	233	-	21.15	-	-	18.94	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index :		RU Index :	RU Index :	RU Index :	
				Low	Mid	High	Low	Mid	High
[HE40] 26T	UNII5	5965	3	40.35	38.16	40.32	38.21	36.43	38.25
		6165	43	40.57	38.17	39.81	38.50	36.53	37.95
		6405	91	40.71	36.83	40.31	38.19	34.98	38.26
	UNII6	6445	99	40.41	38.12	40.01	38.03	36.45	38.27
		6485	107	40.60	38.05	40.28	38.26	36.08	38.28
		6525	115	40.17	38.23	40.60	38.13	36.45	38.44
	UNII7	6565	123	40.11	38.17	40.50	38.19	36.47	38.32
		6685	147	40.66	38.16	40.51	38.25	36.10	38.40
		6845	179	40.35	38.25	40.29	38.22	36.53	38.33
	UNII8	6885	187	40.37	38.18	40.63	38.12	36.48	38.35
		7005	211	40.56	38.08	40.27	38.02	36.30	38.01
		7085	227	40.64	38.24	40.11	38.32	36.46	37.80

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 52T	UNII5	5965	3	41.01	38.26	40.72	38.01	36.42	37.88
		6165	43	40.89	38.47	40.81	37.55	36.52	37.86
		6405	91	40.82	38.22	40.98	37.89	36.16	37.96
	UNII6	6445	99	40.49	38.24	41.20	37.67	36.31	38.02
		6485	107	40.93	38.47	40.86	37.95	36.35	38.02
		6525	115	40.98	38.28	41.17	37.95	36.27	38.11
	UNII7	6565	123	40.69	38.28	41.14	37.76	36.42	37.94
		6685	147	40.94	38.21	40.65	37.69	36.30	37.76
		6845	179	41.07	38.20	41.15	37.85	36.45	37.95
	UNII8	6885	187	41.09	38.25	41.04	37.84	36.31	38.00
		7005	211	41.06	38.23	40.57	37.73	36.25	37.85
		7085	227	41.02	38.31	40.81	37.75	36.11	37.70

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 106T	UNII5	5965	3	41.82	39.41	42.46	37.47	36.51	37.54
		6165	43	41.28	38.84	41.87	37.51	36.42	37.65
		6405	91	41.25	39.24	41.30	37.54	36.52	37.65
	UNII6	6445	99	41.40	39.33	41.93	37.38	36.46	37.70
		6485	107	41.31	39.61	41.66	37.53	36.59	37.58
		6525	115	41.59	39.54	41.76	37.42	36.52	37.71
	UNII7	6565	123	41.44	38.92	41.56	37.51	36.45	37.64
		6685	147	41.38	38.98	41.89	37.34	36.31	37.32
		6845	179	41.07	39.55	41.60	37.52	36.08	37.72
	UNII8	6885	187	41.65	39.15	41.75	37.45	36.24	37.66
		7005	211	41.46	39.50	41.46	37.43	36.45	37.43
		7085	227	41.56	39.31	41.74	37.53	36.11	37.62

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 242T	UNII5	5965	3	42.93	-	41.83	37.56	-	37.40
		6165	43	42.61	-	41.86	37.40	-	37.51
		6405	91	42.33	-	41.45	37.31	-	37.49
	UNII6	6445	99	41.98	-	41.93	37.47	-	37.45
		6485	107	42.16	-	41.95	37.39	-	37.46
		6525	115	42.23	-	41.92	37.46	-	37.51
	UNII7	6565	123	42.65	-	42.13	37.39	-	37.44
		6685	147	42.47	-	41.52	37.48	-	37.49
		6845	179	42.39	-	41.73	37.38	-	37.47
	UNII8	6885	187	41.95	-	41.79	37.54	-	37.43
		7005	211	42.09	-	42.01	37.46	-	37.39
		7085	227	42.27	-	42.28	37.46	-	37.38

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 484T	UNII5	5965	3	-	45.01	-	-	38.15	-
		6165	43	-	45.22	-	-	38.08	-
		6405	91	-	44.79	-	-	38.10	-
	UNII6	6445	99	-	44.69	-	-	38.13	-
		6485	107	-	44.83	-	-	38.04	-
		6525	115	-	44.60	-	-	38.08	-
	UNII7	6565	123	-	44.76	-	-	38.06	-
		6685	147	-	45.15	-	-	38.09	-
		6845	179	-	44.73	-	-	38.13	-
	UNII8	6885	187	-	44.22	-	-	38.10	-
		7005	211	-	44.21	-	-	38.03	-
		7085	227	-	44.67	-	-	38.11	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40]  SU	UNII5	5965	3	-	40.74	-	-	37.78	-
		6165	43	-	40.67	-	-	37.78	-
		6405	91	-	40.80	-	-	37.74	-
	UNII6	6445	99	-	40.79	-	-	37.73	-
		6485	107	-	40.59	-	-	37.74	-
		6525	115	-	40.75	-	-	37.76	-
	UNII7	6565	123	-	40.67	-	-	37.76	-
		6685	147	-	40.59	-	-	37.68	-
		6845	179	-	40.91	-	-	37.75	-
	UNII8	6885	187	-	40.71	-	-	37.74	-
		7005	211	-	40.49	-	-	37.70	-
		7085	227	-	40.53	-	-	37.72	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80]  26T	UNII5	5985	7	81.08	78.21	81.08	77.65	75.30	78.55
		6145	39	82.33	78.59	81.27	79.27	75.68	78.85
		6385	87	81.77	78.25	81.25	79.20	75.30	78.94
	UNII6	6465	103	81.54	78.45	82.30	78.88	75.63	79.17
		6545	119	82.32	78.32	80.97	79.05	75.55	79.31
		6625	135	82.06	78.17	81.25	82.06	78.17	81.25
	UNII7	6705	151	81.66	78.53	80.90	78.69	75.62	78.92
		6785	167	83.21	77.60	82.18	79.14	74.62	79.04
		6865	183	82.50	78.47	81.73	79.08	75.47	78.85
	UNII8	6945	199	82.04	78.28	81.40	79.22	75.67	78.73
		7025	215	80.86	78.30	80.97	78.52	75.28	78.61

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 52T	UNII5	5985	7	82.81	78.47	83.12	78.58	74.98	78.27
		6145	39	83.65	78.71	83.98	78.48	75.32	78.28
		6385	87	83.43	78.74	82.00	78.35	75.20	77.79
	UNII6	6465	103	83.12	78.51	82.66	78.47	75.16	78.26
		6545	119	83.24	78.86	83.49	78.25	75.32	78.37
	UNII7	6625	135	83.71	78.86	83.03	78.58	75.43	78.17
		6705	151	83.72	78.14	83.55	78.47	74.69	78.60
		6785	167	82.93	78.55	82.74	78.43	75.04	78.18
	UNII8	6865	183	82.65	78.65	82.39	78.54	75.06	77.83
		6945	199	83.51	78.87	82.69	78.57	75.31	78.29
		7025	215	82.91	78.33	83.45	78.23	75.11	78.50

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 106T	UNII5	5985	7	84.15	79.99	83.34	77.49	75.36	77.46
		6145	39	83.99	79.56	82.62	77.72	75.09	77.23
		6385	87	84.54	79.55	83.90	77.84	75.19	76.74
	UNII6	6465	103	84.61	78.53	83.50	77.76	74.72	77.42
		6545	119	84.09	79.89	83.49	77.64	75.37	77.54
	UNII7	6625	135	82.67	79.31	82.89	76.66	74.81	77.58
		6705	151	83.92	79.50	83.49	77.58	75.16	77.62
		6785	167	83.99	79.72	82.97	77.77	75.39	77.00
	UNII8	6865	183	83.97	79.63	82.44	77.45	75.45	77.07
		6945	199	84.14	79.73	82.92	77.62	75.46	77.59
		7025	215	84.25	79.78	83.55	77.57	75.22	77.50

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 242T	UNII5	5985	7	84.22	80.86	82.93	77.22	75.32	76.77
		6145	39	84.55	81.03	83.35	77.24	75.46	76.60
		6385	87	83.94	80.59	82.69	77.12	75.26	76.98
	UNII6	6465	103	84.60	80.79	83.57	77.06	75.38	77.04
		6545	119	83.44	80.72	84.74	77.15	75.52	76.98
	UNII7	6625	135	82.81	80.30	83.41	76.58	75.21	76.86
		6705	151	83.63	80.16	83.65	77.16	75.21	76.80
		6785	167	84.02	80.20	83.50	77.35	75.35	76.66
	UNII8	6865	183	83.71	80.61	83.67	77.10	75.33	77.03
		6945	199	83.65	80.42	84.42	77.26	74.11	76.94
		7025	215	83.94	80.87	83.66	77.22	75.13	76.97

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 484T	UNII5	5985	7	87.22	-	85.03	77.11	-	76.65
		6145	39	88.20	-	84.95	77.08	-	76.59
		6385	87	87.93	-	85.97	76.95	-	76.75
	UNII6	6465	103	87.43	-	83.86	77.07	-	76.86
		6545	119	87.38	-	84.75	76.86	-	76.88
	UNII7	6625	135	87.15		85.38	76.92		76.96
		6705	151	86.54	-	86.00	76.87	-	76.84
		6785	167	87.88		85.18	76.32		76.75
	UNII8	6865	183	86.57	-	85.21	77.14	-	76.86
		6945	199	88.02	-	85.24	77.18	-	76.70
		7025	215	87.08	-	84.95	77.14	-	76.79

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 996T	UNII5	5985	7	-	89.10	-	-	77.78	-
		6145	39	-	88.92	-	-	77.86	-
		6385	87	-	87.88	-	-	77.70	-
	UNII6	6465	103	-	87.97	-	-	77.76	-
		6545	119	-	88.89	-	-	77.78	-
	UNII7	6625	135		88.80			77.77	
		6705	151	-	88.88	-	-	77.77	-
		6785	167		88.52			77.74	
	UNII8	6865	183	-	89.71	-	-	77.77	-
		6945	199	-	88.85	-	-	77.80	-
		7025	215	-	89.17	-	-	77.77	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] SU	UNII5	5985	7	-	82.44	-	-	77.27	-
		6145	39	-	82.51	-	-	77.26	-
		6385	87	-	82.43	-	-	77.29	-
	UNII6	6465	103	-	82.43	-	-	77.14	-
		6545	119	-	82.76	-	-	77.30	-
	UNII7	6625	135		82.16			77.31	
		6705	151	-	82.84	-	-	77.30	-
		6785	167		81.99			77.30	
	UNII8	6865	183	-	82.89	-	-	77.37	-
		6945	199	-	82.55	-	-	77.35	-
		7025	215	-	82.50	-	-	77.30	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 26T	UNII5	6025	15	163.6	158.1	157.0	159.34	153.72	153.44
		6185	47	164.0	158.1	157.9	160.10	154.16	153.80
		6345	79	163.7	157.1	157.2	159.01	152.99	152.60
	UNII6	6505	111	162.8	157.6	158.0	158.74	152.79	153.81
	UNII7	6665	143	163.3	157.1	158.6	158.63	152.96	154.21
	UNII8	6825	175	164.0	157.9	157.6	159.33	153.20	153.47
		6985	207	163.8	157.9	157.3	159.39	154.29	153.63

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 52T	UNII5	6025	15	164.9	158.0	158.5	158.82	152.74	152.32
		6185	47	165.3	157.8	157.9	158.97	152.85	152.60
		6345	79	163.3	158.1	158.0	157.71	152.33	152.93
	UNII6	6505	111	163.3	157.2	157.4	157.67	152.00	151.86
	UNII7	6665	143	163.5	158.4	158.1	157.78	153.16	152.87
	UNII8	6825	175	164.9	157.8	158.1	158.17	151.53	153.25
		6985	207	165.4	157.8	158.6	158.85	153.12	154.07

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 106T	UNII5	6025	15	165.0	158.9	159.2	158.07	152.74	153.00
		6185	47	165.5	159.1	159.8	157.40	153.21	153.26
		6345	79	166.0	159.0	159.3	157.02	152.32	152.92
	UNII6	6505	111	165.5	159.2	159.4	157.58	152.84	153.29
	UNII7	6665	143	165.8	159.0	159.3	156.78	152.63	152.40
	UNII8	6825	175	165.3	159.4	158.0	157.39	153.09	147.65
		6985	207	164.9	159.6	158.2	157.48	153.29	151.89

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 242T	UNII5	6025	15	165.4	160.8	160.0	156.34	153.83	152.60
		6185	47	167.0	159.7	160.1	156.89	153.20	153.54
		6345	79	164.5	159.7	160.1	155.88	151.93	152.83
	UNII6	6505	111	169.0	159.9	160.2	155.48	152.74	152.46
	UNII7	6665	143	164.7	159.9	160.7	156.19	152.52	153.29
	UNII8	6825	175	166.5	160.0	159.5	156.49	151.94	152.53
		6985	207	165.5	160.1	159.5	156.30	153.18	153.13

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 484T	UNII5	6025	15	168.0	-	162.2	156.41	-	152.59
		6185	47	165.8	-	160.7	156.12	-	152.87
		6345	79	166.5	-	161.7	155.65	-	152.53
	UNII6	6505	111	169.9	-	160.7	155.92	-	152.81
	UNII7	6665	143	166.7	-	161.3	155.16	-	153.22
	UNII8	6825	175	168.3	-	162.4	155.89	-	152.56
		6985	207	168.1	-	162.8	154.19	-	153.46

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 996T	UNII5	6025	15	-	168.7	-	-	156.18	-
		6185	47	-	169.0	-	-	156.00	-
		6345	79	-	167.7	-	-	155.56	-
	UNII6	6505	111	-	166.8	-	-	156.11	-
	UNII7	6665	143	-	168.8	-	-	155.18	-
	UNII8	6825	175	-	168.3	-	-	155.01	-
		6985	207	-	168.2	-	-	155.84	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 26T	UNII5	6025	15	157.7	158.3	163.4	154.19	153.78	159.53
		6185	47	158.1	158.8	163.3	154.14	154.61	159.98
		6345	79	158.2	158.0	163.6	154.18	153.72	159.86
	UNII6	6505	111	158.5	158.1	162.8	154.07	154.04	159.98
	UNII7	6665	143	147.7	158.1	163.9	143.00	153.96	159.89
	UNII8	6825	175	158.2	158.2	163.8	153.41	154.16	159.40
		6985	207	158.1	158.1	162.5	154.60	153.90	159.78

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 52T	UNII5	6025	15	158.7	158.6	163.2	153.30	152.85	157.58
		6185	47	159.0	158.8	164.6	153.49	153.61	158.06
		6345	79	158.8	156.2	164.3	153.45	151.47	157.89
	UNII6	6505	111	154.9	158.5	163.4	149.58	153.06	158.66
	UNII7	6665	143	157.8	158.8	164.6	152.16	153.30	159.39
	UNII8	6825	175	158.2	158.3	163.3	153.03	152.63	158.58
		6985	207	158.0	158.1	164.0	153.00	153.04	158.83

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 106T	UNII5	6025	15	158.9	159.4	163.5	151.68	152.46	156.63
		6185	47	159.4	159.3	164.9	153.41	153.31	157.40
		6345	79	158.6	158.6	164.6	152.71	152.04	157.54
	UNII6	6505	111	159.2	159.6	164.0	152.92	153.89	157.56
	UNII7	6665	143	158.8	158.9	165.3	152.27	152.98	157.93
	UNII8	6825	175	159.5	159.5	164.3	152.54	152.75	157.56
		6985	207	159.4	159.1	164.5	153.49	153.57	156.74

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 242T	UNII5	6025	15	160.5	159.8	163.4	153.44	152.71	155.39
		6185	47	153.5	160.3	165.8	146.49	153.29	156.01
		6345	79	159.3	159.8	164.7	153.05	151.79	156.25
	UNII6	6505	111	160.8	160.4	169.4	153.60	154.22	156.24
	UNII7	6665	143	159.5	158.8	165.6	151.96	152.27	156.67
	UNII8	6825	175	157.7	159.9	165.5	151.71	152.80	156.21
		6985	207	160.4	159.8	165.3	153.18	152.96	156.51

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 484T	UNII5	6025	15	161.6	-	165.9	152.82	-	155.68
		6185	47	159.4	-	164.3	152.76	-	155.76
		6345	79	161.4	-	165.4	152.73	-	156.46
	UNII6	6505	111	161.4	-	166.9	153.33	-	156.84
	UNII7	6665	143	161.0	-	165.9	153.19	-	156.21
	UNII8	6825	175	161.1	-	167.9	152.58	-	156.21
		6985	207	161.3	-	162.9	153.22	-	152.91

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 996T	UNII5	6025	15	-	165.8	-	-	155.21	-
		6185	47	-	164.1	-	-	155.52	-
		6345	79	-	166.0	-	-	155.93	-
	UNII6	6505	111	-	165.9	-	-	155.56	-
	UNII7	6665	143	-	166.9	-	-	155.81	-
	UNII8	6825	175	-	164.1	-	-	155.12	-
		6985	207	-	165.8	-	-	155.88	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE160] 996*2T	UNII5	6025	15	-	165.8	-	-	156.22	-
		6185	47	-	165.4	-	-	156.34	-
		6345	79	-	164.9	-	-	156.09	-
	UNII6	6505	111	-	164.3	-	-	156.45	-
	UNII7	6665	143	-	165.1	-	-	156.08	-
	UNII8	6825	175	-	165.6	-	-	156.21	-
		6985	207	-	165.7	-	-	156.32	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE160] SU	UNII5	6025	15	-	165.7	-	-	156.29	-
		6185	47	-	164.9	-	-	156.24	-
		6345	79	-	164.7	-	-	156.37	-
	UNII6	6505	111	-	165.4	-	-	156.17	-
	UNII7	6665	143	-	167.1	-	-	156.28	-
	UNII8	6825	175	-	164.5	-	-	156.24	-
		6985	207	-	165.1	-	-	156.31	-

Mode	Band	Freq. [MHz]	CH.	26 dB Bandwidth [MHz]			99% Occupied Bandwidth[MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
802.11a	UNII5	5935	2	-	19.09	-	-	16.38	-
		6175	45	-	19.07	-	-	16.37	-
		6415	93	-	19.16	-	-	16.37	-
	UNII6	6435	97	-	19.05	-	-	16.37	-
		6475	105	-	19.06	-	-	16.37	-
		6515	113	-	19.09	-	-	16.37	-
	UNII7	6535	117	-	19.10	-	-	16.37	-
		6695	149	-	19.08	-	-	16.36	-
		6855	181	-	19.17	-	-	16.37	-
	UNII8	6875	185	-	19.13	-	-	16.37	-
		6995	209	-	18.99	-	-	16.37	-
		7115	233	-	19.14	-	-	16.37	-

### 10.2.2 26 dB BANDWIDTH(Standard client)

#### 10.2.2.1 Ant1

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE20]	UNII5	5935	2	20.35	18.88	20.56	18.60	17.30	18.70
		6175	45	20.48	18.73	20.17	18.60	17.34	18.68
		6415	93	20.21	18.60	20.71	18.61	17.33	18.72
26T	UNII7	6535	117	20.25	18.93	20.60	18.62	17.27	18.47
		6695	149	20.63	18.53	20.64	18.63	17.11	18.73
		6855	181	20.74	19.01	20.68	18.64	17.26	18.66

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE20]	UNII5	5935	2	21.18	19.49	20.59	18.34	17.23	18.33
		6175	45	20.96	19.20	20.75	18.36	17.24	18.38
		6415	93	21.13	19.07	20.62	18.40	17.24	18.35
52T	UNII7	6535	117	21.00	19.26	20.55	18.37	17.26	18.28
		6695	149	20.64	19.10	20.90	18.15	17.31	18.04
		6855	181	20.83	19.51	20.60	18.07	17.26	18.18

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index :	RU Index :	RU Index :	RU Index :	RU Index :	RU Index :
				Low	Mid	High	Low	Mid	High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE20]	UNII5	5935	2	21.77	-	21.24	18.22	-	18.14
		6175	45	21.99	-	21.28	18.38	-	18.37
		6415	93	21.70	-	21.19	18.35	-	18.40
106T	UNII7	6535	117	21.74	-	21.28	18.29	-	18.16
		6695	149	21.79	-	21.14	18.30	-	18.42
		6855	181	21.75	-	21.25	18.12	-	18.38

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE20] 242T	UNII5	5935	2	-	22.54	-	-	19.10	-
		6175	45	-	22.36	-	-	19.08	-
		6415	93	-	22.37	-	-	19.10	-
	UNII7	6535	117	-	22.48	-	-	19.09	-
		6695	149	-	22.55	-	-	19.10	-
		6855	181	-	22.53	-	-	19.09	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE20] SU	UNII5	5935	2	-	21.10	-	-	18.93	-
		6175	45	-	21.18	-	-	18.93	-
		6415	93	-	20.85	-	-	18.93	-
	UNII7	6535	117	-	20.79	-	-	18.92	-
		6695	149	-	21.12	-	-	18.92	-
		6855	181	-	20.85	-	-	18.92	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40] 26T	UNII5	5965	3	40.51	38.24	40.53	38.16	36.43	38.38
		6165	43	40.65	38.07	40.83	38.41	36.45	38.41
		6405	91	40.52	38.15	40.76	38.13	36.23	38.44
	UNII7	6565	123	40.65	38.19	40.40	38.23	36.15	38.21
		6685	147	40.50	37.97	40.33	38.30	36.19	38.38
		6845	179	40.83	38.26	39.93	38.18	36.43	38.18

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40] 52T	UNII5	5965	3	41.19	38.34	41.28	37.68	36.49	38.01
		6165	43	40.65	38.39	40.80	37.69	36.42	37.85
		6405	91	41.26	38.37	41.26	37.78	36.33	37.94
	UNII7	6565	123	40.45	37.61	41.04	37.77	35.88	37.97
		6685	147	40.81	38.30	41.06	37.75	36.51	37.98
		6845	179	40.94	38.49	41.53	37.78	36.45	37.95

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40] 106T	UNII5	5965	3	41.68	38.97	41.78	37.51	36.61	37.53
		6165	43	41.60	38.87	42.18	37.44	36.51	37.34
		6405	91	41.50	39.48	41.56	37.36	36.58	37.66
	UNII7	6565	123	41.51	39.15	41.49	37.40	36.36	37.62
		6685	147	41.09	39.21	41.74	37.48	36.56	37.35
		6845	179	41.25	39.26	41.17	37.48	36.29	37.38

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40] 242T	UNII5	5965	3	42.29	-	41.13	37.37	-	37.19
		6165	43	42.68	-	42.29	37.51	-	37.25
		6405	91	42.14	-	41.58	37.37	-	37.22
	UNII7	6565	123	42.29	-	42.18	37.40	-	37.49
		6685	147	42.14	-	41.94	37.28	-	37.50
		6845	179	42.42	-	42.64	37.37	-	37.38

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40] 484T	UNII5	5965	3	-	44.96	-	-	38.06	-
		6165	43	-	45.08	-	-	38.11	-
		6405	91	-	44.82	-	-	38.05	-
	UNII7	6565	123	-	44.51	-	-	38.05	-
		6685	147	-	44.57	-	-	38.00	-
		6845	179	-	44.68	-	-	38.05	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE40] SU	UNII5	5965	3	-	40.73	-	-	37.77	-
		6165	43	-	40.84	-	-	37.76	-
		6405	91	-	40.88	-	-	37.76	-
	UNII7	6565	123	-	40.66	-	-	37.78	-
		6685	147	-	40.79	-	-	37.75	-
		6845	179	-	40.80	-	-	37.76	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 26T	UNII5	5985	7	81.99	78.37	80.90	78.80	75.17	78.56
		6145	39	81.48	78.38	81.94	78.98	75.59	78.84
		6385	87	82.70	78.46	81.62	79.28	75.38	78.98
	UNII7	6625	135	81.98	78.36	81.70	79.27	75.64	79.04
		6705	151	82.11	78.50	81.16	78.96	75.48	78.60
		6785	167	81.79	78.55	81.30	79.12	75.54	78.62

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 52T	UNII5	5985	7	83.44	79.06	82.54	78.77	75.27	78.11
		6145	39	82.99	78.71	82.72	78.28	74.88	78.21
		6385	87	82.67	78.15	83.05	78.21	74.62	78.07
	UNII7	6625	135	82.78	78.60	83.02	78.22	75.10	78.58
		6705	151	83.11	78.96	83.50	78.35	75.26	78.51
		6785	167	83.35	78.88	83.22	78.44	75.07	78.65

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 106T	UNII5	5985	7	83.14	80.46	82.33	77.43	75.11	77.27
		6145	39	84.32	79.91	83.18	77.82	75.41	77.32
		6385	87	83.61	79.79	83.13	77.66	75.05	77.30
	UNII7	6625	135	84.41	79.38	82.08	77.81	75.34	77.64
		6705	151	84.00	79.51	82.56	77.57	75.24	77.33
		6785	167	84.22	79.31	83.28	77.35	75.06	77.63

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 242T	UNII5	5985	7	84.90	80.64	84.10	77.37	75.16	76.86
		6145	39	83.26	79.95	83.27	77.21	75.16	76.99
		6385	87	83.45	80.31	83.47	77.26	75.44	77.11
	UNII7	6625	135	83.98	80.54	84.63	77.12	75.55	77.36
		6705	151	84.37	81.22	83.62	77.10	75.43	77.13
		6785	167	84.91	80.72	84.86	77.33	75.27	77.27

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 484T	UNII5	5985	7	87.77	-	85.03	77.08	-	76.67
		6145	39	86.85	-	85.22	77.24	-	76.59
		6385	87	85.33	-	84.64	76.92	-	76.67
	UNII7	6625	135	86.77	-	85.48	76.90	-	76.50
		6705	151	86.73	-	84.89	76.99	-	76.81
		6785	167	87.11	-	85.34	76.92	-	76.83

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] 996T	UNII5	5985	7	-	88.03	-	-	77.75	-
		6145	39	-	89.04	-	-	77.77	-
		6385	87	-	87.97	-	-	77.77	-
	UNII7	6625	135	-	88.15	-	-	77.68	-
		6705	151	-	87.81	-	-	77.67	-
		6785	167	-	88.01	-	-	77.70	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80] SU	UNII5	5985	7	-	82.02	-	-	77.17	-
		6145	39	-	82.29	-	-	77.34	-
		6385	87	-	82.46	-	-	77.35	-
	UNII7	6625	135	-	82.03	-	-	77.35	-
		6705	151	-	82.05	-	-	77.29	-
		6785	167	-	82.42	-	-	77.31	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80L] 26T	UNII5	6025	15	163.9	158.0	157.5	159.70	152.86	153.62
		6185	47	163.2	157.5	157.0	158.68	153.41	152.98
	UNII7	6345	79	163.9	157.8	157.2	159.11	153.02	152.92
		6665	143	161.9	158.3	158.1	158.62	153.73	152.80

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80L] 52T	UNII5	6025	15	165.1	158.6	158.1	159.31	153.60	152.52
		6185	47	164.8	157.9	158.2	158.51	152.79	153.26
	UNII7	6345	79	163.1	157.4	157.8	157.27	151.29	152.24
		6665	143	164.6	158.7	158.1	157.69	152.55	152.66

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80L] 106T	UNII5	6025	15	165.0	157.0	158.9	157.93	151.45	152.85
		6185	47	166.7	160.1	158.3	157.46	153.58	152.57
	UNII7	6345	79	165.4	159.3	157.6	157.20	152.35	150.79
		6665	143	165.9	159.8	155.0	157.04	153.09	148.07

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80L] 242T	UNII5	6025	15	167.1	159.5	160.3	157.49	152.64	152.63
		6185	47	165.1	159.5	160.0	156.85	153.13	152.93
	UNII7	6345	79	164.8	159.4	160.2	156.82	151.95	153.33
		6665	143	164.2	159.9	160.4	156.19	153.04	153.47

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80L] 484T	UNII5	6025	15	168.6	-	162.3	157.02	-	150.17
		6185	47	167.1	-	162.0	156.11	-	152.57
	UNII7	6345	79	168.6	-	160.9	155.79	-	152.00
		6665	143	168.2	-	162.1	155.91	-	152.96

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80L] 996T	UNII5	6025	15	-	169.1	-	-	155.23	-
		6185	47	-	168.9	-	-	156.33	-
	UNII7	6345	79	-	168.8	-	-	155.47	-
		6665	143	-	168.0	-	-	155.58	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80U] 26T	UNII5	6025	15	156.8	158.0	162.1	152.78	153.76	159.25
		6185	47	158.0	158.2	163.7	154.28	153.34	159.27
	UNII7	6345	79	158.0	158.4	162.5	153.38	153.49	159.14
		6665	143	155.4	158.3	163.5	151.25	153.83	159.78

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80U] 52T	UNII5	6025	15	158.6	158.8	164.3	153.22	152.56	157.05
		6185	47	158.9	158.3	163.6	152.27	152.22	157.89
	UNII7	6345	79	157.5	158.6	164.6	152.64	153.20	157.95
		6665	143	158.2	158.5	164.2	152.35	153.19	158.52

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80U]	UNII5	6025	15	159.4	158.9	164.4	153.39	152.67	156.39
		6185	47	158.6	159.3	164.1	152.33	152.85	156.87
		6345	79	158.4	160.0	164.6	151.87	153.47	157.15
	UNII7	6665	143	159.7	159.7	163.7	152.89	153.29	157.65

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80U]	UNII5	6025	15	159.8	160.2	163.6	152.83	152.30	155.60
		6185	47	160.2	160.2	163.8	153.38	153.17	155.95
		6345	79	159.6	160.4	164.6	152.74	153.55	156.37
	UNII7	6665	143	160.1	159.4	164.6	152.89	152.70	156.51

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80U]	UNII5	6025	15	161.7	-	166.6	151.96	-	155.63
		6185	47	161.4	-	166.1	153.44	-	155.54
		6345	79	161.8	-	166.2	152.96	-	155.91
	UNII7	6665	143	162.5	-	166.5	152.89	-	156.17

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE80U]	UNII5	6025	15	-	166.3	-	-	155.35	-
		6185	47	-	165.2	-	-	155.11	-
		6345	79	-	164.8	-	-	154.92	-
	UNII7	6665	143	-	166.0	-	-	156.00	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE160] 996*2T	UNII5	6025	15	-	165.1	-	-	156.08	-
		6185	47	-	165.5	-	-	156.07	-
		6345	79	-	165.6	-	-	156.29	-
	UNII7	6665	143	-	166.3	-	-	156.32	-

Mode	Band	Freq.[MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
[HE160] SU	UNII5	6025	15	-	164.7	-	-	156.62	-
		6185	47	-	164.4	-	-	156.07	-
		6345	79	-	165.4	-	-	156.32	-
	UNII7	6665	143	-	165.7	-	-	156.09	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT1	ANT1	ANT1	ANT1	ANT1	ANT1
802.11a	UNII5	5935	2	-	19.08	-	-	16.36	-
		6175	45	-	19.11	-	-	16.36	-
		6415	93	-	19.20	-	-	16.37	-
	UNII7	6535	117	-	19.14	-	-	16.37	-
		6695	149	-	19.05	-	-	16.36	-
		6855	181	-	19.00	-	-	16.37	-

**10.2.2.1 Ant2**

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 26T	UNII5	5935	2	20.36	18.49	20.82	18.49	17.35	18.59
		6175	45	20.78	18.54	20.71	18.62	17.33	18.73
		6415	93	20.57	18.74	20.88	18.59	17.36	18.70
	UNII7	6535	117	20.64	18.87	20.60	18.39	17.20	18.70
		6695	149	20.62	18.65	20.64	18.51	17.33	18.66
		6855	181	20.63	19.01	20.42	18.63	17.21	18.66

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 52T	UNII5	5935	2	21.06	19.35	20.61	18.36	17.01	18.36
		6175	45	21.03	19.20	20.56	18.40	17.32	18.31
		6415	93	20.98	19.29	20.57	18.26	17.27	18.30
	UNII7	6535	117	20.99	19.26	20.83	17.97	17.05	18.21
		6695	149	21.01	19.14	20.64	18.24	17.27	18.24
		6855	181	21.23	19.37	20.67	18.14	17.23	18.37

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 106T	UNII5	5935	2	21.66	-	21.15	18.29	-	18.42
		6175	45	21.73	-	21.17	18.30	-	18.40
		6415	93	21.81	-	21.11	18.26	-	18.41
	UNII7	6535	117	21.52	-	21.17	18.33	-	18.40
		6695	149	21.95	-	21.14	18.37	-	18.39
		6855	181	21.46	-	21.17	18.25	-	18.36

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] 242T	UNII5	5935	2	-	22.72	-	-	19.16	-
		6175	45	-	22.56	-	-	19.16	-
		6415	93	-	22.88	-	-	19.14	-
	UNII7	6535	117	-	23.04	-	-	19.14	-
		6695	149	-	23.09	-	-	19.17	-
		6855	181	-	22.91	-	-	19.09	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE20] SU	UNII5	5935	2	-	20.99	-	-	18.93	-
		6175	45	-	20.98	-	-	18.96	-
		6415	93	-	20.99	-	-	18.94	-
	UNII7	6535	117	-	21.11	-	-	18.94	-
		6695	149	-	21.08	-	-	18.94	-
		6855	181	-	20.93	-	-	18.96	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 26T	UNII5	5965	3	40.35	38.16	40.32	38.21	36.43	38.25
		6165	43	40.57	38.17	39.81	38.50	36.53	37.95
		6405	91	40.71	36.83	40.31	38.19	34.98	38.26
	UNII7	6565	123	40.11	38.17	40.50	38.19	36.47	38.32
		6685	147	40.66	38.16	40.51	38.25	36.10	38.40
		6845	179	40.35	38.25	40.29	38.22	36.53	38.33

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 52T	UNII5	5965	3	41.01	38.26	40.72	38.01	36.42	37.88
		6165	43	40.89	38.47	40.81	37.55	36.52	37.86
		6405	91	40.82	38.22	40.98	37.89	36.16	37.96
	UNII7	6565	123	40.69	38.28	41.14	37.76	36.42	37.94
		6685	147	40.94	38.21	40.65	37.69	36.30	37.76
		6845	179	41.07	38.20	41.15	37.85	36.45	37.95

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 106T	UNII5	5965	3	41.82	39.41	42.46	37.47	36.51	37.54
		6165	43	41.28	38.84	41.87	37.51	36.42	37.65
		6405	91	41.25	39.24	41.30	37.54	36.52	37.65
	UNII7	6565	123	41.44	38.92	41.56	37.51	36.45	37.64
		6685	147	41.38	38.98	41.89	37.34	36.31	37.32
		6845	179	41.07	39.55	41.60	37.52	36.08	37.72

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 242T	UNII5	5965	3	42.93	-	41.83	37.56	-	37.40
		6165	43	42.61	-	41.86	37.40	-	37.51
		6405	91	42.33	-	41.45	37.31	-	37.49
	UNII7	6565	123	42.65	-	42.13	37.39	-	37.44
		6685	147	42.47	-	41.52	37.48	-	37.49
		6845	179	42.39	-	41.73	37.38	-	37.47

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] 484T	UNII5	5965	3	-	45.01	-	-	38.15	-
		6165	43	-	45.22	-	-	38.08	-
		6405	91	-	44.79	-	-	38.10	-
	UNII7	6565	123	-	44.76	-	-	38.06	-
		6685	147	-	45.15	-	-	38.09	-
		6845	179	-	44.73	-	-	38.13	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE40] SU	UNII5	5965	3	-	40.74	-	-	37.78	-
		6165	43	-	40.67	-	-	37.78	-
		6405	91	-	40.80	-	-	37.74	-
	UNII7	6565	123	-	40.67	-	-	37.76	-
		6685	147	-	40.59	-	-	37.68	-
		6845	179	-	40.91	-	-	37.75	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 26T	UNII5	5985	7	81.08	78.21	81.08	77.65	75.30	78.55
		6145	39	82.33	78.59	81.27	79.27	75.68	78.85
		6385	87	81.77	78.25	81.25	79.20	75.30	78.94
	UNII7	6625	135	82.06	78.17	81.25	78.86	75.23	78.59
		6705	151	81.66	78.53	80.90	78.69	75.62	78.92
		6785	167	83.21	77.60	82.18	79.14	74.62	79.04

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 52T	UNII5	5985	7	82.81	78.47	83.12	78.58	74.98	78.27
		6145	39	83.65	78.71	83.98	78.48	75.32	78.28
		6385	87	83.43	78.74	82.00	78.35	75.20	77.79
	UNII7	6625	135	83.71	78.86	83.03	78.58	75.43	78.17
		6705	151	83.72	78.14	83.55	78.47	74.69	78.60
		6785	167	82.93	78.55	82.74	78.43	75.04	78.18

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 106T	UNII5	5985	7	84.15	79.99	83.34	77.49	75.36	77.46
		6145	39	83.99	79.56	82.62	77.72	75.09	77.23
		6385	87	84.54	79.55	83.90	77.84	75.19	76.74
	UNII7	6625	135	82.67	79.31	82.89	76.66	74.81	77.58
		6705	151	83.92	79.50	83.49	77.58	75.16	77.62
		6785	167	83.99	79.72	82.97	77.77	75.39	77.00

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 242T	UNII5	5985	7	84.22	80.86	82.93	77.22	75.32	76.77
		6145	39	84.55	81.03	83.35	77.24	75.46	76.60
		6385	87	83.94	80.59	82.69	77.12	75.26	76.98
	UNII7	6625	135	82.81	80.30	83.41	76.58	75.21	76.86
		6705	151	83.63	80.16	83.65	77.16	75.21	76.80
		6785	167	84.02	80.20	83.50	77.35	75.35	76.66

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 484T	UNII5	5985	7	87.22	-	85.03	77.11	-	76.65
		6145	39	88.20	-	84.95	77.08	-	76.59
		6385	87	87.93	-	85.97	76.95	-	76.75
	UNII7	6625	135	87.15	-	85.38	76.92	-	76.96
		6705	151	86.54	-	86.00	76.87	-	76.84
		6785	167	87.88	-	85.18	76.32	-	76.75

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] 996T	UNII5	5985	7	-	89.10	-	-	77.78	-
		6145	39	-	88.92	-	-	77.86	-
		6385	87	-	87.88	-	-	77.70	-
	UNII7	6625	135	-	88.80	-	-	77.77	-
		6705	151	-	88.88	-	-	77.77	-
		6785	167	-	88.52	-	-	77.74	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80] SU	UNII5	5985	7	-	82.44	-	-	77.27	-
		6145	39	-	82.51	-	-	77.26	-
		6385	87	-	82.43	-	-	77.29	-
	UNII7	6625	135	-	82.16	-	-	77.31	-
		6705	151	-	82.84	-	-	77.30	-
		6785	167	-	81.99	-	-	77.30	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 26T	UNII5	6025	15	163.6	158.1	157.0	159.34	153.72	153.44
		6185	47	164.0	158.1	157.9	160.10	154.16	153.80
	UNII7	6345	79	163.7	157.1	157.2	159.01	152.99	152.60
		6665	143	163.3	157.1	158.6	158.63	152.96	154.21

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 52T	UNII5	6025	15	164.9	158.0	158.5	158.82	152.74	152.32
		6185	47	165.3	157.8	157.9	158.97	152.85	152.60
	UNII7	6345	79	163.3	158.1	158.0	157.71	152.33	152.93
		6665	143	163.5	158.4	158.1	157.78	153.16	152.87

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 106T	UNII5	6025	15	165.0	158.9	159.2	158.07	152.74	153.00
		6185	47	165.5	159.1	159.8	157.40	153.21	153.26
	UNII7	6345	79	166.0	159.0	159.3	157.02	152.32	152.92
		6665	143	165.8	159.0	159.3	156.78	152.63	152.40

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 242T	UNII5	6025	15	165.4	160.8	160.0	156.34	153.83	152.60
		6185	47	167.0	159.7	160.1	156.89	153.20	153.54
	UNII7	6345	79	164.5	159.7	160.1	155.88	151.93	152.83
		6665	143	164.7	159.9	160.7	156.19	152.52	153.29

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 484T	UNII5	6025	15	168.0	-	162.2	156.41	-	152.59
		6185	47	165.8	-	160.7	156.12	-	152.87
	UNII7	6345	79	166.5	-	161.7	155.65	-	152.53
		6665	143	166.7	-	161.3	155.16	-	153.22

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80L] 996T	UNII5	6025	15	-	168.7	-	-	156.18	-
		6185	47	-	169.0	-	-	156.00	-
	UNII7	6345	79	-	167.7	-	-	155.56	-
		6665	143	-	168.8	-	-	155.18	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 26T	UNII5	6025	15	157.7	158.3	163.4	154.19	153.78	159.53
		6185	47	158.1	158.8	163.3	154.14	154.61	159.98
	UNII7	6345	79	158.2	158.0	163.6	154.18	153.72	159.86
		6665	143	147.7	158.1	163.9	143.00	153.96	159.89

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 52T	UNII5	6025	15	158.7	158.6	163.2	153.30	152.85	157.58
		6185	47	159.0	158.8	164.6	153.49	153.61	158.06
	UNII7	6345	79	158.8	156.2	164.3	153.45	151.47	157.89
		6665	143	157.8	158.8	164.6	152.16	153.30	159.39

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 106T	UNII5	6025	15	158.9	159.4	163.5	151.68	152.46	156.63
		6185	47	159.4	159.3	164.9	153.41	153.31	157.40
	UNII7	6345	79	158.6	158.6	164.6	152.71	152.04	157.54
		6665	143	158.8	158.9	165.3	152.27	152.98	157.93

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 242T	UNII5	6025	15	160.5	159.8	163.4	153.44	152.71	155.39
		6185	47	153.5	160.3	165.8	146.49	153.29	156.01
	UNII7	6345	79	159.3	159.8	164.7	153.05	151.79	156.25
		6665	143	159.5	158.8	165.6	151.96	152.27	156.67

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 484T	UNII5	6025	15	161.6	-	165.9	152.82	-	155.68
		6185	47	159.4	-	164.3	152.76	-	155.76
	UNII7	6345	79	161.4	-	165.4	152.73	-	156.46
		6665	143	161.0	-	165.9	153.19	-	156.21

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE80U] 996T	UNII5	6025	15	-	165.8	-	-	155.21	-
		6185	47	-	164.1	-	-	155.52	-
	UNII7	6345	79	-	166.0	-	-	155.93	-
		6665	143	-	166.9	-	-	155.81	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE160] 996*2T	UNII5	6025	15	-	165.8	-	-	156.22	-
		6185	47	-	165.4	-	-	156.34	-
		6345	79	-	164.9	-	-	156.09	-
	UNII7	6665	143	-	165.1	-	-	156.08	-

Mode	Band	Freq.[MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
[HE160] SU	UNII5	6025	15	-	165.7	-	-	156.29	-
		6185	47	-	164.9	-	-	156.24	-
		6345	79	-	164.7	-	-	156.37	-
	UNII7	6665	143	-	167.1	-	-	156.28	-

Mode	Band	Freq. [MHz]	CH.	26db Bandwidth [MHz]			99% Occupied Bandwidth [MHz]		
				RU Index : Low	RU Index : Mid	RU Index : High	RU Index : Low	RU Index : Mid	RU Index : High
				ANT2	ANT2	ANT2	ANT2	ANT2	ANT2
802.11a	UNII5	5935	2	-	19.09	-	-	16.38	-
		6175	45	-	19.07	-	-	16.37	-
		6415	93	-	19.16	-	-	16.37	-
	UNII7	6535	117	-	19.10	-	-	16.37	-
		6695	149	-	19.08	-	-	16.36	-
		6855	181	-	19.17	-	-	16.37	-

## 10.3 OUTPUT POWER MEASUREMENT

### 10.3.1 E.I.R.P Output Power(Indoor client)

Limit : 24 dBm(e.i.r.p)

(MIMO)

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power + ANT2 Max. Output Power
- EIRP Output Power (dBm) = MIMO Max. Output Power + Directional Gain (dBi)

-Note: The MIMO formula on page 7 and the maximum gain of each band in the antenna gain table were applied.

**10.3.1.1 Ant 1**

Max. Output Power (dBm) = Measured Conducted Power (dBm) + Duty Factor (dB)

EIRP Output Power (dBm) = Max. Output Power + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain [dBi]	Maximum E.I.R.P [dBm]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 26T	UNII5	5935	2	-3.11	-3.51	-3.26	-5.80	-8.91
		6175	45	0.11	-0.23	0.31	-5.80	-5.49
		6415	93	-0.91	-1.37	-1.05	-5.80	-6.71
	UNII6	6435	97	0.45	-0.12	0.20	-6.80	-6.35
		6475	105	-0.03	-0.36	0.00	-6.80	-6.80
		6515	113	-0.12	-0.69	-0.38	-6.80	-6.92
	UNII7	6535	117	-1.08	-1.57	-1.18	-7.40	-8.48
		6695	149	0.54	0.07	0.41	-7.40	-6.86
		6855	181	0.03	-0.39	-0.11	-7.40	-7.37
	UNII8	6875	185	-0.18	-0.64	-0.37	-8.50	-8.68
		6995	209	-0.22	-0.73	-0.45	-8.50	-8.72
		7115	233	-0.34	-0.83	-0.50	-8.50	-8.84

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain [dBi]	Maximum E.I.R.P [dBm]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 52T	UNII5	5935	2	-0.31	-0.54	-0.45	-5.80	-6.11
		6175	45	2.76	2.56	2.88	-5.80	-2.92
		6415	93	3.46	3.21	3.30	-5.80	-2.34
	UNII6	6435	97	3.26	3.07	3.13	-6.80	-3.54
		6475	105	3.00	2.83	3.01	-6.80	-3.79
		6515	113	3.40	3.16	3.22	-6.80	-3.40
	UNII7	6535	117	3.25	3.07	3.20	-7.40	-4.15
		6695	149	3.35	3.10	3.18	-7.40	-4.05
		6855	181	3.02	2.73	2.77	-7.40	-4.38
	UNII8	6875	185	2.72	2.53	2.57	-8.50	-5.78
		6995	209	3.01	2.81	2.91	-8.50	-5.49
		7115	233	2.14	1.89	2.04	-8.50	-6.36

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 106T	UNII5	5935	2	2.78	-	2.69	-5.80	-3.02
		6175	45	5.72	-	5.82	-5.80	0.02
		6415	93	6.38	-	6.28	-5.80	0.58
	UNII6	6435	97	6.32	-	6.20	-6.80	-0.48
		6475	105	6.06	-	6.05	-6.80	-0.74
		6515	113	6.37	-	6.25	-6.80	-0.43
	UNII7	6535	117	6.28	-	6.16	-7.40	-1.12
		6695	149	6.44	-	6.32	-7.40	-0.96
		6855	181	6.12	-	6.00	-7.40	-1.28
	UNII8	6875	185	5.94	-	5.73	-8.50	-2.56
		6995	209	6.12	-	6.02	-8.50	-2.38
		7115	233	5.39	-	5.31	-8.50	-3.11

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 242T	UNII5	5935	2	-	5.58	-	-5.80	-0.22
		6175	45	-	9.07	-	-5.80	3.27
		6415	93	-	9.46	-	-5.80	3.66
	UNII6	6435	97	-	9.31	-	-6.80	2.51
		6475	105	-	9.11	-	-6.80	2.31
		6515	113	-	9.29	-	-6.80	2.49
	UNII7	6535	117	-	9.20	-	-7.40	1.80
		6695	149	-	9.26	-	-7.40	1.86
		6855	181	-	9.33	-	-7.40	1.93
	UNII8	6875	185	-	9.11	-	-8.50	0.61
		6995	209	-	9.04	-	-8.50	0.54
		7115	233	-	8.01	-	-8.50	-0.49

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE20]  SU	UNII5	5935	2	-	9.52	-	-5.80	3.72
		6175	45	-	9.58	-	-5.80	3.78
		6415	93	-	9.20	-	-5.80	3.40
	UNII6	6435	97	-	9.05	-	-6.80	2.25
		6475	105	-	8.81	-	-6.80	2.01
		6515	113	-	9.02	-	-6.80	2.22
	UNII7	6535	117	-	8.93	-	-7.40	1.53
		6695	149	-	9.00	-	-7.40	1.60
		6855	181	-	9.14	-	-7.40	1.74
	UNII8	6875	185	-	8.90	-	-8.50	0.40
		6995	209	-	8.83	-	-8.50	0.33
		7115	233	-	7.81	-	-8.50	-0.69

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40]  26T	UNII5	5965	3	-0.02	-0.54	-0.12	-5.80	-5.82
		6165	43	0.15	0.01	0.37	-5.80	-5.43
		6405	91	0.45	0.08	0.28	-5.80	-5.35
	UNII6	6445	99	0.38	-0.07	0.03	-6.80	-6.42
		6485	107	0.05	-0.12	-0.03	-6.80	-6.75
		6525	115	-0.15	-0.56	-0.46	-6.80	-6.95
	UNII7	6565	123	-1.38	-1.59	-1.46	-7.40	-8.78
		6685	147	0.31	0.08	0.07	-7.40	-7.09
		6845	179	0.02	-0.47	-0.42	-7.40	-7.38
	UNII8	6885	187	-0.11	-0.61	-0.52	-8.50	-8.61
		7005	211	-0.09	-0.55	-0.64	-8.50	-8.59
		7085	227	-0.77	-1.31	-1.28	-8.50	-9.27

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40] 52T	UNII5	5965	3	3.01	2.67	3.14	-5.80	-2.66
		6165	43	2.82	2.74	3.05	-5.80	-2.75
		6405	91	2.60	2.33	2.44	-5.80	-3.20
	UNII6	6445	99	3.58	3.12	3.26	-6.80	-3.22
		6485	107	3.80	3.55	3.63	-6.80	-3.00
		6525	115	3.70	3.27	3.48	-6.80	-3.10
	UNII7	6565	123	3.82	3.48	3.68	-7.40	-3.58
		6685	147	3.68	3.27	3.28	-7.40	-3.72
		6845	179	3.55	3.06	2.99	-7.40	-3.85
	UNII8	6885	187	3.12	2.70	2.72	-8.50	-5.38
		7005	211	3.46	2.99	3.02	-8.50	-5.04
		7085	227	2.51	2.05	2.24	-8.50	-5.99

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40] 106T	UNII5	5965	3	5.62	5.38	5.68	-5.80	-0.12
		6165	43	5.74	5.66	5.98	-5.80	0.18
		6405	91	5.63	5.46	5.50	-5.80	-0.17
	UNII6	6445	99	6.48	6.12	6.16	-6.80	-0.32
		6485	107	6.66	6.50	6.49	-6.80	-0.14
		6525	115	6.57	6.31	6.30	-6.80	-0.23
	UNII7	6565	123	6.65	6.45	6.51	-7.40	-0.75
		6685	147	6.73	6.46	6.42	-7.40	-0.67
		6845	179	6.57	6.30	6.07	-7.40	-0.83
	UNII8	6885	187	6.11	5.85	5.78	-8.50	-2.39
		7005	211	6.35	6.09	6.01	-8.50	-2.15
		7085	227	5.67	5.40	5.37	-8.50	-2.83

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40] 242T	UNII5	5965	3	8.04	-	8.12	-5.80	2.32
		6165	43	9.00	-	9.10	-5.80	3.30
		6405	91	8.45	-	8.35	-5.80	2.65
	UNII6	6445	99	8.86	-	8.63	-6.80	2.06
		6485	107	8.94	-	8.86	-6.80	2.14
		6525	115	8.82	-	8.63	-6.80	2.02
	UNII7	6565	123	9.28	-	9.17	-7.40	1.88
		6685	147	8.84	-	8.63	-7.40	1.44
		6845	179	9.21	-	8.86	-7.40	1.81
	UNII8	6885	187	8.75	-	8.55	-8.50	0.25
		7005	211	8.72	-	8.49	-8.50	0.22
		7085	227	7.68	-	7.49	-8.50	-0.82

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40] 484T	UNII5	5965	3	-	8.16	-	-5.80	2.36
		6165	43	-	9.08	-	-5.80	3.28
		6405	91	-	8.49	-	-5.80	2.69
	UNII6	6445	99	-	8.82	-	-6.80	2.02
		6485	107	-	8.98	-	-6.80	2.18
		6525	115	-	8.77	-	-6.80	1.97
	UNII7	6565	123	-	9.28	-	-7.40	1.88
		6685	147	-	8.83	-	-7.40	1.43
		6845	179	-	9.10	-	-7.40	1.70
	UNII8	6885	187	-	8.71	-	-8.50	0.21
		7005	211	-	8.63	-	-8.50	0.13
		7085	227	-	7.61	-	-8.50	-0.89

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40]  SU	UNII5	5965	3	-	8.44	-	-5.80	2.64
		6165	43	-	9.58	-	-5.80	3.78
		6405	91	-	9.22	-	-5.80	3.42
	UNII6	6445	99	-	8.97	-	-6.80	2.17
		6485	107	-	9.17	-	-6.80	2.37
		6525	115	-	8.99	-	-6.80	2.19
	UNII7	6565	123	-	9.35	-	-7.40	1.95
		6685	147	-	9.05	-	-7.40	1.65
		6845	179	-	9.26	-	-7.40	1.86
	UNII8	6885	187	-	8.83	-	-8.50	0.33
		7005	211	-	8.75	-	-8.50	0.25
		7085	227	-	7.84	-	-8.50	-0.66

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80]  26T	UNII5	5985	7	-0.06	-0.32	0.05	-5.80	-5.75
		6145	39	0.20	-0.13	0.28	-5.80	-5.52
		6385	87	0.28	0.04	0.30	-5.80	-5.50
	UNII6	6465	103	0.38	-0.17	0.11	-6.80	-6.42
		6545	119	0.02	-0.62	-0.50	-6.80	-6.78
		6625	135	-0.64	-1.32	-1.17	-7.40	-8.04
	UNII7	6705	151	0.32	-0.26	-0.25	-7.40	-7.08
		6785	167	0.04	-0.39	-0.23	-7.40	-7.36
		6865	183	0.27	-0.37	-0.46	-8.50	-8.23
	UNII8	6945	199	0.49	-0.41	-0.73	-8.50	-8.01
		7025	215	0.13	-0.64	-1.29	-8.50	-8.37

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE80] 52T	UNII5	5985	7	3.05	3.14	3.38	-5.80	-2.42
		6145	39	2.90	2.68	3.12	-5.80	-2.68
		6385	87	3.67	3.39	3.52	-5.80	-2.13
	UNII6	6465	103	3.58	3.11	3.24	-6.80	-3.22
		6545	119	3.14	2.53	2.59	-6.80	-3.66
	UNII7	6625	135	2.64	1.88	2.07	-7.40	-4.76
		6705	151	3.57	2.89	2.85	-7.40	-3.83
		6785	167	3.60	3.17	3.22	-7.40	-3.80
	UNII8	6865	183	3.61	2.78	2.77	-8.50	-4.89
		6945	199	3.84	2.90	2.69	-8.50	-4.66
		7025	215	3.52	2.70	2.31	-8.50	-4.98

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE80] 106T	UNII5	5985	7	5.64	5.65	5.94	-5.80	0.14
		6145	39	5.77	5.66	6.12	-5.80	0.32
		6385	87	5.47	5.26	5.33	-5.80	-0.33
	UNII6	6465	103	6.55	6.06	6.14	-6.80	-0.25
		6545	119	5.99	5.30	5.51	-6.80	-0.81
	UNII7	6625	135	5.67	5.07	5.11	-7.40	-1.73
		6705	151	6.73	6.06	5.98	-7.40	-0.67
		6785	167	6.76	6.24	6.29	-7.40	-0.64
	UNII8	6865	183	6.64	5.80	5.75	-8.50	-1.86
		6945	199	6.90	6.01	5.76	-8.50	-1.60
		7025	215	6.48	5.66	5.32	-8.50	-2.02

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE80] 242T	UNII5	5985	7	8.23	8.10	8.63	-5.80	2.83
		6145	39	9.11	8.92	9.26	-5.80	3.46
		6385	87	8.47	8.27	8.30	-5.80	2.67
	UNII6	6465	103	9.04	8.72	8.71	-6.80	2.24
		6545	119	9.03	8.70	8.67	-6.80	2.23
	UNII7	6625	135	9.39	9.01	8.82	-7.40	1.99
		6705	151	9.01	8.69	8.31	-7.40	1.61
		6785	167	9.45	9.14	8.92	-7.40	2.05
	UNII8	6865	183	9.17	8.77	8.58	-8.50	0.67
		6945	199	9.26	8.80	8.35	-8.50	0.76
		7025	215	8.80	8.43	7.90	-8.50	0.30

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE80] 484T	UNII5	5985	7	8.17	-	8.50	-5.80	2.70
		6145	39	8.97	-	9.08	-5.80	3.28
		6385	87	8.27	-	8.18	-5.80	2.47
	UNII6	6465	103	8.86	-	8.59	-6.80	2.06
		6545	119	8.85	-	8.59	-6.80	2.05
	UNII7	6625	135	9.12		8.71	-7.40	1.72
		6705	151	8.76	-	8.35	-7.40	1.36
		6785	167	9.21		8.95	-7.40	1.81
	UNII8	6865	183	9.06	-	8.63	-8.50	0.56
		6945	199	9.10	-	8.42	-8.50	0.60
		7025	215	8.63	-	7.95	-8.50	0.13

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE80] 996T	UNII5	5985	7	-	8.28	-	-5.80	2.48
		6145	39	-	9.06	-	-5.80	3.26
		6385	87	-	8.21	-	-5.80	2.41
	UNII6	6465	103	-	8.74	-	-6.80	1.94
		6545	119	-	8.74	-	-6.80	1.94
	UNII7	6625	135		8.95		-7.40	1.55
		6705	151	-	8.57	-	-7.40	1.17
		6785	167		9.10		-7.40	1.70
	UNII8	6865	183	-	8.85	-	-8.50	0.35
		6945	199	-	8.76	-	-8.50	0.26
		7025	215	-	8.28	-	-8.50	-0.22

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE80] SU	UNII5	5985	7	-	8.78	-	-5.80	2.98
		6145	39	-	9.75	-	-5.80	3.95
		6385	87	-	9.29	-	-5.80	3.49
	UNII6	6465	103	-	9.07	-	-6.80	2.27
		6545	119	-	9.53	-	-6.80	2.73
	UNII7	6625	135		9.25		-7.40	1.85
		6705	151	-	8.68	-	-7.40	1.28
		6785	167		9.07		-7.40	1.67
	UNII8	6865	183	-	8.97	-	-8.50	0.47
		6945	199	-	8.99	-	-8.50	0.49
		7025	215	-	8.66	-	-8.50	0.16

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 26T	UNII5	6025	15	-0.72	-0.65	-0.62	-5.80	-6.42
		6185	47	0.22	0.13	0.15	-5.80	-5.58
		6345	79	0.59	0.65	0.22	-5.80	-5.15
	UNII6	6505	111	0.43	0.06	-0.09	-6.80	-6.37
	UNII7	6665	143	-0.23	-0.72	-0.79	-7.40	-7.63
	UNII8	6825	175	0.52	0.20	-0.14	-8.50	-7.98
		6985	207	0.38	-0.38	-1.21	-8.50	-8.12

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 52T	UNII5	6025	15	2.36	2.53	2.88	-5.80	-2.92
		6185	47	3.12	3.29	3.32	-5.80	-2.48
		6345	79	2.52	2.52	2.07	-5.80	-3.28
	UNII6	6505	111	2.82	2.43	2.06	-6.80	-3.98
	UNII7	6665	143	3.03	2.72	2.33	-7.40	-4.37
	UNII8	6825	175	2.92	2.53	2.12	-8.50	-5.58
		6985	207	3.34	2.44	1.75	-8.50	-5.16

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 106T	UNII5	6025	15	5.14	5.53	5.62	-5.80	-0.18
		6185	47	6.04	5.94	6.10	-5.80	0.30
		6345	79	5.50	5.43	5.10	-5.80	-0.30
	UNII6	6505	111	5.85	5.36	5.11	-6.80	-0.95
	UNII7	6665	143	6.04	5.45	5.31	-7.40	-1.36
	UNII8	6825	175	5.73	5.29	4.89	-8.50	-2.77
		6985	207	6.34	5.43	4.79	-8.50	-2.16

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 242T	UNII5	6025	15	7.78	7.81	8.23	-5.80	2.43
		6185	47	8.88	8.86	8.80	-5.80	3.08
		6345	79	8.60	8.56	8.00	-5.80	2.80
	UNII6	6505	111	8.82	8.56	8.11	-6.80	2.02
	UNII7	6665	143	9.10	8.94	8.40	-7.40	1.70
	UNII8	6825	175	9.02	8.94	8.31	-8.50	0.52
		6985	207	9.37	8.93	7.93	-8.50	0.87

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 484T	UNII5	6025	15	7.73	-	8.10	-5.80	2.30
		6185	47	8.79	-	8.70	-5.80	2.99
		6345	79	8.53	-	8.18	-5.80	2.73
	UNII6	6505	111	9.08	-	8.55	-6.80	2.28
	UNII7	6665	143	8.96	-	8.44	-7.40	1.56
	UNII8	6825	175	8.96	-	8.37	-8.50	0.46
		6985	207	9.06	-	8.08	-8.50	0.56

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 996T	UNII5	6025	15	-	7.82	-	-5.80	2.02
		6185	47	-	8.66	-	-5.80	2.86
		6345	79	-	8.27	-	-5.80	2.47
	UNII6	6505	111	-	8.79	-	-6.80	1.99
	UNII7	6665	143	-	9.12	-	-7.40	1.72
	UNII8	6825	175	-	9.05	-	-8.50	0.55
		6985	207	-	8.86	-	-8.50	0.36

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 26T	UNII5	6025	15	-0.30	-0.23	0.15	-5.80	-5.65
		6185	47	0.31	0.66	0.53	-5.80	-5.14
		6345	79	0.33	0.37	0.10	-5.80	-5.43
	UNII6	6505	111	-0.38	-0.24	-0.28	-6.80	-7.04
	UNII7	6665	143	-0.94	-1.07	-1.56	-7.40	-8.34
	UNII8	6825	175	-0.19	-0.49	-0.83	-8.50	-8.69
		6985	207	-1.37	-1.83	-2.39	-8.50	-9.87

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 52T	UNII5	6025	15	2.93	3.39	3.91	-5.80	-1.89
		6185	47	3.42	3.71	3.72	-5.80	-2.08
		6345	79	1.97	2.04	1.64	-5.80	-3.76
	UNII6	6505	111	2.18	2.01	1.81	-6.80	-4.62
	UNII7	6665	143	2.43	2.19	1.72	-7.40	-4.97
	UNII8	6825	175	1.96	1.45	0.99	-8.50	-6.54
		6985	207	1.63	1.30	0.84	-8.50	-6.87

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 106T	UNII5	6025	15	5.78	6.30	6.76	-5.80	0.96
		6185	47	6.28	6.65	6.60	-5.80	0.85
		6345	79	4.87	4.85	4.62	-5.80	-0.93
	UNII6	6505	111	5.01	4.99	4.79	-6.80	-1.79
	UNII7	6665	143	5.32	5.09	4.72	-7.40	-2.08
	UNII8	6825	175	4.78	4.26	3.85	-8.50	-3.72
		6985	207	4.65	4.38	3.97	-8.50	-3.85

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 242T	UNII5	6025	15	8.48	8.49	9.28	-5.80	3.48
		6185	47	9.11	9.23	9.32	-5.80	3.52
		6345	79	7.88	7.82	7.71	-5.80	2.08
	UNII6	6505	111	7.89	7.90	7.86	-6.80	1.10
	UNII7	6665	143	8.35	8.25	7.93	-7.40	0.95
	UNII8	6825	175	7.96	7.68	7.28	-8.50	-0.54
		6985	207	7.66	7.61	7.01	-8.50	-0.84

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 484T	UNII5	6025	15	8.47	-	9.05	-5.80	3.25
		6185	47	9.12	-	9.25	-5.80	3.45
		6345	79	7.77	-	7.68	-5.80	1.97
	UNII6	6505	111	7.84	-	7.80	-6.80	1.04
	UNII7	6665	143	8.19	-	7.92	-7.40	0.79
	UNII8	6825	175	7.77	-	7.31	-8.50	-0.73
		6985	207	7.52	-	7.10	-8.50	-0.98

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 996T	UNII5	6025	15	-	8.73	-	-5.80	2.93
		6185	47	-	9.12	-	-5.80	3.32
		6345	79	-	7.63	-	-5.80	1.83
	UNII6	6505	111	-	8.23	-	-6.80	1.43
	UNII7	6665	143	-	8.60	-	-7.40	1.20
	UNII8	6825	175	-	8.02	-	-8.50	-0.48
		6985	207	-	7.69	-	-8.50	-0.81

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE160] 996*2T	UNII5	6025	15	-	7.96	-	-5.80	2.16
		6185	47	-	8.52	-	-5.80	2.72
		6345	79	-	8.17	-	-5.80	2.37
	UNII6	6505	111	-	8.25	-	-6.80	1.45
	UNII7	6665	143	-	8.62	-	-7.40	1.22
	UNII8	6825	175	-	8.24	-	-8.50	-0.26
		6985	207	-	8.00	-	-8.50	-0.50

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE160] SU	UNII5	6025	15	-	8.75	-	-5.80	2.95
		6185	47	-	9.29	-	-5.80	3.49
		6345	79	-	9.19	-	-5.80	3.39
	UNII6	6505	111	-	9.07	-	-6.80	2.27
	UNII7	6665	143	-	9.34	-	-7.40	1.94
	UNII8	6825	175	-	8.99	-	-8.50	0.49
		6985	207	-	8.89	-	-8.50	0.39

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
802.11a	UNII5	5935	2	-	9.50	-	-5.80	3.70
		6175	45	-	9.51	-	-5.80	3.71
		6415	93	-	9.03	-	-5.80	3.23
	UNII6	6435	97	-	8.95	-	-6.80	2.15
		6475	105	-	8.68	-	-6.80	1.88
		6515	113	-	8.88	-	-6.80	2.08
	UNII7	6535	117	-	8.77	-	-7.40	1.37
		6695	149	-	8.87	-	-7.40	1.47
		6855	181	-	8.97	-	-7.40	1.57
	UNII8	6875	185	-	8.74	-	-8.50	0.24
		6995	209	-	8.68	-	-8.50	0.18
		7115	233	-	7.71	-	-8.50	-0.79

### 10.3.1.2 Ant 2

Max. Output Power (dBm) = Measured Conducted Power (dBm) + Duty Factor (dB)

EIRP Output Power (dBm) = Max. Output Power + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE20] 26T	UNII5	5935	2	-3.93	-4.43	-4.13	-7.20	-11.13
		6175	45	-1.47	-1.77	-1.25	-7.20	-8.45
		6415	93	-1.38	-1.88	-1.63	-7.20	-8.58
	UNII6	6435	97	-0.18	-0.70	-0.44	-6.30	-6.48
		6475	105	0.18	-0.21	0.27	-6.30	-6.03
		6515	113	0.05	-0.50	-0.22	-6.30	-6.25
	UNII7	6535	117	0.22	-0.26	0.01	-7.40	-7.18
		6695	149	0.94	0.47	0.76	-7.40	-6.46
		6855	181	0.50	-0.03	0.38	-7.40	-6.90
	UNII8	6875	185	0.38	-0.05	0.40	-7.90	-7.50
		6995	209	-0.29	-0.66	-0.21	-7.90	-8.11
		7115	233	0.21	-0.15	0.29	-7.90	-7.61

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE20] 52T	UNII5	5935	2	-0.97	-1.24	-1.18	-7.20	-8.17
		6175	45	2.11	1.93	2.27	-7.20	-4.93
		6415	93	3.80	3.57	3.66	-7.20	-3.40
	UNII6	6435	97	3.03	2.74	2.79	-6.30	-3.27
		6475	105	2.82	2.58	2.88	-6.30	-3.42
		6515	113	2.99	2.84	2.76	-6.30	-3.31
	UNII7	6535	117	2.72	2.50	2.50	-7.40	-4.68
		6695	149	2.85	2.62	2.74	-7.40	-4.55
		6855	181	2.47	2.22	2.46	-7.40	-4.93
	UNII8	6875	185	2.51	2.29	2.49	-7.90	-5.39
		6995	209	2.49	2.34	2.52	-7.90	-5.38
		7115	233	2.66	2.50	2.66	-7.90	-5.24

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 106T	UNII5	5935	2	1.56	-	1.31	-7.20	-5.64
		6175	45	5.40	-	5.52	-7.20	-1.68
		6415	93	6.95	-	6.83	-7.20	-0.25
	UNII6	6435	97	6.23	-	6.10	-6.30	-0.07
		6475	105	6.05	-	6.08	-6.30	-0.22
		6515	113	6.04	-	5.86	-6.30	-0.26
	UNII7	6535	117	5.74	-	5.62	-7.40	-1.66
		6695	149	5.40	-	5.32	-7.40	-2.00
		6855	181	5.72	-	5.75	-7.40	-1.65
	UNII8	6875	185	5.83	-	5.81	-7.90	-2.07
		6995	209	5.69	-	5.74	-7.90	-2.16
		7115	233	5.49	-	5.47	-7.90	-2.41

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 242T	UNII5	5935	2	-	4.34	-	-7.20	-2.86
		6175	45	-	8.15	-	-7.20	0.95
		6415	93	-	9.87	-	-7.20	2.67
	UNII6	6435	97	-	8.95	-	-6.30	2.65
		6475	105	-	8.84	-	-6.30	2.54
		6515	113	-	8.96	-	-6.30	2.66
	UNII7	6535	117	-	8.73	-	-7.40	1.33
		6695	149	-	8.66	-	-7.40	1.26
		6855	181	-	8.47	-	-7.40	1.07
	UNII8	6875	185	-	8.56	-	-7.90	0.66
		6995	209	-	8.53	-	-7.90	0.63
		7115	233	-	8.59	-	-7.90	0.69

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE20]  SU	UNII5	5935	2	-	8.53	-	-7.20	1.33
		6175	45	-	8.85	-	-7.20	1.65
		6415	93	-	9.58	-	-7.20	2.38
	UNII6	6435	97	-	8.68	-	-6.30	2.38
		6475	105	-	8.47	-	-6.30	2.17
		6515	113	-	8.70	-	-6.30	2.40
	UNII7	6535	117	-	8.48	-	-7.40	1.08
		6695	149	-	8.39	-	-7.40	0.99
		6855	181	-	8.25	-	-7.40	0.85
	UNII8	6875	185	-	8.31	-	-7.90	0.41
		6995	209	-	8.26	-	-7.90	0.36
		7115	233	-	8.32	-	-7.90	0.42

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE40]  26T	UNII5	5965	3	-0.86	-1.21	-0.75	-7.20	-7.95
		6165	43	-0.88	-1.01	-0.53	-7.20	-7.73
		6405	91	0.71	0.35	0.38	-7.20	-6.49
	UNII6	6445	99	-0.17	-0.69	-0.55	-6.30	-6.47
		6485	107	-0.62	-0.77	-0.67	-6.30	-6.92
		6525	115	0.17	-0.46	-0.35	-6.30	-6.13
	UNII7	6565	123	0.06	-0.26	-0.12	-7.40	-7.34
		6685	147	0.59	0.27	0.35	-7.40	-6.81
		6845	179	0.28	-0.21	-0.06	-7.40	-7.12
	UNII8	6885	187	0.41	0.24	0.42	-7.90	-7.48
		7005	211	-0.17	-0.39	-0.21	-7.90	-8.07
		7085	227	-0.20	-0.50	-0.11	-7.90	-8.01

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE40] 52T	UNII5	5965	3	2.83	2.59	2.94	-7.20	-4.26
		6165	43	2.15	2.01	2.35	-7.20	-4.85
		6405	91	2.97	2.80	2.83	-7.20	-4.23
	UNII6	6445	99	3.25	2.73	2.93	-6.30	-3.05
		6485	107	3.20	3.10	3.21	-6.30	-3.09
		6525	115	3.24	2.75	2.74	-6.30	-3.06
	UNII7	6565	123	2.82	2.61	2.83	-7.40	-4.57
		6685	147	2.94	2.71	2.79	-7.40	-4.46
		6845	179	2.77	2.43	2.60	-7.40	-4.63
	UNII8	6885	187	2.79	2.56	2.74	-7.90	-5.11
		7005	211	2.88	2.64	2.79	-7.90	-5.02
		7085	227	2.40	2.20	2.37	-7.90	-5.50

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE40] 106T	UNII5	5965	3	5.97	5.74	6.06	-7.20	-1.14
		6165	43	5.48	5.37	5.66	-7.20	-1.54
		6405	91	6.13	5.98	6.00	-7.20	-1.07
	UNII6	6445	99	6.36	6.06	6.07	-6.30	0.06
		6485	107	6.21	6.09	6.20	-6.30	-0.09
		6525	115	6.18	5.82	5.71	-6.30	-0.12
	UNII7	6565	123	5.81	5.64	5.83	-7.40	-1.57
		6685	147	5.51	5.35	5.36	-7.40	-1.89
		6845	179	6.00	5.74	5.82	-7.40	-1.40
	UNII8	6885	187	5.98	5.86	5.99	-7.90	-1.91
		7005	211	5.85	5.73	5.78	-7.90	-2.05
		7085	227	5.50	5.35	5.45	-7.90	-2.40

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40] 242T	UNII5	5965	3	8.21	-	8.27	-7.20	1.07
		6165	43	8.03	-	8.14	-7.20	0.94
		6405	91	8.97	-	8.85	-7.20	1.77
	UNII6	6445	99	8.44	-	8.20	-6.30	2.14
		6485	107	8.70	-	8.69	-6.30	2.40
		6525	115	8.59	-	8.27	-6.30	2.29
	UNII7	6565	123	8.30	-	8.28	-7.40	0.90
		6685	147	8.28	-	8.18	-7.40	0.88
		6845	179	8.15	-	8.03	-7.40	0.75
	UNII8	6885	187	8.21	-	8.20	-7.90	0.31
		7005	211	8.24	-	8.18	-7.90	0.34
		7085	227	7.84	-	7.82	-7.90	-0.06

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40] 484T	UNII5	5965	3	-	8.32	-	-7.20	1.12
		6165	43	-	8.18	-	-7.20	0.98
		6405	91	-	8.97	-	-7.20	1.77
	UNII6	6445	99	-	8.41	-	-6.30	2.11
		6485	107	-	8.80	-	-6.30	2.50
		6525	115	-	8.51	-	-6.30	2.21
	UNII7	6565	123	-	8.36	-	-7.40	0.96
		6685	147	-	8.34	-	-7.40	0.94
		6845	179	-	8.13	-	-7.40	0.73
	UNII8	6885	187	-	8.26	-	-7.90	0.36
		7005	211	-	8.21	-	-7.90	0.31
		7085	227	-	7.87	-	-7.90	-0.03

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE40] SU	UNII5	5965	3	-	8.42	-	-7.20	1.22
		6165	43	-	8.77	-	-7.20	1.57
		6405	91	-	9.57	-	-7.20	2.37
	UNII6	6445	99	-	8.57	-	-6.30	2.27
		6485	107	-	8.83	-	-6.30	2.53
		6525	115	-	8.61	-	-6.30	2.31
	UNII7	6565	123	-	8.44	-	-7.40	1.04
		6685	147	-	8.38	-	-7.40	0.98
		6845	179	-	8.32	-	-7.40	0.92
	UNII8	6885	187	-	8.38	-	-7.90	0.48
		7005	211	-	8.38	-	-7.90	0.48
		7085	227	-	7.99	-	-7.90	0.09

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] 26T	UNII5	5985	7	-0.73	-0.69	-0.49	-7.20	-7.69
		6145	39	-0.57	-0.98	-0.33	-7.20	-7.53
		6385	87	0.61	0.50	0.57	-7.20	-6.59
	UNII6	6465	103	-0.19	-0.64	-0.44	-6.30	-6.49
		6545	119	0.20	-0.66	-0.43	-6.30	-6.10
		6625	135	0.47	-0.48	-0.37	-7.40	-6.93
	UNII7	6705	151	0.73	0.13	-0.21	-7.40	-6.67
		6785	167	0.11	-0.10	0.04	-7.40	-7.29
		6865	183	0.75	0.24	0.59	-7.90	-7.15
	UNII8	6945	199	0.54	-0.02	0.42	-7.90	-7.36
		7025	215	0.06	-0.15	-0.02	-7.90	-7.84

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80] 52T	UNII5	5985	7	3.09	3.08	3.21	-7.20	-3.99
		6145	39	2.58	2.15	2.50	-7.20	-4.62
		6385	87	3.96	3.86	3.84	-7.20	-3.24
	UNII6	6465	103	3.27	2.80	3.11	-6.30	-3.03
		6545	119	2.33	1.61	1.78	-6.30	-3.97
	UNII7	6625	135	2.64	1.75	1.73	-7.40	-4.76
		6705	151	2.88	2.38	2.37	-7.40	-4.52
		6785	167	2.78	2.72	2.94	-7.40	-4.46
	UNII8	6865	183	2.76	2.48	2.85	-7.90	-5.05
		6945	199	3.11	2.65	2.95	-7.90	-4.79
		7025	215	3.27	2.86	3.08	-7.90	-4.63

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80] 106T	UNII5	5985	7	6.02	6.02	6.18	-7.20	-1.02
		6145	39	5.68	5.30	5.61	-7.20	-1.52
		6385	87	5.78	5.63	5.68	-7.20	-1.42
	UNII6	6465	103	6.40	5.94	6.14	-6.30	0.10
		6545	119	5.51	4.71	4.91	-6.30	-0.79
	UNII7	6625	135	5.84	5.07	5.14	-7.40	-1.56
		6705	151	5.40	4.97	4.86	-7.40	-2.00
		6785	167	5.98	5.90	6.02	-7.40	-1.38
	UNII8	6865	183	6.01	5.67	5.97	-7.90	-1.89
		6945	199	6.19	5.71	6.01	-7.90	-1.71
		7025	215	6.42	6.00	6.09	-7.90	-1.48

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80] 242T	UNII5	5985	7	8.36	8.34	8.62	-7.20	1.42
		6145	39	8.33	8.03	8.22	-7.20	1.13
		6385	87	8.65	8.55	8.66	-7.20	1.46
	UNII6	6465	103	8.56	8.30	8.52	-6.30	2.26
		6545	119	8.37	7.87	7.84	-6.30	2.07
	UNII7	6625	135	9.14	8.71	8.39	-7.40	1.74
		6705	151	8.34	8.09	7.77	-7.40	0.94
		6785	167	8.22	8.13	8.20	-7.40	0.82
	UNII8	6865	183	8.11	7.84	8.17	-7.90	0.27
		6945	199	8.52	8.23	8.37	-7.90	0.62
		7025	215	8.66	8.47	8.33	-7.90	0.76

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80] 484T	UNII5	5985	7	8.32	-	8.55	-7.20	1.35
		6145	39	8.12	-	8.05	-7.20	0.92
		6385	87	8.57	-	8.60	-7.20	1.40
	UNII6	6465	103	8.39	-	8.33	-6.30	2.09
		6545	119	8.07	-	7.75	-6.30	1.77
	UNII7	6625	135	8.89		8.37	-7.40	1.49
		6705	151	8.21	-	7.80	-7.40	0.81
		6785	167	8.15		8.22	-7.40	0.82
	UNII8	6865	183	8.05	-	8.13	-7.90	0.23
		6945	199	8.44	-	8.25	-7.90	0.54
		7025	215	8.53	-	8.28	-7.90	0.63

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80] 996T	UNII5	5985	7	-	8.43	-	-7.20	1.23
		6145	39	-	8.12	-	-7.20	0.92
		6385	87	-	8.56	-	-7.20	1.36
	UNII6	6465	103	-	8.39	-	-6.30	2.09
		6545	119	-	7.89	-	-6.30	1.59
	UNII7	6625	135		8.66		-7.40	1.26
		6705	151	-	8.01	-	-7.40	0.61
		6785	167		8.21		-7.40	0.81
	UNII8	6865	183	-	8.13	-	-7.90	0.23
		6945	199	-	8.35	-	-7.90	0.45
		7025	215	-	8.42	-	-7.90	0.52

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80] SU	UNII5	5985	7	-	8.61	-	-7.20	1.41
		6145	39	-	8.84	-	-7.20	1.64
		6385	87	-	9.43	-	-7.20	2.23
	UNII6	6465	103	-	8.56	-	-6.30	2.26
		6545	119	-	8.53	-	-6.30	2.23
	UNII7	6625	135		8.86		-7.40	1.46
		6705	151	-	8.01	-	-7.40	0.61
		6785	167		8.27		-7.40	0.87
	UNII8	6865	183	-	8.19	-	-7.90	0.29
		6945	199	-	8.48	-	-7.90	0.58
		7025	215	-	8.63	-	-7.90	0.73

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80L] 26T	UNII5	6025	15	-1.26	-1.04	-0.97	-7.20	-8.17
		6185	47	-1.48	-1.80	-1.43	-7.20	-8.63
		6345	79	0.06	0.02	-0.51	-7.20	-7.14
	UNII6	6505	111	0.69	0.05	-0.13	-6.30	-5.61
	UNII7	6665	143	0.24	-0.20	-0.84	-7.40	-7.16
	UNII8	6825	175	0.63	0.65	-0.01	-7.90	-7.25
		6985	207	-0.92	-1.43	-1.70	-7.90	-8.82

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80L] 52T	UNII5	6025	15	2.51	2.79	2.75	-7.20	-4.41
		6185	47	2.80	2.45	2.69	-7.20	-4.40
		6345	79	2.99	3.15	2.47	-7.20	-4.05
	UNII6	6505	111	2.44	1.97	1.64	-6.30	-3.86
	UNII7	6665	143	2.08	1.59	1.25	-7.40	-5.32
	UNII8	6825	175	2.03	1.85	1.50	-7.90	-5.87
		6985	207	1.63	1.09	0.92	-7.90	-6.27

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE80L] 106T	UNII5	6025	15	5.47	5.56	5.67	-7.20	-1.53
		6185	47	6.08	5.66	5.65	-7.20	-1.12
		6345	79	6.16	6.05	5.50	-7.20	-1.04
	UNII6	6505	111	5.54	4.95	4.90	-6.30	-0.76
	UNII7	6665	143	5.29	4.68	4.42	-7.40	-2.11
	UNII8	6825	175	5.24	5.17	4.85	-7.90	-2.66
		6985	207	4.88	4.37	4.08	-7.90	-3.02

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 242T	UNII5	6025	15	8.14	8.32	8.45	-7.20	1.25
		6185	47	8.44	8.25	8.00	-7.20	1.24
		6345	79	9.12	9.13	8.62	-7.20	1.93
	UNII6	6505	111	8.39	8.11	7.81	-6.30	2.09
	UNII7	6665	143	8.23	7.88	7.20	-7.40	0.83
	UNII8	6825	175	7.96	7.94	7.58	-7.90	0.06
		6985	207	7.71	7.44	7.06	-7.90	-0.19

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 484T	UNII5	6025	15	8.20	-	8.45	-7.20	1.25
		6185	47	8.34	-	7.97	-7.20	1.14
		6345	79	9.14	-	8.78	-7.20	1.94
	UNII6	6505	111	8.24	-	7.87	-6.30	1.94
	UNII7	6665	143	7.99	-	7.24	-7.40	0.59
	UNII8	6825	175	7.97	-	7.65	-7.90	0.07
		6985	207	7.56	-	7.03	-7.90	-0.34

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 996T	UNII5	6025	15	-	8.28	-	-7.20	1.08
		6185	47	-	8.11	-	-7.20	0.91
		6345	79	-	8.91	-	-7.20	1.71
	UNII6	6505	111	-	8.54	-	-6.30	2.24
	UNII7	6665	143	-	8.13	-	-7.40	0.73
	UNII8	6825	175	-	8.24	-	-7.90	0.34
		6985	207	-	7.76	-	-7.90	-0.14

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 26T	UNII5	6025	15	-0.77	-0.87	-0.03	-7.20	-7.23
		6185	47	-1.44	-1.12	-1.06	-7.20	-8.26
		6345	79	-0.49	-0.32	-0.38	-7.20	-7.52
	UNII6	6505	111	-0.07	-0.42	-0.41	-6.30	-6.37
	UNII7	6665	143	-0.58	-0.80	-1.26	-7.40	-7.98
	UNII8	6825	175	0.28	-0.17	-0.15	-7.90	-7.62
		6985	207	-1.64	-1.41	-1.16	-7.90	-9.06

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 52T	UNII5	6025	15	2.82	3.09	3.47	-7.20	-3.73
		6185	47	2.67	2.92	2.63	-7.20	-4.28
		6345	79	2.60	2.64	2.20	-7.20	-4.56
	UNII6	6505	111	1.69	1.47	1.50	-6.30	-4.61
	UNII7	6665	143	1.26	1.25	0.97	-7.40	-6.14
	UNII8	6825	175	1.53	1.53	1.34	-7.90	-6.37
		6985	207	0.93	0.98	0.97	-7.90	-6.92

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 106T	UNII5	6025	15	5.55	5.81	6.33	-7.20	-0.87
		6185	47	5.81	5.92	5.79	-7.20	-1.28
		6345	79	5.51	5.71	5.47	-7.20	-1.49
	UNII6	6505	111	4.68	4.44	4.52	-6.30	-1.62
	UNII7	6665	143	4.36	4.39	4.01	-7.40	-3.01
	UNII8	6825	175	4.71	4.61	4.58	-7.90	-3.19
		6985	207	4.14	4.23	4.31	-7.90	-3.59

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 242T	UNII5	6025	15	8.29	8.37	9.07	-7.20	1.87
		6185	47	8.27	8.35	8.25	-7.20	1.15
		6345	79	8.39	8.41	8.41	-7.20	1.21
	UNII6	6505	111	7.49	7.35	7.38	-6.30	1.19
	UNII7	6665	143	7.21	7.25	6.96	-7.40	-0.15
	UNII8	6825	175	7.28	7.25	7.32	-7.90	-0.58
		6985	207	7.06	7.09	7.16	-7.90	-0.74

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 484T	UNII5	6025	15	8.43	-	9.00	-7.20	1.80
		6185	47	8.28	-	8.33	-7.20	1.13
		6345	79	8.32	-	8.46	-7.20	1.26
	UNII6	6505	111	7.37	-	7.41	-6.30	1.11
	UNII7	6665	143	7.19	-	7.04	-7.40	-0.21
	UNII8	6825	175	7.31	-	7.36	-7.90	-0.54
		6985	207	7.02	-	7.06	-7.90	-0.84

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 996T	UNII5	6025	15	-	8.69	-	-7.20	1.49
		6185	47	-	8.22	-	-7.20	1.02
		6345	79	-	8.38	-	-7.20	1.18
	UNII6	6505	111	-	7.92	-	-6.30	1.62
	UNII7	6665	143	-	7.64	-	-7.40	0.24
	UNII8	6825	175	-	7.77	-	-7.90	-0.13
		6985	207	-	7.50	-	-7.90	-0.40

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE160] 996*2T	UNII5	6025	15	-	8.46	-	-7.20	1.26
		6185	47	-	8.14	-	-7.20	0.94
		6345	79	-	9.04	-	-7.20	1.84
	UNII6	6505	111	-	8.20	-	-6.30	1.90
	UNII7	6665	143	-	7.94	-	-7.40	0.54
	UNII8	6825	175	-	8.08	-	-7.90	0.18
		6985	207	-	7.70	-	-7.90	-0.20

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE160] SU	UNII5	6025	15	-	8.85	-	-7.20	1.65
		6185	47	-	8.57	-	-7.20	1.37
		6345	79	-	9.57	-	-7.20	2.37
	UNII6	6505	111	-	8.64	-	-6.30	2.34
	UNII7	6665	143	-	8.36	-	-7.40	0.96
	UNII8	6825	175	-	8.51	-	-7.90	0.61
		6985	207	-	8.06	-	-7.90	0.16

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Peak Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
802.11a	UNII5	5935	2	-	8.07	-	-7.20	0.87
		6175	45	-	8.68	-	-7.20	1.48
		6415	93	-	9.34	-	-7.20	2.14
	UNII6	6435	97	-	8.52	-	-6.30	2.22
		6475	105	-	8.34	-	-6.30	2.04
		6515	113	-	8.51	-	-6.30	2.21
	UNII7	6535	117	-	8.26	-	-7.40	0.86
		6695	149	-	8.16	-	-7.40	0.76
		6855	181	-	8.03	-	-7.40	0.63
	UNII8	6875	185	-	8.16	-	-7.90	0.26
		6995	209	-	8.01	-	-7.90	0.11
		7115	233	-	8.12	-	-7.90	0.22

### 10.3.1.3 SUM (MIMO)

Max. Output Power (dBm) = ANT1 Max. Output Power + ANT2 Max. Output Power

EIRP Output Power (dBm) = MIMO Max. Output Power + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-3.11	-3.93	-0.49	-3.51	-4.43	-0.93	-3.26	-4.13	-0.66	-3.46	-3.95
		6175	45	0.11	-1.47	2.40	-0.23	-1.77	2.08	0.31	-1.25	2.61	-3.46	-0.85
		6415	93	-0.91	-1.38	1.87	-1.37	-1.88	1.39	-1.05	-1.63	1.68	-3.46	-1.59
	UNII6	6435	97	0.45	-0.18	3.16	-0.12	-0.70	2.61	0.20	-0.44	2.90	-3.54	-0.38
		6475	105	-0.03	0.18	3.08	-0.36	-0.21	2.73	0.00	0.27	3.15	-3.54	-0.39
		6515	113	-0.12	0.05	2.97	-0.69	-0.50	2.42	-0.38	-0.22	2.71	-3.54	-0.56
	26T	6535	117	-1.08	0.22	2.63	-1.57	-0.26	2.14	-1.18	0.01	2.46	-4.39	-1.76
		6695	149	0.54	0.94	3.75	0.07	0.47	3.28	0.41	0.76	3.60	-4.39	-0.64
		6855	181	0.03	0.50	3.28	-0.39	-0.03	2.80	-0.11	0.38	3.15	-4.39	-1.11
		6875	185	-0.18	0.38	3.12	-0.64	-0.05	2.67	-0.37	0.40	3.04	-5.18	-2.06
		6995	209	-0.22	-0.29	2.76	-0.73	-0.66	2.31	-0.45	-0.21	2.68	-5.18	-2.43
	7115	233	-0.34	0.21	2.96	-0.83	-0.15	2.53	-0.50	0.29	2.92	-5.18	-2.23	

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-0.31	-0.97	2.38	-0.54	-1.24	2.14	-0.45	-1.18	2.21	-3.46	-1.08
		6175	45	2.76	2.11	5.46	2.56	1.93	5.27	2.88	2.27	5.59	-3.46	2.13
		6415	93	3.46	3.80	6.64	3.21	3.57	6.40	3.30	3.66	6.49	-3.46	3.18
	UNII6	6435	97	3.26	3.03	6.16	3.07	2.74	5.92	3.13	2.79	5.98	-3.54	2.62
		6475	105	3.00	2.82	5.92	2.83	2.58	5.72	3.01	2.88	5.96	-3.54	2.42
		6515	113	3.40	2.99	6.21	3.16	2.84	6.02	3.22	2.76	6.00	-3.54	2.67
	52T	6535	117	3.25	2.72	6.00	3.07	2.50	5.81	3.20	2.50	5.87	-4.39	1.61
		6695	149	3.35	2.85	6.12	3.10	2.62	5.87	3.18	2.74	5.98	-4.39	1.73
		6855	181	3.02	2.47	5.76	2.73	2.22	5.49	2.77	2.46	5.63	-4.39	1.37
		6875	185	2.72	2.51	5.62	2.53	2.29	5.42	2.57	2.49	5.54	-5.18	0.44
		6995	209	3.01	2.49	5.77	2.81	2.34	5.59	2.91	2.52	5.73	-5.18	0.59
	7115	233	2.14	2.66	5.42	1.89	2.50	5.21	2.04	2.66	5.37	-5.18	0.23	

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	2.78	1.56	5.23	-	-	-	2.69	1.31	5.07	-3.46	1.76
		6175	45	5.72	5.40	8.57	-	-	-	5.82	5.52	8.68	-3.46	5.22
		6415	93	6.38	6.95	9.69	-	-	-	6.28	6.83	9.57	-3.46	6.22
	UNII6	6435	97	6.32	6.23	9.28	-	-	-	6.20	6.10	9.16	-3.54	5.75
		6475	105	6.06	6.05	9.07	-	-	-	6.05	6.08	9.08	-3.54	5.54
		6515	113	6.37	6.04	9.22	-	-	-	6.25	5.86	9.07	-3.54	5.68
	106T	6535	117	6.28	5.74	9.03	-	-	-	6.16	5.62	8.91	-4.39	4.64
		6695	149	6.44	5.40	8.96	-	-	-	6.32	5.32	8.86	-4.39	4.57
		6855	181	6.12	5.72	8.94	-	-	-	6.00	5.75	8.89	-4.39	4.55
	UNII8	6875	185	5.94	5.83	8.89	-	-	-	5.73	5.81	8.78	-5.18	3.71
		6995	209	6.12	5.69	8.92	-	-	-	6.02	5.74	8.89	-5.18	3.74
		7115	233	5.39	5.49	8.45	-	-	-	5.31	5.47	8.40	-5.18	3.27

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-	-	-	5.58	4.34	8.01	-	-	-	-3.46	4.55
		6175	45	-	-	-	9.07	8.15	11.64	-	-	-	-3.46	8.18
		6415	93	-	-	-	9.46	9.87	12.68	-	-	-	-3.46	9.22
	UNII6	6435	97	-	-	-	9.31	8.95	12.14	-	-	-	-3.54	8.61
		6475	105	-	-	-	9.11	8.84	11.99	-	-	-	-3.54	8.45
		6515	113	-	-	-	9.29	8.96	12.13	-	-	-	-3.54	8.60
	242T	6535	117	-	-	-	9.20	8.73	11.98	-	-	-	-4.39	7.59
		6695	149	-	-	-	9.26	8.66	11.98	-	-	-	-4.39	7.59
		6855	181	-	-	-	9.33	8.47	11.93	-	-	-	-4.39	7.54
	UNII8	6875	185	-	-	-	9.11	8.56	11.85	-	-	-	-5.18	6.67
		6995	209	-	-	-	9.04	8.53	11.80	-	-	-	-5.18	6.61
		7115	233	-	-	-	8.01	8.59	11.32	-	-	-	-5.18	6.14

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-	-	-	9.52	8.53	12.06	-	-	-	-3.46	8.60
		6175	45	-	-	-	9.58	8.85	12.24	-	-	-	-3.46	8.78
		6415	93	-	-	-	9.20	9.58	12.40	-	-	-	-3.46	8.94
	UNII6	6435	97	-	-	-	9.05	8.68	11.88	-	-	-	-3.54	8.34
		6475	105	-	-	-	8.81	8.47	11.66	-	-	-	-3.54	8.12
		6515	113	-	-	-	9.02	8.70	11.87	-	-	-	-3.54	8.34
	SU	6535	117	-	-	-	8.93	8.48	11.73	-	-	-	-4.39	7.34
		6695	149	-	-	-	9.00	8.39	11.72	-	-	-	-4.39	7.33
		6855	181	-	-	-	9.14	8.25	11.73	-	-	-	-4.39	7.34
	UNII8	6875	185	-	-	-	8.90	8.31	11.63	-	-	-	-5.18	6.44
		6995	209	-	-	-	8.83	8.26	11.57	-	-	-	-5.18	6.38
		7115	233	-	-	-	7.81	8.32	11.08	-	-	-	-5.18	5.89

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-0.02	-0.86	2.59	-0.54	-1.21	2.15	-0.12	-0.75	2.59	-3.46	-0.87
		6165	43	0.15	-0.88	2.68	0.01	-1.01	2.54	0.37	-0.53	2.95	-3.46	-0.51
		6405	91	0.45	0.71	3.59	0.08	0.35	3.23	0.28	0.38	3.34	-3.46	0.13
	UNII6	6445	99	0.38	-0.17	3.13	-0.07	-0.69	2.64	0.03	-0.55	2.76	-3.54	-0.41
		6485	107	0.05	-0.62	2.74	-0.12	-0.77	2.57	-0.03	-0.67	2.67	-3.54	-0.80
		6525	115	-0.15	0.17	3.02	-0.56	-0.46	2.50	-0.46	-0.35	2.61	-3.54	-0.52
	26T	6565	123	-1.38	0.06	2.41	-1.59	-0.26	2.14	-1.46	-0.12	2.27	-4.39	-1.98
		6685	147	0.31	0.59	3.46	0.08	0.27	3.19	0.07	0.35	3.22	-4.39	-0.92
		6845	179	0.02	0.28	3.16	-0.47	-0.21	2.67	-0.42	-0.06	2.78	-4.39	-1.23
	UNII8	6885	187	-0.11	0.41	3.17	-0.61	0.24	2.85	-0.52	0.42	2.98	-5.18	-2.02
		7005	211	-0.09	-0.17	2.88	-0.55	-0.39	2.54	-0.64	-0.21	2.59	-5.18	-2.30
		7085	227	-0.77	-0.20	2.54	-1.31	-0.50	2.12	-1.28	-0.11	2.35	-5.18	-2.65

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	3.01	2.83	5.93	2.67	2.59	5.64	3.14	2.94	6.05	-3.46	2.59
		6165	43	2.82	2.15	5.51	2.74	2.01	5.40	3.05	2.35	5.72	-3.46	2.26
		6405	91	2.60	2.97	5.80	2.33	2.80	5.58	2.44	2.83	5.65	-3.46	2.34
	UNII6	6445	99	3.58	3.25	6.43	3.12	2.73	5.94	3.26	2.93	6.11	-3.54	2.89
		6485	107	3.80	3.20	6.52	3.55	3.10	6.34	3.63	3.21	6.44	-3.54	2.98
		6525	115	3.70	3.24	6.49	3.27	2.75	6.03	3.48	2.74	6.13	-3.54	2.95
	52T	6565	123	3.82	2.82	6.36	3.48	2.61	6.08	3.68	2.83	6.29	-4.39	1.97
		6685	147	3.68	2.94	6.33	3.27	2.71	6.01	3.28	2.79	6.05	-4.39	1.94
		6845	179	3.55	2.77	6.19	3.06	2.43	5.77	2.99	2.60	5.81	-4.39	1.80
	UNII8	6885	187	3.12	2.79	5.97	2.70	2.56	5.64	2.72	2.74	5.74	-5.18	0.78
		7005	211	3.46	2.88	6.19	2.99	2.64	5.83	3.02	2.79	5.92	-5.18	1.00
		7085	227	2.51	2.40	5.47	2.05	2.20	5.13	2.24	2.37	5.32	-5.18	0.28

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	5.62	5.97	8.81	5.38	5.74	8.58	5.68	6.06	8.89	-3.46	5.43
		6165	43	5.74	5.48	8.62	5.66	5.37	8.53	5.98	5.66	8.83	-3.46	5.37
		6405	91	5.63	6.13	8.90	5.46	5.98	8.74	5.50	6.00	8.77	-3.46	5.44
	UNII6	6445	99	6.48	6.36	9.43	6.12	6.06	9.10	6.16	6.07	9.12	-3.54	5.90
		6485	107	6.66	6.21	9.45	6.50	6.09	9.31	6.49	6.20	9.36	-3.54	5.91
		6525	115	6.57	6.18	9.39	6.31	5.82	9.08	6.30	5.71	9.02	-3.54	5.86
	106T	6565	123	6.65	5.81	9.26	6.45	5.64	9.08	6.51	5.83	9.19	-4.39	4.87
		6685	147	6.73	5.51	9.17	6.46	5.35	8.95	6.42	5.36	8.93	-4.39	4.78
		6845	179	6.57	6.00	9.31	6.30	5.74	9.04	6.07	5.82	8.95	-4.39	4.92
	UNII8	6885	187	6.11	5.98	9.06	5.85	5.86	8.87	5.78	5.99	8.90	-5.18	3.87
		7005	211	6.35	5.85	9.12	6.09	5.73	8.92	6.01	5.78	8.91	-5.18	3.93
		7085	227	5.67	5.50	8.60	5.40	5.35	8.38	5.37	5.45	8.42	-5.18	3.41

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	8.04	8.21	11.13	-	-	-	8.12	8.27	11.20	-3.46	7.74
		6165	43	9.00	8.03	11.55	-	-	-	9.10	8.14	11.66	-3.46	8.20
		6405	91	8.45	8.97	11.73	-	-	-	8.35	8.85	11.62	-3.46	8.27
	UNII6	6445	99	8.86	8.44	11.66	-	-	-	8.63	8.20	11.43	-3.54	8.13
		6485	107	8.94	8.70	11.83	-	-	-	8.86	8.69	11.79	-3.54	8.30
		6525	115	8.82	8.59	11.72	-	-	-	8.63	8.27	11.46	-3.54	8.18
	242T	6565	123	9.28	8.30	11.83	-	-	-	9.17	8.28	11.76	-4.39	7.44
		6685	147	8.84	8.28	11.58	-	-	-	8.63	8.18	11.42	-4.39	7.19
		6845	179	9.21	8.15	11.72	-	-	-	8.86	8.03	11.48	-4.39	7.33
	UNII8	6885	187	8.75	8.21	11.50	-	-	-	8.55	8.20	11.39	-5.18	6.32
		7005	211	8.72	8.24	11.49	-	-	-	8.49	8.18	11.34	-5.18	6.31
		7085	227	7.68	7.84	10.77	-	-	-	7.49	7.82	10.67	-5.18	5.59

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-	-	-	8.16	8.32	11.25	-	-	-	-3.46	7.79
		6165	43	-	-	-	9.08	8.18	11.66	-	-	-	-3.46	8.20
		6405	91	-	-	-	8.49	8.97	11.75	-	-	-	-3.46	8.28
	UNII6	6445	99	-	-	-	8.82	8.41	11.63	-	-	-	-3.54	8.09
		6485	107	-	-	-	8.98	8.80	11.90	-	-	-	-3.54	8.36
		6525	115	-	-	-	8.77	8.51	11.65	-	-	-	-3.54	8.12
	484T	6565	123	-	-	-	9.28	8.36	11.85	-	-	-	-4.39	7.46
		6685	147	-	-	-	8.83	8.34	11.60	-	-	-	-4.39	7.21
		6845	179	-	-	-	9.10	8.13	11.65	-	-	-	-4.39	7.26
	UNII8	6885	187	-	-	-	8.71	8.26	11.50	-	-	-	-5.18	6.32
		7005	211	-	-	-	8.63	8.21	11.44	-	-	-	-5.18	6.25
		7085	227	-	-	-	7.61	7.87	10.75	-	-	-	-5.18	5.57

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-	-	-	8.44	8.42	11.44	-	-	-	-3.46	7.98
		6165	43	-	-	-	9.58	8.77	12.20	-	-	-	-3.46	8.74
		6405	91	-	-	-	9.22	9.57	12.41	-	-	-	-3.46	8.95
	UNII6	6445	99	-	-	-	8.97	8.57	11.79	-	-	-	-3.54	8.25
		6485	107	-	-	-	9.17	8.83	12.02	-	-	-	-3.54	8.48
		6525	115	-	-	-	8.99	8.61	11.82	-	-	-	-3.54	8.28
	SU	6565	123	-	-	-	9.35	8.44	11.93	-	-	-	-4.39	7.54
		6685	147	-	-	-	9.05	8.38	11.74	-	-	-	-4.39	7.35
		6845	179	-	-	-	9.26	8.32	11.82	-	-	-	-4.39	7.44
	UNII8	6885	187	-	-	-	8.83	8.38	11.62	-	-	-	-5.18	6.44
		7005	211	-	-	-	8.75	8.38	11.58	-	-	-	-5.18	6.39
		7085	227	-	-	-	7.84	7.99	10.92	-	-	-	-5.18	5.74

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 26T	UNII5	5985	7	-0.06	-0.73	2.63	-0.32	-0.69	2.51	0.05	-0.49	2.80	-3.46	-0.66
		6145	39	0.20	-0.57	2.84	-0.13	-0.98	2.48	0.28	-0.33	3.00	-3.46	-0.47
		6385	87	0.28	0.61	3.46	0.04	0.50	3.28	0.30	0.57	3.45	-3.46	0.00
	UNII6	6465	103	0.38	-0.19	3.12	-0.17	-0.64	2.61	0.11	-0.44	2.86	-3.54	-0.42
		6545	119	0.02	0.20	3.12	-0.62	-0.66	2.37	-0.50	-0.43	2.55	-3.54	-0.42
		6625	135	-0.64	0.47	2.96	-1.32	-0.48	2.13	-1.17	-0.37	2.26	-4.39	-1.43
	UNII7	6705	151	0.32	0.73	3.54	-0.26	0.13	2.95	-0.25	-0.21	2.78	-4.39	-0.85
		6785	167	0.04	0.11	3.09	-0.39	-0.10	2.77	-0.23	0.04	2.92	-4.39	-1.30
		6865	183	0.27	0.75	3.53	-0.37	0.24	2.96	-0.46	0.59	3.11	-5.18	-1.66
	UNII8	6945	199	0.49	0.54	3.53	-0.41	-0.02	2.80	-0.73	0.42	2.89	-5.18	-1.66
		7025	215	0.13	0.06	3.11	-0.64	-0.15	2.63	-1.29	-0.02	2.40	-5.18	-2.08

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 52T	UNII5	5985	7	3.05	3.09	6.08	3.14	3.08	6.12	3.38	3.21	6.30	-3.46	2.84
		6145	39	2.90	2.58	5.75	2.68	2.15	5.43	3.12	2.50	5.83	-3.46	2.37
		6385	87	3.67	3.96	6.83	3.39	3.86	6.64	3.52	3.84	6.69	-3.46	3.37
	UNII6	6465	103	3.58	3.27	6.44	3.11	2.80	5.97	3.24	3.11	6.19	-3.54	2.90
		6545	119	3.14	2.33	5.76	2.53	1.61	5.10	2.59	1.78	5.21	-3.54	2.23
	UNII7	6625	135	2.64	2.64	5.65	1.88	1.75	4.83	2.07	1.73	4.92	-4.39	1.26
		6705	151	3.57	2.88	6.25	2.89	2.38	5.65	2.85	2.37	5.63	-4.39	1.86
		6785	167	3.60	2.78	6.22	3.17	2.72	5.96	3.22	2.94	6.09	-4.39	1.83
	UNII8	6865	183	3.61	2.76	6.21	2.78	2.48	5.65	2.77	2.85	5.82	-5.18	1.03
		6945	199	3.84	3.11	6.50	2.90	2.65	5.79	2.69	2.95	5.83	-5.18	1.32
		7025	215	3.52	3.27	6.40	2.70	2.86	5.79	2.31	3.08	5.72	-5.18	1.22

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 106T	UNII5	5985	7	5.64	6.02	8.84	5.65	6.02	8.85	5.94	6.18	9.07	-3.46	5.61
		6145	39	5.77	5.68	8.74	5.66	5.30	8.49	6.12	5.61	8.88	-3.46	5.42
		6385	87	5.47	5.78	8.64	5.26	5.63	8.46	5.33	5.68	8.52	-3.46	5.18
	UNII6	6465	103	6.55	6.40	9.49	6.06	5.94	9.01	6.14	6.14	9.15	-3.54	5.95
		6545	119	5.99	5.51	8.77	5.30	4.71	8.03	5.51	4.91	8.23	-3.54	5.23
	UNII7	6625	135	5.67	5.84	8.77	5.07	5.07	8.08	5.11	5.14	8.14	-4.39	4.38
		6705	151	6.73	5.40	9.13	6.06	4.97	8.56	5.98	4.86	8.46	-4.39	4.74
		6785	167	6.76	5.98	9.40	6.24	5.90	9.09	6.29	6.02	9.17	-4.39	5.01
	UNII8	6865	183	6.64	6.01	9.35	5.80	5.67	8.74	5.75	5.97	8.87	-5.18	4.16
		6945	199	6.90	6.19	9.57	6.01	5.71	8.87	5.76	6.01	8.90	-5.18	4.39
		7025	215	6.48	6.42	9.46	5.66	6.00	8.84	5.32	6.09	8.73	-5.18	4.27

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 242T	UNII5	5985	7	8.23	8.36	11.31	8.10	8.34	11.23	8.63	8.62	11.64	-3.46	8.17
		6145	39	9.11	8.33	11.75	8.92	8.03	11.51	9.26	8.22	11.78	-3.46	8.32
		6385	87	8.47	8.65	11.58	8.27	8.55	11.42	8.30	8.66	11.49	-3.46	8.11
	UNII6	6465	103	9.04	8.56	11.81	8.72	8.30	11.52	8.71	8.52	11.62	-3.54	8.28
		6545	119	9.03	8.37	11.72	8.70	7.87	11.31	8.67	7.84	11.28	-3.54	8.18
	UNII7	6625	135	9.39	9.14	12.28	9.01	8.71	11.87	8.82	8.39	11.62	-4.39	7.89
		6705	151	9.01	8.34	11.70	8.69	8.09	11.41	8.31	7.77	11.06	-4.39	7.31
		6785	167	9.45	8.22	11.89	9.14	8.13	11.68	8.92	8.20	11.59	-4.39	7.50
	UNII8	6865	183	9.17	8.11	11.68	8.77	7.84	11.34	8.58	8.17	11.39	-5.18	6.50
		6945	199	9.26	8.52	11.92	8.80	8.23	11.53	8.35	8.37	11.37	-5.18	6.73
		7025	215	8.80	8.66	11.74	8.43	8.47	11.46	7.90	8.33	11.13	-5.18	6.56

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 484T	UNII5	5985	7	8.17	8.32	11.25	-	-	-	8.50	8.55	11.54	-3.46	8.07
		6145	39	8.97	8.12	11.58	-	-	-	9.08	8.05	11.61	-3.46	8.15
		6385	87	8.27	8.57	11.43	-	-	-	8.18	8.60	11.41	-3.46	7.97
	UNII6	6465	103	8.86	8.39	11.64	-	-	-	8.59	8.33	11.47	-3.54	8.10
		6545	119	8.85	8.07	11.49	-	-	-	8.59	7.75	11.20	-3.54	7.95
	UNII7	6625	135	9.12	8.89	12.02				8.71	8.37	11.56	-4.39	7.63
		6705	151	8.76	8.21	11.50	-	-	-	8.35	7.80	11.09	-4.39	7.11
		6785	167	9.21	8.15	11.72				8.95	8.22	11.61	-4.39	7.33
	UNII8	6865	183	9.06	8.05	11.60	-	-	-	8.63	8.13	11.40	-5.18	6.41
		6945	199	9.10	8.44	11.79	-	-	-	8.42	8.25	11.35	-5.18	6.61
		7025	215	8.63	8.53	11.59	-	-	-	7.95	8.28	11.13	-5.18	6.40

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 996T	UNII5	5985	7	-	-	-	8.28	8.43	11.36	-	-	-	-3.46	7.90
		6145	39	-	-	-	9.06	8.12	11.63	-	-	-	-3.46	8.16
		6385	87	-	-	-	8.21	8.56	11.40	-	-	-	-3.46	7.94
	UNII6	6465	103	-	-	-	8.74	8.39	11.58	-	-	-	-3.54	8.05
		6545	119	-	-	-	8.74	7.89	11.35	-	-	-	-3.54	7.81
	UNII7	6625	135				8.95	8.66	11.81				-4.39	7.42
		6705	151	-	-	-	8.57	8.01	11.31	-	-	-	-4.39	6.92
		6785	167				9.10	8.21	11.69				-4.39	7.30
	UNII8	6865	183	-	-	-	8.85	8.13	11.51	-	-	-	-5.18	6.33
		6945	199	-	-	-	8.76	8.35	11.57	-	-	-	-5.18	6.38
		7025	215	-	-	-	8.28	8.42	11.36	-	-	-	-5.18	6.18

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] SU	UNII5	5985	7	-	-	-	8.78	8.61	11.71	-	-	-	-3.46	8.25
		6145	39	-	-	-	9.75	8.84	12.33	-	-	-	-3.46	8.87
		6385	87	-	-	-	9.29	9.43	12.37	-	-	-	-3.46	8.91
	UNII6	6465	103	-	-	-	9.07	8.56	11.83	-	-	-	-3.54	8.30
		6545	119	-	-	-	9.53	8.53	12.07	-	-	-	-3.54	8.53
	UNII7	6625	135				9.25	8.86	12.07				-4.39	7.68
		6705	151	-	-	-	8.68	8.01	11.37	-	-	-	-4.39	6.98
		6785	167				9.07	8.27	11.70				-4.39	7.31
	UNII8	6865	183	-	-	-	8.97	8.19	11.61	-	-	-	-5.18	6.42
		6945	199	-	-	-	8.99	8.48	11.75	-	-	-	-5.18	6.57
		7025	215	-	-	-	8.66	8.63	11.65	-	-	-	-5.18	6.47

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 26T	UNII5	6025	15	-0.72	-1.26	2.03	-0.65	-1.04	2.17	-0.62	-0.97	2.22	-3.46	-1.24
		6185	47	0.22	-1.48	2.46	0.13	-1.80	2.29	0.15	-1.43	2.44	-3.46	-1.00
		6345	79	0.59	0.06	3.34	0.65	0.02	3.36	0.22	-0.51	2.88	-3.46	-0.10
	UNII6	6505	111	0.43	0.69	3.57	0.06	0.05	3.06	-0.09	-0.13	2.90	-3.54	0.04
	UNII7	6665	143	-0.23	0.24	3.02	-0.72	-0.20	2.56	-0.79	-0.84	2.19	-4.39	-1.37
	UNII8	6825	175	0.52	0.63	3.59	0.20	0.65	3.44	-0.14	-0.01	2.94	-5.18	-1.60
		6985	207	0.38	-0.92	2.79	-0.38	-1.43	2.14	-1.21	-1.70	1.57	-5.18	-2.40

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 52T	UNII5	6025	15	2.36	2.51	5.45	2.53	2.79	5.67	2.88	2.75	5.83	-3.46	2.36
		6185	47	3.12	2.80	5.97	3.29	2.45	5.90	3.32	2.69	6.02	-3.46	2.56
		6345	79	2.52	2.99	5.78	2.52	3.15	5.85	2.07	2.47	5.28	-3.46	2.39
	UNII6	6505	111	2.82	2.44	5.64	2.43	1.97	5.22	2.06	1.64	4.87	-3.54	2.11
	UNII7	6665	143	3.03	2.08	5.59	2.72	1.59	5.20	2.33	1.25	4.83	-4.39	1.20
	UNII8	6825	175	2.92	2.03	5.51	2.53	1.85	5.22	2.12	1.50	4.83	-5.18	0.32
		6985	207	3.34	1.63	5.58	2.44	1.09	4.83	1.75	0.92	4.36	-5.18	0.39

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 106T	UNII5	6025	15	5.14	5.47	8.32	5.53	5.56	8.55	5.62	5.67	8.66	-3.46	5.19
		6185	47	6.04	6.08	9.07	5.94	5.66	8.81	6.10	5.65	8.89	-3.46	5.61
		6345	79	5.50	6.16	8.85	5.43	6.05	8.77	5.10	5.50	8.31	-3.46	5.39
	UNII6	6505	111	5.85	5.54	8.71	5.36	4.95	8.17	5.11	4.90	8.02	-3.54	5.17
	UNII7	6665	143	6.04	5.29	8.69	5.45	4.68	8.09	5.31	4.42	7.90	-4.39	4.30
	UNII8	6825	175	5.73	5.24	8.50	5.29	5.17	8.24	4.89	4.85	7.88	-5.18	3.32
		6985	207	6.34	4.88	8.68	5.43	4.37	7.94	4.79	4.08	7.46	-5.18	3.50

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 242T	UNII5	6025	15	7.78	8.14	10.97	7.81	8.32	11.09	8.23	8.45	11.35	-3.46	7.89
		6185	47	8.88	8.44	11.68	8.86	8.25	11.58	8.80	8.00	11.43	-3.46	8.21
		6345	79	8.60	9.12	11.88	8.56	9.13	11.86	8.00	8.62	11.33	-3.46	8.42
	UNII6	6505	111	8.82	8.39	11.62	8.56	8.11	11.35	8.11	7.81	10.97	-3.54	8.08
	UNII7	6665	143	9.10	8.23	11.70	8.94	7.88	11.45	8.40	7.20	10.85	-4.39	7.31
	UNII8	6825	175	9.02	7.96	11.53	8.94	7.94	11.48	8.31	7.58	10.97	-5.18	6.35
		6985	207	9.37	7.71	11.63	8.93	7.44	11.26	7.93	7.06	10.53	-5.18	6.45

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 484T	UNII5	6025	15	7.73	8.20	10.98	-	-	-	8.10	8.45	11.29	-3.46	7.83
		6185	47	8.79	8.34	11.58	-	-	-	8.70	7.97	11.36	-3.46	8.12
		6345	79	8.53	9.14	11.85	-	-	-	8.18	8.78	11.50	-3.46	8.39
	UNII6	6505	111	9.08	8.24	11.69	-	-	-	8.55	7.87	11.23	-3.54	8.16
	UNII7	6665	143	8.96	7.99	11.51	-	-	-	8.44	7.24	10.89	-4.39	7.12
	UNII8	6825	175	8.96	7.97	11.50	-	-	-	8.37	7.65	11.04	-5.18	6.32
		6985	207	9.06	7.56	11.39	-	-	-	8.08	7.03	10.59	-5.18	6.20

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 996T	UNII5	6025	15	-	-	-	7.82	8.28	11.06	-	-	-	-3.46	7.60
		6185	47	-	-	-	8.66	8.11	11.41	-	-	-	-3.46	7.94
		6345	79	-	-	-	8.27	8.91	11.61	-	-	-	-3.46	8.15
	UNII6	6505	111	-	-	-	8.79	8.54	11.67	-	-	-	-3.54	8.14
	UNII7	6665	143	-	-	-	9.12	8.13	11.67	-	-	-	-4.39	7.28
	UNII8	6825	175	-	-	-	9.05	8.24	11.67	-	-	-	-5.18	6.49
		6985	207	-	-	-	8.86	7.76	11.35	-	-	-	-5.18	6.17

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 26T	UNII5	6025	15	-0.30	-0.77	2.48	-0.23	-0.87	2.47	0.15	-0.03	3.07	-3.46	-0.39
		6185	47	0.31	-1.44	2.53	0.66	-1.12	2.87	0.53	-1.06	2.82	-3.46	-0.59
		6345	79	0.33	-0.49	2.95	0.37	-0.32	3.05	0.10	-0.38	2.88	-3.46	-0.41
	UNII6	6505	111	-0.38	-0.07	2.79	-0.24	-0.42	2.68	-0.28	-0.41	2.66	-3.54	-0.75
	UNII7	6665	143	-0.94	-0.58	2.25	-1.07	-0.80	2.07	-1.56	-1.26	1.61	-4.39	-2.14
	UNII8	6825	175	-0.19	0.28	3.06	-0.49	-0.17	2.68	-0.83	-0.15	2.53	-5.18	-2.12
		6985	207	-1.37	-1.64	1.51	-1.83	-1.41	1.40	-2.39	-1.16	1.28	-5.18	-3.68

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 52T	UNII5	6025	15	2.93	2.82	5.88	3.39	3.09	6.25	3.91	3.47	6.70	-3.46	3.24
		6185	47	3.42	2.67	6.07	3.71	2.92	6.34	3.72	2.63	6.22	-3.46	2.88
		6345	79	1.97	2.60	5.31	2.04	2.64	5.36	1.64	2.20	4.94	-3.46	1.90
	UNII6	6505	111	2.18	1.69	4.95	2.01	1.47	4.76	1.81	1.50	4.66	-3.54	1.41
	UNII7	6665	143	2.43	1.26	4.89	2.19	1.25	4.76	1.72	0.97	4.38	-4.39	0.50
	UNII8	6825	175	1.96	1.53	4.76	1.45	1.53	4.50	0.99	1.34	4.18	-5.18	-0.42
		6985	207	1.63	0.93	4.31	1.30	0.98	4.16	0.84	0.97	3.91	-5.18	-0.88

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 106T	UNII5	6025	15	5.78	5.55	8.68	6.30	5.81	9.07	6.76	6.33	9.56	-3.46	6.10
		6185	47	6.28	5.81	9.06	6.65	5.92	9.31	6.60	5.79	9.22	-3.46	5.85
		6345	79	4.87	5.51	8.21	4.85	5.71	8.32	4.62	5.47	8.07	-3.46	4.85
	UNII6	6505	111	5.01	4.68	7.86	4.99	4.44	7.74	4.79	4.52	7.67	-3.54	4.32
	UNII7	6665	143	5.32	4.36	7.88	5.09	4.39	7.76	4.72	4.01	7.39	-4.39	3.49
	UNII8	6825	175	4.78	4.71	7.76	4.26	4.61	7.45	3.85	4.58	7.24	-5.18	2.57
		6985	207	4.65	4.14	7.41	4.38	4.23	7.32	3.97	4.31	7.15	-5.18	2.23

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 242T	UNII5	6025	15	8.48	8.29	11.40	8.49	8.37	11.44	9.28	9.07	12.19	-3.46	8.73
		6185	47	9.11	8.27	11.72	9.23	8.35	11.82	9.32	8.25	11.82	-3.46	8.36
		6345	79	7.88	8.39	11.15	7.82	8.41	11.14	7.71	8.41	11.08	-3.46	7.69
	UNII6	6505	111	7.89	7.49	10.71	7.90	7.35	10.64	7.86	7.38	10.63	-3.54	7.17
	UNII7	6665	143	8.35	7.21	10.82	8.25	7.25	10.79	7.93	6.96	10.48	-4.39	6.44
	UNII8	6825	175	7.96	7.28	10.64	7.68	7.25	10.48	7.28	7.32	10.31	-5.18	5.46
		6985	207	7.66	7.06	10.38	7.61	7.09	10.37	7.01	7.16	10.10	-5.18	5.20

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 484T	UNII5	6025	15	8.47	8.43	11.46	-	-	-	9.05	9.00	12.04	-3.46	8.57
		6185	47	9.12	8.28	11.73	-	-	-	9.25	8.33	11.82	-3.46	8.36
		6345	79	7.77	8.32	11.06	-	-	-	7.68	8.46	11.09	-3.46	7.63
	UNII6	6505	111	7.84	7.37	10.62	-	-	-	7.80	7.41	10.62	-3.54	7.09
	UNII7	6665	143	8.19	7.19	10.73	-	-	-	7.92	7.04	10.51	-4.39	6.34
	UNII8	6825	175	7.77	7.31	10.55	-	-	-	7.31	7.36	10.35	-5.18	5.37
		6985	207	7.52	7.02	10.29	-	-	-	7.10	7.06	10.09	-5.18	5.11

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 996T	UNII5	6025	15	-	-	-	8.73	8.69	11.72	-	-	-	-3.46	8.26
		6185	47	-	-	-	9.12	8.22	11.70	-	-	-	-3.46	8.24
		6345	79	-	-	-	7.63	8.38	11.03	-	-	-	-3.46	7.57
	UNII6	6505	111	-	-	-	8.23	7.92	11.09	-	-	-	-3.54	7.55
	UNII7	6665	143	-	-	-	8.60	7.64	11.16	-	-	-	-4.39	6.77
	UNII8	6825	175	-	-	-	8.02	7.77	10.91	-	-	-	-5.18	5.72
		6985	207	-	-	-	7.69	7.50	10.61	-	-	-	-5.18	5.42

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE160] SU	UNII5	6025	15	-	-	-	8.75	8.85	11.81	-	-	-	-3.46	8.35
		6185	47	-	-	-	9.29	8.57	11.95	-	-	-	-3.46	8.49
		6345	79	-	-	-	9.19	9.57	12.39	-	-	-	-3.46	8.93
	UNII6	6505	111	-	-	-	9.07	8.64	11.87	-	-	-	-3.54	8.33
	UNII7	6665	143	-	-	-	9.34	8.36	11.89	-	-	-	-4.39	7.50
	UNII8	6825	175	-	-	-	8.99	8.51	11.77	-	-	-	-5.18	6.58
		6985	207	-	-	-	8.89	8.06	11.50	-	-	-	-5.18	6.32

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
802.11a	UNII5	5935	2	-	-	-	9.50	8.07	11.86	-	-	-	-3.46	8.39
		6175	45	-	-	-	9.51	8.68	12.13	-	-	-	-3.46	8.67
		6415	93	-	-	-	9.03	9.34	12.20	-	-	-	-3.46	8.74
	UNII6	6435	97	-	-	-	8.95	8.52	11.75	-	-	-	-3.54	8.21
		6475	105	-	-	-	8.68	8.34	11.52	-	-	-	-3.54	7.99
		6515	113	-	-	-	8.88	8.51	11.71	-	-	-	-3.54	8.17
	UNII7	6535	117	-	-	-	8.77	8.26	11.53	-	-	-	-4.39	7.14
		6695	149	-	-	-	8.87	8.16	11.54	-	-	-	-4.39	7.15
		6855	181	-	-	-	8.97	8.03	11.54	-	-	-	-4.39	7.15
	UNII8	6875	185	-	-	-	8.74	8.16	11.47	-	-	-	-5.18	6.28
		6995	209	-	-	-	8.68	8.01	11.37	-	-	-	-5.18	6.18
		7115	233	-	-	-	7.71	8.12	10.93	-	-	-	-5.18	5.74

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE160] 996*2T	UNII5	6025	15	-	-	-	7.96	8.46	11.23	-	-	-	-3.46	7.76
		6185	47	-	-	-	8.52	8.14	11.34	-	-	-	-3.46	7.88
		6345	79	-	-	-	8.17	9.04	11.64	-	-	-	-3.46	8.18
	UNII6	6505	111	-	-	-	8.25	8.20	11.23	-	-	-	-3.54	7.70
	UNII7	6665	143	-	-	-	8.62	7.94	11.30	-	-	-	-4.39	6.91
	UNII8	6825	175	-	-	-	8.24	8.08	11.17	-	-	-	-5.18	5.99
		6985	207	-	-	-	8.00	7.70	10.87	-	-	-	-5.18	5.68

**10.3.2 E.I.R.P Output Power(Standard client)**

Limit : 30 dBm(e.i.r.p)

(MIMO)

- ANT1 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- ANT2 Max. Output Power (dBm) : Measured Conducted Power(dBm) + Duty Factor (dB)
- MIMO Max. Output Power (dBm) = ANT1 Max. Output Power + ANT2 Max. Output Power
- EIRP Output Power (dBm) = MIMO Max. Output Power + Directional Gain (dBi)

-Note: The MIMO formula on page 7 and the maximum gain of each band in the antenna gain table were applied.

### 10.3.2.1 Ant 1

Max. Output Power (dBm) = Measured Conducted Power (dBm) + Duty Factor (dB)

EIRP Output Power (dBm) = Max. Output Power + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm/MHz]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE20]  26T	UNII5	5935	2	-3.11	-3.51	-3.26	-5.80	-8.91
		6175	45	8.97	8.57	9.09	-5.80	3.29
		6415	93	8.42	7.98	8.28	-5.80	2.62
	UNII7	6535	117	8.16	7.70	8.03	-7.40	0.76
		6695	149	8.15	7.67	7.99	-7.40	0.75
		6855	181	8.48	7.93	8.12	-7.40	1.08

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE20]  52T	UNII5	5935	2	-0.31	-0.54	-0.45	-5.80	-6.11
		6175	45	8.78	8.64	8.95	-5.80	3.15
		6415	93	8.34	8.09	8.18	-5.80	2.54
	UNII7	6535	117	8.02	7.80	7.99	-7.40	0.62
		6695	149	8.04	7.82	7.89	-7.40	0.64
		6855	181	8.31	8.08	8.09	-7.40	0.91

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE20]  106T	UNII5	5935	2	2.78	-	2.69	-5.80	-3.02
		6175	45	8.84	-	8.99	-5.80	3.19
		6415	93	8.35	-	8.27	-5.80	2.55
	UNII7	6535	117	8.06	-	8.04	-7.40	0.66
		6695	149	8.11	-	7.97	-7.40	0.71
		6855	181	8.34	-	8.21	-7.40	0.94

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE20] 242T	UNII5	5935	2	-	5.58	-	-5.80	-0.22
		6175	45	-	8.94	-	-5.80	3.14
		6415	93	-	9.41	-	-5.80	3.61
	UNII7	6535	117	-	9.17	-	-7.40	1.77
		6695	149	-	9.20	-	-7.40	1.80
		6855	181	-	9.32	-	-7.40	1.92

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE20] SU	UNII5	5935	2	-	9.43	-	-5.80	3.63
		6175	45	-	9.52	-	-5.80	3.72
		6415	93	-	9.15	-	-5.80	3.35
	UNII7	6535	117	-	8.90	-	-7.40	1.50
		6695	149	-	8.92	-	-7.40	1.52
		6855	181	-	9.04	-	-7.40	1.64

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40] 26T	UNII5	5965	3	7.54	7.12	7.58	-5.80	1.78
		6165	43	8.96	8.72	9.11	-5.80	3.31
		6405	91	8.49	8.14	8.22	-5.80	2.69
	UNII7	6565	123	8.78	8.43	8.63	-7.40	1.38
		6685	147	8.29	7.95	7.85	-7.40	0.89
		6845	179	8.80	8.21	8.23	-7.40	1.40

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40] 52T	UNII5	5965	3	7.69	7.35	7.73	-5.80	1.93
		6165	43	9.03	8.87	9.23	-5.80	3.43
		6405	91	8.64	8.29	8.47	-5.80	2.84
	UNII7	6565	123	8.93	8.55	8.77	-7.40	1.53
		6685	147	8.41	8.04	8.05	-7.40	1.01
		6845	179	8.88	8.40	8.41	-7.40	1.48

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40] 106T	UNII5	5965	3	7.63	7.38	7.72	-5.80	1.92
		6165	43	9.07	8.91	9.24	-5.80	3.44
		6405	91	8.64	8.43	8.46	-5.80	2.84
	UNII7	6565	123	8.93	8.70	8.78	-7.40	1.53
		6685	147	8.34	8.12	8.09	-7.40	0.94
		6845	179	8.89	8.56	8.40	-7.40	1.49

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40] 242T	UNII5	5965	3	8.01	-	8.03	-5.80	2.23
		6165	43	8.96	-	9.05	-5.80	3.25
		6405	91	8.46	-	8.37	-5.80	2.66
	UNII7	6565	123	9.18	-	9.08	-7.40	1.78
		6685	147	8.82	-	8.60	-7.40	1.42
		6845	179	9.15	-	8.81	-7.40	1.75

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40] 48T	UNII5	5965	3	-	8.06	-	-5.80	2.26
		6165	43	-	9.08	-	-5.80	3.28
		6405	91	-	8.47	-	-5.80	2.67
	UNII7	6565	123	-	9.20	-	-7.40	1.80
		6685	147	-	8.77	-	-7.40	1.37
		6845	179	-	9.07	-	-7.40	1.67

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE40] SU	UNII5	5965	3	-	8.63	-	-5.80	2.83
		6165	43	-	9.57	-	-5.80	3.77
		6405	91	-	9.23	-	-5.80	3.43
	UNII7	6565	123	-	9.42	-	-7.40	2.02
		6685	147	-	9.04	-	-7.40	1.64
		6845	179	-	9.29	-	-7.40	1.89

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80] 26T	UNII5	5985	7	7.60	7.50	7.97	-5.80	2.17
		6145	39	9.04	8.85	9.28	-5.80	3.48
		6385	87	8.38	8.14	8.27	-5.80	2.58
	UNII7	6625	135	8.86	8.09	8.15	-7.40	1.46
		6705	151	8.33	7.67	7.62	-7.40	0.93
		6785	167	8.77	8.24	8.34	-7.40	1.37

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80] 52T	UNII5	5985	7	7.58	7.52	7.93	-5.80	2.13
		6145	39	9.04	8.90	9.29	-5.80	3.49
		6385	87	8.41	8.17	8.33	-5.80	2.61
	UNII7	6625	135	8.86	8.21	8.24	-7.40	1.46
		6705	151	8.29	7.82	7.64	-7.40	0.89
		6785	167	8.77	8.37	8.42	-7.40	1.37

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80] 106T	UNII5	5985	7	7.61	7.57	7.91	-5.80	2.11
		6145	39	9.17	8.97	9.33	-5.80	3.53
		6385	87	8.56	8.27	8.39	-5.80	2.76
	UNII7	6625	135	8.91	8.27	8.25	-7.40	1.51
		6705	151	8.38	7.78	7.64	-7.40	0.98
		6785	167	8.90	8.41	8.41	-7.40	1.50

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80] 242T	UNII5	5985	7	8.15	8.05	8.57	-5.80	2.77
		6145	39	9.11	8.95	9.23	-5.80	3.43
		6385	87	8.48	8.30	8.33	-5.80	2.68
	UNII7	6625	135	9.31	9.04	8.79	-7.40	1.91
		6705	151	8.94	8.61	8.34	-7.40	1.54
		6785	167	9.36	9.09	9.00	-7.40	1.96
[HE80] 484T	UNII5	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
	UNII7	5985	7	8.11	-	8.48	-5.80	2.68
		6145	39	9.01	-	9.09	-5.80	3.29
		6385	87	8.37	-	8.27	-5.80	2.57
	UNII7	6625	135	8.99	-	8.56	-7.40	1.59
		6705	151	8.55	-	8.14	-7.40	1.15
		6785	167	9.04	-	8.75	-7.40	1.64

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80] 996T	UNII5	5985	7	-	8.27	-	-5.80	2.47
		6145	39	-	9.05	-	-5.80	3.25
		6385	87	-	8.30	-	-5.80	2.50
	UNII7	6625	135	-	8.88	-	-7.40	1.48
		6705	151	-	8.47	-	-7.40	1.07
		6785	167	-	9.01	-	-7.40	1.61

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80] SU	UNII5	5985	7	-	8.72	-	-5.80	2.92
		6145	39	-	9.63	-	-5.80	3.83
		6385	87	-	9.17	-	-5.80	3.37
	UNII7	6625	135	-	9.13	-	-7.40	1.73
		6705	151	-	8.83	-	-7.40	1.43
		6785	167	-	9.23	-	-7.40	1.83

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80L] 26T	UNII5	6025	15	7.17	7.48	7.73	-5.80	1.93
		6185	47	8.21	8.25	8.33	-5.80	2.53
		6345	79	8.49	8.56	7.95	-5.80	2.76
	UNII7	6665	143	9.12	8.66	8.37	-7.40	1.72

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80L] 52T	UNII5	6025	15	7.17	7.49	7.79	-5.80	1.99
		6185	47	8.17	8.25	8.22	-5.80	2.45
		6345	79	8.51	8.49	7.97	-5.80	2.71
	UNII7	6665	143	9.02	8.54	8.39	-7.40	1.62

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80L] 106T	UNII5	6025	15	7.16	7.50	7.56	-5.80	1.76
		6185	47	8.09	8.22	8.19	-5.80	2.42
		6345	79	8.50	8.26	8.07	-5.80	2.70
	UNII7	6665	143	8.96	8.49	8.23	-7.40	1.56

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80L] 242T	UNII5	6025	15	7.77	7.86	8.24	-5.80	2.44
		6185	47	8.91	8.92	8.73	-5.80	3.12
		6345	79	8.57	8.48	8.10	-5.80	2.77
	UNII7	6665	143	9.11	8.85	8.25	-7.40	1.71

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80L] 484T	UNII5	6025	15	7.76	-	8.06	-5.80	2.26
		6185	47	8.88	-	8.75	-5.80	3.08
		6345	79	8.52	-	8.21	-5.80	2.72
	UNII7	6665	143	8.90	-	8.33	-7.40	1.50

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 996T	UNII5	6025	15	-	7.91	-	-5.80	2.11
		6185	47	-	8.75	-	-5.80	2.95
		6345	79	-	8.28	-	-5.80	2.48
	UNII7	6665	143	-	9.18	-	-7.40	1.78
Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 26T	UNII5	6025	15	7.77	8.02	8.60	-5.80	2.80
		6185	47	8.31	8.73	8.71	-5.80	2.93
		6345	79	7.95	7.83	7.62	-5.80	2.15
	UNII7	6665	143	8.32	8.11	7.76	-7.40	0.92

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 52T	UNII5	6025	15	7.66	8.10	8.46	-5.80	2.66
		6185	47	8.35	8.74	8.59	-5.80	2.94
		6345	79	7.94	7.97	7.67	-5.80	2.17
	UNII7	6665	143	8.28	8.16	7.71	-7.40	0.88

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 106T	UNII5	6025	15	7.67	7.99	8.45	-5.80	2.65
		6185	47	8.30	8.79	8.62	-5.80	2.99
		6345	79	7.88	7.73	7.60	-5.80	2.08
	UNII7	6665	143	8.24	7.93	7.68	-7.40	0.84

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 242T	UNII5	6025	15	8.40	8.51	9.18	-5.80	3.38
		6185	47	9.05	9.23	9.29	-5.80	3.49
		6345	79	7.90	7.83	7.76	-5.80	2.10
	UNII7	6665	143	8.24	8.12	7.82	-7.40	0.84

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 484T	UNII5	6025	15	8.37	-	9.01	-5.80	3.21
		6185	47	9.07	-	9.25	-5.80	3.45
		6345	79	7.79	-	7.75	-5.80	1.99
	UNII7	6665	143	8.10	-	7.86	-7.40	0.70
Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE80U] 996T	UNII5	6025	15	-	8.67	-	-5.80	2.87
		6185	47	-	9.09	-	-5.80	3.29
		6345	79	-	7.78	-	-5.80	1.98
	UNII7	6665	143	-	8.58	-	-7.40	1.18

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE160] 996*2T	UNII5	6025	15	-	7.96	-	-5.80	2.16
		6185	47	-	8.52	-	-5.80	2.72
		6345	79	-	8.17	-	-5.80	2.37
	UNII7	6665	143	-	8.62	-	-7.40	1.22

Mode	Band	Freq.[MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
[HE160] SU	UNII5	6025	15	-	8.78	-	-5.80	2.98
		6185	47	-	9.28	-	-5.80	3.48
		6345	79	-	9.21	-	-5.80	3.41
	UNII7	6665	143	-	9.34	-	-7.40	1.94

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm]
802.11a	UNII5	5935	2	-	8.42	-	-5.80	2.62
		6175	45	-	9.52	-	-5.80	3.72
		6415	93	-	9.00	-	-5.80	3.20
	UNII7	6535	117	-	8.84	-	-7.40	1.44
		6695	149	-	8.85	-	-7.40	1.45
		6855	181	-	8.86	-	-7.40	1.46

### 10.3.2.2 Ant 2

Max. Output Power (dBm) = Measured Conducted Power (dBm) + Duty Factor (dB)

EIRP Output Power (dBm) = Max. Output Power + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm/MHz]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE20] 26T	UNII5	5935	2	-3.93	-4.43	-4.13	-7.20	-11.13
		6175	45	8.09	7.78	8.25	-7.20	1.05
		6415	93	9.02	8.52	8.77	-7.20	1.82
	UNII7	6535	117	7.88	7.38	7.72	-7.40	0.48
		6695	149	7.80	7.37	7.71	-7.40	0.40
		6855	181	7.67	7.16	7.64	-7.40	0.27

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE20] 52T	UNII5	5935	2	-0.97	-1.24	-1.18	-7.20	-8.17
		6175	45	7.98	7.86	8.11	-7.20	0.91
		6415	93	8.90	8.66	8.73	-7.20	1.70
	UNII7	6535	117	7.74	7.53	7.57	-7.40	0.34
		6695	149	7.73	7.51	7.62	-7.40	0.33
		6855	181	7.52	7.32	7.55	-7.40	0.15

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2		
[HE20] 106T	UNII5	5935	2	1.56	-	1.31	-7.20	-5.64
		6175	45	8.07	-	8.18	-7.20	0.98
		6415	93	8.93	-	8.82	-7.20	1.73
	UNII7	6535	117	7.84	-	7.68	-7.40	0.44
		6695	149	7.76	-	7.68	-7.40	0.36
		6855	181	7.61	-	7.58	-7.40	0.21

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE20] 242T	UNII5	5935	2	-	4.34	-	-7.20	-2.86
		6175	45	-	8.12	-	-7.20	0.92
		6415	93	-	9.81	-	-7.20	2.61
	UNII7	6535	117	-	8.74	-	-7.40	1.34
		6695	149	-	8.65	-	-7.40	1.25
		6855	181	-	8.51	-	-7.40	1.11

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE20] SU	UNII5	5935	2	-	8.44	-	-7.20	1.24
		6175	45	-	8.91	-	-7.20	1.71
		6415	93	-	9.69	-	-7.20	2.49
	UNII7	6535	117	-	8.53	-	-7.40	1.13
		6695	149	-	8.47	-	-7.40	1.07
		6855	181	-	8.28	-	-7.40	0.88

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE40] 26T	UNII5	5965	3	7.89	7.50	7.89	-7.20	0.69
		6165	43	8.11	7.85	8.24	-7.20	1.04
		6405	91	8.98	8.75	8.77	-7.20	1.78
	UNII7	6565	123	8.03	7.64	7.88	-7.40	0.63
		6685	147	7.75	7.59	7.62	-7.40	0.35
		6845	179	7.83	7.37	7.63	-7.40	0.43
[HE40] 52T	UNII5	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
	UNII7	5965	3	7.87	7.51	7.91	-7.20	0.71
		6165	43	8.09	7.90	8.23	-7.20	1.03
		6405	91	9.05	8.73	8.77	-7.20	1.85
	UNII7	6565	123	7.91	7.68	7.89	-7.40	0.51
		6685	147	7.78	7.52	7.65	-7.40	0.38
		6845	179	7.76	7.39	7.59	-7.40	0.36

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE40] 106T	UNII5	5965	3	7.85	7.61	7.88	-7.20	0.68
		6165	43	8.14	7.95	8.22	-7.20	1.02
		6405	91	9.05	8.82	8.82	-7.20	1.85
	UNII7	6565	123	7.93	7.72	7.91	-7.40	0.53
		6685	147	7.80	7.65	7.70	-7.40	0.40
		6845	179	7.82	7.54	7.60	-7.40	0.42

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE40] 242T	UNII5	5965	3	8.19	-	8.20	-7.20	1.00
		6165	43	8.00	-	8.08	-7.20	0.88
		6405	91	8.95	-	8.78	-7.20	1.75
	UNII7	6565	123	8.24	-	8.19	-7.40	0.84
		6685	147	8.25	-	8.16	-7.40	0.85
		6845	179	8.14	-	8.03	-7.40	0.74

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE40] 484T	UNII5	5965	3	-	8.26	-	-7.20	1.06
		6165	43	-	8.11	-	-7.20	0.91
		6405	91	-	8.94	-	-7.20	1.74
	UNII7	6565	123	-	8.29	-	-7.40	0.89
		6685	147	-	8.26	-	-7.40	0.86
		6845	179	-	8.17	-	-7.40	0.77
[HE40] SU	UNII5	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
	UNII7	5965	3	-	8.48	-	-7.20	1.28
		6165	43	-	8.83	-	-7.20	1.63
		6405	91	-	9.62	-	-7.20	2.42
	UNII7	6565	123	-	8.47	-	-7.40	1.07
		6685	147	-	8.37	-	-7.40	0.97
		6845	179	-	8.28	-	-7.40	0.88

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] 26T	UNII5	5985	7	7.92	7.83	8.06	-7.20	0.86
		6145	39	8.36	7.80	8.24	-7.20	1.16
		6385	87	8.81	8.48	8.71	-7.20	1.61
	UNII7	6625	135	8.64	7.73	7.89	-7.40	1.24
		6705	151	7.68	7.31	7.22	-7.40	0.28
		6785	167	7.66	7.45	7.75	-7.40	0.35

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] 52T	UNII5	5985	7	7.98	7.76	8.04	-7.20	0.84
		6145	39	8.27	7.90	8.21	-7.20	1.07
		6385	87	8.75	8.59	8.63	-7.20	1.55
	UNII7	6625	135	8.59	7.82	7.91	-7.40	1.19
		6705	151	7.71	7.26	7.16	-7.40	0.31
		6785	167	7.58	7.50	7.74	-7.40	0.34

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] 106T	UNII5	5985	7	7.86	7.83	8.07	-7.20	0.87
		6145	39	8.26	7.90	8.23	-7.20	1.06
		6385	87	8.72	8.61	8.67	-7.20	1.52
	UNII7	6625	135	8.60	7.81	7.85	-7.40	1.20
		6705	151	7.73	7.36	7.09	-7.40	0.33
		6785	167	7.68	7.64	7.74	-7.40	0.34
[HE80] 242T	UNII5	5985	7	8.29	8.14	8.61	-7.20	1.41
		6145	39	8.34	7.99	8.22	-7.20	1.14
		6385	87	8.76	8.67	8.74	-7.20	1.56
	UNII7	6625	135	9.06	8.70	8.41	-7.40	1.66
		6705	151	8.23	8.01	7.77	-7.40	0.83
		6785	167	8.18	8.04	8.33	-7.40	0.93

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] 484T	UNII5	5985	7	8.19	-	8.47	-7.20	1.27
		6145	39	8.17	-	8.05	-7.20	0.97
		6385	87	8.68	-	8.69	-7.20	1.49
	UNII7	6625	135	8.68	-	8.16	-7.40	1.28
		6705	151	7.93	-	7.58	-7.40	0.53
		6785	167	7.90	-	8.00	-7.40	0.60

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] 996T	UNII5	5985	7	-	8.31	-	-7.20	1.11
		6145	39	-	8.06	-	-7.20	0.86
		6385	87	-	8.71	-	-7.20	1.51
	UNII7	6625	135	-	8.55	-	-7.40	1.15
		6705	151	-	7.90	-	-7.40	0.50
		6785	167	-	8.08	-	-7.40	0.68

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80] SU	UNII5	5985	7	-	8.61	-	-7.20	1.41
		6145	39	-	8.85	-	-7.20	1.65
		6385	87	-	9.54	-	-7.20	2.34
	UNII7	6625	135	-	8.88	-	-7.40	1.48
		6705	151	-	8.22	-	-7.40	0.82
		6785	167	-	8.49	-	-7.40	1.09
[HE80L] 26T	UNII5	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
	UNII7	6025	15	7.74	7.86	7.73	-7.20	0.66
		6185	47	7.60	7.50	7.60	-7.20	0.40
		6345	79	8.98	9.00	8.51	-7.20	1.80
		6665	143	8.13	7.51	7.09	-7.40	0.73

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80L] 52T	UNII5	6025	15	7.74	7.91	7.97	-7.20	0.77
		6185	47	7.77	7.59	7.55	-7.20	0.57
		6345	79	9.07	9.13	8.49	-7.20	1.93
	UNII7	6665	143	8.11	7.56	7.31	-7.40	0.71

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80L] 106T	UNII5	6025	15	7.64	7.98	7.87	-7.20	0.78
		6185	47	7.80	7.59	7.49	-7.20	0.60
		6345	79	9.09	8.97	8.46	-7.20	1.89
	UNII7	6665	143	8.06	7.45	7.15	-7.40	0.66

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80L] 242T	UNII5	6025	15	8.14	8.15	8.34	-7.20	1.14
		6185	47	8.41	8.28	7.99	-7.20	1.21
		6345	79	9.15	9.19	8.57	-7.20	1.99
	UNII7	6665	143	8.23	7.94	7.20	-7.40	0.83

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80L] 484T	UNII5	6025	15	8.12	-	8.33	-7.20	1.13
		6185	47	8.29	-	7.92	-7.20	1.09
		6345	79	9.09	-	8.77	-7.20	1.89
	UNII7	6665	143	7.94	-	7.23	-7.40	0.54
Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80L] 996T	UNII5	6025	15	-	8.16	-	-7.20	0.96
		6185	47	-	8.03	-	-7.20	0.83
		6345	79	-	8.84	-	-7.20	1.64
	UNII7	6665	143	-	8.09	-	-7.40	0.69

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80U] 26T	UNII5	6025	15	7.83	7.88	8.46	-7.20	1.26
		6185	47	7.51	7.89	7.79	-7.20	0.69
		6345	79	8.31	8.40	8.10	-7.20	1.20
	UNII7	6665	143	7.13	7.16	6.87	-7.40	-0.24

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80U] 52T	UNII5	6025	15	7.93	8.01	8.31	-7.20	1.11
		6185	47	7.55	7.75	7.50	-7.20	0.55
		6345	79	8.17	8.27	8.05	-7.20	1.07
	UNII7	6665	143	7.00	6.95	6.70	-7.40	-0.40

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80U] 106T	UNII5	6025	15	7.80	7.85	8.27	-7.20	1.07
		6185	47	7.36	7.62	7.49	-7.20	0.42
		6345	79	8.13	8.24	8.02	-7.20	1.04
	UNII7	6665	143	7.10	7.00	6.70	-7.40	-0.30

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80U] 242T	UNII5	6025	15	8.33	8.34	8.99	-7.20	1.79
		6185	47	8.24	8.30	8.18	-7.20	1.10
		6345	79	8.18	8.14	8.22	-7.20	1.02
	UNII7	6665	143	6.99	7.07	6.79	-7.40	-0.33
Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80U] 484T	UNII5	6025	15	8.28	-	8.80	-7.20	1.60
		6185	47	8.16	-	8.22	-7.20	1.02
		6345	79	8.11	-	8.17	-7.20	0.97
	UNII7	6665	143	6.92	-	6.77	-7.40	-0.48

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE80U] 996T	UNII5	6025	15	-	8.51	-	-7.20	1.31
		6185	47	-	8.16	-	-7.20	0.96
	UNII7	6345	79	-	8.02	-	-7.20	0.82
		6665	143	-	7.57	-	-7.40	0.17

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE160] 996*2T	UNII5	6025	15	-	8.46	-	-7.20	1.26
		6185	47	-	8.14	-	-7.20	0.94
	UNII7	6345	79	-	9.04	-	-7.20	1.84
		6665	143	-	7.94	-	-7.40	0.54

Mode	Band	Freq.[MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
[HE160] SU	UNII5	6025	15	-	8.67	-	-7.20	1.47
		6185	47	-	8.37	-	-7.20	1.17
	UNII7	6345	79	-	9.42	-	-7.20	2.22
		6665	143	-	8.20	-	-7.40	0.80

Mode	Band	Freq. [MHz]	CH.	Total Average Power [dBm]			Directional Gain	Maximum E.I.R.P
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm]
802.11a	UNII5	5935	2	-	8.39	-	-7.20	1.19
		6175	45	-	8.75	-	-7.20	1.55
		6415	93	-	9.47	-	-7.20	2.27
	UNII7	6535	117	-	8.37	-	-7.40	0.97
		6695	149	-	8.24	-	-7.40	0.84
		6855	181	-	8.22	-	-7.40	0.82

### 10.3.2.3 SUM (MIMO)

Max. Output Power (dBm) = ANT1 Max. Output Power + ANT2 Max. Output Power

EIRP Output Power (dBm) = MIMO Max. Output Power + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE20] 26T	UNII5	5935	2	-3.11	-3.93	-0.49	-3.51	-4.43	-0.93	-3.26	-4.13	-0.66	-3.46	-3.95
		6175	45	8.97	8.09	11.56	8.57	7.78	11.20	9.09	8.25	11.70	-3.46	8.24
		6415	93	8.42	9.02	11.74	7.98	8.52	11.27	8.28	8.77	11.54	-3.46	8.28
	UNII7	6535	117	8.16	7.88	11.03	7.70	7.38	10.55	8.03	7.72	10.89	-4.39	6.64
		6695	149	8.15	7.80	10.99	7.67	7.37	10.53	7.99	7.71	10.86	-4.39	6.60
		6855	181	8.48	7.67	11.10	7.93	7.16	10.57	8.12	7.64	10.90	-4.39	6.71

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE20] 52T	UNII5	5935	2	-0.31	-0.97	2.38	-0.54	-1.24	2.14	-0.45	-1.18	2.21	-3.46	-1.08
		6175	45	8.78	7.98	11.41	8.64	7.86	11.28	8.95	8.11	11.56	-3.46	8.10
		6415	93	8.34	8.90	11.64	8.09	8.66	11.39	8.18	8.73	11.47	-3.46	8.18
	UNII7	6535	117	8.02	7.74	10.89	7.80	7.53	10.68	7.99	7.57	10.80	-4.39	6.50
		6695	149	8.04	7.73	10.90	7.82	7.51	10.68	7.89	7.62	10.77	-4.39	6.51
		6855	181	8.31	7.52	10.95	8.08	7.32	10.73	8.09	7.55	10.84	-4.39	6.56

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE20] 106T	UNII5	5935	2	2.78	1.56	5.23	-	-	-	2.69	1.31	5.07	-3.46	1.76
		6175	45	8.84	8.07	11.49	-	-	-	8.99	8.18	11.61	-3.46	8.15
		6415	93	8.35	8.93	11.66	-	-	-	8.27	8.82	11.56	-3.46	8.20
	UNII7	6535	117	8.06	7.84	10.96	-	-	-	8.04	7.68	10.87	-4.39	6.57
		6695	149	8.11	7.76	10.95	-	-	-	7.97	7.68	10.84	-4.39	6.56
		6855	181	8.34	7.61	11.00	-	-	-	8.21	7.58	10.92	-4.39	6.61

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE20]	UNII5	5935	2	-	-	-	5.58	4.34	8.01	-	-	-	-3.46	4.55
		6175	45	-	-	-	8.94	8.12	11.56	-	-	-	-3.46	8.10
		6415	93	-	-	-	9.41	9.81	12.62	-	-	-	-3.46	9.16
	UNII7	6535	117	-	-	-	9.17	8.74	11.97	-	-	-	-4.39	7.58
		6695	149	-	-	-	9.20	8.65	11.94	-	-	-	-4.39	7.55
		6855	181	-	-	-	9.32	8.51	11.94	-	-	-	-4.39	7.55

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE20]	UNII5	5935	2	-	-	-	9.43	8.44	11.98	-	-	-	-3.46	8.51
		6175	45	-	-	-	9.52	8.91	12.23	-	-	-	-3.46	8.77
		6415	93	-	-	-	9.15	9.69	12.44	-	-	-	-3.46	8.98
	UNII7	6535	117	-	-	-	8.90	8.53	11.73	-	-	-	-4.39	7.34
		6695	149	-	-	-	8.92	8.47	11.71	-	-	-	-4.39	7.32
		6855	181	-	-	-	9.04	8.28	11.69	-	-	-	-4.39	7.30

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE40]	UNII5	5965	3	7.54	7.89	10.73	7.12	7.50	10.33	7.58	7.89	10.75	-3.46	7.29
		6165	43	8.96	8.11	11.57	8.72	7.85	11.31	9.11	8.24	11.70	-3.46	8.24
		6405	91	8.49	8.98	11.75	8.14	8.75	11.46	8.22	8.77	11.52	-3.46	8.29
	UNII7	6565	123	8.78	8.03	11.43	8.43	7.64	11.07	8.63	7.88	11.28	-4.39	7.04
		6685	147	8.29	7.75	11.04	7.95	7.59	10.78	7.85	7.62	10.75	-4.39	6.65
		6845	179	8.80	7.83	11.35	8.21	7.37	10.82	8.23	7.63	10.95	-4.39	6.96
[HE40]	UNII5	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
		RU Index : Low			RU Index : Mid			RU Index : High						
		ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]		
	UNII7	5965	3	7.69	7.87	10.79	7.35	7.51	10.44	7.73	7.91	10.83	-3.46	7.37
		6165	43	9.03	8.09	11.60	8.87	7.90	11.42	9.23	8.23	11.77	-3.46	8.31
		6405	91	8.64	9.05	11.86	8.29	8.73	11.53	8.47	8.77	11.63	-3.46	8.40
	UNII7	6565	123	8.93	7.91	11.46	8.55	7.68	11.14	8.77	7.89	11.37	-4.39	7.07
		6685	147	8.41	7.78	11.12	8.04	7.52	10.80	8.05	7.65	10.87	-4.39	6.73
		6845	179	8.88	7.76	11.37	8.40	7.39	10.93	8.41	7.59	11.03	-4.39	6.98

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE40]	UNII5	5965	3	7.63	7.85	10.75	7.38	7.61	10.51	7.72	7.88	10.81	-3.46	7.35
		6165	43	9.07	8.14	11.64	8.91	7.95	11.47	9.24	8.22	11.77	-3.46	8.31
		6405	91	8.64	9.05	11.86	8.43	8.82	11.64	8.46	8.82	11.66	-3.46	8.40
106T	UNII7	6565	123	8.93	7.93	11.47	8.70	7.72	11.25	8.78	7.91	11.38	-4.39	7.08
		6685	147	8.34	7.80	11.09	8.12	7.65	10.90	8.09	7.70	10.91	-4.39	6.70
		6845	179	8.89	7.82	11.40	8.56	7.54	11.09	8.40	7.60	11.03	-4.39	7.01

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE40]	UNII5	5965	3	8.01	8.19	11.11	-	-	-	8.03	8.20	11.12	-3.46	7.66
		6165	43	8.96	8.00	11.51	-	-	-	9.05	8.08	11.60	-3.46	8.14
		6405	91	8.46	8.95	11.73	-	-	-	8.37	8.78	11.59	-3.46	8.26
242T	UNII7	6565	123	9.18	8.24	11.75	-	-	-	9.08	8.19	11.67	-4.39	7.36
		6685	147	8.82	8.25	11.55	-	-	-	8.60	8.16	11.39	-4.39	7.16
		6845	179	9.15	8.14	11.68	-	-	-	8.81	8.03	11.45	-4.39	7.29

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE40]	UNII5	5965	3	-	-	-	8.06	8.26	11.17	-	-	-	-3.46	7.71
		6165	43	-	-	-	9.08	8.11	11.63	-	-	-	-3.46	8.17
		6405	91	-	-	-	8.47	8.94	11.73	-	-	-	-3.46	8.26
484T	UNII7	6565	123	-	-	-	9.20	8.29	11.78	-	-	-	-4.39	7.39
		6685	147	-	-	-	8.77	8.26	11.54	-	-	-	-4.39	7.15
		6845	179	-	-	-	9.07	8.17	11.65	-	-	-	-4.39	7.26
Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE40]	UNII5	5965	3	-	-	-	8.63	8.48	11.57	-	-	-	-3.46	8.11
		6165	43	-	-	-	9.57	8.83	12.23	-	-	-	-3.46	8.76
		6405	91	-	-	-	9.23	9.62	12.44	-	-	-	-3.46	8.98
SU	UNII7	6565	123	-	-	-	9.42	8.47	11.98	-	-	-	-4.39	7.59
		6685	147	-	-	-	9.04	8.37	11.73	-	-	-	-4.39	7.34
		6845	179	-	-	-	9.29	8.28	11.83	-	-	-	-4.39	7.44

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80] 26T	UNII5	5985	7	7.60	7.92	10.77	7.50	7.83	10.68	7.97	8.06	11.02	-3.46	7.56
		6145	39	9.04	8.36	11.72	8.85	7.80	11.36	9.28	8.24	11.80	-3.46	8.34
		6385	87	8.38	8.81	11.61	8.14	8.48	11.32	8.27	8.71	11.51	-3.46	8.15
	UNII7	6625	135	8.86	8.64	11.76	8.09	7.73	10.92	8.15	7.89	11.03	-4.39	7.37
		6705	151	8.33	7.68	11.03	7.67	7.31	10.51	7.62	7.22	10.43	-4.39	6.64
		6785	167	8.77	7.66	11.26	8.24	7.45	10.88	8.34	7.75	11.07	-4.39	6.87

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80] 52T	UNII5	5985	7	7.58	7.98	10.79	7.52	7.76	10.65	7.93	8.04	11.00	-3.46	7.54
		6145	39	9.04	8.27	11.68	8.90	7.90	11.44	9.29	8.21	11.80	-3.46	8.33
		6385	87	8.41	8.75	11.59	8.17	8.59	11.40	8.33	8.63	11.49	-3.46	8.13
	UNII7	6625	135	8.86	8.59	11.74	8.21	7.82	11.03	8.24	7.91	11.09	-4.39	7.35
		6705	151	8.29	7.71	11.02	7.82	7.26	10.56	7.64	7.16	10.42	-4.39	6.63
		6785	167	8.77	7.58	11.22	8.37	7.50	10.97	8.42	7.74	11.11	-4.39	6.83

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]								Directional Gain	Maximum E.I.R.P	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80] 106T	UNII5	5985	7	7.61	7.86	10.75	7.57	7.83	10.71	7.91	8.07	11.00	-3.46	7.54
		6145	39	9.17	8.26	11.75	8.97	7.90	11.48	9.33	8.23	11.83	-3.46	8.36
		6385	87	8.56	8.72	11.65	8.27	8.61	11.45	8.39	8.67	11.54	-3.46	8.19
	UNII7	6625	135	8.91	8.60	11.77	8.27	7.81	11.06	8.25	7.85	11.06	-4.39	7.38
		6705	151	8.38	7.73	11.08	7.78	7.36	10.59	7.64	7.09	10.38	-4.39	6.69
		6785	167	8.90	7.68	11.34	8.41	7.64	11.06	8.41	7.74	11.10	-4.39	6.95
[HE80] 242T	UNII5	5985	7	8.15	8.29	11.23	8.05	8.14	11.11	8.57	8.61	11.60	-3.46	8.14
		6145	39	9.11	8.34	11.76	8.95	7.99	11.51	9.23	8.22	11.76	-3.46	8.30
		6385	87	8.48	8.76	11.63	8.30	8.67	11.50	8.33	8.74	11.55	-3.46	8.17
	UNII7	6625	135	9.31	9.06	12.20	9.04	8.70	11.88	8.79	8.41	11.62	-4.39	7.81
		6705	151	8.94	8.23	11.61	8.61	8.01	11.33	8.34	7.77	11.08	-4.39	7.22
		6785	167	9.36	8.18	11.82	9.09	8.04	11.61	9.00	8.33	11.68	-4.39	7.43

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80]	UNII5	5985	7	8.11	8.19	11.16	-	-	-	8.48	8.47	11.49	-3.46	8.02
		6145	39	9.01	8.17	11.62	-	-	-	9.09	8.05	11.61	-3.46	8.16
		6385	87	8.37	8.68	11.54	-	-	-	8.27	8.69	11.49	-3.46	8.07
484T	UNII7	6625	135	8.99	8.68	11.85	-	-	-	8.56	8.16	11.37	-4.39	7.46
		6705	151	8.55	7.93	11.26	-	-	-	8.14	7.58	10.88	-4.39	6.87
		6785	167	9.04	7.90	11.51	-	-	-	8.75	8.00	11.40	-4.39	7.12

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80]	UNII5	5985	7	-	-	-	8.27	8.31	11.30	-	-	-	-3.46	7.84
		6145	39	-	-	-	9.05	8.06	11.59	-	-	-	-3.46	8.13
		6385	87	-	-	-	8.30	8.71	11.52	-	-	-	-3.46	8.06
996T	UNII7	6625	135	-	-	-	8.88	8.55	11.73	-	-	-	-4.39	7.34
		6705	151	-	-	-	8.47	7.90	11.20	-	-	-	-4.39	6.81
		6785	167	-	-	-	9.01	8.08	11.58	-	-	-	-4.39	7.19

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80]	UNII5	5985	7	-	-	-	8.72	8.61	11.68	-	-	-	-3.46	8.22
		6145	39	-	-	-	9.63	8.85	12.27	-	-	-	-3.46	8.81
		6385	87	-	-	-	9.17	9.54	12.37	-	-	-	-3.46	8.91
SU	UNII7	6625	135	-	-	-	9.13	8.88	12.01	-	-	-	-4.39	7.62
		6705	151	-	-	-	8.83	8.22	11.54	-	-	-	-4.39	7.15
		6785	167	-	-	-	9.23	8.49	11.89	-	-	-	-4.39	7.50

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80L]	UNII5	6025	15	7.17	7.74	10.47	7.48	7.86	10.69	7.73	7.73	10.74	-3.46	7.28
		6185	47	8.21	7.60	10.93	8.25	7.50	10.90	8.33	7.60	10.99	-3.46	7.53
		6345	79	8.49	8.98	11.75	8.56	9.00	11.80	7.95	8.51	11.25	-3.46	8.34
	UNII7	6665	143	9.12	8.13	11.67	8.66	7.51	11.13	8.37	7.09	10.79	-4.39	7.28

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80L] 52T	UNII5	6025	15	7.17	7.74	10.47	7.49	7.91	10.72	7.79	7.97	10.89	-3.46	7.43
		6185	47	8.17	7.77	10.98	8.25	7.59	10.94	8.22	7.55	10.90	-3.46	7.52
		6345	79	8.51	9.07	11.81	8.49	9.13	11.83	7.97	8.49	11.25	-3.46	8.37
	UNII7	6665	143	9.02	8.11	11.60	8.54	7.56	11.09	8.39	7.31	10.89	-4.39	7.21

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80L] 106T	UNII5	6025	15	7.16	7.64	10.42	7.50	7.98	10.76	7.56	7.87	10.73	-3.46	7.30
		6185	47	8.09	7.80	10.96	8.22	7.59	10.92	8.19	7.49	10.86	-3.46	7.50
		6345	79	8.50	9.09	11.82	8.26	8.97	11.64	8.07	8.46	11.28	-3.46	8.36
	UNII7	6665	143	8.96	8.06	11.54	8.49	7.45	11.01	8.23	7.15	10.73	-4.39	7.15

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80L] 242T	UNII5	6025	15	7.77	8.14	10.97	7.86	8.15	11.02	8.24	8.34	11.30	-3.46	7.84
		6185	47	8.91	8.41	11.68	8.92	8.28	11.62	8.73	7.99	11.39	-3.46	8.22
		6345	79	8.57	9.15	11.88	8.48	9.19	11.86	8.10	8.57	11.35	-3.46	8.42
	UNII7	6665	143	9.11	8.23	11.70	8.85	7.94	11.43	8.25	7.20	10.76	-4.39	7.31

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80L] 484T	UNII5	6025	15	7.76	8.12	10.95	-	-	-	8.06	8.33	11.21	-3.46	7.75
		6185	47	8.88	8.29	11.61	-	-	-	8.75	7.92	11.37	-3.46	8.14
		6345	79	8.52	9.09	11.82	-	-	-	8.21	8.77	11.51	-3.46	8.36
	UNII7	6665	143	8.90	7.94	11.46	-	-	-	8.33	7.23	10.82	-4.39	7.07
Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80L] 996T	UNII5	6025	15	-	-	-	7.91	8.16	11.05	-	-	-	-3.46	7.58
		6185	47	-	-	-	8.75	8.03	11.41	-	-	-	-3.46	7.95
		6345	79	-	-	-	8.28	8.84	11.58	-	-	-	-3.46	8.12
	UNII7	6665	143	-	-	-	9.18	8.09	11.68	-	-	-	-4.39	7.29

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80U] 26T	UNII5	6025	15	7.77	7.83	10.81	8.02	7.88	10.96	8.60	8.46	11.54	-3.46	8.08
		6185	47	8.31	7.51	10.94	8.73	7.89	11.34	8.71	7.79	11.29	-3.46	7.88
		6345	79	7.95	8.31	11.15	7.83	8.40	11.13	7.62	8.10	10.88	-3.46	7.69
	UNII7	6665	143	8.32	7.13	10.78	8.11	7.16	10.67	7.76	6.87	10.35	-4.39	6.39

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80U] 52T	UNII5	6025	15	7.66	7.93	10.81	8.10	8.01	11.07	8.46	8.31	11.39	-3.46	7.93
		6185	47	8.35	7.55	10.98	8.74	7.75	11.28	8.59	7.50	11.09	-3.46	7.82
		6345	79	7.94	8.17	11.07	7.97	8.27	11.13	7.67	8.05	10.88	-3.46	7.67
	UNII7	6665	143	8.28	7.00	10.70	8.16	6.95	10.61	7.71	6.70	10.25	-4.39	6.31

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80U] 106T	UNII5	6025	15	7.67	7.80	10.75	7.99	7.85	10.93	8.45	8.27	11.37	-3.46	7.91
		6185	47	8.30	7.36	10.87	8.79	7.62	11.26	8.62	7.49	11.10	-3.46	7.79
		6345	79	7.88	8.13	11.02	7.73	8.24	11.00	7.60	8.02	10.82	-3.46	7.56
	UNII7	6665	143	8.24	7.10	10.72	7.93	7.00	10.50	7.68	6.70	10.23	-4.39	6.33

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80U] 242T	UNII5	6025	15	8.40	8.33	11.37	8.51	8.34	11.44	9.18	8.99	12.10	-3.46	8.64
		6185	47	9.05	8.24	11.68	9.23	8.30	11.80	9.29	8.18	11.78	-3.46	8.34
		6345	79	7.90	8.18	11.05	7.83	8.14	11.00	7.76	8.22	11.01	-3.46	7.59
	UNII7	6665	143	8.24	6.99	10.67	8.12	7.07	10.64	7.82	6.79	10.34	-4.39	6.28
Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80U] 484T	UNII5	6025	15	8.37	8.28	11.33	-	-	-	9.01	8.80	11.91	-3.46	8.45
		6185	47	9.07	8.16	11.65	-	-	-	9.25	8.22	11.77	-3.46	8.31
		6345	79	7.79	8.11	10.96	-	-	-	7.75	8.17	10.98	-3.46	7.51
	UNII7	6665	143	8.10	6.92	10.56	-	-	-	7.86	6.77	10.36	-4.39	6.17

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE80U] 996T	UNII5	6025	15	-	-	-	8.67	8.51	11.60	-	-	-	-3.46	8.14
		6185	47	-	-	-	9.09	8.16	11.66	-	-	-	-3.46	8.20
		6345	79	-	-	-	7.78	8.02	10.92	-	-	-	-3.46	7.45
	UNII7	6665	143	-	-	-	8.58	7.57	11.12	-	-	-	-4.39	6.73

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE160] 996*2T	UNII5	6025	15	-	-	-	7.96	8.46	11.23	-	-	-	-3.46	7.76
		6185	47	-	-	-	8.52	8.14	11.34	-	-	-	-3.46	7.88
		6345	79	-	-	-	8.17	9.04	11.64	-	-	-	-3.46	8.18
	UNII7	6665	143	-	-	-	8.62	7.94	11.30	-	-	-	-4.39	6.91

Mode	Band	Freq.[MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
[HE160] SU	UNII5	6025	15	-	-	-	8.78	8.67	11.73	-	-	-	-3.46	8.27
		6185	47	-	-	-	9.28	8.37	11.86	-	-	-	-3.46	8.39
		6345	79	-	-	-	9.21	9.42	12.33	-	-	-	-3.46	8.86
	UNII7	6665	143	-	-	-	9.34	8.20	11.82	-	-	-	-4.39	7.43

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average Power [dBm]									Directional Gain	Maximum E.I.R.P
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm]
802.11a	UNII5	5935	2	-	-	-	8.42	8.39	11.42	-	-	-	-3.46	7.96
		6175	45	-	-	-	9.52	8.75	12.16	-	-	-	-3.46	8.70
		6415	93	-	-	-	9.00	9.47	12.25	-	-	-	-3.46	8.79
	UNII7	6535	117	-	-	-	8.84	8.37	11.62	-	-	-	-4.39	7.23
		6695	149	-	-	-	8.85	8.24	11.57	-	-	-	-4.39	7.18
		6855	181	-	-	-	8.86	8.22	11.56	-	-	-	-4.39	7.17

#### 10.4 POWER SPECTRAL DENSITY(Indoor client)

- Limit : -1 dBm/MHz(e.i.r.p)

##### 10.4.1 Ant 1

- EIRP PSD (dBm /MHz) = PSD (dBm/MHz) + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 26T	UNII5	5935	2	-5.709	-7.039	-5.769	-5.80	-11.509
		6175	45	-2.766	-4.037	-2.698	-5.80	-8.498
		6415	93	-4.018	-5.208	-3.975	-5.80	-9.775
	UNII6	6435	97	-2.353	-4.156	-2.623	-6.80	-9.153
		6475	105	-2.964	-4.455	-3.051	-6.80	-9.764
		6515	113	-2.941	-4.655	-3.226	-6.80	-9.741
	UNII7	6535	117	-3.664	-5.368	-3.952	-7.40	-11.064
		6695	149	-2.236	-3.624	-2.332	-7.40	-9.636
		6855	181	-2.545	-4.064	-2.885	-7.40	-9.945
	UNII8	6875	185	-2.882	-4.581	-3.210	-8.50	-11.382
		6995	209	-2.676	-4.586	-3.104	-8.50	-11.176
		7115	233	-3.097	-4.517	-3.185	-8.50	-11.597

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 52T	UNII5	5935	2	-5.640	-5.784	-5.955	-5.80	-11.440
		6175	45	-2.804	-3.028	-2.723	-5.80	-8.523
		6415	93	-2.067	-2.255	-2.246	-5.80	-7.867
	UNII6	6435	97	-2.224	-2.500	-2.374	-6.80	-9.024
		6475	105	-2.363	-2.591	-2.231	-6.80	-9.031
		6515	113	-1.874	-2.100	-2.197	-6.80	-8.674
	UNII7	6535	117	-2.028	-2.354	-1.938	-7.40	-9.338
		6695	149	-2.102	-2.122	-2.044	-7.40	-9.444
		6855	181	-2.271	-2.565	-2.583	-7.40	-9.671
	UNII8	6875	185	-2.451	-2.647	-2.718	-8.50	-10.951
		6995	209	-2.211	-2.386	-2.514	-8.50	-10.711
		7115	233	-3.085	-3.397	-3.054	-8.50	-11.554

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE20] 106T	UNII5	5935	2	-5.315	-	-5.619	-5.80	-11.115
		6175	45	-2.727	-	-2.683	-5.80	-8.483
		6415	93	-1.909	-	-1.867	-5.80	-7.667
	UNII6	6435	97	-1.814	-	-2.285	-6.80	-8.614
		6475	105	-2.398	-	-2.321	-6.80	-9.121
		6515	113	-1.924	-	-2.169	-6.80	-8.724
	UNII7	6535	117	-2.250	-	-2.335	-7.40	-9.650
		6695	149	-1.924	-	-2.147	-7.40	-9.324
		6855	181	-2.238	-	-2.328	-7.40	-9.638
	UNII8	6875	185	-2.317	-	-2.453	-8.50	-10.817
		6995	209	-2.084	-	-2.304	-8.50	-10.584
		7115	233	-2.976	-	-3.228	-8.50	-11.476

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE20] 242T	UNII5	5935	2	-	-5.777	-	-5.80	-11.577
		6175	45	-	-2.725	-	-5.80	-8.525
		6415	93	-	-2.354	-	-5.80	-8.154
	UNII6	6435	97	-	-2.552	-	-6.80	-9.352
		6475	105	-	-2.735	-	-6.80	-9.535
		6515	113	-	-2.524	-	-6.80	-9.324
	UNII7	6535	117	-	-2.534	-	-7.40	-9.934
		6695	149	-	-2.515	-	-7.40	-9.915
		6855	181	-	-2.318	-	-7.40	-9.718
	UNII8	6875	185	-	-2.554	-	-8.50	-11.054
		6995	209	-	-2.710	-	-8.50	-11.210
		7115	233	-	-3.787	-	-8.50	-12.287

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE20] SU	UNII5	5935	2	-	-1.844	-	-5.80	-7.644
		6175	45	-	-2.151	-	-5.80	-7.951
		6415	93	-	-2.428	-	-5.80	-8.228
	UNII6	6435	97	-	-2.506	-	-6.80	-9.306
		6475	105	-	-2.914	-	-6.80	-9.714
		6515	113	-	-2.665	-	-6.80	-9.465
	UNII7	6535	117	-	-2.800	-	-7.40	-10.200
		6695	149	-	-2.582	-	-7.40	-9.982
		6855	181	-	-2.575	-	-7.40	-9.975
	UNII8	6875	185	-	-2.728	-	-8.50	-11.228
		6995	209	-	-2.798	-	-8.50	-11.298
		7115	233	-	-3.798	-	-8.50	-12.298

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE40] 26T	UNII5	5965	3	-2.727	-3.313	-3.038	-5.80	-8.527
		6165	43	-2.061	-2.895	-2.427	-5.80	-7.861
		6405	91	-2.303	-2.707	-2.381	-5.80	-8.103
	UNII6	6445	99	-2.310	-2.938	-2.539	-6.80	-9.110
		6485	107	-2.584	-2.924	-2.960	-6.80	-9.384
		6525	115	-2.833	-3.381	-3.106	-6.80	-9.633
	UNII7	6565	123	-3.899	-4.168	-4.291	-7.40	-11.299
		6685	147	-2.543	-2.707	-2.705	-7.40	-9.943
		6845	179	-2.652	-3.137	-3.160	-7.40	-10.052
	UNII8	6885	187	-2.657	-3.393	-3.297	-8.50	-11.157
		7005	211	-2.692	-3.089	-3.325	-8.50	-11.192
		7085	227	-2.972	-3.942	-4.003	-8.50	-11.472

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE40] 52T	UNII5	5965	3	-2.444	-2.711	-2.479	-5.80	-8.244
		6165	43	-2.519	-2.891	-2.519	-5.80	-8.319
		6405	91	-2.942	-3.217	-3.197	-5.80	-8.742
	UNII6	6445	99	-2.093	-2.471	-2.328	-6.80	-8.893
		6485	107	-1.967	-1.892	-1.886	-6.80	-8.686
		6525	115	-1.904	-2.135	-1.916	-6.80	-8.704
	UNII7	6565	123	-1.643	-1.992	-1.836	-7.40	-9.043
		6685	147	-1.832	-2.299	-2.201	-7.40	-9.232
		6845	179	-2.072	-2.618	-2.461	-7.40	-9.472
	UNII8	6885	187	-2.446	-3.005	-2.938	-8.50	-10.946
		7005	211	-1.928	-2.500	-2.575	-8.50	-10.428
		7085	227	-2.902	-3.321	-3.289	-8.50	-11.402

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE40] 106T	UNII5	5965	3	-2.896	-3.189	-2.870	-5.80	-8.670
		6165	43	-2.685	-2.695	-2.704	-5.80	-8.485
		6405	91	-2.953	-3.256	-3.033	-5.80	-8.753
	UNII6	6445	99	-2.133	-2.381	-2.373	-6.80	-8.933
		6485	107	-1.822	-1.915	-2.033	-6.80	-8.622
		6525	115	-1.995	-2.181	-2.333	-6.80	-8.795
	UNII7	6565	123	-1.858	-2.153	-2.089	-7.40	-9.258
		6685	147	-1.904	-2.224	-2.267	-7.40	-9.304
		6845	179	-1.878	-2.359	-2.293	-7.40	-9.278
	UNII8	6885	187	-2.425	-2.639	-2.799	-8.50	-10.925
		7005	211	-2.056	-2.486	-2.395	-8.50	-10.556
		7085	227	-2.693	-2.904	-2.986	-8.50	-11.193

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE40] 242T	UNII5	5965	3	-3.850	-	-3.799	-5.80	-9.599
		6165	43	-2.823	-	-2.917	-5.80	-8.623
		6405	91	-3.607	-	-3.693	-5.80	-9.407
	UNII6	6445	99	-3.126	-	-3.416	-6.80	-9.926
		6485	107	-2.982	-	-3.260	-6.80	-9.782
		6525	115	-3.140	-	-3.261	-6.80	-9.940
	UNII7	6565	123	-2.785	-	-2.917	-7.40	-10.185
		6685	147	-3.172	-	-3.397	-7.40	-10.572
		6845	179	-2.713	-	-3.198	-7.40	-10.113
	UNII8	6885	187	-3.169	-	-3.462	-8.50	-11.669
		7005	211	-3.189	-	-3.475	-8.50	-11.689
		7085	227	-4.153	-	-4.545	-8.50	-12.653

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE40] 484T	UNII5	5965	3	-	-6.791	-	-5.80	-12.591
		6165	43	-	-5.905	-	-5.80	-11.705
		6405	91	-	-6.456	-	-5.80	-12.256
	UNII6	6445	99	-	-6.130	-	-6.80	-12.930
		6485	107	-	-5.976	-	-6.80	-12.776
		6525	115	-	-5.936	-	-6.80	-12.736
	UNII7	6565	123	-	-5.732	-	-7.40	-13.132
		6685	147	-	-5.953	-	-7.40	-13.353
		6845	179	-	-5.574	-	-7.40	-12.974
	UNII8	6885	187	-	-6.094	-	-8.50	-14.594
		7005	211	-	-6.139	-	-8.50	-14.639
		7085	227	-	-7.179	-	-8.50	-15.679

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE40] SU	UNII5	5965	3	-	-6.111	-	-5.80	-11.911
		6165	43	-	-5.156	-	-5.80	-10.956
		6405	91	-	-5.358	-	-5.80	-11.158
	UNII6	6445	99	-	-5.710	-	-6.80	-12.510
		6485	107	-	-5.326	-	-6.80	-12.126
		6525	115	-	-5.522	-	-6.80	-12.322
	UNII7	6565	123	-	-5.216	-	-7.40	-12.616
		6685	147	-	-5.471	-	-7.40	-12.871
		6845	179	-	-5.311	-	-7.40	-12.711
	UNII8	6885	187	-	-5.585	-	-8.50	-14.085
		7005	211	-	-5.783	-	-8.50	-14.283
		7085	227	-	-6.693	-	-8.50	-15.193

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] 26T	UNII5	5985	7	-2.765	-4.095	-2.048	-5.80	-7.848
		6145	39	-2.407	-3.728	-2.585	-5.80	-8.207
		6385	87	-2.706	-4.252	-2.620	-5.80	-8.420
	UNII6	6465	103	-2.597	-4.382	-2.774	-6.80	-9.397
		6545	119	-3.114	-4.655	-3.314	-6.80	-9.914
	UNII7	6625	135	-3.390	-5.077	-3.993	-7.40	-10.790
		6705	151	-2.493	-3.977	-2.873	-7.40	-9.893
		6785	167	-2.835	-4.355	-2.915	-7.40	-10.235
	UNII8	6865	183	-2.659	-4.478	-3.520	-8.50	-11.159
		6945	199	-2.273	-4.105	-3.446	-8.50	-10.773
		7025	215	-2.596	-4.414	-3.905	-8.50	-11.096

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] 52T	UNII5	5985	7	-2.795	-2.521	-2.052	-5.80	-7.852
		6145	39	-2.700	-2.793	-2.469	-5.80	-8.269
		6385	87	-2.131	-2.385	-2.164	-5.80	-7.931
	UNII6	6465	103	-2.223	-2.490	-2.455	-6.80	-9.023
		6545	119	-2.284	-3.088	-2.853	-6.80	-9.084
	UNII7	6625	135	-2.888	-3.492	-3.264	-7.40	-10.288
		6705	151	-1.909	-2.542	-2.454	-7.40	-9.309
		6785	167	-1.978	-2.201	-2.415	-7.40	-9.378
	UNII8	6865	183	-2.018	-2.583	-3.057	-8.50	-10.518
		6945	199	-1.844	-2.504	-2.737	-8.50	-10.344
		7025	215	-2.141	-2.807	-2.922	-8.50	-10.641

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] 106T	UNII5	5985	7	-2.755	-3.118	-2.599	-5.80	-8.399
		6145	39	-2.716	-2.806	-2.486	-5.80	-8.286
		6385	87	-3.187	-3.500	-3.351	-5.80	-8.987
	UNII6	6465	103	-2.303	-2.699	-2.629	-6.80	-9.103
		6545	119	-2.646	-3.293	-3.182	-6.80	-9.446
	UNII7	6625	135	-2.925	-3.633	-3.737	-7.40	-10.325
		6705	151	-2.051	-2.691	-2.646	-7.40	-9.451
		6785	167	-2.184	-2.456	-2.565	-7.40	-9.584
	UNII8	6865	183	-1.839	-2.894	-2.913	-8.50	-10.339
		6945	199	-2.026	-2.647	-2.728	-8.50	-10.526
		7025	215	-2.105	-2.767	-3.112	-8.50	-10.605

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] 242T	UNII5	5985	7	-3.879	-3.999	-3.334	-5.80	-9.134
		6145	39	-2.915	-2.889	-2.694	-5.80	-8.494
		6385	87	-3.698	-3.886	-3.821	-5.80	-9.498
	UNII6	6465	103	-3.141	-3.517	-3.418	-6.80	-9.941
		6545	119	-2.979	-3.371	-3.525	-6.80	-9.779
	UNII7	6625	135	-2.858	-3.068	-3.504	-7.40	-10.258
		6705	151	-3.217	-3.592	-3.891	-7.40	-10.617
		6785	167	-2.749	-2.996	-3.363	-7.40	-10.149
	UNII8	6865	183	-2.988	-3.399	-3.539	-8.50	-11.488
		6945	199	-2.989	-3.267	-3.719	-8.50	-11.489
		7025	215	-3.189	-3.555	-4.135	-8.50	-11.689

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] 484T	UNII5	5985	7	-7.015	-	-6.467	-5.80	-12.267
		6145	39	-5.865	-	-5.893	-5.80	-11.665
		6385	87	-6.744	-	-6.905	-5.80	-12.544
	UNII6	6465	103	-6.345	-	-6.506	-6.80	-13.145
		6545	119	-6.034	-	-6.629	-6.80	-12.834
	UNII7	6625	135	-5.805	-	-6.238	-7.40	-13.205
		6705	151	-6.257	-	-6.863	-7.40	-13.657
		6785	167	-5.800	-	-6.280	-7.40	-13.200
	UNII8	6865	183	-5.837	-	-6.608	-8.50	-14.337
		6945	199	-5.637	-	-6.408	-8.50	-14.137
		7025	215	-6.170	-	-6.926	-8.50	-14.670

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] 996T	UNII5	5985	7	-	-9.562	-	-5.80	-15.362
		6145	39	-	-8.931	-	-5.80	-14.731
		6385	87	-	-9.903	-	-5.80	-15.703
	UNII6	6465	103	-	-9.472	-	-6.80	-16.272
		6545	119	-	-9.223	-	-6.80	-16.023
	UNII7	6625	135		-8.990		-7.40	-16.390
		6705	151	-	-9.192	-	-7.40	-16.592
		6785	167		-8.978		-7.40	-16.378
	UNII8	6865	183	-	-8.889	-	-8.50	-17.389
		6945	199	-	-8.898	-	-8.50	-17.398
		7025	215	-	-9.250	-	-8.50	-17.750

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80] SU	UNII5	5985	7	-	-9.143	-	-5.80	-14.943
		6145	39	-	-8.073	-	-5.80	-13.873
		6385	87	-	-8.639	-	-5.80	-14.439
	UNII6	6465	103	-	-8.919	-	-6.80	-15.719
		6545	119	-	-8.289	-	-6.80	-15.089
	UNII7	6625	135		-8.593		-7.40	-15.993
		6705	151	-	-9.028	-	-7.40	-16.428
		6785	167		-8.721		-7.40	-16.121
	UNII8	6865	183	-	-8.897	-	-8.50	-17.397
		6945	199	-	-8.746	-	-8.50	-17.246
		7025	215	-	-9.079	-	-8.50	-17.579

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80L] 26T	UNII5	6025	15	-3.856	-5.120	-3.959	-5.80	-9.656
		6185	47	-2.637	-3.900	-2.582	-5.80	-8.382
		6345	79	-2.143	-3.374	-2.721	-5.80	-7.943
	UNII6	6505	111	-2.592	-4.532	-3.230	-6.80	-9.392
	UNII7	6665	143	-3.540	-4.921	-3.946	-7.40	-10.940
	UNII8	6825	175	-2.745	-3.674	-3.074	-8.50	-11.245
		6985	207	-2.611	-4.480	-4.161	-8.50	-11.111

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80L] 52T	UNII5	6025	15	-3.292	-3.188	-2.961	-5.80	-8.761
		6185	47	-2.428	-2.419	-2.313	-5.80	-8.113
		6345	79	-3.066	-3.091	-3.263	-5.80	-8.866
	UNII6	6505	111	-2.780	-3.185	-3.559	-6.80	-9.580
	UNII7	6665	143	-2.320	-3.063	-3.269	-7.40	-9.720
	UNII8	6825	175	-2.545	-2.889	-3.596	-8.50	-11.045
		6985	207	-2.212	-3.184	-3.972	-8.50	-10.712

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80L] 106T	UNII5	6025	15	-3.606	-3.381	-3.013	-5.80	-8.813
		6185	47	-2.411	-2.566	-2.610	-5.80	-8.211
		6345	79	-3.168	-3.044	-3.392	-5.80	-8.844
	UNII6	6505	111	-2.975	-3.381	-3.509	-6.80	-9.775
	UNII7	6665	143	-2.624	-3.117	-3.470	-7.40	-10.024
	UNII8	6825	175	-2.704	-3.503	-3.676	-8.50	-11.204
		6985	207	-2.365	-3.289	-3.738	-8.50	-10.865

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80L] 242T	UNII5	6025	15	-4.353	-4.240	-3.801	-5.80	-9.601
		6185	47	-3.043	-3.256	-3.482	-5.80	-8.843
		6345	79	-3.507	-3.557	-3.841	-5.80	-9.307
	UNII6	6505	111	-3.378	-3.460	-4.144	-6.80	-10.178
	UNII7	6665	143	-2.903	-2.976	-3.765	-7.40	-10.303
	UNII8	6825	175	-2.951	-3.006	-3.890	-8.50	-11.451
		6985	207	-2.525	-2.827	-4.190	-8.50	-11.025

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80L] 484T	UNII5	6025	15	-7.298	-	-6.897	-5.80	-12.697
		6185	47	-6.150	-	-6.444	-5.80	-11.950
		6345	79	-6.582	-	-6.489	-5.80	-12.289
	UNII6	6505	111	-6.402	-	-6.771	-6.80	-13.202
	UNII7	6665	143	-6.060	-	-6.766	-7.40	-13.460
	UNII8	6825	175	-6.245	-	-6.474	-8.50	-14.745
		6985	207	-5.684	-	-6.884	-8.50	-14.184

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80L] 996T	UNII5	6025	15	-	-10.143	-	-5.80	-15.943
		6185	47	-	-9.401	-	-5.80	-15.201
		6345	79	-	-9.698	-	-5.80	-15.498
	UNII6	6505	111	-	-9.070	-	-6.80	-15.870
	UNII7	6665	143	-	-8.640	-	-7.40	-16.040
	UNII8	6825	175	-	-8.651	-	-8.50	-17.151
		6985	207	-	-8.720	-	-8.50	-17.220

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80U] 26T	UNII5	6025	15	-3.404	-4.452	-2.814	-5.80	-8.614
		6185	47	-2.769	-3.694	-2.440	-5.80	-8.240
		6345	79	-2.797	-4.096	-3.107	-5.80	-8.597
	UNII6	6505	111	-3.480	-4.469	-3.449	-6.80	-10.249
	UNII7	6665	143	-3.897	-5.235	-4.463	-7.40	-11.297
	UNII8	6825	175	-2.953	-4.398	-3.802	-8.50	-11.453
		6985	207	-4.322	-5.834	-5.691	-8.50	-12.822

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80U] 52T	UNII5	6025	15	-2.721	-2.452	-2.127	-5.80	-7.927
		6185	47	-2.287	-2.080	-2.225	-5.80	-7.880
		6345	79	-3.719	-3.317	-4.123	-5.80	-9.117
	UNII6	6505	111	-3.667	-3.732	-3.760	-6.80	-10.467
	UNII7	6665	143	-3.350	-3.440	-3.802	-7.40	-10.750
	UNII8	6825	175	-3.550	-4.378	-4.419	-8.50	-12.050
		6985	207	-4.254	-4.287	-4.634	-8.50	-12.754

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80U] 106T	UNII5	6025	15	-3.054	-2.439	-2.106	-5.80	-7.906
		6185	47	-2.808	-2.288	-2.183	-5.80	-7.983
		6345	79	-3.870	-4.002	-3.916	-5.80	-9.670
	UNII6	6505	111	-3.574	-3.731	-3.821	-6.80	-10.374
	UNII7	6665	143	-3.246	-3.718	-4.012	-7.40	-10.646
	UNII8	6825	175	-3.885	-4.353	-4.861	-8.50	-12.385
		6985	207	-4.015	-4.246	-4.675	-8.50	-12.515

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80U] 242T	UNII5	6025	15	-3.868	-3.776	-3.124	-5.80	-8.924
		6185	47	-3.244	-2.979	-2.974	-5.80	-8.774
		6345	79	-4.223	-4.306	-4.380	-5.80	-10.023
	UNII6	6505	111	-4.234	-4.464	-4.210	-6.80	-11.010
	UNII7	6665	143	-3.915	-4.083	-4.227	-7.40	-11.315
	UNII8	6825	175	-4.253	-4.415	-5.196	-8.50	-12.753
		6985	207	-4.591	-4.539	-5.086	-8.50	-13.039

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80U] 484T	UNII5	6025	15	-6.875	-	-6.213	-5.80	-12.013
		6185	47	-6.044	-	-6.092	-5.80	-11.844
		6345	79	-7.183	-	-7.367	-5.80	-12.983
	UNII6	6505	111	-7.336	-	-7.201	-6.80	-14.001
	UNII7	6665	143	-6.862	-	-7.065	-7.40	-14.262
	UNII8	6825	175	-7.168	-	-7.716	-8.50	-15.668
		6985	207	-7.583	-	-7.783	-8.50	-16.083

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE80U] 996T	UNII5	6025	15	-	-9.155	-	-5.80	-14.955
		6185	47	-	-9.039	-	-5.80	-14.839
		6345	79	-	-10.354	-	-5.80	-16.154
	UNII6	6505	111	-	-10.005	-	-6.80	-16.805
	UNII7	6665	143	-	-9.320	-	-7.40	-16.720
	UNII8	6825	175	-	-9.886	-	-8.50	-18.386
		6985	207	-	-10.237	-	-8.50	-18.737

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE160] 996*2T	UNII5	6025	15	-	-12.226	-	-5.80	-18.026
		6185	47	-	-11.707	-	-5.80	-17.507
		6345	79	-	-12.016	-	-5.80	-17.816
	UNII6	6505	111	-	-12.103	-	-6.80	-18.903
	UNII7	6665	143	-	-11.757	-	-7.40	-19.157
	UNII8	6825	175	-	-11.878	-	-8.50	-20.378
		6985	207	-	-11.906	-	-8.50	-20.406

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
[HE160] SU	UNII5	6025	15	-	-11.557	-	-5.80	-17.357
		6185	47	-	-11.294	-	-5.80	-17.094
		6345	79	-	-11.374	-	-5.80	-17.174
	UNII6	6505	111	-	-11.501	-	-6.80	-18.301
	UNII7	6665	143	-	-11.186	-	-7.40	-18.586
	UNII8	6825	175	-	-11.407	-	-8.50	-20.378
		6985	207	-	-11.531	-	-8.50	-20.031

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	[dBm/MHz]
802.11a	UNII5	5935	2	-	-1.863	-	-5.80	-7.663
		6175	45	-	-1.979	-	-5.80	-7.779
		6415	93	-	-2.033	-	-5.80	-7.833
	UNII6	6435	97	-	-2.222	-	-6.80	-9.022
		6475	105	-	-2.250	-	-6.80	-9.050
		6515	113	-	-2.165	-	-6.80	-8.965
	UNII7	6535	117	-	-2.443	-	-7.40	-9.843
		6695	149	-	-2.289	-	-7.40	-9.689
		6855	181	-	-2.099	-	-7.40	-9.499
	UNII8	6875	185	-	-2.422	-	-8.50	-10.922
		6995	209	-	-2.533	-	-8.50	-11.033
		7115	233	-	-3.604	-	-8.50	-12.104

#### 10.4.2 Ant 2

· EIRP PSD (dBm /MHz) = PSD (dBm/MHz) + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 26T	UNII5	5935	2	-6.495	-7.996	-6.720	-7.20	-13.695
		6175	45	-4.061	-5.616	-4.025	-7.20	-11.225
		6415	93	-4.394	-5.567	-4.215	-7.20	-11.415
	UNII6	6435	97	-2.739	-4.465	-3.093	-6.30	-9.039
		6475	105	-2.670	-3.875	-2.463	-6.30	-8.763
		6515	113	-2.506	-4.296	-2.921	-6.30	-8.806
	UNII7	6535	117	-2.518	-4.135	-2.587	-7.40	-9.918
		6695	149	-1.783	-3.385	-1.932	-7.40	-9.183
		6855	181	-1.797	-3.545	-2.113	-7.40	-9.197
	UNII8	6875	185	-2.162	-3.620	-2.127	-7.90	-10.027
		6995	209	-2.889	-4.426	-2.704	-7.90	-10.604
		7115	233	-2.439	-3.607	-2.286	-7.90	-10.186

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 52T	UNII5	5935	2	-6.317	-6.529	-6.489	-7.20	-13.517
		6175	45	-3.659	-3.772	-3.299	-7.20	-10.499
		6415	93	-1.555	-1.841	-1.815	-7.20	-8.755
	UNII6	6435	97	-2.336	-2.754	-2.603	-6.30	-8.636
		6475	105	-2.800	-3.010	-2.648	-6.30	-8.948
		6515	113	-2.192	-2.761	-2.689	-6.30	-8.492
	UNII7	6535	117	-2.745	-3.013	-2.926	-7.40	-10.145
		6695	149	-2.663	-2.924	-2.667	-7.40	-10.063
		6855	181	-3.088	-3.120	-2.921	-7.40	-10.321
	UNII8	6875	185	-2.646	-3.206	-2.964	-7.90	-10.546
		6995	209	-2.886	-3.042	-2.946	-7.90	-10.786
		7115	233	-2.754	-2.896	-2.684	-7.90	-10.584

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-6.992	-	-7.078	-7.20	-14.192
		6175	45	-3.164	-	-3.048	-7.20	-10.248
		6415	93	-1.629	-	-1.502	-7.20	-8.702
	UNII6	6435	97	-2.363	-	-2.509	-6.30	-8.663
		6475	105	-2.693	-	-2.637	-6.30	-8.937
		6515	113	-2.440	-	-2.711	-6.30	-8.740
	UNII7	6535	117	-2.853	-	-2.933	-7.40	-10.253
		6695	149	-3.047	-	-3.070	-7.40	-10.447
		6855	181	-2.687	-	-2.570	-7.40	-9.970
	UNII8	6875	185	-2.804	-	-2.517	-7.90	-10.417
		6995	209	-2.823	-	-2.964	-7.90	-10.723
		7115	233	-3.241	-	-3.088	-7.90	-10.988

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-	-7.464	-	-7.20	-14.664
		6175	45	-	-3.754	-	-7.20	-10.954
		6415	93	-	-2.108	-	-7.20	-9.308
	UNII6	6435	97	-	-2.946	-	-6.30	-9.246
		6475	105	-	-3.148	-	-6.30	-9.448
		6515	113	-	-2.805	-	-6.30	-9.105
	UNII7	6535	117	-	-3.119	-	-7.40	-10.519
		6695	149	-	-3.195	-	-7.40	-10.595
		6855	181	-	-3.429	-	-7.40	-10.829
	UNII8	6875	185	-	-3.374	-	-7.90	-11.274
		6995	209	-	-3.365	-	-7.90	-11.265
		7115	233	-	-3.359	-	-7.90	-11.259

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE20] SU	UNII5	5935	2	-	-3.452	-	-7.20	-10.652
		6175	45	-	-2.924	-	-7.20	-10.124
		6415	93	-	-2.071	-	-7.20	-9.271
	UNII6	6435	97	-	-3.005	-	-6.30	-9.305
		6475	105	-	-3.318	-	-6.30	-9.618
		6515	113	-	-3.166	-	-6.30	-9.466
	UNII7	6535	117	-	-3.138	-	-7.40	-10.538
		6695	149	-	-3.387	-	-7.40	-10.787
		6855	181	-	-3.288	-	-7.40	-10.688
	UNII8	6875	185	-	-3.375	-	-7.90	-11.275
		6995	209	-	-3.450	-	-7.90	-11.350
		7115	233	-	-3.391	-	-7.90	-11.291

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE40] 26T	UNII5	5965	3	-3.623	-4.277	-3.533	-7.20	-10.733
		6165	43	-3.692	-3.807	-3.208	-7.20	-10.408
		6405	91	-2.198	-2.220	-2.561	-7.20	-9.398
	UNII6	6445	99	-2.930	-3.495	-3.478	-6.30	-9.230
		6485	107	-3.767	-3.531	-3.586	-6.30	-9.831
		6525	115	-2.675	-3.029	-3.259	-6.30	-8.975
	UNII7	6565	123	-2.881	-3.178	-2.983	-7.40	-10.281
		6685	147	-2.032	-2.548	-2.438	-7.40	-9.432
		6845	179	-2.690	-2.826	-2.725	-7.40	-10.090
	UNII8	6885	187	-2.411	-2.683	-2.324	-7.90	-10.224
		7005	211	-2.987	-3.242	-3.011	-7.90	-10.887
		7085	227	-2.981	-3.238	-2.767	-7.90	-10.667

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE40] 52T	UNII5	5965	3	-2.765	-3.252	-2.643	-7.20	-9.843
		6165	43	-3.273	-3.619	-3.335	-7.20	-10.473
		6405	91	-2.454	-2.943	-2.791	-7.20	-9.654
	UNII6	6445	99	-2.275	-2.918	-2.948	-6.30	-8.575
		6485	107	-2.526	-2.429	-2.378	-6.30	-8.678
		6525	115	-2.336	-2.885	-2.795	-6.30	-8.636
	UNII7	6565	123	-2.716	-2.946	-2.898	-7.40	-10.116
		6685	147	-2.675	-2.670	-2.957	-7.40	-10.070
		6845	179	-2.838	-3.105	-2.985	-7.40	-10.238
	UNII8	6885	187	-2.612	-2.942	-2.582	-7.90	-10.482
		7005	211	-2.738	-2.929	-2.846	-7.90	-10.638
		7085	227	-3.232	-3.474	-3.364	-7.90	-11.132

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE40] 106T	UNII5	5965	3	-2.770	-2.760	-2.600	-7.20	-9.800
		6165	43	-3.114	-3.226	-3.027	-7.20	-10.227
		6405	91	-2.588	-2.723	-2.707	-7.20	-9.788
	UNII6	6445	99	-2.198	-2.405	-2.672	-6.30	-8.498
		6485	107	-2.359	-2.648	-2.459	-6.30	-8.659
		6525	115	-2.316	-2.688	-2.886	-6.30	-8.616
	UNII7	6565	123	-2.866	-3.055	-2.886	-7.40	-10.266
		6685	147	-3.050	-3.359	-3.226	-7.40	-10.450
		6845	179	-2.542	-2.788	-2.606	-7.40	-9.942
	UNII8	6885	187	-2.435	-2.698	-2.585	-7.90	-10.335
		7005	211	-2.578	-2.809	-2.670	-7.90	-10.478
		7085	227	-3.008	-3.219	-3.077	-7.90	-10.908

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE40] 242T	UNII5	5965	3	-3.870	-	-3.860	-7.20	-11.060
		6165	43	-4.134	-	-3.897	-7.20	-11.097
		6405	91	-3.339	-	-3.361	-7.20	-10.539
	UNII6	6445	99	-3.589	-	-4.026	-6.30	-9.889
		6485	107	-3.454	-	-3.536	-6.30	-9.754
		6525	115	-3.292	-	-3.772	-6.30	-9.592
	UNII7	6565	123	-3.858	-	-3.874	-7.40	-11.258
		6685	147	-3.912	-	-3.782	-7.40	-11.182
		6845	179	-3.857	-	-3.994	-7.40	-11.257
	UNII8	6885	187	-3.808	-	-3.898	-7.90	-11.708
		7005	211	-3.845	-	-3.886	-7.90	-11.745
		7085	227	-4.199	-	-4.317	-7.90	-12.099

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE40] 484T	UNII5	5965	3	-	-6.697	-	-7.20	-13.897
		6165	43	-	-6.935	-	-7.20	-14.135
		6405	91	-	-6.128	-	-7.20	-13.328
	UNII6	6445	99	-	-6.469	-	-6.30	-12.769
		6485	107	-	-6.362	-	-6.30	-12.662
		6525	115	-	-6.397	-	-6.30	-12.697
	UNII7	6565	123	-	-6.696	-	-7.40	-14.096
		6685	147	-	-6.747	-	-7.40	-14.147
		6845	179	-	-6.708	-	-7.40	-14.108
	UNII8	6885	187	-	-6.698	-	-7.90	-14.598
		7005	211	-	-6.813	-	-7.90	-14.713
		7085	227	-	-7.150	-	-7.90	-15.050

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE40] SU	UNII5	5965	3	-	-6.445	-	-7.20	-13.645
		6165	43	-	-5.908	-	-7.20	-13.108
		6405	91	-	-5.178	-	-7.20	-12.378
	UNII6	6445	99	-	-6.071	-	-6.30	-12.371
		6485	107	-	-5.925	-	-6.30	-12.225
		6525	115	-	-6.007	-	-6.30	-12.307
	UNII7	6565	123	-	-6.165	-	-7.40	-13.565
		6685	147	-	-6.299	-	-7.40	-13.699
		6845	179	-	-6.417	-	-7.40	-13.817
	UNII8	6885	187	-	-6.274	-	-7.90	-14.174
		7005	211	-	-6.275	-	-7.90	-14.175
		7085	227	-	-6.735	-	-7.90	-14.635

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80] 26T	UNII5	5985	7	-3.398	-4.526	-3.394	-7.20	-10.594
		6145	39	-3.561	-5.228	-3.494	-7.20	-10.694
		6385	87	-2.409	-3.623	-2.695	-7.20	-9.609
	UNII6	6465	103	-3.416	-4.933	-3.517	-6.30	-9.716
		6545	119	-2.869	-4.578	-3.610	-6.30	-9.169
	UNII7	6625	135	-2.433	-4.308	-3.400	-7.40	-9.833
		6705	151	-2.347	-3.928	-2.915	-7.40	-9.747
		6785	167	-3.140	-4.199	-3.105	-7.40	-10.505
	UNII8	6865	183	-2.344	-3.991	-2.586	-7.90	-10.244
		6945	199	-2.798	-4.178	-2.659	-7.90	-10.559
		7025	215	-2.959	-4.081	-2.933	-7.90	-10.833

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80] 52T	UNII5	5985	7	-2.731	-2.875	-2.384	-7.20	-9.584
		6145	39	-3.123	-3.644	-3.315	-7.20	-10.323
		6385	87	-2.077	-2.218	-1.960	-7.20	-9.160
	UNII6	6465	103	-2.339	-3.107	-2.769	-6.30	-8.639
		6545	119	-3.085	-3.922	-4.029	-6.30	-9.385
	UNII7	6625	135	-2.973	-3.759	-3.676	-7.40	-10.373
		6705	151	-2.773	-3.195	-3.190	-7.40	-10.173
		6785	167	-2.789	-3.077	-2.579	-7.40	-9.979
	UNII8	6865	183	-2.739	-3.160	-2.981	-7.90	-10.639
		6945	199	-2.450	-2.947	-2.682	-7.90	-10.350
		7025	215	-2.228	-2.728	-2.618	-7.90	-10.128

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80] 106T	UNII5	5985	7	-2.503	-2.816	-2.467	-7.20	-9.667
		6145	39	-2.970	-3.328	-3.124	-7.20	-10.170
		6385	87	-3.060	-3.200	-2.997	-7.20	-10.197
	UNII6	6465	103	-2.238	-2.931	-2.632	-6.30	-8.538
		6545	119	-3.304	-4.091	-4.022	-6.30	-9.604
	UNII7	6625	135	-2.901	-3.663	-3.394	-7.40	-10.301
		6705	151	-3.313	-3.819	-3.870	-7.40	-10.713
		6785	167	-2.691	-2.621	-2.509	-7.40	-9.909
	UNII8	6865	183	-2.586	-2.987	-2.704	-7.90	-10.486
		6945	199	-2.637	-2.937	-2.607	-7.90	-10.507
		7025	215	-2.186	-2.652	-2.555	-7.90	-10.086

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 242T	UNII5	5985	7	-3.944	-3.945	-3.581	-7.20	-10.781
		6145	39	-3.715	-4.135	-3.989	-7.20	-10.915
		6385	87	-3.457	-3.536	-3.475	-7.20	-10.657
	UNII6	6465	103	-3.544	-4.011	-3.811	-6.30	-9.844
		6545	119	-3.810	-4.209	-4.473	-6.30	-10.110
	UNII7	6625	135	-3.092	-3.455	-3.791	-7.40	-10.492
		6705	151	-3.968	-4.017	-4.234	-7.40	-11.368
		6785	167	-3.938	-3.889	-4.007	-7.40	-11.289
	UNII8	6865	183	-4.046	-4.311	-4.143	-7.90	-11.946
		6945	199	-3.618	-3.889	-3.826	-7.90	-11.518
		7025	215	-3.445	-3.556	-3.730	-7.90	-11.345

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 484T	UNII5	5985	7	-6.934	-	-6.621	-7.20	-13.821
		6145	39	-6.698	-	-7.067	-7.20	-13.898
		6385	87	-6.510	-	-6.452	-7.20	-13.652
	UNII6	6465	103	-6.723	-	-6.742	-6.30	-13.023
		6545	119	-6.760	-	-7.507	-6.30	-13.060
	UNII7	6625	135	-5.915	-	-6.780	-7.40	-13.315
		6705	151	-6.959	-	-7.147	-7.40	-14.359
		6785	167	-6.832	-	-6.943	-7.40	-14.232
	UNII8	6865	183	-6.832	-	-6.970	-7.90	-14.732
		6945	199	-6.605	-	-6.828	-7.90	-14.505
		7025	215	-6.602	-	-6.645	-7.90	-14.502

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80] 996T	UNII5	5985	7	-	-9.614	-	-7.20	-16.814
		6145	39	-	-9.994	-	-7.20	-17.194
		6385	87	-	-9.496	-	-7.20	-16.696
	UNII6	6465	103	-	-9.817	-	-6.30	-16.117
		6545	119	-	-9.920	-	-6.30	-16.220
	UNII7	6625	135		-9.118		-7.40	-16.518
		6705	151	-	-9.834	-	-7.40	-17.234
		6785	167		-9.982		-7.40	-17.382
	UNII8	6865	183	-	-9.935	-	-7.90	-17.835
		6945	199	-	-9.573	-	-7.90	-17.473
		7025	215	-	-9.516	-	-7.90	-17.416

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80] SU	UNII5	5985	7	-	-9.107	-	-7.20	-16.307
		6145	39	-	-8.962	-	-7.20	-16.162
		6385	87	-	-8.461	-	-7.20	-15.661
	UNII6	6465	103	-	-9.269	-	-6.30	-15.569
		6545	119	-	-9.256	-	-6.30	-15.556
	UNII7	6625	135		-8.810		-7.40	-16.210
		6705	151	-	-9.524	-	-7.40	-16.924
		6785	167		-9.522		-7.40	-16.922
	UNII8	6865	183	-	-9.648	-	-7.90	-17.548
		6945	199	-	-9.233	-	-7.90	-17.133
		7025	215	-	-8.992	-	-7.90	-16.892

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80L] 26T	UNII5	6025	15	-4.190	-5.111	-4.078	-7.20	-11.278
		6185	47	-4.486	-5.610	-4.556	-7.20	-11.686
		6345	79	-2.840	-3.927	-3.171	-7.20	-10.040
	UNII6	6505	111	-1.852	-3.861	-3.251	-6.30	-8.152
	UNII7	6665	143	-2.805	-4.534	-3.696	-7.40	-10.205
	UNII8	6825	175	-2.301	-3.613	-2.684	-7.90	-10.201
		6985	207	-3.685	-5.246	-4.619	-7.90	-11.585

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80L] 52T	UNII5	6025	15	-3.029	-3.034	-2.934	-7.20	-10.134
		6185	47	-2.918	-3.152	-3.156	-7.20	-10.118
		6345	79	-2.798	-2.731	-3.070	-7.20	-9.931
	UNII6	6505	111	-3.608	-4.053	-3.773	-6.30	-9.908
	UNII7	6665	143	-3.628	-4.023	-4.380	-7.40	-11.028
	UNII8	6825	175	-3.745	-3.593	-4.158	-7.90	-11.493
		6985	207	-4.133	-4.318	-4.610	-7.90	-12.033

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80L] 106T	UNII5	6025	15	-3.344	-2.744	-3.023	-7.20	-9.944
		6185	47	-2.699	-3.098	-2.972	-7.20	-9.899
		6345	79	-2.456	-2.531	-3.098	-7.20	-9.656
	UNII6	6505	111	-3.133	-3.524	-3.797	-6.30	-9.433
	UNII7	6665	143	-3.523	-4.172	-4.326	-7.40	-10.923
	UNII8	6825	175	-3.412	-3.495	-3.870	-7.90	-11.312
		6985	207	-3.757	-4.436	-4.711	-7.90	-11.657

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80L] 242T	UNII5	6025	15	-4.099	-3.958	-3.614	-7.20	-10.814
		6185	47	-3.882	-3.679	-4.365	-7.20	-10.879
		6345	79	-3.096	-3.167	-3.755	-7.20	-10.296
	UNII6	6505	111	-3.950	-4.153	-4.478	-6.30	-10.250
	UNII7	6665	143	-4.009	-4.235	-4.868	-7.40	-11.409
	UNII8	6825	175	-4.050	-4.125	-4.546	-7.90	-11.950
		6985	207	-4.454	-4.587	-5.303	-7.90	-12.354

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80L] 484T	UNII5	6025	15	-6.871	-	-6.754	-7.20	-13.954
		6185	47	-6.735	-	-7.259	-7.20	-13.935
		6345	79	-6.150	-	-6.390	-7.20	-13.350
	UNII6	6505	111	-6.917	-	-7.220	-6.30	-13.217
	UNII7	6665	143	-7.099	-	-7.814	-7.40	-14.499
	UNII8	6825	175	-7.081	-	-7.393	-7.90	-14.981
		6985	207	-7.398	-	-8.209	-7.90	-15.298

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80L] 996T	UNII5	6025	15	-	-9.963	-	-7.20	-17.163
		6185	47	-	-10.096	-	-7.20	-17.296
		6345	79	-	-9.240	-	-7.20	-16.440
	UNII6	6505	111	-	-9.408	-	-6.30	-15.708
	UNII7	6665	143	-	-9.806	-	-7.40	-17.206
	UNII8	6825	175	-	-9.946	-	-7.90	-17.846
		6985	207	-	-10.153	-	-7.90	-18.053

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80U] 26T	UNII5	6025	15	-3.992	-4.784	-2.745	-7.20	-9.945
		6185	47	-4.451	-5.151	-4.271	-7.20	-11.471
		6345	79	-3.387	-4.371	-3.233	-7.20	-10.433
	UNII6	6505	111	-2.916	-4.400	-3.228	-6.30	-9.216
	UNII7	6665	143	-3.951	-4.732	-4.265	-7.40	-11.351
	UNII8	6825	175	-2.977	-4.134	-3.044	-7.90	-10.877
		6985	207	-4.543	-5.419	-4.208	-7.90	-12.108

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80U] 52T	UNII5	6025	15	-2.904	-2.986	-2.255	-7.20	-9.455
		6185	47	-3.196	-2.899	-3.180	-7.20	-10.099
		6345	79	-3.164	-3.335	-3.674	-7.20	-10.364
	UNII6	6505	111	-4.019	-4.196	-4.277	-6.30	-10.319
	UNII7	6665	143	-4.230	-4.699	-4.600	-7.40	-11.630
	UNII8	6825	175	-4.373	-4.179	-4.414	-7.90	-12.079
		6985	207	-4.789	-4.665	-4.811	-7.90	-12.565

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80U] 106T	UNII5	6025	15	-3.317	-2.879	-2.465	-7.20	-9.665
		6185	47	-3.174	-2.591	-2.935	-7.20	-9.791
		6345	79	-3.319	-3.156	-3.440	-7.20	-10.356
	UNII6	6505	111	-4.105	-4.225	-4.069	-6.30	-10.369
	UNII7	6665	143	-4.245	-4.481	-4.594	-7.40	-11.645
	UNII8	6825	175	-3.752	-4.014	-3.929	-7.90	-11.652
		6985	207	-4.443	-4.350	-4.363	-7.90	-12.250

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80U] 242T	UNII5	6025	15	-4.024	-3.780	-3.176	-7.20	-10.376
		6185	47	-4.057	-3.937	-4.098	-7.20	-11.137
		6345	79	-4.021	-4.061	-3.871	-7.20	-11.071
	UNII6	6505	111	-4.647	-4.857	-4.817	-6.30	-10.947
	UNII7	6665	143	-4.982	-4.923	-5.326	-7.40	-12.323
	UNII8	6825	175	-4.633	-4.972	-4.870	-7.90	-12.533
		6985	207	-5.103	-5.290	-5.132	-7.90	-13.003

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80U] 484T	UNII5	6025	15	-6.821	-	-6.390	-7.20	-13.590
		6185	47	-6.804	-	-6.906	-7.20	-14.004
		6345	79	-7.084	-	-6.618	-7.20	-13.818
	UNII6	6505	111	-7.496	-	-7.911	-6.30	-13.796
	UNII7	6665	143	-7.986	-	-8.195	-7.40	-15.386
	UNII8	6825	175	-7.817	-	-7.734	-7.90	-15.634
		6985	207	-8.245	-	-8.300	-7.90	-16.145

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE80U] 996T	UNII5	6025	15	-	-9.407	-	-7.20	-16.607
		6185	47	-	-10.083	-	-7.20	-17.283
		6345	79	-	-10.135	-	-7.20	-17.335
	UNII6	6505	111	-	-10.140	-	-6.30	-16.440
	UNII7	6665	143	-	-10.676	-	-7.40	-18.076
	UNII8	6825	175	-	-10.547	-	-7.90	-18.447
		6985	207	-	-10.759	-	-7.90	-18.659

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE160] 996*2T	UNII5	6025	15	-	-12.086	-	-7.20	-19.286
		6185	47	-	-12.448	-	-7.20	-19.648
		6345	79	-	-11.304	-	-7.20	-18.504
	UNII6	6505	111	-	-12.137	-	-6.30	-18.437
	UNII7	6665	143	-	-12.731	-	-7.40	-20.131
	UNII8	6825	175	-	-12.732	-	-7.90	-20.632
		6985	207	-	-13.112	-	-7.90	-21.012

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
[HE160] SU	UNII5	6025	15	-	-11.964	-	-7.20	-19.164
		6185	47	-	-12.135	-	-7.20	-19.335
		6345	79	-	-11.056	-	-7.20	-18.256
	UNII6	6505	111	-	-12.045	-	-6.30	-18.345
	UNII7	6665	143	-	-12.413	-	-7.40	-19.813
	UNII8	6825	175	-	-12.222	-	-7.90	-20.122
		6985	207	-	-12.761	-	-7.90	-20.661

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	[dBm/MHz]
802.11a	UNII5	5935	2	-	-3.139	-	-7.20	-10.339
		6175	45	-	-2.488	-	-7.20	-9.688
		6415	93	-	-1.952	-	-7.20	-9.152
	UNII6	6435	97	-	-2.634	-	-6.30	-8.934
		6475	105	-	-2.932	-	-6.30	-9.232
		6515	113	-	-2.459	-	-6.30	-8.759
	UNII7	6535	117	-	-2.979	-	-7.40	-10.379
		6695	149	-	-3.176	-	-7.40	-10.576
		6855	181	-	-3.209	-	-7.40	-10.609
	UNII8	6875	185	-	-3.011	-	-7.90	-10.911
		6995	209	-	-3.362	-	-7.90	-11.262
		7115	233	-	-3.086	-	-7.90	-10.986

**10.4.3 SUM (MIMO)**

· EIRP MIMO PSD (dBm /MHz) = SUM (Ant1 + Ant2) + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20] 26T	UNII5	5935	2	-5.71	-6.50	-3.07	-7.04	-8.00	-4.48	-5.77	-6.72	-3.21	-3.46	-6.54
		6175	45	-2.77	-4.06	-0.36	-4.04	-5.62	-1.74	-2.70	-4.03	-0.30	-3.46	-3.76
		6415	93	-4.02	-4.39	-1.19	-5.21	-5.57	-2.37	-3.98	-4.22	-1.08	-3.46	-4.54
	UNII6	6435	97	-2.35	-2.74	0.47	-4.16	-4.47	-1.30	-2.62	-3.09	0.16	-3.54	-3.07
		6475	105	-2.96	-2.67	0.20	-4.46	-3.88	-1.15	-3.05	-2.46	0.26	-3.54	-3.27
		6515	113	-2.94	-2.51	0.29	-4.66	-4.30	-1.46	-3.23	-2.92	-0.06	-3.54	-3.24
	UNII7	6535	117	-3.66	-2.52	-0.04	-5.37	-4.14	-1.70	-3.95	-2.59	-0.21	-4.39	-4.43
		6695	149	-2.24	-1.78	1.01	-3.62	-3.39	-0.49	-2.33	-1.93	0.88	-4.39	-3.38
		6855	181	-2.55	-1.80	0.86	-4.06	-3.55	-0.79	-2.89	-2.11	0.53	-4.39	-3.53
	UNII8	6875	185	-2.88	-2.16	0.50	-4.58	-3.62	-1.06	-3.21	-2.13	0.38	-5.18	-4.68
		6995	209	-2.68	-2.89	0.23	-4.59	-4.43	-1.49	-3.10	-2.70	0.11	-5.18	-4.96
		7115	233	-3.10	-2.44	0.25	-4.52	-3.61	-1.03	-3.19	-2.29	0.30	-5.18	-4.89

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20] 52T	UNII5	5935	2	-5.64	-6.32	-2.96	-5.78	-6.53	-3.13	-5.96	-6.49	-3.20	-3.46	-6.42
		6175	45	-2.80	-3.66	-0.20	-3.03	-3.77	-0.37	-2.72	-3.30	0.01	-3.46	-3.45
		6415	93	-2.07	-1.56	1.21	-2.26	-1.84	0.97	-2.25	-1.82	0.99	-3.46	-2.25
	UNII6	6435	97	-2.22	-2.34	0.73	-2.50	-2.75	0.39	-2.37	-2.60	0.52	-3.54	-2.81
		6475	105	-2.36	-2.80	0.43	-2.59	-3.01	0.21	-2.23	-2.65	0.58	-3.54	-2.96
		6515	113	-1.87	-2.19	0.98	-2.10	-2.76	0.59	-2.20	-2.69	0.57	-3.54	-2.56
	UNII7	6535	117	-2.03	-2.75	0.64	-2.35	-3.01	0.34	-1.94	-2.93	0.61	-4.39	-3.75
		6695	149	-2.10	-2.66	0.64	-2.12	-2.92	0.51	-2.04	-2.67	0.67	-4.39	-3.72
		6855	181	-2.27	-3.09	0.35	-2.57	-3.12	0.18	-2.58	-2.92	0.26	-4.39	-4.04
	UNII8	6875	185	-2.45	-2.65	0.46	-2.65	-3.21	0.09	-2.72	-2.96	0.17	-5.18	-4.72
		6995	209	-2.21	-2.89	0.47	-2.39	-3.04	0.31	-2.51	-2.95	0.29	-5.18	-4.71
		7115	233	-3.09	-2.75	0.09	-3.40	-2.90	-0.13	-3.05	-2.68	0.15	-5.18	-5.04

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20] 106T	UNII5	5935	2	-5.32	-6.99	-3.06	-	-	-	-5.62	-7.08	-3.28	-3.46	-6.52
		6175	45	-2.73	-3.16	0.07	-	-	-	-2.68	-3.05	0.15	-3.46	-3.31
		6415	93	-1.91	-1.63	1.24	-	-	-	-1.87	-1.50	1.33	-3.46	-2.13
	UNII6	6435	97	-1.81	-2.36	0.93	-	-	-	-2.29	-2.51	0.61	-3.54	-2.61
		6475	105	-2.40	-2.69	0.47	-	-	-	-2.32	-2.64	0.53	-3.54	-3.00
		6515	113	-1.92	-2.44	0.84	-	-	-	-2.17	-2.71	0.58	-3.54	-2.70
	UNII7	6535	117	-2.25	-2.85	0.47	-	-	-	-2.34	-2.93	0.39	-4.39	-3.92
		6695	149	-1.92	-3.05	0.56	-	-	-	-2.15	-3.07	0.43	-4.39	-3.83
		6855	181	-2.24	-2.69	0.55	-	-	-	-2.33	-2.57	0.56	-4.39	-3.83
	UNII8	6875	185	-2.32	-2.80	0.46	-	-	-	-2.45	-2.52	0.53	-5.18	-4.66
		6995	209	-2.08	-2.82	0.57	-	-	-	-2.30	-2.96	0.39	-5.18	-4.61
		7115	233	-2.98	-3.24	-0.10	-	-	-	-3.23	-3.09	-0.15	-5.18	-5.28

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20] 242T	UNII5	5935	2	-	-	-	-5.78	-7.46	-3.53	-	-	-	-3.46	-6.99
		6175	45	-	-	-	-2.73	-3.75	-0.20	-	-	-	-3.46	-3.66
		6415	93	-	-	-	-2.35	-2.11	0.78	-	-	-	-3.46	-2.68
	UNII6	6435	97	-	-	-	-2.55	-2.95	0.27	-	-	-	-3.54	-3.27
		6475	105	-	-	-	-2.74	-3.15	0.07	-	-	-	-3.54	-3.46
		6515	113	-	-	-	-2.52	-2.81	0.35	-	-	-	-3.54	-3.19
	UNII7	6535	117	-	-	-	-2.53	-3.12	0.19	-	-	-	-4.39	-4.20
		6695	149	-	-	-	-2.52	-3.20	0.17	-	-	-	-4.39	-4.22
		6855	181	-	-	-	-2.32	-3.43	0.17	-	-	-	-4.39	-4.22
	UNII8	6875	185	-	-	-	-2.55	-3.37	0.07	-	-	-	-5.18	-5.12
		6995	209	-	-	-	-2.71	-3.37	-0.01	-	-	-	-5.18	-5.20
		7115	233	-	-	-	-3.79	-3.36	-0.56	-	-	-	-5.18	-5.74

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-	-	-	-1.84	-3.45	0.44	-	-	-	-3.46	-3.03
		6175	45	-	-	-	-2.15	-2.92	0.49	-	-	-	-3.46	-2.97
		6415	93	-	-	-	-2.43	-2.07	0.76	-	-	-	-3.46	-2.70
	UNII6	6435	97	-	-	-	-2.51	-3.01	0.26	-	-	-	-3.54	-3.27
		6475	105	-	-	-	-2.91	-3.32	-0.10	-	-	-	-3.54	-3.64
		6515	113	-	-	-	-2.67	-3.17	0.10	-	-	-	-3.54	-3.43
	SU	6535	117	-	-	-	-2.80	-3.14	0.04	-	-	-	-4.39	-4.35
		6695	149	-	-	-	-2.58	-3.39	0.04	-	-	-	-4.39	-4.35
		6855	181	-	-	-	-2.58	-3.29	0.09	-	-	-	-4.39	-4.30
	UNII8	6875	185	-	-	-	-2.73	-3.38	-0.03	-	-	-	-5.18	-5.21
		6995	209	-	-	-	-2.80	-3.45	-0.10	-	-	-	-5.18	-5.29
		7115	233	-	-	-	-3.80	-3.39	-0.58	-	-	-	-5.18	-5.76

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-2.73	-3.62	-0.14	-3.31	-4.28	-0.76	-3.04	-3.53	-0.27	-3.46	-3.60
		6165	43	-2.06	-3.69	0.21	-2.90	-3.81	-0.32	-2.43	-3.21	0.21	-3.46	-3.25
		6405	91	-2.30	-2.20	0.76	-2.71	-2.22	0.55	-2.38	-2.56	0.54	-3.46	-2.70
	UNII6	6445	99	-2.31	-2.93	0.40	-2.94	-3.50	-0.20	-2.54	-3.48	0.03	-3.54	-3.13
		6485	107	-2.58	-3.77	-0.13	-2.92	-3.53	-0.21	-2.96	-3.59	-0.25	-3.54	-3.66
		6525	115	-2.83	-2.68	0.26	-3.38	-3.03	-0.19	-3.11	-3.26	-0.17	-3.54	-3.28
	26T	6565	123	-3.90	-2.88	-0.35	-4.17	-3.18	-0.63	-4.29	-2.98	-0.58	-4.39	-4.74
		6685	147	-2.54	-2.03	0.73	-2.71	-2.55	0.38	-2.71	-2.44	0.44	-4.39	-3.66
		6845	179	-2.65	-2.69	0.34	-3.14	-2.83	0.03	-3.16	-2.73	0.07	-4.39	-4.05
	UNII8	6885	187	-2.66	-2.41	0.48	-3.39	-2.68	-0.01	-3.30	-2.32	0.23	-5.18	-4.71
		7005	211	-2.69	-2.99	0.17	-3.09	-3.24	-0.15	-3.33	-3.01	-0.15	-5.18	-5.01
		7085	227	-2.97	-2.98	0.03	-3.94	-3.24	-0.57	-4.00	-2.77	-0.33	-5.18	-5.15

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40] 52T	UNII5	5965	3	-2.44	-2.77	0.41	-2.71	-3.25	0.04	-2.48	-2.64	0.45	-3.46	-3.01
		6165	43	-2.52	-3.27	0.13	-2.89	-3.62	-0.23	-2.52	-3.34	0.10	-3.46	-3.33
		6405	91	-2.94	-2.45	0.32	-3.22	-2.94	-0.07	-3.20	-2.79	0.02	-3.46	-3.14
	UNII6	6445	99	-2.09	-2.28	0.83	-2.47	-2.92	0.32	-2.33	-2.95	0.38	-3.54	-2.71
		6485	107	-1.97	-2.53	0.77	-1.89	-2.43	0.86	-1.89	-2.38	0.89	-3.54	-2.65
		6525	115	-1.90	-2.34	0.90	-2.14	-2.89	0.52	-1.92	-2.80	0.68	-3.54	-2.64
	UNII7	6565	123	-1.64	-2.72	0.86	-1.99	-2.95	0.57	-1.84	-2.90	0.68	-4.39	-3.53
		6685	147	-1.83	-2.68	0.78	-2.30	-2.67	0.53	-2.20	-2.96	0.45	-4.39	-3.61
		6845	179	-2.07	-2.84	0.57	-2.62	-3.11	0.16	-2.46	-2.99	0.30	-4.39	-3.82
	UNII8	6885	187	-2.45	-2.61	0.48	-3.01	-2.94	0.04	-2.94	-2.58	0.25	-5.18	-4.70
		7005	211	-1.93	-2.74	0.70	-2.50	-2.93	0.30	-2.58	-2.85	0.30	-5.18	-4.49
		7085	227	-2.90	-3.23	-0.05	-3.32	-3.47	-0.39	-3.29	-3.36	-0.32	-5.18	-5.24

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40] 106T	UNII5	5965	3	-2.90	-2.77	0.18	-3.19	-2.76	0.04	-2.87	-2.60	0.28	-3.46	-3.18
		6165	43	-2.69	-3.11	0.12	-2.70	-3.23	0.06	-2.70	-3.03	0.15	-3.46	-3.31
		6405	91	-2.95	-2.59	0.24	-3.26	-2.72	0.03	-3.03	-2.71	0.14	-3.46	-3.22
	UNII6	6445	99	-2.13	-2.20	0.84	-2.38	-2.41	0.62	-2.37	-2.67	0.49	-3.54	-2.69
		6485	107	-1.82	-2.36	0.93	-1.92	-2.65	0.74	-2.03	-2.46	0.77	-3.54	-2.61
		6525	115	-2.00	-2.32	0.86	-2.18	-2.69	0.58	-2.33	-2.89	0.41	-3.54	-2.68
	UNII7	6565	123	-1.86	-2.87	0.68	-2.15	-3.06	0.43	-2.09	-2.89	0.54	-4.39	-3.71
		6685	147	-1.90	-3.05	0.57	-2.22	-3.36	0.26	-2.27	-3.23	0.29	-4.39	-3.82
		6845	179	-1.88	-2.54	0.81	-2.36	-2.79	0.44	-2.29	-2.61	0.56	-4.39	-3.58
	UNII8	6885	187	-2.43	-2.44	0.58	-2.64	-2.70	0.34	-2.80	-2.59	0.32	-5.18	-4.60
		7005	211	-2.06	-2.58	0.70	-2.49	-2.81	0.37	-2.40	-2.67	0.48	-5.18	-4.48
		7085	227	-2.69	-3.01	0.16	-2.90	-3.22	-0.05	-2.99	-3.08	-0.02	-5.18	-5.02

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40] 242T	UNII5	5965	3	-3.85	-3.87	-0.85	-	-	-	-3.80	-3.86	-0.82	-3.46	-4.28
		6165	43	-2.82	-4.13	-0.42	-	-	-	-2.92	-3.90	-0.37	-3.46	-3.83
		6405	91	-3.61	-3.34	-0.46	-	-	-	-3.69	-3.36	-0.51	-3.46	-3.92
	UNII6	6445	99	-3.13	-3.59	-0.34	-	-	-	-3.42	-4.03	-0.70	-3.54	-3.88
		6485	107	-2.98	-3.45	-0.20	-	-	-	-3.26	-3.54	-0.39	-3.54	-3.74
		6525	115	-3.14	-3.29	-0.21	-	-	-	-3.26	-3.77	-0.50	-3.54	-3.74
	UNII7	6565	123	-2.79	-3.86	-0.28	-	-	-	-2.92	-3.87	-0.36	-4.39	-4.67
		6685	147	-3.17	-3.91	-0.52	-	-	-	-3.40	-3.78	-0.57	-4.39	-4.91
		6845	179	-2.71	-3.86	-0.24	-	-	-	-3.20	-3.99	-0.57	-4.39	-4.63
	UNII8	6885	187	-3.17	-3.81	-0.47	-	-	-	-3.46	-3.90	-0.66	-5.18	-5.65
		7005	211	-3.19	-3.85	-0.49	-	-	-	-3.48	-3.89	-0.67	-5.18	-5.68
		7085	227	-4.15	-4.20	-1.17	-	-	-	-4.55	-4.32	-1.42	-5.18	-6.35

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40] 484T	UNII5	5965	3	-	-	-	-6.79	-6.70	-3.73	-	-	-	-3.46	-7.19
		6165	43	-	-	-	-5.91	-6.94	-3.38	-	-	-	-3.46	-6.84
		6405	91	-	-	-	-6.46	-6.13	-3.28	-	-	-	-3.46	-6.74
	UNII6	6445	99	-	-	-	-6.13	-6.47	-3.29	-	-	-	-3.54	-6.82
		6485	107	-	-	-	-5.98	-6.36	-3.15	-	-	-	-3.54	-6.69
		6525	115	-	-	-	-5.94	-6.40	-3.15	-	-	-	-3.54	-6.69
	UNII7	6565	123	-	-	-	-5.73	-6.70	-3.18	-	-	-	-4.39	-7.57
		6685	147	-	-	-	-5.95	-6.75	-3.32	-	-	-	-4.39	-7.71
		6845	179	-	-	-	-5.57	-6.71	-3.09	-	-	-	-4.39	-7.48
	UNII8	6885	187	-	-	-	-6.09	-6.70	-3.38	-	-	-	-5.18	-8.56
		7005	211	-	-	-	-6.14	-6.81	-3.45	-	-	-	-5.18	-8.64
		7085	227	-	-	-	-7.18	-7.15	-4.15	-	-	-	-5.18	-9.34

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-	-	-	-6.11	-6.45	-3.26	-	-	-	-3.46	-6.73
		6165	43	-	-	-	-5.16	-5.91	-2.51	-	-	-	-3.46	-5.97
		6405	91	-	-	-	-5.36	-5.18	-2.26	-	-	-	-3.46	-5.72
	UNII6	6445	99	-	-	-	-5.71	-6.07	-2.88	-	-	-	-3.54	-6.41
		6485	107	-	-	-	-5.33	-5.93	-2.60	-	-	-	-3.54	-6.14
		6525	115	-	-	-	-5.52	-6.01	-2.75	-	-	-	-3.54	-6.28
	SU	6565	123	-	-	-	-5.22	-6.17	-2.65	-	-	-	-4.39	-7.04
		6685	147	-	-	-	-5.47	-6.30	-2.85	-	-	-	-4.39	-7.24
		6845	179	-	-	-	-5.31	-6.42	-2.82	-	-	-	-4.39	-7.21
	UNII8	6885	187	-	-	-	-5.59	-6.27	-2.91	-	-	-	-5.18	-8.09
		7005	211	-	-	-	-5.78	-6.28	-3.01	-	-	-	-5.18	-8.20
		7085	227	-	-	-	-6.69	-6.74	-3.70	-	-	-	-5.18	-8.89

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	-2.77	-3.40	-0.06	-4.10	-4.53	-1.29	-2.05	-3.39	0.34	-3.46	-3.12
		6145	39	-2.41	-3.56	0.06	-3.73	-5.23	-1.40	-2.59	-3.49	-0.01	-3.46	-3.40
		6385	87	-2.71	-2.41	0.46	-4.25	-3.62	-0.92	-2.62	-2.70	0.35	-3.46	-3.01
	UNII6	6465	103	-2.60	-3.42	0.02	-4.38	-4.93	-1.64	-2.77	-3.52	-0.12	-3.54	-3.51
		6545	119	-3.11	-2.87	0.02	-4.66	-4.58	-1.61	-3.31	-3.61	-0.45	-3.54	-3.52
	26T	6625	135	-3.39	-2.43	0.13	-5.08	-4.31	-1.67	-3.99	-3.40	-0.68	-4.39	-4.26
		6705	151	-2.49	-2.35	0.59	-3.98	-3.93	-0.94	-2.87	-2.92	0.12	-4.39	-3.80
		6785	167	-2.84	-3.14	0.03	-4.36	-4.20	-1.27	-2.92	-3.11	0.00	-4.39	-4.36
	UNII8	6865	183	-2.66	-2.34	0.51	-4.48	-3.99	-1.22	-3.52	-2.59	-0.02	-5.18	-4.67
		6945	199	-2.27	-2.80	0.48	-4.11	-4.18	-1.13	-3.45	-2.66	-0.02	-5.18	-4.70
		7025	215	-2.60	-2.96	0.24	-4.41	-4.08	-1.23	-3.91	-2.93	-0.38	-5.18	-4.95

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 52T	UNII5	5985	7	-2.80	-2.73	0.25	-2.52	-2.88	0.32	-2.05	-2.38	0.80	-3.46	-2.67
		6145	39	-2.70	-3.12	0.10	-2.79	-3.64	-0.19	-2.47	-3.32	0.14	-3.46	-3.32
		6385	87	-2.13	-2.08	0.91	-2.39	-2.22	0.71	-2.16	-1.96	0.95	-3.46	-2.51
	UNII6	6465	103	-2.22	-2.34	0.73	-2.49	-3.11	0.22	-2.46	-2.77	0.40	-3.54	-2.81
		6545	119	-2.28	-3.09	0.34	-3.09	-3.92	-0.47	-2.85	-4.03	-0.39	-3.54	-3.19
	UNII7	6625	135	-2.89	-2.97	0.08	-3.49	-3.76	-0.61	-3.26	-3.68	-0.45	-4.39	-4.31
		6705	151	-1.91	-2.77	0.69	-2.54	-3.20	0.15	-2.45	-3.19	0.20	-4.39	-3.70
		6785	167	-1.98	-2.79	0.65	-2.20	-3.08	0.39	-2.42	-2.58	0.51	-4.39	-3.74
	UNII8	6865	183	-2.02	-2.74	0.65	-2.58	-3.16	0.15	-3.06	-2.98	-0.01	-5.18	-4.54
		6945	199	-1.84	-2.45	0.87	-2.50	-2.95	0.29	-2.74	-2.68	0.30	-5.18	-4.31
		7025	215	-2.14	-2.23	0.83	-2.81	-2.73	0.24	-2.92	-2.62	0.24	-5.18	-4.36

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 106T	UNII5	5985	7	-2.76	-2.50	0.38	-3.12	-2.82	0.05	-2.60	-2.47	0.48	-3.46	-2.98
		6145	39	-2.72	-2.97	0.17	-2.81	-3.33	-0.05	-2.49	-3.12	0.22	-3.46	-3.24
		6385	87	-3.19	-3.06	-0.11	-3.50	-3.20	-0.34	-3.35	-3.00	-0.16	-3.46	-3.57
	UNII6	6465	103	-2.30	-2.24	0.74	-2.70	-2.93	0.20	-2.63	-2.63	0.38	-3.54	-2.80
		6545	119	-2.65	-3.30	0.05	-3.29	-4.09	-0.66	-3.18	-4.02	-0.57	-3.54	-3.49
	UNII7	6625	135	-2.93	-2.90	0.10	-3.63	-3.66	-0.64	-3.74	-3.39	-0.55	-4.39	-4.29
		6705	151	-2.05	-3.31	0.37	-2.69	-3.82	-0.21	-2.65	-3.87	-0.20	-4.39	-4.02
		6785	167	-2.18	-2.69	0.58	-2.46	-2.62	0.47	-2.57	-2.51	0.47	-4.39	-3.81
	UNII8	6865	183	-1.84	-2.59	0.81	-2.89	-2.99	0.07	-2.91	-2.70	0.20	-5.18	-4.37
		6945	199	-2.03	-2.64	0.69	-2.65	-2.94	0.22	-2.73	-2.61	0.34	-5.18	-4.49
		7025	215	-2.11	-2.19	0.86	-2.77	-2.65	0.30	-3.11	-2.56	0.19	-5.18	-4.32

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 242T	UNII5	5985	7	-3.88	-3.94	-0.90	-4.00	-3.95	-0.96	-3.33	-3.58	-0.45	-3.46	-3.91
		6145	39	-2.92	-3.72	-0.29	-2.89	-4.14	-0.46	-2.69	-3.99	-0.28	-3.46	-3.74
		6385	87	-3.70	-3.46	-0.57	-3.89	-3.54	-0.70	-3.82	-3.48	-0.63	-3.46	-4.03
	UNII6	6465	103	-3.14	-3.54	-0.33	-3.52	-4.01	-0.75	-3.42	-3.81	-0.60	-3.54	-3.86
		6545	119	-2.98	-3.81	-0.36	-3.37	-4.21	-0.76	-3.53	-4.47	-0.96	-3.54	-3.90
	UNII7	6625	135	-2.86	-3.09	0.04	-3.07	-3.46	-0.25	-3.50	-3.79	-0.63	-4.39	-4.35
		6705	151	-3.22	-3.97	-0.57	-3.59	-4.02	-0.79	-3.89	-4.23	-1.05	-4.39	-4.96
		6785	167	-2.75	-3.94	-0.29	-3.00	-3.89	-0.41	-3.36	-4.01	-0.66	-4.39	-4.68
	UNII8	6865	183	-2.99	-4.05	-0.47	-3.40	-4.31	-0.82	-3.54	-4.14	-0.82	-5.18	-5.66
		6945	199	-2.99	-3.62	-0.28	-3.27	-3.89	-0.56	-3.72	-3.83	-0.76	-5.18	-5.47
		7025	215	-3.19	-3.45	-0.30	-3.56	-3.56	-0.55	-4.14	-3.73	-0.92	-5.18	-5.49

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 484T	UNII5	5985	7	-7.02	-6.93	-3.96	-	-	-	-6.47	-6.62	-3.53	-3.46	-6.99
		6145	39	-5.87	-6.70	-3.25	-	-	-	-5.89	-7.07	-3.43	-3.46	-6.71
		6385	87	-6.74	-6.51	-3.62	-	-	-	-6.91	-6.45	-3.66	-3.46	-7.08
	UNII6	6465	103	-6.35	-6.72	-3.52	-	-	-	-6.51	-6.74	-3.61	-3.54	-7.06
		6545	119	-6.03	-6.76	-3.37	-	-	-	-6.63	-7.51	-4.04	-3.54	-6.91
	UNII7	6625	135	-5.81	-5.92	-2.85				-6.24	-6.78	-3.49	-4.39	-7.24
		6705	151	-6.26	-6.96	-3.58	-	-	-	-6.86	-7.15	-3.99	-4.39	-7.97
		6785	167	-5.80	-6.83	-3.28				-6.28	-6.94	-3.59	-4.39	-7.66
	UNII8	6865	183	-5.84	-6.83	-3.30	-	-	-	-6.61	-6.97	-3.77	-5.18	-8.48
		6945	199	-5.64	-6.61	-3.08	-	-	-	-6.41	-6.83	-3.60	-5.18	-8.27
		7025	215	-6.17	-6.60	-3.37	-	-	-	-6.93	-6.65	-3.77	-5.18	-8.55

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] 996T	UNII5	5985	7	-	-	-	-9.56	-9.61	-6.58	-	-	-	-3.46	-10.04
		6145	39	-	-	-	-8.93	-9.99	-6.42	-	-	-	-3.46	-9.88
		6385	87	-	-	-	-9.90	-9.50	-6.68	-	-	-	-3.46	-10.15
	UNII6	6465	103	-	-	-	-9.47	-9.82	-6.63	-	-	-	-3.54	-10.17
		6545	119	-	-	-	-9.22	-9.92	-6.55	-	-	-	-3.54	-10.08
	UNII7	6625	135				-8.99	-9.12	-6.04				-4.39	-10.43
		6705	151	-	-	-	-9.19	-9.83	-6.49	-	-	-	-4.39	-10.88
		6785	167				-8.98	-9.98	-6.44				-4.39	-10.83
	UNII8	6865	183	-	-	-	-8.89	-9.94	-6.37	-	-	-	-5.18	-11.55
		6945	199	-	-	-	-8.90	-9.57	-6.21	-	-	-	-5.18	-11.40
		7025	215	-	-	-	-9.25	-9.52	-6.37	-	-	-	-5.18	-11.56

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80] SU	UNII5	5985	7	-	-	-	-9.14	-9.11	-6.11	-	-	-	-3.46	-9.58
		6145	39	-	-	-	-8.07	-8.96	-5.48	-	-	-	-3.46	-8.95
		6385	87	-	-	-	-8.64	-8.46	-5.54	-	-	-	-3.46	-9.00
	UNII6	6465	103	-	-	-	-8.92	-9.27	-6.08	-	-	-	-3.54	-9.62
		6545	119	-	-	-	-8.29	-9.26	-5.74	-	-	-	-3.54	-9.27
	UNII7	6625	135				-8.59	-8.81	-5.69				-4.39	-10.08
		6705	151	-	-	-	-9.03	-9.52	-6.26	-	-	-	-4.39	-10.65
		6785	167				-8.72	-9.52	-6.09				-4.39	-10.48
	UNII8	6865	183	-	-	-	-8.90	-9.65	-6.25	-	-	-	-5.18	-11.43
		6945	199	-	-	-	-8.75	-9.23	-5.97	-	-	-	-5.18	-11.16
		7025	215	-	-	-	-9.08	-8.99	-6.02	-	-	-	-5.18	-11.21

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 26T	UNII5	6025	15	-3.86	-4.19	-1.01	-5.12	-5.11	-2.11	-3.96	-4.08	-1.01	-3.46	-4.47
		6185	47	-2.64	-4.49	-0.45	-3.90	-5.61	-1.66	-2.58	-4.56	-0.45	-3.46	-3.91
		6345	79	-2.14	-2.84	0.53	-3.37	-3.93	-0.63	-2.72	-3.17	0.07	-3.46	-2.93
	UNII6	6505	111	-2.59	-1.85	0.80	-4.53	-3.86	-1.17	-3.23	-3.25	-0.23	-3.54	-2.73
	UNII7	6665	143	-3.54	-2.81	-0.15	-4.92	-4.53	-1.71	-3.95	-3.70	-0.81	-4.39	-4.54
	UNII8	6825	175	-2.75	-2.30	0.49	-3.67	-3.61	-0.63	-3.07	-2.68	0.14	-5.18	-4.69
		6985	207	-2.61	-3.69	-0.10	-4.48	-5.25	-1.84	-4.16	-4.62	-1.37	-5.18	-5.29
[HE80L] 52T	UNII5	6025	15	-3.29	-3.03	-0.15	-3.19	-3.03	-0.10	-2.96	-2.93	0.06	-3.46	-3.40
		6185	47	-2.43	-2.92	0.34	-2.42	-3.15	0.24	-2.31	-3.16	0.30	-3.46	-3.12
		6345	79	-3.07	-2.80	0.08	-3.09	-2.73	0.10	-3.26	-3.07	-0.16	-3.46	-3.36
	UNII6	6505	111	-2.78	-3.61	-0.16	-3.19	-4.05	-0.59	-3.56	-3.77	-0.65	-3.54	-3.70
	UNII7	6665	143	-2.32	-3.63	0.09	-3.06	-4.02	-0.51	-3.27	-4.38	-0.78	-4.39	-4.30
	UNII8	6825	175	-2.55	-3.75	-0.09	-2.89	-3.59	-0.22	-3.60	-4.16	-0.86	-5.18	-5.28
		6985	207	-2.21	-4.13	-0.06	-3.18	-4.32	-0.70	-3.97	-4.61	-1.27	-5.18	-5.24
[HE80L] 106T	UNII5	6025	15	-3.61	-3.34	-0.46	-3.38	-2.74	-0.04	-3.01	-3.02	-0.01	-3.46	-3.47
		6185	47	-2.41	-2.70	0.46	-2.57	-3.10	0.19	-2.61	-2.97	0.22	-3.46	-3.00
		6345	79	-3.17	-2.46	0.21	-3.04	-2.53	0.23	-3.39	-3.10	-0.23	-3.46	-3.23
	UNII6	6505	111	-2.98	-3.13	-0.04	-3.38	-3.52	-0.44	-3.51	-3.80	-0.64	-3.54	-3.58
	UNII7	6665	143	-2.62	-3.52	-0.04	-3.12	-4.17	-0.60	-3.47	-4.33	-0.87	-4.39	-4.43
	UNII8	6825	175	-2.70	-3.41	-0.03	-3.50	-3.50	-0.49	-3.68	-3.87	-0.76	-5.18	-5.22
		6985	207	-2.37	-3.76	0.00	-3.29	-4.44	-0.81	-3.74	-4.71	-1.19	-5.18	-5.18

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 242T	UNII5	6025	15	-4.35	-4.10	-1.21	-4.24	-3.96	-1.09	-3.80	-3.61	-0.70	-3.46	-4.16
		6185	47	-3.04	-3.88	-0.43	-3.26	-3.68	-0.45	-3.48	-4.37	-0.89	-3.46	-3.89
		6345	79	-3.51	-3.10	-0.29	-3.56	-3.17	-0.35	-3.84	-3.76	-0.79	-3.46	-3.75
	UNII6	6505	111	-3.38	-3.95	-0.64	-3.46	-4.15	-0.78	-4.14	-4.48	-1.30	-3.54	-4.18
	UNII7	6665	143	-2.90	-4.01	-0.41	-2.98	-4.24	-0.55	-3.77	-4.87	-1.27	-4.39	-4.80
	UNII8	6825	175	-2.95	-4.05	-0.46	-3.01	-4.13	-0.52	-3.89	-4.55	-1.20	-5.18	-5.64
		6985	207	-2.53	-4.45	-0.37	-2.83	-4.59	-0.61	-4.19	-5.30	-1.70	-5.18	-5.56
[HE80L] 484T	UNII5	6025	15	-7.30	-6.87	-4.07	-	-	-	-6.90	-6.75	-3.81	-3.46	-7.28
		6185	47	-6.15	-6.74	-3.42	-	-	-	-6.44	-7.26	-3.82	-3.46	-6.88
		6345	79	-6.58	-6.15	-3.35	-	-	-	-6.49	-6.39	-3.43	-3.46	-6.81
	UNII6	6505	111	-6.40	-6.92	-3.64	-	-	-	-6.77	-7.22	-3.98	-3.54	-7.18
	UNII7	6665	143	-6.06	-7.10	-3.54	-	-	-	-6.77	-7.81	-4.25	-4.39	-7.93
	UNII8	6825	175	-6.25	-7.08	-3.63	-	-	-	-6.47	-7.39	-3.90	-5.18	-8.82
		6985	207	-5.68	-7.40	-3.45	-	-	-	-6.88	-8.21	-4.49	-5.18	-8.63
[HE80L] 996T	UNII5	6025	15	-	-	-	-10.14	-9.96	-7.04	-	-	-	-3.46	-10.50
		6185	47	-	-	-	-9.40	-10.10	-6.72	-	-	-	-3.46	-10.19
		6345	79	-	-	-	-9.70	-9.24	-6.45	-	-	-	-3.46	-9.91
	UNII6	6505	111	-	-	-	-9.07	-9.41	-6.23	-	-	-	-3.54	-9.76
	UNII7	6665	143	-	-	-	-8.64	-9.81	-6.17	-	-	-	-4.39	-10.56
	UNII8	6825	175	-	-	-	-8.65	-9.95	-6.24	-	-	-	-5.18	-11.42
		6985	207	-	-	-	-8.72	-10.15	-6.37	-	-	-	-5.18	-11.55

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 26T	UNII5	6025	15	-3.40	-3.99	-0.68	-4.45	-4.78	-1.60	-2.81	-2.75	0.23	-3.46	-3.23
		6185	47	-2.77	-4.45	-0.52	-3.69	-5.15	-1.35	-2.44	-4.27	-0.25	-3.46	-3.71
		6345	79	-2.80	-3.39	-0.07	-4.10	-4.37	-1.22	-3.11	-3.23	-0.16	-3.46	-3.53
	UNII6	6505	111	-3.48	-2.92	-0.18	-4.47	-4.40	-1.42	-3.45	-3.23	-0.33	-3.54	-3.71
	UNII7	6665	143	-3.90	-3.95	-0.91	-5.24	-4.73	-1.97	-4.46	-4.27	-1.35	-4.39	-5.30
	UNII8	6825	175	-2.95	-2.98	0.05	-4.40	-4.13	-1.25	-3.80	-3.04	-0.40	-5.18	-5.14
		6985	207	-4.32	-4.54	-1.42	-5.83	-5.42	-2.61	-5.69	-4.21	-1.88	-5.18	-6.61
[HE80U] 52T	UNII5	6025	15	-2.72	-2.90	0.20	-2.45	-2.99	0.30	-2.13	-2.26	0.82	-3.46	-2.64
		6185	47	-2.29	-3.20	0.29	-2.08	-2.90	0.54	-2.23	-3.18	0.33	-3.46	-2.92
		6345	79	-3.72	-3.16	-0.42	-3.32	-3.34	-0.32	-4.12	-3.67	-0.88	-3.46	-3.78
	UNII6	6505	111	-3.67	-4.02	-0.83	-3.73	-4.20	-0.95	-3.76	-4.28	-1.00	-3.54	-4.37
	UNII7	6665	143	-3.35	-4.23	-0.76	-3.44	-4.70	-1.01	-3.80	-4.60	-1.17	-4.39	-5.15
	UNII8	6825	175	-3.55	-4.37	-0.93	-4.38	-4.18	-1.27	-4.42	-4.41	-1.41	-5.18	-6.12
		6985	207	-4.25	-4.79	-1.50	-4.29	-4.67	-1.46	-4.63	-4.81	-1.71	-5.18	-6.65
[HE80U] 106T	UNII5	6025	15	-3.05	-3.32	-0.17	-2.44	-2.88	0.36	-2.11	-2.47	0.73	-3.46	-2.73
		6185	47	-2.81	-3.17	0.02	-2.29	-2.59	0.57	-2.18	-2.94	0.47	-3.46	-2.89
		6345	79	-3.87	-3.32	-0.58	-4.00	-3.16	-0.55	-3.92	-3.44	-0.66	-3.46	-4.01
	UNII6	6505	111	-3.57	-4.11	-0.82	-3.73	-4.23	-0.96	-3.82	-4.07	-0.93	-3.54	-4.36
	UNII7	6665	143	-3.25	-4.25	-0.71	-3.72	-4.48	-1.07	-4.01	-4.59	-1.28	-4.39	-5.10
	UNII8	6825	175	-3.89	-3.75	-0.81	-4.35	-4.01	-1.17	-4.86	-3.93	-1.36	-5.18	-5.99
		6985	207	-4.02	-4.44	-1.21	-4.25	-4.35	-1.29	-4.68	-4.36	-1.51	-5.18	-6.40

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 242T	UNII5	6025	15	-3.87	-4.02	-0.93	-3.78	-3.78	-0.77	-3.12	-3.18	-0.14	-3.46	-3.60
		6185	47	-3.24	-4.06	-0.62	-2.98	-3.94	-0.42	-2.97	-4.10	-0.49	-3.46	-3.88
		6345	79	-4.22	-4.02	-1.11	-4.31	-4.06	-1.17	-4.38	-3.87	-1.11	-3.46	-4.57
	UNII6	6505	111	-4.23	-4.65	-1.43	-4.46	-4.86	-1.65	-4.21	-4.82	-1.49	-3.54	-4.96
	UNII7	6665	143	-3.92	-4.98	-1.41	-4.08	-4.92	-1.47	-4.23	-5.33	-1.73	-4.39	-5.80
	UNII8	6825	175	-4.25	-4.63	-1.43	-4.42	-4.97	-1.67	-5.20	-4.87	-2.02	-5.18	-6.61
		6985	207	-4.59	-5.10	-1.83	-4.54	-5.29	-1.89	-5.09	-5.13	-2.10	-5.18	-7.01
[HE80U] 484T	UNII5	6025	15	-6.88	-6.82	-3.84	-	-	-	-6.21	-6.39	-3.29	-3.46	-6.75
		6185	47	-6.04	-6.80	-3.40	-	-	-	-6.09	-6.91	-3.47	-3.46	-6.86
		6345	79	-7.18	-7.08	-4.12	-	-	-	-7.37	-6.62	-3.97	-3.46	-7.43
	UNII6	6505	111	-7.34	-7.50	-4.40	-	-	-	-7.20	-7.91	-4.53	-3.54	-7.94
	UNII7	6665	143	-6.86	-7.99	-4.38	-	-	-	-7.07	-8.20	-4.58	-4.39	-8.77
	UNII8	6825	175	-7.17	-7.82	-4.47	-	-	-	-7.72	-7.73	-4.71	-5.18	-9.65
		6985	207	-7.58	-8.25	-4.89	-	-	-	-7.78	-8.30	-5.02	-5.18	-10.08
[HE80U] 996T	UNII5	6025	15	-	-	-	-9.16	-9.41	-6.27	-	-	-	-3.46	-9.73
		6185	47	-	-	-	-9.04	-10.08	-6.52	-	-	-	-3.46	-9.98
		6345	79	-	-	-	-10.35	-10.14	-7.23	-	-	-	-3.46	-10.69
	UNII6	6505	111	-	-	-	-10.01	-10.14	-7.06	-	-	-	-3.54	-10.60
	UNII7	6665	143	-	-	-	-9.32	-10.68	-6.93	-	-	-	-4.39	-11.32
	UNII8	6825	175	-	-	-	-9.89	-10.55	-7.19	-	-	-	-5.18	-12.38
		6985	207	-	-	-	-10.24	-10.76	-7.48	-	-	-	-5.18	-12.66

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE160] SU	UNII5	6025	15	-	-	-	-11.56	-11.96	-8.75	-	-	-	-3.46	-12.21
		6185	47	-	-	-	-11.29	-12.14	-8.68	-	-	-	-3.46	-12.15
		6345	79	-	-	-	-11.37	-11.06	-8.20	-	-	-	-3.46	-11.66
	UNII6	6505	111	-	-	-	-11.50	-12.05	-8.75	-	-	-	-3.54	-12.29
	UNII7	6665	143	-	-	-	-11.19	-12.41	-8.75	-	-	-	-4.39	-13.14
	UNII8	6825	175	-	-	-	-11.41	-12.22	-8.79	-	-	-	-5.18	-13.97
		6985	207	-	-	-	-11.53	-12.76	-9.09	-	-	-	-5.18	-14.28

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
802.11a	UNII5	5935	2	-	-	-	-1.76	-3.03	0.66	-	-	-	-3.46	-2.80
		6175	45	-	-	-	-1.87	-2.38	0.89	-	-	-	-3.46	-2.57
		6415	93	-	-	-	-1.93	-1.85	1.12	-	-	-	-3.46	-2.34
	UNII6	6435	97	-	-	-	-2.12	-2.53	0.69	-	-	-	-3.54	-2.84
		6475	105	-	-	-	-2.15	-2.83	0.54	-	-	-	-3.54	-3.00
		6515	113	-	-	-	-2.06	-2.35	0.80	-	-	-	-3.54	-2.73
	UNII7	6535	117	-	-	-	-2.34	-2.87	0.41	-	-	-	-4.39	-3.98
		6695	149	-	-	-	-2.18	-3.07	0.40	-	-	-	-4.39	-3.99
		6855	181	-	-	-	-1.99	-3.10	0.50	-	-	-	-4.39	-3.89
	UNII8	6875	185	-	-	-	-2.32	-2.91	0.41	-	-	-	-5.18	-4.78
		6995	209	-	-	-	-2.43	-3.26	0.19	-	-	-	-5.18	-5.00
		7115	233	-	-	-	-3.50	-2.98	-0.22	-	-	-	-5.18	-5.41

Mode	Band	Freq. [MHz]	CH.	MIMO Total Average PSD[dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE160] 996*2T	UNII5	6025	15	-	-	-	-12.23	-12.09	-9.15	-	-	-	-3.46	-12.61
		6185	47	-	-	-	-11.71	-12.45	-9.05	-	-	-	-3.46	-12.51
		6345	79	-	-	-	-12.02	-11.30	-8.64	-	-	-	-3.46	-12.10
	UNII6	6505	111	-	-	-	-12.10	-12.14	-9.11	-	-	-	-3.54	-12.65
	UNII7	6665	143	-	-	-	-11.76	-12.73	-9.21	-	-	-	-4.39	-13.60
	UNII8	6825	175	-	-	-	-11.88	-12.73	-9.27	-	-	-	-5.18	-14.46
		6985	207	-	-	-	-11.91	-13.11	-9.46	-	-	-	-5.18	-14.64

**10.5 POWER SPECTRAL DENSITY(Standard client)**

- Limit : 17 dBm/MHz(e.i.r.p)

**10.5.1 Ant 1**

- EIRP PSD (dBm /MHz) = PSD (dBm/MHz) + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 26T	UNII5	5935	2	-5.709	-7.039	-5.769	-5.800	-11.509
		6175	45	6.444	5.031	6.610	-5.800	0.810
		6415	93	5.955	4.541	5.870	-5.800	0.155
	UNII7	6535	117	5.756	4.320	5.905	-7.400	-1.495
		6695	149	5.928	4.101	5.551	-7.400	-1.472
		6855	181	5.972	4.360	5.741	-7.400	-1.428

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 52T	UNII5	5935	2	-5.640	-5.784	-5.955	-5.800	-11.440
		6175	45	3.594	3.274	3.672	-5.800	-2.128
		6415	93	3.220	2.777	2.935	-5.800	-2.580
	UNII7	6535	117	2.878	2.565	2.645	-7.400	-4.522
		6695	149	2.903	2.526	2.532	-7.400	-4.497
		6855	181	2.910	2.883	2.929	-7.400	-4.471

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1		
[HE20] 106T	UNII5	5935	2	-5.315	-	-5.619	-5.800	-11.115
		6175	45	0.723	-	0.737	-5.800	-5.063
		6415	93	0.196	-	-0.117	-5.800	-5.604
	UNII7	6535	117	-0.258	-	0.005	-7.400	-7.395
		6695	149	-0.113	-	-0.121	-7.400	-7.513
		6855	181	0.115	-	-0.095	-7.400	-7.285

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE20] 242T	UNII5	5935	2	-	-5.777	-	-5.800	-11.577
		6175	45	-	-2.725	-	-5.800	-8.525
		6415	93	-	-2.354	-	-5.800	-8.154
	UNII7	6535	117	-	-2.534	-	-7.400	-9.934
		6695	149	-	-2.515	-	-7.400	-9.915
		6855	181	-	-2.318	-	-7.400	-9.718

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE20] SU	UNII5	5935	2	-	-1.844	-	-5.800	-7.644
		6175	45	-	-2.151	-	-5.800	-7.951
		6415	93	-	-2.428	-	-5.800	-8.228
	UNII7	6535	117	-	-2.800	-	-7.400	-10.200
		6695	149	-	-2.582	-	-7.400	-9.982
		6855	181	-	-2.575	-	-7.400	-9.975

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40] 26T	UNII5	5965	3	4.838	4.703	4.968	-5.800	-0.832
		6165	43	6.343	6.093	6.510	-5.800	0.710
		6405	91	5.736	5.369	5.532	-5.800	-0.064
	UNII7	6565	123	6.154	5.691	6.021	-7.400	-1.246
		6685	147	5.743	5.252	5.210	-7.400	-1.657
		6845	179	6.188	5.572	5.609	-7.400	-1.212
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40] 52T	UNII5	5965	3	1.994	1.871	2.187	-5.800	-3.613
		6165	43	3.623	3.546	3.865	-5.800	-1.935
		6405	91	3.197	2.985	2.812	-5.800	-2.603
	UNII7	6565	123	3.221	3.247	3.261	-7.400	-4.139
		6685	147	2.972	2.471	2.726	-7.400	-4.428
		6845	179	3.471	2.900	2.876	-7.400	-3.929

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40]	UNII5	5965	3	-0.919	-1.167	-0.710	-5.800	-6.510
		6165	43	0.686	0.379	0.723	-5.800	-5.077
		6405	91	0.155	-0.156	-0.027	-5.800	-5.645
106T	UNII7	6565	123	0.458	0.140	0.265	-7.400	-6.942
		6685	147	-0.127	-0.408	-0.461	-7.400	-7.527
		6845	179	0.389	0.092	-0.081	-7.400	-7.011

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40]	UNII5	5965	3	-3.850	-	-3.799	-5.800	-9.599
		6165	43	-2.823	-	-2.917	-5.800	-8.623
		6405	91	-3.607	-	-3.693	-5.800	-9.407
242T	UNII7	6565	123	-2.785	-	-2.917	-7.400	-10.185
		6685	147	-3.172	-	-3.397	-7.400	-10.572
		6845	179	-2.713	-	-3.198	-7.400	-10.113

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40]	UNII5	5965	3	-	-6.791	-	-5.800	-12.591
		6165	43	-	-5.905	-	-5.800	-11.705
		6405	91	-	-6.456	-	-5.800	-12.256
484T	UNII7	6565	123	-	-5.732	-	-7.400	-13.132
		6685	147	-	-5.953	-	-7.400	-13.353
		6845	179	-	-5.574	-	-7.400	-12.974
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE40]	UNII5	5965	3	-	-6.111	-	-5.800	-11.911
		6165	43	-	-5.156	-	-5.800	-10.956
		6405	91	-	-5.358	-	-5.800	-11.158
SU	UNII7	6565	123	-	-5.216	-	-7.400	-12.616
		6685	147	-	-5.471	-	-7.400	-12.871
		6845	179	-	-5.311	-	-7.400	-12.711

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80] 26T	UNII5	5985	7	4.808	3.545	5.409	-5.800	-0.391
		6145	39	6.288	5.034	6.551	-5.800	0.751
		6385	87	5.669	4.285	5.483	-5.800	-0.131
	UNII7	6625	135	6.068	4.254	5.310	-7.400	-1.332
		6705	151	5.785	3.808	5.077	-7.400	-1.615
		6785	167	5.998	4.557	5.737	-7.400	-1.402

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80] 52T	UNII5	5985	7	2.054	2.125	2.436	-5.800	-3.364
		6145	39	3.604	3.380	3.844	-5.800	-1.956
		6385	87	2.992	2.666	2.746	-5.800	-2.808
	UNII7	6625	135	3.326	2.701	2.609	-7.400	-4.074
		6705	151	2.765	2.281	1.966	-7.400	-4.635
		6785	167	3.151	2.993	2.887	-7.400	-4.249

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80] 106T	UNII5	5985	7	-0.963	-0.963	-0.578	-5.800	-6.378
		6145	39	0.619	0.393	0.798	-5.800	-5.002
		6385	87	-0.201	-0.494	-0.324	-5.800	-6.001
	UNII7	6625	135	0.260	-0.494	-0.371	-7.400	-7.140
		6705	151	-0.198	-0.878	-1.057	-7.400	-7.598
		6785	167	0.093	-0.147	-0.355	-7.400	-7.307
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80] 242T	UNII5	5985	7	-3.879	-3.999	-3.334	-5.800	-9.134
		6145	39	-2.915	-2.889	-2.694	-5.800	-8.494
		6385	87	-3.698	-3.886	-3.821	-5.800	-9.498
	UNII7	6625	135	-2.858	-3.068	-3.504	-7.400	-10.258
		6705	151	-3.217	-3.592	-3.891	-7.400	-10.617
		6785	167	-2.749	-2.996	-3.363	-7.400	-10.149

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80]	UNII5	5985	7	-7.015	-	-6.467	-5.800	-12.267
		6145	39	-5.865	-	-5.893	-5.800	-11.665
		6385	87	-6.744	-	-6.905	-5.800	-12.544
484T	UNII7	6625	135	-5.805	-	-6.238	-7.400	-13.205
		6705	151	-6.257	-	-6.863	-7.400	-13.657
		6785	167	-5.800	-	-6.280	-7.400	-13.200

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80]	UNII5	5985	7	-	-9.562	-	-5.800	-15.362
		6145	39	-	-8.931	-	-5.800	-14.731
		6385	87	-	-9.903	-	-5.800	-15.703
996T	UNII7	6625	135	-	-8.990	-	-7.400	-16.390
		6705	151	-	-9.192	-	-7.400	-16.592
		6785	167	-	-8.978	-	-7.400	-16.378

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80]	UNII5	5985	7	-	-9.143	-	-5.800	-14.943
		6145	39	-	-8.073	-	-5.800	-13.873
		6385	87	-	-8.639	-	-5.800	-14.439
SU	UNII7	6625	135	-	-8.593	-	-7.400	-15.993
		6705	151	-	-9.028	-	-7.400	-16.428
		6785	167	-	-8.721	-	-7.400	-16.121

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L]	UNII5	6025	15	4.355	3.119	4.769	-5.800	-1.031
		6185	47	5.284	4.263	5.539	-5.800	-0.261
		6345	79	5.778	4.541	5.092	-5.800	-0.022
	UNII7	6665	143	6.314	4.764	5.701	-7.400	-1.086

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 52T	UNII5	6025	15	1.631	1.755	2.094	-5.800	-3.706
		6185	47	2.660	2.764	2.608	-5.800	-3.036
		6345	79	2.940	3.012	2.373	-5.800	-2.788
	UNII7	6665	143	3.420	2.928	2.662	-7.400	-3.980

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 106T	UNII5	6025	15	-1.103	-0.921	-0.858	-5.800	-6.658
		6185	47	-0.054	-0.164	-0.236	-5.800	-5.854
		6345	79	0.057	-0.174	-0.623	-5.800	-5.743
	UNII7	6665	143	0.483	-0.149	-0.174	-7.400	-6.917

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 242T	UNII5	6025	15	-4.353	-4.240	-3.801	-5.800	-9.601
		6185	47	-3.043	-3.256	-3.482	-5.800	-8.843
		6345	79	-3.507	-3.557	-3.841	-5.800	-9.307
	UNII7	6665	143	-2.903	-2.976	-3.765	-7.400	-10.303

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 484T	UNII5	6025	15	-7.298	-	-6.897	-5.800	-12.697
		6185	47	-6.150	-	-6.444	-5.800	-11.950
		6345	79	-6.582	-	-6.489	-5.800	-12.289
	UNII7	6665	143	-6.060	-	-6.766	-7.400	-13.460
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80L] 996T	UNII5	6025	15	-	-10.143	-	-5.800	-15.943
		6185	47	-	-9.401	-	-5.800	-15.201
		6345	79	-	-9.698	-	-5.800	-15.498
	UNII7	6665	143	-	-8.640	-	-7.400	-16.040

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 26T	UNII5	6025	15	4.779	3.734	5.761	-5.800	-0.039
		6185	47	5.367	4.820	5.925	-5.800	0.125
		6345	79	4.985	3.870	4.795	-5.800	-0.815
		6665	143	5.230	4.100	4.563	-7.400	-2.170

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 52T	UNII5	6025	15	2.043	2.534	3.121	-5.800	-2.679
		6185	47	2.573	3.026	3.145	-5.800	-2.655
		6345	79	2.432	2.003	2.068	-5.800	-3.368
		6665	143	2.594	2.456	2.228	-7.400	-4.806

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 106T	UNII5	6025	15	-1.054	-0.502	-0.106	-5.800	-5.906
		6185	47	-0.146	0.086	-0.128	-5.800	-5.714
		6345	79	-0.821	-0.941	-0.853	-5.800	-6.621
		6665	143	-0.409	-0.701	-0.862	-7.400	-7.809

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 242T	UNII5	6025	15	-3.868	-3.776	-3.124	-5.800	-8.924
		6185	47	-3.244	-2.979	-2.974	-5.800	-8.774
		6345	79	-4.223	-4.306	-4.380	-5.800	-10.023
		6665	143	-3.915	-4.083	-4.227	-7.400	-11.315
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 484T	UNII5	6025	15	-6.875	-	-6.213	-5.800	-12.013
		6185	47	-6.044	-	-6.092	-5.800	-11.844
		6345	79	-7.183	-	-7.367	-5.800	-12.983
		6665	143	-6.862	-	-7.065	-7.400	-14.262

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE80U] 996T	UNII5	6025	15	-	-9.155	-	-5.800	-14.955
		6185	47	-	-9.039	-	-5.800	-14.839
		6345	79	-	-10.354	-	-5.800	-16.154
	UNII7	6665	143	-	-9.320	-	-7.400	-16.720

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE160] 996*2T	UNII5	6025	15	-	-12.226	-	-5.800	-18.026
		6185	47	-	-11.707	-	-5.800	-17.507
		6345	79	-	-12.016	-	-5.800	-17.816
	UNII7	6665	143	-	-11.757	-	-7.400	-19.157

Mode	Band	Freq.[MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
[HE160] SU	UNII5	6025	15	-	-11.557	-	-5.800	-17.357
		6185	47	-	-11.294	-	-5.800	-17.094
		6345	79	-	-11.374	-	-5.800	-17.174
	UNII7	6665	143	-	-11.186	-	-7.400	-18.586

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD [dBm/MHz]
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT1	ANT1	ANT1	[dBi]	
802.11a	UNII5	5935	2	-	-1.863	-	-5.800	-7.663
		6175	45	-	-1.979	-	-5.800	-7.779
		6415	93	-	-2.033	-	-5.800	-7.833
	UNII7	6535	117	-	-2.443	-	-7.400	-9.843
		6695	149	-	-2.289	-	-7.400	-9.689
		6855	181	-	-2.099	-	-7.400	-9.499

**10.5.2 Ant 2**

· EIRP PSD (dBm /MHz) = PSD (dBm/MHz) + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 26T	UNII5	5935	2	-6.495	-7.996	-6.720	-7.200	-13.695
		6175	45	5.547	3.886	5.535	-7.200	-1.653
		6415	93	6.366	4.696	6.045	-7.200	-0.834
	UNII7	6535	117	5.151	3.507	4.946	-7.400	-2.249
		6695	149	5.155	3.594	5.183	-7.400	-2.217
		6855	181	5.069	3.445	5.017	-7.400	-2.331

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 52T	UNII5	5935	2	-6.317	-6.529	-6.489	-7.200	-13.517
		6175	45	2.502	2.226	2.772	-7.200	-4.428
		6415	93	3.630	3.103	3.169	-7.200	-3.570
	UNII7	6535	117	2.199	1.949	2.023	-7.400	-5.201
		6695	149	2.332	2.058	2.189	-7.400	-5.068
		6855	181	2.182	2.037	2.069	-7.400	-5.218

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 106T	UNII5	5935	2	-6.992	-	-7.078	-7.200	-14.192
		6175	45	-0.529	-	-0.196	-7.200	-7.396
		6415	93	0.321	-	0.300	-7.200	-6.879
	UNII7	6535	117	-0.697	-	-0.878	-7.400	-8.097
		6695	149	-0.755	-	-0.814	-7.400	-8.155
		6855	181	-0.773	-	-0.835	-7.400	-8.173

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] 242T	UNII5	5935	2	-	-7.464	-	-7.200	-14.664
		6175	45	-	-3.754	-	-7.200	-10.954
		6415	93	-	-2.108	-	-7.200	-9.308
	UNII7	6535	117	-	-3.119	-	-7.400	-10.519
		6695	149	-	-3.195	-	-7.400	-10.595
		6855	181	-	-3.429	-	-7.400	-10.829

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE20] SU	UNII5	5935	2	-	-3.452	-	-7.200	-10.652
		6175	45	-	-2.924	-	-7.200	-10.124
		6415	93	-	-2.071	-	-7.200	-9.271
	UNII7	6535	117	-	-3.138	-	-7.400	-10.538
		6695	149	-	-3.387	-	-7.400	-10.787
		6855	181	-	-3.288	-	-7.400	-10.688

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40] 26T	UNII5	5965	3	5.080	4.689	5.212	-7.200	-1.988
		6165	43	5.226	4.978	5.509	-7.200	-1.691
		6405	91	6.054	5.716	6.372	-7.200	-0.828
	UNII7	6565	123	5.035	4.921	5.216	-7.400	-2.184
		6685	147	4.885	4.723	4.810	-7.400	-2.515
		6845	179	4.946	4.760	4.986	-7.400	-2.414
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40] 52T	UNII5	5965	3	2.404	2.139	2.466	-7.200	-4.734
		6165	43	2.507	2.528	2.591	-7.200	-4.609
		6405	91	3.552	3.067	3.240	-7.200	-3.648
	UNII7	6565	123	2.471	2.117	2.203	-7.400	-4.929
		6685	147	2.243	1.988	2.102	-7.400	-5.157
		6845	179	2.171	2.004	2.133	-7.400	-5.229

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40]	UNII5	5965	3	-0.791	-1.049	-0.791	-7.200	-7.991
		6165	43	-0.598	-0.648	-0.403	-7.200	-7.603
		6405	91	0.407	0.215	0.271	-7.200	-6.793
106T	UNII7	6565	123	-0.522	-0.908	-0.565	-7.400	-7.922
		6685	147	-0.748	-0.768	-0.747	-7.400	-8.147
		6845	179	-0.691	-0.945	-0.782	-7.400	-8.091

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40]	UNII5	5965	3	-3.870	-	-3.860	-7.200	-11.060
		6165	43	-4.134	-	-3.897	-7.200	-11.097
		6405	91	-3.339	-	-3.361	-7.200	-10.539
242T	UNII7	6565	123	-3.858	-	-3.874	-7.400	-11.258
		6685	147	-3.912	-	-3.782	-7.400	-11.182
		6845	179	-3.857	-	-3.994	-7.400	-11.257

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40]	UNII5	5965	3	-	-6.697	-	-7.200	-13.897
		6165	43	-	-6.935	-	-7.200	-14.135
		6405	91	-	-6.128	-	-7.200	-13.328
484T	UNII7	6565	123	-	-6.696	-	-7.400	-14.096
		6685	147	-	-6.747	-	-7.400	-14.147
		6845	179	-	-6.708	-	-7.400	-14.108
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE40]	UNII5	5965	3	-	-6.445	-	-7.200	-13.645
		6165	43	-	-5.908	-	-7.200	-13.108
		6405	91	-	-5.178	-	-7.200	-12.378
SU	UNII7	6565	123	-	-6.165	-	-7.400	-13.565
		6685	147	-	-6.299	-	-7.400	-13.699
		6845	179	-	-6.417	-	-7.400	-13.817

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 26T	UNII5	5985	7	5.136	3.752	5.355	-7.200	-1.845
		6145	39	5.459	3.834	5.504	-7.200	-1.696
		6385	87	5.931	4.733	5.841	-7.200	-1.269
	UNII7	6625	135	5.682	4.195	5.149	-7.400	-1.718
		6705	151	4.993	3.423	4.207	-7.400	-2.407
		6785	167	4.875	3.705	5.080	-7.400	-2.320

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 52T	UNII5	5985	7	2.254	2.017	2.550	-7.200	-4.650
		6145	39	2.677	2.294	2.828	-7.200	-4.372
		6385	87	3.126	2.780	3.014	-7.200	-4.074
	UNII7	6625	135	3.088	2.220	2.637	-7.400	-4.312
		6705	151	2.068	1.862	1.657	-7.400	-5.332
		6785	167	2.151	1.942	2.354	-7.400	-5.046

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 106T	UNII5	5985	7	-0.873	-0.827	-0.613	-7.200	-7.813
		6145	39	-0.406	-0.665	-0.558	-7.200	-7.606
		6385	87	0.042	-0.212	-0.011	-7.200	-7.158
	UNII7	6625	135	0.063	-0.886	-0.834	-7.400	-7.337
		6705	151	-0.880	-1.209	-1.440	-7.400	-8.280
		6785	167	-0.826	-1.076	-0.939	-7.400	-8.226
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 242T	UNII5	5985	7	-3.944	-3.945	-3.581	-7.200	-10.781
		6145	39	-3.715	-4.135	-3.989	-7.200	-10.915
		6385	87	-3.457	-3.536	-3.475	-7.200	-10.657
	UNII7	6625	135	-3.092	-3.455	-3.791	-7.400	-10.492
		6705	151	-3.968	-4.017	-4.234	-7.400	-11.368
		6785	167	-3.938	-3.889	-4.007	-7.400	-11.289

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 484T	UNII5	5985	7	-6.934	-	-6.621	-7.200	-13.821
		6145	39	-6.698	-	-7.067	-7.200	-13.898
		6385	87	-6.510	-	-6.452	-7.200	-13.652
	UNII7	6625	135	-5.915	-	-6.780	-7.400	-13.315
		6705	151	-6.959	-	-7.147	-7.400	-14.359
		6785	167	-6.832	-	-6.943	-7.400	-14.232

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] 996T	UNII5	5985	7	-	-9.614	-	-7.200	-16.814
		6145	39	-	-9.994	-	-7.200	-17.194
		6385	87	-	-9.496	-	-7.200	-16.696
	UNII7	6625	135	-	-9.118	-	-7.400	-16.518
		6705	151	-	-9.834	-	-7.400	-17.234
		6785	167	-	-9.982	-	-7.400	-17.382

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80] SU	UNII5	5985	7	-	-9.107	-	-7.200	-16.307
		6145	39	-	-8.962	-	-7.200	-16.162
		6385	87	-	-8.461	-	-7.200	-15.661
	UNII7	6625	135	-	-8.810	-	-7.400	-16.210
		6705	151	-	-9.524	-	-7.400	-16.924
		6785	167	-	-9.522	-	-7.400	-16.922

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 26T	UNII5	6025	15	4.543	3.469	4.664	-7.200	-2.536
		6185	47	5.015	3.456	4.542	-7.200	-2.185
		6345	79	5.928	4.947	5.385	-7.200	-1.272
	UNII7	6665	143	4.860	3.662	4.622	-7.400	-2.540

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 52T	UNII5	6025	15	2.015	2.121	2.248	-7.200	-4.952
		6185	47	2.526	2.031	1.847	-7.200	-4.674
		6345	79	3.083	3.095	2.822	-7.200	-4.105
	UNII7	6665	143	2.431	2.070	1.619	-7.400	-4.969

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 106T	UNII5	6025	15	-1.129	-0.902	-0.686	-7.200	-7.886
		6185	47	-0.803	-1.239	-1.175	-7.200	-8.003
		6345	79	0.247	0.329	-0.359	-7.200	-6.871
	UNII7	6665	143	-0.311	-0.986	-1.594	-7.400	-7.711

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 242T	UNII5	6025	15	-4.099	-3.958	-3.614	-7.200	-10.814
		6185	47	-3.882	-3.679	-4.365	-7.200	-10.879
		6345	79	-3.096	-3.167	-3.755	-7.200	-10.296
	UNII7	6665	143	-4.009	-4.235	-4.868	-7.400	-11.409

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 484T	UNII5	6025	15	-6.871	-	-6.754	-7.200	-13.954
		6185	47	-6.735	-	-7.259	-7.200	-13.935
		6345	79	-6.150	-	-6.390	-7.200	-13.350
	UNII7	6665	143	-7.099	-	-7.814	-7.400	-14.499
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80L] 996T	UNII5	6025	15	-	-9.963	-	-7.200	-17.163
		6185	47	-	-10.096	-	-7.200	-17.296
		6345	79	-	-9.240	-	-7.200	-16.440
	UNII7	6665	143	-	-9.806	-	-7.400	-17.206

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 26T	UNII5	6025	15	5.274	4.173	5.756	-7.200	-1.444
		6185	47	4.459	3.612	4.475	-7.200	-2.725
		6345	79	5.251	4.050	5.167	-7.200	-1.949
	UNII7	6665	143	4.356	3.046	3.833	-7.400	-3.044

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 52T	UNII5	6025	15	2.071	2.404	2.896	-7.200	-4.304
		6185	47	1.982	2.222	1.932	-7.200	-4.978
		6345	79	3.087	2.811	2.469	-7.200	-4.113
	UNII7	6665	143	1.679	1.597	1.194	-7.400	-5.721

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 106T	UNII5	6025	15	-0.858	-0.626	-0.071	-7.200	-7.271
		6185	47	-1.007	-0.911	-1.067	-7.200	-8.111
		6345	79	-0.318	-0.240	-0.386	-7.200	-7.440
	UNII7	6665	143	-1.524	-1.588	-1.896	-7.400	-8.924

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 242T	UNII5	6025	15	-4.024	-3.780	-3.176	-7.200	-10.376
		6185	47	-4.057	-3.937	-4.098	-7.200	-11.137
		6345	79	-4.021	-4.061	-3.871	-7.200	-11.071
	UNII7	6665	143	-4.982	-4.923	-5.326	-7.400	-12.323
Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 484T	UNII5	6025	15	-6.821	-	-6.390	-7.200	-13.590
		6185	47	-6.804	-	-6.906	-7.200	-14.004
		6345	79	-7.084	-	-6.618	-7.200	-13.818
	UNII7	6665	143	-7.986	-	-8.195	-7.400	-15.386

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE80U] 996T	UNII5	6025	15	-	-9.407	-	-7.200	-16.607
		6185	47	-	-10.083	-	-7.200	-17.283
		6345	79	-	-10.135	-	-7.200	-17.335
	UNII7	6665	143	-	-10.676	-	-7.400	-18.076

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE160] 996*2T	UNII5	6025	15	-	-12.086	-	-7.200	-19.286
		6185	47	-	-12.448	-	-7.200	-19.648
		6345	79	-	-11.304	-	-7.200	-18.504
	UNII7	6665	143	-	-12.731	-	-7.400	-20.131

Mode	Band	Freq.[MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
[HE160] SU	UNII5	6025	15	-	-11.964	-	-7.200	-19.164
		6185	47	-	-12.135	-	-7.200	-19.335
		6345	79	-	-11.056	-	-7.200	-18.256
	UNII7	6665	143	-	-12.413	-	-7.400	-19.813

Mode	Band	Freq. [MHz]	CH.	Total Power Spectral Density [dBm/MHz]			Directional Gain	Maximum E.I.R.P SD
				RU Index : Low	RU Index : Mid	RU Index : High		
				ANT2	ANT2	ANT2	[dBi]	
802.11a	UNII5	5935	2	-	-3.139	-	-7.200	-10.339
		6175	45	-	-2.488	-	-7.200	-9.688
		6415	93	-	-1.952	-	-7.200	-9.152
	UNII7	6535	117	-	-2.979	-	-7.400	-10.379
		6695	149	-	-3.176	-	-7.400	-10.576
		6855	181	-	-3.209	-	-7.400	-10.609

**10.5.3 SUM (MIMO)**

· EIRP MIMO PSD (dBm /MHz) = SUM (Ant1 + Ant2) + Directional Gain (dBi)

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-5.71	-6.50	-3.07	-7.04	-8.00	-4.48	-5.77	-6.72	-3.21	-3.46	-6.54
		6175	45	6.44	5.55	9.03	5.03	3.89	7.51	6.61	5.54	9.12	-3.46	5.65
		6415	93	5.96	6.37	9.18	4.54	4.70	7.63	5.87	6.05	8.97	-3.46	5.71
	UNII7	6535	117	5.76	5.15	8.47	4.32	3.51	6.94	5.91	4.95	8.46	-4.39	4.08
		6695	149	5.93	5.16	8.57	4.10	3.59	6.87	5.55	5.18	8.38	-4.39	4.18
		6855	181	5.97	5.07	8.55	4.36	3.45	6.94	5.74	5.02	8.40	-4.39	4.16

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-5.64	-6.32	-2.96	-5.78	-6.53	-3.13	-5.96	-6.49	-3.20	-3.46	-6.42
		6175	45	3.59	2.50	6.09	3.27	2.23	5.79	3.67	2.77	6.26	-3.46	2.79
		6415	93	3.22	3.63	6.44	2.78	3.10	5.95	2.94	3.17	6.06	-3.46	2.98
	UNII7	6535	117	2.88	2.20	5.56	2.57	1.95	5.28	2.65	2.02	5.36	-4.39	1.17
		6695	149	2.90	2.33	5.64	2.53	2.06	5.31	2.53	2.19	5.37	-4.39	1.25
		6855	181	2.91	2.18	5.57	2.88	2.04	5.49	2.93	2.07	5.53	-4.39	1.18

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-5.32	-6.99	-3.06	-	-	-	-5.62	-7.08	-3.28	-3.46	-6.52
		6175	45	0.72	-0.53	3.15	-	-	-	0.74	-0.20	3.31	-3.46	-0.16
		6415	93	0.20	0.32	3.27	-	-	-	-0.12	0.30	3.11	-3.46	-0.19
	UNII7	6535	117	-0.26	-0.70	2.54	-	-	-	0.01	-0.88	2.60	-4.39	-1.79
		6695	149	-0.11	-0.76	2.59	-	-	-	-0.12	-0.81	2.56	-4.39	-1.80
		6855	181	0.12	-0.77	2.70	-	-	-	-0.10	-0.84	2.56	-4.39	-1.69

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-	-	-	-5.78	-7.46	-3.53	-	-	-	-3.46	-6.99
		6175	45	-	-	-	-2.73	-3.75	-0.20	-	-	-	-3.46	-3.66
		6415	93	-	-	-	-2.35	-2.11	0.78	-	-	-	-3.46	-2.68
	242T	6535	117	-	-	-	-2.53	-3.12	0.19	-	-	-	-4.39	-4.20
		6695	149	-	-	-	-2.52	-3.20	0.17	-	-	-	-4.39	-4.22
		6855	181	-	-	-	-2.32	-3.43	0.17	-	-	-	-4.39	-4.22

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE20]	UNII5	5935	2	-	-	-	-1.84	-3.45	0.44	-	-	-	-3.46	-3.03
		6175	45	-	-	-	-2.15	-2.92	0.49	-	-	-	-3.46	-2.97
		6415	93	-	-	-	-2.43	-2.07	0.76	-	-	-	-3.46	-2.70
	SU	6535	117	-	-	-	-2.80	-3.14	0.04	-	-	-	-4.39	-4.35
		6695	149	-	-	-	-2.58	-3.39	0.04	-	-	-	-4.39	-4.35
		6855	181	-	-	-	-2.58	-3.29	0.09	-	-	-	-4.39	-4.30

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	4.84	5.08	7.97	4.70	4.69	7.71	4.97	5.21	8.10	-3.46	4.64
		6165	43	6.34	5.23	8.83	6.09	4.98	8.58	6.51	5.51	9.05	-3.46	5.59
		6405	91	5.74	6.05	8.91	5.37	5.72	8.56	5.53	6.37	8.98	-3.46	5.52
	26T	6565	123	6.15	5.04	8.64	5.69	4.92	8.33	6.02	5.22	8.65	-4.39	4.26
		6685	147	5.74	4.89	8.35	5.25	4.72	8.01	5.21	4.81	8.02	-4.39	3.96
		6845	179	6.19	4.95	8.62	5.57	4.76	8.20	5.61	4.99	8.32	-4.39	4.23

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	1.99	2.40	5.21	1.87	2.14	5.02	2.19	2.47	5.34	-3.46	1.88
		6165	43	3.62	2.51	6.11	3.55	2.53	6.08	3.87	2.59	6.28	-3.46	2.82
		6405	91	3.20	3.55	6.39	2.99	3.07	6.04	2.81	3.24	6.04	-3.46	2.93
	UNII7	6565	123	3.22	2.47	5.87	3.25	2.12	5.73	3.26	2.20	5.77	-4.39	1.48
		6685	147	2.97	2.24	5.63	2.47	1.99	5.25	2.73	2.10	5.44	-4.39	1.24
		6845	179	3.47	2.17	5.88	2.90	2.00	5.49	2.88	2.13	5.53	-4.39	1.49

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-0.92	-0.79	2.16	-1.17	-1.05	1.90	-0.71	-0.79	2.26	-3.46	-1.20
		6165	43	0.69	-0.60	3.10	0.38	-0.65	2.91	0.72	-0.40	3.21	-3.46	-0.25
		6405	91	0.16	0.41	3.29	-0.16	0.22	3.04	-0.03	0.27	3.13	-3.46	-0.17
	UNII7	6565	123	0.46	-0.52	3.01	0.14	-0.91	2.66	0.27	-0.57	2.88	-4.39	-1.38
		6685	147	-0.13	-0.75	2.58	-0.41	-0.77	2.43	-0.46	-0.75	2.41	-4.39	-1.81
		6845	179	0.39	-0.69	2.89	0.09	-0.95	2.61	-0.08	-0.78	2.59	-4.39	-1.50

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-3.85	-3.87	-0.85	-	-	-	-3.80	-3.86	-0.82	-3.46	-4.28
		6165	43	-2.82	-4.13	-0.42	-	-	-	-2.92	-3.90	-0.37	-3.46	-3.83
		6405	91	-3.61	-3.34	-0.46	-	-	-	-3.69	-3.36	-0.51	-3.46	-3.92
	UNII7	6565	123	-2.79	-3.86	-0.28	-	-	-	-2.92	-3.87	-0.36	-4.39	-4.67
		6685	147	-3.17	-3.91	-0.52	-	-	-	-3.40	-3.78	-0.57	-4.39	-4.91
		6845	179	-2.71	-3.86	-0.24	-	-	-	-3.20	-3.99	-0.57	-4.39	-4.63

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-	-	-	-6.79	-6.70	-3.73	-	-	-	-3.46	-7.19
		6165	43	-	-	-	-5.91	-6.94	-3.38	-	-	-	-3.46	-6.84
		6405	91	-	-	-	-6.46	-6.13	-3.28	-	-	-	-3.46	-6.74
484T	UNII7	6565	123	-	-	-	-5.73	-6.70	-3.18	-	-	-	-4.39	-7.57
		6685	147	-	-	-	-5.95	-6.75	-3.32	-	-	-	-4.39	-7.71
		6845	179	-	-	-	-5.57	-6.71	-3.09	-	-	-	-4.39	-7.48

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE40]	UNII5	5965	3	-	-	-	-6.11	-6.45	-3.26	-	-	-	-3.46	-6.73
		6165	43	-	-	-	-5.16	-5.91	-2.51	-	-	-	-3.46	-5.97
		6405	91	-	-	-	-5.36	-5.18	-2.26	-	-	-	-3.46	-5.72
SU	UNII7	6565	123	-	-	-	-5.22	-6.17	-2.65	-	-	-	-4.39	-7.04
		6685	147	-	-	-	-5.47	-6.30	-2.85	-	-	-	-4.39	-7.24
		6845	179	-	-	-	-5.31	-6.42	-2.82	-	-	-	-4.39	-7.21

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	4.81	5.14	7.99	3.55	3.75	6.66	5.41	5.36	8.39	-3.46	4.93
		6145	39	6.29	5.46	8.90	5.03	3.83	7.49	6.55	5.50	9.07	-3.46	5.61
		6385	87	5.67	5.93	8.81	4.29	4.73	7.53	5.48	5.84	8.68	-3.46	5.35
26T	UNII7	6625	135	6.07	5.68	8.89	4.25	4.20	7.23	5.31	5.15	8.24	-4.39	4.50
		6705	151	5.79	4.99	8.42	3.81	3.42	6.63	5.08	4.21	7.67	-4.39	4.03
		6785	167	6.00	4.88	8.48	4.56	3.71	7.16	5.74	5.08	8.43	-4.39	4.09

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	2.05	2.25	5.17	2.13	2.02	5.08	2.44	2.55	5.50	-3.46	2.04
		6145	39	3.60	2.68	6.18	3.38	2.29	5.88	3.84	2.83	6.38	-3.46	2.91
		6385	87	2.99	3.13	6.07	2.67	2.78	5.73	2.75	3.01	5.89	-3.46	2.61
52T	UNII7	6625	135	3.33	3.09	6.22	2.70	2.22	5.48	2.61	2.64	5.63	-4.39	1.83
		6705	151	2.77	2.07	5.44	2.28	1.86	5.09	1.97	1.66	4.82	-4.39	1.05
		6785	167	3.15	2.15	5.69	2.99	1.94	5.51	2.89	2.35	5.64	-4.39	1.30

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	-0.96	-0.87	2.09	-0.96	-0.83	2.12	-0.58	-0.61	2.41	-3.46	-1.05
		6145	39	0.62	-0.41	3.15	0.39	-0.67	2.91	0.80	-0.56	3.18	-3.46	-0.28
		6385	87	-0.20	0.04	2.93	-0.49	-0.21	2.66	-0.32	-0.01	2.85	-3.46	-0.53
106T	UNII7	6625	135	0.26	0.06	3.17	-0.49	-0.89	2.32	-0.37	-0.83	2.41	-4.39	-1.22
		6705	151	-0.20	-0.88	2.48	-0.88	-1.21	1.97	-1.06	-1.44	1.77	-4.39	-1.91
		6785	167	0.09	-0.83	2.67	-0.15	-1.08	2.42	-0.36	-0.94	2.37	-4.39	-1.72

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	-3.88	-3.94	-0.90	-4.00	-3.95	-0.96	-3.33	-3.58	-0.45	-3.46	-3.91
		6145	39	-2.92	-3.72	-0.29	-2.89	-4.14	-0.46	-2.69	-3.99	-0.28	-3.46	-3.74
		6385	87	-3.70	-3.46	-0.57	-3.89	-3.54	-0.70	-3.82	-3.48	-0.63	-3.46	-4.03
242T	UNII7	6625	135	-2.86	-3.09	0.04	-3.07	-3.46	-0.25	-3.50	-3.79	-0.63	-4.39	-4.35
		6705	151	-3.22	-3.97	-0.57	-3.59	-4.02	-0.79	-3.89	-4.23	-1.05	-4.39	-4.96
		6785	167	-2.75	-3.94	-0.29	-3.00	-3.89	-0.41	-3.36	-4.01	-0.66	-4.39	-4.68

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	-7.02	-6.93	-3.96	-	-	-	-6.47	-6.62	-3.53	-3.46	-6.99
		6145	39	-5.87	-6.70	-3.25	-	-	-	-5.89	-7.07	-3.43	-3.46	-6.71
		6385	87	-6.74	-6.51	-3.62	-	-	-	-6.91	-6.45	-3.66	-3.46	-7.08
484T	UNII7	6625	135	-5.81	-5.92	-2.85	-	-	-	-6.24	-6.78	-3.49	-4.39	-7.24
		6705	151	-6.26	-6.96	-3.58	-	-	-	-6.86	-7.15	-3.99	-4.39	-7.97
		6785	167	-5.80	-6.83	-3.28	-	-	-	-6.28	-6.94	-3.59	-4.39	-7.66

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	-	-	-	-9.56	-9.61	-6.58	-	-	-	-3.46	-10.04
		6145	39	-	-	-	-8.93	-9.99	-6.42	-	-	-	-3.46	-9.88
		6385	87	-	-	-	-9.90	-9.50	-6.68	-	-	-	-3.46	-10.15
996T	UNII7	6625	135	-	-	-	-8.99	-9.12	-6.04	-	-	-	-4.39	-10.43
		6705	151	-	-	-	-9.19	-9.83	-6.49	-	-	-	-4.39	-10.88
		6785	167	-	-	-	-8.98	-9.98	-6.44	-	-	-	-4.39	-10.83

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80]	UNII5	5985	7	-	-	-	-9.14	-9.11	-6.11	-	-	-	-3.46	-9.58
		6145	39	-	-	-	-8.07	-8.96	-5.48	-	-	-	-3.46	-8.95
		6385	87	-	-	-	-8.64	-8.46	-5.54	-	-	-	-3.46	-9.00
SU	UNII7	6625	135	-	-	-	-8.59	-8.81	-5.69	-	-	-	-4.39	-10.08
		6705	151	-	-	-	-9.03	-9.52	-6.26	-	-	-	-4.39	-10.65
		6785	167	-	-	-	-8.72	-9.52	-6.09	-	-	-	-4.39	-10.48

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L]	UNII5	6025	15	4.36	4.54	7.46	3.12	3.47	6.31	4.77	4.66	7.73	-3.46	4.27
		6185	47	5.28	5.02	8.16	4.26	3.46	6.89	5.54	4.54	8.08	-3.46	4.70
		6345	79	5.78	5.93	8.86	4.54	4.95	7.76	5.09	5.39	8.25	-3.46	5.40
26T	UNII7	6665	143	6.31	4.86	8.66	4.76	3.66	7.26	5.70	4.62	8.21	-4.39	4.27

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 52T	UNII5	6025	15	1.63	2.02	4.84	1.76	2.12	4.95	2.09	2.25	5.18	-3.46	1.72
		6185	47	2.66	2.53	5.60	2.76	2.03	5.42	2.61	1.85	5.25	-3.46	2.14
		6345	79	2.94	3.08	6.02	3.01	3.10	6.06	2.37	2.82	5.61	-3.46	2.60
	UNII7	6665	143	3.42	2.43	5.96	2.93	2.07	5.53	2.66	1.62	5.18	-4.39	1.57

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 106T	UNII5	6025	15	-1.10	-1.13	1.89	-0.92	-0.90	2.10	-0.86	-0.69	2.24	-3.46	-1.22
		6185	47	-0.05	-0.80	2.60	-0.16	-1.24	2.34	-0.24	-1.18	2.33	-3.46	-0.86
		6345	79	0.06	0.25	3.16	-0.17	0.33	3.10	-0.62	-0.36	2.52	-3.46	-0.30
	UNII7	6665	143	0.48	-0.31	3.11	-0.15	-0.99	2.46	-0.17	-1.59	2.18	-4.39	-1.28

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 242T	UNII5	6025	15	-4.35	-4.10	-1.21	-4.24	-3.96	-1.09	-3.80	-3.61	-0.70	-3.46	-4.16
		6185	47	-3.04	-3.88	-0.43	-3.26	-3.68	-0.45	-3.48	-4.37	-0.89	-3.46	-3.89
		6345	79	-3.51	-3.10	-0.29	-3.56	-3.17	-0.35	-3.84	-3.76	-0.79	-3.46	-3.75
	UNII7	6665	143	-2.90	-4.01	-0.41	-2.98	-4.24	-0.55	-3.77	-4.87	-1.27	-4.39	-4.80

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 484T	UNII5	6025	15	-7.30	-6.87	-4.07	-	-	-	-6.90	-6.75	-3.81	-3.46	-7.28
		6185	47	-6.15	-6.74	-3.42	-	-	-	-6.44	-7.26	-3.82	-3.46	-6.88
		6345	79	-6.58	-6.15	-3.35	-	-	-	-6.49	-6.39	-3.43	-3.46	-6.81
	UNII7	6665	143	-6.06	-7.10	-3.54	-	-	-	-6.77	-7.81	-4.25	-4.39	-7.93

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80L] 996T	UNII5	6025	15	-	-	-	-10.14	-9.96	-7.04	-	-	-	-3.46	-10.50
		6185	47	-	-	-	-9.40	-10.10	-6.72	-	-	-	-3.46	-10.19
		6345	79	-	-	-	-9.70	-9.24	-6.45	-	-	-	-3.46	-9.91
	UNII7	6665	143	-	-	-	-8.64	-9.81	-6.17	-	-	-	-4.39	-10.56

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 26T	UNII5	6025	15	4.78	5.27	8.04	3.73	4.17	6.97	5.76	5.76	8.77	-3.46	5.31
		6185	47	5.37	4.46	7.95	4.82	3.61	7.27	5.93	4.48	8.27	-3.46	4.81
		6345	79	4.99	5.25	8.13	3.87	4.05	6.97	4.80	5.17	8.00	-3.46	4.67
	UNII7	6665	143	5.23	4.36	7.83	4.10	3.05	6.62	4.56	3.83	7.22	-4.39	3.44

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 52T	UNII5	6025	15	2.04	2.07	5.07	2.53	2.40	5.48	3.12	2.90	6.02	-3.46	2.56
		6185	47	2.57	1.98	5.30	3.03	2.22	5.65	3.15	1.93	5.59	-3.46	2.19
		6345	79	2.43	3.09	5.78	2.00	2.81	5.44	2.07	2.47	5.28	-3.46	2.32
	UNII7	6665	143	2.59	1.68	5.17	2.46	1.60	5.06	2.23	1.19	4.75	-4.39	0.78

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional Gain	Maximum E.I.R.PSD
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 106T	UNII5	6025	15	-1.05	-0.86	2.06	-0.50	-0.63	2.45	-0.11	-0.07	2.92	-3.46	-0.54
		6185	47	-0.15	-1.01	2.46	0.09	-0.91	2.63	-0.13	-1.07	2.44	-3.46	-0.84
		6345	79	-0.82	-0.32	2.45	-0.94	-0.24	2.43	-0.85	-0.39	2.40	-3.46	-1.01
	UNII7	6665	143	-0.41	-1.52	2.08	-0.70	-1.59	1.89	-0.86	-1.90	1.66	-4.39	-2.31

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 242T	UNII5	6025	15	-3.87	-4.02	-0.93	-3.78	-3.78	-0.77	-3.12	-3.18	-0.14	-3.46	-3.60
		6185	47	-3.24	-4.06	-0.62	-2.98	-3.94	-0.42	-2.97	-4.10	-0.49	-3.46	-3.88
		6345	79	-4.22	-4.02	-1.11	-4.31	-4.06	-1.17	-4.38	-3.87	-1.11	-3.46	-4.57
	UNII7	6665	143	-3.92	-4.98	-1.41	-4.08	-4.92	-1.47	-4.23	-5.33	-1.73	-4.39	-5.80

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 484T	UNII5	6025	15	-6.88	-6.82	-3.84	-	-	-	-6.21	-6.39	-3.29	-3.46	-6.75
		6185	47	-6.04	-6.80	-3.40	-	-	-	-6.09	-6.91	-3.47	-3.46	-6.86
		6345	79	-7.18	-7.08	-4.12	-	-	-	-7.37	-6.62	-3.97	-3.46	-7.43
	UNII7	6665	143	-6.86	-7.99	-4.38	-	-	-	-7.07	-8.20	-4.58	-4.39	-8.77

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE80U] 996T	UNII5	6025	15	-	-	-	-9.16	-9.41	-6.27	-	-	-	-3.46	-9.73
		6185	47	-	-	-	-9.04	-10.08	-6.52	-	-	-	-3.46	-9.98
		6345	79	-	-	-	-10.35	-10.14	-7.23	-	-	-	-3.46	-10.69
	UNII7	6665	143	-	-	-	-9.32	-10.68	-6.93	-	-	-	-4.39	-11.32

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]								Directional Gain	Maximum E.I.R.PSD	
				RU Index : Low			RU Index : Mid			RU Index : High				
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	[dBi]	[dBm/MHz]
[HE160] 996*2T	UNII5	6025	15	-	-	-	-12.23	-12.09	-9.15	-	-	-	-3.46	-12.61
		6185	47	-	-	-	-11.71	-12.45	-9.05	-	-	-	-3.46	-12.51
		6345	79	-	-	-	-12.02	-11.30	-8.64	-	-	-	-3.46	-12.10
	UNII7	6665	143	-	-	-	-11.76	-12.73	-9.21	-	-	-	-4.39	-13.60

Mode	Band	Freq.[MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional	Maximum
				RU Index : Low			RU Index : Mid			RU Index : High			Gain	E.I.R.PSD
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		
[HE160] SU	UNII5	6025	15	-	-	-	-11.56	-11.96	-8.75	-	-	-	-3.46	-12.21
		6185	47	-	-	-	-11.29	-12.14	-8.68	-	-	-	-3.46	-12.15
		6345	79	-	-	-	-11.37	-11.06	-8.20	-	-	-	-3.46	-11.66
	UNII7	6665	143	-	-	-	-11.19	-12.41	-8.75	-	-	-	-4.39	-13.14

Mode	Band	Freq. [MHz]	CH.	MIMO Total Power Spectral Density [dBm/MHz]									Directional	Maximum
				RU Index : Low			RU Index : Mid			RU Index : High			Gain	E.I.R.PSD
				ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO		
802.11a	UNII5	5935	2	-	-	-	-1.86	-3.14	0.56	-	-	-	-3.46	-2.91
		6175	45	-	-	-	-1.98	-2.49	0.78	-	-	-	-3.46	-2.68
		6415	93	-	-	-	-2.03	-1.95	1.02	-	-	-	-3.46	-2.44
	UNII7	6535	117	-	-	-	-2.44	-2.98	0.31	-	-	-	-4.39	-4.08
		6695	149	-	-	-	-2.29	-3.18	0.30	-	-	-	-4.39	-4.09
		6855	181	-	-	-	-2.10	-3.21	0.39	-	-	-	-4.39	-4.00

## 10.6 In-Band Emission

-See Annex B Test Plot

### 10.7 Contention Based Protocol

- Contention-based Protocol Detection Value

Band	BW	Channel No.	Channel Freq (MHz)	injected Power [dBm]	Antenna Gain [dBi]	Adjusted Power [dBm]	EUT TX Status
UNII 5	HE20	37	6135	-74.44	-7.20	-67.24	Ceased
				-75.16	-7.20	-67.96	Minimal
				-75.77	-7.20	-68.57	Normal
	HE160	47	6110	-76.12	-7.20	-68.92	Ceased
				-77.05	-7.20	-69.85	Minimal
				-77.68	-7.20	-70.48	Normal
			6185	-71.22	-7.20	-64.02	Ceased
				-72.18	-7.20	-64.98	Minimal
				-72.75	-7.20	-65.55	Normal
	HE20	101	6250	-74.03	-7.20	-66.83	Ceased
				-75.06	-7.20	-67.86	Minimal
				-75.84	-7.20	-68.64	Normal
UNII 6	HE20	101	6455	-73.27	-6.80	-66.47	Ceased
				-74.31	-6.80	-67.51	Minimal
				-74.94	-6.80	-68.14	Normal
	HE160	111	6430	-76.30	-6.80	-69.50	Ceased
				-77.15	-6.80	-70.35	Minimal
				-77.77	-6.80	-70.97	Normal
			6505	-72.12	-6.80	-65.32	Ceased
				-73.05	-6.80	-66.25	Minimal
				-73.61	-6.80	-66.81	Normal
	HE20	133	6615	-74.53	-6.80	-67.73	Ceased
				-75.34	-6.80	-68.54	Minimal
				-75.94	-6.80	-69.14	Normal
UNII 7	HE20	133	6615	-72.62	-6.80	-65.82	Ceased
				-73.21	-6.80	-66.41	Minimal
				-74.18	-6.80	-67.38	Normal
	HE160	143	6590	-75.76	-6.80	-68.96	Ceased
				-76.53	-6.80	-69.73	Minimal
				-76.84	-6.80	-70.04	Normal
			6665	-74.05	-6.80	-67.25	Ceased
				-74.86	-6.80	-68.06	Minimal
				-75.23	-6.80	-68.43	Normal
	HE20	133	6740	-77.76	-7.40	-70.36	Ceased
				-78.58	-7.40	-71.18	Minimal
				-78.96	-7.40	-71.56	Normal

<b>Band</b>	<b>BW</b>	<b>Channel No.</b>	<b>Channel Freq (MHz)</b>	<b>injected Power [dBm]</b>	<b>Antenna Gain [dBi]</b>	<b>Adjusted Power [dBm]</b>	<b>EUT TX Status</b>
UNII 8	HE20	197	6935	-72.61	-7.40	-65.21	Ceased
				-77.21	-7.40	-66.17	Minimal
				-77.87	-7.40	-66.83	Normal
	HE160	207	6910	-76.34	-7.40	-68.94	Ceased
				-77.21	-7.40	-69.81	Minimal
				-77.87	-7.40	-70.47	Normal
			6985	-71.72	-8.50	-63.22	Ceased
				-72.64	-8.50	-64.14	Minimal
				-73.39	-8.50	-64.89	Normal
			7060	-75.30	-8.50	-66.80	Ceased
				-76.01	-8.50	-67.51	Minimal
				-76.86	-8.50	-68.36	Normal

**Note:**

1. KDB 987594 D02, contention based protocol was tested using an AWGN signal with a bandwidth of 10MHz.

The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.

2. Injected Power(dBm) = Actual power of AWGN injected into the antenna port(dBm) + Path Loss(dB)

3. Adjusted Power(dBm) = Injected Power(dBm) – Antenna Gain(dBi)

4. In order to simplify the report, attached were only the worst-case plots.

Plot & Antenna Gain is described in [UNII 6e] Plot Annex B. Please refer to [UNII 6e] Plot Annex B.

## - Incumbent Detection Result

Band	BW	Channel No.	Channel Freq (MHz)	Incumbent Freq (MHz)	Injected Power [dBm]	Antenna Gain [dBi]	Adjusted Power [dBm]	Detection Limit [dBm]	Margin [dB]
UNII 5	HE20	37	6135	6135	-74.44	-7.20	-67.24	-62.00	5.24
	HE160	47	6185	6110	-76.12	-7.20	-68.92	-62.00	6.92
				6185	-71.22	-7.20	-64.02	-62.00	2.02
				6250	-74.03	-7.20	-66.83	-62.00	4.83
UNII 6	HE20	101	6455	6455	-73.27	-6.80	-66.47	-62.00	4.47
	HE160	111	6505	6430	-76.30	-6.80	-69.50	-62.00	7.50
				6505	-72.12	-6.80	-65.32	-62.00	3.32
				6580	-74.53	-6.80	-67.73	-62.00	5.73
UNII 7	HE20	133	6615	6615	-72.62	-6.80	-65.82	-62.00	3.82
	HE160	143	6665	6590	-75.76	-6.80	-68.96	-62.00	6.96
				6665	-74.05	-6.80	-67.25	-62.00	5.25
				6740	-77.76	-7.40	-70.36	-62.00	8.36
UNII 8	HE20	197	6935	6935	-72.61	-7.40	-65.21	-62.00	3.21
	HE160	207	6985	6910	-76.34	-7.40	-68.94	-62.00	6.94
				6985	-71.72	-8.50	-63.22	-62.00	1.22
				7060	-75.30	-8.50	-66.80	-62.00	4.80

Note:

1. KDB 987594 D02, contention based protocol was tested using an AWGN signal with a bandwidth of 10MHz.

The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission, marker indicates the point at which the AWGN signal is introduced.

2. Injected Power(dBm) = Actual power of AWGN injected into the antenna port(dBm) + Path Loss(dB)

3. Adjusted Power(dBm) = Injected Power(dBm) – Antenna Gain(dBi)

4. In order to simplify the report, attached were only the worst-case plots.

Plot is described in [UNII 6e] Plot Annex B. Please refer to [UNII 6e] Plot Annex B.

## - Detection probability evaluation table Result

Band	BW	Channel No.	Center Frequency (MHz)	Incumbent Frequency (MHz)	Adjusted Power [dBm]	1	2	3	4	5	6	7	8	9	10	AWGN Detection Probability (%)	Limit Probability (%)
UNII 5	HE20	37	6135	6135	-67.24	o	o	o	o	o	o	o	o	o	o	100	90
				6110	-68.92	o	o	o	o	o	o	o	o	o	o	100	90
				6185	-64.02	o	o	o	o	o	o	o	o	o	o	100	90
				6250	-66.83	o	o	o	o	o	o	o	o	o	o	100	90
UNII 6	HE20	101	6455	6455	-66.47	o	o	o	o	o	o	o	o	o	o	100	90
				6430	-69.50	o	o	o	o	o	o	o	o	o	o	100	90
				6505	-65.32	o	o	o	o	o	o	o	o	o	o	100	90
				6580	-67.73	o	o	o	o	o	o	o	o	o	o	100	90
UNII 7	HE20	133	6615	6615	-65.82	o	o	o	o	o	o	o	o	o	o	100	90
				6590	-68.96	o	o	o	o	o	o	o	o	o	o	100	90
				6665	-67.25	o	o	o	o	o	o	o	o	o	o	100	90
				6740	-70.36	o	o	o	o	o	o	o	o	o	o	100	90
UNII 8	HE20	197	6935	6935	-65.21	o	o	o	o	o	o	o	o	o	o	100	90
				6910	-68.94	o	o	o	o	o	o	o	o	o	o	100	90
				6985	-63.22	o	o	o	o	o	o	o	o	o	o	100	90
				7060	-66.80	o	o	o	o	o	o	o	o	o	o	100	90

**10.8 RADIATED SPURIOUS EMISSIONS (9 kHz – 1 GHz)**
**Frequency Range : 9 kHz – 30 MHz**

Frequency	Measured Value	A.F+C.L-A.G+D.F	POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]
No Critical peaks found						

**Note:**

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor

**Frequency Range : Below 1 GHz**

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB $\mu$ V]	[dB/m]	[H/V]	[dB $\mu$ V/m]	[dB $\mu$ V/m]	[dB]
No Critical peaks found						

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

**10.9 RADIATED SPURIOUS EMISSIONS (Above 1 GHz)****1) 802.11a (MIMO)**

Band :	UNII 5
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	5935 MHz
Channel No.	2 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
11870	42.92	0.00	8.90	V	51.82	73.98	22.16	PK
11870	30.97	0.10	8.90	V	39.97	53.98	14.01	AV
17805	40.52	0.00	17.02	V	57.54	73.98	16.44	PK
17805	27.74	0.10	17.02	V	44.86	53.98	9.12	AV
11870	42.64	0.00	8.90	H	51.54	73.98	22.44	PK
11870	30.62	0.10	8.90	H	39.62	53.98	14.36	AV
17805	40.36	0.00	17.02	H	57.38	73.98	16.60	PK
17805	27.43	0.10	17.02	H	44.55	53.98	9.43	AV

Band :	UNII 5
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	6175 MHz
Channel No.	45 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12350	43.44	0.00	9.80	V	53.24	73.98	20.74	PK
12350	30.75	0.10	9.80	V	40.65	53.98	13.33	AV
18525	53.47	0.00	0.13	V	53.60	73.98	20.38	PK
18525	40.49	0.10	0.13	V	40.72	53.98	13.26	AV
12350	42.89	0.00	9.80	H	52.69	73.98	21.29	PK
12350	30.45	0.10	9.80	H	40.35	53.98	13.63	AV
18525	53.18	0.00	0.13	H	53.31	73.98	20.67	PK
18525	40.07	0.10	0.13	H	40.30	53.98	13.68	AV

Band : UNII 5  
 Operation Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 6415 MHz  
 Channel No. 93 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12830	42.83	0.00	11.42	V	54.25	68.23	13.98	PK
19245	50.51	0.00	2.38	V	52.89	73.98	21.09	PK
19245	38.52	0.10	2.38	V	41.00	53.98	12.98	AV
12830	42.53	0.00	11.42	H	53.95	68.23	14.28	PK
19245	50.19	0.00	2.38	H	52.57	73.98	21.41	PK
19245	38.26	0.10	2.38	H	40.74	53.98	13.24	AV

Band : UNII 6  
 Operation Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 6435 MHz  
 Channel No. 97 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12870	42.38	0.00	12.11	V	54.49	68.23	13.74	PK
19305	50.40	0.00	2.93	V	53.33	73.98	20.65	PK
19305	37.97	0.10	2.93	V	41.00	53.98	12.98	AV
12870	41.87	0.00	12.11	H	53.98	68.23	14.25	PK
19305	50.04	0.00	2.93	H	52.97	73.98	21.01	PK
19305	37.56	0.10	2.93	H	40.59	53.98	13.39	AV

Band :	UNII 6
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	6475 MHz
Channel No.	105 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12950	41.11	0.00	12.64	V	53.75	68.23	14.48	PK
19425	48.74	0.00	3.71	V	52.45	73.98	21.53	PK
19425	36.81	0.10	3.71	V	40.62	53.98	13.36	AV
12950	40.73	0.00	12.64	H	53.37	68.23	14.86	PK
19425	48.45	0.00	3.71	H	52.16	73.98	21.82	PK
19425	36.69	0.10	3.71	H	40.50	53.98	13.48	AV

Band :	UNII 6
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	6515 MHz
Channel No.	113 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13030	41.73	0.00	12.38	V	54.11	68.23	14.12	PK
19545	48.94	0.00	4.30	V	53.24	73.98	20.74	PK
19545	36.47	0.10	4.30	V	40.87	53.98	13.11	AV
13030	41.55	0.00	12.38	H	53.93	68.23	14.30	PK
19545	48.63	0.00	4.30	H	52.93	73.98	21.05	PK
19545	36.12	0.10	4.30	H	40.52	53.98	13.46	AV

Band : UNII 7  
 Operation Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 6535 MHz  
 Channel No. 117 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13070	42.21	0.00	12.58	V	54.79	68.23	13.44	PK
19605	50.43	0.00	4.64	V	55.07	73.98	18.91	PK
19605	37.98	0.10	4.64	V	41.09	53.98	12.89	AV
13070	40.87	0.00	12.58	H	53.45	68.23	14.78	PK
19605	50.16	0.00	4.64	H	54.80	73.98	19.18	PK
19605	37.52	0.10	4.64	H	42.26	53.98	11.72	AV

Band : UNII 7  
 Operation Mode: 802.11a  
 Transfer Rate: 6 Mbps  
 Operating Frequency 6695 MHz  
 Channel No. 149 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13390	41.32	0.00	12.97	V	54.29	73.98	19.69	PK
13390	28.82	0.10	12.97	V	41.89	53.98	12.09	AV
20085	45.87	0.00	6.58	V	52.45	73.98	21.53	PK
20085	33.64	0.10	6.58	V	40.32	53.98	13.66	AV
13390	40.93	0.00	12.97	H	53.90	73.98	20.08	PK
13390	28.56	0.10	12.97	H	41.63	53.98	12.35	AV
20085	45.54	0.00	6.58	H	52.12	73.98	21.86	PK
20085	33.27	0.10	6.58	H	39.95	53.98	14.03	AV

Band :	UNII 7
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	6855 MHz
Channel No.	181 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13710	41.55	0.00	13.19	V	54.74	68.23	13.49	PK
20565	45.60	0.00	7.20	V	52.80	73.98	21.18	PK
20565	33.50	0.10	7.20	V	40.80	53.98	13.18	AV
13710	41.21	0.00	13.19	H	54.40	68.23	13.83	PK
20565	45.24	0.00	7.20	H	52.44	73.98	21.54	PK
20565	33.09	0.10	7.20	H	40.39	53.98	13.59	AV

Band :	UNII 8
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	6875 MHz
Channel No.	185 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13750	41.36	0.00	13.38	V	54.74	68.23	13.49	PK
20625	45.84	0.00	7.01	V	52.85	73.98	21.13	PK
20625	33.52	0.10	7.01	V	40.63	53.98	13.35	AV
13750	40.99	0.00	13.38	H	54.37	68.23	13.86	PK
20625	45.57	0.00	7.01	H	52.58	73.98	21.40	PK
20625	33.24	0.10	7.01	H	40.35	53.98	13.63	AV

Band :	UNII 8
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	6995 MHz
Channel No.	209 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13990	41.10	0.00	12.78	V	53.88	68.23	14.35	PK
20985	46.56	0.00	6.88	V	53.44	73.98	20.54	PK
20985	34.06	0.10	6.88	V	41.04	53.98	12.94	AV
13990	40.65	0.00	12.78	H	53.43	68.23	14.80	PK
20985	46.20	0.00	6.88	H	53.08	73.98	20.90	PK
20985	33.63	0.10	6.88	H	40.61	53.98	13.37	AV

Band :	UNII 8
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	7115 MHz
Channel No.	233 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
14230	40.67	0.00	13.74	V	54.41	68.23	13.82	PK
21345	47.63	0.00	5.75	V	53.38	73.98	20.60	PK
21345	34.56	0.10	5.75	V	40.41	53.98	13.57	AV
14230	40.21	0.00	13.74	H	53.95	68.23	14.28	PK
21345	48.02	0.00	5.75	H	53.77	73.98	20.21	PK
21345	34.87	0.10	5.75	H	40.72	53.98	13.26	AV

**2) 802.11ax(HE20)SU (MIMO)**

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	MCS0
Operating Frequency	5935 MHz
Channel No.	2 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
11870	42.66	0.00	8.90	V	51.56	73.98	22.42	PK
11870	30.98	0.00	8.90	V	39.88	53.98	14.10	AV
17805	40.56	0.00	17.02	V	57.58	73.98	16.40	PK
17805	27.92	0.00	17.02	V	44.94	53.98	9.04	AV
11870	42.54	0.00	8.90	H	51.44	73.98	22.54	PK
11870	30.78	0.00	8.90	H	39.68	53.98	14.30	AV
17805	40.35	0.00	17.02	H	57.37	73.98	16.61	PK
17805	27.88	0.00	17.02	H	44.90	53.98	9.08	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	MCS0
Operating Frequency	6175 MHz
Channel No.	45 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12350	43.51	0.00	9.80	V	53.31	73.98	20.67	PK
12350	30.85	0.00	9.80	V	40.65	53.98	13.33	AV
18525	53.30	0.00	0.13	V	53.43	73.98	20.55	PK
18525	40.59	0.00	0.13	V	40.72	53.98	13.26	AV
12350	43.41	0.00	9.80	H	53.21	73.98	20.77	PK
12350	30.79	0.00	9.80	H	40.59	53.98	13.39	AV
18525	53.01	0.00	0.13	H	53.14	73.98	20.84	PK
18525	40.42	0.00	0.13	H	40.55	53.98	13.43	AV

Band : UNII 5  
 Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: MCS0  
 Operating Frequency 6415 MHz  
 Channel No. 93 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12830	42.75	0.00	11.42	V	54.17	68.23	14.06	PK
19245	50.73	0.00	2.38	V	53.11	73.98	20.87	PK
19245	38.39	0.00	2.38	V	40.77	53.98	13.21	AV
12830	42.52	0.00	11.42	H	53.94	68.23	14.29	PK
19245	50.45	0.00	2.38	H	52.83	73.98	21.15	PK
19245	38.13	0.00	2.38	H	40.51	53.98	13.47	AV

Band : UNII 6  
 Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: MCS0  
 Operating Frequency 6435 MHz  
 Channel No. 97 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L.- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12870	42.17	0.00	12.11	V	54.28	68.23	13.95	PK
19305	50.36	0.00	2.93	V	53.29	73.98	20.69	PK
19305	37.96	0.00	2.93	V	40.89	53.98	13.09	AV
12870	42.15	0.00	12.11	H	54.26	68.23	13.97	PK
19305	50.12	0.00	2.93	H	53.05	73.98	20.93	PK
19305	37.78	0.00	2.93	H	40.71	53.98	13.27	AV

Band :	UNII 6
Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	MCS0
Operating Frequency	6475 MHz
Channel No.	105 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12950	41.22	0.00	12.64	V	53.86	68.23	14.37	PK
19425	48.60	0.00	3.71	V	52.31	73.98	21.67	PK
19425	36.78	0.00	3.71	V	40.49	53.98	13.49	AV
12950	41.11	0.00	12.64	H	53.75	68.23	14.48	PK
19425	48.45	0.00	3.71	H	52.16	73.98	21.82	PK
19425	36.59	0.00	3.71	H	40.30	53.98	13.68	AV

Band :	UNII 6
Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	MCS0
Operating Frequency	6515 MHz
Channel No.	113 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13030	41.67	0.00	12.38	V	54.05	68.23	14.18	PK
19545	48.76	0.00	4.30	V	53.06	73.98	20.92	PK
19545	36.33	0.00	4.30	V	40.63	53.98	13.35	AV
13030	41.59	0.00	12.38	H	53.97	68.23	14.26	PK
19545	48.54	0.00	4.30	H	52.84	73.98	21.14	PK
19545	36.12	0.00	4.30	H	40.42	53.98	13.56	AV

Band : UNII 7

Operation Mode: 802.11ax(HE20)

Transfer MCS Index: MCS0

Operating Frequency 6535 MHz

Channel No. 117 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor	A.F+C.L-A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13070	42.46	0.00	12.58	V	55.04	68.23	13.19	PK
19605	48.12	0.00	4.64	V	52.76	73.98	21.22	PK
19605	36.07	0.00	4.64	V	41.09	53.98	12.89	AV
13070	42.23	0.00	12.58	H	54.81	68.23	13.42	PK
19605	47.95	0.00	4.64	H	52.59	73.98	21.39	PK
19605	35.86	0.00	4.64	H	40.50	53.98	13.48	AV

Band : UNII 7

Operation Mode: 802.11ax(HE20)

Transfer MCS Index: MCS0

Operating Frequency 6695 MHz

Channel No. 149 Ch

Frequency [MHz]	Measured Value [dBμV]	Duty Cycle Factor	A.F+C.L-A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
13390	41.55	0.00	12.97	V	54.52	73.98	19.46	PK
13390	28.76	0.00	12.97	V	41.73	53.98	12.25	AV
20085	45.76	0.00	6.58	V	52.34	73.98	21.64	PK
20085	33.52	0.00	6.58	V	40.10	53.98	13.88	AV
13390	41.34	0.00	12.97	H	54.31	73.98	19.67	PK
13390	28.58	0.00	12.97	H	41.55	53.98	12.43	AV
20085	45.45	0.00	6.58	H	52.03	73.98	21.95	PK
20085	33.32	0.00	6.58	H	39.90	53.98	14.08	AV

Band :	UNII 7
Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	MCS0
Operating Frequency	6855 MHz
Channel No.	181 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13710	41.63	0.00	13.19	V	54.82	68.23	13.41	PK
20565	45.53	0.00	7.20	V	52.73	73.98	21.25	PK
20565	33.34	0.00	7.20	V	40.54	53.98	13.44	AV
13710	41.36	0.00	13.19	H	54.55	68.23	13.68	PK
20565	45.22	0.00	7.20	H	52.42	73.98	21.56	PK
20565	33.12	0.00	7.20	H	40.32	53.98	13.66	AV

Band :	UNII 8
Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	MCS0
Operating Frequency	6875 MHz
Channel No.	185 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13750	41.11	0.00	13.38	V	54.49	68.23	13.74	PK
20625	45.96	0.00	7.01	V	52.97	73.98	21.01	PK
20625	33.59	0.00	7.01	V	40.60	53.98	13.38	AV
13750	40.80	0.00	13.38	H	54.18	68.23	14.05	PK
20625	45.72	0.00	7.01	H	52.73	73.98	21.25	PK
20625	33.38	0.00	7.01	H	40.39	53.98	13.59	AV

Band : UNII 8

Operation Mode: 802.11ax(HE20)

Transfer MCS Index: MCS0

Operating Frequency 6995 MHz

Channel No. 209 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L-A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
13990	41.05	0.00	12.78	V	53.83	68.23	14.40	PK
20985	46.84	0.00	6.88	V	53.72	73.98	20.26	PK
20985	34.15	0.00	6.88	V	41.03	53.98	12.95	AV
13990	40.79	0.00	12.78	H	53.57	68.23	14.66	PK
20985	46.67	0.00	6.88	H	53.55	73.98	20.43	PK
20985	33.84	0.00	6.88	H	40.72	53.98	13.26	AV

Band : UNII 8

Operation Mode: 802.11ax(HE20)

Transfer MCS Index: MCS0

Operating Frequency 7115 MHz

Channel No. 233 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L-A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
14230	40.78	0.00	13.74	V	54.52	68.23	13.71	PK
21345	47.47	0.00	5.75	V	53.22	73.98	20.76	PK
21345	34.78	0.00	5.75	V	40.53	53.98	13.45	AV
14230	40.56	0.00	13.74	H	54.30	68.23	13.93	PK
21345	47.61	0.00	5.75	H	53.36	73.98	20.62	PK
21345	34.90	0.00	5.75	H	40.65	53.98	13.33	AV

## 3) 802.11ax(HE40) SU (MIMO)

Band :	UNII 5
Operation Mode:	802.11ax(HE40)
Transfer MCS Index:	MCS0
Operating Frequency	5965 MHz
Channel No.	3 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
11930	43.67	0.00	8.70	V	52.37	73.98	21.61	PK
11930	30.95	0.00	8.70	V	39.65	53.98	14.33	AV
17895	40.31	0.00	17.16	V	57.47	73.98	16.51	PK
17895	28.25	0.00	17.16	V	45.41	53.98	8.57	AV
11930	43.34	0.00	8.70	H	52.04	73.98	21.94	PK
11930	30.72	0.00	8.70	H	39.42	53.98	14.56	AV
17895	40.15	0.00	17.16	H	57.31	73.98	16.67	PK
17895	28.06	0.00	17.16	H	45.22	53.98	8.76	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE40)
Transfer MCS Index:	MCS0
Operating Frequency	6165 MHz
Channel No.	43 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12330	43.11	0.00	9.96	V	53.07	73.98	20.91	PK
12330	30.59	0.00	9.96	V	40.55	53.98	13.43	AV
18495	52.53	0.00	0.46	V	52.99	73.98	20.99	PK
18495	39.99	0.00	0.46	V	40.45	53.98	13.53	AV
12330	42.95	0.00	9.96	H	52.91	73.98	21.07	PK
12330	30.33	0.00	9.96	H	40.29	53.98	13.69	AV
18495	52.23	0.00	0.46	H	52.69	73.98	21.29	PK
18495	39.72	0.00	0.46	H	40.18	53.98	13.80	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE40)
Transfer MCS Index:	MCS0
Operating Frequency	6405 MHz
Channel No.	91 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12810	42.43	0.00	11.24	V	53.67	68.23	14.56	PK
19215	50.89	0.00	2.17	V	53.06	73.98	20.92	PK
19215	38.47	0.00	2.17	V	40.64	53.98	13.34	AV
12810	42.21	0.00	11.24	H	53.45	68.23	14.78	PK
19215	50.67	0.00	2.17	H	52.84	73.98	21.14	PK
19215	38.19	0.00	2.17	H	40.36	53.98	13.62	AV

**4) 802.11ax(HE80) SU (MIMO)**

Band :	UNII 5
Operation Mode:	802.11ax(HE80)
Transfer MCS Index:	MCS0
Operating Frequency	5985 MHz
Channel No.	7 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
11970	42.90	0.00	8.95	V	51.85	73.98	22.13	PK
11970	30.75	0.00	8.95	V	39.70	53.98	14.28	AV
17955	40.65	0.00	17.90	V	58.55	73.98	15.43	PK
17955	28.19	0.00	17.90	V	46.09	53.98	7.89	AV
11970	42.72	0.00	8.95	H	51.67	73.98	22.31	PK
11970	30.56	0.00	8.95	H	39.51	53.98	14.47	AV
17955	40.33	0.00	17.90	H	58.23	73.98	15.75	PK
17955	28.04	0.00	17.90	H	45.94	53.98	8.04	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE80)
Transfer MCS Index:	MCS0
Operating Frequency	6145 MHz
Channel No.	39 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12290	43.40	0.00	9.85	V	53.25	73.98	20.73	PK
12290	30.85	0.00	9.85	V	40.70	53.98	13.28	AV
18435	52.07	0.00	0.76	V	52.83	73.98	21.15	PK
18435	39.70	0.00	0.76	V	40.46	53.98	13.52	AV
12290	30.67	0.00	9.85	H	40.52	73.98	33.46	PK
12290	30.67	0.00	9.85	H	40.52	53.98	13.46	AV
18435	51.83	0.00	0.76	H	52.59	73.98	21.39	PK
18435	39.56	0.00	0.76	H	40.32	53.98	13.66	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE80)
Transfer MCS Index:	MCS0
Operating Frequency	6385 MHz
Channel No.	87 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12770	41.71	0.00	11.08	V	52.79	68.23	15.44	PK
19155	50.59	0.00	1.35	V	51.94	73.98	22.04	PK
19155	38.72	0.00	1.35	V	40.07	53.98	13.91	AV
12770	41.54	0.00	11.08	H	52.62	68.23	15.61	PK
19155	50.35	0.00	1.35	H	51.70	73.98	22.28	PK
19155	38.50	0.00	1.35	H	39.85	53.98	14.13	AV

## 5) 802.11ax(HE160) SU (MIMO)

Band :	UNII 5
Operation Mode:	802.11ax(HE160)
Transfer MCS Index:	MCS0
Operating Frequency	6025 MHz
Channel No.	15 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L-A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12050	42.94	0.00	9.32	V	52.26	73.98	21.72	PK
12050	30.59	0.00	9.32	V	39.91	53.98	14.07	AV
18075	49.78	0.00	2.21	V	51.99	73.98	21.99	PK
18075	37.80	0.00	2.21	V	40.01	53.98	13.97	AV
12050	42.77	0.00	9.32	H	52.09	73.98	21.89	PK
12050	30.35	0.00	9.32	H	39.67	53.98	14.31	AV
18075	49.54	0.00	2.21	H	51.75	73.98	22.23	PK
18075	37.67	0.00	2.21	H	39.88	53.98	14.10	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE160)
Transfer MCS Index:	MCS0
Operating Frequency	6185 MHz
Channel No.	47 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L-A.G+D.F [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12370	42.53	0.00	9.95	V	52.48	73.98	21.50	PK
12370	30.82	0.00	9.95	V	40.77	53.98	13.21	AV
18555	52.59	0.00	-0.25	V	52.34	73.98	21.64	PK
18555	40.53	0.00	-0.25	V	40.28	53.98	13.70	AV
12370	42.25	0.00	9.95	H	52.20	73.98	21.78	PK
12370	30.63	0.00	9.95	H	40.58	53.98	13.40	AV
18555	52.34	0.00	-0.25	H	52.09	73.98	21.89	PK
18555	40.37	0.00	-0.25	H	40.12	53.98	13.86	AV

Band :	UNII 5
Operation Mode:	802.11ax(HE160)
Transfer MCS Index:	MCS0
Operating Frequency	6345 MHz
Channel No.	79 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
12690	42.43	0.00	10.31	V	52.74	73.98	21.24	PK
12690	30.45	0.00	10.31	V	40.76	53.98	13.22	AV
19035	51.72	0.00	0.50	V	52.22	73.98	21.76	PK
19035	39.49	0.00	0.50	V	39.99	53.98	13.99	AV
12690	42.24	0.00	10.31	H	52.55	73.98	21.43	PK
12690	30.28	0.00	10.31	H	40.59	53.98	13.39	AV
19035	51.56	0.00	0.50	H	52.06	73.98	21.92	PK
19035	39.28	0.00	0.50	H	39.78	53.98	14.20	AV

**Note:**

All Modes of operation were investigated and the worst case configuration results are reported.  
In order to simplify the report, We only have attached RSE result of worst case.

**[RSDB]**
**Scenario 1**
**WLAN 2.4 GHz MIMO(802.11b Ch.1) + WLAN 6 GHz MIMO(802.11ax(HE80) SU Ch.7)**

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L- A.G+D.F [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
11970	42.66	0.00	8.95	V	51.61	73.98	22.37	PK
11970	31.08	0.00	8.95	V	40.03	53.98	13.95	AV
17955	40.59	0.00	17.90	V	58.49	73.98	15.49	PK
17955	27.99	0.00	17.90	V	45.89	53.98	8.09	AV
11970	42.51	0.00	8.95	H	51.46	73.98	22.52	PK
11970	30.98	0.00	8.95	H	39.93	53.98	14.05	AV
17955	40.65	0.00	17.90	H	58.55	73.98	15.43	PK
17955	28.00	0.00	17.90	H	45.90	53.98	8.08	AV


**Note :**

1. DTS RSDB Data refer to [DTS] Test Report.


**Test Plots**

**[MIMO]**


Average result (802.11a, Ch.2 3rd Harmonic, Y-V)

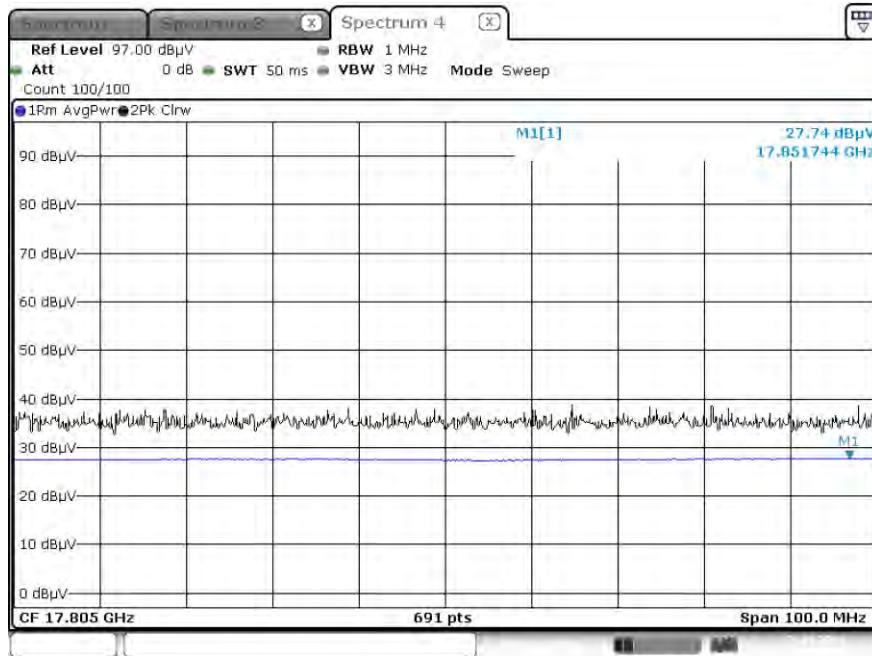


Peak result (802.11a, Ch.2 3rd Harmonic, Y-V)

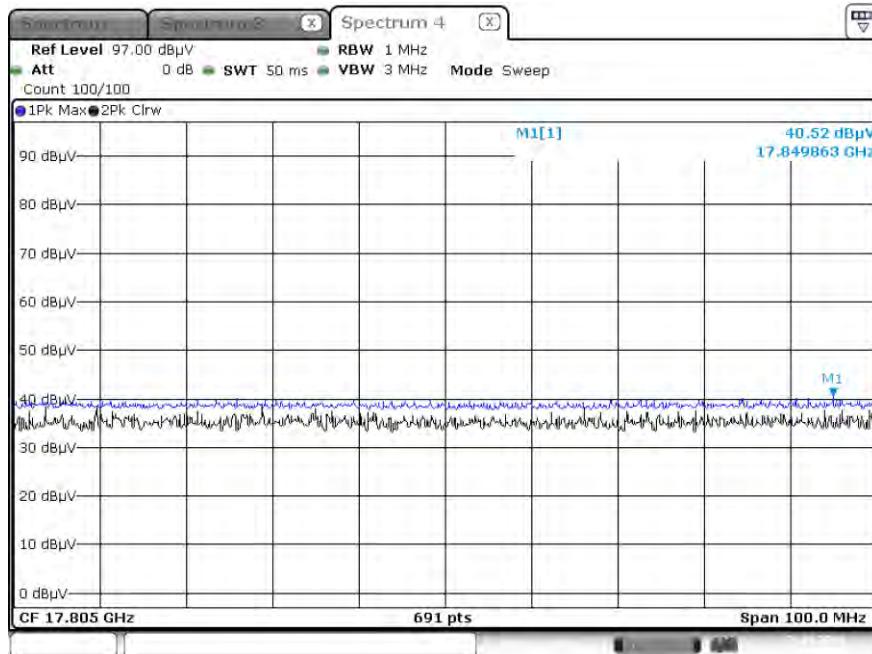

Average result (802.11ax(HE80)\_SU, Ch.7 3rd Harmonic, Y-V)

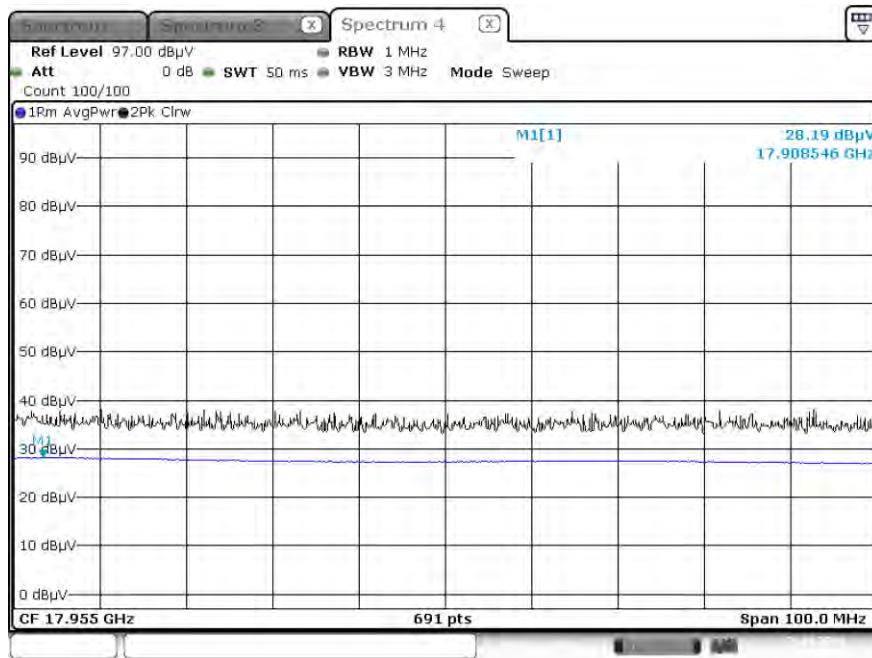

Peak result (802.11ax(HE80)\_SU, Ch.7 3rd Harmonic, Y-V)

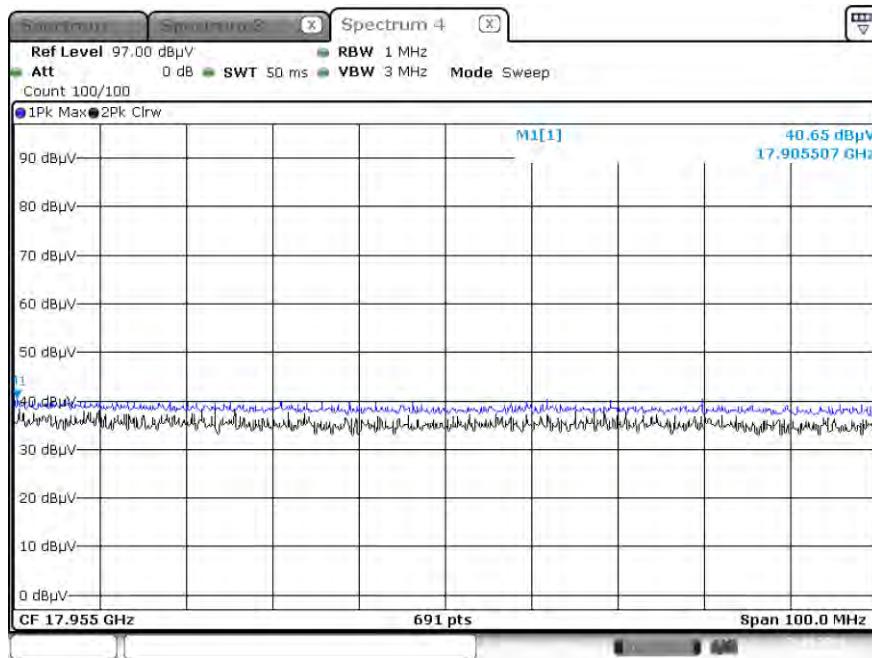

**Note:**


Only the worst case plots for Radiated Spurious Emissions.

[RSDB]


**Scenario 1**

**WLAN 2.4 GHz MIMO(802.11b Ch.1) + WLAN 6 GHz MIMO(802.11ax(HE80) SU Ch.7 )**

Average result (3rd Harmonic, X-H)

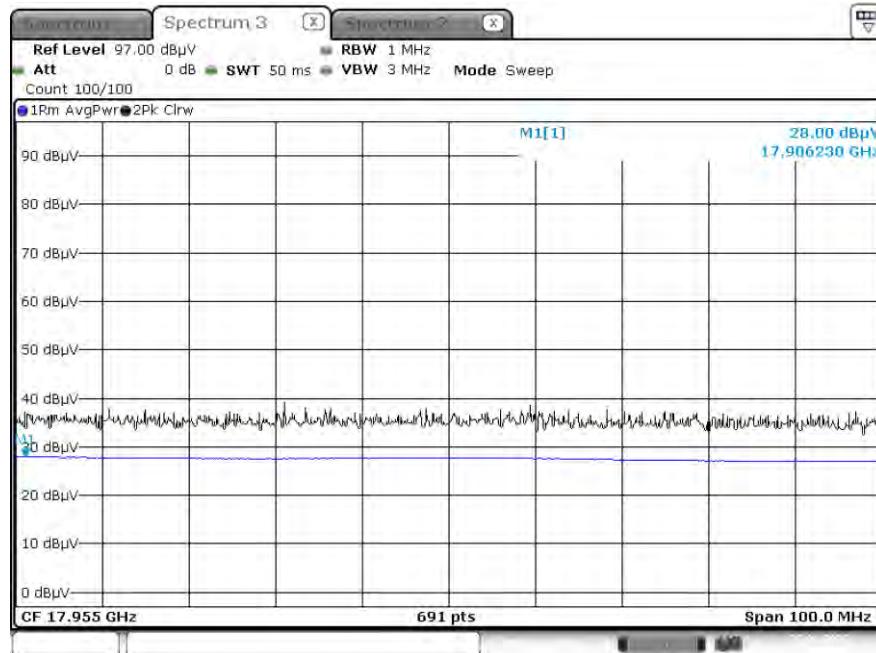

Peak result (3rd Harmonic, X-H)

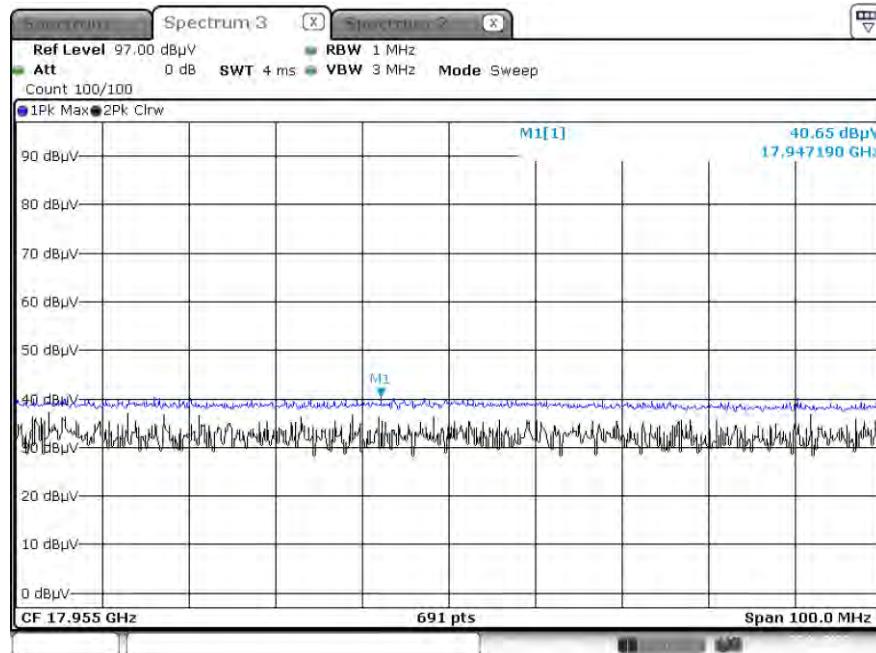

**Note:**

Only the worst case plots for Radiated Spurious Emissions.

**10.10 RADIATED RESTRICTED BAND EDGE**
**[MIMO]**
**1) 802.11a**

Band :	UNII 5
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	5935 MHz
Channel No.	2 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#5924.5	62.64	0.00	8.87	H	71.51	88.23	16.72	PK
#5924.5	54.03	0.10	8.87	H	63.00	68.23	5.23	AV
#5923.5	57.85	0.00	8.87	H	66.72	88.23	21.51	PK
#5923.5	48.74	0.10	8.87	H	57.71	68.23	10.52	AV
5460 - 5923	63.58	0.00	8.87	H	72.45	88.23	15.78	PK
5460 - 5923	47.71	0.10	8.87	H	56.68	68.23	11.55	AV
5350 - 5460	41.86	0.00	7.99	H	49.85	73.98	24.13	PK
5350 - 5460	28.75	0.10	7.99	H	36.84	53.98	17.14	AV
#5924.5	61.83	0.00	8.87	V	70.70	88.23	17.53	PK
#5924.5	53.21	0.10	8.87	V	62.18	68.23	6.05	AV
#5923.5	57.28	0.00	8.87	V	66.15	88.23	22.08	PK
#5923.5	48.35	0.10	8.87	V	57.32	68.23	10.91	AV
5460 - 5923	62.72	0.00	8.87	V	71.59	88.23	16.64	PK
5460 - 5923	47.09	0.10	8.87	V	56.06	68.23	12.17	AV
5350 - 5460	41.24	0.00	7.99	V	49.23	73.98	24.75	PK
5350 - 5460	28.11	0.10	7.99	V	36.20	53.98	17.78	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 8
Operation Mode:	802.11a
Transfer Rate:	6 Mbps
Operating Frequency	7115 MHz
Channel No.	233 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#7125.5	53.12	0.00	13.82	H	66.94	88.23	21.29	PK
#7125.5	43.67	0.10	13.82	H	57.59	68.23	10.64	AV
#7126.5	48.32	0.00	13.82	H	62.14	88.23	26.09	PK
#7126.5	38.42	0.10	13.82	H	52.34	68.23	15.89	AV
7127 - 7250	51.33	0.00	14.19	H	65.52	88.23	22.71	PK
7127 - 7250	36.85	0.10	14.19	H	51.14	68.23	17.09	AV
7250 - 7750	38.38	0.00	14.74	H	53.12	73.98	20.86	PK
7250 - 7750	26.82	0.10	14.74	H	41.66	53.98	12.32	AV
#7125.5	52.87	0.00	13.82	V	66.69	88.23	21.54	PK
#7125.5	43.29	0.10	13.82	V	57.21	68.23	11.02	AV
#7126.5	47.96	0.00	13.82	V	61.78	88.23	26.45	PK
#7126.5	38.15	0.10	13.82	V	52.07	68.23	16.16	AV
7127 - 7250	50.84	0.00	14.19	V	65.03	88.23	23.20	PK
7127 - 7250	36.53	0.10	14.19	V	50.82	68.23	17.41	AV
7250 - 7750	38.02	0.00	14.74	V	52.76	73.98	21.22	PK
7250 - 7750	26.66	0.10	14.74	V	41.50	53.98	12.48	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

## 2) 802.11ax(HE20) 26 Tone

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	5935 MHz
Channel No.	2 Ch
RU Offset	0

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#5924.5	67.79	0.00	8.87	H	76.66	88.23	11.57	PK
#5924.5	55.87	0.00	8.87	H	64.74	68.23	3.49	AV
#5923.5	60.10	0.00	8.87	H	68.97	88.23	19.26	PK
#5923.5	48.28	0.00	8.87	H	57.15	68.23	11.08	AV
5460 - 5923	68.64	0.00	8.87	H	77.51	88.23	10.72	PK
5460 - 5923	46.82	0.00	8.87	H	55.69	68.23	12.54	AV
5350 - 5460	42.81	0.00	7.99	H	50.80	73.98	23.18	PK
5350 - 5460	28.52	0.00	7.99	H	36.51	53.98	17.47	AV
#5924.5	67.25	0.00	8.87	V	76.12	88.23	12.11	PK
#5924.5	55.13	0.00	8.87	V	64.00	68.23	4.23	AV
#5923.5	59.36	0.00	8.87	V	68.23	88.23	20.00	PK
#5923.5	47.52	0.00	8.87	V	56.39	68.23	11.84	AV
5460 - 5923	68.06	0.00	8.87	V	76.93	88.23	11.30	PK
5460 - 5923	46.37	0.00	8.87	V	55.24	68.23	12.99	AV
5350 - 5460	42.28	0.00	7.99	V	50.27	73.98	23.71	PK
5350 - 5460	27.96	0.00	7.99	V	35.95	53.98	18.03	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 8
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	7115 MHz
Channel No.	233 Ch
RU Offset	8

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#7125.5	61.95	0.00	13.82	H	75.77	88.23	12.46	PK
#7125.5	49.11	0.00	13.82	H	62.93	68.23	5.30	AV
#7126.5	55.33	0.00	13.82	H	69.15	88.23	19.08	PK
#7126.5	42.18	0.00	13.82	H	56.00	68.23	12.23	AV
7127 - 7250	63.34	0.00	14.19	H	77.53	88.23	10.70	PK
7127 - 7250	40.55	0.00	14.19	H	54.74	68.23	13.49	AV
7250 - 7750	38.52	0.00	14.74	H	53.26	73.98	20.72	PK
7250 - 7750	26.85	0.00	14.74	H	41.59	53.98	12.39	AV
#7125.5	61.56	0.00	13.82	V	75.38	88.23	12.85	PK
#7125.5	48.78	0.00	13.82	V	62.60	68.23	5.63	AV
#7126.5	54.97	0.00	13.82	V	68.79	88.23	19.44	PK
#7126.5	41.82	0.00	13.82	V	55.64	68.23	12.59	AV
7127 - 7250	62.75	0.00	14.19	V	76.94	88.23	11.29	PK
7127 - 7250	40.06	0.00	14.19	V	54.25	68.23	13.98	AV
7250 - 7750	38.14	0.00	14.74	V	52.88	73.98	21.10	PK
7250 - 7750	26.53	0.00	14.74	V	41.27	53.98	12.71	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

**3) 802.11ax(HE20) 52 Tone**

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	5935 MHz
Channel No.	2 Ch
RU Offset	37

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#5924.5	68.65	0.00	8.87	H	77.52	88.23	10.71	PK
#5924.5	55.84	0.00	8.87	H	64.71	68.23	3.52	AV
#5923.5	61.96	0.00	8.87	H	70.83	88.23	17.40	PK
#5923.5	48.67	0.00	8.87	H	57.54	68.23	10.69	AV
5460 - 5923	70.96	0.00	8.87	H	79.83	88.23	8.40	PK
5460 - 5923	46.73	0.00	8.87	H	55.60	68.23	12.63	AV
5350 - 5460	42.36	0.00	7.99	H	50.35	73.98	23.63	PK
5350 - 5460	28.58	0.00	7.99	H	36.57	53.98	17.41	AV
#5924.5	67.96	0.00	8.87	V	76.83	88.23	11.40	PK
#5924.5	55.12	0.00	8.87	V	63.99	68.23	4.24	AV
#5923.5	61.35	0.00	8.87	V	70.22	88.23	18.01	PK
#5923.5	47.88	0.00	8.87	V	56.75	68.23	11.48	AV
5460 - 5923	70.24	0.00	8.87	V	79.11	88.23	9.12	PK
5460 - 5923	46.03	0.00	8.87	V	54.90	68.23	13.33	AV
5350 - 5460	41.67	0.00	7.99	V	49.66	73.98	24.32	PK
5350 - 5460	27.76	0.00	7.99	V	35.75	53.98	18.23	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 8
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	7115 MHz
Channel No.	233 Ch
RU Offset	40

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#7125.5	61.88	0.00	13.82	H	75.70	88.23	12.53	PK
#7125.5	48.35	0.00	13.82	H	62.17	68.23	6.06	AV
#7126.5	55.62	0.00	13.82	H	69.44	88.23	18.79	PK
#7126.5	42.29	0.00	13.82	H	56.11	68.23	12.12	AV
7127 - 7250	62.58	0.00	14.19	H	76.77	88.23	11.46	PK
7127 - 7250	40.65	0.00	14.19	H	54.84	68.23	13.39	AV
7250 - 7750	38.19	0.00	14.74	H	52.93	73.98	21.05	PK
7250 - 7750	26.95	0.00	14.74	H	41.69	53.98	12.29	AV
#7125.5	61.58	0.00	13.82	V	75.40	88.23	12.83	PK
#7125.5	48.06	0.00	13.82	V	61.88	68.23	6.35	AV
#7126.5	55.24	0.00	13.82	V	69.06	88.23	19.17	PK
#7126.5	41.96	0.00	13.82	V	55.78	68.23	12.45	AV
7127 - 7250	62.25	0.00	14.19	V	76.44	88.23	11.79	PK
7127 - 7250	40.19	0.00	14.19	V	54.38	68.23	13.85	AV
7250 - 7750	37.81	0.00	14.74	V	52.55	73.98	21.43	PK
7250 - 7750	26.63	0.00	14.74	V	41.37	53.98	12.61	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

## 4) 802.11ax(HE20) 106 Tone

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	5935 MHz
Channel No.	2 Ch
RU Offset	53

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#5924.5	69.72	0.00	8.87	H	78.59	88.23	9.64	PK
#5924.5	55.95	0.00	8.87	H	64.82	68.23	3.41	AV
#5923.5	62.05	0.00	8.87	H	70.92	88.23	17.31	PK
#5923.5	48.59	0.00	8.87	H	57.46	68.23	10.77	AV
5460 - 5923	70.49	0.00	8.87	H	79.36	88.23	8.87	PK
5460 - 5923	46.98	0.00	8.87	H	55.85	68.23	12.38	AV
5350 - 5460	42.05	0.00	7.99	H	50.04	73.98	23.94	PK
5350 - 5460	28.64	0.00	7.99	H	36.63	53.98	17.35	AV
#5924.5	68.96	0.00	8.87	V	77.83	88.23	10.40	PK
#5924.5	55.16	0.00	8.87	V	64.03	68.23	4.20	AV
#5923.5	61.23	0.00	8.87	V	70.10	88.23	18.13	PK
#5923.5	47.77	0.00	8.87	V	56.64	68.23	11.59	AV
5460 - 5923	69.62	0.00	8.87	V	78.49	88.23	9.74	PK
5460 - 5923	46.25	0.00	8.87	V	55.12	68.23	13.11	AV
5350 - 5460	41.38	0.00	7.99	V	49.37	73.98	24.61	PK
5350 - 5460	27.82	0.00	7.99	V	35.81	53.98	18.17	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 8
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	7115 MHz
Channel No.	233 Ch
RU Offset	54

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#7125.5	62.78	0.00	13.82	H	76.60	88.23	11.63	PK
#7125.5	49.76	0.00	13.82	H	63.58	68.23	4.65	AV
#7126.5	56.33	0.00	13.82	H	70.15	88.23	18.08	PK
#7126.5	43.22	0.00	13.82	H	57.04	68.23	11.19	AV
7127 - 7250	63.89	0.00	14.19	H	78.08	88.23	10.15	PK
7127 - 7250	41.85	0.00	14.19	H	56.04	68.23	12.19	AV
7250 - 7750	38.22	0.00	14.74	H	52.96	73.98	21.02	PK
7250 - 7750	26.81	0.00	14.74	H	41.55	53.98	12.43	AV
#7125.5	62.39	0.00	13.82	V	76.21	88.23	12.02	PK
#7125.5	49.44	0.00	13.82	V	63.26	68.23	4.97	AV
#7126.5	56.06	0.00	13.82	V	69.88	88.23	18.35	PK
#7126.5	42.87	0.00	13.82	V	56.69	68.23	11.54	AV
7127 - 7250	63.62	0.00	14.19	V	77.81	88.23	10.42	PK
7127 - 7250	41.53	0.00	14.19	V	55.72	68.23	12.51	AV
7250 - 7750	37.96	0.00	14.74	V	52.70	73.98	21.28	PK
7250 - 7750	26.58	0.00	14.74	V	41.32	53.98	12.66	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

**5) 802.11ax(HE20) 242 Tone**

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	5935 MHz
Channel No.	2 Ch
RU Offset	61

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#5924.5	69.07	0.00	8.87	H	77.94	88.23	10.29	PK
#5924.5	55.53	0.00	8.87	H	64.40	68.23	3.83	AV
#5923.5	61.20	0.00	8.87	H	70.07	88.23	18.16	PK
#5923.5	48.25	0.00	8.87	H	57.12	68.23	11.11	AV
5460 - 5923	69.62	0.00	8.87	H	78.49	88.23	9.74	PK
5460 - 5923	46.70	0.00	8.87	H	55.57	68.23	12.66	AV
5350 - 5460	42.24	0.00	7.99	H	50.23	73.98	23.75	PK
5350 - 5460	28.66	0.00	7.99	H	36.65	53.98	17.33	AV
#5924.5	68.24	0.00	8.87	V	77.11	88.23	11.12	PK
#5924.5	54.76	0.00	8.87	V	63.63	68.23	4.60	AV
#5923.5	60.45	0.00	8.87	V	69.32	88.23	18.91	PK
#5923.5	47.63	0.00	8.87	V	56.50	68.23	11.73	AV
5460 - 5923	68.81	0.00	8.87	V	77.68	88.23	10.55	PK
5460 - 5923	45.94	0.00	8.87	V	54.81	68.23	13.42	AV
5350 - 5460	41.43	0.00	7.99	V	49.42	73.98	24.56	PK
5350 - 5460	27.97	0.00	7.99	V	35.96	53.98	18.02	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 8
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	7115 MHz
Channel No.	233 Ch
RU Offset	61

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#7125.5	62.93	0.00	13.82	H	76.75	88.23	11.48	PK
#7125.5	49.27	0.00	13.82	H	63.09	68.23	5.14	AV
#7126.5	55.95	0.00	13.82	H	69.77	88.23	18.46	PK
#7126.5	42.85	0.00	13.82	H	56.67	68.23	11.56	AV
7127 - 7250	63.59	0.00	14.19	H	77.78	88.23	10.45	PK
7127 - 7250	41.05	0.00	14.19	H	55.24	68.23	12.99	AV
7250 - 7750	38.55	0.00	14.74	H	53.29	73.98	20.69	PK
7250 - 7750	26.73	0.00	14.74	H	41.47	53.98	12.51	AV
#7125.5	62.57	0.00	13.82	V	76.39	88.23	11.84	PK
#7125.5	48.83	0.00	13.82	V	62.65	68.23	5.58	AV
#7126.5	55.71	0.00	13.82	V	69.53	88.23	18.70	PK
#7126.5	42.66	0.00	13.82	V	56.48	68.23	11.75	AV
7127 - 7250	63.25	0.00	14.19	V	77.44	88.23	10.79	PK
7127 - 7250	40.72	0.00	14.19	V	54.91	68.23	13.32	AV
7250 - 7750	38.28	0.00	14.74	V	53.02	73.98	20.96	PK
7250 - 7750	26.39	0.00	14.74	V	41.13	53.98	12.85	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

## 6) 802.11ax(HE20) SU

Band :	UNII 5
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	5935 MHz
Channel No.	2 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#5924.5	69.63	0.00	8.87	H	78.50	88.23	9.73	PK
#5924.5	55.38	0.00	8.87	H	64.25	68.23	3.98	AV
#5923.5	60.69	0.00	8.87	H	69.56	88.23	18.67	PK
#5923.5	48.03	0.00	8.87	H	56.90	68.23	11.33	AV
5460 - 5923	67.63	0.00	8.87	H	76.50	88.23	11.73	PK
5460 - 5923	46.45	0.00	8.87	H	55.32	68.23	12.91	AV
5350 - 5460	42.51	0.00	7.99	H	50.50	73.98	23.48	PK
5350 - 5460	28.76	0.00	7.99	H	36.75	53.98	17.23	AV
#5924.5	69.20	0.00	8.87	V	78.07	88.23	10.16	PK
#5924.5	54.73	0.00	8.87	V	63.60	68.23	4.63	AV
#5923.5	59.77	0.00	8.87	V	68.64	88.23	19.59	PK
#5923.5	47.35	0.00	8.87	V	56.22	68.23	12.01	AV
5460 - 5923	66.81	0.00	8.87	V	75.68	88.23	12.55	PK
5460 - 5923	45.76	0.00	8.87	V	54.63	68.23	13.60	AV
5350 - 5460	41.88	0.00	7.99	V	49.87	73.98	24.11	PK
5350 - 5460	28.24	0.00	7.99	V	36.23	53.98	17.75	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 8
Operation Mode:	802.11ax(HE20)
Transfer Rate:	MCS0
Operating Frequency	7115 MHz
Channel No.	233 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F- A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
#7125.5	59.55	0.00	13.82	H	73.37	88.23	14.86	PK
#7125.5	45.41	0.00	13.82	H	59.23	68.23	9.00	AV
#7126.5	50.42	0.00	13.82	H	64.24	88.23	23.99	PK
#7126.5	37.48	0.00	13.82	H	51.30	68.23	16.93	AV
7127 - 7250	55.76	0.00	14.19	H	69.95	88.23	18.28	PK
7127 - 7250	35.59	0.00	14.19	H	49.78	68.23	18.45	AV
7250 - 7750	38.28	0.00	14.74	H	53.02	73.98	20.96	PK
7250 - 7750	26.95	0.00	14.74	H	41.69	53.98	12.29	AV
#7125.5	59.22	0.00	13.82	V	73.04	88.23	15.19	PK
#7125.5	45.07	0.00	13.82	V	58.89	68.23	9.34	AV
#7126.5	50.28	0.00	13.82	V	64.10	88.23	24.13	PK
#7126.5	37.19	0.00	13.82	V	51.01	68.23	17.22	AV
7127 - 7250	55.46	0.00	14.19	V	69.65	88.23	18.58	PK
7127 - 7250	35.11	0.00	14.19	V	49.30	68.23	18.93	AV
7250 - 7750	37.94	0.00	14.74	V	52.68	73.98	21.30	PK
7250 - 7750	26.63	0.00	14.74	V	41.37	53.98	12.61	AV

Note : # integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

## 7) 802.11ax(HE40) 26 Tone

Band : UNII 5

Operation Mode: 802.11ax(HE40)

Transfer Rate: MCS0

Operating Frequency 5965 MHz

Channel No. 3 Ch

RU Offset 0

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	44.47	0.00	7.99	H	52.46	73.98	21.52	PK
5350 - 5460	28.89	0.00	7.99	H	36.88	53.98	17.10	AV
5350 - 5460	43.62	0.00	7.99	V	51.61	73.98	22.37	PK
5350 - 5460	28.25	0.00	7.99	V	36.24	53.98	17.74	AV
5460 - 5925	46.95	0.00	8.87	H	55.82	88.23	32.41	PK
5460 - 5925	38.42	0.00	8.87	H	47.29	68.23	20.94	AV
5460 - 5925	46.28	0.00	8.87	V	55.15	88.23	33.08	PK
5460 - 5925	37.76	0.00	8.87	V	46.63	68.23	21.60	AV

Band : UNII 8

Operation Mode: 802.11ax(HE40)

Transfer Rate: MCS0

Operating Frequency 7085 MHz

Channel No. 227 Ch

RU Offset 17

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	39.12	0.00	14.19	H	53.31	88.23	34.92	PK
7125 - 7250	26.65	0.00	14.19	H	40.84	68.23	27.39	AV
7125 - 7250	38.96	0.00	14.19	V	53.15	88.23	35.08	PK
7125 - 7250	26.43	0.00	14.19	V	40.62	68.23	27.61	AV
7250 - 7750	38.46	0.00	14.74	H	53.20	73.98	20.78	PK
7250 - 7750	26.92	0.00	14.74	H	41.66	53.98	12.32	AV
7250 - 7750	38.19	0.00	14.74	V	52.93	73.98	21.05	PK
7250 - 7750	26.74	0.00	14.74	V	41.48	53.98	12.50	AV

**8) 802.11ax(HE40) 484 Tone**

Band : UNII 5  
 Operation Mode: 802.11ax(HE40)  
 Transfer Rate: MCS0  
 Operating Frequency 5965 MHz  
 Channel No. 3 Ch  
 RU Offset 65

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	42.12	0.00	7.99	H	50.11	73.98	23.87	PK
5350 - 5460	29.02	0.00	7.99	H	37.01	53.98	16.97	AV
5350 - 5460	41.37	0.00	7.99	V	49.36	73.98	24.62	PK
5350 - 5460	28.26	0.00	7.99	V	36.25	53.98	17.73	AV
5460 - 5925	46.54	0.00	8.87	H	55.41	88.23	32.82	PK
5460 - 5925	37.13	0.00	8.87	H	46.00	68.23	22.23	AV
5460 - 5925	45.81	0.00	8.87	V	54.68	88.23	33.55	PK
5460 - 5925	36.42	0.00	8.87	V	45.29	68.23	22.94	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE40)  
 Transfer Rate: MCS0  
 Operating Frequency 7085 MHz  
 Channel No. 227 Ch  
 RU Offset 65

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	40.08	0.00	14.19	H	54.27	88.23	33.96	PK
7125 - 7250	27.35	0.00	14.19	H	41.54	68.23	26.69	AV
7125 - 7250	39.83	0.00	14.19	V	54.02	88.23	34.21	PK
7125 - 7250	27.12	0.00	14.19	V	41.31	68.23	26.92	AV
7250 - 7750	38.80	0.00	14.74	H	53.54	73.98	20.44	PK
7250 - 7750	26.90	0.00	14.74	H	41.64	53.98	12.34	AV
7250 - 7750	38.64	0.00	14.74	V	53.38	73.98	20.60	PK
7250 - 7750	26.71	0.00	14.74	V	41.45	53.98	12.53	AV

## 9) 802.11ax(HE40) SU

Band : UNII 5

Operation Mode: 802.11ax(HE40)

Transfer Rate: MCS0

Operating Frequency 5965 MHz

Channel No. 3 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	40.92	0.00	7.99	H	48.91	73.98	25.07	PK
5350 - 5460	29.05	0.00	7.99	H	37.04	53.98	16.94	AV
5350 - 5460	40.27	0.00	7.99	V	48.26	73.98	25.72	PK
5350 - 5460	28.31	0.00	7.99	V	36.30	53.98	17.68	AV
5460 - 5925	47.07	0.00	8.87	H	55.94	88.23	32.29	PK
5460 - 5925	38.05	0.00	8.87	H	46.92	68.23	21.31	AV
5460 - 5925	46.39	0.00	8.87	V	55.26	88.23	32.97	PK
5460 - 5925	37.18	0.00	8.87	V	46.05	68.23	22.18	AV

Band : UNII 8

Operation Mode: 802.11ax(HE40)

Transfer Rate: MCS0

Operating Frequency 7085 MHz

Channel No. 227 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	38.89	0.00	14.19	H	53.08	88.23	35.15	PK
7125 - 7250	27.25	0.00	14.19	H	41.44	68.23	26.79	AV
7125 - 7250	38.67	0.00	14.19	V	52.86	88.23	35.37	PK
7125 - 7250	27.08	0.00	14.19	V	41.27	68.23	26.96	AV
7250 - 7750	38.74	0.00	14.74	H	53.48	73.98	20.50	PK
7250 - 7750	27.05	0.00	14.74	H	41.79	53.98	12.19	AV
7250 - 7750	38.51	0.00	14.74	V	53.25	73.98	20.73	PK
7250 - 7750	26.83	0.00	14.74	V	41.57	53.98	12.41	AV

**10) 802.11ax(HE80) 26 Tone**

Band : UNII 5  
 Operation Mode: 802.11ax(HE80)  
 Transfer Rate: MCS0  
 Operating Frequency 5985 MHz  
 Channel No. 7 Ch  
 RU Offset 0

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	44.55	0.00	7.99	H	52.54	73.98	21.44	PK
5350 - 5460	28.99	0.00	7.99	H	36.98	53.98	17.00	AV
5350 - 5460	43.71	0.00	7.99	V	51.70	73.98	22.28	PK
5350 - 5460	28.20	0.00	7.99	V	36.19	53.98	17.79	AV
5460 - 5925	48.95	0.00	8.87	H	57.82	88.23	30.41	PK
5460 - 5925	37.44	0.00	8.87	H	46.31	68.23	21.92	AV
5460 - 5925	48.16	0.00	8.87	V	57.03	88.23	31.20	PK
5460 - 5925	36.63	0.00	8.87	V	45.50	68.23	22.73	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE80)  
 Transfer Rate: MCS0  
 Operating Frequency 7025 MHz  
 Channel No. 215 Ch  
 RU Offset 36

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	38.26	0.00	14.19	H	52.45	88.23	35.78	PK
7125 - 7250	26.69	0.00	14.19	H	40.88	68.23	27.35	AV
7125 - 7250	38.07	0.00	14.19	V	52.26	88.23	35.97	PK
7125 - 7250	26.43	0.00	14.19	V	40.62	68.23	27.61	AV
7250 - 7750	38.21	0.00	14.74	H	52.95	73.98	21.03	PK
7250 - 7750	26.98	0.00	14.74	H	41.72	53.98	12.26	AV
7250 - 7750	37.94	0.00	14.74	V	52.68	73.98	21.30	PK
7250 - 7750	26.61	0.00	14.74	V	41.35	53.98	12.63	AV

**11) 802.11ax(HE80) 996 Tone**

Band : UNII 5  
 Operation Mode: 802.11ax(HE80)  
 Transfer Rate: MCS0  
 Operating Frequency 5985 MHz  
 Channel No. 7 Ch  
 RU Offset 67

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	40.30	0.00	7.99	H	48.29	73.98	25.69	PK
5350 - 5460	28.95	0.00	7.99	H	36.94	53.98	17.04	AV
5350 - 5460	39.54	0.00	7.99	V	47.53	73.98	26.45	PK
5350 - 5460	28.14	0.00	7.99	V	36.13	53.98	17.85	AV
5460 - 5925	43.92	0.00	8.87	H	52.79	88.23	35.44	PK
5460 - 5925	36.32	0.00	8.87	H	45.19	68.23	23.04	AV
5460 - 5925	43.27	0.00	8.87	V	52.14	88.23	36.09	PK
5460 - 5925	35.56	0.00	8.87	V	44.43	68.23	23.80	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE80)  
 Transfer Rate: MCS0  
 Operating Frequency 7025 MHz  
 Channel No. 215 Ch  
 RU Offset 67

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	38.58	0.00	14.19	H	52.77	88.23	35.46	PK
7125 - 7250	27.22	0.00	14.19	H	41.41	68.23	26.82	AV
7125 - 7250	38.35	0.00	14.19	V	52.54	88.23	35.69	PK
7125 - 7250	27.00	0.00	14.19	V	41.19	68.23	27.04	AV
7250 - 7750	38.22	0.00	14.74	H	52.96	73.98	21.02	PK
7250 - 7750	26.84	0.00	14.74	H	41.58	53.98	12.40	AV
7250 - 7750	38.14	0.00	14.74	V	52.88	73.98	21.10	PK
7250 - 7750	26.67	0.00	14.74	V	41.41	53.98	12.57	AV

**12) 802.11ax(HE80) SU**

Band : UNII 5  
 Operation Mode: 802.11ax(HE80)  
 Transfer Rate: MCS0  
 Operating Frequency 5985 MHz  
 Channel No. 7 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	40.68	0.00	7.99	H	48.67	73.98	25.31	PK
5350 - 5460	28.89	0.00	7.99	H	36.88	53.98	17.10	AV
5350 - 5460	39.77	0.00	7.99	V	47.76	73.98	26.22	PK
5350 - 5460	28.12	0.00	7.99	V	36.11	53.98	17.87	AV
5460 - 5925	43.62	0.00	8.87	H	52.49	88.23	35.74	PK
5460 - 5925	36.43	0.00	8.87	H	45.30	68.23	22.93	AV
5460 - 5925	42.73	0.00	8.87	V	51.60	88.23	36.63	PK
5460 - 5925	35.68	0.00	8.87	V	44.55	68.23	23.68	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE80)  
 Transfer Rate: MCS0  
 Operating Frequency 7025 MHz  
 Channel No. 215 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	38.62	0.00	14.19	H	52.81	88.23	35.42	PK
7125 - 7250	26.88	0.00	14.19	H	41.07	68.23	27.16	AV
7125 - 7250	38.34	0.00	14.19	V	52.53	88.23	35.70	PK
7125 - 7250	26.67	0.00	14.19	V	40.86	68.23	27.37	AV
7250 - 7750	38.32	0.00	14.74	H	53.06	73.98	20.92	PK
7250 - 7750	26.71	0.00	14.74	H	41.45	53.98	12.53	AV
7250 - 7750	38.16	0.00	14.74	V	52.90	73.98	21.08	PK
7250 - 7750	26.45	0.00	14.74	V	41.19	53.98	12.79	AV

**13) 802.11ax(HE160)\_80L 996 Tone**

Band : UNII 5  
 Operation Mode: 802.11ax(HE160)\_80L  
 Transfer Rate: MCS0  
 Operating Frequency 6025 MHz  
 Channel No. 15 Ch  
 RU Offset 67

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	42.32	0.00	7.99	H	50.31	73.98	23.67	PK
5350 - 5460	28.82	0.00	7.99	H	36.81	53.98	17.17	AV
5350 - 5460	41.66	0.00	7.99	V	49.65	73.98	24.33	PK
5350 - 5460	28.25	0.00	7.99	V	36.24	53.98	17.74	AV
5460 - 5925	52.21	0.00	8.87	H	61.08	88.23	27.15	PK
5460 - 5925	32.22	0.00	8.87	H	41.09	68.23	27.14	AV
5460 - 5925	51.45	0.00	8.87	V	60.32	88.23	27.91	PK
5460 - 5925	31.43	0.00	8.87	V	40.30	68.23	27.93	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE160)\_80L  
 Transfer Rate: MCS0  
 Operating Frequency 6985 MHz  
 Channel No. 207 Ch  
 RU Offset 67

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	44.16	0.00	14.19	H	58.35	88.23	29.88	PK
7125 - 7250	26.55	0.00	14.19	H	40.74	68.23	27.49	AV
7125 - 7250	43.76	0.00	14.19	V	57.95	88.23	30.28	PK
7125 - 7250	26.24	0.00	14.19	V	40.43	68.23	27.80	AV
7250 - 7750	37.89	0.00	14.74	H	52.63	73.98	21.35	PK
7250 - 7750	26.42	0.00	14.74	H	41.16	53.98	12.82	AV
7250 - 7750	37.54	0.00	14.74	V	52.28	73.98	21.70	PK
7250 - 7750	26.19	0.00	14.74	V	40.93	53.98	13.05	AV

**14) 802.11ax(HE160)\_80U 996 Tone**

Band : UNII 5  
 Operation Mode: 802.11ax(HE160)\_80U  
 Transfer Rate: MCS0  
 Operating Frequency 6025 MHz  
 Channel No. 15 Ch  
 RU Offset 67

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	41.05	0.00	7.99	H	49.04	73.98	24.94	PK
5350 - 5460	28.88	0.00	7.99	H	36.87	53.98	17.11	AV
5350 - 5460	40.73	0.00	7.99	V	48.72	73.98	25.26	PK
5350 - 5460	27.97	0.00	7.99	V	35.96	53.98	18.02	AV
5460 - 5925	52.35	0.00	8.87	H	61.22	88.23	27.01	PK
5460 - 5925	31.58	0.00	8.87	H	40.45	68.23	27.78	AV
5460 - 5925	51.98	0.00	8.87	V	60.85	88.23	27.38	PK
5460 - 5925	31.21	0.00	8.87	V	40.08	68.23	28.15	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE160)\_80U  
 Transfer Rate: MCS0  
 Operating Frequency 6985 MHz  
 Channel No. 207 Ch  
 RU Offset 67

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	43.74	0.00	14.19	H	57.93	88.23	30.30	PK
7125 - 7250	26.51	0.00	14.19	H	40.70	68.23	27.53	AV
7125 - 7250	43.27	0.00	14.19	V	57.46	88.23	30.77	PK
7125 - 7250	26.03	0.00	14.19	V	40.22	68.23	28.01	AV
7250 - 7750	38.51	0.00	14.74	H	53.25	73.98	20.73	PK
7250 - 7750	26.38	0.00	14.74	H	41.12	53.98	12.86	AV
7250 - 7750	38.11	0.00	14.74	V	52.85	73.98	21.13	PK
7250 - 7750	25.91	0.00	14.74	V	40.65	53.98	13.33	AV

## 15) 802.11ax(HE160) 996\*2 Tone

Band : UNII 5

Operation Mode: 802.11ax(HE160)

Transfer Rate: MCS0

Operating Frequency 6025 MHz

Channel No. 15 Ch

RU Offset 68

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	40.55	0.00	7.99	H	48.54	73.98	25.44	PK
5350 - 5460	28.81	0.00	7.99	H	36.80	53.98	17.18	AV
5350 - 5460	40.23	0.00	7.99	V	48.22	73.98	25.76	PK
5350 - 5460	28.56	0.00	7.99	V	36.55	53.98	17.43	AV
5460 - 5925	44.83	0.00	8.87	H	53.70	88.23	34.53	PK
5460 - 5925	32.76	0.00	8.87	H	41.63	68.23	26.60	AV
5460 - 5925	44.54	0.00	8.87	V	53.41	88.23	34.82	PK
5460 - 5925	32.42	0.00	8.87	V	41.29	68.23	26.94	AV

Band : UNII 8

Operation Mode: 802.11ax(HE160)

Transfer Rate: MCS0

Operating Frequency 6985 MHz

Channel No. 207 Ch

RU Offset 68

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	38.35	0.00	14.19	H	52.54	88.23	35.69	PK
7125 - 7250	26.22	0.00	14.19	H	40.41	68.23	27.82	AV
7125 - 7250	37.84	0.00	14.19	V	52.03	88.23	36.20	PK
7125 - 7250	25.83	0.00	14.19	V	40.02	68.23	28.21	AV
7250 - 7750	38.42	0.00	14.74	H	53.16	73.98	20.82	PK
7250 - 7750	26.39	0.00	14.74	H	41.13	53.98	12.85	AV
7250 - 7750	37.90	0.00	14.74	V	52.64	73.98	21.34	PK
7250 - 7750	26.16	0.00	14.74	V	40.90	53.98	13.08	AV

**16) 802.11ax(HE160) SU**

Band : UNII 5  
 Operation Mode: 802.11ax(HE160)  
 Transfer Rate: MCS0  
 Operating Frequency 6025 MHz  
 Channel No. 15 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
5350 - 5460	40.93	0.00	7.99	H	48.92	73.98	25.06	PK
5350 - 5460	28.85	0.00	7.99	H	36.84	53.98	17.14	AV
5350 - 5460	40.73	0.00	7.99	V	48.72	73.98	25.26	PK
5350 - 5460	28.61	0.00	7.99	V	36.60	53.98	17.38	AV
5460 - 5925	46.17	0.00	8.87	H	55.04	88.23	33.19	PK
5460 - 5925	33.65	0.00	8.87	H	42.52	68.23	25.71	AV
5460 - 5925	45.79	0.00	8.87	V	54.66	88.23	33.57	PK
5460 - 5925	33.37	0.00	8.87	V	42.24	68.23	25.99	AV

Band : UNII 8  
 Operation Mode: 802.11ax(HE160)  
 Transfer Rate: MCS0  
 Operating Frequency 6985 MHz  
 Channel No. 207 Ch

Frequency [MHz]	Measured Value [dB $\mu$ V]	Duty Cycle Factor	A.F+C.L+D.F-A.G+ATT [dB/m]	ANT. POL [H/V]	Total [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Measurement Type
7125 - 7250	38.10	0.00	14.19	H	52.29	88.23	35.94	PK
7125 - 7250	26.35	0.00	14.19	H	40.54	68.23	27.69	AV
7125 - 7250	37.66	0.00	14.19	V	51.85	88.23	36.38	PK
7125 - 7250	25.89	0.00	14.19	V	40.08	68.23	28.15	AV
7250 - 7750	38.12	0.00	14.74	H	52.86	73.98	21.12	PK
7250 - 7750	26.35	0.00	14.74	H	41.09	53.98	12.89	AV
7250 - 7750	37.78	0.00	14.74	V	52.52	73.98	21.46	PK
7250 - 7750	26.04	0.00	14.74	V	40.78	53.98	13.20	AV

**Note:**


All Modes of operation were investigated and the worst case configuration results are reported.

In order to simplify the report, We only have attached Bandedge result of worst case.


■ Test Plots

[MIMO]


Average result (802.11ax(HE20), Ch.2) (UNII 5\_106 Tone RU53) – Z-H

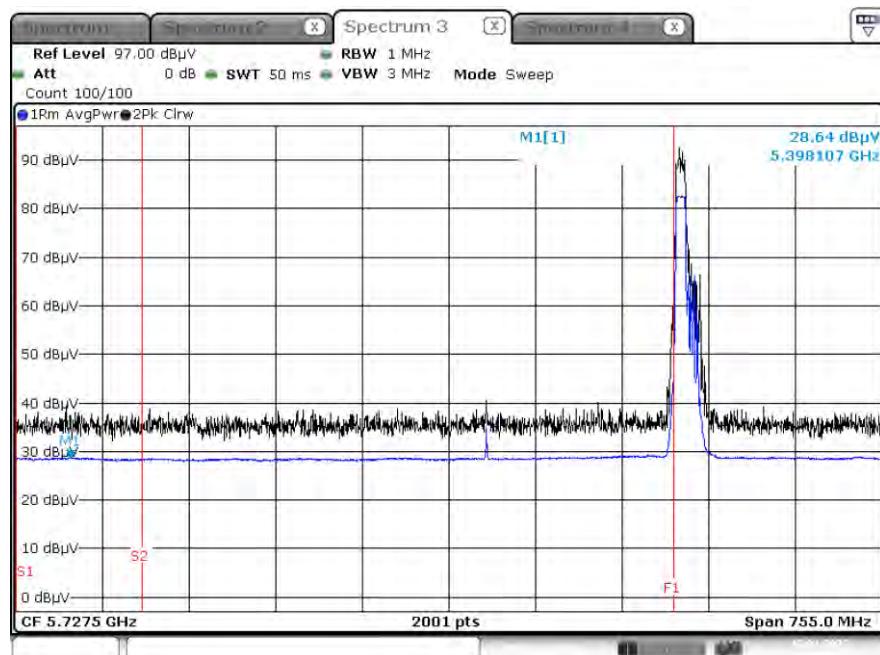


Peak result (802.11ax(HE20), Ch.2) (UNII 5\_106 Tone RU53) – Z-H

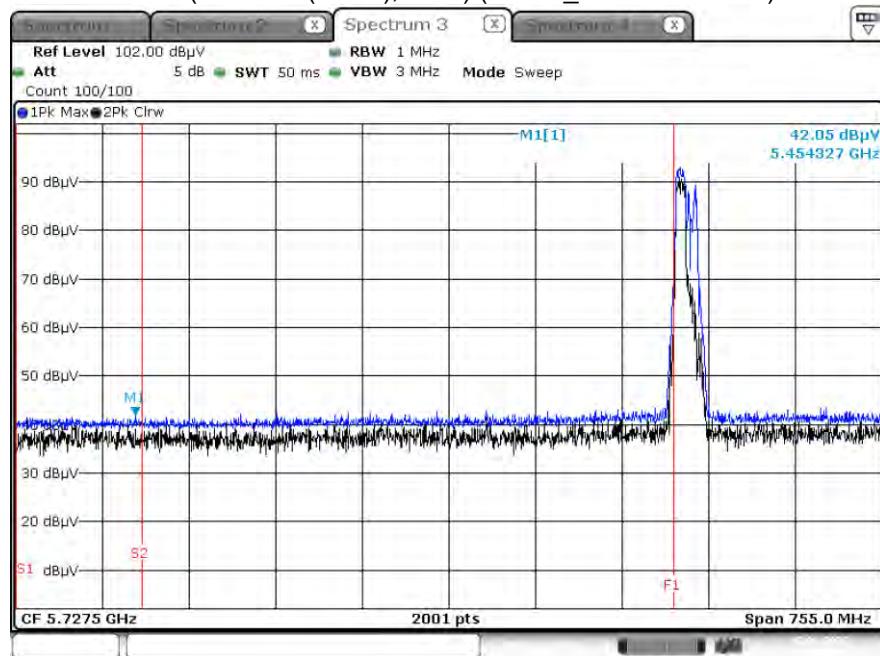


Average result (802.11ax(HE20), Ch.2) (UNII 5\_106 Tone RU53) – Z-H

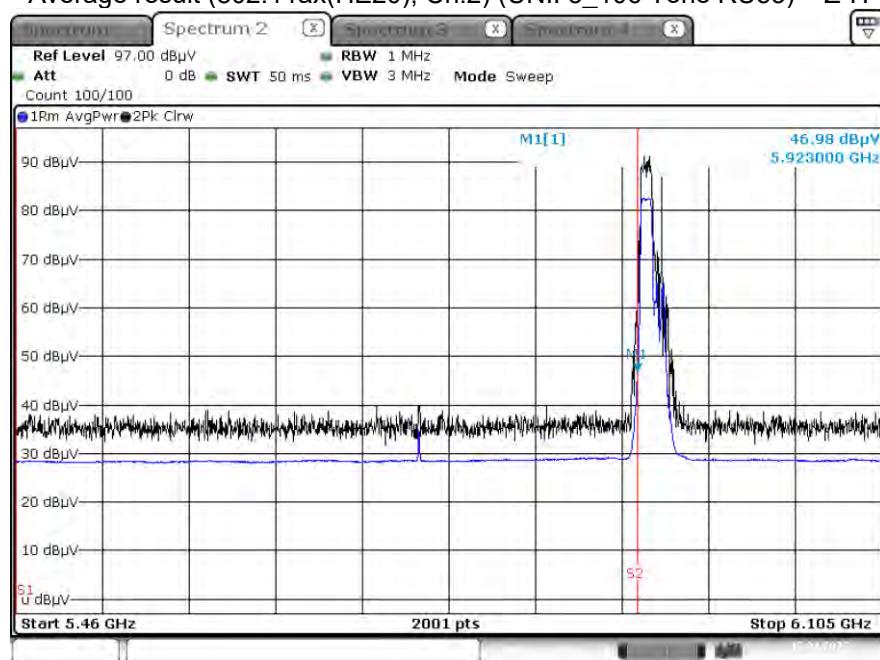


Peak result (802.11ax(HE20), Ch.2) (UNII 5\_106 Tone RU53) – Z-H

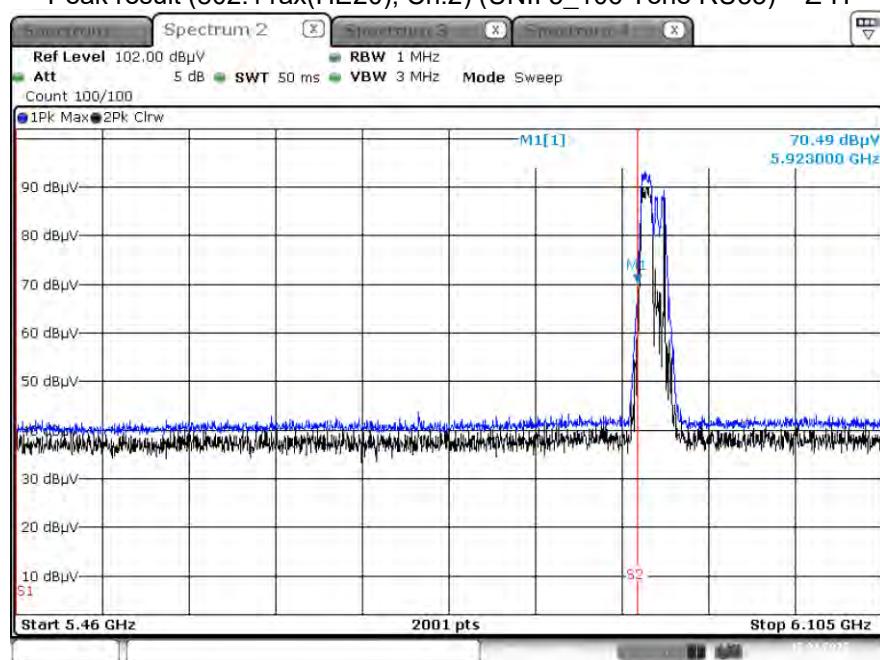


Average result (802.11ax(HE20), Ch.2) (UNII\_5\_106 Tone RU53) – Z-H  
(Integration method Used\_5923.5 MHz)

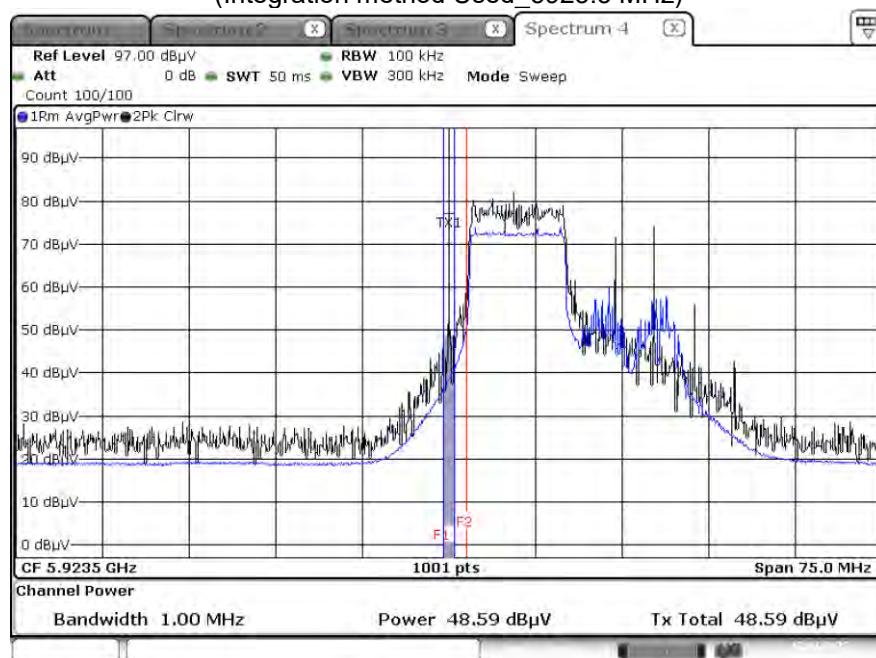


Average result (802.11ax(HE20), Ch.2) (UNII\_5\_106 Tone RU53) – Z-H  
(Integration method Used\_5924.5 MHz)

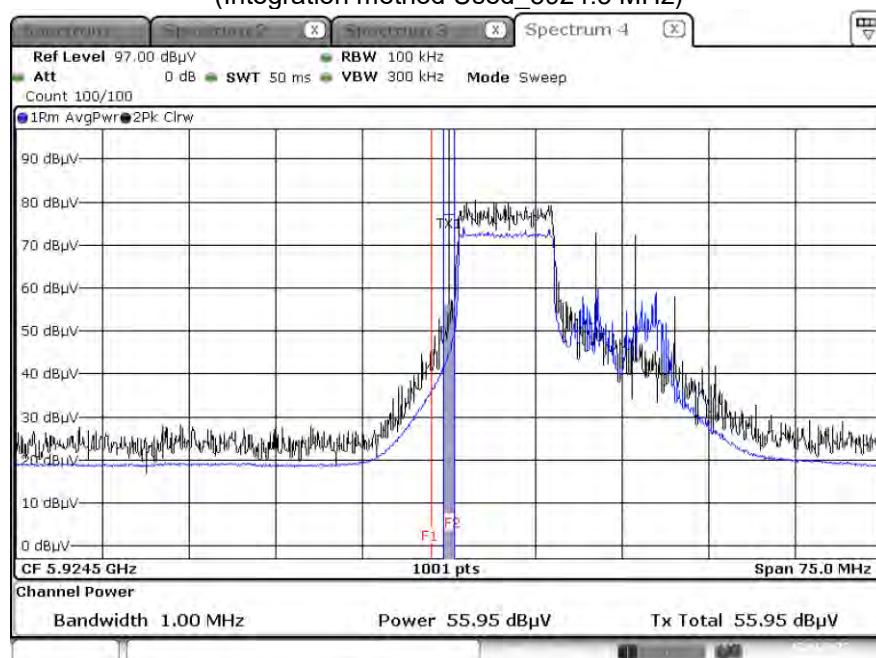

Peak result (802.11ax(HE20), Ch.2) (UNII 5\_106 Tone RU53) – Z-H  
(Integration method Used\_5923.5 MHz)

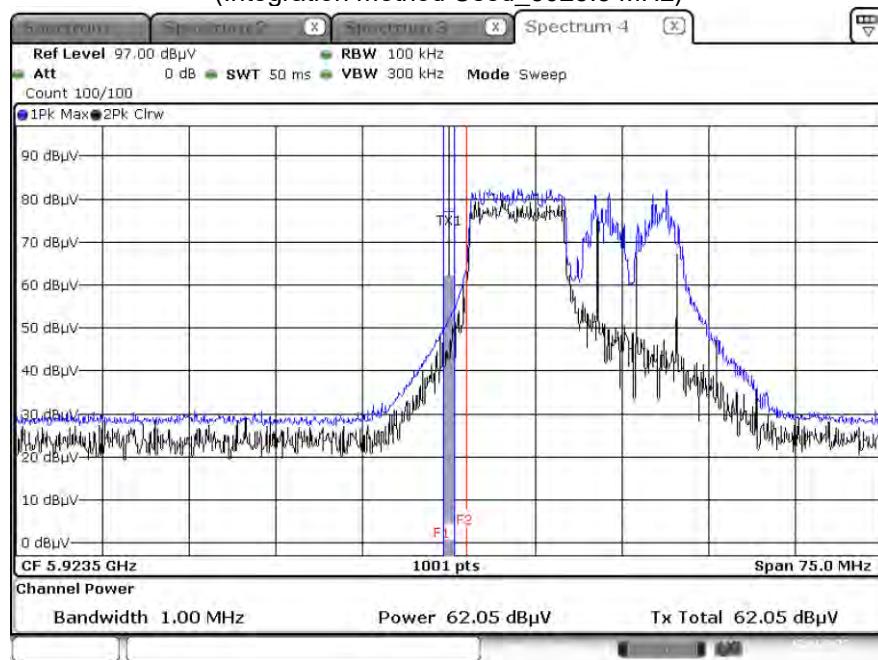

Peak result (802.11ax(HE20), Ch.2) (UNII 5\_106 Tone RU53) – Z-H  
(Integration method Used\_5924.5 MHz)

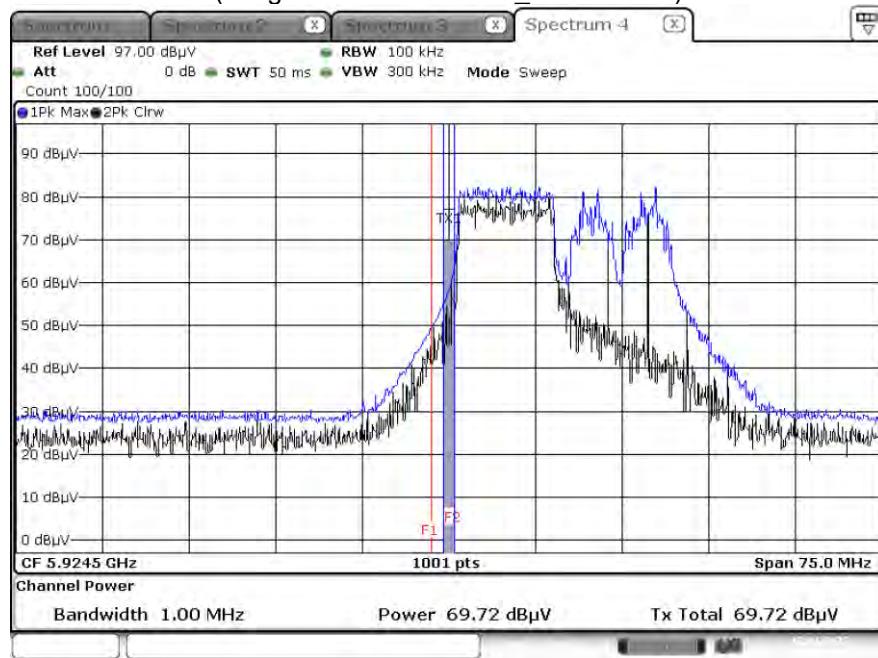

**Note:**

Only the worst case plots for Radiated Restricted Band Edge.

## 10.11 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions

Test


1 / 2

## Test Report

### Common Information

EUT : SM-X818U  
 Operating Conditions : 6G WLAN Mode  
 Comment :

Full Spectrum

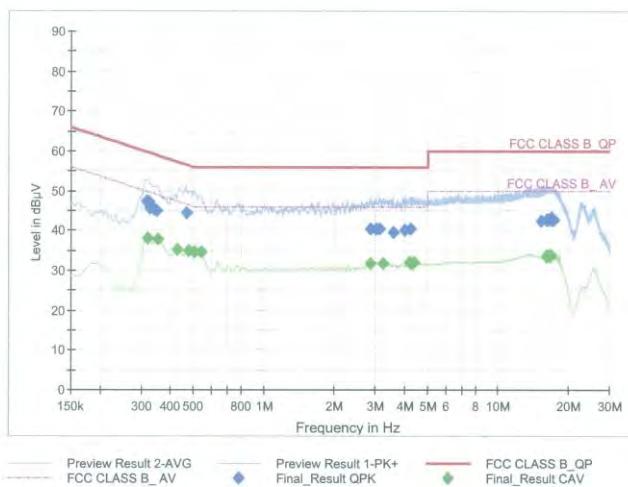

### Final\_Result\_QPK

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.3165	47.45	59.80	12.35	1000.0	9.000	L1	OFF	9.7
0.3210	47.21	59.68	12.47	1000.0	9.000	L1	OFF	9.7
0.3278	45.64	59.51	13.87	1000.0	9.000	L1	OFF	9.7
0.3413	45.15	59.17	14.02	1000.0	9.000	L1	OFF	9.7
0.3480	44.96	59.01	14.05	1000.0	9.000	L1	OFF	9.7
0.4650	44.54	56.60	12.06	1000.0	9.000	L1	OFF	9.7
2.8535	40.36	56.00	15.64	1000.0	9.000	L1	OFF	9.8
3.0290	40.42	56.00	15.58	1000.0	9.000	L1	OFF	9.8
3.1190	40.34	56.00	15.66	1000.0	9.000	L1	OFF	9.8
3.5645	39.53	56.00	16.47	1000.0	9.000	L1	OFF	9.8
4.0213	40.15	56.00	15.85	1000.0	9.000	L1	OFF	9.8
4.2170	40.47	56.00	15.53	1000.0	9.000	L1	OFF	9.8
15.3253	42.39	60.00	17.61	1000.0	9.000	L1	OFF	10.2
16.1038	42.78	60.00	17.22	1000.0	9.000	L1	OFF	10.2
16.2770	42.70	60.00	17.30	1000.0	9.000	L1	OFF	10.2
16.8418	42.76	60.00	17.24	1000.0	9.000	L1	OFF	10.3
16.9250	43.14	60.00	16.86	1000.0	9.000	L1	OFF	10.3
17.2738	42.78	60.00	17.22	1000.0	9.000	L1	OFF	10.3

2023-04-18

오전 2:15:40

Test

2 / 2

**Final\_Result\_CAV**

Frequency (MHz)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.3188	38.10	49.74	11.64	1000.0	9.000	L1	OFF	9.7
0.3525	37.84	48.90	11.07	1000.0	9.000	L1	OFF	9.7
0.4290	35.08	47.27	12.19	1000.0	9.000	L1	OFF	9.7
0.4785	34.92	46.37	11.44	1000.0	9.000	L1	OFF	9.7
0.5045	34.49	46.00	11.51	1000.0	9.000	L1	OFF	9.7
0.5383	34.60	46.00	11.40	1000.0	9.000	L1	OFF	9.7
2.8535	31.80	46.00	14.20	1000.0	9.000	L1	OFF	9.8
3.2270	31.75	46.00	14.25	1000.0	9.000	L1	OFF	9.8
4.1968	32.15	46.00	13.85	1000.0	9.000	L1	OFF	9.8
4.3025	31.82	46.00	14.18	1000.0	9.000	L1	OFF	9.8
4.3138	31.74	46.00	14.26	1000.0	9.000	L1	OFF	9.8
4.4060	31.92	46.00	14.08	1000.0	9.000	L1	OFF	9.8
16.1038	33.41	50.00	16.59	1000.0	9.000	L1	OFF	10.2
16.1758	33.70	50.00	16.30	1000.0	9.000	L1	OFF	10.2
16.4435	33.72	50.00	16.28	1000.0	9.000	L1	OFF	10.2
16.7023	33.58	50.00	16.42	1000.0	9.000	L1	OFF	10.3
16.7945	33.72	50.00	16.28	1000.0	9.000	L1	OFF	10.3
16.8418	33.81	50.00	16.19	1000.0	9.000	L1	OFF	10.3

2023-04-18

오전 2:15:40

## 11. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/02/2024	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/14/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	HP	KR75303243	04/24/2024	Annual
Attenuator(10 dB) (DC-26.5 GHz)	8493C	HP	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Vector Signal Generator	SMW200A	Rohde & Schwarz	100988	03/02/2024	Annual
4 Way Power Divider	4426-4	Narda	11927	01/17/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual
Wireless AP	GT-AXE11000	ASUS	M6IAJF201782 (FCC ID : MSQ-RTAXJF00)	N/A	N/A

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp &Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/16/2023	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/02/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
HPF(3~18GHz)+LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/17/2024	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/17/2024	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/17/2024	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/17/2024	Annual
HPF(7~18GHz)+LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/17/2024	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/17/2024	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

**12. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC050-P