

FCC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 09, 2023

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2305-FC012

FCC ID: A3LSMX818U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-X818U
 EUT Type: Mobile phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §24, §2

Main 1 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band25/2 (1.4)	1850.7 - 1914.3	1M10G7D	QPSK	0.216	23.34
		1M10W7D	16QAM	0.179	22.54
		1M10W7D	64QAM	0.142	21.53
		1M10W7D	256QAM	0.069	18.41
LTE – Band25/2 (3)	1851.5 - 1913.5	2M73G7D	QPSK	0.200	23.01
		2M71W7D	16QAM	0.168	22.26
		2M72W7D	64QAM	0.132	21.19
		2M71W7D	256QAM	0.064	18.09
LTE – Band25/2 (5)	1852.5 - 1912.5	4M51G7D	QPSK	0.187	22.71
		4M52W7D	16QAM	0.157	21.96
		4M52W7D	64QAM	0.124	20.92
		4M49W7D	256QAM	0.061	17.83
LTE – Band25/2 (10)	1855.0 - 1910.0	8M98G7D	QPSK	0.193	22.86
		8M99W7D	16QAM	0.163	22.13
		9M01W7D	64QAM	0.127	21.04
		9M02W7D	256QAM	0.062	17.95
LTE – Band25/2 (15)	1857.5 - 1907.5	13M5G7D	QPSK	0.191	22.82
		13M5W7D	16QAM	0.164	22.16
		13M5W7D	64QAM	0.127	21.03
		13M5W7D	256QAM	0.062	17.93
LTE – Band25/2 (20)	1860.0 - 1905.0	18M0G7D	QPSK	0.194	22.88
		18M0W7D	16QAM	0.165	22.17
		18M0W7D	64QAM	0.125	20.98
		18M0W7D	256QAM	0.062	17.91

Sub 2 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band25/2 (1.4)	1850.7 - 1914.3	1M10G7D	QPSK	0.139	21.42
		1M10W7D	16QAM	0.109	20.39
		1M10W7D	64QAM	0.089	19.51
		1M10W7D	256QAM	0.045	16.55
LTE – Band25/2 (3)	1851.5 - 1913.5	2M71G7D	QPSK	0.150	21.77
		2M71W7D	16QAM	0.119	20.76
		2M71W7D	64QAM	0.098	19.89
		2M71W7D	256QAM	0.050	16.96
LTE – Band25/2 (5)	1852.5 - 1912.5	4M52G7D	QPSK	0.147	21.67
		4M52W7D	16QAM	0.116	20.66
		4M52W7D	64QAM	0.096	19.82
		4M52W7D	256QAM	0.050	16.97
LTE – Band25/2 (10)	1855.0 - 1910.0	9M01G7D	QPSK	0.149	21.74
		9M01W7D	16QAM	0.118	20.71
		9M02W7D	64QAM	0.097	19.86
		8M99W7D	256QAM	0.050	16.95
LTE – Band25/2 (15)	1857.5 - 1907.5	13M5G7D	QPSK	0.135	21.29
		13M5W7D	16QAM	0.106	20.24
		13M5W7D	64QAM	0.085	19.31
		13M5W7D	256QAM	0.043	16.30
LTE – Band25/2 (20)	1860.0 - 1905.0	18M0G7D	QPSK	0.129	21.09
		18M0W7D	16QAM	0.101	20.04
		18M0W7D	64QAM	0.081	19.08
		18M0W7D	256QAM	0.041	16.13

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2305-FC012

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC012	May 09, 2023	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 BAND EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 WORST CASE(RADIATED TEST)	17
3.10 WORST CASE(CONDUCTED TEST)	18
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	20
6. SUMMARY OF TEST RESULTS	21
7. SAMPLE CALCULATION	22
8. TEST DATA (Main 1 Ant).....	24
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	24
8.2 RADIATED SPURIOUS EMISSIONS	27
8.3 PEAK-TO-AVERAGE RATIO.....	28
8.4 OCCUPIED BANDWIDTH	29
8.5 CONDUCTED SPURIOUS EMISSIONS	30
8.6 BAND EDGE	30
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	31
9. TEST DATA (Sub 2 Ant)	49
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	49
9.2 RADIATED SPURIOUS EMISSIONS	52
9.3 PEAK-TO-AVERAGE RATIO.....	53
9.4 OCCUPIED BANDWIDTH	54
9.5 CONDUCTED SPURIOUS EMISSIONS	55
9.6 BAND EDGE	55
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	56
10. TEST PLOTS (Main 1 Ant)	74
11. TEST PLOTS (Sub 2 Ant).....	195
12. APPENDIX A_ TEST SETUP PHOTO	316

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX818U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§24, §2
EUT Type:	Tablet
Model(s):	SM-X818U
Tx Frequency:	1850.7 MHz – 1914.3 MHz (LTE – Band25/2 (1.4 MHz)) 1851.5 MHz – 1913.5 MHz (LTE – Band25/2 (3 MHz)) 1852.5 MHz – 1912.5 MHz (LTE – Band25/2 (5 MHz)) 1855.0 MHz – 1910.0 MHz (LTE – Band25/2 (10 MHz)) 1857.5 MHz – 1907.5 MHz (LTE – Band25/2 (15 MHz)) 1860.0 MHz – 1905.0 MHz (LTE – Band25/2 (20 MHz))
Date(s) of Tests:	March 13, 2023 ~ April 24, 2023
Serial number:	Radiated: R32W2003H3M Conducted: R32W2003JJD

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), WIFI 6E AIT, Keyboard, S-pen, mmWave.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

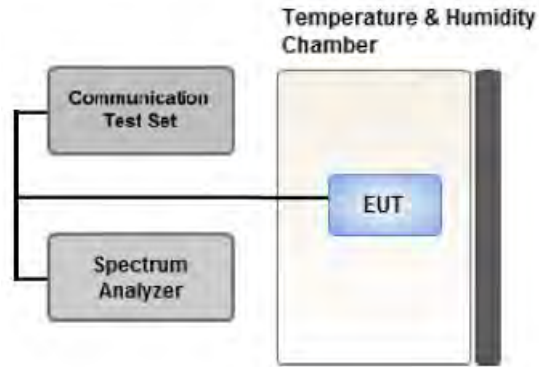

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

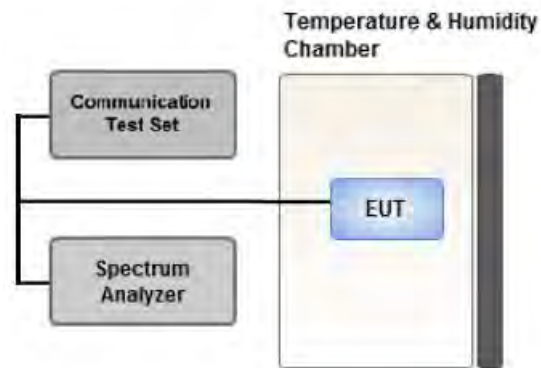

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

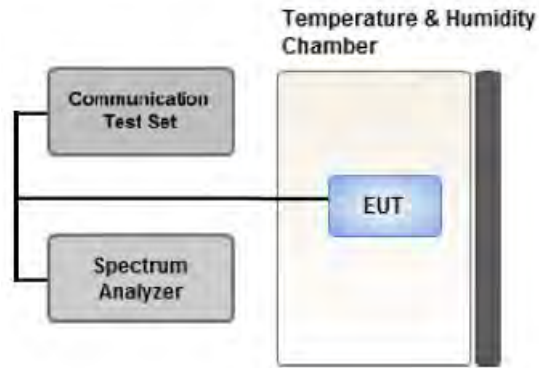

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

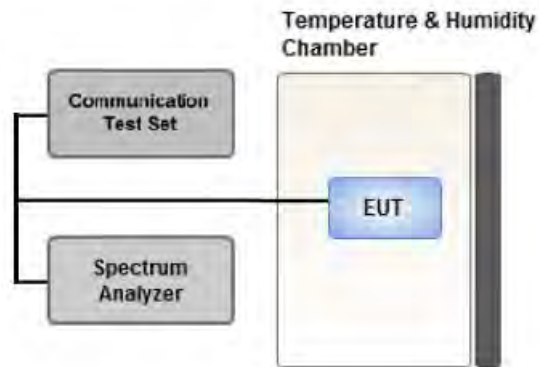

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz}/ \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

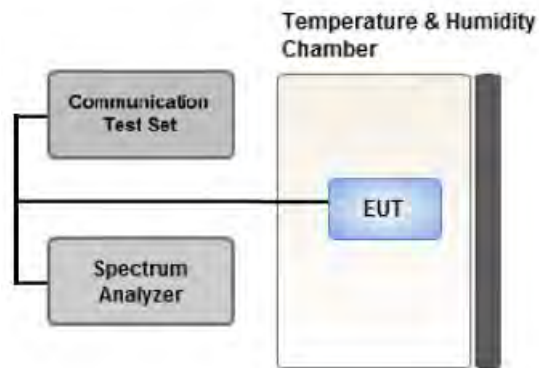

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature

(20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 1.4 MHz(Main 1 Ant), 3 MHz(Sub 2 Ant))
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- LTE BAND 25 (1850 – 1915 MHz) overlaps the entire frequency range of LTE BAND 2 (1850 - 1910 MHz) and they have the same Tune-up power.
Therefore, test data provided in this report covers BAND 2 as well as BAND 25.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode : Stand alone, Stand alone + External accessories (Earphone, keyboard, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone

[Main 1 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

[Sub 2 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Z

3.10 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

- All modes of operation were investigated and the worst case configuration results are reported.
 - LTE BAND 25 (1850 – 1915 MHz) overlaps the entire frequency range of LTE BAND 2 (1850 - 1910 MHz) and they have the same Tune-up power.
- Therefore, test data provided in this report covers BAND 2 as well as BAND 25.

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	01/19/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/19/2024	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/21/2023	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2023	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/20/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/29/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2023	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	08/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	03/21/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	12/01/2023	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/05/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2023	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §24.238(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§24.235	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§24.232(c)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §24.238(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA (Main 1 Ant)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1850.7	LTE B25/B2 1.4 MHz	QPSK	-18.71	15.07	10.40	2.13	H	< 2.00	0.216	23.34	
		16-QAM	-19.51	14.27	10.40	2.13	H		0.179	22.54	
		64-QAM	-20.52	13.26	10.40	2.13	H		0.142	21.53	
		256-QAM	-23.64	10.14	10.40	2.13	H		0.069	18.41	
1882.5		QPSK	-19.64	14.98	10.40	2.23	H		0.207	23.15	
		16-QAM	-20.34	14.28	10.40	2.23	H		0.176	22.45	
		64-QAM	-21.46	13.16	10.40	2.23	H		0.136	21.33	
		256-QAM	-24.59	10.03	10.40	2.23	H		0.066	18.20	
1914.3		QPSK	-20.36	14.22	10.40	2.15	H		0.177	22.47	
		16-QAM	-21.09	13.49	10.40	2.15	H		0.149	21.74	
		64-QAM	-22.16	12.42	10.40	2.15	H		0.117	20.67	
		256-QAM	-25.26	9.32	10.40	2.15	H		0.057	17.57	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1851.5	LTE B25/B2 3 MHz	QPSK	-19.04	14.74	10.40	2.13	H	< 2.00	0.200	23.01	
		16-QAM	-19.79	13.99	10.40	2.13	H		0.168	22.26	
		64-QAM	-20.86	12.92	10.40	2.13	H		0.132	21.19	
		256-QAM	-23.96	9.82	10.40	2.13	H		0.064	18.09	
1882.5		QPSK	-19.80	14.82	10.40	2.23	H		0.199	22.99	
		16-QAM	-20.53	14.09	10.40	2.23	H		0.168	22.26	
		64-QAM	-21.62	13.00	10.40	2.23	H		0.131	21.17	
		256-QAM	-24.75	9.87	10.40	2.23	H		0.064	18.04	
1913.5		QPSK	-20.40	14.17	10.40	2.14	H		0.175	22.43	
		16-QAM	-21.16	13.41	10.40	2.14	H		0.147	21.67	
		64-QAM	-22.22	12.35	10.40	2.14	H		0.115	20.61	
		256-QAM	-25.34	9.23	10.40	2.14	H		0.056	17.49	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1852.5	LTE B25/B2 5 MHz	QPSK	-19.36	14.42	10.40	2.13	H	< 2.00		0.186	22.69
		16-QAM	-20.09	13.69	10.40	2.13	H			0.157	21.96
		64-QAM	-21.13	12.65	10.40	2.13	H			0.124	20.92
		256-QAM	-24.22	9.56	10.40	2.13	H			0.061	17.83
1882.5		QPSK	-20.08	14.54	10.40	2.23	H			0.187	22.71
		16-QAM	-20.84	13.78	10.40	2.23	H			0.157	21.95
		64-QAM	-21.92	12.70	10.40	2.23	H			0.122	20.87
		256-QAM	-25.13	9.49	10.40	2.23	H			0.058	17.66
1912.5		QPSK	-20.29	14.28	10.40	2.14	H			0.179	22.54
		16-QAM	-21.07	13.50	10.40	2.14	H			0.150	21.76
		64-QAM	-22.12	12.45	10.40	2.14	H			0.118	20.71
		256-QAM	-25.35	9.22	10.40	2.14	H			0.056	17.48

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1855.0	LTE B25/B2 10 MHz	QPSK	-19.37	14.59	10.40	2.15	H	< 2.00		0.192	22.84
		16-QAM	-20.08	13.88	10.40	2.15	H			0.163	22.13
		64-QAM	-21.17	12.79	10.40	2.15	H			0.127	21.04
		256-QAM	-24.26	9.70	10.40	2.15	H			0.062	17.95
1882.5		QPSK	-19.93	14.69	10.40	2.23	H			0.193	22.86
		16-QAM	-20.73	13.89	10.40	2.23	H			0.161	22.06
		64-QAM	-21.80	12.82	10.40	2.23	H			0.126	20.99
		256-QAM	-24.96	9.66	10.40	2.23	H			0.061	17.83
1910.0		QPSK	-20.21	14.36	10.40	2.14	H			0.183	22.62
		16-QAM	-20.98	13.59	10.40	2.14	H			0.153	21.85
		64-QAM	-22.09	12.48	10.40	2.14	H			0.119	20.74
		256-QAM	-25.26	9.31	10.40	2.14	H			0.057	17.57

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1857.5	LTE B25/B2 15 MHz	QPSK	-19.55	14.59	10.40	2.17	H	< 2.00	0.191	22.82	
		16-QAM	-20.21	13.93	10.40	2.17	H		0.164	22.16	
		64-QAM	-21.34	12.80	10.40	2.17	H		0.127	21.03	
		256-QAM	-24.44	9.70	10.40	2.17	H		0.062	17.93	
1882.5		QPSK	-20.02	14.60	10.40	2.23	H		0.189	22.77	
		16-QAM	-20.76	13.86	10.40	2.23	H		0.160	22.03	
		64-QAM	-21.81	12.81	10.40	2.23	H		0.125	20.98	
		256-QAM	-24.93	9.69	10.40	2.23	H		0.061	17.86	
1907.5		QPSK	-20.28	14.29	10.40	2.14	H		0.180	22.55	
		16-QAM	-21.17	13.40	10.40	2.14	H		0.147	21.66	
		64-QAM	-22.23	12.34	10.40	2.14	H		0.115	20.60	
		256-QAM	-25.33	9.24	10.40	2.14	H		0.056	17.50	

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W	W	dBm	dBm
1860.0	LTE B25/B2 20 MHz	QPSK	-19.49	14.65	10.40	2.17	H	< 2.00	0.194	22.88	
		16-QAM	-20.36	13.78	10.40	2.17	H		0.159	22.01	
		64-QAM	-21.39	12.75	10.40	2.17	H		0.125	20.98	
		256-QAM	-24.49	9.65	10.40	2.17	H		0.061	17.88	
1882.5		QPSK	-20.04	14.58	10.40	2.23	H		0.188	22.75	
		16-QAM	-20.62	14.00	10.40	2.23	H		0.165	22.17	
		64-QAM	-21.82	12.80	10.40	2.23	H		0.125	20.97	
		256-QAM	-24.88	9.74	10.40	2.23	H		0.062	17.91	
1905.0		QPSK	-20.19	14.39	10.40	2.16	H		0.183	22.63	
		16-QAM	-21.07	13.51	10.40	2.16	H		0.150	21.75	
		64-QAM	-22.10	12.48	10.40	2.16	H		0.118	20.72	
		256-QAM	-25.13	9.45	10.40	2.16	H		0.059	17.69	

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1850.7 MHz
- ▣ MEASURED OUTPUT POWER: 23.34 dBm = 0.216 W
- ▣ MOD: LTE B25/B2
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 36.34 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
26047 (1850.7)	3 701.40	-52.92	12.30	-57.59	3.09	H	-48.38	71.72
	5 552.10	-55.96	13.00	-54.10	3.85	H	-44.95	68.29
	7 402.80	-53.98	10.80	-43.73	4.56	H	-37.49	60.83
26365 (1882.5)	3 765.00	-53.78	12.33	-58.44	3.09	V	-49.19	72.54
	5 647.50	-56.34	13.10	-54.47	3.89	V	-45.26	68.60
	7 530.00	-55.27	10.86	-44.55	4.61	H	-38.30	61.64
26683 (1914.3)	3 828.60	-54.54	12.40	-59.08	3.21	V	-49.89	73.23
	5 742.90	-55.95	13.02	-53.16	3.90	H	-44.04	67.38
	7 657.20	-55.73	11.32	-45.48	4.65	H	-38.81	62.15

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
25/2	1.4 MHz	1882.5	QPSK	6	0	5.21
			16-QAM	6	0	5.98
			64-QAM	6	0	6.52
			256-QAM	6	0	6.87
	3 MHz		QPSK	15	0	5.19
			16-QAM	15	0	6.03
			64-QAM	15	0	6.51
			256-QAM	15	0	6.84
	5 MHz		QPSK	25	0	5.25
			16-QAM	25	0	6.05
			64-QAM	25	0	6.49
			256-QAM	25	0	6.85
	10 MHz		QPSK	50	0	5.34
			16-QAM	50	0	6.08
			64-QAM	50	0	6.47
			256-QAM	50	0	6.83
	15 MHz		QPSK	75	0	5.28
			16-QAM	75	0	6.07
			64-QAM	75	0	6.47
			256-QAM	75	0	6.82
20 MHz	QPSK	100	0	5.26		
	16-QAM	100	0	6.07		
	64-QAM	100	0	6.49		
	256-QAM	100	0	6.82		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 135 ~ 158.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
25/2	1.4 MHz	1882.5	QPSK	6	0	1.1013
			16-QAM	6	0	1.1013
			64-QAM	6	0	1.1004
			256-QAM	6	0	1.0992
	3 MHz		QPSK	15	0	2.7271
			16-QAM	15	0	2.7111
			64-QAM	15	0	2.7211
			256-QAM	15	0	2.7125
	5 MHz		QPSK	25	0	4.5115
			16-QAM	25	0	4.5168
			64-QAM	25	0	4.5216
			256-QAM	25	0	4.4940
	10 MHz		QPSK	50	0	8.9784
			16-QAM	50	0	8.9916
			64-QAM	50	0	9.0072
			256-QAM	50	0	9.0156
	15 MHz		QPSK	75	0	13.518
			16-QAM	75	0	13.501
			64-QAM	75	0	13.453
			256-QAM	75	0	13.468
20 MHz	QPSK	100	0	17.993		
	16-QAM	100	0	17.959		
	64-QAM	100	0	17.992		
	256-QAM	100	0	17.962		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 111 ~ 134.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
25/2	1.4	3.6790	3.6790	27.976	-77.268	-49.292	-13.00
		3.6790	3.6676	27.976	-77.271	-49.295	
		3.6780	3.7114	27.976	-77.190	-49.214	
	3	3.6815	3.6925	27.976	-77.118	-49.142	
		3.7114	3.6980	27.976	-77.371	-49.395	
		3.6885	3.6975	27.976	-77.344	-49.368	
	5	3.7194	3.7104	27.976	-76.918	-48.942	
		3.7114	3.6905	27.976	-77.221	-49.245	
		3.6850	3.6870	27.976	-76.915	-48.939	
	10	3.7189	3.6920	27.976	-77.074	-49.098	
		3.7044	3.6815	27.976	-77.376	-49.400	
		3.6785	3.6990	27.976	-77.165	-49.189	
	15	3.6910	3.7164	27.976	-77.374	-49.398	
		3.7039	3.6780	27.976	-77.151	-49.175	
		3.7044	3.6890	27.976	-77.308	-49.332	
	20	3.7169	3.7279	27.976	-77.368	-49.392	
		3.7124	3.1715	27.976	-77.389	-49.413	
		3.7005	3.6845	27.976	-77.131	-49.155	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 159 ~ 194.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 75 ~ 110.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 26047 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 700 003	0.0	0.000 000	0.000
100 %		-30	1850 700 006	3.2	0.000 000	0.002
100 %		-20	1850 700 006	2.5	0.000 000	0.001
100 %		-10	1850 700 001	-2.0	0.000 000	-0.001
100 %		0	1850 700 000	-3.2	0.000 000	-0.002
100 %		+10	1850 700 006	3.2	0.000 000	0.002
100 %		+30	1850 700 001	-2.0	0.000 000	-0.001
100 %		+40	1850 700 005	1.6	0.000 000	0.001
100 %		+50	1850 700 001	-2.0	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1850 700 006	2.6	0.000 000

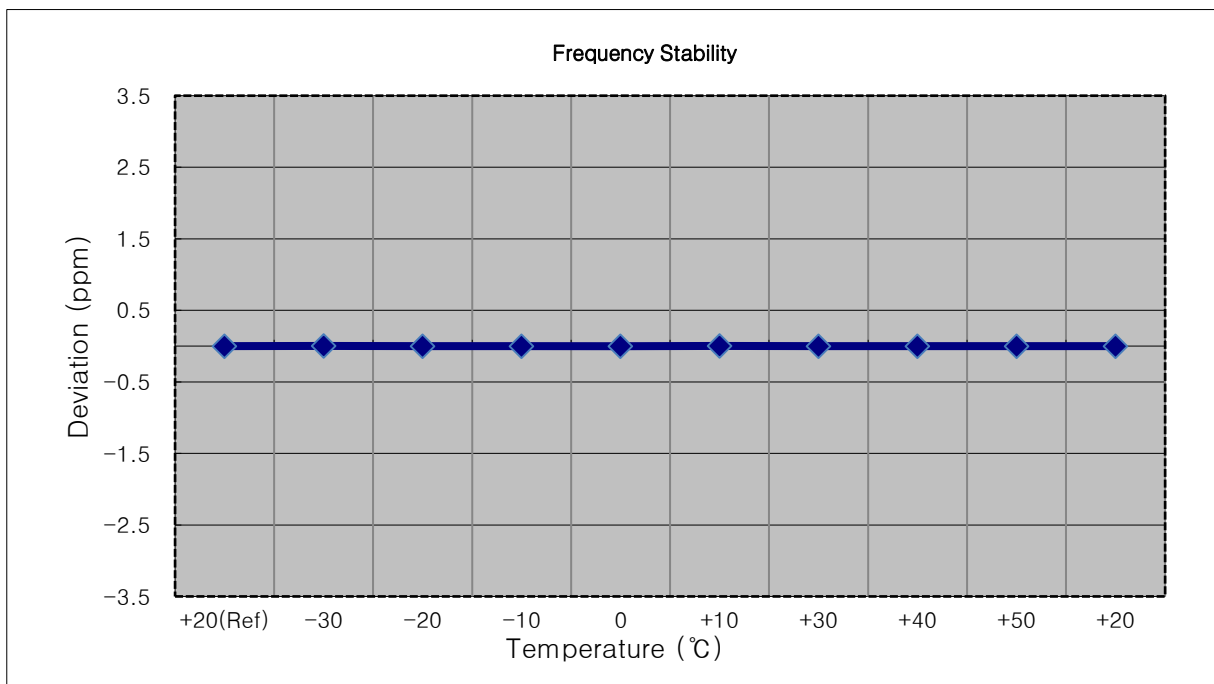


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 26055 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1851 500 002	0.0	0.000 000	0.000
100 %		-30	1851 499 998	-3.8	0.000 000	-0.002
100 %		-20	1851 499 999	-3.0	0.000 000	-0.002
100 %		-10	1851 499 998	-4.6	0.000 000	-0.002
100 %		0	1851 499 998	-4.0	0.000 000	-0.002
100 %		+10	1851 499 999	-2.8	0.000 000	-0.002
100 %		+30	1851 499 999	-2.9	0.000 000	-0.002
100 %		+40	1851 499 998	-4.5	0.000 000	-0.002
100 %		+50	1851 499 999	-3.0	0.000 000	-0.002
Batt. Endpoint	3.400	+20	1851 500 005	2.9	0.000 000	0.002

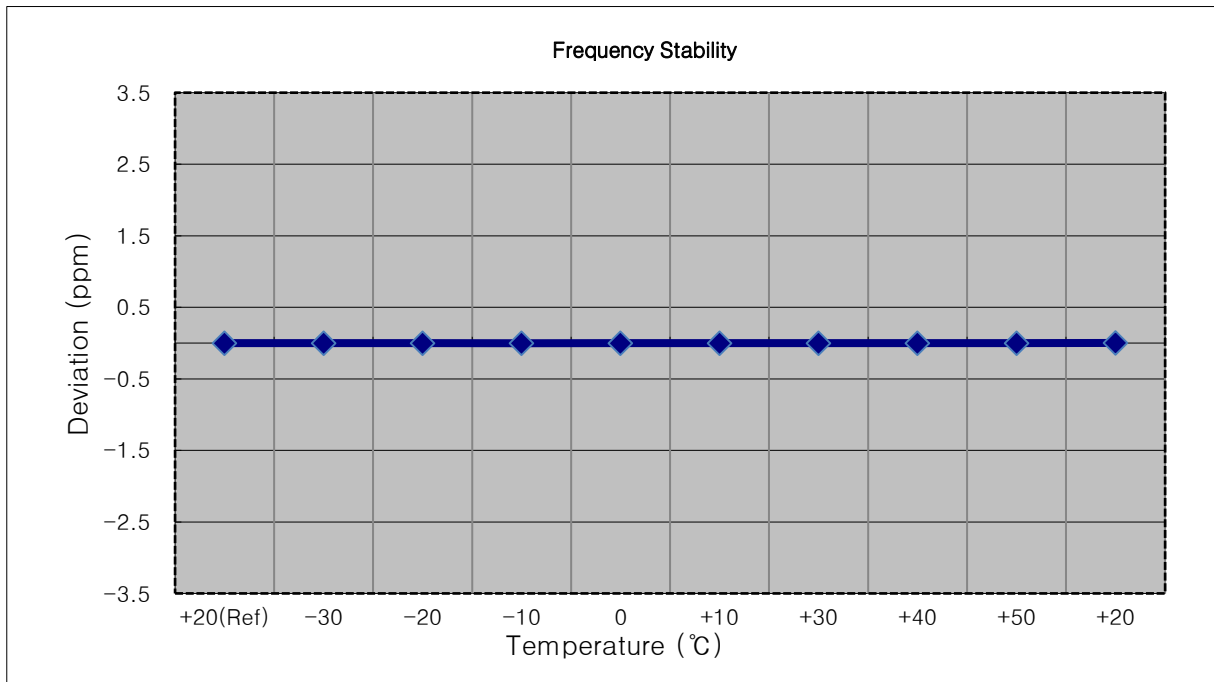


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 26065 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 500 003	0.0	0.000 000	0.000
100 %		-30	1852 499 998	-5.2	0.000 000	-0.003
100 %		-20	1852 500 006	2.8	0.000 000	0.002
100 %		-10	1852 500 000	-2.7	0.000 000	-0.001
100 %		0	1852 500 006	3.3	0.000 000	0.002
100 %		+10	1852 500 007	3.7	0.000 000	0.002
100 %		+30	1852 500 009	6.2	0.000 000	0.003
100 %		+40	1852 500 007	3.5	0.000 000	0.002
100 %		+50	1852 500 008	4.8	0.000 000	0.003
Batt. Endpoint	3.400	+20	1852 500 007	3.4	0.000 000	0.002

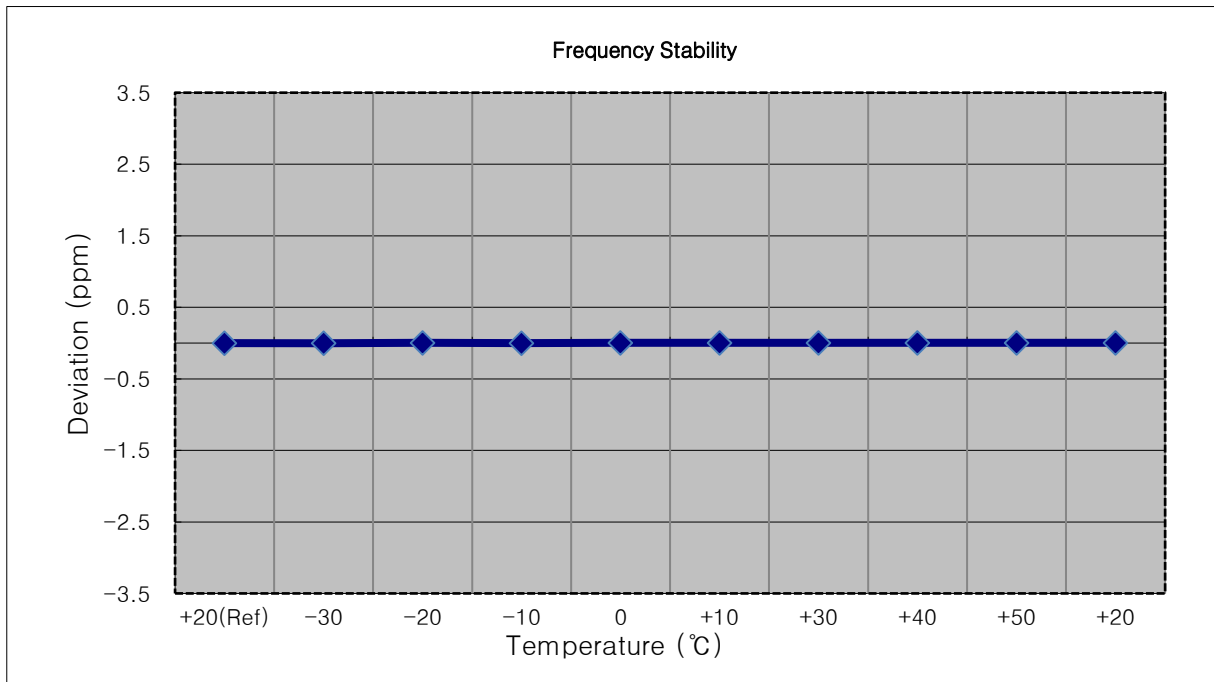


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 26090 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1854 999 996	0.0	0.000 000	0.000
100 %		-30	1854 999 993	-3.8	0.000 000	-0.002
100 %		-20	1854 999 992	-4.4	0.000 000	-0.002
100 %		-10	1854 999 999	2.8	0.000 000	0.002
100 %		0	1855 000 000	3.7	0.000 000	0.002
100 %		+10	1854 999 993	-3.0	0.000 000	-0.002
100 %		+30	1854 999 999	2.4	0.000 000	0.001
100 %		+40	1854 999 992	-4.0	0.000 000	-0.002
100 %		+50	1854 999 992	-4.8	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1855 000 000	3.8	0.000 000

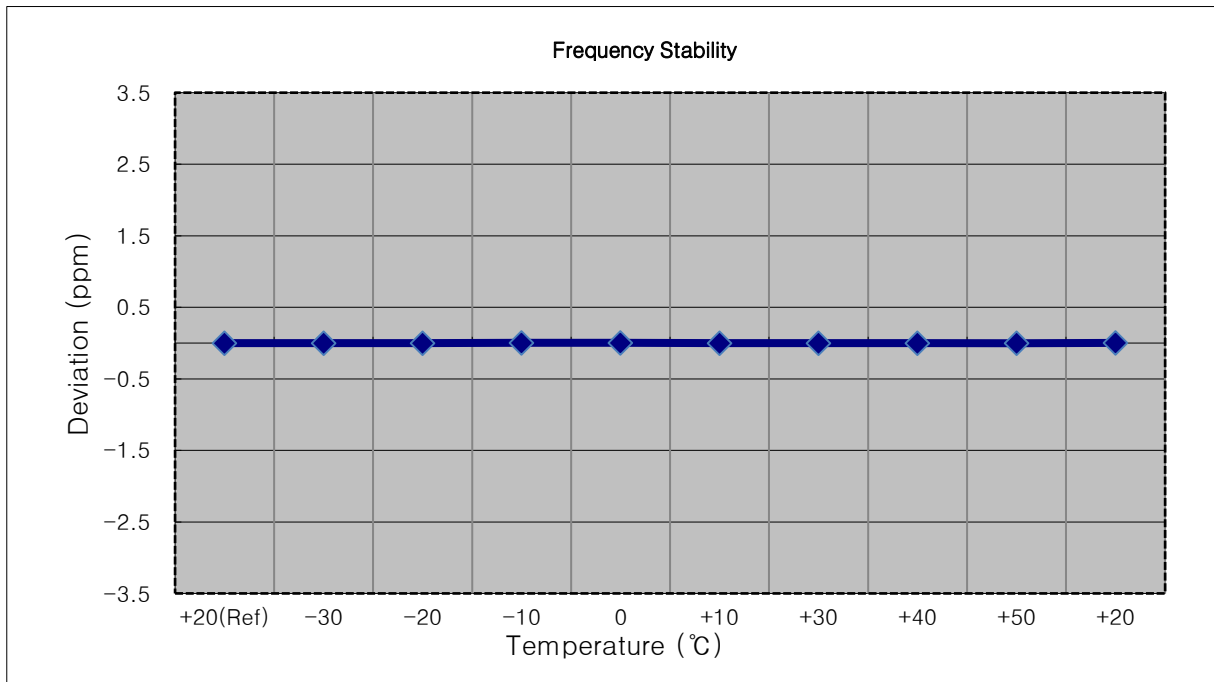


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 26115 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1857 499 995	0.0	0.000 000	0.000
100 %		-30	1857 499 992	-3.0	0.000 000	-0.002
100 %		-20	1857 499 992	-2.2	0.000 000	-0.001
100 %		-10	1857 499 991	-3.6	0.000 000	-0.002
100 %		0	1857 499 990	-4.8	0.000 000	-0.003
100 %		+10	1857 499 992	-2.6	0.000 000	-0.001
100 %		+30	1857 499 997	2.7	0.000 000	0.001
100 %		+40	1857 499 991	-3.3	0.000 000	-0.002
100 %		+50	1857 499 993	-1.5	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1857 499 998	3.0	0.000 000

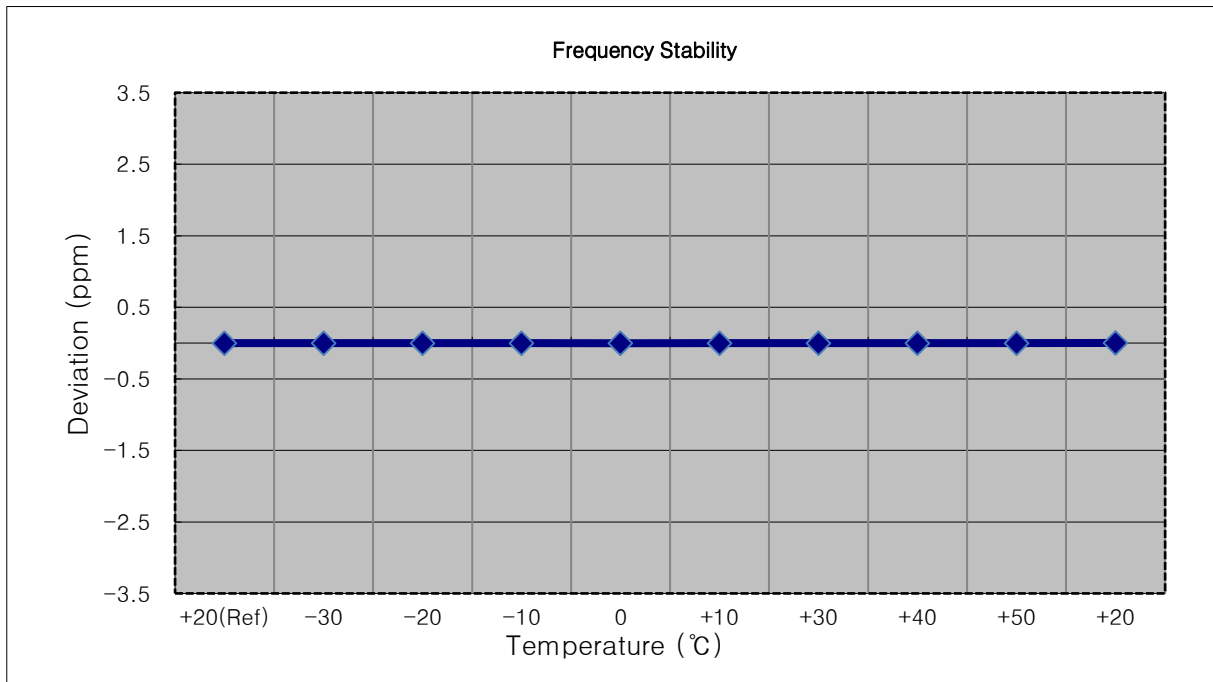


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 26140 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1860 000 005	0.0	0.000 000	0.000
100 %		-30	1860 000 011	6.0	0.000 000	0.003
100 %		-20	1860 000 012	6.5	0.000 000	0.003
100 %		-10	1860 000 009	3.7	0.000 000	0.002
100 %		0	1860 000 011	5.3	0.000 000	0.003
100 %		+10	1860 000 010	5.1	0.000 000	0.003
100 %		+30	1860 000 011	5.8	0.000 000	0.003
100 %		+40	1860 000 012	6.7	0.000 000	0.004
100 %		+50	1860 000 012	6.9	0.000 000	0.004
Batt. Endpoint		3.400	+20	1860 000 011	5.5	0.000 000

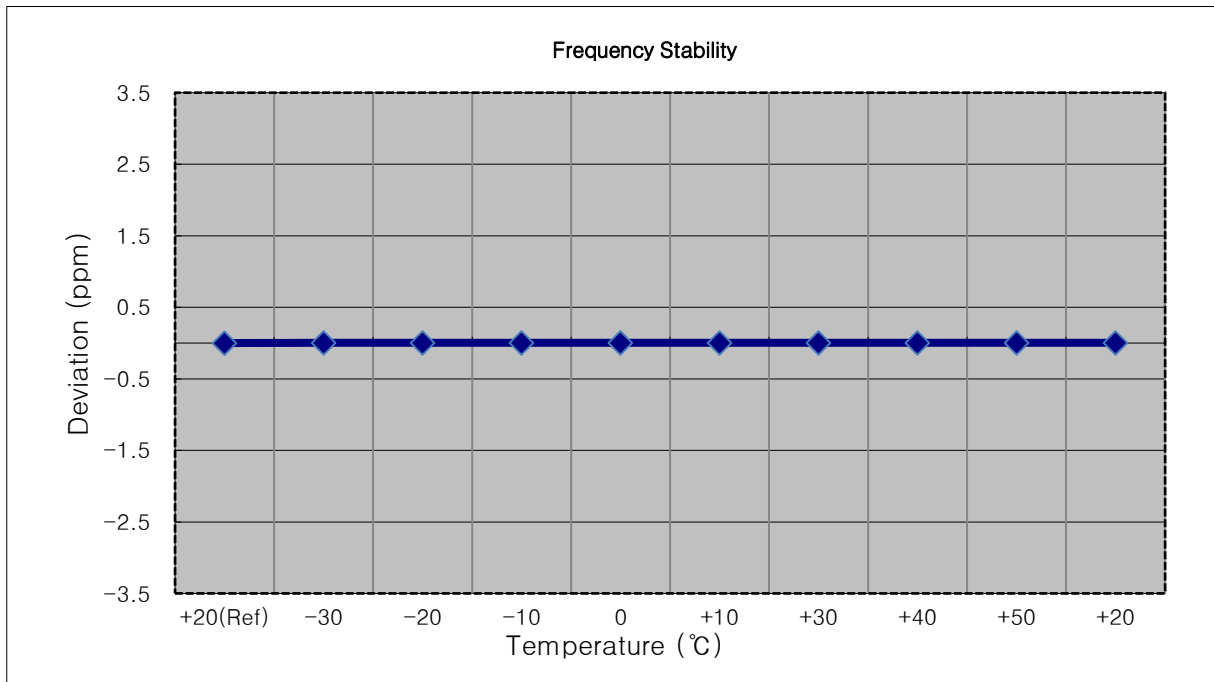


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 004	0.0	0.000 000	0.000
100 %		-30	1882 500 008	4.4	0.000 000	0.002
100 %		-20	1882 500 007	3.0	0.000 000	0.002
100 %		-10	1882 500 009	5.0	0.000 000	0.003
100 %		0	1882 500 007	3.0	0.000 000	0.002
100 %		+10	1882 500 007	3.2	0.000 000	0.002
100 %		+30	1882 500 008	3.9	0.000 000	0.002
100 %		+40	1882 500 007	3.5	0.000 000	0.002
100 %		+50	1882 500 002	-2.2	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1882 500 006	2.4	0.000 000

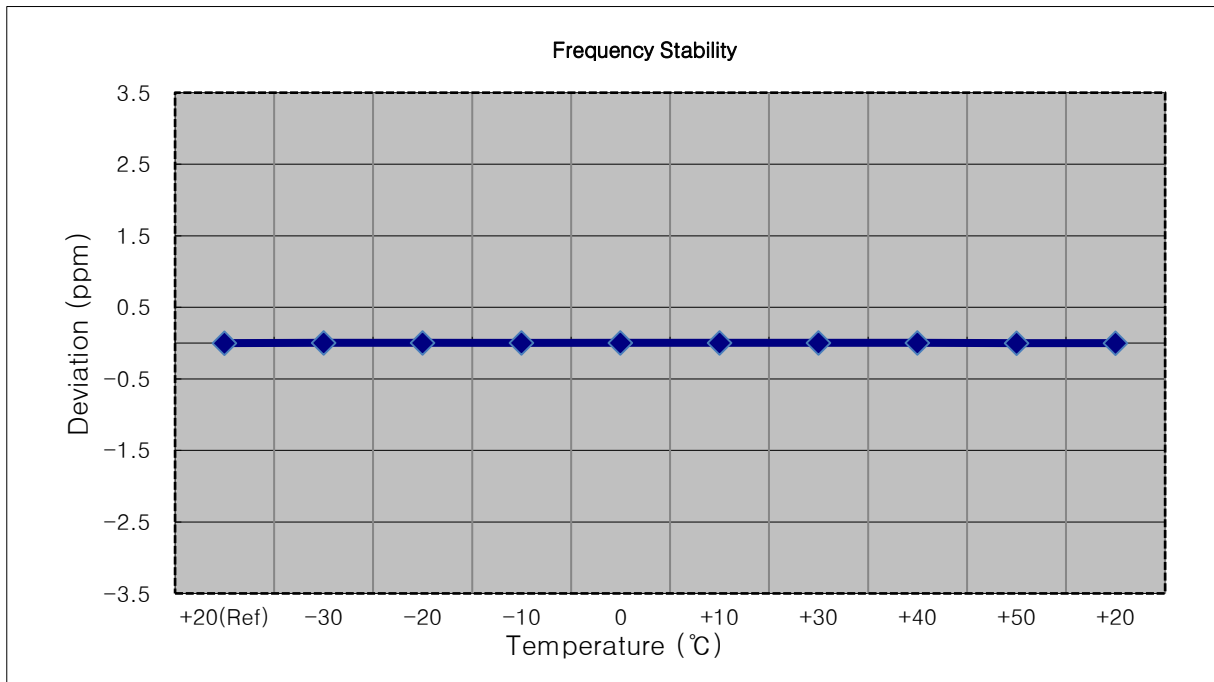


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 499 996	0.0	0.000 000	0.000
100 %		-30	1882 499 991	-4.2	0.000 000	-0.002
100 %		-20	1882 499 991	-4.1	0.000 000	-0.002
100 %		-10	1882 499 993	-2.2	0.000 000	-0.001
100 %		0	1882 500 000	4.2	0.000 000	0.002
100 %		+10	1882 499 989	-6.6	0.000 000	-0.004
100 %		+30	1882 499 991	-4.5	0.000 000	-0.002
100 %		+40	1882 499 992	-3.5	0.000 000	-0.002
100 %		+50	1882 499 993	-2.9	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1882 500 003	7.6	0.000 000

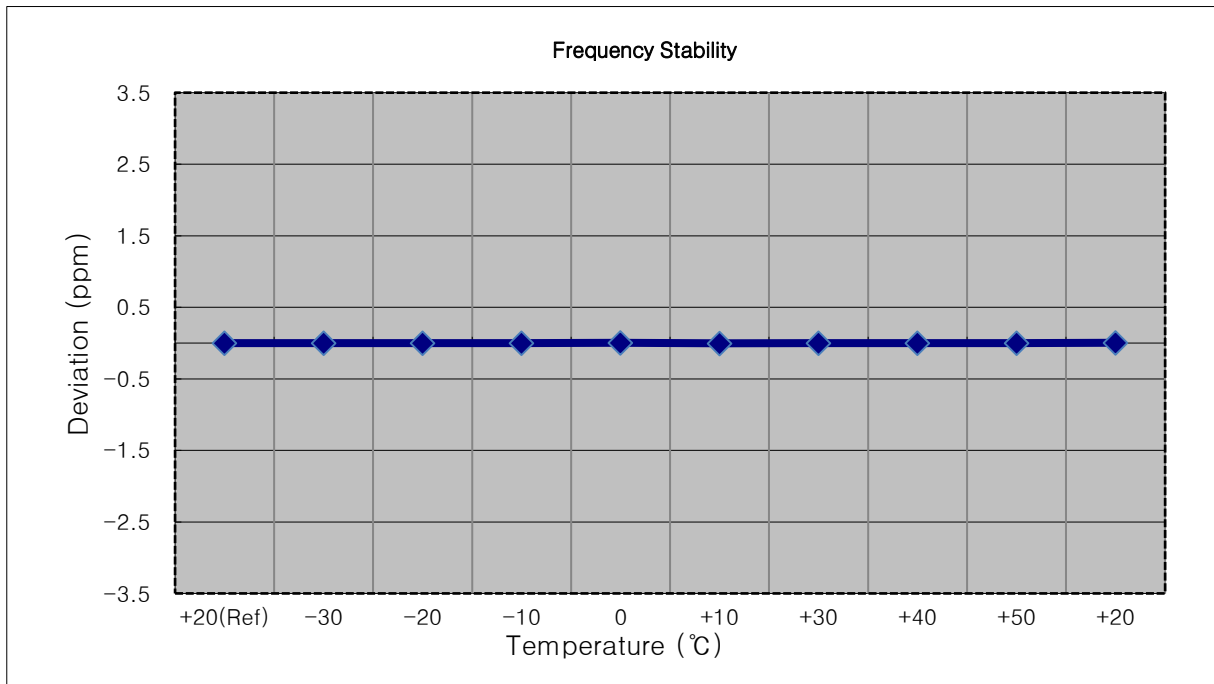


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 002	0.0	0.000 000	0.000
100 %		-30	1882 500 006	4.3	0.000 000	0.002
100 %		-20	1882 499 999	-3.6	0.000 000	-0.002
100 %		-10	1882 500 008	5.9	0.000 000	0.003
100 %		0	1882 500 005	3.0	0.000 000	0.002
100 %		+10	1882 500 006	3.7	0.000 000	0.002
100 %		+30	1882 499 998	-4.2	0.000 000	-0.002
100 %		+40	1882 500 008	5.4	0.000 000	0.003
100 %		+50	1882 500 008	5.6	0.000 000	0.003
Batt. Endpoint		3.400	+20	1882 500 007	4.6	0.000 000

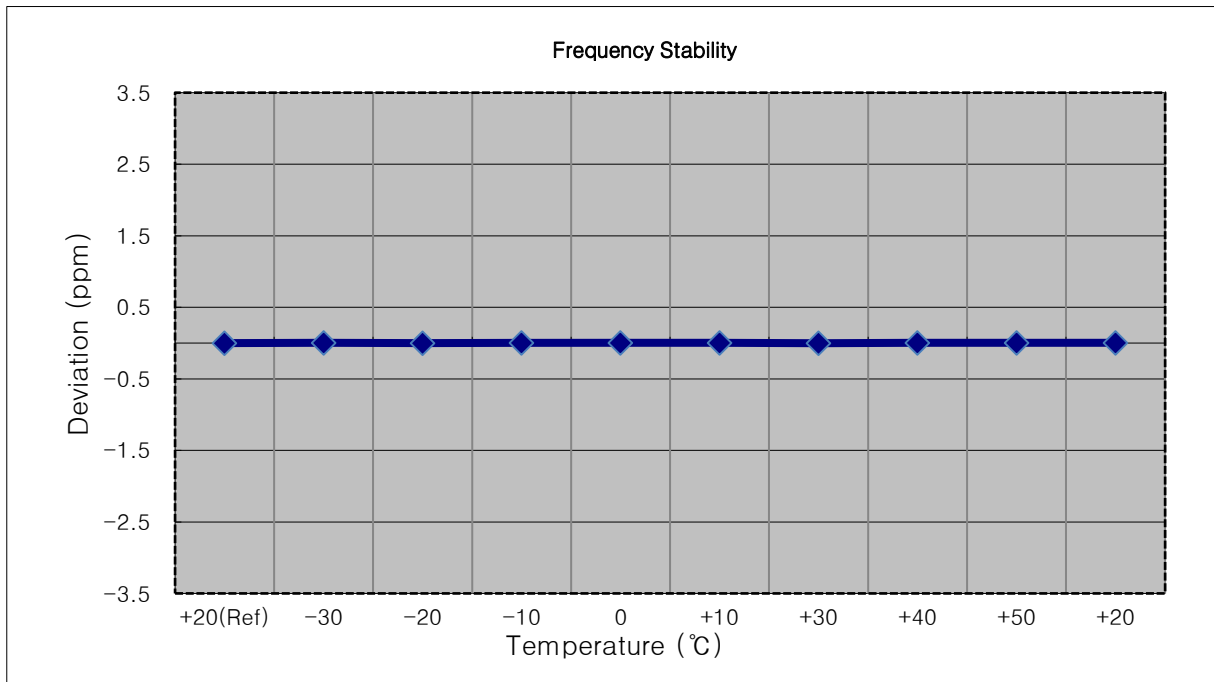


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 005	0.0	0.000 000	0.000
100 %		-30	1882 499 999	-6.0	0.000 000	-0.003
100 %		-20	1882 500 000	-4.2	0.000 000	-0.002
100 %		-10	1882 500 002	-2.6	0.000 000	-0.001
100 %		0	1882 500 000	-4.8	0.000 000	-0.003
100 %		+10	1882 500 000	-5.0	0.000 000	-0.003
100 %		+30	1882 499 996	-8.3	0.000 000	-0.004
100 %		+40	1882 500 001	-4.0	0.000 000	-0.002
100 %		+50	1882 499 999	-6.0	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1882 500 002	-2.8	0.000 000

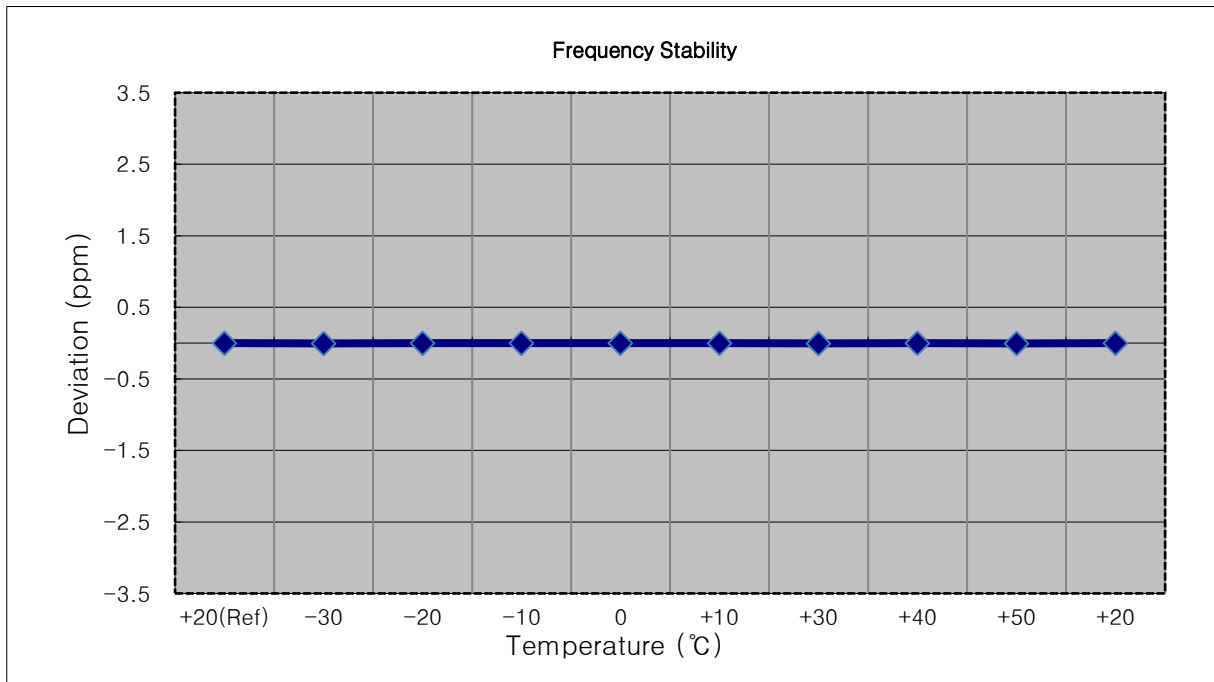


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 003	0.0	0.000 000	0.000
100 %		-30	1882 500 010	6.1	0.000 000	0.003
100 %		-20	1882 500 009	5.4	0.000 000	0.003
100 %		-10	1882 500 006	3.0	0.000 000	0.002
100 %		0	1882 500 006	2.9	0.000 000	0.002
100 %		+10	1882 500 009	5.2	0.000 000	0.003
100 %		+30	1882 500 009	5.4	0.000 000	0.003
100 %		+40	1882 500 010	6.9	0.000 000	0.004
100 %		+50	1882 500 007	3.9	0.000 000	0.002
Batt. Endpoint		3.400	+20	1882 500 007	3.9	0.000 000

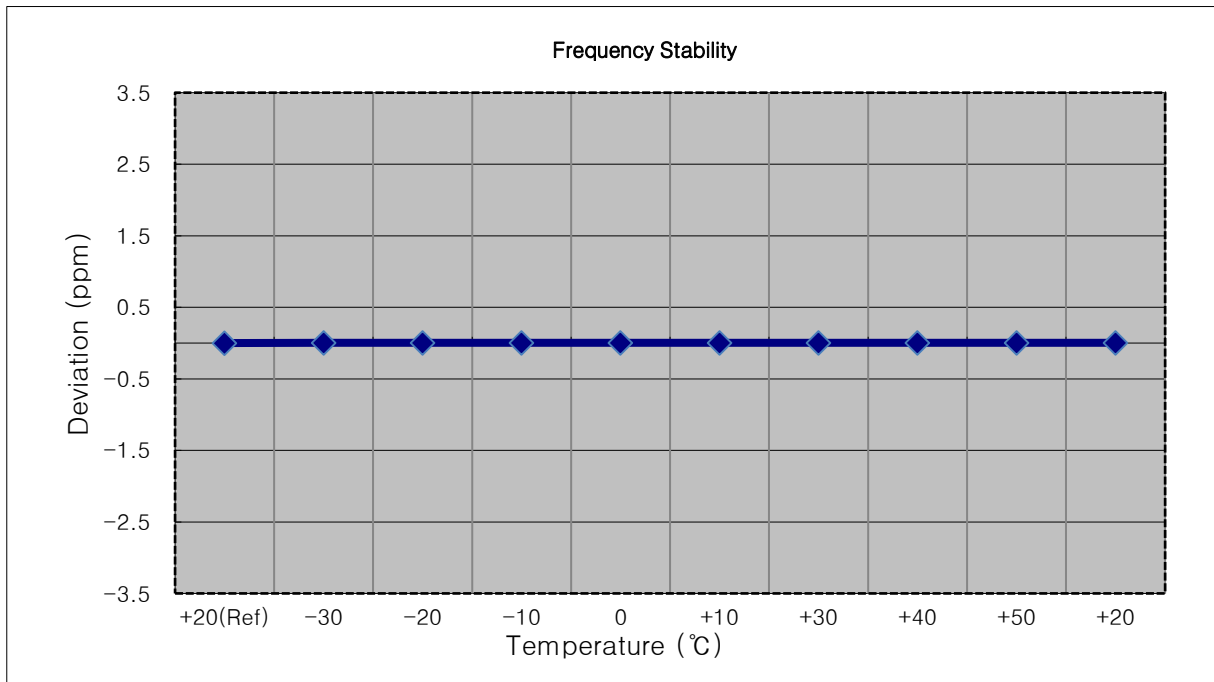


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 004	0.0	0.000 000	0.000
100 %		-30	1882 500 008	3.9	0.000 000	0.002
100 %		-20	1882 500 009	4.9	0.000 000	0.003
100 %		-10	1882 500 009	5.0	0.000 000	0.003
100 %		0	1882 500 007	3.0	0.000 000	0.002
100 %		+10	1882 500 010	6.3	0.000 000	0.003
100 %		+30	1882 500 010	5.8	0.000 000	0.003
100 %		+40	1882 500 009	4.7	0.000 000	0.002
100 %		+50	1882 500 009	4.9	0.000 000	0.003
Batt. Endpoint		3.400	+20	1882 500 010	5.8	0.000 000

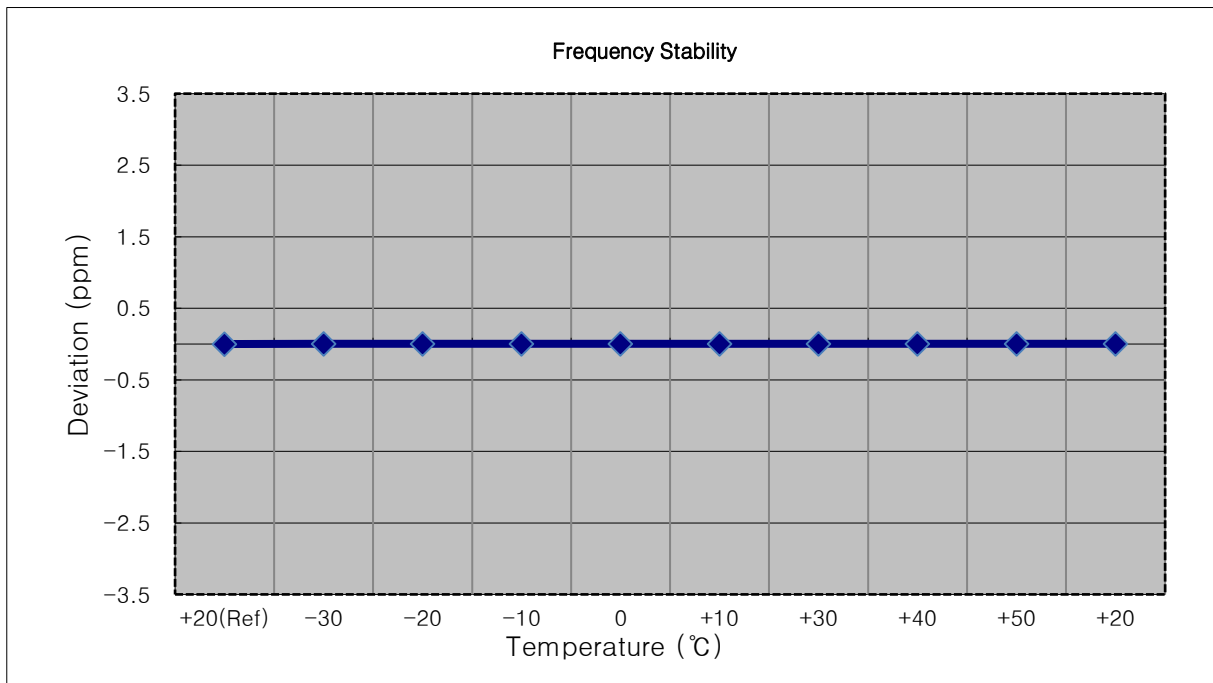


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1914,300,000 Hz
- ▣ CHANNEL: 26683 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1914 300 006	0.0	0.000 000	0.000
100 %		-30	1914 300 010	3.3	0.000 000	0.002
100 %		-20	1914 300 013	6.2	0.000 000	0.003
100 %		-10	1914 300 003	-3.9	0.000 000	-0.002
100 %		0	1914 300 013	6.3	0.000 000	0.003
100 %		+10	1914 300 012	5.9	0.000 000	0.003
100 %		+30	1914 300 012	5.4	0.000 000	0.003
100 %		+40	1914 300 004	-2.8	0.000 000	-0.001
100 %		+50	1914 300 014	7.3	0.000 000	0.004
Batt. Endpoint		3.400	+20	1914 300 005	-1.9	0.000 000

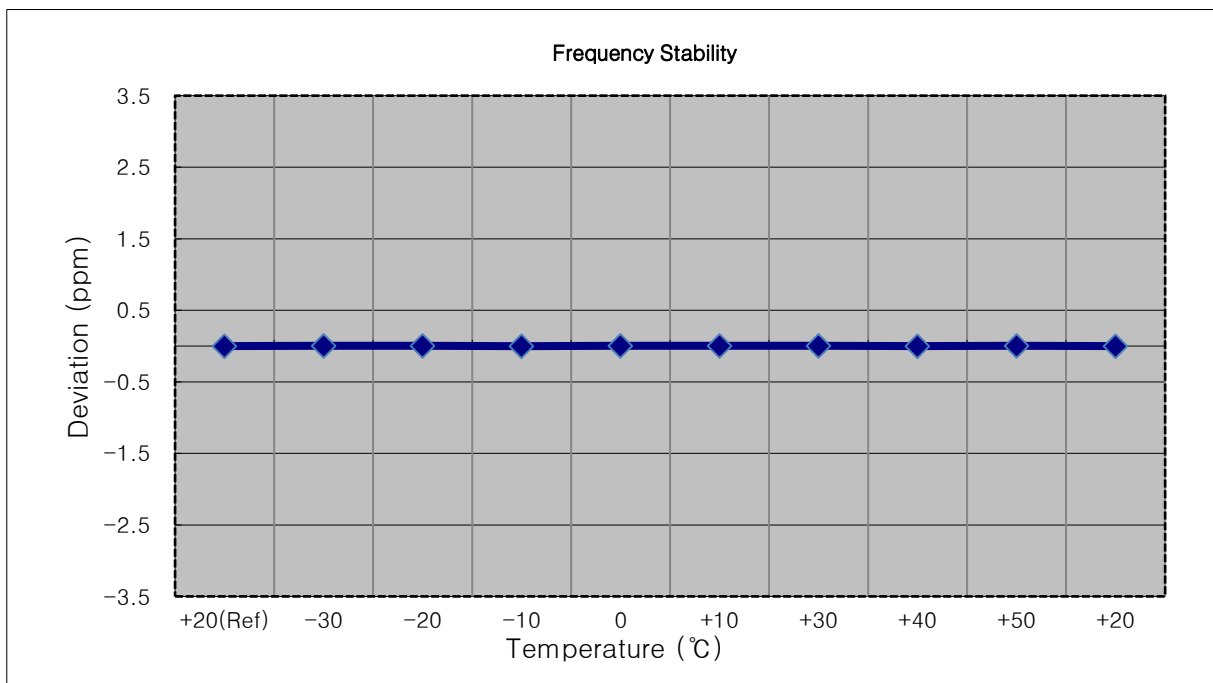


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1913,500,000 Hz
- ▣ CHANNEL: 26675 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1913 500 018	0.0	0.000 000	0.000
100 %		-30	1913 500 011	-6.9	0.000 000	-0.004
100 %		-20	1913 500 007	-10.7	-0.000 001	-0.006
100 %		-10	1913 500 030	12.3	0.000 001	0.006
100 %		0	1913 500 028	10.3	0.000 001	0.005
100 %		+10	1913 500 007	-10.7	-0.000 001	-0.006
100 %		+30	1913 500 005	-12.6	-0.000 001	-0.007
100 %		+40	1913 500 005	-13.0	-0.000 001	-0.007
100 %		+50	1913 500 009	-9.2	0.000 000	-0.005
Batt. Endpoint		3.400	+20	1913 500 024	6.2	0.000 000

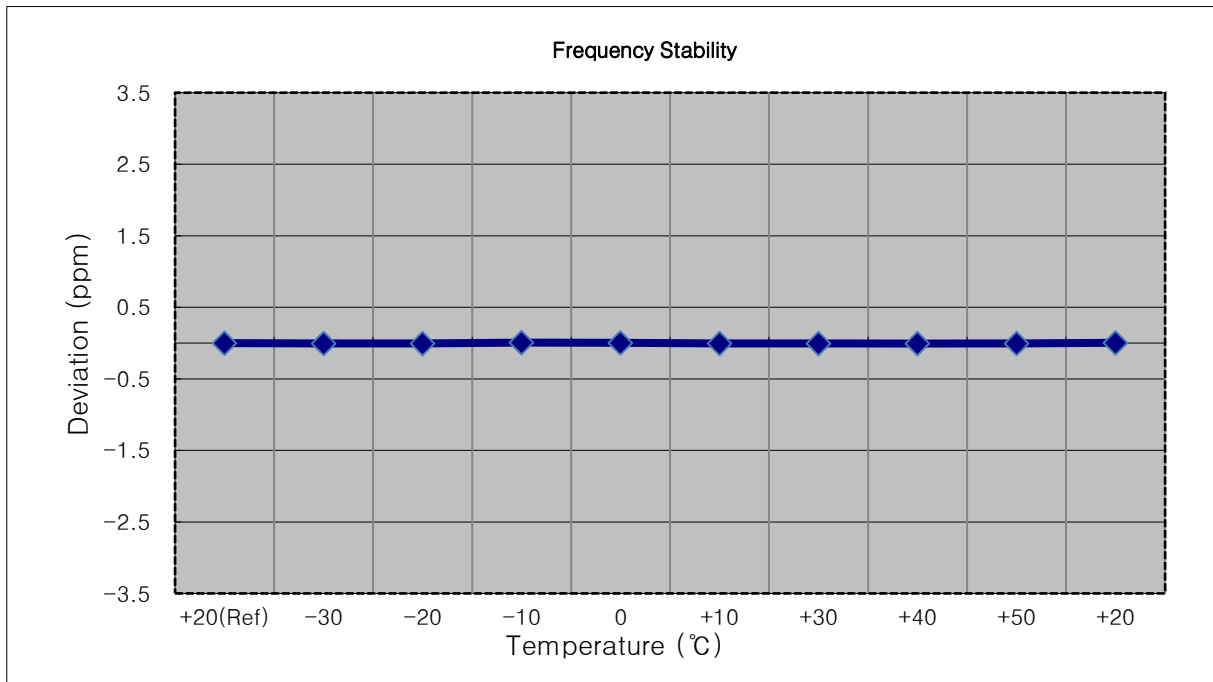


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1912,500,000 Hz
- ▣ CHANNEL: 26665 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1912 499 993	0.0	0.000 000	0.000
100 %		-30	1912 499 986	-6.2	0.000 000	-0.003
100 %		-20	1912 499 985	-7.8	0.000 000	-0.004
100 %		-10	1912 499 987	-5.7	0.000 000	-0.003
100 %		0	1912 499 985	-7.5	0.000 000	-0.004
100 %		+10	1912 499 984	-8.2	0.000 000	-0.004
100 %		+30	1912 499 987	-6.1	0.000 000	-0.003
100 %		+40	1912 499 986	-6.6	0.000 000	-0.003
100 %		+50	1912 499 983	-9.3	0.000 000	-0.005
Batt. Endpoint		3.400	+20	1912 499 988	-4.4	0.000 000

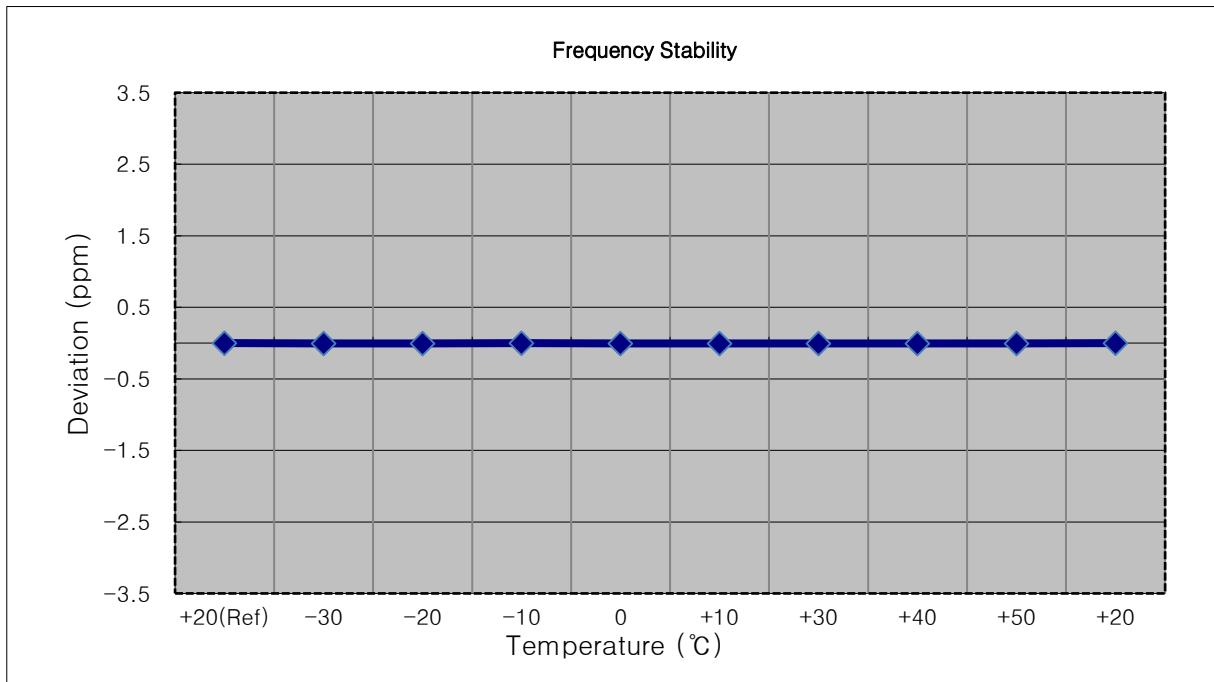


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1910,000,000 Hz
- ▣ CHANNEL: 26640 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1909 999 994	0.0	0.000 000	0.000
100 %		-30	1909 999 986	-8.0	0.000 000	-0.004
100 %		-20	1909 999 987	-7.5	0.000 000	-0.004
100 %		-10	1909 999 988	-6.6	0.000 000	-0.003
100 %		0	1909 999 991	-3.5	0.000 000	-0.002
100 %		+10	1909 999 986	-8.7	0.000 000	-0.005
100 %		+30	1909 999 989	-5.3	0.000 000	-0.003
100 %		+40	1909 999 990	-4.4	0.000 000	-0.002
100 %		+50	1909 999 989	-5.4	0.000 000	-0.003
Batt. Endpoint		3.400	+20	1909 999 985	-8.8	0.000 000

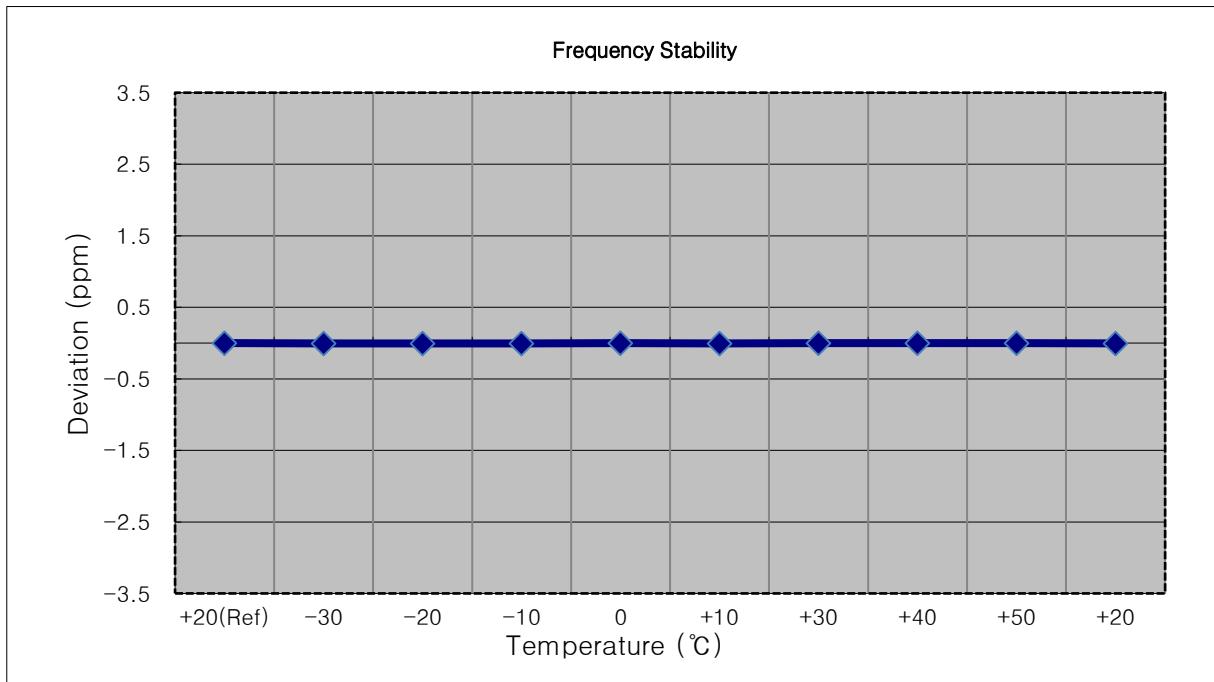


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 26615 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 499 992	0.0	0.000 000	0.000
100 %		-30	1907 499 985	-6.9	0.000 000	-0.004
100 %		-20	1907 499 984	-7.7	0.000 000	-0.004
100 %		-10	1907 499 984	-7.4	0.000 000	-0.004
100 %		0	1907 499 983	-8.6	0.000 000	-0.005
100 %		+10	1907 499 984	-8.0	0.000 000	-0.004
100 %		+30	1907 499 985	-7.1	0.000 000	-0.004
100 %		+40	1907 499 985	-7.2	0.000 000	-0.004
100 %		+50	1907 499 984	-7.6	0.000 000	-0.004
Batt. Endpoint		3.400	+20	1907 499 984	-8.2	0.000 000

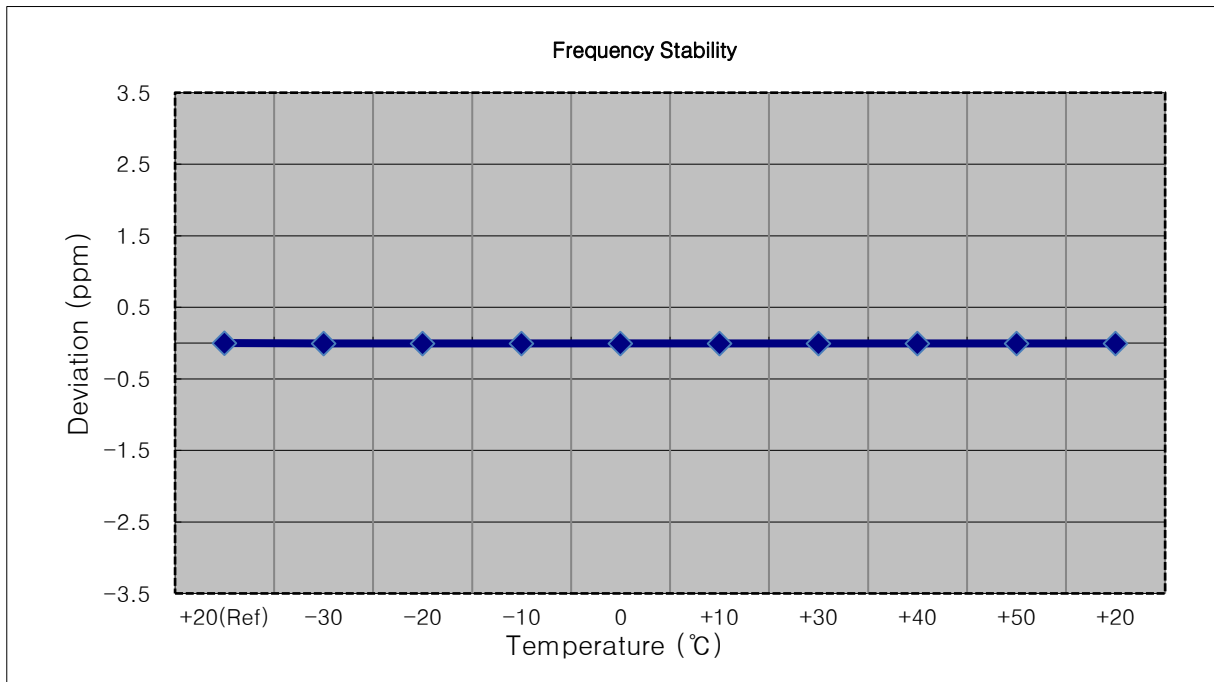

- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 26590 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1904 999 992	0.0	0.000 000	0.000
100 %		-30	1904 999 983	-8.7	0.000 000	-0.005
100 %		-20	1904 999 984	-8.5	0.000 000	-0.004
100 %		-10	1904 999 983	-9.6	-0.000 001	-0.005
100 %		0	1904 999 982	-9.8	-0.000 001	-0.005
100 %		+10	1904 999 983	-9.6	-0.000 001	-0.005
100 %		+30	1904 999 982	-10.0	-0.000 001	-0.005
100 %		+40	1904 999 982	-9.8	-0.000 001	-0.005
100 %		+50	1904 999 984	-8.6	0.000 000	-0.005
Batt. Endpoint		3.400	+20	1904 999 982	-9.8	-0.000 001

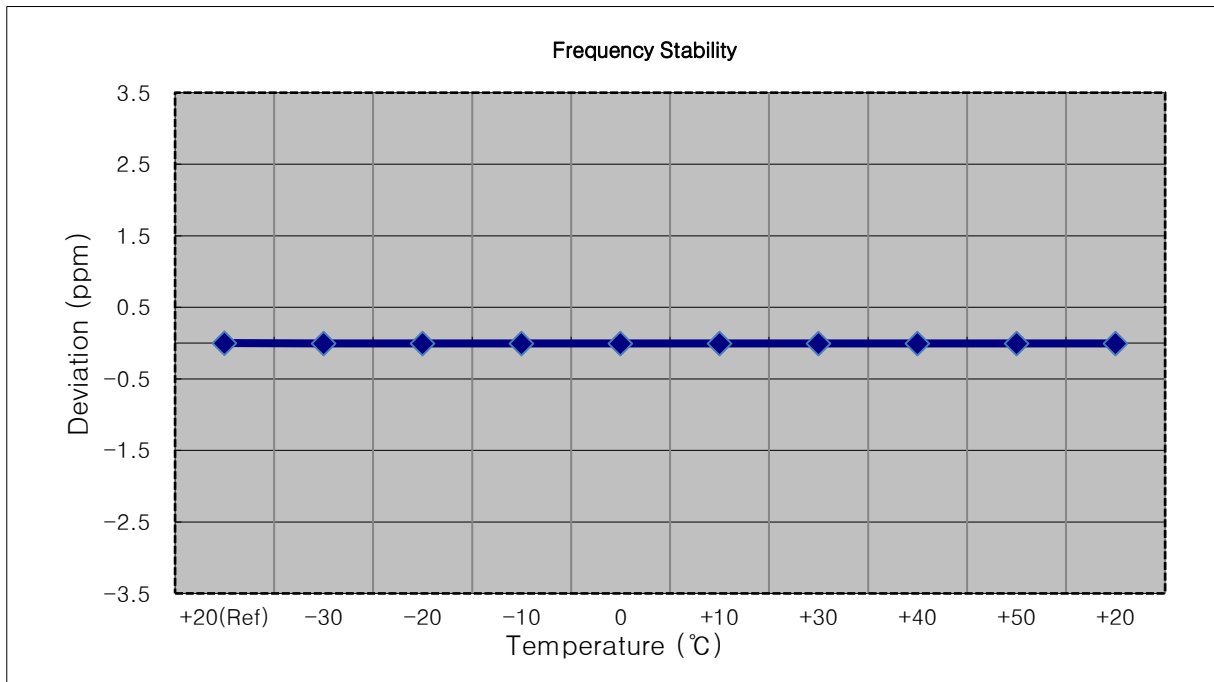

9. TEST DATA (Sub 2 Ant)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
1850.7	LTE B25/B2 1.4 MHz	QPSK	-20.28	13.54	10.00	2.12	H	< 2.00	0.139	21.42	1	6
		16-QAM	-21.31	12.51	10.00	2.12	H		0.109	20.39		
		64-QAM	-22.19	11.63	10.00	2.12	H		0.089	19.51		
		256-QAM	-25.15	8.67	10.00	2.12	H		0.045	16.55		
1882.5		QPSK	-20.89	12.71	10.00	2.21	H		0.112	20.50	1	0
		16-QAM	-21.90	11.70	10.00	2.21	H		0.089	19.49		
		64-QAM	-22.79	10.81	10.00	2.21	H		0.072	18.60		
		256-QAM	-25.74	7.86	10.00	2.21	H		0.037	15.65		
1914.3		QPSK	-22.44	11.71	10.01	2.12	H		0.091	19.60	1	0
		16-QAM	-23.46	10.69	10.01	2.12	H		0.072	18.58		
		64-QAM	-24.29	9.86	10.01	2.12	H		0.060	17.75		
		256-QAM	-27.23	6.92	10.01	2.12	H		0.030	14.81		

Freq (MHz)	Bandwidth	Modulation	Measured	Substitute	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
			Level (dBm)	Level (dBm)				W	W	dBm	Size	Offset
1851.5	LTE B25/B2 3 MHz	QPSK	-20.03	13.79	10.00	2.12	H	< 2.00	0.150	21.77	1	14
		16-QAM	-21.04	12.78	10.00	2.12	H		0.119	20.76		
		64-QAM	-21.91	11.91	10.00	2.12	H		0.098	19.89		
		256-QAM	-24.84	8.98	10.00	2.12	H		0.050	16.96		
1882.5		QPSK	-20.77	12.83	10.00	2.21	H		0.115	20.62	1	0
		16-QAM	-21.80	11.80	10.00	2.21	H		0.091	19.59		
		64-QAM	-22.71	10.89	10.00	2.21	H		0.074	18.68		
		256-QAM	-25.68	7.92	10.00	2.21	H		0.037	15.71		
1913.5		QPSK	-22.31	11.94	10.00	2.21	H		0.094	19.73	1	0
		16-QAM	-23.40	10.85	10.00	2.21	H		0.073	18.64		
		64-QAM	-24.32	9.93	10.00	2.21	H		0.059	17.72		
		256-QAM	-27.32	6.93	10.00	2.21	H		0.030	14.72		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1852.5	LTE B25/B2 5 MHz	QPSK	-20.03	13.79	10.00	2.12	H	< 2.00	0.147	21.67	1	24
		16-QAM	-21.04	12.78	10.00	2.12	H		0.116	20.66		
		64-QAM	-21.88	11.94	10.00	2.12	H		0.096	19.82		
		256-QAM	-24.73	9.09	10.00	2.12	H		0.050	16.97		
1882.5		QPSK	-20.76	12.84	10.00	2.21	H		0.116	20.63	1	0
		16-QAM	-21.80	11.80	10.00	2.21	H		0.091	19.59		
		64-QAM	-22.70	10.90	10.00	2.21	H		0.074	18.69		
		256-QAM	-25.65	7.95	10.00	2.21	H		0.038	15.74		
1912.5		QPSK	-21.90	12.12	10.01	2.11	H		0.101	20.02	1	0
		16-QAM	-22.95	11.07	10.01	2.11	H		0.079	18.97		
		64-QAM	-23.82	10.20	10.01	2.11	H		0.065	18.10		
		256-QAM	-26.52	7.50	10.01	2.11	H		0.035	15.40		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1855.0	LTE B25/B2 10 MHz	QPSK	-19.70	13.89	10.00	2.15	H	< 2.00	0.149	21.74	1	49
		16-QAM	-20.73	12.86	10.00	2.15	H		0.118	20.71		
		64-QAM	-21.58	12.01	10.00	2.15	H		0.097	19.86		
		256-QAM	-24.49	9.10	10.00	2.15	H		0.050	16.95		
1882.5		QPSK	-20.63	12.97	10.00	2.21	H		0.119	20.76	1	0
		16-QAM	-21.66	11.94	10.00	2.21	H		0.094	19.73		
		64-QAM	-22.54	11.06	10.00	2.21	H		0.077	18.85		
		256-QAM	-25.45	8.15	10.00	2.21	H		0.039	15.94		
1910.0		QPSK	-21.75	12.27	10.01	2.11	H		0.104	20.17	1	0
		16-QAM	-22.70	11.32	10.01	2.11	H		0.084	19.22		
		64-QAM	-23.47	10.55	10.01	2.11	H		0.070	18.45		
		256-QAM	-25.79	8.23	10.01	2.11	H		0.041	16.13		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1857.5	LTE B25/B2 15 MHz	QPSK	-19.88	13.46	10.00	2.17	H	< 2.00	0.135	21.29	1	74
		16-QAM	-20.93	12.41	10.00	2.17	H		0.106	20.24		
		64-QAM	-21.86	11.48	10.00	2.17	H		0.085	19.31		
		256-QAM	-24.87	8.47	10.00	2.17	H		0.043	16.30		
1882.5		QPSK	-20.87	12.73	10.00	2.21	H		0.113	20.52	1	0
		16-QAM	-21.93	11.67	10.00	2.21	H		0.088	19.46		
		64-QAM	-22.87	10.73	10.00	2.21	H		0.071	18.52		
		256-QAM	-25.72	7.88	10.00	2.21	H		0.037	15.67		
1907.5		QPSK	-21.48	12.54	10.01	2.11	H		0.111	20.44	1	0
		16-QAM	-22.49	11.53	10.01	2.11	H		0.088	19.43		
		64-QAM	-23.40	10.62	10.01	2.11	H		0.071	18.52		
		256-QAM	-26.05	7.97	10.01	2.11	H		0.039	15.87		

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1860.0	LTE B25/B2 20 MHz	QPSK	-20.08	13.26	10.00	2.17	H	< 2.00	0.129	21.09	1	99
		16-QAM	-21.13	12.21	10.00	2.17	H		0.101	20.04		
		64-QAM	-22.09	11.25	10.00	2.17	H		0.081	19.08		
		256-QAM	-25.04	8.30	10.00	2.17	H		0.041	16.13		
1882.5		QPSK	-20.84	12.76	10.00	2.21	H		0.114	20.55	1	0
		16-QAM	-21.89	11.71	10.00	2.21	H		0.089	19.50		
		64-QAM	-22.84	10.76	10.00	2.21	H		0.072	18.55		
		256-QAM	-25.77	7.83	10.00	2.21	H		0.037	15.62		
1905.0		QPSK	-21.77	12.20	10.01	2.13	H		0.102	20.08	1	0
		16-QAM	-22.84	11.13	10.01	2.13	H		0.080	19.01		
		64-QAM	-23.83	10.14	10.01	2.13	H		0.063	18.02		
		256-QAM	-26.67	7.30	10.01	2.13	H		0.033	15.18		

9.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 1851.5 MHz
- ▣ MEASURED OUTPUT POWER: 21.77 dBm = 0.150 W
- ▣ MOD: LTE B25/B2
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 34.67 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
26055 (1851.5)	3 703.00	-60.12	11.40	-61.00	3.07	H	-52.67	74.34	1	14
	5 554.50	-59.90	11.80	-54.28	3.79	H	-46.27	67.94		
	7 406.00	-63.12	10.80	-48.46	4.47	H	-42.13	63.80		
	9 257.50	-62.37	10.80	-47.87	5.13	H	-42.20	63.87		
	11 109.00	-64.37	11.30	-45.79	5.60	H	-40.09	61.76		
26365 (1882.5)	3 765.00	-59.98	11.30	-60.05	3.09	V	-51.84	73.51	1	0
	5 647.50	-60.82	11.85	-55.40	3.89	H	-47.44	69.11		
	7 530.00	-64.86	11.10	-50.39	4.50	V	-43.79	65.46		
	9 412.50	-62.90	10.80	-47.57	5.07	V	-41.84	63.51		
	11 295.00	-64.84	11.35	-46.51	5.64	V	-40.80	62.47		
26675 (1913.5)	3 827.00	-61.85	11.10	-60.96	3.13	V	-52.99	74.66	1	0
	5 740.50	-61.42	11.70	-55.12	3.89	V	-47.31	68.98		
	7 654.00	-65.77	11.10	-51.65	4.54	V	-45.08	66.75		
	9 567.50	-64.04	11.00	-47.90	5.12	V	-42.02	63.70		
	11 481.00	-66.56	11.40	-47.62	5.69	V	-41.91	63.58		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
25/2	1.4 MHz	1882.5	QPSK	6	0	5.36
			16-QAM	6	0	6.19
			64-QAM	6	0	6.73
			256-QAM	6	0	6.97
	3 MHz		QPSK	15	0	5.27
			16-QAM	15	0	6.21
			64-QAM	15	0	6.71
			256-QAM	15	0	6.93
	5 MHz		QPSK	25	0	5.37
			16-QAM	25	0	6.21
			64-QAM	25	0	6.67
			256-QAM	25	0	6.91
	10 MHz		QPSK	50	0	5.49
			16-QAM	50	0	6.24
			64-QAM	50	0	6.65
			256-QAM	50	0	6.91
	15 MHz		QPSK	75	0	5.40
			16-QAM	75	0	6.23
			64-QAM	75	0	6.67
			256-QAM	75	0	6.92
20 MHz	QPSK	100	0	5.37		
	16-QAM	100	0	6.22		
	64-QAM	100	0	6.63		
	256-QAM	100	0	6.90		

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 256 ~ 279.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
25/2	1.4 MHz	1882.5	QPSK	6	0	1.0980
			16-QAM	6	0	1.0986
			64-QAM	6	0	1.0958
			256-QAM	6	0	1.0971
	3 MHz		QPSK	15	0	2.7110
			16-QAM	15	0	2.7141
			64-QAM	15	0	2.7119
			256-QAM	15	0	2.7106
	5 MHz		QPSK	25	0	4.5226
			16-QAM	25	0	4.5181
			64-QAM	25	0	4.5186
			256-QAM	25	0	4.5232
	10 MHz		QPSK	50	0	9.0137
			16-QAM	50	0	9.0052
			64-QAM	50	0	9.0210
			256-QAM	50	0	8.9902
	15 MHz		QPSK	75	0	13.505
			16-QAM	75	0	13.479
			64-QAM	75	0	13.507
			256-QAM	75	0	13.472
20 MHz	QPSK	100	0	17.978		
	16-QAM	100	0	18.028		
	64-QAM	100	0	17.981		
	256-QAM	100	0	17.997		

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 232 ~ 255.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
25/2	1.4	3.6790	9.3774	30.815	-79.688	-48.873	-13.00
		3.6790	9.9631	30.815	-80.325	-49.510	
		3.6780	4.0175	30.200	-80.402	-50.202	
	3	3.6815	9.4173	30.815	-79.747	-48.932	
		3.7114	8.9183	30.815	-80.209	-49.394	
		3.6885	9.2004	30.815	-80.492	-49.677	
	5	3.7194	9.0793	30.815	-80.153	-49.338	
		3.7114	9.6964	30.815	-80.422	-49.607	
		3.6850	3.7548	30.200	-80.060	-49.860	
	10	3.7189	8.8988	30.815	-80.722	-49.907	
		3.7044	4.0708	30.200	-80.191	-49.991	
		3.6785	9.1072	30.815	-79.548	-48.733	
	15	3.6910	8.8769	30.815	-80.255	-49.440	
		3.7039	9.4457	30.815	-79.568	-48.753	
		3.7044	8.2822	30.815	-80.761	-49.946	
	20	3.7169	8.8300	30.815	-80.317	-49.502	
		3.7124	8.2682	30.815	-80.887	-50.072	
		3.7005	9.4437	30.815	-80.859	-50.044	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 280 ~ 315.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 196 ~ 231.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1850,700,000 Hz
- ▣ CHANNEL: 26047 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1850 700 003	0.0	0.000 000	0.000
100 %		-30	1850 700 005	2.7	0.000 000	0.001
100 %		-20	1850 700 001	-2.1	0.000 000	-0.001
100 %		-10	1850 700 006	3.2	0.000 000	0.002
100 %		0	1850 700 001	-2.1	0.000 000	-0.001
100 %		+10	1850 700 005	2.2	0.000 000	0.001
100 %		+30	1850 699 999	-3.4	0.000 000	-0.002
100 %		+40	1850 700 005	2.5	0.000 000	0.001
100 %		+50	1850 700 005	2.6	0.000 000	0.001
Batt. Endpoint		3.400	+20	1850 700 000	-2.3	0.000 000

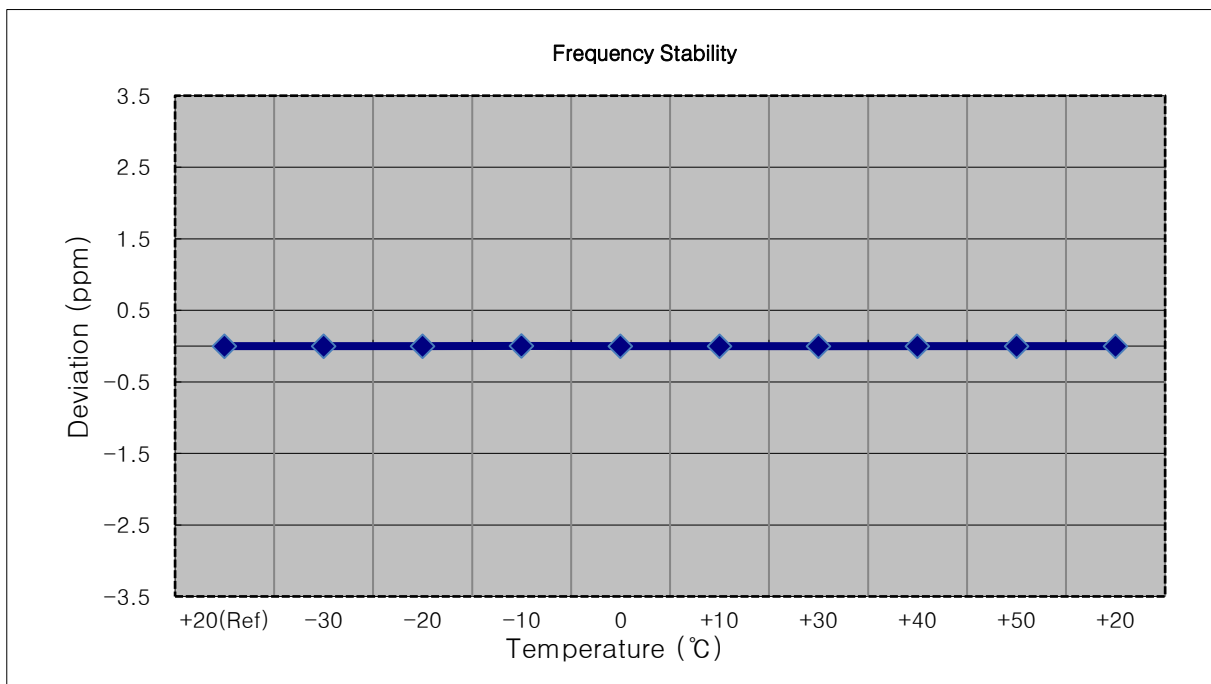


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1851,500,000 Hz
- ▣ CHANNEL: 26055 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1851 500 002	0.0	0.000 000	0.000
100 %		-30	1851 500 004	2.7	0.000 000	0.001
100 %		-20	1851 500 004	2.0	0.000 000	0.001
100 %		-10	1851 500 006	4.0	0.000 000	0.002
100 %		0	1851 499 999	-3.1	0.000 000	-0.002
100 %		+10	1851 500 005	3.5	0.000 000	0.002
100 %		+30	1851 499 997	-4.5	0.000 000	-0.002
100 %		+40	1851 500 004	2.6	0.000 000	0.001
100 %		+50	1851 500 000	-2.2	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1851 500 000	-2.2	0.000 000

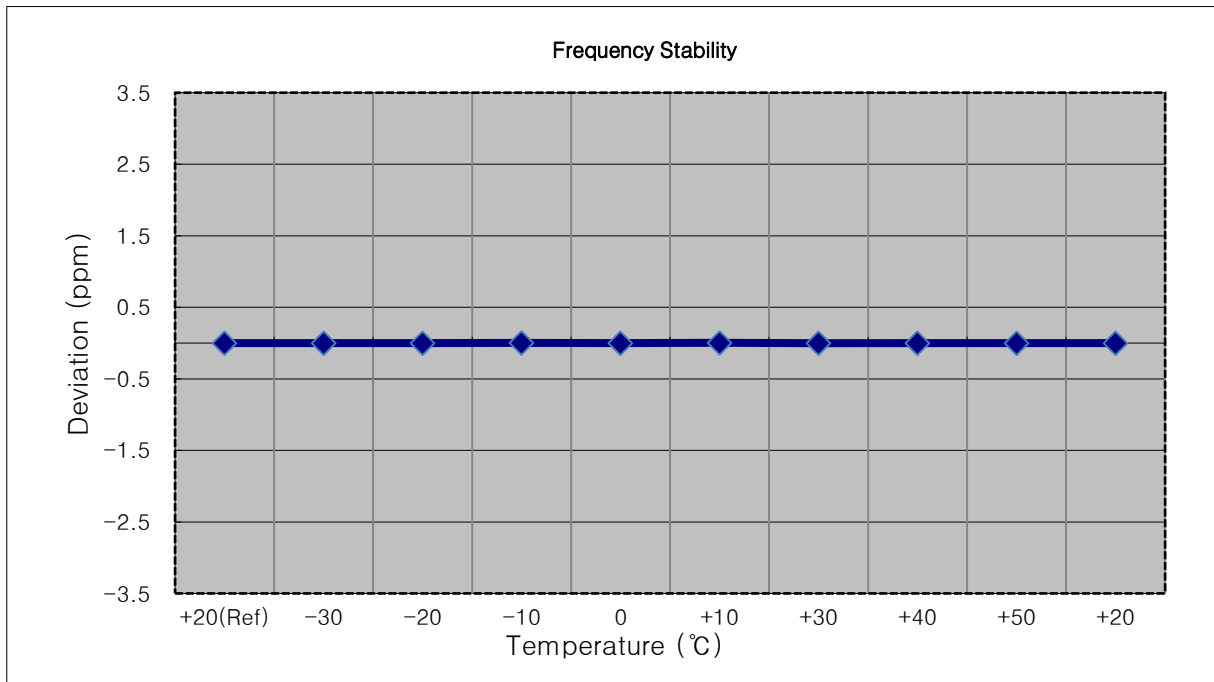


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1852,500,000 Hz
- ▣ CHANNEL: 26065 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1852 500 004	0.0	0.000 000	0.000
100 %		-30	1852 500 001	-2.7	0.000 000	-0.001
100 %		-20	1852 500 006	2.7	0.000 000	0.001
100 %		-10	1852 500 000	-3.6	0.000 000	-0.002
100 %		0	1852 500 000	-3.6	0.000 000	-0.002
100 %		+10	1852 500 007	3.2	0.000 000	0.002
100 %		+30	1852 500 008	4.3	0.000 000	0.002
100 %		+40	1852 500 001	-2.7	0.000 000	-0.001
100 %		+50	1852 500 007	2.9	0.000 000	0.002
Batt. Endpoint		3.400	+20	1852 500 000	-3.5	0.000 000

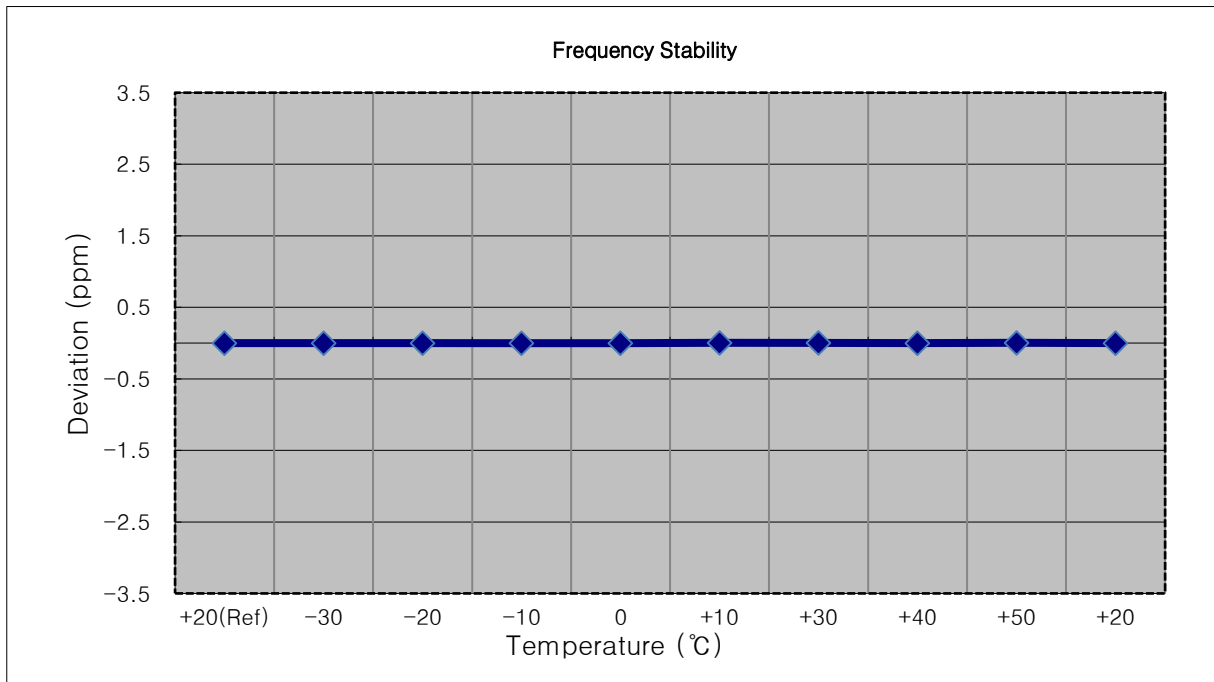


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1855,000,000 Hz
- ▣ CHANNEL: 26090 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1855 000 002	0.0	0.000 000	0.000
100 %		-30	1854 999 998	-3.5	0.000 000	-0.002
100 %		-20	1855 000 000	-2.1	0.000 000	-0.001
100 %		-10	1855 000 000	-1.7	0.000 000	-0.001
100 %		0	1855 000 000	-2.1	0.000 000	-0.001
100 %		+10	1854 999 998	-3.4	0.000 000	-0.002
100 %		+30	1854 999 999	-2.3	0.000 000	-0.001
100 %		+40	1855 000 001	-0.8	0.000 000	0.000
100 %		+50	1855 000 000	-2.0	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1855 000 000	-2.0	0.000 000

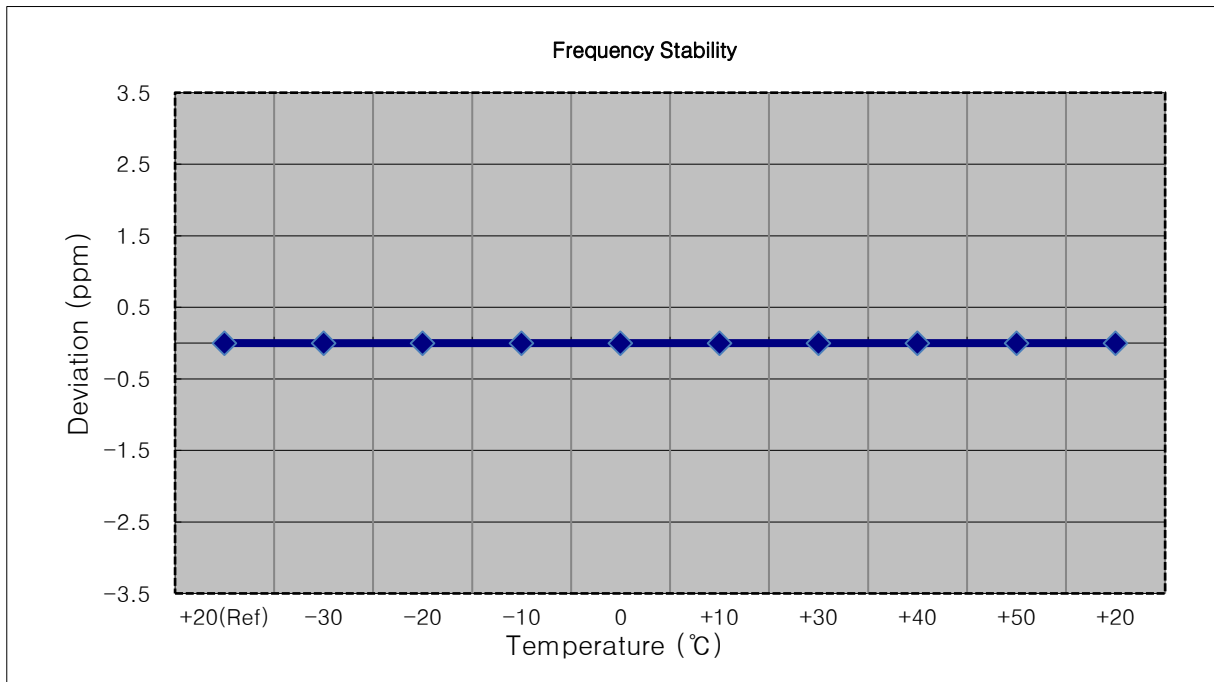


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1857,500,000 Hz
- ▣ CHANNEL: 26115 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1857 500 001	0.0	0.000 000	0.000
100 %		-30	1857 499 997	-4.4	0.000 000	-0.002
100 %		-20	1857 499 998	-3.7	0.000 000	-0.002
100 %		-10	1857 499 999	-2.3	0.000 000	-0.001
100 %		0	1857 500 005	3.1	0.000 000	0.002
100 %		+10	1857 499 998	-3.0	0.000 000	-0.002
100 %		+30	1857 500 004	2.2	0.000 000	0.001
100 %		+40	1857 499 999	-2.2	0.000 000	-0.001
100 %		+50	1857 499 999	-2.0	0.000 000	-0.001
Batt. Endpoint		3.400	+20	1857 500 004	2.3	0.000 000

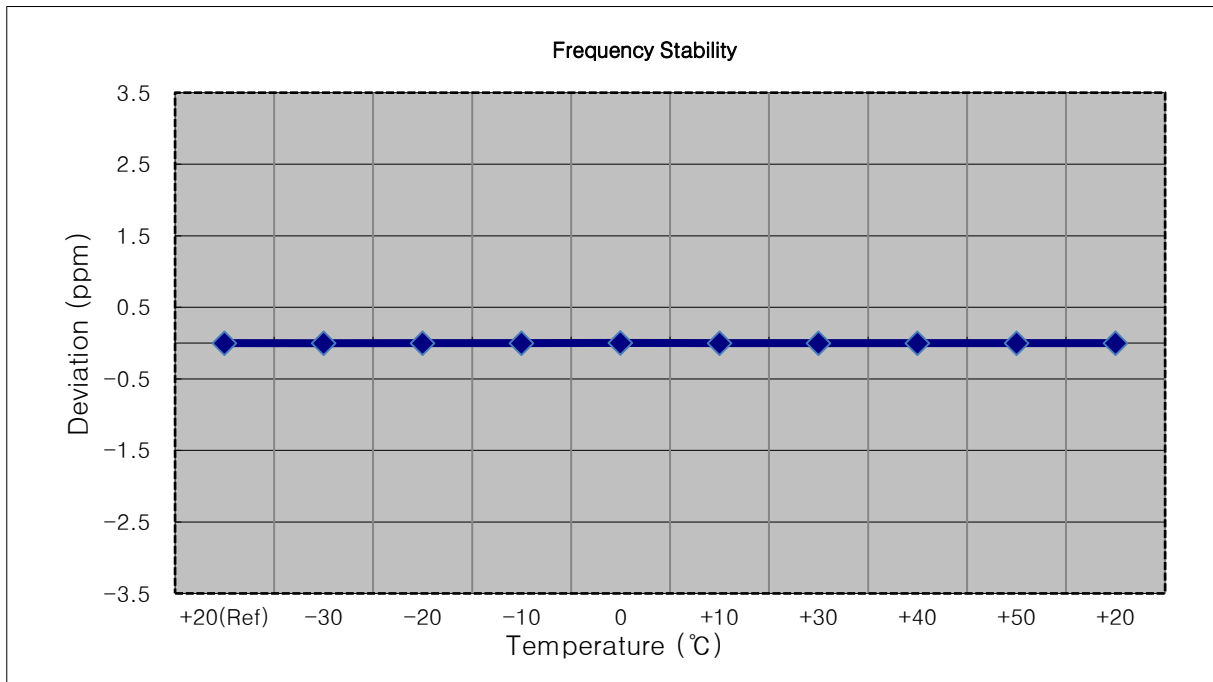


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1860,000,000 Hz
- ▣ CHANNEL: 26140 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1860 000 008	0.0	0.000 000	0.000
100 %		-30	1860 000 013	4.7	0.000 000	0.003
100 %		-20	1860 000 014	5.3	0.000 000	0.003
100 %		-10	1860 000 015	6.5	0.000 000	0.003
100 %		0	1860 000 012	3.3	0.000 000	0.002
100 %		+10	1860 000 014	5.4	0.000 000	0.003
100 %		+30	1860 000 013	4.6	0.000 000	0.002
100 %		+40	1860 000 014	5.6	0.000 000	0.003
100 %		+50	1860 000 012	3.8	0.000 000	0.002
Batt. Endpoint		3.400	+20	1860 000 013	5.1	0.000 000

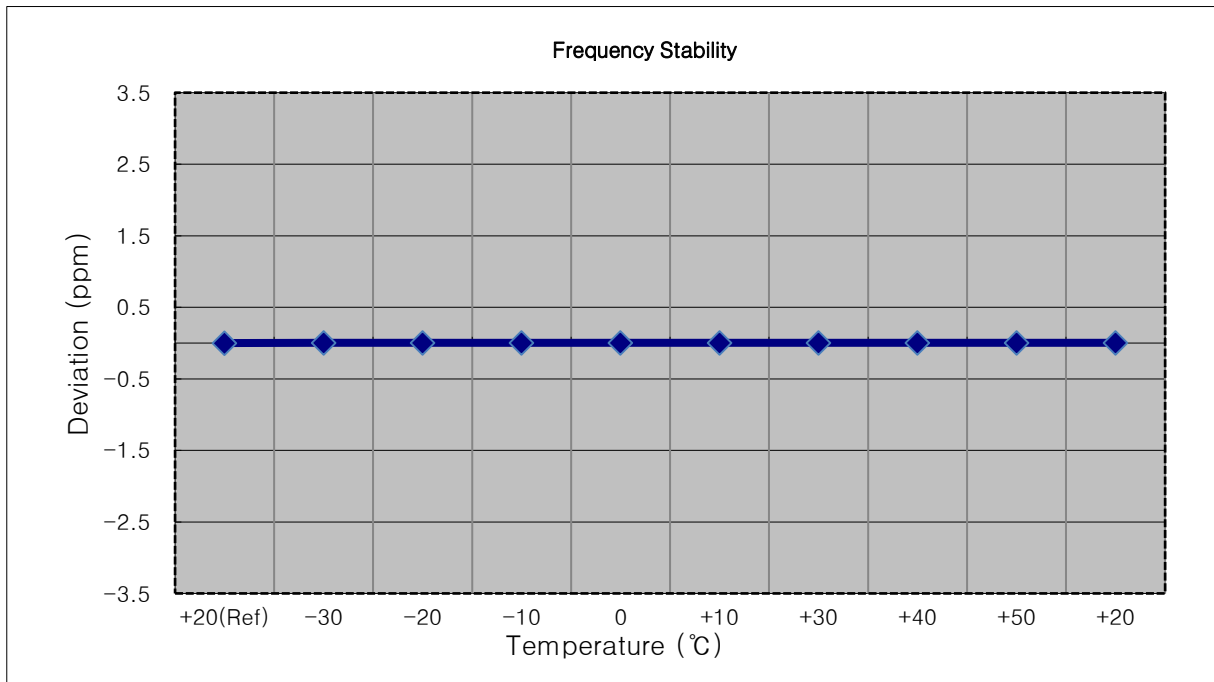


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 499 998	0.0	0.000 000	0.000
100 %		-30	1882 500 000	2.5	0.000 000	0.001
100 %		-20	1882 500 002	4.2	0.000 000	0.002
100 %		-10	1882 500 000	1.8	0.000 000	0.001
100 %		0	1882 500 001	2.9	0.000 000	0.002
100 %		+10	1882 500 000	2.7	0.000 000	0.001
100 %		+30	1882 500 001	2.9	0.000 000	0.002
100 %		+40	1882 500 002	3.9	0.000 000	0.002
100 %		+50	1882 500 001	2.8	0.000 000	0.001
Batt. Endpoint	3.400	+20	1882 500 001	3.0	0.000 000	0.002

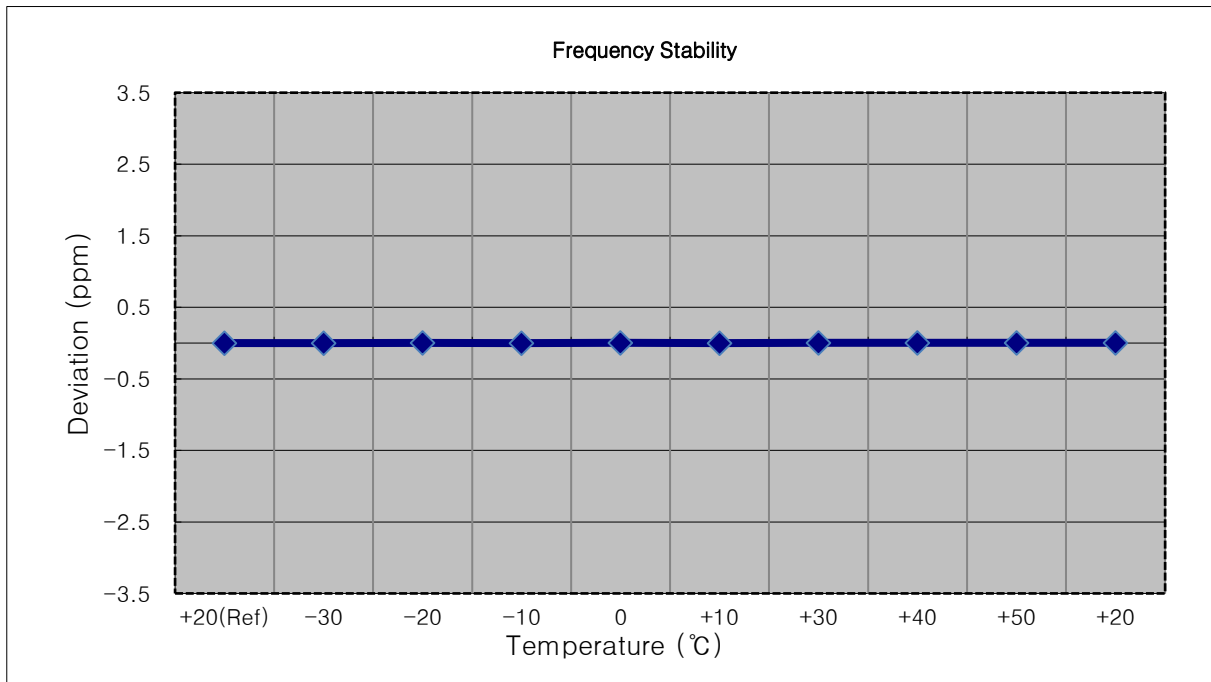


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 003	0.0	0.000 000	0.000
100 %		-30	1882 499 998	-4.5	0.000 000	-0.002
100 %		-20	1882 500 000	-2.3	0.000 000	-0.001
100 %		-10	1882 500 005	2.3	0.000 000	0.001
100 %		0	1882 499 998	-4.2	0.000 000	-0.002
100 %		+10	1882 499 998	-4.6	0.000 000	-0.002
100 %		+30	1882 499 998	-4.2	0.000 000	-0.002
100 %		+40	1882 499 999	-3.6	0.000 000	-0.002
100 %		+50	1882 500 005	2.7	0.000 000	0.001
Batt. Endpoint		3.400	+20	1882 500 000	-3.1	0.000 000

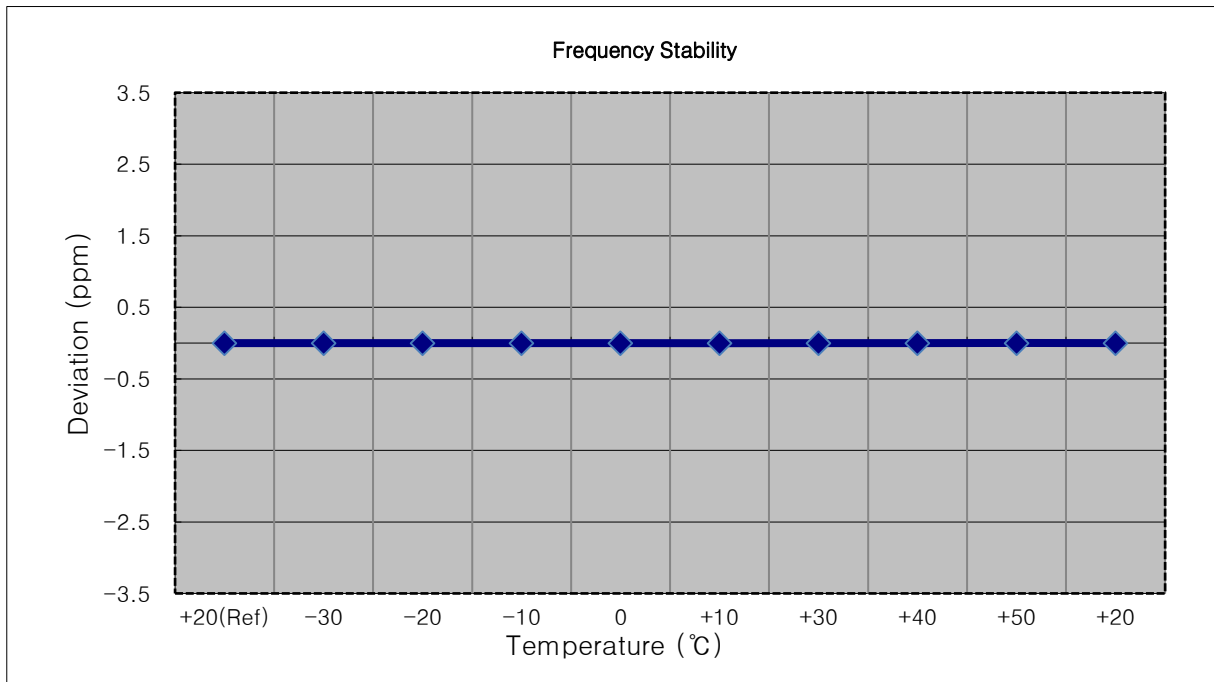


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 002	0.0	0.000 000	0.000
100 %		-30	1882 499 999	-2.9	0.000 000	-0.002
100 %		-20	1882 499 999	-3.5	0.000 000	-0.002
100 %		-10	1882 499 998	-4.0	0.000 000	-0.002
100 %		0	1882 499 999	-2.9	0.000 000	-0.002
100 %		+10	1882 500 005	2.7	0.000 000	0.001
100 %		+30	1882 500 005	2.5	0.000 000	0.001
100 %		+40	1882 499 999	-3.1	0.000 000	-0.002
100 %		+50	1882 499 999	-3.3	0.000 000	-0.002
Batt. Endpoint		3.400	+20	1882 500 004	1.7	0.000 000

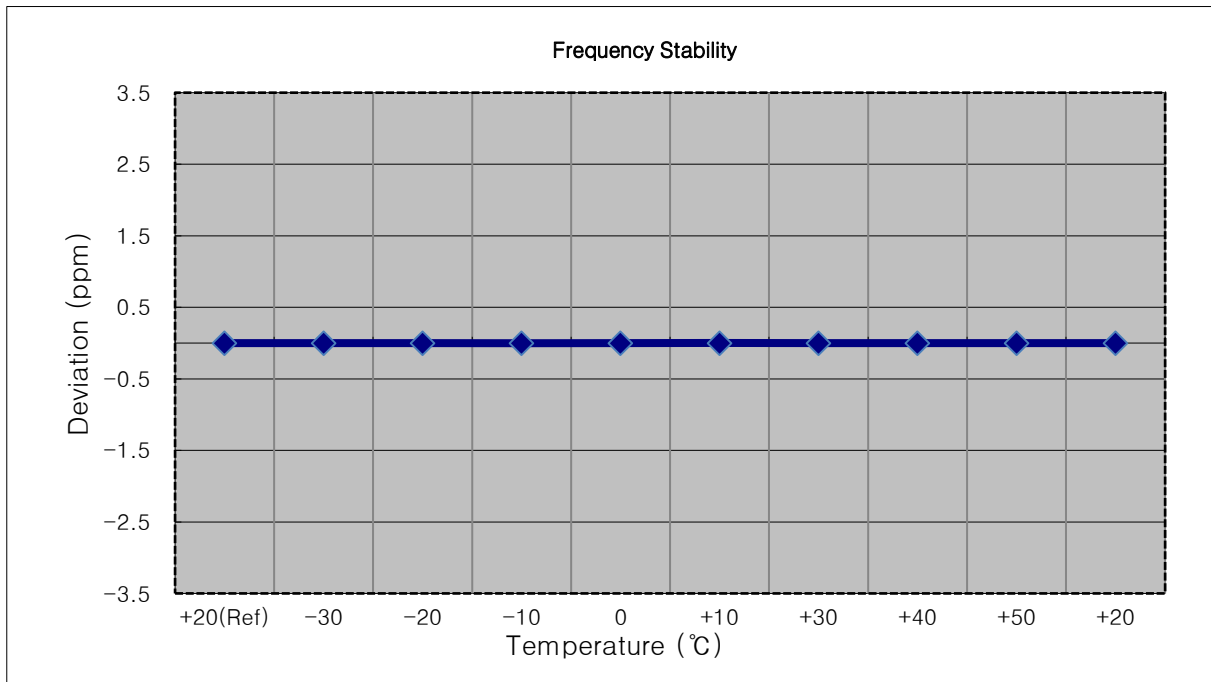


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 002	0.0	0.000 000	0.000
100 %		-30	1882 500 005	2.1	0.000 000	0.001
100 %		-20	1882 500 000	-2.2	0.000 000	-0.001
100 %		-10	1882 499 998	-4.1	0.000 000	-0.002
100 %		0	1882 500 000	-2.1	0.000 000	-0.001
100 %		+10	1882 500 000	-2.3	0.000 000	-0.001
100 %		+30	1882 500 005	3.0	0.000 000	0.002
100 %		+40	1882 500 005	2.3	0.000 000	0.001
100 %		+50	1882 500 000	-2.3	0.000 000	-0.001
Batt. Endpoint	3.400	+20	1882 500 000	-2.3	0.000 000	-0.001

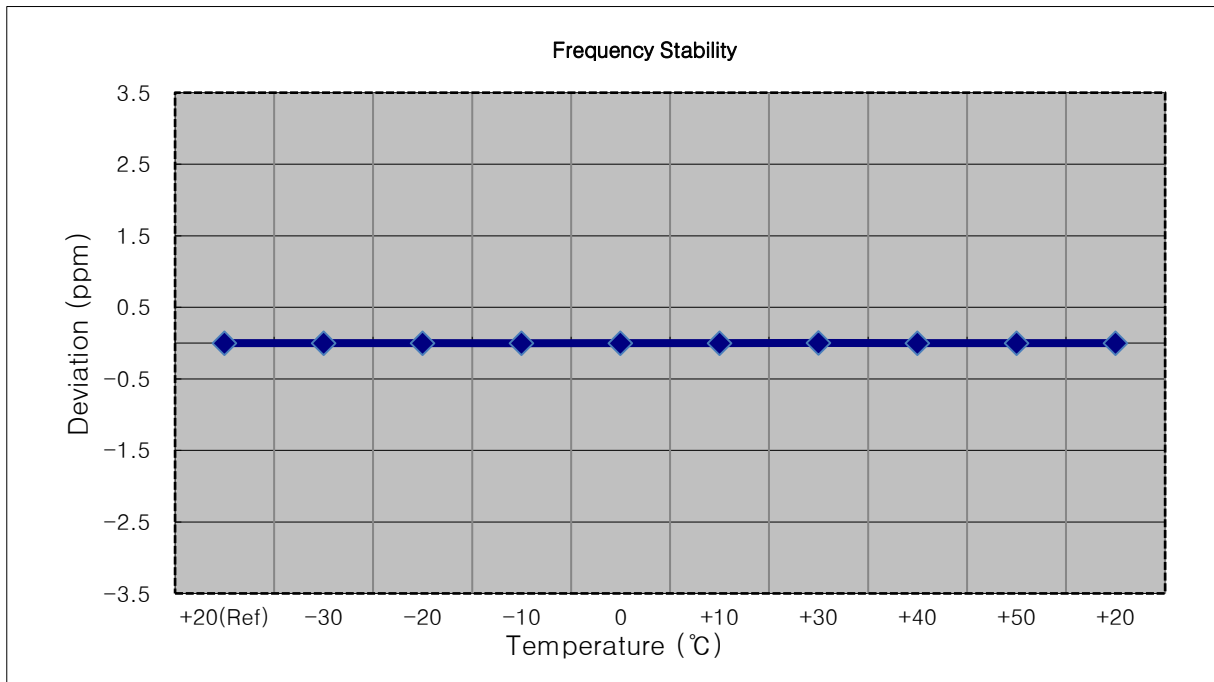


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 006	0.0	0.000 000	0.000
100 %		-30	1882 500 010	4.1	0.000 000	0.002
100 %		-20	1882 500 009	3.1	0.000 000	0.002
100 %		-10	1882 500 010	4.3	0.000 000	0.002
100 %		0	1882 500 009	2.6	0.000 000	0.001
100 %		+10	1882 500 010	3.8	0.000 000	0.002
100 %		+30	1882 500 010	3.5	0.000 000	0.002
100 %		+40	1882 500 010	3.7	0.000 000	0.002
100 %		+50	1882 500 008	2.1	0.000 000	0.001
Batt. Endpoint		3.400	+20	1882 500 010	3.6	0.000 000

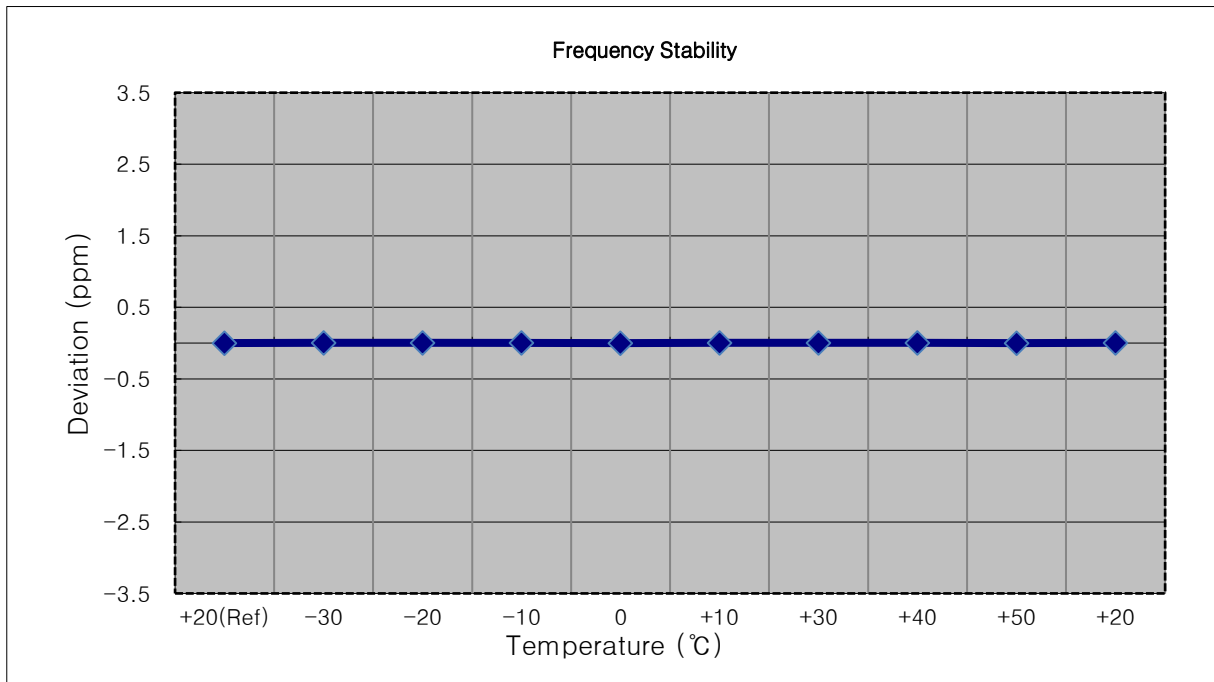


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1882,500,000 Hz
- ▣ CHANNEL: 26365 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1882 500 005	0.0	0.000 000	0.000
100 %		-30	1882 500 011	5.6	0.000 000	0.003
100 %		-20	1882 500 010	4.8	0.000 000	0.003
100 %		-10	1882 500 011	5.4	0.000 000	0.003
100 %		0	1882 500 009	4.2	0.000 000	0.002
100 %		+10	1882 500 011	6.0	0.000 000	0.003
100 %		+30	1882 500 012	6.4	0.000 000	0.003
100 %		+40	1882 500 009	4.1	0.000 000	0.002
100 %		+50	1882 500 011	5.7	0.000 000	0.003
Batt. Endpoint		3.400	+20	1882 500 011	5.7	0.000 000

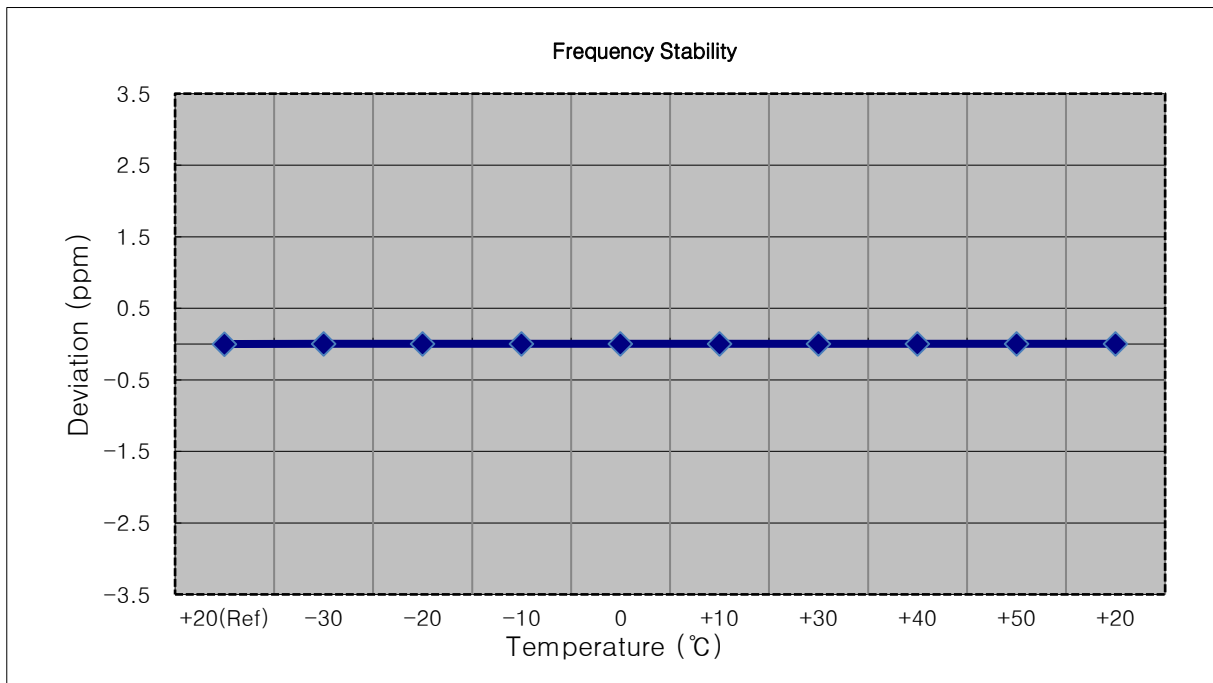


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1914,300,000 Hz
- ▣ CHANNEL: 26683 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1914 299 988	0.0	0.000 000	0.000
100 %		-30	1914 300 000	12.1	0.000 001	0.006
100 %		-20	1914 300 006	17.9	0.000 001	0.009
100 %		-10	1914 299 999	10.3	0.000 001	0.005
100 %		0	1914 299 999	10.9	0.000 001	0.006
100 %		+10	1914 299 976	-12.5	-0.000 001	-0.007
100 %		+30	1914 299 978	-9.9	-0.000 001	-0.005
100 %		+40	1914 300 002	13.9	0.000 001	0.007
100 %		+50	1914 299 978	-10.4	-0.000 001	-0.005
Batt. Endpoint		3.400	+20	1914 299 977	-11.8	-0.000 001

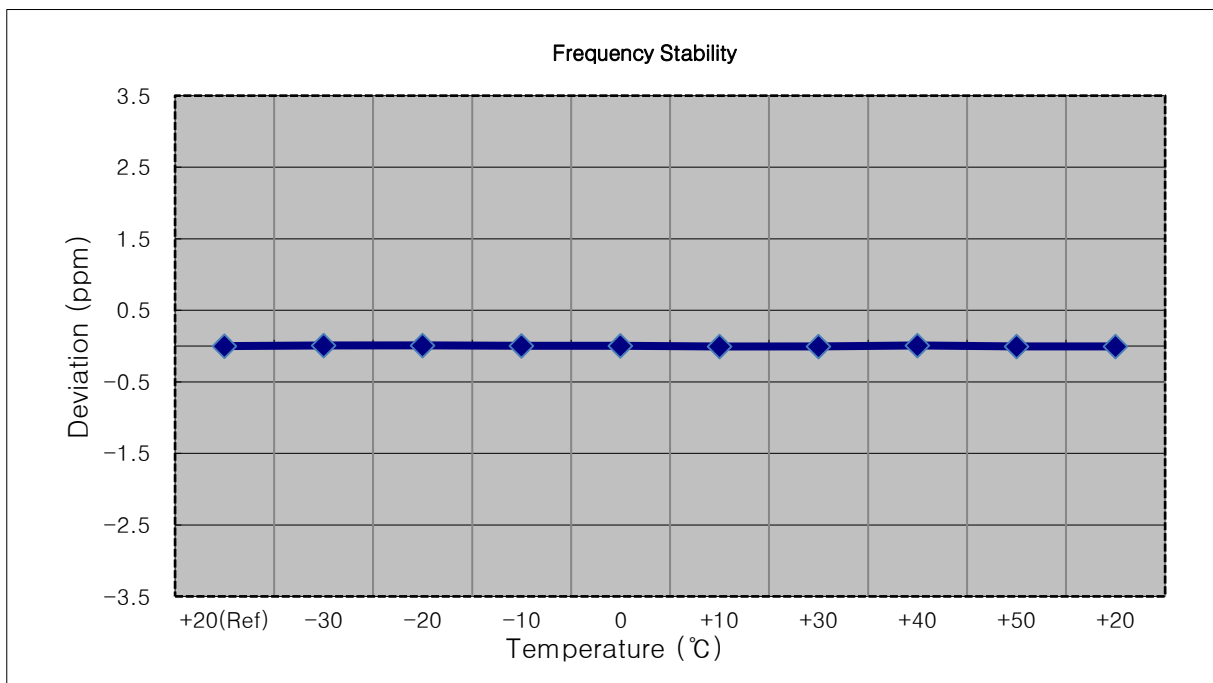


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1913,500,000 Hz
- ▣ CHANNEL: 26675 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1913 499 982	0.0	0.000 000	0.000
100 %		-30	1913 500 001	19.0	0.000 001	0.010
100 %		-20	1913 499 966	-15.9	-0.000 001	-0.008
100 %		-10	1913 500 005	23.2	0.000 001	0.012
100 %		0	1913 499 966	-16.3	-0.000 001	-0.009
100 %		+10	1913 499 992	10.3	0.000 001	0.005
100 %		+30	1913 499 958	-24.1	-0.000 001	-0.013
100 %		+40	1913 500 001	19.1	0.000 001	0.010
100 %		+50	1913 499 998	16.2	0.000 001	0.008
Batt. Endpoint		3.400	+20	1913 499 968	-13.5	-0.000 001

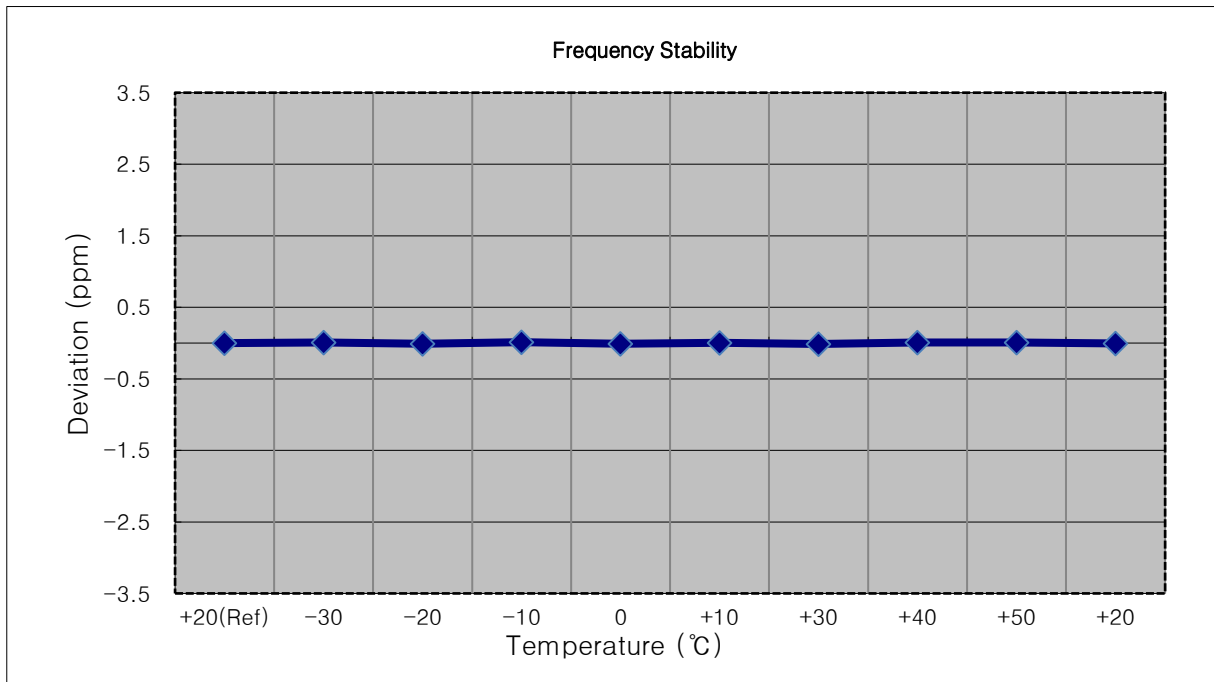


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1912,500,000 Hz
- ▣ CHANNEL: 26665 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1912 499 991	0.0	0.000 000	0.000
100 %		-30	1912 499 979	-12.6	-0.000 001	-0.007
100 %		-20	1912 499 977	-13.7	-0.000 001	-0.007
100 %		-10	1912 499 981	-10.2	-0.000 001	-0.005
100 %		0	1912 499 974	-17.0	-0.000 001	-0.009
100 %		+10	1912 499 977	-14.6	-0.000 001	-0.008
100 %		+30	1912 499 978	-12.8	-0.000 001	-0.007
100 %		+40	1912 499 976	-15.0	-0.000 001	-0.008
100 %		+50	1912 499 977	-14.4	-0.000 001	-0.008
Batt. Endpoint		3.400	+20	1912 499 980	-10.9	-0.000 001

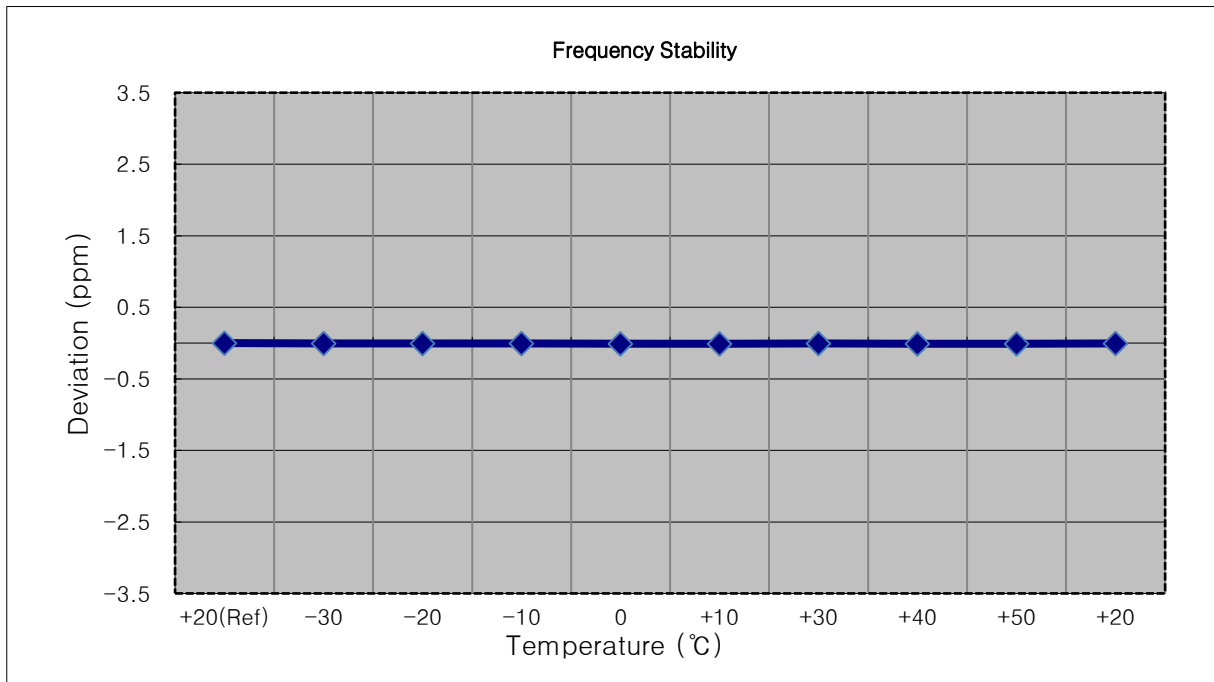


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1910,000,000 Hz
- ▣ CHANNEL: 26640 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1909 999 993	0.0	0.000 000	0.000
100 %		-30	1909 999 987	-6.0	0.000 000	-0.003
100 %		-20	1909 999 985	-7.4	0.000 000	-0.004
100 %		-10	1909 999 985	-7.9	0.000 000	-0.004
100 %		0	1909 999 984	-8.3	0.000 000	-0.004
100 %		+10	1909 999 981	-11.9	-0.000 001	-0.006
100 %		+30	1909 999 983	-9.5	0.000 000	-0.005
100 %		+40	1909 999 985	-7.8	0.000 000	-0.004
100 %		+50	1909 999 981	-11.4	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	1909 999 982	-10.5	-0.000 001

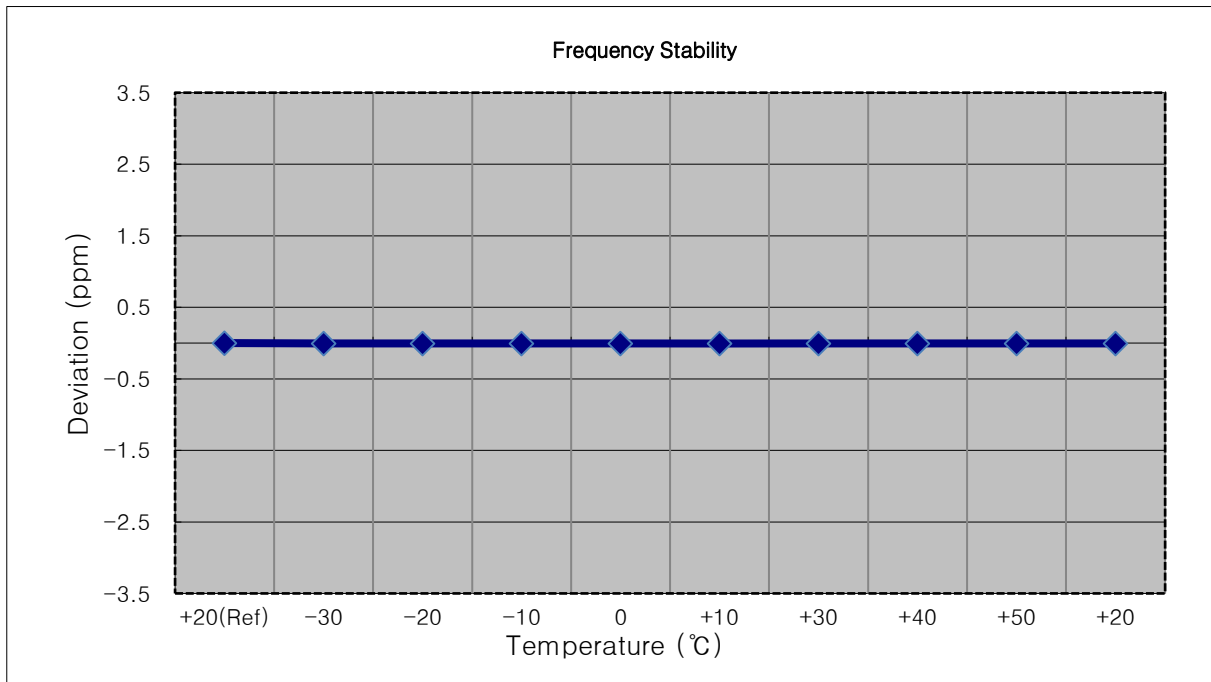


- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1907,500,000 Hz
- ▣ CHANNEL: 26615 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1907 499 990	0.0	0.000 000	0.000
100 %		-30	1907 499 981	-9.6	-0.000 001	-0.005
100 %		-20	1907 499 981	-9.5	0.000 000	-0.005
100 %		-10	1907 499 977	-13.3	-0.000 001	-0.007
100 %		0	1907 499 977	-13.6	-0.000 001	-0.007
100 %		+10	1907 499 979	-11.1	-0.000 001	-0.006
100 %		+30	1907 499 979	-10.9	-0.000 001	-0.006
100 %		+40	1907 499 977	-12.8	-0.000 001	-0.007
100 %		+50	1907 499 982	-8.3	0.000 000	-0.004
Batt. Endpoint		3.400	+20	1907 499 977	-13.2	-0.000 001

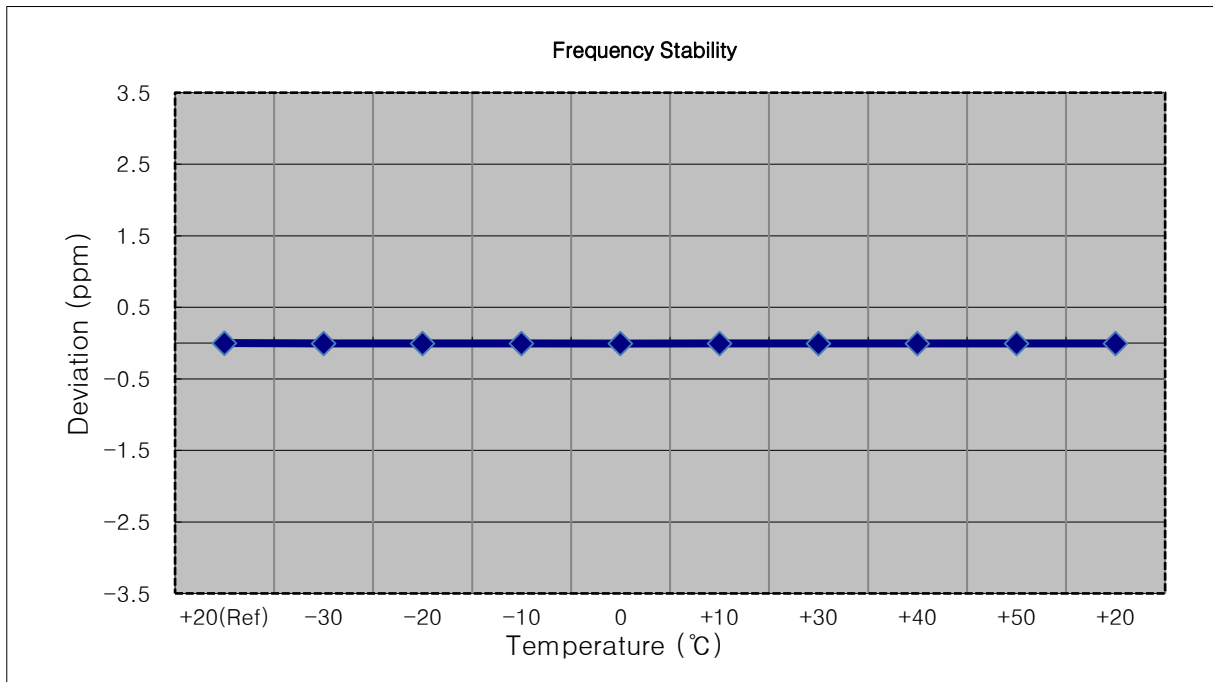

- ▣ MODE: LTE B25/B2
- ▣ OPERATING FREQUENCY: 1905,000,000 Hz
- ▣ CHANNEL: 26590 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1904 999 996	0.0	0.000 000	0.000
100 %		-30	1904 999 985	-11.0	-0.000 001	-0.006
100 %		-20	1904 999 984	-11.8	-0.000 001	-0.006
100 %		-10	1904 999 989	-6.9	0.000 000	-0.004
100 %		0	1904 999 985	-10.7	-0.000 001	-0.006
100 %		+10	1904 999 987	-9.1	0.000 000	-0.005
100 %		+30	1904 999 984	-11.9	-0.000 001	-0.006
100 %		+40	1904 999 983	-12.4	-0.000 001	-0.007
100 %		+50	1904 999 985	-11.2	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	1904 999 984	-11.9	-0.000 001

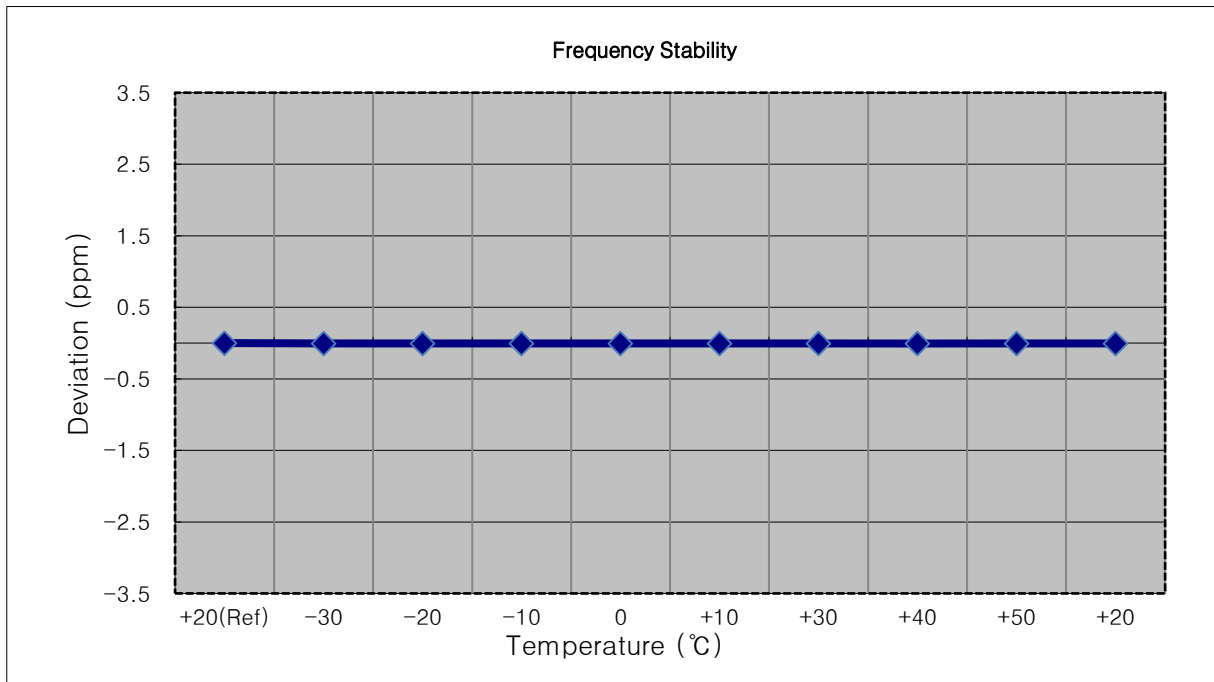


10. TEST PLOTS (Main 1 Ant)

BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(1)



BW1.4 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

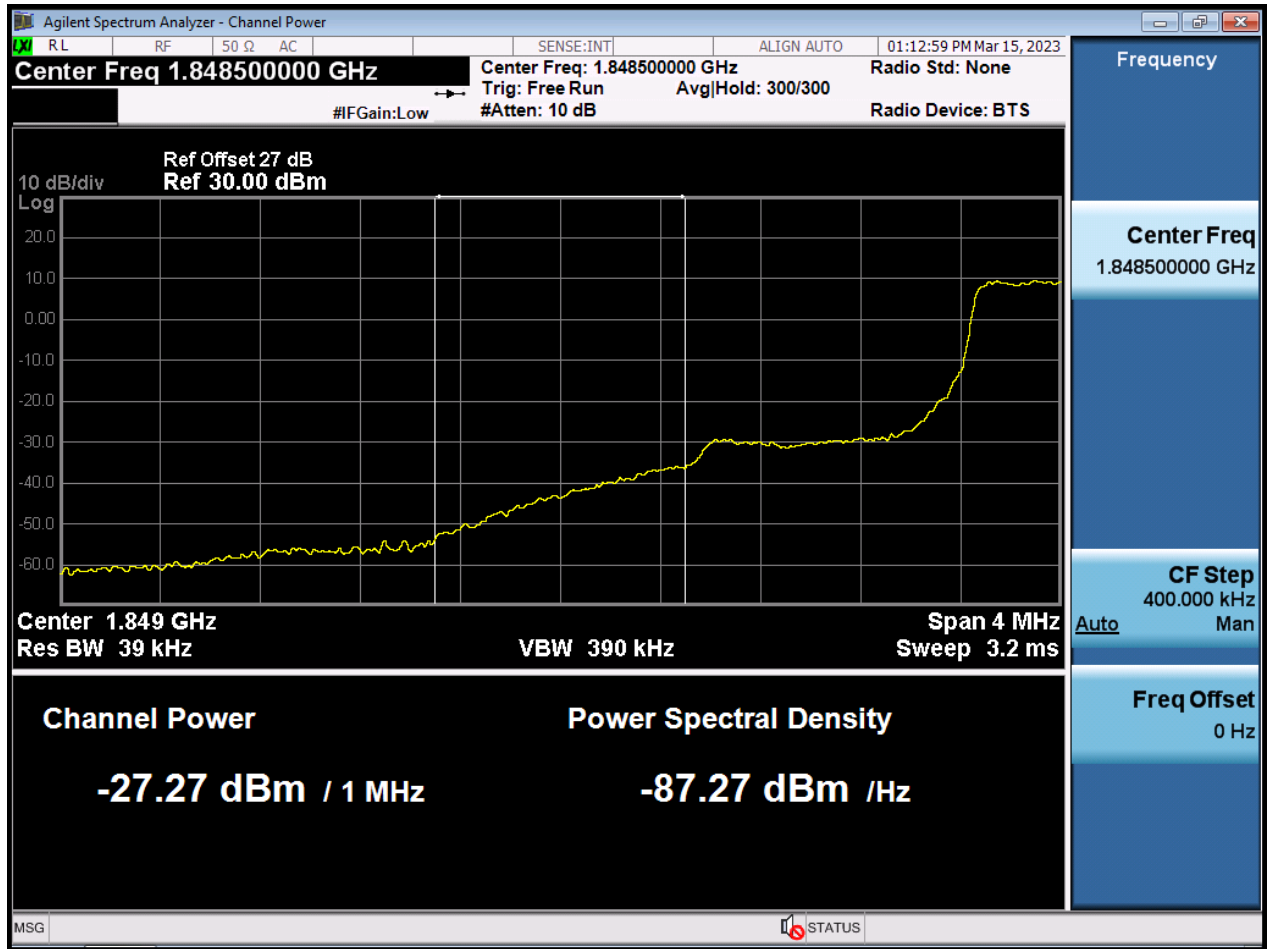


BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(1)




BW1.4 M_BandEdge_Highest Channel_QPSK_FullIRB(2)



BW1.4 M_BandEdge_Lowest Channel_QPSK_1RB

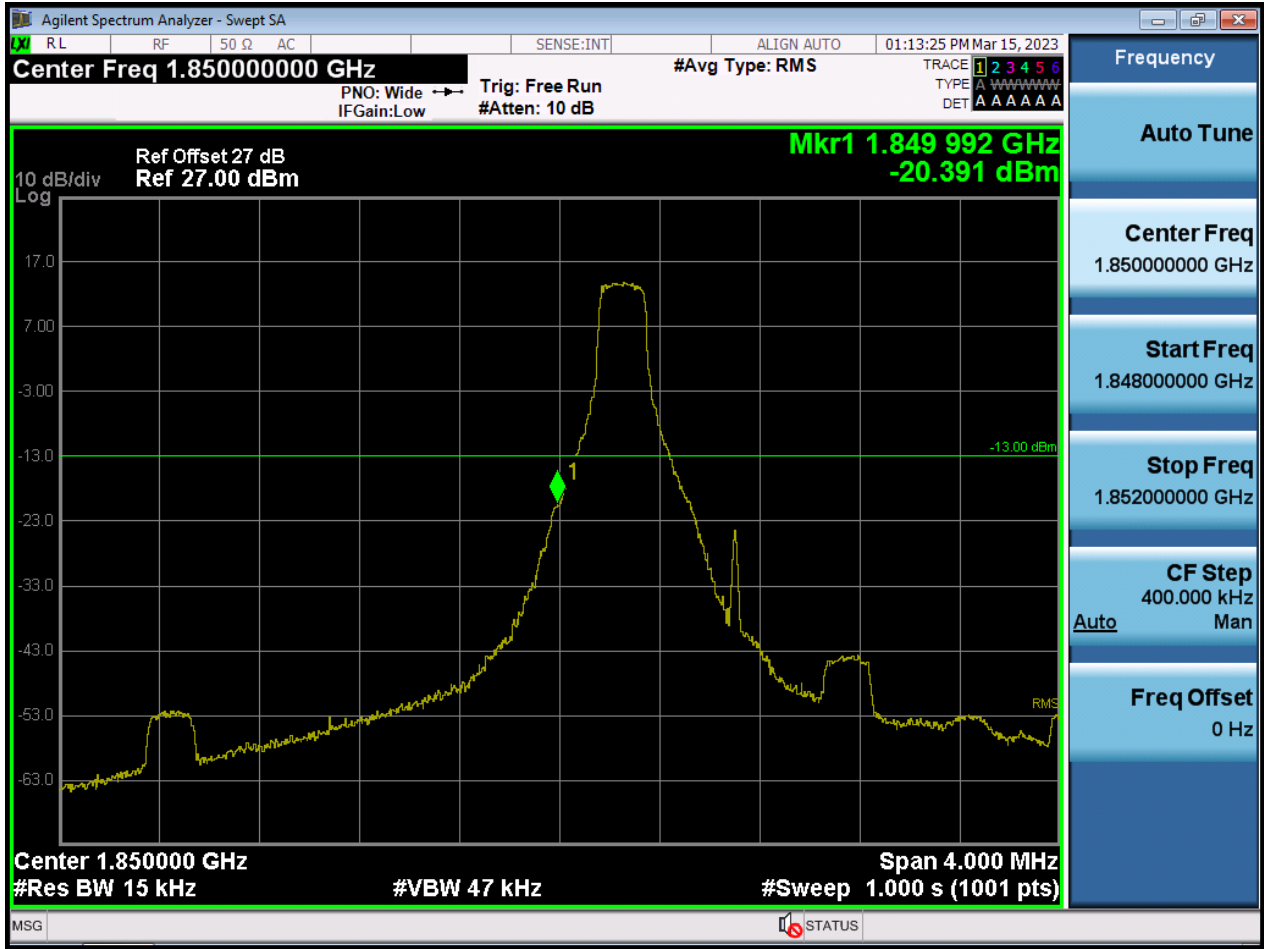


BW1.4 M_BandEdge_Highest Channel_QPSK_1RB

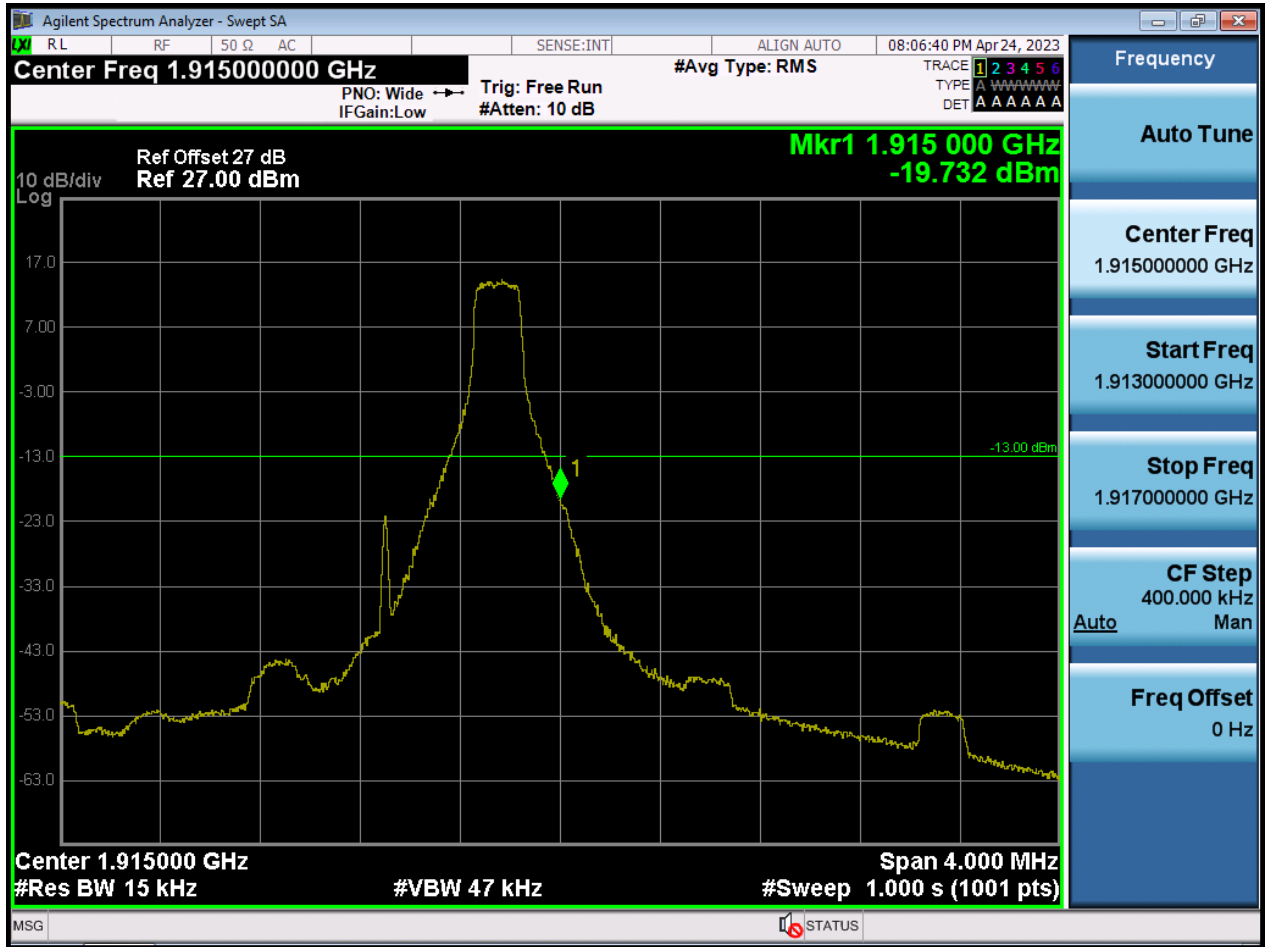

BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW3 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

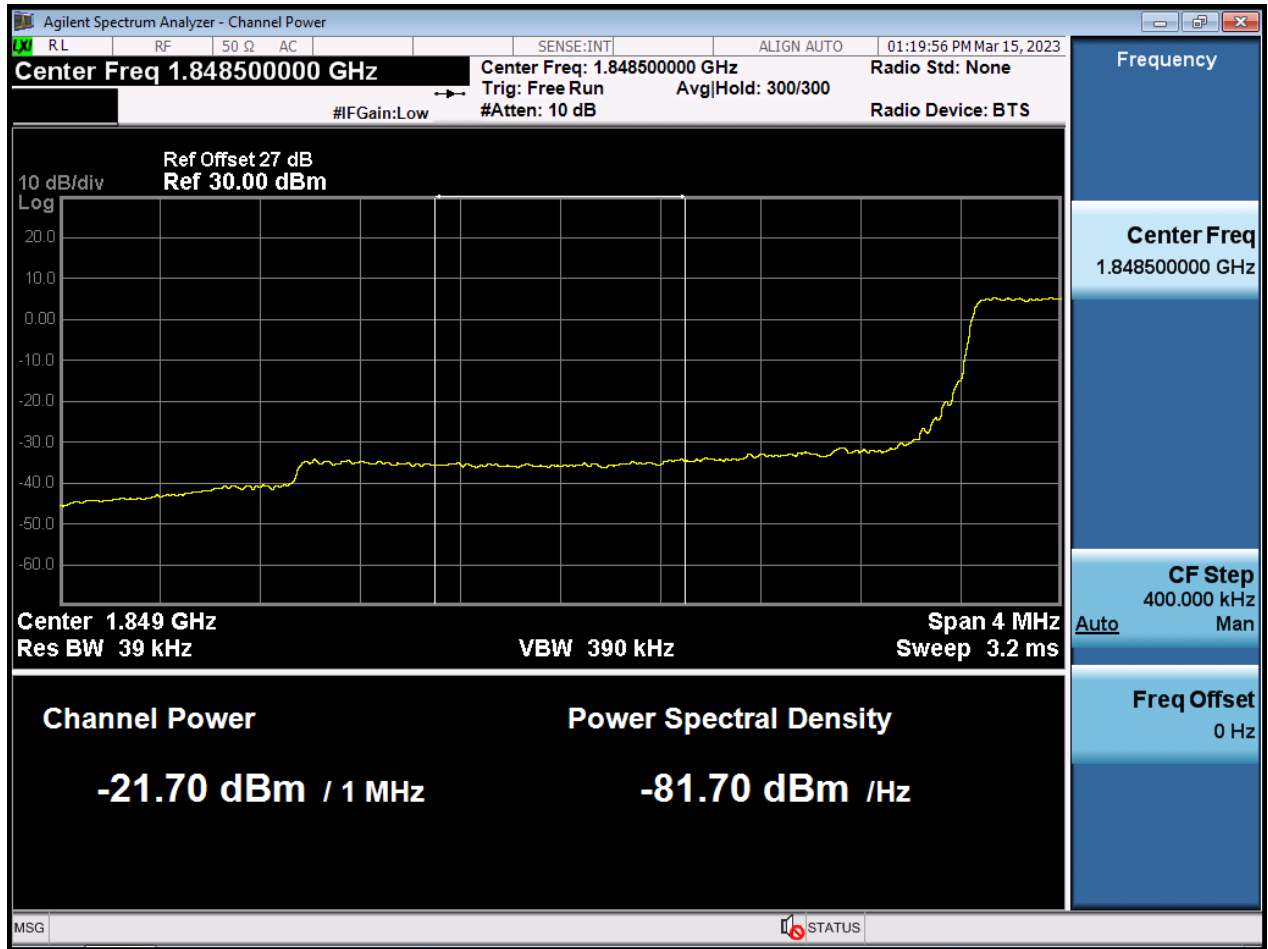


BW3 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW3 M_BandEdge_Highest Channel_QPSK_FullRB(2)

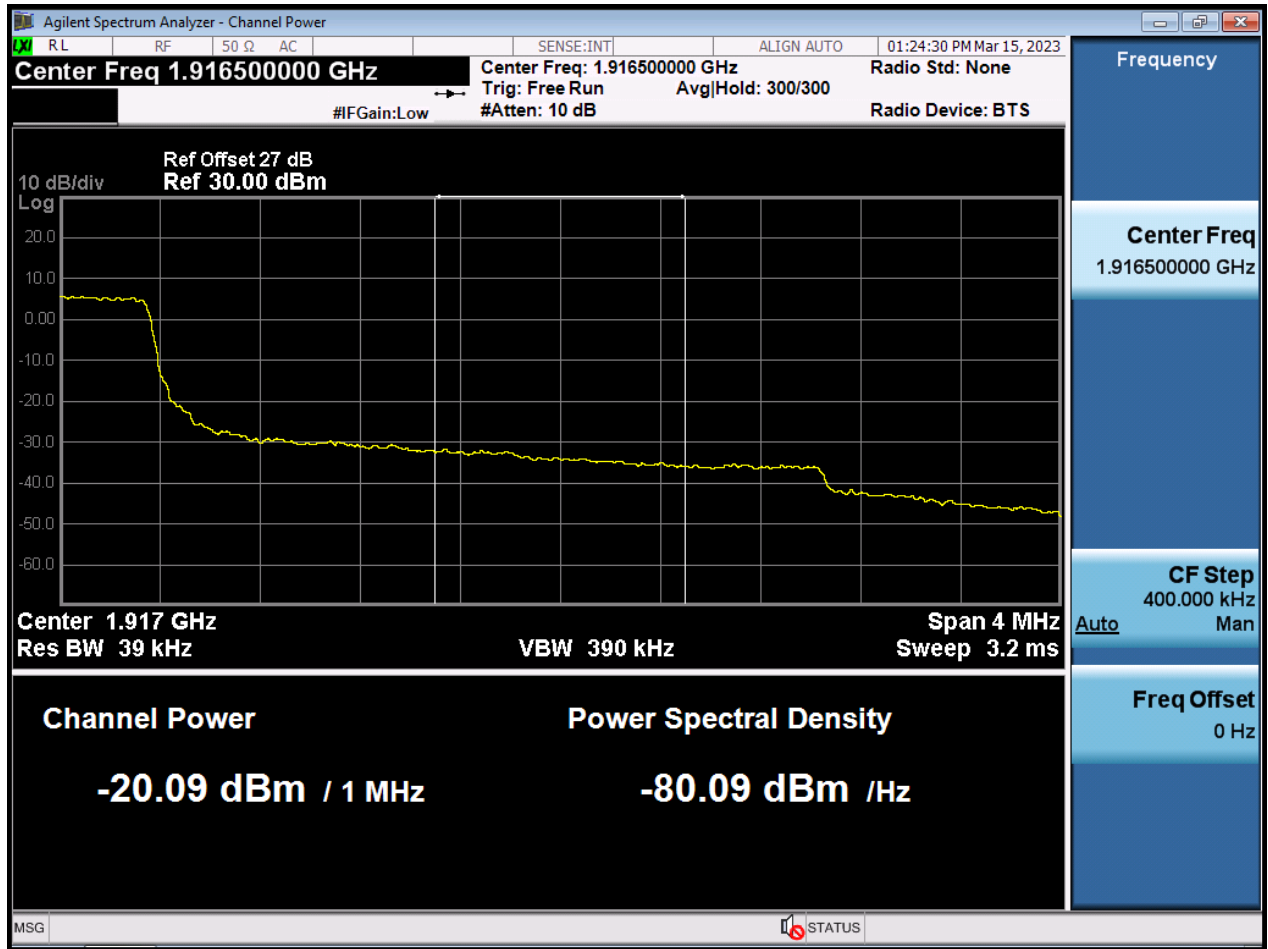

BW3 M_BandEdge_Lowest Channel_QPSK_1RB

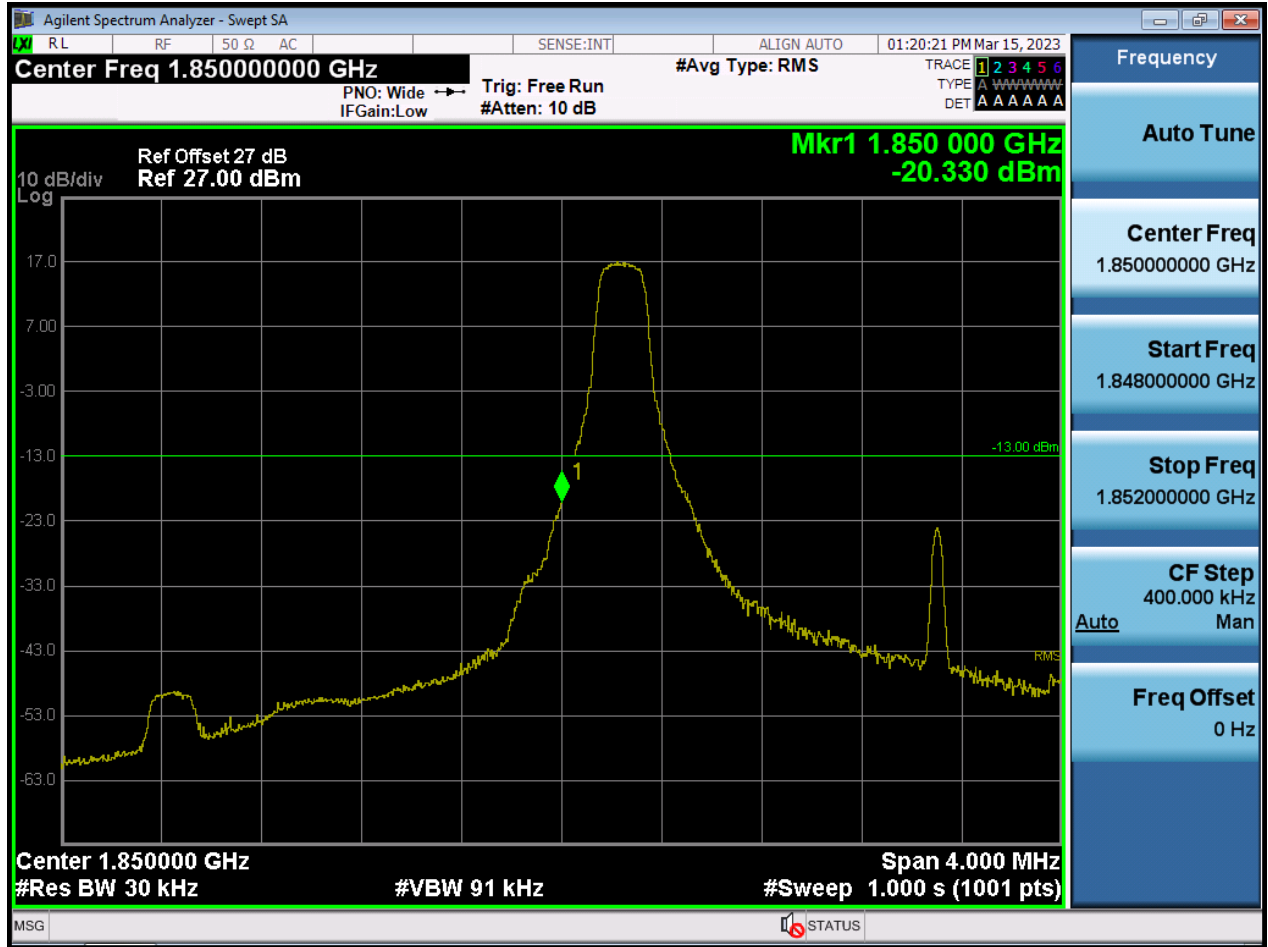


BW3 M_BandEdge_Highest Channel_QPSK_1RB



BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW5 M_BandEdge_Lowest Channel_QPSK_FullIRB(2)

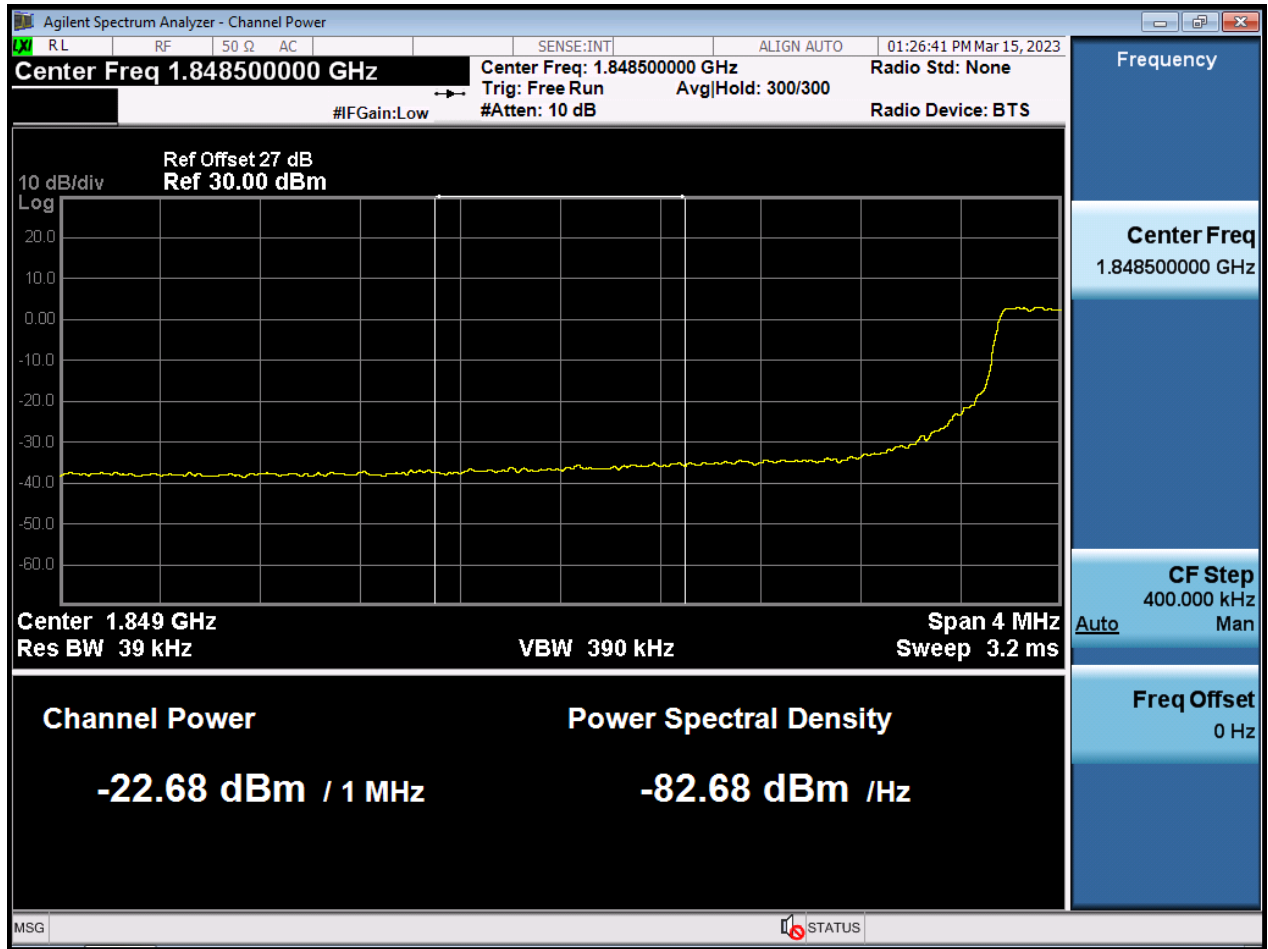


BW5 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW5 M_BandEdge_Highest Channel_QPSK_FullRB(2)

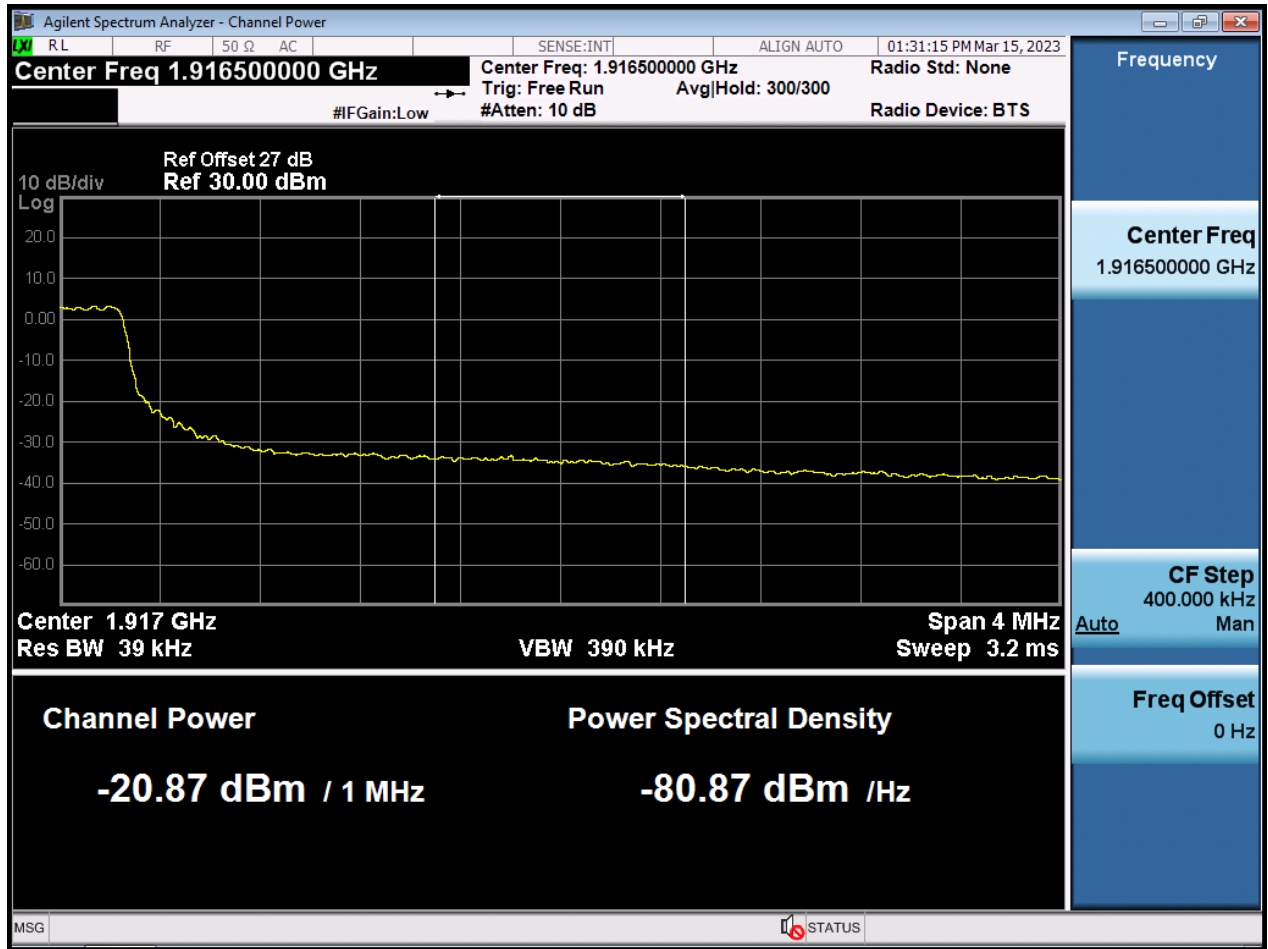

BW5 M_BandEdge_Lowest Channel_QPSK_1RB

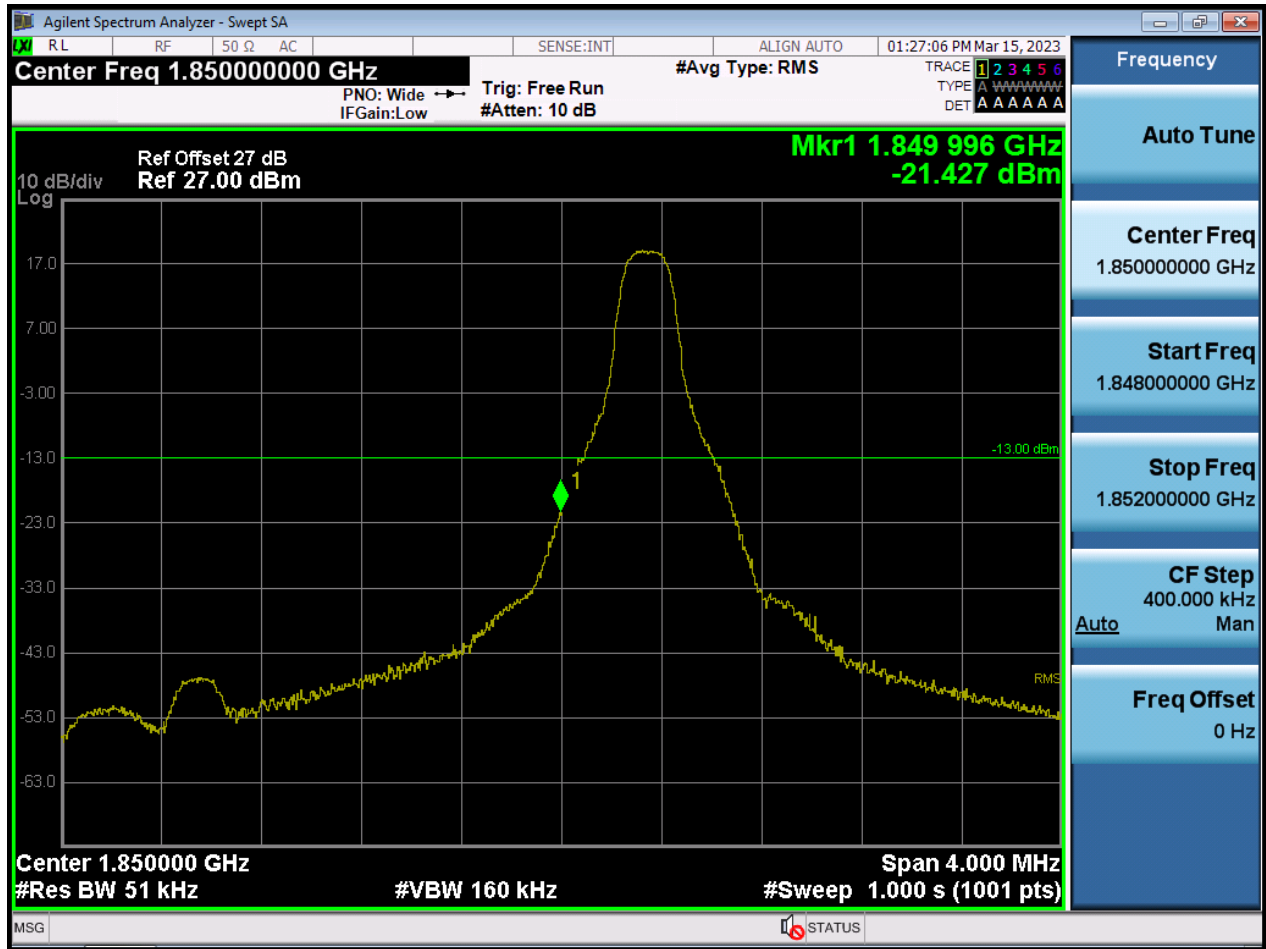


BW5 M_BandEdge_Highest Channel_QPSK_1RB



BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW10 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

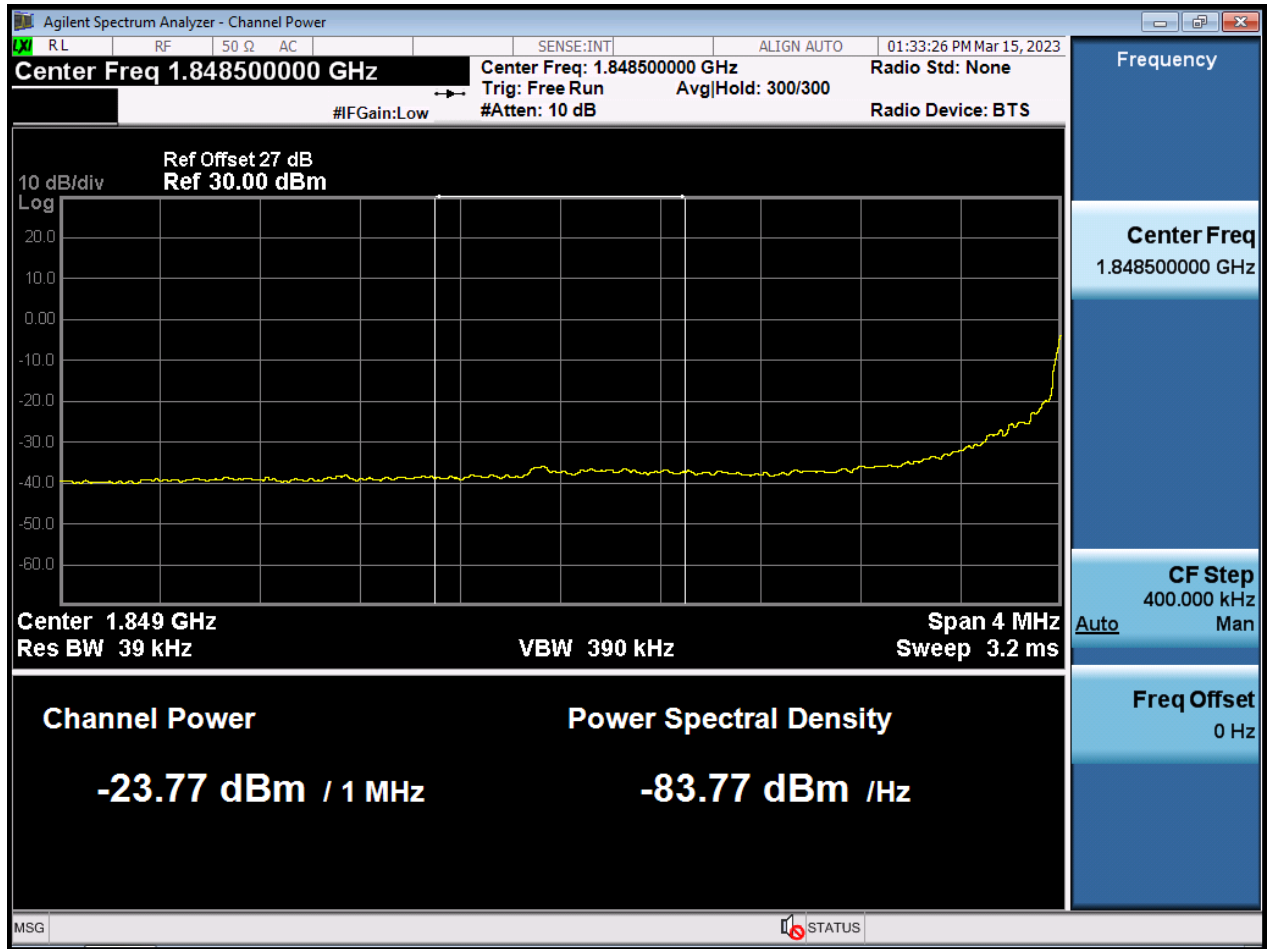

BW10 M_BandEdge_Highest Channel_QPSK_FullRB(1)




BW10 M_BandEdge_Highest Channel_QPSK_FullRB(2)

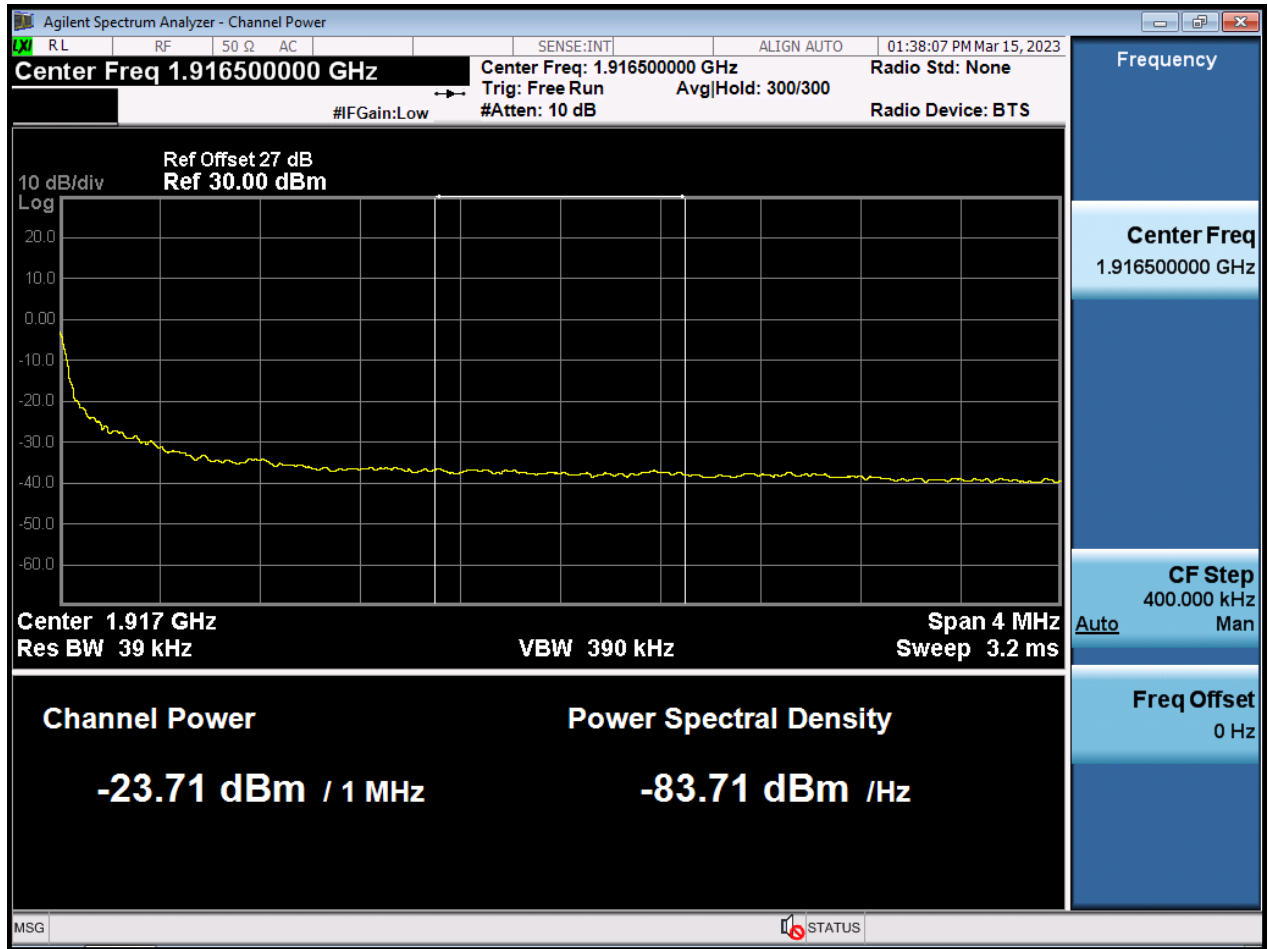

BW10 M_BandEdge_Lowest Channel_QPSK_1RB




BW10 M_BandEdge_Highest Channel_QPSK_1RB

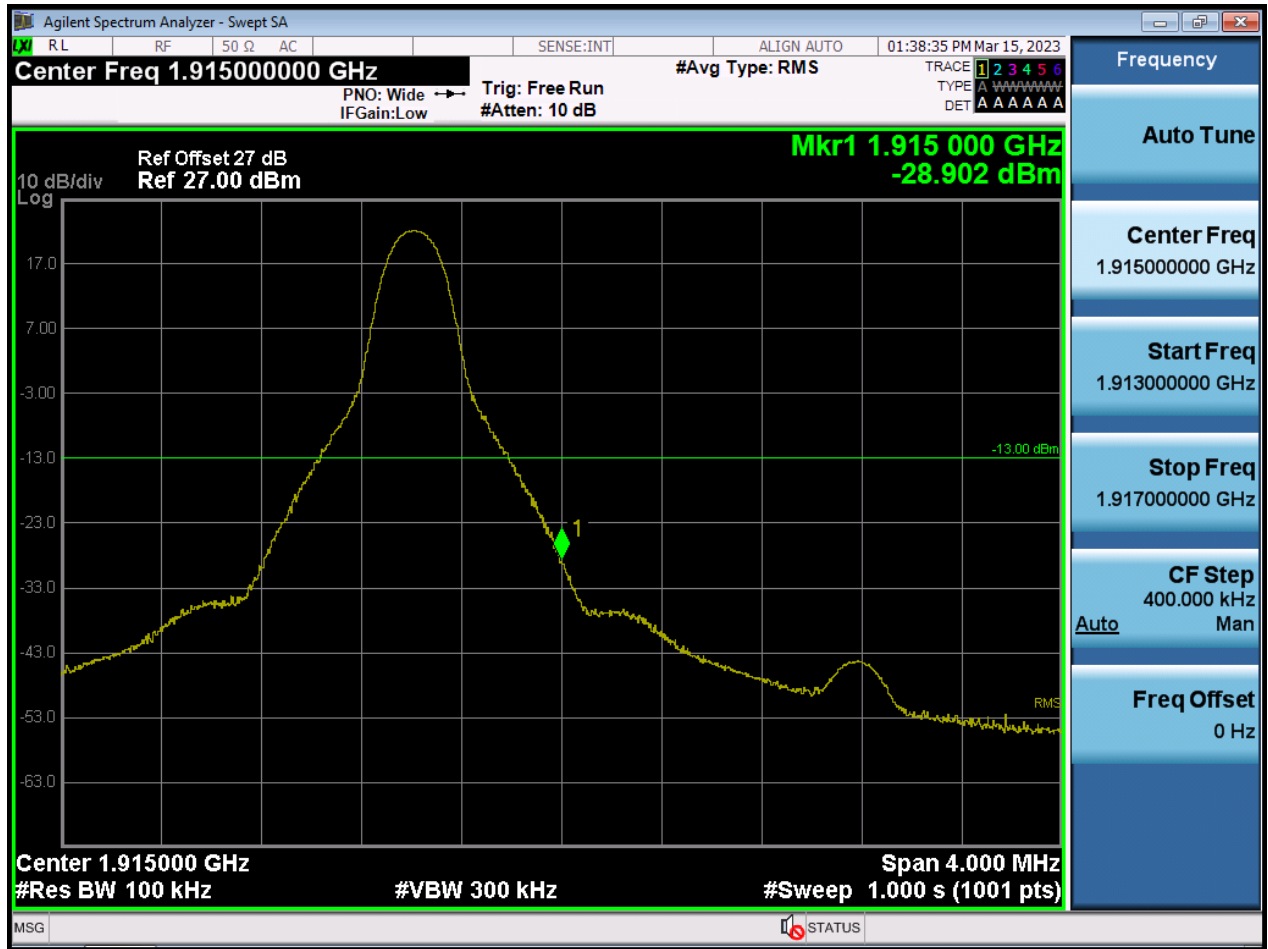

BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(1)




BW15 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

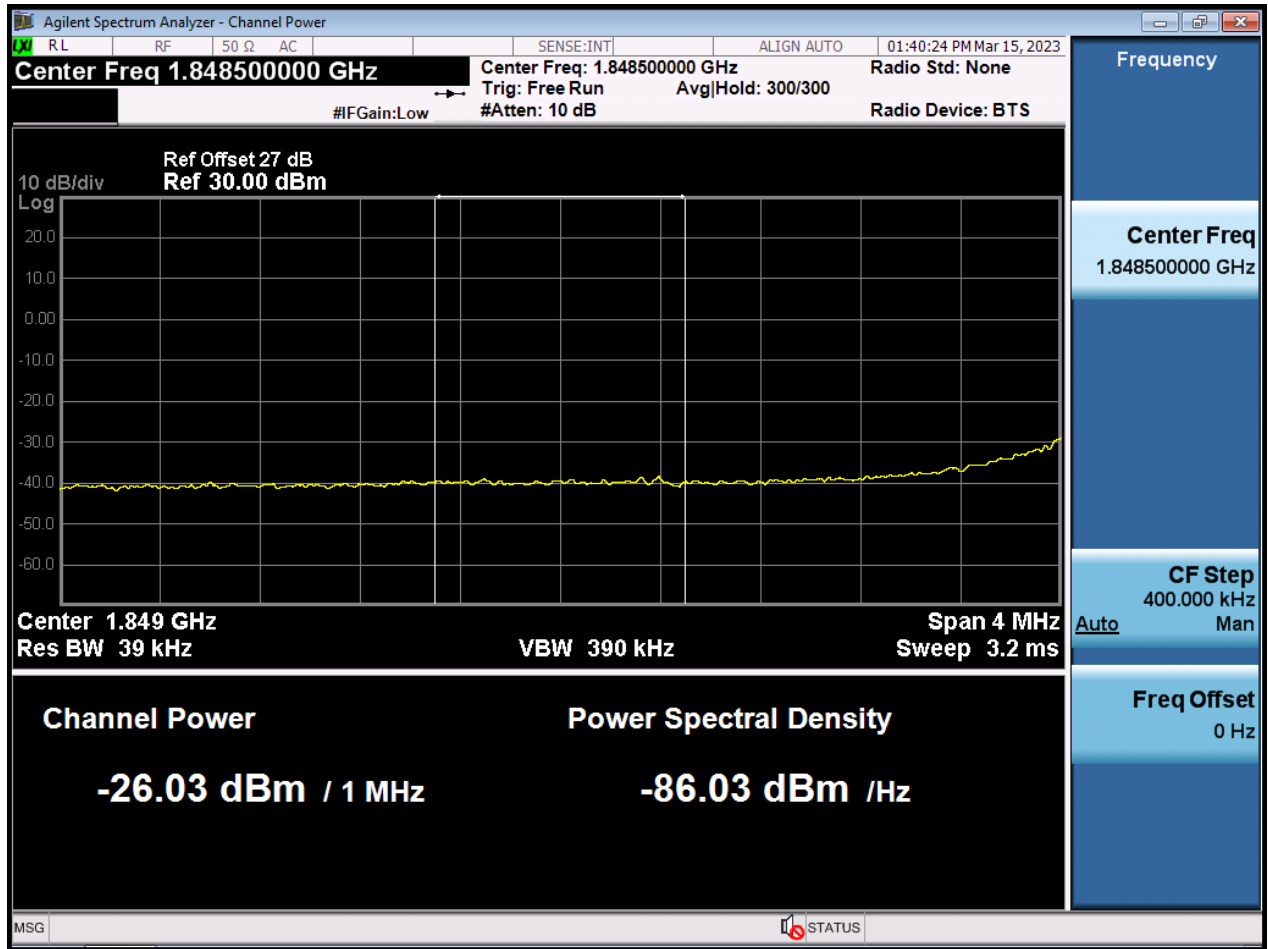


BW15 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW15 M_BandEdge_Highest Channel_QPSK_FullRB(2)

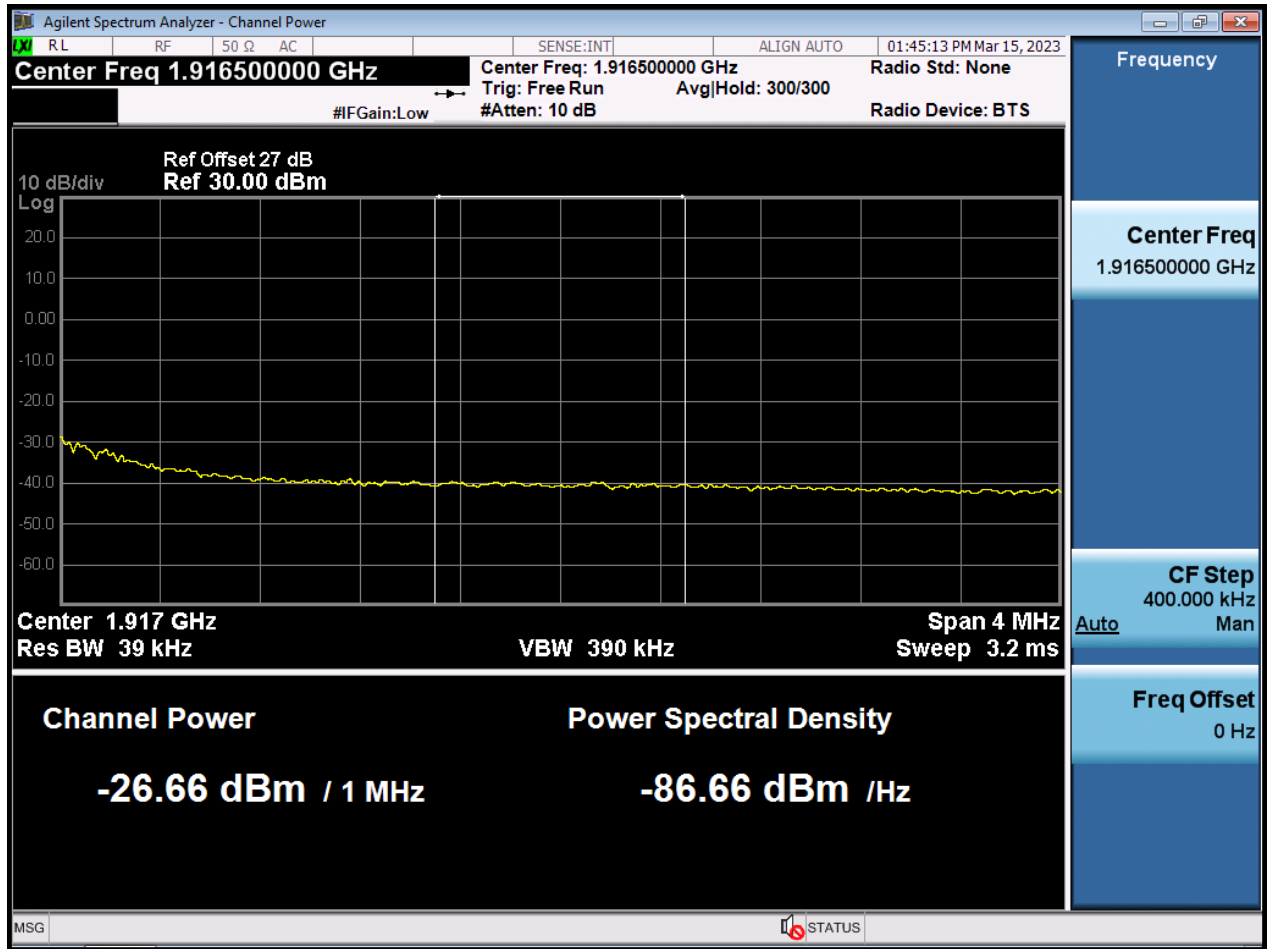

BW15 M_BandEdge_Lowest Channel_QPSK_1RB

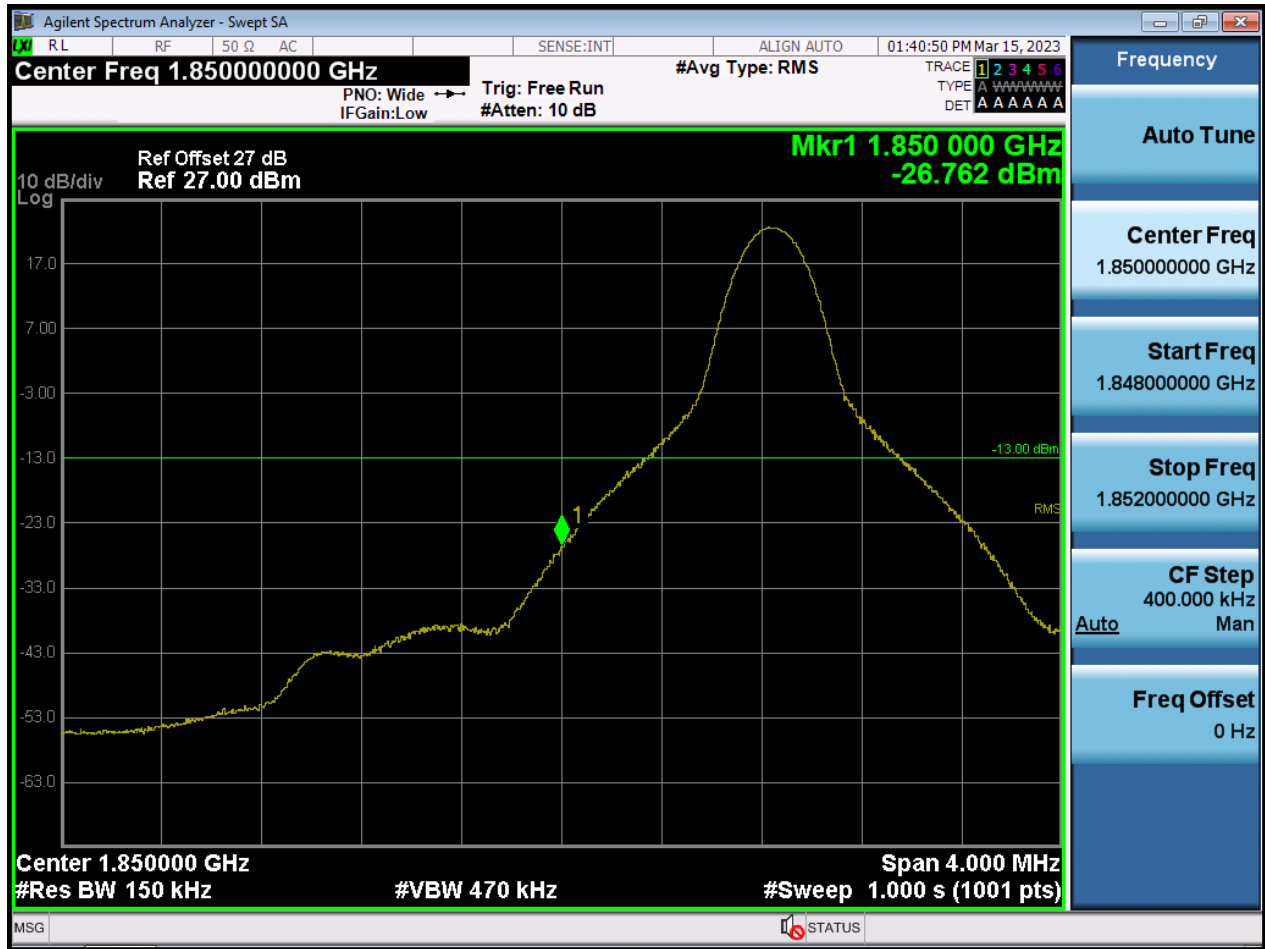


BW15 M_BandEdge_Highest Channel_QPSK_1RB



BW20 M_BandEdge_Lowest Channel_QPSK_FullIRB(1)




BW20 M_BandEdge_Lowest Channel_QPSK_FullRB(2)

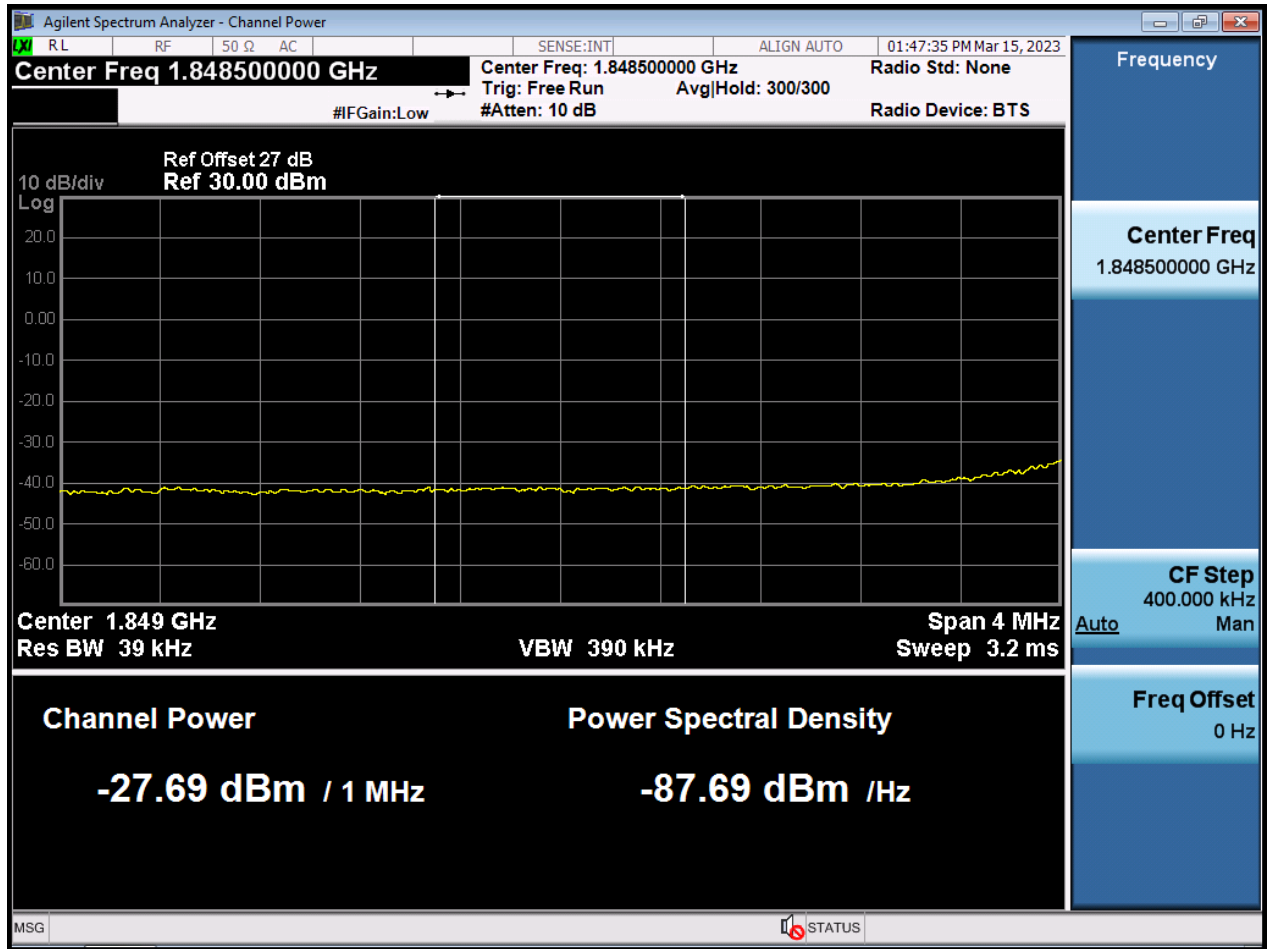

BW20 M_BandEdge_Highest Channel_QPSK_FullRB(1)



BW20 M_BandEdge_Highest Channel_QPSK_FullRB(2)

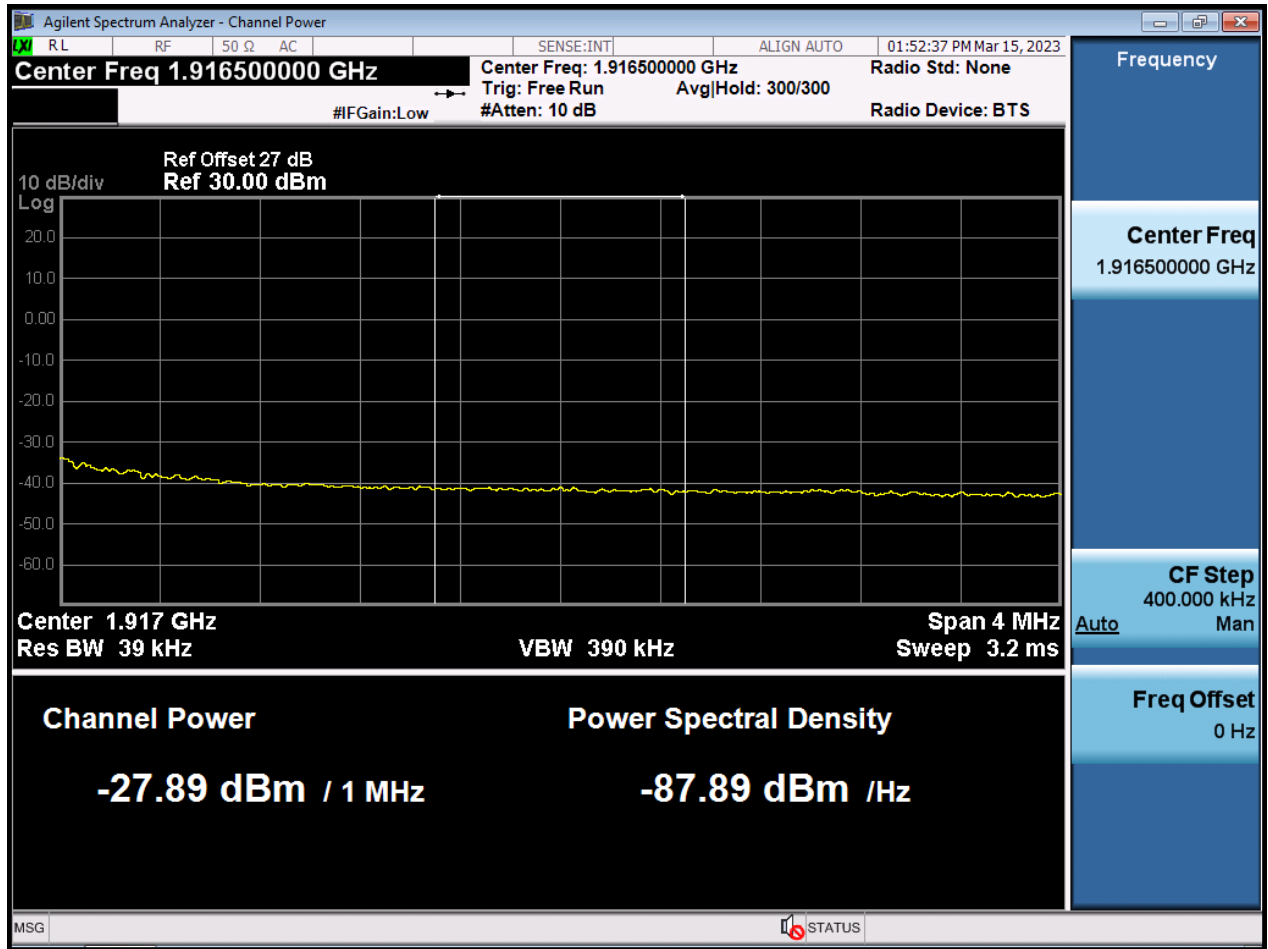


BW20 M_BandEdge_Lowest Channel_QPSK_1RB




BW20 M_BandEdge_Highest Channel_QPSK_1RB




BW1.4 M_OBW_Middle Channel_QPSK_FullRB

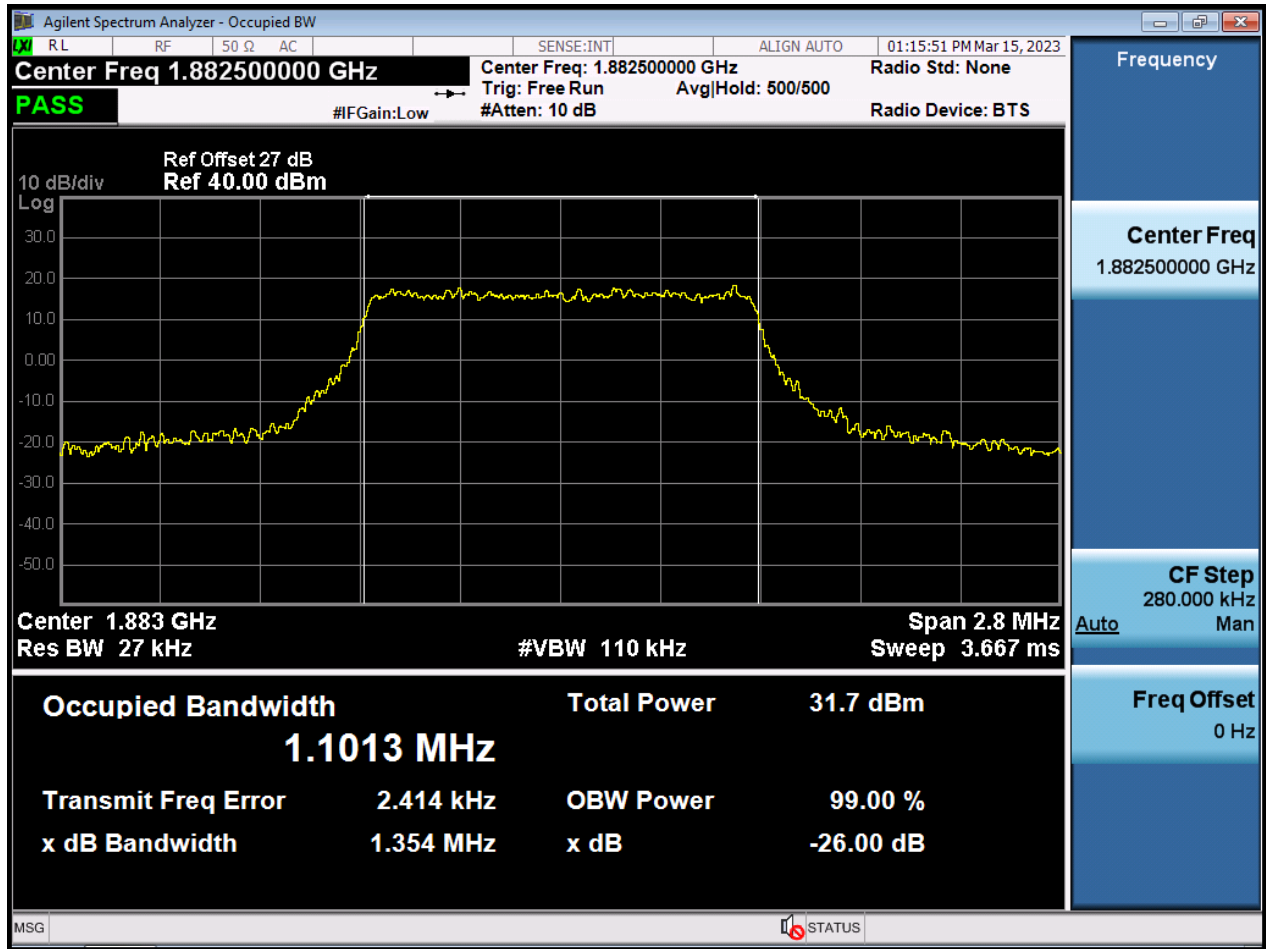


BW1.4 M_OBW_Middle Channel_16QAM_FullIRB

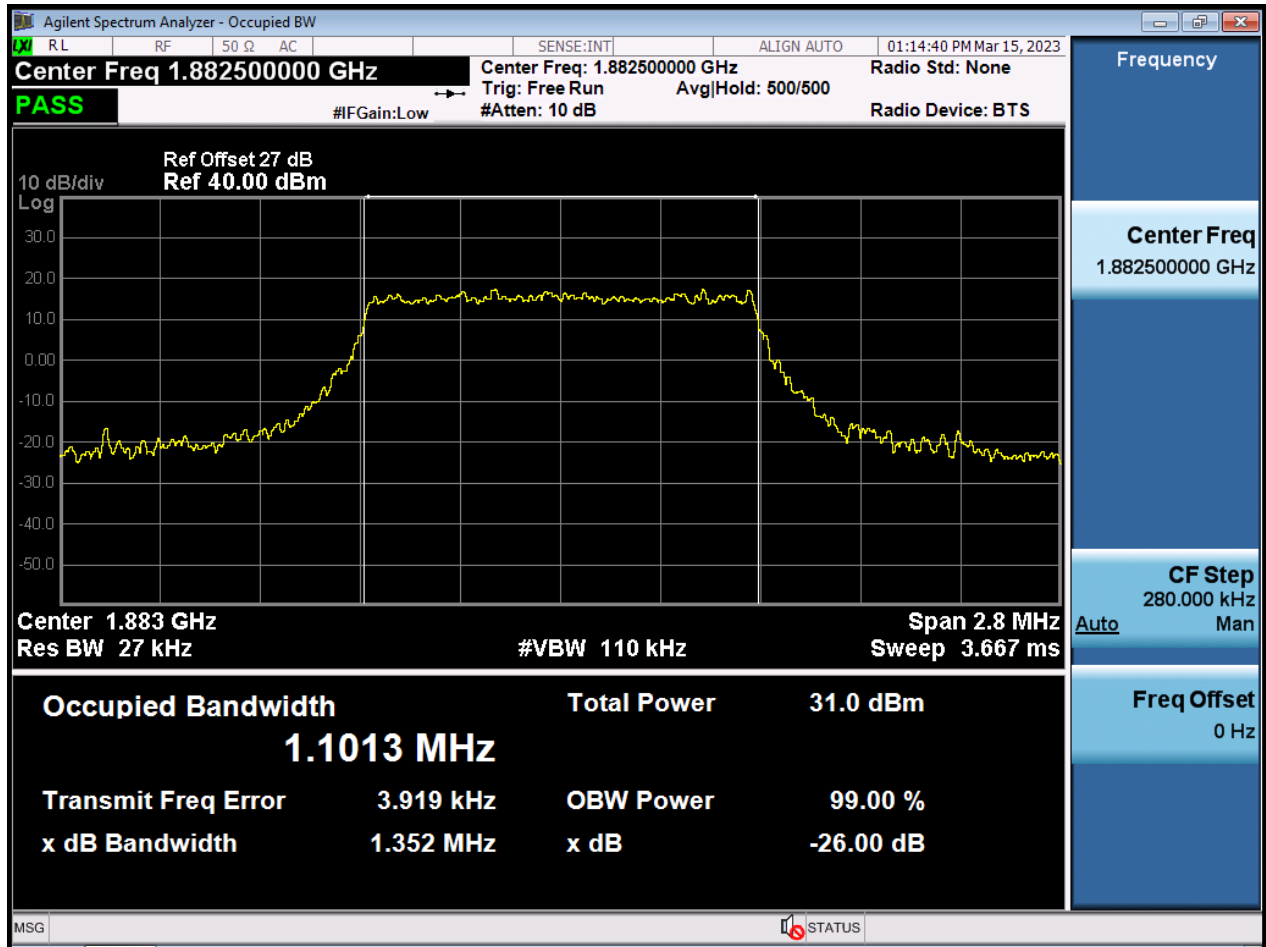


BW1.4 M_OBW_Middle Channel_64QAM_FullIRB

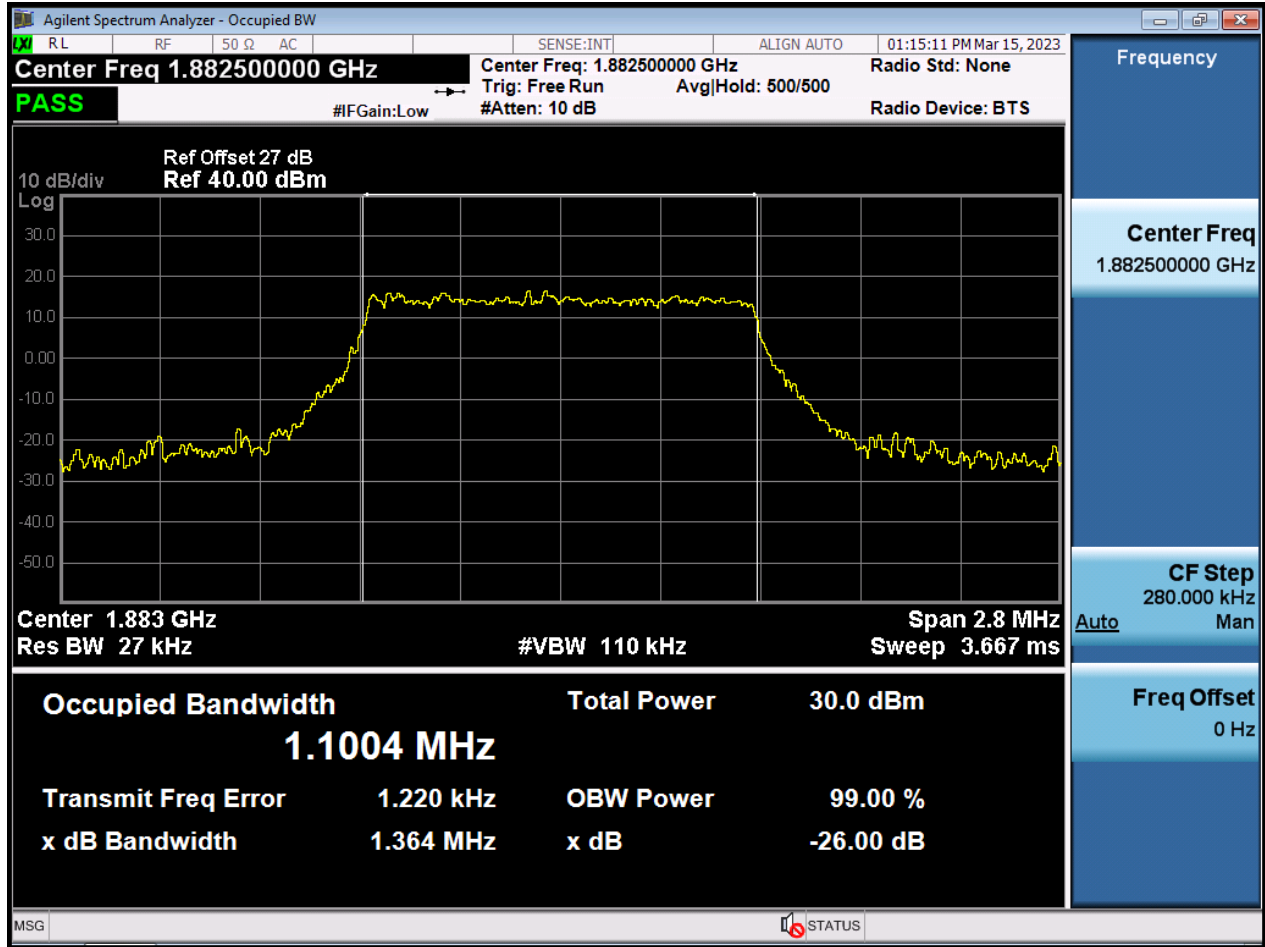


BW1.4 M_OBW_Middle Channel_256QAM_FullRB

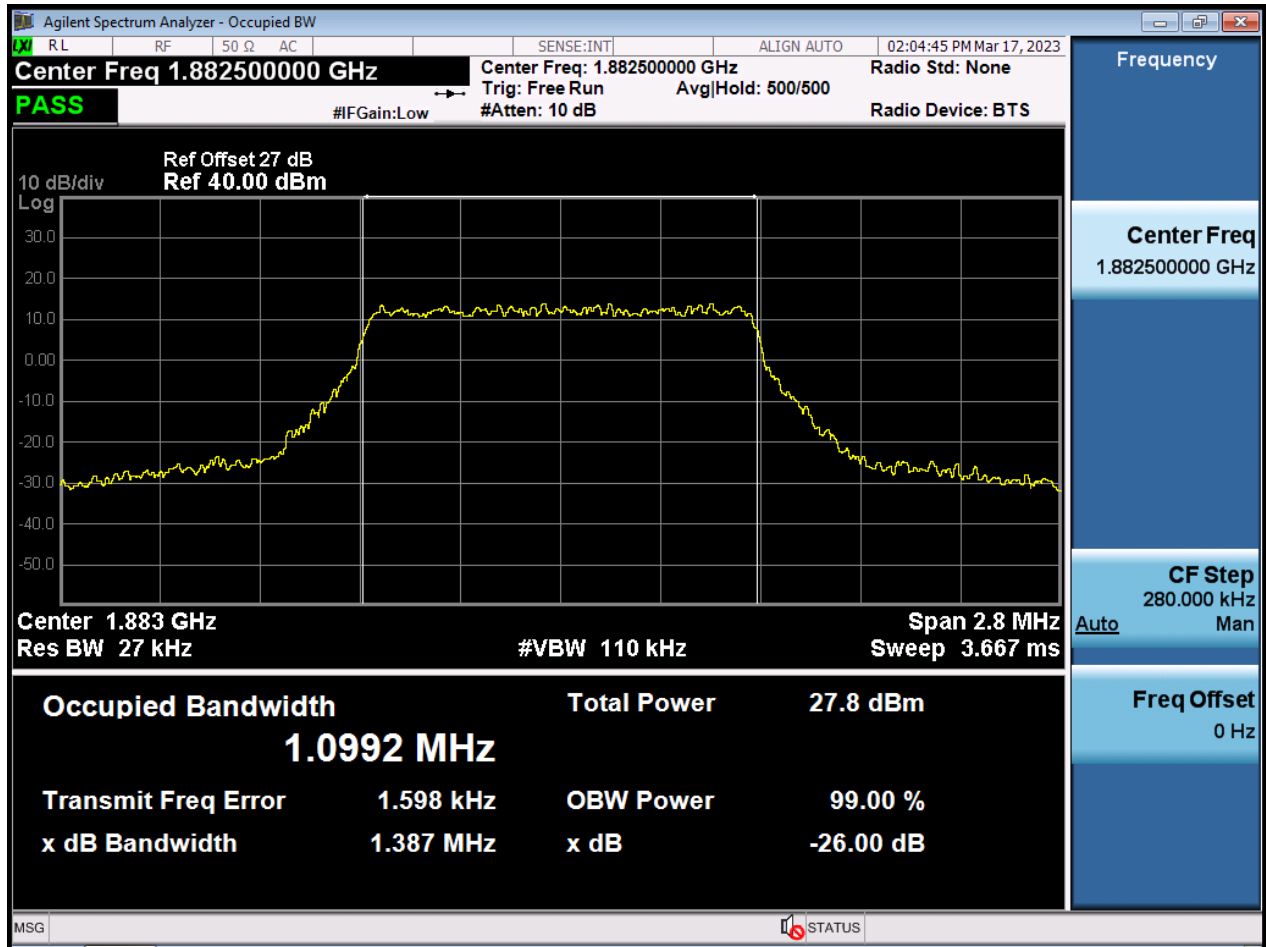


BW3 M_OBW_Middle Channel_QPSK_FullIRB

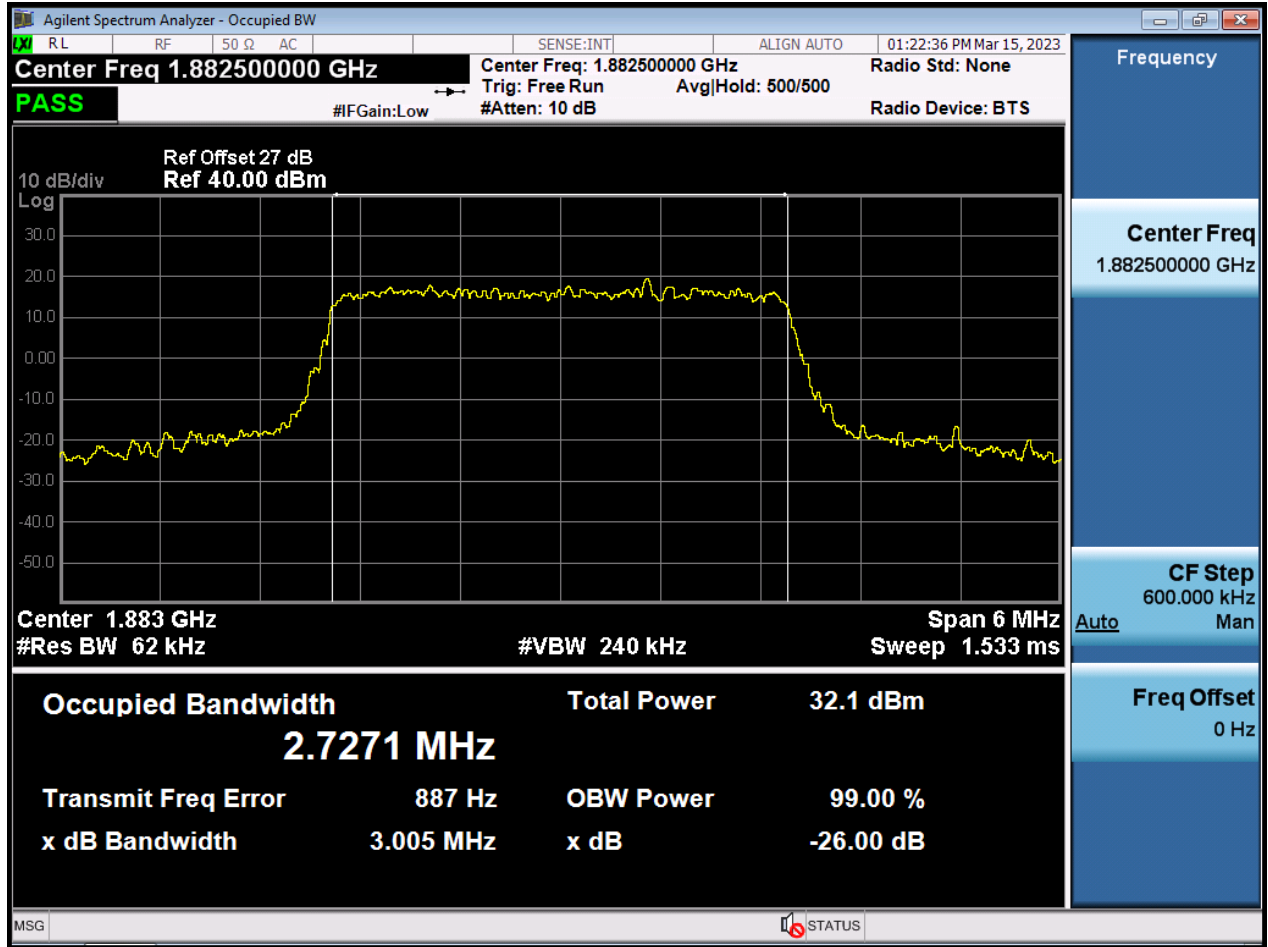


BW3 M_OBW_Middle Channel_16QAM_FullRB

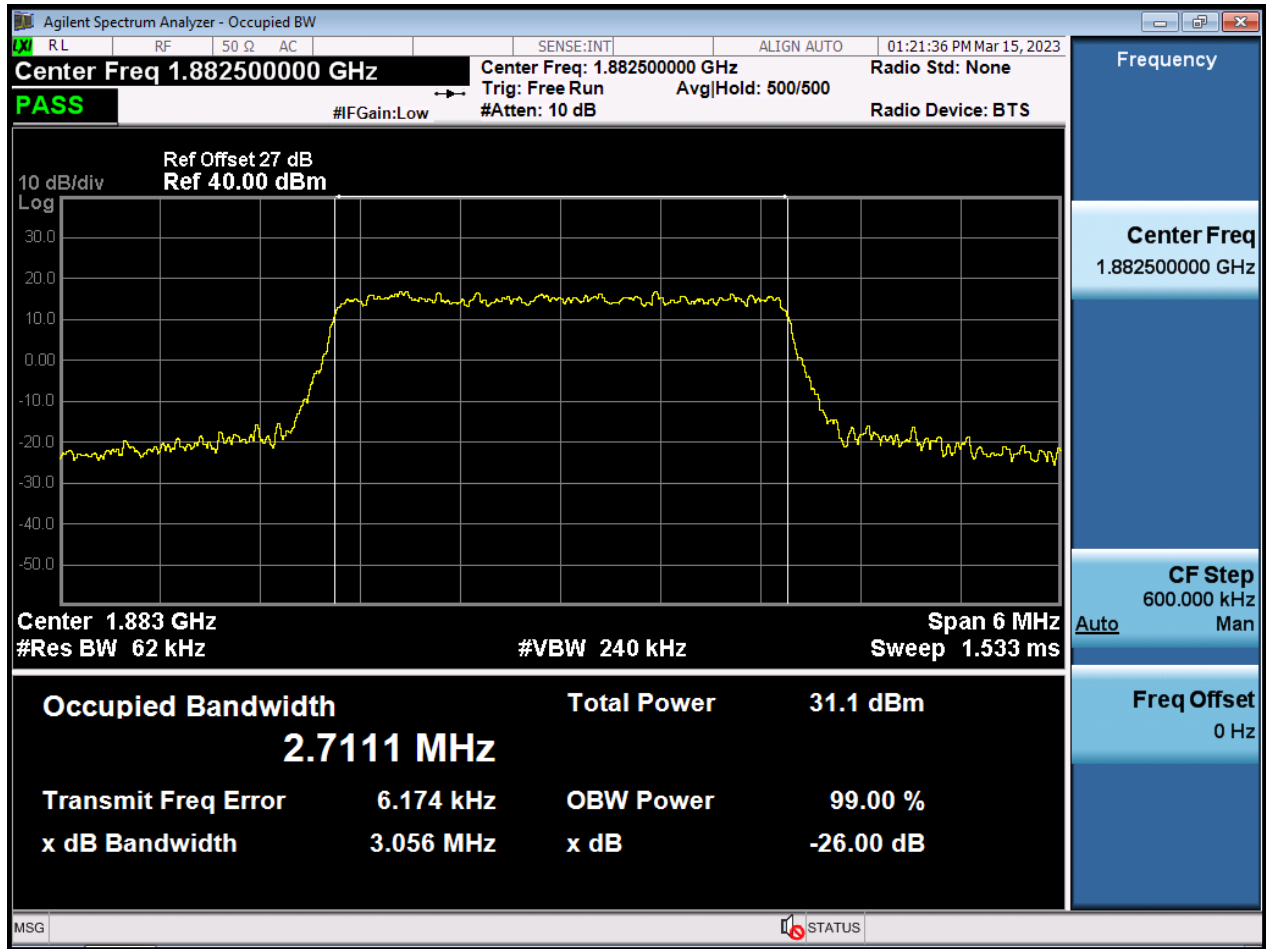


BW3 M_OBW_Middle Channel_64QAM_FullRB

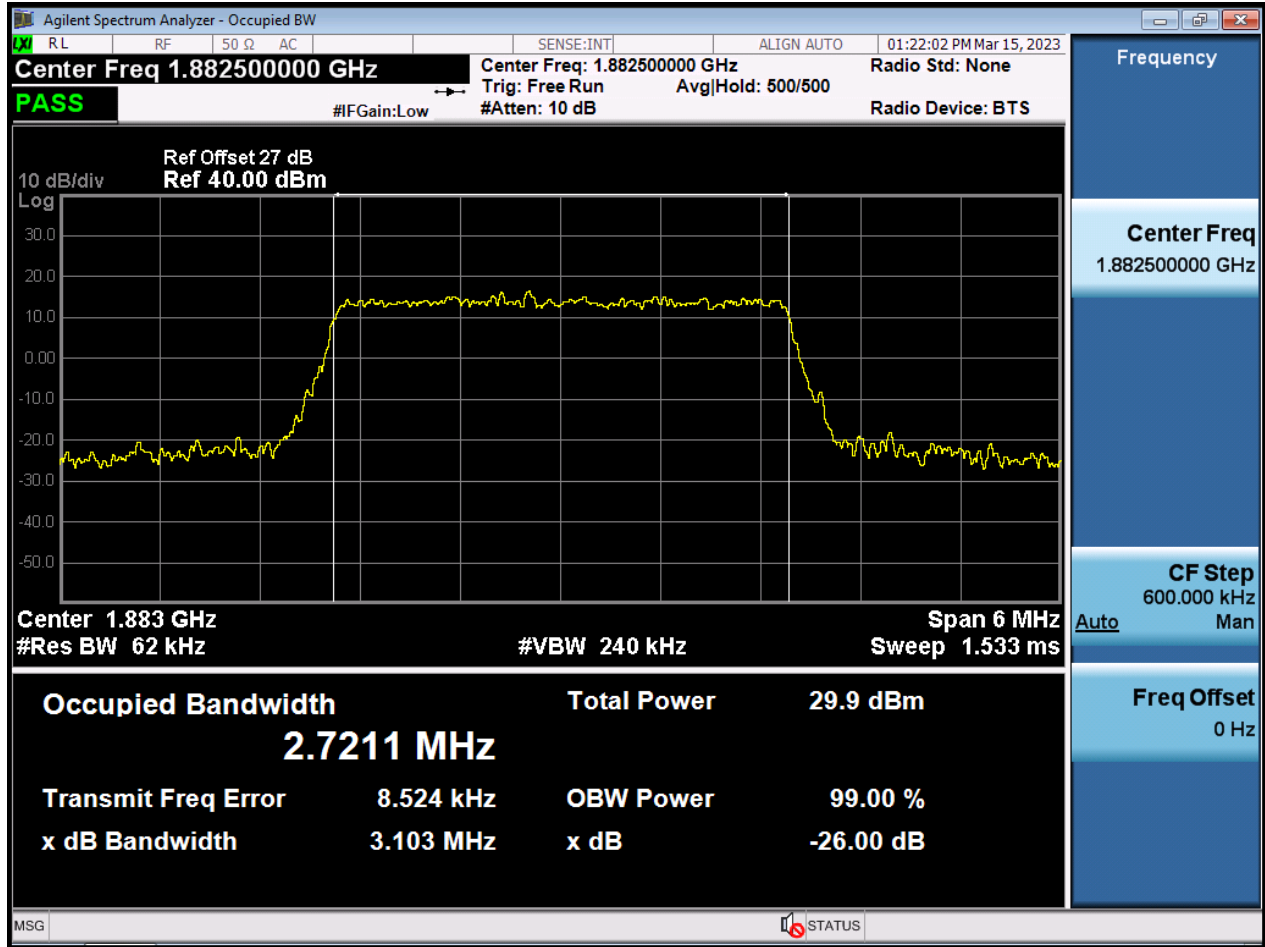


BW3 M_OBW_Middle Channel_256QAM_FullIRB

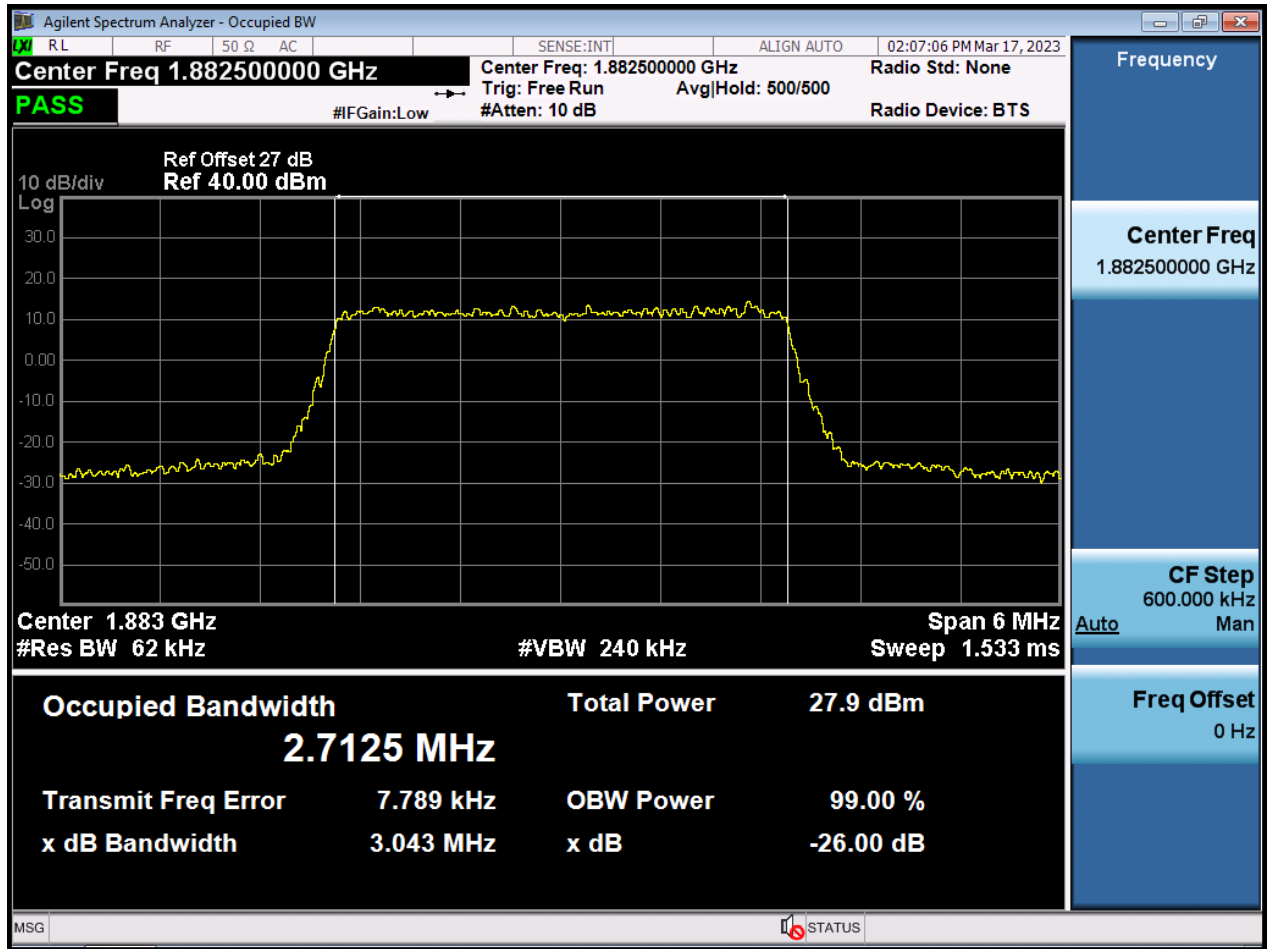


BW5 M_OBW_Middle Channel_QPSK_FullIRB

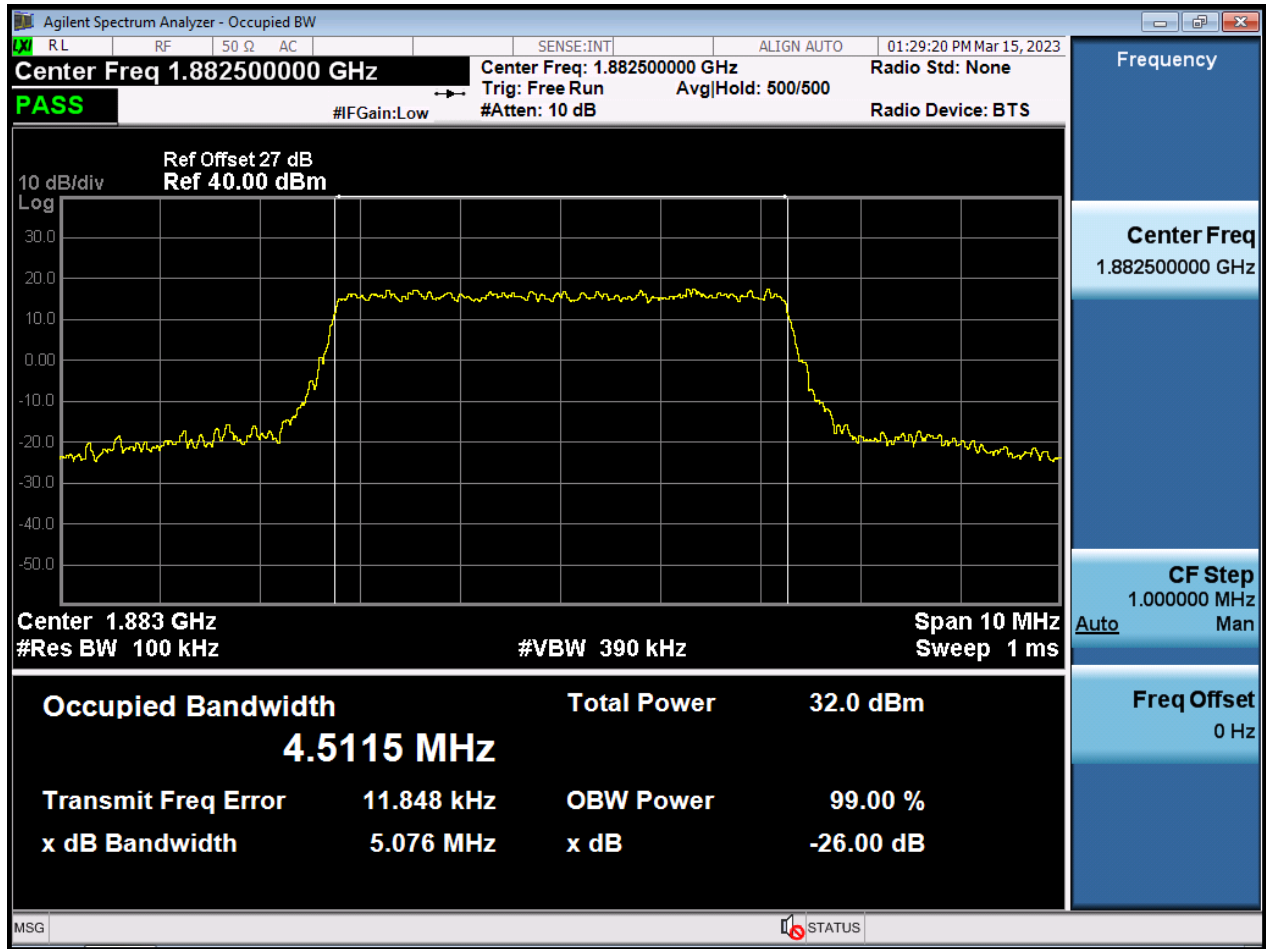


BW5 M_OBW_Middle Channel_16QAM_FullRB

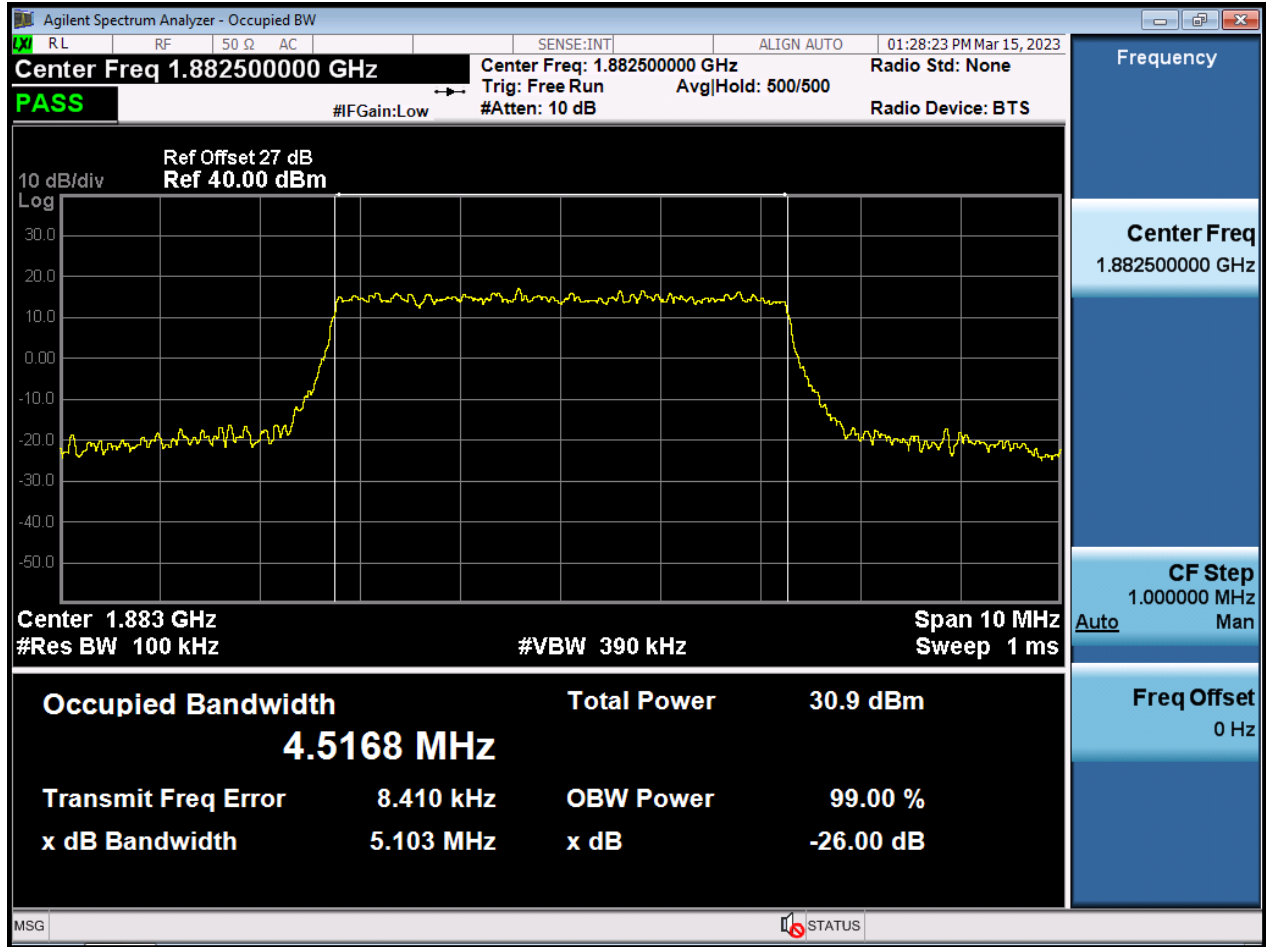


BW5 M_OBW_Middle Channel_64QAM_FullRB

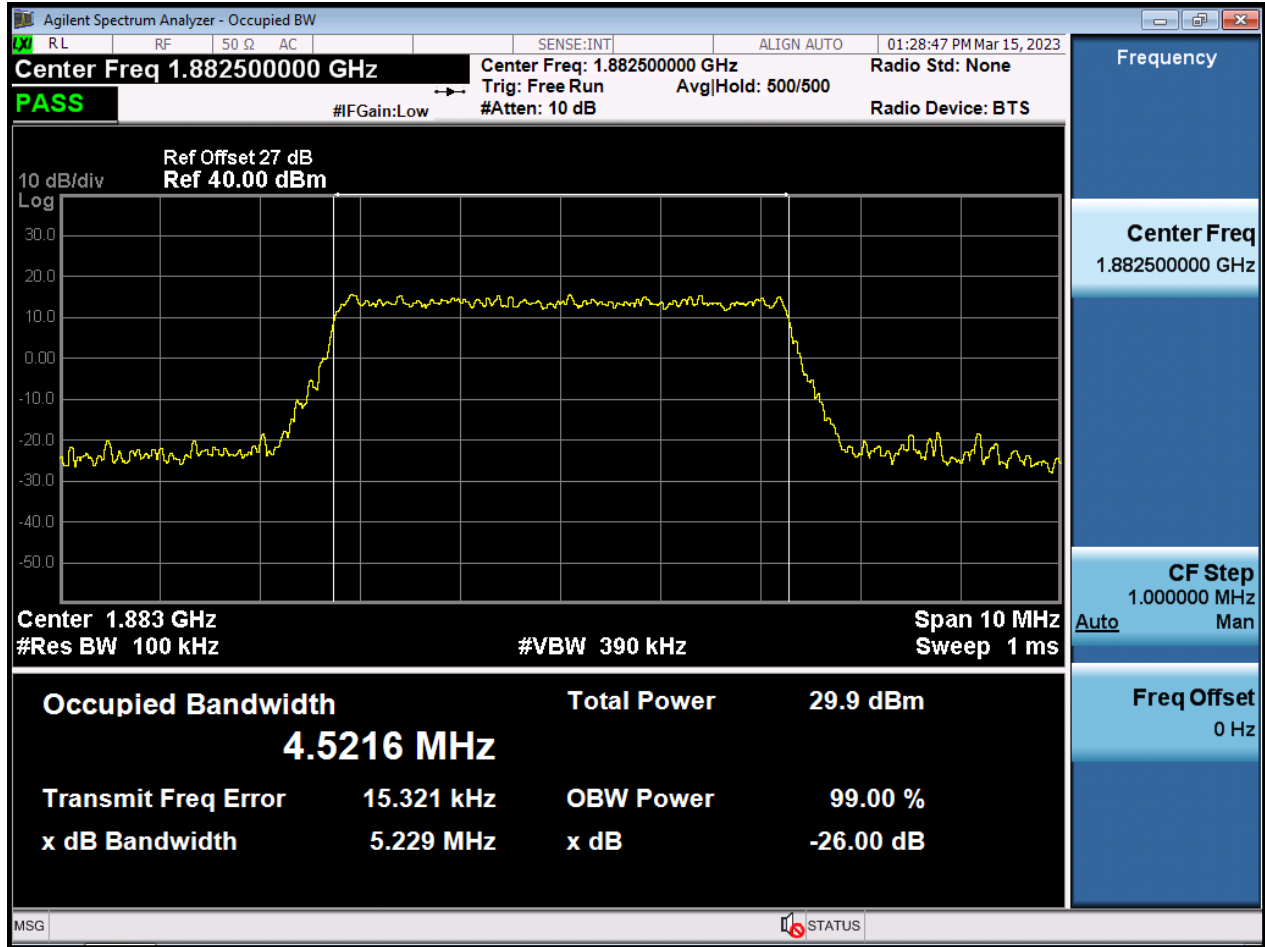


BW5 M_OBW_Middle Channel_256QAM_FullIRB

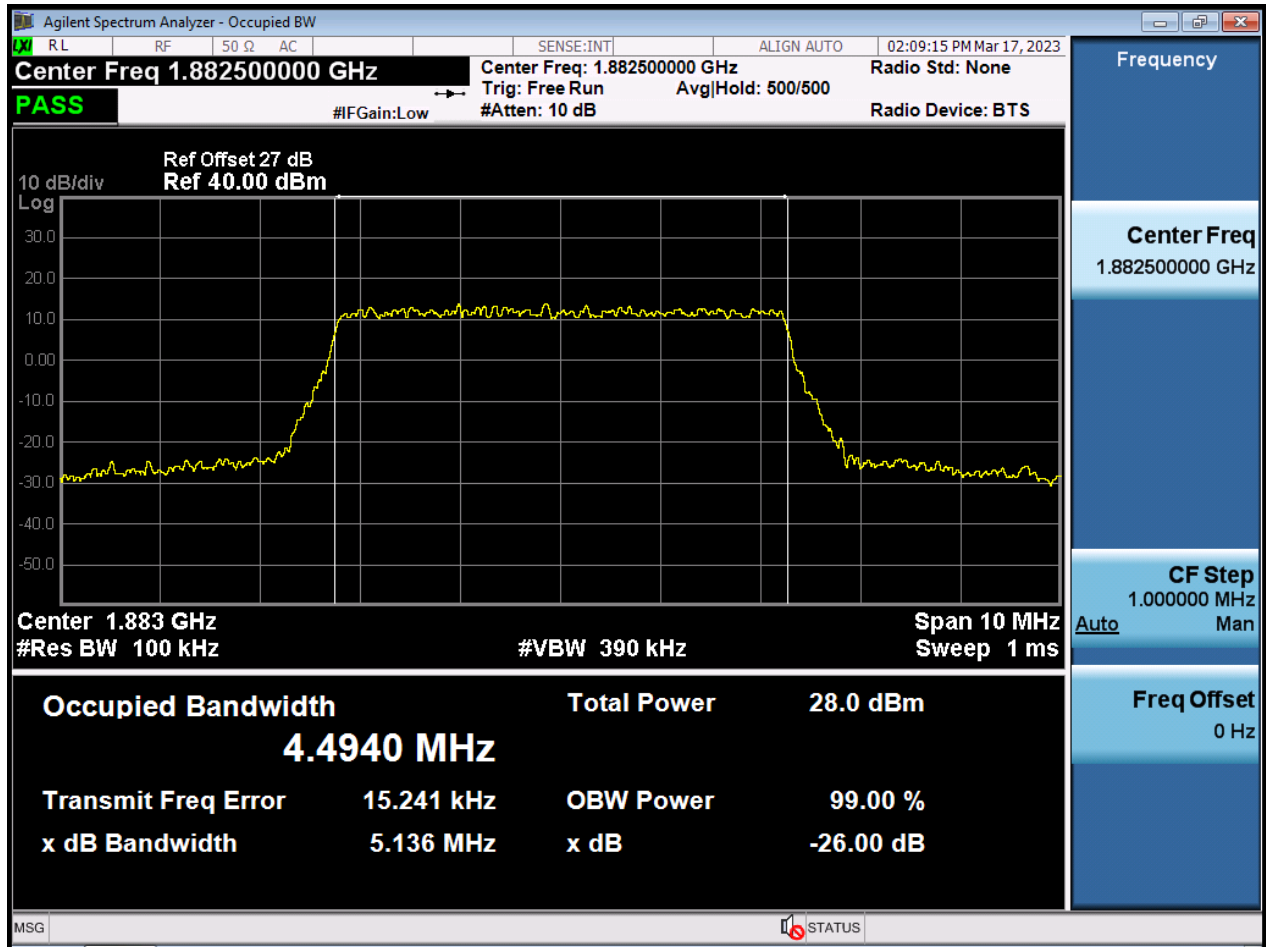


BW10 M_OBW_Middle Channel_QPSK_FullRB

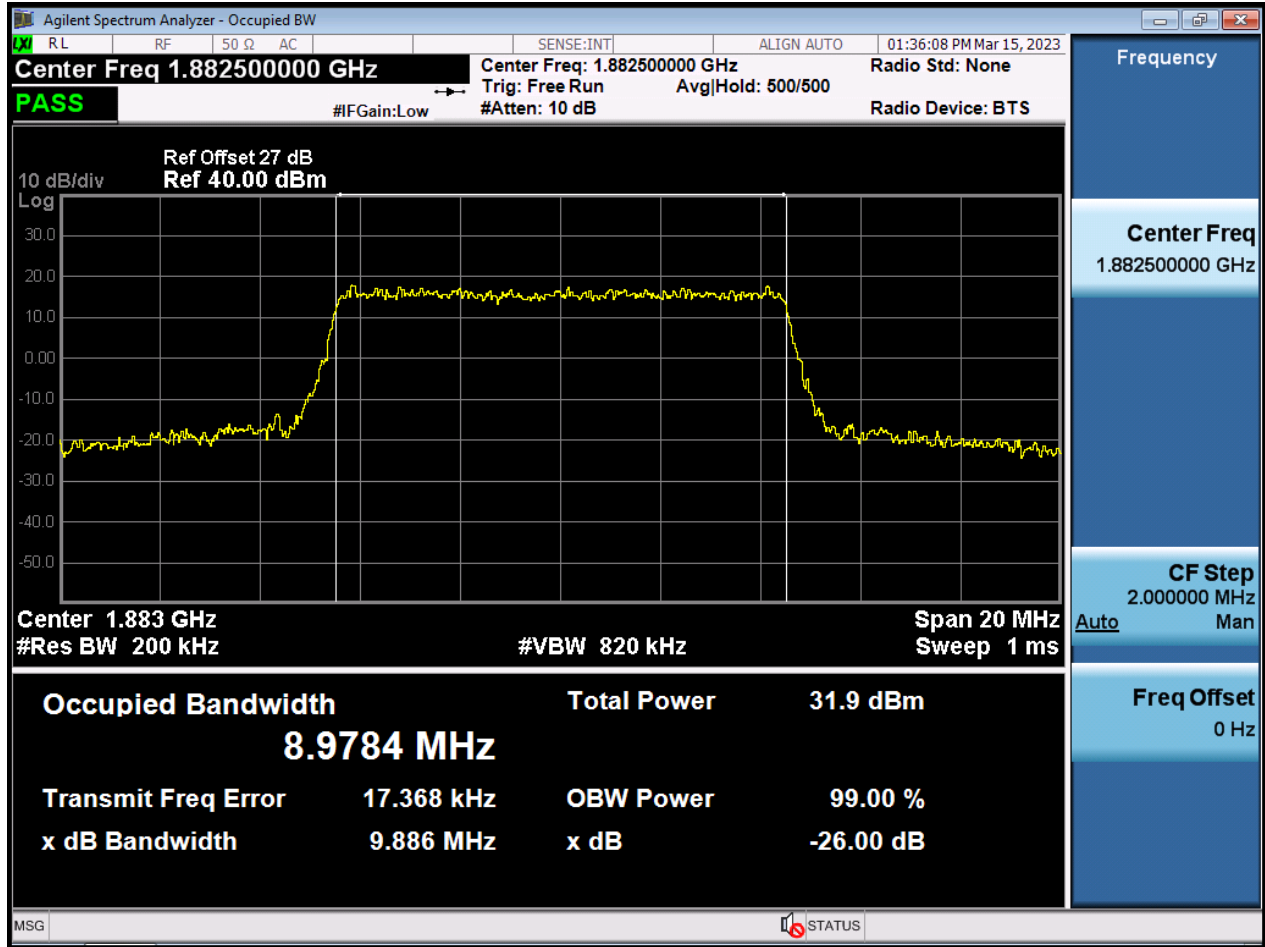


BW10 M_OBW_Middle Channel_16QAM_FullIRB

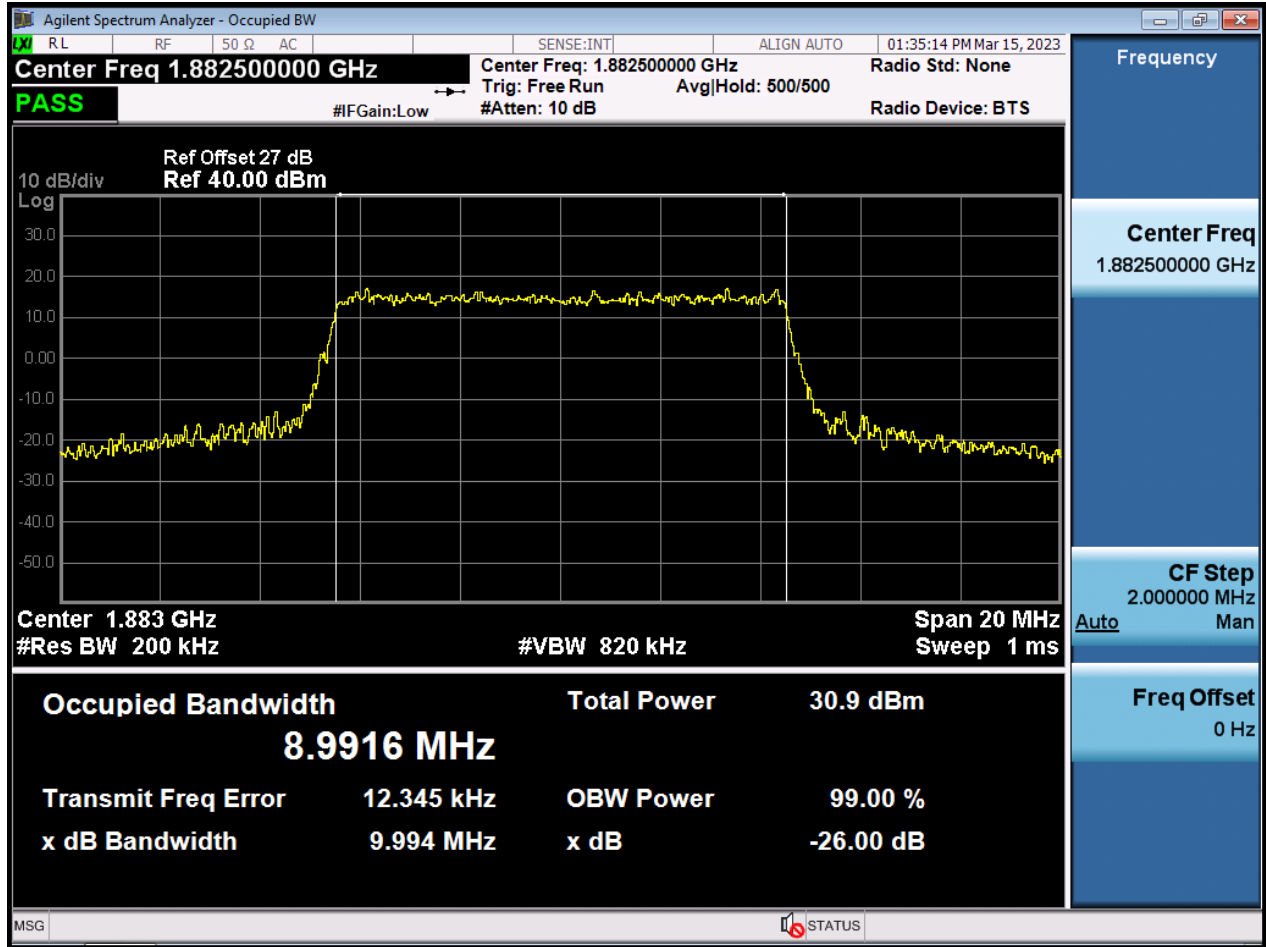


BW10 M_OBW_Middle Channel_64QAM_FullIRB

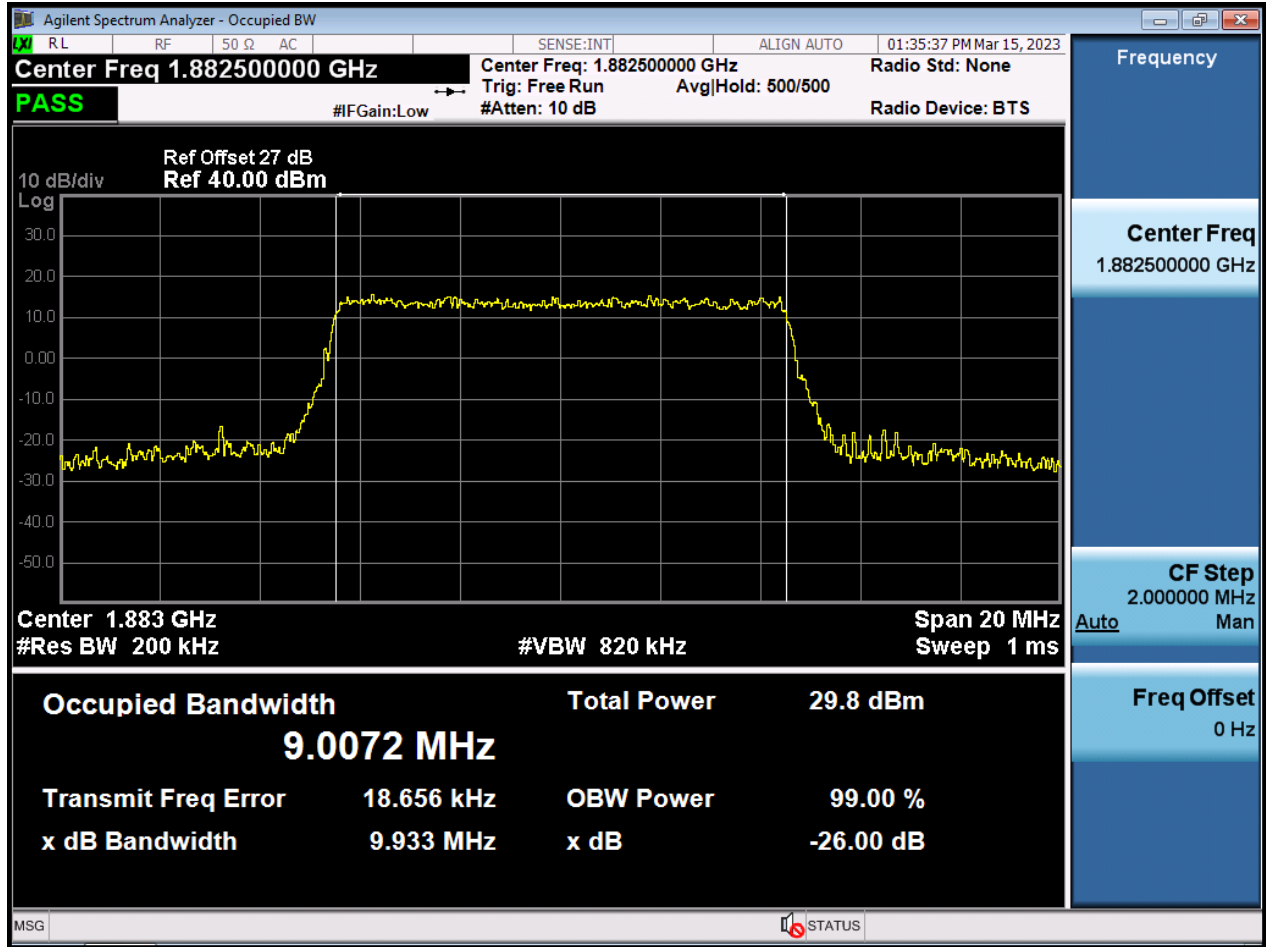


BW10 M_OBW_Middle Channel_256QAM_FullIRB

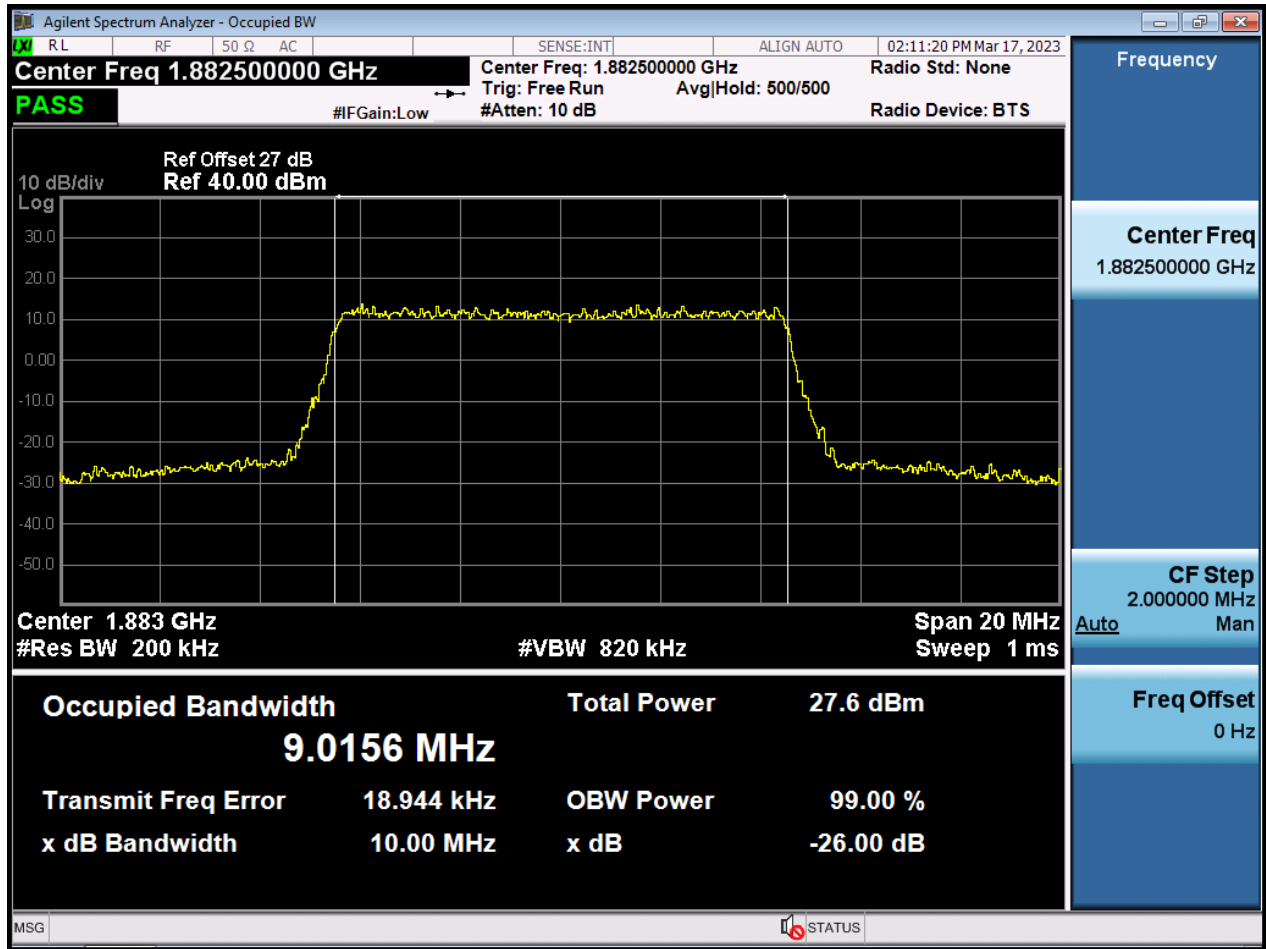


BW15 M_OBW_Middle Channel_QPSK_FullRB

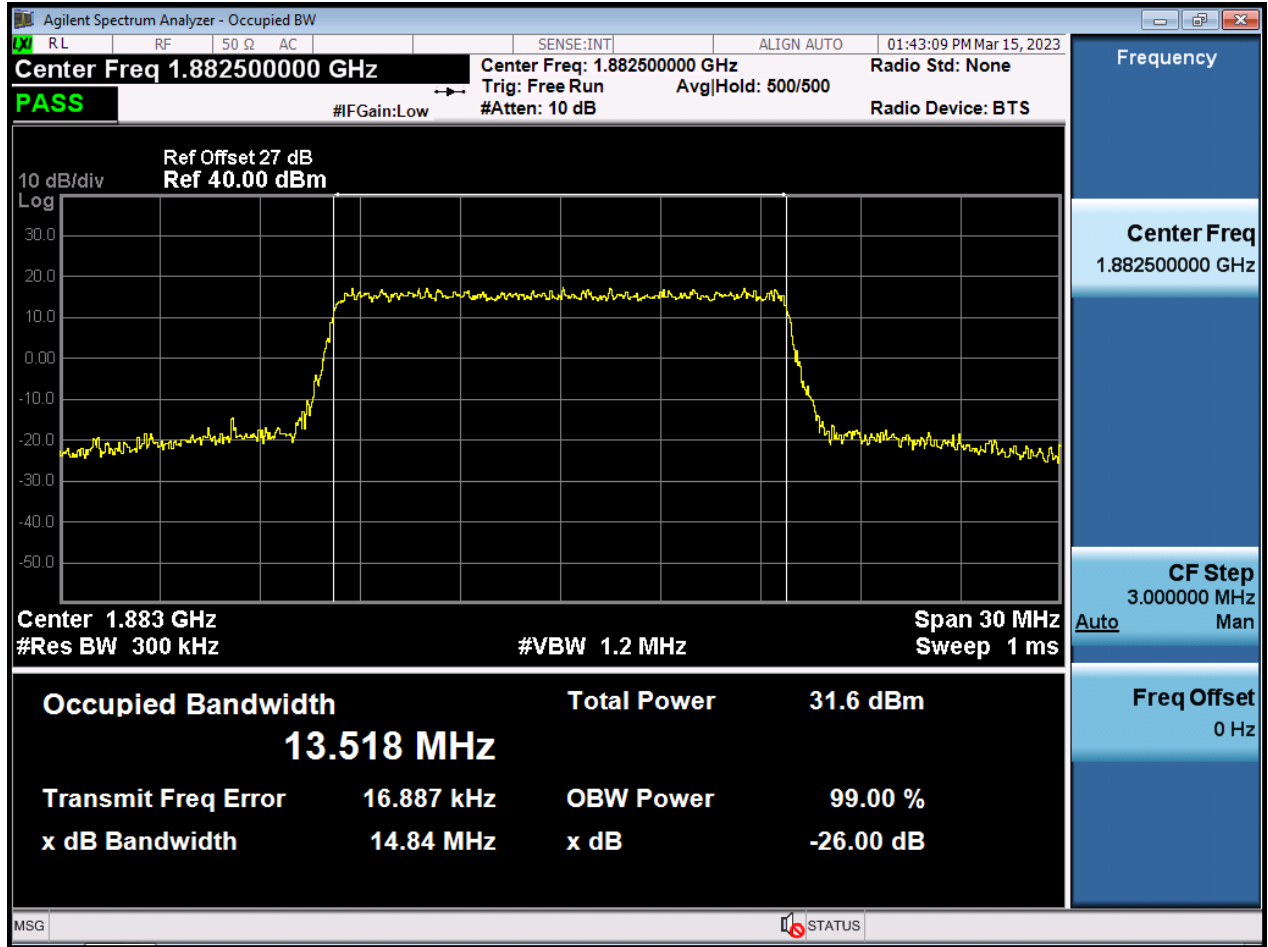


BW15 M_OBW_Middle Channel_16QAM_FullIRB

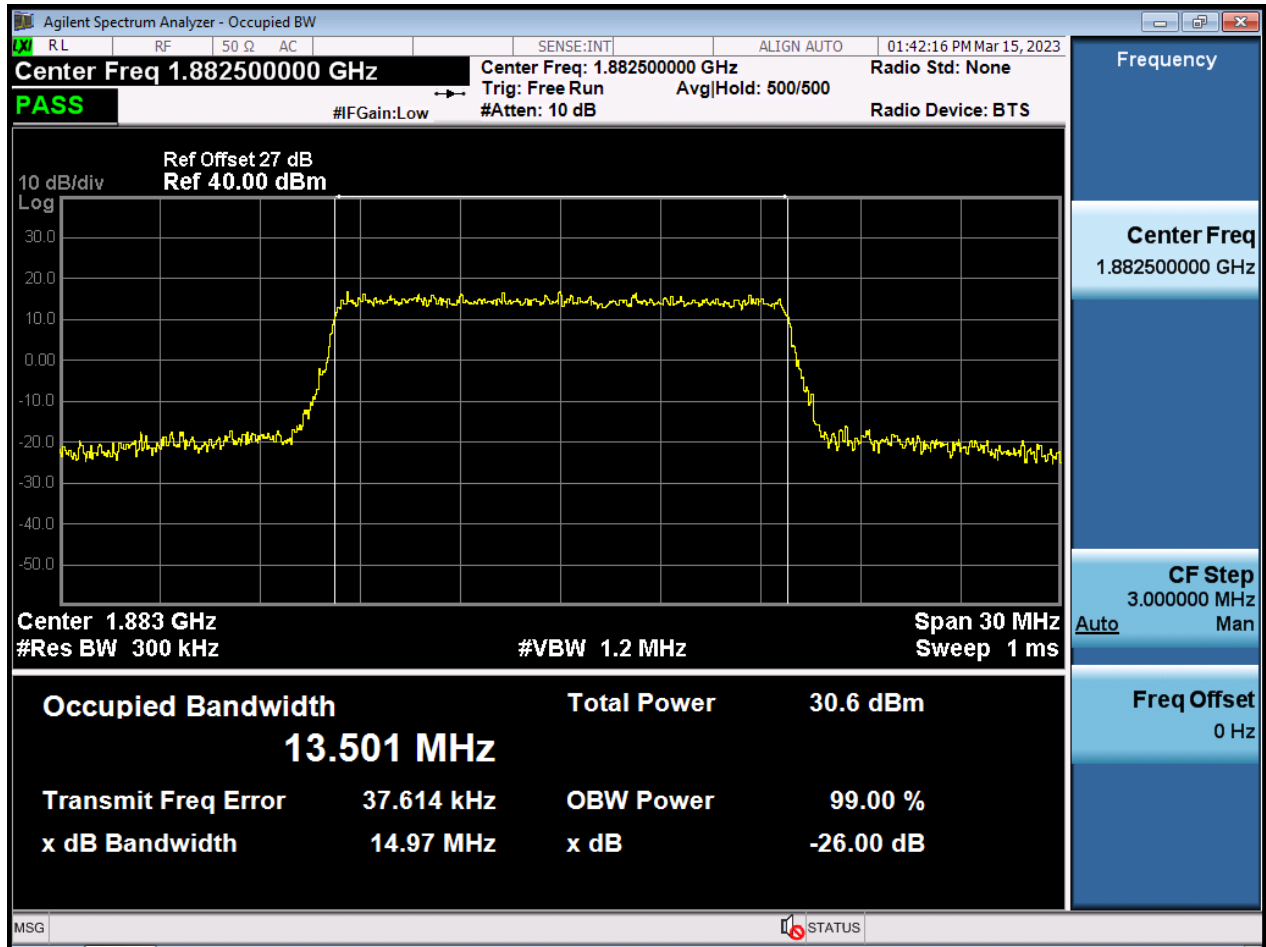


BW15 M_OBW_Middle Channel_64QAM_FullIRB

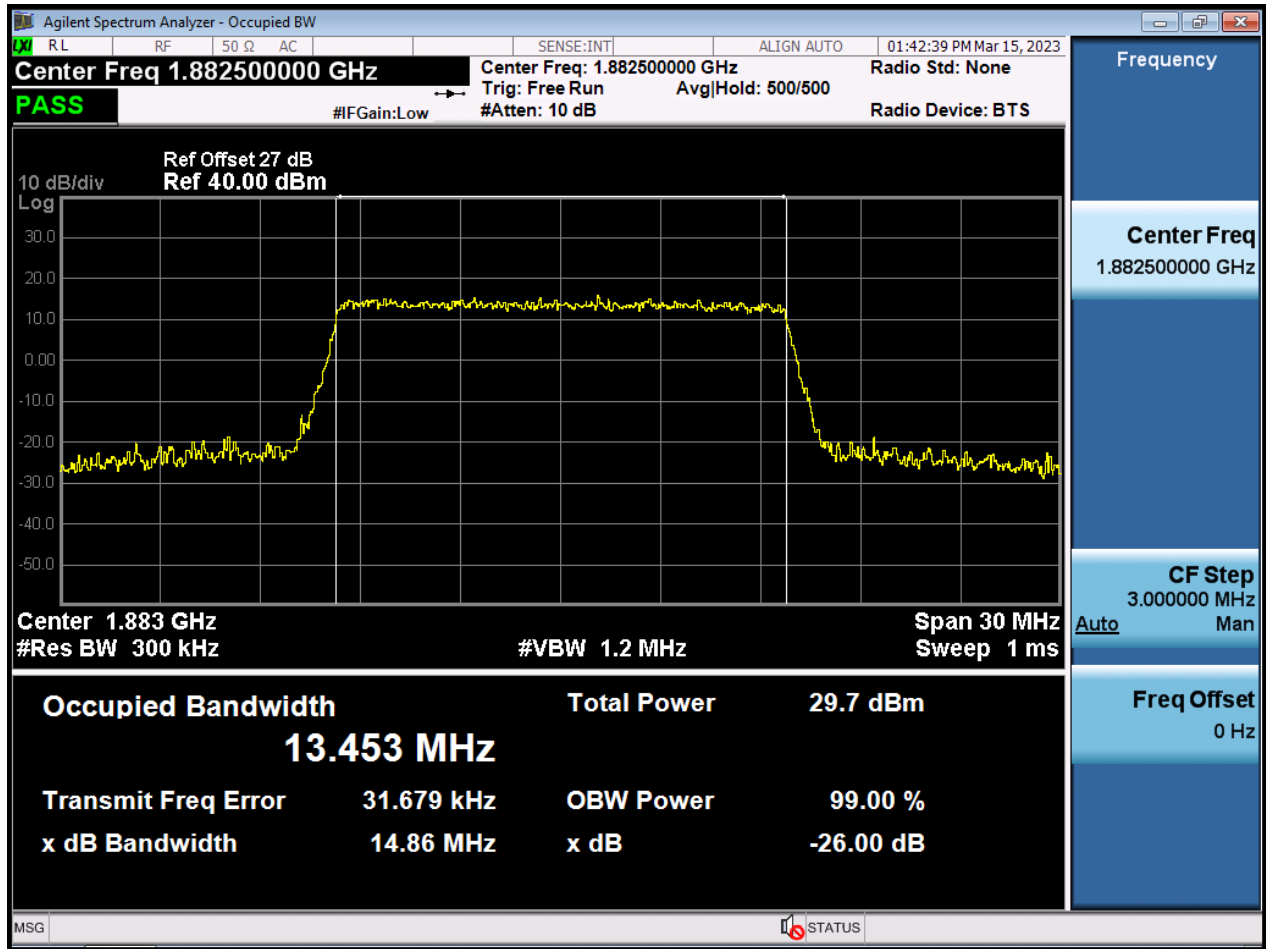


BW15 M_OBW_Middle Channel_256QAM_FullIRB

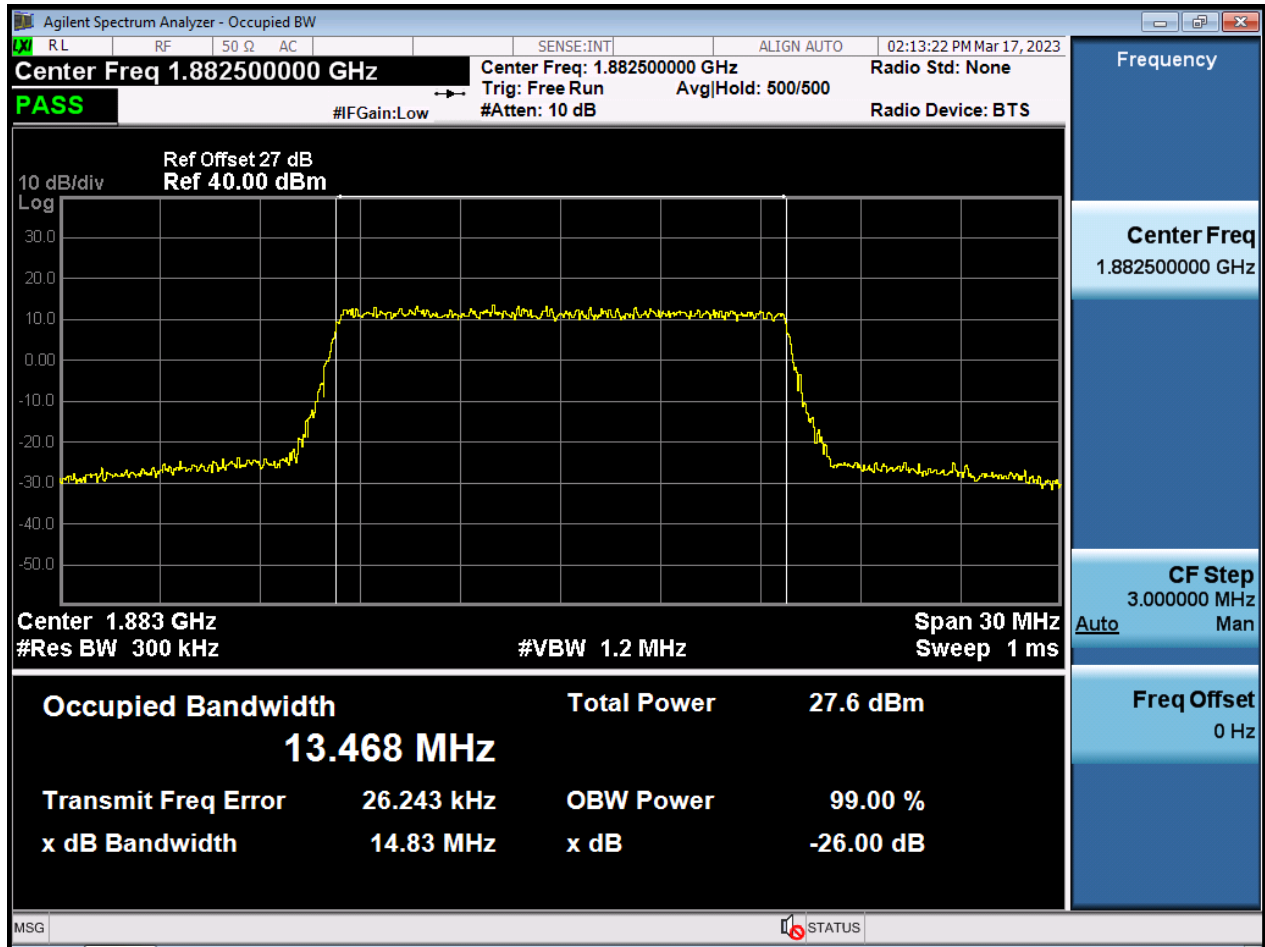


BW20 M_OBW_Middle Channel_QPSK_FullRB

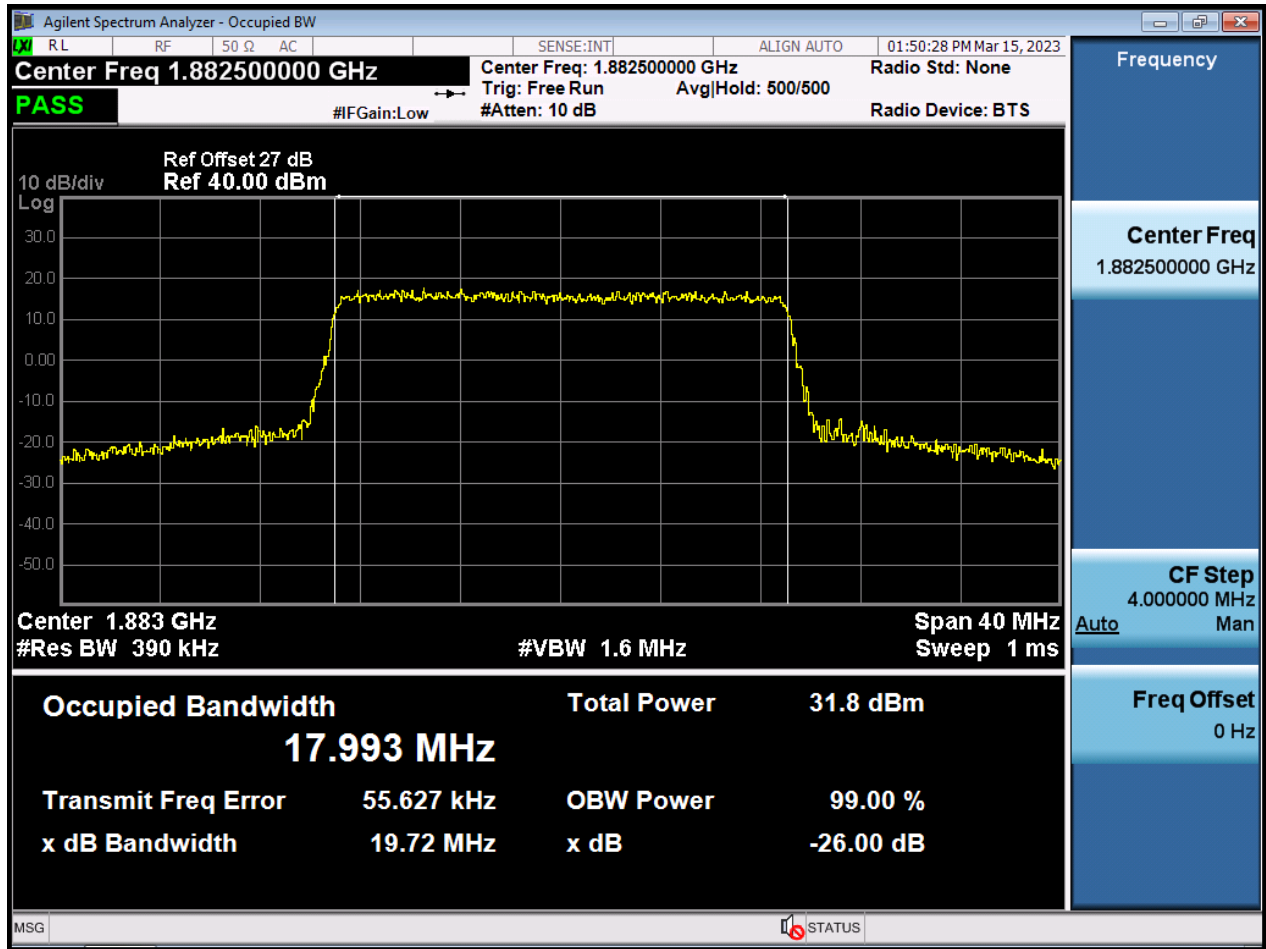


BW20 M_OBW_Middle Channel_16QAM_FullIRB

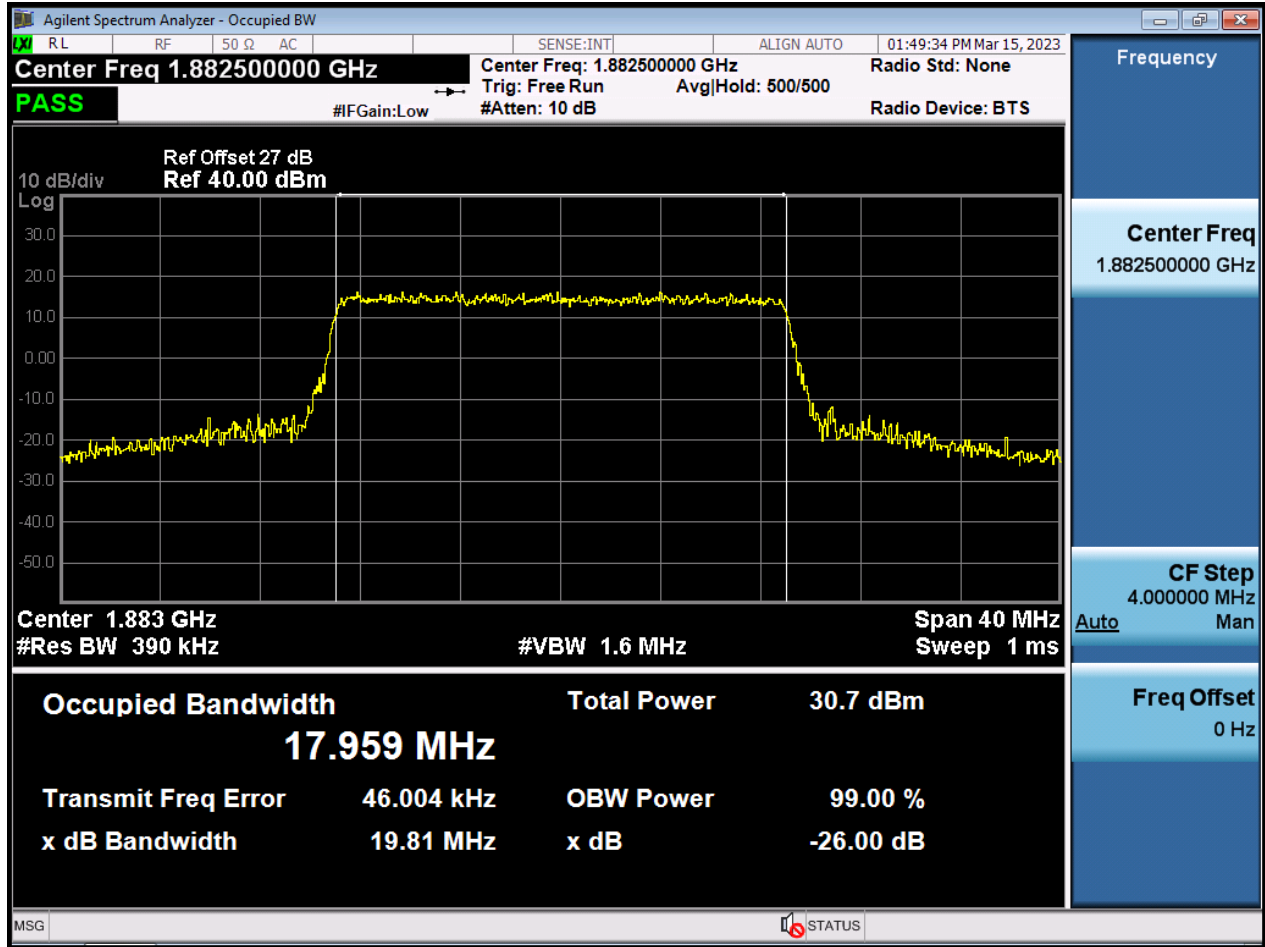


BW20 M_OBW_Middle Channel_64QAM_FullIRB

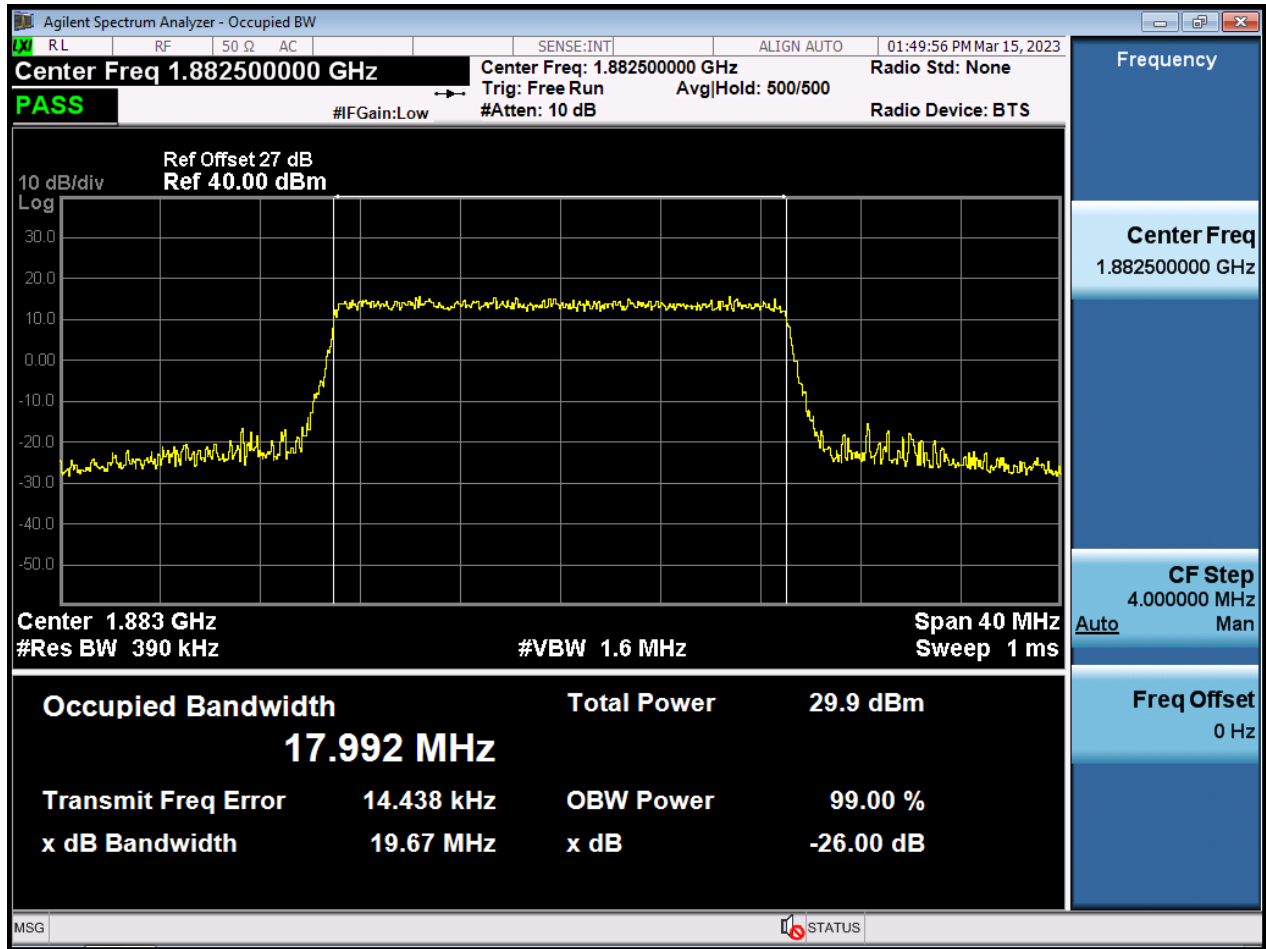


BW20 M_OBW_Middle Channel_256QAM_FullIRB

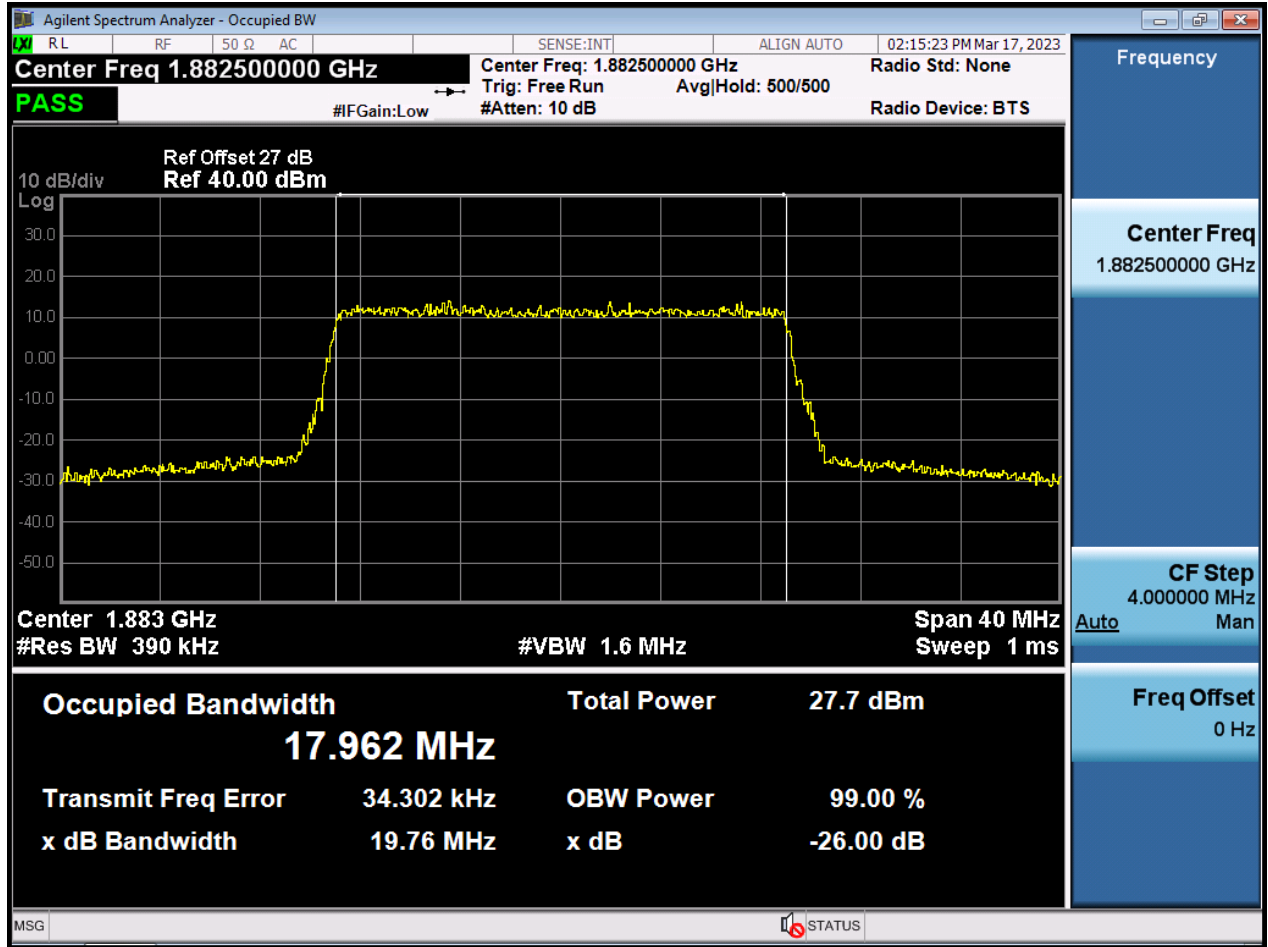


BW1.4 M_PAR_Middle Channel_QPSK_FullIRB

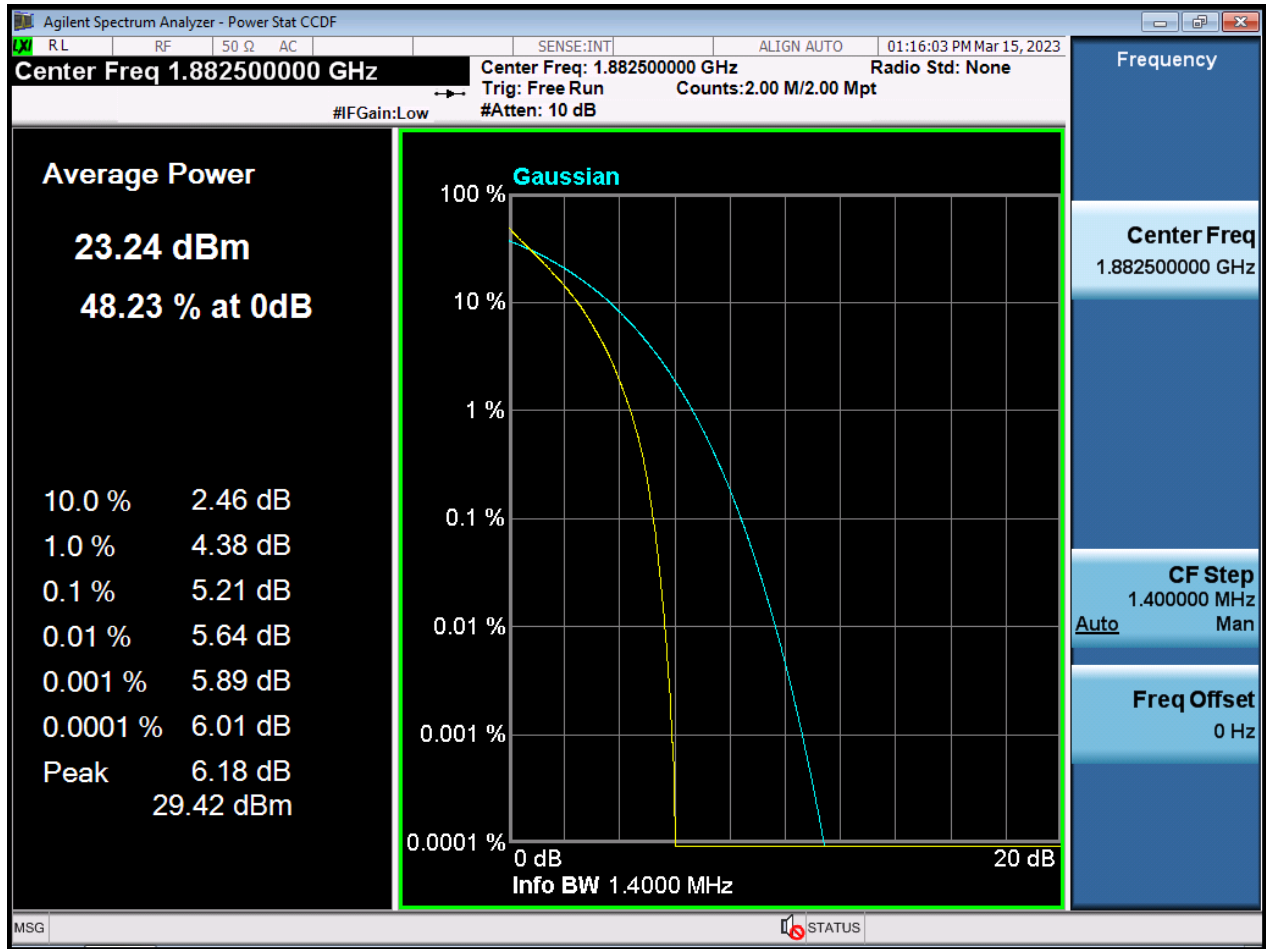


BW1.4 M_PAR_Middle Channel_16QAM_FullIRB

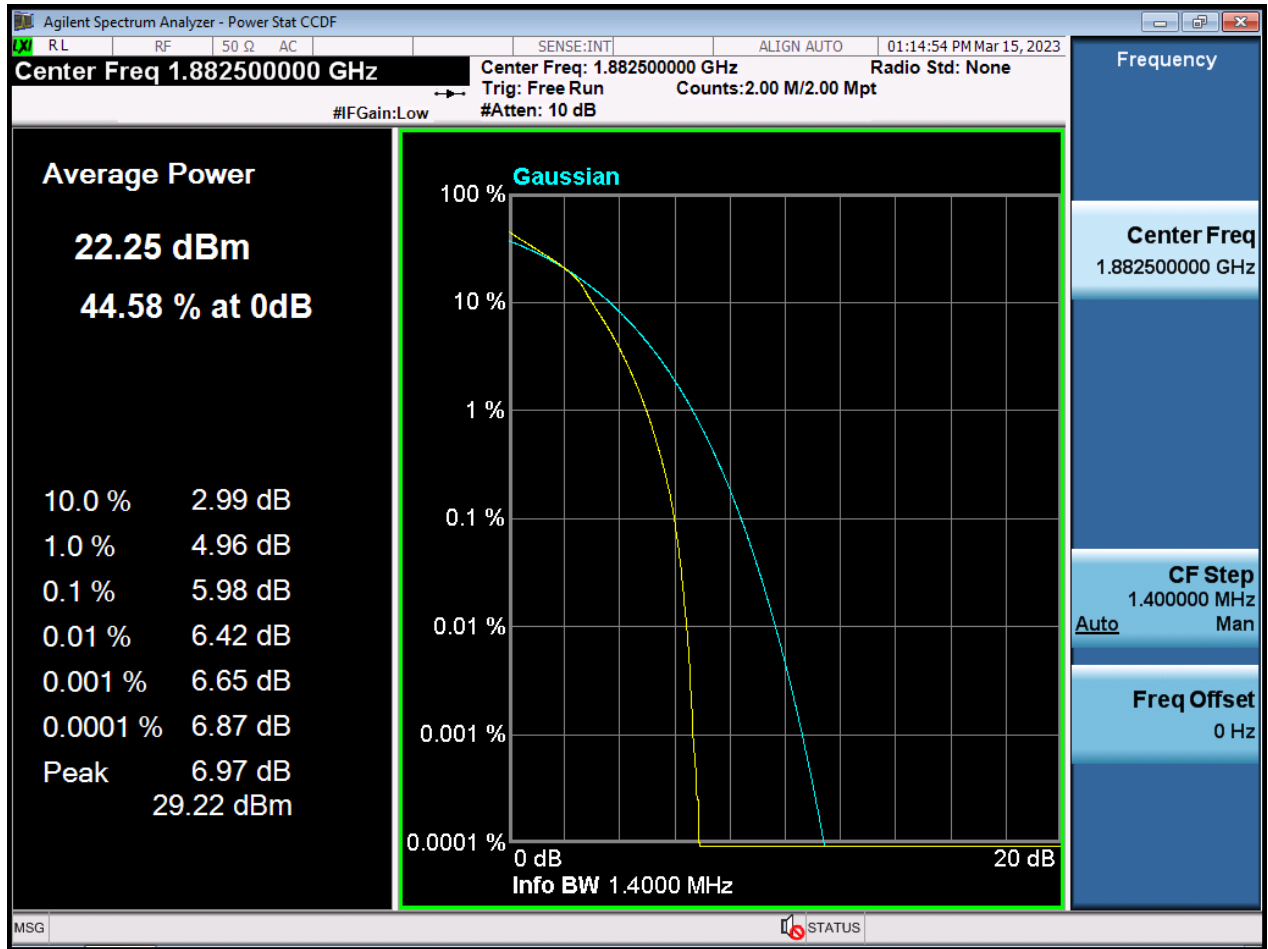


BW1.4 M_PAR_Middle Channel_64QAM_FullIRB

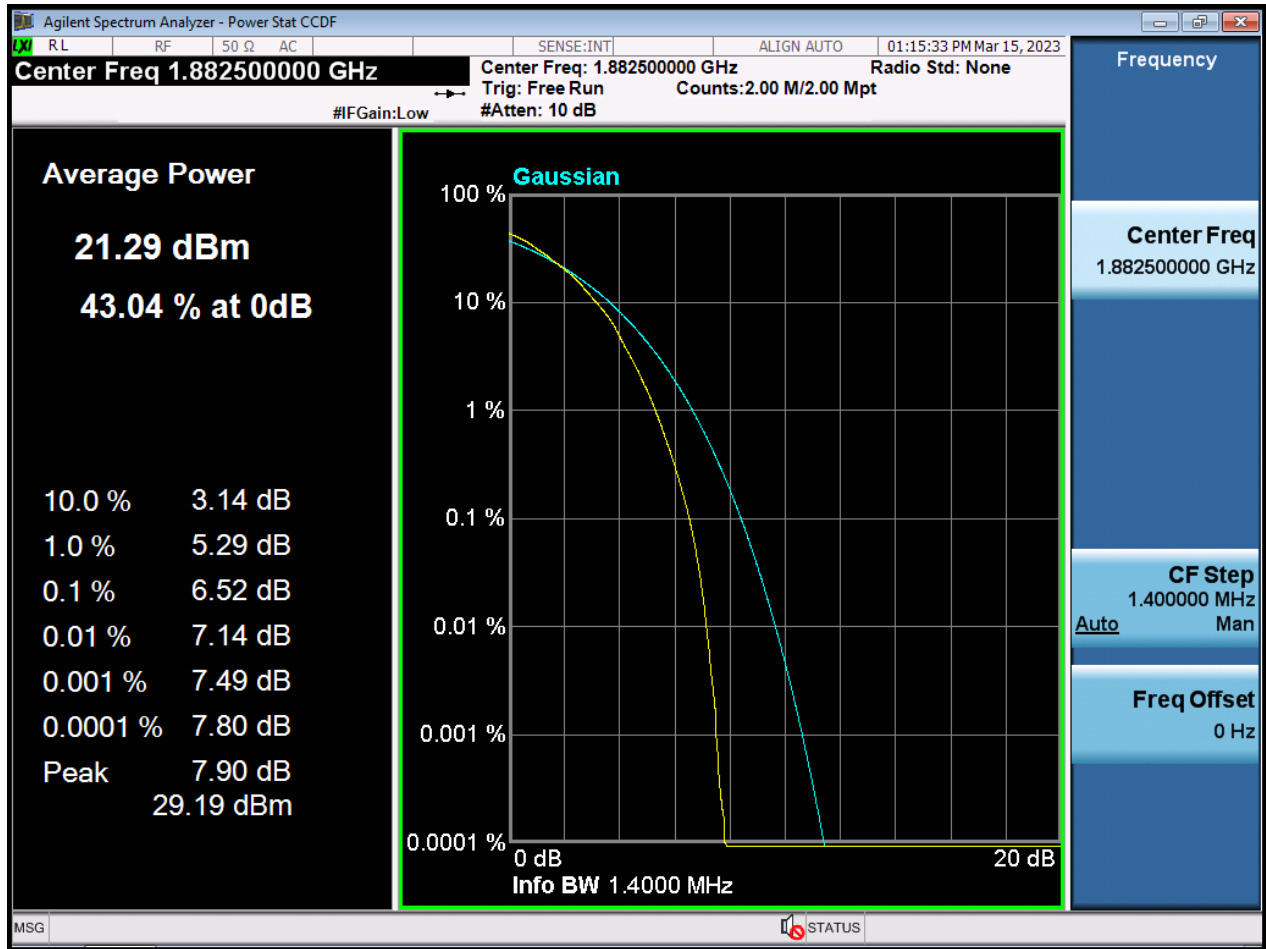


BW1.4 M_PAR_Middle Channel_256QAM_FullRB

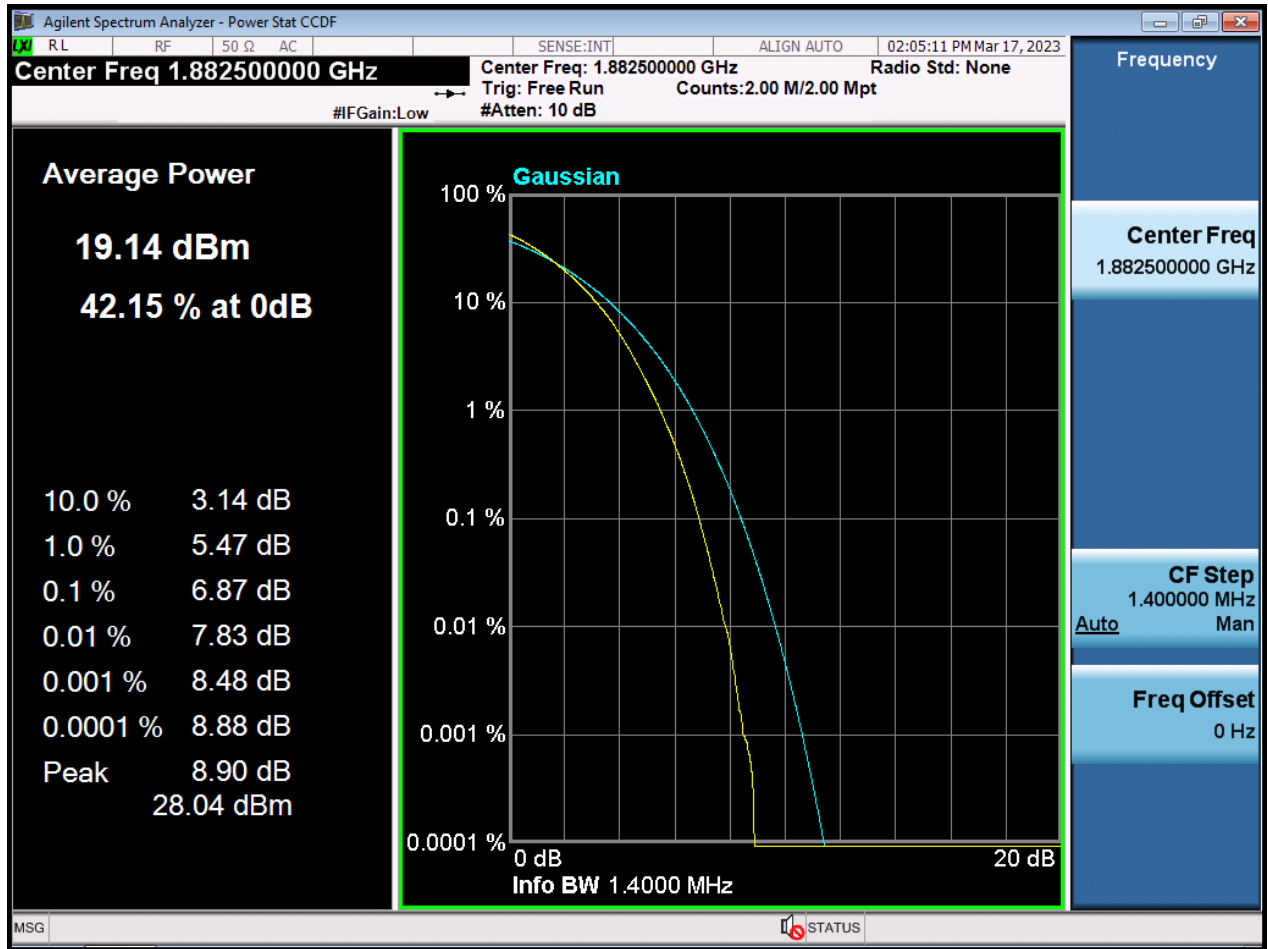


BW3 M_PAR_Middle Channel_QPSK_FullIRB

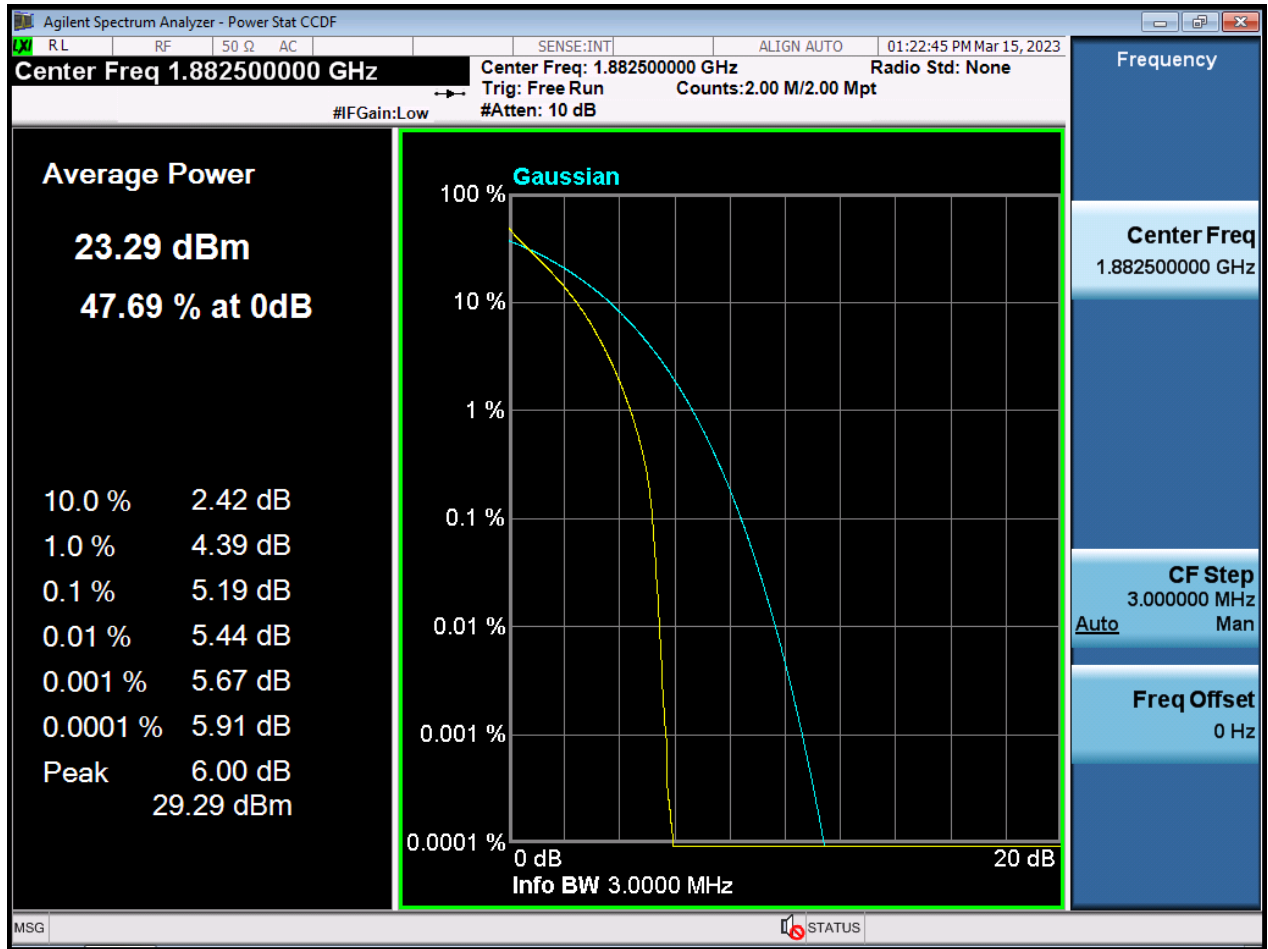


BW3 M_PAR_Middle Channel_16QAM_FullRB

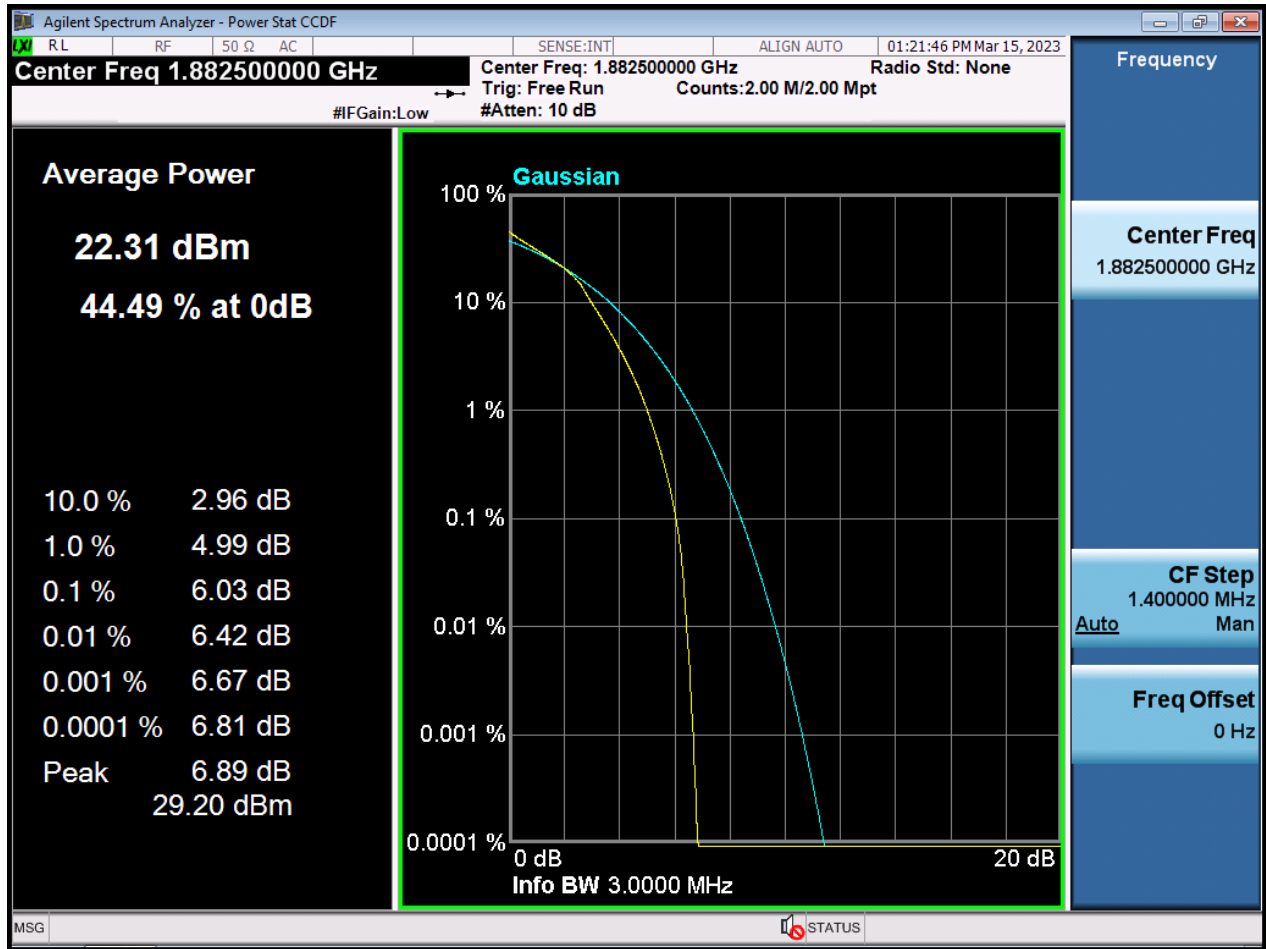


BW3 M_PAR_Middle Channel_64QAM_FullRB

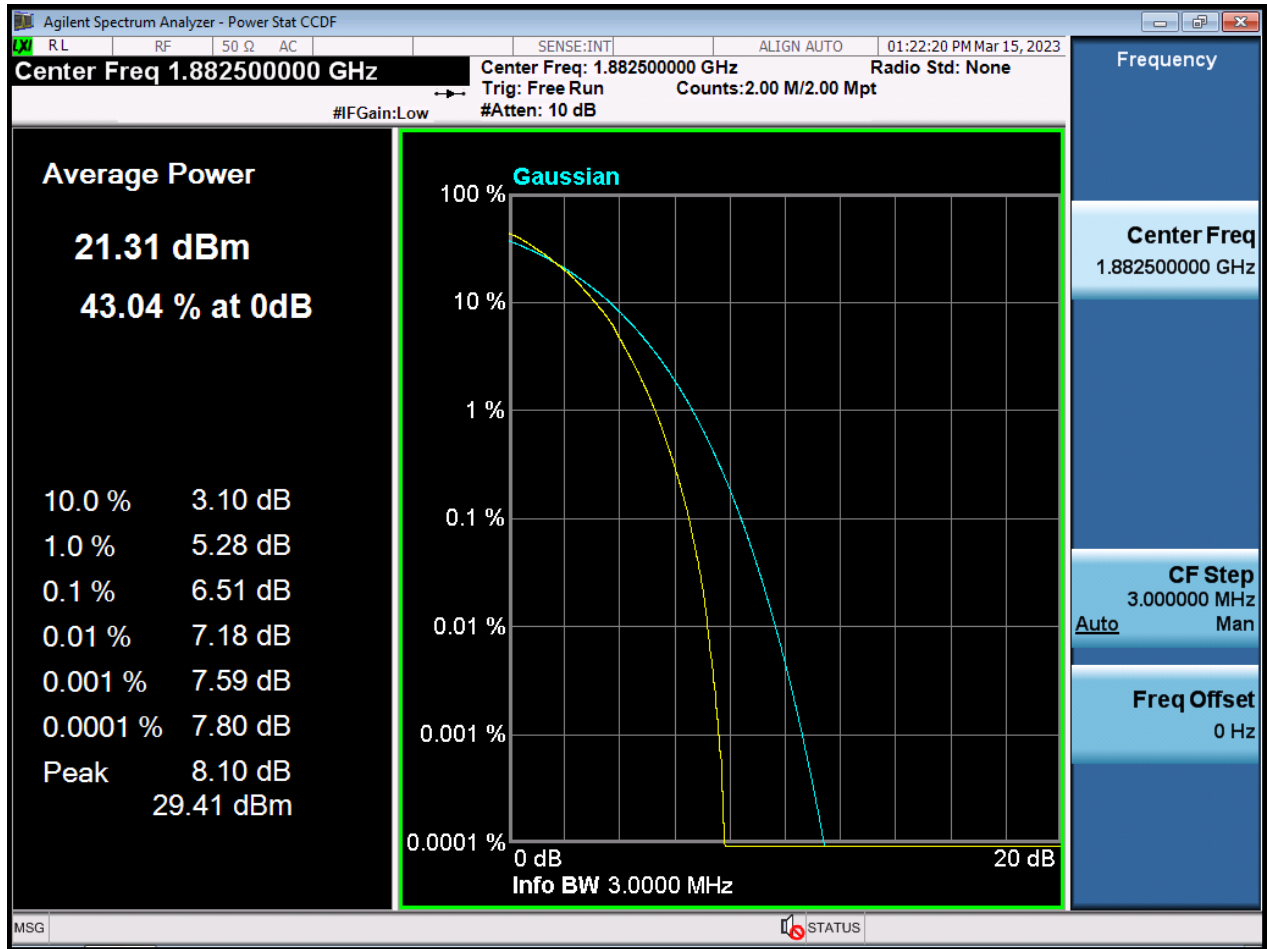


BW3 M_PAR_Middle Channel_256QAM_FullRB

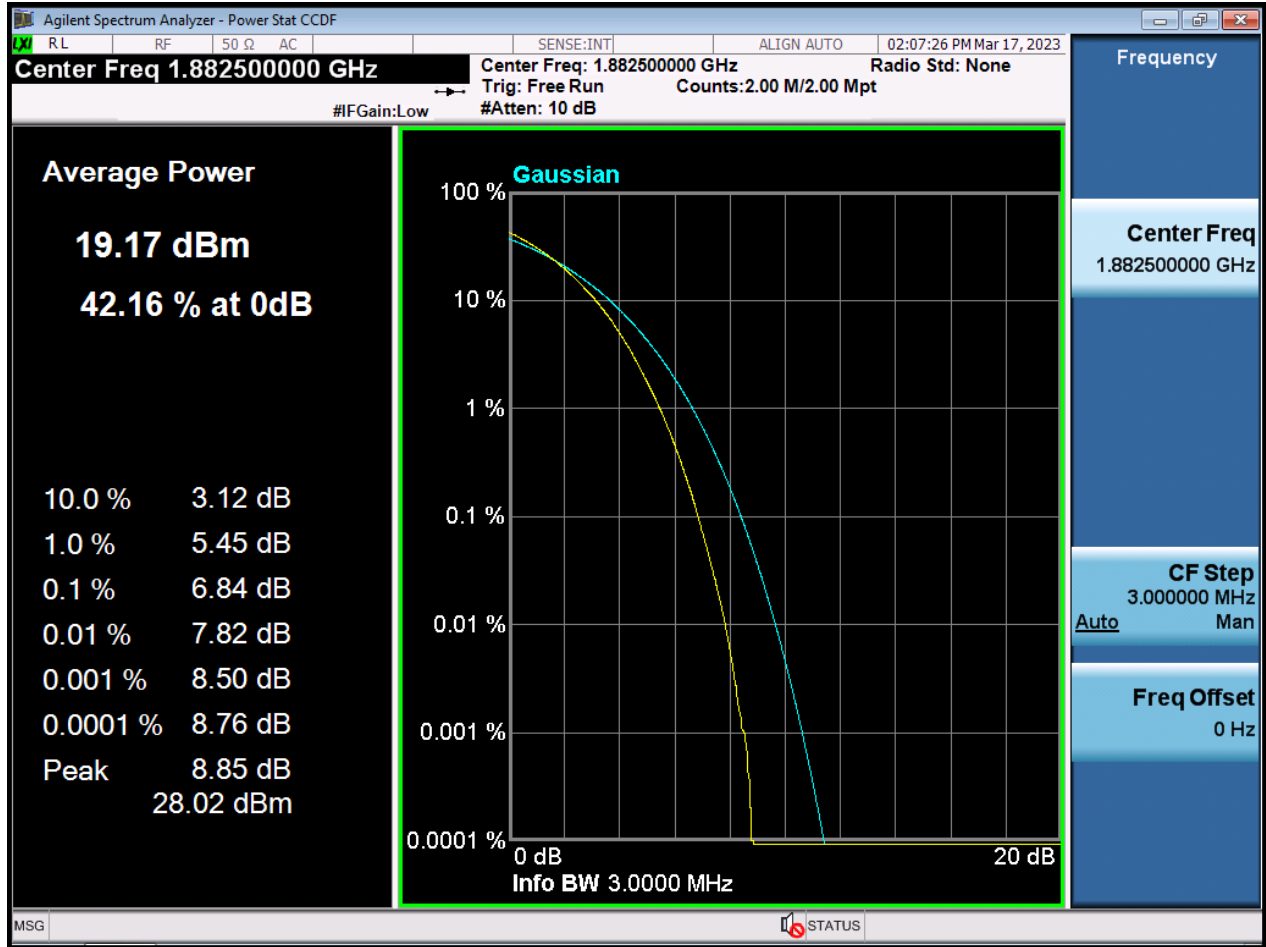


BW5 M_PAR_Middle Channel_QPSK_FullIRB

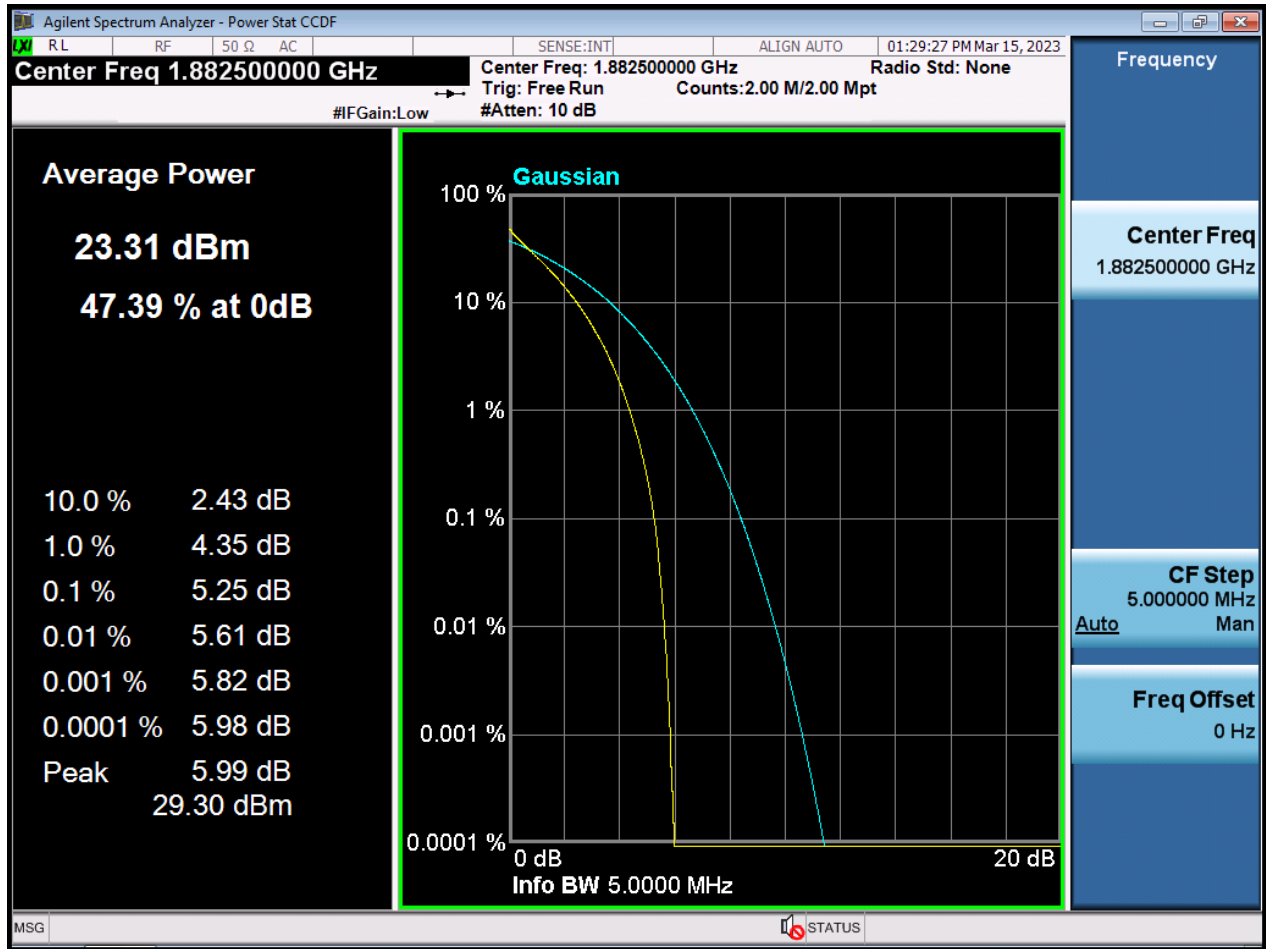


BW5 M_PAR_Middle Channel_16QAM_FullRB

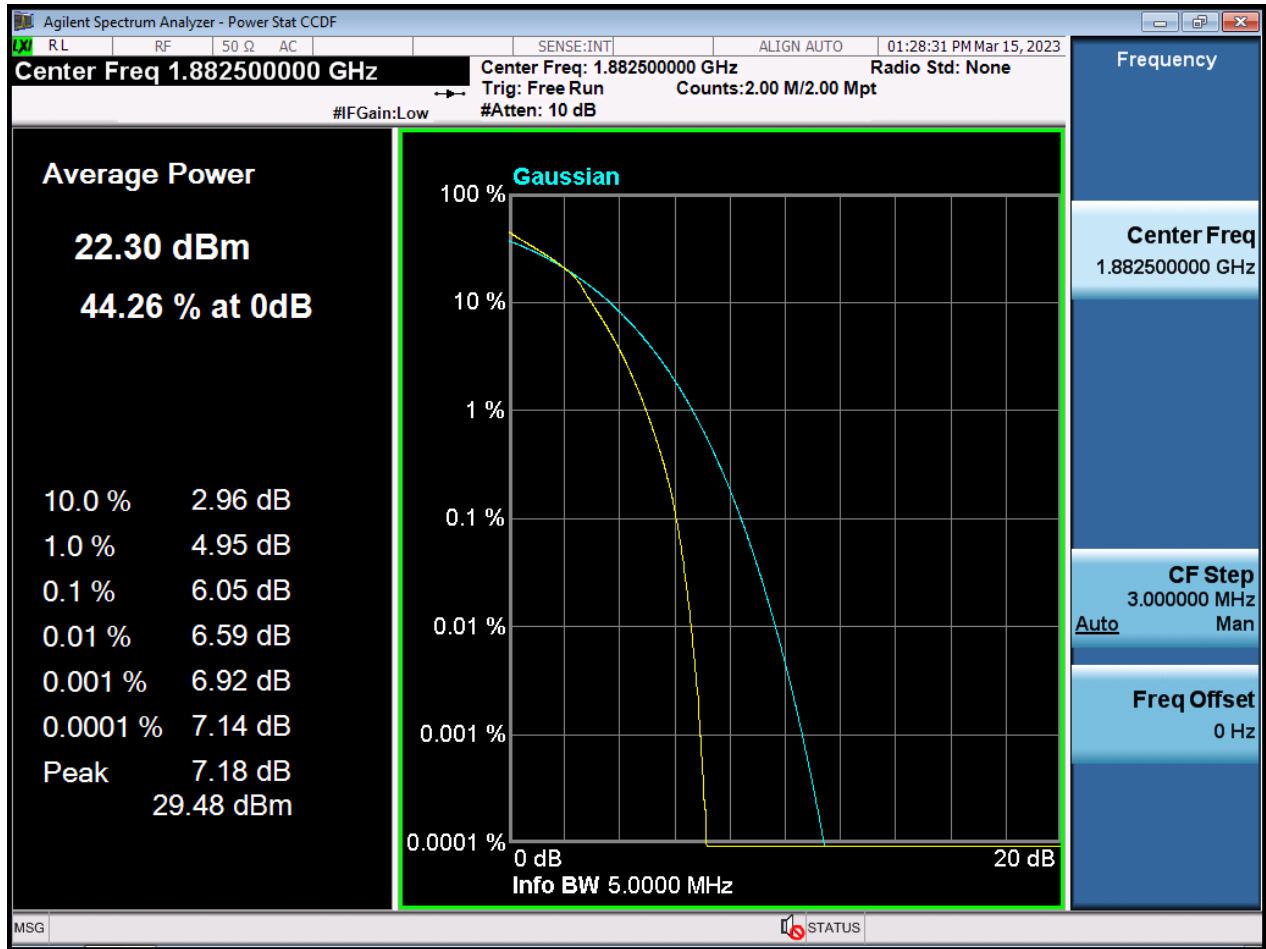


BW5 M_PAR_Middle Channel_64QAM_FullRB

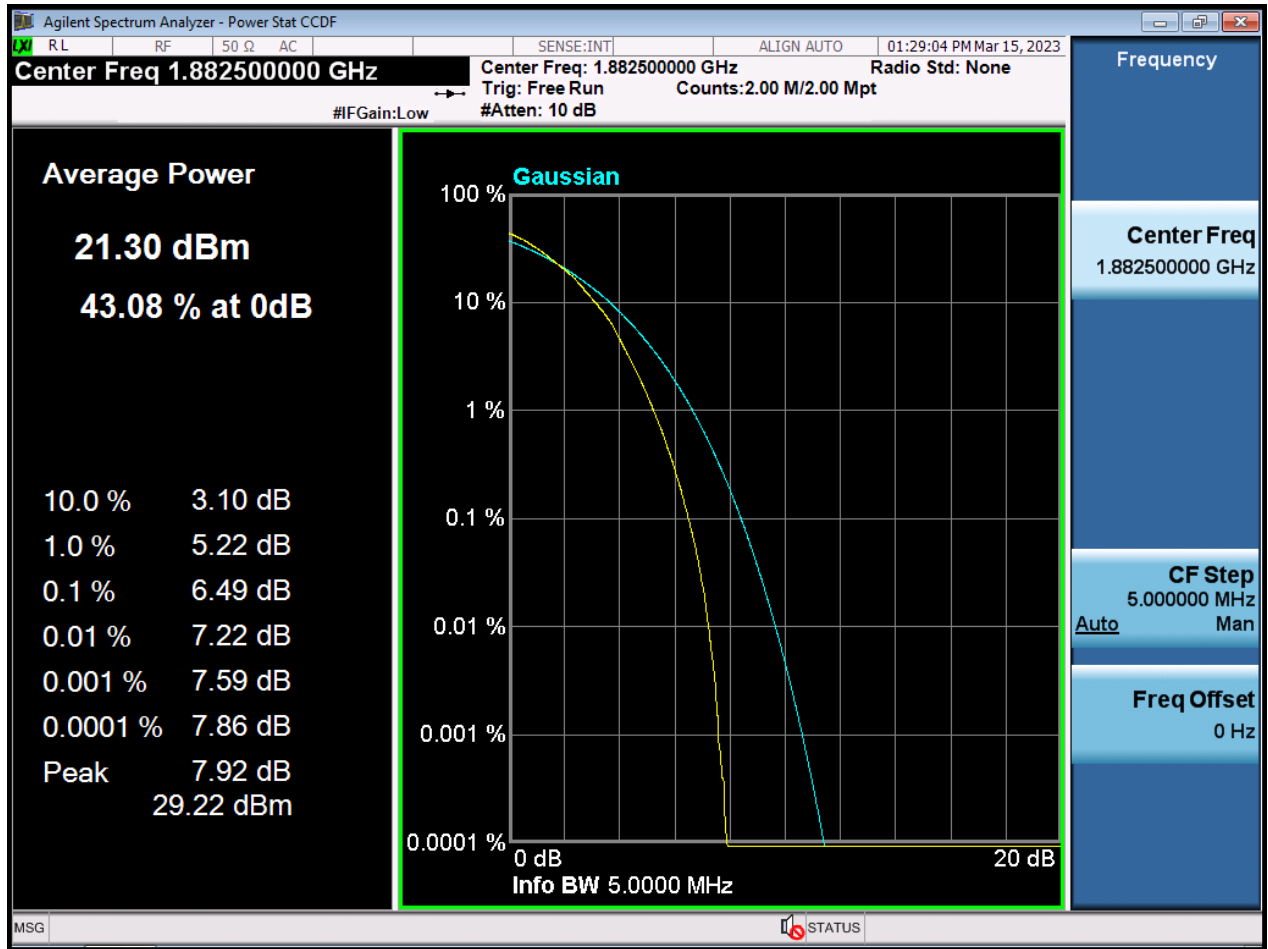


BW5 M_PAR_Middle Channel_256QAM_FullRB

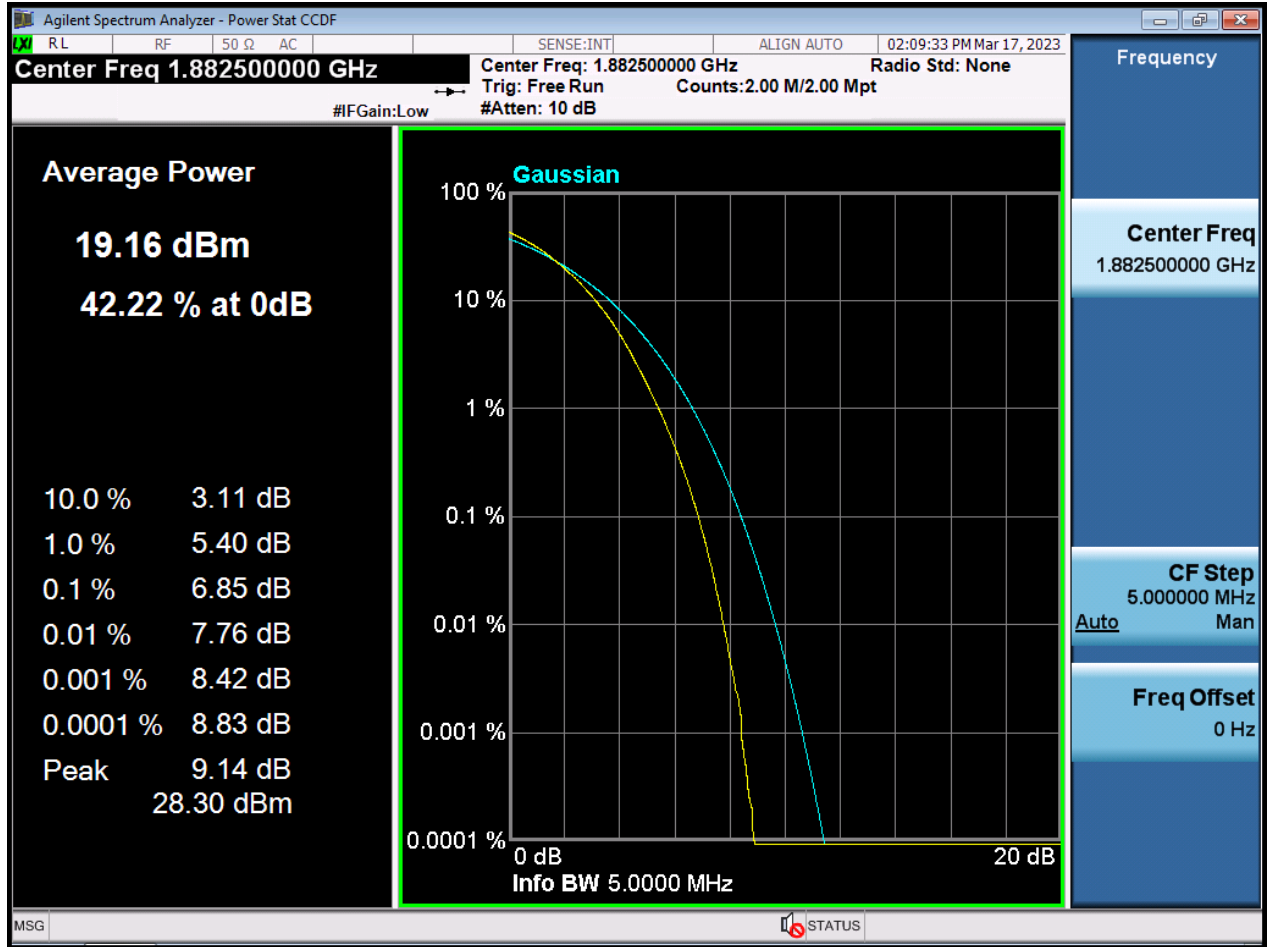


BW10 M_PAR_Middle Channelz_QPSK_FullRB

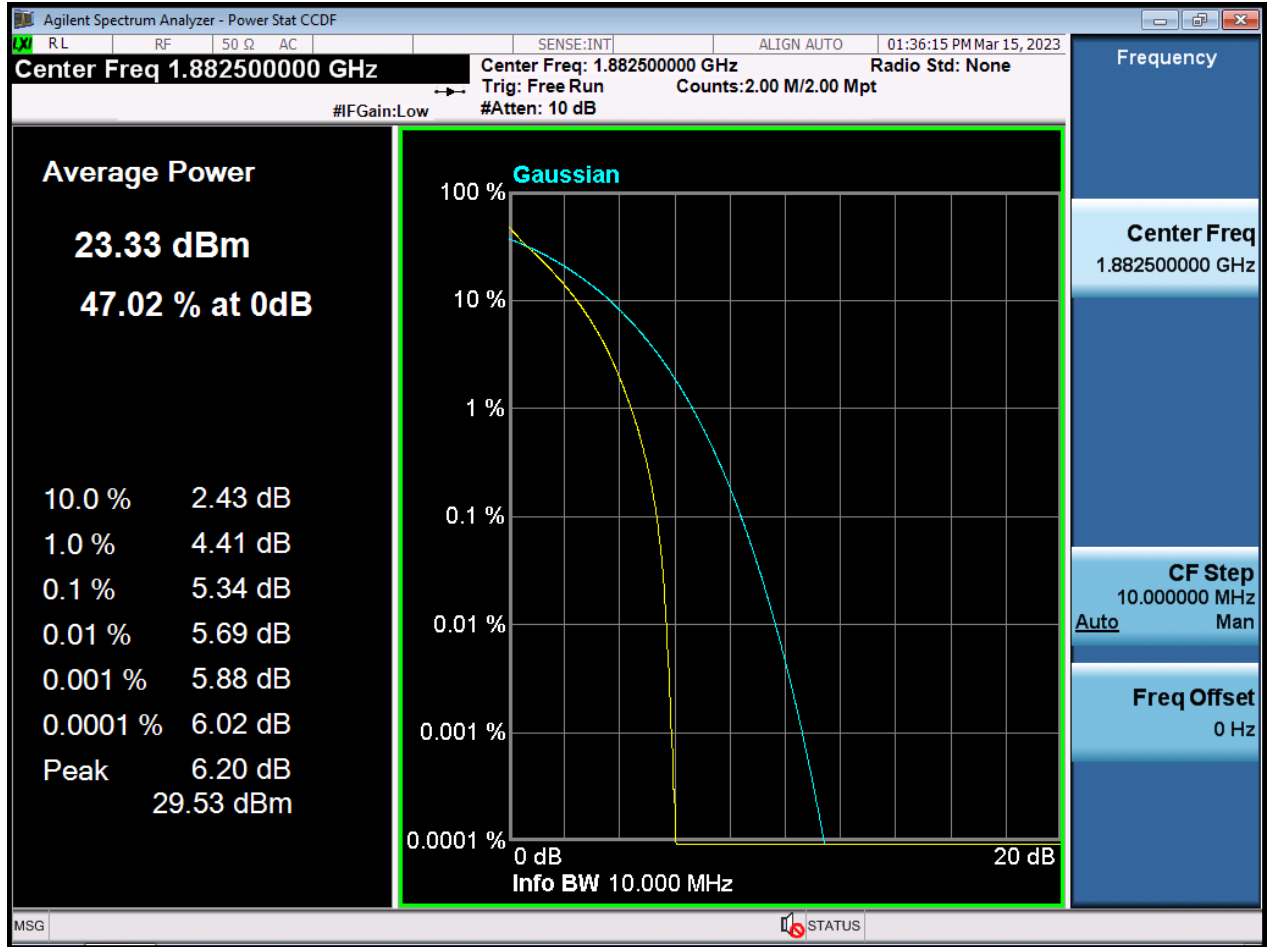


BW10 M_PAR_Middle Channel_16QAM_FullRB

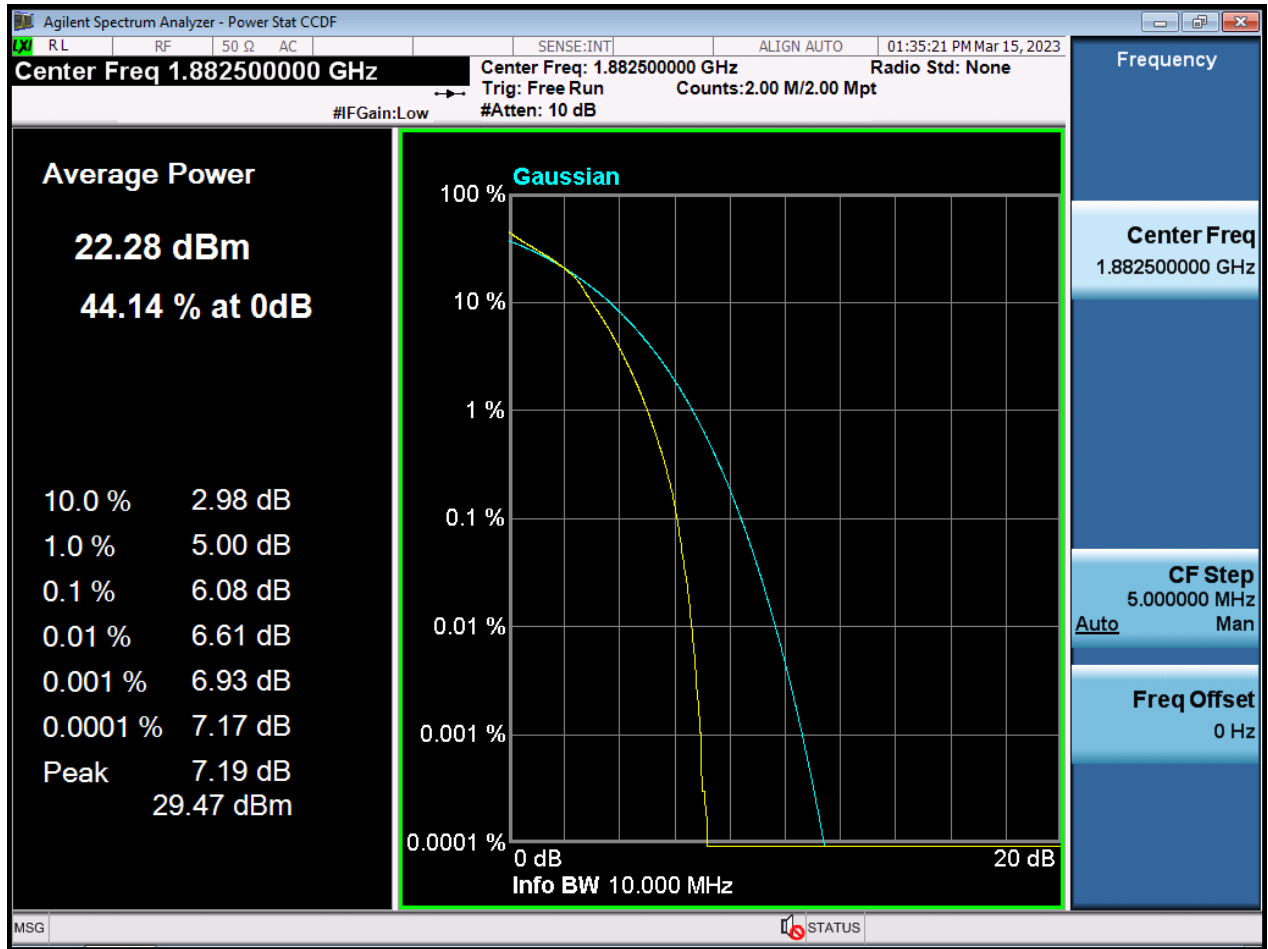


BW10 M_PAR_Middle Channel_64QAM_FullRB

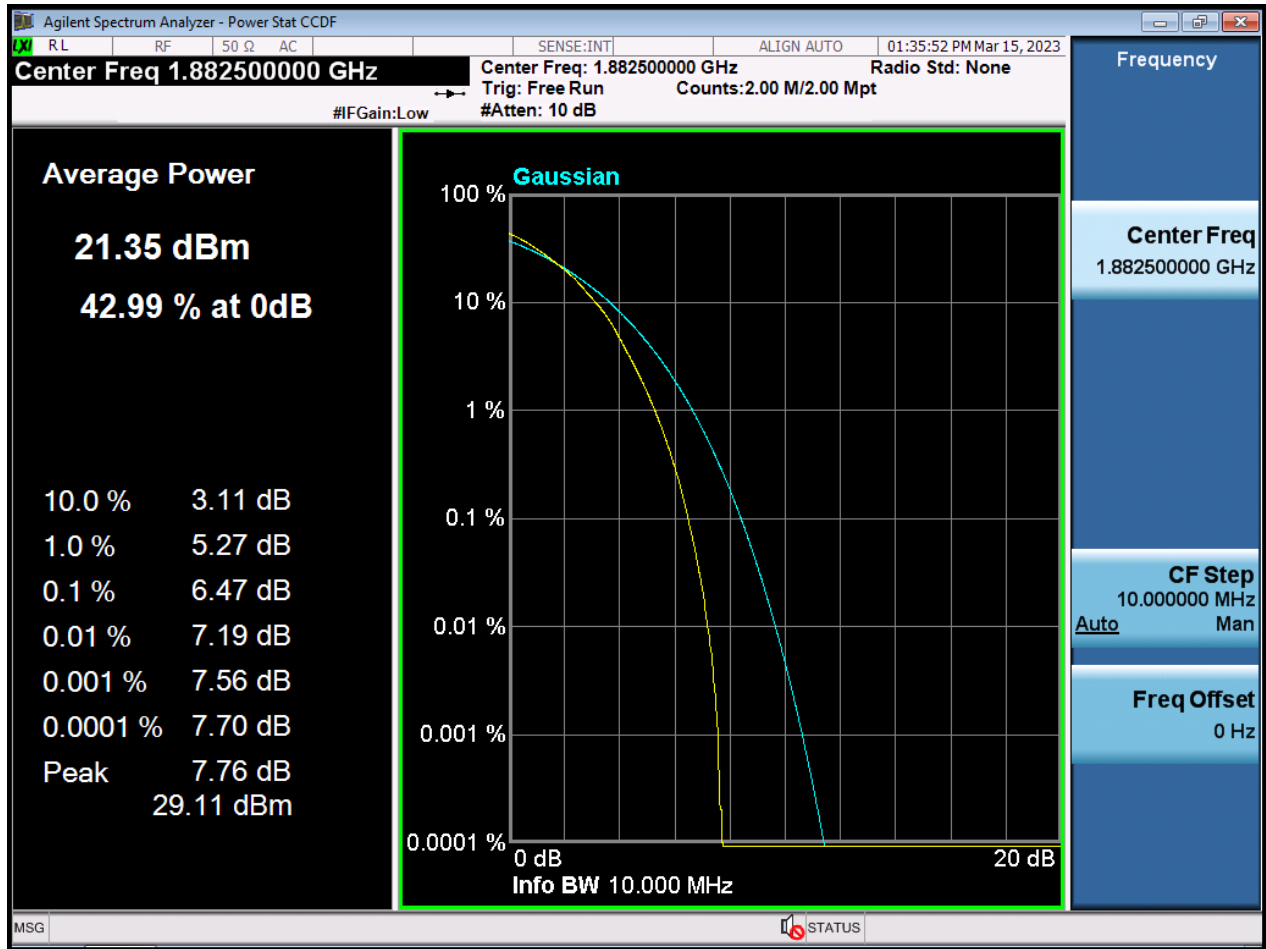


BW10 M_PAR_Middle Channel_256QAM_FullIRB

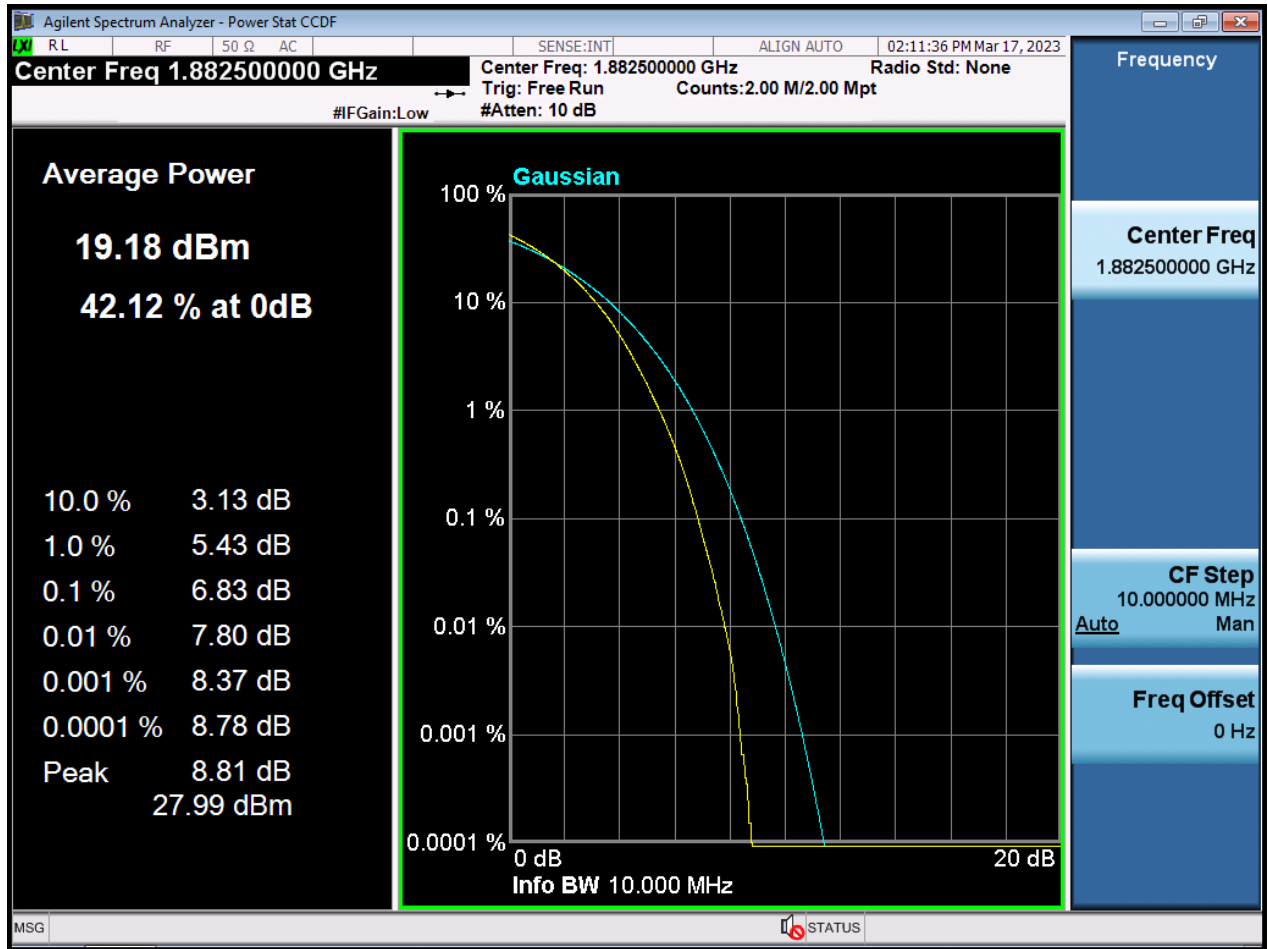


BW15 M_PAR_Middle Channel_QPSK_FullRB

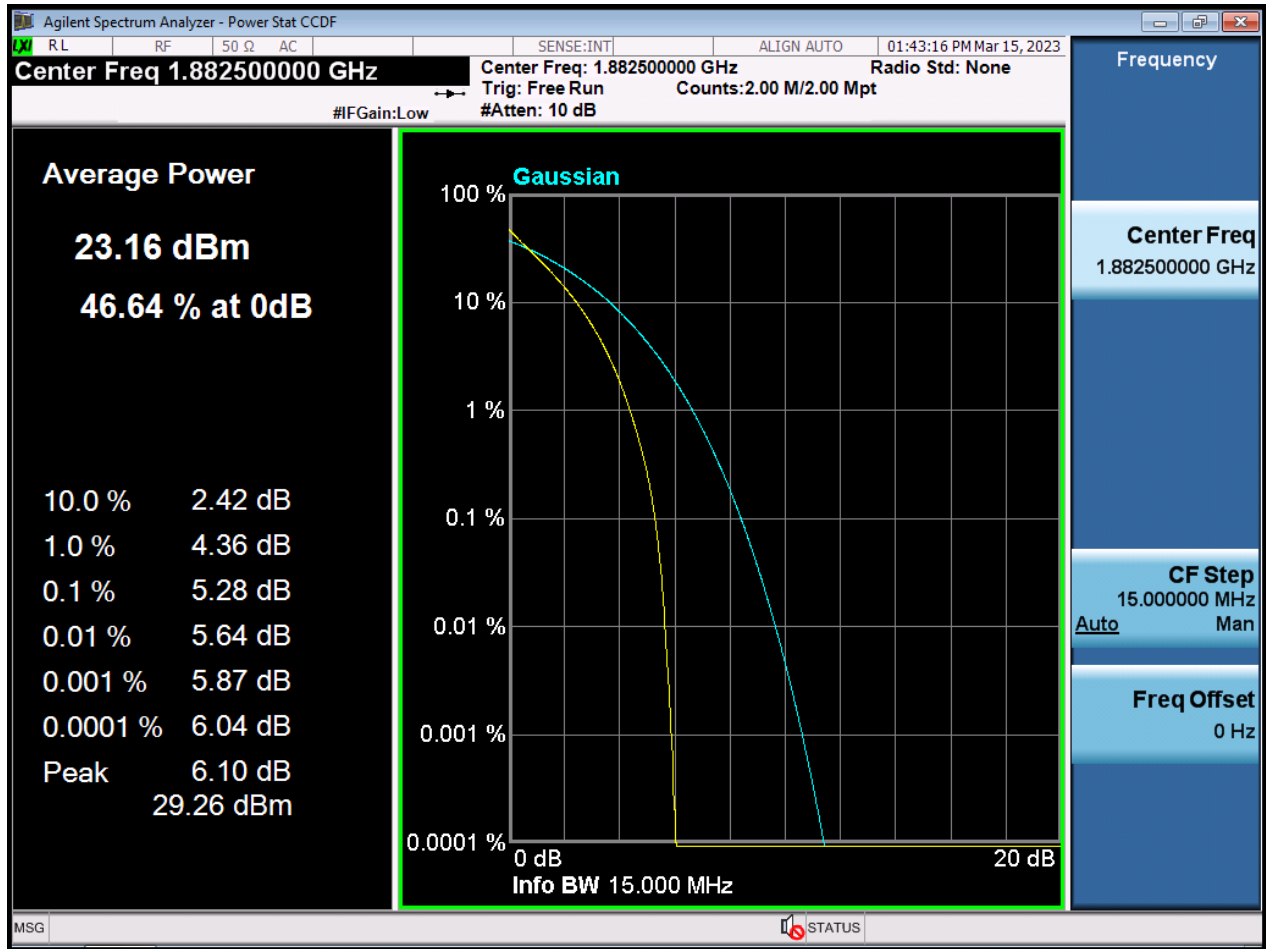


BW15 M_PAR_Middle Channel_16QAM_FullRB

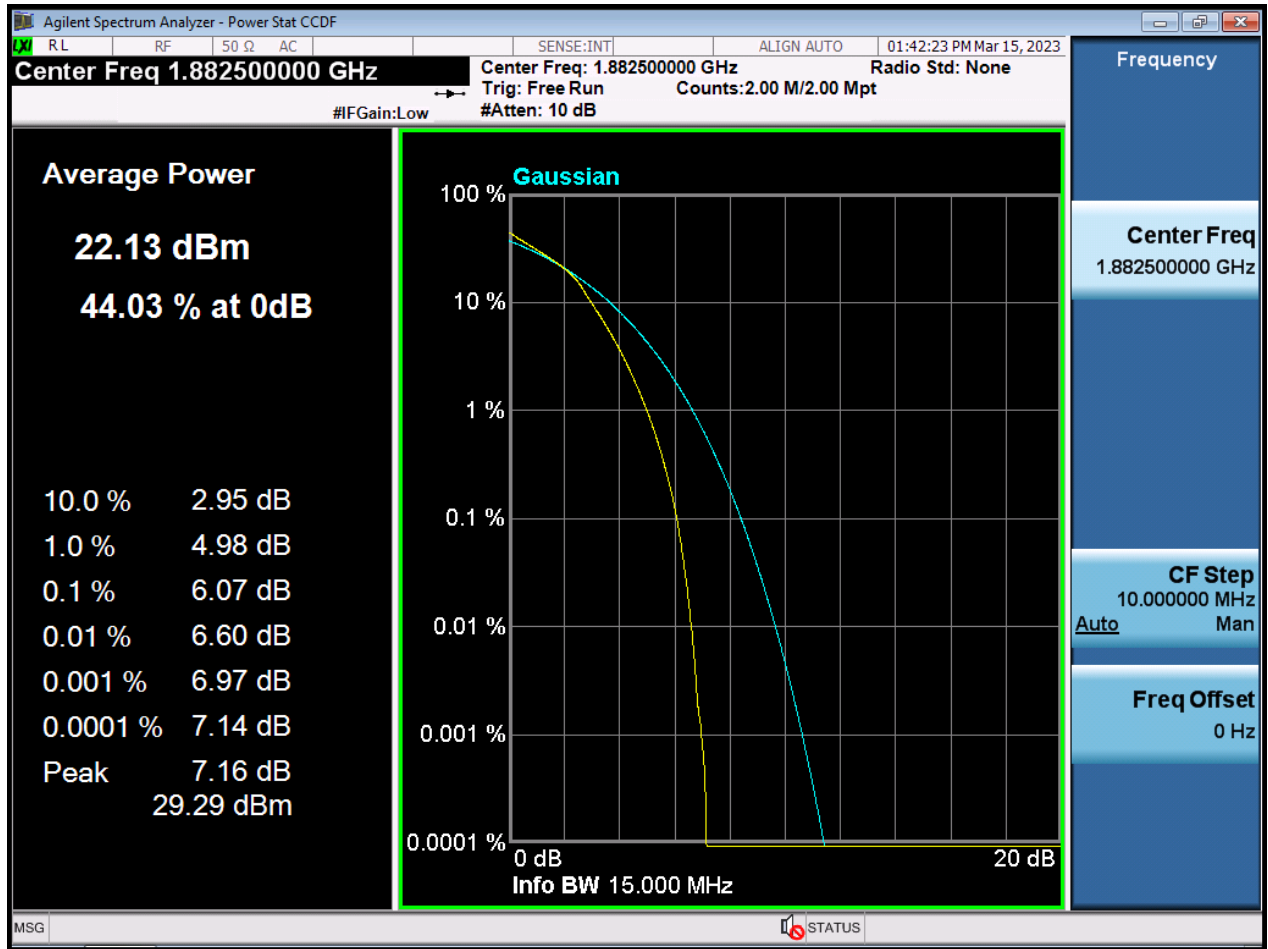


BW15 M_PAR_Middle Channel_64QAM_FullRB

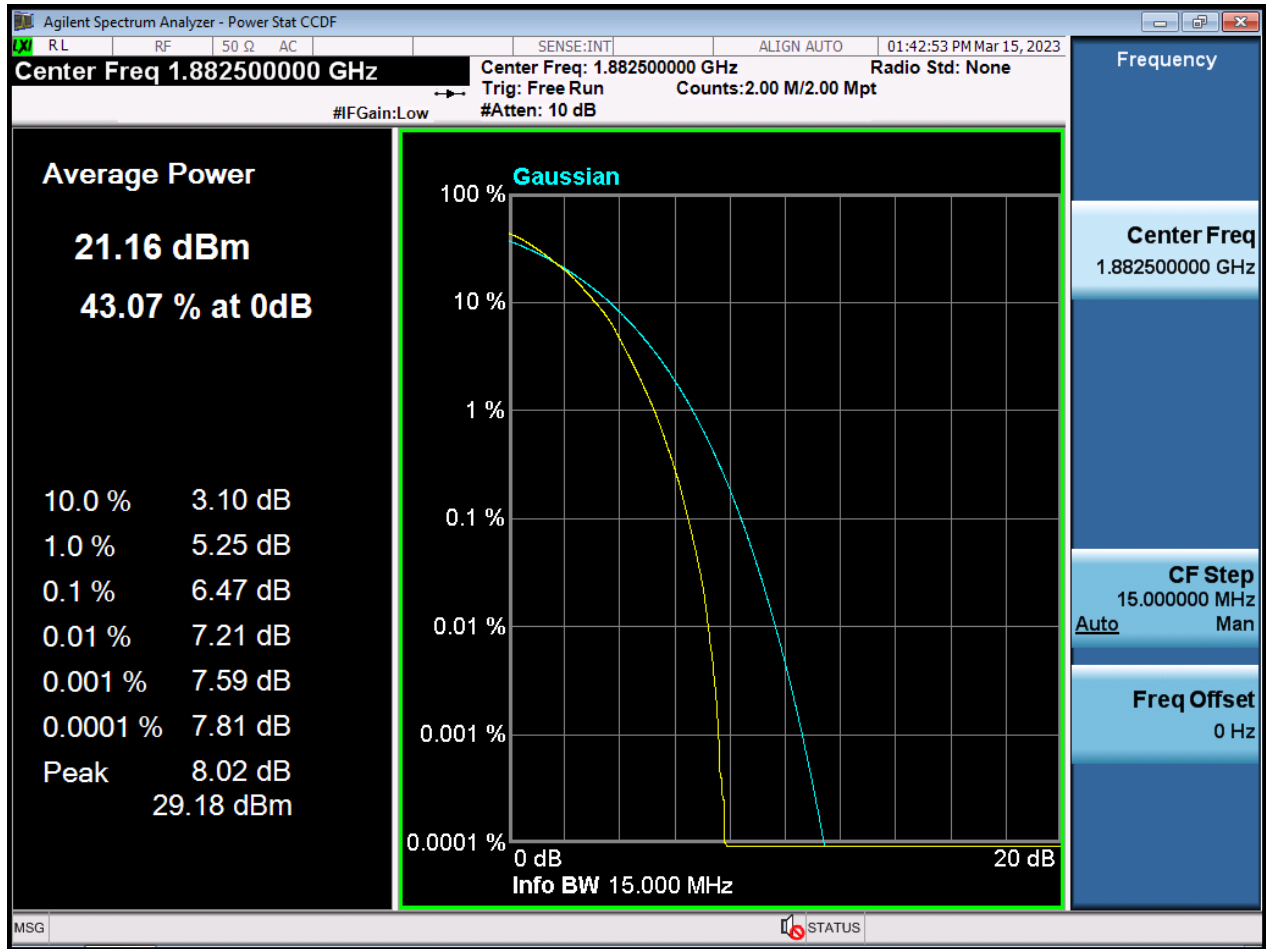


BW15 M_PAR_Middle Channel_256QAM_FullIRB

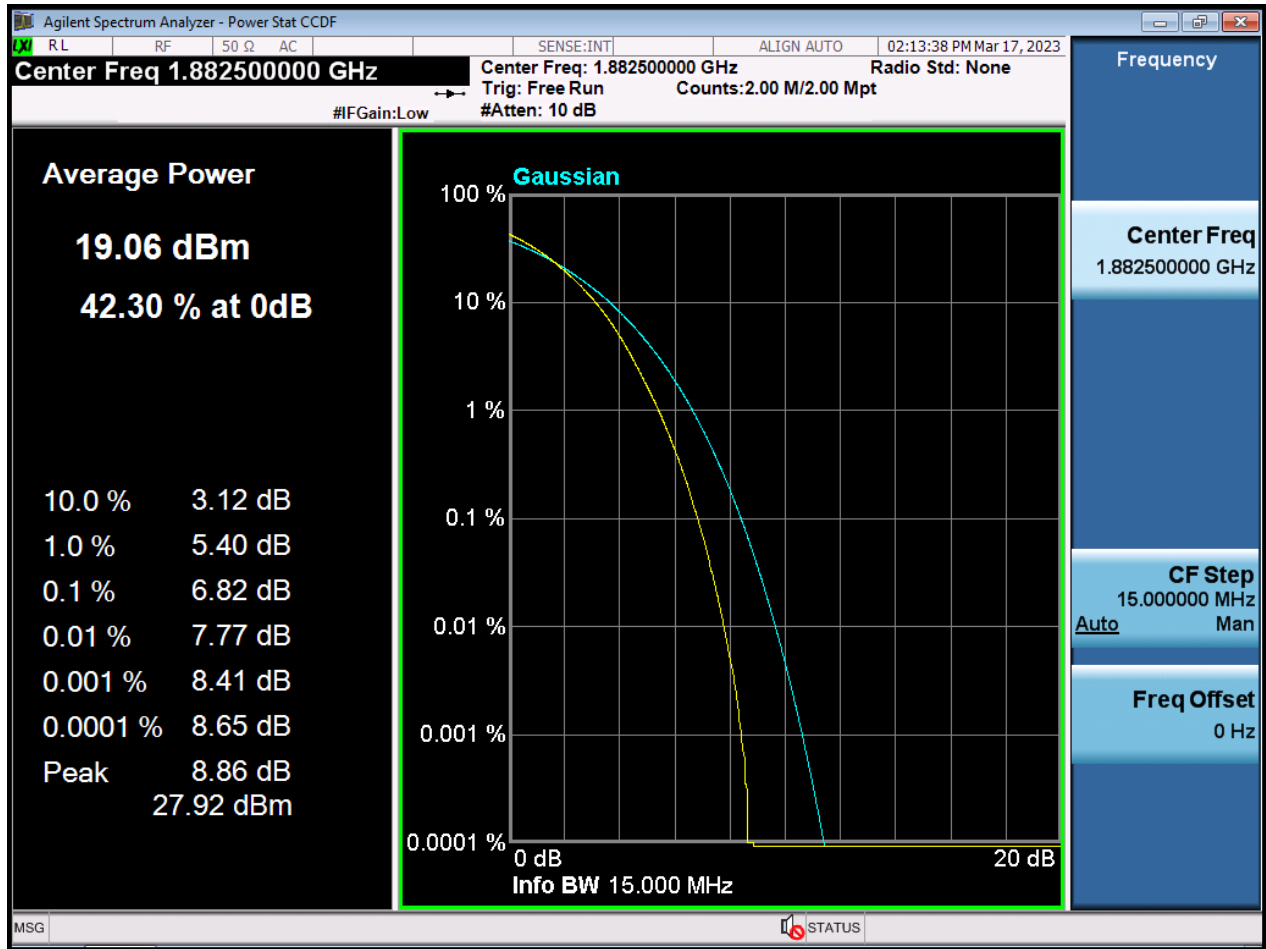


BW20 M_PAR_Middle Channel_QPSK_FullRB

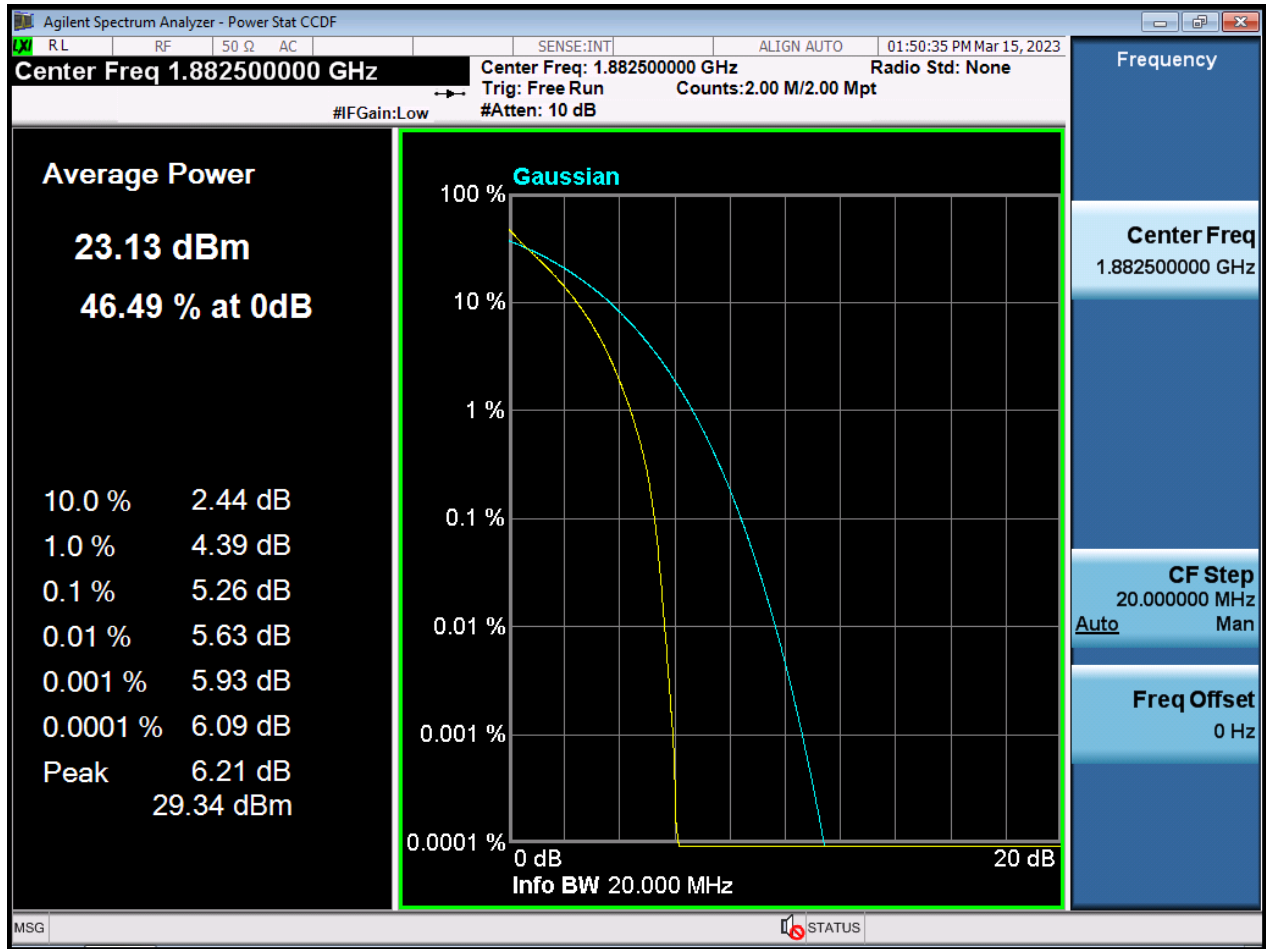


BW20 M_PAR_Middle Channel_16QAM_FullRB

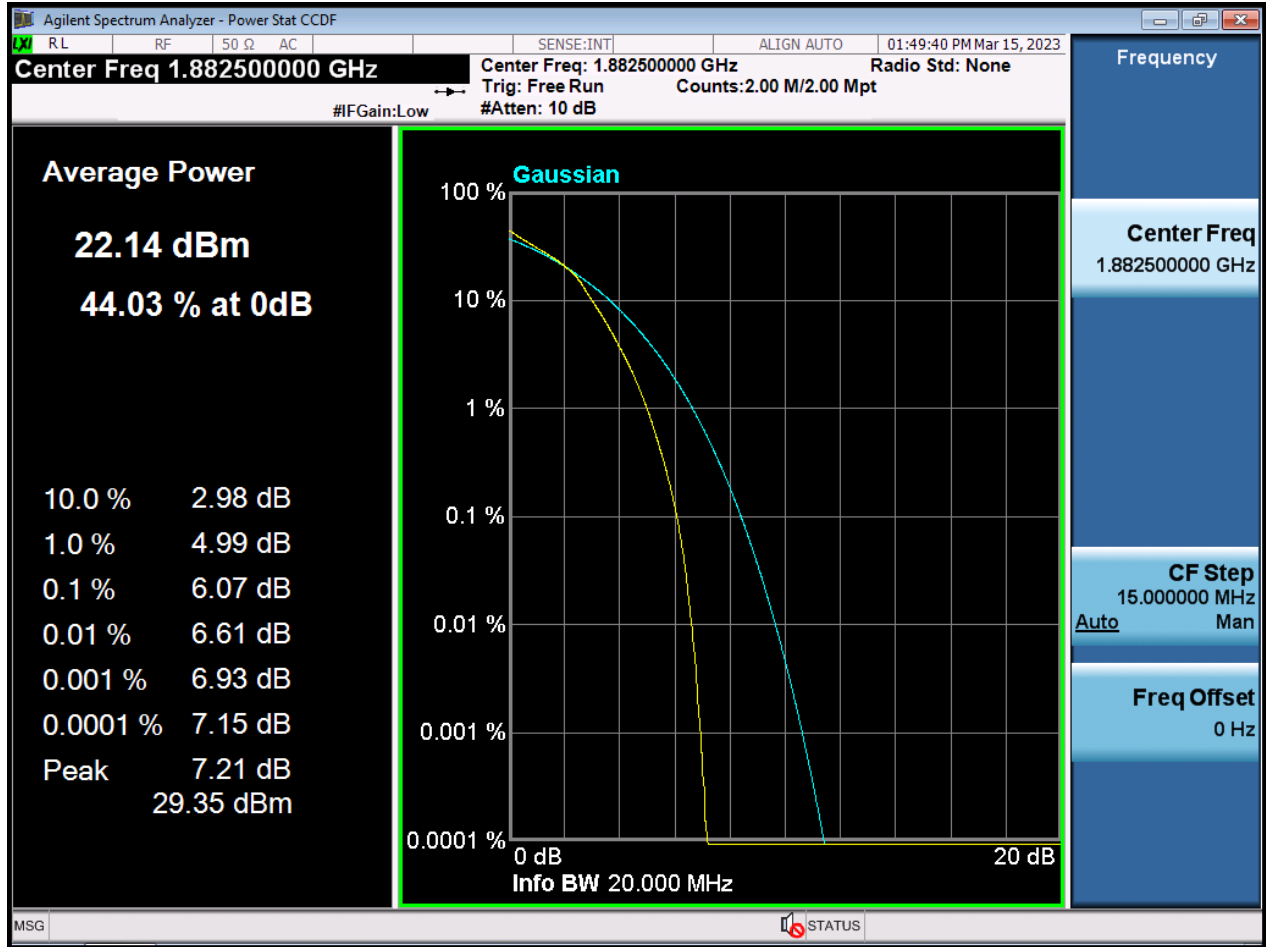


BW20 M_PAR_Middle Channel_64QAM_FullRB

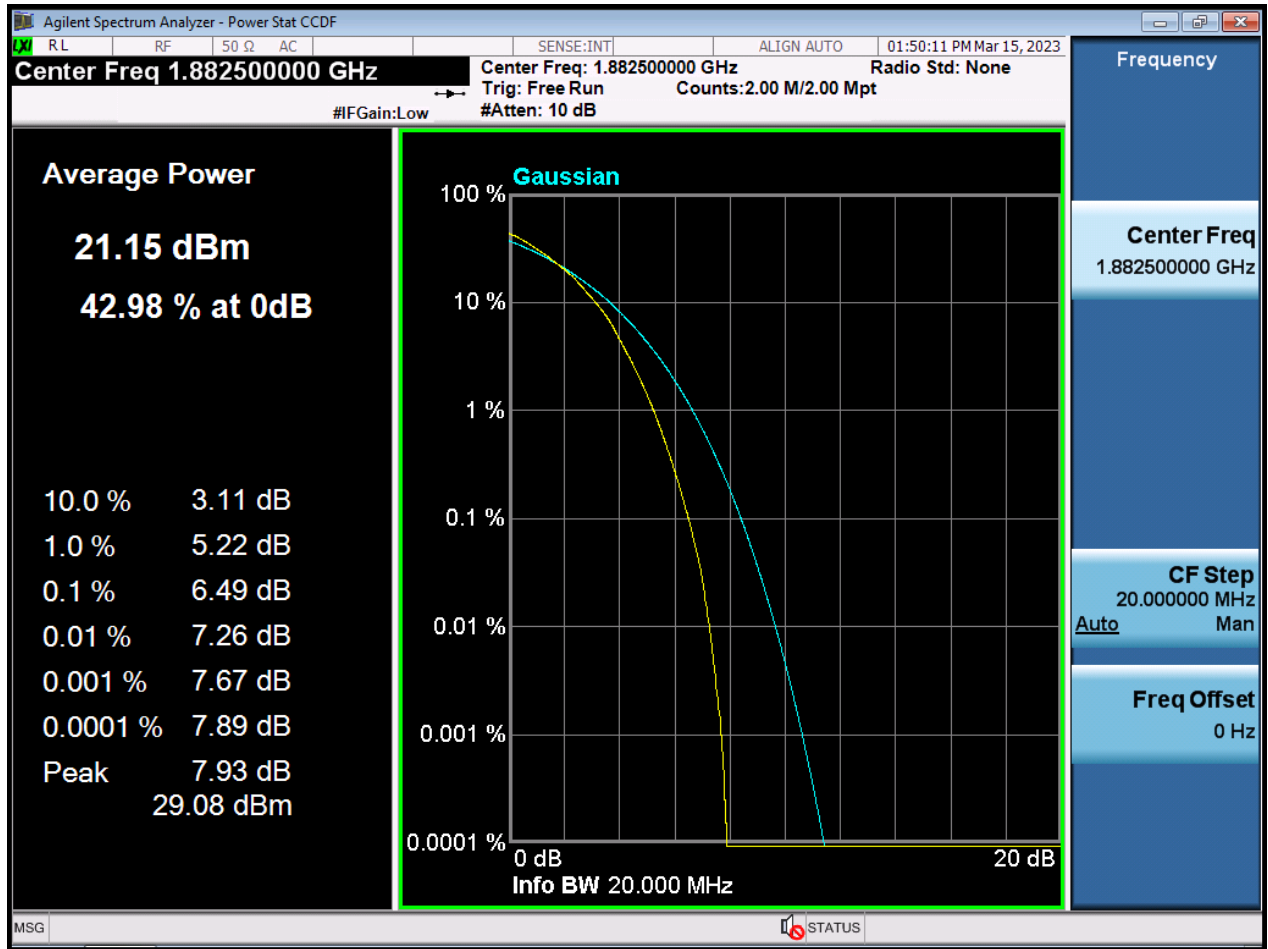


BW20 M_PAR_Middle Channel_256QAM_FullIRB

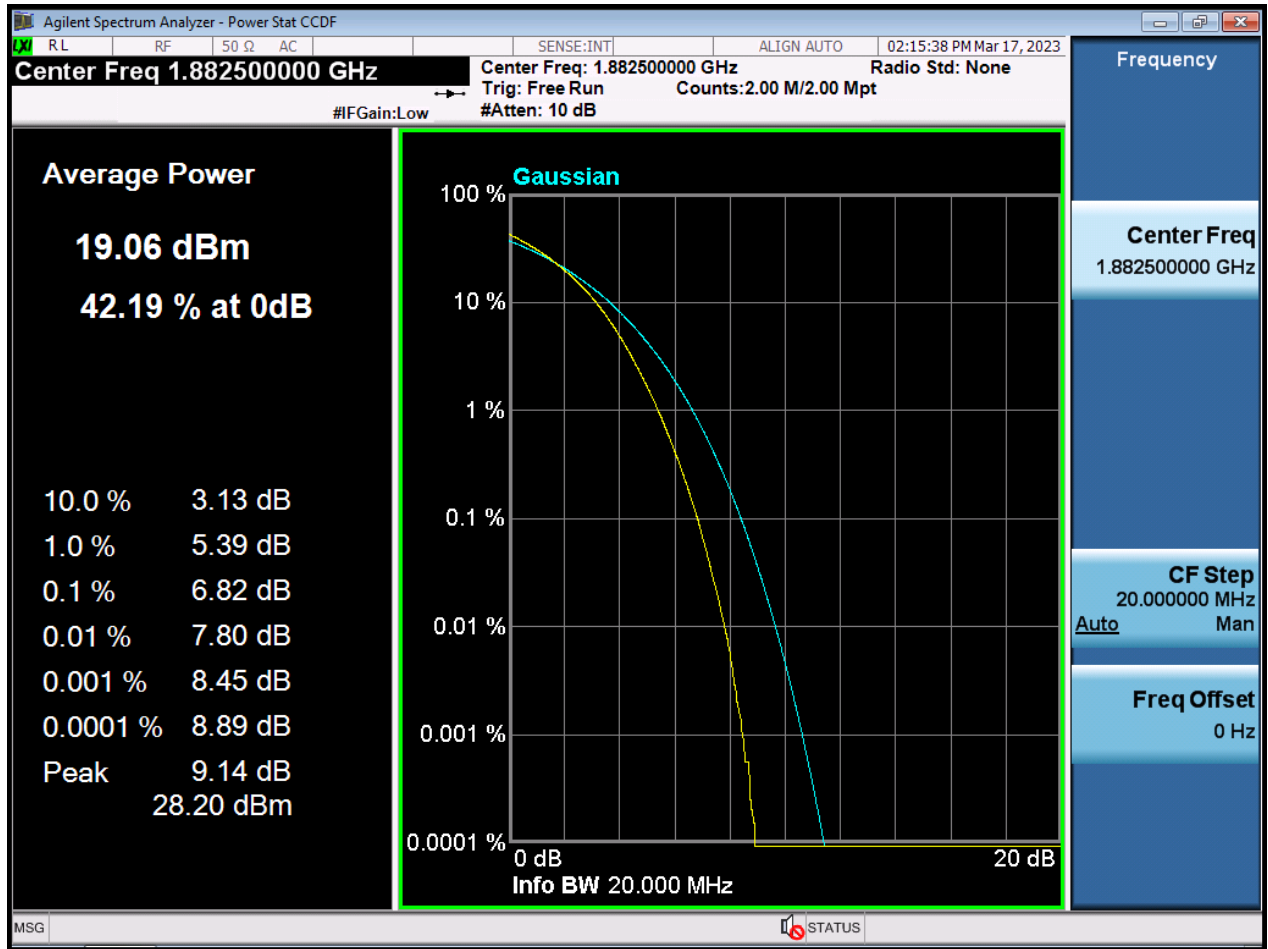


BW1.4 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

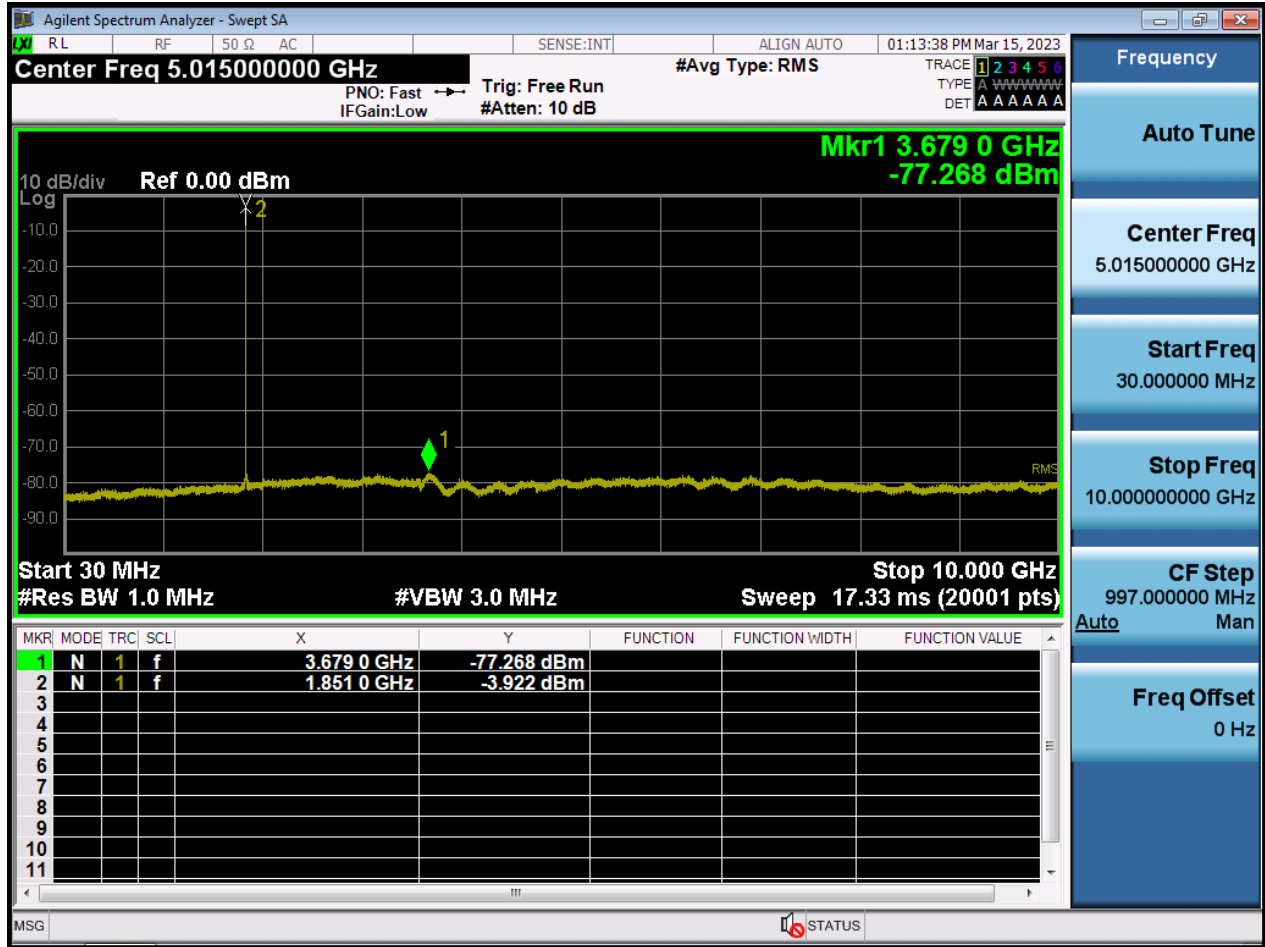


BW1.4 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

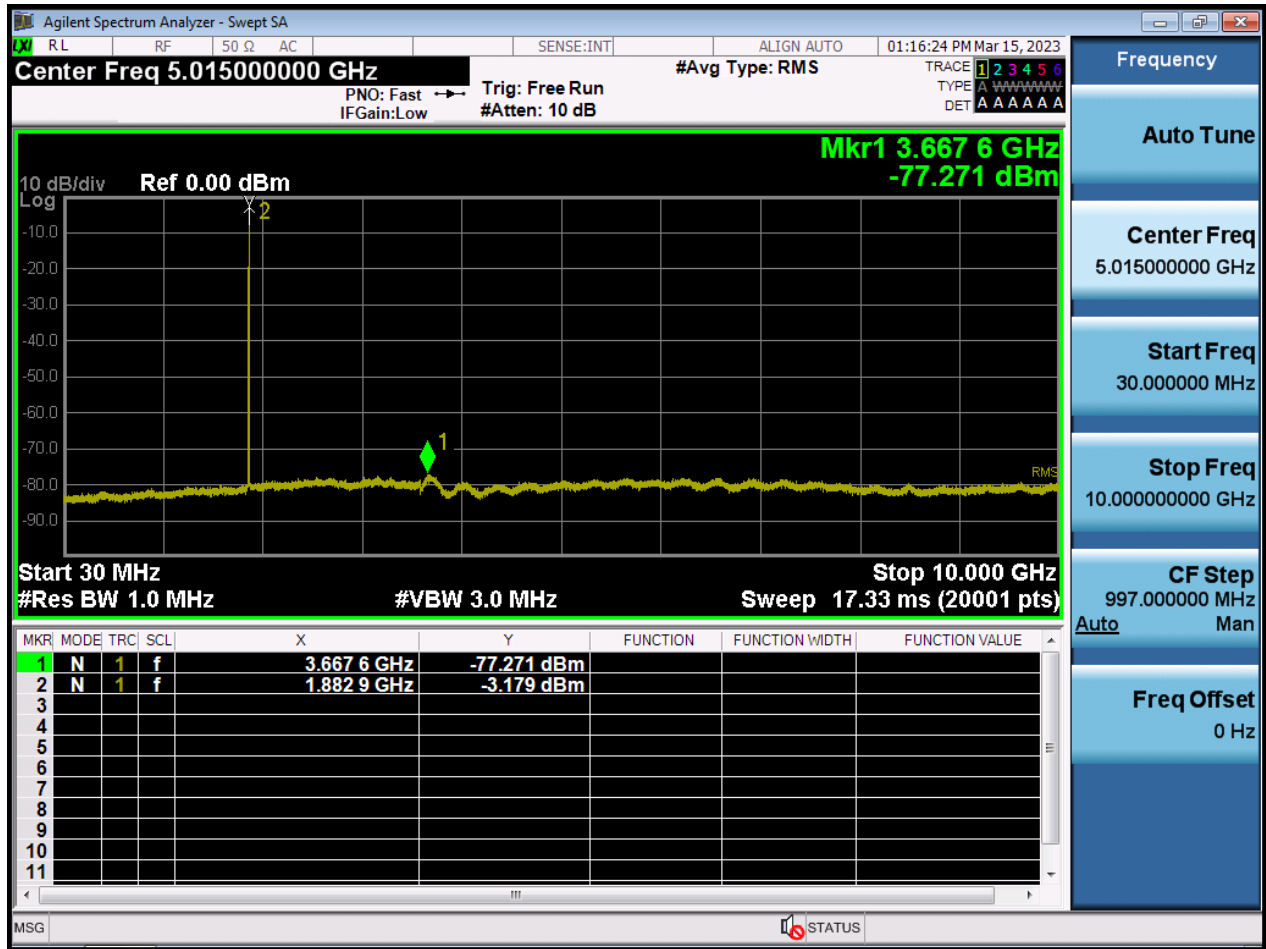


BW1.4 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

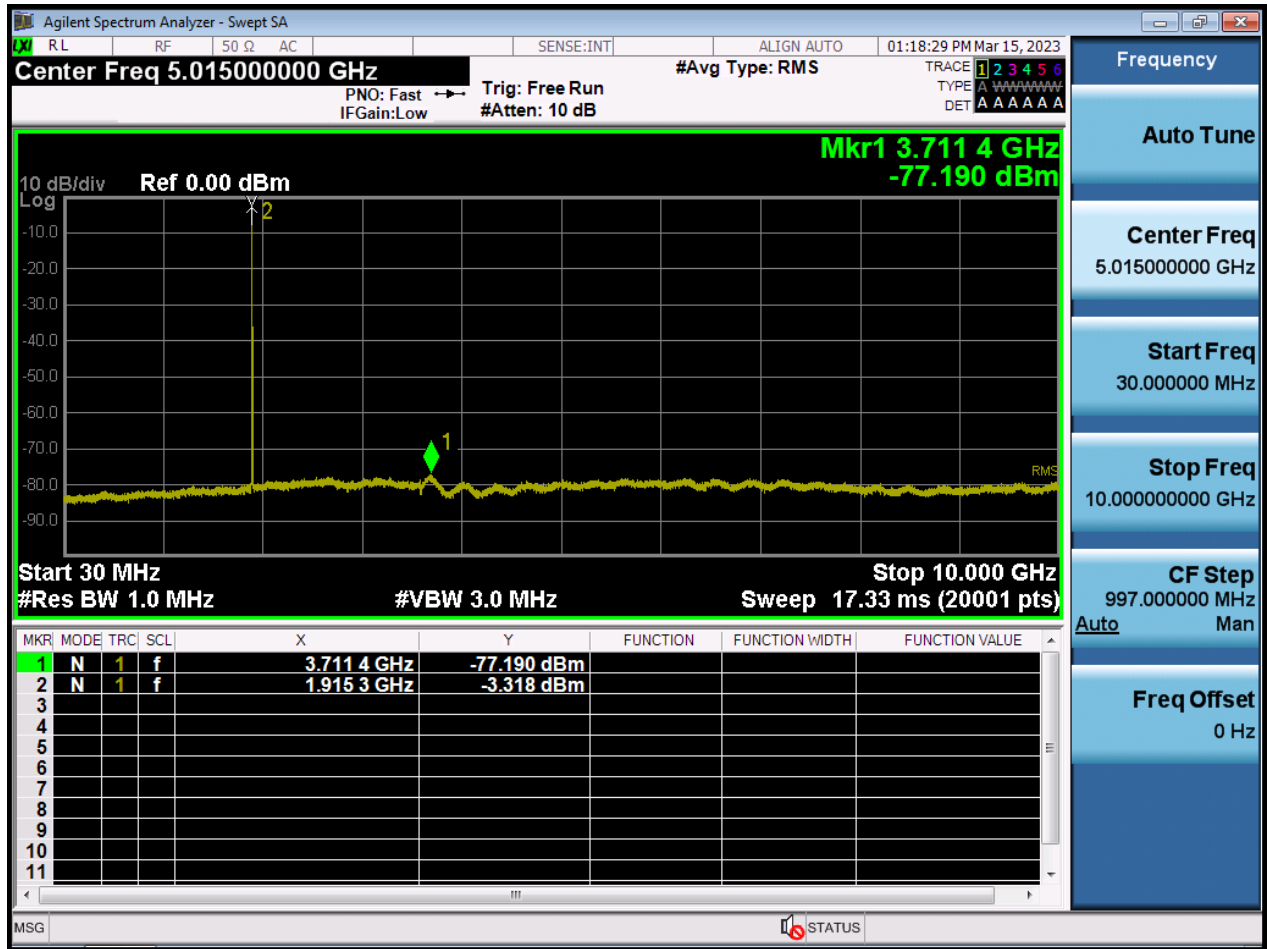


BW3 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

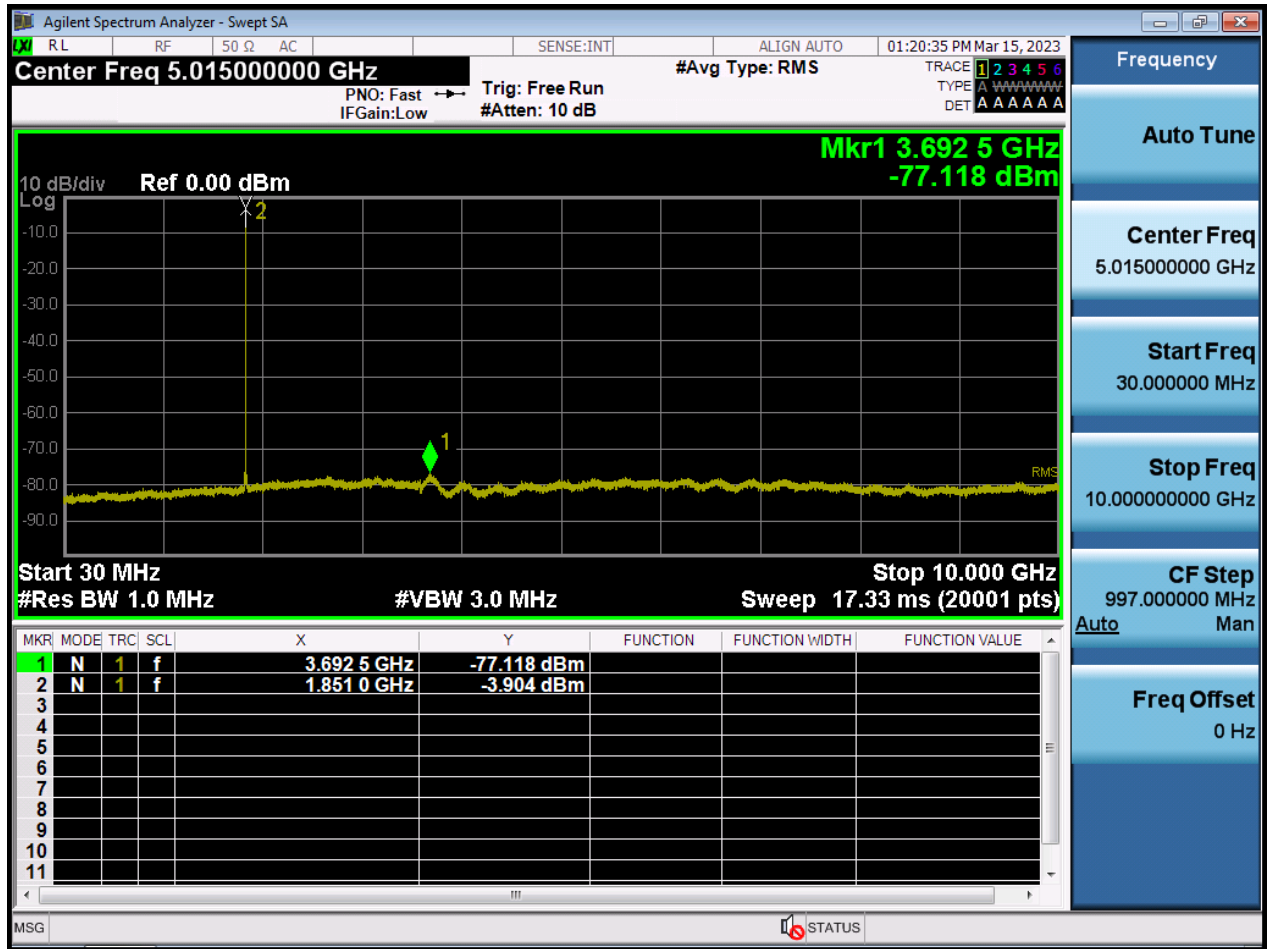

BW3 M_CSE(30 M-10 G)_Middle Channel_QPSK_1RB

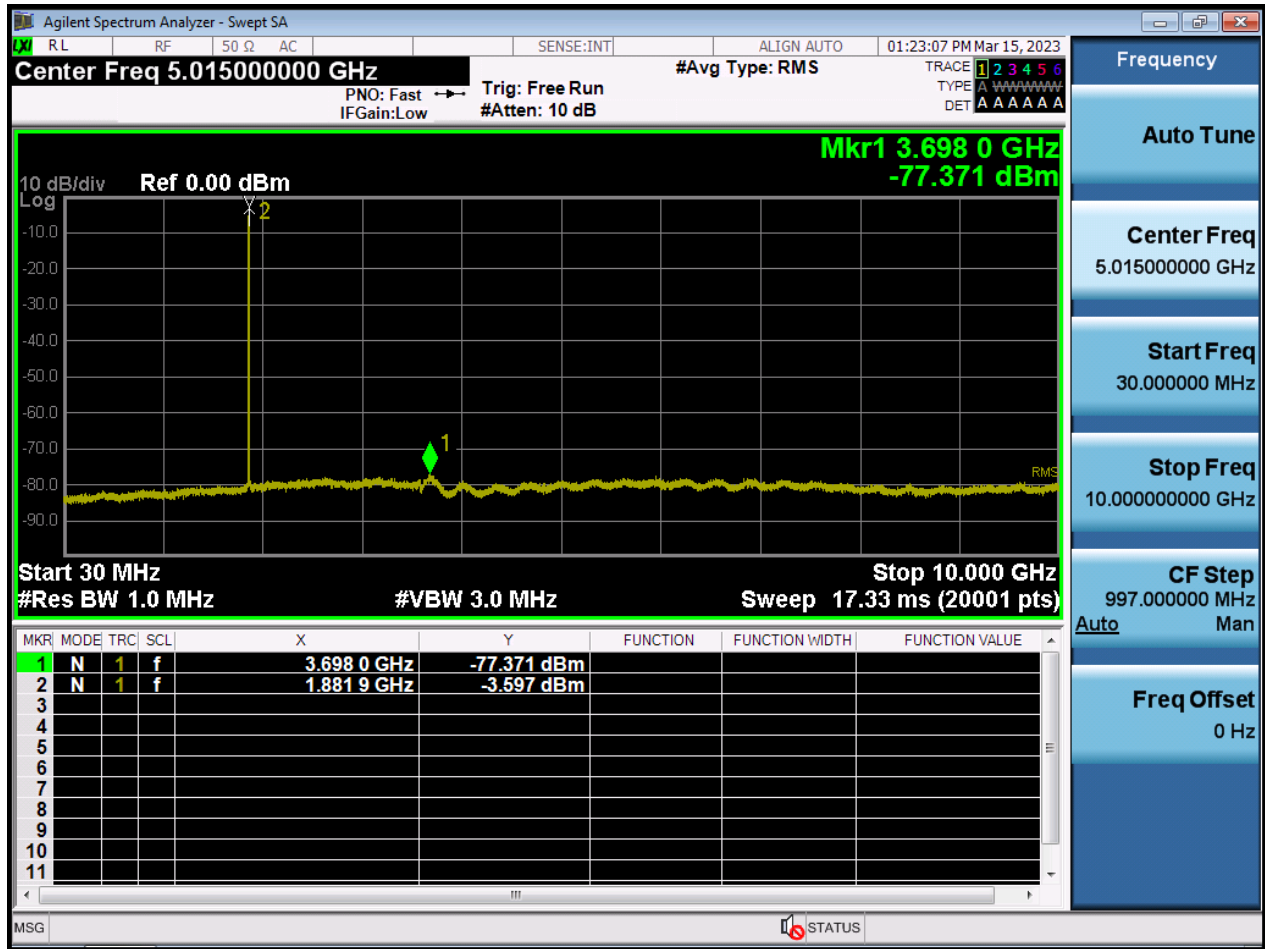

BW3 M_CSE(30 M-10 G)_Highest Channel_QPSK_1RB

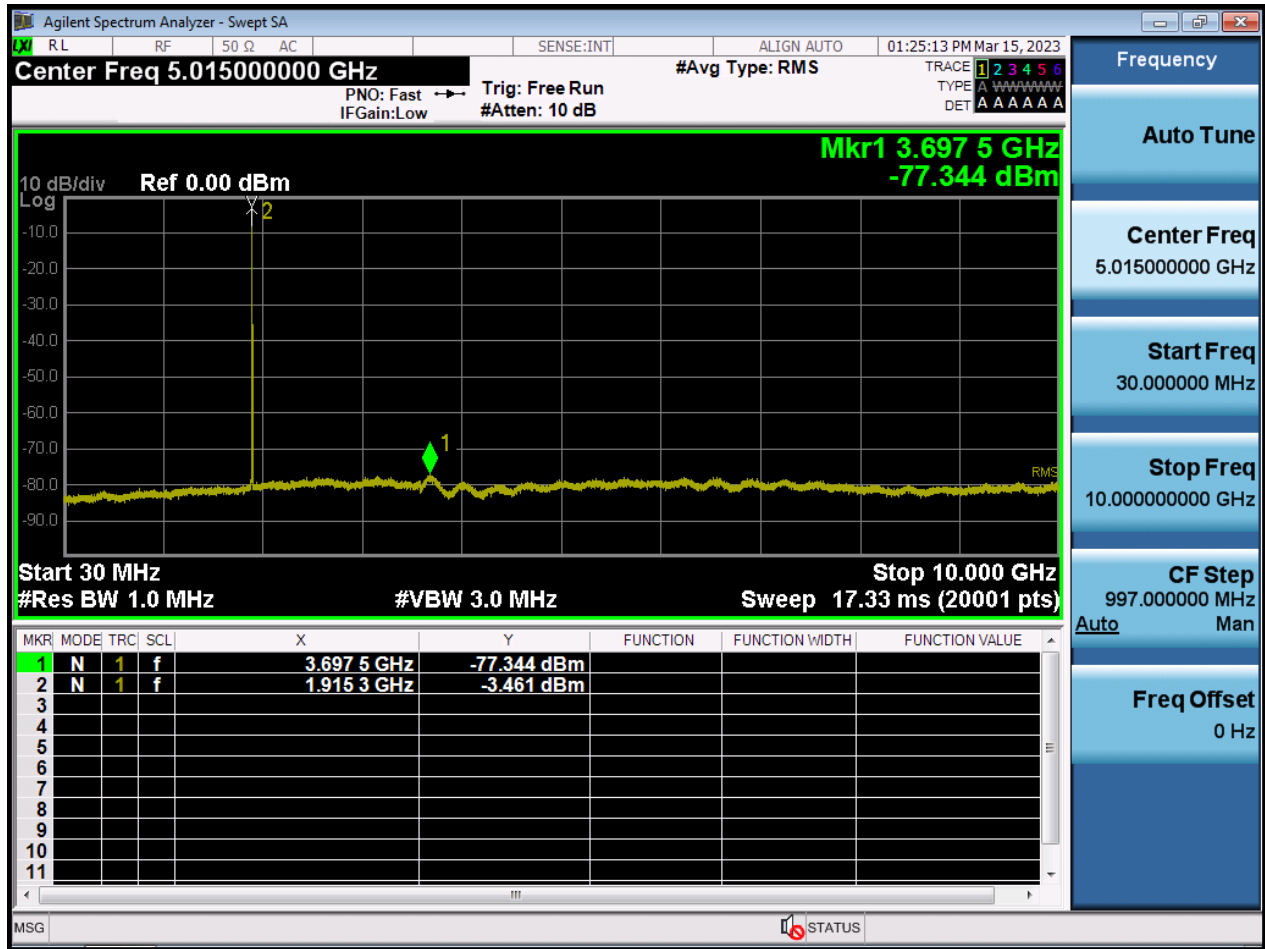

BW5 M_CSE(30 M-10 G)_Lowest Channel_QPSK_1RB

