



SAMSUNG ELECTRONICS Co., Ltd.,  
Regulatory Compliance Group  
IT R&D Center  
416 Maetan3-Dong,  
Yeongtong-gu, Suwon city,  
Gyeonggi-Do, Korea 443-742

## FCC CFR47 PART 24 SUBPART CERTIFICATION REPORT

Model Tested : M3510  
FCC ID(Requested) : A3LSWDM3510  
Report No : FF-119-R1  
Job No : FF-119  
Date issued : July 10, 2008

- Abstract -

All measurement reported herein accordance with FCC Rules, 47CFR Part2,  
Part24.

Prepared By

---

JH WOO - Test Engineer

Authorized By

---

WW JANG - Technical  
Manager



# TABLE OF CONTENT

<b>MEASUREMENT REPORT</b>	<b>Page</b>
<b>1. FCC CERTIFICATION INFORMATION .....</b>	<b>3</b>
1.1. §2.1033 General Information .....	3
<b>2. INTRODUCTION .....</b>	<b>4</b>
2.1. General .....	4
<b>3. MEASURING INSTRUMENT CALIBRATION .....</b>	<b>5</b>
<b>4. TEST EQUIPMENT LIST .....</b>	<b>6</b>
<b>5. DESCRIPTION OF TESTS .....</b>	<b>7</b>
5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power .....	7
5.2. Radiated Spurious & Harmonic Emission .....	8
5.3. Peak-Average Ratio .....	9
5.4. Occupied Bandwidth .....	10
5.5. Spurious and Harmonic Emission at Antenna Terminal .....	10
5.5.1. Occupied Bandwidth Emission Limits .....	10
5.5.2. Conducted Spurious Emission .....	12
5.6. Frequency Stability / Temperature Variation .....	13
<b>6. TEST DATA .....</b>	<b>14</b>
6.1. Equivalent Isotropic Radiated Power (E.I.R.P.) .....	14
6.2. GSM1900 Radiated Spurious & Harmonic measurement .....	15
6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table .....	16
6.4. Frequency Stability .....	17
6.4.1. GSM1900 Frequency Stability Table .....	17
6.4.2. GSM1900 Frequency Stability Graph .....	18
<b>7. CONCLUSION .....</b>	<b>20</b>
<b>8. TEST PLOTS .....</b>	<b>21</b>



# MEASUREMENT REPORT

## 1. FCC Certification Information

The following information is in accordance with FCC Rules, 47CFR Part2, Subpart J, Sections 2.1033 – 2.1055.


### 1.1. §2.1033 General Information

- Applicant Name : SAMSUNG ELECRONICS CO., LTD.
- Address : 416 Maetan3-Dong, Yeongtong-gu, Suwon City  
Gyeonggi-Do, Korea 443-742
- Attention : SungJoo KIM, Engineering Manager (QA Lab)
- FCC ID : A3LSWDM3510
- Quantity : Quantity production is planned
- Emission Designators : 244KGXW(GSM1900), 242KG7W(GSM1900 EDGE)
- Tx Freq. Range : 1850.2MHz -1909.8MHz (GSM1900)
- Rx Freq. Range : 1930.2MHz - 1989.8MHz (GSM1900)
- Max. Power Rating : 0.883 W EIRP GSM1900 (29.46dBm)  
0.621 W EIRP GSM1900 EDGE(27.93dBm)
- FCC Classification(s) : PCS Licensed Portable Tx Held to Ear (PCE)
- Equipment (EUT) Type : Single-Band PCS GSM/EDGE Phone with Bluetooth
- Frequency Tolerance :  $\pm 0.00025\%$  (2.5ppm)
- FCC Rule Part(s) : §24(E), §2.
- Dates of Test : June 09-10, 2008
- Place of Test : SAMSUNG Lab,
- Test Report S/N : FF-119-R1

## 2. INTRODUCTION

### 2.1. General


These measurement test were conducted at **SAMSUNG ELECTRONICS CO., LTD(SUWON)**. The site address is 416 Maetan3-Dong, Yeongtong-gu, Suwon City, Gyeonggi-Do, Korea 443-742 The site have 1 Fully-anechoic chamber and measurement facility.

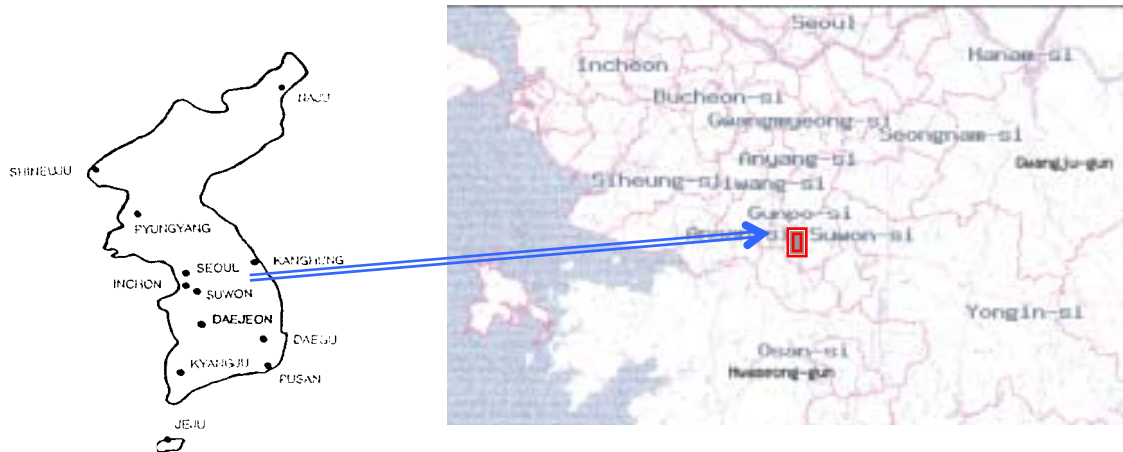

**Figure1. Map of the Suwon City area.**

### **Measurement Procedure**

The radiated and spurious measurements were made Fully-anechoic chamber at a 3-meter test range (see Figure2). The equipment under testing was placed on the rotating device at the same height and at a distance of 3-meters from the receive antenna. The rotating device which can rotate horizontal axis was mounted on the turn unit to facilitate rotation around a vertical axis. The measurement was made for each horizontal/vertical position combination with receive antenna horizontally polarized. This measurement was repeated with receive antenna vertically polarized. The substitution antenna will replace the EUT antenna it the same position and in vertical polarization. The frequency of the signal generator shall be set to the frequencies that were measured on the EUT. The signal generator, output level, shall be adjusted until an equal or a known related level to what was measured from the EUT is obtained in the spectrum analyzer. This level was recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

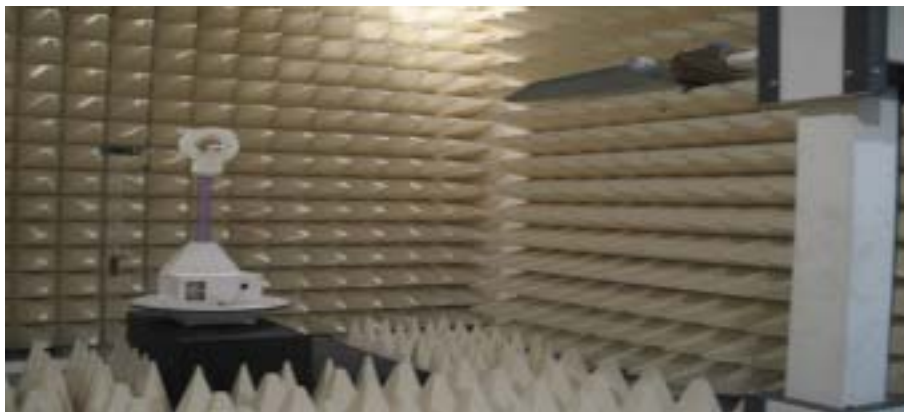

**Figure2. Photograph of 3m Fully-Anechoic Chamber**



### **3. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



#### 4. TEST EQUIPMENT LIST

<b>Name Of Equipment</b>	<b>Model</b>	<b>Serial No.</b>	<b>Due Date</b>
Spectrum Analyzer	ESI26	836119/010	2008-10-17
	E4440A(3Hz~26.5GHz)	MY46187454	2009-03-03
	E4440A(3Hz~26.5GHz)	MY41000233	2008-07-23
Signal Generator	SMR20	835197/030	2008-12-05
Network Analyzer	8753E	JP38160590	2008-06-26
Power Sensor	8485A	3318A19924	2008-10-01
Power Meter	E4419B	GB41293846	2008-09-06
Pre-Amplifier	8449B	3008A00691	2008-12-24
Communication test set	8960	GB42230535	2009-01-02
	8960	GB42360886	2008-07-03
Controller	CO2000	CO2000/424	Not Required
Turn Unit	CT0800	CT0800/057	Not Required
Rotating Device	DE3600-RH-PR	DE3600-RH-PR/050	Not Required
Antenna Master	MA4000	MA4000/204	Not Required
Horn Antenna	HF906	100134	2009-10-24
Dipole Antenna	UHA-9105	9105-2412	2009-11-07
Communication test set	CMU200	109162	2008-10-17
Receive Antenna	HL040	353255/019	2008-09-20
Power Supply	E3640A	MY40003594	2008-06-25
Divider	11636B	51946	Not Required
	11636B	51942	Not Required
High Pass Filter	WHK1.0/15G-10SS	1	Not Required
	WHK/3.5/18G-10SS	4	Not Required
Environmental Chamber	SH-241	92000549	2008-11-15
Shielded Fully Anechoic Chamber	CHAMBER	ANT0001	Not Required

## 5. DESCRIPTION OF TESTS

### 5.1. Effective Radiated Power / Equivalent Isotropic Radiated Power

#### Test Set-up for the ERP/EIRP TEST

Effective Radiated Power Output and Equivalent Isotropic Radiated Power output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

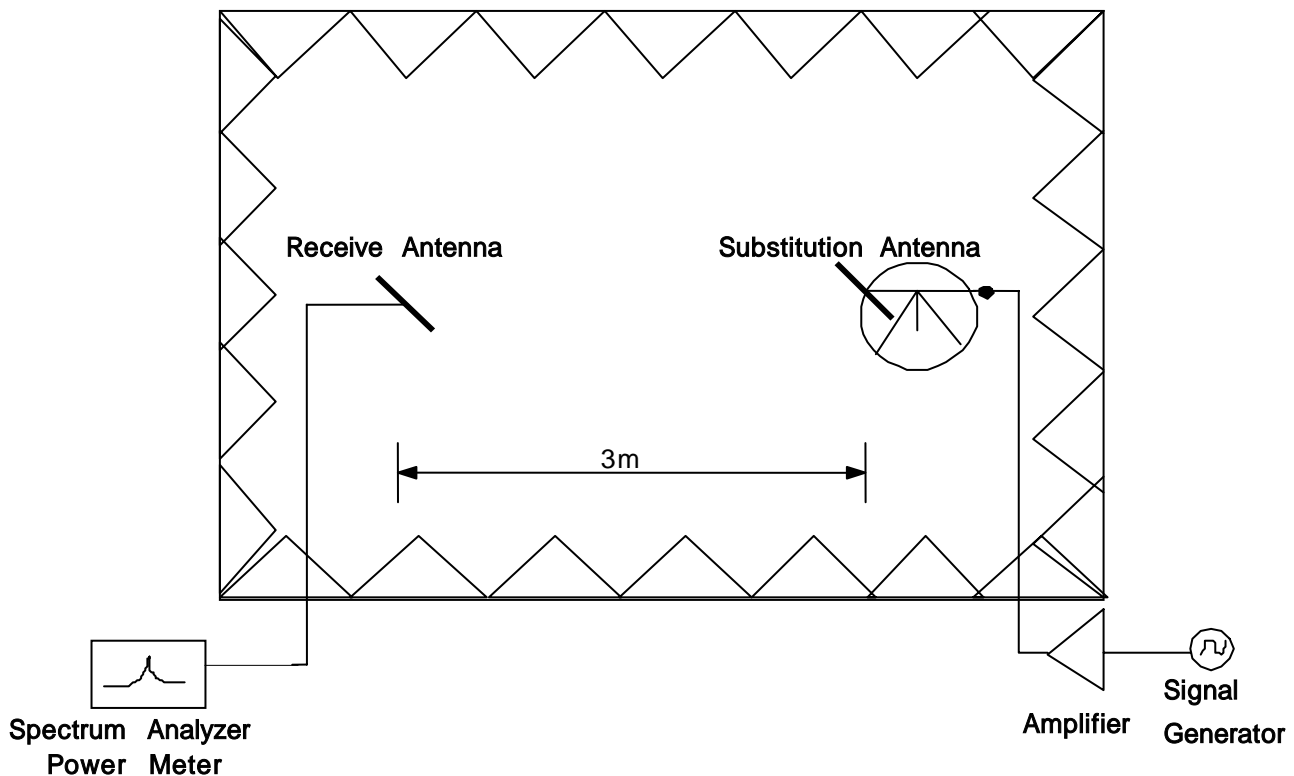


Figure 3. Diagram of ERP/EIRP test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. For GSM signals, an average detector is used, with RBW=VBW=3MHz, SPAN=10MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of dipole is measured. The ERP and EIRP are recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

## 5.2. Radiated Spurious & Harmonic Emission

### Test Set-up for the Radiated Emission TEST

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004

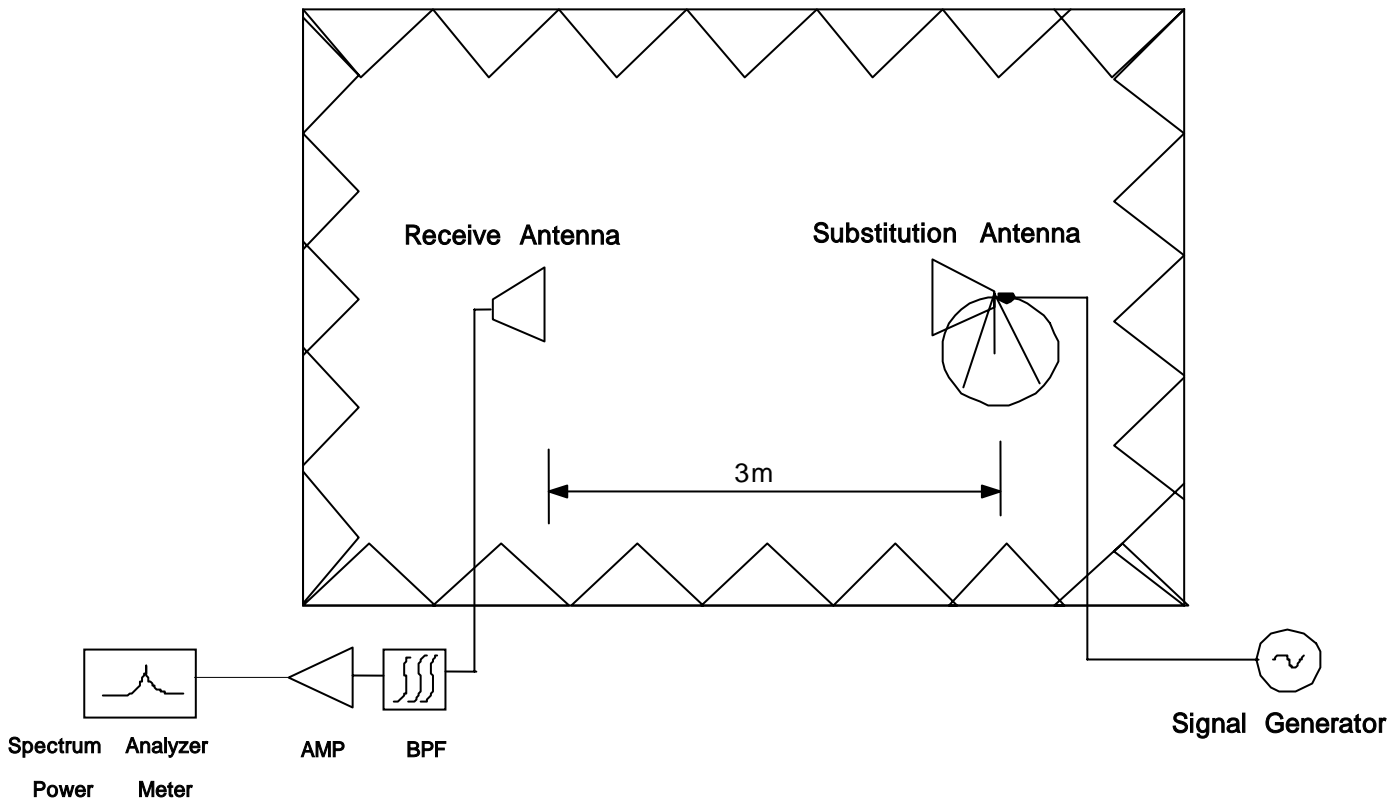


Figure 4. Diagram of Radiated Spurious & Harmonic test Set-up

The EUT was placed on the rotating device at 3-meters from the receive antenna. The turn unit and rotating device was adjusted for the highest reading on the receive spectrum analyzer. The Spectrum was investigated from 30MHz to the 10<sup>th</sup> Harmonic of the fundamental. A peak detector is used, with RBW=VBW=1MHz. The value that we could measure was only reported. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.



## SAMPLE CALCULATION

### **Example: Channel 661 , Second Harmonic(3760.00MHz)**

The receive analyzer reading at 3meters with the EUT on the turntable was  $-81.0\text{dBm}$ . The gain of the substituted antenna is  $8.1\text{dBi}$ . The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0\text{dBm}$  of the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0\text{dB}$  at  $3760.00\text{MHz}$ . So  $6.1\text{dB}$  is added to the signal generator reading of  $-30.9\text{dBm}$  yielding  $-24.8\text{dBm}$ . The fundamental EIRP was  $25.5\text{dBm}$  so this harmonic was  $25.5\text{dBm} - (-24.8) = 50.3\text{dBc}$ .

### 5.3.Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. An average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth.

## 5.4. Occupied Bandwidth

### **Test Procedure**

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

Plots of the EUT's occupied bandwidth are shown herein.

## 5.5. Spurious and Harmonic Emission at Antenna Terminal

### 5.5.1. Occupied Bandwidth Emission Limits

- (a) On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB.
- (b) Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- (c) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- (d) The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.



<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A	1850 – 1865	1930 – 1945
B	1870 – 1885	1950 – 1965
C	1895 – 1910	1975 – 1990
D	1865 – 1870	1945 – 1950
E	1885 – 1890	1965 – 1970
F	1890 – 1895	1970 – 1975

**Table 1. Broadband PCS Service Frequency Blocks**

<b>BLOCK</b>	<b>Freq. Range (MHz) Transmitter (Tx)</b>	<b>Freq. Range (MHz) Receiver (Rx)</b>
A* Low + A	824 ~ 835	869 ~ 880
B	835 ~ 845	880 ~ 890
A* High	845 ~ 846.5	890 ~ 891.5
B*	846.5 ~ 849	891.5 ~ 894

**Table 2. Cellular Service Frequency Blocks**

## 5.5.2. Conducted Spurious Emission

### **Minimum standard:**

On any frequency outside a license frequency block, the power of any emission shall be attenuated below the transmitter power(P) by at least  $43+10\log(P)$ dB. Limit equivalent to -13dBm, calculation shown below.

$$43 + 10\log ( 0.883 \text{ W} ) = 42.46 \text{ dB}$$

$$29.46 \text{ dBm} - 42.46 \text{ dB} = -13 \text{ dBm}$$

Compliance with the out-of-band emissions requirement is based on test being performed with an analyzer resolution bandwidth of 1MHz. However in the 1MHz band immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the fundamental emissions bandwidth may be employed.

In case of GSM :  $0.01 * 273\text{KHz} = 2.73\text{KHz}$   
A Resolution BW of 3KHz was used for measurement at the band edges.

### **Test Procedure:**

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1% of the emission bandwidth to show compliance with the -13dBm limit, in the 1MHz bands immediately outside and adjacent to the edge of the frequency block. The measurements are repeated for the EUT's highest channel. For the Out-of-Band measurements a 1MHz RBW was used to scan from 10MHz to 10GHz. (GSM1900 Mode : 10MHz to 20GHz). A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Plots are shown herein.

## 5.6. Frequency Stability / Temperature Variation

The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is carried from -30°C to +60°C using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification- The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025$  ( $\pm 2.5$ ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight "soak" at -30°C without any power applied.
3. After the overnight "soak" at -30°C (Usually 14~16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying to the transmitter.
4. Frequency measurements are made at 10°C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency measurements are at 10 intervals starting at -30°C up to +60°C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after re-applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE : The EUT is tested down to the battery endpoint.



## 6. TEST DATA

### 6.1. Equivalent Isotropic Radiated Power (E.I.R.P.)

Supply Voltage : 3.7VDC

Modulation : PCS 1900

#### Reference level

Frequency (MHz)	Output (dBm)	Polarization (H/V)	S/A (dBm)	Ant gain (dBi)	Ref level (dBm)
1850.20	29.00	H	-9.55	9.70	-20.24
		V	-9.69	9.70	-19.39
1880.00	26.00	H	-13.01	9.70	-22.71
		V	-12.83	9.70	-22.53
1909.80	25.00	H	-14.10	9.70	-23.80
		V	-13.73	9.70	-23.43

#### Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-19.78	H	56/180	29.46	0.883	Standard
1880.00	-22.65	H	96/180	26.06	0.404	Standard
1909.80	-23.75	H	96/176	25.05	0.320	Standard

#### EDGE Result

Frequency (MHz)	Tested level (dBm)	Polarization (H/V)	Azimuth (angle)	EIRP (dBm)	EIRP (W)	Battery
1850.20	-21.31	H	57/178	27.93	0.621	Standard

**NOTE :** Standard batteries are the only battery options for this phone

- All modes of operation were investigated, and the worst-case results are reported.

**Radiated measurements at 3 meters by Substitution Method**



## 6.2. GSM1900 Radiated Spurious & Harmonic measurement

Operating Frequency : 1850.2 MHz(Low), 1880.00 MHz(Middle), 1909.80 MHz(High)

Measured Output Power : 29.46 dBm = 0.883 W 31.95dBm = 1.567W

Modulation Signal : GSM1900

Limit :  $43 + 10\log_{10}(P) = 42.46$  dBc

### Result

Channel	Harmonic	Frequency (MHz)	From EUT Tested level (dBm)	Result (dBc)	POL (H/V)
512	2	3700.40	-53.70	59.52	V
	3	5550.60	-60.00	61.09	H
	4	7400.80	-54.78	51.30	H
	5	9251.00	-62.68	53.29	H
	6	11101.20	-60.91	48.45	H
	7	12951.40	-62.87	48.84	V
661	2	3760.00	-50.11	55.07	H
	3	5640.00	-63.38	64.08	V
	4	7520.00	-54.08	51.00	H
	5	9400.00	-64.44	55.70	H
	6	11280.00	-58.95	47.16	V
	7	13160.00	-63.61	48.55	V
810	2	3819.60	-50.14	55.45	H
	3	5729.40	-61.58	62.14	V
	4	7639.20	-54.75	51.09	H
	5	9549.00	-64.90	57.02	V
	6	11458.80	-60.04	47.86	V
	7	13368.60	-67.71	51.34	V

### NOTE :

1. "-" Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. The spectrum is measured from 30MHz to the 10<sup>th</sup> harmonic and All modes of operation were investigated, and the worst-case results are reported.

### Radiated Spurious Emission measurements at 3 meters by Substitution Method



### 6.3. GSM1900 Radiated Spurious & Harmonic Conversion Table

Date : 2008.06.102005 . 04 . 26.  
 Test Engineer : JH WOoye Park

Tx Cable loss  
 Tx Horn Ant Gain  
 Tx Level to radiate -13dBm  
 ESI Level received from Tx with -13dBm  
 Tested Level from EUT  
 = EIRP - (-13 + - )

CH	Har	Frequency (MHz)	Tx C/L dB	Tx Horn Gain dBi	Tx Level dBm	ESI Level : H dBm	ESI Level : V dBm	Tested EUT Level : H dBm	Tested EUT Level : V dBm	Result EUT : H (dBc)	Result EUT : V (dBc)
512	2	3700.40	-13.91	12.40	-11.50	-36.82	-36.64	-54.17	-53.70	59.81	59.52
	3	5550.60	-18.04	12.90	-7.90	-41.37	-41.37	-60.00	-61.50	61.09	62.59
	4	7400.80	-20.27	10.50	-3.20	-45.94	-45.35	-54.78	-55.41	51.30	52.52
	5	9251.00	-23.06	11.20	-1.10	-51.85	-49.57	-62.68	-62.74	53.29	55.63
	6	11101.20	-25.92	11.60	1.30	-54.92	-54.59	-60.91	-62.16	48.45	50.03
	7	12951.40	-28.16	12.90	2.30	-56.76	-56.49	-64.84	-62.87	50.54	48.84
661	2	3760.00	-14.05	12.40	-11.40	-37.50	-36.99	-50.11	-53.08	55.07	58.55
	3	5640.00	-18.03	12.90	-7.90	-41.30	-41.76	-64.49	-63.38	65.65	64.08
	4	7520.00	-20.41	10.60	-3.20	-45.54	-45.69	-54.08	-55.29	51.00	52.06
	5	9400.00	-22.44	11.60	-2.20	-51.20	-50.63	-64.44	-64.87	55.70	56.70
	6	11280.00	-26.22	12.10	1.10	-54.35	-54.25	-60.16	-58.95	48.27	47.16
	7	13160.00	-27.70	12.80	1.90	-57.39	-57.52	-64.33	-63.61	49.40	48.55
810	2	3819.60	-14.59	12.40	-10.80	-37.15	-37.91	-50.14	-51.40	55.45	55.95
	3	5729.40	-18.34	13.00	-7.70	-41.97	-41.90	-62.03	-61.58	62.52	62.14
	4	7639.20	-20.39	11.20	-3.80	-46.12	-46.48	-54.75	-55.40	51.09	51.38
	5	9549.00	-23.07	11.70	-1.60	-50.91	-50.34	-65.60	-64.90	57.15	57.02
	6	11458.80	-26.21	11.70	1.50	-54.31	-54.64	-60.63	-60.04	48.78	47.86
	7	13368.60	-27.83	12.30	2.50	-58.60	-58.83	-68.83	-67.71	52.69	51.34

## 6.4. Frequency Stability

### 6.4.1. GSM1900 Frequency Stability Table

Operating Frequency : 1,880,000,000 Hz

Channel : 661

Reference Voltage : 3.7VDC


**Deviation Limit :  $\pm 0.00025$  % or 2.5ppm**

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency Error (Hz)	Frequency (Hz)	Deviation (%)	ppm
100%	3.70	+20(Ref)	20.00	1,880,000,020	0.000001	0.011
100%		-30	-15.63	1,879,999,984	-0.000001	-0.008
100%		-20	27.75	1,880,000,028	0.000001	0.015
100%		-10	18.21	1,880,000,018	0.000001	0.010
100%		0	31.86	1,880,000,032	0.000002	0.017
100%		+10	-15.90	1,879,999,984	-0.000001	-0.008
100%		+20	20.00	1,880,000,020	0.000001	0.011
100%		+30	-22.20	1,879,999,978	-0.000001	-0.012
100%		+40	21.97	1,880,000,022	0.000001	0.012
100%		+50	17.70	1,880,000,018	0.000001	0.009
100%		+60	24.11	1,880,000,024	0.000001	0.013
85%		3.35	+20	-24.89	1,879,999,975	-0.000001
115%	4.26	+20	23.65	1,880,000,024	0.000001	0.013
Batt.Endpoint	3.35	+20	-24.89	1,879,999,975	-0.000001	-0.013


**Note : The temperature is varied from -30 °C to +60 °C using an environmental chamber.**

**The EUT is tested down to the battery end point.**

### 6.4.2. GSM1900 Frequency Stability Graph

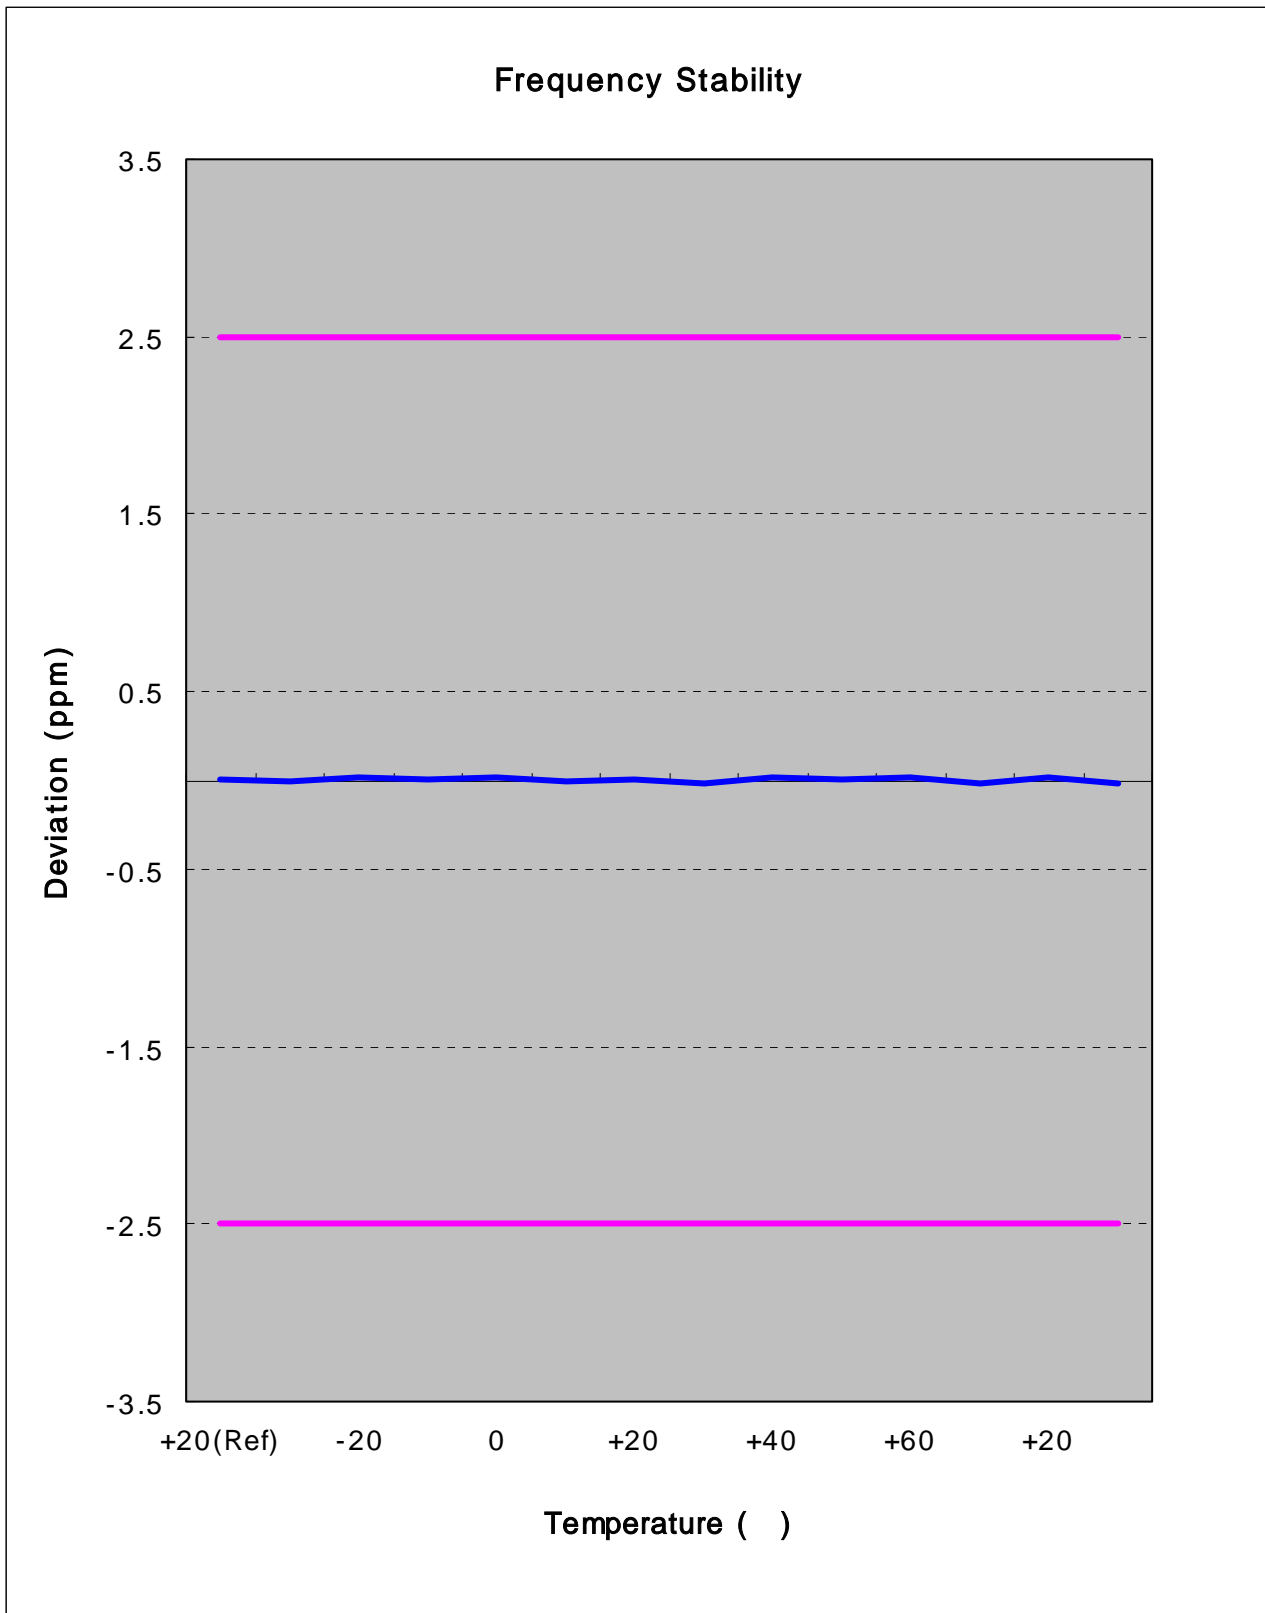

**Zoom IN**

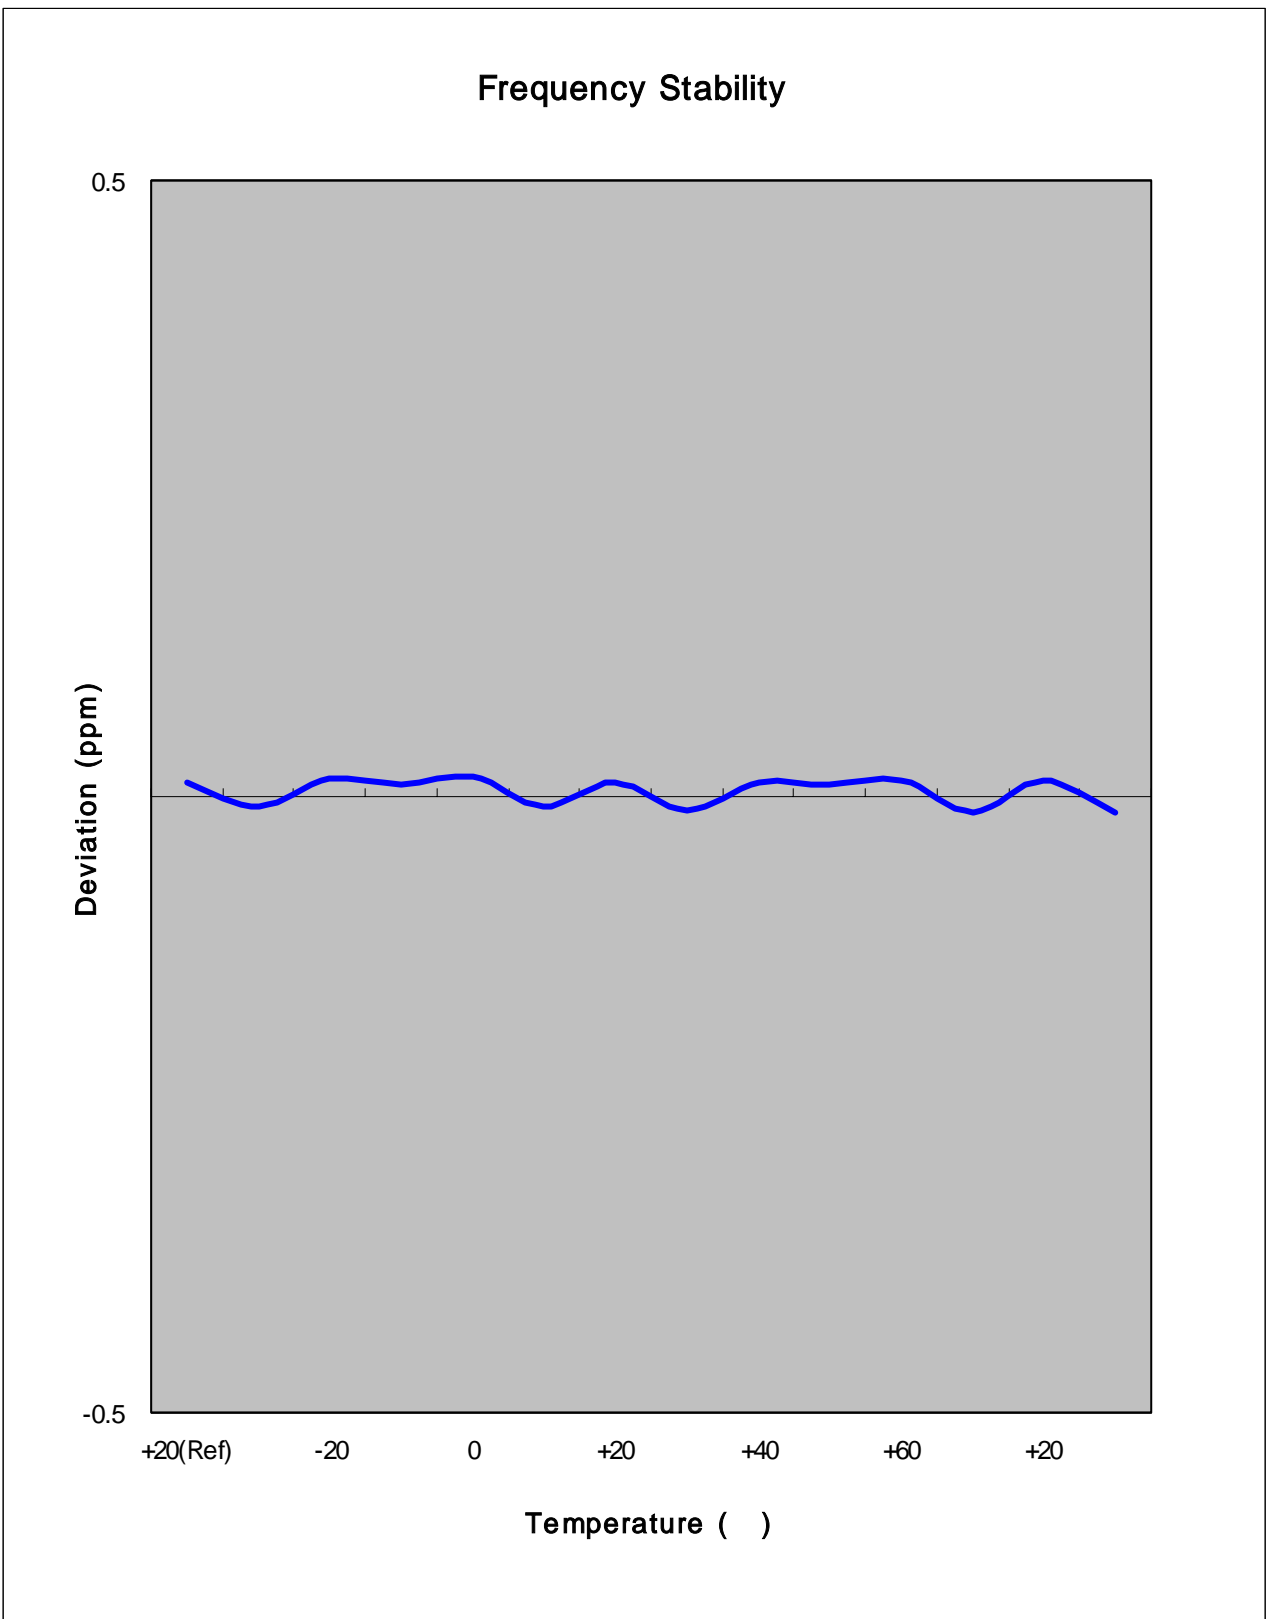



## **7. CONCLUSION**

The data collected shows that the SAMSUNG Single-Band PCS GSM/EDGE Phone with Bluetooth Dual-Band GSM850/1900 Phone with Bluetooth.

FCC ID : A3LSWDM3510 complies with all the requirements of Parts 2,242,22,24 of the FCC Rules.



## 8. TEST PLOTS

GSM1900

Agilent

R T

**Ch Freq** 1.8502 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSWDM3510 0BW Ch.512  
Ref 30 dBm Atten 40 dB

Center 1.850 200 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
243.1322 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		-254.686 Hz
<b>x dB Bandwidth</b>		310.647 kHz

**Freq/Channel**

**Center Freq**  
1.85020000 GHz

**Start Freq**  
1.84970000 GHz

**Stop Freq**  
1.85070000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

**Ch Freq** 1.88 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSWDM3510 0BW Ch.661  
Ref 30 dBm Atten 40 dB

Center 1.880 000 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
243.9723 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		-655.148 Hz
<b>x dB Bandwidth</b>		307.286 kHz

**Freq/Channel**

**Center Freq**  
1.88000000 GHz

**Start Freq**  
1.87950000 GHz

**Stop Freq**  
1.88050000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved



<p style="text-align: center;"><b>Ch Freq</b> 1.9098 GHz <span style="float: right;"><b>Trig</b> Free</span></p> <p>Occupied Bandwidth <span style="float: right;">[ ] [ ]</span></p> <hr/> <p>FCC ID:A3LSWDM3510 0BW Ch.810                  Ref 30 dBm Atten 40 dB</p> <div style="border: 1px solid black; padding: 5px;"> </div> <p style="font-size: small;">Center 1.909 800 GHz <span style="float: right;">Span 1 MHz</span>                  #Res BW 3 kHz <span style="margin-left: 100px;">#VBW 3 kHz</span> <span style="float: right;">#Sweep 1 s (601 pts)</span></p>	<p style="text-align: center;"><b>Freq/Channel</b></p> <p style="text-align: center;"><b>Center Freq</b> 1.90980000 GHz</p> <hr/> <p style="text-align: center;"><b>Start Freq</b> 1.90930000 GHz</p> <hr/> <p style="text-align: center;"><b>Stop Freq</b> 1.91030000 GHz</p> <hr/> <p style="text-align: center;"><b>CF Step</b> 100.000000 kHz Auto Man</p> <hr/> <p style="text-align: center;"><b>Freq Offset</b> 0.00000000 Hz</p> <hr/> <p style="text-align: center;"><b>Signal Track</b> On Off</p>								
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"><b>Occupied Bandwidth</b></td> <td style="width: 50%;"><b>Occ BW % Pwr</b> 99.00 %</td> </tr> <tr> <td style="text-align: center;">240.8599 kHz</td> <td style="text-align: center;"><b>x dB</b> -26.00 dB</td> </tr> <tr> <td><b>Transmit Freq Error</b></td> <td>-480.296 Hz</td> </tr> <tr> <td><b>x dB Bandwidth</b></td> <td>301.618 kHz</td> </tr> </table>		<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b> 99.00 %	240.8599 kHz	<b>x dB</b> -26.00 dB	<b>Transmit Freq Error</b>	-480.296 Hz	<b>x dB Bandwidth</b>	301.618 kHz
<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b> 99.00 %								
240.8599 kHz	<b>x dB</b> -26.00 dB								
<b>Transmit Freq Error</b>	-480.296 Hz								
<b>x dB Bandwidth</b>	301.618 kHz								
<p style="color: green; text-align: center;">File Operation Status, C:\TEMP.GIF file saved</p>									



FCC ID : A3LSWDM3510 Transmit Power 512CH



Measurement/Instrument Screen																										
Control	Transmit Power				TCH Parms																					
<p>Transmit Power Setup ▾</p> <hr/> <p>Swap Window Positions</p> <hr/> <p>1 of 2</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Burst 1</th> <th>Burst 2</th> <th>Burst 3</th> <th>Burst 4</th> </tr> </thead> <tbody> <tr> <td>Burst Power</td> <td>29.52</td> <td>----</td> <td>----</td> <td>----</td> </tr> <tr> <td>Estimated Carrier Power</td> <td>29.52</td> <td>----</td> <td>----</td> <td>----</td> </tr> </tbody> </table> <p style="text-align: right;">Single</p>					Burst 1	Burst 2	Burst 3	Burst 4	Burst Power	29.52	----	----	----	Estimated Carrier Power	29.52	----	----	----	<p>Downlink Traffic Power ▾</p> <hr/> <p>Traffic Band</p> <p style="text-align: center;">PCS</p> <hr/> <p>Traffic Channel</p> <p style="text-align: center;">512</p> <hr/> <p>MS TX Level</p> <p style="text-align: center;">0</p> <hr/> <p>Channel Mode Setup ▾</p> <hr/> <p>Return</p>						
	Burst 1	Burst 2	Burst 3	Burst 4																						
Burst Power	29.52	----	----	----																						
Estimated Carrier Power	29.52	----	----	----																						
	<p style="text-align: center;">Phase &amp; Frequency Error</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th></th> <th>Peak Phase °</th> <th>RMS Phase °</th> <th>Frequency Hz</th> </tr> </thead> <tbody> <tr> <td>Minimum</td> <td>6.00</td> <td>0.94</td> <td>-26.99</td> </tr> <tr> <td>Maximum</td> <td>10.45</td> <td>1.54</td> <td>20.84</td> </tr> <tr> <td>Average</td> <td>8.19</td> <td>1.20</td> <td>-12.17</td> </tr> <tr> <td>Pass/Fail</td> <td>Pass</td> <td>Pass</td> <td>Pass</td> </tr> </tbody> </table> <p style="text-align: right;">Single</p>					Peak Phase °	RMS Phase °	Frequency Hz	Minimum	6.00	0.94	-26.99	Maximum	10.45	1.54	20.84	Average	8.19	1.20	-12.17	Pass/Fail	Pass	Pass	Pass		
	Peak Phase °	RMS Phase °	Frequency Hz																							
Minimum	6.00	0.94	-26.99																							
Maximum	10.45	1.54	20.84																							
Average	8.19	1.20	-12.17																							
Pass/Fail	Pass	Pass	Pass																							
	Active Cell Connected		Sys Type: GSM																							
	IntRef	Offset	R T																							
				1 of 2																						

Measurement/Instrument Screen										
Control	Transmit Power							TCH Parms		
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				29.48	----	----	----	Traffic Band	PCS
Swap Window Positions	Estimated Carrier Power				29.48	----	----	----	Traffic Channel	661
	Single							MS TX Level	0	Channel Mode Setup
Phase & Frequency Error										
		Peak Phase °		RMS Phase °		Frequency Hz		Return		
Minimum		8.63		0.87		1.98				
Maximum		12.39		1.50		22.01		Channel Mode Setup		
Average		10.50		1.20		12.93		Return		
Pass/Fail		Pass		Pass		Pass				
50 / 50							Single			
			Active Cell Connected				Sys Type: GSM			
1 of 2				IntRef	Offset	R T			1 of 2	

Measurement/Instrument Screen										
Control	Transmit Power							TCH Parms		
Transmit Power Setup					Burst 1	Burst 2	Burst 3	Burst 4	Downlink Traffic Power	
	Burst Power				29.95	----	----	----	Traffic Band	PCS
Swap Window Positions	Estimated Carrier Power				29.95	----	----	----	Traffic Channel	810
	Single							MS TX Level	0	Channel Mode Setup
Phase & Frequency Error										
		Peak Phase °		RMS Phase °		Frequency Hz		Return		
Minimum		4.72		0.90		-18.50				
Maximum		6.91		1.45		1.79		Channel Mode Setup		
Average		5.70		1.17		-8.96		Return		
Pass/Fail		Pass		Pass		Pass				
50 / 50							Single			
			Active Cell Connected				Sys Type: GSM			
1 of 2				IntRef	Offset	R T			1 of 2	

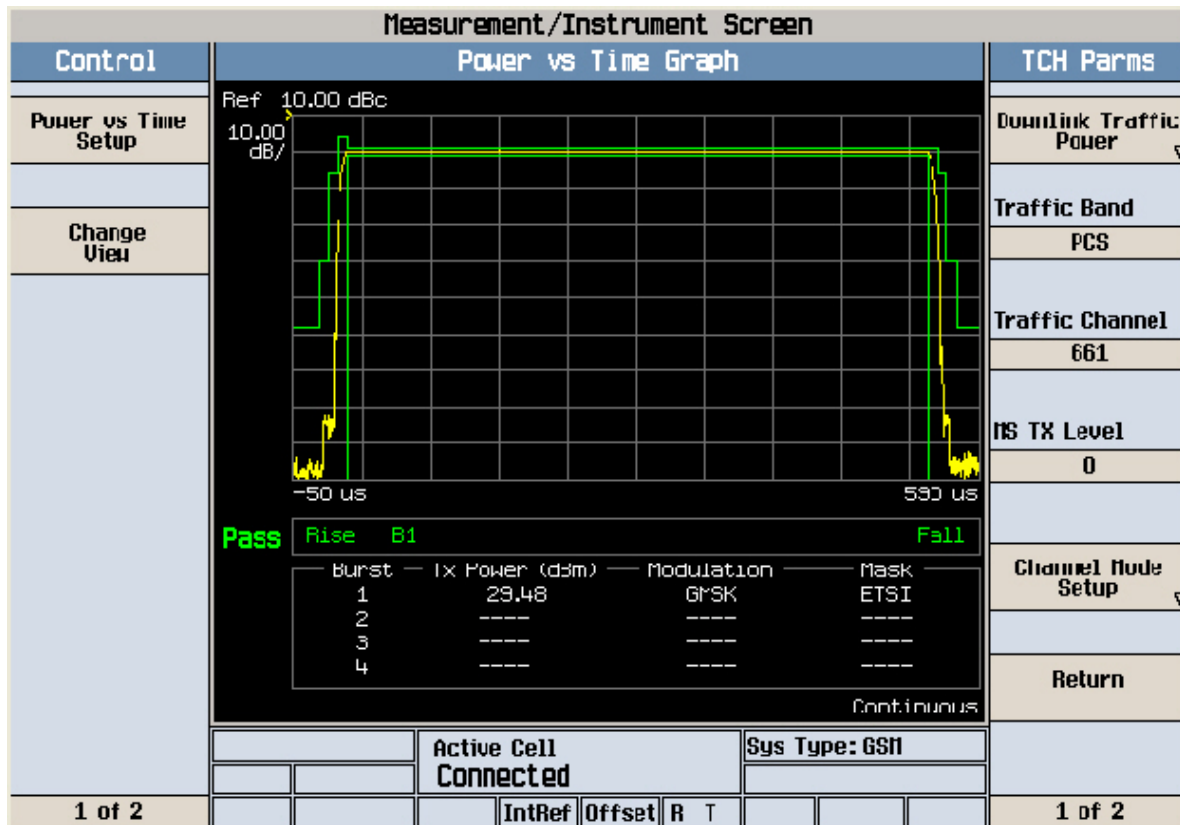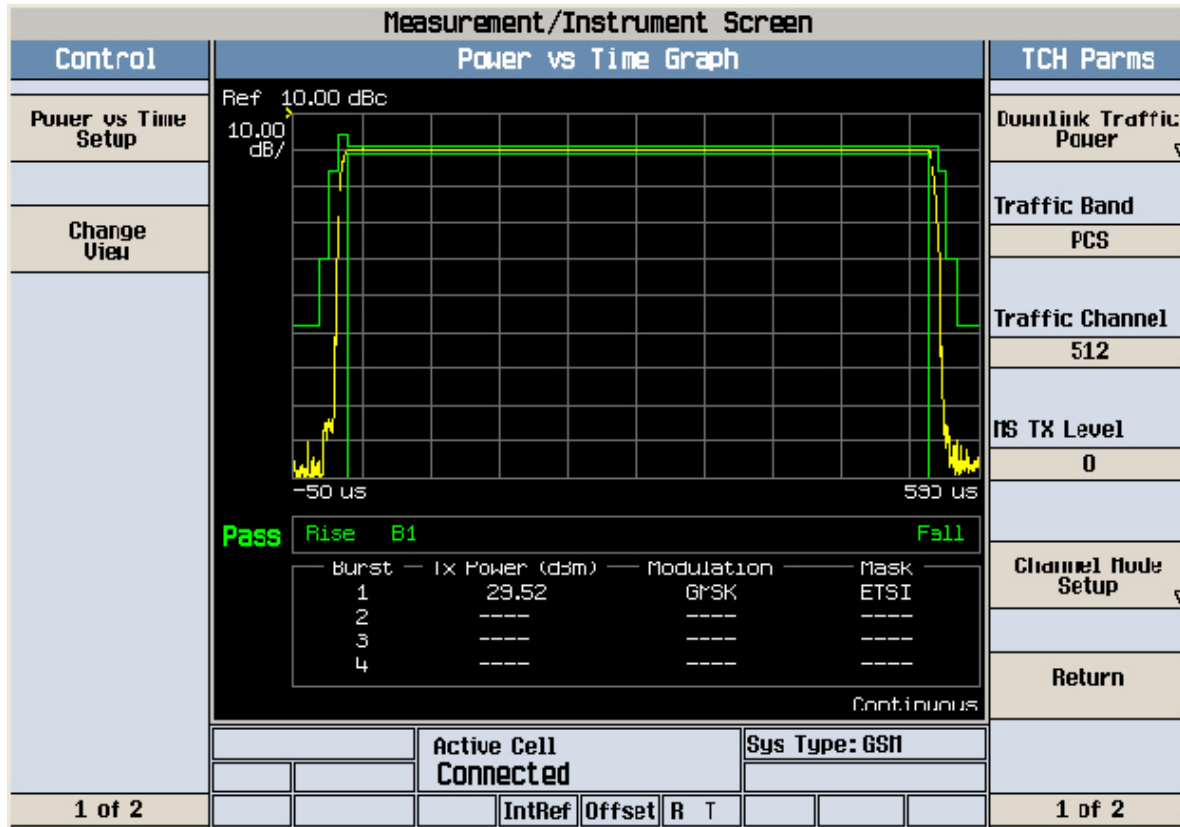

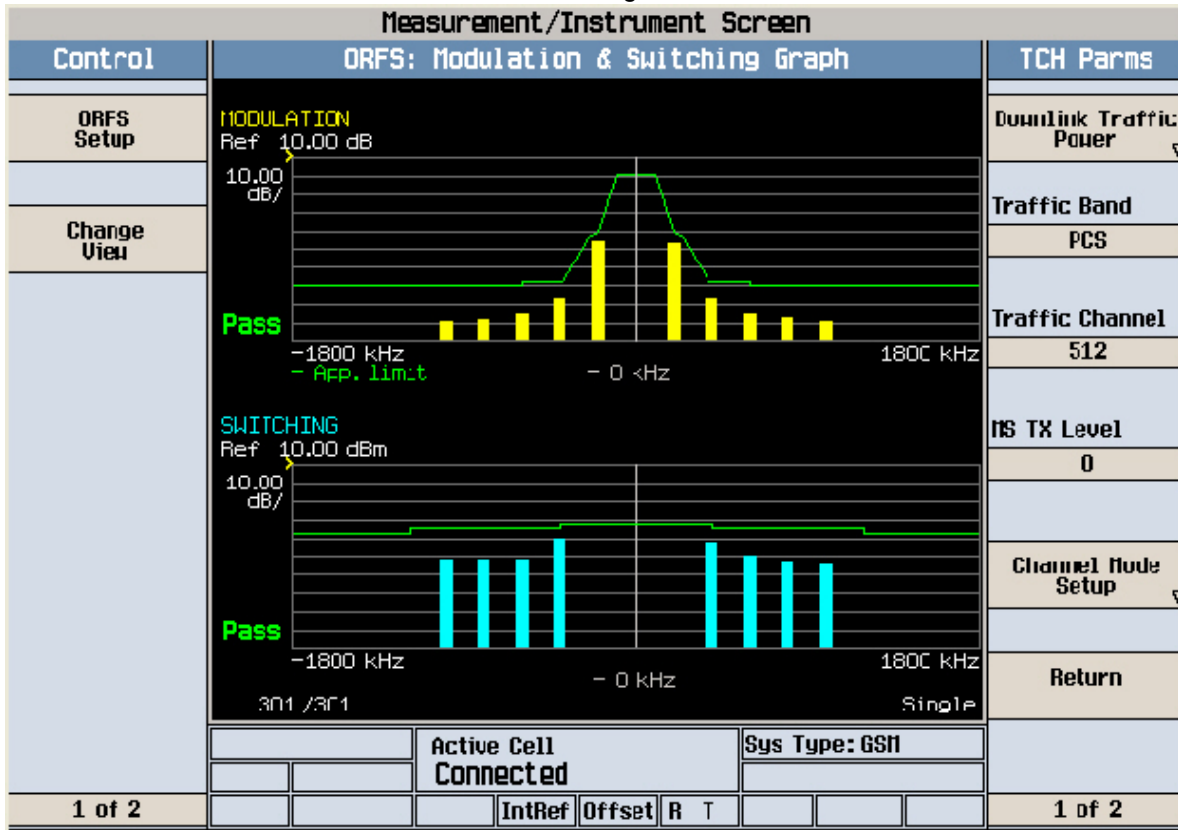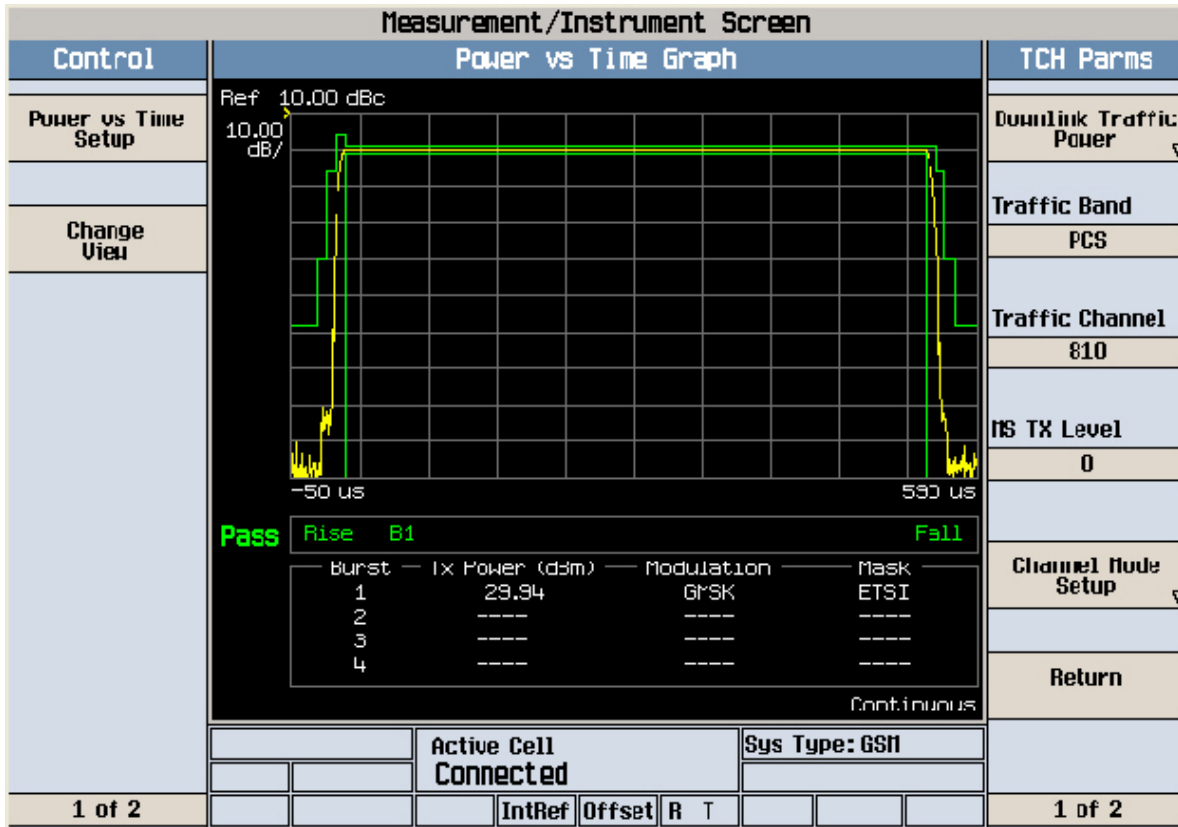

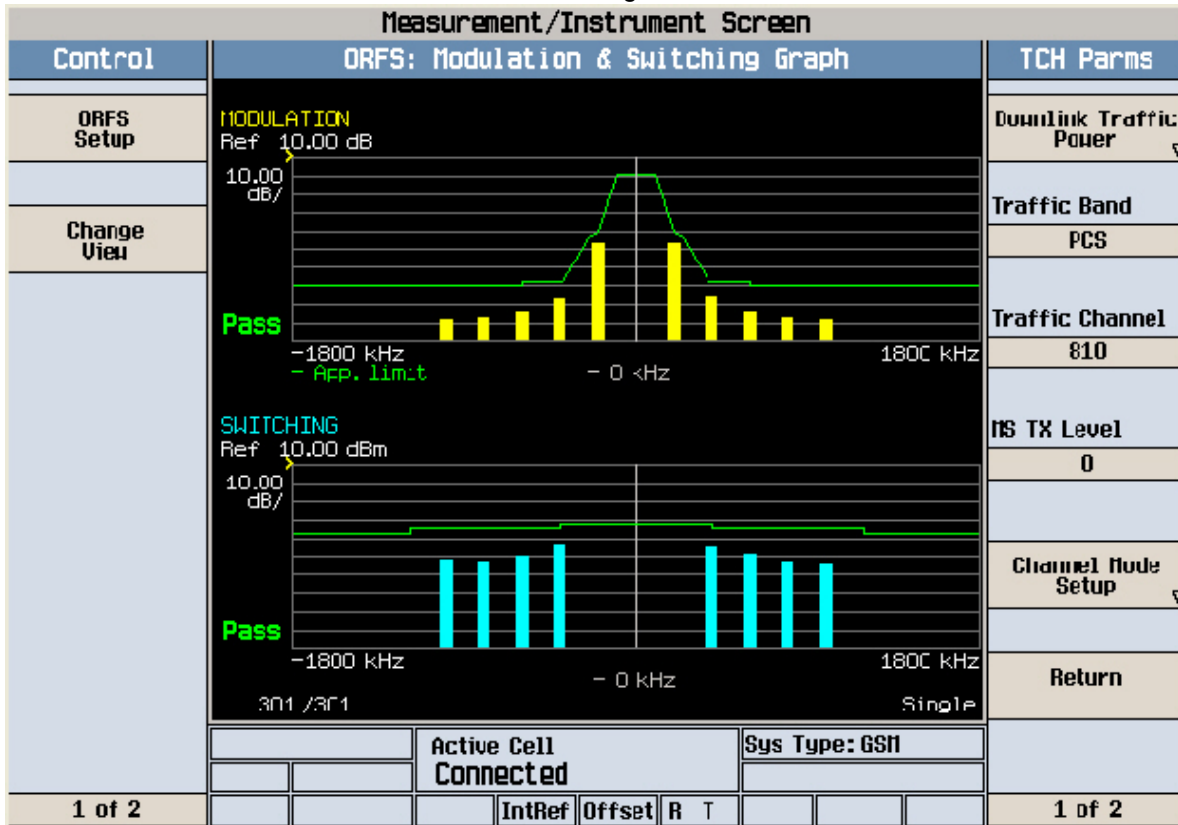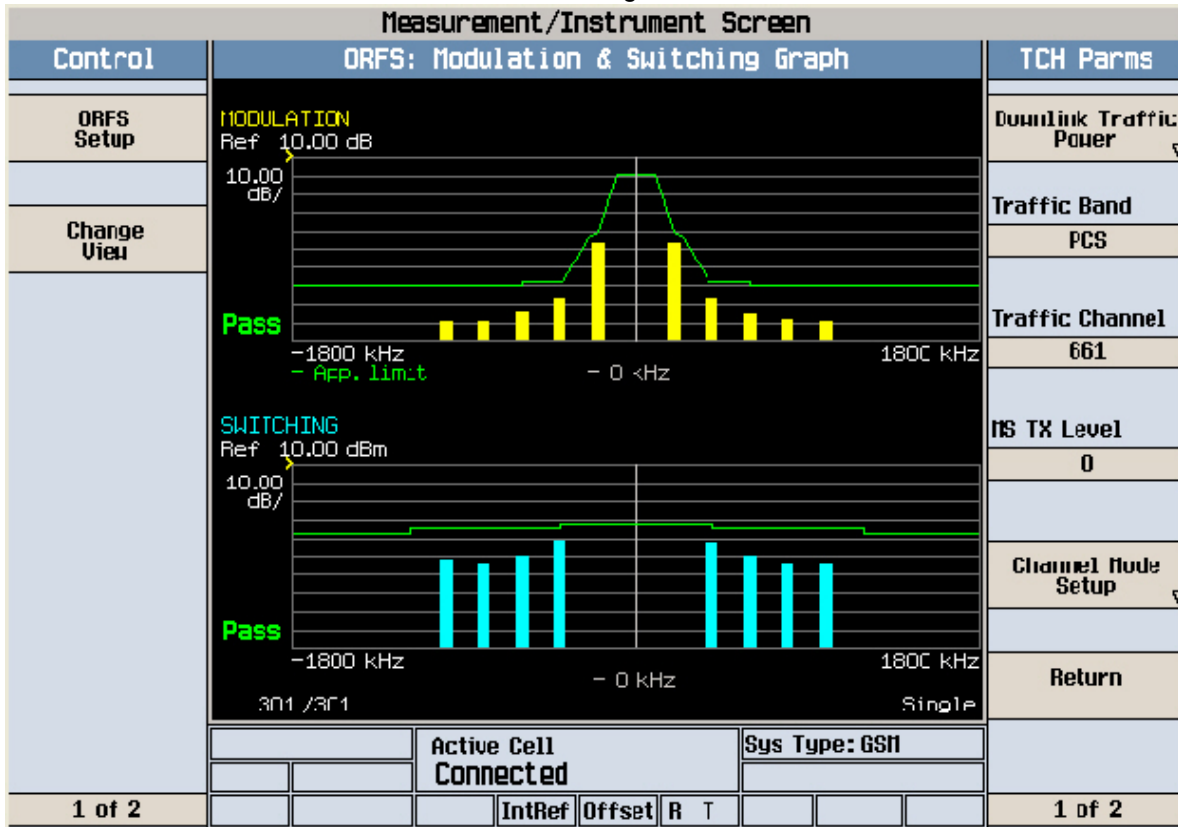

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM3510 Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.81

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

AC Coupled: unspecified below 20 MHz

Center 1.255 GHz

Span 2.49 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 4.16 ms (601 pts)

Center Freq  
1.25500000 GHz

Start Freq  
10.0000000 MHz

Stop Freq  
2.50000000 GHz

CF Step  
249.000000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz

Signal Track  
On Off

Copyright 2000-2006 Agilent Technologies

Agilent

R T

Freq/Channel

FCC ID:A3LSWDM3510 Cond Spur Ch.512

Ref 30 dBm

Atten 40 dB

#Peak

Log

10

dB/

Offst

8.81

dB

DI

-13.0

dBm

LgAv

M1 S2

S3 FC

$\mathcal{E}(f)$ :

FTun

Swp

Mkr1 370 MHz

-32.82 dBm

AC Coupled: unspecified below 20 MHz

Center 926 MHz

Span 1.833 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 3.08 ms (601 pts)

Center Freq  
926.350000 MHz

Start Freq  
10.0000000 MHz

Stop Freq  
1.84270000 GHz

CF Step  
183.270000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

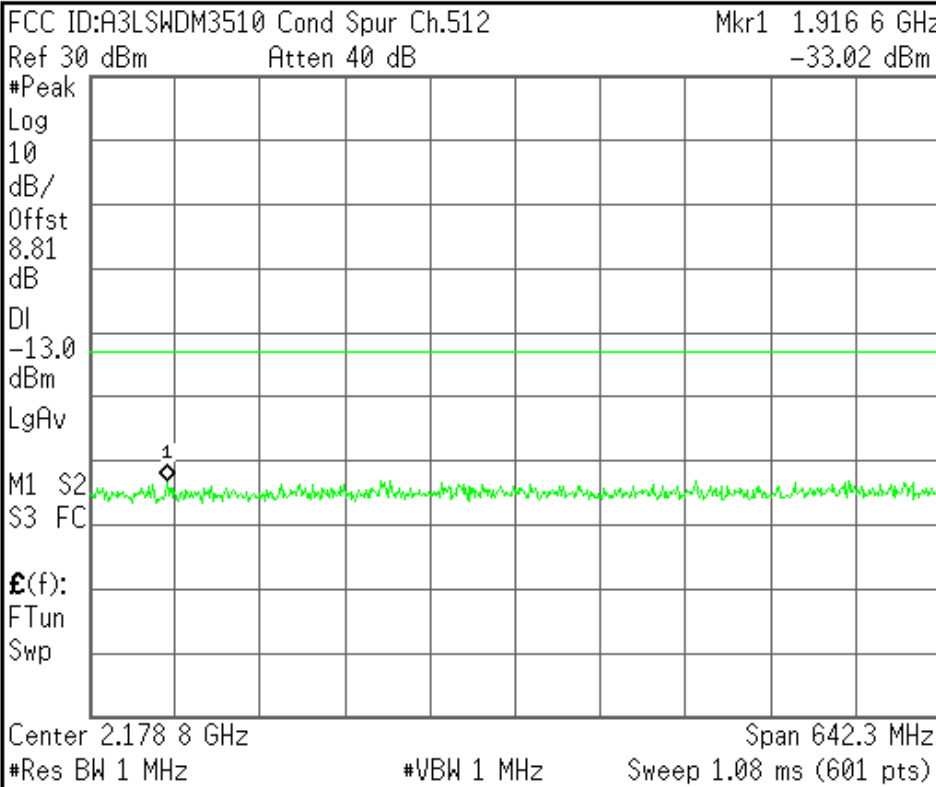

Center Freq  
2.17885000 GHz

Start Freq  
1.85770000 GHz

Stop Freq  
2.50000000 GHz

CF Step  
64.2300000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

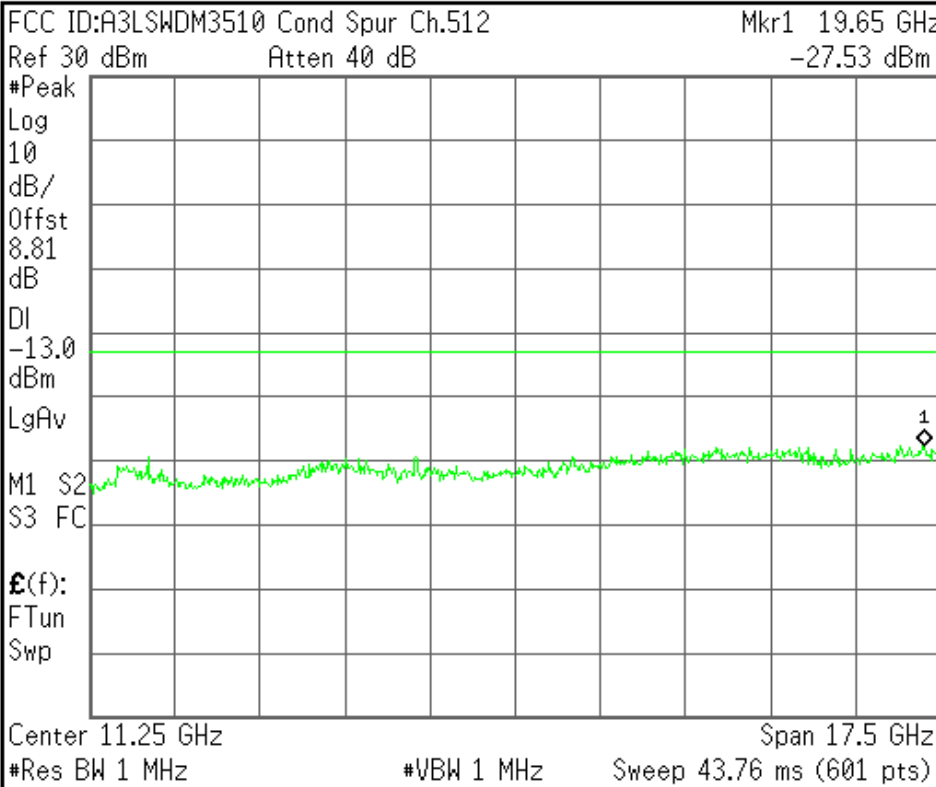

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

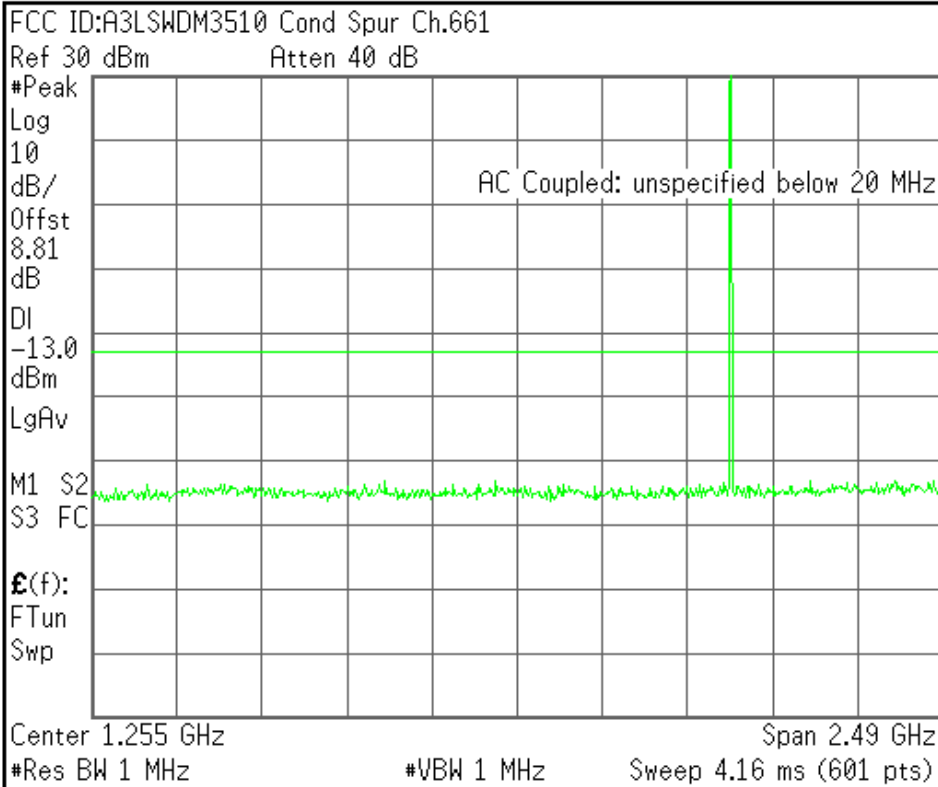


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.0000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

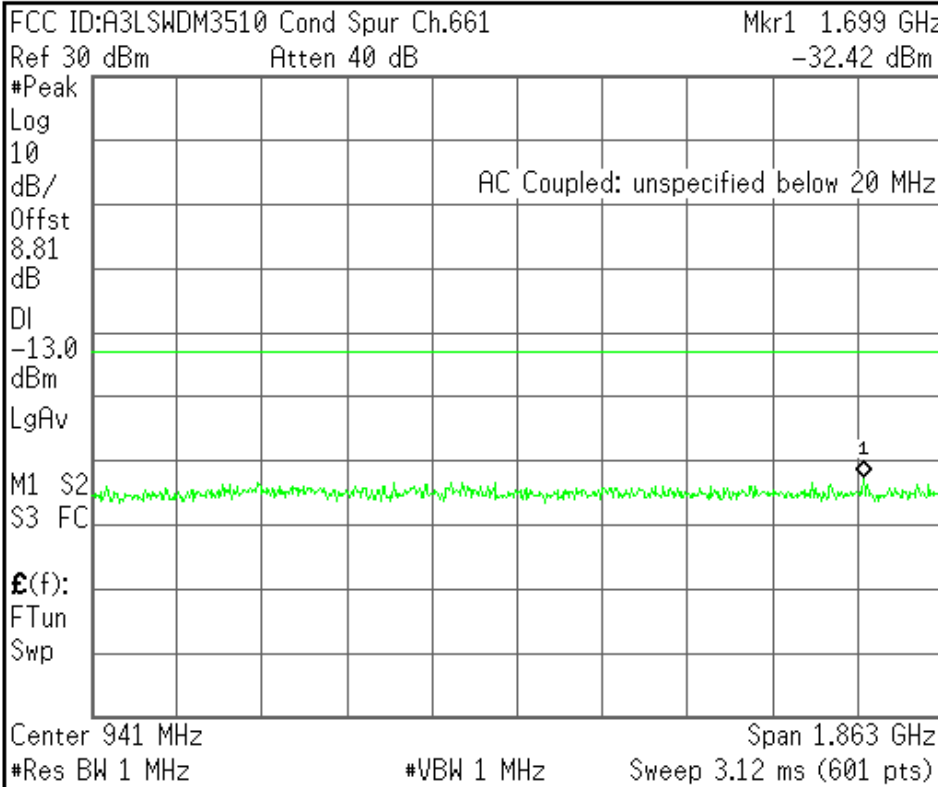


<b>Center Freq</b> 941.250000 MHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 1.87250000 GHz
<b>CF Step</b> 186.250000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

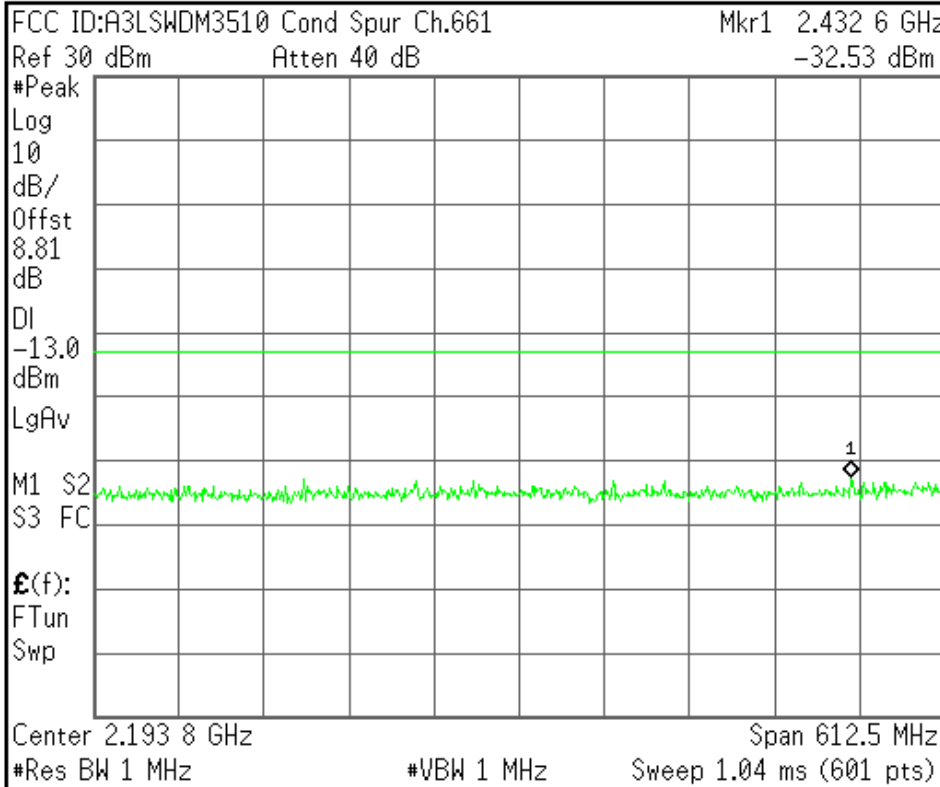


<b>Center Freq</b> 2.19375000 GHz
<b>Start Freq</b> 1.88750000 GHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 61.2500000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

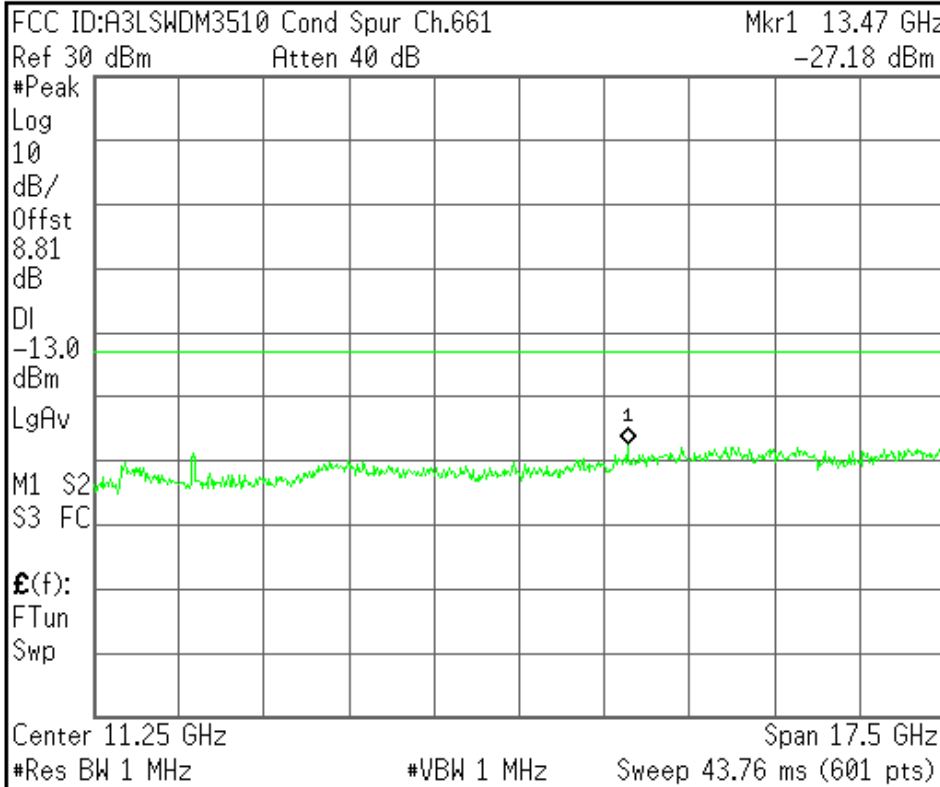


<b>Center Freq</b> 11.2500000 GHz
<b>Start Freq</b> 2.50000000 GHz
<b>Stop Freq</b> 20.0000000 GHz
<b>CF Step</b> 1.75000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

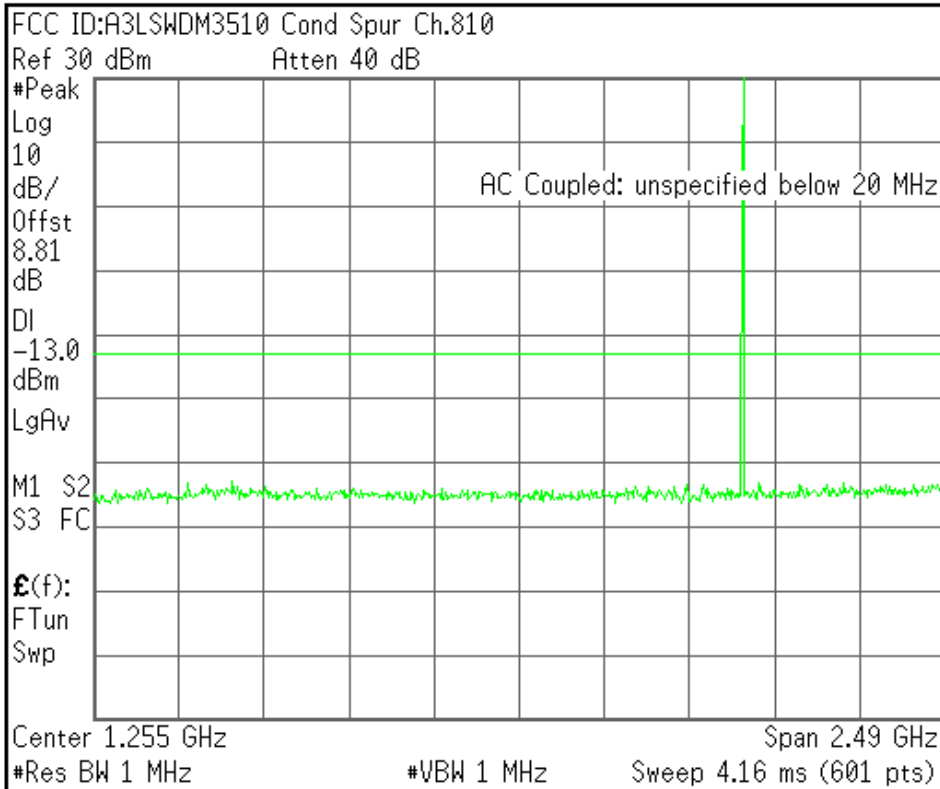


<b>Center Freq</b> 1.25500000 GHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 2.50000000 GHz
<b>CF Step</b> 249.0000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

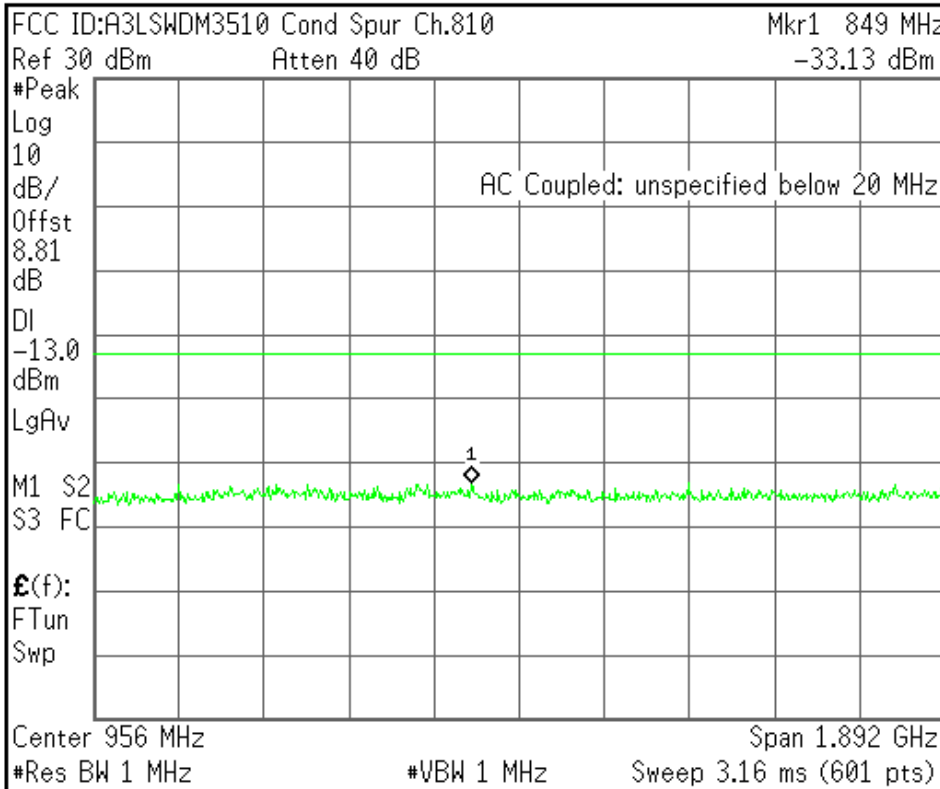


<b>Center Freq</b> 956.150000 MHz
<b>Start Freq</b> 10.00000000 MHz
<b>Stop Freq</b> 1.90230000 GHz
<b>CF Step</b> 189.2300000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

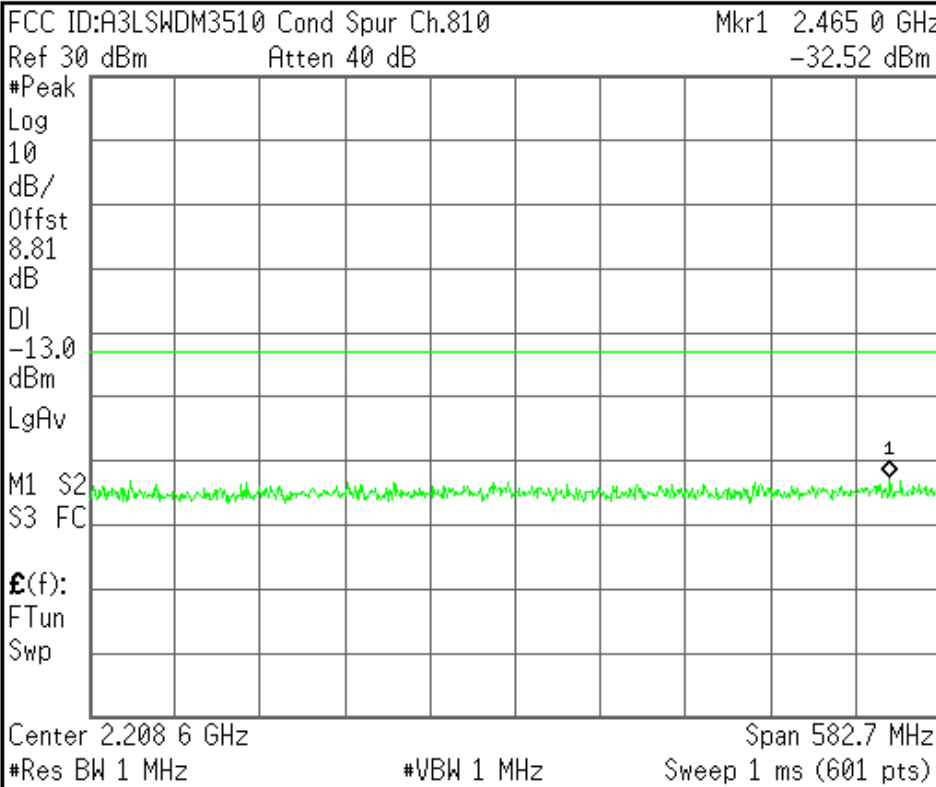

Center Freq  
2.20865000 GHz

Start Freq  
1.91730000 GHz

Stop Freq  
2.50000000 GHz

CF Step  
58.2700000 MHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

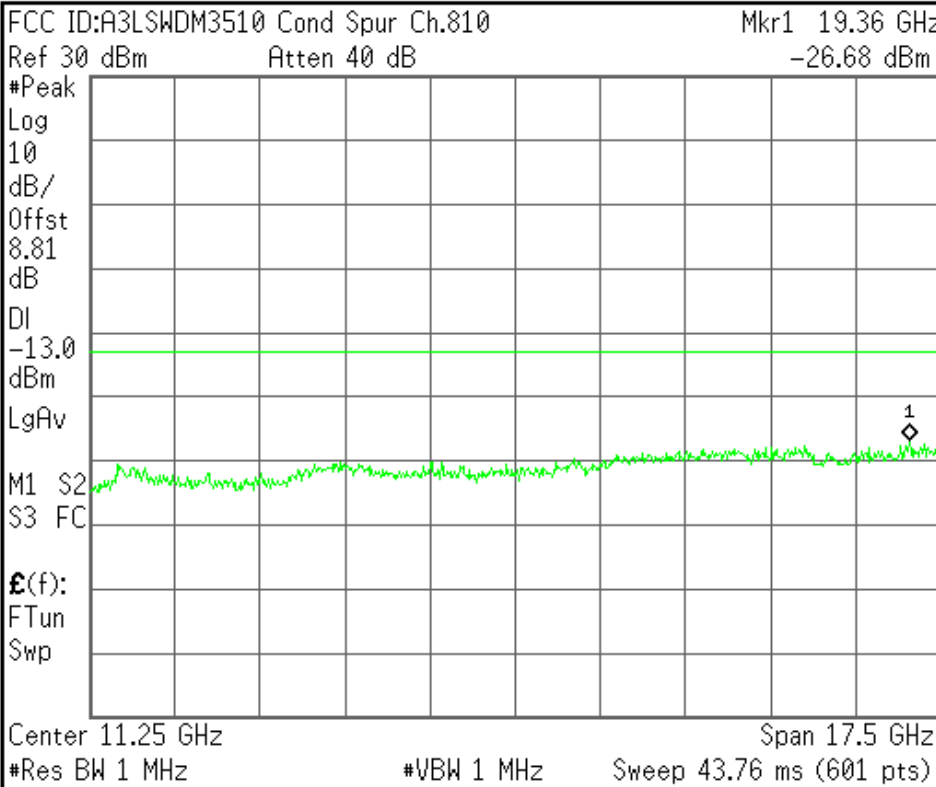

Center Freq  
11.2500000 GHz

Start Freq  
2.50000000 GHz

Stop Freq  
20.0000000 GHz

CF Step  
1.75000000 GHz  
Auto Man

Freq Offset  
0.00000000 Hz


Signal Track  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

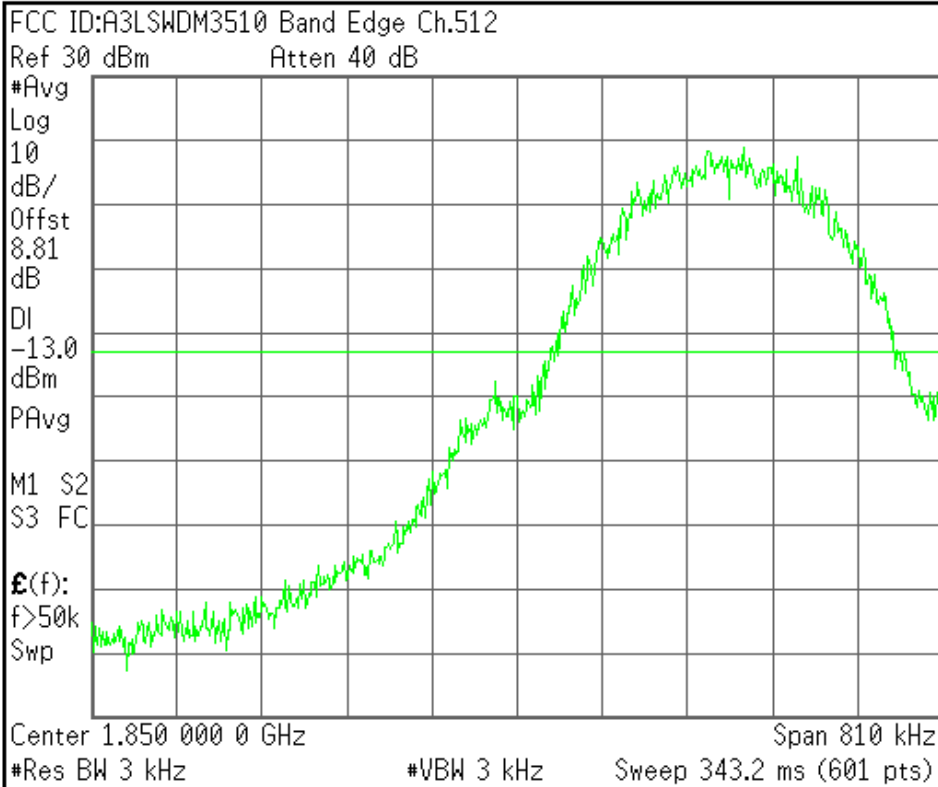


<b>Center Freq</b> 1.85000000 GHz
<b>Start Freq</b> 1.84959500 GHz
<b>Stop Freq</b> 1.85040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

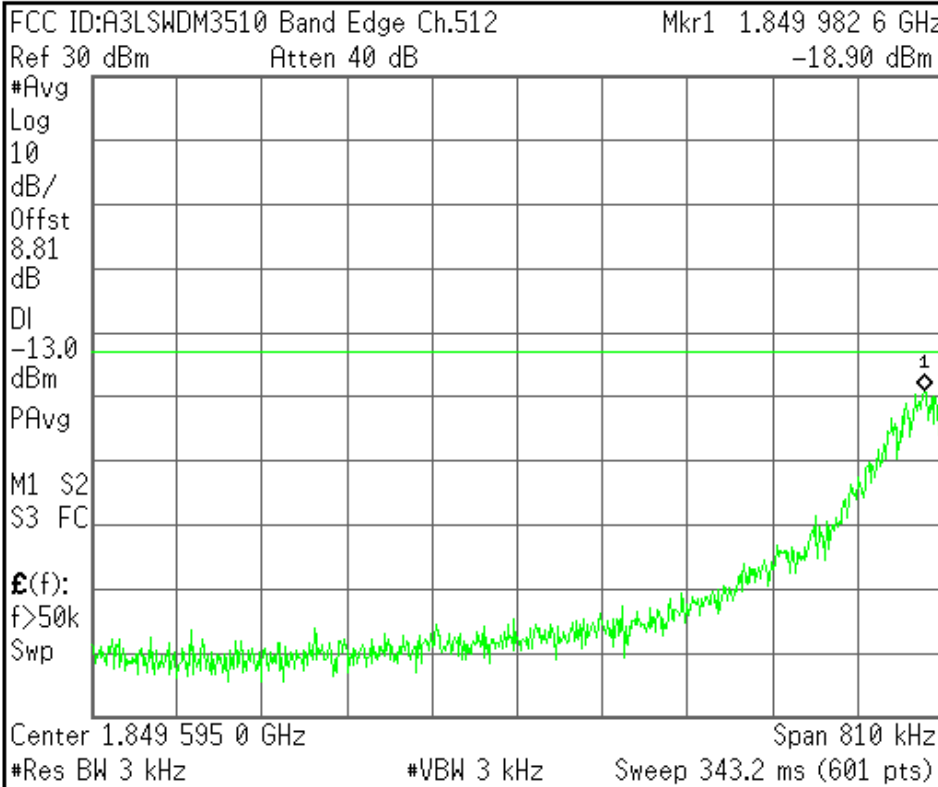


<b>Center Freq</b> 1.84959500 GHz
<b>Start Freq</b> 1.84919000 GHz
<b>Stop Freq</b> 1.85000000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

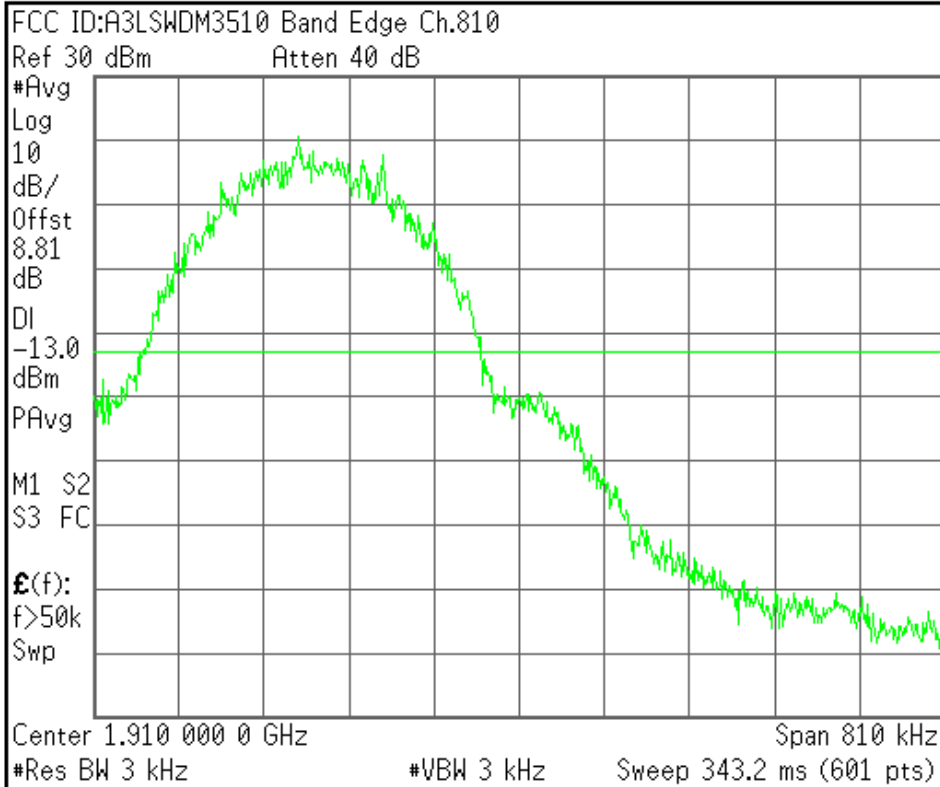


<b>Center Freq</b> 1.91000000 GHz
<b>Start Freq</b> 1.90959500 GHz
<b>Stop Freq</b> 1.91040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

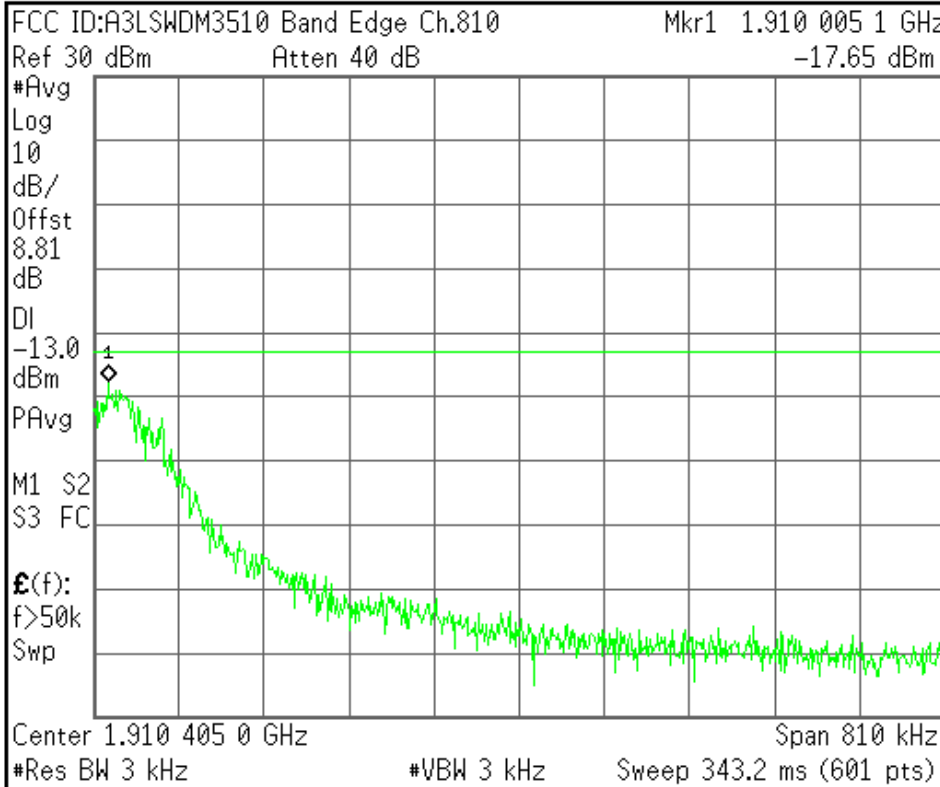

<b>Center Freq</b> 1.91040500 GHz
<b>Start Freq</b> 1.91000000 GHz
<b>Stop Freq</b> 1.91081000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off


File Operation Status, C:\TEMP.GIF file saved

FDD ID:A3LSWDM3510 P.A.R Ch.661  
 Ref 32 dBm Atten 40 dB

▲ Mkr1 0 Hz  
 -0.068 dB

#Avg 10  
 Log dB/  
 Offst 8.81  
 dB

#LgAv 100  
 V1 V2  
 S3 FC  
 £(f):  
 f>50k  
 Swp

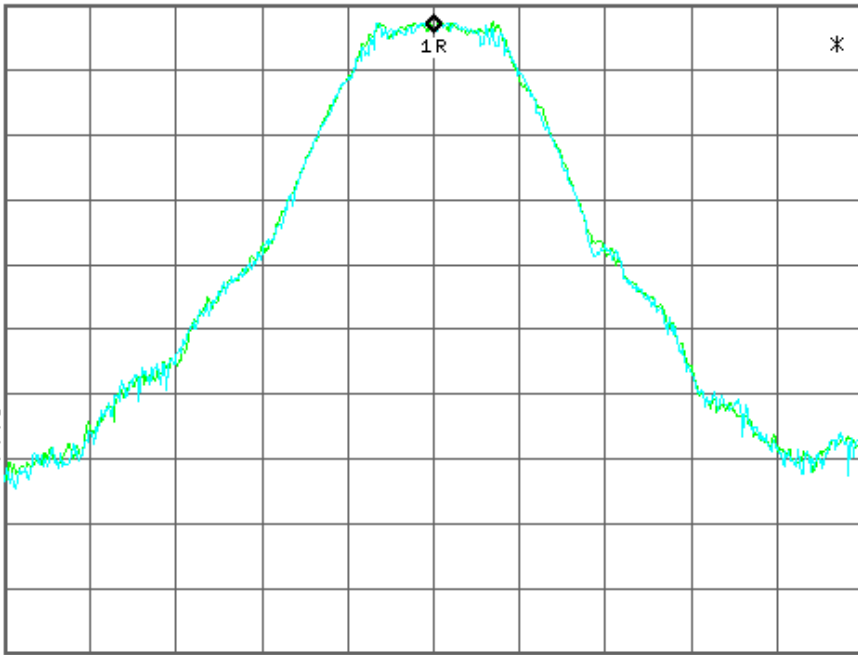

**Center Freq**  
 1.88000000 GHz

**Start Freq**  
 1.87950000 GHz

**Stop Freq**  
 1.88050000 GHz

**CF Step**  
 100.000000 kHz  
 Auto Man

**Freq Offset**  
 0.00000000 Hz

**Signal Track**  
 On Off

Center 1.880 000 GHz Span 1 MHz  
 #Res BW 30 kHz #VBW 30 kHz #Sweep 4.24 ms (601 pts)

EDGE1900

Agilent

R T

**Ch Freq** 1.8502 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSWDM3510 0BW Ch.512 EDGE  
Ref 26 dBm Atten 30 dB

Center 1.850 200 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
242.2195 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		-192.310 Hz
<b>x dB Bandwidth</b>		298.795 kHz

**Freq/Channel**

**Center Freq**  
1.85020000 GHz

**Start Freq**  
1.84970000 GHz

**Stop Freq**  
1.85070000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

**Ch Freq** 1.88 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSWDM3510 0BW Ch.661 EDGE  
Ref 26 dBm Atten 30 dB

Center 1.880 000 GHz Span 1 MHz  
#Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
242.4357 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>		-1.764 kHz
<b>x dB Bandwidth</b>		300.239 kHz

**Freq/Channel**

**Center Freq**  
1.88000000 GHz

**Start Freq**  
1.87950000 GHz

**Stop Freq**  
1.88050000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz


**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved

**Ch Freq** 1.9098 GHz **Trig** Free

Occupied Bandwidth

FCC ID:A3LSWDM3510 0BW Ch.810 EDGE  
 Ref 26 dBm Atten 30 dB

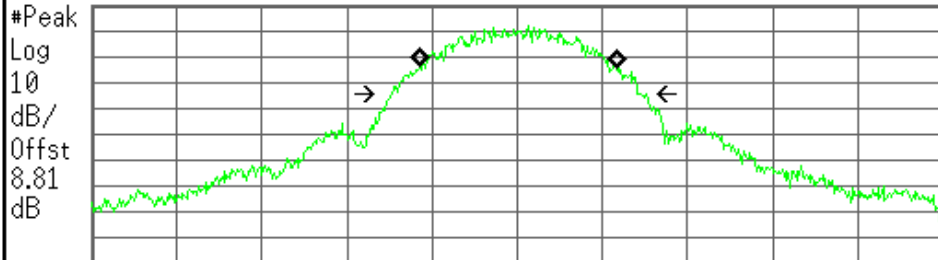

Center 1.909 800 GHz Span 1 MHz  
 #Res BW 3 kHz #VBW 3 kHz #Sweep 1 s (601 pts)

<b>Occupied Bandwidth</b>	<b>Occ BW % Pwr</b>	99.00 %
235.9944 kHz	<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	871.454 Hz	
<b>x dB Bandwidth</b>	293.076 kHz	

**Freq/Channel**

**Center Freq**  
1.90980000 GHz

**Start Freq**  
1.90930000 GHz

**Stop Freq**  
1.91030000 GHz

**CF Step**  
100.000000 kHz  
Auto Man

**Freq Offset**  
0.00000000 Hz

**Signal Track**  
On Off

File Operation Status, C:\TEMP.GIF file saved

ID : A3LSWDM3510 Transmit Power 512CH EDGE

Measurement/Instrument Screen									
Control		EGPRS Transmit Power						PDCH Parms	
EGPRS Transmit Power Setup		EPK Burst Power			EPK Est Carrier Power			Downlink Traffic Power	
		Minimum	Maximum	Minimum	Maximum			Traffic Band	
		24.94 dBm	26.30 dBm	25.62 dBm	25.75 dBm			PCS	
		Average	Std Dev	Average	Std Dev			Traffic Channel	
		25.60 dBm	0.26 dBm	25.67 dBm	0.03 dBm			512	
		200 /200		Single				HS TX Level	
								Modulation Coding Scheme	
								Return	
		Active Cell Transferring				Sys Type: EGPRS			
1 of 2		IntRef	Offset	R	T			1 of 2	


Measurement/Instrument Screen															
Control	EGPRS Transmit Power							PDCH Parms							
EGPRS Transmit Power Setup ▾	EPSK Burst Power			EPSK Est Carrier Power				Downlink Traffic Power ▾							
	Minimum	Maximum		Minimum	Maximum			Traffic Band							
	25.02 dBm	26.63 dBm		25.74 dBm	25.86 dBm			PCS							
	Average	Std Dev		Average	Std Dev			Traffic Channel							
25.72 dBm	0.25 dBm		25.78 dBm	0.02 dBm			661								
	200 /200							Single							
	Active Cell Transferring							Sys Type: EGPRS							
								IntRef		Offset	R	T			
1 of 2															1 of 2
	Return														

Measurement/Instrument Screen															
Control	EGPRS Transmit Power							PDCH Parms							
EGPRS Transmit Power Setup ▾	EPSK Burst Power			EPSK Est Carrier Power				Downlink Traffic Power ▾							
	Minimum	Maximum		Minimum	Maximum			Traffic Band							
	25.05 dBm	26.46 dBm		25.83 dBm	25.97 dBm			PCS							
	Average	Std Dev		Average	Std Dev			Traffic Channel							
25.81 dBm	0.26 dBm		25.88 dBm	0.03 dBm			810								
	200 /200							Single							
	Active Cell Transferring							Sys Type: EGPRS							
								IntRef		Offset	R	T			
1 of 2															1 of 2
	Return														

Agilent

R T

Freq/Channel

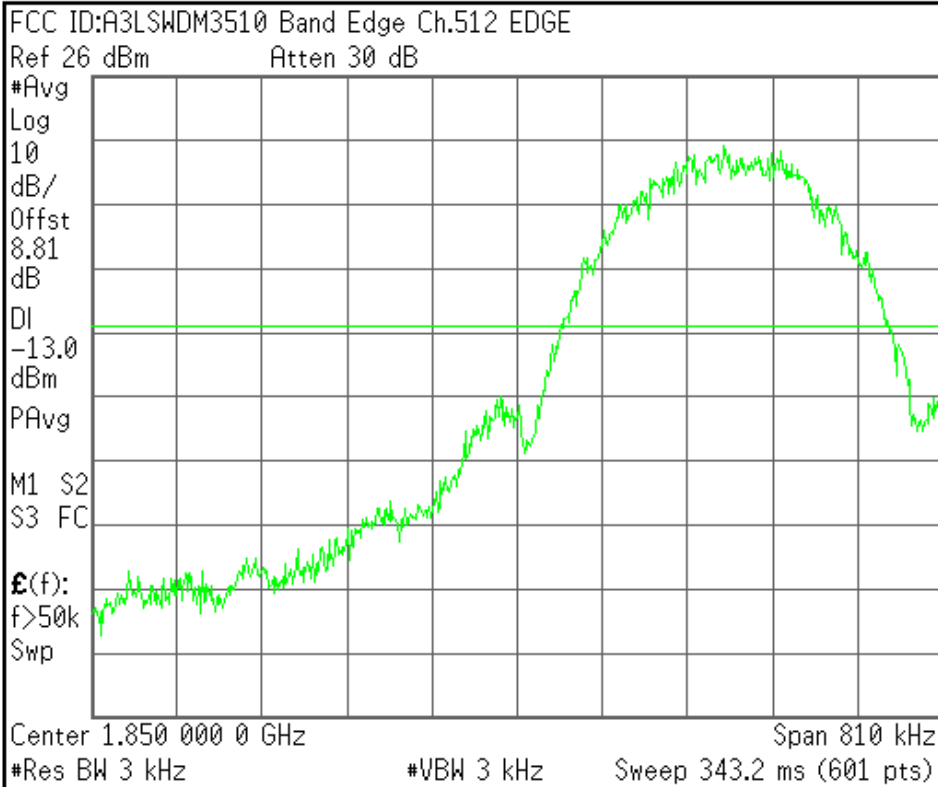


<b>Center Freq</b> 1.85000000 GHz
<b>Start Freq</b> 1.84959500 GHz
<b>Stop Freq</b> 1.85040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

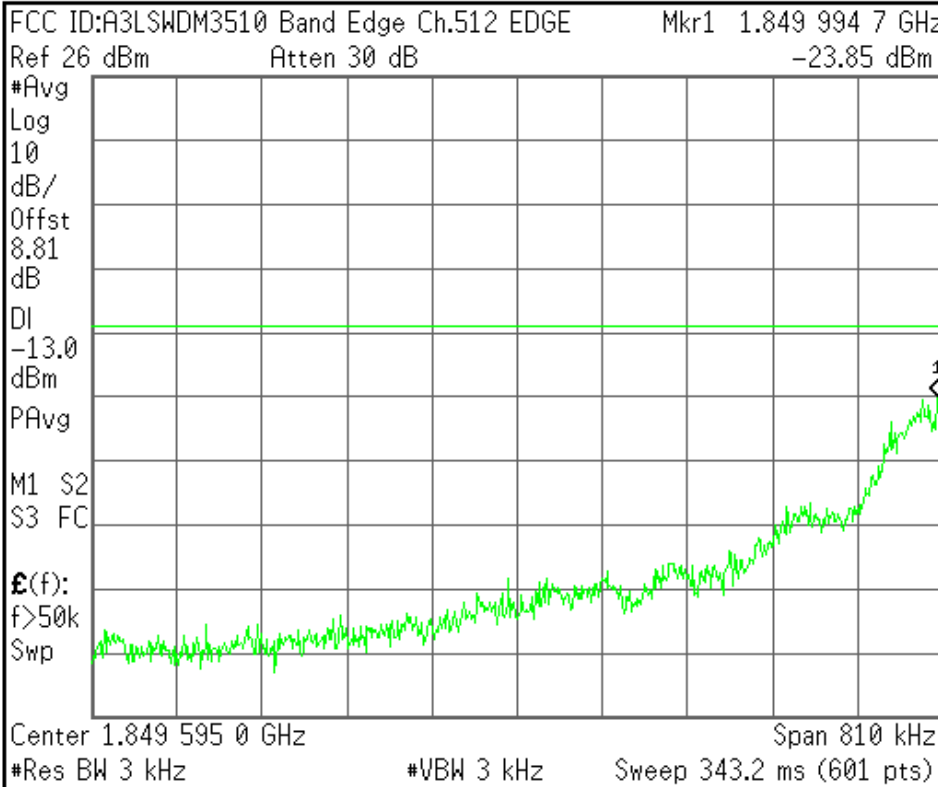


<b>Center Freq</b> 1.84959500 GHz
<b>Start Freq</b> 1.84919000 GHz
<b>Stop Freq</b> 1.85000000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent

R T

Freq/Channel

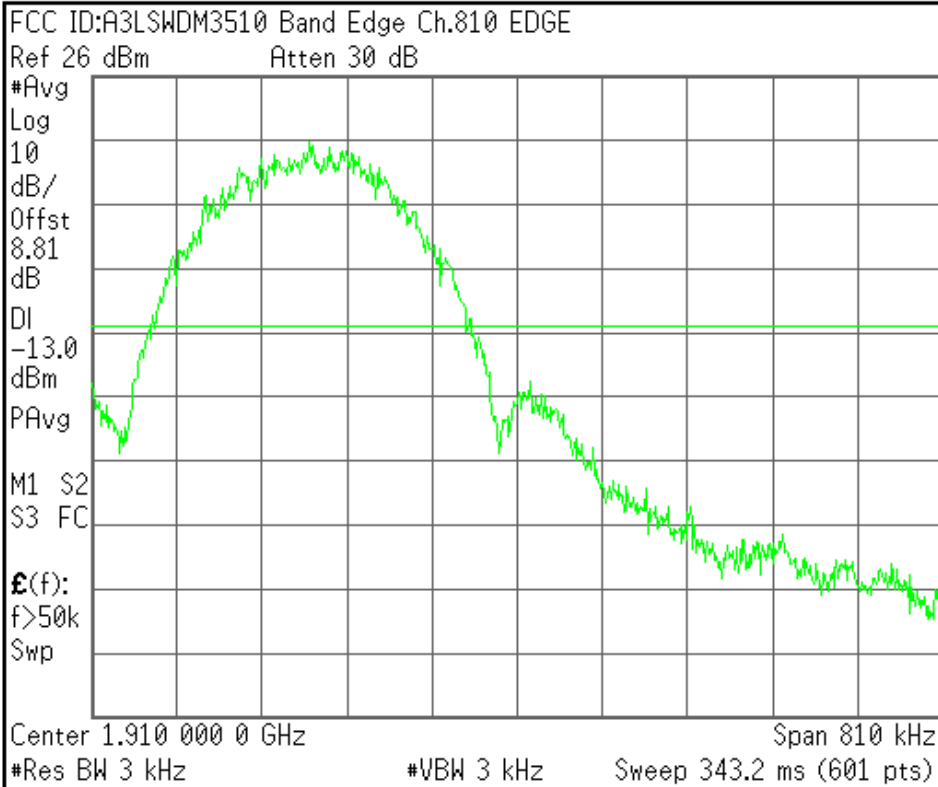


<b>Center Freq</b> 1.91000000 GHz
<b>Start Freq</b> 1.90959500 GHz
<b>Stop Freq</b> 1.91040500 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

Agilent


R T

Freq/Channel

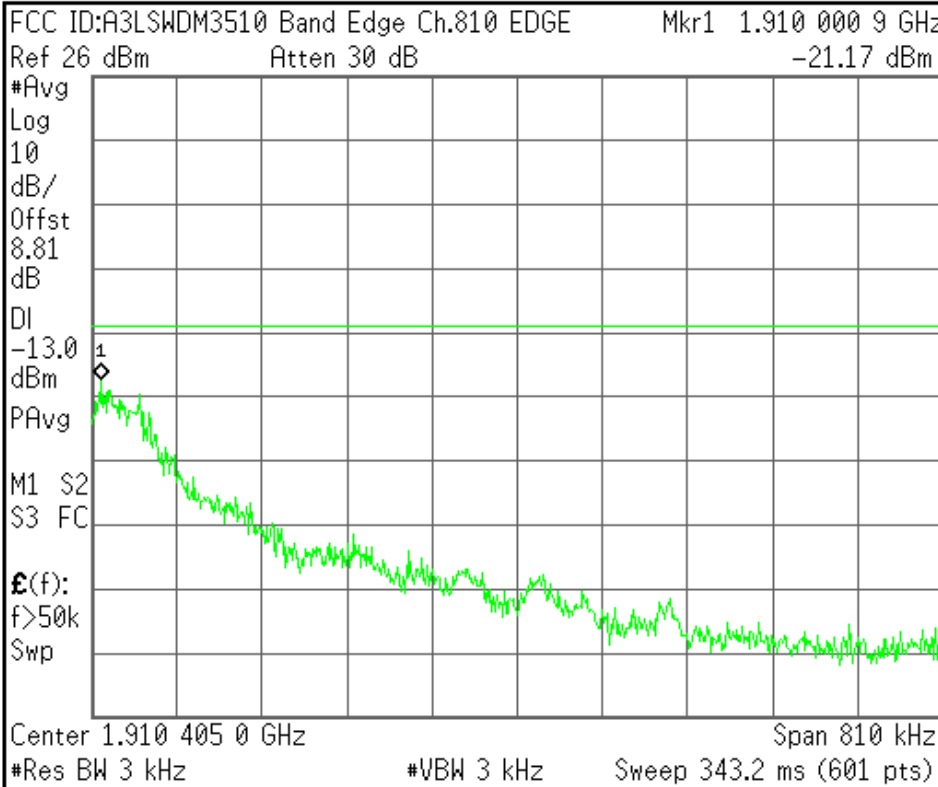

<b>Center Freq</b> 1.91040500 GHz
<b>Start Freq</b> 1.91000000 GHz
<b>Stop Freq</b> 1.91081000 GHz
<b>CF Step</b> 81.0000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

File Operation Status, C:\TEMP.GIF file saved

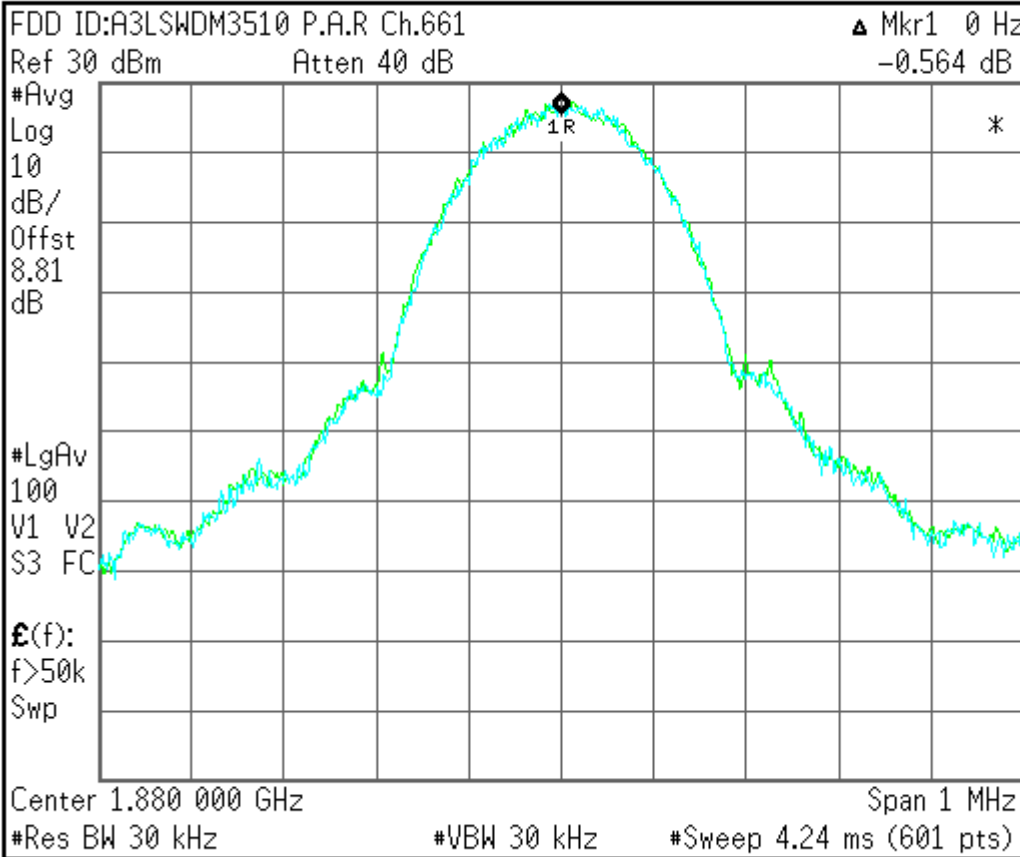

<b>Center Freq</b> 1.88000000 GHz
<b>Start Freq</b> 1.87950000 GHz
<b>Stop Freq</b> 1.88050000 GHz
<b>CF Step</b> 100.000000 kHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2006 Agilent Technologies