



# FCC RADIO TEST REPORT

FCC ID : A4RG8V0U  
Equipment : Phone  
Model Name : G8V0U, GF5KQ  
Applicant : Google LLC  
1600 Amphitheatre Parkway,  
Mountain View, California, 94043 USA  
Standard : FCC 47 CFR Part 2, and 30

The product was received on Jul. 08, 2021 and testing was started from Jul. 08, 2021 and completed on Sep. 14, 2021. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures ANSI C63.26-2015 and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test .....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	7
1.5 Applied Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration .....	9
2.4 Measurement Results Explanation Example .....	10
2.5 Far Field Condition for Frequency above 18GHz.....	11
2.6 Frequency List of Low/Middle/High Channels.....	11
<b>3 Radiated Test Items .....</b>	<b>12</b>
3.1 Measuring Instruments.....	12
3.2 Test Setup .....	12
3.3 Test Result of Radiated Test.....	15
3.4 EIRP Measurement .....	16
3.5 Occupied Bandwidth .....	17
3.6 Radiated Spurious Emission Measurement.....	18
3.7 Frequency Stability Measurement.....	19
<b>4 List of Measuring Equipment.....</b>	<b>20</b>
<b>5 Uncertainty of Evaluation.....</b>	<b>22</b>
<b>Appendix A. Test Results of Conducted and Radiated Test</b>	
<b>Appendix B. R&amp;S Mixer and Horn Antenna Calibration Reports</b>	



### History of this test report

Report No.	Version	Description	Issued Date
FG121931-10	01	Initial issue of report	Sep. 16, 2021
FG121931-10	02	1. Revise summary of test result and measuring equipment list 2. Revise appendix A9 ~ A20	Sep. 30, 2021



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Limit	Result (PASS/FAIL)	Remark
3.4	§2.1046 §30.202	EIRP Measurement	+43dBm	Pass	-
3.5	§2.1049	Occupied Bandwidth	Not Applicable	Reporting only	-
3.6	§2.1053 §30.203	Radiated Spurious Emission	-5dBm/MHz -13dBm/MHz	Pass	-
3.7	§2.1055	Frequency Stability for Temperature & Voltage	Within the band	Pass	-

**Remark:** This is a variant report for 50MHz bandwidth enabled by software. All the test cases were performed on original report which can be referred to Sporton Report Number FG121931-04L.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by:** William Chen

**Report Producer:** Dara Chiu



# 1 General Description

## 1.1 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Phone
Model Name	G8V0U, GF5KQ
FCC ID	A4RG8V0U
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/LTE/5G NR/NFC/ GNSS/WPC/WPT/UWB WLAN 11b/g/n HT20 WLAN 11a/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80/VHT160 WLAN 11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE

EUT Information List	
S/N	Performed Test Item
16011FDEE0005V	Conducted Measurement EIRP Radiated Spurious Emission

**Remark:** The above EUT's information was declared by manufacturer.

## 1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Device Category in Part 30</b>	Mobile station
<b>Tx Frequency</b>	NR band n258: 24.25GHz ~ 24.45GHz (258A) 24.75GHz ~ 25.25GHz (258B) NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz
<b>Rx Frequency</b>	NR band n258: 24.25GHz ~ 24.45GHz (258A) 24.75GHz ~ 25.25GHz (258B) NR band n260: 37GHz ~ 40GHz NR band n261: 27.5GHz ~ 28.35GHz
<b>Support Bandwidth</b>	NR band n258: 50 MHz, 100 MHz (1CC) and 200 MHz (2CC) NR band n260: 50 MHz, 100 MHz (1CC) and 200 MHz (2CC) NR band n261: 50 MHz, 100 MHz (1CC) and 200 MHz (2CC)
<b>Maximum Number of contiguous CC</b>	2
<b>Maximum Aggregated Bandwidth</b>	200MHz
<b>Maximum Output Power (EIRP) (Bandwidth 50MHz)</b>	NR band n258A: <b>Module A: 26.11 dBm</b> Module B: 25.89 dBm NR band n258B: <b>Module A: 26.83 dBm</b> Module B: 26.76 dBm NR band n260: <b>Module A: 30.92 dBm</b> Module B: 29.66 dBm NR band n261: <b>Module A: 31.84 dBm</b> Module B: 31.79 dBm
<b>Type of Modulation</b>	CP-OFDM: QPSK / 16QAM / 64QAM DFT-s-OFDM: pi/2 BPSK / QPSK / 16QAM / 64QAM

Note 1: Highest EIRP was measured on Module A, dual beam case for n258, n260, and n261 band.

Note 2: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory			
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855			
<b>Test Site Information</b>	Site No.	Engineer	Temperature	Humidity
	03CH18-HY	Yu Wang	22~25°C	44~48 %
	03CH19-HY	Yu Wang	23~26°C	44~49 %

Note 1: FCC Designation No.: TW3786

Note 2: The highest accredited frequency is 280GHz and the ISO 17025 accreditation letter can be found on TAF (Taiwan Accreditation Foundation) Website ([Website link](#)).

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 30
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 842590 D01 Upper Microwave Flexible Use Service v01r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

EUT has total 2 millimeter wave antenna modules, Plane A and Plane B, with antenna type patch.

There are up to 2 beams H and V operation for each antenna module.

Any antenna module cannot transmit simultaneously with the other antenna modules.

Preliminary EIRP test was performed for all beam configurations in the anechoic chamber at the manufacturer’s facility so the EIRP worst case beam-pair were identified.

EIRP was investigated that the dual beam rated maximum EIRP is higher than single beam.

The NR radio operation is controlled via AT commands to enter FTM mode (Factory mode).

The EUT is forced to operate continuously (100% duty cycle) with maximum output power during the test.

### 2.1 Test Mode

For radiated measurement, the pre-scan is performed to find the worst cases EUT position.


Test Items	Band	Bandwidth (MHz)	Modulation			RB #			Test Channel		
		50	QPSK	16QAM	64QAM	1	Inner Full	Outer Full	L	M	H
EIRP	n258 n260 n261	v	v	v	v	v	v	v	v	v	v
99% Occupied Bandwidth	n258 n260 n261	v	v	v	v	-	-	v	v	v	v
Out of Band Emission	n258 n260 n261	v	v	v	v	v	-	v	v	-	v
Spurious Emission	n258 n260 n261	v	v	-	-	v	-	-	v	v	v
Frequency Stability	n258 n260 n261	CW tone							-	v	-
Remark	<ol style="list-style-type: none"> <li>The mark "v " means that this configuration is chosen for testing.</li> <li>The device is investigated from 9kHz to 200GHz of fundamental signal for radiated spurious emission test under different RB size and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>Both modulation type DFT-s OFDM and CP-OFDM are evaluated and reported.</li> <li>All the radiated test cases were performed with built-in battery.</li> <li>The out of band emission were measured radiated EIRP. The TRP method is applied when EIRP exceeds limit.</li> </ol>										

Note: EUT antenna gain information is not listed because all the measured results are radiated EIRP or TRP.




## 2.2 Connection Diagram of Test System

<For radiated emissions from 30MHz to 18GHz>

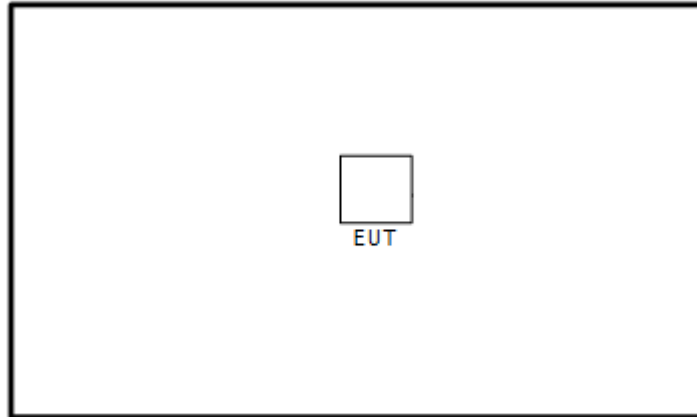

<For radiated emissions from 18GHz ~ 200GHz>

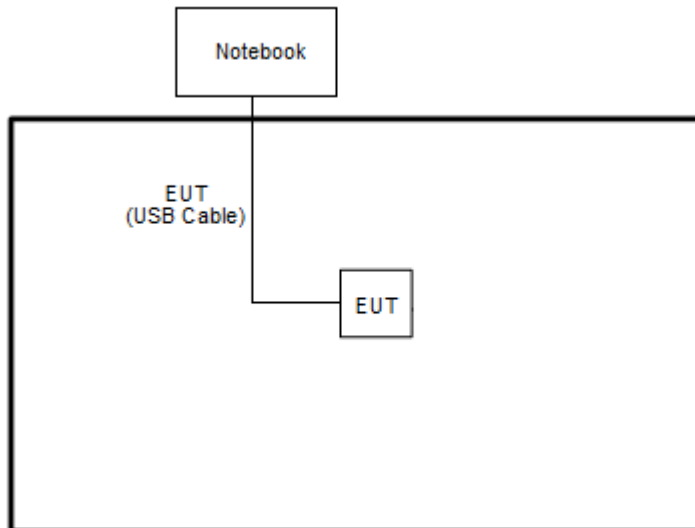

## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

**Remark:** Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.



## 2.4 Measurement Results Explanation Example

According to ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = E(\text{dBuV/m}) + 20\log(D) - 104.8.$$

- where D is the measurement distance (in the far field region) in m.
- $E(\text{dBuV/m}) = \text{Spectrum Reading Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$

Hence, the spectrum analyzer *Offset* is derived including RF cable loss and antenna factor.

$$\text{Offset} = \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$

The conversion loss of RF mixer is also included by the mixer table of spectrum analyzer when measurement frequency is above 40GHz.

Example :

$$\begin{aligned} \text{Offset} &= \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8 \\ &= 42.3 + 3.0 + 107 + 20\log(1) - 104.8 \\ &= 47.5 \text{ (dB)} \end{aligned}$$



### 2.5 Far Field Condition for Frequency above 18GHz

Horn Antenna	Frequency (GHz)	Antenna Dimension A (mm)	Wavelength (λ) (m)	Far field R (m) $\geq 2A^2 / \lambda$	Measurement Distance (D) (m)	Distance Factor $20\log(D)$ (dB)
BBHA 9170	18	60	0.0167	0.43	1	0.00
	40	60	0.0075	0.96		
QWH-UPRR00	40	48	0.0075	0.61	1	0.00
	60	48	0.0050	0.92		
QWH-EPRR00	60	31	0.0050	0.38	1	0.00
	90	31	0.0033	0.58		
QWH-FPRR00	90	21	0.0033	0.26	1	0.00
	140	21	0.0021	0.41		
QWH-GPRR00	140	15	0.0021	0.21	0.5	-6.02
	220	15	0.0014	0.33		

### 2.6 Frequency List of Low/Middle/High Channels

NR Band n258A (24.25-25.45GHz) Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	24275	24350	24425

NR Band n258B (24.75-25.25GHz) Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	24775	25000	25225

NR Band n260 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	37025	38500	39975

NR Band n261 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Frequency	27525	27925	28325


### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


For radiated emissions from 9kHz to 30MHz

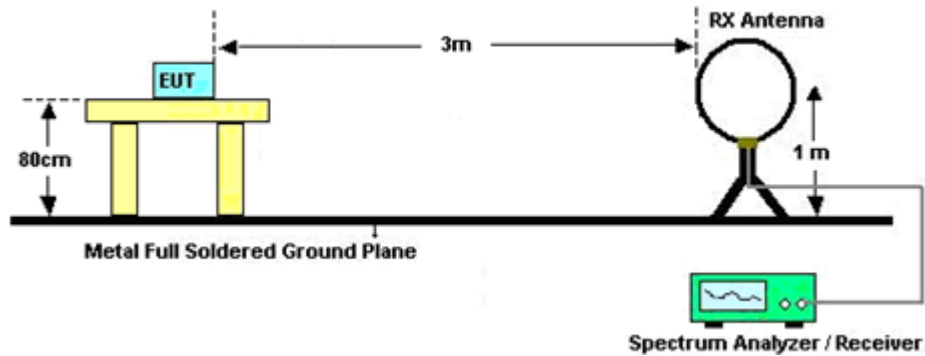


For radiated emissions from 30MHz to 1GHz

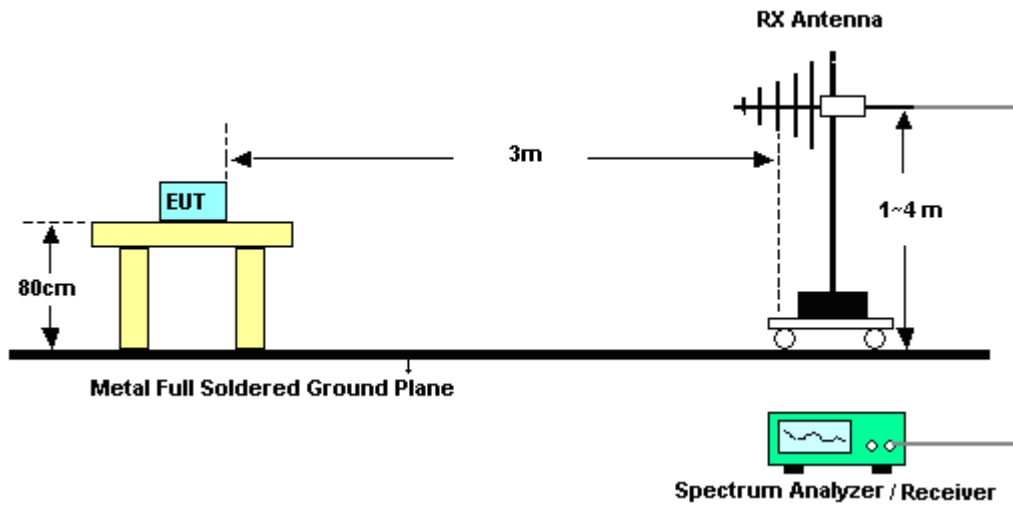


For radiated emissions 1GHz to 18GHz

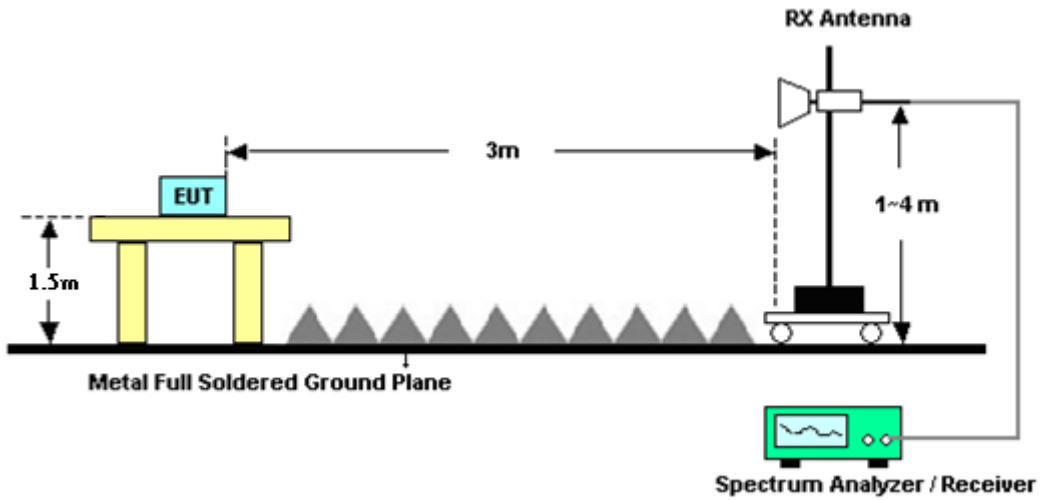


For radiated emissions from 18GHz to 40GHz

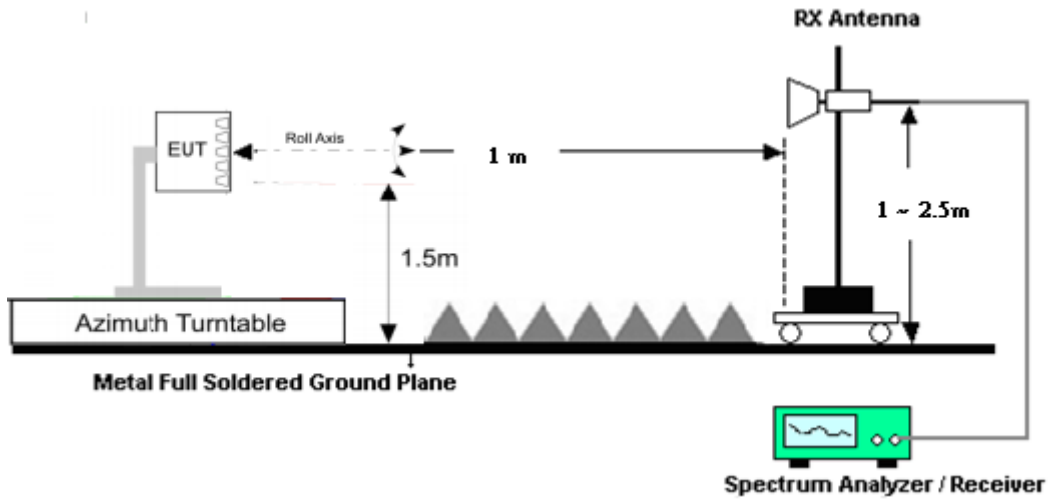


For radiated emissions above 40GHz up to 140GHz

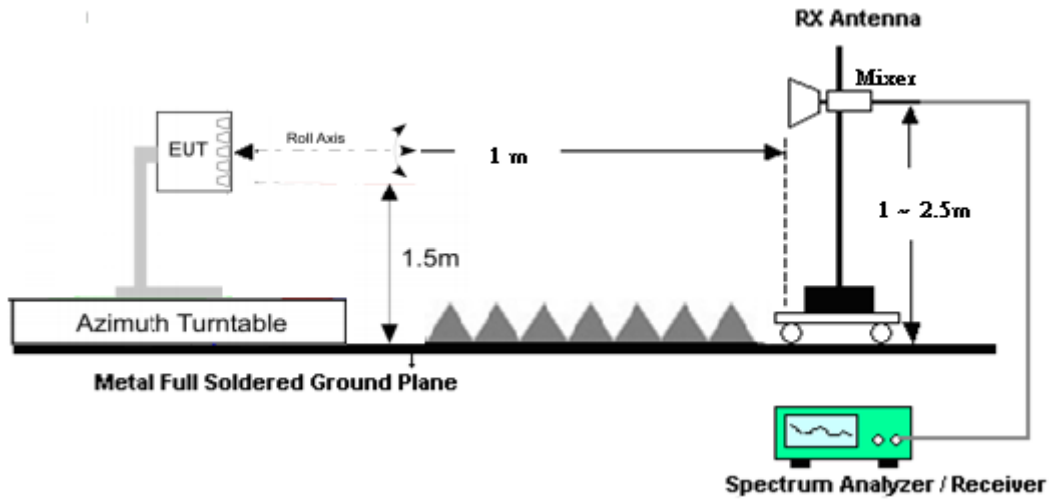

For radiated emissions above 140GHz up to 200GHz

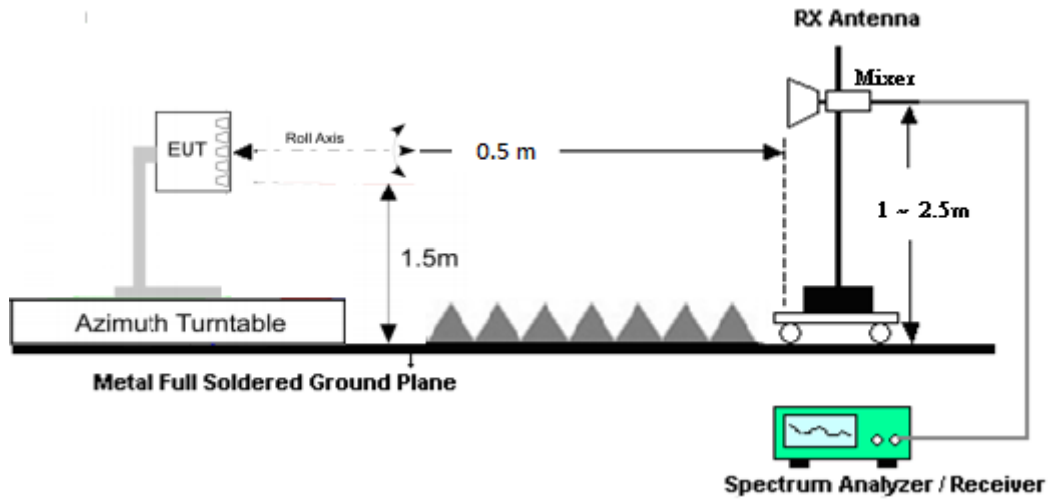

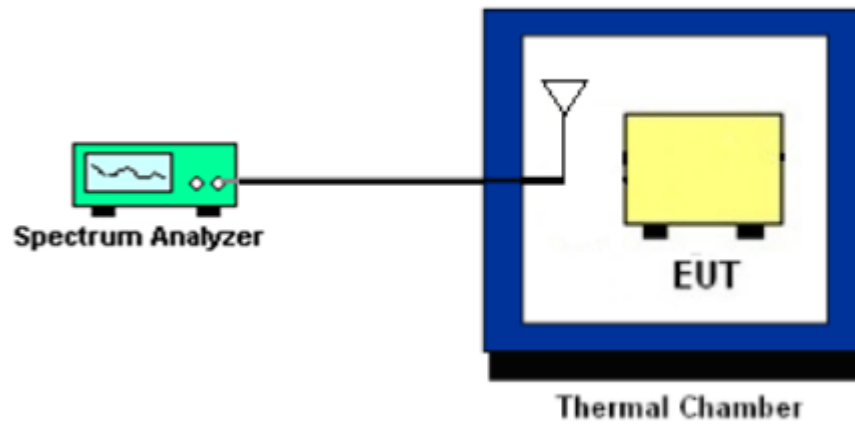**Frequency stability Setup****3.3 Test Result of Radiated Test**

Please refer to Appendix A.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



### 3.4 EIRP Measurement

#### 3.4.1 Description of EIRP Measurement

For mobile stations, the average power of the sum of all antenna elements is limited to a maximum EIRP of +43 dBm.

#### 3.4.2 Test Procedures

1. Set EUT at maximum output power.
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Enable channel power function of spectrum analyzer
4. Set frequency would like to be investigated.
5. Set Detector = RMS
6. Set Trace mode = trace average
7. Set Sweep time = auto couple
8. Set sweep points  $\geq 2 \times \text{Span/RBW}$
9. Set sweep count 100 and wait until the trace to be stabilized
10. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
11. Measure and record the power level from the spectrum analyzer.
12. The test result is calculated according to

ANSI C63.26-2015 Section 5.2.7

$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$

where D is the measurement distance (in the far field region) in m.

$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$

That is, set the spectrum offset including sum of

$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$





## **3.5 Occupied Bandwidth**

### **3.5.1 Description of Occupied Bandwidth Measurement**

This is for reporting only.

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

### **3.5.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.4.4

1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be at least 1.5 times the anticipated OBW.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.6 Radiated Spurious Emission Measurement

### 3.6.1 Description of Radiated Spurious Emission Measurement

The spectrum is scanned from 30 MHz up to 200GHz.

The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be  $-13$  dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be  $-5$  dBm/MHz or lower.

### 3.6.2 Test Procedures

1. Set EUT at maximum output power..
2. Select lowest, middle, and highest channels for each band and different modulation.
3. Measure and record the power level from the spectrum analyzer.
4. Set frequency would like to be investigated.
5. Set Detector = RMS, Trace mode = trace average, sweep time = auto couple
6. Set sweep points  $\geq 2 \times \text{Span}/\text{RBW}$ , sweep count 100 and wait until the trace to be stabilized.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. For measurement frequency from 30MHz to 18GHz,  
An antenna was substituted in place of the EUT and was driven by a signal generator.  
Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. Take record of output power and repeat for another polarization.
9. For measurement frequency above 18GHz, the test result is calculated according to ANSI C63.26-2015 Section 5.2.7 and 5.7.3 and 5.7.4  
$$\text{EIRP (dBm)} = \text{E(dBuV/m)} + 20\log(D) - 104.8.$$
where D is the measurement distance (in the far field region) in m.  
$$\text{E (dBuV/m)} = \text{Spectrum Level (dBm)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107$$
That is, set the spectrum offset including sum of  
$$\text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} + 107 + 20\log(D) - 104.8$$
10. The conversion loss of RF mixer is also included in conversion loss table of the spectrum analyzer when measurement frequency is above 40GHz.
11. The TRP method refers to the clause 4.4.2.2 of FCC KDB 842590 D01 v01r02.  
If EIRP measurement results exceed the emission limit, then TRP measurement will be used as an alternative method. Test results of TRP measurement are marked as "TRP Measurement".



## **3.7 Frequency Stability Measurement**

### **3.7.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

### **3.7.2 Test Procedures for Temperature Variation**

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was set up in the thermal chamber.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **3.7.3 Test Procedures for Voltage Variation**

The testing follows FCC KDB 971168 D01 v03r01 Section 9.

1. The EUT was placed in a temperature chamber at 20° C.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 21, 2020	Aug. 09, 2021~ Sep. 14, 2021	Oct. 20, 2021	Radiation (03CH19-HY)
Preamplifier	COM-POWER	PAM-103	18020199	1MHz~1000MHz	Jan. 04, 2021	Aug. 09, 2021~ Sep. 14, 2021	Jan. 03, 2022	Radiation (03CH19-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9kHz~30MHz	Jan. 04, 2021	Aug. 09, 2021~ Sep. 14, 2021	Jan. 03, 2022	Radiation (03CH19-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	55608 & 09	30MHz~1GHz	Oct. 22, 2020	Aug. 09, 2021~ Sep. 14, 2021	Oct. 21, 2021	Radiation (03CH19-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Nov. 03, 2020	Aug. 09, 2021~ Sep. 14, 2021	Nov. 02, 2021	Radiation (03CH19-HY)
Amplifier	EMCI	EMC118A45S E	980791	1GHz-18GHz	Nov. 16, 2020	Aug. 09, 2021~ Sep. 14, 2021	Nov. 15, 2021	Radiation (03CH19-HY)
EMI Test Receiver	Keysight	N9038A	MY59053012	N/A	Nov. 18, 2020	Aug. 09, 2021~ Sep. 14, 2021	Nov. 17, 2021	Radiation (03CH19-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Aug. 09, 2021~ Sep. 14, 2021	N/A	Radiation (03CH19-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Aug. 09, 2021~ Sep. 14, 2021	N/A	Radiation (03CH19-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Aug. 09, 2021~ Sep. 14, 2021	N/A	Radiation (03CH19-HY)
Software	Audix	E3 6.2009-8-24	RK-002155	N/A	N/A	Aug. 09, 2021~ Sep. 14, 2021	N/A	Radiation (03CH19-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519226/2,804 014/2,804026 /2	30MHz~40GHz	Jan. 20, 2021	Aug. 09, 2021~ Sep. 14, 2021	Jan. 19, 2022	Radiation (03CH19-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz~40GHz	Dec. 11, 2020	Jul. 08, 2021~ Sep. 14, 2021	Dec. 10, 2021	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV3044	101010	10Hz~44GHz	Nov. 25, 2020	Jul. 08, 2021~ Sep. 14, 2021	Nov. 24, 2021	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	9kHz~40GHz	Dec. 22, 2020	Jul. 08, 2021~ Sep. 14, 2021	Dec. 21, 2021	Radiation (03CH18-HY)
Software	Sporton	TRP Tool v1	N/A	N/A	N/A	Jul. 08, 2021~ Sep. 14, 2021	N/A	Radiation (03CH18-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Nov. 10, 2020	Jul. 08, 2021~ Sep. 14, 2021	Nov. 09, 2021	Radiation (03CH18-HY)
Turn Table	EMEC	N/A	N/A	Phi/Theta 0~360 Degree	N/A	Jul. 08, 2021~ Sep. 14, 2021	N/A	Radiation (03CH18-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table	N/A	Jul. 08, 2021~ Sep. 14, 2021	N/A	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	FS-Z60	101033	40 ~ 60 GHz	Mar. 17, 2020	Sep. 07, 2021	Mar. 16, 2023	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	FS-Z90	101867	60 ~ 90 GHz	Jan. 10, 2019	Sep. 07, 2021	Jan. 09, 2022	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	FS-Z140	101128	90 ~ 140 GHz	Oct. 26, 2020	Sep. 07, 2021	Oct. 25, 2023	Radiation (03CH18-HY)
*Mixer	Rohde & Schwarz	FS-Z220	101008	140 ~ 220 GHz	Apr. 04, 2019	Sep. 07, 2021	Apr. 03, 2022	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-UPRR00	923600007	40 ~ 60 GHz	Aug. 17, 2018	Sep. 07, 2021	N/A (Note 3)	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-EPRR00	784600034	60 ~ 90 GHz	Aug. 17, 2018	Sep. 07, 2021	N/A (Note 3)	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-FPRR00	923800008	90 ~ 140 GHz	Aug. 17, 2018	Sep. 07, 2021	N/A (Note 3)	Radiation (03CH18-HY)
Standard Horn Antenna	Quinstar	QWH-GPRR00	923900001	140 ~ 220 GHz	Aug. 17, 2018	Sep. 07, 2021	N/A (Note 3)	Radiation (03CH18-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	EMEC	EM 1000	N/A	Control 3D positioner	N/A	Jul. 08, 2021~ Sep. 14, 2021	N/A	Radiation (03CH18-HY)
3D positioner	EMEC	N/A	N/A	Theta/Phi	N/A	Jul. 08, 2021~ Sep. 14, 2021	N/A	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801607/2	9kHz~40GHz	Dec. 22, 2020	Jul. 08, 2021~ Sep. 14, 2021	Dec. 21, 2021	Radiation (03CH18-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801589/2	9kHz~40GHz	Dec. 22, 2020	Jul. 08, 2021~ Sep. 14, 2021	Dec. 21, 2021	Radiation (03CH18-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV30	103738	9kHz to 30GHz	May 19, 2021	Jul. 08, 2021~ Sep. 14, 2021	May 18, 2022	Radiation (03CH18-HY)

**Note 1:** (\*) Equipment manufacturer's Calibration Certificate.

**Note 2:** The Standard Gain Horn Antennas are calibrated by the ISO 17025 accredited test lab MWM Lab (<http://en.mwmlab.com/about>), a sub unit of Belarussian State University of Informatics and Radio electronics which is accredited by the Belarussian State Centre for Accreditation (BSCA). BSCA is the National accreditation body of the Republic of Belarus and an associated member of the International Laboratory Accreditation Cooperation (ILAC).

**Note 3:** The standard gain horn's critical dimensions is verified on an annual basis within the equipment specification according to KDB 842590 D01 v01r02 clause 2)a)2)iii).



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.62
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.62
---	------

### Uncertainty of Radiated Emission Measurement (40 GHz ~ 140 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.92
---	------

### Uncertainty of Radiated Emission Measurement (140 GHz ~ 200 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.78
---	------



# Appendix A. Test Results of Conducted and Radiated Test

## EIRP Power(Average power)

### Module A

NR Band n258A Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	22.45	22.68
	50	DFT-S	16QAM	20.16	19.77
	50	DFT-S	64QAM	17.43	17.38
	50	CP	QPSK	18.67	19.20
NR Band n258A Module A H (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	24.34	24.67
	50	DFT-S	16QAM	21.92	21.69
	50	DFT-S	64QAM	19.33	19.36
	50	CP	QPSK	20.62	21.27
NR Band n258A Module A H (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	24.82	24.97
	50	DFT-S	16QAM	22.35	22.01
	50	DFT-S	64QAM	19.84	19.89
	50	CP	QPSK	20.89	21.61




NR Band n258A Module A V (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	24.38	24.44
	50	DFT-S	16QAM	20.72	21.32
	50	DFT-S	64QAM	19.46	19.35
	50	CP	QPSK	20.92	20.99
NR Band n258A Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	25.11	25.18
	50	DFT-S	16QAM	21.34	21.94
	50	DFT-S	64QAM	19.92	20.13
	50	CP	QPSK	22.44	21.94
NR Band n258A Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	24.61	24.61
	50	DFT-S	16QAM	20.89	21.52
	50	DFT-S	64QAM	19.27	19.42
	50	CP	QPSK	21.73	21.32





NR Band n258A Module A H+V (Beam ID: 4+4)					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	QPSK	25.33	25.25
	50	DFT-S	16QAM	21.97	22.09
	50	DFT-S	64QAM	20.28	20.17
	50	CP	QPSK	22.02	21.71
NR Band n258A Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	QPSK	25.90	26.11
	50	DFT-S	16QAM	22.65	22.88
	50	DFT-S	64QAM	20.96	21.12
	50	CP	QPSK	22.60	22.64
NR Band n258A Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	QPSK	25.53	25.55
	50	DFT-S	16QAM	22.07	22.39
	50	DFT-S	64QAM	20.40	20.41
	50	CP	QPSK	22.11	22.07

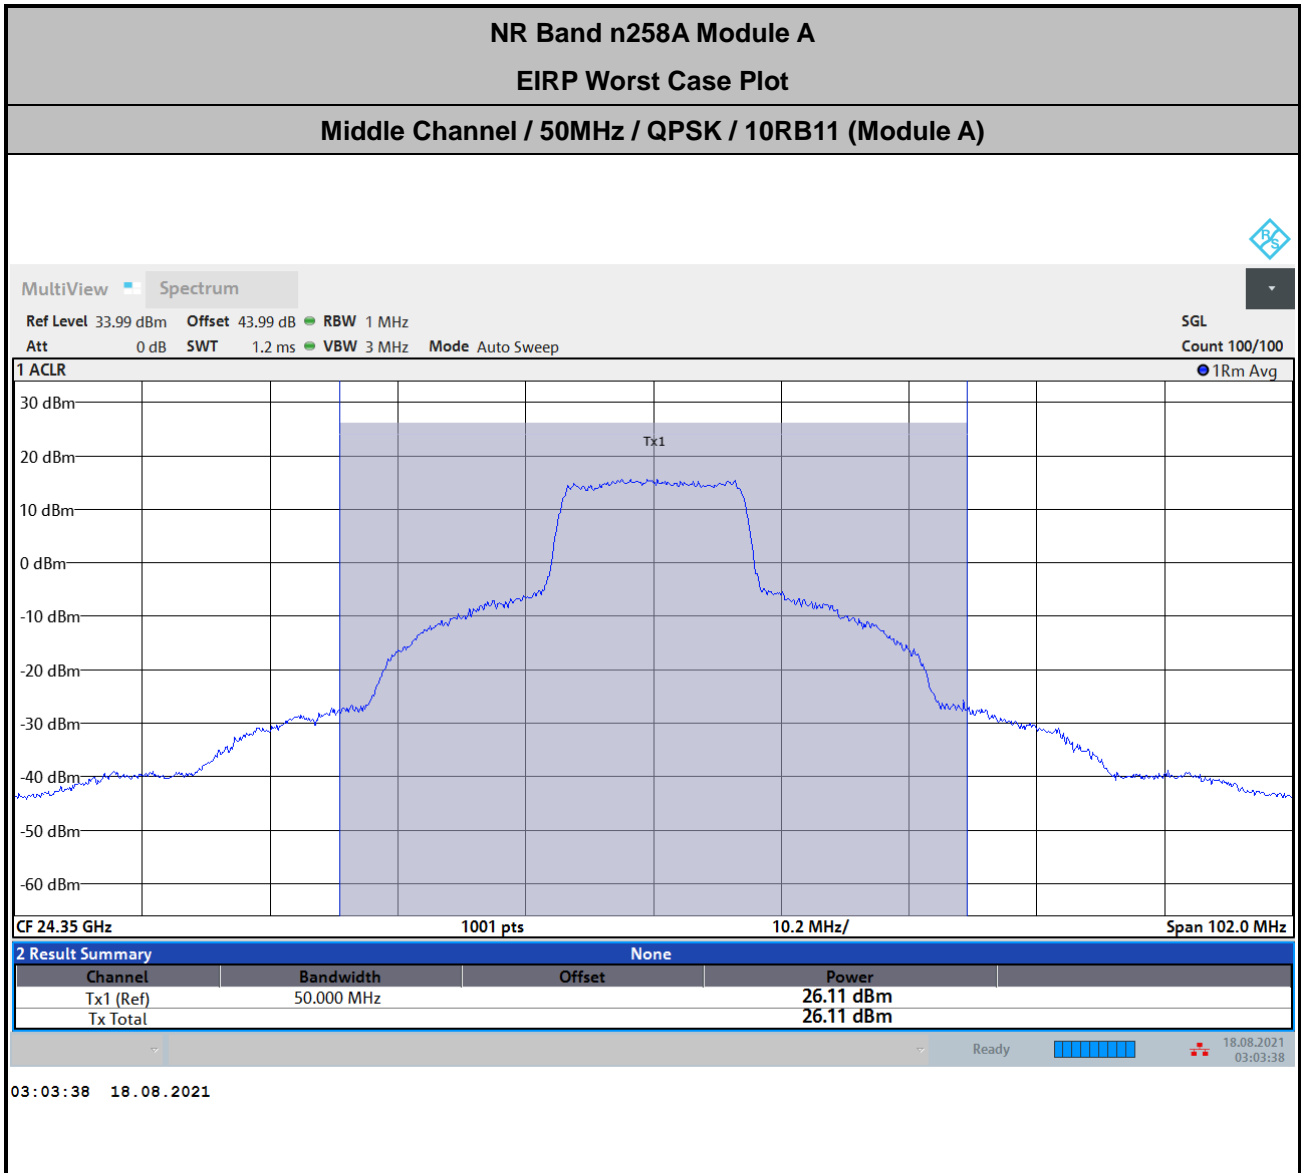

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.2 + 2.59 + 107 + 20log(1) – 104.8 = 43.99 (dB)



Module B


NR Band n258A Module B H (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	21.99	22.03
	50	DFT-S	16QAM	19.48	19.21
	50	DFT-S	64QAM	17.17	16.84
	50	CP	QPSK	18.23	18.71
NR Band n258A Module B H (Beam ID: 5)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	24.54	24.74
	50	DFT-S	16QAM	22.22	21.81
	50	DFT-S	64QAM	19.58	19.55
	50	CP	QPSK	21.00	21.39
NR Band n258A Module B H (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	22.90	23.16
	50	DFT-S	16QAM	20.57	20.37
	50	DFT-S	64QAM	17.99	17.94
	50	CP	QPSK	19.10	19.74



NR Band n258A Module B V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	50	DFT-S	QPSK	24.18	24.19
	50	DFT-S	16QAM	20.28	20.94
	50	DFT-S	64QAM	18.96	19.06
	50	CP	QPSK	21.17	20.75
NR Band n258A Module B V (Beam ID: 5)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	50	DFT-S	QPSK	24.05	24.07
	50	DFT-S	16QAM	19.91	20.79
	50	DFT-S	64QAM	18.72	18.84
	50	CP	QPSK	20.92	20.68
NR Band n258A Module B V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	50	DFT-S	QPSK	23.17	23.27
	50	DFT-S	16QAM	19.52	20.11
	50	DFT-S	64QAM	18.01	18.15
	50	CP	QPSK	20.58	19.94



NR Band n258A Module B H+V (Beam ID: 2+2)					
Maximum Average EIRP [dBm]					
Lowest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	QPSK	25.61	25.52
	50	DFT-S	16QAM	21.51	22.16
	50	DFT-S	64QAM	20.39	20.13
	50	CP	QPSK	22.18	21.79
NR Band n258A Module B H+V (Beam ID: 5+5)					
Maximum Average EIRP [dBm]					
Middle	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	QPSK	25.70	25.89
	50	DFT-S	16QAM	22.55	22.74
	50	DFT-S	64QAM	20.57	20.88
	50	CP	QPSK	22.30	22.41
NR Band n258A Module B H+V (Beam ID: 2+2)					
Maximum Average EIRP [dBm]					
Highest	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
	50	DFT-S	QPSK	25.23	25.49
	50	DFT-S	16QAM	21.96	22.30
	50	DFT-S	64QAM	20.33	20.41
	50	CP	QPSK	22.21	22.09

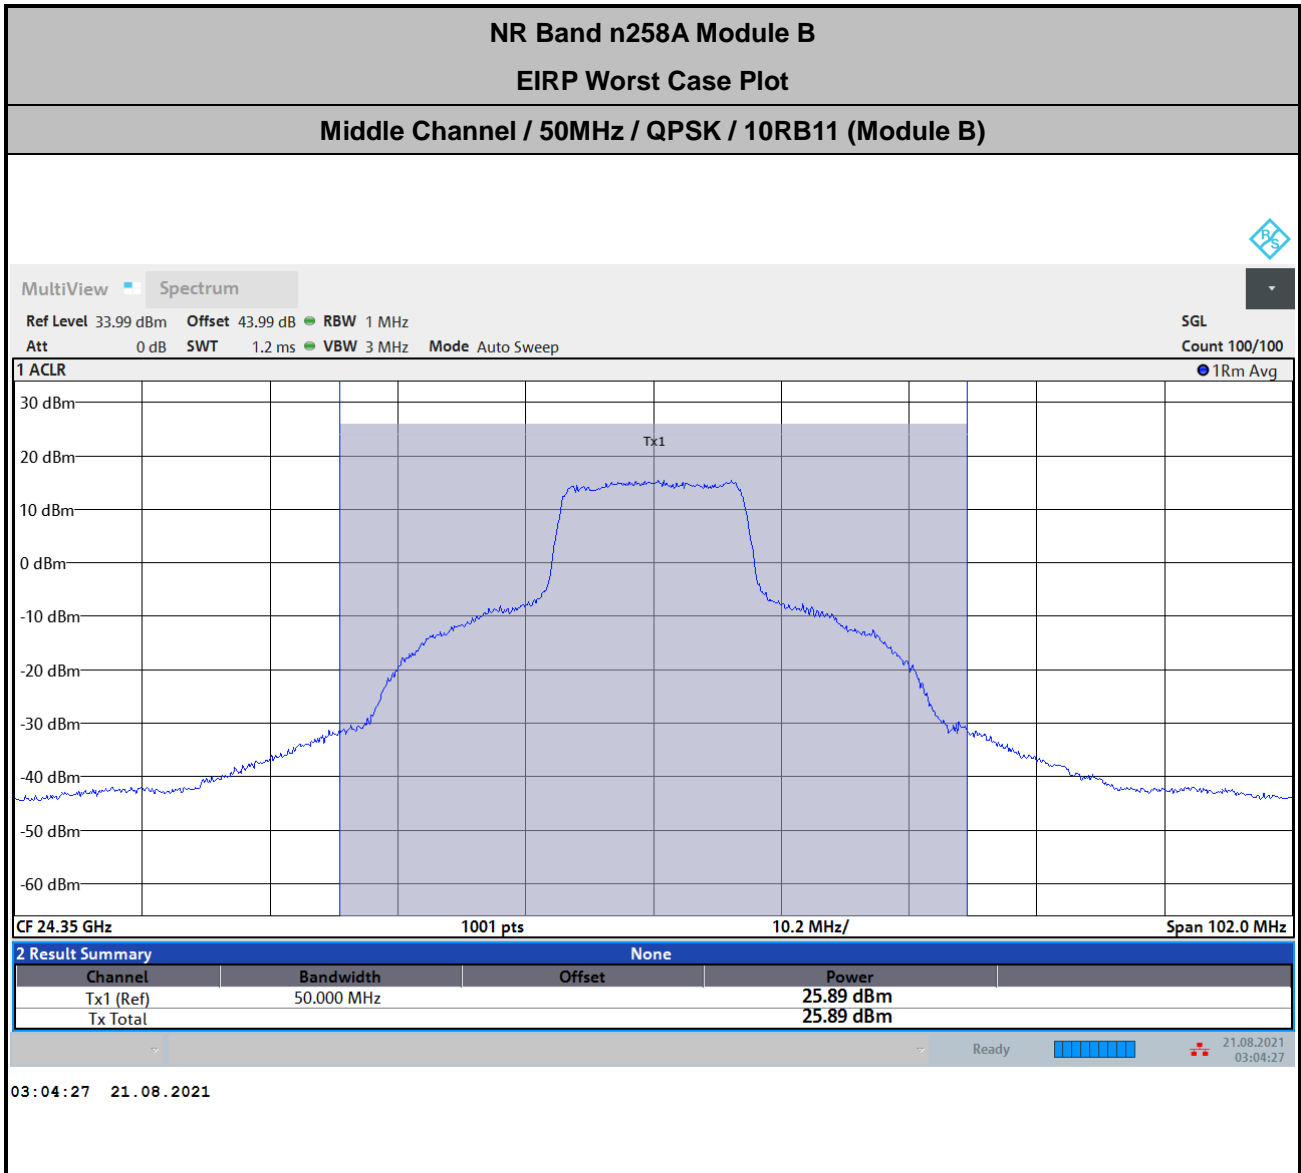

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.2 + 2.59 + 107 + 20log(1) – 104.8 = 43.99 (dB)



Module A

NR Band n258B Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	100	DFT-S	QPSK	22.50	22.68
	100	DFT-S	16QAM	20.05	19.52
	100	DFT-S	64QAM	17.55	17.44
	100	CP	QPSK	18.63	19.19
NR Band n258B Module A H (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	100	DFT-S	QPSK	24.14	24.17
	100	DFT-S	16QAM	21.46	21.21
	100	DFT-S	64QAM	19.18	19.09
	100	CP	QPSK	20.05	20.81
NR Band n258B Module A H (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	100	DFT-S	QPSK	23.64	24.16
	100	DFT-S	16QAM	21.29	21.05
	100	DFT-S	64QAM	18.68	18.81
	100	CP	QPSK	19.94	20.69




NR Band n258B Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	100	DFT-S	QPSK	24.41	24.13
	100	DFT-S	16QAM	22.05	21.56
	100	DFT-S	64QAM	19.56	19.06
	100	CP	QPSK	21.04	20.96
NR Band n258B Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	100	DFT-S	QPSK	24.99	25.04
	100	DFT-S	16QAM	21.07	21.82
	100	DFT-S	64QAM	19.53	19.78
	100	CP	QPSK	21.48	21.67
NR Band n258B Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	100	DFT-S	QPSK	23.85	24.24
	100	DFT-S	16QAM	20.03	20.97
	100	DFT-S	64QAM	18.75	19.01
	100	CP	QPSK	20.72	20.65





NR Band n258B Module A H+V (Beam ID: 4+4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	100	DFT-S	QPSK	25.55	25.60
	100	DFT-S	16QAM	21.70	22.37
	100	DFT-S	64QAM	20.27	20.21
	100	CP	QPSK	22.26	22.15
NR Band n258B Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	100	DFT-S	QPSK	26.83	26.81
	100	DFT-S	16QAM	23.27	23.75
	100	DFT-S	64QAM	21.46	21.69
	100	CP	QPSK	23.02	23.32
NR Band n258B Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	100	DFT-S	QPSK	26.44	26.74
	100	DFT-S	16QAM	23.18	23.63
	100	DFT-S	64QAM	21.21	21.56
	100	CP	QPSK	22.96	23.13

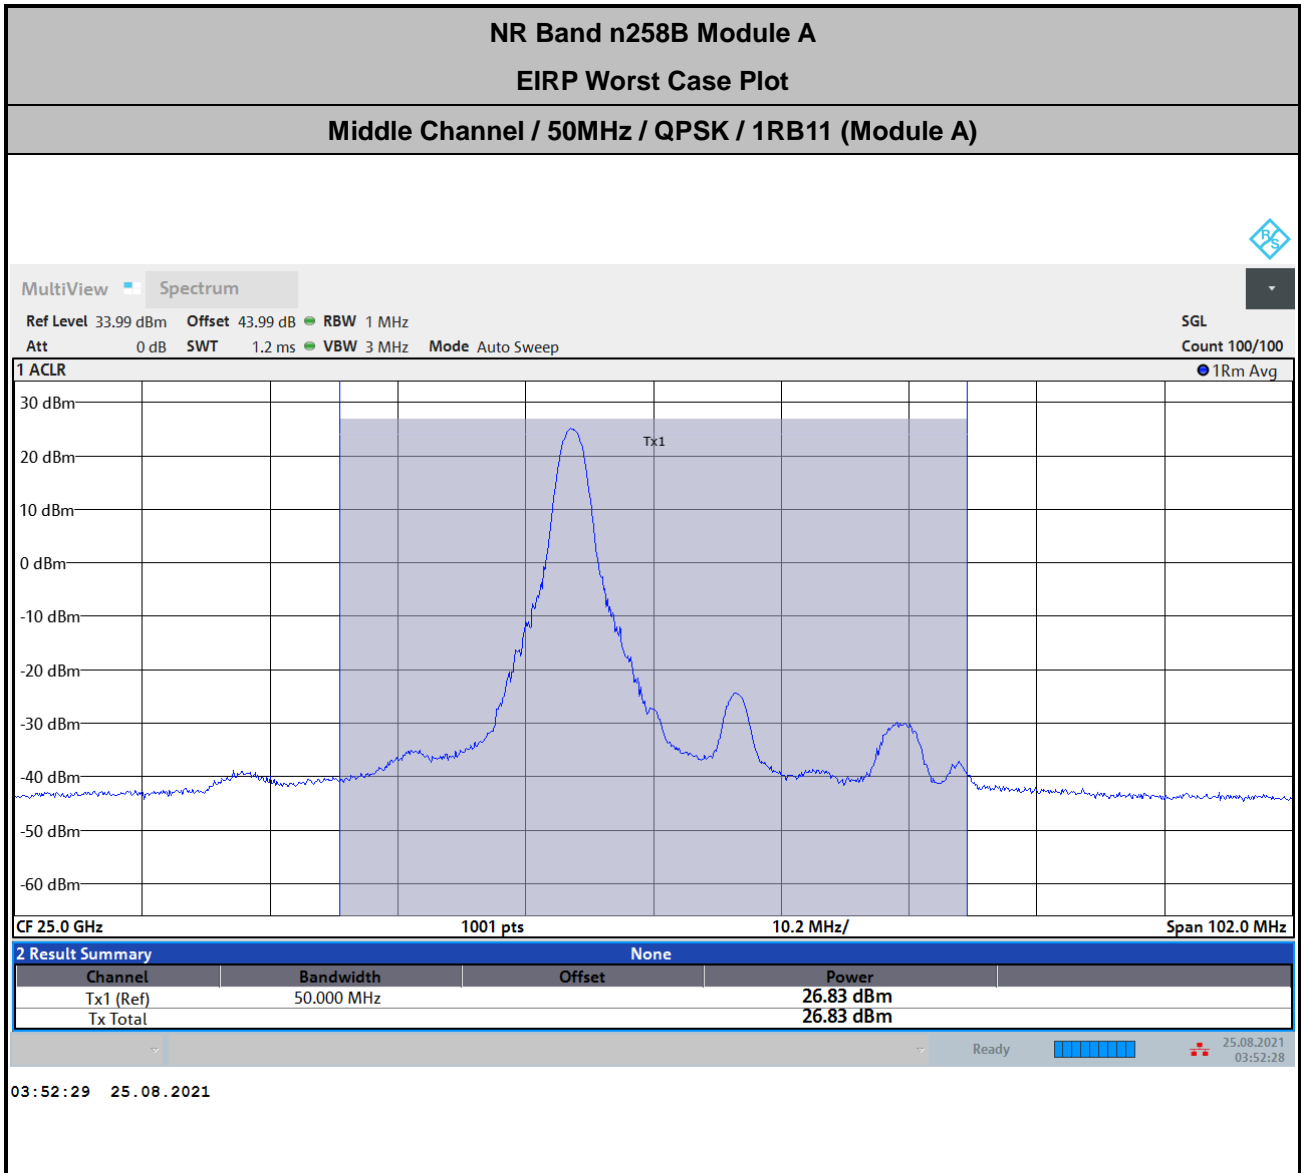

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.2 + 2.59 + 107 + 20log(1) – 104.8 = 43.99 (dB)



Module B


NR Band n258B Module B H (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	100	DFT-S	QPSK	20.81	20.76
	100	DFT-S	16QAM	18.35	17.97
	100	DFT-S	64QAM	15.84	15.67
	100	CP	QPSK	16.92	17.48
NR Band n258B Module B H (Beam ID: 5)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	100	DFT-S	QPSK	24.22	24.53
	100	DFT-S	16QAM	22.11	24.53
	100	DFT-S	64QAM	19.36	19.21
	100	CP	QPSK	20.49	21.02
NR Band n258B Module B H (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	100	DFT-S	QPSK	23.38	23.71
	100	DFT-S	16QAM	21.22	21.08
	100	DFT-S	64QAM	18.51	18.85
	100	CP	QPSK	19.77	20.62



NR Band n258B Module B V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	100	DFT-S	QPSK	24.63	24.50
	100	DFT-S	16QAM	20.68	21.27
	100	DFT-S	64QAM	19.67	19.49
	100	CP	QPSK	21.41	20.93
NR Band n258B Module B V (Beam ID: 5)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	100	DFT-S	QPSK	23.19	23.42
	100	DFT-S	16QAM	19.34	20.13
	100	DFT-S	64QAM	18.09	18.47
	100	CP	QPSK	20.32	19.71
NR Band n258B Module B V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	100	DFT-S	QPSK	23.57	24.03
	100	DFT-S	16QAM	19.87	20.84
	100	DFT-S	64QAM	18.46	18.91
	100	CP	QPSK	20.75	20.58



NR Band n258B Module B H+V (Beam ID: 2+2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	100	DFT-S	QPSK	24.95	24.97
	100	DFT-S	16QAM	21.78	21.92
	100	DFT-S	64QAM	19.84	19.77
	100	CP	QPSK	21.63	21.50
NR Band n258B Module B H+V (Beam ID: 5+5)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	100	DFT-S	QPSK	26.60	26.76
	100	DFT-S	16QAM	23.59	23.82
	100	DFT-S	64QAM	21.59	21.81
	100	CP	QPSK	23.05	23.25
NR Band n258B Module B H+V (Beam ID: 2+2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	100	DFT-S	QPSK	25.88	26.02
	100	DFT-S	16QAM	23.09	23.15
	100	DFT-S	64QAM	20.89	21.17
	100	CP	QPSK	23.35	23.36

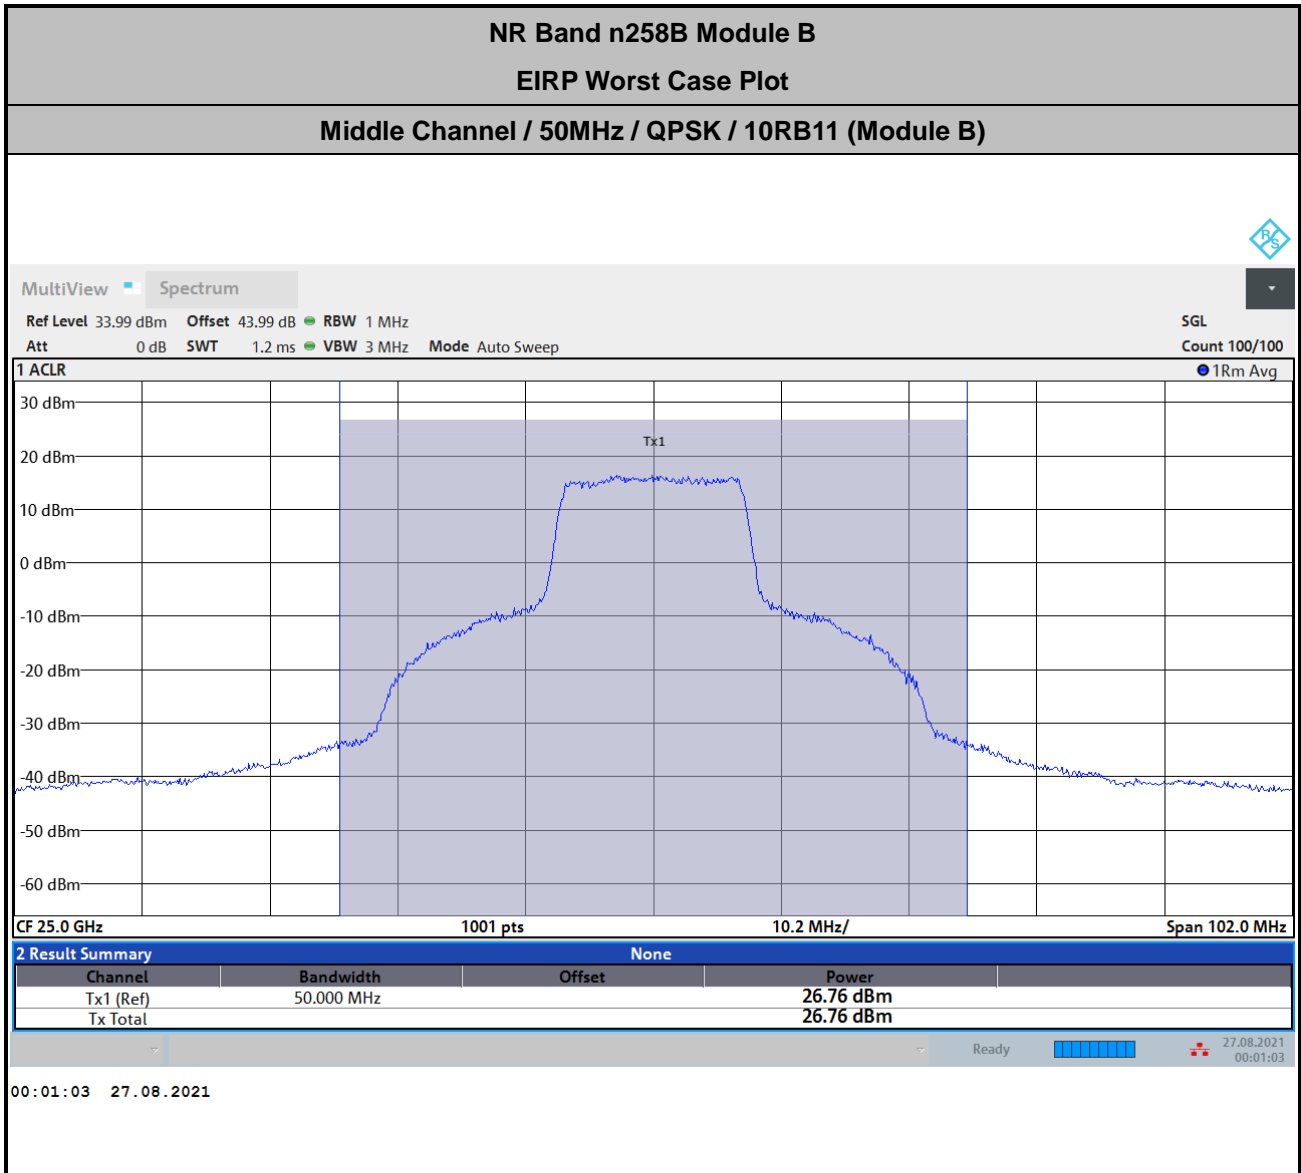

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.2 + 2.59 + 107 + 20log(1) – 104.8 = 43.99 (dB)



Module A

NR Band n260 Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	26.40	26.76
	50	DFT-S	16QAM	24.02	23.73
	50	DFT-S	64QAM	22.06	21.60
	50	CP	QPSK	23.13	23.23
NR Band n260 Module A H (Beam ID: 1)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	24.35	24.55
	50	DFT-S	16QAM	22.17	21.88
	50	DFT-S	64QAM	19.82	19.71
	50	CP	QPSK	21.01	21.32
NR Band n260 Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	23.43	23.49
	50	DFT-S	16QAM	20.47	20.54
	50	DFT-S	64QAM	17.37	18.01
	50	CP	QPSK	19.72	19.08




NR Band n260 Module A V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	26.41	26.43
	50	DFT-S	16QAM	22.52	23.35
	50	DFT-S	64QAM	21.26	21.77
	50	CP	QPSK	22.87	23.09
NR Band n260 Module A V (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	23.05	23.18
	50	DFT-S	16QAM	19.14	19.93
	50	DFT-S	64QAM	18.11	18.02
	50	CP	QPSK	19.56	19.74
NR Band n260 Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	23.79	24.19
	50	DFT-S	16QAM	20.15	21.02
	50	DFT-S	64QAM	18.81	18.99
	50	CP	QPSK	20.64	20.90





NR Band n260 Module A H+V (Beam ID: 4+4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	29.30	30.63
	50	DFT-S	16QAM	28.32	28.26
	50	DFT-S	64QAM	26.21	26.77
	50	CP	QPSK	27.85	27.94
NR Band n260 Module A H+V (Beam ID: 1+1)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	27.92	28.22
	50	DFT-S	16QAM	24.77	25.08
	50	DFT-S	64QAM	23.84	24.49
	50	CP	QPSK	24.35	24.72
NR Band n260 Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	30.81	30.92
	50	DFT-S	16QAM	28.30	28.54
	50	DFT-S	64QAM	25.73	26.47
	50	CP	QPSK	27.23	27.55

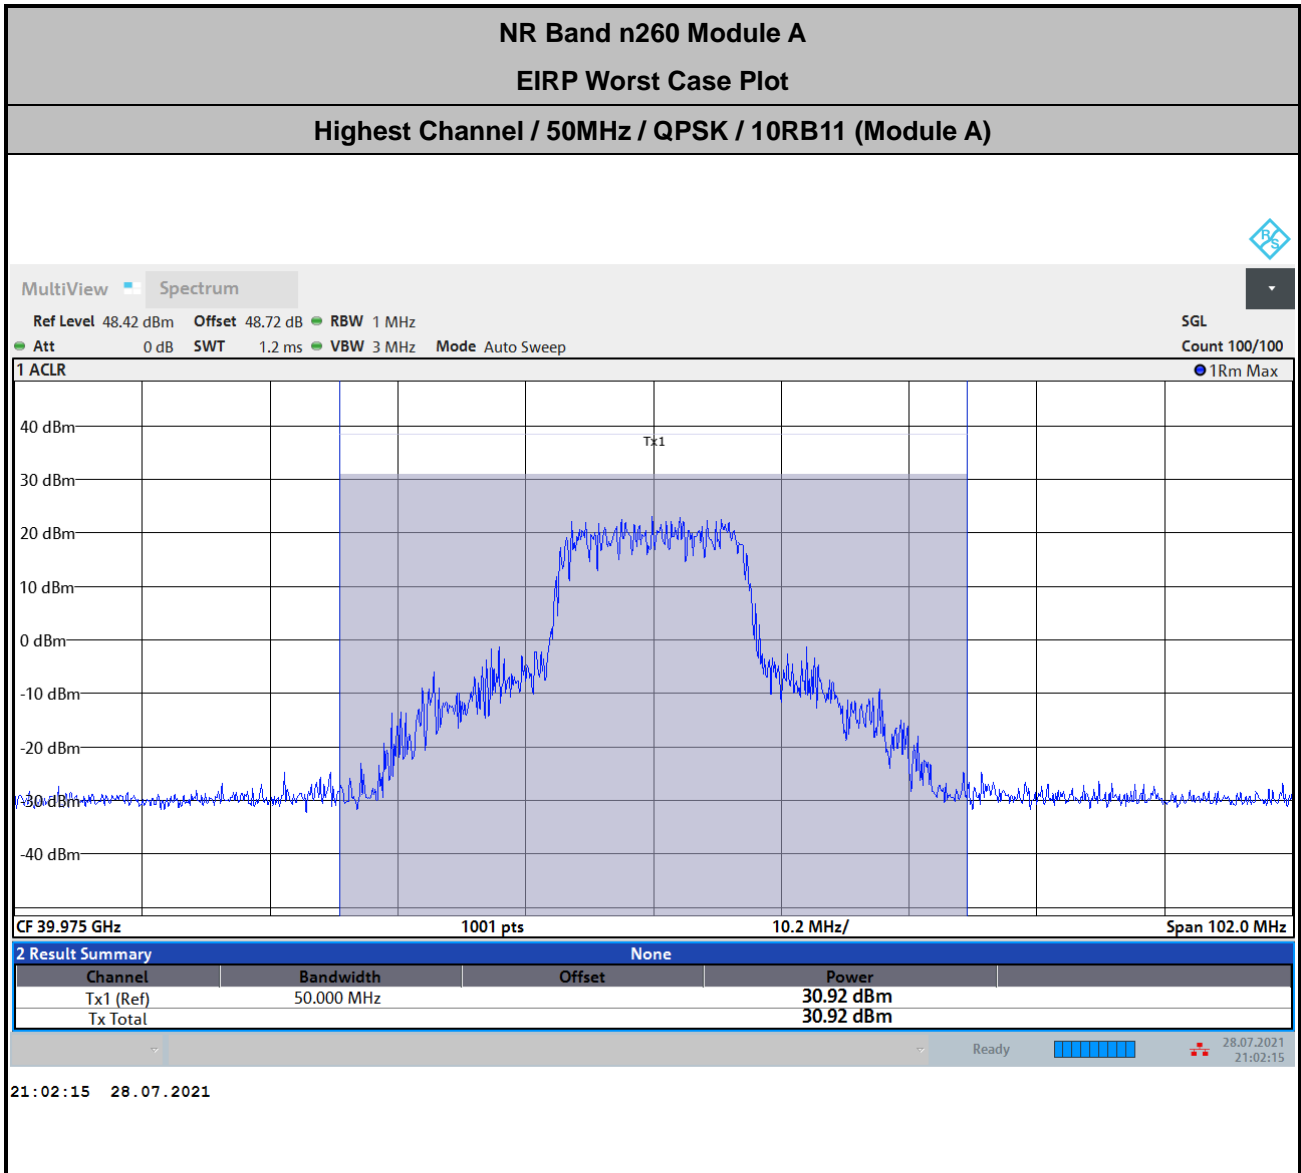

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 43.8 + 2.72 + 107 + 20log(1) – 104.8 = 48.72 (dB)



Module B


NR Band n260 Module B H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	23.77	24.18
	50	DFT-S	16QAM	21.32	21.03
	50	DFT-S	64QAM	19.06	18.91
	50	CP	QPSK	20.11	20.34
NR Band n260 Module B H (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	24.19	24.18
	50	DFT-S	16QAM	21.84	21.32
	50	DFT-S	64QAM	19.29	19.16
	50	CP	QPSK	20.74	21.08
NR Band n260 Module B H (Beam ID: 5)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	21.28	21.6
	50	DFT-S	16QAM	18.96	18.56
	50	DFT-S	64QAM	16.62	16.46
	50	CP	QPSK	17.92	18.35



NR Band n260 Module B V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	19.97	20.37
	50	DFT-S	16QAM	16.6	17.21
	50	DFT-S	64QAM	15.18	15.42
	50	CP	QPSK	17.37	17.13
NR Band n260 Module B V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	23.87	24.08
	50	DFT-S	16QAM	19.86	20.88
	50	DFT-S	64QAM	19.02	19.05
	50	CP	QPSK	20.44	20.43
NR Band n260 Module B V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	22.79	23.08
	50	DFT-S	16QAM	19.12	19.91
	50	DFT-S	64QAM	17.72	18.05
	50	CP	QPSK	19.86	19.69



NR Band n260 Module B H+V (Beam ID: 4+4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	28.37	29.13
	50	DFT-S	16QAM	25.47	26.66
	50	DFT-S	64QAM	23.25	24.08
	50	CP	QPSK	24.52	25.76
NR Band n260 Module B H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	28.66	29.19
	50	DFT-S	16QAM	26.12	26.99
	50	DFT-S	64QAM	24.72	25.71
	50	CP	QPSK	26.44	26.06
NR Band n260 Module B H+V (Beam ID: 2+2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	28.65	29.66
	50	DFT-S	16QAM	25.8	26.51
	50	DFT-S	64QAM	23.86	25.15
	50	CP	QPSK	25.25	25.48

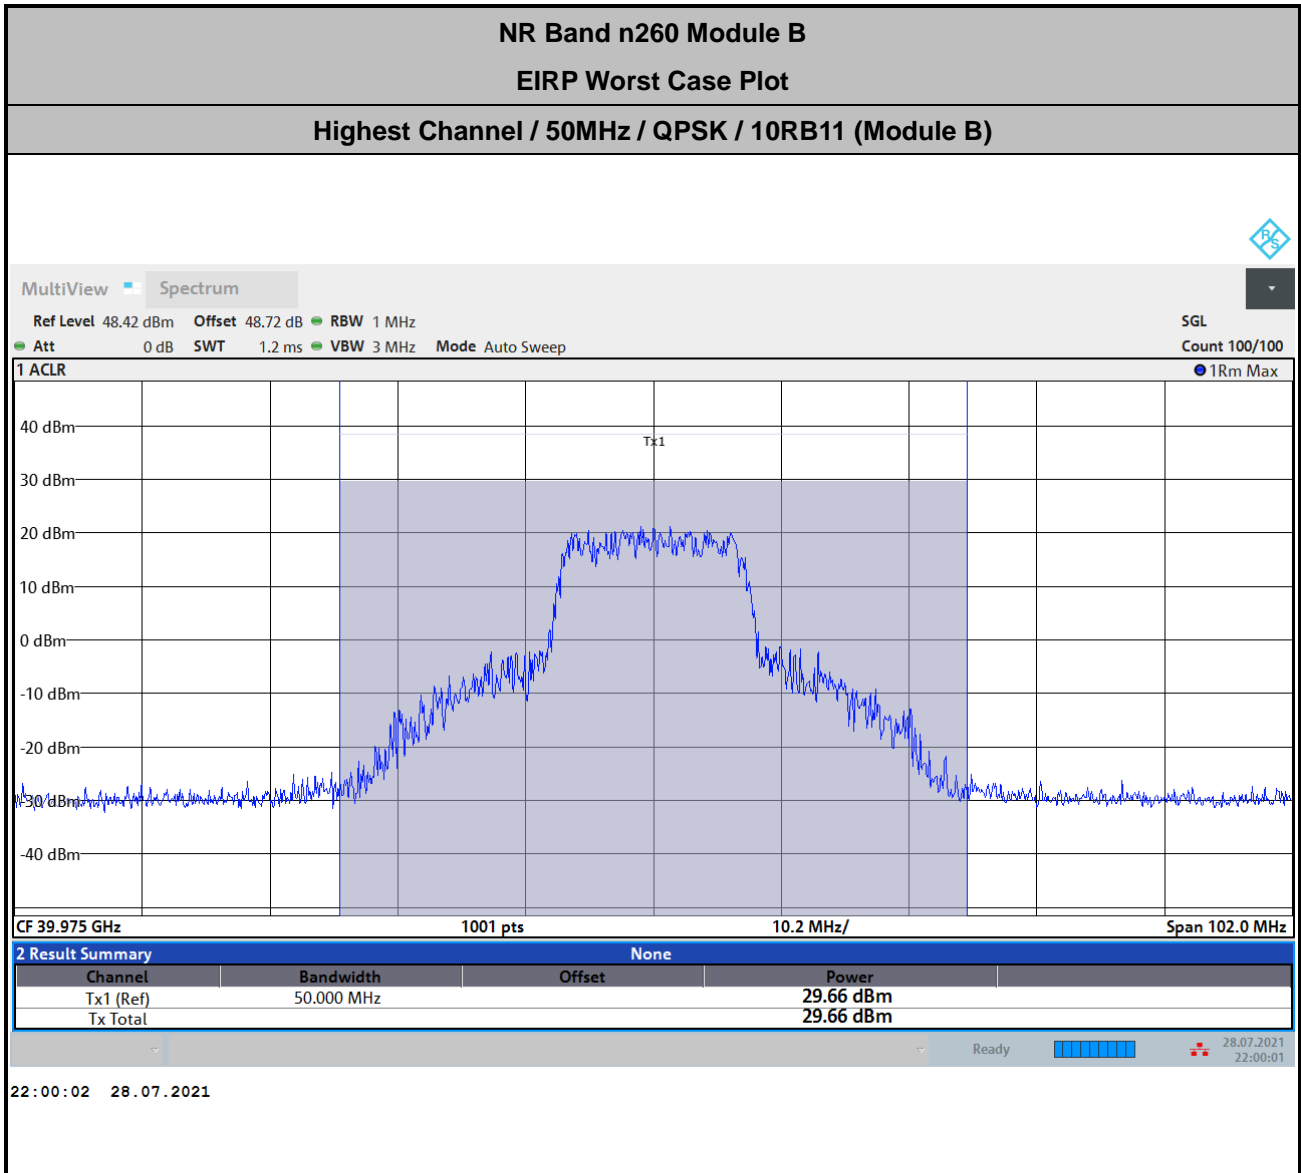

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 43.8 + 2.72 + 107 + 20log(1) – 104.8 = 48.72 (dB)



**Module A**

NR Band n261 Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	50	DFT-S	QPSK	26.32	26.43
	50	DFT-S	16QAM	23.88	23.53
	50	DFT-S	64QAM	21.49	21.68
	50	CP	QPSK	22.46	23.36
NR Band n261 Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	50	DFT-S	QPSK	26.07	26.26
	50	DFT-S	16QAM	24	23.56
	50	DFT-S	64QAM	21.3	21.99
	50	CP	QPSK	23.74	23.53
NR Band n261 Module A H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	50	DFT-S	QPSK	27.17	27.3
	50	DFT-S	16QAM	24.63	24.21
	50	DFT-S	64QAM	22.8	22.28
	50	CP	QPSK	24.3	24.11




NR Band n261 Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	50	DFT-S	QPSK	26.18	26.34
	50	DFT-S	16QAM	22.53	23.13
	50	DFT-S	64QAM	21.37	21.46
	50	CP	QPSK	23.47	23.26
NR Band n261 Module A V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	50	DFT-S	QPSK	26.46	26.32
	50	DFT-S	16QAM	22.48	23.18
	50	DFT-S	64QAM	21.45	21.47
	50	CP	QPSK	22.96	23.06
NR Band n261 Module A V (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	50	DFT-S	QPSK	26.34	26.21
	50	DFT-S	16QAM	22.17	22.87
	50	DFT-S	64QAM	21.06	21.4
	50	CP	QPSK	23.42	22.9





NR Band n261 Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	31	31.65
	50	DFT-S	16QAM	27.68	28.63
	50	DFT-S	64QAM	26.69	27.08
	50	CP	QPSK	28.1	28.05
NR Band n261 Module A H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	31.42	31.84
	50	DFT-S	16QAM	28.69	29.58
	50	DFT-S	64QAM	27.34	27.56
	50	CP	QPSK	28.3	28.76
NR Band n261 Module A H+V (Beam ID: 4+4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	30.07	30.72
	50	DFT-S	16QAM	26.94	27.51
	50	DFT-S	64QAM	25.05	25.43
	50	CP	QPSK	26.72	27.57

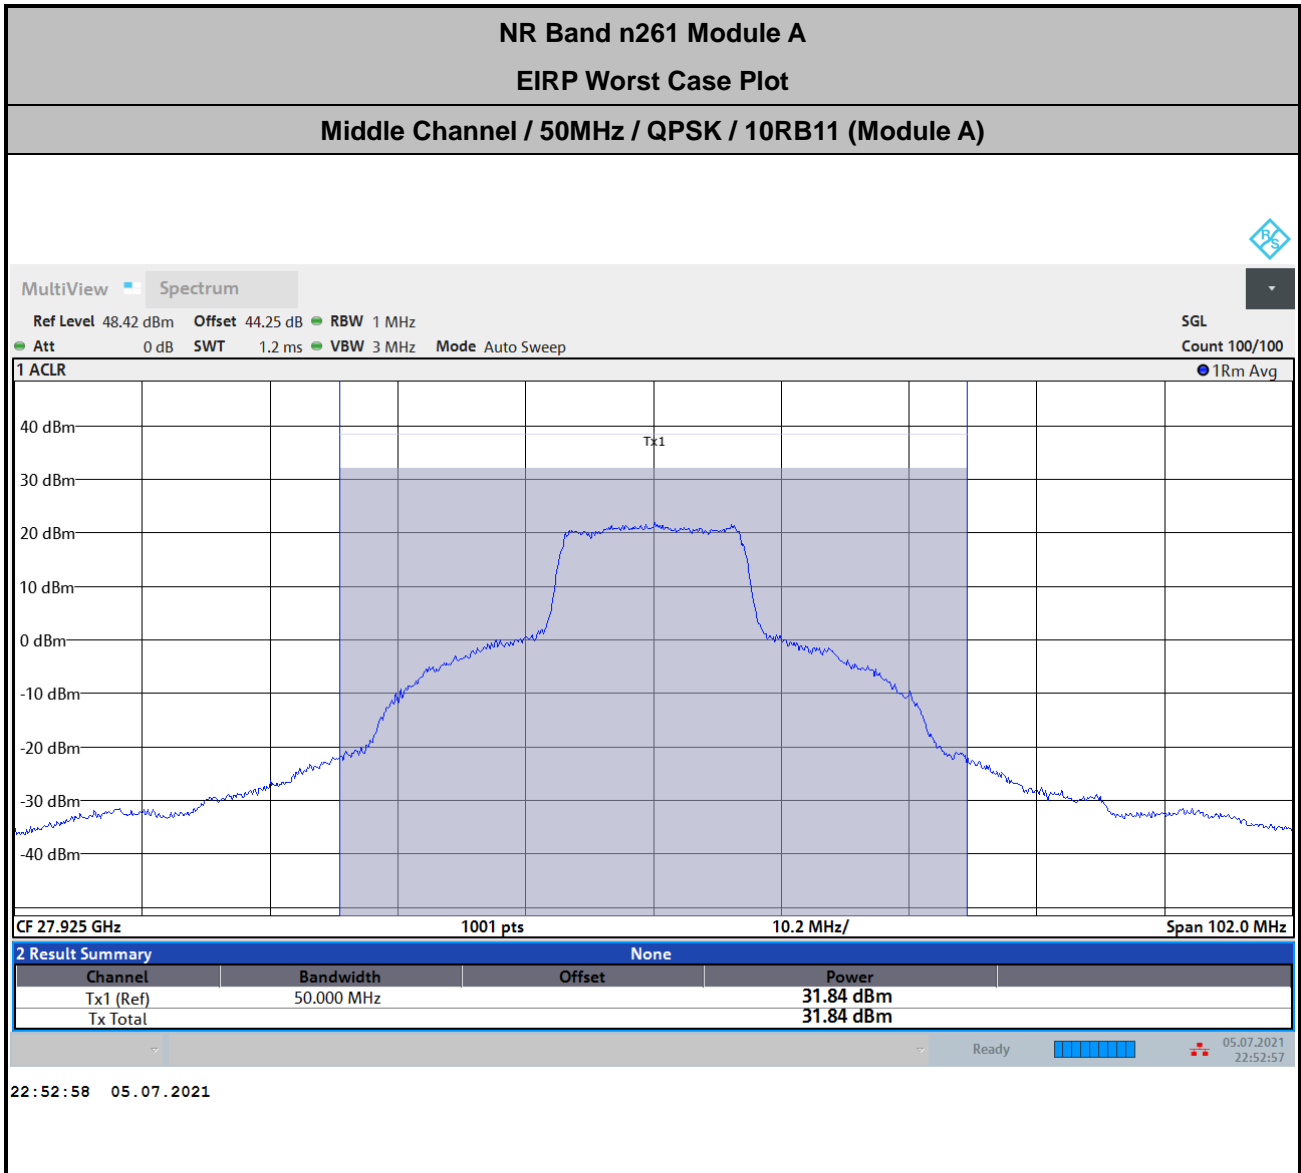

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.4 + 2.65 + 107 + 20log(1) – 104.8 = 44.25 (dB)



Module B


NR Band n261 Module B H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	26.19	26.65
	50	DFT-S	16QAM	23.42	23.76
	50	DFT-S	64QAM	22.02	21.90
	50	CP	QPSK	23.10	23.49
NR Band n261 Module B H (Beam ID: 4)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	25.79	25.93
	50	DFT-S	16QAM	23.36	23.08
	50	DFT-S	64QAM	21.58	21.12
	50	CP	QPSK	22.82	22.68
NR Band n261 Module B H (Beam ID: 2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	27.12	27.47
	50	DFT-S	16QAM	24.66	24.44
	50	DFT-S	64QAM	23.09	22.64
	50	CP	QPSK	24.21	24.18



NR Band n261 Module B V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Lowest</b>	50	DFT-S	QPSK	26.54	26.72
	50	DFT-S	16QAM	23.06	23.72
	50	DFT-S	64QAM	21.87	21.80
	50	CP	QPSK	23.10	23.39
NR Band n261 Module B V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Middle</b>	50	DFT-S	QPSK	26.80	26.91
	50	DFT-S	16QAM	23.22	23.83
	50	DFT-S	64QAM	21.89	22.13
	50	CP	QPSK	23.70	23.54
NR Band n261 Module B V (Beam ID: 3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
<b>Highest</b>	50	DFT-S	QPSK	26.41	26.50
	50	DFT-S	16QAM	22.34	23.56
	50	DFT-S	64QAM	21.00	21.69
	50	CP	QPSK	22.90	23.04



NR Band n261 Module B H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Lowest	50	DFT-S	QPSK	31.46	31.79
	50	DFT-S	16QAM	28.92	29.45
	50	DFT-S	64QAM	26.26	26.87
	50	CP	QPSK	28.76	28.92
NR Band n261 Module B H+V (Beam ID: 3+3)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Middle	50	DFT-S	QPSK	31.14	31.75
	50	DFT-S	16QAM	28.55	29.39
	50	DFT-S	64QAM	26.09	26.65
	50	CP	QPSK	28.17	28.29
NR Band n261 Module B H+V (Beam ID: 2+2)					
Maximum Average EIRP [dBm]					
	BW [MHz]	Waveform	Modulation	Inner 1RB	Inner Full
Highest	50	DFT-S	QPSK	30.61	30.85
	50	DFT-S	16QAM	28.56	28.93
	50	DFT-S	64QAM	26.54	26.62
	50	CP	QPSK	27.98	28.14

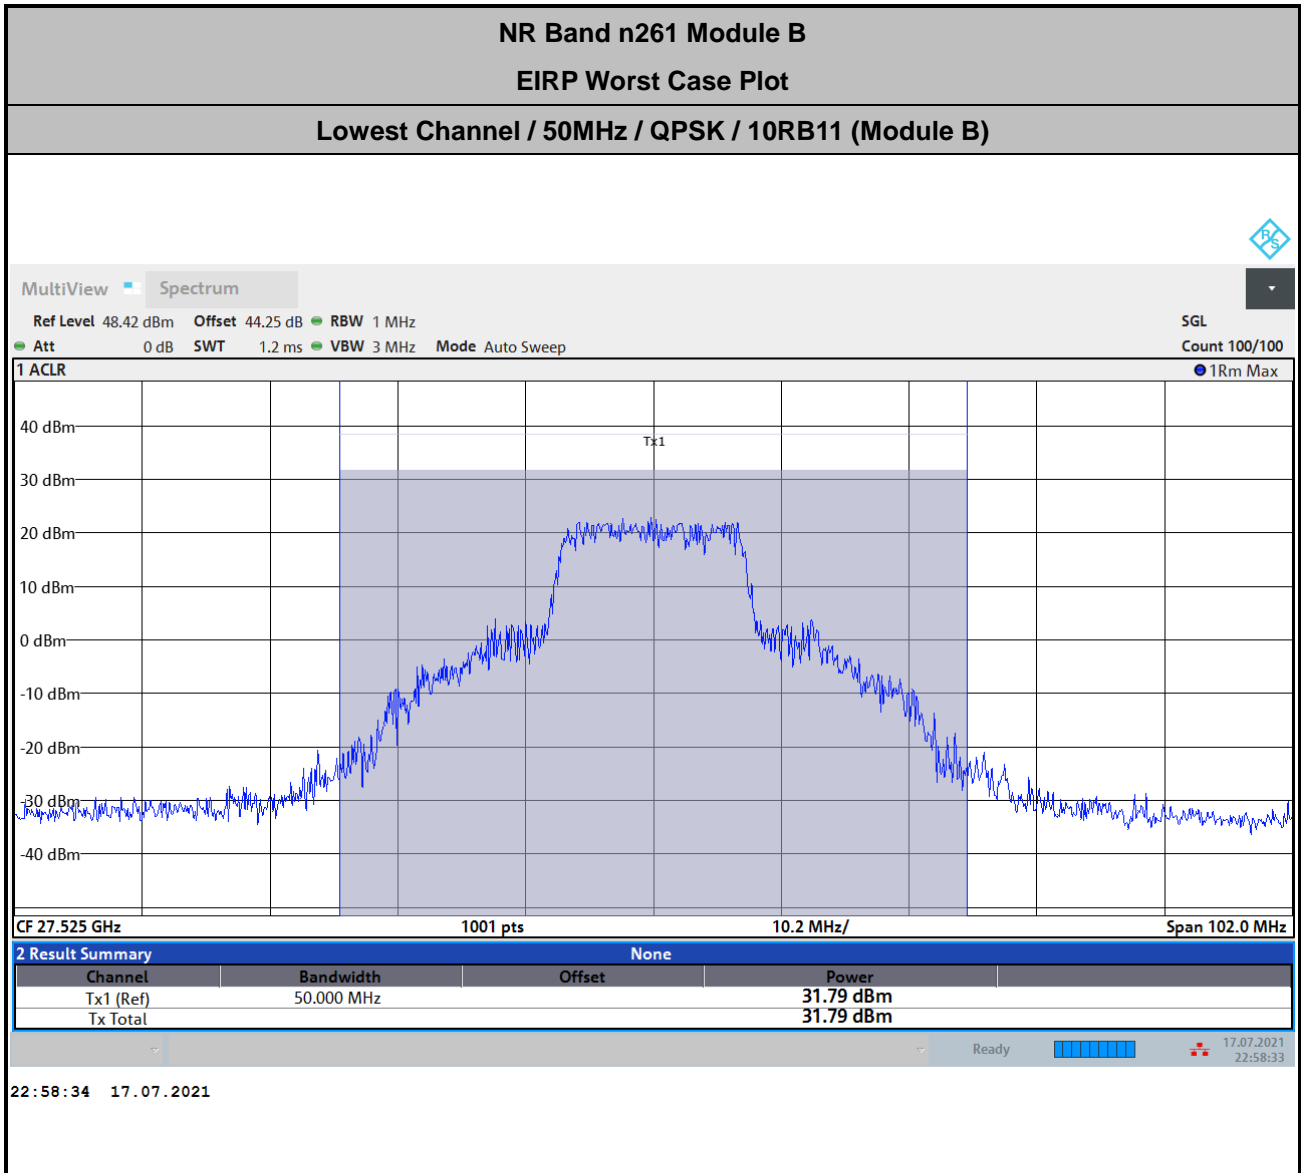

Note: Offset = Antenna Factor (dB/m) + Cable Loss (dB) + 107 + 20log(D) – 104.8  
 = 39.4 + 2.65 + 107 + 20log(1) – 104.8 = 44.25 (dB)



## NR Band n258A Module A Beam H

### Occupied Bandwidth

Mode	DFT-s-OFDM Module A NR Band n258A : 99%OBW(MHz)		
BW	50MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	45.90	46.23	46.01
Middle CH	45.87	46.18	46.02
Highest CH	45.90	46.20	46.02


Mode	CP-OFDM Module A NR Band n258A : 99%OBW(MHz)
BW	50MHz
Mod.	QPSK
Lowest CH	46.05
Middle CH	46.07
Highest CH	46.10




DFT-s-OFDM Module A

NR Band n258A


Lowest Channel / 50MHz / QPSK

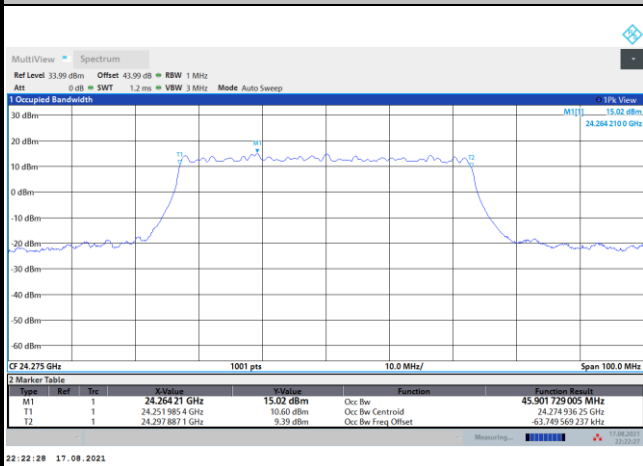


Lowest Channel / 50MHz / 16QAM

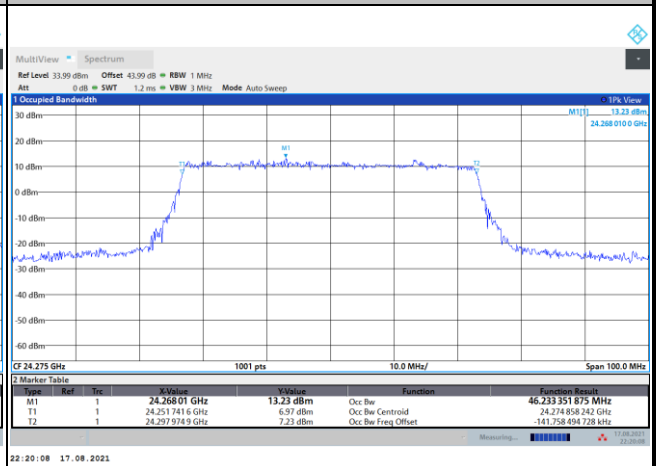


Middle Channel / 50MHz / QPSK

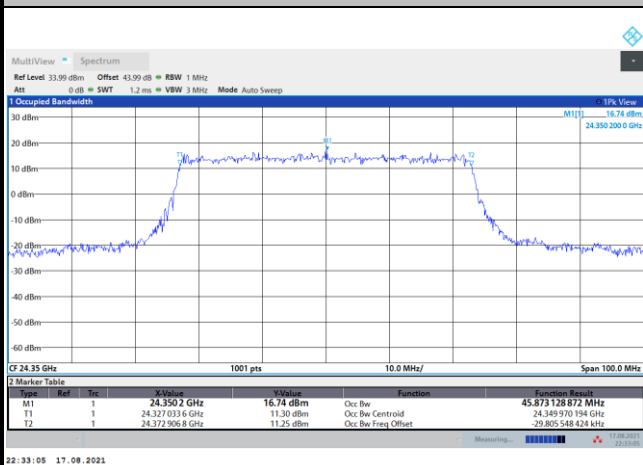


Middle Channel / 50MHz / 16QAM

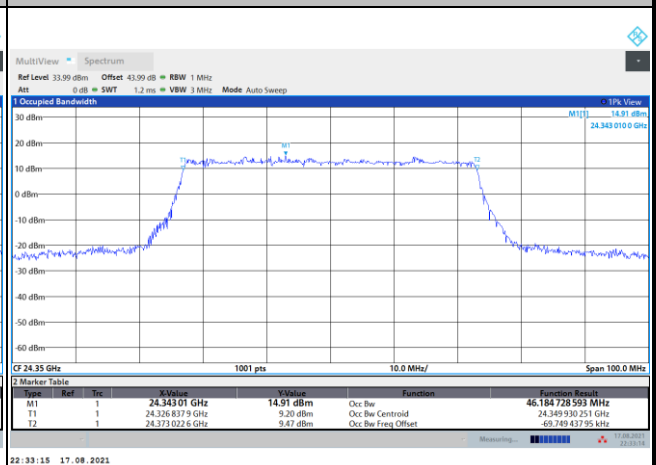

Highest Channel / 50MHz / QPSK

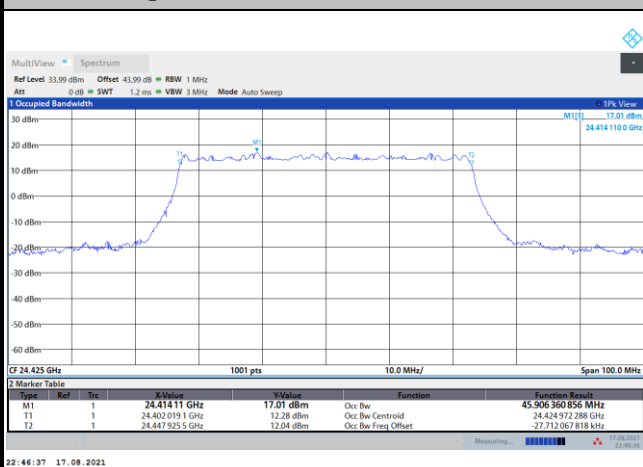

Highest Channel / 50MHz / 16QAM

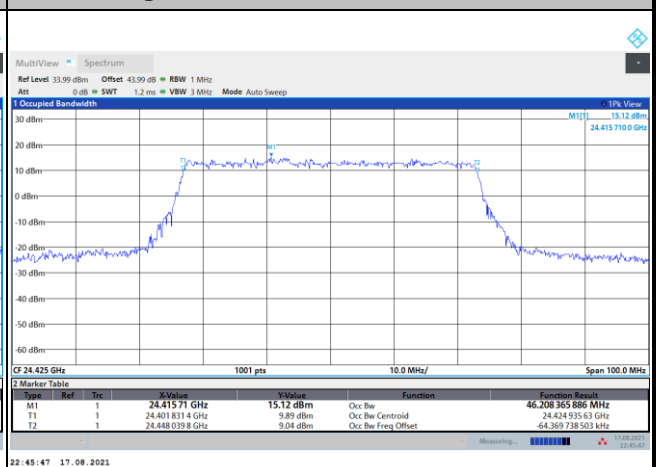






DFT-s-OFDM Module A


NR Band n258A

Lowest Channel / 50MHz / 64QAM

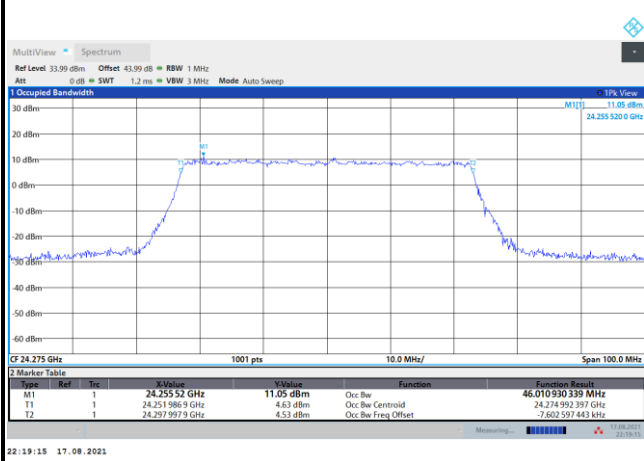


intentionally blank

Middle Channel / 50MHz / 64QAM

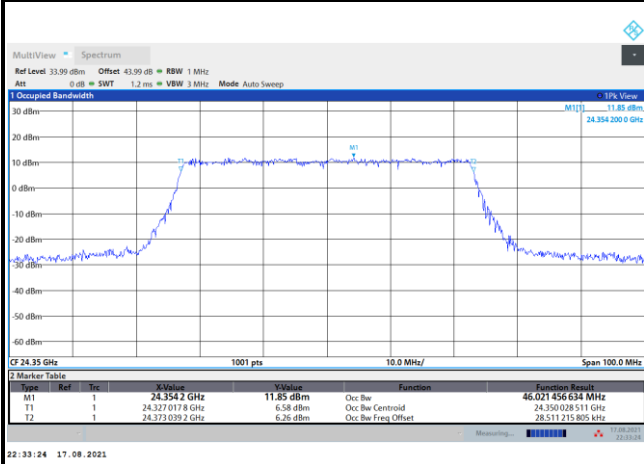

intentionally blank

Highest Channel / 50MHz / 64QAM

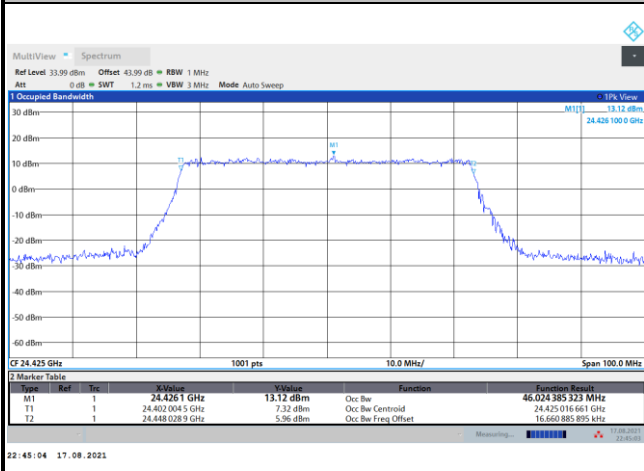


intentionally blank



CP-OFDM Module A


NR Band n258A

Lowest Channel / 50MHz / QPSK

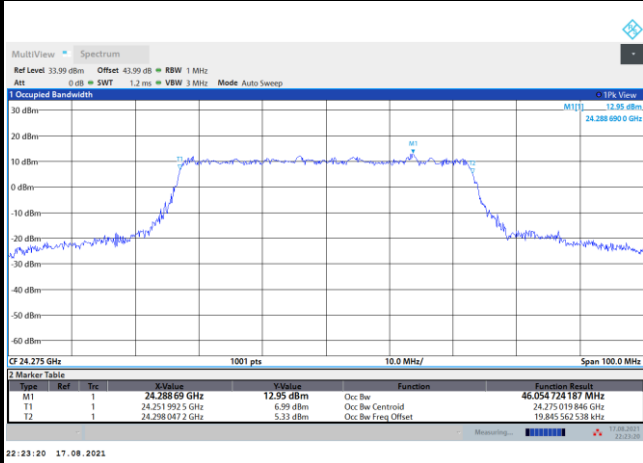


intentionally blank

Middle Channel / 50MHz / QPSK

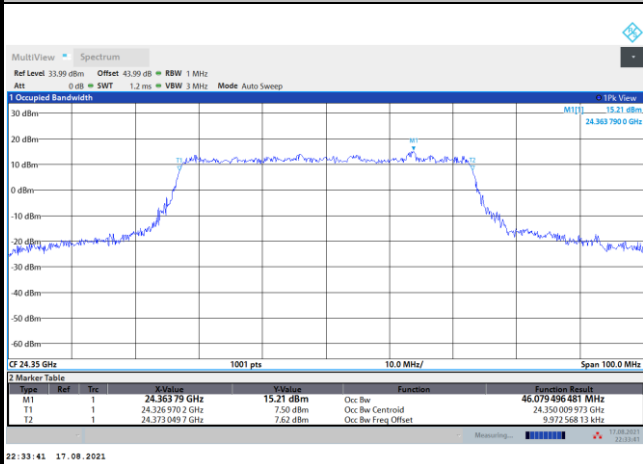

intentionally blank

Highest Channel / 50MHz / QPSK

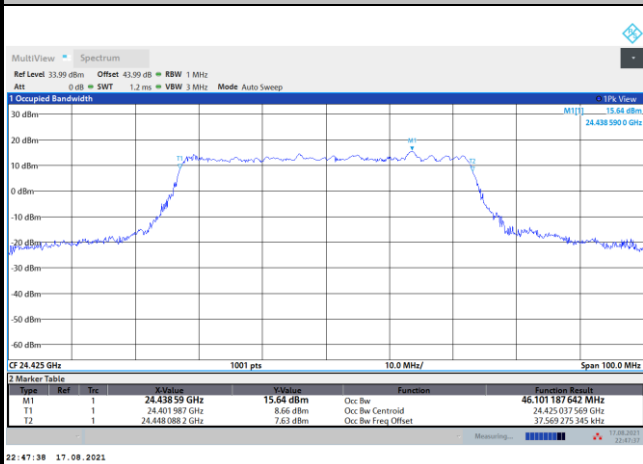

intentionally blank



### Radiated Out of Band Emissions

Mode			DFT-s-OFDM Module A NR Band n258A : BE (dBm) 1 RB		
BW			50MHz		
Limit (dBm)			QPSK	16QAM	64QAM
Low CH	0~10%OB	≤ -5	-10.70	-11.26	-14.03
	>10%OB	≤ -13	-39.12	-39.76	-40.93
High CH	0~10%OB	≤ -5	-9.80	-10.16	-11.95
	>10%OB	≤ -13	-37.72	-37.90	-39.22
Result			Compliance		

Mode			CP-OFDM Module A NR Band n258A : BE (dBm) 1 RB		
BW			50MHz		
Limit (dBm)			QPSK		
Low CH	0~10%OB	≤ -5	-13.20		
	>10%OB	≤ -13	-40.53		
High CH	0~10%OB	≤ -5	-10.85		
	>10%OB	≤ -13	-38.96		
Result			Compliance		

Mode			DFT-s-OFDM Module A NR Band n258A : BE (dBm) Full RB		
BW			50MHz		
Limit (dBm)			QPSK	16QAM	64QAM
Low CH	0~10%OB	≤ -5	-21.40	-21.90	-23.89
	>10%OB	≤ -13	-28.08	-29.74	-33.56
High CH	0~10%OB	≤ -5	-19.32	-20.58	-21.93
	>10%OB	≤ -13	-26.60	-29.55	-32.21
Result			Compliance		


Mode			CP-OFDM Module A NR Band n258A : BE (dBm) Full RB		
BW			50MHz		
Limit (dBm)			QPSK		
Low CH	0~10%OB	≤ -5	-22.30		
	>10%OB	≤ -13	-28.18		
High CH	0~10%OB	≤ -5	-20.62		
	>10%OB	≤ -13	-26.78		
Result			Compliance		




DFT-s-OFDM Module A

NR Band n258A / 50MHz / QPSK

Lowest Band Edge / 1 RB

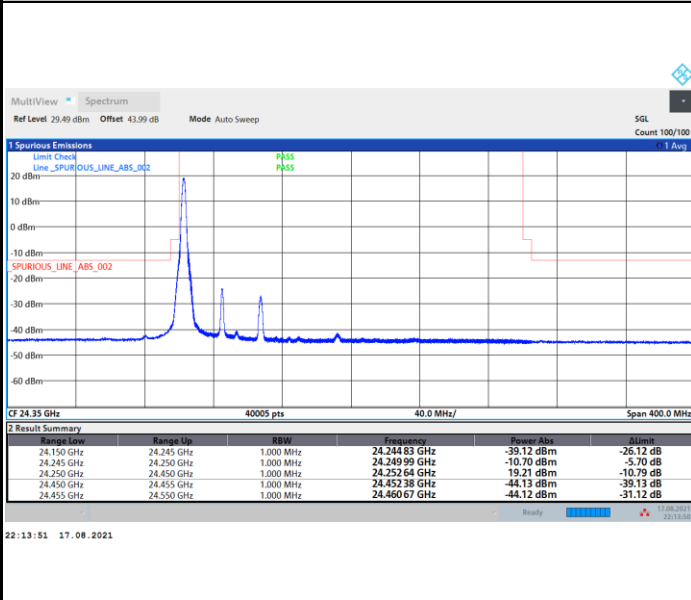


Highest Band Edge / 1 RB

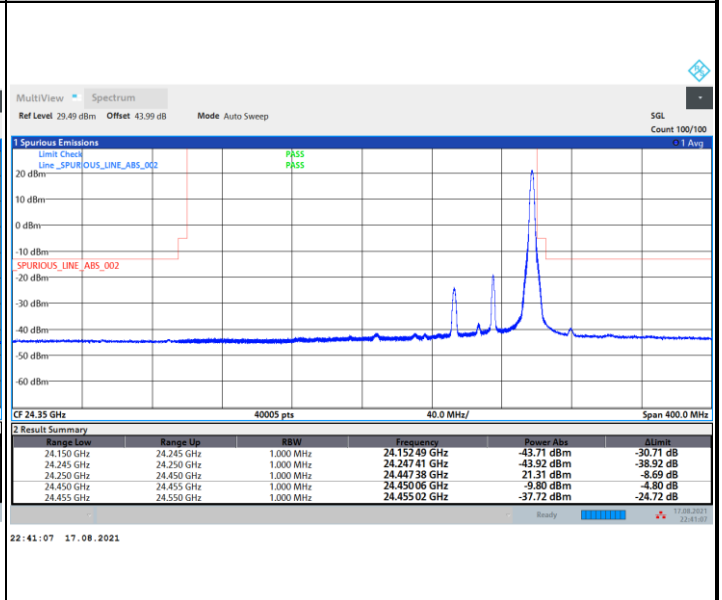


NR Band n258A / 50MHz / 16QAM

Lowest Band Edge / 1 RB

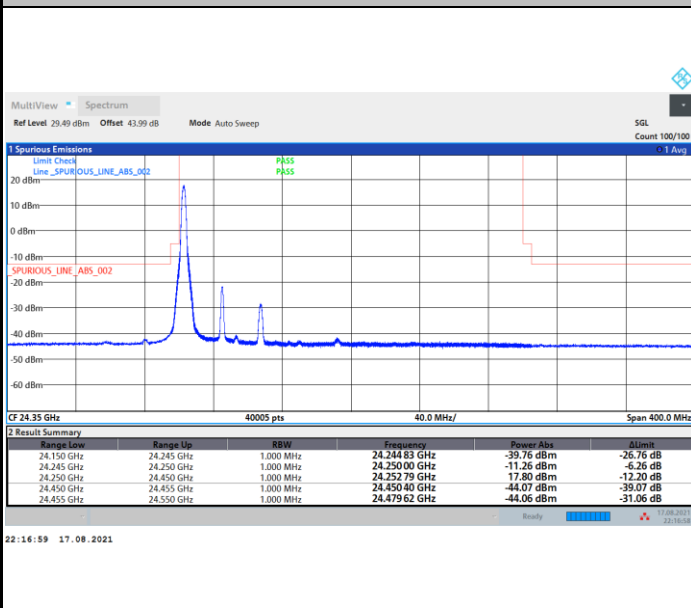


Highest Band Edge / 1 RB

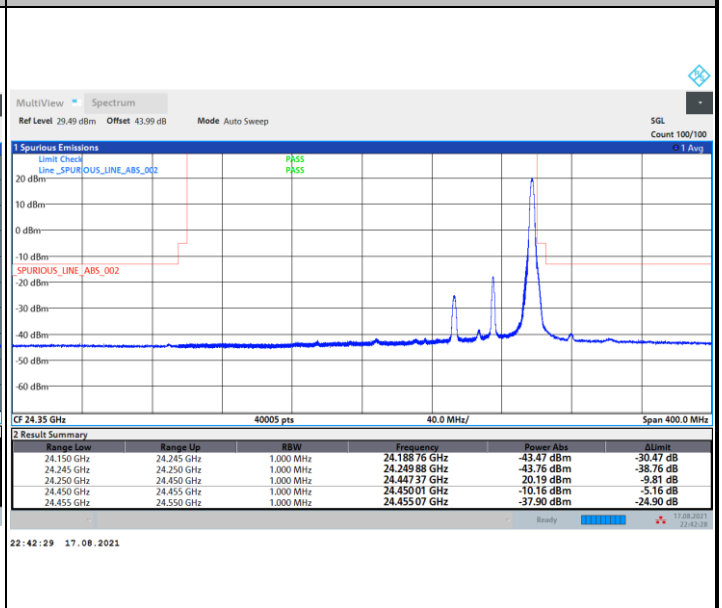




DFT-s-OFDM Module A

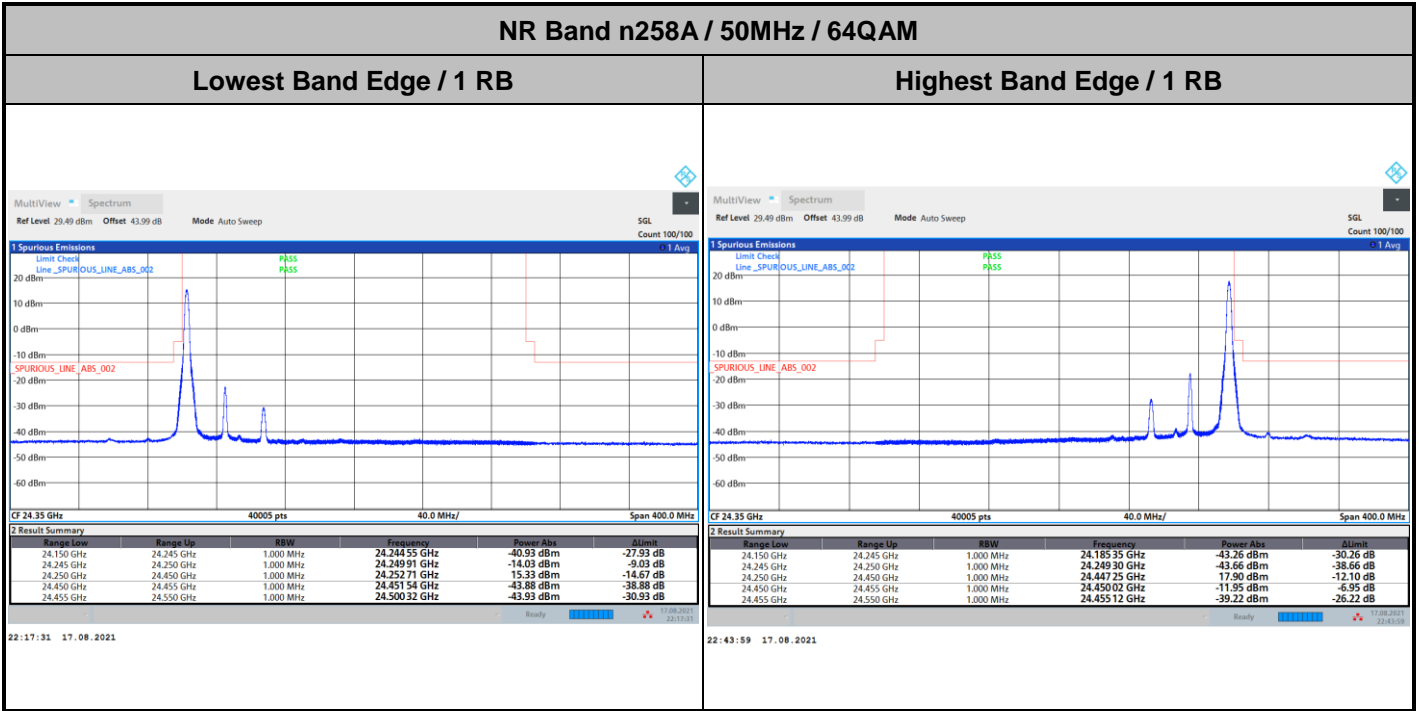

CP-OFDM Module A

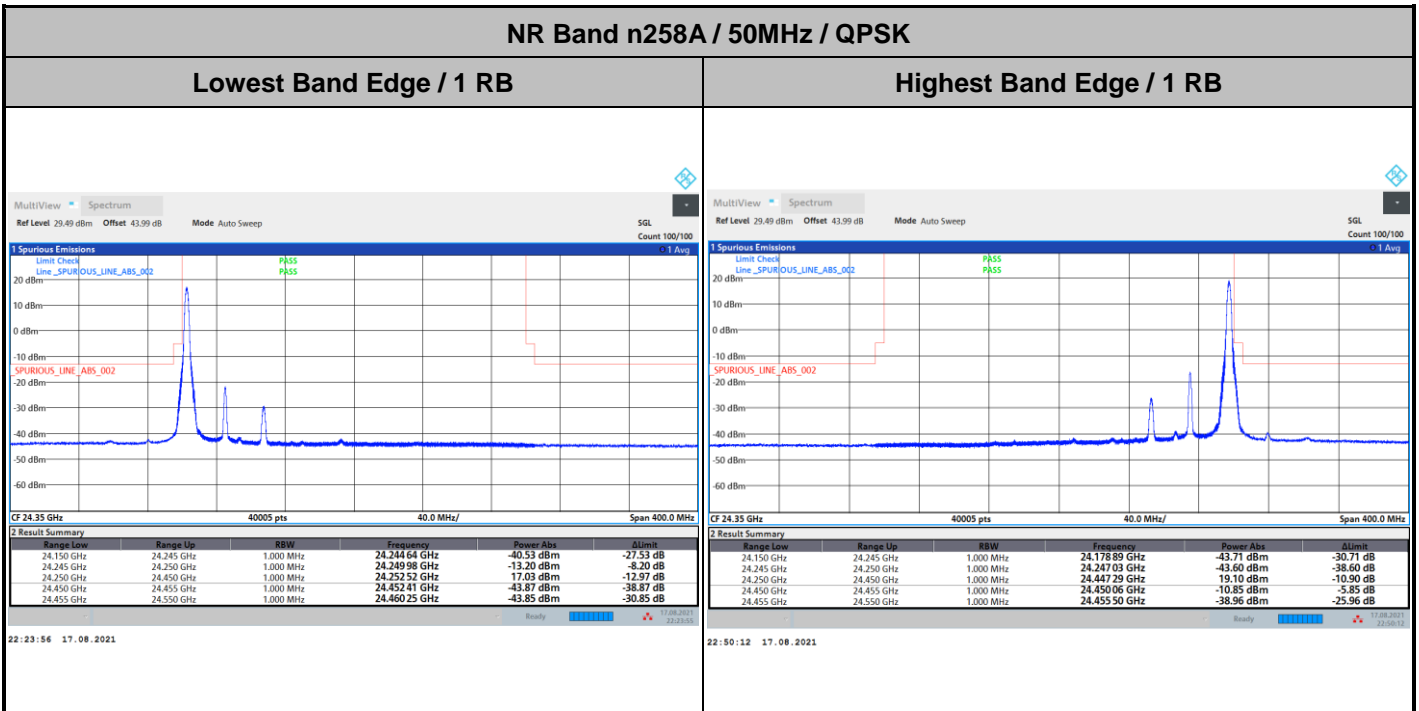




DFT-s-OFDM Module A

NR Band n258A / 50MHz / QPSK


Lowest Band Edge / Full RB

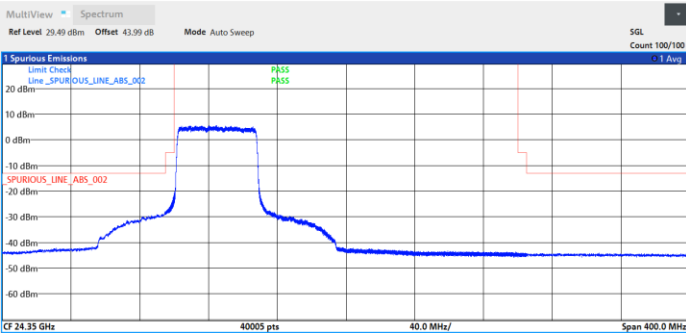

Range Low	Range Up	RBW	Frequency	Power Abs	Limit
24.150 GHz	24.245 GHz	1.000 MHz	24.24459 GHz	-28.08 dBm	-15.08 dB
24.245 GHz	24.250 GHz	1.000 MHz	24.24996 GHz	-21.40 dBm	-16.40 dB
24.250 GHz	24.450 GHz	1.000 MHz	24.27486 GHz	5.68 dBm	-24.32 dB
24.450 GHz	24.455 GHz	1.000 MHz	24.45035 GHz	-44.06 dBm	-39.06 dB
24.455 GHz	24.550 GHz	1.000 MHz	24.49718 GHz	-44.12 dBm	-31.12 dB

22:21:46 17.08.2021

Highest Band Edge / Full RB

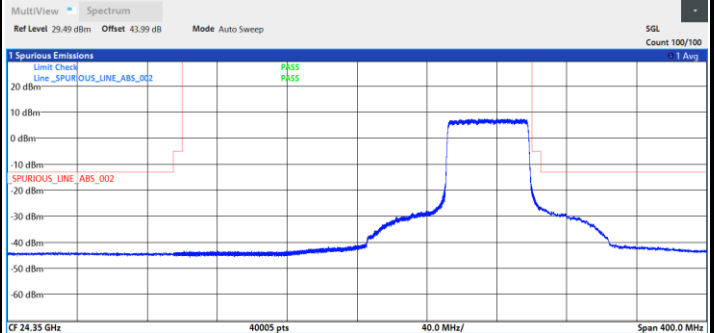


Range Low	Range Up	RBW	Frequency	Power Abs	Limit
24.150 GHz	24.245 GHz	1.000 MHz	24.20101 GHz	-43.65 dBm	-30.65 dB
24.245 GHz	24.250 GHz	1.000 MHz	24.24504 GHz	-43.77 dBm	-38.77 dB
24.250 GHz	24.450 GHz	1.000 MHz	24.43590 GHz	7.50 dBm	-22.50 dB
24.450 GHz	24.455 GHz	1.000 MHz	24.45008 GHz	-19.32 dBm	-14.32 dB
24.455 GHz	24.550 GHz	1.000 MHz	24.45521 GHz	-26.60 dBm	-13.60 dB

22:46:27 17.08.2021

NR Band n258A / 50MHz / 16QAM


Lowest Band Edge / Full RB

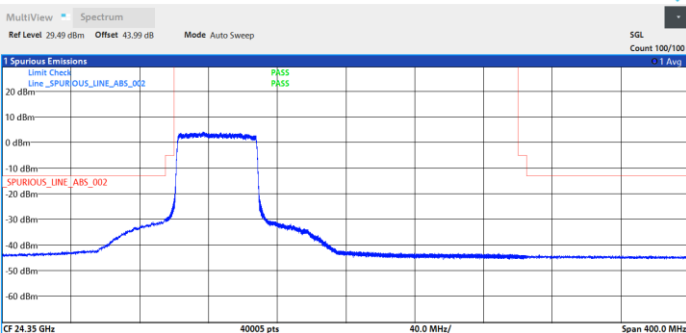

Range Low	Range Up	RBW	Frequency	Power Abs	Limit
24.150 GHz	24.245 GHz	1.000 MHz	24.24488 GHz	-29.74 dBm	-16.74 dB
24.245 GHz	24.250 GHz	1.000 MHz	24.24998 GHz	-21.90 dBm	-16.90 dB
24.250 GHz	24.450 GHz	1.000 MHz	24.26657 GHz	4.09 dBm	-25.91 dB
24.450 GHz	24.455 GHz	1.000 MHz	24.45009 GHz	-43.94 dBm	-38.94 dB
24.455 GHz	24.550 GHz	1.000 MHz	24.46224 GHz	-43.97 dBm	-30.97 dB

22:20:02 17.08.2021

Highest Band Edge / Full RB

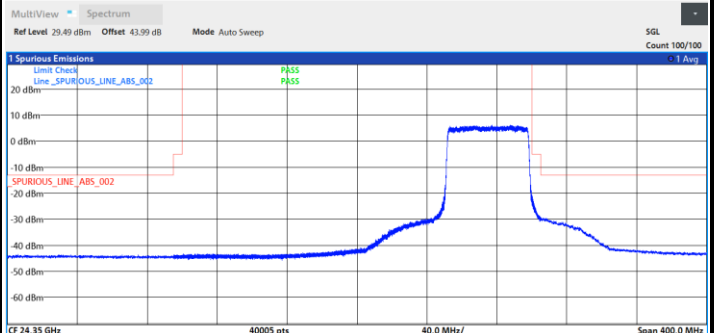


Range Low	Range Up	RBW	Frequency	Power Abs	Limit
24.150 GHz	24.245 GHz	1.000 MHz	24.15591 GHz	-43.47 dBm	-30.47 dB
24.245 GHz	24.250 GHz	1.000 MHz	24.24689 GHz	-43.60 dBm	-38.60 dB
24.250 GHz	24.450 GHz	1.000 MHz	24.43773 GHz	6.20 dBm	-23.80 dB
24.450 GHz	24.455 GHz	1.000 MHz	24.45001 GHz	-20.58 dBm	-15.58 dB
24.455 GHz	24.550 GHz	1.000 MHz	24.45520 GHz	-29.55 dBm	-16.55 dB


22:45:41 17.08.2021



DFT-s-OFDM Module A

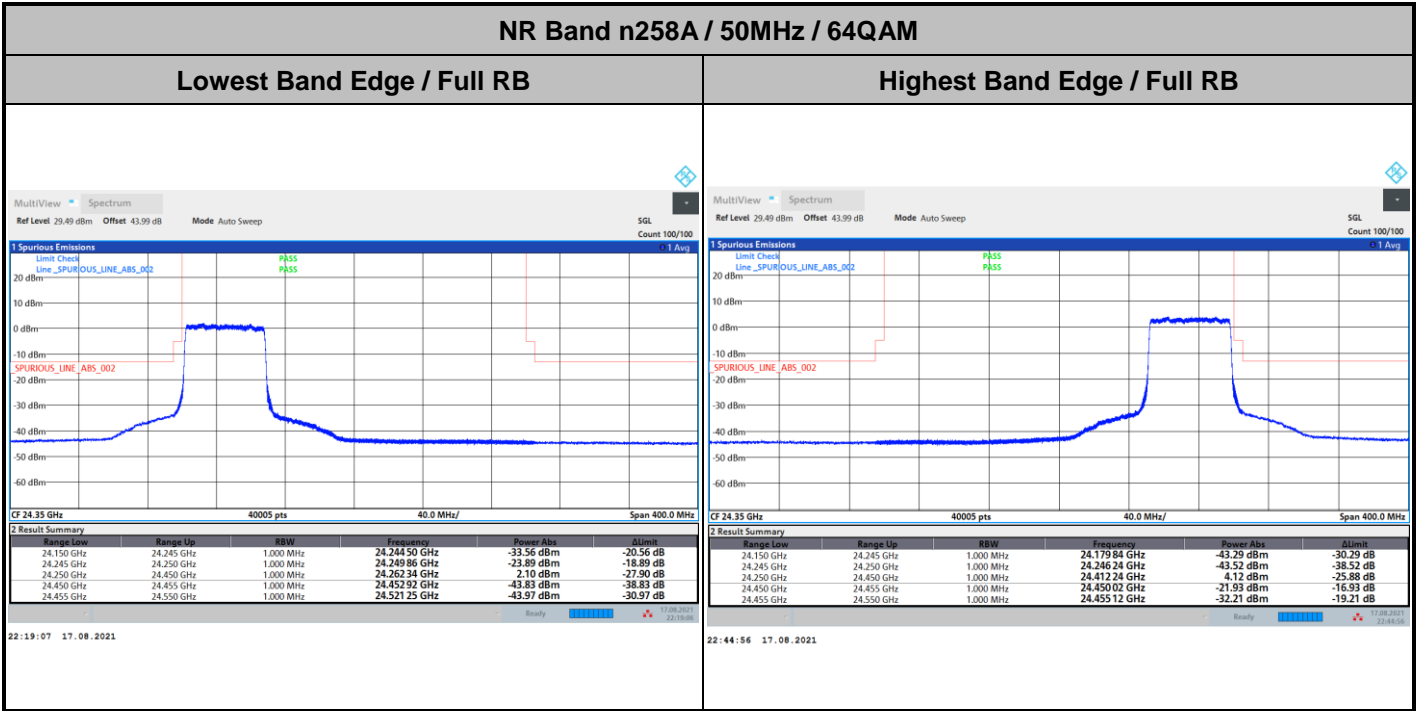

CP-OFDM Module A

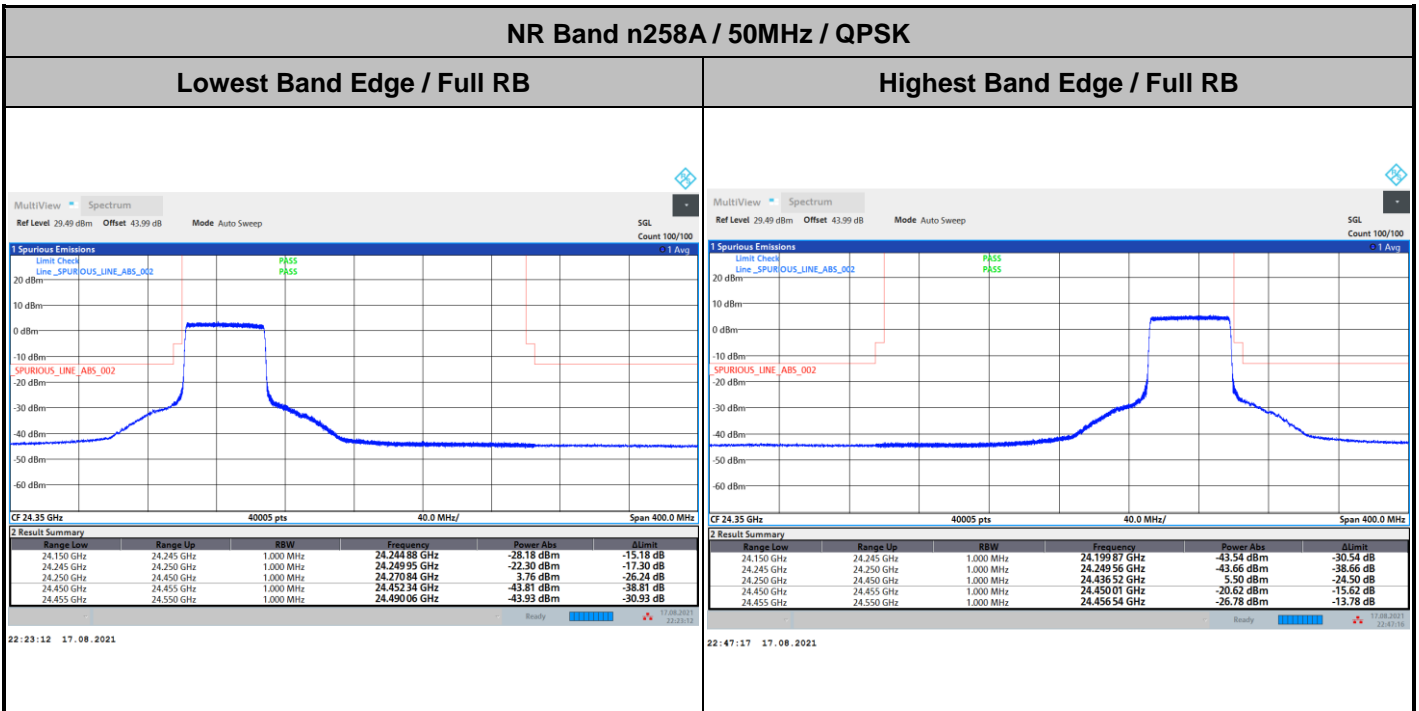




## **Spurious Emission**





Spurious emission between 18GHz to 40GHz worst case plot is reported as following.

DFT-s-OFDM Module A

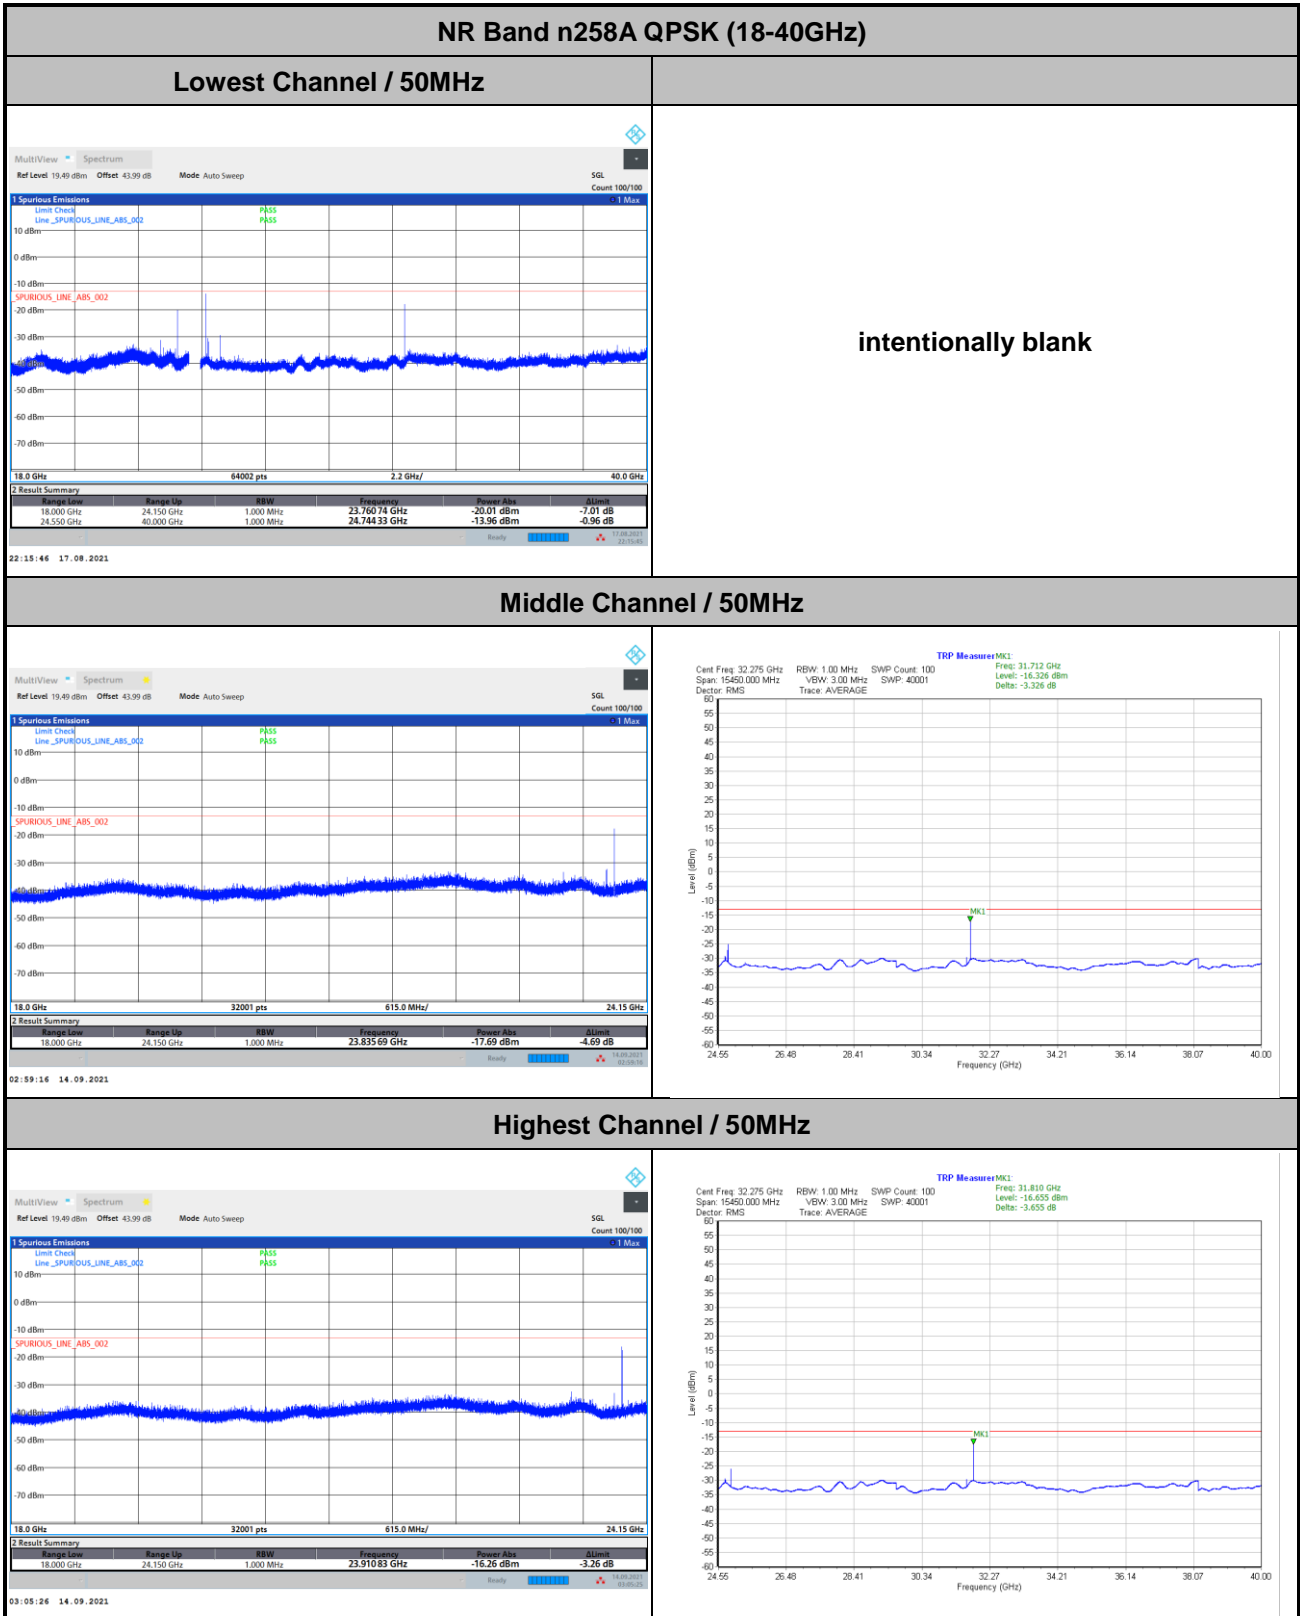


Remark: In band and out of band frequencies that has reported in previous results are omitted.



CP-OFDM Module A



NR Band n258A QPSK (18-40GHz)

Lowest Channel / 50MHz


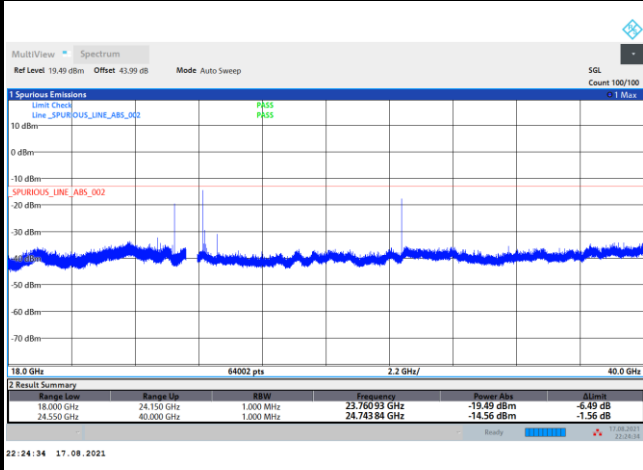


intentionally blank

Middle Channel / 50MHz

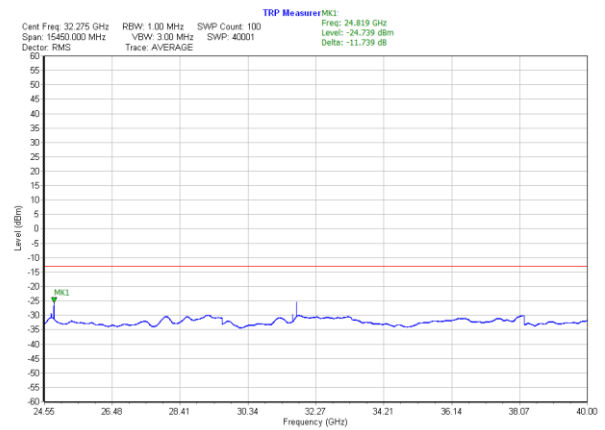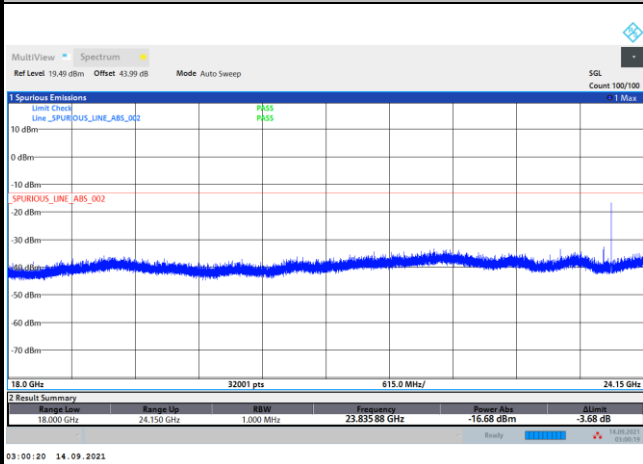

Highest Channel / 50MHz

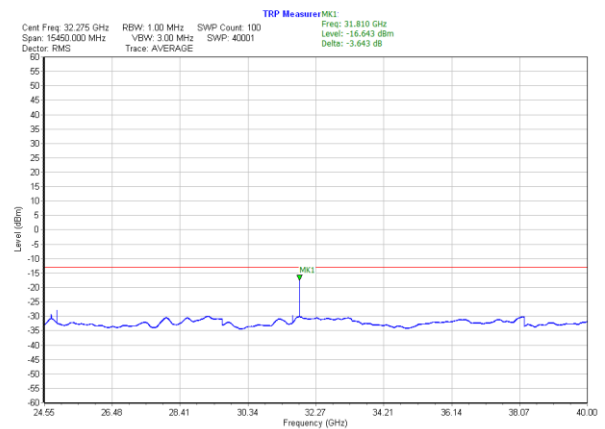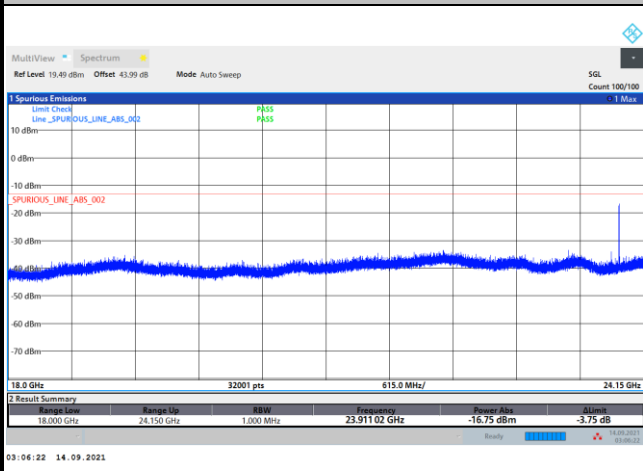

Remark: In band and out of band frequencies that has reported in previous results are omitted.



## NR Band n258A Module A Beam V

### Occupied Bandwidth

Mode	DFT-s-OFDM Module A NR Band n258A : 99%OBW(MHz)		
BW	50MHz		
Mod.	QPSK	16QAM	64QAM
Lowest CH	45.92	46.31	46.07
Middle CH	45.91	46.20	45.96
Highest CH	45.94	46.28	46.10


Mode	CP-OFDM Module A NR Band n258A : 99%OBW(MHz)
BW	50MHz
Mod.	QPSK
Lowest CH	46.72
Middle CH	46.13
Highest CH	46.17




DFT-s-OFDM Module A

NR Band n258A


Lowest Channel / 50MHz / QPSK

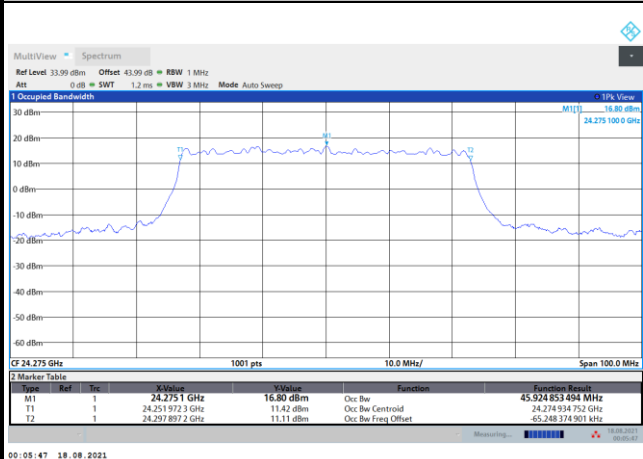


Lowest Channel / 50MHz / 16QAM

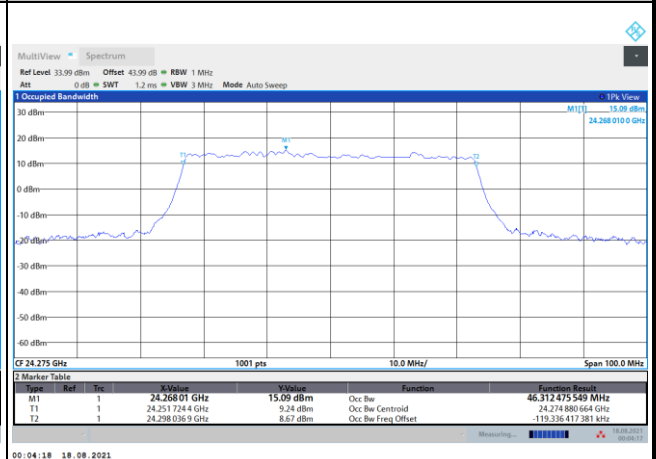


Middle Channel / 50MHz / QPSK

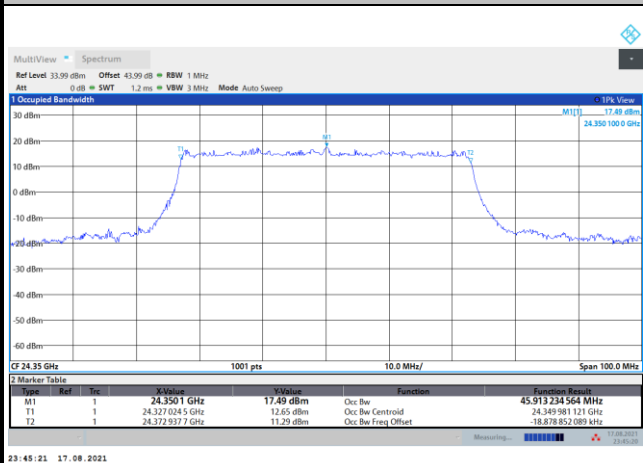


Middle Channel / 50MHz / 16QAM

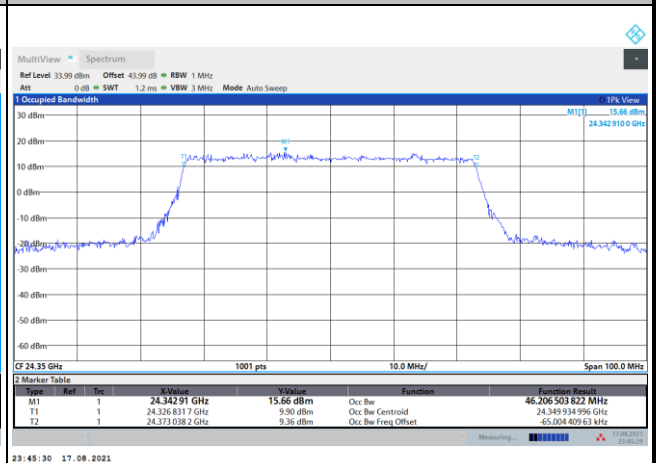

Highest Channel / 50MHz / QPSK

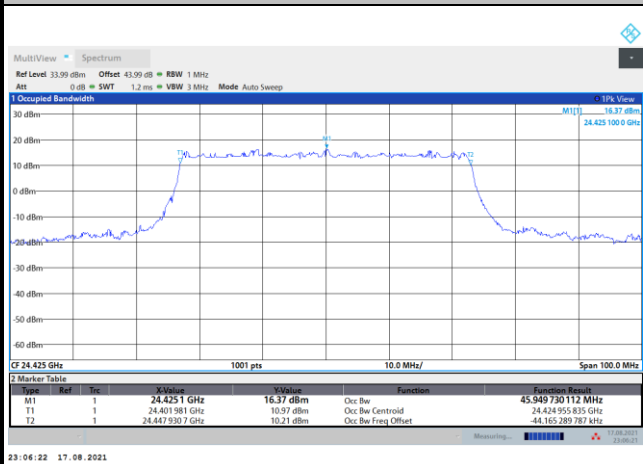

Highest Channel / 50MHz / 16QAM

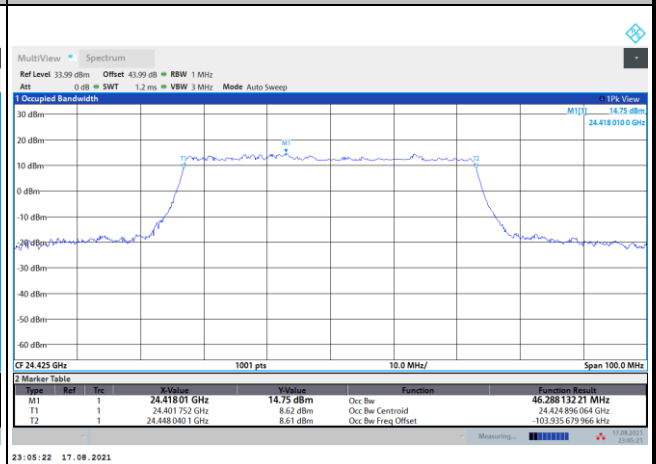




DFT-s-OFDM Module A


NR Band n258A

Lowest Channel / 50MHz / 64QAM

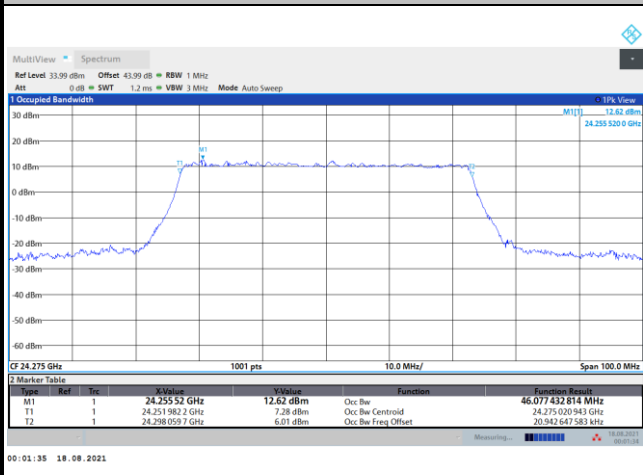


intentionally blank

Middle Channel / 50MHz / 64QAM

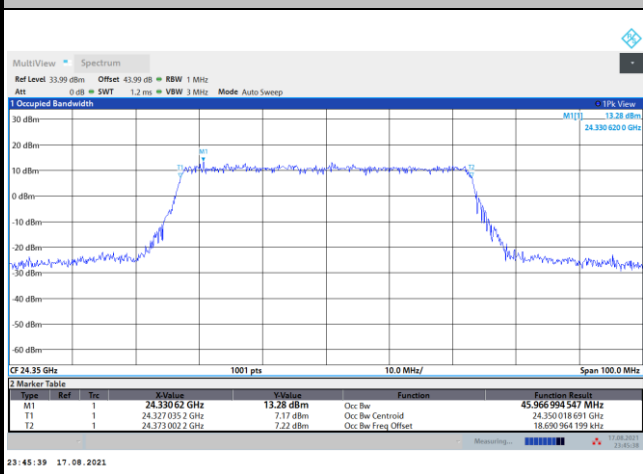

intentionally blank

Highest Channel / 50MHz / 64QAM

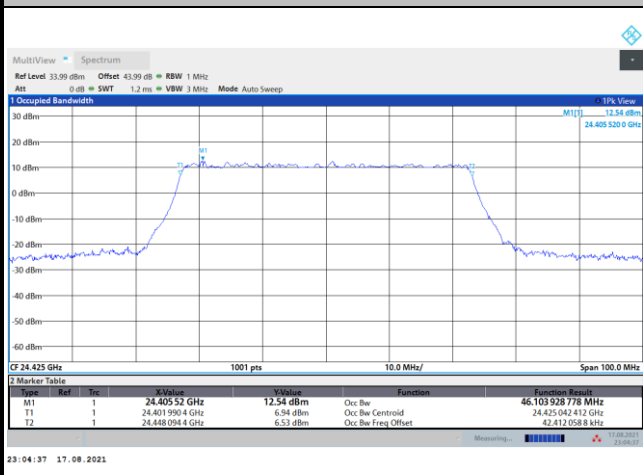


intentionally blank



CP-OFDM Module A


NR Band n258A

Lowest Channel / 50MHz / QPSK

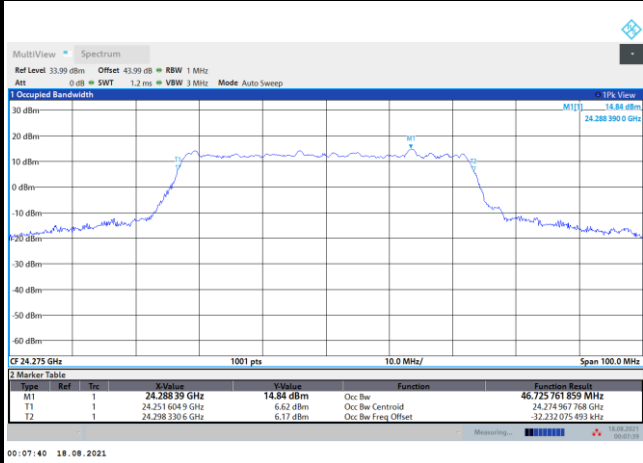


intentionally blank

Middle Channel / 50MHz / QPSK

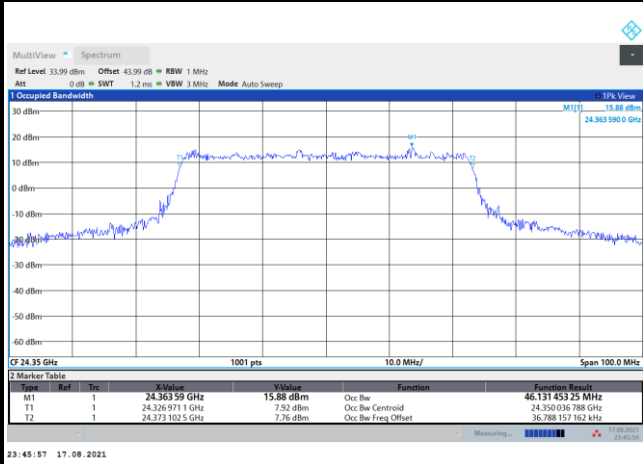

intentionally blank

Highest Channel / 50MHz / QPSK

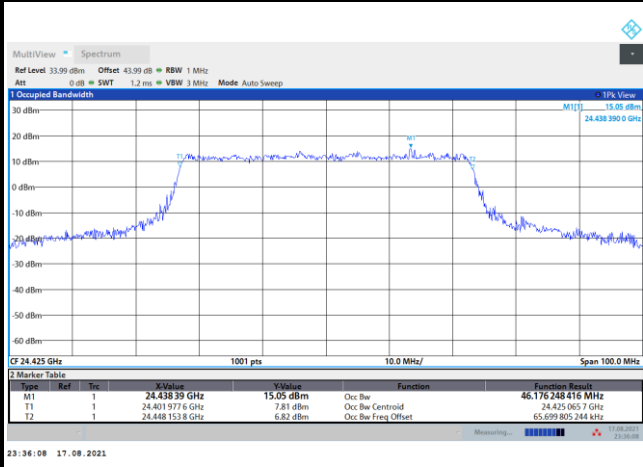

intentionally blank



### Radiated Out of Band Emissions

Mode			DFT-s-OFDM Module A NR Band n258A : BE (dBm) 1 RB		
BW			50MHz		
Limit (dBm)			QPSK	16QAM	64QAM
Low CH	0~10%OB	≤ -5	-8.80	-10.36	-12.67
	>10%OB	≤ -13	-37.93	-38.88	-40.02
HighCH	0~10%OB	≤ -5	-9.10	-11.30	-11.98
	>10%OB	≤ -13	-37.91	-39.26	-39.73
Result			Compliance		

Mode			CP-OFDM Module A NR Band n258A : BE (dBm) 1 RB		
BW			50MHz		
Limit (dBm)			QPSK		
Low CH	0~10%OB	≤ -5	-10.53		
	>10%OB	≤ -13	-38.61		
High CH	0~10%OB	≤ -5	-9.83		
	>10%OB	≤ -13	-37.85		
Result			Compliance		

Mode			DFT-s-OFDM Module A NR Band n258A : BE (dBm) Full RB		
BW			50MHz		
Limit (dBm)			QPSK	16QAM	64QAM
Low CH	0~10%OB	≤ -5	-18.74	-19.52	-21.80
	>10%OB	≤ -13	-23.75	-25.63	-30.74
HighCH	0~10%OB	≤ -5	-18.63	-20.47	-22.09
	>10%OB	≤ -13	-23.24	-26.75	-31.21
Result			Compliance		


Mode			CP-OFDM Module A NR Band n258A : BE (dBm) Full RB		
BW			50MHz		
Limit (dBm)			QPSK		
Low CH	0~10%OB	≤ -5	-19.21		
	>10%OB	≤ -13	-23.63		
High CH	0~10%OB	≤ -5	-19.81		
	>10%OB	≤ -13	-24.73		
Result			Compliance		




DFT-s-OFDM Module A

NR Band n258A / 50MHz / QPSK

Lowest Band Edge / 1 RB

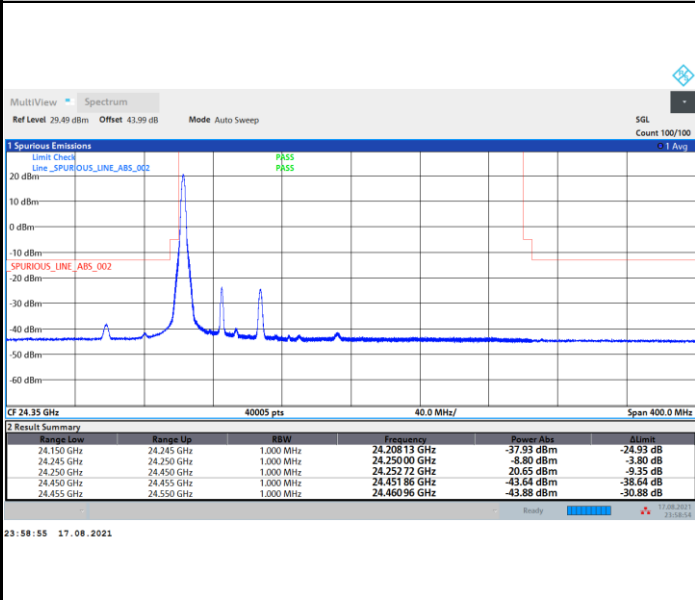


Highest Band Edge / 1 RB

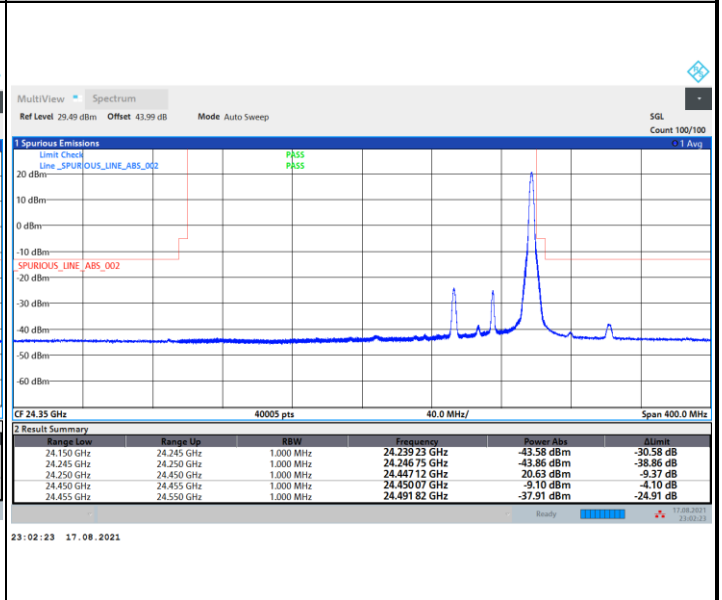


NR Band n258A / 50MHz / 16QAM

Lowest Band Edge / 1 RB

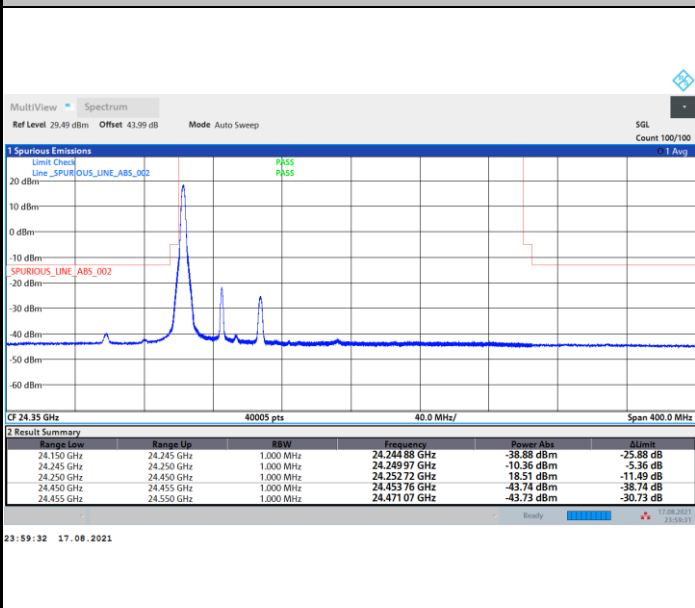


Highest Band Edge / 1 RB

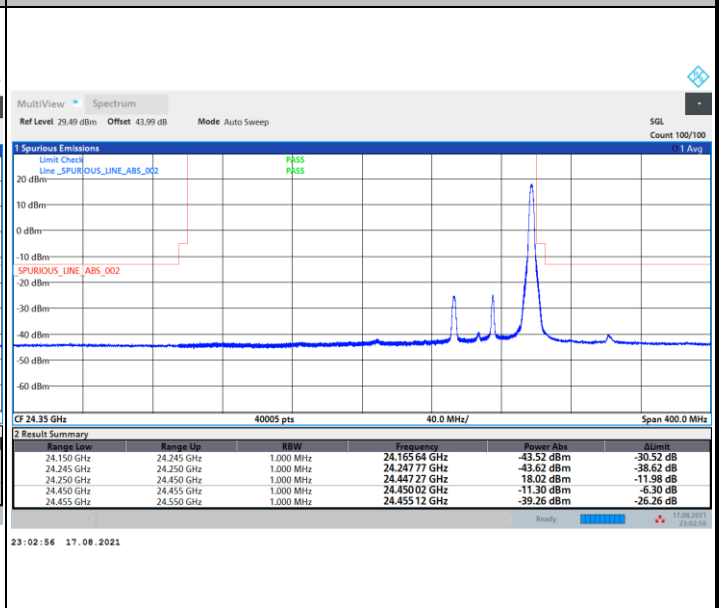






DFT-s-OFDM Module A

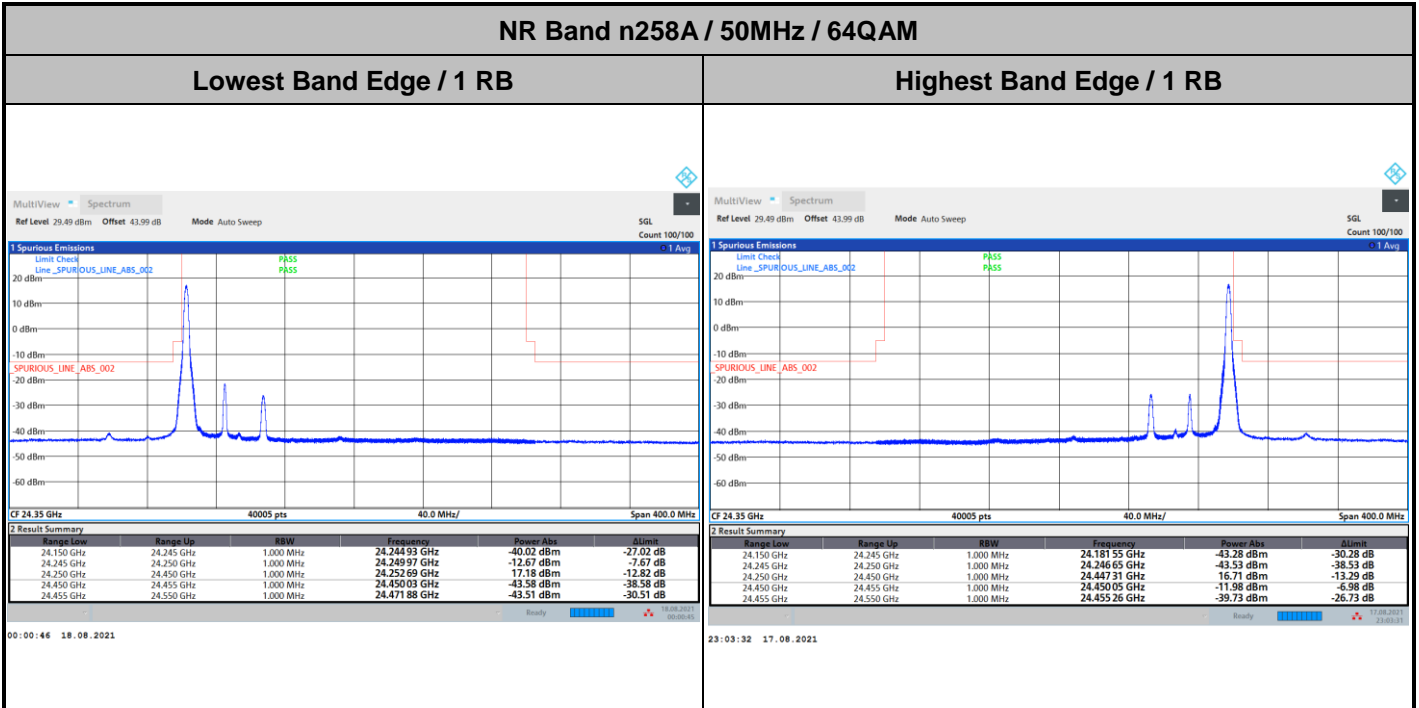

CP-OFDM Module A

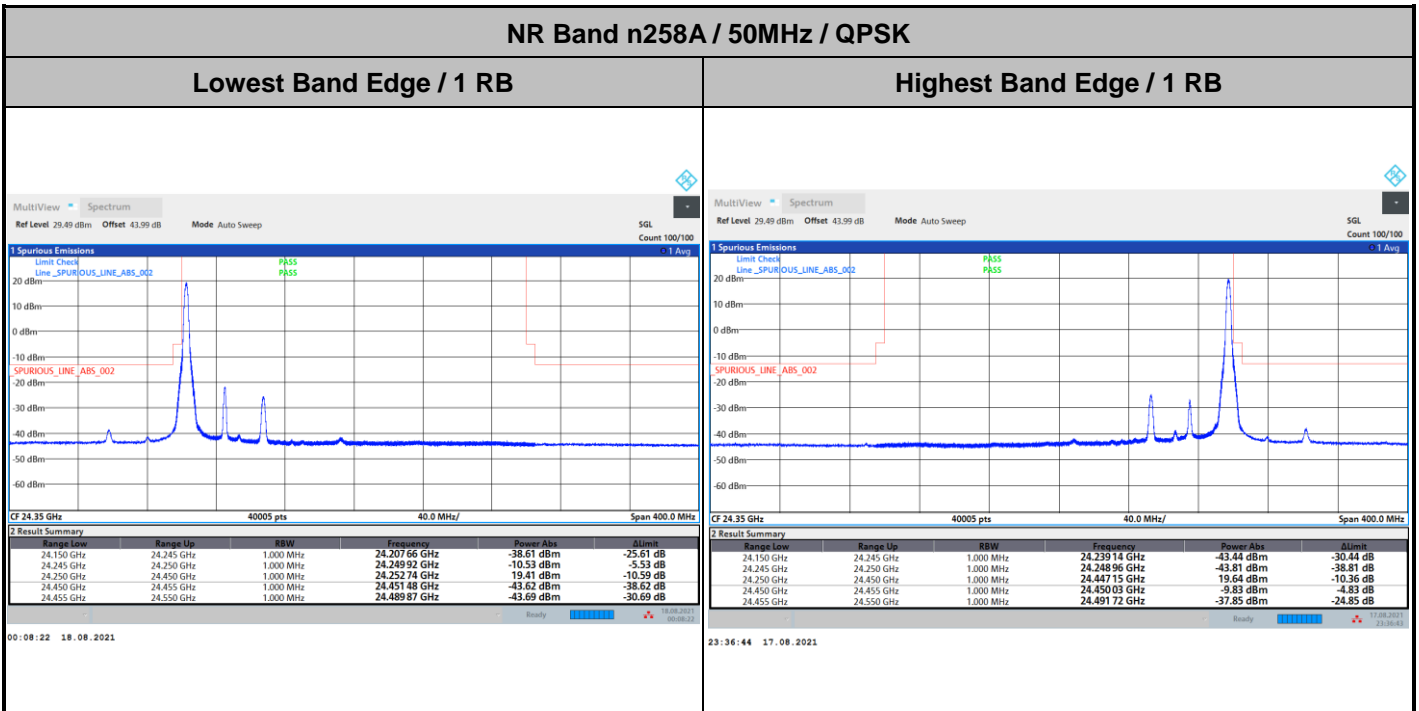





DFT-s-OFDM Module A

NR Band n258A / 50MHz / QPSK

Lowest Band Edge / Full RB

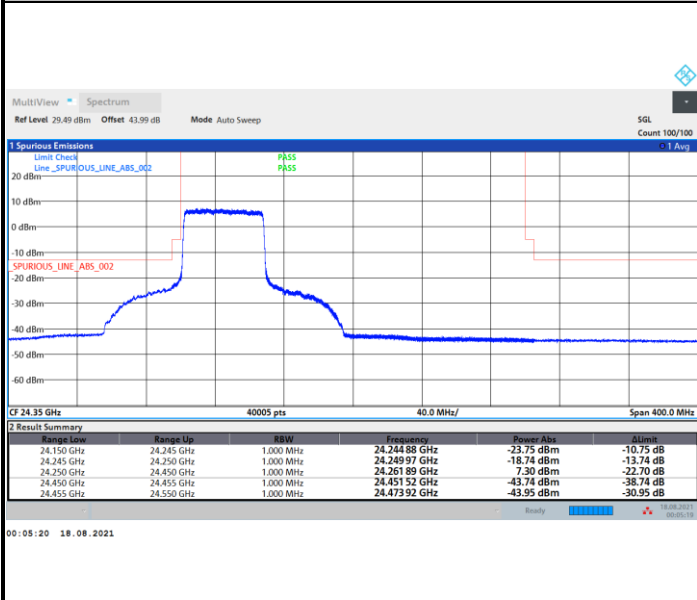


Highest Band Edge / Full RB

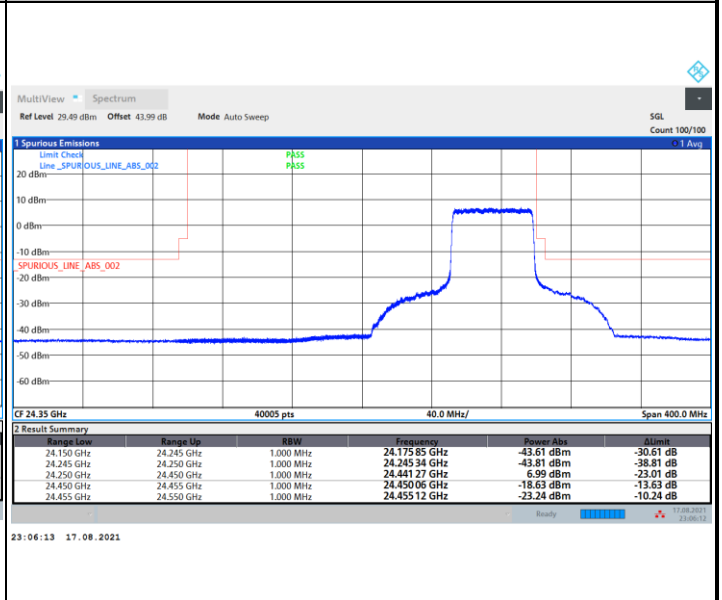


NR Band n258A / 50MHz / 16QAM

Lowest Band Edge / Full RB

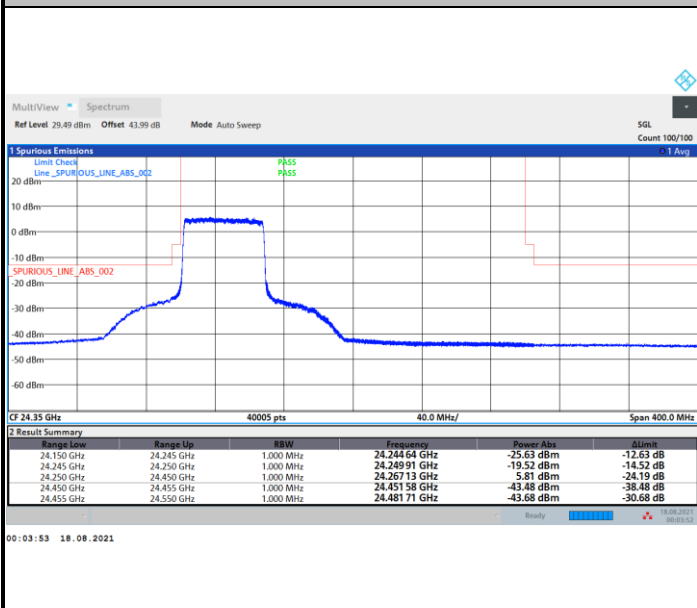


Highest Band Edge / Full RB

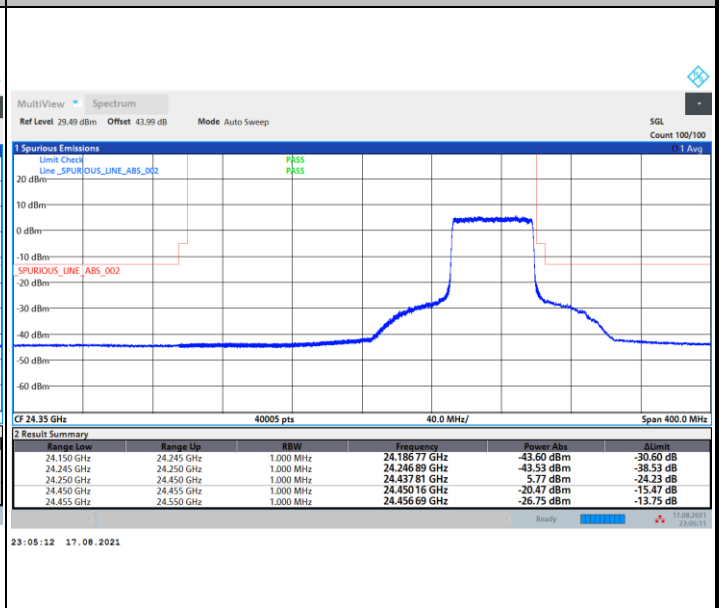




DFT-s-OFDM Module A

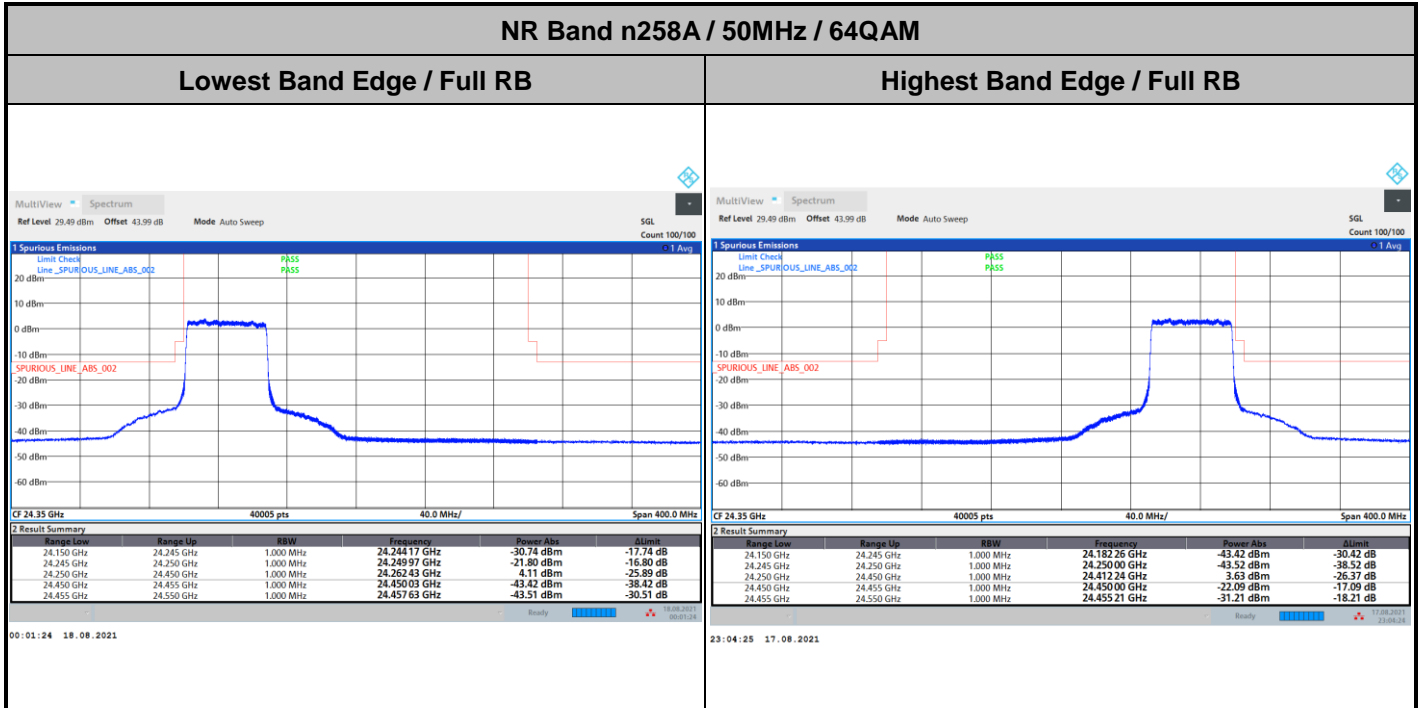

CP-OFDM Module A

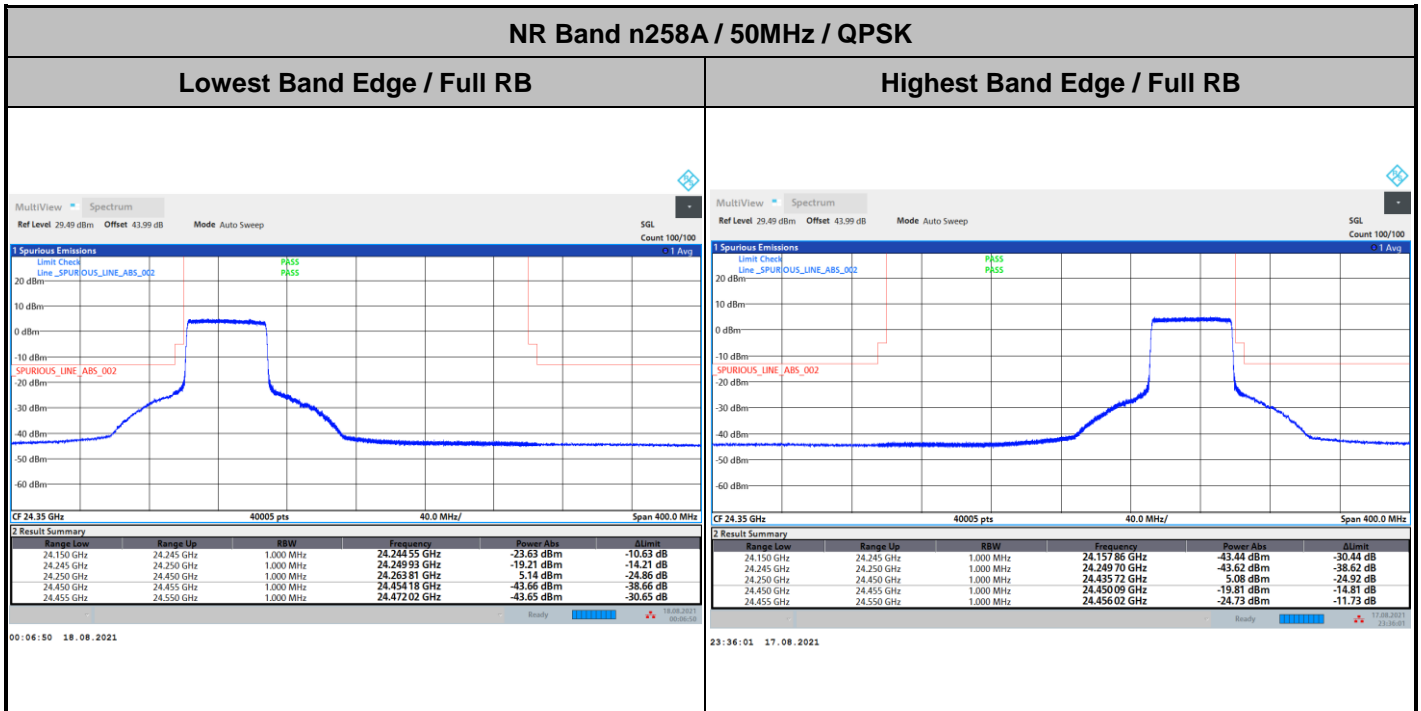



## **Spurious Emission**