

承 認 書 SPECIFICATION FOR APPROVAL

客戶名稱 CUSTOMER	:	
客户料號 CUSTOMER'S P/N	:	
料號 PART NUMBER	:	KBAN3216E245H02
規格 DESCRIPTION	:	Ceramic Antenna 3216 L Ant 2.45G Type
H02 版本 VERSION	:	V1.0
日期 ISSUE DATE	:	2020/08/21

工 程 部 R&D CENTER					
承 認 APPROVAL	確 認 CHECKED	製 作 DRAWN			
Ziv	Alex	Jerry			





萬誠科技股份有限公司

112 台北市北投區立功街 151 號 1 樓

電話: (02) 2898-2220 傳真: (02) 2898-5055

OneWave Electronic Co., Ltd.


1F, No. 151, Li Gong Street, Beitou District, Taipei City 112, Taiwan

TEL: +886 2 2898-2220 FAX: +886 2 2898-5055



3216 Ceramic Antenna

For Bluetooth / WLAN Applications

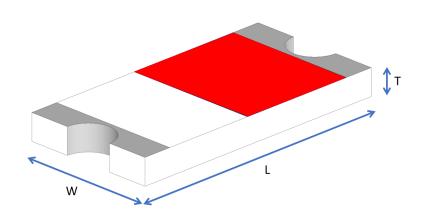

P/N: KBAN3216E245H02

	Dimension (mm)
L	3.23 ± 0.20
W	1.66 ± 0.20
Т	0.45 ± 0.20



Part Number Information

KBAN 3216 E 245 H 02
A B C D E F

A	Product Series	Antenna	
В	Dimension L x W	3.2 x 1.6mm (±0.2mm)	
C	Material	High K material	
D	Working Frequency	2.4 ~ 2.5GHz	
E	Feeding mode	PIFA & Single Feeding	
F	Antenna type	Type = 02	


1. Electrical Specification

Specification			
Part Number	KBAN3216E245H02		
Central Frequency	2450	MHz	
Bandwidth	120 (Min.)	MHz	
Return Loss	-6.5 (Max)	dB	
Peak Gain	1.71	dBi	
Impedance	50	Ohm	
Operating Temperature	-40~+110	$^{\circ}$ C	
Maximum Power	4	W	
Resistance to Soldering Heats	10 (@ 260°C)	sec.	
Polarization	Linear		
Azimuth Beamwidth	Omni-directional		
Termination	Ni / Au (Leadless)		


Remark : Bandwidth & Peak Gain was measured under evaluation board of next page




2. Recommended PCB Pattern Evaluation Board Dimension

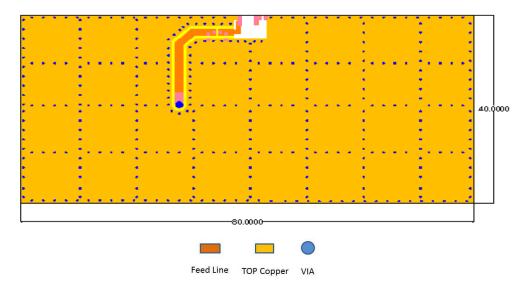

2nd Evaluation Board Dimension

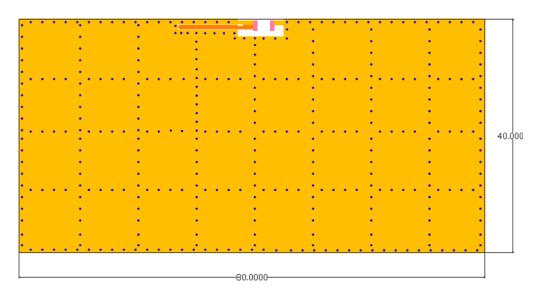


Suggested Matching Circuit







Layout Dimensions in Clearance area(Size=5.9*5.0mm)

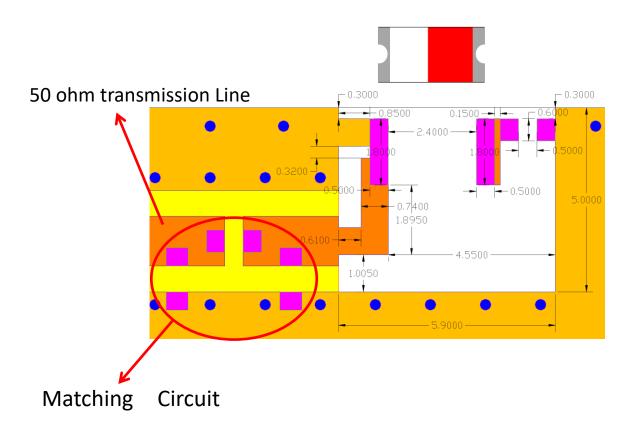

FootPrint (Unit:mm)

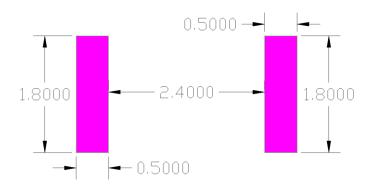


◆ 2nd Layout Dimensions in Clearance area(size=8.0*3.0mm)

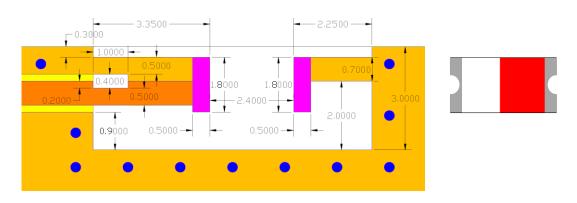




3. Measurement Results Return Loss

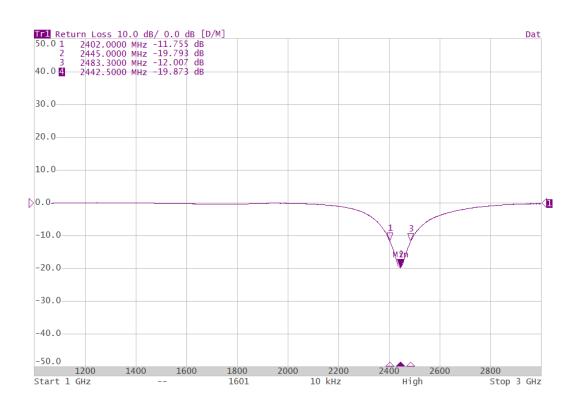




Radiation Pattern

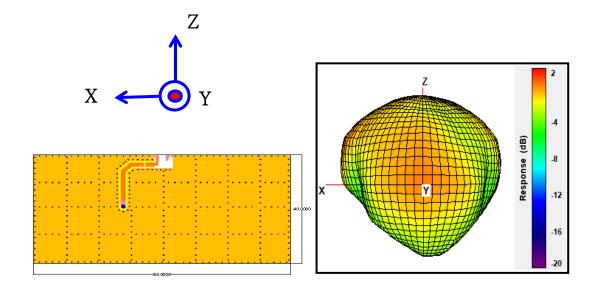

	Efficiency	Peak Gain	Directivity
2400MHz	77.26 %	1.63 dBi	2.75 dBi
2450MHz	79.88 %	1.71 dBi	2.68 dBi
2500MHz	77.98 %	1.67 dBi	2.75 dBi

Chamber Coordinate System

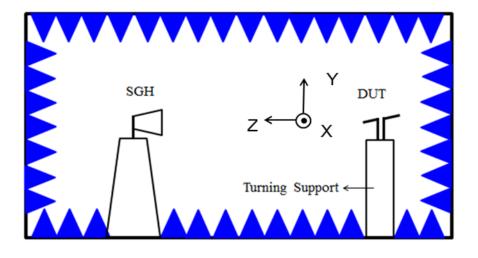




4.Reliability and Test Condictions


ITEM	REQUIREMENTS	TEST CONDITION		
Solderability	Wetting shall exceed 90% coverage No visible mechanical damage	Pre-heating temperature:150 $^{\circ}$ C/60sec. Solder temperature:230 $^{\pm}$ 5 $^{\circ}$ C		
	TEMP (℃)	Duration:4±1sec. Solder:Sn-Ag3.0-Cu0.5		
	230°C 4±1 sec.	Flux for lead free: rosin		
	150°C			
	60sec			
Solder heat Resistance	No visible mechanical damage Central Freq. change :within ± 6%	Pre-heating temperature:150°C/60sec. Solder temperature:260±5°C		
	TEMP (℃)	Duration:10±0.5sec. Solder:Sn-Ag3.0-Cu0.5		
	260°C 10±0.5 sec.	Flux for lead free: rosin		
	150°C			
Component Adhesion (Push test)	No visible mechanical damage	The device should be reflow soldered(230±5℃ for 10sec.) to a tinned copper substrate A dynometer force gauge should be applied the side of the component. The device must with-ST-F 0.5 Kg without failure of the termination		
Component	No visible mechanical damage	attached to component. Insert 10cm wire into the remaining open		
Adhesion		eye bend ,the ends of even wire lengths		
(Pull test)		upward and wind together. Terminal shall not be remarkably damaged.		
Thermal shock	No visible mechanical damage	+110°C =>30±3min -40°C =>30±3min		
	2. Central Freq. change :within ±6%	Test cycle:10 cycles		
	Phase Temperature(°C) Time(min) 1 +110±5°C 30+3	The chip shall be stabilized at normal		
	1 +110±5°C 30±3 2 Room Within	condition for 2~3 hours before measuring.		
	Temperature 3sec	Jane 3		
	3 -40±2°C 30±3 4 Room Within			
	4 Room Within Temperature 3sec			
Resistance to	No visible mechanical damage	Temperature: +110±5°C Duration: 1000±12hrs		
High Temperature	2. Central Freq. change :within ±6%	The chip shall be stabilized at normal		
·	3. No disconnection or short circuit.	condition for 2~3 hours before		
Resistance to	No visible mechanical damage	measuring. Temperature:-40±5°ℂ		
Low	2. Central Freq. change :within ±6%	Duration: 1000±12hrs		
Temperature	3. No disconnection or short circuit.	The chip shall be stabilized at normal condition for 2~3 hours before measuring.		
Humidity	No visible mechanical damage	Temperature: 40±2°C		
•	2. Central Freq. change :within ±6%	Humidity: 90% to 95% RH		
	3. No disconnection or short circuit.	Duration: 1000±12hrs The chip shall be stabilized at normal		
		condition for 2~3 hours before measuring.		



5. Soldering and Mounting

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.



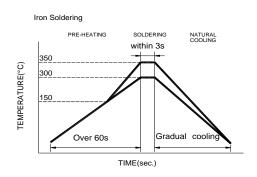

Recommended temperature profiles for re-flow soldering in Figure 1.


Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.


- Preheat circuit and products to 150°C
- · Never contact the ceramic with the iron tip
- Use a 20 watt soldering iron with tip diameter of 1.0mm
- 280°C tip temperature (max)
- 1.0mm tip diameter (max)
- · Limit soldering time to 3 sec.




6.Packaging Information

Tape Specification:

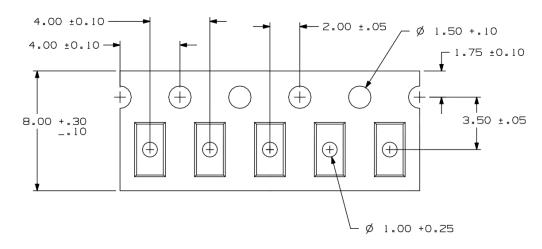

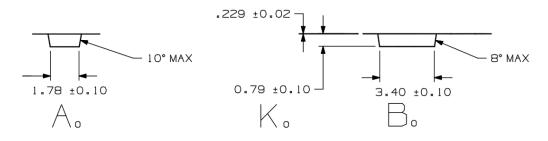

Reel Specification: (7", Ф180 mm)

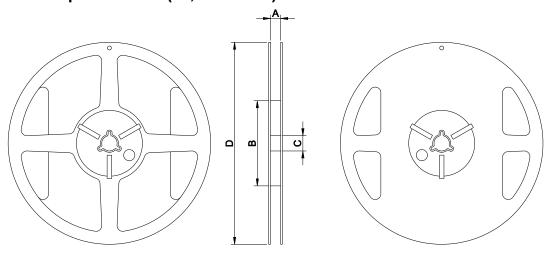

7" x 8 mm

Tape Width(mm)	A(mm)	B(mm)	C(mm)	D(mm)	Chip/Reel(pcs)
8	9.0±0.5	60±2	13.5±0.5	178±2	3000



7. Storage and Transportation Information

Storage Conditions

To maintain the solderability of terminal electrodes:

- 1. Temperature and humidity conditions: -10~ 40°C and 30~70% RH.
- 2. Recommended products should be used within 6 months from the time of delivery.
- 3. The packaging material should be kept where no chlorine or sulfur exists in the air.

Transportation Conditions

- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
- 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.