



Prüfbericht-Nr.: <i>Test report no.:</i>	CN23MIDW 001	Auftrags-Nr.: <i>Order no.:</i>	48222869	Seite 1 von 256 Page 1 of 256
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2023-08-17	
Auftraggeber: <i>Client:</i>	EnGenius Technologies 1580 Scenic Ave, Costa Mesa, CA 92626, USA			
Prüfgegenstand: <i>Test item:</i>	Outdoor6 2x2 CPE			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	EOC655, EOC655-C18, EOC655-C23 and EOC655-B18			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15E Test report (WiFi 5GHz)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart E Section 15.407			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2023-08-01			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003541866-006 A003541866-008			
Prüfzeitraum: <i>Testing period:</i>	2023-09-15 - 2023-12-06			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Taipei Testing Site			
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
überprüft von: <i>compiled by:</i>	 Ethan Shao	genehmigt von: <i>authorized by:</i>	 Brenda Chen	
Datum: <i>Date:</i>	2023-12-20	Ausstellungsdatum: <i>Issue date:</i>	2023-12-20	
Stellung / Position:	Assistant Project Engineer	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

Prüfbericht-Nr.:
Test report no.:

CN23MIDW 001

Seite 2 von 256
Page 2 of 256

Anmerkungen
Remarks

1	<p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>
2	<p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p>
3	<p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>
4	<p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.407(a) & 15.203	Antenna Requirement	Pass
5.1.2	15.407(a)	Maximum Conducted Output Power	Pass
5.1.3	15.407(h)(1)	Transmit Power Control (TPC)	Pass
5.1.4	15.407(a)	26 dB Bandwidth	Pass
5.1.4	2.1049	99% Occupied Bandwidth	Pass
5.1.5	15.407(e)	6 dB Bandwidth (U-NII-3 Band only)	Pass
5.1.6	15.407(g)	Frequency Stability	Pass
5.1.7	15.407(a)	Power Spectral Density	Pass
5.1.8	15.407(b) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.1.9	15.407(h) & KDB 905462 D02	Dynamic Frequency Selection	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	6
1. GENERAL REMARKS	7
1.1 COMPLEMENTARY MATERIALS.....	7
1.2 DECISION RULE OF CONFORMITY	7
2. TEST SITES	8
2.1 TEST LABORATORY	8
2.2 TEST FACILITY.....	8
2.3 TRACEABILITY	9
2.4 CALIBRATION	9
2.5 MEASUREMENT UNCERTAINTY	9
3. GENERAL PRODUCT INFORMATION.....	10
3.1 PRODUCT FUNCTION AND INTENDED USE	10
3.2 SYSTEM DETAILS AND RATINGS.....	10
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	13
3.4 SUBMITTED DOCUMENTS.....	13
4. TEST SET-UP AND OPERATION MODES.....	14
4.1 PRINCIPLE OF CONFIGURATION SELECTION	14
4.2 CARRIER FREQUENCY AND CHANNEL.....	15
4.3 TEST OPERATION AND TEST SOFTWARE.....	16
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	19
4.5 TEST SETUP DIAGRAM	19
4.6 DUTY CYCLE OF TEST SIGNAL	21
5. TEST RESULTS	23
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	23
5.1.1 <i>Antenna Requirement</i>	<i>23</i>
5.1.2 <i>Maximum Conducted Output Power</i>	<i>24</i>
5.1.3 <i>Transmit Power Control (TPC).....</i>	<i>60</i>
5.1.4 <i>26 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>61</i>
5.1.5 <i>6 dB Bandwidth (5725-5850MHz).....</i>	<i>62</i>
5.1.6 <i>Frequency Stability Measurement.....</i>	<i>63</i>
5.1.7 <i>Power Spectral Density.....</i>	<i>65</i>
5.1.8 <i>Radiated Spurious Emissions</i>	<i>67</i>
5.1.9 <i>Dynamic Frequency Selection</i>	<i>72</i>
5.2 MAINS EMISSION	255
5.2.1 <i>Mains Conducted Emission.....</i>	<i>255</i>

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.

Seite 5 von 256
Page 5 of 256

APPENDIX A - TEST RESULT OF CONDUCTED_SPRUCE PANEL ANTENNA

APPENDIX B - TEST RESULT OF CONDUCTED_SPRUCE OMNI ANTENNA

APPENDIX C - TEST RESULT OF CONDUCTED_PINE SECTOR ANTENNA

APPENDIX D - TEST RESULT OF CONDUCTED_PINE DISH ANTENNA

APPENDIX E - TEST RESULT OF CONDUCTED_PINE OMNI ANTENNA

**APPENDIX F - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED
EMISSION_SPRUCE PANEL ANTENNA**

**APPENDIX G - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED
EMISSION_SPRUCE OMNI ANTENNA**

**APPENDIX H - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED
EMISSION_PINE SECTOR ANTENNA**

**APPENDIX I - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION_PINE
DISH ANTENNA**

**APPENDIX J - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED
EMISSION_PINE OMNI ANTENNA**

APPENDIX K - DYNAMIC FREQUENCY SELECTION RADAR TEST WAVEFORM

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.

Seite 6 von 256
Page 6 of 256

HISTORY OF THIS TEST REPORT

Revision	Description	Date Issued
R01	Original Release	2023-12-20

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted_Spruce Panel antenna

Appendix B - Test Result of Conducted_Spruce Omni antenna

Appendix C - Test Result of Conducted_PINE Sector antenna

Appendix D - Test Result of Conducted_PINE Dish antenna

Appendix E - Test Result of Conducted_PINE Omni antenna

Appendix F - Test Result of Radiated Emissions & Mains Conducted Emission_Spruce Panel antenna

Appendix G - Test Result of Radiated Emissions & Mains Conducted Emission_Spruce Omni antenna

Appendix H - Test Result of Radiated Emissions & Mains Conducted Emission_PINE Sector antenna

Appendix I - Test Result of Radiated Emissions & Mains Conducted Emission_PINE Dish antenna

Appendix J - Test Result of Radiated Emissions & Mains Conducted Emission_PINE Omni antenna

Appendix K - Dynamic Frequency Selection Radar Test Waveform

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart E Section 15.407
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
KDB 662911 D01 Multiple Transmitter Output v02r01

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 180491
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.30 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.30 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.54 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.52 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a Outdoor6 2x2 CPE. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	Outdoor6 2x2 CPE
Type Identification	EOC655, EOC655-C18, EOC655-C23 and EOC655-B18
FCC ID	A8J-EOC655

Technical Specification of EUT

Item	EUT information
Operating Frequency	Band 1: 5180 MHz ~ 5250 MHz Band 2: 5250 MHz ~ 5320 MHz Band 3: 5500 MHz ~ 5700 MHz Band 4: 5745 MHz ~ 5825 MHz
Channel Number	<5180 MHz ~ 5320 MHz> 8 for 802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20 4 for 802.11n HT40, 802.11ac VHT40, 802.11ax HE40 2 for 802.11ac VHT80, 802.11ax HE80 1 for 802.11ac VHT160, 802.11ax HE160 <5500 MHz ~ 5700 MHz> 11 for 802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20 5 for 802.11n HT40, 802.11ac VHT40, 802.11ax HE40 2 for 802.11ac VHT80, 802.11ax HE80 1 for 802.11ac VHT160, 802.11ax HE160 <5745 MHz ~ 5825 MHz> 5 for 802.11a, 802.11n HT20, 802.11ac VHT20, 802.11ax HE20 2 802.11n HT40, 802.11ac VHT40, 802.11ax HE40 1 for 802.11ac VHT80, 802.11ax HE80
Data Rate	802.11a: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7 802.11ac: up to MCS9 802.11ax: up to MCS11
Operation Voltage	48 Vdc
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) OFDMA (1024QAM)

Item	EUT information		
Maximum Output Power (mW)	Spruce_ Panel antenna	CDD	5180 ~ 5240 MHz: 17.98 5260 ~ 5320 MHz: 4.94 5500 ~ 5720 MHz: 4.87 5745 ~ 5825 MHz: 150.86
		Beamforming	5180 ~ 5240 MHz: 8.99 5260 ~ 5320 MHz: 2.47 5500 ~ 5720 MHz: 2.44 5745 ~ 5825 MHz: 75.44
	Spruce_ Omni antenna	CDD	5180 ~ 5240 MHz: 17.98 5260 ~ 5320 MHz: 4.94 5500 ~ 5720 MHz: 4.87 5745 ~ 5825 MHz: 150.86
		Beamforming	5180 ~ 5240 MHz: 8.99 5260 ~ 5320 MHz: 2.47 5500 ~ 5720 MHz: 2.44 5745 ~ 5825 MHz: 75.44
	PINE_ Sector antenna	CDD	5180 ~ 5240 MHz: 40.79 5260 ~ 5320 MHz: 14.92 5500 ~ 5720 MHz: 15.61 5745 ~ 5825 MHz: 62.55
		Beamforming	5180 ~ 5240 MHz: 20.41 5260 ~ 5320 MHz: 7.46 5500 ~ 5720 MHz: 7.81 5745 ~ 5825 MHz: 31.14
	PINE_ Dish antenna	CDD	5180 ~ 5240 MHz: 69.97 5260 ~ 5320 MHz: 0.92 5500 ~ 5720 MHz: 0.99 5745 ~ 5825 MHz: 146.56
		Beamforming	5180 ~ 5240 MHz: 34.99 5260 ~ 5320 MHz: 0.46 5500 ~ 5720 MHz: 0.50 5745 ~ 5825 MHz: 73.28
	PINE_ Omni antenna	CDD	5180 ~ 5240 MHz: 123.81 5260 ~ 5320 MHz: 93.60 5500 ~ 5720 MHz: 96.06 5745 ~ 5825 MHz: 395.33
		Beamforming	5180 ~ 5240 MHz: 61.91 5260 ~ 5320 MHz: 46.80 5500 ~ 5720 MHz: 48.03 5745 ~ 5825 MHz: 196.91

Item	EUT information			
Maximum EIRP (mW)	Spruce_ Panel antenna	CDD	5260 ~ 5320 MHz: 988.55 5500 ~ 5720 MHz: 972.75	
		Beamforming	5260 ~ 5320 MHz: 988.55 5500 ~ 5720 MHz: 972.75	
	Spruce_ Omni antenna	CDD	5260 ~ 5320 MHz: 49.55 5500 ~ 5720 MHz: 48.75	
		Beamforming	5260 ~ 5320 MHz: 49.55 5500 ~ 5720 MHz: 48.75	
	PINE_ Sector antenna	CDD	5260 ~ 5320 MHz: 941.89 5500 ~ 5720 MHz: 986.28	
		Beamforming	5260 ~ 5320 MHz: 941.89 5500 ~ 5720 MHz: 986.28	
	PINE_ Dish antenna	CDD	5260 ~ 5320 MHz: 918.33 5500 ~ 5720 MHz: 990.83	
		Beamforming	5260 ~ 5320 MHz: 918.33 5500 ~ 5720 MHz: 990.83	
	PINE_ Omni antenna	CDD	5260 ~ 5320 MHz: 935.41 5500 ~ 5720 MHz: 961.61	
		Beamforming	5260 ~ 5320 MHz: 935.41 5500 ~ 5720 MHz: 961.61	
	DFS Mode	Master		
	Antenna Information	Refer to 5.1.1		
Accessory Device	Refer to 4.4			

Note:

1. All models are listed as below.

Main Model (Tested Model)	Series Model	Difference
EOC655	EOC655-C23	All models use the same main board, but different types of 5G antennas. Please see the chart as below.
	EOC655-C18	
	EOC655-B18	

Model	Bluetooth	2.4GHz	5GHz	
			Spruce	PINE
EOC655	PIFA	Ant 1: PIFA Ant 2: Dipole	1. 23 dBi N-type panel ant. (MT465039/NVH)	1. Sector 18 dBi ant. (MT055S17VHN)
EOC655-C23			2. Omni 10 dBi ant. (DFS) (MT463036/NVH)	
EOC655-C18			23 dBi MMCX panel ant. (MT-465039/CVH/F)	
EOC655-B18			18 dBi Embedded panel ant. (C18, same antenna type as 23 dBi ant.)	2. 2 foot 30 dBi Dish ant. (TM55L-DPDISH-30)
			23 dBi N-type panel ant. (MT465039/NVH)	3. Omni 10 dBi ant. (MT-463036/NVH)
				Sector 18 dBi ant. (MT055S17VHN)

* Only the main model is chosen for the final tests.

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

4.2 Carrier Frequency and Channel

Channel	Frequency (MHz)	802.11a 802.11n HT20 802.11ac VHT20 802.11ax HE20	802.11n HT40 802.11ac VHT40 802.11ax HE40	802.11ac VHT80 802.11ax HE80	802.11ac VHT160 802.11ax HE160
36	5180	V			
38	5190		V		
40	5200	V			
42	5210			V	
44	5220	V			
46	5230		V		
48	5240	V			
50	5250				V
52	5260	V			
54	5270		V		
56	5280	V			
58	5290			V	
60	5300	V			
62	5310		V		
64	5320	V			
100	5500	V			
102	5510		V		
104	5520	V			
106	5530			V	
108	5540	V			
110	5550		V		
112	5560	V			
114	5570				V
116	5580	V			
118	5590		V		
120	5600	V			
122	5610			V	
124	5620	V			
126	5630		V		
128	5640	V			
132	5660	V			
134	5670		V		
136	5680	V			
140	5700	V			
149	5745	V			
151	5755		V		
153	5765	V			
155	5775			V	
157	5785	V			
159	5795		V		
161	5805	V			
165	5825	V			

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with LAN interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	QSPR 5.0-00197
---------------	----------------

The samples were used as follows:

A003541866-006

A003541866-008

Full test was applied on all test modes, but only worst case was shown.

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers.

Modulation Mode	Tx Function
802.11a	2TX (MIMO)
802.11n HT20	2TX (MIMO)
802.11n HT40	2TX (MIMO)
802.11ac VHT20	2TX (MIMO)
802.11ac VHT40	2TX (MIMO)
802.11ac VHT80	2TX (MIMO)
802.11ac VHT160	2TX (MIMO)
802.11ax HE20	2TX (MIMO)
802.11ax HE40	2TX (MIMO)
802.11ax HE80	2TX (MIMO)
802.11ax HE160	2TX (MIMO)

* The modulation and bandwidth are similar for 802.11n mode HT20/HT40 and 802.11ac mode VHT20/VHT40/VHT80/VHT160 and 802.11ax mode HE20/HE40/HE80/HE160, therefore investigated worse case as representative mode in test report.

** For Beamforming mode, only the output power is evaluated and presented in this report.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement
 Pre-Scan full test was applied on all test modes, but only worst case was shown.

 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5250	36 to 48	36, 40, 48	6.0
-		5250-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT20 (Power only)	5180-5250	36 to 48	36, 40, 48	MCS0
-		5250-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT40 (Power only)	5180-5250	38 to 46	38, 46	MCS0
-		5250-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT20 (Power only)	5180-5250	36 to 48	36, 40, 48	NSS1 MCS0
-		5250-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11ac VHT40 (Power only)	5180-5250	38 to 46	38, 46	NSS1 MCS0
-		5250-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT80 (Power only)	5180-5250	42	42	NSS1 MCS0
-		5250-5320	58	58	
-		5500-5700	106 to 122	106, 122	
-		5745-5825	155	155	
-	802.11ac VHT160 (Power only)	5180-5320	50	50	NSS1 MCS0
-		5500-5700	114	114	
-	802.11ax HE20	5180-5250	36 to 48	36, 40, 48	NSS1 MCS0
-		5250-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11ax HE40	5180-5250	38 to 46	38, 46	NSS1 MCS0
-		5250-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ax HE80	5180-5250	42	42	NSS1 MCS0
-		5250-5320	58	58	
-		5500-5700	106 to 122	106, 122	
-		5745-5825	155	155	
-	802.11ax HE160	5180-5320	50	50	NSS1 MCS0
-		5500-5700	114	114	

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 18 von 256
 Page 18 of 256

Radiated Spurious Emissions (Above 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5250	36 to 48	36, 40, 48	6.0
-		5250-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11ax HE20	5180-5250	36 to 48	36, 40, 48	NSS1 MCS0
-		5250-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11ax HE40	5180-5250	38 to 46	38, 46	NSS1 MCS0
-		5250-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ax HE80	5180-5250	42	42	NSS1 MCS0
-		5250-5320	58	58	
-		5500-5700	106 to 122	106, 122	
-		5745-5825	155	155	
-	802.11ax HE160	5180-5320	50	50	NSS1 MCS0
-		5500-5700	114	114	

Radiated Spurious Emissions (Below 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Description
-	WiFi 5G 802.11a_5180MHz + WiFi 5G 802.11a_5260MHz + WiFi 2.4G 802.11ax HE40_2422MHz + Bluetooth LE 1Mbps_2440MHz

Mains Conducted Emission Test

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
 Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Description
-	WiFi 5G 802.11a_5180MHz + WiFi 5G 802.11a_5260MHz + WiFi 2.4G 802.11ax HE40_2422MHz + Bluetooth LE 1Mbps_2440MHz

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	22.4-24.5 °C	58-75 %	Nick Guan / Andy Chen
Radiated Spurious Emissions above 1 GHz	23.6-25.2 °C	57-59 %	Ivan Chiang
Radiated Spurious Emissions below 1 GHz	23.6-25.2 °C	57-59 %	Ivan Chiang
Mains Conducted Emission	19.1-25.9 °C	50.2-58.9 %	Roger Liao

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


No.	Product	Brand	Model	Description
A	AC Power cord	Keywest	K01031B3180BB	--
B	POE adapter	Foshan Great Power	GRT-480100A	I/P: 100-240 Vac, 2000 mA O/P: 48 Vdc, 1000 mA
C	Ethernet cable	Keywest	KWN-CBL-E01	--

Support Unit


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
Radiated Emissions								
D	RF Cable	Emplus	LMR 400-01	N/A	N/A	NO	189	--
E	RF Cable	Emplus	LMR 400-02	N/A	N/A	NO	189	--
H	RF Cable	Emplus	LMR 400-03	N/A	N/A	NO	189	--
I	RF Cable	Emplus	LMR 400-04	N/A	N/A	NO	189	--
J	Grounding wire	Keywest	N/A	N/A	N/A	NO	180	--
1	Notebook	HP	15s-du0007TX	CND93662VF	-	-	-	--
2	Ethernet cable	TUV	TUV-01	YES	N/A	NO	1000	--
F	Antenna	Pine	Sector 18 dBi	N/A	-	-	-	Spruce Panel antenna
G	Antenna	Spruce	23dbi N-type panel ant	N/A	-	-	-	
F	Antenna	Pine	Sector 18 dBi	N/A	-	-	-	Spruce Omni antenna
G	Antenna	Spruce	Omni 10dBi	N/A	-	-	-	
F	Antenna	Spruce	23dbi N-type panel ant	N/A	-	-	-	PINE Sector antenna
G	Antenna	Pine	Sector 18 dBi	N/A	-	-	-	
F	Antenna	Spruce	23dbi N-type panel ant	N/A	-	-	-	PINE Dish antenna
G	Antenna	Pine	foot Dish Antenna 30 dBi	N/A	-	-	-	
F	Antenna	Spruce	23dbi N-type panel ant	N/A	-	-	-	PINE Omni antenna
G	Antenna	Pine	Omni 10dBi	N/A	-	-	-	
Mains Conducted								
D	RF Cable	Emplus	LMR 400-01	N/A	N/A	NO	189	--
E	RF Cable	Emplus	LMR 400-02	N/A	N/A	NO	189	--
F	Antenna	Pine	foot Dish Antenna 30 dBi	N/A	-	-	-	--
G	Antenna	Spruce	23dbi N-type panel ant	N/A	-	-	-	--
H	RF Cable	Emplus	LMR 400-03	N/A	N/A	NO	189	--
I	RF Cable	Emplus	LMR 400-04	N/A	N/A	NO	189	--
J	Grounding wire	Keywest	N/A	N/A	N/A	NO	180	--
1	Notebook	HP	15s-du1046TX	CND911RJB	-	-	-	--
2	Ethernet cable	TUV	TUV-02	N/A	N/A	NO	150	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

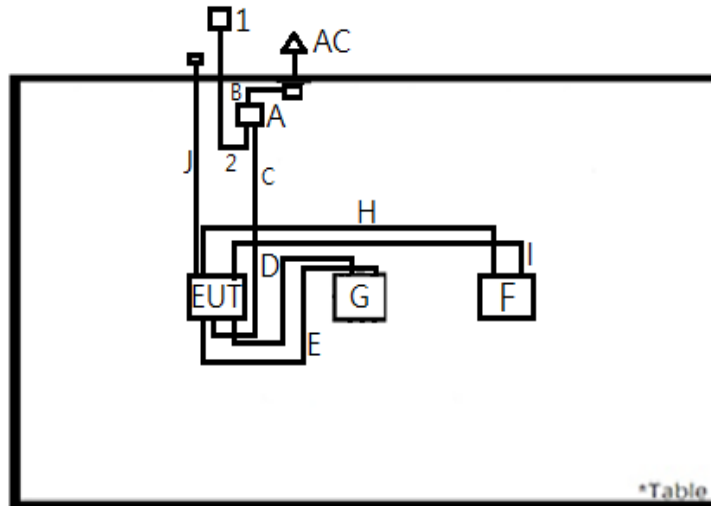


<Mains Conducted Emission mode>

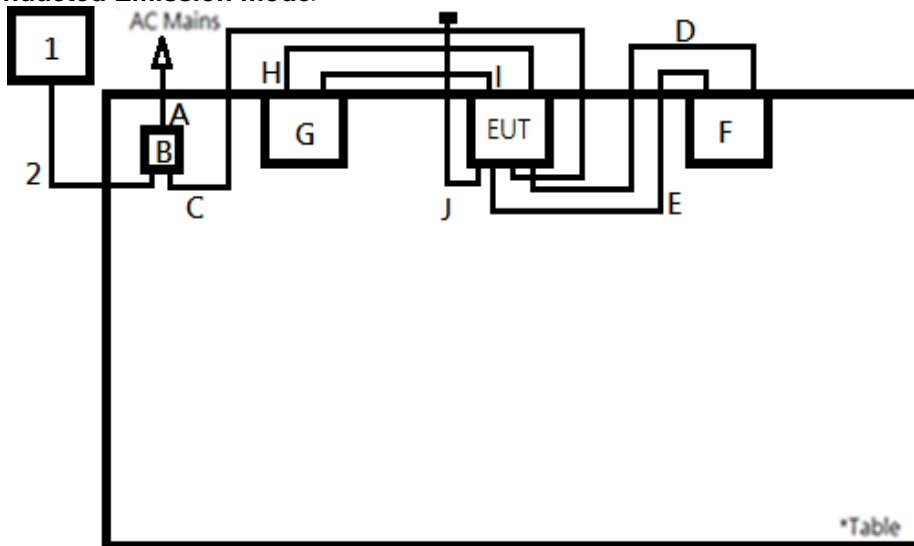

4.6 Duty Cycle of Test Signal






<Spruce>

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	1.99	1.97	98.99	0.04
802.11ax HE20	5.79	5.43	93.78	0.28
802.11ax HE40	3.04	2.72	89.47	0.48
802.11ax HE80	1.66	1.34	80.29	0.95
802.11ax HE160	0.91	0.12	13.35	8.75

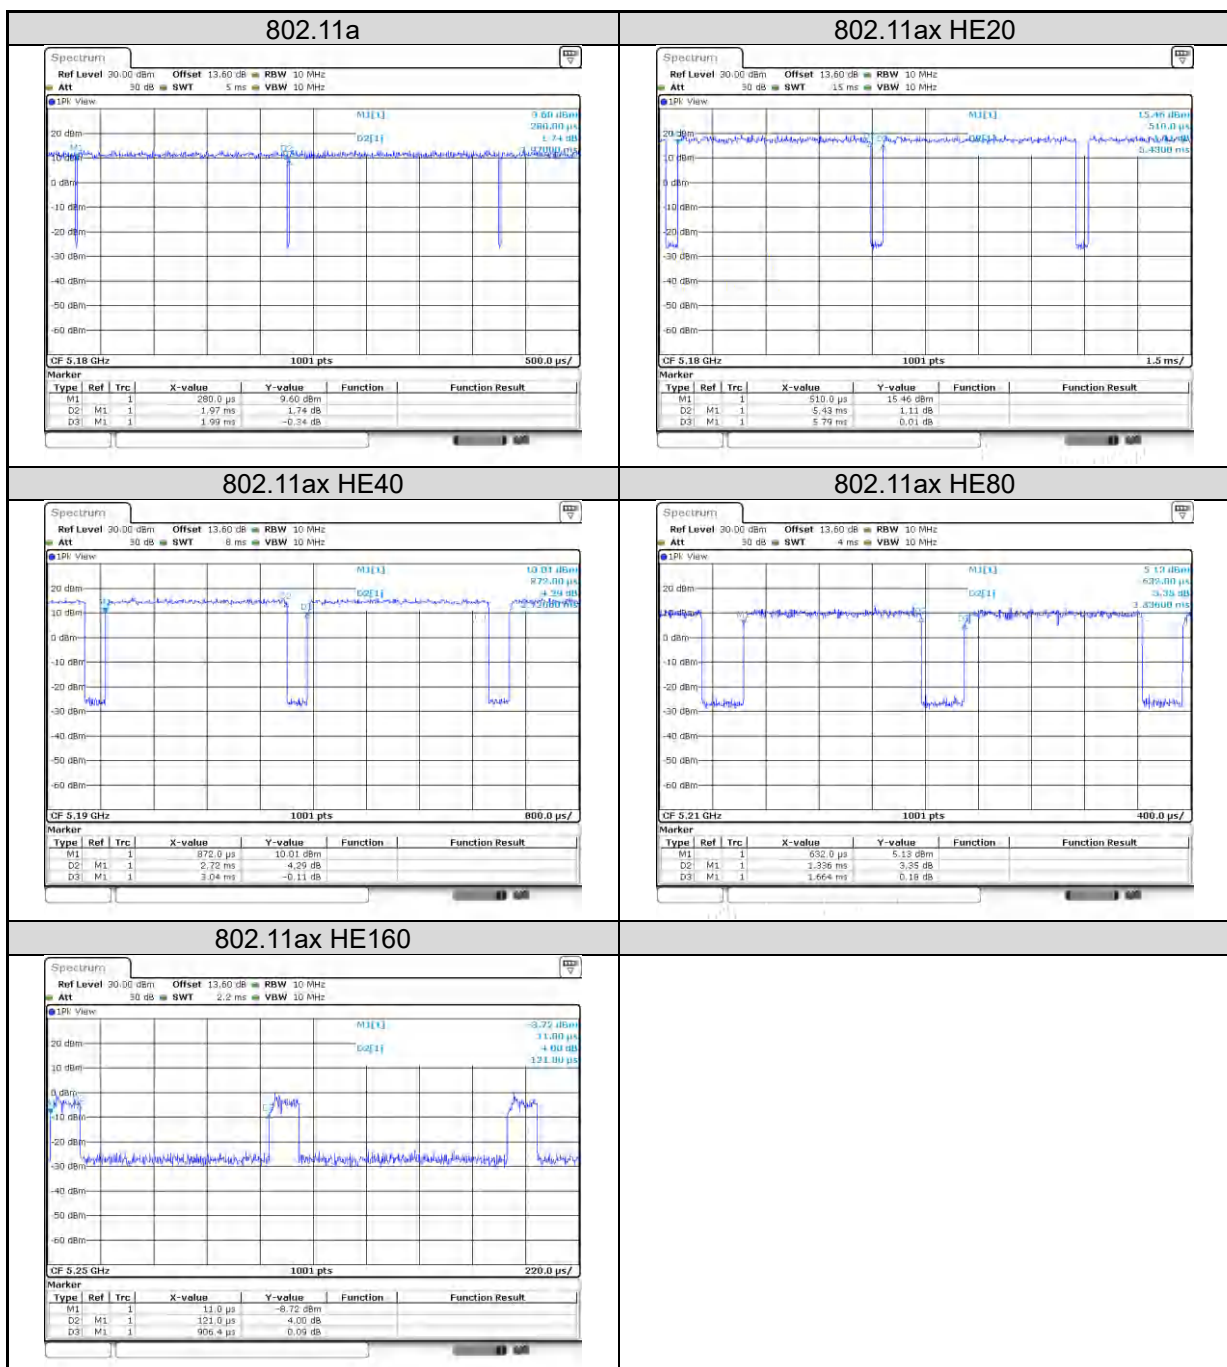

<PINE>

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	2.10	1.98	94.05	0.27
802.11ax HE20	5.57	5.44	97.58	0.11
802.11ax HE40	1.58	1.40	88.89	0.51
802.11ax HE80	0.85	0.70	83.22	0.80
802.11ax HE160	0.80	0.20	25.42	5.95

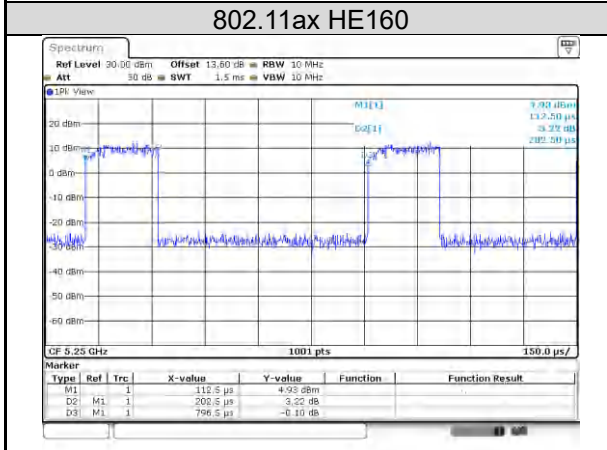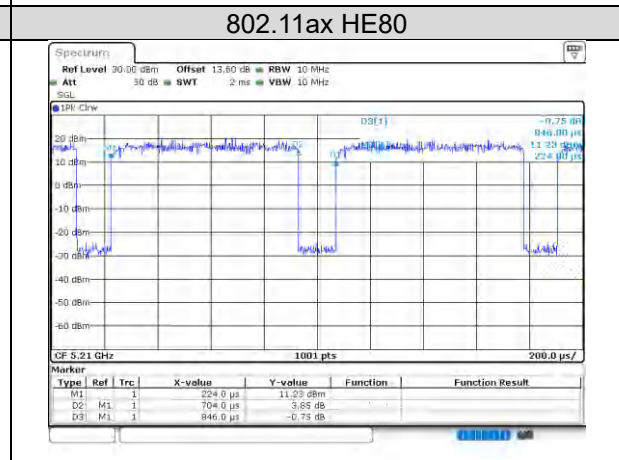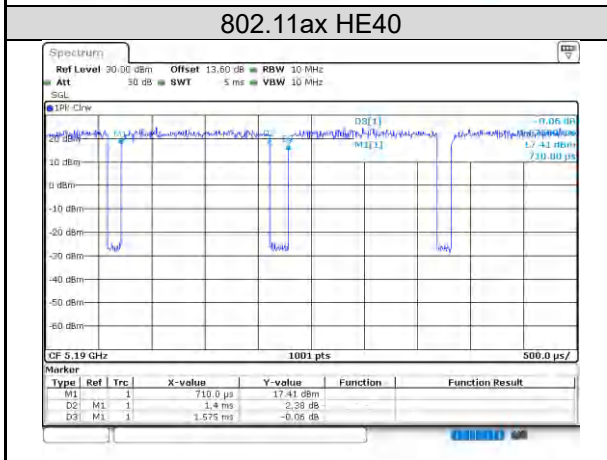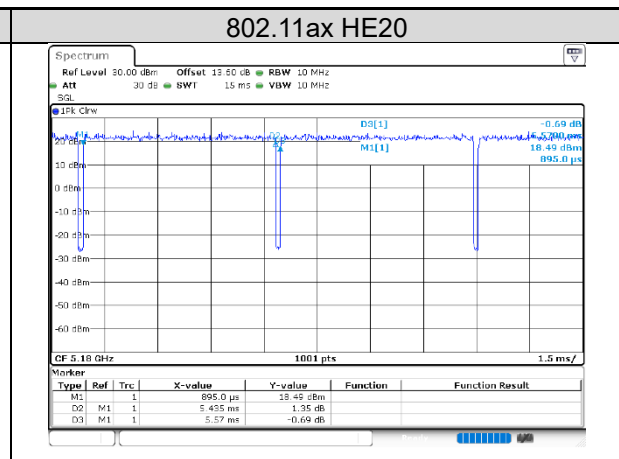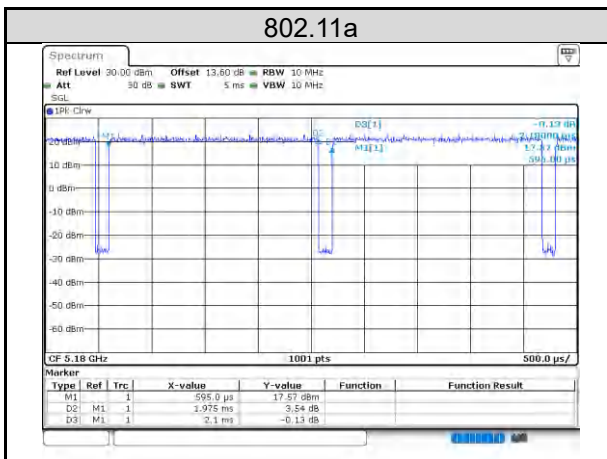

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

The gain value is derived from Antenna datasheet, the EUT's antenna specifications are described as below. The antenna is used with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

		Gain (dBi)				
		Spruce		PINE		
Antenna Type		Panel*	Omni	Sector	Dish*	Omni
EOC655 (Main test)		23	10	18	30	10
EOC655-C23		23	-			
EOC655-C18		18	-			
EOC655-B18		23	-	18	-	-
Max Peak Gain		23	10	18	30	10
CDD Mode	Power Directional Gain	23	10	18	30	10
	PSD Directional Gain	26.01	13.01	21.01	33.01	13.01
Beamforming Mode	Power Directional Gain	26.01	13.01	21.01	33.01	13.01
	PSD Directional Gain	26.01	13.01	21.01	33.01	13.01

Note 1: PSD Directional Gain = $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$

Note 2: * is P to P antenna

		Above 30°Gain (dBi)				
		Spruce		PINE		
Antenna Type		Panel	Omni	Sector	Dish	Omni
EOC655 (Main test)		-	-0.04	-2.78	-	-0.04

5.1.2 Maximum Conducted Output Power

Limit

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p \leq 125 mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250 mW (24 dBm)
U-NII-2A	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-2C	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-3	---	1 Watt (30 dBm)

Note: B* is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20 MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Sensor	R&S	NRP33S	101622	2023/03/21	2024/03/20	2023/9/15	2023/11/2

Test Procedures

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

Test Result

<Spruce_Panel antenna>

CDD

<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	10.08	8.18	12.24	16.76	30.00
40	5200	9.76	8.50	12.19	16.54	30.00
48	5240	10.04	8.92	12.53	17.89	30.00
52	5260	-2.86	-2.41	0.38	1.09	7.00
60	5300	-2.67	-2.62	0.37	1.09	6.99
64	5320	-2.55	-3.01	0.24	1.06	7.00
100	5500	-1.69	-3.42	0.54	1.13	7.00
116	5580	-2.46	-3.24	0.18	1.04	7.00
140	5700	-1.87	-3.58	0.37	1.09	7.00
149	5745	9.71	8.99	12.38	17.28	30.00
157	5785	9.83	9.79	12.82	19.14	30.00
165	5825	9.82	9.19	12.53	17.89	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(19.98) = 24.01 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(19.90) = 23.99 \text{ dBm} < 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(20.14) = 24.04 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(20.14) = 24.04 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(19.98) = 24.01 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(19.94) = 24.00 \text{ dBm} > 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	9.72	7.95	11.93	15.61	30.00
40	5200	9.44	8.20	11.87	15.40	30.00
48	5240	9.59	8.62	12.14	16.38	30.00
52	5260	-3.31	-2.66	0.04	1.01	7.00
60	5300	-3.07	-2.89	0.03	1.01	7.00
64	5320	-2.50	-2.84	0.34	1.08	7.00
100	5500	-2.19	-3.67	0.14	1.03	7.00
116	5580	-2.27	-3.04	0.37	1.09	7.00
140	5700	-1.76	-3.53	0.45	1.11	7.00
149	5745	9.16	8.59	11.89	15.47	30.00
157	5785	9.33	9.11	12.23	16.72	30.00
165	5825	9.25	8.94	12.11	16.25	30.00

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	4.82	5.81	8.35	6.84	30.00
46	5230	5.24	6.22	8.77	7.53	30.00
54	5270	-0.59	0.14	2.80	1.91	7.00
62	5310	-0.09	-0.17	2.88	1.94	7.00
102	5510	0.81	-0.65	3.15	2.07	7.00
110	5550	1.03	-0.29	3.43	2.20	7.00
134	5670	0.43	-0.91	2.82	1.92	7.00
151	5755	7.28	6.24	9.80	9.55	30.00
159	5795	7.02	6.94	9.99	9.98	30.00

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	9.84	8.05	12.05	16.02	30.00
40	5200	9.56	8.32	11.99	15.83	30.00
48	5240	9.75	8.72	12.28	16.89	30.00
52	5260	-3.17	-2.52	0.18	1.04	7.00
60	5300	-2.92	-2.73	0.19	1.04	7.00
64	5320	-2.34	-2.68	0.50	1.12	7.00
100	5500	-2.04	-3.51	0.30	1.07	7.00
116	5580	-2.12	-2.91	0.51	1.13	7.00
140	5700	-1.59	-3.38	0.62	1.15	7.00
149	5745	9.28	8.77	12.04	16.01	30.00
157	5785	9.45	9.22	12.35	17.17	30.00
165	5825	9.37	9.01	12.20	16.61	30.00

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	4.93	5.95	8.48	7.05	30.00
46	5230	5.41	6.38	8.93	7.82	30.00
54	5270	-0.43	0.29	2.96	1.97	7.00
62	5310	0.03	-0.02	3.02	2.00	7.00
102	5510	0.96	-0.48	3.31	2.14	7.00
110	5550	1.16	-0.12	3.58	2.28	7.00
134	5670	0.59	-0.72	2.99	1.99	7.00
151	5755	7.35	6.32	9.88	9.72	30.00
159	5795	7.09	7.04	10.08	10.18	30.00

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	9.84	8.77	12.35	17.17	30.00
58	5290	3.74	3.77	6.77	4.75	7.00
106	5530	3.96	3.04	6.53	4.50	7.00
122	5610	3.89	3.53	6.72	4.70	7.00
155	5775	18.75	18.59	21.68	147.27	30.00

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	2.11	2.76	5.46	3.51	7.00
114	5570	4.08	3.12	6.64	4.61	7.00

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	9.93	8.17	12.15	16.40	30.00
40	5200	9.67	8.44	12.11	16.25	30.00
48	5240	9.87	8.83	12.39	17.34	30.00
52	5260	-3.01	-2.38	0.33	1.08	7.00
60	5300	-2.76	-2.57	0.35	1.08	7.00
64	5320	-2.18	-2.52	0.66	1.17	7.00
100	5500	-1.90	-3.35	0.45	1.11	7.00
116	5580	-1.95	-2.77	0.67	1.17	7.00
140	5700	-1.45	-3.24	0.76	1.19	7.00
149	5745	9.43	8.86	12.16	16.46	30.00
157	5785	9.52	9.34	12.44	17.54	30.00
165	5825	9.44	9.07	12.27	16.86	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(21.14) = 24.25 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(21.34) = 24.29 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(21.14) = 24.25 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(21.26) = 24.28 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(21.30) = 24.28 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(21.14) = 24.25 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	5.05	6.09	8.61	7.26	30.00
46	5230	5.53	6.47	9.04	8.01	30.00
54	5270	-0.26	0.44	3.11	2.05	7.00
62	5310	0.17	0.12	3.16	2.07	7.00
102	5510	1.10	-0.34	3.45	2.21	7.00
110	5550	1.32	0.06	3.75	2.37	7.00
134	5670	0.73	-0.57	3.14	2.06	7.00
151	5755	7.47	6.45	10.00	10.00	30.00
159	5795	7.18	7.11	10.16	10.36	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(40.28) = 27.05 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.12) = 27.03 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	10.07	8.93	12.55	17.98	30.00
58	5290	3.91	3.96	6.95	4.95	7.00
106	5530	4.11	3.18	6.68	4.66	7.00
122	5610	4.04	3.69	6.88	4.87	7.00
155	5775	18.84	18.71	21.79	150.86	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(81.52) = 30.11 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	2.25	2.93	5.61	3.64	7.00
114	5570	4.22	3.28	6.79	4.77	7.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(83.76) = 30.23 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(171.99) = 33.36 \text{ dBm} > 24 \text{ dBm}$.

Beamforming
<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	6.83	5.04	9.04	8.01	26.99
40	5200	6.55	5.31	8.98	7.91	26.99
48	5240	6.74	5.71	9.27	8.44	26.99
52	5260	-6.18	-5.53	-2.83	0.52	3.99
60	5300	-5.93	-5.74	-2.82	0.52	3.99
64	5320	-5.35	-5.69	-2.51	0.56	3.99
100	5500	-5.05	-6.52	-2.71	0.54	3.99
116	5580	-5.13	-5.92	-2.50	0.56	3.99
140	5700	-4.60	-6.39	-2.39	0.58	3.99
149	5745	6.27	5.76	9.03	8.00	30.00
157	5785	6.44	6.21	9.34	8.58	30.00
165	5825	6.36	6.00	9.19	8.31	30.00

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	1.92	2.94	5.47	3.52	26.99
46	5230	2.40	3.37	5.92	3.91	26.99
54	5270	-3.44	-2.72	-0.05	0.99	3.99
62	5310	-2.98	-3.03	0.01	1.00	3.99
102	5510	-2.05	-3.49	0.30	1.07	3.99
110	5550	-1.85	-3.13	0.57	1.14	3.99
134	5670	-2.42	-3.73	-0.02	1.00	3.99
151	5755	4.34	3.31	6.87	4.86	30.00
159	5795	4.08	4.03	7.07	5.09	30.00

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	6.83	5.76	9.34	8.59	26.99
58	5290	0.73	0.76	3.76	2.37	3.99
106	5530	0.95	0.03	3.52	2.25	3.99
122	5610	0.88	0.52	3.71	2.35	3.99
155	5775	15.74	15.58	18.67	73.64	30.00

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	-0.90	-0.25	2.45	1.76	3.99
114	5570	1.07	0.11	3.63	2.31	3.99

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	6.92	5.16	9.14	8.20	26.99
40	5200	6.66	5.43	9.10	8.13	26.99
48	5240	6.86	5.82	9.38	8.67	26.99
52	5260	-6.02	-5.39	-2.68	0.54	3.99
60	5300	-5.77	-5.58	-2.66	0.54	3.99
64	5320	-5.19	-5.53	-2.35	0.58	3.99
100	5500	-4.91	-6.36	-2.56	0.55	3.99
116	5580	-4.96	-5.78	-2.34	0.58	3.99
140	5700	-4.46	-6.25	-2.25	0.60	3.99
149	5745	6.42	5.85	9.15	8.23	30.00
157	5785	6.51	6.33	9.43	8.77	30.00
165	5825	6.43	6.06	9.26	8.43	30.00

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	2.04	3.08	5.60	3.63	26.99
46	5230	2.52	3.46	6.03	4.00	26.99
54	5270	-3.27	-2.57	0.10	1.02	3.99
62	5310	-2.84	-2.89	0.15	1.03	3.99
102	5510	-1.91	-3.35	0.44	1.11	3.99
110	5550	-1.69	-2.95	0.74	1.18	3.99
134	5670	-2.28	-3.58	0.13	1.03	3.99
151	5755	4.46	3.44	6.99	5.00	30.00
159	5795	4.17	4.10	7.15	5.18	30.00

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	7.06	5.92	9.54	8.99	26.99
58	5290	0.90	0.95	3.94	2.47	3.99
106	5530	1.10	0.17	3.67	2.33	3.99
122	5610	1.03	0.68	3.87	2.44	3.99
155	5775	15.83	15.70	18.78	75.44	30.00

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	-0.76	-0.08	2.60	1.82	3.99
114	5570	1.21	0.27	3.78	2.39	3.99

<Spruce_Omni antenna>
CDD
<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	10.08	8.18	12.24	16.76	26.00	12.20	21.00
40	5200	9.76	8.50	12.19	16.54	26.00	12.15	21.00
48	5240	10.04	8.92	12.53	17.89	26.00	12.49	21.00
52	5260	-2.86	-2.41	0.38	1.09	20.00	-	-
60	5300	-2.67	-2.62	0.37	1.09	19.99	-	-
64	5320	-2.55	-3.01	0.24	1.06	20.00	-	-
100	5500	-1.69	-3.42	0.54	1.13	20.00	-	-
116	5580	-2.46	-3.24	0.18	1.04	20.00	-	-
140	5700	-1.87	-3.58	0.37	1.09	20.00	-	-
149	5745	9.71	8.99	12.38	17.28	26.00	-	-
157	5785	9.83	9.79	12.82	19.14	26.00	-	-
165	5825	9.82	9.19	12.53	17.89	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(19.98) = 24.01 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(19.90) = 23.99 \text{ dBm} < 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(20.14) = 24.04 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(20.14) = 24.04 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(19.98) = 24.01 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(19.94) = 24.00 \text{ dBm} > 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	9.72	7.95	11.93	15.61	26.00	11.89	21.00
40	5200	9.44	8.20	11.87	15.40	26.00	11.83	21.00
48	5240	9.59	8.62	12.14	16.38	26.00	12.10	21.00
52	5260	-3.31	-2.66	0.04	1.01	20.00	-	-
60	5300	-3.07	-2.89	0.03	1.01	20.00	-	-
64	5320	-2.50	-2.84	0.34	1.08	20.00	-	-
100	5500	-2.19	-3.67	0.14	1.03	20.00	-	-
116	5580	-2.27	-3.04	0.37	1.09	20.00	-	-
140	5700	-1.76	-3.53	0.45	1.11	20.00	-	-
149	5745	9.16	8.59	11.89	15.47	26.00	-	-
157	5785	9.33	9.11	12.23	16.72	26.00	-	-
165	5825	9.25	8.94	12.11	16.25	26.00	-	-

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	4.82	5.81	8.35	6.84	26.00	8.31	21.00
46	5230	5.24	6.22	8.77	7.53	26.00	8.73	21.00
54	5270	-0.59	0.14	2.80	1.91	20.00	-	-
62	5310	-0.09	-0.17	2.88	1.94	20.00	-	-
102	5510	0.81	-0.65	3.15	2.07	20.00	-	-
110	5550	1.03	-0.29	3.43	2.20	20.00	-	-
134	5670	0.43	-0.91	2.82	1.92	20.00	-	-
151	5755	7.28	6.24	9.80	9.55	26.00	-	-
159	5795	7.02	6.94	9.99	9.98	26.00	-	-

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	9.84	8.05	12.05	16.02	26.00	12.01	21.00
40	5200	9.56	8.32	11.99	15.83	26.00	11.95	21.00
48	5240	9.75	8.72	12.28	16.89	26.00	12.24	21.00
52	5260	-3.17	-2.52	0.18	1.04	20.00	-	-
60	5300	-2.92	-2.73	0.19	1.04	20.00	-	-
64	5320	-2.34	-2.68	0.50	1.12	20.00	-	-
100	5500	-2.04	-3.51	0.30	1.07	20.00	-	-
116	5580	-2.12	-2.91	0.51	1.13	20.00	-	-
140	5700	-1.59	-3.38	0.62	1.15	20.00	-	-
149	5745	9.28	8.77	12.04	16.01	26.00	-	-
157	5785	9.45	9.22	12.35	17.17	26.00	-	-
165	5825	9.37	9.01	12.20	16.61	26.00	-	-

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	4.93	5.95	8.48	7.05	26.00	8.44	21.00
46	5230	5.41	6.38	8.93	7.82	26.00	8.89	21.00
54	5270	-0.43	0.29	2.96	1.97	20.00	-	-
62	5310	0.03	-0.02	3.02	2.00	20.00	-	-
102	5510	0.96	-0.48	3.31	2.14	20.00	-	-
110	5550	1.16	-0.12	3.58	2.28	20.00	-	-
134	5670	0.59	-0.72	2.99	1.99	20.00	-	-
151	5755	7.35	6.32	9.88	9.72	26.00	-	-
159	5795	7.09	7.04	10.08	10.18	26.00	-	-

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	9.84	8.77	12.35	17.17	26.00	12.31	21.00
58	5290	3.74	3.77	6.77	4.75	20.00	-	-
106	5530	3.96	3.04	6.53	4.50	20.00	-	-
122	5610	3.89	3.53	6.72	4.70	20.00	-	-
155	5775	18.75	18.59	21.68	147.27	26.00	-	-

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	2.11	2.76	5.46	3.51	20.00	5.42	21.00
114	5570	4.08	3.12	6.64	4.61	20.00	-	-

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	9.93	8.17	12.15	16.40	26.00	12.11	21.00
40	5200	9.67	8.44	12.11	16.25	26.00	12.07	21.00
48	5240	9.87	8.83	12.39	17.34	26.00	12.35	21.00
52	5260	-3.01	-2.38	0.33	1.08	20.00	-	-
60	5300	-2.76	-2.57	0.35	1.08	20.00	-	-
64	5320	-2.18	-2.52	0.66	1.17	20.00	-	-
100	5500	-1.90	-3.35	0.45	1.11	20.00	-	-
116	5580	-1.95	-2.77	0.67	1.17	20.00	-	-
140	5700	-1.45	-3.24	0.76	1.19	20.00	-	-
149	5745	9.43	8.86	12.16	16.46	26.00	-	-
157	5785	9.52	9.34	12.44	17.54	26.00	-	-
165	5825	9.44	9.07	12.27	16.86	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(21.14) = 24.25 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(21.34) = 24.29 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(21.14) = 24.25 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(21.26) = 24.28 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(21.30) = 24.28 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(21.14) = 24.25 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	5.05	6.09	8.61	7.26	26.00	8.57	21.00
46	5230	5.53	6.47	9.04	8.01	26.00	9.00	21.00
54	5270	-0.26	0.44	3.11	2.05	20.00	-	-
62	5310	0.17	0.12	3.16	2.07	20.00	-	-
102	5510	1.10	-0.34	3.45	2.21	20.00	-	-
110	5550	1.32	0.06	3.75	2.37	20.00	-	-
134	5670	0.73	-0.57	3.14	2.06	20.00	-	-
151	5755	7.47	6.45	10.00	10.00	26.00	-	-
159	5795	7.18	7.11	10.16	10.36	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(40.28) = 27.05 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.12) = 27.03 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	10.07	8.93	12.55	17.98	26.00	12.51	21.00
58	5290	3.91	3.96	6.95	4.95	20.00	-	-
106	5530	4.11	3.18	6.68	4.66	20.00	-	-
122	5610	4.04	3.69	6.88	4.87	20.00	-	-
155	5775	18.84	18.71	21.79	150.86	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(81.52) = 30.11 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	2.25	2.93	5.61	3.64	20.00	5.57	21.00
114	5570	4.22	3.28	6.79	4.77	20.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(83.76) = 30.23 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(171.99) = 33.36 \text{ dBm} > 24 \text{ dBm}$.

Beamforming
<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	6.83	5.04	9.04	8.01	22.99	9.00	21.00
40	5200	6.55	5.31	8.98	7.91	22.99	8.94	21.00
48	5240	6.74	5.71	9.27	8.44	22.99	9.23	21.00
52	5260	-6.18	-5.53	-2.83	0.52	16.99	-	-
60	5300	-5.93	-5.74	-2.82	0.52	16.99	-	-
64	5320	-5.35	-5.69	-2.51	0.56	16.99	-	-
100	5500	-5.05	-6.52	-2.71	0.54	16.99	-	-
116	5580	-5.13	-5.92	-2.50	0.56	16.99	-	-
140	5700	-4.60	-6.39	-2.39	0.58	16.99	-	-
149	5745	6.27	5.76	9.03	8.00	22.99	-	-
157	5785	6.44	6.21	9.34	8.58	22.99	-	-
165	5825	6.36	6.00	9.19	8.31	22.99	-	-

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	1.92	2.94	5.47	3.52	22.99	5.43	21.00
46	5230	2.40	3.37	5.92	3.91	22.99	5.88	21.00
54	5270	-3.44	-2.72	-0.05	0.99	16.99	-	-
62	5310	-2.98	-3.03	0.01	1.00	16.99	-	-
102	5510	-2.05	-3.49	0.30	1.07	16.99	-	-
110	5550	-1.85	-3.13	0.57	1.14	16.99	-	-
134	5670	-2.42	-3.73	-0.02	1.00	16.99	-	-
151	5755	4.34	3.31	6.87	4.86	22.99	-	-
159	5795	4.08	4.03	7.07	5.09	22.99	-	-

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	6.83	5.76	9.34	8.59	22.99	9.30	21.00
58	5290	0.73	0.76	3.76	2.37	16.99	-	-
106	5530	0.95	0.03	3.52	2.25	16.99	-	-
122	5610	0.88	0.52	3.71	2.35	16.99	-	-
155	5775	15.74	15.58	18.67	73.64	22.99	-	-

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	-0.90	-0.25	2.45	1.76	16.99	2.41	21.00
114	5570	1.07	0.11	3.63	2.31	16.99	-	-

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	6.92	5.16	9.14	8.20	22.99	9.10	21.00
40	5200	6.66	5.43	9.10	8.13	22.99	9.06	21.00
48	5240	6.86	5.82	9.38	8.67	22.99	9.34	21.00
52	5260	-6.02	-5.39	-2.68	0.54	16.99	-	-
60	5300	-5.77	-5.58	-2.66	0.54	16.99	-	-
64	5320	-5.19	-5.53	-2.35	0.58	16.99	-	-
100	5500	-4.91	-6.36	-2.56	0.55	16.99	-	-
116	5580	-4.96	-5.78	-2.34	0.58	16.99	-	-
140	5700	-4.46	-6.25	-2.25	0.60	16.99	-	-
149	5745	6.42	5.85	9.15	8.23	22.99	-	-
157	5785	6.51	6.33	9.43	8.77	22.99	-	-
165	5825	6.43	6.06	9.26	8.43	22.99	-	-

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	2.04	3.08	5.60	3.63	22.99	5.56	21.00
46	5230	2.52	3.46	6.03	4.00	22.99	5.99	21.00
54	5270	-3.27	-2.57	0.10	1.02	16.99	-	-
62	5310	-2.84	-2.89	0.15	1.03	16.99	-	-
102	5510	-1.91	-3.35	0.44	1.11	16.99	-	-
110	5550	-1.69	-2.95	0.74	1.18	16.99	-	-
134	5670	-2.28	-3.58	0.13	1.03	16.99	-	-
151	5755	4.46	3.44	6.99	5.00	22.99	-	-
159	5795	4.17	4.10	7.15	5.18	22.99	-	-

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	7.06	5.92	9.54	8.99	22.99	9.50	21.00
58	5290	0.90	0.95	3.94	2.47	16.99	-	-
106	5530	1.10	0.17	3.67	2.33	16.99	-	-
122	5610	1.03	0.68	3.87	2.44	16.99	-	-
155	5775	15.83	15.70	18.78	75.44	22.99	-	-

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	-0.76	-0.08	2.60	1.82	16.99	2.56	21.00
114	5570	1.21	0.27	3.78	2.39	16.99	-	-

<PINE_Sector antenna>
CDD
<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	10.25	9.04	12.70	18.61	18.00	9.92	21.00
40	5200	10.27	9.22	12.79	19.00	18.00	10.01	21.00
48	5240	9.71	9.26	12.50	17.79	18.00	9.73	21.00
52	5260	3.93	3.05	6.52	4.49	12.00	-	-
60	5300	3.82	3.33	6.59	4.56	12.00	-	-
64	5320	3.74	3.65	6.71	4.68	12.00	-	-
100	5500	3.81	3.69	6.76	4.74	12.00	-	-
116	5580	3.94	3.11	6.56	4.52	12.00	-	-
140	5700	4.02	3.07	6.58	4.55	12.00	-	-
149	5745	15.32	14.55	17.96	62.55	18.00	-	-
157	5785	15.02	14.88	17.96	62.53	18.00	-	-
165	5825	14.49	14.89	17.70	58.95	18.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(20.62) = 24.14 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(20.38) = 24.09 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(20.54) = 24.13 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(20.50) = 24.12 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(20.50) = 24.12 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(20.62) = 24.14 \text{ dBm} > 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	10.14	9.02	12.63	18.31	18.00	9.85	21.00
40	5200	10.35	9.29	12.86	19.33	18.00	10.09	21.00
48	5240	10.26	9.91	13.10	20.41	18.00	10.32	21.00
52	5260	4.11	3.23	6.70	4.68	12.00	-	-
60	5300	4.00	3.58	6.81	4.79	12.00	-	-
64	5320	3.94	3.89	6.93	4.93	12.00	-	-
100	5500	3.49	3.37	6.44	4.41	12.00	-	-
116	5580	4.07	3.34	6.73	4.71	12.00	-	-
140	5700	4.18	3.32	6.78	4.77	12.00	-	-
149	5745	14.89	14.16	17.55	56.89	18.00	-	-
157	5785	14.63	14.35	17.50	56.27	18.00	-	-
165	5825	14.06	14.49	17.29	53.59	18.00	-	-

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	13.12	11.99	15.60	36.32	18.00	12.83	21.00
46	5230	13.19	12.39	15.82	38.18	18.00	13.04	21.00
54	5270	6.86	6.14	9.53	8.96	12.00	-	-
62	5310	6.38	5.98	9.19	8.31	12.00	-	-
102	5510	5.97	6.08	9.04	8.01	12.00	-	-
110	5550	6.12	6.36	9.25	8.42	12.00	-	-
134	5670	6.48	5.91	9.21	8.35	12.00	-	-
151	5755	14.86	14.39	17.64	58.10	18.00	-	-
159	5795	14.79	14.46	17.64	58.06	18.00	-	-

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	10.28	9.16	12.77	18.91	18.00	9.99	21.00
40	5200	10.50	9.44	13.01	20.01	18.00	10.24	21.00
48	5240	10.39	10.04	13.23	21.03	18.00	10.45	21.00
52	5260	4.28	3.37	6.86	4.85	12.00	-	-
60	5300	4.13	3.71	6.94	4.94	12.00	-	-
64	5320	4.11	4.05	7.09	5.12	12.00	-	-
100	5500	3.63	3.53	6.59	4.56	12.00	-	-
116	5580	4.25	3.52	6.91	4.91	12.00	-	-
140	5700	4.32	3.50	6.94	4.94	12.00	-	-
149	5745	15.04	14.29	17.69	58.77	18.00	-	-
157	5785	14.77	14.48	17.64	58.05	18.00	-	-
165	5825	14.22	14.62	17.43	55.40	18.00	-	-

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	13.27	12.13	15.75	37.56	18.00	12.97	21.00
46	5230	13.34	12.53	15.96	39.48	18.00	13.19	21.00
54	5270	7.02	6.31	9.69	9.31	12.00	-	-
62	5310	6.54	6.11	9.34	8.59	12.00	-	-
102	5510	6.11	6.24	9.19	8.29	12.00	-	-
110	5550	6.25	6.51	9.39	8.69	12.00	-	-
134	5670	6.62	6.07	9.36	8.64	12.00	-	-
151	5755	15.01	14.53	17.79	60.07	18.00	-	-
159	5795	14.92	14.62	17.78	60.02	18.00	-	-

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	13.29	12.24	15.81	38.08	18.00	13.03	21.00
58	5290	8.91	8.22	11.59	14.42	12.00	-	-
106	5530	8.74	8.78	11.77	15.03	12.00	-	-
122	5610	8.29	8.04	11.18	13.11	12.00	-	-
155	5775	14.86	14.64	17.76	59.73	18.00	-	-

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	8.74	8.02	11.41	13.82	12.00	8.63	21.00
114	5570	8.71	8.06	11.41	13.83	12.00	-	-

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	10.42	9.29	12.90	19.51	18.00	10.13	21.00
40	5200	10.66	9.61	13.18	20.78	18.00	10.40	21.00
48	5240	10.55	10.17	13.37	21.75	18.00	10.60	21.00
52	5260	4.43	3.55	7.02	5.04	12.00	-	-
60	5300	4.29	3.84	7.08	5.11	12.00	-	-
64	5320	4.29	4.18	7.25	5.30	12.00	-	-
100	5500	3.79	3.67	6.74	4.72	12.00	-	-
116	5580	4.38	3.64	7.04	5.05	12.00	-	-
140	5700	4.47	3.64	7.09	5.11	12.00	-	-
149	5745	15.18	14.43	17.83	60.69	18.00	-	-
157	5785	14.89	14.65	17.78	60.01	18.00	-	-
165	5825	14.37	14.76	17.58	57.28	18.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(22.38) = 24.50 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(22.46) = 24.51 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(22.50) = 24.52 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(22.38) = 24.50 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(22.46) = 24.51 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(22.46) = 24.51 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	13.43	12.27	15.90	38.89	18.00	13.12	21.00
46	5230	13.49	12.66	16.11	40.79	18.00	13.33	21.00
54	5270	7.15	6.47	9.83	9.62	12.00	-	-
62	5310	6.68	6.29	9.50	8.91	12.00	-	-
102	5510	6.26	6.39	9.34	8.58	12.00	-	-
110	5550	6.42	6.64	9.54	9.00	12.00	-	-
134	5670	6.78	6.23	9.52	8.96	12.00	-	-
151	5755	15.13	14.67	17.92	61.89	18.00	-	-
159	5795	15.08	14.78	17.94	62.27	18.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(40.60) = 27.09 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.60) = 27.09 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.68) = 27.09 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(40.44) = 27.07 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	13.43	12.37	15.94	39.29	18.00	13.17	21.00
58	5290	9.05	8.38	11.74	14.92	12.00	-	-
106	5530	8.90	8.95	11.94	15.61	12.00	-	-
122	5610	8.43	8.21	11.33	13.59	12.00	-	-
155	5775	14.99	14.79	17.90	61.68	18.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(82.00) = 30.14 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(82.32) = 30.16 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(82.32) = 30.16 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	8.91	8.14	11.55	14.30	12.00	8.78	21.00
114	5570	8.86	8.19	11.55	14.28	12.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(82.16) = 30.15 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(164.32) = 33.16 \text{ dBm} > 24 \text{ dBm}$.

Beamforming
<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	7.27	6.15	9.76	9.45	14.99	6.98	21.00
40	5200	7.49	6.43	10.00	10.01	14.99	7.23	21.00
48	5240	7.38	7.03	10.22	10.52	14.99	7.44	21.00
52	5260	1.27	0.36	3.85	2.43	8.99	-	-
60	5300	1.12	0.70	3.93	2.47	8.99	-	-
64	5320	1.10	1.04	4.08	2.56	8.99	-	-
100	5500	0.62	0.52	3.58	2.28	8.99	-	-
116	5580	1.24	0.51	3.90	2.46	8.99	-	-
140	5700	1.31	0.49	3.93	2.47	8.99	-	-
149	5745	12.03	11.28	14.68	29.39	14.99	-	-
157	5785	11.76	11.47	14.63	29.02	14.99	-	-
165	5825	11.21	11.61	14.42	27.70	14.99	-	-

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	10.26	9.12	12.74	18.78	14.99	9.96	21.00
46	5230	10.33	9.52	12.95	19.74	14.99	10.18	21.00
54	5270	4.01	3.30	6.68	4.66	8.99	-	-
62	5310	3.53	3.10	6.33	4.30	8.99	-	-
102	5510	3.10	3.23	6.18	4.15	8.99	-	-
110	5550	3.24	3.50	6.38	4.35	8.99	-	-
134	5670	3.61	3.06	6.35	4.32	8.99	-	-
151	5755	12.00	11.52	14.78	30.04	14.99	-	-
159	5795	11.91	11.61	14.77	30.01	14.99	-	-

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	10.28	9.23	12.80	19.04	14.99	10.02	21.00
58	5290	5.90	5.21	8.58	7.21	8.99	-	-
106	5530	5.73	5.77	8.76	7.52	8.99	-	-
122	5610	5.28	5.03	8.17	6.56	8.99	-	-
155	5775	11.85	11.63	14.75	29.87	14.99	-	-

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	5.73	5.01	8.40	6.91	8.99	5.62	21.00
114	5570	5.70	5.05	8.40	6.91	8.99	-	-

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	7.41	6.28	9.89	9.75	14.99	7.12	21.00
40	5200	7.65	6.60	10.17	10.39	14.99	7.39	21.00
48	5240	7.54	7.16	10.36	10.88	14.99	7.59	21.00
52	5260	1.42	0.54	4.01	2.52	8.99	-	-
60	5300	1.28	0.83	4.07	2.55	8.99	-	-
64	5320	1.28	1.17	4.24	2.65	8.99	-	-
100	5500	0.78	0.66	3.73	2.36	8.99	-	-
116	5580	1.37	0.63	4.03	2.53	8.99	-	-
140	5700	1.46	0.63	4.08	2.56	8.99	-	-
149	5745	12.17	11.42	14.82	30.35	14.99	-	-
157	5785	11.88	11.64	14.77	30.01	14.99	-	-
165	5825	11.36	11.75	14.57	28.64	14.99	-	-

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	10.42	9.26	12.89	19.45	14.99	10.11	21.00
46	5230	10.48	9.65	13.10	20.39	14.99	10.32	21.00
54	5270	4.14	3.46	6.82	4.81	8.99	-	-
62	5310	3.67	3.28	6.49	4.46	8.99	-	-
102	5510	3.25	3.38	6.33	4.29	8.99	-	-
110	5550	3.41	3.63	6.53	4.50	8.99	-	-
134	5670	3.77	3.22	6.51	4.48	8.99	-	-
151	5755	12.12	11.66	14.91	30.95	14.99	-	-
159	5795	12.07	11.77	14.93	31.14	14.99	-	-

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	10.42	9.36	12.93	19.65	14.99	10.16	21.00
58	5290	6.04	5.37	8.73	7.46	8.99	-	-
106	5530	5.89	5.94	8.93	7.81	8.99	-	-
122	5610	5.42	5.20	8.32	6.79	8.99	-	-
155	5775	11.98	11.78	14.89	30.84	14.99	-	-

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	5.90	5.13	8.54	7.15	8.99	5.77	21.00
114	5570	5.85	5.18	8.54	7.14	8.99	-	-

<PINE_Dish antenna>
CDD
<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	14.72	13.61	17.21	52.61	23.00
40	5200	14.85	13.64	17.30	53.67	23.00
48	5240	14.56	13.62	17.13	51.59	23.00
52	5260	-8.66	-9.63	-6.11	0.25	0.00
60	5300	-8.32	-8.73	-5.51	0.28	0.00
64	5320	-8.78	-8.92	-5.84	0.26	0.00
100	5500	-8.76	-8.84	-5.79	0.26	0.00
116	5580	-8.18	-9.01	-5.56	0.28	0.00
140	5700	-7.83	-8.94	-5.34	0.29	0.00
149	5745	16.72	16.30	19.53	89.65	30.00
157	5785	16.29	16.48	19.40	87.02	30.00
165	5825	14.03	14.40	17.23	52.84	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(20.58) = 24.13 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(20.66) = 24.15 \text{ dBm} < 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(20.42) = 24.10 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(20.46) = 24.11 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(20.62) = 24.14 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(20.50) = 24.12 \text{ dBm} > 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	13.35	12.39	15.91	38.97	23.00
40	5200	15.02	13.77	17.45	55.59	23.00
48	5240	15.30	14.20	17.80	60.19	23.00
52	5260	-8.36	-9.42	-5.85	0.26	0.00
60	5300	-8.07	-8.60	-5.32	0.29	0.00
64	5320	-8.59	-8.70	-5.63	0.27	0.00
100	5500	-8.25	-8.35	-5.29	0.30	0.00
116	5580	-7.60	-8.51	-5.02	0.31	0.00
140	5700	-7.25	-8.82	-4.95	0.32	0.00
149	5745	15.43	15.02	18.24	66.68	30.00
157	5785	16.23	16.35	19.30	85.13	30.00
165	5825	13.24	13.55	16.41	43.73	30.00

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	11.59	10.64	14.15	26.01	23.00
46	5230	15.57	14.92	18.27	67.10	23.00
54	5270	-5.73	-6.27	-2.98	0.50	0.00
62	5310	-5.25	-5.40	-2.31	0.59	0.00
102	5510	-5.62	-5.67	-2.63	0.55	0.00
110	5550	-5.42	-5.50	-2.45	0.57	0.00
134	5670	-5.12	-5.90	-2.48	0.56	0.00
151	5755	18.65	18.24	21.46	139.96	30.00
159	5795	17.55	17.48	20.53	112.86	30.00

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	13.44	12.48	16.00	39.78	23.00
40	5200	15.07	13.86	17.52	56.46	23.00
48	5240	15.39	14.28	17.88	61.39	23.00
52	5260	-8.23	-9.29	-5.72	0.27	0.00
60	5300	-7.90	-8.44	-5.15	0.31	0.00
64	5320	-8.45	-8.54	-5.48	0.28	0.00
100	5500	-8.07	-8.17	-5.11	0.31	0.00
116	5580	-7.46	-8.33	-4.86	0.33	0.00
140	5700	-7.11	-8.68	-4.81	0.33	0.00
149	5745	15.51	15.14	18.34	68.22	30.00
157	5785	16.31	16.42	19.38	86.61	30.00
165	5825	13.35	13.68	16.53	44.96	30.00

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	11.73	10.80	14.30	26.92	23.00
46	5230	15.66	15.01	18.36	68.51	23.00
54	5270	-5.57	-6.14	-2.84	0.52	0.00
62	5310	-5.11	-5.24	-2.16	0.61	0.00
102	5510	-5.49	-5.52	-2.49	0.56	0.00
110	5550	-5.28	-5.34	-2.30	0.59	0.00
134	5670	-4.97	-5.76	-2.34	0.58	0.00
151	5755	18.77	18.35	21.58	143.73	30.00
159	5795	17.62	17.57	20.61	114.96	30.00

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	11.58	10.61	14.13	25.90	23.00
58	5290	-3.35	-3.74	-0.53	0.89	0.00
106	5530	-3.10	-3.31	-0.19	0.96	0.00
122	5610	-3.08	-3.54	-0.29	0.93	0.00
155	5775	16.83	16.81	19.83	96.17	30.00

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	-4.57	-5.34	-1.93	0.64	0.00
114	5570	-4.51	-5.44	-1.94	0.64	0.00

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	13.53	12.57	16.09	40.61	23.00
40	5200	15.15	13.95	17.60	57.57	23.00
48	5240	15.47	14.42	17.99	62.91	23.00
52	5260	-8.07	-9.16	-5.57	0.28	0.00
60	5300	-7.72	-8.31	-4.99	0.32	0.00
64	5320	-8.29	-8.40	-5.33	0.29	0.00
100	5500	-7.94	-8.05	-4.98	0.32	0.00
116	5580	-7.31	-8.19	-4.72	0.34	0.00
140	5700	-6.97	-8.55	-4.68	0.34	0.00
149	5745	15.58	15.19	18.40	69.18	30.00
157	5785	16.38	16.45	19.43	87.61	30.00
165	5825	13.44	13.76	16.61	45.85	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(22.30) = 24.48 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(22.42) = 24.51 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(22.62) = 24.54 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(22.26) = 24.48 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(22.38) = 24.50 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(22.38) = 24.50 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	11.87	10.94	14.44	27.80	23.00
46	5230	15.77	15.08	18.45	69.97	23.00
54	5270	-5.43	-5.96	-2.68	0.54	0.00
62	5310	-4.96	-5.09	-2.01	0.63	0.00
102	5510	-5.32	-5.39	-2.34	0.58	0.00
110	5550	-5.12	-5.18	-2.14	0.61	0.00
134	5670	-4.81	-5.62	-2.19	0.60	0.00
151	5755	18.85	18.44	21.66	146.56	30.00
159	5795	17.68	17.62	20.66	116.42	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(40.44) = 27.07 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.44) = 27.07 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(40.28) = 27.05 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.52) = 27.08 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(40.52) = 27.08 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	11.72	10.74	14.27	26.72	23.00
58	5290	-3.19	-3.57	-0.37	0.92	0.00
106	5530	-2.96	-3.14	-0.04	0.99	0.00
122	5610	-2.94	-3.41	-0.16	0.96	0.00
155	5775	16.95	16.92	19.95	98.75	30.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(82.32) = 30.16 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(81.84) = 30.13 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.68) = 30.12 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	-4.42	-5.21	-1.79	0.66	0.00
114	5570	-4.36	-5.30	-1.79	0.66	0.00

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(81.84) = 30.13 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(163.68) = 33.14 \text{ dBm} > 24 \text{ dBm}$.

Beamforming
<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	10.43	9.47	12.99	19.89	19.99
40	5200	12.06	10.85	14.51	28.23	19.99
48	5240	12.38	11.27	14.87	30.69	19.99
52	5260	-11.24	-12.30	-8.73	0.13	-3.01
60	5300	-10.91	-11.45	-8.16	0.15	-3.01
64	5320	-11.46	-11.55	-8.49	0.14	-3.01
100	5500	-11.08	-11.18	-8.12	0.15	-3.01
116	5580	-10.47	-11.34	-7.87	0.16	-3.01
140	5700	-10.12	-11.69	-7.82	0.17	-3.01
149	5745	12.50	12.13	15.33	34.11	30.00
157	5785	13.30	13.41	16.37	43.31	30.00
165	5825	10.34	10.67	13.52	22.48	30.00

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	8.72	7.79	11.29	13.46	19.99
46	5230	12.65	12.00	15.35	34.26	19.99
54	5270	-8.58	-9.15	-5.85	0.26	-3.01
62	5310	-8.12	-8.25	-5.17	0.30	-3.01
102	5510	-8.50	-8.53	-5.50	0.28	-3.01
110	5550	-8.29	-8.35	-5.31	0.29	-3.01
134	5670	-7.98	-8.77	-5.35	0.29	-3.01
151	5755	15.76	15.34	18.57	71.87	30.00
159	5795	14.61	14.56	17.60	57.48	30.00

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	8.57	7.60	11.12	12.95	19.99
58	5290	-6.36	-6.75	-3.54	0.44	-3.01
106	5530	-6.11	-6.32	-3.20	0.48	-3.01
122	5610	-6.09	-6.55	-3.30	0.47	-3.01
155	5775	13.82	13.80	16.82	48.09	30.00

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	-7.58	-8.35	-4.94	0.32	-3.01
114	5570	-7.52	-8.45	-4.95	0.32	-3.01

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	10.52	9.56	13.08	20.31	19.99
40	5200	12.14	10.94	14.59	28.78	19.99
48	5240	12.46	11.41	14.98	31.46	19.99
52	5260	-11.08	-12.17	-8.58	0.14	-3.01
60	5300	-10.73	-11.32	-8.00	0.16	-3.01
64	5320	-11.30	-11.41	-8.34	0.15	-3.01
100	5500	-10.95	-11.06	-7.99	0.16	-3.01
116	5580	-10.32	-11.20	-7.73	0.17	-3.01
140	5700	-9.98	-11.56	-7.69	0.17	-3.01
149	5745	12.57	12.18	15.39	34.59	30.00
157	5785	13.37	13.44	16.42	43.81	30.00
165	5825	10.43	10.75	13.60	22.93	30.00

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	8.86	7.93	11.43	13.90	19.99
46	5230	12.76	12.07	15.44	34.99	19.99
54	5270	-8.44	-8.97	-5.69	0.27	-3.01
62	5310	-7.97	-8.10	-5.02	0.31	-3.01
102	5510	-8.33	-8.40	-5.35	0.29	-3.01
110	5550	-8.13	-8.19	-5.15	0.31	-3.01
134	5670	-7.82	-8.63	-5.20	0.30	-3.01
151	5755	15.84	15.43	18.65	73.28	30.00
159	5795	14.67	14.61	17.65	58.22	30.00

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	8.71	7.73	11.26	13.36	19.99
58	5290	-6.20	-6.58	-3.38	0.46	-3.01
106	5530	-5.97	-6.15	-3.05	0.50	-3.01
122	5610	-5.95	-6.42	-3.17	0.48	-3.01
155	5775	13.94	13.91	16.94	49.38	30.00

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
50	5250	-7.43	-8.22	-4.80	0.33	-3.01
114	5570	-7.37	-8.31	-4.80	0.33	-3.01

<PINE_Omni antenna>
CDD
<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	17.42	16.90	20.18	104.19	26.00	20.14	21.00
40	5200	17.60	17.17	20.40	109.66	26.00	20.36	21.00
48	5240	17.51	17.09	20.32	107.53	26.00	20.28	21.00
52	5260	11.72	10.94	14.36	27.28	20.00	-	-
60	5300	11.89	11.47	14.70	29.48	20.00	-	-
64	5320	11.71	11.43	14.58	28.72	20.00	-	-
100	5500	11.01	11.30	14.17	26.11	20.00	-	-
116	5580	11.60	11.48	14.55	28.51	20.00	-	-
140	5700	12.04	11.50	14.79	30.12	20.00	-	-
149	5745	22.84	22.72	25.79	379.38	26.00	-	-
157	5785	22.53	23.35	25.97	395.33	26.00	-	-
165	5825	22.05	22.25	25.16	328.20	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(20.38) = 24.09 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(20.50) = 24.12 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(20.42) = 24.10 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(20.42) = 24.10 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(20.42) = 24.10 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(20.50) = 24.12 \text{ dBm} > 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	17.75	17.01	20.41	109.80	26.00	20.37	21.00
40	5200	17.72	17.28	20.52	112.61	26.00	20.48	21.00
48	5240	17.69	17.15	20.44	110.63	26.00	20.40	21.00
52	5260	12.43	11.66	15.07	32.15	20.00	-	-
60	5300	12.05	11.51	14.80	30.19	20.00	-	-
64	5320	11.79	11.55	14.68	29.39	20.00	-	-
100	5500	11.03	11.46	14.26	26.67	20.00	-	-
116	5580	11.68	11.62	14.66	29.24	20.00	-	-
140	5700	12.13	11.59	14.88	30.75	20.00	-	-
149	5745	22.77	22.36	25.58	361.42	26.00	-	-
157	5785	22.52	23.04	25.80	380.02	26.00	-	-
165	5825	21.42	21.53	24.49	280.91	26.00	-	-

<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	17.83	17.05	20.47	111.37	26.00	20.43	21.00
46	5230	18.01	17.29	20.68	116.82	26.00	20.64	21.00
54	5270	14.65	14.44	17.56	56.97	20.00	-	-
62	5310	14.94	14.26	17.62	57.86	20.00	-	-
102	5510	14.25	14.48	17.38	54.66	20.00	-	-
110	5550	14.76	14.57	17.68	58.56	20.00	-	-
134	5670	14.88	14.74	17.82	60.55	20.00	-	-
151	5755	22.48	22.12	25.31	339.94	26.00	-	-
159	5795	22.59	22.93	25.77	377.89	26.00	-	-

<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	17.82	17.05	20.46	111.23	26.00	20.42	21.00
40	5200	17.88	17.36	20.64	115.83	26.00	20.60	21.00
48	5240	17.82	17.29	20.57	114.11	26.00	20.53	21.00
52	5260	12.51	11.77	15.17	32.86	20.00	-	-
60	5300	12.12	11.59	14.87	30.71	20.00	-	-
64	5320	11.90	11.63	14.78	30.04	20.00	-	-
100	5500	11.12	11.58	14.37	27.33	20.00	-	-
116	5580	11.78	11.77	14.79	30.10	20.00	-	-
140	5700	12.22	11.75	15.00	31.63	20.00	-	-
149	5745	22.85	22.43	25.66	367.74	26.00	-	-
157	5785	22.61	23.12	25.88	387.51	26.00	-	-
165	5825	21.51	21.66	24.60	288.13	26.00	-	-

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	17.92	17.16	20.57	113.94	26.00	20.53	21.00
46	5230	18.06	17.38	20.74	118.68	26.00	20.70	21.00
54	5270	14.77	14.52	17.66	58.31	20.00	-	-
62	5310	15.02	14.31	17.69	58.75	20.00	-	-
102	5510	14.33	14.52	17.44	55.42	20.00	-	-
110	5550	14.85	14.69	17.78	59.99	20.00	-	-
134	5670	14.97	14.89	17.94	62.24	20.00	-	-
151	5755	22.55	22.23	25.40	347.00	26.00	-	-
159	5795	22.67	23.04	25.87	386.30	26.00	-	-

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	18.12	17.44	20.80	120.33	26.00	20.76	21.00
58	5290	16.77	16.46	19.63	91.79	20.00	-	-
106	5530	16.69	16.73	19.72	93.76	20.00	-	-
122	5610	16.50	16.52	19.52	89.54	20.00	-	-
155	5775	21.11	21.46	24.30	269.08	26.00	-	-

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	15.46	14.83	18.17	65.56	20.00	18.13	21.00
114	5570	14.79	14.85	17.83	60.68	20.00	-	-

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	17.93	17.14	20.56	113.85	26.00	20.52	21.00
40	5200	17.95	17.49	20.74	118.48	26.00	20.70	21.00
48	5240	17.91	17.40	20.67	116.76	26.00	20.63	21.00
52	5260	12.60	11.86	15.26	33.54	20.00	-	-
60	5300	12.19	11.71	14.97	31.38	20.00	-	-
64	5320	12.01	11.70	14.87	30.68	20.00	-	-
100	5500	11.24	11.71	14.49	28.13	20.00	-	-
116	5580	11.87	11.82	14.86	30.59	20.00	-	-
140	5700	12.34	11.83	15.10	32.38	20.00	-	-
149	5745	22.97	22.56	25.78	378.45	26.00	-	-
157	5785	22.68	23.19	25.95	393.80	26.00	-	-
165	5825	21.63	21.75	24.70	295.17	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(22.50) = 24.52 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(22.62) = 24.54 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(22.62) = 24.54 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(22.38) = 24.50 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(22.34) = 24.49 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(22.54) = 24.53 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	18.01	17.24	20.65	116.21	26.00	20.61	21.00
46	5230	18.14	17.50	20.84	121.40	26.00	20.80	21.00
54	5270	14.86	14.57	17.73	59.26	20.00	-	-
62	5310	15.08	14.40	17.76	59.75	20.00	-	-
102	5510	14.39	14.63	17.52	56.52	20.00	-	-
110	5550	14.96	14.78	17.88	61.39	20.00	-	-
134	5670	15.04	14.96	18.01	63.25	20.00	-	-
151	5755	22.66	22.31	25.50	354.72	26.00	-	-
159	5795	22.73	23.13	25.94	393.09	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(40.52) = 27.08 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.52) = 27.08 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.36) = 27.06 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(40.44) = 27.07 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	18.23	17.58	20.93	123.81	26.00	20.89	21.00
58	5290	16.84	16.56	19.71	93.60	20.00	-	-
106	5530	16.78	16.85	19.83	96.06	20.00	-	-
122	5610	16.63	16.60	19.63	91.73	20.00	-	-
155	5775	21.20	21.52	24.37	273.73	26.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(82.16) = 30.15 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(81.68) = 30.12 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.84) = 30.13 \text{ dBm} > 24 \text{ dBm}$.

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	15.57	14.92	18.27	67.10	20.00	18.23	21.00
114	5570	14.88	14.91	17.91	61.74	20.00	-	-

Note:
For U-NII-2A, U-NII-2C Band:

1. $11 \text{ dBm} + 10\log(81.52) = 30.11 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(164.32) = 33.16 \text{ dBm} > 24 \text{ dBm}$.

Beamforming
<802.11ac VHT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	14.81	14.04	17.45	55.62	22.99	17.41	21.00
40	5200	14.87	14.35	17.63	57.92	22.99	17.59	21.00
48	5240	14.81	14.28	17.56	57.06	22.99	17.52	21.00
52	5260	9.50	8.76	12.16	16.43	16.99	-	-
60	5300	9.11	8.58	11.86	15.36	16.99	-	-
64	5320	8.89	8.62	11.77	15.02	16.99	-	-
100	5500	8.11	8.57	11.36	13.67	16.99	-	-
116	5580	8.77	8.76	11.78	15.05	16.99	-	-
140	5700	9.21	8.74	11.99	15.82	16.99	-	-
149	5745	19.84	19.42	22.65	183.88	22.99	-	-
157	5785	19.60	20.11	22.87	193.77	22.99	-	-
165	5825	18.50	18.65	21.59	144.08	22.99	-	-

<802.11ac VHT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	14.91	14.15	17.56	56.98	22.99	17.52	21.00
46	5230	15.05	14.37	17.73	59.34	22.99	17.69	21.00
54	5270	11.76	11.51	14.65	29.15	16.99	-	-
62	5310	12.01	11.30	14.68	29.38	16.99	-	-
102	5510	11.32	11.51	14.43	27.71	16.99	-	-
110	5550	11.84	11.68	14.77	30.00	16.99	-	-
134	5670	11.96	11.88	14.93	31.12	16.99	-	-
151	5755	19.54	19.22	22.39	173.51	22.99	-	-
159	5795	19.66	20.03	22.86	193.16	22.99	-	-

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	15.11	14.43	17.79	60.17	22.99	17.75	21.00
58	5290	13.76	13.45	16.62	45.90	16.99	-	-
106	5530	13.68	13.72	16.71	46.89	16.99	-	-
122	5610	13.49	13.51	16.51	44.77	16.99	-	-
155	5775	18.10	18.45	21.29	134.55	22.99	-	-

<802.11ac VHT160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	12.45	11.82	15.16	32.78	16.99	15.12	21.00
114	5570	11.78	11.84	14.82	30.34	16.99	-	-

<802.11ax HE20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
36	5180	14.92	14.13	17.55	56.93	22.99	17.51	21.00
40	5200	14.94	14.48	17.73	59.24	22.99	17.69	21.00
48	5240	14.90	14.39	17.66	58.38	22.99	17.62	21.00
52	5260	9.59	8.85	12.25	16.77	16.99	-	-
60	5300	9.18	8.70	11.96	15.69	16.99	-	-
64	5320	9.00	8.69	11.86	15.34	16.99	-	-
100	5500	8.23	8.70	11.48	14.07	16.99	-	-
116	5580	8.86	8.81	11.85	15.29	16.99	-	-
140	5700	9.33	8.82	12.09	16.19	16.99	-	-
149	5745	19.96	19.55	22.77	189.24	22.99	-	-
157	5785	19.67	20.18	22.94	196.91	22.99	-	-
165	5825	18.62	18.74	21.69	147.59	22.99	-	-

<802.11ax HE40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
38	5190	15.00	14.23	17.64	58.11	22.99	17.60	21.00
46	5230	15.13	14.49	17.83	60.70	22.99	17.79	21.00
54	5270	11.85	11.56	14.72	29.63	16.99	-	-
62	5310	12.07	11.39	14.75	29.88	16.99	-	-
102	5510	11.38	11.62	14.51	28.26	16.99	-	-
110	5550	11.95	11.77	14.87	30.70	16.99	-	-
134	5670	12.03	11.95	15.00	31.63	16.99	-	-
151	5755	19.65	19.30	22.49	177.37	22.99	-	-
159	5795	19.72	20.12	22.93	196.56	22.99	-	-

<802.11ax HE80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
42	5210	15.22	14.57	17.92	61.91	22.99	17.88	21.00
58	5290	13.83	13.55	16.70	46.80	16.99	-	-
106	5530	13.77	13.84	16.82	48.03	16.99	-	-
122	5610	13.62	13.59	16.62	45.87	16.99	-	-
155	5775	18.19	18.51	21.36	136.88	22.99	-	-

<802.11ax HE160>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)	EIRP Power (dBm)	EIRP Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)			
50	5250	12.56	11.91	15.26	33.55	16.99	15.22	21.00
114	5570	11.87	11.90	14.90	30.87	16.99	-	-

5.1.3 Transmit Power Control (TPC)

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p of less than 500 mW.

Maximum EIRP of this device is 990.83 mW which is greater than 500mW, therefore TPC function is required.


TPC	E.I.R.P	15.407(h)(1)
V	> 500mW	The TPC mechanism is required for system with an E.I.R.P. of above 500mW
	< 500mW	-

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 61 von 256
 Page 61 of 256

5.1.4 26 dB Bandwidth and 99% Occupied Bandwidth

Kind of Test Site Shielded room

Test Setup

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101513	2023/05/10	2024/05/09	2023/9/15	2023/11/2
Thermal Chamber	Giant Force	GHT-150-40-CP-SD	MAA1902-011	2023/04/10	2024/04/09	2023/9/15	2023/11/2

Test Procedure

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- f. For 99% Bandwidth Measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results


Please refer to Appendix A

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 62 von 256
 Page 62 of 256

5.1.5 6 dB Bandwidth (5725-5850MHz)

Kind of Test Site Shielded room

Test Setup

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101513	2023/05/10	2024/05/09	2023/9/15	2023/11/2
Thermal Chamber	Giant Force	GHT-150-40-CP-SD	MAA1902-011	2023/04/10	2024/04/09	2023/9/15	2023/11/2

Test Procedure
MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test Results

Please refer to Appendix A

5.1.6 Frequency Stability Measurement

Kind of Test Site Shielded room

Test Setup

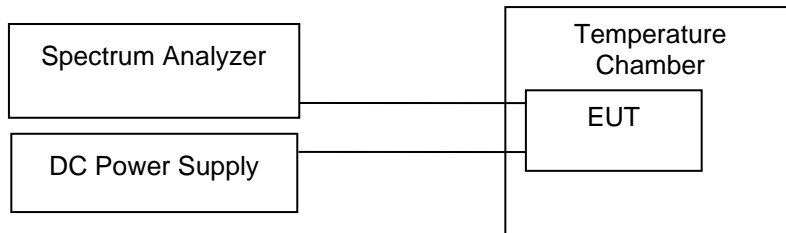

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101513	2023/05/10	2024/05/09	2023/9/15	2023/11/2
Thermal Chamber	Giant Force	GHT-150-40-CP-SD	MAA1902-011	2023/04/10	2024/04/09	2023/9/15	2023/11/2

Test Procedure

- a. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- b. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- c. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 64 von 256
 Page 64 of 256

Test Results
<Spruce>

Frequency (MHz)	5180			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
132	5180.00318			0.614
120	5180.0026			0.502
108	5180.00318			0.614
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5180.00289	5179.9711	5179.99305	5179.98987
40	5180.005448	5180.007824	5180.003902	5180.005813
30	5180.007182	5180.006305	5180.008582	5180.005626
20	5180.0026	5180.00203	5180.00174	5180.0087
10	5180.007562	5180.017995	5180.008164	5180.014728
0	5180.030789	5180.035291	5180.029801	5180.020664
-10	5180.032358	5180.024435	5180.026965	5180.021813
-20	5180.03792	5180.03763	5180.03676	5180.03502
Max. Deviation (ppm)	7.320	7.264	7.097	6.761

<PINE>

Frequency (MHz)	5180			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
132	5180.00637			1.230
120	5180.00608			1.174
108	5180.00695			1.342
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5179.99392	5179.99247	5179.99219	5179.9919
40	5179.994547	5180.00311	5179.995073	5179.994751
30	5180.001364	5179.999839	5179.994882	5179.99915
20	5180.00608	5180.00521	5180.00463	5180.00376
10	5180.031499	5180.025424	5180.012668	5180.056628
0	5180.033801	5180.015031	5180.055908	5180.054665
-10	5180.030542	5180.028406	5180.007868	5180.008003
-20	5180.06715	5180.06831	5180.06802	5180.06802
Max. Deviation (ppm)	12.963	13.187	13.131	13.131

5.1.7 Power Spectral Density

Limit

For the 5.15~5.25GHz Bands:

For mobile and portable client devices in the 5.15~5.25GHz band, the Maximum Power spectral density shall not exceed 11dBm/MHz. For an indoor access point operating in the band 5.15~5.25GHz, the maximum power spectral density shall not exceed 17dBm/MHz.

For the 5.25~5.35GHz and 5.47~5.725GHz Bands:


The maximum power spectral density shall not exceed 11dBm/MHz.

For the 5.745~5.85GHz Bands:

The maximum power spectral density shall not exceed 30dBm/500kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV	101513	2023/05/10	2024/05/09	2023/9/15	2023/11/2
Thermal Chamber	Giant Force	GHT-150-40-CP-SD	MAA1902-011	2023/04/10	2024/04/09	2023/9/15	2023/11/2

Prüfbericht - Nr.: CN23MIDW 001
*Test Report No.*Seite 66 von 256
Page 66 of 256**Test Procedure**

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

※**For U-NII-3:**

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 500 kHz, Set VBW \geq 3 RBW, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
4. Sweep time = auto, trigger set to "free run".
5. Trace average at least 100 traces in power averaging mode.
6. Record the max value and add 10 log (1/duty cycle)

For MIMO mode, calculation method follows FCC KDB 662911 Method 2) a) of power density measurement using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

Test Results

Please refer to Appendix A

5.1.8 Radiated Spurious Emissions

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.407(b).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

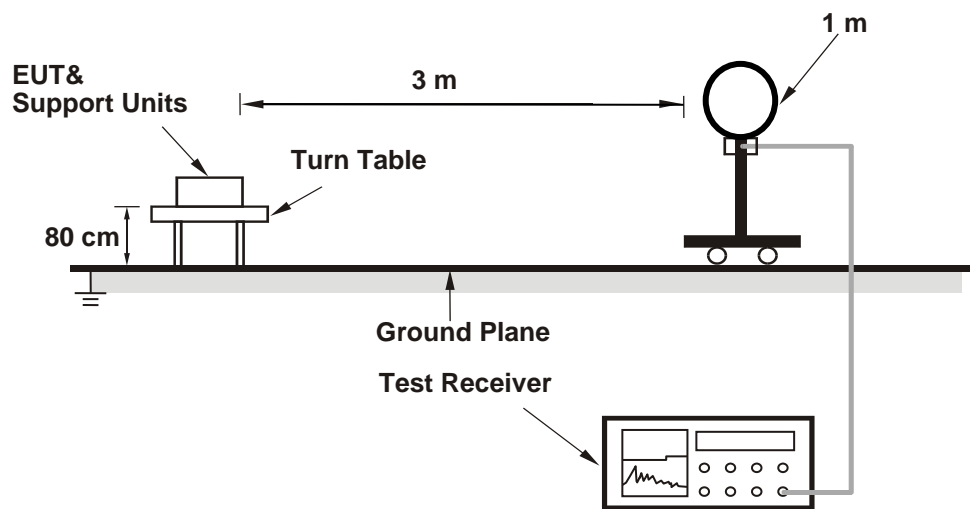

<Radiated Emissions 30 MHz to 1 GHz>

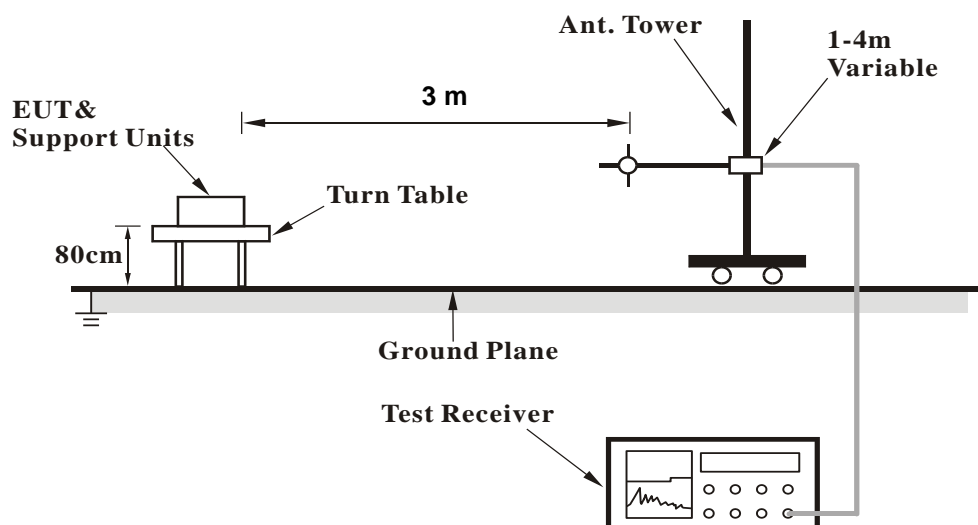

<Radiated Emissions above 1 GHz>

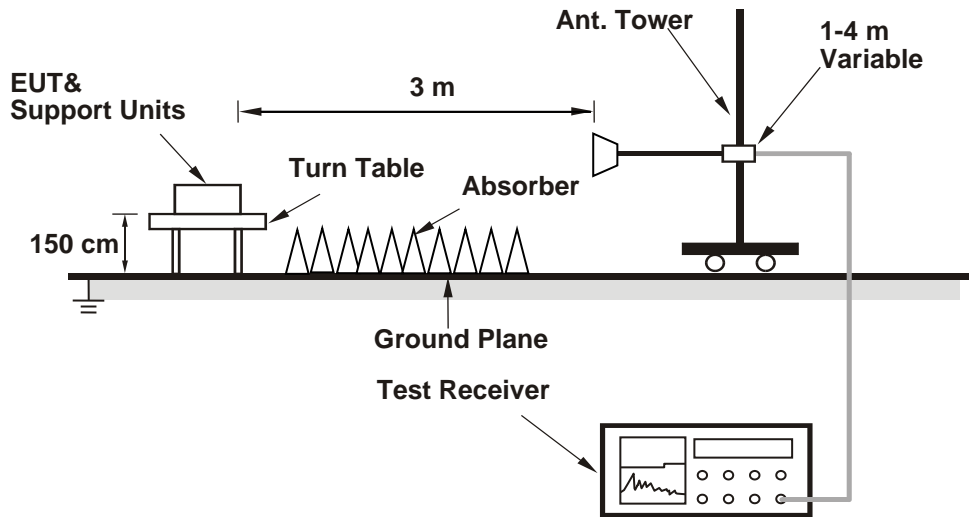

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 69 von 256
 Page 69 of 256

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Above 1 GHz					
Signal Analyzer	R&S	FSV40	101509	2023/4/26	2024/4/24
wideband radio communication tester	R&S	CMW500	166978	2023/4/20	2024/4/18
Horn Antenna	ETS-Lindgren	3117	00218930	2022/12/8	2023/12/7
HF-AMP + AC source	EMCI	EM01G18GA	980635	2023/2/16	2024/2/15
HF-AMP + AC source	EMCI	EMC184045SE	980656	2023/1/6	2024/1/5
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2023/5/4	2024/5/2
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
30 MHz ~ 1 GHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
wideband radio communication tester	R&S	CMW500	166978	2023/4/20	2024/4/18
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2023/3/31	2024/3/29
LF-AMP	Agilent	8447D	2727A05146	2023/2/16	2024/2/15
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A
Below 30 MHz					
Receiver	R&S	ESR7	102109	2023/2/24	2024/2/23
wideband radio communication tester	R&S	CMW500	166978	2023/4/20	2024/4/18
Loop Antenna	SCHWARZBECK	FMZB 1519B	00215	2023/1/4	2024/1/3
Test Software	Audix E3	15914a_20191106 tuv	PK-001087	N/A	N/A

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The emission levels of other frequencies (including the 10th harmonic of the highest fundamental frequency) are very lower than the limit and are not shown in the test report.

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.

Seite 71 von 256
Page 71 of 256

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)

Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 72 von 256
 Page 72 of 256

5.1.9 Dynamic Frequency Selection

Limit

<DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection>

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP ≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

<DFS Response Requirement Values>


Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time and the Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Kind of Test Site


Shielded room

Test Setup


<Setup for Master with injection at the Master>

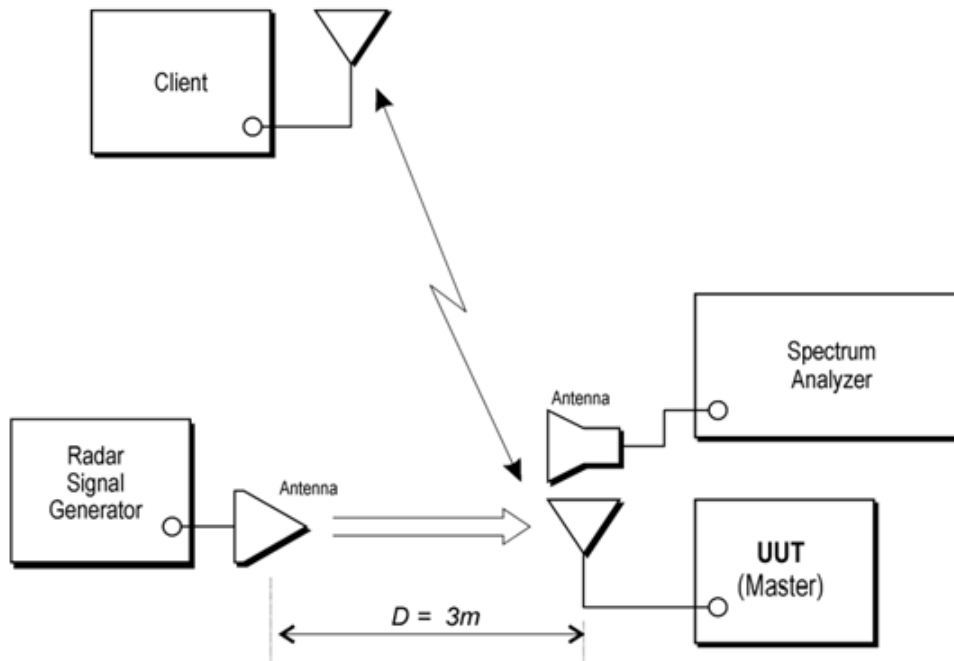

<Setup for Client with injection at the Master>

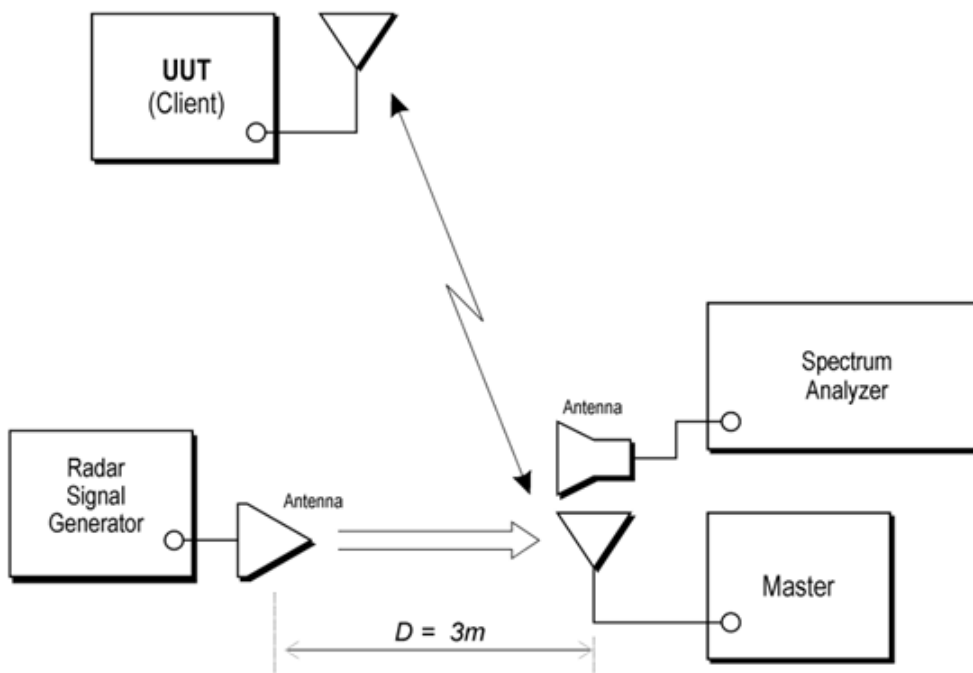

<Setup for Client with injection at the Client>

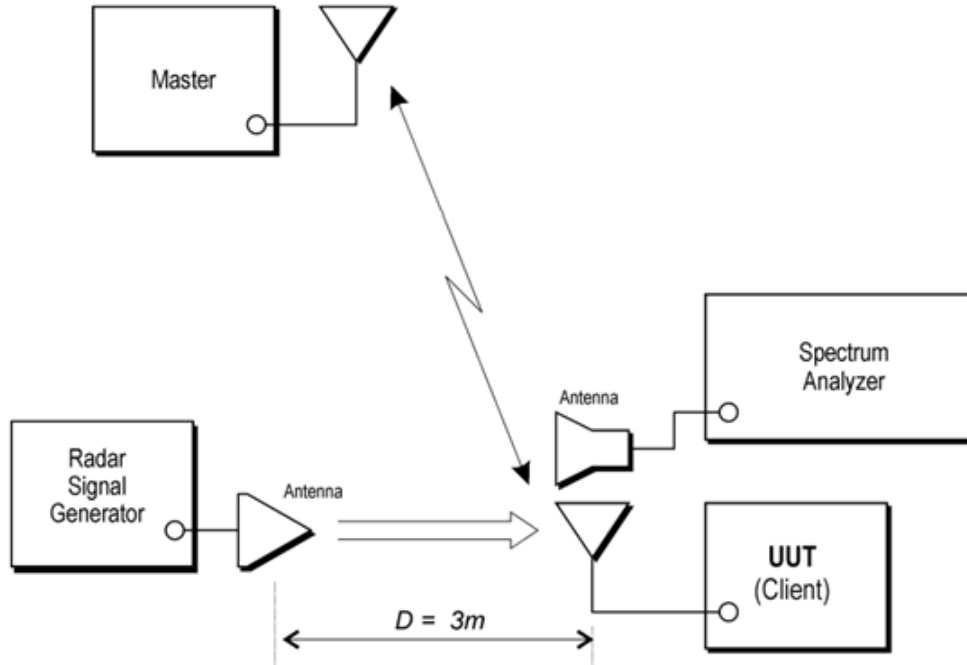

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY52221334	2023/3/16	2024/3/14	2023/9/16	2023/10/27
MXG Vector Signal Generator	Agilent	N5182B	MY53050524	2023/3/17	2024/3/15	2023/9/16	2023/10/27
Horn Antenna	SCHWARZBECK	9120D	1945	2023/7/21	2024/7/19	2023/9/16	2023/10/27

Requirement

<Applicability of DFS Requirements Prior to Use of a Channel>

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

<Applicability of DFS requirements during normal operation>


Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Channel Loading

<input type="checkbox"/>	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
<input type="checkbox"/>	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
<input checked="" type="checkbox"/>	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
<input type="checkbox"/>	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

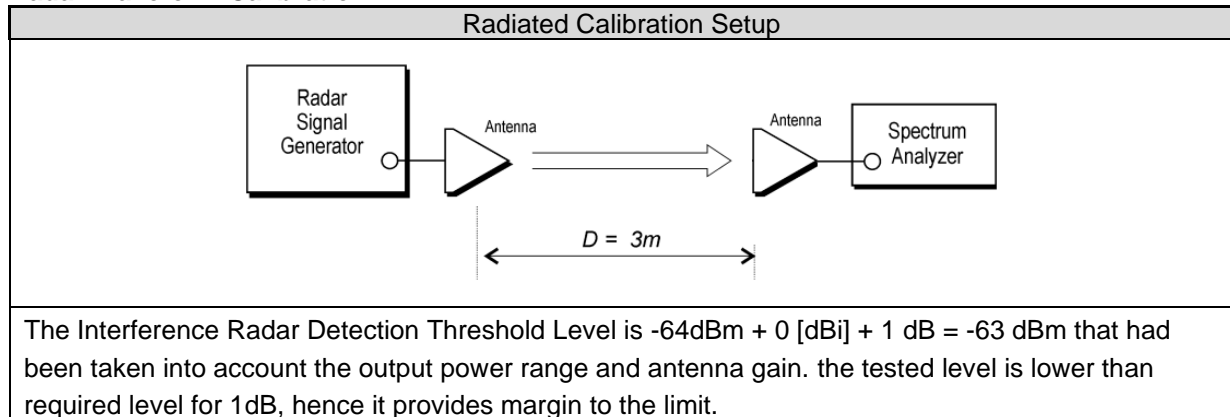Test Procedures
Radar Waveform Calibration

U-NII Detection Bandwidth

- a) Adjust the equipment to produce a single Burst of the Short Pulse Radar Types 0 at the center frequency of the UUT Operating Channel at the specified DFS Detection Threshold level.
- b) Set the UUT up as a standalone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
- c) Generate a single radar Burst, and note the response of the UUT. Repeat for a minimum of 10 trials. The UUT must detect the Radar Waveform within the DFS band using the specified U-NII Detection Bandwidth criterion. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
- d) Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in this section limit. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as FH) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above FH is not required to demonstrate compliance.
- e) Starting at the center frequency of the UUT operating Channel, decrease the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in this section limit. Repeat this measurement in 1MHz steps at frequencies 5 MHz above where the detection rate begins to fall. Record the lowest frequency (denote as FL) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below FL is not required to demonstrate compliance.
- f) The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = \text{FH} - \text{FL}$$

Channel Availability Check Time

<Initial Channel Availability Check Time>


This test does not use any Radar Waveforms and only needs to be performed one time.

- a) The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the UUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
- b) The UUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
- c) Confirm that the UUT initiates transmission on the channel.

< Radar Burst at the Beginning of the Channel Availability Check Time Measurement>

The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.


- a) The UUT is powered on at T_0 . T_1 denotes the instant when the UUT has completed its power-up sequence (T_{power_up}). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{ch_avail_check}$.
- b) A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at T_1 . An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- c) Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- d) Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

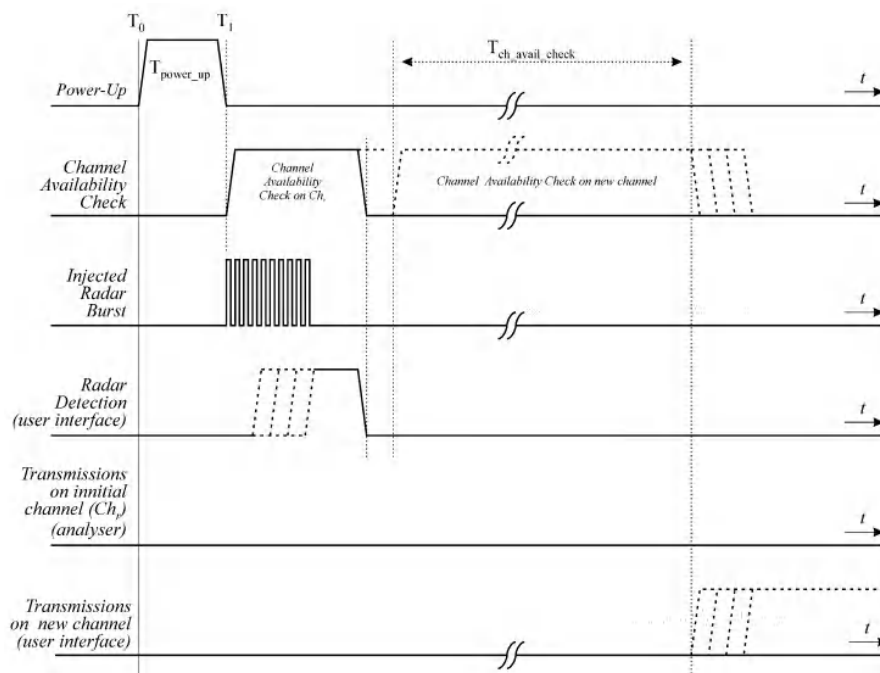

< Radar Burst at the End of the Channel Availability Check Time >


The steps below define the procedure to verify successful radar detection on the test Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1dB occurs at the end of the Channel Availability Check Time.

- The UUT is powered on at T_0 . T_1 denotes the instant when the UUT has completed its power-up sequence ($T_{\text{power_up}}$). The Channel Availability Check Time commences on Chr at instant T_1 and will end no sooner than $T_1 + T_{\text{ch_avail_check}}$.
- A single Burst of one of the Short Pulse Radar Types 0-4 will commence within a 6 second window starting at $T_1 + 54$ seconds. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- Visual indication or measured results on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of Chr for UUT emissions will continue for 2.5 minutes after the radar Burst has been generated.
- Verify that during the 2.5 minute measurement window no UUT transmissions occurred on Chr. The Channel Availability Check results will be recorded.

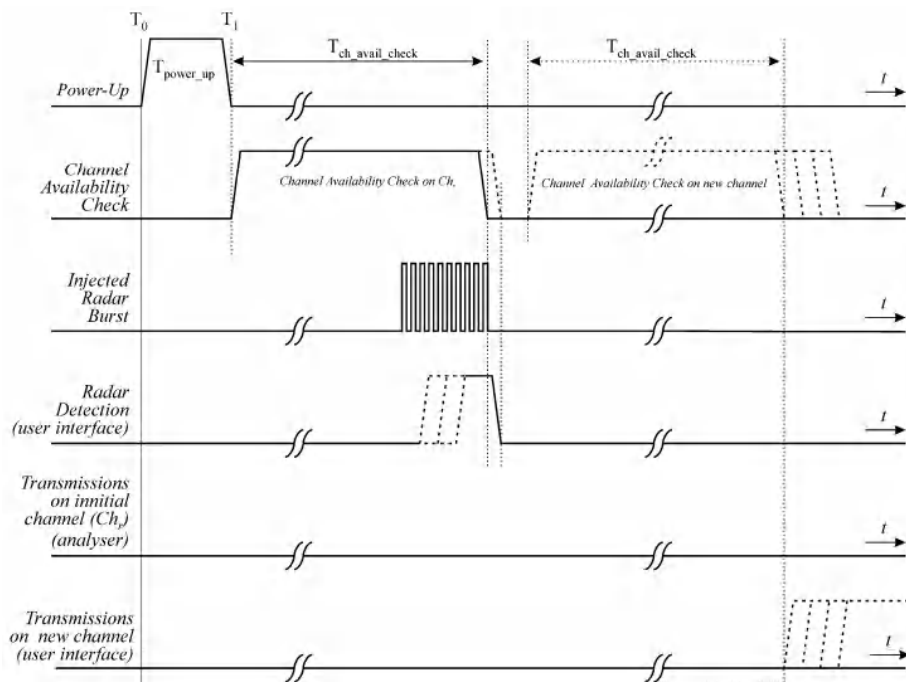

In-service Monitoring

- a) One frequency will be chosen from the Operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands. For 802.11 devices, the test frequency must contain control signals. This can be verified by disabling channel loading and monitoring the spectrum analyzer. If no control signals are detected, another frequency must be selected within the emission bandwidth where control signals are detected.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without DFS), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will *Associate* with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) Stream the channel loading test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
- d) At time T_0 the Radar Waveform generator sends a Burst of pulses for one of the Radar Type 0 at levels defined, on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- e) Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Measure and record the Channel Move Time and Channel Closing Transmission Time if radar detection occurs.
- f) When operating as a Master Device, monitor the UUT for more than 30 minutes following instant T_2 to verify that the UUT does not resume any transmissions on this Channel. Perform this test once and record the measurement result.
- g) In case the UUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps a) to f).

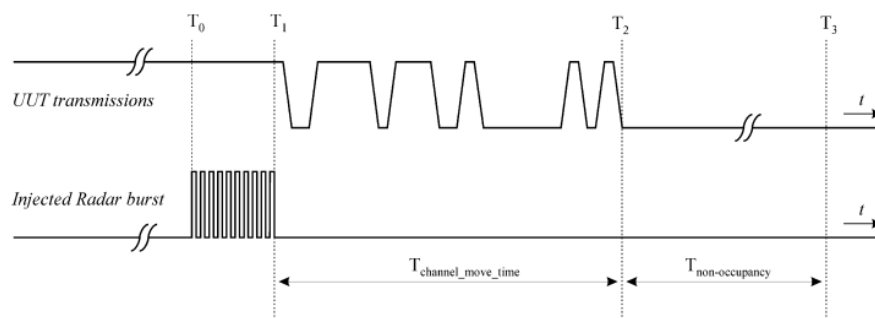


Statistical Performance Check




- a) One frequency will be chosen from the Operating Channels of the UUT within the 5250-5350 MHz or 5470-5725 MHz bands.
- b) In case the UUT is a U-NII device operating as a Client Device (with or without Radar Detection), a U-NII device operating as a Master Device will be used to allow the UUT (Client device) to Associate with the Master Device. In case the UUT is a Master Device, a U-NII device operating as a Client Device will be used and it is assumed that the Client will Associate with the UUT (Master). In both cases for conducted tests, the Radar Waveform generator will be connected to the Master Device. For radiated tests, the emissions of the Radar Waveform generator will be directed towards the Master Device. If the Master Device has antenna gain, the main beam of the antenna will be directed toward the radar emitter. Vertical polarization is used for testing.
- c) The TCP or UDP protocol unicast data stream was generated by the throughput software command line with at least 17% activity ratio over any 100ms period. Stream the channel loading traffic from the Master Device to the Client Device on the test Channel for the entire period of the test.
- d) At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1- 6, at DFS Detection Threshold level on the Operating Channel. An additional 1 dB is added to the radar test signal to ensure it is at or above the DFS Detection Threshold, accounting for equipment variations/errors.
- e) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
- f) Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
- g) In case the UUT is a U-NII device operating as a Client Device with In-Service Monitoring, perform steps a) to f).


Test Results


<Spruce>

<Radar Waveform calibration>

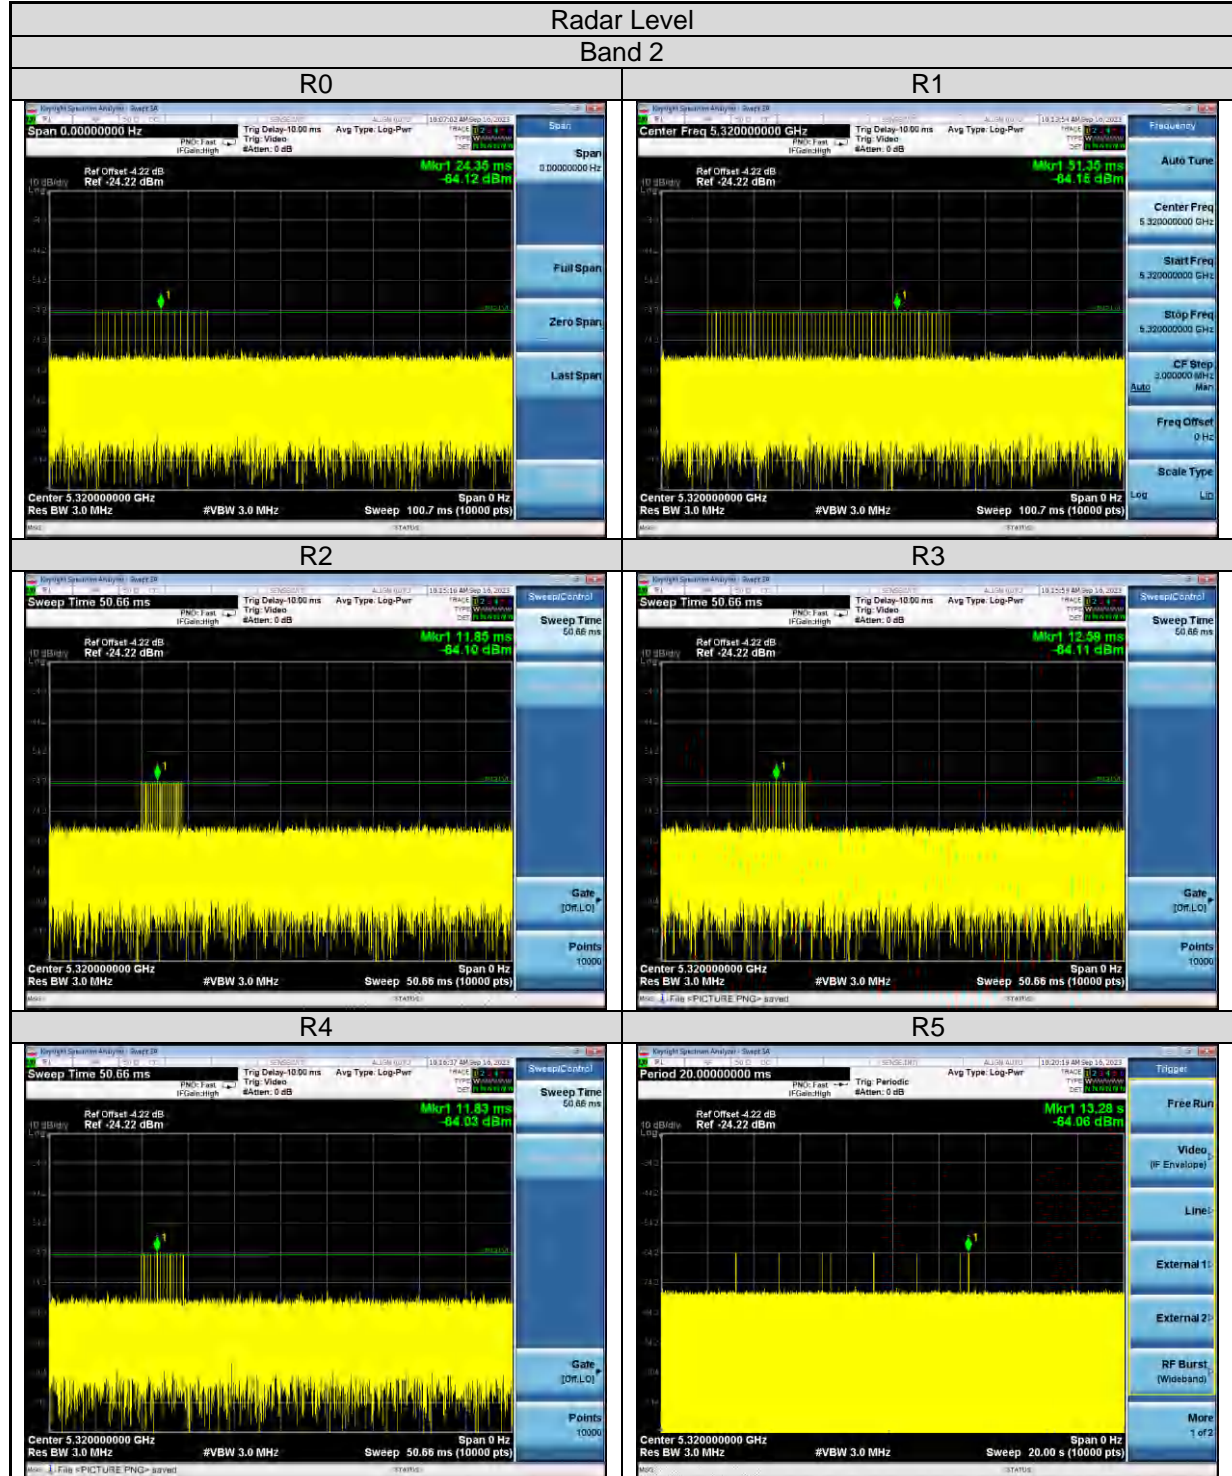

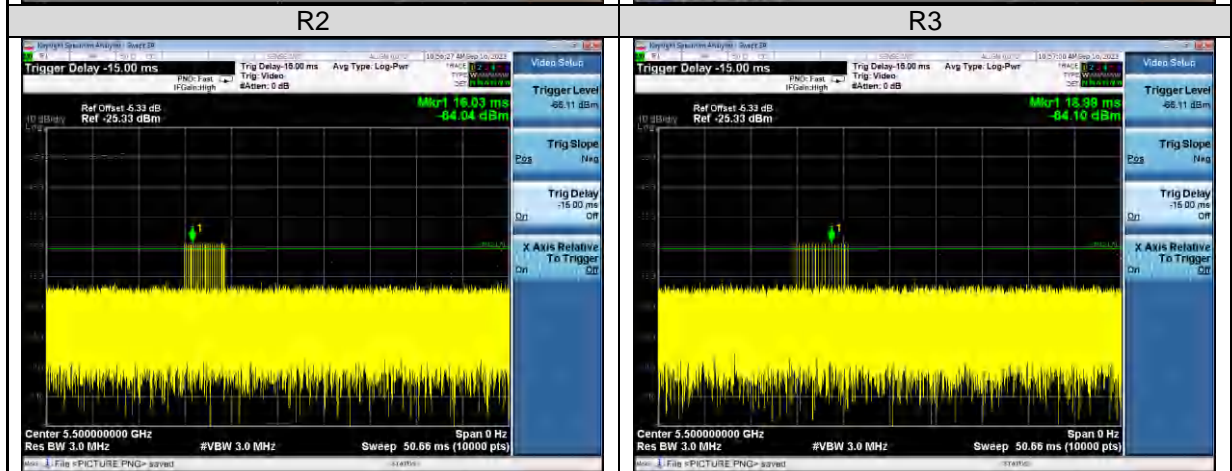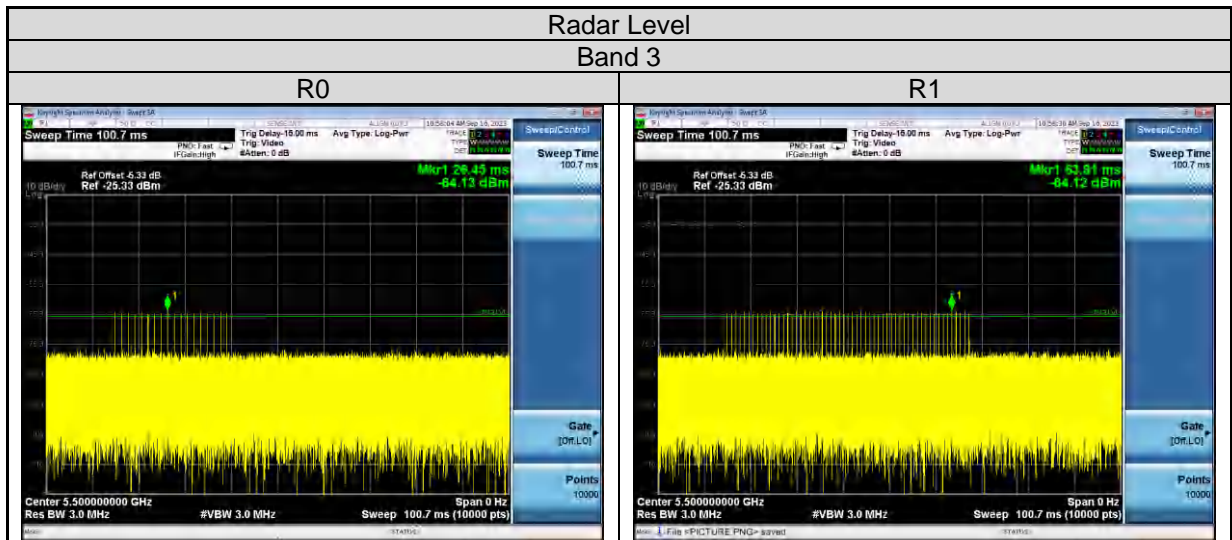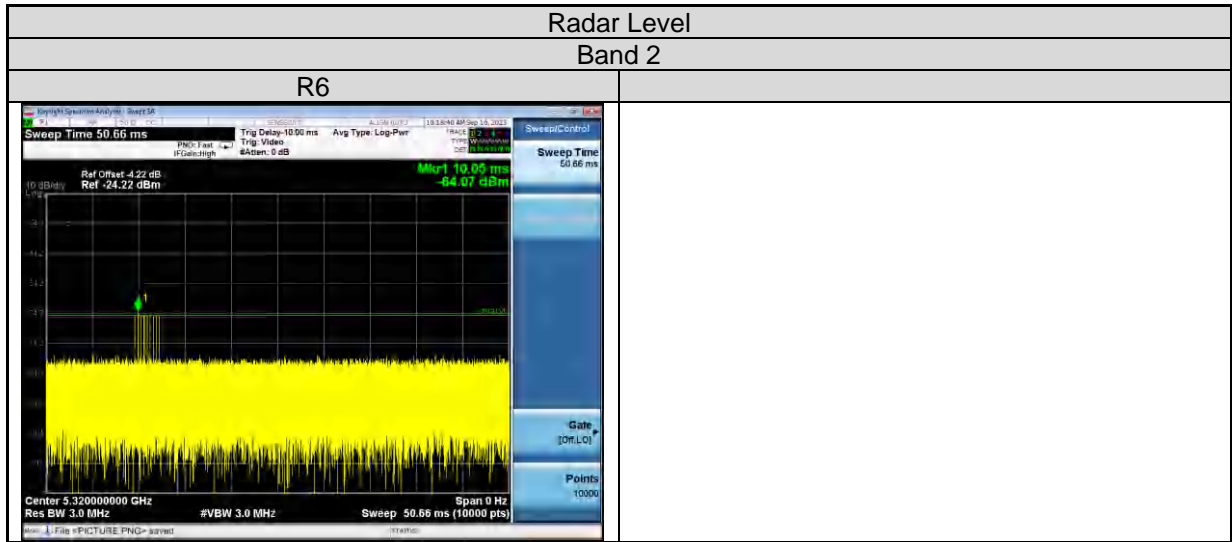

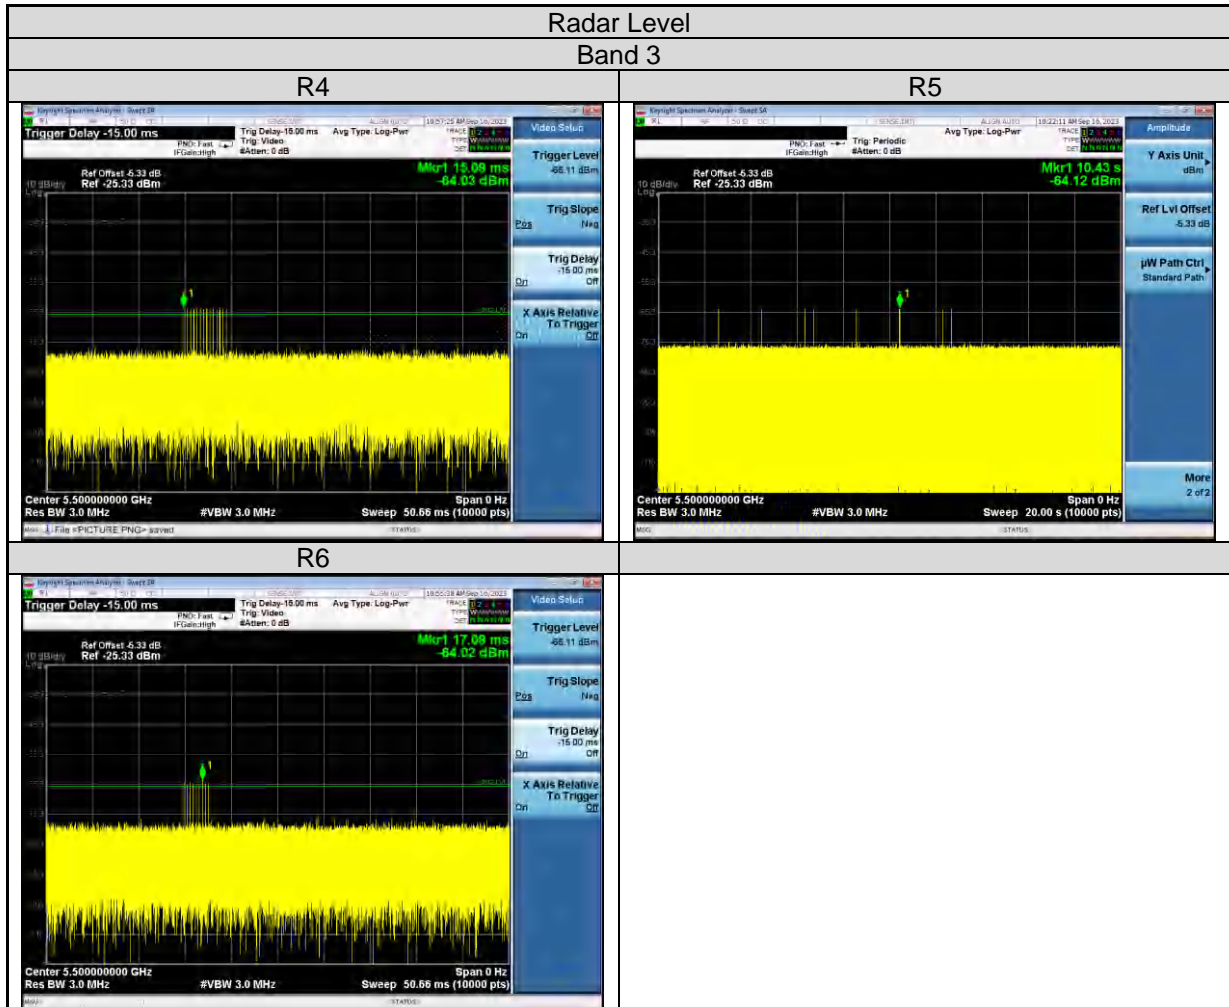

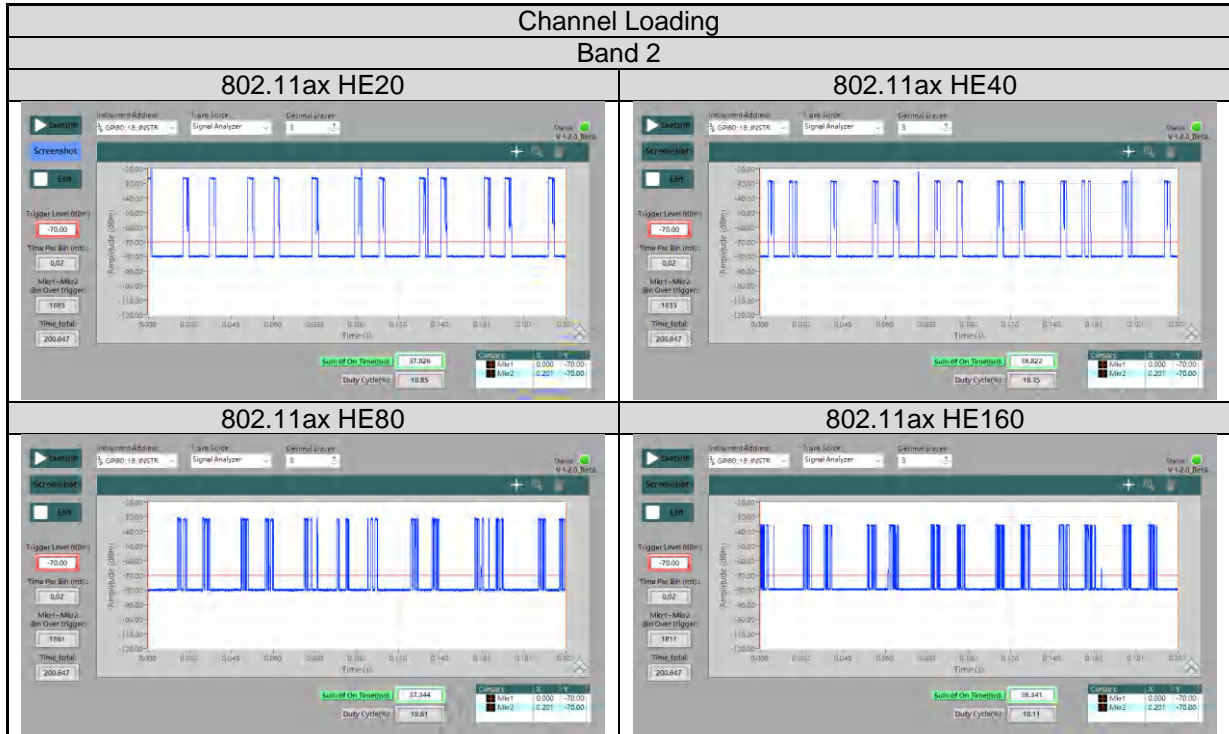


<802.11ax HE160 >

Channel Moving Time (CMT):

Radar Type	Channel (MHz)	Channel Move Time (s)	Limit (s)	Result
R0	5250	1.572	10	Pass
R0	5570	0.528	10	Pass


Channel Closing Transmission Time (CCTT):


Radar Type	Channel (MHz)	Channel Closing Transmission Time (s)	Limit (ms)	Result
R0	5250	0.014	< 60	Pass
R0	5570	0.012	< 60	Pass

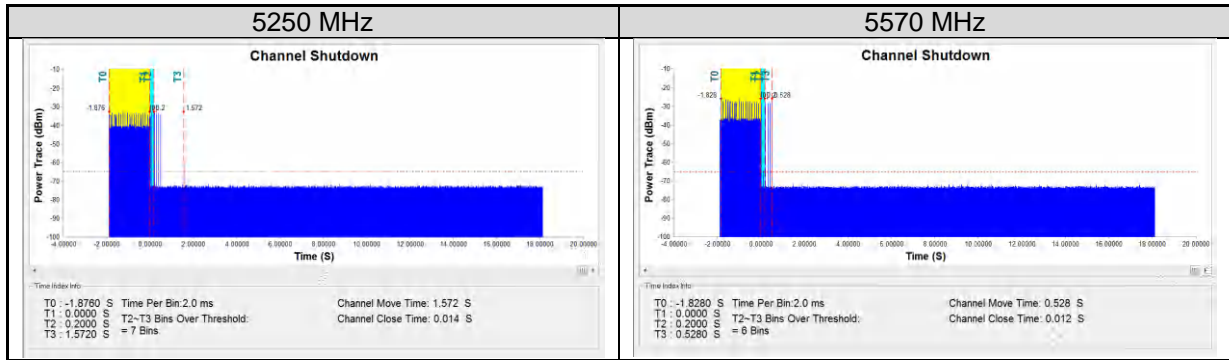

<802.11ax HE160 >

Non-occupancy period

Channel (MHz)	Limit (minute)	Result
5250	≥ 30	Pass
5570	≥ 30	Pass

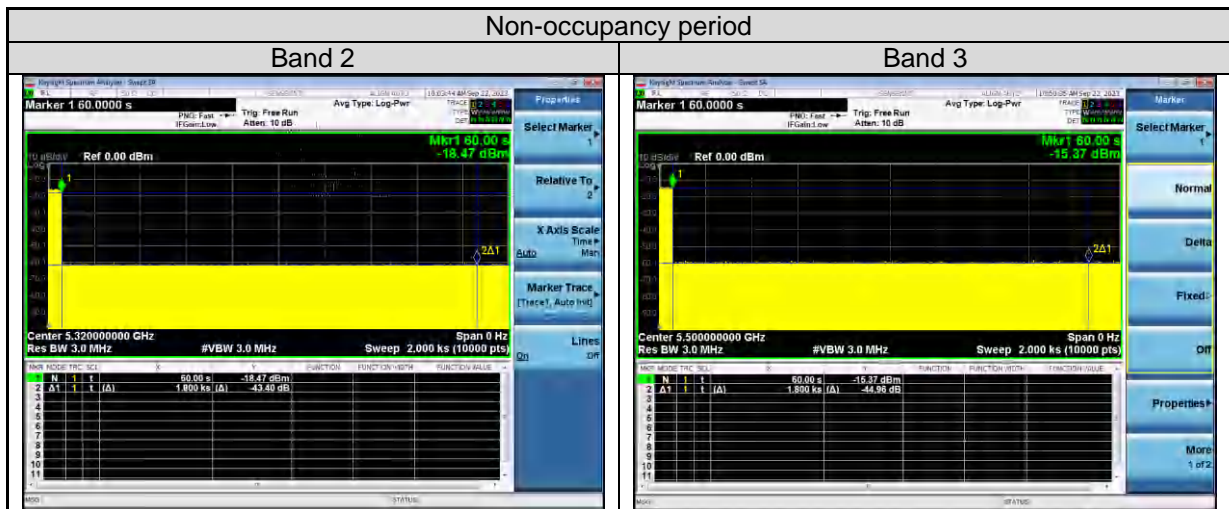

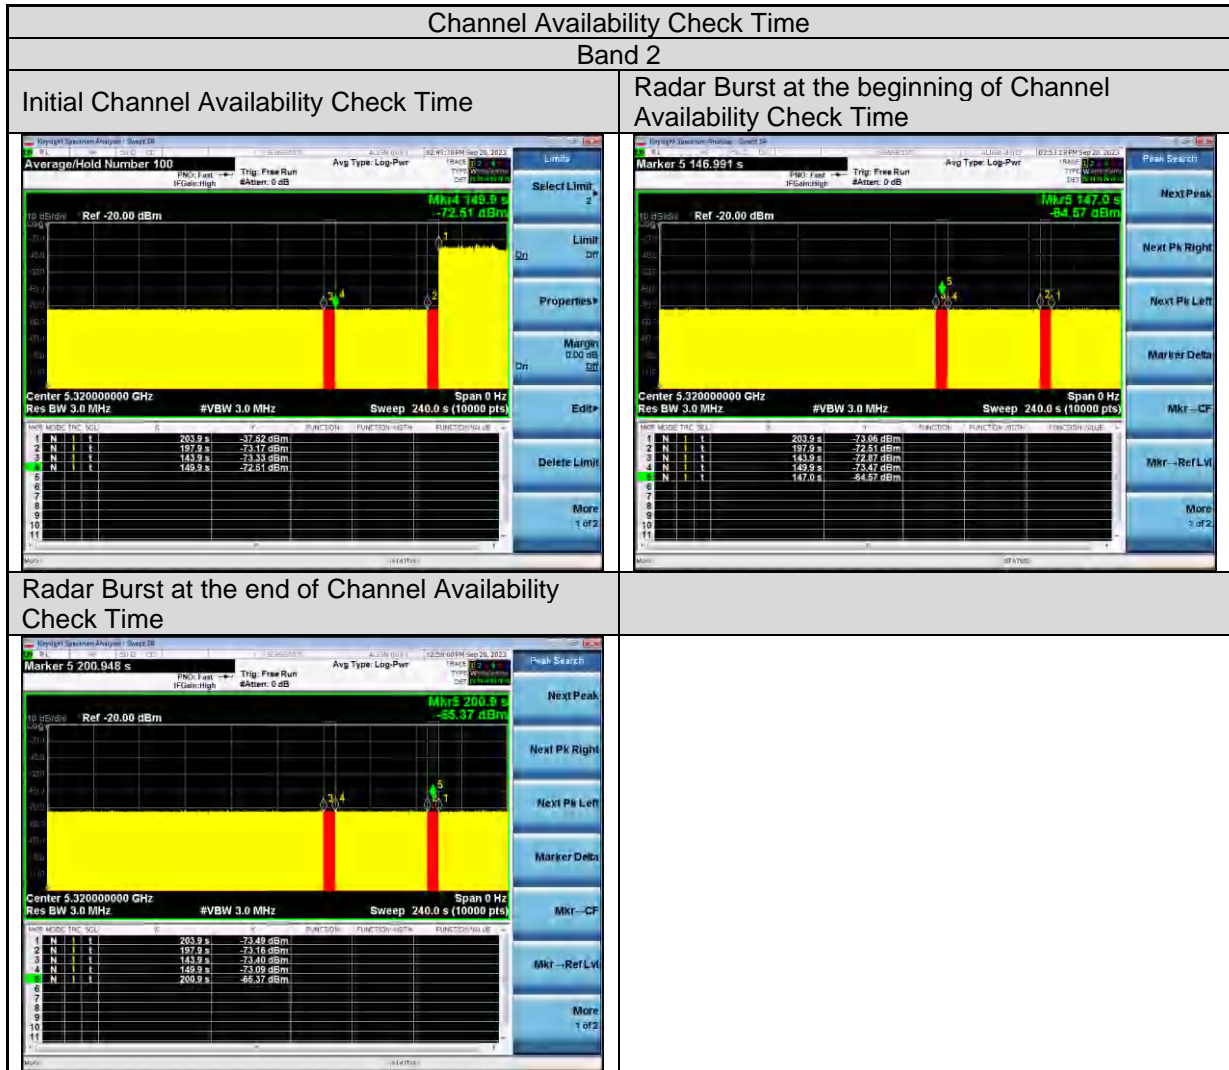

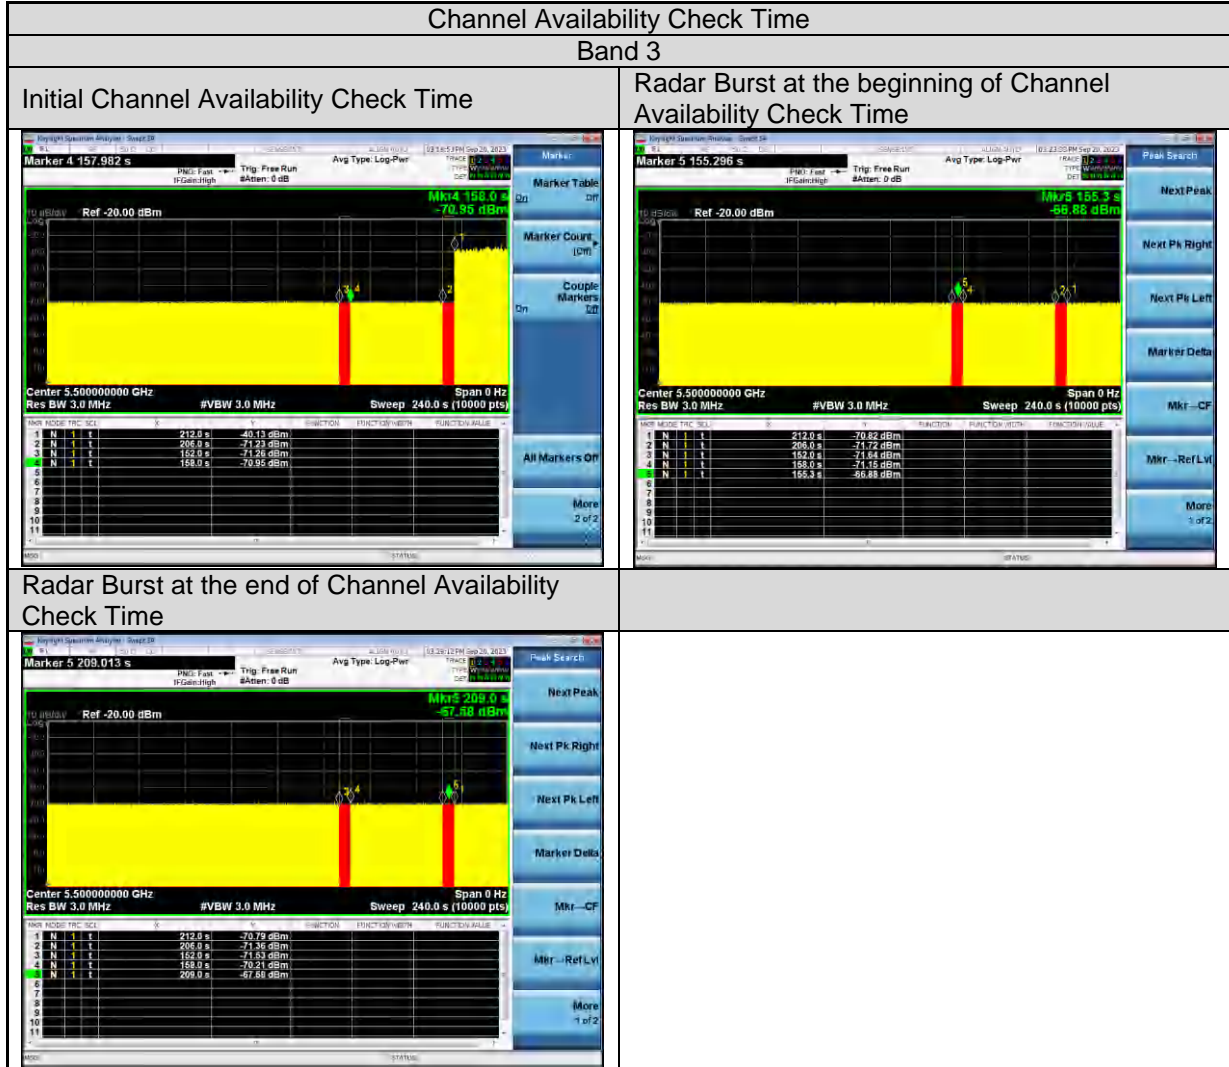

<U-NII Detection Bandwidth>

20 MHz Signal Bandwidth											
EUT Frequency = 5320MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5309	0	0	0	0	0	0	0	0	0	0	0%
5310(FL)	1	1	1	1	1	1	1	1	1	1	100%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	1	1	1	1	1	1	100%
5313	1	1	1	1	1	1	1	1	1	1	100%
5314	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	1	1	1	1	1	100%
5317	1	1	1	1	1	1	1	1	1	1	100%
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5321	1	1	1	1	1	1	1	1	1	1	100%
5322	1	1	1	1	1	1	1	1	1	1	100%
5323	1	1	1	1	1	1	1	1	1	1	100%
5324	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	1	1	1	1	1	1	1	1	1	1	100%
5327	1	1	1	1	1	1	1	1	1	1	100%
5328	1	1	1	1	1	1	1	1	1	1	100%
5329	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0%
20 MHz Detection Bandwidth = Fh - Fl = 5330MHz - 5310MHz = 20MHz											
EUT 99% Bandwidth = 19.21MHz											

20 MHz Signal Bandwidth											
EUT Frequency = 5500MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	0	0	0	0	0	0	0	0	0	0	0%
5490(FL)	1	1	1	1	1	1	1	1	1	1	100%
5491	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5496	1	1	1	1	1	1	1	1	1	1	100%
5497	1	1	1	1	1	1	1	1	1	1	100%
5498	1	1	1	1	1	1	1	1	1	1	100%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	1	1	1	1	1	1	100%
5502	1	1	1	1	1	1	1	1	1	1	100%
5503	1	1	1	1	1	1	1	1	1	1	100%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510(FH)	1	1	1	1	1	1	1	1	1	1	100%
5511	0	0	0	0	0	0	0	0	0	0	0%
20 MHz Detection Bandwidth = Fh - Fl = 5510MHz - 5490MHz = 20MHz											
EUT 99% Bandwidth = 19.04MHz											

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 91 von 256
 Page 91 of 256

5325	1	1	1	0	1	1	1	1	1	1	1	90%
5326	1	1	1	1	1	1	0	1	1	1	1	90%
5327	1	1	1	1	1	1	1	1	1	1	1	100%
5328	1	1	1	1	1	1	1	1	1	1	1	100%
5329	1	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0	0%

 40 MHz Detection Bandwidth = $F_h - F_l = 5330\text{MHz} - 5290\text{MHz} = 40\text{MHz}$

EUT 99% Bandwidth = 38.28MHz

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 93 von 256
 Page 93 of 256

5525	1	1	1	1	1	1	1	1	1	1	1	100%
5526	1	1	1	1	1	1	1	1	1	1	1	100%
5527	1	1	1	1	1	1	1	1	1	1	1	100%
5528	1	1	1	1	1	1	1	1	1	1	1	100%
5529	1	1	1	1	1	1	1	1	1	1	1	100%
5530(FH)	1	1	1	1	1	1	1	1	1	1	1	100%
5531	0	0	0	0	0	0	0	0	0	0	0	0%

 40 MHz Detection Bandwidth = $F_h - F_l = 5530\text{MHz} - 5490\text{MHz} = 40\text{MHz}$

EUT 99% Bandwidth = 38.07MHz

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 96 von 256
 Page 96 of 256

5328	1	1	1	1	0	1	1	1	1	1	90%
5329	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	0	1	1	1	1	1	1	1	90%
5331	0	0	0	0	0	0	0	0	0	0	0%
80 MHz Detection Bandwidth = $F_h - F_l = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$											
EUT 99% Bandwidth = 77.61MHz											

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 99 von 256
 Page 99 of 256

5568	1	1	1	1	1	1	1	1	1	1	100%
5569	1	1	1	1	1	1	1	1	1	1	100%
5570(FH)	1	1	1	1	1	1	1	1	1	1	100%
5571	0	0	0	0	0	0	0	0	0	0	0%
80 MHz Detection Bandwidth = $F_h - F_l = 5570\text{MHz} - 5490\text{MHz} = 80\text{MHz}$											
EUT 99% Bandwidth = 77.56MHz											

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

5286	1	1	1	1	1	1	1	1	1	1	100%
5287	1	1	1	1	1	1	1	1	1	1	100%
5288	1	1	1	1	1	1	1	1	1	1	100%
5289	1	1	1	1	1	1	1	1	1	1	100%
5290	1	1	1	1	1	1	1	1	1	1	100%
5291	1	1	1	1	1	1	1	1	1	1	100%
5292	1	1	1	1	1	1	1	1	1	1	100%
5293	1	1	1	1	1	1	1	1	1	1	100%
5294	1	1	1	1	1	1	1	1	1	1	100%
5295	1	1	1	1	1	1	1	1	1	1	100%
5296	1	1	1	1	1	1	1	1	1	1	100%
5297	1	1	1	0	1	1	1	1	1	1	90%
5298	1	1	1	1	1	1	1	1	1	1	100%
5299	0	1	1	1	1	1	1	1	1	1	90%
5300	1	1	1	1	1	1	1	1	1	1	100%
5301	1	1	1	1	1	0	1	1	1	1	90%
5302	1	1	1	1	1	1	1	1	0	1	90%
5303	1	1	1	1	1	1	1	1	1	1	100%
5304	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	1	1	1	1	1	100%
5306	1	0	1	1	1	1	1	1	1	1	90%
5307	1	1	1	1	1	1	1	1	1	1	100%
5308	1	1	1	1	1	1	1	1	1	1	100%
5309	1	0	1	1	1	1	1	1	1	1	90%
5310	0	1	1	1	1	1	1	1	1	1	90%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	1	1	1	1	1	1	100%
5313	1	1	1	1	1	1	1	1	1	1	100%
5314	1	1	1	1	0	1	1	1	1	1	90%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	0	1	1	1	1	90%
5317	1	1	1	1	1	1	1	1	1	1	100%
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5321	1	1	1	1	1	0	1	1	1	1	90%
5322	1	1	1	1	1	1	1	1	1	1	100%
5323	1	1	1	1	1	1	1	1	1	0	90%
5324	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	1	1	1	1	1	1	1	1	1	1	100%
5327	1	1	1	0	1	1	1	1	1	1	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 102 von 256
 Page 102 of 256

5328	1	1	1	1	1	1	1	1	1	1	1	100%
5329	1	1	1	1	1	1	0	1	1	1	1	90%
5330(HF)	1	1	1	1	1	1	1	1	0	1	1	90%
5331	0	0	0	0	0	0	0	0	0	0	0	0%
160 MHz Detection Bandwidth = $F_h - F_l = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$												
EUT 99% Bandwidth = 156.7MHz												

160 MHz Signal Bandwidth											
EUT Frequency = 5570MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	0	0	0	0	0	0	0	0	0	0	0%
5490(LF)	1	1	1	1	0	1	1	1	1	1	90%
5491	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	0	1	1	1	1	1	90%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5496	1	1	1	1	1	1	1	1	1	1	100%
5497	1	1	1	1	1	1	1	1	1	0	90%
5498	1	1	1	0	1	1	1	1	1	1	90%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	0	1	1	1	1	1	90%
5502	1	1	1	1	0	1	1	1	1	1	90%
5503	1	1	1	1	1	1	1	1	1	1	100%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	0	1	1	1	1	1	1	1	1	90%
5507	1	1	1	1	1	0	1	1	1	1	90%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	0	1	1	1	1	1	1	90%
5511	1	1	1	1	1	1	1	1	1	1	100%
5512	1	1	0	1	1	1	1	1	1	1	90%
5513	1	1	1	1	1	1	1	1	1	1	100%
5514	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5516	1	1	1	1	1	1	1	1	1	1	100%
5517	1	1	1	1	1	1	1	1	1	1	100%
5518	1	1	1	1	1	1	1	1	1	1	100%
5519	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5521	1	1	1	1	1	1	1	1	1	1	100%
5522	1	1	1	1	1	1	0	1	1	1	90%
5523	0	1	1	1	1	1	1	1	1	1	90%
5524	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	0	1	1	1	1	90%

5526	1	1	1	1	1	1	1	1	1	1	100%
5527	1	1	1	1	1	1	1	1	1	1	100%
5528	1	1	0	1	1	1	1	1	1	1	90%
5529	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5531	1	1	1	1	1	1	1	1	1	1	100%
5532	1	1	1	1	1	0	1	1	1	1	90%
5533	1	1	1	1	0	1	1	1	1	1	90%
5534	1	1	1	1	1	1	1	1	1	1	100%
5535	1	1	1	1	1	1	1	1	1	1	100%
5536	1	1	1	1	0	1	1	1	1	1	90%
5537	1	1	1	1	1	1	1	1	1	1	100%
5538	1	1	1	1	1	1	1	0	1	1	90%
5539	1	1	1	1	1	1	1	1	1	1	100%
5540	1	1	1	1	1	1	1	1	1	1	100%
5541	1	1	1	1	1	1	1	1	1	1	100%
5542	1	1	1	1	1	1	1	1	1	1	100%
5543	1	1	1	1	1	1	1	1	1	1	100%
5544	1	1	1	1	1	0	1	1	1	1	90%
5545	1	1	1	1	1	1	1	1	1	1	100%
5546	1	1	1	1	1	1	1	1	1	1	100%
5547	1	1	1	1	1	1	1	1	1	1	100%
5548	1	1	1	1	1	1	1	1	1	1	100%
5549	1	1	1	1	1	1	1	1	1	1	100%
5550	1	1	1	1	1	1	1	1	1	1	100%
5551	1	1	1	0	1	1	1	1	1	1	90%
5552	1	1	1	1	1	1	1	1	1	1	100%
5553	1	1	1	1	0	1	1	1	1	1	90%
5554	1	0	1	1	1	1	1	1	1	1	90%
5555	1	1	1	1	1	1	1	1	1	1	100%
5556	1	1	1	1	1	1	1	1	1	1	100%
5557	1	1	1	0	1	1	1	1	1	1	90%
5558	1	1	1	1	1	1	1	1	0	1	90%
5559	1	1	1	1	1	1	1	1	0	1	90%
5560	1	1	1	1	1	1	1	1	1	1	100%
5561	1	1	1	1	1	1	1	1	1	1	100%
5562	1	1	1	1	1	0	1	1	1	1	90%
5563	1	1	1	0	1	1	1	1	1	1	90%
5564	1	1	1	1	1	1	1	1	1	1	100%
5565	1	1	1	1	1	1	0	1	1	1	90%
5566	1	1	1	1	1	1	1	1	1	1	100%
5567	1	1	1	1	1	1	0	1	1	1	90%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.

Seite 107 von 256
Page 107 of 256

160 MHz Detection Bandwidth = $F_h - F_l = 5650\text{MHz} - 5490\text{MHz} = 160\text{MHz}$

EUT 99% Bandwidth = 157MHz

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 108 von 256
Page 108 of 256**<Statistical Performance Check for Traffic Mode>****Modulation Mode: 802.11ax HE20 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	28	93%	60%	Pass
3	30	26	87%	60%	Pass
4	30	25	83%	60%	Pass
Average			90%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 109 von 256
 Page 109 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	0
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	0
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	0
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 111 von 256
 Page 111 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	0
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	0
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	0
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	0
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	0
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	0
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	0
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	0
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	0
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	83%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 113 von 256
 Page 113 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.32	1
2	8	1.5	12	5.32	1
3	11	1.0909091	12	5.32	1
4	20	0.6	12	5.32	1
5	17	0.7058824	12	5.32	1
6	14	0.8571429	12	5.32	1
7	15	0.8	12	5.32	1
8	12	1	12	5.32	1
9	14	0.8571429	12	5.32	1
10	8	1.5	12	5.32	1
11	17	0.7058824	12	5.317	1
12	19	0.6315789	12	5.318	1
13	15	0.8	12	5.315	1
14	12	1	12	5.314	1
15	19	0.6315789	12	5.317	1
16	14	0.8571429	12	5.315	1
17	20	0.6	12	5.318	1
18	12	1	12	5.314	1
19	14	0.8571429	12	5.315	1
20	12	1	12	5.314	1
21	16	0.75	12	5.324	1
22	12	1	12	5.326	1
23	20	0.6	12	5.322	1
24	14	0.8571429	12	5.325	1
25	13	0.9230769	12	5.325	1
26	8	1.5	12	5.328	1
27	17	0.7058824	12	5.323	1
28	19	0.6315789	12	5.322	1
29	12	1	12	5.326	1
30	18	0.6666667	12	5.323	1
Detection Percentage				Limit >80%	100%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 115 von 256
Page 115 of 256**Modulation Mode: 802.11ax HE20 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	28	93%	60%	Pass
2	30	26	87%	60%	Pass
3	30	26	87%	60%	Pass
4	30	25	83%	60%	Pass
Average			88%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 116 von 256
 Page 116 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	0
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	0
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 117 von 256
 Page 117 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	0
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	0
9	3.1	164	26	4264	0
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	0
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 118 von 256
 Page 118 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	0
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	0
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	0
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	0
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
2	6.1	487	16	7792	1
Detection Percentage				Limit >60%	87%

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	0
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	0
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	0
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	0
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	83%

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detecti on Blank=No Detection
1	15	0.8	12	5.5	1
2	8	1.5	12	5.5	1
3	11	1.090909091	12	5.5	1
4	20	0.6	12	5.5	1
5	17	0.705882353	12	5.5	1
6	14	0.857142857	12	5.5	1
7	15	0.8	12	5.5	1
8	12	1	12	5.5	1
9	14	0.857142857	12	5.5	1
10	8	1.5	12	5.5	1
11	17	0.705882353	12	5.497	1
12	19	0.631578947	12	5.498	1
13	15	0.8	12	5.496	1
14	12	1	12	5.494	1
15	19	0.631578947	12	5.498	1
16	14	0.857142857	12	5.495	1
17	20	0.6	12	5.498	1
18	12	1	12	5.494	1
19	14	0.857142857	12	5.495	1
20	12	1	12	5.494	1
21	16	0.75	12	5.504	1
22	12	1	12	5.506	1
23	20	0.6	12	5.502	1
24	14	0.857142857	12	5.505	1
25	13	0.923076923	12	5.505	1
26	8	1.5	12	5.508	1
27	17	0.705882353	12	5.503	1
28	19	0.631578947	12	5.502	1
29	12	1	12	5.506	1
30	18	0.666666667	12	5.503	1
Detection Percentage				Limit >90%	100

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 122 von 256
Page 122 of 256**Modulation Mode: 802.11ax HE40 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	30	100%	60%	Pass
2	30	27	90%	60%	Pass
3	30	23	77%	60%	Pass
4	30	23	77%	60%	Pass
Average			86%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 123 von 256
 Page 123 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 124 von 256
 Page 124 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	0
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	0
22	2.2	176	25	4400	0
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 125 von 256
 Page 125 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	0
2	6.1	487	16	7792	1
3	7.1	344	16	5504	0
4	9.8	288	18	5184	1
5	8.9	230	18	4140	0
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	0
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	0
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	0
29	7.4	264	17	4488	0
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 126 von 256
 Page 126 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	0
12	19	463	16	7408	1
13	16	441	14	6174	0
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	0
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	0
24	15.3	278	14	3892	0
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	0
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 127 von 256
 Page 127 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.31	1
2	8	1.5	12	5.31	1
3	11	1.090909	12	5.31	1
4	20	0.6	12	5.31	1
5	17	0.705882	12	5.31	1
6	14	0.857143	12	5.31	1
7	15	0.8	12	5.31	1
8	12	1	12	5.31	1
9	14	0.857143	12	5.31	1
10	8	1.5	12	5.31	1
11	17	0.705882	12	5.297	1
12	19	0.631579	12	5.298	1
13	15	0.8	12	5.296	1
14	12	1	12	5.295	1
15	19	0.631579	12	5.298	1
16	14	0.857143	12	5.296	1
17	20	0.6	12	5.299	1
18	12	1	12	5.295	1
19	14	0.857143	12	5.296	1
20	12	1	12	5.295	1
21	16	0.75	12	5.323	1
22	12	1	12	5.326	1
23	20	0.6	12	5.321	1
24	14	0.857143	12	5.324	1
25	13	0.923077	12	5.325	1
26	8	1.5	12	5.327	1
27	17	0.705882	12	5.323	1
28	19	0.631579	12	5.322	1
29	12	1	12	5.325	1
30	18	0.666667	12	5.322	1
Detection Percentage				Limit >80%	100%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 129 von 256
Page 129 of 256**Modulation Mode: 802.11ax HE40 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	25	83%	60%	Pass
3	30	23	77%	60%	Pass
4	30	23	77%	60%	Pass
Average			83%	80%	Pass
5	30	29	97%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 130 von 256
 Page 130 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	0
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 131 von 256
 Page 131 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	0
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	0
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	0
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	0
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	0
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	83%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 132 von 256
 Page 132 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	0
4	9.8	288	18	5184	1
5	8.9	230	18	4140	0
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	0
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	0
17	10	324	18	5832	1
18	7.4	271	17	4607	0
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	0
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	0
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 133 von 256
 Page 133 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	0
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	0
11	17.4	208	15	3120	0
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	0
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	0
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	0
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 134 von 256
 Page 134 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.51	1
2	8	1.5	12	5.51	1
3	11	1.090909	12	5.51	1
4	20	0.6	12	5.51	1
5	17	0.705882	12	5.51	1
6	14	0.857143	12	5.51	1
7	15	0.8	12	5.51	1
8	12	1	12	5.51	1
9	14	0.857143	12	5.51	1
10	8	1.5	12	5.51	1
11	17	0.705882	12	5.497	1
12	19	0.631579	12	5.499	1
13	15	0.8	12	5.496	1
14	12	1	12	5.495	0
15	19	0.631579	12	5.498	1
16	14	0.857143	12	5.496	1
17	20	0.6	12	5.499	1
18	12	1	12	5.495	1
19	14	0.857143	12	5.496	1
20	12	1	12	5.495	1
21	16	0.75	12	5.523	1
22	12	1	12	5.525	1
23	20	0.6	12	5.521	1
24	14	0.857143	12	5.524	1
25	13	0.923077	12	5.525	1
26	8	1.5	12	5.527	1
27	17	0.705882	12	5.523	1
28	19	0.631579	12	5.521	1
29	12	1	12	5.525	1
30	18	0.666667	12	5.522	1
Detection Percentage				Limit >80%	97%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 135 von 256
 Page 135 of 256

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 136 von 256
Page 136 of 256**Modulation Mode: 802.11ax HE80 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	27	90%	60%	Pass
3	30	25	83%	60%	Pass
4	30	24	80%	60%	Pass
Average			88%	80%	Pass
5	30	29	97%	80%	Pass
6	30	30	100%	70%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	0
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	0
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	0
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 139 von 256
 Page 139 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	0
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	0
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	0
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	0
25	7.5	317	17	5389	0
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	83%

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	0
7	15.9	207	14	2898	1
8	14.3	443	13	5759	0
9	15.8	439	14	6146	0
10	11.5	223	12	2676	1
11	17.4	208	15	3120	0
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	0
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	0
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	80%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 141 von 256
 Page 141 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.29	1
2	8	1.5	12	5.29	1
3	11	1.0909091	12	5.29	1
4	20	0.6	12	5.29	1
5	17	0.7058824	12	5.29	1
6	14	0.8571429	12	5.29	1
7	15	0.8	12	5.29	1
8	12	1	12	5.29	1
9	14	0.8571429	12	5.29	1
10	8	1.5	12	5.29	1
11	17	0.7058824	12	5.258	1
12	19	0.6315789	12	5.259	1
13	15	0.8	12	5.256	1
14	12	1	12	5.255	0
15	19	0.6315789	12	5.258	1
16	14	0.8571429	12	5.256	1
17	20	0.6	12	5.259	1
18	12	1	12	5.255	1
19	14	0.8571429	12	5.256	1
20	12	1	12	5.255	1
21	16	0.75	12	5.323	1
22	12	1	12	5.325	1
23	20	0.6	12	5.321	1
24	14	0.8571429	12	5.324	1
25	13	0.9230769	12	5.324	1
26	8	1.5	12	5.327	1
27	17	0.7058824	12	5.322	1
28	19	0.6315789	12	5.321	1
29	12	1	12	5.325	1
30	18	0.6666667	12	5.322	1
Detection Percentage				Limit >80%	97%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 142 von 256
 Page 142 of 256

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 143 von 256
Page 143 of 256**Modulation Mode: 802.11ax HE80 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	28	93%	60%	Pass
2	30	25	83%	60%	Pass
3	30	26	87%	60%	Pass
4	30	23	77%	60%	Pass
Average			85%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	0
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	0
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 145 von 256
 Page 145 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	0
9	3.1	164	26	4264	0
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	0
15	4.5	163	29	4727	1
16	3	203	26	5278	0
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	0
Detection Percentage				Limit >60%	83%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	0
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	0
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	0
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	0
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 147 von 256
 Page 147 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	0
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	0
7	15.9	207	14	2898	1
8	14.3	443	13	5759	0
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	0
18	14.1	271	13	3523	0
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	0
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	0
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 148 von 256
 Page 148 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.53	1
2	8	1.5	12	5.53	1
3	11	1.0909091	12	5.53	1
4	20	0.6	12	5.53	1
5	17	0.7058824	12	5.53	1
6	14	0.8571429	12	5.53	1
7	15	0.8	12	5.53	1
8	12	1	12	5.53	1
9	14	0.8571429	12	5.53	1
10	8	1.5	12	5.53	1
11	17	0.7058824	12	5.498	1
12	19	0.6315789	12	5.499	1
13	15	0.8	12	5.496	1
14	12	1	12	5.495	1
15	19	0.6315789	12	5.498	1
16	14	0.8571429	12	5.496	1
17	20	0.6	12	5.499	1
18	12	1	12	5.495	1
19	14	0.8571429	12	5.496	1
20	12	1	12	5.495	1
21	16	0.75	12	5.563	1
22	12	1	12	5.565	1
23	20	0.6	12	5.561	1
24	14	0.8571429	12	5.564	1
25	13	0.9230769	12	5.564	1
26	8	1.5	12	5.567	1
27	17	0.7058824	12	5.562	1
28	19	0.6315789	12	5.561	1
29	12	1	12	5.565	1
30	18	0.6666667	12	5.562	1
Detection Percentage				Limit >80%	100%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 150 von 256
Page 150 of 256**Modulation Mode: 802.11ax HE160 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	26	87%	60%	Pass
2	30	28	93%	60%	Pass
3	30	23	77%	60%	Pass
4	30	22	73%	60%	Pass
Average			83%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	0
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	0
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	0
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	0
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 152 von 256
 Page 152 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	0
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	0
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 153 von 256
 Page 153 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	0
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	0
13	8.2	441	17	7497	0
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	0
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	0
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	0
28	9.7	272	18	4896	1
29	7.4	264	17	4488	0
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 154 von 256
 Page 154 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	0
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	0
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	0
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	0
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	0
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	0
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	0
Detection Percentage				Limit >60%	73%

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.29	1
2	8	1.5	12	5.29	1
3	11	1.0909091	12	5.29	1
4	20	0.6	12	5.29	1
5	17	0.7058824	12	5.29	1
6	14	0.8571429	12	5.29	1
7	15	0.8	12	5.29	1
8	12	1	12	5.29	1
9	14	0.8571429	12	5.29	1
10	8	1.5	12	5.29	1
11	17	0.7058824	12	5.256	1
12	19	0.6315789	12	5.258	1
13	15	0.8	12	5.255	1
14	12	1	12	5.254	1
15	19	0.6315789	12	5.257	1
16	14	0.8571429	12	5.255	1
17	20	0.6	12	5.258	1
18	12	1	12	5.254	1
19	14	0.8571429	12	5.255	1
20	12	1	12	5.254	1
21	16	0.75	12	5.324	1
22	12	1	12	5.326	1
23	20	0.6	12	5.322	1
24	14	0.8571429	12	5.325	1
25	13	0.9230769	12	5.326	1
26	8	1.5	12	5.328	1
27	17	0.7058824	12	5.324	1
28	19	0.6315789	12	5.322	1
29	12	1	12	5.326	1
30	18	0.6666667	12	5.323	1
Detection Percentage				Limit >80%	100%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 156 von 256
 Page 156 of 256

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 157 von 256
Page 157 of 256**Modulation Mode: 802.11ax HE160 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	28	93%	60%	Pass
2	30	28	93%	60%	Pass
3	30	24	80%	60%	Pass
4	30	24	80%	60%	Pass
Average			87%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	0
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 159 von 256
 Page 159 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	0
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	0
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 160 von 256
 Page 160 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	0
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	0
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	0
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	0
25	7.5	317	17	5389	0
26	6.1	260	16	4160	1
27	8.8	211	18	3798	0
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	80%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	0
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	0
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	0
23	19.8	274	16	4384	0
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	0
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	80%

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.57	1
2	8	1.5	12	5.57	1
3	11	1.0909091	12	5.57	1
4	20	0.6	12	5.57	1
5	17	0.7058824	12	5.57	1
6	14	0.8571429	12	5.57	1
7	15	0.8	12	5.57	1
8	12	1	12	5.57	1
9	14	0.8571429	12	5.57	1
10	8	1.5	12	5.57	1
11	17	0.7058824	12	5.498	1
12	19	0.6315789	12	5.499	1
13	15	0.8	12	5.497	1
14	12	1	12	5.496	1
15	19	0.6315789	12	5.499	1
16	14	0.8571429	12	5.496	1
17	20	0.6	12	5.5	1
18	12	1	12	5.496	1
19	14	0.8571429	12	5.496	1
20	12	1	12	5.496	1
21	16	0.75	12	5.642	1
22	12	1	12	5.645	1
23	20	0.6	12	5.64	1
24	14	0.8571429	12	5.644	1
25	13	0.9230769	12	5.644	1
26	8	1.5	12	5.646	1
27	17	0.7058824	12	5.642	1
28	19	0.6315789	12	5.641	1
29	12	1	12	5.644	1
30	18	0.6666667	12	5.642	1
Detection Percentage				Limit >80%	100%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE20 (Band 3)

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	30	100%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE40

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	30	100%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	100%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE80

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	27	90%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	0
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	0
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE160

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	28	93%	60%	Pass


Type 1 Radar Statistical Performance




Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	0
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	93%


Please refer to Appendix E for Radar Test Waveform.



<PINE>

<Radar Waveform calibration>

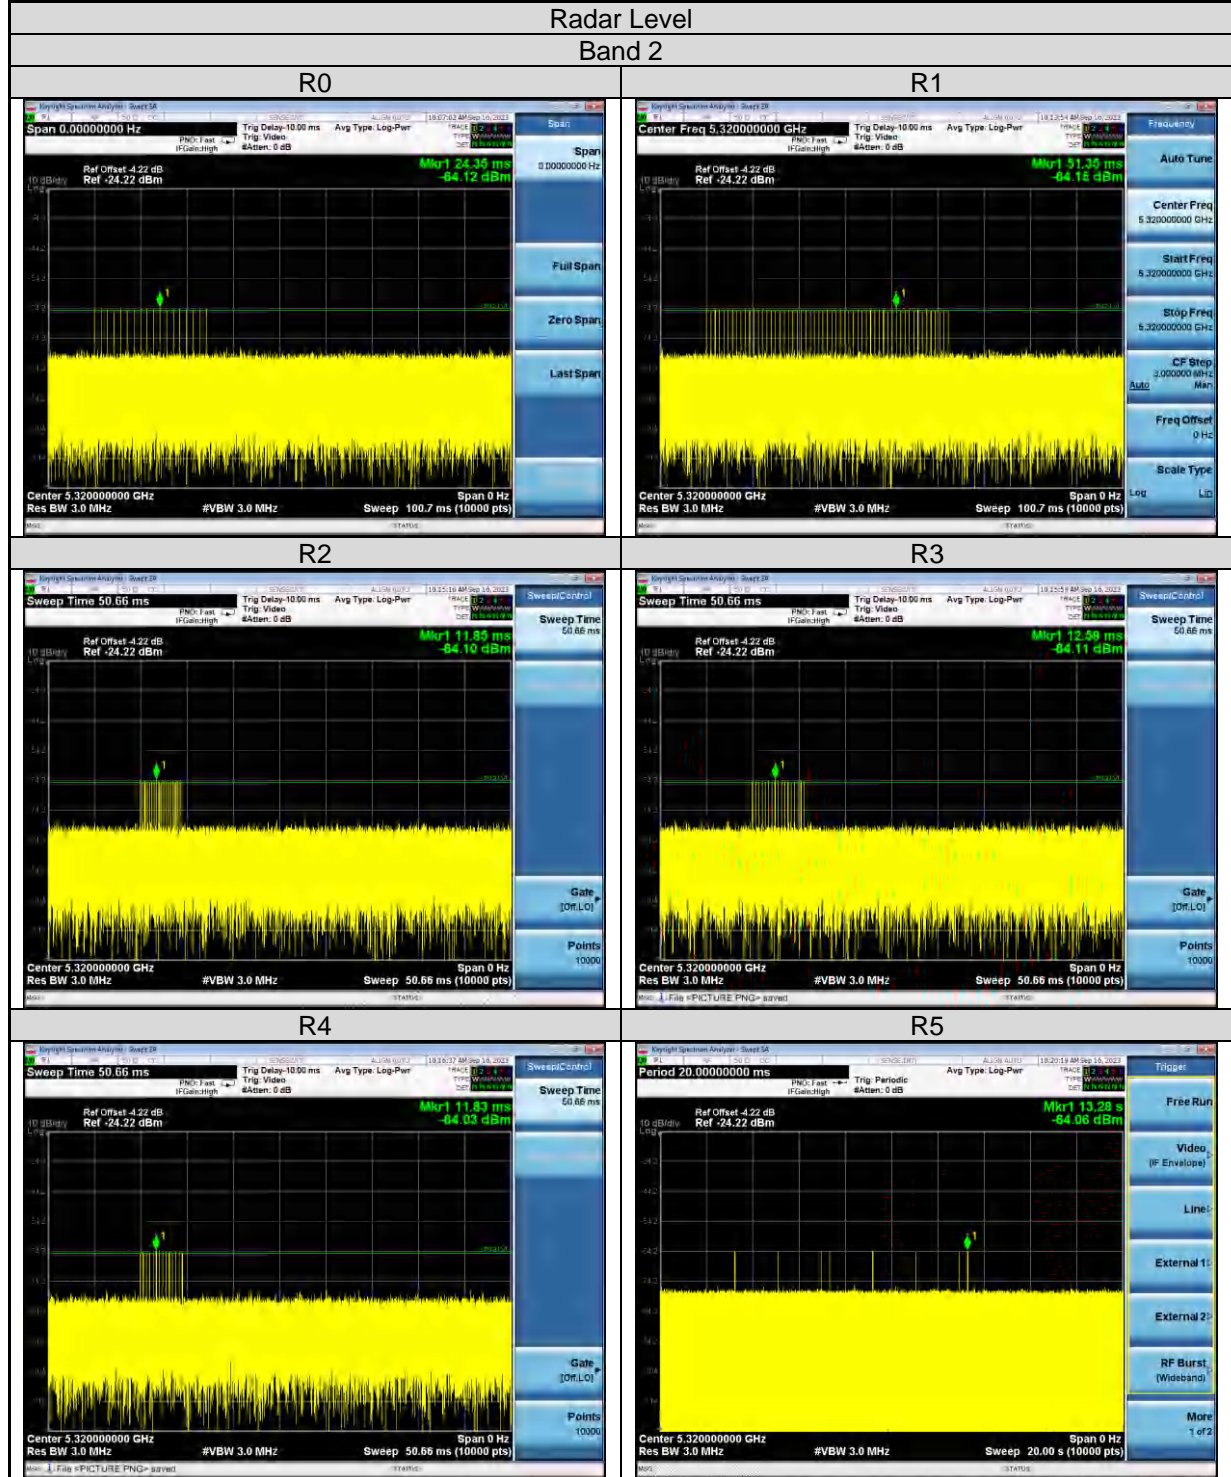

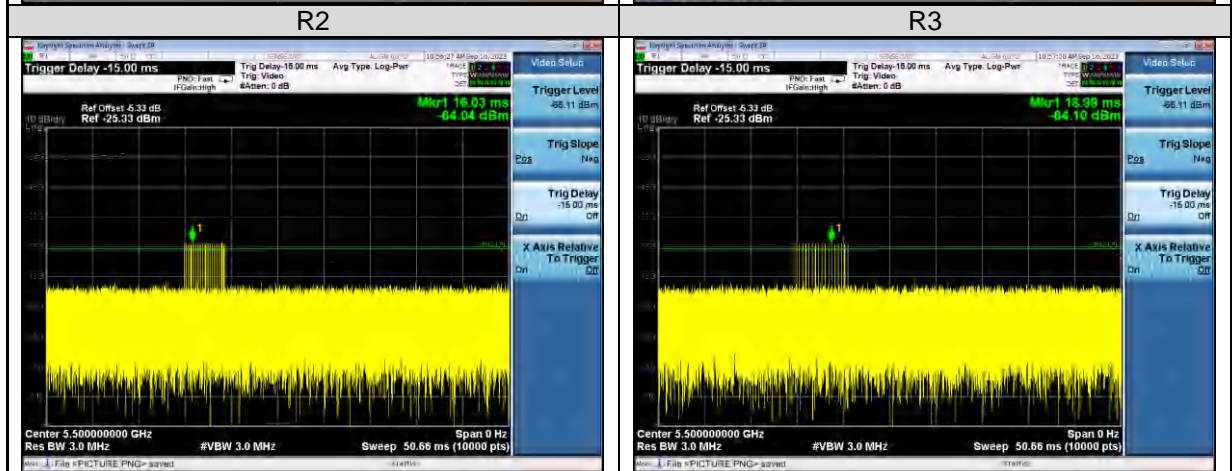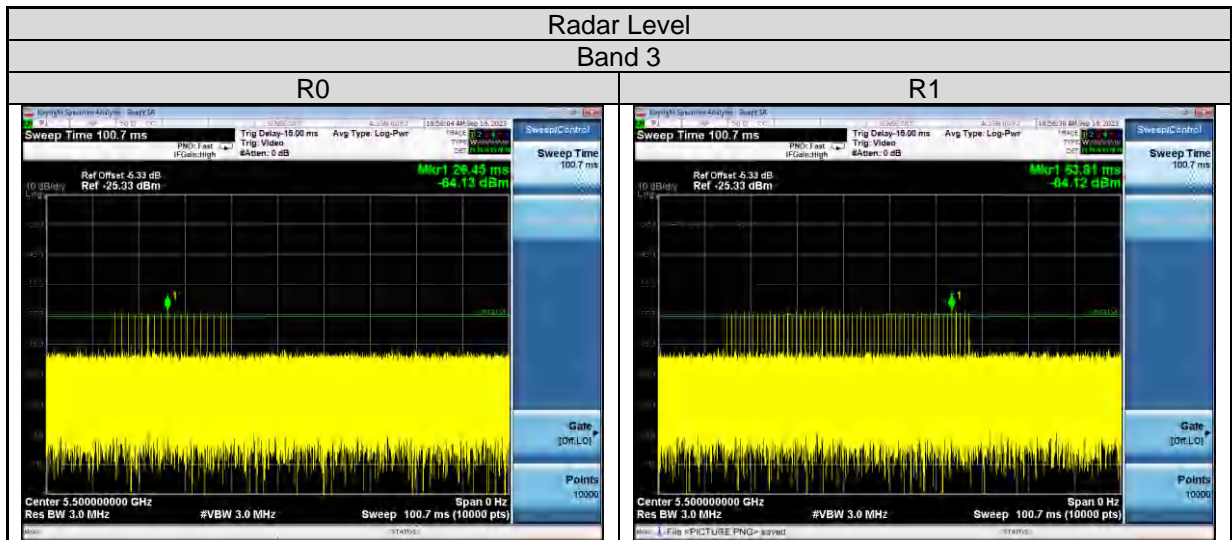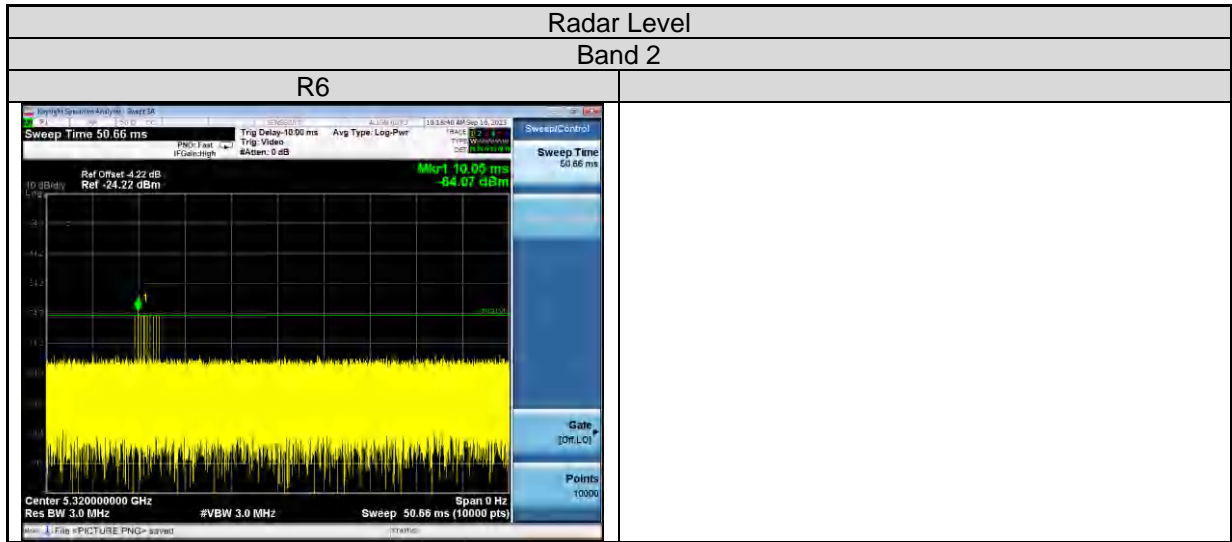

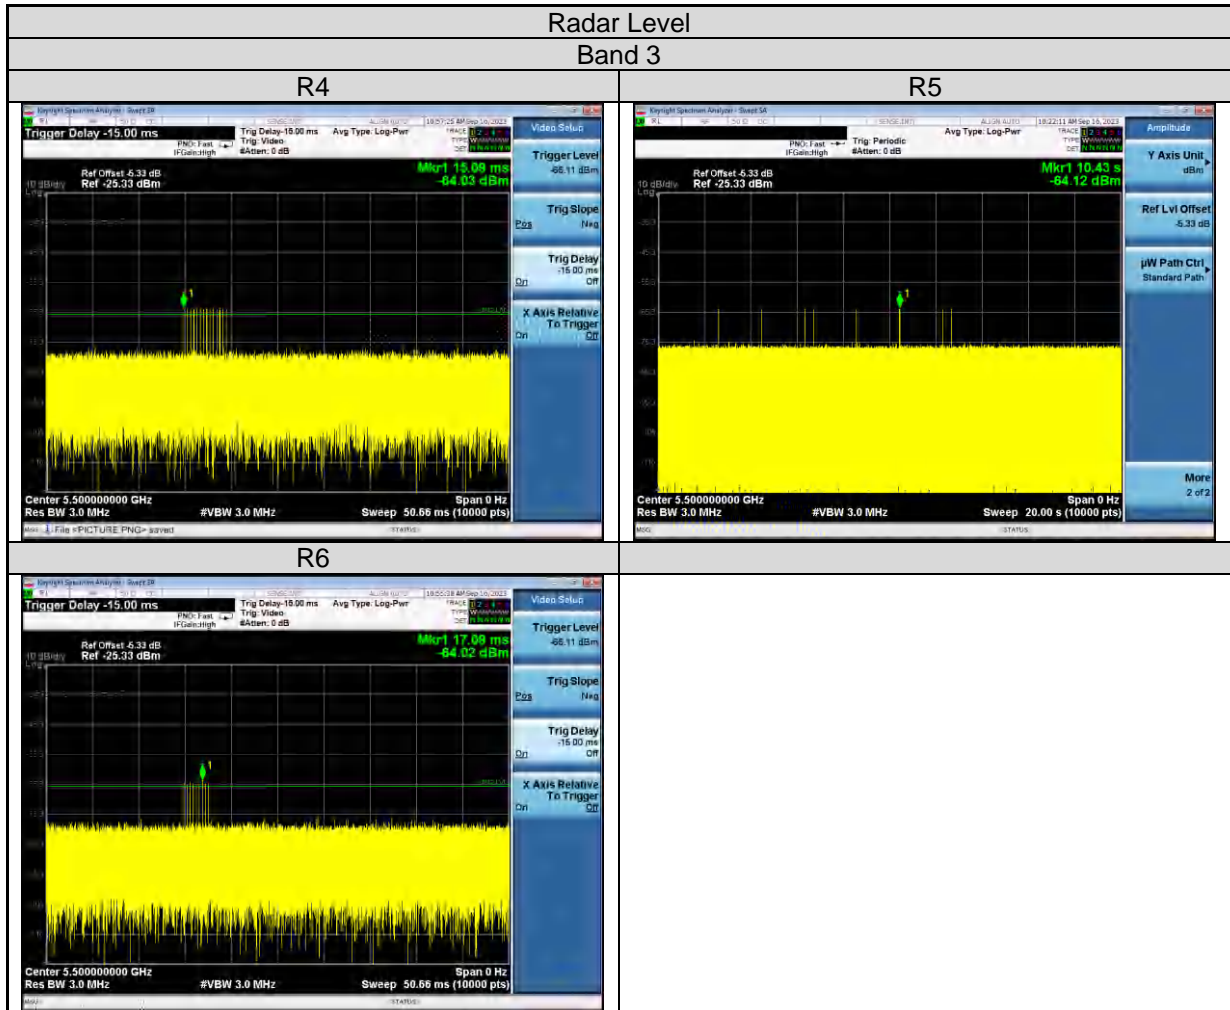

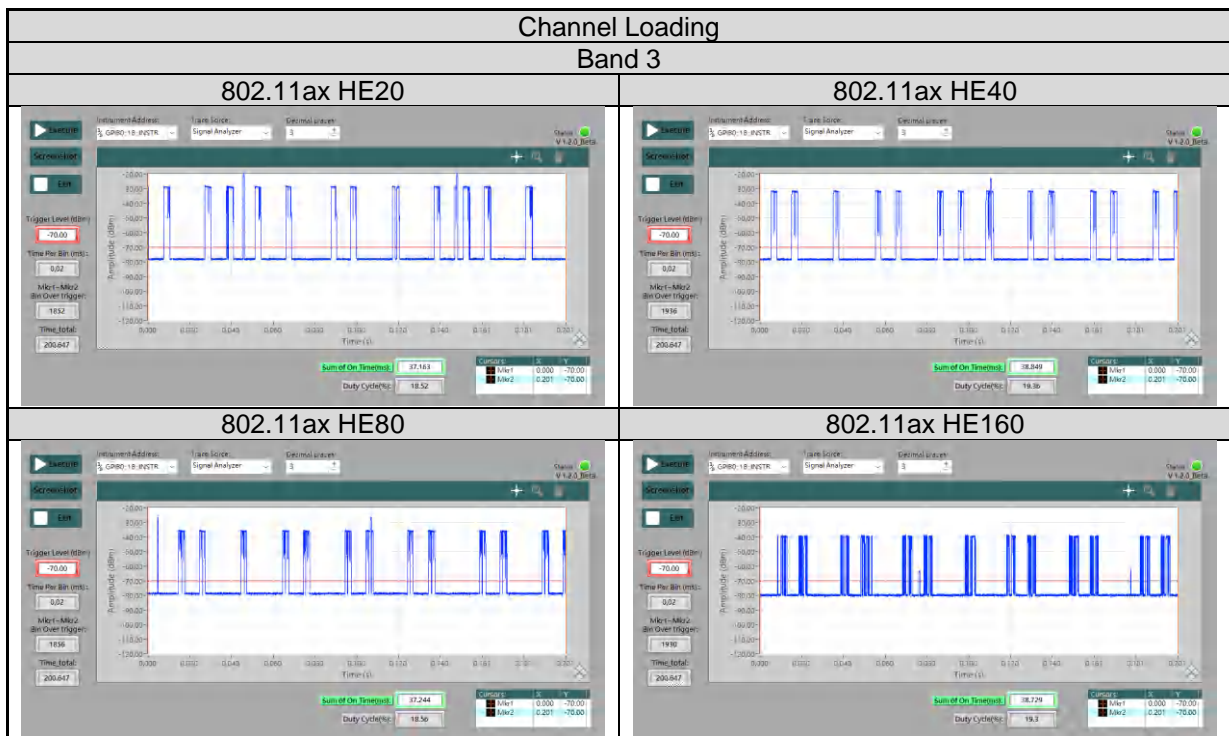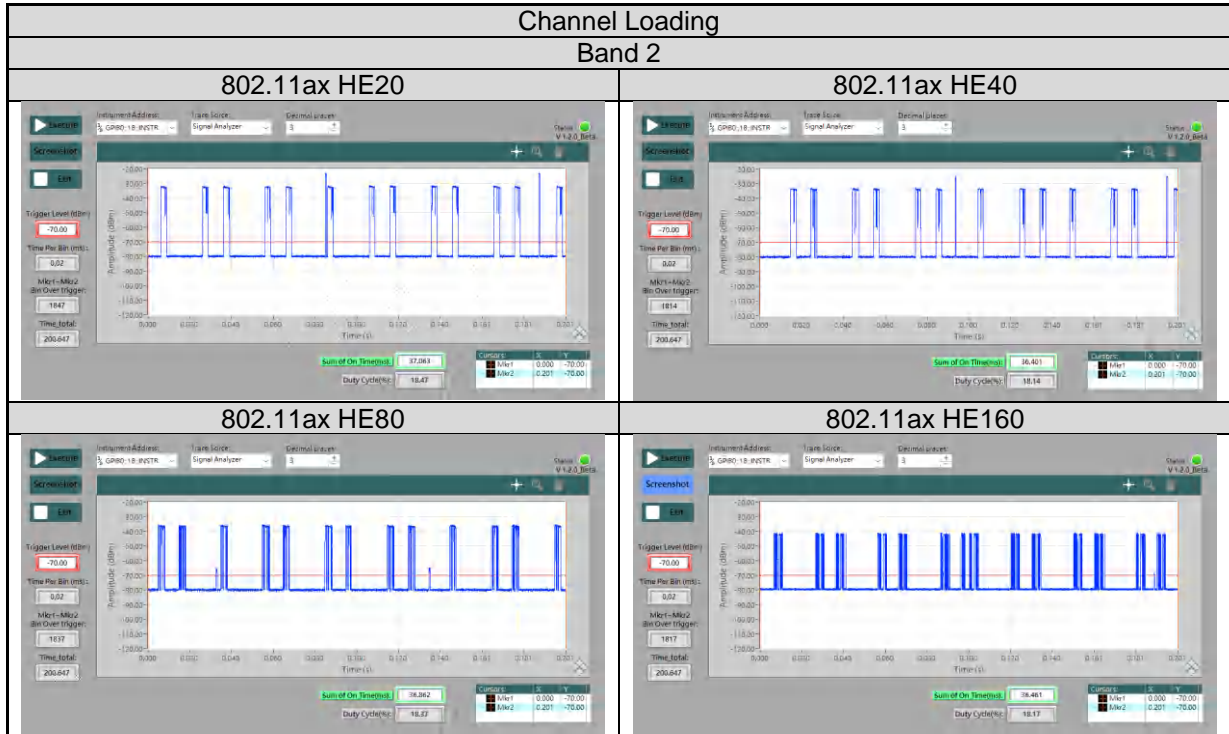


<802.11ax HE160 >

Channel Moving Time (CMT):

Radar Type	Channel (MHz)	Channel Move Time (s)	Limit (s)	Result
R0	5250	0.488	10	Pass
R0	5570	0.476	10	Pass


Channel Closing Transmission Time (CCTT):


Radar Type	Channel (MHz)	Channel Closing Transmission Time (s)	Limit (ms)	Result
R0	5250	0.01	< 60	Pass
R0	5570	0.01	< 60	Pass

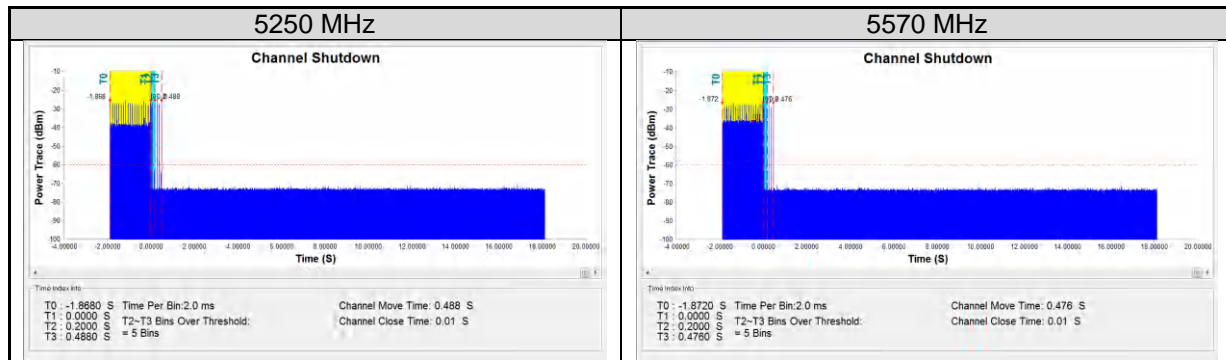

<802.11ax HE160 >

Non-occupancy period

Channel (MHz)	Limit (minute)	Result
5250	≥ 30	Pass
5570	≥ 30	Pass

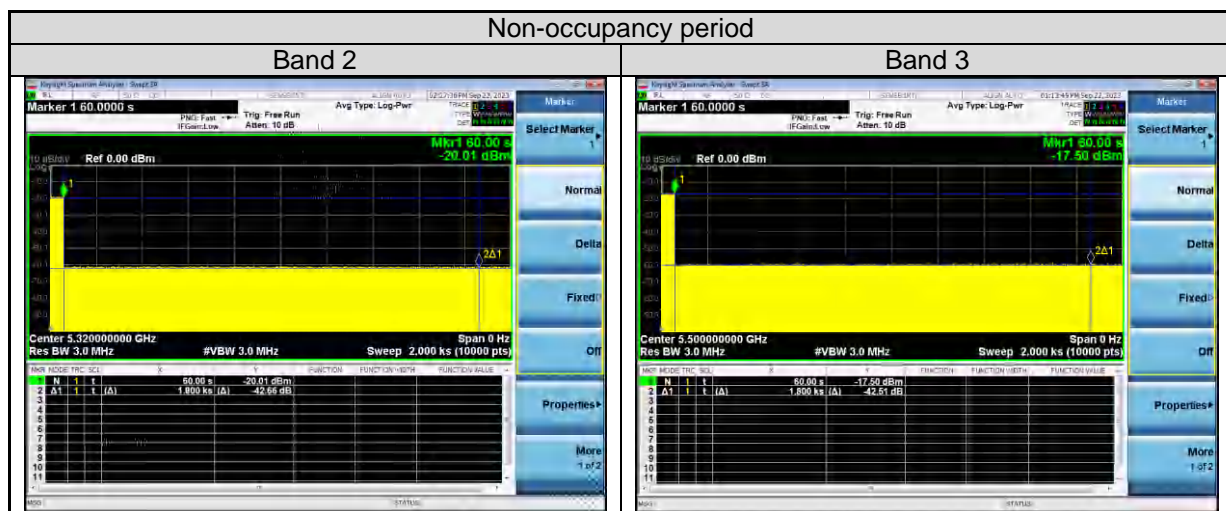

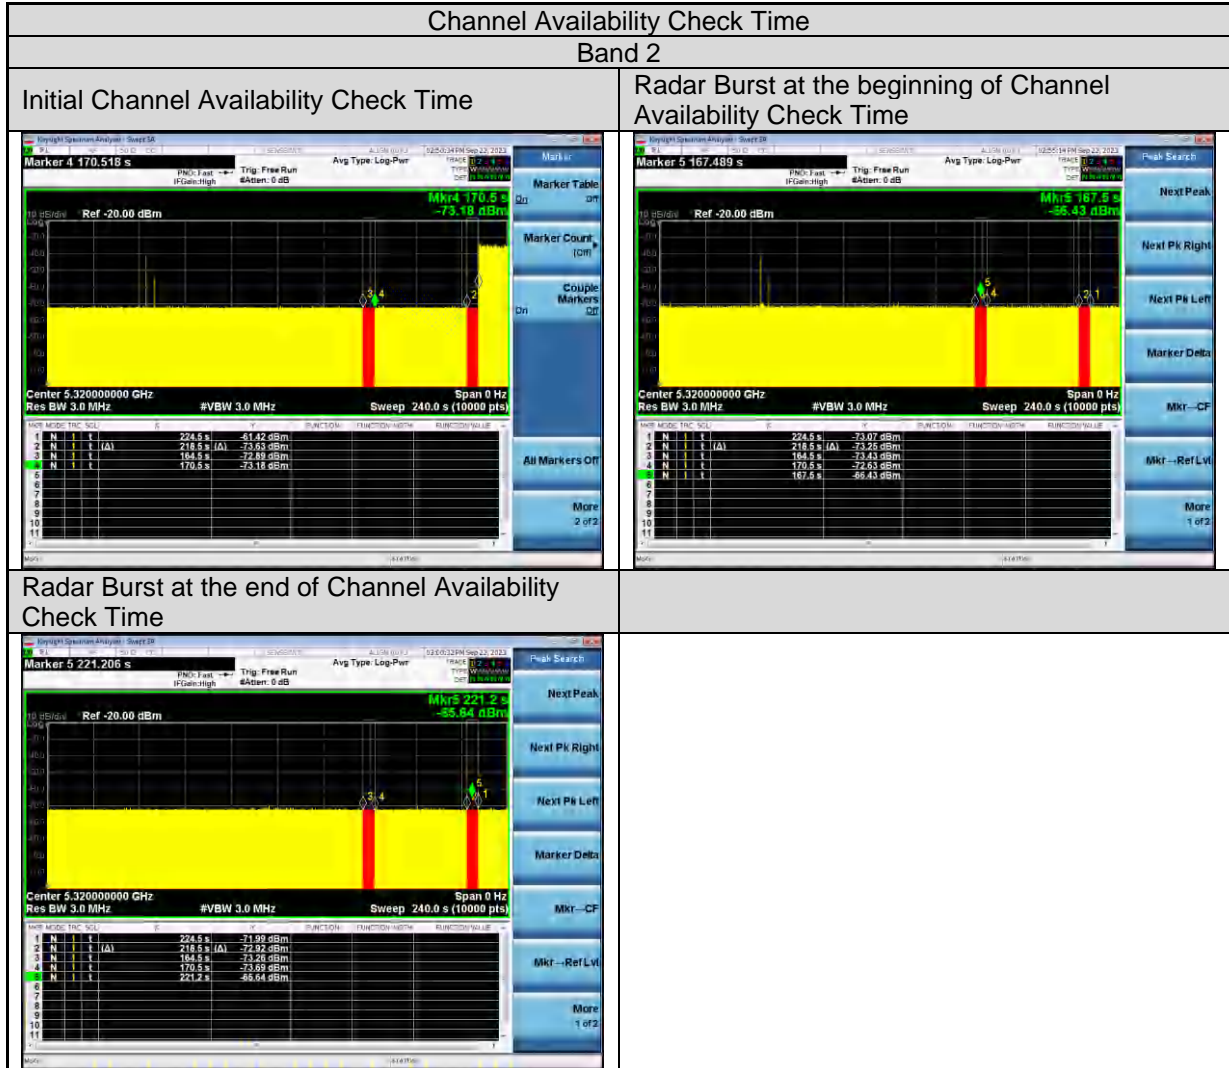

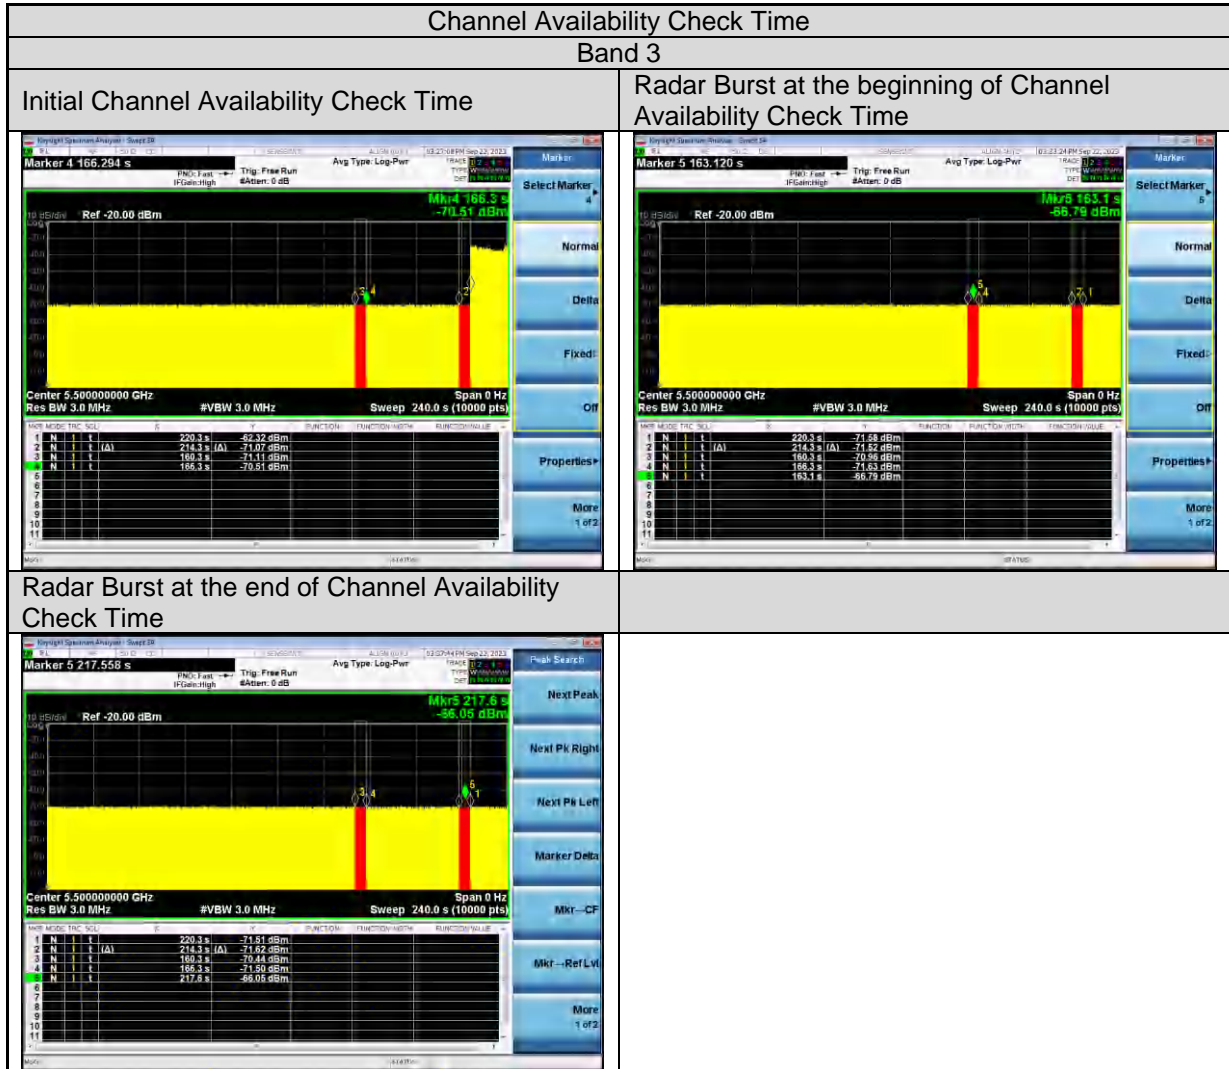

<U-NII Detection Bandwidth>

20 MHz Signal Bandwidth											
EUT Frequency = 5320MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5309	0	0	0	0	0	0	0	0	0	0	0%
5310(FL)	1	1	1	1	1	1	1	1	1	1	100%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	1	1	1	1	1	1	100%
5313	1	1	1	0	1	1	1	1	1	1	90%
5314	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	1	1	1	1	1	100%
5317	1	1	1	1	1	1	1	1	1	1	100%
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	0	1	1	1	90%
5320	1	1	1	1	1	1	1	1	1	1	100%
5321	1	1	1	1	1	1	1	1	1	1	100%
5322	1	1	1	1	1	1	1	1	1	1	100%
5323	1	1	1	1	1	1	1	1	1	1	100%
5324	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	1	1	1	1	1	1	1	1	1	1	100%
5327	1	1	1	1	1	1	1	1	1	1	100%
5328	1	1	1	1	1	1	1	1	1	1	100%
5329	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0%
20 MHz Detection Bandwidth = Fh - Fl = 5330MHz - 5310MHz = 20MHz											
EUT 99% Bandwidth = 18.97MHz											

20 MHz Signal Bandwidth											
EUT Frequency = 5500MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	0	0	0	0	0	0	0	0	0	0	0%
5490(FL)	1	1	1	1	1	1	1	1	1	1	100%
5491	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	0	1	1	1	1	90%
5496	1	1	1	1	1	1	1	1	1	1	100%
5497	1	1	1	1	1	1	1	1	1	1	100%
5498	1	1	1	1	1	1	1	0	1	1	90%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	1	1	1	1	1	1	100%
5502	1	1	1	1	1	1	1	1	1	1	100%
5503	1	1	1	1	1	1	1	1	1	1	100%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510(FH)	1	1	1	1	1	1	1	1	1	1	100%
5511	0	0	0	0	0	0	0	0	0	0	0%
20 MHz Detection Bandwidth = Fh - Fl = 5510MHz - 5490MHz = 20MHz											
EUT 99% Bandwidth = 18.98MHz											

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 178 von 256
 Page 178 of 256

5325	1	1	1	1	1	0	1	1	1	1	90%
5326	1	1	1	1	1	1	0	1	1	1	90%
5327	1	1	1	0	1	1	1	1	1	1	90%
5328	1	1	1	1	1	1	1	0	1	1	90%
5329	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0%

 40 MHz Detection Bandwidth = $F_h - F_l = 5330\text{MHz} - 5290\text{MHz} = 40\text{MHz}$

EUT 99% Bandwidth = 37.99MHz

40 MHz Signal Bandwidth											
EUT Frequency = 5510MHz											
Radar Frequency (MHz)	DFS Detection Trials (1=Detection, Blank= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	0	0	0	0	0	0	0	0	0	0	0%
5490(FL)	1	1	1	1	1	1	1	1	1	1	100%
5491	1	1	1	1	1	1	1	1	1	1	100%
5492	1	1	1	1	1	1	1	1	1	1	100%
5493	1	1	1	1	1	1	1	1	1	1	100%
5494	1	1	1	1	1	1	1	1	1	0	90%
5495	1	1	1	1	0	1	1	1	1	1	90%
5496	1	1	0	1	1	1	1	1	1	1	90%
5497	1	1	1	1	1	1	1	0	1	1	90%
5498	1	1	1	1	1	1	1	1	0	1	90%
5499	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5501	1	1	1	1	1	1	1	1	1	1	100%
5502	1	1	1	1	1	1	1	1	1	1	100%
5503	1	0	1	1	1	1	1	1	1	1	90%
5504	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5506	1	1	1	1	1	1	1	1	1	1	100%
5507	1	1	1	1	1	1	1	1	1	1	100%
5508	1	1	1	1	1	1	1	1	1	1	100%
5509	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	0	1	90%
5511	1	1	1	1	1	1	1	1	1	1	100%
5512	1	1	1	1	1	1	1	1	1	1	100%
5513	1	1	1	1	1	1	1	1	1	1	100%
5514	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5516	1	1	1	1	1	1	1	0	1	1	90%
5517	1	1	1	0	1	1	1	1	1	1	90%
5518	1	1	0	1	1	1	1	1	1	1	90%
5519	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5521	1	1	1	1	1	1	0	1	1	1	90%
5522	0	1	1	1	1	1	1	1	1	1	90%
5523	1	1	1	1	1	1	0	1	1	1	90%
5524	1	1	1	1	1	1	1	1	0	1	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 180 von 256
 Page 180 of 256

5525	1	1	1	1	1	1	1	1	1	1	100%
5526	1	0	1	1	1	1	1	1	1	1	90%
5527	1	1	1	1	1	1	1	1	1	1	100%
5528	1	1	1	1	1	1	1	1	1	1	100%
5529	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5531	0	0	0	0	0	0	0	0	0	0	0%

 40 MHz Detection Bandwidth = $F_h - F_l = 5530\text{MHz} - 5490\text{MHz} = 40\text{MHz}$

EUT 99% Bandwidth = 37.81MHz

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 183 von 256
 Page 183 of 256

5328	1	1	1	1	1	1	1	1	1	1	100%
5329	1	1	1	1	1	1	1	1	1	1	100%
5330(FH)	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0%
80 MHz Detection Bandwidth = $F_h - F_l = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$											
EUT 99% Bandwidth = 77.2MHz											

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 186 von 256
 Page 186 of 256

5568	1	1	1	1	1	1	1	1	1	1	100%
5569	1	1	1	1	1	1	1	1	1	1	100%
5570(FH)	1	1	1	1	1	1	1	1	1	1	100%
5571	0	0	0	0	0	0	0	0	0	0	0%
80 MHz Detection Bandwidth = $F_h - F_l = 5570\text{MHz} - 5490\text{MHz} = 80\text{MHz}$											
EUT 99% Bandwidth = 77.67MHz											

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 188 von 256
 Page 188 of 256

5286	1	1	0	1	1	1	1	1	1	1	90%
5287	1	1	1	1	1	1	1	1	1	1	100%
5288	1	1	1	1	0	1	1	1	1	1	90%
5289	1	1	1	1	1	1	1	1	1	1	100%
5290	1	0	1	1	1	1	1	1	1	1	90%
5291	1	1	1	1	1	1	1	1	1	1	100%
5292	1	1	0	1	1	1	1	1	1	1	90%
5293	1	1	1	1	1	1	1	1	1	1	100%
5294	1	0	1	1	1	1	1	1	1	1	90%
5295	1	1	1	1	1	1	1	1	1	1	100%
5296	1	1	1	1	0	1	1	1	1	1	90%
5297	1	1	0	1	1	1	1	1	1	1	90%
5298	1	1	1	1	1	1	1	1	1	1	100%
5299	1	1	1	1	1	0	1	1	1	1	90%
5300	1	1	1	1	1	1	1	1	1	1	100%
5301	1	1	1	0	1	1	1	1	1	1	90%
5302	1	1	1	1	1	0	1	1	1	1	90%
5303	1	1	1	1	1	1	1	1	1	0	90%
5304	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	0	1	1	1	1	90%
5306	0	1	1	1	1	1	1	1	1	1	90%
5307	1	1	1	1	0	1	1	1	1	1	90%
5308	1	1	1	1	1	1	1	1	1	1	100%
5309	1	1	1	1	1	1	1	1	1	1	100%
5310	1	1	1	1	1	1	1	1	1	1	100%
5311	1	1	1	1	1	1	1	1	1	1	100%
5312	1	1	1	1	0	1	1	1	1	1	90%
5313	1	1	1	1	1	0	1	1	1	1	90%
5314	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5316	1	1	1	1	1	1	1	1	1	1	100%
5317	1	1	1	1	1	1	1	1	1	1	100%
5318	1	1	1	1	1	1	1	1	1	1	100%
5319	1	1	1	1	1	1	1	0	1	1	90%
5320	1	1	1	1	1	1	1	1	1	0	90%
5321	1	1	1	1	1	1	1	1	1	1	100%
5322	1	1	0	1	1	1	1	1	1	1	90%
5323	1	1	1	1	1	1	1	0	1	1	90%
5324	1	1	1	1	1	1	1	1	1	0	90%
5325	1	1	1	1	1	1	1	1	1	1	100%
5326	0	1	1	1	1	1	1	1	1	1	90%
5327	1	1	1	1	1	1	0	1	1	1	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 189 von 256
 Page 189 of 256

5328	1	1	1	1	1	1	1	1	1	0	90%
5329	1	1	1	1	1	0	1	1	1	1	90%
5330(HF)	1	1	1	1	1	1	1	1	1	1	100%
5331	0	0	0	0	0	0	0	0	0	0	0%
160 MHz Detection Bandwidth = $F_h - F_l = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$											
EUT 99% Bandwidth = 156.1MHz											

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.

Seite 194 von 256
Page 194 of 256

160 MHz Detection Bandwidth = $F_h - F_l = 5650\text{MHz} - 5490\text{MHz} = 160\text{MHz}$

EUT 99% Bandwidth = 156.8MHz

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 195 von 256
Page 195 of 256**<Statistical Performance Check for Traffic Mode>****Modulation Mode: 802.11ax HE20 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	28	93%	60%	Pass
3	30	26	87%	60%	Pass
4	30	26	87%	60%	Pass
Average			91%	80%	Pass
5	30	28	93%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 196 von 256
 Page 196 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	0
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	0
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 198 von 256
 Page 198 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	0
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	0
14	7.2	323	16	5168	0
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	0
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 199 von 256
 Page 199 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	0
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	0
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	0
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	0
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 200 von 256
 Page 200 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.32	1
2	8	1.5	12	5.32	1
3	11	1.0909091	12	5.32	1
4	20	0.6	12	5.32	1
5	17	0.7058824	12	5.32	1
6	14	0.8571429	12	5.32	1
7	15	0.8	12	5.32	1
8	12	1	12	5.32	1
9	14	0.8571429	12	5.32	1
10	8	1.5	12	5.32	1
11	17	0.7058824	12	5.317	1
12	19	0.6315789	12	5.318	1
13	15	0.8	12	5.315	1
14	12	1	12	5.314	0
15	19	0.6315789	12	5.317	1
16	14	0.8571429	12	5.315	1
17	20	0.6	12	5.318	1
18	12	1	12	5.314	0
19	14	0.8571429	12	5.315	1
20	12	1	12	5.314	1
21	16	0.75	12	5.324	1
22	12	1	12	5.326	1
23	20	0.6	12	5.322	1
24	14	0.8571429	12	5.325	1
25	13	0.9230769	12	5.325	1
26	8	1.5	12	5.328	1
27	17	0.7058824	12	5.323	1
28	19	0.6315789	12	5.322	1
29	12	1	12	5.326	1
30	18	0.6666667	12	5.323	1
Detection Percentage				Limit >80%	93%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 202 von 256
Page 202 of 256**Modulation Mode: 802.11ax HE20 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	28	93%	60%	Pass
3	30	26	87%	60%	Pass
4	30	27	90%	60%	Pass
Average			92%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 204 von 256
 Page 204 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	0
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	0
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 205 von 256
 Page 205 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	0
19	7.9	349	17	5933	0
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	0
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	0
Detection Percentage				Limit >60%	87%

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	0
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	0
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 207 von 256
 Page 207 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detecti on Blank=No Detection
1	15	0.8	12	5.5	1
2	8	1.5	12	5.5	1
3	11	1.090909091	12	5.5	1
4	20	0.6	12	5.5	1
5	17	0.705882353	12	5.5	1
6	14	0.857142857	12	5.5	1
7	15	0.8	12	5.5	1
8	12	1	12	5.5	1
9	14	0.857142857	12	5.5	1
10	8	1.5	12	5.5	1
11	17	0.705882353	12	5.497	1
12	19	0.631578947	12	5.498	1
13	15	0.8	12	5.496	1
14	12	1	12	5.494	1
15	19	0.631578947	12	5.498	1
16	14	0.857142857	12	5.495	1
17	20	0.6	12	5.498	1
18	12	1	12	5.494	1
19	14	0.857142857	12	5.495	1
20	12	1	12	5.494	1
21	16	0.75	12	5.504	1
22	12	1	12	5.506	1
23	20	0.6	12	5.502	1
24	14	0.857142857	12	5.505	1
25	13	0.923076923	12	5.505	1
26	8	1.5	12	5.508	1
27	17	0.705882353	12	5.503	1
28	19	0.631578947	12	5.502	1
29	12	1	12	5.506	1
30	18	0.666666667	12	5.503	1
Detection Percentage				Limit >90%	100

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 209 von 256
Page 209 of 256**Modulation Mode: 802.11ax HE40 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	28	93%	60%	Pass
3	30	27	90%	60%	Pass
4	30	21	70%	60%	Pass
Average			88%	80%	Pass
5	30	28	93%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 210 von 256
 Page 210 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 211 von 256
 Page 211 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	0
9	3.1	164	26	4264	1
10	1.2	156	23	3588	0
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 212 von 256
 Page 212 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	0
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	0
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	0
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 213 von 256
 Page 213 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	0
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	0
10	11.5	223	12	2676	0
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	0
17	19.9	324	16	5184	1
18	14.1	271	13	3523	0
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	0
24	15.3	278	14	3892	0
25	14.5	317	13	4121	1
26	11.3	260	12	3120	0
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	0
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	70%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 214 von 256
 Page 214 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.31	1
2	8	1.5	12	5.31	1
3	11	1.090909	12	5.31	1
4	20	0.6	12	5.31	1
5	17	0.705882	12	5.31	1
6	14	0.857143	12	5.31	1
7	15	0.8	12	5.31	1
8	12	1	12	5.31	1
9	14	0.857143	12	5.31	1
10	8	1.5	12	5.31	1
11	17	0.705882	12	5.297	1
12	19	0.631579	12	5.298	1
13	15	0.8	12	5.296	1
14	12	1	12	5.295	1
15	19	0.631579	12	5.298	1
16	14	0.857143	12	5.296	1
17	20	0.6	12	5.299	1
18	12	1	12	5.295	1
19	14	0.857143	12	5.296	1
20	12	1	12	5.295	0
21	16	0.75	12	5.323	1
22	12	1	12	5.326	1
23	20	0.6	12	5.321	1
24	14	0.857143	12	5.324	1
25	13	0.923077	12	5.325	1
26	8	1.5	12	5.327	1
27	17	0.705882	12	5.323	1
28	19	0.631579	12	5.322	1
29	12	1	12	5.325	0
30	18	0.666667	12	5.322	1
Detection Percentage				Limit >80%	93%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 215 von 256
 Page 215 of 256

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 216 von 256
Page 216 of 256**Modulation Mode: 802.11ax HE40 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	28	93%	60%	Pass
3	30	24	80%	60%	Pass
4	30	23	77%	60%	Pass
Average			87%	80%	Pass
5	30	28	93%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 217 von 256
 Page 217 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 218 von 256
 Page 218 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	0
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	0
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	93%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 219 von 256
 Page 219 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	0
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	0
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	0
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	0
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	0
22	7.2	254	16	4064	0
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	80%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 220 von 256
 Page 220 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	0
6	15.3	432	14	6048	1
7	15.9	207	14	2898	0
8	14.3	443	13	5759	0
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	0
18	14.1	271	13	3523	1
19	15.2	349	14	4886	0
20	13.8	409	13	5317	0
21	17.1	373	15	5595	1
22	13.8	254	13	3302	0
23	19.8	274	16	4384	1
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 221 von 256
 Page 221 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.51	1
2	8	1.5	12	5.51	1
3	11	1.090909	12	5.51	1
4	20	0.6	12	5.51	1
5	17	0.705882	12	5.51	1
6	14	0.857143	12	5.51	1
7	15	0.8	12	5.51	1
8	12	1	12	5.51	1
9	14	0.857143	12	5.51	1
10	8	1.5	12	5.51	1
11	17	0.705882	12	5.497	1
12	19	0.631579	12	5.499	1
13	15	0.8	12	5.496	1
14	12	1	12	5.495	0
15	19	0.631579	12	5.498	1
16	14	0.857143	12	5.496	1
17	20	0.6	12	5.499	1
18	12	1	12	5.495	1
19	14	0.857143	12	5.496	1
20	12	1	12	5.495	1
21	16	0.75	12	5.523	1
22	12	1	12	5.525	1
23	20	0.6	12	5.521	1
24	14	0.857143	12	5.524	1
25	13	0.923077	12	5.525	1
26	8	1.5	12	5.527	1
27	17	0.705882	12	5.523	1
28	19	0.631579	12	5.521	0
29	12	1	12	5.525	1
30	18	0.666667	12	5.522	1
Detection Percentage				Limit >80%	93%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 223 von 256
Page 223 of 256**Modulation Mode: 802.11ax HE80 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	27	90%	60%	Pass
2	30	27	90%	60%	Pass
3	30	24	80%	60%	Pass
4	30	21	70%	60%	Pass
Average			83%	80%	Pass
5	30	29	97%	80%	Pass
6	30	30	100%	70%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	0
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	0
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 225 von 256
 Page 225 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	0
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	0
29	2.4	224	25	5600	0
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	90%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	0
6	7.9	432	17	7344	1
7	8.2	207	17	3519	1
8	7.5	443	17	7531	0
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	0
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	1
15	9.5	297	18	5346	0
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	0
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	0
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	80%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 227 von 256
 Page 227 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	0
10	11.5	223	12	2676	0
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	0
17	19.9	324	16	5184	1
18	14.1	271	13	3523	1
19	15.2	349	14	4886	1
20	13.8	409	13	5317	0
21	17.1	373	15	5595	0
22	13.8	254	13	3302	1
23	19.8	274	16	4384	0
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	0
27	17.3	211	15	3165	1
28	19.2	272	16	4352	0
29	14.2	264	13	3432	0
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	70%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 228 von 256
 Page 228 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.29	1
2	8	1.5	12	5.29	1
3	11	1.0909091	12	5.29	1
4	20	0.6	12	5.29	1
5	17	0.7058824	12	5.29	1
6	14	0.8571429	12	5.29	1
7	15	0.8	12	5.29	1
8	12	1	12	5.29	1
9	14	0.8571429	12	5.29	1
10	8	1.5	12	5.29	1
11	17	0.7058824	12	5.258	1
12	19	0.6315789	12	5.259	1
13	15	0.8	12	5.256	1
14	12	1	12	5.255	1
15	19	0.6315789	12	5.258	1
16	14	0.8571429	12	5.256	1
17	20	0.6	12	5.259	1
18	12	1	12	5.255	1
19	14	0.8571429	12	5.256	1
20	12	1	12	5.255	1
21	16	0.75	12	5.323	1
22	12	1	12	5.325	1
23	20	0.6	12	5.321	0
24	14	0.8571429	12	5.324	1
25	13	0.9230769	12	5.324	1
26	8	1.5	12	5.327	1
27	17	0.7058824	12	5.322	1
28	19	0.6315789	12	5.321	1
29	12	1	12	5.325	1
30	18	0.6666667	12	5.322	1
Detection Percentage				Limit >80%	97%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 230 von 256
Page 230 of 256**Modulation Mode: 802.11ax HE80 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	29	97%	60%	Pass
3	30	23	77%	60%	Pass
4	30	23	77%	60%	Pass
Average			87%	80%	Pass
5	30	29	97%	80%	Pass
6	30	30	100%	70%	Pass

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 231 von 256
 Page 231 of 256

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	0
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 233 von 256
 Page 233 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	1
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	0
8	7.5	443	17	7531	0
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	0
15	9.5	297	18	5346	1
16	8	412	17	7004	0
17	10	324	18	5832	1
18	7.4	271	17	4607	0
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	0
23	9.9	274	18	4932	1
24	7.9	278	17	4726	0
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	1
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 234 von 256
 Page 234 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	0
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	0
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	0
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	0
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	0
23	19.8	274	16	4384	0
24	15.3	278	14	3892	1
25	14.5	317	13	4121	1
26	11.3	260	12	3120	1
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	0
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 235 von 256
 Page 235 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.53	1
2	8	1.5	12	5.53	1
3	11	1.0909091	12	5.53	1
4	20	0.6	12	5.53	1
5	17	0.7058824	12	5.53	1
6	14	0.8571429	12	5.53	1
7	15	0.8	12	5.53	1
8	12	1	12	5.53	1
9	14	0.8571429	12	5.53	1
10	8	1.5	12	5.53	1
11	17	0.7058824	12	5.498	1
12	19	0.6315789	12	5.499	0
13	15	0.8	12	5.496	1
14	12	1	12	5.495	1
15	19	0.6315789	12	5.498	1
16	14	0.8571429	12	5.496	1
17	20	0.6	12	5.499	1
18	12	1	12	5.495	1
19	14	0.8571429	12	5.496	1
20	12	1	12	5.495	1
21	16	0.75	12	5.563	1
22	12	1	12	5.565	1
23	20	0.6	12	5.561	1
24	14	0.8571429	12	5.564	1
25	13	0.9230769	12	5.564	1
26	8	1.5	12	5.567	1
27	17	0.7058824	12	5.562	1
28	19	0.6315789	12	5.561	1
29	12	1	12	5.565	1
30	18	0.6666667	12	5.562	1
Detection Percentage				Limit >80%	97%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 237 von 256
Page 237 of 256**Modulation Mode: 802.11ax HE160 (Band 2)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	29	97%	60%	Pass
3	30	26	87%	60%	Pass
4	30	23	77%	60%	Pass
Average			89%	80%	Pass
5	30	29	97%	80%	Pass
6	30	30	100%	70%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	1
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	0
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 239 von 256
 Page 239 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	0
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 240 von 256
 Page 240 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	0
3	7.1	344	16	5504	1
4	9.8	288	18	5184	1
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	0
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	0
14	7.2	323	16	5168	1
15	9.5	297	18	5346	1
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	1
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	1
28	9.7	272	18	4896	0
29	7.4	264	17	4488	1
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	87%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 241 von 256
 Page 241 of 256

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	1
6	15.3	432	14	6048	0
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	0
17	19.9	324	16	5184	0
18	14.1	271	13	3523	0
19	15.2	349	14	4886	0
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	1
24	15.3	278	14	3892	0
25	14.5	317	13	4121	1
26	11.3	260	12	3120	0
27	17.3	211	15	3165	1
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	77%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 242 von 256
 Page 242 of 256

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.29	1
2	8	1.5	12	5.29	1
3	11	1.0909091	12	5.29	1
4	20	0.6	12	5.29	1
5	17	0.7058824	12	5.29	1
6	14	0.8571429	12	5.29	1
7	15	0.8	12	5.29	1
8	12	1	12	5.29	1
9	14	0.8571429	12	5.29	1
10	8	1.5	12	5.29	1
11	17	0.7058824	12	5.256	1
12	19	0.6315789	12	5.258	1
13	15	0.8	12	5.255	1
14	12	1	12	5.254	0
15	19	0.6315789	12	5.257	1
16	14	0.8571429	12	5.255	1
17	20	0.6	12	5.258	1
18	12	1	12	5.254	1
19	14	0.8571429	12	5.255	1
20	12	1	12	5.254	1
21	16	0.75	12	5.324	1
22	12	1	12	5.326	1
23	20	0.6	12	5.322	1
24	14	0.8571429	12	5.325	1
25	13	0.9230769	12	5.326	1
26	8	1.5	12	5.328	1
27	17	0.7058824	12	5.324	1
28	19	0.6315789	12	5.322	1
29	12	1	12	5.326	1
30	18	0.6666667	12	5.323	1
Detection Percentage				Limit >80%	97%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 243 von 256
 Page 243 of 256

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: **CN23MIDW 001**
Test Report No.Seite 244 von 256
Page 244 of 256**Modulation Mode: 802.11ax HE160 (Band 3)**

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass
2	30	30	100%	60%	Pass
3	30	22	73%	60%	Pass
4	30	24	80%	60%	Pass
Average			88%	80%	Pass
5	30	30	100%	80%	Pass
6	30	30	100%	70%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 246 von 256
 Page 246 of 256

Type 2 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	3.2	179	26	4654	1
2	1.1	207	23	4761	1
3	2.1	230	24	5520	1
4	4.8	200	29	5800	1
5	3.9	214	28	5992	1
6	2.9	222	26	5772	1
7	3.2	204	26	5304	1
8	2.5	192	25	4800	1
9	3.1	164	26	4264	1
10	1.2	156	23	3588	1
11	3.9	210	27	5670	1
12	4.6	201	29	5829	1
13	3.2	162	26	4212	1
14	2.2	197	25	4925	1
15	4.5	163	29	4727	1
16	3	203	26	5278	1
17	5	168	29	4872	1
18	2.4	217	25	5425	1
19	2.9	191	26	4966	1
20	2.3	166	25	4150	1
21	3.7	150	27	4050	1
22	2.2	176	25	4400	1
23	4.9	195	29	5655	1
24	2.9	202	26	5252	1
25	2.5	178	25	4450	1
26	1.1	206	23	4738	1
27	3.8	155	27	4185	1
28	4.7	157	29	4553	1
29	2.4	224	25	5600	1
30	4.2	159	28	4452	1
Detection Percentage				Limit >60%	100%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 247 von 256
 Page 247 of 256

Type 3 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	8.2	355	17	6035	1
2	6.1	487	16	7792	0
3	7.1	344	16	5504	1
4	9.8	288	18	5184	0
5	8.9	230	18	4140	1
6	7.9	432	17	7344	1
7	8.2	207	17	3519	0
8	7.5	443	17	7531	1
9	8.1	439	17	7463	1
10	6.2	223	16	3568	1
11	8.9	208	18	3744	1
12	9.6	463	18	8334	1
13	8.2	441	17	7497	1
14	7.2	323	16	5168	0
15	9.5	297	18	5346	0
16	8	412	17	7004	1
17	10	324	18	5832	1
18	7.4	271	17	4607	0
19	7.9	349	17	5933	1
20	7.3	409	16	6544	1
21	8.7	373	18	6714	1
22	7.2	254	16	4064	1
23	9.9	274	18	4932	1
24	7.9	278	17	4726	1
25	7.5	317	17	5389	1
26	6.1	260	16	4160	1
27	8.8	211	18	3798	0
28	9.7	272	18	4896	1
29	7.4	264	17	4488	0
30	9.2	284	18	5112	1
Detection Percentage				Limit >60%	73%

Type 4 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	16	355	14	4970	1
2	11.3	487	12	5844	1
3	13.5	344	13	4472	1
4	19.4	288	16	4608	1
5	17.5	230	15	3450	0
6	15.3	432	14	6048	1
7	15.9	207	14	2898	1
8	14.3	443	13	5759	1
9	15.8	439	14	6146	1
10	11.5	223	12	2676	1
11	17.4	208	15	3120	1
12	19	463	16	7408	1
13	16	441	14	6174	1
14	13.8	323	13	4199	1
15	18.9	297	16	4752	1
16	15.5	412	14	5768	1
17	19.9	324	16	5184	1
18	14.1	271	13	3523	0
19	15.2	349	14	4886	1
20	13.8	409	13	5317	1
21	17.1	373	15	5595	1
22	13.8	254	13	3302	1
23	19.8	274	16	4384	0
24	15.3	278	14	3892	0
25	14.5	317	13	4121	0
26	11.3	260	12	3120	1
27	17.3	211	15	3165	0
28	19.2	272	16	4352	1
29	14.2	264	13	3432	1
30	18.2	284	15	4260	1
Detection Percentage				Limit >60%	80%

Type 5 Radar Statistical Performance

Trial Number	Number of Bursts	Burst Period(s)	Waveform Length(s)	Center Frequency (GHz)	1=Detection Blank=No Detection
1	15	0.8	12	5.57	1
2	8	1.5	12	5.57	1
3	11	1.0909091	12	5.57	1
4	20	0.6	12	5.57	1
5	17	0.7058824	12	5.57	1
6	14	0.8571429	12	5.57	1
7	15	0.8	12	5.57	1
8	12	1	12	5.57	1
9	14	0.8571429	12	5.57	1
10	8	1.5	12	5.57	1
11	17	0.7058824	12	5.498	1
12	19	0.6315789	12	5.499	1
13	15	0.8	12	5.497	1
14	12	1	12	5.496	1
15	19	0.6315789	12	5.499	1
16	14	0.8571429	12	5.496	1
17	20	0.6	12	5.5	1
18	12	1	12	5.496	1
19	14	0.8571429	12	5.496	1
20	12	1	12	5.496	1
21	16	0.75	12	5.642	1
22	12	1	12	5.645	1
23	20	0.6	12	5.64	1
24	14	0.8571429	12	5.644	1
25	13	0.9230769	12	5.644	1
26	8	1.5	12	5.646	1
27	17	0.7058824	12	5.642	1
28	19	0.6315789	12	5.641	1
29	12	1	12	5.644	1
30	18	0.6666667	12	5.642	1
Detection Percentage				Limit >80%	100%

Note: Type 5 radar parameter data sheet, please refer to Appendix E

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

 Seite 250 von 256
 Page 250 of 256

Type 6 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	333.335	9	0.3333	1
2	1	333.335	9	0.3333	1
3	1	333.335	9	0.3333	1
4	1	333.335	9	0.3333	1
5	1	333.335	9	0.3333	1
6	1	333.335	9	0.3333	1
7	1	333.335	9	0.3333	1
8	1	333.335	9	0.3333	1
9	1	333.335	9	0.3333	1
10	1	333.335	9	0.3333	1
11	1	333.335	9	0.3333	1
12	1	333.335	9	0.3333	1
13	1	333.335	9	0.3333	1
14	1	333.335	9	0.3333	1
15	1	333.335	9	0.3333	1
16	1	333.335	9	0.3333	1
17	1	333.335	9	0.3333	1
18	1	333.335	9	0.3333	1
19	1	333.335	9	0.3333	1
20	1	333.335	9	0.3333	1
21	1	333.335	9	0.3333	1
22	1	333.335	9	0.3333	1
23	1	333.335	9	0.3333	1
24	1	333.335	9	0.3333	1
25	1	333.335	9	0.3333	1
26	1	333.335	9	0.3333	1
27	1	333.335	9	0.3333	1
28	1	333.335	9	0.3333	1
29	1	333.335	9	0.3333	1
30	1	333.335	9	0.3333	1
Detection Percentage				Limit >70%	100%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE20 (Band 3)

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE40

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE80

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.
Modulation Mode: TDWR 802.11ax HE160

Radar Type	Number of Trials	Number of Successful Detections	Probability	Limit	Result
1	30	29	97%	60%	Pass

Type 1 Radar Statistical Performance

Trial Number	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length(us)	1=Detection Blank=No Detection
1	1	938	57	53466	1
2	1	698	76	53048	1
3	1	618	86	53148	1
4	1	538	99	53262	1
5	1	878	61	53558	1
6	1	3066	18	55188	1
7	1	638	83	52954	1
8	1	918	58	53244	1
9	1	838	63	52794	1
10	1	858	62	53196	1
11	1	798	67	53466	1
12	1	718	74	53132	0
13	1	578	92	53176	1
14	1	598	89	53222	1
15	1	558	95	53010	1
16	1	2536	21	53256	1
17	1	966	55	53130	1
18	1	827	64	52928	1
19	1	2501	22	55022	1
20	1	2595	21	54495	1
21	1	1114	48	53472	1
22	1	1302	41	53382	1
23	1	3045	18	54810	1
24	1	1624	33	53592	1
25	1	2878	19	54682	1
26	1	1027	52	53404	1
27	1	2485	22	54670	1
28	1	1600	33	52800	1
29	1	1172	46	53912	1
30	1	1177	45	52965	1
Detection Percentage				Limit >60%	97%

Please refer to Appendix E for Radar Test Waveform.

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted emissions as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

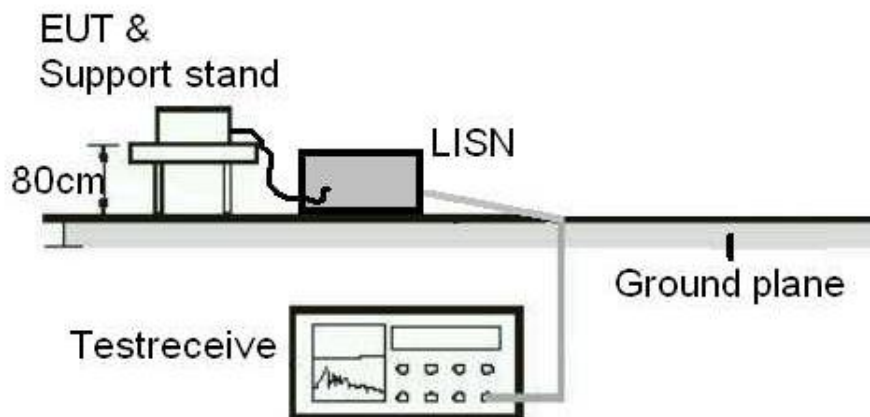

Test Instruments

Test Period: 2023-12-06

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2023/10/23	2024/10/21
EMI Test Receiver	R&S	ESCI	100797	2023/7/21	2024/7/19

Prüfbericht - Nr.: CN23MIDW 001
Test Report No.

Seite 256 von 256
Page 256 of 256

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.