

TEST REPORT

Report Number: 3123616MPK-001

Project Number: 3123616

May 31, 2007

**Testing performed on the
Triple Trunking Hand Held Scanner**

Model Number: 0609

FCC ID: ADV0609

to

FCC Part 15, Subpart B

Class: B

for

GRE America



A2LA Certificate Number: 1755-01

Test Performed by:

Intertek
1365 Adams Court
Menlo Park, CA 94025

Test Authorized by:

GRE America
425 Harbor Blvd. Suit B
Belmont, CA 94002

Prepared by:



Krishna K Vemuri

Date: May 31, 2007

Reviewed by:



Ollie Moyrong

Date: May 31, 2007

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

VERIFICATION OF COMPLIANCE
Report No. 3123616MPK-001

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.
--

Equipment Under Test:	Triple Trunking Hand Held Scanner
Trade Name:	GRECOM
Model No.:	0609
Serial No.	000011
Applicant:	GRE America
Contact:	Mr. Teru Takahashi
Address:	425 Harbor Blvd. Suite B Belmont, CA 94002
Country	USA
Tel. number:	650-591-1400
Fax number:	650-591-2001
Applicable Regulation:	FCC Part 15, Subpart B
Equipment Class:	Class B
Date of Test:	May 29 and 30, 2007

We attest to the accuracy of this report:

A handwritten signature in blue ink, appearing to read "Krishna K Vemuri".

Krishna K Vemuri
Test Engineer

A handwritten signature in blue ink, appearing to read "Ollie Moyrong".

Ollie Moyrong
EMC Department Manager

TABLE OF CONTENTS

1.0	General Description	4
1.1	Product Description	4
1.2	Related Submittal(s) Grants	4
1.3	Test Methodology	4
1.4	Test Facility	4
1.5	Summary of Test Results	5
2.0	System Test Configuration.....	6
2.1	Justification.....	6
2.2	EUT Exercising Software	6
2.3	Mode of Operation.....	6
2.4	Support Equipment List and Description.....	7
2.5	Equipment Setup Block Diagram	7
2.6	Equipment Modification	8
3.0	Emission Test Results	9
3.1	Field Strength Calculation	10
3.2	Radiated Emission Data.....	11
3.3	AC Line Conducted Emission Data.....	13
3.4	Antenna Conducted Emission Data	15
4.0	List of Test Equipment	19
	Appendix A – EUT Specification.....	20
	Appendix B – Local Oscillator Frequency calculation.....	21
	Appendix C – Antenna Drawing	22

1.0 General Description

1.1 Product Description

The Equipment under Test (EUT) is 1,000 Channel Triple Trunking Hand Held Scanning Receiver, model 0609.

Please refer to the attached specifications sheets in Appendix A for more details.

A pre-production version of the sample was received on May 28, 2007 in good condition. As declared by the Applicant, it is identical to production units.

1.2 Related Submittal(s) Grants

This is a single application for certification of a scanning receiver.

1.3 Test Methodology

Both conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Data Section”** of this Application.

1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1, a 10 meter semi-anechoic chamber. This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

1.5 Summary of Test Results

Model: 0609
FCC ID: ADV0609

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Complies
Antenna Conducted Emission	15.111	Complies
FCC Part 15.121 Requirement	15.121	Complies *

* Refer to file: ADV0609 REPORT FOR FCC RULE PART 15.121

2.0 System Test Configuration

2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

2.3 Mode of Operation

The EUT was tested in two modes:


Test Mode 1: The EUT was set to constantly receive at the low, middle and high channels of each band.

Test Mode 2: The EUT was set to constantly scan a particular band.

2.4 Support Equipment List and Description

Item #	Description	Model No.	Serial No.
1	External headphones	DS	Not Labeled

2.5 Equipment Setup Block Diagram

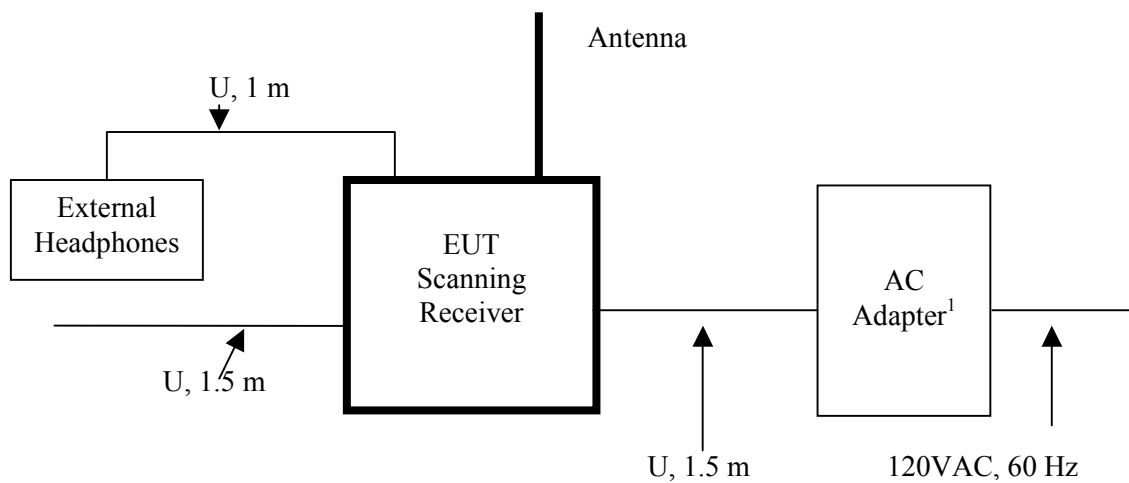

¹ AC adapter: Gemini, Universal AC Adapter, Model: AS499

U: Unshielded
m: meter

2.6 Equipment Modification

Any modifications installed previous to testing by GRE will be incorporated in each production model sold/leased in the United States.

Intertek Testing Services installed no modifications.

3.0 Emission Test Results

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 8000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Preliminary tests were performed to determine the worst-case emission with the EUT tuned to the low, middle and high channels of each band. From these preliminary measurements the EUT was tuned to the frequency with the highest emission and the final scan was performed using the automated test software.

The same procedure was used to determine the worst-case emission level with the EUT setup in scanning mode for each band.

The final recorded data reflects the worst-case result.

A sample calculation and data tables of the emissions are included.

All measurements were performed with peak detection unless otherwise specified.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

3.2 Radiated Emission Data

Tested By:	Krishna K Vemuri
Test Date:	May 29, 2007

Temperature (°C)	20 °C
Relative Humidity (%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by 14.3 dB at 1300 MHz
-----------------	--

3.2 Test Data (Continued)

Model: 0609

Test Mode: Receiving

Test distance: 3 m

FCC Part 15.109 Class B Radiated Emissions Data

Tuned Frequency	L.O. Frequency	Antenna Polarization	Corrected Reading	Limit at 3 m	Margin	SA Reading	Amp Gain	Cable Loss	Ant
MHz	MHz	H/V	dB(uV/m)	dB(uV/m)	dB	dBuV	dB	dB	dB/m
25	405.8	H	22.5	46.0	-23.5	37.4	36.2	5.9	15.4
39	419.8	H	21.9	46.0	-24.1	36.1	36.2	6.0	16.0
54	434.8	H	18.5	46.0	-27.5	33.1	36.2	6.0	15.6
108	488.8	H	23.2	46.0	-22.8	36.5	36.3	6.3	16.7
122.49166	503.29166	H	24.5	46.0	-21.5	37.5	36.4	6.3	17.0
136.99166	517.79166	H	26.0	46.0	-20.0	39	36.4	6.3	17.1
137	517.8	H	26.4	46.0	-19.6	39.4	36.4	6.3	17.1
155.505	536.305	H	25.4	46.0	-20.6	37.7	36.4	6.5	17.6
174	554.8	H	27.1	46.0	-18.9	38.7	36.5	6.5	18.4
216.0025	596.8025	H	21.8	46.0	-24.2	34	36.5	6.7	17.7
257.975	638.775	H	26.1	46.0	-19.9	36.2	36.5	6.8	19.5
299.975	680.775	H	24.6	46.0	-21.4	34.5	36.4	7.2	19.4
300	680.8	H	24.5	46.0	-21.5	34.3	36.4	7.2	19.4
406	786.8	H	25.3	46.0	-20.7	33.8	35.7	7.4	19.8
512	892.8	H	30.8	46.0	-15.2	36.5	34.7	7.7	21.3
764	383.2	H	20.2	46.0	-25.8	35.1	36.1	5.8	15.5
862	481.2	H	21.7	46.0	-24.3	34.7	36.3	6.2	17.1
960	579.2	H	30.0	46.0	-16.0	41.5	36.5	6.6	18.4
1240	859.2	H	28.6	46.0	-17.4	35.1	35.0	7.7	20.9
1270	889.2	H	29.0	46.0	-17.0	34.8	34.7	7.7	21.2
1300	919.2	H	31.7	46.0	-14.3	36.4	34.5	7.8	22.0

- Notes:
1. Negative signs (-) in the Margin column signify levels below the limit.
 2. All readings below 1 GHz are quasi-peak, above 1 GHz – average.
 3. All other readings not reported are at least 20 dB below the limit.
 4. For L.O. frequency calculation, see Appendix B
 5. The EUT was tested in two modes. The worst-case data is reported.

3.3 AC Line Conducted Emission Data



Tested By:	Krishna K Vemuri
Test Date:	May 29, 2007

Temperature	(°C)	20 °C
Relative Humidity	(%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by more than 17.9 dB at 360.4 kHz
-----------------	---

3.3 Test Data (Continued)

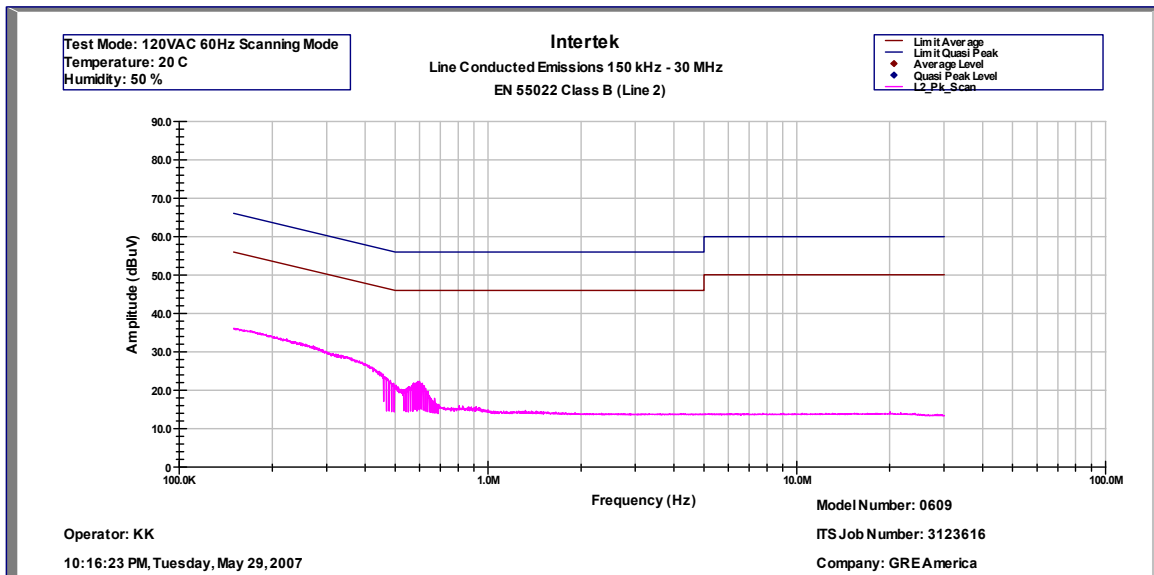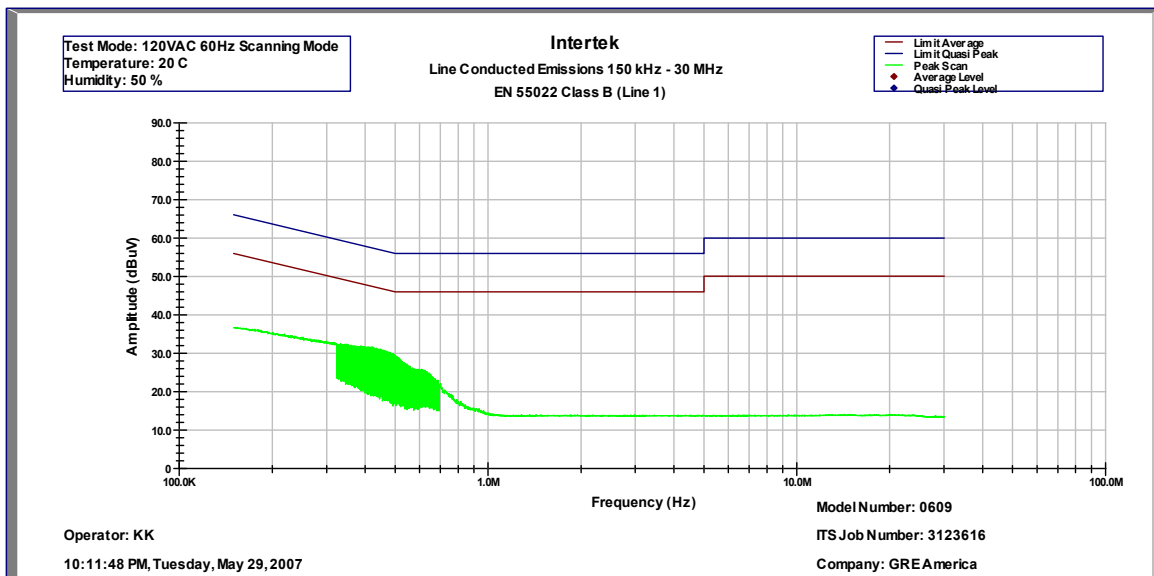

3.4 Antenna Conducted Emission Data

Tested By:	Krishna K Vemuri
Test Date:	May 30, 2007


Temperature	(°C)	20 °C
Relative Humidity	(%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by 4.58 dB at 1.26 GHz
-----------------	--



1 PK
MAXH

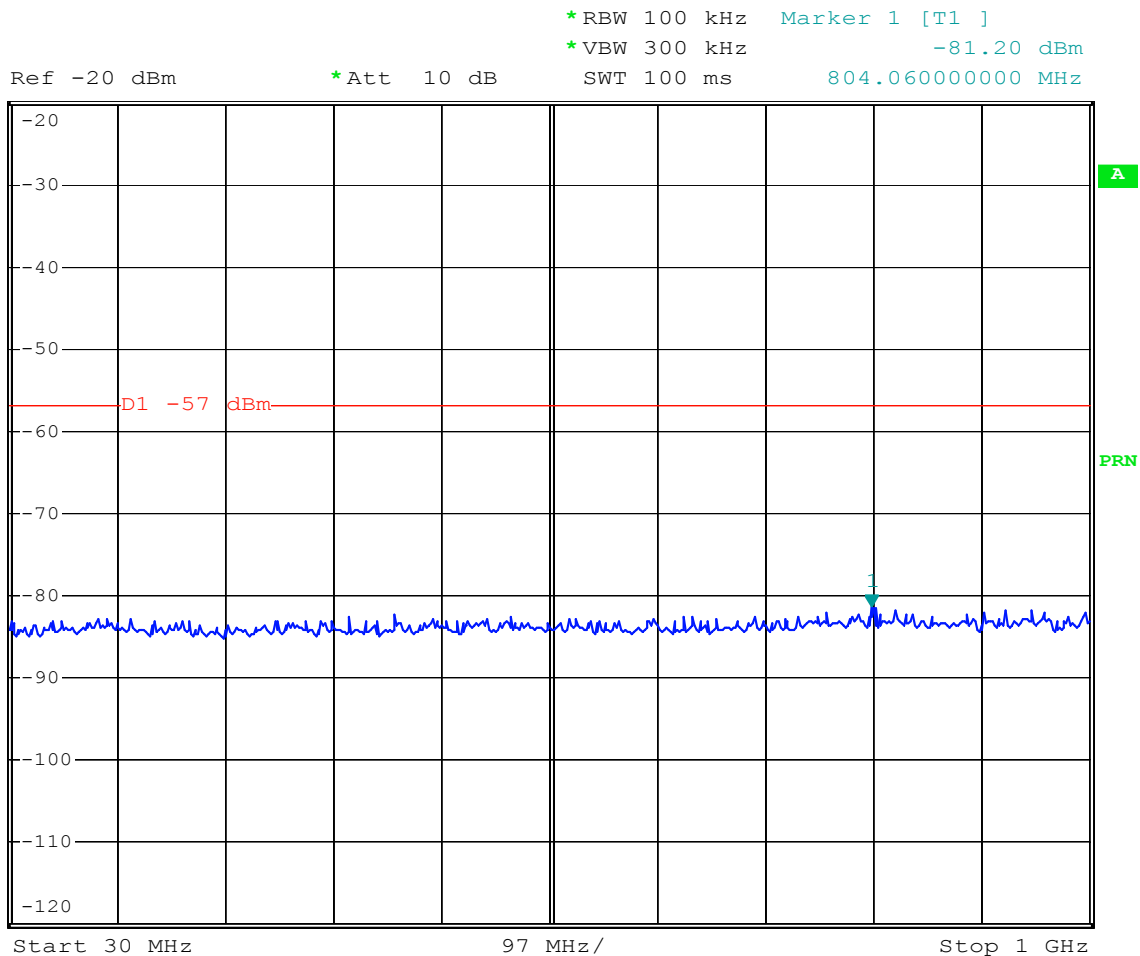


Comment: Scanning Mode
 Date: 30.MAY.2007 18:06:11



*RBW 1 MHz Marker 1 [T1]
 *VBW 30 kHz -61.58 dBm
 *Att 10 dB 1.260000000 GHz
 Ref -20 dBm SWT 70 ms

1 PK
 MAXH

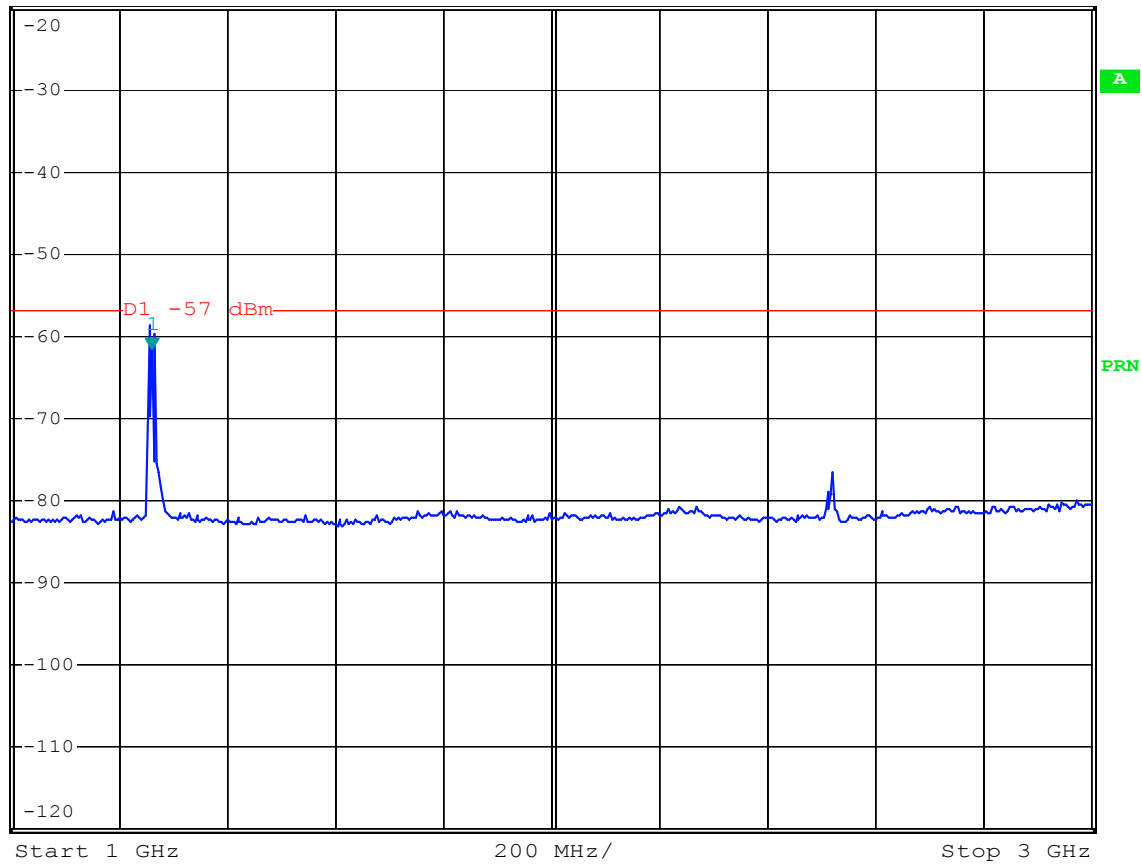


Comment: Scanning Mode
 Date: 30.MAY.2007 18:03:22



*RBW 1 MHz Marker 1 [T1]
 *VBW 30 kHz -73.87 dBm
 Ref -20 dBm *Att 10 dB SWT 170 ms 3.290000000 GHz

1 PK
 MAXH

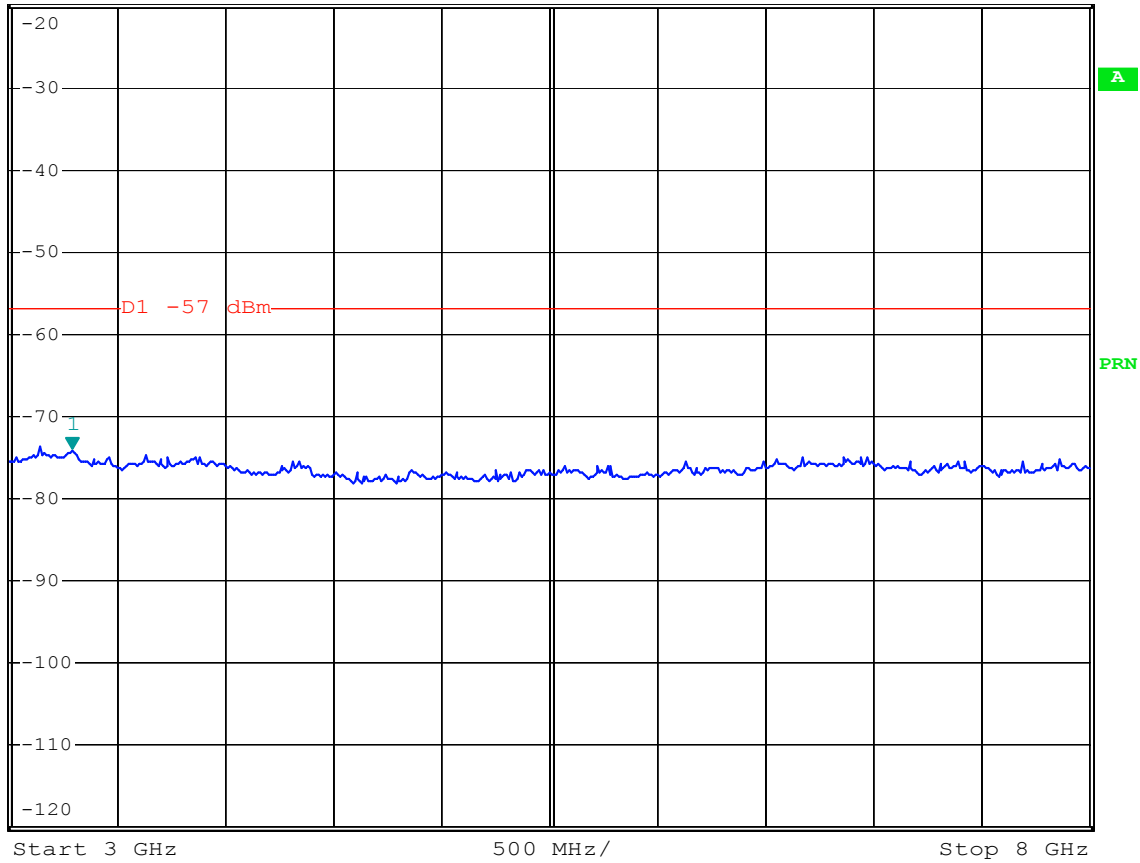

Comment: Scanning Mode
 Date: 30.MAY.2007 18:04:43

4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
Spectrum Analyzer	Rhode-Schwarz	FSP-40	100030	12	9/12/07
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	9/11/07
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	9/11/07
BI-Log Antenna	ARA Inc.	LPB-2513/A	1154	12	8/29/07
LISN	FCC	FCC-LISN-50-50-M-H	2012	12	7/19/07
Pre-Amplifier	Compower	CPPA-102	01256	12	2/27/08

Appendix A – EUT Specification



GENERAL RESEARCH OF ELECTRONICS, INC.

Phone: +813-5439-3611

Fax: +813-5439-3644

SHIBA NO.3 AMEREX BLDG.
No. 12-17 MITA 3-CHOME, MINATO-KU
TOKYO 108-0073, JAPAN

MAY. 15 2007

Reference No. F07002

SPECIFICATIONS

SUBJECT: 1000 CHANNEL FREQUENCY MEMORIES WITH 1500 ID MEMORIES TRUNKING SYSTEM, VHF/UHF PROGRAMMABLE WITH SPECTRUM SWEEPER AND SKYWARN AM/FM SCANNING RECEIVER 0609 (CPU Flash version)

1. GENERAL

- 1.1 Programmable channel : 1000 channels (100 channels x 10 banks)
1500 ID memories (30 location x 5 sub-banks x 10 banks)
7 service search
1 Limit search bank
1 Priority channel
7 WX frequencies
WX alert and SAME receiving with 10 FIPS (Federal information Processing Standard) area code memories
155 preprogrammed frequencies
- 1.2 Receiving mode : AM, FM, FM-MOT (Motorola), LTR (EF Johnson),
EDACS wide(GE/Ericsson/MA-COM), CTCSS and DCS
- 1.3 Receiving system : Triple conversion PLL super heterodyne
- 1st IF 380.8 MHz: The 1st Local OSC frequency for VHF and UHF Low/T band employs upper side of receiving frequency range.
- : The 1st Local OSC frequency for UHF High band employs lower side of receiving frequency range
- 2nd IF 21.4 MHz : The 2nd Local OSC frequency employs lower side of 1st IF

– Continued –

PRODUCT DEVELOPMENT & MANUFACTURING

3rd IF 455 kHz : The 3rd Local OSC frequency employs lower side of 2nd IF.

1.4	Frequency range	:	VHF Low	25.00000 – 54.00000 MHz
			VHF Aircraft	108.00000 – 136.99166 MHz
			VHF High	137.00000 – 174.00000 MHz
				216.00250 – 299.97500 MHz
			UHF Low/T	300.00000 – 512.00000 MHz
			UHF High	764.00000 – 960.00000 MHz
				1240 .00000 – 1300.0000 MHz

1.4.1 Pre-Programmed band search: Marine
CB
FRS/GRMS/MURS
Public safety
Aircraft
Amateur (Ham)
Railroad

1.5 WX frequencies : 162.400, 162.425, 162.450, 162.475, 162.500, 162.525,
162.550 MHz

1.6 Scanning rate : 60 channels/sec.

1.7 Search rate : 78 steps/sec.

1.8 Display : LED back-light LCD with 16 characters X 4 lines with icons

1.9 Zeromatic : Activates during search mode

1.10 Audio output : 250 mWatts

1.11 Signal Stalker band : Public safety band
All frequencies range divided to 10 groups
Group 0 (25 – 54 MHz)
Group 1 (108 – 136.99166 MHz)
Group 2 (137 – 174 MHz)
Group 3 (216.0025 – 299.9750 MHz)
Group 4 (300 – 405.9875 MHz)
Group 5 (406 – 470 MHz)
Group 6 (470.0125 – 512 MHz)
Group 7 (764 – 805.996875 MHz)
Group 8 (806 – 868.9875 MHz)
Group 9 (894 – 960, 1240 – 1300 MHz)

- 1.12 Speaker : Built-in 36 mm 8 Ohms dynamic speaker
- 1.13 Operating voltage : DC 6 Volts "AA" cell x 4 pcs.
- 1.14 Ext. power and charge voltage: DC 9 Volts (regulated)
- 1.15 Dimension : Approx. 65 (W) x 42 (D) x 145 (H) mm
- 1.16 Weight : Approx. 240 g without antenna and batteries
- 1.17 Accessory : Rubber antenna, Owner's manual, Normal Batt. holder, Re-charge Batt. holder and Belt clip
- 1.18 Memory backup : No battery back-up required, EEPROM used

2. ELECTRICAL

Standard Test Condition

- (1) Power source voltage : 6 Volts DC (Battery)
- (2) Antenna impedance : 50 Ohms
- (3) Test temperature : 25 degrees C
- (4) Standard signal level : 100 μ V
- (5) Modulation frequency : 1 kHz
- (6) Reference FM deviation : 3.0 kHz
- (7) Reference AM modulation : 60%
- (8) Reference audio output : 75 mWatts
- (9) Audio output load : 8 Ohm resistive load


2.1 Frequency range	Freq.	Step	Mode (Default)
	25.0000 – 26.9600 MHz	10 kHz	AM
	26.9650 – 27.4050 MHz	10 kHz	AM
	27.4100 – 29.5050 MHz	5 kHz	AM
	29.5100 – 29.7000 MHz	5 kHz	FM
	29.7100 – 49.8300 MHz	10 kHz	FM
	49.8350 – 54.0000 MHz	5 kHz	FM
	108.000 – 136.9916 MHz	8.33 kHz	AM
	137.000 – 137.995 MHz	5 kHz	FM
	138.000 – 143.9875 MHz	12.5 kHz	FM
	144.000 – 147.9950 MHz	5 kHz	FM
	148.000 – 150.7875 MHz	12.5 kHz	FM
	150.800 – 150.8450 MHz	5 kHz	FM
	150.8525 – 154.4975 MHz	7.5 kHz	FM
	154.5150 – 154.6400 MHz	5 kHz	FM
	154.6500 – 156.2550 MHz	7.5 kHz	FM
	156.2750 – 157.4500 MHz	25 kHz	FM

157.4700 – 161.5725 MHz	7.5 kHz	FM
161.6000 – 161.9750 MHz	5 kHz	FM
162.0000 – 174.0000 MHz	12.5 kHz	FM
216.0025 – 219.9975 MHz	5 kHz	FM
220.0000 – 224.9950 MHz	5 kHz	FM
225.0000 – 379.9750 MHz	25 kHz	AM
380.0000 – 419.987500 MHz	12.5 kHz	FM
420.0000 – 450.000000 MHz	5 kHz	FM
450.00625 – 469.99375 MHz	6.25 kHz	FM
470.00000 – 512.00000 MHz	12.5 kHz	FM
764.00000 – 766.996875 MHz	3.125 kHz	FM
773.00000 – 775.996875 MHz	3.125 kHz	FM
794.00000 – 796.996875 MHz	3.125 kHz	FM
803.00000 – 805.996875 MHz	3.125 kHz	FM
806.00000 – 823.987500 MHz	12.5 kHz	FM
849.00000 – 868.987500 MHz	12.5 kHz	FM
894.00000 – 901.987500 MHz	12.5 kHz	FM
902.00000 – 928.000000 MHz	5 kHz	FM
928.00125 – 939.987500 MHz	12.5 kHz	FM
940.00000 – 960.000000 MHz	6.25 kHz	FM
1240.0000 – 1300.00000 MHz	6.25 kHz	FM

Except cellular band: 824 – 848.9875 MHz and 869 – 893.9875 MHz

		Nominal	Limit
2.2	Sensitivity		
	FM: (S+N)/N = 20 dB	VHF Low	0.3 μ V
		VHF Aircraft	0.3 μ V
	Dev.: 3 kHz at 1 kHz	VHF High 137 -174 MHz	0.5 μ V
		216.0025 – 224.975 MHz	0.5 μ V
		225 – 299.975 MHz	0.5 μ V
		UHF Low/T 300 - 405.975 MHz	0.8 μ V
		406 - 512 MHz	0.5 μ V
		UHF High 764 - 960 MHz	0.7 μ V
		1240 - 1300 MHz	0.7 μ V
	AM: (S+N)/N = 20 dB	VHF Low	1 μ V
	Mod.: 60% at 1 kHz	VHF Aircraft	1 μ V
		VHF High 137 -174 MHz	1.5 μ V
		216.0025 – 299.975 MHz	1.5 μ V
		225 – 299.975 MHz	2 μ V
		UHF Low/T 300 - 405.975 MHz	3 μ V
		406 - 512 MHz	2 μ V
		UHF High 764 – 960 MHz	2 μ V
		1240 – 1300 MHz	3 μ V

		Nominal	Limit
2.3	Signal stalker sensitivity : 450 MHz	-60 dBm	-50 dBm
2.4	Data decode sensitivity		
	ED : ED (GE/Ericsson/MA-COM) 4 kHz Dev. at 450, 860 MHz	1 μ V	4 μ V
	MO (Voice channel) : MO (Motorola) 350 Hz Dev. at 174, 450, 860 MHz	0.5 μ V	2 μ V
	MO (Control channel) : MO (Motorola) 4 kHz Dev. at 174, 450, 860 MHz	0.8 μ V	4 μ V
	LTR : LTR (EF Johnson) 800 Hz Dev. at 450, 860 MHz	0.5 μ V	3 μ V
	WX Alert 1050 Hz tone : 3 kHz Dev. at 162.4 MHz	0.3 μ V	1 μ V
	WX Digital Weather Alert : 4 kHz Dev. at 162.4 MHz	0.5 μ V	2 μ V
2.5	CTCSS decode sensitivity : 350 Hz Dev. at 450, 860 MHz	0.5 μ V	3 μ V
2.6	DCS decode sensitivity : 350 Hz Dev. at 450, 860 MHz	0.5 μ V	3 μ V
2.7	WX alert tone decode range : 4 kHz Dev. 2 μ V at 162.400 MHz	1050 \pm 25 Hz	\pm 40 Hz
2.8	WX alert tone checking time : 4 kHz Dev. 2 μ V at 162.400 MHz	2.8 sec.	2 – 5 sec.
	Note: When receiving WX alert in priority operation, the priority sampling time up to 2 sec. is added to this depending on Alert tone transmission timing.		
2.9	WX alert sound level at 1 ft. :	70 dBSPL	60 dBSPL
2.10	Image ratio 1 st IF image :		
	VHF Low at 41 MHz	50 dB	40 dB
	VHF Aircraft at 124 MHz	50 dB	40 dB
	VHF High at 154.1 MHz	50 dB	40 dB
	UHF Low/T at 310 MHz	40 dB	25 dB
	at 450 MHz	50 dB	40 dB
	UHF High at 860 MHz	80 dB	60 dB
	1270 MHz	55 dB	40 dB
	2 nd IF image : VHF High at 154.1 MHz	50 dB	40 dB

			Nominal	Limit
2.11	Attenuator	: VHF Low at 41 MHz	20 dB	17 – 24 dB
		VHF Aircraft at 124 MHz	20 dB	17 – 24 dB
		VHF High at 154.1 MHz	20 dB	17 – 24 dB
		UHF Low/T at 450 MHz	18 dB	10 – 20 dB
		UHF High at 860 MHz	15 dB	8 – 20 dB
		at 1270 MHz	13 dB	8 – 18 dB
2.12	Squelch sensitivity (Band center)			
	Threshold	: AM/FM	0.5 μ V	2 μ V
	Tight: (S+N)/N	: AM	20 dB	10 dB
		FM	25 dB	15 dB
2.13	Selectivity			
	AM 25 – 27.995 MHz	: –6 dB	± 5 kHz	± 7 kHz
		–50 dB	± 6 kHz	± 10 kHz
	Other frequency	: –6 dB	± 10 kHz	± 14 kHz
		–50 dB	± 18 kHz	± 25 kHz
2.14	Spurious rejection (Except Primary image)	: VHF High at 154.1 MHz	40 dB	30 dB
2.15	IF rejection ratio	: 380.8 MHz at 154.1 MHz	60 dB	40 dB
		21.4 MHz at 154.1 MHz	100 dB	80 dB
		Fr 225 – 300 MHz	30 dB	not specified
		300 – 405.975 MHz	10 dB	not specified
2.16	Acceptable radio frequency displacement at EIA RS-204D	:	± 6 kHz	± 3 kHz
2.17	Signal meter indicating	Full Level () at 154.1 MHz	-96 dBm	-94dBm - -98dBm
2.18	Signal to noise ratio	: VHF Low	40 dB	30 dB
	AM/FM	VHF Aircraft	40 dB	30 dB
	RF: 100 μ V	VHF High 138 -174 MHz	40 dB	30 dB
	Dev.: 3 kHz at 1 kHz	216.0025 – 299.975 MHz	40 dB	30 dB
	Mod. 60% at 1 kHz	UHF Low/T 300 - 512 MHz	35 dB	25 dB
		UHF High 764 – 960 MHz	35 dB	25 dB
		1240 – 1300 MHz	35 dB	25 dB
2.19	Residual noise	:	1 mV	3 mV
	Vol. min. and Squelched			

		Nominal	Limit
2.20	Scanning rate without trunking: 138 – 147.9 MHz (in 100 kHz: Intervals)	60 ch/sec.	33 – 66 ch/sec.
2.21	Search rate : at 162.25 – 167.25 MHz	78 steps/sec.	60 – 95 steps/sec.
2.22	Signal Stalker Time : Public safety band	1.1 sec.	1.35 sec.
	One active signal All band	4.8 sec.	6.38 sec.
	the Other no signal		
2.23	Scan and Search delay time :	2 sec.	1 – 3 sec.
2.24	Audio output (T.H.D. 10 %) : RF input: 100 μ V at 154.1 MHz 8 Ohms R Load, 1 kHz	170 mWatts	140 mWatts
2.25	T.H.D. at 50 mWatt : RF input: 100 μ V at 154.1 MHz 1 %		5 %
2.26	Audio max. power : RF input: 100 μ V at 154.1 MHz		
	8 Ohm internal speaker	250 mWatts	200 mWatts
	32 Ohm at headphone mono/stereo (each phone)	13/8 mWatts	25 mWatts
2.27	Audio frequency response at : RF input: 100 μ V at 154.1 MHz	300 Hz	200 – 400 Hz
	–6 dB	2.0 kHz	1.5 – 3.0 kHz
2.28	Intermediate frequency : 1 st 380.8 MHz 2 nd 21.4 MHz 3 rd 455 kHz		
2.29	Current drain at 9 Volts : Vol. Max.	180 mA	220 mA
	8 Ohm internal speaker at Squelch	90 mA	110 mA
	154.1 MHz		
2.30	Charging current Ni-MH Battery (1600 mA/h)		
	1) AC adapter charging : current	150 mA	100 – 200 mA
Note: This specification is obtained INPUT: AC 120 V OUTPUT: DC 9V 300mA OUTPUT without the scanner on after ten hours.			
	2) DC adapter (regulated) : charging current (at 9 V)	150 mA	130 – 170 mA

Note: This specification is obtained DC 9 V without the scanner on after ten hours.

	Nominal	Limit
2.31 Battery life at continuous operation		
Alkaline Battery :	22 Hours	Not specified
Ni-MH Battery (1600 mA/h)	18 Hours	Not specified
Note: Test condition EIAJ CP-2905 (1-4-4.1)		
2.32 Birdies and step frequency : Under discussion when search		
2.33 Filter :	Saw filter for 380.8 MHz, Monolithic crystal filter for 21.4 MHz and ceramic filter for 455 kHz	
2.34 Antenna impedance :	50 Ohms	
2.35 Temperature range :	Test to specification between: +18°C – +35°C Operate (Need not meet spec.): -10°C – +60°C	
2.36 Low BATT indicator :	4.0 V	3.8 – 4.3 V

3. OPERATING CONTROLS AND CONNECTIONS

- 3.1 Volume control with power switch
- 3.2 Squelch control
- 3.3 Keyboard (30 keys): FUNCTION, PGM, WX/Skywarn, TRUNK, MANUAL, PRI, TUNE, TEXT, ATT, PAUSE, MODE, ▲, ▼, KEY LOCK/Light, SCAN, SEARCH, L/OUT, ENTER, CL, 1, ABC/2, DEF/3, GHI/4, JKL/5, MNO/6, PQRS/7, TUV/8, WXYZ/9, 0, • and DELAY
- 3.4 LCD display: 16 characters x 4 lines and 8 icons
Frequency, Mode, ch, Bank, etc.
F, T, G, A, S, ▲, ▼, ■■■■■ icons
- 3.5 BNC type antenna connector
- 3.6 Earphone jack (D = 3.5 mm stereo)
- 3.7 External power jack and charge jack
- 3.8 PC Interface use GRE USB cable(No. 30-3290)
- 3.9 Clone jack (D = 3.5 mm stereo)
- 3.10 Battery compartment

4. FEATURES

- 4.1 10 bank and 1000 channel memories for trunking bank and channel combined with conventional mode memory
- 4.2 Multi trunking of Motorola (type I , II and hybrid analog system), EDACS wide and LTR
- 4.3 CTCSS and DCS Sub-audible encoded squelch mode
- 4.4 Scan both trunking channels and conventional channels at same time
- 4.5 1500 ID memories in 10 ID banks, 5 sub-ID memories in each bank and each sub-ID memory has 30 ID locations.
- 4.6 Alphanumeric data entry
- 4.7 Clone the memory to other unit
- 4.8 Spectrum sweeper function (Total 200 lock out frequencies in spectrum sweeper, All Band 150, Public safety Band 50)
- 4.9 Pre-programmed Marine, CB, FRS/GRMS/MURS, Public safety, Aircraft, Amateur(Ham), Railroad, and Weather frequencies
- 4.10 WX alert and SAME receiving with 10 FIPS (Federal Information Processing Standard) area code memories
- 4.11 Skywarn function
- 4.12 Attenuator control (Normal attenuator and Global attenuator)
- 4.13 Built-in power save circuit
- 4.14 Frequency tune mode (Frequency ▲ or ▼)
- 4.15 "Zeromatic" tuning system
- 4.16 Change the direction at the searching by ▲ (up) or ▼ (down)
- 4.17 60 channels/sec. scanning rate and 75 steps/sec. searching rate
- 4.18 2 second scan and search delay
- 4.19 Manual selection for channel
- 4.20 Scan mode [Cleared channels (000.000 freq.) are not scan.]

- 4.21 Deleting a frequency from a channel
- 4.22 1 limit search bank
- 4.23 Key lock for safety
- 4.24 Key tone and alert tone
- 4.25 16 characters x 4 lines dot matrix and 8 icons LCD (Indicate channel numbers, Frequency, ID number and the data on the LCD)
- 4.26 Backlight LCD and key pads
- 4.27 Low battery indicator by LCD
- 4.28 Crystal filter for 2nd IF and Ceramic filter for 3rd IF section
- 4.29 Belt clip and two battery holder attached
- 4.30 50 lock out frequencies per search bank, Public safety, Aircraft, Ham, Railroad ,Limit search (Totaling 250 frequencies)
- 4.31 Frequency lock-out review and Channel lock-out review
- 4.32 155 preprogrammed frequencies

GENERAL RESEARCH OF ELECTRONICS, INC.

Appendix B – Local Oscillator Frequency calculation

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	10	25.0000 ~ 27.4050	A = (FR + 380.800) / 0.075 = A.xxx (Cut away decimal) 1st Local = A x 0.075 1st IF = 1st Local - FR	2nd Local = 1st IF - 21.4	20.9450
	5	27.4100 ~ 29.7000			
	10	29.7100 ~ 49.8300			
	5	49.8350 ~ 54.0000			
VHF High	8.33	108.0000 ~ 136.99166	FR DENOTES Frequency Received.	2nd Local = 1st IF - 21.4	20.9450
	5	137.0000 ~ 137.9950			
	12.5	138.0000 ~ 143.9875			
	5	144.0000 ~ 147.9950			
	12.5	148.0000 ~ 150.7875			
	5	150.8000 ~ 150.8450			
	7.5	150.8525 ~ 154.4975			
	5	154.5150 ~ 154.6400			
	7.5	154.6500 ~ 156.2550			
	25	156.2750 ~ 157.4500			
	7.5	157.4700 ~ 161.5725			
	5	161.6000 ~ 161.9750			
	12.5	162.0000 ~ 174.0000			
	5	216.0025 ~ 224.9950			
UHF Low	25	225.0000 ~ 316.4750		2nd Local = 1st IF - 21.4	20.9450
	"	316.5000 ~ 316.7750	A = (FR + 380.700) / 0.075		
	"	316.8000 ~ 337.8750	A = (FR + 380.800) / 0.075		
	"	337.9000 ~ 338.0750	A = (FR + 380.700) / 0.075		
	"	338.1000 ~ 339.2750	A = (FR + 380.800) / 0.075		
	"	339.3000 ~ 359.4750	A = (FR + 380.700) / 0.075		
	"	359.5000 ~ 379.9750	A = (FR + 380.800) / 0.075		
	12.5	380.0000 ~ 380.7125	"		
	"	380.7250 ~ 380.8000	A = (FR + 380.700) / 0.075		
	"	380.8125 ~ 400.0000	A = (FR + 380.800) / 0.075		
	"	400.0125 ~ 405.9750	A = (FR + 380.700) / 0.075		
	"	405.9875 ~ 419.9875	A = (FR + 380.800) / 0.075		
	5	420.0000 ~ 450.0000	"		
	6.25	450.00625 ~ 469.99375	"		
	12.5	470.0000 ~ 512.0000	"		
UHF High	3.125	764.0000 ~ 766.996875	A = (FR - 380.800) / 0.075 = A.xxx (Cut away decimal) 1st Local = A x 0.075 1st IF = FR - 1st Local	2nd Local = 1st IF - 21.4	20.9450
	"	773.0000 ~ 775.996875			
	"	794.0000 ~ 796.996875			
	"	803.0000 ~ 805.996875			
	12.5	806.0000 ~ 823.9875			
	"	849.0000 ~ 868.9875			
	"	894.0000 ~ 901.9875			
	5	902.0000 ~ 927.9950			
	12.5	928.0000 ~ 939.9875			
	6.25	940.0000 ~ 960.0000			
	"	1240.0000 ~ 1300.0000			

-2 IF FREQUENCY

1st IF : 380.6500 ~ 380.86875Hz

2nd IF : 21.4000MHz

3rd IF : 455kHz

-3 Example

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	5.0	25.0000	$A : 5410.666 = (25.0000 + 380.800) / 0.075$ $= 5410.666$ (Cut away decimal) 1st Local : $405.750 = 5410 \times 0.075$ 1st IF : $380.750 = 405.750 - 25.0000$	$359.350 = 380.750 - 21.4$	20.9450
		40.0000	$5610.666 = (40.0000 + 380.800) / 0.075$ $= 5610.666$ (Cut away decimal) $420.750 = 5610 \times 0.075$ $380.750 = 420.750 - 40.0000$	$359.350 = 380.750 - 21.4$	20.9450
		54.0000	$5797.333 = (54.0000 + 380.800) / 0.075$ $= 5797.333$ (Cut away decimal) $434.775 = 5797 \times 0.075$ $380.775 = 434.775 - 54.0000$	$359.375 = 380.775 - 21.4$	20.9450
VHF High	8.33	108.0000	$6517.333 = (108.0000 + 380.800) / 0.075$ $= 6517.333$ (Cut away decimal) $488.775 = 6517 \times 0.075$ $380.775 = 488.775 - 108.0000$	$359.375 = 380.775 - 21.4$	20.9450
	6.25	154.5275	$7137.7 = (154.5275 + 380.800) / 0.075$ $= 7137.7$ (Cut away decimal) $535.275 = 7137 \times 0.075$ $380.7475 = 535.275 - 154.5275$	$359.350 = 380.7475 - 21.3975$	20.9425
	12.5	174.0000	$7397.333 = (174.0000 + 380.800) / 0.075$ $= 7397.333$ (Cut away decimal) $554.775 = 7397 \times 0.075$ $380.775 = 554.775 - 174.0000$	$359.375 = 380.775 - 21.4$	20.9450
	5.0	216.0025	$7957.366 = (216.0025 + 380.800) / 0.075$ $= 7957.366$ (Cut away decimal) $596.775 = 7957 \times 0.075$ $380.7725 = 596.775 - 216.0025$	$359.370 = 380.7725 - 21.4025$	20.9475
	5.0	225.0000	$8077.333 = (225.0000 + 380.800) / 0.075$ $= 8077.333$ (Cut away decimal) $605.775 = 8077 \times 0.075$ $380.775 = 605.775 - 225.0000$	$359.375 = 380.775 - 21.4$	20.9450

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
UHF Low	25.0	310.0000	$9210.666 = (310.0000 + 380.800) / 0.075$ $= 9210.666$ (Cut away decimal) $690.750 = 9210 \times 0.075$ $380.750 = 690.750 - 310.0000$	$359.350 = 380.750 - 21.4$	20.9450
	6.25	406.0000	$10490.666 = (406.0000 + 380.800) / 0.075$ $= 10490.666$ (Cut away decimal) $786.750 = 10490 \times 0.075$ $380.750 = 786.750 - 406.0000$	$359.350 = 380.750 - 21.4$	20.9450
		446.0000	$11024.000 = (446.0000 + 380.800) / 0.075$ $= 11024.000$ (Cut away decimal) $826.800 = 11024 \times 0.075$ $380.800 = 826.800 - 446.0000$	$359.400 = 380.800 - 21.4$	20.9450
		512.0000	$11904.000 = (512.0000 + 380.800) / 0.075$ $= 11904.000$ (Cut away decimal) $892.800 = 11904 \times 0.075$ $380.800 = 892.800 - 512.0000$	$359.400 = 380.800 - 21.4$	20.9450
UHF High	3.125	764.0000	$5109.333 = (764.0000 - 380.800) / 0.075$ $= 5109.333$ (Cut away decimal) $383.175 = 5109 \times 0.075$ $380.825 = 764.000 - 383.175$	$359.425 = 380.825 - 21.4$	20.9450
	6.25	806.0000	$5669.333 = (806.0000 - 380.800) / 0.075$ $= 5669.333$ (Cut away decimal) $425.175 = 5669 \times 0.075$ $380.825 = 806.000 - 425.175$	$359.425 = 380.825 - 21.4$	20.9450
		860.0000	$6389.333 = (860.0000 - 380.800) / 0.075$ $= 6389.333$ (Cut away decimal) $479.175 = 6389 \times 0.075$ $380.825 = 860.000 - 479.175$	$359.425 = 380.825 - 21.4$	20.9450
		960.0000	$7722.666 = (960.0000 - 380.800) / 0.075$ $= 7722.666$ (Cut away decimal) $579.150 = 7722 \times 0.075$ $380.850 = 960.000 - 579.150$	$359.450 = 380.850 - 21.4$	20.9450
		12400.0000	$11456.000 = (1240.0000 - 380.800) / 0.075$ $= 11456.000$ (Cut away decimal) $859.200 = 11456 \times 0.075$ $380.800 = 1240.000 - 859.200$	$359.400 = 380.800 - 21.4$	20.9450
		1300.0000	$12256.000 = (1300.0000 - 380.800) / 0.075$ $= 12256.000$ (Cut away decimal) $919.200 = 12256 \times 0.075$ $380.800 = 1300.000 - 919.200$	$359.400 = 380.800 - 21.4$	20.9450

Appendix C – Antenna Drawing

Specification No.

SA0500145(1)

SPECIFICATION OF ANTENNA

Customer Name : **GRE (HONG KONG) LTD.**

Product Name : **Rubber Antenna**

Model No. : **RA-16143(G96-002/F)**

CustomerModel No :

Customer Part NO : **GE-04D-1050**

Issued Date : **2006/4/13**

APPROVAL CHOP/SIGN:

Please fax this front page with authorized signature and company chop as customer's approval on samples.

BONDALE IND.LTD.



Bondale Industries Ltd.

Flat E-2, 10/F, Hoi Bun Industrial Building,
6 Wing Yip Street, Kwun Tong, Kowloon, Hong Kong
Tel: (852)2345 0215 Fax: (852)2797 8191
Email: bondale@netvigator.com

博鉅實業有限公司

RUBBER ANTENNA SPECIFICATION

Specification no: SA0500145(1)

CUSTOMER : GRE (HONG KONG) LTD. MODEL: RA-16143(G96-002/F)

1 Application

The antenna specified in this specification is for transceiver.

2 Dimensions

As per Drawing No. RA1614301B002F-G96 attached.

3 Materials

As specified in drawing No. RA1614301B002F-G96

4 Electrical Characteristics

- i) Resonate Frequency : 150/455 MHZ
- ii) Impedance : 50 ohm Nominal(Depend on available ground plane)
- iii) Radiation Pattern : Omni Directional
- iv) Polarization : Vertical
- v) Standing Wave Ratio (S.W.R) : 4.5 or less
- vi) Insulation resistance : 500 M ohm at DC 500V

5 Mechanical characteristics:

- i) The strength of fixing between sleeve and stud shall withstand the following stresses
Vertical Direction: 10.0 kgs
Rotating Direction: 2.0 kgs
- ii) The strength of BNC connector shall withstand : 3.0 kgs.


6 General Characteristics

- i) Storage Temperature : -30°C to 80°C
- ii) Operating Temperature : -30°C to 60°C
- iii) Vibration Test : There shall be no defects in appearance or the mechanical and electrical functions after the antenna being tested by a regular mounting device under the following conditions:
 - a) Displacement : $\pm 5^\circ$ of the axis original position
 - b) Duration : 1000 cycles/minutes
 - c) Time : 5 minutes
- iv) Shock Resistance : Satisfy the electrical and mechanical characteristics after drop down with 100g upon rubber block



7 Others : Any modification of this specification has to be agreed by us.

Prepared By: _____ Checked By: _____ Approval: _____

REV.	ISSUE FOR	OLD DRAWING NO.	80<L<=250	±0.50
①	膠管與連接器連接處加網紋	RA1614301B002E-G96	25<L<=80	±0.40
②	改良上膠水,把上膠水處加大面積	RA1614301B002E-G96	8<L<=25	±0.30
③	連接器彈性圈改為上二片	RA1614301B002E-G96	L<=8	±0.20
線性尺寸L			未注尺寸偏差	
			未注明公差	

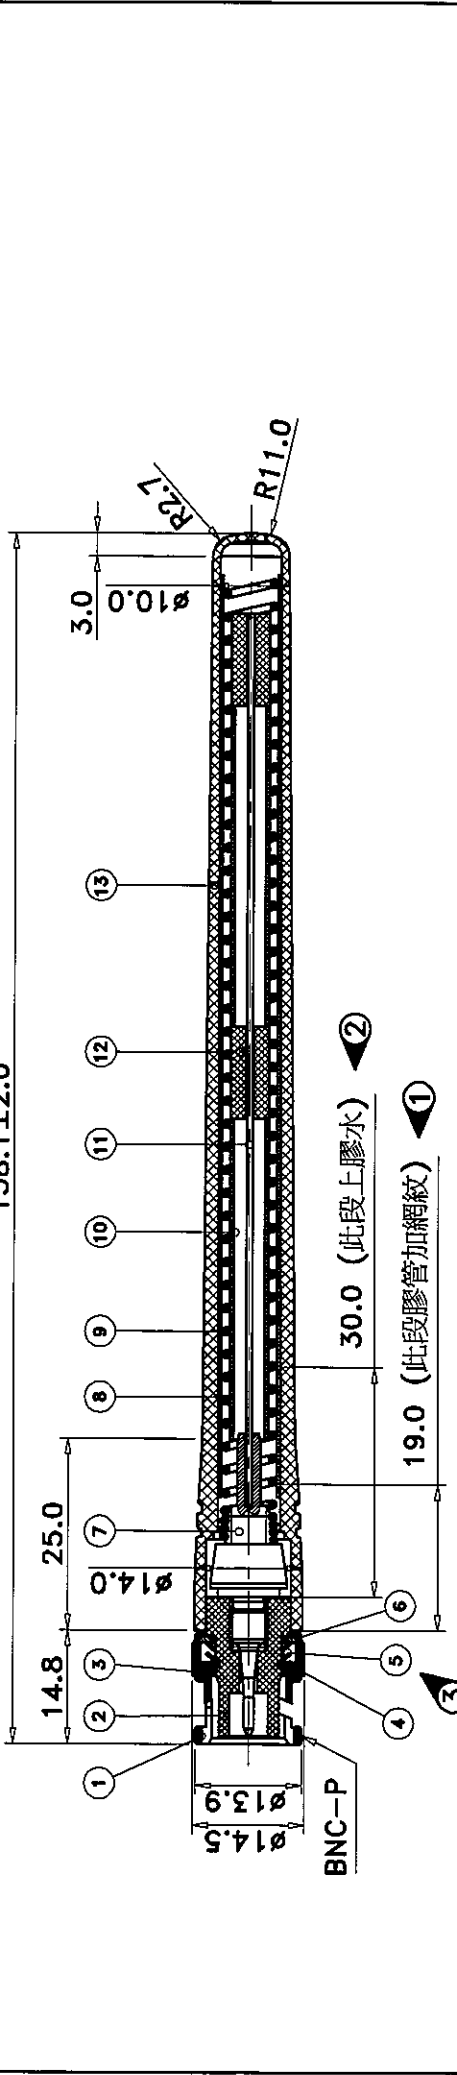

BNC-Plug Connector Interface Mating Dimensions					
13	Sleeve	TPU+UV	1	Black	RA16143002A19A
12	shock proof 3	PVC	2	Black	
11	Wire	65Mn	1	Nickel plated	RA16143002C55A
10	shock proof 2	PVC	2	Black	
9	Spring	65Mn	1	per copper plated	RA16143002C24A
8	shock proof 1	sponge	1		22.0X120.0X2.0
7	Pin	Brass	1	Nickel plated	RA16143002A51C
6	orientation band	Brass	1	Nickel plated	BNC-JDI6003A3
5	elasticity band 2	Beryllium copper	2	Nickel plated	BNC-JDI6004A3
4	elasticity band 1	phosphorous copper	1	Nickel plated	(RP)TNC-KDI003A0
3	Rubber band	Rubber	1	Red	(RP)TNC-KDI005A0
2	Dielectric	pon	1	white	BNC-JDI6001A0
1	Crust	Brass	1	Nickel plated	BNC-JDI6A2001A0
NO.	TITLE	MATERIAL	Q'TY	REMARK	DRAWING NO.
Notes:					
1. RF_Connector : BNC-Plug					

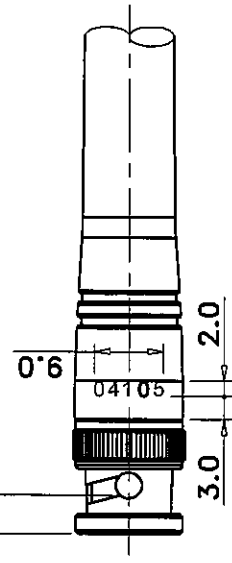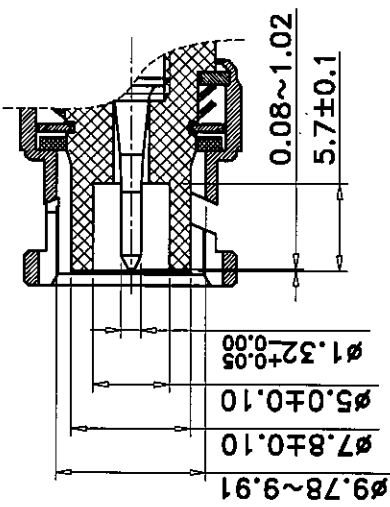

- Notes:
1. RF_Connector : BNC-Plug
 2. Sleeve Material : TPU+UV, Color is Black
 3. Working Frequenc : 150/445MHz
 - 4.Add part number of "04105" on the sleeve below
 - 5.Client Part NO: GE-04D-1050

TITLE	RUBBER ANTENNA	SCALE	1 : 1	DRAWN	溫東明	15/04/06
PART NAME	RA-16143(G96-002/F)	MATERIAL		INSPECTED		
		HANDLING		APPROVED		
		DRAWING NO.				
BONDALE ELECTRONICS LTD.						

SA0500145(1)

RA-16143(G96-002/F)

