

## TEST REPORT

**Report Number: 3136923MPK-001**

**Project Number: 3136923**

**November 15, 2007**

**Testing performed on the  
Advanced Digital Scanner**

**Model Number: 0716**

**FCC ID: ADV0716**

**to**

**FCC Part 15, Subpart B**

**Class: B**

**for**

**GRE America**



A2LA Certificate Number: 1755-01

Test Performed by:

Intertek  
1365 Adams Court  
Menlo Park, CA 94025

Test Authorized by:

GRE America  
425 Harbor Blvd. Suit B  
Belmont, CA 94002

Prepared by:

*Arkadi Kaplan*

Arkadi Kaplan

**Date:** November 15, 2007

Reviewed by:

*David Chernomordik*

David Chernomordik

**Date:** November 15, 2007

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

## VERIFICATION OF COMPLIANCE

### Report No. 3136923MPK-001

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.

<b>Equipment Under Test:</b>	Advanced Digital Scanner
<b>Trade Name:</b>	GRECOM
<b>Model No.:</b>	0716
<b>Serial No.</b>	000011
<b>Applicant:</b>	GRE America
<b>Contact:</b>	Mr. Teru Takahashi
<b>Address:</b>	425 Harbor Blvd. Suite B Belmont, CA 94002
<b>Country</b>	USA
<b>Tel. number:</b>	650-591-1400
<b>Fax number:</b>	650-591-2001
<b>Applicable Regulation:</b>	FCC Part 15, Subpart B
<b>Equipment Class:</b>	Class B
<b>Date of Test:</b>	November 05 - 06, 2007

*We attest to the accuracy of this report:*

A handwritten signature in blue ink, appearing to read "AKAS", positioned above a horizontal line.

Arkadi Kaplan  
EMC Engineer

A handwritten signature in blue ink, appearing to read "David Chernomordik", positioned above a horizontal line.

David Chernomordik  
EMC Technical Manager

## TABLE OF CONTENTS

<b>1.0</b>	<b>General Description .....</b>	<b>4</b>
1.1	Product Description .....	4
1.2	Related Submittal(s) Grants .....	4
1.3	Test Methodology .....	4
1.4	Test Facility .....	4
1.5	Summary of Test Results .....	5
<b>2.0</b>	<b>System Test Configuration.....</b>	<b>6</b>
2.1	Justification.....	6
2.2	EUT Exercising Software .....	6
2.3	Mode of Operation.....	6
2.4	Support Equipment List and Description.....	7
2.5	Equipment Setup Block Diagram .....	7
2.6	Equipment Modification .....	8
<b>3.0</b>	<b>Emission Test Results .....</b>	<b>9</b>
3.1	Field Strength Calculation .....	10
3.2	Radiated Emission Data.....	11
3.3	AC Line Conducted Emission Data.....	14
3.4	Antenna Conducted Emission Data .....	16
<b>4.0</b>	<b>List of Test Equipment .....</b>	<b>18</b>
	<b>Appendix A – Local Oscillator Frequency calculation.....</b>	<b>19</b>
	<b>Appendix B – ADV0716 Specification.....</b>	<b>21</b>

## 1.0 General Description

### 1.1 Product Description

The Equipment under Test (EUT) is Advanced Digital Scanning Receiver, model 0716.

Please refer to the attached specifications sheets in Appendix B for more details.

A pre-production version of the sample was received on November 10, 2007 in good condition. As declared by the Applicant, it is identical to production units.

### 1.2 Related Submittal(s) Grants

This is a single application for certification of a scanning receiver.

### 1.3 Test Methodology

Both conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Data Section”** of this Application.

### 1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1, a 10 meter semi-anechoic chamber. This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

## 1.5 Summary of Test Results

**Model: 0716**  
**FCC ID: ADV0716**

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Complies
Antenna Conducted Emission	15.111	Complies
FCC Part 15.121 Requirement	15.121	Complies *

\* Refer to file: ADV0716 REPORT FOR FCC RULE PART 15.121

## 2.0 System Test Configuration

### 2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4. (2003)

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

### 2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

### 2.3 Mode of Operation

The EUT was tested in two modes:


Test Mode 1: The EUT was set to constantly receive at the low, middle and high channels of each band.

Test Mode 2: The EUT was set to constantly scan all bands.

## 2.4 Support Equipment List and Description

Item #	Description	Model No.	Serial No.
1	External headphones	DS	Not Labeled

## 2.5 Equipment Setup Block Diagram

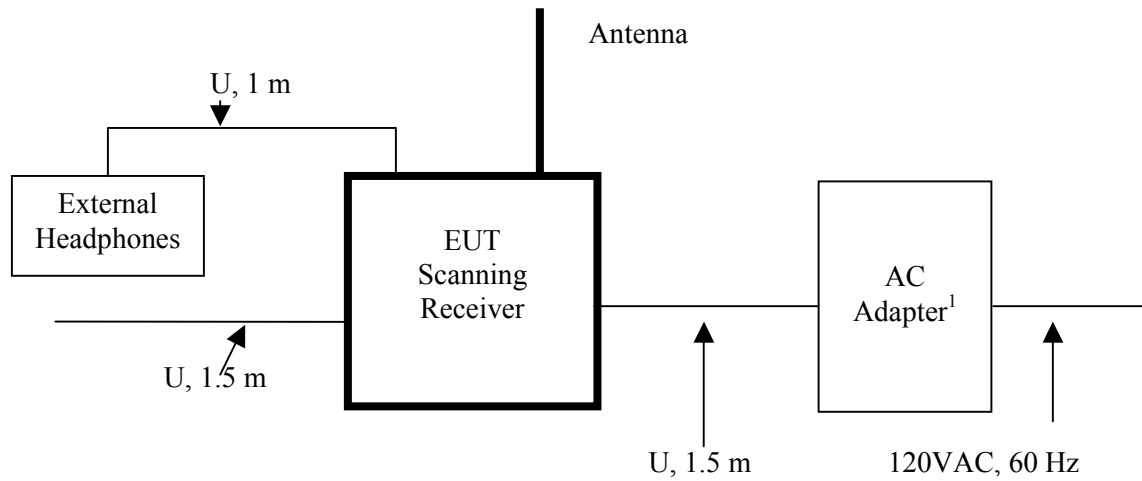

<sup>1</sup> AC adapter: GRE, AC Adapter, Model: RH48-1380600DU

U: Unshielded  
m: meter



## 2.6 Equipment Modification

Any modifications installed previous to testing by GRE will be incorporated in each production model sold/leased in the United States.

Intertek Testing Services installed no modifications.



### **3.0 Emission Test Results**

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 8000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Preliminary tests were performed to determine the worst-case emission with the EUT tuned to the low, middle and high channels of each band. From these preliminary measurements the EUT was tuned to the frequency with the highest emission and the final scan was performed using the automated test software.

The same procedure was used to determine the worst-case emission level with the EUT setup in scanning mode for each band.

The final recorded data reflects the worst-case result.

A sample calculation and data tables of the emissions are included.

All measurements were performed with peak detection unless otherwise specified.

### 3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB( $\mu$ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB( $\mu$ V/m). This value in dB( $\mu$ V/m) was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}(\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

### 3.2 Radiated Emission Data

<b>Tested By:</b>	Arkadi Kaplan
<b>Test Date:</b>	November 6, 2007

<b>Temperature</b> (°C)	20 °C
<b>Relative Humidity</b> (%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

<b>Results:</b>	<b>Complies</b> by 22.5 dB
-----------------	----------------------------

### 3.2 Test Data (Continued)

#### FCC Part 15.109 Class B Radiated Emissions Data

Model: 0716

Test Mode: Receiving at particular channel

Test distance: 3 m

Tuned Frequency	L.O. Frequency	Antenna Polarization	Corrected Reading	Limit at 3 m	Margin	RA	Amp Gain	CF +3dB Ext. att.	AF
MHz	MHz	H/V	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB(1/m)
25	405.8	V	19.7	46	-26.3	31.7	32.0	4.3	15.7
39.5	420.3	V	18.7	46	-27.3	29.9	32.0	4.3	16.5
54	434.8	V	18.4	46	-27.6	30.2	32.0	4.3	15.9
108	488.8	V	18.8	46	-27.2	29.5	32.0	4.4	16.9
122.5	503.3	V	17.3	46	-28.7	27.5	32.0	4.5	17.3
136.99	517.79	V	16.8	46	-29.2	26.5	32.0	4.5	17.8
137	517.8	V	17.2	46	-28.8	26.9	32.0	4.5	17.8
155.5	536.3	V	18.5	46	-27.5	28.2	32.0	4.5	17.8
174	554.8	V	17.7	46	-28.3	27.4	32.0	4.5	17.8
216	596.8	V	20.1	46	-25.9	29.1	32.0	4.5	18.5
224.99	605.79	V	18.8	46	-27.2	27.5	31.8	4.5	18.6
225	605.8	V	19.3	46	-26.7	28.0	31.8	4.5	18.6
368.5	749.3	V	20.9	46	-25.1	27.8	31.8	4.8	20.1
512	892.8	V	22.0	46	-24.0	27.1	31.8	5.0	21.7
764	383.2	V	19.7	46	-26.3	31.6	32.0	4.3	15.8
767	386.2	V	19.0	46	-27.0	31.0	32.0	4.3	15.7
773	392.2	V	18.0	46	-28.0	30.1	32.0	4.3	15.6
776	395.2	V	18.0	46	-28.0	30.2	32.0	4.3	15.5
794	413.2	V	20.3	46	-25.7	31.9	32.0	4.3	16.1
797	416.2	V	19.7	46	-26.3	31.1	32.0	4.3	16.3
803	422.2	V	19.8	46	-26.2	31.2	32.0	4.3	16.3
813.5	432.7	V	20.4	46	-25.6	32.2	32.0	4.3	15.9
823.9875	443.187	V	19.0	46	-27.0	30.4	32.0	4.4	16.2
849	468.2	V	16.6	46	-29.4	27.4	32.0	4.4	16.8
859	478.2	V	18.5	46	-27.5	29.1	32.0	4.4	17.0
868.9875	488.187	V	19.9	46	-26.1	30.6	32.0	4.4	16.9
894	513.2	V	18.9	46	-27.1	28.7	32.0	4.5	17.7
917	536.2	V	18.8	46	-27.2	28.5	32.0	4.5	17.8
939.9875	559.188	V	21.0	46	-25.0	30.4	31.8	4.5	17.9
940	559.2	V	21.4	46	-24.6	30.8	31.8	4.5	17.9
950	569.2	V	21.1	46	-24.9	30.4	31.8	4.5	18.0
960	579.2	V	20.5	46	-25.5	29.6	31.8	4.5	18.2
1240	859.2	V	21.4	46	-24.6	27.1	31.8	4.9	21.2
1270	889.2	V	22.0	46	-24.0	27.2	31.8	5.0	21.6
1300	919.2	V	23.5	46	-22.5	28.3	31.8	5.0	22.0



- Notes:
1. Negative signs (-) in the Margin column signify levels below the limit.
  2. All readings below 1 GHz are quasi-peak, above 1 GHz – average.
  3. All other readings not reported are at least 20 dB below the limit.
  4. For L.O. frequency calculation, see Appendix A

### 3.2 Test Data (Continued)

Model: 0716

Test Mode: Scanning all channels

Test distance: 3 m

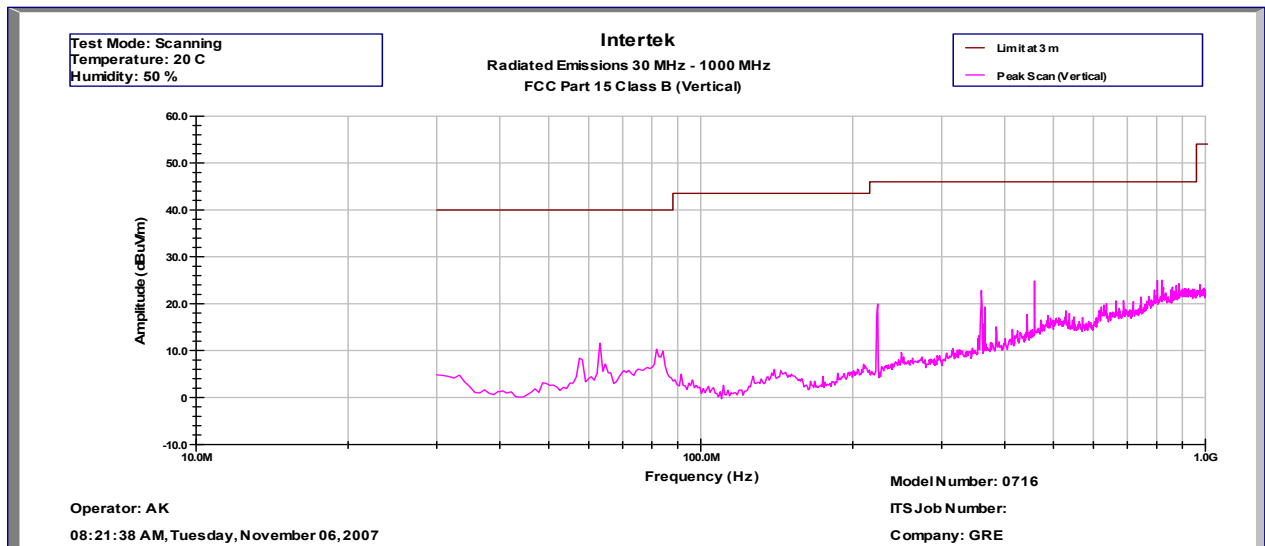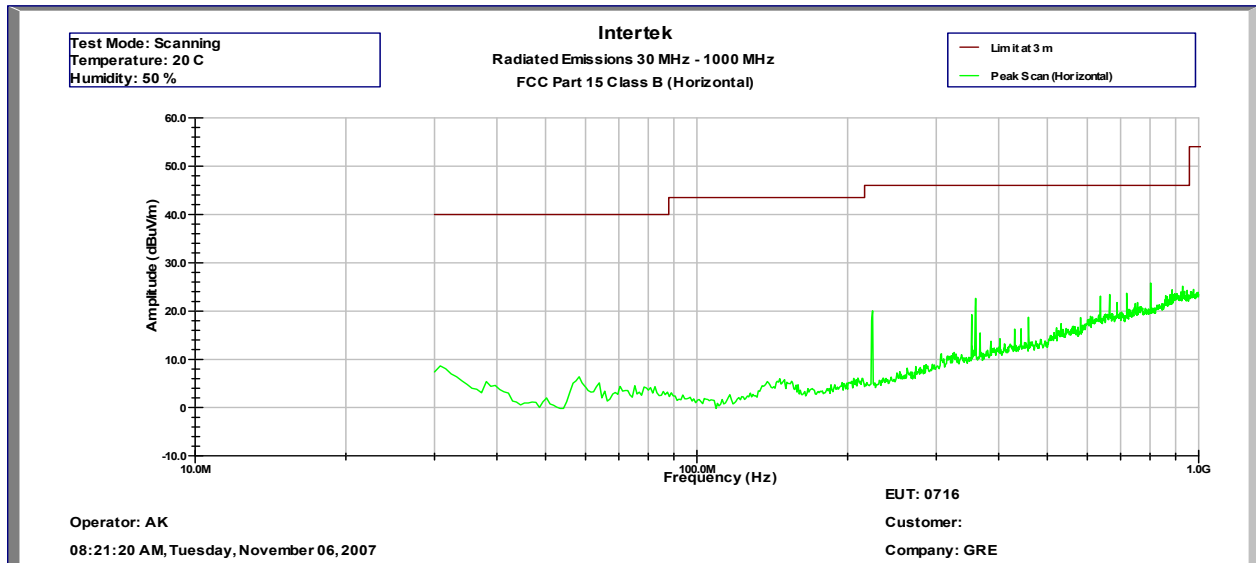

### 3.3 AC Line Conducted Emission Data



<b>Tested By:</b>	Arkadi Kaplan
<b>Test Date:</b>	November 5, 2007

<b>Temperature</b>	<b>(°C)</b>	20 °C
<b>Relative Humidity</b>	<b>(%)</b>	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

<b>Results:</b>	<b>Complies by 24.1 dB</b>
-----------------	----------------------------

### 3.3 Test Data (Continued)

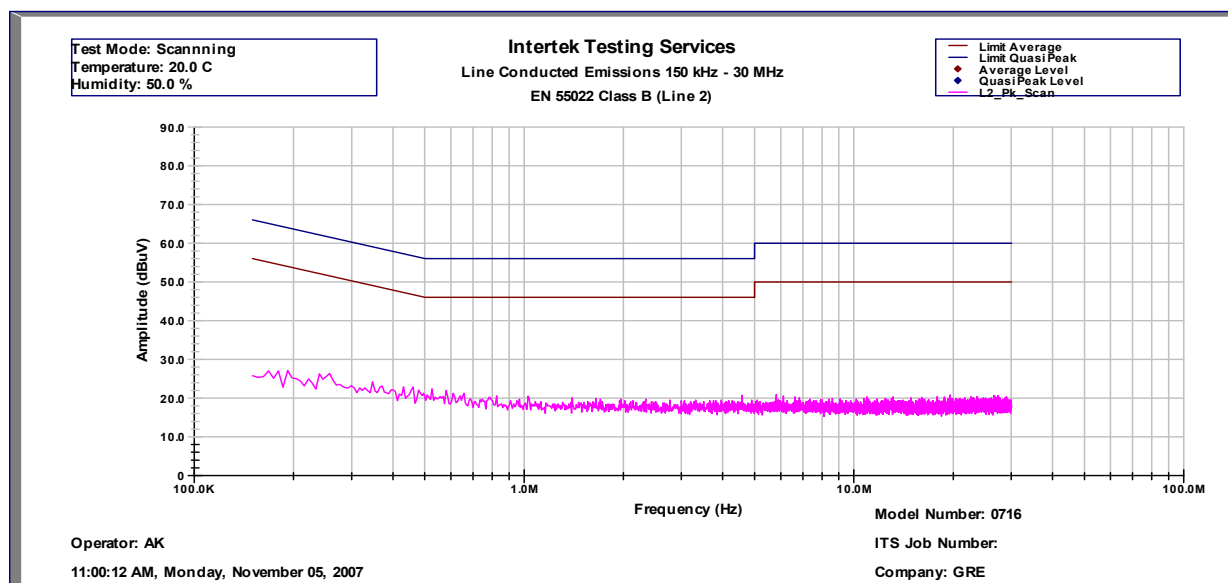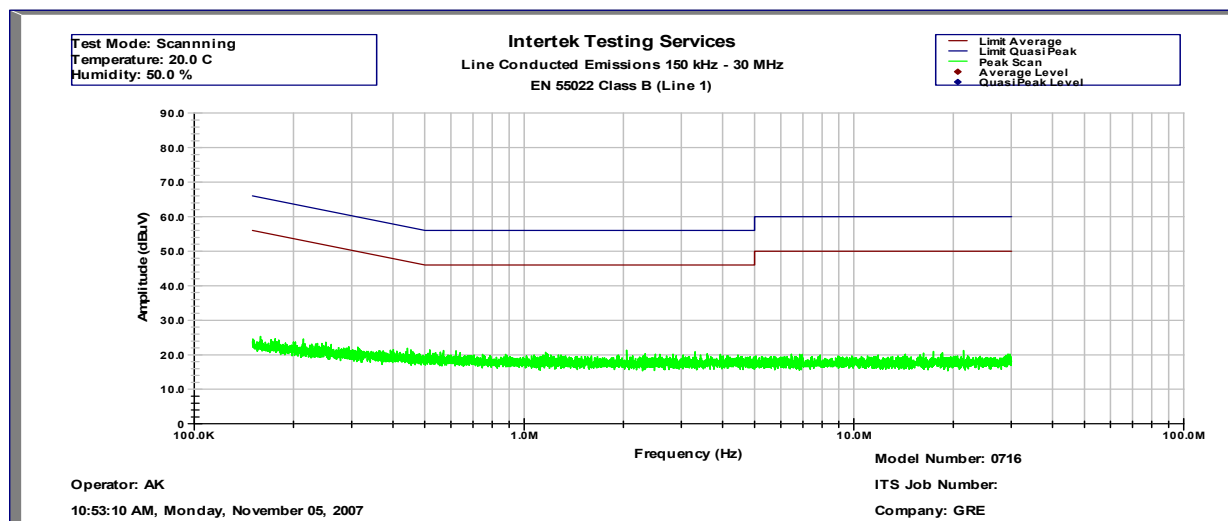

### 3.4 Antenna Conducted Emission Data



<b>Tested By:</b>	Arkadi Kaplan
<b>Test Date:</b>	November 05, 2007

<b>Temperature</b>	<b>(°C)</b>	20 °C
<b>Relative Humidity</b>	<b>(%)</b>	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

<b>Results:</b>	<b>Complies</b> by 9.0 dB
-----------------	---------------------------



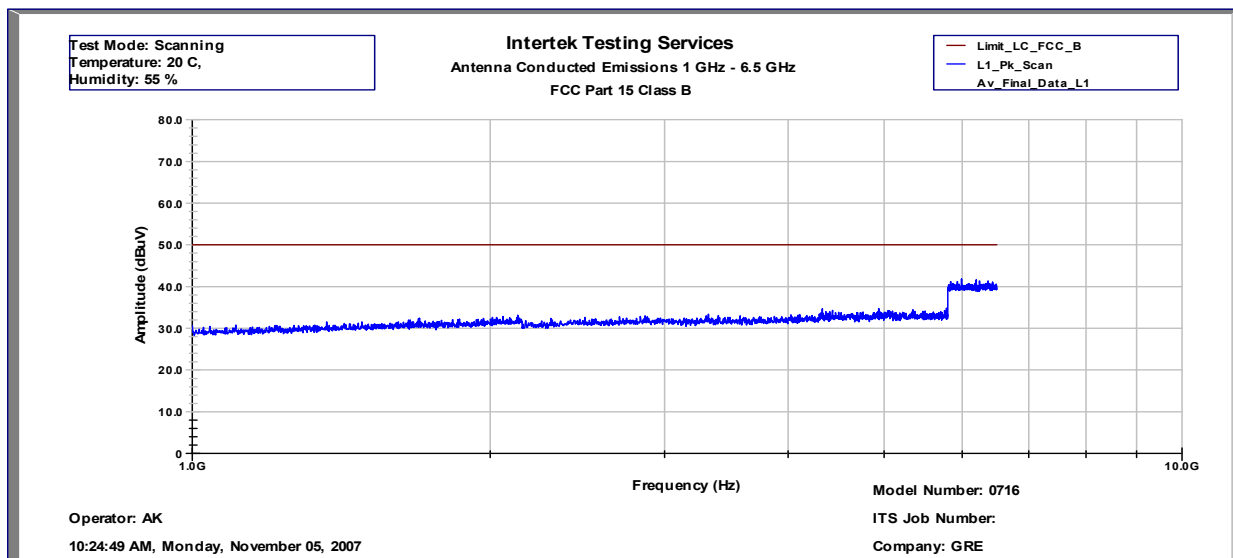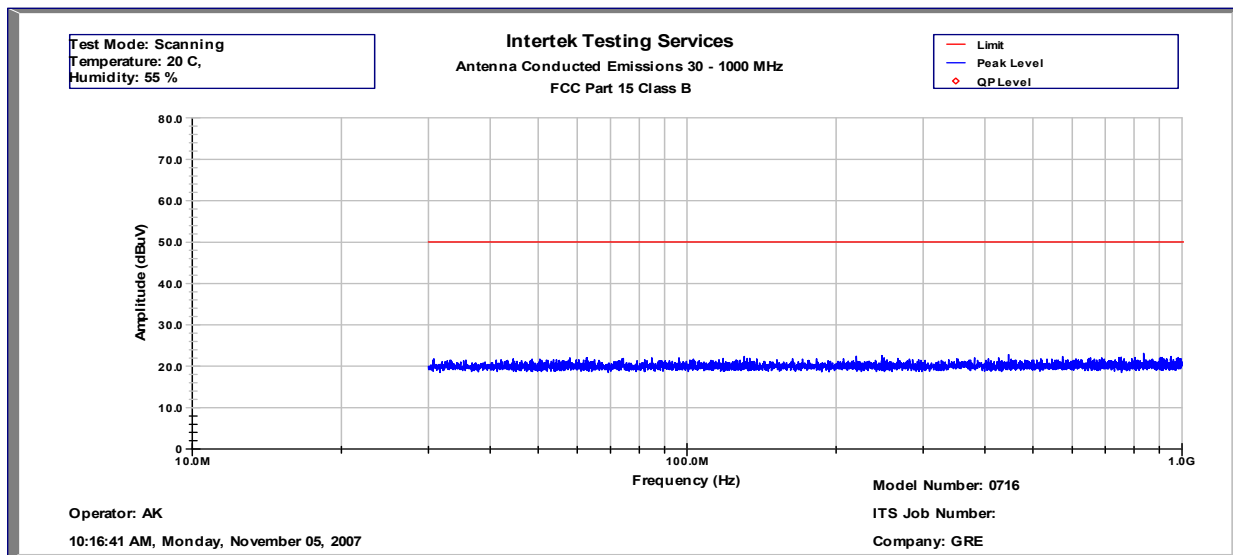

#### 4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
Spectrum Analyzer	Rhode & Schwarz	FSP-40	100030	12	8/04/08
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	10/11/08
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	10/11/08
BI-Log Antenna	EMCO	3143	9509-1160	12	9/24/08
LISN	FCC	FCC-LISN-50-50-M-H	2011	12	7/21/08
Pre-Amplifier	Sonoma	11900A	9912A05634	12	8/11/08

## **Appendix A – Local Oscillator Frequency calculation**

## 1 LOCAL OSC FREQUENCY CALCULATION

-1 MODEL NO. 0716 formula for 1st, 2nd and 3rd Local oscillation frequencies are as follow :

RECEIVING BAND (FR STEP)	FREQ. STEP ( kHz )	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	10	25.0000 ~ 27.4050	$A = (FR + 380.800) / 0.075$ $= A.xxx$ (Cut away decimal) 1st Local = $A \times 0.075$ 1st IF = 1st Local - FR	2nd Local = 1st IF - 21.4	20.9450
	5	27.4100 ~ 29.7000			
	10	29.7100 ~ 49.8300			
	5	49.8350 ~ 54.0000			
VHF High	8.33	108.0000 ~ 136.99166	FR DENOTES Frequency Received.	2nd Local = 1st IF - 21.4	20.9450
	5	137.0000 ~ 137.9950			
	12.5	138.0000 ~ 143.9875			
	5	144.0000 ~ 147.9950			
	12.5	148.0000 ~ 150.7875		2nd Local = 1st IF - 21.3975	20.9425
	5	150.8000 ~ 150.8450			
	7.5	150.8525 ~ 154.4975			
	5	154.5150 ~ 154.6400			
	7.5	154.6500 ~ 156.2550		2nd Local = 1st IF - 21.4	20.9450
	25	156.2750 ~ 157.4500			
	7.5	157.4700 ~ 161.5725			
	5	161.6000 ~ 161.9750			
	12.5	162.0000 ~ 174.0000		2nd Local = 1st IF - 21.4025	20.9475
	5	216.0025 ~ 224.9950			
UHF Low	6.25	225.0000 ~ 316.49375	$A = (FR + 380.700) / 0.075$ $A = (FR + 380.800) / 0.075$ $A = (FR + 380.700) / 0.075$ $A = (FR + 380.800) / 0.075$ $A = (FR + 380.700) / 0.075$ $A = (FR + 380.800) / 0.075$ " $A = (FR + 380.700) / 0.075$ $A = (FR + 380.800) / 0.075$ $A = (FR + 380.700) / 0.075$ $A = (FR + 380.800) / 0.075$ " " "	2nd Local = 1st IF - 21.4	20.9450
	"	316.5000 ~ 316.79375			
	"	316.8000 ~ 337.89375			
	"	337.9000 ~ 338.09375			
	"	338.1000 ~ 339.29375			
	"	339.3000 ~ 359.49375			
	"	359.5000 ~ 379.99375			
	12.5	380.0000 ~ 380.7125			
	"	380.7250 ~ 380.8000			
	"	380.8125 ~ 400.0000			
	"	400.0125 ~ 405.9750			
	"	405.9875 ~ 419.9875			
	5	420.0000 ~ 450.0000			
	6.25	450.00625 ~ 469.99375			
	12.5	470.0000 ~ 512.0000			
UHF High	3.125	764.0000 ~ 766.996875	$A = (FR - 380.800) / 0.075$ $= A.xxx$ (Cut away decimal) 1st Local = $A \times 0.075$ 1st IF = FR - 1st Local	2nd Local = 1st IF - 21.4	20.9450
	"	773.0000 ~ 775.996875			
	"	794.0000 ~ 796.996875			
	"	803.0000 ~ 805.996875			
	12.5	806.0000 ~ 823.9875			
	"	849.0000 ~ 868.9875			
	"	894.0000 ~ 939.9875			
	6.25	940.0000 ~ 960.0000			
	"	1240.0000 ~ 1300.0000			

-2 IF FREQUENCY

1st IF : 380.6500 ~ 380.86875Hz

2nd IF : 21.3975MHz/21.4000MHz/21.4025MHz

3rd IF : 455kHz

-3 Example

RECEIVING BAND (FR STEP)	FREQ. STEP ( kHz )	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	5.0	25.0000	$A : 5410.666 = (25.0000 + 380.800) / 0.075$ $= 5410.666$ (Cut away decimal) 1st Local : $405.750 = 5410 \times 0.075$ 1st IF : $380.750 = 405.750 - 25.0000$	$359.350 = 380.750 - 21.4$	20.9450
		40.0000	$5610.666 = (40.0000 + 380.800) / 0.075$ $= 5610.666$ (Cut away decimal) $420.750 = 5610 \times 0.075$ $380.750 = 420.750 - 40.0000$	$359.350 = 380.750 - 21.4$	20.9450
		54.0000	$5797.333 = (54.0000 + 380.800) / 0.075$ $= 5797.333$ (Cut away decimal) $434.775 = 5797 \times 0.075$ $380.775 = 434.775 - 54.0000$	$359.375 = 380.775 - 21.4$	20.9450
VHF High	8.33	108.0000	$6517.333 = (108.0000 + 380.800) / 0.075$ $= 6517.333$ (Cut away decimal) $488.775 = 6517 \times 0.075$ $380.775 = 488.775 - 108.0000$	$359.375 = 380.775 - 21.4$	20.9450
	7.5	154.10000	$7132 = (154.1000 + 380.800) / 0.075$ $= 7132$ (Cut away decimal) $534.9 = 7132 \times 0.075$ $380.800 = 534.900 - 154.1000$	$359.400 = 380.800 - 21.4$	20.9450
	12.5	174.0000	$7397.333 = (174.0000 + 380.800) / 0.075$ $= 7397.333$ (Cut away decimal) $554.775 = 7397 \times 0.075$ $380.775 = 554.775 - 174.0000$	$359.375 = 380.775 - 21.4$	20.9450
	5.0	216.0025	$7957.366 = (216.0025 + 380.800) / 0.075$ $= 7957.366$ (Cut away decimal) $596.775 = 7957 \times 0.075$ $380.7725 = 596.775 - 216.0025$	$359.370 = 380.7725 - 21.4025$	20.9475
	5.0	225.0000	$8077.333 = (225.0000 + 380.800) / 0.075$ $= 8077.333$ (Cut away decimal) $605.775 = 8077 \times 0.075$ $380.775 = 605.775 - 225.0000$	$359.375 = 380.775 - 21.4$	20.9450

RECEIVING BAND (FR STEP)	FREQ. STEP ( kHz )	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
UHF Low	25.0	310.0000	$9210.666 = (310.0000 + 380.800) / 0.075$ $= 9210.666$ (Cut away decimal) $690.750 = 9210 \times 0.075$ $380.750 = 690.750 - 310.0000$	$359.350 = 380.750 - 21.4$	20.9450
	6.25	406.0000	$10490.666 = (406.0000 + 380.800) / 0.075$ $= 10490.666$ (Cut away decimal) $786.750 = 10490 \times 0.075$ $380.750 = 786.750 - 406.0000$	$359.350 = 380.750 - 21.4$	20.9450
		446.0000	$11024.000 = (446.0000 + 380.800) / 0.075$ $= 11024.000$ (Cut away decimal) $826.800 = 11024 \times 0.075$ $380.800 = 826.800 - 446.0000$	$359.400 = 380.800 - 21.4$	20.9450
		512.0000	$11904.000 = (512.0000 + 380.800) / 0.075$ $= 11904.000$ (Cut away decimal) $892.800 = 11904 \times 0.075$ $380.800 = 892.800 - 512.0000$	$359.400 = 380.800 - 21.4$	20.9450
UHF High	3.125	764.0000	$5109.333 = (764.0000 - 380.800) / 0.075$ $= 5109.333$ (Cut away decimal) $383.175 = 5109 \times 0.075$ $380.825 = 764.000 - 383.175$	$359.425 = 380.825 - 21.4$	20.9450
	6.25	806.0000	$5669.333 = (806.0000 - 380.800) / 0.075$ $= 5669.333$ (Cut away decimal) $425.175 = 5669 \times 0.075$ $380.825 = 806.000 - 425.175$	$359.425 = 380.825 - 21.4$	20.9450
		860.0000	$6389.333 = (860.0000 - 380.800) / 0.075$ $= 6389.333$ (Cut away decimal) $479.175 = 6389 \times 0.075$ $380.825 = 860.000 - 479.175$	$359.425 = 380.825 - 21.4$	20.9450
		960.0000	$7722.666 = (960.0000 - 380.800) / 0.075$ $= 7722.666$ (Cut away decimal) $579.150 = 7722 \times 0.075$ $380.850 = 960.000 - 579.150$	$359.450 = 380.850 - 21.4$	20.9450
		12400.0000	$11456.000 = (12400.000 - 380.800) / 0.075$ $= 11456.000$ (Cut away decimal) $859.200 = 11456 \times 0.075$ $380.800 = 12400.000 - 859.200$	$359.400 = 380.800 - 21.4$	20.9450
		1300.0000	$12256.000 = (1300.0000 - 380.800) / 0.075$ $= 12256.000$ (Cut away decimal) $919.200 = 12256 \times 0.075$ $380.800 = 1300.000 - 919.200$	$359.400 = 380.800 - 21.4$	20.9450

**Appendix B – ADV0716 Specification**



## GENERAL RESEARCH OF ELECTRONICS, INC.

Phone: +813-5439-3611

Fax: +813-5439-3644

SHIBA NO.3 AMEREX BLDG.  
No. 12-17 MITA 3-CHOME, MINATO-KU  
TOKYO 108-0073, JAPAN

Date: Oct. 16, 2007  
Reference No. F07009

### SPECIFICATIONS

SUBJECT: DIGITAL AND ANALOGUE TRIPLE TRUNKING SYSTEM,  
VHF/UHF PROGRAMMABLE AM/FM SCANNING RECEIVER  
WITH SPECTRUM SWEEPER AND SKYWARN, MODEL : 0716

#### 1. GENERAL SPECIFICATIONS

- |     |                         |   |
|-----|-------------------------|---|
| 1.1 | Working Memory:         | 1,800 programmed objects using flexible "scannable object" system. Program and scan conventional channels, trunking talkgroups, limit searches, service searches, and Spectrum Sweeper configurations as "scannable objects" that are created, edited, grouped and scanned using common user interface conventions. |
| 1.2 | Virtual Scanners:       | 21 Virtual Scanner (V-Scanner) folders, each capable of holding the entire contents of working memory, for a total storage capacity of over 37,800 objects.   |
| 1.3 | Searches                | 8 preprogrammed dedicated service searches, 1 dedicated limit search. Any service or limit search can be programmed and scanned as an object alongside conventional channels and trunking talkgroups  |
| 1.4 | Priority                | Talkgroup and conventional channel priority, selectable priority sample rate and priority sample during trunking talkgroup call   |
| 1.5 | Conv. Receive Modes     | AM, FM, NFM, CTCSS, DCS, P25 NAC  |
| 1.6 | Trunking Receiver Modes | Motorola Type I/II/III Analog and Digital, GE/Ericsson/MA-COM EDACS Narrowband, and Wideband, EF Johnson LTR  |

– Continued –

**PRODUCT DEVELOPMENT & MANUFACTURING**



- |              |   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|--------------|---|--|---------|-------------------------|--------------|---------------------------|----------|---------------------------|--|---------------------------|-----------|---------------------------|----------|----------------------------|--|-----------------------------|
| 1.7          | Receiver Design   | Triple conversion PLL super-heterodyne   |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|              |   | 1st IF 380.8 MHz : The 1st LO uses high side of receive frequency range for VHF and UHF Low/T, and low side of receive frequency range for >512 MHz  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|              |   | 2nd IF 21.4 MHz : The second LO uses low side of 1st IF  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|              |   | 3rd IF 455 kHz : The 3rd LO uses the low side of the 2nd IF  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.8          | Frequency Range   | <table border="0"> <tr> <td>VHF Low</td> <td>25.00000 - 54.00000 MHz</td> </tr> <tr> <td>VHF Aircraft</td> <td>108.00000 - 136.99166 MHz</td> </tr> <tr> <td>VHF High</td> <td>137.00000 - 174.00000 MHz</td> </tr> <tr> <td></td> <td>216.00250 - 299.93750 MHz</td> </tr> <tr> <td>UHF Low/T</td> <td>300.00000 - 512.00000 MHz</td> </tr> <tr> <td>UHF High</td> <td>764.00000 - 960.00000 MHz*</td> </tr> <tr> <td></td> <td>1240.00000 - 1300.00000 MHz</td> </tr> </table> | VHF Low | 25.00000 - 54.00000 MHz | VHF Aircraft | 108.00000 - 136.99166 MHz | VHF High | 137.00000 - 174.00000 MHz |  | 216.00250 - 299.93750 MHz | UHF Low/T | 300.00000 - 512.00000 MHz | UHF High | 764.00000 - 960.00000 MHz* |  | 1240.00000 - 1300.00000 MHz |
| VHF Low      | 25.00000 - 54.00000 MHz   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| VHF Aircraft | 108.00000 - 136.99166 MHz   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| VHF High     | 137.00000 - 174.00000 MHz   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|              | 216.00250 - 299.93750 MHz   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| UHF Low/T    | 300.00000 - 512.00000 MHz   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| UHF High     | 764.00000 - 960.00000 MHz*  |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|              | 1240.00000 - 1300.00000 MHz   |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
|              | *Excludes frequencies utilized by the Cellular Mobile Radiotelephone Service<br>824 – 848.9875 MHz and 869 – 893.9875 MHz |  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.9          | Service Searches  | Marine<br>Aircraft<br>CB<br>FRS/GMRS/MURS/DOT-STAR<br>Public Safety<br>Aircraft<br>Amateur Radio<br>Railroad   |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.10         | Weather Frequencies   | 162.400, 162.425, 162.450, 162.475, 162.500, 162.525, 162.550 MHz  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.11         | Scanning Rate   | Approximately 55 channels per second   |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.12         | Search Rate   | Approximately 90 steps per second  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.13         | Display   | LCD with amber LED backlight, 4 lines of 16 characters each, plus 13 display icons   |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.14         | Zeromatic   | Automatically zeroes receiver on correct frequency during searches   |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |
| 1.15         | Audio Output  | 1.8 Watts  |         |                         |              |                           |          |                           |  |                           |           |                           |          |                            |  |                             |

## 1.16 Spectrum Sweeper

## All Bands:

Group 0 :25 – 54 MHz  
 Group 1 :108 – 136.99166 MHz  
 Group 2 :137 – 174 MHz  
 Group 3 :216.0025 – 299.9750 MHz  
 Group 4 :300 – 405.9875 MHz  
 Group 5 :406 – 470 MHz  
 Group 6 :470.0125 – 512 MHz  
 Group 7 :764.00375 -766.996875 MHz  
           773.00375 -775.998675 MHz  
           794.00375 -796.996875 MHz  
           803.00375 – 805.996875 MHz  
 Group 8 :806 – 868.9875 MHz\*  
 Group 9 :896 – 960, 1240 – 1300 MHz

## Public Safety Bands:

Group 0 :33.4-46.5 MHz  
 Group 1 :151 – 170 MHz  
 Group 2 :453 – 467 MHz  
 Group 3 :764.00375 -766.996875 MHz  
           773.00375 -775.998675 MHz  
           794.00375 -796.996875 MHz  
           803.00375 – 805.996875 MHz  
 Group 4 :806-869 MHz\*

\*Excludes frequencies utilized by the Cellular Mobile Radiotelephone Service  
 824 – 848.9875 MHz and 869 – 893.9875 MHz

## 1.17 Speaker

Built-in 77 mm 8 Ohms dynamic speaker

## 1.18 Operating Voltage

DC 13.8 Volts

## 1.19 Dimensions

Approx. 185 (W) x 135 (D) x 55 (H) mm

## 1.20 Weight

Approx. 790 g without antenna

## 1.21 Included accessories

Telescopic antenna, Handle bracket, UL listed AC-DC adapter,  
 USB Interface cable, Other cabinet and Owner's manual

## 1.22 Memory backup

No backup battery required, utilizes non-volatile EEPROM  
 memory

**2. ELECTRICAL SPECIFICATIONS**

## Standard Test Condition

- |                           |   |               |
|---------------------------|---|---------------|
| (1) Power source voltage  | : | 13.8 Volts DC |
| (2) Antenna impedance     | : | 50 Ohms       |
| (3) Test temperature      | : | 25 degrees C  |
| (4) Standard signal level | : | 100 $\mu$ V   |

- (5) Modulation frequency : 1 kHz
- (6) Reference FM deviation : 3.0 kHz
- (7) Reference AM modulation : 60%
- (8) Reference audio output : 75m Watts
- (9) Audio output load : 8 Ohm resistive load


## 2.1 FREQUENCY RANGES:

Frequency Range	Step Size	Default Mode
25.00000 - 26.96000 MHz	10 kHz	AM
26.96500 - 27.40500 MHz	10 kHz	AM
27.41000 - 29.50500 MHz	5 kHz	AM
29.51000 - 29.70000 MHz	5 kHz	FM
29.71000 - 49.83000 MHz	10 kHz	FM
49.83500 - 54.00000 MHz	5 kHz	FM
108.00000 - 136.99166 MHz	8.33 kHz	AM
137.00000 - 137.99500 MHz	5 kHz	FM
138.00000 - 143.98750 MHz	12.5 kHz	FM
144.00000 - 147.99500 MHz	5 kHz	FM
148.00000 - 150.78750 MHz	12.5 kHz	FM
150.80000 - 150.84500 MHz	5 kHz	FM
150.85250 - 154.49750 MHz	7.5 kHz	FM
154.51500 - 154.6400 MHz	5 kHz	FM
154.65000 - 156.2550 MHz	7.5 kHz	FM
156.27500 - 157.4500 MHz	25 kHz	FM
157.47000 - 161.5725 MHz	7.5 kHz	FM
161.60000 - 161.9750 MHz	5 kHz	FM
162.00000 - 174.0000 MHz	12.5 kHz	FM
216.00250 - 219.9975 MHz	5 kHz	FM
220.00000 - 224.9950 MHz	5 kHz	FM
225.00000 - 379.99375 MHz	6.25 kHz	AM
380.00000 - 419.98750 MHz	12.5 kHz	FM
420.00000 - 450.00000 MHz	5 kHz	FM
450.00625 - 469.99375 MHz	6.25 kHz	FM
470.00000 - 512.00000 MHz	12.5 kHz	FM
764.00000 - 766.996875 MHz	3.125 kHz	FM
773.00000 - 775.996875 MHz	3.125 kHz	FM
794.00000 - 796.996875 MHz	3.125 kHz	FM
803.00000 - 805.996875 MHz	3.125 kHz	FM
806.00000 - 823.987500 MHz	12.5 kHz	FM
849.00000 - 868.98750 MHz	12.5 kHz	FM
894.00000 - 901.98750 MHz	12.5 kHz	FM
902.00000 - 928.00000 MHz	12.5 kHz	FM
928.01250 - 939.98750 MHz	12.5 kHz	FM
940.00000 - 960.00000 MHz	6.25 kHz	FM
1240.00000 - 1300.0000 MHz	6.25 kHz	FM

\*Excludes frequencies utilized by the Cellular Mobile Radiotelephone Service:  
824 – 848.9875 MHz and 869 – 893.9875 MHz

			Nominal	Limit
2.2	Sensitivity	: VHF Low	0.3 $\mu$ V	1 $\mu$ V
	FM: (S+N)/N = 20 dB	VHF Aircraft	0.3 $\mu$ V	1 $\mu$ V
	Dev.: 3 kHz at 1 kHz	VHF High 138 - 174 MHz	0.5 $\mu$ V	2 $\mu$ V
		216.0025 - 224.975 MHz	0.5 $\mu$ V	2 $\mu$ V
		225 - 299.99375 MHz	0.5 $\mu$ V	2 $\mu$ V
		UHF Low/T 300 - 405.975 MHz	0.8 $\mu$ V	3 $\mu$ V
		406 - 512 MHz	0.5 $\mu$ V	2 $\mu$ V
		UHF High 764 - 960 MHz	0.7 $\mu$ V	3 $\mu$ V
		1240 - 1300 MHz	0.7 $\mu$ V	4 $\mu$ V
	AM: (S+N)/N = 20 dB	: VHF Low	1 $\mu$ V	3 $\mu$ V
	Mod.: 60% at 1 kHz	VHF Aircraft	1 $\mu$ V	3 $\mu$ V
		VHF High 138 - 174 MHz	1.5 $\mu$ V	5 $\mu$ V
		216.0025 - 299.975 MHz	1.5 $\mu$ V	5 $\mu$ V
		225 - 299.99375 MHz	2 $\mu$ V	6 $\mu$ V
		UHF Low/T 300 - 405.975 MHz	3 $\mu$ V	10 $\mu$ V
		406 - 512 MHz	2 $\mu$ V	6 $\mu$ V
		UHF High 764 - 960 MHz	2 $\mu$ V	6 $\mu$ V
		1240 - 1300 MHz	3 $\mu$ V	12 $\mu$ V
2.3	Spectrum sweeper sensitivity	: 450 MHz	-60 dBm	-50 dBm
2.4	Data decode sensitivity			
	ED	: ED (GE/Ericsson/MA-COM)	1 $\mu$ V	4 $\mu$ V
	4 kHz Dev. at 450, 860 MHz			
	MO (Voice channel)	: MO (Motorola)	0.5 $\mu$ V	2 $\mu$ V
	350 Hz Dev. at 174, 450, 860 MHz			
	MO (Control channel)	: MO (Motorola)	0.8 $\mu$ V	4 $\mu$ V
	4 kHz Dev. at 174, 450, 860 MHz			
	LTR	: LTR (EF Johnson)	0.5 $\mu$ V	3 $\mu$ V
	800 Hz Dev. at 450, 860 MHz			
	WX Alert 1050 Hz tone	:	0.3 $\mu$ V	1 $\mu$ V
	3 kHz Dev. at 162.4 MHz			
	WX Digital Weather Alert	:	0.5 $\mu$ V	2 $\mu$ V
	4 kHz Dev. at 162.4 MHz			
			Nominal	Limit
2.5	CTCSS decode sensitivity	:	0.5 $\mu$ V	3 $\mu$ V
	350 Hz Dev. at 450, 860 MHz			
2.6	DCS decode sensitivity	:	0.5 $\mu$ V	3 $\mu$ V
	350 Hz Dev. at 450, 860 MHz			

2.7	WX alert tone decode range :	1050 $\pm$ 25 Hz	$\pm$ 40 Hz
	4 kHz Dev. 2 $\mu$ V at 162.400 MHz		
2.8	WX alert tone checking time :	6 sec.	4 - 8 sec.
	4 kHz Dev. 2 $\mu$ V at 162.400 MHz		
2.9	WX alert sound level at 1 ft. :	80 dB SPL	70 dB SPL
2.10	Image ratio 1 <sup>st</sup> IF image :		
	VHF Low at 41 MHz	50 dB	40 dB
	VHF Aircraft at 124 MHz	50 dB	40 dB
	VHF High at 154.1 MHz	50 dB	40 dB
	Military Air at 310 MHz	40 dB	25 dB
	UHF Low/T at 450 MHz	50 dB	40 dB
	UHF High at 860 MHz	80 dB	60 dB
	1270 MHz	55 dB	40 dB
	2 <sup>nd</sup> IF image :		
	VHF High at 154.1 MHz	45 dB	35 dB
2.11	Attenuator :		
	VHF Low at 41 MHz	20 dB	17 - 24 dB
	VHF Aircraft at 124 MHz	20 dB	17 - 24 dB
	VHF High at 154.1 MHz	20 dB	17 - 24 dB
	UHF Low/T at 450 MHz	17 dB	10 - 20 dB
	UHF High at 860 MHz	15 dB	8 - 20 dB
	at 1270 MHz	13 dB	8 - 18 dB
2.12	Squelch sensitivity (Band center)		
	Threshold :	0.5 $\mu$ V	2 $\mu$ V
	Tight: (S+N)/N :	20 dB	10 dB
	FM	25 dB	15 dB
2.13	Selectivity		
	AM 25 - 27.995 MHz :		
	-6 dB	$\pm$ 4 kHz	$>\pm$ 2.5 kHz
	-50 dB	$\pm$ 6 kHz	$<\pm$ 12 kHz
	Other frequency :		
	-6 dB	$\pm$ 7 kHz	$>\pm$ 4.5 kHz
	-50 dB	$\pm$ 13 kHz	$<\pm$ 18 kHz
2.14	Spurious rejection :		
	(Except Primary image)		
	VHF High at 154.1 MHz	40 dB	30 dB
		<b>Nominal</b>	<b>Limit</b>
2.15	IF rejection ratio :		
	380.8 MHz at 154.1 MHz	60 dB	40 dB
	21.4 MHz at 154.1 MHz	100 dB	80 dB
	Fr : 225 - 300 MHz	30 dB	not specified
	300 - 405.975 MHz	10 dB	not specified

2.16	Acceptable radio frequency displacement at EIA RS-204D		$\pm 6$ kHz	$\pm 3$ kHz
2.17	Signal meter indicating	Full level (  ) at 154.1 MHz	-96 dBm	-94 dBm - -98 dBm
2.18	Signal to noise ratio	VHF Low	40 dB	30 dB
	AM/FM	VHF Aircraft	40 dB	30 dB
	RF: 100 $\mu$ V	VHF High 138 -174 MHz	40 dB	30 dB
	Dev.: 3 kHz at 1 kHz	216.0025 – 299.975 MHz	40 dB	30 dB
	Mod. 60% at 1 kHz	UHF Low/T 300 - 512 MHz	35 dB	25 dB
		UHF High 764 – 960 MHz	35 dB	25 dB
		1240 – 1300 MHz	35 dB	25 dB
2.19	Residual noise Vol. min. and Squelched		2 mV	5 mV
2.20	Scanning rate without trunking:	138 – 147.9 MHz (in 100kHz: Intervals)	55 ch/sec.	45 – 66 ch/sec.
2.21	Search rate steps/sec.	at 447.500 – 453.125 MHz	90 steps/sec.	80 – 100
2.22	Spectrum Sweeper Time	Public safety band	<0.75 sec.	0.825 sec.
	One active signal present	All bands, default groups	<2.0 sec.	2.50 sec.
	above threshold	All bands, all groups	<6.0 sec.	6.5 sec.
2.23	Scan and Search delay time	User programmable, default	2 sec.	1- 3 sec
2.24	Audio output (T.H.D. 10 %)	RF input: 100 $\mu$ V at 154.1 MHz 8 Ohms R Load, 1 kHz	1.5 Watts	1.0 Watts
2.25	T.H.D. at 50 m Watt	RF input: 100 $\mu$ V at 154.1 MHz	1 %	5%
2.26	Audio max. power	RF input: 100 $\mu$ V at 154.1 MHz		
	8 Ohm internal speaker		1.8 Watts	1.3 Watts
	32 Ohm at headphone mono/stereo (each phone)		19/14 mWatts	<28 mWatts
			<b>Nominal</b>	<b>Limit</b>
2.27	Audio frequency response at	RF input: 100 $\mu$ V at 154.1 MHz	300 Hz	200 – 400 Hz
	-6 dB		2.0 kHz	1.5 – 3.0 kHz
2.28	Intermediate frequency	1 <sup>st</sup> 380.8 MHz 2 <sup>nd</sup> 21.4 MHz 3 <sup>rd</sup> 455 kHz		

2.29	Current drain at 13.8 Volts 8 Ohm internal speaker at 154.1 MH	: Vol. Max. Squelched	450 mA 200 mA	550 mA 250 mA
2.30	Current drain AC adapter GA-04D-1100A 8 Ohm internal speaker at 154.1 MHz	: Vol. Max. Squelched	90 mA AC 50 mA AC	120 mA AC 60 mA AC
2.31	Birdies and step frequency when search	:	Not specified	
2.32	Filter	:	Saw filter for 380.8 MHz, Monolithic crystal filter for 21.4 MHz and ceramic filter for 455 kHz	
2.33	Antenna impedance	:	50 Ohms	
2.34	Temperature range	:	Test to specification between: +18°C - +35 degree C  Operate (Need not meet spec.: -20 °C - +60 degree C	

### 3. OPERATING CONTROLS AND CONNECTIONS

- 3.1 Volume control with power switch
- 3.2 Squelch control
- 3.3 Keyboard (34 keys): FUNCTION 1-3, Five Way Pushbutton Key (up, down, left, right, SEL), FUNCTION, DIM, MANUAL, SCAN/spectrum Sweeper, TUNE, SEARCH, ATT, PRIORITY, FAV, WX/Skywarn, PGM/V-S, L/OUT ENTER, Pause, 1, ABC/2, DEF/3, GHI/4, JKL/5, MNO/6, PQRS/7, TUV/8, WXYZ/9, CL, 0 and • /DELAY
- 3.4 LCD display: 16 characters x 4 lines and 8 icons  
Frequency, Mode, CH Bank, Text, Squelch, Signal meter, Battery low, up/down ...  
F, T, G, A, S, ▲, ▼, ■■■■ ..... icons
- 3.5 BNC type antenna connector
- 3.6 Earphone jack (D = 3.5 mm stereo)
- 3.7 External power jack
- 3.8 External speaker jack
- 3.9 PC/IF Interface jack (D = 3.5 mm stereo)

#### 4. Major Features:

- 4.1 **Upgradeable CPU and DSP Firmware** – your customers can easily keep their radios current with software enhancements as they become available with free upgrades from [www.greamerica.com](http://www.greamerica.com)!
- 4.2 **Intuitive "Object Oriented" User Interface Design** is designed for ease of use, yet powerful enough to satisfy the most sophisticated experts. Common data entry, browsing and control methods are used for non-trunked conventional channels, trunking talkgroups, search configurations and Spectrum Sweeper setups. The radio grows with your customers – they can start out with a small, easy to manage configuration, then expand it whenever your customers need to.
- 4.3 **Menu Driven Programming With Context Sensitive Help** - Each menu item provides a few lines of help text that provide assistance with programming and using the scanner.
- 4.4 Powerful and Flexible Scan List Functionality allows your customers to arrange, group and scan objects according to their preference.
- 4.5 **Flexible Free-Form Memory Organization** - memory is assigned as objects are created using a sophisticated internal file management system. Your customers are not constrained to traditional bank/channel scanner memory layouts. No memory is wasted as a result of bank/channel programming constraints. The scanner has sufficient main memory capacity to store over 1,800 conventional channels, trunking talkgroups, search configurations and Spectrum Sweeper objects in any combination, providing ample capacity for more sophisticated hobbyists and professionals while keeping the database size manageable for beginners.
- 4.6 **GRE's Exclusive V-Scanner Technology** - Allows your customers to save complete radio configurations within the radio, for recall into main memory as needed in the field. This is similar to having a laptop computer and programming software available anytime. Your customers can use V-Scanners to store configurations for different geographical areas or usage styles. Twenty-one V-Scanner Folders are provided, each capable of storing over 1,800 objects. Total memory capacity of main memory combined with V-Scanners is over 37,800 objects!
- 4.7 **SKYWARN Storm Spotter Functionality** – Provides instant, one button access to frequencies used by storm spotter networks. Your customers can monitor storm conditions as they occur, and become aware of dangerous conditions before the media or emergency management officials are able to announce them to the general public.
- 4.8 **SAME and All Hazards Weather Alerting** – PSR-600 Advanced Digital Scanner can operate in dedicated SAME weather alerting mode, and alert your customers to severe weather and other hazards in the specific area(s) that they select, or, the scanner can check local NOAA weather frequencies periodically, even while scanning, and alert your customers when an All Hazards alert occurs.



- 4.9 **Multi-System Trunking** - Scans most common trunked radio system signaling formats, including Motorola, EDACS, LTR and P25 trunked radio networks. Talkgroup and individual call monitoring is supported.
- 4.10 **GRE's Exclusive Automatic Adaptive Digital Tracking** - When monitoring Motorola and P25 digital systems, instantly adapts the digital decoder to the digital modulation format of the transmitted signal, then analyzes the signal hundreds of times each second and adapts to any subtle changes caused by multipath or fading. No cumbersome manual adjustments are required.
- 4.11 **GRE's Exclusive Digital AGC** - instantly compensates for low user audio levels that are very common on digital systems. The radio is easier to listen to, and provides your customers with a more enjoyable scanning experience.
- 4.12 **The Best Subaudible Squelch Decoder in the Scanning Industry** - CTCSS and DCS subaudible squelch coding is processed by the same powerful DSP chip that is used for P25 digital decoding. Provides fast and reliable decoding of subaudible squelch signaling with squelch tail elimination.
- 4.13 **Powerful Spectrum Sweeper** - Quickly sweeps the scanner's frequency ranges for transmissions from nearby transmitters.
- 4.14 **P25 NAC Functionality** - Much like CTCSS and DCS with analog signals, P25 Network Access Code (NAC) is used to provide selective squelch operation on conventional digital channels. GRE's #0501 Advanced Digital Scanner will detect the NAC that is being used on a P25 conventional digital channel, and allow your customers to program NAC codes to block transmissions that do not have a matching NAC, including analog traffic on the same frequency!
- 4.15 **Exclusive ALERT LED** - Programmable tri-color LED can be configured to illuminate or flash when certain objects are active. Eight user-defined colors and brightness levels can be specified from thousands of possible combinations. Provides visual alerts when certain channels are active, e.g., blue can be used to signal activity on a primary police channel, red for fire, etc.
- 4.16 **Audible alarms** - Programmable audible alarms can be configured to sound when certain objects are active. Can be used in conjunction with, or separately from, the ALERT LED described above.
- 4.17 **High Speed PC Interface** - uses USB cable (GA-07D-1920) in full duplex mode at 6 times the speed of previous scanner models for PC transfer and 8 times the speed of previous models for radio-to-radio cloning.
- 4.18 **Real-time Signal Strength Indicator** - shows relative strength of received signals.
- 4.19 **Sleek, Compact Case Design with Large Speaker** is designed for one-handed operation and ease of use.