

TEST REPORT

Report Number: 30740191

Project Number: 3074019

March 25, 2005

**Testing performed on the
Multi Trunk-Tracking Handheld Scanner**

Model Number: PRO-2055

FCC ID: ADV2000428

to

FCC Part 15, Subpart B

ICES 003

Class: B

For

General Research of Electronics, Inc.



A2LA Certificate Number: 1755-01

Test Performed by:

Intertek

1365 Adams Court

Menlo Park, CA 94025

Prepared by:

A handwritten signature in blue ink, appearing to read 'Bruce Gordon', written over a horizontal line.

Bruce Gordon

Test Authorized by:

General Research of Electronics, Inc.

425 Harbor Blvd. Suit B

Belmont, CA 94002

Date: March 25, 2005

Reviewed by:

A handwritten signature in blue ink, appearing to read 'Ollie Moyrong', written over a horizontal line.

Ollie Moyrong

Date: March 25, 2005


This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

VERIFICATION OF COMPLIANCE
Report No. 30740191

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.


Equipment Under Test:	Multi Trunk-Tracking Scanner
Trade Name:	General Research of Electronics, Inc.
Model No.:	PRO-2055
Applicant:	General Research of Electronics, Inc.
Contact:	Mr. Teru Takahashi
Address:	425 Harbor Blvd. Suite B Belmont, CA 94002
Country	USA
Tel. number:	650-591-1400
Fax number:	650-591-2001
Applicable Regulation:	FCC Part 15, Subpart B Industry Canada ICES-003
Equipment Class:	Class B
Date of Test:	March 19, 2005

We attest to the accuracy of this report:



Bruce Gordon
Test Engineer

Date:

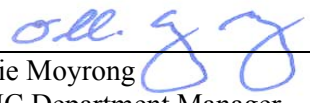

Ollie Moyrong
EMC Department Manager

TABLE OF CONTENTS

1.0	General Description	4
1.1	Product Description	4
1.2	Related Submittal(s) Grants	4
1.3	Test Methodology	4
1.4	Test Facility	4
1.5	Summary of Test Results	5
2.0	System Test Configuration.....	6
2.1	Justification.....	6
2.2	EUT Exercising Software	6
2.3	Mode of Operation.....	6
2.4	Support Equipment List and Description.....	7
2.5	Equipment Setup Block Diagram	7
2.6	Equipment Modification	7
3.0	Emission Test Results	8
3.1	Field Strength Calculation	9
3.2	Radiated Emission Data.....	10
3.3	AC Line Conducted Emission Data.....	12
3.4	Antenna Conducted Emission Data	15
4.0	List of Test Equipment	18
	Appendix A – EUT Specification.....	19
	Appendix B – Local Oscillator Frequency calculation.....	20
	Appendix C – Antenna Drawing	21

1.0 General Description

1.1 Product Description

The Equipment under Test (EUT) is Multi Trunk-Tracking Scanning Receiver, model PRO-2055.

Please refer to the attached specifications sheets in Appendix A for more details.

A pre-production version of the sample was received on March 14, 2005 in good condition. As declared by the Applicant, it is identical to production units.

1.2 Related Submittal(s) Grants

This is a single application for certification of a scanning receiver.

1.3 Test Methodology

Both conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4. All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Data Section"** of this Application.

1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1, a 10 meter semi-anechoic chamber. This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

1.5 Summary of Test Results

Model: PRO-2055
FCC ID: ADV2000428

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Complies
Antenna Conducted Emission	15.111	Complies
FCC Part 15. 121 Requirement	15.121	Complies *

* Refer to file: ADV2000428 REPORT FOR FCC RULE PART 15.121

2.0 System Test Configuration

2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

2.3 Mode of Operation

The EUT was tested in two modes:


Test Mode 1: The EUT was set to constantly receive at the low, middle and high channels of each band.

Test Mode 2: The EUT was set to constantly scan a particular band.

2.4 Support Equipment List and Description

Item #	Description	Model No.	Serial No.
1	External headphones	Avid	Not Labeled

2.5 Equipment Setup Block Diagram

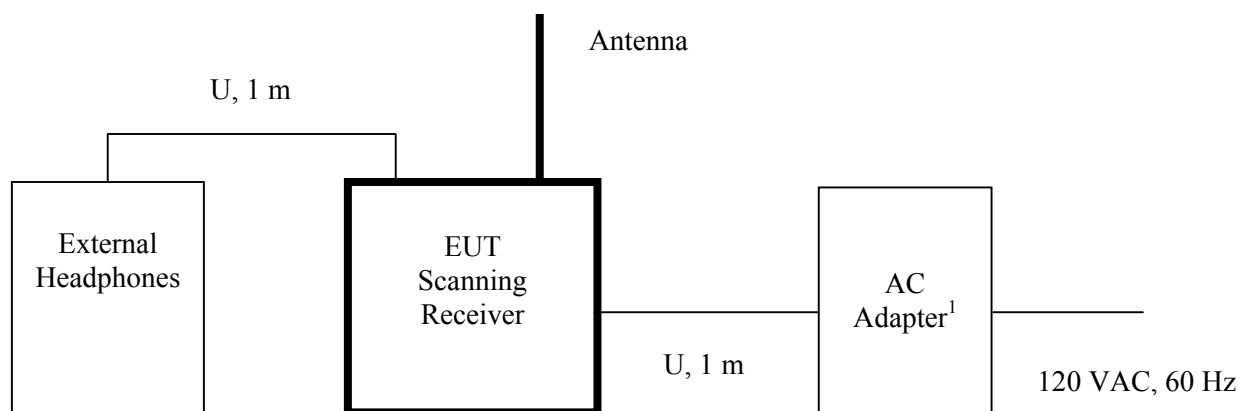

¹ The AC adapter is manufactured by RadioShack®, Part number JOD(M)-48-A641

U: Unshielded
m: meter

2.6 Equipment Modification

Any modifications installed previous to testing by GRE will be incorporated in each production model sold/leased in the United States.

Intertek Testing Services installed no modifications.

3.0 Emission Test Results

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 8000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Preliminary tests were performed to determine the worst-case emission with the EUT tuned to the low, middle and high channels of each band. From these preliminary measurements the EUT was tuned to the frequency with the highest emission and the final scan was performed using the automated test software.

The same procedure was used to determine the worst-case emission level with the EUT setup in scanning mode for each band.

The final recorded data reflects the worst-case result.

A sample calculation and data tables of the emissions are included.

All measurements were performed with peak detection unless otherwise specified.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

3.2 Radiated Emission Data

Tested By:	Bruce Gordon
Test Date:	March 19, 2005

Temperature (°C)	20°C
Relative Humidity (%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by 21.2 dB at 892.75 MHz
-----------------	--

3.2 Test Data(Continued)

Model: PR-2055

Test Mode: Receiving

Test distance: 3 m

FCC Part 15.109 Class B Radiated Emissions Data

Tuned Frequency	L.O. Frequency	Antenna Polarization	Corrected Reading	Limit at 3 m	Margin	SA Reading	Amp Gain	Cable Loss	Ant
MHz	MHz	H/V	dB(uV/m)	dB(uV/m)	dB	dBuV	dB	dB	dB/m
25.0	405.75	H	12.3	46.0	-30.7	25.5	32.3	3.0	16.0
39.5	420.25	H	11.5	46.0	-31.5	23.8	32.3	3.1	16.9
54.0	434.75	H	12.2	46.0	-30.8	24.9	32.3	3.1	16.5
108.0	488.75	H	13.4	46.0	-29.6	24.6	32.4	3.3	17.8
122.5	503.25	H	14.6	46.0	-28.4	25.4	32.4	3.4	18.1
136.99	517.74	H	14.3	46.0	-28.7	25.5	32.4	3.5	17.8
137.0	517.75	H	14.2	46.0	-28.8	25.4	32.4	3.5	17.8
155.5	536.25	H	15.0	46.0	-28.0	25.4	32.4	3.5	18.5
174.0	554.75	H	13.6	46.0	-29.4	23.5	32.5	3.6	18.9
216.0025	596.7525	H	15.7	46.0	-27.3	25.2	32.5	3.8	19.1
220.5	601.25	H	15.0	46.0	-28.0	24.4	32.5	3.8	19.2
225.0	605.75	H	13.1	46.0	-29.9	22.5	32.5	3.8	19.2
225.025	605.775	H	13.5	46.0	-29.5	23.0	32.5	3.8	19.2
315.5	696.25	H	13.9	46.0	-29.1	22.2	32.6	4.1	20.2
405.975	786.725	H	14.8	46.0	-28.2	21.5	32.5	4.3	21.4
406.0	786.75	H	14.7	46.0	-28.3	21.5	32.5	4.3	21.4
459.0	839.75	H	16.9	46.0	-26.1	22.6	32.3	4.6	22.0
512.0	892.75	H	21.8	46.0	-21.2	25.9	32.0	4.8	23.1
806.0	1186.75	H	22.3	54.0	-31.7	29.8	36.5	3.4	25.6
883.0	1263.75	H	23.1	54.0	-30.9	30.3	36.5	3.4	25.8
960.0	1340.75	H	22.7	54.0	-31.3	29.6	36.5	3.5	26.1
1240.0	1620.75	H	24.4	54.0	-29.6	29.6	36.5	4.2	27.1
1270.0	1650.75	H	24.3	54.0	-29.7	29.3	36.5	4.2	27.2
1300.0	1680.75	H	24.7	54.0	-29.3	29.6	36.5	4.2	27.3

- Notes:
1. Negative signs (-) in the Margin column signify levels below the limit.
 2. All readings below 1 GHz are quasi-peak, above 1 GHz – average.
 3. Cable Loss includes a 3dB external attenuator.
 4. All other readings not reported are at least 20 dB below the limit.
 5. For LO frequency calculation, see Appendix B

3.3 AC Line Conducted Emission Data


Tested By:	Bruce Gordon
Test Date:	March 19, 2005

Temperature	(°C)	20 ⁰ C
Relative Humidity	(%)	50%


The results on the following page(s) were obtained when the device was tested in the condition described in Section 2.

Results:	Complies by more than 9.1 dB at 1.1948 MHz
-----------------	---

3.3 Test Data (Continued)

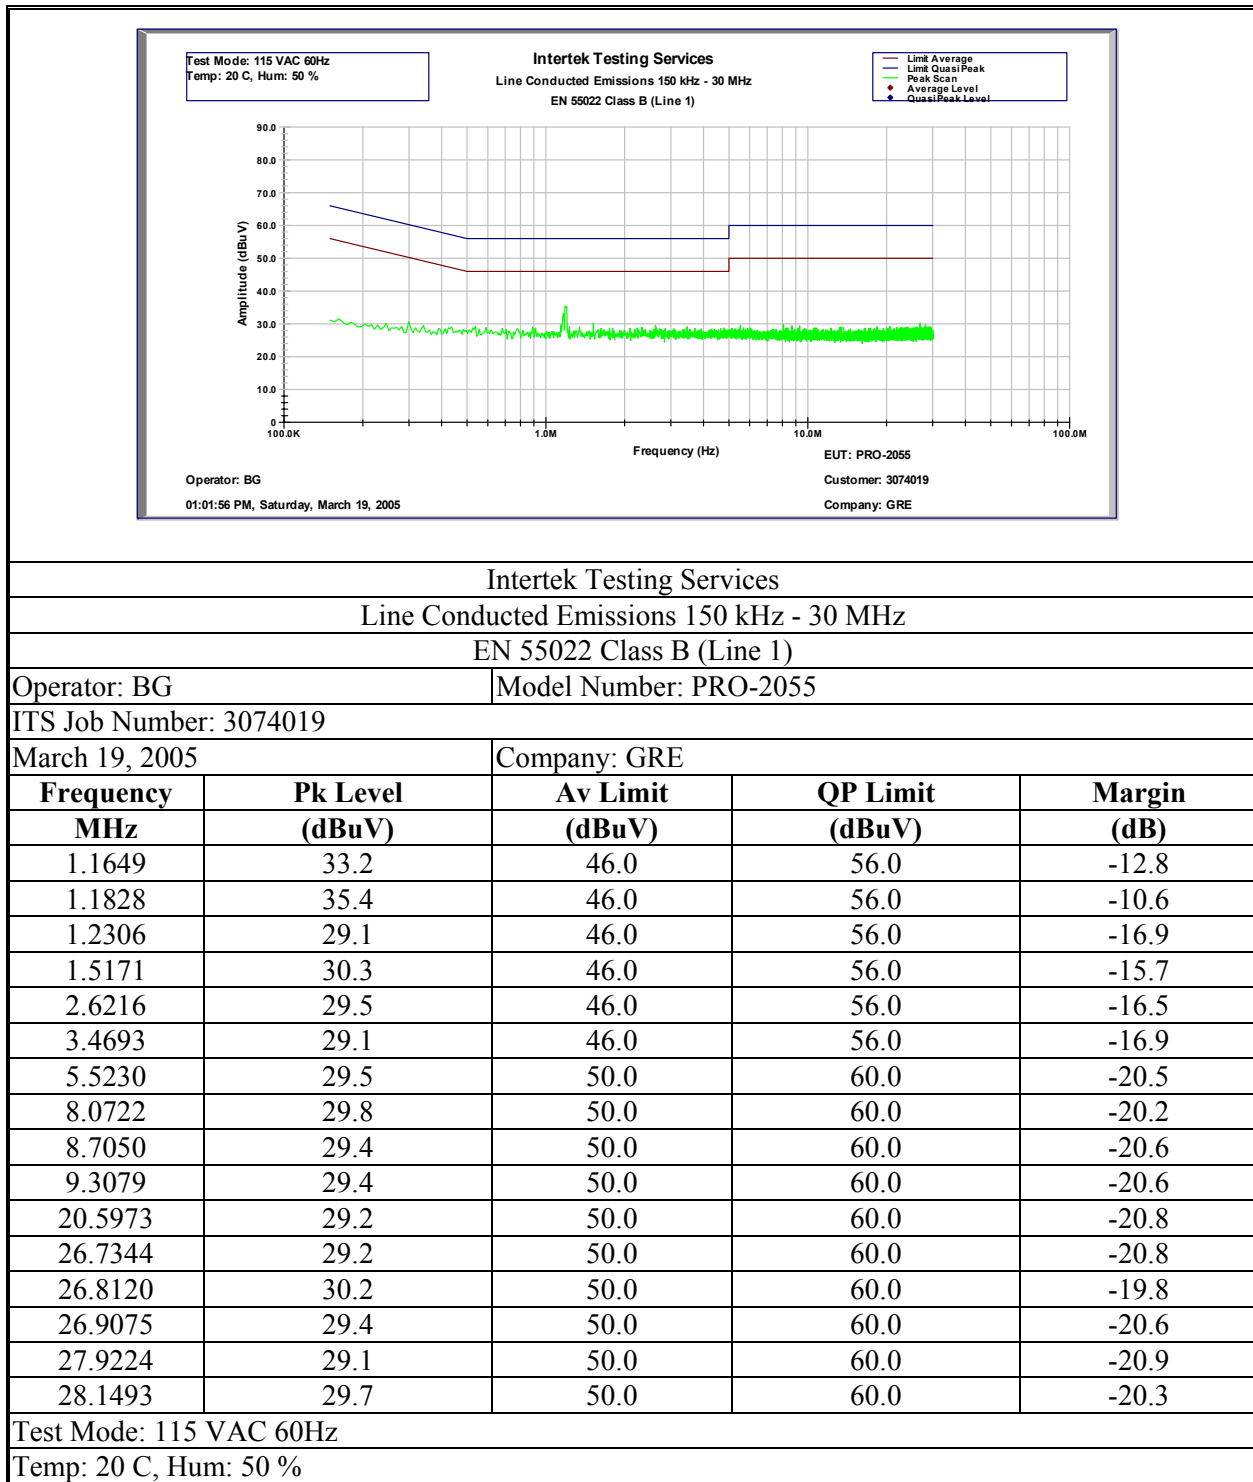

3.3 Test Data (Continued)

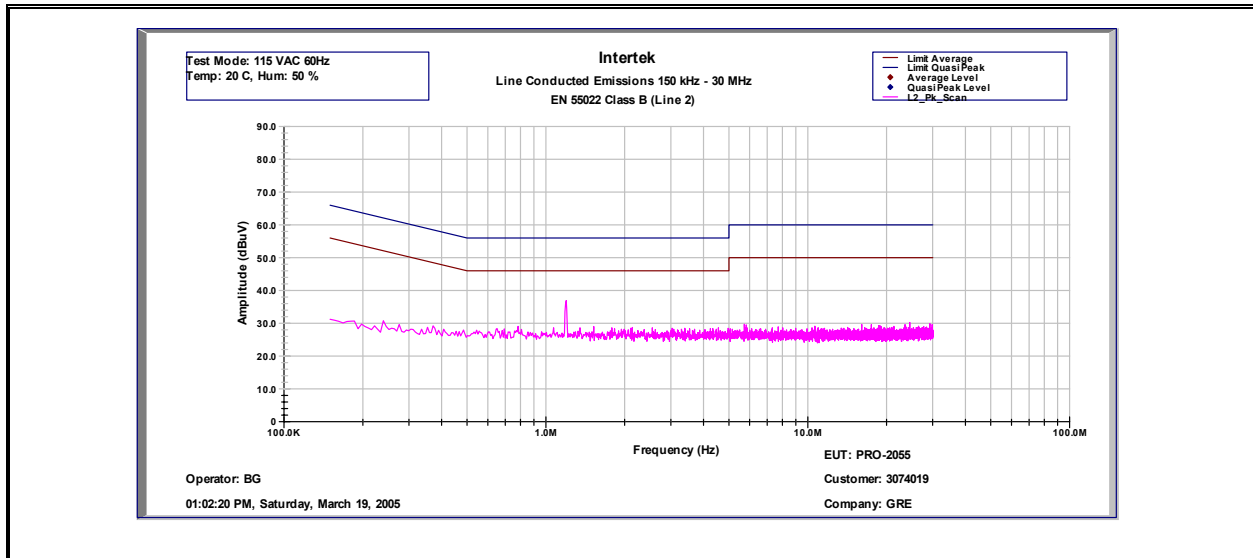

Intertek Testing Services				
Line Conducted Emissions 150 kHz - 30 MHz				
EN 55022 Class B (Line 2)				
Operator: BG		Model Number: PRO-2055		
ITS Job Number: 3074019				
March 19, 2005		Company: GRE		
Frequency	Pk Level	Av Limit	QP Limit	Margin
MHz	(dBuV)	(dBuV)	(dBuV)	(dB)
0.7828	29.0	46.0	56.0	-17.0
1.1948	36.9	46.0	56.0	-9.1
5.7259	29.7	50.0	60.0	-20.3
5.8215	29.5	50.0	60.0	-20.5
10.6453	29.1	50.0	60.0	-20.9
16.0541	29.6	50.0	60.0	-20.4
17.4809	29.5	50.0	60.0	-20.5
18.6391	29.2	50.0	60.0	-20.8
18.8540	29.2	50.0	60.0	-20.8
23.4748	29.5	50.0	60.0	-20.5
23.5106	29.5	50.0	60.0	-20.5
24.4837	30.2	50.0	60.0	-19.8
26.4598	29.1	50.0	60.0	-20.9
29.2299	29.9	50.0	60.0	-20.1
29.8508	29.6	50.0	60.0	-20.4
Test Mode: 115 VAC 60Hz				
Temp: 20 C, Hum: 50 %				


3.4 Antenna Conducted Emission Data

Tested By:	Bruce Gordon
Test Date:	March 19, 2005


Temperature	(°C)	20 ⁰ C
Relative Humidity	(%)	50%

The results on the following page(s) were obtained when the device was tested in the condition described in Section 2..

Results:	Complies by more than 10 dB
-----------------	------------------------------------

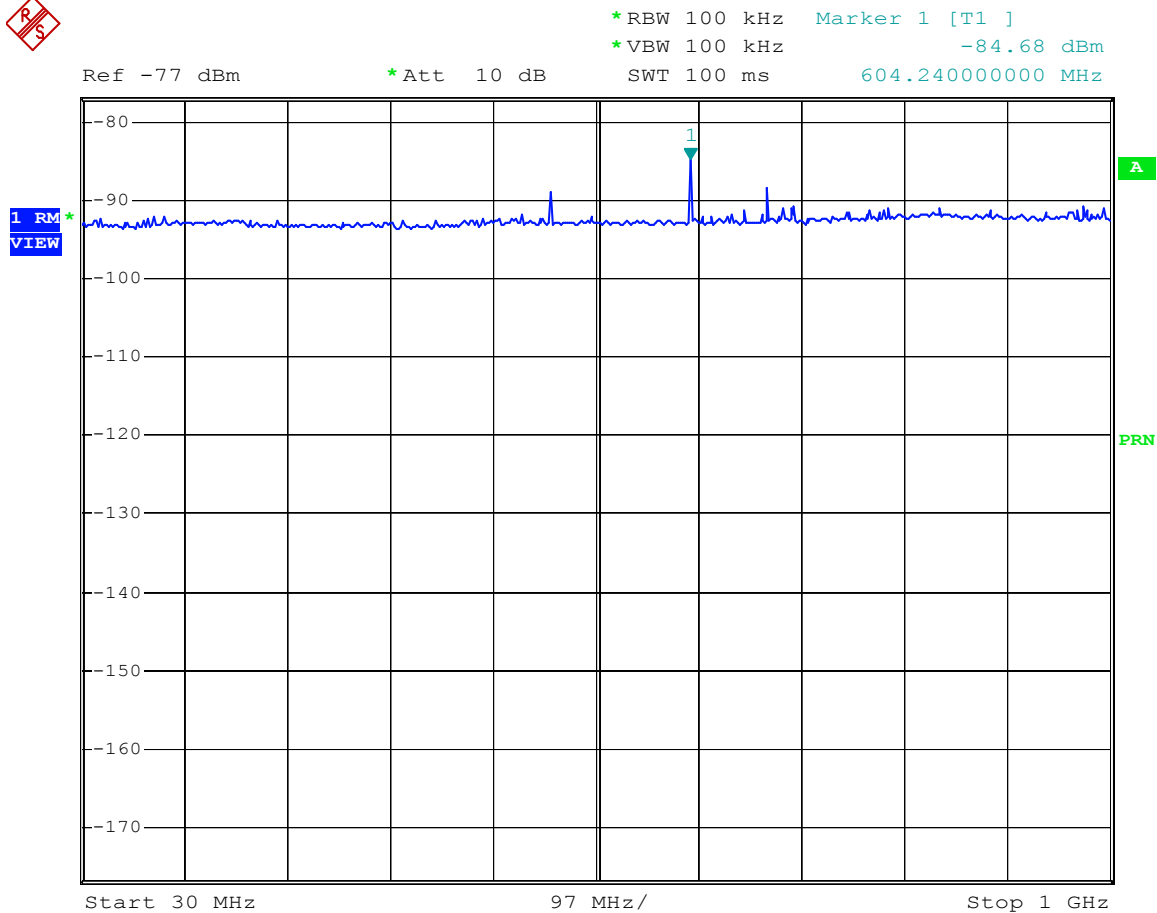

Comment: GRE PRO-20555, ADV2000428
 Date: 19.MAR.2005 12:26:20

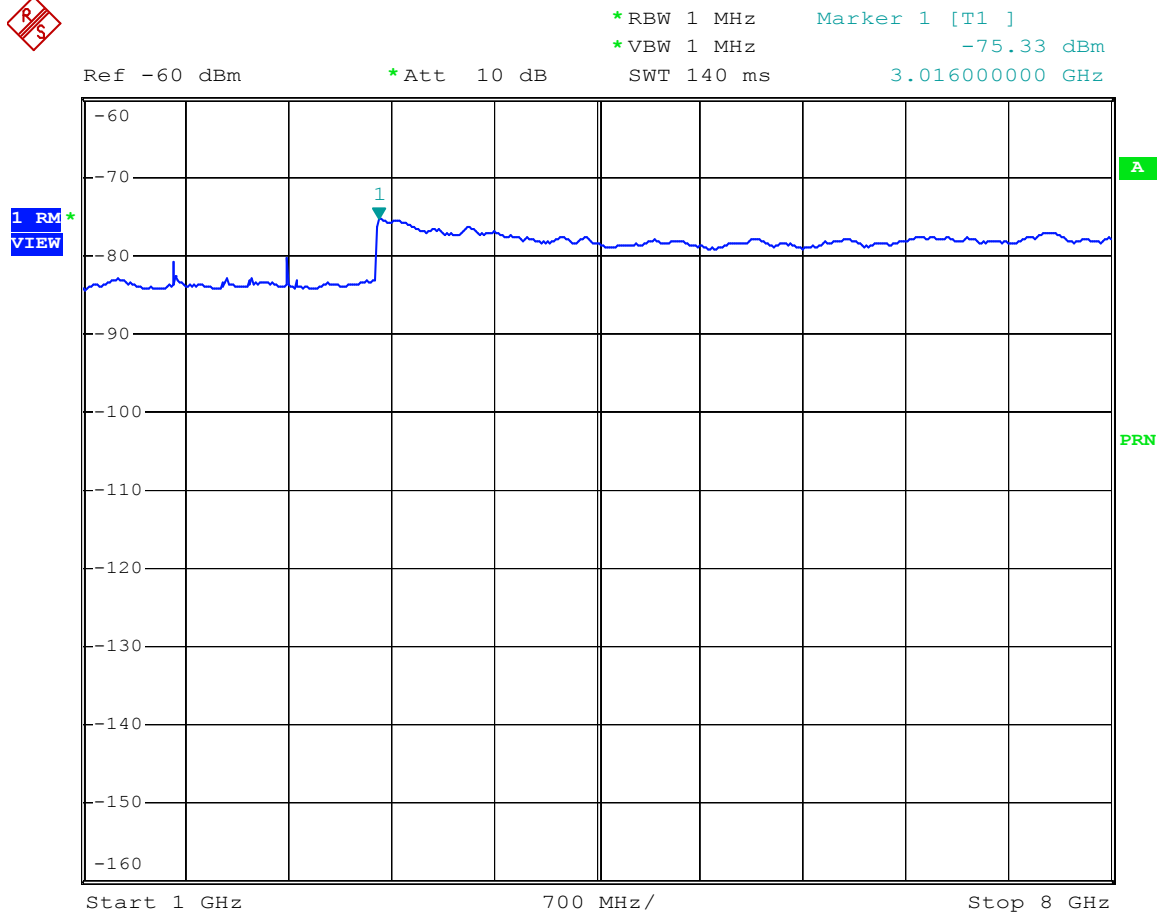

Comment: GRE PRO-20555, ADV2000428
 Date: 19.MAR.2005 12:43:15

4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	9/10/05
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	9/10/05
Spectrum Analyzer	Rhode-Schwarz	FSP-40	100030	12	9/15/05
BI-Log Antenna	EMCO	3143	9509-1164	12	4/06/05
LISN	Fischer	FCC-LISN-50/250-60-2-02	01005	12	7/2/05
Horn Antenna	EMCO	3115	8812-3049	12	4/14/05
Pre-Amplifier	Sonoma Inst.	310	185634	12	3/25/05
Pre-Amplifier	Miteq	AMF-4D-001180-24-10P	799159	12	3/25/05

Appendix A – EUT Specification

Refer to file: ADV2000428 SPECIFICATION



GENERAL RESEARCH OF ELECTRONICS, INC.

Phone: +813-5439-3611

Fax: +813-5439-3644

SHIBA NO.3 AMEREX BLDG.
No. 12-17 MITA 3-CHOME, MINATO-KU
TOKYO 108-0073, JAPAN

Tokyo: FEB. 14, 2005

Reference No. 05001

SPECIFICATIONS

SUBJECT: 1000 CHANNEL FREQUENCY MEMORIES WITH 1500 ID MEMORIES TRUNKING
SYSTEM, VHF/UHF PROGRAMMABLE WITH SIGNAL STALKER AND SKYWARN
AM/FM SCANNING RECEIVER PRO-2055 CAT. NO. 20-428

1. GENERAL

- 1.1 Programmable channel : 1000 channels (100 channels x 10 banks)
1500 ID memories (30 location x 5 sub-banks x 10 banks)
1 Limit search bank
1 Priority channel
7 WX frequencies
WX alert and SAME receiving with 10 FIPS (Federal Information
Processing Standard) area code memories
155 preprogrammed frequencies
- 1.2 Receiving mode : AM, FM, FM-MOT (Motorola), EDACS (GE/Ericsson/MA-COM),
LTR (EF Johnson), CTCSS and DCS
- 1.3 Receiving system : Triple conversion PLL superheterodyne
- 1st IF 380.8 MHz : The 1st Local OSC frequency for VHF
and UHF Low/T band employs upper
side of receiving frequency range.
- : The 1st Local OSC frequency for UHF
High band employs lower side of
receiving frequency range
- 2nd IF 21.4 MHz : The 2nd Local OSC frequency employs
lower side of 1st IF
- 3rd IF 455 kHz : The 3rd Local OSC frequency employs
lower side of 2nd IF.

– Continued –

PRODUCT DEVELOPMENT & MANUFACTURING

1.4	Frequency range	:	VHF Low	25 – 54 MHz
			VHF Aircraft	108 – 136.99166 MHz
			VHF High	137 – 174 MHz
				216.0025 – 225.000 MHz
			Military Air	225.025 – 405.975 MHz
			UHF Low	406 – 512 MHz
			UHF High	806 – 960 MHz
				1240 – 1300 MHz

Except cellular band: 824.000 – 848.9875 MHz and 869.000 – 893.9875 MHz

- | | | |
|------|-----------------------------|---|
| 1.5 | Pre-Programmed band search: | Marine |
| | | CB |
| | | FRS/GRMS/MURS |
| | | Fire/Police |
| | | Aircraft |
| | | Ham |
| 1.6 | WX frequencies | : 162.400, 162.425, 162.450, 162.475, 162.500, 162.525, 162.550 MHz |
| 1.7 | Scanning rate | : 60 channels/sec. |
| 1.8 | Search rate | : 75 steps/sec. |
| 1.9 | Display | : LED back-light LCD with 16 characters and 4 lines |
| 1.10 | Zeromatic | : Activates during search mode |
| 1.11 | Audio output | : 1.8 Watts |
| 1.12 | Signal Stalker band | : Police/Fire band |
| | | All frequencies range divided to 8 groups |
| | | Group 0 (25 – 54 MHz) |
| | | Group 1 (108 – 137 MHz) |
| | | Group 2 (137 – 174 MHz) |
| | | Group 3 (216 – 300 MHz) |
| | | Group 4 (300 – 406 MHz) |
| | | Group 5 (406 – 470 MHz) |
| | | Group 6 (470 – 512 MHz) |
| | | Group 7 (806 – 869 MHz) |
| | | Group 8 (894 – 960 MHz) |
| | | Group 9 (1240 – 1300 MHz) |
| 1.13 | Speaker | : Built-in 77 mm 8 Ohms dynamic speaker |
| 1.14 | Operating voltage | : DC 13.8 Volts |

- 1.15 Dimension : Approx. 185 (W) x 135 (D) x 55 (H) mm
- 1.16 Weight : Approx. 790 g without antenna and batteries
- 1.17 Accessory : Telescopic antenna, Owner's manual, Sleeve, Handle bracket, AC adapter and Other cabinet
- 1.18 Memory backup : No battery back-up required, EEPROM used
- 1.19 Drop test : In Gift-Box, Height 76 cm

2. ELECTRICAL

Standard Test Condition

- (1) Power source voltage : 13.8 Volts DC (Battery)
- (2) Antenna impedance : 50 Ohms
- (3) Test temperature : 25 degrees C
- (4) Standard signal level : 100 μ V
- (5) Modulation frequency : 1 kHz
- (6) Reference FM deviation : 3.0 kHz
- (7) Reference AM modulation : 60%
- (8) Reference audio output : 75 mWatts
- (9) Audio output load : 8 Ohm resistive load

2.1 Frequency range	Freq.	Step	Mode (Default)
	25.000 – 27.995 MHz	5 kHz	AM
	28.000 – 54.000 MHz	5 kHz	FM
	108.000 – 136.99166 MHz	8.33 kHz	AM
	137.000 – 137.995 MHz	5 kHz	FM
	138.000 – 143.9875 MHz	12.5 kHz	FM
	144.000 – 148.000 MHz	5 kHz	FM
	148.0125 – 150.775 MHz	12.5 MHz	FM
	150.7825 – 150.8125 MHz	7.5 kHz	FM
	150.8150 – 154.4525 MHz	7.5 kHz	FM
	154.45625 – 154.47875 MHz	7.5 kHz	FM
	154.4825 – 154.5050 MHz	7.5 kHz	FM
	154.5100 – 154.5250 MHz	5 kHz	FM
	154.52750 – 154.54625 MHz	6.25 kHz	FM
	154.5475 – 154.6075 MHz	7.5 kHz	FM
	154.610 – 154.655 MHz	5 kHz	FM
	154.6575 – 156.2475 MHz	7.5 kHz	FM
	156.250 – 157.475 MHz	5 kHz	FM
	157.4775 – 161.5650 MHz	7.5 kHz	FM
	161.570 – 162.020 MHz	5 kHz	FM

<u>Freq.</u>	<u>Step</u>	<u>Mode (Default)</u>
162.025 – 173.200 MHz	12.5 kHz	FM
173.20375 – 173.22250 MHz	6.25 kHz	FM
173.22500 – 173.38750 MHz	6.25 kHz	FM
173.39000 – 173.40875 MHz	6.25 kHz	FM
173.4125 – 174.000 MHz	12.5 kHz	FM
216.0025 – 221.9975 MHz	5 kHz	FM
222.000 – 225.000 MHz	5 kHz	FM
225.025 – 405.975 MHz	25 kHz	AM
406.000 – 512.000 MHz	6.25 kHz	FM
806.000 – 960.000 MHz	6.25 kHz	FM
1240.000 – 1300.000 MHz	6.25 kHz	FM

Except cellular band: 824 – 848.9875 MHz and 869 – 893.9875 MHz

		Nominal	Limit
2.2	Sensitivity		
	FM: (S+N)/N = 20 dB		
	Dev.: 3 kHz at 1 kHz		
	: VHF Low	0.3 μ V	1 μ V
	: VHF Aircraft	0.3 μ V	1 μ V
	: VHF High	0.5 μ V	2 μ V
	: Military	1 μ V	3 μ V
	: UHF Low/T	0.5 μ V	2 μ V
	: UHF High 806 – 960 MHz	0.7 μ V	3 μ V
	: 1240 – 1300 MHz	0.7 μ V	4 μ V
	AM: (S+N)/N = 20 dB		
	Mod.: 60% at 1 kHz		
	: VHF Low	1 μ V	3 μ V
	: VHF Aircraft	1 μ V	3 μ V
	: VHF High	1.5 μ V	5 μ V
	: Military	3 μ V	10 μ V
	: UHF Low/T	2 μ V	6 μ V
	: UHF High 806 – 960 MHz	2 μ V	6 μ V
	: 1240 – 1300 MHz	3 μ V	12 μ V
2.3	Signal stalker sensitivity		
	: 450 MHz	-60 dBm	-50 dBm
2.4	Data decode sensitivity		
	ED		
	: ED (GE/Ericsson/MA-COM)	1 μ V	4 μ V
	4 kHz Dev. at 450, 860 MHz		
	MO (Voice channel)		
	: MO (Motorola)	0.5 μ V	2 μ V
	350 Hz Dev. at 174, 450, 860 MHz		
	MO (Control channel)		
	: MO (Motorola)	1 μ V	4 μ V
	4 kHz Dev. at 174, 450, 860 MHz		
	LTR		
	: LTR (EF Johnson)	0.8 μ V	3 μ V
	800 Hz Dev. at 450, 860 MHz		

		Nominal	Limit
	WX Alert 1050 Hz tone : 3 kHz Dev. at 162.4 MHz	0.3 μ V	1 μ V
	WX Digital Weather Alert : 4 kHz Dev. at 162.4 MHz	0.5 μ V	2 μ V
2.5	CTCSS decode sensitivity : 350 Hz Dev. at 450, 860 MHz	1 μ V	3 μ V
2.6	DCS decode sensitivity : 350 Hz Dev. at 450, 860 MHz	1 μ V	3 μ V
2.7	WX alert tone decode range : 4 kHz Dev. 2 μ V at 162.400 MHz	1050 \pm 25 Hz	\pm 40 Hz
2.8	WX alert tone checking time : 4 kHz Dev. 2 μ V at 162.400 MHz	2.2 sec.	2 – 5 sec.
Note: When receiving WX alert in priority operation, the priority sampling time up to 2 sec. is added to this depending on Alert tone transmission timing.			
2.9	WX alert sound level at 1 ft. :	80 dB	70 dB
2.10	Image ratio 1 st IF image : VHF Low at 41 MHz	50 dB	40 dB
	VHF Aircraft at 124 MHz	50 dB	40 dB
	VHF High at 154.1 MHz	50 dB	40 dB
	Military Air at 310 MHz	40 dB	30 dB
	UHF Low/T at 450 MHz	50 dB	40 dB
	UHF High at 860 MHz	80 dB	60 dB
	1270 MHz	55 dB	40 dB
	2 nd IF image : VHF High at 154.1 MHz	50 dB	40 dB
2.11	Attenuator : VHF Low	20 dB	17 – 24 dB
	VHF Aircraft	20 dB	17 – 24 dB
	VHF High	20 dB	17 – 24 dB
	UHF Low	15 dB	10 – 20 dB
	UHF High	13 dB	8 – 18 dB
2.12	Squelch sensitivity (Band center)		
	Threshold : AM/FM	0.5 μ V	2 μ V
	Tight: (S+N)/N : AM	20 dB	10 dB
	FM	25 dB	15 dB

			Nominal	Limit
2.13	Selectivity			
	AM 25 – 27.995 MHz	: -6 dB	±5 kHz	±7 kHz
		-50 dB	±6 kHz	±10 kHz
	Other frequency	: -6 dB	±10 kHz	±14 kHz
		-50 dB	±18 kHz	±25 kHz
2.14	Spurious rejection (Except Primary image)	: VHF High at 154.1 MHz	40 dB	30 dB
2.15	IF rejection ratio	: 380.8 MHz at 154.1 MHz	60 dB	40 dB
		21.4 MHz at 154.1 MHz	100 dB	80 dB
		Fr 225 – 300 MHz	30 dB	not specified
		300 – 405.975 MHz	10 dB	not specified
2.16	Acceptable radio frequency displacement at EIA RS-204D	:	±6 kHz	±3 kHz
2.17	Signal to noise ratio	: 25 – 54 MHz	40 dB	30 dB
	AM/FM	108 – 136.9875 MHz	40 dB	30 dB
	RF: 100 μ V	137 – 174 MHz	40 dB	30 dB
	Dev.: 3 kHz at 1 kHz	216.0025 – 225 MHz	40 dB	30 dB
	Mod. 60% at 1 kHz	225.025 – 405.975 MHz	35 dB	25 dB
		406 – 512 MHz	35 dB	25 dB
		806 – 960 MHz	35 dB	25 dB
		1240 – 1300 MHz	35 dB	25 dB
2.18	Residual noise Vol. min. and Squelched	:	2 mV	5 mV
2.19	Scanning rate without trunking: (in 1 MHz: Intervals)	406 – 505 MHz	60 ch/sec.	33 – 66 ch/sec.
2.20	Search rate	: at 162.25 – 167.25 MHz	75 steps/sec.	60 – 95 steps/sec.
2.21	Signal Stalker Time	: Police/Fire band	0.75 sec.	0.825 sec.
	One active signal	All band	5.8 sec.	6.38 sec.
	the Other no signal			
2.22	Scan and Search delay time	:	2 sec.	1 – 3 sec.
2.23	Audio output (T.H.D. 10 %)	: RF input: 100 μ V at 154.1 MHz		
	8 Ohms R Load, 1 kHz		1.5 Watts	1.0 Watts

		Nominal	Limit
2.24	T.H.D. at 50 mWatt : RF input: 100 μ V at 154.1 MHz	1 %	5 %
2.25	Audio max. power : RF input: 100 μ V at 154.1 MHz		
	8 Ohm internal speaker	1.8 Watts	1.3 Watts
	32 Ohm at headphone mono/stereo (each phone)	19/14 mWatts	28/28 mWatts
2.26	Audio frequency response at : RF input: 100 μ V at 154.1 MHz	300 Hz	200 – 400 Hz
	–6 dB	2.0 kHz	1.5 – 3.0 kHz
2.27	Intermediate frequency : 1 st 380.8 MHz		
	2 nd 21.4 MHz		
	3 rd 455 kHz		
2.28	Current drain at 13.8 Volts : Vol. Max.	450 mA	550 mA
	8 Ohm internal speaker at 154.1 MHz	Squelch	250 mA
2.29	Current drain : Vol. Max.	100 mA AC	120 mA AC
	AC adapter GA-04D-1100	Squelch	70 mA AC
	8 Ohm internal speaker at 154.1 MHz	60 mA AC	
2.30	Birdies and step frequency : Under discussion		
	when search		
2.31	Filter : Saw filter for 380.8 MHz, Monolithic crystal filter for 21.4 MHz		
	and ceramic filter for 455 kHz		
2.32	Antenna impedance : 50 Ohms		
2.33	Temperature range : Test to specification between: +18°C – +35°C		
	Operate (Need not meet spec.): -20°C – +60°C		

3. OPERATING CONTROLS AND CONNECTIONS

3.1 Volume control with power switch

3.2 Squelch control

3.3 Keyboard (30 keys): FUNCtion, PGM, WX/Skywarn, TRUNK, MANUAL, PRI, TUNE, TEXT, ATT, PAUSE, MODE, ▲, ▼, DIM, SCAN/Signal stalker, SEARCH, L/OUT, ENTER, CL, 1, ABC/2, DEF/3, GHI/4, JKL/5, MNO/6, PQRS/7, TUV/8, WXYZ/9, 0, • and DELAY

- 3.4 LCD display: 16 characters and 4 lines
Frequency, Mode, ch, Bank, etc.
- 3.5 BNC type antenna connector
- 3.6 Earphone jack (D = 3.5 mm stereo)
- 3.7 External power jack
- 3.8 PC Interface and Clone jack (D = 3.5 mm mono)
- 3.9 Reset switch

4. FEATURES

- 4.1 10 bank and 1000 channel memories for trunking bank and channel combined with conventional mode memory
- 4.2 Multi trunking of Motorola (type I , II and hybrid analog system), EDACS and LTR
- 4.3 CTCSS and DCS Subaudible encoded squelch mode
- 4.4 Scan both trunking channels and conventional channels at same time
- 4.5 1500 ID memories in 10 ID banks, 5 sub-ID memories in each bank and each sub-ID memory has 30 ID locations.
- 4.6 Alphanumeric data entry
- 4.7 Clone the memory to other unit
- 4.8 Signal stalker function (Total 200 lock out frequencies in signal stalker, All Band 150, Police/Fire Band 50)
- 4.9 Pre-programmed Marine, CB, FRS/GRMS/MURS, Fire/Police, Aircraft, Ham and Weather frequencies
- 4.10 WX alert and SAME receiving with 10 FIPS (Federal Information Processing Standard) area code memories
- 4.11 Skywarn function
- 4.12 Attenuator control (Normal attenuator and Global attenuator)
- 4.13 Frequency tune mode (Frequency ▲ or ▼)
- 4.14 "Zeromatic" tuning system

- 4.15 Change the direction at the searching by ▲ (up) or ▼ (down)
- 4.16 60 channels/sec. scanning rate and 75 steps/sec. searching rate
- 4.17 2 second scan and search delay
- 4.18 Manual selection for channel
- 4.19 Scan mode [Cleared channels (000.000 freq.) are not scan.]
- 4.20 Deleting a frequency from a channel
- 4.21 1 limit search bank
- 4.22 Key tone and alert tone
- 4.23 16 characters and 4 lines dot matrix LCD (Indicate channel numbers, Frequency, ID number and the data on the LCD)
- 4.24 LCD and keyboard backlighting with dimmer switch
- 4.25 LCD contrast control
- 4.26 Crystal filter for 2nd IF and Ceramic filter for 3rd IF section
- 4.27 50 lock out frequencies per search bank, Fire/Police, Aircraft, Ham, Limit search (Totaling 200 frequencies)
- 4.28 Frequency lock-out review and Channel lock-out review
- 4.29 155 preprogrammed frequencies

Appendix B – Local Oscillator Frequency calculation

Refer to file: ADV2000428 LOCAL OSC Freq CALCULATION

MODEL NO. PRO-2055

1 LOCAL OSC FREQUENCY CALCULATION

-1 MODEL NO. PRO-2055 formula for 1st, 2nd and 3rd Local oscillation frequencies are as follow :

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	5.0	25.0000 ~ 54.0000	$A = (FR + 380.800) / 0.075$ $= A.xxx \text{ (Cut away decimal)}$ 1st Local = $A \times 0.075$ 1st IF = 1st Local - FR	2nd Local = 1st IF - 21.4	20.9450
VHF High	8.33	108.0000 ~ 136.99166		2nd Local = 1st IF - 21.4	20.9450
	5.0	137.0000 ~ 137.9950		"	"
	12.5	138.0000 ~ 143.9875		"	"
	5	144.0000 ~ 148.0000		"	"
	12.5	148.0125 ~ 150.7750		"	"
	7.5	150.7825 ~ 150.8125		2nd Local = 1st IF - 21.4025	20.9475
	"	150.8150 ~ 154.4525		2nd Local = 1st IF - 21.4	20.9450
	"	154.45625 ~ 154.47875		"	"
	"	154.4825 ~ 154.5050		"	"
	5.0	154.5100 ~ 154.5250		"	"
	6.25	154.52750 ~ 154.54625		2nd Local = 1st IF - 21.3975	20.9425
	7.5	154.5475 ~ 154.6075		2nd Local = 1st IF - 21.4025	20.9475
	5.0	154.6100 ~ 154.6550		2nd Local = 1st IF - 21.4	20.9450
	7.5	154.6575 ~ 156.2475		2nd Local = 1st IF - 21.3975	20.9425
	5.0	156.2500 ~ 157.4750		2nd Local = 1st IF - 21.4	20.9450
	7.5	157.4775 ~ 161.5650		2nd Local = 1st IF - 21.3975	20.9425
	5.0	161.5700 ~ 162.0200		2nd Local = 1st IF - 21.4	20.9450
	12.5	162.0250 ~ 173.2000		"	"
	6.25	173.20375 ~ 173.22250		2nd Local = 1st IF - 21.4025	20.9475
	"	173.22500 ~ 173.38750		2nd Local = 1st IF - 21.4	20.9450
	"	173.39000 ~ 173.40875		2nd Local = 1st IF - 21.3975	20.9425
	12.5	173.4125 ~ 174.0000		2nd Local = 1st IF - 21.4	20.9450
	5.0	216.0025 ~ 221.9975		2nd Local = 1st IF - 21.4025	20.9475
	"	222.0000 ~ 225.0000		2nd Local = 1st IF - 21.4	20.9450
UHF Low	25.0	225.0250 ~ 316.5250		2nd Local = 1st IF - 21.4	20.9450
	"	316.5500 ~ 316.6500	$A = (FR + 380.700) / 0.075$	"	"
	"	316.6750 ~ 337.9475	$A = (FR + 380.800) / 0.075$	"	"
	"	337.9500 ~ 338.0000	$A = (FR + 380.700) / 0.075$	"	"
	"	338.0250 ~ 359.3250	$A = (FR + 380.800) / 0.075$	"	"
	"	359.3500 ~ 359.4000	$A = (FR + 380.700) / 0.075$	"	"
	"	359.4250 ~ 380.7000	$A = (FR + 380.800) / 0.075$	"	"
	"	380.7250 ~ 380.8000	$A = (FR + 380.700) / 0.075$	"	"
	"	380.8250 ~ 400.0000	$A = (FR + 380.800) / 0.075$	"	"
	"	400.0250 ~ 405.9750	$A = (FR + 380.700) / 0.075$	"	"
	6.25	406.0000 ~ 512.0000	$A = (FR + 380.800) / 0.075$	"	"
UHF High	6.25	806.0000 ~ 823.9875	$A = (FR - 380.800) / 0.075$	2nd Local = 1st IF - 21.4	20.9450
	"	849.0000 ~ 868.9875	$= A.xxx \text{ (Cut away decimal)}$	"	"
	"	894.0000 ~ 960.0000	1st Local = $A \times 0.075$	"	"
	"	1240.0000 ~ 1300.0000	1st IF = FR - 1st Local	"	"

FR DENOTES Frequency Received.

-2 IF FREQUENCY

1st IF : 380.6500 ~ 380.86875Hz

2nd IF : 21.3975MHz / 21.4000MHz / 21.4025MHz

3rd IF : 455kHz

-3 Example


RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	5.0	25.0000	$A : 5410.666 = (25.0000 + 380.800) / 0.075$ $= 5410.666$ (Cut away decimal) 1st Local : $405.750 = 5410 \times 0.075$ 1st IF : $380.750 = 405.750 - 25.0000$	$359.350 = 380.750 - 21.4$	20.9450
		40.0000	$5610.666 = (40.0000 + 380.800) / 0.075$ $= 5610.666$ (Cut away decimal) $420.750 = 5610 \times 0.075$ $380.750 = 420.750 - 40.0000$	$359.350 = 380.750 - 21.4$	20.9450
		54.0000	$5797.333 = (54.0000 + 380.800) / 0.075$ $= 5797.333$ (Cut away decimal) $434.775 = 5797 \times 0.075$ $380.775 = 434.775 - 54.0000$	$359.375 = 380.775 - 21.4$	20.9450
VHF High	8.33	108.0000	$6517.333 = (108.0000 + 380.800) / 0.075$ $= 6517.333$ (Cut away decimal) $488.775 = 6517 \times 0.075$ $380.775 = 488.775 - 108.0000$	$359.375 = 380.775 - 21.4$	20.9450
	6.25	154.5275	$7137.7 = (154.5275 + 380.800) / 0.075$ $= 7137.7$ (Cut away decimal) $535.275 = 7137 \times 0.075$ $380.7475 = 535.275 - 154.5275$	$359.350 = 380.7475 - 21.3975$	20.9425
	12.5	174.0000	$7397.333 = (174.0000 + 380.800) / 0.075$ $= 7397.333$ (Cut away decimal) $554.775 = 7397 \times 0.075$ $380.775 = 554.775 - 174.0000$	$359.375 = 380.775 - 21.4$	20.9450
	5.0	216.0025	$7957.366 = (216.0025 + 380.800) / 0.075$ $= 7957.366$ (Cut away decimal) $596.775 = 7957 \times 0.075$ $380.7725 = 596.775 - 216.0025$	$359.370 = 380.7725 - 21.4025$	20.9475
	5.0	225.0000	$8077.333 = (225.0000 + 380.800) / 0.075$ $= 8077.333$ (Cut away decimal) $605.775 = 8077 \times 0.075$ $380.775 = 605.775 - 225.0000$	$359.375 = 380.775 - 21.4$	20.9450

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
UHF Low	25.0	310.0000	$9210.666 = (310.0000 + 380.800) / 0.075$ $= 9210.666$ (Cut away decimal) $690.750 = 9210 \times 0.075$ $380.750 = 690.750 - 310.0000$	$359.350 = 380.750 - 21.4$	20.9450
	6.25	406.0000	$10490.666 = (406.0000 + 380.800) / 0.075$ $= 10490.666$ (Cut away decimal) $786.750 = 10490 \times 0.075$ $380.750 = 786.750 - 406.0000$	$359.350 = 380.750 - 21.4$	20.9450
		446.0000	$11024.000 = (446.0000 + 380.800) / 0.075$ $= 11024.000$ (Cut away decimal) $826.800 = 11024 \times 0.075$ $380.800 = 826.800 - 446.0000$	$359.400 = 380.800 - 21.4$	20.9450
		512.0000	$11904.000 = (512.0000 + 380.800) / 0.075$ $= 11904.000$ (Cut away decimal) $892.800 = 11904 \times 0.075$ $380.800 = 892.800 - 512.0000$	$359.400 = 380.800 - 21.4$	20.9450
UHF High	6.25	806.0000	$5669.333 = (806.0000 - 380.800) / 0.075$ $= 5669.333$ (Cut away decimal) $425.175 = 5669 \times 0.075$ $380.825 = 806.000 - 425.175$	$359.425 = 380.825 - 21.4$	20.9450
		860.0000	$6389.333 = (860.0000 - 380.800) / 0.075$ $= 6389.333$ (Cut away decimal) $479.175 = 6389 \times 0.075$ $380.825 = 860.000 - 479.175$	$359.425 = 380.825 - 21.4$	20.9450
		960.0000	$7722.666 = (960.0000 - 380.800) / 0.075$ $= 7722.666$ (Cut away decimal) $579.150 = 7722 \times 0.075$ $380.850 = 960.000 - 579.150$	$359.450 = 380.850 - 21.4$	20.9450
		12400.0000	$11456.000 = (1240.0000 - 380.800) / 0.075$ $= 11456.000$ (Cut away decimal) $859.200 = 11456 \times 0.075$ $380.800 = 1240.000 - 859.200$	$359.400 = 380.800 - 21.4$	20.9450
		1300.0000	$12256.000 = (1300.0000 - 380.800) / 0.075$ $= 12256.000$ (Cut away decimal) $919.200 = 12256 \times 0.075$ $380.800 = 1300.000 - 919.200$	$359.400 = 380.800 - 21.4$	20.9450

Appendix C – Antenna Drawing

Refer to file: ADV2000428 Telescopic ANT Drawing

第三角畫法	REV.	ISSUE FOR	OLD DRAWING NO.	80<L<=250	±0.50
SA0400267	①	根据客戶要求改善BNC頭,其餘不變.	JF5214901B001A-G96	25<L<=80	±0.40
				8<L<=25	±0.30
				L<=8	±0.20
				線性尺寸L	未注尺寸偏差
					未注明公差

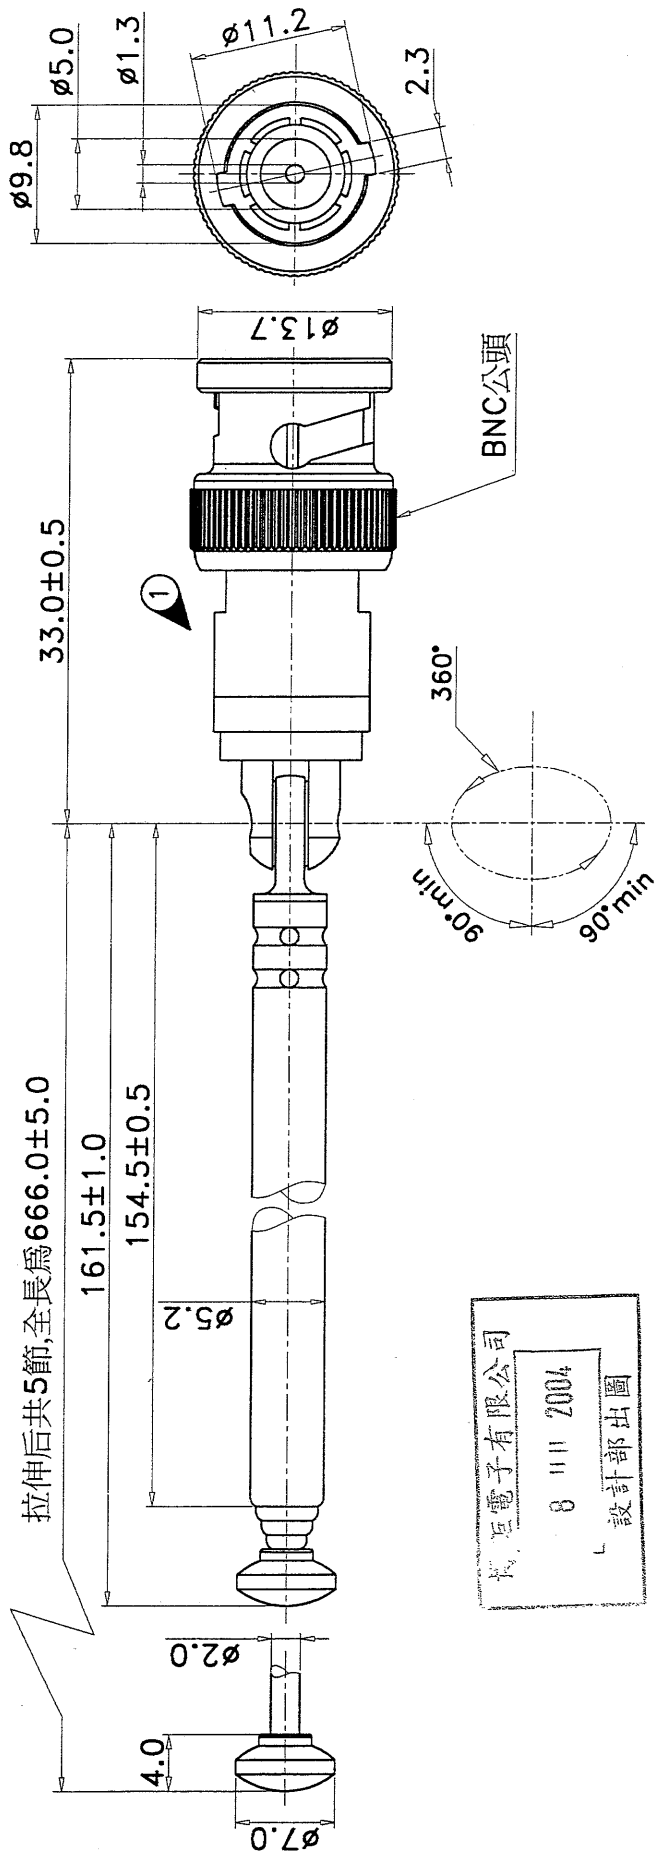

- 1) Wide Receives : 25-1300 MHz receive coverage for VHF-Lo, VHF-Hi, UHF.
- 2) Telescopic antenna with BNC connector.
- 3) Impedance : 50 ohm

TITLE	伸縮天線	SCALE	2 : 1	DRAWN	劉曉敏	03/07/04
PART NAME	JF-52149(G96-001/B)	MATERIAL		INSPECTED		
		HANDLING		APPROVED	Handy	18/7/04
BONDALE ELECTRONICS LTD.			DRAWING NO.	JF5214901B001B-G96		