

TEST REPORT

Report Number: 30430841
Project Number: 3043084
Report Date: May 30, 2003

Testing performed on the

Scanning Receiver

Model: 20-526

FCC ID: ADV2000526

to

FCC Part 15 Subpart B

for

General Research of Electronics, Inc



A2LA Certificate Number: 1755-01

Test Performed by:

Intertek Testing Services
1365 Adams Court
Menlo Park, CA 94025

Test Authorized by:

General Research of Electronics, Inc
Shiba NO.3 Amerex Bldg.
No. 12-17 Mita 3-Chome, Minato-Ku
Tokyo 108-0073, Japan



Prepared by:

David Chernomordik
David Chernomordik, EMC Technical Manager

Date *5/31/03*



Reviewed by:

Ollie Moyrong
Ollie Moyrong, EMC Manager

Date *5/31/03*



All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services NA Inc. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.



Intertek Testing Services NA, Inc.

1365 Adams Court, Menlo Park, CA 94025

Telephone 650-463-2900 Fax 650-463-2910 Home Page www.etlsemko.com



TABLE OF CONTENTS

1.0	General Description	3
1.1	Product Description	3
1.2	Related Submittal(s) Grants	3
1.3	Test Methodology	3
1.4	Test Facility	3
1.5	Summary of Test Results	4
2.0	System Test Configuration.....	5
2.1	Justification.....	5
2.2	EUT Exercising Software	5
2.3	Mode of Operation.....	5
2.4	Support Equipment List and Description.....	6
2.5	Equipment Setup Block Diagram	6
2.6	Equipment Modification	6
3.0	Emission Test Results	7
3.1	Field Strength Calculation	8
3.2	Radiated Emission Data	9
3.3	AC Line Conducted Emission Data	11
3.4	Antenna Conducted Emission Data	14
4.0	List of Test Equipment	17
	Appendix A	18
	Appendix B	28

GRE, Model No: 20-526

FCC ID: ADV2000526

Date of Test: May 19, 2003

1.0 General Description

1.1 Product Description

The Equipment under Test (EUT) is VHF/UHF Programmable AM/FM-Digital Trunking Handheld Scanning Receiver PRO-96 CAT. NO. 20-526.

Please refer to the attached specifications sheets in Appendix A for more details.

A pre-production version of the sample was received on May 18, 2003 in good condition. As declared by the Applicant, it is identical to production units.

1.2 Related Submittal(s) Grants

This is a single Application for Certification of a scanning receiver.

1.3 Test Methodology

Both AC mains line-conducted (if applicable) and radiated emission measurements were performed according to the procedures in ANSI C63.4 (1992). All radiated measurements were performed in a semi-anechoic chamber. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Data Section”** of this Application.

1.4 Test Facility

The test site and conducted measurement facility used to collect the radiated data is Site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC and A2LA accredited.

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

1.5 Summary of Test Results

Model: 20-526
FCC ID: ADV2000526

TEST	REFERENCE	RESULTS
Radiated Emission	15.109	Complies
AC Line Conducted Emission	15.107	Complies
Antenna Conducted Emission	15.111	Complies
FCC Part 15.121 Requirement	15.121	Complies *

* See File "Report for FCC Rule Part 15.121"

GRE, Model No: 20-526
Date of Test: May 19, 2003
2.0 System Test Configuration

FCC ID: ADV2000526

2.1 Justification

The tests were performed according to the test procedure as outlined in CFR47 Part 15.31 and in ANSI C63.4.

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst-case emissions.

For the measurements, the EUT is placed on top of a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible).

For radiated emission measurements, the signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance if measured at a closer distance.

2.2 EUT Exercising Software

The unit was setup to receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

2.3 Mode of Operation

The EUT was tested in two modes and the worst-case emission was recorded:

Test Mode 1: The EUT was set to constantly receive at a particular frequency (1 near the top, 1 near the middle, and 1 near the bottom of each band).

Test Mode 2: The EUT was set to constantly scan and receive a particular band.

GRE, Model No: 20-526


FCC ID: ADV2000526

Date of Test: May 19, 2003

2.4 Support Equipment List and Description

None. The EUT was tested as a stand-alone device.

2.5 Equipment Setup Block Diagram

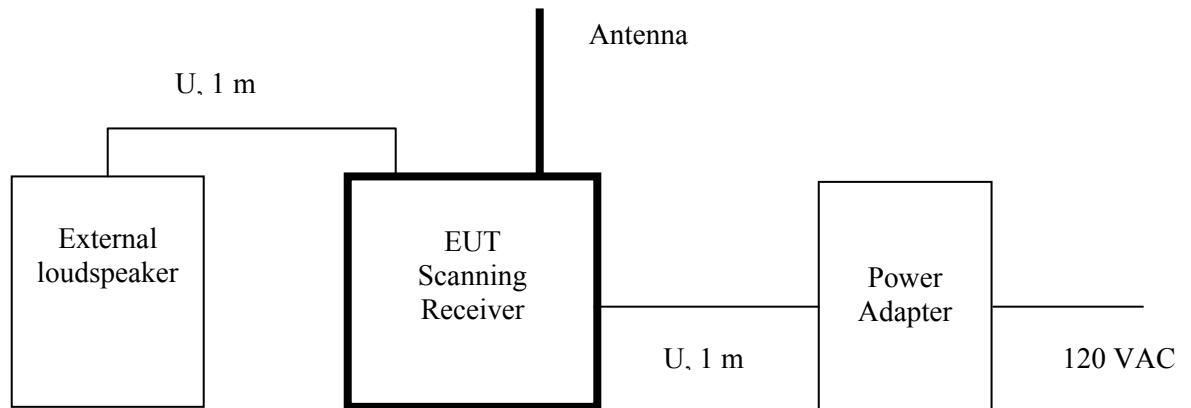

2.6 Equipment Modification

Any modifications installed previous to testing by GRE will be incorporated in each production model sold/leased in the United States.

Intertek Testing Services installed no modifications.

GRE, Model No: 20-526

FCC ID: ADV2000526

Date of Test: May 19, 2003

3.0 Emission Test Results

AC line conducted emission measurements were performed from 0.15 MHz to 30 MHz. Analyzer resolution is 10 kHz or greater.

Radiated emission measurements and antenna conducted emission measurements were performed from 30 MHz to 2000 MHz. Analyzer resolution is 100 kHz or greater for frequencies from 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

GRE, Model No: 20-526

FCC ID: ADV2000526

Date of Test: May 19, 2003

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG + DF$$

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(1/m)

AG = Amplifier Gain in dB

DF = Distance Factor in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

$$RA = 52.0 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DF = 0 \text{ dB}$$

$$FS = 52 + 7.4 + 1.6 - 29.0 + 0 = 32 \text{ dB}(\mu\text{V}/\text{m})$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V}/\text{m})/20] = 39.8 \mu\text{V}/\text{m}$$

GRE, Model No: 20-526
Date of Test: May 19, 2003
3.2 Radiated Emission Data

FCC ID: ADV2000526

Tested By:	Arkadi Kaplan
Test Date:	May 19, 2003

Temperature (°C)	21.5 ⁰ C
Relative Humidity (%)	45.0%

The results on the following page(s) were obtained when the device was tested in the condition described in Sections 2 and 3.

Results:	Complies by 12.2 dB at 1240 MHz (Tuned frequency 859.2 MHz)
-----------------	---

All other emissions are at least 10 dB below the limit.

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

Model: 20-526
Test Mode: Receiving
Test distance: 3 m

FCC Part 15.109 Class B Radiated Emissions Data

Tuned Frequency	L.O. Frequency	Antenna Polarization	SA Reading	Antenna Factor	Preamplifier gain	Cable Loss	Corrected Reading	Limit at 3 m	Margin
MHz	MHz	H/V	dB(uV)	dB(1/m)	dB	dB	dB(uV/m)	dB(uV/m)	dB
25.000	405.750	V	29.0	15.4	32.3	4.9	17.0	46.0	-29.0
40.000	420.750	V	31.7	15.8	32.3	4.9	20.1	46.0	-25.9
54.000	434.775	V	29.6	16.5	32.3	4.9	18.7	46.0	-27.3
108.000	488.775	V	27.9	17.2	32.4	4.9	17.6	46.0	-28.4
122.500	503.252	V	28.7	17.5	32.4	5.0	18.8	46.0	-27.2
136.988	517.724	V	28.7	17.6	32.4	5.1	19.0	46.0	-27.0
137.000	517.800	V	28.6	17.6	32.4	5.1	18.9	46.0	-27.1
154.528	535.275	V	28.5	17.3	32.4	5.1	18.5	46.0	-27.5
155.498	536.250	V	31.5	17.4	32.4	5.2	21.7	46.0	-24.3
174.000	554.775	V	30.3	18.1	32.5	5.2	21.1	46.0	-24.9
216.003	596.775	V	28.4	19.5	32.5	5.3	20.7	46.0	-25.3
220.503	601.275	V	25.2	19.0	32.5	5.3	17.0	46.0	-29.0
225.000	605.775	V	25.6	18.8	32.5	5.3	17.2	46.0	-28.8
406.000	786.750	V	31.9	20.7	32.5	5.6	25.7	46.0	-20.3
446.000	826.800	V	36.7	21.4	32.3	5.7	31.5	46.0	-14.5
512.000	892.800	V	34.9	22.7	32.0	5.8	31.4	46.0	-14.6
806.000	425.175	V	32.3	16.2	32.3	4.9	21.1	46.0	-24.9
860.000	479.175	V	29.0	16.7	32.4	5.0	18.3	46.0	-27.7
960.000	579.150	V	29.9	18.2	32.5	5.2	20.8	46.0	-25.2
1240.000	859.200	V	38.2	22.1	32.2	5.7	33.8	46.0	-12.2
1300.000	579.15	V	31.8	22.2	31.8	5.9	28.1	46.0	-17.9

- Notes:
1. Negative signs (-) in the Margin column signify levels below the limit.
 2. All readings below 1 GHz are quasi-peak, above 1 GHz – average.
 3. Cable Loss includes a 3dB external attenuator.
 4. All other readings not reported are at least 20 dB below the limit.
 5. For LO frequencies calculation, see Appendix B

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

3.3 AC Line Conducted Emission Data

Tested By:	Arkadi Kaplan
Test Date:	May 19, 2003



Temperature	(°C)	22.0 ⁰ C
Relative Humidity	(%)	45.5%



The results on the following page(s) were obtained when the device was tested in the condition described in Sections 2 and 3.

Results:	Complies by more than 15 dB
-----------------	------------------------------------

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

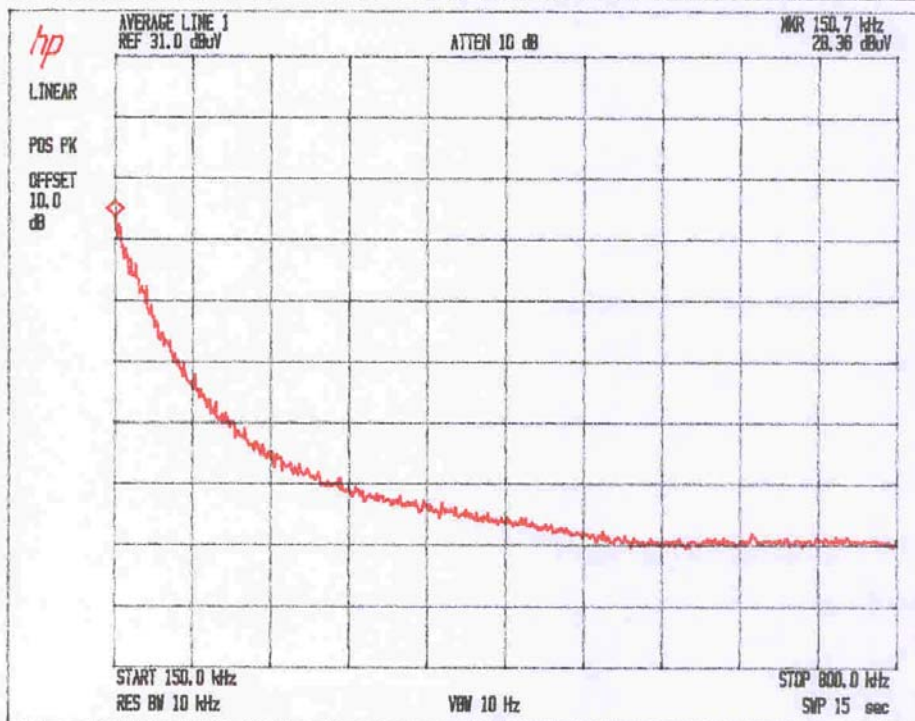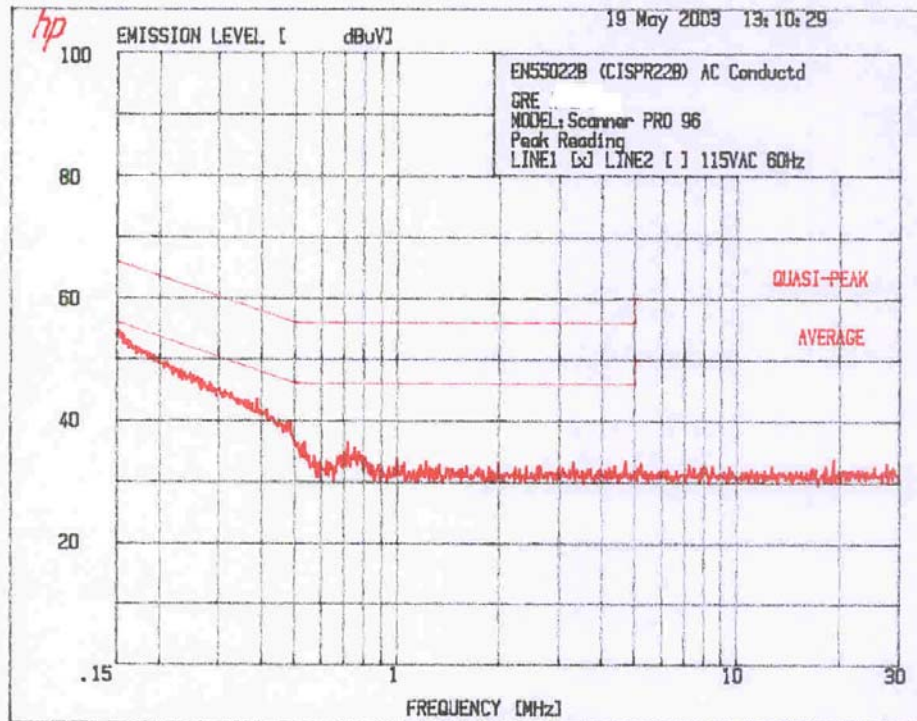

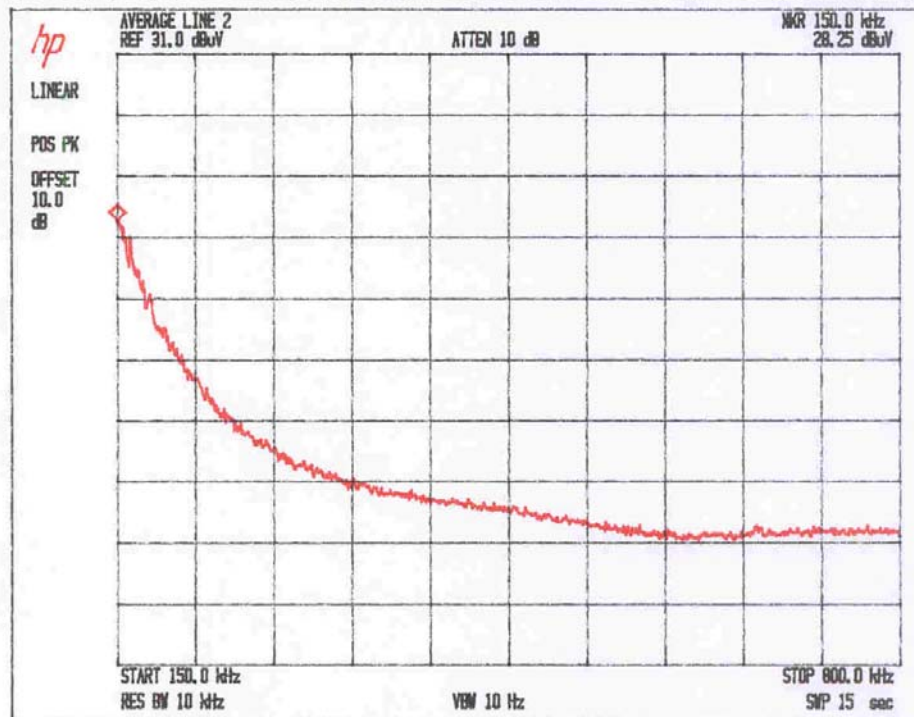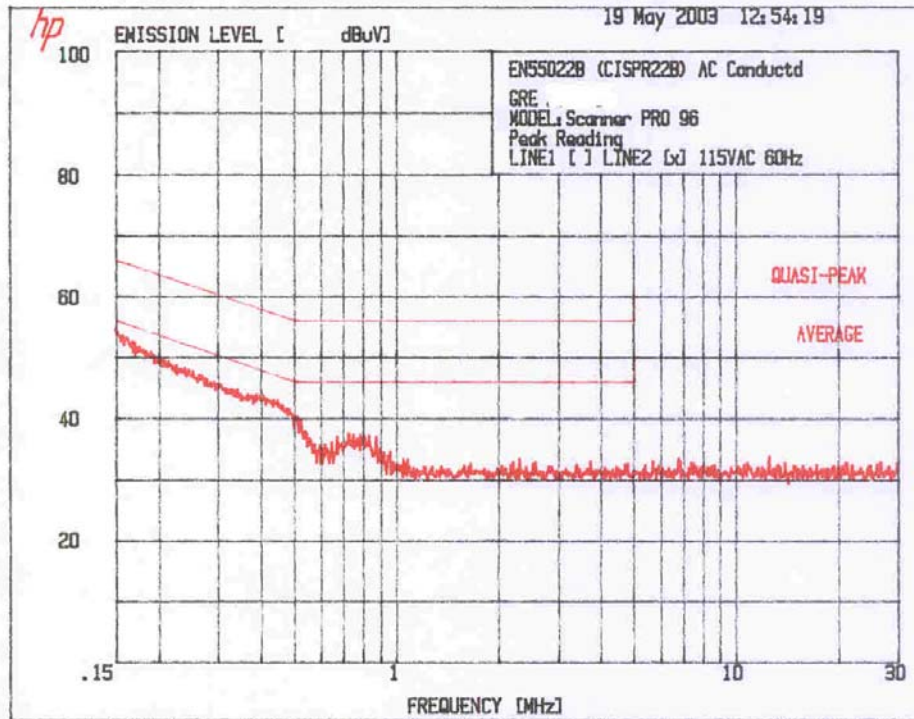

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526


3.4 Antenna Conducted Emission Data


Tested By:	Arkadi Kaplan
Test Date:	May 19, 2003

Temperature	(°C)	21.3 ⁰ C
Relative Humidity	(%)	45.0%

The results on the following page(s) were obtained when the device was tested in the condition described in Sections 2 and 3.

Results:	Complies by 9.0 dB
-----------------	---------------------------

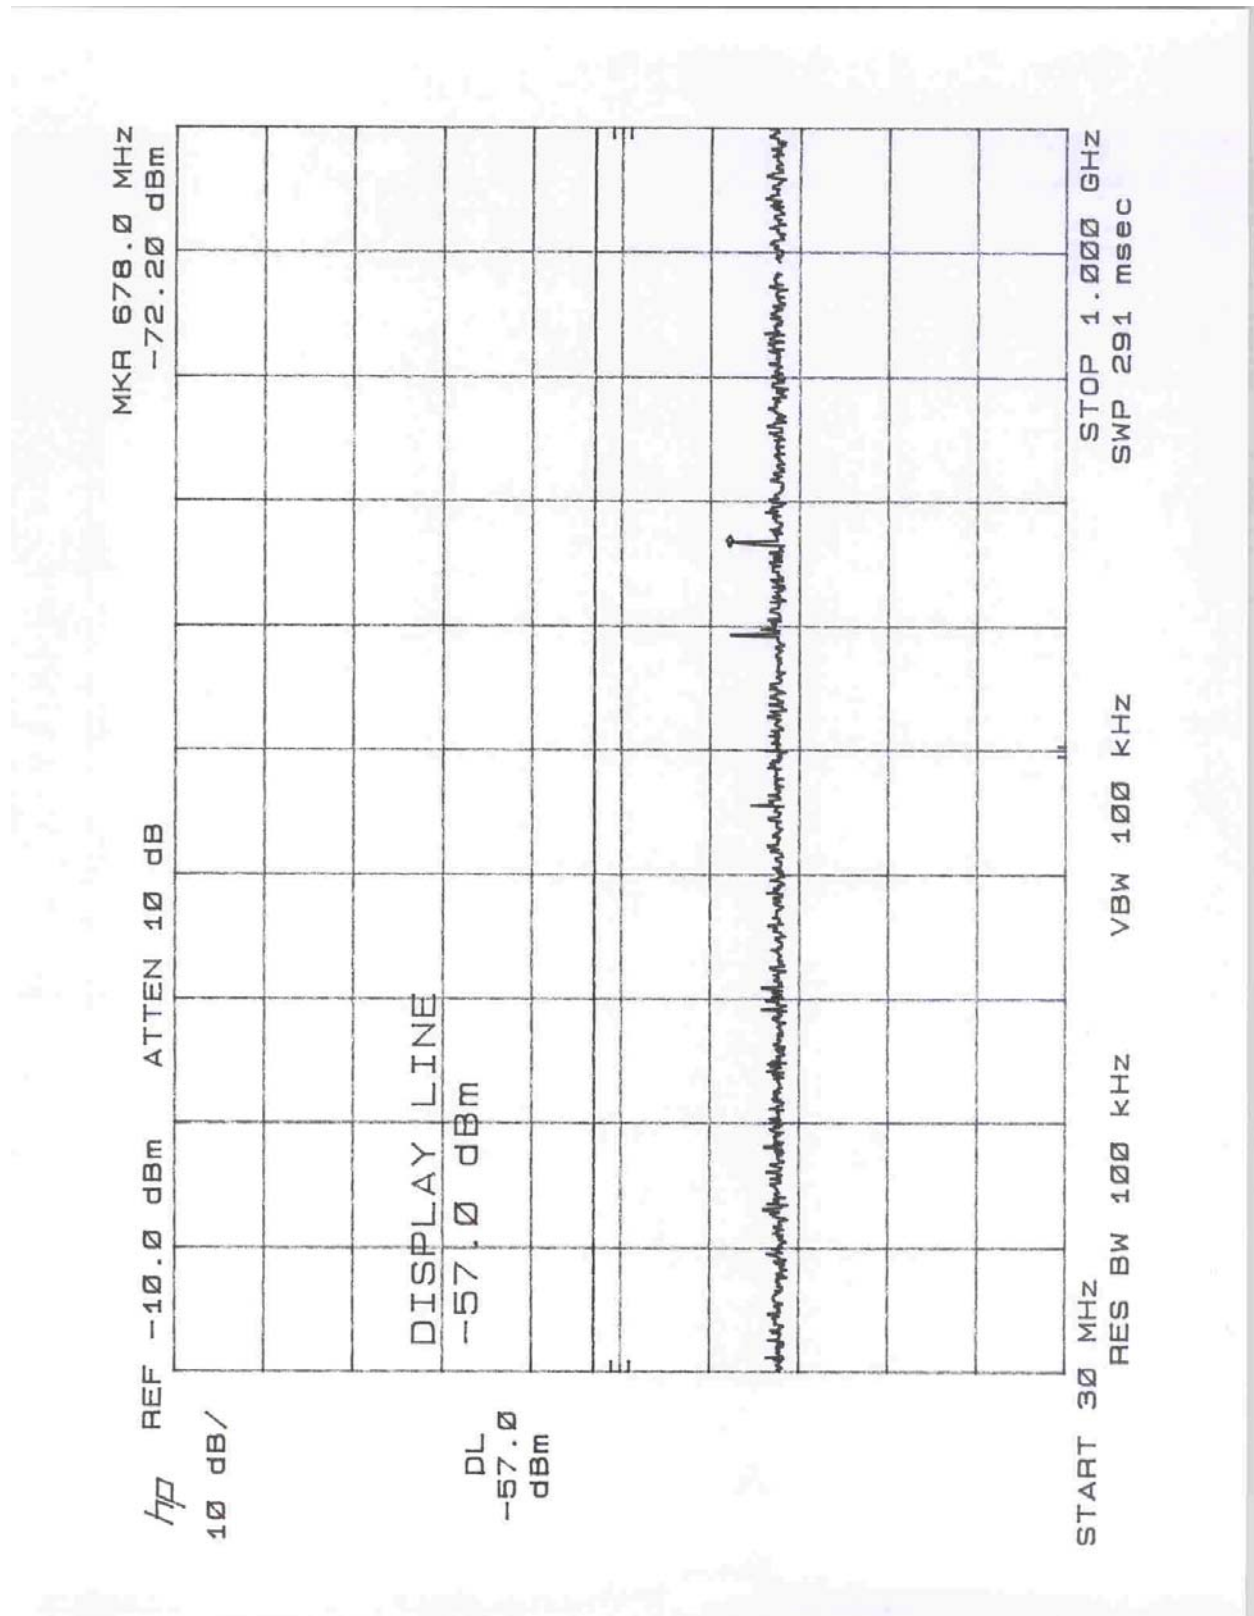

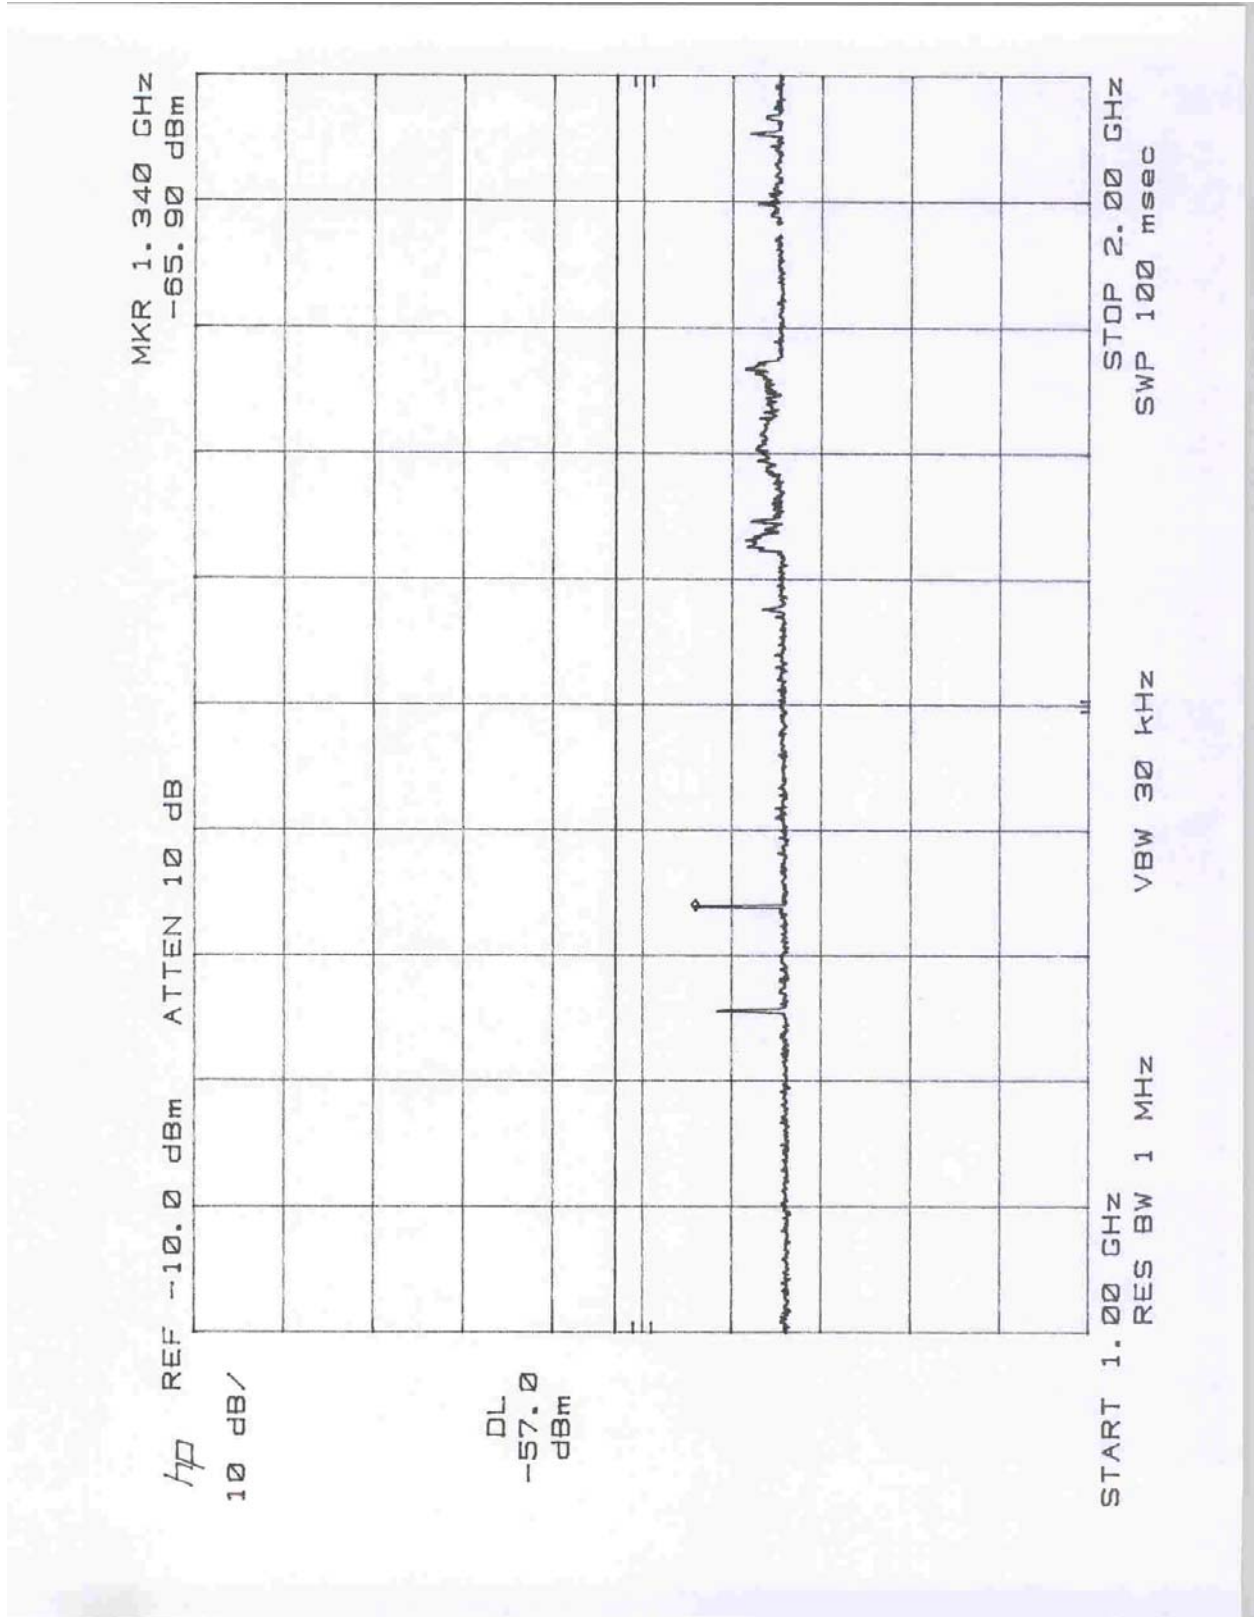

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

4.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list.

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
BI-Log Antenna	EMCO	3143	9509-1160	12	9/19/03
Horn Antenna	EMCO	3115	9170-3712	12	6/02/03
Pre-Amplifier	ITS	ITSPA-1	44156	12	9/16/03
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	7/16/03
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	7/16/03
Spectrum Analyzer w/8650 QP Adapter	Hewlett Packard	8568B	1912A0053 2521A01021	12	11/20/03
LISN	FCC	FCC-LISN-50-50-M-H	2011	12	2/08/04
Pulse Limiter	Hewlett Packard	11947A	2820A00184	12	9/03/03

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

Appendix A

GRE	GENERAL RESEARCH OF ELECTRONICS, INC.
Phone: +813-5439-3611	SHIBA NO.3 AMEREX BLDG
Fax: +813-5439-3644	No. 12-17 MITA 3-CHOME, MINATO-KU
	TOKYO, 108-0073, JAPAN
	Date: MAY 6, 2003
	Reference No. 03002
<u>SPECIFICATIONS</u>	
SUBJECT: 5,500 CHANNEL FREQUENCY MEMORIES WITH 16,500 ID MEMORIES, VHF/UHF PROGRAMMABLE AM/ FM-DIGITAL TRUNKING SCANNING RECEIVER PRO-96 CAT. NO. 20-526	
1. GENERAL	
1.1 Programmable channel	: 500 channels (50 channels x 10 banks) 1,500 ID memories (30 location x 5 sub-banks x 10 banks) 11 in 1 V-Scanner (500 channels x 11 folders with 1,500 channels x 11 folders) Total 5,500 channel frequency memories plus 16,500 ID memories 6 service search 1 limit search bank 1 priority channel 7 WX frequencies WX alert and SAME receiving with 10 FIPS (Federal Information Processing Standard) area code memories
1.2 Receiving mode	: AM, FM/APCO-25 Digital modulation, CTCSS, DCS, Motorola trunking/APCO-25 3,600 and 9,600 BPS Digital trunking, EDACS (GE/Ericsson/M/A-COM) trunking
1.3 Receiving system	: Triple conversion PLL superheterodyne 1 st IF 380.72750 MHz – 380.86875 MHz : The 1 st Local OSC frequency for VHF and UHF Low/T band employs upper side of receiving frequency range.
– Continued –	
PRODUCT DEVELOPMENT & MANUFACTURING	

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

: The 1st Local OSC frequency for UHF
High band employs lower side of receiving
frequency range.

2nd IF 21.4 MHz : The 2nd Local OSC frequency employs
lower side of 1st IF.

3rd IF 455 kHz : The 3rd Local OSC frequency employs
lower side of 2nd IF.

1.4 Frequency range	:	Freq.	Step	Mode (Default)
25.000 – 27.995 MHz			5 kHz	AM
28.000 – 54.000 MHz			5 kHz	FM
108.000 – 136.9875 MHz			12.5 kHz	AM
137.000 – 150.775 MHz			5 kHz	FM
150.7825 – 150.8125 MHz			7.5 kHz	FM
150.8150 – 154.4525 MHz			7.5 kHz	FM
154.45625 – 154.47875 MHz			7.5 kHz	FM
154.4825 – 154.5050 MHz			7.5 kHz	FM
154.5100 – 154.5250 MHz			5 kHz	FM
154.52750 – 154.54625 MHz			6.25 kHz	FM
154.5475 – 154.6075 MHz			7.5 kHz	FM
154.610 – 154.655 MHz			5 kHz	FM
154.6575 – 156.2475 MHz			7.5 kHz	FM
156.250 – 157.475 MHz			5 kHz	FM
157.4775 – 161.5650 MHz			7.5 kHz	FM
161.570 – 173.200 MHz			5 kHz	FM
173.20375 – 173.22250 MHz			6.25 kHz	FM
173.22500 – 173.38750 MHz			6.25 kHz	FM
173.39000 – 173.41500 MHz			6.25 kHz	FM
173.4200 – 174.000 MHz			5 kHz	FM
216.0025 – 221.9975 MHz			5 kHz	FM
222.000 – 225.000 MHz			5 kHz	FM
406.000 – 512.000 MHz			6.25 kHz	FM
806.000 – 960.000 MHz			6.25 kHz	FM
1240.000 – 1300.000 MHz			6.25 kHz	FM

Except cellular band: 824 – 848.9875 MHz and 869 – 893.9875 MHz

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

- 1.5 Preprogrammed band search: Marine
 - CB
 - FRS/GMRS/MURS
 - Fire/Police
 - Aircraft
 - Ham
- 1.6 WX frequencies : 162.400, 162.425, 162.450, 162.475, 162.500, 162.525, 162.550 MHz
- 1.7 Scanning rate : 60 channels/sec.
- 1.8 Search rate : 75 steps/sec.
- 1.9 Display : LED back-lighted LCD with 12 characters 4 lines
- 1.10 Zeromatic : Activates during search mode
- 1.11 Audio output : 250m Watts maximum
- 1.12 Speaker : Built-in 36 mm 8 Ohms dynamic speaker
- 1.13 Operating voltage : DC 6 Volts, 4 "AA" cells
- 1.14 Ext. power and charge voltage: DC 9 Volts (none regulated)
- 1.15 Dimension : Approx. 62 (W) x 41 (D) x 157 (H) mm
- 1.16 Weight : Approx. 250 g without antenna and batteries
- 1.17 Accessory : Rubber antenna, Owner's manual, Frequency guide, Normal battery holder, Rechargeable battery holder and Attached belt clip
- 1.18 Memory backup : No battery back-up required, EEPROM and Flash memory used
- 1.19 Drop test : In Gift-Box, Height 76 cm
Out of Carton, Height 50 cm

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

2. ELECTRICAL

Standard Test Condition

- | | | |
|-----------------------------|---|----------------------|
| (1) Power source voltage | : | 6 Volts DC (Battery) |
| (2) Antenna impedance | : | 50 Ohms |
| (3) Test temperature | : | 18 – 35 degrees C |
| (4) Standard signal level | : | 100 μ V |
| (5) Modulation frequency | : | 1 kHz |
| (6) Reference FM deviation | : | 3.0 kHz |
| (7) Reference AM modulation | : | 60 % |
| (8) Reference audio output | : | 75 m Watts |
| (9) Audio output load | : | 8 Ohm resistive load |

		Nominal	Limit
2.1	Frequency range		
	VHF Low		25 – 54 MHz
	VHF Aircraft		108 – 136.9875 MHz
	VHF High		137 – 174 MHz
			216.0025 – 225.000 MHz
	UHF Low		406 – 512 MHz
	UHF High		806 – 960 MHz
			1240 – 1300 MHz

Except cellular band: 824.000 – 848.9875 MHz and 869.000 – 893.9875 MHz

2.2	Sensitivity	:	VHF Low	0.3 μ V	1 μ V
	FM: (S+N)/N = 20 dB		VHF Aircraft	0.3 μ V	1 μ V
	Dev.: 3 kHz at 1 kHz		VHF High	0.5 μ V	2 μ V
			UHF Low/T	0.5 μ V	2 μ V
			UHF High 806 – 960 MHz	0.7 μ V	3 μ V
			1240 – 1300 MHz	0.7 μ V	4 μ V
	AM: (S+N)/N = 20 dB	:	VHF Low	1 μ V	3 μ V
	Mod.: 60% at 1 kHz		VHF Aircraft	1 μ V	3 μ V
			VHF High	1.5 μ V	5 μ V
			UHF Low/T	2 μ V	6 μ V
			UHF High 806 – 960 MHz	2 μ V	6 μ V
			1240 – 1300 MHz	3 μ V	12 μ V

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.		Ref. No. 03002	
		Nominal	Limit
2.3	Data decode sensitivity		
	CT : CTCSS 350 Hz Dev. at 41, 174, 450, 860 MHz	1 μ V	3 μ V
	DC : DCS 350 Hz Dev. at 41, 174, 450, 860 MHz	1 μ V	3 μ V
	ED : ED (GE/Ericsson/M/A-COM) 4 kHz Dev. at 174, 450, 860 MHz	1 μ V	4 μ V
	MO (Voice channel) : MO (Motorola) 350 Hz Dev. at 174, 450, 860 MHz	0.5 μ V	3 μ V
	MO (Control channel) : MO (Motorola) 4 kHz Dev. at 174, 450, 860 MHz	1 μ V	4 μ V
	WX Alert 1050 Hz tone : 3 kHz Dev. at 162.4 MHz	0.3 μ V	1 μ V
	WX SAME : 4 kHz Dev. at 162.4 MHz	0.5 μ V	2 μ V
2.4	WX alert tone decode range : 4 kHz Dev. 2 μ V at 162.400 MHz	1050 \pm 25 Hz	\pm 40 Hz
2.5	WX alert tone checking time : 4 kHz Dev. 2 μ V at 162.400 MHz	2.2 sec.	2 – 5 sec.
	Note: When receiving WX alert in priority operation, the priority sampling time up to 2 sec. is added to this depending on Alert tone transmission timing.		
2.6	WX alert sound level at 1 ft. :	70 dBSPL	60 dBSPL
2.7	Image ratio 1 st IF image : VHF Low at 41 MHz	60 dB	50 dB
	VHF Aircraft at 124 MHz	60 dB	50 dB
	VHF High at 174 MHz	50 dB	35 dB
	UHF Low/T at 450 MHz	55 dB	45 dB
	UHF High at 860 MHz	90 dB	80 dB
	1270 MHz	50 dB	35 dB
	2 nd IF image : VHF High at 174 MHz	50 dB	40 dB

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.			Ref. No. 03002	
			Nominal	Limit
2.8	Attenuator	: VHF Low	20 dB	17 – 24 dB
		: VHF Aircraft	20 dB	17 – 24 dB
		: VHF High	20 dB	17 – 24 dB
		: UHF Low	15 dB	10 – 20 dB
		: UHF High	13 dB	8 – 18 dB
2.9	Squelch sensitivity (Band center)			
	Threshold	: AM/FM	0.5 μ V	2 μ V
	Tight: (S+N)/N	: AM	20 dB	10 dB
		: FM	25 dB	15 dB
2.10	Selectivity			
	AM 25 – 27.995 MHz	: -6 dB	± 5 kHz	± 7 kHz
		: -50 dB	± 6 kHz	± 10 kHz
	Other frequency	: -6 dB	± 8 kHz	± 12 kHz
		: -50 dB	± 14 kHz	± 17.5 kHz
2.11	Spurious rejection (Except Primary image)	: VHF High at 174 MHz	40 dB	30 dB
2.12	IF rejection	: 380.8 MHz at 174 MHz	60 dB	40 dB
		: 21.4 MHz at 174 MHz	100 dB	80 dB
2.13	Acceptable radio frequency displacement at EIA RS-204D		± 6 kHz	± 3 kHz
2.14	Signal to noise ratio	: 25 – 54 MHz	40 dB	30 dB
	AM/FM	108 – 136.9875 MHz	40 dB	30 dB
	RF: 100 μ V	137 – 174 MHz	40 dB	30 dB
	Dev.: 3 kHz at 1 kHz	216.0025 – 225 MHz	40 dB	30 dB
	Mod. 60% at 1 kHz	406 – 512 MHz	35 dB	25 dB
		806 – 960 MHz	35 dB	25 Db
		1240 – 1300 MHz	35 dB	25 dB
2.15	Residual noise Vol. min. and Squelched		1 mV	3 mV
2.16	Scanning rate without trunking:		60 ch/sec.	33 – 66 ch/sec.

- 6 -

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

		Nominal	Limit
2.17 Search rate (Receiving mode FM)	: at 162.25 – 164.25 MHz	75 steps/sec.	60 – 85 steps/sec.
2.18 Scan and Search delay time	:	2 sec.	1 – 3 sec.
2.19 Audio output (T.H.D. 10 %)	: RF input: 100 μ V at 174 MHz 8 Ohms R Load, 1 kHz	170 m Watts	140 m Watts
2.20 T.H.D. at 50 m Watt	: RF input: 100 μ V at 174 MHz	1 %	5 %
2.21 Audio max. power	: RF input: 100 μ V at 174 MHz 8 Ohm internal speaker 32 Ohm at headphone mono/stereo (each phone)	250 m Watts 17m/12.5m Watts	200 m Watts 25m/25m Watts
2.22 Audio frequency response at –6 dB	: RF input: 100 μ V at 174 MHz 300 Hz 2.0 kHz	200 – 400 Hz 1.5 – 3.0 kHz	
2.23 Intermediate frequency	: 1 st 380.72750 – 380.86875 MHz 2 nd 21.4 MHz 3 rd 455 kHz		
2.24 Current drain at 9 Volts	: Vol. Max. 8 Ohm internal speaker at 174 MHz	220 mA 130 mA	260 mA 150 mA
2.25 Charging current Ni-MH Battery (1800 mA/h)			
1) AC adapter charging current	:	150 mA	100 – 200 mA
Note: This specification is obtained AC 120 V with model 273-1767A without the scanner on after ten hours.			
2) DC adapter (regulated) charging current (at 9 V)	:	150 mA	130 – 170 mA
Note: This specification is obtained DC 9 V without the scanner on after ten hours.			

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

		Nominal	Limit
2.26	Battery life at continuous operation		
	Alkaline battery :	12 Hours	Not specified
	Ni-MH battery (1600 mA/h)	10 Hours	Not specified
	Note: Test condition: EIAJ CP-2905 (1-4-4.1)		
2.27	Birdies and step frequency : Under discussion when search		
2.28	Filters : Saw filter for 380.8 MHz (1 st IF), Monolithic crystal filter for 21.4 MHz (2 nd IF) and Ceramic filters for 455 kHz (3 rd IF)		
2.29	Antenna impedance : 50 Ohms		
2.30	Low BATT indicator :	4.0 V	3.8 – 4.3 V
2.31	Temperature range : Test to specification between: +18°C – +35°C Operate (Need not meet spec.): -10°C – +60°C		

3. OPERATING CONTROLS AND CONNECTIONS

- 3.1 Volume control with power switch
- 3.2 Squelch control
- 3.3 Keyboard (30 keys): FUNCTION, PGM, WX, TRUNK, MANual, PRI, TUNE, TEXT, ATT, PAUSE,
MODE, ▲, ▼, KEY LOCK/LighT, SCAN, SEARCH, L/OUT, ENTER,
CLR, 1, ABC/2, DEF/3, GHI/4, JKL/5, MNO/6, PQRS/7, TUV/8, WXYZ/9, 0,
• and DELAY
- 3.4 LCD display: 12 characters and 4 lines
Frequency, Mode, ch, Bank, Etc.
- 3.5 BNC type antenna connector
- 3.6 Earphone jack (D = 3.5 mm stereo)
- 3.7 External power jack and charge jack (type – "C")

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

- 3.8 PC Interface and Clone jack (D = 35 mm mono)
- 3.9 Battery compartment
- 3.10 Reset switch

4. FEATURES

- 4.1 The scanner can receiving Phase 1 APCO-25 C4FM/IMBE digital voice modulation
- 4.2 10 bank and 500 channel memories for trunking bank and channel combined with conventional mode
- 4.3 Scan both trunking and conventional channels at same time
- 4.4 V-Scanner Folders – Eleven 500 channel virtual scanner folders, total 5, 500 channels
- 4.5 1,500 ID memories in 10 ID banks, 5 sub-ID memories in each bank and each sub-ID memory has 30 ID locations. (V-Scanner Folders, Total 16,500 ID memories)
- 4.6 The scanner can receive Motorola APCO-25 digital trunking system of 3,600 and 9,600 BPS CC.
- 4.7 The scanner can receive Motorola VHF and UHF (Type I/II) trunking system.
- 4.8 The scanner can receive VHF and UHF EDACS trunking system.
- 4.9 The scanner can receive CTCSS and DCS data.
- 4.10 Alphanumeric data entry and display
- 4.11 Clone the memory to other unit (Use 20-289 PC cable)
- 4.12 Pre-programmed Marine, CB, FRS/GMRS/MURS, Fire/Police, Aircraft, Ham and Weather frequencies
- 4.13 WX alert (1050 Hz tone) and SAME (Specific Area Message Encoding) system receive
- 4.14 Attenuator control (Normal attenuator and Global attenuator)
- 4.15 Built-in power save circuit
- 4.16 Frequency tune mode (Frequency ▲ or ▼)
- 4.17 "Zeromatic" tuning system

- 9 -

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

GENERAL RESEARCH OF ELECTRONICS, INC.

Ref. No. 03002

- 4.18 Change the direction at the searching by ▲ (up) or ▼ (down)
- 4.19 60 channels/sec. Scanning rate and 75 steps/sec. Searching rate
- 4.20 2 second scan and search delay
- 4.21 Manual selection for channel
- 4.22 Scan mode [Cleared channels (000.000 freq.) are not scan.]
- 4.23 Deleting a frequency from a channel
- 4.24 1 limit search bank
- 4.25 Key lock for safety
- 4.26 Key tone and alert tone
- 4.27 12 characters and 4 lines dot matrix LCD (Indicate channel numbers, Frequency, ID number and the data on the LCD)
- 4.28 LCD and keyboard backlighting
- 4.29 LCD contrast control
- 4.30 Low battery indicator by LCD and Tone
- 4.31 Regulated DC power supply circuit
- 4.32 Built-in dynamic speaker
- 4.33 Crystal filter for 2nd IF and Ceramic filters for 3rd IF section
- 4.34 Belt clip and Rechargeable battery holder
- 4.35 50 lock out frequencies per search bank, Fire/Police, Aircraft, Ham, Limit search (Totaling 200 frequencies.)
- 4.36 Frequency lock-out review
- 4.37 Channel lock-out and channel lock-out review

GENERAL RESEARCH OF ELECTRONICS, INC.

- 10 -

GRE, Model No: 20-526
Date of Test: May 19, 2003
Appendix B

FCC ID: ADV2000526

MODEL NO. 20-526

1 LOCAL OSC FREQUENCY CALCULATION

-1 MODEL NO. 20-526 formula for 1st, 2nd and 3rd Local oscillation frequencies are as follow :

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL XTAL (MHz)
VHF Low	5.0	25.0000 ~ 54.0000	$A = (FR + 380.800) / 0.075$ $= A.xxx \text{ (Cut away decimal)}$ $1st \text{ Local} = A \times 0.075$ $1st \text{ IF} = 1st \text{ Local} - FR$	2nd Local = 1st IF - 21.4	20.9450
VHF High	12.5	108.0000 ~ 136.9875		2nd Local = 1st IF - 21.4	20.9450
	5.0	137.0000 ~ 150.7750		"	"
"	7.5	150.7825 ~ 150.8125		2nd Local = 1st IF - 21.4025	20.9475
"	"	150.8150 ~ 154.4525		2nd Local = 1st IF - 21.4	20.9450
"	"	154.45625 ~ 154.47875		"	"
"	"	154.4825 ~ 154.5050		"	"
"	5.0	154.5100 ~ 154.5250		"	"
"	6.25	154.52750 ~ 154.54625		2nd Local = 1st IF - 21.3975	20.9425
"	7.5	154.5475 ~ 154.6075		2nd Local = 1st IF - 21.4025	20.9475
"	5.0	154.6100 ~ 154.6550		2nd Local = 1st IF - 21.4	20.9450
"	7.5	154.6575 ~ 156.2475		2nd Local = 1st IF - 21.3975	20.9425
"	5.0	156.2500 ~ 157.4750		2nd Local = 1st IF - 21.4	20.9450
"	7.5	157.4775 ~ 161.5650		2nd Local = 1st IF - 21.3975	20.9425
"	5.0	161.5700 ~ 173.2000		2nd Local = 1st IF - 21.4	20.9450
"	6.25	173.20375 ~ 173.22250		2nd Local = 1st IF - 21.4025	20.9475
"	"	173.22500 ~ 173.38750		2nd Local = 1st IF - 21.4	20.9450
"	"	173.39000 ~ 173.41500		2nd Local = 1st IF - 21.3975	20.9425
"	5.0	173.4200 ~ 174.0000		2nd Local = 1st IF - 21.4	20.9450
"	"	216.0025 ~ 221.9975		2nd Local = 1st IF - 21.4025	20.9475
"	"	222.0000 ~ 225.0000		2nd Local = 1st IF - 21.4	20.9450
UHF Low	6.25	406.0000 ~ 512.0000	$A = (FR - 380.800) / 0.075$ $= A.xxx \text{ (Cut away decimal)}$ $1st \text{ Local} = A \times 0.075$ $1st \text{ IF} = FR - 1st \text{ Local}$	2nd Local = 1st IF - 21.4	20.9450
UHF High	6.25	806.0000 ~ 823.9875		2nd Local = 1st IF - 21.4	20.9450
"	"	849.0000 ~ 868.9875		"	"
"	"	894.0000 ~ 960.0000		"	"
"	"	1240.0000 ~ 1300.0000		"	"

RF DENOTES Frequency Received.

-2 IF FREQUENCY

1st IF : 380.7300 ~ 380.850MHz
 2nd IF : 21.3975MHz / 21.4000MHz / 21.4025MHz
 3rd IF : 455kHz

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

-3 Example

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOCAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOCAL PLL 2 /VCO 3 (MHz)	3rd LOCAL X' TAL (MHz)
VHF Low	5.0	25.0000	A : $5410.666 = (25.0000 + 380.800) / 0.075$ = 5410.666 (Cut away decimal) 1st Local : $405.750 = 5410 \times 0.075$ 1st IF : $380.750 = 405.750 - 25.0000$	$359.350 = 380.750 - 21.4$	20.9450
		40.0000	$5610.666 = (40.0000 + 380.800) / 0.075$ = 5610.666 (Cut away decimal) $420.750 = 5610 \times 0.075$ $380.750 = 420.750 - 40.0000$	$359.350 = 380.750 - 21.4$	20.9450
		54.0000	$5797.333 = (54.0000 + 380.800) / 0.075$ = 5797.333 (Cut away decimal) $434.775 = 5797 \times 0.075$ $380.775 = 434.775 - 54.0000$	$359.375 = 380.775 - 21.4$	20.9450
VHF High	12.5	108.0000	$6517.333 = (108.0000 + 380.800) / 0.075$ = 6517.333 (Cut away decimal) $488.775 = 6517 \times 0.075$ $380.775 = 488.775 - 108.0000$	$359.375 = 380.775 - 21.4$	20.9450
	6.25	154.5275	$7137.7 = (154.5275 + 380.800) / 0.075$ = 7137.7 (Cut away decimal) $535.275 = 7137 \times 0.075$ $380.7475 = 535.275 - 154.5275$	$359.350 = 380.7475 - 21.3975$	20.9425
	5.0	174.0000	$7397.333 = (174.0000 + 380.800) / 0.075$ = 7397.333 (Cut away decimal) $554.775 = 7397 \times 0.075$ $380.775 = 554.775 - 174.0000$	$359.375 = 380.775 - 21.4$	20.9450
	5.0	216.0025	$7957.366 = (216.0025 + 380.800) / 0.075$ = 7957.366 (Cut away decimal) $596.775 = 7957 \times 0.075$ $380.7725 = 596.775 - 216.0025$	$359.370 = 380.7725 - 21.4025$	20.9475
	5.0	225.0000	$8077.333 = (225.0000 + 380.800) / 0.075$ = 8077.333 (Cut away decimal) $605.775 = 8077 \times 0.075$ $380.775 = 605.775 - 225.0000$	$359.375 = 380.775 - 21.4$	20.9450

GRE, Model No: 20-526
Date of Test: May 19, 2003

FCC ID: ADV2000526

RECEIVING BAND (FR STEP)	FREQ. STEP (kHz)	RECEIVING FREQ. FR (MHz)	1st LOGAL PLL 1 /VCO 1 or VCO 2 (MHz)	2nd LOGAL PLL 2 /VCO 3 (MHz)	3rd LOGAL X' TAL (MHz)
UHF Low	6.25	406.0000	$10490.666 = (406.0000 + 380.800) / 0.075$ $= 10490.666$ (Cut away decimal) $786.750 = 10490 \times 0.075$ $380.750 = 786.750 - 406.0000$	$359.350 = 380.750 - 21.4$	20.9450
		446.0000	$11024.000 = (446.0000 + 380.800) / 0.075$ $= 11024.000$ (Cut away decimal) $826.800 = 11024 \times 0.075$ $380.800 = 826.800 - 446.0000$	$359.400 = 380.800 - 21.4$	20.9450
		512.0000	$11904.000 = (512.0000 + 380.800) / 0.075$ $= 11904.000$ (Cut away decimal) $892.800 = 11904 \times 0.075$ $380.800 = 892.800 - 512.0000$	$359.400 = 380.800 - 21.4$	20.9450
UHF High	6.25	806.0000	$5669.333 = (806.0000 - 380.800) / 0.075$ $= 5669.333$ (Cut away decimal) $425.175 = 5669 \times 0.075$ $380.825 = 806.000 - 425.175$	$359.425 = 380.825 - 21.4$	20.9450
		860.0000	$6389.333 = (860.0000 - 380.800) / 0.075$ $= 6389.333$ (Cut away decimal) $479.175 = 6389 \times 0.075$ $380.825 = 860.000 - 479.175$	$359.425 = 380.825 - 21.4$	20.9450
		960.0000	$7722.666 = (960.0000 - 380.800) / 0.075$ $= 7722.666$ (Cut away decimal) $579.150 = 7722 \times 0.075$ $380.850 = 960.000 - 579.150$	$359.450 = 380.850 - 21.4$	20.9450
		1240.0000	$11456.000 = (1240.0000 - 380.800) / 0.075$ $= 11456.000$ (Cut away decimal) $859.200 = 11456 \times 0.075$ $380.800 = 1240.000 - 859.200$	$359.400 = 380.800 - 21.4$	20.9450
		1300.0000	$12256.000 = (1300.0000 - 380.800) / 0.075$ $= 12256.000$ (Cut away decimal) $919.200 = 12256 \times 0.075$ $380.800 = 1300.000 - 919.200$	$359.400 = 380.800 - 21.4$	20.9450