



FCC TCB & ISED CB



0685



91038



1309



46390-2049



AT-1945



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

March 27, 2019

Ultratech Engineering Labs, Inc.

3000 Bristol Circle
Oakville, Ontario
L6H 6G4

Subject: Certification Application under FCC 47 CFR, Parts 2 and 87 (Subpart D) - Non-broadcast Aviation Radio Services Operating in the Frequency Band 118-136.99166 MHz.

Applicant: ICOM Incorporated
Product: VHF Air Band Transceiver
Models: IC-A25C/N
FCC ID: AFJ369910

Dear Sir/Madam:

As appointed agent for **ICOM Incorporated**, we submit this application for FCC certification the above product. Please review all files uploaded to your electronic filing site.

If you have any queries, please do not hesitate to contact us.

Yours truly,

Santhosh Fernandez

Santhosh Fernandez
Authorized Agent



FCC TCB & ISED CB



0685



91038



1309



46390-2049



AT-1945



SL2-IN-E-1119R



Korea KCC-RRL
CA2049

3000 Bristol Circle,
Oakville, Ontario,
Canada L6H 6G4

Tel.: (905) 829-1570
Fax.: (905) 829-8050

Website: www.ultratech-labs.com
Email: vic@ultratech-labs.com

March 27, 2019

Icom America, Inc.
2380 116th Ave. N.E.
Bellevue, Washington
USA, 98004

Attn.: Mr. Masaaki Takahashi

Subject: Certificaiton Application in accordance with FCC CFR 47, Parts 2 and 87 (Subpart D) - Non-broadcast Aviation Radio Services Operating in the Frequency Band 118-136.99166 MHz.

Product: VHF Air Band Transceiver
Models: IC-A25C/N
FCC ID: AFJ369910

Dear Mr. Takahashi,

The product sample has been tested in accordance with **FCC CFR 47, Parts 2 and 87 (Subpart D) - Non-broadcast Aviation Radio Services Operating in the frequency band 118-136.9917 MHz**, and the results and observation were recorded in the engineering report, Our File No.: 19ICOM509_FCC87


Enclosed you will find copy of the engineering report. If you have any queries, please do not hesitate to contact us.

Yours truly,

Tri Minh Luu, BAsC,
Vice President - Engineering

Encl.

ENGINEERING TEST REPORT



VHF Air Band Transceiver

Model Nos.: IC-A25C/N

FCC ID: AFJ369910

Applicant:

ICOM Incorporated

1-1-32, Kamiminami, Hirano-ku
Osaka, Japan, 547-0003

Tested in Accordance with

**Federal Communications Commission (FCC)
47 CFR, Parts 2 and 87 (Subpart D) – Aviation Services**

UltraTech's File No.: 19ICOM509_FCC87

This Test report is Issued under the Authority of
Tri M. Luu, BASc
Vice President of Engineering
UltraTech Group of Labs

Date: March 27, 2019

Report Prepared by: Santhosh Fernandez

Tested by: Nimisha Desai

Issued Date: March 27, 2019

Test Dates: March 18-22, 2019

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



91038



1309



46390-2049



AT-1945



SL2-IN-E-
1119R



Korea
KCC-RRA

CA2049

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	3
1.1. SCOPE	3
1.2. RELATED SUBMITTAL(S)/GRANT(S)	3
1.3. NORMATIVE REFERENCES	3
EXHIBIT 2. PERFORMANCE ASSESSMENT	4
2.1. CLIENT INFORMATION	4
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION	4
2.3. EUT'S TECHNICAL SPECIFICATIONS	5
2.4. LIST OF EUT'S PORTS	5
EXHIBIT 3. EUT OPERATING CONDITION AND CONFIGURATIONS DURING TESTS	6
3.1. CLIMATE TEST CONDITIONS	6
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS	6
EXHIBIT 4. SUMMARY OF TEST RESULTS	7
4.1. LOCATION OF TESTS	7
4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS	7
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES	7
4.4. DEVIATION OF STANDARD TEST PROCEDURES	7
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	8
5.1. TEST PROCEDURES	8
5.2. MEASUREMENT UNCERTAINTIES	8
5.3. MEASUREMENT EQUIPMENT USED	8
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER	8
5.5. RF POWER OUTPUT [§§ 2.1046 & 87.131]	9
5.6. OCCUPIED BANDWIDTH AND EMISSION LIMITATIONS [§§ 2.1049, 87.135 & 87.139]	10
5.7. MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE [§§ 2.1047(A) & 87.141(A)]	23
5.8. MODULATION CHARACTERISTICS – MODULATION LIMITING [§§ 2.1047(B) & 87.141]	28
5.9. FIELD STRENGTH OF SPURIOUS EMISSIONS [§§ 2.1053, 87.139]	33
5.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051, 87.139]	35
5.11. FREQUENCY STABILITY [§§ 2.1055 & 87.133]	41
EXHIBIT 6. TEST SETUP AND EQUIPMENT LIST	42
6.1. CONDUCTED POWER	42
6.2. MODULATION LIMIT	43
6.3. AUDIO FREQUENCY RESPONSE	44
6.4. 99% OBW AND MASK	45
6.5. TX CONDUCTED EMISSION	46
6.6. RX CONDUCTED EMISSION	47
6.7. TX RADIATED	48
6.8. RX RADIATED	49
6.9. FREQUENCY STABILITY	50
EXHIBIT 7. MEASUREMENT UNCERTAINTY	51
7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY	51

EXHIBIT 8. MEASUREMENT METHODS..... 52

8.1. CONDUCTED POWER MEASUREMENTS 52

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD 53

8.3. FREQUENCY STABILITY 56

8.4. EMISSION LIMITATIONS..... 57

8.5. SPURIOUS EMISSIONS (CONDUCTED)..... 57

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2 and 87
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2 & 87
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the frequency band 118-136.99166 MHz
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603-E – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2018	Code of Federal Regulations – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
TIA/EIA 603, Edition E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

Brand Name:	ICOM Incorporated
Product Name:	VHF Air Band Transceiver
Model Name or Number:	IC-A25N
Serial Number:	00000501
Power Supply Requirement:	7.2VDC Standard, 11Vdc at Ext DC Jack
Transmitting/Receiving Antenna Type:	Non-integral
Type of Equipment:	Non-broadcast Radio Communication Equipment
Primary User Functions of EUT:	VHF air band transceiver for voice communication in Occupational environment.

2.3. EUT’S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Commercial, industrial or business environment
Power Supply Requirement:	7.2Vdc Standard, 11.0Vdc at EXT DC-JACK
RF Output Power Rating:	1.8 W (CW) Conducted; 6.0W (PEP)
Operating Frequency Range:	118.00-136.99166 MHz
RF Output Impedance:	50 Ω
Channel Spacing:	25.0 kHz, 8.33 kHz
Emission Designation*:	6K00A3E, 5K60A3E
Antenna Connector Type:	BNC

* For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:

Calculation of Necessary Bandwidth for Telephony (Commercial Quality)

Telephony, double-sideband (single channel):

$B_n = 2M$

Where: B_n = Necessary bandwidth in hertz
 M = Maximum modulation frequency in hertz

$M = 3000\text{Hz}$

$B_n = 2(3000) = 6000 \text{ Hz} = 6.00 \text{ KHz}$

2.4. LIST OF EUT’S PORTS

Port Number	EUT’s Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	Antenna	1	BNC	Shielded
2	Speaker Microphone	1	2.5mm & 3.5mm	Non-Shielded
3	DC Power Jack	1	3.5mm DC jack	Non-Shielded

EXHIBIT 3. EUT OPERATING CONDITION AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C - 24°C
Humidity:	30% - 57%
Pressure:	102 kPa
Power input source:	7.2Vdc

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	Test jig was provided by the manufacturer.
Transmitter Test Antenna:	The EUT is tested with the transmitter antenna port terminated to a 50 Ω Load.

Transmitter Test Signals	
Frequency Band(s):	118.00-136.99166 MHz
Test Frequency(ies): (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	118.010 127.505 and 136.990 MHz (8.33kHz Ch Spacing) 118.025, 127.500 and 136.975 MHz (25 kHz Ch Spacing)
Transmitter Wanted Output Test Signals:	
▪ RF Power Output (Rated output power):	1.8 W
▪ Normal Test Modulation:	AM or 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation
▪ Modulating signal source:	External

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

FCC Section(s)	Test Requirements	Applicability (Yes/No)
2.1046 & 87.131	RF Power Output	Yes
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes, Refer to SAR Report.
2.1047(a) & 87.141(f)	Modulation Characteristics - Audio Frequency Response of Low-pass Filter	Yes
2.1047(b) & 87.141	Modulation Characteristics - Modulation Limiting	Yes
2.1049, 87.135, 87.137 & 87.139	Occupied Bandwidth and Emission Limitations	Yes
2.1051, 2.1057 & 87.139,	Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057 & 87.139	Field Strength of Spurious Emissions	Yes
2.1055 & 87.133	Frequency Stability	Yes

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

4.4. DEVIATION OF STANDARD TEST PROCEDURES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87
March 27, 2019

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

5.5. RF POWER OUTPUT [§§ 2.1046 & 87.131]

5.5.1. Limits

The following table lists authorized emissions and maximum power. Power must be determined by direct measurement.

Class of station	Frequency band/ frequency	Authorized emission(s) ²	Maximum power ¹
Aeronautical advisory	VHF	A3E	10 watts ³
Aeronautical multicom	VHF	A3E	10 watts
Aeronautical search and rescue	VHF	A3E	10 watts
Aeronautical utility mobile	VHF	A3E	10 watts

Notes:

- (1) The power is measured at the transmitter output terminals and the type of power is determined according to the emission designator as follows:
 - (i) Mean power (pY) for amplitude modulated emissions and transmitting both sidebands using unmodulated full carrier.
 - (ii) Peak envelope power (pX) for all emission designators other than those referred to in paragraph (i) of this note.
- (2) Excludes automatic link establishment.
- (3) Power is limited to 0.5 watt, but may not exceed 2 watts when station is used in an automatic unattended mode.

5.5.2. Method of Measurements

Refer to Exhibit 8, Section 8.1 of this report for measurement details.

5.5.3. Test Data

DC Input 7.2 Vdc

Chan- nel	Frequencies MHz	Channel Spacing	Power Rating Watts	Power Rating dBm	Measured dBm	Actual Power dBm	Actual Power Watts
1	118.010	8.33	1.8	32.55	2.81	32.84	1.92
2	127.505	8.33	1.8	32.55	2.84	32.87	1.94
3	136.990	8.33	1.8	32.55	2.73	32.76	1.89
4	118.025	25	1.8	32.55	2.81	32.84	1.92
5	127.500	25	1.8	32.55	2.84	32.87	1.94
6	136.975	25	1.8	32.55	2.73	32.76	1.89

5.6. OCCUPIED BANDWIDTH AND EMISSION LIMITATIONS [§§ 2.1049, 87.135 & 87.139]

5.6.1. Limits

§ 87.139(a) Except for ELTs and when using single sideband (R3E, H3E, J3E), or frequency modulation (F9) or digital modulation (F9Y) for telemetry or telecommand in the frequency bands 1435–1535 MHz and 2310–2390 MHz or digital modulation (G7D) for differential GPS, the mean power of any emission must be attenuated below the mean power of the transmitter (pY) as follows:

- (1) When the frequency is removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth the attenuation must be at least 25 dB;
- (2) When the frequency is removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth the attenuation must be at least 35 dB.
- (3) When the frequency is removed from the assigned frequency by more than 250 percent of the authorized bandwidth the attenuation for aircraft station transmitters must be at least 40 dB; and the attenuation for aeronautical station transmitters must be at least $43 + 10 \log_{10} pY$ dB.

5.6.2. Method of Measurements

Refer to Exhibit 8, Section 8.4 of this report for measurement details.

5.6.3. Test Data


5.6.3.1. 99% Occupied Bandwidth

Frequency (MHz)	*Measured 99% OBW (kHz)	Authorized Bandwidth (kHz)
118.010	5.38	8.33
127.505	5.43	8.33
136.990	5.38	8.33
118.025	5.51	25.0
127.500	5.58	25.0
136.975	5.58	25.0

* See the following plots for details of measurements

5.6.3.2. Configuration: 99%OBW, 118.01MHz, 8.33 KHz channel space


OBW: 5.38 KHz

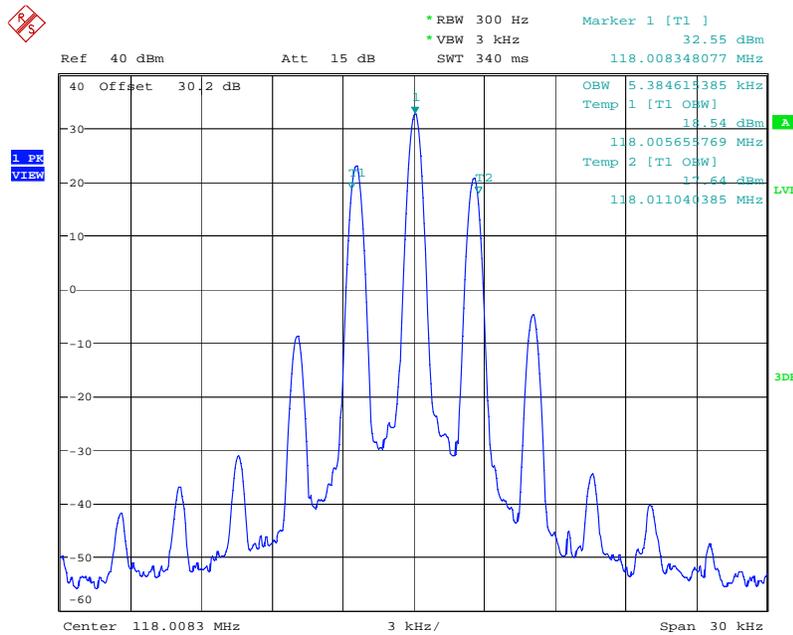

Date: 19.MAR.2019 08:43:37

5.6.3.4. Configuration: 99%OBW, 136.990MHz, 8.33 KHz channel space


OBW: 5.38 KHz

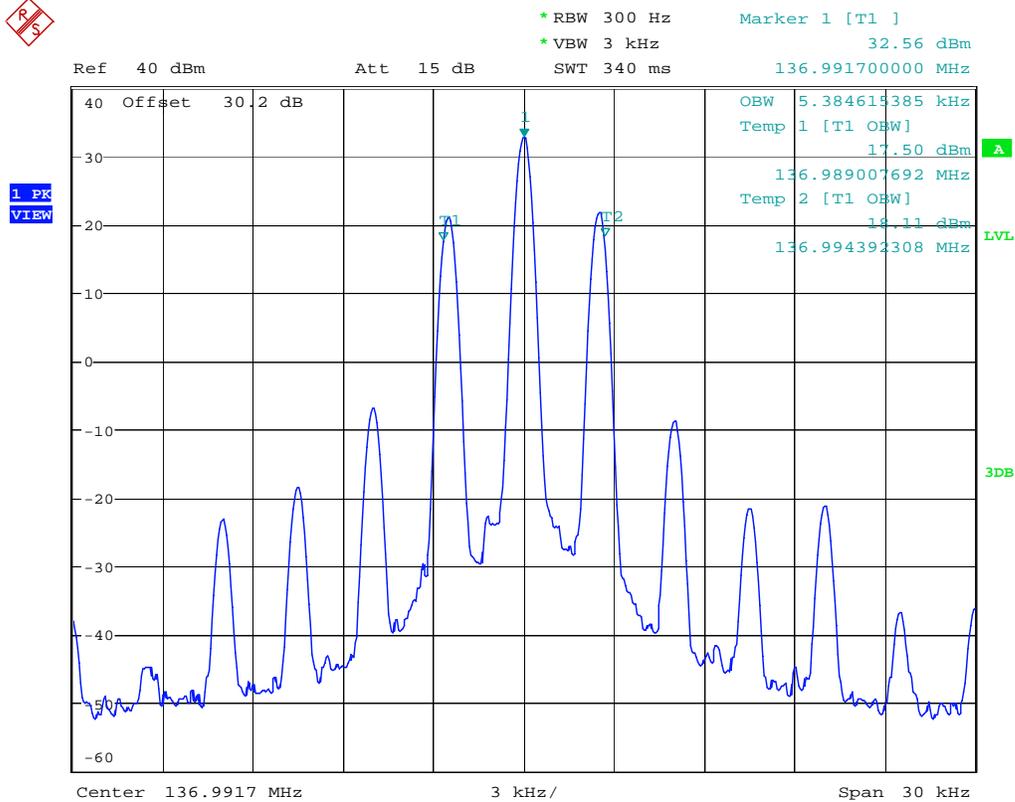

Date: 19.MAR.2019 08:55:07

5.6.3.5. Configuration: 99%OBW, 118.025MHz, 25KHz channel space


OBW: 5.51 KHz

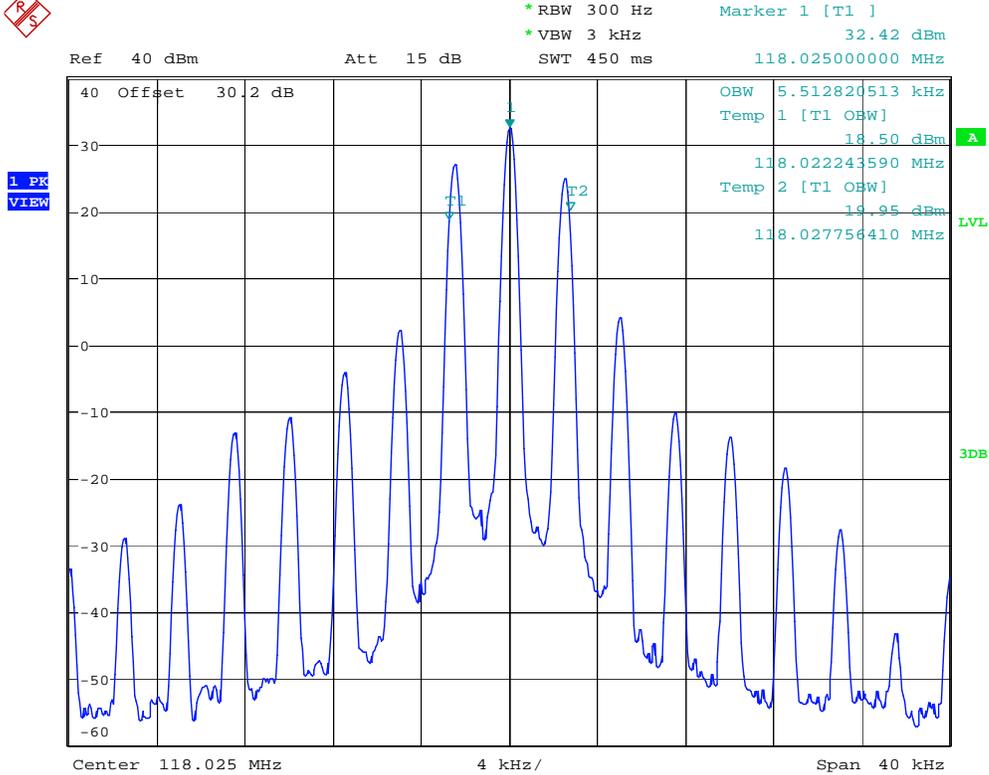

Date: 19.MAR.2019 08:46:18

5.6.3.6. Configuration: 99%OBW, 127.500MHz, 25KHz channel space


OBW: 5.58 KHz

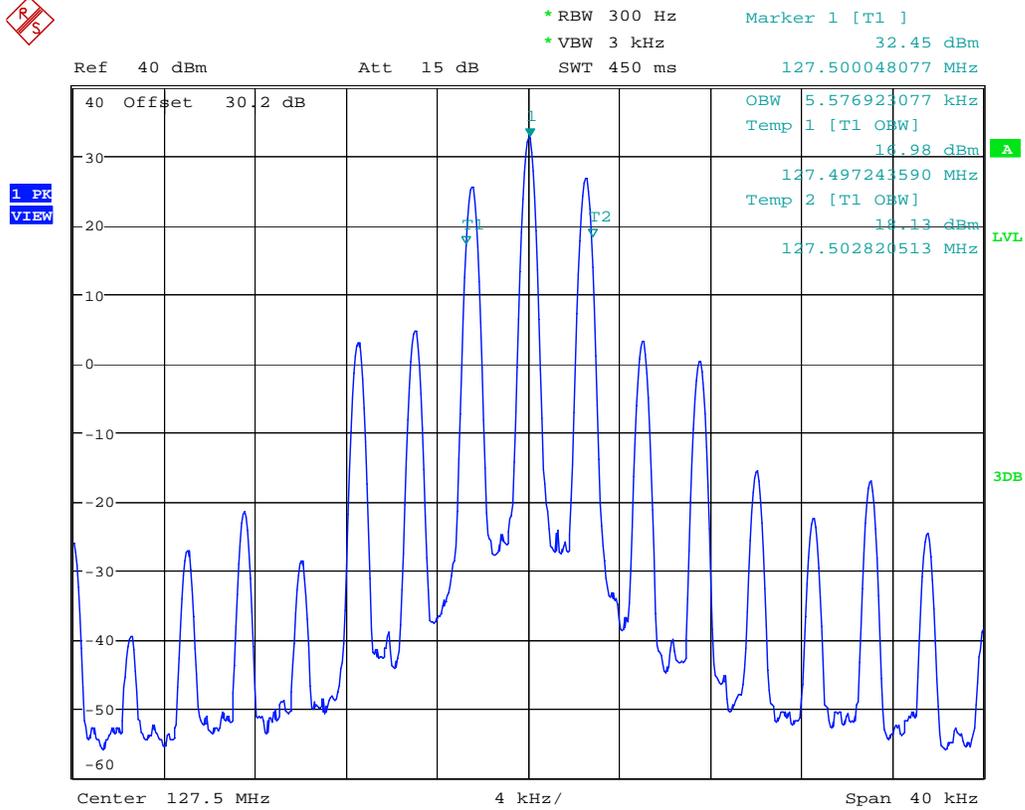

Date: 19.MAR.2019 08:51:43


5.6.3.7. Configuration: 99%OBW, 136.975MHz, 25KHz channel space

OBW: 5.58 KHz

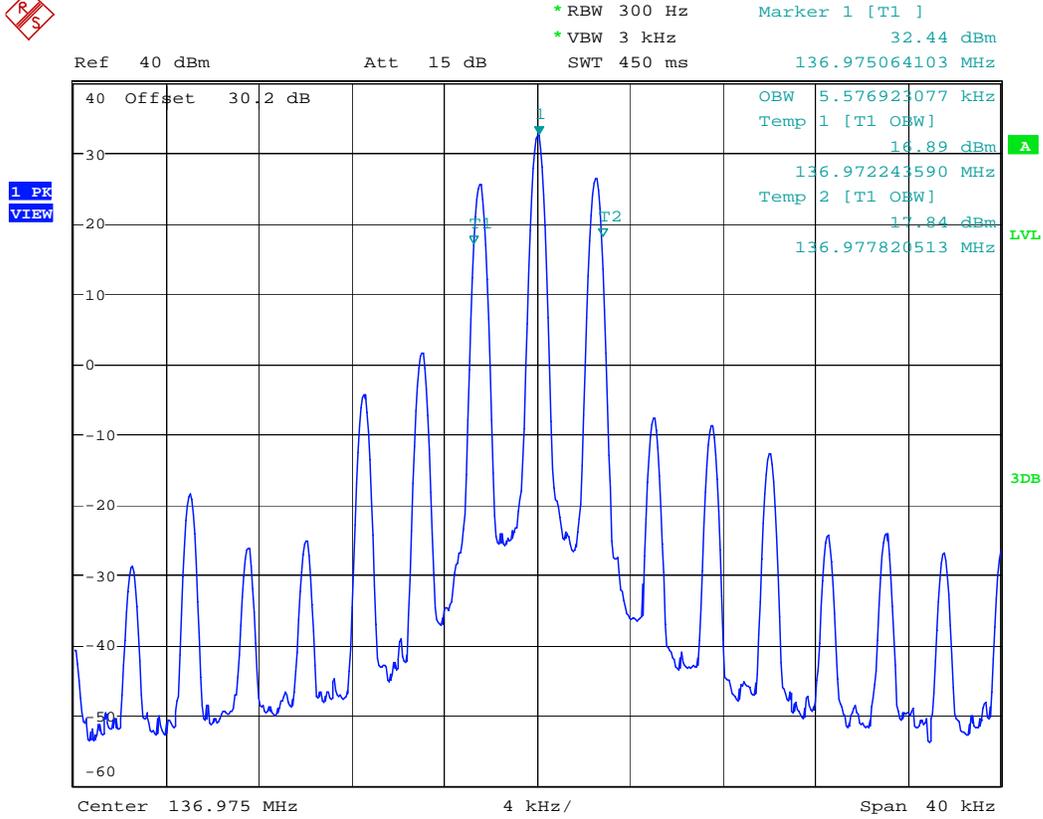


Date: 19.MAR.2019 08:56:30

5.6.3.8. Configuration: Emission Limitation, 118.01MHz, 8.33 KHz channel space

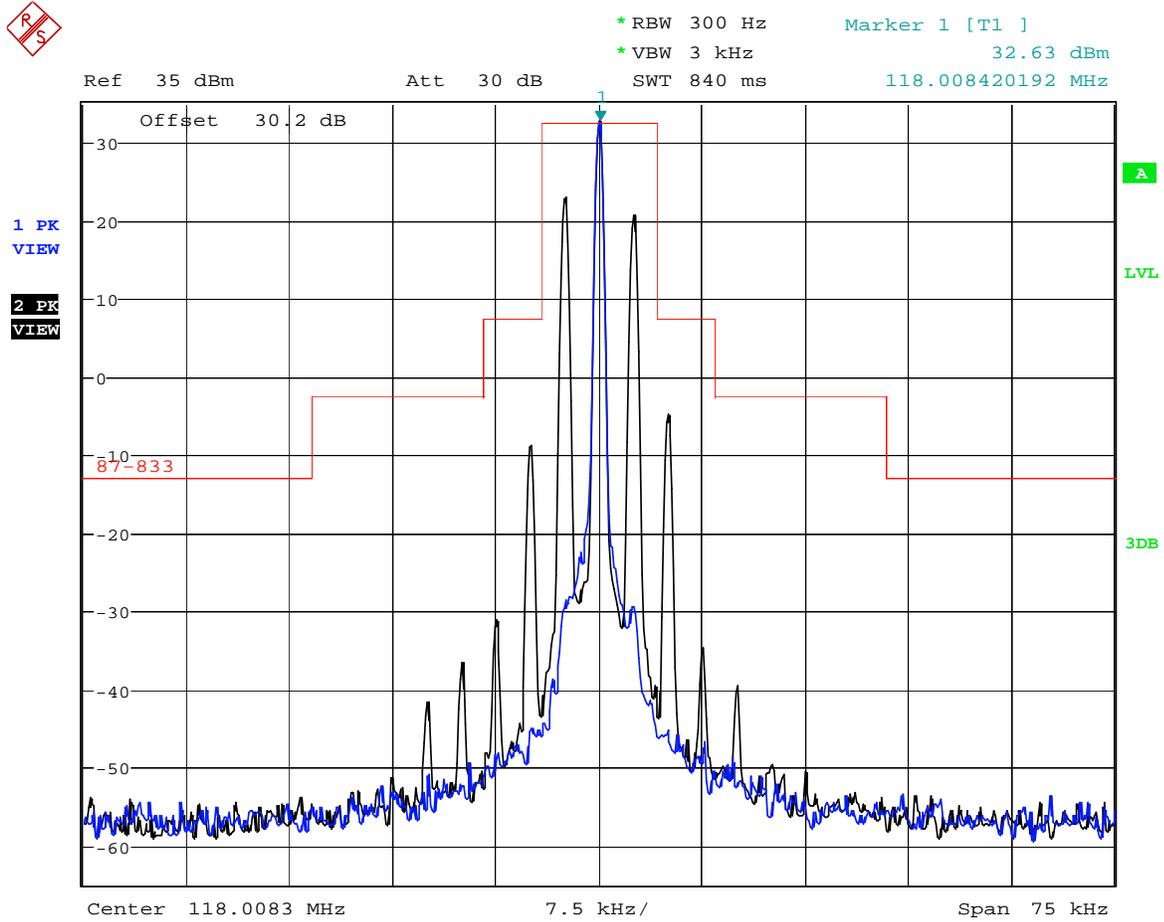


Date: 19.MAR.2019 09:36:15

5.6.3.9. Configuration: Emission Limitation, 127.505MHz, 8.33 KHz channel space

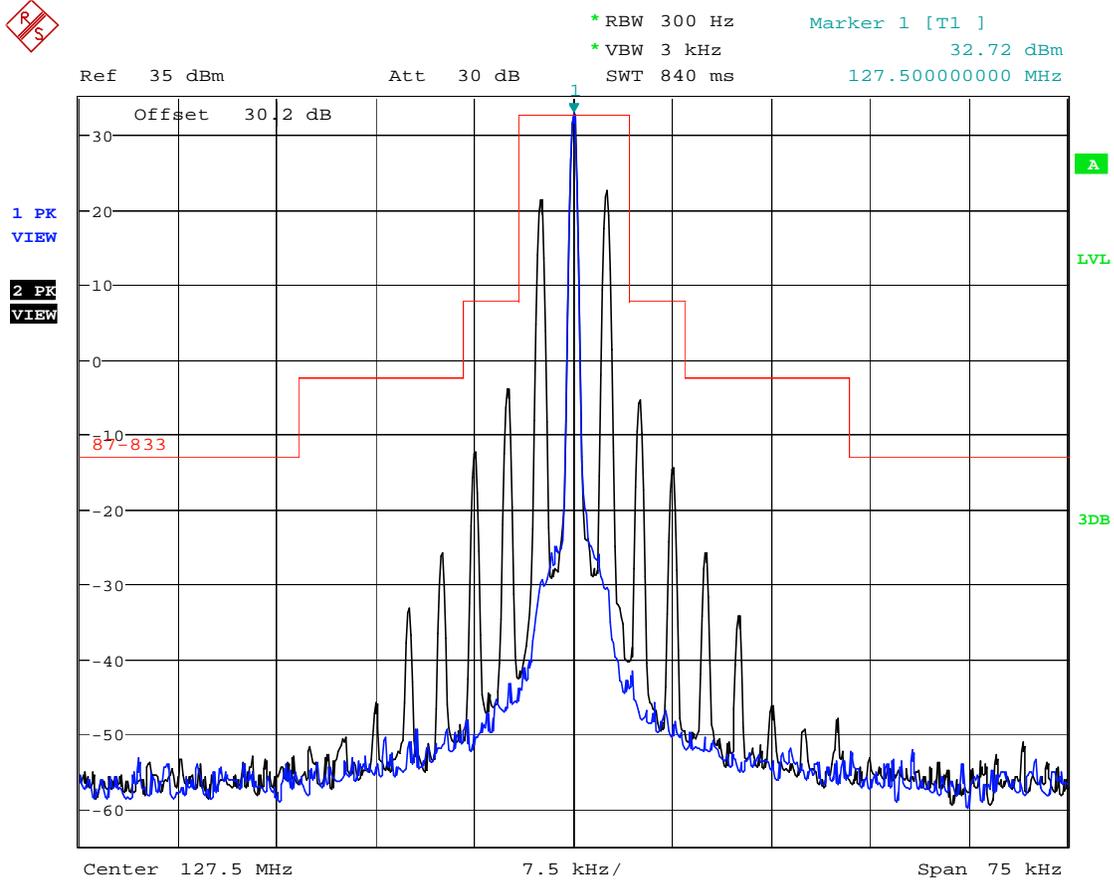


Date: 19.MAR.2019 09:29:53

5.6.3.10. Configuration: Emission Limitation, 136.990MHz, 8.33 KHz channel space

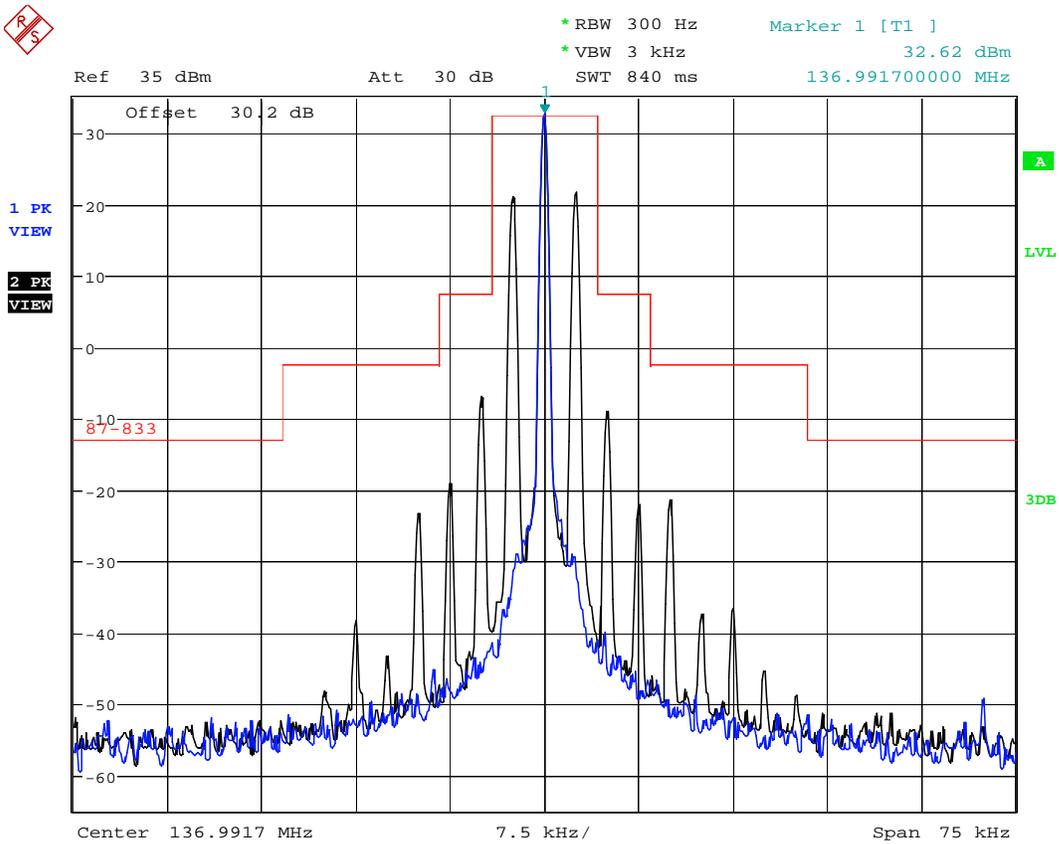


Date: 19.MAR.2019 09:22:11

5.6.3.11. Configuration: Emission Limitation, 118.025MHz, 25 KHz channel space

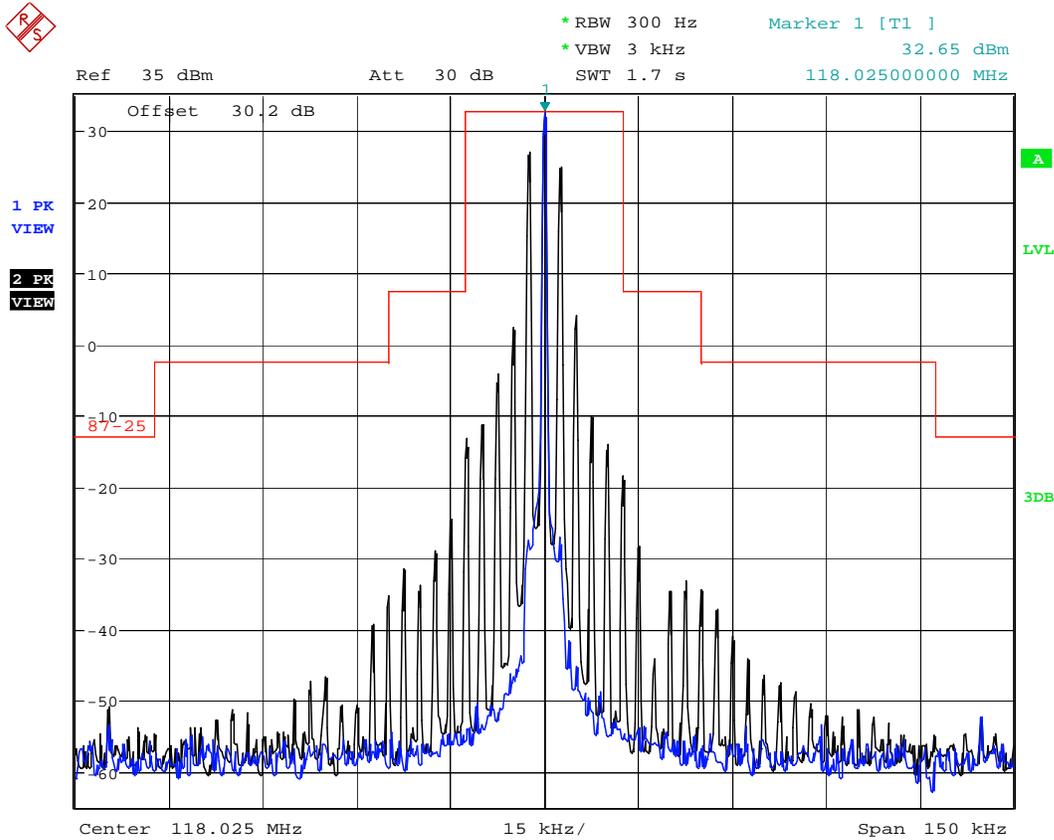


Date: 19.MAR.2019 09:39:50

5.6.3.12. Configuration: Emission Limitation, 127.500MHz, 25 KHz channel space

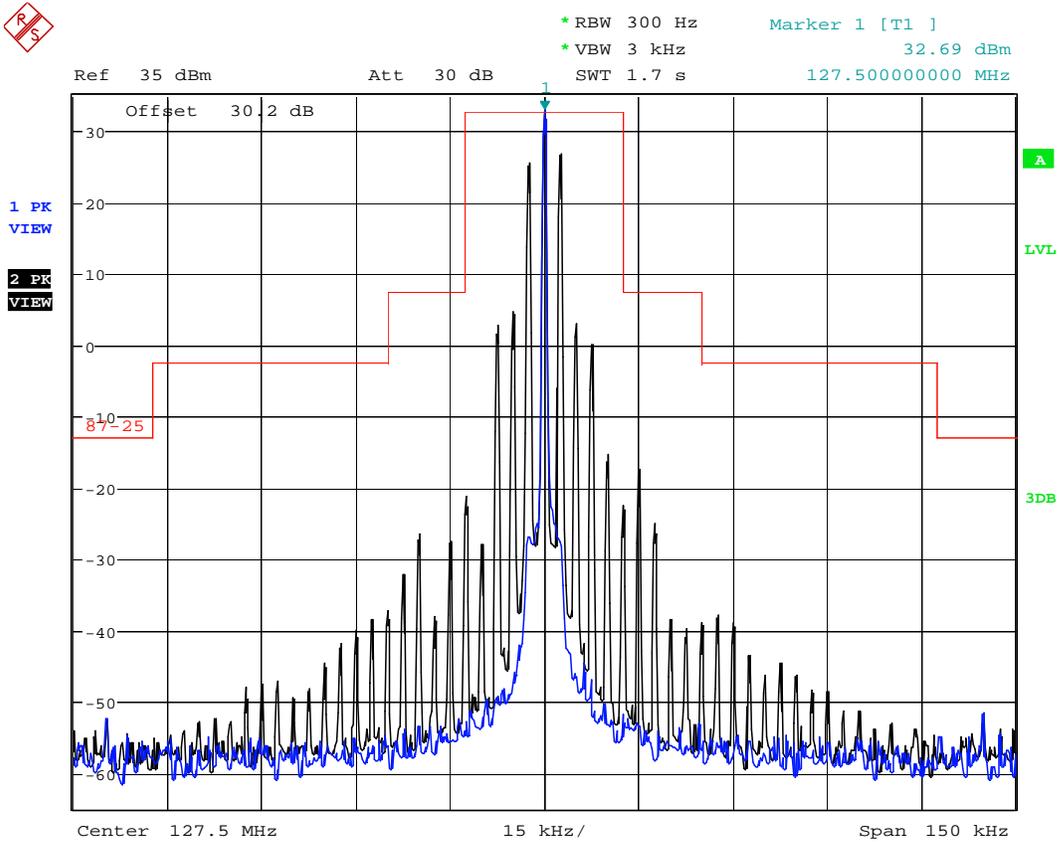

Date: 19.MAR.2019 09:43:37

5.6.3.13. Configuration: Emission Limitation, 136.975MHz, 25 KHz channel space

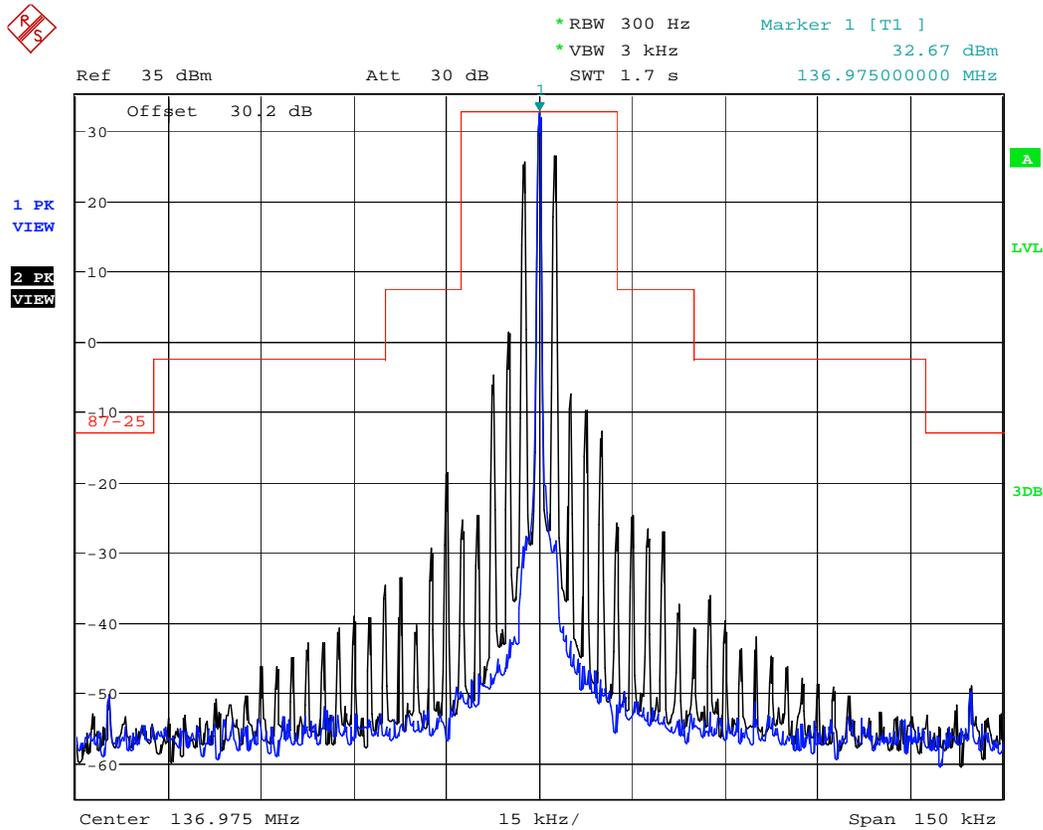

Date: 19.MAR.2019 09:47:00

5.7. MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE [§§ 2.1047(a) & 87.141(a)]

5.7.1. Limits

87.141(a) When A3E emission is used, the modulation percentage must not exceed 100 percent. This requirement does not apply to emergency locator transmitters or survival craft transmitters.

(f) Each frequency modulated transmitter equipped with a modulation limiter must have a low pass filter between the modulation limiter and the modulated stage. At audio frequencies between 3 kHz and 15 kHz, the filter must have an attenuation greater than the attenuation at 1 kHz by at least $40 \log_{10}(f/3)$ db where "f" is the frequency in kilohertz. Above 15 kHz, the attenuation must be at least 28 db greater than the attenuation at 1 kHz.

5.7.2. Method of Measurements

The rated audio input signal was applied to the input of the audio lowpass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT (Audio) spectrum analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

5.7.3. Test Data

Note: Due to the difficulty of measuring the frequency response of the internal low-pass filter, the frequency response of all modulation states was performed to show the roll-off at 3 kHz in comparison with FCC Limit for audio low-pass filter.

5.7.3.1. Audio Frequency Response of All Modulation States for 8.33 kHz Channel Spacing

Frequency (kHz)	Audio IN (dBV)	Audio OUT (dBV)	Attenuation (OUT - IN) (dB)	Attenuation wrt. 1 kHz (dB)	Recommended Attenuation wrt. 1 kHz (dB)
0.1	-29.9	-17.05	12.9	-8.2	--
0.2	-29.9	-12.09	17.8	-3.2	--
0.4	-29.9	-10.72	19.2	-1.9	--
0.6	-29.9	-10.01	19.9	-1.2	--
0.8	-29.9	-9.26	20.6	-0.4	--
1.0	-29.9	-8.85	21.1	0.0	--
1.5	-29.9	-10.12	19.8	-1.3	--
2.0	-29.9	-11.72	18.2	-2.9	--
2.5	-29.9	-13.51	16.4	-4.7	--
3.0	-29.9	-33.27	-3.4	-24.4	0
3.5	-29.9	-54.07	-24.2	-45.2	-3
4.0	-29.9	-68.82	-38.9	-60.0	-5
4.5	-29.9	-80.46	-50.6	-71.6	-7
5.0	-29.9	-90.00	-60.1	-81.2	-9
6.0	-29.9	-90.00	-60.1	-81.2	-12
7.0	-29.9	-90.00	-60.1	-81.2	-15
8.0	-29.9	-90.00	-60.1	-81.2	-17
9.0	-29.9	-90.00	-60.1	-81.2	-19
10.0	-29.9	-90.00	-60.1	-81.2	-21
12.0	-29.9	-90.00	-60.1	-81.2	-24
14.0	-29.9	-90.00	-60.1	-81.2	-27
16.0	-29.9	-90.00	-60.1	-81.2	-28
18.0	-29.9	-90.00	-60.1	-81.2	-28
20.0	-29.9	-90.00	-60.1	-81.2	-28
25.0	-29.9	-90.00	-60.1	-81.2	-28
30.0	-29.9	-90.00	-60.1	-81.2	-28
35.0	-29.9	-90.00	-60.1	-81.2	-28
40.0	-29.9	-90.00	-60.1	-81.2	-28
45.0	-29.9	-90.00	-60.1	-81.2	-28
50.0	-29.9	-90.00	-60.1	-81.2	-28

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87

March 27, 2019

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


Audio Frequency Response 8.33 kHz Channel Spacing

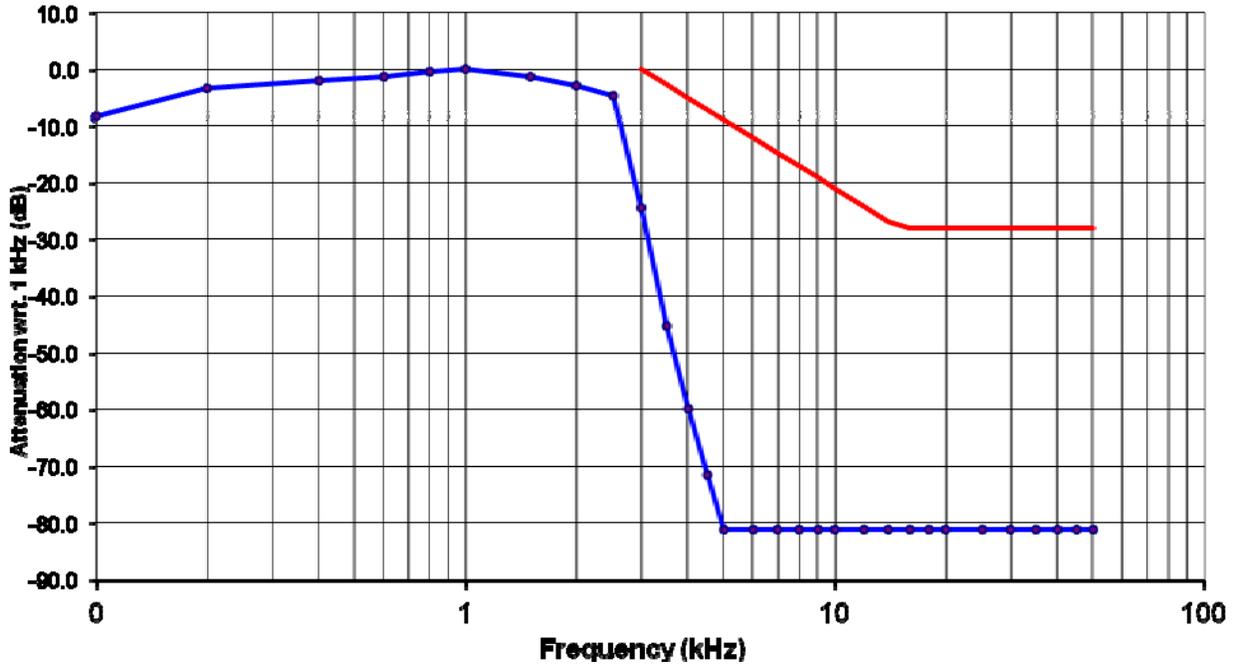

5.7.3.2. Audio Frequency Response of All Modulation States for 25 kHz Channel Spacing

Frequency (kHz)	Audio IN (dBV)	Audio OUT (dBV)	Attenuation (OUT - IN) (dB)	Attenuation wrt. 1 kHz (dB)	Recommended Attenuation wrt. 1 kHz (dB)
0.1	-29.24	-15.91	13.3	-7.3	--
0.2	-29.24	-10.73	18.5	-2.1	--
0.4	-29.24	-9.54	19.7	-0.9	--
0.6	-29.24	-9.14	20.1	-0.5	--
0.8	-29.24	-8.83	20.4	-0.2	--
1.0	-29.24	-8.61	20.6	0.0	--
1.5	-29.24	-8.59	20.7	0.0	--
2.0	-29.24	-9.51	19.7	-0.9	--
2.5	-29.24	-9.35	19.9	-0.7	--
3.0	-29.24	-16.36	12.9	-7.8	0
3.5	-29.24	-36.89	-7.7	-28.3	-3
4.0	-29.24	-51.14	-21.9	-42.5	-5
4.5	-29.24	-62.35	-33.1	-53.7	-7
5.0	-29.24	-71.73	-42.5	-63.1	-9
6.0	-29.24	-87.35	-58.1	-78.7	-12
7.0	-29.24	-90.00	-60.8	-81.4	-15
8.0	-29.24	-90.00	-60.8	-81.4	-17
9.0	-29.24	-90.00	-60.8	-81.4	-19
10.0	-29.24	-90.00	-60.8	-81.4	-21
12.0	-29.24	-90.00	-60.8	-81.4	-24
14.0	-29.24	-90.00	-60.8	-81.4	-27
16.0	-29.24	-90.00	-60.8	-81.4	-28
18.0	-29.24	-90.00	-60.8	-81.4	-28
20.0	-29.24	-90.00	-60.8	-81.4	-28
25.0	-29.24	-90.00	-60.8	-81.4	-28
30.0	-29.24	-90.00	-60.8	-81.4	-28
35.0	-29.24	-90.00	-60.8	-81.4	-28
40.0	-29.24	-90.00	-60.8	-81.4	-28
45.0	-29.24	-90.00	-60.8	-81.4	-28
50.0	-29.24	-90.00	-60.8	-81.4	-28

Audio Frequency Response 25 kHz Channel Spacing

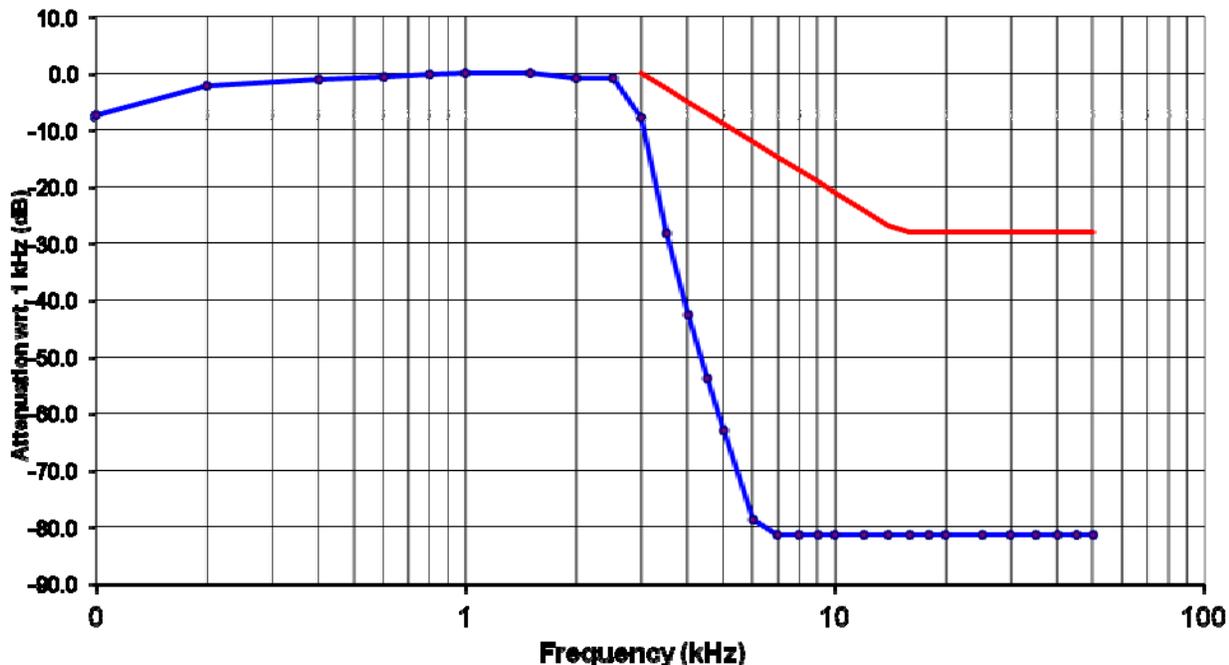

5.8. MODULATION CHARACTERISTICS – MODULATION LIMITING [§§ 2.1047(b) & 87.141]

5.8.1. Limits

- (a) When A3E emission is used, the modulation percentage must not exceed 100 percent. This requirement does not apply to emergency locator transmitters or survival craft transmitters.
- (c) If any licensed radiotelephone transmitter causes harmful interference to any authorized radio service because of excessive modulation, the Commission will require the use of the transmitter to be discontinued until it is rendered capable of automatically preventing modulation in excess of 100 percent.

5.8.2. Method of Measurements

For Audio Transmitter:- The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory:- The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

5.8.3. Test Data

5.8.3.1. Modulation Limiting at 8.33 kHz Channel Spacing

MODULATING SIGNAL LEVEL (mVrms)	Modulation Depth (%) at the following modulating frequency:					MODULATION LIMIT (%) %
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
1	1.20	1.92	2.08	0.78	0.68	100
2	1.80	3.14	3.40	0.79	0.73	100
4	2.93	5.52	6.30	0.98	0.64	100
6	4.21	8.13	9.41	1.15	0.65	100
8	5.54	10.80	12.27	1.36	0.65	100
10	6.61	13.13	15.06	1.57	0.68	100
15	9.62	19.55	22.65	2.05	0.70	100
20	12.89	26.58	30.94	2.50	0.70	100
25	16.16	33.35	38.86	2.90	0.72	100
30	19.32	39.82	46.60	3.43	0.73	100
35	22.45	46.40	54.50	3.94	0.75	100
40	25.39	53.20	62.40	4.45	0.70	100
45	28.56	59.90	70.10	4.88	0.69	100
50	31.82	66.50	77.60	5.37	0.69	100
55	34.96	73.30	85.40	5.83	0.63	100
60	38.27	79.80	87.10	6.36	0.60	100
65	38.68	83.30	87.30	6.56	0.58	100
70	39.19	83.80	87.50	6.60	0.60	100
75	39.25	83.90	87.40	6.69	0.60	100
80	39.56	83.90	87.30	6.56	0.58	100
85	39.80	83.90	87.30	6.58	0.57	100
90	39.90	84.00	87.30	6.58	0.54	100
100	40.10	84.00	87.30	6.59	0.56	100

Voice Signal Input Level = STD MOD Level + 16 dB
= 32 mV + 16 dB
= 46.1 dB(mVrms)
= 201.91 mVrms

Standard Modulation Level measured at 50% Modulation @ 1.0 kHz.

Modulation Frequency (kHz)	Peak Depth (%)	Maximum Limit (%)
0.1	41.80	100.0
0.2	71.00	100.0
0.4	83.80	100.0
0.6	86.00	100.0
0.8	87.90	100.0
1.0	86.80	100.0
1.2	82.50	100.0
1.4	84.30	100.0
1.6	83.20	100.0
1.8	79.30	100.0
2.0	74.40	100.0
2.5	56.80	100.0
3.0	6.35	100.0
3.5	0.81	100.0
4.0	0.35	100.0
4.5	0.23	100.0
5.0	0.28	100.0
6.0	0.31	100.0
7.0	0.26	100.0
8.0	0.25	100.0
9.0	0.24	100.0
10.0	0.22	100.0

5.8.3.2. Modulation Limiting at 25 kHz Channel Spacing

MODULATING SIGNAL LEVEL (mVrms)	Modulation Depth (%) at the following modulating frequency:					MODULATION LIMIT (%) %
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
1	1.26	2.16	2.03	1.27	0.64	100
2	1.77	3.44	3.33	1.93	0.74	100
4	3.23	6.06	6.13	3.15	0.73	100
6	4.41	8.89	8.93	4.34	0.80	100
8	5.85	11.98	11.77	5.57	0.82	100
10	6.81	14.43	14.30	6.68	0.81	100
15	9.80	21.62	21.51	9.76	0.71	100
20	13.44	29.48	29.34	13.18	0.76	100
25	16.45	36.86	36.62	16.29	0.81	100
30	19.65	44.20	44.20	19.51	0.84	100
35	22.96	51.60	51.10	22.64	0.77	100
40	26.03	58.90	58.50	25.79	0.76	100
45	29.34	66.20	65.60	29.06	0.74	100
50	32.50	73.10	72.50	32.26	0.81	100
55	35.95	80.60	80.10	35.64	0.78	100
60	39.18	87.60	86.30	38.72	0.79	100
65	41.20	89.60	86.70	39.73	0.78	100
70	41.40	90.00	86.80	39.82	0.73	100
75	41.70	90.20	86.90	39.86	0.74	100
80	42.20	90.40	87.10	39.90	0.73	100
85	42.20	90.40	86.80	39.85	0.61	100
90	42.40	90.40	86.80	39.91	0.58	100
100	42.70	90.40	86.80	39.85	0.58	100

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87

March 27, 2019

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB
= 34.5 mV + 16 dB
= 46.76 dB(mVrms)
= 217.68 mVrms

Standard Modulation Level measured at 50% Modulation @ 1.0 kHz.

Modulation Frequency (kHz)	Peak Depth (%)	Maximum Limit (%)
0.1	44.80	100.0
0.2	76.20	100.0
0.4	90.30	100.0
0.6	91.00	100.0
0.8	89.70	100.0
1.0	86.30	100.0
1.2	81.00	100.0
1.4	83.60	100.0
1.6	86.50	100.0
1.8	87.50	100.0
2.0	88.50	100.0
2.5	90.00	100.0
3.0	39.70	100.0
3.5	4.04	100.0
4.0	0.98	100.0
4.5	0.43	100.0
5.0	0.31	100.0
6.0	0.27	100.0
7.0	0.26	100.0
8.0	0.26	100.0
9.0	0.23	100.0
10.0	0.23	100.0

5.9. FIELD STRENGTH OF SPURIOUS EMISSIONS [§§ 2.1053, 87.139]

5.9.1. Limits @ FCC 87.139

§ 87.139(a)(3) - When the frequency is removed from the assigned frequency by more than 250 percent of the authorized bandwidth the attenuation for aircraft station transmitters must be at least 40 dB; and the attenuation for aeronautical station transmitters must be at least $43 + 10 \log_{10} pY$ dB.

5.9.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 8, Section 8.2 of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
Lowest ERP of the carrier = EIRP - 2.15 dB = $P_c + G - 2.15 \text{ dB} = P_c \text{ dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$
- (3) Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

ERP of spurious/harmonic (dBc) = ERP of carrier (dBm) - ERP of spurious/harmonic emission (dBm)

5.9.3. Test Data

Remark(s):

- The emissions were scanned from 30 MHz to 5 GHz; all spurious emissions that are in excess of 20dB below the specified limit shall be recorded.
- There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and input voltage levels. Therefore, the RF spurious/harmonic emissions in this section would be performed for 25 KHz channel spacing and limit of 43 + 10 log10 pY dB applied for worst case.

Carrier Frequency:		118.025 MHz				
Power:		1.92 W				
Limit:		-13 dBm				
Frequency (MHz)	E-Field (dBµV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP (dBm)	Limit (dBm)	Margin (dB)
30 - 5000	*	Peak	H/V	*	-13	*

* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.

Carrier Frequency:		127.500 MHz				
Power:		1.94 W				
Limit:		-13 dBm				
Frequency (MHz)	E-Field (dBµV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP (dBm)	Limit (dBm)	Margin (dB)
30 - 5000	*	Peak	H/V	*	-13	*

* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.

Carrier Frequency:		136.975 MHz				
Power:		1.89 W				
Limit:		-13 dBm				
Frequency (MHz)	E-Field (dBµV/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP (dBm)	Limit (dBm)	Margin (dB)
30 - 5000	*	Peak	H/V	*	-13	*

* All harmonics and spurious emissions are more than 20 dB below the specified attenuation limit.

5.10. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§§ 2.1051, 87.139]

5.10.1. Limits

§§ 87.139(a)(3) When the frequency is removed from the assigned frequency by more than 250 percent of the authorized bandwidth the attenuation for aircraft station transmitters must be at least 40 dB; and the attenuation for aeronautical station transmitters must be at least $43 + 10 \log_{10} pY$ dB.


5.10.2. Method of Measurements

Refer to Exhibit 8 of this report for measurement method.


5.10.3. Test Data

Note: There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and input voltage levels. Therefore, the RF spurious/harmonic emissions in this section would be performed for 25 KHz channel spacing and limit of $43 + 10 \log_{10} pY$ dB applied for worst case.


5.10.3.1. Configuration: Tx Conducted, 118.025 MHz, 25 KHz channel space

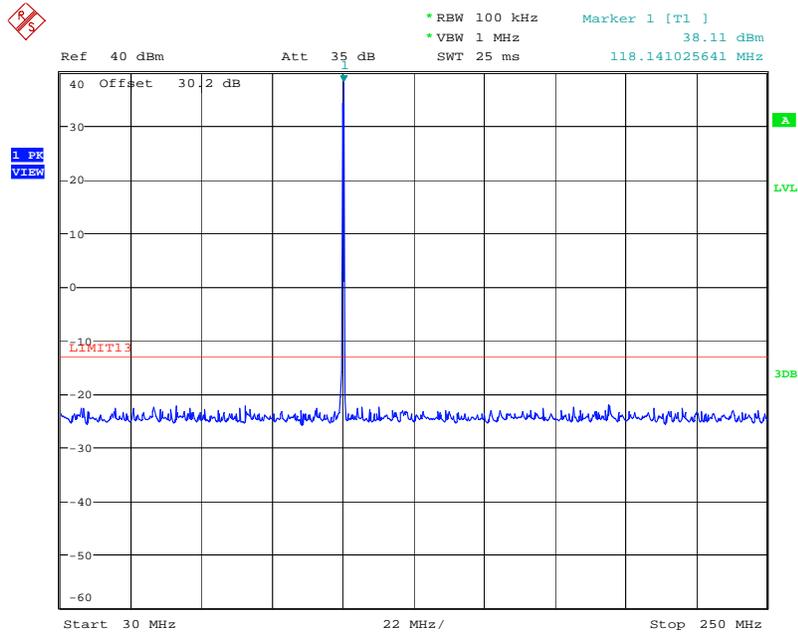

Date: 19.MAR.2019 12:50:50

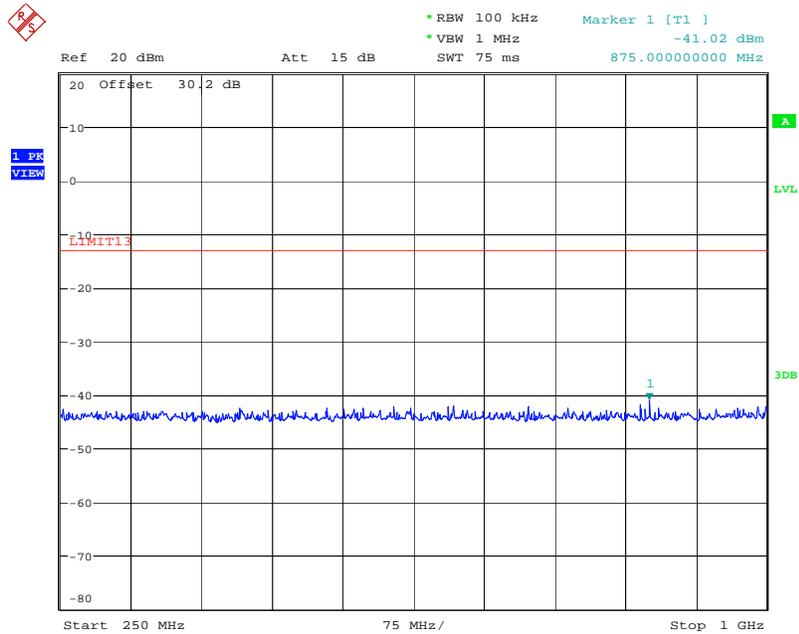

Date: 19.MAR.2019 13:17:03

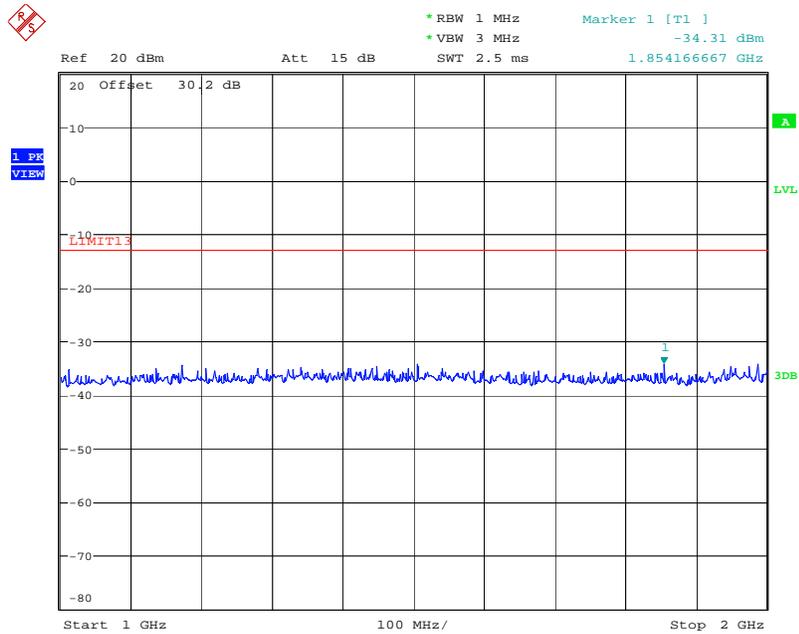

Date: 19.MAR.2019 13:25:16

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4


Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87


March 27, 2019

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.10.3.2. Configuration: Tx Conducted, 127.5 MHz, 25 KHz

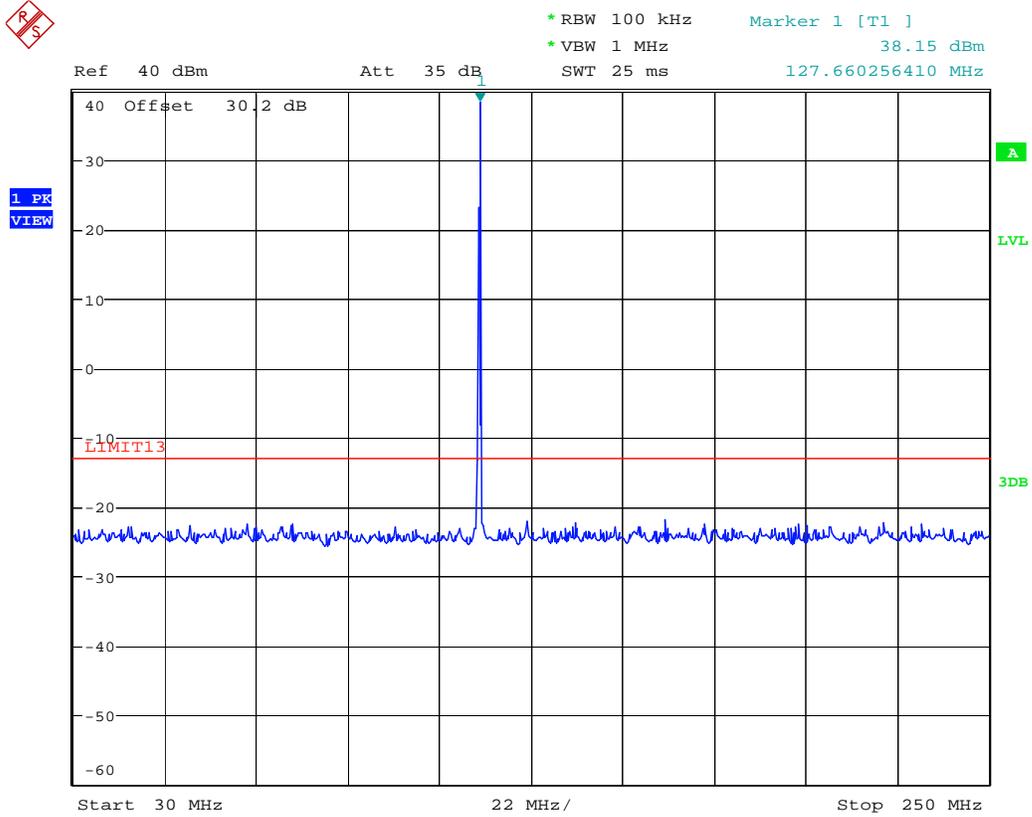

Date: 19.MAR.2019 12:53:52

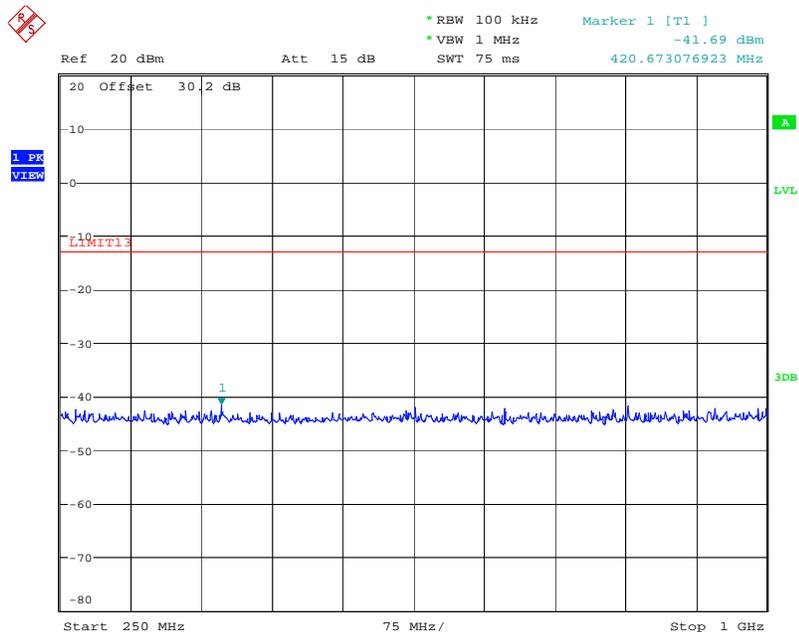

Date: 19.MAR.2019 13:13:30

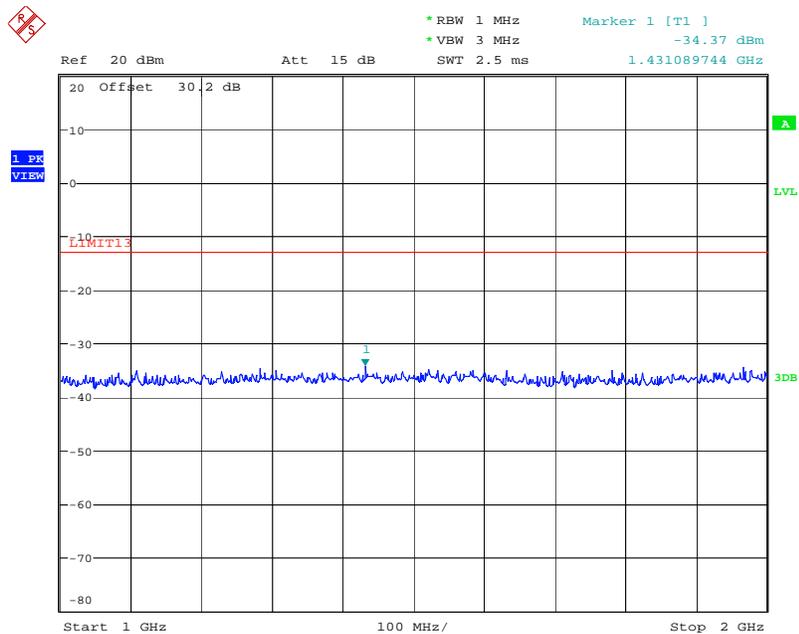

Date: 19.MAR.2019 13:27:30

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87


March 27, 2019

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.10.3.3. Configuration: Tx Conducted, 136.975 MHz, 25 KHz channel space

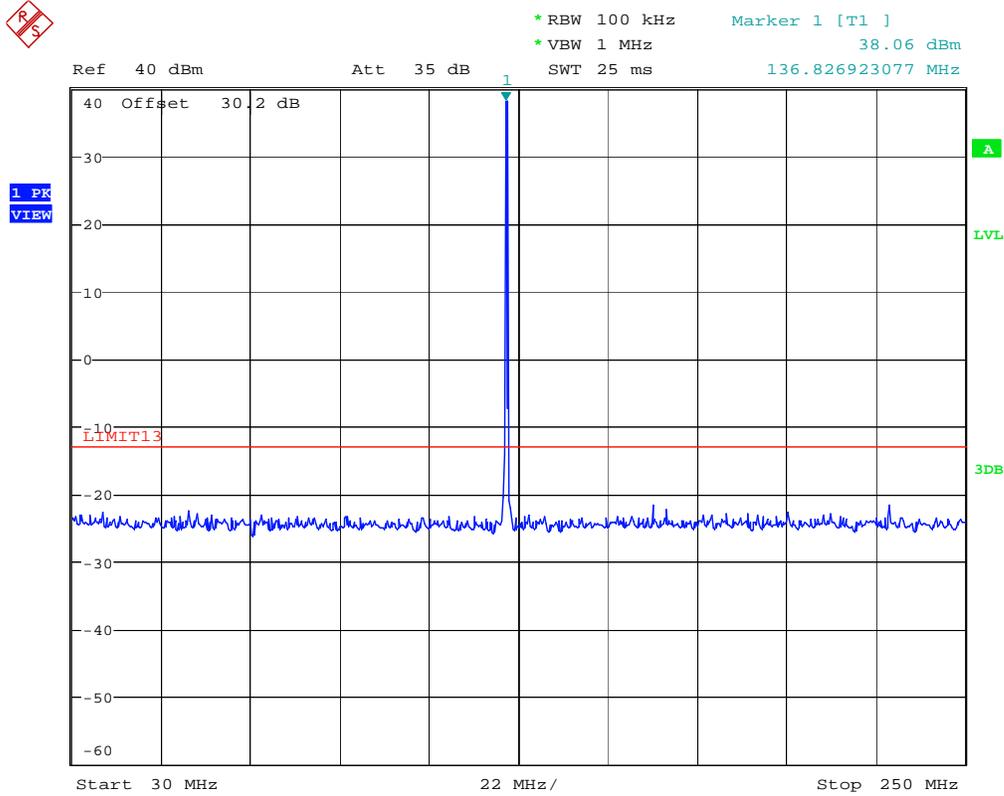

Date: 19.MAR.2019 12:48:22

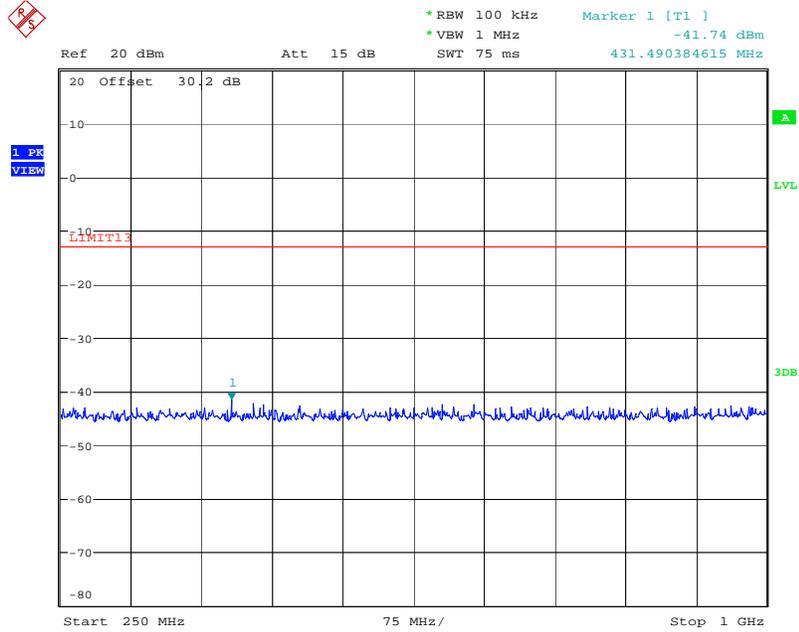

Date: 19.MAR.2019 13:19:59

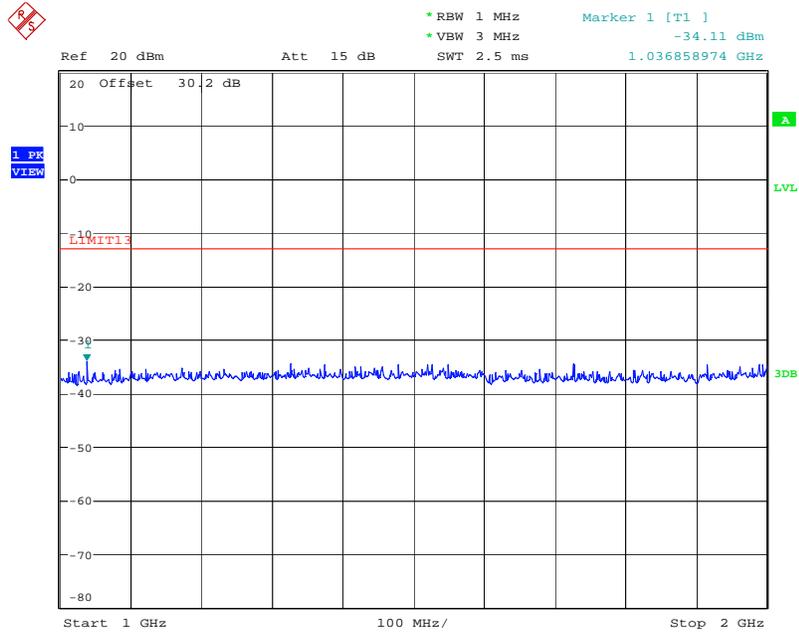

Date: 19.MAR.2019 13:23:48

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87

March 27, 2019

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.11. FREQUENCY STABILITY [§§ 2.1055 & 87.133]

5.11.1. Limits

§ 87.133 The carrier frequency of each station must be maintained within the tolerance in the following table:

Frequency band (lower limit exclusive, upper limit inclusive), and categories of station	Tolerance (ppm)
(5) Band - 108 to 137 MHz: Aircraft and other mobile stations in the Aviation Services.	*30

* For emissions G1D and G7D, the tolerance is 5 parts per 10⁶.

5.11.2. Method of Measurements


Refer to Exhibit 8 of this report for measurement method.

5.11.3. Test Data

Center Frequency:	118.01 MHz		
Full Power Level:	1.92W		
Frequency Tolerance Limit (Worst Case):	30 ppm or 3540 Hz (Manufacturer's rating: +/-0.4kHz)		
Max. Frequency Tolerance Measured:	86 Hz or 0.73 ppm		
Input Voltage Rating:	7.2 V DC		
Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 7.2 VDC	Supply Voltage (Battery end point) 5.9 VDC	Supply Voltage (115% of Nominal) 8.28 VDC
-30	-20	--	--
-20	-25	--	--
-10	30	--	--
0	33	--	--
10	33	--	--
20	40	34	45
30	54	--	--
40	62	--	--
50	75	--	--
60	86	--	--


EXHIBIT 6. TEST SETUP AND EQUIPMENT LIST

6.1. Conducted Power

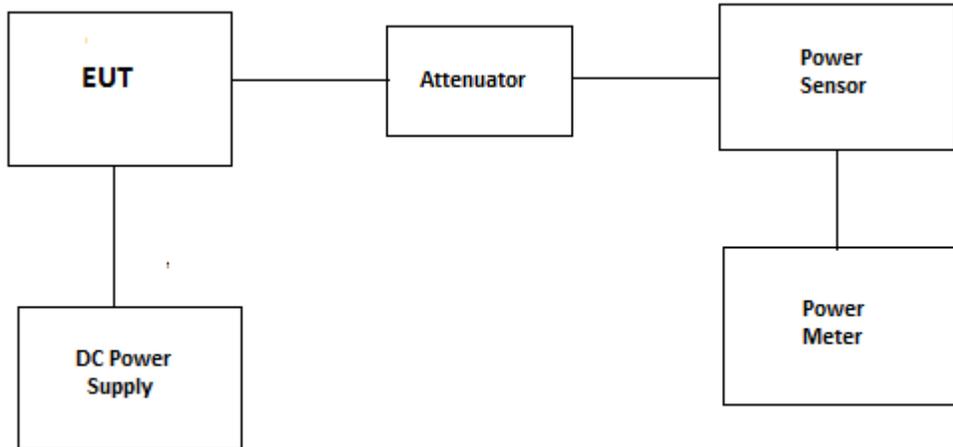


Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Power Meter	HP	436A	2709A27515	100KHz-sensor dependant	04 May 2019
Power Sensor	HP	8482A	MY41172054	10MHz-18GHz	26 Oct 2019
Attenuator	AeroflexWeinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----
Multimeter	Tenma	72-6202	02080027	---	14 Dec 2019

6.2. Modulation Limit

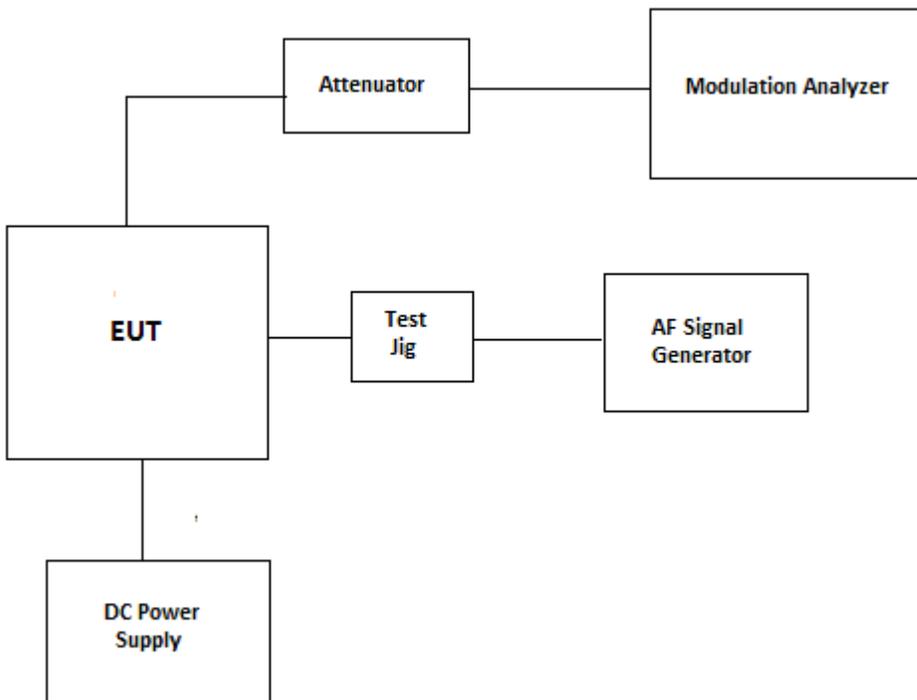

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	23 Mar 2020
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	20 Mar 2020
Digital Voltmeter	HP	3456A	2015A04523	--	19 Dec 2019
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----
Multimeter	Tenma	72-6202	02080027	---	14 Dec 2019

6.3. Audio Frequency Response

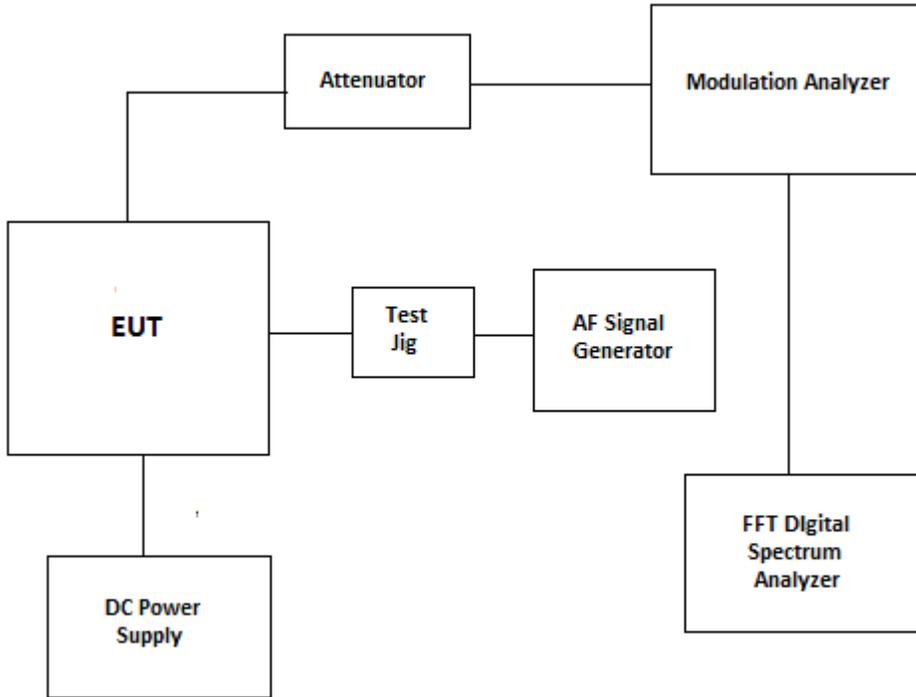

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	23 Mar 2020
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	20 Mar 2020
Digital Voltmeter	HP	3456A	2015A04523	--	19 Dec 2019
FFT Digital Spectrum Analyzer	Advantest	R9211E	8202336	10MHz-100KHz	12 Sep 2020
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----
Multimeter	Tenma	72-6202	02080027	---	14 Dec 2019

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 19ICOM509_FCC87

March 27, 2019


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.4. 99% OBW and Mask

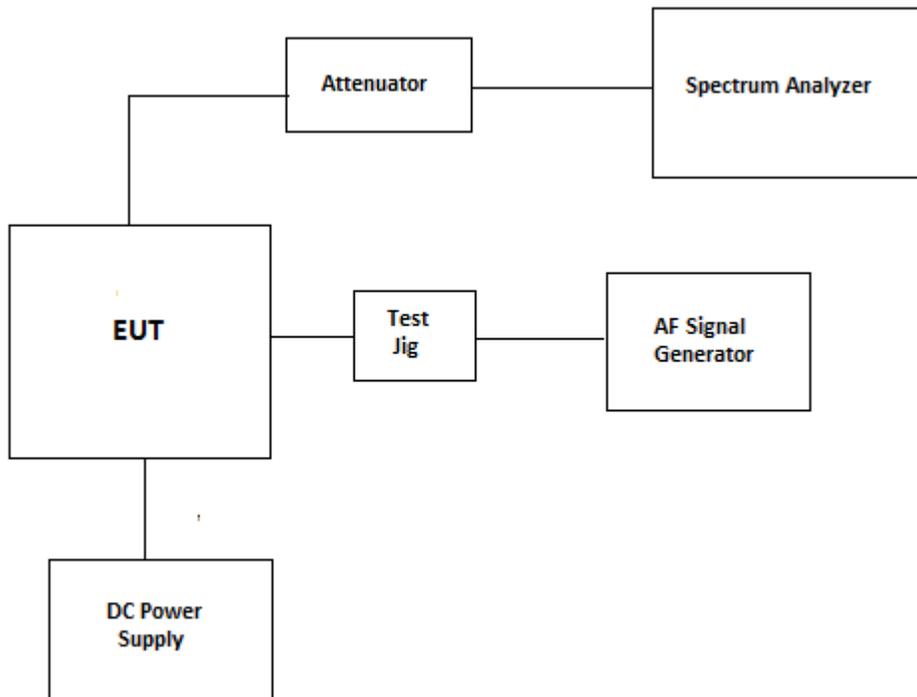


Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	06 Oct 2019
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	20 Mar 2020
Digital Voltmeter	HP	3456A	2015A04523		19 Dec 2019
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----
Multimeter	Tenma	72-6202	02080027	---	14 Dec 2019

6.5. Tx Conducted Emission

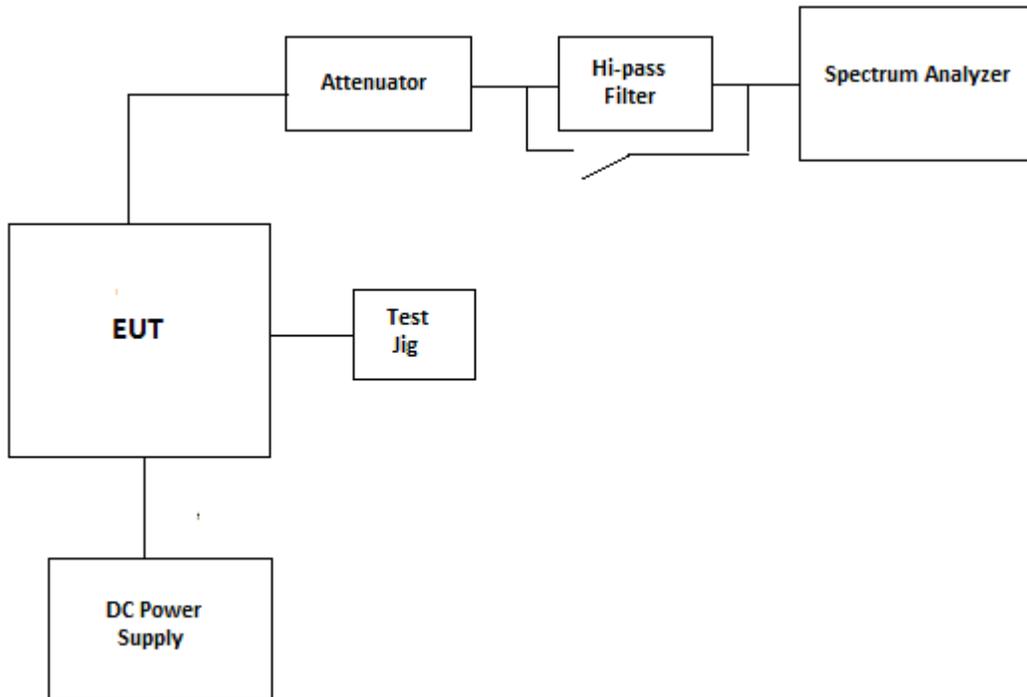


Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	06 Oct 2019
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	20 Mar 2020
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal on use
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----
Multimeter	Tenma	72-6202	02080027	---	14 Dec 2019

6.6. Rx Conducted Emission

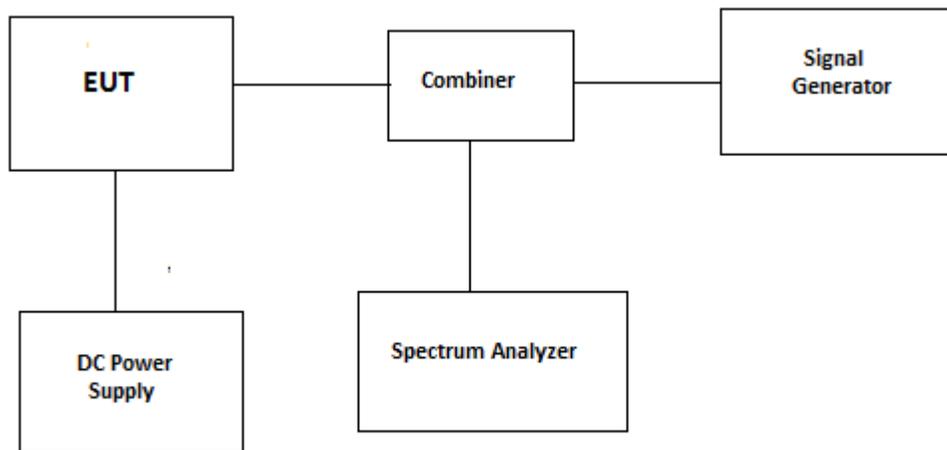


Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	06 Oct 2019
Signal Generator	Marconi	2024	112255/164	9KHz-2.4GHz	29 Aug 2019
Combiner	Weinschel 93458	1515	PS119	DC-18GHz	Cal on use
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----
Multimeter	Tenma	72-6202	02080027	---	14 Dec 2019

6.7. TX Radiated

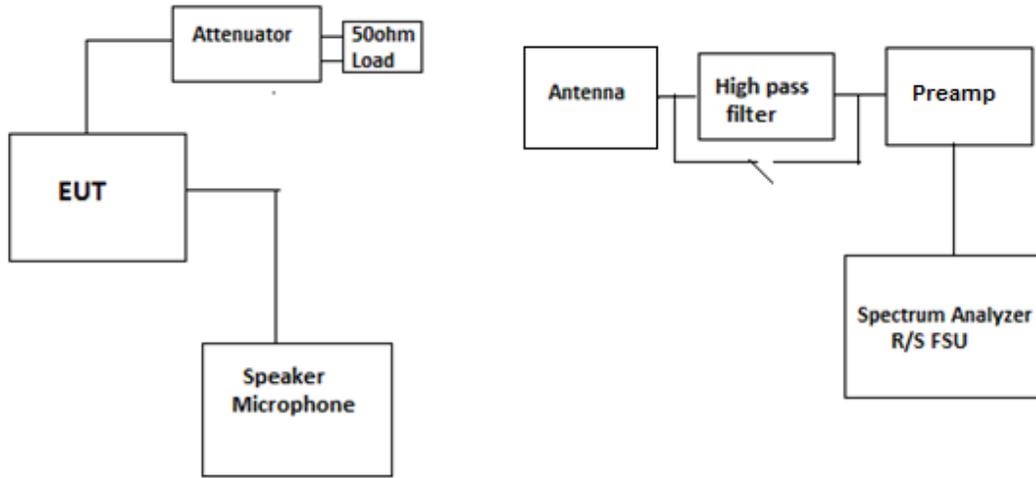


Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	06 Oct 2019
Bicon Antenna	ETS	3110B	3379	30-200MHz	06 Feb 2020
Log Periodic Antenna	ETS	3148	00023845	200-2000MHz	02 Aug 2020
Horn Antenna	ETS	3117	00119425	1-18GHz	29 Jun 2019
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	18 Mar 2020
Preamplifier	Com-Power	PA-103	161040	1-1000MHz	16 May 2019
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal on use
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal on use

6.8. Rx Radiated

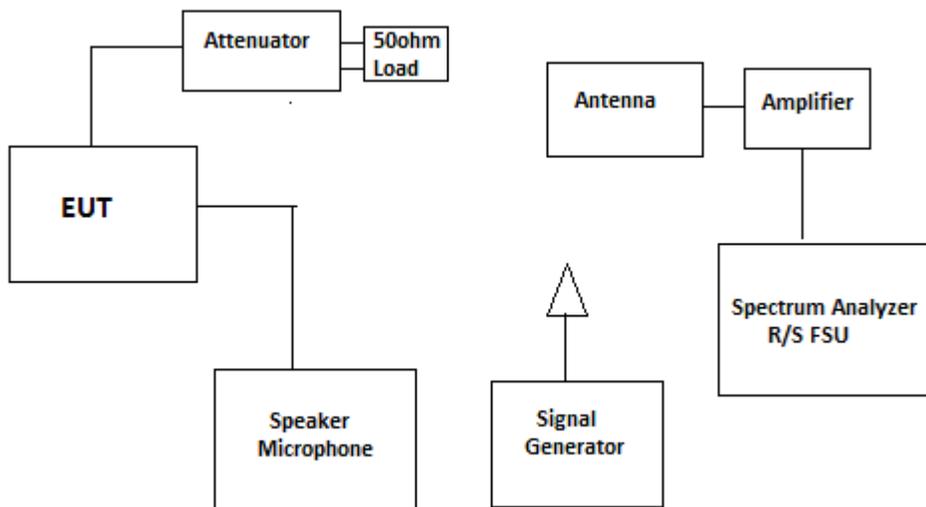

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	06 Oct 2019
Bicon Antenna	ETS	3110B	3379	30-200MHz	06 Feb 2020
Log Periodic Antenna	ETS	3148	00023845	200-2000MHz	02 Aug 2020
Horn Antenna	ETS	3117	00119425	1-18GHz	29 Jun 2019
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	18 Mar 2020
Preamplifier	Com-Power	PA-103	161040	1-1000MHz	16 May 2019
Signal Generator	Marconi	2024	112255/164	9KHz-2.4GHz	29 Aug 2019
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal on use

6.9. Frequency Stability

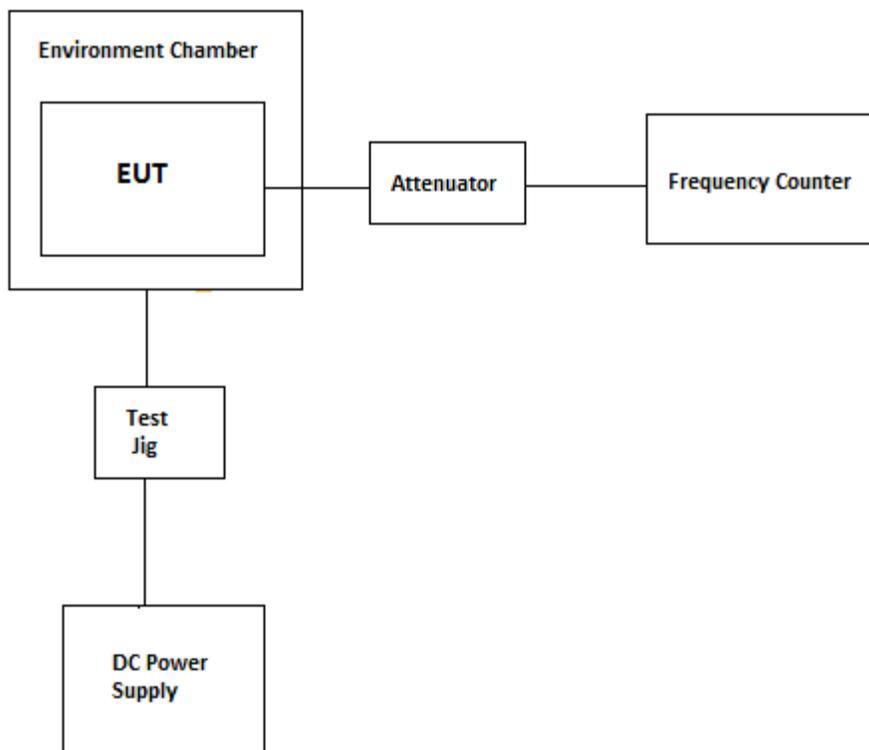

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Environmental Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 to 177° C	15 Jun 2019
Frequency Counter	EIP	545A	2683	10MHz-1GHz	07 Aug 2020
Attenuator(20dB)	Aeroflex\Weinschel	34-20-34	BP6023	DC-18GHz	Cal on use
Attenuator(20dB)	Narda	26298	A577	DC-1GHz	Cal on use
Multimeter	Fluke	8842A	5021295	---	23 Oct 2019
Power Supply	Tenma	72-7295	490300297	1-40V, DC 5A	----

EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement.

7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

	Radiated Emission Measurement Uncertainty @ 3m, Horizontal (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.15	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.30	± 5.2

	Radiated Emission Measurement Uncertainty @ 3m, Vertical (30-1000 MHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 2.14	± 2.6
U	Expanded uncertainty U: $U = 2u_c(y)$	± 4.29	± 5.2

	Radiated Emission Measurement Uncertainty @ 3 m, Horizontal & Vertical (1 – 18 GHz):	Measured	Limit
u_c	Combined standard uncertainty: $u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)}$	± 1.52	Under consideration
U	Expanded uncertainty U: $U = 2u_c(y)$	± 3.04	Under consideration

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = \text{Tx on} / (\text{Tx on} + \text{Tx off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = \text{A} + \text{G} + 10\log(1/x)$$

{ X = 1 for continuous transmission => $10\log(1/x) = 0 \text{ dB}$ }

Figure 1.

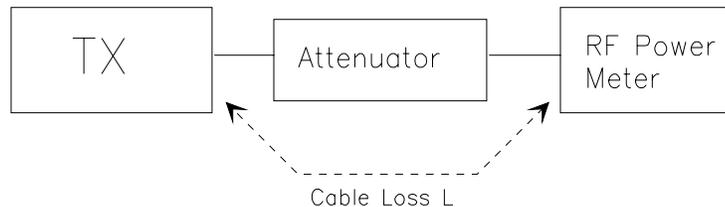

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. Maximizing RF Emission Level (E-Field)

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 kHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions Using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 10 kHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.

(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):

- ◆ DIPOLE antenna for frequency from 30-1000 MHz or
- ◆ HORN antenna for frequency above 1 GHz }.

(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.

(f) Use one of the following antenna as a receiving antenna:

- ◆ DIPOLE antenna for frequency from 30-1000 MHz or
- ◆ HORN antenna for frequency above 1 GHz }.

(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.

(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.

(i) Tune the EMI Receivers to the test frequency.

(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.

(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$\text{EIRP} = P + G1 = P3 + L2 - L1 + A + G1$$

$$\text{ERP} = \text{EIRP} - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)

(p) Repeat step (d) to (o) for different test frequency

(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.

(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


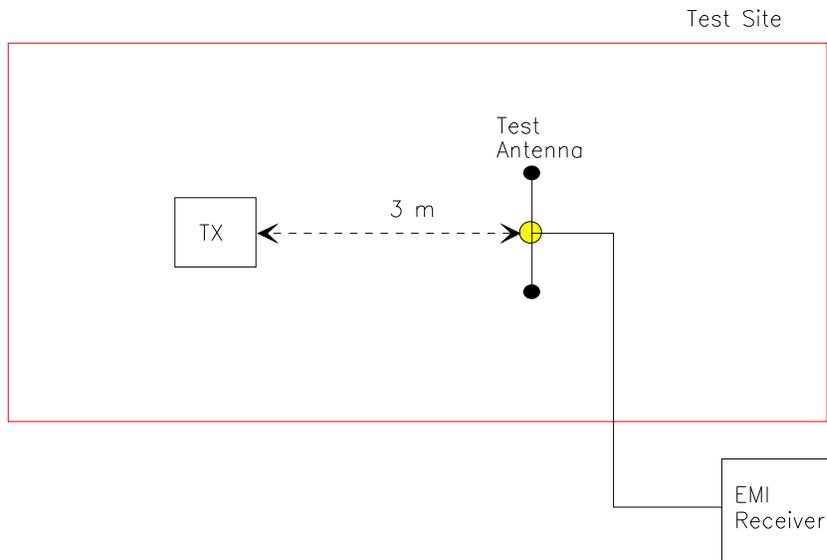


Figure 3

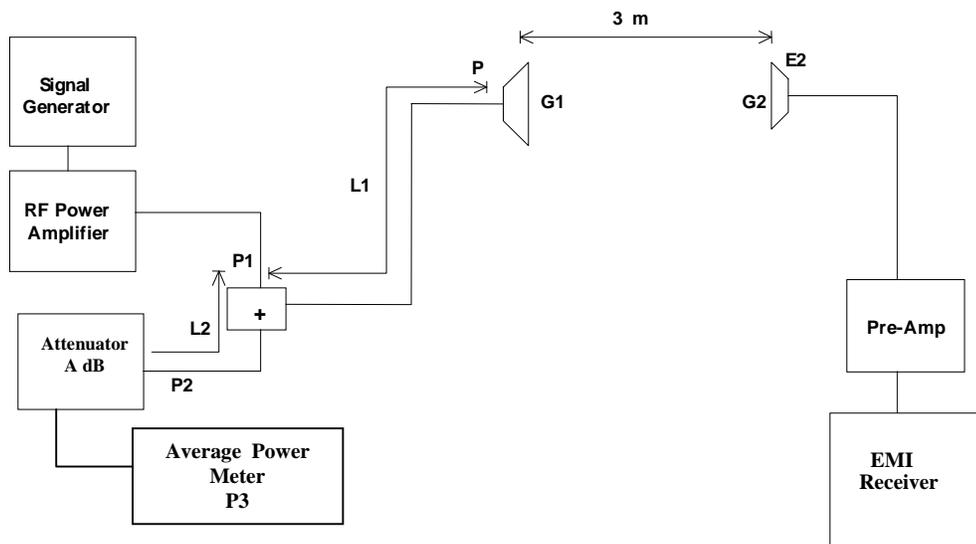

8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

8.4. EMISSION LIMITATIONS

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 kHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 kHz or 6.25 kHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 kHz minimum , VBW \geq RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC CFR 47, Para. 2.1057 - Frequency spectrum to be investigated:- The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC CFR 47, Para. 2.1051 - Spurious Emissions at Antenna Terminal:- The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.