


ENGINEERING TEST REPORT



VHF MARINE TRANSCEIVER
Model No.: IC-M85UL
FCC ID: AFJ398010

Applicant:

ICOM Incorporated
1-1-32, Kamiminami, Hirano-ku
Osaka, Japan, 547-0003

Tested in Accordance With

Federal Communications Commission (FCC)
47 CFR, Parts 2, 22, 74, 80 and 90 (Subpart I)

UltraTech's File No.: 22ICOM590_FCC90

This Test report is Issued under the Authority of
Tri M. Luu, BAsC,
Vice President of Engineering
UltraTech Group of Labs

Date: September 26, 2022

Report Prepared by: Santhosh Fernandez

Tested by: Nimisha Desai

Issued Date: September 26, 2022

Test Dates: September 13-23, 2022

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by any agency of the US Government.*
- *This test report shall not be reproduced, except in full, without a written approval from UltraTech.*

UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4
Tel.: (905) 829-1570 Fax.: (905) 829-8050
Website: www.ultratech-labs.com, Email: vic@ultratech-labs.com, Email: tri@ultratech-labs.com



APEC TEL
CA0001



1309



46390-2049



AT-1945



SL2-IN-E-
1119R



Korea
KCC-RRR
CA0001

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION	1
1.1. SCOPE.....	1
1.2. RELATED SUBMITTAL(S)/GRANT(S).....	1
1.3. NORMATIVE REFERENCES.....	1
EXHIBIT 2. PERFORMANCE ASSESSMENT.....	2
2.1. CLIENT INFORMATION	2
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	2
2.3. EUT'S TECHNICAL SPECIFICATIONS	3
2.4. LIST OF EUT'S PORTS.....	4
2.5. ANCILLARY EQUIPMENT	4
EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....	5
3.1. CLIMATE TEST CONDITIONS	5
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	5
EXHIBIT 4. SUMMARY OF TEST RESULTS	6
4.1. LOCATION OF TESTS	6
4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS.....	6
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES.....	6
EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS	7
5.1. TEST PROCEDURES	7
5.2. MEASUREMENT UNCERTAINTIES.....	7
5.3. MEASUREMENT EQUIPMENT USED.....	7
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER	7
5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205]	8
5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(A), 80.213(E) & 90.242(B)(8)].....	9
5.7. MODULATION LIMITING [§§ 2.1047 (B), 74.463, 80.213 & 90.210].....	16
5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(F), 90.209 & 90.210].....	23
5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(F)(3) & 90.210]	59
5.10. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(F)(3) & 90.210]	84
5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213]	86
5.12. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(C)] [RSS-119 § 5.9]	88
5.13. SUPPRESSION OF INTERFERENCE ABOARD SHIPS [§ FCC 80.217].....	93
EXHIBIT 6. TEST EQUIPMENT LIST AND SETUP	98
6.1. CONDUCTED POWER.....	98
6.2. MODULATION LIMIT.....	99
6.3. AUDIO FREQUENCY RESPONSE.....	100
6.4. TRANSIENT FREQUENCY BEHAVIOR.....	101
6.5. 99% OBW AND MASK	102
6.6. TX CONDUCTED EMISSION	103
6.7. RX CONDUCTED EMISSION	104
6.8. TX RADIATED	105
6.9. FREQUENCY STABILITY	106

6.10. SUPPRESSION OF INTERFERENCE ABOARD SHIPS 107

EXHIBIT 7. MEASUREMENT UNCERTAINTY 108

EXHIBIT 8. MEASUREMENT METHODS 109

8.1. CONDUCTED POWER MEASUREMENTS 109

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD 110

8.3. FREQUENCY STABILITY 113

8.4. EMISSION MASK 114

8.5. SPURIOUS EMISSIONS (CONDUCTED) 114

8.6. TRANSIENT FREQUENCY BEHAVIOR 115

EXHIBIT 1. INTRODUCTION

1.1. SCOPE

Reference:	FCC Parts 2, 22, 74, 80 and 90 (Subpart I)
Title:	Code of Federal Regulations (CFR), Title 47 Telecommunication – Parts 2, 22, 74, 80 and 90 (Subpart I)
Purpose of Test:	To obtain FCC Certification Authorization for Radio operating in the Frequency Band 136-174 MHz.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with TIA/EIA Standard TIA/EIA-603-E – Land Mobile FM or PM Communications Equipment Measurement and performance Standards.

1.2. RELATED SUBMITTAL(S)/GRANT(S)

None

1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 0-19, 80-End	2021	Code of Federal Regulations – Telecommunication
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
TIA/EIA 603, Edition E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ANSI C63.26	2015	American National Standard for Compliance Testing of Transmitters used in Licensed Radio Services
CISPR 16-1-1 +A1 +A2	2006 2006 2007	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-1-2 +A1 +A2	2003 2004 2006	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-2: Conducted disturbances
RSS-182, Issue 6	2021	Maritime Radio Equipment Operating in the 156-162.5 MHz Band
RSS-Gen, Issue 5	2018	General Requirements for Compliance of Radio Apparatus
TIA/EIA 603, Edition E	2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
ICES-003, Issue 7	2020	Information Technology Equipment (including Digital Apparatus)
ITU-R M.493-15	2019	Digital selective-calling system for use in the maritime mobile service
RSS-119, Issue 12	2015	Land Mobile and Fixed Transmitters and Receivers, 27.41-960 MHz

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1. CLIENT INFORMATION

APPLICANT	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

MANUFACTURER	
Name:	Icom Incorporated
Address:	1-1-32, Kamiminami Hirano-ku, Osaka Japan, 547-0003
Contact Person:	Mr. Atsushi Tomiyama Phone #: +81 6 6793 5302 Fax #: +81 6 6793 0013 Email Address: world_support@icom.co.jp

2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The applicant has supplied the following information (with the exception of the Date of Receipt).

Brand Name:	ICOM Incorporated
Product Name:	VHF MARINE TRANSCEIVER
Model Name or Number:	IC-M85UL
Serial Number:	00000303
Type of Equipment:	Licensed Non-Broadcast Station Transmitter
Power Supply Requirement:	7.2 VDC nominal
Transmitting/Receiving Antenna Type:	Non-integral
Primary User Functions of EUT:	2-Way Wireless Communication

2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
Equipment Type:	Portable
Intended Operating Environment:	Restricted to Occupational Use only
Power Supply Requirement:	7.2 VDC nominal
RF Output Power Rating:	5 Watt (High) / 3 Watt (Med)/1 Watt (Low) for marine (Part 80 only 156.025 MHz- 157.425 MHz) 2 Watt (High) / 1 Watt (Low) For LMR
Operating Frequency Range:	136-174 MHz
RF Output Impedance:	50 Ω
Channel Spacing:	25 kHz, 12.5 kHz
Occupied Bandwidth (99%):	15.31 kHz (for 25 kHz Analog) LMR 5.61 kHz (for 12.5 kHz Analog) LMR 15.31 kHz for Marine
Emission Designation*:	Analog:16K0F3E**, 11K0F3E for LMR Analog:16K0G3E ,for marine only(Part 80 only)
<p>* For an average case of commercial telephony, the Necessary Bandwidth is calculated as follows:</p> <p>For FM Voice Modulation: Channel Spacing = 25 KHz, D = 5 KHz max, K = 1, M = 3 KHz $B_n = 2M + 2DK = 2(3) + 2(5)(1) = \mathbf{16\ KHz}$ Emission designation: 16K0F3E</p> <p>Channel Spacing = 12.5 KHz, D = 2.5 KHz max, K = 1, M = 3 KHz $B_n = 2M + 2DK = 2(3) + 2(2.5)(1) = \mathbf{11\ KHz}$ Emission designation: 11K0F3E</p> <p>**Note: The emission designation 16K0F3E with 25 KHz Channel bandwidth is applied for Part 90 to the device since it is 2W handheld.</p>	

2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Terminated with
1	Speaker-Microphone Connector	1	ICOM Multi-connector Jack	Speaker-Microphone
2	Antenna Connector	1	Screw	50 Ohm Load

2.5. ANCILLARY EQUIPMENT

The EUT was tested while connected to the following representative configuration of ancillary equipment necessary to exercise the ports during tests:

Ancillary Equipment # 1	
Description:	Speaker Microphone
Brand Name:	Icom Inc.
Model Name or Number:	HM-184UL

EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C - 24°C
Humidity:	45% to 58%
Pressure:	102 kPa
Power Input Source:	7.2 VDC Nominal

3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

Operating Modes:	The transmitter was operated in a continuous transmission mode with the carrier modulated as specified in the Test Data.
Special Test Software:	N/A
Special Hardware Used:	N/A
Transmitter Test Antenna:	The EUT is tested with the antenna port terminated to a 50 Ohm RF Load.

Transmitter Test Signals	
Frequency Band(s):	136-174 MHz LMR at 2W 156.025-157.425 MHz for Marine at 5W.
Test Frequencies: (Near lowest, near middle & near highest frequencies in the frequency range of operation.)	Mode 1: LMR 2W/1W 138.1 MHz, 151.1 MHz, 157.425 MHz, 173.3 MHz Mode 2: Marine only 5W/1W 156.05 MHz and 157.425 MHz
Transmitter Wanted Output Test Signals: Transmitter Power (measured maximum output power): Normal Test Modulation: Modulating signal source:	1.79 W for LMR 5.04 W for Marine only Variable reactance frequency modulation External

EXHIBIT 4. SUMMARY OF TEST RESULTS

4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with ANAB File No.: AT-1945.

4.2. APPLICABILITY & SUMMARY OF EMISSION TEST RESULTS

4.2.1. FCC SUMMARY

FCC Section(s)	Test Requirements	Applicability (Yes/No)
1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes, Refer to SAR Report
2.1046, 22.565, 74.461, 80.215 & 90.205	RF Power Output	Yes
2.1047(a), 80.213(e) & 90.242(b)(8)	Audio Frequency Response	Not applicable to new standard. However, tests are conducted under FCC's recommendation.
2.1047(b), 74.463, 80.213 & 90.210	Modulation Limiting	Yes
2.1049, 74.462, 80.211(f), 90.209 & 90.210	Emission Limitation & Emission Mask	Yes
2.1051, 2.1057, 80.211(f)(3), & 90.210	Emission Limits - Spurious Emissions at Antenna Terminal	Yes
2.1053, 2.1057, 22.359, 80.211(f)(3), & 90.210	Emission Limits - Field Strength of Spurious Emissions	Yes
2.1055, 22.355, 74.464, 80.209 & 90.213	Frequency Stability	Yes
74.462(c) & 90.214	Transient Frequency Behavior	Yes
80.217	Suppression of Interference aboard ships	Yes
VHF MARINE TRANSCEIVER, Model No.: IC-M85UL, by ICOM Incorporated has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Digital Devices. The engineering test report has been documented and kept on file and is available upon request.		

4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

4.3.1. DEVIATION OF STANDARD TEST PROCEDURES

None

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90
September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS

5.1. TEST PROCEDURES

This section contains test results only. Details of test methods and procedures can be found in EXHIBIT 8 of this report.

5.2. MEASUREMENT UNCERTAINTIES

The measurement uncertainties stated were calculated in accordance with the requirements of CISPR 16-4-2 @ IEC:2003 and JCGM 100:2008 (GUM 1995) – Guide to the Expression of Uncertainty in Measurement. Refer to Exhibit 7 for Measurement Uncertainties.

5.3. MEASUREMENT EQUIPMENT USED

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER

The essential function of the EUT is to communicate to and from radios over RF link.

5.5. RF POWER OUTPUT [§§ 2.1046, 22.565, 74.461, 80.215 & 90.205]

5.5.1. Limits

Please refer to FCC 47 CFR 90.205, 74.461, 80.215 & 22.565 for specification details.

5.5.2. Method of Measurements

Refer to Section 8.1 (Conducted) and 8.2 (Radiated) of this report for measurement details

5.5.3. Test Data

5.5.3.1. LMR

Channel	Frequencies MHz	Wide/ Narrow	Power Rating Watts	Actual Power Watts
A5	138.100	N	2.00	1.75
A5	138.100	N	1.00	0.76
A6	151.100	N	2.00	1.76
A6	151.100	N	1.00	0.77
A7	157.425	N	2.00	1.71
A7	157.425	N	1.00	0.74
A8	173.300	N	2.00	1.79
A8	173.300	N	1.00	0.79

5.5.3.2. Marine (Part 80 only)

Channel	Frequencies MHz	Wide/ Narrow	Power Rating Watts	Actual Power Watts
01A	156.050	W	5.00	5.04
01A	156.050	W	3.00	3.07
01A	156.050	W	1.00	0.77
88	157.425	W	5.00	4.98
88	157.425	W	3.00	2.99
88	157.425	W	1.00	0.74

5.6. AUDIO FREQUENCY RESPONSE [§ 2.1047(a), 80.213(e) & 90.242(b)(8)]

5.6.1. Limits

§ 2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

§ 80.213 (e) Coast station transmitters operated in the 156–162 MHz band must be equipped with an audio low-pass filter. The filter must be installed between the modulation limiter and the modulated radio frequency stage. At frequencies between 3 kHz and 20 kHz it must have an attenuation greater than at 1 kHz by at least $60\log_{10}(f/3)$ dB where “f” is the audio frequency in kilohertz. At frequencies above 20 kHz the attenuation must be at least 50 dB greater than at 1 kHz

§ 90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 kHz Attenuation
3 –20 KHz	$60 \log_{10}(f/3)$ dB where f is in kHz
20 – 30 KHz	50dB

5.6.2. Method of Measurements

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

5.6.3. Test Data

LMR

5.6.3.1. 12.5 KHz Channel Spacing

Remark: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 kHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-35.65	-28.18	7.5	-28.6	--
0.3	-35.65	-11.94	23.7	-12.4	--
0.4	-35.65	-8.54	27.1	-9.0	--
0.6	-35.65	-4.47	31.2	-4.9	--
0.8	-35.65	-1.64	34.0	-2.1	--
1.0	-35.65	0.45	36.1	0.0	--
1.5	-35.65	3.57	39.2	3.1	--
2.0	-35.65	3.61	39.3	3.2	--
2.5	-35.65	1.78	37.4	1.3	--
3.0	-35.65	-1.47	34.2	-1.9	0
3.5	-35.65	-6.34	29.3	-6.8	-4
4.0	-35.65	-10.60	25.1	-11.0	-7
4.5	-35.65	-14.51	21.1	-15.0	-11
5.0	-35.65	-17.82	17.8	-18.3	-13
6.0	-35.65	-23.68	12.0	-24.1	-18
7.0	-35.65	-28.49	7.2	-28.9	-22
8.0	-35.65	-32.64	3.0	-33.1	-26
9.0	-35.65	-36.63	-1.0	-37.1	-29
10.0	-35.65	-40.58	-4.9	-41.0	-31
12.0	-35.65	-45.65	-10.0	-46.1	-36
14.0	-35.65	-54.09	-18.4	-54.5	-40
16.0	-35.65	-60.00	-24.4	-60.4	-44
18.0	-35.65	-70.00	-34.4	-70.4	-47
20.0	-35.65	-70.00	-34.4	-70.4	-50
25.0	-35.65	-70.00	-34.4	-70.4	-50
30.0	-35.65	-70.00	-34.4	-70.4	-50
35.0	-35.65	-70.00	-34.4	-70.4	-50
40.0	-35.65	-70.00	-34.4	-70.4	-50
45.0	-35.65	-70.00	-34.4	-70.4	-50
50.0	-35.65	-70.00	-34.4	-70.4	-50

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Audio Frequency Response 12.5 kHz Channel Spacing

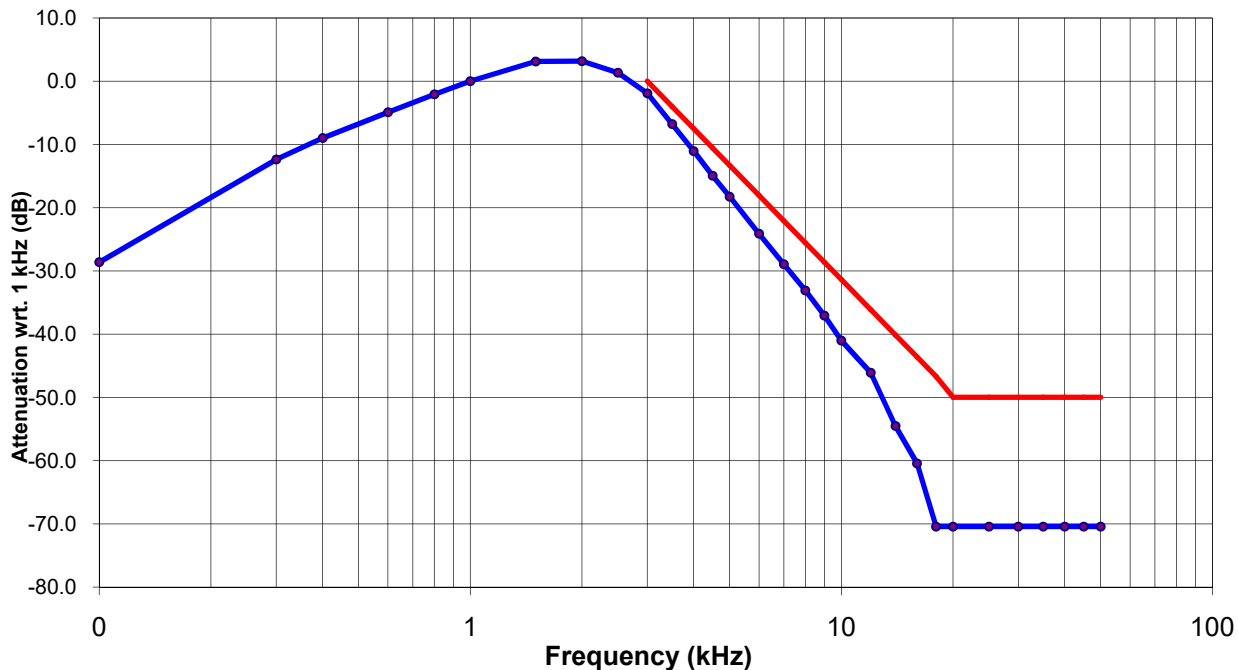

5.6.3.2. 25 KHz Channel Spacing

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-35.92	-21.85	14.1	-28.5	--
0.3	-35.92	-4.85	31.1	-11.5	--
0.4	-35.92	-1.76	34.2	-8.5	--
0.6	-35.92	2.19	38.1	-4.5	--
0.8	-35.92	4.75	40.7	-1.9	--
1.0	-35.92	6.69	42.6	0.0	--
1.5	-35.92	9.15	45.1	2.5	--
2.0	-35.92	9.43	45.4	2.7	--
2.5	-35.92	9.16	45.1	2.5	--
3.0	-35.92	7.93	43.9	1.2	0
3.5	-35.92	5.78	41.7	-0.9	-4
4.0	-35.92	2.73	38.7	-4.0	-7
4.5	-35.92	-0.46	35.5	-7.2	-11
5.0	-35.92	-3.34	32.6	-10.0	-13
6.0	-35.92	-8.77	27.2	-15.5	-18
7.0	-35.92	-13.58	22.3	-20.3	-22
8.0	-35.92	-17.69	18.2	-24.4	-26
9.0	-35.92	-21.42	14.5	-28.1	-29
10.0	-35.92	-24.72	11.2	-31.4	-31
12.0	-35.92	-30.51	5.4	-37.2	-36
14.0	-35.92	-36.43	-0.5	-43.1	-40
16.0	-35.92	-48.85	-12.9	-55.5	-44
18.0	-35.92	-52.75	-16.8	-59.4	-47
20.0	-35.92	-65.00	-29.1	-71.7	-50
25.0	-35.92	-70.00	-34.1	-76.7	-50
30.0	-35.92	-70.00	-34.1	-76.7	-50
35.0	-35.92	-70.00	-34.1	-76.7	-50
40.0	-35.92	-70.00	-34.1	-76.7	-50
45.0	-35.92	-70.00	-34.1	-76.7	-50
50.0	-35.92	-70.00	-34.1	-76.7	-50

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Audio Frequency Response 25 kHz Channel Spacing

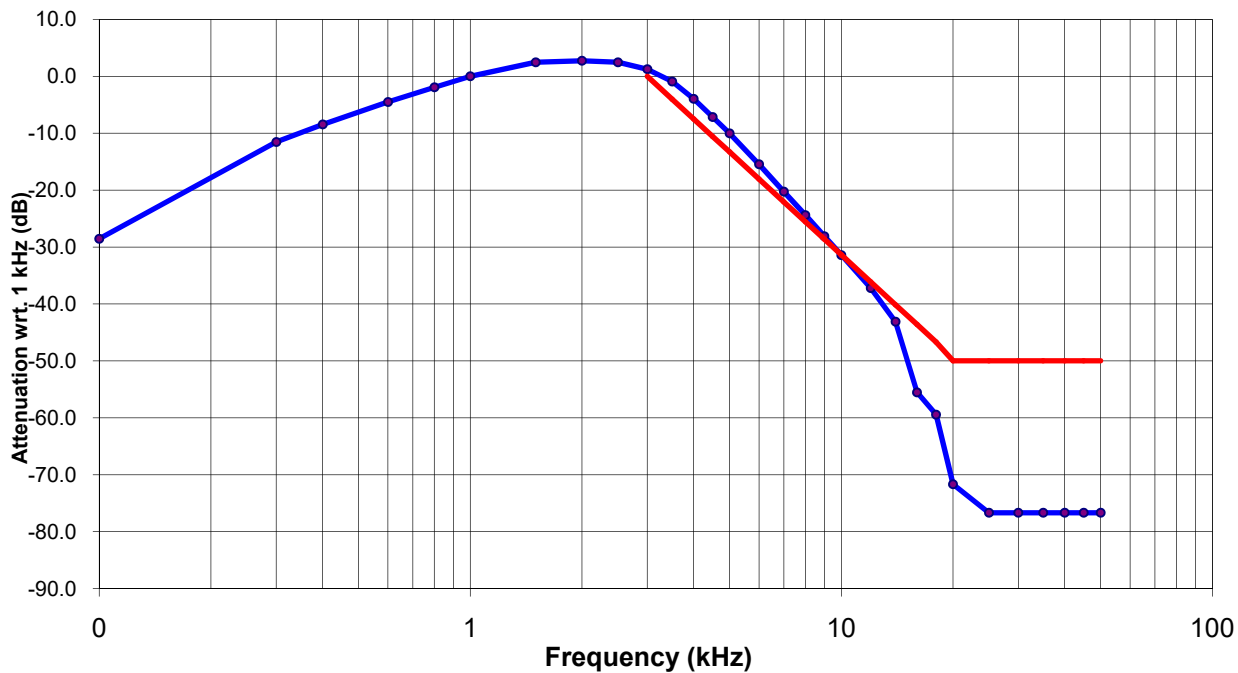

Marine

5.6.3.3. 25 KHz Channel Spacing

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-35.92	-22.38	13.5	-29.0	--
0.2	-35.92	-10.06	25.9	-16.7	--
0.4	-35.92	-1.80	34.1	-8.4	--
0.6	-35.92	2.07	38.0	-4.6	--
0.8	-35.92	4.67	40.6	-2.0	--
1.0	-35.92	6.64	42.6	0.0	--
1.5	-35.92	9.14	45.1	2.5	--
2.0	-35.92	9.43	45.4	2.8	--
2.5	-35.92	9.17	45.1	2.5	--
3.0	-35.92	7.98	43.9	1.3	0
3.5	-35.92	5.86	41.8	-0.8	-4
4.0	-35.92	2.83	38.8	-3.8	-7
4.5	-35.92	-0.35	35.6	-7.0	-11
5.0	-35.92	-3.26	32.7	-9.9	-13
6.0	-35.92	-8.67	27.3	-15.3	-18
7.0	-35.92	-13.52	22.4	-20.2	-22
8.0	-35.92	-17.66	18.3	-24.3	-26
9.0	-35.92	-21.27	14.7	-27.9	-29
10.0	-35.92	-24.42	11.5	-31.1	-31
12.0	-35.92	-30.52	5.4	-37.2	-36
14.0	-35.92	-37.21	-1.3	-43.9	-40
16.0	-35.92	-44.37	-8.5	-51.0	-44
18.0	-35.92	-52.76	-16.8	-59.4	-47
20.0	-35.92	-65.00	-29.1	-71.6	-49
22.0	-35.92	-70.00	-34.1	-76.6	-50
25.0	-35.92	-70.00	-34.1	-76.6	-50
30.0	-35.92	-70.00	-34.1	-76.6	-50
35.0	-35.92	-70.00	-34.1	-76.6	-50
40.0	-35.92	-70.00	-34.1	-76.6	-50
45.0	-35.92	-70.00	-34.1	-76.6	-50

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

FCC Audio Frequency Response 25 kHz Channel Spacing

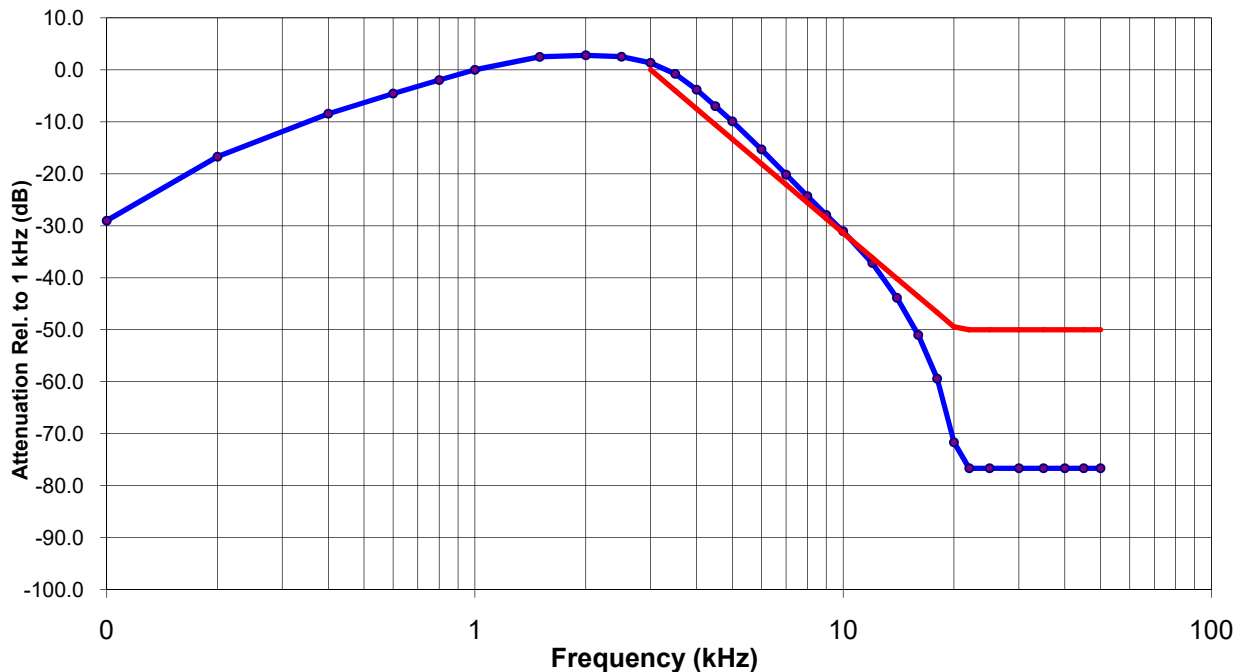

5.7. MODULATION LIMITING [§§ 2.1047 (b), 74.463, 80.213 & 90.210]

5.7.1. Limits

§ 2.1047(b): Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

Recommended frequency deviation characteristics are given below:

- 1.25 KHz for 6.25 kHz Channel Spacing System
- 2.5 KHz for 12.5 kHz Channel Spacing System
- § 80.213 (a)(2) When phase or frequency modulation is used in the 156-162 MHz band the peak modulation must be maintained between 75 and 100 percent. A frequency deviation of ± 5 kHz is defined as 100 percent peak modulation; and
-
- § 80.213 (b) Radiotelephone transmitters using A3E, F3E and G3E emission must have a modulation limiter to prevent any modulation over 100 percent. This requirement does not apply to survival craft transmitters, to transmitters that do not require a license or to transmitters whose output power does not exceed 3 watts.
-
- § 80.213 (d) Ship and coast station transmitters operating in the 156-162 MHz and 216-220 bands must be capable of proper operation with a frequency deviation that does not exceed ± 5 kHz when using any emission authorized by Sec. 80.207.

5.7.2. Method of Measurements

For Audio Transmitter: The carrier frequency deviation was measured with the tone input signal level varied from 0 Vp to audio input rating level plus 16 dB at frequencies 0.1, 0.5, 1.0, 3.0 and 5.0 kHz. The maximum deviation was recorded at each test condition.

For Data Transmitter with Maximum Frequency Deviation set by Factory: The EUT was set at maximum frequency deviation, and its peak frequency deviation was then measured using EUT's internal random data source.

5.7.3. Test Data

LMR

5.7.3.1. Voice Modulation Limiting for 12.5 KHz Channel Spacing Operation

Modulating Signal Level (mVrms)	Peak Frequency Deviation (kHz)					Maximum Limit (kHz)
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
2	0.06	0.13	0.24	0.36	0.13	2.5
4	0.06	0.21	0.39	0.66	0.19	2.5
6	0.07	0.29	0.59	0.94	0.22	2.5
8	0.08	0.36	0.76	1.15	0.22	2.5
10	0.08	0.43	0.92	1.19	0.22	2.5
15	0.10	0.63	1.36	1.21	0.21	2.5
20	0.12	0.86	1.80	1.21	0.22	2.5
25	0.15	1.06	2.05	1.21	0.21	2.5
30	0.16	1.26	2.15	1.22	0.21	2.5
35	0.16	1.47	2.16	1.21	0.21	2.5
40	0.19	1.64	2.15	1.21	0.21	2.5
45	0.22	1.67	2.15	1.21	0.21	2.5
50	0.23	1.63	2.15	1.21	0.21	2.5
60	0.26	2.03	2.15	1.21	0.21	2.5
70	0.31	2.17	2.13	1.21	0.21	2.5
80	0.35	2.12	2.13	1.20	0.21	2.5
90	0.38	2.07	2.14	1.20	0.21	2.5
100	0.43	2.00	2.15	1.20	0.21	2.5

Voice Signal Input Level = STD MOD Level + 16 dB = 16.5 mVrms + 16 dB = 40.35 dB(mVrms) = 104.11 mVrms		
Modulation Frequency (kHz)	Peak Deviation (kHz)	Maximum Limit (kHz)
0.1	0.43	2.5
0.2	1.61	2.5
0.4	1.95	2.5
0.6	2.19	2.5
0.8	2.19	2.5
1.0	2.17	2.5
1.2	2.13	2.5
1.4	2.15	2.5
1.6	2.19	2.5
1.8	2.21	2.5
2.0	2.14	2.5
2.5	1.74	2.5
3.0	1.20	2.5
3.5	0.69	2.5
4.0	0.44	2.5
4.5	0.29	2.5
5.0	0.21	2.5
6.0	0.12	2.5
7.0	0.08	2.5
8.0	0.06	2.5
9.0	0.05	2.5
10.0	0.04	2.5

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.7.3.2. Voice Modulation Limiting for 25 KHz Channel Spacing Operation

Modulating Signal Level (mVrms)	Peak Frequency Deviation (kHz)					Maximum Limit (kHz)
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
2	0.08	0.24	0.44	1.019	0.45	5.0
4	0.09	0.42	0.81	1.89	0.82	5.0
6	0.11	0.59	1.19	2.79	0.98	5.0
8	0.13	0.78	1.59	3.48	1.00	5.0
10	0.14	0.96	1.91	3.55	1.00	5.0
15	0.18	1.41	2.85	3.57	1.00	5.0
20	0.21	1.88	3.63	3.58	1.00	5.0
25	0.26	2.35	3.92	3.58	1.00	5.0
30	0.31	2.81	4.13	3.58	1.00	5.0
35	0.36	3.24	4.15	3.57	1.00	5.0
40	0.39	3.60	4.15	3.57	1.00	5.0
45	0.45	3.66	4.15	3.57	1.00	5.0
50	0.48	3.68	4.15	3.57	1.00	5.0
60	0.57	3.80	4.14	3.57	1.00	5.0
70	0.67	4.13	4.11	3.57	1.00	5.0
80	0.76	3.98	4.11	3.57	1.00	5.0
90	0.83	3.93	4.12	3.58	1.00	5.0
100	0.91	3.87	4.15	3.58	1.00	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Voice Signal Input Level = STD MOD Level + 16 dB
=16 mV+16dB
=40.08 dB(mVrms)
= 100.95 mVrms

Modulation Frequency (kHz)	Peak Deviation (kHz)	Maximum Limit (kHz)
0.1	0.92	5.0
0.2	3.30	5.0
0.4	3.92	5.0
0.6	4.17	5.0
0.8	4.13	5.0
1.0	4.13	5.0
1.2	4.09	5.0
1.4	4.05	5.0
1.6	4.03	5.0
1.8	4.05	5.0
2.0	4.08	5.0
2.5	4.07	5.0
3.0	3.58	5.0
3.5	2.82	5.0
4.0	1.99	5.0
4.5	1.39	5.0
5.0	0.99	5.0
6.0	0.55	5.0
7.0	0.33	5.0
8.0	0.22	5.0
9.0	0.15	5.0
10.0	0.11	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Marine

5.7.3.3. Voice Modulation Limiting for 25 KHz Channel Spacing Operation

Modulating Signal Level (mVrms)	Peak Frequency Deviation (kHz)					Maximum Limit (kHz)
	0.1 kHz	0.5 kHz	1.0 kHz	3.0 kHz	5.0 kHz	
2	0.06	0.24	0.43	1.00	0.45	5.0
4	0.08	0.41	0.81	1.89	0.81	5.0
6	0.09	0.60	1.19	2.78	0.97	5.0
8	0.12	0.78	1.58	3.43	0.98	5.0
10	0.14	0.94	1.91	3.52	0.99	5.0
15	0.17	1.40	2.84	3.55	0.99	5.0
20	0.22	1.89	3.63	3.55	0.99	5.0
25	0.27	2.34	3.91	3.55	0.98	5.0
30	0.30	2.80	4.10	3.55	0.98	5.0
35	0.34	3.26	4.13	3.55	0.98	5.0
40	0.38	3.60	4.12	3.54	0.98	5.0
45	0.43	3.65	4.12	3.54	0.98	5.0
50	0.48	3.68	4.12	3.54	0.98	5.0
60	0.56	3.79	4.11	3.54	0.98	5.0
70	0.67	4.12	4.08	3.54	0.98	5.0
80	0.74	3.98	4.08	3.54	0.98	5.0
90	0.81	3.92	4.09	3.54	0.98	5.0
100	0.91	3.86	4.12	3.54	0.98	5.0

Voice Signal Input Level = STD MOD Level + 16 dB
=16 mV+16dB
= 40.08 dB(mVrms)
=100.95 mVrms

Modulation Frequency (kHz)	Peak Deviation (kHz)	Maximum Limit (kHz)
0.1	0.93	5.0
0.2	3.43	5.0
0.4	3.93	5.0
0.6	4.16	5.0
0.8	4.13	5.0
1.0	4.13	5.0
1.2	4.09	5.0
1.4	4.04	5.0
1.6	4.02	5.0
1.8	4.04	5.0
2.0	4.08	5.0
2.5	4.06	5.0
3.0	3.55	5.0
3.5	2.79	5.0
4.0	1.97	5.0
4.5	1.37	5.0
5.0	0.98	5.0
6.0	0.54	5.0
7.0	0.33	5.0
8.0	0.22	5.0
9.0	0.15	5.0
10.0	0.11	5.0

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8. OCCUPIED BANDWIDTH & EMISSION MASK [§§ 2.1049, 74.462, 80.211(f), 90.209 & 90.210]

5.8.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

Frequency Range (MHz)	Maximum Authorized BW (KHz)	Channel Spacing (KHz)	Recommended Frequency Deviation (KHz)	FCC Applicable Mask
156-174, 421-512	11.25	12.5	2.5	Mask D – Voice & Data
156-174, 421-512	20	25	5.0	Mask B – Voice & Data
150-174, 421-512	6	6.25	1.25	Mask E – Voice & Data

§80.211(f) Emission limitations

Emissions shall be attenuated below the mean output power of the transmitter as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: At least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: At least 35 dB; and
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 plus $10\log_{10}$ (mean power in watts) dB.

5.8.2. Method of Measurements

Refer to Section 8.4 of this report for measurement details.

5.8.3. Test Data

5.8.3.1. 99% Occupied Bandwidth

5.8.3.1.1. LMR

Frequency (MHz)	Channel Spacing (kHz)	Modulation	Measured 99% OBW at Maximum Freq. Deviation (kHz)	Maximum Authorized Bandwidth (kHz)
138.1	25.0	FM with 2.5 KHz sine wave signal	15.31	20.0
151.1	25.0	FM with 2.5 KHz sine wave signal	14.81	20.0
157.425	25.0	FM with 2.5 KHz sine wave signal	14.81	20.0
173.3	25.0	FM with 2.5 KHz sine wave signal	14.81	20.0
138.1	12.5	FM with 2.5 KHz sine wave signal	5.53	11.25
151.1	12.5	FM with 2.5 KHz sine wave signal	5.61	11.25
157.425	12.5	FM with 2.5 KHz sine wave signal	5.61	11.25
173.3	12.5	FM with 2.5 KHz sine wave signal	5.61	11.25

5.8.3.1.2. Marine (part 80 only)

Frequency (MHz)	Channel Spacing (kHz)	Modulation	Measured 99% OBW at Maximum Freq. Deviation (kHz)	Maximum Authorized Bandwidth (kHz)
156.050	25.0	FM with 2.5 KHz sine wave signal	14.81	20.0
157.425	25.0	FM with 2.5 KHz sine wave signal	14.86	20.0


Note: 99% Occupied Bandwidth measurements were done using the built-in auto function of the analyzer.

Refer to the following test data plots for details.

LMR

5.8.3.1.3. Configuration: 99% OBW, CH A1 138.1MHz, 25 KHz, Analog, High power

OBW: 15.31 KHz

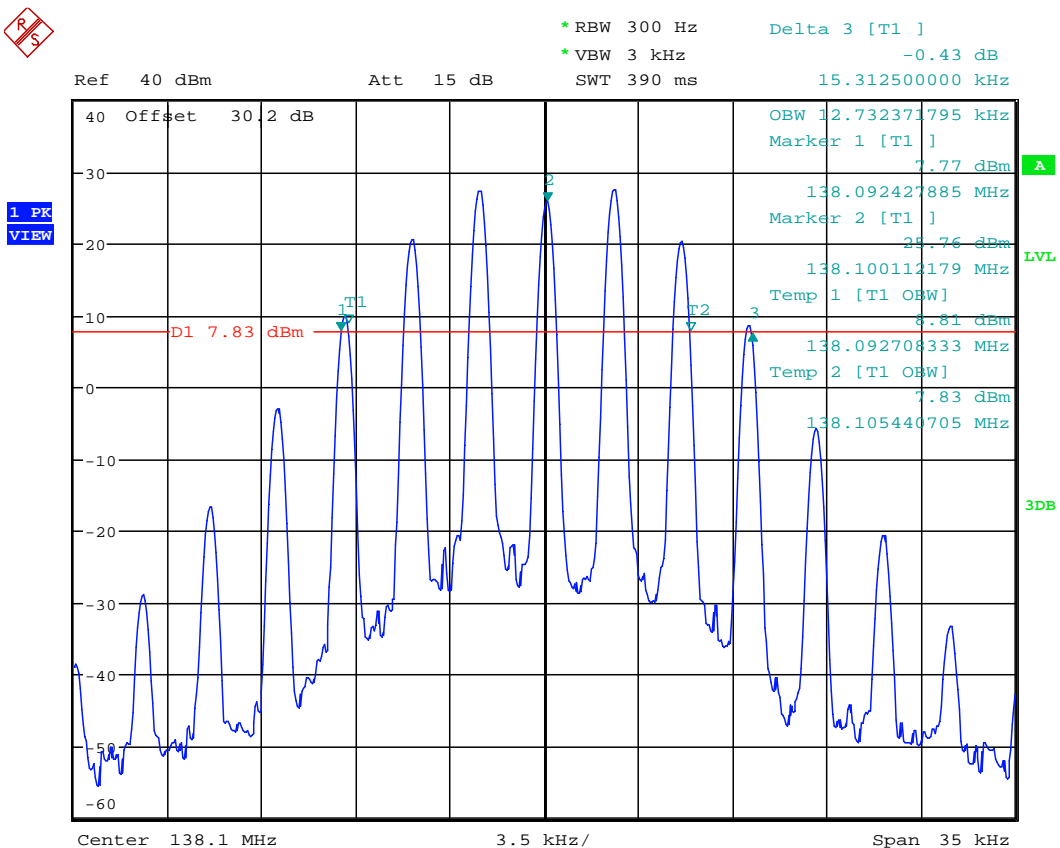

Date: 15.SEP.2022 12:55:10

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.8.3.1.4. Configuration: 99% OBW, CH A2 151.1MHz, 25 KHz, Analog, High power

OBW: 14.81 KHz

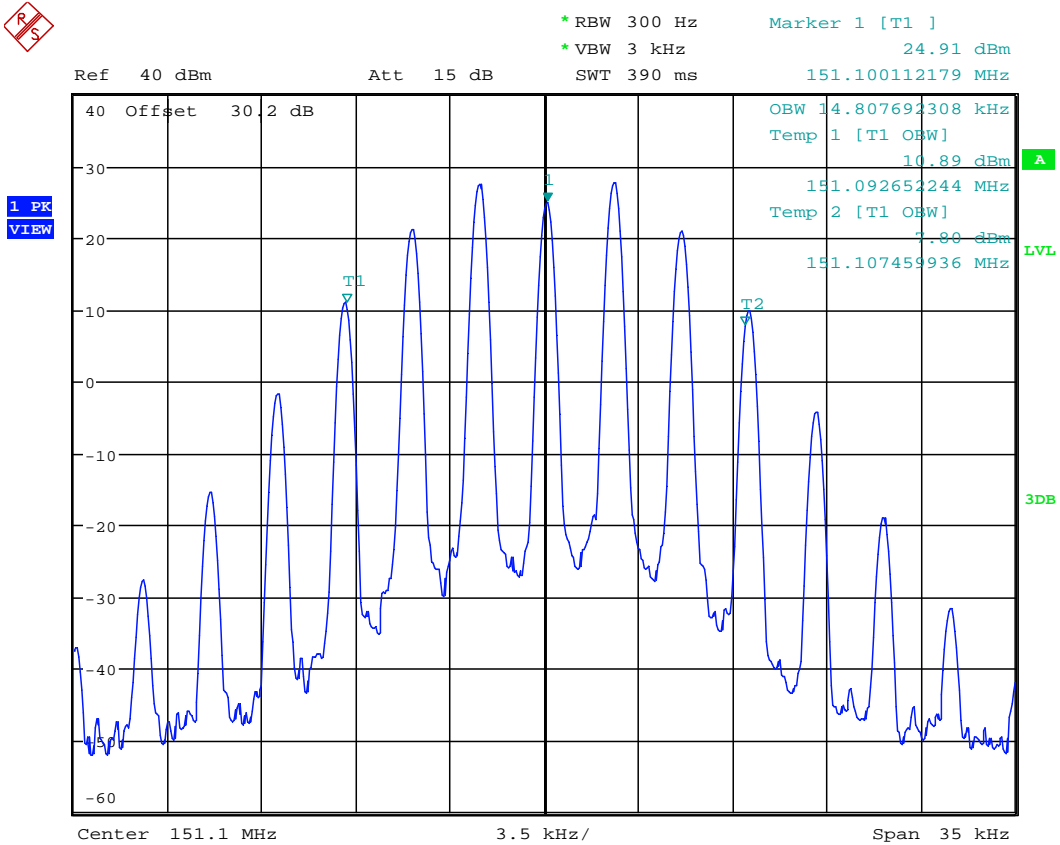

Date: 15.SEP.2022 12:56:45

5.8.3.1.5. Configuration: 99% OBW, CH A3 157.425MHz, 25 KHz, Analog, High power
OBW: 14.81 KHz

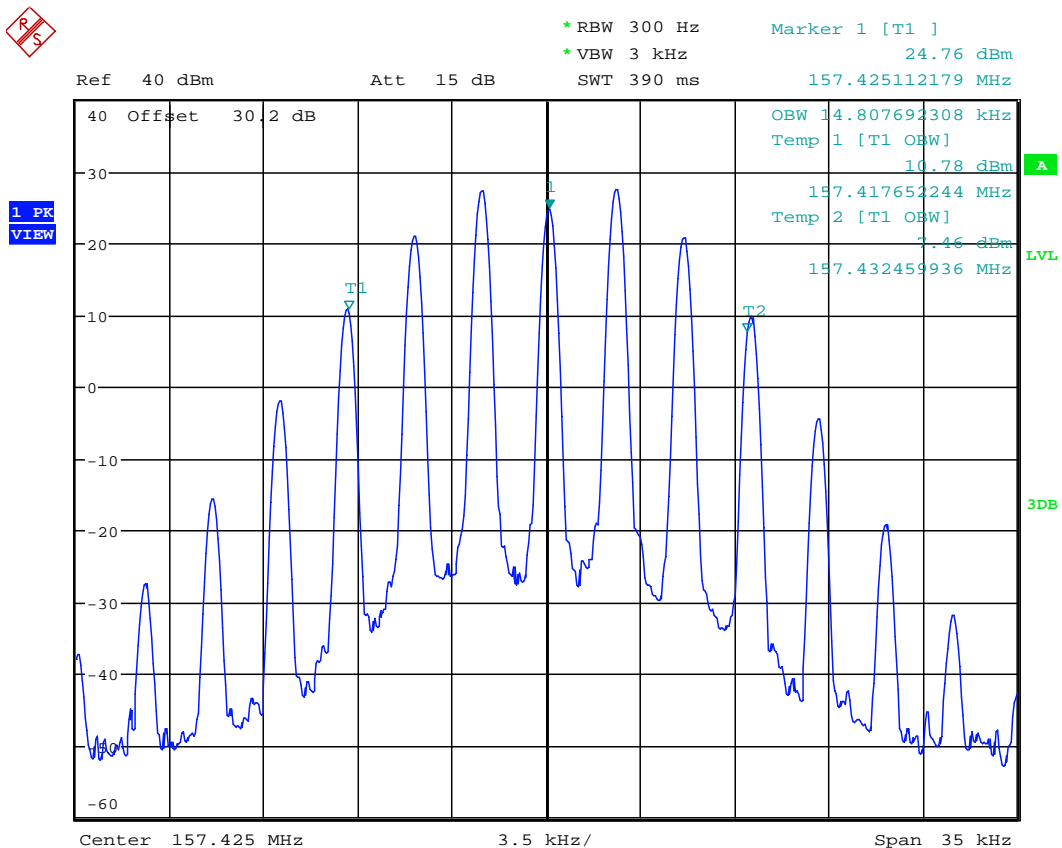

Date: 15.SEP.2022 12:57:56

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.1.6. Configuration: 99% OBW, CH A4 173.3MHz, 25 KHz, Analog, High power


OBW: 14.81 KHz

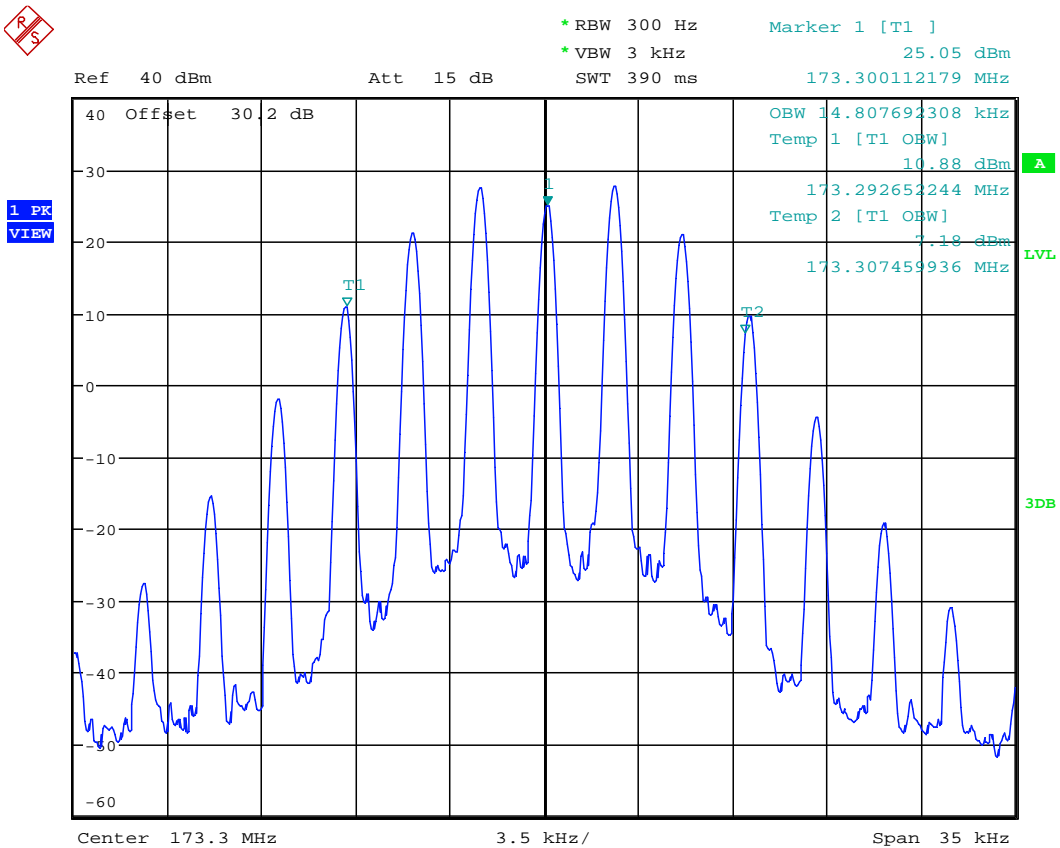

Date: 15.SEP.2022 12:58:57

5.8.3.1.7. Configuration: 99% OBW, CH A5 138.1MHz, 12.5 KHz, Analog, High power


OBW: 5.53 KHz

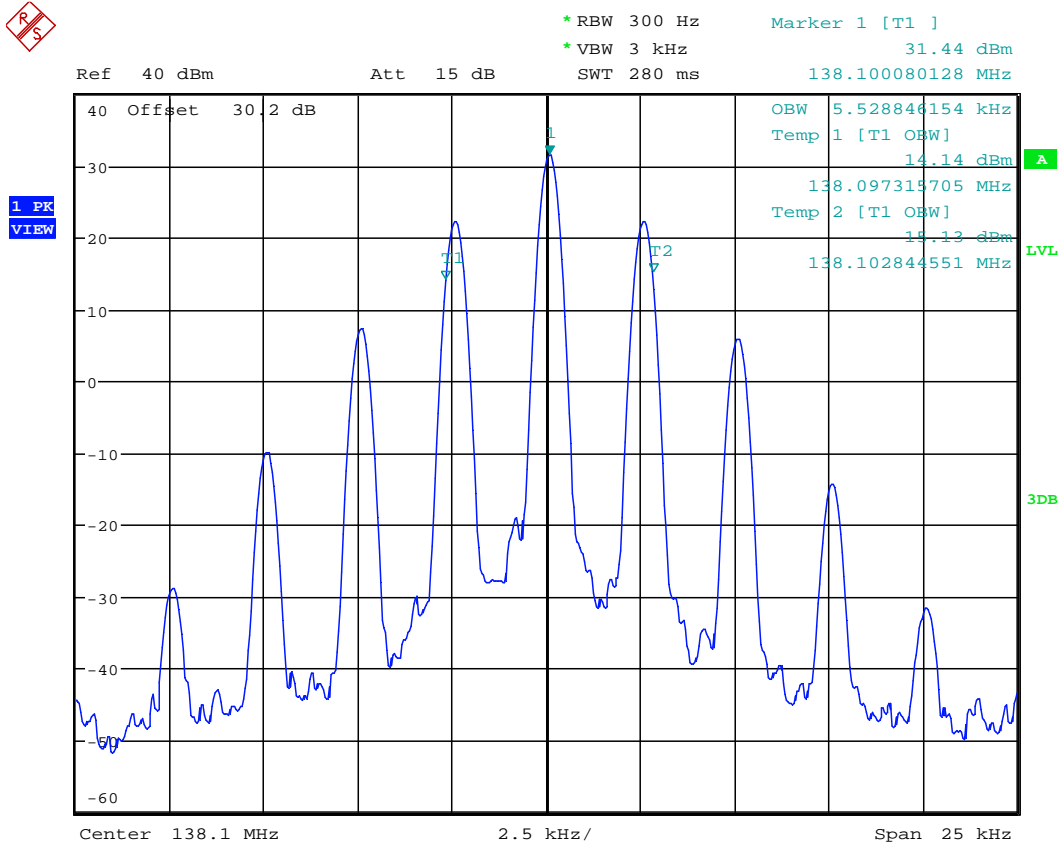

Date: 15.SEP.2022 13:00:01

5.8.3.1.10. Configuration: 99% OBW, CH A8 173.3MHz, 12.5 KHz, Analog, High power


OBW: 5.61 KHz

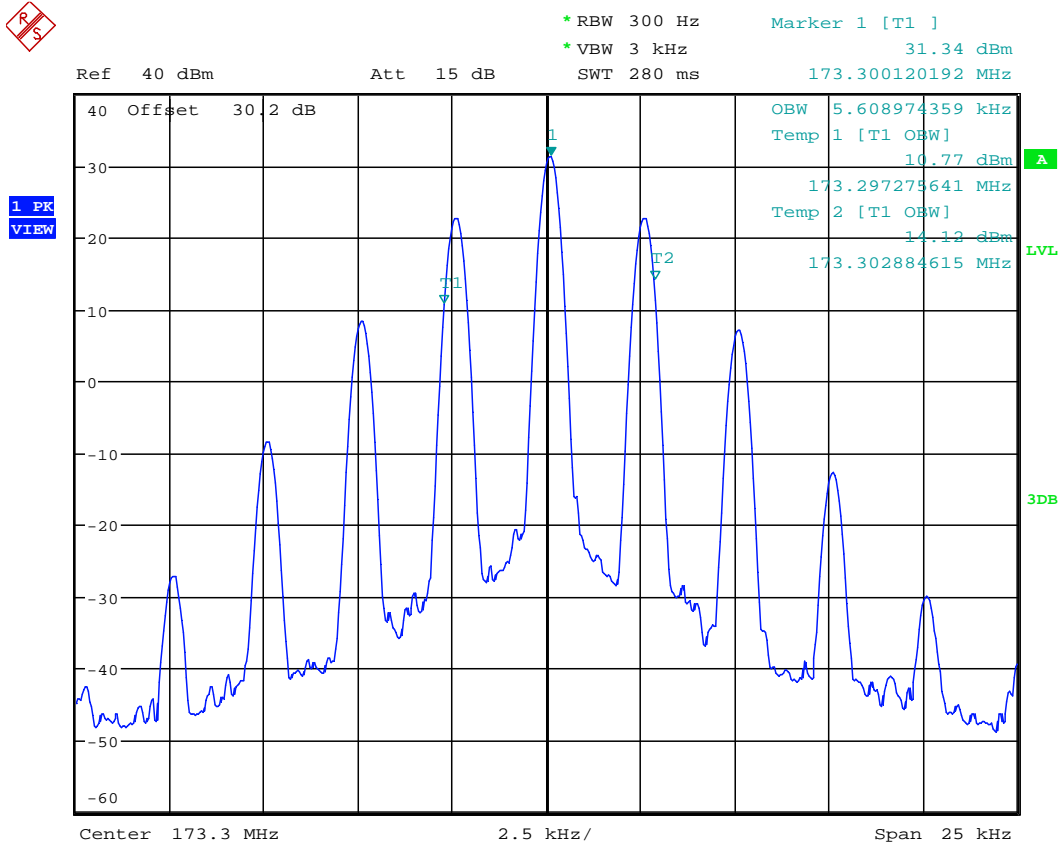

Date: 15.SEP.2022 13:07:50

5.8.3.1.12. Configuration: 99% OBW, CH 88 157.425MHz, 25 KHz, High power

OBW: 14.86 KHz

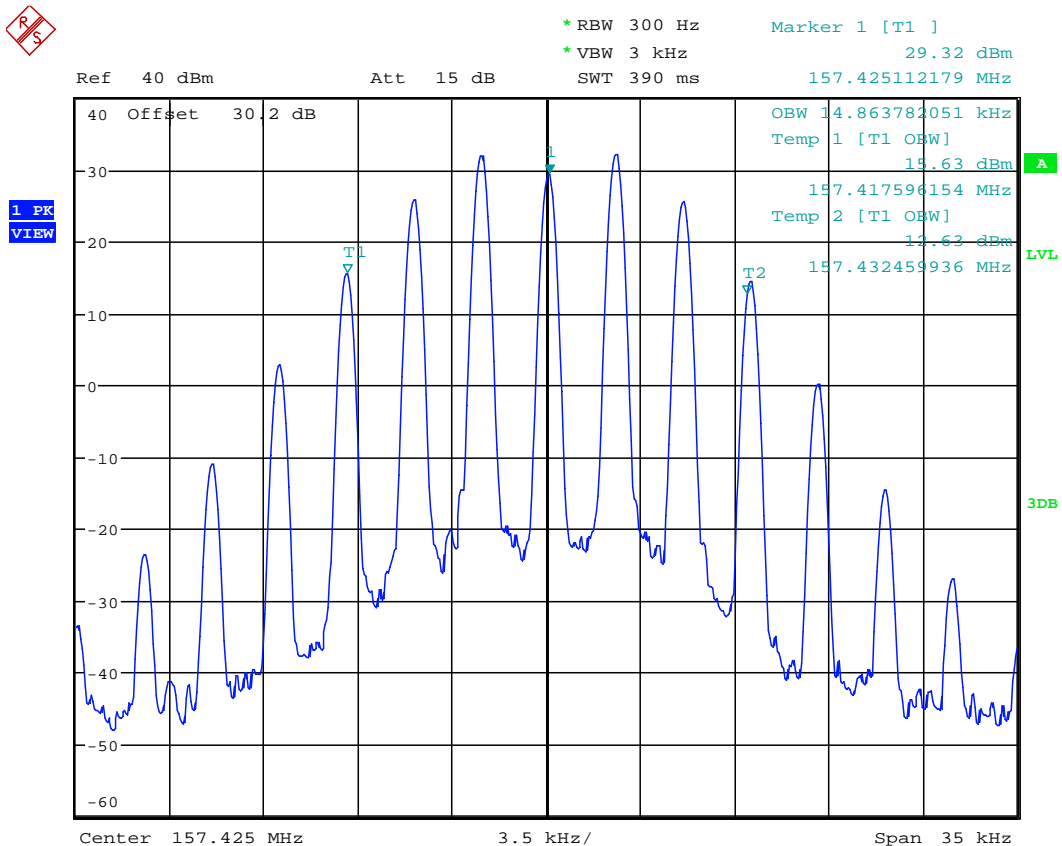


Date: 15.SEP.2022 13:18:21

**MASK LMR
MASK B**

High Power

5.8.3.1.13. Configuration: Mask B, CH A1 138.1MHz, 25 KHz, Analog, High power

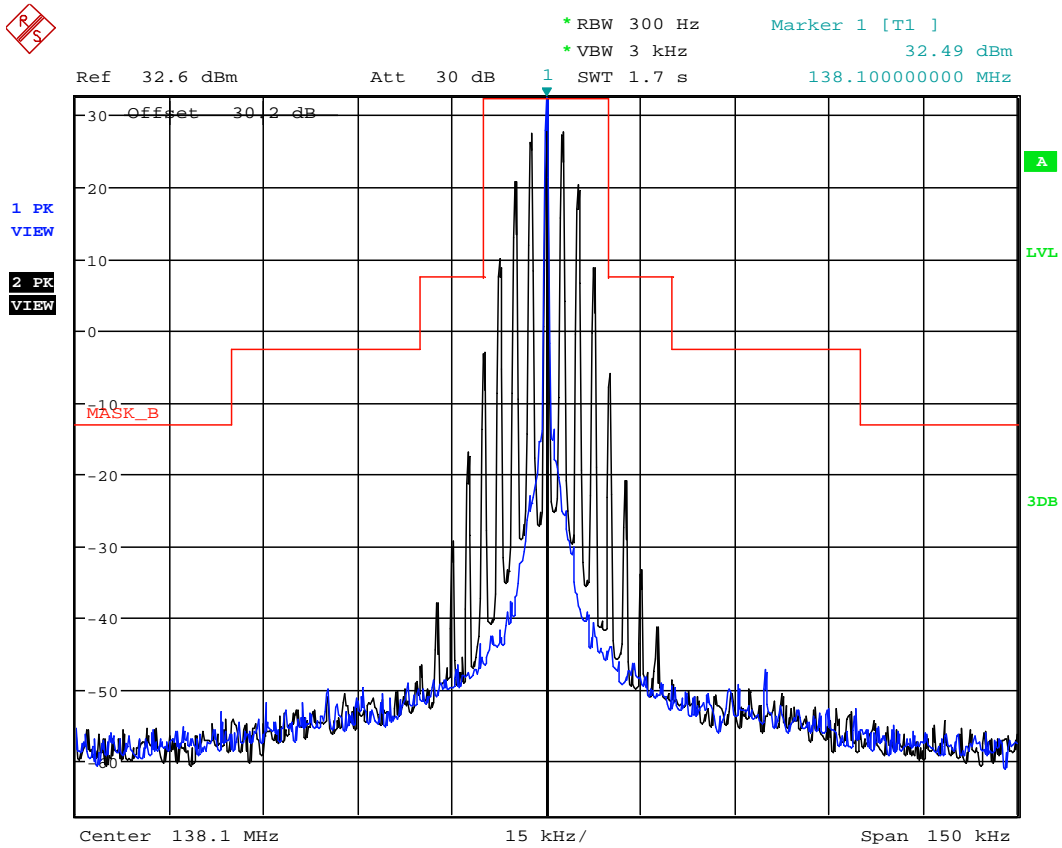

Date: 15.SEP.2022 13:48:56

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.1.14. Configuration: Mask B, CH A2 151.1MHz, 25 KHz, Analog, High power

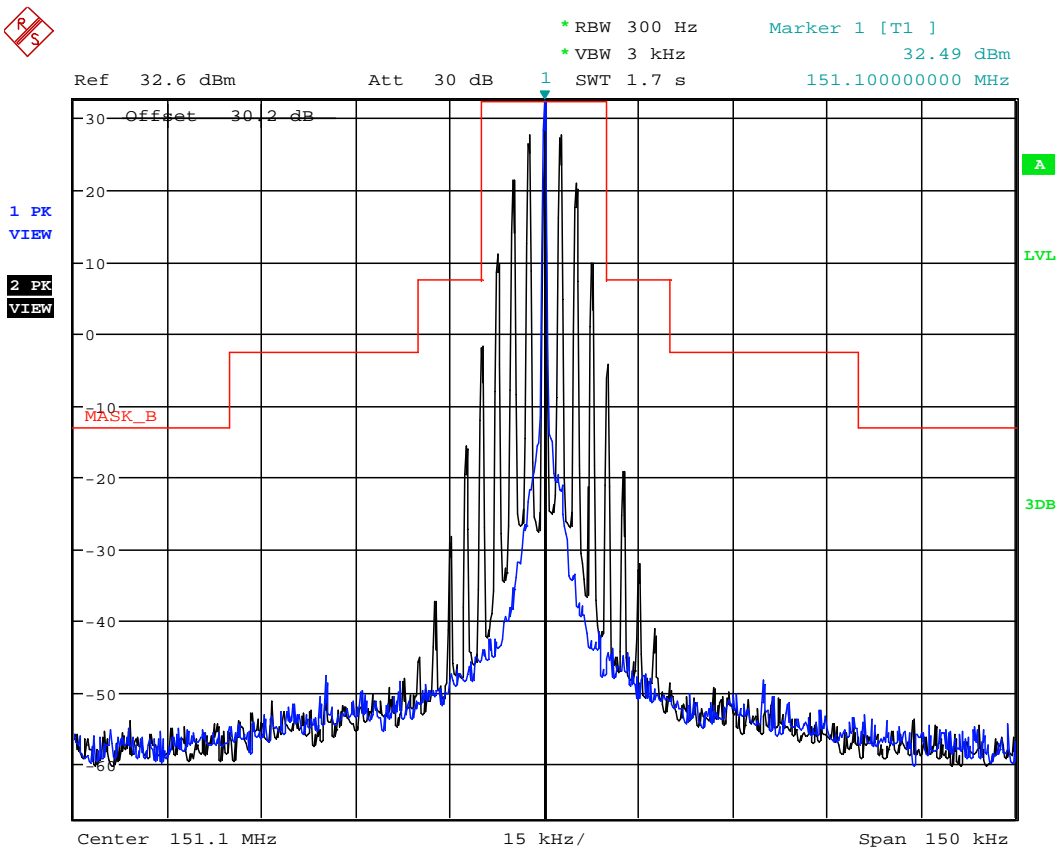


Date: 15.SEP.2022 13:51:01

5.8.3.1.15. Configuration: Mask B, CH A3 157.425MHz, 25 KHz, Analog, High power

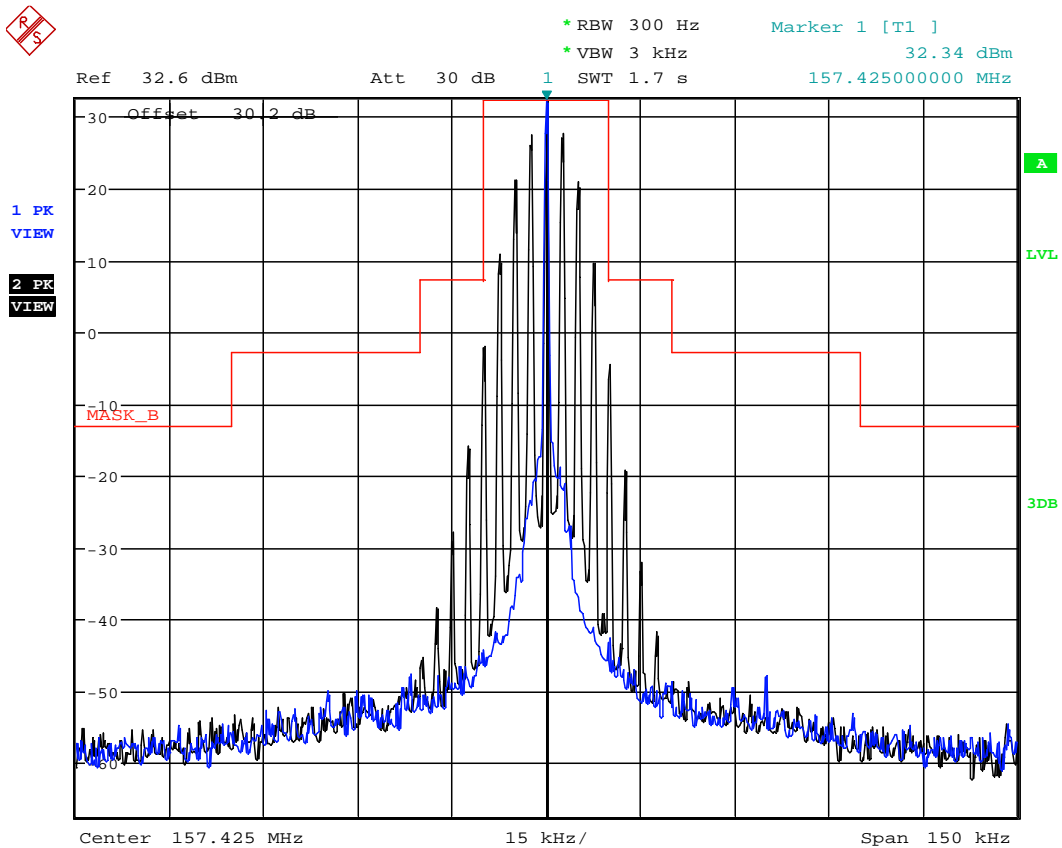

Date: 15.SEP.2022 13:53:19


5.8.3.1.16. Configuration: Mask B, CH A4 173.3MHz, 25 KHz, Analog, High power

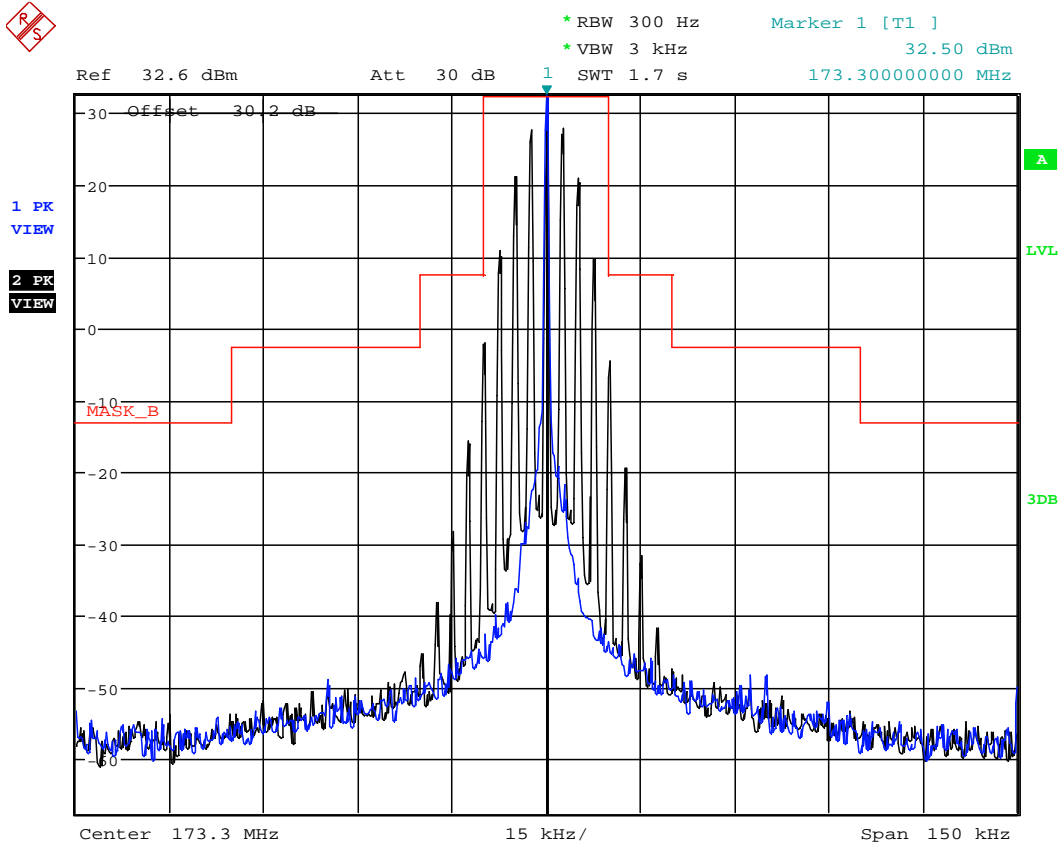

Date: 15.SEP.2022 13:55:41

Low Power

5.8.3.1.17. Configuration: Mask B, CH A1 138.1MHz, 25 KHz, Analog, Low power

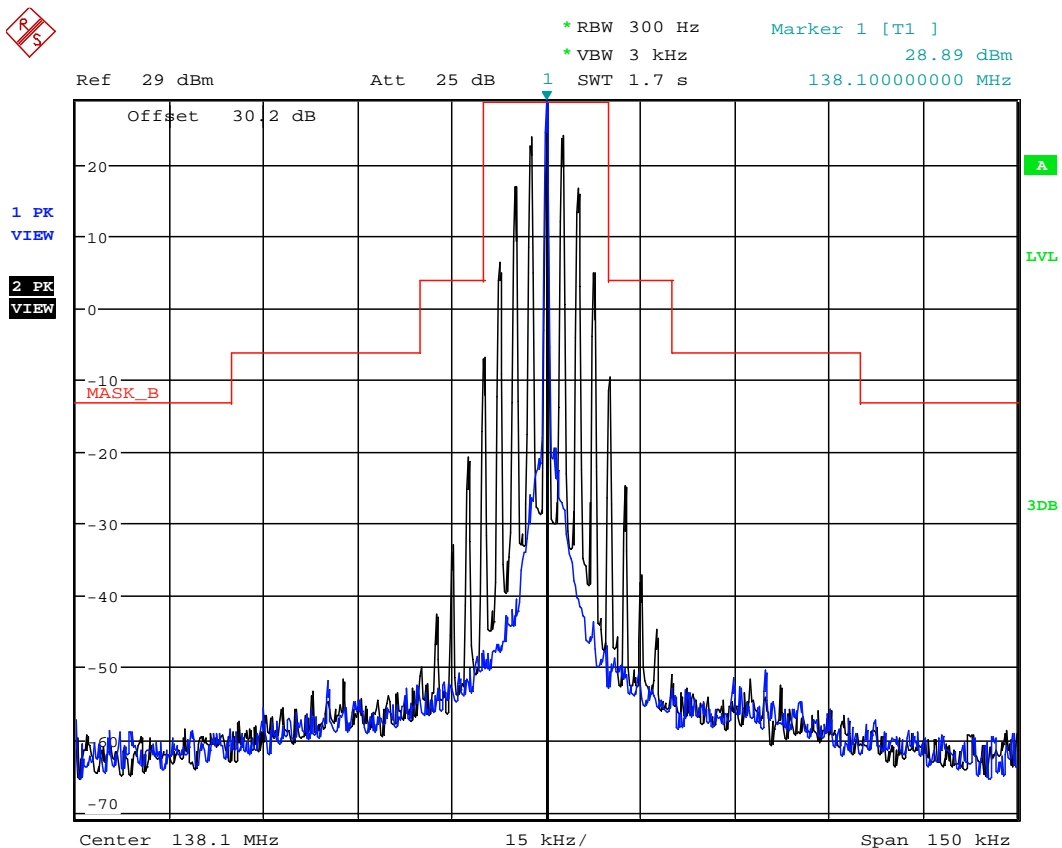

Date: 15.SEP.2022 13:57:59

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.1.18. Configuration: Mask B, CH A2 151.1MHz, 25 KHz, Analog, Low power

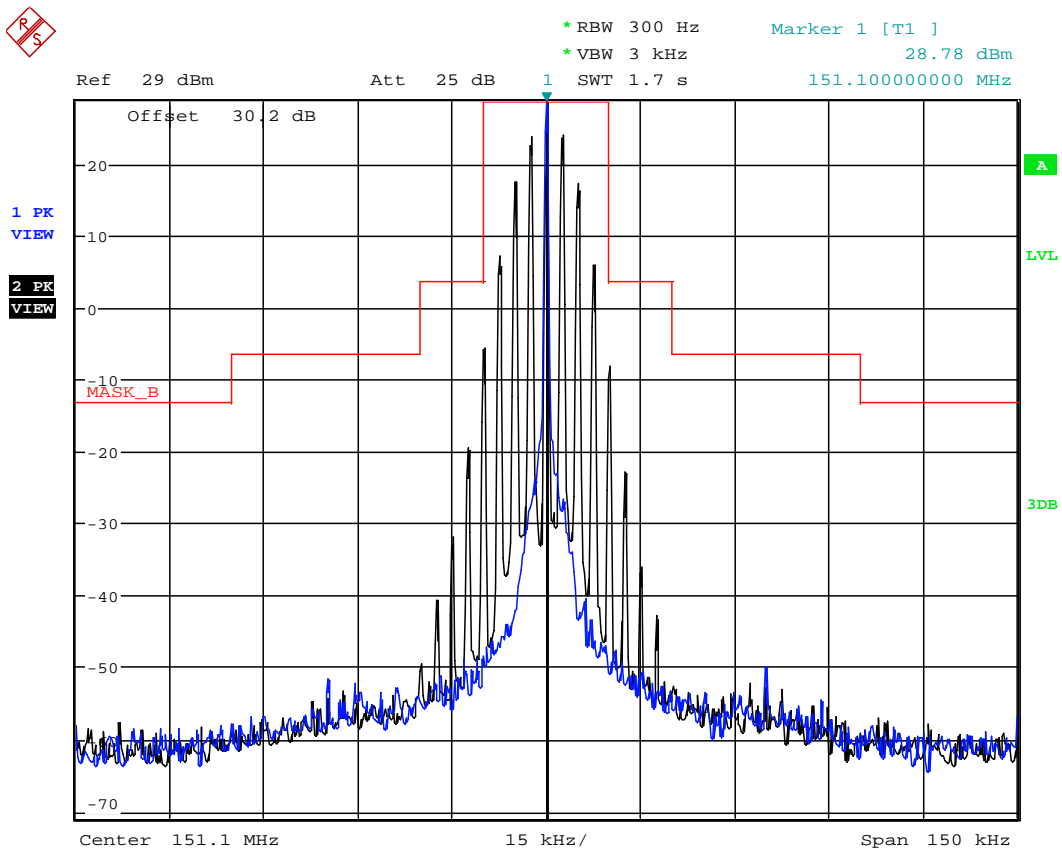


Date: 15.SEP.2022 14:00:02

5.8.3.1.19. Configuration: Mask B, CH A3 157.425MHz, 25 KHz, Analog, Low power

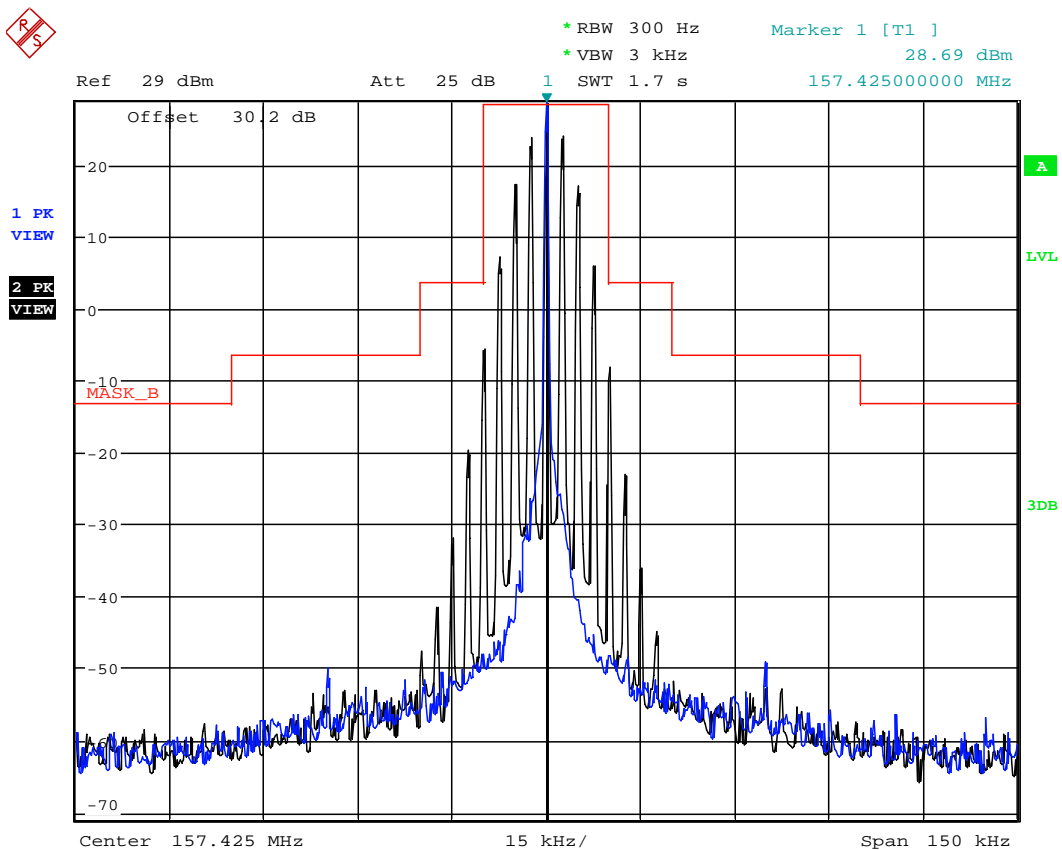

Date: 15.SEP.2022 14:01:58

5.8.3.1.20. Configuration: Mask B, CH A4 173.3MHz, 25 KHz, Analog, Low power

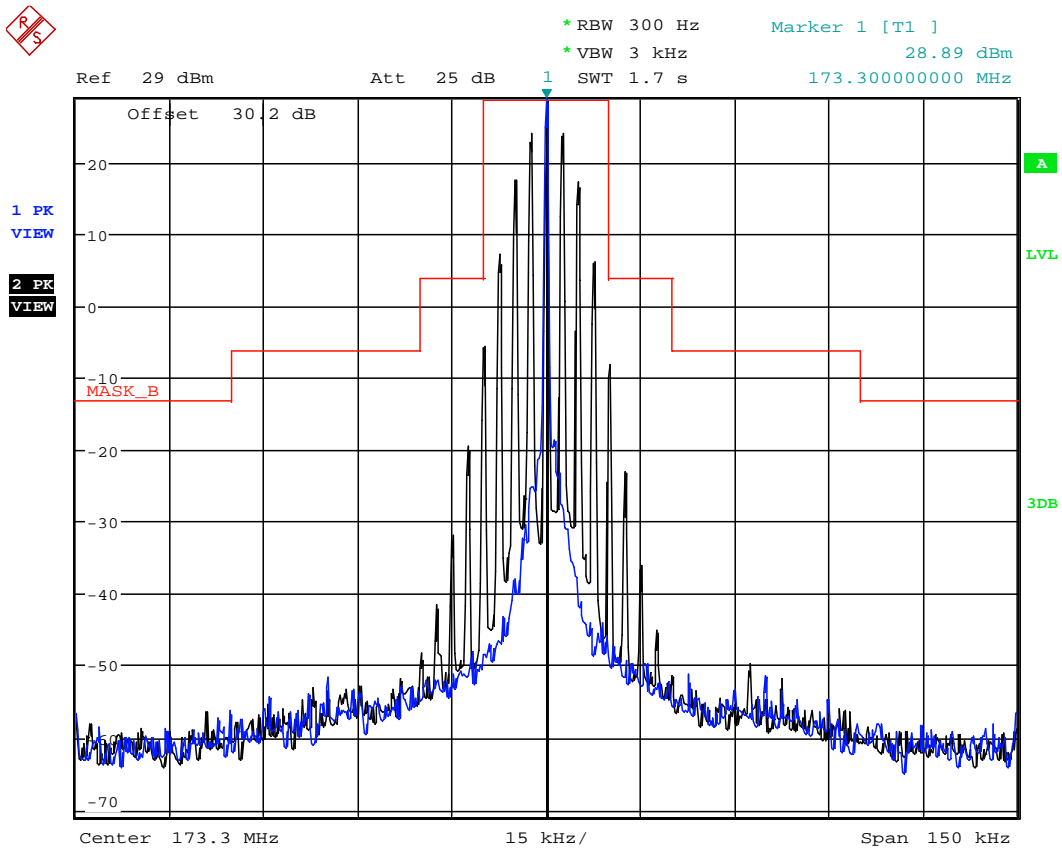


Date: 15.SEP.2022 14:03:56

MASK D


High Power

5.8.3.1.21. Configuration: Mask D, CH A5 138.1MHz, 12.5 KHz, Analog, High power

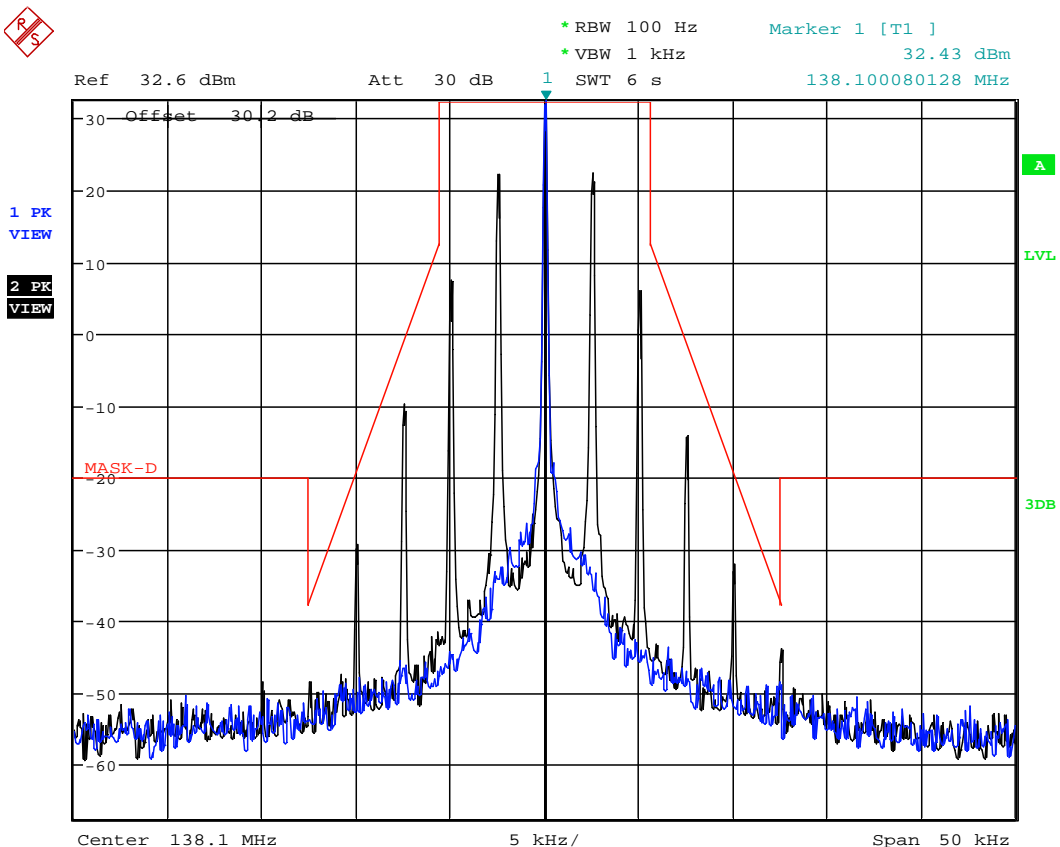


Date: 15.SEP.2022 14:10:10

5.8.3.1.22. Configuration: Mask D, CH A6 151.1MHz, 12.5 KHz, Analog, High power

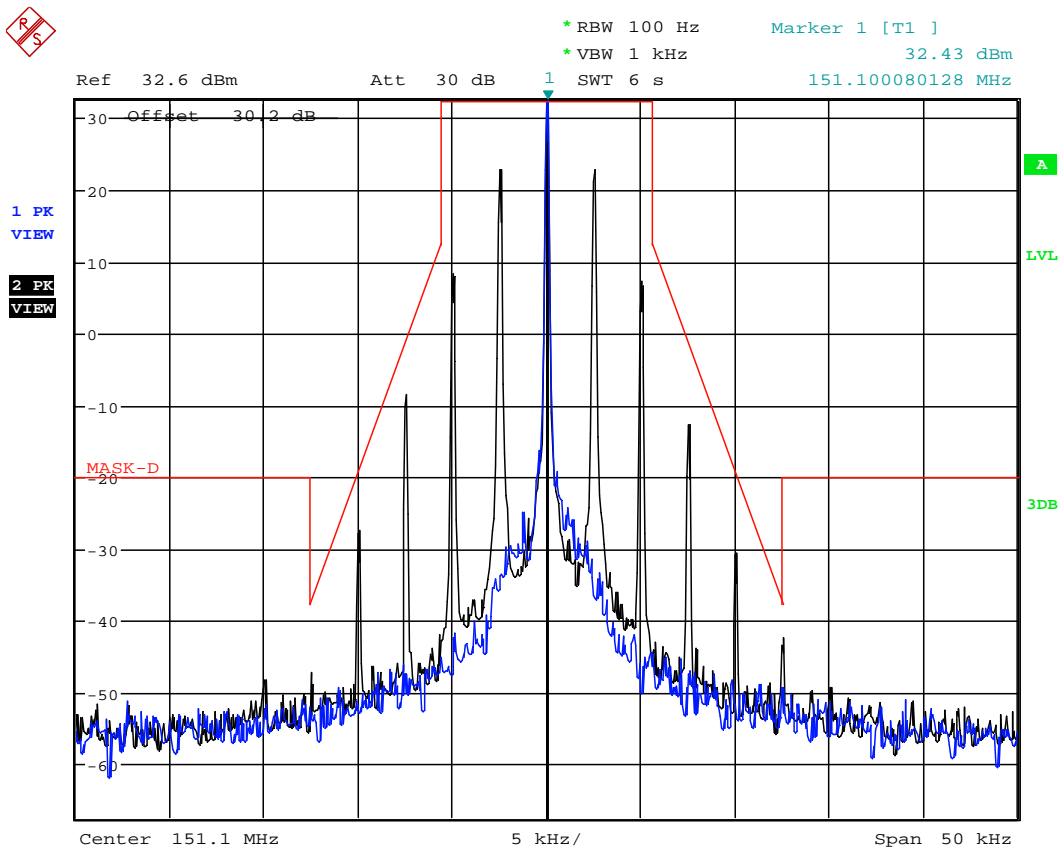

Date: 15.SEP.2022 14:12:13

5.8.3.1.23. Configuration: Mask D, CH A7 157.425MHz, 12.5 KHz, Analog, High power

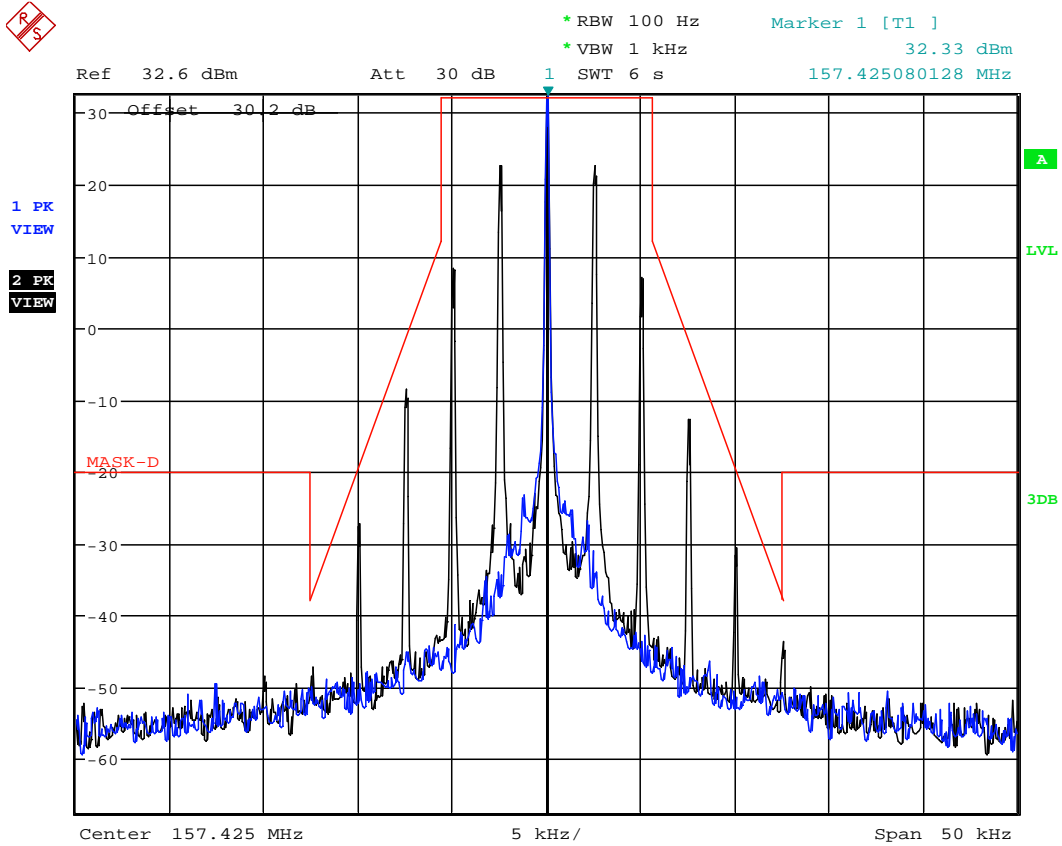

Date: 15.SEP.2022 14:14:59

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.1.24. Configuration: Mask D, CH A8 173.3MHz, 12.5 KHz, Analog, High power

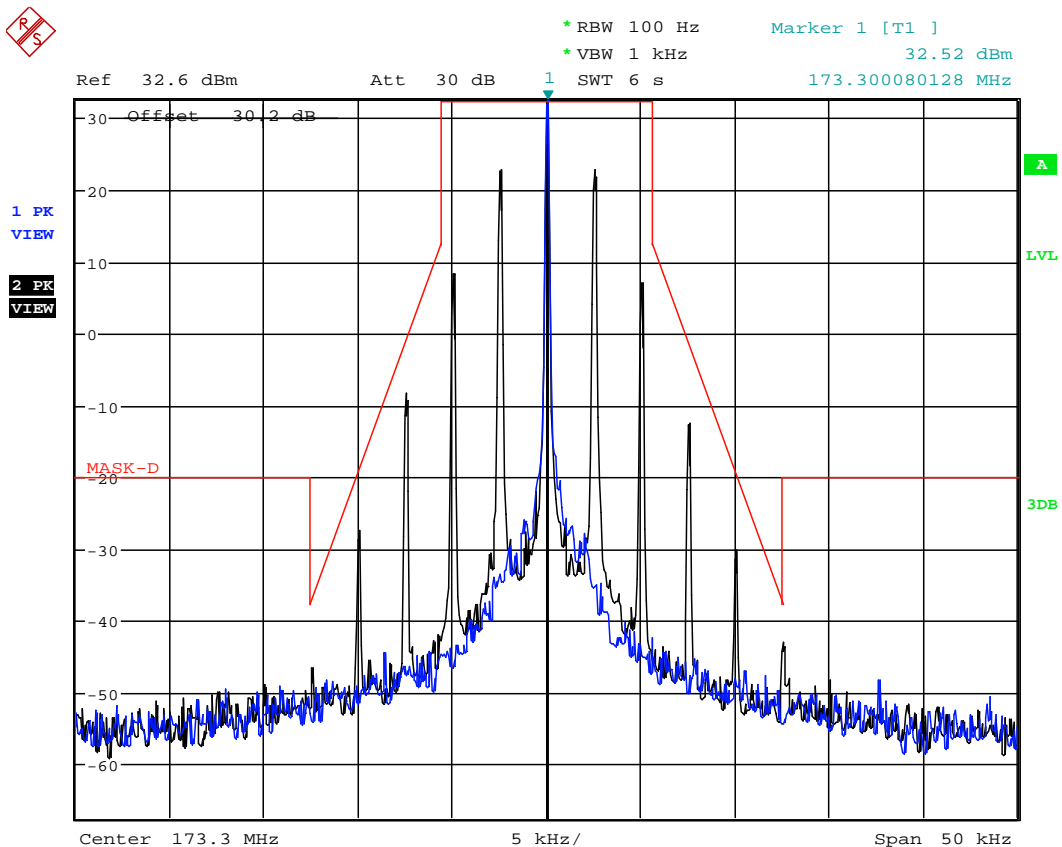


Date: 15.SEP.2022 14:18:34

5.8.3.1.26. Configuration: Mask D, CH A6 151.1MHz, 12.5 KHz, Analog, Low power

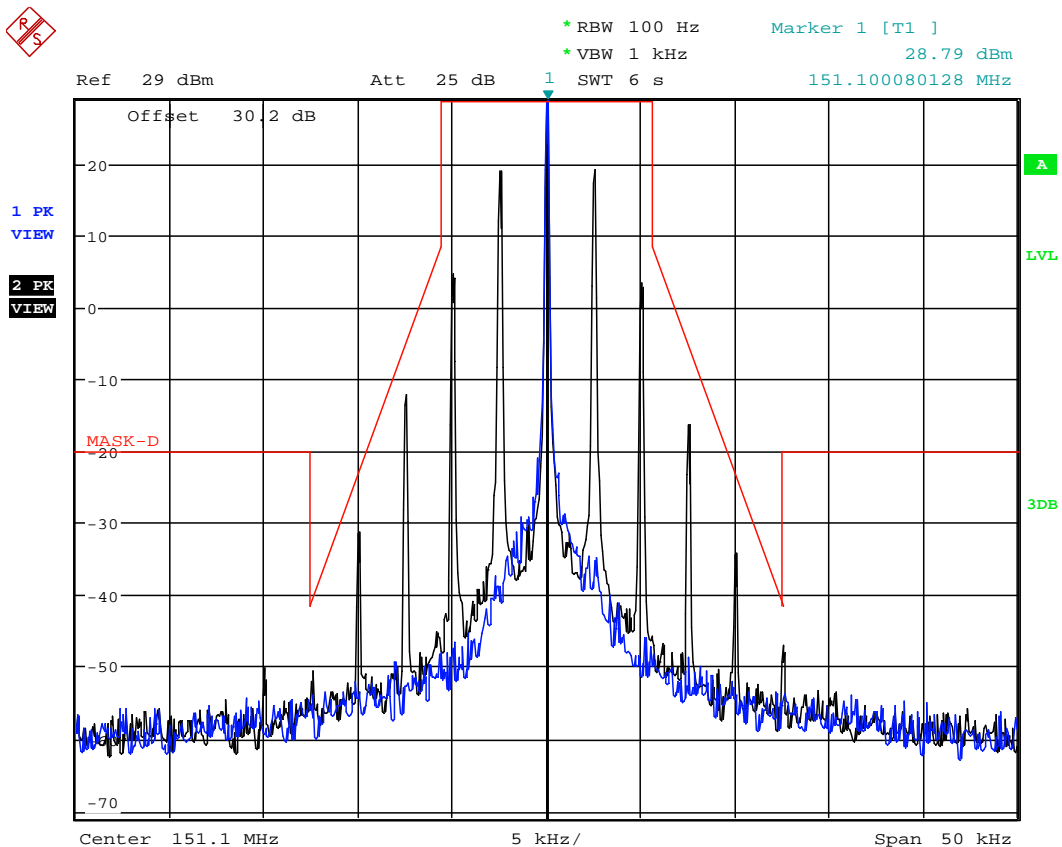


Date: 15.SEP.2022 14:23:14

5.8.3.1.27. Configuration: Mask D, CH A7 157.425MHz, 12.5 KHz, Analog, Low power

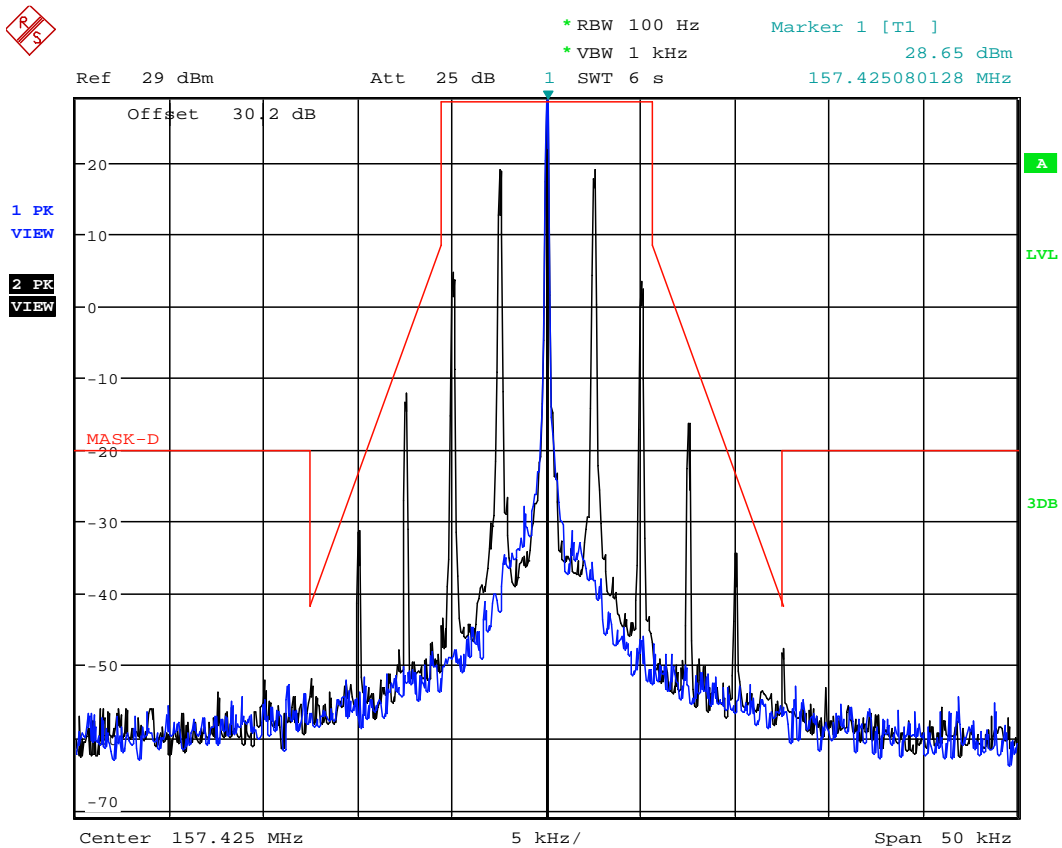

Date: 15.SEP.2022 14:25:30

5.8.3.1.28. Configuration: Mask D, CH A8 173.3MHz, 12.5 KHz, Analog, Low power

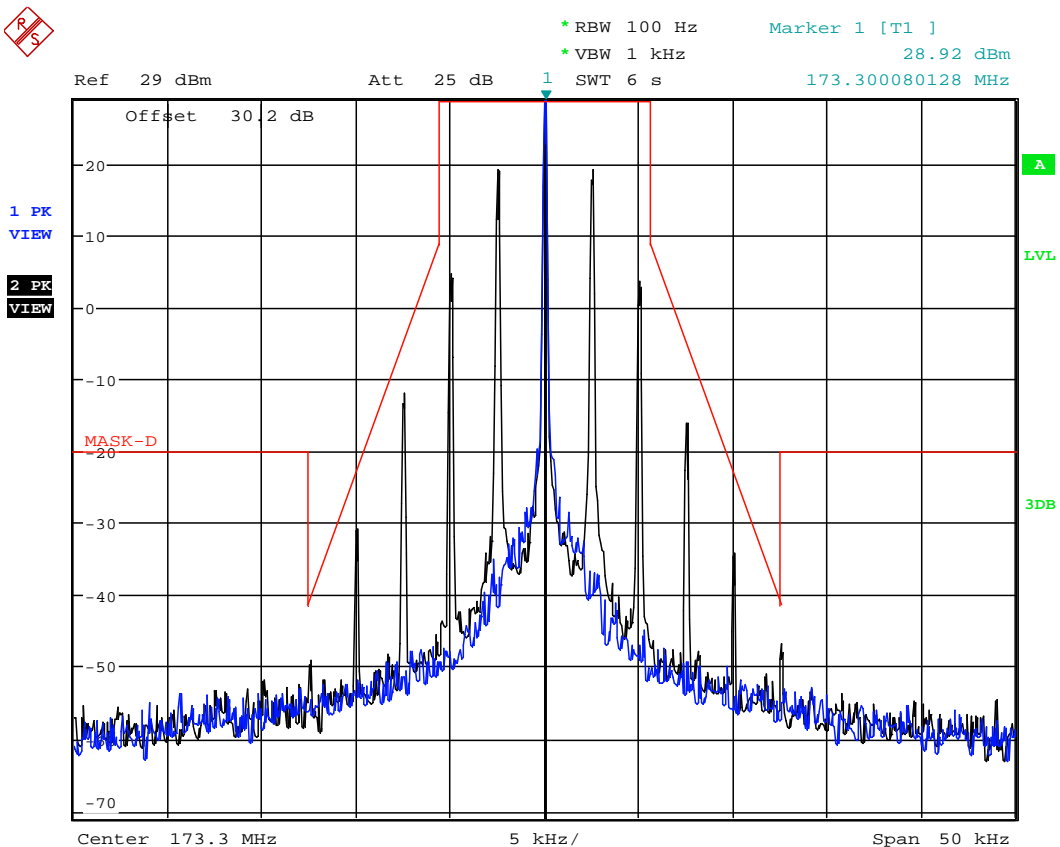

Date: 15.SEP.2022 14:27:59

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


MASK MARINE

High Power

5.8.3.1.29. Configuration: Mask B, CH 01A 156.050MHz, 25 KHz, High power

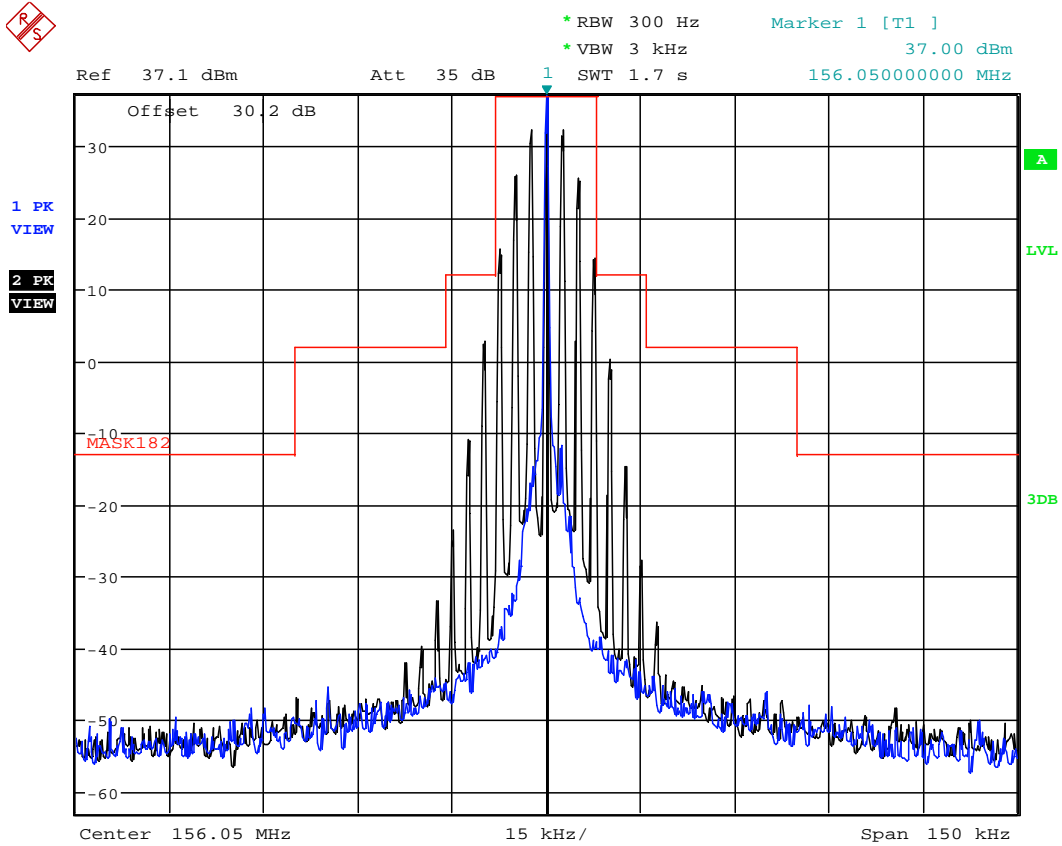

Date: 15.SEP.2022 13:29:15

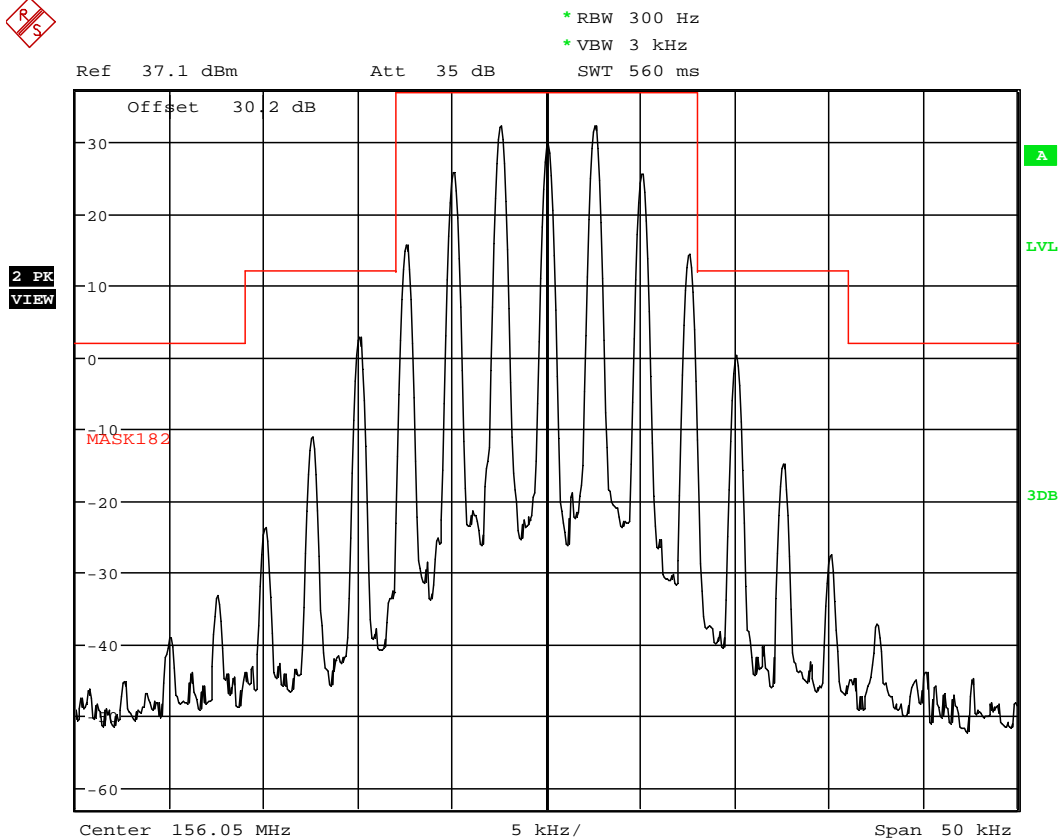

Date: 15.SEP.2022 13:30:02

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.1.30. Configuration: Mask B, CH 88 157.425MHz, 25 KHz, High power

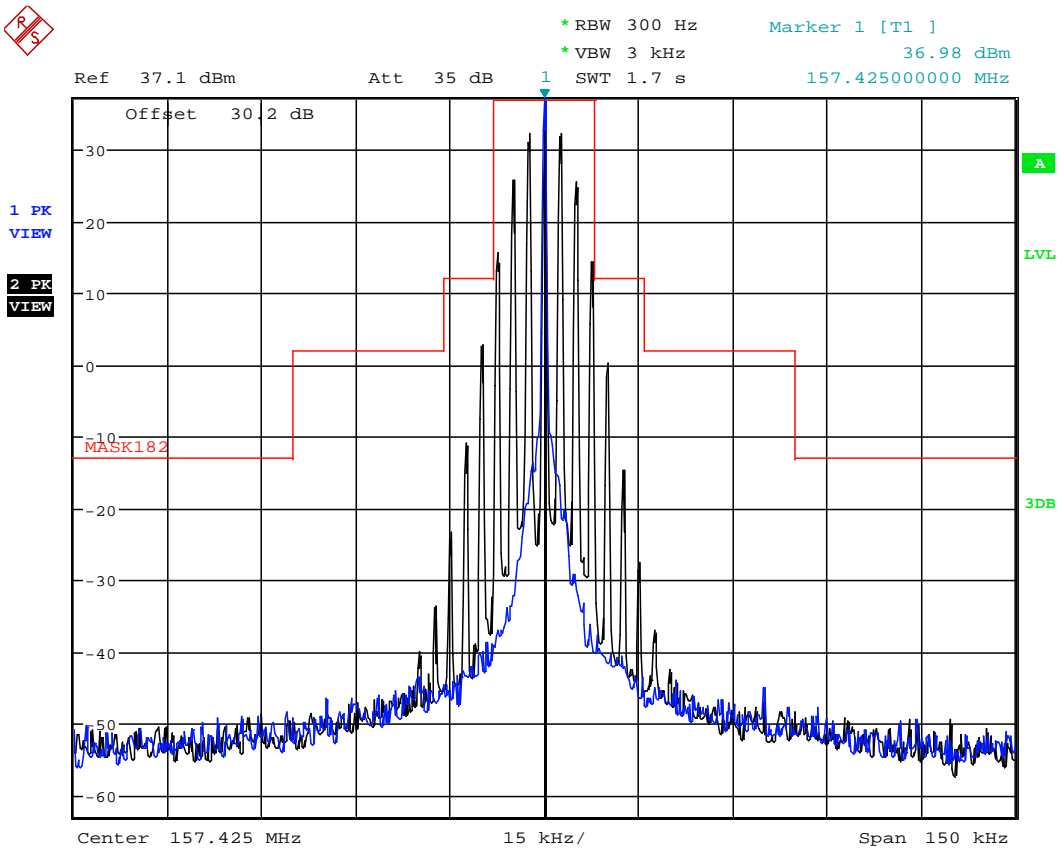

Date: 15.SEP.2022 13:32:27

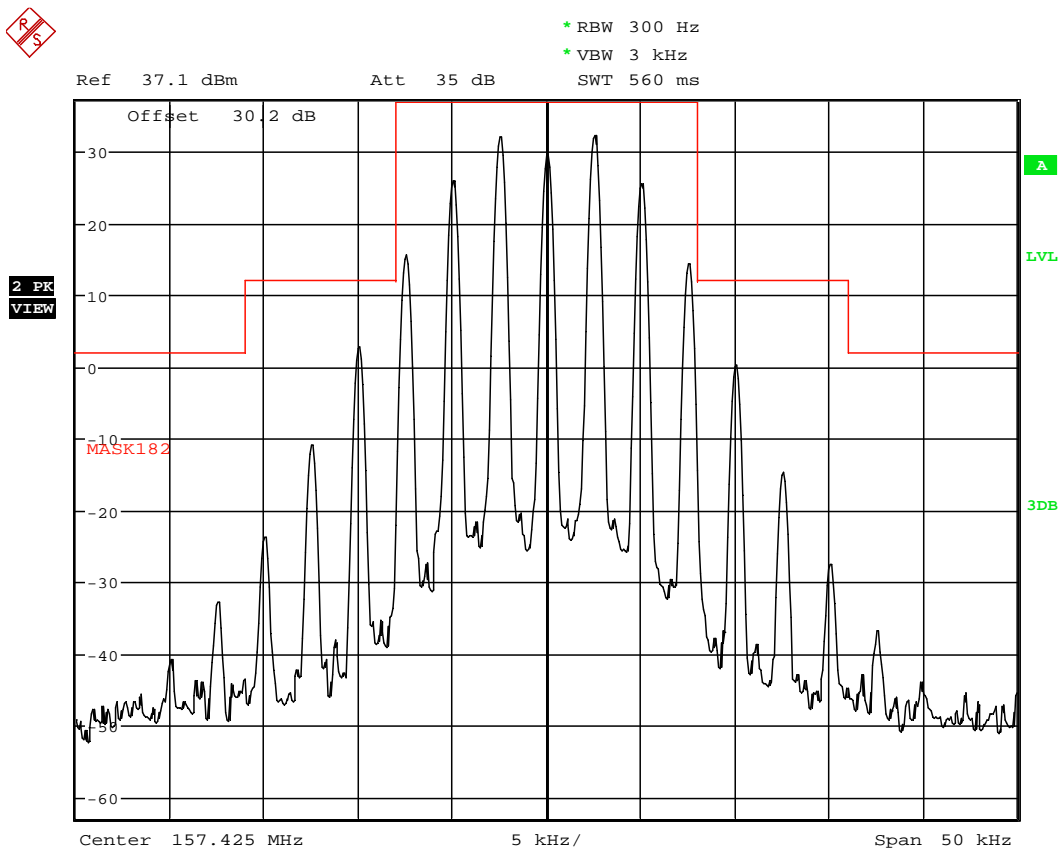

Date: 15.SEP.2022 13:33:05

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Low Power

5.8.3.1.31. Configuration: Mask B, CH 01A 156.050MHz, 25 KHz, Low power

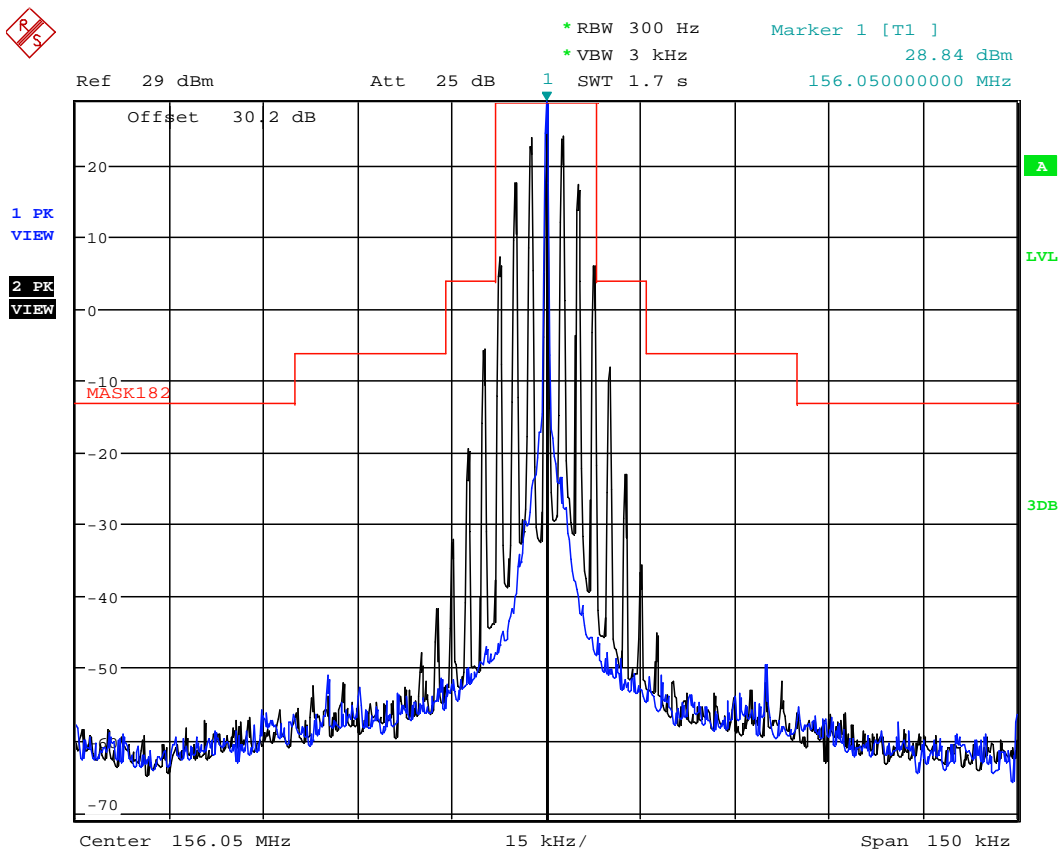

Date: 15.SEP.2022 13:36:03

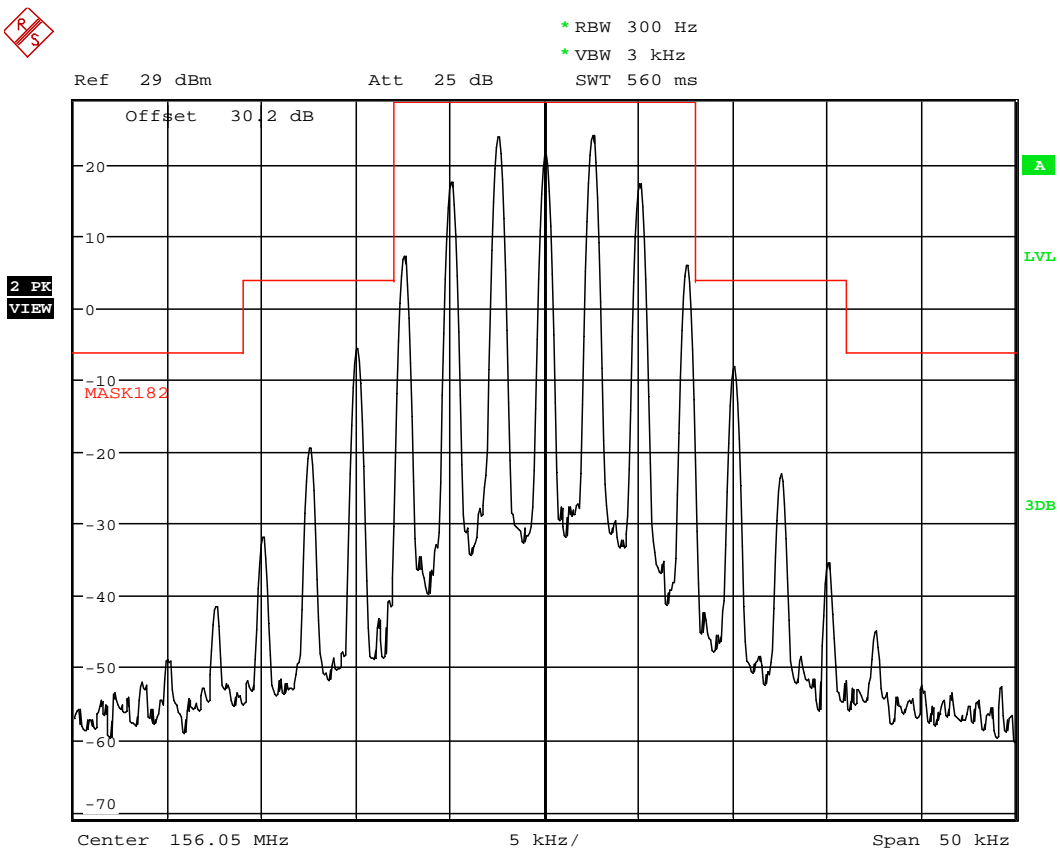

Date: 15.SEP.2022 13:36:49

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.8.3.1.32. Configuration: Mask B, CH 88 157.425MHz, 25 KHz, Low power

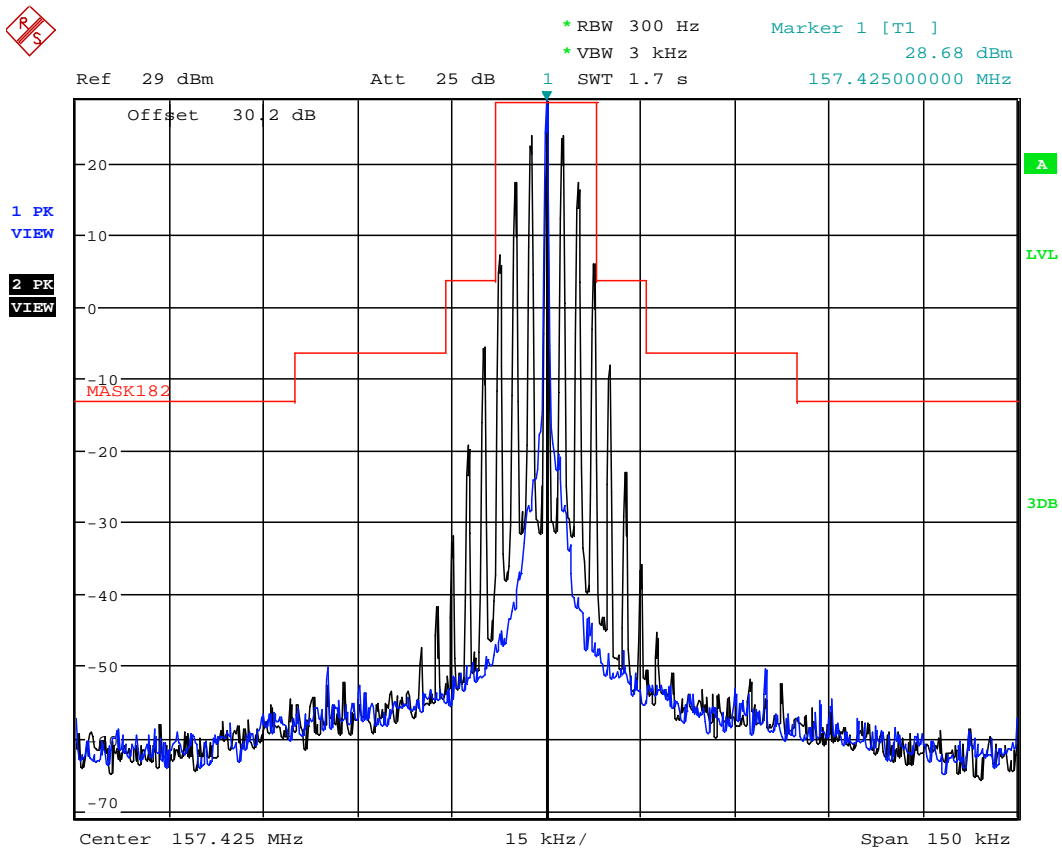

Date: 15.SEP.2022 13:39:17

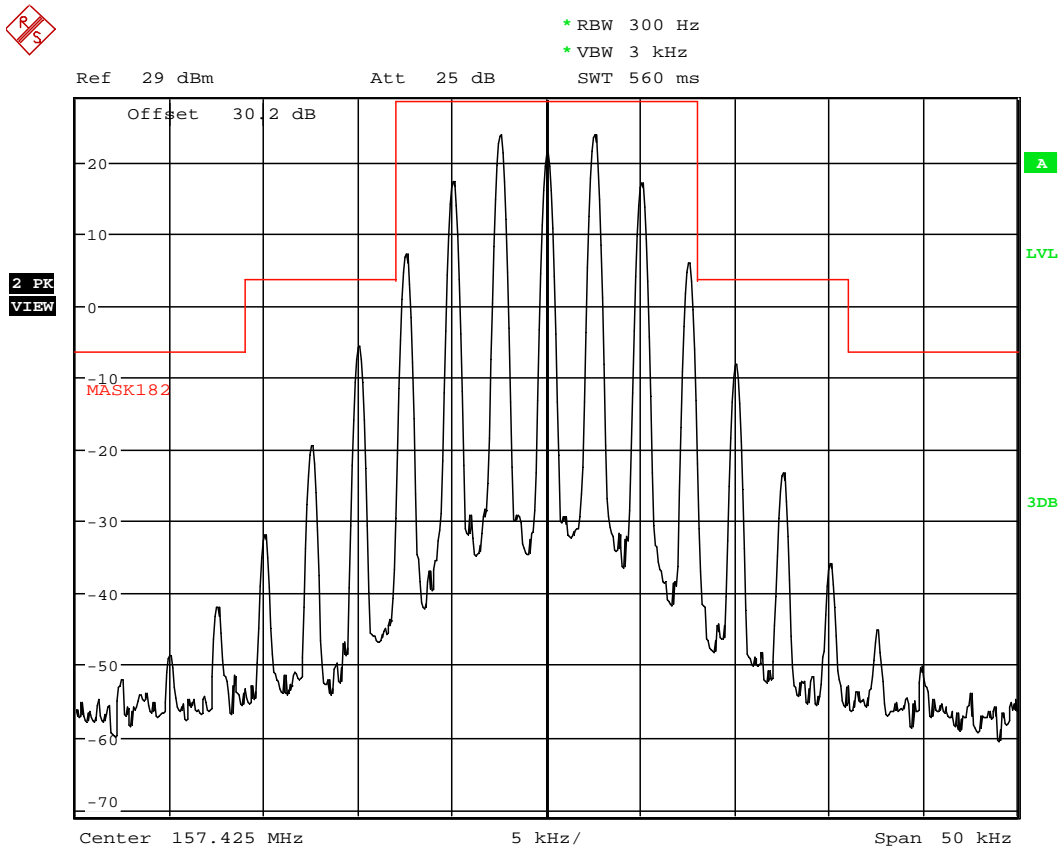

Date: 15.SEP.2022 13:40:01

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9. TRANSMITTER ANTENNA POWER SPURIOUS/HARMONIC CONDUCTED EMISSIONS [§ 2.1051, 2.1057, 22.359, 80.211(f)(3) & 90.210]

5.9.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:


FCC Rules	Attenuation Limit (dBc)
§ 22.359	At least $43 + 10 \log (P)$ dB.
§ 80.211(f)(3),	At least $43 + 10 \log_{10}$ (mean power in watts) dB
§ 90.210(b)	At least $43 + 10 \log (P)$ dB
§ 90.210(d)	At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

5.9.2. Method of Measurements


Refer to Section 8.5 of this report for measurement details

5.9.3. Test Data

Note: There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and modulation types. Therefore, the RF spurious/harmonic emissions in this section would be performed for 12.5 KHz channel spacing for LMR at 2 W and for 25kHz for Part 80 frequencies of 156.050 MHz and 157.425 MHz at 5 W.

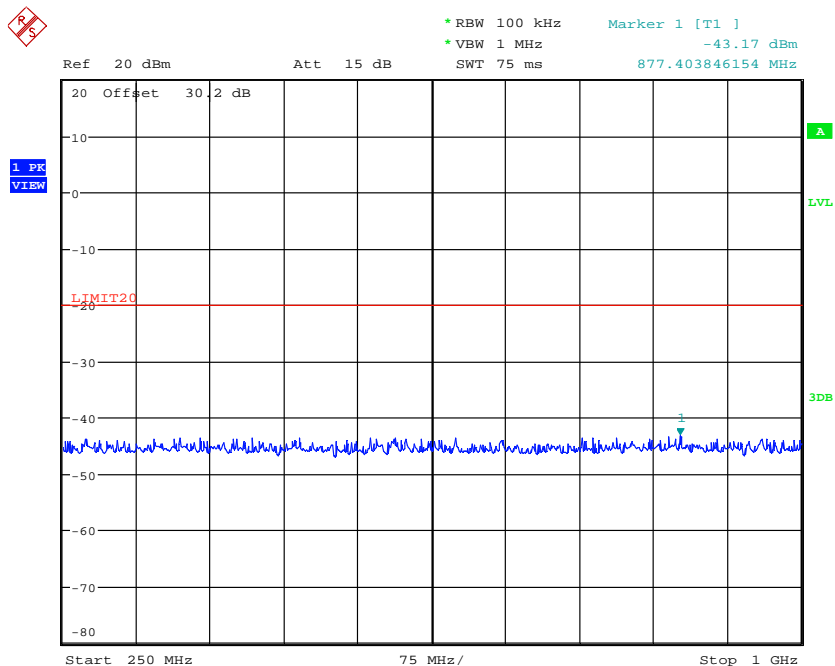

Date: 15.SEP.2022 14:56:54

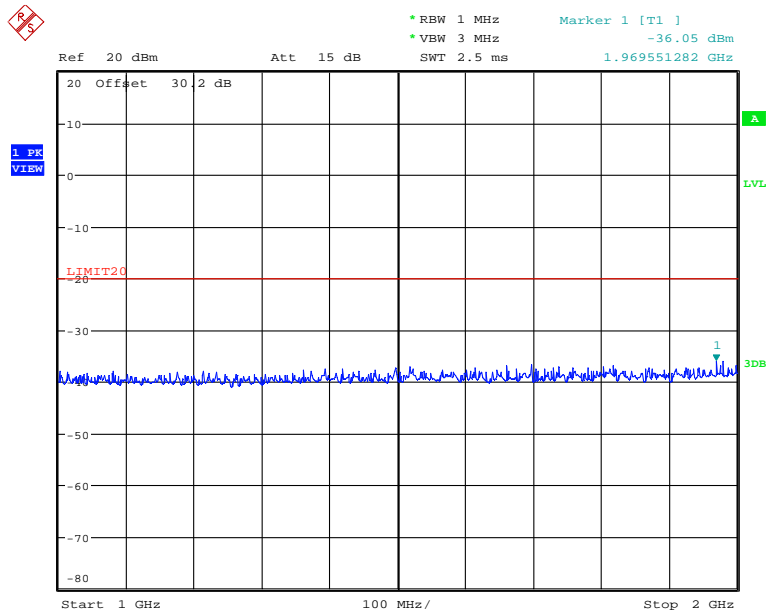

Date: 15.SEP.2022 15:03:15

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.2. Configuration: Tx Conducted, CH A6 151.1MHz, 12.5 KHz, Analog, High power

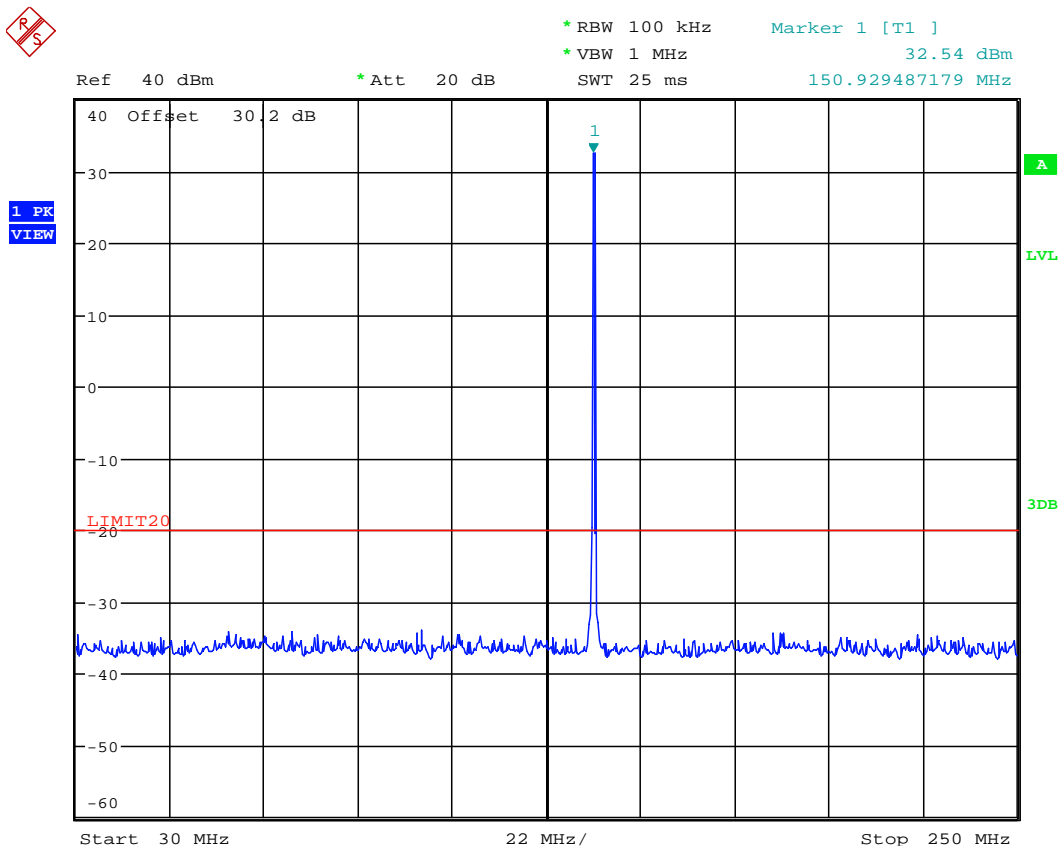

Date: 15.SEP.2022 14:49:27

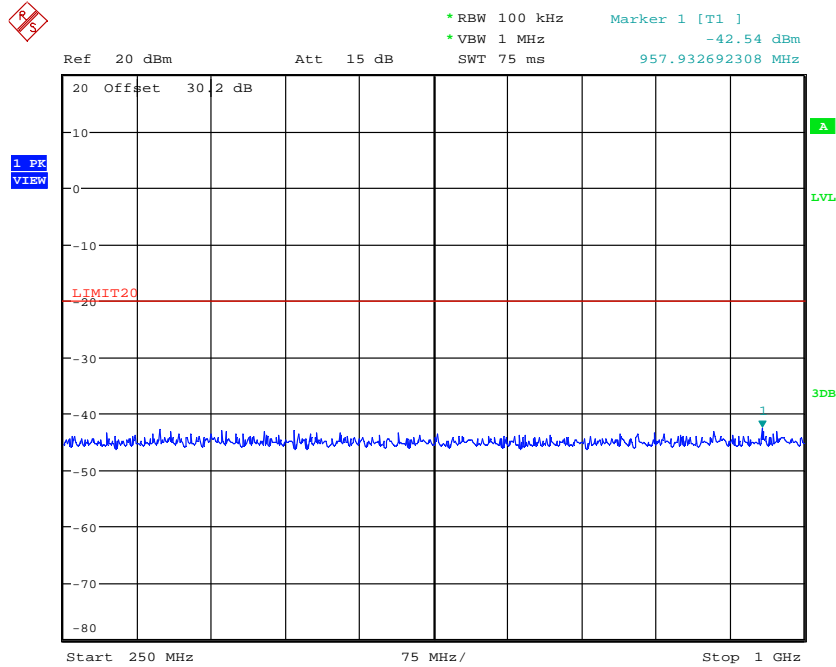

Date: 15.SEP.2022 14:58:05

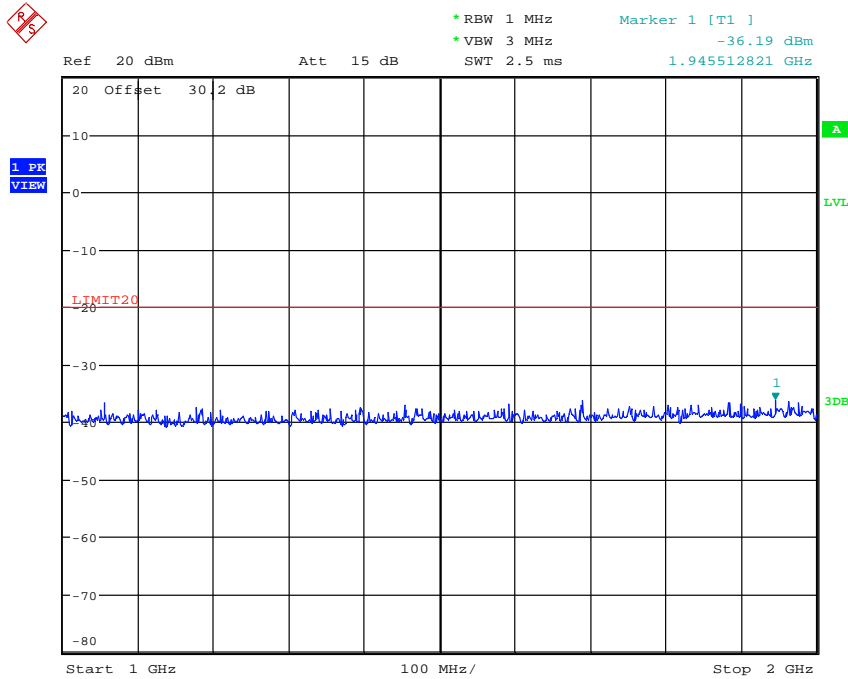

Date: 15.SEP.2022 15:04:04

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.9.3.3. Configuration: Tx Conducted, CH A7 157.425MHz, 12.5 KHz, Analog, High power

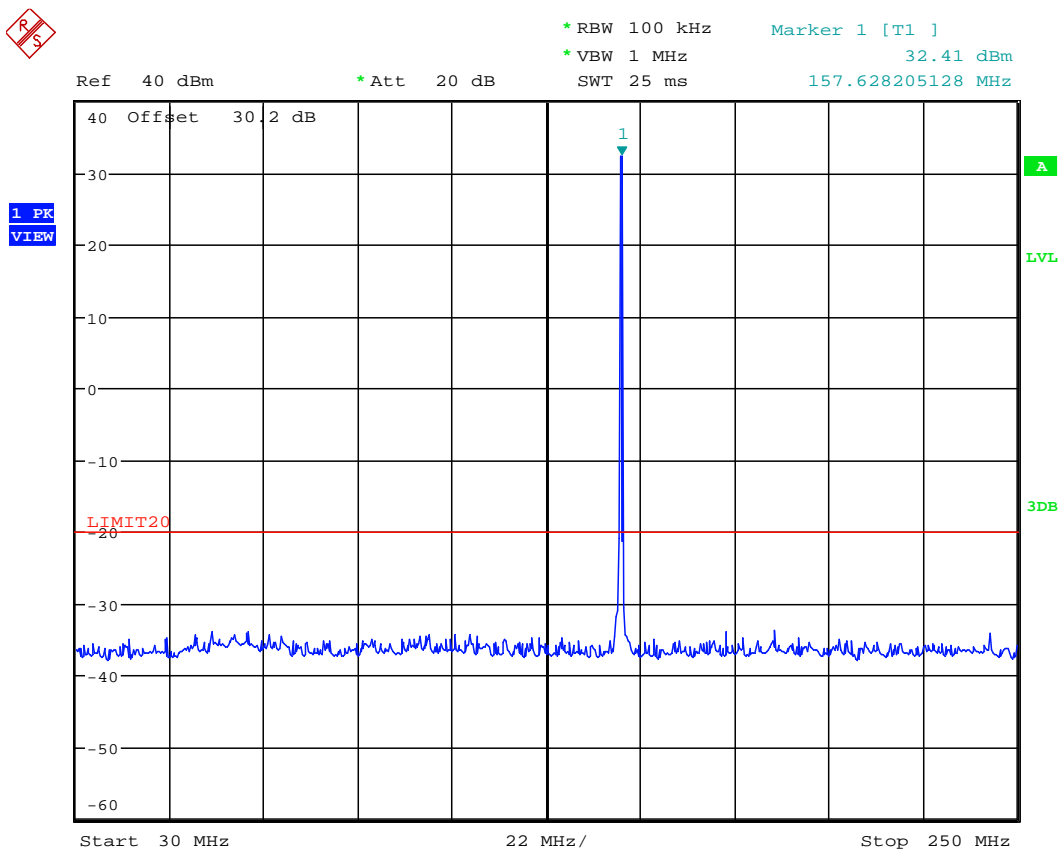

Date: 15.SEP.2022 14:50:23


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

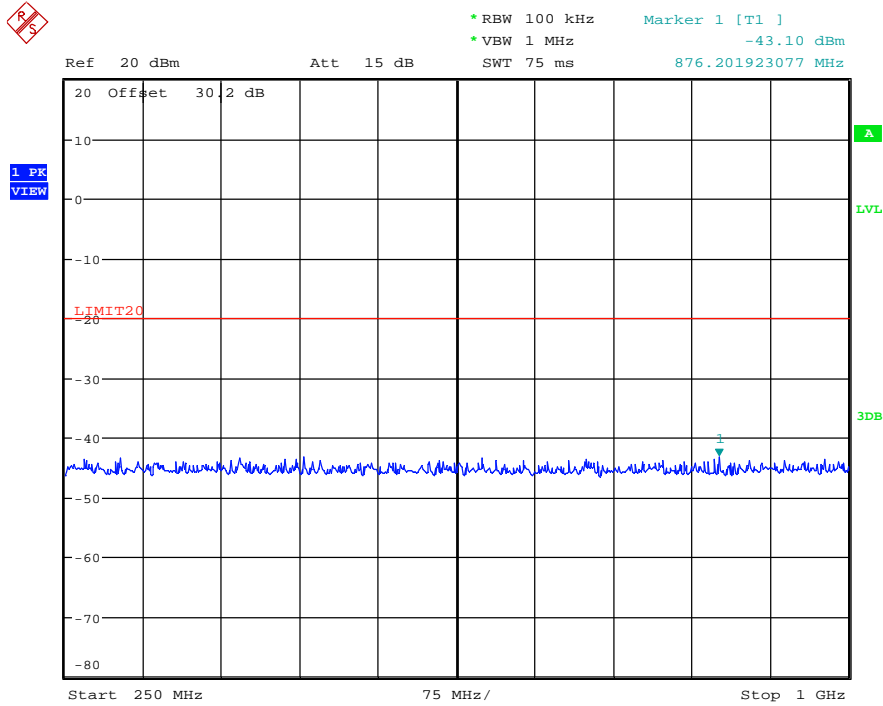

Date: 15.SEP.2022 14:58:42

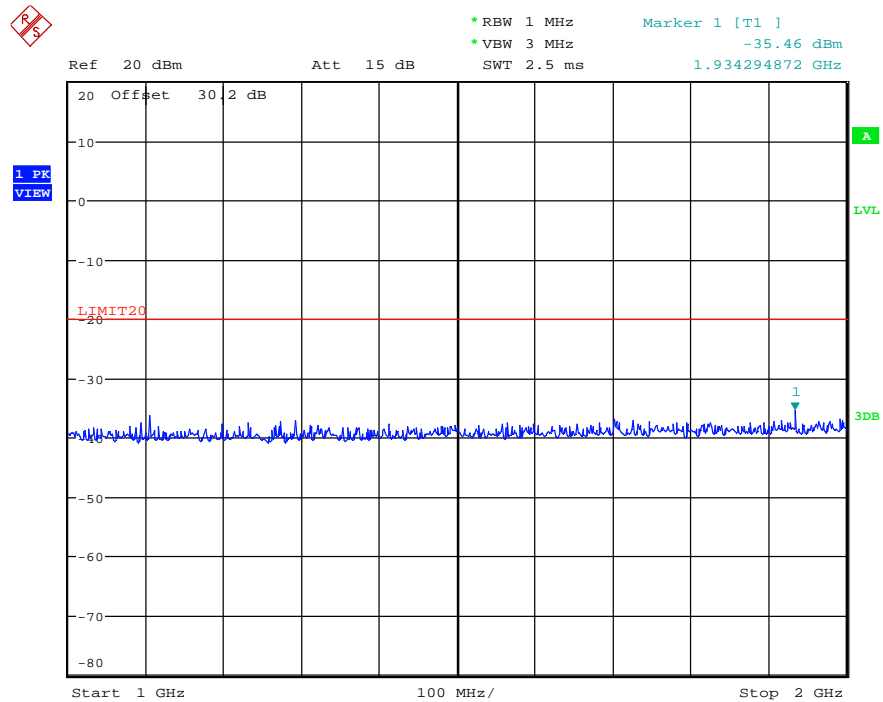

Date: 15.SEP.2022 15:04:50

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.4. Configuration: Tx Conducted, CH A8 173.3MHz, 12.5 KHz, Analog, High power

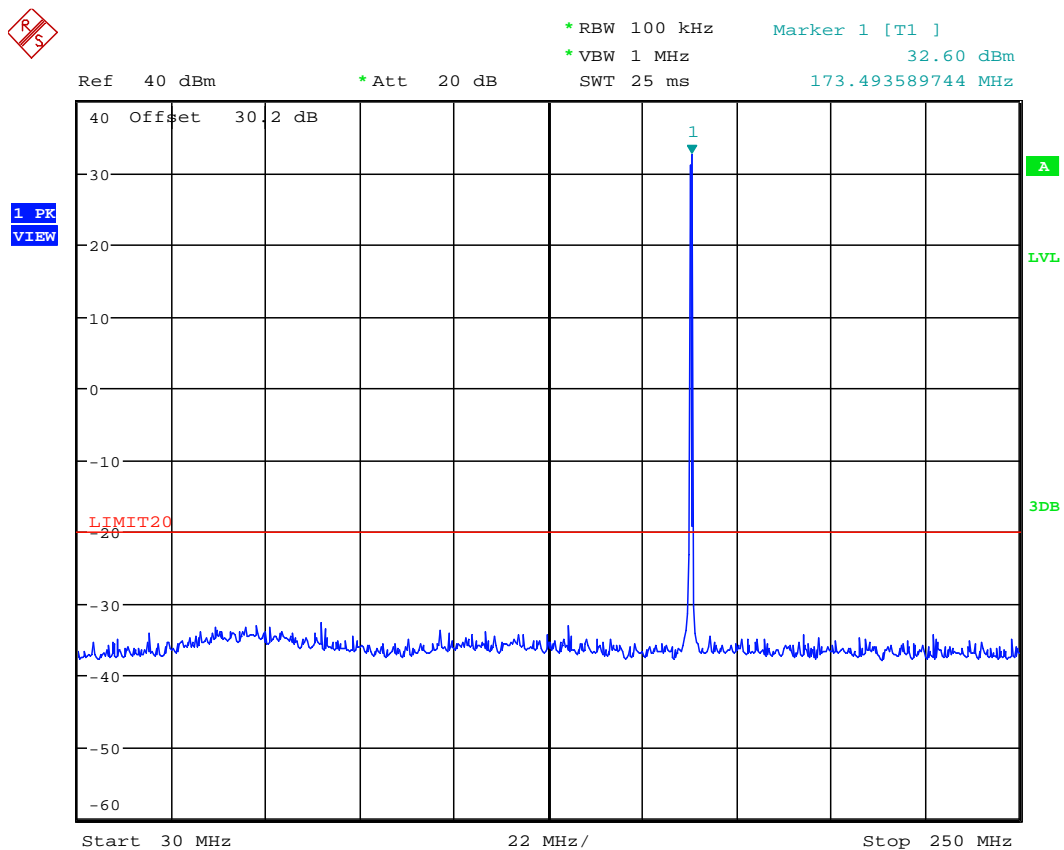

Date: 15.SEP.2022 14:51:00

Low Power

5.9.3.5. Configuration: Tx Conducted, CH A5 138.1MHz, 12.5 KHz, Analog, Low power

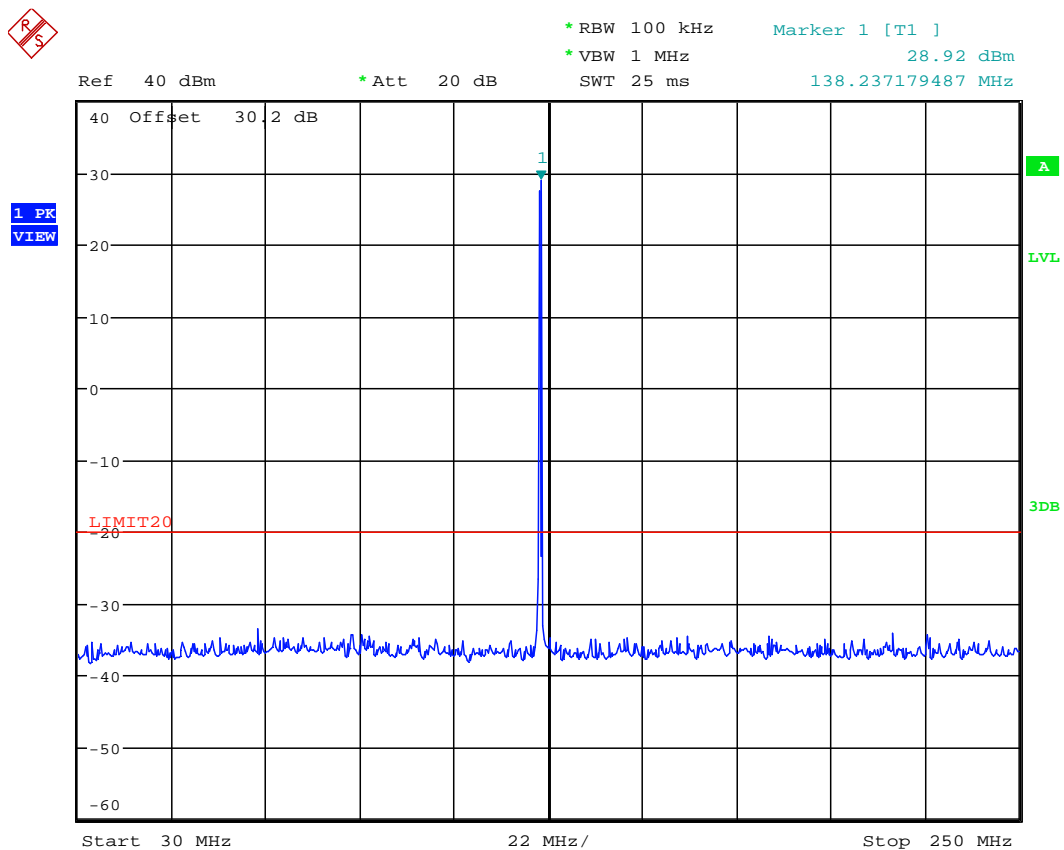

Date: 15.SEP.2022 14:51:58


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

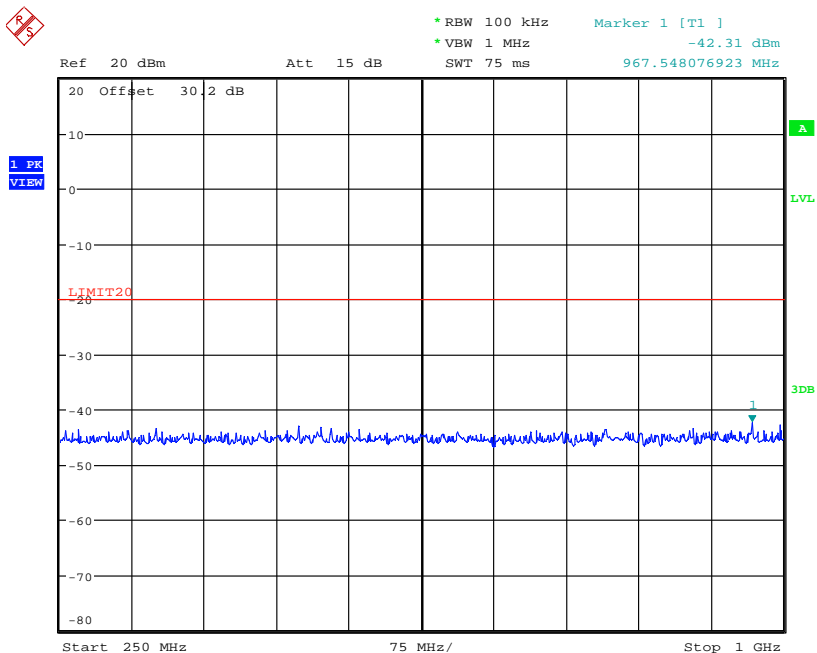

Date: 15.SEP.2022 15:00:20

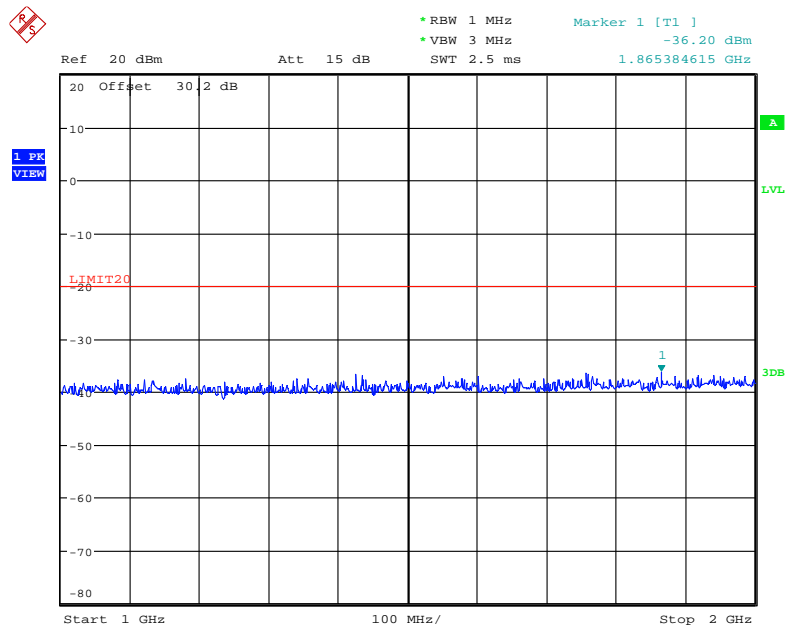

Date: 15.SEP.2022 15:06:23

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.6. Configuration: Tx Conducted, CH A6 151.1MHz, 12.5 KHz, Analog, Low power

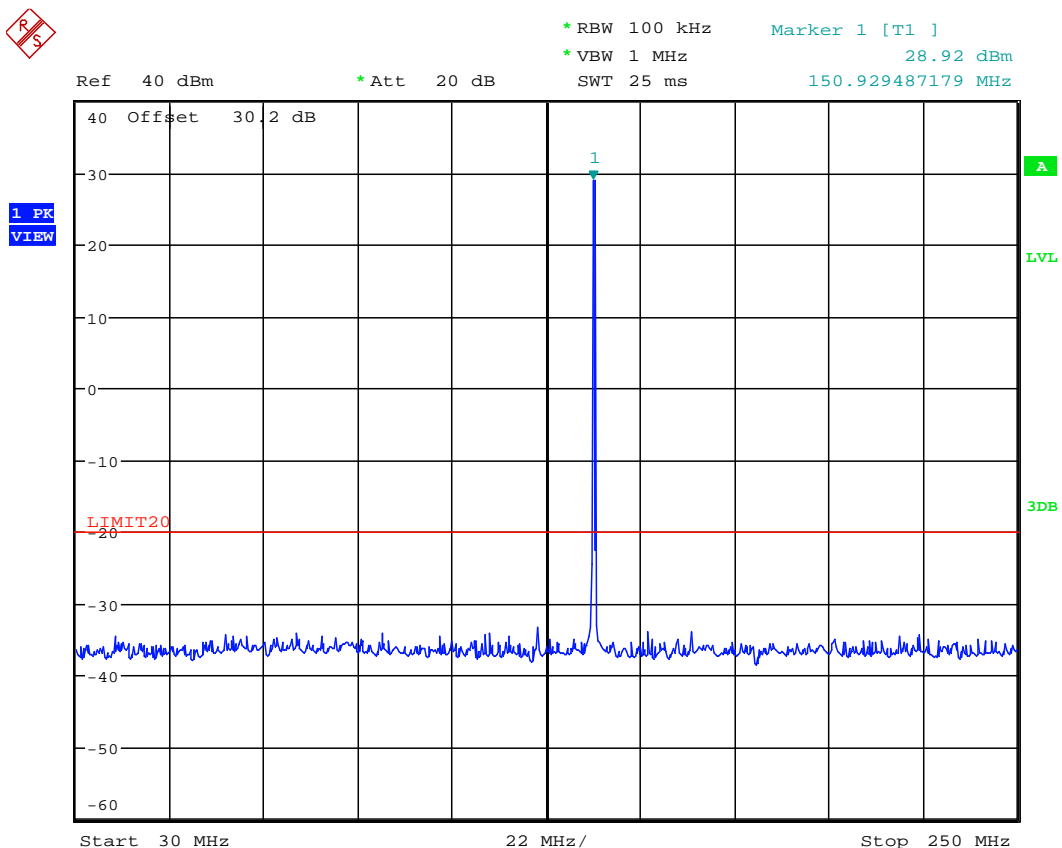

Date: 15.SEP.2022 14:52:34

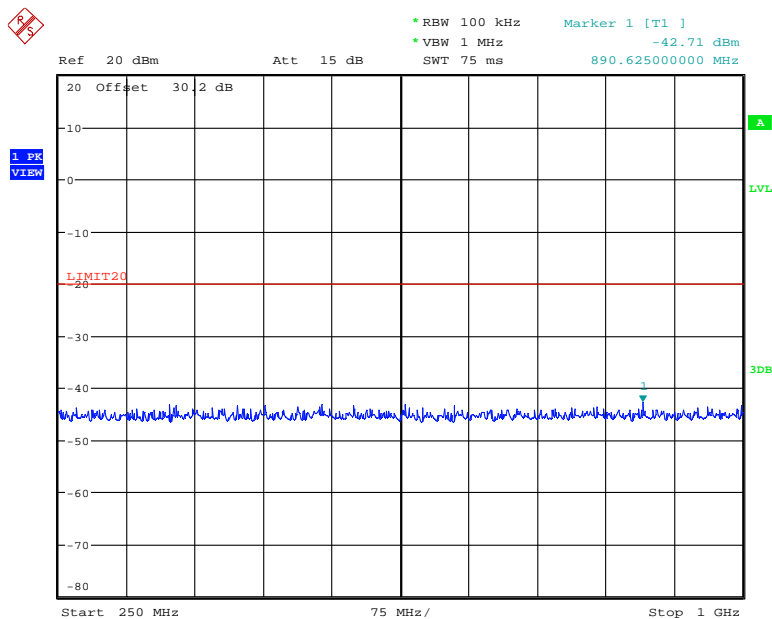

Date: 15.SEP.2022 15:00:53

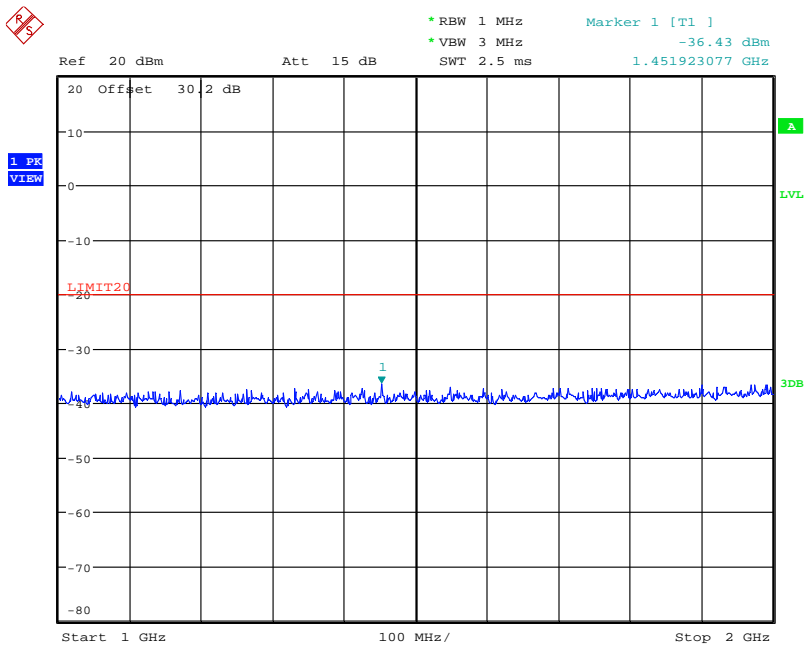

Date: 15.SEP.2022 15:07:08

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.7. Configuration: Tx Conducted, CH A7 157.425MHz, 12.5 KHz, Analog, Low power

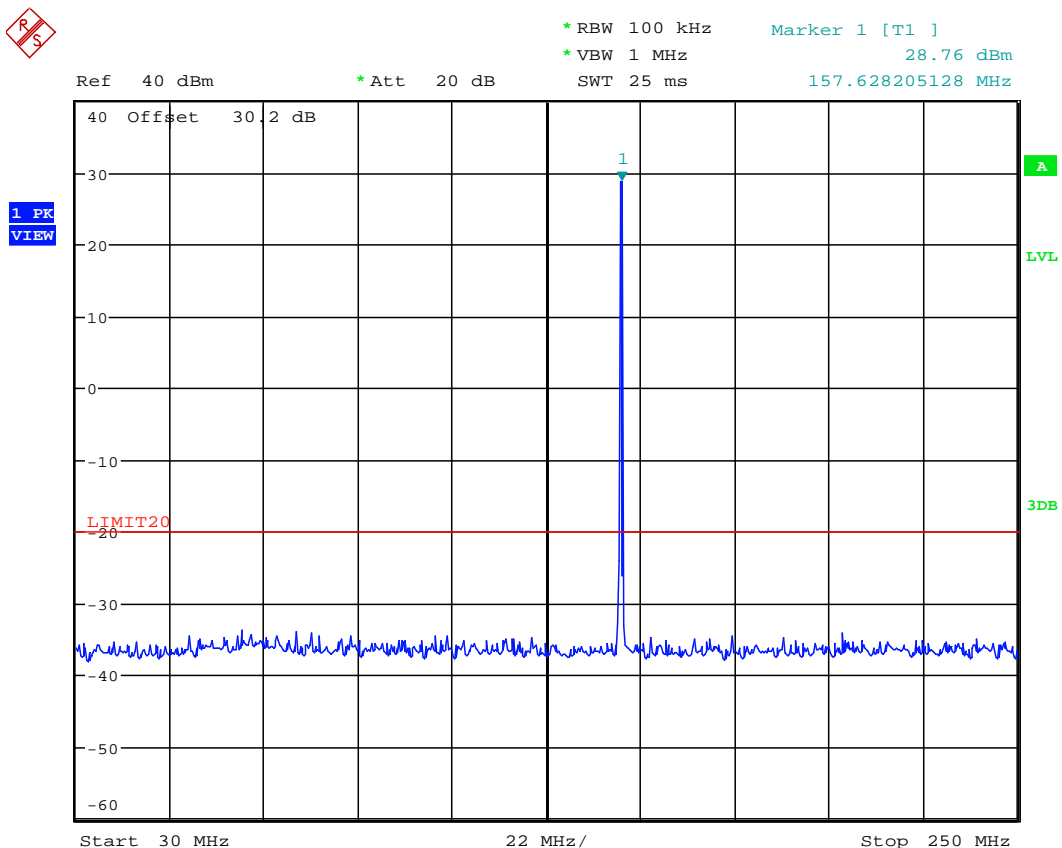

Date: 15.SEP.2022 14:53:06

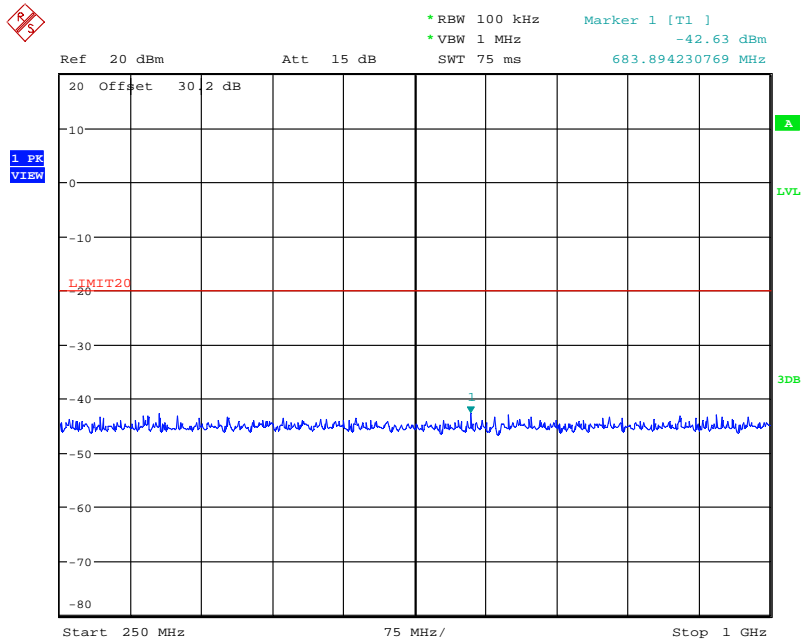

Date: 15.SEP.2022 15:01:28

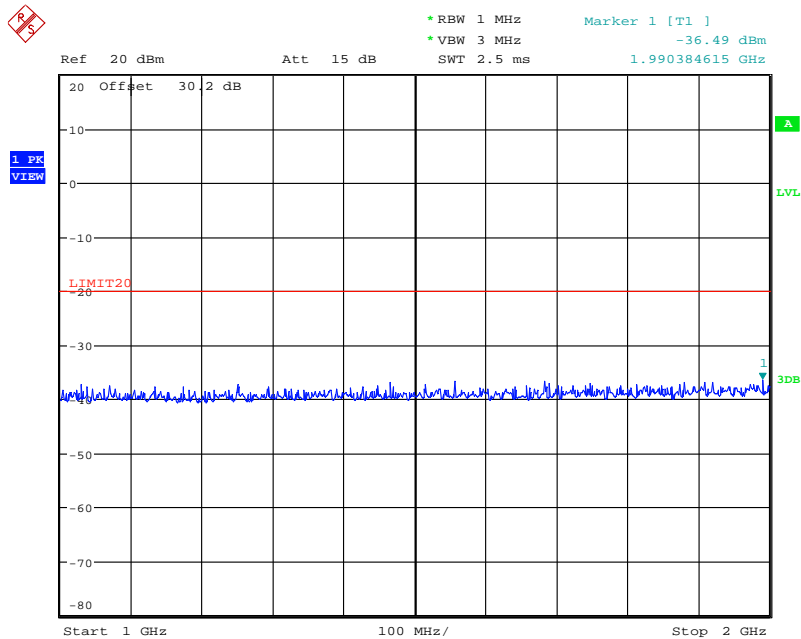

Date: 15.SEP.2022 15:08:00


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

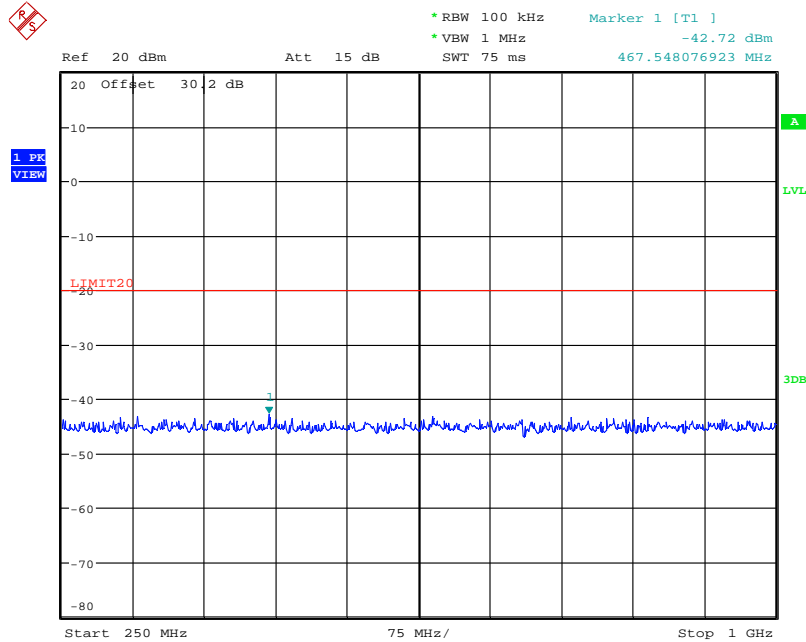

Date: 15.SEP.2022 15:02:08

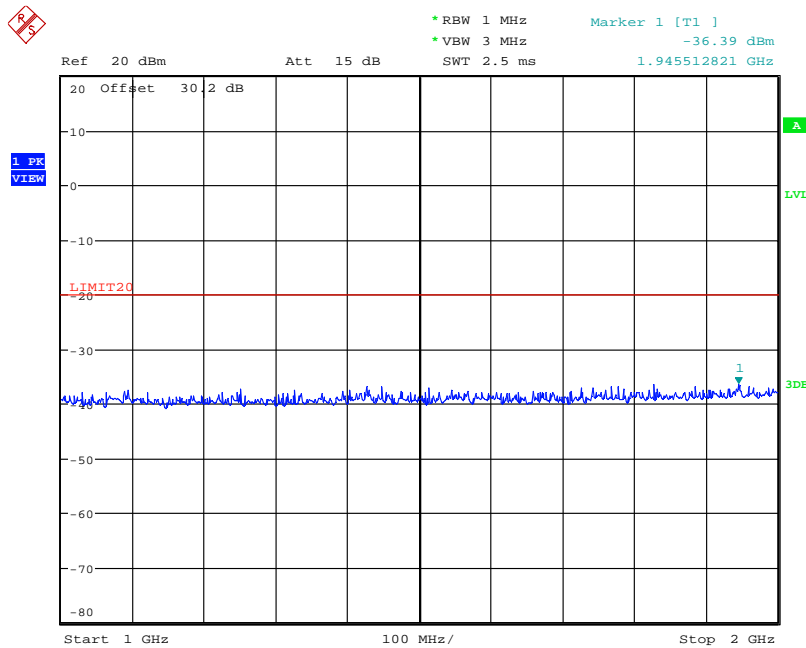

Date: 15.SEP.2022 15:08:43

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022


All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

MARINE
High Power


5.9.3.9. Configuration: Tx Conducted, CH 01A 156.050MHz, 25 KHz, High power

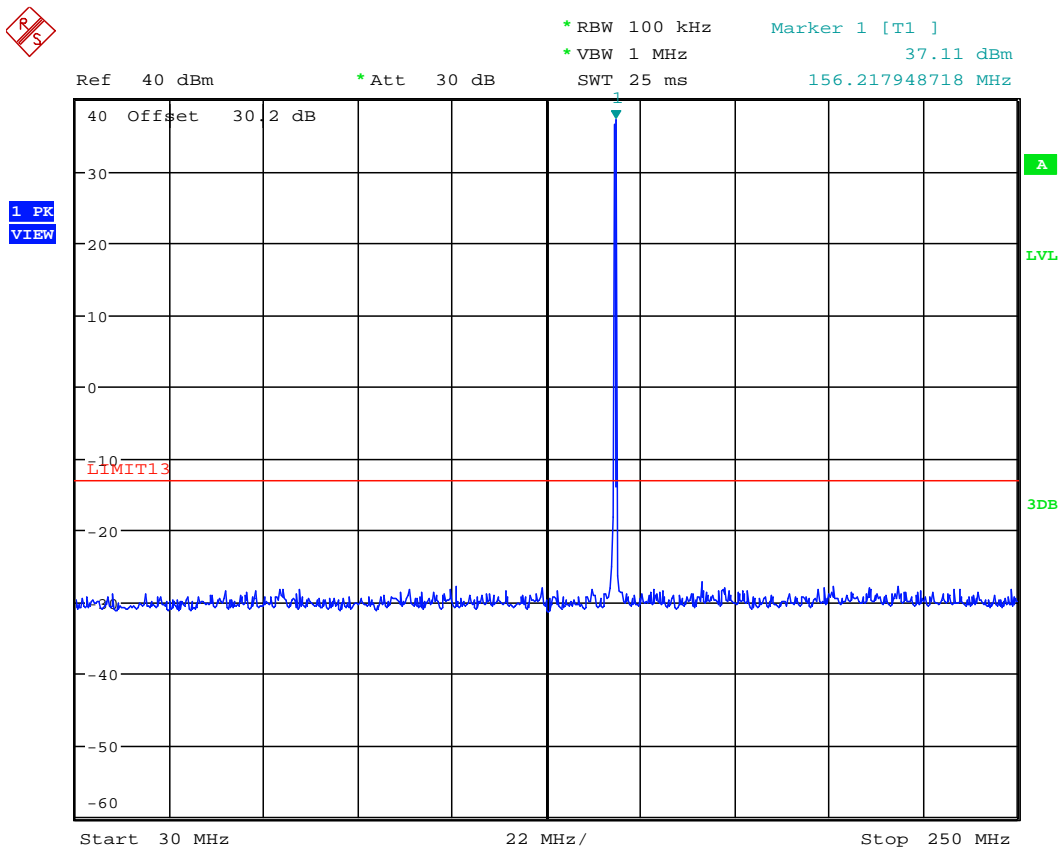

Date: 15.SEP.2022 15:12:01

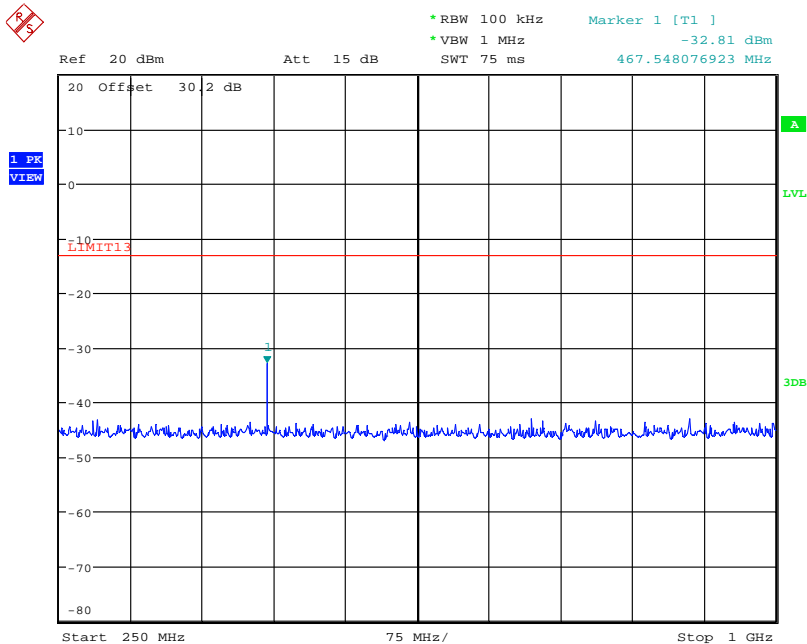

Date: 15.SEP.2022 15:16:05

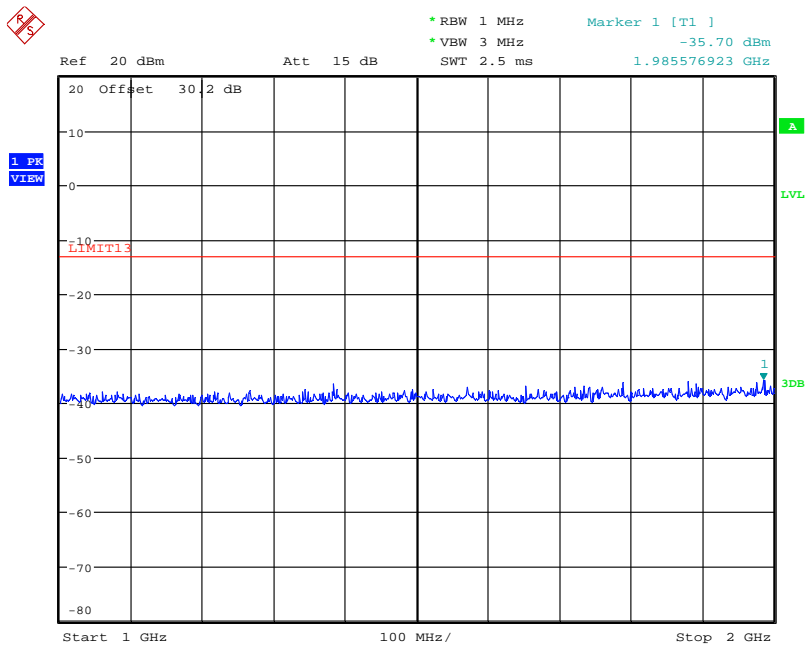

Date: 15.SEP.2022 15:20:35

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.10. Configuration: Tx Conducted, CH 88 157.425MHz, 25 KHz, High power

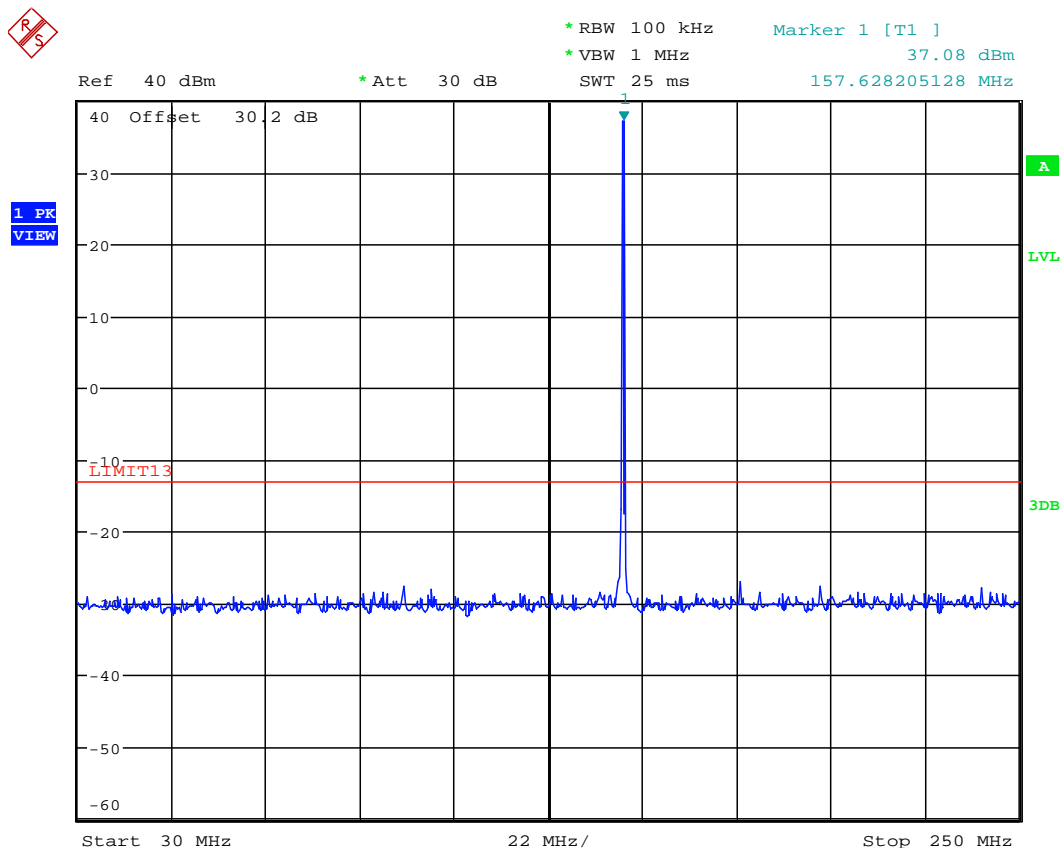

Date: 15.SEP.2022 15:12:42

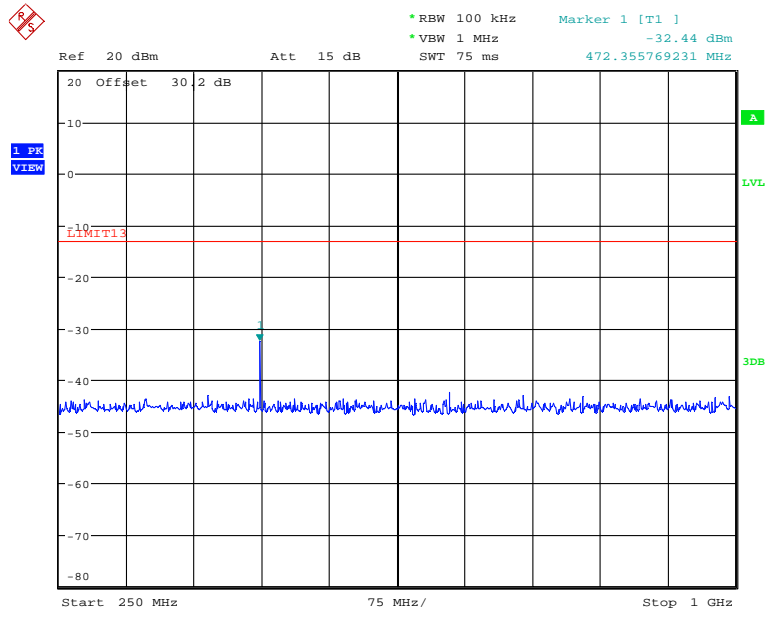


Date: 15.SEP.2022 15:16:49

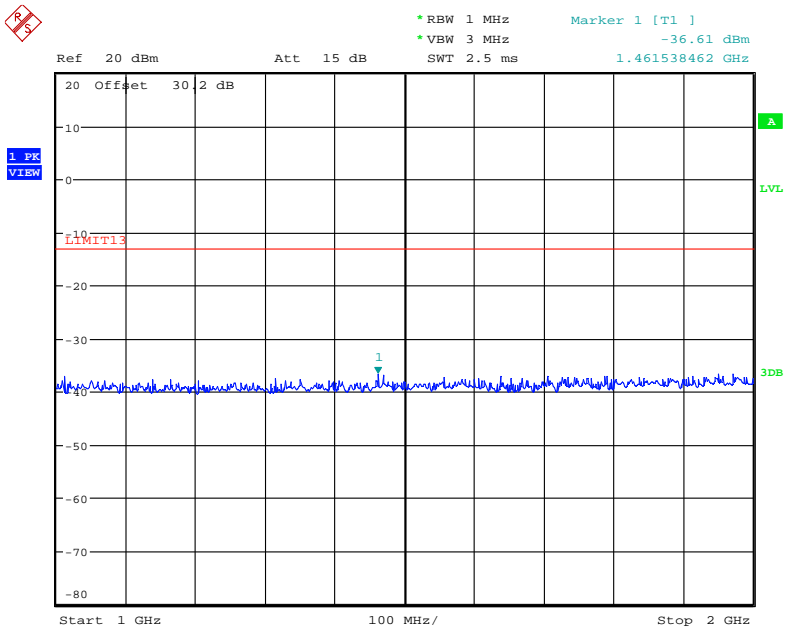

Date: 15.SEP.2022 15:21:41

Low Power

5.9.3.11. Configuration: Tx Conducted, CH 01A 156.050MHz, 25 KHz, Low power

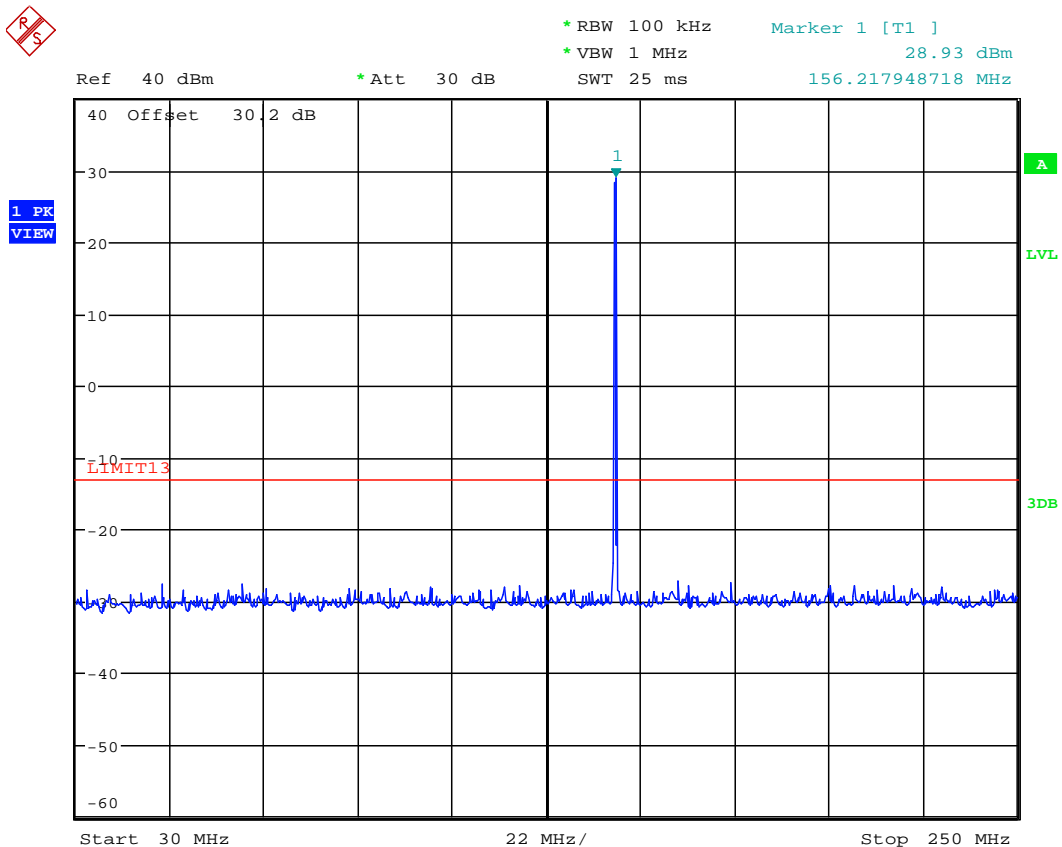

Date: 15.SEP.2022 15:13:25


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

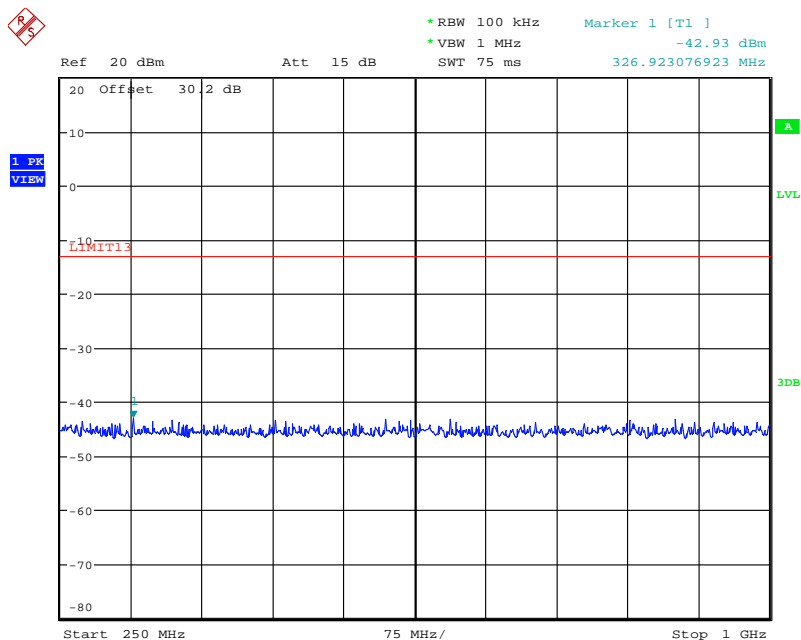

Date: 15.SEP.2022 15:17:29

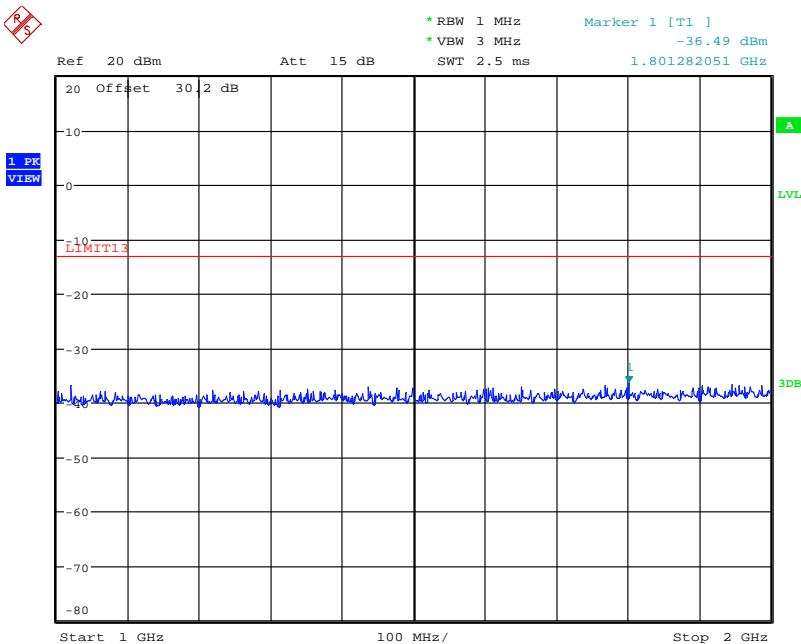

Date: 15.SEP.2022 15:19:46

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


5.9.3.12. Configuration: Tx Conducted, CH 88 157.425MHz, 25 KHz, Low power

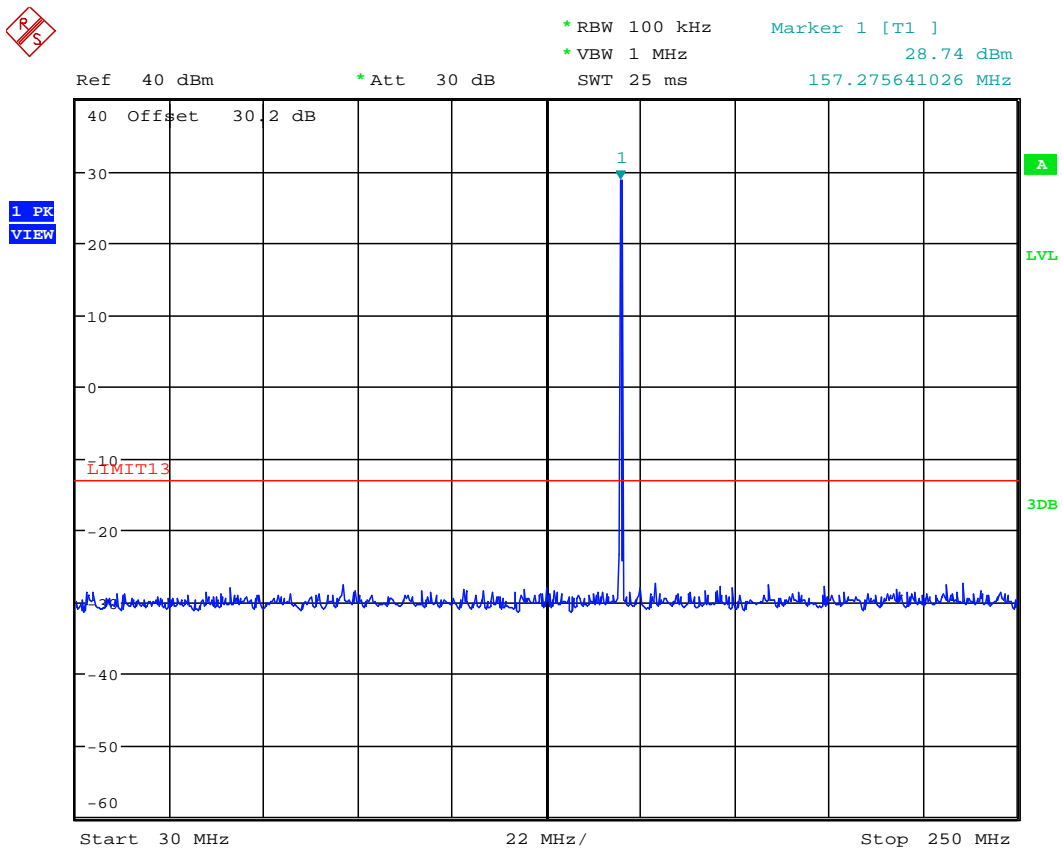

Date: 15.SEP.2022 15:14:03

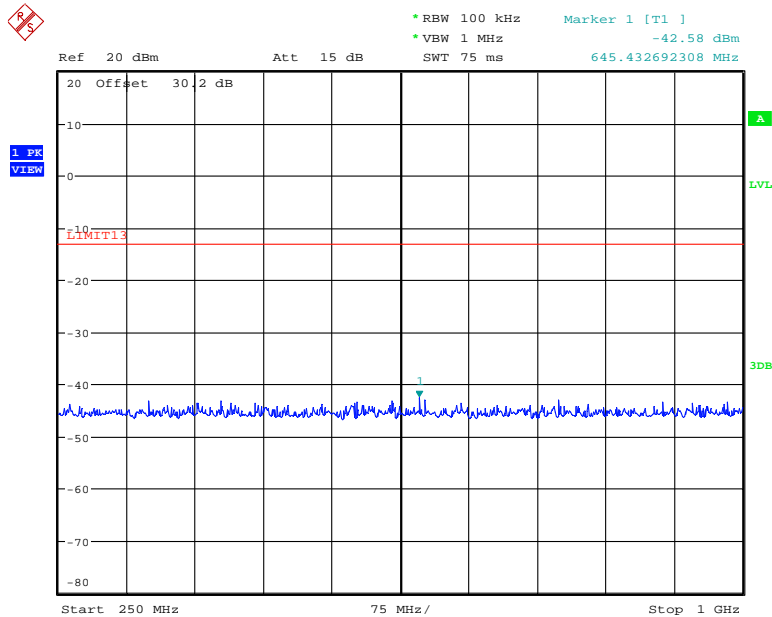

Date: 15.SEP.2022 15:18:10

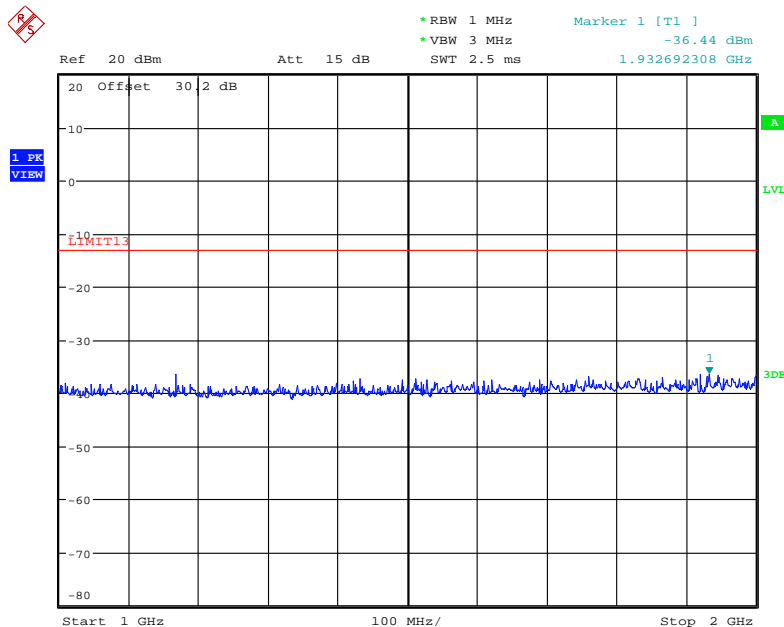

Date: 15.SEP.2022 15:18:57

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.10. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS [§§ 2.1053, 2.1057, 22.359, 80.211(f)(3) & 90.210]

5.10.1. Limits

Emissions shall be attenuated below the mean output power of the transmitter as follows:

FCC Rules	Attenuation Limit (dBc)
§ 22.359	At least 43 + 10 log (P) dB.
§ 80.211(f)(3),	At least 43 + 10log ₁₀ (mean power in watts) dB
§ 90.210(b)	At least 43 + 10 log (P) dB
§ 90.210(d)	At least 50 + 10 log (P) dB or 70 dB, whichever is the lesser attenuation.
§ 90.210(e)	At least 55 + 10 log (P) or 65 dB, whichever is the lesser attenuation.

5.10.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in **Error! Reference source not found.** of this report and its value in dBc is calculated as follows:

- (1) If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- (2) If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
Lowest ERP of the carrier = EIRP – 2.15 dB = P_c + G - 2.15 dB = P_c dBm (conducted) + 0 dBi – 2.15 dB

5.10.3. Test Data

Remarks:

- The radiated emissions were performed with high power setting at 3 m distance to represents the worst-case test configuration.
- There was no difference in spurious/harmonic emissions on the pre-scans for different channel spacing and modulation types. Therefore, the RF spurious/harmonic emissions in this section would be performed for 12.5 KHz channel spacing for LMR at 2 W and for 25kHz for Part 80 frequencies of 156.050 MHz and 157.425 MHz at 5 W.
- The emissions were scanned from 30 MHz to 10th harmonics; all spurious emissions that are in excess of 20dB below the specified limit shall be recorded.

LMR

5.10.3.1. Near Lowest Frequency (138.1 MHz) @ 2W

Test Frequency (MHz):	138.1
Limit (dBm):	-20.0
All emissions are more than 20 dB below the limit line.	

5.10.3.2. Near Middle Frequency (151.1 MHz) @ 2W

Test Frequency (MHz):	151.1
Limit (dBm):	-20.0
All emissions are more than 20 dB below the limit line.	

5.10.3.3. Near Middle Frequency (157.425 MHz) @ 2W

Test Frequency (MHz):	157.425
Limit (dBm):	-20.0
All emissions are more than 20 dB below the limit line.	

5.10.3.4. Near Highest Frequency (173.3 MHz) @ 2W

Test Frequency (MHz):	173.3
Limit (dBm):	-20.0
All emissions are more than 20 dB below the limit line.	

MARINE

5.10.3.5. Near Low Frequency (156.050 MHz) @ 5W

Test Frequency (MHz):	151.050
Limit (dBm):	-13.0
All emissions are more than 20 dB below the limit line.	

5.10.3.6. Near High Frequency (157.425 MHz) @ 5W

Test Frequency (MHz):	157.425
Limit (dBm):	-13.0
All emissions are more than 20 dB below the limit line.	

5.11. FREQUENCY STABILITY [§§ 2.1055, 22.355, 74.464, 80.209 & 90.213]

5.11.1. Limits

§ 90.213 Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
150-174 MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

§ 22.355 Transmitters used must have minimum frequency stability as specified in the following table.

TABLE C-1—FREQUENCY TOLERANCE FOR TRANSMITTERS IN THE PUBLIC MOBILE SERVICES

Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

§ 74.464 - For operations on frequencies above 25 MHz using authorized bandwidths up to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter. For all other operations, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in accordance with the following:

Frequency range	Tolerance (percent)	
	Base station	Mobile station
25 to 30 MHz:		
3 W or less002	.005
Over 3 W002	.002
30 to 300 MHz:		
3 W or less0005	.005
Over 3 W0005	.0005
300 to 500 MHz, all powers00025	.0005

§ 80.209

Frequency Band	Coast Stations		Ship Stations
	Below 3 W	3 to 100 W	
156–162 MHz	10 ppm	¹ 5 ppm	² 10 ppm

¹ For transmitters operated at private coast stations with antenna heights less than 6 meters (20 feet) above ground and output power of 225 Watts or less the frequency tolerance is 10 parts in 10⁶.

² For transmitters in the radiolocation and associated telecommand service operating on 154.585 MHz, 159.480 MHz, 160.725 MHz and 160.785 MHz the frequency tolerance is 15 parts in 10⁶.

5.11.2. Method of Measurements

Refer to Section 8.3 of this report for measurement details

5.11.3. Test Data

Test Frequency:	157.425 Mhz		
Full Power Level:	4.98 W		
Frequency Tolerance Limit:	± 5.0 ppm or ± 787 Hz		
Max. Frequency Tolerance Measured:	180 Hz or 1.14 ppm		
Input Voltage Rating:	7.2 VDC (nominal)		
Ambient Temperature (°C)	Frequency Drift (Hz)		
	Supply Voltage (Nominal) 7.2 VDC	Supply Voltage (Battery End Point) 5.8 VDC	Supply Voltage (Battery Fully Charged) 8.28 VDC
-30	125	--	--
-20	163	--	--
-10	152	--	--
0	180	--	--
10	143	--	--
20	121	128	118
30	95	--	--
40	99	--	--
50	50	--	--
60	-19	--	--

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.12. TRANSIENT FREQUENCY BEHAVIOR [§ 90.214 & 74.462(c)] [RSS-119 § 5.9]

5.12.1. Limits

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t_1 ⁴	± 25.0 KHz	5.0 ms	10.0 ms
t_2	± 12.5 KHz	20.0 ms	25.0 ms
t_3 ⁴	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t_1 ⁴	± 12.5 KHz	5.0 ms	10.0 ms
t_2	± 6.25 KHz	20.0 ms	25.0 ms
t_3 ⁴	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t_1 ⁴	±6.25 KHz	5.0 ms	10.0 ms
t_2	±3.125 KHz	20.0 ms	25.0 ms
t_3 ⁴	±6.25 KHz	5.0 ms	10.0 ms

- t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.
 t_1 is the time period immediately following t_{on} .
 t_2 is the time period immediately following t_1 .
 t_3 is the time period from the instant when the transmitter is turned off until t_{off} .
 t_{off} is the instant when the 1 kHz test signal starts to rise.
- During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 Watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.


5.12.2. Method of Measurements

Refer to Section 8.6 of this test report and ANSI/TIA/EIA-603-D-2010, Section 2.

5.12.4. Test Data

Plot 5.12.4.1. Transient Frequency Behavior for 12.5 kHz Channel Spacing

Test Frequency:	157.425 MHz
Channel Spacing:	12.5 kHz
Power:	High (2W)
Test Conditions:	Switch on condition OFF-ON

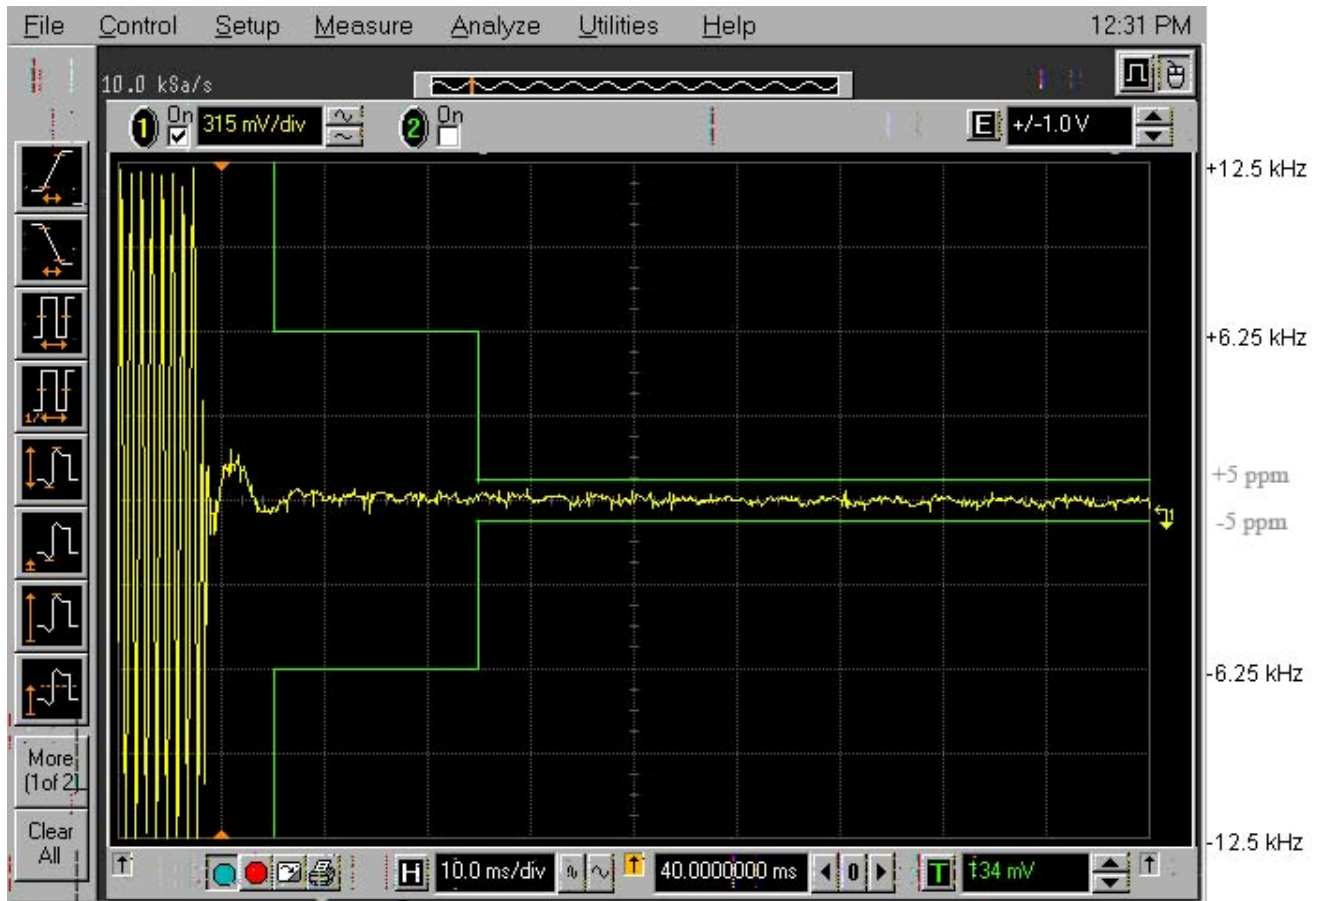

Note: The plot is for reference only and time interval (T1 and T3) limits of 47 CFR 90.214 do not apply to units with six W or less output power

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>



File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.12.4.2. Transient Frequency Behavior for 12.5 kHz Channel Spacing

Test Frequency:	157.425 MHz
Channel Spacing:	12.5 kHz
Power:	High (2W)
Test Conditions:	Switch off condition ON-OFF

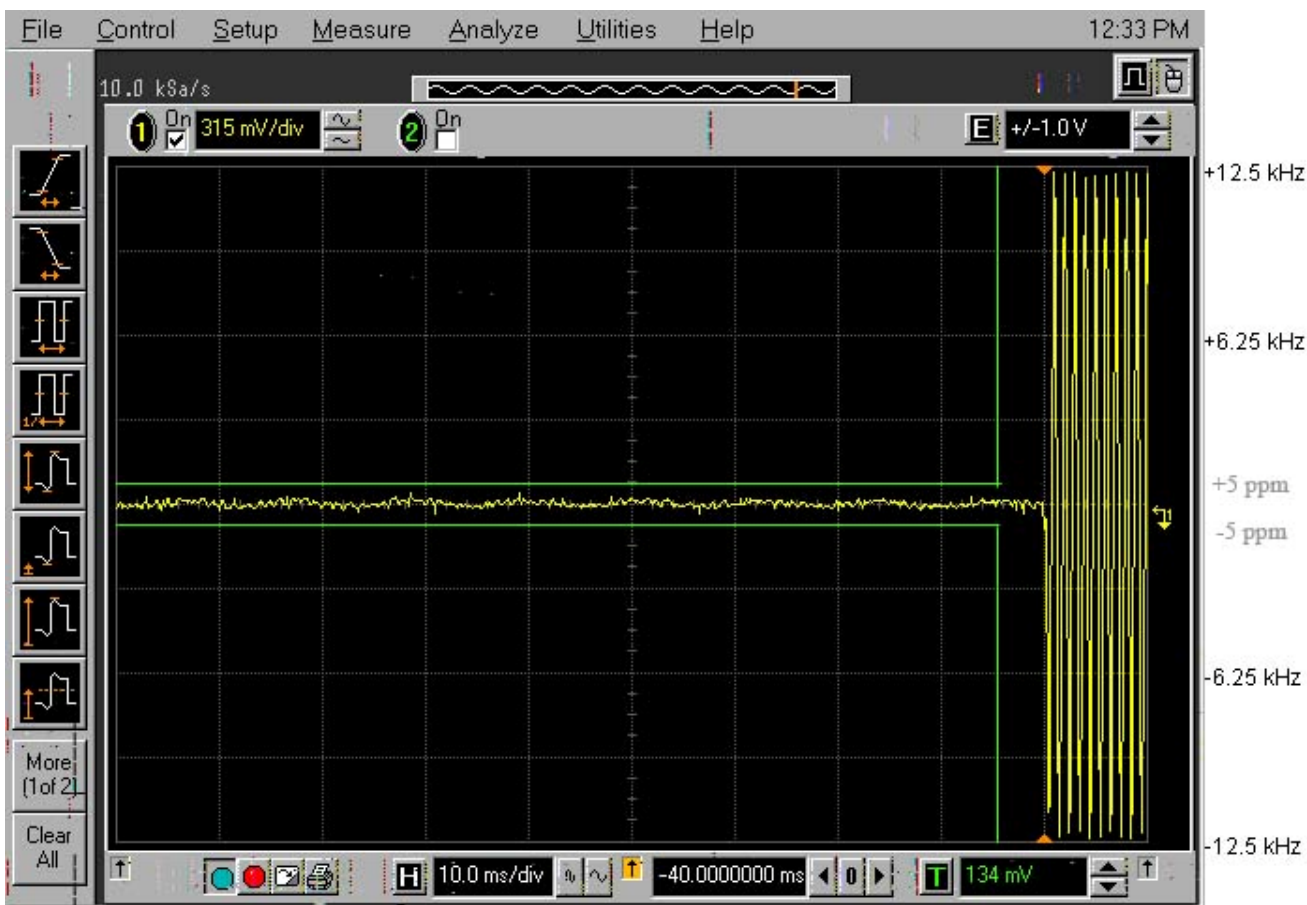

Note: The plot is for reference only and time interval (T1 and T3) limits of 47 CFR 90.214 do not apply to units with six W or less output power

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90
 September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

Plot 5.12.4.3. Transient Frequency Behavior for 25 kHz Channel Spacing


Test Frequency:	157.425 MHz
Channel Spacing:	25 kHz
Power:	High (2W)
Test Conditions:	Switch on condition OFF-ON

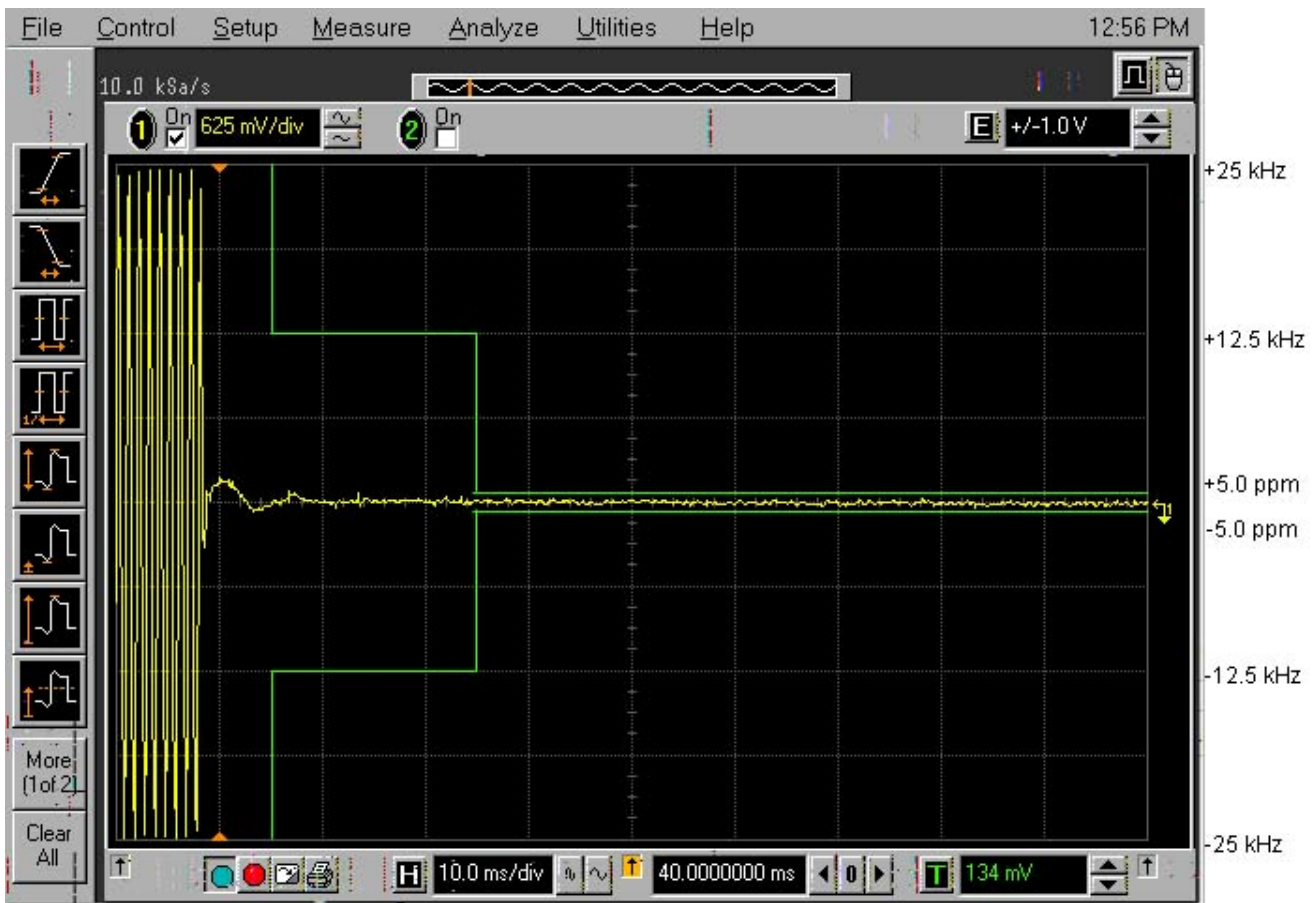

Note: The plot is for reference only and time interval (T1 and T3) limits of 47 CFR 90.214 do not apply to units with six W or less output power

Plot 5.12.4.4. Transient Frequency Behavior for 25 kHz Channel Spacing

Test Frequency:	157.425 MHz
Channel Spacing:	25 kHz
Power:	High (2W)
Test Conditions:	Switch off condition ON-OFF

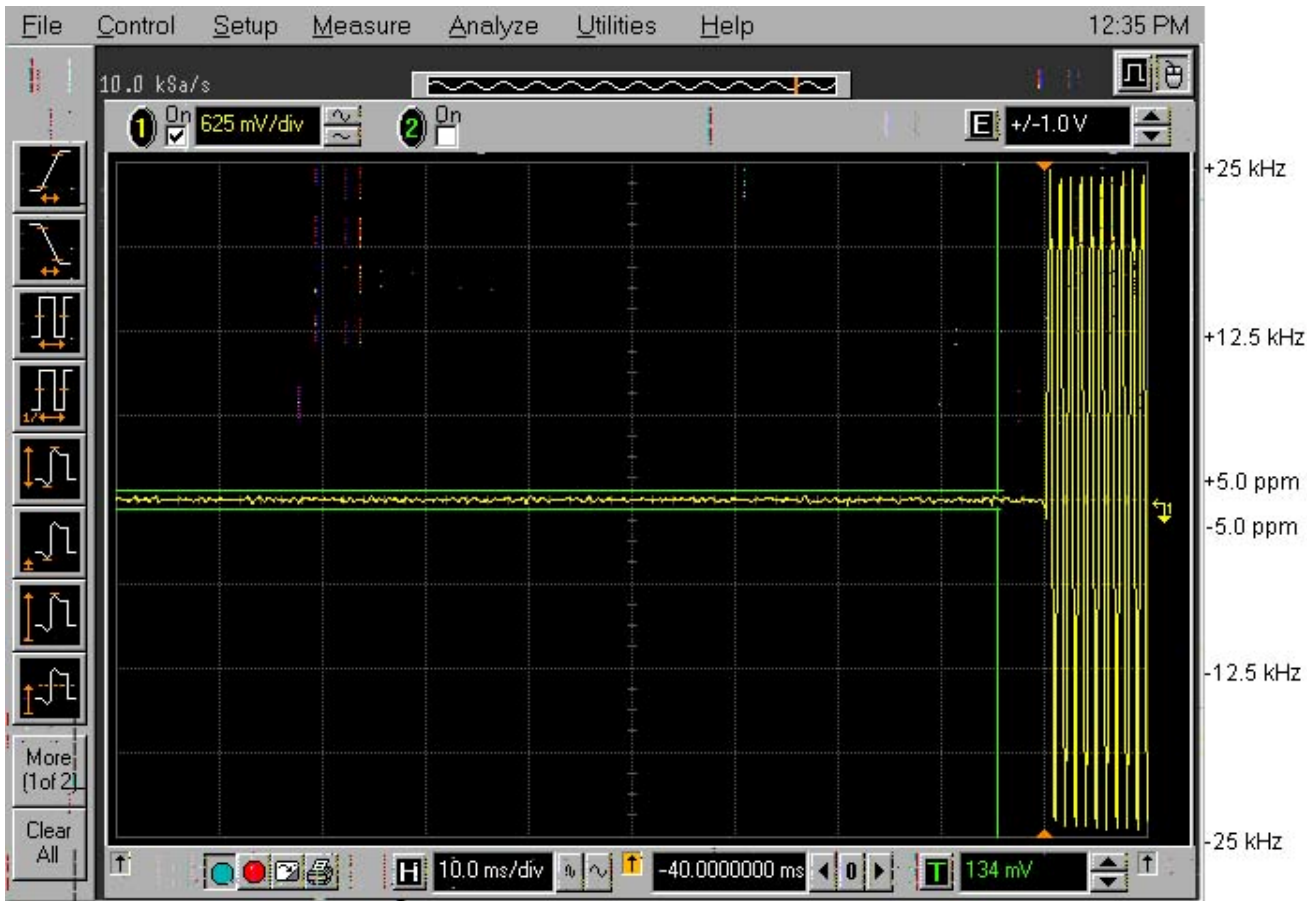

Note: The plot is for reference only and time interval (T1 and T3) limits of 47 CFR 90.214 do not apply to units with six W or less output power

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.13. SUPPRESSION OF INTERFERENCE ABOARD SHIPS [§ FCC 80.217]

5.13.1. Limits

(a) A voluntarily equipped ship station receiver must not cause harmful interference to any receiver required by statute or treaty.

(b) The electromagnetic field from receivers required by statute or treaty must not exceed the following value at a distance over sea water of one nautical mile from the receiver:

or

Deliver not more than the following amounts of power, to an artificial antenna having electrical characteristics equivalent to those of the average receiving antenna(s) use on shipboard:



Frequency of interfering emissions	Field intensity in microvolts per meter	Power to artificial antenna in	
		MicroWatts	dBm
< 30 MHz	0.1	400	-3.98
30-100 MHz	0.3	4000	6.02
100-300 MHz	1.0	40000	16.02
>300 MHz	3.0	400000	26.02


5.13.2. Method of Measurements

Refer to ANSI C63.4.


5.13.3. Test Data

5.13.3.1. Configuration: Rx Conducted, CH 01A, 156.050MHz

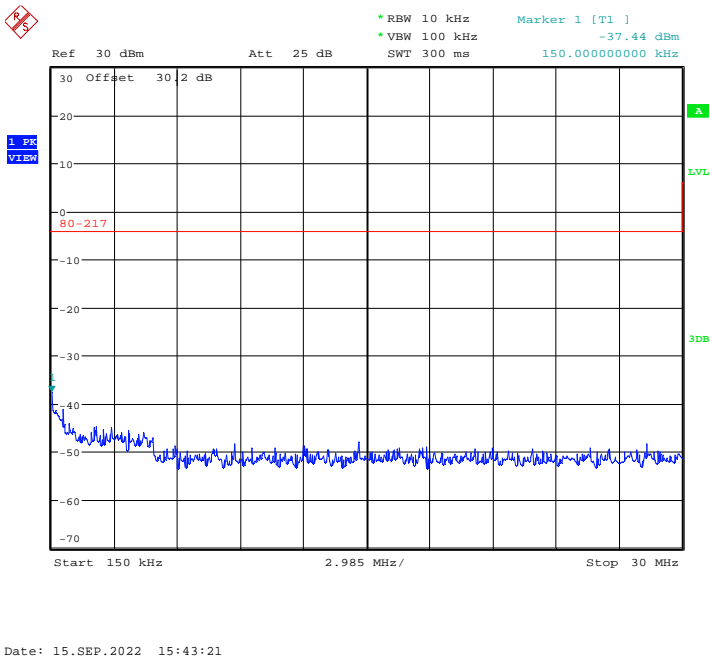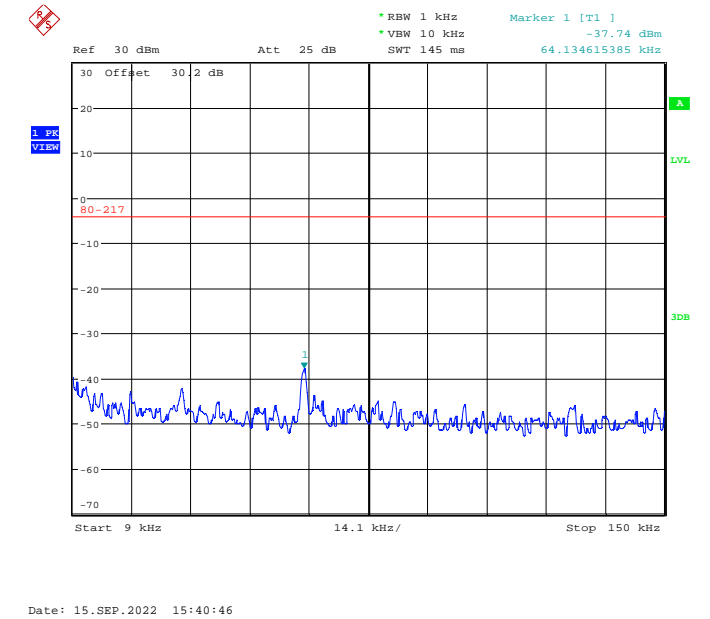

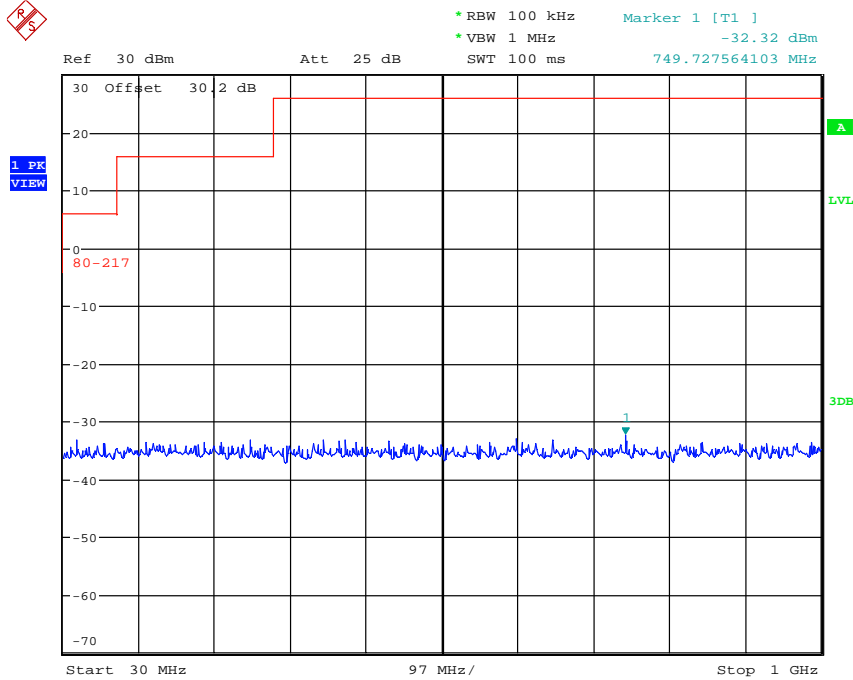

Date: 15.SEP.2022 15:45:58

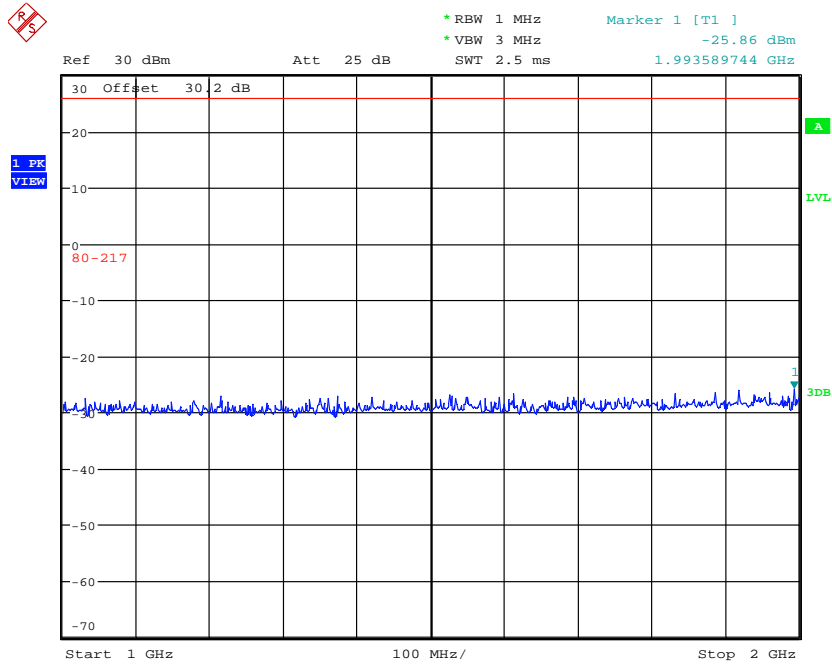

Date: 15.SEP.2022 15:47:48

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90


September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

5.13.3.2. Configuration: Rx Conducted, CH Wx 10, 163.275MHz

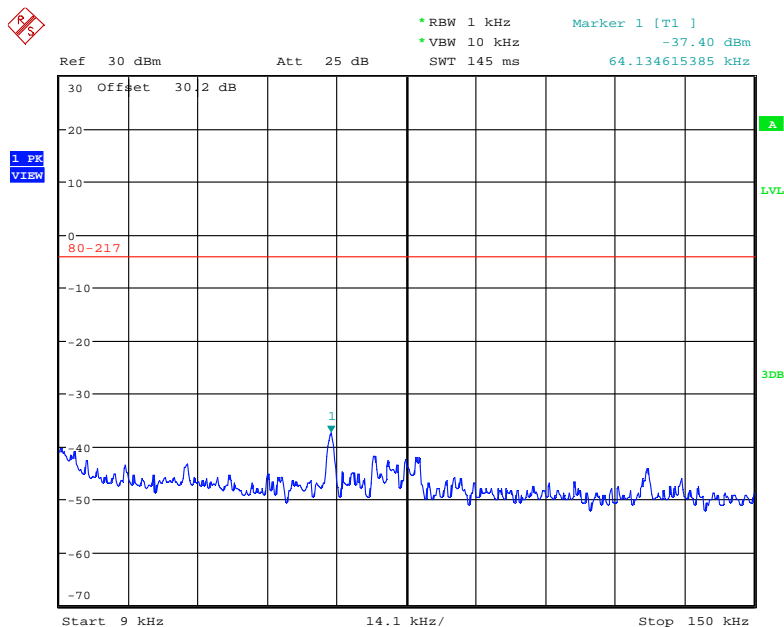

Date: 15.SEP.2022 15:41:58

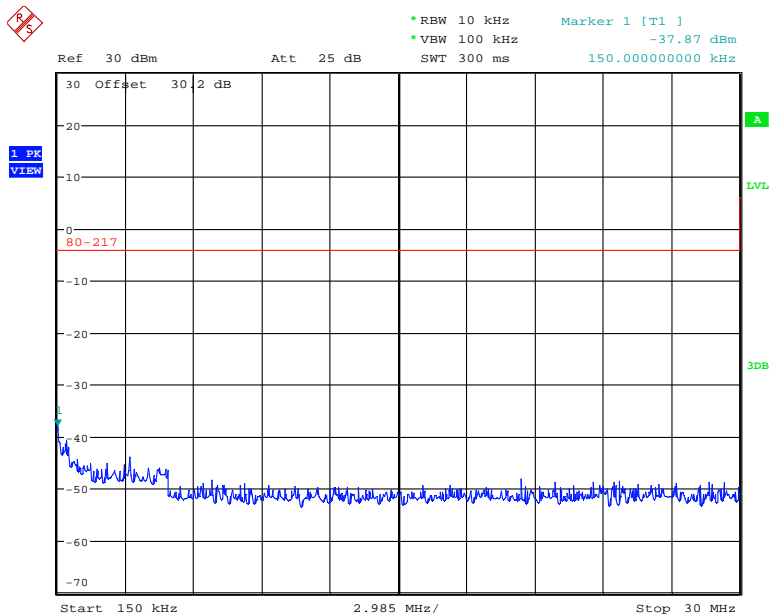

Date: 15.SEP.2022 15:42:41


ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

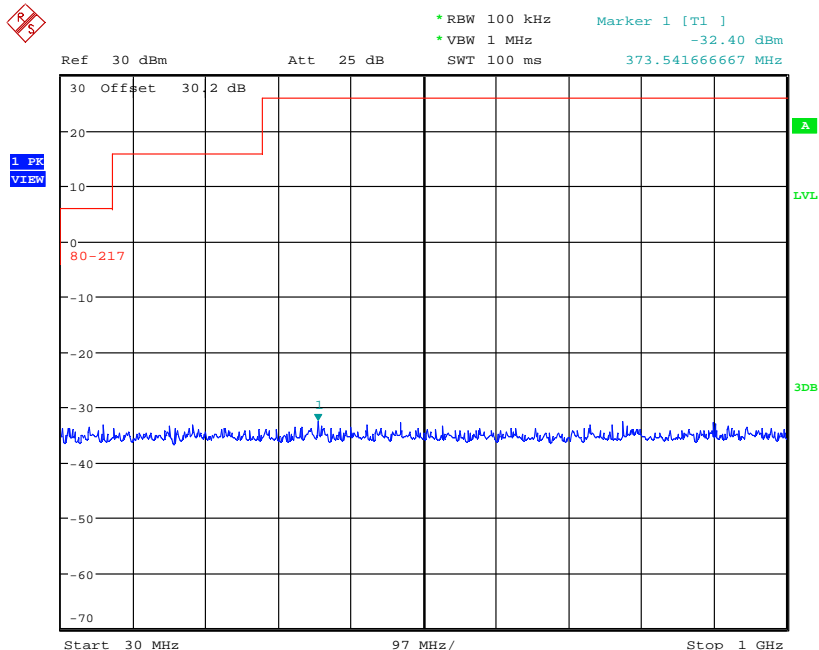

Date: 15.SEP.2022 15:46:29

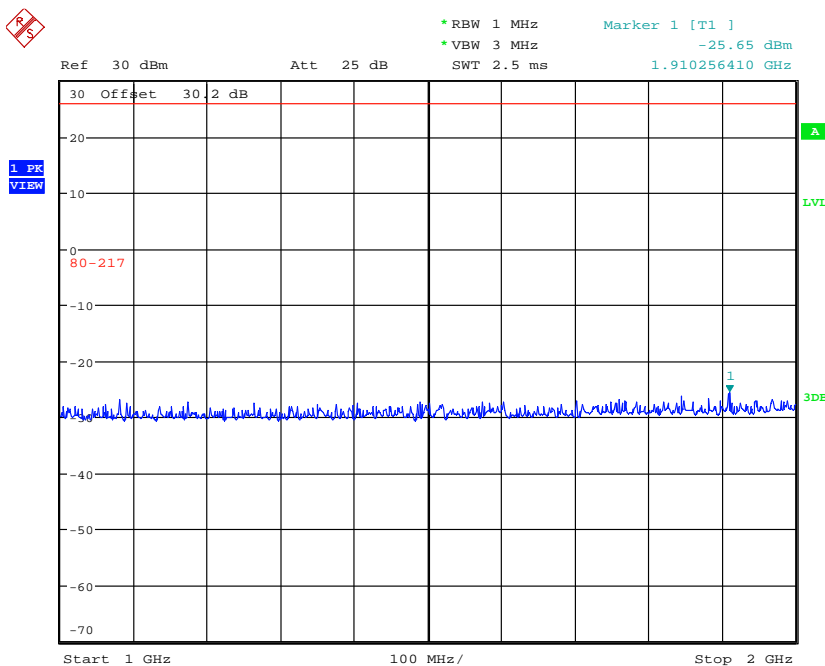

Date: 15.SEP.2022 15:47:01

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>


File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 6. TEST EQUIPMENT LIST AND SETUP

6.1. Conducted Power

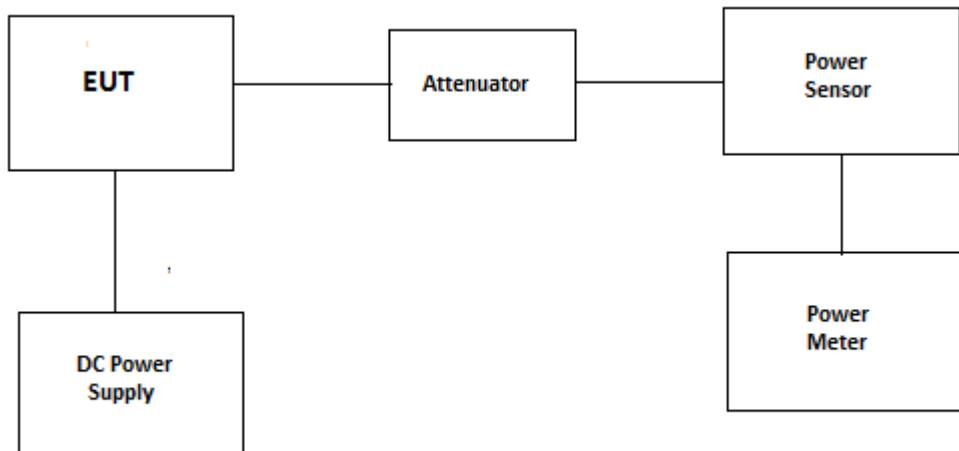

Test Date: Sep 13, 14, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Power Meter	HP	436A	2016A07747	100KHz-sensor dependant	22 Oct 2023
Power Sensor	HP	8482A	MY41172054	0.1MHz-4.2GHz	25 Aug 2023
Attenuator	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.2. Modulation Limit

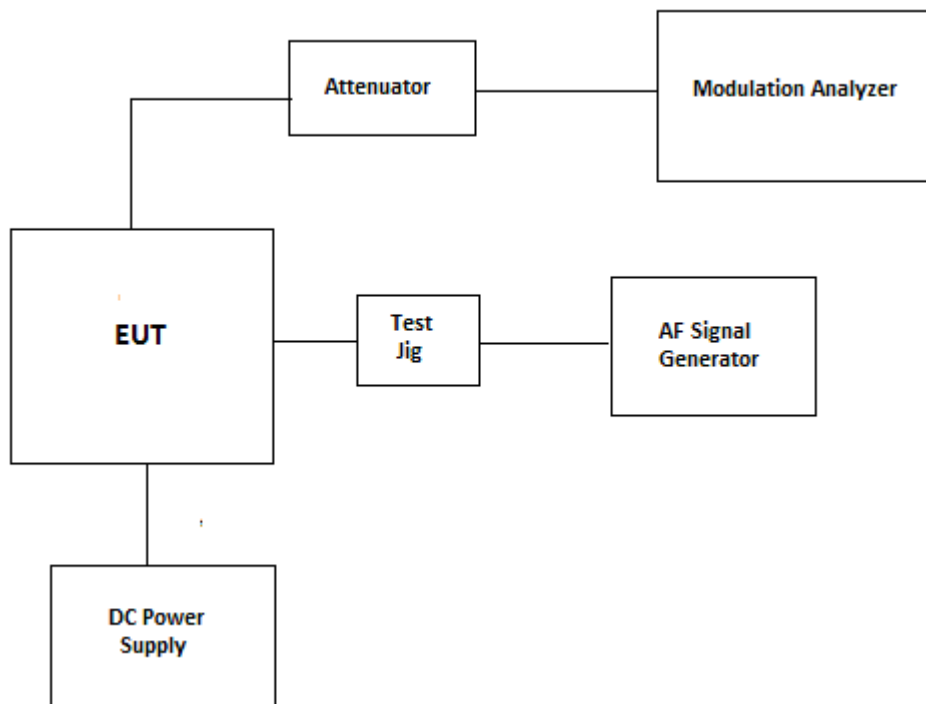

Test Date: Sep 14, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	29 Mar 2024
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Digital Voltmeter	HP	3456A	2015A04523	--	08 Feb 2024
Attenuator	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.3. Audio Frequency Response

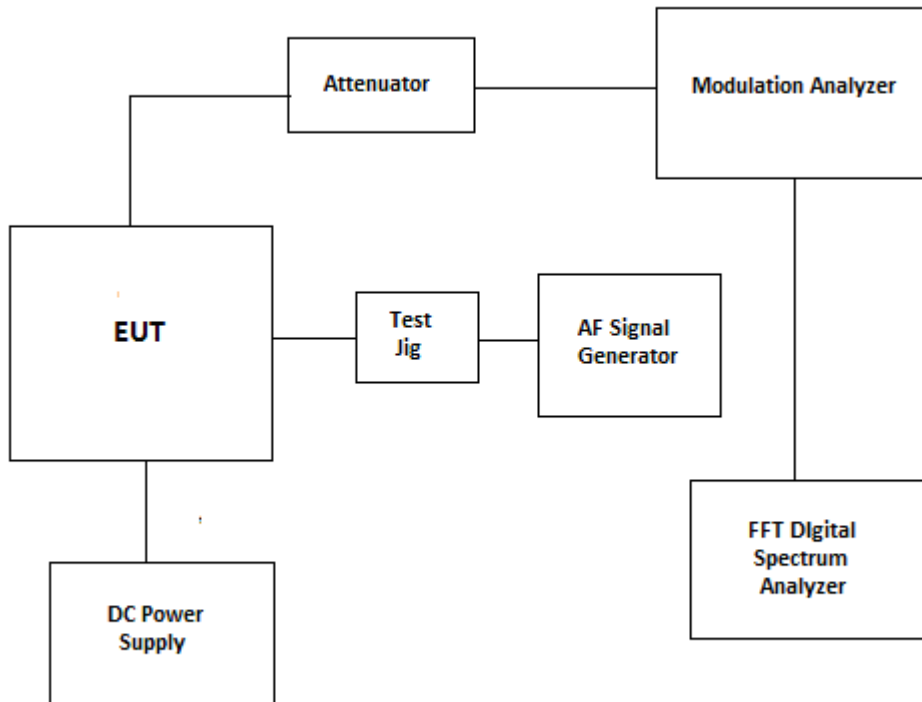

Test Date: Sep 14, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	29 Mar 2024
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Digital Voltmeter	HP	3456A	2015A04523	--	08 Feb 2024
FFT Digital Spectrum Analyzer	Advantest	R9211E	8202336	10MHz-100KHz	02 Nov 2022
Attenuator	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


6.4. Transient Frequency Behavior

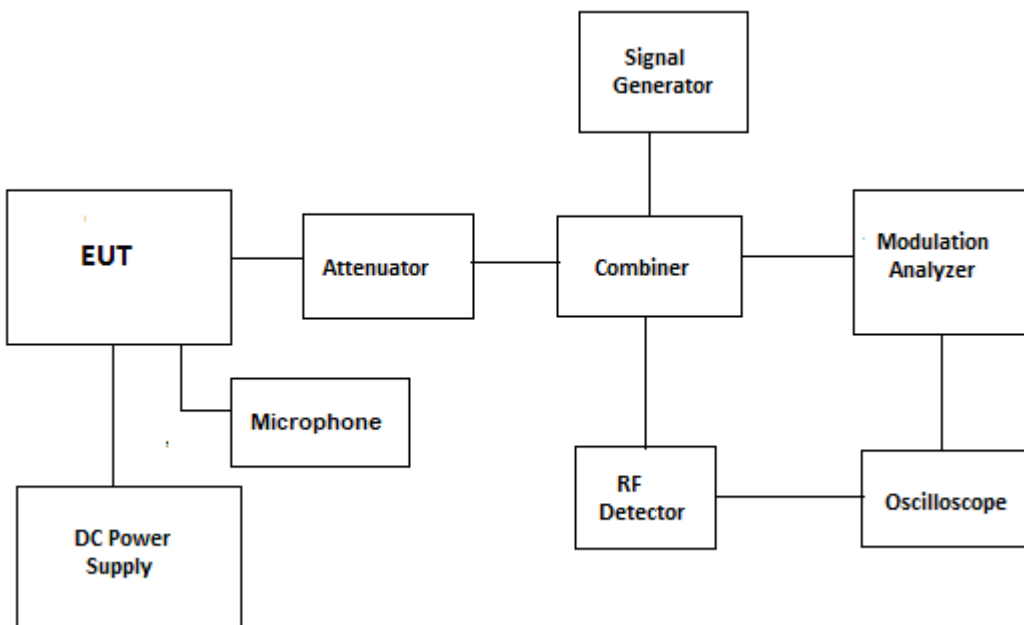

Test Date: Sep 15, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Modulation Analyzer	HP	HP-8901B	3226A04606	150KHz-1300MHz	29 Mar 2024
Signal Generator	IFR	2025	202304/141	9KHz-2.5GHz	02 Dec 2023
Combiner	Mini-Circuit	ZFSC-3-4	15542	1MHz-1GHz	Cal on use
RF Detector	Pasternack	PE8000-50	--	10MHz-1GHz	Cal on use
Attenuator(20dB)	Weinschel	46-20-34	BM1347	DC-18GHz	Cal on use
Attenuator(6 dB)	Weinschel	1A	A67645	DC-12GHz	Cal on use
Oscilloscope	HP	54810A	US38380192	DC-500MHz	10 Nov 2023
Power supply	Pyramid	PS-36KX	--	12-15 Vdc, 35A	--
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

6.5. 99% OBW and Mask

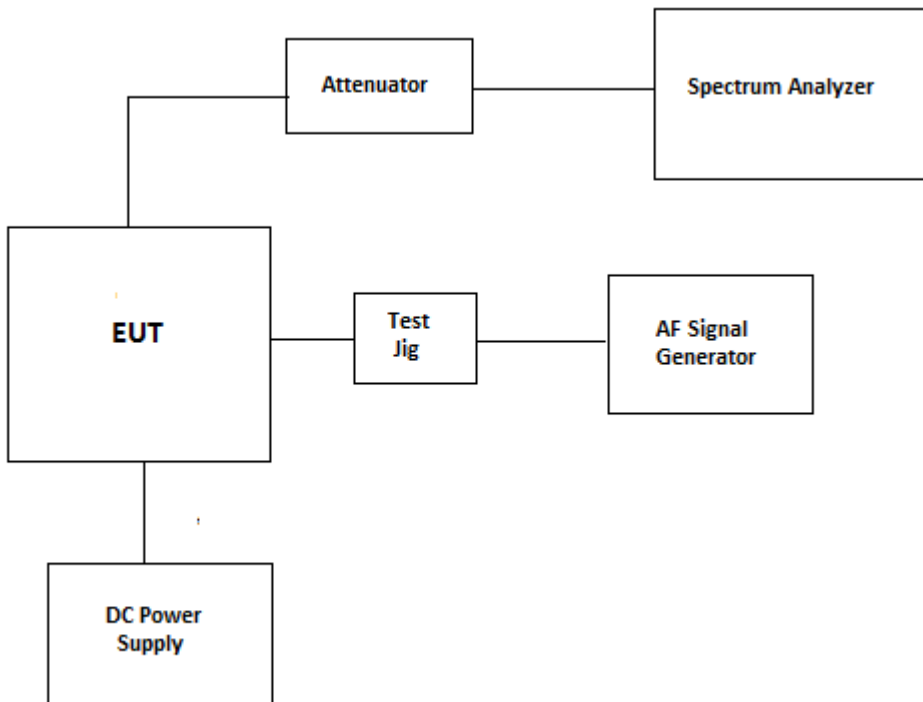

Test Date: Sep 15, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Digital Voltmeter	HP	3456A	2015A04523	---	08 Feb 2024
Attenuator	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


6.6. Tx Conducted Emission

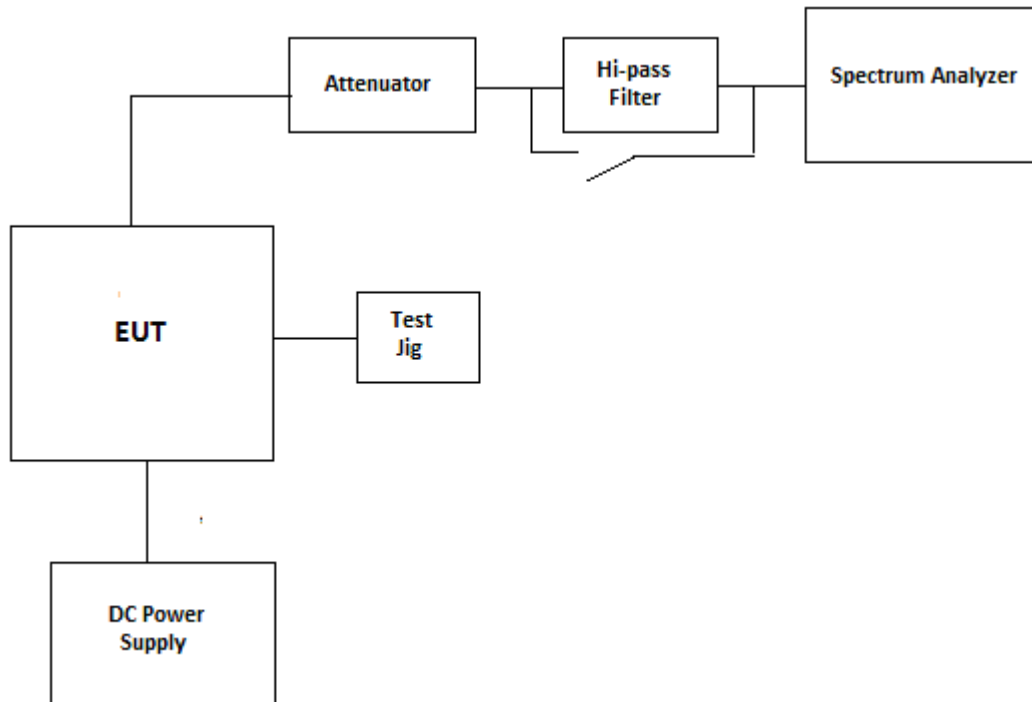

Test Date: Sep 15, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
AF Signal Generator	HP	HP-8920B	US39064699	30MHz-1GHz	29 Mar 2024
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal before use
Attenuator	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

6.7. Rx Conducted Emission

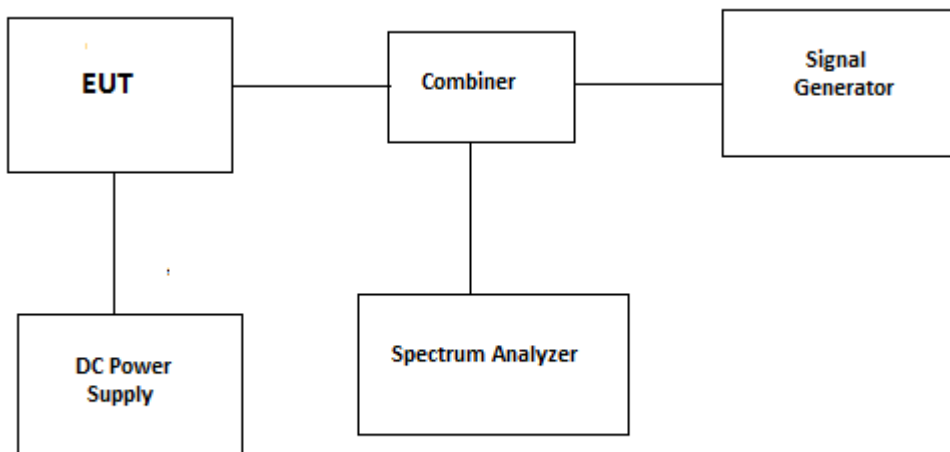

Test Date: Sep 15,16, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Signal Generator	IFR	2025	202304/141	9KHz-2.5GHz	02 Dec 2023
Combiner	Weinschel	1515	PS119	DC-18GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.8. TX Radiated

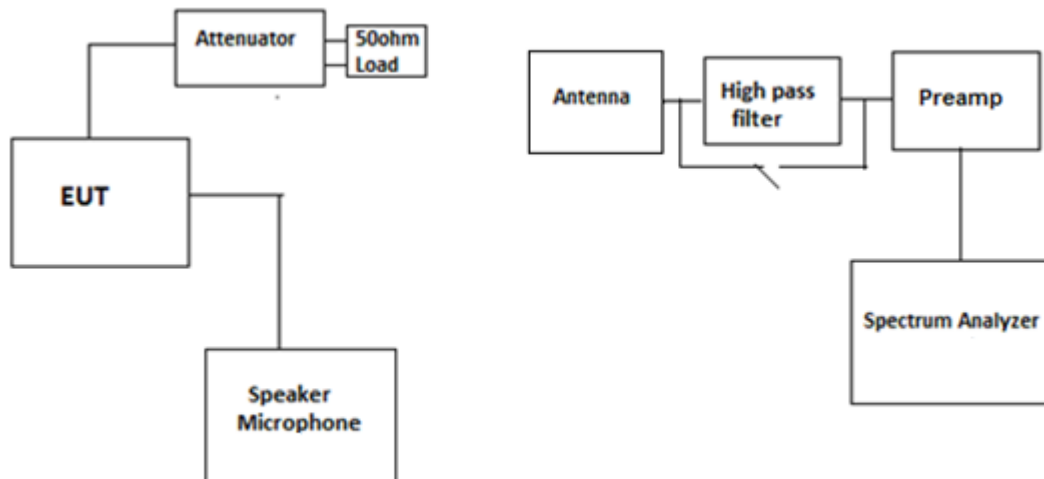

Test Date: Sep 16, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
EMI Receiver	Rohde & Schwarz	ESU40	100037	20Hz-40GHz	27 Sep 2022
Biconilog Antenna	EMCO	3142C	00026873	26-2000MHz	16 Dec 2023
Log Periodic Antenna	ETS	3148	00023845	200-2000MHz	14 Apr 2023
Horn Antenna	ETS	3117	00119425	1-18GHz	20 Jan 2024
Horn Antenna	ETS	3115	5955	1-18GHz	12 Oct 2022
Preamplifier	Com-Power	PAM-118A	551016	500MHz-18GHz	04 Mar 2023
Preamplifier	Com-Power	PAM-103	18020181	1MHz-1000MHz	04 Mar 2023
Hi-pass filter	Mini-Circuit	SHP-250	--	Cut off 250MHz	Cal before use
Attenuator	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal before use
Load(50ohm)	Mini-Circuits	KARN-50+	--	DC-18GHz	Cal before use

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.9. Frequency Stability

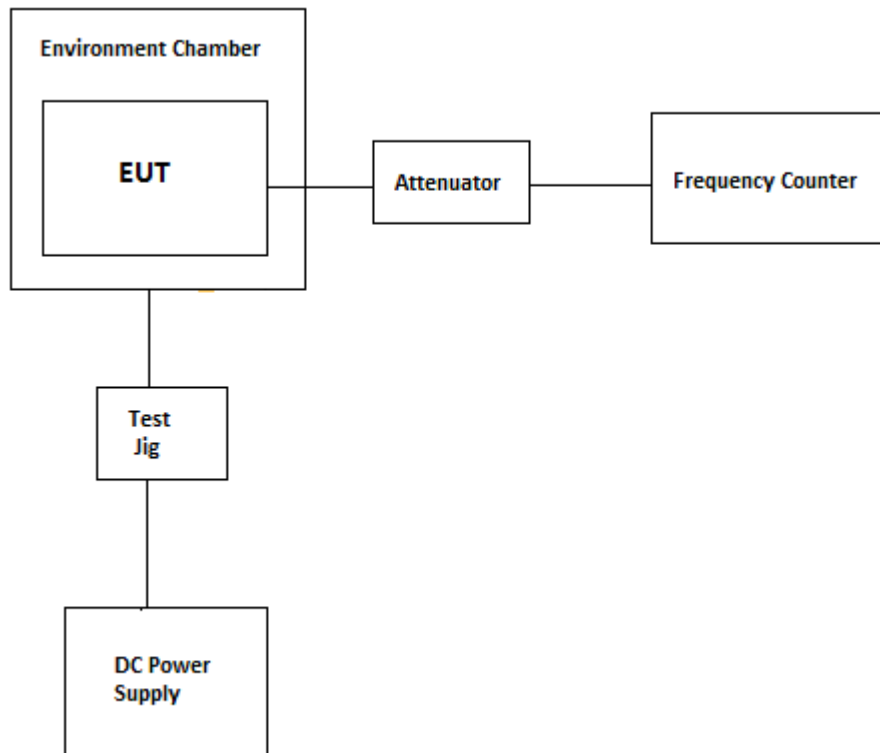

Test Date: Sep 22~23, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Environmental Chamber	Envirotronics	SSH32C	11994847-S-11059	-60 to 177° C	25 Aug 2023
Frequency Counter	HP	5352B	3049A04423	10Hz-40GHz	15 Sep 2024
Attenuator(20dB)	Weinschel	23-20-34	BH7626	DC-18GHz	Cal before use
Attenuator(20dB)	Narda	26298	A577	DC-1GHz	Cal before use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	5436283	---	03 Aug 2023

ULTRATECH GROUP OF LABS


3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

6.10. Suppression of Interference aboard ships

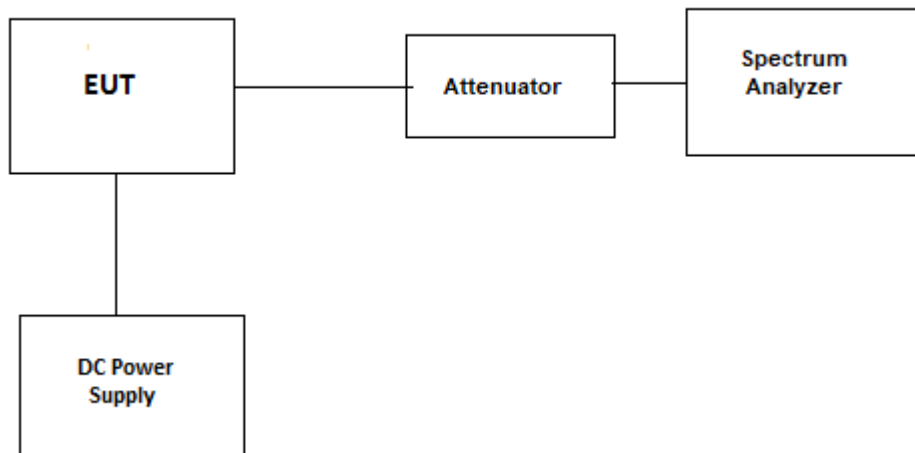

Test Date: Sep 15, 2022

Test Instrument	Manufacturer	Model No	Serial No	Frequency Range	Cal Due date
Spectrum Analyzer	Rohde & Schwarz	FSU	100398	20Hz-26.5GHz	20 Sep 2023
Attenuator(30dB)	Aeroflex\Weinschel	46-30-34	BR9127	DC-18GHz	Cal on use
Power Supply	Tenma	72-6153	-	1-18V, DC 10A	----
Multimeter	Fluke	8842A	4142058	---	01 Oct 2022

ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: <http://www.ultratech-labs.com>

File #: 22ICOM590_FCC90

September 26, 2022

All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

EXHIBIT 7. MEASUREMENT UNCERTAINTY

Test description		Uncertainty
Conducted Output Power		+/- 0.62 dB
Occupied bandwidth		+/-0.2Hz
Emission Mask	Amplitude	+/- 0.63 dB
	Frequency	+/-0.2Hz
Conducted Out of Band/Spurious Emissions		+/- 0.72 dB
Radiated Out of Band/Spurious Emissions	<30 MHz	+/-2.69dB
	30-1000 MHz	+/-4.20dB
	>1 GHz	+/-2.70dB
Frequency Stability		+/-1.2 Hz

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

EXHIBIT 8. MEASUREMENT METHODS

8.1. CONDUCTED POWER MEASUREMENTS

- The following shall be applied to the combination(s) of the radio device and its intended antenna(e).
- If the RF level is user adjustable, all measurements shall be made with the highest power level available to the user for that combination.
- The following method of measurement shall apply to both conducted and radiated measurements.
- The radiated measurements are performed at the Ultratech Calibrated Open Field Test Site.
- The measurement shall be performed using normal operation of the equipment with modulation.

Test procedure shall be as follows:

Step 1: Duty Cycle measurements if the transmitter's transmission is transient

- Using a EMI Receiver with the frequency span set to 0 Hz and the sweep time set at a suitable value to capture the envelope peaks and the duty cycle of the transmitter output signal;
- The duty cycle of the transmitter, $x = T_x \text{ on} / (T_x \text{ on} + T_x \text{ off})$ with $0 < x < 1$, is measure and recorded in the test report. For the purpose of testing, the equipment shall be operated with a duty cycle that is equal or more than 0.1.


Step 2: Calculation of Average EIRP. See Figure 1

- The average output power of the transmitter shall be determined using a wideband, calibrated RF average power meter with the power sensor with an integration period that exceeds the repetition period of the transmitter by a factor 5 or more. The observed value shall be recorded as "A" (in dBm);
- The e.i.r.p. shall be calculated from the above measured power output "A", the observed duty cycle x, and the applicable antenna assembly gain "G" in dBi, according to the formula:

$$\text{EIRP} = \text{A} + \text{G} + 10\log(1/x)$$

{X = 1 for continuous transmission => $10\log(1/x) = 0$ dB}

Figure 1.

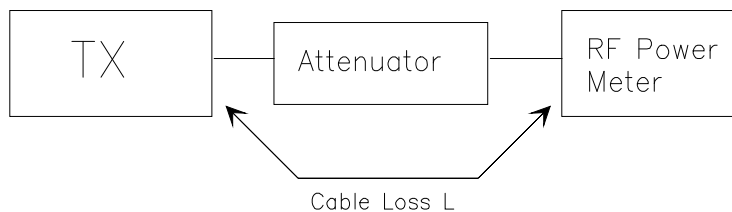

8.2. RADIATED POWER MEASUREMENTS (ERP & EIRP) USING SUBSTITUTION METHOD

8.2.1. MAXIMIZING RF EMISSION LEVEL (E-FIELD)

- (a) The measurements were performed with full rf output power and modulation.
- (b) Test was performed at listed 3m open area test site (listed with FCC, IC, ITI, NVLAP, ACA & VCCI).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dB}\mu\text{V/m)} = \text{Reading (dB}\mu\text{V)} + \text{Total Correction Factor (dB/m)}$

- (f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency
Resolution BW: 100 KHz
Video BW: same
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (l) Repeat for all different test signal frequencies.

8.2.2. Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source
Resolution BW: 100 KHz
Video BW: VBW > RBW
Detector Mode: positive
Average: off
Span: 3 x the signal bandwidth

- (b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

- (c) Select the frequency and E-field levels obtained in the Section 8.2.1 for ERP/EIRP measurements.
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
(f) Use one of the following antenna as a receiving antenna:
 - ◆ DIPOLE antenna for frequency from 30-1000 MHz or
 - ◆ HORN antenna for frequency above 1 GHz }.(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
(i) Tune the EMI Receivers to the test frequency.
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 \text{ dB}$$

$$\text{Total Correction factor in EMI Receiver \# 2} = L2 - L1 + G1$$

Where: P: Actual RF Power fed into the substitution antenna port after corrected.
P1: Power output from the signal generator
P2: Power measured at attenuator A input
P3: Power reading on the Average Power Meter
EIRP: EIRP after correction
ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
(p) Repeat step (d) to (o) for different test frequency
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Figure 2


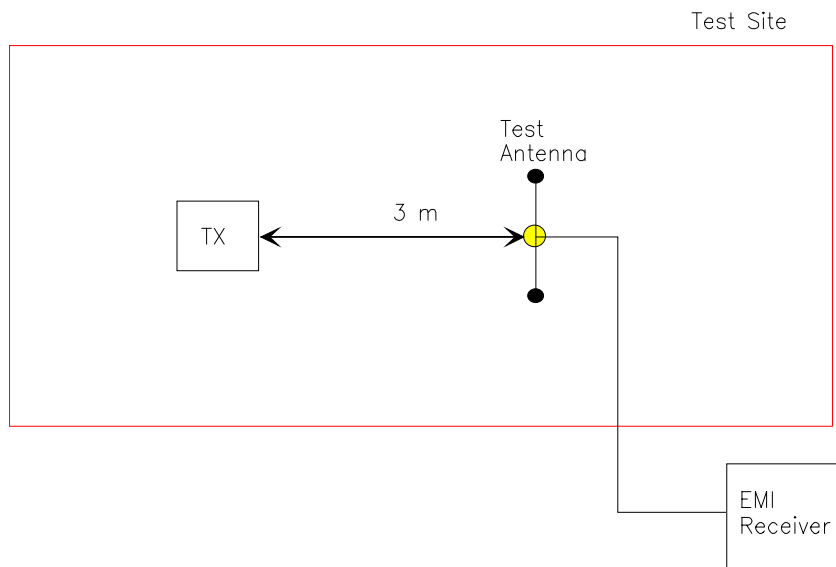


Figure 3

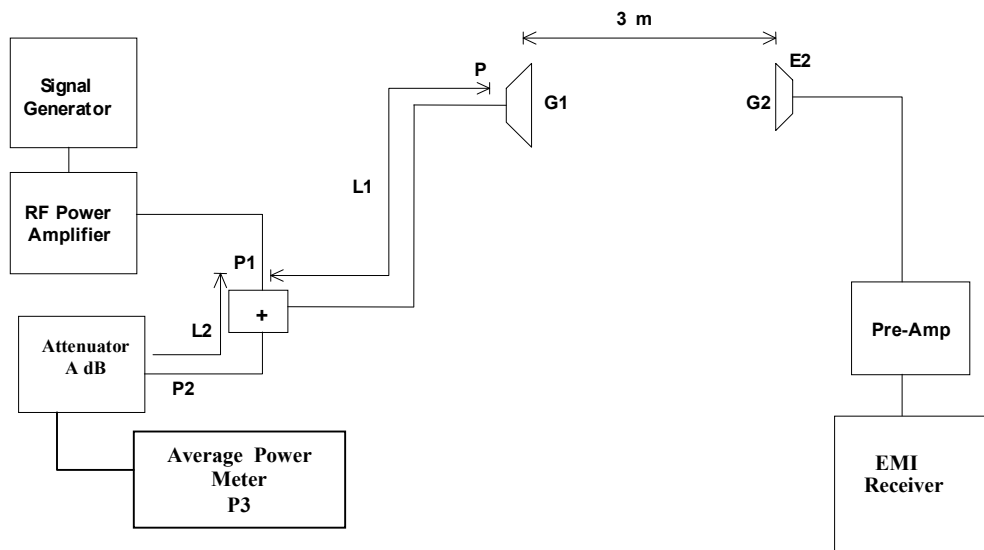

8.3. FREQUENCY STABILITY

Refer to FCC @ 2.1055.

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).

8.4. EMISSION MASK

Voice or Digital Modulation Through a Voice Input Port @ 2.1049(c)(i):- The transmitter was modulated by a 2.5 KHz tone signal at an input level 16 dB greater than that required to produce 50% modulation (e.g.: ± 2.5 KHz peak deviation at 1 KHz modulating frequency). The input level was established at the frequency of maximum response of the audio modulating circuit.

Digital Modulation Through a Data Input Port @ 2.1049(h):- Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the Emission Masks shall be shown for operation with any devices used for modifying the spectrum when such devices are operational at the discretion of the user.

The following EMI Receiver bandwidth shall be used for measurement of Emission Mask/Out-of-Band Emission Measurements:

- (1) For 25 KHz Channel Spacing: RBW = 300 Hz
- (2) For 12.5 KHz or 6.25 KHz Channel Spacings: RBW = 100 Hz

The all cases the Video Bandwidth shall be equal or greater than the measuring bandwidth.

8.5. SPURIOUS EMISSIONS (CONDUCTED)

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 30 KHz minimum, VBW \geq RBW and SWEEP TIME = AUTO). The transmitter was operated at a full rated power output, and modulated as follows:

FCC 47 CFR 2.1057 - Frequency spectrum to be investigated: The spectrum was investigated from the lowest radio generated in the equipment up to at least the 10th harmonic of the carrier frequency or to the highest frequency practicable in the present state of the art of measuring techniques, whichever is lower. Particular attention should be paid to harmonics and subharmonics of the carrier frequency. Radiation at the frequencies of multiplier stages should be checked. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

FCC 47 CFR 2.1051 - Spurious Emissions at Antenna Terminal: The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of the harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in 2.1049 as appropriate. The magnitude of spurious emissions, which are attenuated more than 20 dB below the permissible value, need not be specified.

8.6. TRANSIENT FREQUENCY BEHAVIOR

1. Connect the transmitter under tests as shown in the above block diagram
2. Set the signal generator to the assigned frequency and modulate with a 1 KHz tone at ± 12.5 KHz deviation and its output level to be 50 dB below the transmitter rf output at the test receiver end.
3. Set the horizontal sweep rate on the storage scope to 10 milliseconds per division and adjust the display to continuously view the 1000 Hz tone from the Demodulator Output Port (DOP) of the Test Receiver. Adjust the vertical scale amplitude control of the scope to display the 1000 Hz at ± 4 divisions vertical Center at the display.
4. Adjust the scope so it will trigger on an increasing magnitude from the RF trigger signal of the transmitter under test when the transmitter was turned on. Set the controls to store the display.
5. The output at the DOP, due to the change in the ratio of the power between the signal generator input power and transmitter output power will, because of the capture effect of the test receiver, produce a change in display: For the first part of the sweep it will show the 1 KHz test signal. Then once the receiver's demodulator has been captured by the transmitter power, the display will show the frequency difference from the assigned frequency to the actual transmitter frequency versus time. The instant when the 1 KHz test signal is completely suppressed (including any capture time due to phasing) is considered to be t_{on} . The trace should be maintained within the allowed divisions during the period t_1 and t_2 .
6. During the time from the end of t_2 to the beginning of t_3 the frequency difference should not exceed the limits set by the FCC in Part 90.214 and the outlined in the Carrier Frequency Stability sections. The allowed limit is equal to FCC frequency tolerance limits specified in FCC 90.213.
7. Repeat the above steps when the transmitter was turned off for measuring t_3 .

END OF REPORT