

TYPE OF EXHIBIT:	TEST REPORT
FCC PART:	2.1033 (c)(14)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

The following is a list of attached exhibits required by the Federal Communications Commission for the application to and grant of FCC Type Acceptance. All tests are per TIA-603-D (2010) where applicable.

TABLE OF CONTENT:

EXHIBIT	FCC PART(S)	PAGE
Test Equipment List	2.947 (d)	pg 2
Description of Measurement Facility	2.947 (d)	pg 3
Radio Frequency Power Output	2.1046 (a)	pg 4
Transmitter Audio Overall Response	2.1047 (a)	pg 5-6
Transmitter Audio Lowpass Filter	2.1047 (a)	pg 7-8
Modulation Limiting	2.1047 (b)	pg 9-10
Emissions Designator	2.1049 (c)(1)	pg 11
Occupied Bandwidth	2.1049 (c)(1), 90.210(d)	pg 12-13
Spurious Emissions at Antenna Terminals	2.1051	pg 14
Field Strength of Spurious Emissions	2.1053	pg 15-16
Frequency Stability vs. Temperature	2.1055 (a)(1)	pg 17-19
Frequency Stability vs. Voltage	2.1055 (d)(1)	pg 20
Transient Frequency Behavior	90.214	pg 21-24

TYPE OF EXHIBIT:	TEST EQUIPMENT LIST
FCC PART:	2.947 (d)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

TEST EQUIPMENT:

The measured data in this report was obtained using one or more of the following pieces of equipment. The particular equipment used in any one test is detailed in the procedure for that test.

ITEM	MANUFACTURER	MODEL NO.	SERIAL NO.	Last Cal	EXP Cal
Comms Test Set	Aeroflex	IFR COM-120B	485001757	6 DEC 2013	6 DEC 2014
Signal generator	Agilent	N5181A	MY46240065	04 NOV 2013	04 NOV 2016
Spectrum Analyzer	Advantest	R3265A	75060189	02 OCT 2013	02 OCT 2014
Log Periodic Antenna	Electro-Metrics	LPA-25	8-102	30 APR 2014	30 APR 2017
Dipole Antenna	Electro-Metrics	BDA-25	8-101	30 APR 2014	30 APR 2017
Dipole Antenna	Electro-Metrics	EM-6925	292	8 APR 2014	8 APR 2015
Dipole Antenna	Electro-Metrics	EM-6927	292	8 APR 2014	8 APR 2015
Gain horn	EMCO	3105	2034	22 OCT 2013	22 OCT 2015

SUPPORT EQUIPMENT:

ITEM	MANUFACTURER	MODEL NO.	SERIAL NO.		
Power Supply	BK Precision	1630	146-03508		
Digital Oscilloscope	Philips	PM-3335	DM648004		
Digital Multimeter	Fluke	179	82800086		
Temperature Chamber	Associated Laboratories	ELH-0.5-LC	N/A		
Thermocouple	Omega	7035-J-225	8504		
272 MHz high pass filter	Ritron				
30dB Power Attenuator	Bird	8306-300-N	N/A		
10dB Attenuator	ELCOM	AT-51-10	N/A		

SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	DESCRIPTION OF MEASUREMENT FACILITY
FCC PART:	2.947 (d)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

DESCRIPTION:

The emission measurements filed with this application were made on a site certified by RITRON, Inc. Data pertaining to this site is on file with the FCC and Industry Canada.

Firm Registration Number: 536261
Firm FRN: 0004-3348-76
FCC Reference: ANSI STD C63.4-2003
Industry Canada Radio Standard: Procedure 212

This site is used on a continuing basis exclusively by RITRON, Inc. and is utilized only for RF field strength measurements of equipment designed and manufactured by RITRON, Inc. It is not used for measurements by, or for, any other party on a contract basis or otherwise.

All other measurements are taken at RITRON's engineering laboratory in Carmel, IN.

PHOTO OF RITRON TEST SITE:



SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	RADIO FREQUENCY POWER OUTPUT
FCC PART:	2.1046 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PROCEDURE:

1. The JBS-446D was aligned for transmitter operation at 2.1W per the tune-up procedure using frequencies at the low, middle, and upper range of the desired operating band.
2. Power was supplied to the JBS-446D at J302 DC POWER input by a BK Precision 1630 power supply set to 12 volts, the specified input voltage.
3. The JBS-446D was connected to an IFR COM-120A Test Set used to measure the RF carrier power. The input to the Test Set provides a resistive 50-ohm termination at the frequencies and power levels used for this test.
4. A Fluke 179 multimeter was used to measure the I_{TX} transmitter current that supplies the final RF amplifier.
5. Measurements were taken at frequencies spanning the desired operating band of 450-470 MHz.
6. The JBS-446D was set for maximum transmit power and steps 2-5 were repeated.

RESULTS:

Frequency (MHz)	Input (VDC)	+V _{TX} (VDC)	2W Operation		Maximum Power	
			I _{TX} (mA)	Power (W)	I _{TX} (mA)	Power (W)
451.025	12	8.2	483	2.0	559	2.4
460.025	12	8.2	448	2.1	534	2.5
469.975	12	8.2	449	2.1	529	2.5

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	TRANSMITTER AUDIO OVERALL RESPONSE
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PROCEDURE:

1. The JBS-446D was set to transmit narrowband (12.5 kHz) at a frequency in the middle of the desired operating band, with the radio set for pre-emphasis and voice audio lowpass filter.
2. The output of an IFR COM-120B audio function generator was applied to the input of the JBS-446D audio processing circuitry at J303 at a constant input level of 65 mVP to prevent limiting at any frequency.
3. The audio input frequency was varied from 100-5000 Hz, and the resulting FM deviation was measured using an IFR COM-120B Test Set.
4. The transmitter audio frequency response was calculated as:

$$20 \log (\text{Deviation of test frequency} / \text{deviation of 1 kHz reference frequency})$$
5. Results were plotted on the attached chart.


RESULTS:

Frequency	Audio Response	
(Hz)	(dB)	(Hz)
100	-27.8	30
300	-11.8	190
400	-7.3	320
500	-5.6	390
600	-4.1	460
700	-2.9	530
800	-1.8	600
900	-1.0	660
1000	0.0	740
1500	3.6	1120
2000	6.0	1480
2500	7.9	1840
3000	8.5	1980
4000	-1.3	640
5000	-16.6	110

TYPE OF EXHIBIT:	TRANSMITTER AUDIO OVERALL RESPONSE
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PLOT:

JBS-446D TX Audio Overall Response

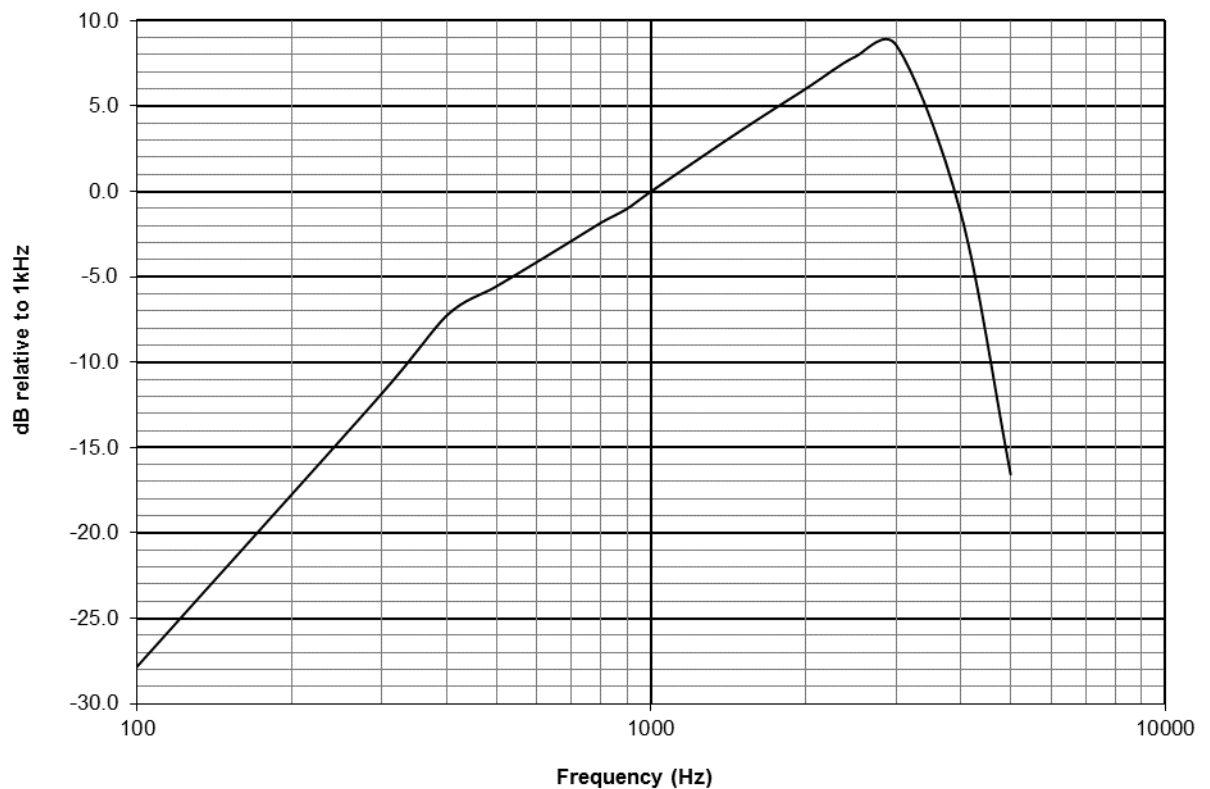

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	TRANSMITTER AUDIO LOWPASS FILTER
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PROCEDURE:

1. The JBS-446D was set to transmit narrowband (12.5 kHz) at a frequency in the middle of the desired operating band, with the radio set for no pre-emphasis.
2. The output of an IFR COM-120B audio function generator was applied to the input of the JBS-446D audio processing circuitry at J303 at a constant input level of 135 mVP to prevent limiting at any frequency.
3. The audio input frequency was varied from 300-5000 Hz, and the resulting FM deviation was measured using an IFR COM-120B Test Set.
4. The transmitter audio frequency response was calculated as:


$$20 \log (\text{Deviation of test frequency} / \text{deviation of 1 kHz reference frequency})$$
5. Results were plotted on the attached chart.

RESULTS:

Frequency	Audio Response	
(Hz)	(dB)	(Hz)
300	-3.0	1050
400	-0.4	1420
500	-0.1	1480
600	0.0	1490
700	0.0	1490
800	0.0	1490
900	0.0	1490
1000	0.0	1490
1500	0.3	1540
2000	0.3	1550
2500	0.3	1540
3000	-0.4	1430
4000	-11.9	380
5000	-27.9	60

TYPE OF EXHIBIT:	TRANSMITTER AUDIO LOWPASS FILTER
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PLOT:

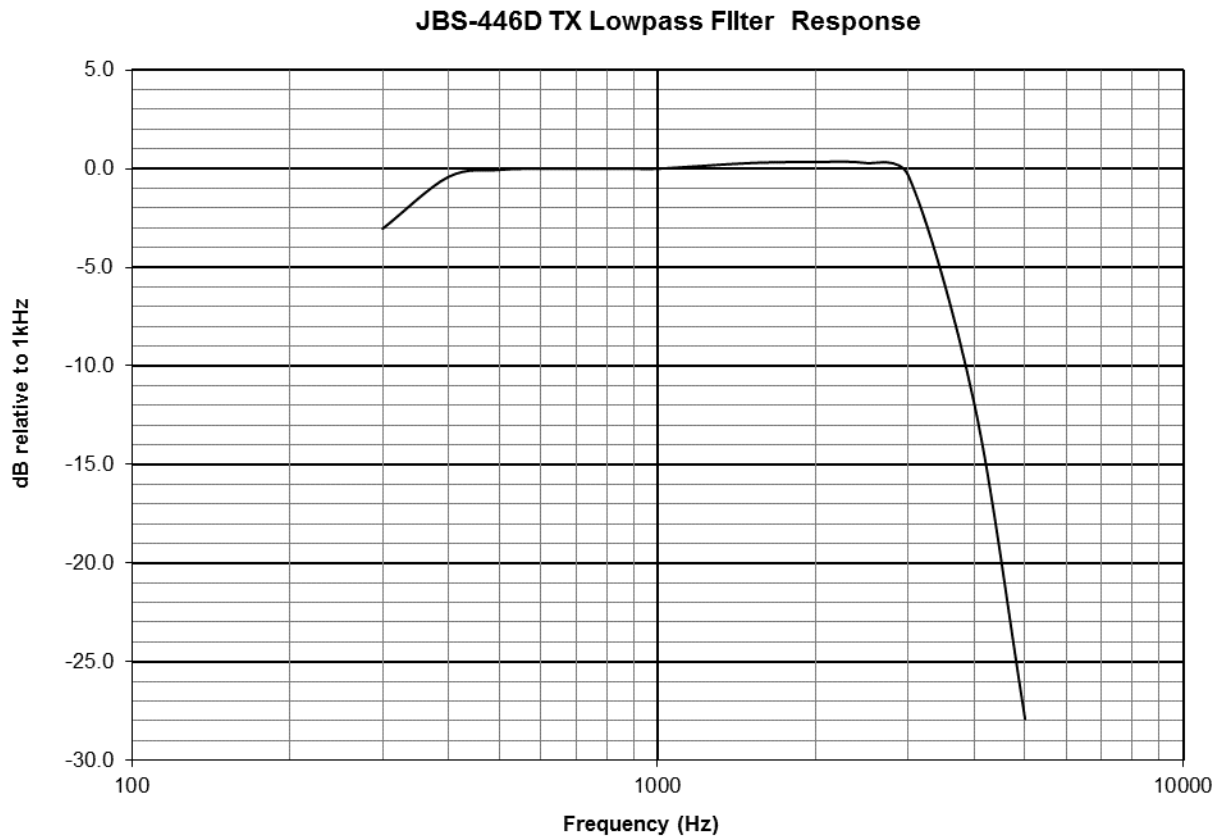

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	MODULATION LIMITING
FCC PART:	2.1047 (b)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

PROCEDURE:


1. The JBS-446D was adjusted for a narrowband 100% deviation of +/- 2.5 kHz per the tune-up procedure. The radio was programmed for transmitter operation at a frequency in the middle of the desired operating band.
2. The output of an IFR COM-120B audio function generator was applied to the input of the JBS-446D audio processing circuitry at J303.
3. The output of the generator was adjusted from 1 mVP to 2500 mVP at frequencies from 500 to 3000 Hz. This satisfies required deviation for 60% modulation +/- 20dB at all frequencies.
4. An IFR COM-120B was used to measure FM deviation. The resulting deviations were recorded as a percentage of the rated system deviation of +/- 2.5 kHz for narrowband operation.
5. Steps 2 – 4 were repeated at frequencies representing the lower and upper range of the desired operation band.
6. The attached chart displays the narrowband (12.5 kHz) response.

RESULTS:

	Input Signal (mVP)			
% Deviation	500 Hz	1000 Hz	2000 Hz	3000 Hz
10%	42	22	11	8
20%	87	46	22	16
30%	131	68	34	24
40%	176	91	45	33
50%	212	115	57	41
60%	229	138	69	49
70%	255	162	81	58
80%	340	192	93	70
90%		250	124	109
100%		350	300	180

TYPE OF EXHIBIT:	MODULATION LIMITING
FCC PART:	2.1047 (b)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

PLOT:

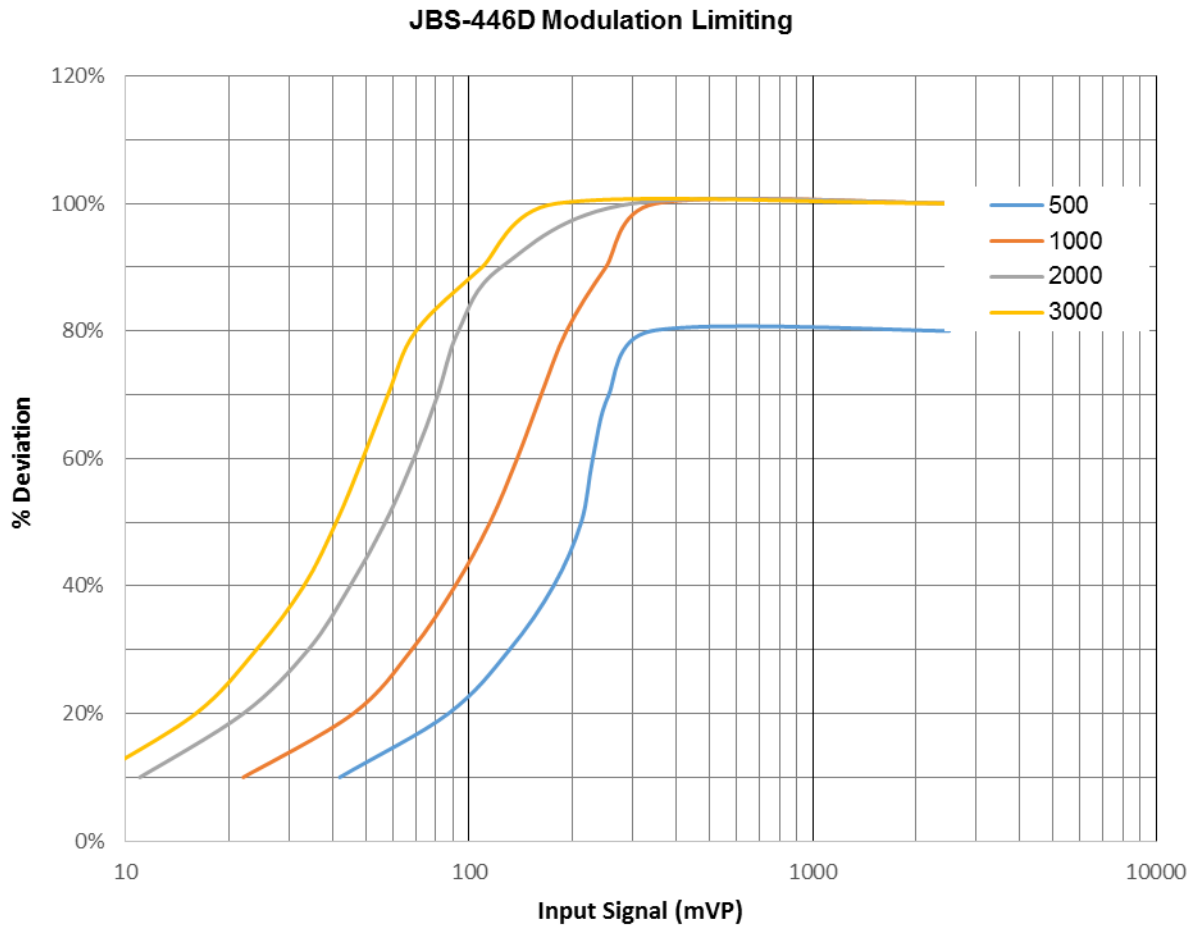

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	EMISSIONS DESIGNATOR
FCC PART:	2.1049 (c)(1)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

CALCULATIONS:

By Carson's rule, the occupied bandwidth for an FM signal may be calculated by:

$BW = 2(f_{\Delta} + f_m)$ where f_{Δ} is the frequency deviation and f_m is the modulating frequency.

The necessary bandwidth for the narrowband voice channel is:


Maximum modulation frequency (f_m) in kHz = 3

Maximum deviation (f_{Δ}) in kHz = 2.5

Necessary bandwidth for **narrowband** in kHz = $2(2.5 + 3) = 11$

Narrowband emissions designator applied for is 11K0F3E.

SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	OCCUPIED BANDWIDTH
FCC PART:	2.1049 (c)(1) per 90.210 (d)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014


PROCEDURE:

1. The JBS-446D was programmed for transmitter operation at a frequency in the middle of the desired operating band. The transmitter was adjusted for a deviation of +/- 2.5 kHz at 1900 Hz for narrowband operation. The photo shows voice occupied bandwidth for 12.5 kHz bandwidth operation with a 2500 Hz audio tone.
2. The RF output of the JBS-446D was measured with an IFR COM-120B wattmeter at 2.5W. Power was supplied to the JBS-446D at J302 DC POWER input by a BK Precision 1630 power supply set to 12 volts.
3. The unit's antenna port was connected to the Advantest R3265A spectrum analyzer through a Bird 8306-300-N 30dB attenuator. The spectrum analyzer reference level was set to the measured level of the unmodulated carrier after attenuation.
4. The output of an IFR COM-120B audio function generator was applied to the input of the JBS-446D audio processing circuitry at J303. The frequency of the audio signal generator was set to 2500 Hz and the output adjusted to a level 16 dB greater than that necessary to produce 50% of the rated system deviation at the frequency of maximum response.
5. The spectrum analyzer was centered on 460.025 MHz and the sidebands were capture in max hold mode on the spectrum analyzer. The appropriate narrow band emission mask was also displayed.
Frequency of maximum response: 3000 Hz
Level for 50% system deviation: 40 mVP
Level for 50% system deviation + 16DB: 252 mVP
6. Steps 2 - 5 were repeated at frequencies representing the lower and upper range of the desired operating band.
7. The captured spectrum analyzer display is included in this exhibit, representing the response with the highest sidebands.

TYPE OF EXHIBIT:	OCCUPIED BANDWIDTH
FCC PART:	2.1049 (c)(1) per 90.210 (d)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

ANALYZER DISPLAY:

12.5 kHz channel with 2500 Hz tone

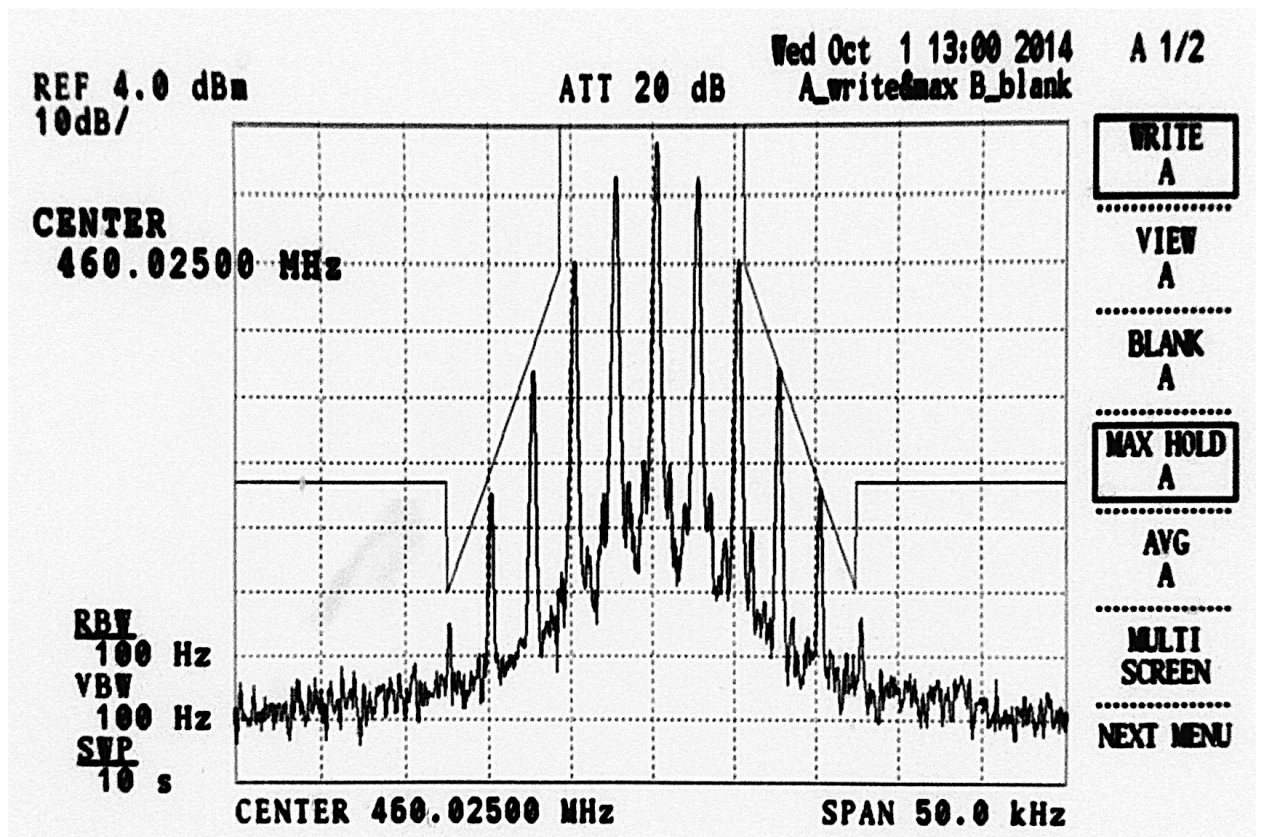

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
FCC PART:	2.1051
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PROCEDURE:

1. The JBS-446D was programmed for transmitter operation on frequencies at the low, middle, and upper range of the desired operating band.
2. Power was supplied to the JBS-446D at J302 DC POWER input by a BK Precision 1630 power supply set to 12 volts.
3. The transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation as specified in FCC Part 2.1049 (c)(1).
4. The JBS-446D antenna port was connected to the Advantest R3265A spectrum analyzer through a Bird 8306-300-N 30dB attenuator.
5. The spectrum was searched from 8 MHz to the 10th harmonic of the operating frequency. All unreported emissions are more than 20 dB below the FCC limit.

RESULTS:

Maximum Output Power: 2.5W
FCC Attenuation per Part 90.210(d)(3): 53.98 dBc

Multiple of Carrier	Emission Frequency (MHz)	Analyzer Reading (dBm)	Attenuation Correction Factor (dB)	Spurious Power (dBm)	Spurious Power (dBc)	FCC Limit (dBc)	FCC Margin (dB)
Carrier 3	451.025 1353.075	-68.31	30	-38.31	-72.29	-53.98	18.31
Carrier 3	460.025 1380.075	-64.44	30	-34.44	-68.48	-53.98	14.44
Carrier 3	469.975 1409.925	-68.53	30	-38.53	-72.51	-53.98	18.53

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer (dB)

TYPE OF EXHIBIT:	FIELD STRENGTH OF SPURIOUS EMISSIONS
FCC PART:	2.1053
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

PROCEDURE:

1. Field strength of spurious radiation of the JBS-446D was taken at the RITRON, Inc. 3-meter test site, details of which are on file with the FCC. The measurement was via the substitution method.
2. The JBS-446D was aligned for transmitter operation on 3 frequencies represent the low, middle, and upper range of the desired operating band at the rated 2.5 W transmitter output power. The radio was powered by a Ritron model RPS-1B, the 12 VDC power cube included with each radio.
3. The JBS-446D was terminated at the antenna port with a non-radiating 50 Ω load.
4. All field strength measurements were made with the Advantest R3265A Spectrum Analyzer connected to the Electro-Metrics BDA-25 dipole, Electro-Metrics LPA-25 log periodic or EMCO horn receiving antenna. All harmonic measurements were made through a 900 MHz high pass filter.
5. A calibrated ½-wave dipole antenna was substituted at the radio side of the range driven by a known power level from an Agilent N5181A RF signal generator to produce a known ERP at each harmonic. The receiving antenna was oriented both vertically and horizontally and reference measurements were taken at each harmonic. All harmonic measurements were made through a 900 MHz high pass filter. Cable loss from generator to the dipole was taken into account.
6. For each emission, the height and polarization of the field strength measuring antenna and orientation of the JBS-446D was varied to find maximum field strength.
7. The spectrum was searched up to the 10th harmonic of the transmit frequency. All non-harmonics were less than 20 dB below the FCC limits specified in Part 90.210(d)(3). All harmonics with greater than 20 dB margin were not reported.

TYPE OF EXHIBIT:	FIELD STRENGTH OF SPURIOUS EMISSIONS
FCC PART:	2.1053
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

RESULTS:

Power Output: 2.5 W

FCC Attenuation per Part 90.210(d)(3): 53.98 dBc

JBS-446D				Horizontal			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
	451.025	16.6	-1.59	-24.13	-3.69		
	163.250	16.3	-2.00	-24.69	-2.34		
	173.390	16.0	-1.78	--24.19	3.19		

JBS-446D				Vertical			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
	451.025	16.6	-1.59	-25.41	5.56		
	163.250	16.3	-2.00	-25.78	4.72		
	173.390	16.0	-1.78	-25.88	4.53		

SIGNED: 
Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. TEMPERATURE
FCC PART:	2.1055 (a)(1)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 6, 2014

PROCEDURE:

1. The JBS-446D uses two different reference oscillators to determine transmit frequency. A 26.0 MHz reference oscillator is used for transmit frequencies 464.400 MHz and below, and a 25.6 MHz oscillator is used for frequencies above 464.400 MHz.
2. The JBS-446D was programmed for operation at a frequency using the 25.6 MHz reference oscillator.
3. The unit was placed inside a Delta Design Model 3900 CL temperature chamber and power was supplied to the JBS-446D at J302 DC POWER input by a BK Precision 1630 power supply set to 12 volts. The antenna terminal was connected to the input of an IFR COM-120B RF communications test set used to measure frequency of the carrier. A Triplet model 320-G/P thermocouple was placed inside the chamber to measure temperature.
4. Frequency was measured at +25°C and recorded as a reference frequency.
5. The temperature was raised to +30°C for 30 minutes, at which time the transmitter frequency was measured and recorded.
6. Step 4 was repeated in +10°C increments up to +60°C.
7. The unit was allowed to return naturally back to the ambient room temperature of +25°C.
8. The temperature was lowered to +20°C for 30 minutes, at which time the transmitter frequency was measured and recorded.
9. Step 8 was repeated in -10°C increments down to -30°C.
10. The JBS-446D was programmed for operation at a frequency using the 26.0 MHz reference oscillator. Steps 3-9 were repeated.
11. The frequency remained within the 1.5 ppm specified across the full -30°C to +60°C temperature range.

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. TEMPERATURE
FCC PART:	2.1055 (a)(1)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 6, 2014

RESULTS:

25.6 MHz reference oscillator		
Temp °C	Frequency (MHz)	Error (ppm)
-30	469.975313	0.67
-20	469.975190	0.40
-10	469.974923	-0.16
0	469.974735	-0.56
10	469.974688	-0.66
20	469.974889	-0.24
30	469.975030	0.06
40	469.974985	-0.03
50	469.974819	-0.39
60	469.974745	-0.54
25	469.975000	0.00

26 MHz reference oscillator		
Temp C	Frequency (MHz)	Error (ppm)
-30	460.025467	1.02
-20	460.025475	1.03
-10	460.025441	0.96
0	460.025327	0.71
10	460.025233	0.51
20	460.025137	0.30
30	460.025002	0.00
40	460.025162	0.35
50	460.025172	0.37
60	460.025112	0.24
25	460.025000	0.00


SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. TEMPERATURE
FCC PART:	2.1055 (a)(1)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 6, 2014

PLOT:

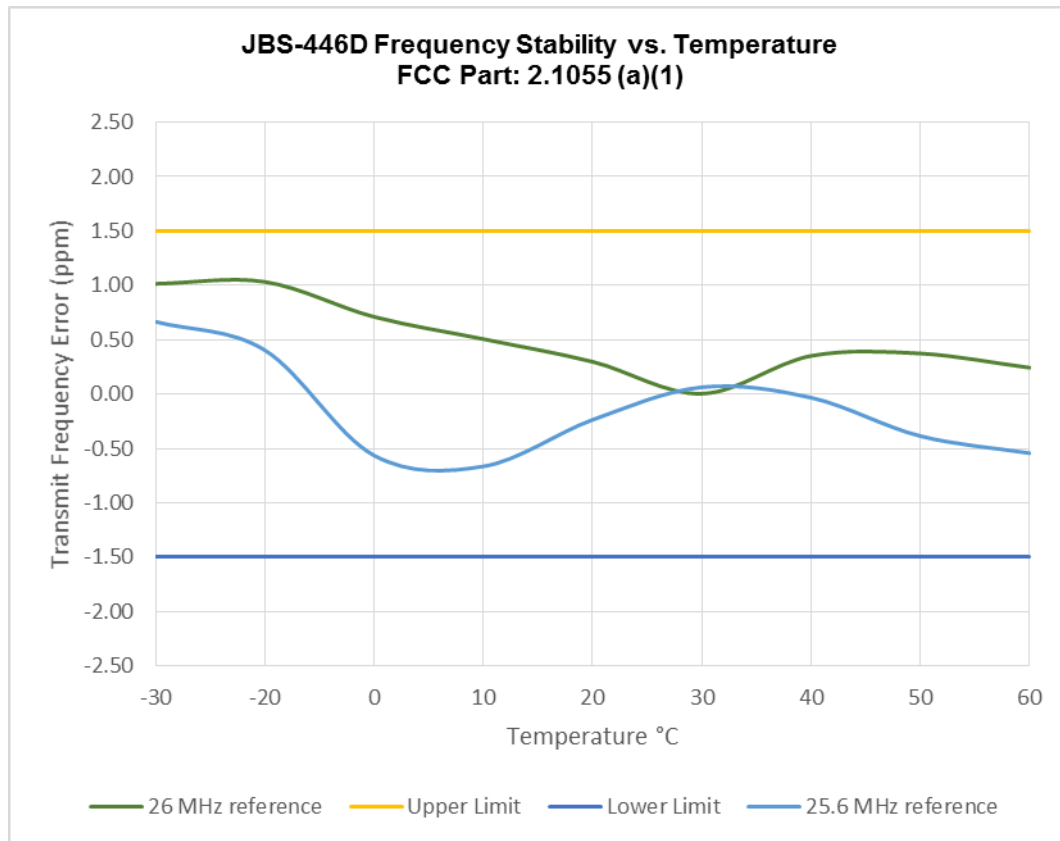

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. VOLTAGE
FCC PART:	2.1055 (d)(1)
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 1, 2014

PROCEDURE:

1. The JBS-446D uses two different reference oscillators to determine transmit frequency. A 26.0 MHz reference oscillator is used for transmit frequencies 464.400 MHz and below, and a 25.6 MHz oscillator is used for frequencies above 464.400 MHz.
2. The JBS-446D was programmed for operation at a frequency using the 25.6 MHz reference oscillator.
3. The JBS-446D antenna terminal was connected to the input of an IFR COM-120B communications test set, used to measure frequency of the carrier.
4. A BK Precision Model 1630 power supply was used to apply supply voltage at the battery input.
5. The radio was put into transmit mode and the measured frequency at 12 VDC was used as a reference.
6. Frequency was checked from 85% to 115% of specified operating voltage.
Minimum of $12 \times 0.85 = 10.2 \text{ V}$
Maximum of $12 \times 1.15 = 13.8 \text{ V}$
7. The JBS-446D was programmed for operation at a frequency using the 26.0 MHz reference oscillator. Steps 2-6 were repeated.

RESULTS:

VDC	Condition	25.6 MHz oscillator		26 MHz oscillator	
		Frequency (MHz)	Error (ppm)	Frequency (MHz)	Error (ppm)
10.2	External Power @ 85%	469.974960	-0.08	451.025051	0.11
12.0	External Power Nominal	469.974960	-0.08	451.025051	0.11
13.8	External Power @ 115%	469.974960	-0.08	451.025051	0.11

SIGNED: Michael A. Pickard
Michael A. Pickard - Project Engineer


TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

PROCEDURE:

1. The JBS-446D was aligned for transmitter operation at 2.5W power level per the tune-up procedure for frequencies representing the low, middle, and upper range of the desired operating band.
2. Power was supplied to the JBS-446D at the DC POWER input by a BK Precision 1630 power supply set to 12 VDC.
3. The test equipment was connected per the TEST SETUP diagram.
4. The IFR COM-120B receiver was set to measure FM deviation with the audio bandwidth set at ≤ 20 Hz to 15 kHz at an RF frequency in the middle of the desired operating band.
5. The JBS-446D transmitter under test was turned on and the IFR COM-120B Spectrum Analyzer was used to measure the RF power level through the test network.
6. The JBS-446D transmitter was turned off.
7. The IFR COM-120B RF signal generator was set to the transmit frequency at an RF level 30 dB below that measured in step 5, modulated with a 1 kHz tone at ± 12.5 kHz deviation.
8. The Phillips PM-3335 digital oscilloscope horizontal sweep rate was set to 10 mS per division. The vertical amplitude control was adjusted to display the 1000 Hz demodulated audio from the signal generator at ± 4 divisions (3.125 kHz/div), vertically centered on the screen.
9. The Phillips PM-3335 digital oscilloscope was set to trigger at 1 division from the left side of the display when the RF detector senses RF power from the JBS-446D transmitter.
10. The JBS-446D transmitter is turned on and the resulting waveform on the oscilloscope display was stored and plotted. The FCC limits per Part 90.214 were added to the plot in the same manner illustrated in EIA-603-B Part 2.2.19.3. The resulting plot is labeled "Switch ON" and shows compliance with FCC Part 90.214.
11. The Phillips PM-3335 digital oscilloscope was set to trigger at 1 division from the right side of the display when the RF detector senses loss of RF power from the JBS-446D transmitter.
12. The JBS-446D transmitter is turned off and the resulting waveform on the oscilloscope display was stored and plotted. The FCC limits per Part 90.214 were added to the plot in the same manner illustrated in EIA-603-B Part 2.2.19.3. The resulting plot is labeled "Switch OFF" and shows compliance with FCC Part 90.214.
13. The test procedure was repeated for frequencies at the lower and upper range of the desired operating band. The worst case response occurred in the middle of the specified operating band, with the resulting display included in this exhibit.


TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

TEST SETUP:

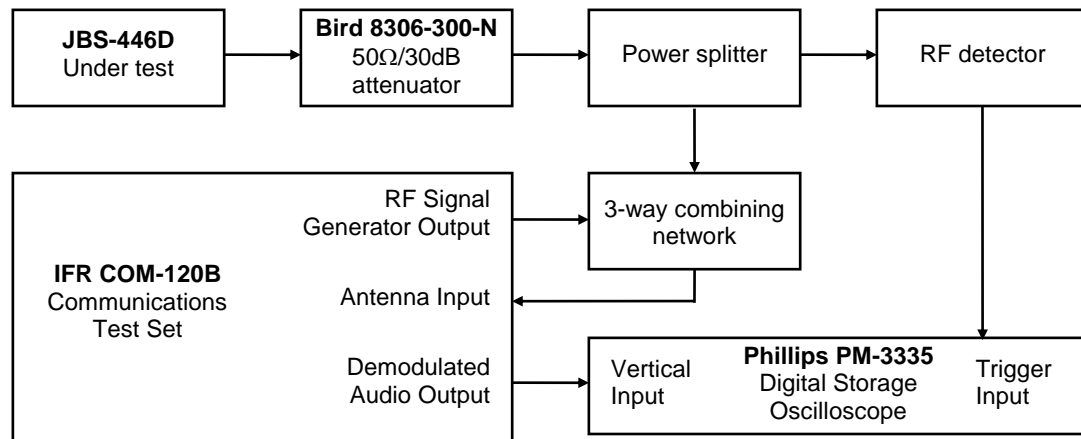

TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

SWITCH ON CONDITION

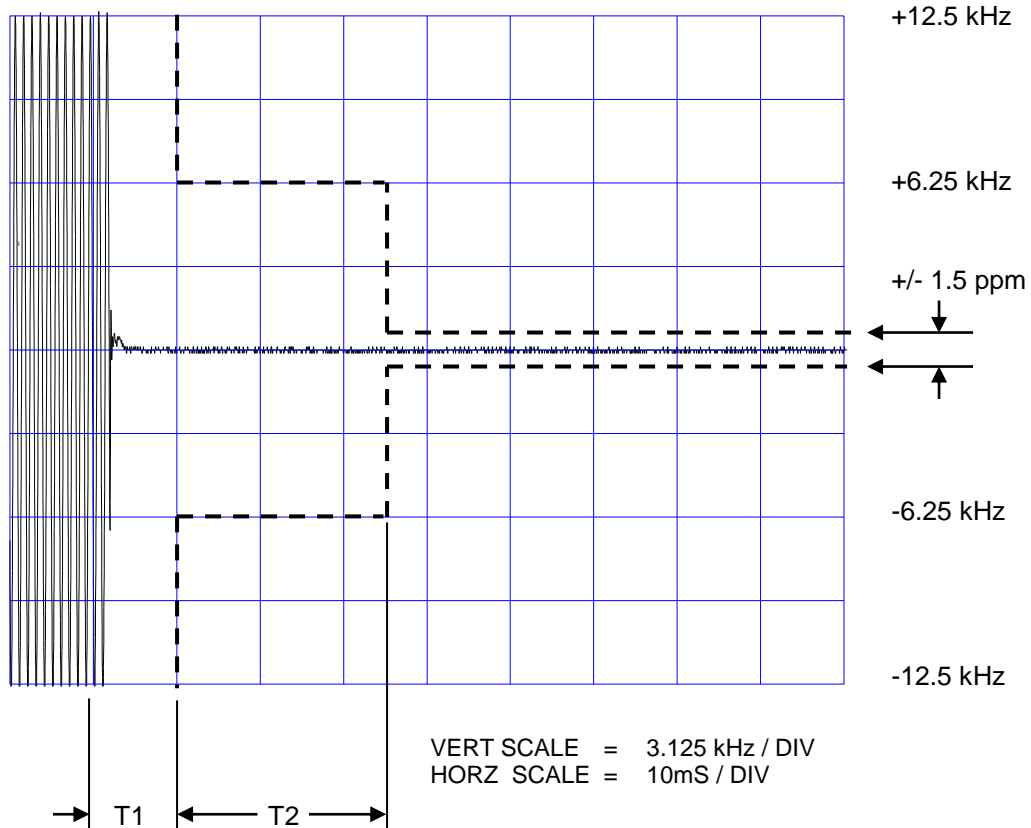


SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	JBS-446D
TYPE OF UNIT:	UHF-FM 2-Way Desk Top Radio
FCC ID:	AIERIT37-446D
DATE:	October 2, 2014

SWITCH OFF CONDITION

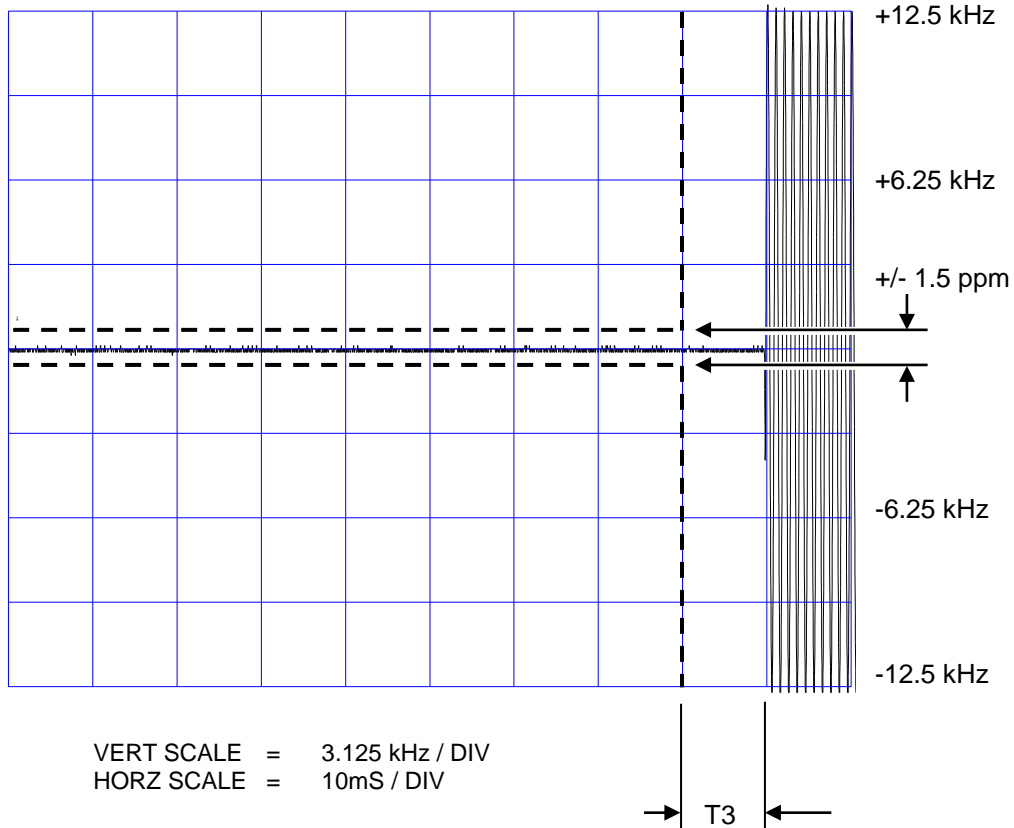

SIGNED: Michael A. Pickard
Michael A. Pickard - Project Engineer