

TYPE OF EXHIBIT:	TEST REPORT
FCC PART:	2.1033 (c)(14)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

The following is a list of attached exhibits required by the Federal Communications Commission for the application to and grant of FCC Type Acceptance. All tests are per TIA-603-D (2010) where applicable.

TABLE OF CONTENT:

EXHIBIT	FCC PART(S)	PAGE
Test Equipment List	2.947 (d)	pg 2
Description of Measurement Facility	2.948	pg 3
Radio Frequency Power Output	2.1046 (a), 95.639 (h)	pg 4-5
Transmitter Audio Overall Response	2.1047 (a)	pg 6-7
Transmitter Audio Lowpass Filter	2.1047 (a)	pg 8-9
Modulation Limiting	2.1047 (b)	pg 10-12
Emissions Designator	2.1049 (c)(1), 95.631 (j)	pg 13
Occupied Bandwidth	2.1049 (c)(1), 95.635 (e)(1)(2)	pg 14-16
Spurious Emissions at Antenna Terminals	2.1051	pg 17-18
Field Strength of Spurious Emissions	2.1053	pg 19-22
Frequency Stability vs. Temperature	2.1055 (a)(1), 95.632 (c)	pg 23-25
Frequency Stability vs. Voltage	2.1055 (d)(1), 95.632 (c)	pg 26
Transient Frequency Behavior	90.214	pg 27-30

TYPE OF EXHIBIT:	TEST EQUIPMENT LIST
FCC PART:	2.947 (d)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

TEST EQUIPMENT:


The measured data in this report was obtained using one or more of the following pieces of equipment. The particular equipment used in any one test is detailed in the procedure for that test.

ITEM	MANUFACTURER	MODEL NO.	SERIAL NO.	Last Cal	EXP Cal
Comms Test Set	Aeroflex	IFR COM-120B	485001757	6 DEC 2013	6 DEC 2014
Signal generator	Agilent	N5181A	MY46240065	04 NOV 2013	04 NOV 2016
Spectrum Analyzer	Advantest	R3265A	75060189	02 OCT 2013	02 OCT 2014
Log Periodic Antenna	Electro-Metrics	LPA-25	8-102	30 APR 2014	30 APR 2017
Dipole Antenna	Electro-Metrics	BDA-25	8-101	30 APR 2014	30 APR 2017
Dipole Antenna	Electro-Metrics	EM-6925	292	8 APR 2014	8 APR 2015
Dipole Antenna	Electro-Metrics	EM-6927	292	8 APR 2014	8 APR 2015
Gain horn	EMCO	3105	2034	22 OCT 2013	22 OCT 2015

SUPPORT EQUIPMENT:

ITEM	MANUFACTURER	MODEL NO.	SERIAL NO.		
Power Supply	BK Precision	1630	146-03508		
Digital Oscilloscope	Philips	PM-3335	DM648004		
Digital Multimeter	Fluke	179	82800086		
Temperature Chamber	Associated Laboratories	ELH-0.5-LC	N/A		
Thermocouple	Omega	7035-J-225	8504		
272 MHz high pass filter	Ritron				
30dB Power Attenuator	Bird	8306-300-N	N/A		
10dB Attenuator	ELCOM	AT-51-10	N/A		

SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	DESCRIPTION OF MEASUREMENT FACILITY
FCC PART:	2.948
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

DESCRIPTION:

The emission measurements filed with this application were made on a site certified by RITRON, Inc. Data pertaining to this site is on file with the FCC and Industry Canada.

Firm Registration Number: 536261
Firm FRN: 0004-3348-76
FCC Reference: ANSI STD C63.4-2003
Industry Canada Radio Standard: Procedure 212

This site is used on a continuing basis exclusively by RITRON, Inc. and is utilized only for RF field strength measurements of equipment designed and manufactured by RITRON, Inc. It is not used for measurements by, or for, any other party on a contract basis or otherwise.

All other measurements are taken at RITRON's engineering laboratory in Carmel, IN.

PHOTO OF RITRON TEST SITE:



SIGNED: Michael A. Pickard
Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	RADIO FREQUENCY POWER OUTPUT
FCC PART:	2.1046 (a), 95.639 (h)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. Power was supplied to the RQX-156M at P603 Battery Connector by a BK Precision 1630 power supply.
2. The RQX-156M was aligned for transmitter operation on 2 frequencies representing the lower and upper range of the desired operating band for each of the three configurations listed below.
 - RQX-156M model installed in the basic enclosure, powered by 3 D-cell batteries for 900mW TX power, operating with the internal antenna mounted on the PCB.
 - RQX-156M model installed in the basic enclosure, powered by 6 AA-cell batteries, limited to 2W TX power, operating with the internal antenna mounted on the PCB.
 - RQX-156M-XT model installed in an XT enclosure, powered by 6 D-cell batteries, limited to 2W TX power, terminated at the antenna port with the Ritron AFB-1545 antenna include with the product. (The user can connect other antennas, however.)
3. The RQX-156M was tested in each of the three configurations.
4. The RQX-156M J201 SMB antenna connector was connected to an IFR COM-120A Test Set used to measure the RF carrier power. The input to the Test Set provides a resistive 50-ohm termination at the frequencies and power levels used for this test. The internal antenna mounted on the PCB was disconnected.
5. A Fluke 179 multimeter was used to measure the I_{TX} transmitter current that supplies the final RF amplifier.
6. Measurements were taken using frequencies at the lower and upper range of the desired operating band at supply voltages representing fully charged batteries (number of cells x 1.5V) and EOL batteries (number of cells x 1.1V)
7. Power was supplied to the RQX-156M-XT at P601 External Power Input by a BK Precision 1630 power supply set to 12 volts, the rated external input voltage.
8. Steps 3-5 were repeated.

TYPE OF EXHIBIT:	RADIO FREQUENCY POWER OUTPUT
FCC PART:	2.1046 (a), 95.639 (h)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS:

			900mW output with 3 D-cell batteries		2W output with 6 AA-cell batteries		2W output with 6 D-cell batteries	
Frequency (MHz)	Input (VDC)	+V _{TX} (VDC)	I _{TX} (mA)	Power (W)	I _{TX} (mA)	Power (W)	I _{TX} (mA)	Power (W)
151.820	3.3	3.15	537	0.80	-	-	-	-
	4.5	4.3	466	0.90	-	-	-	-
	6.6	6.4	-	-	640	1.82	640	1.82
	9	8.8	-	-	639	2.00	639	2.00
	12	8.4	-	-	-	-	638	2.00
154.600	3.3	3.15	551	0.86	-	-	-	-
	4.5	4.3	484	0.90	-	-	-	-
	6.6	6.4	-	-	656	1.76	656	1.76
	9	8.8	-	-	655	2.00	655	2.00
	12	8.4	-	-	-	-	655	2.00

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	TRANSMITTER AUDIO OVERALL RESPONSE
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. The RQX-156M was set to transmit narrowband (12.5 kHz) at a frequency in the middle of the desired operating band, with the radio set for pre-emphasis and voice audio lowpass filter.
2. The output of an IFR COM-120B audio function generator was applied to the MIC_AUD input of the RQX-156M at a constant input level of 100 mVP to prevent limiting at any frequency.
3. The audio input frequency was varied from 100-5000 Hz, and the resulting FM deviation was measured using an IFR COM-120B Test Set.
4. The transmitter audio frequency response was calculated as:

$$20 \log (\text{Deviation of test frequency} / \text{deviation of 1 kHz reference frequency})$$
5. Results were plotted on the attached chart.


RESULTS:

Frequency	Audio Response	
(Hz)	(dB)	Deviation (Hz)
100	-21.8	80
300	-8.7	360
400	-7.0	440
500	-5.0	550
600	-3.7	640
700	-2.7	720
800	-1.8	800
900	-0.7	900
1000	0.0	980
1500	3.3	1440
2000	5.8	1920
2500	6.9	2170
3000	6.5	2070
4000	-3.6	650
5000	-16.3	150

TYPE OF EXHIBIT:	TRANSMITTER AUDIO OVERALL RESPONSE
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PLOT:

RQX-156M TX Audio Overall Response

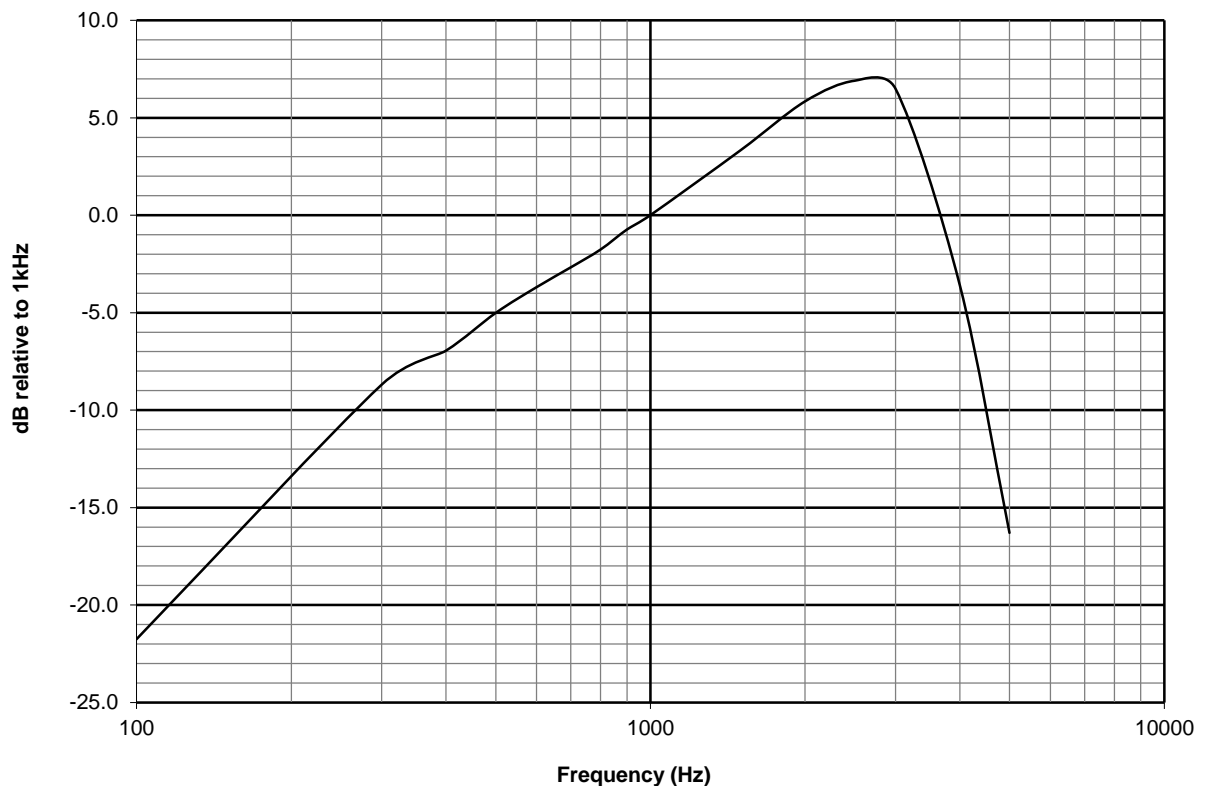

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	TRANSMITTER AUDIO LOWPASS FILTER
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. The RQX-156M was set to transmit narrowband (12.5 kHz) at a frequency in the middle of the desired operating band, with the radio set for no pre-emphasis.
2. The output of an IFR COM-120B audio function generator was applied to the MIC_AUD input of the RQX-156M at a constant input level of 200 mVP to prevent limiting at any frequency.
3. The audio input frequency was varied from 300-5000 Hz, and the resulting FM deviation was measured using an IFR COM-120B Test Set.
4. The transmitter audio frequency response was calculated as:


$$20 \log (\text{Deviation of test frequency} / \text{deviation of 1 kHz reference frequency})$$
5. Results were plotted on the attached chart.

RESULTS:

Frequency	Audio Response	
(Hz)	(dB)	Deviation (Hz)
300	-0.4	930
400	-0.1	960
500	0.1	980
600	0.1	980
700	0.0	970
800	0.0	970
900	0.0	970
1000	0.0	970
1500	0.2	990
2000	0.2	990
2500	0.1	980
3000	-0.7	890
4000	-11.4	260
5000	-19.7	100

TYPE OF EXHIBIT:	TRANSMITTER AUDIO LOWPASS FILTER
FCC PART:	2.1047 (a)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PLOT:

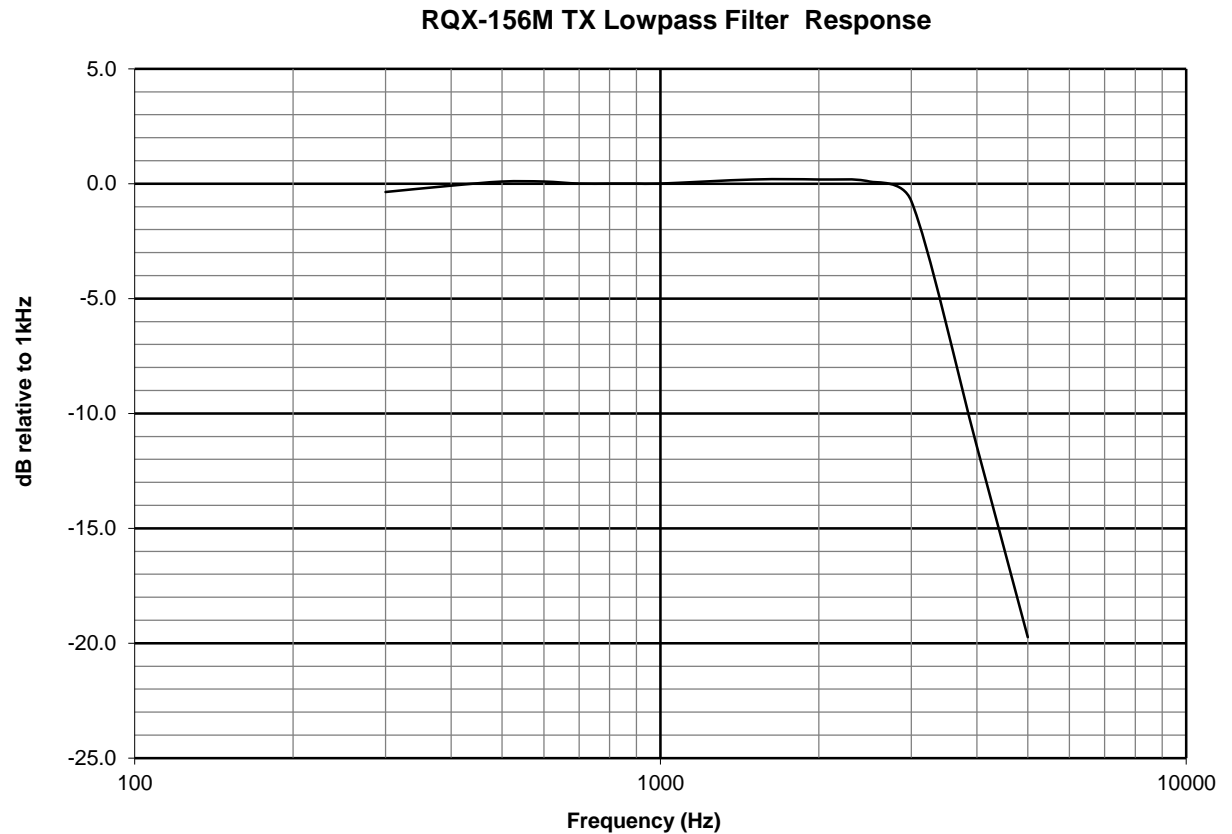

SIGNED:

Michael A. Pickard


Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	MODULATION LIMITING
FCC PART:	2.1047 (b)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. The RQX-156M was adjusted for a narrowband 100% deviation of +/- 2.5 kHz per the tune-up procedure. The radio was programmed for transmitter operation at 151.820 MHz, a narrowband frequency representing the lower end of the desired operating band.
2. The output of an IFR COM-120B audio generator was applied to the MIC_AUD input of the RQX-156M.
3. The output of the generator was adjusted from 15 mVP to 1500 mVP at frequencies from 500 to 3000 Hz. 1500 mVP is the maximum possible input voltage.
4. An IFR COM-120B was used to measure FM deviation. The resulting deviations were recorded as a percentage of the rated system deviation of +/- 2.5 kHz for narrowband operation.
5. An attached chart displays the narrowband (12.5 kHz) response.
6. The RQX-156M was adjusted for a wide band 100% deviation of +/- 5 kHz per the tune-up procedure. The radio was programmed for transmitter operation at 154.600 MHz, a wide band frequency representing the upper end of the desired operating band.
7. An IFR COM-120B was used to measure FM deviation. The resulting deviations were recorded as a percentage of the rated system deviation of +/- 5 kHz for wide band operation.
8. An attached chart displays the wide band (25 kHz) response.


SIGNED:


Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	MODULATION LIMITING
FCC PART:	2.1047 (b)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS FOR 12.5 kHz NARROWBAND


Deviation (Hz)	Deviation (%)	1000 Hz (mVP)	2000 Hz (mVP)	3000 Hz (mVP)	500 Hz (mVP)
250	10%	40	20	15	75
500	20%	85	43	31	164
750	30%	130	65	48	250
1000	40%	175	88	65	320
1250	50%	218	110	82	470
1500	60%	250	133	99	690
1750	70%	290	155	116	1080
1750	70%				1500
2000	80%	350	179	134	
2250	90%	470	202	152	
2320	93%	550			
2320	93%	1500			
2500	100%		250	200	
2500	100%		1500	1500	

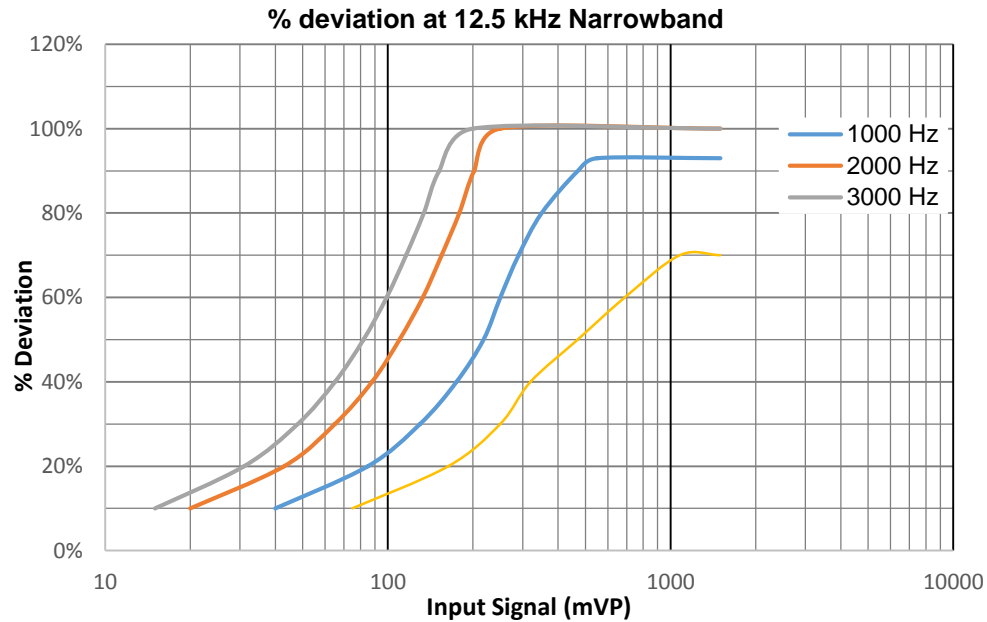

TYPE OF EXHIBIT:	MODULATION LIMITING
FCC PART:	2.1047 (b)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS FOR 25 kHz WIDE BAND

Deviation (Hz)	Deviation (%)	1000 Hz (mVP)	2000 Hz (mVP)	3000 Hz (mVP)	500 Hz (mVP)
500	10%	47	23	17	90
1000	20%	96	49	35	186
1500	30%	145	74	54	270
2000	40%	195	99	73	390
2500	50%	238	125	92	600
3000	60%	275	150	109	1010
3130	63%				1200
3130	63%				1500
3500	70%	340	176	126	
4000	80%	470	201	141	
4120	82%	550			
4120	82%	1500			
4500	90%		248	159	
4500	90%		1500		
5000	100%			210	
5000	100%			1500	

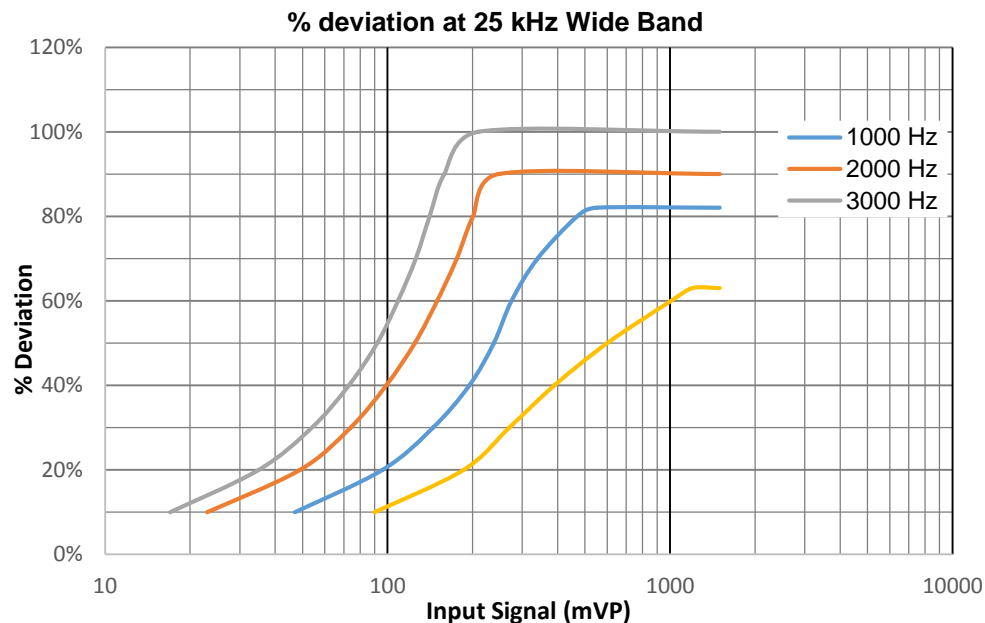

TYPE OF EXHIBIT:	EMISSIONS DESIGNATOR
FCC PART:	2.1049 (c)(1), 95.631 (j)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

CALCULATIONS:

By Carson's rule, the occupied bandwidth for an FM signal may be calculated by:

$BW = 2(f_{\Delta} + f_m)$ where f_{Δ} is the frequency deviation and f_m is the modulating frequency.

The necessary bandwidth for the narrowband voice channel is:

Maximum modulation frequency (f_m) in kHz = 3
Maximum deviation (f_{Δ}) in kHz = 2.5
Necessary bandwidth for **narrowband** in kHz = $2(2.5 + 3) = 11$


Narrowband emissions designator applied for is 11K0F3E.

The necessary bandwidth for the wide band voice channel is:

Maximum modulation frequency (f_m) in kHz = 3
Maximum deviation (f_{Δ}) in kHz = 5
Necessary bandwidth for **wide band** in kHz = $2(5 + 3) = 16$

Wide band emissions designator applied for is 16K0F3E.

SIGNED:




Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	OCCUPIED BANDWIDTH
FCC PART:	2.1049 (c)(1) per 95.635 (e)(1)(2)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:


1. The RQX-156M was set for 900mW transmitter operation at 151.820 MHz, a narrowband frequency representing the lower end of the desired operating band. The transmitter was adjusted for a deviation of +/- 2.5 kHz at 1000 Hz for narrowband operation.
2. Power was supplied to the RQX-156M at P603 Battery Connector by a BK Precision 1630 power supply set to 4.5 volts, an input voltage representing 3 fully charged D-cell batteries. The RF output of the RQX-156M was measured with an IFR COM-120B wattmeter at 900mW.
3. The unit's antenna port was connected to the Advantest R3265A spectrum analyzer through a Bird 8306-300-N 30dB attenuator. The spectrum analyzer reference level was set to the measured level of the unmodulated carrier after attenuation.
4. The output of an IFR COM-120B audio generator was applied to the MIC_AUD input of the RQX-156M. The frequency of the audio signal generator was set to 2500 Hz and the output adjusted to a level 16 dB greater than that necessary to produce 50% of the rated system deviation at the frequency of maximum response.
Frequency of maximum response: 2600 Hz
Level for 50% system deviation: 100 mVP
Level for 50% system deviation + 16DB: 631 mVP
5. The spectrum analyzer was centered on 151.820 MHz and the sidebands were capture in max hold mode on the spectrum analyzer. The appropriate narrow band emission mask was also displayed. The captured spectrum analyzer display is included in this exhibit.
6. The RQX-156M was set for 2W transmitter operation. Power was supplied to the RQX-156M at P603 Battery Connector by a BK Precision 1630 power supply set to 9.0 volts, an input voltage representing 6 fully charged AA-cell batteries. The RF output of the RQX-156M was measured with an IFR COM-120B wattmeter at 2W.
7. Steps 3-5 were repeated with the captured spectrum analyzer display included in this exhibit.
8. The RQX-156M was set for 900mW transmitter operation at 154.600 MHz, a wide band frequency representing the upper end of the desired operating band. The transmitter was adjusted for a deviation of +/- 5 kHz at 1000 Hz for wide band operation.
9. Steps 2-7 were repeated for wide band operation and the resulting captured spectrum analyzer display is included in this exhibit.

SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	OCCUPIED BANDWIDTH
FCC PART:	2.1049 (c)(1) per 95.635 (e)(1)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

NARROWBAND ANALYZER DISPLAY at 900mW:

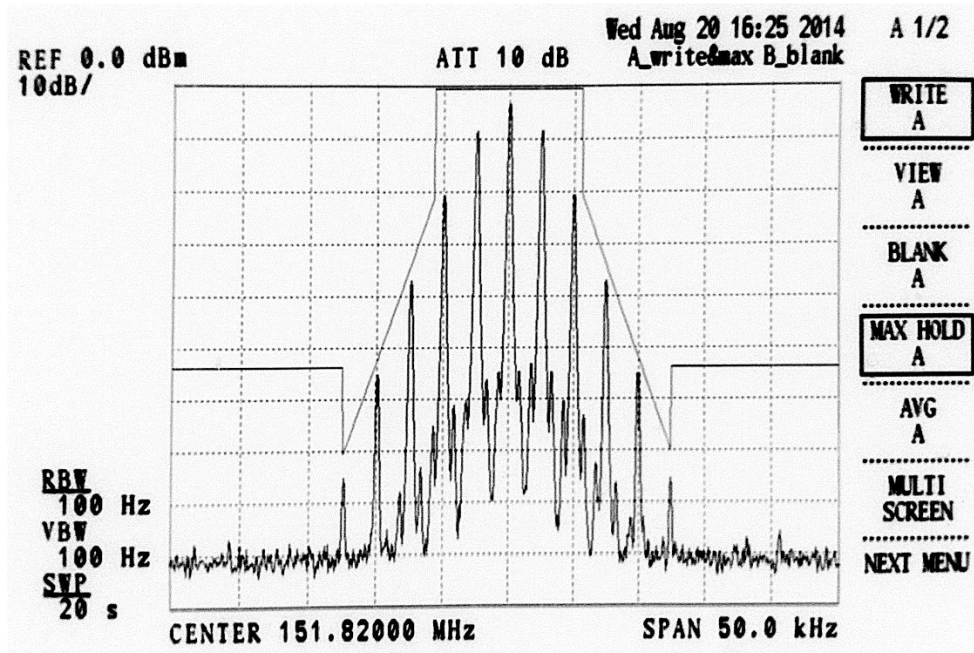


NARROWBAND ANALYZER DISPLAY at 2 W:

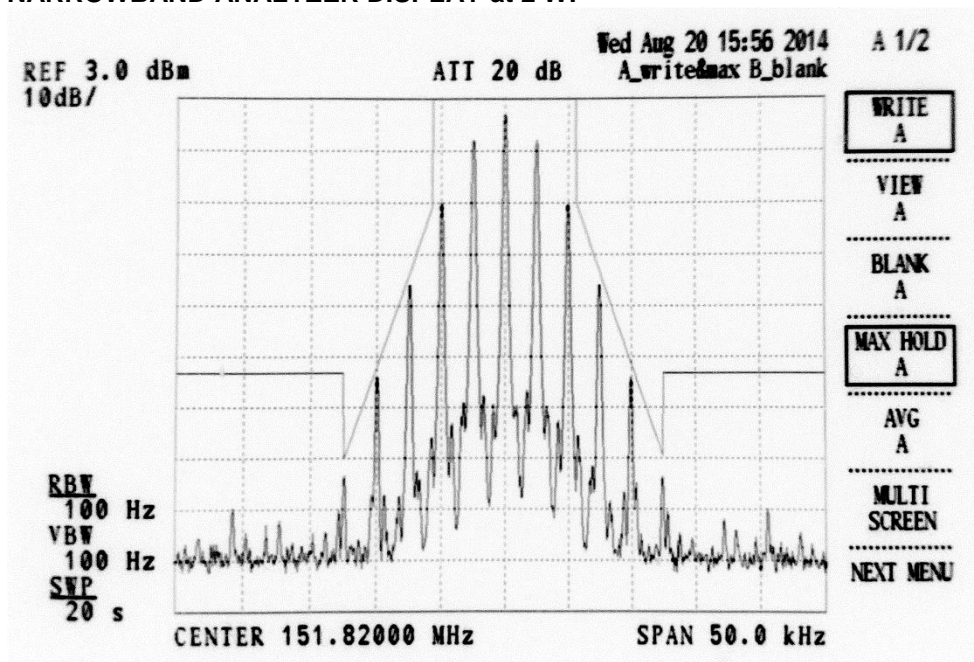


TYPE OF EXHIBIT:	OCCUPIED BANDWIDTH
FCC PART:	2.1049 (c)(1) per 95.635 (e)(2)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

WIDE BAND ANALYZER DISPLAY at 900mW:

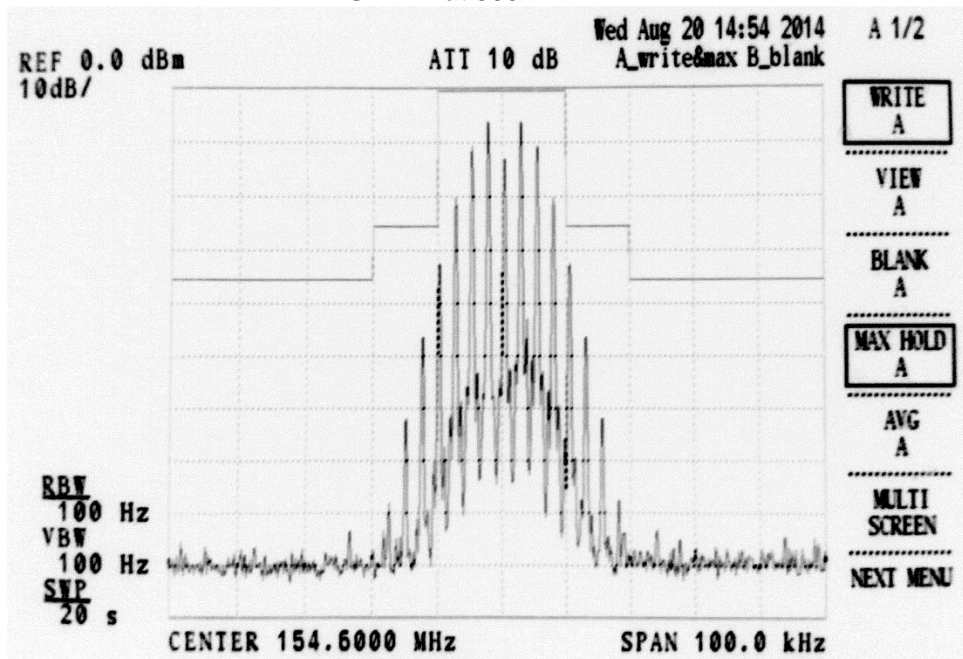

WIDE BAND ANALYZER DISPLAY at 2W:

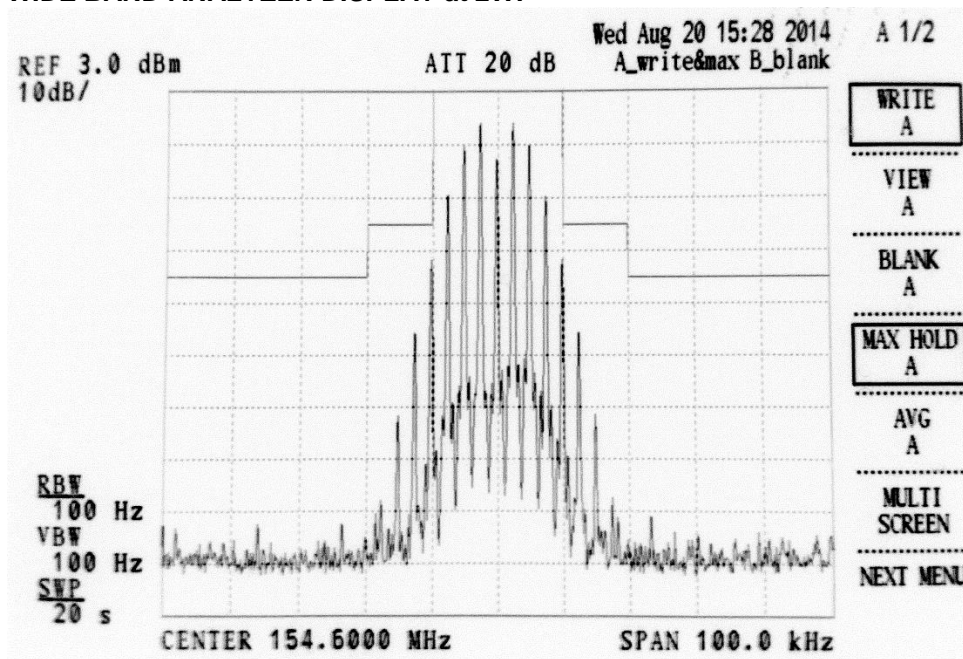

TYPE OF EXHIBIT:	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
FCC PART:	2.1051
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. The RQX-156M was programmed for transmitter operation on frequencies at the lower and upper range of the desired operating band.
2. Power was supplied to the RQX-156M at P603 Battery Connector by a BK Precision 1630 power supply set to 4.5 volts, an input voltage representing 3 fully charged D-cell batteries. The RF output of the RQX-156M was measured with an IFR COM-120B wattmeter at 900mW.
3. The transmitter was modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation as specified in FCC Part 2.1049 (c)(1).
4. The RQX-156M antenna port was connected to the Advantest R3265A spectrum analyzer through a Bird 8306-300-N 30dB attenuator.
5. The spectrum was searched from 8 MHz to the 10th harmonic of the operating frequency. All unreported emissions are more than 20 dB below the FCC limit.
6. Power was supplied to the RQX-156M at P603 Battery Connector by a BK Precision 1630 power supply set to 9.0 volts, an input voltage representing 6 fully charged AA-cell batteries. The RF output of the RQX-156M was measured with an IFR COM-120B wattmeter at 2W.
7. Steps 3-5 were repeated.

TYPE OF EXHIBIT:	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
FCC PART:	2.1051
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS:

Output Power: 0.9 W

FCC Attenuation per Part 95.635(e): -49.54 dBc

Multiple of Carrier	Emission Frequency (MHz)	Analyzer Reading (dBm)	Attenuation Correction Factor (dB)	Spurious Power (dBm)	Spurious Power (dBc)	FCC Limit (dBc)	FCC Margin (dB)
Carrier 4	151.820 607.280	-65.41	30.00	-35.41	-64.95	-49.54	15.41
Carrier 4	154.600 618.400	-69.22	30.00	-39.22	-68.76	-49.54	19.22

Output Power: 2 W

FCC Attenuation per Part 95.635(e): -53.01 dBc

Multiple of Carrier	Emission Frequency (MHz)	Analyzer Reading (dBm)	Attenuation Correction Factor (dB)	Spurious Power (dBm)	Spurious Power (dBc)	FCC Limit (dBc)	FCC Margin (dB)
Carrier 2 4	151.820 303.640 607.280	-66.25 -69.19	30.00 30.00	-36.25 -39.19	-69.26 -72.20	-53.01 -53.01	16.25 19.19
Carrier 2	154.600 309.200	-66.41	30.00	-36.41	-69.42	-53.01	16.41

SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	FIELD STRENGTH OF SPURIOUS EMISSIONS
FCC PART:	2.1053
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. Field strength of spurious radiation of the RQX-156M was taken at the RITRON, Inc. 3-meter test site, details of which are on file with the FCC. The measurements were via the substitution method.
2. The RQX-156M was aligned for transmitter operation on frequencies representing the lower and upper range of the desired operating band for each of the three configurations listed below.
3. The RQX-156M was tested in each of the three configurations:
 - Installed in the basic enclosure, powered by 3 D-cell batteries for 900mW TX power, operating with the internal antenna mounted on the PCB.
 - Installed in the basic enclosure, powered by 6 AA-cell batteries for 2W TX power, operating with the internal antenna mounted on the PCB.
 - Installed in an XT enclosure, powered by 6 D-cell batteries for 2W TX power, terminated at the antenna port with the Ritron AFB-1545 antenna include with the product. (The user can connect other antennas, however.)
4. All field strength measurements were made with the Advantest R3265A Spectrum Analyzer connected to the Electro-Metrics BDA-25 dipole, Electro-Metrics LPA-25 log periodic or EMCO horn receiving antenna. All harmonic measurements were made through a 272 MHz high pass filter.
5. A calibrated ½-wave dipole antenna was substituted at the radio side of the range driven by a known power level from an Agilent N5181A RF signal generator to produce a known ERP at each harmonic. The receiving antenna was oriented both vertically and horizontally and reference measurements were taken at each harmonic. All harmonic measurements were made through a 272 MHz high pass filter. Cable loss from generator to the dipole was taken into account.
6. For each emission, the height and polarization of the field strength measuring antenna and orientation of the RQX-156M was varied to find maximum field strength.
7. The spectrum was searched up to the 10th harmonic of the transmit frequency. All non-harmonics were less than 20 dB below the FCC limits specified in Part 95.635 (e). All harmonics with greater than 20 dB margin were not reported.

TYPE OF EXHIBIT:	FIELD STRENGTH OF SPURIOUS EMISSIONS
FCC PART:	2.1053
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS:

Installed in the basic enclosure, powered by 3 D-cell batteries for 900mW TX power, operating with the internal antenna mounted on the PCB.

Power Output: 0.9 W

FCC Attenuation per Part 95.635 (e): 49.5 dBc

RQX-156M				Horizontal			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
1	151.820	49.4	-1.24	-16.23	-4.75		
-	-	-	-	-	-	-	-
1	154.600	48.5	-1.21	-16.02	-6.84		
-	-	-	-	-	-	-	-

RQX-156M				Vertical			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
1	151.820	49.4	-1.24	-22.32	3.88		
-	-	-	-	-	-	-	-
1	154.600	48.5	-1.21	-21.83	4.91		
-	-	-	-	-	-	-	-

NOTE: All harmonics were less than 20dB below the FCC limit.

TYPE OF EXHIBIT:	FIELD STRENGTH OF SPURIOUS EMISSIONS
FCC PART:	2.1053
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS:

Installed in the basic enclosure, powered by 6 AA-cell batteries for 2W TX power, operating with the internal antenna mounted on the PCB.

Power Output: 2.0 W

FCC Attenuation per Part 95.635 (e): 53.0 dBc

RQX-156M				Horizontal			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
1	151.820	49.4	-1.24	-16.23	-4.75		
-	-	-	-	-	-	-	-
1	154.600	48.5	-1.21	-16.02	-6.84		
-	-	-	-	-	-	-	-

RQX-156M				Vertical			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
1	151.820	49.4	-1.24	-22.32	3.88		
-	-	-	-	-	-	-	-
1	154.600	48.5	-1.21	-21.83	4.91		
-	-	-	-	-	-	-	-

NOTE: All harmonics were less than 20dB below the FCC limit.

TYPE OF EXHIBIT:	FIELD STRENGTH OF SPURIOUS EMISSIONS
FCC PART:	2.1053
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS:

Installed in an XT enclosure, powered by 6 D-cell batteries for 2W TX power, terminated at the antenna port with the Ritron AFB-1545 antenna include with the product.

Power Output: 2.0 W

FCC Attenuation per Part 95.635 (e): 53.0 dBc

RQX-156M-XT				Horizontal			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
1	151.820	49.4	-1.24	-16.23	-12.74		
-	-	-	-	-	-	-	-
1	154.600	48.5	-1.21	-16.02	-12.09		
-	-	-	-	-	-	-	-

RQX-156M-XT				Vertical			
Multiple of Carrier	Emission Frequency MHz	1/2 Wave Dipole (cm)	Measured Reading @ 0 dBm	Substitution Reading @ 0 dBm	Spurious Reading dBm	Spurious level dBc	db below FCC Limit
1	151.820	49.4	-1.24	-22.32	-19.46		
-	-	-	-	-	-	-	-
1	154.600	48.5	-1.21	-21.83	-19.78		
-	-	-	-	-	-	-	-

NOTE: All harmonics were less than 20dB below the FCC limit.

SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. TEMPERATURE
FCC PART:	2.1055 (a)(1), 95.632(c)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:


1. The RQX-156M uses a 26.0 MHz reference oscillator for all 5 MURS frequencies.
2. The RQX-156M was programmed for operation at 151.820 MHz.
3. The unit was placed inside a Delta Design Model 3900 CL temperature chamber and power was supplied to the RQX-156M at P603 Battery Connector by a BK Precision 1630 power supply set to 4.5 VDC. The antenna terminal was connected to the input of an IFR COM-120B RF communications test set used to measure frequency of the carrier. A Triplet model 320-G/P thermocouple was placed inside the chamber to measure temperature.
4. Frequency was measured at +25°C and recorded as a reference frequency.
5. The temperature was raised to +30°C for 30 minutes, at which time the transmitter frequency was measured and recorded.
6. Step 5 was repeated in +10°C increments up to +60°C.
7. The unit was allowed to return naturally back to the ambient room temperature of +25°C.
8. The temperature was lowered to +20°C for 30 minutes, at which time the transmitter frequency was measured and recorded.
9. Step 8 was repeated in -10°C increments down to -30°C.
10. The frequency remained within the 5 ppm specified across the full -30°C to +60°C temperature range.

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. TEMPERATURE
FCC PART:	2.1055 (a)(1), 95.632(c)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

RESULTS:

26 MHz reference oscillator		
Temp °C	Frequency (MHz)	Error (ppm)
-30	151.819999	0.11
-20	151.819975	-0.05
-10	151.819963	-0.13
0	151.819935	-0.32
10	151.819927	-0.37
20	151.819965	-0.12
30	151.819965	-0.12
40	151.819947	-0.24
50	151.819922	-0.40
60	151.819912	-0.47
25	151.819983	


SIGNED:



Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. TEMPERATURE
FCC PART:	2.1055 (a)(1), 95.632(c)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PLOT:

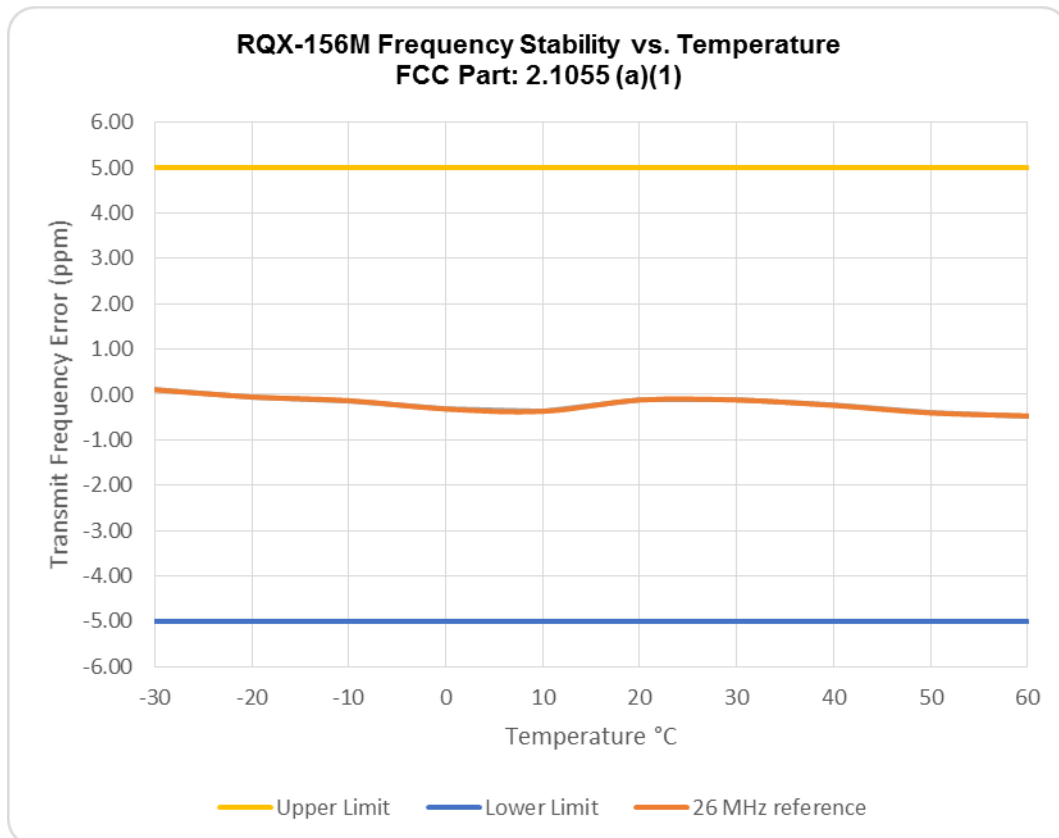

TYPE OF EXHIBIT:	FREQUENCY STABILITY VS. VOLTAGE
FCC PART:	2.1055 (d)(1), 95.632(c)
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. The RQX-156M uses a 26.0 MHz reference oscillator for all 5 MURS frequencies.
2. The RQX-156M was programmed for operation at 151.820 MHz.
3. The RQX-156M antenna terminal was connected to the input of an IFR COM-120B communications test set, used to measure frequency of the carrier.
4. A BK Precision Model 1630 power supply was used to apply supply voltage at the battery input.
5. Frequency was checked at voltages representing fully charged and fully discharged condition.
3 fully discharged D-cell batteries = 3.3 V 3 fully charged D-cell batteries = 4.5 V
6 fully discharged AA-cell batteries = 6.6 V 6 fully charged AA-cell batteries = 9.0 V
6. The radio was put into transmit mode and frequency measured.
7. A BK Precision Model 1630 power supply was used to apply supply voltage at the external power input.
8. Frequency was checked from 85% to 115% of the specified operating voltage of 12 V.
Minimum of $12 \times 0.85 = 10.2$ V Maximum of $12 \times 1.15 = 13.8$ V
9. The frequency remained within the 5 ppm specified across operating voltage range.

RESULTS:

VDC	Condition	26 MHz oscillator	
		Frequency (MHz)	Error (ppm)
10.2	External Power @ 85%	151.819969	-0.20
12.0	External Power Nominal	151.819962	-0.25
13.8	External Power @ 115%	151.819959	-0.27
3.3	3 D-cell batteries fully discharged	151.819875	-0.82
4.5	3 D-cell batteries fully charged	151.819969	-0.20
6.6	6 AA-cell batteries fully discharged	151.819966	-0.22
9.0	6 AA-cell batteries fully charged	151.819962	-0.25

SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer


TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

PROCEDURE:

1. The RQX-156M was aligned for transmitter operation at 2W power level per the tune-up procedure for frequencies representing the lower and upper range of the desired operating band.
2. Power was supplied to the RQX-156M at the BATTERY input by a BK Precision 1630 power supply set to 9.0 VDC.
3. The test equipment was connected per the TEST SETUP diagram.
4. The IFR COM-120B receiver was set to measure FM deviation with the audio bandwidth set at ≤ 20 Hz to 15 kHz at an RF frequency at the low end of the desired operating band.
5. The RQX-156M transmitter under test was turned on and the IFR COM-120B Spectrum Analyzer was used to measure the RF power level through the test network.
6. The RQX-156M transmitter was turned off.
7. The IFR COM-120B RF signal generator was set to the transmit frequency at an RF level 30 dB below that measured in step 5, modulated with a 1 kHz tone at ± 12.5 kHz deviation.
8. The Phillips PM-3335 digital oscilloscope horizontal sweep rate was set to 10 mS per division. The vertical amplitude control was adjusted to display the 1000 Hz demodulated audio from the signal generator at ± 4 divisions (3.125 kHz/div), vertically centered on the screen.
9. The Phillips PM-3335 digital oscilloscope was set to trigger at 1 division from the left side of the display when the RF detector senses RF power from the RQX-156M transmitter.
10. The RQX-156M transmitter is turned on and the resulting waveform on the oscilloscope display was stored and plotted. The FCC limits per Part 90.214 were added to the plot in the same manner illustrated in EIA-603-B Part 2.2.19.3. The resulting plot is labeled "Switch ON" and shows compliance with FCC Part 90.214.
11. The Phillips PM-3335 digital oscilloscope was set to trigger at 1 division from the right side of the display when the RF detector senses loss of RF power from the RQX-156M transmitter.
12. The RQX-156M transmitter is turned off and the resulting waveform on the oscilloscope display was stored and plotted. The FCC limits per Part 90.214 were added to the plot in the same manner illustrated in EIA-603-B Part 2.2.19.3. The resulting plot is labeled "Switch OFF" and shows compliance with FCC Part 90.214.
13. The test procedure was repeated for frequencies at the lower and upper range of the desired operating band. The worst case response occurred at the low end of the specified operating band, with the resulting display included in this exhibit.


TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

TEST SETUP:

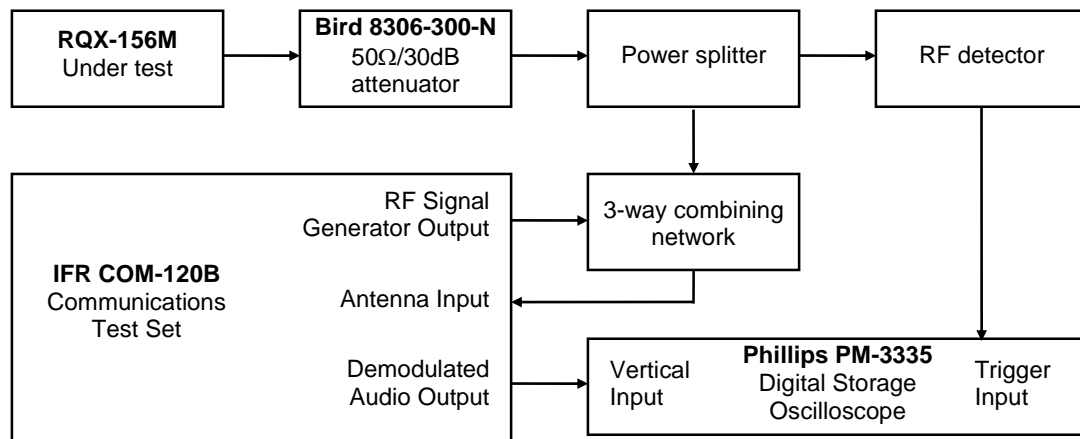

TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

SWITCH ON CONDITION

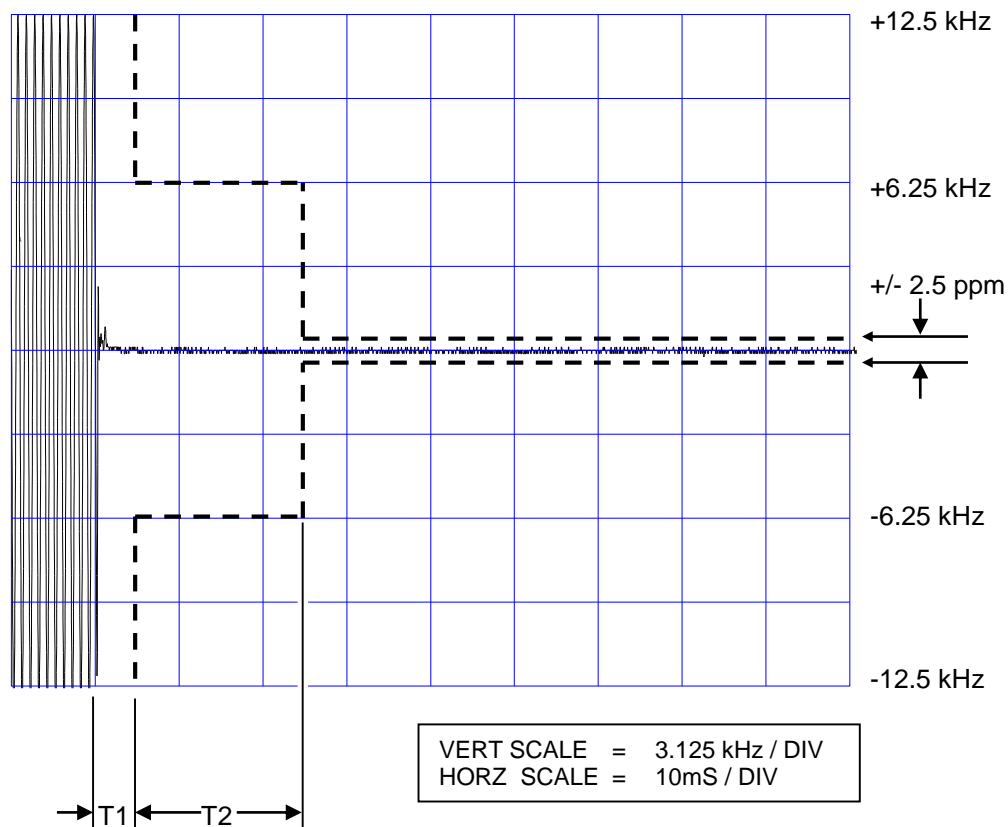


SIGNED:

Michael A. Pickard

Michael A. Pickard - Project Engineer

TYPE OF EXHIBIT:	TRANSIENT FREQUENCY BEHAVIOR
FCC PART:	90.214
MANUFACTURER:	RITRON, INC.
MODELS:	RQX-156M, RQX-156M-XT
TYPE OF UNIT:	MURS VHF-FM Callbox 2-Way Radio
FCC ID:	AIERIT38-156M
DATE:	August 21, 2014

SWITCH OFF CONDITION

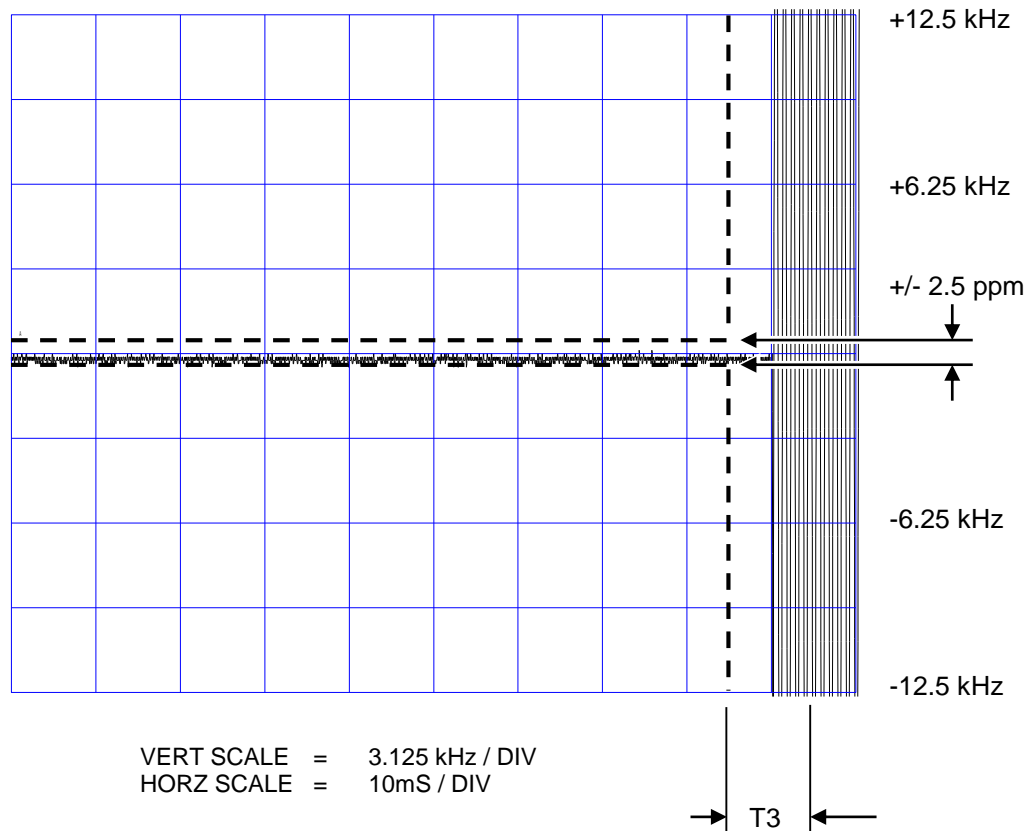

SIGNED:

Michael A. Pickard
Michael A. Pickard - Project Engineer