

**Appendix A:Maximum Transmitter Power**

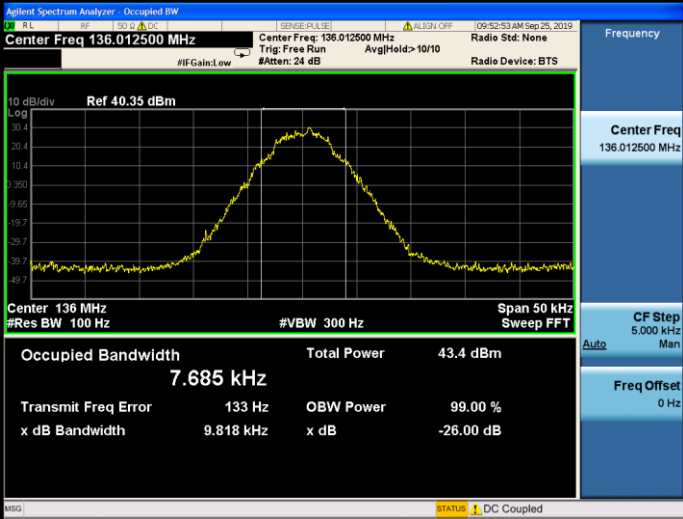
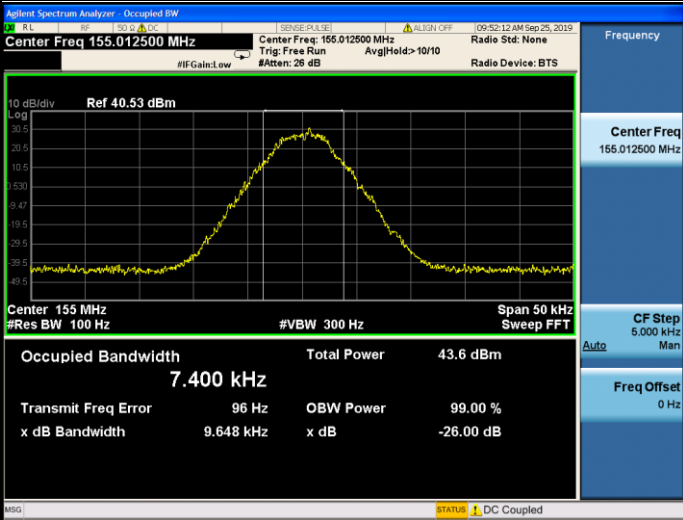
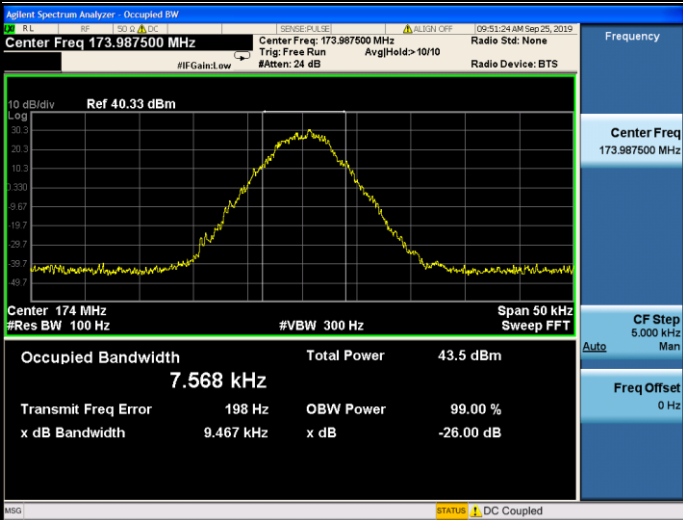
Operation Mode	Modulation Type	Test Channel	Measured Power(dBm)	Measured Power(W)	Rated Power(W)	Percentage (%)	Limit (%)	Result
TX-DNH	4FSK	CH _L	36.8	4.79	5.00	-4.3	±20	PASS
TX-DNH	4FSK	CH _{M2}	36.9	4.88	5.00	-2.5	±20	PASS
TX-DNH	4FSK	CH _H	36.8	4.79	5.00	-4.3	±20	PASS
TX-DNL	4FSK	CH _L	32.9	1.96	2.00	-2.1	±20	PASS
TX-DNL	4FSK	CH _{M2}	32.8	1.89	2.00	-5.4	±20	PASS
TX-DNL	4FSK	CH _H	32.8	1.89	2.00	-5.6	±20	PASS
TX-ANH	FM	CH _L	36.9	4.85	5.00	-3.0	±20	PASS
TX-ANH	FM	CH _{M2}	36.7	4.68	5.00	-6.5	±20	PASS
TX-ANH	FM	CH _H	36.9	4.90	5.00	-2.0	±20	PASS
TX-ANL	FM	CH _L	32.6	1.82	2.00	-9.0	±20	PASS
TX-ANL	FM	CH _{M2}	32.7	1.86	2.00	-6.9	±20	PASS
TX-ANL	FM	CH _H	32.5	1.78	2.00	-11.1	±20	PASS

**Appendix B:Occupied Bandwidth**

Operation Mode	Modulation Type	Test Channel	Occupied Bandwidth		99% Limit(kHz)	Result
			99%(kHz)	26dB(kHz)		
TX-DNH	4FSK	CH _L	7.685	9.818	≤11.25	PASS
TX-DNH	4FSK	CH _{M2}	7.400	9.648	≤11.25	PASS
TX-DNH	4FSK	CH _H	7.568	9.467	≤11.25	PASS
TX-DNL	4FSK	CH _L	7.574	9.304	≤11.25	PASS
TX-DNL	4FSK	CH _{M2}	7.515	9.307	≤11.25	PASS
TX-DNL	4FSK	CH _H	7.559	9.601	≤11.25	PASS
TX-ANH	FM	CH _L	5.236	10.110	≤11.25	PASS
TX-ANH	FM	CH _{M2}	5.231	10.100	≤11.25	PASS
TX-ANH	FM	CH _H	5.235	10.110	≤11.25	PASS
TX-ANL	FM	CH _L	5.236	10.110	≤11.25	PASS
TX-ANL	FM	CH _{M2}	5.231	10.100	≤11.25	PASS
TX-ANL	FM	CH _H	5.233	10.110	≤11.25	PASS

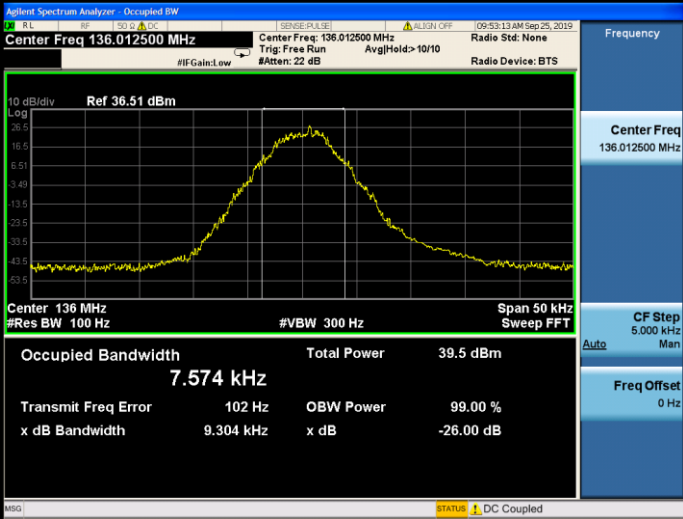
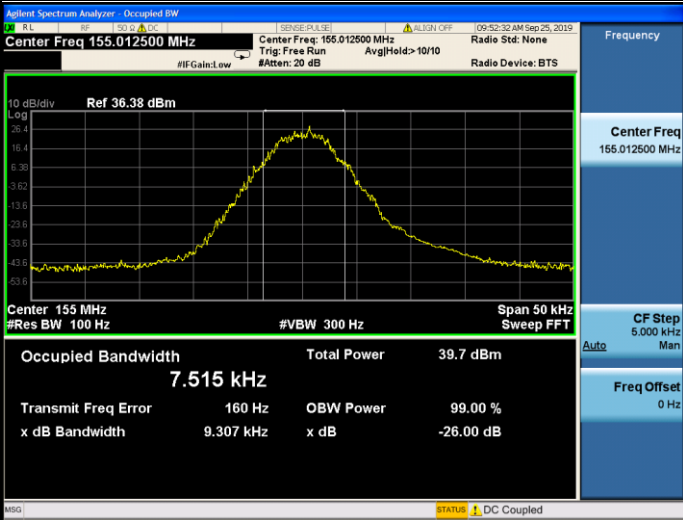
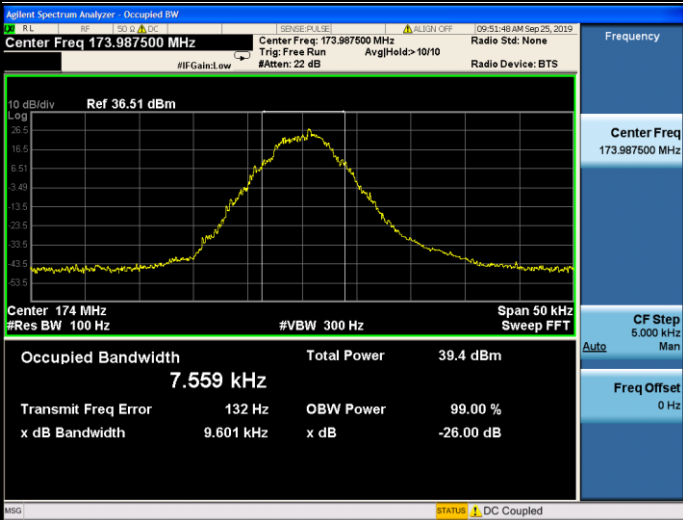


Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNH	4FSK	CH _L	 Agilent Spectrum Analyzer - Occupied BW Center Freq 136.012500 MHz Center Freq: 136.012500 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 40.35 dBm Center 136 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT Occupied Bandwidth 7.685 kHz Total Power 43.4 dBm Transmit Freq Error 133 Hz OBW Power 99.00 % x dB Bandwidth 9.818 kHz x dB -26.00 dB Frequency Center Freq 136.012500 MHz CF Step 5.000 kHz Man Freq Offset 0 Hz Auto STATUS DC Coupled
TX-DNH	4FSK	CH _{M2}	 Agilent Spectrum Analyzer - Occupied BW Center Freq 155.012500 MHz Center Freq: 155.012500 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 40.53 dBm Center 155 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT Occupied Bandwidth 7.400 kHz Total Power 43.6 dBm Transmit Freq Error 96 Hz OBW Power 99.00 % x dB Bandwidth 9.648 kHz x dB -26.00 dB Frequency Center Freq 155.012500 MHz CF Step 5.000 kHz Man Freq Offset 0 Hz Auto STATUS DC Coupled
TX-DNH	4FSK	CH _H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 173.987500 MHz Center Freq: 173.987500 MHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref 40.33 dBm Center 174 MHz #Res BW 100 Hz #VBW 300 Hz Span 50 kHz Sweep FFT Occupied Bandwidth 7.568 kHz Total Power 43.5 dBm Transmit Freq Error 198 Hz OBW Power 99.00 % x dB Bandwidth 9.467 kHz x dB -26.00 dB Frequency Center Freq 173.987500 MHz CF Step 5.000 kHz Man Freq Offset 0 Hz Auto STATUS DC Coupled

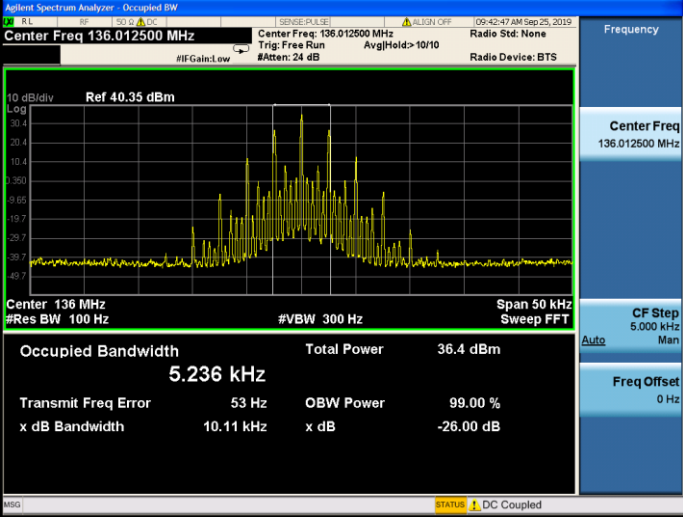
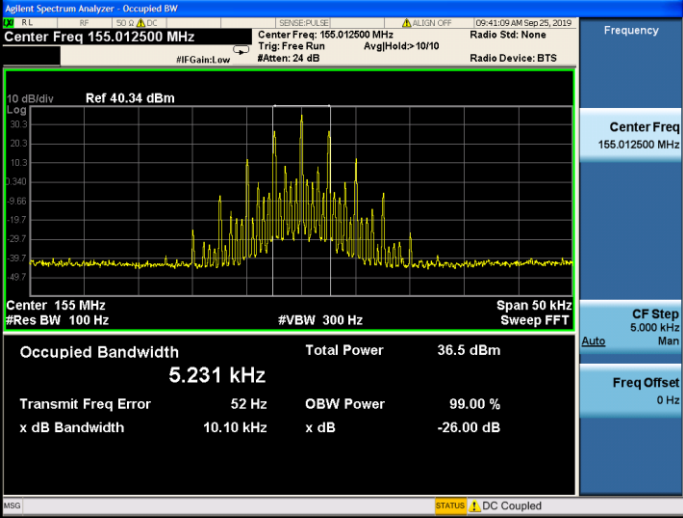
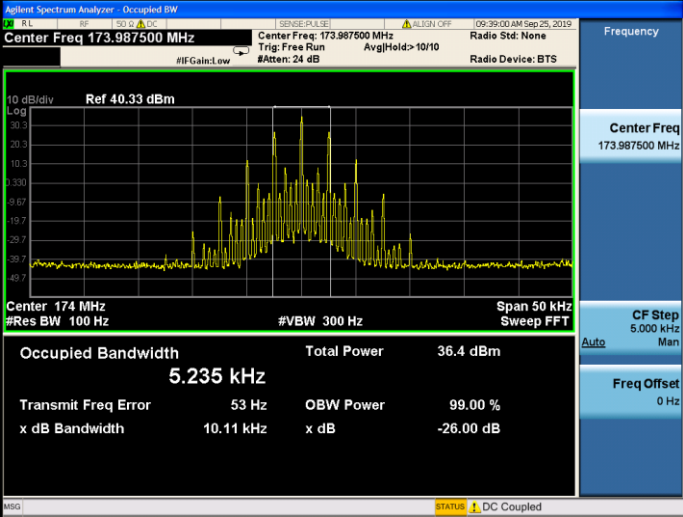


Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-DNL	4FSK	CH _L	
TX-DNL	4FSK	CH _{M2}	
TX-DNL	4FSK	CH _H	

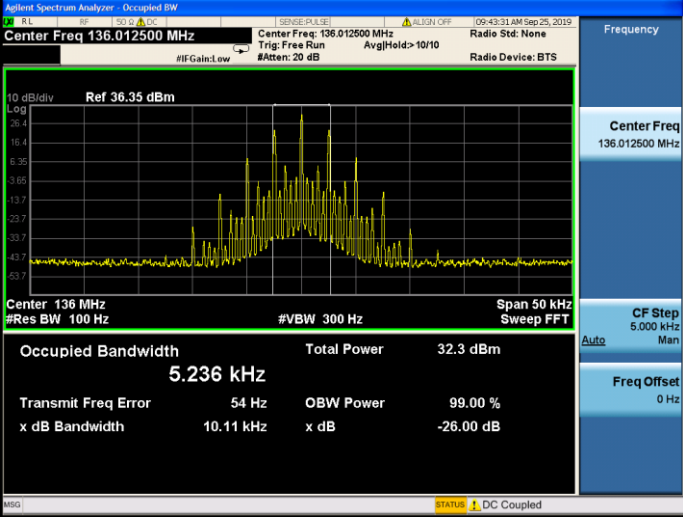
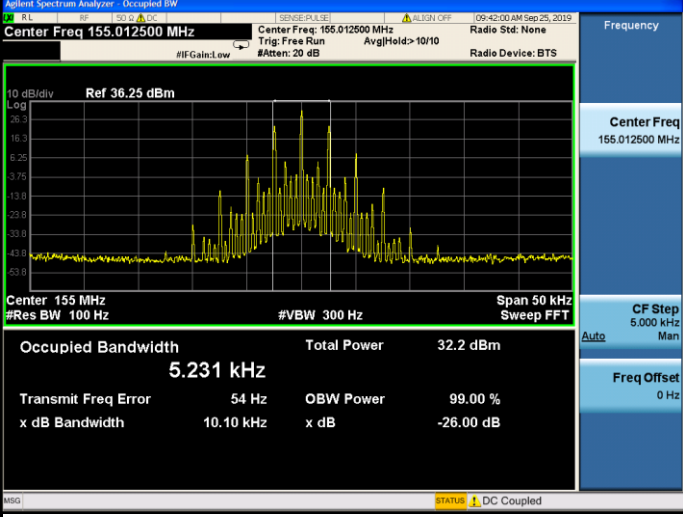
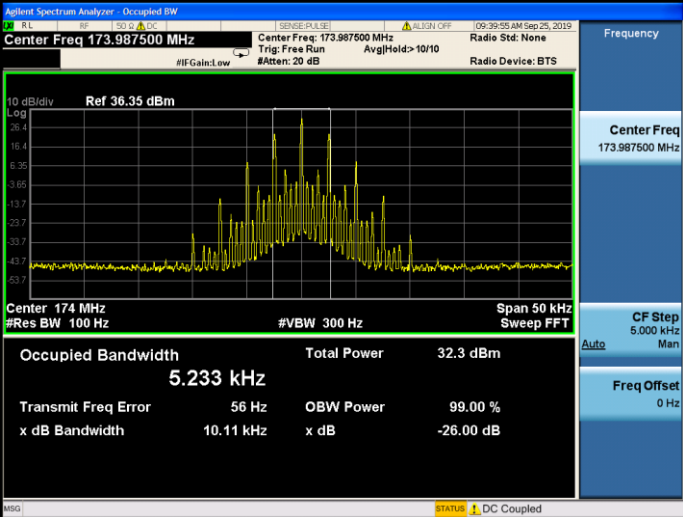


Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-ANH	FM	CH _L	
TX-ANH	FM	CH _{M2}	
TX-ANH	FM	CH _H	

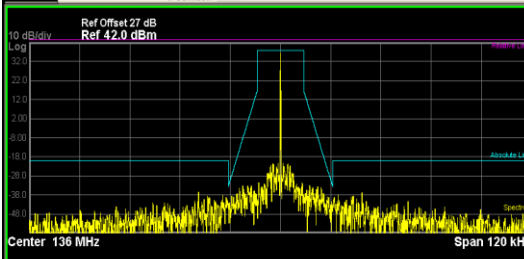
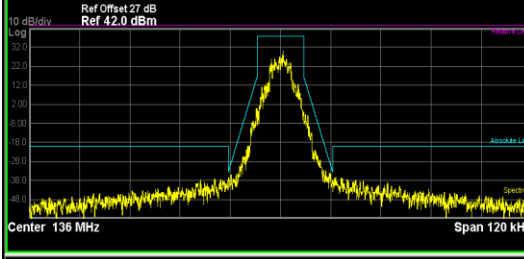
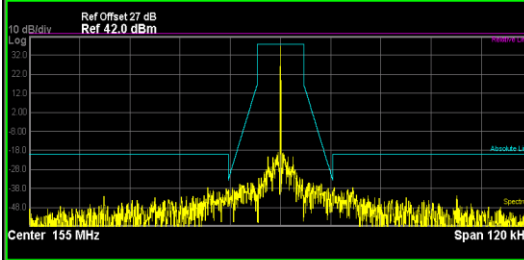


Appendix B:Occupied Bandwidth

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT
TX-ANL	FM	CH _L	
TX-ANL	FM	CH _{M2}	
TX-ANL	FM	CH _H	



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																															
TX-DNH	4FSK	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 136.012500 MHz PASS Ref Offset 27 dB Ref 42.0 dBm  Center 136 MHz Span 120 kHz Total Power Ref 37.00 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>5.625 kHz</td><td>100.0 Hz</td><td>36.33</td><td>(-1.26)</td><td>0.0</td><td>36.48</td><td>(-1.13)</td><td>50.00</td></tr><tr><td>5.625 kHz</td><td>12.50 kHz</td><td>100.0 Hz</td><td>-42.59</td><td>(-9.85)</td><td>-12.35 k</td><td>-41.32</td><td>(-8.95)</td><td>12.30 k</td></tr><tr><td>12.50 kHz</td><td>60.00 kHz</td><td>100.0 Hz</td><td>-36.45</td><td>(-16.45)</td><td>-19.45 k</td><td>-36.76</td><td>(-16.76)</td><td>19.55 k</td></tr><tr><td>4.000 MHz</td><td>8.000 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 136.012500 MHz CF Step 12.000 kHz Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	36.33	(-1.26)	0.0	36.48	(-1.13)	50.00	5.625 kHz	12.50 kHz	100.0 Hz	-42.59	(-9.85)	-12.35 k	-41.32	(-8.95)	12.30 k	12.50 kHz	60.00 kHz	100.0 Hz	-36.45	(-16.45)	-19.45 k	-36.76	(-16.76)	19.55 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	36.33	(-1.26)	0.0	36.48	(-1.13)	50.00																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-42.59	(-9.85)	-12.35 k	-41.32	(-8.95)	12.30 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-36.45	(-16.45)	-19.45 k	-36.76	(-16.76)	19.55 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-DNH	4FSK	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 136.012500 MHz PASS Ref Offset 27 dB Ref 42.0 dBm  Center 136 MHz Span 120 kHz Total Power Ref 39.77 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>5.625 kHz</td><td>100.0 Hz</td><td>26.96</td><td>(-10.65)</td><td>-150.0</td><td>30.00</td><td>(-7.60)</td><td>600.0</td></tr><tr><td>5.625 kHz</td><td>12.50 kHz</td><td>100.0 Hz</td><td>-36.48</td><td>(-4.11)</td><td>-12.30 k</td><td>-34.91</td><td>(-4.71)</td><td>12.00 k</td></tr><tr><td>12.50 kHz</td><td>60.00 kHz</td><td>100.0 Hz</td><td>-37.19</td><td>(-17.19)</td><td>-15.70 k</td><td>-36.11</td><td>(-16.11)</td><td>13.30 k</td></tr><tr><td>4.000 MHz</td><td>8.000 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 136.012500 MHz CF Step 12.000 kHz Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	26.96	(-10.65)	-150.0	30.00	(-7.60)	600.0	5.625 kHz	12.50 kHz	100.0 Hz	-36.48	(-4.11)	-12.30 k	-34.91	(-4.71)	12.00 k	12.50 kHz	60.00 kHz	100.0 Hz	-37.19	(-17.19)	-15.70 k	-36.11	(-16.11)	13.30 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	26.96	(-10.65)	-150.0	30.00	(-7.60)	600.0																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-36.48	(-4.11)	-12.30 k	-34.91	(-4.71)	12.00 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-37.19	(-17.19)	-15.70 k	-36.11	(-16.11)	13.30 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-DNH	4FSK	CH _{M2}	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 155.012500 MHz PASS Ref Offset 27 dB Ref 42.0 dBm  Center 155 MHz Span 120 kHz Total Power Ref 37.23 dBm/0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>5.625 kHz</td><td>100.0 Hz</td><td>36.46</td><td>(-1.30)</td><td>0.0</td><td>36.70</td><td>(-1.06)</td><td>50.00</td></tr><tr><td>5.625 kHz</td><td>12.50 kHz</td><td>100.0 Hz</td><td>-38.74</td><td>(-5.06)</td><td>-12.50 k</td><td>-39.19</td><td>(-5.87)</td><td>12.45 k</td></tr><tr><td>12.50 kHz</td><td>60.00 kHz</td><td>100.0 Hz</td><td>-37.51</td><td>(-17.51)</td><td>-17.30 k</td><td>-37.65</td><td>(-17.65)</td><td>17.35 k</td></tr><tr><td>4.000 MHz</td><td>8.000 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> Frequency Center Freq 155.012500 MHz CF Step 12.000 kHz Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	36.46	(-1.30)	0.0	36.70	(-1.06)	50.00	5.625 kHz	12.50 kHz	100.0 Hz	-38.74	(-5.06)	-12.50 k	-39.19	(-5.87)	12.45 k	12.50 kHz	60.00 kHz	100.0 Hz	-37.51	(-17.51)	-17.30 k	-37.65	(-17.65)	17.35 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	36.46	(-1.30)	0.0	36.70	(-1.06)	50.00																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-38.74	(-5.06)	-12.50 k	-39.19	(-5.87)	12.45 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-37.51	(-17.51)	-17.30 k	-37.65	(-17.65)	17.35 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										



Appendix C:Emission Mask

Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																															
TX-DNH	4FSK	CH _{M2}	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 3.0 100.000 Center Freq 155.012500 MHz Trig: Free Run Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 27 dB Ref 42.0 dBm 10 dB/div Log 32.0 22.0 12.0 2.00 8.00 18.0 28.0 38.0 48.0 Center 155 MHz Span 120 kHz Total Power Ref 40.45 dBm 0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>5.625 kHz</td><td>100.0 Hz</td><td>25.69</td><td>(-12.07)</td><td>-600.0</td><td>27.54</td><td>(-10.21)</td><td>900.0</td></tr><tr><td>5.625 kHz</td><td>12.50 kHz</td><td>100.0 Hz</td><td>-37.82</td><td>(-4.87)</td><td>-12.40 k</td><td>-34.62</td><td>(-3.48)</td><td>12.15 k</td></tr><tr><td>12.50 kHz</td><td>60.00 kHz</td><td>100.0 Hz</td><td>-36.10</td><td>(-16.10)</td><td>-16.05 k</td><td>-34.50</td><td>(-14.50)</td><td>13.05 k</td></tr><tr><td>4.000 MHz</td><td>8.000 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> File <Temp.png> saved STATUS Frequency Center Freq 155.012500 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	25.69	(-12.07)	-600.0	27.54	(-10.21)	900.0	5.625 kHz	12.50 kHz	100.0 Hz	-37.82	(-4.87)	-12.40 k	-34.62	(-3.48)	12.15 k	12.50 kHz	60.00 kHz	100.0 Hz	-36.10	(-16.10)	-16.05 k	-34.50	(-14.50)	13.05 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	25.69	(-12.07)	-600.0	27.54	(-10.21)	900.0																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-37.82	(-4.87)	-12.40 k	-34.62	(-3.48)	12.15 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-36.10	(-16.10)	-16.05 k	-34.50	(-14.50)	13.05 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-DNH	4FSK	CH _H	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 3.0 100.000 Center Freq 173.987500 MHz Trig: Free Run Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 27 dB Ref 42.0 dBm 10 dB/div Log 32.0 22.0 12.0 2.00 8.00 18.0 28.0 38.0 48.0 Center 174 MHz Span 120 kHz Total Power Ref 36.65 dBm 0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>5.625 kHz</td><td>100.0 Hz</td><td>36.41</td><td>(-1.40)</td><td>0.0</td><td>36.71</td><td>(-1.10)</td><td>50.00</td></tr><tr><td>5.625 kHz</td><td>12.50 kHz</td><td>100.0 Hz</td><td>-37.06</td><td>(-8.89)</td><td>-11.75 k</td><td>-36.82</td><td>(-8.28)</td><td>11.80 k</td></tr><tr><td>12.50 kHz</td><td>60.00 kHz</td><td>100.0 Hz</td><td>-38.30</td><td>(-18.30)</td><td>-13.70 k</td><td>-38.40</td><td>(-18.40)</td><td>13.80 k</td></tr><tr><td>4.000 MHz</td><td>8.000 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> File <MASK D.state> recalled STATUS Frequency Center Freq 173.987500 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	36.41	(-1.40)	0.0	36.71	(-1.10)	50.00	5.625 kHz	12.50 kHz	100.0 Hz	-37.06	(-8.89)	-11.75 k	-36.82	(-8.28)	11.80 k	12.50 kHz	60.00 kHz	100.0 Hz	-38.30	(-18.30)	-13.70 k	-38.40	(-18.40)	13.80 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	36.41	(-1.40)	0.0	36.71	(-1.10)	50.00																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-37.06	(-8.89)	-11.75 k	-36.82	(-8.28)	11.80 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-38.30	(-18.30)	-13.70 k	-38.40	(-18.40)	13.80 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-DNH	4FSK	CH _H	Agilent Spectrum Analyzer - Spectrum Emission Mask 0 3.0 100.000 Center Freq 173.987500 MHz Trig: Free Run Avg: 100.00% of 10 Radio Std: None Radio Device: BTS Ref Offset 27 dB Ref 42.0 dBm 10 dB/div Log 32.0 22.0 12.0 2.00 8.00 18.0 28.0 38.0 48.0 Center 174 MHz Span 120 kHz Total Power Ref 40.33 dBm 0.0125 MHz <table><tr><th>Start Freq</th><th>Stop Freq</th><th>Integ BW</th><th>dBm</th><th>Lower ΔLim(dB)</th><th>Freq (Hz)</th><th>< Peak > dBm</th><th>Upper ΔLim(dB)</th><th>Freq (Hz)</th></tr><tr><td>0.0 Hz</td><td>5.625 kHz</td><td>100.0 Hz</td><td>27.84</td><td>(-9.97)</td><td>-200.0</td><td>28.98</td><td>(-8.83)</td><td>700.0</td></tr><tr><td>5.625 kHz</td><td>12.50 kHz</td><td>100.0 Hz</td><td>-37.26</td><td>(-4.36)</td><td>-12.40 k</td><td>-36.23</td><td>(-5.15)</td><td>12.15 k</td></tr><tr><td>12.50 kHz</td><td>60.00 kHz</td><td>100.0 Hz</td><td>-36.24</td><td>(-16.24)</td><td>-14.65 k</td><td>-35.67</td><td>(-15.67)</td><td>12.70 k</td></tr><tr><td>4.000 MHz</td><td>8.000 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>8.000 MHz</td><td>12.50 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr><tr><td>12.50 MHz</td><td>15.00 MHz</td><td>1.000 MHz</td><td>—</td><td>(—)</td><td>—</td><td>—</td><td>(—)</td><td>—</td></tr></table> File <Temp.png> saved STATUS Frequency Center Freq 173.987500 MHz CF Step 12.000 kHz Auto Man Freq Offset 0 Hz	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	27.84	(-9.97)	-200.0	28.98	(-8.83)	700.0	5.625 kHz	12.50 kHz	100.0 Hz	-37.26	(-4.36)	-12.40 k	-36.23	(-5.15)	12.15 k	12.50 kHz	60.00 kHz	100.0 Hz	-36.24	(-16.24)	-14.65 k	-35.67	(-15.67)	12.70 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	< Peak > dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	27.84	(-9.97)	-200.0	28.98	(-8.83)	700.0																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-37.26	(-4.36)	-12.40 k	-36.23	(-5.15)	12.15 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-36.24	(-16.24)	-14.65 k	-35.67	(-15.67)	12.70 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										



Operation Mode	Modulation Type	Test Channel	TEST PLOT RESULT																																																															
TX-DNL	4FSK	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 136.012500 MHz Ref Offset 27 dB Ref 38.0 dBm Total Power Ref 33.06 dBm @ 0.0125 MHz <table border="1"> <thead> <tr> <th>Start Freq</th> <th>Stop Freq</th> <th>Integ BW</th> <th>dBm</th> <th>Lower ΔLim(dB)</th> <th>Freq (Hz)</th> <th>Peak dBm</th> <th>Upper ΔLim(dB)</th> <th>Freq (Hz)</th> </tr> </thead> <tbody> <tr> <td>0.0 Hz</td> <td>5.625 kHz</td> <td>100.0 Hz</td> <td>32.33</td> <td>(-1.44)</td> <td>0.0</td> <td>32.53</td> <td>(-1.24)</td> <td>50.00</td> </tr> <tr> <td>5.625 kHz</td> <td>12.50 kHz</td> <td>100.0 Hz</td> <td>-45.78</td> <td>(-8.11)</td> <td>-12.50 k</td> <td>-45.18</td> <td>(-10.05)</td> <td>12.15 k</td> </tr> <tr> <td>12.50 kHz</td> <td>60.00 kHz</td> <td>100.0 Hz</td> <td>-41.64</td> <td>(-21.64)</td> <td>-13.10 k</td> <td>-41.37</td> <td>(-21.37)</td> <td>13.20 k</td> </tr> <tr> <td>4.000 MHz</td> <td>8.000 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> <tr> <td>8.000 MHz</td> <td>12.50 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> <tr> <td>12.50 MHz</td> <td>15.00 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> </tbody> </table>	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	Peak dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	32.33	(-1.44)	0.0	32.53	(-1.24)	50.00	5.625 kHz	12.50 kHz	100.0 Hz	-45.78	(-8.11)	-12.50 k	-45.18	(-10.05)	12.15 k	12.50 kHz	60.00 kHz	100.0 Hz	-41.64	(-21.64)	-13.10 k	-41.37	(-21.37)	13.20 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	Peak dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	32.33	(-1.44)	0.0	32.53	(-1.24)	50.00																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-45.78	(-8.11)	-12.50 k	-45.18	(-10.05)	12.15 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-41.64	(-21.64)	-13.10 k	-41.37	(-21.37)	13.20 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-DNL	4FSK	CH _L	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 136.012500 MHz Ref Offset 27 dB Ref 38.0 dBm Total Power Ref 35.45 dBm @ 0.0125 MHz <table border="1"> <thead> <tr> <th>Start Freq</th> <th>Stop Freq</th> <th>Integ BW</th> <th>dBm</th> <th>Lower ΔLim(dB)</th> <th>Freq (Hz)</th> <th>Peak dBm</th> <th>Upper ΔLim(dB)</th> <th>Freq (Hz)</th> </tr> </thead> <tbody> <tr> <td>0.0 Hz</td> <td>5.625 kHz</td> <td>100.0 Hz</td> <td>21.30</td> <td>(-12.47)</td> <td>-250.0</td> <td>25.93</td> <td>(-7.84)</td> <td>650.0</td> </tr> <tr> <td>5.625 kHz</td> <td>12.50 kHz</td> <td>100.0 Hz</td> <td>-39.36</td> <td>(3.14)</td> <td>-12.30 k</td> <td>-38.85</td> <td>(-1.54)</td> <td>12.45 k</td> </tr> <tr> <td>12.50 kHz</td> <td>60.00 kHz</td> <td>100.0 Hz</td> <td>-40.88</td> <td>(-20.88)</td> <td>-16.30 k</td> <td>-40.41</td> <td>(-20.41)</td> <td>12.90 k</td> </tr> <tr> <td>4.000 MHz</td> <td>8.000 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> <tr> <td>8.000 MHz</td> <td>12.50 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> <tr> <td>12.50 MHz</td> <td>15.00 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> </tbody> </table>	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	Peak dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	21.30	(-12.47)	-250.0	25.93	(-7.84)	650.0	5.625 kHz	12.50 kHz	100.0 Hz	-39.36	(3.14)	-12.30 k	-38.85	(-1.54)	12.45 k	12.50 kHz	60.00 kHz	100.0 Hz	-40.88	(-20.88)	-16.30 k	-40.41	(-20.41)	12.90 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	Peak dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	21.30	(-12.47)	-250.0	25.93	(-7.84)	650.0																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-39.36	(3.14)	-12.30 k	-38.85	(-1.54)	12.45 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-40.88	(-20.88)	-16.30 k	-40.41	(-20.41)	12.90 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
TX-DNL	4FSK	CH _{M2}	Agilent Spectrum Analyzer - Spectrum Emission Mask Center Freq 155.012500 MHz Ref Offset 27 dB Ref 37.0 dBm Total Power Ref 32.29 dBm @ 0.0125 MHz <table border="1"> <thead> <tr> <th>Start Freq</th> <th>Stop Freq</th> <th>Integ BW</th> <th>dBm</th> <th>Lower ΔLim(dB)</th> <th>Freq (Hz)</th> <th>Peak dBm</th> <th>Upper ΔLim(dB)</th> <th>Freq (Hz)</th> </tr> </thead> <tbody> <tr> <td>0.0 Hz</td> <td>5.625 kHz</td> <td>100.0 Hz</td> <td>32.02</td> <td>(-1.26)</td> <td>0.0</td> <td>32.36</td> <td>(-0.91)</td> <td>50.00</td> </tr> <tr> <td>5.625 kHz</td> <td>12.50 kHz</td> <td>100.0 Hz</td> <td>-43.61</td> <td>(-8.36)</td> <td>-12.10 k</td> <td>-43.48</td> <td>(-7.50)</td> <td>12.20 k</td> </tr> <tr> <td>12.50 kHz</td> <td>60.00 kHz</td> <td>100.0 Hz</td> <td>-39.26</td> <td>(-19.26)</td> <td>-13.15 k</td> <td>-38.98</td> <td>(-18.98)</td> <td>13.25 k</td> </tr> <tr> <td>4.000 MHz</td> <td>8.000 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> <tr> <td>8.000 MHz</td> <td>12.50 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> <tr> <td>12.50 MHz</td> <td>15.00 MHz</td> <td>1.000 MHz</td> <td>—</td> <td>(—)</td> <td>—</td> <td>—</td> <td>(—)</td> <td>—</td> </tr> </tbody> </table>	Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	Peak dBm	Upper ΔLim(dB)	Freq (Hz)	0.0 Hz	5.625 kHz	100.0 Hz	32.02	(-1.26)	0.0	32.36	(-0.91)	50.00	5.625 kHz	12.50 kHz	100.0 Hz	-43.61	(-8.36)	-12.10 k	-43.48	(-7.50)	12.20 k	12.50 kHz	60.00 kHz	100.0 Hz	-39.26	(-19.26)	-13.15 k	-38.98	(-18.98)	13.25 k	4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—	8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—	12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—
Start Freq	Stop Freq	Integ BW	dBm	Lower ΔLim(dB)	Freq (Hz)	Peak dBm	Upper ΔLim(dB)	Freq (Hz)																																																										
0.0 Hz	5.625 kHz	100.0 Hz	32.02	(-1.26)	0.0	32.36	(-0.91)	50.00																																																										
5.625 kHz	12.50 kHz	100.0 Hz	-43.61	(-8.36)	-12.10 k	-43.48	(-7.50)	12.20 k																																																										
12.50 kHz	60.00 kHz	100.0 Hz	-39.26	(-19.26)	-13.15 k	-38.98	(-18.98)	13.25 k																																																										
4.000 MHz	8.000 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
8.000 MHz	12.50 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										
12.50 MHz	15.00 MHz	1.000 MHz	—	(—)	—	—	(—)	—																																																										