

FCC Test Report (WLAN)

Report No.: RF160512E02

FCC ID: AK8J20H088

Test Model: J20H088

Received Date: May 12, 2016

Test Date: May 26 to June 13, 2016

Issued Date: July 15, 2016

Applicant: Sony Corporation

Address: 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT (WLAN)	7
3.2 Description of Test Modes	25
3.2.1 Test Mode Applicability and Tested Channel Detail	26
3.3 Duty Cycle of Test Signal	28
3.4 Description of Support Units	29
3.4.1 Configuration of System under Test	29
3.5 General Description of Applied Standards	30
4 Test Types and Results	31
4.1 Radiated Emission and Bandedge Measurement	31
4.1.1 Limits of Radiated Emission and Bandedge Measurement	31
4.1.2 Test Instruments	32
4.1.3 Test Procedures	33
4.1.4 Deviation from Test Standard	33
4.1.5 Test Set Up	34
4.1.6 EUT Operating Conditions	34
4.1.7 Test Results	35
4.2 Conducted Emission Measurement	45
4.2.1 Limits of Conducted Emission Measurement	45
4.2.2 Test Instruments	45
4.2.3 Test Procedures	46
4.2.4 Deviation from Test Standard	46
4.2.5 Test Setup	46
4.2.6 EUT Operating Conditions	46
4.2.7 Test Results	47
4.3 6dB Bandwidth Measurement	49
4.3.1 Limits of 6dB Bandwidth Measurement	49
4.3.2 Test Setup	49
4.3.3 Test Instruments	49
4.3.4 Test Procedure	49
4.3.5 Deviation from Test Standard	49
4.3.6 EUT Operating Conditions	49
4.3.7 Test Result	50
4.4 Conducted Output Power Measurement	52
4.4.1 Limits of Conducted Output Power Measurement	52
4.4.2 Test Setup	52
4.4.3 Test Instruments	52
4.4.4 Test Procedures	52
4.4.5 Deviation from Test Standard	52
4.4.6 EUT Operating Conditions	52
4.4.7 Test Results	53
4.5 Power Spectral Density Measurement	55
4.5.1 Limits of Power Spectral Density Measurement	55
4.5.2 Test Setup	55
4.5.3 Test Instruments	55
4.5.4 Test Procedure	55
4.5.5 Deviation from Test Standard	55
4.5.6 EUT Operating Condition	55

4.5.7 Test Results	56
4.6 Conducted Out of Band Emission Measurement	58
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	58
4.6.2 Test Setup.....	58
4.6.3 Test Instruments	58
4.6.4 Test Procedure	58
4.6.5 Deviation from Test Standard	58
4.6.6 EUT Operating Condition	58
4.6.7 Test Results	58
5 Pictures of Test Arrangements.....	65
Appendix – Information on the Testing Laboratories	66

Release Control Record

Issue No.	Description	Date Issued
RF160512E02	Original release.	July 15, 2016

1 Certificate of Conformity

Product: WLAN/BT Module

Brand: FOXCONN

Test Model: J20H088

Sample Status: ENGINEERING SAMPLE

Applicant: Sony Corporation

Test Date: May 26 to June 13, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  _____, **Date:** July 15, 2016
Wendy Wu / Specialist

Approved by :  _____, **Date:** July 15, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.17dB at 0.50000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2387.00MHz, 4874.00MHz, 4824.00MHz, 2390.00MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.86 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.19 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.43 dB
	6GHz ~ 18GHz	3.49 dB
	18GHz ~ 40GHz	4.11 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (WLAN)

Product	WLAN/BT Module
Brand	FOXCONN
Test Model	J20H088
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps
Operating Frequency	2.4GHz: 2.412GHz ~ 2.462GHz 5GHz: 5.18GHz ~ 5.24GHz, 5.26GH ~ 5.32GHz, 5.50GHz ~ 5.70GHz, 5.745GHz ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 24 802.11n (HT40), 802.11ac (VHT40): 11 802.11ac (VHT80): 5
Output Power	2.4GHz: 788.298mW 5GHz: 5.18GHz ~ 5.24GHz 146.017mW 5.26GH ~ 5.32GHz 151.651mW 5.50GHz ~ 5.70GHz 180.181mW 5.745GHz ~ 5.825GHz 290.377mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. There are WLAN, BT technology used for the EUT.
2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	Bluetooth
2	WLAN (5GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT has two samples, which are identical to each other in all aspects except for the followings:

Model	Sample	Different
J20H088	Sample 1	with Con4/Con5 switch connector
	Sample 2	without Con4/Con5 switch connector

According to above samples, **Sample 1** was selected as representative model for the test and its data was recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

For BT used								
Item	Brand	Model	Antenna Gain(dBi) (included cable loss)	Frequency rang (GHz)	Antenna type	Connector type	Cable loss(dB)	Cable length (mm/cm)
1	FOXCONN	WDAN-S1TV0100-DH	-0.82	2.4~2.4835	PIFA	i-pex(MHF)	0.19	100mm(10cm)
2	FOXCONN	ANTS2M1-CSG02-EF	-0.84	2.4~2.4835	PIFA	i-pex(MHF)	0.21	110mm(11cm)
3	FOXCONN	ANTS2M1-CSG03-EF	-0.86	2.4~2.4835	PIFA	i-pex(MHF)	0.23	120mm(12cm)
4	FOXCONN	ANTS2M1-CSG04-EF	-0.88	2.4~2.4835	PIFA	i-pex(MHF)	0.25	130mm(13cm)
5	FOXCONN	ANTS2M1-CSG05-EF	-0.90	2.4~2.4835	PIFA	i-pex(MHF)	0.27	140mm(14cm)
6	FOXCONN	ANTS2M1-CSG06-EF	-0.92	2.4~2.4835	PIFA	i-pex(MHF)	0.29	150mm(15cm)
7	FOXCONN	ANTS2M1-CSG07-EF	-0.93	2.4~2.4835	PIFA	i-pex(MHF)	0.30	160mm(16cm)
8	FOXCONN	ANTS2M1-CSG08-EF	-0.95	2.4~2.4835	PIFA	i-pex(MHF)	0.32	170mm(17cm)
9	FOXCONN	ANTS2M1-CSG09-EF	-0.97	2.4~2.4835	PIFA	i-pex(MHF)	0.34	180mm(18cm)
10	FOXCONN	ANTS2M1-CSG10-EF	-0.99	2.4~2.4835	PIFA	i-pex(MHF)	0.36	190mm(19cm)
11	FOXCONN	ANTS2M1-CSG01-EF	-1.01	2.4~2.4835	PIFA	i-pex(MHF)	0.38	200mm(20cm)
12	FOXCONN	ANTS2M1-CSG11-EF	-1.03	2.4~2.4835	PIFA	i-pex(MHF)	0.40	210mm(21cm)
13	FOXCONN	ANTS2M1-CSG12-EF	-1.05	2.4~2.4835	PIFA	i-pex(MHF)	0.42	220mm(22cm)
14	FOXCONN	ANTS2M1-CSG13-EF	-1.07	2.4~2.4835	PIFA	i-pex(MHF)	0.44	230mm(23cm)
15	FOXCONN	ANTS2M1-CSG14-EF	-1.09	2.4~2.4835	PIFA	i-pex(MHF)	0.46	240mm(24cm)
16	FOXCONN	ANTS2M1-CSG15-EF	-1.11	2.4~2.4835	PIFA	i-pex(MHF)	0.48	250mm(25cm)
17	FOXCONN	ANTS2M1-CSG16-EF	-1.12	2.4~2.4835	PIFA	i-pex(MHF)	0.49	260mm(26cm)
18	FOXCONN	ANTS2M1-CSG17-EF	-1.14	2.4~2.4835	PIFA	i-pex(MHF)	0.51	270mm(27cm)
19	FOXCONN	ANTS2M1-CSG18-EF	-1.16	2.4~2.4835	PIFA	i-pex(MHF)	0.53	280mm(28cm)
20	FOXCONN	ANTS2M1-CSG19-EF	-1.18	2.4~2.4835	PIFA	i-pex(MHF)	0.55	290mm(29cm)
21	FOXCONN	WDAN-S1TV0300-DH	-1.20	2.4~2.4835	PIFA	i-pex(MHF)	0.57	300mm(30cm)
22	FOXCONN	WDAN-S1TV0310-DH	-1.22	2.4~2.4835	PIFA	i-pex(MHF)	0.59	310mm(31cm)
23	FOXCONN	WDAN-S1TV0320-DH	-1.24	2.4~2.4835	PIFA	i-pex(MHF)	0.61	320mm(32cm)
24	FOXCONN	WDAN-S1TV0330-DH	-1.26	2.4~2.4835	PIFA	i-pex(MHF)	0.63	330mm(33cm)
25	FOXCONN	WDAN-S1TV0340-DH	-1.28	2.4~2.4835	PIFA	i-pex(MHF)	0.65	340mm(34cm)
26	FOXCONN	WDAN-S1TV0350-DH	-1.30	2.4~2.4835	PIFA	i-pex(MHF)	0.67	350mm(35cm)

27	FOXCONN	WDAN-S1TV0360-DH	-1.31	2.4~2.4835	PIFA	i-pex(MHF)	0.68	360mm(36cm)
28	FOXCONN	WDAN-S1TV0370-DH	-1.33	2.4~2.4835	PIFA	i-pex(MHF)	0.70	370mm(37cm)
29	FOXCONN	WDAN-S1TV0380-DH	-1.35	2.4~2.4835	PIFA	i-pex(MHF)	0.72	380mm(38cm)
30	FOXCONN	WDAN-S1TV0390-DH	-1.37	2.4~2.4835	PIFA	i-pex(MHF)	0.74	390mm(39cm)
31	FOXCONN	WDAN-S1TV0400-DH	-1.39	2.4~2.4835	PIFA	i-pex(MHF)	0.76	400mm(40cm)
32	FOXCONN	WDAN-S1TV0410-DH	-1.41	2.4~2.4835	PIFA	i-pex(MHF)	0.78	410mm(41cm)
33	FOXCONN	WDAN-S1TV0420-DH	-1.43	2.4~2.4835	PIFA	i-pex(MHF)	0.80	420mm(42cm)
34	FOXCONN	WDAN-S1TV0430-DH	-1.45	2.4~2.4835	PIFA	i-pex(MHF)	0.82	430mm(43cm)
35	FOXCONN	WDAN-S1TV0440-DH	-1.47	2.4~2.4835	PIFA	i-pex(MHF)	0.84	440mm(44cm)
36	FOXCONN	WDAN-S1TV0450-DH	-1.49	2.4~2.4835	PIFA	i-pex(MHF)	0.86	450mm(45cm)
37	FOXCONN	WDAN-S1TV0460-DH	-1.50	2.4~2.4835	PIFA	i-pex(MHF)	0.87	460mm(46cm)
38	FOXCONN	WDAN-S1TV0470-DH	-1.52	2.4~2.4835	PIFA	i-pex(MHF)	0.89	470mm(47cm)
39	FOXCONN	WDAN-S1TV0480-DH	-1.54	2.4~2.4835	PIFA	i-pex(MHF)	0.91	480mm(48cm)
40	FOXCONN	WDAN-S1TV0490-DH	-1.56	2.4~2.4835	PIFA	i-pex(MHF)	0.93	490mm(49cm)
41	FOXCONN	WDAN-S1TV0500-DH	-1.58	2.4~2.4835	PIFA	i-pex(MHF)	0.95	500mm(50cm)
42	FOXCONN	WDAN-S1TV0510-DH	-1.60	2.4~2.4835	PIFA	i-pex(MHF)	0.97	510mm(51cm)
43	FOXCONN	WDAN-S1TV0520-DH	-1.62	2.4~2.4835	PIFA	i-pex(MHF)	0.99	520mm(52cm)
44	FOXCONN	WDAN-S1TV0530-DH	-1.64	2.4~2.4835	PIFA	i-pex(MHF)	1.01	530mm(53cm)
45	FOXCONN	WDAN-S1TV0540-DH	-1.66	2.4~2.4835	PIFA	i-pex(MHF)	1.03	540mm(54cm)
46	FOXCONN	WDAN-S1TV0550-DH	-1.68	2.4~2.4835	PIFA	i-pex(MHF)	1.05	550mm(55cm)
47	FOXCONN	WDAN-S1TV0560-DH	-1.69	2.4~2.4835	PIFA	i-pex(MHF)	1.06	560mm(56cm)
48	FOXCONN	WDAN-S1TV0570-DH	-1.71	2.4~2.4835	PIFA	i-pex(MHF)	1.08	570mm(57cm)
49	FOXCONN	ANTS2M1-CSG20-EF	-1.72	2.4~2.4835	PIFA	i-pex(MHF)	1.09	575mm(57.5cm)
50	FOXCONN	WDAN-S1TV0580-DH	-1.73	2.4~2.4835	PIFA	i-pex(MHF)	1.10	580mm(58cm)
51	FOXCONN	WDAN-S1TV0590-DH	-1.75	2.4~2.4835	PIFA	i-pex(MHF)	1.12	590mm(59cm)
52	FOXCONN	WDAN-S1TV0600-DH	-1.77	2.4~2.4835	PIFA	i-pex(MHF)	1.14	600mm(60cm)
53	FOXCONN	WDAN-S1TV0610-DH	-1.79	2.4~2.4835	PIFA	i-pex(MHF)	1.16	610mm(61cm)
54	FOXCONN	WDAN-S1TV0620-DH	-1.81	2.4~2.4835	PIFA	i-pex(MHF)	1.18	620mm(62cm)
55	FOXCONN	WDAN-S1TV0630-DH	-1.83	2.4~2.4835	PIFA	i-pex(MHF)	1.20	630mm(63cm)
56	FOXCONN	WDAN-S1TV0640-DH	-1.85	2.4~2.4835	PIFA	i-pex(MHF)	1.22	640mm(64cm)
57	FOXCONN	WDAN-S1TV0650-DH	-1.87	2.4~2.4835	PIFA	i-pex(MHF)	1.24	650mm(65cm)
58	FOXCONN	WDAN-S1TV0660-DH	-1.88	2.4~2.4835	PIFA	i-pex(MHF)	1.25	660mm(66cm)
59	FOXCONN	WDAN-S1TV0670-DH	-1.90	2.4~2.4835	PIFA	i-pex(MHF)	1.27	670mm(67cm)
60	FOXCONN	WDAN-S1TV0680-DH	-1.92	2.4~2.4835	PIFA	i-pex(MHF)	1.29	680mm(68cm)
61	FOXCONN	WDAN-S1TV0690-DH	-1.94	2.4~2.4835	PIFA	i-pex(MHF)	1.31	690mm(69cm)
62	FOXCONN	WDAN-S1TV0700-DH	-1.96	2.4~2.4835	PIFA	i-pex(MHF)	1.33	700mm(70cm)
63	FOXCONN	WDAN-S1TV0710-DH	-1.98	2.4~2.4835	PIFA	i-pex(MHF)	1.35	710mm(71cm)
64	FOXCONN	WDAN-S1TV0720-DH	-2.00	2.4~2.4835	PIFA	i-pex(MHF)	1.37	720mm(72cm)
65	FOXCONN	WDAN-S1TV0730-DH	-2.02	2.4~2.4835	PIFA	i-pex(MHF)	1.39	730mm(73cm)
66	FOXCONN	WDAN-S1TV0740-DH	-2.04	2.4~2.4835	PIFA	i-pex(MHF)	1.41	740mm(74cm)
67	FOXCONN	WDAN-S1TV0750-DH	-2.06	2.4~2.4835	PIFA	i-pex(MHF)	1.43	750mm(75cm)
68	FOXCONN	WDAN-S1TV0760-DH	-2.07	2.4~2.4835	PIFA	i-pex(MHF)	1.44	760mm(76cm)

69	FOXCONN	WDAN-S1TV0770-DH	-2.09	2.4~2.4835	PIFA	i-pex(MHF)	1.46	770mm(77cm)
70	FOXCONN	WDAN-S1TV0780-DH	-2.11	2.4~2.4835	PIFA	i-pex(MHF)	1.48	780mm(78cm)
71	FOXCONN	WDAN-S1TV0790-DH	-2.13	2.4~2.4835	PIFA	i-pex(MHF)	1.50	790mm(79cm)
72	FOXCONN	WDAN-S1TV0800-DH	-2.15	2.4~2.4835	PIFA	i-pex(MHF)	1.52	800mm(80cm)
73	FOXCONN	WDAN-S1TV0810-DH	-2.17	2.4~2.4835	PIFA	i-pex(MHF)	1.54	810mm(81cm)
74	FOXCONN	WDAN-S1TV0820-DH	-2.19	2.4~2.4835	PIFA	i-pex(MHF)	1.56	820mm(82cm)
75	FOXCONN	WDAN-S1TV0830-DH	-2.21	2.4~2.4835	PIFA	i-pex(MHF)	1.58	830mm(83cm)
76	FOXCONN	WDAN-S1TV0840-DH	-2.23	2.4~2.4835	PIFA	i-pex(MHF)	1.60	840mm(84cm)
77	FOXCONN	WDAN-S1TV0850-DH	-2.25	2.4~2.4835	PIFA	i-pex(MHF)	1.62	850mm(85cm)
78	FOXCONN	WDAN-S1TV0860-DH	-2.26	2.4~2.4835	PIFA	i-pex(MHF)	1.63	860mm(86cm)
79	FOXCONN	WDAN-S1TV0870-DH	-2.28	2.4~2.4835	PIFA	i-pex(MHF)	1.65	870mm(87cm)
80	FOXCONN	WDAN-S1TV0880-DH	-2.30	2.4~2.4835	PIFA	i-pex(MHF)	1.67	880mm(88cm)
81	FOXCONN	WDAN-S1TV0890-DH	-2.32	2.4~2.4835	PIFA	i-pex(MHF)	1.69	890mm(89cm)
82	FOXCONN	WDAN-S1TV0900-DH	-2.34	2.4~2.4835	PIFA	i-pex(MHF)	1.71	900mm(90cm)
83	FOXCONN	WDAN-S1TV0910-DH	-2.36	2.4~2.4835	PIFA	i-pex(MHF)	1.73	910mm(91cm)
84	FOXCONN	WDAN-S1TV0920-DH	-2.38	2.4~2.4835	PIFA	i-pex(MHF)	1.75	920mm(92cm)
85	FOXCONN	WDAN-S1TV0930-DH	-2.40	2.4~2.4835	PIFA	i-pex(MHF)	1.77	930mm(93cm)
86	FOXCONN	WDAN-S1TV0940-DH	-2.42	2.4~2.4835	PIFA	i-pex(MHF)	1.79	940mm(94cm)
87	FOXCONN	WDAN-S1TV0950-DH	-2.44	2.4~2.4835	PIFA	i-pex(MHF)	1.81	950mm(95cm)
88	FOXCONN	WDAN-S1TV0960-DH	-2.45	2.4~2.4835	PIFA	i-pex(MHF)	1.82	960mm(96cm)
89	FOXCONN	WDAN-S1TV0970-DH	-2.47	2.4~2.4835	PIFA	i-pex(MHF)	1.84	970mm(97cm)
90	FOXCONN	WDAN-S1TV0980-DH	-2.49	2.4~2.4835	PIFA	i-pex(MHF)	1.86	980mm(98cm)
91	FOXCONN	WDAN-S1TV0990-DH	-2.51	2.4~2.4835	PIFA	i-pex(MHF)	1.88	990mm(99cm)
92	FOXCONN	WDAN-S1TV1000-DH	-2.53	2.4~2.4835	PIFA	i-pex(MHF)	1.90	1000mm(100cm)
93	FOXCONN	WDAN-S1TV1010-DH	-2.55	2.4~2.4835	PIFA	i-pex(MHF)	1.92	1010mm(101cm)
94	FOXCONN	WDAN-S1TV1020-DH	-2.57	2.4~2.4835	PIFA	i-pex(MHF)	1.94	1020mm(102cm)
95	FOXCONN	WDAN-S1TV1030-DH	-2.59	2.4~2.4835	PIFA	i-pex(MHF)	1.96	1030mm(103cm)
96	FOXCONN	WDAN-S1TV1040-DH	-2.61	2.4~2.4835	PIFA	i-pex(MHF)	1.98	1040mm(104cm)
97	FOXCONN	WDAN-S1TV1050-DH	-2.63	2.4~2.4835	PIFA	i-pex(MHF)	2.00	1050mm(105cm)
98	FOXCONN	WDAN-S1TV1060-DH	-2.64	2.4~2.4835	PIFA	i-pex(MHF)	2.01	1060mm(106cm)
99	FOXCONN	WDAN-S1TV1070-DH	-2.66	2.4~2.4835	PIFA	i-pex(MHF)	2.03	1070mm(107cm)
100	FOXCONN	WDAN-S1TV1080-DH	-2.68	2.4~2.4835	PIFA	i-pex(MHF)	2.05	1080mm(108cm)
101	FOXCONN	WDAN-S1TV1090-DH	-2.70	2.4~2.4835	PIFA	i-pex(MHF)	2.07	1090mm(109cm)
102	FOXCONN	WDAN-S1TV1100-DH	-2.72	2.4~2.4835	PIFA	i-pex(MHF)	2.09	1100mm(110cm)
103	FOXCONN	WDAN-S1TV1110-DH	-2.74	2.4~2.4835	PIFA	i-pex(MHF)	2.11	1110mm(111cm)
104	FOXCONN	WDAN-S1TV1120-DH	-2.76	2.4~2.4835	PIFA	i-pex(MHF)	2.13	1120mm(112cm)

105	FOXCONN	WDAN-S1TV1130-DH	-2.78	2.4~2.4835	PIFA	i-pex(MHF)	2.15	1130mm(113cm)
106	FOXCONN	WDAN-S1TV1140-DH	-2.80	2.4~2.4835	PIFA	i-pex(MHF)	2.17	1140mm(114cm)
107	FOXCONN	WDAN-S1TV1150-DH	-2.82	2.4~2.4835	PIFA	i-pex(MHF)	2.19	1150mm(115cm)
108	FOXCONN	WDAN-S1TV1160-DH	-2.83	2.4~2.4835	PIFA	i-pex(MHF)	2.20	1160mm(116cm)
109	FOXCONN	WDAN-S1TV1170-DH	-2.85	2.4~2.4835	PIFA	i-pex(MHF)	2.22	1170mm(117cm)
110	FOXCONN	WDAN-S1TV1180-DH	-2.87	2.4~2.4835	PIFA	i-pex(MHF)	2.24	1180mm(118cm)
111	FOXCONN	WDAN-S1TV1190-DH	-2.89	2.4~2.4835	PIFA	i-pex(MHF)	2.26	1190mm(119cm)
112	FOXCONN	WDAN-S1TV1200-DH	-2.91	2.4~2.4835	PIFA	i-pex(MHF)	2.28	1200mm(120cm)
113	FOXCONN	WDAN-S1TV1210-DH	-2.93	2.4~2.4835	PIFA	i-pex(MHF)	2.30	1210mm(121cm)
114	FOXCONN	WDAN-S1TV1220-DH	-2.95	2.4~2.4835	PIFA	i-pex(MHF)	2.32	1220mm(122cm)
115	FOXCONN	WDAN-S1TV1230-DH	-2.97	2.4~2.4835	PIFA	i-pex(MHF)	2.34	1230mm(123cm)
116	FOXCONN	WDAN-S1TV1240-DH	-2.99	2.4~2.4835	PIFA	i-pex(MHF)	2.36	1240mm(124cm)
117	FOXCONN	WDAN-S1TV1250-DH	-3.01	2.4~2.4835	PIFA	i-pex(MHF)	2.38	1250mm(125cm)
118	FOXCONN	WDAN-S1TV1260-DH	-3.02	2.4~2.4835	PIFA	i-pex(MHF)	2.39	1260mm(126cm)
119	FOXCONN	WDAN-S1TV1270-DH	-3.04	2.4~2.4835	PIFA	i-pex(MHF)	2.41	1270mm(127cm)
120	FOXCONN	WDAN-S1TV1280-DH	-3.06	2.4~2.4835	PIFA	i-pex(MHF)	2.43	1280mm(128cm)
121	FOXCONN	WDAN-S1TV1290-DH	-3.08	2.4~2.4835	PIFA	i-pex(MHF)	2.45	1290mm(129cm)
122	FOXCONN	WDAN-S1TV1300-DH	-3.10	2.4~2.4835	PIFA	i-pex(MHF)	2.47	1300mm(130cm)
123	FOXCONN	WDAN-S1TV1310-DH	-3.12	2.4~2.4835	PIFA	i-pex(MHF)	2.49	1310mm(131cm)
124	FOXCONN	WDAN-S1TV1320-DH	-3.14	2.4~2.4835	PIFA	i-pex(MHF)	2.51	1320mm(132cm)
125	FOXCONN	WDAN-S1TV1330-DH	-3.16	2.4~2.4835	PIFA	i-pex(MHF)	2.53	1330mm(133cm)
126	FOXCONN	WDAN-S1TV1340-DH	-3.18	2.4~2.4835	PIFA	i-pex(MHF)	2.55	1340mm(134cm)
127	FOXCONN	WDAN-S1TV1350-DH	-3.20	2.4~2.4835	PIFA	i-pex(MHF)	2.57	1350mm(135cm)
128	FOXCONN	WDAN-S1TV1360-DH	-3.21	2.4~2.4835	PIFA	i-pex(MHF)	2.58	1360mm(136cm)
129	FOXCONN	WDAN-S1TV1370-DH	-3.23	2.4~2.4835	PIFA	i-pex(MHF)	2.60	1370mm(137cm)
130	FOXCONN	WDAN-S1TV1380-DH	-3.25	2.4~2.4835	PIFA	i-pex(MHF)	2.62	1380mm(138cm)
131	FOXCONN	WDAN-S1TV1390-DH	-3.27	2.4~2.4835	PIFA	i-pex(MHF)	2.64	1390mm(139cm)
132	FOXCONN	WDAN-S1TV1400-DH	-3.29	2.4~2.4835	PIFA	i-pex(MHF)	2.66	1400mm(140cm)

133	FOXCONN	WDAN-S1TV1410-DH	-3.31	2.4~2.4835	PIFA	i-pex(MHF)	2.68	1410mm(141c m)
134	FOXCONN	WDAN-S1TV1420-DH	-3.33	2.4~2.4835	PIFA	i-pex(MHF)	2.70	1420mm(142c m)
135	FOXCONN	WDAN-S1TV1430-DH	-3.35	2.4~2.4835	PIFA	i-pex(MHF)	2.72	1430mm(143c m)
136	FOXCONN	WDAN-S1TV1440-DH	-3.37	2.4~2.4835	PIFA	i-pex(MHF)	2.74	1440mm(144c m)
137	FOXCONN	WDAN-S1TV1450-DH	-3.39	2.4~2.4835	PIFA	i-pex(MHF)	2.76	1450mm(145c m)
138	FOXCONN	WDAN-S1TV1460-DH	-3.40	2.4~2.4835	PIFA	i-pex(MHF)	2.77	1460mm(146c m)
139	FOXCONN	WDAN-S1TV1470-DH	-3.42	2.4~2.4835	PIFA	i-pex(MHF)	2.79	1470mm(147c m)
140	FOXCONN	WDAN-S1TV1480-DH	-3.44	2.4~2.4835	PIFA	i-pex(MHF)	2.81	1480mm(148c m)
141	FOXCONN	WDAN-S1TV1490-DH	-3.46	2.4~2.4835	PIFA	i-pex(MHF)	2.83	1490mm(149c m)
142	FOXCONN	WDAN-S1TV1500-DH	-3.48	2.4~2.4835	PIFA	i-pex(MHF)	2.85	1500mm(150c m)
143	FOXCONN	WDAN-S1TV1510-DH	-3.50	2.4~2.4835	PIFA	i-pex(MHF)	2.87	1510mm(151c m)
144	FOXCONN	WDAN-S1TV1520-DH	-3.52	2.4~2.4835	PIFA	i-pex(MHF)	2.89	1520mm(152c m)
145	FOXCONN	WDAN-S1TV1530-DH	-3.54	2.4~2.4835	PIFA	i-pex(MHF)	2.91	1530mm(153c m)
146	FOXCONN	WDAN-S1TV1540-DH	-3.56	2.4~2.4835	PIFA	i-pex(MHF)	2.93	1540mm(154c m)
147	FOXCONN	WDAN-S1TV1550-DH	-3.58	2.4~2.4835	PIFA	i-pex(MHF)	2.95	1550mm(155c m)
148	FOXCONN	WDAN-S1TV1560-DH	-3.59	2.4~2.4835	PIFA	i-pex(MHF)	2.96	1560mm(156c m)
149	FOXCONN	WDAN-S1TV1570-DH	-3.61	2.4~2.4835	PIFA	i-pex(MHF)	2.98	1570mm(157c m)
150	FOXCONN	WDAN-S1TV1580-DH	-3.63	2.4~2.4835	PIFA	i-pex(MHF)	3.00	1580mm(158c m)
151	FOXCONN	WDAN-S1TV1590-DH	-3.65	2.4~2.4835	PIFA	i-pex(MHF)	3.02	1590mm(159c m)
152	FOXCONN	WDAN-S1TV1600-DH	-3.67	2.4~2.4835	PIFA	i-pex(MHF)	3.04	1600mm(160c m)
153	FOXCONN	WDAN-S1TV1610-DH	-3.69	2.4~2.4835	PIFA	i-pex(MHF)	3.06	1610mm(161c m)
154	FOXCONN	WDAN-S1TV1620-DH	-3.71	2.4~2.4835	PIFA	i-pex(MHF)	3.08	1620mm(162c m)
155	FOXCONN	WDAN-S1TV1630-DH	-3.73	2.4~2.4835	PIFA	i-pex(MHF)	3.10	1630mm(163c m)
156	FOXCONN	WDAN-S1TV1640-DH	-3.75	2.4~2.4835	PIFA	i-pex(MHF)	3.12	1640mm(164c m)
157	FOXCONN	WDAN-S1TV1650-DH	-3.77	2.4~2.4835	PIFA	i-pex(MHF)	3.14	1650mm(165c m)
158	FOXCONN	WDAN-S1TV1660-DH	-3.78	2.4~2.4835	PIFA	i-pex(MHF)	3.15	1660mm(166c m)
159	FOXCONN	WDAN-S1TV1670-DH	-3.80	2.4~2.4835	PIFA	i-pex(MHF)	3.17	1670mm(167c m)
160	FOXCONN	WDAN-S1TV1680-DH	-3.82	2.4~2.4835	PIFA	i-pex(MHF)	3.19	1680mm(168c m)

161	FOXCONN	WDAN-S1TV1690-DH	-3.84	2.4~2.4835	PIFA	i-pex(MHF)	3.21	1690mm(169cm)
162	FOXCONN	WDAN-S1TV1700-DH	-3.86	2.4~2.4835	PIFA	i-pex(MHF)	3.23	1700mm(170cm)
163	FOXCONN	WDAN-S1TV1710-DH	-3.88	2.4~2.4835	PIFA	i-pex(MHF)	3.25	1710mm(171cm)
164	FOXCONN	WDAN-S1TV1720-DH	-3.90	2.4~2.4835	PIFA	i-pex(MHF)	3.27	1720mm(172cm)
165	FOXCONN	WDAN-S1TV1730-DH	-3.92	2.4~2.4835	PIFA	i-pex(MHF)	3.29	1730mm(173cm)
166	FOXCONN	WDAN-S1TV1740-DH	-3.94	2.4~2.4835	PIFA	i-pex(MHF)	3.31	1740mm(174cm)
167	FOXCONN	WDAN-S1TV1750-DH	-3.96	2.4~2.4835	PIFA	i-pex(MHF)	3.33	1750mm(175cm)
168	FOXCONN	WDAN-S1TV1760-DH	-3.97	2.4~2.4835	PIFA	i-pex(MHF)	3.34	1760mm(176cm)
169	FOXCONN	WDAN-S1TV1770-DH	-3.99	2.4~2.4835	PIFA	i-pex(MHF)	3.36	1770mm(177cm)
170	FOXCONN	WDAN-S1TV1780-DH	-4.01	2.4~2.4835	PIFA	i-pex(MHF)	3.38	1780mm(178cm)
171	FOXCONN	WDAN-S1TV1790-DH	-4.03	2.4~2.4835	PIFA	i-pex(MHF)	3.40	1790mm(179cm)
172	FOXCONN	WDAN-S1TV1800-DH	-4.05	2.4~2.4835	PIFA	i-pex(MHF)	3.42	1800mm(180cm)
173	FOXCONN	WDAN-S1TV2000-DH	-4.43	2.4~2.4835	PIFA	i-pex(MHF)	3.80	2000mm(200cm)
174	FOXCONN	ANTS2M1-CSG50-EF	2.58	2.4~2.4835	PIFA	i-pex(MHF)	0.25	100mm(10cm)
175	FOXCONN	ANTS2M1-CSG51-EF	2.55	2.4~2.4835	PIFA	i-pex(MHF)	0.28	110mm(11cm)
176	FOXCONN	ANTS2M1-CSG52-EF	2.53	2.4~2.4835	PIFA	i-pex(MHF)	0.31	120mm(12cm)
177	FOXCONN	ANTS2M1-CSG53-EF	2.50	2.4~2.4835	PIFA	i-pex(MHF)	0.33	130mm(13cm)
178	FOXCONN	ANTS2M1-CSG54-EF	2.48	2.4~2.4835	PIFA	i-pex(MHF)	0.36	140mm(14cm)
179	FOXCONN	ANTS2M1-CSG55-EF	2.45	2.4~2.4835	PIFA	i-pex(MHF)	0.38	150mm(15cm)
180	FOXCONN	ANTS2M1-CSG56-EF	2.43	2.4~2.4835	PIFA	i-pex(MHF)	0.41	160mm(16cm)
181	FOXCONN	ANTS2M1-CSG57-EF	2.40	2.4~2.4835	PIFA	i-pex(MHF)	0.43	170mm(17cm)
182	FOXCONN	ANTS2M1-CSG58-EF	2.38	2.4~2.4835	PIFA	i-pex(MHF)	0.46	180mm(18cm)
183	FOXCONN	ANTS2M1-CSG59-EF	2.35	2.4~2.4835	PIFA	i-pex(MHF)	0.48	190mm(19cm)
184	FOXCONN	ANTS2M1-CSG60-EF	2.33	2.4~2.4835	PIFA	i-pex(MHF)	0.51	200mm(20cm)
185	FOXCONN	ANTS2M1-CSG61-EF	2.30	2.4~2.4835	PIFA	i-pex(MHF)	0.53	210mm(21cm)
186	FOXCONN	ANTS2M1-CSG62-EF	2.27	2.4~2.4835	PIFA	i-pex(MHF)	0.56	220mm(22cm)
187	FOXCONN	ANTS2M1-CSG63-EF	2.25	2.4~2.4835	PIFA	i-pex(MHF)	0.58	230mm(23cm)
188	FOXCONN	ANTS2M1-CSG64-EF	2.22	2.4~2.4835	PIFA	i-pex(MHF)	0.61	240mm(24cm)
189	FOXCONN	ANTS2M1-CSG65-EF	2.20	2.4~2.4835	PIFA	i-pex(MHF)	0.64	250mm(25cm)
190	FOXCONN	ANTS2M1-CSG66-EF	2.17	2.4~2.4835	PIFA	i-pex(MHF)	0.66	260mm(26cm)
191	FOXCONN	ANTS2M1-CSG67-EF	2.15	2.4~2.4835	PIFA	i-pex(MHF)	0.69	270mm(27cm)
192	FOXCONN	ANTS2M1-CSG68-EF	2.12	2.4~2.4835	PIFA	i-pex(MHF)	0.71	280mm(28cm)
193	FOXCONN	ANTS2M1-CSG69-EF	2.10	2.4~2.4835	PIFA	i-pex(MHF)	0.74	290mm(29cm)
194	FOXCONN	ANTS2M1-CSG70-EF	2.07	2.4~2.4835	PIFA	i-pex(MHF)	0.76	300mm(30cm)
195	FOXCONN	ANTS2M1-CSG71-EF	2.05	2.4~2.4835	PIFA	i-pex(MHF)	0.79	310mm(31cm)
196	FOXCONN	ANTS2M1-CSG72-EF	2.02	2.4~2.4835	PIFA	i-pex(MHF)	0.81	320mm(32cm)

197	FOXCONN	ANTS2M1-CSG73-EF	2.00	2.4~2.4835	PIFA	i-pex(MHF)	0.84	330mm(33cm)
198	FOXCONN	ANTS2M1-CSG74-EF	1.97	2.4~2.4835	PIFA	i-pex(MHF)	0.86	340mm(34cm)
199	FOXCONN	ANTS2M1-CSG75-EF	1.94	2.4~2.4835	PIFA	i-pex(MHF)	0.89	350mm(35cm)
200	FOXCONN	ANTS2M1-CSG76-EF	1.92	2.4~2.4835	PIFA	i-pex(MHF)	0.92	360mm(36cm)
201	FOXCONN	ANTS2M1-CSG77-EF	1.89	2.4~2.4835	PIFA	i-pex(MHF)	0.94	370mm(37cm)
202	FOXCONN	ANTS2M1-CSG78-EF	1.87	2.4~2.4835	PIFA	i-pex(MHF)	0.97	380mm(38cm)
203	FOXCONN	ANTS2M1-CSG79-EF	1.84	2.4~2.4835	PIFA	i-pex(MHF)	0.99	390mm(39cm)
204	FOXCONN	ANTS2M1-CSG80-EF	1.82	2.4~2.4835	PIFA	i-pex(MHF)	1.02	400mm(40cm)
205	FOXCONN	ANTS2M1-CSG81-EF	1.79	2.4~2.4835	PIFA	i-pex(MHF)	1.04	410mm(41cm)
206	FOXCONN	ANTS2M1-CSG82-EF	1.77	2.4~2.4835	PIFA	i-pex(MHF)	1.07	420mm(42cm)
207	FOXCONN	ANTS2M1-CSG83-EF	1.74	2.4~2.4835	PIFA	i-pex(MHF)	1.09	430mm(43cm)
208	FOXCONN	ANTS2M1-CSG84-EF	1.72	2.4~2.4835	PIFA	i-pex(MHF)	1.12	440mm(44cm)
209	FOXCONN	ANTS2M1-CSG85-EF	1.69	2.4~2.4835	PIFA	i-pex(MHF)	1.14	450mm(45cm)
210	FOXCONN	ANTS2M1-CSG86-EF	1.66	2.4~2.4835	PIFA	i-pex(MHF)	1.17	460mm(46cm)
211	FOXCONN	ANTS2M1-CSG87-EF	1.64	2.4~2.4835	PIFA	i-pex(MHF)	1.19	470mm(47cm)
212	FOXCONN	ANTS2M1-CSG88-EF	1.61	2.4~2.4835	PIFA	i-pex(MHF)	1.22	480mm(48cm)
213	FOXCONN	ANTS2M1-CSG89-EF	1.59	2.4~2.4835	PIFA	i-pex(MHF)	1.25	490mm(49cm)
214	FOXCONN	ANTS2M1-CSG90-EF	1.56	2.4~2.4835	PIFA	i-pex(MHF)	1.27	500mm(50cm)
215	FOXCONN	ANTS2M1-CSG91-EF	1.54	2.4~2.4835	PIFA	i-pex(MHF)	1.30	510mm(51cm)
216	FOXCONN	ANTS2M1-CSG92-EF	1.51	2.4~2.4835	PIFA	i-pex(MHF)	1.32	520mm(52cm)
217	FOXCONN	ANTS2M1-CSG93-EF	1.49	2.4~2.4835	PIFA	i-pex(MHF)	1.35	530mm(53cm)
218	FOXCONN	ANTS2M1-CSG94-EF	1.46	2.4~2.4835	PIFA	i-pex(MHF)	1.37	540mm(54cm)
219	FOXCONN	ANTS2M1-CSG95-EF	1.44	2.4~2.4835	PIFA	i-pex(MHF)	1.40	550mm(55cm)
220	FOXCONN	ANTS2M1-CSG96-EF	1.41	2.4~2.4835	PIFA	i-pex(MHF)	1.42	560mm(56cm)
221	FOXCONN	ANTS2M1-CSG97-EF	1.39	2.4~2.4835	PIFA	i-pex(MHF)	1.45	570mm(57cm)
222	FOXCONN	ANTS2M1-CSG98-EF	1.37	2.4~2.4835	PIFA	i-pex(MHF)	1.46	575mm(57.5cm)
223	FOXCONN	ANTS2M1-CSG99-EF	1.36	2.4~2.4835	PIFA	i-pex(MHF)	1.47	580mm(58cm)
224	FOXCONN	ANTS2M1-CSGA0-EF	1.33	2.4~2.4835	PIFA	i-pex(MHF)	1.50	590mm(59cm)
225	FOXCONN	ANTS2M1-CSGA1-EF	1.31	2.4~2.4835	PIFA	i-pex(MHF)	1.53	600mm(60cm)
226	FOXCONN	ANTS2M1-CSGA2-EF	1.28	2.4~2.4835	PIFA	i-pex(MHF)	1.55	610mm(61cm)
227	FOXCONN	ANTS2M1-CSGA3-EF	1.26	2.4~2.4835	PIFA	i-pex(MHF)	1.58	620mm(62cm)
228	FOXCONN	ANTS2M1-CSGA4-EF	1.23	2.4~2.4835	PIFA	i-pex(MHF)	1.60	630mm(63cm)
229	FOXCONN	ANTS2M1-CSGA5-EF	1.21	2.4~2.4835	PIFA	i-pex(MHF)	1.63	640mm(64cm)
230	FOXCONN	ANTS2M1-CSGA6-EF	1.18	2.4~2.4835	PIFA	i-pex(MHF)	1.65	650mm(65cm)
231	FOXCONN	ANTS2M1-CSGA7-EF	1.16	2.4~2.4835	PIFA	i-pex(MHF)	1.68	660mm(66cm)
232	FOXCONN	ANTS2M1-CSGA8-EF	1.13	2.4~2.4835	PIFA	i-pex(MHF)	1.70	670mm(67cm)
233	FOXCONN	ANTS2M1-CSGA9-EF	1.11	2.4~2.4835	PIFA	i-pex(MHF)	1.73	680mm(68cm)
234	FOXCONN	ANTS2M1-CSGB0-EF	1.08	2.4~2.4835	PIFA	i-pex(MHF)	1.75	690mm(69cm)
235	FOXCONN	ANTS2M1-CSGB1-EF	1.05	2.4~2.4835	PIFA	i-pex(MHF)	1.78	700mm(70cm)
236	FOXCONN	ANTS2M1-CSGB2-EF	1.03	2.4~2.4835	PIFA	i-pex(MHF)	1.80	710mm(71cm)
237	FOXCONN	ANTS2M1-CSGB3-EF	1.00	2.4~2.4835	PIFA	i-pex(MHF)	1.83	720mm(72cm)
238	FOXCONN	ANTS2M1-CSGB4-EF	0.98	2.4~2.4835	PIFA	i-pex(MHF)	1.86	730mm(73cm)

239	FOXCONN	ANTS2M1-CSGB5-EF	0.95	2.4~2.4835	PIFA	i-pex(MHF)	1.88	740mm(74cm)
240	FOXCONN	ANTS2M1-CSGB6-EF	0.93	2.4~2.4835	PIFA	i-pex(MHF)	1.91	750mm(75cm)
241	FOXCONN	ANTS2M1-CSGB7-EF	0.90	2.4~2.4835	PIFA	i-pex(MHF)	1.93	760mm(76cm)
242	FOXCONN	ANTS2M1-CSGB8-EF	0.88	2.4~2.4835	PIFA	i-pex(MHF)	1.96	770mm(77cm)
243	FOXCONN	ANTS2M1-CSGB9-EF	0.85	2.4~2.4835	PIFA	i-pex(MHF)	1.98	780mm(78cm)
244	FOXCONN	ANTS2M1-CSGC0-EF	0.83	2.4~2.4835	PIFA	i-pex(MHF)	2.01	790mm(79cm)
245	FOXCONN	ANTS2M1-CSGC1-EF	0.80	2.4~2.4835	PIFA	i-pex(MHF)	2.03	800mm(80cm)
246	FOXCONN	ANTS2M1-CSGC2-EF	0.78	2.4~2.4835	PIFA	i-pex(MHF)	2.06	810mm(81cm)
247	FOXCONN	ANTS2M1-CSGC3-EF	0.75	2.4~2.4835	PIFA	i-pex(MHF)	2.08	820mm(82cm)
248	FOXCONN	ANTS2M1-CSGC4-EF	0.72	2.4~2.4835	PIFA	i-pex(MHF)	2.11	830mm(83cm)
249	FOXCONN	ANTS2M1-CSGC5-EF	0.70	2.4~2.4835	PIFA	i-pex(MHF)	2.14	840mm(84cm)
250	FOXCONN	ANTS2M1-CSGC6-EF	0.67	2.4~2.4835	PIFA	i-pex(MHF)	2.16	850mm(85cm)
251	FOXCONN	ANTS2M1-CSGC7-EF	0.65	2.4~2.4835	PIFA	i-pex(MHF)	2.19	860mm(86cm)
252	FOXCONN	ANTS2M1-CSGC8-EF	0.62	2.4~2.4835	PIFA	i-pex(MHF)	2.21	870mm(87cm)
253	FOXCONN	ANTS2M1-CSGC9-EF	0.60	2.4~2.4835	PIFA	i-pex(MHF)	2.24	880mm(88cm)
254	FOXCONN	ANTS2M1-CSGD0-EF	0.57	2.4~2.4835	PIFA	i-pex(MHF)	2.26	890mm(89cm)
255	FOXCONN	ANTS2M1-CSGD1-EF	0.55	2.4~2.4835	PIFA	i-pex(MHF)	2.29	900mm(90cm)
256	FOXCONN	ANTS2M1-CSGD2-EF	0.52	2.4~2.4835	PIFA	i-pex(MHF)	2.31	910mm(91cm)
257	FOXCONN	ANTS2M1-CSGD3-EF	0.50	2.4~2.4835	PIFA	i-pex(MHF)	2.34	920mm(92cm)
258	FOXCONN	ANTS2M1-CSGD4-EF	0.47	2.4~2.4835	PIFA	i-pex(MHF)	2.36	930mm(93cm)
259	FOXCONN	ANTS2M1-CSGD5-EF	0.44	2.4~2.4835	PIFA	i-pex(MHF)	2.39	940mm(94cm)
260	FOXCONN	ANTS2M1-CSGD6-EF	0.42	2.4~2.4835	PIFA	i-pex(MHF)	2.42	950mm(95cm)
261	FOXCONN	ANTS2M1-CSGD7-EF	0.39	2.4~2.4835	PIFA	i-pex(MHF)	2.44	960mm(96cm)
262	FOXCONN	ANTS2M1-CSGD8-EF	0.37	2.4~2.4835	PIFA	i-pex(MHF)	2.47	970mm(97cm)
263	FOXCONN	ANTS2M1-CSGD9-EF	0.34	2.4~2.4835	PIFA	i-pex(MHF)	2.49	980mm(98cm)
264	FOXCONN	ANTS2M1-CSGE0-EF	0.32	2.4~2.4835	PIFA	i-pex(MHF)	2.52	990mm(99cm)
265	FOXCONN	ANTS2M1-CSGE1-EF	0.29	2.4~2.4835	PIFA	i-pex(MHF)	2.54	1000mm(100cm)
266	FOXCONN	ANTS2M1-CSGE2-EF	0.27	2.4~2.4835	PIFA	i-pex(MHF)	2.57	1010mm(101cm)
267	FOXCONN	ANTS2M1-CSGE3-EF	0.24	2.4~2.4835	PIFA	i-pex(MHF)	2.59	1020mm(102cm)
268	FOXCONN	ANTS2M1-CSGE4-EF	0.22	2.4~2.4835	PIFA	i-pex(MHF)	2.62	1030mm(103cm)
269	FOXCONN	ANTS2M1-CSGE5-EF	0.19	2.4~2.4835	PIFA	i-pex(MHF)	2.64	1040mm(104cm)
270	FOXCONN	ANTS2M1-CSGE6-EF	0.17	2.4~2.4835	PIFA	i-pex(MHF)	2.67	1050mm(105cm)
271	FOXCONN	ANTS2M1-CSGE7-EF	0.14	2.4~2.4835	PIFA	i-pex(MHF)	2.69	1060mm(106cm)
272	FOXCONN	ANTS2M1-CSGE8-EF	0.11	2.4~2.4835	PIFA	i-pex(MHF)	2.72	1070mm(107cm)
273	FOXCONN	ANTS2M1-CSGE9-EF	0.09	2.4~2.4835	PIFA	i-pex(MHF)	2.75	1080mm(108cm)
274	FOXCONN	ANTS2M1-CSGF0-EF	0.06	2.4~2.4835	PIFA	i-pex(MHF)	2.77	1090mm(109cm)
275	FOXCONN	ANTS2M1-CSGF1-EF	0.04	2.4~2.4835	PIFA	i-pex(MHF)	2.80	1100mm(110cm)

276	FOXCONN	ANTS2M1-CSGF2-EF	0.01	2.4~2.4835	PIFA	i-pex(MHF)	2.82	1110mm(111cm)
277	FOXCONN	ANTS2M1-CSGF3-EF	-0.01	2.4~2.4835	PIFA	i-pex(MHF)	2.85	1120mm(112cm)
278	FOXCONN	ANTS2M1-CSGF4-EF	-0.04	2.4~2.4835	PIFA	i-pex(MHF)	2.87	1130mm(113cm)
279	FOXCONN	ANTS2M1-CSGF5-EF	-0.06	2.4~2.4835	PIFA	i-pex(MHF)	2.90	1140mm(114cm)
280	FOXCONN	ANTS2M1-CSGF6-EF	-0.09	2.4~2.4835	PIFA	i-pex(MHF)	2.92	1150mm(115cm)
281	FOXCONN	ANTS2M1-CSGF7-EF	-0.11	2.4~2.4835	PIFA	i-pex(MHF)	2.95	1160mm(116cm)
282	FOXCONN	ANTS2M1-CSGF8-EF	-0.14	2.4~2.4835	PIFA	i-pex(MHF)	2.97	1170mm(117cm)
283	FOXCONN	ANTS2M1-CSGF9-EF	-0.17	2.4~2.4835	PIFA	i-pex(MHF)	3.00	1180mm(118cm)
284	FOXCONN	ANTS2M1-CSGG0-EF	-0.19	2.4~2.4835	PIFA	i-pex(MHF)	3.03	1190mm(119cm)
285	FOXCONN	ANTS2M1-CSGG1-EF	-0.22	2.4~2.4835	PIFA	i-pex(MHF)	3.05	1200mm(120cm)
286	FOXCONN	ANTS2M1-CSGG2-EF	-0.24	2.4~2.4835	PIFA	i-pex(MHF)	3.08	1210mm(121cm)
287	FOXCONN	ANTS2M1-CSGG3-EF	-0.27	2.4~2.4835	PIFA	i-pex(MHF)	3.10	1220mm(122cm)
288	FOXCONN	ANTS2M1-CSGG4-EF	-0.29	2.4~2.4835	PIFA	i-pex(MHF)	3.13	1230mm(123cm)
289	FOXCONN	ANTS2M1-CSGG5-EF	-0.32	2.4~2.4835	PIFA	i-pex(MHF)	3.15	1240mm(124cm)
290	FOXCONN	ANTS2M1-CSGG6-EF	-0.34	2.4~2.4835	PIFA	i-pex(MHF)	3.18	1250mm(125cm)
291	FOXCONN	ANTS2M1-CSGG7-EF	-0.37	2.4~2.4835	PIFA	i-pex(MHF)	3.20	1260mm(126cm)
292	FOXCONN	ANTS2M1-CSGG8-EF	-0.39	2.4~2.4835	PIFA	i-pex(MHF)	3.23	1270mm(127cm)
293	FOXCONN	ANTS2M1-CSGG9-EF	-0.42	2.4~2.4835	PIFA	i-pex(MHF)	3.25	1280mm(128cm)
294	FOXCONN	ANTS2M1-CSGH0-EF	-0.45	2.4~2.4835	PIFA	i-pex(MHF)	3.28	1290mm(129cm)
295	FOXCONN	ANTS2M1-CSGH1-EF	-0.47	2.4~2.4835	PIFA	i-pex(MHF)	3.30	1300mm(130cm)
296	FOXCONN	ANTS2M1-CSGH2-EF	-0.50	2.4~2.4835	PIFA	i-pex(MHF)	3.33	1310mm(131cm)
297	FOXCONN	ANTS2M1-CSGH3-EF	-0.52	2.4~2.4835	PIFA	i-pex(MHF)	3.36	1320mm(132cm)
298	FOXCONN	ANTS2M1-CSGH4-EF	-0.55	2.4~2.4835	PIFA	i-pex(MHF)	3.38	1330mm(133cm)
299	FOXCONN	ANTS2M1-CSGH5-EF	-0.57	2.4~2.4835	PIFA	i-pex(MHF)	3.41	1340mm(134cm)
300	FOXCONN	ANTS2M1-CSGH6-EF	-0.60	2.4~2.4835	PIFA	i-pex(MHF)	3.43	1350mm(135cm)
301	FOXCONN	ANTS2M1-CSGH7-EF	-0.62	2.4~2.4835	PIFA	i-pex(MHF)	3.46	1360mm(136cm)
302	FOXCONN	ANTS2M1-CSGH8-EF	-0.65	2.4~2.4835	PIFA	i-pex(MHF)	3.48	1370mm(137cm)
303	FOXCONN	ANTS2M1-CSGH9-EF	-0.67	2.4~2.4835	PIFA	i-pex(MHF)	3.51	1380mm(138cm)

304	FOXCONN	ANTS2M1-CSGN0-EF	-0.70	2.4~2.4835	PIFA	i-pex(MHF)	3.53	1390mm(139cm)
305	FOXCONN	ANTS2M1-CSGN1-EF	-0.72	2.4~2.4835	PIFA	i-pex(MHF)	3.56	1400mm(140cm)
306	FOXCONN	ANTS2M1-CSGN2-EF	-0.75	2.4~2.4835	PIFA	i-pex(MHF)	3.58	1410mm(141cm)
307	FOXCONN	ANTS2M1-CSGN3-EF	-0.78	2.4~2.4835	PIFA	i-pex(MHF)	3.61	1420mm(142cm)
308	FOXCONN	ANTS2M1-CSGN4-EF	-0.80	2.4~2.4835	PIFA	i-pex(MHF)	3.64	1430mm(143cm)
309	FOXCONN	ANTS2M1-CSGN5-EF	-0.83	2.4~2.4835	PIFA	i-pex(MHF)	3.66	1440mm(144cm)
310	FOXCONN	ANTS2M1-CSGN6-EF	-0.85	2.4~2.4835	PIFA	i-pex(MHF)	3.69	1450mm(145cm)
311	FOXCONN	ANTS2M1-CSGN7-EF	-0.88	2.4~2.4835	PIFA	i-pex(MHF)	3.71	1460mm(146cm)
312	FOXCONN	ANTS2M1-CSGN8-EF	-0.90	2.4~2.4835	PIFA	i-pex(MHF)	3.74	1470mm(147cm)
313	FOXCONN	ANTS2M1-CSGN9-EF	-0.93	2.4~2.4835	PIFA	i-pex(MHF)	3.76	1480mm(148cm)
314	FOXCONN	ANTS2M1-CSGJ0-EF	-0.95	2.4~2.4835	PIFA	i-pex(MHF)	3.79	1490mm(149cm)
315	FOXCONN	ANTS2M1-CSGJ1-EF	-0.98	2.4~2.4835	PIFA	i-pex(MHF)	3.81	1500mm(150cm)
316	FOXCONN	ANTS2M1-CSGJ2-EF	-1.00	2.4~2.4835	PIFA	i-pex(MHF)	3.84	1510mm(151cm)
317	FOXCONN	ANTS2M1-CSGJ3-EF	-1.03	2.4~2.4835	PIFA	i-pex(MHF)	3.86	1520mm(152cm)
318	FOXCONN	ANTS2M1-CSGJ4-EF	-1.06	2.4~2.4835	PIFA	i-pex(MHF)	3.89	1530mm(153cm)
319	FOXCONN	ANTS2M1-CSGJ5-EF	-1.08	2.4~2.4835	PIFA	i-pex(MHF)	3.91	1540mm(154cm)
320	FOXCONN	ANTS2M1-CSGJ6-EF	-1.11	2.4~2.4835	PIFA	i-pex(MHF)	3.94	1550mm(155cm)
321	FOXCONN	ANTS2M1-CSGJ7-EF	-1.13	2.4~2.4835	PIFA	i-pex(MHF)	3.97	1560mm(156cm)
322	FOXCONN	ANTS2M1-CSGJ8-EF	-1.16	2.4~2.4835	PIFA	i-pex(MHF)	3.99	1570mm(157cm)
323	FOXCONN	ANTS2M1-CSGJ9-EF	-1.18	2.4~2.4835	PIFA	i-pex(MHF)	4.02	1580mm(158cm)
324	FOXCONN	ANTS2M1-CSGK0-EF	-1.21	2.4~2.4835	PIFA	i-pex(MHF)	4.04	1590mm(159cm)
325	FOXCONN	ANTS2M1-CSGK1-EF	-1.23	2.4~2.4835	PIFA	i-pex(MHF)	4.07	1600mm(160cm)
326	FOXCONN	ANTS2M1-CSGK2-EF	-1.26	2.4~2.4835	PIFA	i-pex(MHF)	4.09	1610mm(161cm)
327	FOXCONN	ANTS2M1-CSGK3-EF	-1.28	2.4~2.4835	PIFA	i-pex(MHF)	4.12	1620mm(162cm)
328	FOXCONN	ANTS2M1-CSGK4-EF	-1.31	2.4~2.4835	PIFA	i-pex(MHF)	4.14	1630mm(163cm)
329	FOXCONN	ANTS2M1-CSGK5-EF	-1.33	2.4~2.4835	PIFA	i-pex(MHF)	4.17	1640mm(164cm)
330	FOXCONN	ANTS2M1-CSGK6-EF	-1.36	2.4~2.4835	PIFA	i-pex(MHF)	4.19	1650mm(165cm)
331	FOXCONN	ANTS2M1-CSGK7-EF	-1.39	2.4~2.4835	PIFA	i-pex(MHF)	4.22	1660mm(166cm)

332	FOXCONN	ANTS2M1-CSGK8-EF	-1.41	2.4~2.4835	PIFA	i-pex(MHF)	4.25	1670mm(167cm)
333	FOXCONN	ANTS2M1-CSGK9-EF	-1.44	2.4~2.4835	PIFA	i-pex(MHF)	4.27	1680mm(168cm)
334	FOXCONN	ANTS2M1-CSGL0-EF	-1.46	2.4~2.4835	PIFA	i-pex(MHF)	4.30	1690mm(169cm)
335	FOXCONN	ANTS2M1-CSGL1-EF	-1.49	2.4~2.4835	PIFA	i-pex(MHF)	4.32	1700mm(170cm)
336	FOXCONN	ANTS2M1-CSGL2-EF	-1.51	2.4~2.4835	PIFA	i-pex(MHF)	4.35	1710mm(171cm)
337	FOXCONN	ANTS2M1-CSGL3-EF	-1.54	2.4~2.4835	PIFA	i-pex(MHF)	4.37	1720mm(172cm)
338	FOXCONN	ANTS2M1-CSGL4-EF	-1.56	2.4~2.4835	PIFA	i-pex(MHF)	4.40	1730mm(173cm)
339	FOXCONN	ANTS2M1-CSGL5-EF	-1.59	2.4~2.4835	PIFA	i-pex(MHF)	4.42	1740mm(174cm)
340	FOXCONN	ANTS2M1-CSGL6-EF	-1.61	2.4~2.4835	PIFA	i-pex(MHF)	4.45	1750mm(175cm)
341	FOXCONN	ANTS2M1-CSGL7-EF	-1.64	2.4~2.4835	PIFA	i-pex(MHF)	4.47	1760mm(176cm)
342	FOXCONN	ANTS2M1-CSGL8-EF	-1.67	2.4~2.4835	PIFA	i-pex(MHF)	4.50	1770mm(177cm)
343	FOXCONN	ANTS2M1-CSGL9-EF	-1.69	2.4~2.4835	PIFA	i-pex(MHF)	4.52	1780mm(178cm)
344	FOXCONN	ANTS2M1-CSGM0-EF	-1.72	2.4~2.4835	PIFA	i-pex(MHF)	4.55	1790mm(179cm)
345	FOXCONN	ANTS2M1-CSGM1-EF	-1.74	2.4~2.4835	PIFA	i-pex(MHF)	4.58	1800mm(180cm)
346	FOXCONN	ANTS2M1-CSGM2-EF	-2.25	2.4~2.4835	PIFA	i-pex(MHF)	5.08	2000mm(200cm)
347	SAA	SN6506-11-010-C	-2.92	2.4~2.4835	PIFA	i-pex(MHF)	0.50	100mm(10cm)
348	SAA	SN6506-11-011-C	-2.95	2.4~2.4835	PIFA	i-pex(MHF)	0.53	110mm(11cm)
349	SAA	SN6506-11-012-C	-2.97	2.4~2.4835	PIFA	i-pex(MHF)	0.55	120mm(12cm)
350	SAA	SN6506-11-013-C	-3.00	2.4~2.4835	PIFA	i-pex(MHF)	0.58	130mm(13cm)
351	SAA	SN6506-11-014-C	-3.03	2.4~2.4835	PIFA	i-pex(MHF)	0.61	140mm(14cm)
352	SAA	SN6506-11-015-C	-3.05	2.4~2.4835	PIFA	i-pex(MHF)	0.63	150mm(15cm)
353	SAA	SN6506-11-016-C	-3.08	2.4~2.4835	PIFA	i-pex(MHF)	0.66	160mm(16cm)
354	SAA	SN6506-11-017-C	-3.11	2.4~2.4835	PIFA	i-pex(MHF)	0.69	170mm(17cm)
355	SAA	SN6506-11-018-C	-3.13	2.4~2.4835	PIFA	i-pex(MHF)	0.71	180mm(18cm)
356	SAA	SN6506-11-019-C	-3.16	2.4~2.4835	PIFA	i-pex(MHF)	0.74	190mm(19cm)
357	SAA	SN6506-11-020-C	-3.19	2.4~2.4835	PIFA	i-pex(MHF)	0.77	200mm(20cm)
358	SAA	SN6506-11-021-C	-3.21	2.4~2.4835	PIFA	i-pex(MHF)	0.79	210mm(21cm)
359	SAA	SN6506-11-022-C	-3.24	2.4~2.4835	PIFA	i-pex(MHF)	0.82	220mm(22cm)
360	SAA	SN6506-11-023-C	-3.27	2.4~2.4835	PIFA	i-pex(MHF)	0.85	230mm(23cm)
361	SAA	SN6506-11-024-C	-3.29	2.4~2.4835	PIFA	i-pex(MHF)	0.87	240mm(24cm)
362	SAA	SN6506-11-025-C	-3.32	2.4~2.4835	PIFA	i-pex(MHF)	0.90	250mm(25cm)
363	SAA	SN6506-11-026-C	-3.35	2.4~2.4835	PIFA	i-pex(MHF)	0.93	260mm(26cm)
364	SAA	SN6506-11-027-C	-3.37	2.4~2.4835	PIFA	i-pex(MHF)	0.95	270mm(27cm)
365	SAA	SN6506-11-028-C	-3.40	2.4~2.4835	PIFA	i-pex(MHF)	0.98	280mm(28cm)
366	SAA	SN6506-11-029-C	-3.43	2.4~2.4835	PIFA	i-pex(MHF)	1.01	290mm(29cm)

367	SAA	SN6506-11-030-C	-3.48	2.4~2.4835	PIFA	i-pex(MHF)	1.06	300mm(30cm)
368	SAA	SN6506-11-031-C	-3.50	2.4~2.4835	PIFA	i-pex(MHF)	1.08	310mm(31cm)
369	SAA	SN6506-11-032-C	-3.53	2.4~2.4835	PIFA	i-pex(MHF)	1.11	320mm(32cm)
370	SAA	SN6506-11-033-C	-3.56	2.4~2.4835	PIFA	i-pex(MHF)	1.14	330mm(33cm)
371	SAA	SN6506-11-034-C	-3.58	2.4~2.4835	PIFA	i-pex(MHF)	1.16	340mm(34cm)
372	SAA	SN6506-11-035-C	-3.61	2.4~2.4835	PIFA	i-pex(MHF)	1.19	350mm(35cm)
373	SAA	SN6506-11-036-C	-3.63	2.4~2.4835	PIFA	i-pex(MHF)	1.21	360mm(36cm)
374	SAA	SN6506-11-037-C	-3.66	2.4~2.4835	PIFA	i-pex(MHF)	1.24	370mm(37cm)
375	SAA	SN6506-11-038-C	-3.69	2.4~2.4835	PIFA	i-pex(MHF)	1.27	380mm(38cm)
376	SAA	SN6506-11-039-C	-3.71	2.4~2.4835	PIFA	i-pex(MHF)	1.29	390mm(39cm)
377	SAA	SN6506-11-040-C	-3.74	2.4~2.4835	PIFA	i-pex(MHF)	1.32	400mm(40cm)
378	SAA	SN6506-11-041-C	-3.77	2.4~2.4835	PIFA	i-pex(MHF)	1.35	410mm(41cm)
379	SAA	SN6506-11-042-C	-3.79	2.4~2.4835	PIFA	i-pex(MHF)	1.37	420mm(42cm)
380	SAA	SN6506-11-043-C	-3.82	2.4~2.4835	PIFA	i-pex(MHF)	1.40	430mm(43cm)
381	SAA	SN6506-11-044-C	-3.85	2.4~2.4835	PIFA	i-pex(MHF)	1.43	440mm(44cm)
382	SAA	SN6506-11-045-C	-3.87	2.4~2.4835	PIFA	i-pex(MHF)	1.45	450mm(45cm)
383	SAA	SN6506-11-046-C	-3.90	2.4~2.4835	PIFA	i-pex(MHF)	1.48	460mm(46cm)
384	SAA	SN6506-11-047-C	-3.92	2.4~2.4835	PIFA	i-pex(MHF)	1.50	470mm(47cm)
385	SAA	SN6506-11-048-C	-3.95	2.4~2.4835	PIFA	i-pex(MHF)	1.53	480mm(48cm)
386	SAA	SN6506-11-049-C	-3.98	2.4~2.4835	PIFA	i-pex(MHF)	1.56	490mm(49cm)
387	SAA	SN6506-11-050-C	-4.00	2.4~2.4835	PIFA	i-pex(MHF)	1.58	500mm(50cm)
388	SAA	SN6506-11-051-C	-4.03	2.4~2.4835	PIFA	i-pex(MHF)	1.61	510mm(51cm)
389	SAA	SN6506-11-052-C	-4.06	2.4~2.4835	PIFA	i-pex(MHF)	1.64	520mm(52cm)
390	SAA	SN6506-11-053-C	-4.08	2.4~2.4835	PIFA	i-pex(MHF)	1.66	530mm(53cm)
391	SAA	SN6506-11-054-C	-4.11	2.4~2.4835	PIFA	i-pex(MHF)	1.69	540mm(54cm)
392	SAA	SN6506-11-055-C	-4.13	2.4~2.4835	PIFA	i-pex(MHF)	1.71	550mm(55cm)
393	SAA	SN6506-11-056-C	-4.16	2.4~2.4835	PIFA	i-pex(MHF)	1.74	560mm(56cm)
394	SAA	SN6506-11-057-C	-4.19	2.4~2.4835	PIFA	i-pex(MHF)	1.77	575mm(57.5cm)
395	SAA	SN6506-11-058-C	-4.21	2.4~2.4835	PIFA	i-pex(MHF)	1.79	580mm(58cm)
396	SAA	SN6506-11-059-C	-4.24	2.4~2.4835	PIFA	i-pex(MHF)	1.82	590mm(59cm)
397	SAA	SN6506-11-060-C	-4.27	2.4~2.4835	PIFA	i-pex(MHF)	1.85	600mm(60cm)
398	SAA	SN6506-11-061-C	-4.29	2.4~2.4835	PIFA	i-pex(MHF)	1.87	610mm(61cm)
399	SAA	SN6506-11-062-C	-4.32	2.4~2.4835	PIFA	i-pex(MHF)	1.90	620mm(62cm)
400	SAA	SN6506-11-063-C	-4.35	2.4~2.4835	PIFA	i-pex(MHF)	1.93	630mm(63cm)
401	SAA	SN6506-11-064-C	-4.37	2.4~2.4835	PIFA	i-pex(MHF)	1.95	640mm(64cm)
402	SAA	SN6506-11-065-C	-4.40	2.4~2.4835	PIFA	i-pex(MHF)	1.98	650mm(65cm)
403	SAA	SN6506-11-066-C	-4.42	2.4~2.4835	PIFA	i-pex(MHF)	2.00	660mm(66cm)
404	SAA	SN6506-11-067-C	-4.45	2.4~2.4835	PIFA	i-pex(MHF)	2.03	670mm(67cm)
405	SAA	SN6506-11-068-C	-4.48	2.4~2.4835	PIFA	i-pex(MHF)	2.06	680mm(68cm)
406	SAA	SN6506-11-069-C	-4.50	2.4~2.4835	PIFA	i-pex(MHF)	2.08	690mm(69cm)
407	SAA	SN6506-11-070-C	-4.53	2.4~2.4835	PIFA	i-pex(MHF)	2.11	700mm(70cm)
408	SAA	SN6506-11-071-C	-4.56	2.4~2.4835	PIFA	i-pex(MHF)	2.14	710mm(71cm)

409	SAA	SN6506-11-072-C	-4.58	2.4~2.4835	PIFA	i-pex(MHF)	2.16	720mm(72cm)
410	SAA	SN6506-11-073-C	-4.61	2.4~2.4835	PIFA	i-pex(MHF)	2.19	730mm(73cm)
411	SAA	SN6506-11-074-C	-4.63	2.4~2.4835	PIFA	i-pex(MHF)	2.21	740mm(74cm)
412	SAA	SN6506-11-075-C	-4.66	2.4~2.4835	PIFA	i-pex(MHF)	2.24	750mm(75cm)
413	SAA	SN6506-11-076-C	-4.69	2.4~2.4835	PIFA	i-pex(MHF)	2.27	760mm(76cm)
414	SAA	SN6506-11-077-C	-4.71	2.4~2.4835	PIFA	i-pex(MHF)	2.29	770mm(77cm)
415	SAA	SN6506-11-078-C	-4.74	2.4~2.4835	PIFA	i-pex(MHF)	2.32	780mm(78cm)
416	SAA	SN6506-11-079-C	-4.77	2.4~2.4835	PIFA	i-pex(MHF)	2.35	790mm(79cm)
417	SAA	SN6506-11-080-C	-4.79	2.4~2.4835	PIFA	i-pex(MHF)	2.37	800mm(80cm)
418	SAA	SN6506-11-081-C	-4.82	2.4~2.4835	PIFA	i-pex(MHF)	2.40	810mm(81cm)
419	SAA	SN6506-11-082-C	-4.85	2.4~2.4835	PIFA	i-pex(MHF)	2.43	820mm(82cm)
420	SAA	SN6506-11-083-C	-4.87	2.4~2.4835	PIFA	i-pex(MHF)	2.45	830mm(83cm)
421	SAA	SN6506-11-084-C	-4.90	2.4~2.4835	PIFA	i-pex(MHF)	2.48	840mm(84cm)
422	SAA	SN6506-11-085-C	-4.92	2.4~2.4835	PIFA	i-pex(MHF)	2.50	850mm(85cm)
423	SAA	SN6506-11-086-C	-4.95	2.4~2.4835	PIFA	i-pex(MHF)	2.53	860mm(86cm)
424	SAA	SN6506-11-087-C	-4.98	2.4~2.4835	PIFA	i-pex(MHF)	2.56	870mm(87cm)
425	SAA	SN6506-11-088-C	-5.00	2.4~2.4835	PIFA	i-pex(MHF)	2.58	880mm(88cm)
426	SAA	SN6506-11-089-C	-5.03	2.4~2.4835	PIFA	i-pex(MHF)	2.61	890mm(89cm)
427	SAA	SN6506-11-090-C	-5.06	2.4~2.4835	PIFA	i-pex(MHF)	2.64	900mm(90cm)
428	SAA	SN6506-11-091-C	-5.08	2.4~2.4835	PIFA	i-pex(MHF)	2.66	910mm(91cm)
429	SAA	SN6506-11-092-C	-5.11	2.4~2.4835	PIFA	i-pex(MHF)	2.69	920mm(92cm)
430	SAA	SN6506-11-093-C	-5.13	2.4~2.4835	PIFA	i-pex(MHF)	2.71	930mm(93cm)
431	SAA	SN6506-11-094-C	-5.16	2.4~2.4835	PIFA	i-pex(MHF)	2.74	940mm(94cm)
432	SAA	SN6506-11-095-C	-5.19	2.4~2.4835	PIFA	i-pex(MHF)	2.77	950mm(95cm)
433	SAA	SN6506-11-096-C	-5.21	2.4~2.4835	PIFA	i-pex(MHF)	2.79	960mm(96cm)
434	SAA	SN6506-11-097-C	-5.24	2.4~2.4835	PIFA	i-pex(MHF)	2.82	970mm(97cm)
435	SAA	SN6506-11-098-C	-5.27	2.4~2.4835	PIFA	i-pex(MHF)	2.85	980mm(98cm)
436	SAA	SN6506-11-099-C	-5.29	2.4~2.4835	PIFA	i-pex(MHF)	2.87	990mm(99cm)
437	SAA	SN6506-11-100-C	-5.32	2.4~2.4835	PIFA	i-pex(MHF)	2.90	1000mm(100cm)
438	SAA	SN6506-11-101-C	-5.35	2.4~2.4835	PIFA	i-pex(MHF)	2.93	1010mm(101cm)
439	SAA	SN6506-11-102-C	-5.37	2.4~2.4835	PIFA	i-pex(MHF)	2.95	1020mm(102cm)
440	SAA	SN6506-11-103-C	-5.40	2.4~2.4835	PIFA	i-pex(MHF)	2.98	1030mm(103cm)
441	SAA	SN6506-11-104-C	-5.42	2.4~2.4835	PIFA	i-pex(MHF)	3.00	1040mm(104cm)
442	SAA	SN6506-11-105-C	-5.45	2.4~2.4835	PIFA	i-pex(MHF)	3.03	1050mm(105cm)
443	SAA	SN6506-11-106-C	-5.48	2.4~2.4835	PIFA	i-pex(MHF)	3.06	1060mm(106cm)
444	SAA	SN6506-11-107-C	-5.50	2.4~2.4835	PIFA	i-pex(MHF)	3.08	1070mm(107cm)
445	SAA	SN6506-11-108-C	-5.53	2.4~2.4835	PIFA	i-pex(MHF)	3.11	1080mm(108cm)

446	SAA	SN6506-11-109-C	-5.56	2.4~2.4835	PIFA	i-pex(MHF)	3.14	1090mm(109cm)
447	SAA	SN6506-11-110-C	-5.58	2.4~2.4835	PIFA	i-pex(MHF)	3.16	1100mm(110cm)
448	SAA	SN6506-11-111-C	-5.61	2.4~2.4835	PIFA	i-pex(MHF)	3.19	1110mm(111cm)
449	SAA	SN6506-11-112-C	-5.63	2.4~2.4835	PIFA	i-pex(MHF)	3.21	1120mm(112cm)
450	SAA	SN6506-11-113-C	-5.66	2.4~2.4835	PIFA	i-pex(MHF)	3.24	1130mm(113cm)
451	SAA	SN6506-11-114-C	-5.69	2.4~2.4835	PIFA	i-pex(MHF)	3.27	1140mm(114cm)
452	SAA	SN6506-11-115-C	-5.71	2.4~2.4835	PIFA	i-pex(MHF)	3.29	1150mm(115cm)
453	SAA	SN6506-11-116-C	-5.74	2.4~2.4835	PIFA	i-pex(MHF)	3.32	1160mm(116cm)
454	SAA	SN6506-11-117-C	-5.77	2.4~2.4835	PIFA	i-pex(MHF)	3.35	1170mm(117cm)
455	SAA	SN6506-11-118-C	-5.79	2.4~2.4835	PIFA	i-pex(MHF)	3.37	1180mm(118cm)
456	SAA	SN6506-11-119-C	-5.82	2.4~2.4835	PIFA	i-pex(MHF)	3.40	1190mm(119cm)
457	SAA	SN6506-11-120-C	-5.85	2.4~2.4835	PIFA	i-pex(MHF)	3.43	1200mm(120cm)
458	SAA	SN6506-11-121-C	-5.87	2.4~2.4835	PIFA	i-pex(MHF)	3.45	1210mm(121cm)
459	SAA	SN6506-11-122-C	-5.90	2.4~2.4835	PIFA	i-pex(MHF)	3.48	1220mm(122cm)
460	SAA	SN6506-11-123-C	-5.92	2.4~2.4835	PIFA	i-pex(MHF)	3.50	1230mm(123cm)
461	SAA	SN6506-11-124-C	-5.95	2.4~2.4835	PIFA	i-pex(MHF)	3.53	1240mm(124cm)
462	SAA	SN6506-11-125-C	-5.98	2.4~2.4835	PIFA	i-pex(MHF)	3.56	1250mm(125cm)
463	SAA	SN6506-11-126-C	-6.00	2.4~2.4835	PIFA	i-pex(MHF)	3.58	1260mm(126cm)
464	SAA	SN6506-11-127-C	-6.03	2.4~2.4835	PIFA	i-pex(MHF)	3.61	1270mm(127cm)
465	SAA	SN6506-11-128-C	-6.06	2.4~2.4835	PIFA	i-pex(MHF)	3.64	1280mm(128cm)
466	SAA	SN6506-11-129-C	-6.08	2.4~2.4835	PIFA	i-pex(MHF)	3.66	1290mm(129cm)
467	SAA	SN6506-11-130-C	-6.11	2.4~2.4835	PIFA	i-pex(MHF)	3.69	1300mm(130cm)
468	SAA	SN6506-11-131-C	-6.13	2.4~2.4835	PIFA	i-pex(MHF)	3.71	1310mm(131cm)
469	SAA	SN6506-11-132-C	-6.16	2.4~2.4835	PIFA	i-pex(MHF)	3.74	1320mm(132cm)
470	SAA	SN6506-11-133-C	-6.19	2.4~2.4835	PIFA	i-pex(MHF)	3.77	1330mm(133cm)
471	SAA	SN6506-11-134-C	-6.21	2.4~2.4835	PIFA	i-pex(MHF)	3.79	1340mm(134cm)
472	SAA	SN6506-11-135-C	-6.24	2.4~2.4835	PIFA	i-pex(MHF)	3.82	1350mm(135cm)
473	SAA	SN6506-11-136-C	-6.27	2.4~2.4835	PIFA	i-pex(MHF)	3.85	1360mm(136cm)

474	SAA	SN6506-11-137-C	-6.29	2.4~2.4835	PIFA	i-pex(MHF)	3.87	1370mm(137c m)
475	SAA	SN6506-11-138-C	-6.32	2.4~2.4835	PIFA	i-pex(MHF)	3.90	1380mm(138c m)
476	SAA	SN6506-11-139-C	-6.35	2.4~2.4835	PIFA	i-pex(MHF)	3.93	1390mm(139c m)
477	SAA	SN6506-11-140-C	-6.37	2.4~2.4835	PIFA	i-pex(MHF)	3.95	1400mm(140c m)
478	SAA	SN6506-11-141-C	-6.40	2.4~2.4835	PIFA	i-pex(MHF)	3.98	1410mm(141c m)
479	SAA	SN6506-11-142-C	-6.42	2.4~2.4835	PIFA	i-pex(MHF)	4.00	1420mm(142c m)
480	SAA	SN6506-11-143-C	-6.45	2.4~2.4835	PIFA	i-pex(MHF)	4.03	1430mm(143c m)
481	SAA	SN6506-11-144-C	-6.48	2.4~2.4835	PIFA	i-pex(MHF)	4.06	1440mm(144c m)
482	SAA	SN6506-11-145-C	-6.50	2.4~2.4835	PIFA	i-pex(MHF)	4.08	1450mm(145c m)
483	SAA	SN6506-11-146-C	-6.53	2.4~2.4835	PIFA	i-pex(MHF)	4.11	1460mm(146c m)
484	SAA	SN6506-11-147-C	-6.56	2.4~2.4835	PIFA	i-pex(MHF)	4.14	1470mm(147c m)
485	SAA	SN6506-11-148-C	-6.58	2.4~2.4835	PIFA	i-pex(MHF)	4.16	1480mm(148c m)
486	SAA	SN6506-11-149-C	-6.61	2.4~2.4835	PIFA	i-pex(MHF)	4.19	1490mm(149c m)
487	SAA	SN6506-11-150-C	-6.63	2.4~2.4835	PIFA	i-pex(MHF)	4.21	1500mm(150c m)
488	SAA	SN6506-11-151-C	-6.66	2.4~2.4835	PIFA	i-pex(MHF)	4.24	1510mm(151c m)
489	SAA	SN6506-11-152-C	-6.69	2.4~2.4835	PIFA	i-pex(MHF)	4.27	1520mm(152c m)
490	SAA	SN6506-11-153-C	-6.71	2.4~2.4835	PIFA	i-pex(MHF)	4.29	1530mm(153c m)
491	SAA	SN6506-11-154-C	-6.74	2.4~2.4835	PIFA	i-pex(MHF)	4.32	1540mm(154c m)
492	SAA	SN6506-11-155-C	-6.77	2.4~2.4835	PIFA	i-pex(MHF)	4.35	1550mm(155c m)
493	SAA	SN6506-11-156-C	-6.79	2.4~2.4835	PIFA	i-pex(MHF)	4.37	1560mm(156c m)
494	SAA	SN6506-11-157-C	-6.82	2.4~2.4835	PIFA	i-pex(MHF)	4.40	1570mm(157c m)
495	SAA	SN6506-11-158-C	-6.85	2.4~2.4835	PIFA	i-pex(MHF)	4.43	1580mm(158c m)
496	SAA	SN6506-11-159-C	-6.87	2.4~2.4835	PIFA	i-pex(MHF)	4.45	1590mm(159c m)
497	SAA	SN6506-11-160-C	-6.90	2.4~2.4835	PIFA	i-pex(MHF)	4.48	1600mm(160c m)
498	SAA	SN6506-11-161-C	-6.92	2.4~2.4835	PIFA	i-pex(MHF)	4.50	1610mm(161c m)
499	SAA	SN6506-11-162-C	-6.95	2.4~2.4835	PIFA	i-pex(MHF)	4.53	1620mm(162c m)
500	SAA	SN6506-11-163-C	-6.98	2.4~2.4835	PIFA	i-pex(MHF)	4.56	1630mm(163c m)
501	SAA	SN6506-11-164-C	-7.00	2.4~2.4835	PIFA	i-pex(MHF)	4.58	1640mm(164c m)

502	SAA	SN6506-11-165-C	-7.03	2.4~2.4835	PIFA	i-pex(MHF)	4.61	1650mm(165cm)
503	SAA	SN6506-11-166-C	-7.06	2.4~2.4835	PIFA	i-pex(MHF)	4.64	1660mm(166cm)
504	SAA	SN6506-11-167-C	-7.08	2.4~2.4835	PIFA	i-pex(MHF)	4.66	1670mm(167cm)
505	SAA	SN6506-11-168-C	-7.11	2.4~2.4835	PIFA	i-pex(MHF)	4.69	1680mm(168cm)
506	SAA	SN6506-11-169-C	-7.13	2.4~2.4835	PIFA	i-pex(MHF)	4.71	1690mm(169cm)
507	SAA	SN6506-11-170-C	-7.16	2.4~2.4835	PIFA	i-pex(MHF)	4.74	1700mm(170cm)
508	SAA	SN6506-11-171-C	-7.19	2.4~2.4835	PIFA	i-pex(MHF)	4.77	1710mm(171cm)
509	SAA	SN6506-11-172-C	-7.21	2.4~2.4835	PIFA	i-pex(MHF)	4.79	1720mm(172cm)
510	SAA	SN6506-11-173-C	-7.24	2.4~2.4835	PIFA	i-pex(MHF)	4.82	1730mm(173cm)
511	SAA	SN6506-11-174-C	-7.27	2.4~2.4835	PIFA	i-pex(MHF)	4.85	1740mm(174cm)
512	SAA	SN6506-11-175-C	-7.29	2.4~2.4835	PIFA	i-pex(MHF)	4.87	1750mm(175cm)
513	SAA	SN6506-11-176-C	-7.32	2.4~2.4835	PIFA	i-pex(MHF)	4.90	1760mm(176cm)
514	SAA	SN6506-11-177-C	-7.35	2.4~2.4835	PIFA	i-pex(MHF)	4.93	1770mm(177cm)
515	SAA	SN6506-11-178-C	-7.37	2.4~2.4835	PIFA	i-pex(MHF)	4.95	1780mm(178cm)
516	SAA	SN6506-11-179-C	-7.40	2.4~2.4835	PIFA	i-pex(MHF)	4.98	1790mm(179cm)
517	SAA	SN6506-11-180-C	-7.42	2.4~2.4835	PIFA	i-pex(MHF)	5.00	1800mm(180cm)
518	SAA	SN6506-11-200-C	-8.31	2.4~2.4835	PIFA	i-pex(MHF)	5.50	2000mm(200cm)

For WLAN used

Antenna Set.	PCB Chain	Brand	Model	Antenna Gain(dBi)	Frequency range (GHz-GHz)	Antenna Type
1	Chain 0	Foxconn Corp.(FIT)	ANTS2M2-CZZ04-EF	1.3	2.4~2.5	Metal PIFA
				3.61	5.15~5.35	
				3.69	5.47~5.725	
				3.06	5.725~5.850	
	Chain 1	Foxconn Corp.(FIT)	ANTS2M2-CZZ03-EF	3.32	2.4~2.5	Metal PIFA
				1.92	5.15~5.35	
				2	5.47~5.725	
				-0.84	5.725~5.850	

5. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	2TX	2RX
802.11g	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	2TX	2RX
802.11n (HT20)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11n (HT40)	MCS 0~7	2TX	2RX
	MCS 8~15	2TX	2RX
802.11ac (VHT20)	MCS0~8 Nss=1	2TX	2RX
	MCS0~8 Nss=2	2TX	2RX
802.11ac (VHT40)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX
802.11ac (VHT80)	MCS0~9 Nss=1	2TX	2RX
	MCS0~9 Nss=2	2TX	2RX

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE \geq 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

NOTE: The EUT's antenna had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.


MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE \geq 1G	21deg. C, 69%RH	120Vac, 60Hz	Russell Yeh
RE $<$ 1G	24deg. C, 74%RH	120Vac, 60Hz	Russell Yeh
PLC	23deg. C, 72%RH	120Vac, 60Hz	Arthur Yang
APCM	23deg. C, 66%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is 100 %, duty factor is not required.

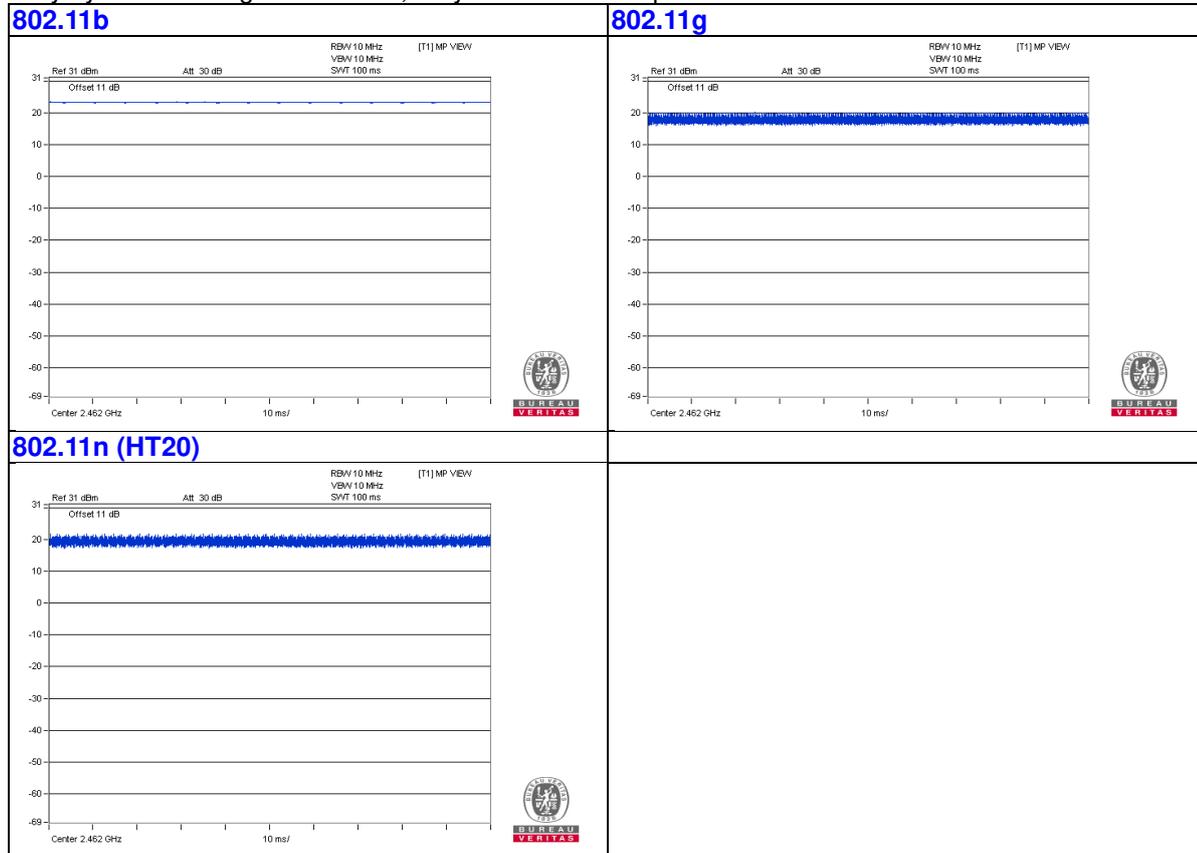

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Test Tool	NA	NA	NA	NA	Supplied by client
B.	Notebook Computer	LENOVO	E440	PF071LWC	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Console Cable	1	0.1	No	0	Supplied by client
2.	USB Cable	1	1	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

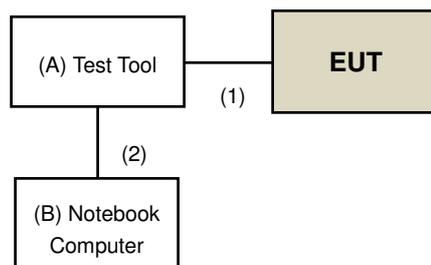

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY54450088	July 24, 2015	July 23, 2016
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A01922	Sep. 19, 2015	Sep. 18, 2016
RF Cable	EMC104-SM-SM-2000 EMC104-SM-SM-5000 EMC104-SM-SM-5000	150318 150323 150324	Mar. 30, 2016	Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated_V8.7.07	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSP40	100060	May 11, 2016	May 10, 2017
Power meter Anritsu	ML2495A	1014008	May 05, 2016	May 04, 2017
Power sensor Anritsu	MA2411B	0917122	May 05, 2016	May 04, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
- 6 Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: May 26 to June 13, 2016

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Frequency Range below 1GHz>

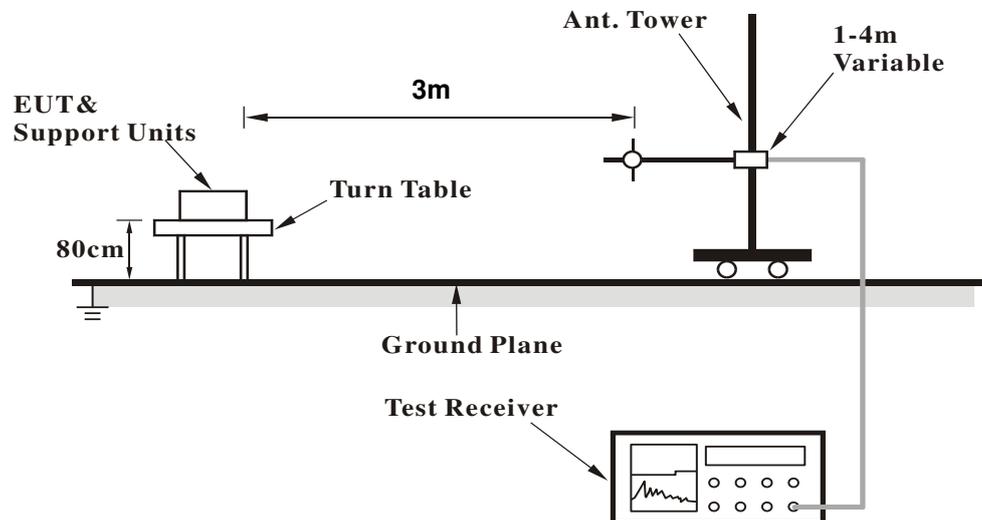

<Frequency Range above 1GHz>

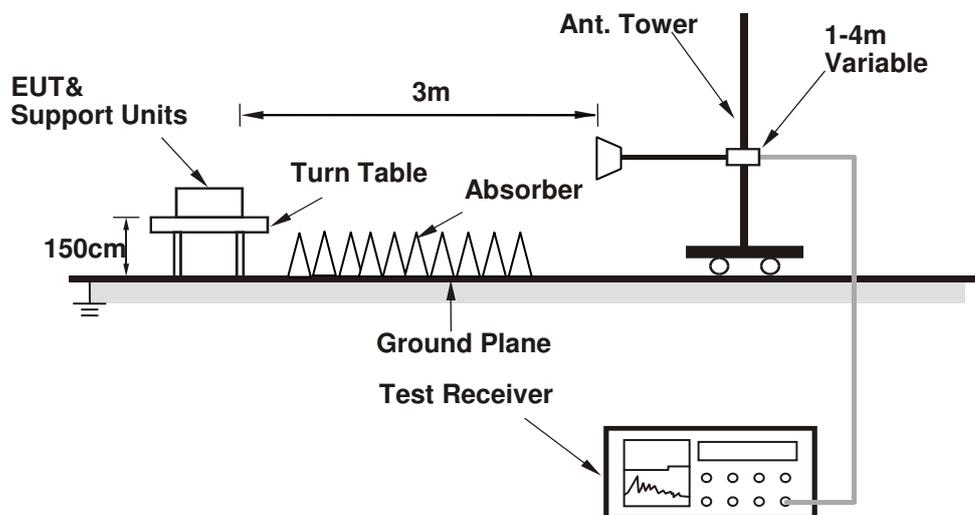

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Connected the EUT with the Notebook Computer which is placed on remote site.
- b. Controlling software (MT7662UQA.exe[Ver 1.0.3.19]) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.00	68.6 PK	74.0	-5.4	1.32 H	30	74.2	-5.6
2	2387.00	53.9 AV	54.0	-0.1	1.32 H	30	59.5	-5.6
3	*2412.00	112.8 PK			1.32 H	30	118.3	-5.5
4	*2412.00	110.7 AV			1.32 H	30	116.2	-5.5
5	4824.00	54.3 PK	74.0	-19.7	2.47 H	309	53.4	0.9
6	4824.00	52.7 AV	54.0	-1.3	2.47 H	309	51.8	0.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2387.00	64.1 PK	74.0	-9.9	2.99 V	125	69.7	-5.6
2	2387.00	47.4 AV	54.0	-6.6	2.99 V	125	53.0	-5.6
3	*2412.00	109.4 PK			2.99 V	125	114.9	-5.5
4	*2412.00	106.8 AV			2.99 V	125	112.3	-5.5
5	4824.00	55.7 PK	74.0	-18.3	3.11 V	165	54.8	0.9
6	4824.00	53.8 AV	54.0	-0.2	3.11 V	165	52.9	0.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	113.2 PK			1.29 H	54	118.6	-5.4
2	*2437.00	110.8 AV			1.29 H	54	116.2	-5.4
3	4874.00	54.7 PK	74.0	-19.3	2.54 H	304	53.7	1.0
4	4874.00	53.1 AV	54.0	-0.9	2.54 H	304	52.1	1.0
5	7311.00	51.0 PK	74.0	-23.0	3.20 H	135	43.4	7.6
6	7311.00	42.2 AV	54.0	-11.8	3.20 H	135	34.6	7.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.3 PK			2.93 V	139	113.7	-5.4
2	*2437.00	106.2 AV			2.93 V	139	111.6	-5.4
3	4874.00	55.8 PK	74.0	-18.2	3.12 V	128	54.8	1.0
4	4874.00	53.9 AV	54.0	-0.1	3.12 V	128	52.9	1.0
5	7311.00	51.5 PK	74.0	-22.5	1.18 V	175	43.9	7.6
6	7311.00	42.7 AV	54.0	-11.3	1.18 V	175	35.1	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.1 PK			1.17 H	37	119.4	-5.3
2	*2462.00	111.5 AV			1.17 H	37	116.8	-5.3
3	2486.70	72.2 PK	74.0	-1.8	1.17 H	37	77.4	-5.2
4	2486.70	51.7 AV	54.0	-2.3	1.17 H	37	56.9	-5.2
5	4924.00	54.4 PK	74.0	-19.6	2.51 H	297	53.1	1.3
6	4924.00	53.1 AV	54.0	-0.9	2.51 H	297	51.8	1.3
7	7386.00	50.3 PK	74.0	-23.7	3.19 H	136	42.6	7.7
8	7386.00	41.8 AV	54.0	-12.2	3.19 H	136	34.1	7.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.1 PK			2.94 V	124	114.4	-5.3
2	*2462.00	106.7 AV			2.94 V	124	112.0	-5.3
3	2486.70	66.3 PK	74.0	-7.7	2.94 V	124	71.5	-5.2
4	2486.70	49.9 AV	54.0	-4.1	2.94 V	124	55.1	-5.2
5	4924.00	55.6 PK	74.0	-18.4	2.61 V	132	54.3	1.3
6	4924.00	53.9 AV	54.0	-0.1	2.61 V	132	52.6	1.3
7	7386.00	51.9 PK	74.0	-22.1	1.21 V	188	44.2	7.7
8	7386.00	42.9 AV	54.0	-11.1	1.21 V	188	35.2	7.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.7 PK	74.0	-0.3	1.08 H	38	79.3	-5.6
2	2390.00	53.4 AV	54.0	-0.6	1.08 H	38	59.0	-5.6
3	*2412.00	111.8 PK			1.08 H	38	117.3	-5.5
4	*2412.00	101.7 AV			1.08 H	38	107.2	-5.5
5	4824.00	49.4 PK	74.0	-24.6	2.52 H	307	48.5	0.9
6	4824.00	39.6 AV	54.0	-14.4	2.52 H	307	38.7	0.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	3.04 V	123	78.4	-5.6
2	2390.00	53.1 AV	54.0	-0.9	3.04 V	123	58.7	-5.6
3	*2412.00	104.6 PK			3.04 V	123	110.1	-5.5
4	*2412.00	94.4 AV			3.04 V	123	99.9	-5.5
5	4824.00	50.4 PK	74.0	-23.6	2.58 V	142	49.5	0.9
6	4824.00	39.7 AV	54.0	-14.3	2.58 V	142	38.8	0.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.5 PK	74.0	-0.5	1.07 H	53	79.1	-5.6
2	2390.00	53.2 AV	54.0	-0.8	1.07 H	53	58.8	-5.6
3	*2437.00	119.9 PK			1.07 H	53	125.3	-5.4
4	*2437.00	109.1 AV			1.07 H	53	114.5	-5.4
5	2483.50	73.5 PK	74.0	-0.5	1.07 H	53	78.8	-5.3
6	2483.50	49.9 AV	54.0	-4.1	1.07 H	53	55.2	-5.3
7	4874.00	60.1 PK	74.0	-13.9	2.59 H	313	59.1	1.0
8	4874.00	48.7 AV	54.0	-5.3	2.59 H	313	47.7	1.0
9	7311.00	48.7 PK	74.0	-25.3	3.16 H	151	41.1	7.6
10	7311.00	38.9 AV	54.0	-15.1	3.16 H	151	31.3	7.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	2.94 V	110	78.4	-5.6
2	2390.00	52.7 AV	54.0	-1.3	2.94 V	110	58.3	-5.6
3	*2437.00	115.0 PK			2.94 V	110	120.4	-5.4
4	*2437.00	104.1 AV			2.94 V	110	109.5	-5.4
5	2483.50	70.1 PK	74.0	-3.9	2.94 V	110	75.4	-5.3
6	2483.50	49.7 AV	54.0	-4.3	2.94 V	110	55.0	-5.3
7	4874.00	62.7 PK	74.0	-11.3	2.61 V	142	61.7	1.0
8	4874.00	50.2 AV	54.0	-3.8	2.61 V	142	49.2	1.0
9	7311.00	49.2 PK	74.0	-24.8	1.15 V	178	41.6	7.6
10	7311.00	39.1 AV	54.0	-14.9	1.15 V	178	31.5	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.7 PK			1.00 H	50	118.0	-5.3
2	*2462.00	101.9 AV			1.00 H	50	107.2	-5.3
3	2483.50	73.8 PK	74.0	-0.2	1.00 H	50	79.1	-5.3
4	2483.50	53.0 AV	54.0	-1.0	1.00 H	50	58.3	-5.3
5	4924.00	49.2 PK	74.0	-24.8	2.51 H	312	47.9	1.3
6	4924.00	39.2 AV	54.0	-14.8	2.51 H	312	37.9	1.3
7	7386.00	48.8 PK	74.0	-25.2	3.20 H	127	41.1	7.7
8	7386.00	38.7 AV	54.0	-15.3	3.20 H	127	31.0	7.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.2 PK			2.99 V	136	109.5	-5.3
2	*2462.00	94.5 AV			2.99 V	136	99.8	-5.3
3	2483.50	72.7 PK	74.0	-1.3	2.99 V	136	78.0	-5.3
4	2483.50	52.1 AV	54.0	-1.9	2.99 V	136	57.4	-5.3
5	4924.00	50.7 PK	74.0	-23.3	2.66 V	135	49.4	1.3
6	4924.00	40.1 AV	54.0	-13.9	2.66 V	135	38.8	1.3
7	7386.00	49.2 PK	74.0	-24.8	1.21 V	201	41.5	7.7
8	7386.00	39.1 AV	54.0	-14.9	1.21 V	201	31.4	7.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.2 PK	74.0	-0.8	1.07 H	53	78.8	-5.6
2	2390.00	53.1 AV	54.0	-0.9	1.07 H	53	58.7	-5.6
3	*2412.00	109.3 PK			1.07 H	53	114.8	-5.5
4	*2412.00	98.8 AV			1.07 H	53	104.3	-5.5
5	4824.00	48.9 PK	74.0	-25.1	2.57 H	302	48.0	0.9
6	4824.00	39.0 AV	54.0	-15.0	2.57 H	302	38.1	0.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.9 PK	74.0	-0.1	2.94 V	182	79.5	-5.6
2	2390.00	53.5 AV	54.0	-0.5	2.94 V	182	59.1	-5.6
3	*2412.00	102.1 PK			2.94 V	182	107.6	-5.5
4	*2412.00	92.1 AV			2.94 V	182	97.6	-5.5
5	4824.00	50.7 PK	74.0	-23.3	2.56 V	142	49.8	0.9
6	4824.00	40.3 AV	54.0	-13.7	2.56 V	142	39.4	0.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.3 PK	74.0	-0.7	1.10 H	41	78.9	-5.6
2	2390.00	53.2 AV	54.0	-0.8	1.10 H	41	58.8	-5.6
3	*2437.00	120.4 PK			1.02 H	47	125.8	-5.4
4	*2437.00	109.5 AV			1.02 H	47	114.9	-5.4
5	2483.50	73.2 PK	74.0	-0.8	1.10 H	40	78.5	-5.3
6	2483.50	49.9 AV	54.0	-4.1	1.10 H	40	55.2	-5.3
7	4874.00	60.7 PK	74.0	-13.3	2.53 H	317	59.7	1.0
8	4874.00	49.1 AV	54.0	-4.9	2.53 H	317	48.1	1.0
9	7311.00	48.7 PK	74.0	-25.3	3.26 H	137	41.1	7.6
10	7311.00	39.0 AV	54.0	-15.0	3.26 H	137	31.4	7.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	3.03 V	137	78.4	-5.6
2	2390.00	52.7 AV	54.0	-1.3	3.03 V	137	58.3	-5.6
3	*2437.00	115.1 PK			3.03 V	137	120.5	-5.4
4	*2437.00	104.1 AV			3.03 V	137	109.5	-5.4
5	2483.50	70.7 PK	74.0	-3.3	3.03 V	137	76.0	-5.3
6	2483.50	50.0 AV	54.0	-4.0	3.03 V	137	55.3	-5.3
7	4874.00	62.6 PK	74.0	-11.4	2.56 V	126	61.6	1.0
8	4874.00	50.2 AV	54.0	-3.8	2.56 V	126	49.2	1.0
9	7311.00	49.7 PK	74.0	-24.3	1.19 V	184	42.1	7.6
10	7311.00	39.5 AV	54.0	-14.5	1.19 V	184	31.9	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.0 PK			1.01 H	55	117.3	-5.3
2	*2462.00	101.4 AV			1.01 H	55	106.7	-5.3
3	2483.50	73.8 PK	74.0	-0.2	1.03 H	57	79.1	-5.3
4	2483.50	52.7 AV	54.0	-1.3	1.03 H	57	58.0	-5.3
5	4924.00	49.5 PK	74.0	-24.5	2.49 H	303	48.2	1.3
6	4924.00	39.5 AV	54.0	-14.5	2.49 H	303	38.2	1.3
7	7386.00	49.1 PK	74.0	-24.9	3.15 H	133	41.4	7.7
8	7386.00	38.9 AV	54.0	-15.1	3.15 H	133	31.2	7.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.2 PK			3.17 V	190	109.5	-5.3
2	*2462.00	94.2 AV			3.17 V	190	99.5	-5.3
3	2483.50	72.8 PK	74.0	-1.2	3.17 V	190	78.1	-5.3
4	2483.50	52.1 AV	54.0	-1.9	3.17 V	190	57.4	-5.3
5	4924.00	50.8 PK	74.0	-23.2	2.66 V	118	49.5	1.3
6	4924.00	40.0 AV	54.0	-14.0	2.66 V	118	38.7	1.3
7	7386.00	49.4 PK	74.0	-24.6	1.17 V	198	41.7	7.7
8	7386.00	39.4 AV	54.0	-14.6	1.17 V	198	31.7	7.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	109.39	25.4 QP	43.5	-18.1	1.50 H	322	36.9	-11.5
2	169.46	35.7 QP	43.5	-7.8	2.00 H	297	44.8	-9.1
3	260.79	41.2 QP	46.0	-4.8	1.00 H	262	50.7	-9.5
4	322.45	39.1 QP	46.0	-6.9	1.00 H	278	46.3	-7.2
5	403.23	29.6 QP	46.0	-16.4	1.00 H	78	34.9	-5.3
6	608.75	37.4 QP	46.0	-8.6	1.50 H	94	37.7	-0.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	108.30	22.6 QP	43.5	-20.9	1.00 V	239	34.1	-11.5
2	163.71	32.5 QP	43.5	-11.0	1.00 V	106	41.2	-8.7
3	241.99	27.5 QP	46.0	-18.5	2.00 V	325	37.7	-10.2
4	282.37	32.6 QP	46.0	-13.4	1.50 V	360	41.1	-8.5
5	405.39	28.6 QP	46.0	-17.4	1.00 V	360	33.8	-5.2
6	612.44	26.7 QP	46.0	-19.3	1.50 V	334	26.9	-0.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 09, 2016	May 08, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Sep. 01, 2015	Aug. 31, 2016
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 11, 2015	June 10, 2016
RF Cable	5D-FB	COCCAB-001	Mar. 08, 2016	Mar. 07, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-002	Sep. 14, 2015	Sep. 13, 2016
50 ohms Terminator	N/A	EMC-03	Sep. 23, 2015	Sep. 22, 2016
50 ohms Terminator	N/A	EMC-02	Oct. 01, 2015	Sep. 30, 2016
50 ohms Terminator	E1-011315	13	Dec. 11 2015	Dec. 10 2016
Software BVADT	BVADT_Cond_ V7.3.7.3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: May 30, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

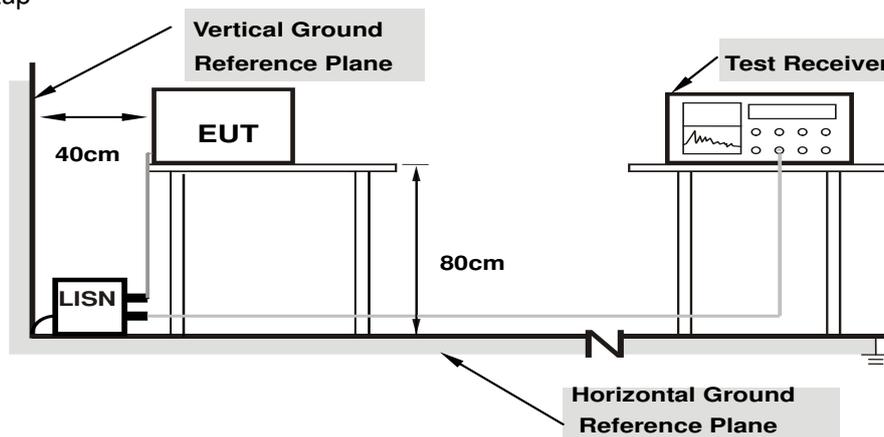

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.26328	10.29	39.37	12.48	49.66	22.77	61.33	51.33	-11.67	-28.56
2	0.32578	10.29	25.37	12.17	35.66	22.46	59.56	49.56	-23.90	-27.10
3	0.65781	10.27	23.98	10.22	34.25	20.49	56.00	46.00	-21.75	-25.51
4	0.95859	10.23	21.56	9.49	31.79	19.72	56.00	46.00	-24.21	-26.28
5	1.40625	10.24	17.09	8.80	27.33	19.04	56.00	46.00	-28.67	-26.96
6	2.41016	10.29	17.53	10.46	27.82	20.75	56.00	46.00	-28.18	-25.25

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

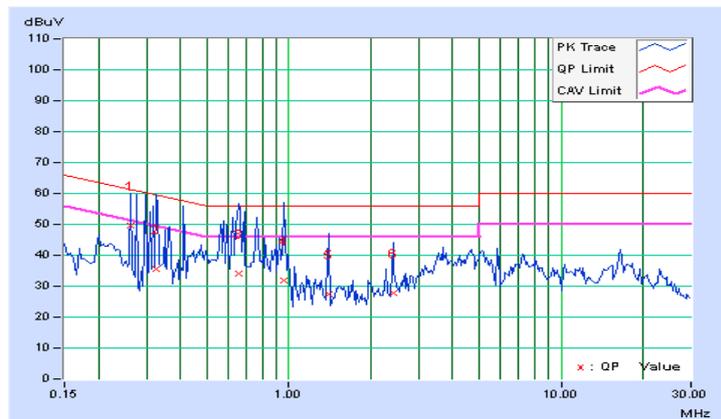


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor (dB)	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.24375	10.26	30.70	17.71	40.96	27.97	61.97	51.97	-21.01	-24.00
2	0.32969	10.27	26.15	9.90	36.42	20.17	59.46	49.46	-23.04	-29.29
3	0.50000	10.27	37.56	10.74	47.83	21.01	56.00	46.00	-8.17	-24.99
4	0.98203	10.22	23.89	10.88	34.11	21.10	56.00	46.00	-21.89	-24.90
5	3.72656	10.42	27.83	21.89	38.25	32.31	56.00	46.00	-17.75	-13.69
6	4.74219	10.45	26.28	20.69	36.73	31.14	56.00	46.00	-19.27	-14.86

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

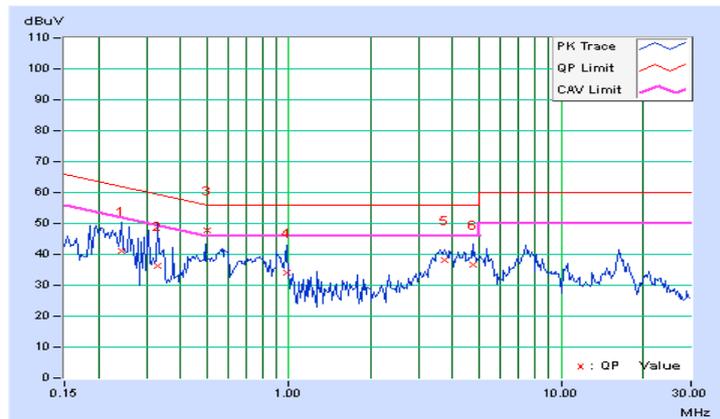


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup

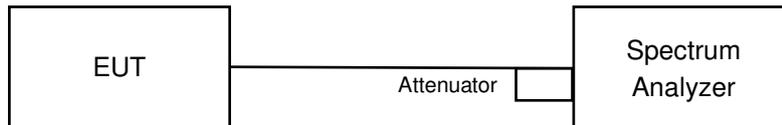

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	10.13	10.13	0.5	Pass
6	2437	10.11	10.11	0.5	Pass
11	2462	10.11	10.11	0.5	Pass

802.11g


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	16.59	16.61	0.5	Pass
6	2437	16.53	17.36	0.5	Pass
11	2462	16.56	16.51	0.5	Pass

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	17.54	17.64	0.5	Pass
6	2437	17.56	17.62	0.5	Pass
11	2462	17.71	17.58	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH11

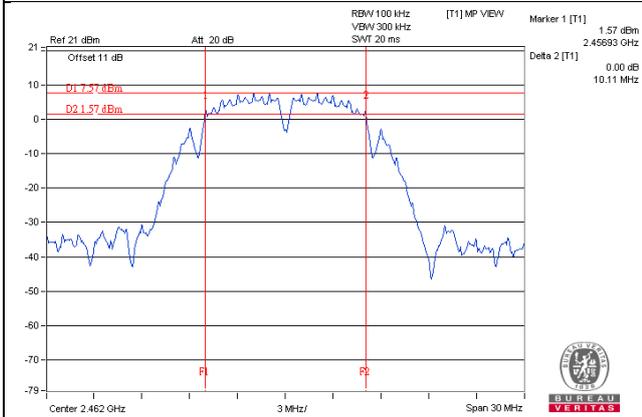

802.11g / Chain 1 : CH11

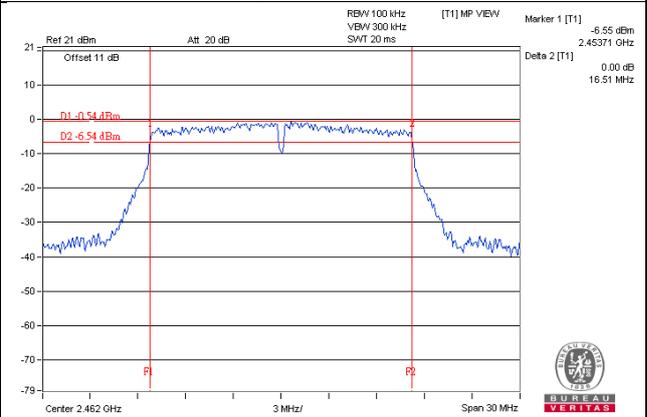

802.11n (HT20) / Chain 0 : CH1

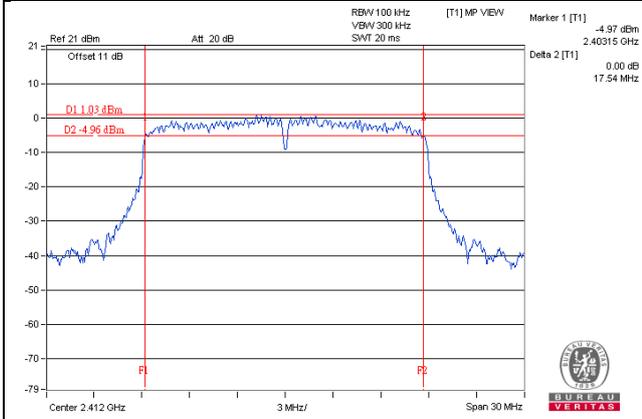

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

FOR PEAK POWER

802.11b

Chan.	Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.25	22.57	348.597	25.42	30	Pass
6	2437	22.33	23.11	375.646	25.75	30	Pass
11	2462	22.93	23.36	413.106	26.16	30	Pass

802.11g

Chan.	Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.61	23.82	470.606	26.73	30	Pass
6	2437	26.32	25.56	788.298	28.97	30	Pass
11	2462	23.87	23.62	473.925	26.76	30	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	22.69	22.34	357.176	25.53	30	Pass
6	2437	26.12	25.48	762.444	28.82	30	Pass
11	2462	22.18	21.84	317.953	25.02	30	Pass

FOR AVERAGE POWER

802.11b

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	19.06	19.61	171.949	22.35
6	2437	19.19	20.01	183.216	22.63
11	2462	19.92	20.38	207.319	23.17

802.11g

Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	14.75	15.18	62.815	17.98
6	2437	21.75	21.64	295.505	24.71
11	2462	14.42	14.67	56.978	17.56

802.11n (HT20)


Chan.	Frequency (MHz)	Avg. Power (dBm)		Total Power (mW)	Total Power (dBm)
		Chain 0	Chain 1		
1	2412	13.76	13.95	48.599	16.87
6	2437	20.91	20.61	238.39	23.77
11	2462	13.26	13.23	42.222	16.26

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup

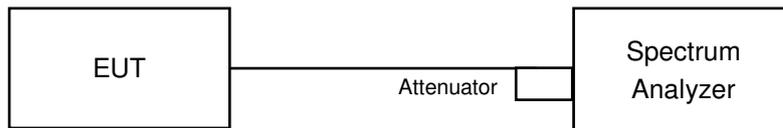

4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-8.97	3.01	-5.96	8.00	Pass
	6	2437	-8.37	3.01	-5.36	8.00	Pass
	11	2462	-8.59	3.01	-5.58	8.00	Pass
1	1	2412	-9.74	3.01	-6.73	8.00	Pass
	6	2437	-11.07	3.01	-8.06	8.00	Pass
	11	2462	-11.04	3.01	-8.03	8.00	Pass

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$ = 5.38dBi < 6dBi , so the power density limit shall not be reduced.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.54	3.01	-10.53	8.00	Pass
	6	2437	-6.43	3.01	-3.42	8.00	Pass
	11	2462	-13.74	3.01	-10.73	8.00	Pass
1	1	2412	-13.88	3.01	-10.87	8.00	Pass
	6	2437	-8.30	3.01	-5.29	8.00	Pass
	11	2462	-15.72	3.01	-12.71	8.00	Pass

NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$ = 5.38dBi < 6dBi , so the power density limit shall not be reduced.


802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-13.59	3.01	-10.58	8.00	Pass
	6	2437	-5.91	3.01	-2.90	8.00	Pass
	11	2462	-11.85	3.01	-8.84	8.00	Pass
1	1	2412	-12.67	3.01	-9.66	8.00	Pass
	6	2437	-6.32	3.01	-3.31	8.00	Pass
	11	2462	-11.77	3.01	-8.76	8.00	Pass


NOTE: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$ = 5.38dBi < 6dBi , so the power density limit shall not be reduced.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH6

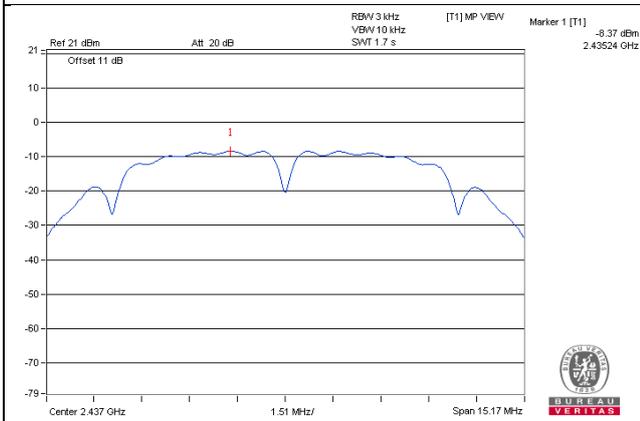

802.11g / Chain 0 : CH6

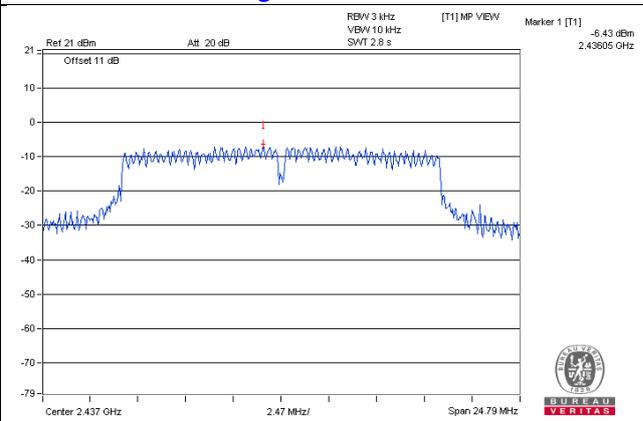

802.11n (HT20) / Chain 0 : CH6

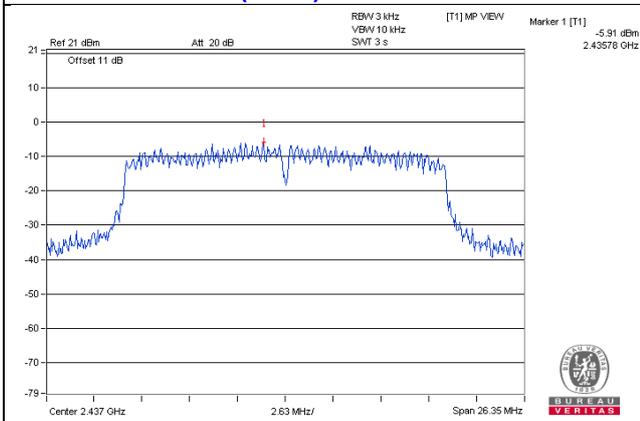


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup

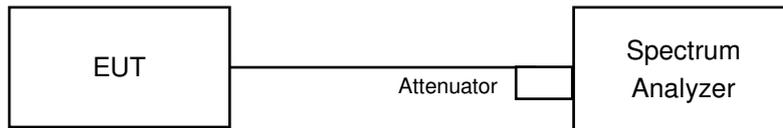

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition



Same as Item 4.3.6

4.6.7 Test Results



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

802.11b - CHAIN 0



CH 1

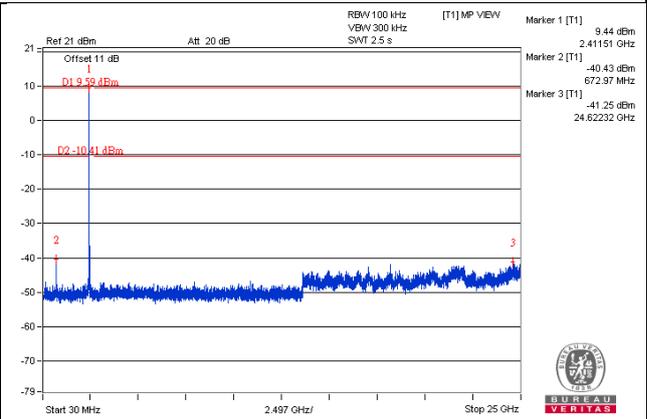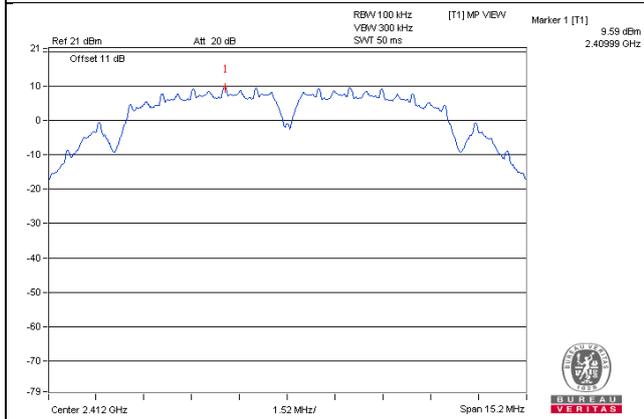


CH 6

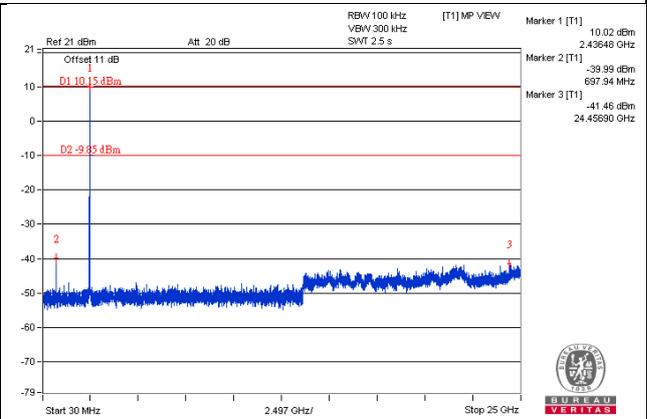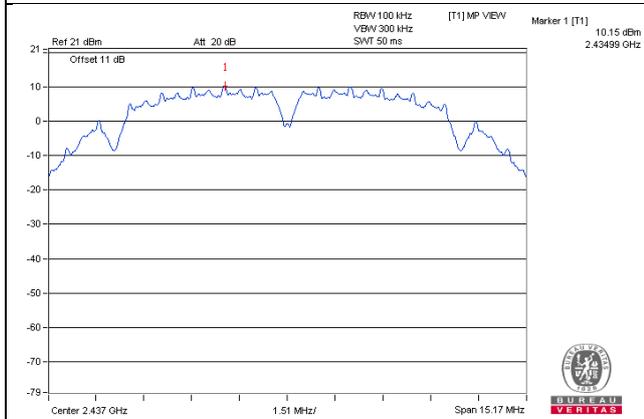


CH 11

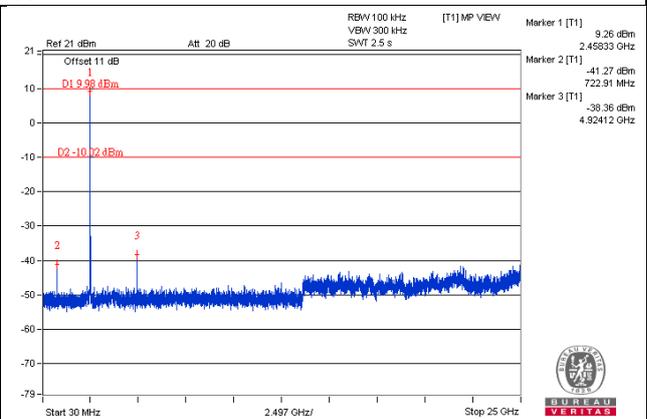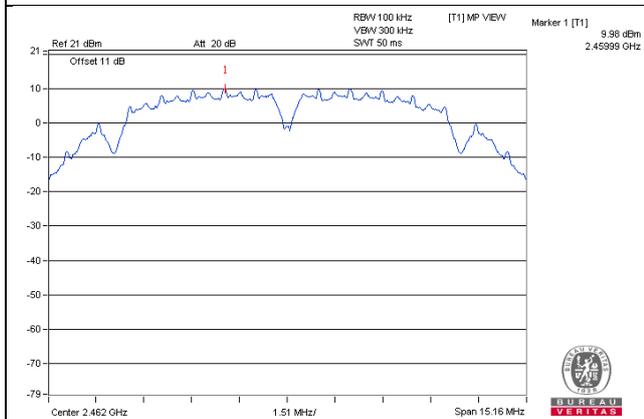

CH 1 Band edge


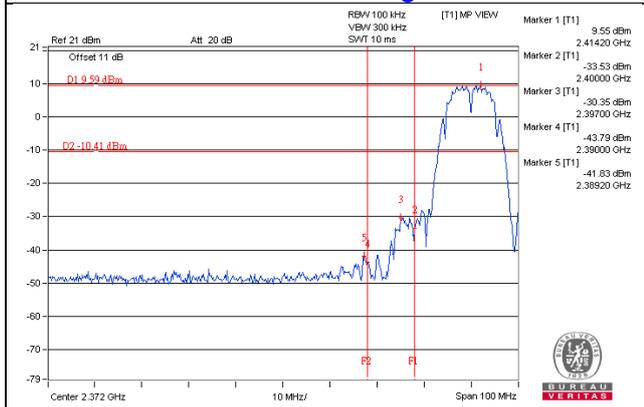


CH 11 Band edge


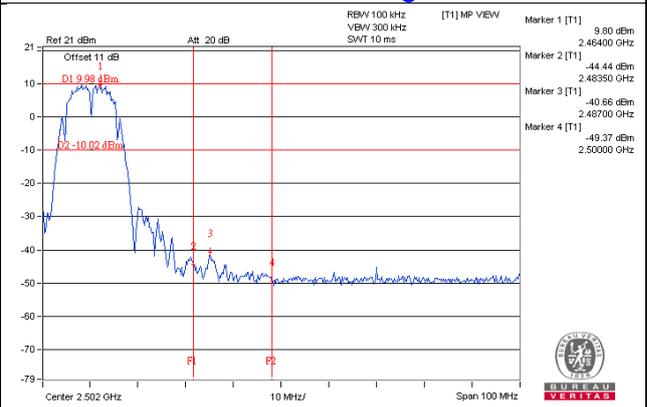


CHAIN 1



CH 1

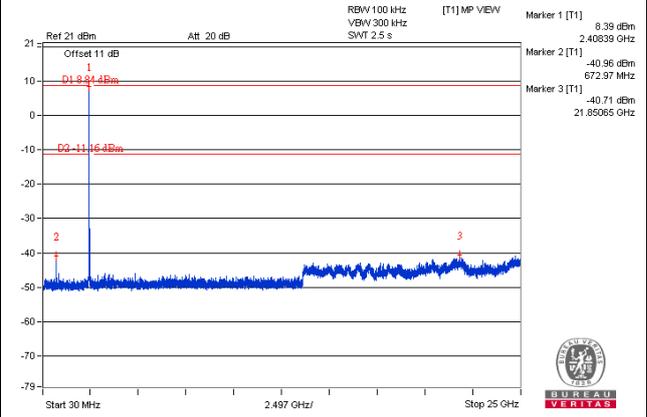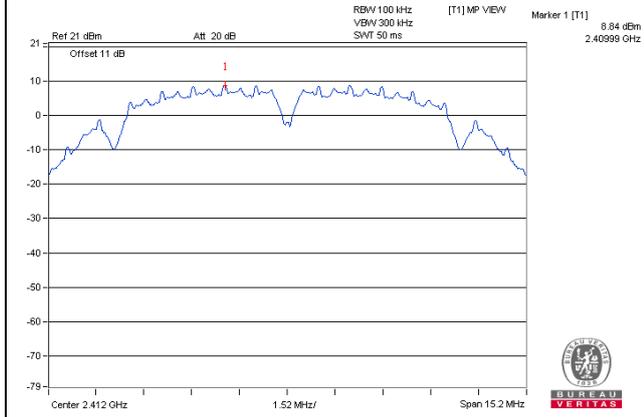


CH 6

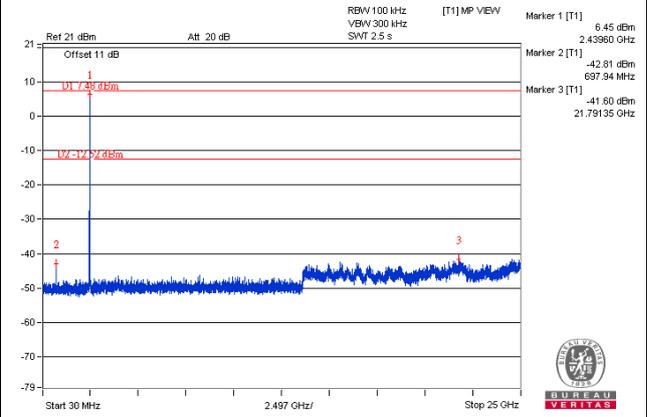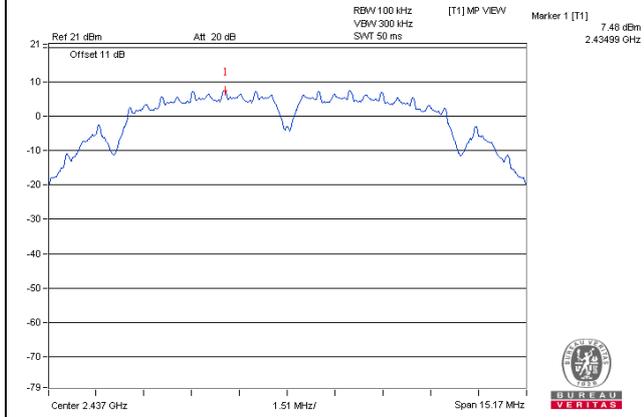


CH 11

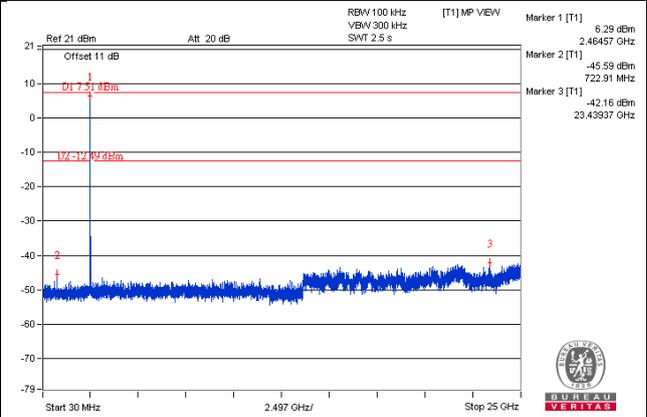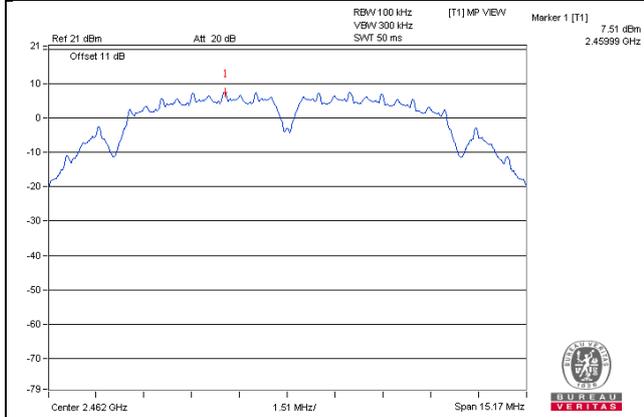

CH 1 Band edge


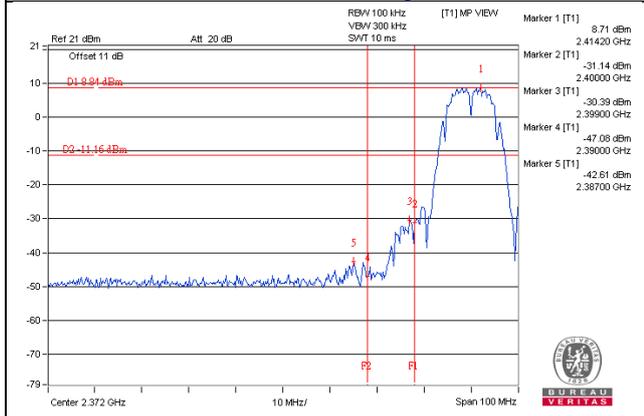


CH 11 Band edge


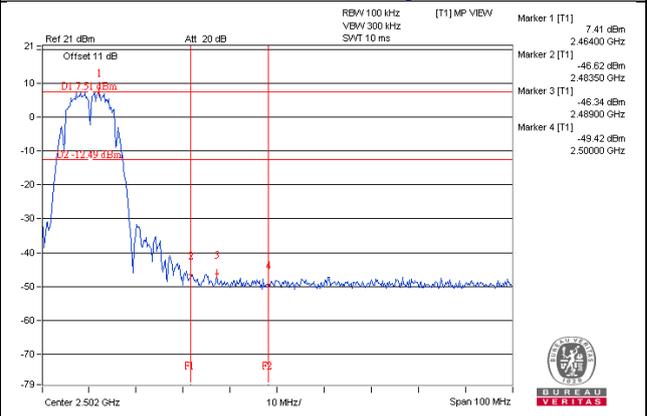


802.11g - CHAIN 0



CH 1

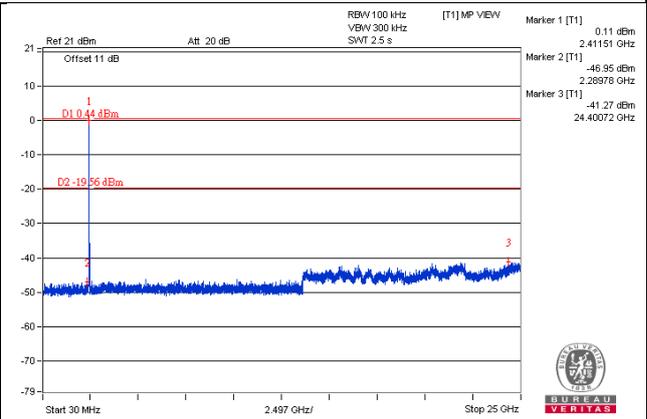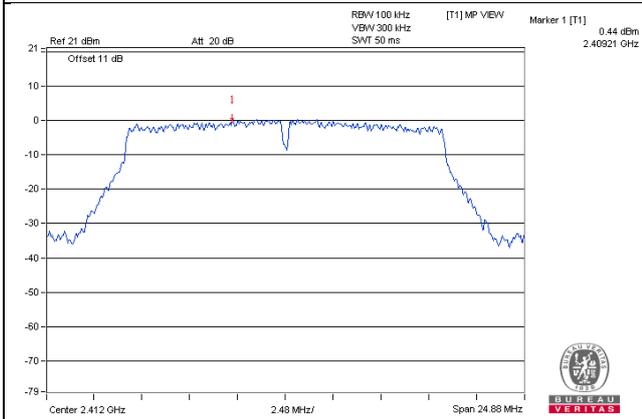


CH 6

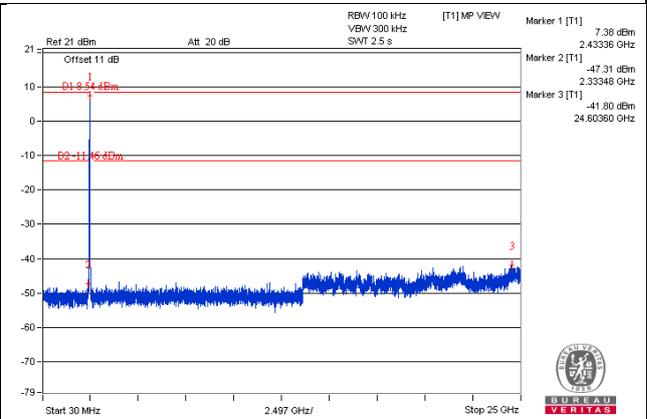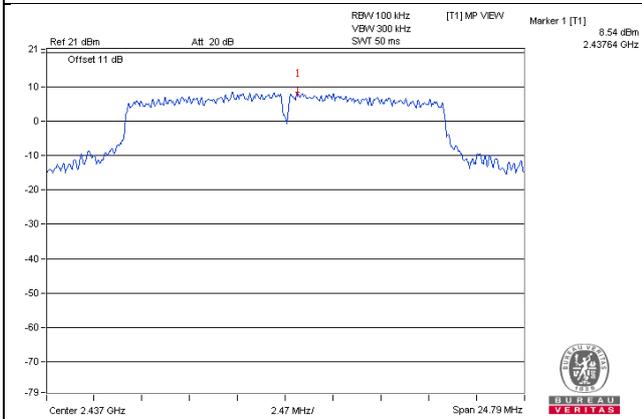


CH 11

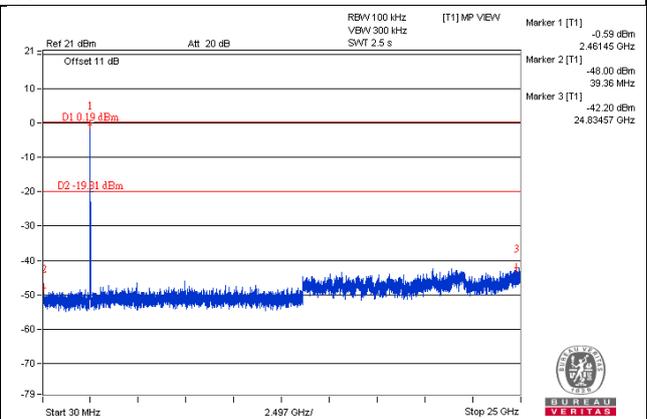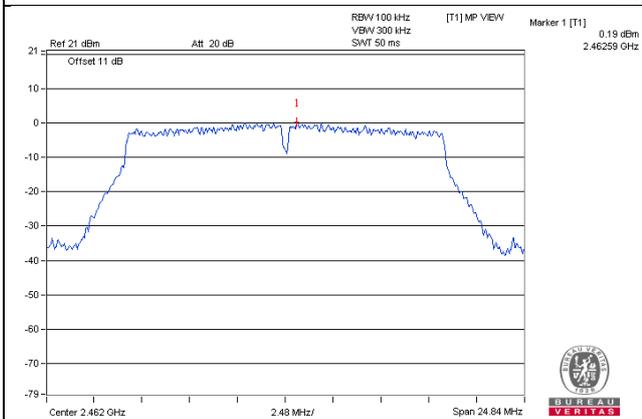

CH 1 Band edge


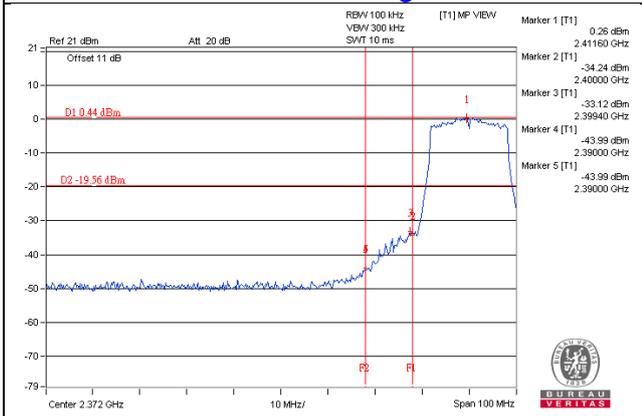


CH 11 Band edge


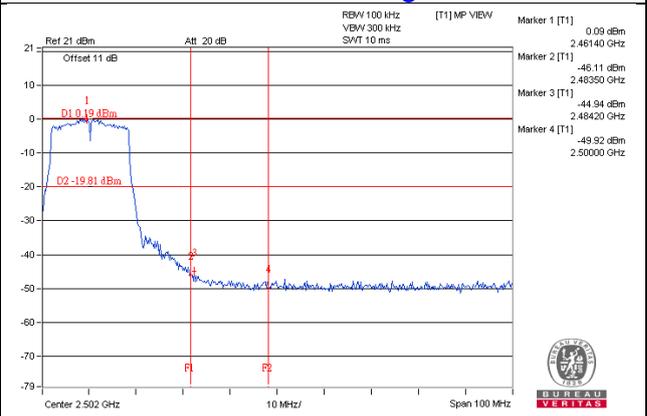


CHAIN 1



CH 1

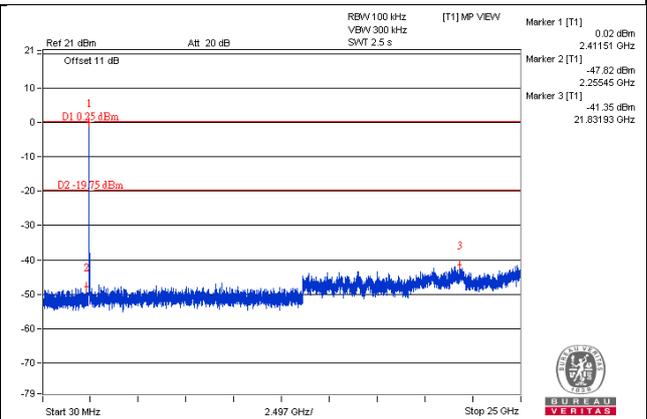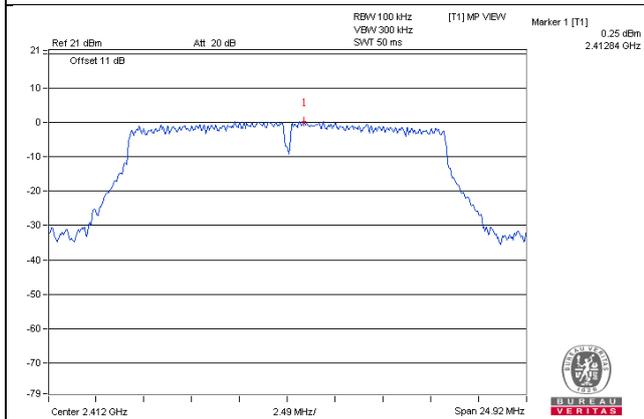


CH 6

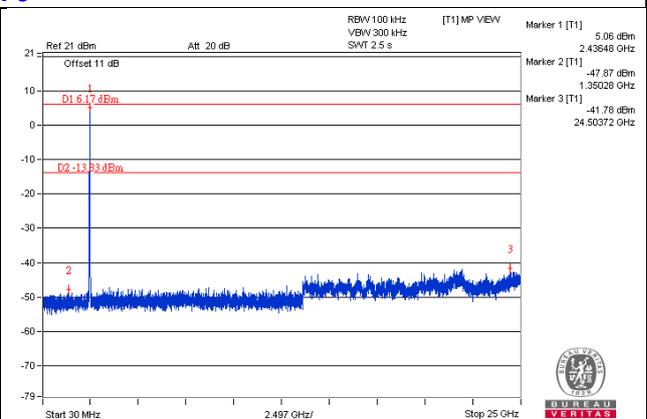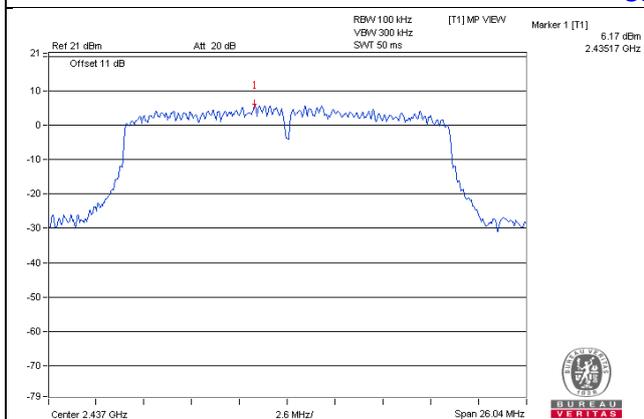


CH 11

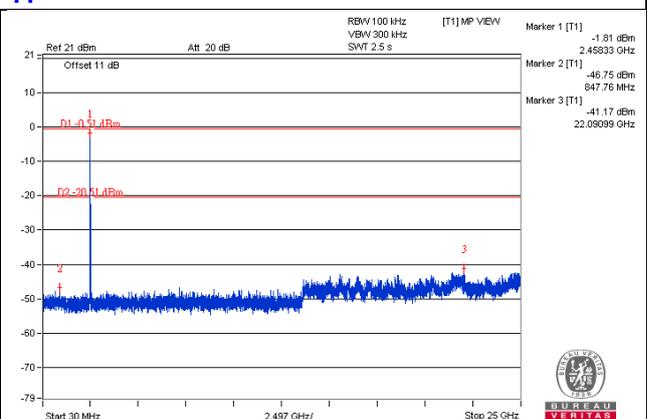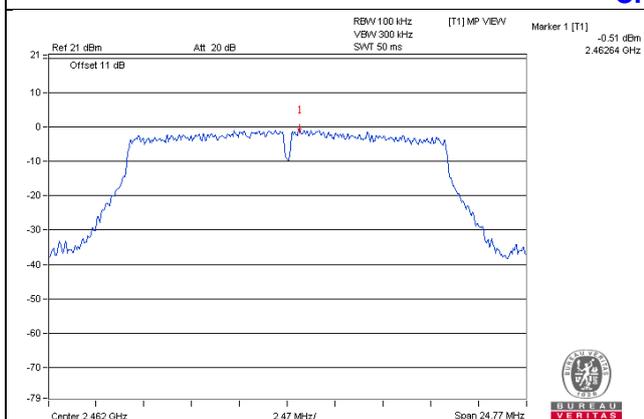

CH 1 Band edge


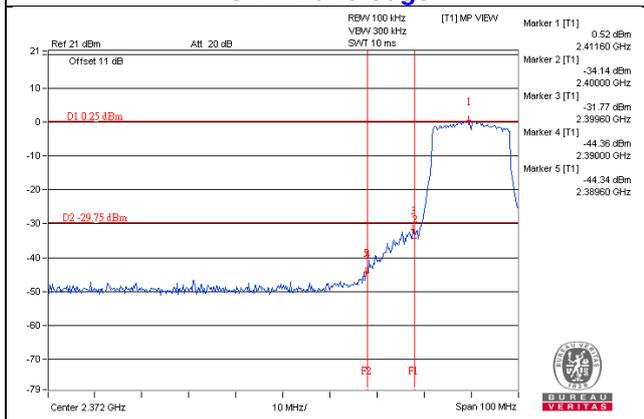


CH 11 Band edge


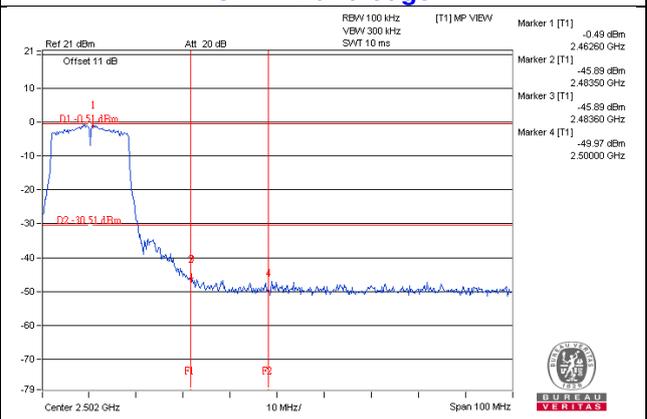


802.11n (HT20) - CHAIN 0



CH 1

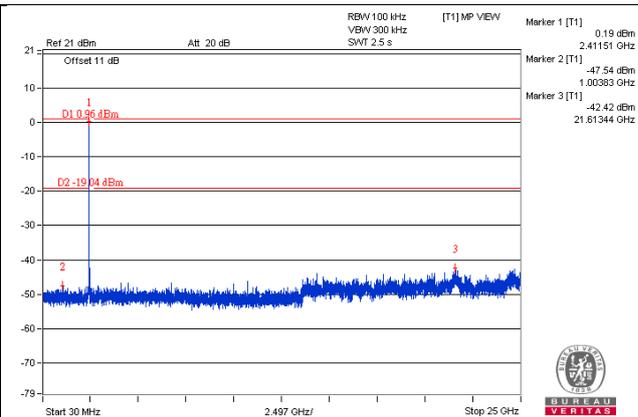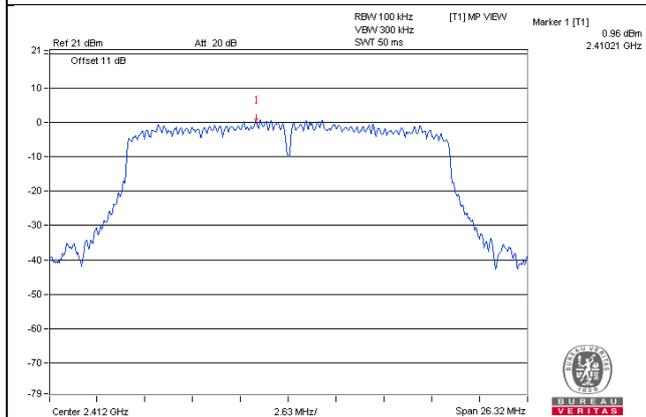


CH 6

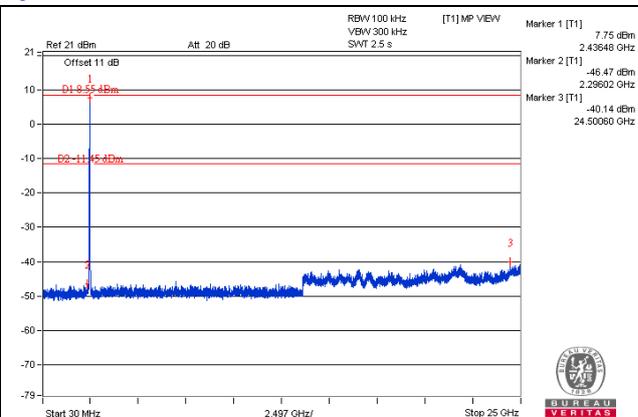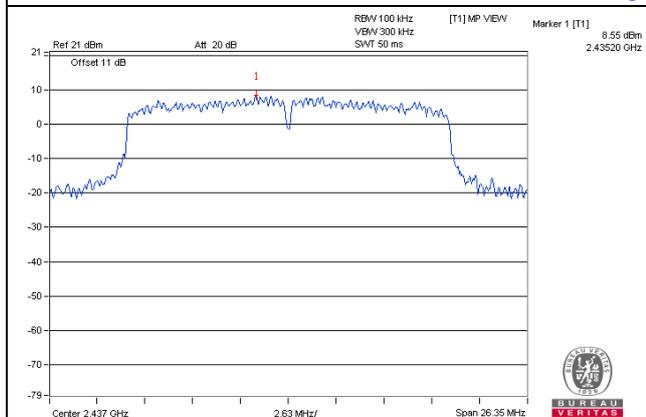


CH 11

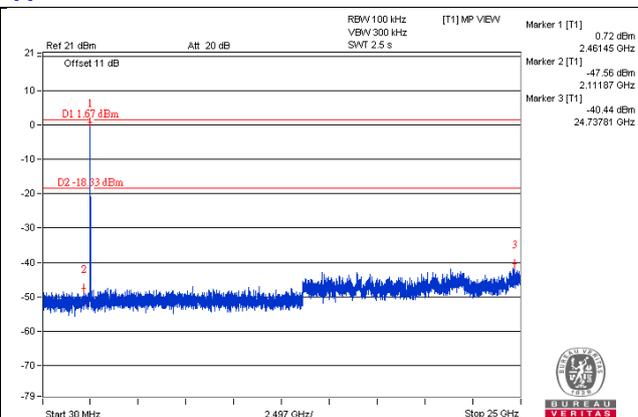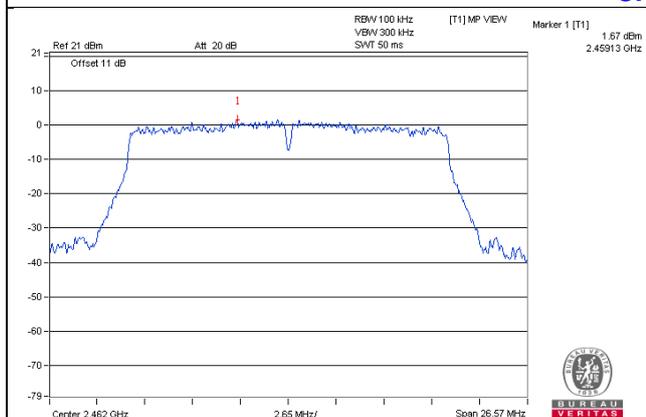

CH 1 Band edge


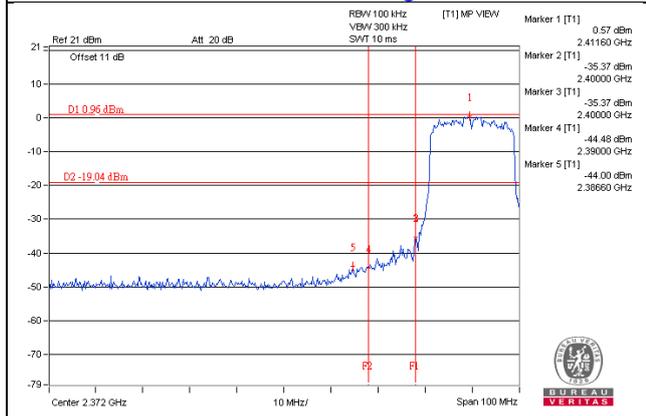


CH 11 Band edge


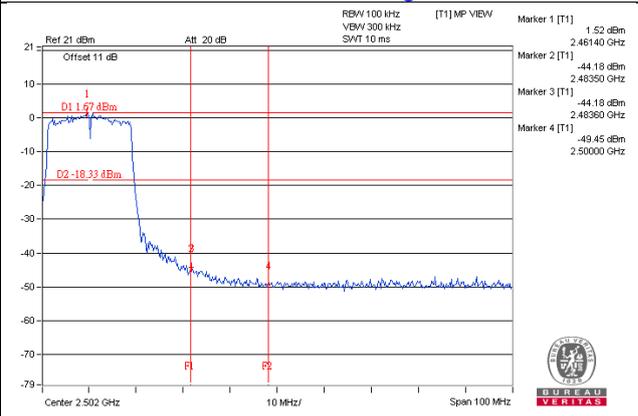


CHAIN 1



CH 1

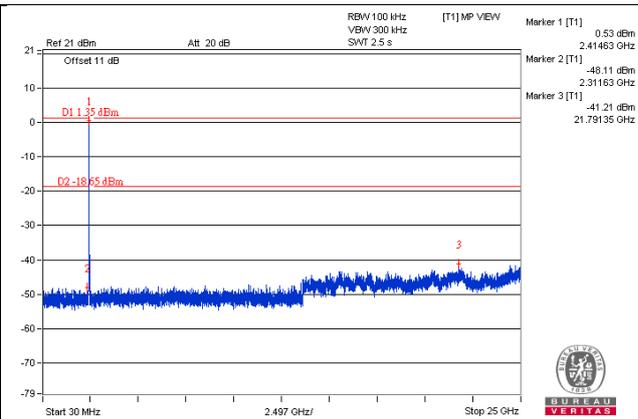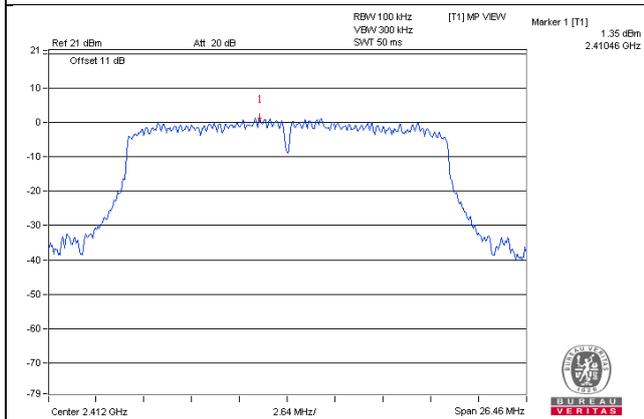


CH 6

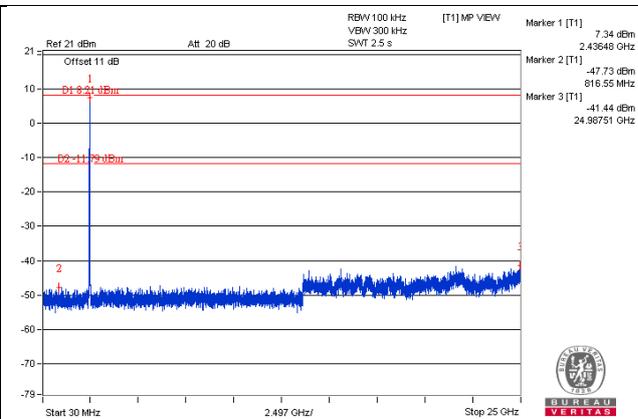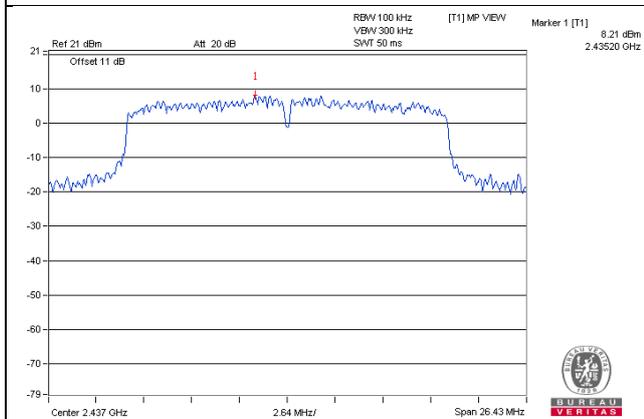


CH 11

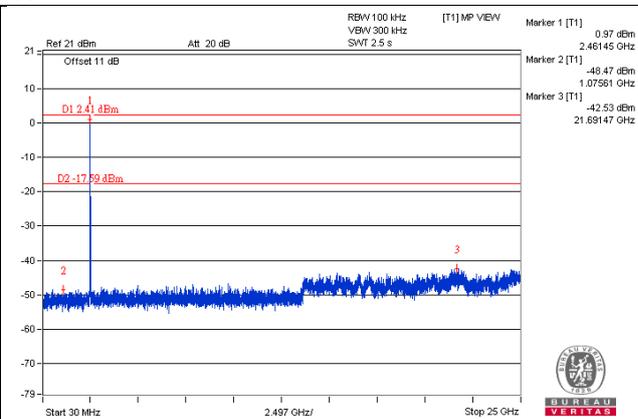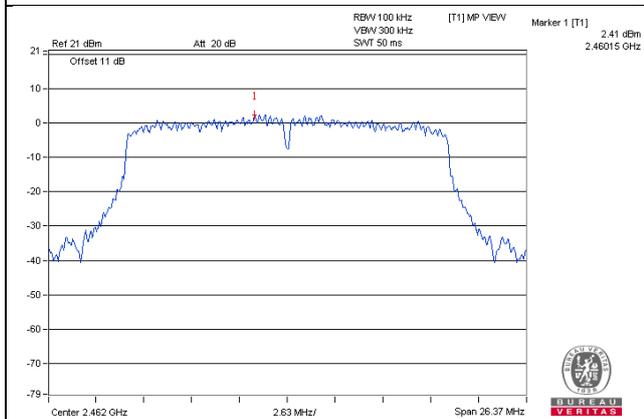

CH 1 Band edge

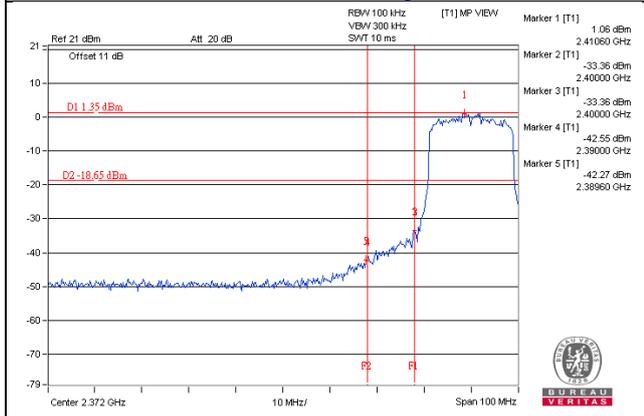

CH 11 Band edge

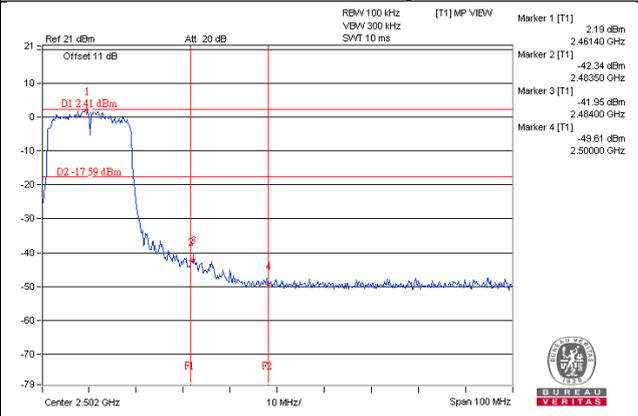

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---