

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (26-tone RU)

RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	42.6	33.9	31.8	5.5	33.5	0.3	46.3	37.9	68.2	53.9	21.9	16.0	*1)
Hori.	5470.0	44.3	-	31.8	5.5	33.5	-	48.1	-	68.2	-	20.1	-	
Vert.	5460.0	42.7	33.9	31.8	5.5	33.5	0.3	46.4	37.9	68.2	53.9	21.8	16.0	*1)
Vert.	5470.0	42.7	-	31.8	5.5	33.5	-	46.5	-	68.2	-	21.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log(3.65 m / 3.0 m) = 1.71 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
Mode	(1 GHz - 10 GHz) Tx 11ax-40 5510 MHz (26-tone RU)

RU Index 0

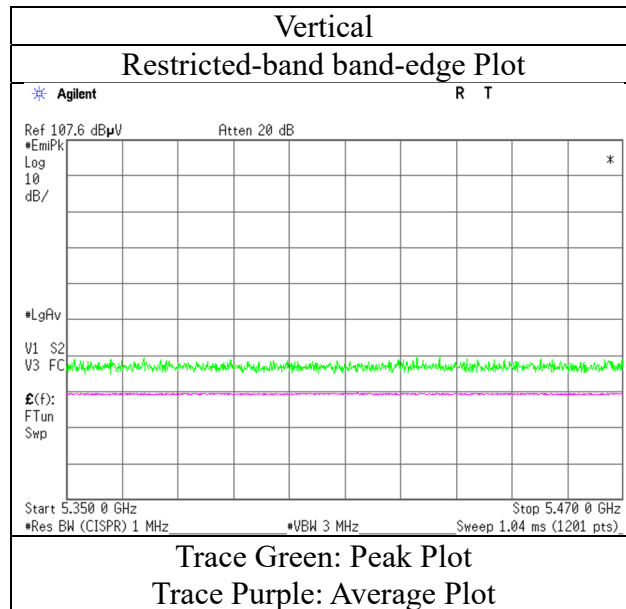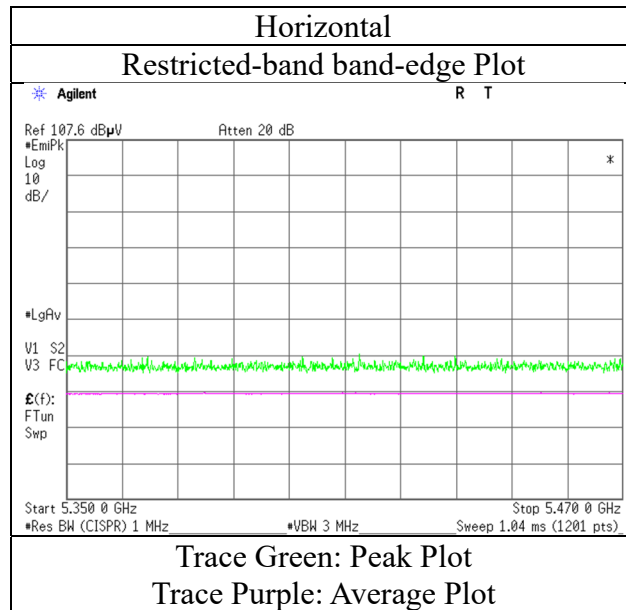

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (52-tone RU)

RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	42.7	34.1	31.8	5.5	33.5	0.2	46.4	38.1	68.2	53.9	21.8	15.8	*1)
Hori.	5470.0	43.0	-	31.8	5.5	33.5	-	46.8	-	68.2	-	21.4	-	
Vert.	5460.0	43.7	34.0	31.8	5.5	33.5	0.2	47.4	38.0	68.2	53.9	20.8	15.9	*1)
Vert.	5470.0	42.7	-	31.8	5.5	33.5	-	46.5	-	68.2	-	21.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (106-tone RU)

RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	43.0	34.3	31.8	5.5	33.5	0.3	46.8	38.3	68.2	53.9	21.4	15.6	*1)
Hori.	5470.0	43.7	-	31.8	5.5	33.5	-	47.5	-	68.2	-	20.7	-	
Vert.	5460.0	42.5	34.0	31.8	5.5	33.5	0.3	46.3	38.0	68.2	53.9	21.9	15.9	*1)
Vert.	5470.0	42.9	-	31.8	5.5	33.5	-	46.7	-	68.2	-	21.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log(3.65 m / 3.0 m) = 1.71 dB

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
Mode	(1 GHz - 10 GHz) Tx 11ax-40 5510 MHz (106-tone RU)

RU Index 53

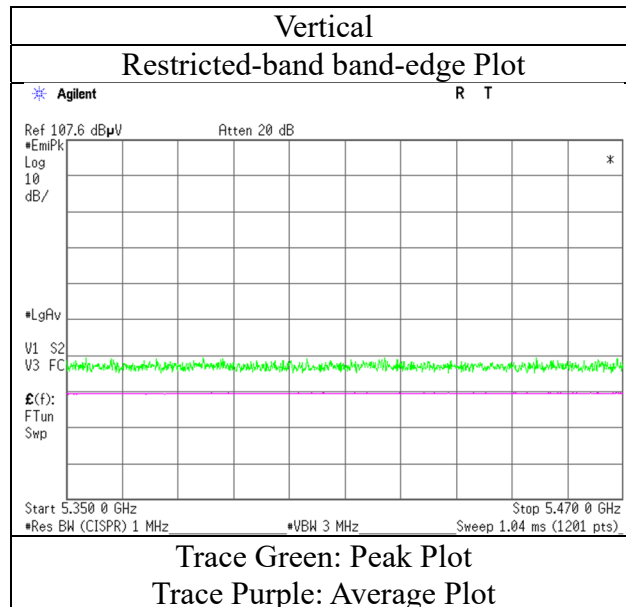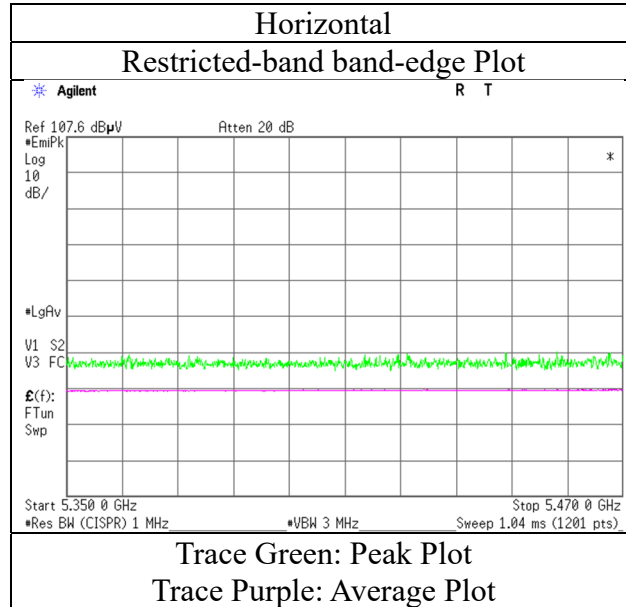

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (242-tone RU)

RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	43.5	35.2	31.8	5.5	33.5	0.3	47.3	39.2	68.2	53.9	20.9	14.7	*1)
Hori.	5470.0	44.1	-	31.8	5.5	33.5	-	47.9	-	68.2	-	20.3	-	
Vert.	5460.0	43.0	34.3	31.8	5.5	33.5	0.3	46.8	38.3	68.2	53.9	21.4	15.6	*1)
Vert.	5470.0	43.4	-	31.8	5.5	33.5	-	47.2	-	68.2	-	21.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
Mode	(1 GHz - 10 GHz) Tx 11ax-40 5510 MHz (242-tone RU)

RU Index 61

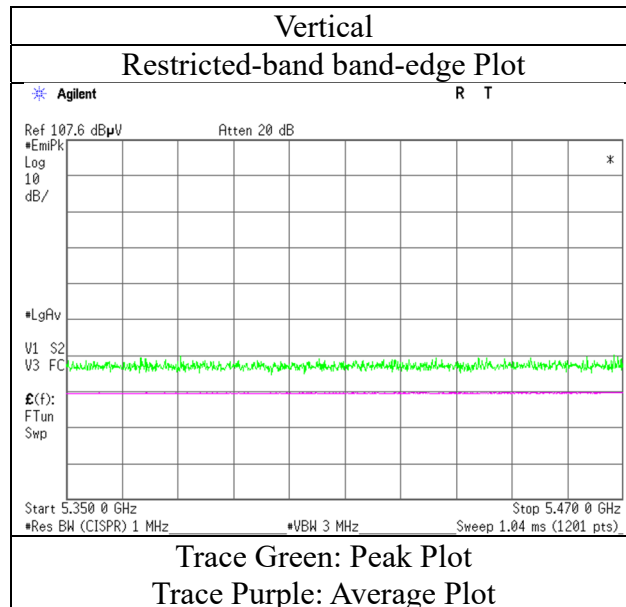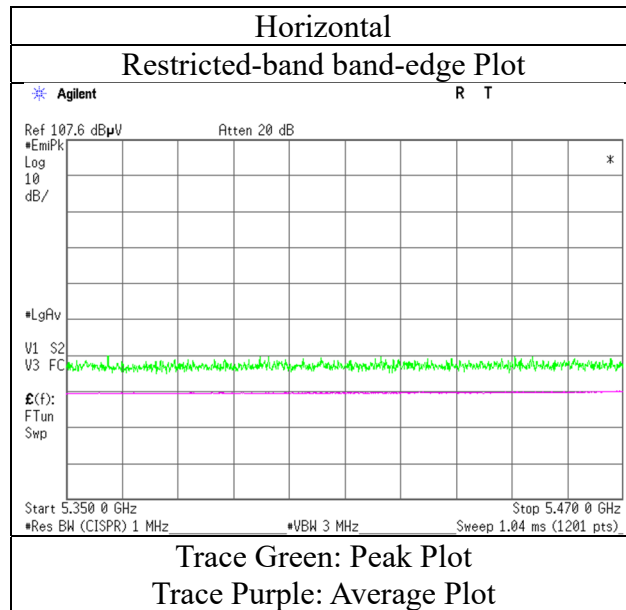

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	47.0	37.2	31.8	5.5	33.5	0.3	50.7	41.2	68.2	53.9	17.5	12.7	*1)
Hori.	5470.0	48.2	-	31.8	5.5	33.5	-	52.0	-	68.2	-	16.3	-	
Vert.	5460.0	44.0	35.3	31.8	5.5	33.5	0.3	47.8	39.3	68.2	53.9	20.4	14.6	*1)
Vert.	5470.0	46.3	-	31.8	5.5	33.5	-	50.0	-	68.2	-	18.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
Mode	(1 GHz - 10 GHz) Tx 11ax-40 5510 MHz (484-tone RU)

RU Index 65

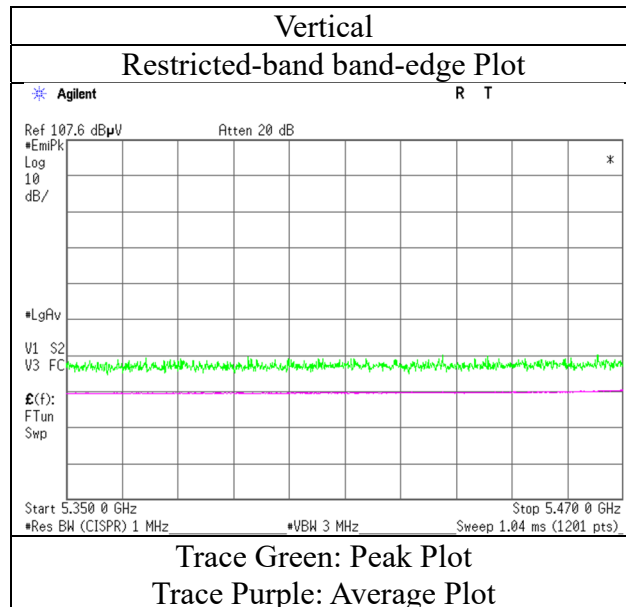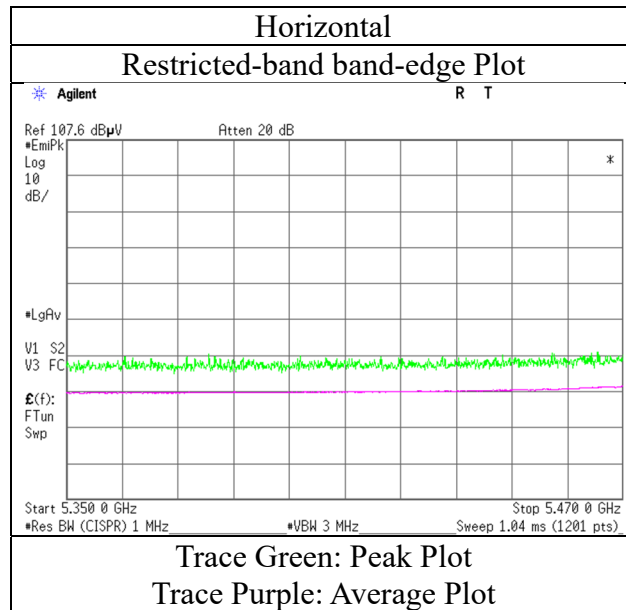

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (26-tone RU)

RU Index 17

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	43.4	-	31.9	5.6	33.5	-	47.4	-	68.2	-	20.8	-	
Vert.	5725.0	42.0	-	31.9	5.6	33.5	-	46.0	-	68.2	-	22.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (26-tone RU)

RU Index 17

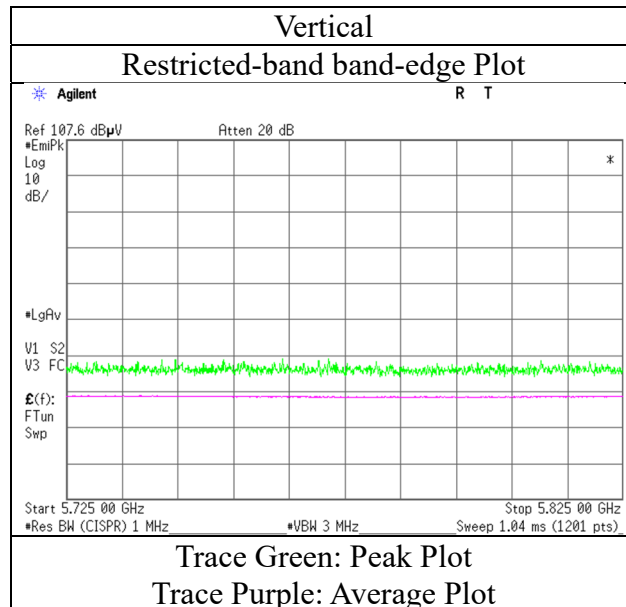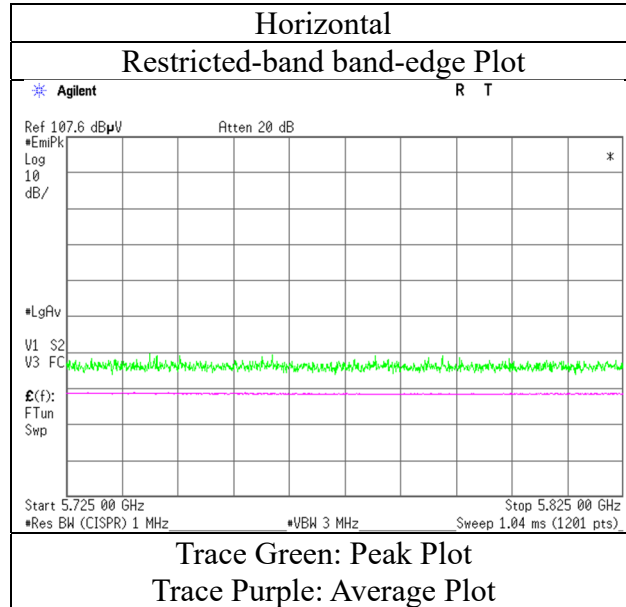

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.
Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (52-tone RU)

RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	42.7	-	31.9	5.6	33.5	-	46.7	-	68.2	-	21.5	-	
Vert.	5725.0	42.3	-	31.9	5.6	33.5	-	46.3	-	68.2	-	21.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (106-tone RU)

RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	42.9	-	31.9	5.6	33.5	-	46.9	-	68.2	-	21.4	-	
Vert.	5725.0	43.1	-	31.9	5.6	33.5	-	47.1	-	68.2	-	21.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (106-tone RU)

RU Index 56

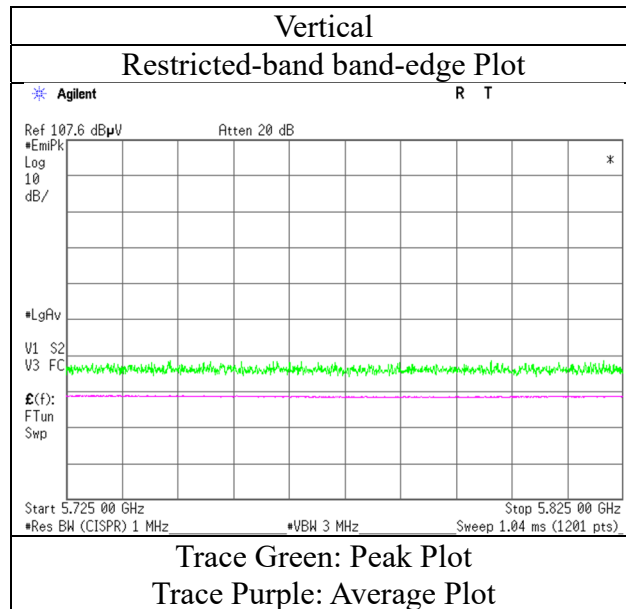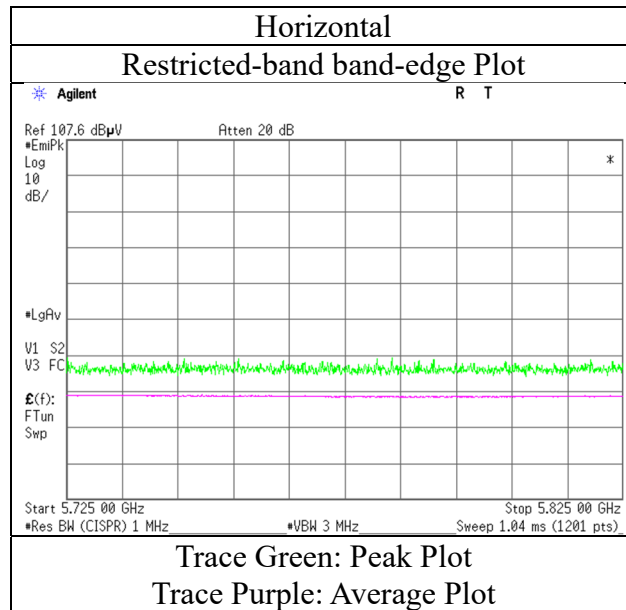

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (242-tone RU)

RU Index 62

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	43.9	-	31.9	5.6	33.5	-	47.9	-	68.2	-	20.3	-	
Vert.	5725.0	43.9	-	31.9	5.6	33.5	-	47.9	-	68.2	-	20.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 20, 2022
Temperature / Humidity	24 deg. C / 41 % RH
Engineer	Takeshi Hiyaji
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	45.0	-	31.9	5.6	33.5	-	49.0	-	68.2	-	19.2	-	
Vert.	5725.0	44.1	-	31.9	5.6	33.5	-	48.1	-	68.2	-	20.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (26-tone RU)

RU Index 0

Polarity	Frequency	Reading	Reading	Ant.	Loss	Gain	Duty	Result	Result	Limit	Limit	Margin	Margin	Remark
[Hori/Vert]	[MHz]	(QP / PK)	(AV)	Factor			Factor	(QP / PK)	(AV)	(QP / PK)	(AV)	(QP / PK)	(AV)	
		[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	42.6	-	31.8	5.6	33.5	-	46.4	-	68.2	-	21.8	-	
Hori.	5700.0	42.7	-	31.9	5.6	33.5	-	46.6	-	105.2	-	58.6	-	
Hori.	5720.0	43.5	-	31.9	5.6	33.5	-	47.5	-	110.8	-	63.3	-	
Hori.	5725.0	44.4	-	31.9	5.6	33.5	-	48.4	-	122.2	-	73.8	-	
Vert.	5650.0	42.2	-	31.8	5.6	33.5	-	46.0	-	68.2	-	22.2	-	
Vert.	5700.0	42.2	-	31.9	5.6	33.5	-	46.2	-	105.2	-	59.0	-	
Vert.	5720.0	42.6	-	31.9	5.6	33.5	-	46.6	-	110.8	-	64.2	-	
Vert.	5725.0	43.1	-	31.9	5.6	33.5	-	47.1	-	122.2	-	75.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date January 21, 2022
Temperature / Humidity 24 deg. C / 40 % RH
Engineer Yuta Moriya
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5755 MHz (26-tone RU)

RU Index 0

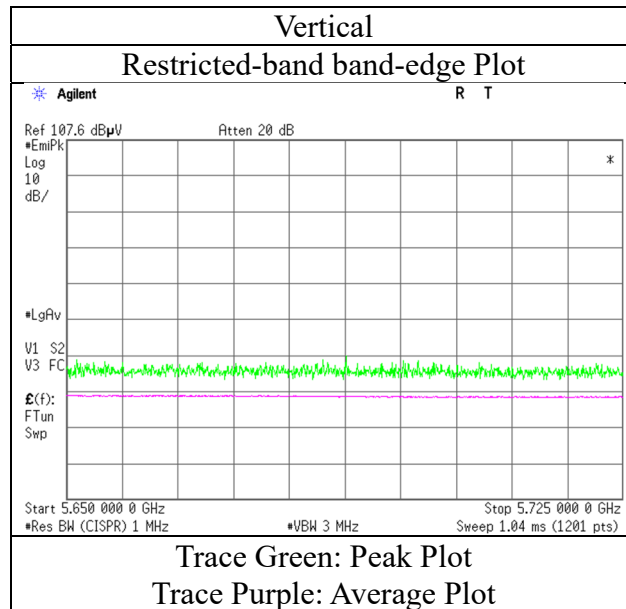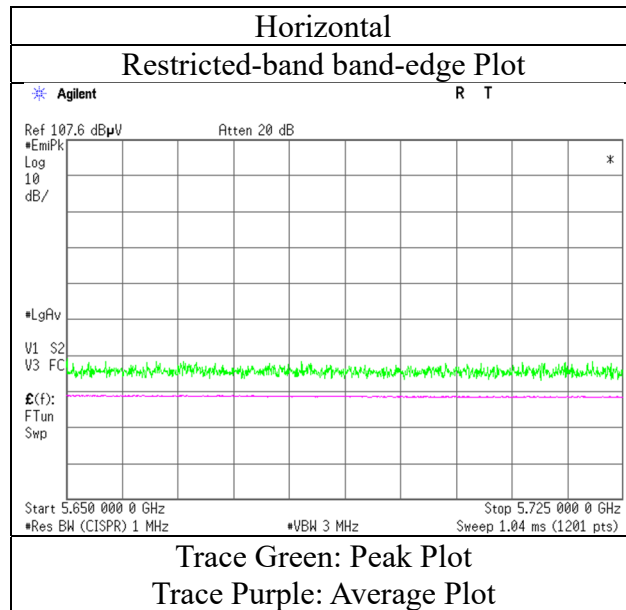

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (52-tone RU)

RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	42.0	-	31.8	5.6	33.5	-	45.9	-	68.2	-	22.3	-	
Hori.	5700.0	42.2	-	31.9	5.6	33.5	-	46.1	-	105.2	-	59.1	-	
Hori.	5720.0	42.3	-	31.9	5.6	33.5	-	46.3	-	110.8	-	64.6	-	
Hori.	5725.0	43.0	-	31.9	5.6	33.5	-	47.0	-	122.2	-	75.3	-	
Vert.	5650.0	42.2	-	31.8	5.6	33.5	-	46.1	-	68.2	-	22.1	-	
Vert.	5700.0	42.4	-	31.9	5.6	33.5	-	46.3	-	105.2	-	58.9	-	
Vert.	5720.0	42.9	-	31.9	5.6	33.5	-	46.9	-	110.8	-	63.9	-	
Vert.	5725.0	43.9	-	31.9	5.6	33.5	-	47.9	-	122.2	-	74.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (52-tone RU)

RU Index 37

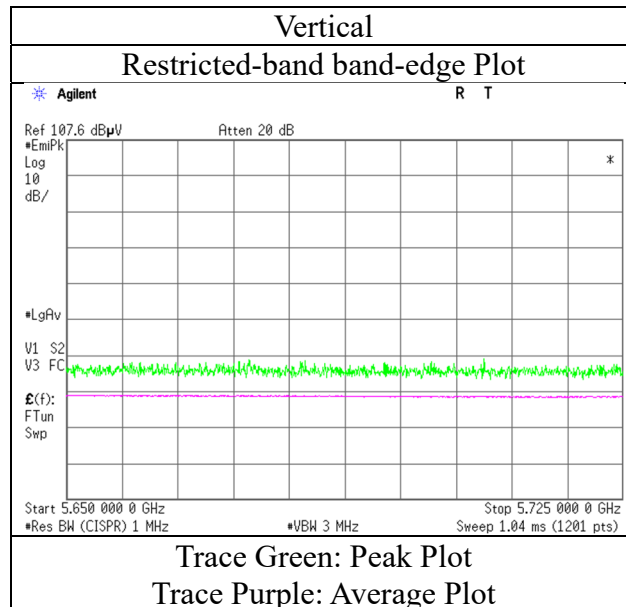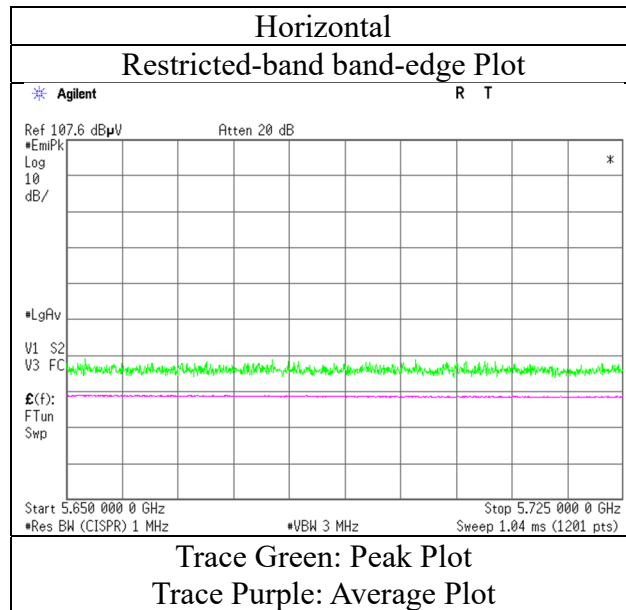

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (106-tone RU)

RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	43.0	-	31.8	5.6	33.5	-	46.9	-	68.2	-	21.3	-	
Hori.	5700.0	43.4	-	31.9	5.6	33.5	-	47.3	-	105.2	-	57.9	-	
Hori.	5720.0	43.5	-	31.9	5.6	33.5	-	47.5	-	110.8	-	63.3	-	
Hori.	5725.0	46.9	-	31.9	5.6	33.5	-	50.9	-	122.2	-	71.3	-	
Vert.	5650.0	42.3	-	31.8	5.6	33.5	-	46.2	-	68.2	-	22.0	-	
Vert.	5700.0	42.4	-	31.9	5.6	33.5	-	46.3	-	105.2	-	58.9	-	
Vert.	5720.0	42.5	-	31.9	5.6	33.5	-	46.5	-	110.8	-	64.3	-	
Vert.	5725.0	43.1	-	31.9	5.6	33.5	-	47.1	-	122.2	-	75.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date January 21, 2022
Temperature / Humidity 24 deg. C / 40 % RH
Engineer Yuta Moriya
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5755 MHz (106-tone RU)

RU Index 53

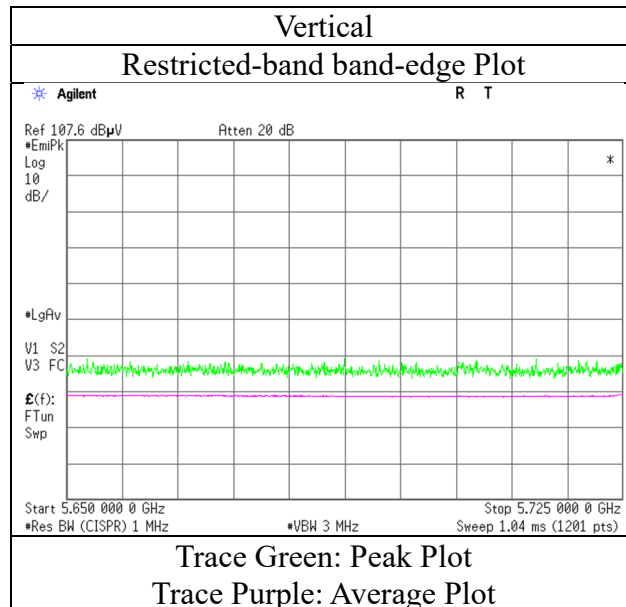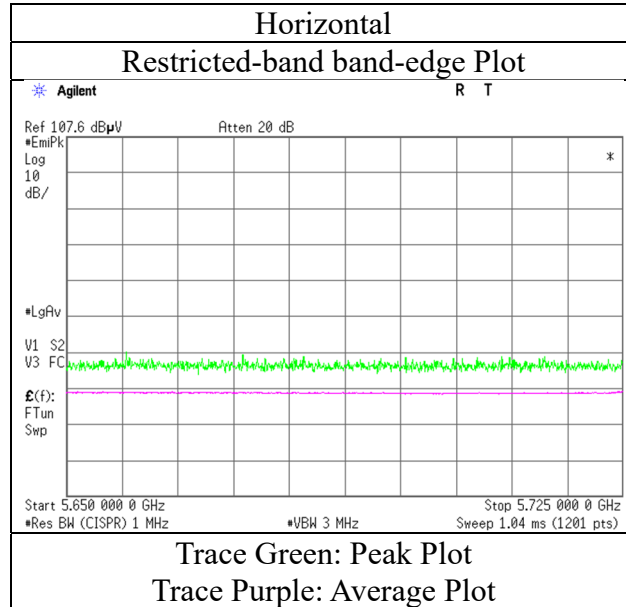

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (242-tone RU)

RU Index 61

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5650.0	43.6	-	31.8	5.6	33.5	-	47.4	-	68.2	-	20.8	-	
Hori.	5700.0	44.3	-	31.9	5.6	33.5	-	48.2	-	105.2	-	57.0	-	
Hori.	5720.0	46.7	-	31.9	5.6	33.5	-	50.7	-	110.8	-	60.1	-	
Hori.	5725.0	50.0	-	31.9	5.6	33.5	-	54.0	-	122.2	-	68.2	-	
Vert.	5650.0	43.5	-	31.8	5.6	33.5	-	47.3	-	68.2	-	20.9	-	
Vert.	5700.0	43.7	-	31.9	5.6	33.5	-	47.6	-	105.2	-	57.6	-	
Vert.	5720.0	48.1	-	31.9	5.6	33.5	-	52.1	-	110.8	-	58.7	-	
Vert.	5725.0	48.2	-	31.9	5.6	33.5	-	52.2	-	122.2	-	70.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (242-tone RU)

RU Index 61

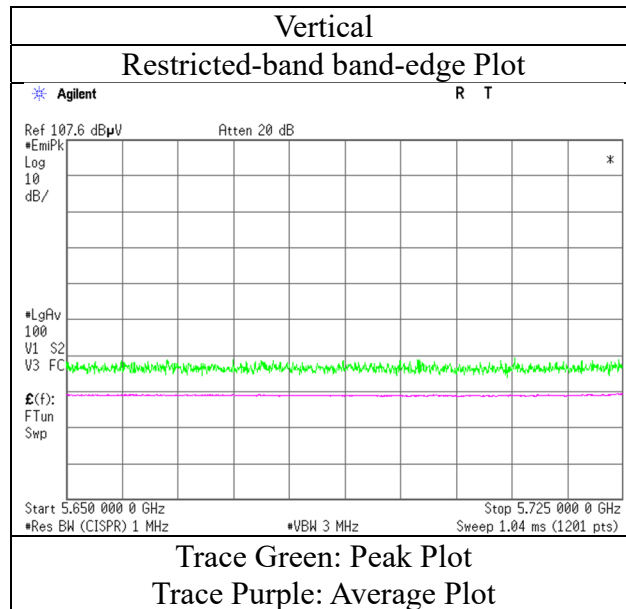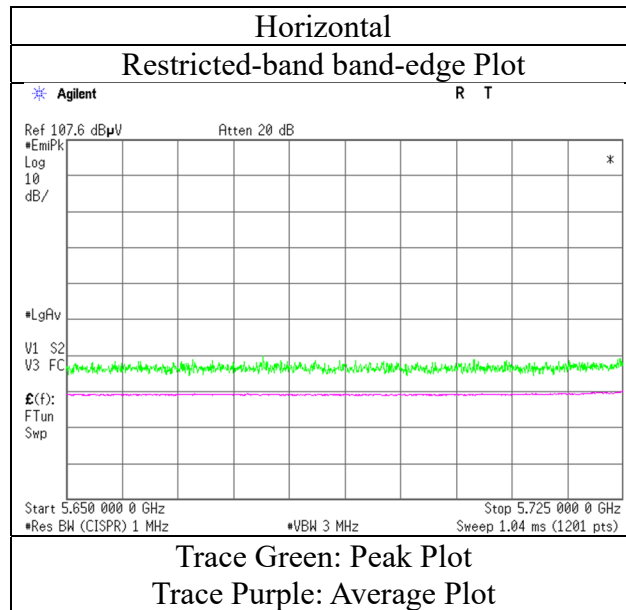

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (484-tone RU)

RU Index 65

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5650.0	43.6	-	31.8	5.6	33.5	-	47.4	-	68.2	-	20.8	-	
Hori.	5700.0	44.3	-	31.9	5.6	33.5	-	48.2	-	105.2	-	57.0	-	
Hori.	5720.0	46.7	-	31.9	5.6	33.5	-	50.7	-	110.8	-	60.1	-	
Hori.	5725.0	50.0	-	31.9	5.6	33.5	-	54.0	-	122.2	-	68.2	-	
Vert.	5650.0	43.5	-	31.8	5.6	33.5	-	47.3	-	68.2	-	20.9	-	
Vert.	5700.0	45.2	-	31.9	5.6	33.5	-	49.1	-	105.2	-	56.1	-	
Vert.	5720.0	50.5	-	31.9	5.6	33.5	-	54.5	-	110.8	-	56.3	-	
Vert.	5725.0	54.0	-	31.9	5.6	33.5	-	58.0	-	122.2	-	64.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (484-tone RU)

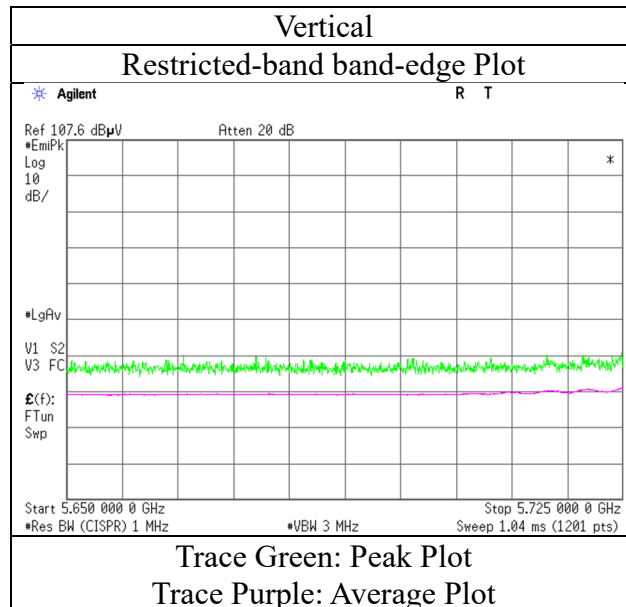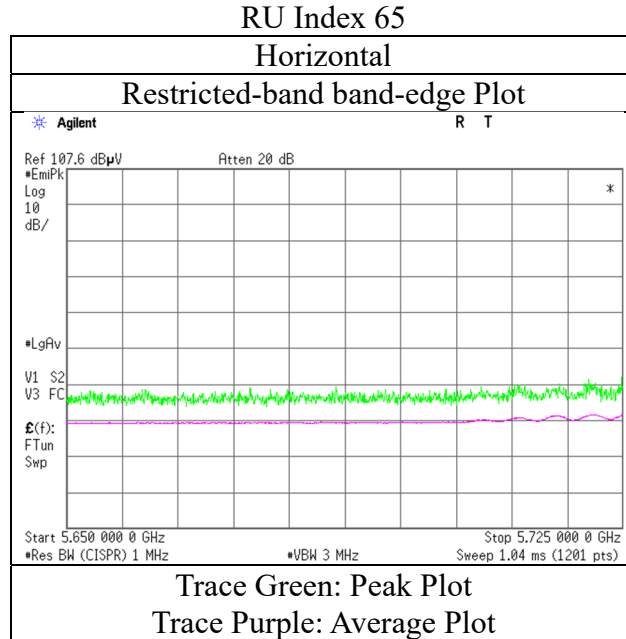

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (26-tone RU)

RU Index 17

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	43.6	-	32.2	5.7	33.5	-	47.9	-	122.2	-	74.3	-	
Hori.	5855.0	43.4	-	32.2	5.7	33.5	-	47.8	-	110.8	-	63.1	-	
Hori.	5875.0	43.0	-	32.2	5.7	33.5	-	47.3	-	105.2	-	57.9	-	
Hori.	5925.0	42.6	-	32.3	5.7	33.5	-	47.1	-	68.2	-	21.1	-	
Vert.	5850.0	43.7	-	32.2	5.7	33.5	-	48.0	-	122.2	-	74.2	-	
Vert.	5855.0	43.7	-	32.2	5.7	33.5	-	48.0	-	110.8	-	62.8	-	
Vert.	5875.0	42.8	-	32.2	5.7	33.5	-	47.2	-	105.2	-	58.0	-	
Vert.	5925.0	42.6	-	32.3	5.7	33.5	-	47.0	-	68.2	-	21.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (52-tone RU)

RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	43.6	-	32.2	5.7	33.5	-	47.9	-	122.2	-	74.3	-	
Hori.	5855.0	43.3	-	32.2	5.7	33.5	-	47.7	-	110.8	-	63.2	-	
Hori.	5875.0	42.9	-	32.2	5.7	33.5	-	47.2	-	105.2	-	58.0	-	
Hori.	5925.0	42.5	-	32.3	5.7	33.5	-	47.0	-	68.2	-	21.2	-	
Vert.	5850.0	43.9	-	32.2	5.7	33.5	-	48.2	-	122.2	-	74.0	-	
Vert.	5855.0	43.7	-	32.2	5.7	33.5	-	48.0	-	110.8	-	62.8	-	
Vert.	5875.0	43.2	-	32.2	5.7	33.5	-	47.6	-	105.2	-	57.6	-	
Vert.	5925.0	42.8	-	32.3	5.7	33.5	-	47.2	-	68.2	-	21.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date January 21, 2022
Temperature / Humidity 24 deg. C / 40 % RH
Engineer Yuta Moriya
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5795 MHz (52-tone RU)

RU Index 44

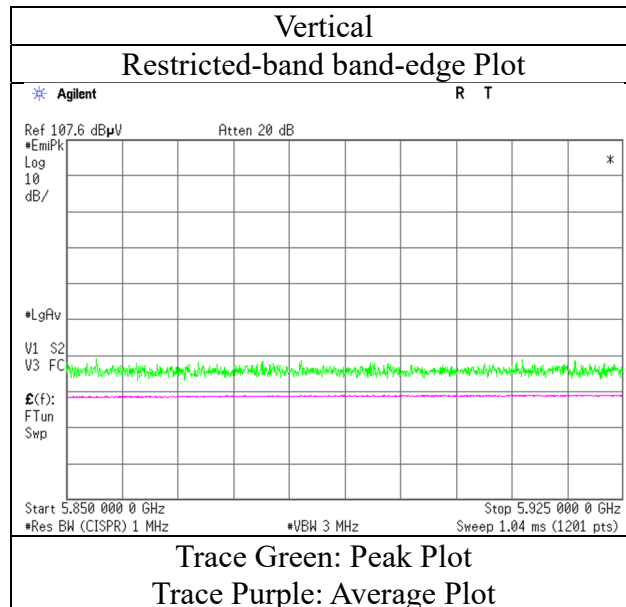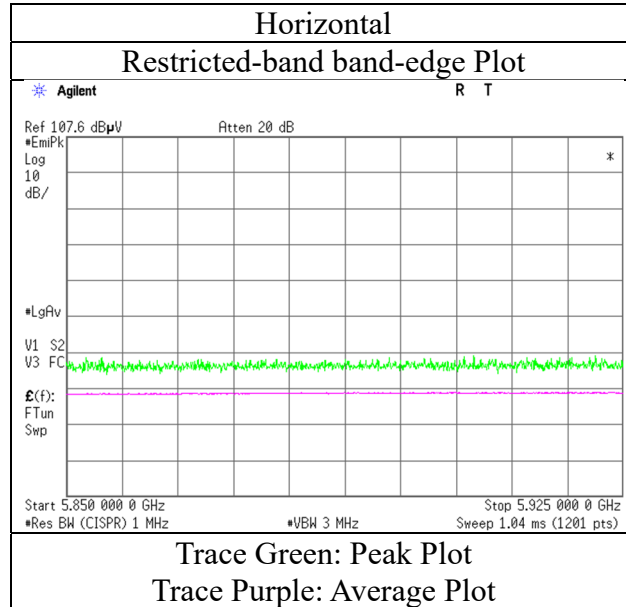

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (106-tone RU)

RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	42.7	-	32.2	5.7	33.5	-	47.1	-	122.2	-	75.2	-	
Hori.	5855.0	42.5	-	32.2	5.7	33.5	-	46.8	-	110.8	-	64.0	-	
Hori.	5875.0	42.4	-	32.2	5.7	33.5	-	46.7	-	105.2	-	58.5	-	
Hori.	5925.0	41.8	-	32.3	5.7	33.5	-	46.2	-	68.2	-	22.0	-	
Vert.	5850.0	43.1	-	32.2	5.7	33.5	-	47.4	-	122.2	-	74.8	-	
Vert.	5855.0	42.9	-	32.2	5.7	33.5	-	47.2	-	110.8	-	63.6	-	
Vert.	5875.0	42.5	-	32.2	5.7	33.5	-	46.8	-	105.2	-	58.4	-	
Vert.	5925.0	42.2	-	32.3	5.7	33.5	-	46.6	-	68.2	-	21.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (106-tone RU)

RU Index 56

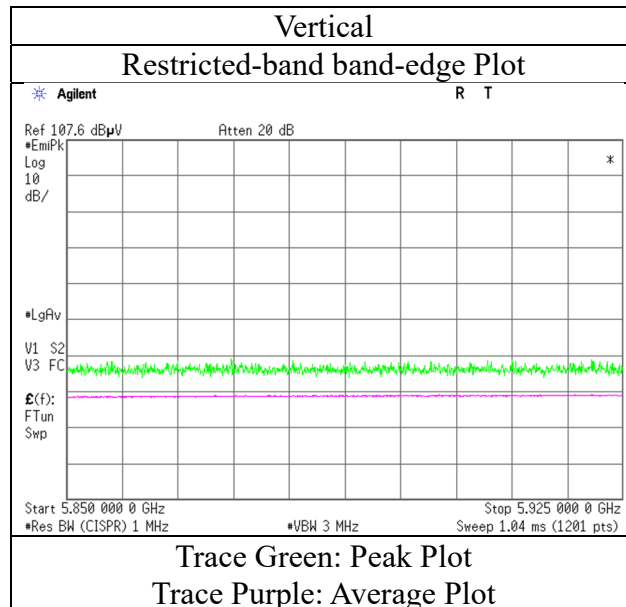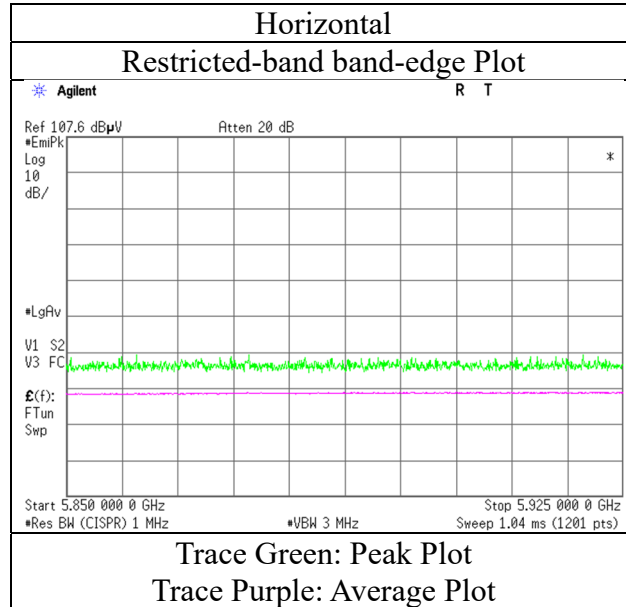

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (242-tone RU)

RU Index 62

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5850.0	43.2	-	32.2	5.7	33.5	-	47.5	-	122.2	-	74.7	-	
Hori.	5855.0	42.7	-	32.2	5.7	33.5	-	47.0	-	110.8	-	63.8	-	
Hori.	5875.0	42.6	-	32.2	5.7	33.5	-	46.9	-	105.2	-	58.3	-	
Hori.	5925.0	42.2	-	32.3	5.7	33.5	-	46.6	-	68.2	-	21.6	-	
Vert.	5850.0	43.5	-	32.2	5.7	33.5	-	47.8	-	122.2	-	74.4	-	
Vert.	5855.0	42.7	-	32.2	5.7	33.5	-	47.0	-	110.8	-	63.8	-	
Vert.	5875.0	43.0	-	32.2	5.7	33.5	-	47.3	-	105.2	-	57.9	-	
Vert.	5925.0	42.9	-	32.3	5.7	33.5	-	47.3	-	68.2	-	20.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date January 21, 2022
Temperature / Humidity 24 deg. C / 40 % RH
Engineer Yuta Moriya
 (1 GHz - 10 GHz)
Mode Tx 11ax-40 5795 MHz (242-tone RU)

RU Index 62

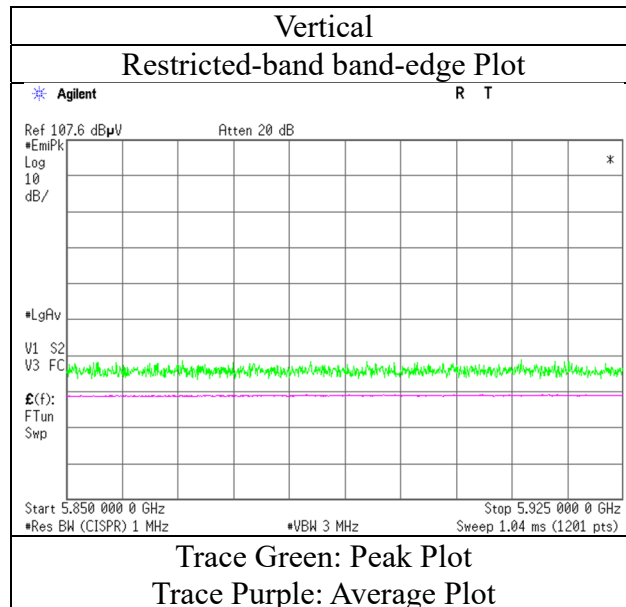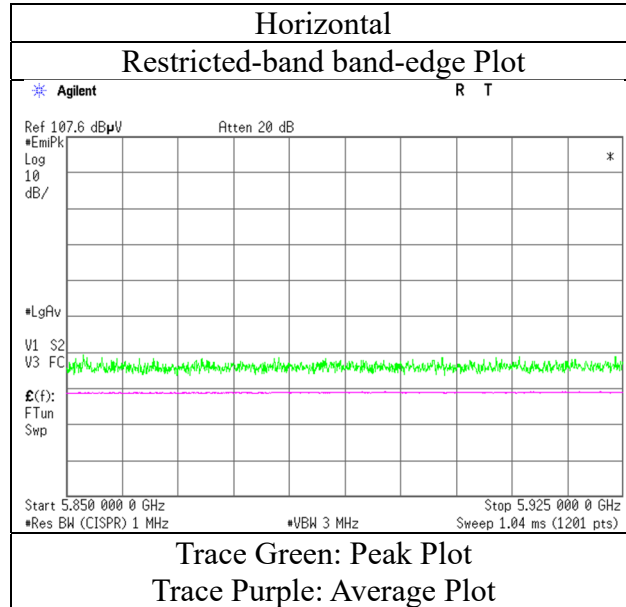

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 21, 2022
Temperature / Humidity	24 deg. C / 40 % RH
Engineer	Yuta Moriya
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (484-tone RU)

RU Index 65

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5850.0	44.0	-	32.2	5.7	33.5	-	48.3	-	122.2	-	73.9	-	
Hori.	5855.0	43.6	-	32.2	5.7	33.5	-	48.0	-	110.8	-	62.8	-	
Hori.	5875.0	43.6	-	32.2	5.7	33.5	-	47.9	-	105.2	-	57.3	-	
Hori.	5925.0	42.8	-	32.3	5.7	33.5	-	47.2	-	68.2	-	21.0	-	
Vert.	5850.0	46.0	-	32.2	5.7	33.5	-	50.3	-	122.2	-	71.9	-	
Vert.	5855.0	45.1	-	32.2	5.7	33.5	-	49.4	-	110.8	-	61.4	-	
Vert.	5875.0	43.5	-	32.2	5.7	33.5	-	47.9	-	105.2	-	57.3	-	
Vert.	5925.0	43.4	-	32.3	5.7	33.5	-	47.9	-	68.2	-	20.4	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (26-tone RU)

RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	43.7	34.3	31.7	5.4	33.7	0.3	47.1	37.9	73.9	53.9	26.8	16.0	*1)
Vert.	5150.0	43.8	34.4	31.7	5.4	33.7	0.3	47.2	38.1	73.9	53.9	26.7	15.8	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5210 MHz (26-tone RU)

RU Index 0

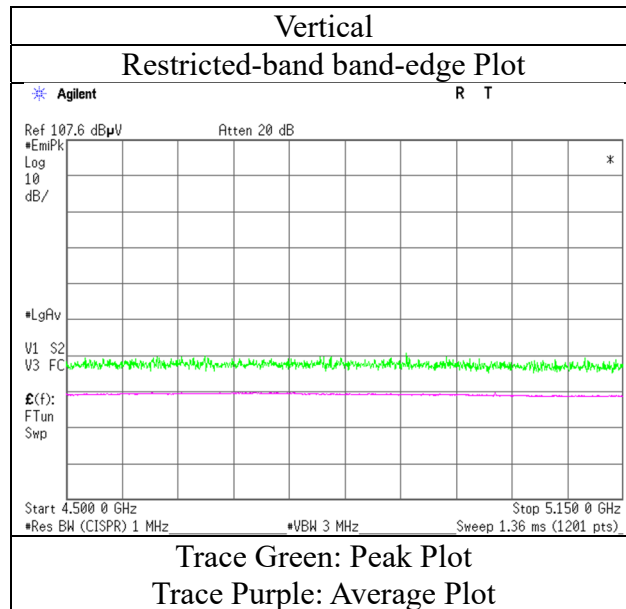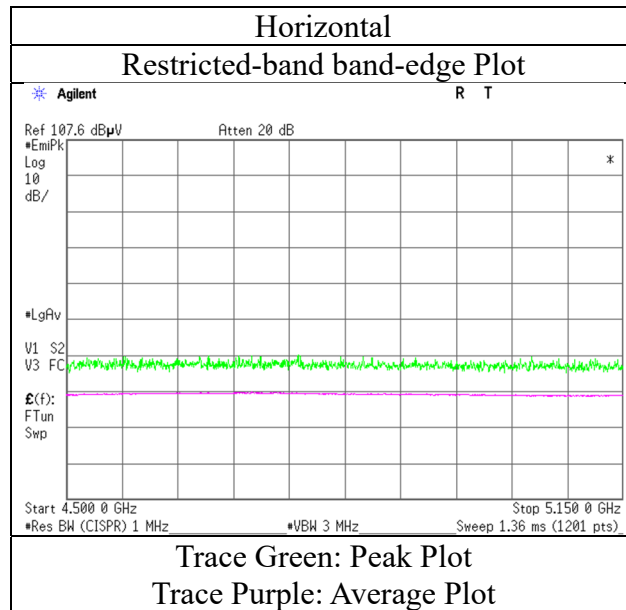

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (52-tone RU)

RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	42.9	34.3	31.7	5.4	33.7	0.3	46.3	38.0	73.9	53.9	27.6	15.9	*1)
Vert.	5150.0	43.2	34.5	31.7	5.4	33.7	0.3	46.6	38.1	73.9	53.9	27.3	15.8	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5210 MHz (52-tone RU)

RU Index 37

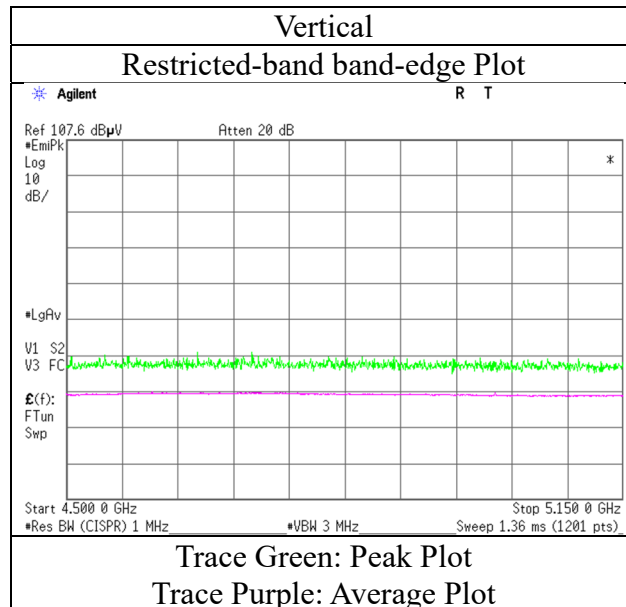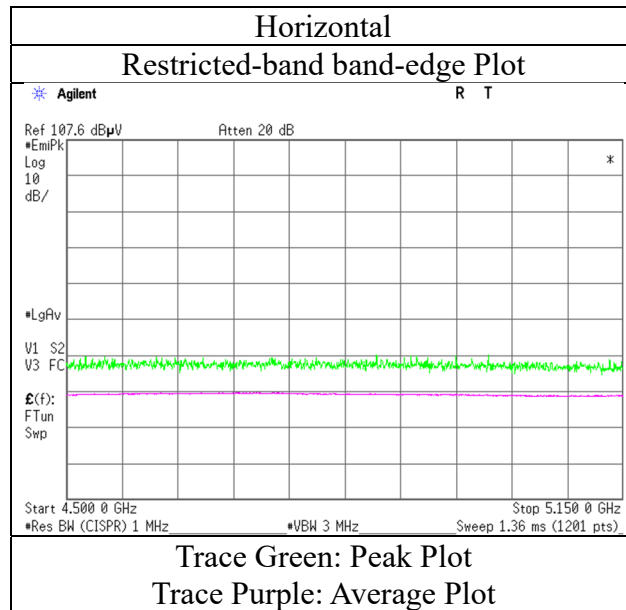

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (106-tone RU)

RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	42.8	34.3	31.7	5.4	33.7	0.3	46.3	38.0	73.9	53.9	27.6	15.9	*1)
Vert.	5150.0	42.9	34.5	31.7	5.4	33.7	0.3	46.3	38.1	73.9	53.9	27.6	15.8	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5210 MHz (106-tone RU)

RU Index 53

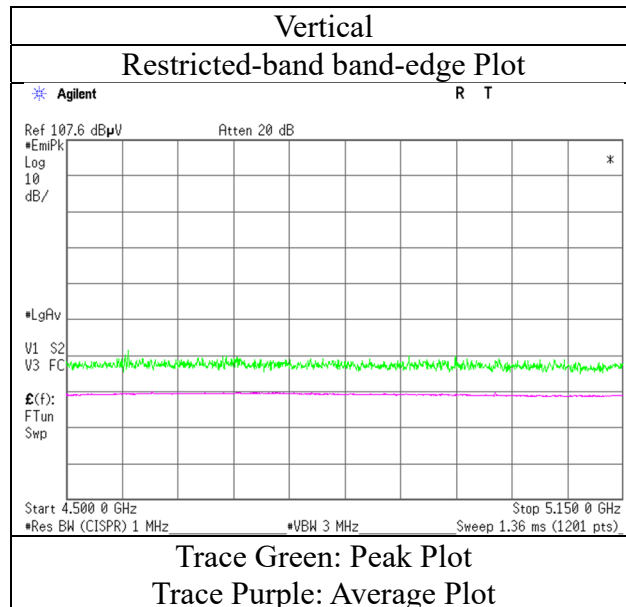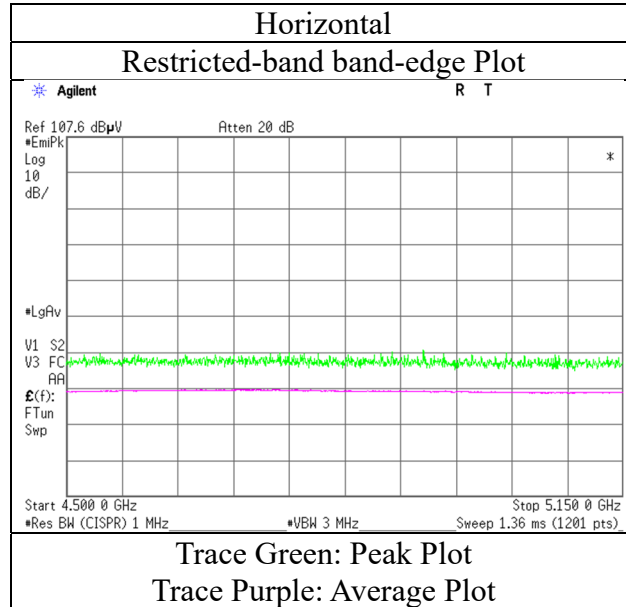

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (242-tone RU)

RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	43.7	34.7	31.7	5.4	33.7	0.3	47.1	38.4	73.9	53.9	26.8	15.6	*1)
Vert.	5150.0	44.4	35.0	31.7	5.4	33.7	0.3	47.8	38.7	73.9	53.9	26.1	15.2	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date January 22, 2022
Temperature / Humidity 22 deg. C / 41 % RH
Engineer Takumi Nishida
 (1 GHz - 10 GHz)
Mode Tx 11ax-80 5210 MHz (242-tone RU)

RU Index 61

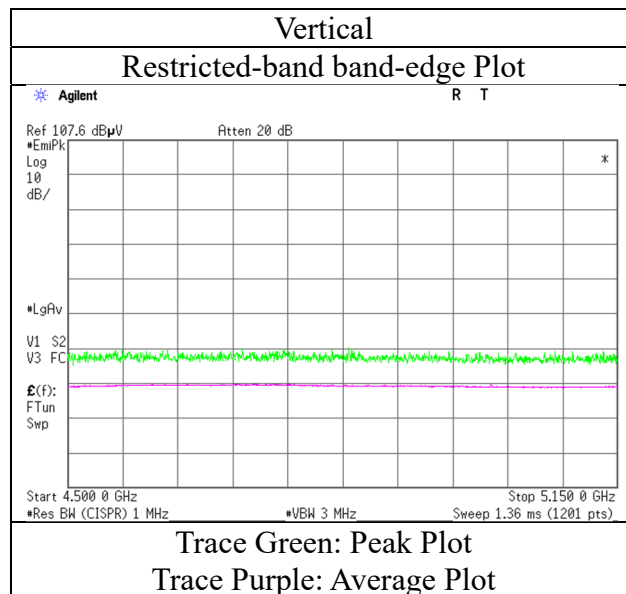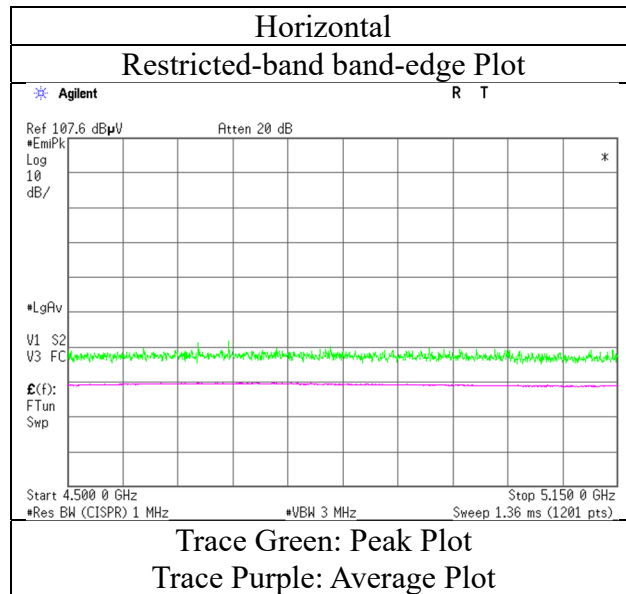

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (484-tone RU)

RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	45.0	35.9	31.7	5.4	33.7	0.3	48.4	39.6	73.9	53.9	25.5	14.4	*1)
Vert.	5150.0	44.9	35.7	31.7	5.4	33.7	0.3	48.3	39.3	73.9	53.9	25.6	14.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$


Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5210 MHz (484-tone RU)

RU Index 65

Horizontal


Restricted-band band-edge Plot

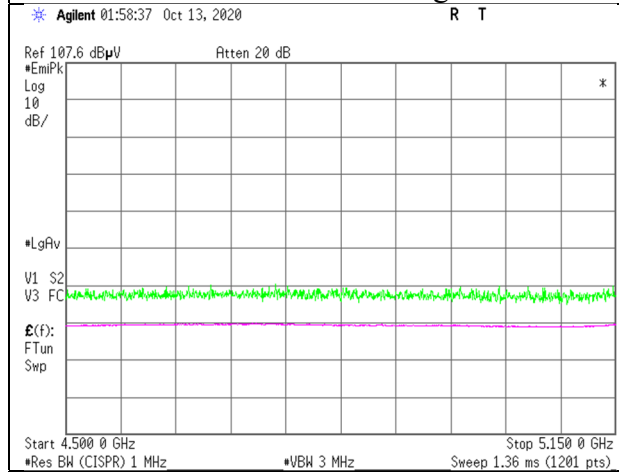

Trace Green: Peak Plot
Trace Purple: Average Plot

Vertical

Restricted-band band-edge Plot

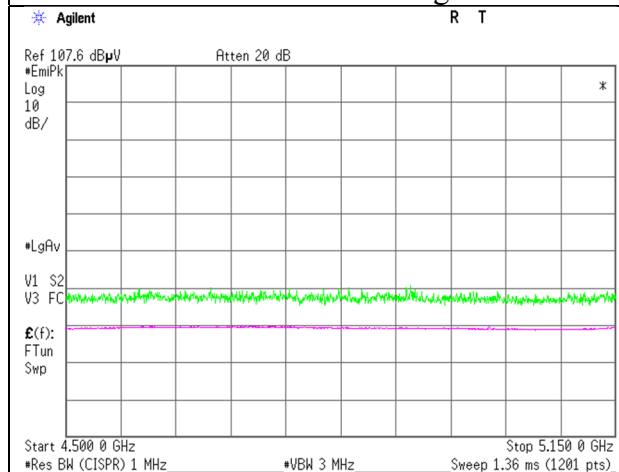

Trace Green: Peak Plot
Trace Purple: Average Plot

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (996-tone RU)

RU Index 67

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	48.6	38.1	31.7	5.4	33.7	0.3	52.0	41.8	73.9	53.9	21.9	12.1	*1)
Vert.	5150.0	47.0	37.3	31.7	5.4	33.7	0.3	50.4	41.0	73.9	53.9	23.5	13.0	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5210 MHz (996-tone RU)

RU Index 67

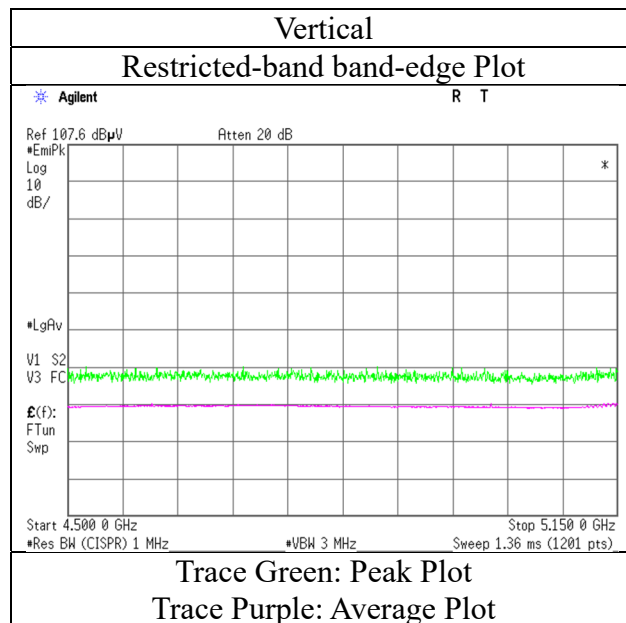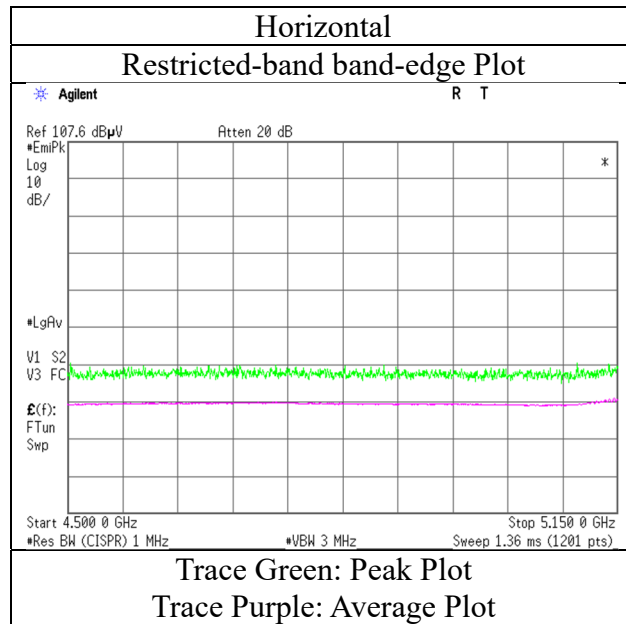

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (26-tone RU)

RU Index 36

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	43.1	34.6	31.6	5.5	33.6	0.3	46.5	38.3	73.9	53.9	27.4	15.7	*1)
Vert.	5350.0	43.3	34.9	31.6	5.5	33.6	0.3	46.8	38.6	73.9	53.9	27.1	15.3	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz 20log(3.65 m / 3.0 m) = 1.71 dB

Radiated Spurious Emission

Test place Ise EMC Lab.
Semi Anechoic Chamber No.2
Date January 22, 2022
Temperature / Humidity 22 deg. C / 41 % RH
Engineer Takumi Nishida
 (1 GHz - 10 GHz)
Mode Tx 11ax-80 5290 MHz (26-tone RU)

RU Index 36

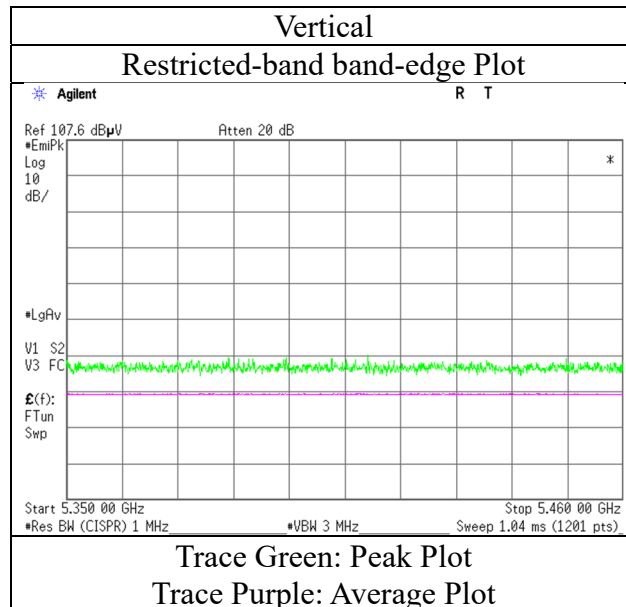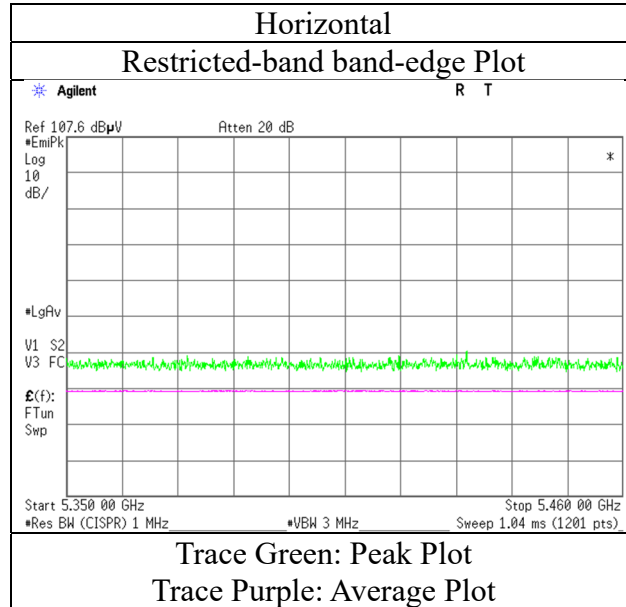

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (52-tone RU)

RU Index 52

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	43.6	34.8	31.6	5.5	33.6	0.3	47.0	38.5	73.9	53.9	26.9	15.4	*1)
Vert.	5350.0	43.3	34.8	31.6	5.5	33.6	0.3	46.8	38.4	73.9	53.9	27.1	15.5	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (106-tone RU)

RU Index 60

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5350.0	43.6	34.5	31.6	5.5	33.6	0.3	47.0	38.2	73.9	53.9	26.9	15.7	*1)
Vert.	5350.0	43.8	34.7	31.6	5.5	33.6	0.3	47.2	38.3	73.9	53.9	26.7	15.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5290 MHz (106-tone RU)

RU Index 60

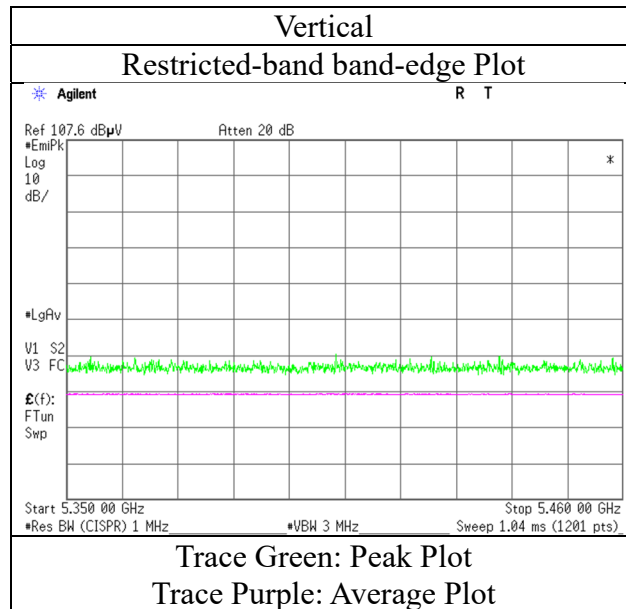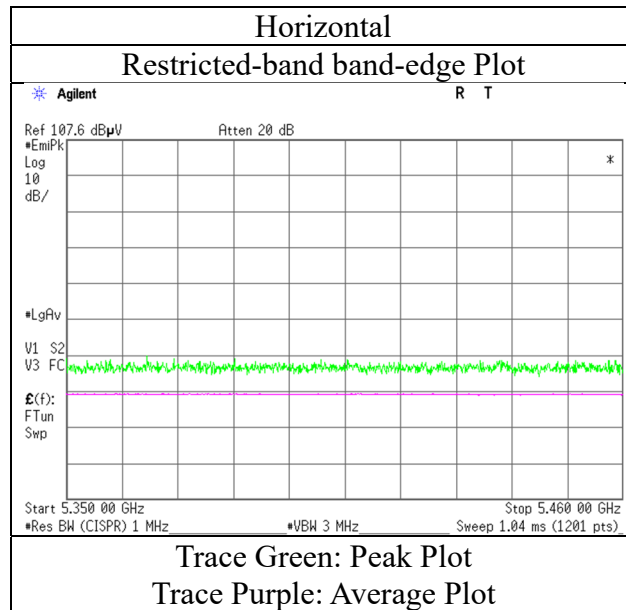

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (242-tone RU)

RU Index 64

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	43.5	34.6	31.6	5.5	33.6	0.3	46.9	38.3	73.9	53.9	27.0	15.6	*1)
Vert.	5350.0	44.0	35.0	31.6	5.5	33.6	0.3	47.4	38.7	73.9	53.9	26.5	15.2	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.



*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65 \text{ m} / 3.0 \text{ m}) = 1.71 \text{ dB}$

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
Mode	(1 GHz - 10 GHz) Tx 11ax-80 5290 MHz (242-tone RU)

RU Index 64

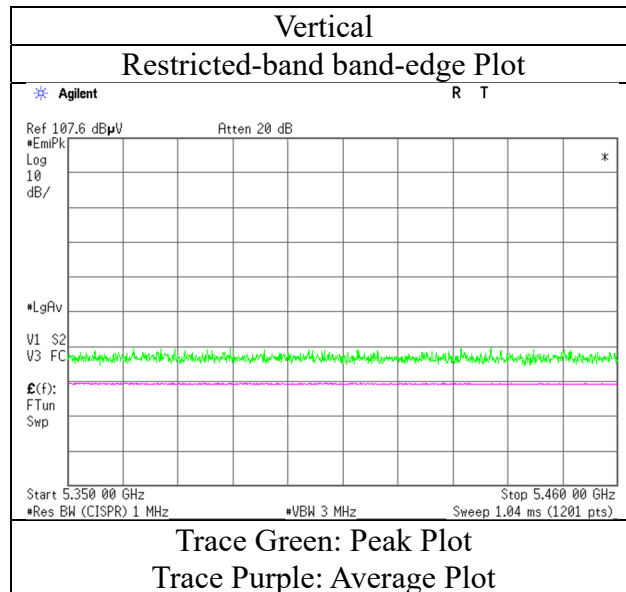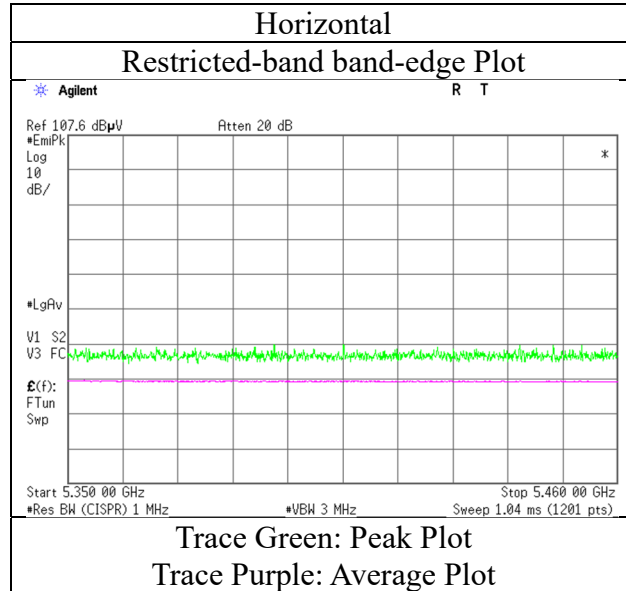

* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 22, 2022
Temperature / Humidity	22 deg. C / 41 % RH
Engineer	Takumi Nishida
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (484-tone RU)

RU Index 66

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5350.0	45.4	35.7	31.6	5.5	33.6	0.3	48.9	39.4	73.9	53.9	25.0	14.5	*1)
Vert.	5350.0	44.4	35.6	31.6	5.5	33.6	0.3	47.8	39.3	73.9	53.9	26.1	14.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

*QP detector was used up to 1GHz.

*1) Not Out of Band emission(Leakage Power)

Distance factor: 1 GHz - 10 GHz $20\log(3.65\text{ m} / 3.0\text{ m}) = 1.71\text{ dB}$