
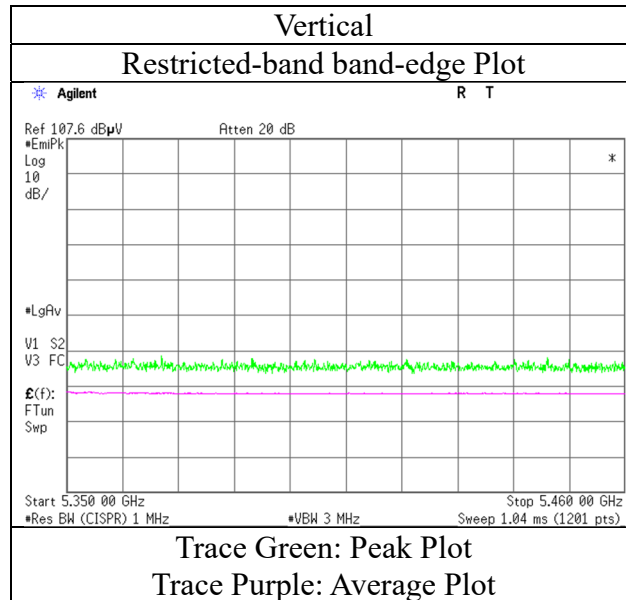


### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5310 MHz (484-tone RU)

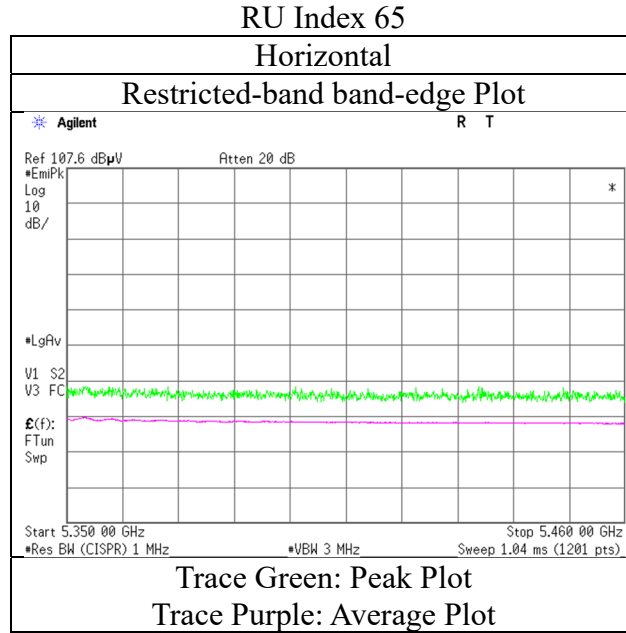

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (26-tone RU)

### RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	41.0	32.1	31.9	6.2	31.7	0.3	47.5	38.8	68.2	53.9	20.7	15.1	*1)
Hori.	5470.0	41.3	-	31.9	6.2	31.7	-	47.8	-	68.2	-	20.4	-	
Vert.	5460.0	40.5	32.0	31.9	6.2	31.7	0.3	47.0	38.7	68.2	53.9	21.2	15.2	*1)
Vert.	5470.0	40.4	-	31.9	6.2	31.7	-	46.9	-	68.2	-	21.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	20log(3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log(1.0 m / 3.0 m) = -9.5 dB

**Radiated Spurious Emission**

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (26-tone RU)

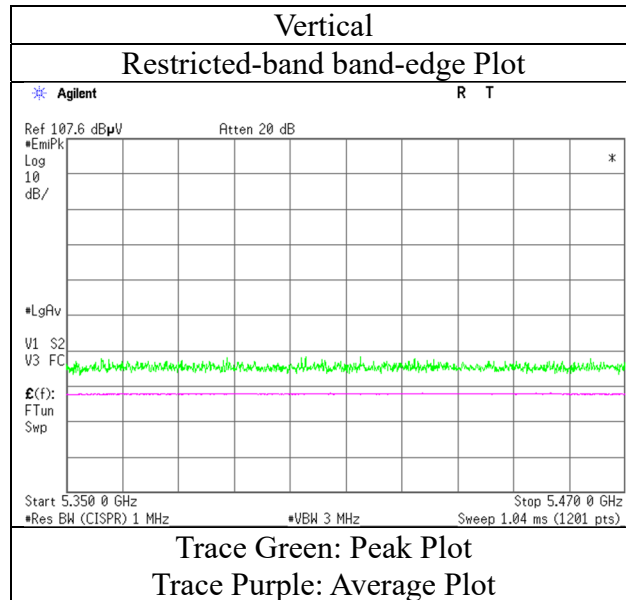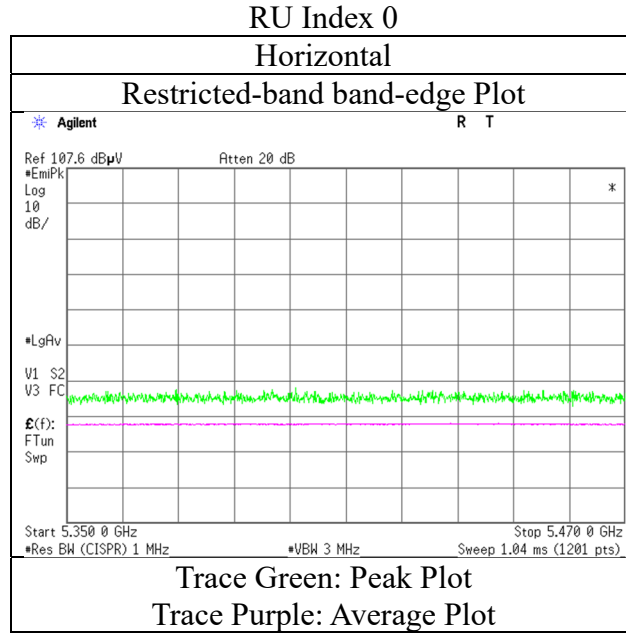

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (52-tone RU)

### RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	40.9	32.1	31.9	6.2	31.7	0.3	47.4	38.7	68.2	53.9	20.8	15.2	*1)
Hori.	5470.0	40.9	-	31.9	6.2	31.7	-	47.3	-	68.2	-	20.9	-	
Vert.	5460.0	40.3	32.0	31.9	6.2	31.7	0.3	46.7	38.7	68.2	53.9	21.5	15.2	*1)
Vert.	5470.0	41.5	-	31.9	6.2	31.7	-	47.9	-	68.2	-	20.3	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                                  10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (52-tone RU)

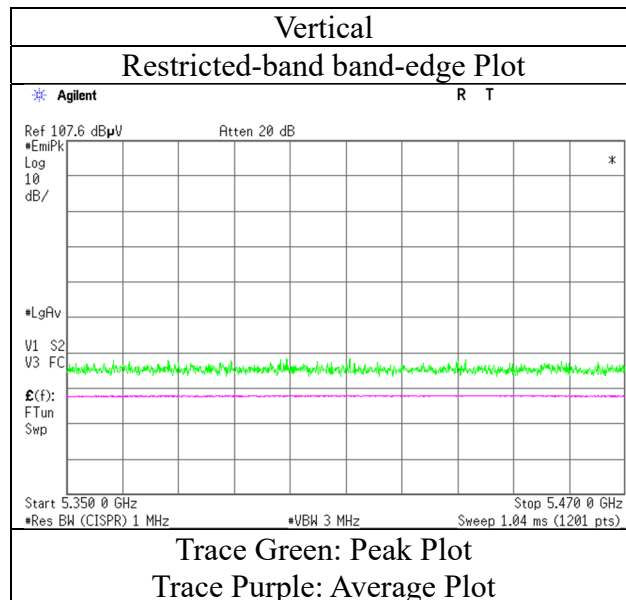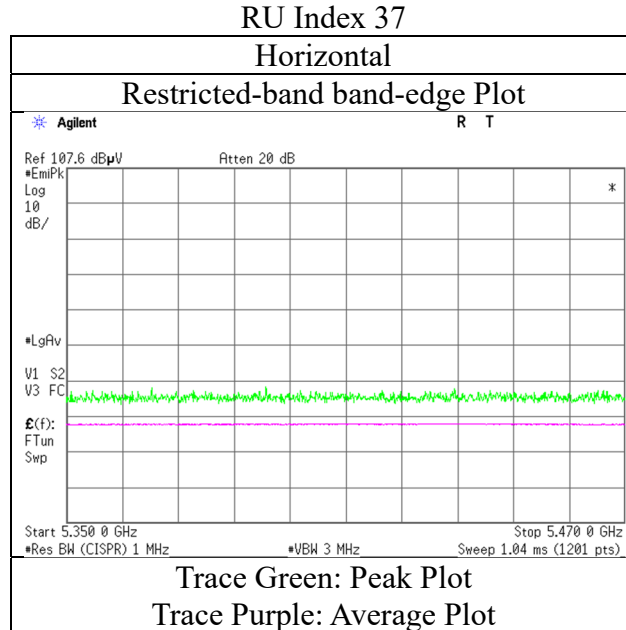

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (106-tone RU)

### RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	40.5	32.2	31.9	6.2	31.7	0.3	46.9	38.9	68.2	53.9	21.3	15.0	*1)
Hori.	5470.0	41.2	-	31.9	6.2	31.7	-	47.7	-	68.2	-	20.6	-	
Vert.	5460.0	40.6	32.3	31.9	6.2	31.7	0.3	47.0	39.0	68.2	53.9	21.2	14.9	*1)
Vert.	5470.0	41.2	-	31.9	6.2	31.7	-	47.6	-	68.2	-	20.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (106-tone RU)

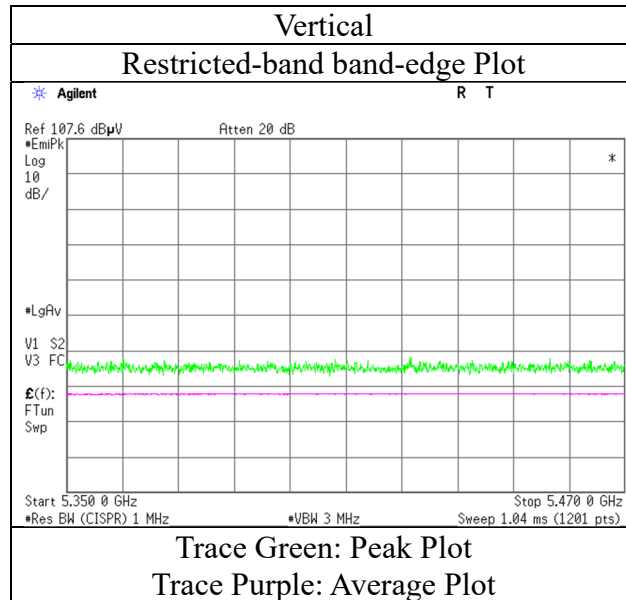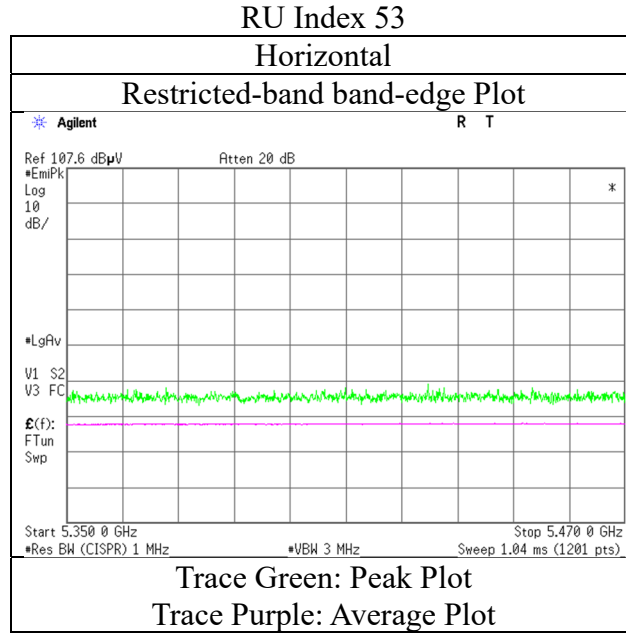

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (242-tone RU)

### RU Index 61

Polarity	Frequency	Reading	Reading	Ant.	Loss	Gain	Duty	Result	Result	Limit	Limit	Margin	Margin	Remark
[Hori/Vert]	[MHz]	(QP / PK)	(AV)	Factor	[dB]	[dB]	Factor	(QP / PK)	(AV)	(QP / PK)	(AV)	(QP / PK)	(AV)	
		[dBuV]	[dBuV]	[dB/m]			[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5460.0	41.4	33.8	31.9	6.2	31.7	0.3	47.8	40.5	68.2	53.9	20.4	13.4	*1)
Hori.	5470.0	42.4	-	31.9	6.2	31.7	-	48.9	-	68.2	-	19.3	-	
Vert.	5460.0	41.0	32.8	31.9	6.2	31.7	0.3	47.4	39.5	68.2	53.9	20.8	14.4	*1)
Vert.	5470.0	42.0	-	31.9	6.2	31.7	-	48.5	-	68.2	-	19.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$





## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5510 MHz (484-tone RU)

### RU Index 65

Polarity [Hori/Vert]	Frequency [MHz]	Reading (QP / PK) [dBuV]	Reading (AV) [dBuV]	Ant. Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (QP / PK) [dBuV/m]	Result (AV) [dBuV/m]	Limit (QP / PK) [dBuV/m]	Limit (AV) [dBuV/m]	Margin (QP / PK) [dB]	Margin (AV) [dB]	Remark
Hori.	5460.0	44.1	35.6	31.9	6.2	31.7	0.3	50.6	42.3	68.2	53.9	17.6	11.6	*1)
Hori.	5470.0	46.5	-	31.9	6.2	31.7	-	52.9	-	68.2	-	15.3	-	-
Vert.	5460.0	41.6	33.3	31.9	6.2	31.7	0.3	48.0	40.0	68.2	53.9	20.2	13.9	*1)
Vert.	5470.0	43.2	-	31.9	6.2	31.7	-	49.6	-	68.2	-	18.6	-	-

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                                  10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity    20 deg. C / 37 % RH  
Engineer                      Nachi Konegawa  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5510 MHz (484-tone RU)

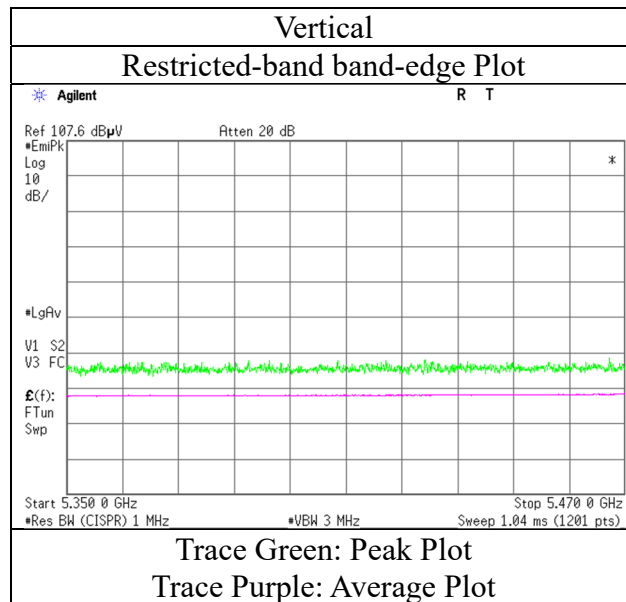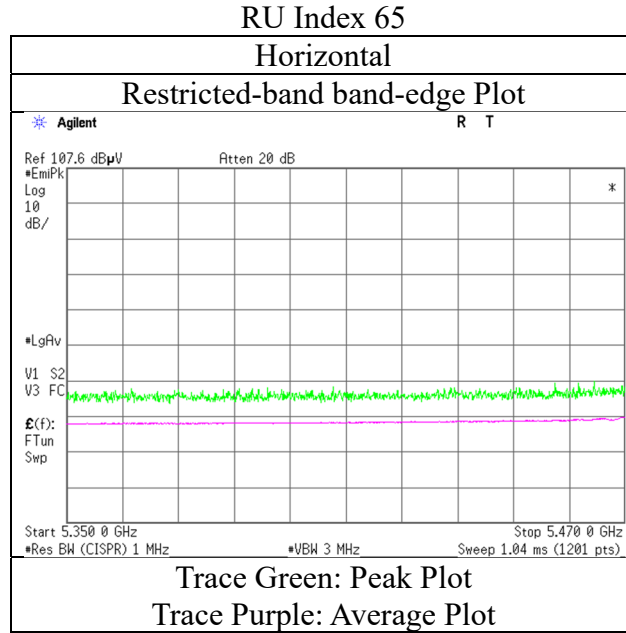

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (26-tone RU)

### RU Index 17

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	39.6	-	32.1	6.3	31.7	-	46.4	-	68.2	-	21.8	-	
Vert.	5725.0	40.7	-	32.1	6.3	31.7	-	47.5	-	68.2	-	20.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (26-tone RU)

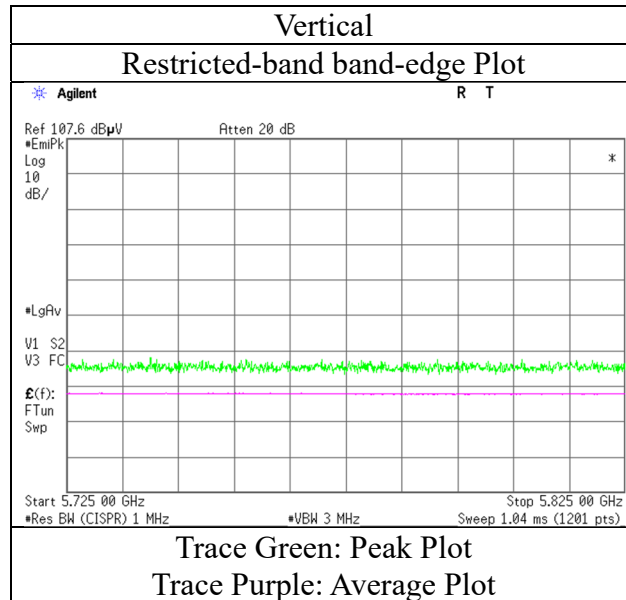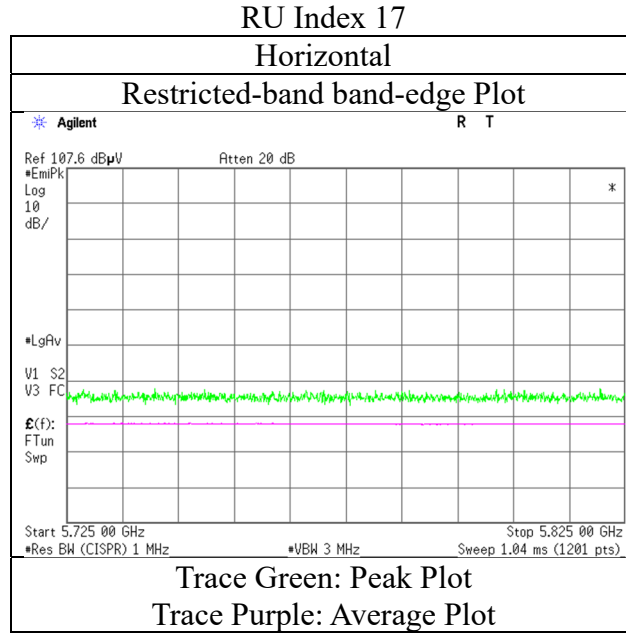

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (52-tone RU)

### RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	40.8	-	32.1	6.3	31.7	-	47.6	-	68.2	-	20.6	-	
Vert.	5725.0	40.9	-	32.1	6.3	31.7	-	47.7	-	68.2	-	20.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	20log(3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log(1.0 m / 3.0 m) = -9.5 dB

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (52-tone RU)

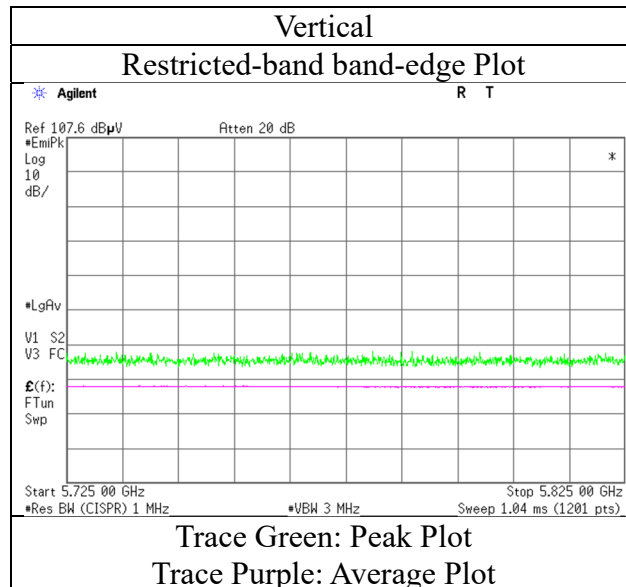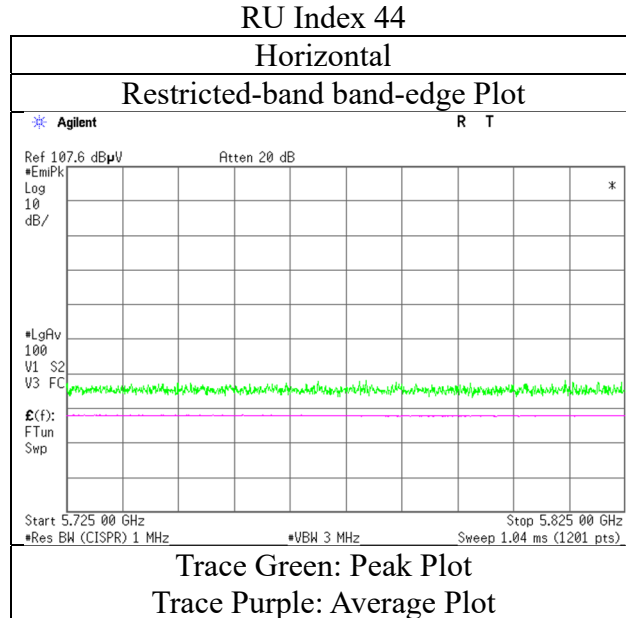

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (106-tone RU)

### RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	40.8	-	32.1	6.3	31.7	-	47.6	-	68.2	-	20.6	-	
Vert.	5725.0	40.5	-	32.1	6.3	31.7	-	47.2	-	68.2	-	21.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.



Distance factor:	1 GHz - 10 GHz	20log(3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log(1.0 m / 3.0 m) = -9.5 dB



### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                      Hiroki Numata  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5670 MHz (106-tone RU)

#### RU Index 56

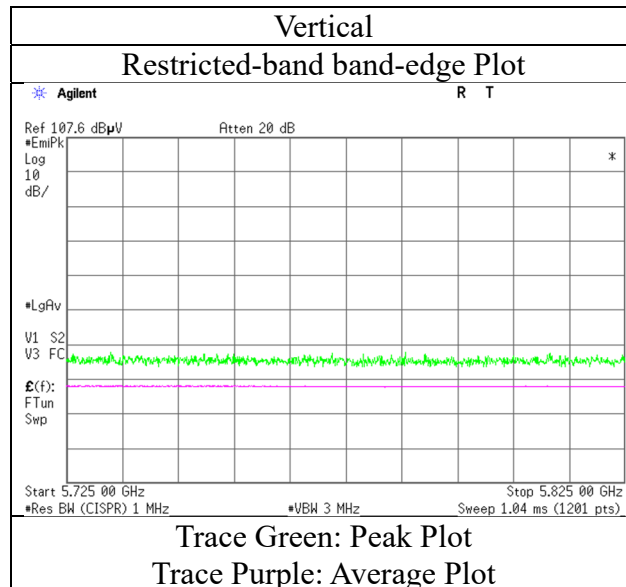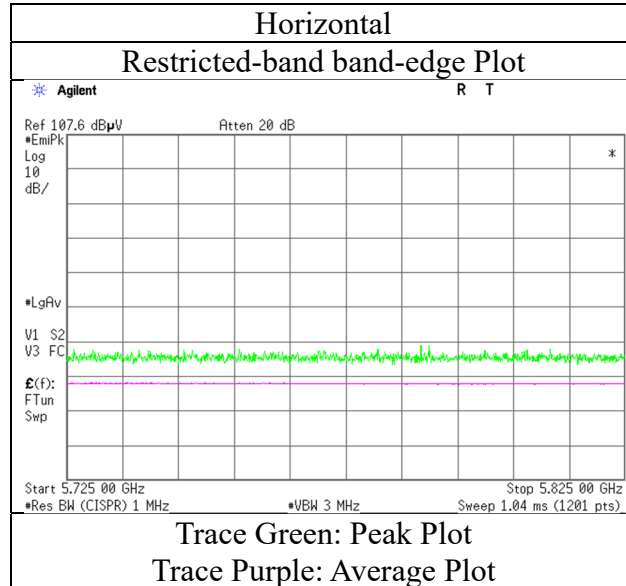

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (242-tone RU)

### RU Index 62

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	41.8	-	32.1	6.3	31.7	-	48.5	-	68.2	-	19.7	-	
Vert.	5725.0	41.6	-	32.1	6.3	31.7	-	48.3	-	68.2	-	19.9	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                         January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                    Hiroki Numata  
                                    (1 GHz - 10 GHz)  
Mode                         Tx 11ax-40 5670 MHz (242-tone RU)

#### RU Index 62

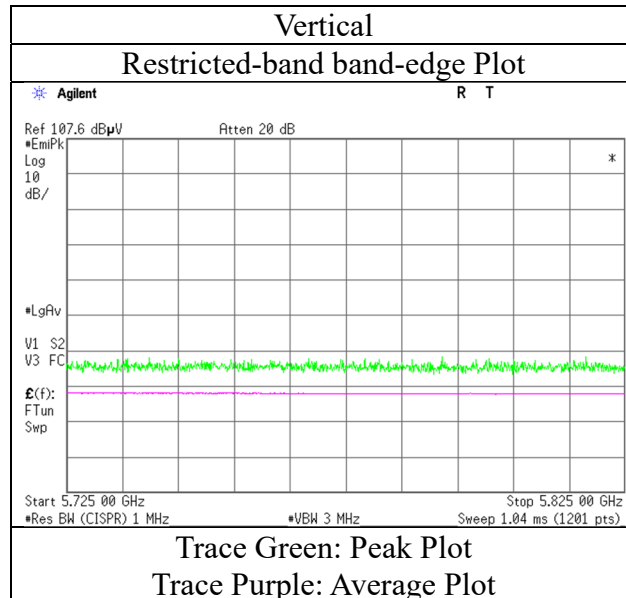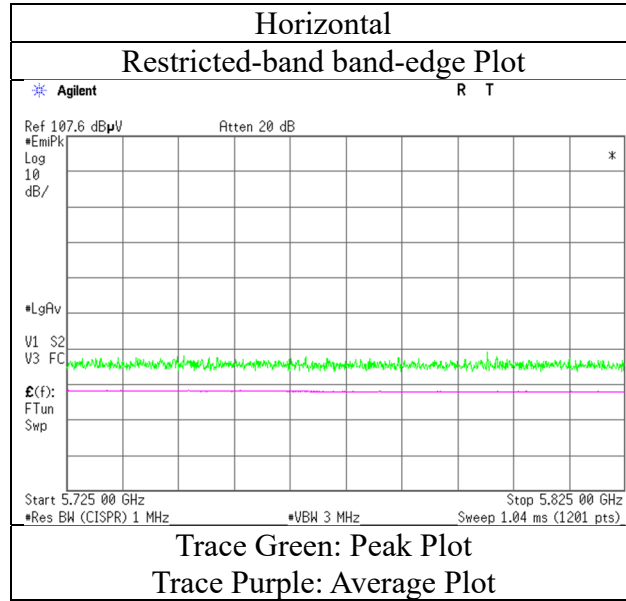

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 37 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5670 MHz (484-tone RU)

### RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5725.0	43.7	-	32.1	6.3	31.7	-	50.5	-	68.2	-	17.8	-	
Vert.	5725.0	42.7	-	32.1	6.3	31.7	-	49.5	-	68.2	-	18.7	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:	1 GHz - 10 GHz	20log(3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log(1.0 m / 3.0 m) = -9.5 dB

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity     20 deg. C / 37 % RH  
Engineer                      Nachi Konegawa  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5670 MHz (484-tone RU)

#### RU Index 65

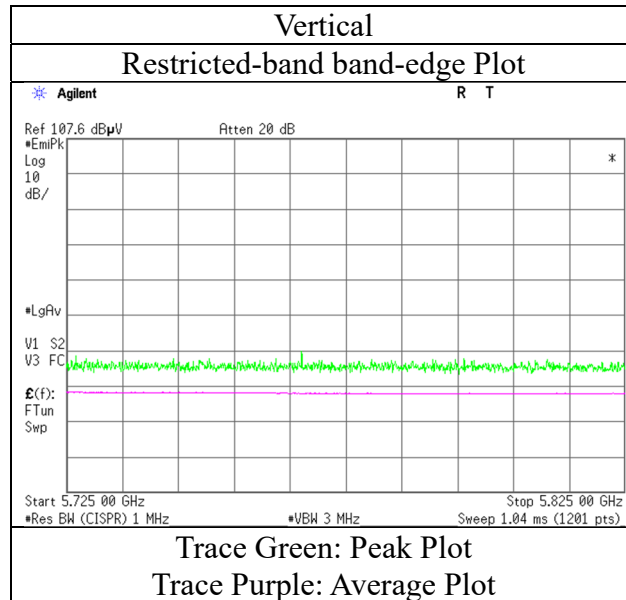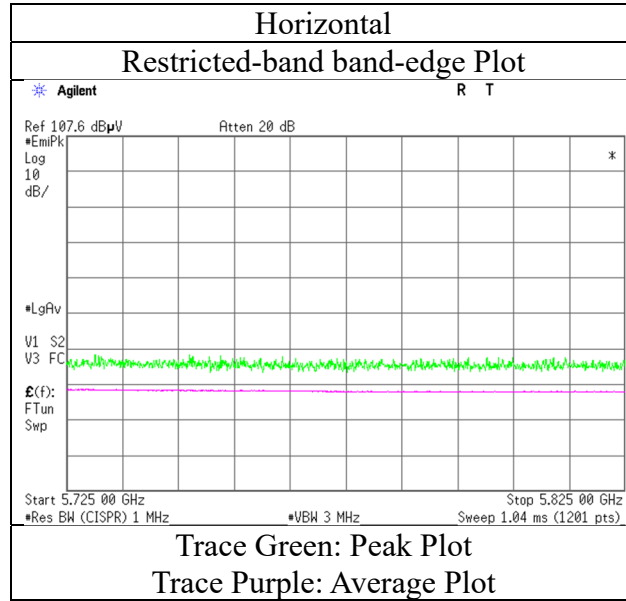

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (26-tone RU)

### RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.7	-	31.9	6.3	31.7	-	47.2	-	68.2	-	21.0	-	
Hori.	5700.0	40.1	-	32.1	6.3	31.7	-	46.7	-	105.2	-	58.5	-	
Hori.	5720.0	41.1	-	32.1	6.3	31.7	-	47.9	-	110.8	-	62.9	-	
Hori.	5725.0	44.9	-	32.1	6.3	31.7	-	51.7	-	122.2	-	70.6	-	
Vert.	5650.0	41.2	-	31.9	6.3	31.7	-	47.7	-	68.2	-	20.5	-	
Vert.	5700.0	40.3	-	32.1	6.3	31.7	-	47.0	-	105.2	-	58.2	-	
Vert.	5720.0	40.8	-	32.1	6.3	31.7	-	47.5	-	110.8	-	63.3	-	
Vert.	5725.0	42.9	-	32.1	6.3	31.7	-	49.7	-	122.2	-	72.5	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                                  10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                      Hiroki Numata  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5755 MHz (26-tone RU)

#### RU Index 0

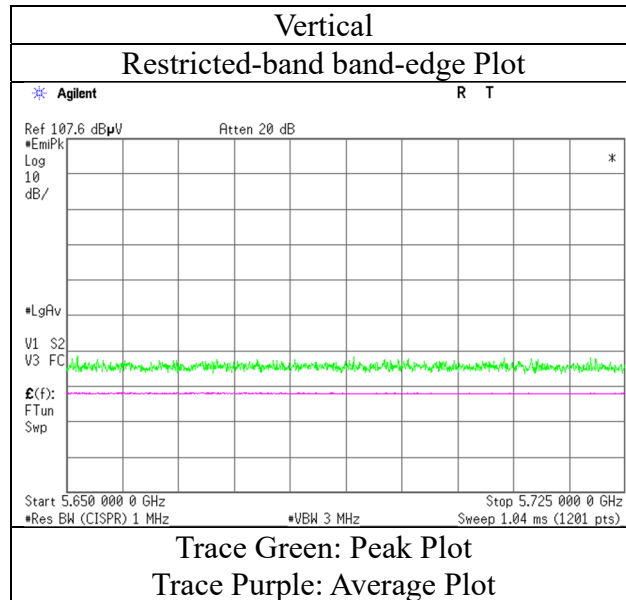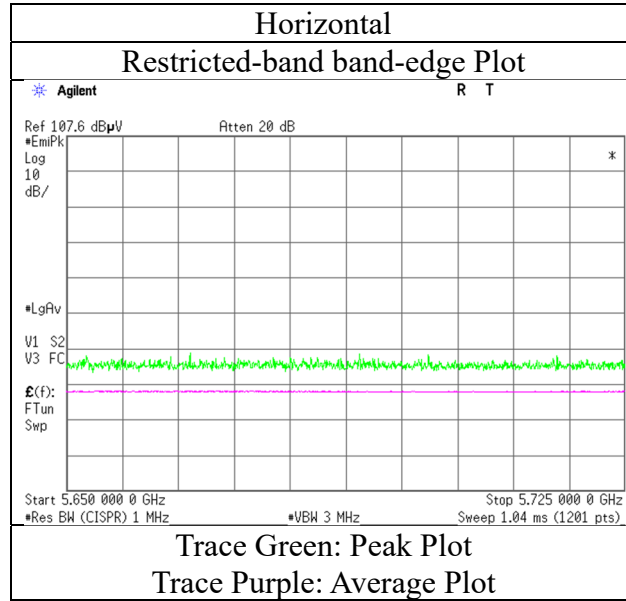

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (52-tone RU)

### RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.5	-	31.9	6.3	31.7	-	47.0	-	68.2	-	21.2	-	
Hori.	5700.0	41.0	-	32.1	6.3	31.7	-	47.7	-	105.2	-	57.5	-	
Hori.	5720.0	41.1	-	32.1	6.3	31.7	-	47.8	-	110.8	-	63.0	-	
Hori.	5725.0	45.2	-	32.1	6.3	31.7	-	52.0	-	122.2	-	70.3	-	
Vert.	5650.0	40.4	-	31.9	6.3	31.7	-	46.9	-	68.2	-	21.3	-	
Vert.	5700.0	40.3	-	32.1	6.3	31.7	-	47.0	-	105.2	-	58.2	-	
Vert.	5720.0	41.1	-	32.1	6.3	31.7	-	47.8	-	110.8	-	63.0	-	
Vert.	5725.0	42.4	-	32.1	6.3	31.7	-	49.2	-	122.2	-	73.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$



### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (52-tone RU)

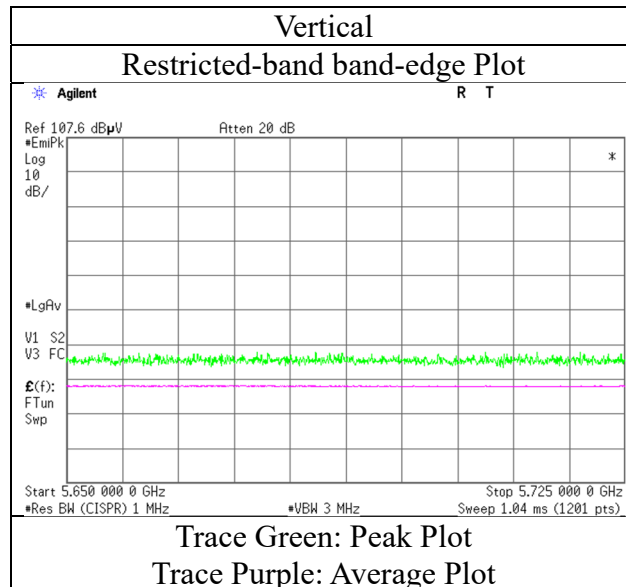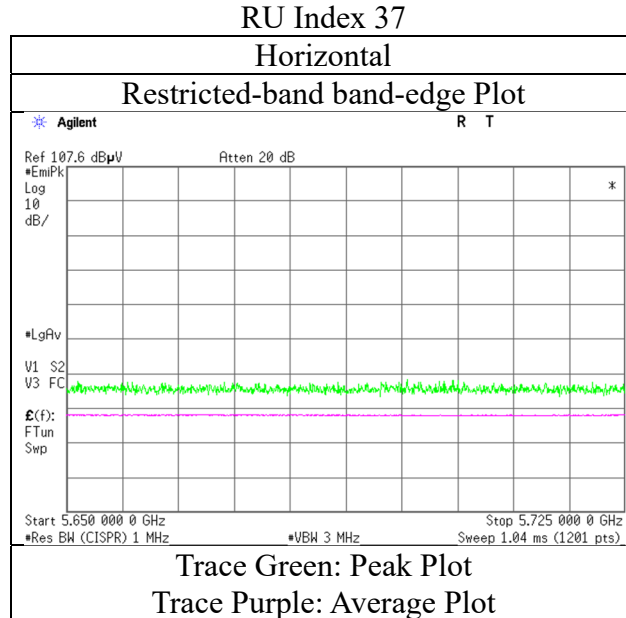

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (106-tone RU)

### RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.9	-	31.9	6.3	31.7	-	47.5	-	68.2	-	20.7	-	
Hori.	5700.0	41.3	-	32.1	6.3	31.7	-	48.0	-	105.2	-	57.3	-	
Hori.	5720.0	43.0	-	32.1	6.3	31.7	-	49.8	-	110.8	-	61.0	-	
Hori.	5725.0	48.0	-	32.1	6.3	31.7	-	54.8	-	122.2	-	67.4	-	
Vert.	5650.0	40.4	-	31.9	6.3	31.7	-	47.0	-	68.2	-	21.3	-	
Vert.	5700.0	40.6	-	32.1	6.3	31.7	-	47.3	-	105.2	-	58.0	-	
Vert.	5720.0	40.9	-	32.1	6.3	31.7	-	47.7	-	110.8	-	63.1	-	
Vert.	5725.0	43.2	-	32.1	6.3	31.7	-	50.0	-	122.2	-	72.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                      Hiroki Numata  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5755 MHz (106-tone RU)

#### RU Index 53

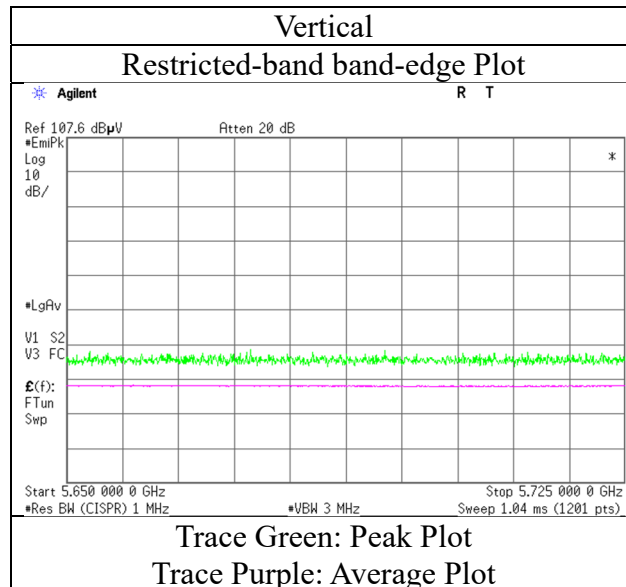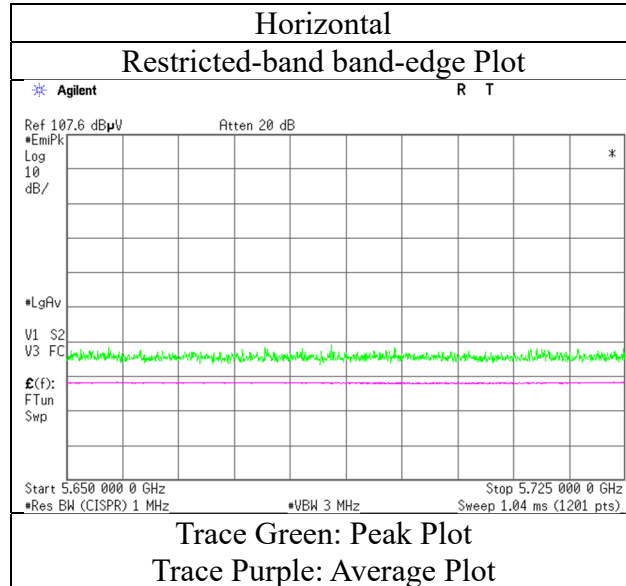

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (242-tone RU)

### RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	40.6	-	31.9	6.3	31.7	-	47.2	-	68.2	-	21.0	-	
Hori.	5700.0	43.1	-	32.1	6.3	31.7	-	49.8	-	105.2	-	55.4	-	
Hori.	5720.0	59.3	-	32.1	6.3	31.7	-	66.1	-	110.8	-	44.7	-	
Hori.	5725.0	62.1	-	32.1	6.3	31.7	-	68.9	-	122.2	-	53.3	-	
Vert.	5650.0	40.3	-	31.9	6.3	31.7	-	46.8	-	68.2	-	21.4	-	
Vert.	5700.0	40.8	-	32.1	6.3	31.7	-	47.5	-	105.2	-	57.7	-	
Vert.	5720.0	54.6	-	32.1	6.3	31.7	-	61.4	-	110.8	-	49.4	-	
Vert.	5725.0	59.5	-	32.1	6.3	31.7	-	66.2	-	122.2	-	56.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (242-tone RU)

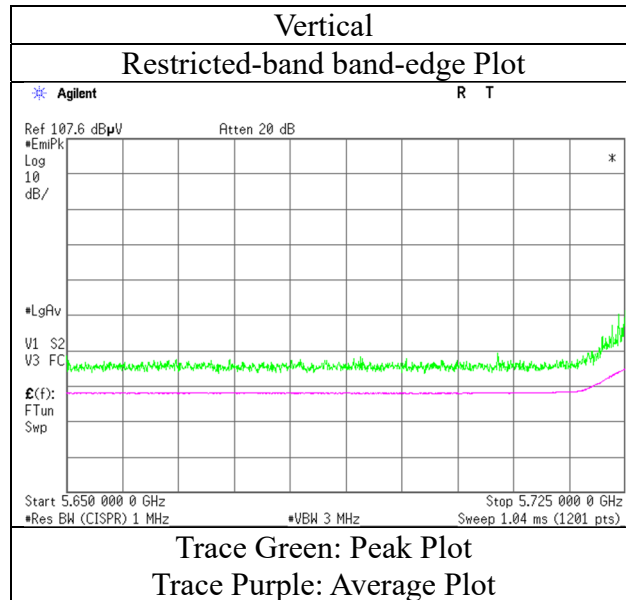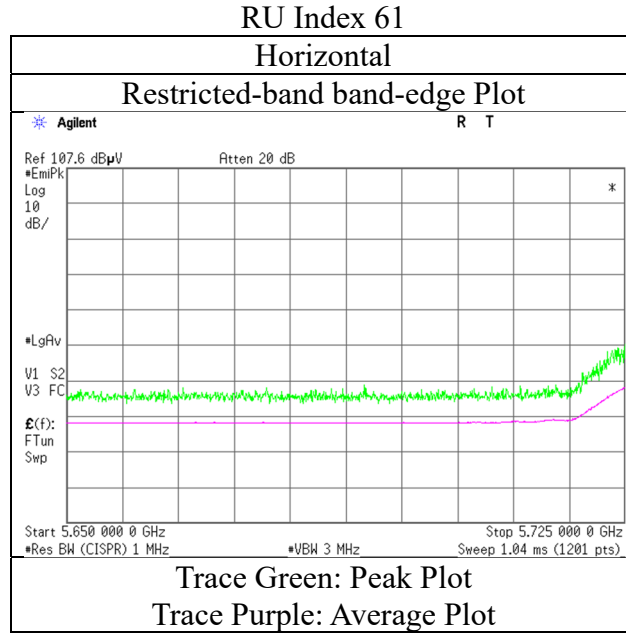

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (484-tone RU)

### RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5650.0	41.3	-	31.9	6.3	31.7	-	47.9	-	68.2	-	20.3	-	
Hori.	5700.0	55.1	-	32.1	6.3	31.7	-	61.8	-	105.2	-	43.4	-	
Hori.	5720.0	64.6	-	32.1	6.3	31.7	-	71.3	-	110.8	-	39.5	-	
Hori.	5725.0	66.3	-	32.1	6.3	31.7	-	73.1	-	122.2	-	49.1	-	
Vert.	5650.0	40.8	-	31.9	6.3	31.7	-	47.4	-	68.2	-	20.8	-	
Vert.	5700.0	50.0	-	32.1	6.3	31.7	-	56.7	-	105.2	-	48.6	-	
Vert.	5720.0	59.2	-	32.1	6.3	31.7	-	66.0	-	110.8	-	44.9	-	
Vert.	5725.0	59.8	-	32.1	6.3	31.7	-	66.6	-	122.2	-	55.6	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5755 MHz (484-tone RU)

#### RU Index 65

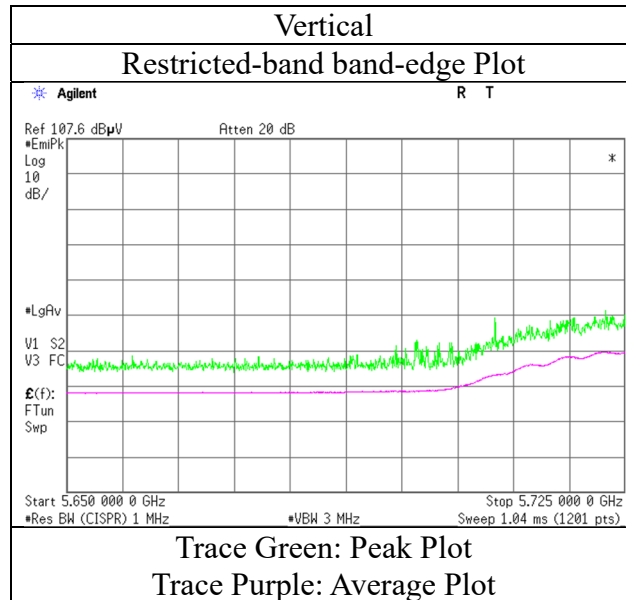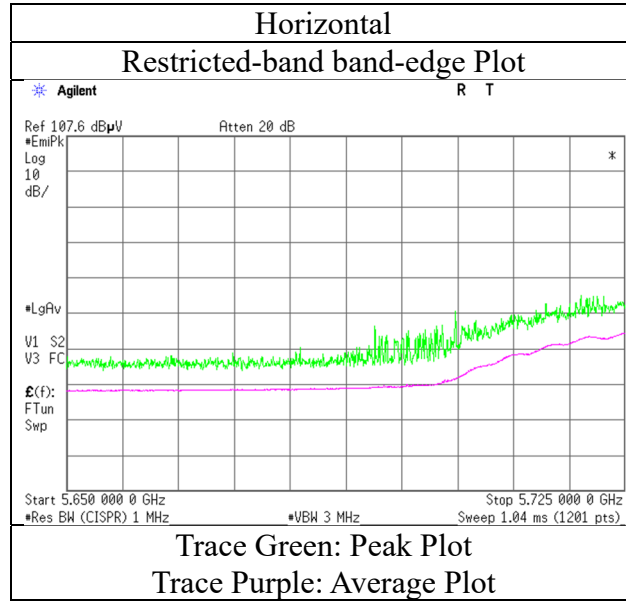

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (26-tone RU)

### RU Index 17

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.9	-	32.5	6.4	31.7	-	48.0	-	122.2	-	74.2	-	
Hori.	5855.0	40.2	-	32.5	6.4	31.7	-	47.3	-	110.8	-	63.5	-	
Hori.	5875.0	40.1	-	32.5	6.4	31.7	-	47.3	-	105.2	-	57.9	-	
Hori.	5925.0	40.6	-	32.5	6.4	31.7	-	47.8	-	68.2	-	20.4	-	
Vert.	5850.0	41.2	-	32.5	6.4	31.7	-	48.3	-	122.2	-	73.9	-	
Vert.	5855.0	40.0	-	32.5	6.4	31.7	-	47.1	-	110.8	-	63.7	-	
Vert.	5875.0	40.5	-	32.5	6.4	31.7	-	47.6	-	105.2	-	57.6	-	
Vert.	5925.0	40.3	-	32.5	6.4	31.7	-	47.5	-	68.2	-	20.8	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$



### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (26-tone RU)

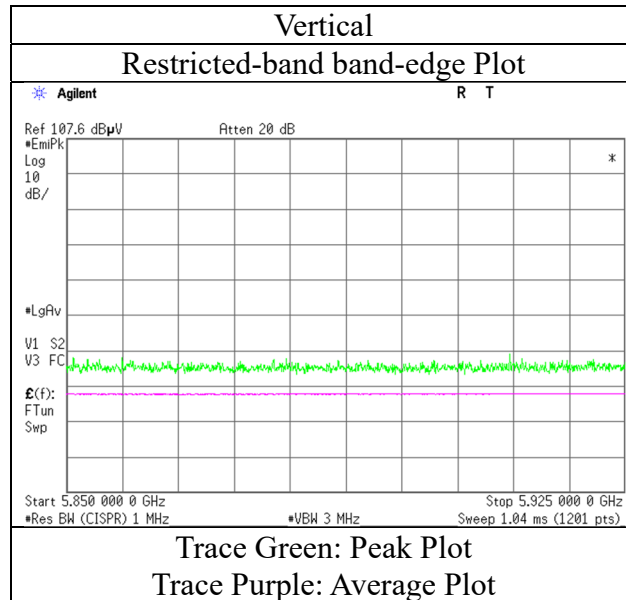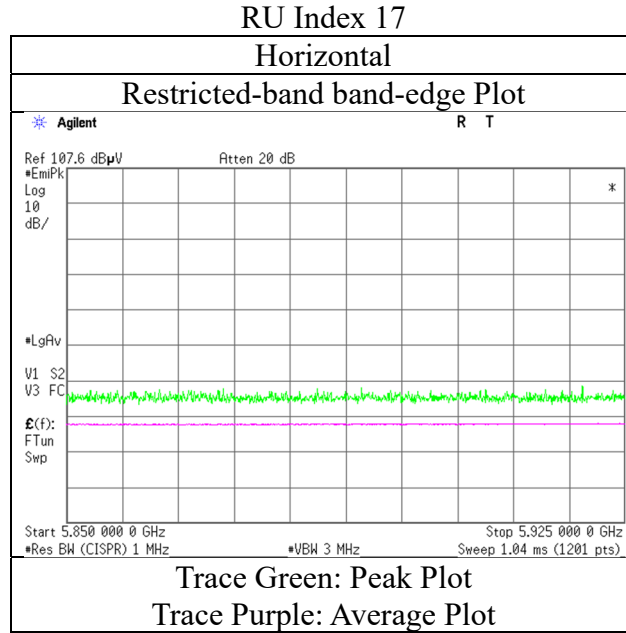

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (52-tone RU)

### RU Index 44

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.7	-	32.5	6.4	31.7	-	47.8	-	122.2	-	74.4	-	
Hori.	5855.0	40.2	-	32.5	6.4	31.7	-	47.3	-	110.8	-	63.5	-	
Hori.	5875.0	40.0	-	32.5	6.4	31.7	-	47.2	-	105.2	-	58.1	-	
Hori.	5925.0	40.1	-	32.5	6.4	31.7	-	47.3	-	68.2	-	20.9	-	
Vert.	5850.0	40.7	-	32.5	6.4	31.7	-	47.8	-	122.2	-	74.4	-	
Vert.	5855.0	40.3	-	32.5	6.4	31.7	-	47.4	-	110.8	-	63.4	-	
Vert.	5875.0	40.2	-	32.5	6.4	31.7	-	47.4	-	105.2	-	57.8	-	
Vert.	5925.0	41.0	-	32.5	6.4	31.7	-	48.2	-	68.2	-	20.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                      Hiroki Numata  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5795 MHz (52-tone RU)

#### RU Index 44

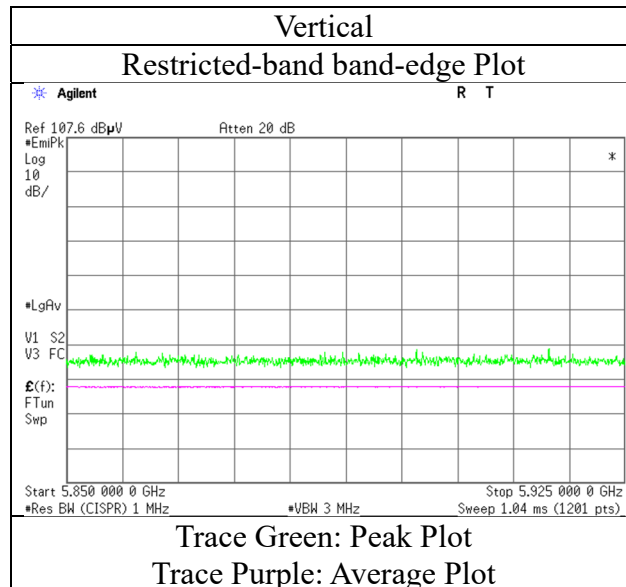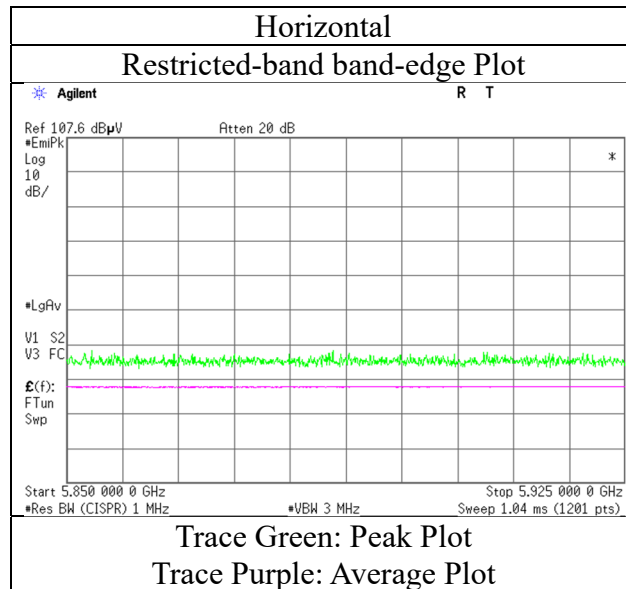

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (106-tone RU)

### RU Index 56

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	40.9	-	32.5	6.4	31.7	-	48.0	-	122.2	-	74.2	-	
Hori.	5855.0	40.3	-	32.5	6.4	31.7	-	47.5	-	110.8	-	63.4	-	
Hori.	5875.0	40.3	-	32.5	6.4	31.7	-	47.5	-	105.2	-	57.7	-	
Hori.	5925.0	40.8	-	32.5	6.4	31.7	-	48.0	-	68.2	-	20.3	-	
Vert.	5850.0	40.3	-	32.5	6.4	31.7	-	47.4	-	122.2	-	74.8	-	
Vert.	5855.0	40.7	-	32.5	6.4	31.7	-	47.8	-	110.8	-	63.0	-	
Vert.	5875.0	40.5	-	32.5	6.4	31.7	-	47.7	-	105.2	-	57.5	-	
Vert.	5925.0	41.9	-	32.5	6.4	31.7	-	49.1	-	68.2	-	19.2	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                                  10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                            January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                      Hiroki Numata  
                                      (1 GHz - 10 GHz)  
Mode                            Tx 11ax-40 5795 MHz (106-tone RU)

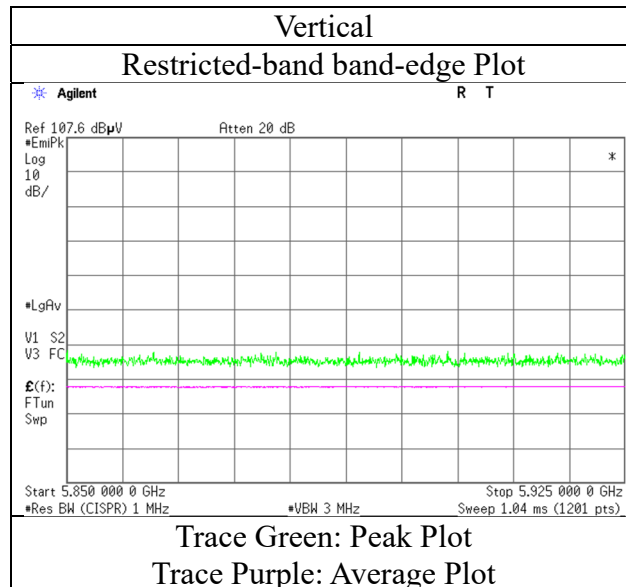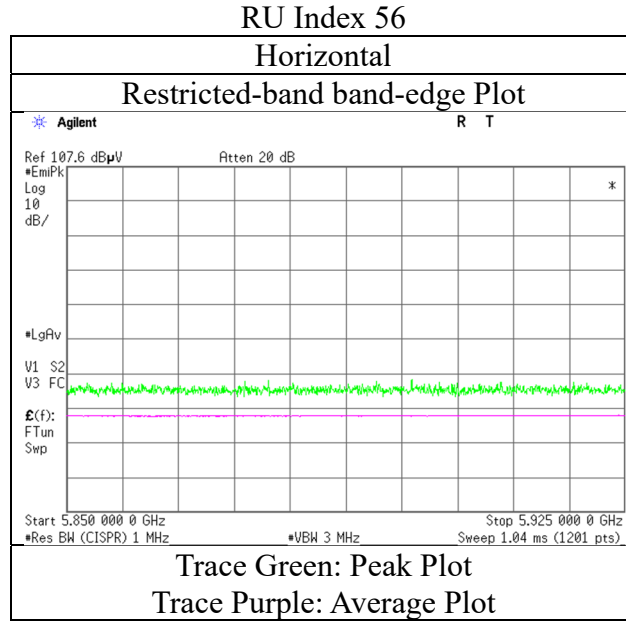

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (242-tone RU)

### RU Index 62

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	41.1	-	32.5	6.4	31.7	-	48.2	-	122.2	-	74.0	-	
Hori.	5855.0	41.4	-	32.5	6.4	31.7	-	48.5	-	110.8	-	62.3	-	
Hori.	5875.0	41.4	-	32.5	6.4	31.7	-	48.5	-	105.2	-	56.7	-	
Hori.	5925.0	40.3	-	32.5	6.4	31.7	-	47.5	-	68.2	-	20.7	-	
Vert.	5850.0	40.8	-	32.5	6.4	31.7	-	47.9	-	122.2	-	74.3	-	
Vert.	5855.0	40.4	-	32.5	6.4	31.7	-	47.5	-	110.8	-	63.3	-	
Vert.	5875.0	40.9	-	32.5	6.4	31.7	-	48.0	-	105.2	-	57.2	-	
Vert.	5925.0	40.0	-	32.5	6.4	31.7	-	47.1	-	68.2	-	21.1	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz      20log(3.9 m / 3.0 m) = 2.28 dB  
                              10 GHz - 40 GHz      20log(1.0 m / 3.0 m) = -9.5 dB



## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-40 5795 MHz (484-tone RU)

### RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5850.0	49.0	-	32.5	6.4	31.7	-	56.1	-	122.2	-	66.1	-	
Hori.	5855.0	46.7	-	32.5	6.4	31.7	-	53.8	-	110.8	-	57.0	-	
Hori.	5875.0	43.2	-	32.5	6.4	31.7	-	50.3	-	105.2	-	54.9	-	
Hori.	5925.0	40.2	-	32.5	6.4	31.7	-	47.4	-	68.2	-	20.8	-	
Vert.	5850.0	46.8	-	32.5	6.4	31.7	-	54.0	-	122.2	-	68.3	-	
Vert.	5855.0	45.7	-	32.5	6.4	31.7	-	52.8	-	110.8	-	58.0	-	
Vert.	5875.0	42.1	-	32.5	6.4	31.7	-	49.3	-	105.2	-	56.0	-	
Vert.	5925.0	41.1	-	32.5	6.4	31.7	-	48.3	-	68.2	-	20.0	-	

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor:      1 GHz - 10 GHz       $20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$   
                              10 GHz - 40 GHz       $20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$





## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (26-tone RU)

### RU Index 0

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	41.2	32.4	31.9	6.1	31.6	0.3	47.6	39.1	73.9	53.9	26.3	14.8	*1)
Vert.	5150.0	40.1	31.9	31.9	6.1	31.6	0.3	46.5	38.6	73.9	53.9	27.4	15.3	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	20log(3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log(1.0 m / 3.0 m) = -9.5 dB

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (26-tone RU)

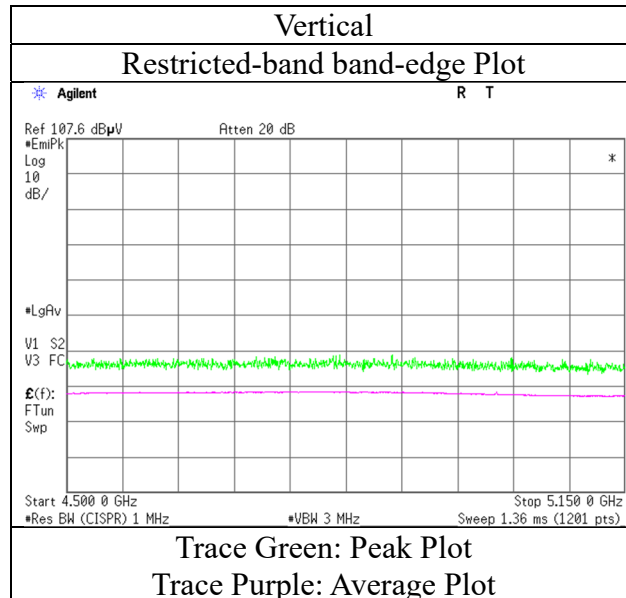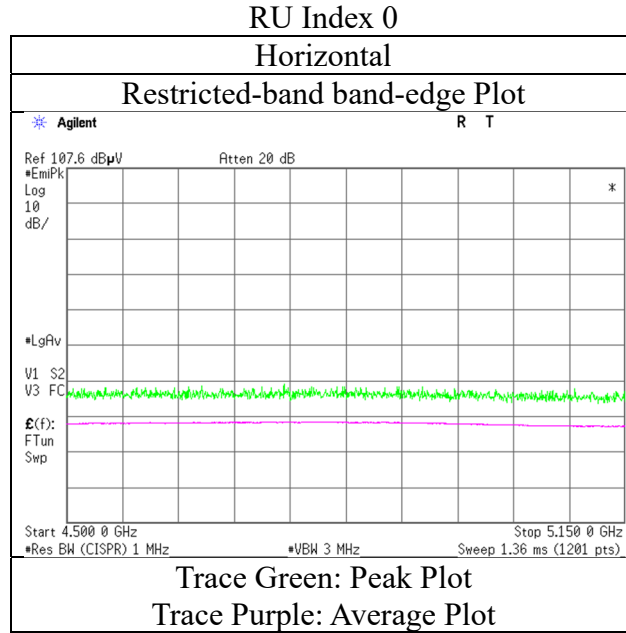

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (52-tone RU)

### RU Index 37

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	40.4	31.6	31.9	6.1	31.6	0.3	46.8	38.2	73.9	53.9	27.1	15.7	*1)
Vert.	5150.0	40.3	31.8	31.9	6.1	31.6	0.3	46.7	38.4	73.9	53.9	27.2	15.5	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (52-tone RU)

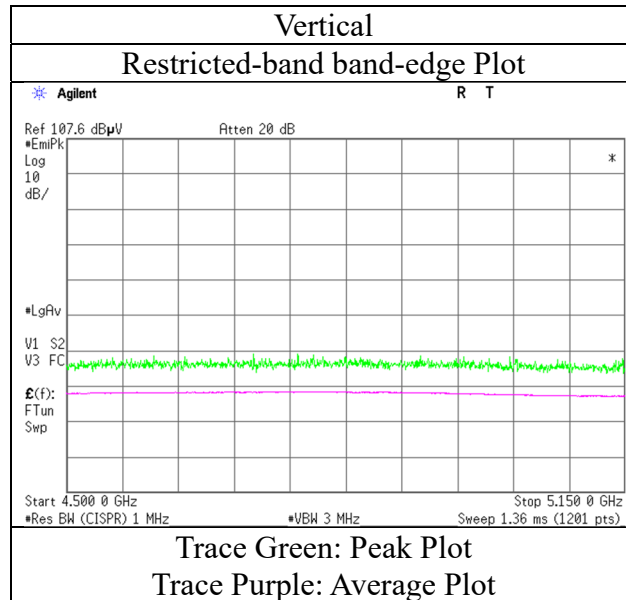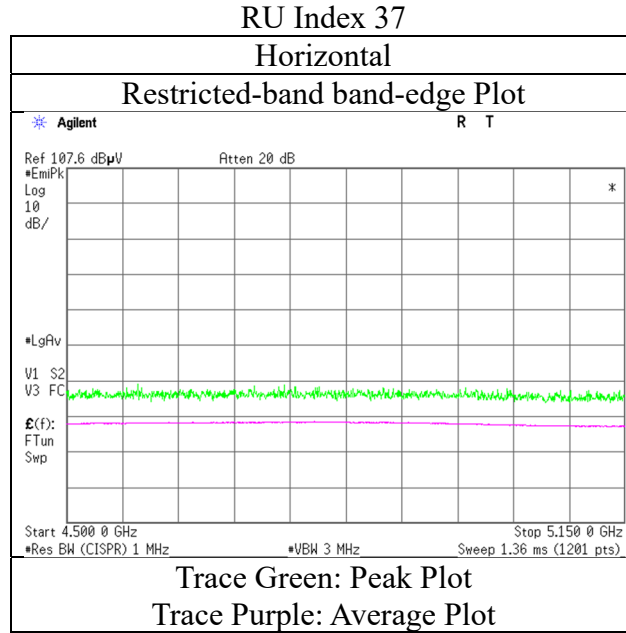

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (106-tone RU)

### RU Index 53

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	41.3	32.5	31.9	6.1	31.6	0.3	47.7	39.2	73.9	53.9	26.2	14.7	*1)
Vert.	5150.0	40.2	31.9	31.9	6.1	31.6	0.3	46.6	38.6	73.9	53.9	27.4	15.3	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (106-tone RU)

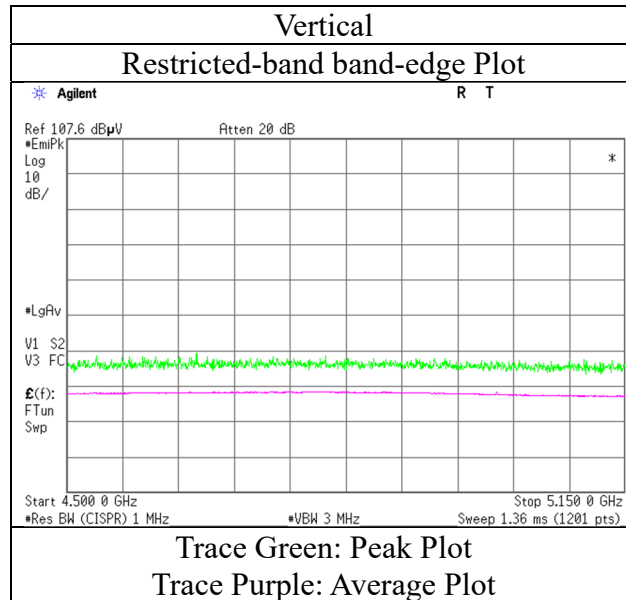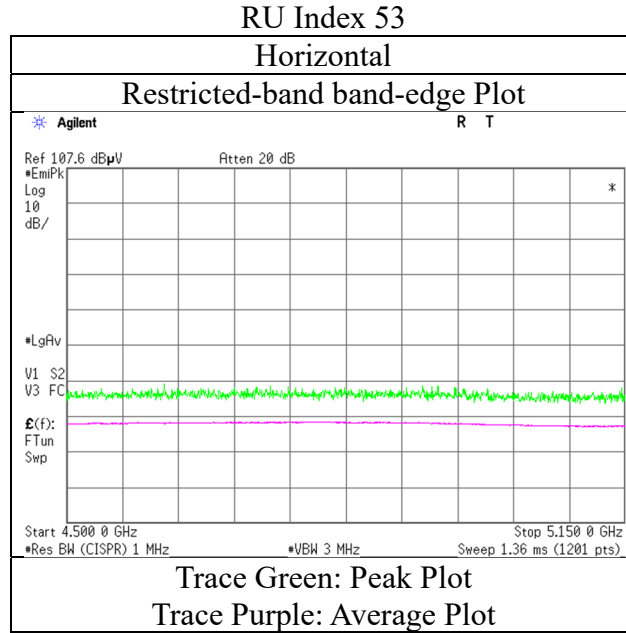

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (242-tone RU)

### RU Index 61

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	40.7	31.9	31.9	6.1	31.6	0.3	47.1	38.5	73.9	53.9	26.8	15.4	*1)
Vert.	5150.0	40.5	31.8	31.9	6.1	31.6	0.3	46.9	38.4	73.9	53.9	27.0	15.5	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.



\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$



### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (242-tone RU)

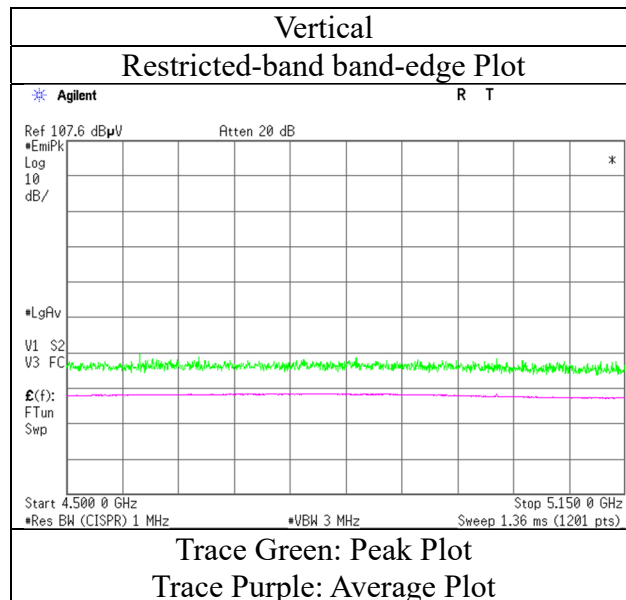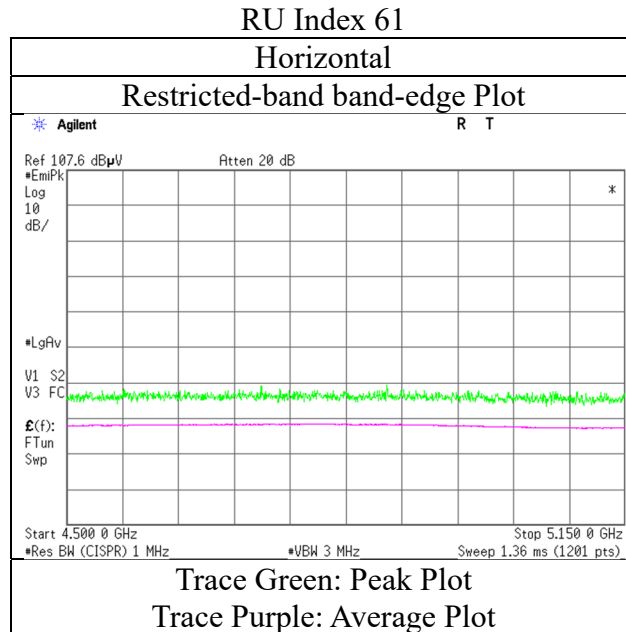

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (484-tone RU)

### RU Index 65

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	41.5	32.5	31.9	6.1	31.6	0.3	47.9	39.2	73.9	53.9	26.0	14.7	*1)
Vert.	5150.0	40.8	31.8	31.9	6.1	31.6	0.3	47.2	38.5	73.9	53.9	26.7	15.5	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV)= Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                         January 20, 2022  
Temperature / Humidity    20 deg. C / 36 % RH  
Engineer                    Hiroki Numata  
                                    (1 GHz - 10 GHz)  
Mode                         Tx 11ax-80 5210 MHz (484-tone RU)

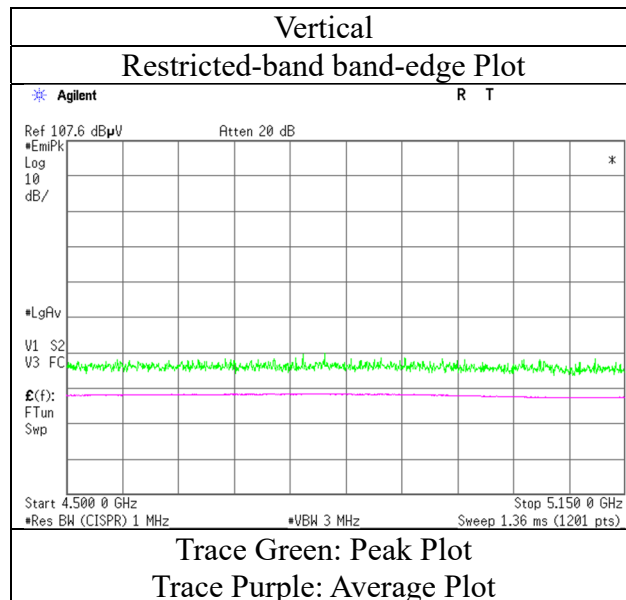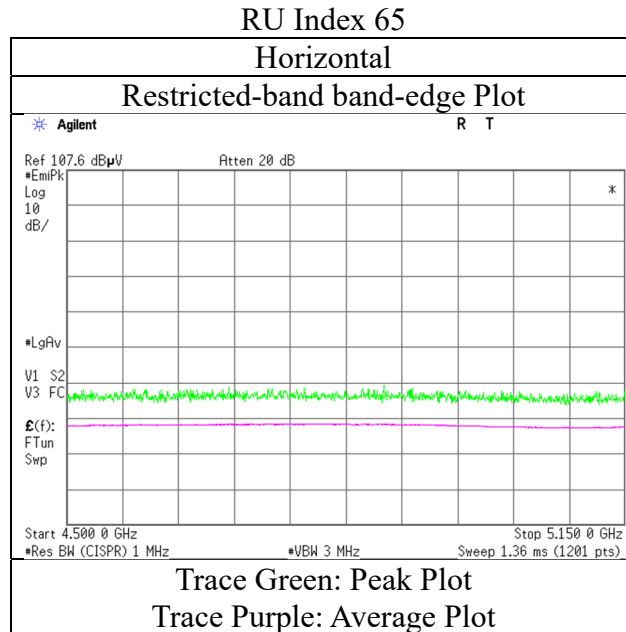

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata
	(1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (996-tone RU)

### RU Index 67

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5150.0	42.9	32.7	31.9	6.1	31.6	0.3	49.3	39.3	73.9	53.9	24.6	14.6	*1)
Vert.	5150.0	42.2	32.3	31.9	6.1	31.6	0.3	48.6	38.9	73.9	53.9	25.3	15.0	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 20, 2022
Temperature / Humidity	20 deg. C / 36 % RH
Engineer	Hiroki Numata (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5210 MHz (996-tone RU)

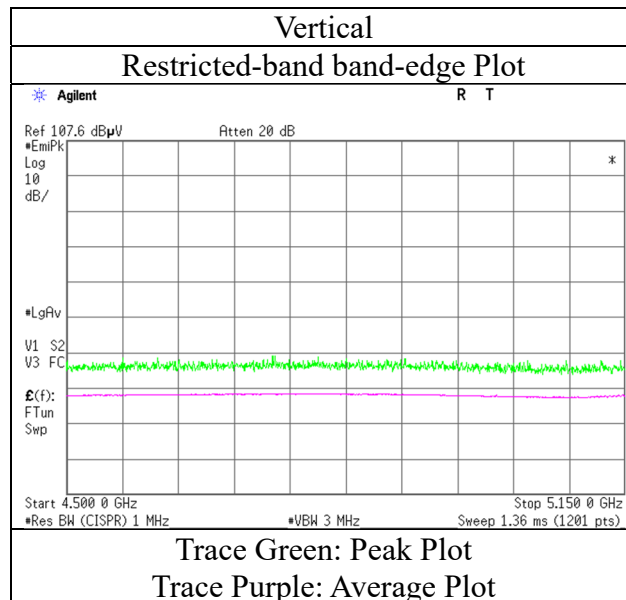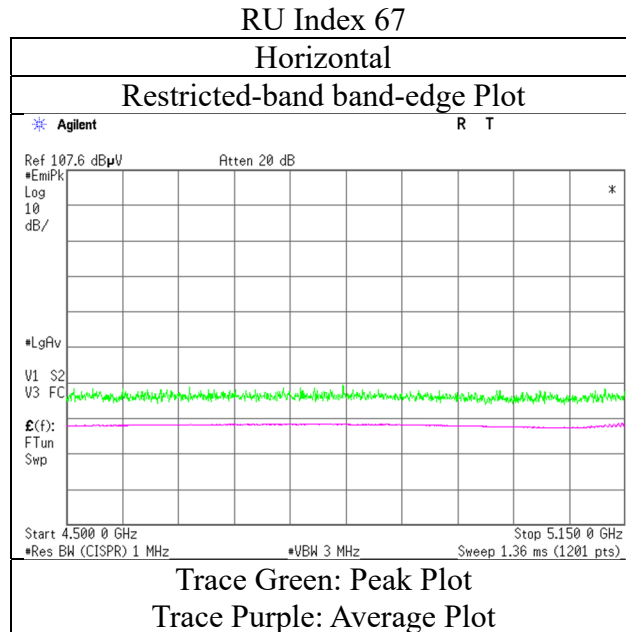

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (26-tone RU)

### RU Index 36

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	41.2	32.1	31.7	6.2	31.6	0.3	47.5	38.6	73.9	53.9	26.5	15.3	*1)
Vert.	5350.0	41.0	32.2	31.7	6.2	31.6	0.3	47.3	38.7	73.9	53.9	26.6	15.2	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                         January 21, 2022  
Temperature / Humidity    22 deg. C / 32 % RH  
Engineer                    Nachi Konegawa  
                                    (1 GHz - 10 GHz)  
Mode                         Tx 11ax-80 5290 MHz (26-tone RU)

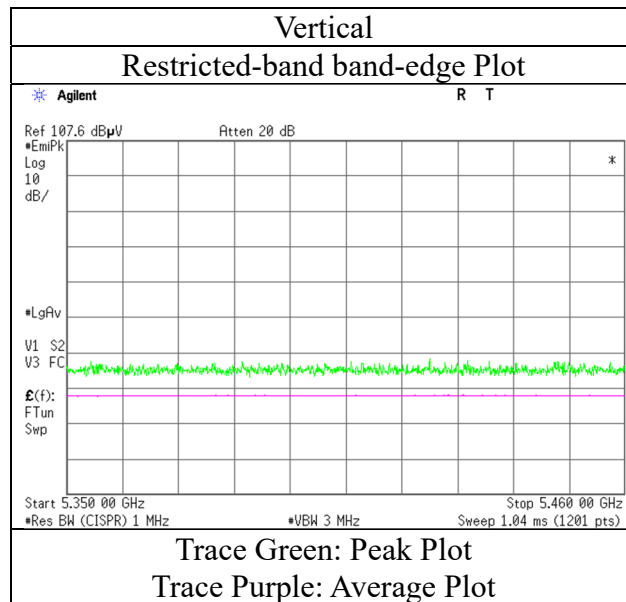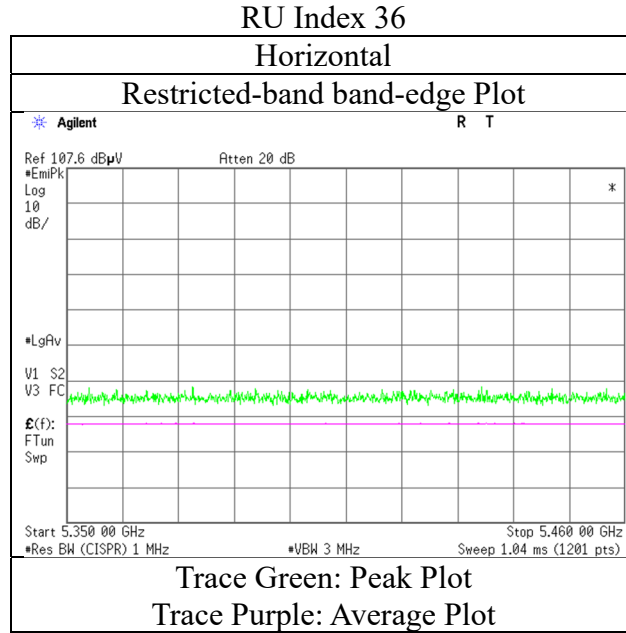

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (52-tone RU)

### RU Index 52

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	41.1	32.2	31.7	6.2	31.6	0.3	47.3	38.7	73.9	53.9	26.6	15.2	*1)
Vert.	5350.0	41.3	32.2	31.7	6.2	31.6	0.3	47.5	38.7	73.9	53.9	26.4	15.2	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)



Distance factor:	1 GHz - 10 GHz	20log(3.9 m / 3.0 m) = 2.28 dB
	10 GHz - 40 GHz	20log(1.0 m / 3.0 m) = -9.5 dB



### Radiated Spurious Emission

Test place                    Ise EMC Lab.  
Semi Anechoic Chamber    No.3  
Date                         January 21, 2022  
Temperature / Humidity    22 deg. C / 32 % RH  
Engineer                    Nachi Konegawa  
                                    (1 GHz - 10 GHz)  
Mode                         Tx 11ax-80 5290 MHz (52-tone RU)

#### RU Index 52

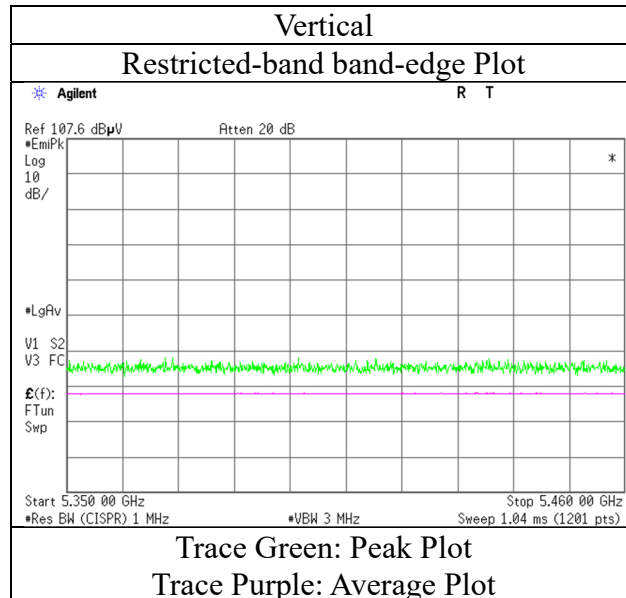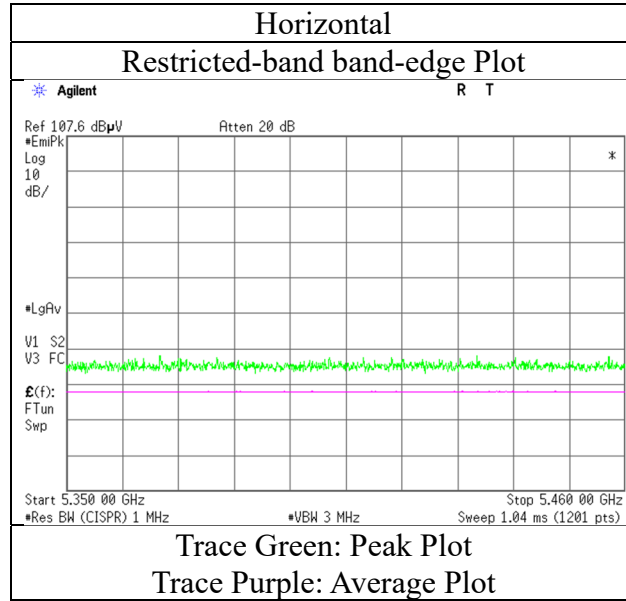

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (106-tone RU)

### RU Index 60

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	41.5	32.6	31.7	6.2	31.6	0.3	47.7	39.0	73.9	53.9	26.2	14.9	*1)
Vert.	5350.0	41.4	32.4	31.7	6.2	31.6	0.3	47.7	38.9	73.9	53.9	26.2	15.0	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (106-tone RU)

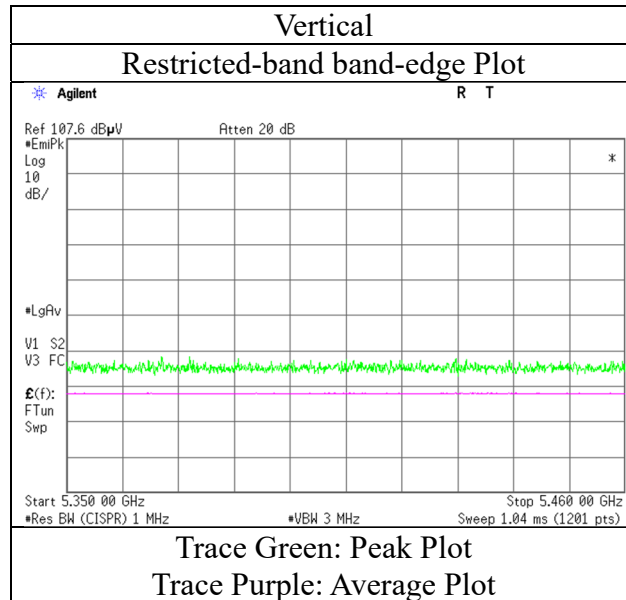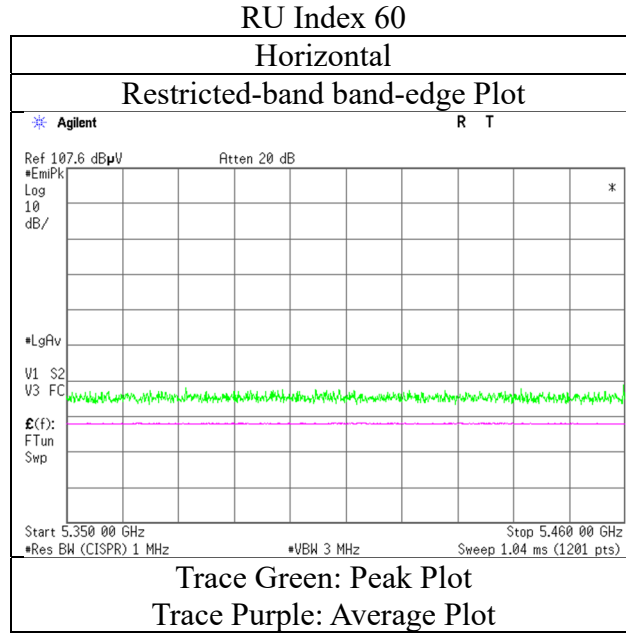

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (242-tone RU)

### RU Index 64

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	43.4	34.3	31.7	6.2	31.6	0.3	49.6	40.8	73.9	53.9	24.3	13.1	*1)
Vert.	5350.0	41.4	32.8	31.7	6.2	31.6	0.3	47.6	39.3	73.9	53.9	26.3	14.6	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.



\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (242-tone RU)

#### RU Index 64

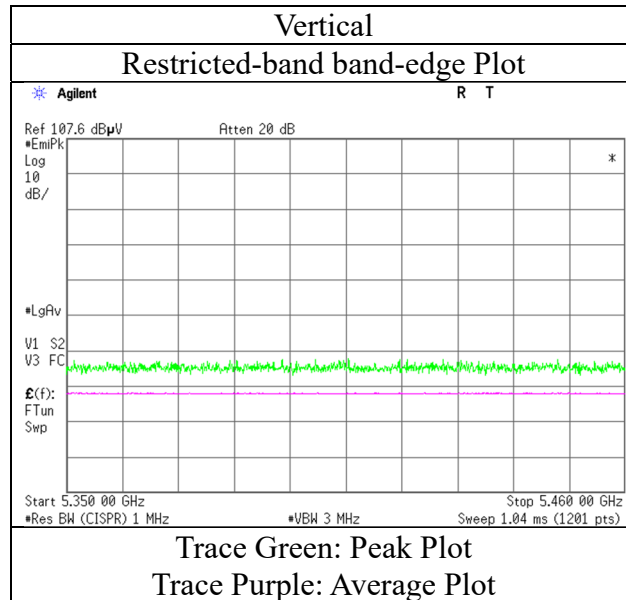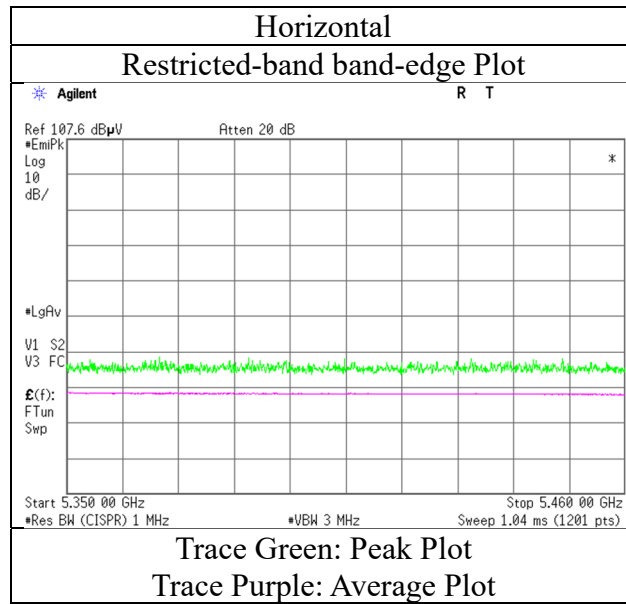

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (484-tone RU)

### RU Index 66

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	42.5	34.4	31.7	6.2	31.6	0.2	48.7	40.9	73.9	53.9	25.2	13.0	*1)
Vert.	5350.0	41.7	32.8	31.7	6.2	31.6	0.2	47.9	39.2	73.9	53.9	26.0	14.7	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.



\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$

### Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (484-tone RU)

#### RU Index 66

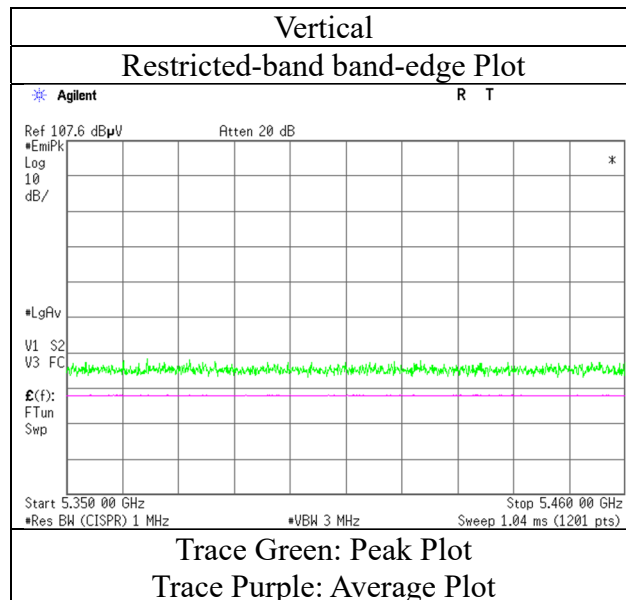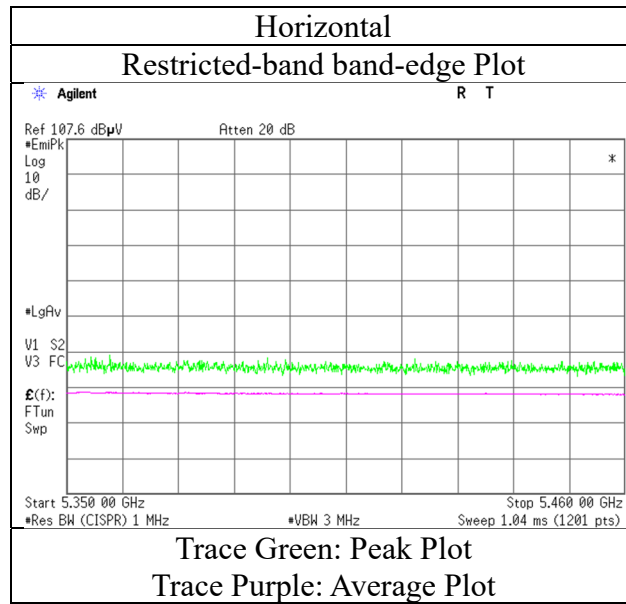

\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions. Final result of restricted band edge was shown in tabular data.

## Radiated Spurious Emission

Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.3
Date	January 21, 2022
Temperature / Humidity	22 deg. C / 32 % RH
Engineer	Nachi Konegawa (1 GHz - 10 GHz)
Mode	Tx 11ax-80 5290 MHz (996-tone RU)

### RU Index 67

Polarity	Frequency	Reading (QP / PK)	Reading (AV)	Ant. Factor	Loss	Gain	Duty Factor	Result (QP / PK)	Result (AV)	Limit (QP / PK)	Limit (AV)	Margin (QP / PK)	Margin (AV)	Remark
[Hori/Vert]	[MHz]	[dBuV]	[dBuV]	[dB/m]	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dBuV/m]	[dB]	[dB]	
Hori.	5350.0	46.8	37.9	31.7	6.2	31.6	0.2	53.0	44.4	73.9	53.9	20.9	9.6	*1)
Vert.	5350.0	43.6	34.6	31.7	6.2	31.6	0.2	49.8	41.1	73.9	53.9	24.1	12.8	*1)

Result (QP / PK) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Result (AV) = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier) + Duty factor

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

\*1) Not Out of Band emission(Leakage Power)

Distance factor:	1 GHz - 10 GHz	$20\log(3.9\text{ m} / 3.0\text{ m}) = 2.28\text{ dB}$
	10 GHz - 40 GHz	$20\log(1.0\text{ m} / 3.0\text{ m}) = -9.5\text{ dB}$