

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (1) / (89) Pages

1. Applicant

- Name : Sony Group Corporation
- Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
- Date of Receipt : 2022-09-23

2. Manufacturer

- Name : Sony Group Corporation
- Address : 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

3. Use of Report : For FCC Conformance / ISED Conformance

4. Test Sample / Model: Wireless Noise Canceling Stereo Headset / YY2968

5. Date of Test : 2022-09-27 to 2022-10-05

6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247
ISED RSS-247 & RSS-Gen

7. Testing Environment: Temp.: (23 ± 1) °C, Humidity: (51 ± 3) % R.H.

8. Test Results : Compliance

9. Location of Test : Permanent Testing Lab On Site Testing

(Address : 5, Dongbu-ro 221beon-gil, Cheoin-gu, Yong-in-si, Gyeonggi-do, Korea)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

This report cannot be reproduced or copied without the written consent of CTK.

Approval	Tested by	Technical Manager
	Ji-Hye, Kim: (Signature) 	Won-Jae, Hwang: (Signature) 

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2022-11-17

CTK Co., Ltd.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (2) / (89) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2022-11-17	Issued (CTK-2022-02964)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (3) / (89) Pages

CONTENTS

1. General Product Description	4
1.1 Applicant Information	4
1.2 Product Information	4
1.3 Peripheral Devices	4
1.4 Model Differences	4
2. Accreditations	5
2.1 Laboratory Accreditations and Listings	5
2.2 Calibration Details of Equipment Used for Measurement	5
3. Test Specifications	6
3.1 Standards	6
3.2 Mode of operation during the test	7
3.3 Maximum Measurement Uncertainty	7
3.4 Test Software	7
4. Technical Characteristic Test	8
4.1 Carrier Frequency Separation	8
4.2 Number of Hopping Frequencies	11
4.3 20 dB bandwidth & 99% Bandwidth	16
4.4 Time of Occupancy	22
4.5 Maximum peak Conducted Output Power	32
4.6 Unwanted Emissions (Conducted)	42
4.7 Radiated Emission	63
4.8 AC Power Line Conducted Emissions	84
4.9 Frequency Hopping System Requirements	87
APPENDIX A – Test Equipment Used For Tests	89



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (4) / (89) Pages

1. General Product Description

1.1 Applicant Information

Company	Sony Group Corporation
Contact Point	1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan
Contact Person	Name : Takeshi Kobayshi E-mail : shes-qa-cs-vsqa-pc1_pses@sony.com Tel : +81-50-3750-0068 Fax : -

1.2 Product Information

FCC ID	AK8YY2968
ISED	409B-YY2968
Product Description	Wireless Noise Canceling Stereo Headset
Model name	YY2968
Variant Model name	-
Operating Frequency	2 402 MHz - 2 480 MHz
RF Output Power	GFSK : 8.267 dBm (6.710 mW) 8-DPSK : 9.333 dBm (8.576 mW)
Antenna Specification	Antenna type : FPCB antenna Earbuds (L) Peak Gain : -5.37 dBi Earbuds (R) Peak Gain : -7.02 dBi
Number of channels	79
Channel Spacing	1 MHz
Type of Modulation	GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps)
Power Source	DC 3.85 V (Battery)
Hardware Rev	V1.0
Software Rev	V1.0

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253R6N
AC/DC Adapter	HP	HSTNN-CA40	-

1.4 Model Differences

Not applicable



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (5) / (89) Pages

2. Accreditations

2.1 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A
KOREA	NRRA	KR0025

2.2 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (6) / (89) Pages

3. Test Specifications

3.1 Standards

Section in FCC	Section in RSS	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	RSS-247 5.1(b)	Carrier Frequency Separation	C	Conducted
15.247(a)	RSS-247 5.1(d)	Number of Hopping Frequencies	C	
15.247(a)	RSS-247 5.1(a)	20 dB Bandwidth	C	
15.247(a)	RSS-247 5.1(d)	Time of occupancy (Dwell Time)	C	
15.247(b)	RSS-247 5.4(b)	Maximum peak conducted output power	C	
15.247(d)	RSS-247 5.5	Unwanted emission	C	
15.209	RSS-Gen 6.13	Radiated emission	C	Radiated
15.207(a)	RSS-Gen 8.8	AC Conducted Emission	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable				
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.				
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013, RSS-247 Issue 2, RSS-GEN Issue 5				



3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 441 MHz	2 480 MHz

Test mode

Modulation	Packet type	Data rate	Duty Cycle	
			Earbuds (L)	Earbuds (R)
GFSK	DH5	1 Mbps	77.1 %	77.3 %
8-DPSK	3-DH5	3 Mbps	77.7 %	77.1 %

3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter. Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L.: Approx. 95 %, $k = 2$)
Occupied Bandwidth	0.1 MHz (C.L.: Approx. 95 %, $k = 2$)
Unwanted Emission(conducted)	3.0 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 1$ GHz)	3.88 dB (C.L.: Approx. 95 %, $k = 2$)
Radiated Emissions ($f > 1$ GHz)	4.62 dB (C.L.: Approx. 95 %, $k = 2$)
Line Conducted Emission	2.06 dB (C.L.: Approx. 95 %, $k = 2$)

3.4 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	EP5RE Ver. 6.0.1.0, ES10 Ver. 10.001
Line Conducted Test	EMC32 Ver. 8.50.0

4. Technical Characteristic Test

4.1 Carrier Frequency Separation

Test Procedures

ANSI C63.10-2013 - Section 7.8.2

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled. After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

- a) Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)
- b) RBW = 30 kHz (Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel)
- c) VBW = 30 kHz (\geq RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold

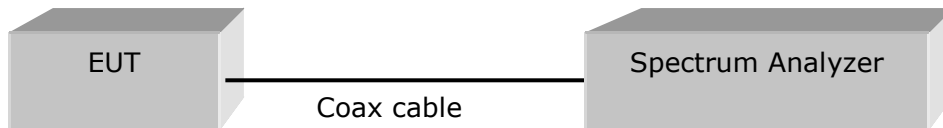


Figure 1 : Measurement setup for the carrier frequency separation

Limit

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Results

Test mode : GFSK

EUT	Channel	Adjacent Hopping Channel Separation [kHz]	Two-third of 20dB bandwidth [kHz]	Minimum Bandwidth [kHz]	Result
Earbuds (L)	Middle	1 000	642.9	25	Complies
Earbuds (R)		1 000	642.9	25	Complies

Test mode : 8-DPSK

EUT	Channel	Adjacent Hopping Channel Separation [kHz]	Two-third of 20dB bandwidth [kHz]	Minimum Bandwidth [kHz]	Result
Earbuds (L)	Middle	1 000	847.3	25	Complies
Earbuds (R)		1 000	849.3	25	Complies


See next pages for actual measured spectrum plots.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (9) / (89) Pages

Test mode : GFSK_Earbuds (L)

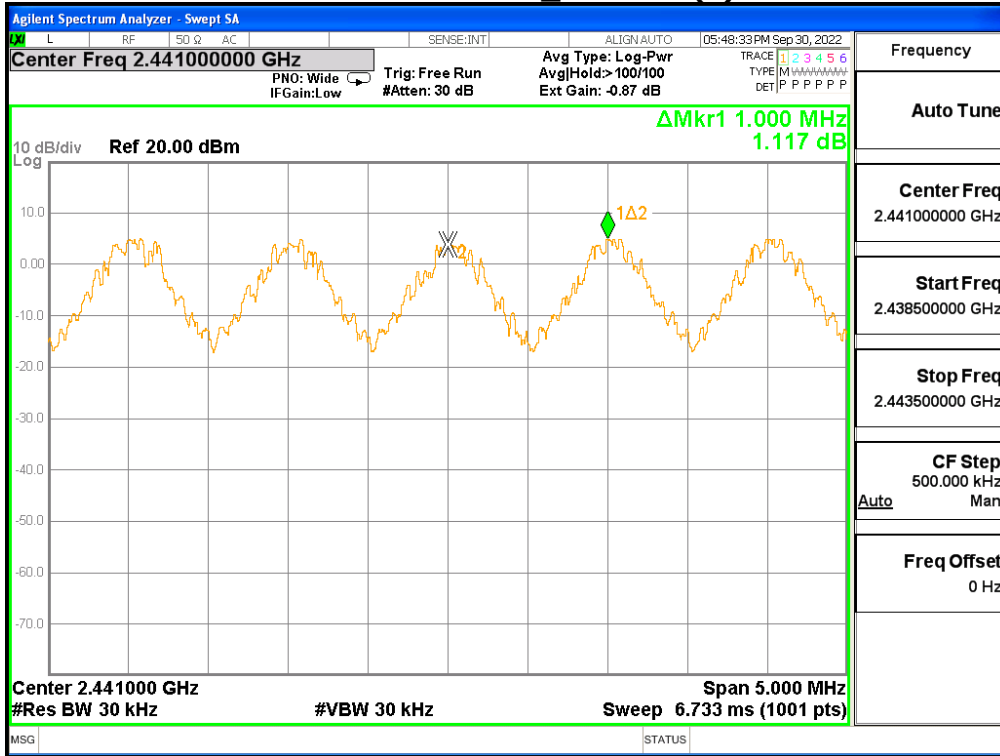

Test mode : GFSK_Earbuds (R)

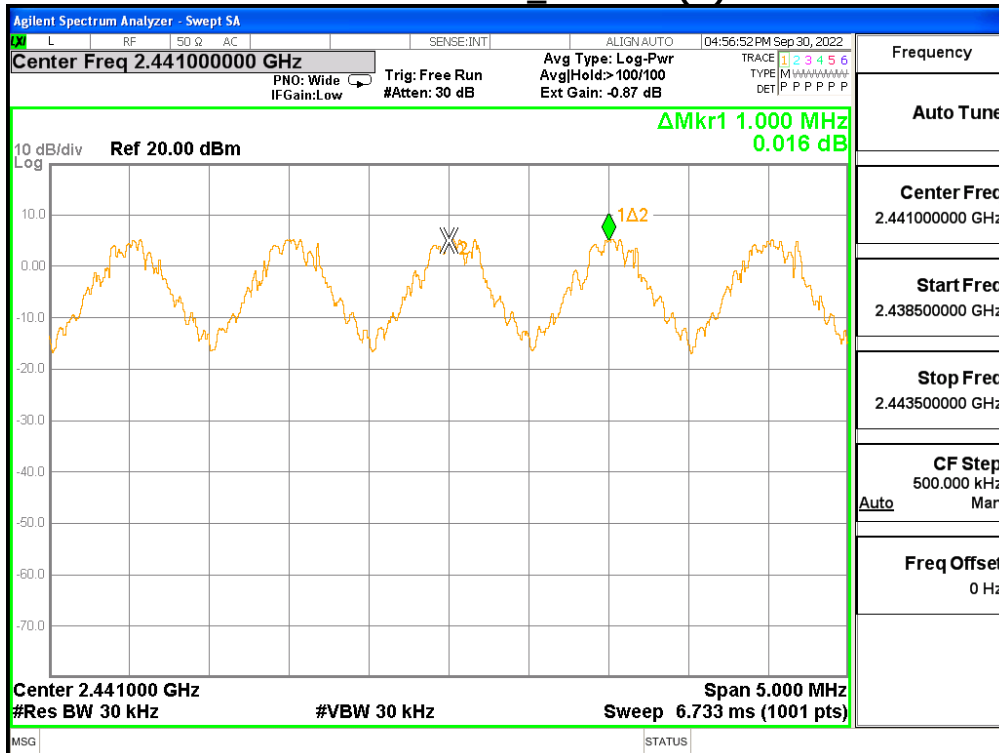

4.2 Number of Hopping Frequencies


Test Procedures

ANSI C63.10-2013 - Section 7.8.3

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

- a) Frequency range 1: Start = 2389.5 MHz, Stop = 2439.5 MHz
 2: Start = 2439.5 MHz, Stop = 2489.5 MHz
- b) RBW = 300 kHz (To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller)
- c) VBW = 300 kHz (\geq RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold

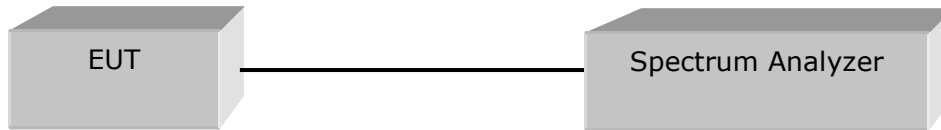

Limit

FHSs operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

Test Results

Test mode : GFSK

EUT	Total number of Hopping Channels	Result
Earbuds (L)	79	Complies
Earbuds (R)	79	Complies

Test mode : 8-DPSK

EUT	Total number of Hopping Channels	Result
Earbuds (L)	79	Complies
Earbuds (R)	79	Complies



See next pages for actual measured spectrum plots.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (12) / (89) Pages

Test Mode : GFSK_Earbuds (L)

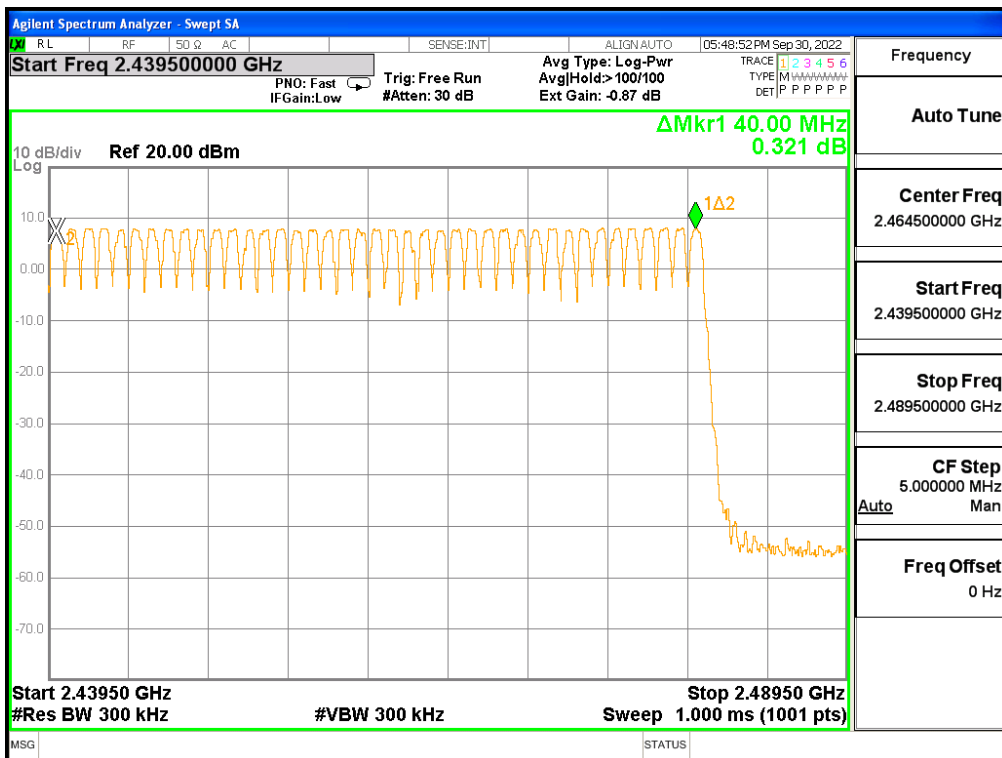
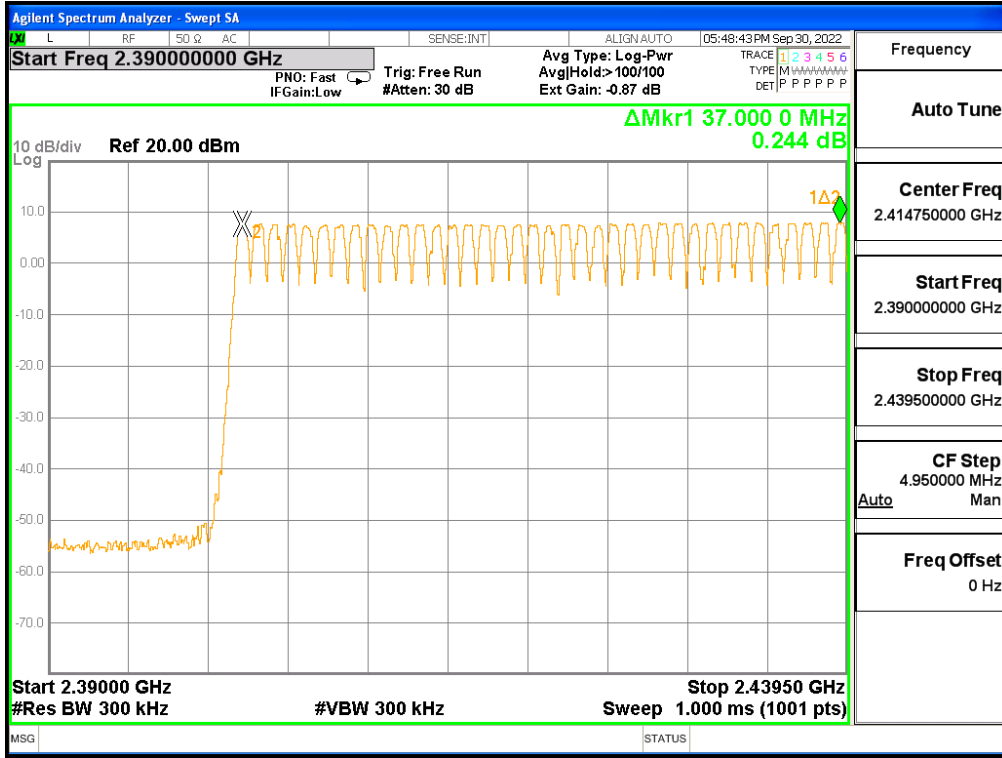




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (13) / (89) Pages

Test Mode : GFSK_Earbuds (R)

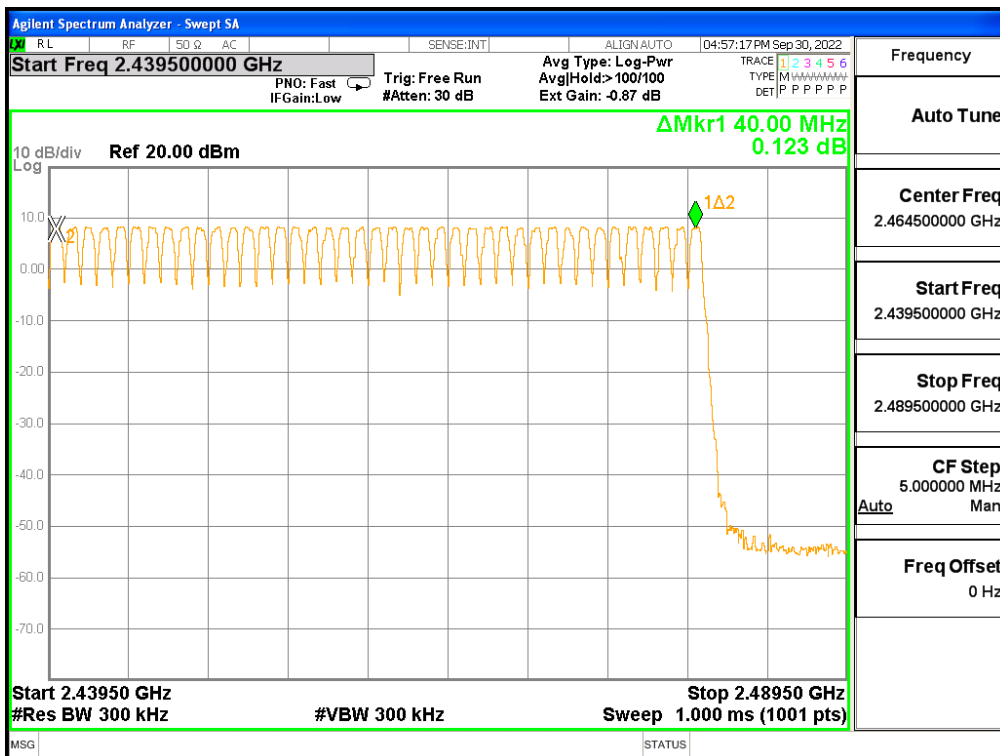
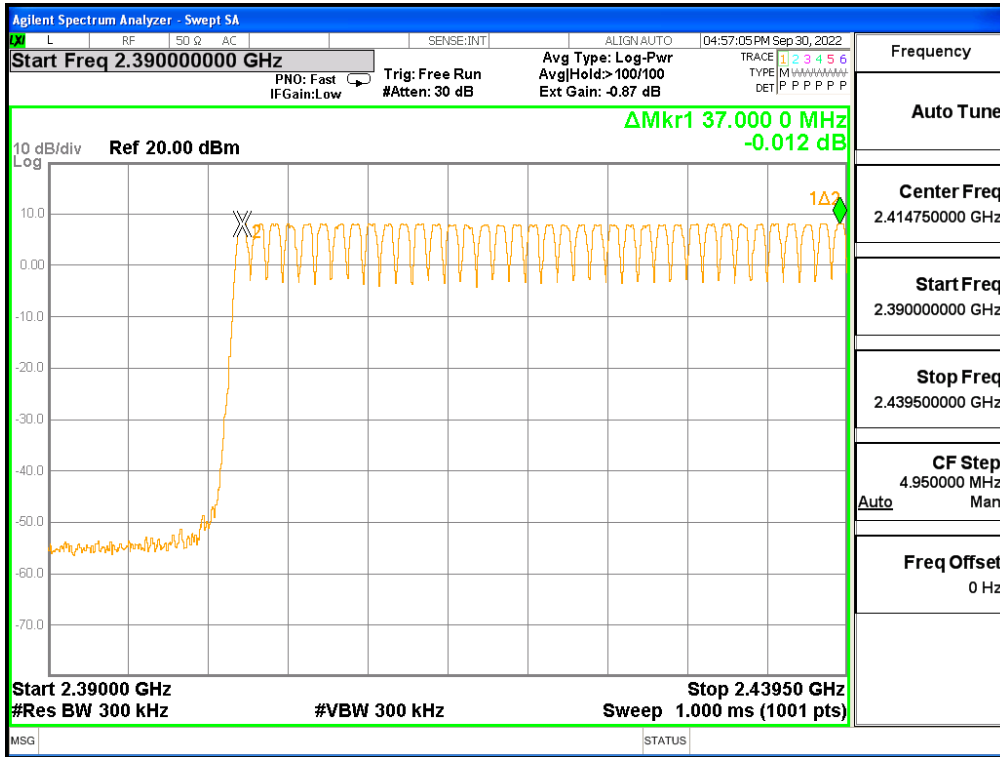




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (14) / (89) Pages

Test Mode : 8-DPSK_Earbuds (L)

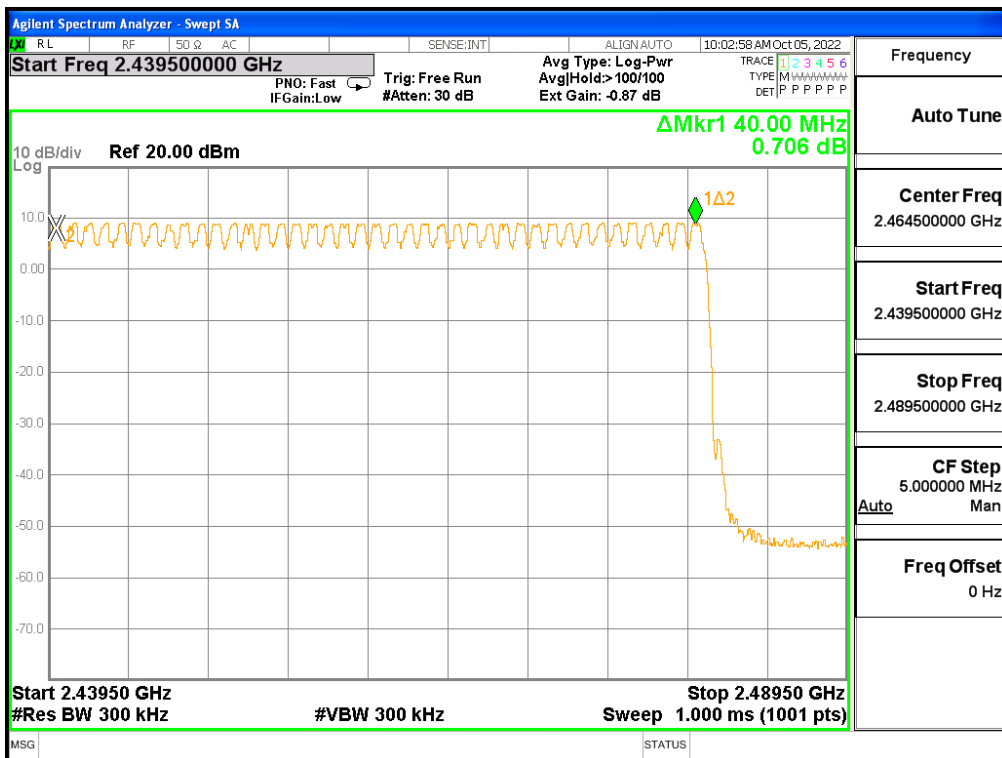
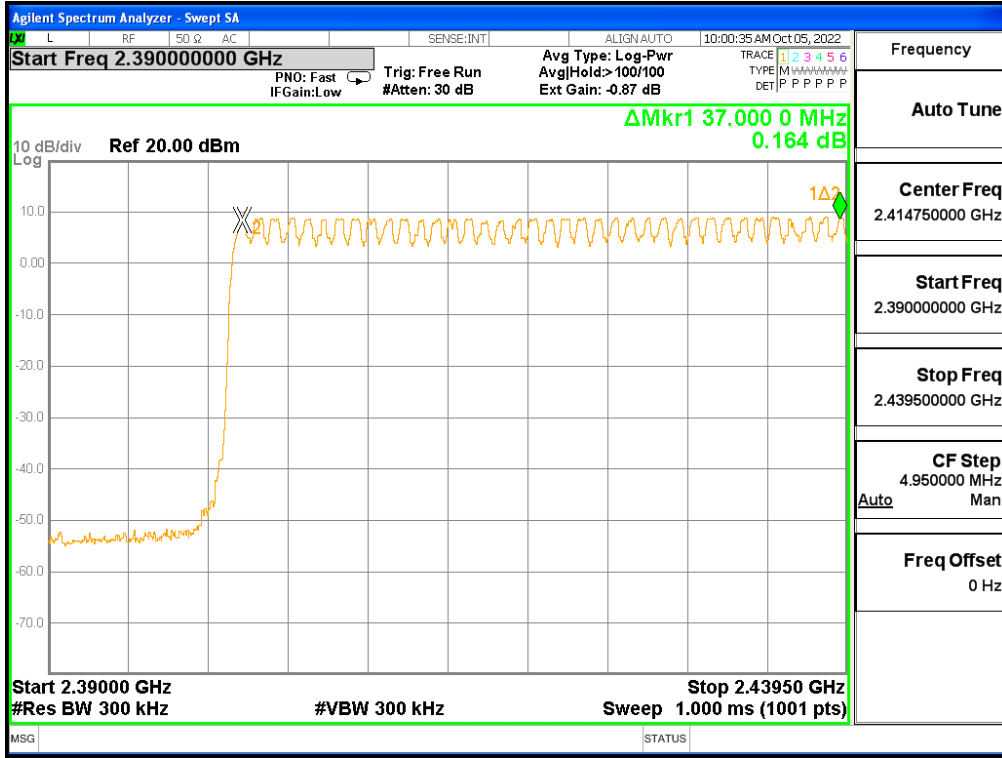




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (15) / (89) Pages

Test Mode : 8-DPSK_Earbuds (R)

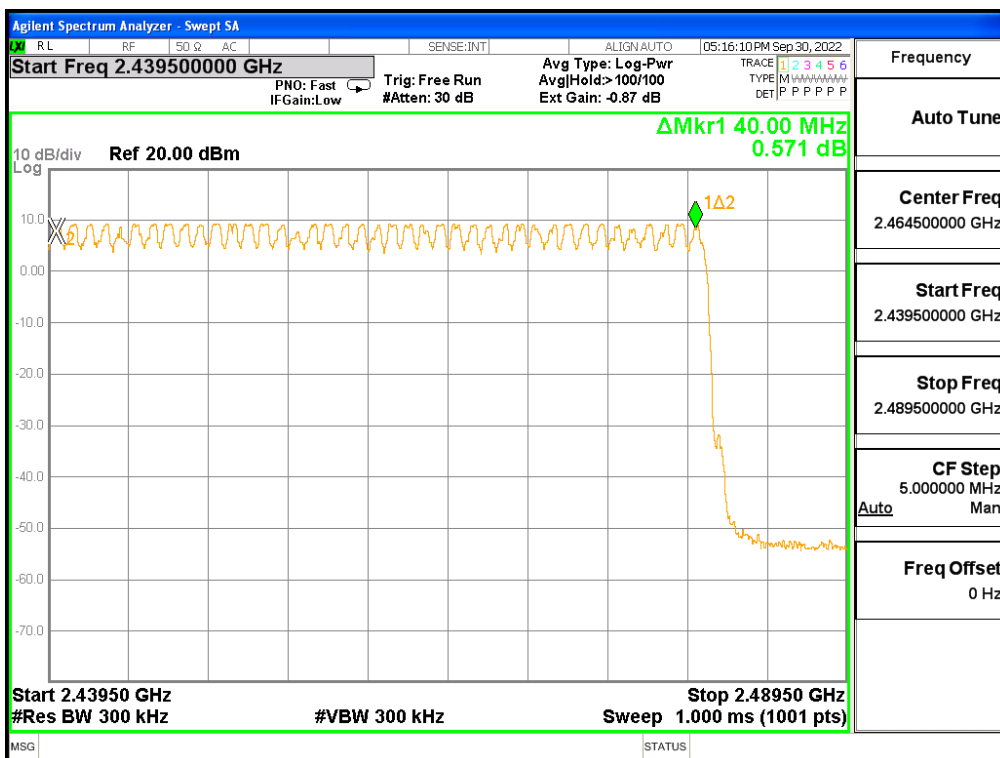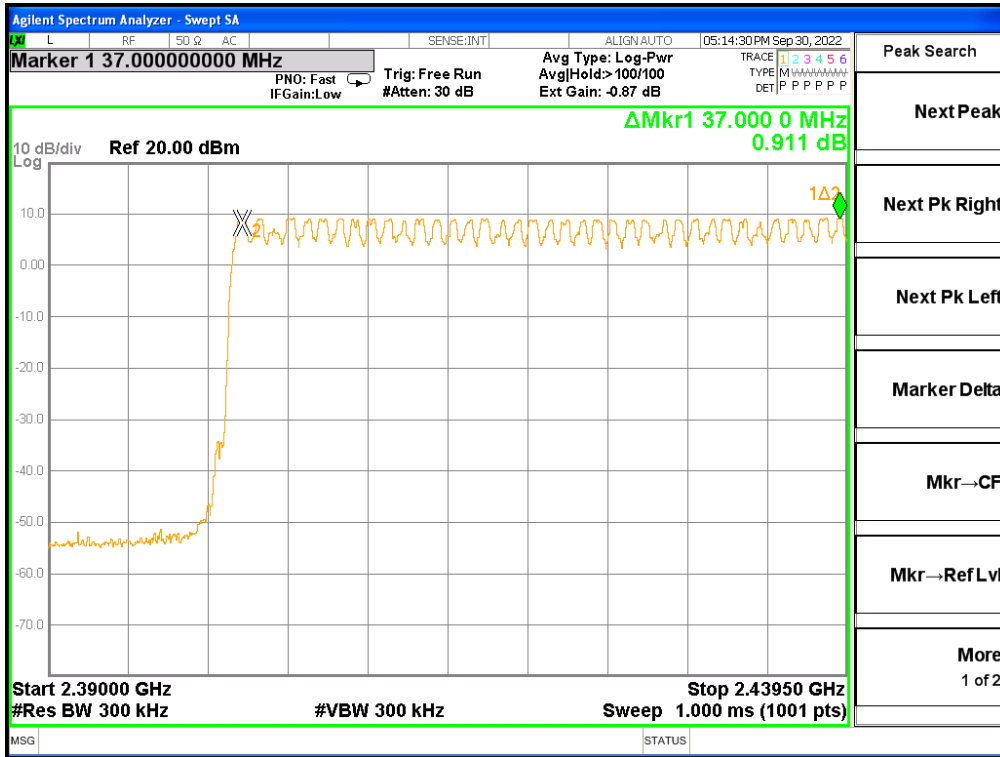

4.3 20 dB bandwidth & 99% Bandwidth

Test Procedures

ANSI C63.10-2013 - Section 6.9.2
RSS-GEN Issue 5 - Section 6.7

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 - Section 6.9.3
RSS-GEN Issue 5 - Section 6.7


The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

- a) Span = 3 MHz (between 2 times and 5 times the OBW)
- b) RBW = 30 kHz (1% to 5% of the OBW)
- c) VBW = 100 kHz (approximately 3 times RBW)
- d) Sweep = auto
- e) Detector function = peak
- f) Trace = max hold

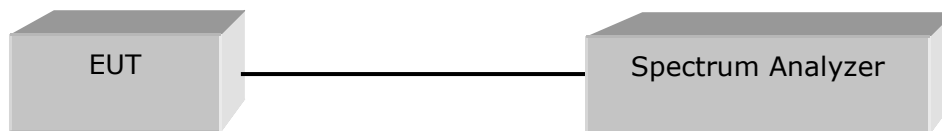

Limit

Limit : N/A

Test Results

Test mode : GFSK

EUT	Frequency [MHz]	Channel No.	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]	Result
Earbuds (L)	2 402	0	0.966	0.883	Complies
	2 441	39	0.964	0.883	Complies
	2 480	78	0.966	0.884	Complies
Earbuds (R)	2 402	0	0.966	0.883	Complies
	2 441	39	0.964	0.886	Complies
	2 480	78	0.967	0.885	Complies

Test mode : 8-DPSK

EUT	Frequency [MHz]	Channel No.	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]	Result
Earbuds (L)	2 402	0	1.270	1.154	Complies
	2 441	39	1.271	1.154	Complies
	2 480	78	1.272	1.155	Complies
Earbuds (R)	2 402	0	1.273	1.157	Complies
	2 441	39	1.274	1.156	Complies
	2 480	78	1.273	1.157	Complies


See next pages for actual measured spectrum plots.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (18) / (89) Pages

Test mode : GFSK_Earbuds (L)

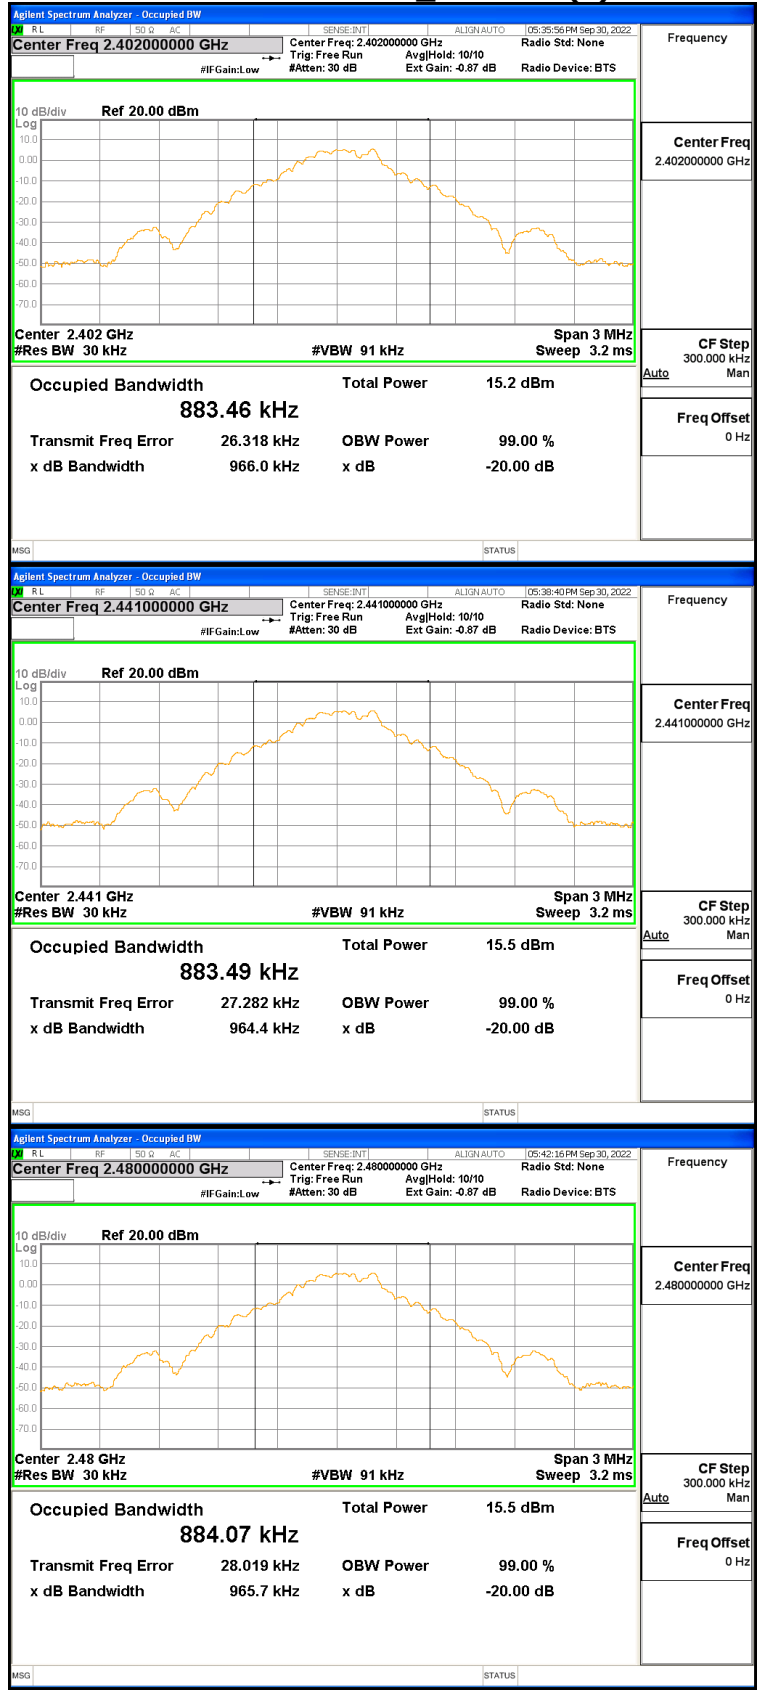




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (19) / (89) Pages

Test mode : GFSK Earbuds (R)

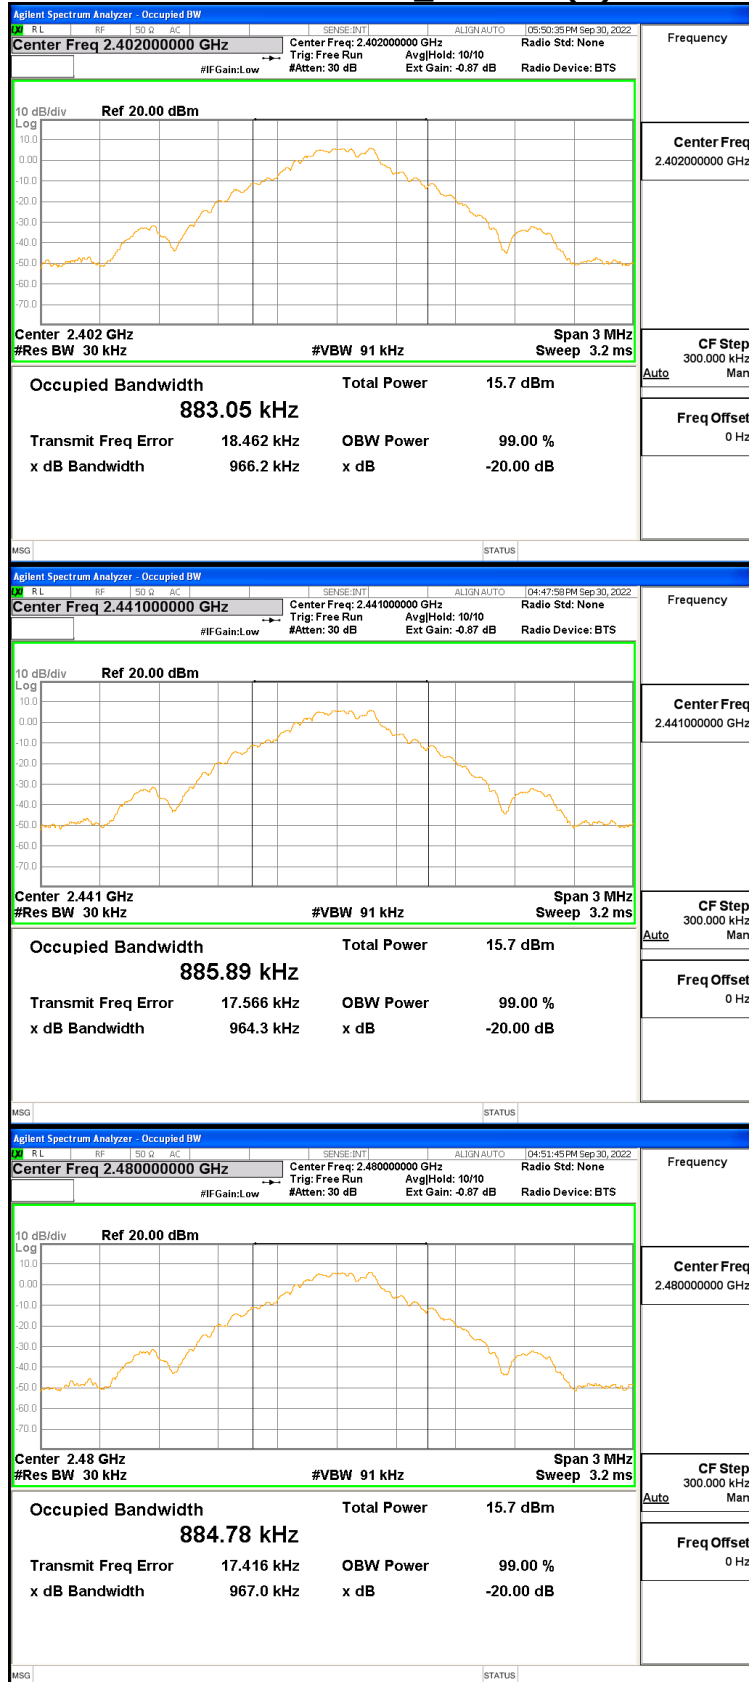




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (20) / (89) Pages

Test mode : 8-DPSK_Earbuds (L)

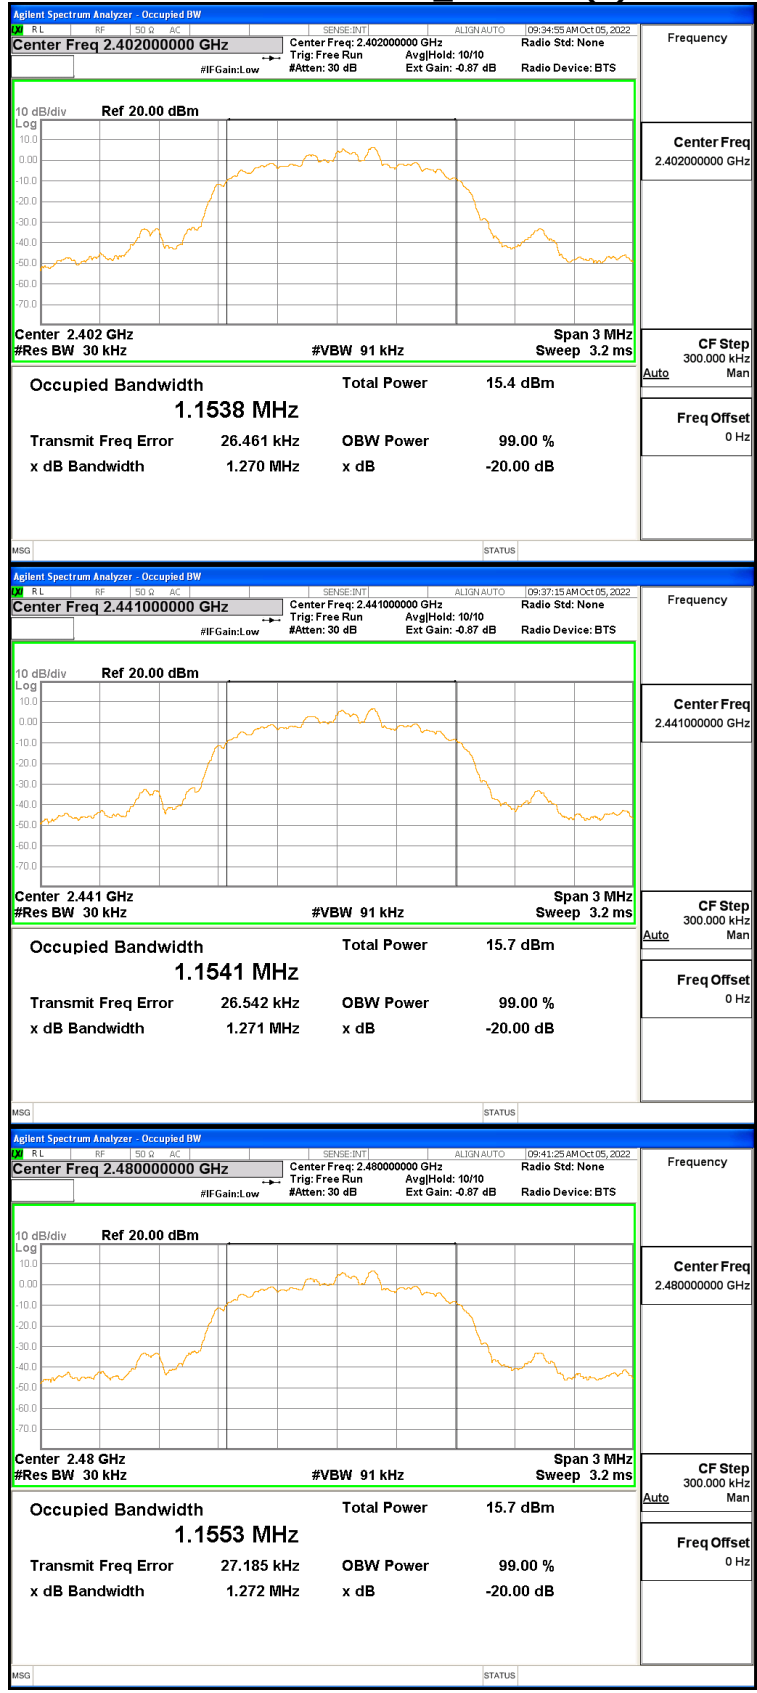




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (21) / (89) Pages

Test mode : 8-DPSK Earbuds (R)

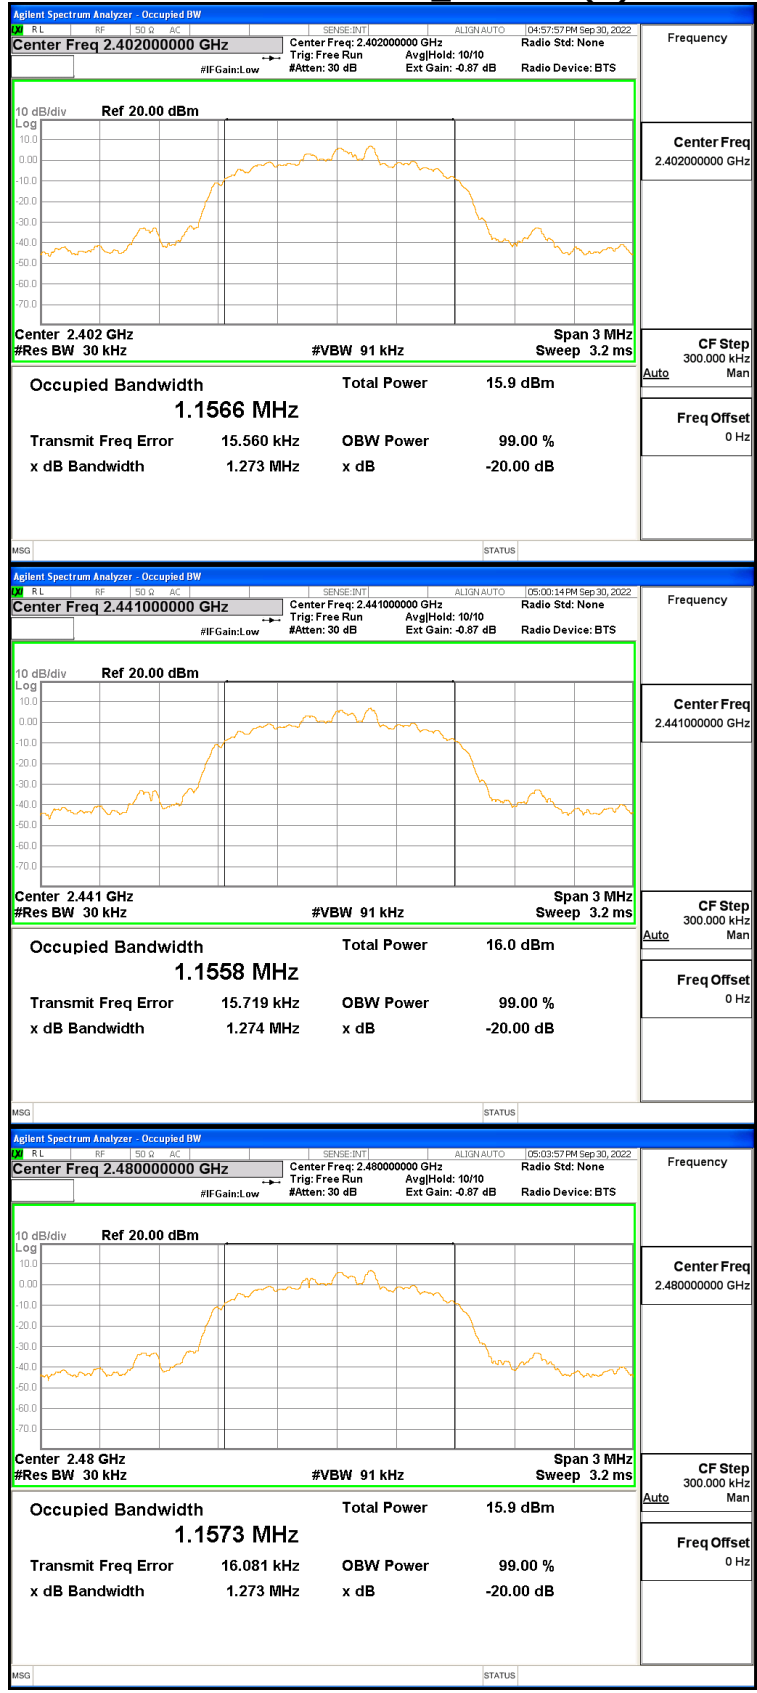

4.4 Time of Occupancy

Test Procedures

ANSI C63.10-2013 - Section 7.8.4


The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the Earbuds (R) of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

Number of hops in the period specified in the requirements =
(number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

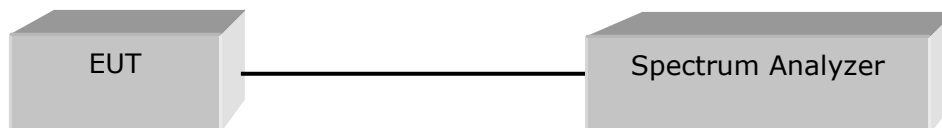

Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Results

Test mode : GFSK

EUT	Mode	Number of hops Channels	Transmit time per hop(msec)	Result (msec)	Limit (msec)
Earbuds (L)	DH1	79	0.391	125.12	400
	DH3	79	1.645	263.20	400
	DH5	79	2.890	308.27	400
Earbuds (R)	DH1	79	0.390	124.80	400
	DH3	79	1.646	263.36	400
	DH5	79	2.891	308.37	400

Test mode : 8-DPSK

EUT	Mode	Number of hops Channels	Transmit time per hop(msec)	Result (msec)	Limit (msec)
Earbuds (L)	3DH1	79	0.396	126.72	400
	3DH3	79	1.647	263.52	400
	3DH5	79	2.897	309.01	400
Earbuds (R)	3DH1	79	0.394	126.08	400
	3DH3	79	1.642	262.72	400
	3DH5	79	2.892	308.48	400

※ Remark:

Average time of occupancy = Transmit time per hop * Number of hopping channels in 31.6s

According the BLUETOOTH STANDARD SPECIFICATION, the nominal hop rate is 1600 hop/s.

All bluetooth units participating in the piconet are time and hop synchronized to the channel.


- The maximum number of hopping channels in 31.6s for DH1 = $1600 / 2 / 79 * 31.6 = 320$

- The maximum number of hopping channels in 31.6s for DH3 = $1600 / 4 / 79 * 31.6 = 160$


- The maximum number of hopping channels in 31.6s for DH5 = $1600 / 6 / 79 * 31.6 = 107$

See next pages for actual measured spectrum plots.

Transmit time for PACKET Type DH1(GFSK_Earbuds (L))

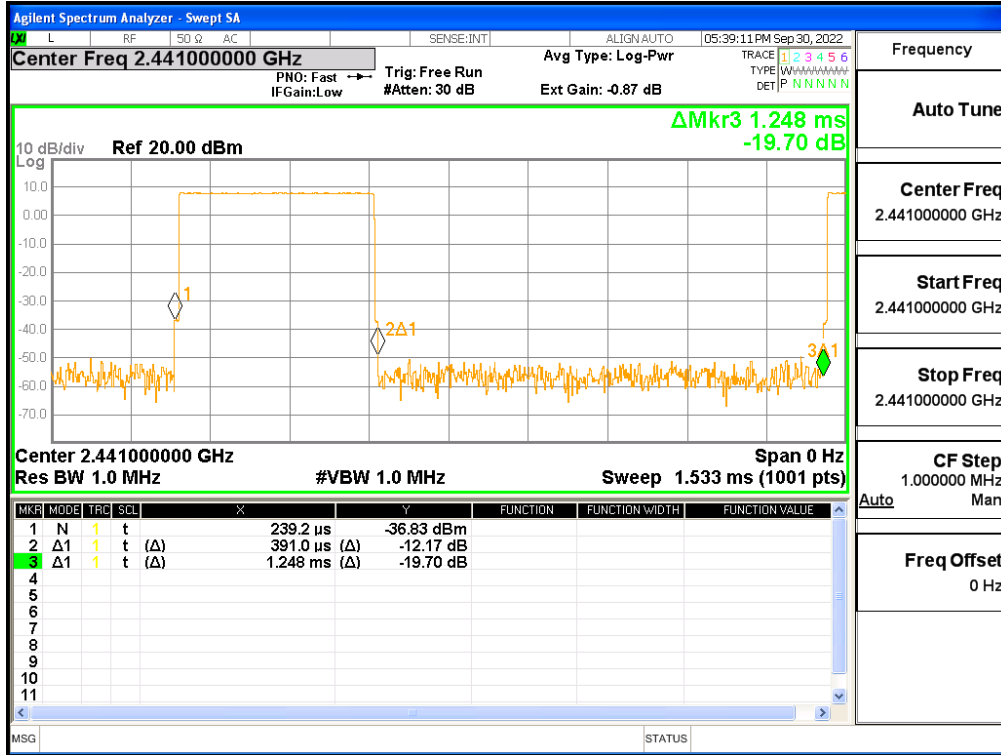

Transmit time for PACKET Type DH3(GFSK_Earbuds (L))

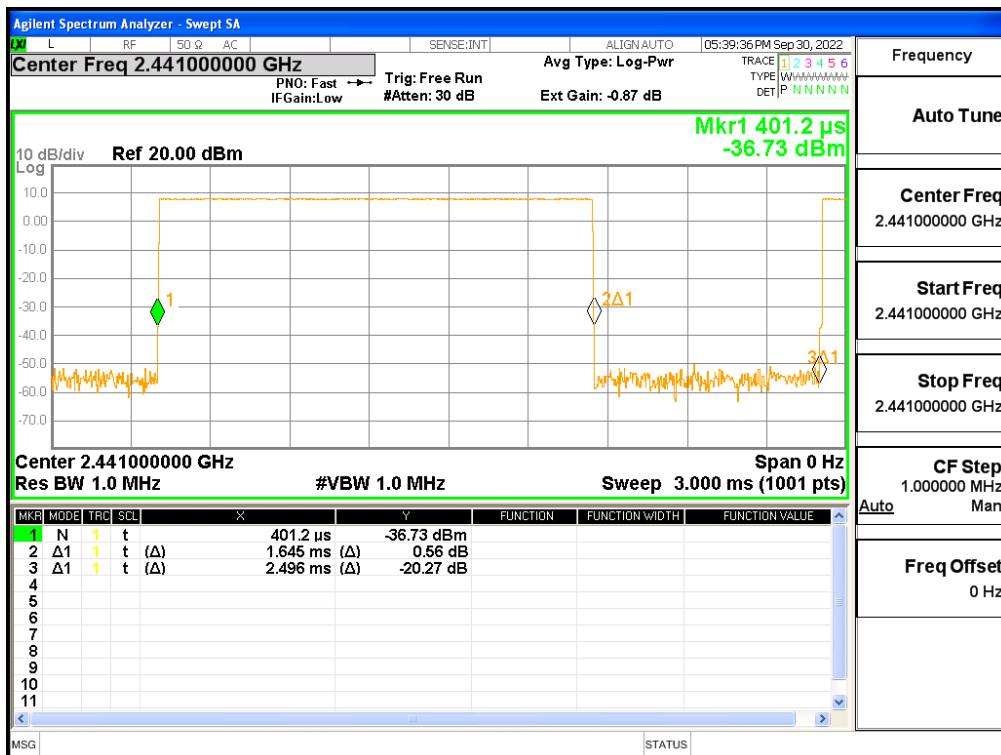




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (25) / (89) Pages

Transmit time for PACKET Type DH5(GFSK_Earbuds (L))

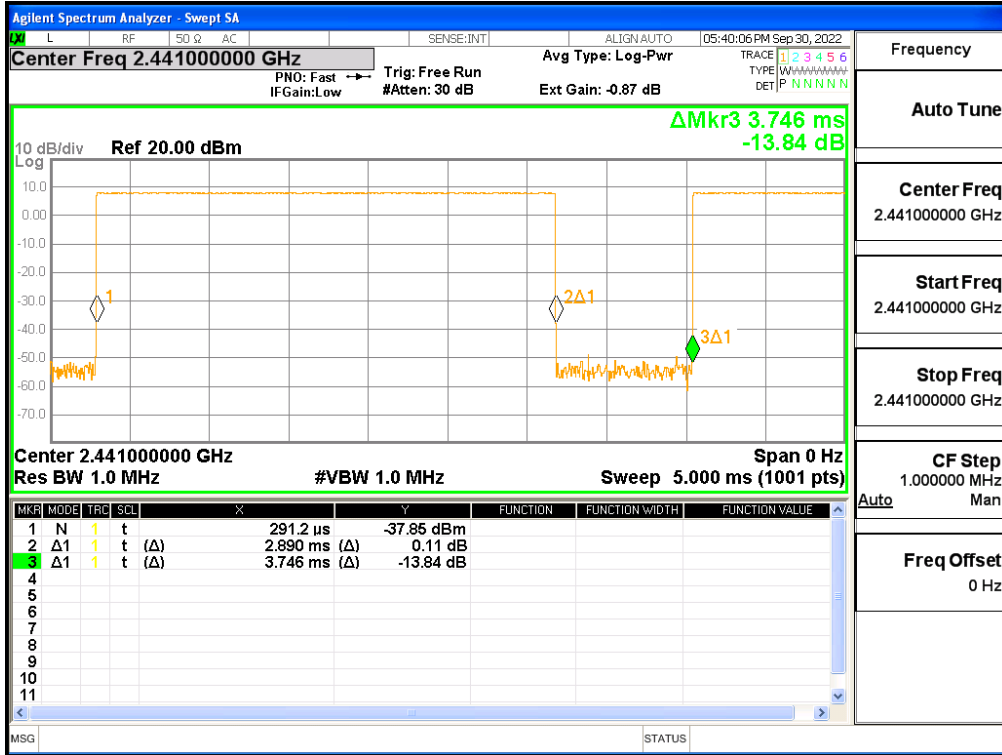





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (26) / (89) Pages

Transmit time for PACKET Type DH1(GFSK_Earbuds (R))

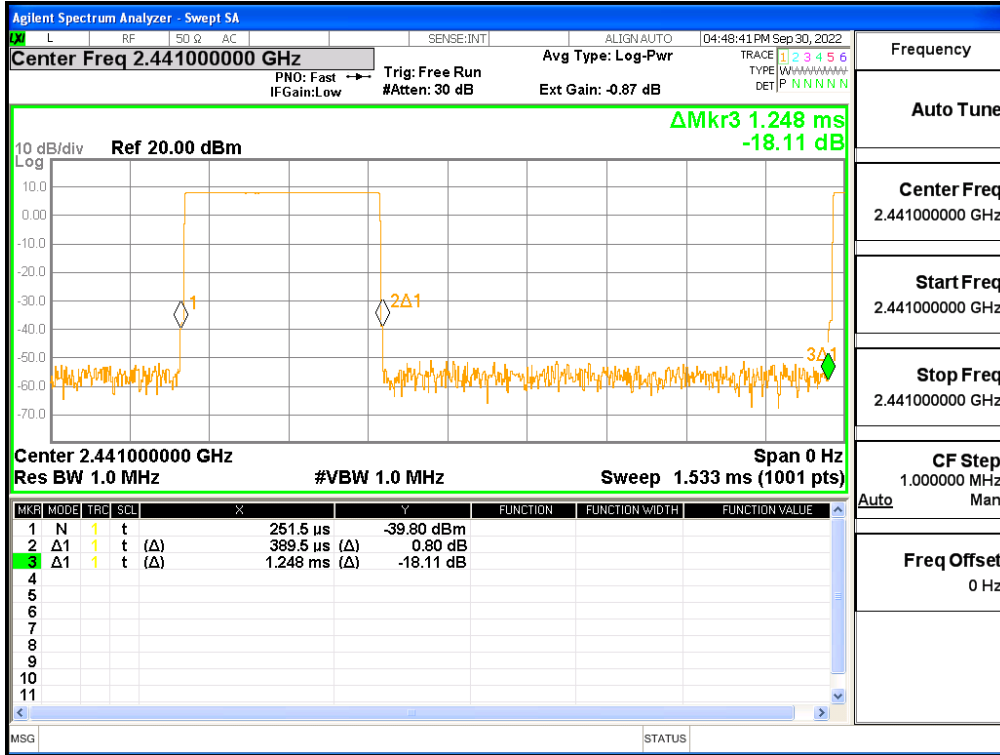

Transmit time for PACKET Type DH3(GFSK_Earbuds (R))

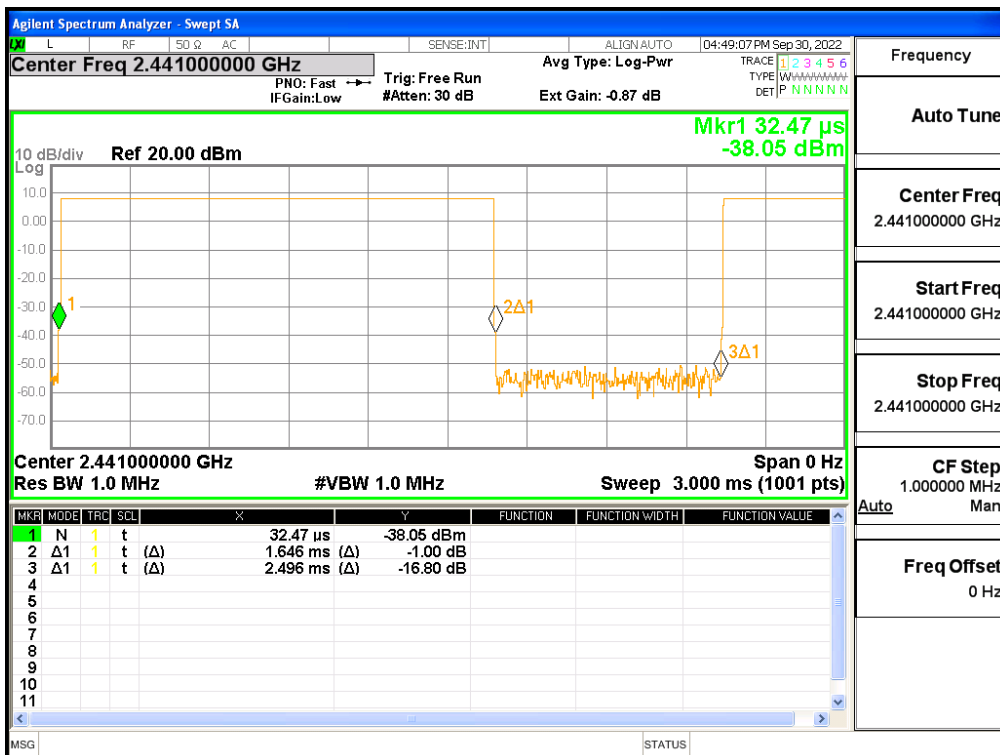



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (27) / (89) Pages

Transmit time for PACKET Type DH5(GFSK_Earbuds (R))







CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (28) / (89) Pages

Transmit time for PACKET Type 3-DH1(8-DPSK_Earbuds (L))

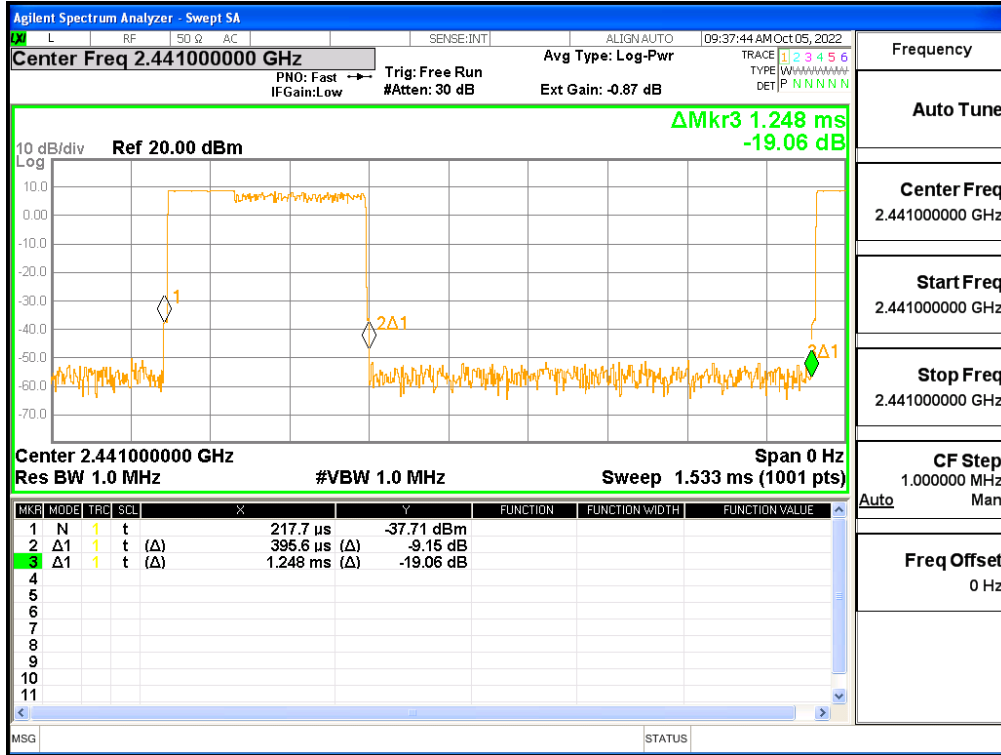

Transmit time for PACKET Type 3-DH3(8-DPSK_Earbuds (L))

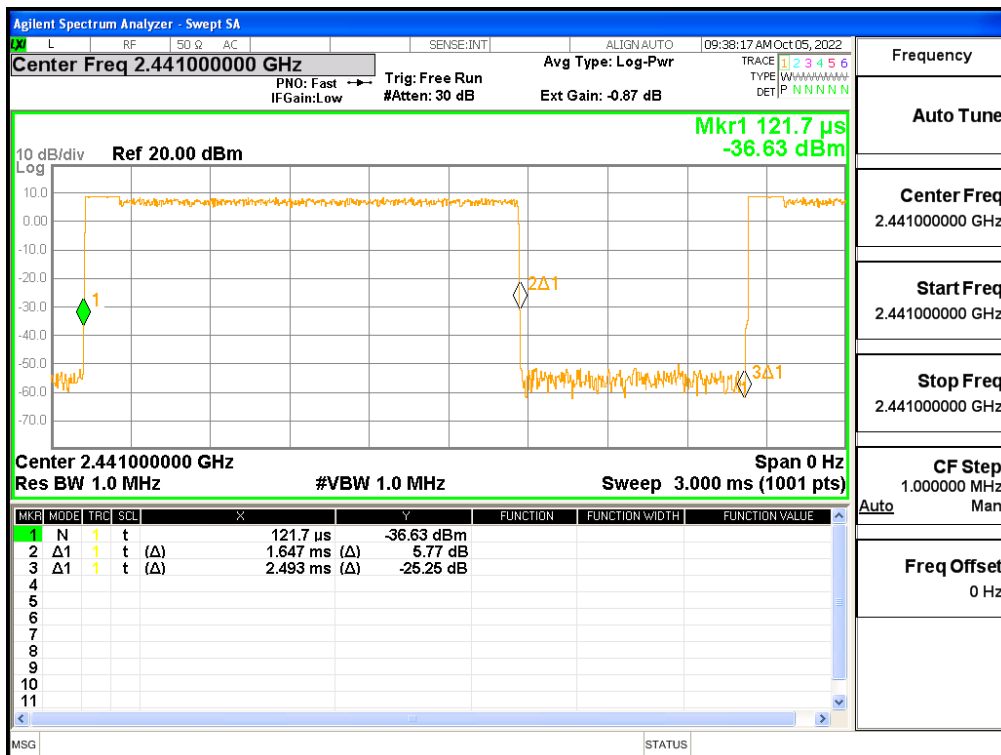




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (29) / (89) Pages

Transmit time for PACKET Type 3-DH5(8-DPSK_Earbuds (L))

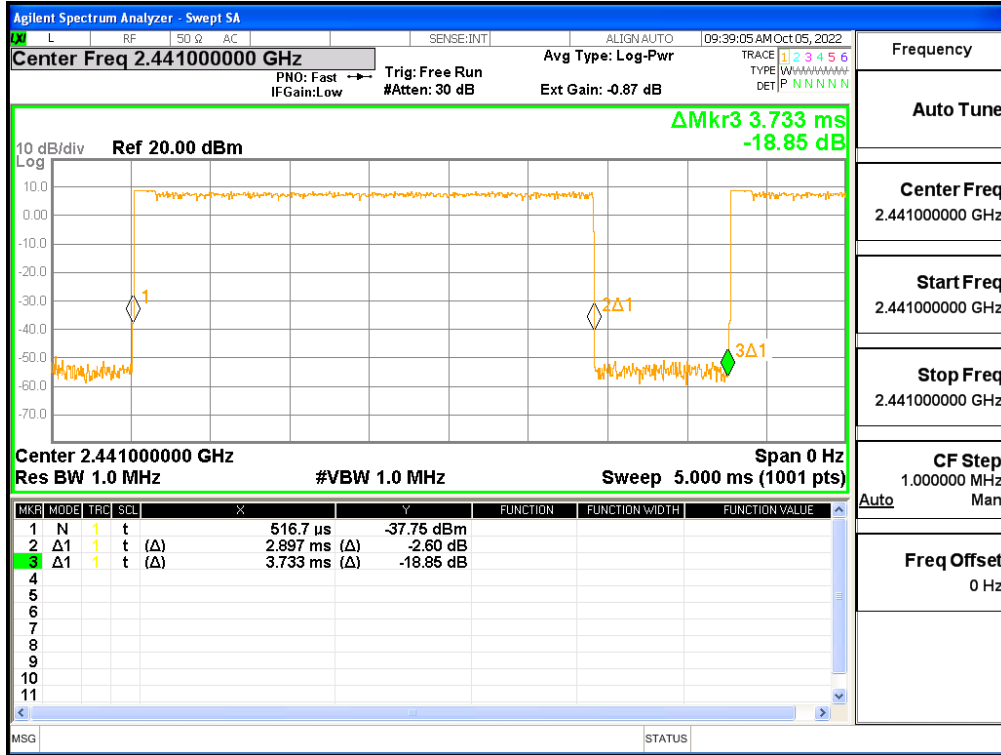





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (30) / (89) Pages

Transmit time for PACKET Type 3-DH1(8-DPSK_Earbuds (R))

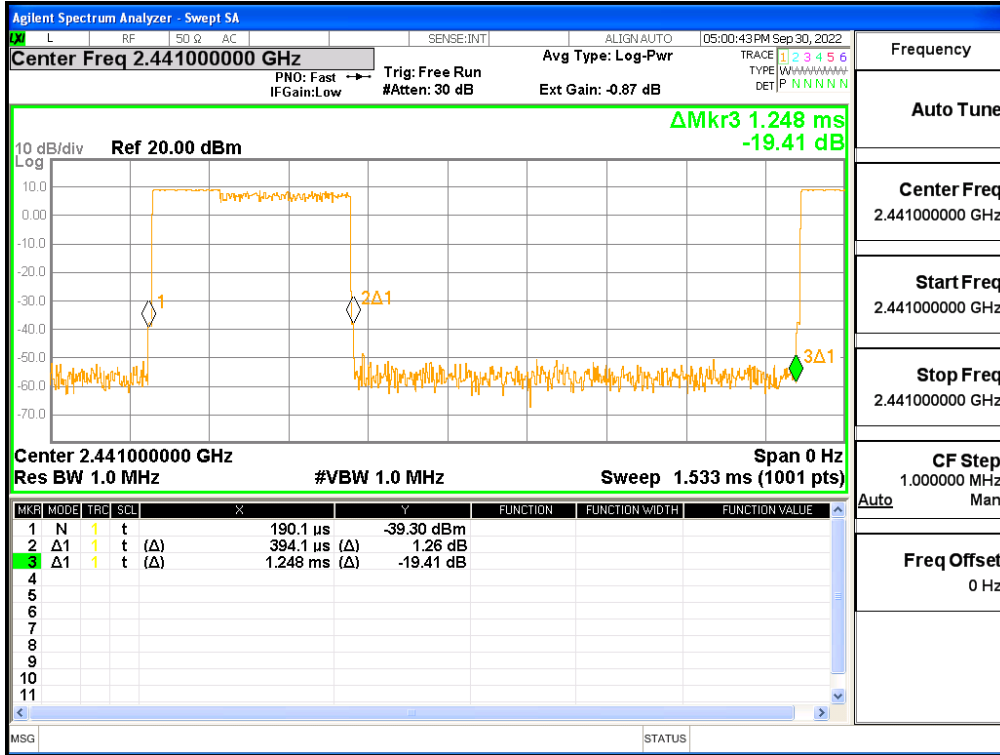

Transmit time for PACKET Type 3-DH3(8-DPSK_Earbuds (R))

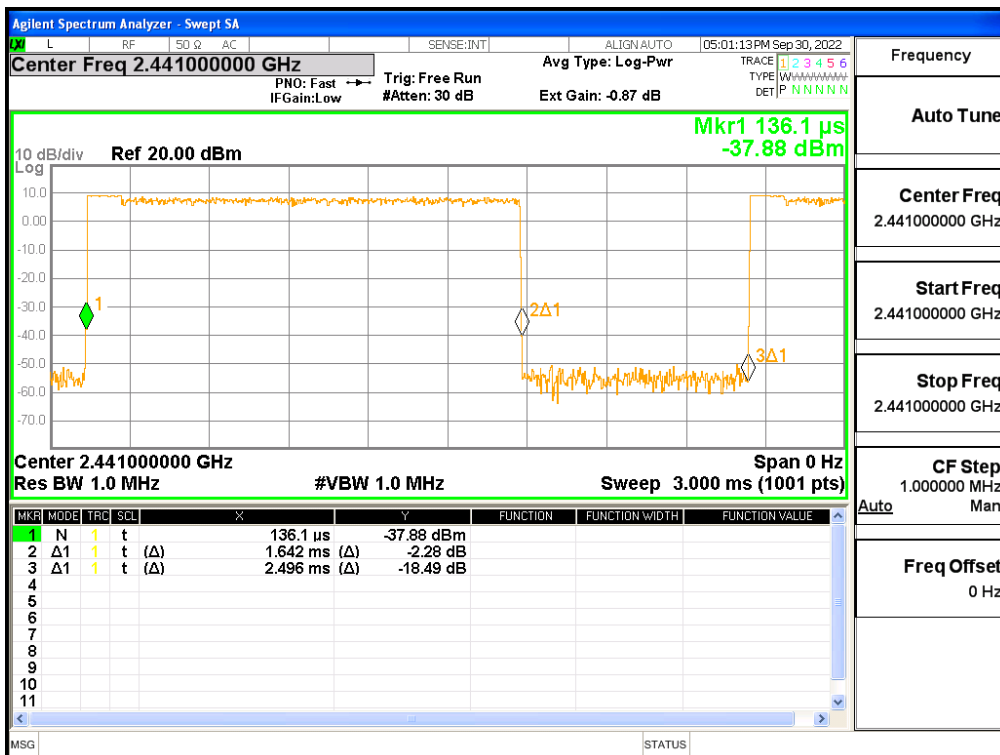



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (31) / (89) Pages

Transmit time for PACKET Type 3-DH5(8-DPSK_Earbuds (R))



4.5 Maximum peak Conducted Output Power

Test Procedures


ANSI C63.10-2013 - Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

- a) Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)
- b) RBW = 3 MHz (greater than the 20 dB bandwidth of the emission being measured)
- c) VBW = 3 MHz (\geq RBW)
- d) Detector = peak
- e) Trace = max hold
- f) Sweep = auto

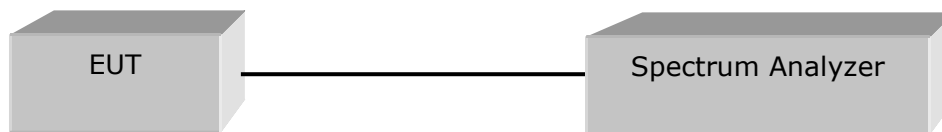

Limit

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W and the e.i.r.p. shall not exceed 4 W if the hopset uses 75 or more hopping channels.



Test Results

Test mode : GFSK

EUT	Frequency [MHz]	Channel No.	Output Power [dBm]	Output power [mW]	Result
Earbuds (L)	2 402	0	7.732	5.932	Complies
	2 441	39	7.985	6.288	Complies
	2 480	78	8.008	6.321	Complies
Earbuds (R)	2 402	0	8.218	6.634	Complies
	2 441	39	8.260	6.699	Complies
	2 480	78	8.267	6.710	Complies

Test mode : 8-DPSK

EUT	Frequency [MHz]	Channel No.	Output Power [dBm]	Output power [mW]	Result
Earbuds (L)	2 402	0	8.864	7.698	Complies
	2 441	39	9.066	8.065	Complies
	2 480	78	9.094	8.117	Complies
Earbuds (R)	2 402	0	9.299	8.509	Complies
	2 441	39	9.333	8.576	Complies
	2 480	78	9.321	8.553	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No.:
 CTK-2022-02964
 Page (34) / (89) Pages

Test Mode : GFSK_Earbuds (L)

[Lowest channel]

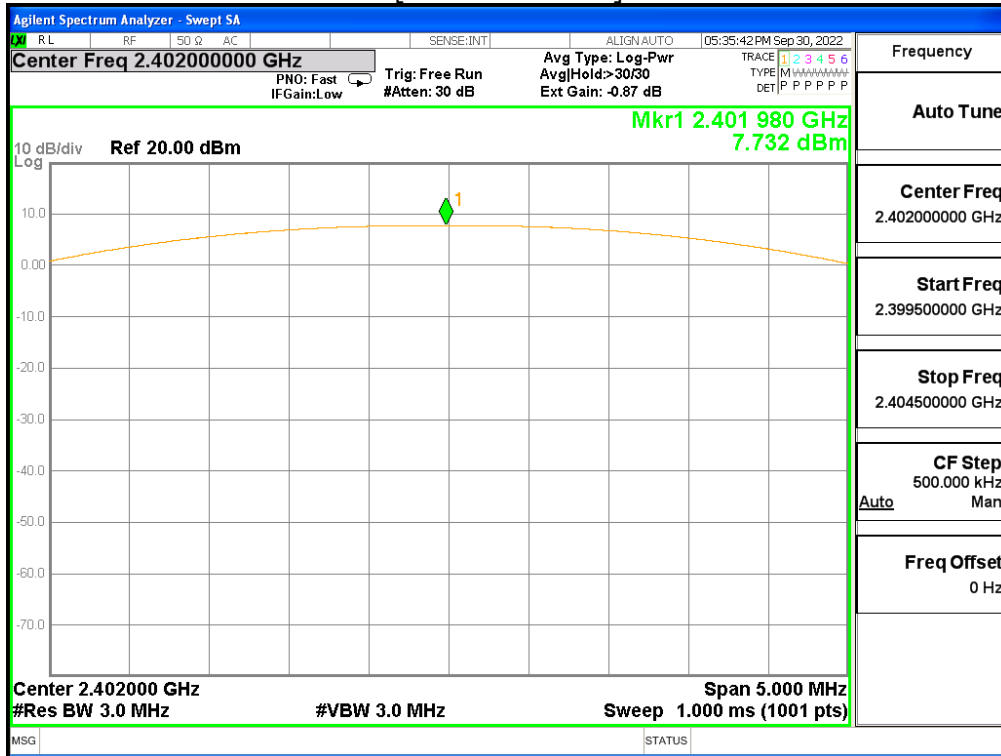

[Middle channel]

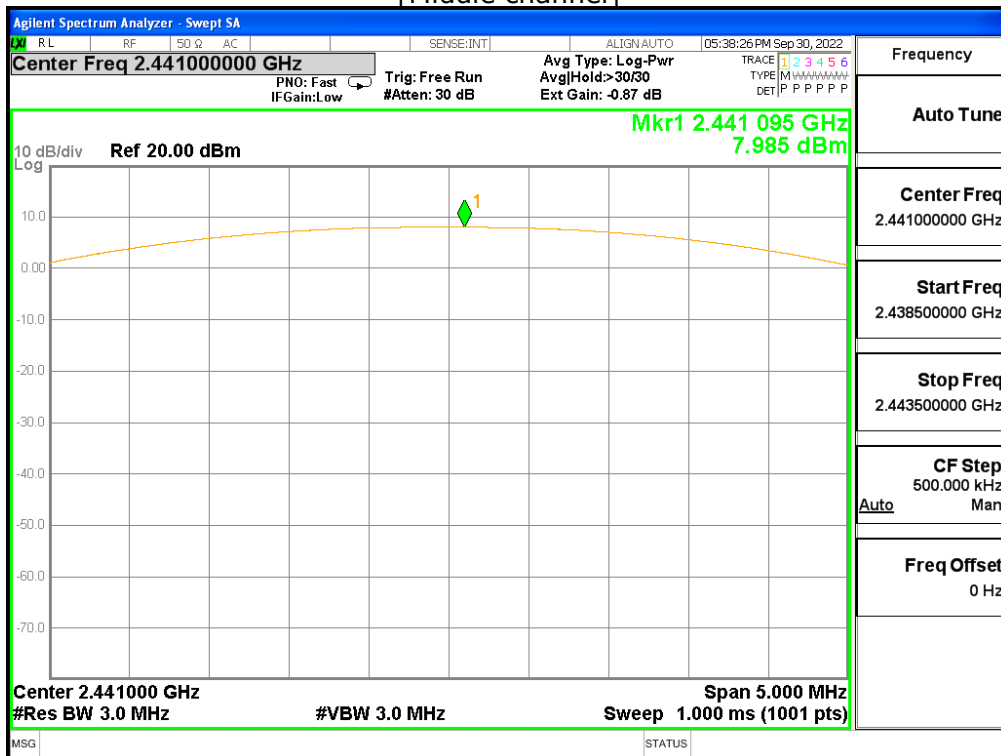




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (35) / (89) Pages

[Highest channel]

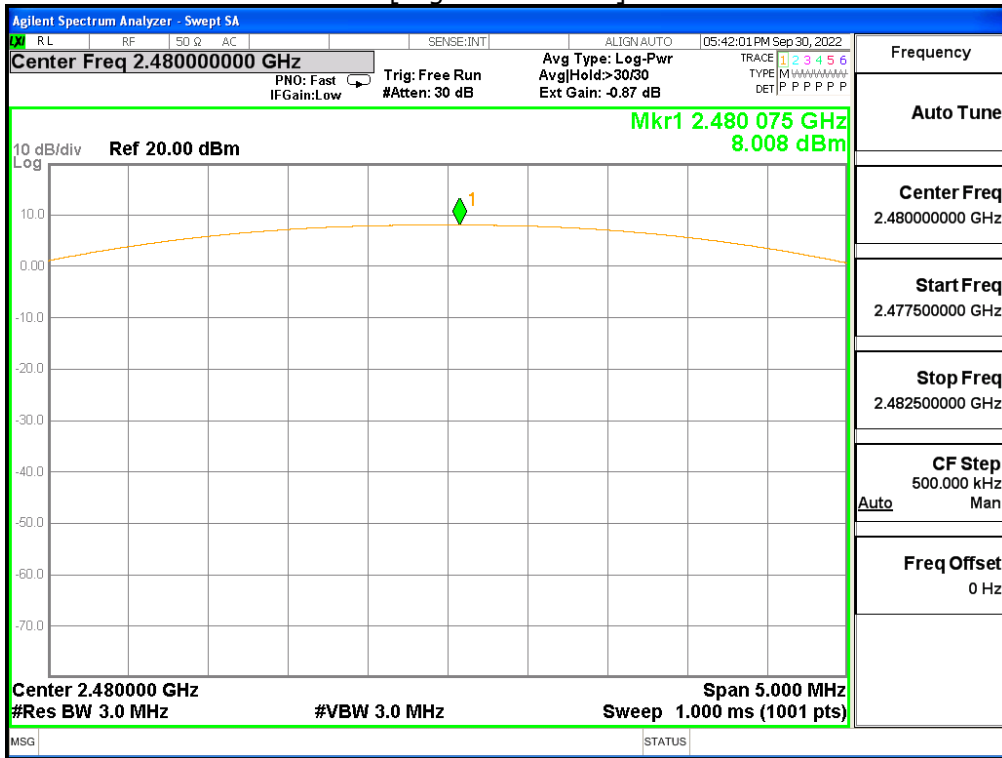




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No.:
 CTK-2022-02964
 Page (36) / (89) Pages

Test Mode : GFSK_Earbuds (R)

[Lowest channel]

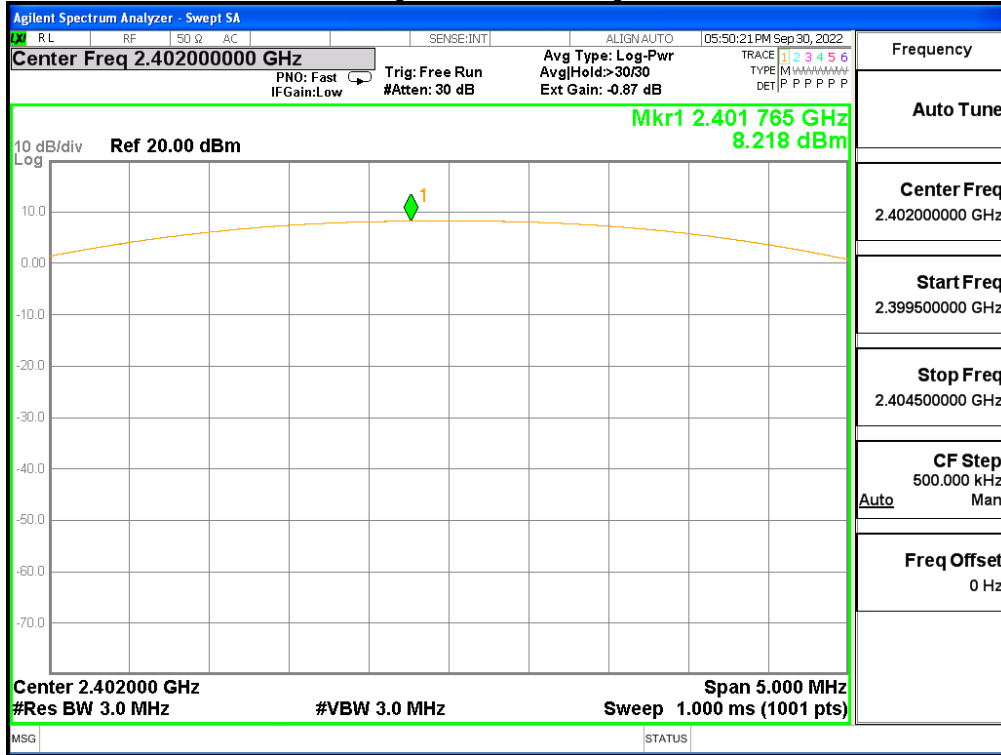

[Middle channel]

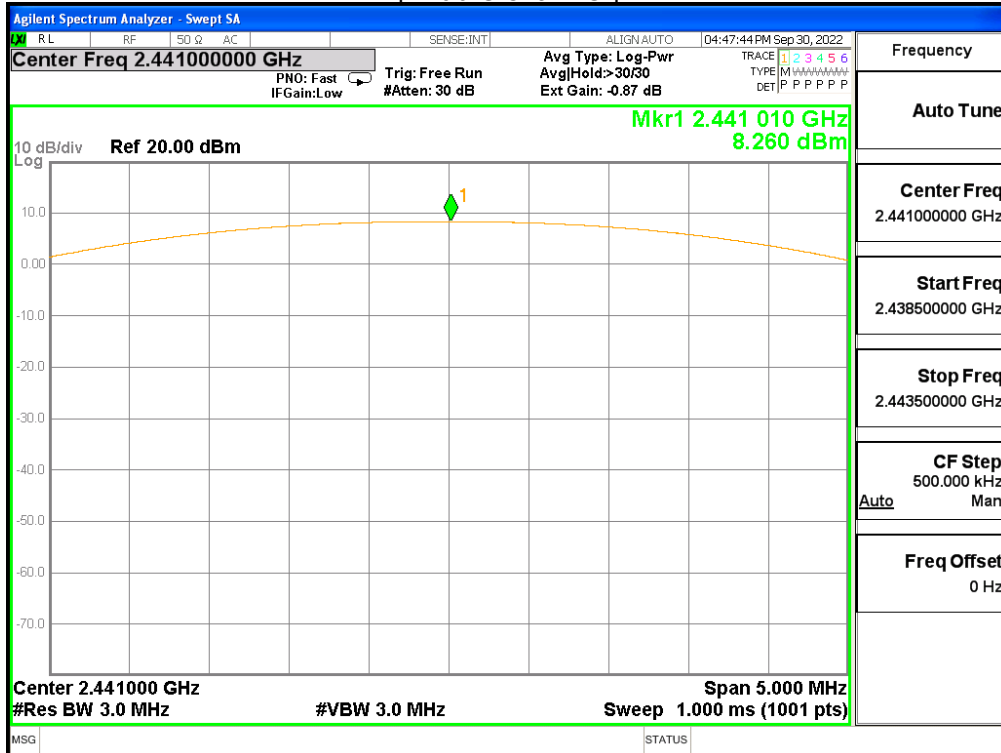




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (37) / (89) Pages

[Highest channel]

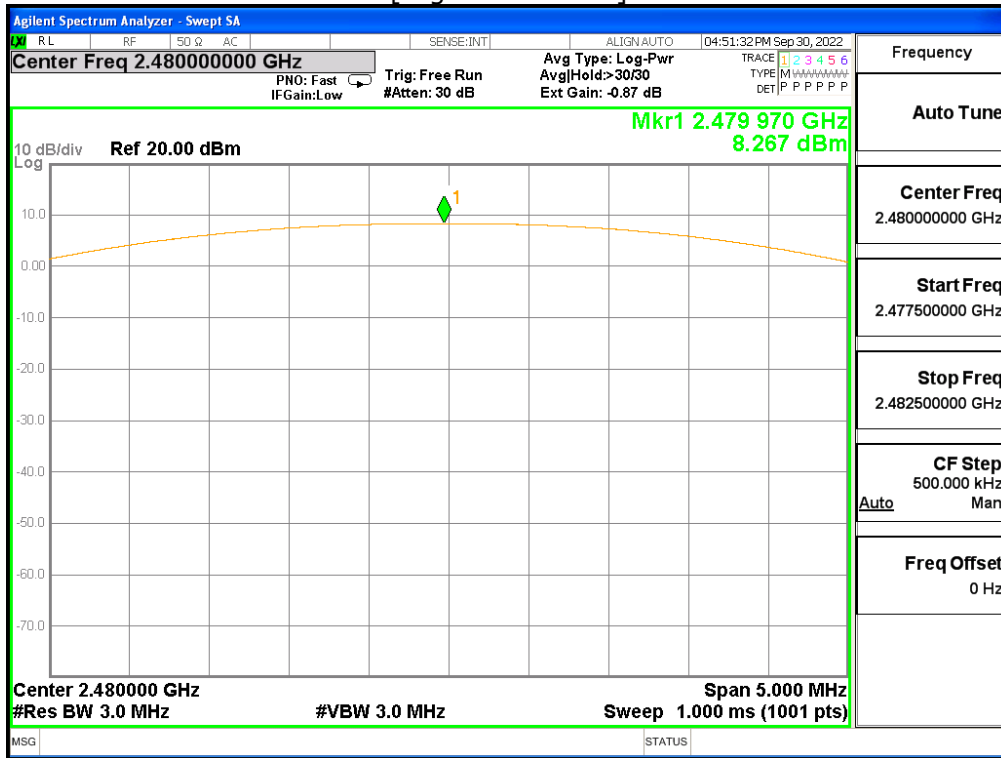




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No.:
 CTK-2022-02964
 Page (38) / (89) Pages

Test Mode : 8-DPSK_Earbuds (L)

[Lowest channel]

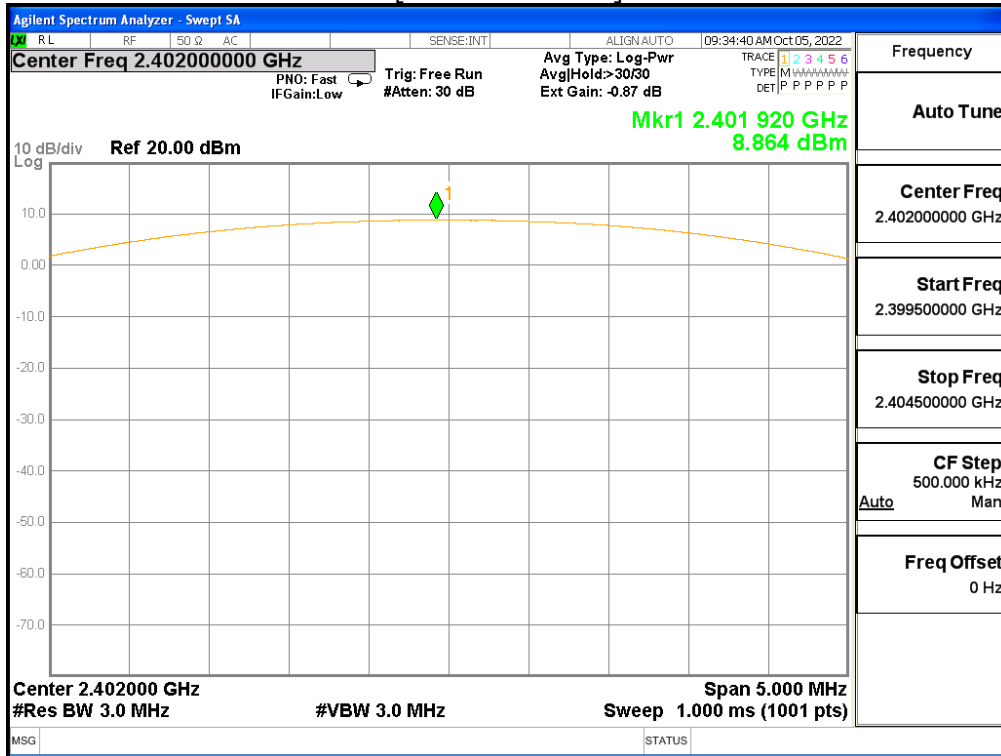

[Middle channel]

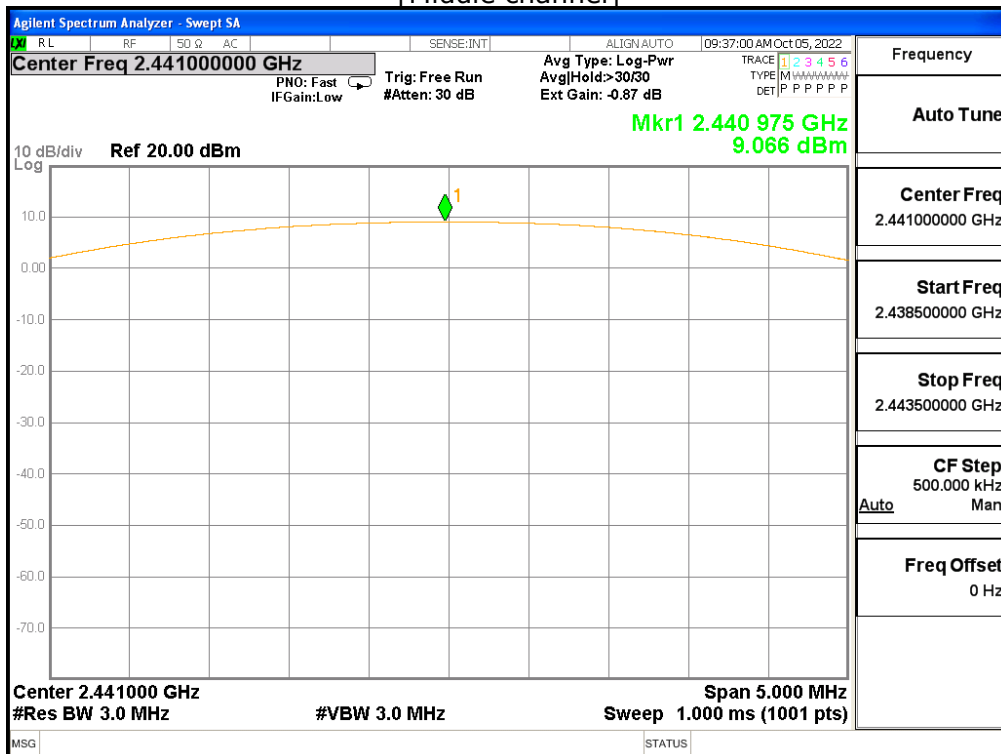




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (39) / (89) Pages

[Highest channel]

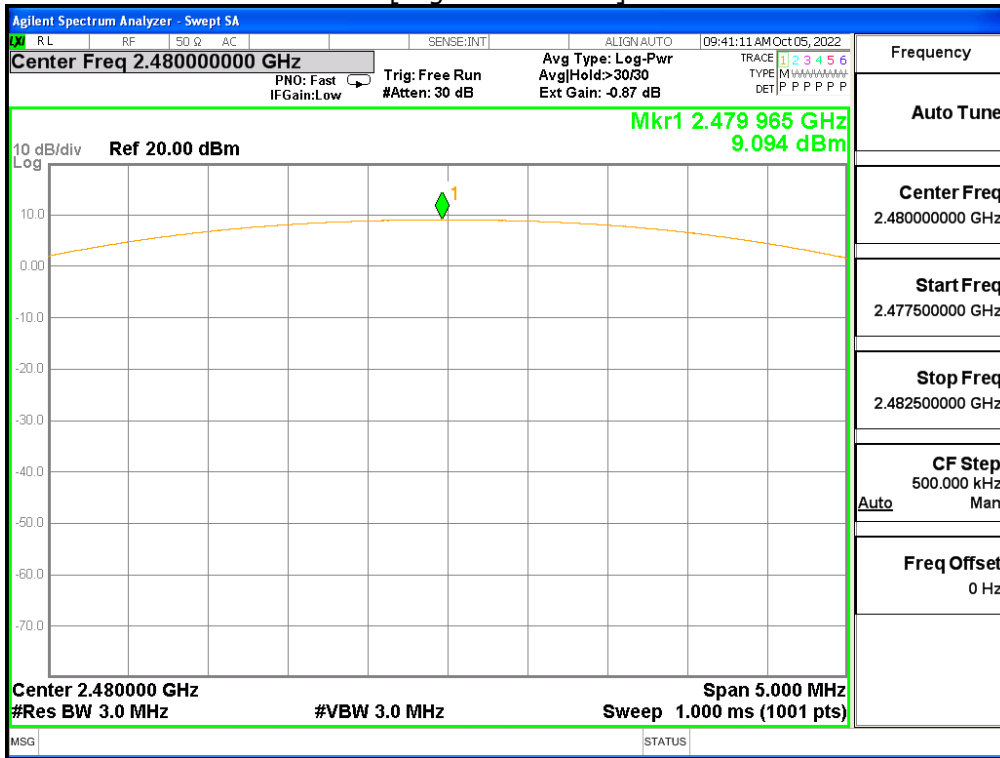




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No.:
 CTK-2022-02964
 Page (40) / (89) Pages

Test Mode : 8-DPSK_Earbuds (R)

[Lowest channel]

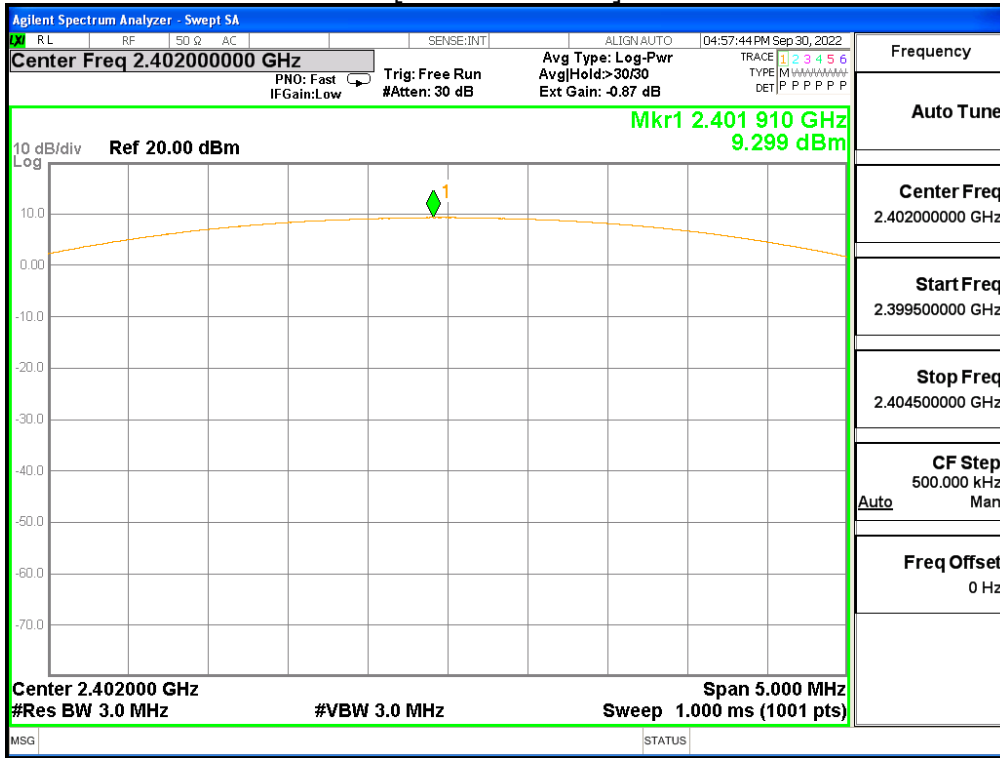

[Middle channel]

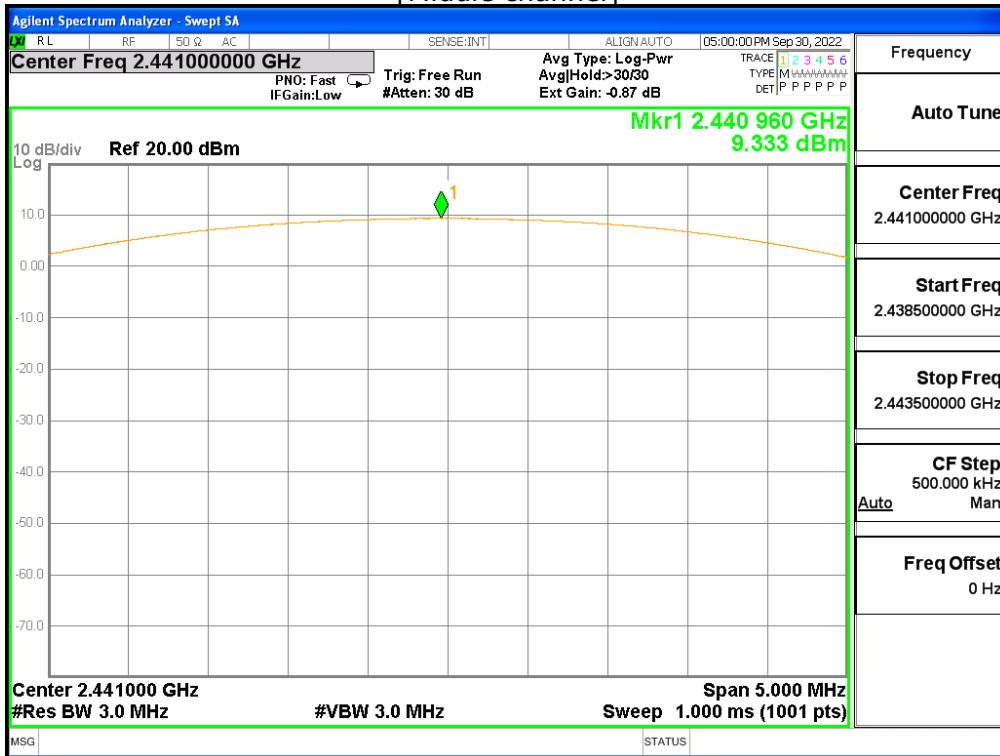




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (41) / (89) Pages

[Highest channel]

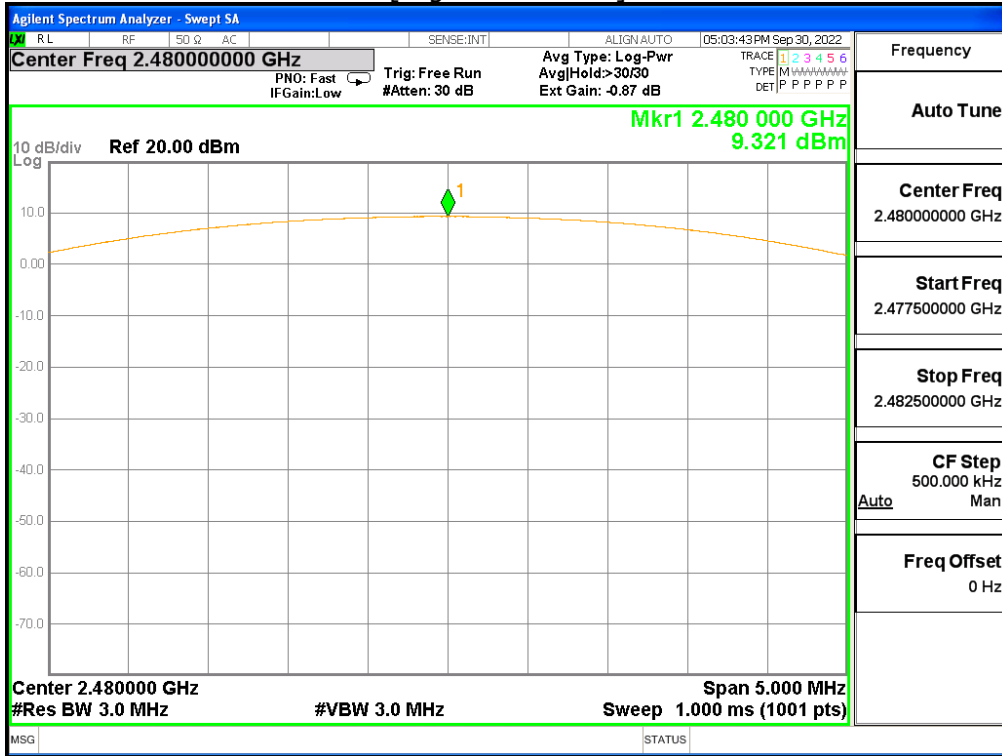

4.6 Unwanted Emissions (Conducted)

Test Procedures

ANSI C63.10-2013 - Section 7.8.6, 7.8.8


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

- | | |
|---------------------|--------------------------------|
| a) RBW = 100 kHz | b) VBW = 300 kHz (\geq RBW) |
| c) Span = 10 MHz | d) Detector = peak |
| e) Trace = max hold | f) Sweep = auto |

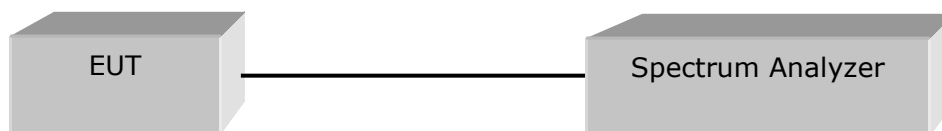

Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the in-band spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (43) / (89) Pages

Band Edge

Test Mode : Hopping mode, GFSK_Earbuds (L)

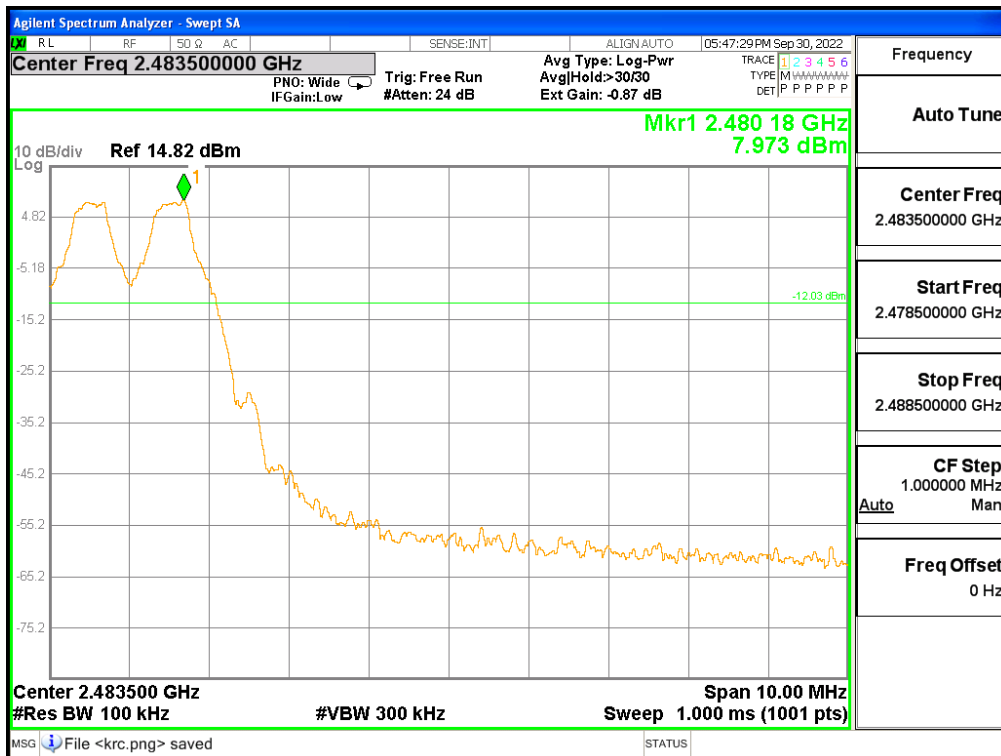
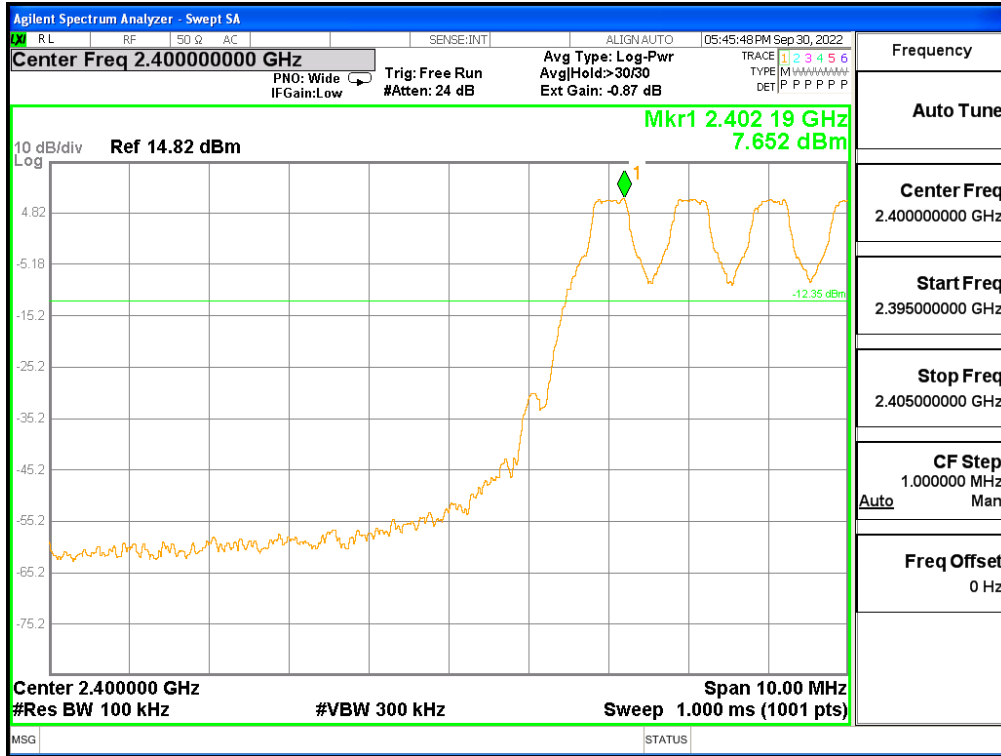






CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (44) / (89) Pages

Test Mode : Hopping mode, GFSK_Earbuds (R)

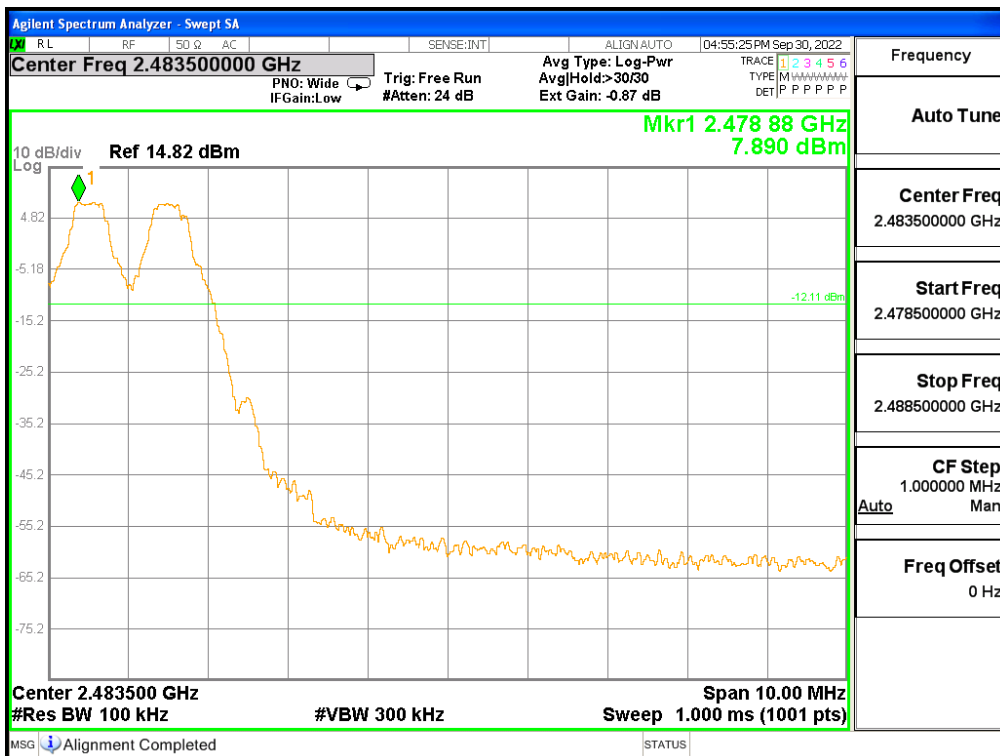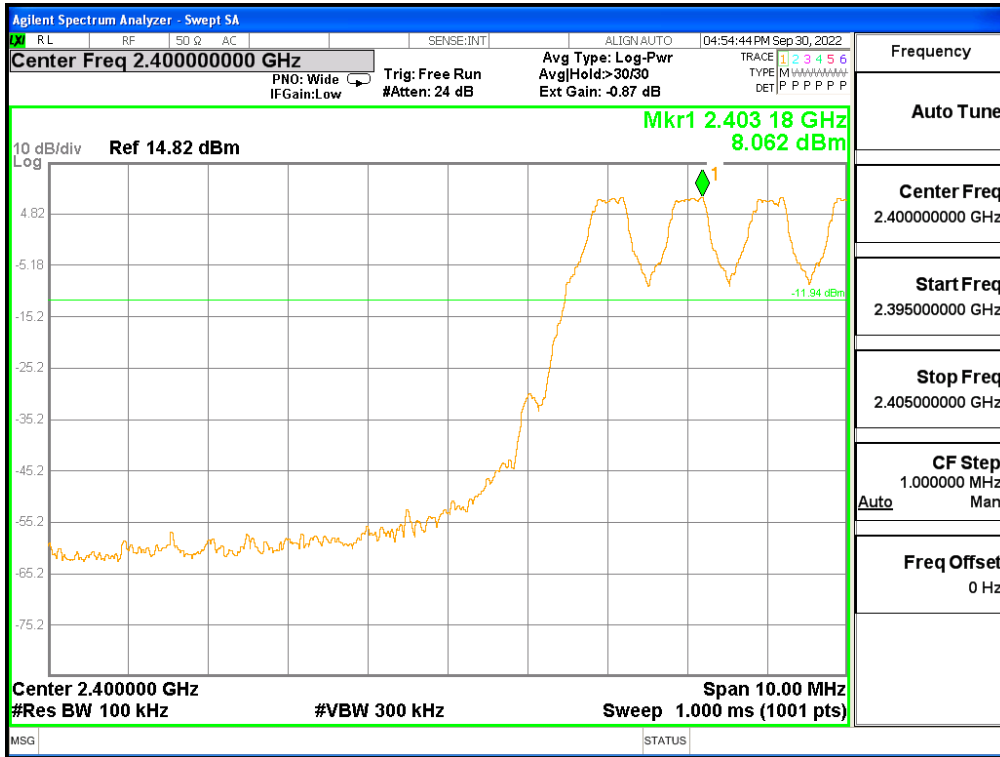

Test Mode : Hopping mode, 8-DPSK_Earbuds (L)

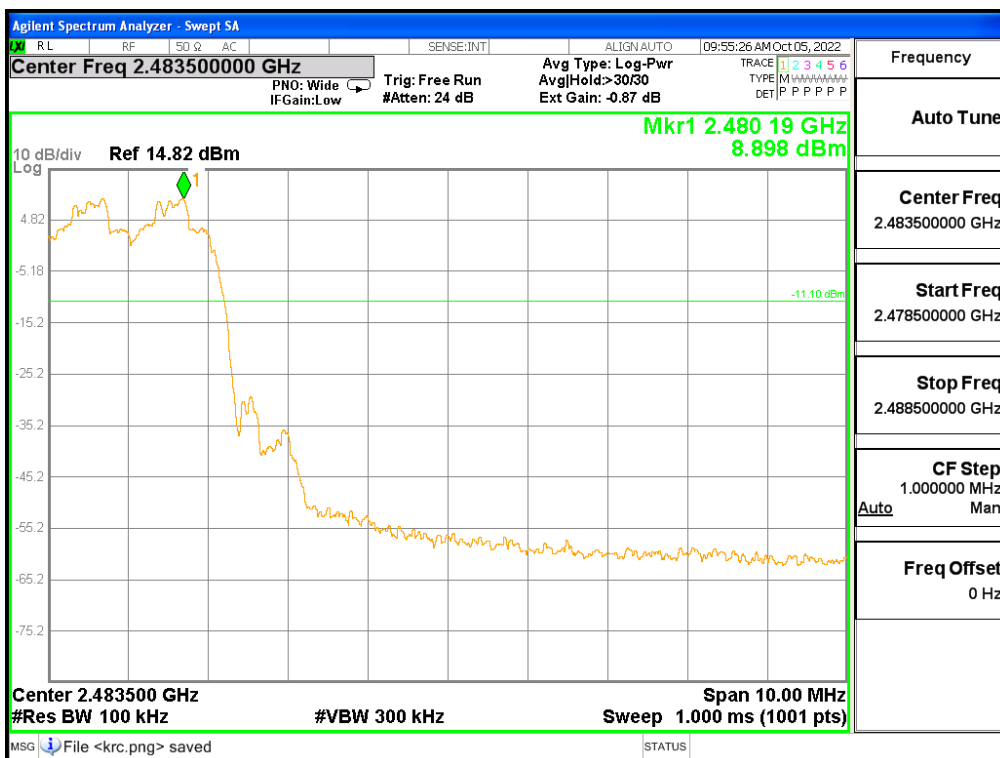
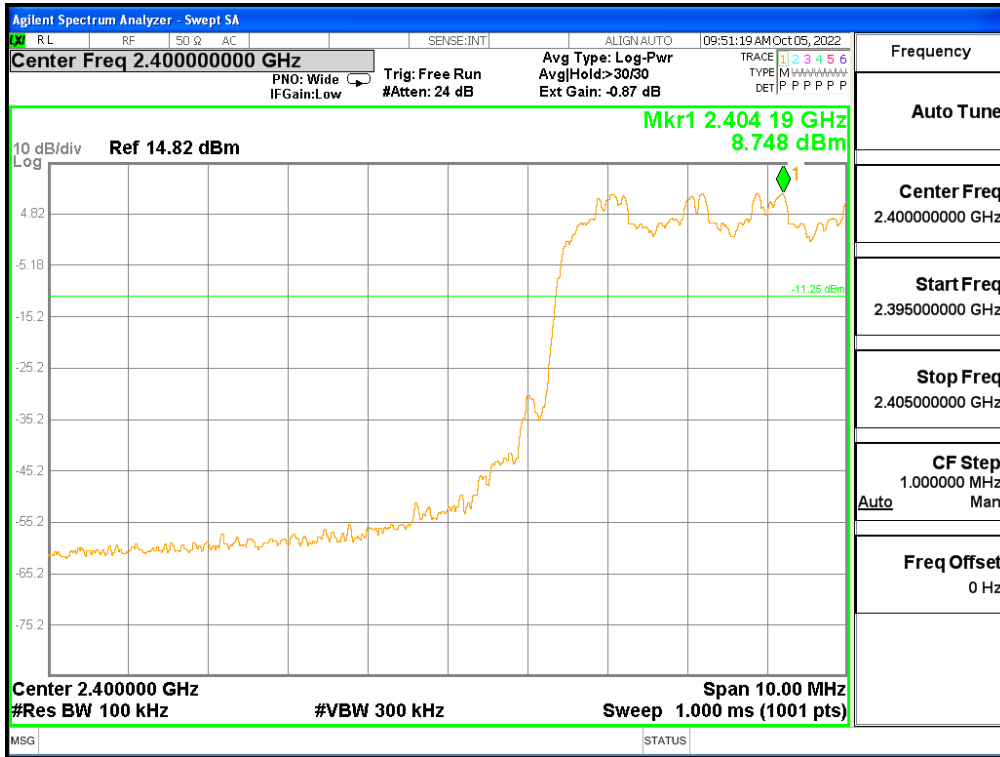




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (46) / (89) Pages

Test Mode : Hopping mode, 8-DPSK_Earbuds (R)

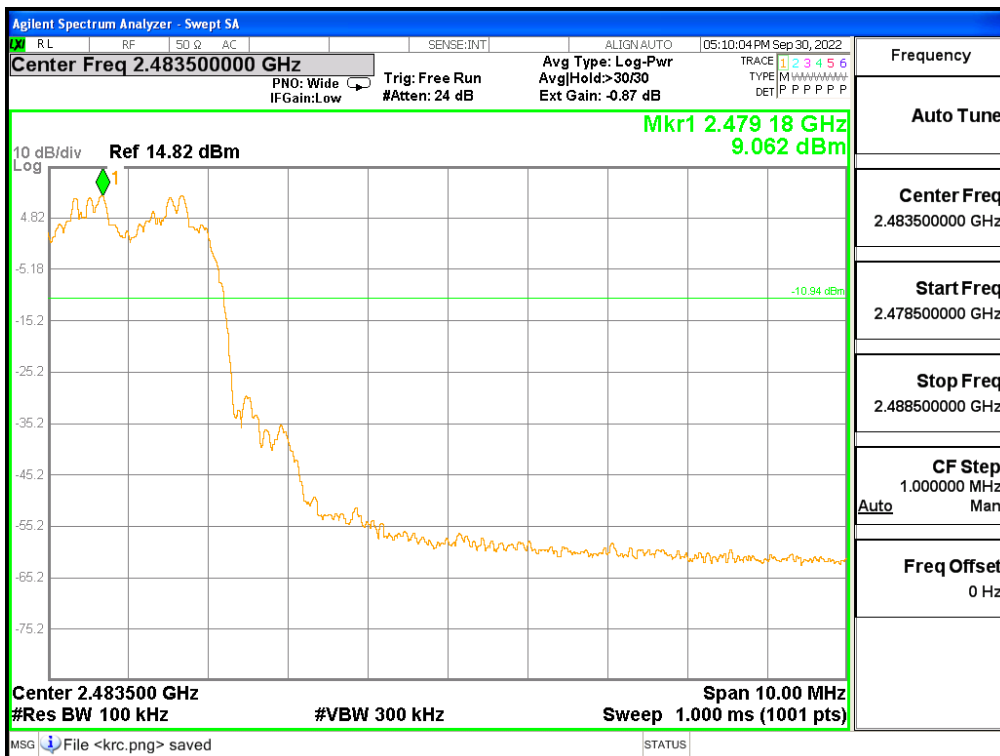
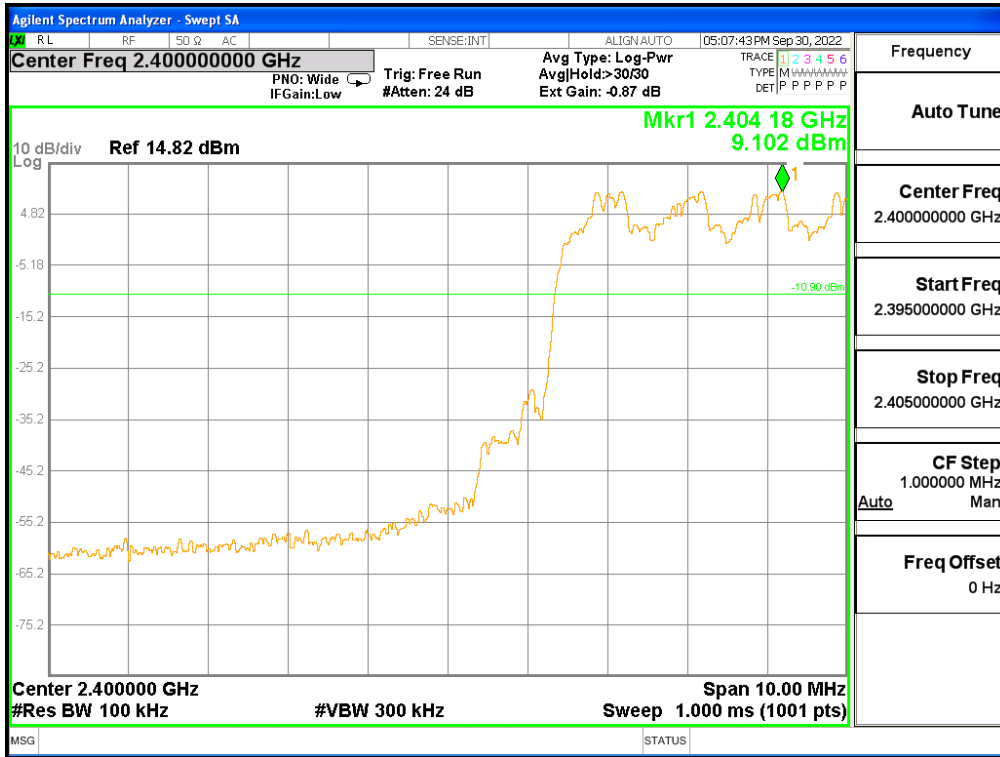




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (47) / (89) Pages

Test Mode : Non-Hopping mode, GFSK_Earbuds (L)

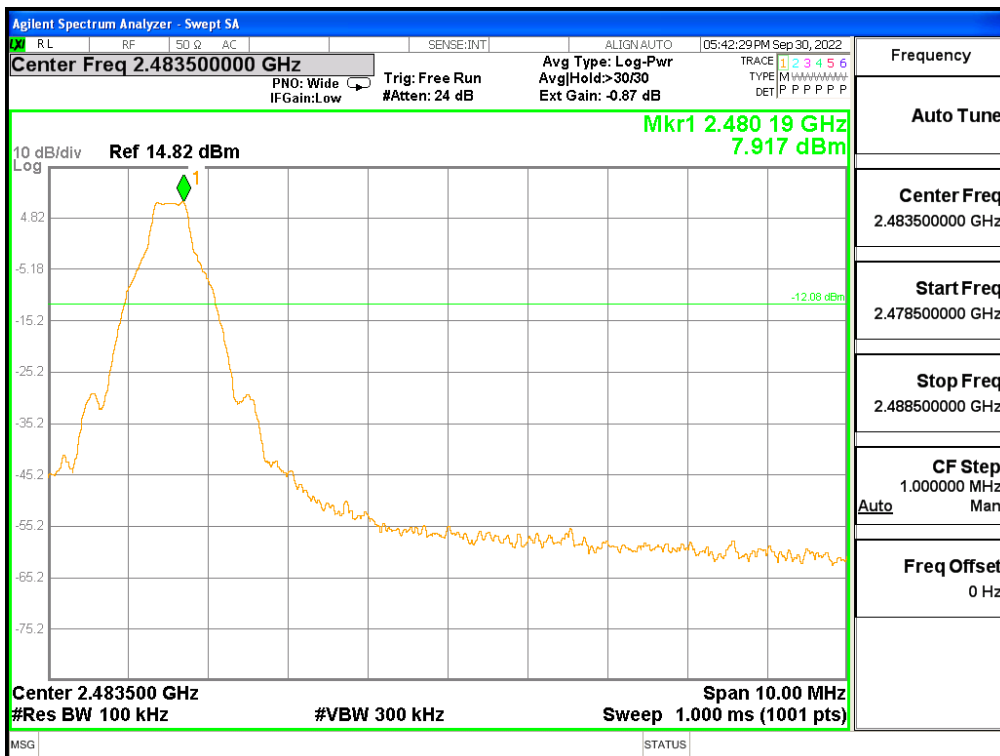
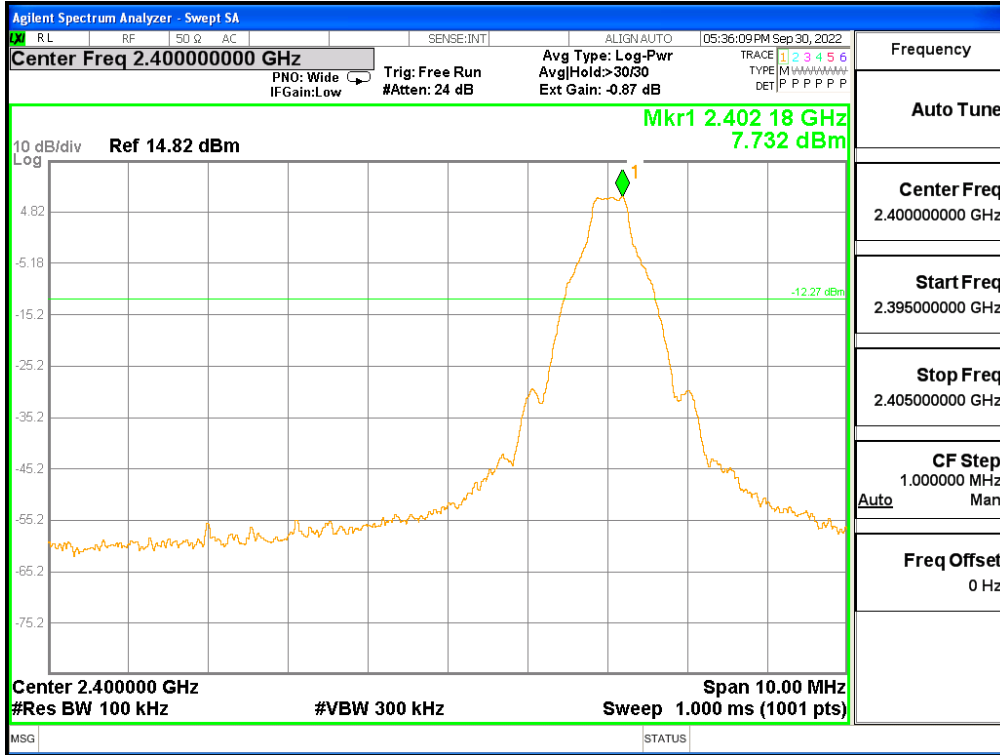




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (48) / (89) Pages

Test Mode : Non-Hopping mode, GFSK_Earbuds (R)

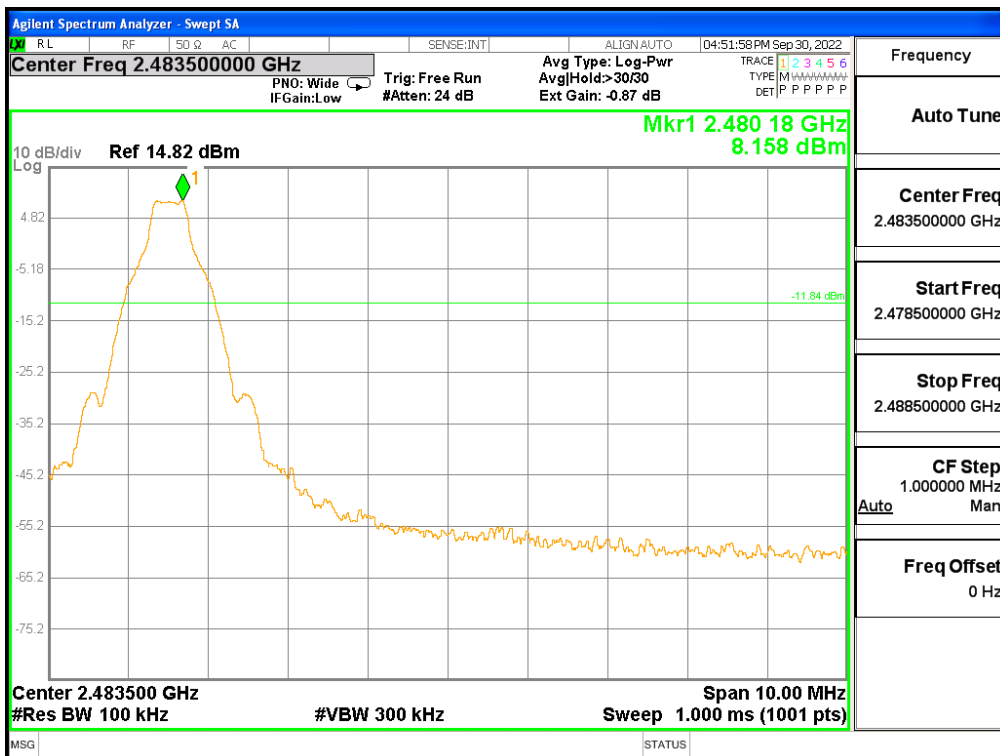
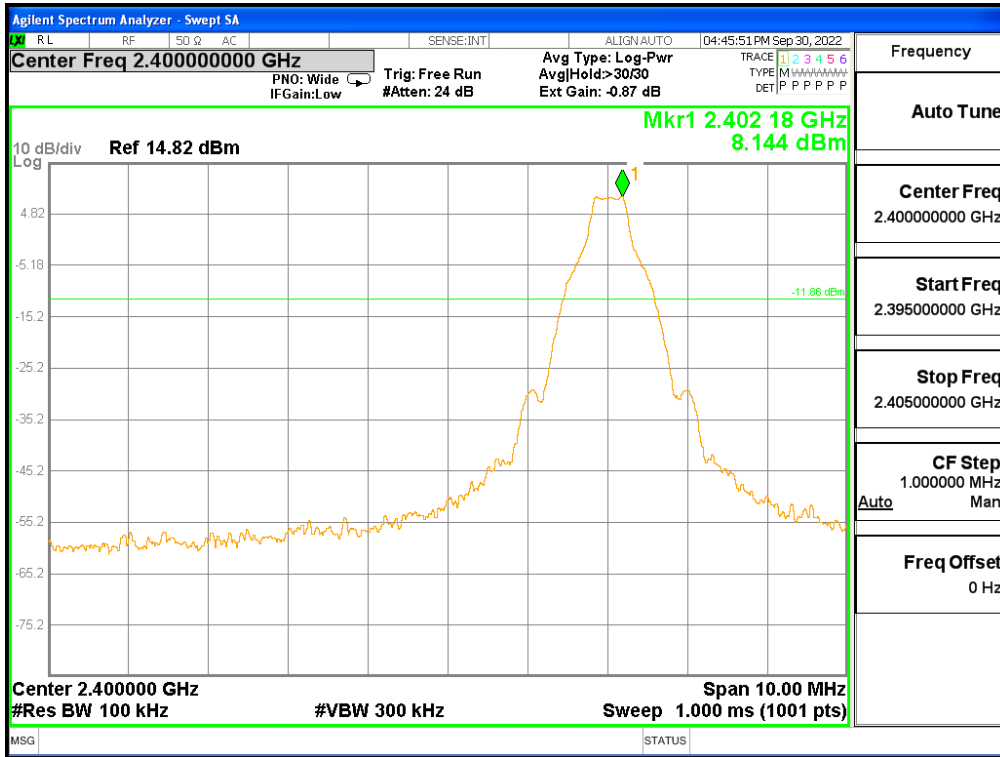




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (49) / (89) Pages

Test Mode : Non-Hopping mode, 8-DPSK_Earbuds (L)

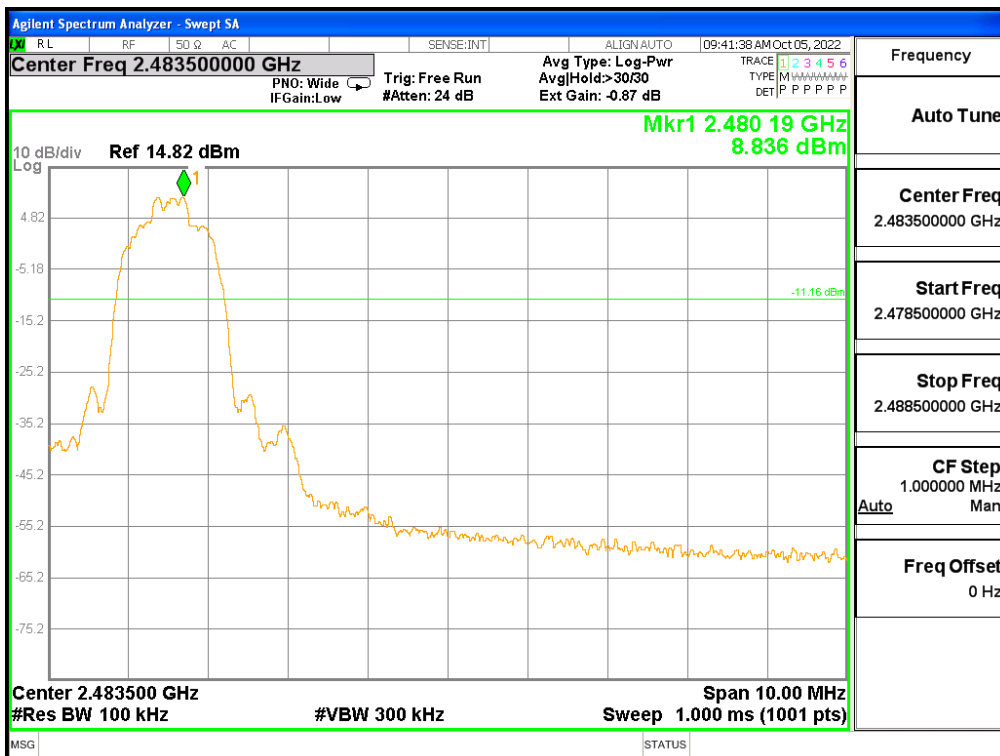
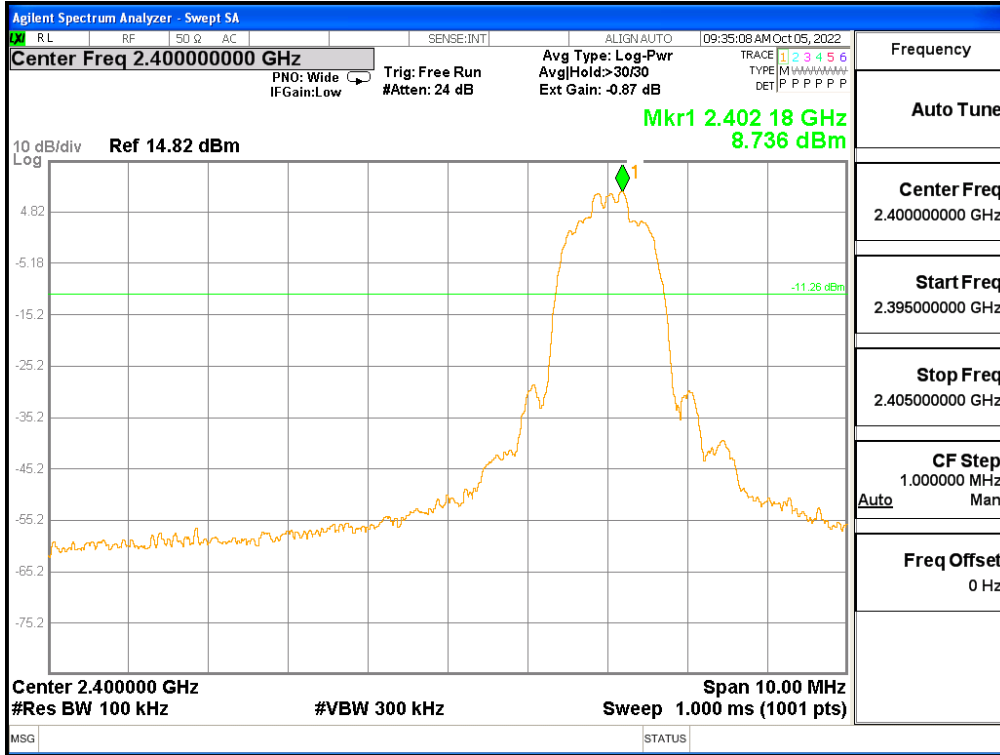




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (50) / (89) Pages

Test Mode : Non-Hopping mode, 8-DPSK_Earbuds (R)

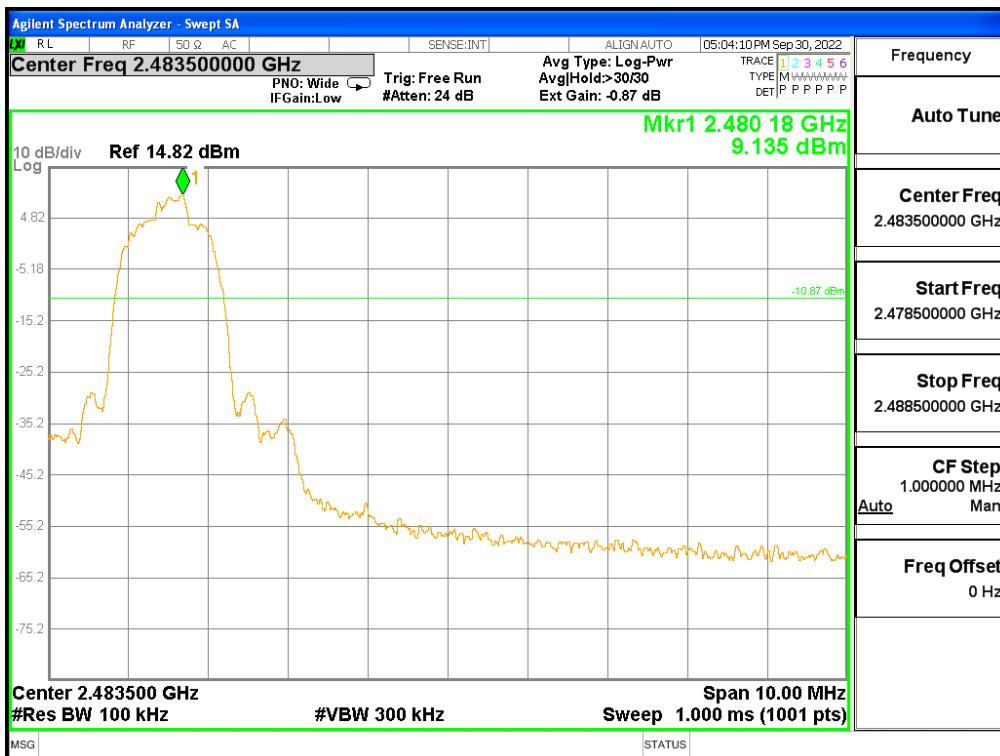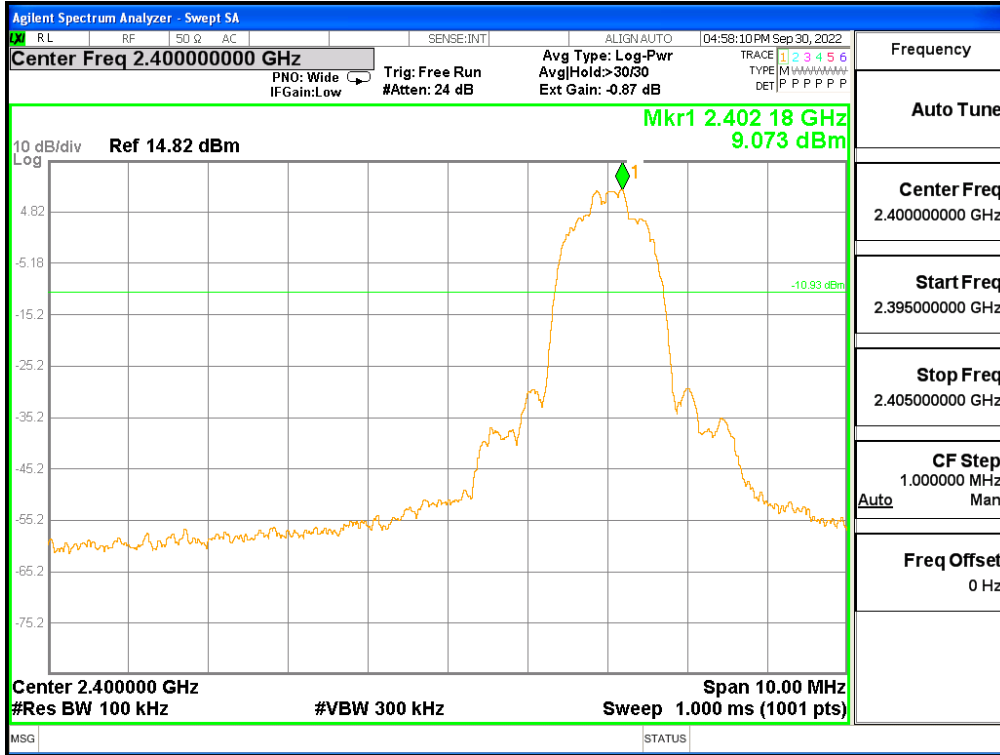





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (51) / (89) Pages

Spurious Emission

Test Mode : GFSK_Earbuds (L)

[Lowest channel]

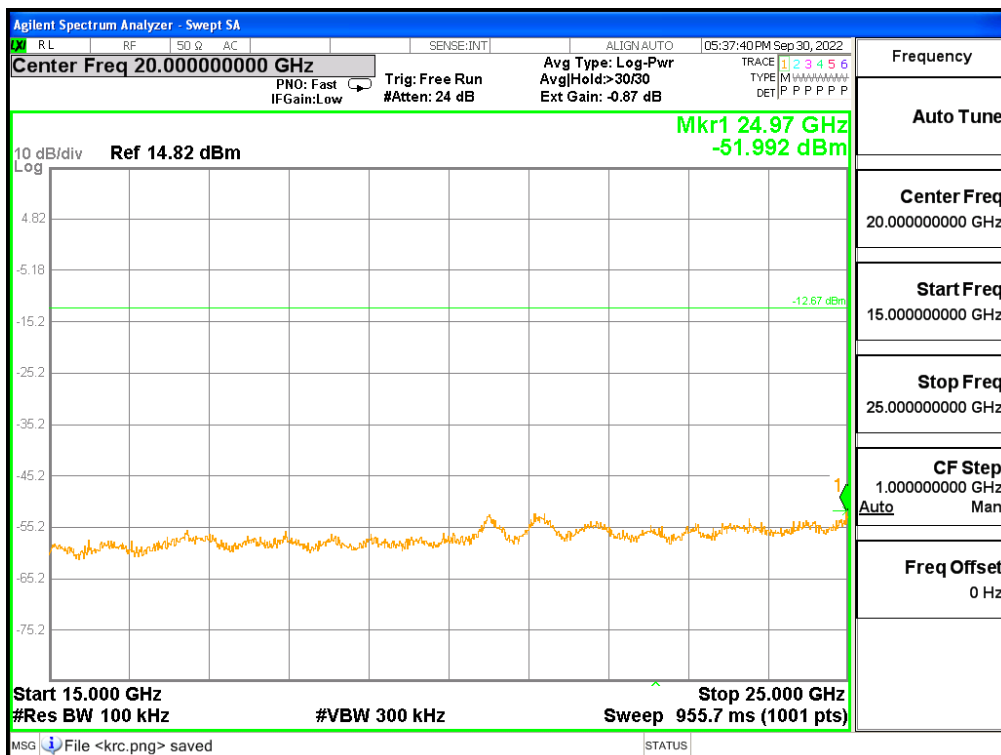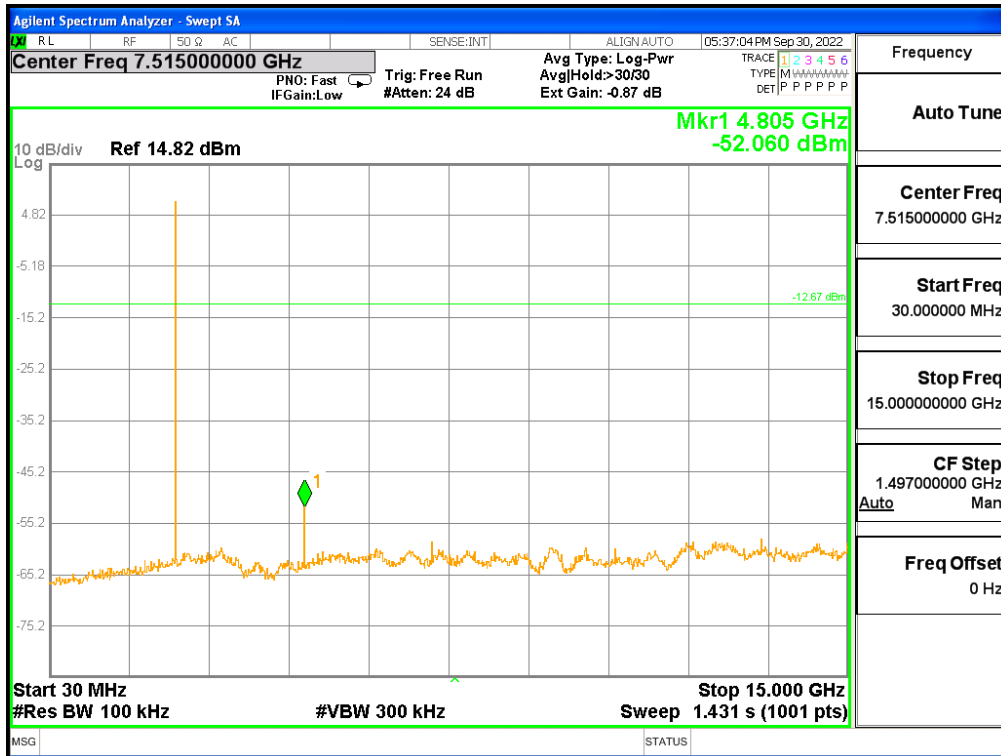




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (52) / (89) Pages

[Middle Channel]


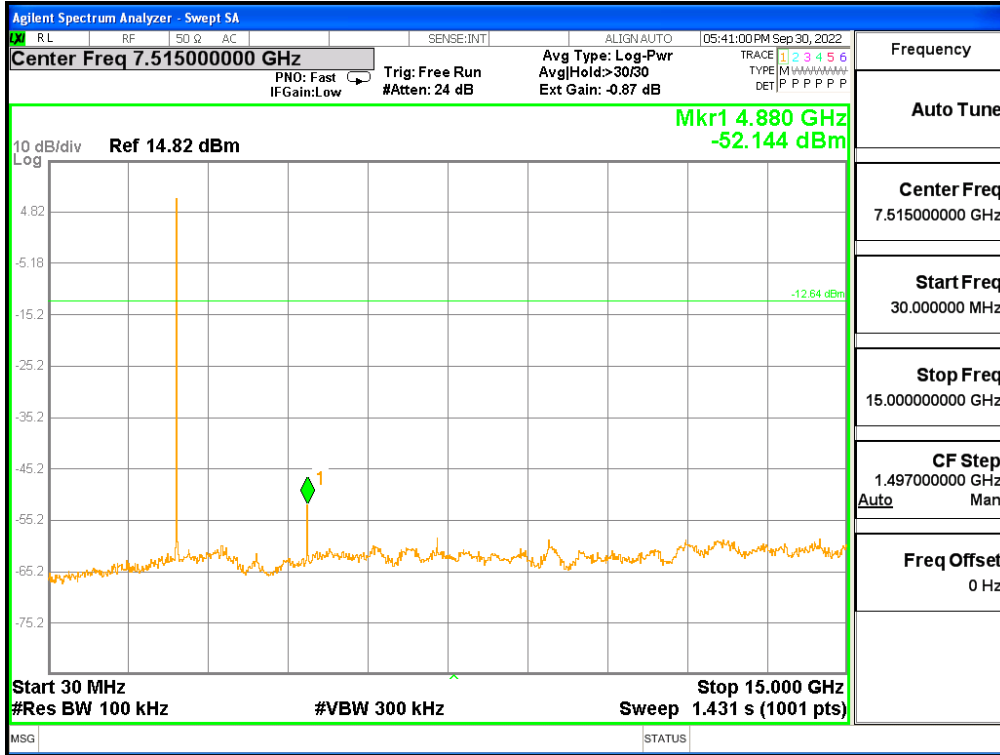




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (53) / (89) Pages

[Highest Channel]

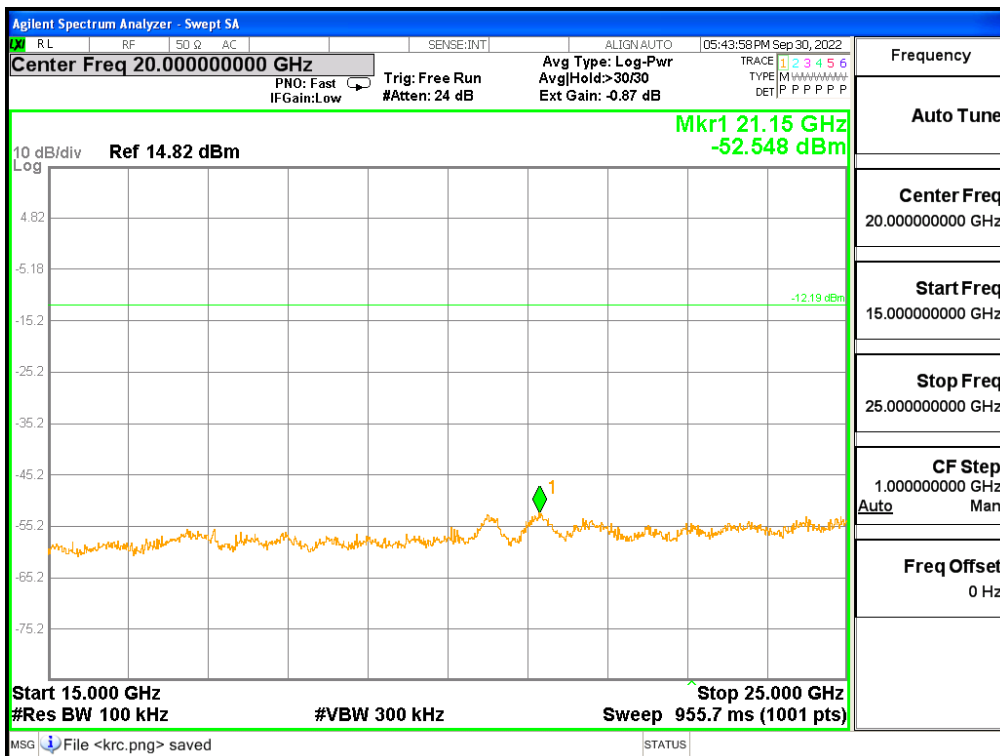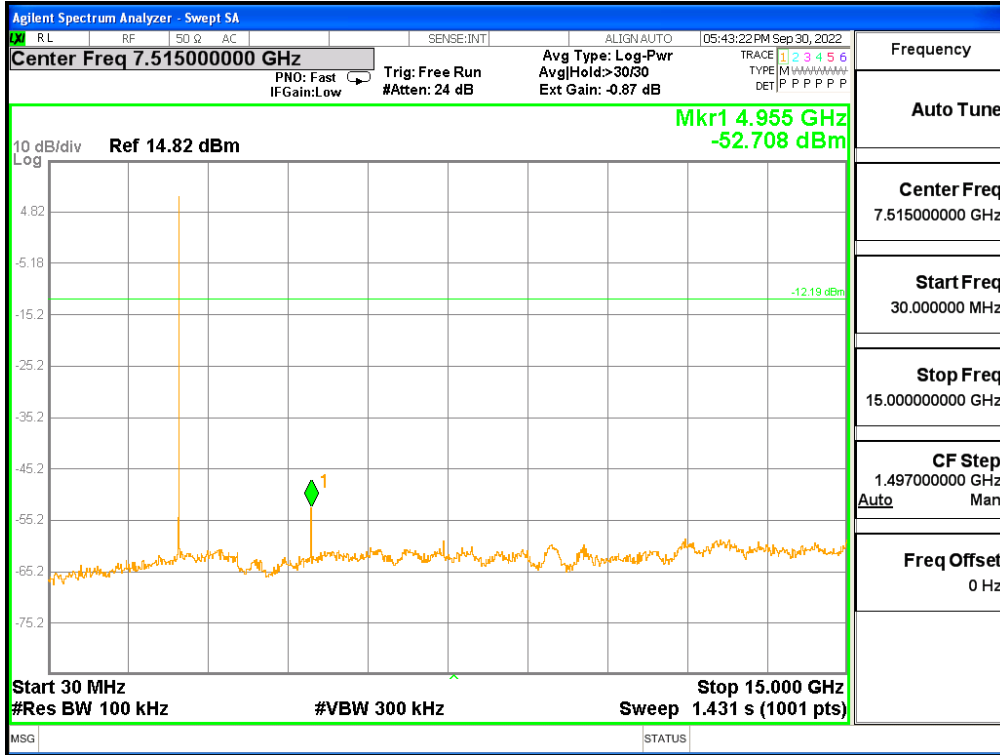





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (54) / (89) Pages

Test Mode : GFSK_Earbuds (R)

[Lowest channel]

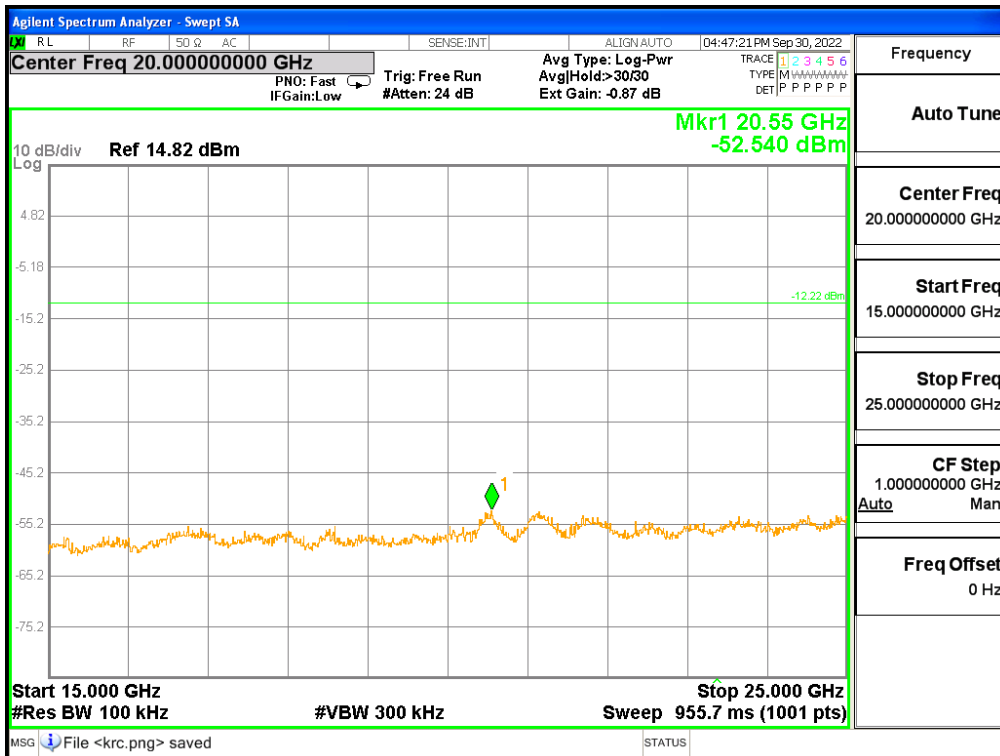
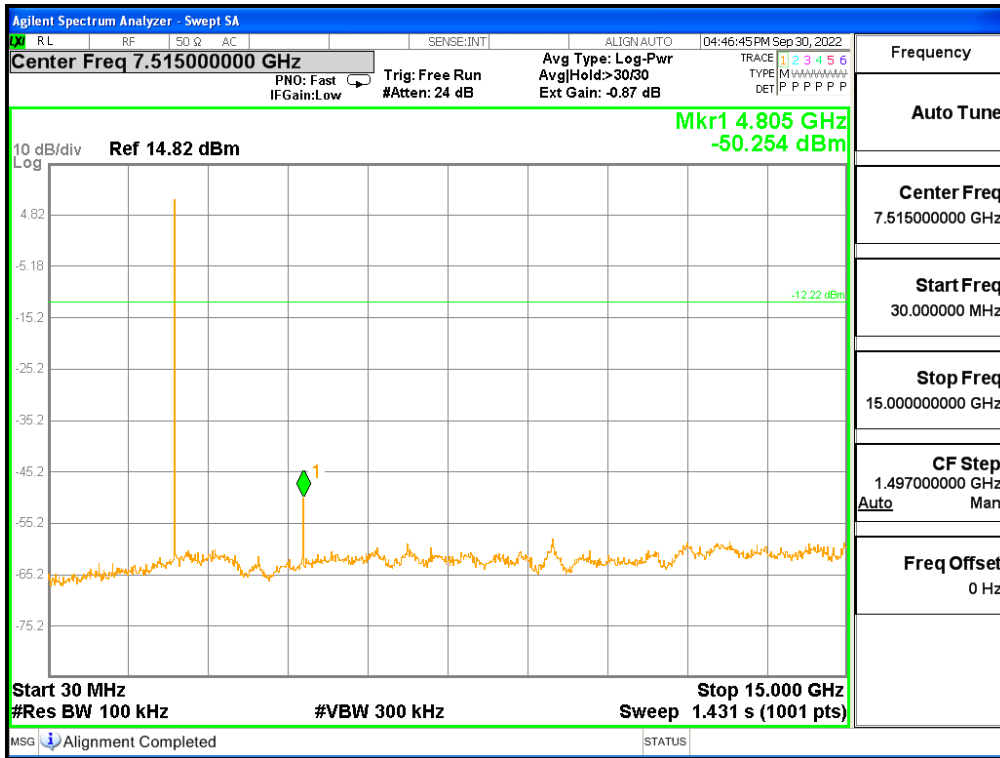




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (55) / (89) Pages

[Middle Channel]

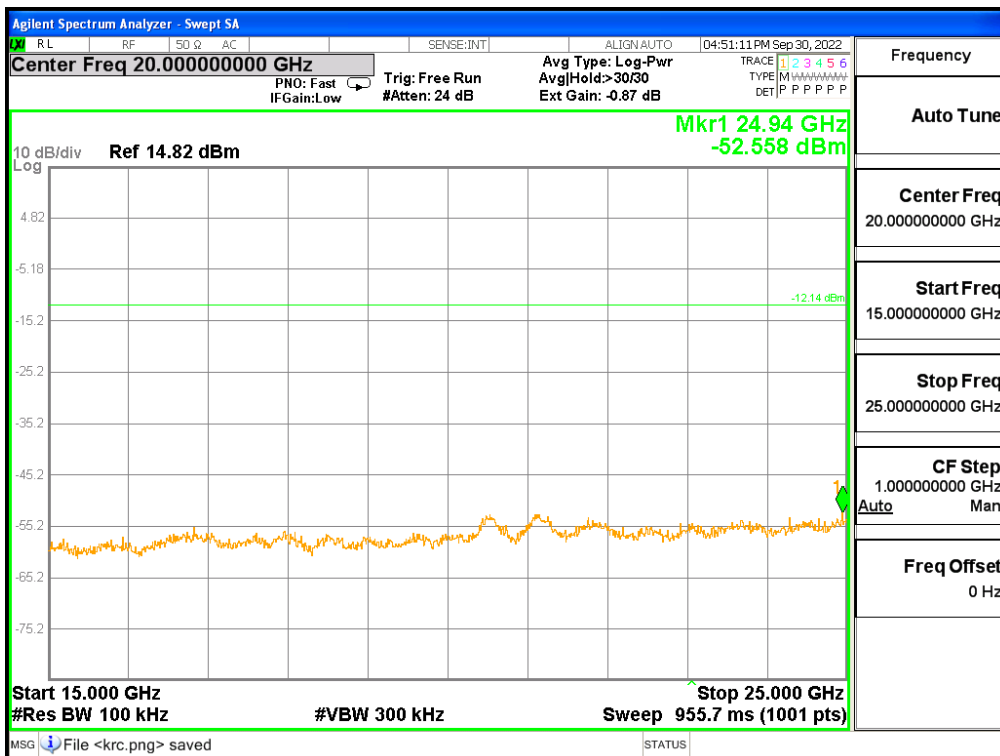
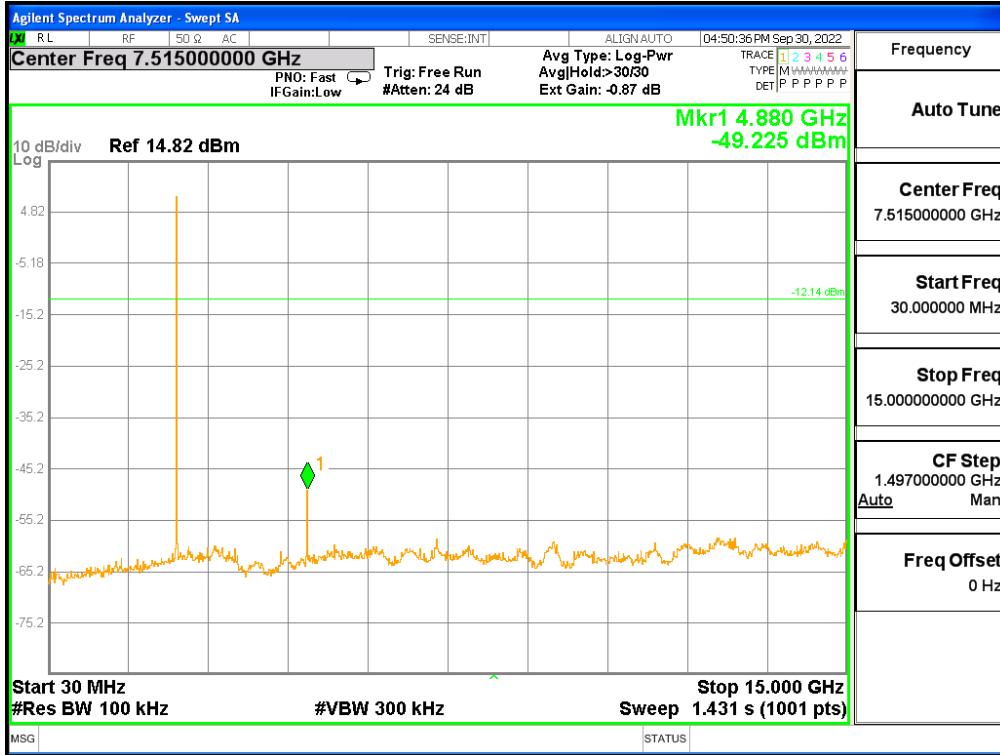




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (56) / (89) Pages

[Highest Channel]

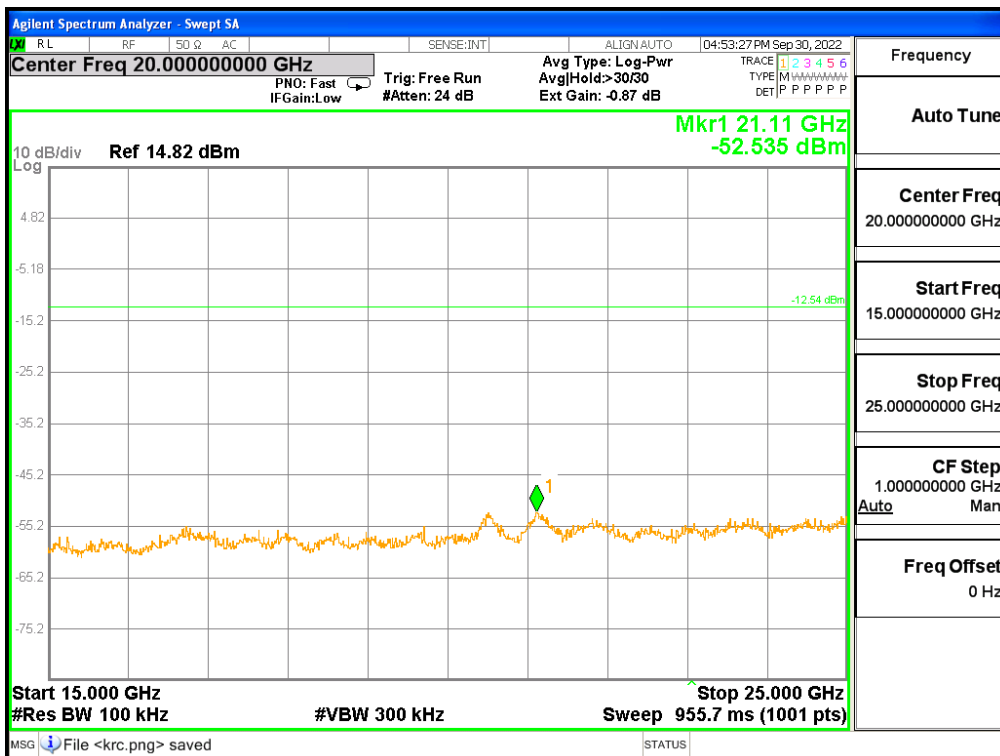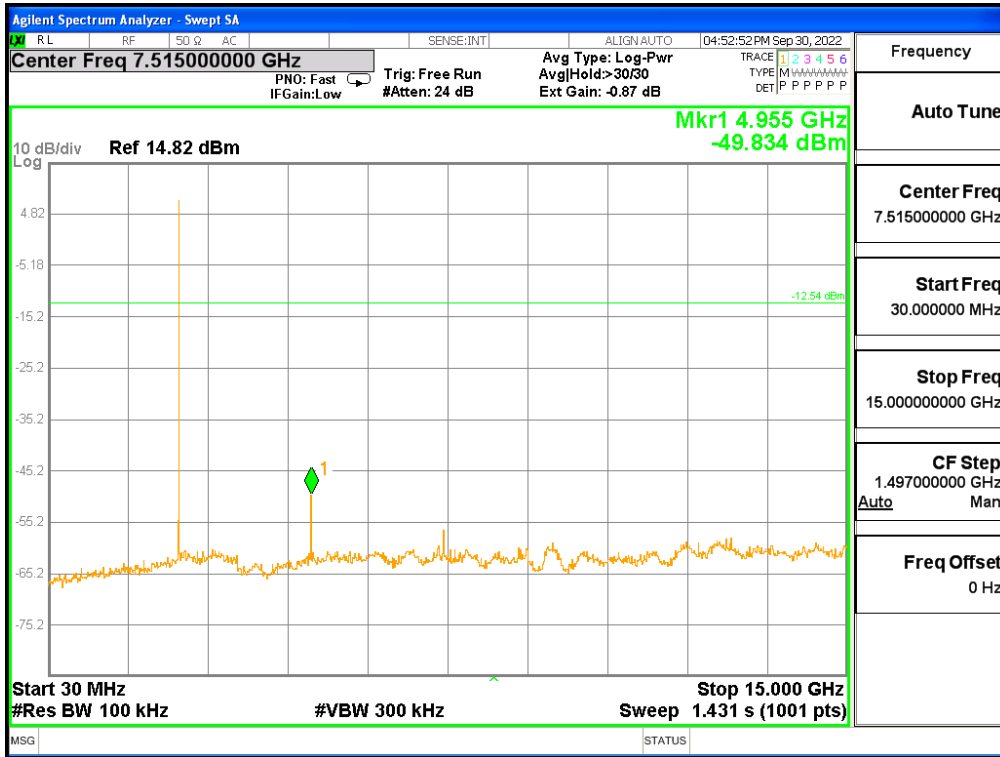





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (57) / (89) Pages

Test Mode : 8-DPSK_Earbuds (L)

[Lowest channel]

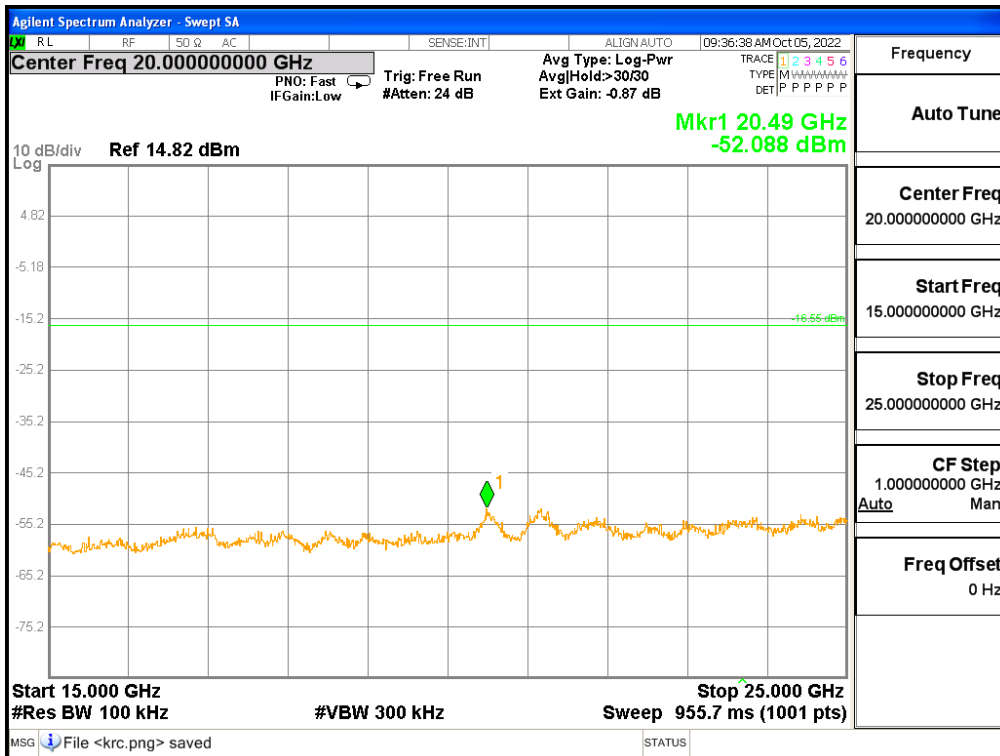
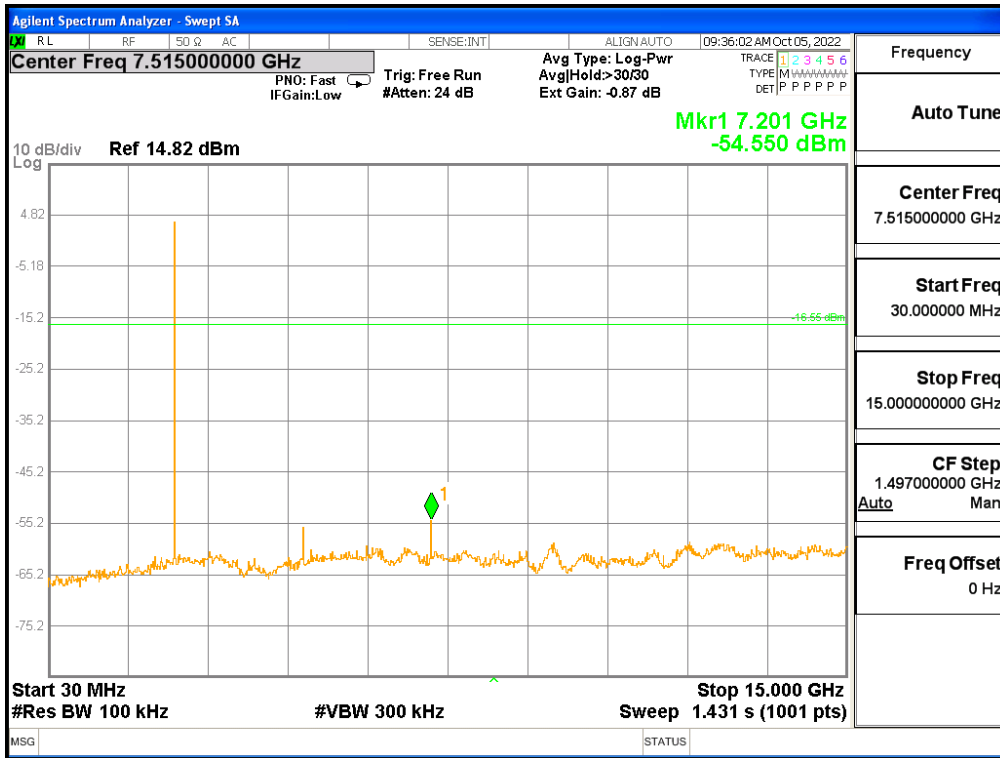




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (58) / (89) Pages

[Middle Channel]

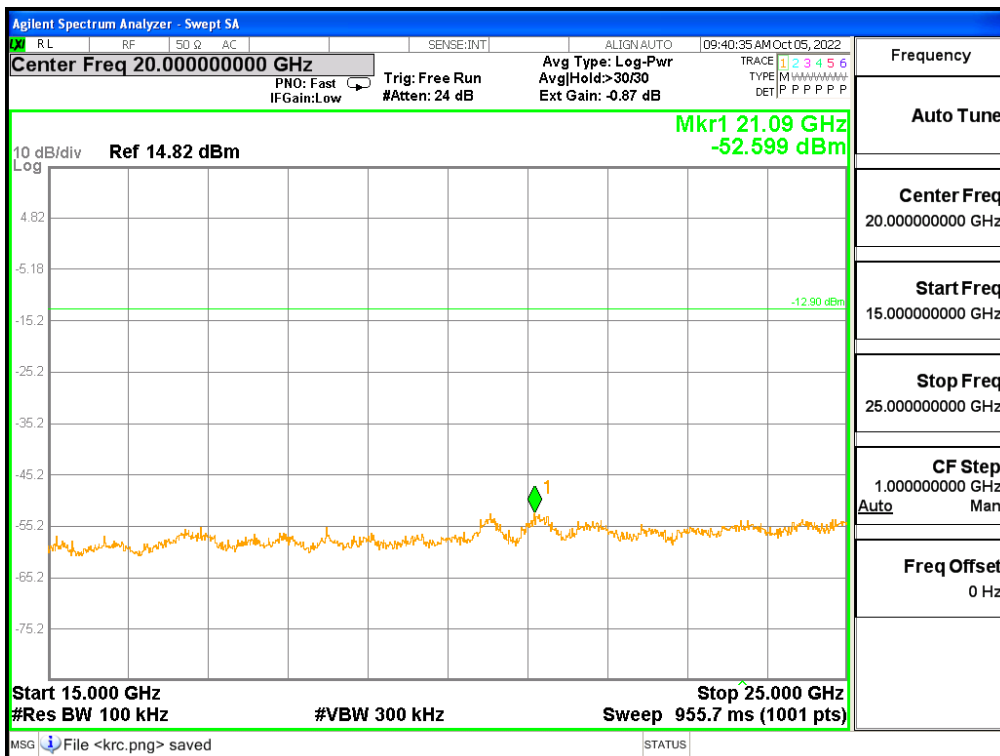
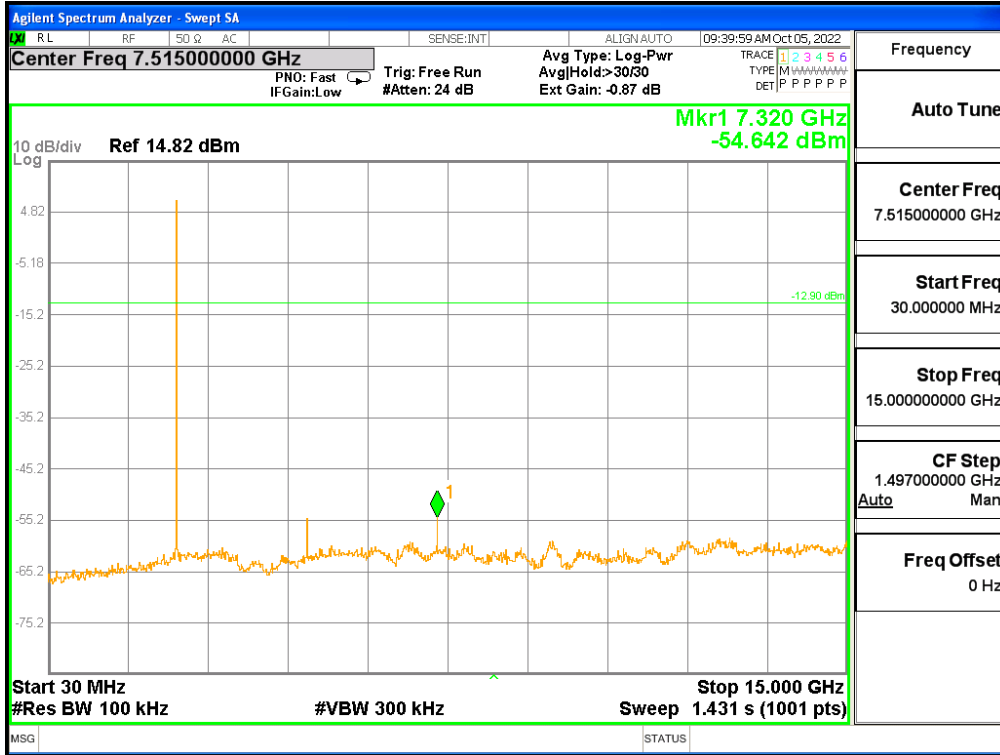




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (59) / (89) Pages

[Highest Channel]

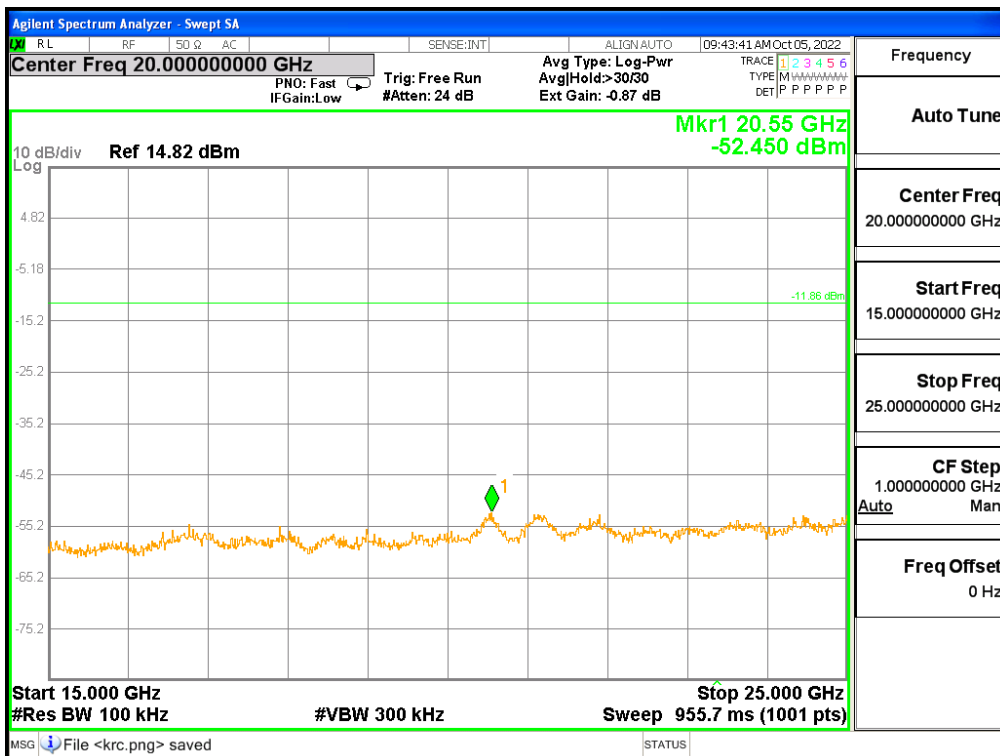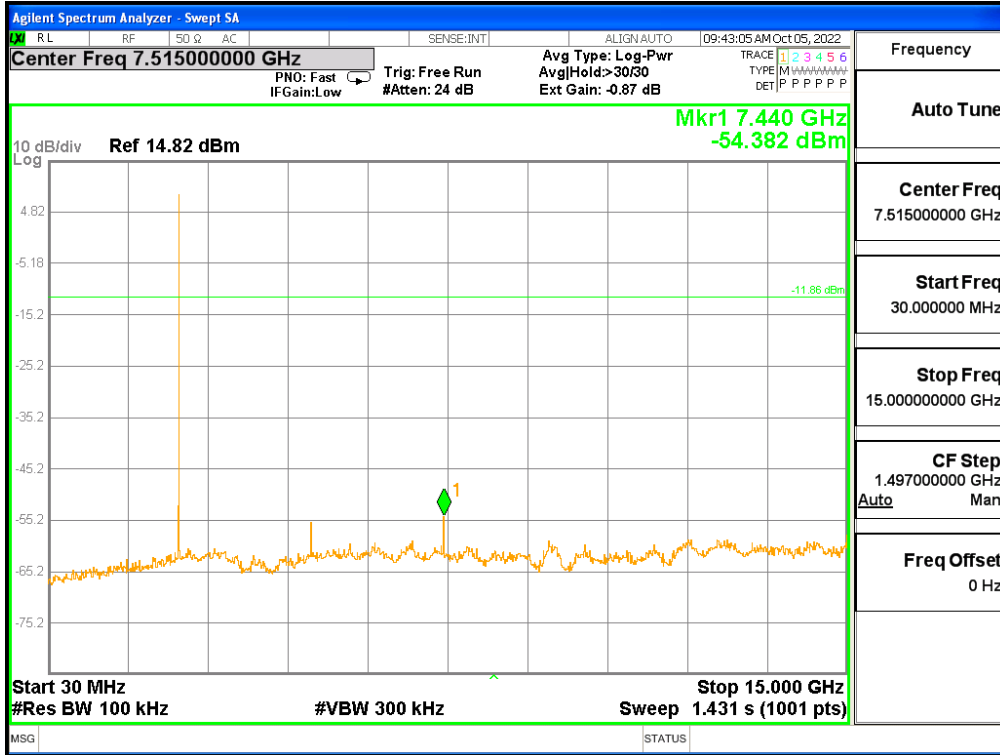





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (60) / (89) Pages

Test Mode : 8-DPSK_Earbuds (R)

[Lowest channel]

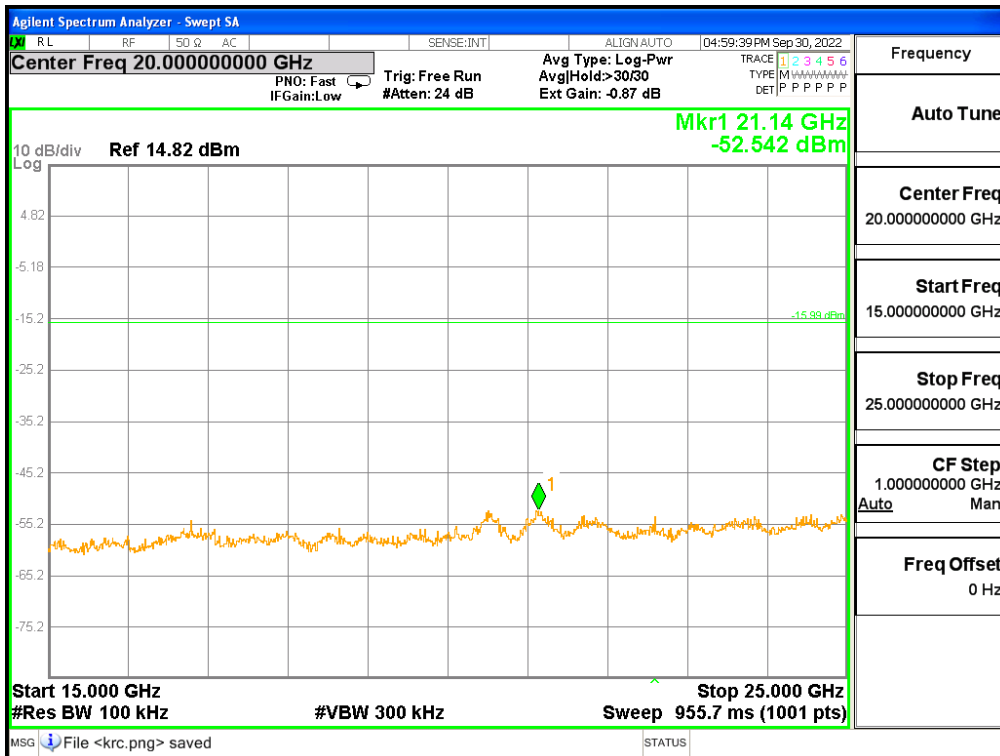
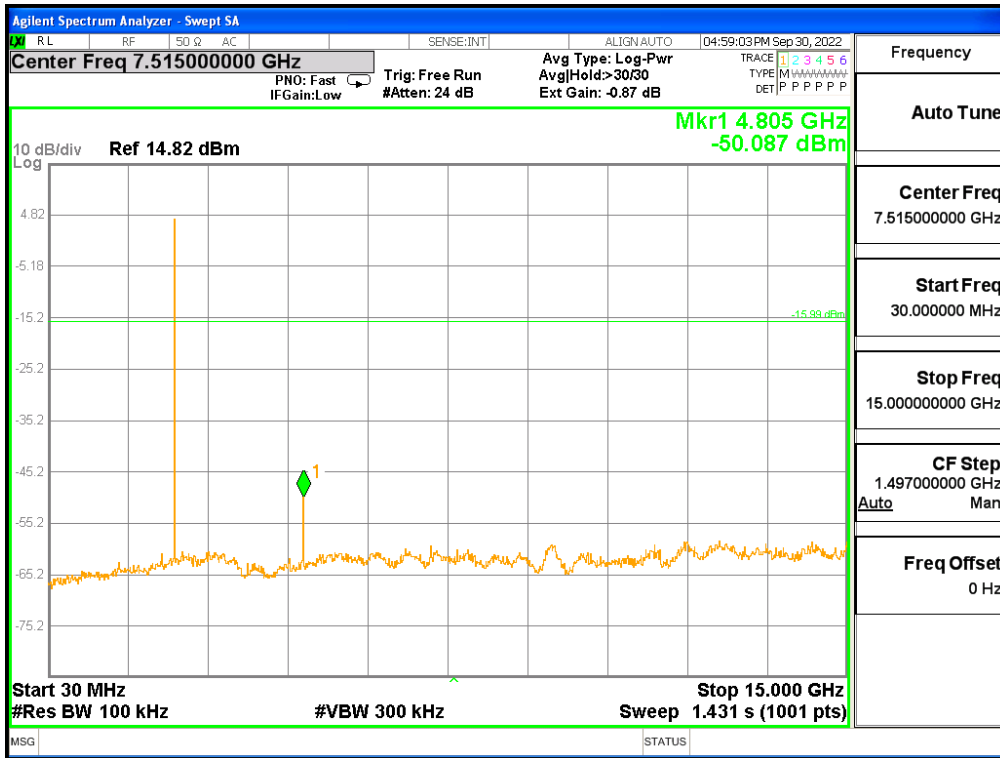




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (61) / (89) Pages

[Middle Channel]

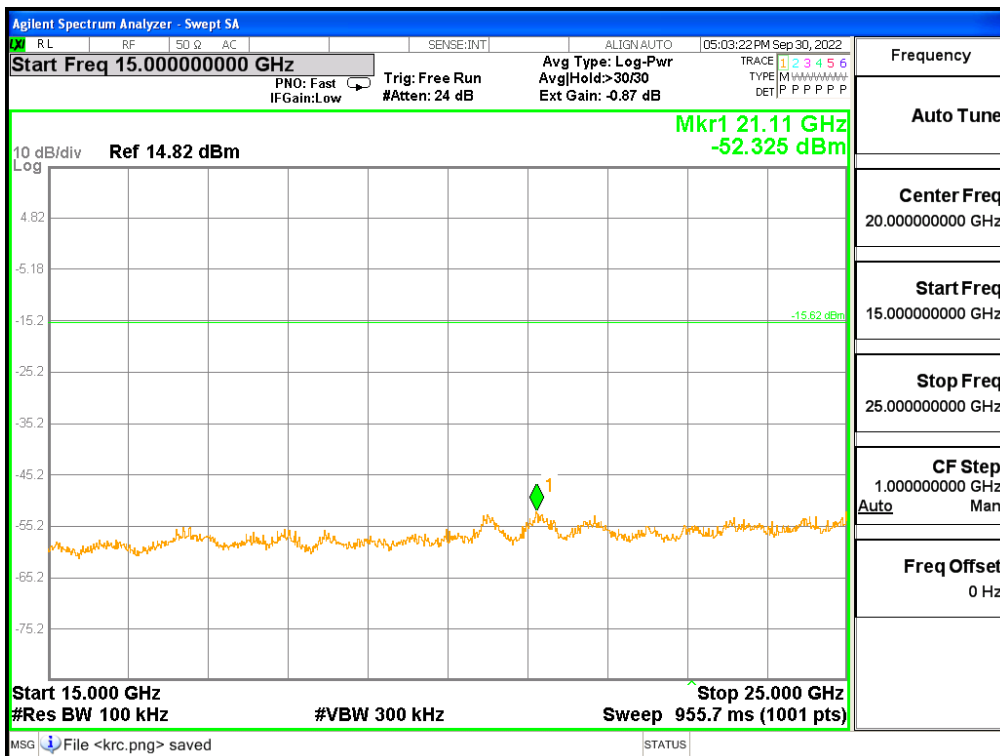
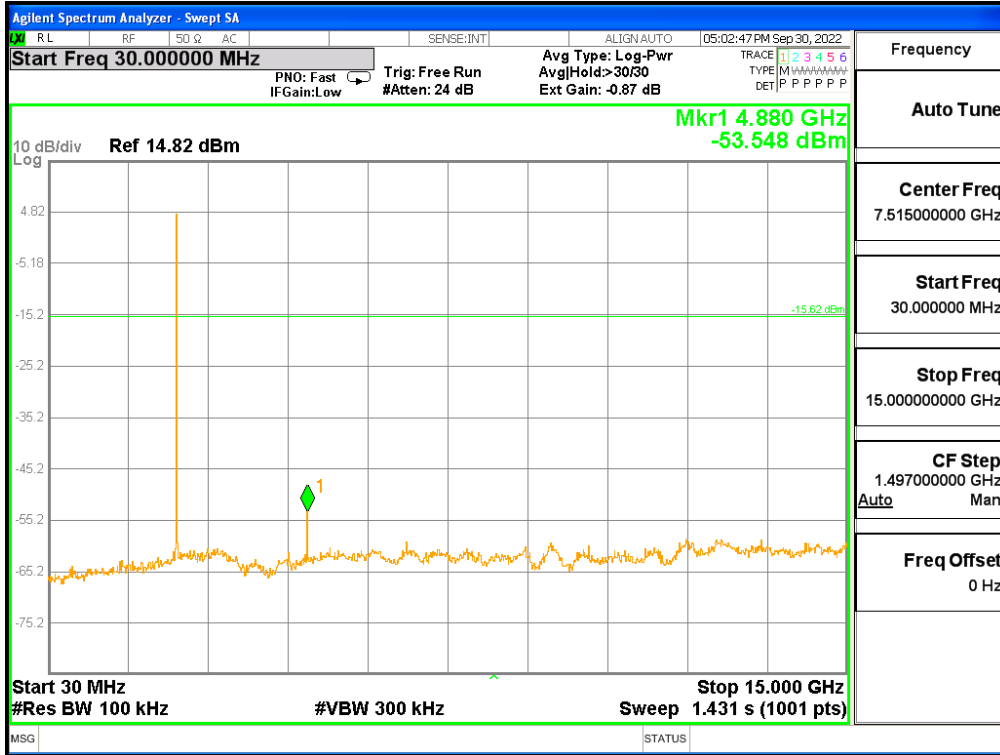




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (62) / (89) Pages

[Highest Channel]

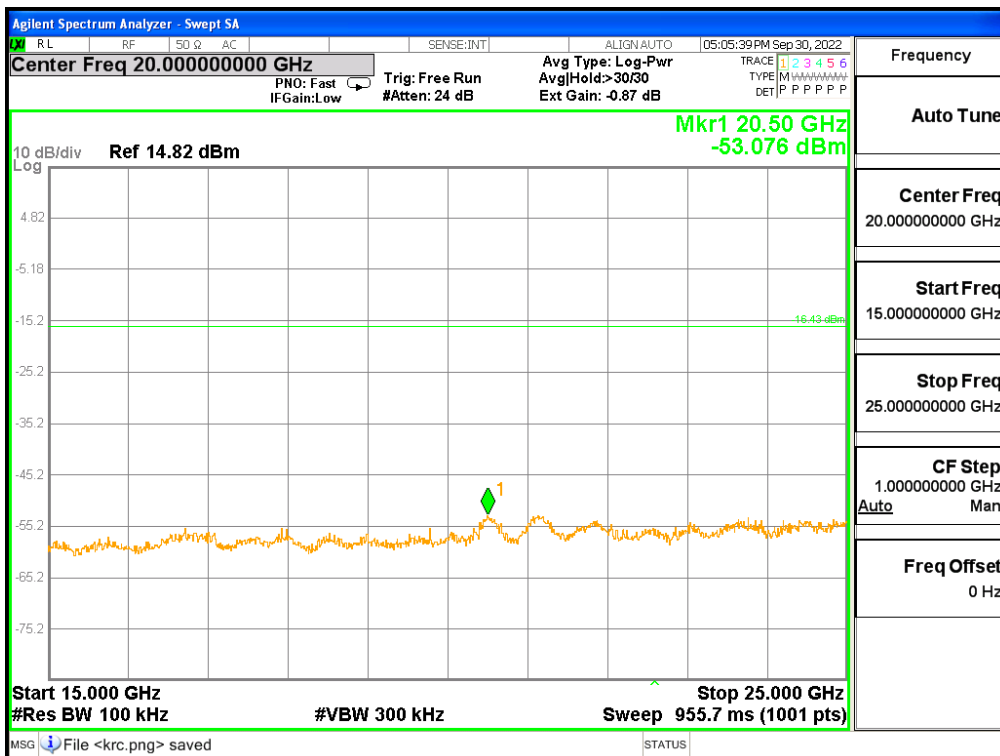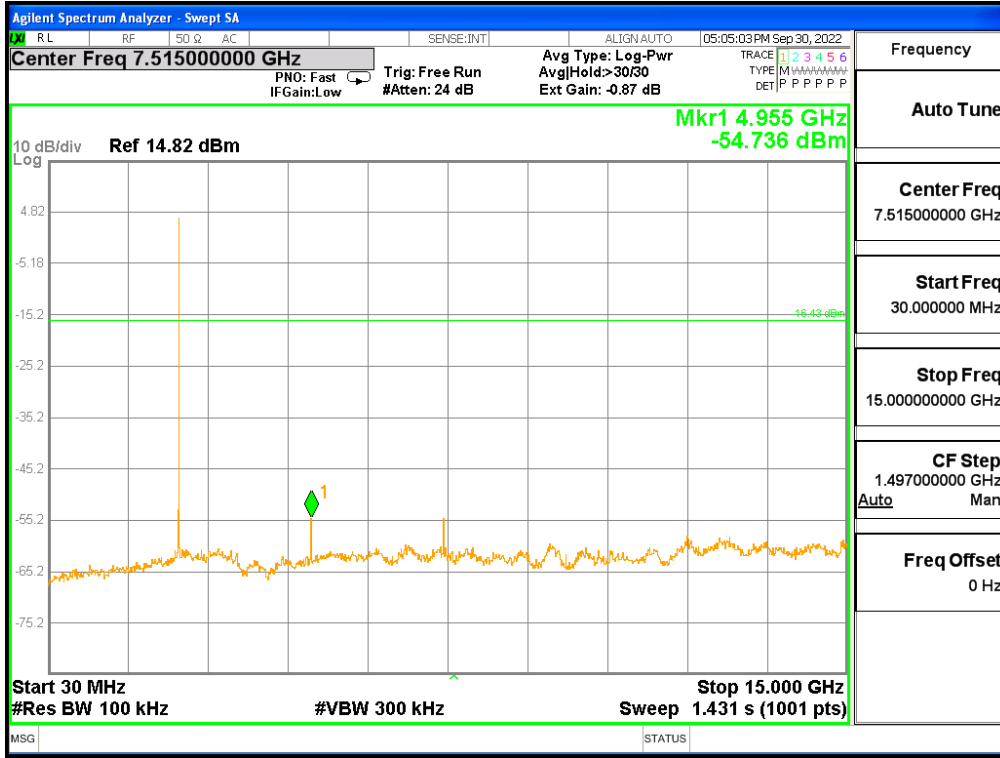

4.7 Radiated Emission

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

ANSI C63.10-2013 - Section 6.5, 6.6

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Instrument Settings

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz
- b) VBW \geq RBW
- c) Sweep time = auto couple



Limit :

Unwanted emissions that do not fall within the restricted frequency bands of Table 1 shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

Table 2. General Field Strength Limits for Licence-Exempt Transmitters

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 1 MHz for peak measurement and 10 Hz for average measurement.(Duty Cycle is > 98%,)
- 4) Duty Cycle is < 98%, VBW setting will need to > 1/T.

Test Setup:


1) For field strength of emissions from 9 kHz to 30 MHz

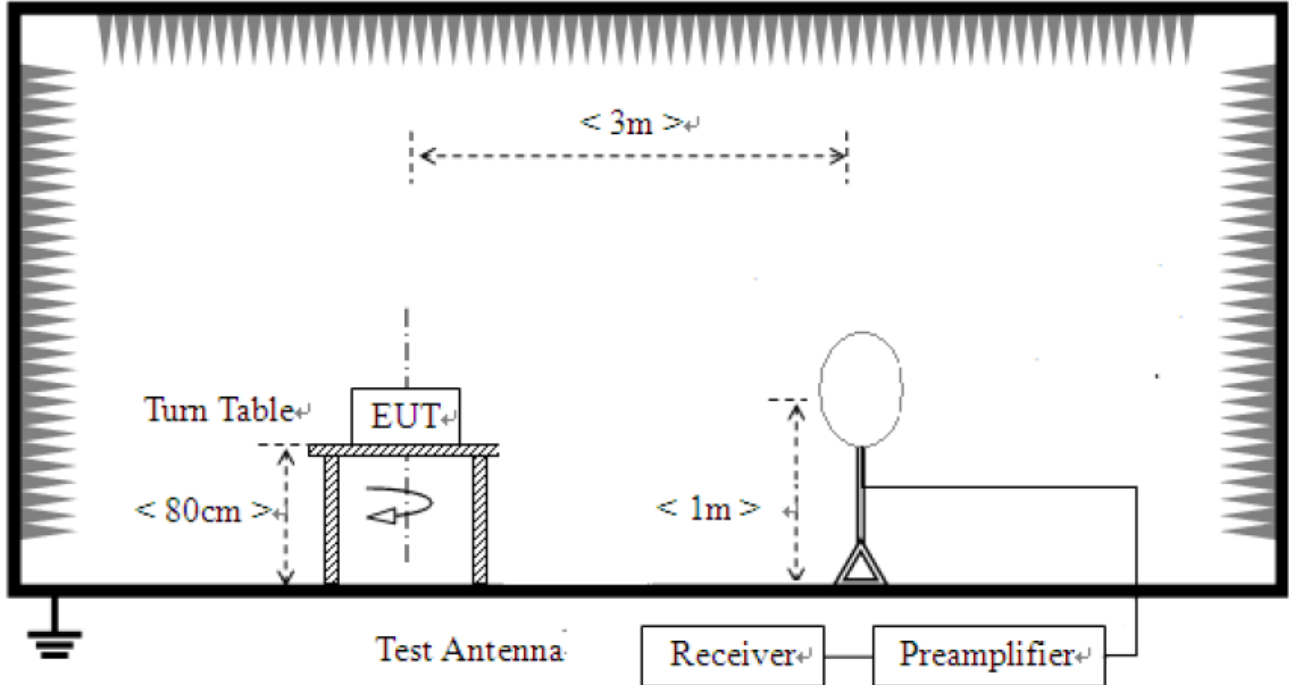

2) For field strength of emissions from 30 MHz to 1 GHz

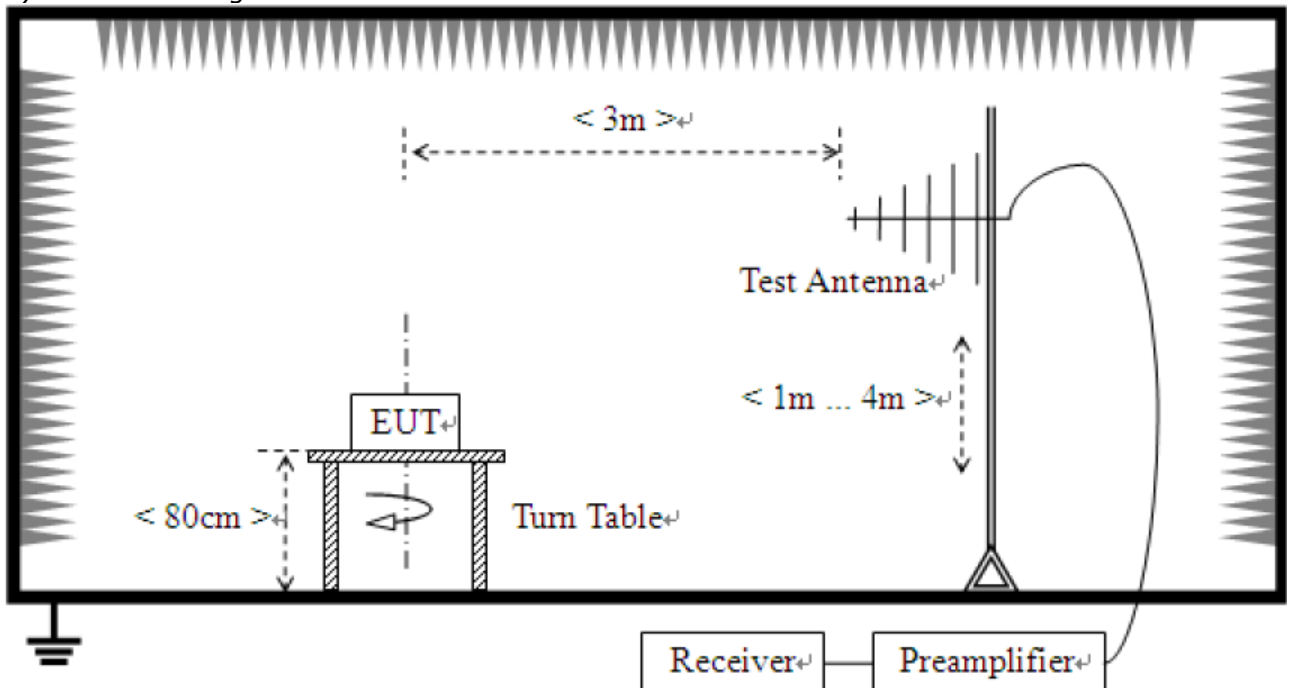

3) For field strength of emissions above 1 GHz

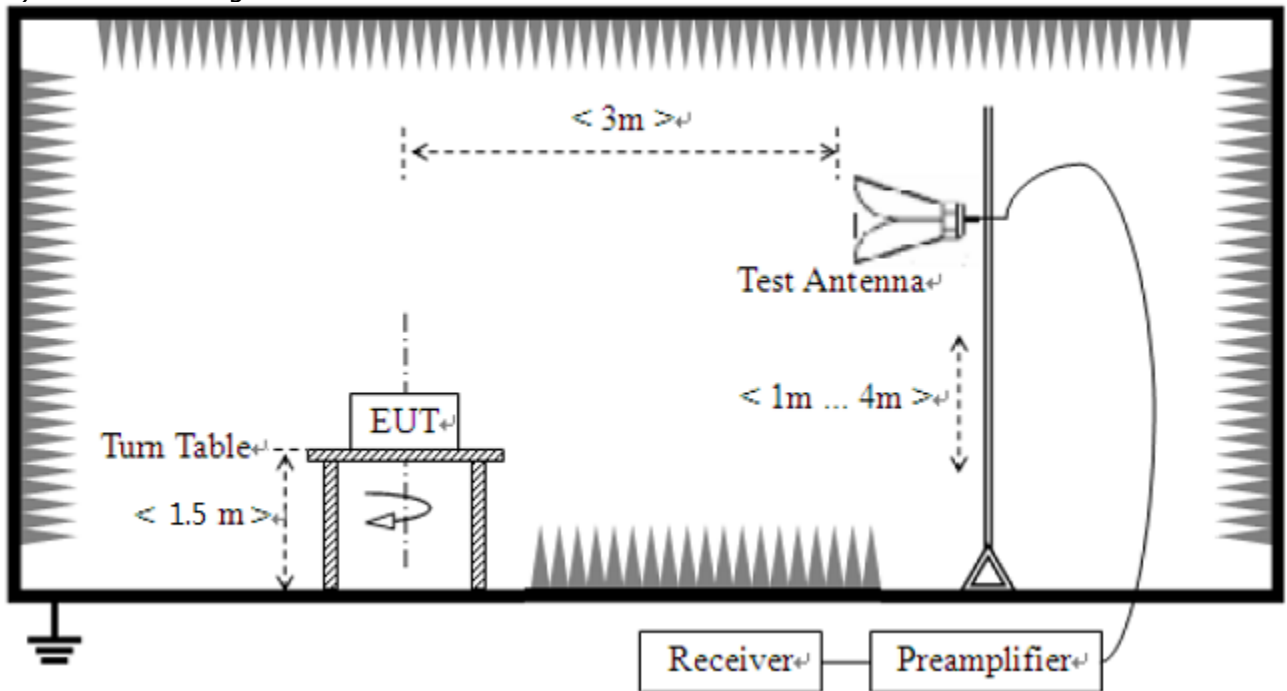

Test results


1) 9 kHz to 30 MHz

Test mode : Earbuds (L), Transmitter (Worst Case)

The requirements are:

Complies

Test Data

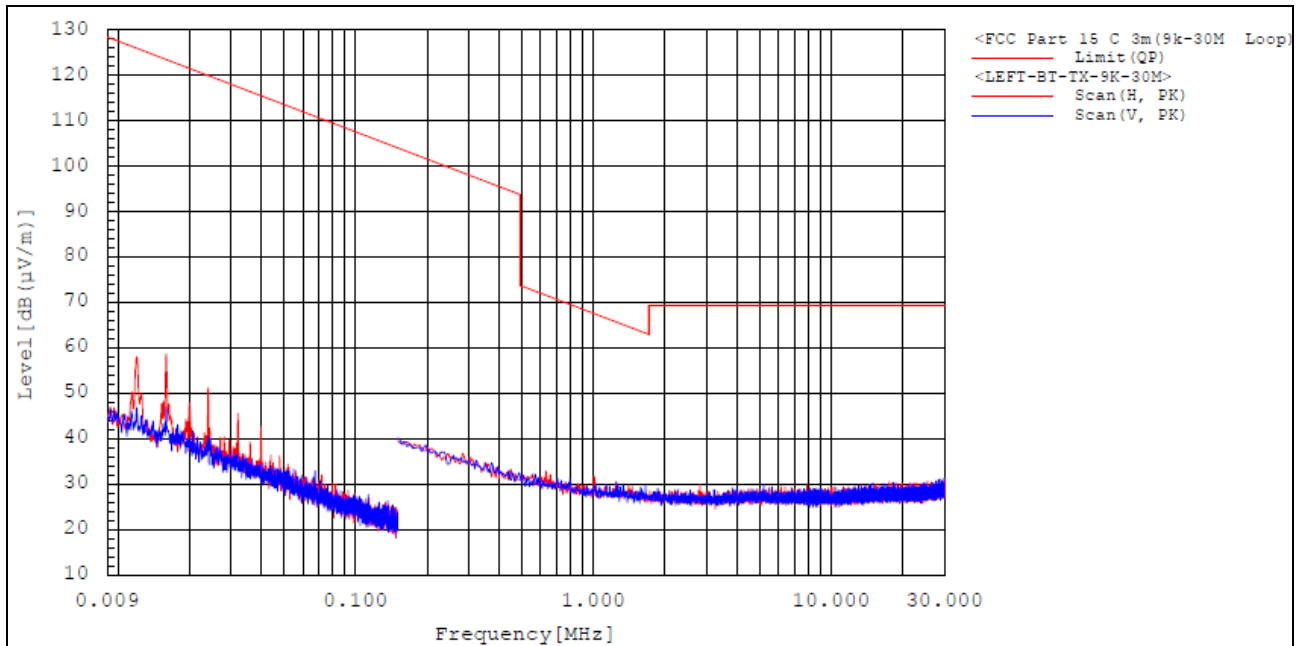

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.

Test mode : Earbuds (R), Transmitter (Worst Case)

The requirements are:

Complies

Test Data

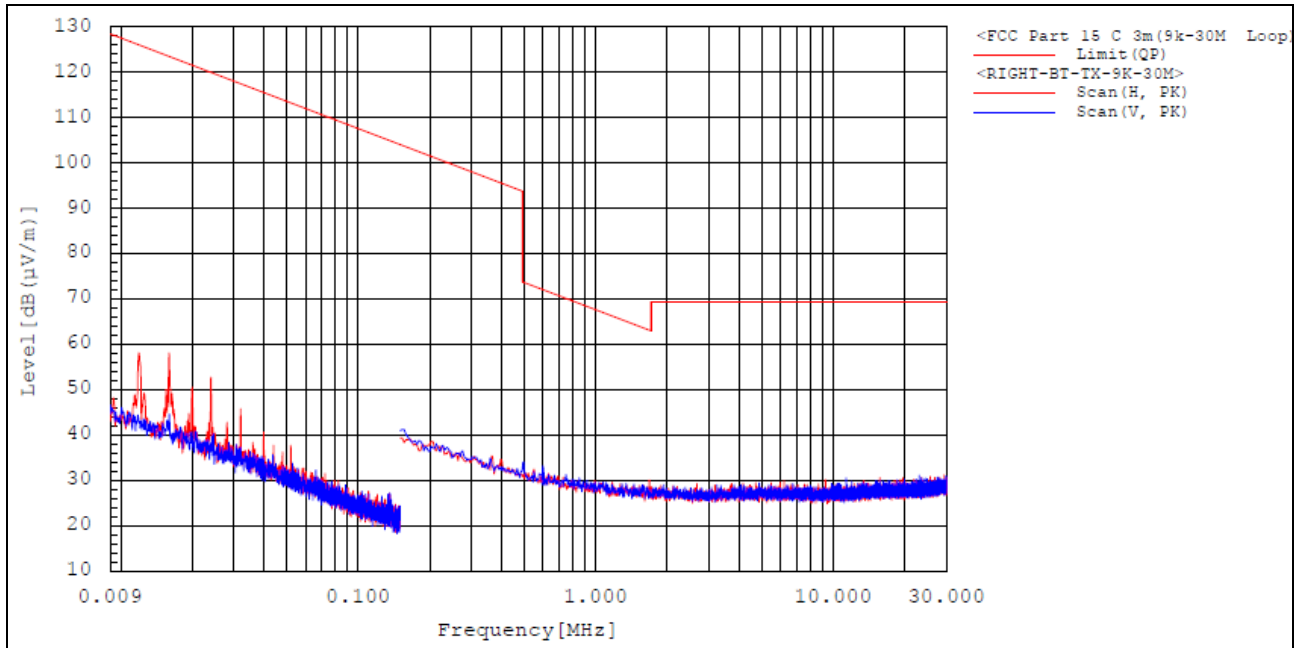

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.

Test mode : Earbuds (L), Receiver (Worst Case)

The requirements are:

Complies

Test Data

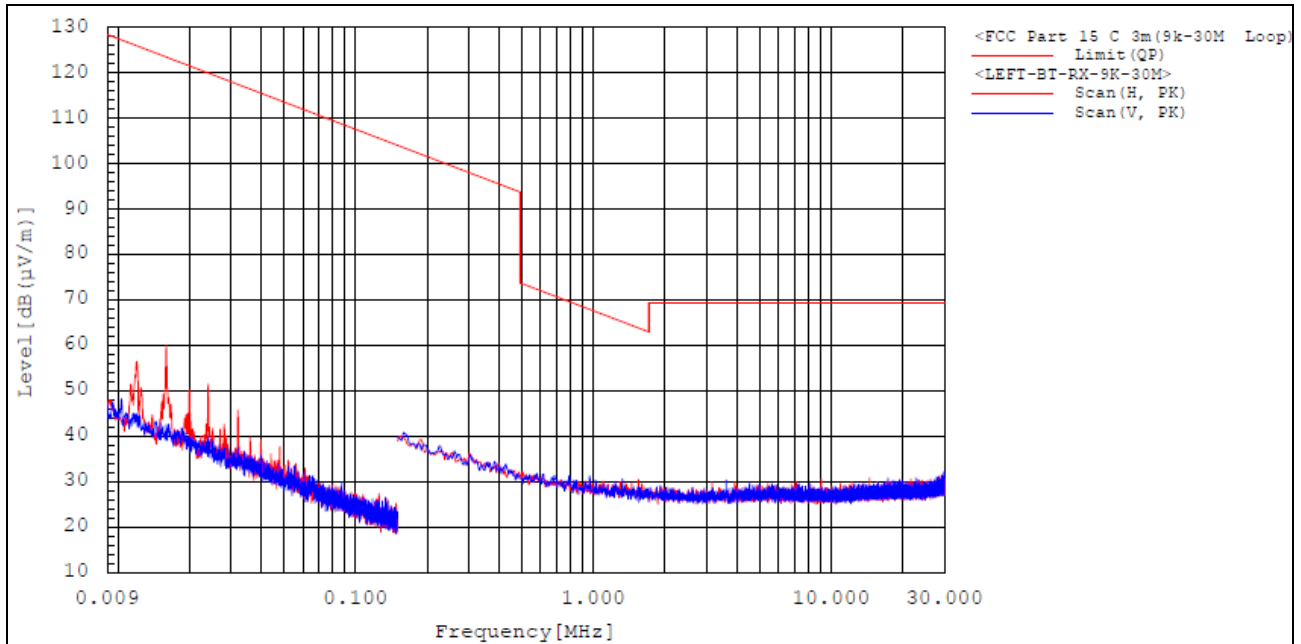

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.

Test mode : Earbuds (R), Receiver (Worst Case)

The requirements are:

Complies

Test Data

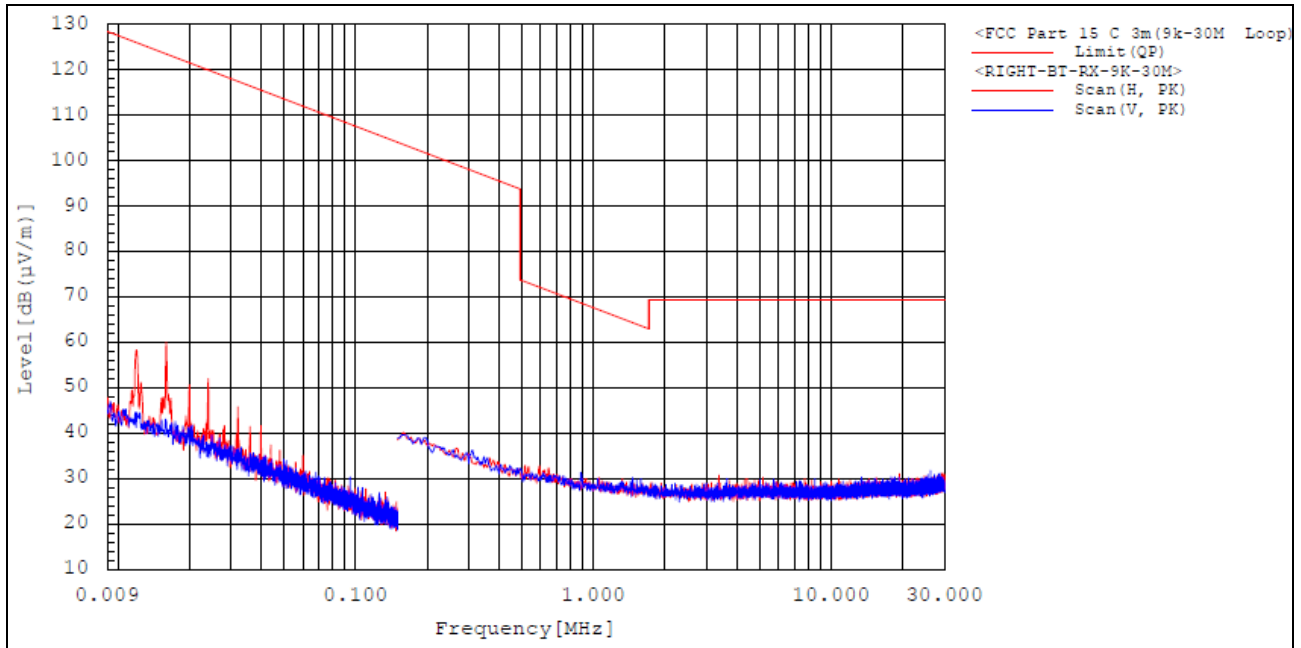

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]
-----------------	-----	----------------	---------------	------------------	------------------	-------------

The emissions 9 kHz to 30 MHz were 20 dB lower than the limit.

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. This data is the Peak(PK) value.


2) 30 MHz to 1 GHz

Test mode : Earbuds (L), Transmitter (Worst Case)

The requirements are:

Complies

Test Data

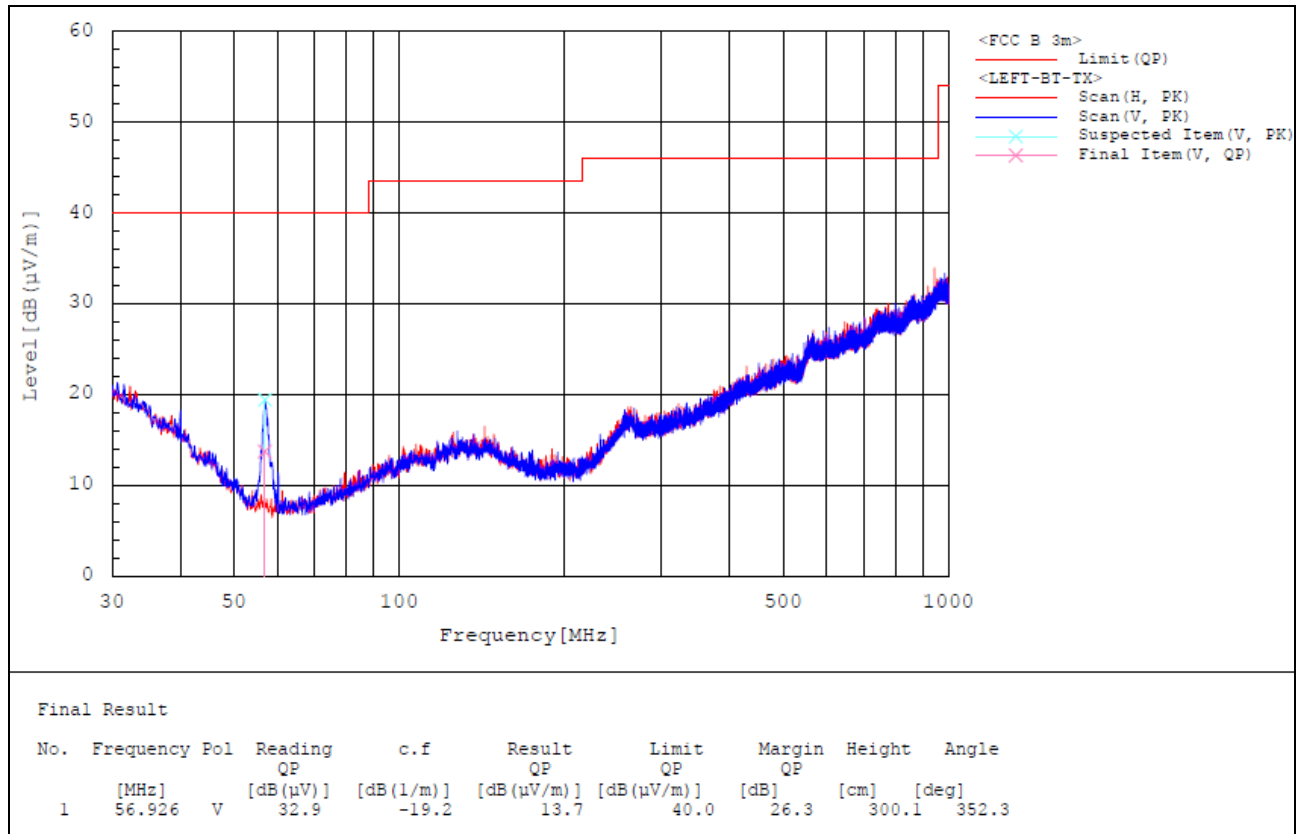

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

Test mode : Earbuds (R), Transmitter (Worst Case)

The requirements are:

Complies

Test Data

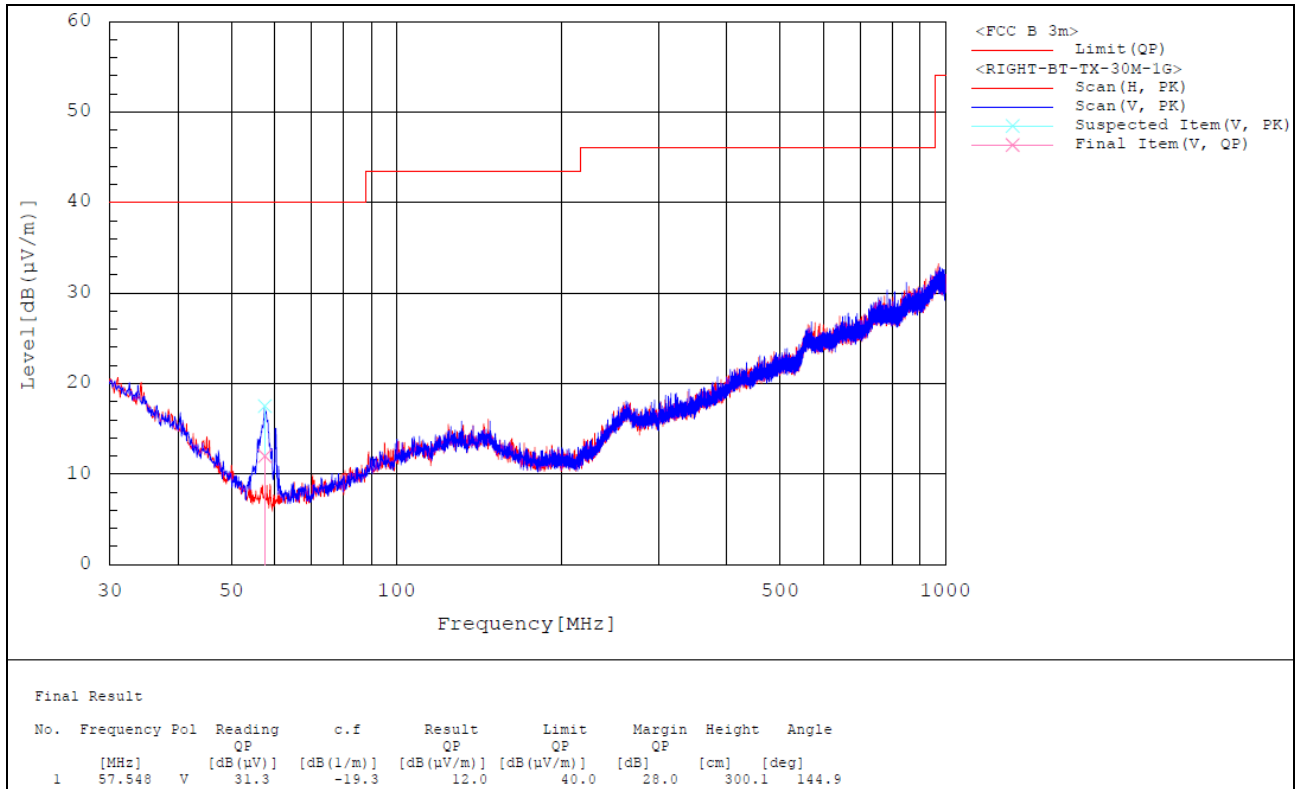

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

Test mode : Earbuds (L), Receiver (Worst Case)

The requirements are:

Complies

Test Data

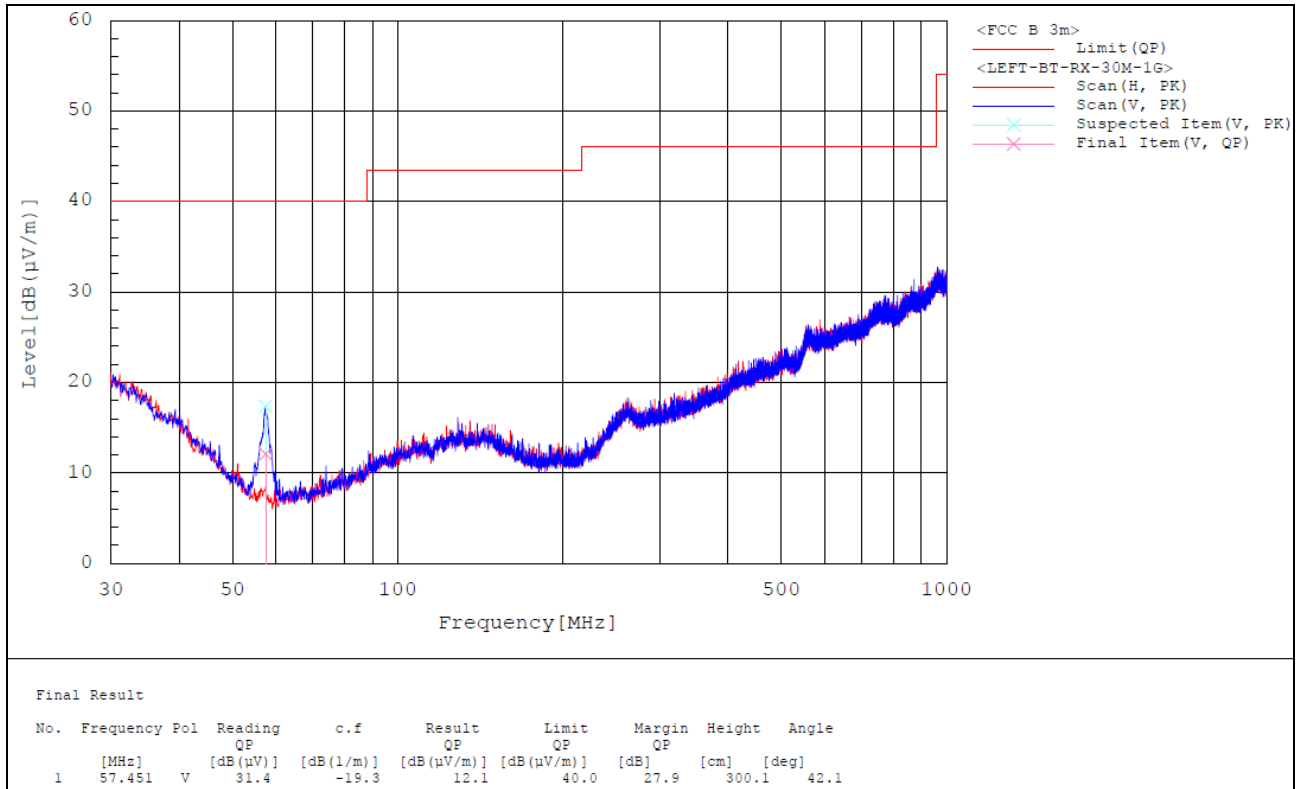

Remark :


1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain

Test mode : Earbuds (R), Receiver (Worst Case)

The requirements are:

Complies

Test Data

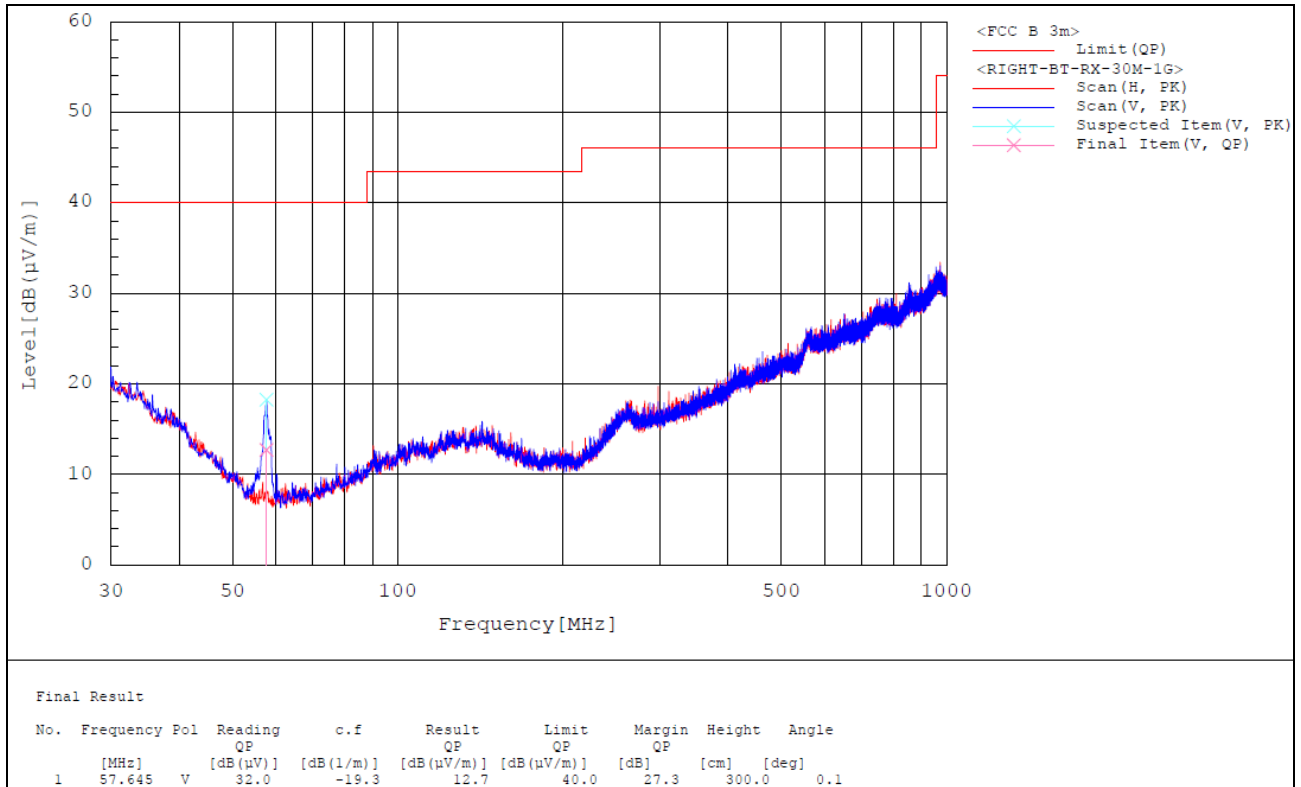

Remark :

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



3) above 1 GHz

The requirements are:

Complies

Test mode : Transmitter (Worst Case)



Test Data

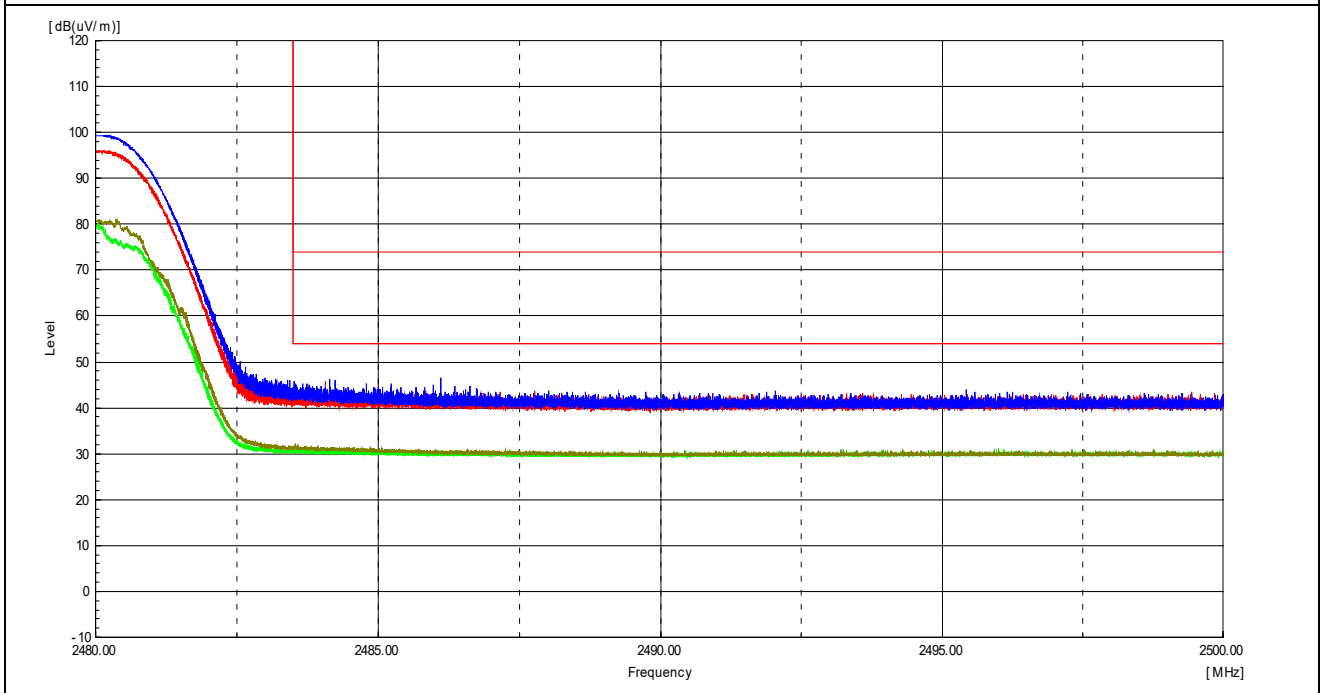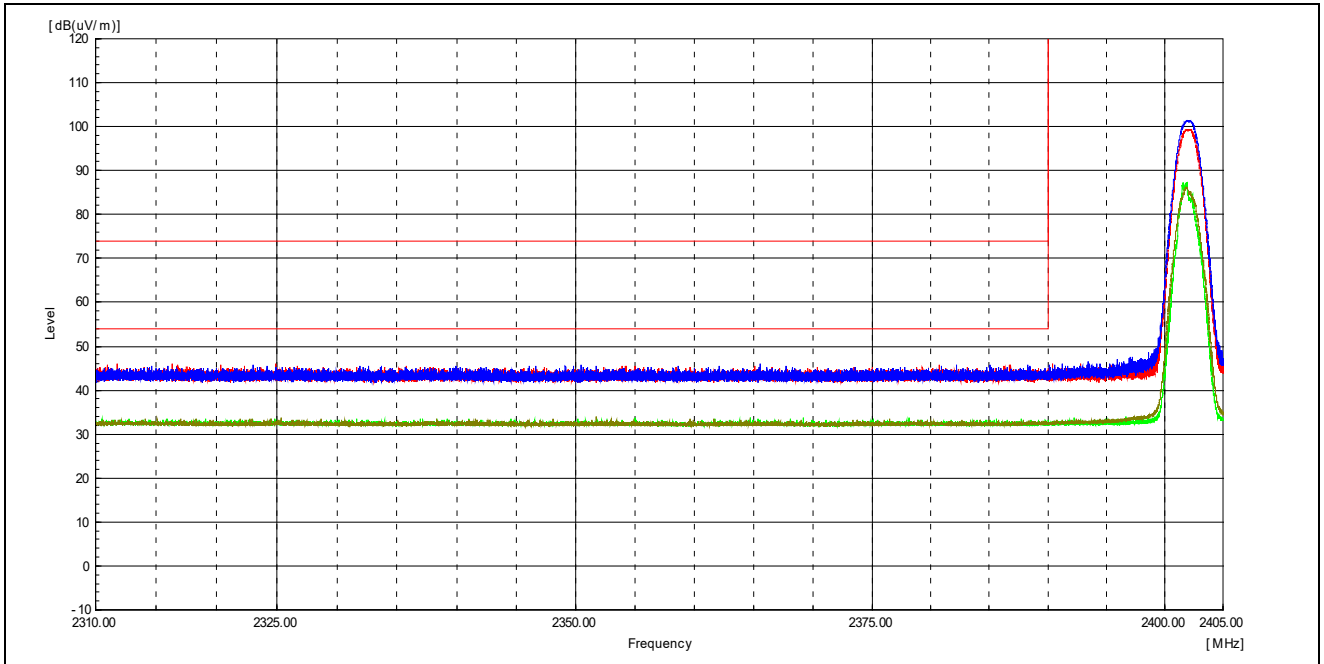



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (77) / (89) Pages

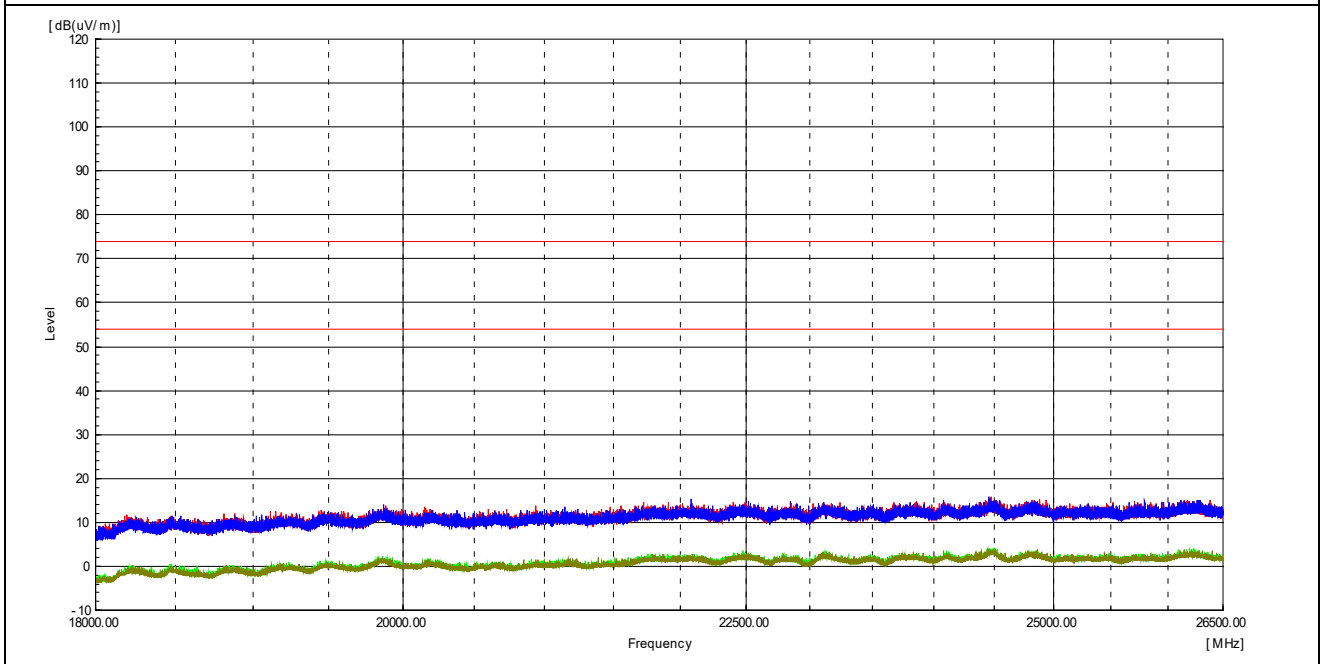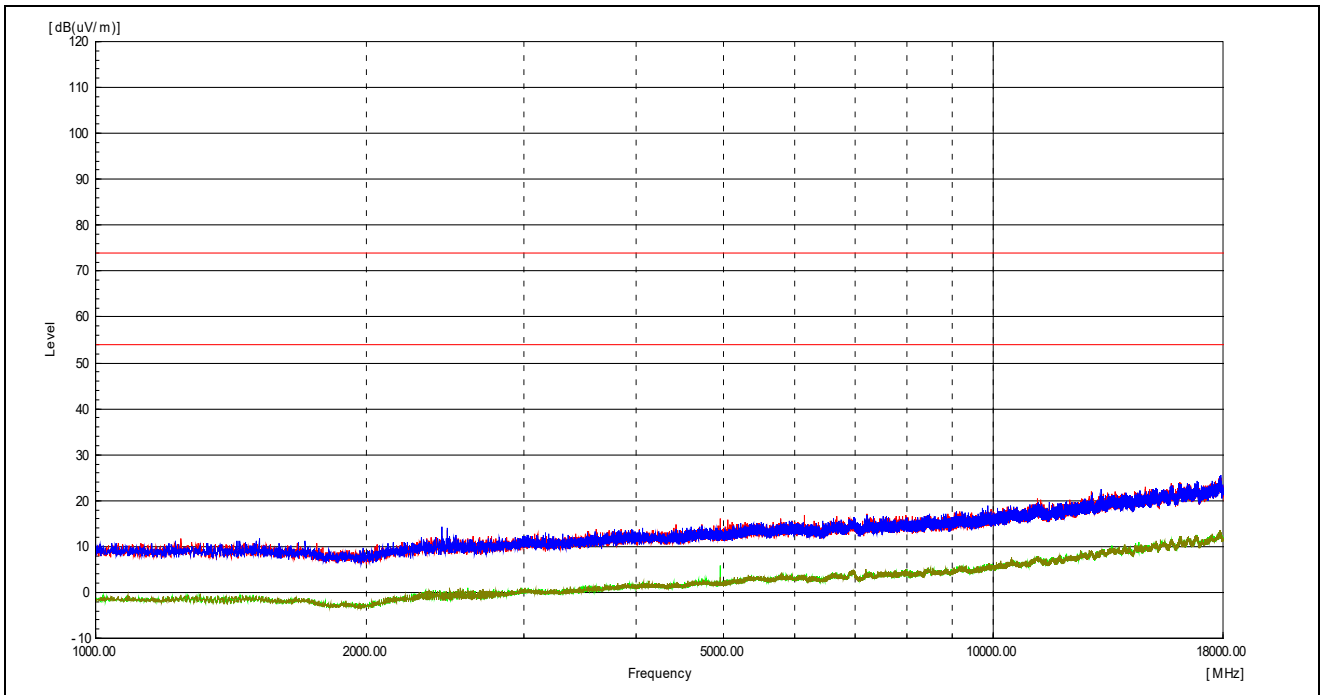

Test mode : GFSK_Earbuds (L), Transmitter

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 803.98	H	49.9	2.1	52.0	-----	74.0	-----	22.0	-----	Peak
4 804.00	H	38.4	2.1	-----	40.5	-----	54.0	-----	13.5	Average
4 803.88	V	49.1	2.1	51.2	-----	74.0	-----	22.8	-----	Peak
4 804.08	V	38.4	2.1	-----	40.5	-----	54.0	-----	13.5	Average

Middle channel (2 441 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 882.06	H	50.3	2.1	52.4	-----	74.0	-----	21.6	-----	Peak
4 881.85	H	38.7	2.1	-----	40.8	-----	54.0	-----	13.2	Average
4 881.88	V	48.9	2.1	51.0	-----	74.0	-----	23.0	-----	Peak
4 882.02	V	37.2	2.1	-----	39.3	-----	54.0	-----	14.7	Average

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 959.80	H	48.6	2.8	51.4	-----	74.0	-----	22.6	-----	Peak
4 959.94	H	37.4	2.8	-----	40.2	-----	54.0	-----	13.8	Average
4 959.89	V	48.2	2.8	51.0	-----	74.0	-----	23.0	-----	Peak
4 960.12	V	35.8	2.8	-----	38.6	-----	54.0	-----	15.4	Average

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 8-DPSK_Earbuds (L), Transmitter

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 804.25	H	50.8	2.1	52.9	-----	74.0	-----	21.1	-----	Peak
4 804.04	H	38.8	2.1	-----	40.9	-----	54.0	-----	13.1	Average
4 803.85	V	48.2	2.1	50.3	-----	74.0	-----	23.7	-----	Peak
4 804.11	V	37.4	2.1	-----	39.5	-----	54.0	-----	14.5	Average

Middle channel (2 441 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 881.94	H	49.8	2.1	51.9	-----	74.0	-----	22.1	-----	Peak
4 882.10	H	39.1	2.1	-----	41.2	-----	54.0	-----	12.8	Average
4 882.31	V	48.6	2.1	50.7	-----	74.0	-----	23.3	-----	Peak
4 882.04	V	37.0	2.1	-----	39.1	-----	54.0	-----	14.9	Average

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 959.89	H	48.8	2.8	51.6	-----	74.0	-----	22.4	-----	Peak
4 959.90	H	37.6	2.8	-----	40.4	-----	54.0	-----	13.6	Average
4 960.25	V	47.5	2.8	50.3	-----	74.0	-----	23.7	-----	Peak
4 959.86	V	35.8	2.8	-----	38.6	-----	54.0	-----	15.4	Average

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : GFSK_Earbuds (R), Transmitter

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 804.07	H	48.9	2.1	51.0	-----	74.0	-----	23.0	-----	Peak
4 804.09	H	37.5	2.1	-----	39.6	-----	54.0	-----	14.4	Average
4 803.93	V	48.7	2.1	50.8	-----	74.0	-----	23.2	-----	Peak
4 803.97	V	39.3	2.1	-----	41.4	-----	54.0	-----	12.6	Average

Middle channel (2 441 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 882.24	H	47.8	2.1	49.9	-----	74.0	-----	24.1	-----	Peak
4 881.81	H	38.4	2.1	-----	40.5	-----	54.0	-----	13.5	Average
4 881.85	V	49.2	2.1	51.3	-----	74.0	-----	22.7	-----	Peak
4 881.84	V	38.9	2.1	-----	41.0	-----	54.0	-----	13.0	Average

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 959.48	H	47.1	2.8	49.9	-----	74.0	-----	24.1	-----	Peak
4 960.06	H	36.3	2.8	-----	39.1	-----	54.0	-----	14.9	Average
4 960.22	V	47.3	2.8	50.1	-----	74.0	-----	23.9	-----	Peak
4 959.99	V	36.9	2.8	-----	39.7	-----	54.0	-----	14.3	Average

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain



Test mode : 8-DPSK_Earbuds (R), Transmitter

Lowest channel (2 402 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 803.96	H	48.4	2.1	50.5	-----	74.0	-----	23.5	-----	Peak
4 804.11	H	37.7	2.1	-----	39.8	-----	54.0	-----	14.2	Average
4 804.03	V	48.9	2.1	51.0	-----	74.0	-----	23.0	-----	Peak
4 803.94	V	39.3	2.1	-----	41.4	-----	54.0	-----	12.6	Average

Middle channel (2 441 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 881.97	H	47.6	2.1	49.7	-----	74.0	-----	24.3	-----	Peak
4 882.10	H	38.3	2.1	-----	40.4	-----	54.0	-----	13.6	Average
4 882.03	V	48.1	2.1	50.2	-----	74.0	-----	23.8	-----	Peak
4 882.15	V	38.6	2.1	-----	40.7	-----	54.0	-----	13.3	Average

Highest channel (2 480 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
4 959.93	H	46.4	2.8	49.2	-----	74.0	-----	24.8	-----	Peak
4 959.84	H	35.8	2.8	-----	38.6	-----	54.0	-----	15.4	Average
4 959.97	V	47.5	2.8	50.3	-----	74.0	-----	23.7	-----	Peak
4 960.04	V	37.3	2.8	-----	40.1	-----	54.0	-----	13.9	Average



Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain



Test mode : Receiver (Worst Case)

Test Data

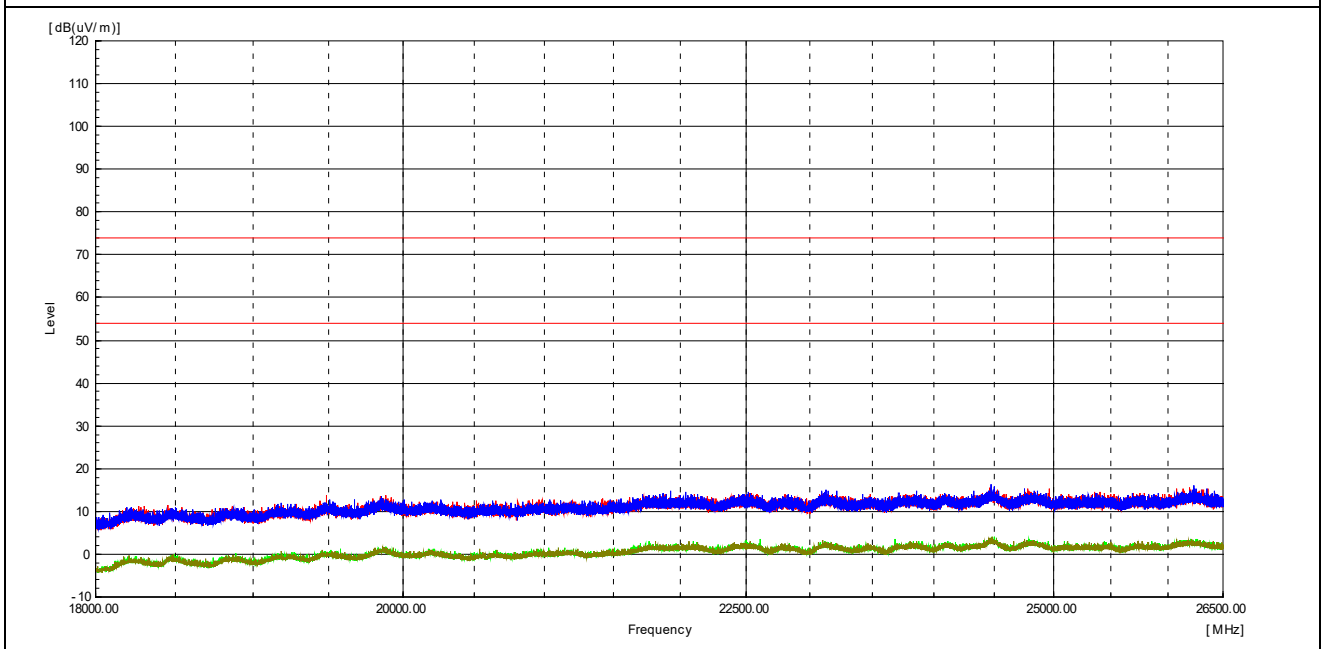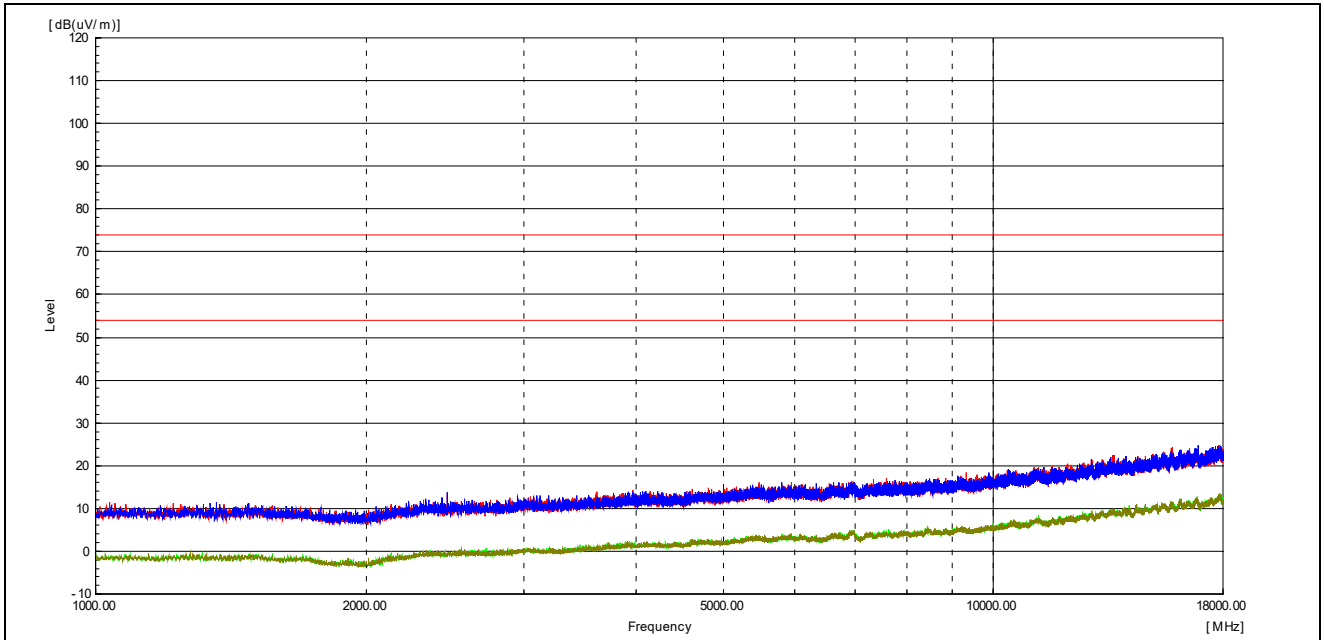



Test mode : Earbuds (L), Receiver (Worst Case)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Test mode : Earbuds (R), Receiver (Worst Case)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.
2. Correction factor = Antenna factor + Cable loss - Amp Gain

4.8 AC Power Line Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

ANSI C63.10-2013 - Section 6.2
RSS-Gen - Section 8.8

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results


The requirements are:

Complies

Test Data

[LINE]

(with EC)3CE_Class B_L1

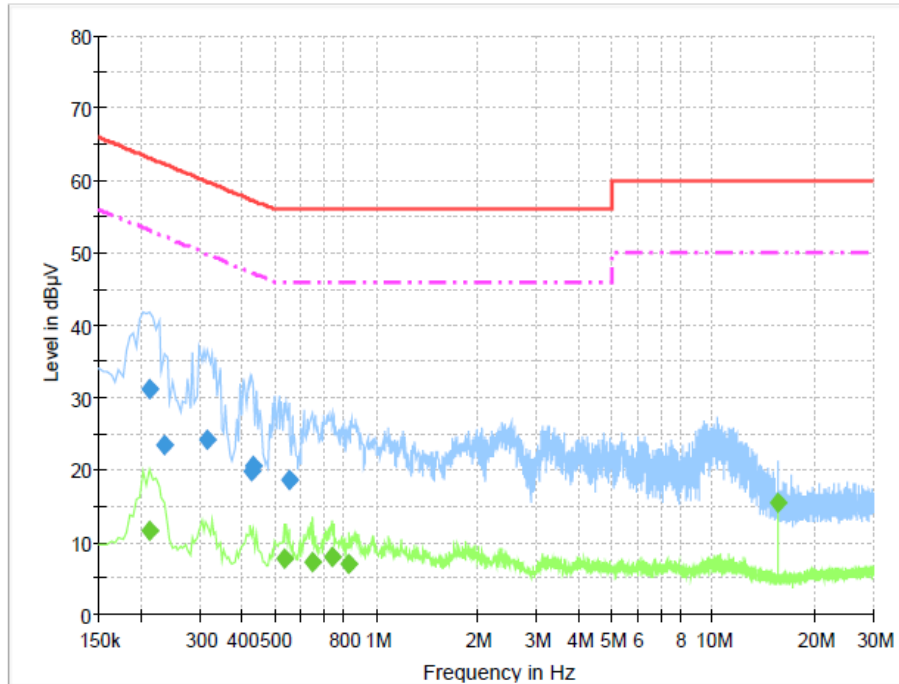


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.213000	31.3	1000.0	9.000	On	L1	9.9	31.8	63.1
0.235500	23.5	1000.0	9.000	On	L1	9.8	38.7	62.3
0.316500	24.1	1000.0	9.000	On	L1	9.9	35.7	59.8
0.429000	19.9	1000.0	9.000	On	L1	10.0	37.4	57.3
0.433500	20.4	1000.0	9.000	On	L1	10.0	36.8	57.2
0.550500	18.7	1000.0	9.000	On	L1	10.0	37.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.213000	11.6	1000.0	9.000	On	L1	9.9	41.5	53.1
0.532500	7.7	1000.0	9.000	On	L1	10.0	38.3	46.0
0.649500	7.2	1000.0	9.000	On	L1	10.0	38.8	46.0
0.739500	8.1	1000.0	9.000	On	L1	10.0	37.9	46.0
0.829500	7.0	1000.0	9.000	On	L1	9.9	39.0	46.0
15.697500	15.6	1000.0	9.000	On	L1	10.5	34.4	50.0

[NEUTRAL]
(with EC)3CE_Class B_N

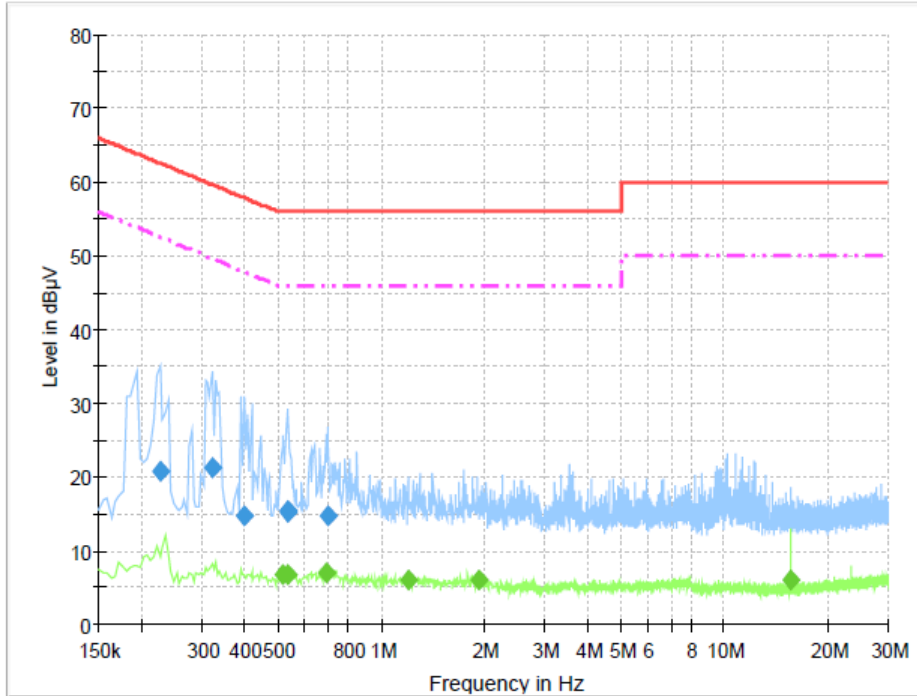

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.226500	20.8	1000.0	9.000	On	N	9.8	41.8	62.6
0.321000	21.3	1000.0	9.000	On	N	10.0	38.4	59.7
0.397500	14.7	1000.0	9.000	On	N	10.1	43.2	57.9
0.532500	15.3	1000.0	9.000	On	N	10.1	40.7	56.0
0.537000	15.5	1000.0	9.000	On	N	10.1	40.5	56.0
0.699000	14.7	1000.0	9.000	On	N	10.0	41.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.519000	6.9	1000.0	9.000	On	N	10.1	39.1	46.0
0.537000	6.8	1000.0	9.000	On	N	10.1	39.2	46.0
0.694500	7.0	1000.0	9.000	On	N	10.0	39.0	46.0
1.198500	6.0	1000.0	9.000	On	N	9.9	40.0	46.0
1.918500	5.9	1000.0	9.000	On	N	9.9	40.1	46.0
15.693000	6.0	1000.0	9.000	On	N	10.6	44.0	50.0

4.9 Frequency Hopping System Requirements

Standard Applicable


According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

EUT Pseudorandom Frequency Hopping Sequence

The pseudo random sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9 Length of pseudo-random sequence: $2^9 - 1 = 511$ bits Longest sequence of zeros: 8 (non-inverted signal)

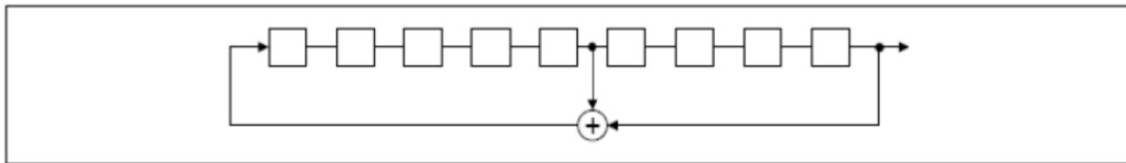

Linear Feedback Shift Register for Generation of the PRBS sequence

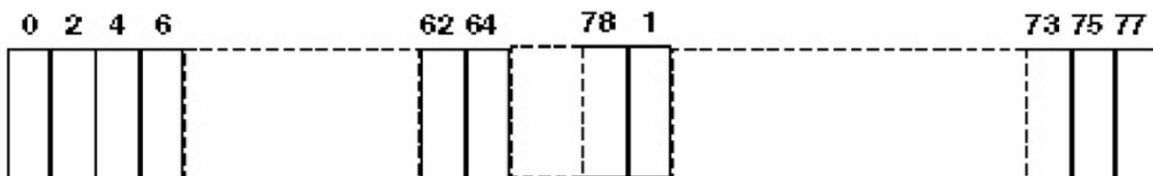

Each frequency used equally on the average by each transmitter. The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2022-02964
Page (88) / (89) Pages

Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

*Example for a Bluetooth device using channel numbers would be :

Ch 44, 35, 78, 03, 15, 21, 76, 40, 56, 13, 02, 19, 67, 39, 78, 20, 21, 64, 75 etc.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2022-02964
 Page (89) / (89) Pages

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY46471102	2022-01-13	2023-01-13
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2022-03-25	2023-03-25
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2022-05-04	2023-05-04
4	BILOG ANTENNA	TESEQ	CBL6111D	60654	2021-09-03	2023-09-03
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2022-04-15	2024-04-15
6	6dB Attenuator	PASTERNAK	PE7AP006-06	L20210504000023	2022-08-10	2023-08-10
7	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2022-08-10	2023-08-10
8	Spectrum Analyzer	R&S	FSV40	101574	2022-01-12	2023-01-12
9	PRE AMPLIFIER	HP	8449B	3008A00620	2022-05-10	2023-05-10
10	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2022-04-14	2023-04-14
11	HORN ANTENNA	SCHWARZBECK	BBHA9170	1153	2021-11-16	2022-11-16
					2022-10-31	2023-10-31
12	LOW NOISE AMPLIFIER	TESTEK	TK-PA1840H	210124-L	2021-11-15	2022-11-15
					2022-11-09	2023-11-09
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2022-01-07	2023-01-07
14	EMI Test Receiver	R&S	ESCI3	100032	2022-01-11	2023-01-11
15	LISN	R&S	ENV216	101236	2022-10-17	2023-10-17

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	1512S151	2022-09-30
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2022-04-12
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2022-09-21
4	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2022-09-21
5	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2022-04-14
6	RF Cable (1 GHz - 18 GHz Radiated)	Rosenberger	NONE	1520.9927.00	2022-04-14
7	RF Cable (1 GHz - 18 GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2022-04-14
8	RF Cable (18 GHz - 26.5 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2372/2	2022-04-14
9	RF Cable (18 GHz - 26.5 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 102	MY2371/2	2022-04-14
10	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2022-04-14

-END-