

Page 37 of 54 Report No.: CTA24042500401

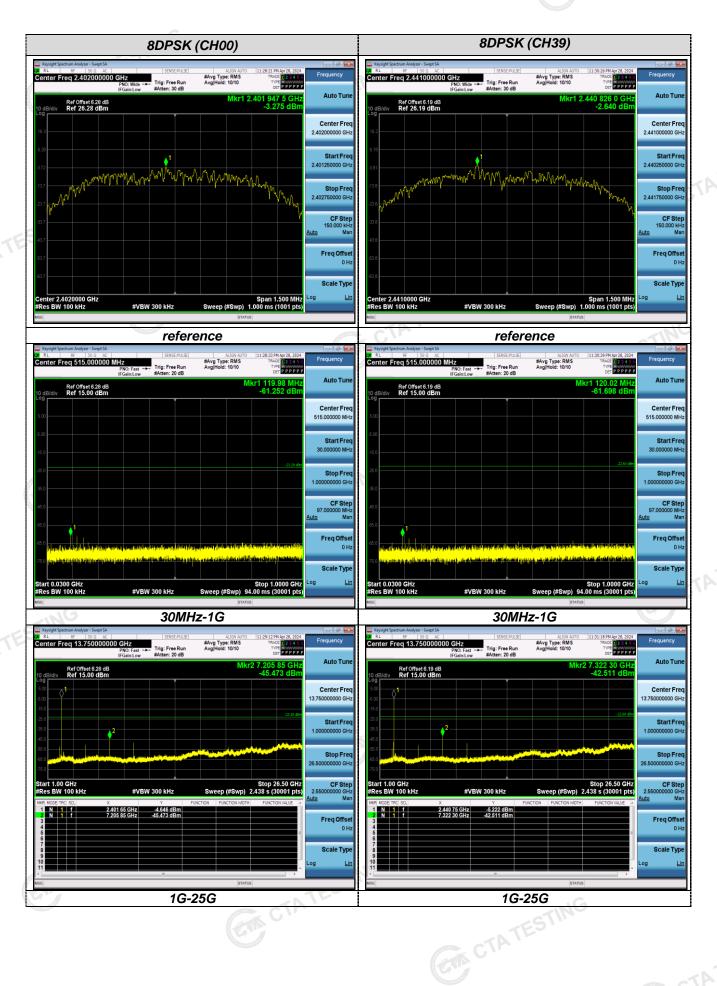

Page 38 of 54 Report No.: CTA24042500401

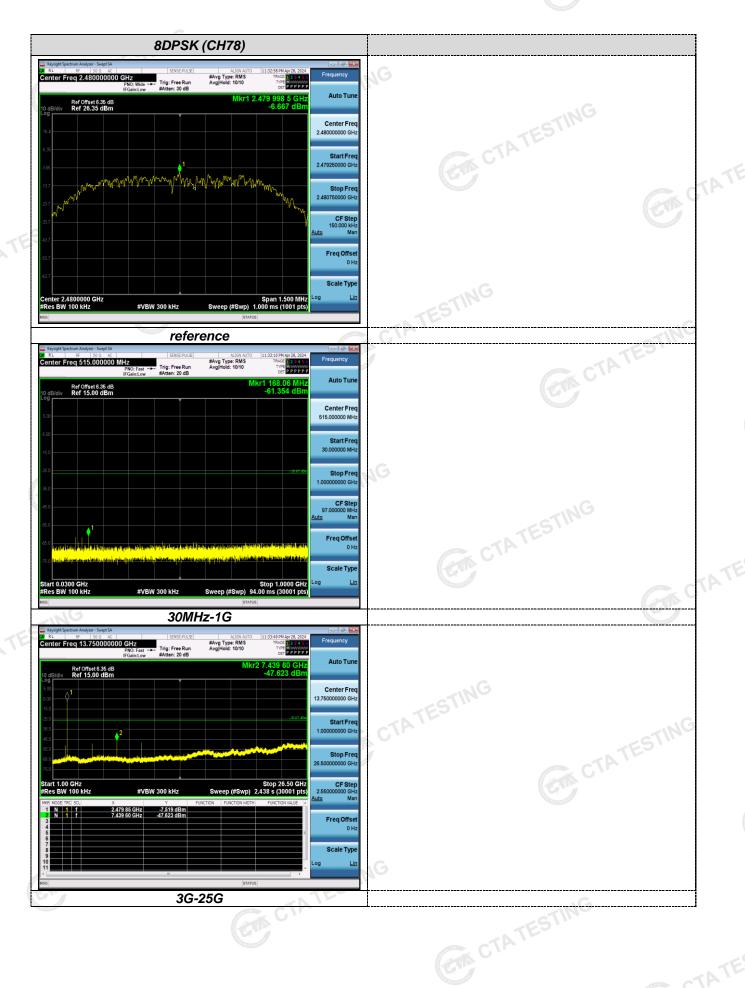

Page 39 of 54 Report No.: CTA24042500401

Band-edge Measurements for RF Conducted Emissions: URL RF 50 Q AC

Center Freq 2.510000000 GHz
PNO: Fast →
Stricted ow
Aften: 20 dB RL RF 50 Q AC

Inter Freq 2.352500000 GHz

PNO: Fast

PNO: Fast

Atten: 20 dB #Avg Type: RMS Avg|Hold: 100/100 #Avg Type: RMS Avg|Hold: 100/100 Ref Offset 6.28 dB Ref 15.00 dBm Ref Offset 6.35 dB Ref 15.00 dBm Center Free Center Fre Stop Fre 2.550000000 GH Stop 2.40500 GHz ep (#Swp) 10.07 ms (1001 pts CF Step 00000 MH Mai CF Step Scale Typ Scale Type Left Band edge hoping off Right Band edge hoping off #Avg Type: RMS Avg|Hold:>100/100 #Avg Type: RMS Avg|Hold:>100/100 Auto Tun Auto Tun Ref Offset 6.06 dB Ref 15.00 dBm Ref Offset 6.22 dB Ref 15.00 dBm Center Fre 2.352500000 GH والرجوانيين وبالأفرو الممالور واللي Stop Fre Stop Fre CF Step 10.500000 M #VBW 300 kHz

Scale Typ


Left Band edge hoping on

CTA TESTING


Freq Offset 0 Hz Scale Type

Right Band edge hoping on

Page 40 of 54 Report No.: CTA24042500401

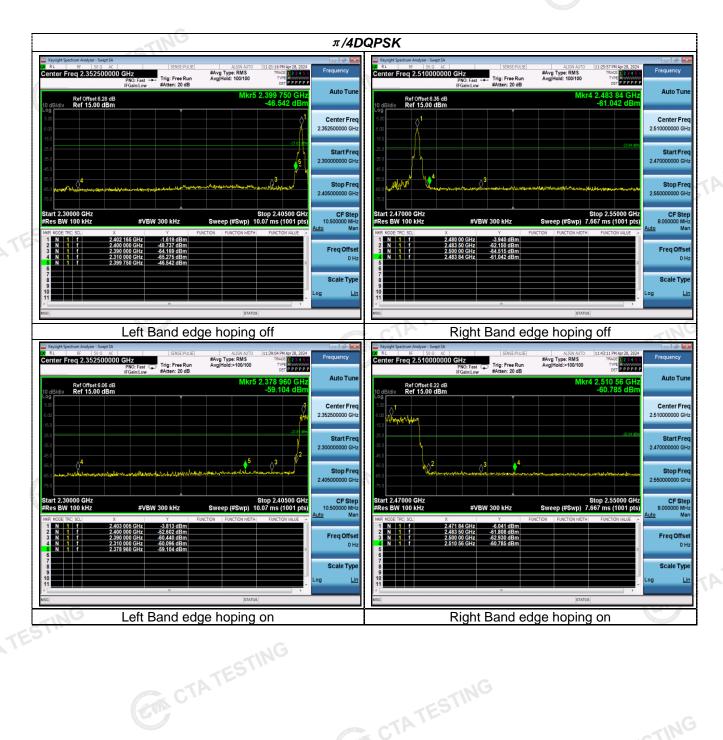

Page 41 of 54 Report No.: CTA24042500401

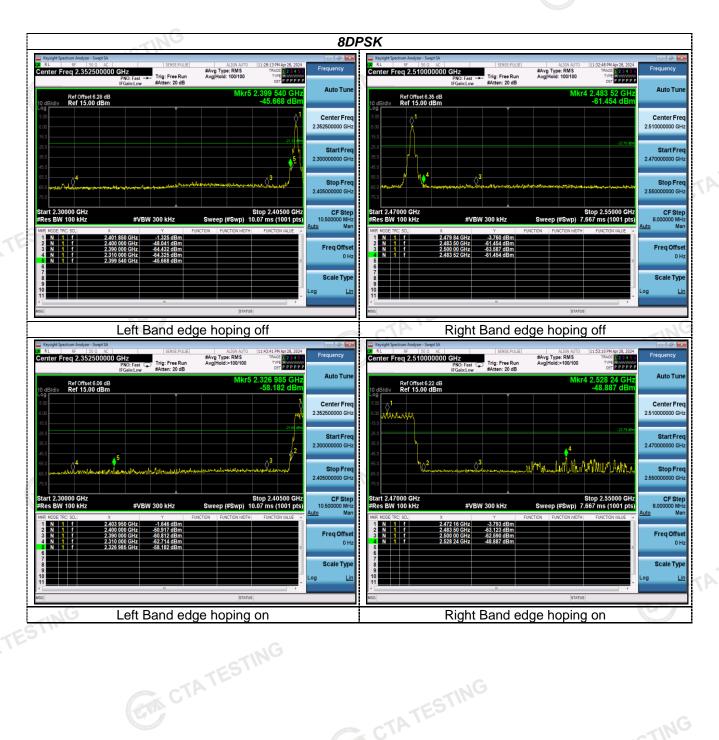

Page 42 of 54 Report No.: CTA24042500401

## **Pseudorandom Frequency Hopping Sequence**

#### **TEST APPLICABLE**


### For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

## **EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nice-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

Page 43 of 54 Report No.: CTA24042500401

#### 4.10 Antenna Requirement

#### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **Antenna Connected Construction**

The maximum gain of antenna was 2.00 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility. CTATES

Report No.: CTA24042500401 Page 44 of 54

# Test Setup Photos of the EUT








Report No.: CTA24042500401 Page 45 of 54

# Photos of the EUT





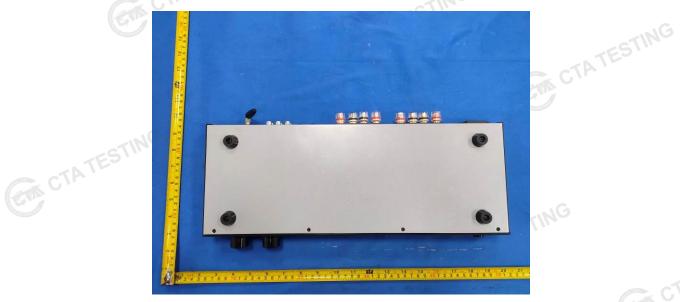


Report No.: CTA24042500401 Page 46 of 54








Page 47 of 54 Report No.: CTA24042500401

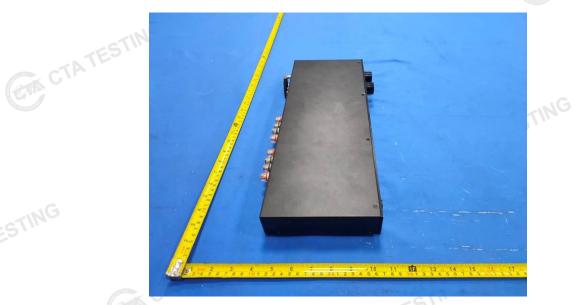






Report No.: CTA24042500401 Page 48 of 54

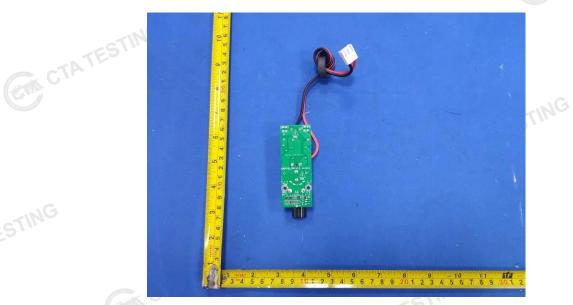






Report No.: CTA24042500401 Page 49 of 54

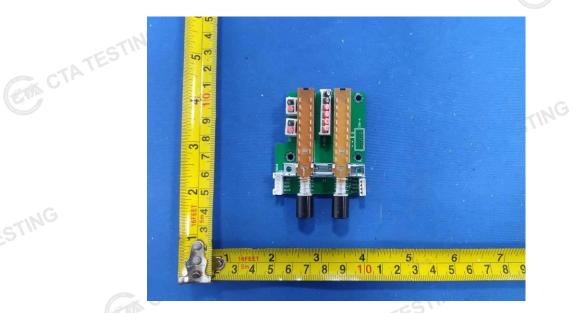

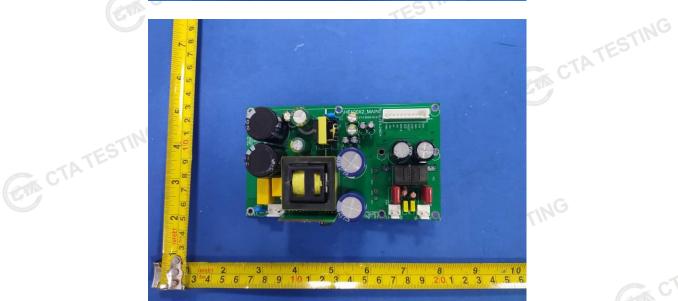




Report No.: CTA24042500401 Page 50 of 54








Report No.: CTA24042500401 Page 51 of 54

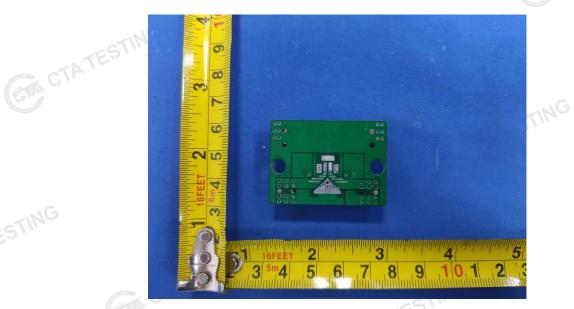





Report No.: CTA24042500401 Page 52 of 54

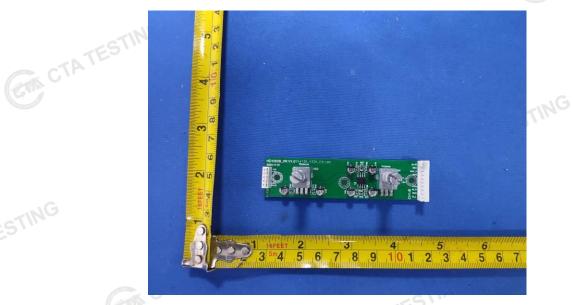






Report No.: CTA24042500401 Page 53 of 54



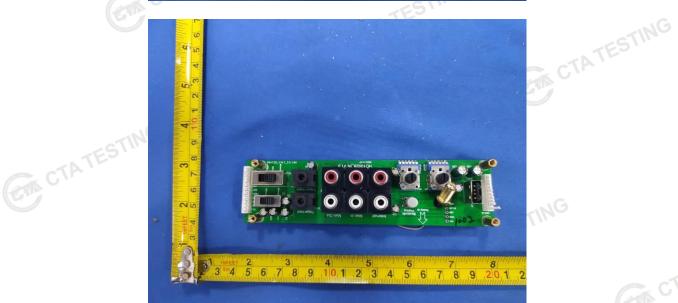



Report No.: CTA24042500401 Page 54 of 54

