




11N40MIMO\_Ant1\_2437

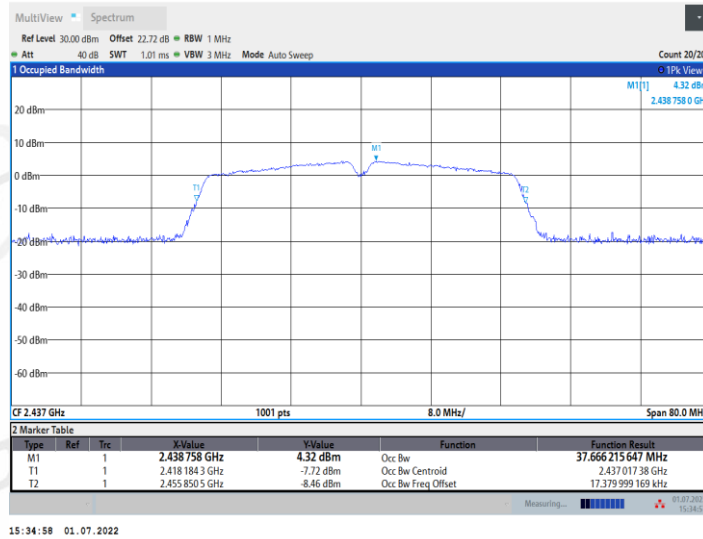


11N40MIMO\_Ant2\_2437

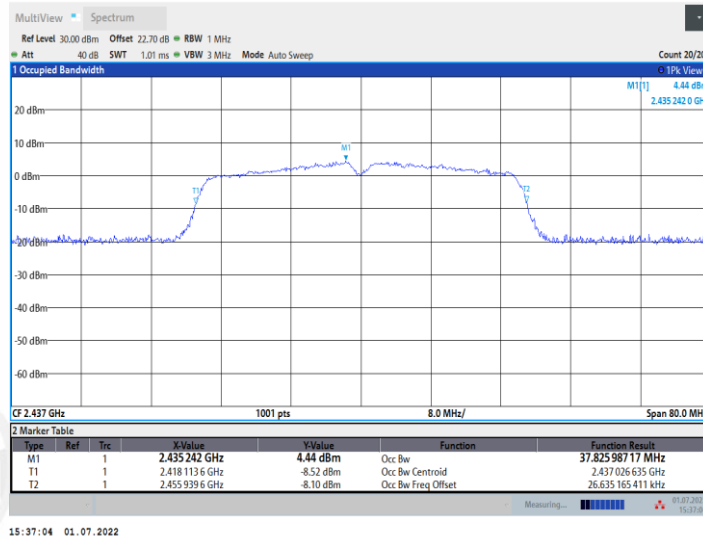


11N40MIMO\_Ant1\_2452

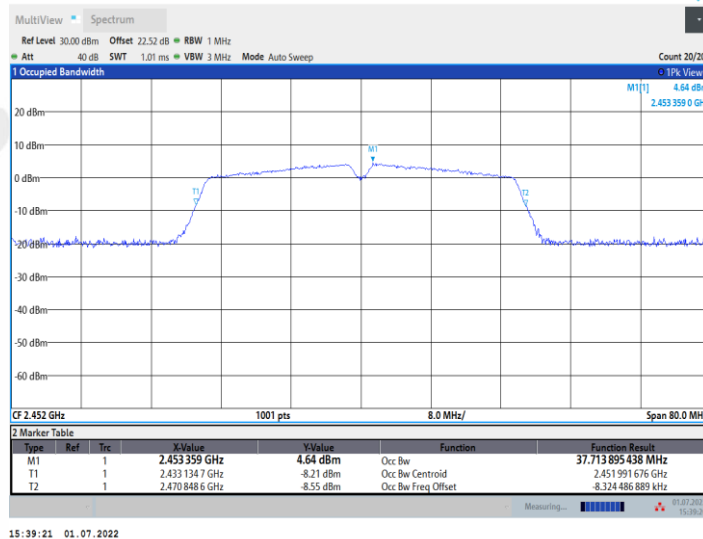


11N40MIMO\_Ant2\_2452

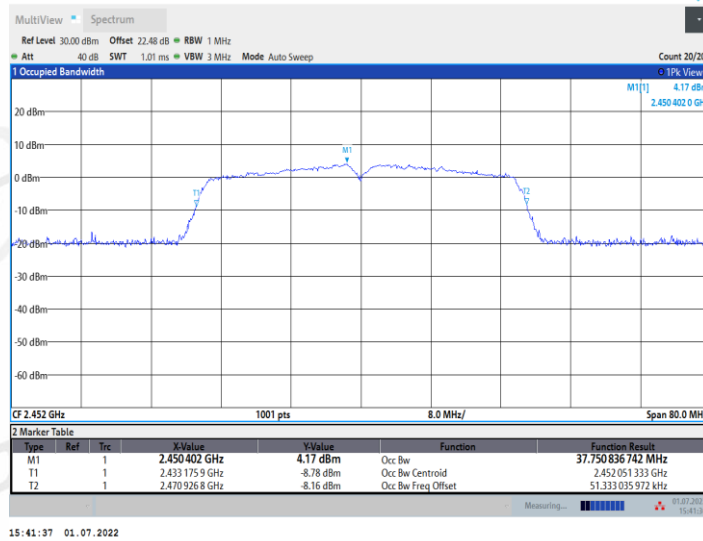


11AX20MIMO\_Ant1\_2412

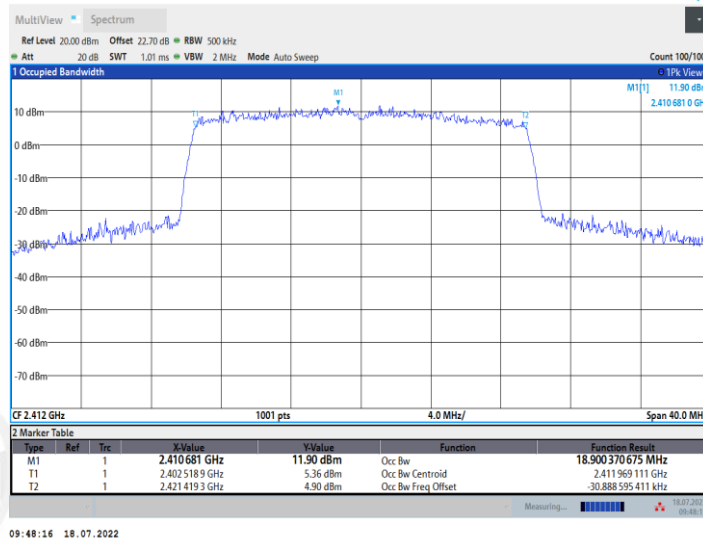


11AX20MIMO\_Ant2\_2412

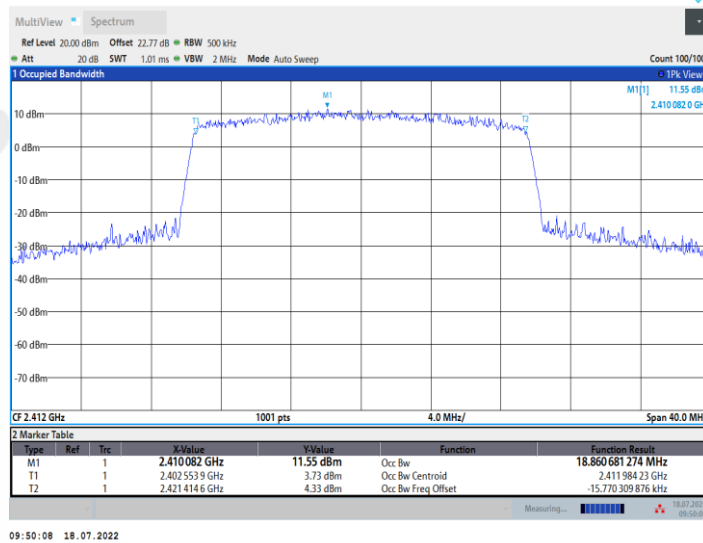


11AX20MIMO\_Ant1\_2437

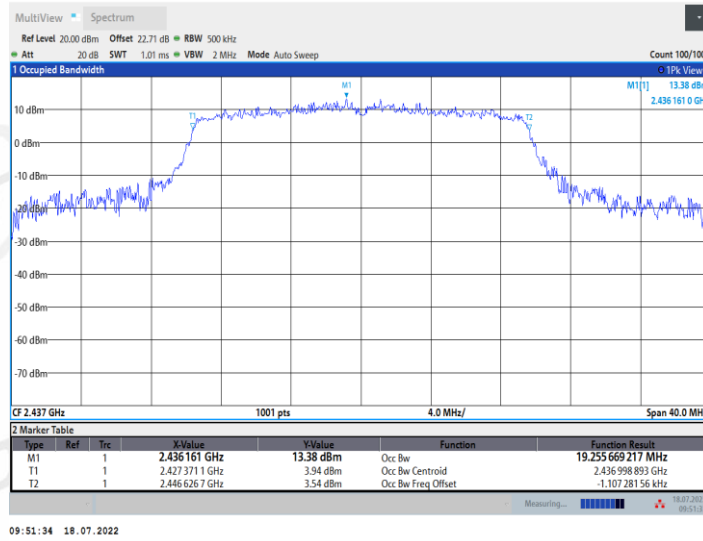


11AX20MIMO\_Ant2\_2437

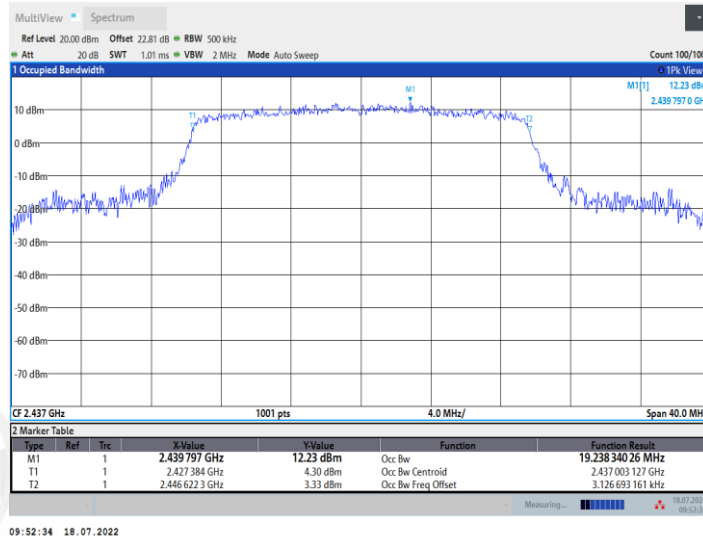


11AX20MIMO\_Ant1\_2462

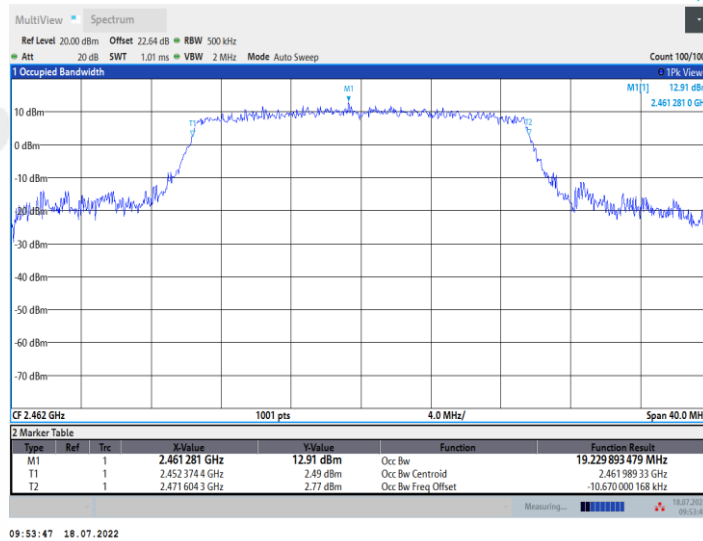


11AX20MIMO\_Ant2\_2462

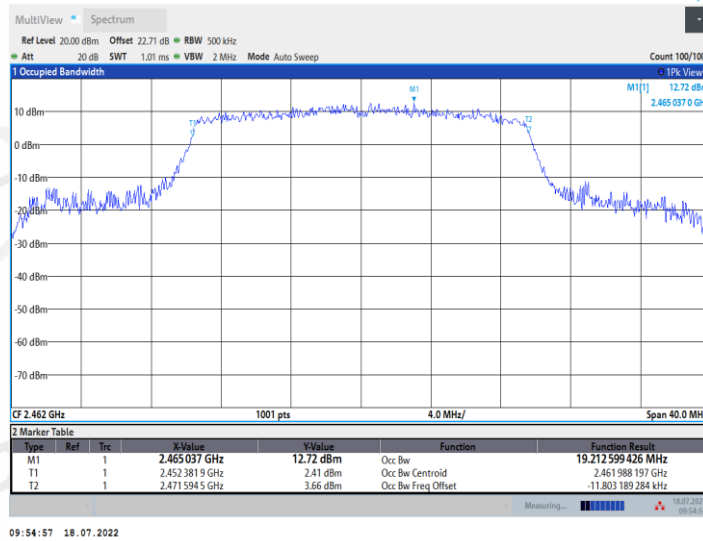


11AX40MIMO\_Ant1\_2422

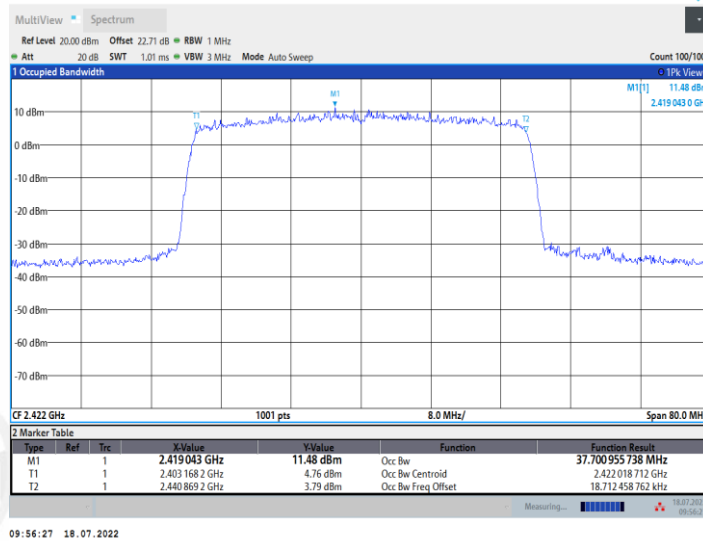


11AX40MIMO\_Ant2\_2422

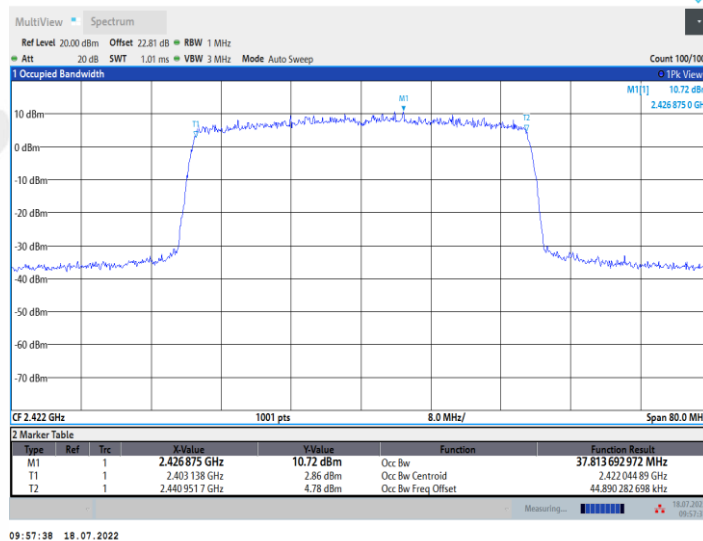


11AX40MIMO\_Ant1\_2437

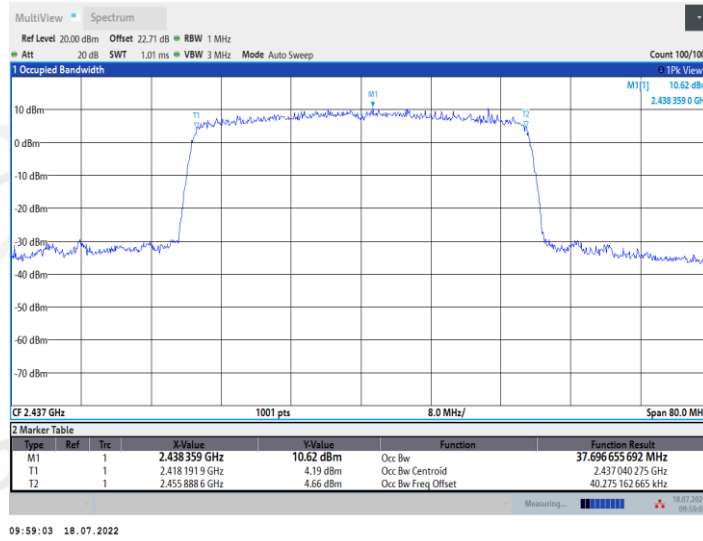


11AX40MIMO\_Ant2\_2437

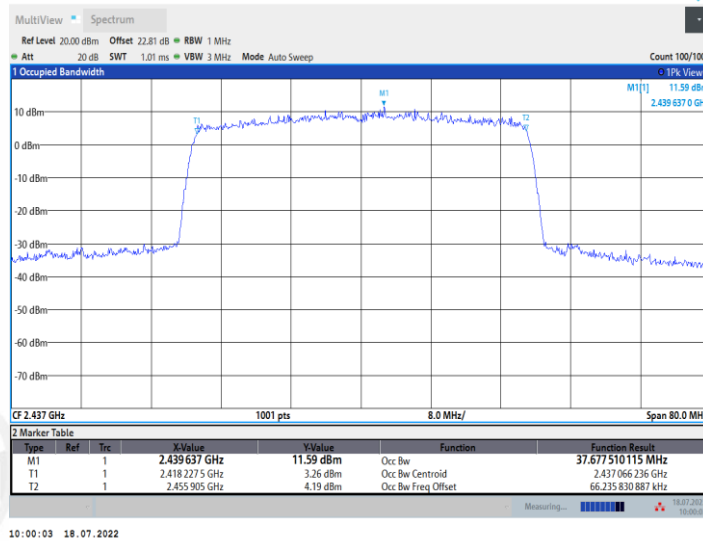

11AX40MIMO\_Ant1\_2452

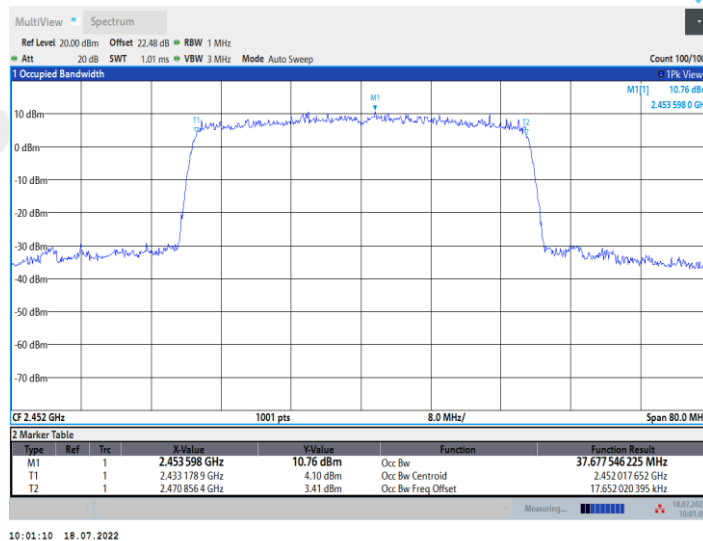

11AX40MIMO\_Ant2\_2452

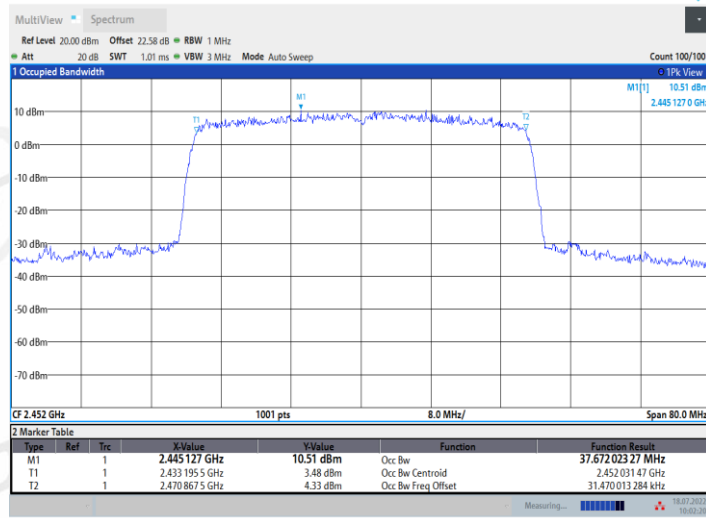

10:02:21 18.07.2022

## 5. Conducted Peak Output Power

### 5.1. Block diagram of test setup

Same as section 4.1

### 5.2. Limits

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the PK output power of each antenna port by power meter.

### 5.4. Test result

Test Mode	Test Channel	Ant	Conducted Output Power (dBm)	Limit [dBm]	EIRP (dBm)	Limit [dBm]	Verdict
11B	2412	ANT1	17.53	30	20.21	36	Pass
11B	2412	ANT2	17.10	30	18.68	36	Pass
11B	2437	ANT1	17.57	30	20.25	36	Pass
11B	2437	ANT2	17.06	30	18.64	36	Pass
11B	2462	ANT1	17.52	30	20.20	36	Pass
11B	2462	ANT2	17.06	30	18.64	36	Pass
11G	2412	ANT1	15.31	30	17.99	36	Pass
11G	2412	ANT2	14.58	30	16.16	36	Pass
11G	2437	ANT1	15.36	30	18.04	36	Pass
11G	2437	ANT2	14.85	30	16.43	36	Pass
11G	2462	ANT1	15.65	30	18.33	36	Pass
11G	2462	ANT2	14.94	30	16.52	36	Pass
11N20MIMO	2412	ANT1	13.22	30	15.90	36	Pass
11N20MIMO	2412	ANT2	12.73	30	14.31	36	Pass
11N20MIMO	2412	total	15.99	30	18.19	36	Pass
11N20MIMO	2437	ANT1	13.35	30	16.03	36	Pass
11N20MIMO	2437	ANT2	13.03	30	14.61	36	Pass
11N20MIMO	2437	total	16.20	30	18.39	36	Pass
11N20MIMO	2462	ANT1	13.62	30	16.30	36	Pass
11N20MIMO	2462	ANT2	13.05	30	14.63	36	Pass



11N20MIMO	2462	total	16.35	30	18.56	36	Pass
11N40MIMO	2422	ANT1	10.10	30	12.78	36	Pass
11N40MIMO	2422	ANT2	9.61	30	11.19	36	Pass
11N40MIMO	2422	total	12.87	30	15.07	36	Pass
11N40MIMO	2437	ANT1	10.03	30	12.71	36	Pass
11N40MIMO	2437	ANT2	9.53	30	11.11	36	Pass
11N40MIMO	2437	total	12.80	30	14.99	36	Pass
11N40MIMO	2452	ANT1	10.10	30	12.78	36	Pass
11N40MIMO	2452	ANT2	9.51	30	11.09	36	Pass
11N40MIMO	2452	total	12.83	30	15.03	36	Pass
11AX20SU	2412	ANT1	14.55	30	17.23	36	Pass
11AX20SU	2412	ANT2	14.52	30	16.10	36	Pass
11AX20SU	2412	total	17.55	30	19.71	36	Pass
11AX20SU	2437	ANT1	14.57	30	17.25	36	Pass
11AX20SU	2437	ANT2	14.53	30	16.11	36	Pass
11AX20SU	2437	total	17.56	30	19.73	36	Pass
11AX20SU	2462	ANT1	14.34	30	17.02	36	Pass
11AX20SU	2462	ANT2	14.29	30	15.87	36	Pass
11AX20SU	2462	total	17.33	30	19.49	36	Pass
11AX40SU	2422	ANT1	11.88	30	14.56	36	Pass
11AX40SU	2422	ANT2	11.91	30	13.49	36	Pass
11AX40SU	2422	total	14.91	30	17.07	36	Pass
11AX40SU	2437	ANT1	11.99	30	14.67	36	Pass
11AX40SU	2437	ANT2	11.91	30	13.49	36	Pass
11AX40SU	2437	total	14.96	30	17.13	36	Pass
11AX40SU	2452	ANT1	12.25	30	14.93	36	Pass
11AX40SU	2452	ANT2	11.80	30	13.38	36	Pass
11AX40SU	2452	total	15.04	30	17.72	36	Pass



Test Mode	Antenna	Channel	Ru Size	Ru Index	Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20 MIMO	Ant1	2412	26Tone	RU0	11.20	30	13.88	36	PASS
				RU4	11.43	30	14.11	36	PASS
				RU8	11.31	30	13.99	36	PASS
			52Tone	RU37	10.62	30	13.30	36	PASS
				RU38	10.52	30	13.20	36	PASS
				RU39	10.82	30	13.50	36	PASS
			106Tone	RU40	10.91	30	13.59	36	PASS
				RU53	11.81	30	14.49	36	PASS
				RU54	11.44	30	14.12	36	PASS
	Ant2	2412	26Tone	RU0	11.03	30	12.61	36	PASS
				RU4	11.20	30	12.78	36	PASS
				RU8	10.99	30	12.57	36	PASS
			52Tone	RU37	10.39	30	11.97	36	PASS
				RU38	10.46	30	12.04	36	PASS
				RU39	10.43	30	12.01	36	PASS
			106Tone	RU40	10.34	30	11.92	36	PASS
				RU53	13.55	30	15.13	36	PASS
				RU54	11.19	30	12.77	36	PASS
	total	2412	26Tone	RU0	14.13	30	16.30	36	PASS
				RU4	14.33	30	16.51	36	PASS
				RU8	14.16	30	16.35	36	PASS
			52Tone	RU37	13.52	30	15.70	36	PASS
				RU38	13.50	30	15.67	36	PASS
				RU39	13.64	30	15.83	36	PASS
			106Tone	RU40	13.64	30	15.85	36	PASS
				RU53	15.78	30	17.83	36	PASS
				RU54	14.33	30	16.51	36	PASS
	Ant1	2437	26Tone	RU0	11.42	30	14.10	36	PASS
				RU4	11.53	30	14.21	36	PASS
				RU8	11.48	30	14.16	36	PASS
			52Tone	RU37	10.79	30	13.47	36	PASS
				RU38	10.73	30	13.41	36	PASS
				RU39	10.86	30	13.54	36	PASS
			106Tone	RU40	10.68	30	13.36	36	PASS
				RU53	10.98	30	13.66	36	PASS
				RU54	11.32	30	14.00	36	PASS
	Ant2	2437	26Tone	RU0	10.83	30	12.41	36	PASS
				RU4	11.27	30	12.85	36	PASS
				RU8	11.22	30	12.80	36	PASS
			52Tone	RU37	10.26	30	11.84	36	PASS
				RU38	10.37	30	11.95	36	PASS
				RU39	10.47	30	12.05	36	PASS
106Tone			RU40	10.60	30	12.18	36	PASS	
			RU53	10.72	30	12.30	36	PASS	
			RU54	11.00	30	12.58	36	PASS	
total	2437	26Tone	RU0	14.15	30	16.35	36	PASS	
			RU4	14.41	30	16.59	36	PASS	

			52Tone	RU8	14.36	30	16.54	36	PASS
				RU37	13.54	30	15.74	36	PASS
				RU38	13.56	30	15.75	36	PASS
				RU39	13.68	30	15.87	36	PASS
			106Tone	RU40	13.65	30	15.82	36	PASS
				RU53	13.86	30	16.04	36	PASS
				RU54	14.17	30	16.36	36	PASS
				RU0	11.48	30	14.16	36	PASS
	Ant1	2462	26Tone	RU4	11.76	30	14.44	36	PASS
				RU8	11.53	30	14.21	36	PASS
				RU37	10.76	30	13.44	36	PASS
			52Tone	RU38	10.93	30	13.61	36	PASS
				RU39	10.93	30	13.61	36	PASS
				RU40	10.90	30	13.58	36	PASS
			106Tone	RU53	11.32	30	14.00	36	PASS
				RU54	11.38	30	14.06	36	PASS
	Ant2	2462	26Tone	RU0	11.39	30	12.97	36	PASS
				RU4	11.57	30	13.15	36	PASS
				RU8	11.25	30	12.83	36	PASS
			52Tone	RU37	10.86	30	12.44	36	PASS
				RU38	10.76	30	12.34	36	PASS
				RU39	10.75	30	12.33	36	PASS
			106Tone	RU40	10.55	30	12.13	36	PASS
				RU53	11.18	30	12.76	36	PASS
RU54	11.16	30	12.74	36	PASS				
	total	2462	26Tone	RU0	14.45	30	16.62	36	PASS
RU4				14.68	30	16.85	36	PASS	
RU8				14.40	30	16.58	36	PASS	
52Tone			RU37	13.82	30	15.98	36	PASS	
			RU38	13.86	30	16.03	36	PASS	
			RU39	13.85	30	16.03	36	PASS	
106Tone			RU40	13.74	30	15.93	36	PASS	
			RU53	14.26	30	16.43	36	PASS	
RU54	14.28	30	16.46	36	PASS				
11AX40 MIMO	Ant1	2422	242Tone	RU61	11.87	30	14.55	36	PASS
				RU62	11.93	30	14.61	36	PASS
	Ant2	2422	242Tone	RU61	11.83	30	13.41	36	PASS
				RU62	11.67	30	13.25	36	PASS
	total	2422	242Tone	RU61	14.86	30	17.03	36	PASS
				RU62	14.81	30	16.99	36	PASS
	Ant1	2437	242Tone	RU61	12.08	30	14.76	36	PASS
				RU62	12.03	30	14.71	36	PASS
	Ant2	2437	242Tone	RU61	11.47	30	13.05	36	PASS
				RU62	11.51	30	13.09	36	PASS
	total	2437	242Tone	RU61	14.80	30	17.00	36	PASS
				RU62	14.79	30	16.99	36	PASS
	Ant1	2452	242Tone	RU61	11.85	30	14.53	36	PASS
				RU62	12.08	30	14.76	36	PASS
	Ant2	2452	242Tone	RU61	11.52	30	13.10	36	PASS
				RU62	11.74	30	13.32	36	PASS
	total	2452	242Tone	RU61	14.70	30	16.88	36	PASS

				RU62	14.92	30	17.11	36	PASS
--	--	--	--	------	-------	----	-------	----	------

Note 1: EIRP (dBm)=Conducted Output Power (dBm)+ Antenna Gain (dBi)

Note 2: HE20 SU represents HE20 242Tone, and HE40 SU represents HE40 484Tone, so for these Tones test performed with SU mode.

## 6. Power Spectral Density

### 6.1. Block diagram of test setup

Same as section 4.1

### 6.2. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 6.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Set the spectrum analyzer as follows:

Center frequency	DTS Channel center frequency
RBW:	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW:	$\geq 3\text{RBW}$
Span	1.5 times the DTS bandwidth
Detector Mode:	RMS
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.

(4) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.4. Test result

Test Mode	Test Channel	Ant	PSD [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11B	2412	ANT1	-13.97	8.00	Pass
11B	2412	ANT2	-12.97	8.00	Pass
11B	2437	ANT1	-13.38	8.00	Pass
11B	2437	ANT2	-14.17	8.00	Pass
11B	2462	ANT1	-13.51	8.00	Pass
11B	2462	ANT2	-14.18	8.00	Pass
11G	2412	ANT1	-16.41	8.00	Pass
11G	2412	ANT2	-17.32	8.00	Pass
11G	2437	ANT1	-16.22	8.00	Pass
11G	2437	ANT2	-16.52	8.00	Pass
11G	2462	ANT1	-15.68	8.00	Pass
11G	2462	ANT2	-16.53	8.00	Pass

11N20MIMO	2412	ANT1	-19.09	8.00	Pass
11N20MIMO	2412	ANT2	-18.62	8.00	Pass
11N20MIMO	2412	total	-15.84	8.00	Pass
11N20MIMO	2437	ANT1	-18.11	8.00	Pass
11N20MIMO	2437	ANT2	-18.84	8.00	Pass
11N20MIMO	2437	total	-15.45	8.00	Pass
11N20MIMO	2462	ANT1	-17.68	8.00	Pass
11N20MIMO	2462	ANT2	-19.1	8.00	Pass
11N20MIMO	2462	total	-15.32	8.00	Pass
11N40MIMO	2422	ANT1	-23.59	8.00	Pass
11N40MIMO	2422	ANT2	-25.45	8.00	Pass
11N40MIMO	2422	total	-21.41	8.00	Pass
11N40MIMO	2437	ANT1	-23.97	8.00	Pass
11N40MIMO	2437	ANT2	-24.88	8.00	Pass
11N40MIMO	2437	total	-21.39	8.00	Pass
11N40MIMO	2452	ANT1	-23.88	8.00	Pass
11N40MIMO	2452	ANT2	-25.09	8.00	Pass
11N40MIMO	2452	total	-21.43	8.00	Pass
11AX20SU	2412	ANT1	-16.3	8.00	Pass
11AX20SU	2412	ANT2	-16.17	8.00	Pass
11AX20SU	2412	total	-13.22	8.00	Pass
11AX20SU	2437	ANT1	-15.42	8.00	Pass
11AX20SU	2437	ANT2	-15.21	8.00	Pass
11AX20SU	2437	total	-12.30	8.00	Pass
11AX20SU	2462	ANT1	-15.07	8.00	Pass
11AX20SU	2462	ANT2	-15.56	8.00	Pass
11AX20SU	2462	total	-12.30	8.00	Pass
11AX40SU	2422	ANT1	-18.52	8.00	Pass
11AX40SU	2422	ANT2	-20.09	8.00	Pass
11AX40SU	2422	total	-16.22	8.00	Pass
11AX40SU	2437	ANT1	-18.68	8.00	Pass
11AX40SU	2437	ANT2	-19.19	8.00	Pass
11AX40SU	2437	total	-15.92	8.00	Pass
11AX40SU	2452	ANT1	-19.13	8.00	Pass
11AX40SU	2452	ANT2	-19.25	8.00	Pass
11AX40SU	2452	total	-16.18	8.00	Pass





Test Mode	Antenna	Channel	Ru Size	Ru Index	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict		
11AX20 MIMO	Ant1	2412	26Tone	RU0	-7.17	≤8.00	PASS		
				RU4	-6.12	≤8.00	PASS		
				RU8	-6.12	≤8.00	PASS		
			52Tone	RU37	-8.48	≤8.00	PASS		
				RU38	-12.38	≤8.00	PASS		
				RU39	-8.5	≤8.00	PASS		
				RU40	-10.49	≤8.00	PASS		
			106Tone	RU53	-11.87	≤8.00	PASS		
				RU54	-13.32	≤8.00	PASS		
			Ant2	2412	26Tone	RU0	-8.39	≤8.00	PASS
						RU4	-8.09	≤8.00	PASS
						RU8	-6.12	≤8.00	PASS
	52Tone	RU37			-8.22	≤8.00	PASS		
		RU38			-12.78	≤8.00	PASS		
		RU39			-8.11	≤8.00	PASS		
		RU40			-8.99	≤8.00	PASS		
	106Tone	RU53			-15.49	≤8.00	PASS		
		RU54			-13.33	≤8.00	PASS		
	total	2412			26Tone	RU0	-4.73	≤8.00	PASS
						RU4	-3.98	≤8.00	PASS
						RU8	-3.11	≤8.00	PASS
			52Tone	RU37	-5.34	≤8.00	PASS		
				RU38	-9.57	≤8.00	PASS		
				RU39	-5.29	≤8.00	PASS		
				RU40	-6.67	≤8.00	PASS		
			106Tone	RU53	-10.3	≤8.00	PASS		
				RU54	-10.31	≤8.00	PASS		
			Ant1	2437	26Tone	RU0	-6.79	≤8.00	PASS
						RU4	-7.57	≤8.00	PASS
						RU8	-9.7	≤8.00	PASS
	52Tone	RU37			-7.79	≤8.00	PASS		
		RU38			-9.11	≤8.00	PASS		
		RU39			-7.89	≤8.00	PASS		
		RU40			-7.62	≤8.00	PASS		
	106Tone	RU53			-13.33	≤8.00	PASS		
		RU54			-12.94	≤8.00	PASS		
	Ant2	2437			26Tone	RU0	-6.29	≤8.00	PASS
						RU4	-9.64	≤8.00	PASS
						RU8	-8.77	≤8.00	PASS
			52Tone	RU37	-8.53	≤8.00	PASS		
				RU38	-14.71	≤8.00	PASS		
				RU39	-17.65	≤8.00	PASS		
				RU40	-7.51	≤8.00	PASS		
			106Tone	RU53	-12.3	≤8.00	PASS		
				RU54	-14.23	≤8.00	PASS		
			total	2437	26Tone	RU0	-3.52	≤8.00	PASS
						RU4	-5.47	≤8.00	PASS
						RU8	-6.2	≤8.00	PASS




			52Tone	RU37	-5.13	≤8.00	PASS	
				RU38	-8.05	≤8.00	PASS	
				RU39	-7.45	≤8.00	PASS	
				RU40	-4.55	≤8.00	PASS	
			106Tone	RU53	-9.77	≤8.00	PASS	
				RU54	-10.53	≤8.00	PASS	
	Ant1	2462	26Tone	RU0	-6.21	≤8.00	PASS	
				RU4	-6.4	≤8.00	PASS	
				RU8	-10.79	≤8.00	PASS	
			52Tone	RU37	-7.8	≤8.00	PASS	
				RU38	-12.41	≤8.00	PASS	
				RU39	-8.45	≤8.00	PASS	
		RU40		-8.19	≤8.00	PASS		
		106Tone	RU53	-10.6	≤8.00	PASS		
			RU54	-11.51	≤8.00	PASS		
		Ant2	2462	26Tone	RU0	-7.86	≤8.00	PASS
					RU4	-6.35	≤8.00	PASS
					RU8	-9.13	≤8.00	PASS
	52Tone			RU37	-7.24	≤8.00	PASS	
				RU38	-9.05	≤8.00	PASS	
				RU39	-7.97	≤8.00	PASS	
			RU40	-14.79	≤8.00	PASS		
	106Tone		RU53	-17.39	≤8.00	PASS		
			RU54	-12.01	≤8.00	PASS		
total	2462		26Tone	RU0	-3.95	≤8.00	PASS	
				RU4	-3.36	≤8.00	PASS	
				RU8	-6.87	≤8.00	PASS	
		52Tone	RU37	-4.5	≤8.00	PASS		
			RU38	-7.4	≤8.00	PASS		
			RU39	-5.19	≤8.00	PASS		
	RU40		-7.33	≤8.00	PASS			
	106Tone	RU53	-9.77	≤8.00	PASS			
		RU54	-8.74	≤8.00	PASS			
	11AX40 MIMO	Ant1	2422	242Tone	RU61	-15.43	≤8.00	PASS
					RU62	-16.34	≤8.00	PASS
		Ant2	2422	242Tone	RU61	-14.52	≤8.00	PASS
RU62					-9.74	≤8.00	PASS	
total		2422	242Tone	RU61	-11.94	≤8.00	PASS	
				RU62	-8.88	≤8.00	PASS	
Ant1		2437	242Tone	RU61	-13.82	≤8.00	PASS	
				RU62	-11.67	≤8.00	PASS	
Ant2		2437	242Tone	RU61	-8.41	≤8.00	PASS	
				RU62	-8.12	≤8.00	PASS	
total		2437	242Tone	RU61	-7.31	≤8.00	PASS	
				RU62	-6.53	≤8.00	PASS	
Ant1		2452	242Tone	RU61	-16.28	≤8.00	PASS	
				RU62	-9.72	≤8.00	PASS	
Ant2		2452	242Tone	RU61	-15.32	≤8.00	PASS	
				RU62	-10.11	≤8.00	PASS	
total		2452	242Tone	RU61	-12.76	≤8.00	PASS	
				RU62	-6.9	≤8.00	PASS	

### 6.5. Original test data

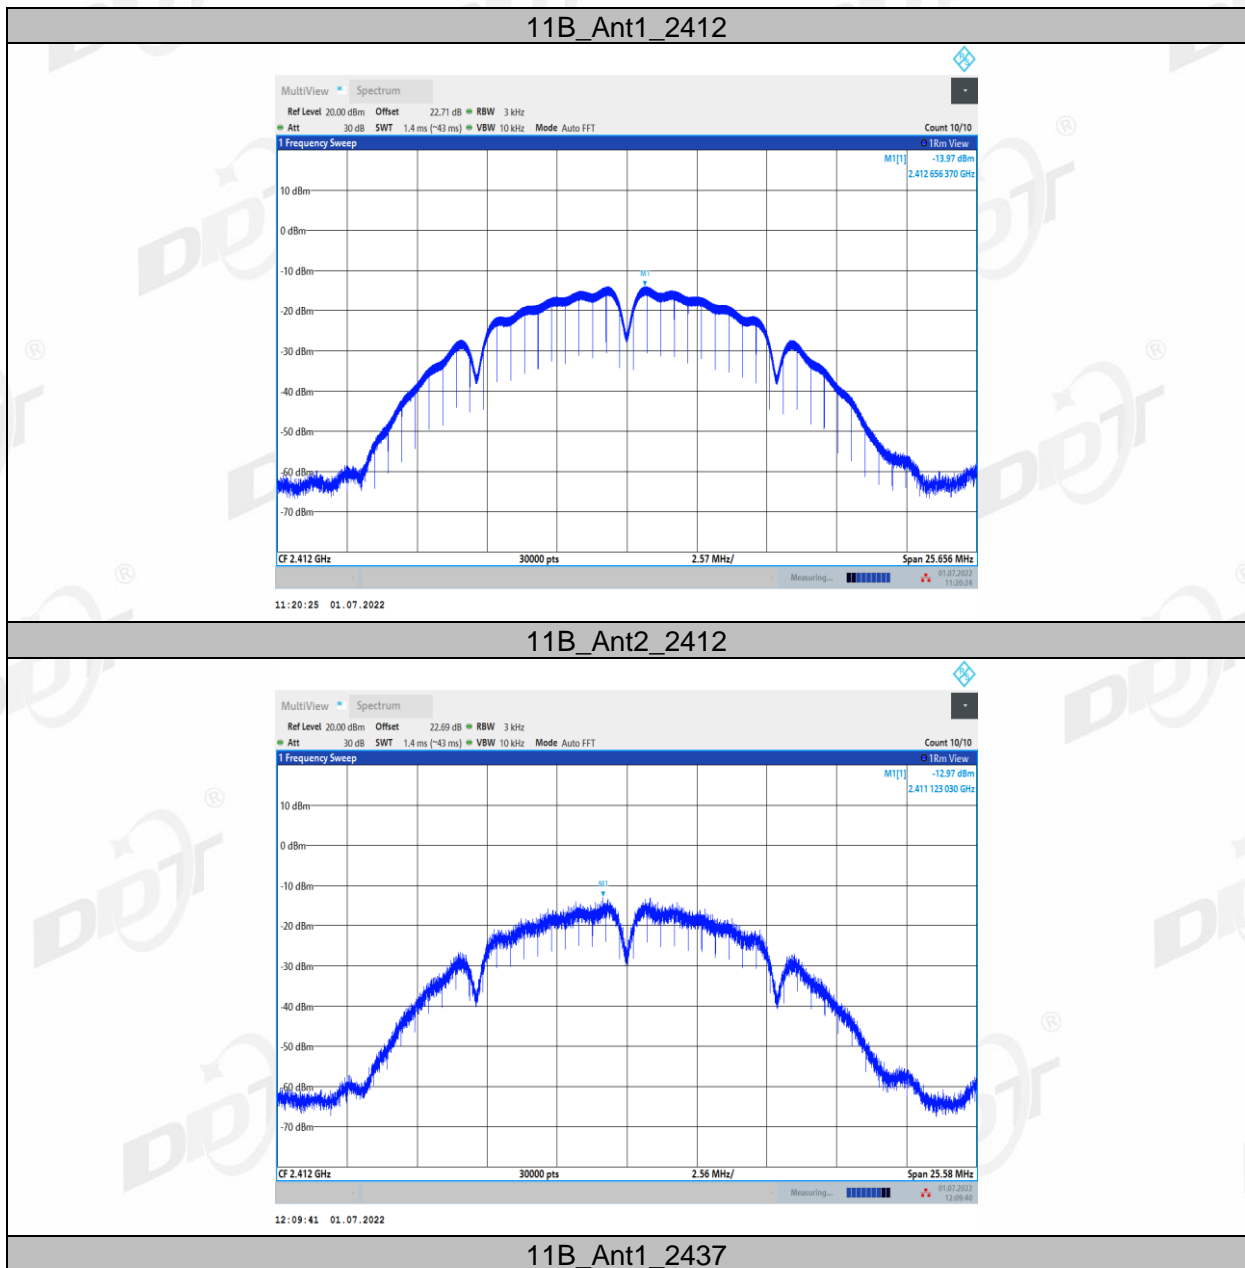


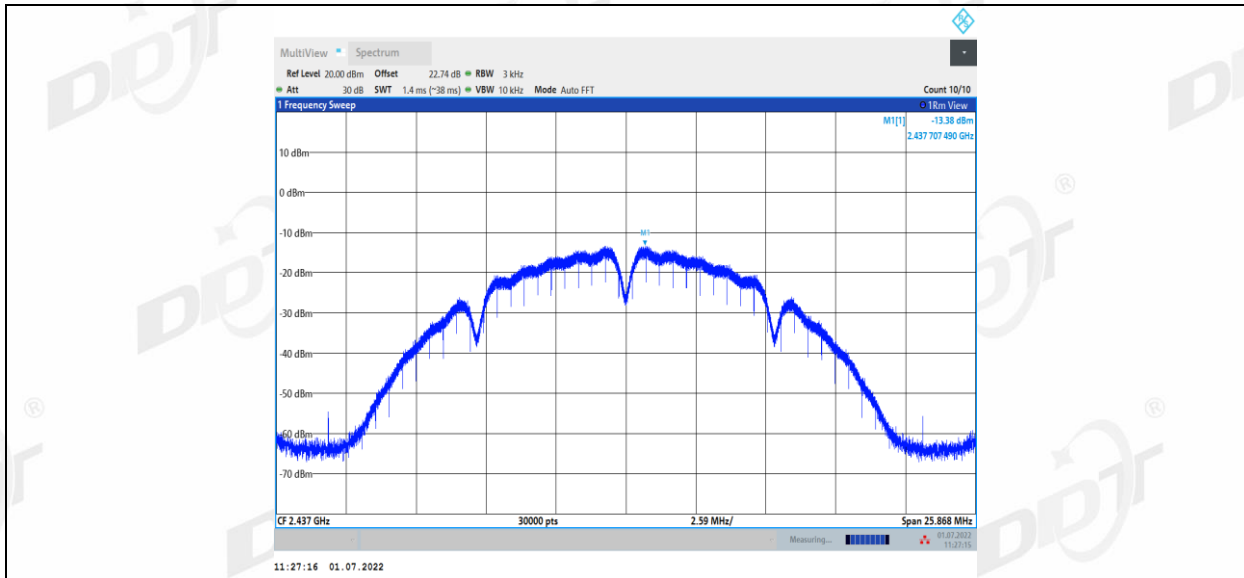


11B\_Ant2\_2437

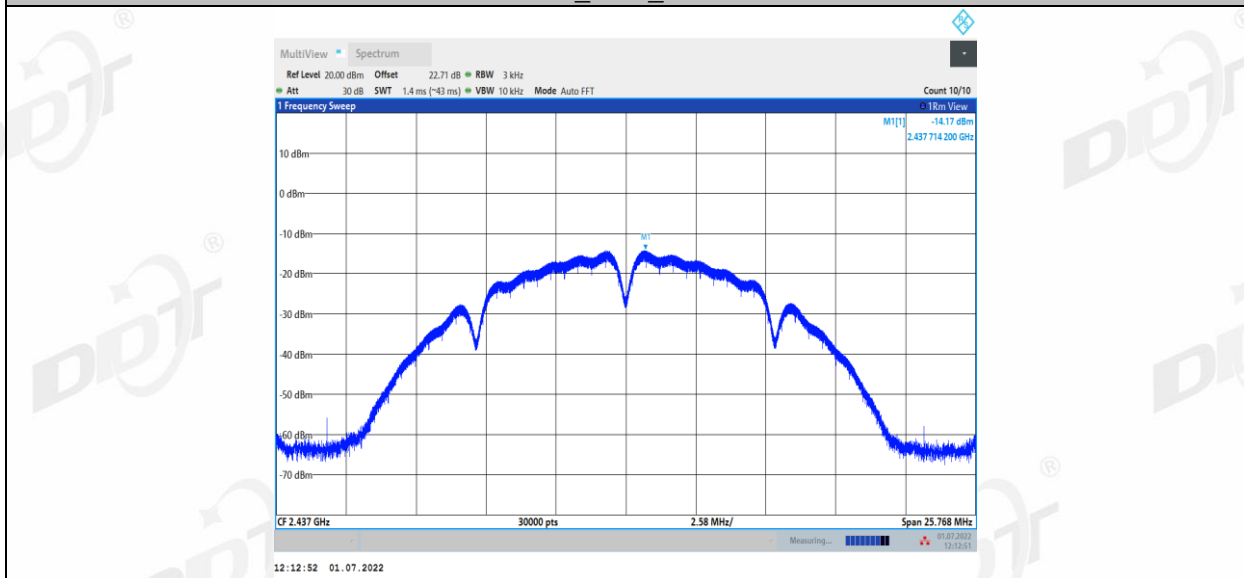


11B\_Ant1\_2462

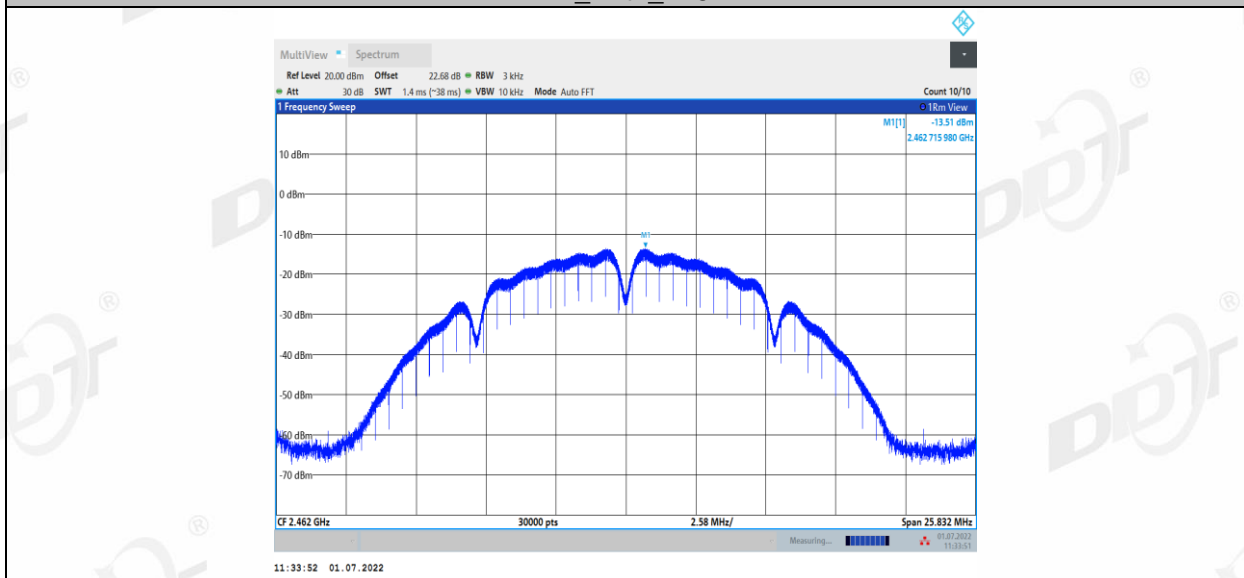


11B\_Ant2\_2462

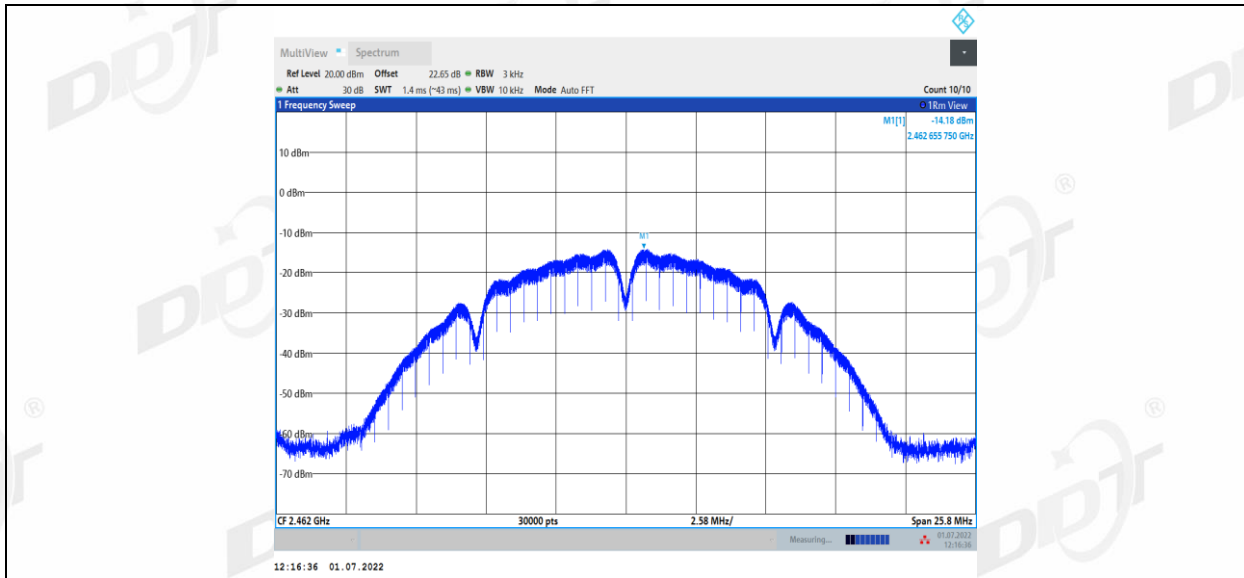


11G\_Ant1\_2412

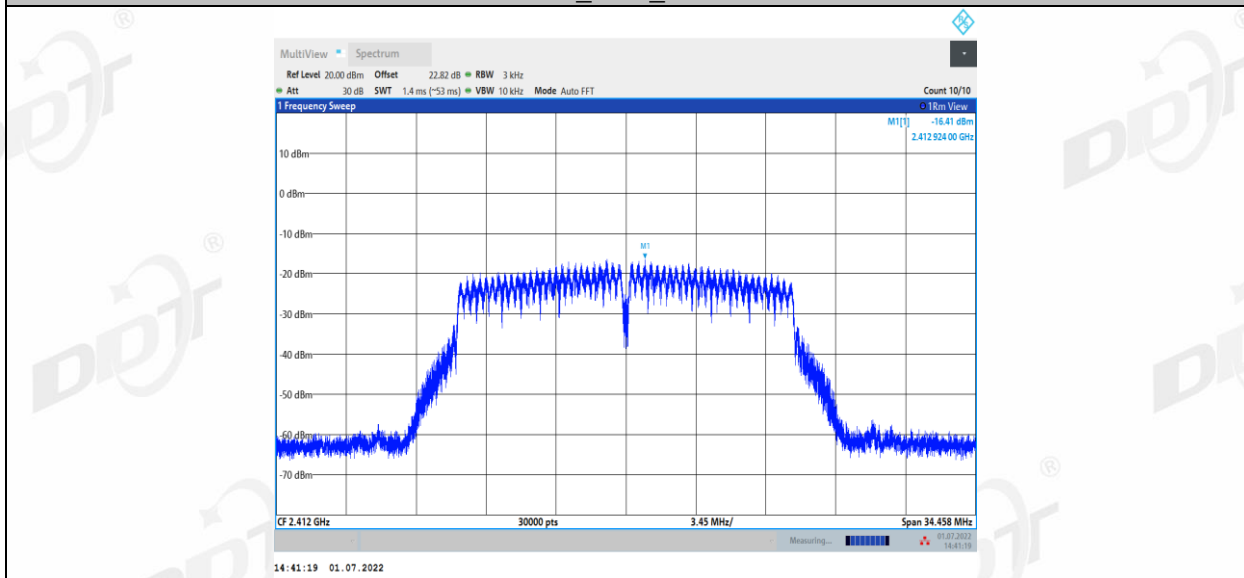


11G\_Ant2\_2412

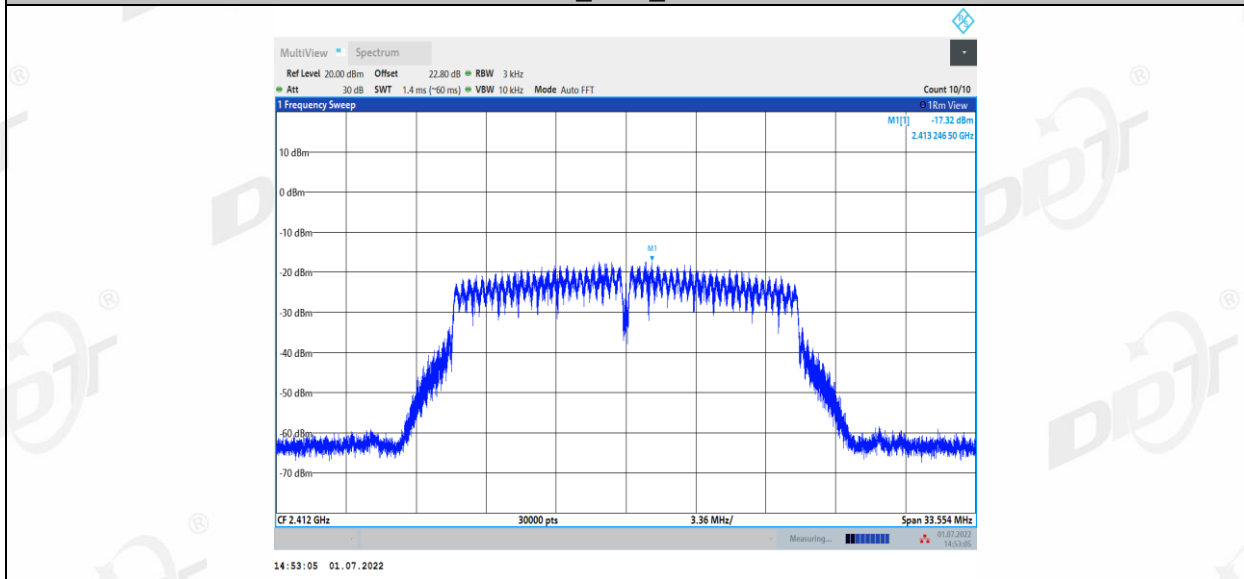


11G\_Ant1\_2437

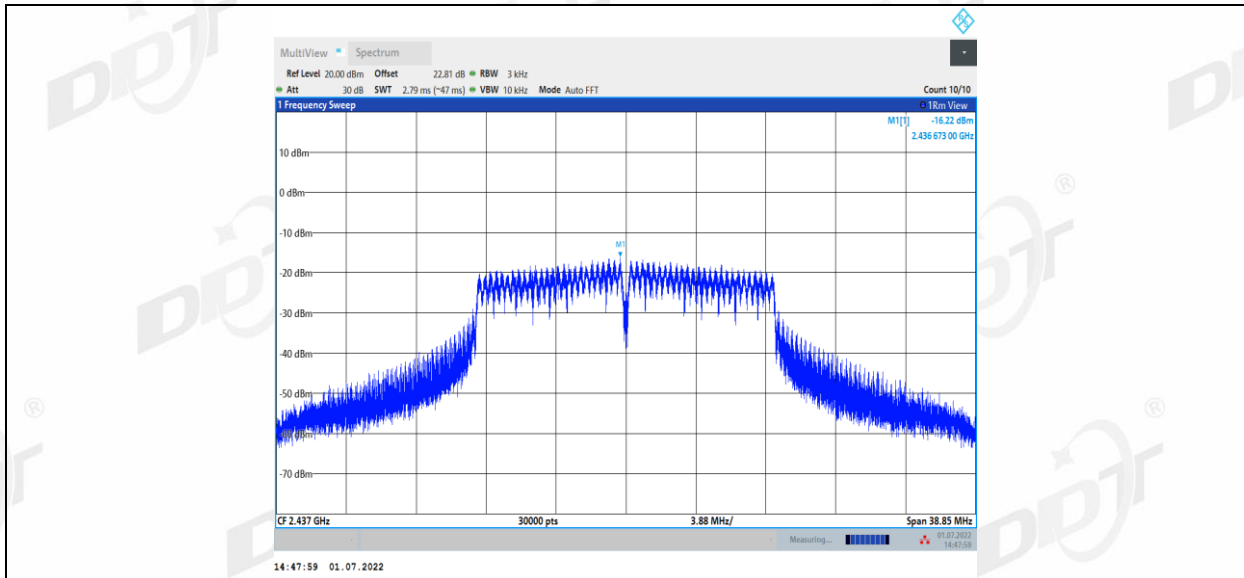


11G\_Ant2\_2437

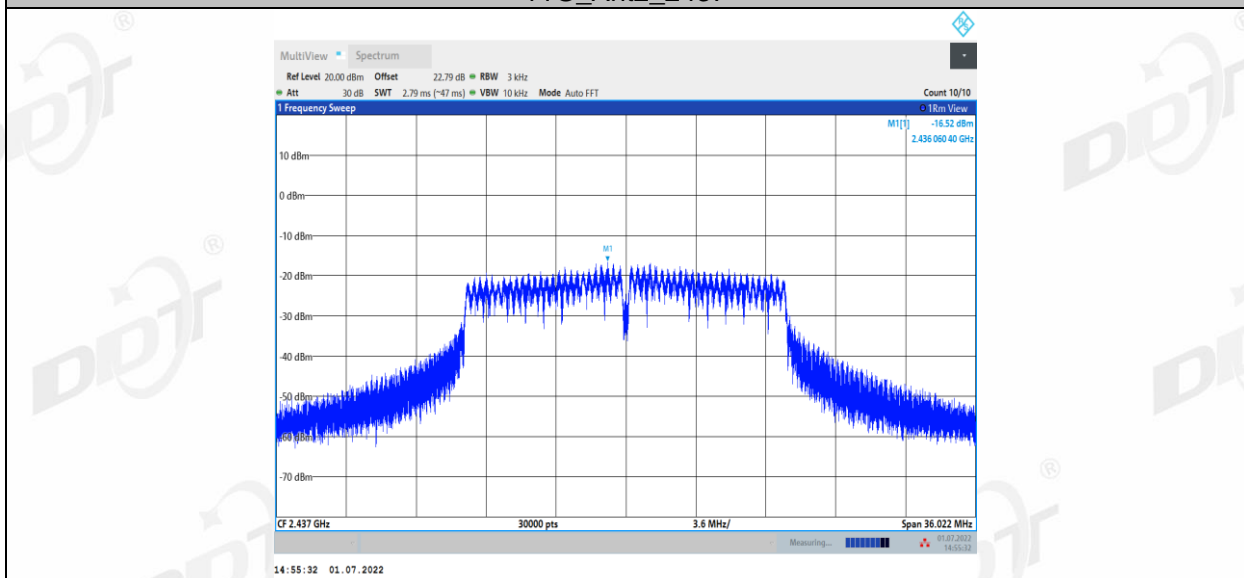


11G\_Ant1\_2462

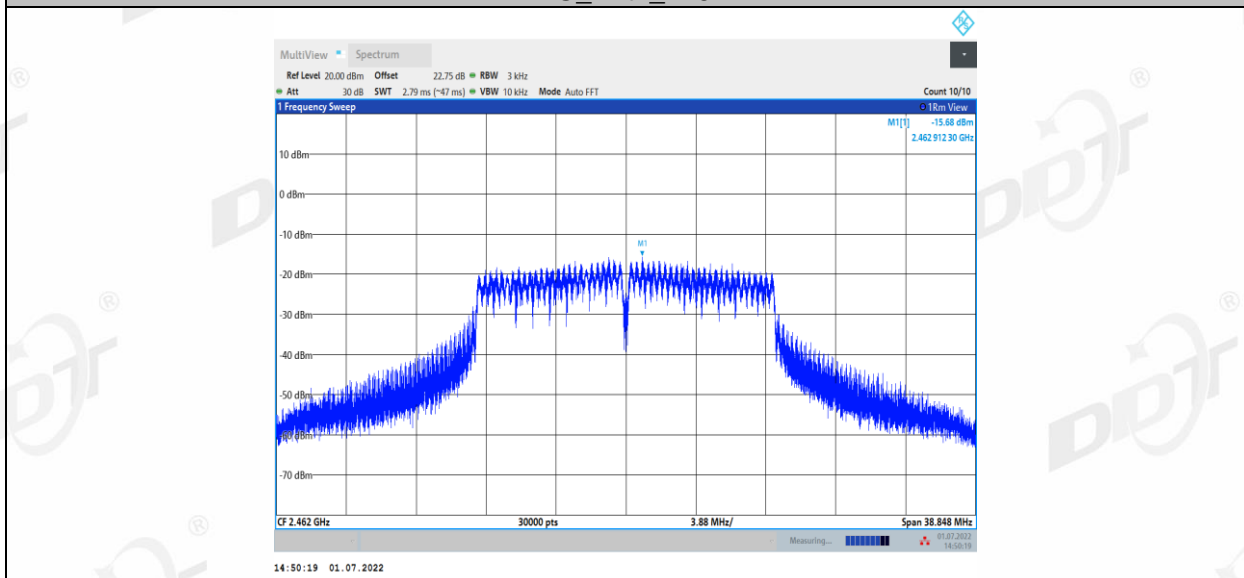


11G\_Ant2\_2462

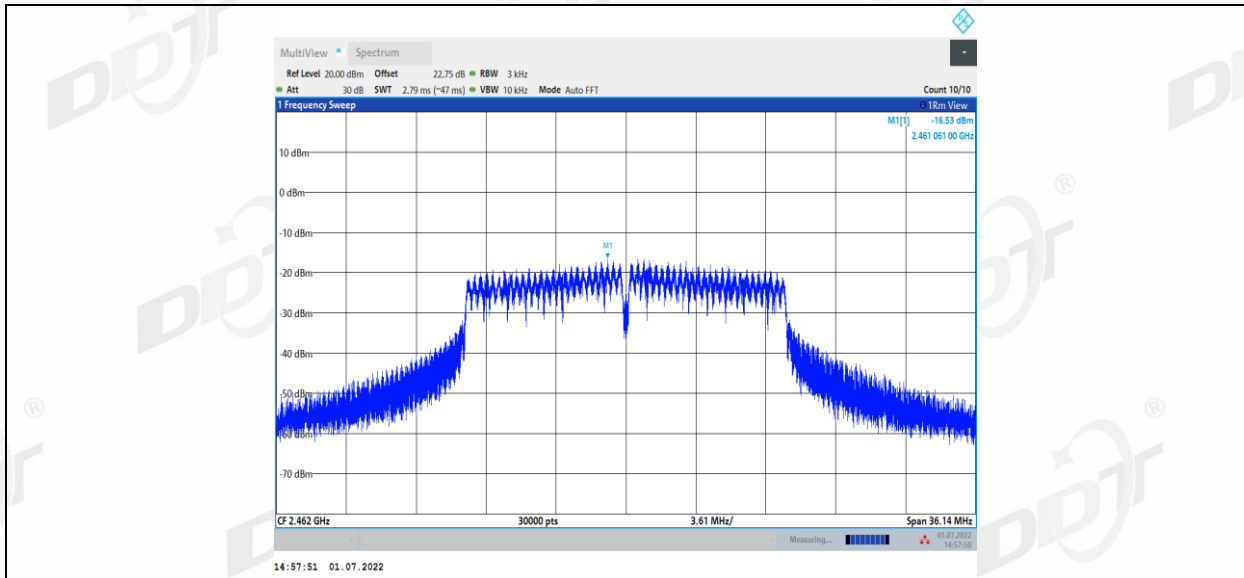

11N20MIMO\_Ant1\_2412

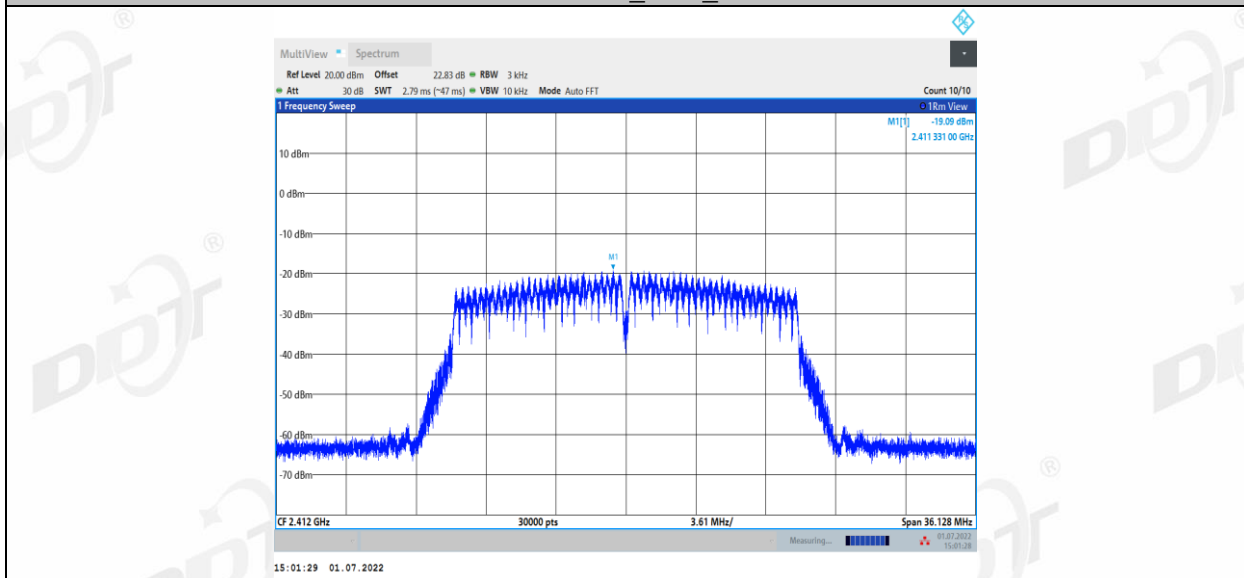


11N20MIMO\_Ant2\_2412

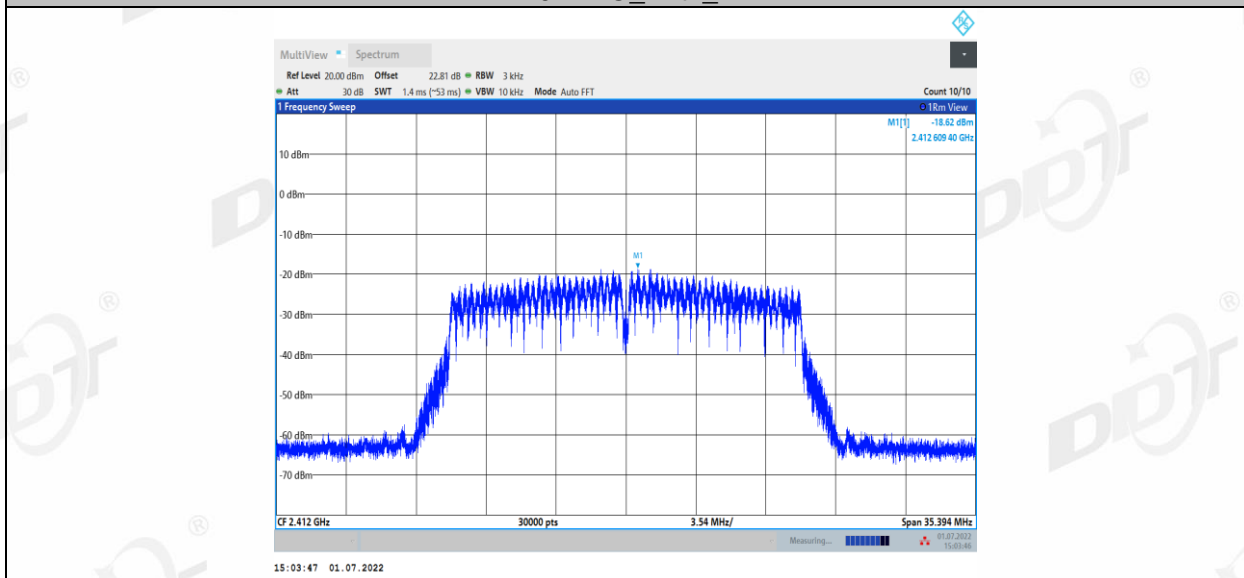


11N20MIMO\_Ant1\_2437




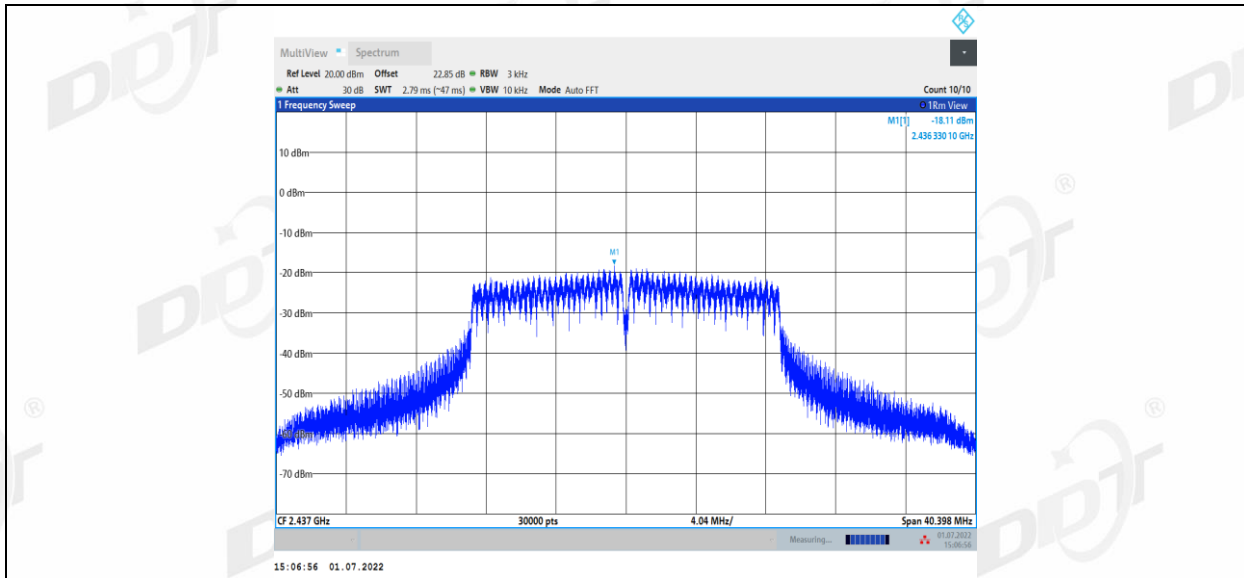


11N20MIMO\_Ant2\_2437

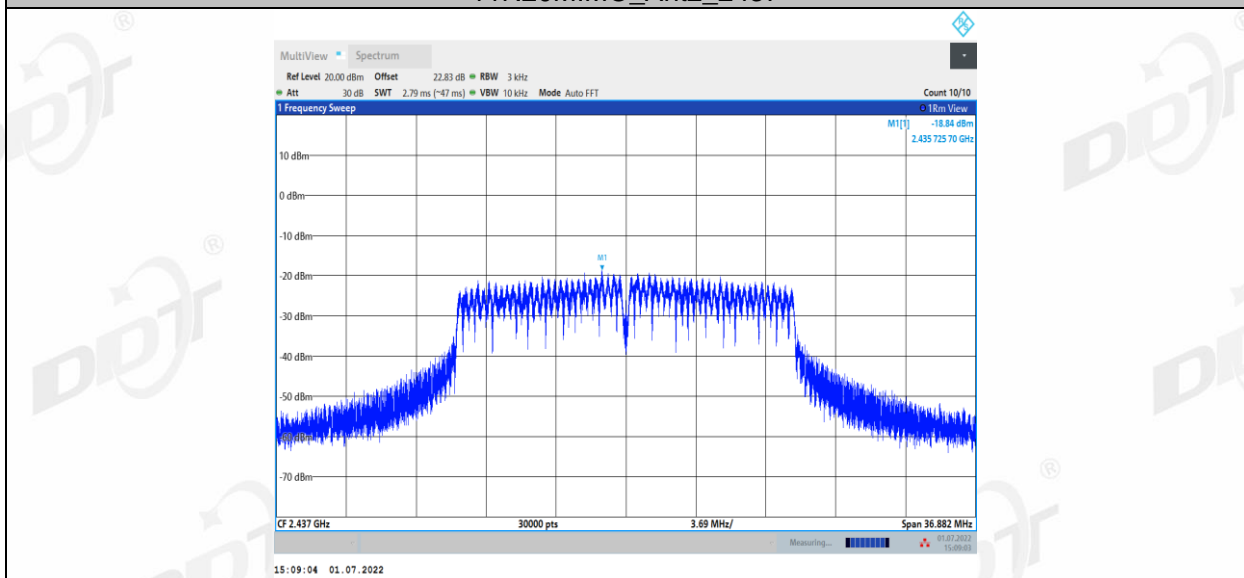


11N20MIMO\_Ant1\_2462

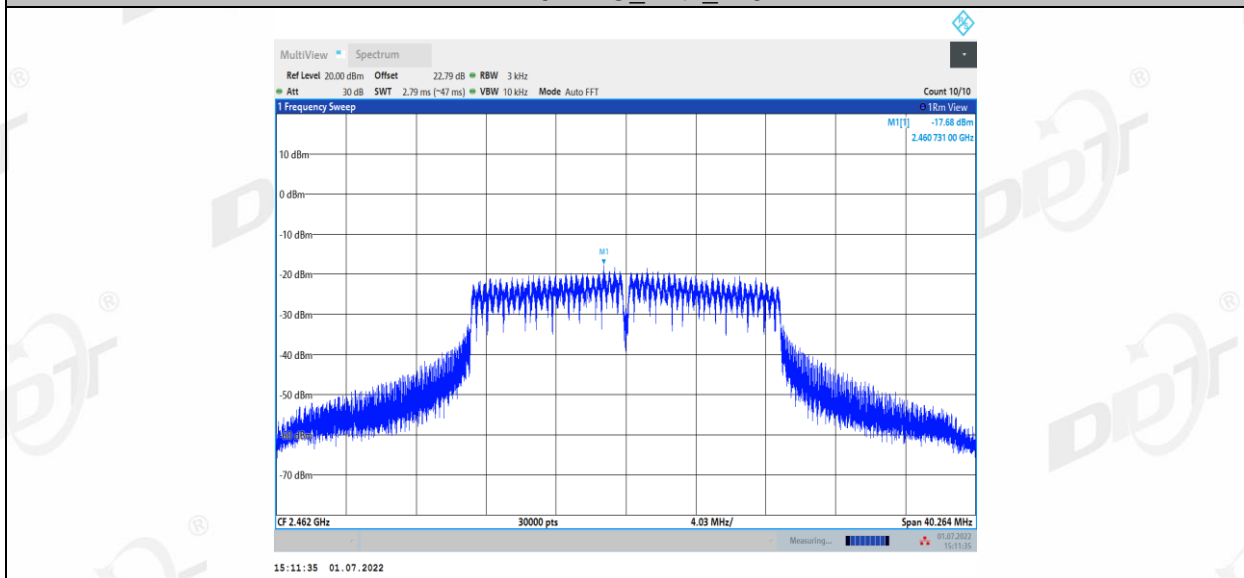


11N20MIMO\_Ant2\_2462

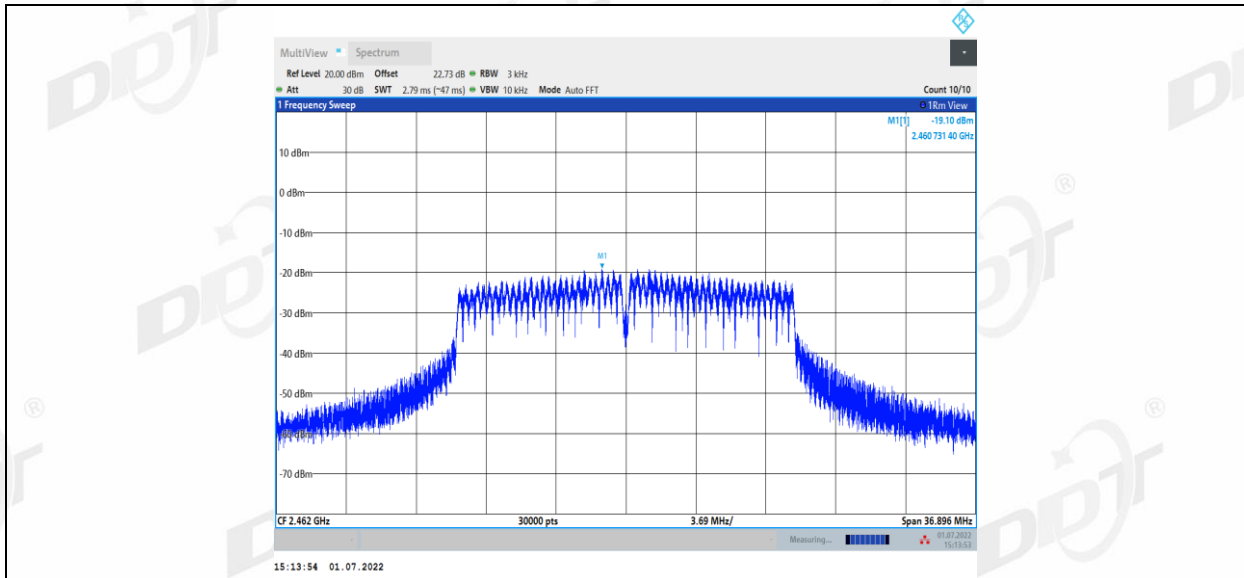


11N40MIMO\_Ant1\_2422

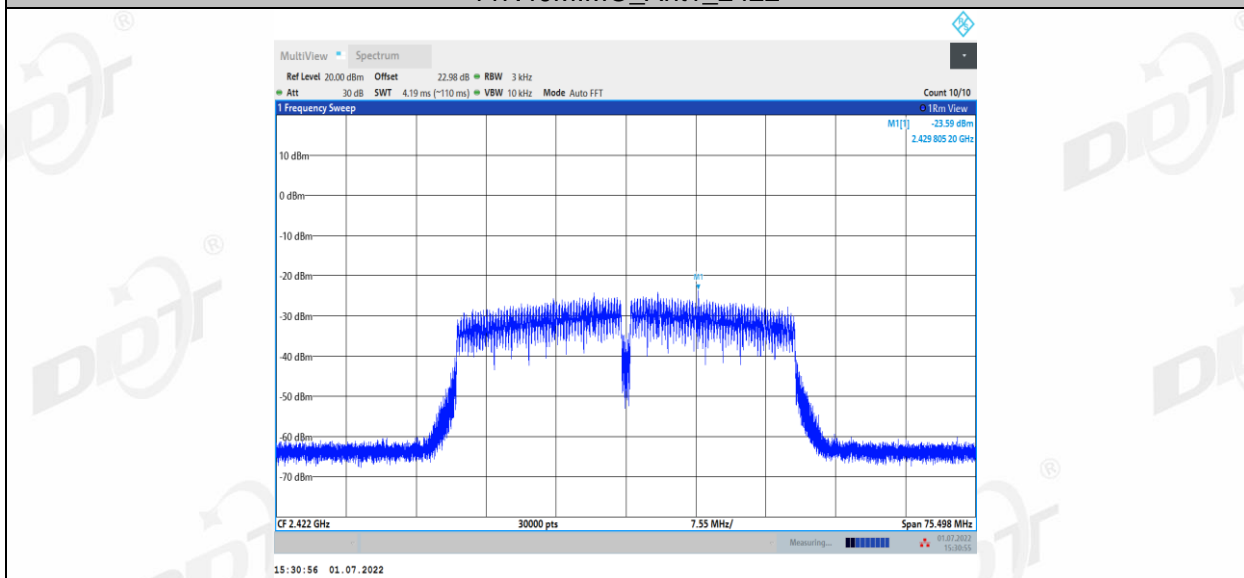


11N40MIMO\_Ant2\_2422

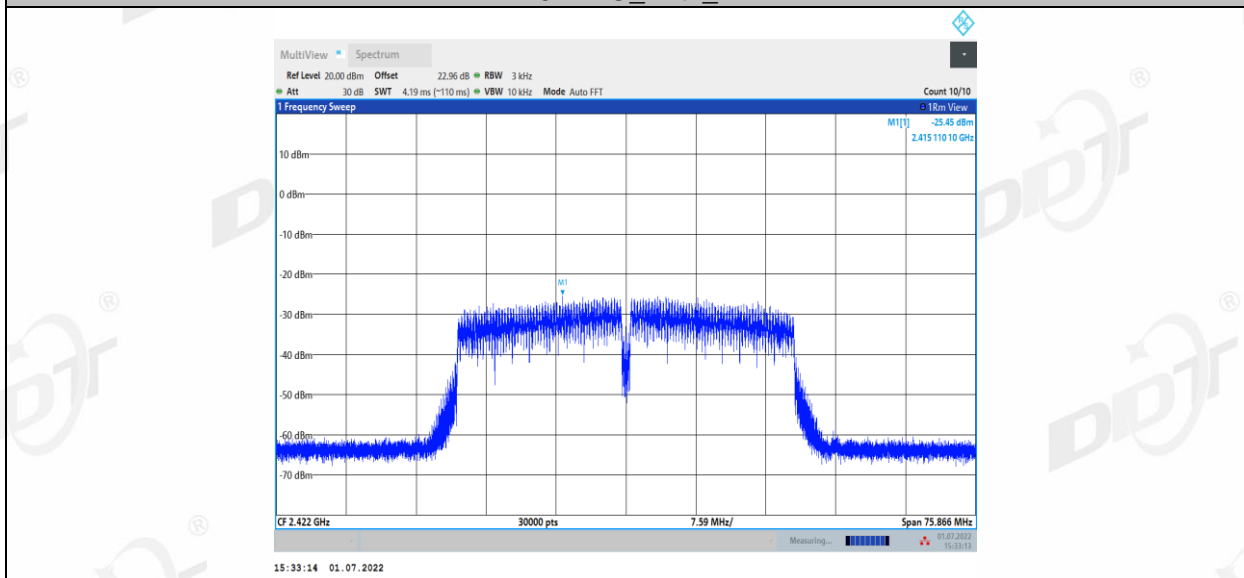


11N40MIMO\_Ant1\_2437

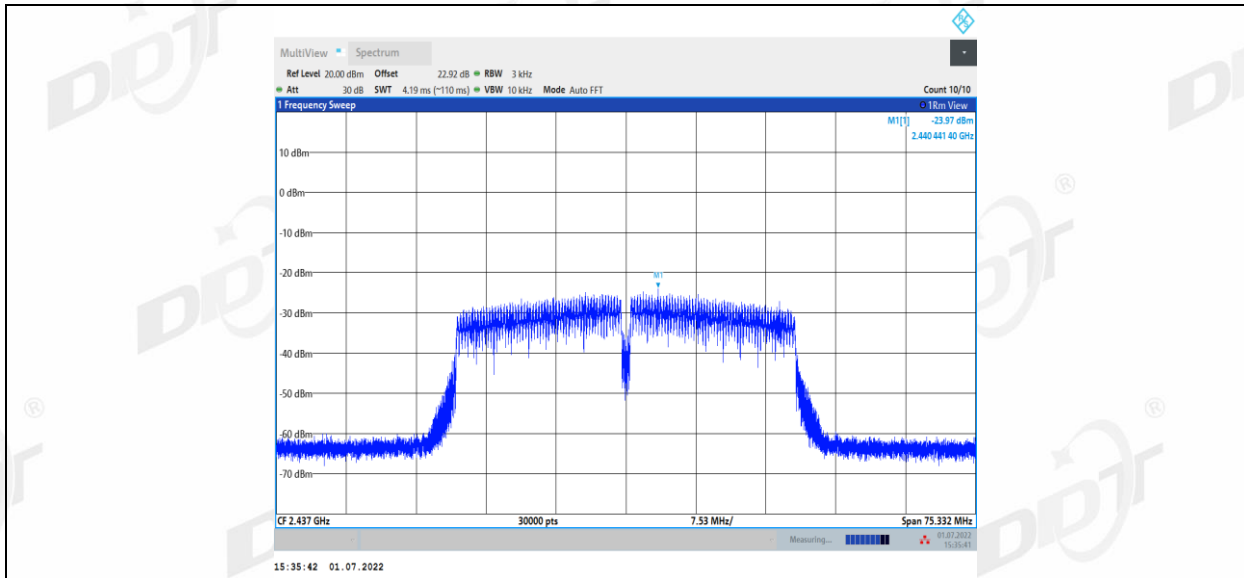


11N40MIMO\_Ant2\_2437

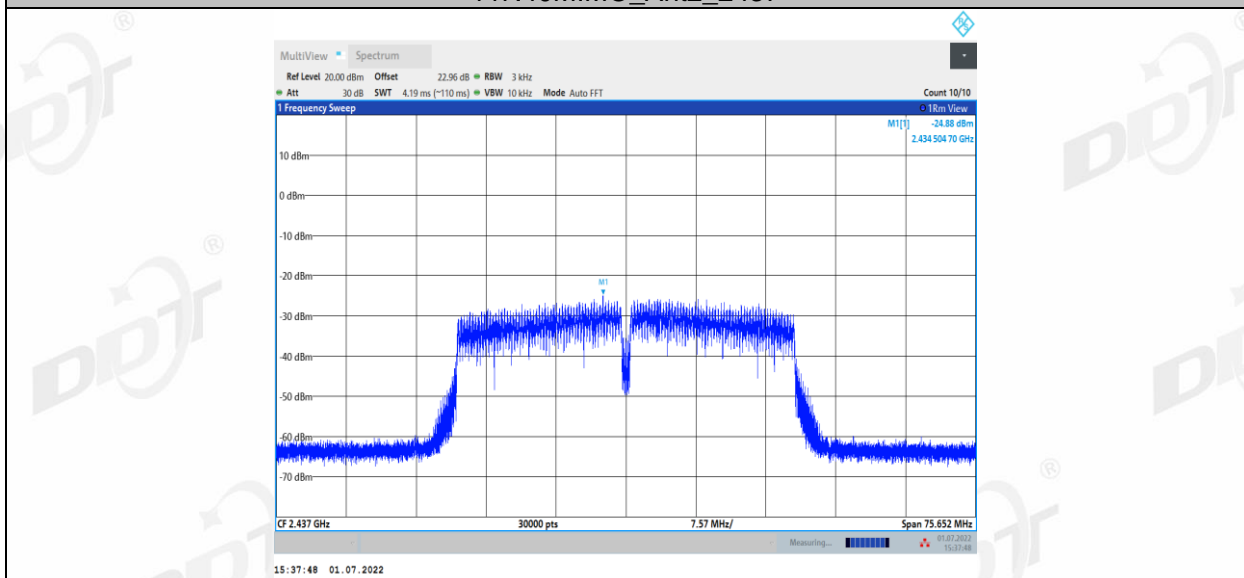


11N40MIMO\_Ant1\_2452

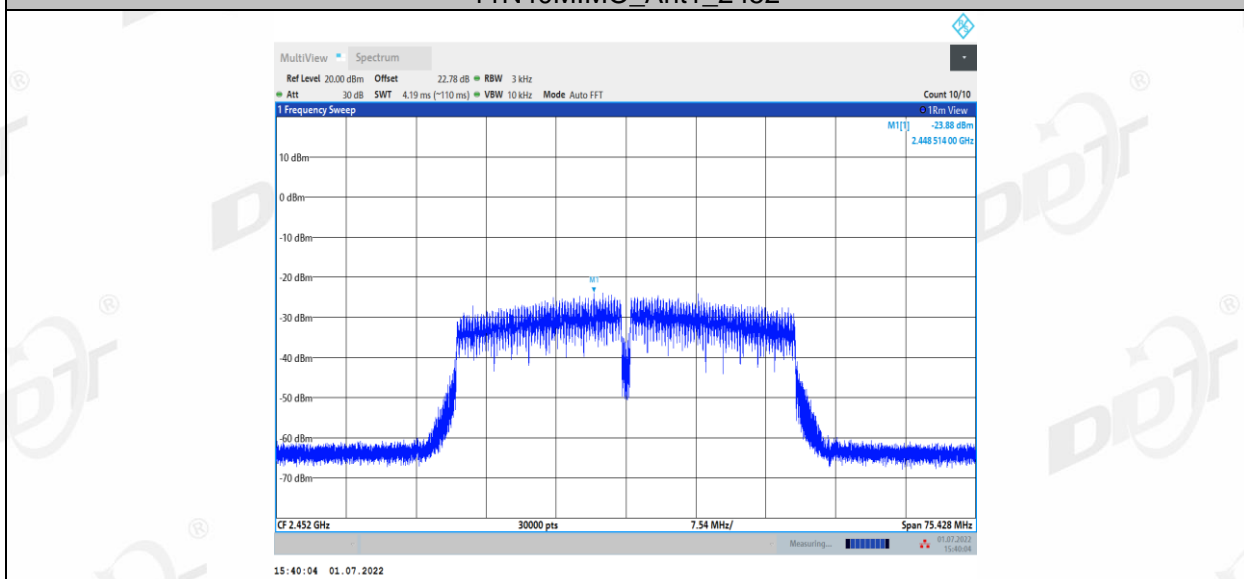


11N40MIMO\_Ant2\_2452

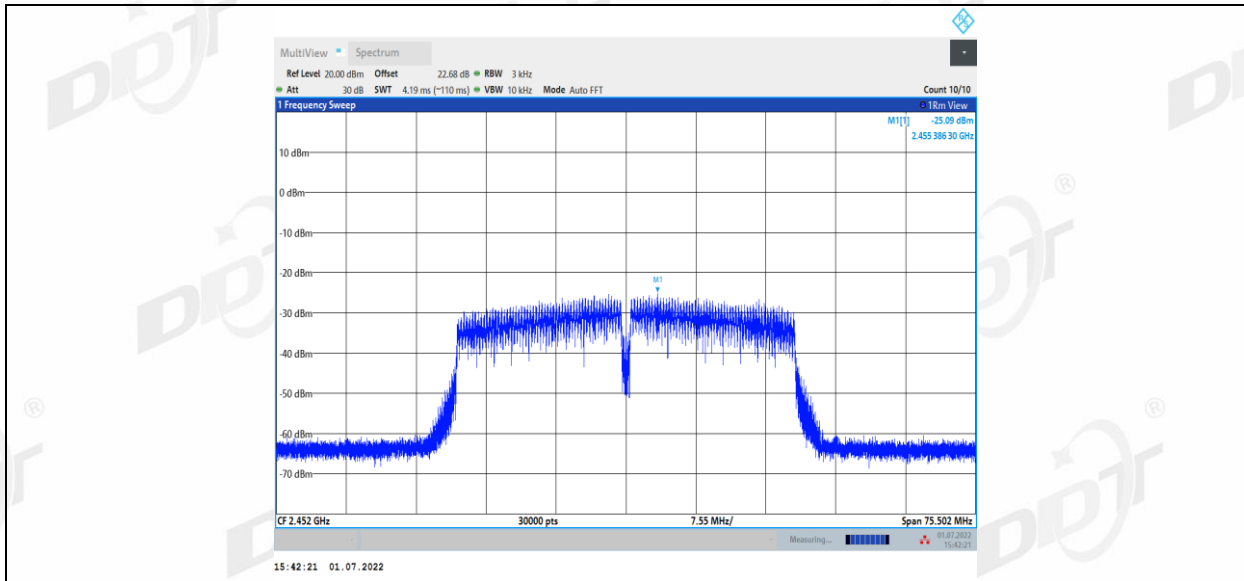


11AX20MIMO\_Ant1\_2412

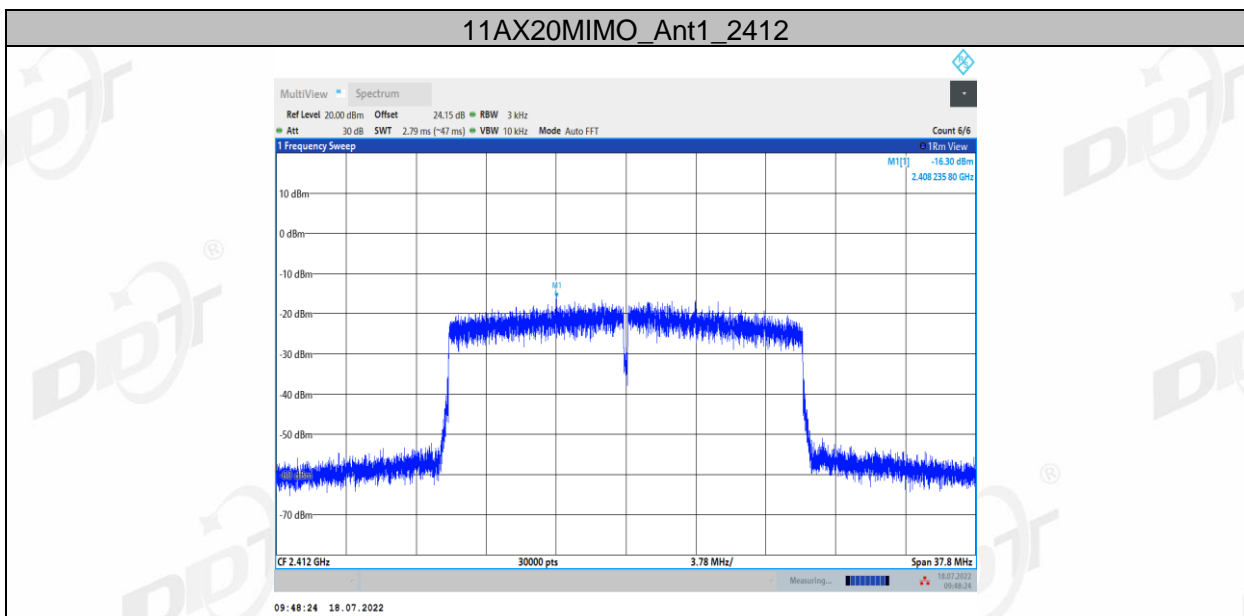


11AX20MIMO\_Ant2\_2412

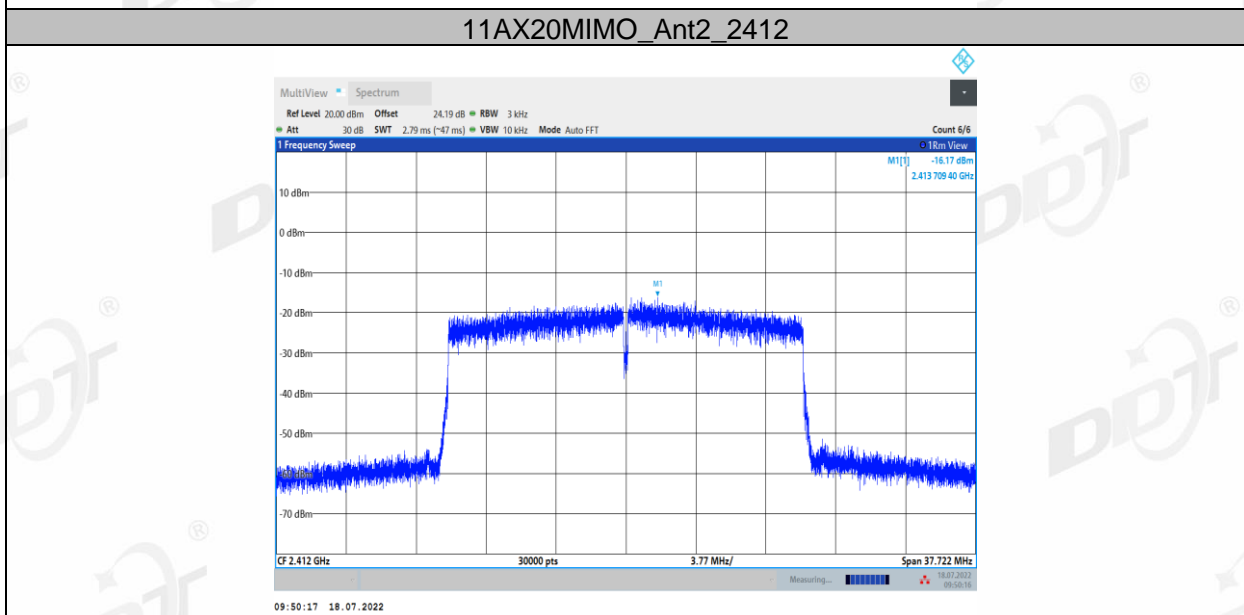


11AX20MIMO\_Ant1\_2437

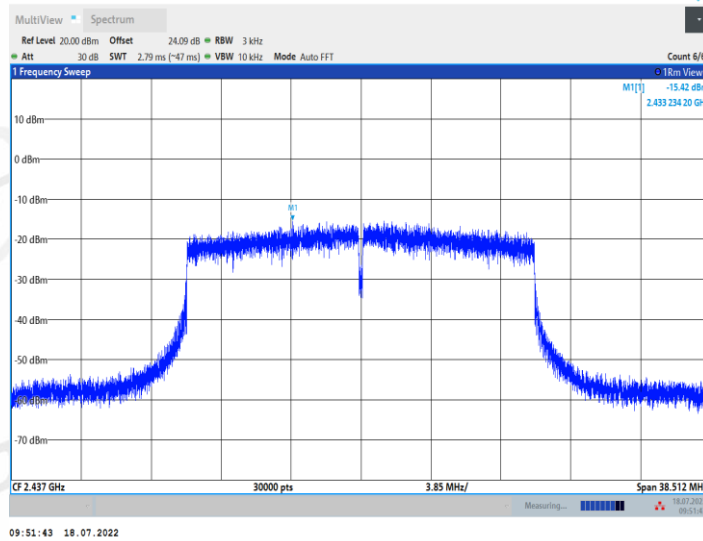


11AX20MIMO\_Ant2\_2437

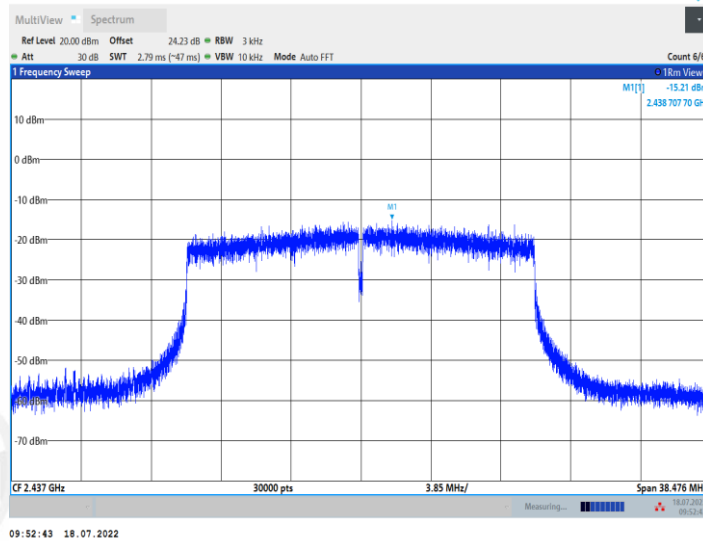


11AX20MIMO\_Ant1\_2462

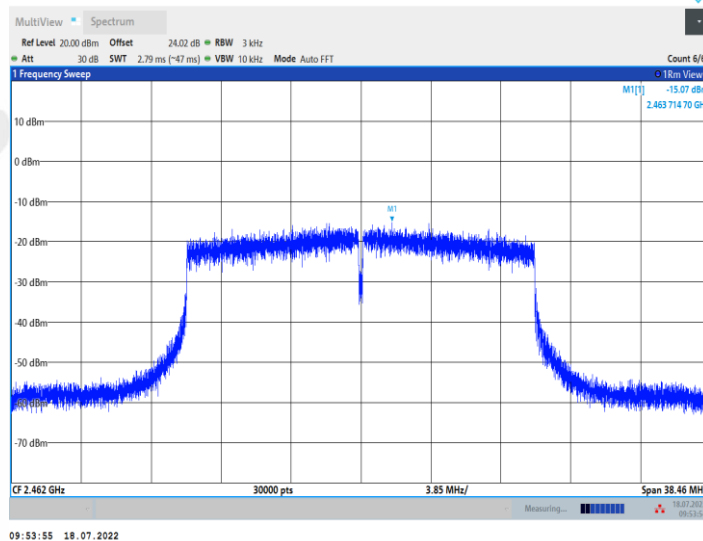


11AX20MIMO\_Ant2\_2462

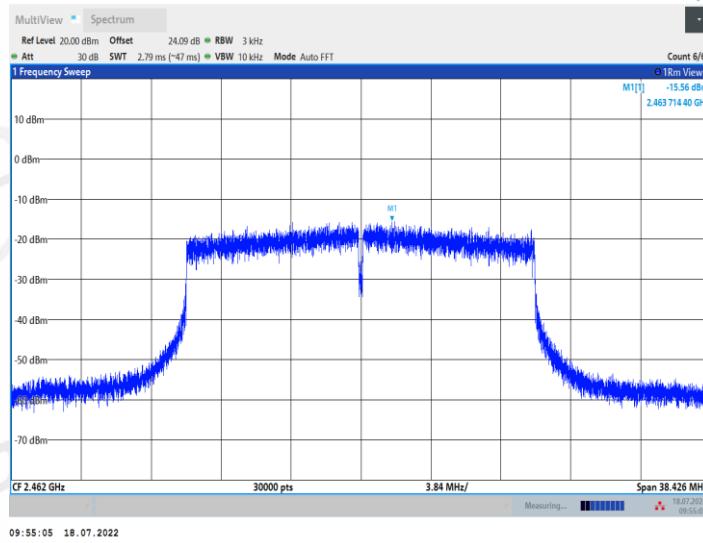

11AX40MIMO\_Ant1\_2422

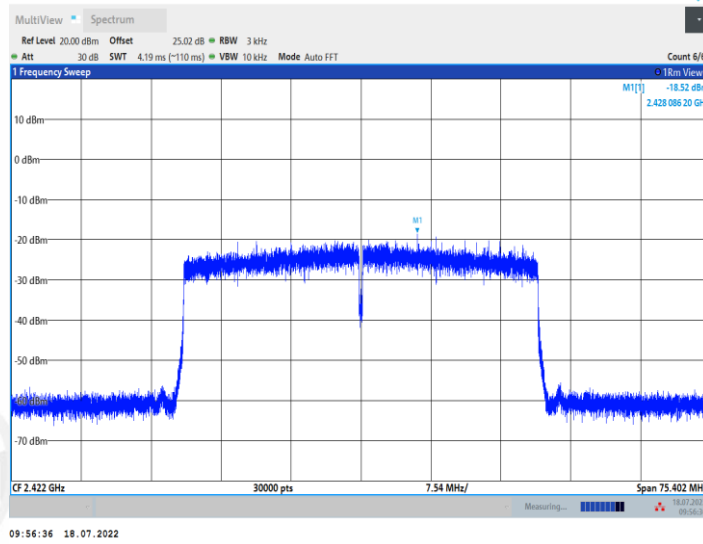


11AX40MIMO\_Ant2\_2422

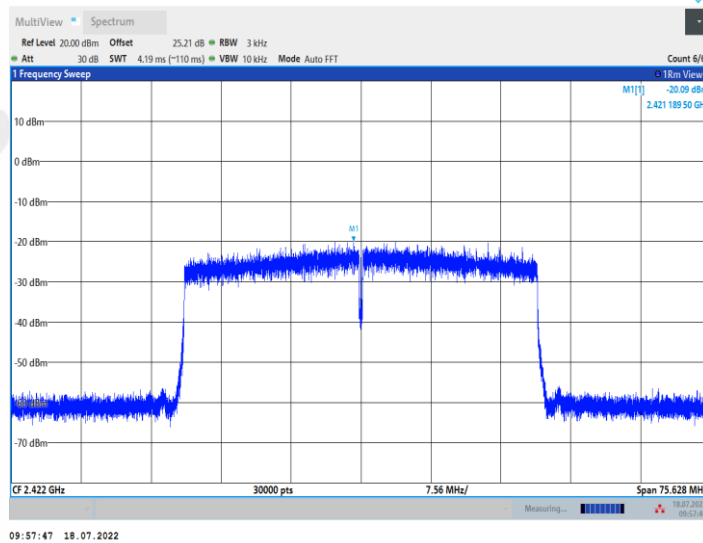





11AX40MIMO\_Ant1\_2437

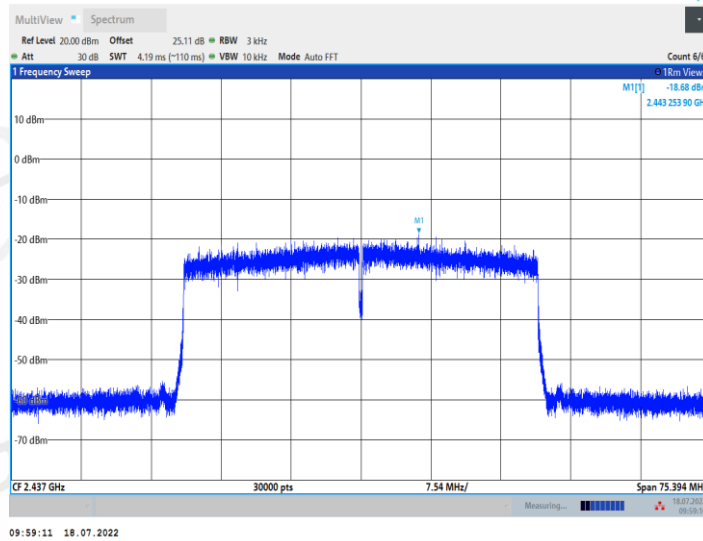


11AX40MIMO\_Ant2\_2437

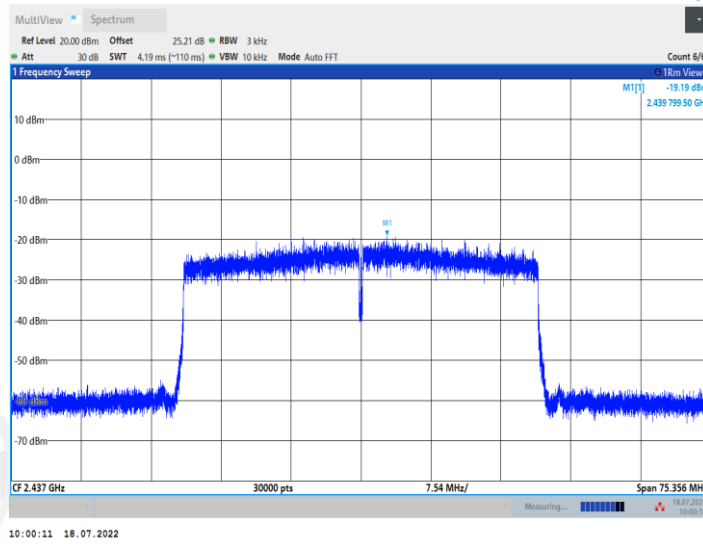


11AX40MIMO\_Ant1\_2452

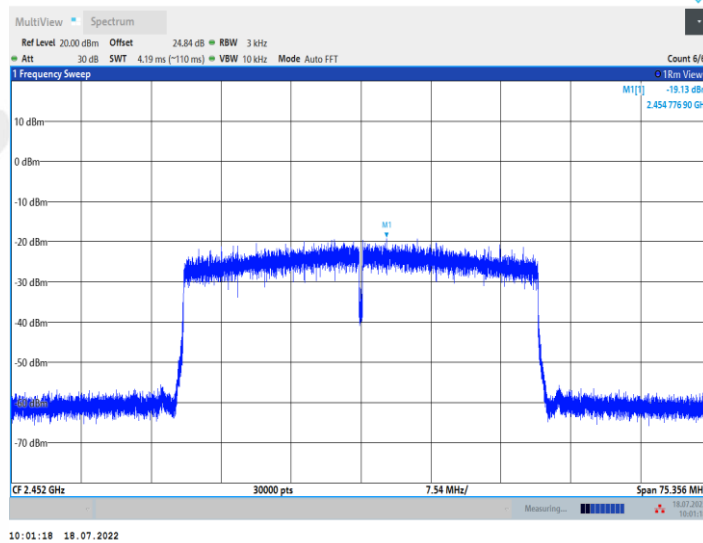


11AX40MIMO\_Ant2\_2452

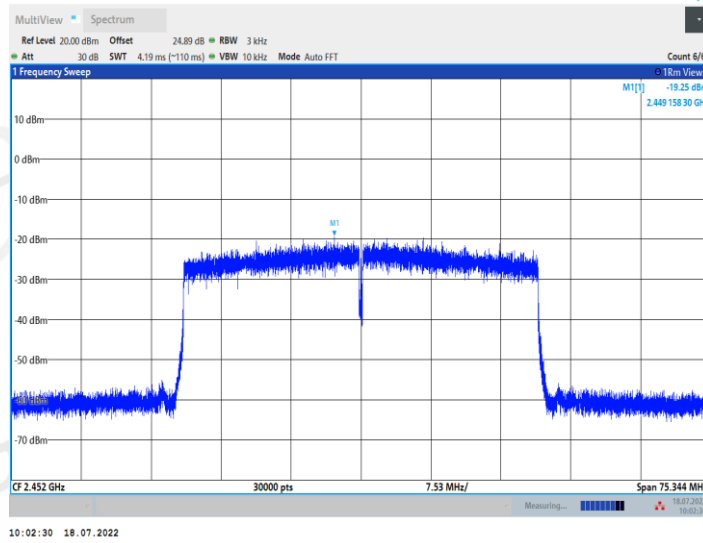


11AX20MIMO\_Ant1\_2412\_26Tone\_RU0

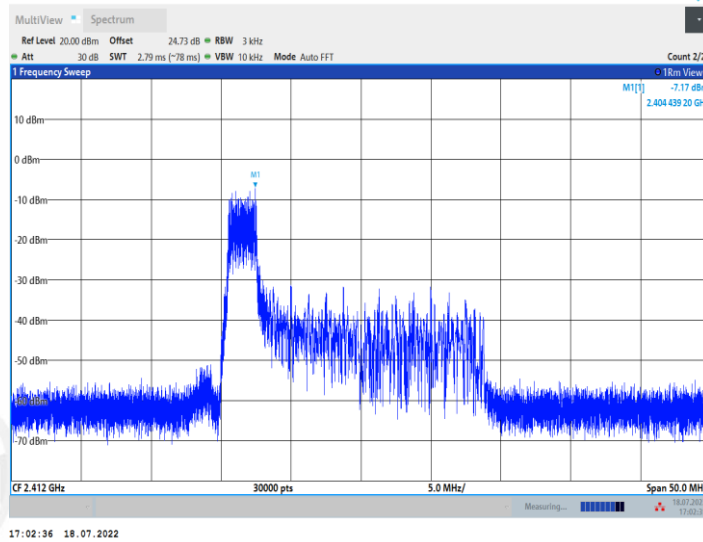


11AX20MIMO\_Ant1\_2412\_26Tone\_RU4

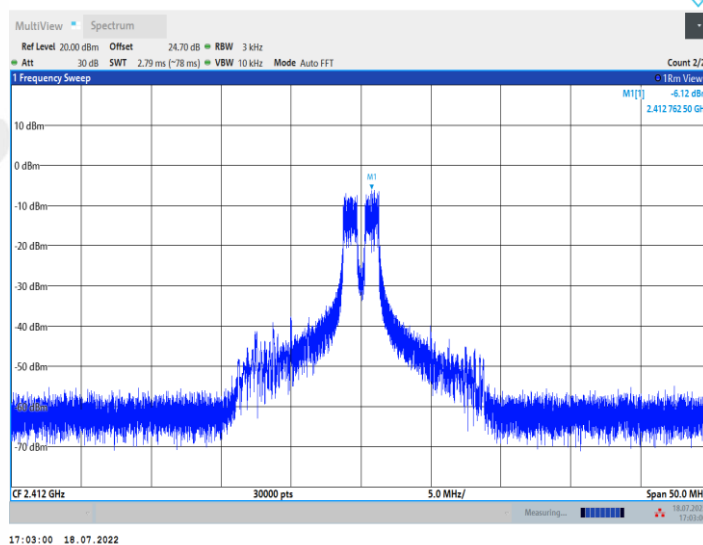


11AX20MIMO\_Ant1\_2412\_26Tone\_RU8

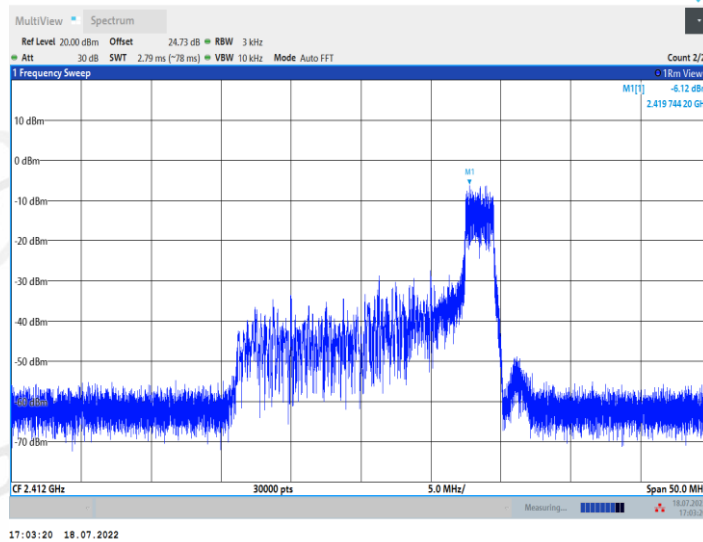


11AX20MIMO\_Ant1\_2412\_52Tone\_RU37

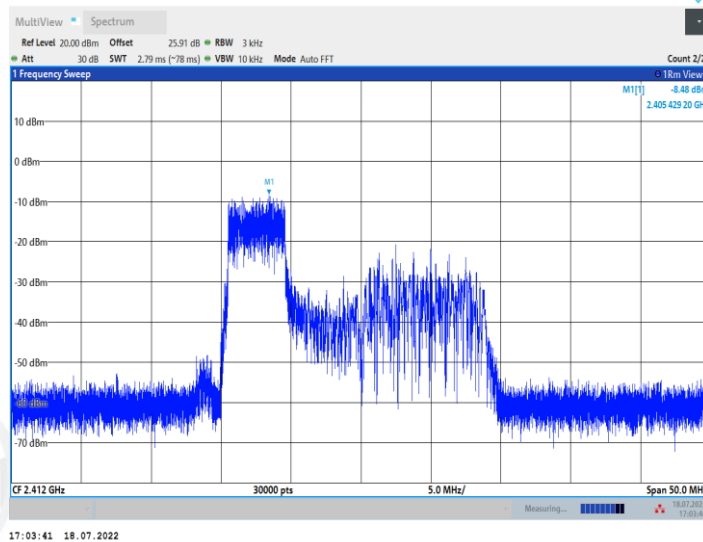


11AX20MIMO\_Ant1\_2412\_52Tone\_RU38

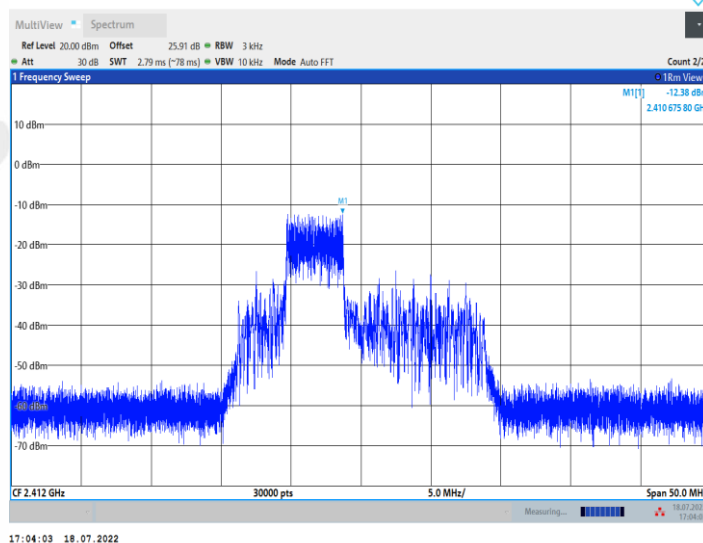


11AX20MIMO\_Ant1\_2412\_52Tone\_RU39

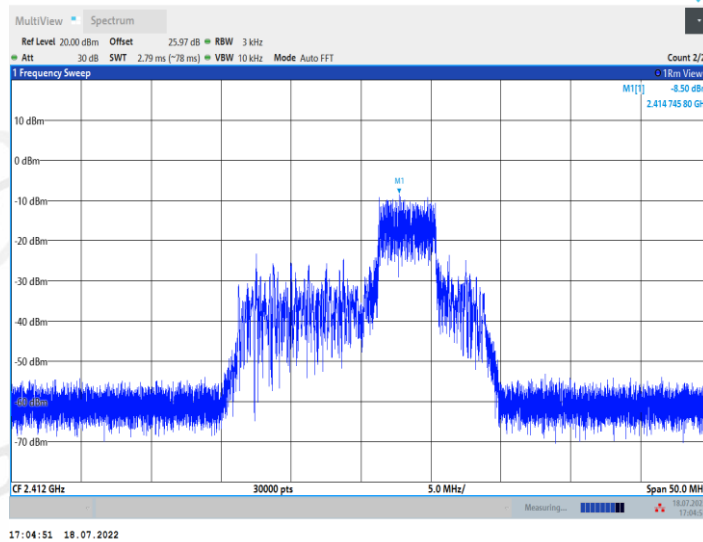


11AX20MIMO\_Ant1\_2412\_52Tone\_RU40

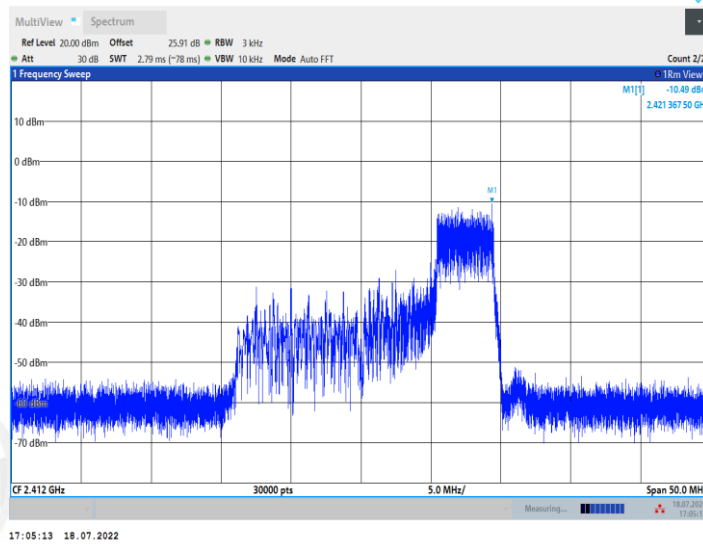


11AX20MIMO\_Ant1\_2412\_106Tone\_RU53

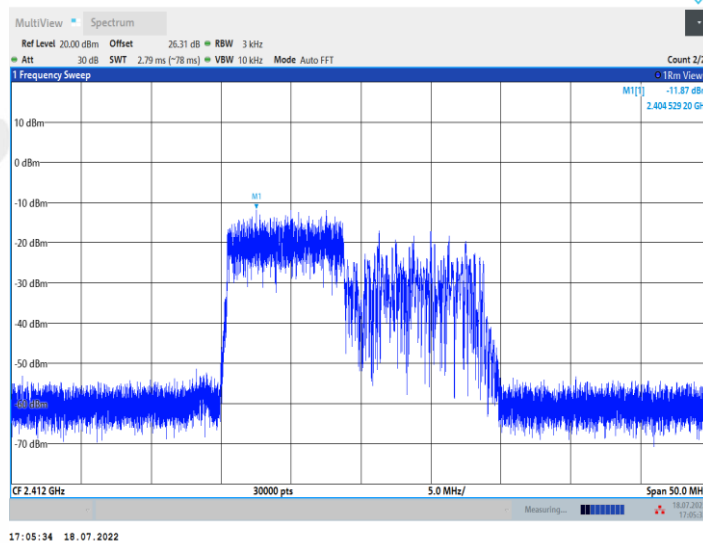


11AX20MIMO\_Ant1\_2412\_106Tone\_RU54

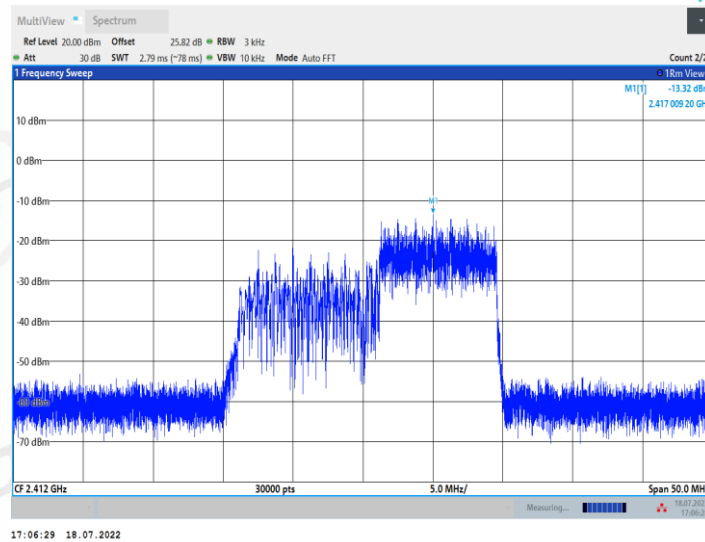


11AX20MIMO\_Ant2\_2412\_26Tone\_RU0

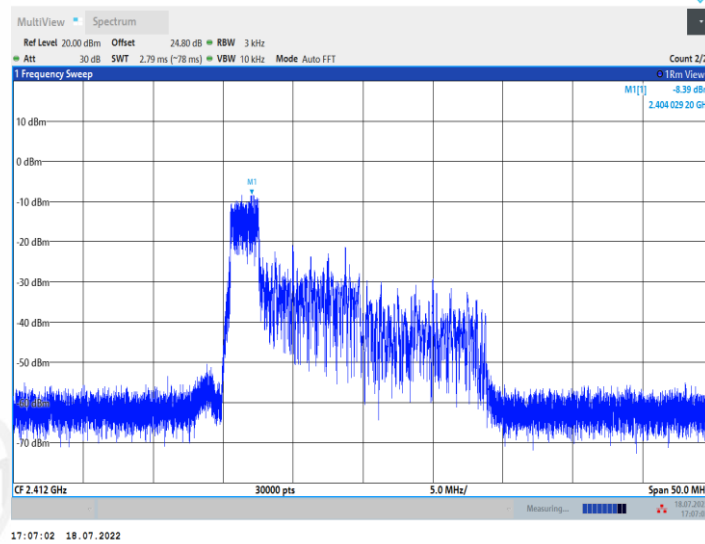


11AX20MIMO\_Ant2\_2412\_26Tone\_RU4

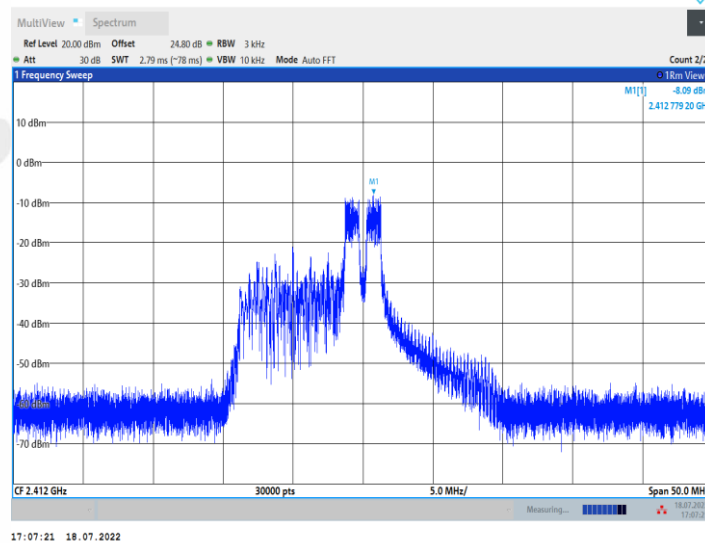


11AX20MIMO\_Ant2\_2412\_26Tone\_RU8

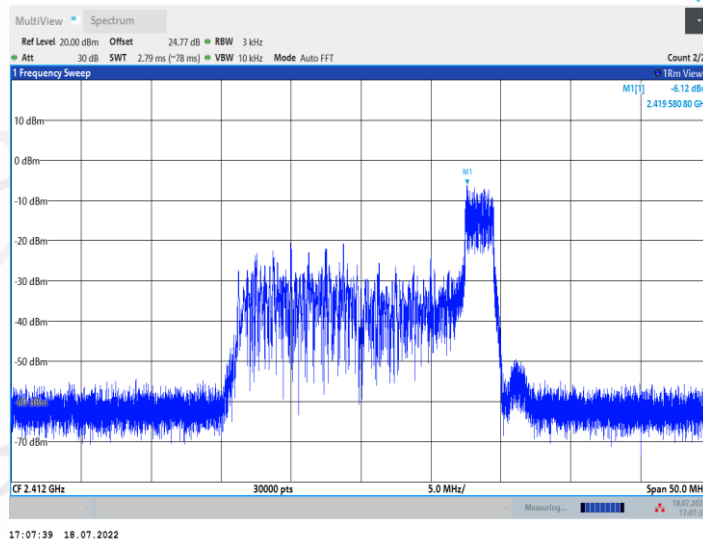

11AX20MIMO\_Ant2\_2412\_52Tone\_RU37

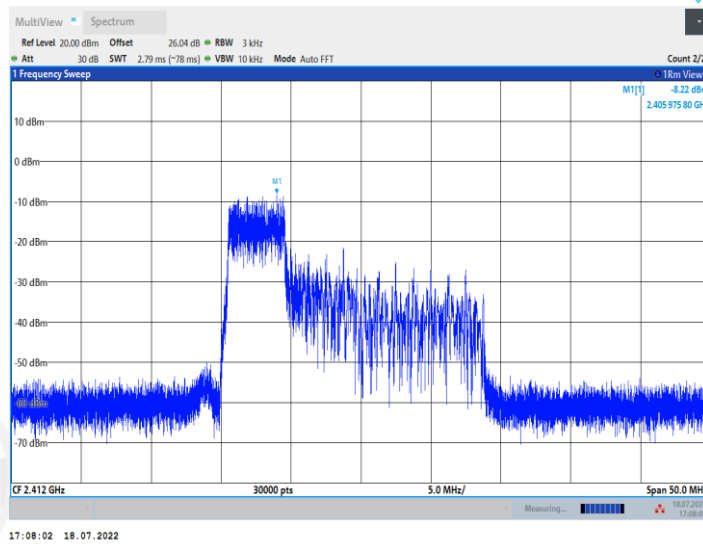


11AX20MIMO\_Ant2\_2412\_52Tone\_RU38

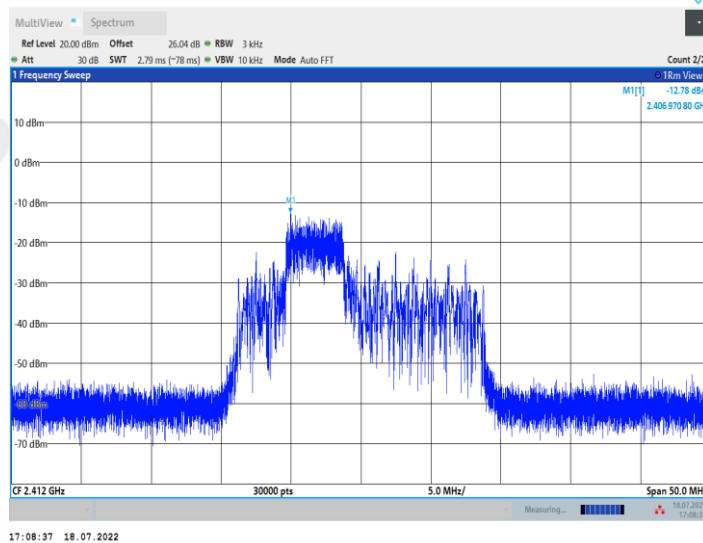




11AX20MIMO\_Ant2\_2412\_52Tone\_RU39

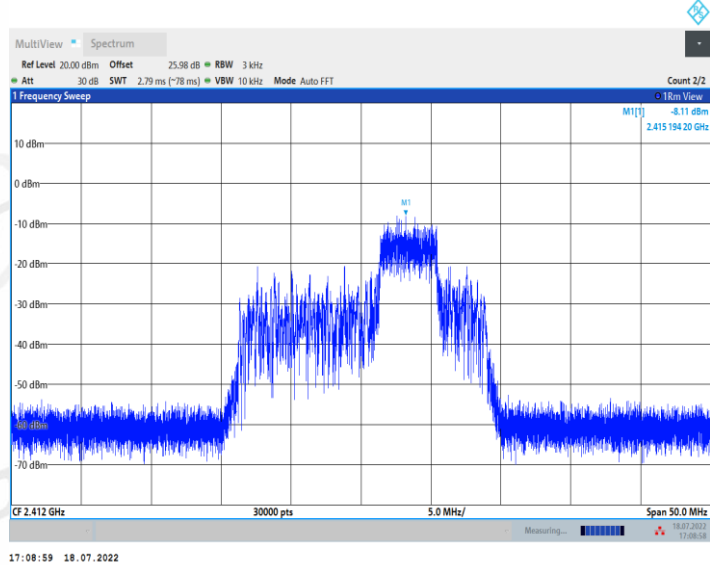

11AX20MIMO\_Ant2\_2412\_52Tone\_RU40

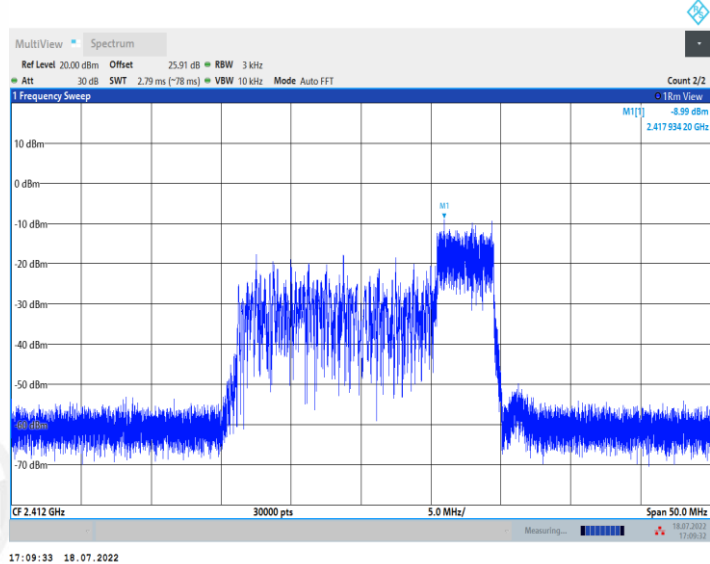

11AX20MIMO\_Ant2\_2412\_106Tone\_RU53

