


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

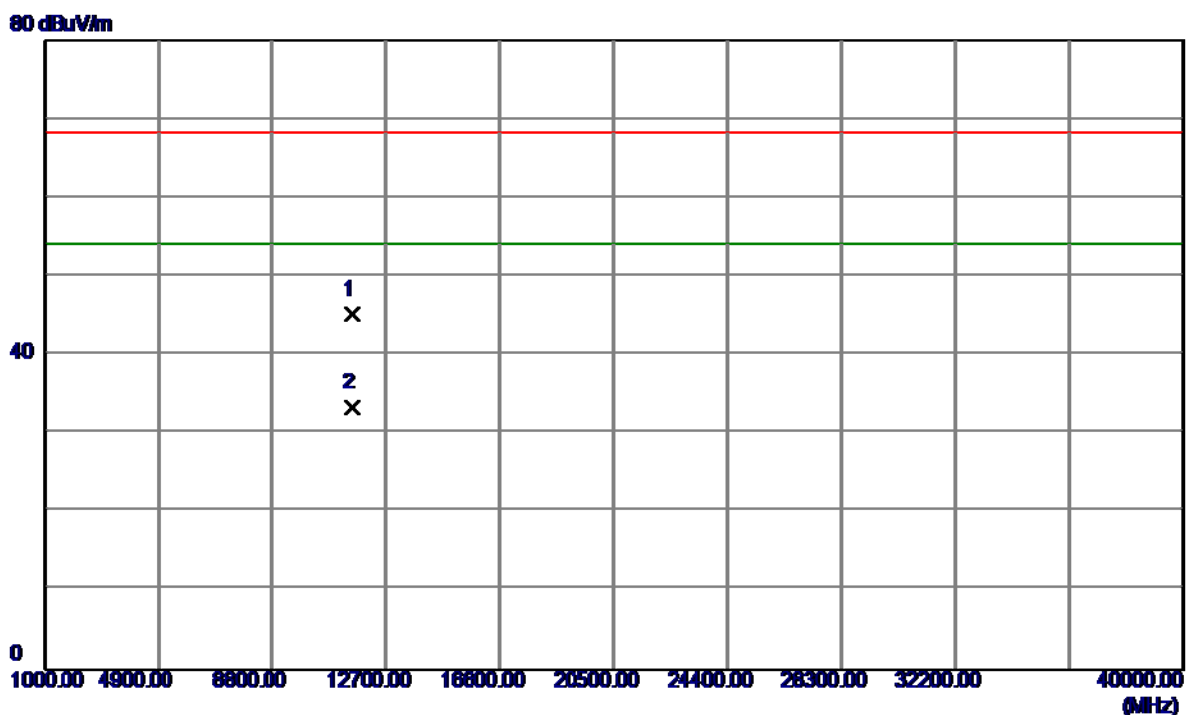


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.1000	29.62	15.54	45.16	68.30	-23.14	Peak	
2	11550.4000	17.76	15.54	33.30	54.00	-20.70	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal


115 dBuV/m

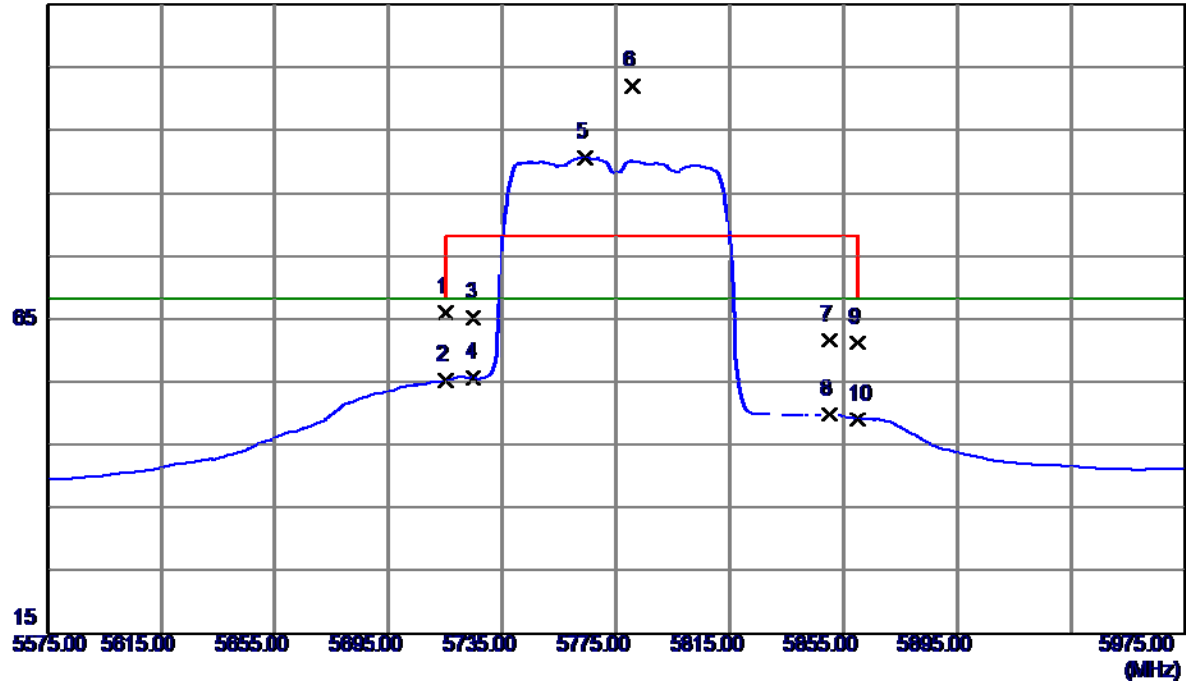

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	25.19	40.54	66.03	68.30	-2.27	Peak	
2	5715.0000	14.63	40.54	55.17	68.30	-13.13	AVG	
3	5725.0000	24.69	40.59	65.28	78.30	-13.02	Peak	
4	5725.0000	15.05	40.59	55.64	68.30	-12.66	AVG	
5	5764.2000	49.90	40.79	90.69	68.30	22.39	AVG	No Limit
6	5780.6000	61.11	40.88	101.99	78.30	23.69	Peak	No Limit
7	5850.0000	20.43	41.23	61.66	78.30	-16.64	Peak	
8	5850.0000	8.55	41.23	49.78	68.30	-18.52	AVG	
9	5860.0000	19.88	41.28	61.16	78.30	-17.14	Peak	
10	5860.0000	7.77	41.28	49.05	68.30	-19.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

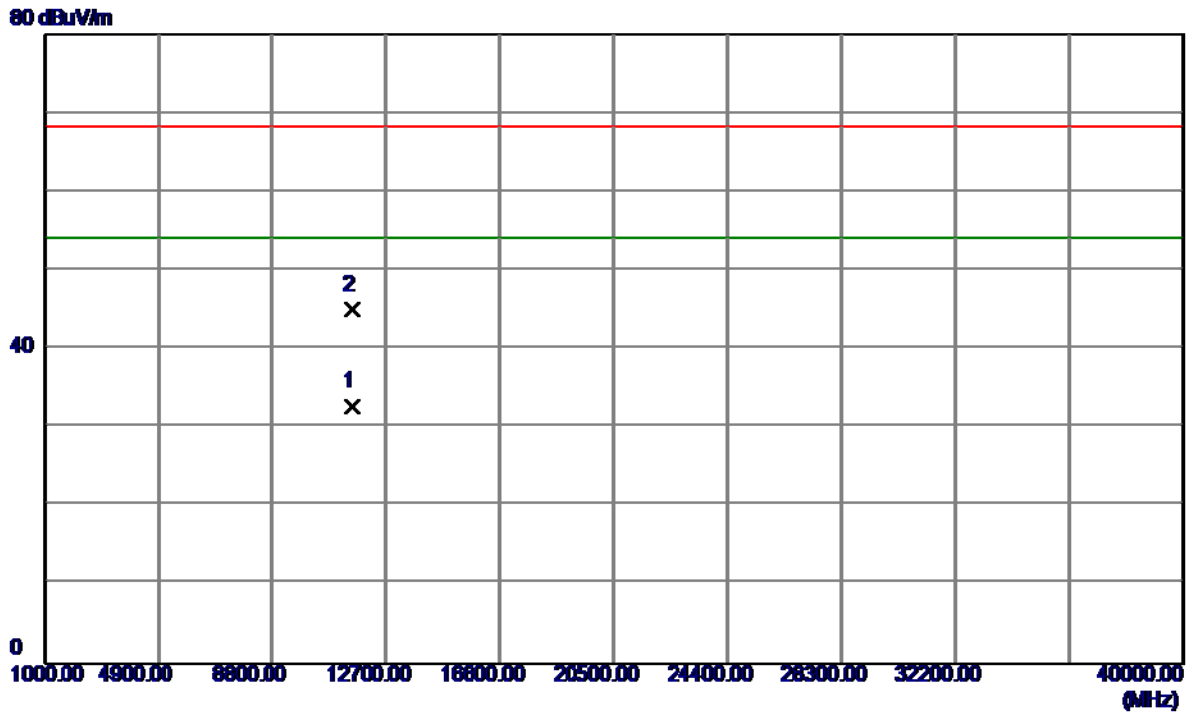

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.8000	17.15	15.54	32.69	51.00	-21.31	AVG	
2	11550.9300	29.40	15.54	44.94	68.30	-23.36	Peak	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 2.06 msec

T_{Total} : 2.18 msec

Duty cycle: 94.50%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.25$$

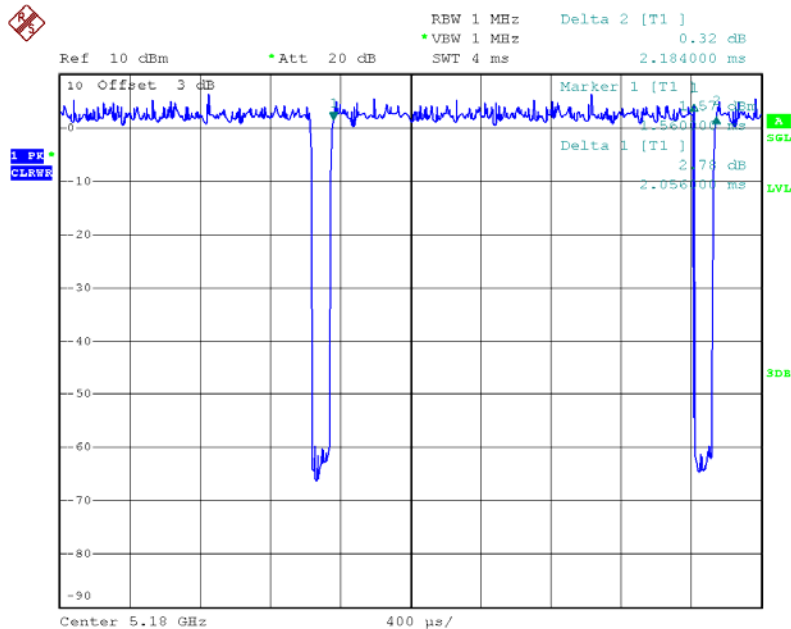

Date: 30.MAR.2016 17:17:14

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.98 msec

T_{Total} : 1.09 msec

Duty cycle: 89.91%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.46$$

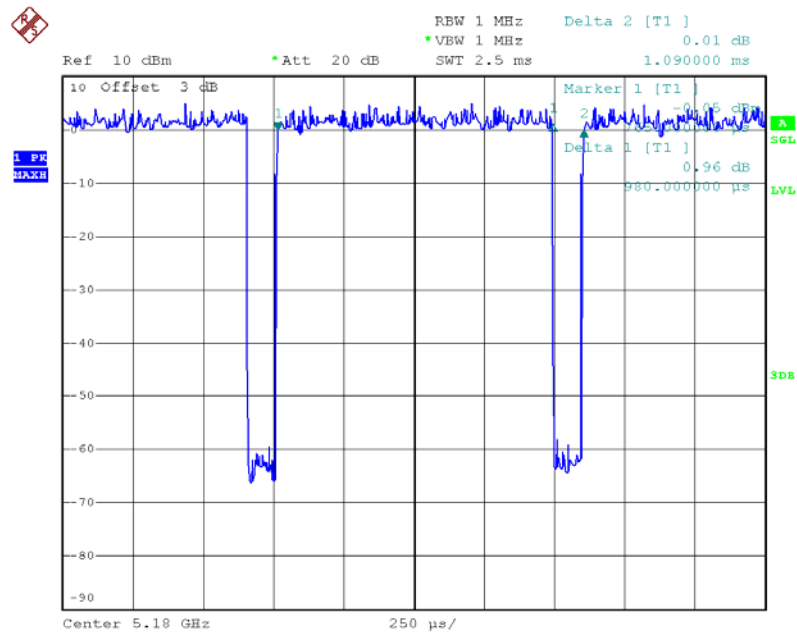

Date: 30.MAR.2016 17:18:19

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as
 Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.45 msec

T_{Total} : 0.60 msec

Duty cycle: 75.00%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.25

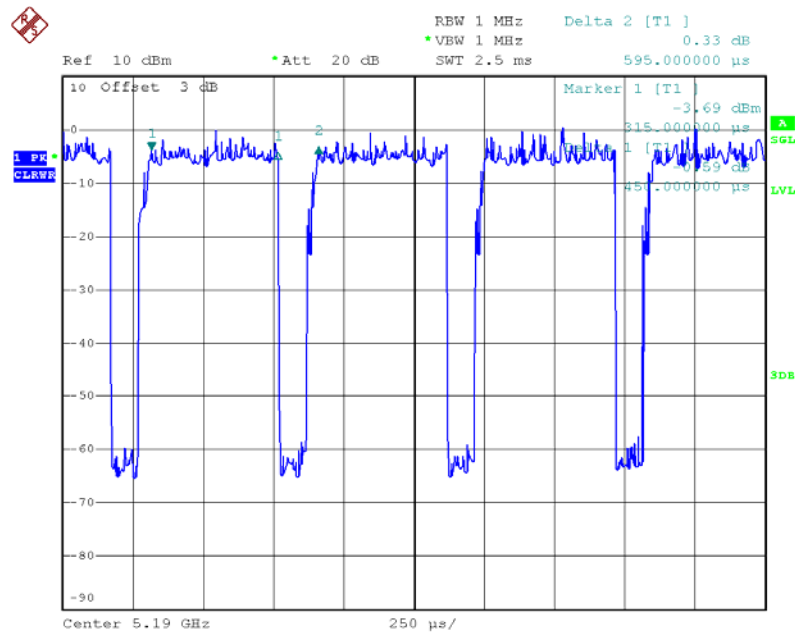

Date: 30.MAR.2016 17:19:10

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as
 Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.98 msec

T_{Total} : 1.03 msec

Duty cycle: 95.15%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

$$\text{Duty Factor} = 0.22$$

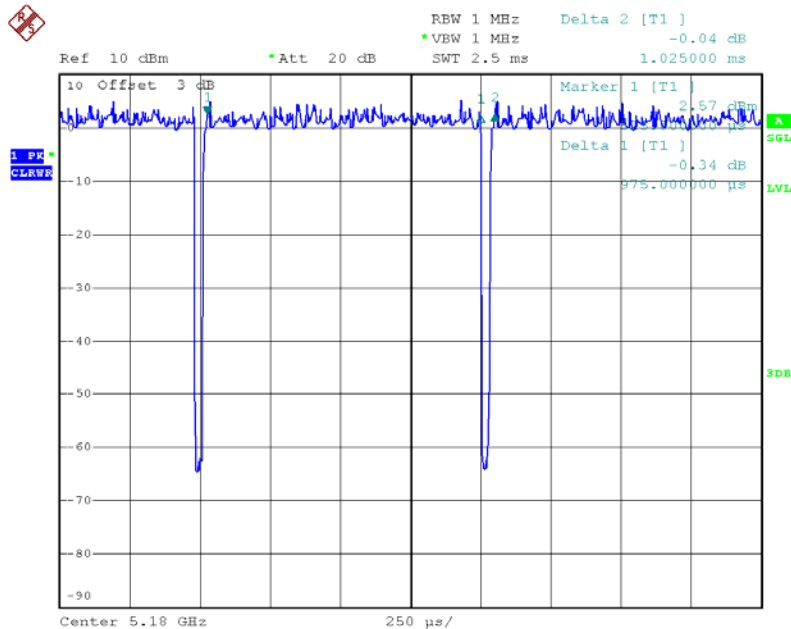

Date: 30.MAR.2016 17:18:47

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducusy factor
 Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.44 msec

T_{Total} : 0.52 msec

Duty cycle: 84.62%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 0.73

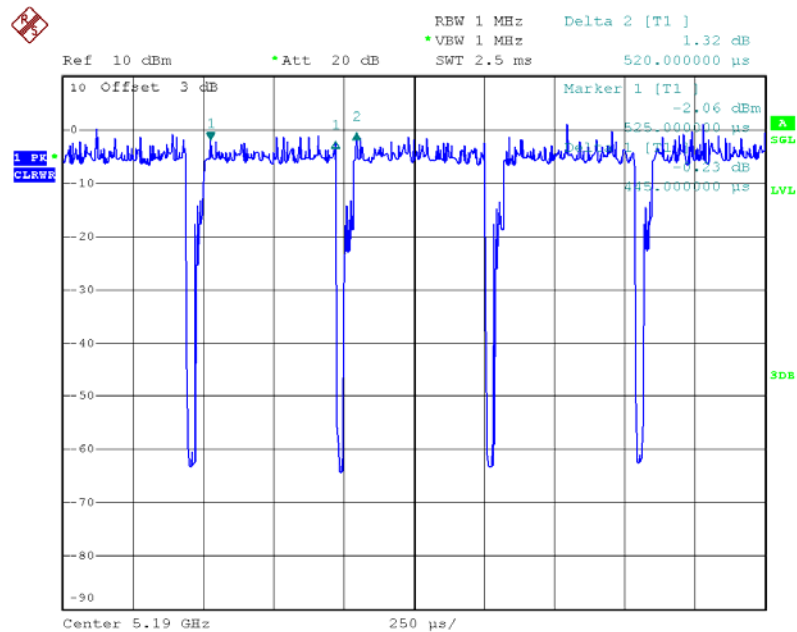

Date: 30.MAR.2016 17:19:52

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$


T_{ON} : 0.20 msec

T_{Total} : 0.28 msec

Duty cycle: 71.43%

$$\text{Duty Factor} = 10 \log(1/\text{Duty cycle})$$

Duty Factor = 1.46

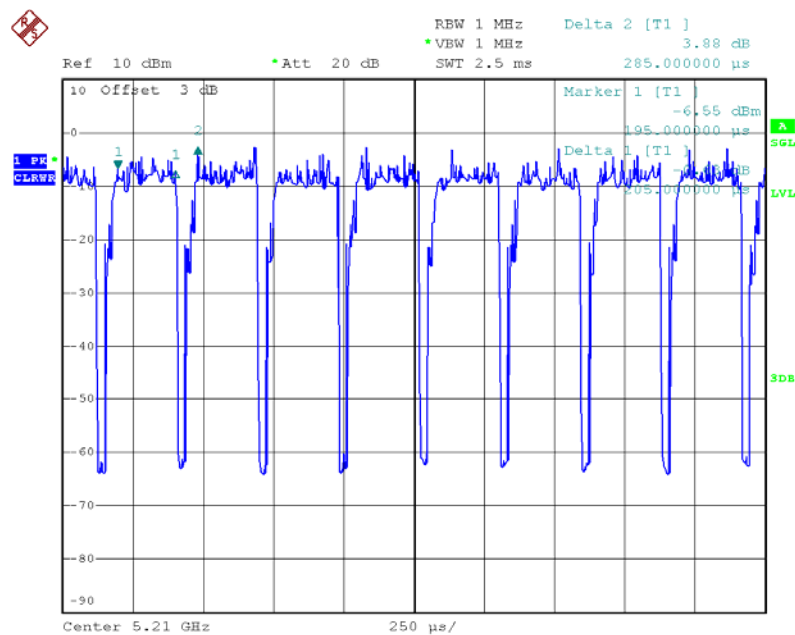

Date: 30.MAR.2016 17:20:18


Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
 Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.99	17.40
CH40	5200	21.95	17.40
CH48	5240	18.91	16.80

TX CH36

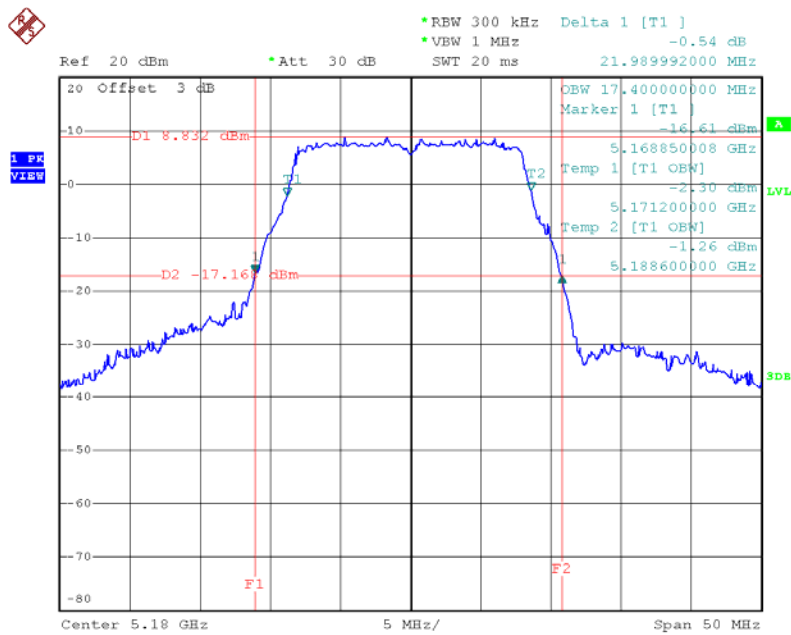


Date: 30.MAR.2016 17:43:09

TX CH40

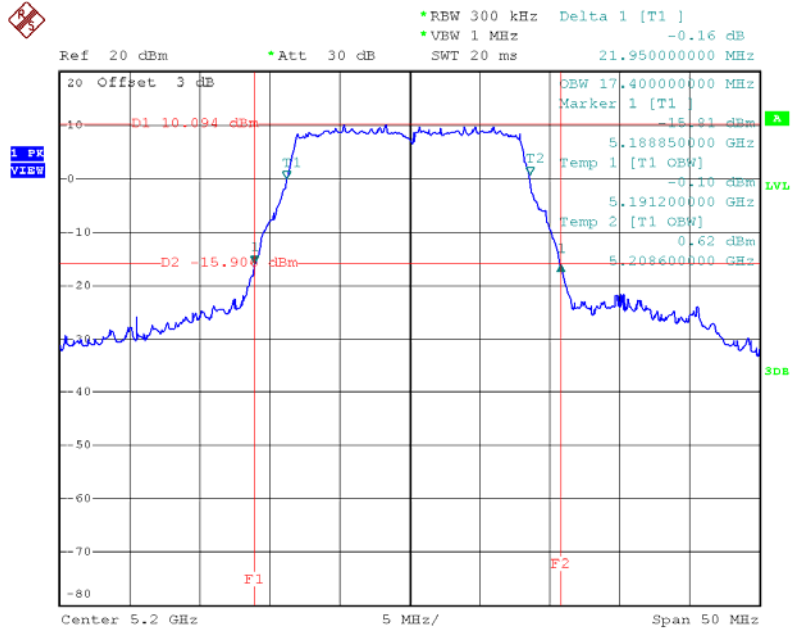

Date: 30.MAR.2016 17:44:06

TX CH48

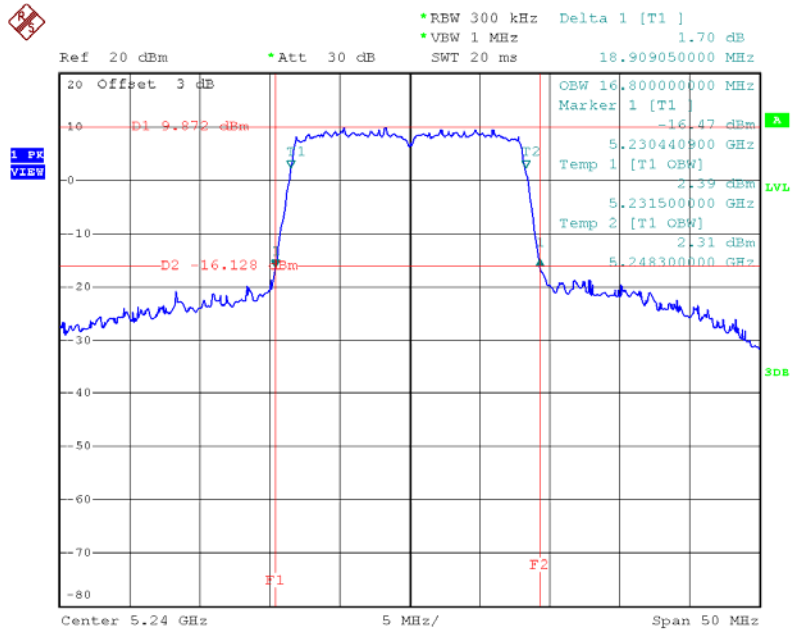


Date: 30.MAR.2016 17:45:06

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.30	18.40
CH40	5200	44.89	24.00
CH48	5240	44.59	24.90

TX CH36

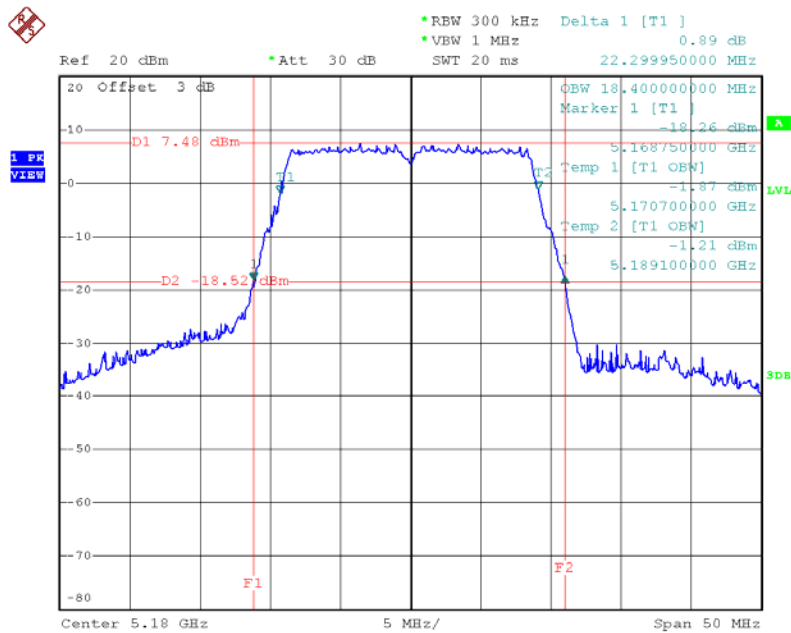


Date: 11.APR.2016 18:04:42

TX CH40

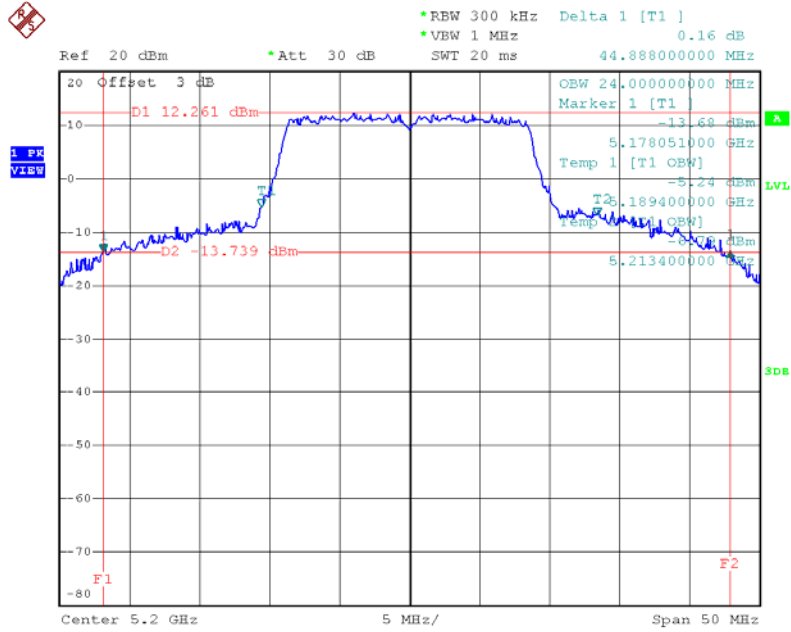

Date: 11.APR.2016 18:05:38

TX CH48

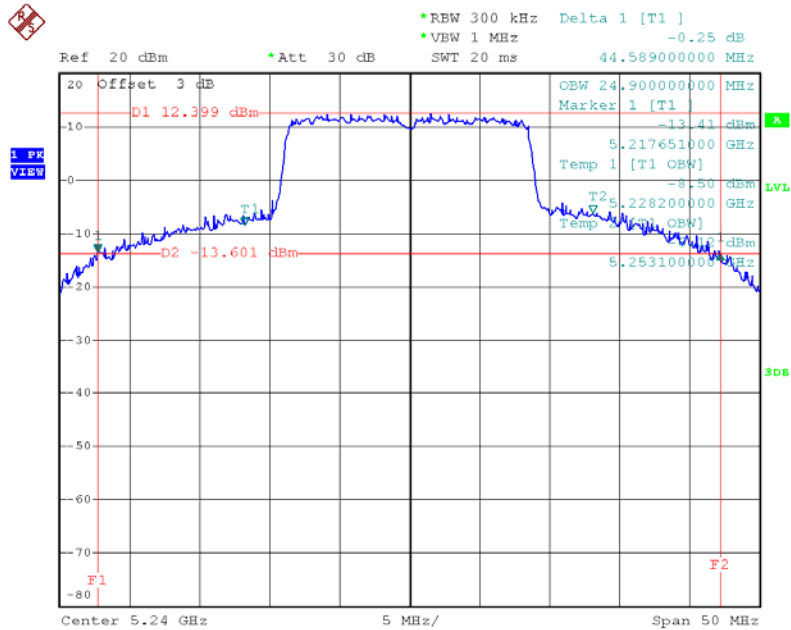


Date: 11.APR.2016 18:06:48

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.30	36.40
CH46	5230	90.40	53.40

TX CH38

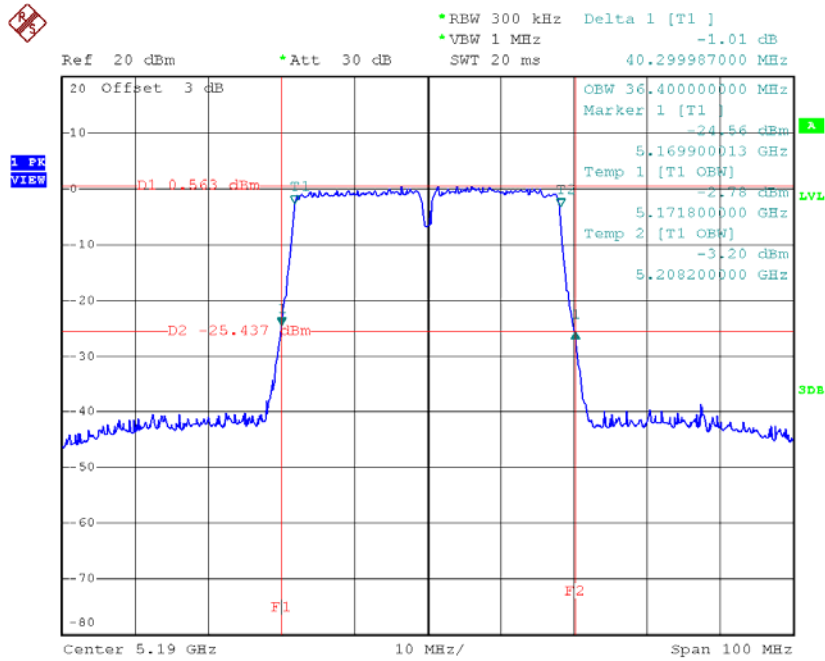

Date: 11.APR.2016 20:33:14

TX CH46

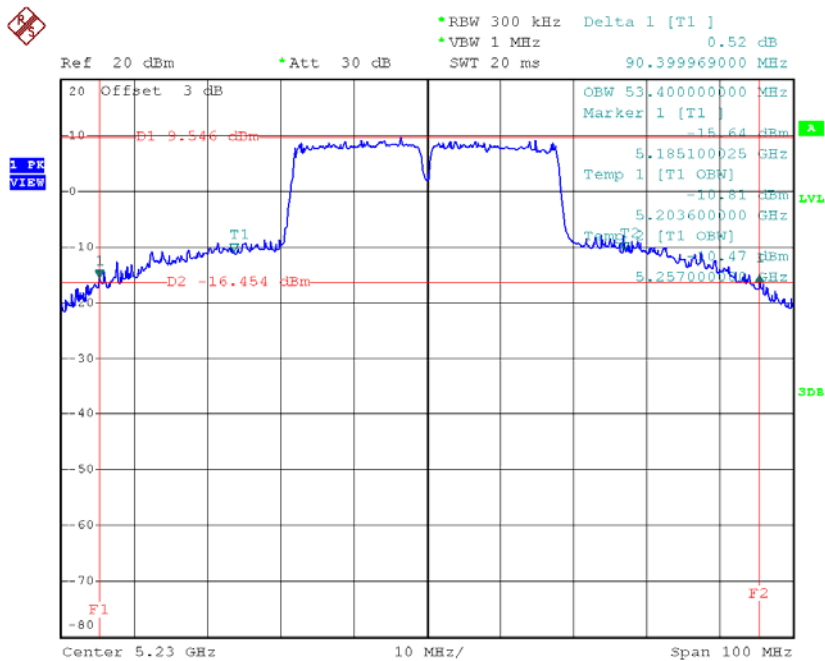


Date: 11.APR.2016 20:34:06

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	18.89	16.80
CH60	5300	21.89	17.40
CH64	5320	21.91	17.40

TX CH52

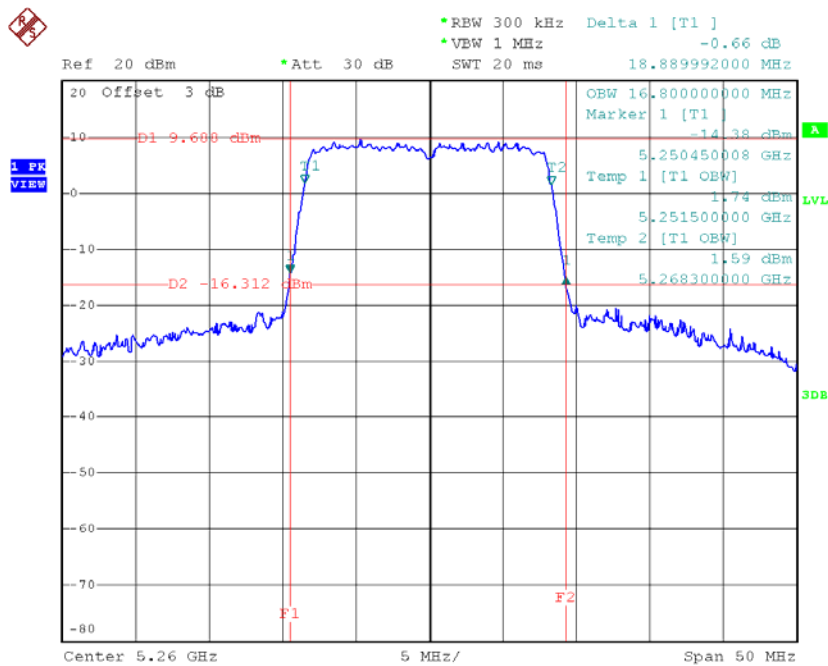


Date: 30.MAR.2016 17:46:10

TX CH60

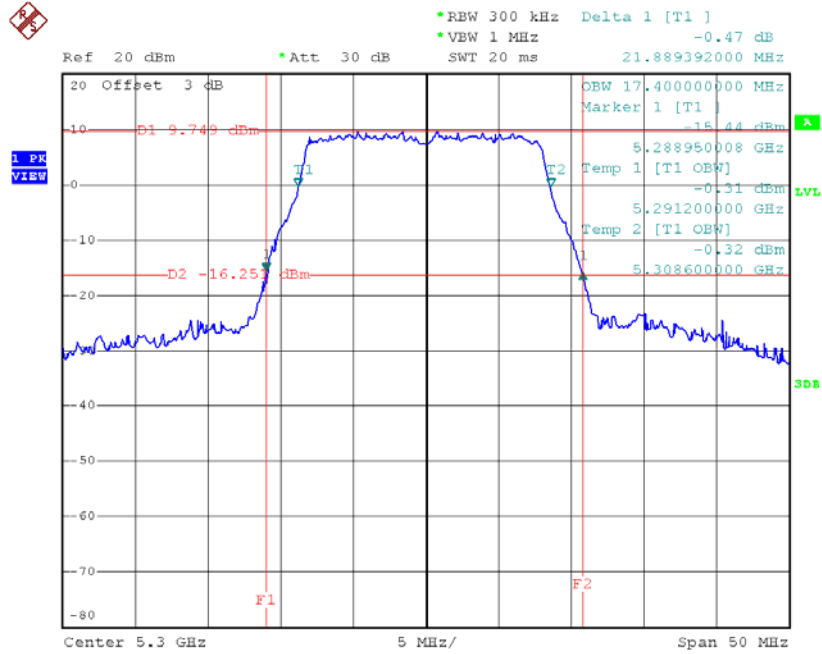

Date: 30.MAR.2016 17:48:11

TX CH64

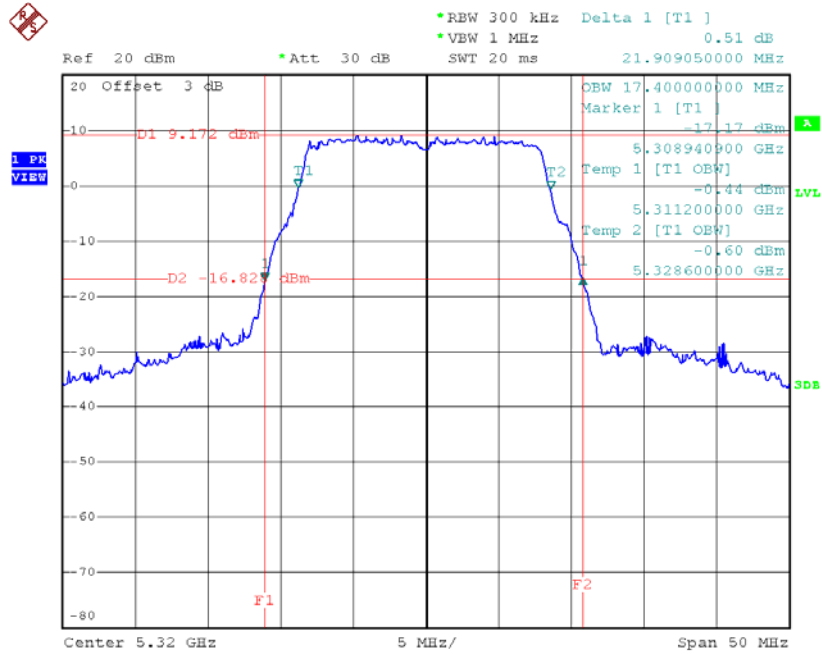


Date: 30.MAR.2016 17:58:20

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.49	17.60
CH60	5300	22.05	18.40
CH64	5320	22.05	18.40

TX CH52

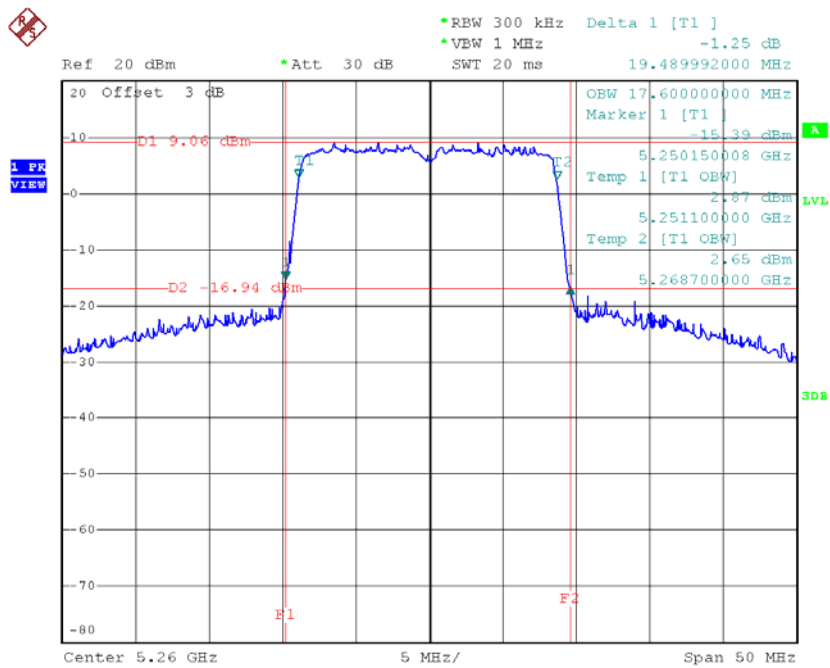


Date: 11.APR.2016 18:07:51

TX CH60

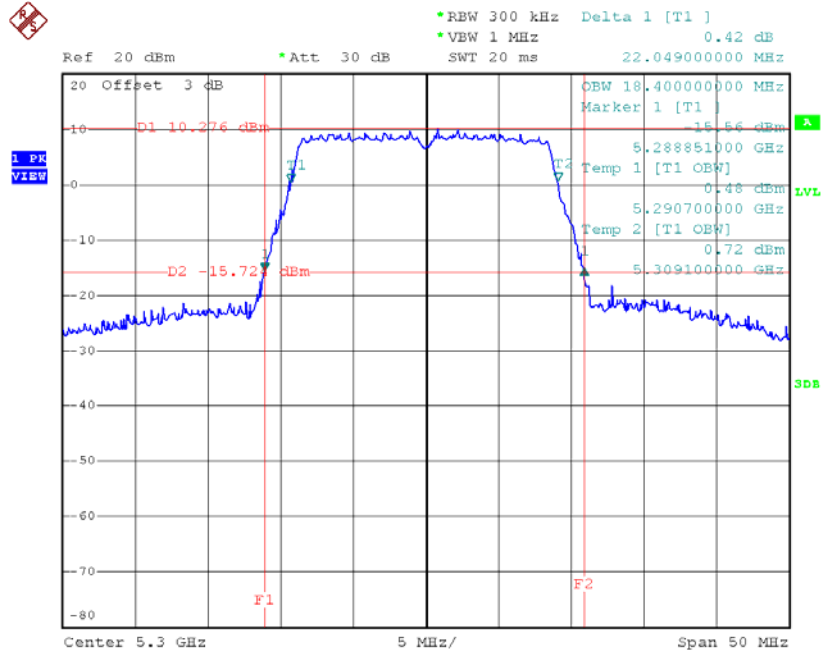

Date: 11.APR.2016 18:09:14

TX CH64

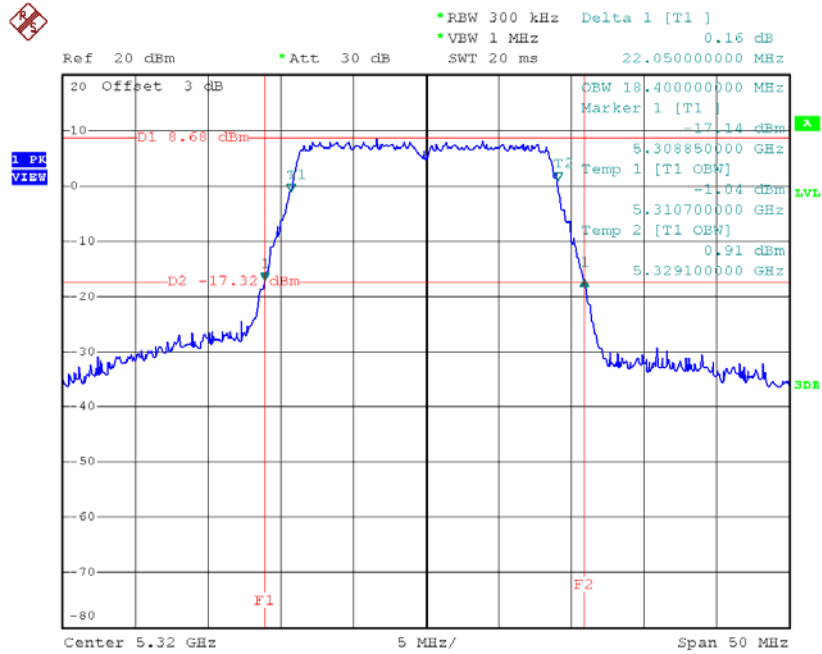


Date: 11.APR.2016 18:12:02

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.70	36.60
CH62	5310	40.10	36.40

TX CH54

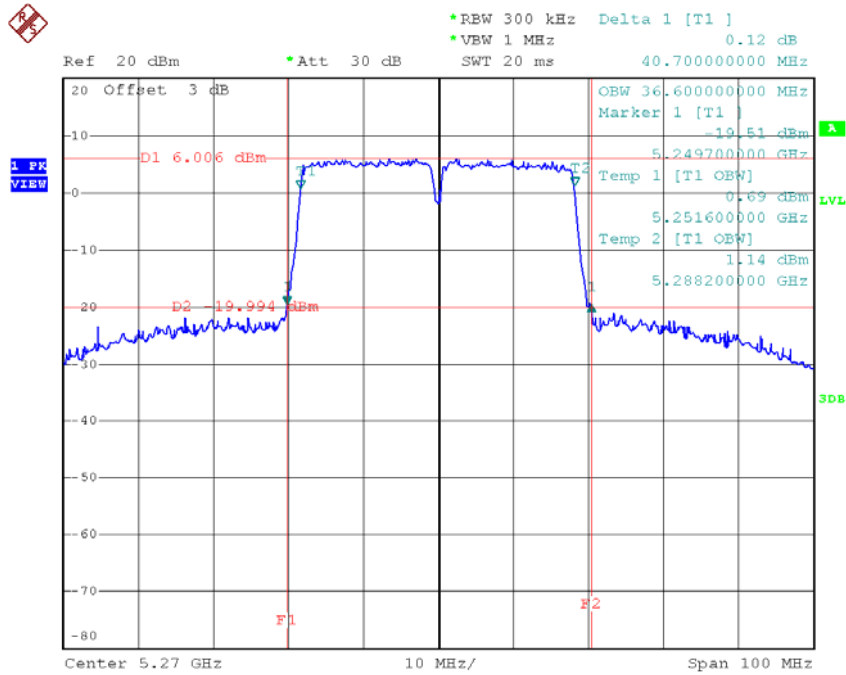

Date: 11.APR.2016 20:35:00

TX CH62

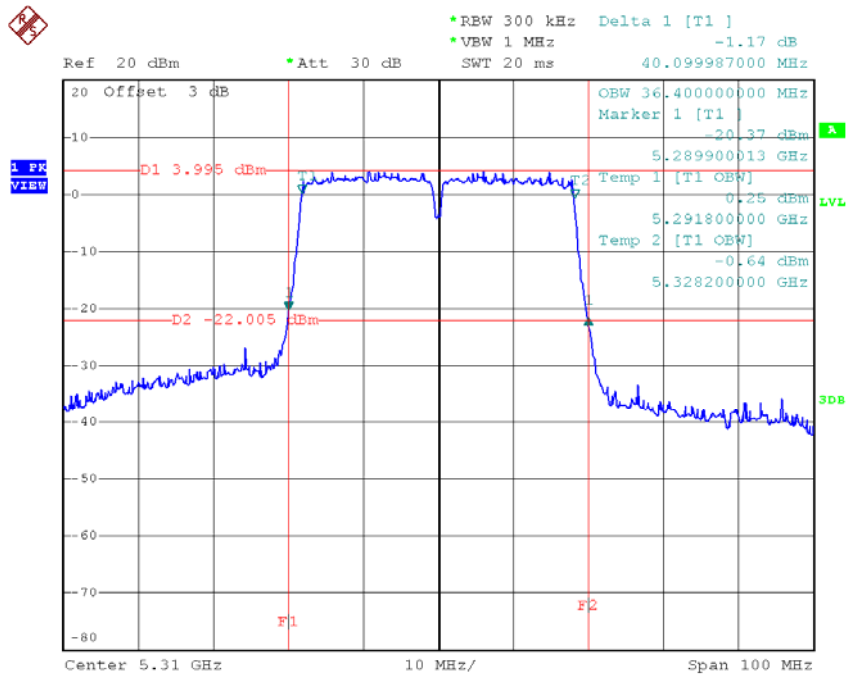


Date: 11.APR.2016 20:36:22

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.96	17.40
CH116	5580	19.00	16.80
CH140	5700	21.85	17.40

TX CH100

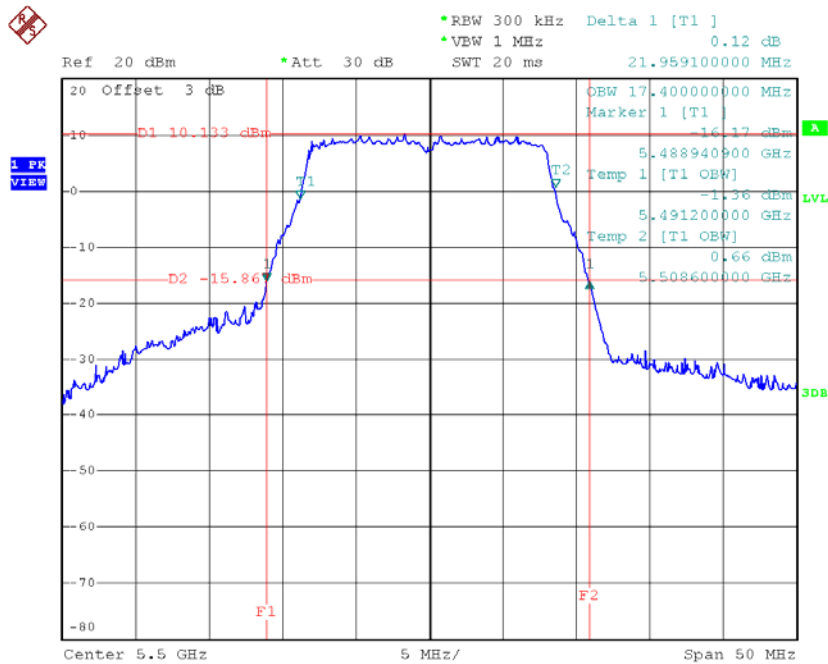


Date: 30.MAR.2016 17:59:22

TX CH116

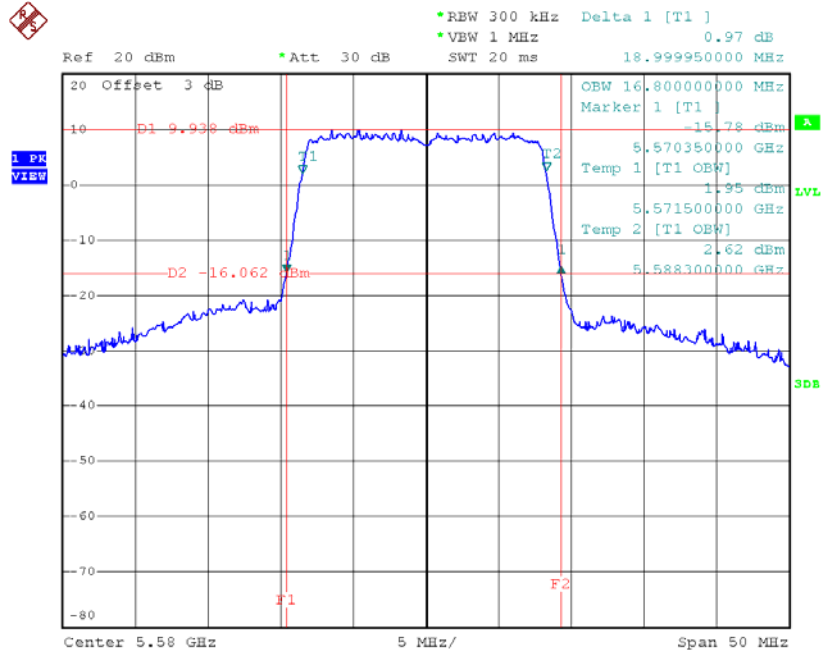

Date: 30.MAR.2016 18:00:43


TX CH140

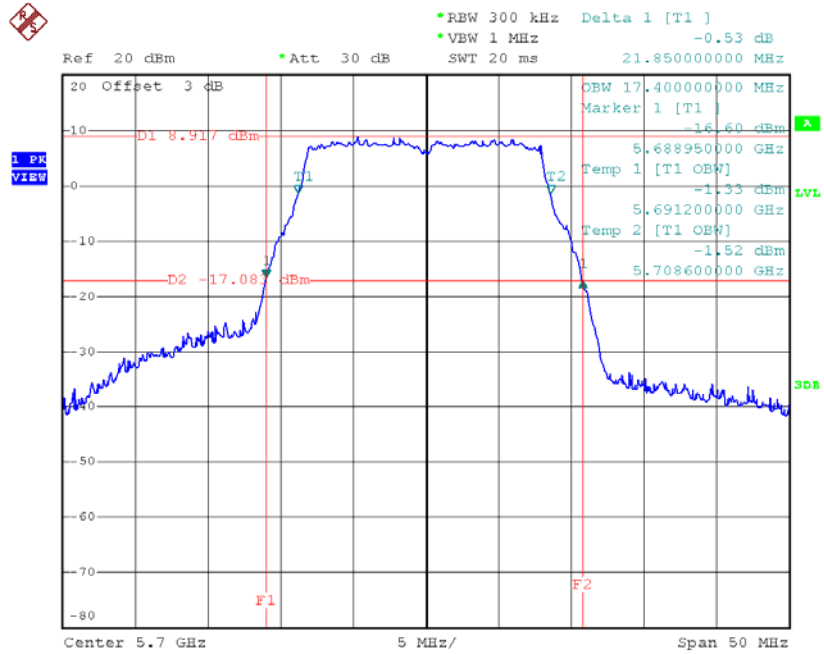

Date: 30.MAR.2016 18:01:41


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.05	18.40
CH116	5580	19.39	17.50
CH140	5700	22.20	18.30

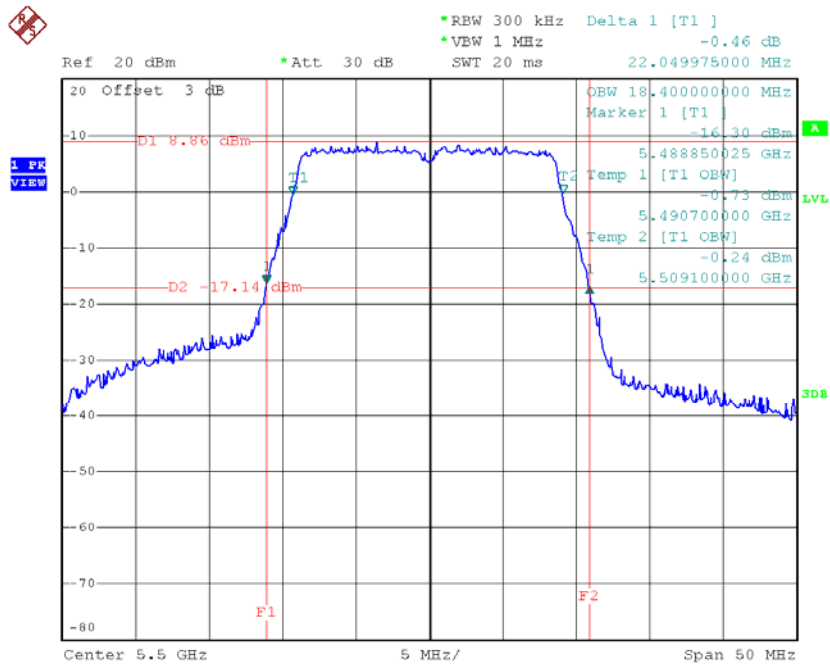TX CH100


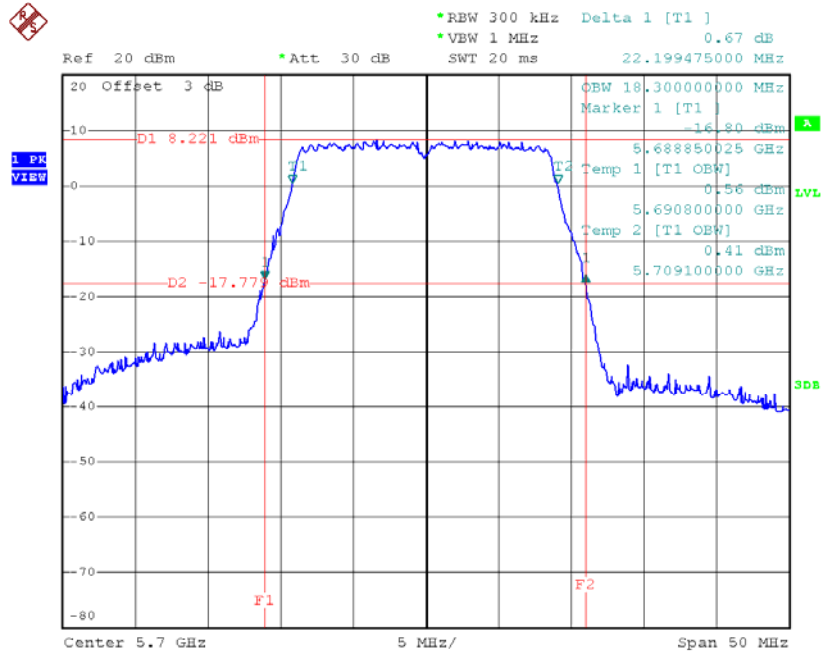
Date: 11.APR.2016 18:13:05

TX CH116

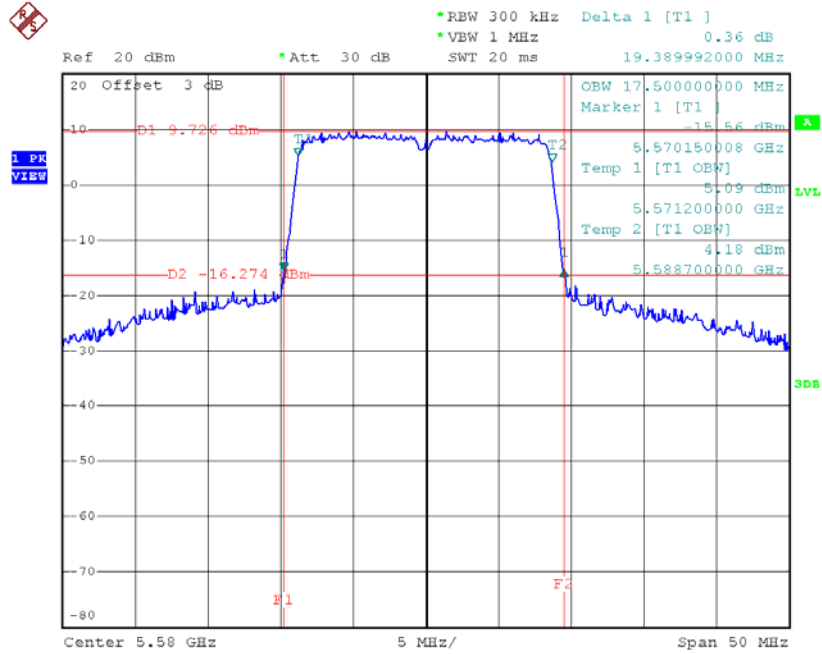

Date: 11.APR.2016 18:21:58

TX CH140




Date: 11.APR.2016 18:15:16

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.21	36.60
CH110	5550	40.20	36.60
CH134	5670	40.20	36.40

TX CH102

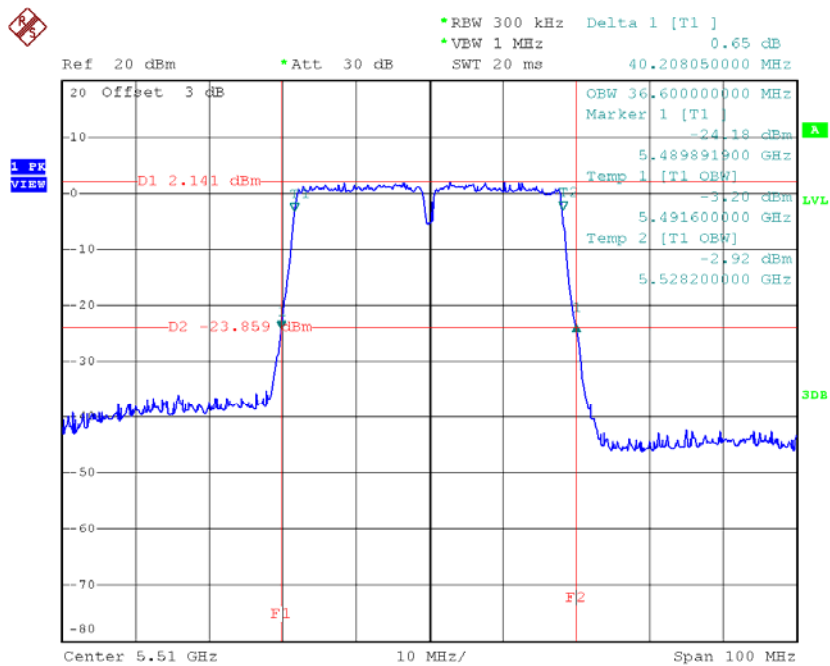


Date: 11.APR.2016 20:37:50

TX CH110

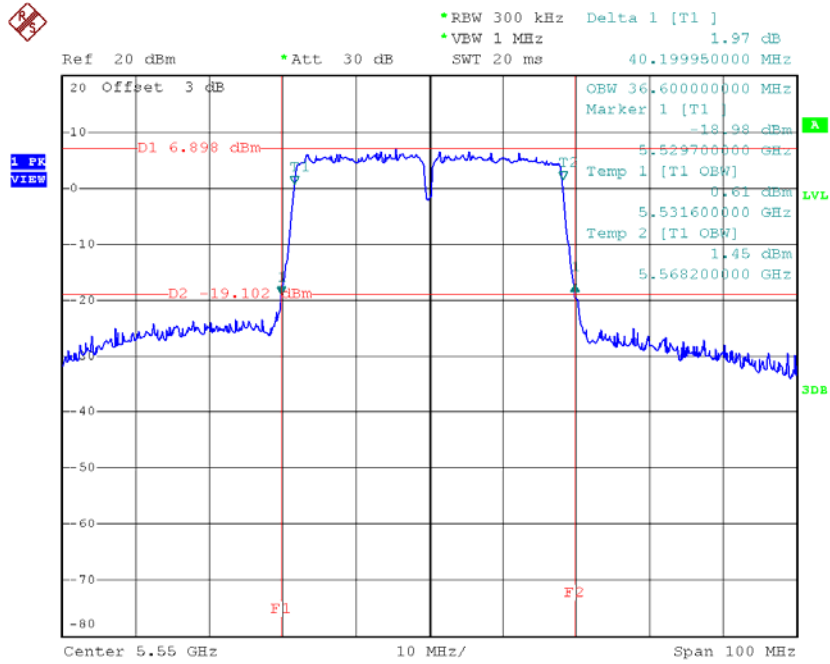

Date: 11.APR.2016 20:38:48

TX CH134

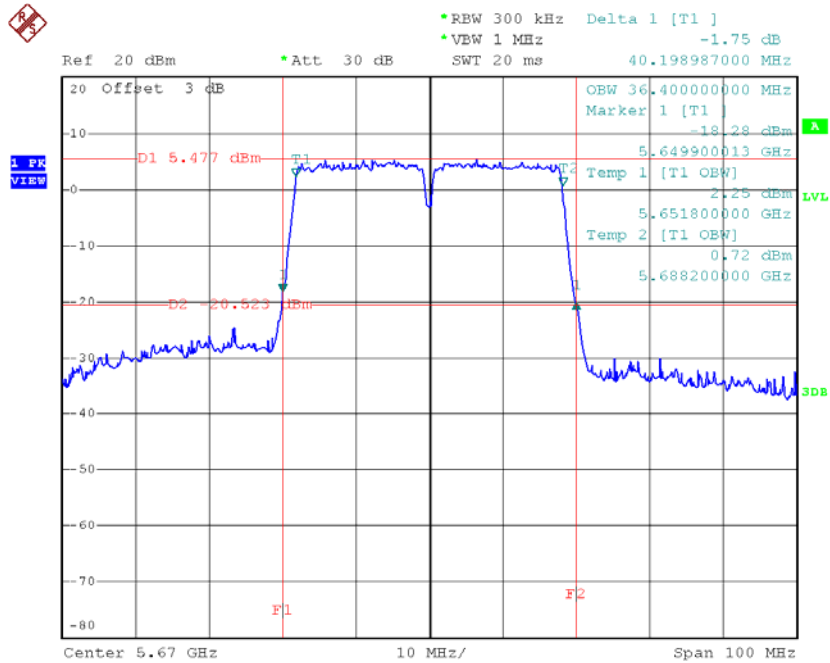


Date: 11.APR.2016 20:39:53

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.45	16.60	>=500
CH157	5785	16.45	17.10	>=500
CH165	5825	16.45	16.60	>=500

TX CH 149

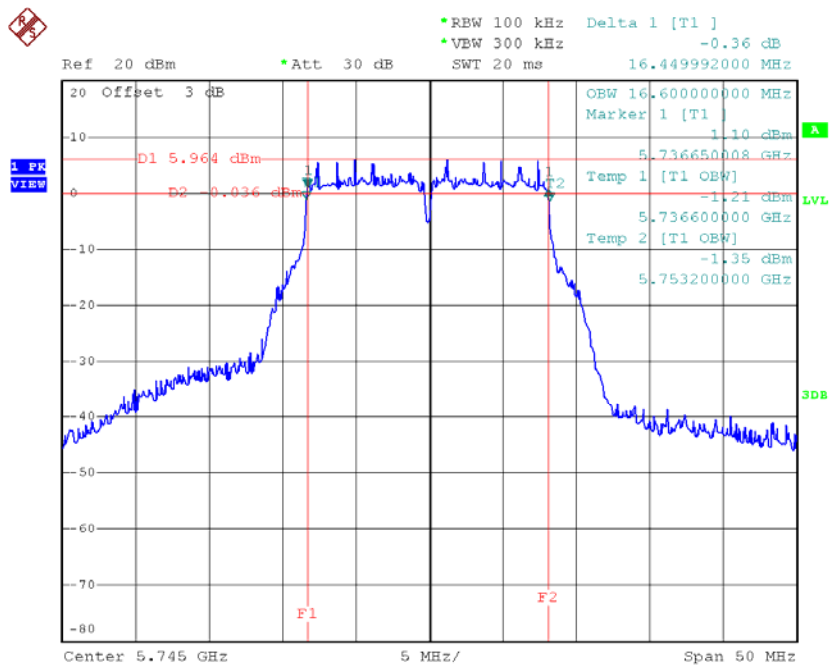


Date: 30.MAR.2016 18:02:52

TX CH 157

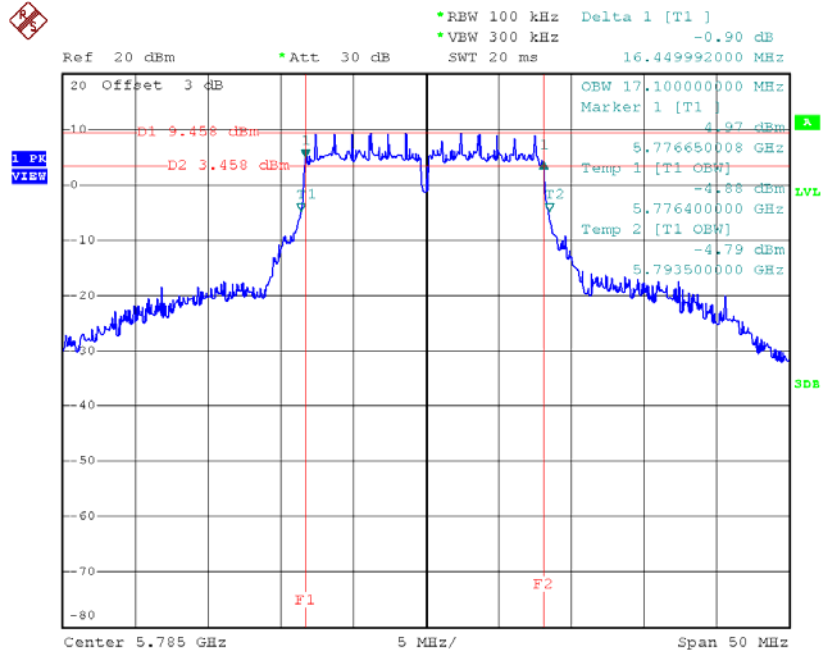

Date: 30.MAR.2016 18:03:46

TX CH 165

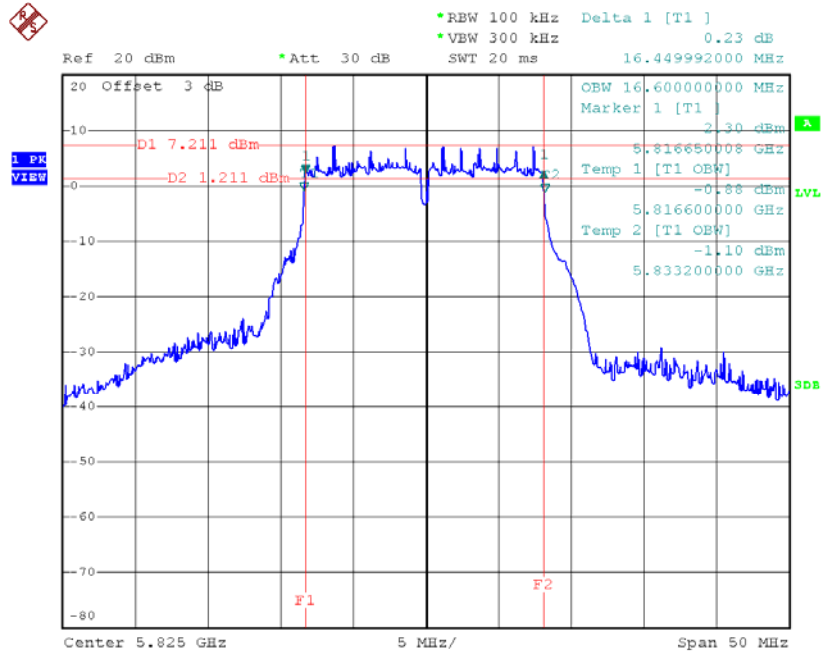


Date: 30.MAR.2016 18:04:50

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	17.80	>=500
CH157	5785	17.65	18.20	>=500
CH165	5825	17.65	17.80	>=500

TX CH 149

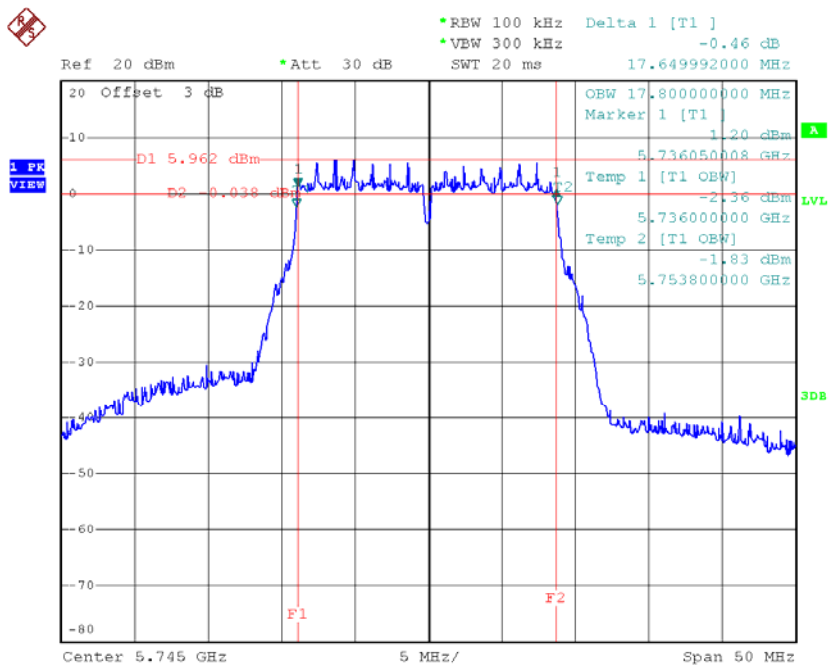


Date: 11.APR.2016 18:16:28

TX CH 157

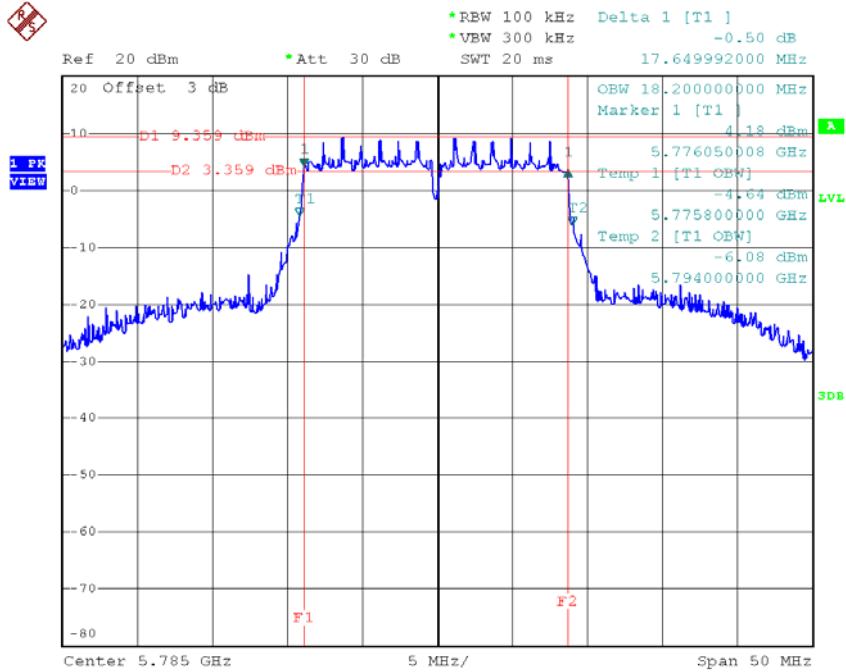

Date: 11.APR.2016 18:17:47

TX CH 165

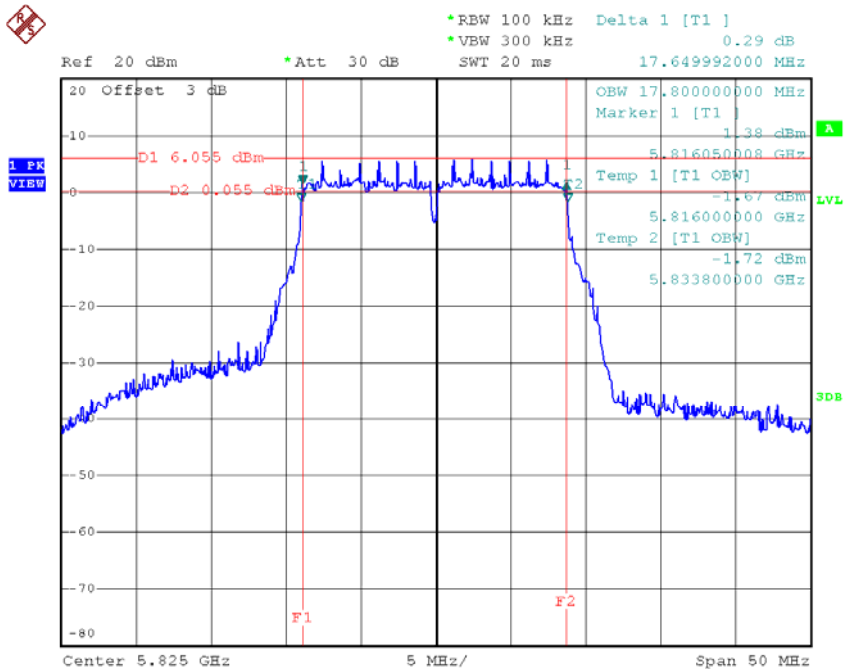


Date: 11.APR.2016 18:22:54

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.20	>=500
CH159	5795	36.50	36.20	>=500

TX CH 151

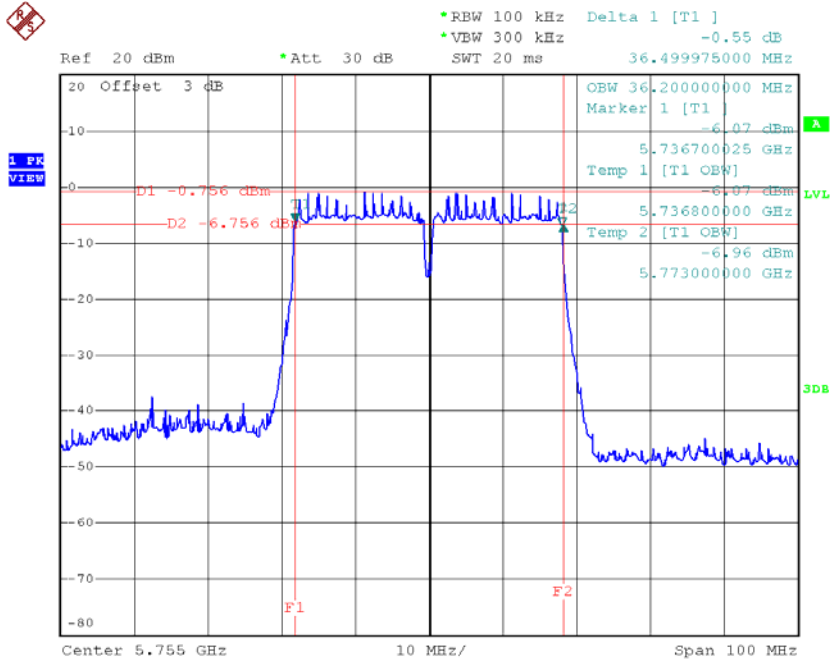

Date: 11.APR.2016 20:42:01

TX CH 159

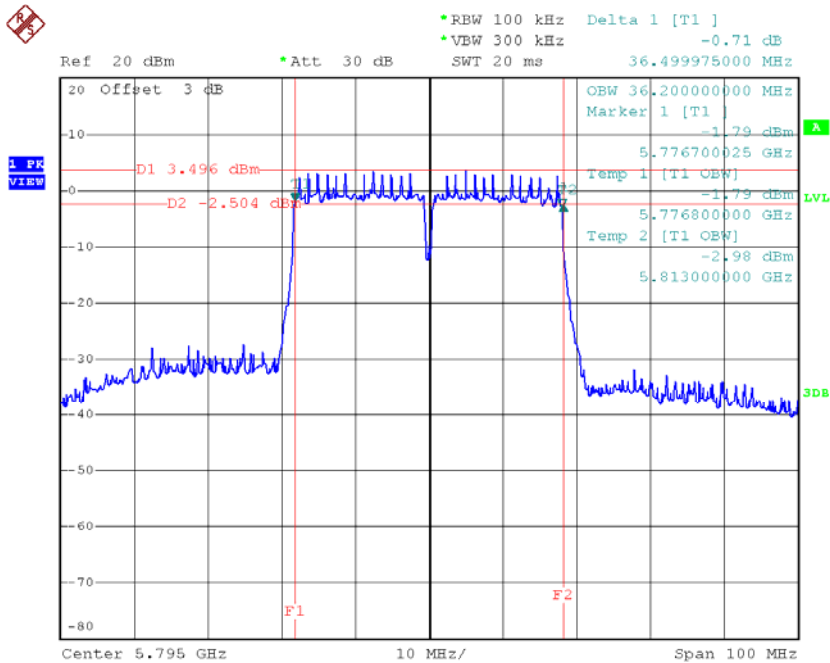


Date: 11.APR.2016 20:42:59

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.30	18.40
CH40	5200	22.19	18.50
CH48	5240	28.70	17.70

TX CH36

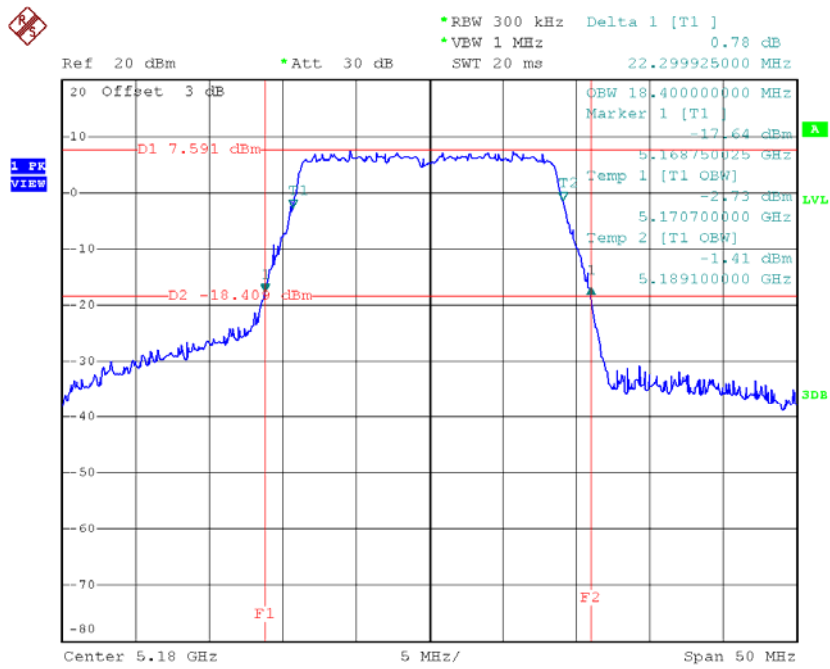


Date: 11.APR.2016 18:24:01

TX CH40

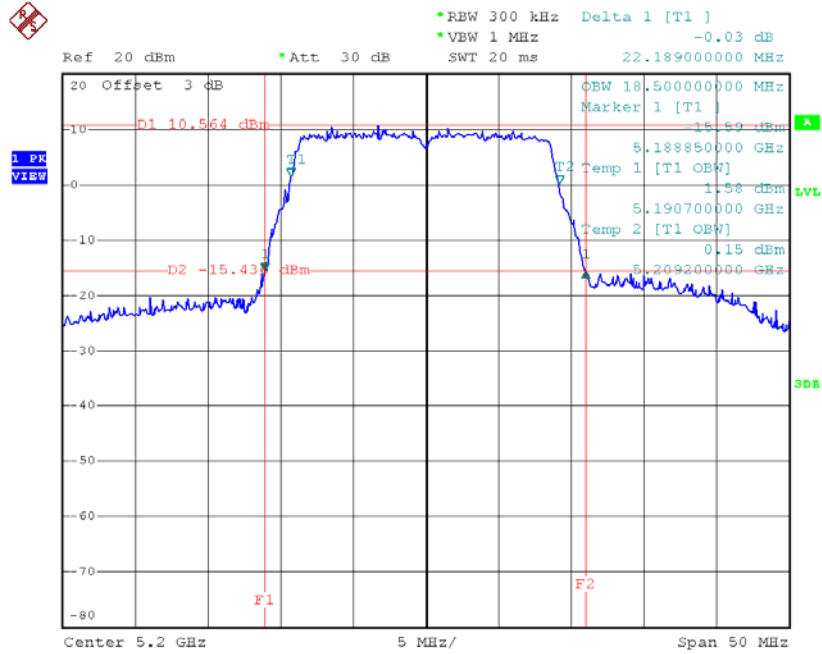

Date: 11.APR.2016 18:25:07

TX CH48

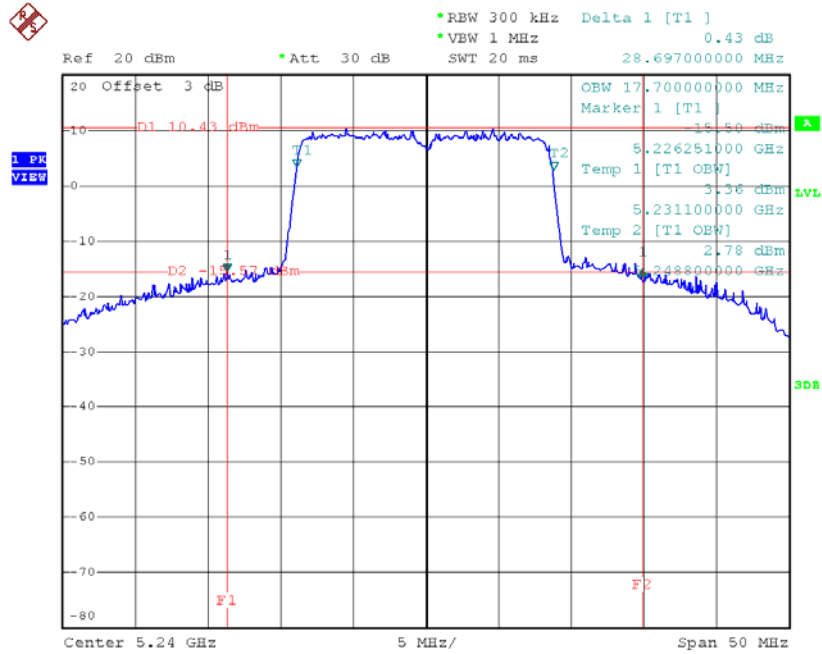


Date: 11.APR.2016 18:26:06

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.10	36.40
CH46	5230	83.70	37.80

TX CH38

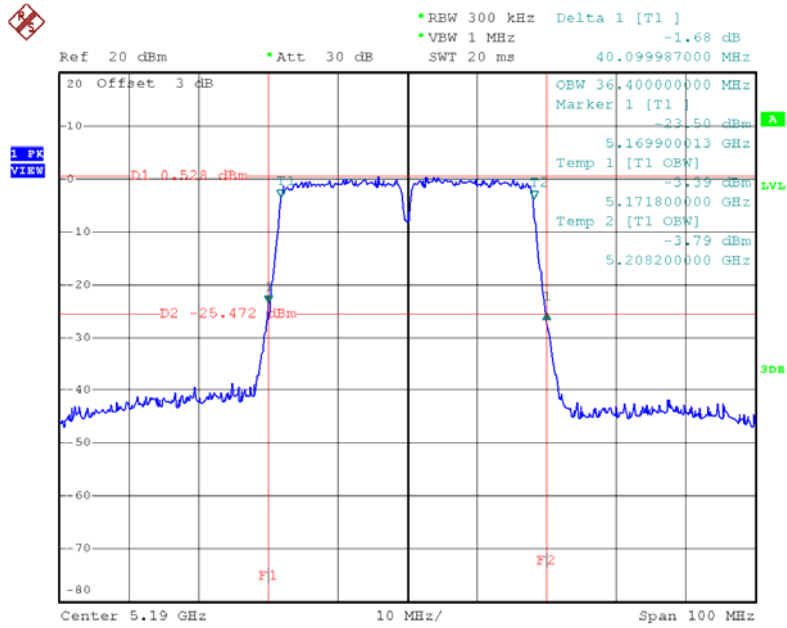

Date: 11.APR.2016 20:44:18

TX CH46

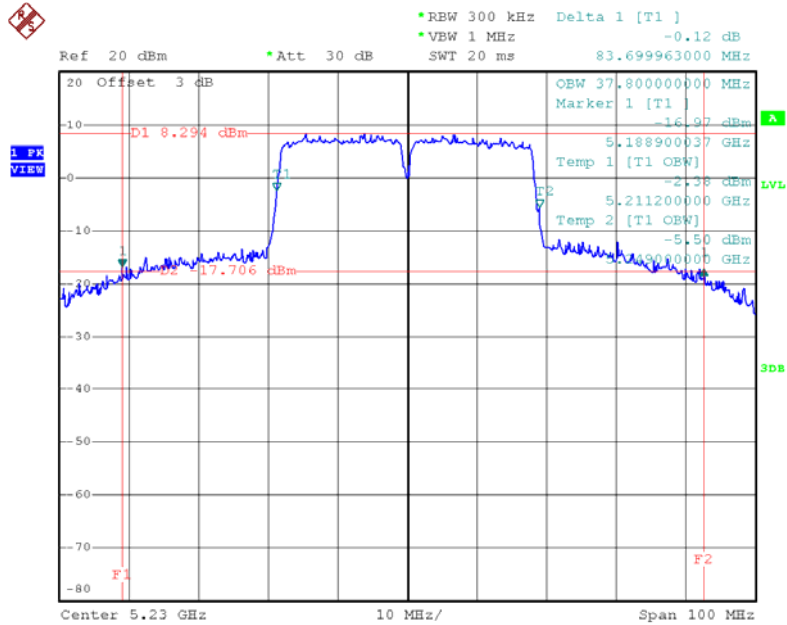


Date: 11.APR.2016 20:45:03

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.00	76.00

TX CH42

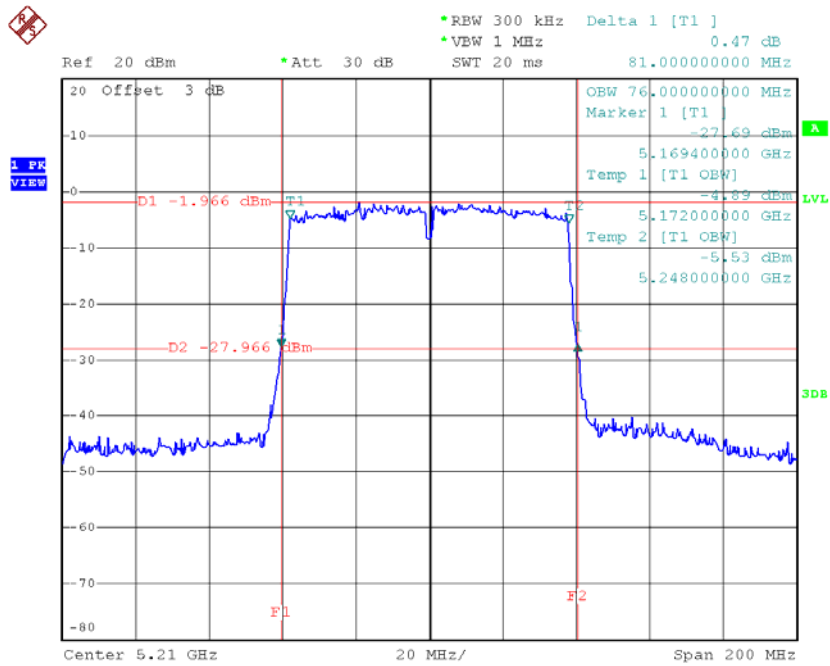


Date: 11.APR.2016 20:55:07

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.25	17.60
CH60	5300	22.20	18.40
CH64	5320	22.10	18.40

TX CH52

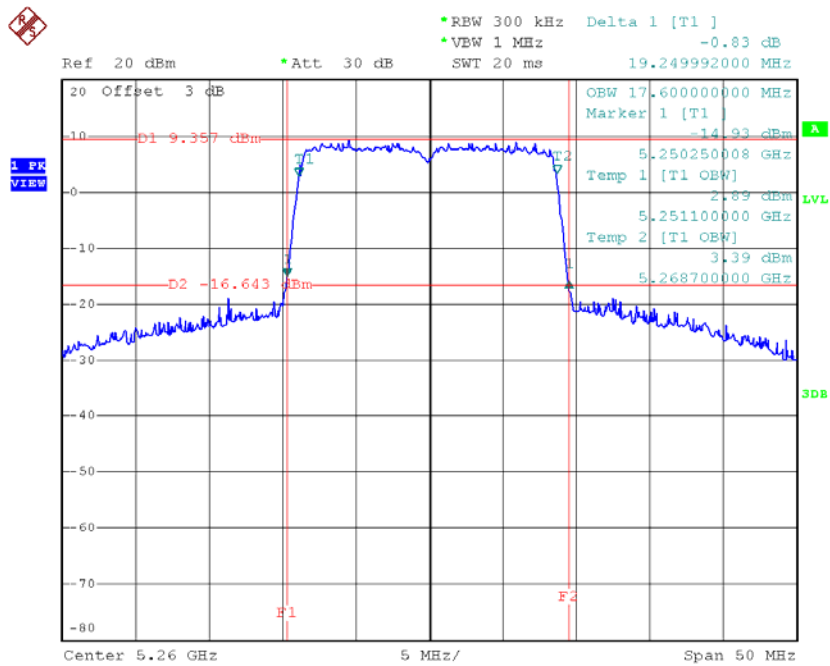


Date: 11.APR.2016 18:27:11

TX CH60

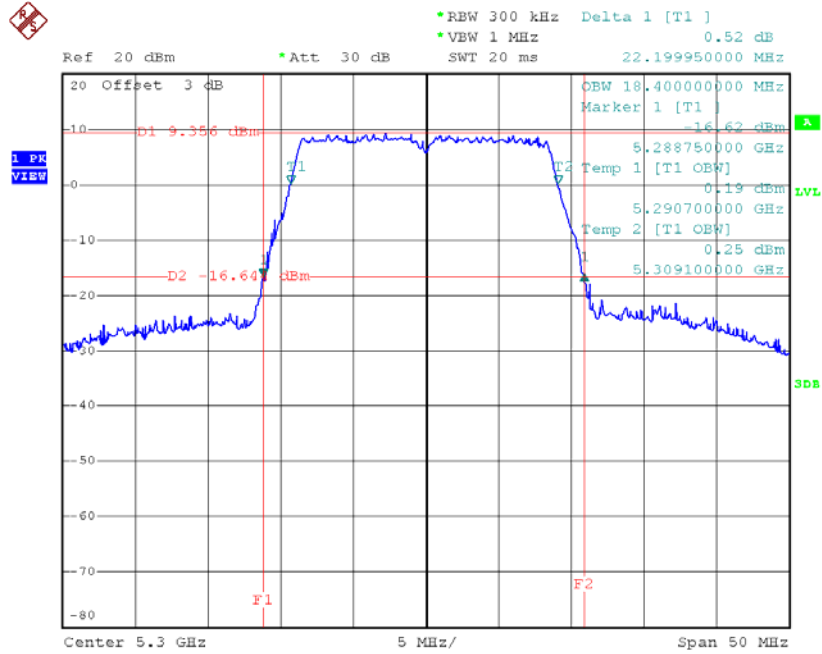

Date: 11.APR.2016 18:28:49

TX CH64

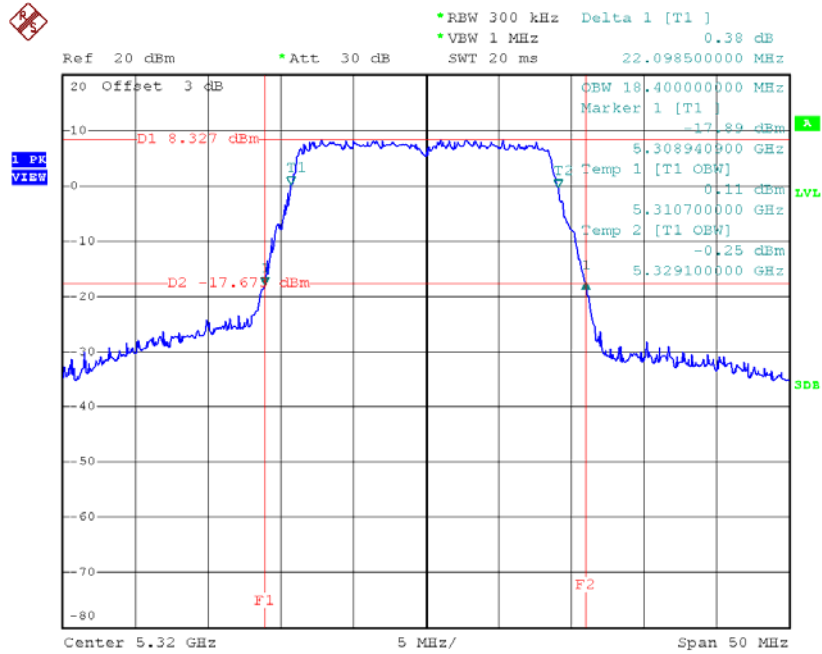

Date: 11.APR.2016 20:25:01


Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.70	36.60
CH62	5310	40.20	36.60

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	81.60	76.00

TX CH58

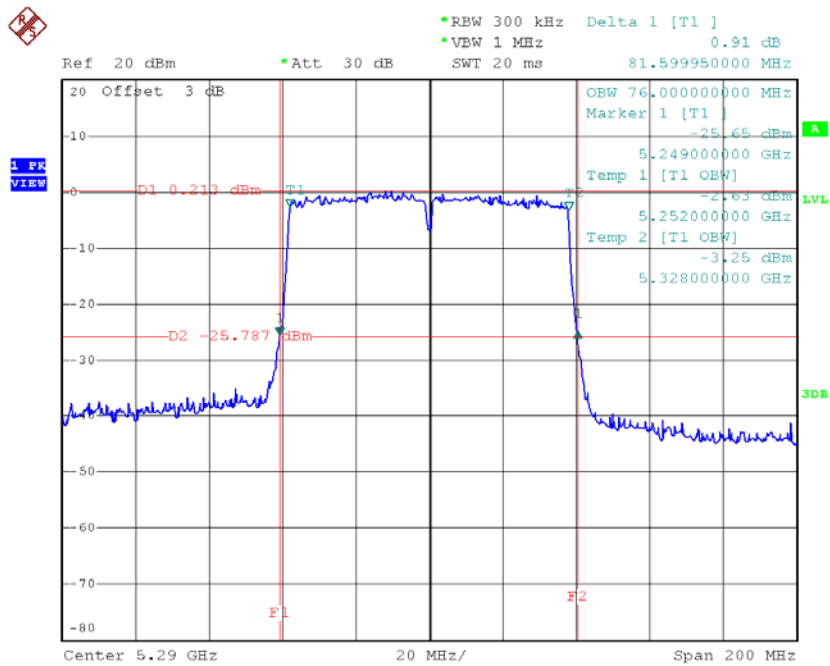


Date: 11.APR.2016 20:56:34

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.21	18.40
CH116	5580	19.40	17.60
CH140	5700	22.00	18.40

TX CH100

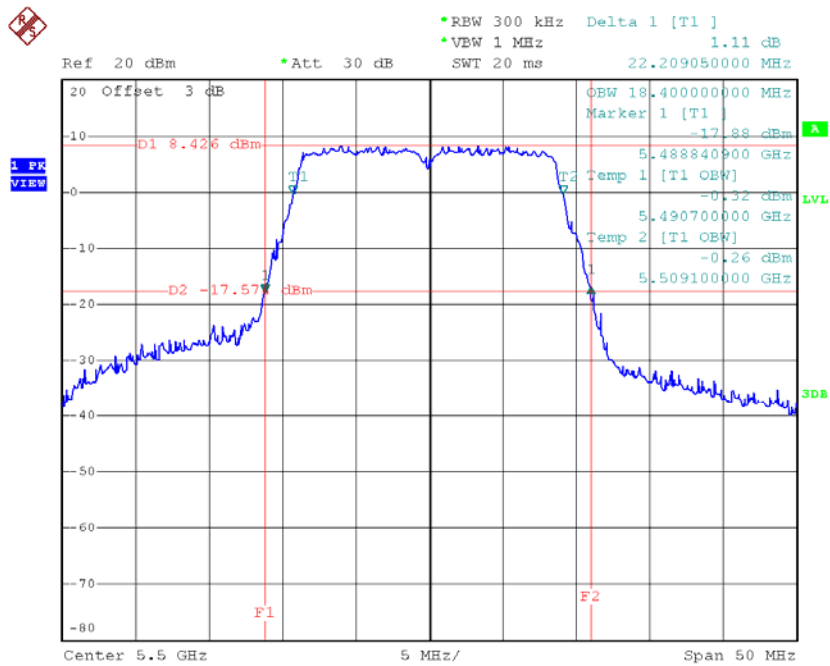


Date: 11.APR.2016 20:25:57

TX CH116

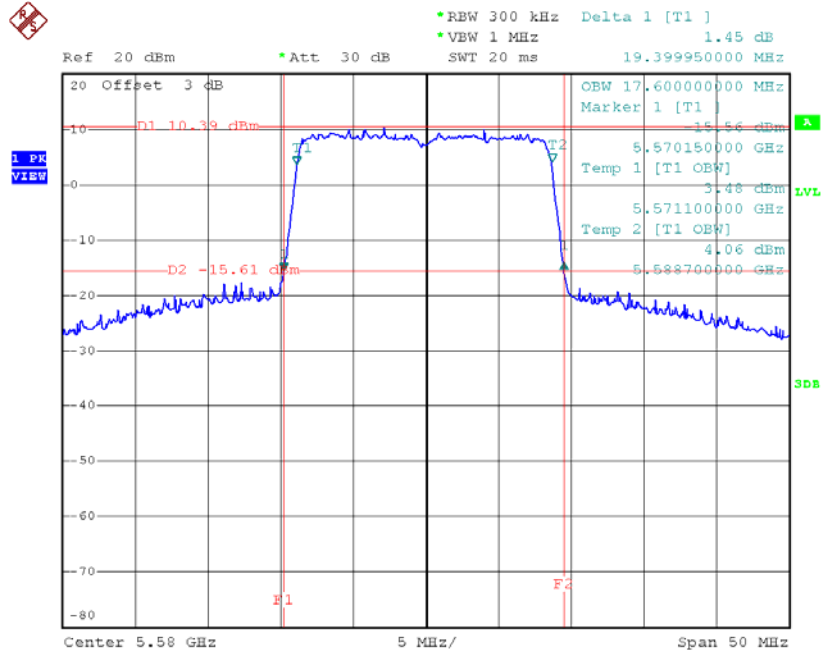

Date: 11.APR.2016 20:27:34

TX CH140

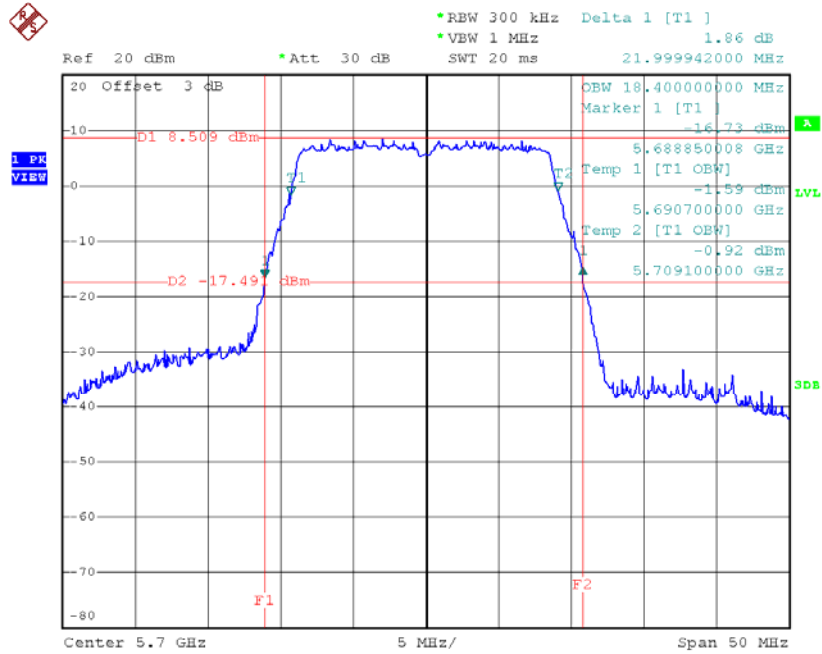


Date: 11.APR.2016 20:28:32

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.50	36.40
CH110	5550	40.19	36.60
CH134	5670	40.50	36.60

TX CH102

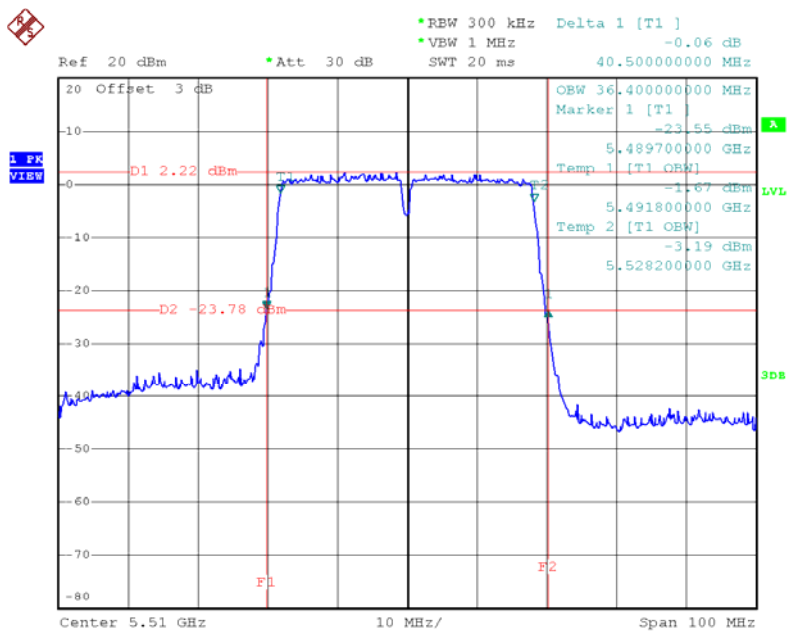


Date: 11.APR.2016 20:48:57

TX CH110

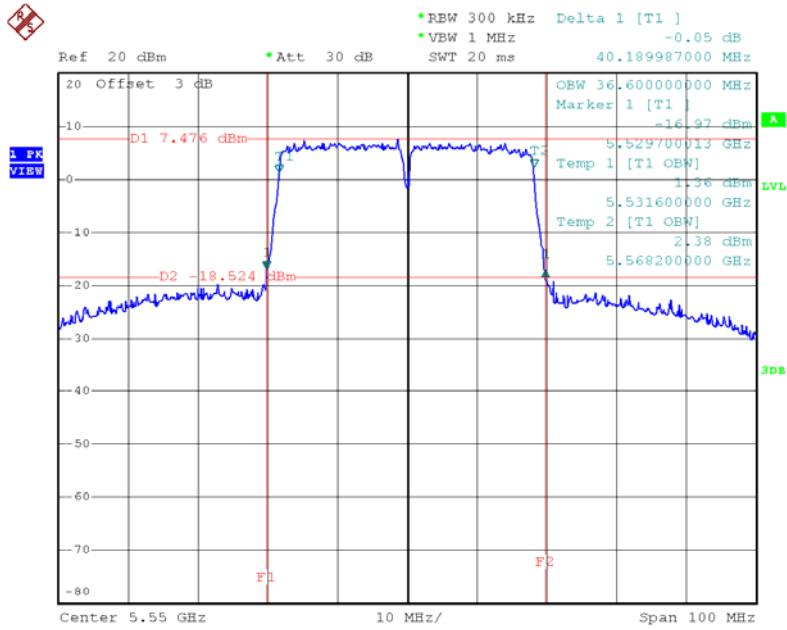

Date: 11.APR.2016 20:50:02

TX CH134

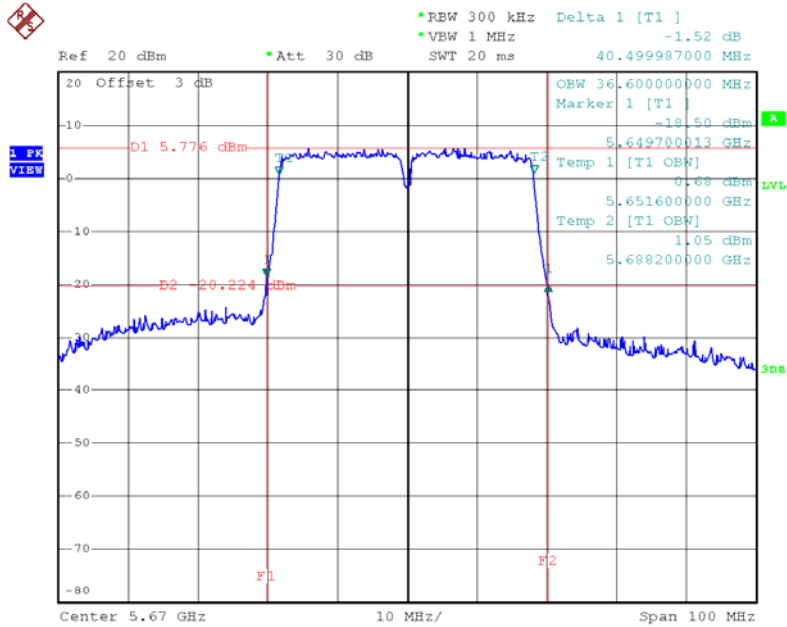


Date: 11.APR.2016 20:51:07

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	80.80	76.00
CH122	5610	95.40	76.40

TX CH106

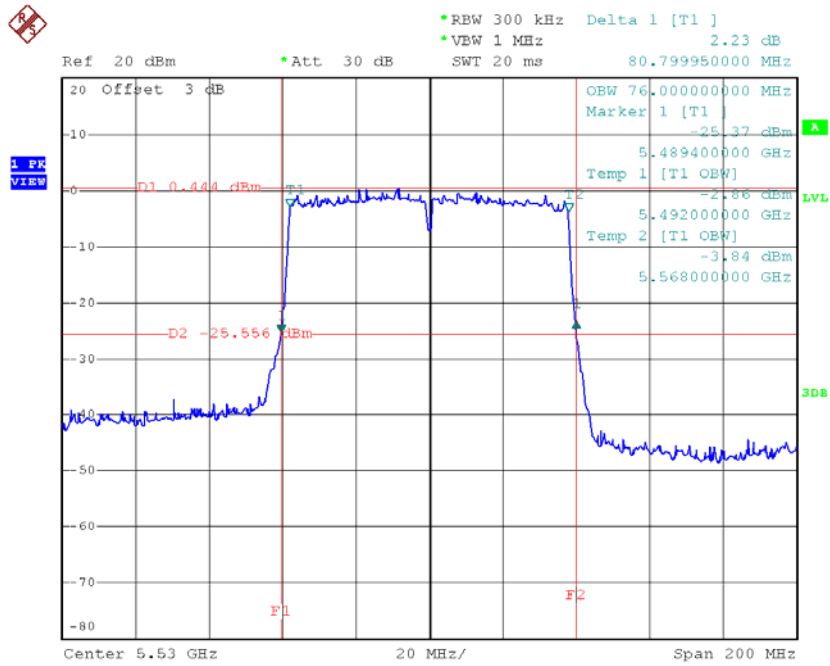

Date: 11.APR.2016 20:57:43

TX CH122

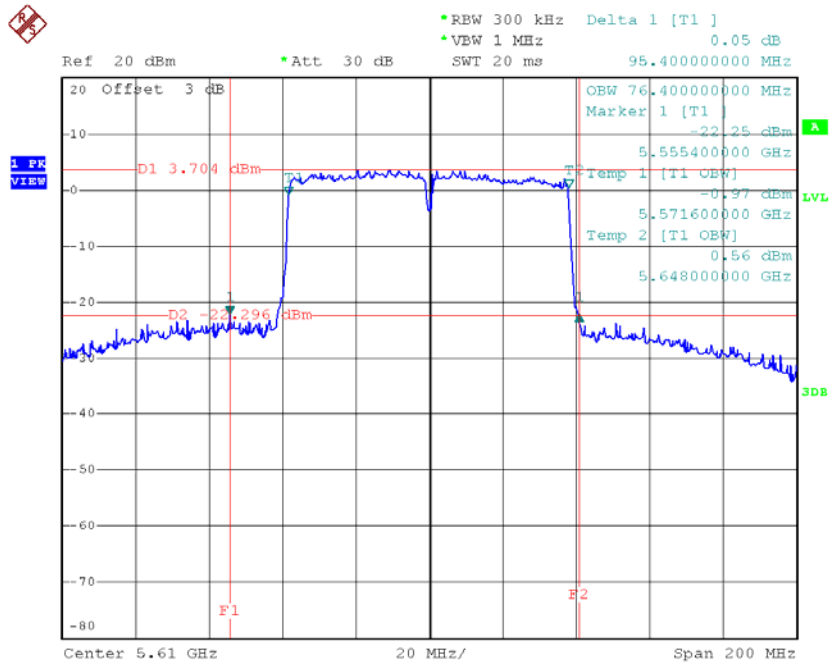


Date: 11.APR.2016 20:59:04

Test Mode: UNII-3/ TX AC20 Mode_ CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.70	17.80	>=500
CH157	5785	17.65	19.50	>=500
CH165	5825	17.65	17.80	>=500

TX CH 149

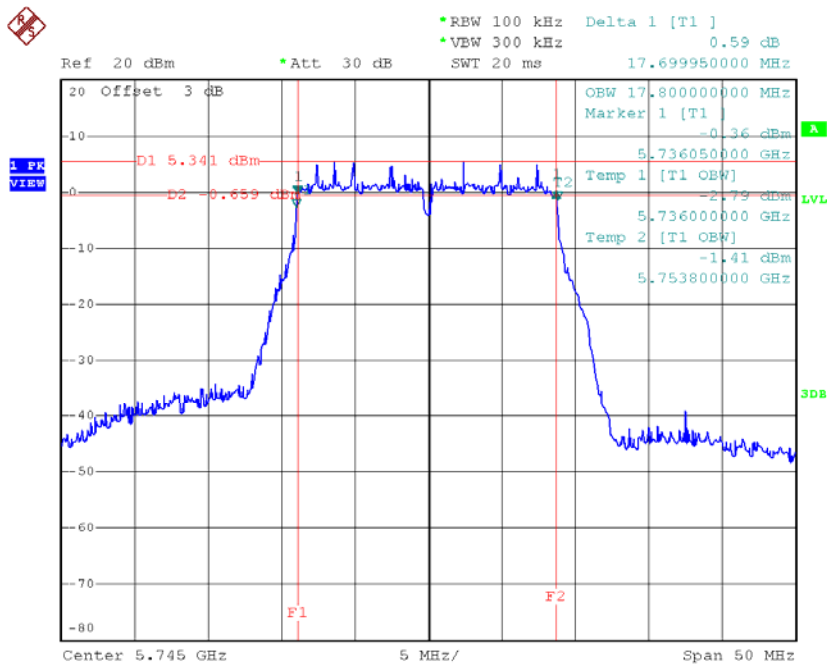


Date: 11.APR.2016 20:29:33

TX CH 157

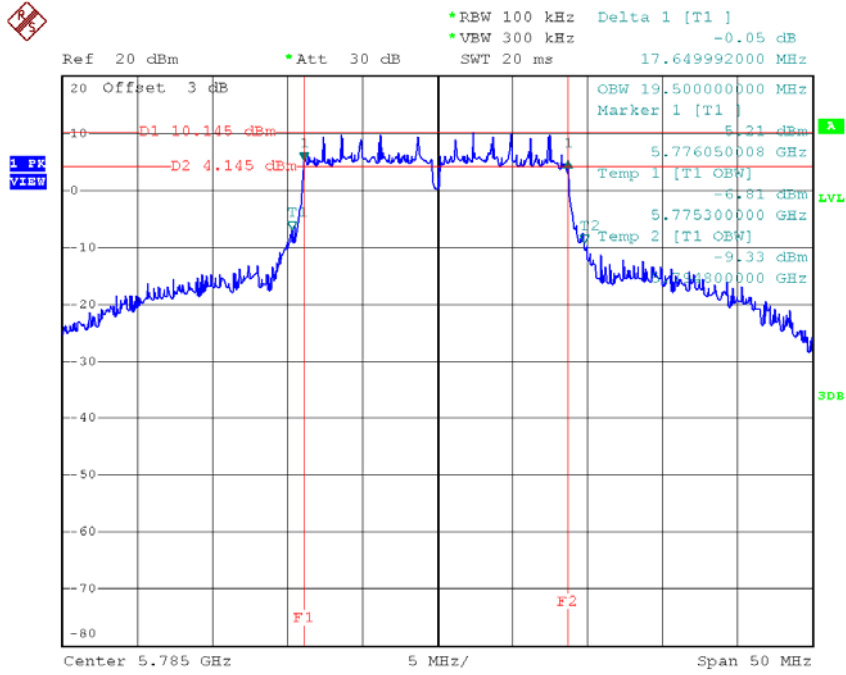

Date: 11.APR.2016 20:30:42

TX CH 165

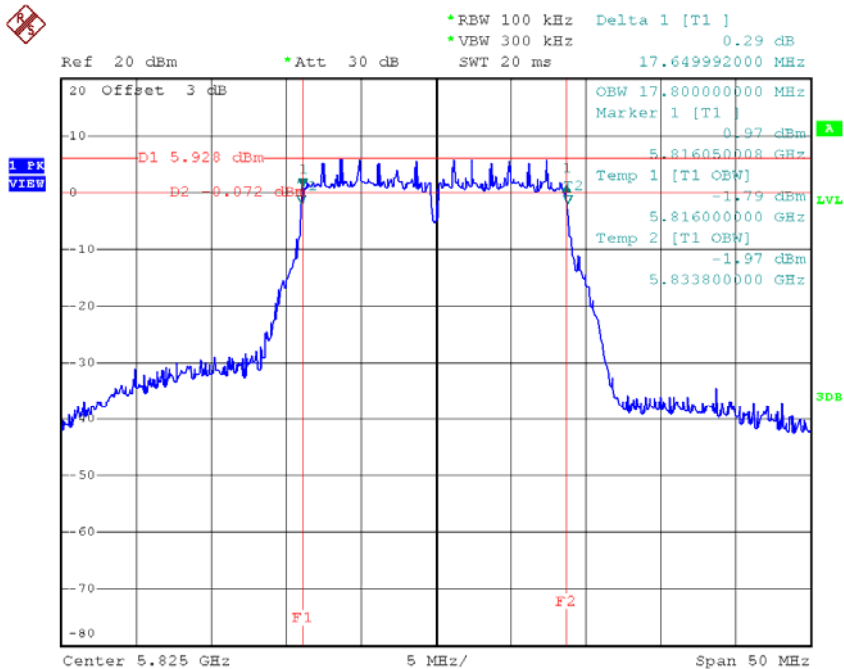


Date: 11.APR.2016 20:31:52

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.51	36.40	>=500
CH159	5795	36.50	36.20	>=500

TX CH 151

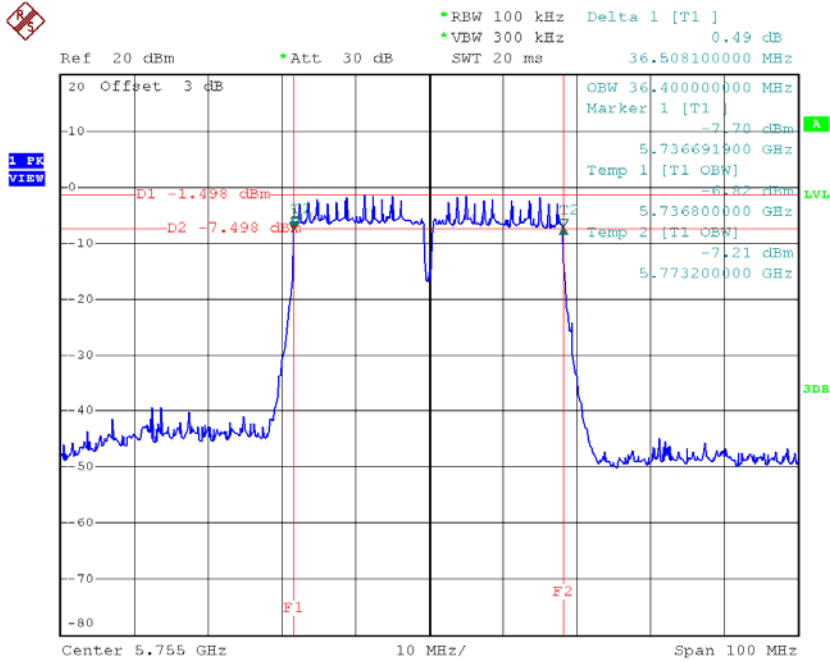

Date: 11.APR.2016 20:52:15

TX CH 159

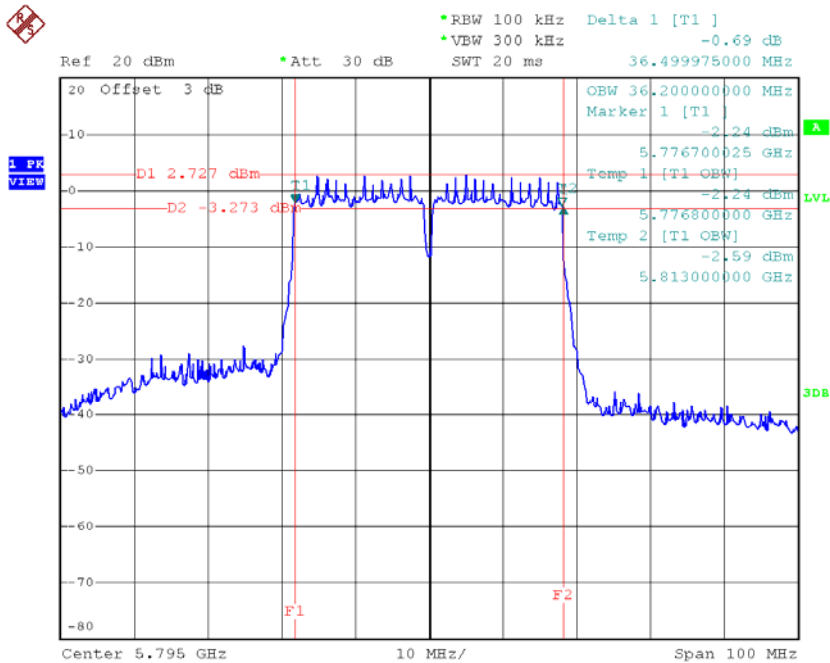


Date: 11.APR.2016 20:53:23

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.40	76.00	>=500

TX CH 155

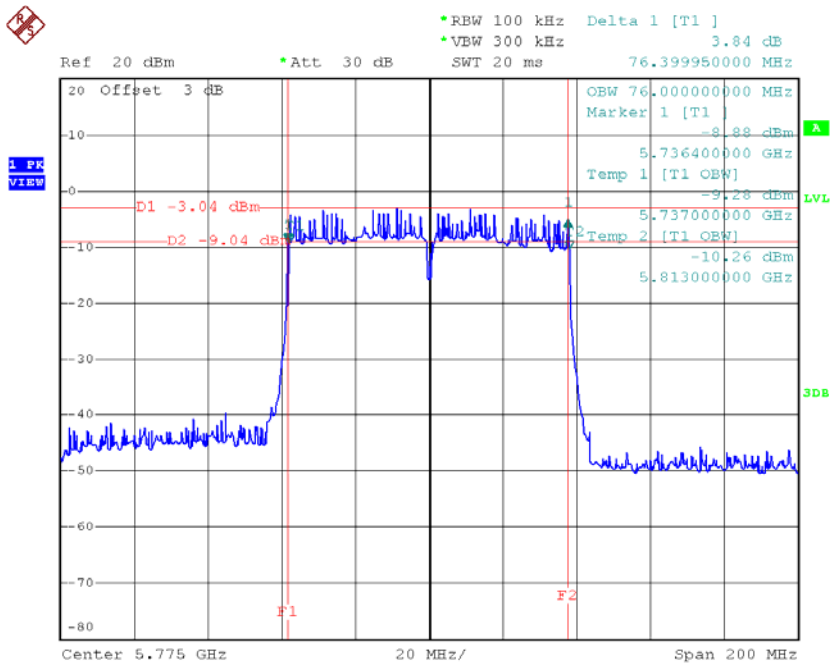

Date: 11.APR.2016 21:00:17

ATTACHMENT F - MAXIMUM OUTPUT POWER

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.82	0.25	19.07	24.00	0.25
CH40	5200	19.66	0.25	19.91	24.00	0.25
CH48	5240	19.53	0.25	19.78	24.00	0.25

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.79	0.25	19.04	24.00	0.25
CH40	5200	19.86	0.25	20.11	24.00	0.25
CH48	5240	19.72	0.25	19.97	24.00	0.25

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power(dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	22.07	24.00	0.25
CH40	5200	23.02	24.00	0.25
CH48	5240	22.89	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.03	0.46	18.49	24.00	0.25
CH40	5200	20.31	0.46	20.77	24.00	0.25
CH48	5240	21.17	0.46	21.63	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.65	0.46	18.11	24.00	0.25
CH40	5200	18.41	0.46	18.87	24.00	0.25
CH48	5240	18.72	0.46	19.18	24.00	0.25

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power(dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	21.31	24.00	0.25
CH40	5200	22.94	24.00	0.25
CH48	5240	23.59	24.00	0.25

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.10	1.25	15.35	24.00	0.25
CH46	5230	20.04	1.25	21.29	24.00	0.25

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.51	1.25	15.76	24.00	0.25
CH46	5230	18.26	1.25	19.51	24.00	0.25

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.57	24.00	0.25
CH46	5230	23.50	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.49	0.25	18.74	24.00	0.25
CH60	5300	18.55	0.25	18.80	24.00	0.25
CH64	5320	17.77	0.25	18.02	24.00	0.25

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.42	0.25	18.67	24.00	0.25
CH60	5300	18.66	0.25	18.91	24.00	0.25
CH64	5320	17.50	0.25	17.75	24.00	0.25

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.72	24.00	0.25
CH60	5300	21.87	24.00	0.25
CH64	5320	20.90	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.41	0.46	18.87	24.00	0.25
CH60	5300	18.32	0.46	18.78	24.00	0.25
CH64	5320	17.21	0.46	17.67	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.35	0.46	18.81	24.00	0.25
CH60	5300	18.29	0.46	18.75	24.00	0.25
CH64	5320	17.28	0.46	17.74	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.85	24.00	0.25
CH60	5300	21.78	24.00	0.25
CH64	5320	20.72	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.12	1.25	19.37	24.00	0.25
CH62	5310	15.75	1.25	17.00	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.04	1.25	19.29	24.00	0.25
CH62	5310	15.20	1.25	16.45	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	22.34	24.00	0.25
CH62	5310	19.74	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.31	0.25	18.56	24.00	0.25
CH116	5580	18.64	0.25	18.89	24.00	0.25
CH140	5700	16.35	0.25	16.60	24.00	0.25

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.45	0.25	18.70	24.00	0.25
CH116	5580	18.57	0.25	18.82	24.00	0.25
CH140	5700	15.32	0.25	15.57	24.00	0.25

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	21.64	24.00	0.25
CH116	5580	21.87	24.00	0.25
CH140	5700	19.13	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.69	0.46	18.15	24.00	0.25
CH116	5580	18.24	0.46	18.70	24.00	0.25
CH140	5700	16.28	0.46	16.74	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.38	0.46	18.84	24.00	0.25
CH116	5580	18.45	0.46	18.91	24.00	0.25
CH140	5700	15.47	0.46	15.93	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	21.52	24.00	0.25
CH116	5580	21.82	24.00	0.25
CH140	5700	19.36	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.50	1.25	15.75	24.00	0.25
CH110	5550	18.02	1.25	19.27	24.00	0.25
CH134	5670	16.57	1.25	17.82	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.20	1.25	14.45	24.00	0.25
CH110	5550	16.34	1.25	17.59	24.00	0.25
CH134	5670	15.01	1.25	16.26	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	18.16	24.00	0.25
CH110	5550	21.52	24.00	0.25
CH134	5670	20.12	24.00	0.25

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.58	0.25	16.83	30.00	1.00
CH157	5785	19.37	0.25	19.62	30.00	1.00
CH165	5825	18.36	0.25	18.61	30.00	1.00

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.87	0.25	17.12	30.00	1.00
CH157	5785	21.09	0.25	21.34	30.00	1.00
CH165	5825	18.82	0.25	19.07	30.00	1.00

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.99	30.00	1.00
CH157	5785	23.57	30.00	1.00
CH165	5825	21.86	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.44	0.46	16.90	30.00	1.00
CH157	5785	19.54	0.46	20.00	30.00	1.00
CH165	5825	17.51	0.46	17.97	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	17.12	0.46	17.58	30.00	1.00
CH157	5785	20.34	0.46	20.80	30.00	1.00
CH165	5825	18.24	0.46	18.70	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.26	30.00	1.00
CH157	5785	23.43	30.00	1.00
CH165	5825	21.36	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	12.44	1.25	13.69	30.00	1.00
CH159	5795	17.30	1.25	18.55	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.25	1.25	14.50	30.00	1.00
CH159	5795	18.30	1.25	19.55	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.12	30.00	1.00
CH159	5795	22.09	30.00	1.00

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	17.94	0.22	18.16	24.00	0.25
CH40	5200	20.43	0.22	20.65	24.00	0.25
CH48	5240	20.44	0.22	20.66	24.00	0.25

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.49	0.22	18.71	24.00	0.25
CH40	5200	19.11	0.22	19.33	24.00	0.25
CH48	5240	19.26	0.22	19.48	24.00	0.25

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	21.45	24.00	0.25
CH40	5200	23.05	24.00	0.25
CH48	5240	23.12	24.00	0.25

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.71	0.73	14.44	24.00	1.00
CH46	5230	20.13	0.73	20.86	24.00	1.00

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.28	0.73	15.01	24.00	1.00
CH46	5230	18.45	0.73	19.18	24.00	1.00

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.74	24.00	1.00
CH46	5230	23.11	24.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.15	1.46	16.61	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.30	1.46	16.76	24.00	0.25

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	19.70	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.56	0.22	18.78	24.00	0.25
CH60	5300	18.72	0.22	18.94	24.00	0.25
CH64	5320	17.72	0.22	17.94	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.71	0.22	18.93	24.00	0.25
CH60	5300	18.56	0.22	18.78	24.00	0.25
CH64	5320	17.69	0.22	17.91	24.00	0.25

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.87	24.00	0.25
CH60	5300	21.87	24.00	0.25
CH64	5320	20.94	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.52	0.73	19.25	24.00	0.25
CH62	5310	15.82	0.73	16.55	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.24	0.73	18.97	24.00	0.25
CH62	5310	15.10	0.73	15.83	24.00	0.25

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	22.12	24.00	0.25
CH62	5310	19.22	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	16.21	1.46	17.67	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	15.61	1.46	17.07	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	20.39	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.81	0.22	18.03	24.00	0.25
CH116	5580	18.64	0.22	18.86	24.00	0.25
CH140	5700	16.21	0.22	16.43	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	17.72	0.22	17.94	24.00	0.25
CH116	5580	18.62	0.22	18.84	24.00	0.25
CH140	5700	15.46	0.22	15.68	24.00	0.25

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	21.00	24.00	0.25
CH116	5580	21.86	24.00	0.25
CH140	5700	19.08	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.51	0.73	15.24	24.00	0.25
CH110	5550	18.61	0.73	19.34	24.00	0.25
CH134	5670	16.61	0.73	17.34	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	13.16	0.73	13.89	24.00	0.25
CH110	5550	18.09	0.73	18.82	24.00	0.25
CH134	5670	15.22	0.73	15.95	24.00	0.25

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	17.63	24.00	0.25
CH110	5550	22.10	24.00	0.25
CH134	5670	19.71	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.74	1.46	17.20	24.00	0.25
CH122	5610	18.21	1.46	19.67	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	14.77	1.46	16.23	24.00	0.25
CH122	5610	16.72	1.46	18.18	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	19.75	24.00	0.25
CH122	5610	22.00	24.00	0.25

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.30	0.22	16.52	30.00	1.00
CH157	5785	19.89	0.22	20.11	30.00	1.00
CH165	5825	17.70	0.22	17.92	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.80	0.22	17.02	30.00	1.00
CH157	5785	20.43	0.22	20.65	30.00	1.00
CH165	5825	18.22	0.22	18.44	30.00	1.00

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.79	30.00	1.00
CH157	5785	23.40	30.00	1.00
CH165	5825	21.20	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	11.99	0.73	12.72	30.00	1.00
CH159	5795	16.88	0.73	17.61	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	12.64	0.73	13.37	30.00	1.00
CH159	5795	17.81	0.73	18.54	30.00	1.00

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	16.07	30.00	1.00
CH159	5795	21.11	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.57	1.46	15.03	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	14.06	1.46	15.52	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	18.29	30.00	1.00

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode: UNII-1/TX A Mode_ANT 1

TX mode CH36

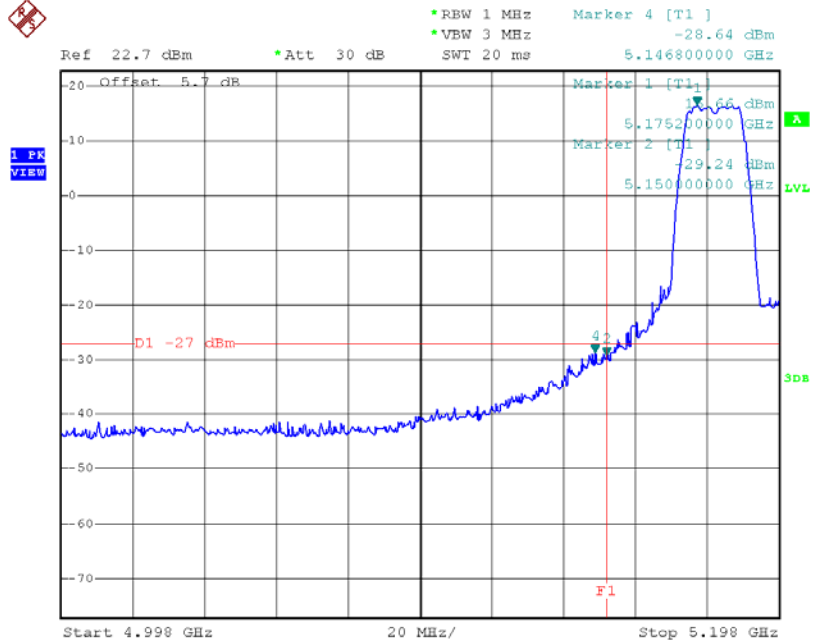

Date: 25.MAR.2016 14:54:07


TX mode CH48

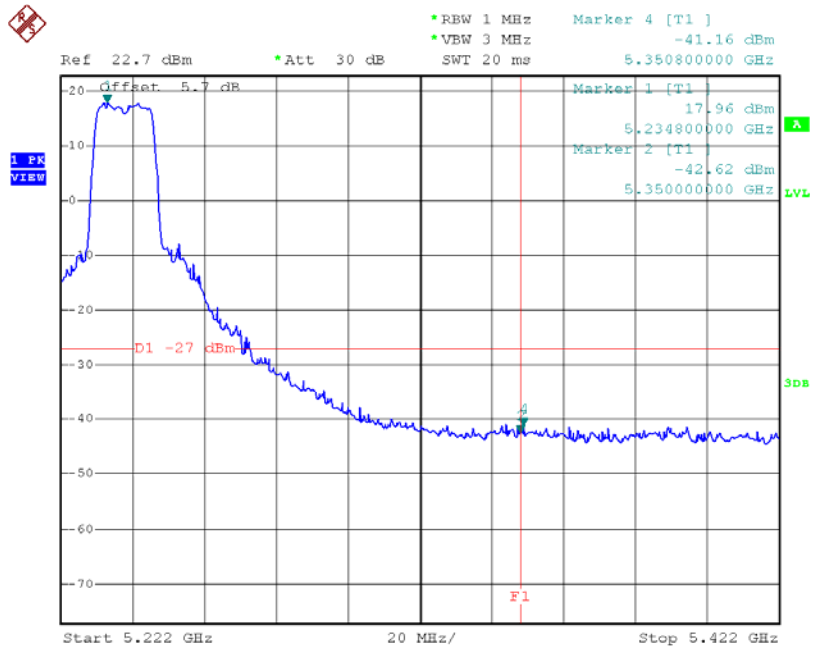

Date: 25.MAR.2016 14:54:40


Test Mode: UNII-1/TX A Mode_ANT 2

TX mode CH36

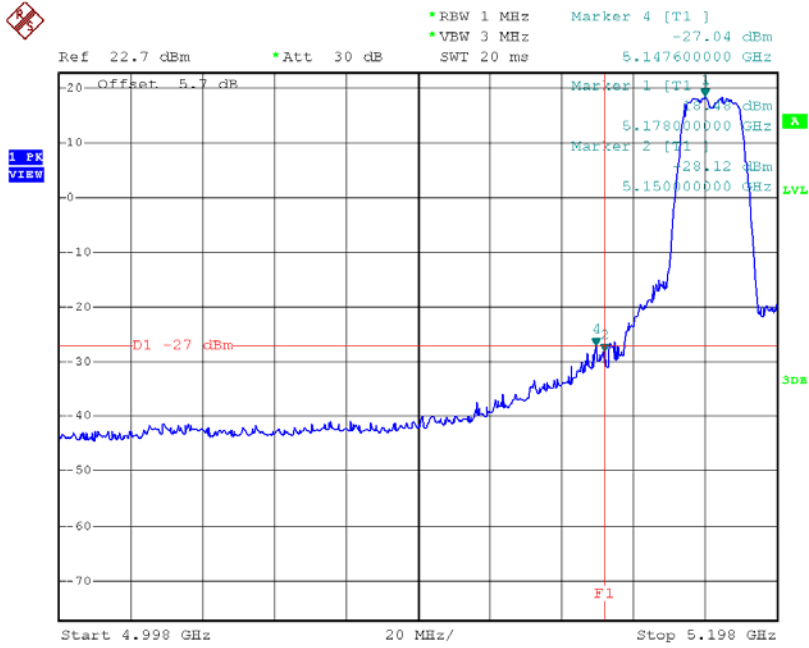

Date: 6.APR.2016 18:14:26


TX mode CH48

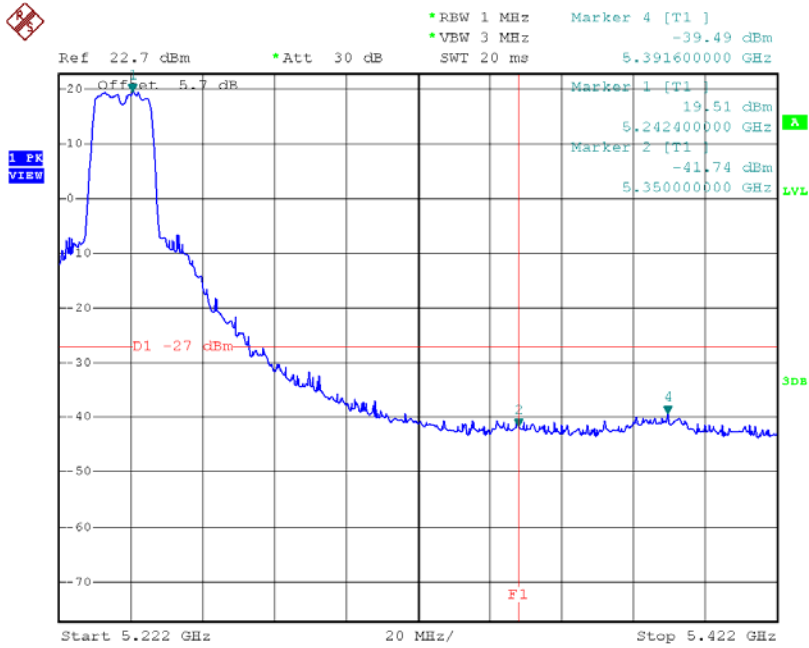

Date: 6.APR.2016 18:17:00


Test Mode: UNII-1/TX N20 Mode_ANT 1

TX mode CH36

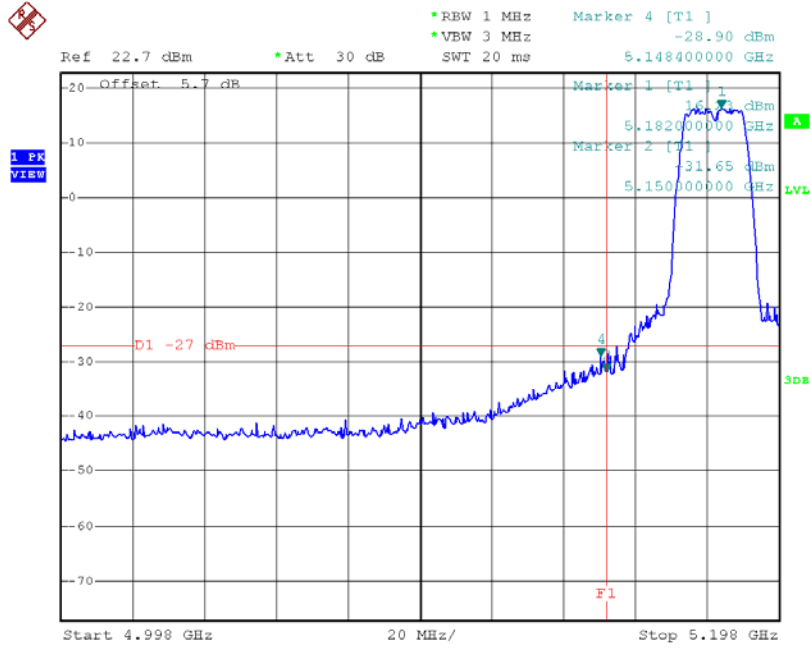

Date: 25.MAR.2016 14:58:49


TX mode CH48

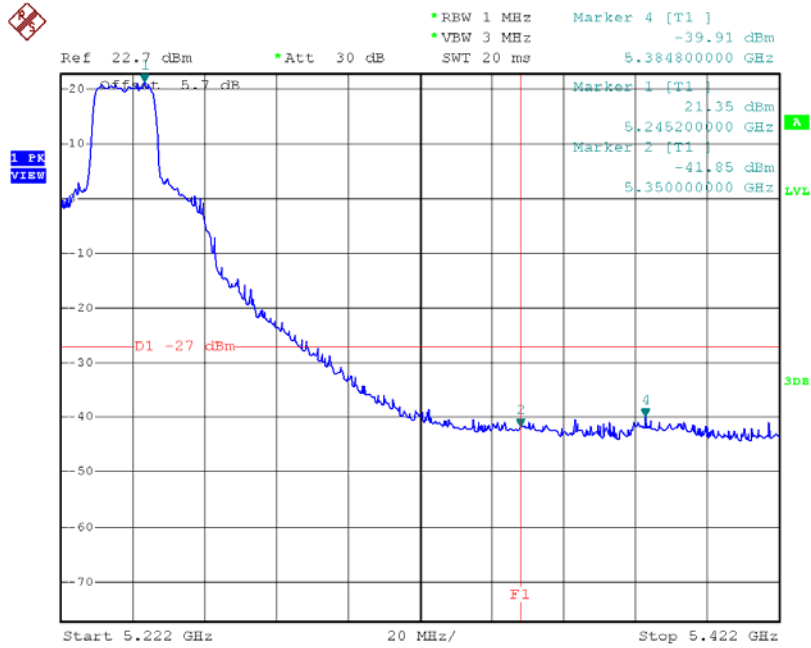

Date: 25.MAR.2016 14:59:31


Test Mode: UNII-1/TX N20 Mode_ANT 2

TX mode CH36

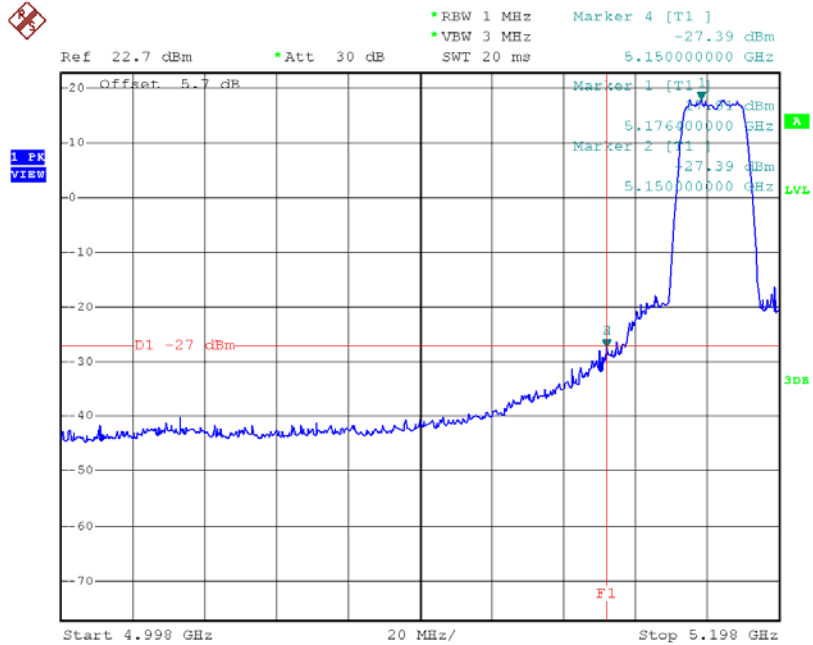

Date: 6.APR.2016 19:24:43


TX mode CH48

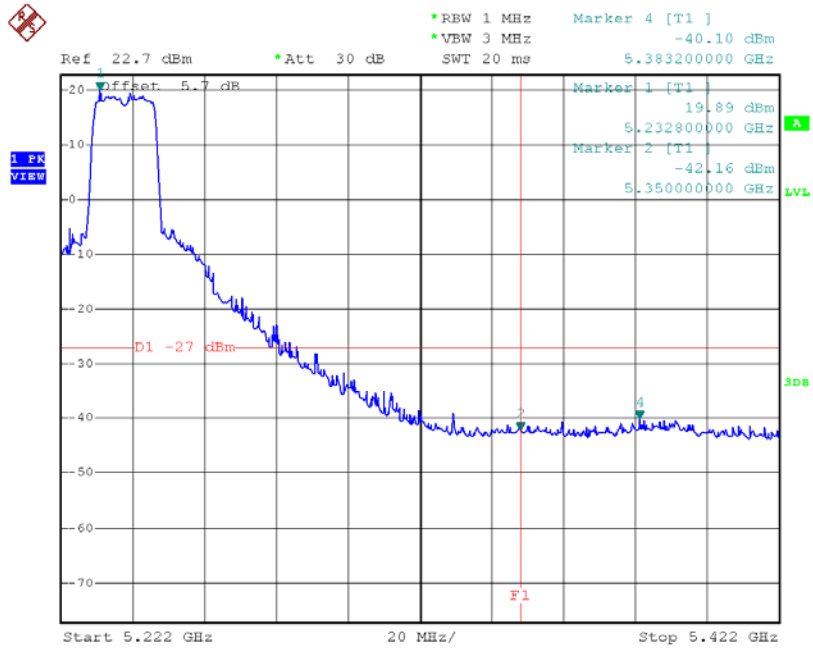

Date: 6.APR.2016 19:29:10


Test Mode: UNII-1/TX N40 Mode_ANT 1

TX mode CH38

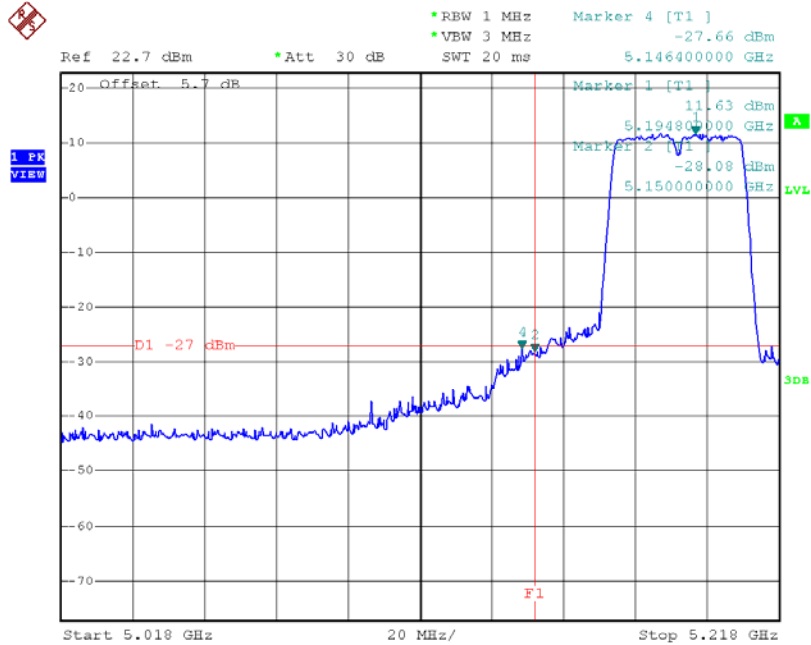

Date: 25.MAR.2016 15:12:30


TX mode CH46

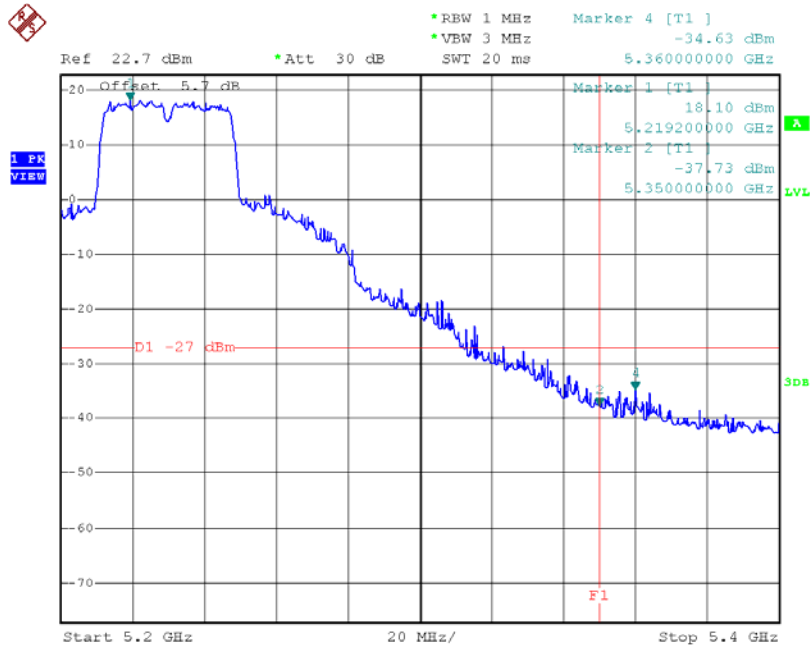

Date: 25.MAR.2016 15:13:02


Test Mode: UNII-1/TX N40 Mode_ANT 2

TX mode CH38

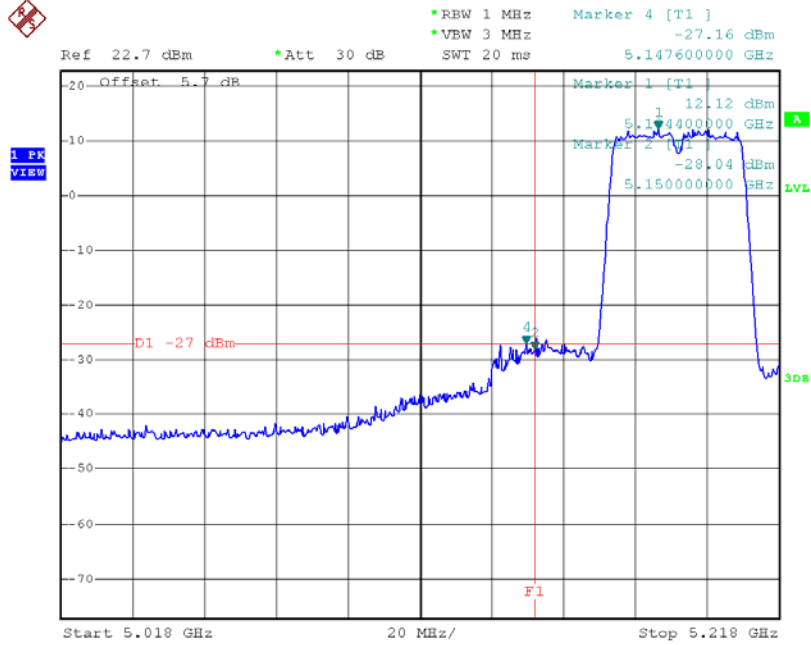

Date: 6.APR.2016 20:37:09


TX mode CH46

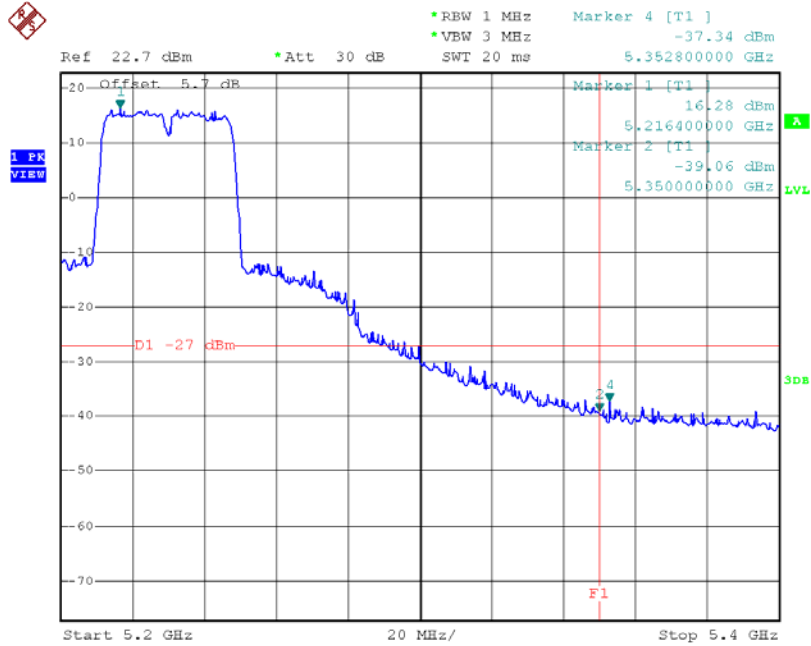

Date: 6.APR.2016 20:38:31


Test Mode: UNII-2A/TX A Mode_ANT 1

TX mode CH52

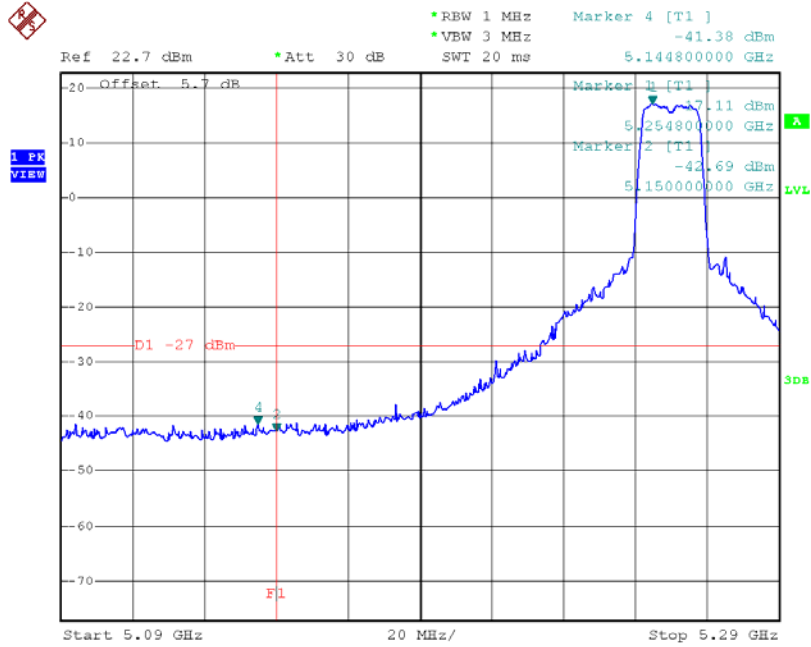

Date: 25.MAR.2016 14:55:05


TX mode CH64

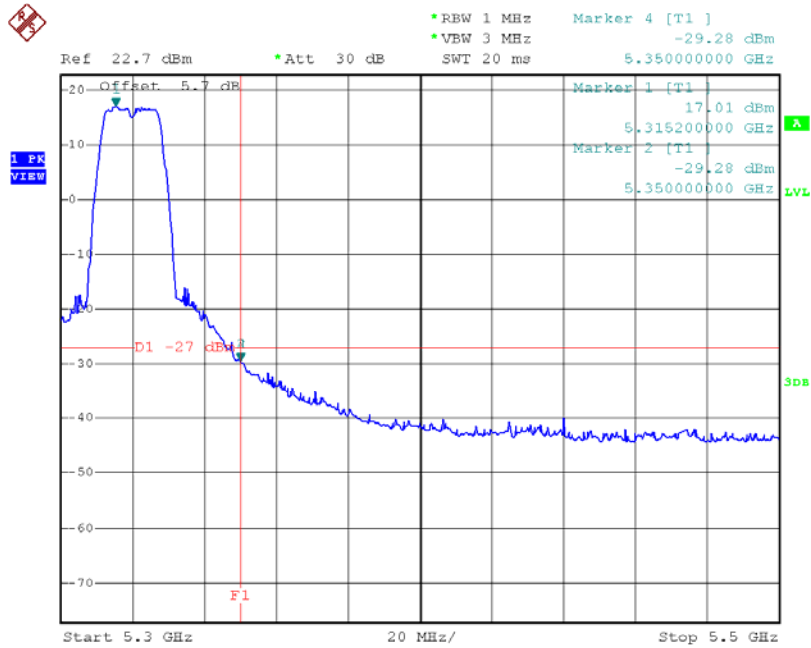

Date: 25.MAR.2016 14:55:58


Test Mode: UNII-2A/TX A Mode_ANT 2

TX mode CH52

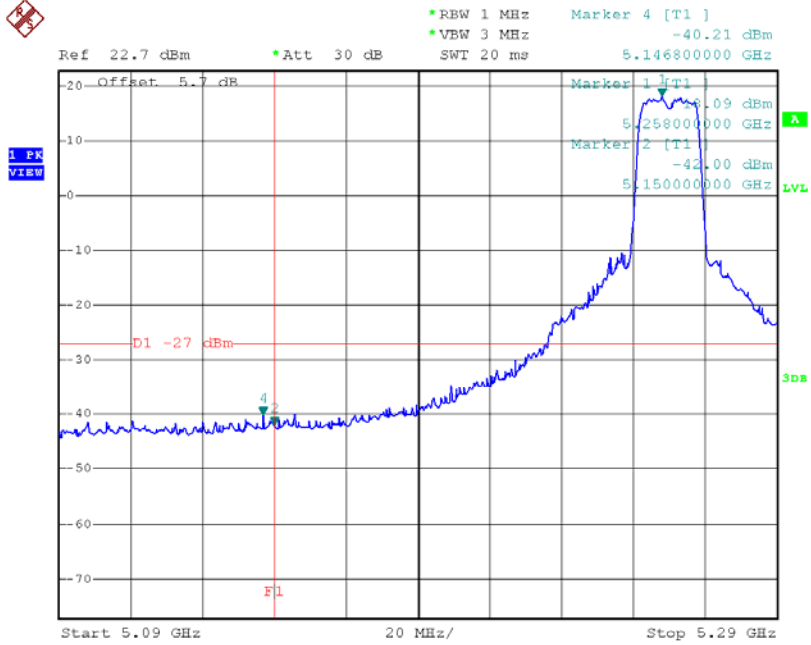

Date: 6.APR.2016 18:18:04


TX mode CH64

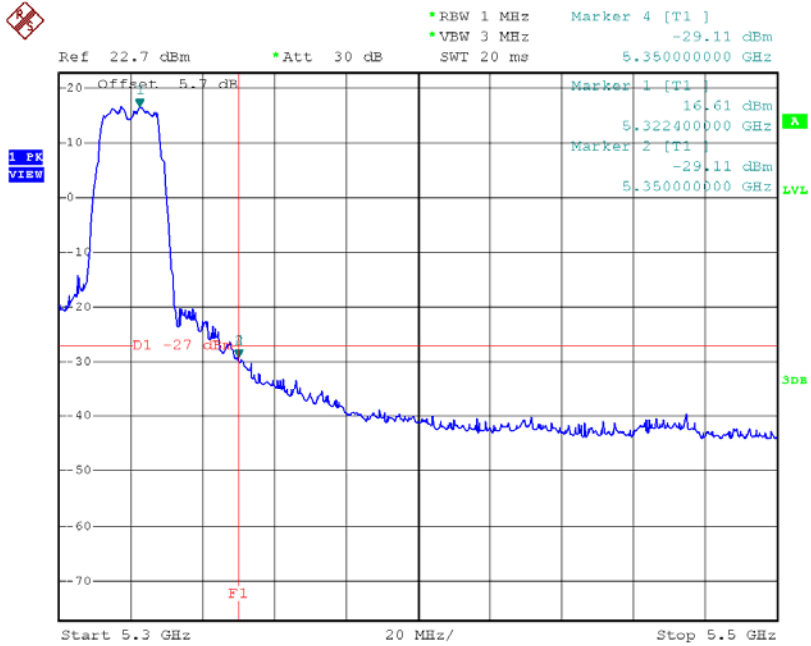

Date: 6.APR.2016 18:20:21


Test Mode: UNII-2A/TX N20 Mode_ANT 1

TX mode CH52

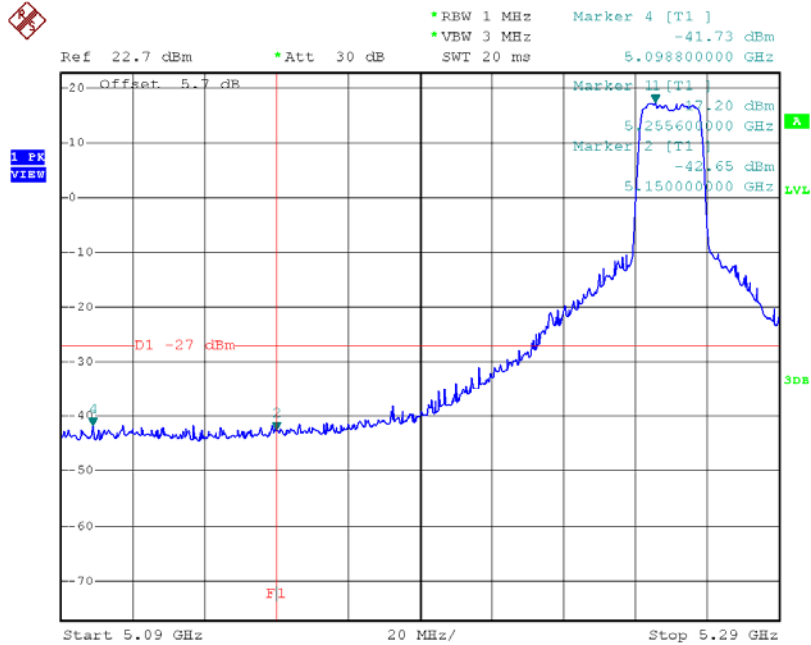

Date: 25.MAR.2016 15:00:06


TX mode CH64

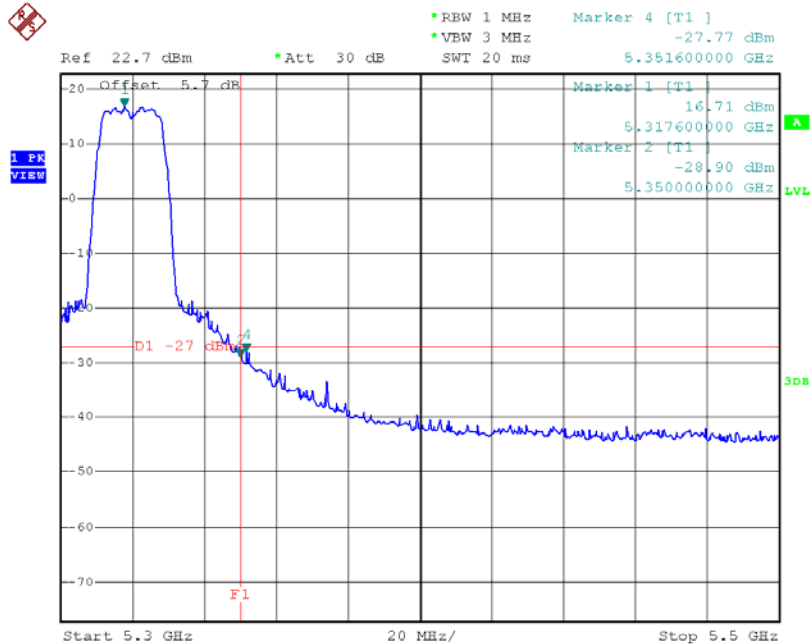

Date: 25.MAR.2016 15:01:54


Test Mode: UNII-2A/TX N20 Mode_ANT 2

TX mode CH52

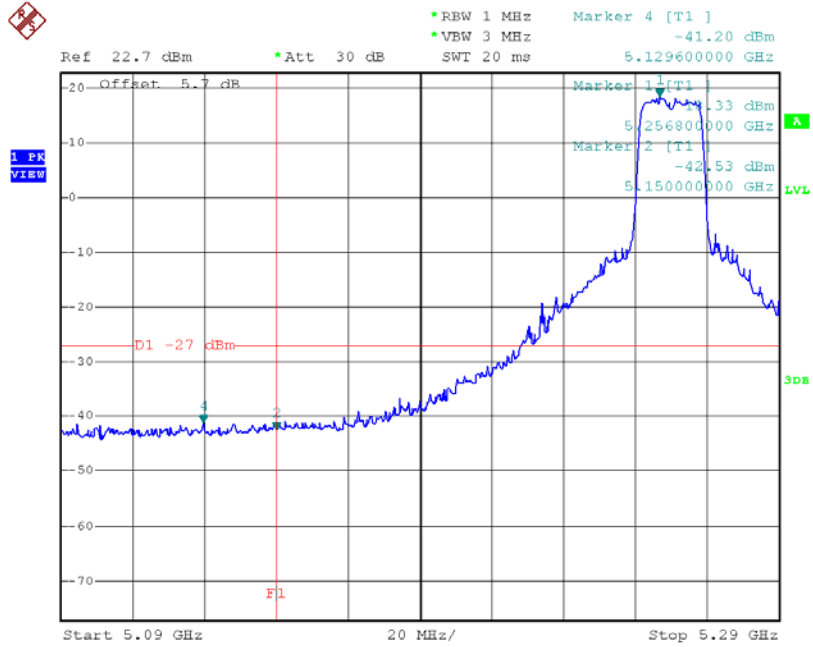

Date: 6.APR.2016 19:30:30


TX mode CH64

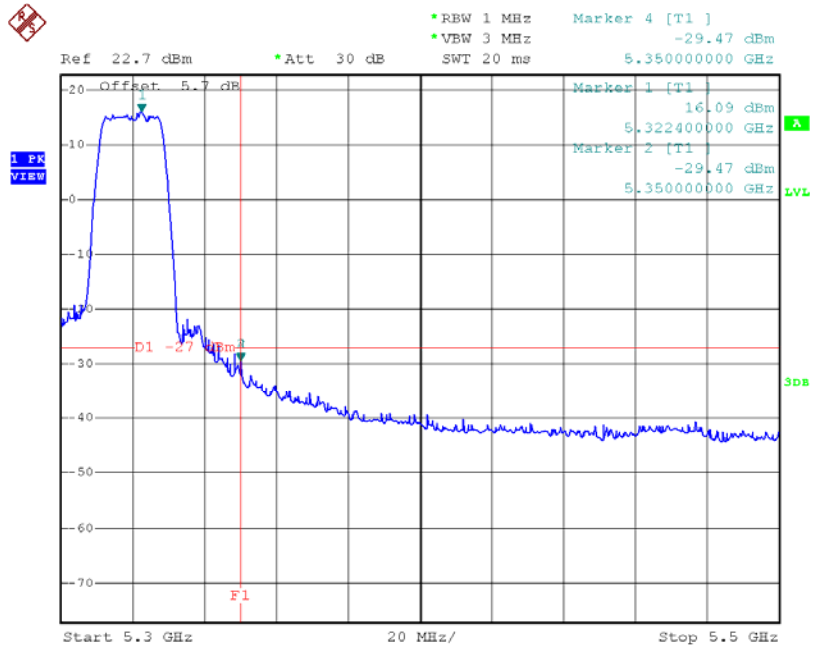

Date: 6.APR.2016 19:40:21


Test Mode: UNII-2A/TX N40 Mode_ANT 1

TX mode CH54

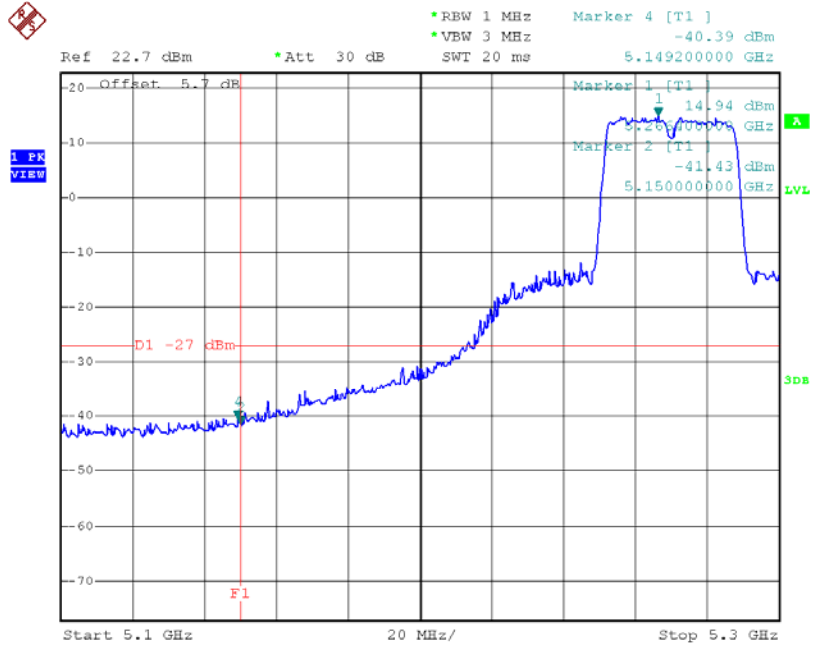

Date: 25.MAR.2016 15:16:50


TX mode CH62

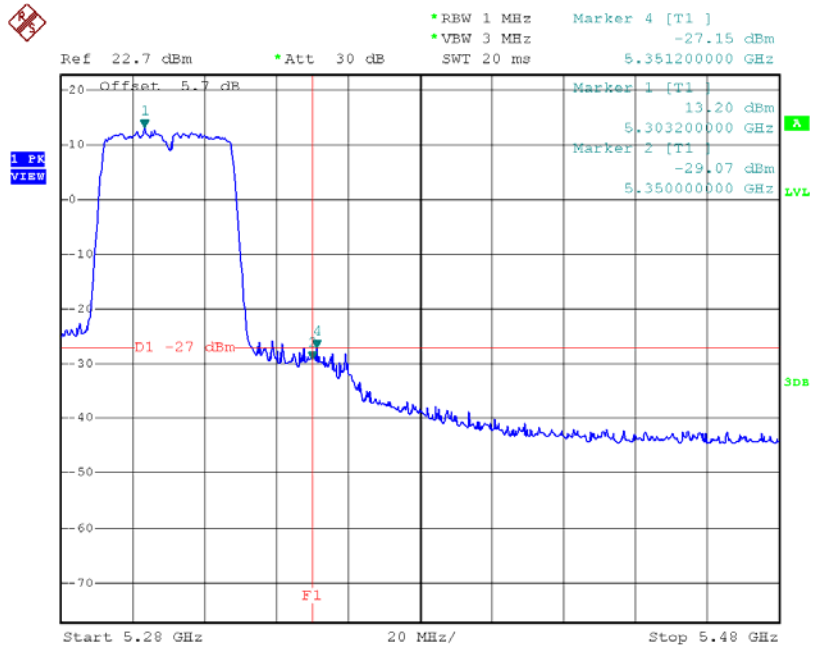

Date: 25.MAR.2016 15:18:52


Test Mode: UNII-2A/TX N40 Mode_ANT 2

TX mode CH54

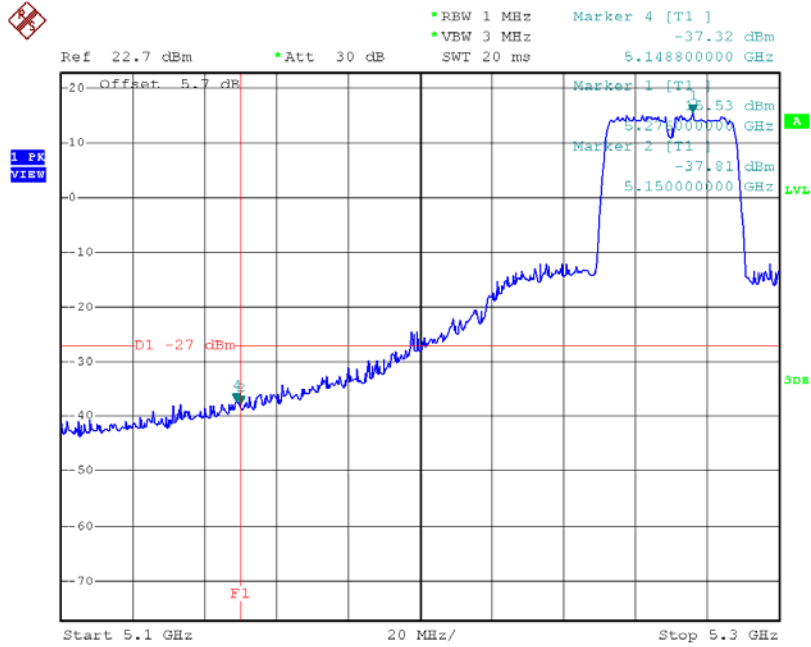

Date: 6.APR.2016 20:39:46


TX mode CH62

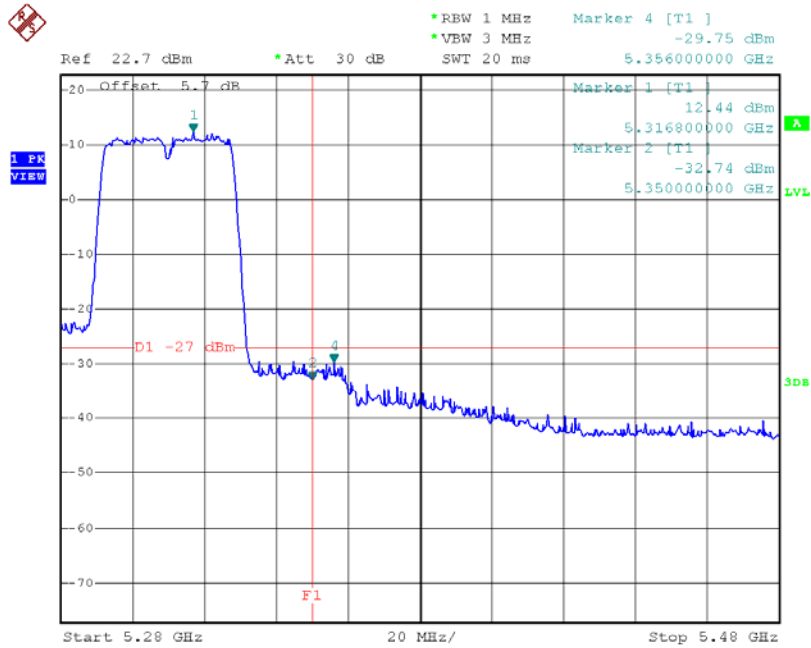

Date: 6.APR.2016 20:41:03


Test Mode: UNII-2C/TX A Mode_ANT 1

TX mode CH100

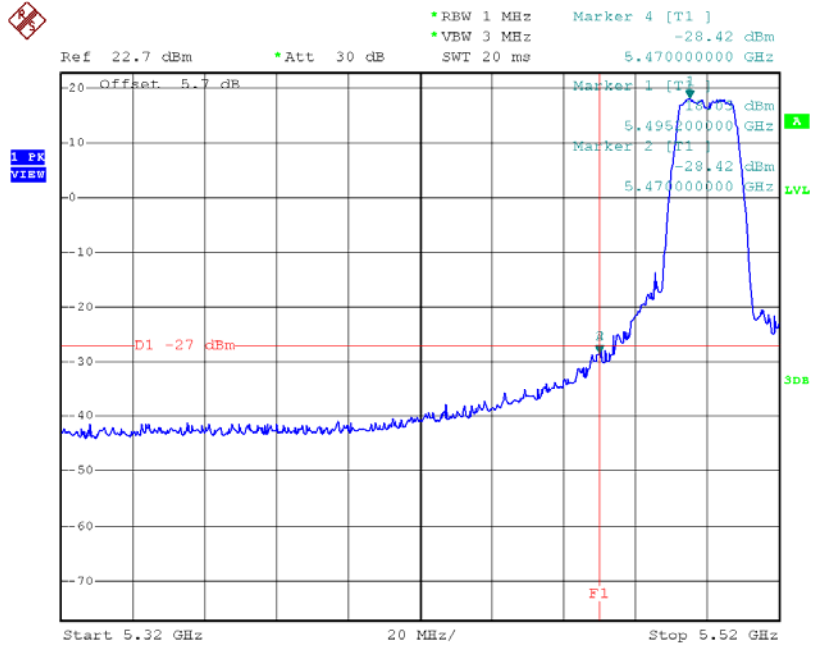

Date: 25.MAR.2016 14:56:23


TX mode CH140

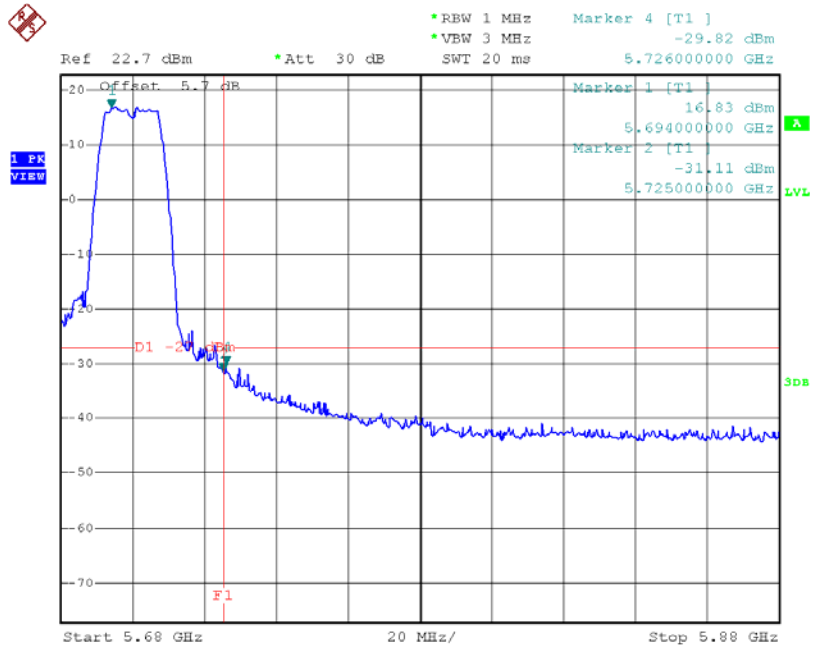

Date: 25.MAR.2016 14:57:12


Test Mode: UNII-2C/TX A Mode_ANT 2

TX mode CH100

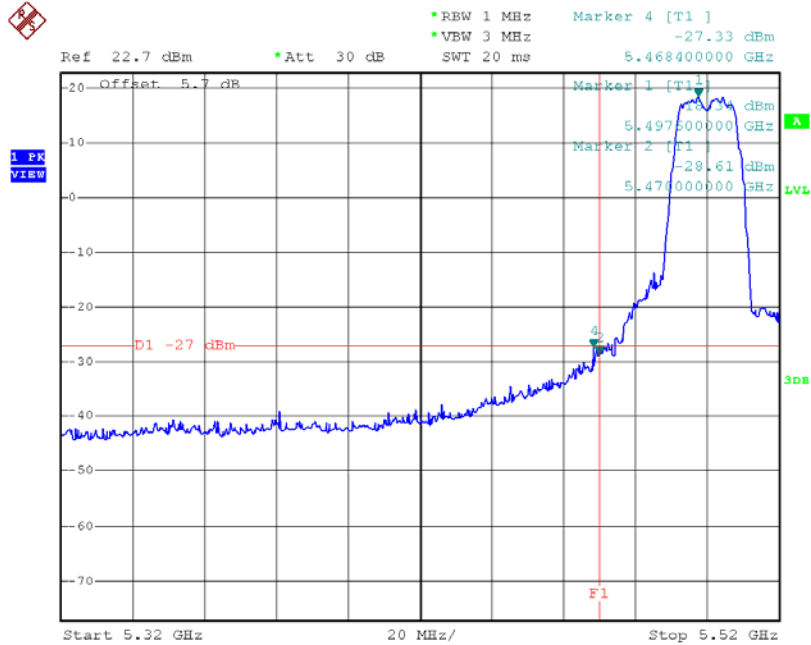

Date: 6.APR.2016 18:21:21


TX mode CH140

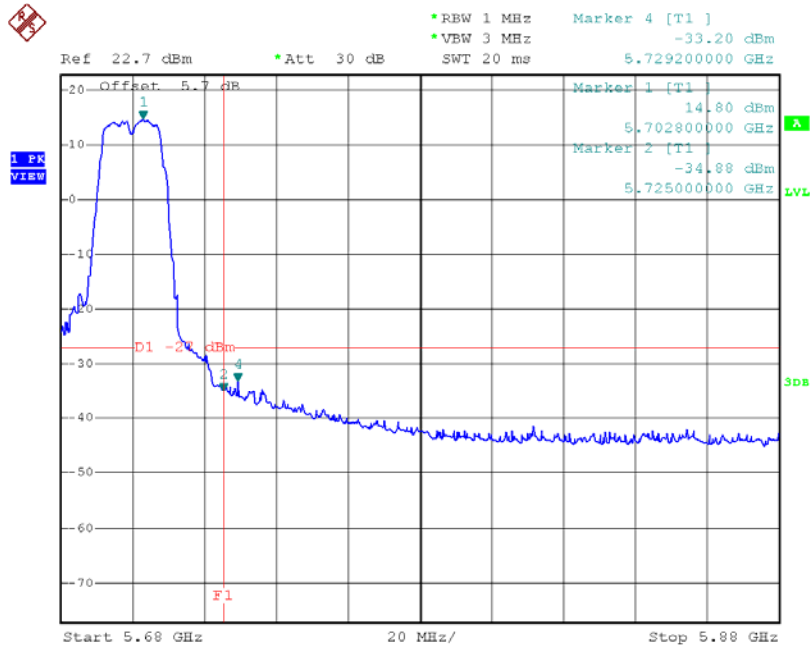

Date: 6.APR.2016 18:24:31


Test Mode: UNII-2C/TX N20 Mode_ANT 1

TX mode CH100

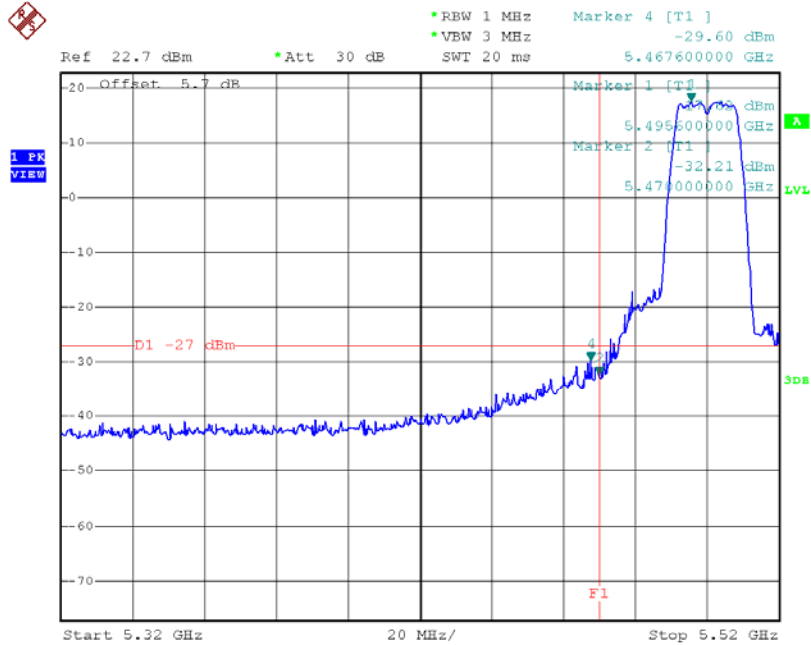

Date: 25.MAR.2016 15:02:28


TX mode CH140

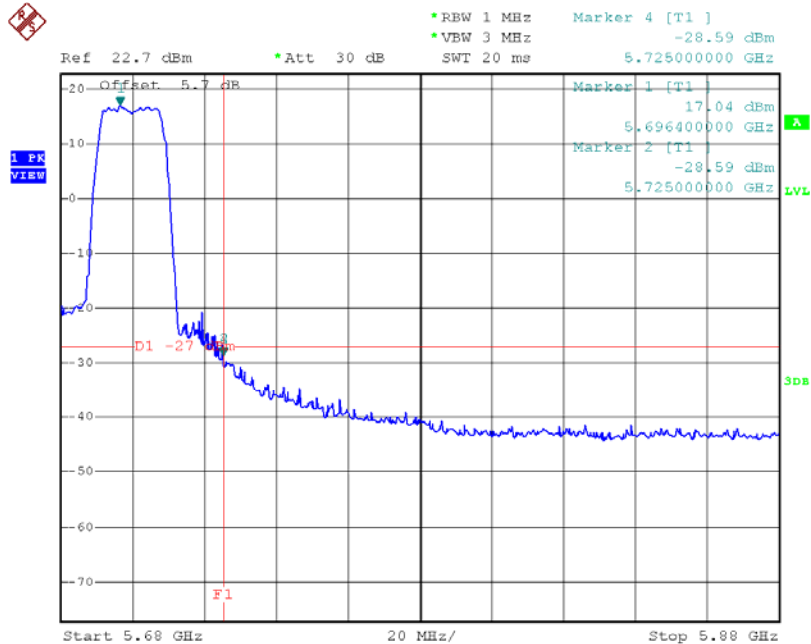

Date: 25.MAR.2016 15:03:35


Test Mode: UNII-2C/TX N20 Mode_ANT 2

TX mode CH100

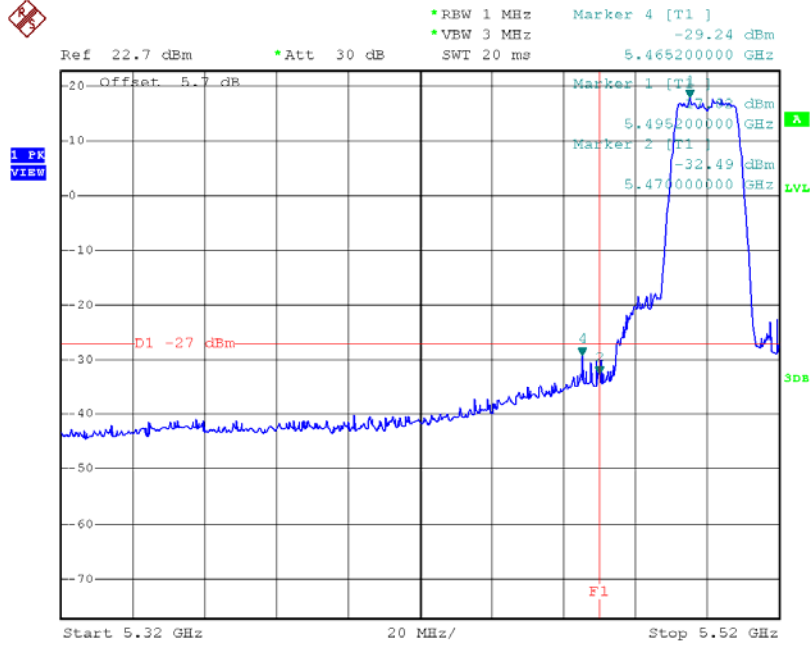

Date: 6.APR.2016 19:42:44


TX mode CH140

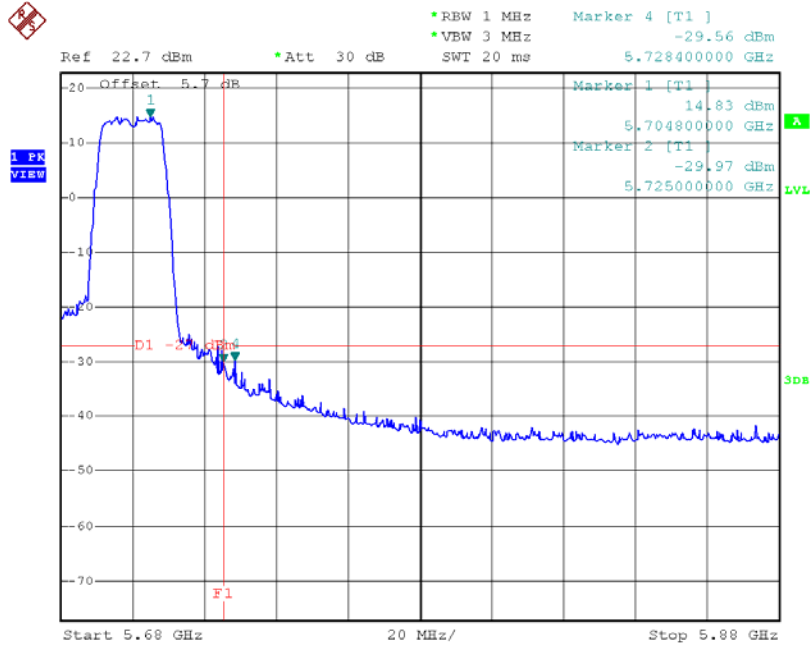

Date: 6.APR.2016 19:46:32


Test Mode: UNII-2C/TX N40 Mode_ANT 1

TX mode CH102

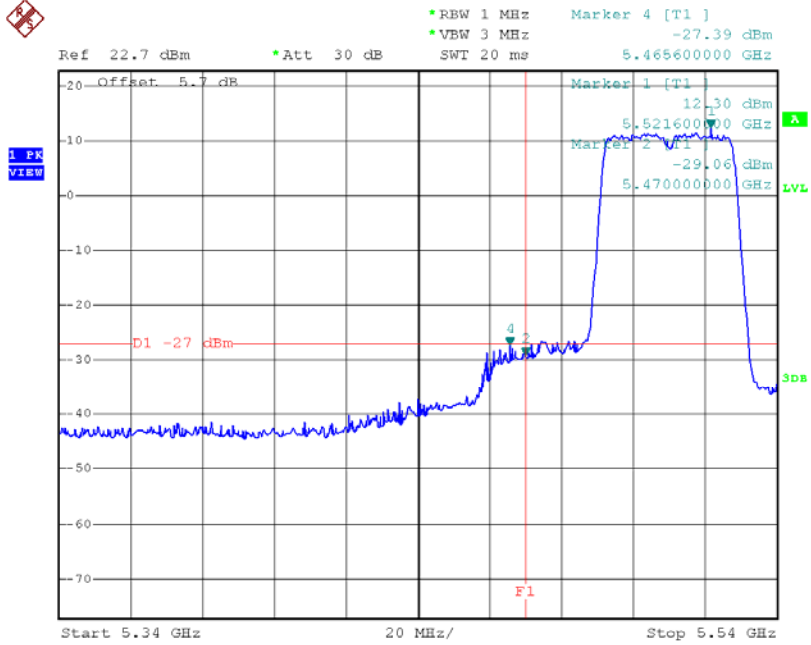

Date: 25.MAR.2016 15:41:22


TX mode CH134

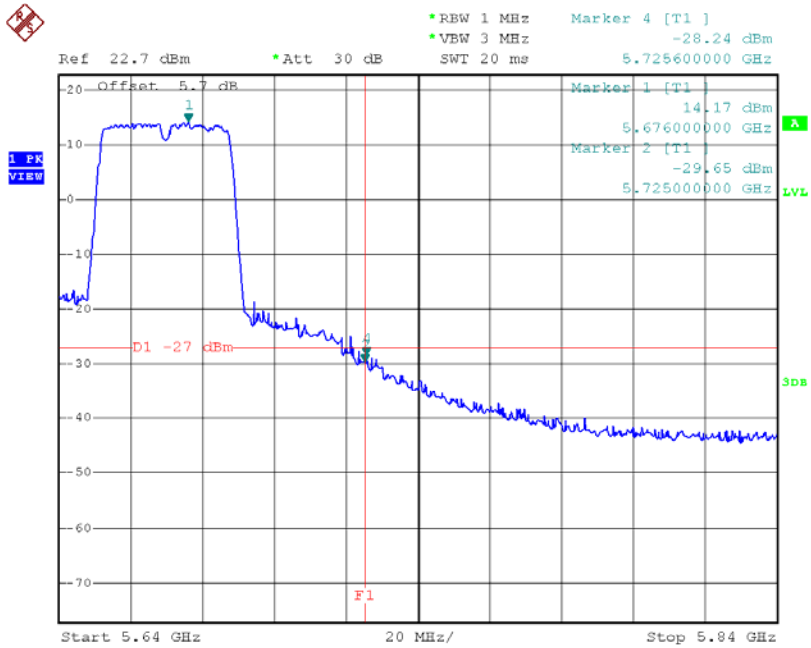

Date: 25.MAR.2016 15:43:12


Test Mode: UNII-2C/TX N40 Mode_ANT 2

TX mode CH102

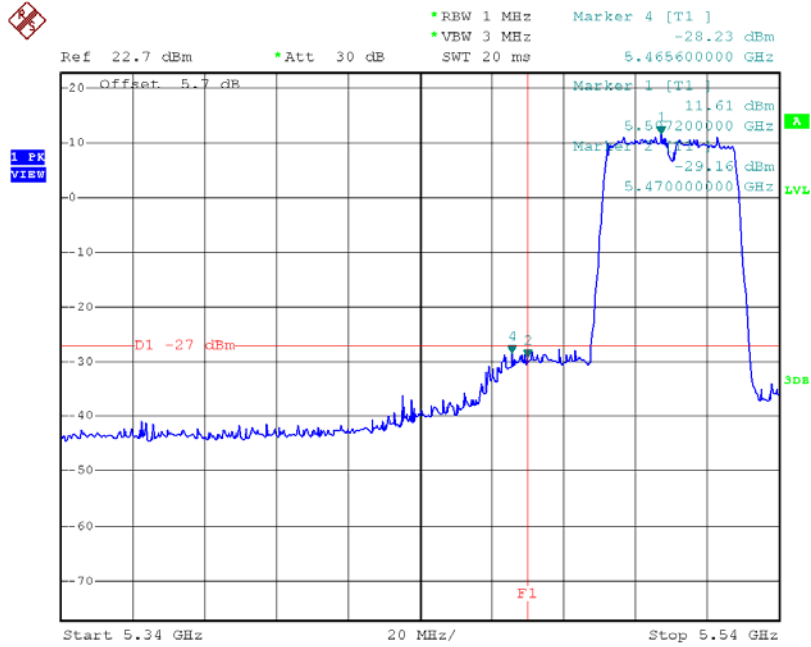

Date: 6.APR.2016 20:43:40


TX mode CH134

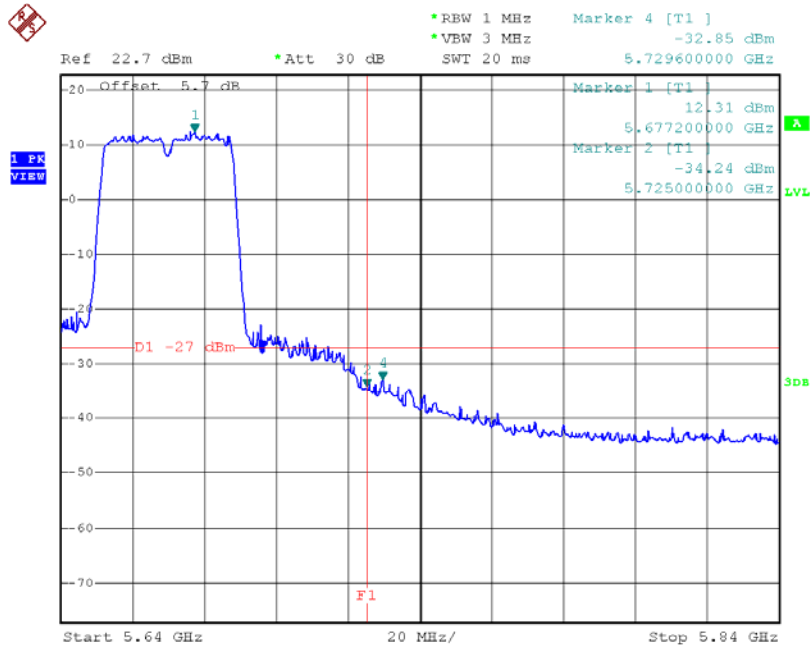

Date: 6.APR.2016 20:47:35


Test Mode: UNII-3/TX A Mode_ANT 1

TX A Mode CH149

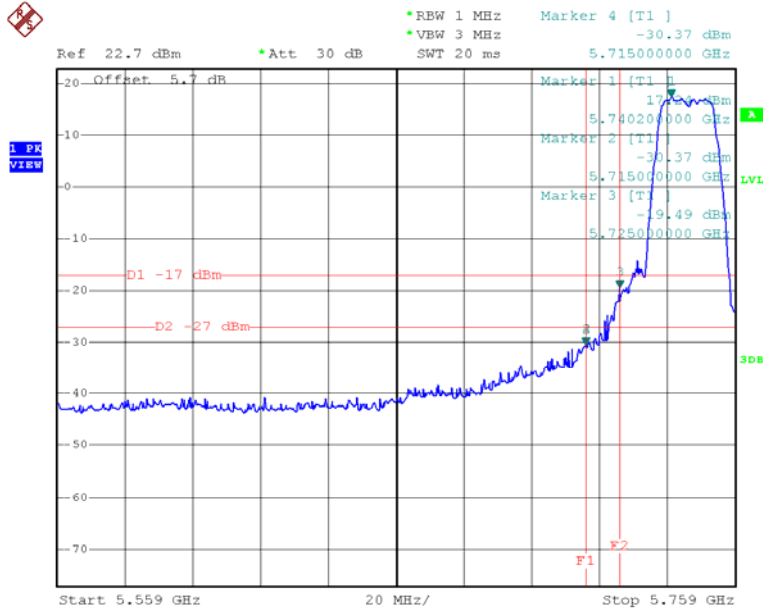

Date: 25.MAR.2016 14:57:40


TX A Mode CH165

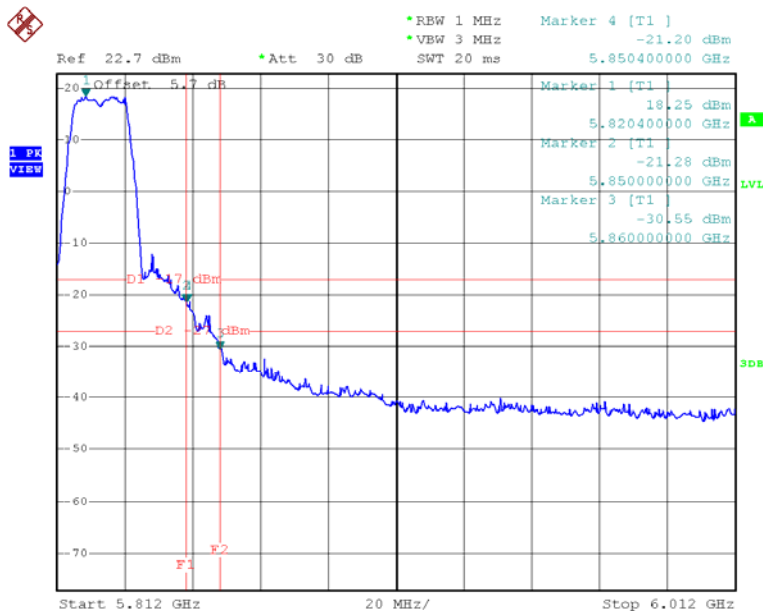

Date: 25.MAR.2016 14:58:17


Test Mode: UNII-3/TX A Mode_ANT 2

TX A Mode CH149

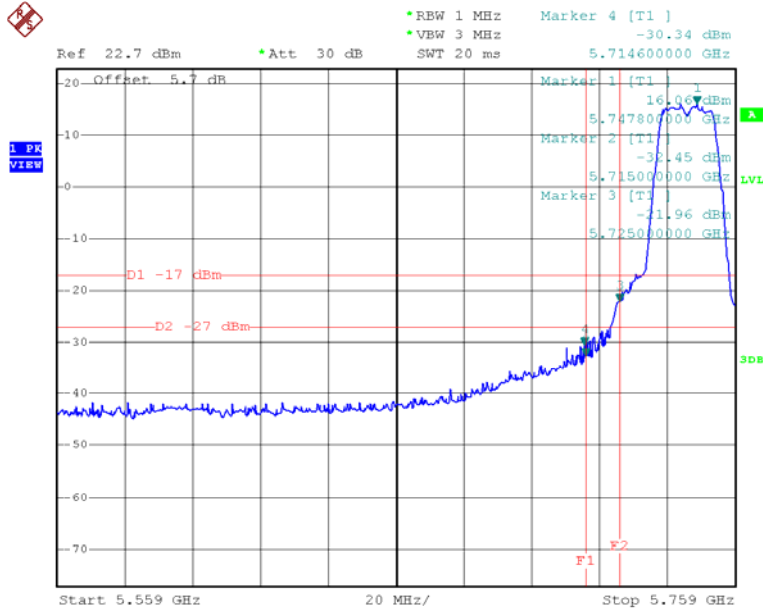

Date: 6.APR.2016 18:25:40


TX A Mode CH165

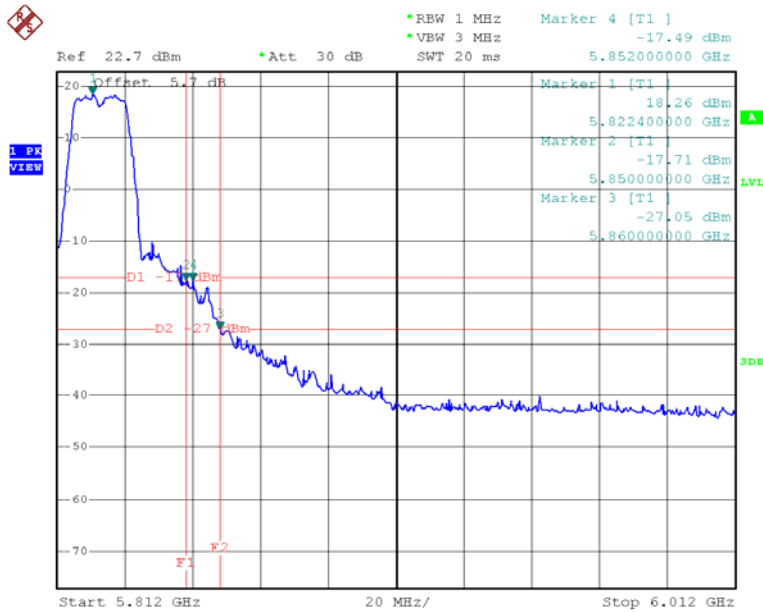

Date: 6.APR.2016 19:19:56


Test Mode: UNII-3/TX N20 Mode_ANT 1

TX HT20 mode CH149

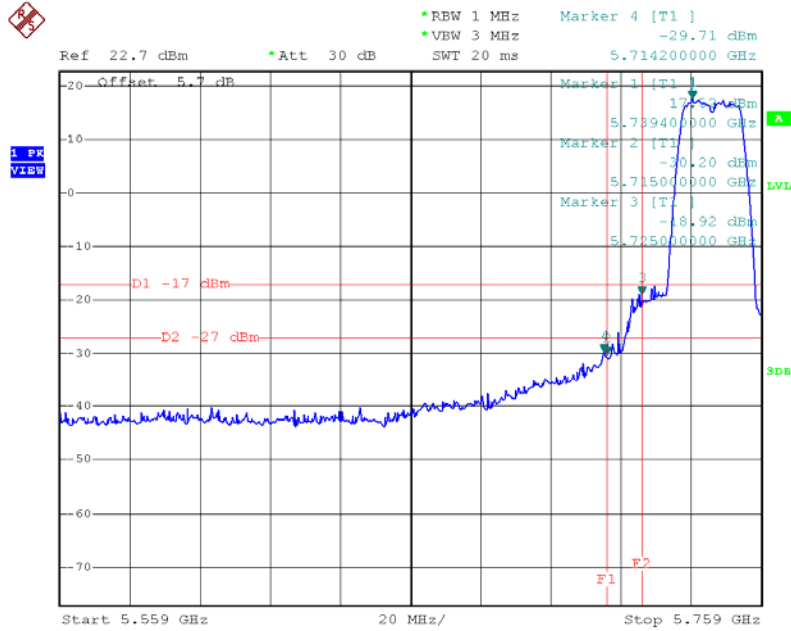

Date: 25.MAR.2016 15:04:56


TX HT20 mode CH165

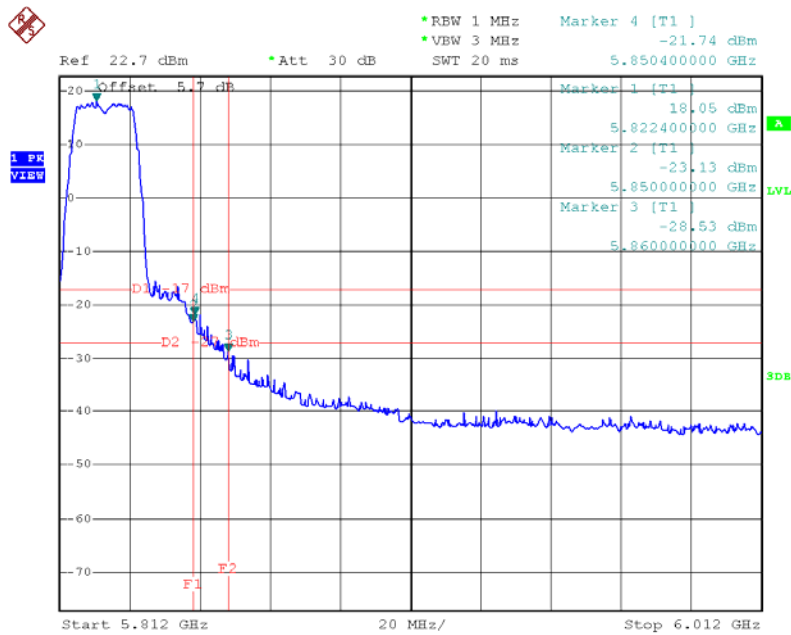

Date: 25.MAR.2016 15:05:28


Test Mode: UNII-3/TX N20 Mode_ANT 2

TX HT20 mode CH149

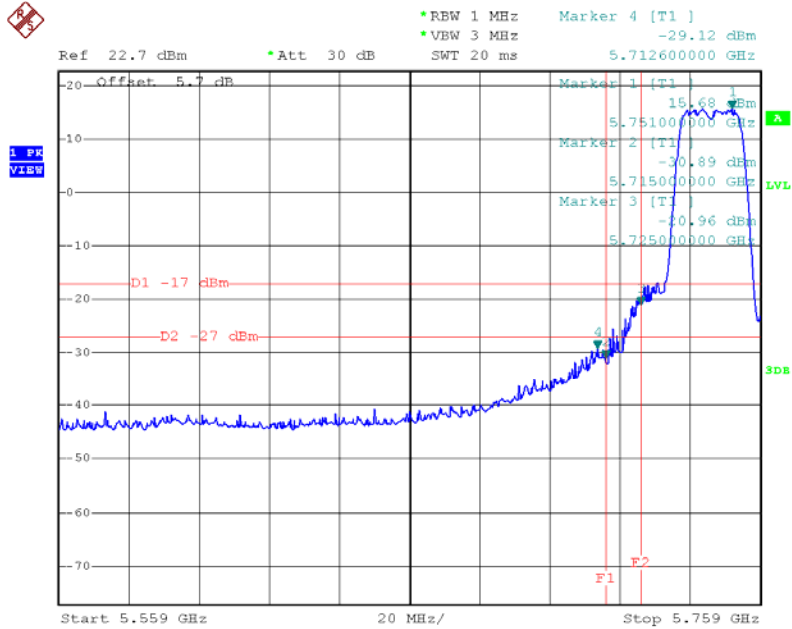

Date: 6.APR.2016 19:49:03


X HT20 mode CH165

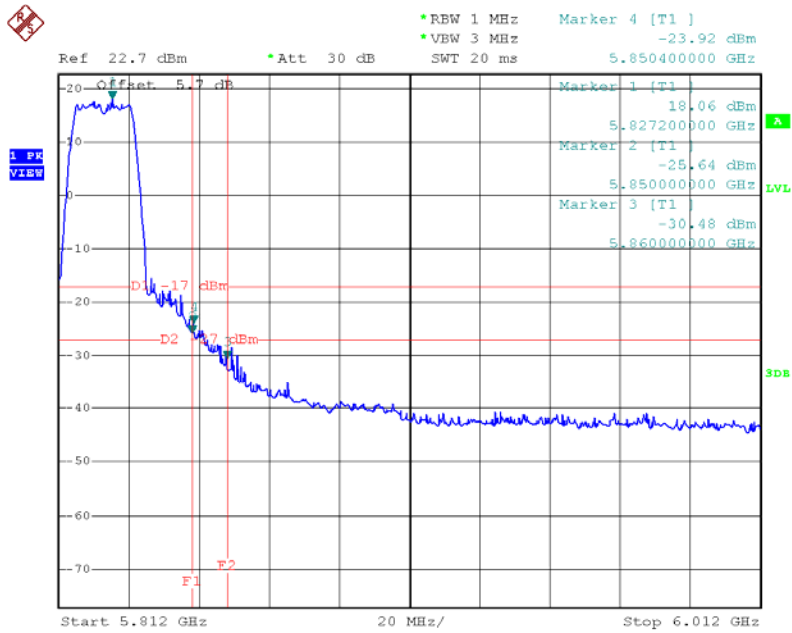

Date: 6.APR.2016 19:54:15


Test Mode: UNII-3/TX N40 Mode_ANT 1

UNII-3/TX HT40 mode CH151

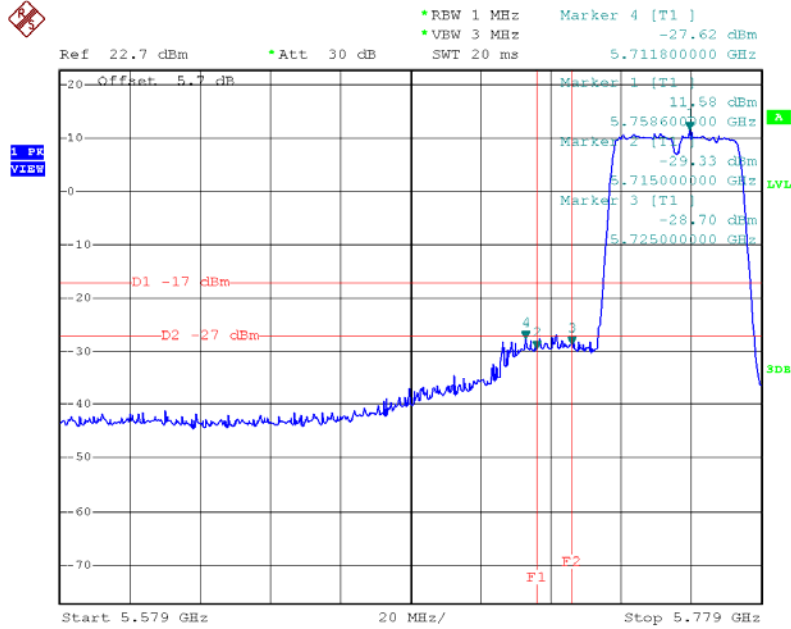

Date: 25.MAR.2016 15:46:44


UNII-3/TX HT40 mode CH159

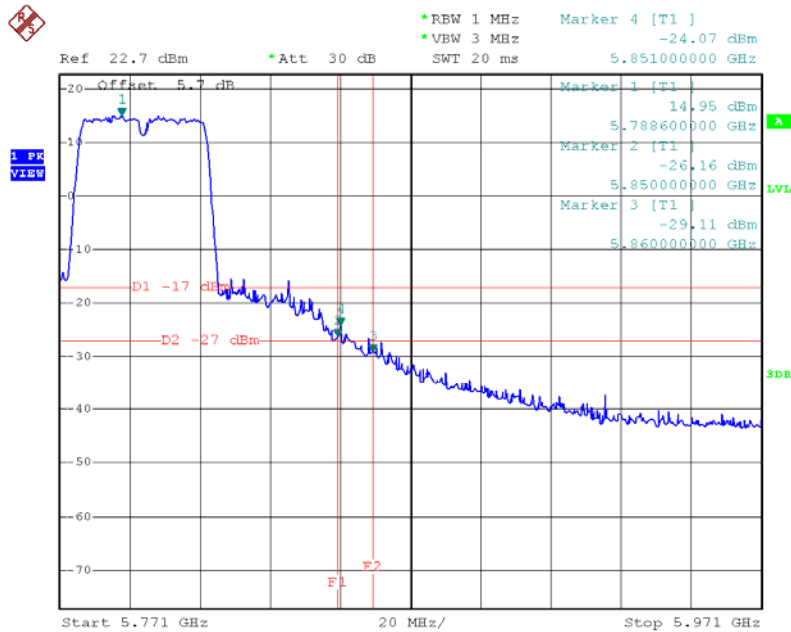

Date: 25.MAR.2016 15:50:03


Test Mode: UNII-3/TX N40 Mode_ANT 2

TX HT40 mode CH151

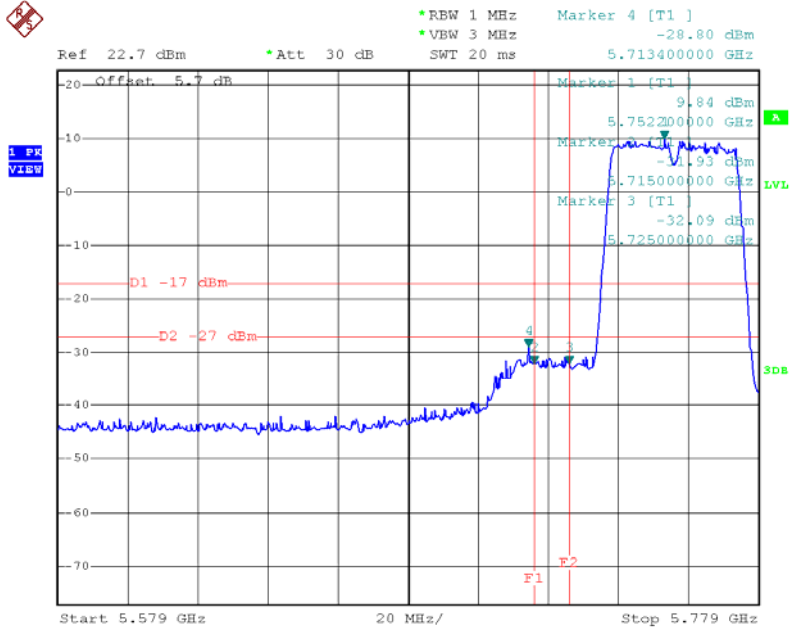

Date: 6.APR.2016 20:48:42


HT40 mode CH159

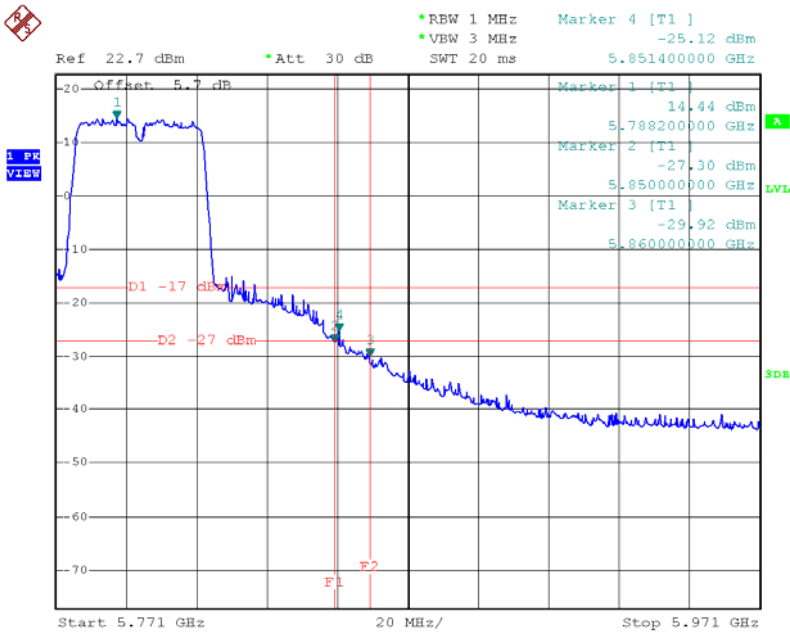

Date: 6.APR.2016 20:49:50


Test Mode: UNII-1/TX AC20 Mode_ANT 1

TX mode CH36

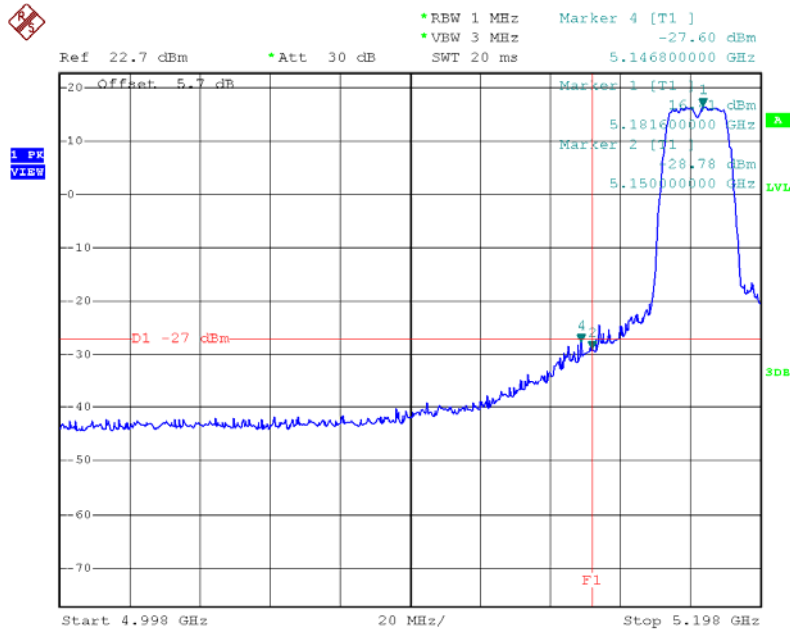

Date: 25.MAR.2016 15:06:16


TX mode CH48

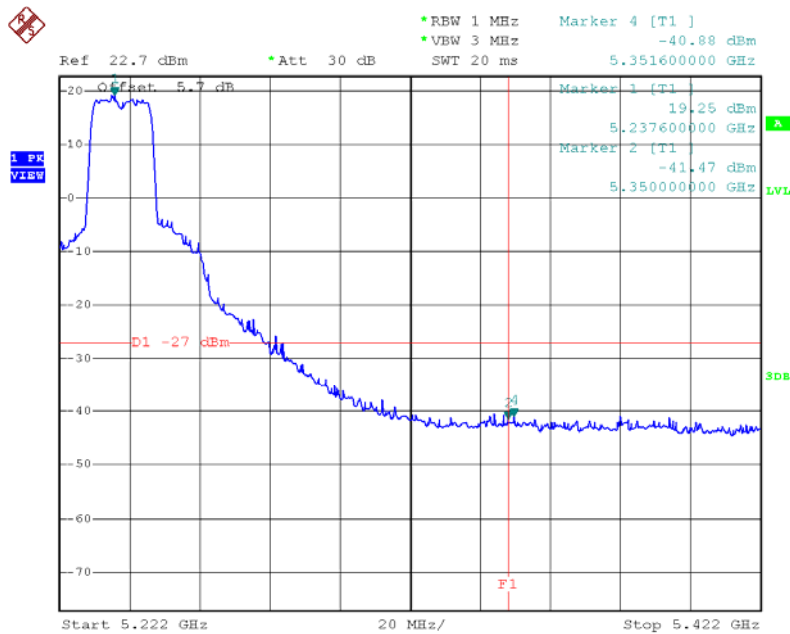

Date: 25.MAR.2016 15:06:45


Test Mode: UNII-1/TX AC20 Mode_ANT 2

TX mode CH36

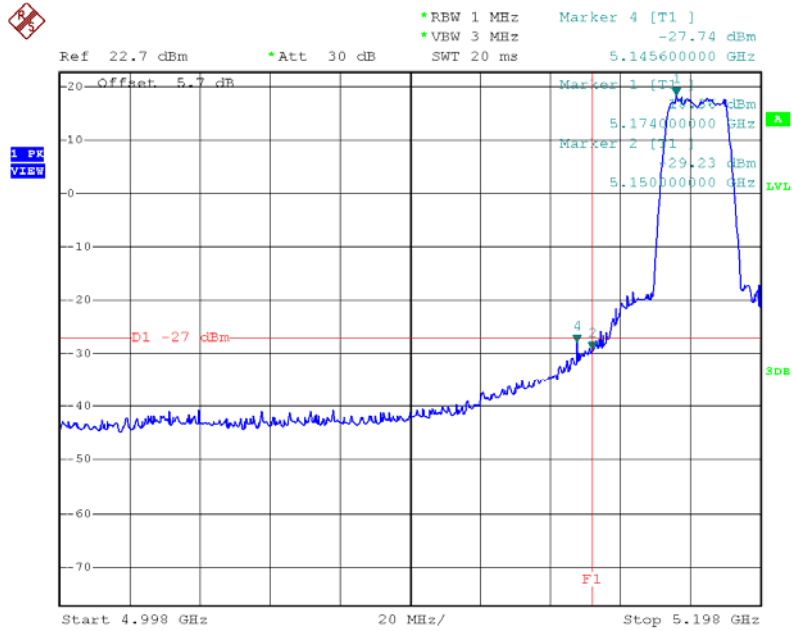

Date: 6.APR.2016 19:56:57


TX mode CH48

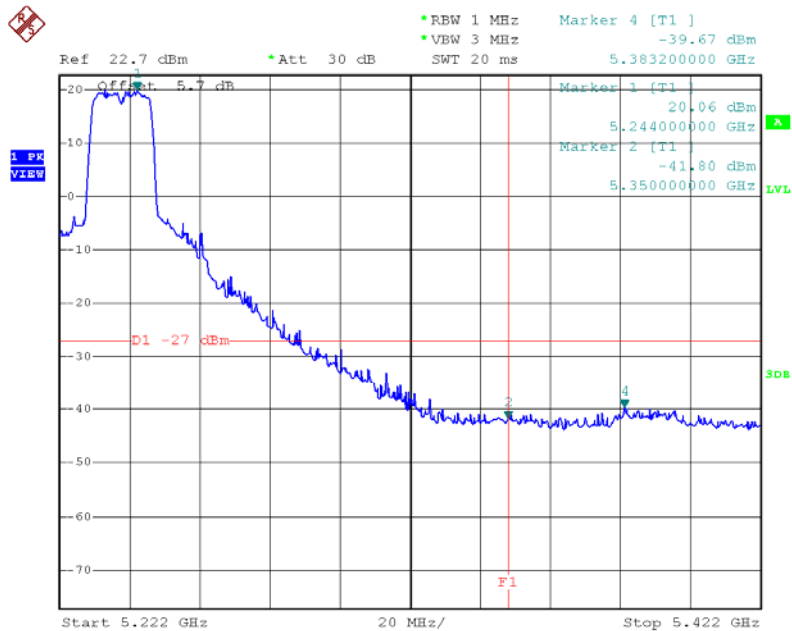

Date: 6.APR.2016 20:13:17


Test Mode: UNII-1/TX AC40 Mode_ANT 1

TX mode CH38

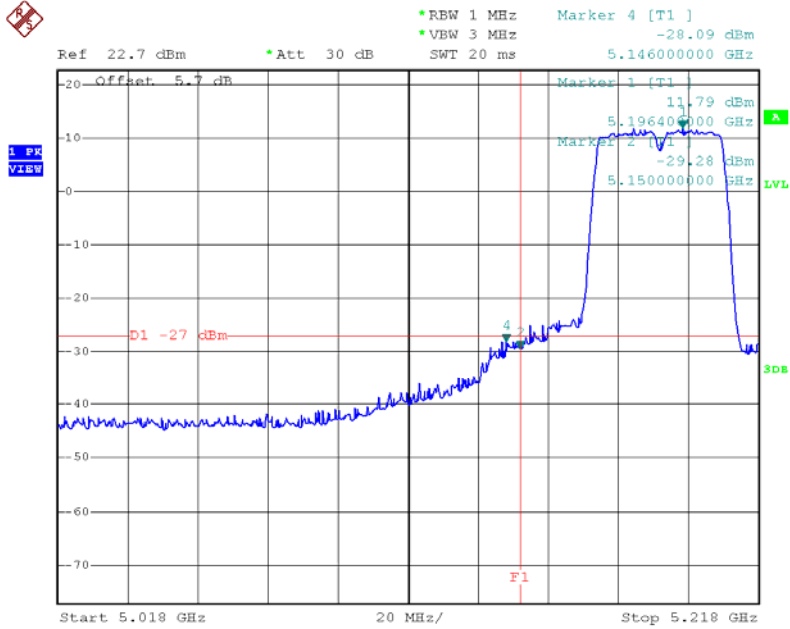

Date: 25.MAR.2016 15:56:59


TX mode CH46

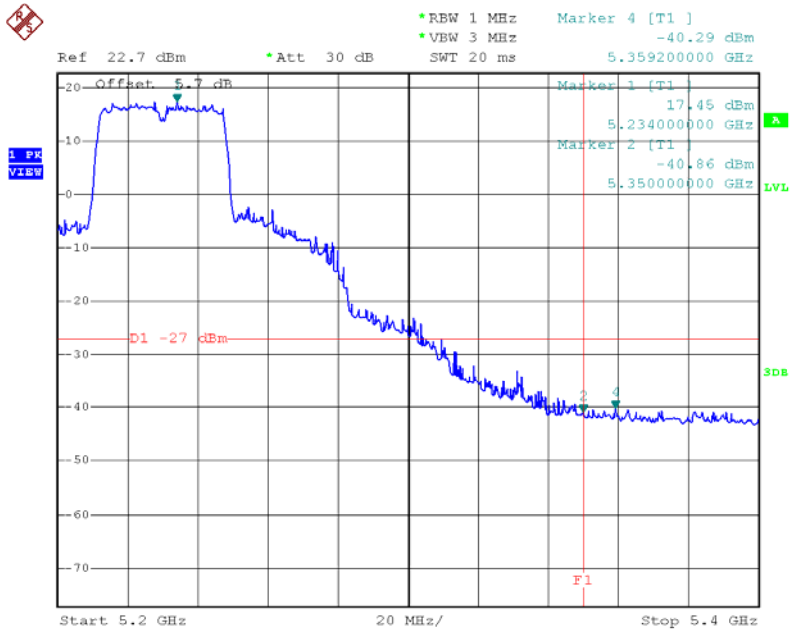

Date: 25.MAR.2016 16:00:09


Test Mode: UNII-1/TX AC40 Mode_ANT 2

TX mode CH38

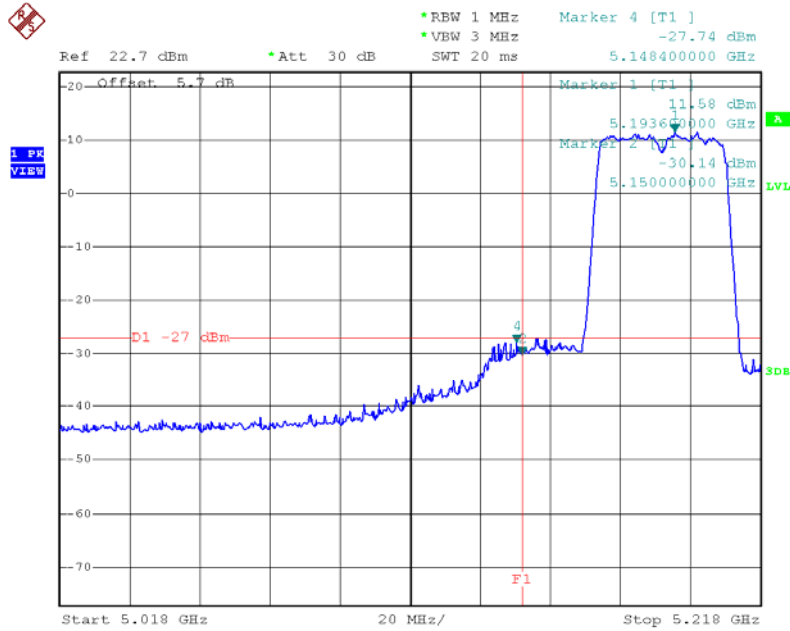

Date: 6.APR.2016 20:52:02


TX mode CH46

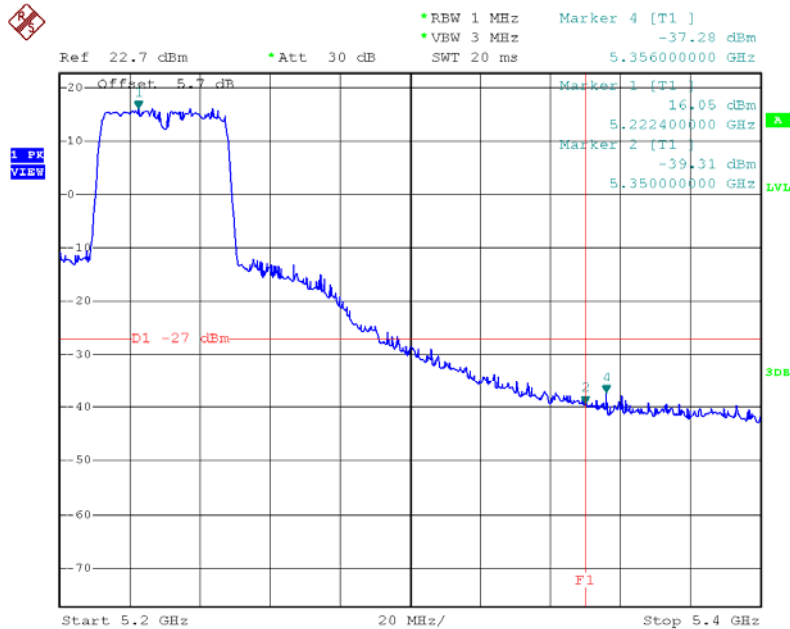


Date: 6.APR.2016 20:53:25

Test Mode: UNII-1/TX AC80 Mode_ANT 1

TX mode CH42

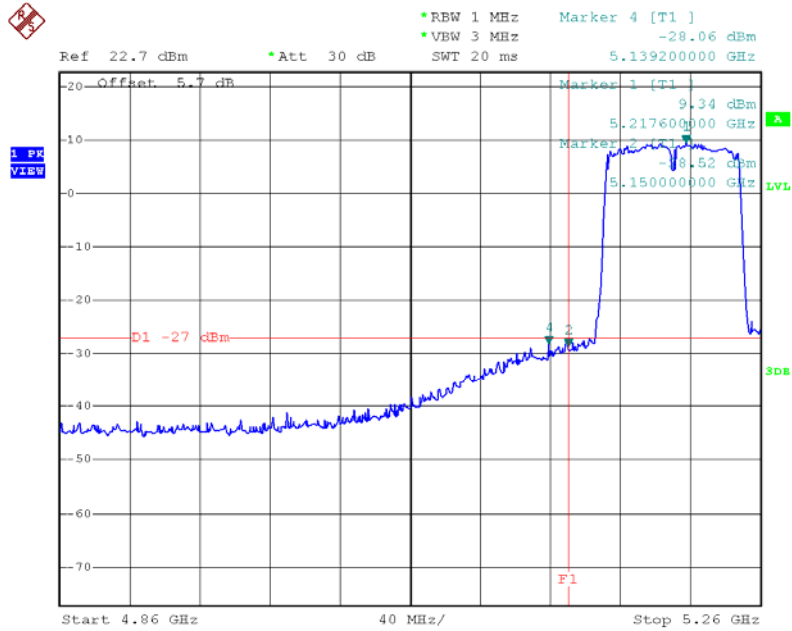


Date: 30.MAR.2016 17:01:18

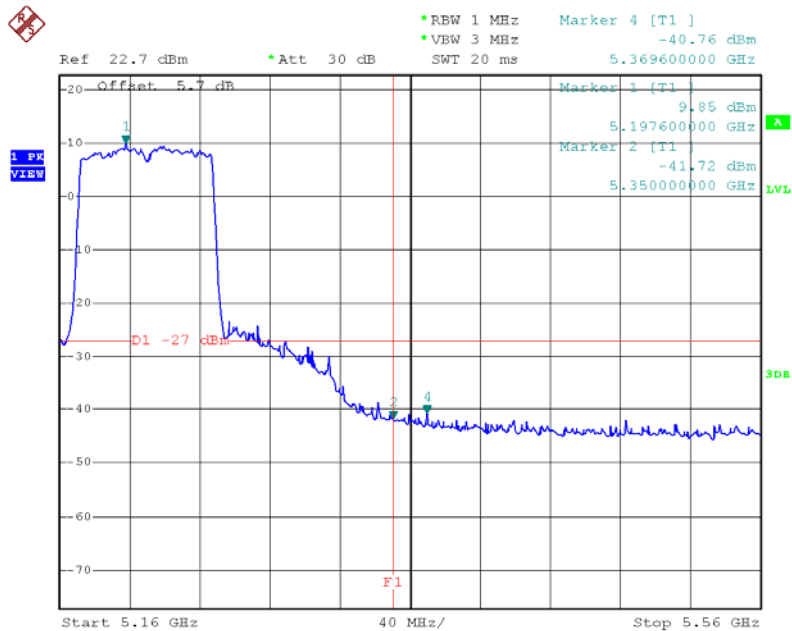


Date: 30.MAR.2016 17:01:26

Test Mode: UNII-1/TX AC80 Mode_ANT 2

TX mode CH42

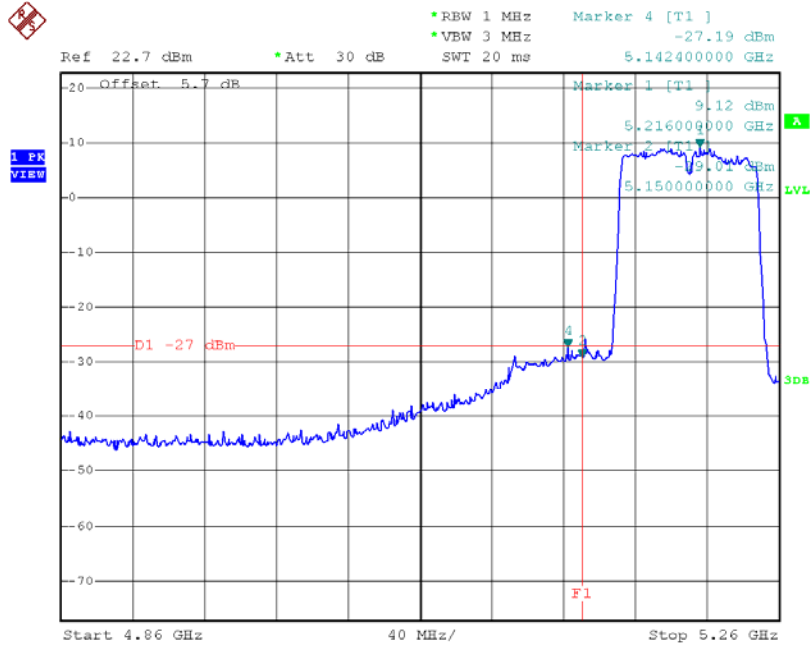


Date: 6.APR.2016 21:07:25

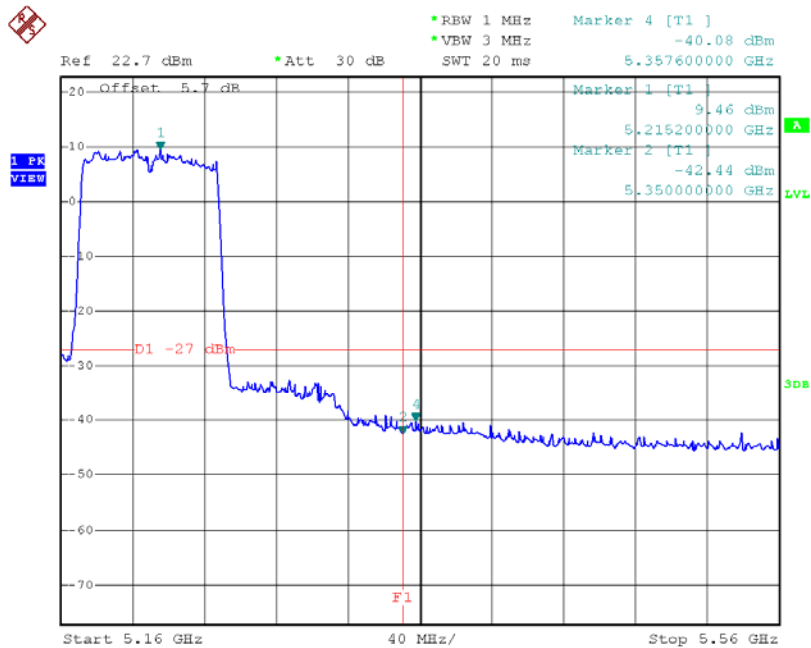

Date: 6.APR.2016 21:07:32


Test Mode: UNII-2A/TX AC20 Mode_ANT 1

TX mode CH52

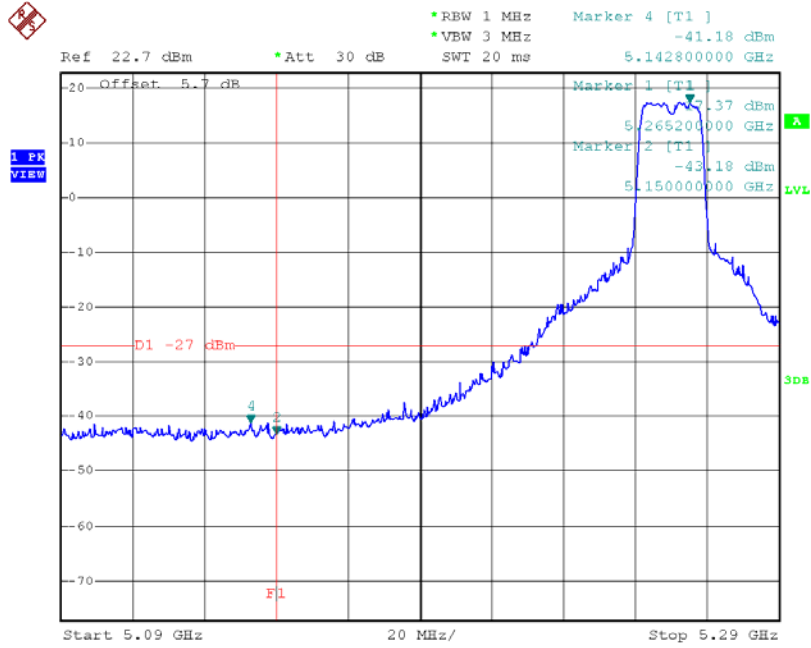

Date: 25.MAR.2016 15:07:12


TX mode CH64

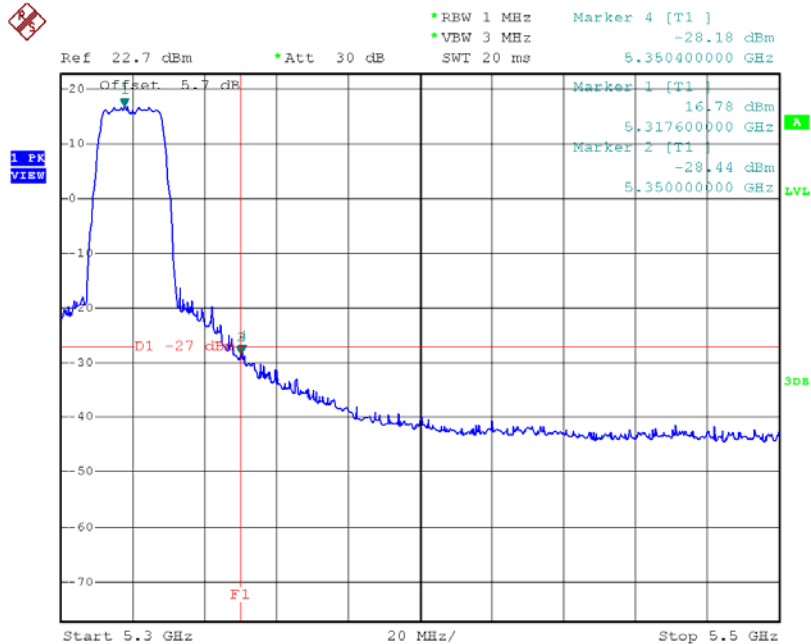

Date: 25.MAR.2016 15:07:39


Test Mode: UNII-2A/TX AC20 Mode_ANT 2

TX mode CH52

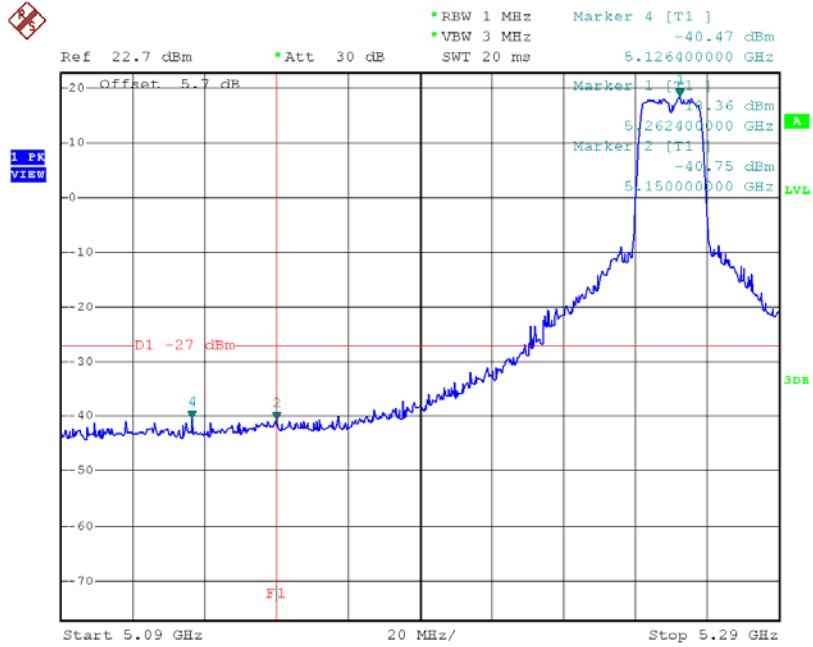

Date: 6.APR.2016 20:14:48


TX mode CH64

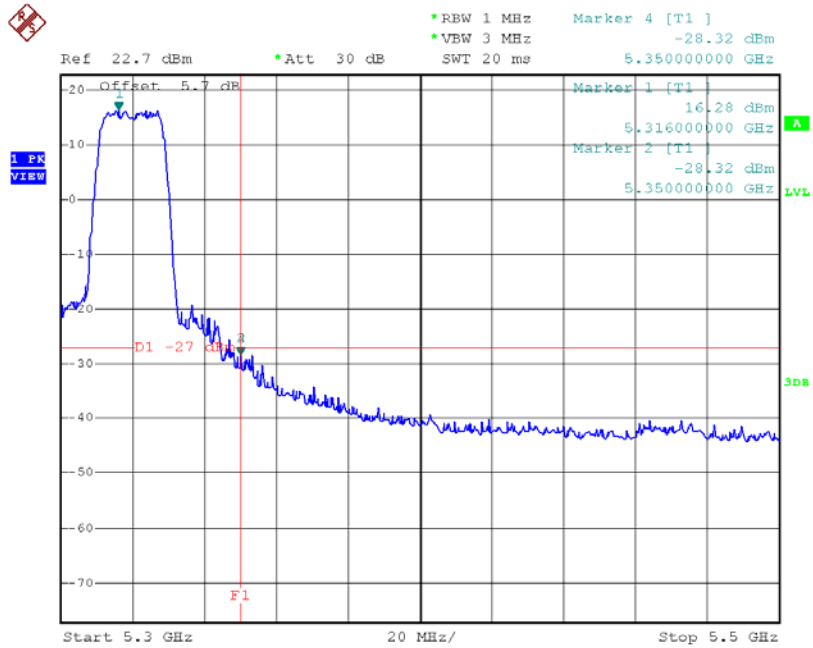

Date: 6.APR.2016 20:20:40


Test Mode: UNII-2A/TX AC40 Mode_ANT 1

TX mode CH54

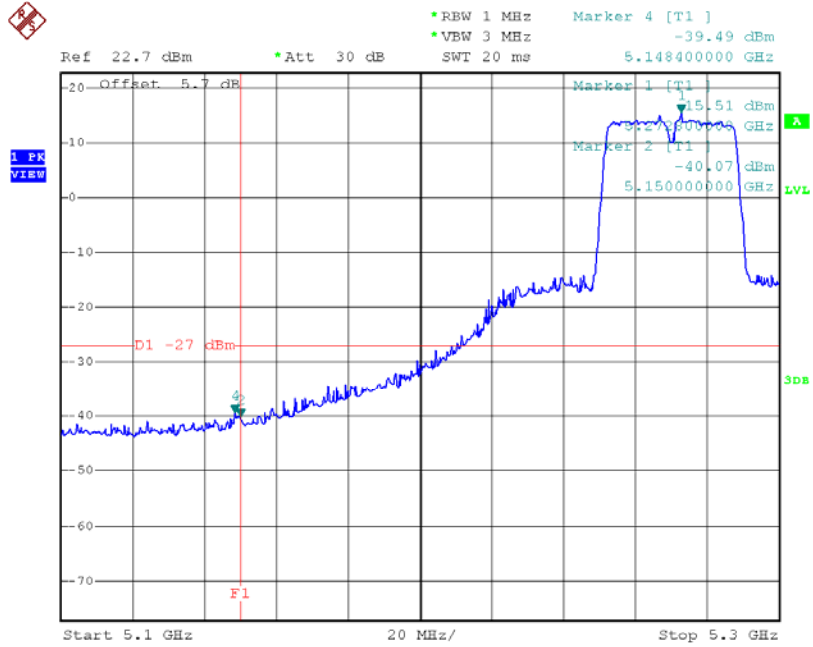

Date: 25.MAR.2016 16:00:38


TX mode CH62

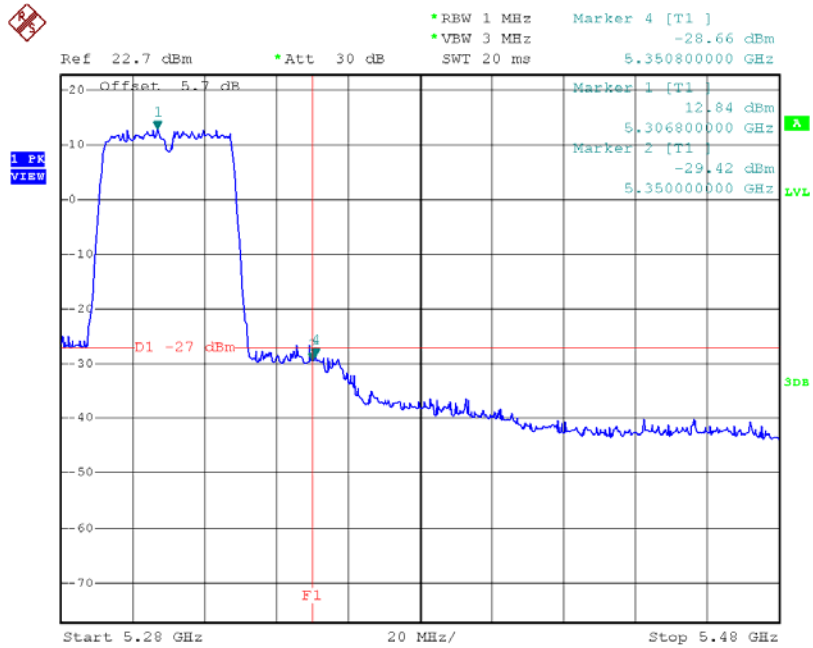

Date: 30.MAR.2016 16:43:24


Test Mode: UNII-2A/TX AC40 Mode_ANT 2

TX mode CH54

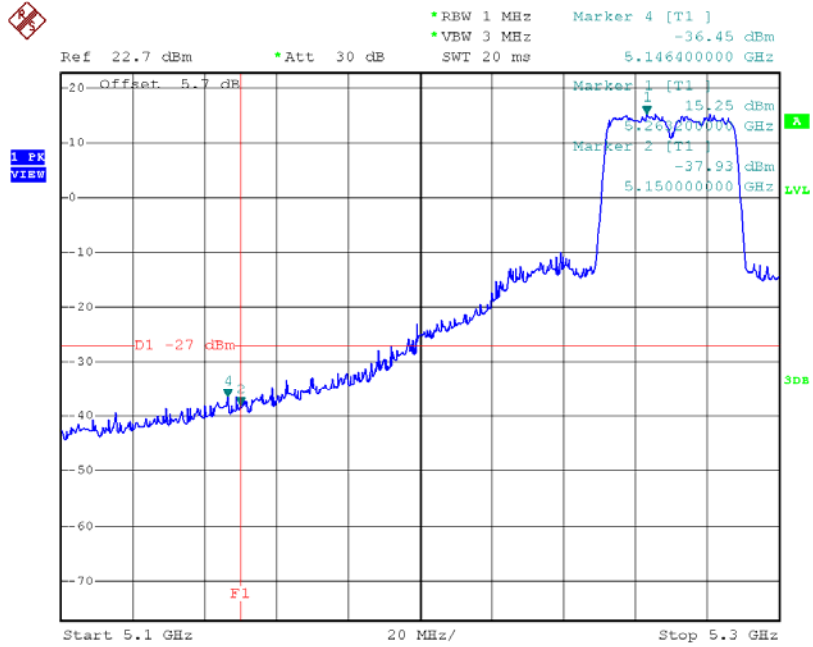

Date: 6.APR.2016 20:55:03


TX mode CH62

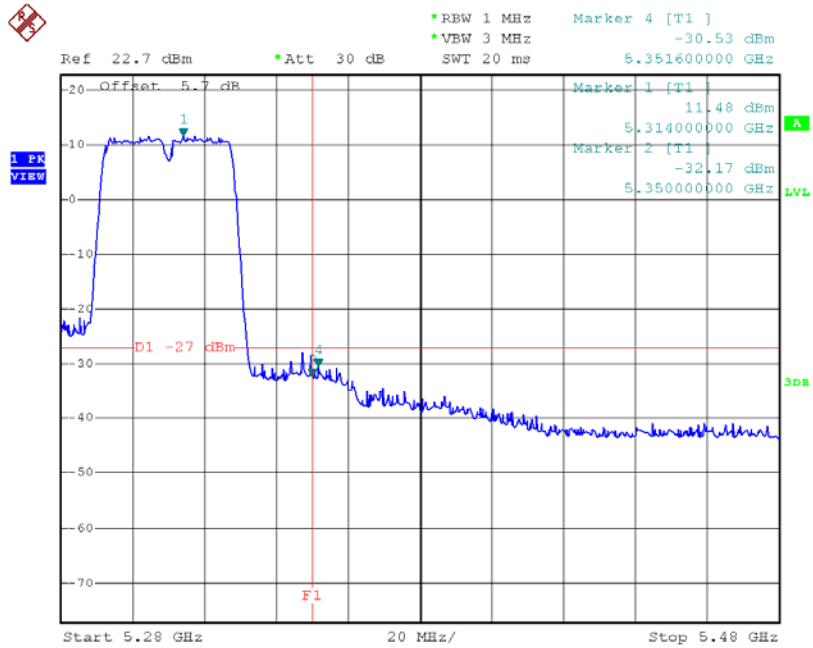


Date: 6.APR.2016 20:56:04

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

TX mode CH58

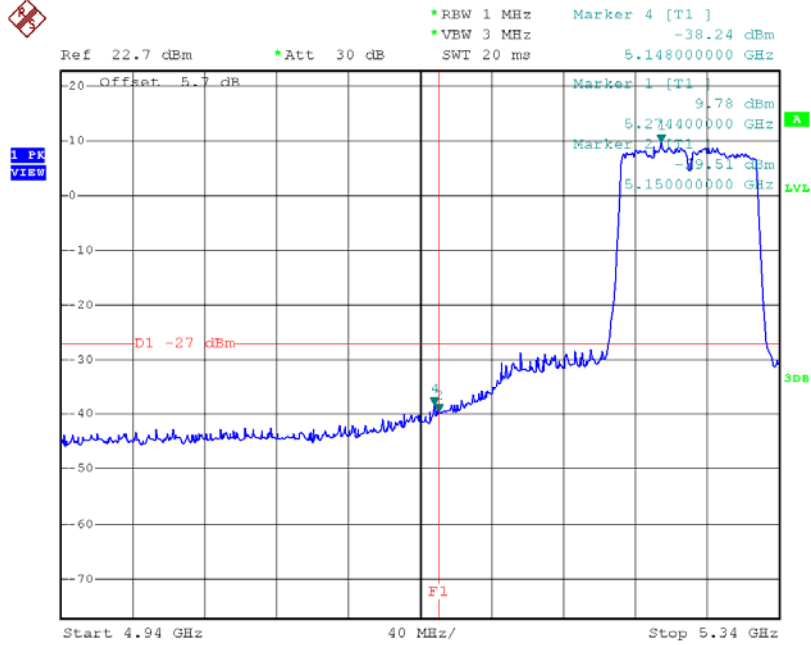


Date: 30.MAR.2016 17:04:59

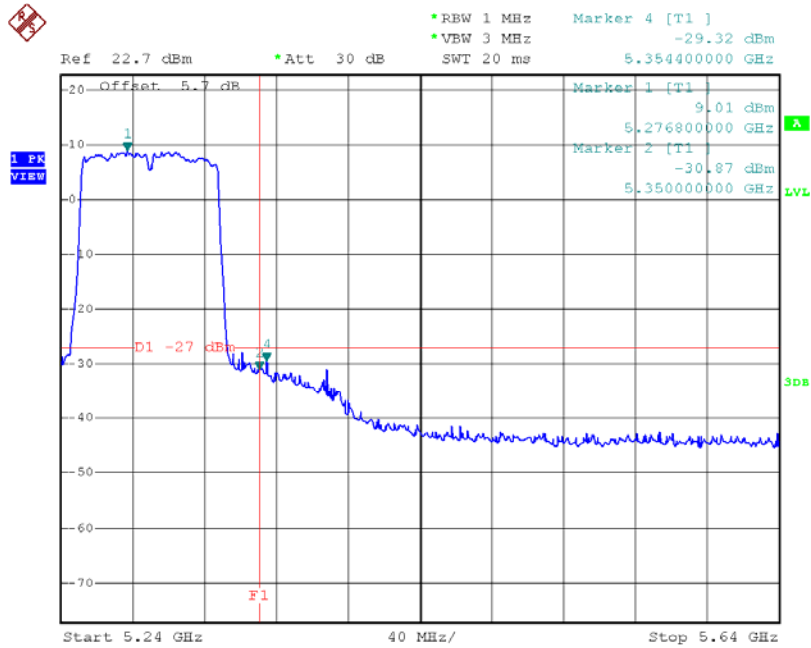


Date: 30.MAR.2016 17:05:07

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

TX mode CH58

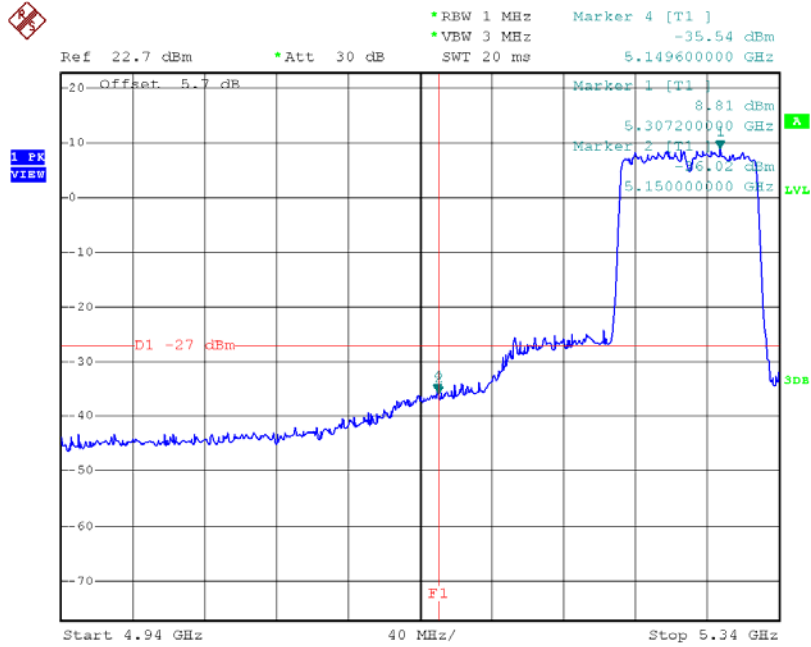


Date: 6.APR.2016 21:08:54

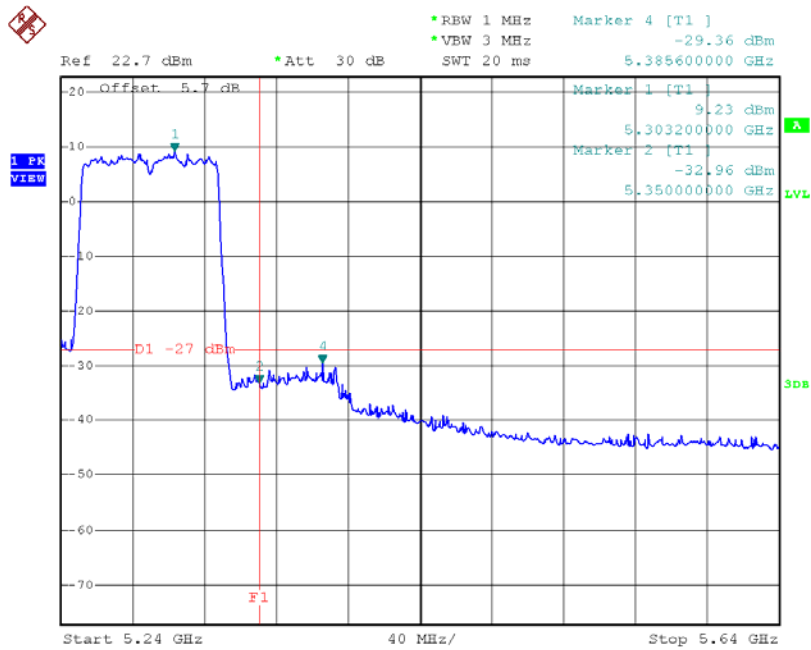

Date: 6.APR.2016 21:09:02


Test Mode: UNII-2C/TX AC20 Mode_ANT 1

TX mode CH100

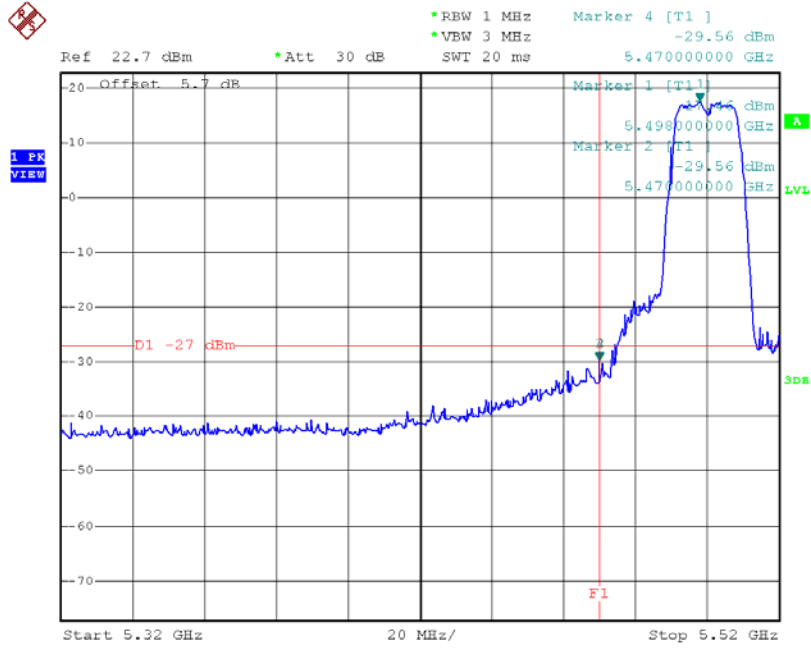

Date: 25.MAR.2016 15:08:03


TX mode CH140

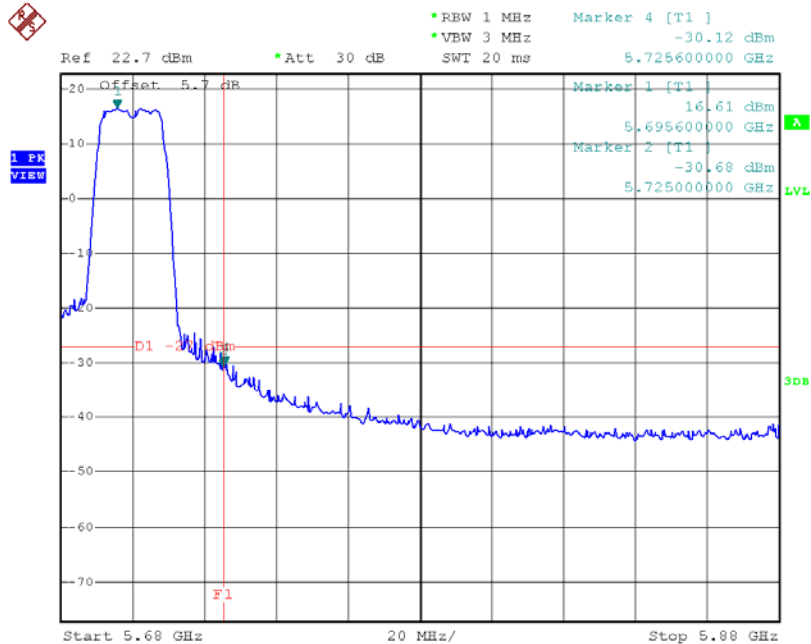

Date: 25.MAR.2016 15:09:35


Test Mode: UNII-2C/TX AC20 Mode_ANT 2

TX mode CH100

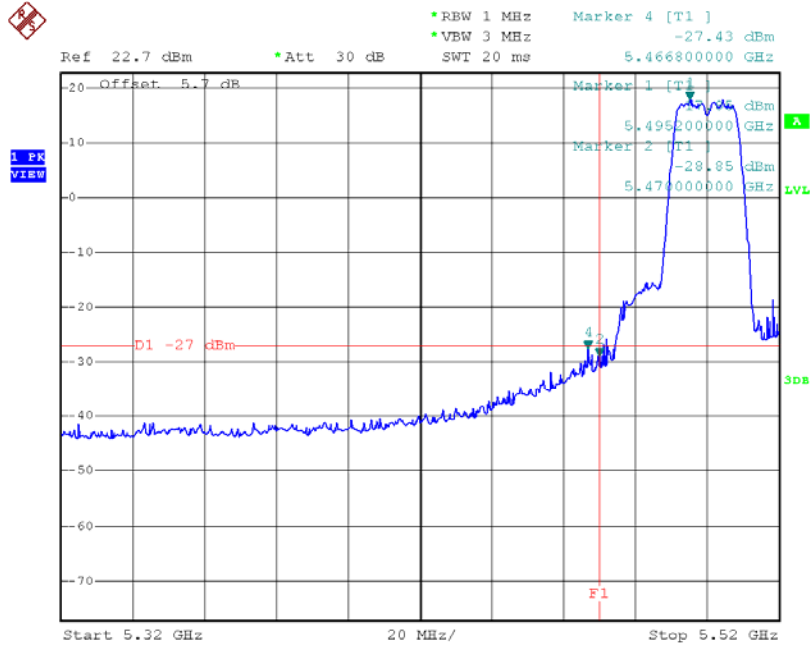

Date: 6.APR.2016 20:23:56


TX mode CH140

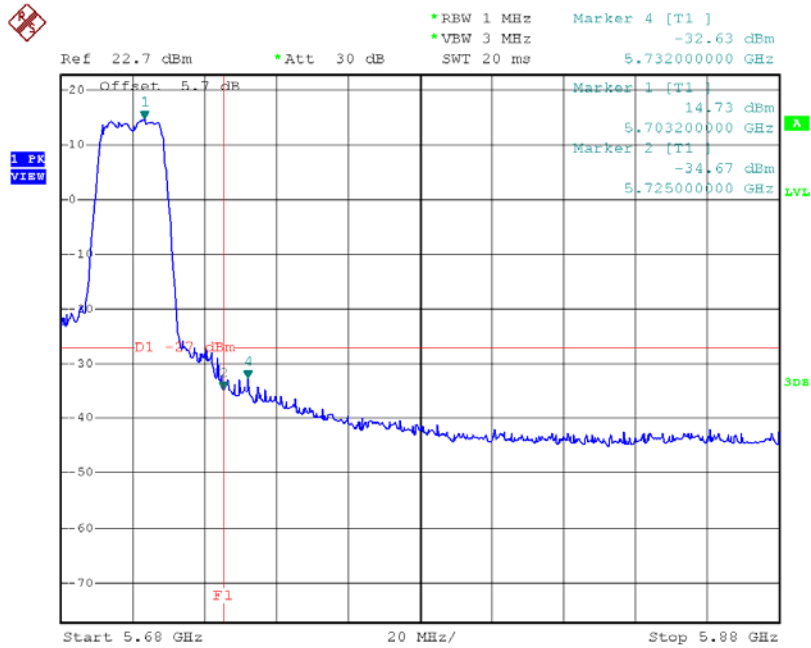

Date: 6.APR.2016 20:27:16


Test Mode: UNII-2C/TX AC40 Mode_ANT 1

TX mode CH102

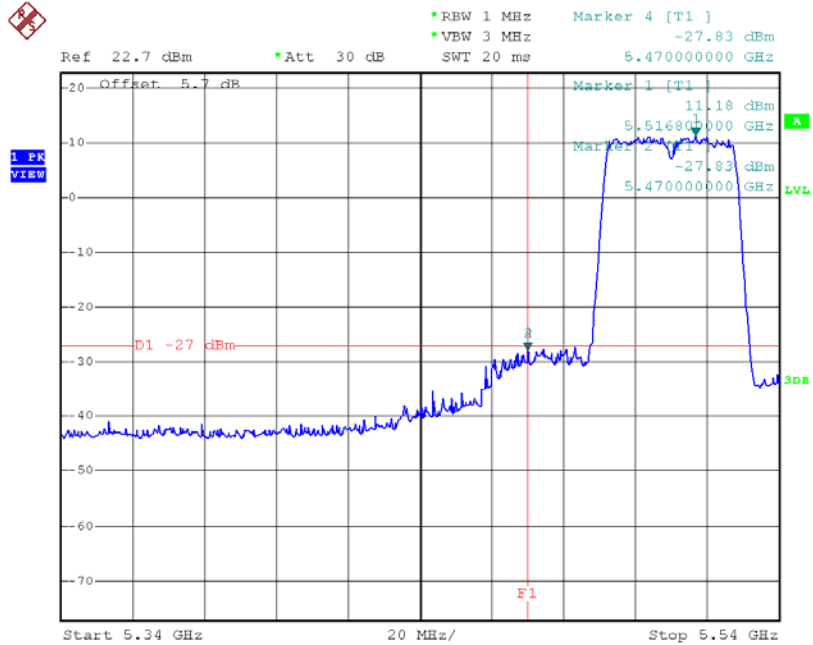

Date: 30.MAR.2016 16:44:01


TX mode CH134

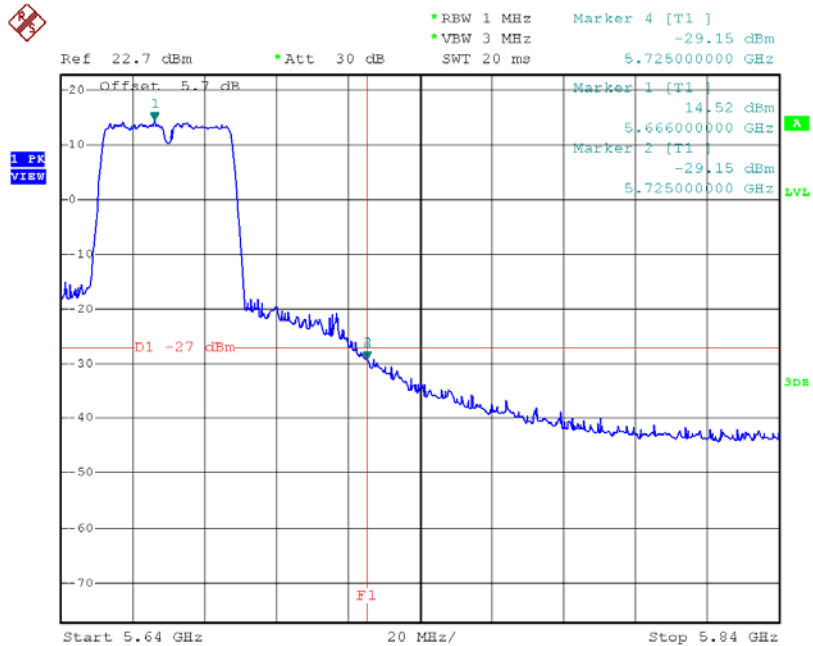

Date: 30.MAR.2016 16:49:44


Test Mode: UNII-2C/TX AC40 Mode_ANT 2

TX mode CH102

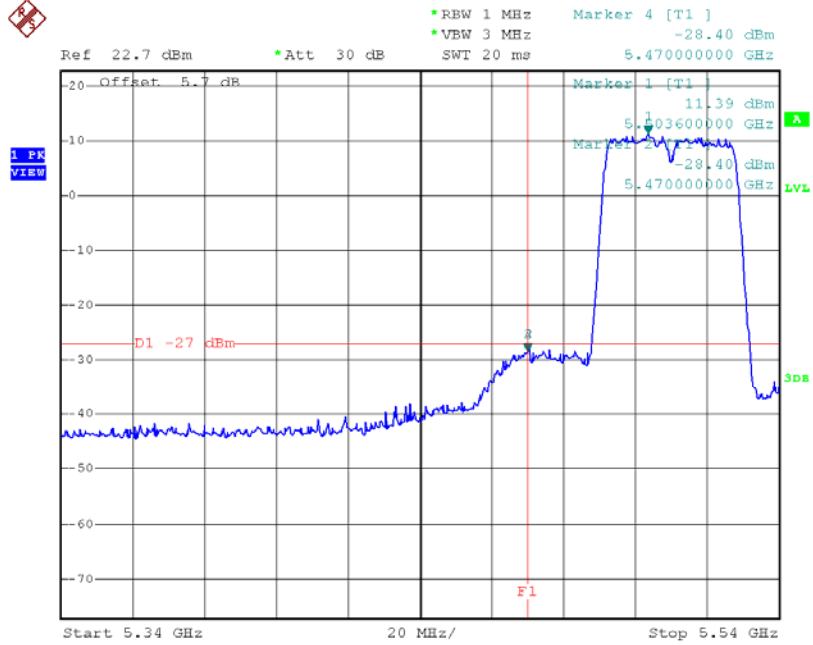

Date: 6.APR.2016 20:58:20


TX mode CH134

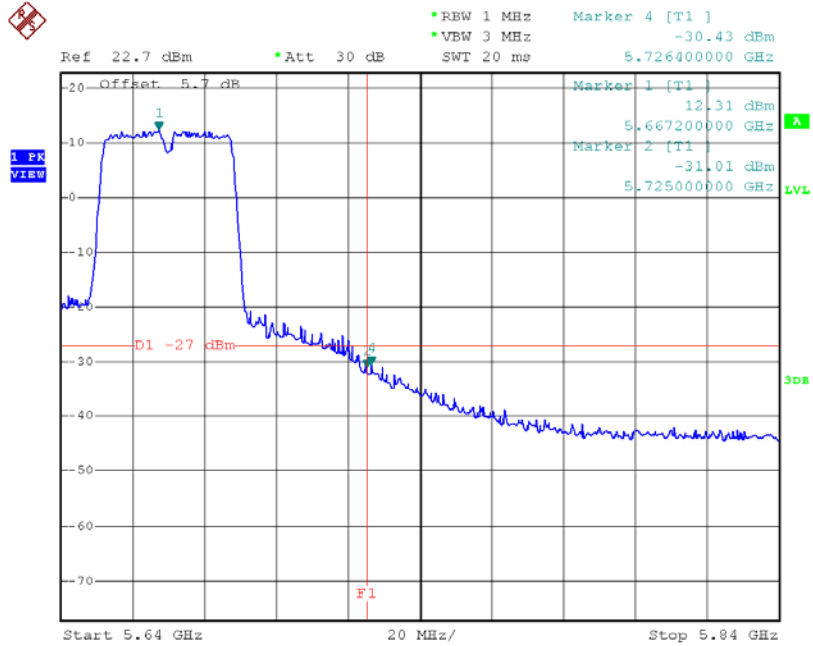

Date: 6.APR.2016 21:00:30


Test Mode: UNII-2C/TX AC80 Mode_ANT 1

TX mode CH106

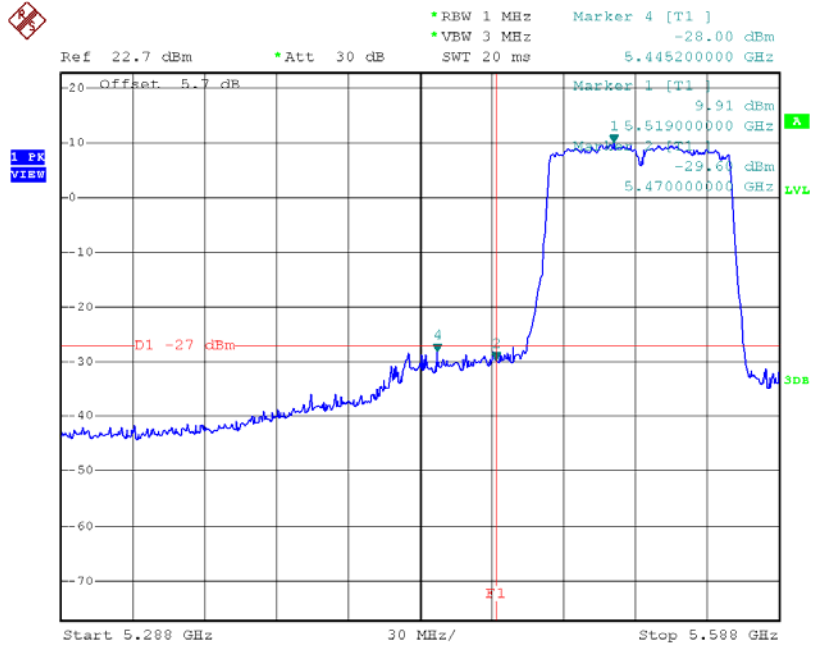

Date: 30.MAR.2016 17:07:29


TX mode CH122

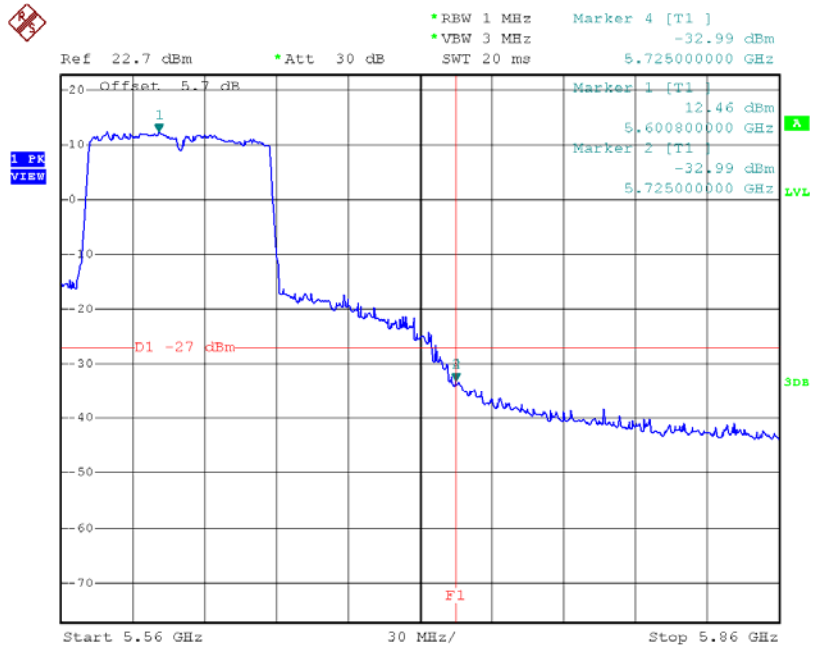

Date: 30.MAR.2016 17:12:33


Test Mode: UNII-2C/TX AC80 Mode_ANT 2

TX mode CH106

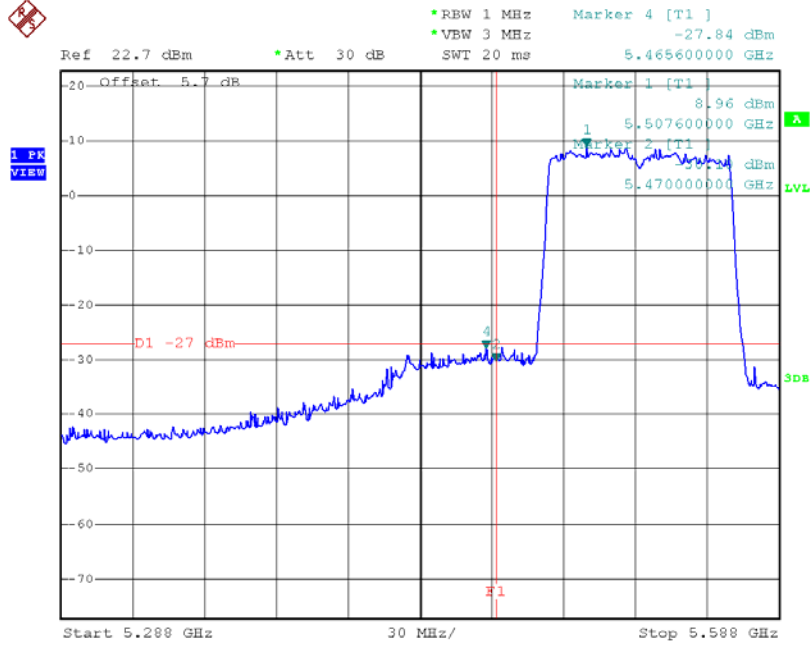

Date: 6.APR.2016 21:16:46


TX mode CH122

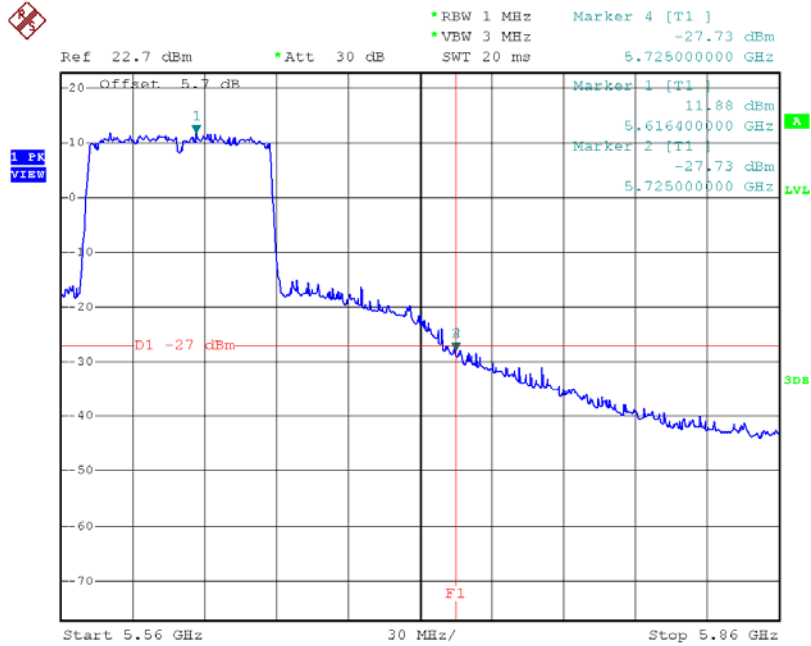

Date: 6.APR.2016 21:18:47


Test Mode: UNII-3/TX AC20 Mode_ANT 1

TX AC HT20 mode CH149

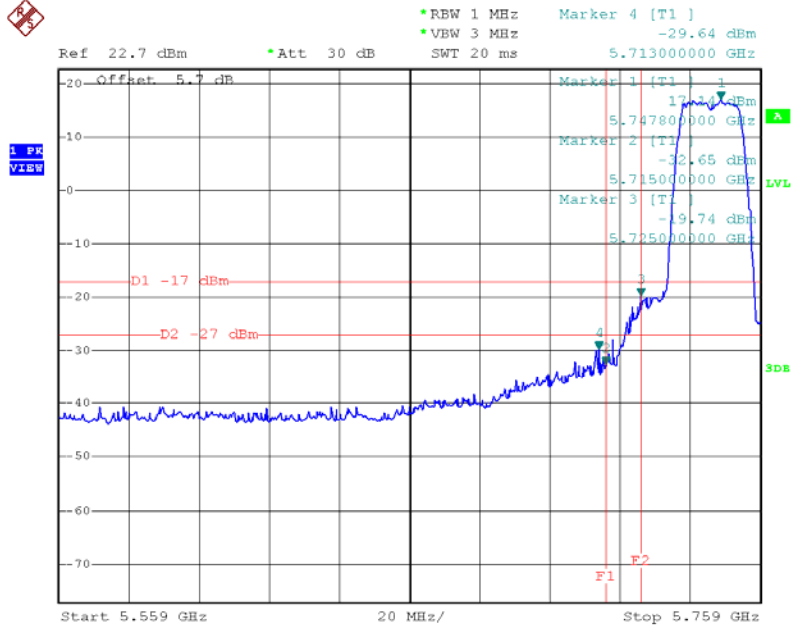

Date: 25.MAR.2016 15:10:06


TX AC HT20 mode CH165

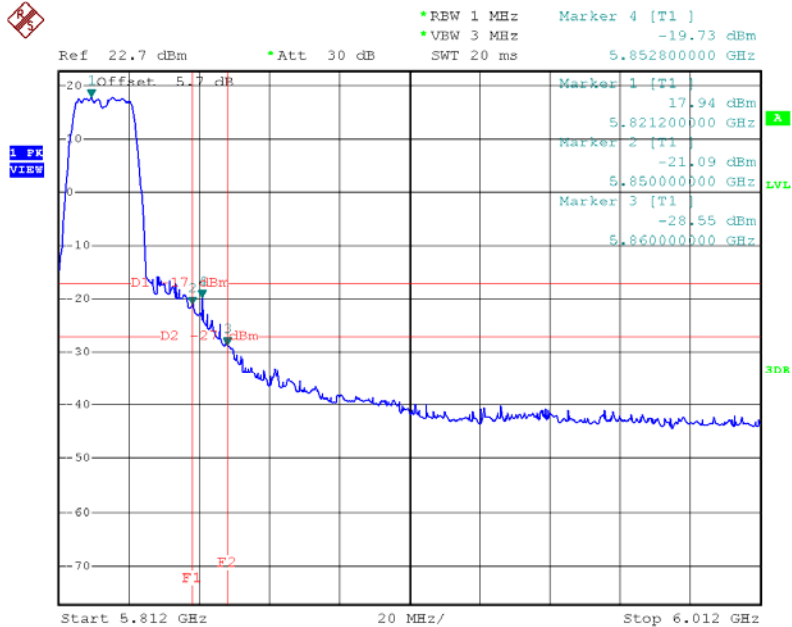

Date: 25.MAR.2016 15:11:37


Test Mode: UNII-3/TX AC20 Mode_ANT 2

TX AC HT20 mode CH149

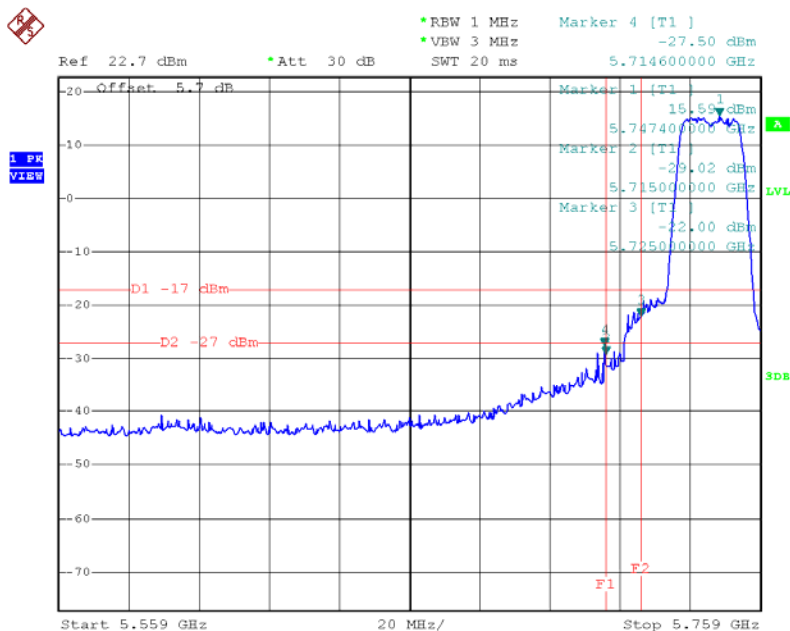

Date: 6.APR.2016 20:28:30


TX AC HT20 mode CH165

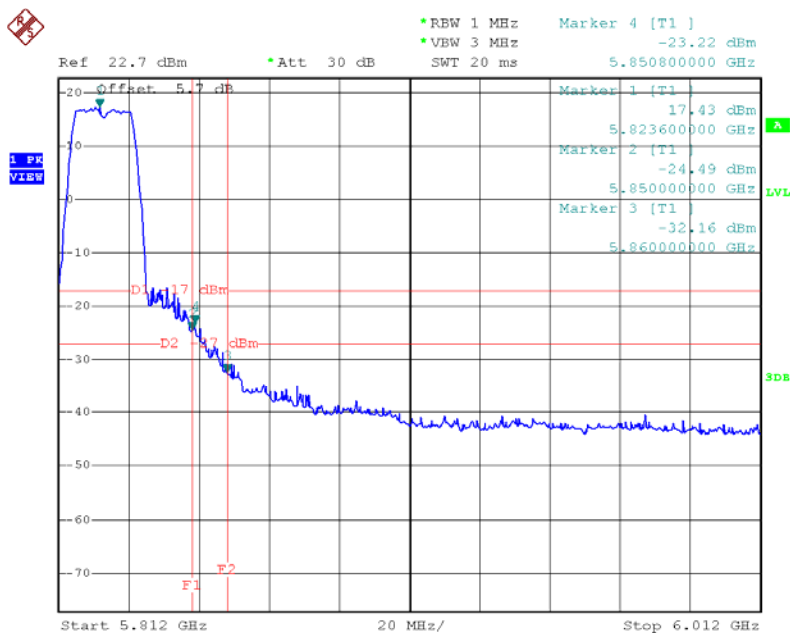

Date: 6.APR.2016 20:32:31


Test Mode: UNII-3/TX AC40 Mode_ANT 1

TX AC HT40 mode CH151

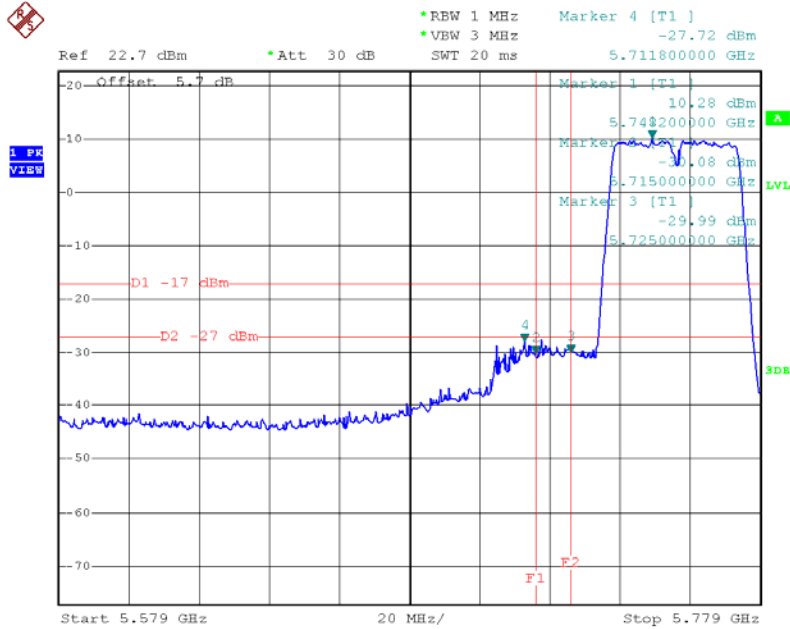

Date: 30.MAR.2016 16:55:09


TX AC HT40 mode CH159

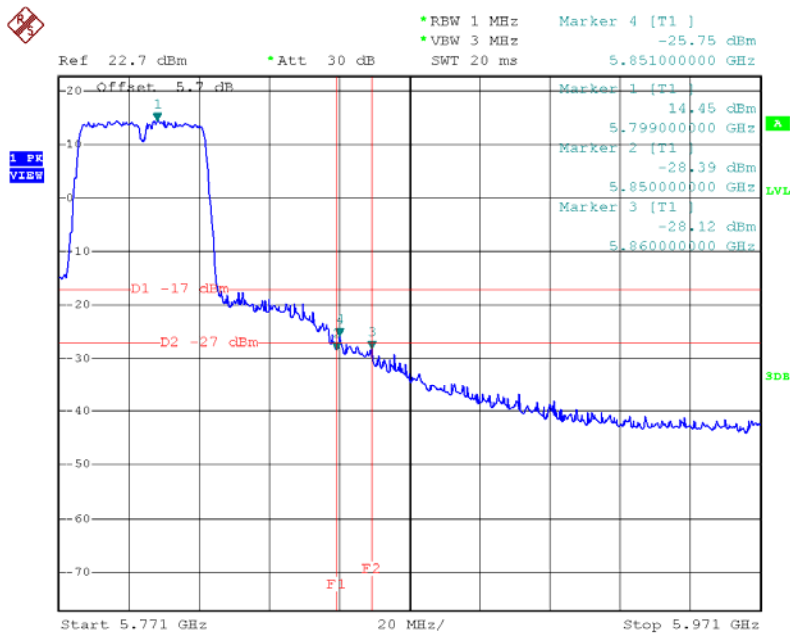

Date: 30.MAR.2016 16:56:55


Test Mode: UNII-3/TX AC40 Mode_ANT 2

TX AC HT40 mode CH151

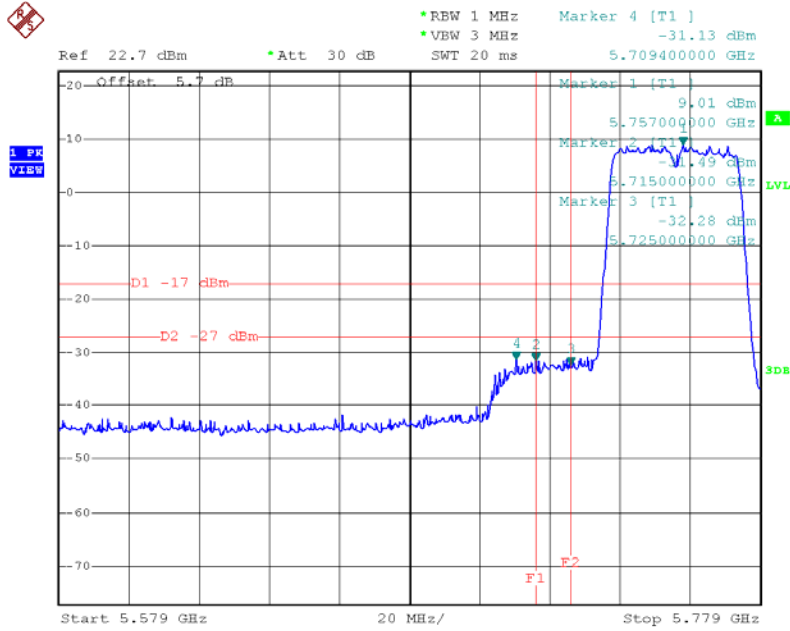

Date: 6.APR.2016 21:01:43


TX AC HT40 mode CH159

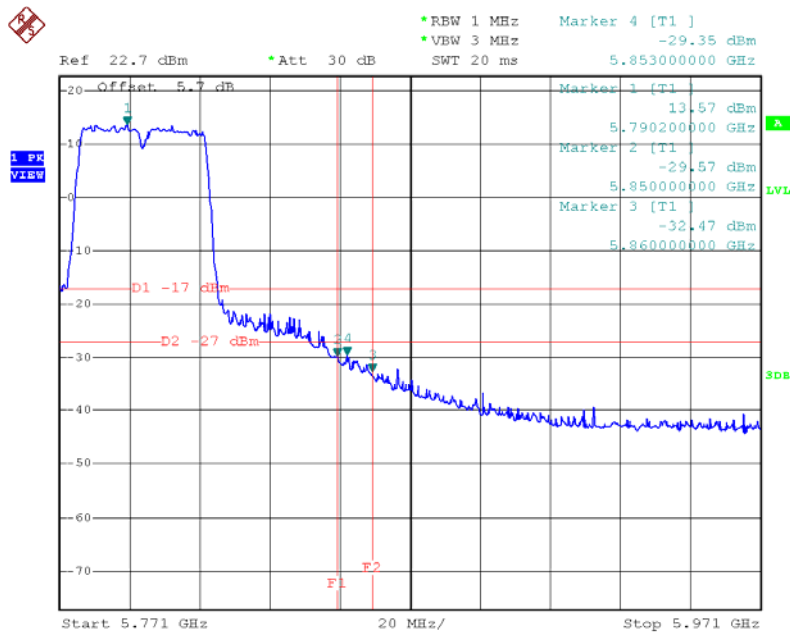


Date: 6.APR.2016 21:03:08

Test Mode: UNII-3/TX AC80 Mode_ANT 1

TX AC HT80 mode CH155

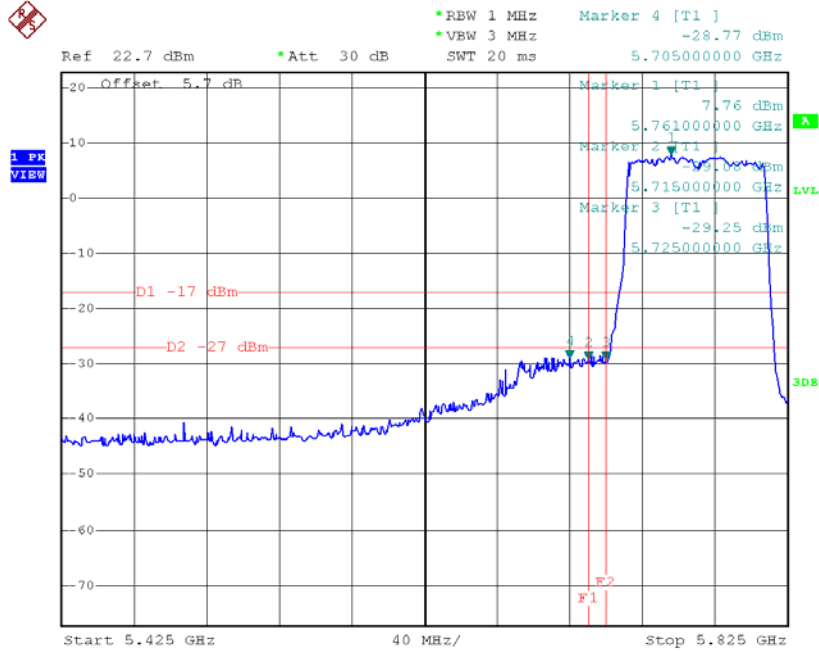


Date: 30.MAR.2016 17:13:24

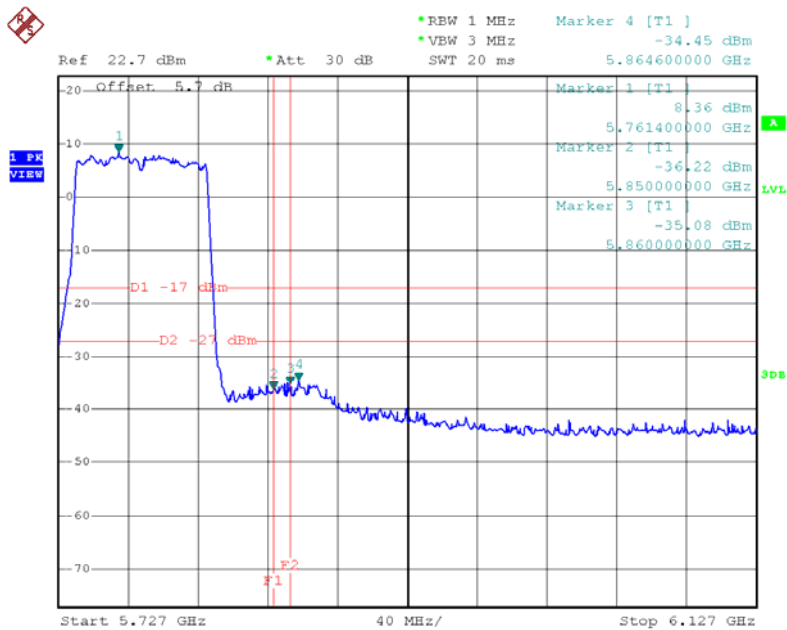


Date: 30.MAR.2016 17:13:32

Test Mode: UNII-3/TX AC80 Mode_ANT 2

TX AC HT80 mode CH155

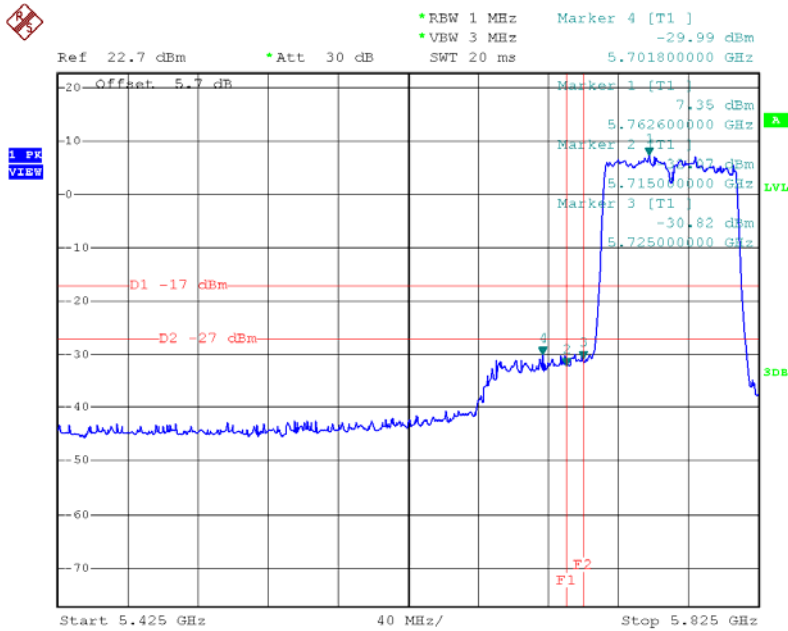

Date: 6.APR.2016 21:20:16

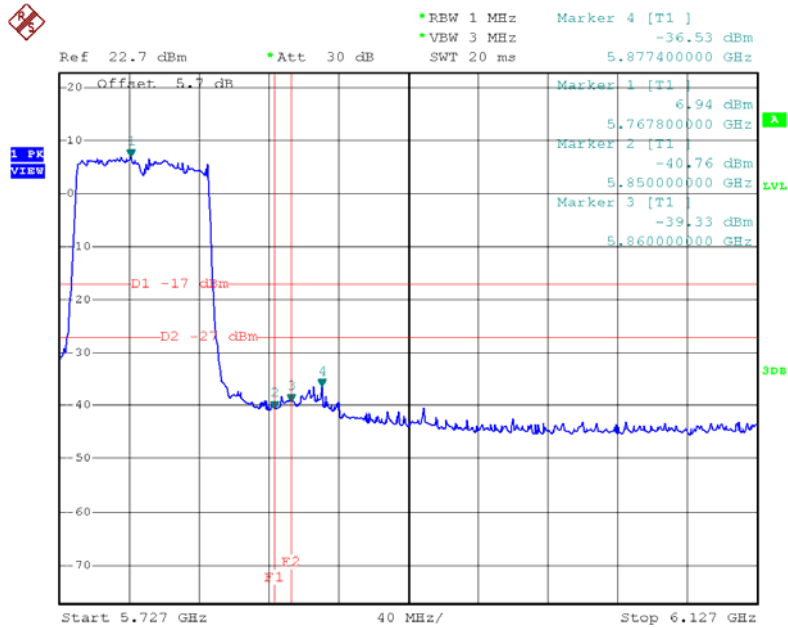


Date: 6.APR.2016 21:20:24

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.75	0.25	4.00	11.00
CH40	5200	4.77	0.25	5.02	11.00
CH48	5240	5.50	0.25	5.75	11.00

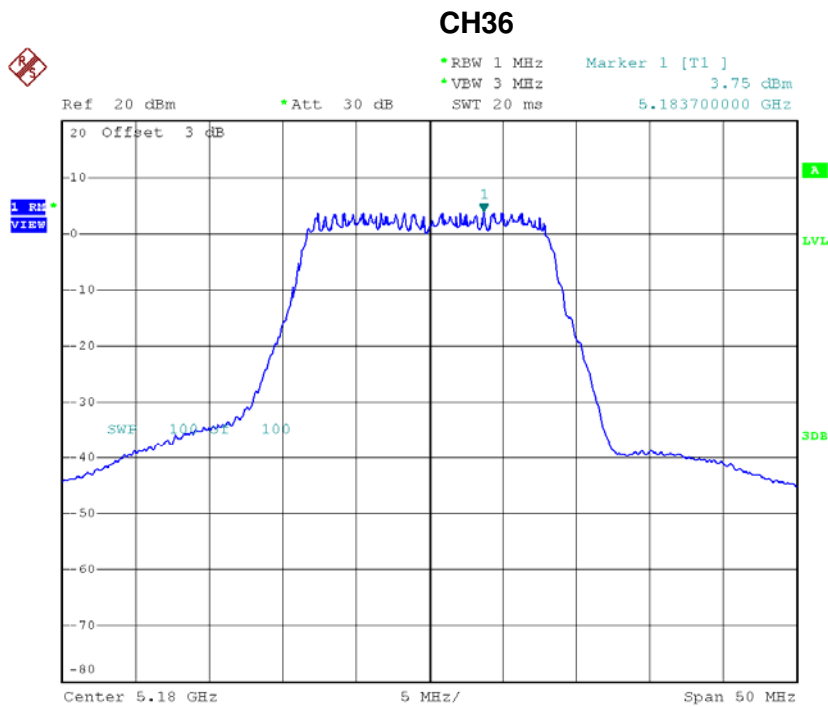


Date: 11.APR.2016 17:58:51

CH40

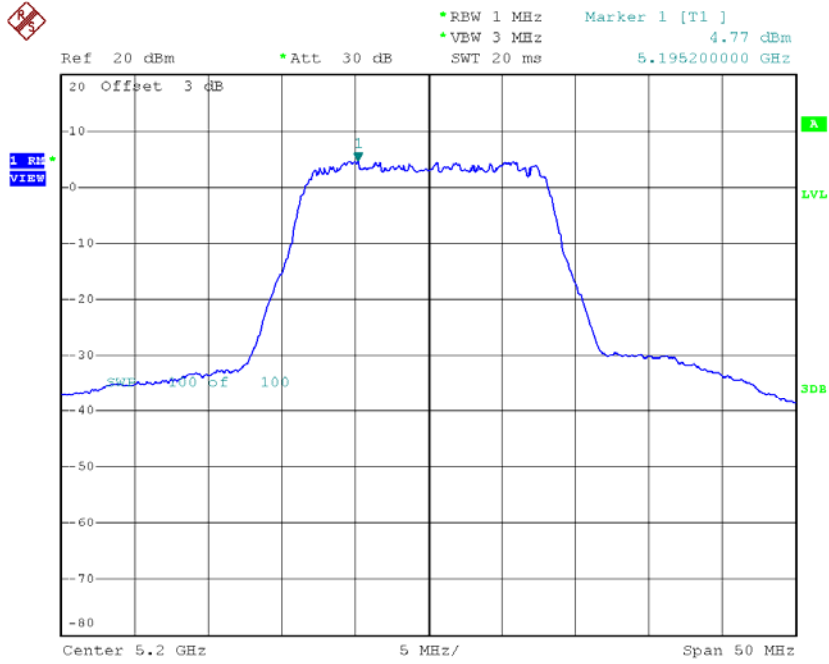

Date: 11.APR.2016 17:59:16


CH48

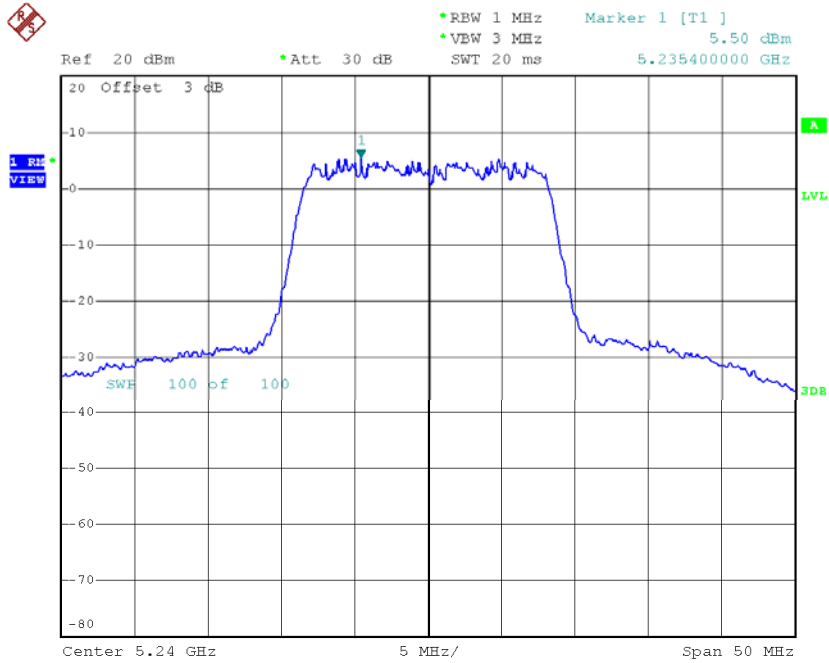

Date: 11.APR.2016 17:59:41


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	6.06	0.25	6.31	11.00
CH40	5200	7.24	0.25	7.49	11.00
CH48	5240	7.29	0.25	7.54	11.00

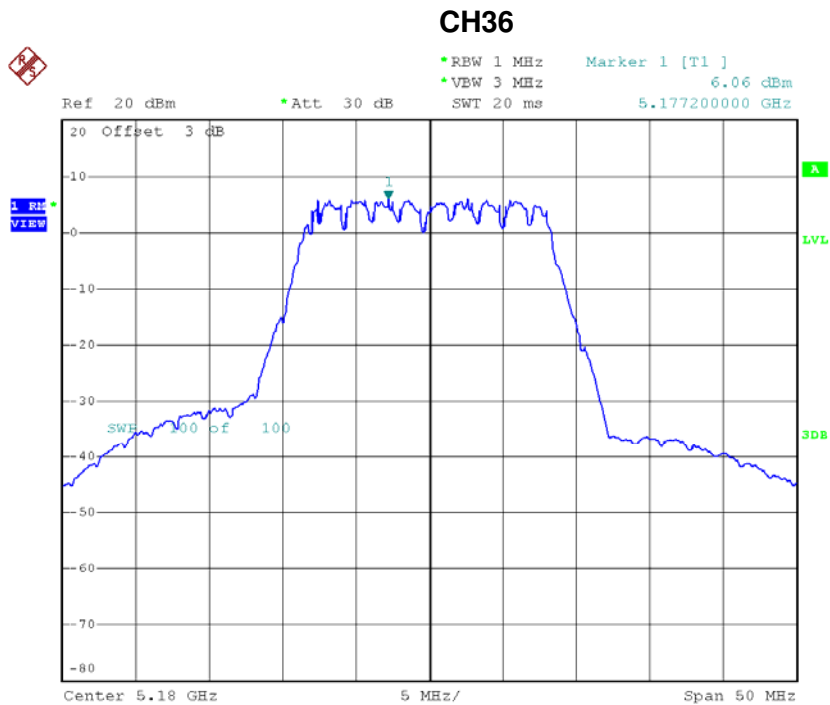


Date: 6.APR.2016 18:13:46

CH40

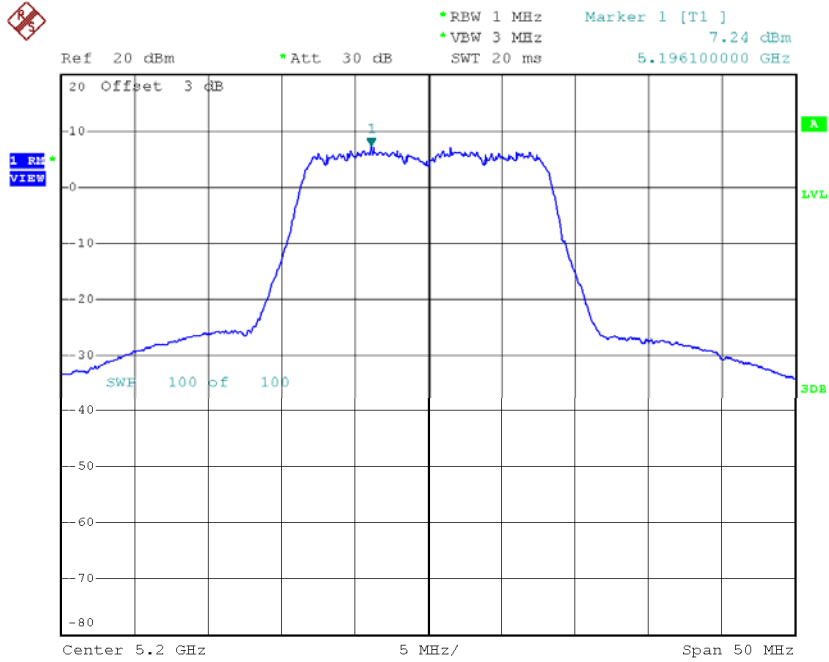

Date: 6.APR.2016 18:15:49

CH48

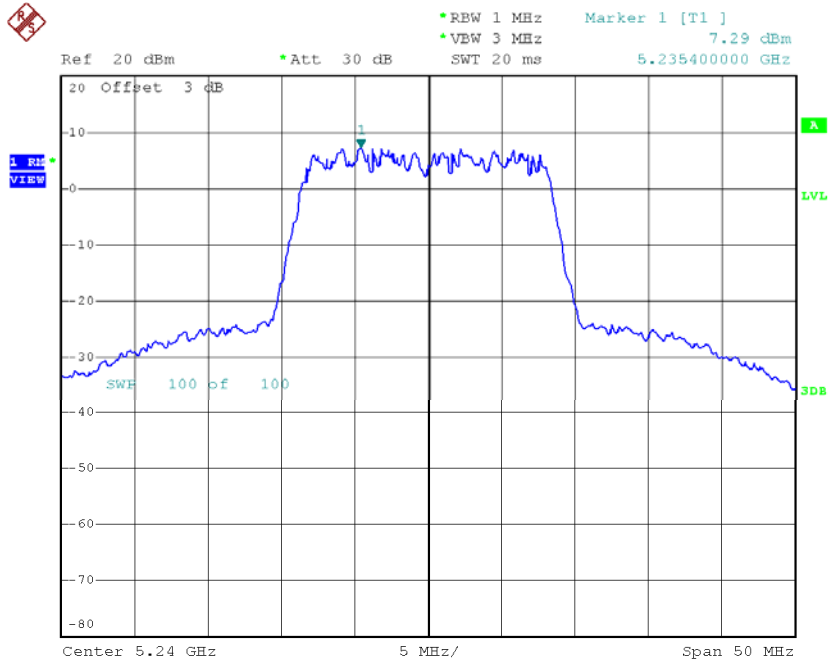


Date: 6.APR.2016 18:16:52

Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	8.32	0.25	8.32	11.00
CH40	5200	9.44	0.25	9.44	11.00
CH48	5240	9.75	0.25	9.75	11.00


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.70	0.46	4.16	11.00
CH40	5200	8.22	0.46	8.68	11.00
CH48	5240	7.83	0.46	8.29	11.00

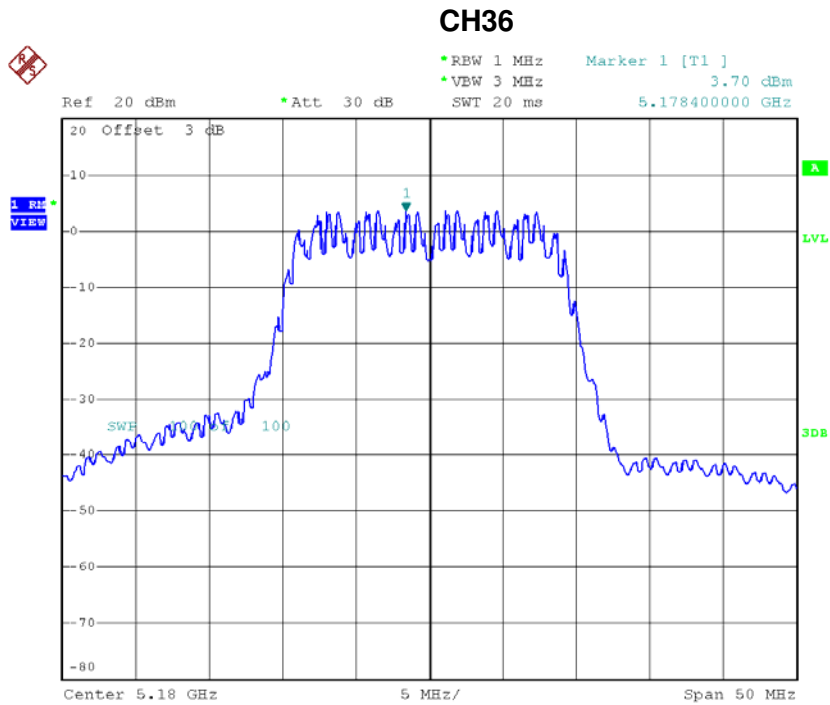


Date: 11.APR.2016 18:04:51

CH40

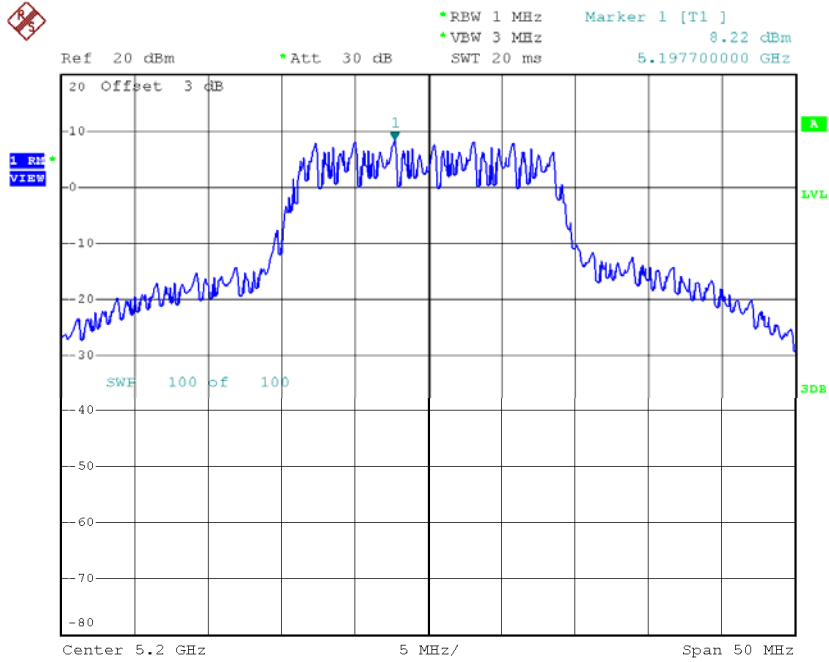

Date: 11.APR.2016 18:05:47


CH48

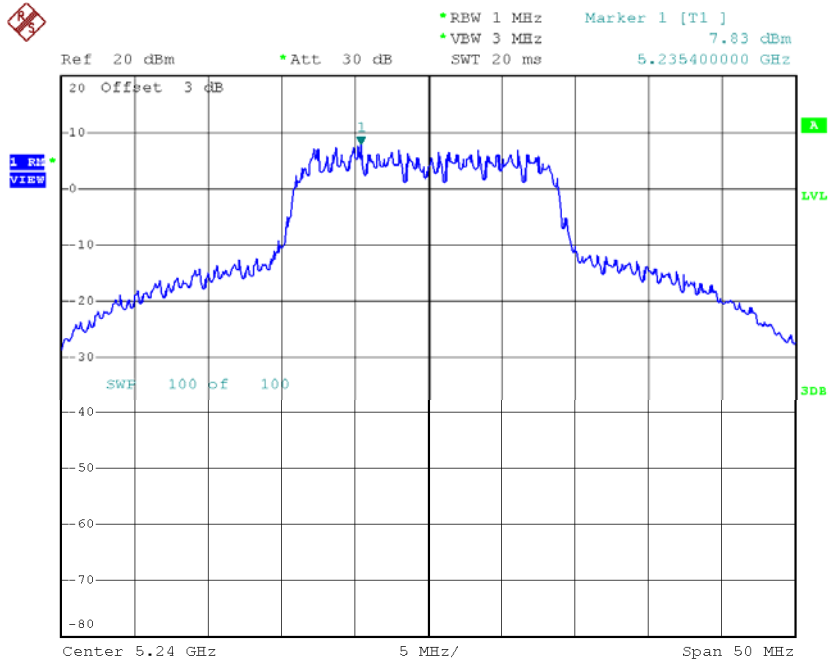

Date: 11.APR.2016 18:06:57


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	5.63	0.46	6.09	11.00
CH40	5200	5.39	0.46	5.85	11.00
CH48	5240	6.57	0.46	7.03	11.00

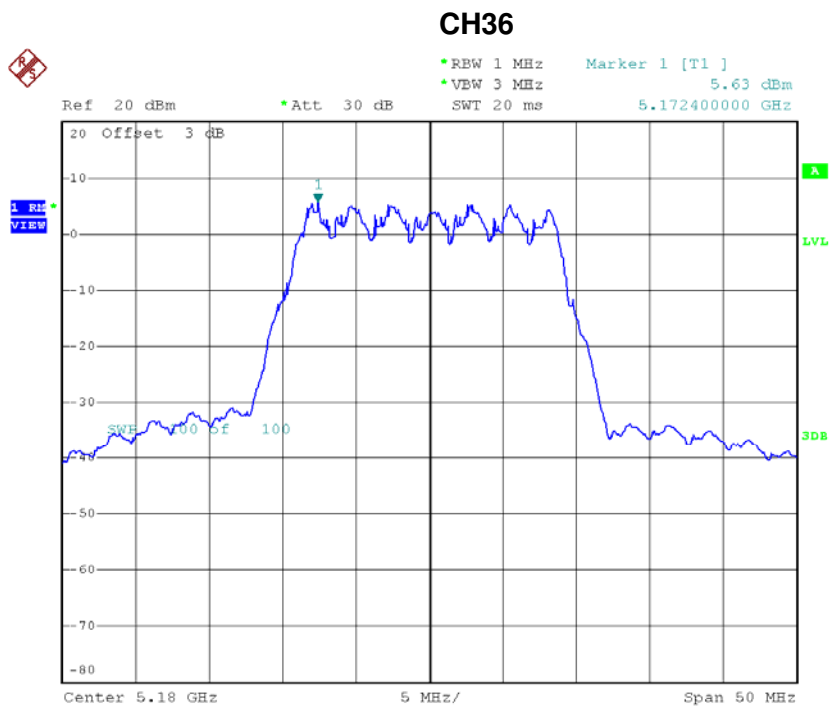


Date: 6.APR.2016 19:24:07

CH40

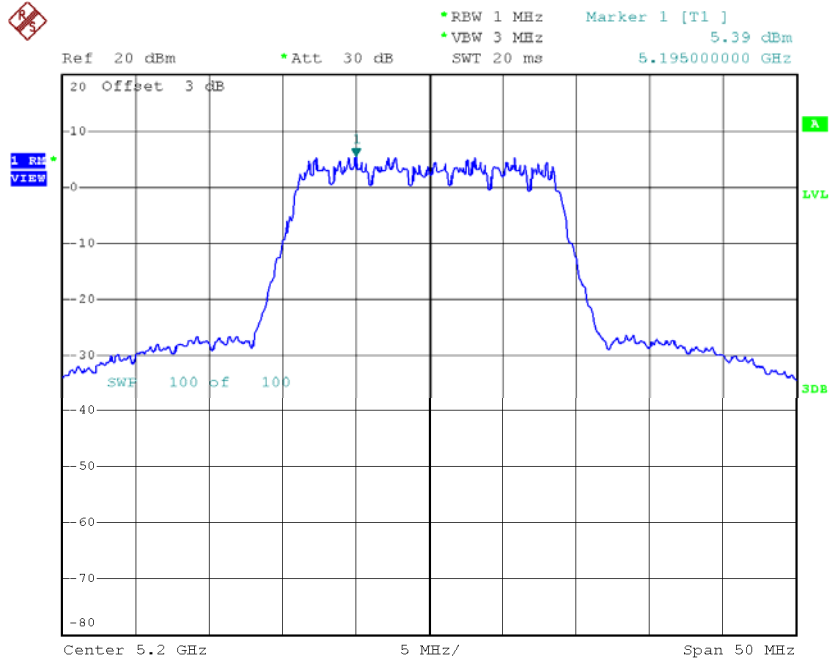

Date: 6.APR.2016 19:27:50

CH48

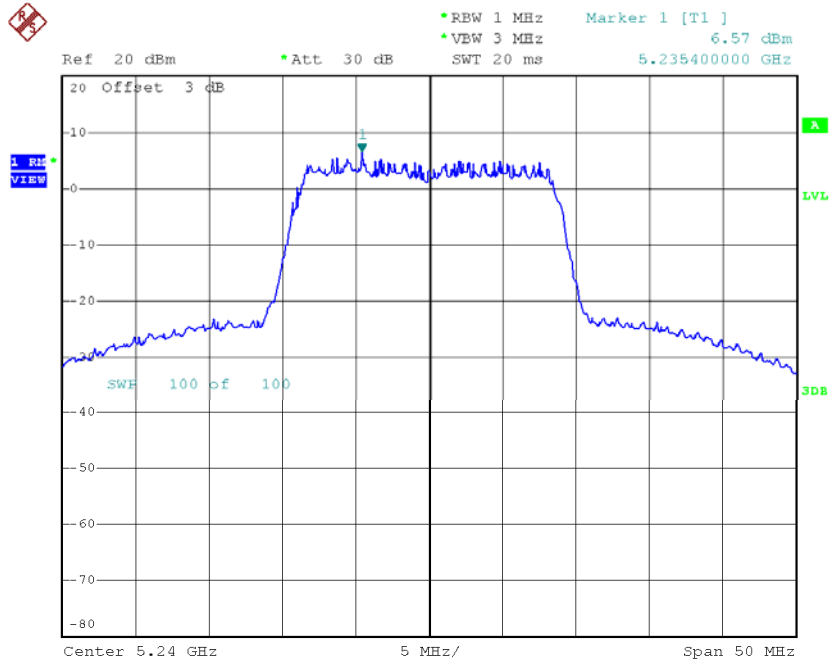

Date: 6.APR.2016 19:29:02


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	8.24	0.46	8.24	11.00
CH40	5200	10.50	0.46	10.50	11.00
CH48	5240	10.72	0.46	10.72	11.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-4.69	1.25	-3.44	11.00
CH46	5230	4.48	1.25	5.73	11.00

CH38

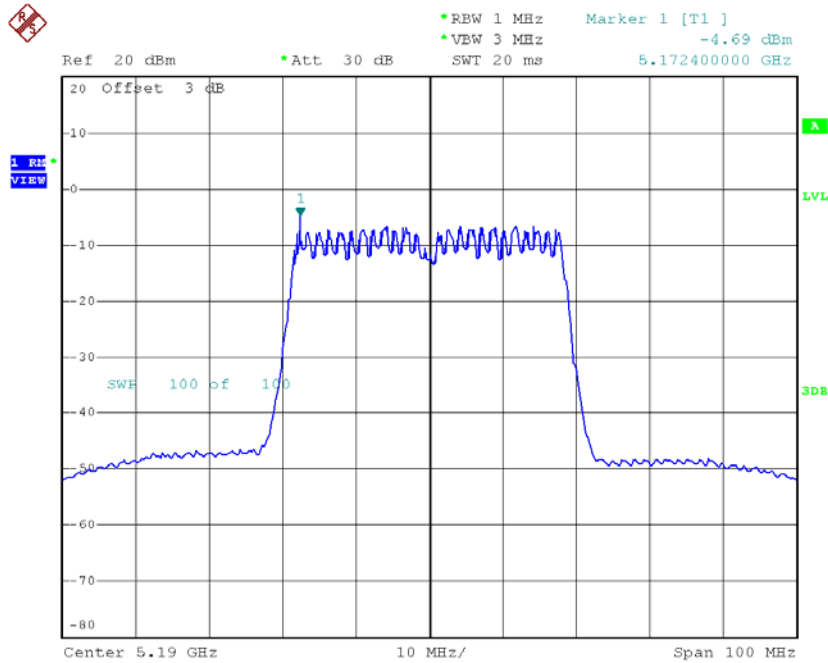

Date: 11.APR.2016 20:33:24

CH46

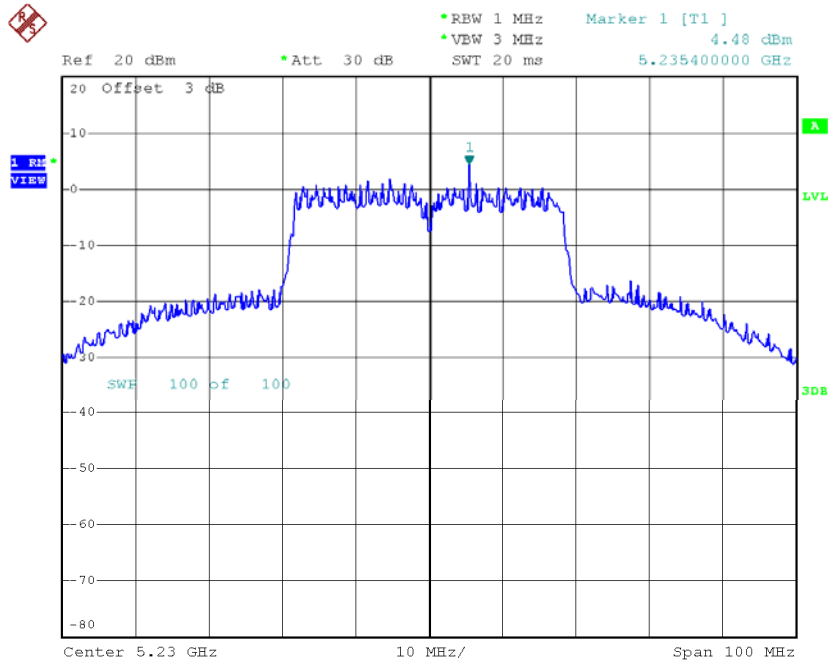


Date: 11.APR.2016 20:34:15

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-0.27	1.25	0.98	11.00
CH46	5230	2.70	1.25	3.95	11.00

CH38

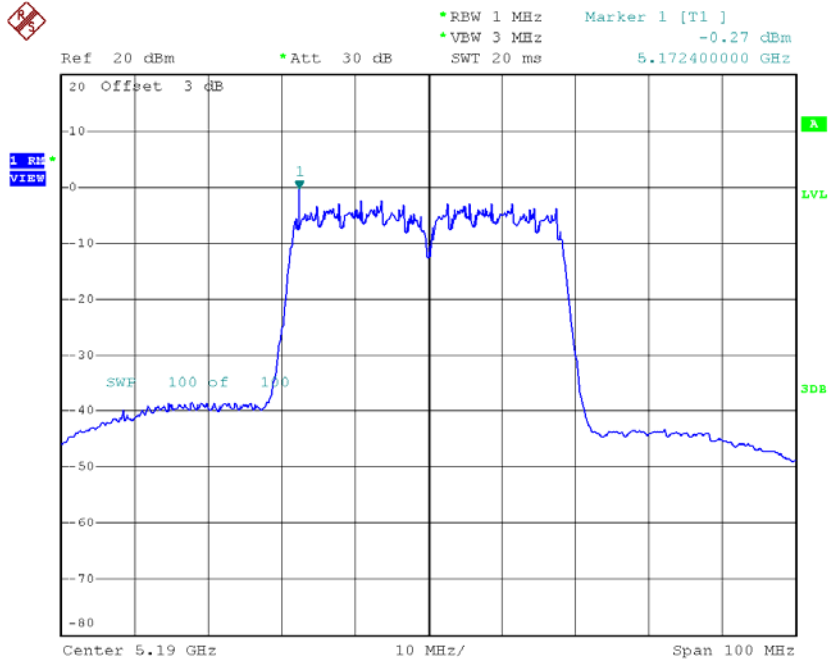

Date: 6.APR.2016 20:34:25

CH46

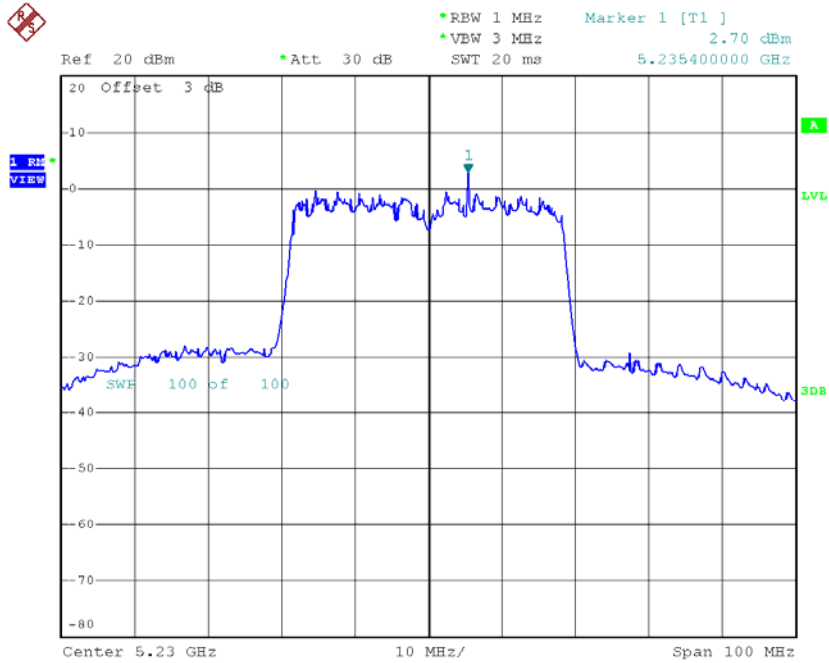


Date: 6.APR.2016 20:38:24

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	2.32	1.25	2.32	11.00
CH46	5230	7.94	1.25	7.94	11.00


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.46	0.25	5.71	11.00
CH60	5300	5.58	0.25	5.83	11.00
CH64	5320	5.14	0.25	5.39	11.00

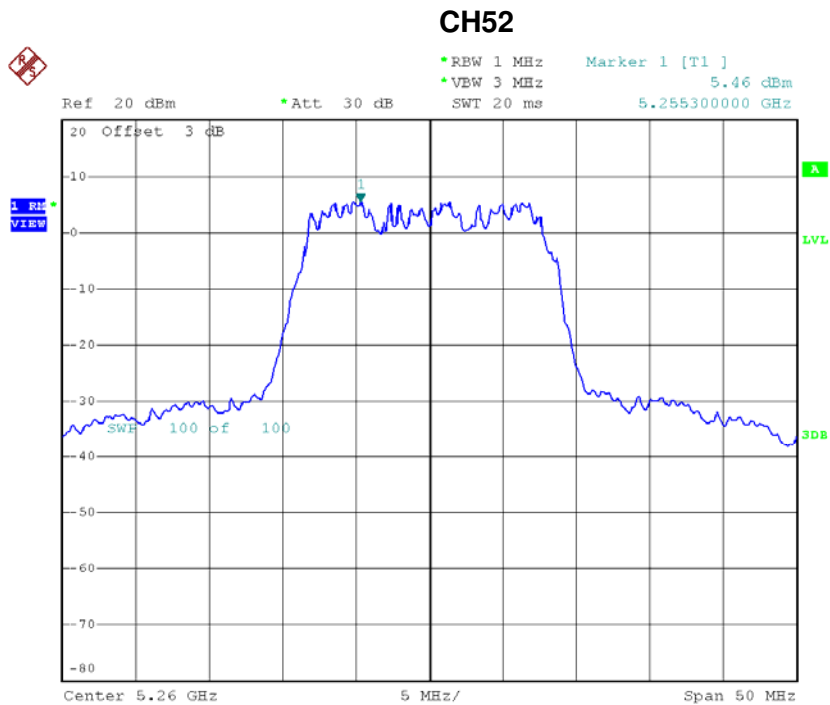


Date: 11.APR.2016 18:00:20

CH60

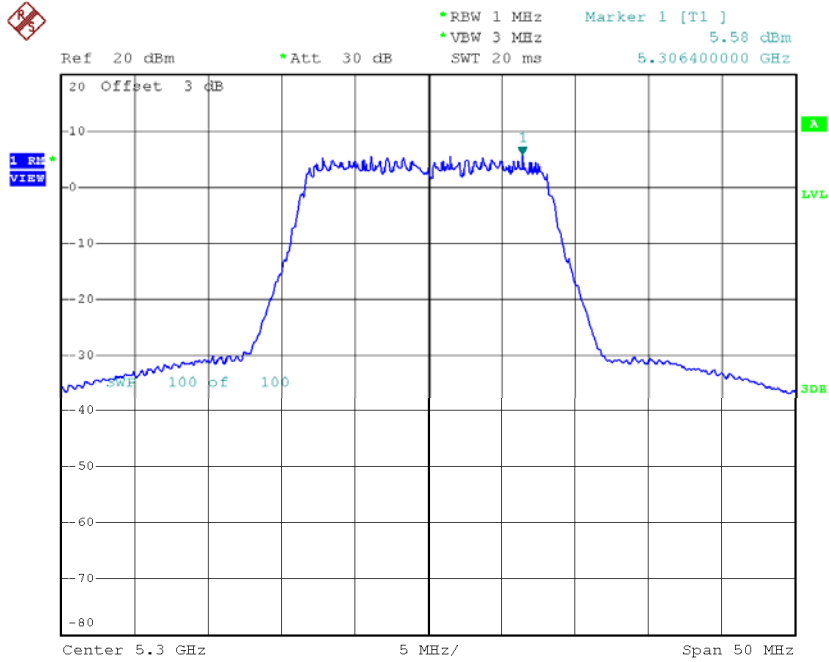

Date: 11.APR.2016 18:00:51


CH64

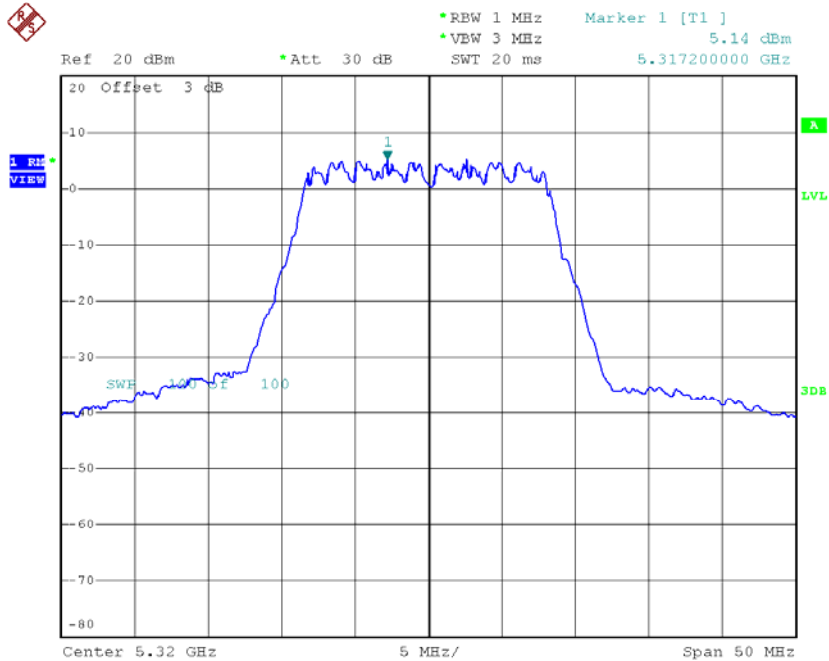

Date: 11.APR.2016 18:01:16


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.78	0.25	6.03	11.00
CH60	5300	4.69	0.25	4.94	11.00
CH64	5320	4.30	0.25	4.55	11.00

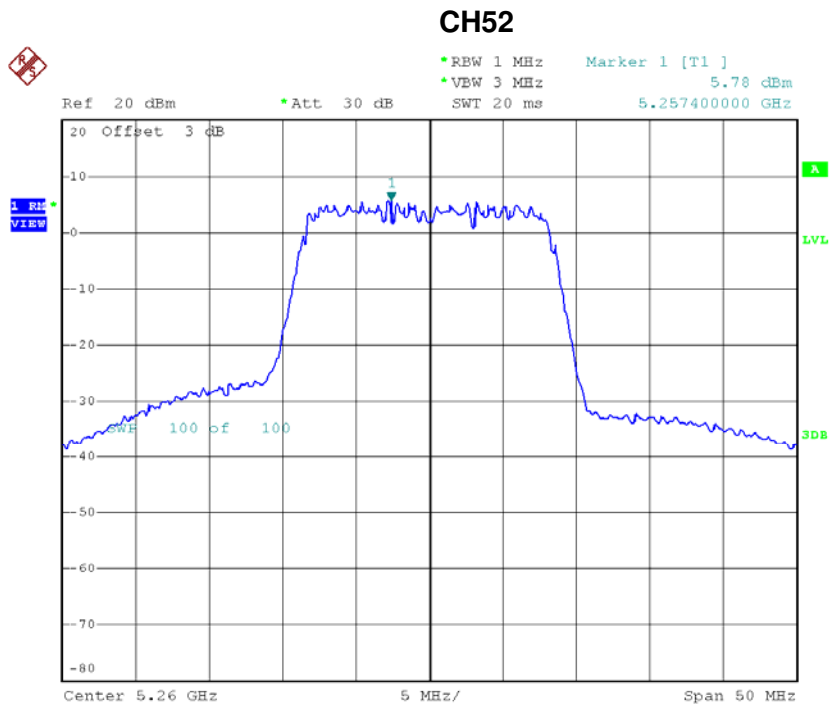


Date: 6.APR.2016 18:17:57

CH60

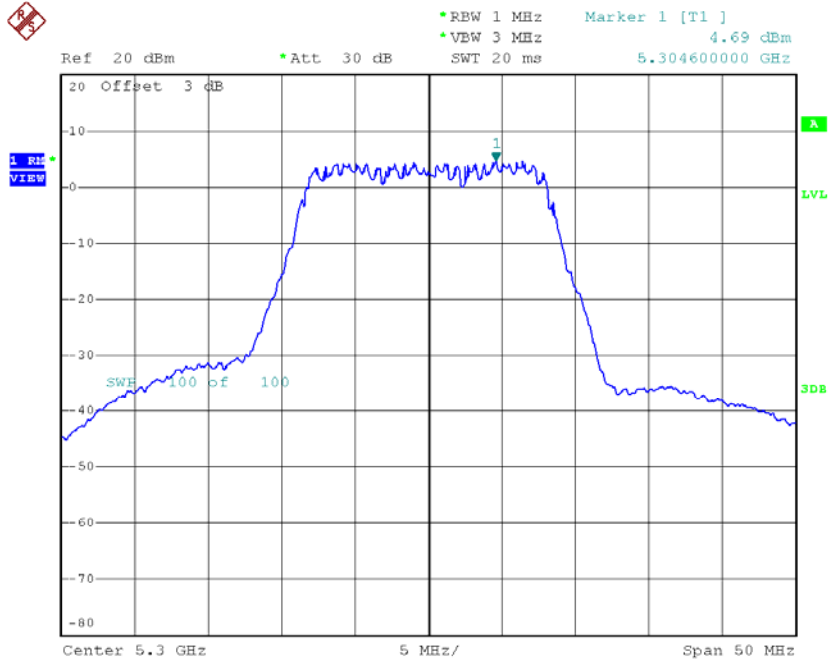

Date: 6.APR.2016 18:19:21

CH64

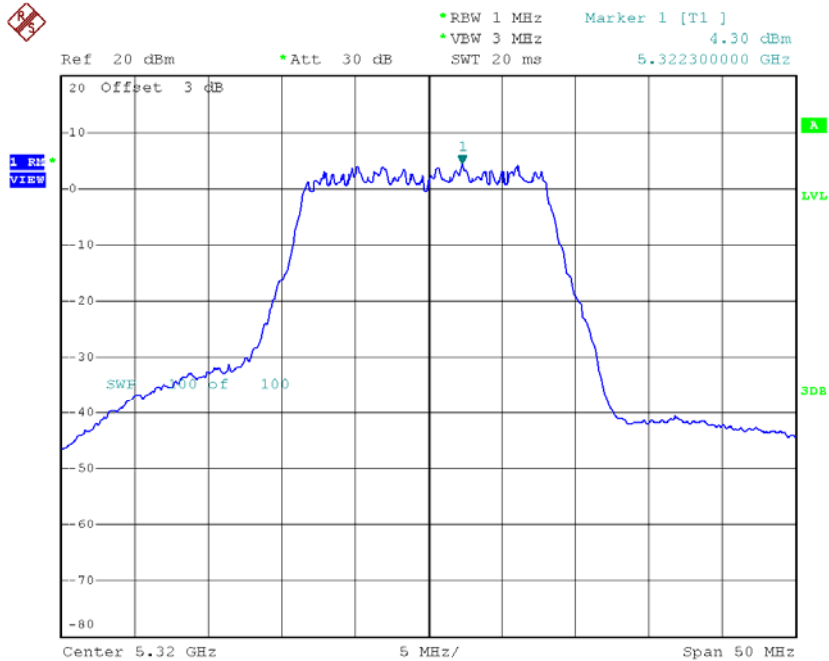


Date: 6.APR.2016 18:20:13

Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	8.88	0.25	8.88	11.00
CH60	5300	8.42	0.25	8.42	11.00
CH64	5320	8.00	0.25	8.00	11.00


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	4.88	0.46	5.34	11.00
CH60	5300	5.38	0.46	5.84	11.00
CH64	5320	3.23	0.46	3.69	11.00

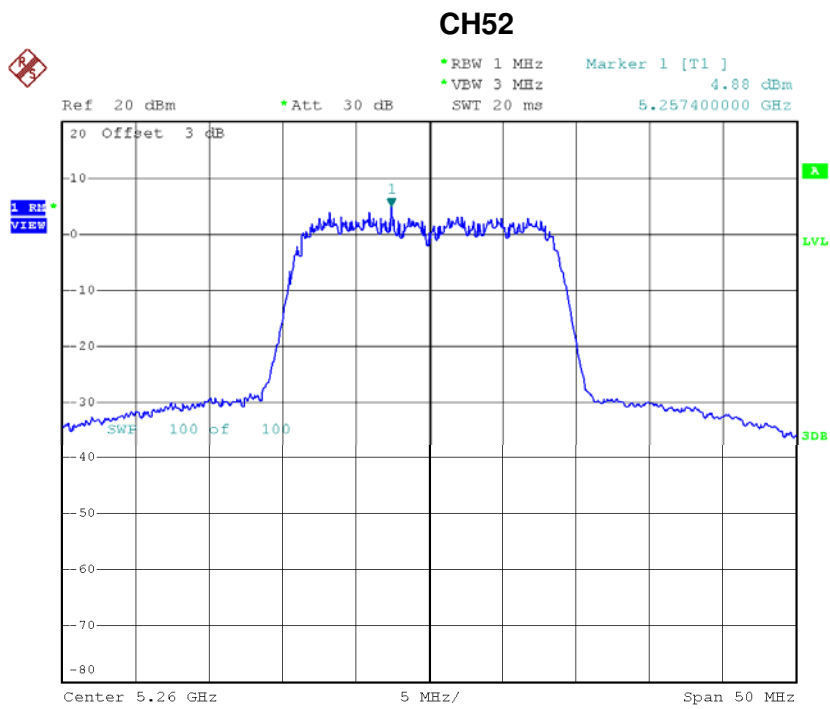


Date: 11.APR.2016 18:08:00

CH60

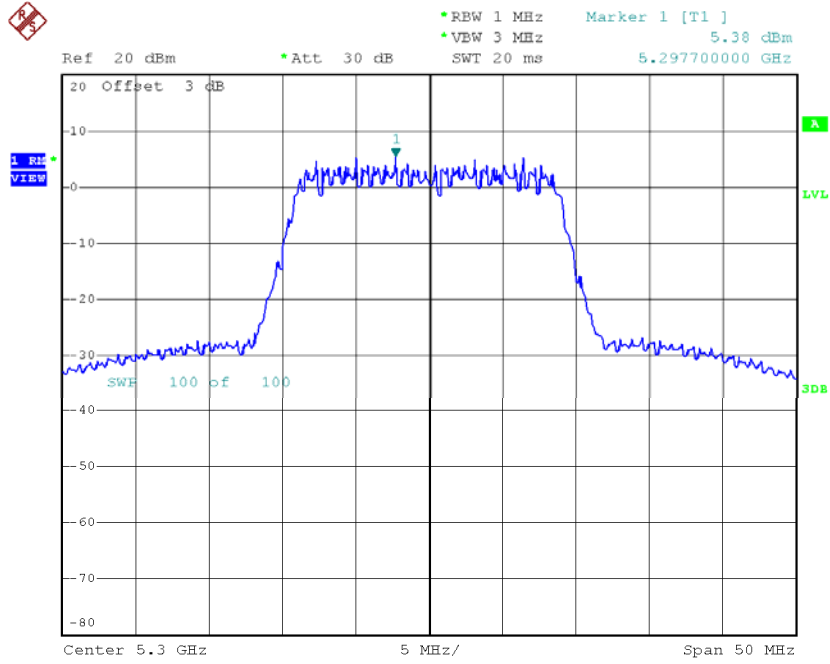

Date: 11.APR.2016 18:09:23


CH64

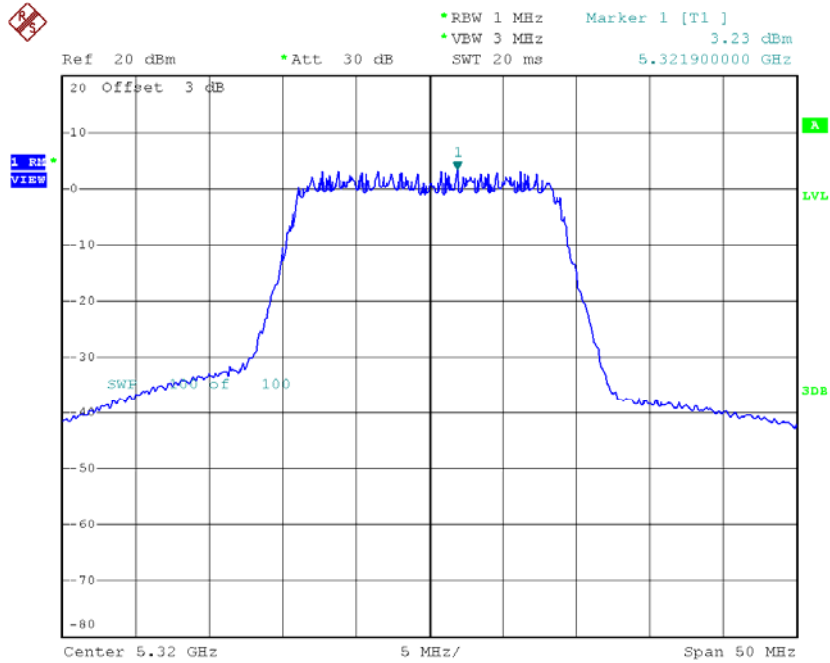

Date: 11.APR.2016 18:12:12


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.76	0.46	6.22	11.00
CH60	5300	4.77	0.46	5.23	11.00
CH64	5320	2.49	0.46	2.95	11.00

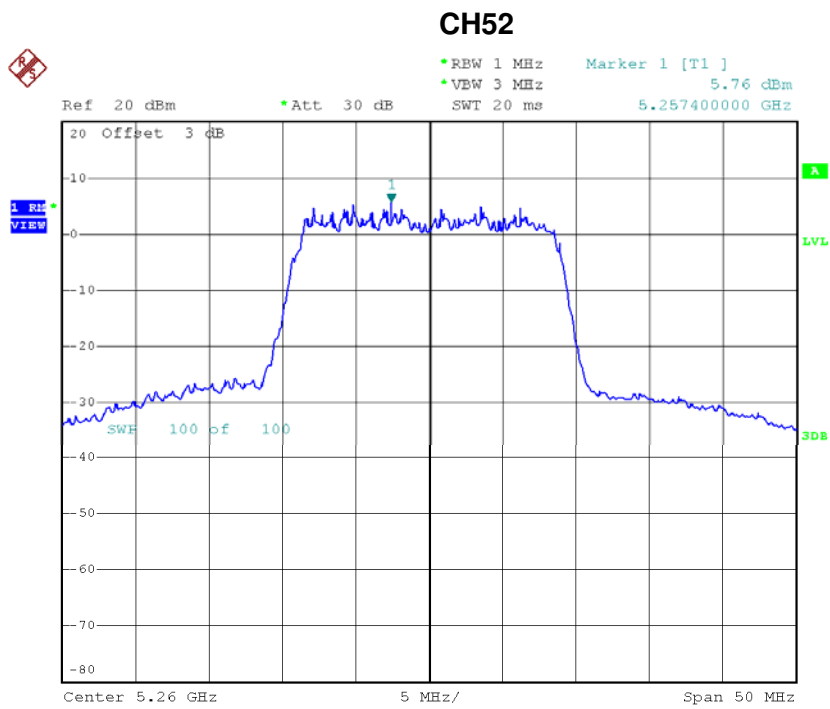


Date: 6.APR.2016 19:30:22

CH60

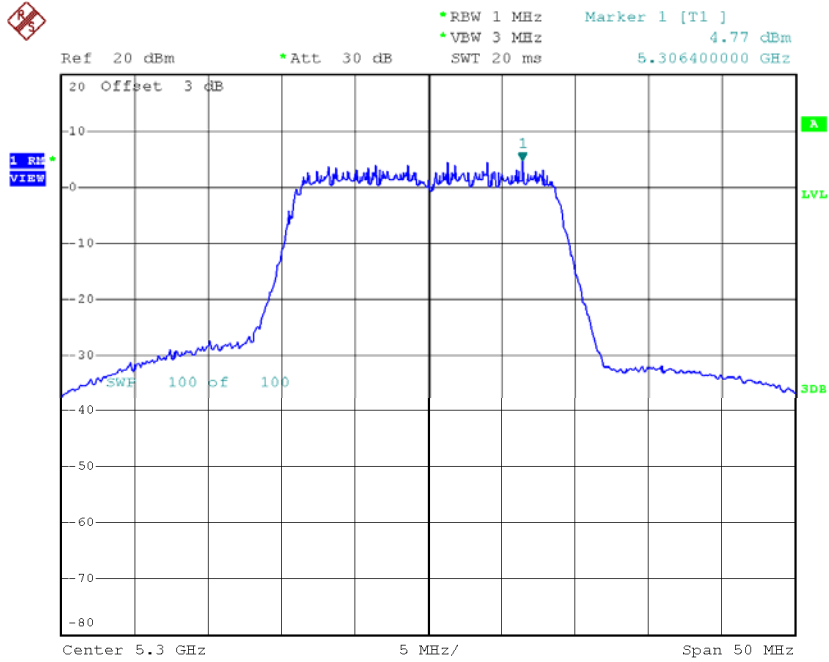

Date: 6.APR.2016 19:37:47

CH64

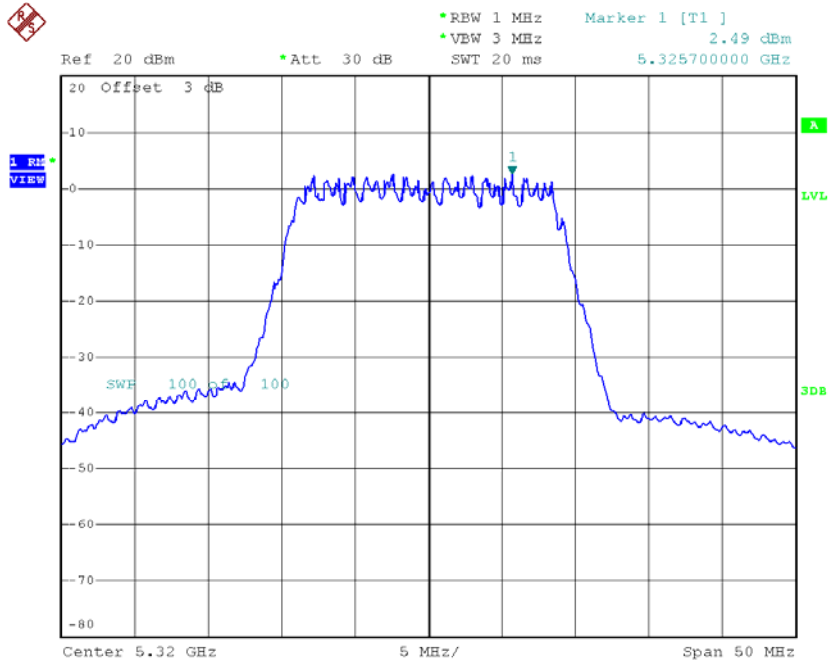

Date: 6.APR.2016 19:40:13


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	8.81	0.46	8.81	11.00
CH60	5300	8.56	0.46	8.56	11.00
CH64	5320	6.35	0.46	6.35	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	1.73	1.25	2.98	11.00
CH62	5310	-0.49	1.25	0.76	11.00

CH54

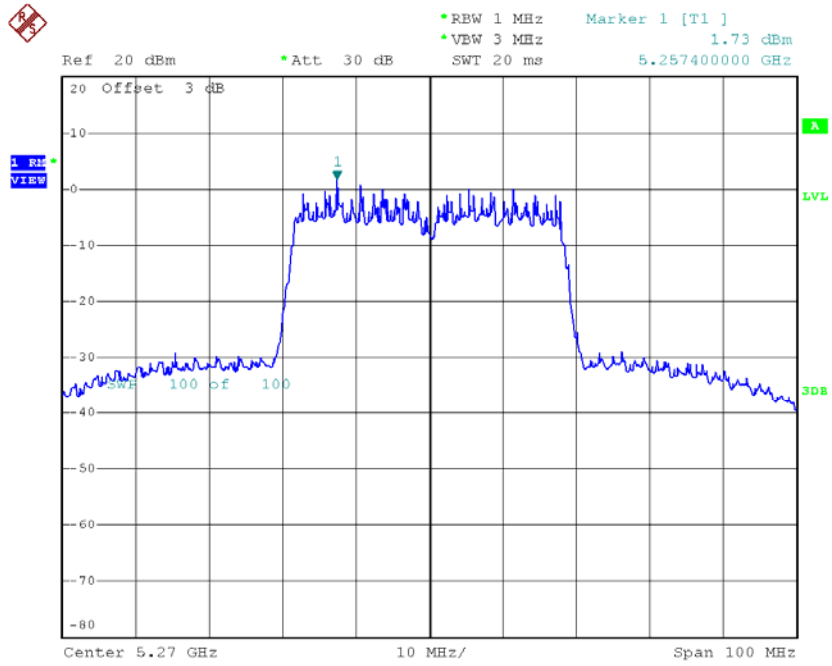

Date: 11.APR.2016 20:35:09

CH62

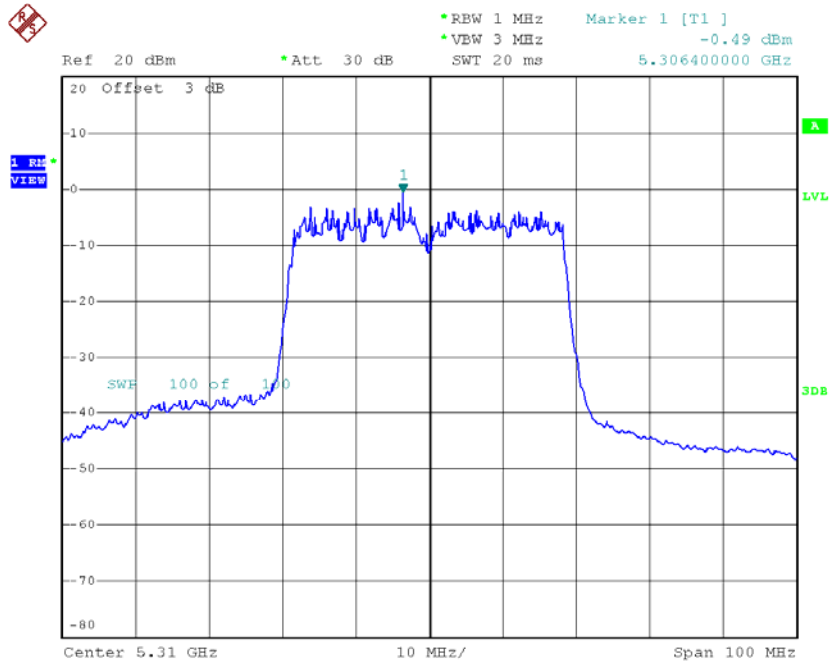

Date: 11.APR.2016 20:36:31

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	1.87	1.25	3.12	11.00
CH62	5310	-1.74	1.25	-0.49	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	6.06	1.25	6.06	11.00
CH62	5310	3.19	1.25	3.19	11.00


Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	4.92	0.25	5.17	11.00
CH116	5580	5.62	0.25	5.87	11.00
CH140	5700	4.40	0.25	4.65	11.00

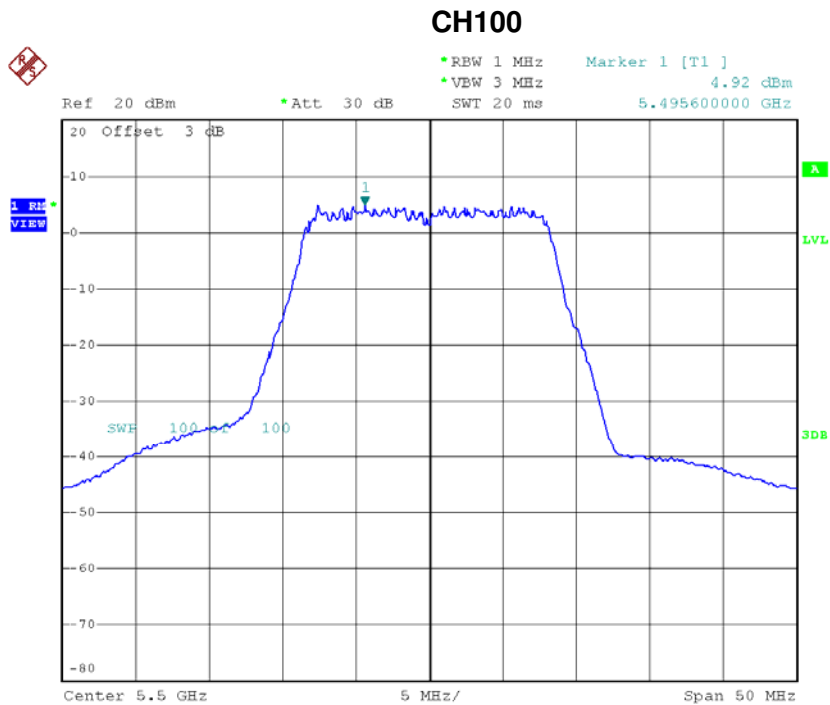


Date: 11.APR.2016 18:01:40

CH116

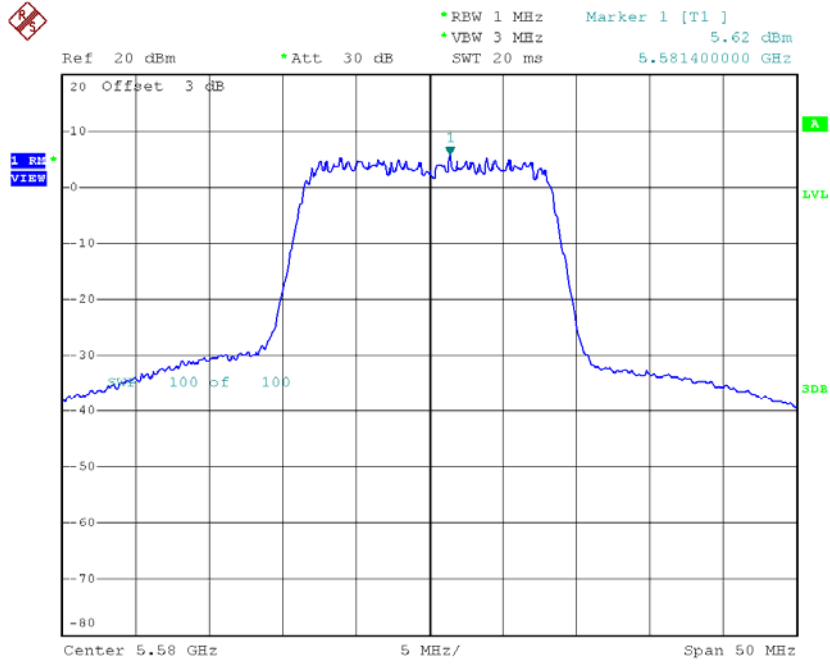


Date: 11.APR.2016 18:02:05

CH140

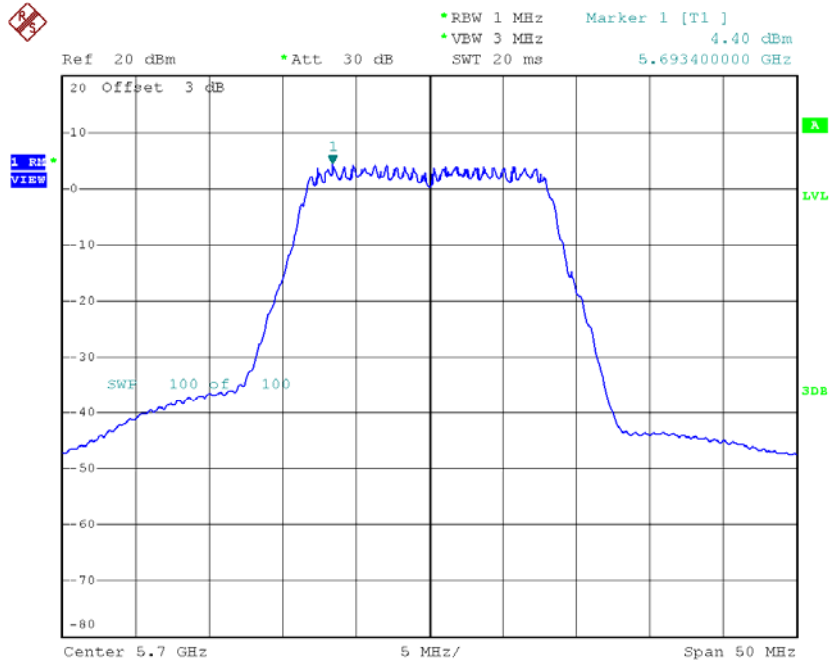


Date: 11.APR.2016 18:02:31

CH116

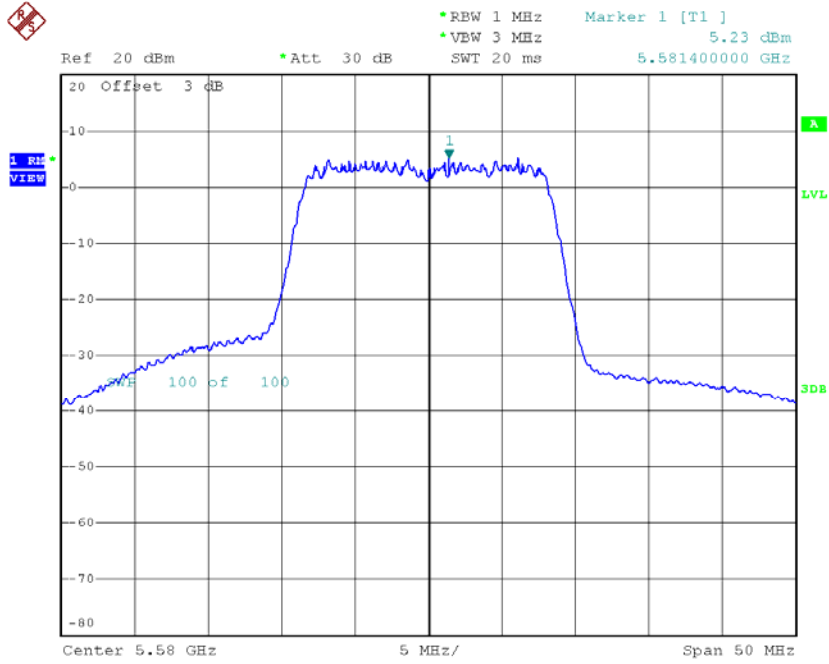

Date: 6.APR.2016 18:23:05

CH140

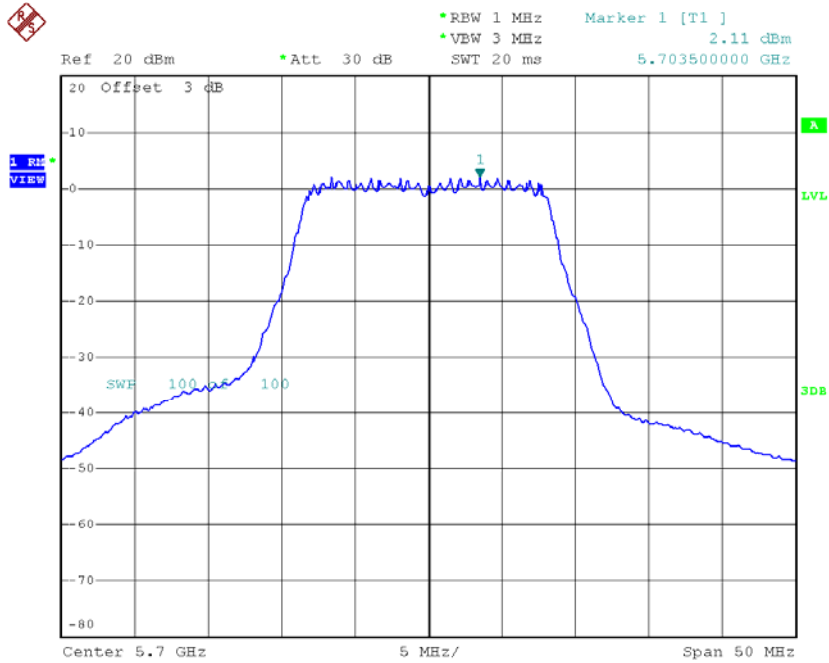


Date: 6.APR.2016 18:24:23

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	8.88	0.25	8.88	11.00
CH116	5580	8.69	0.25	8.69	11.00
CH140	5700	6.66	0.25	6.66	11.00


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	3.28	0.46	3.74	11.00
CH116	5580	5.44	0.46	5.90	11.00
CH140	5700	4.18	0.46	4.64	11.00

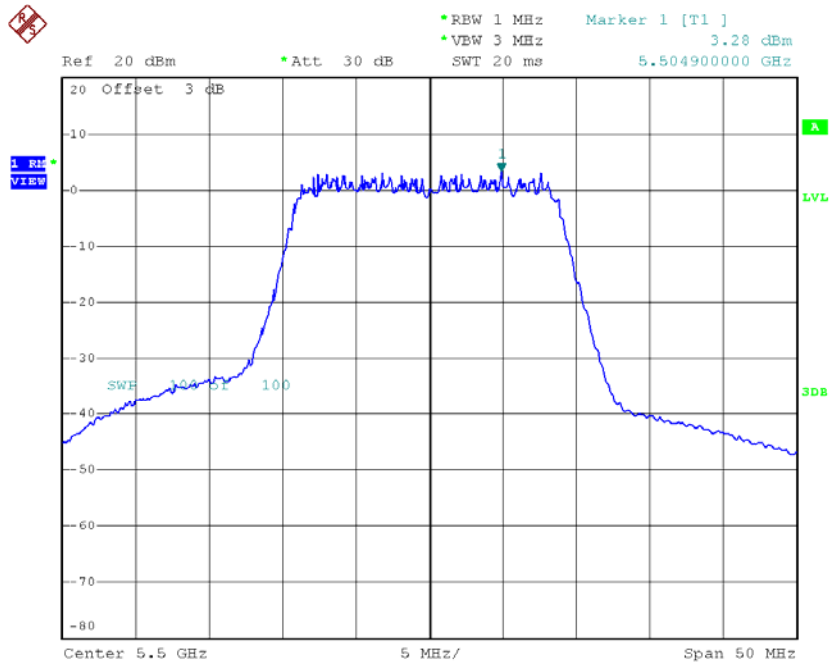CH100


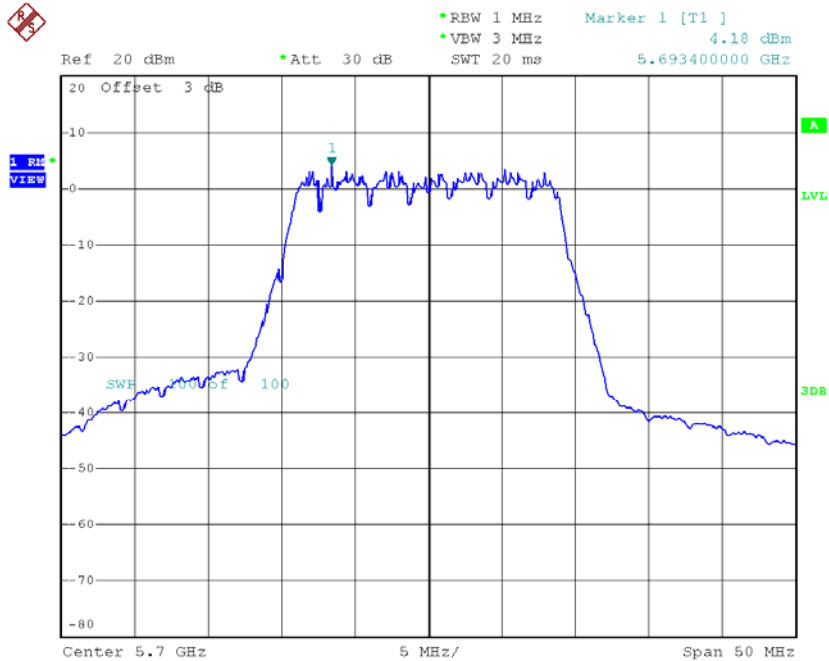
Date: 11.APR.2016 18:13:15

CH116

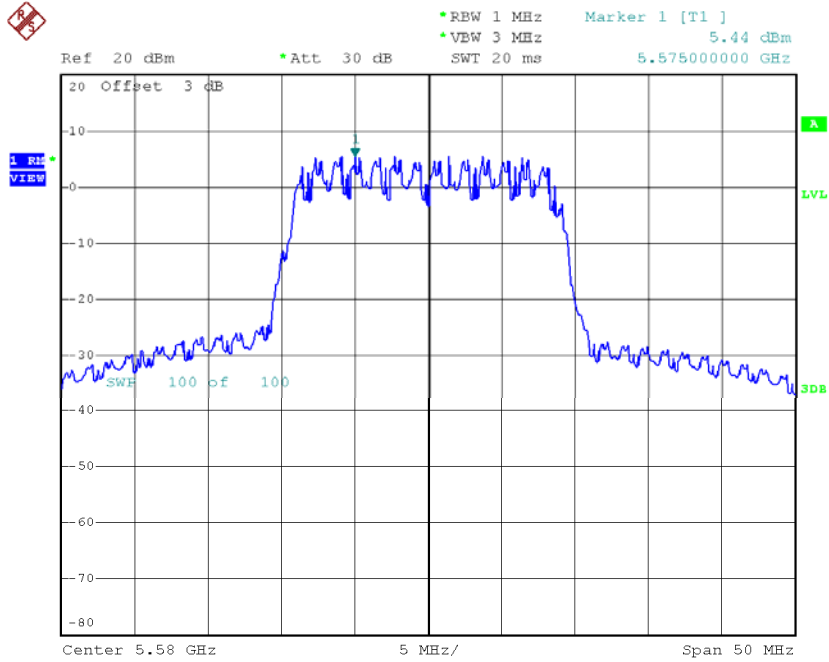

Date: 11.APR.2016 18:22:08

CH140




Date: 11.APR.2016 18:15:25

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	4.85	0.46	5.31	11.00
CH116	5580	5.65	0.46	6.11	11.00
CH140	5700	1.94	0.46	2.40	11.00

CH100

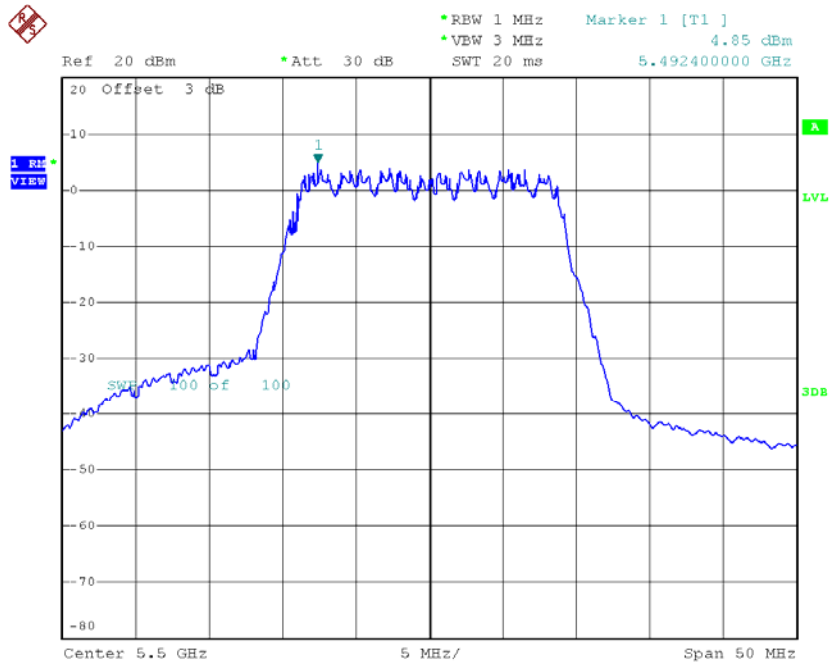


Date: 6.APR.2016 19:41:44

CH116

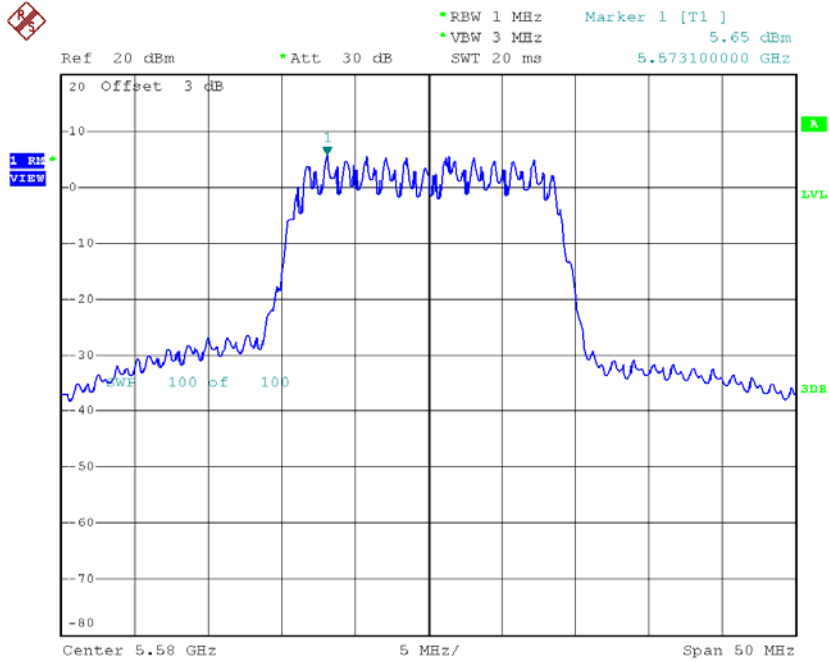

Date: 6.APR.2016 19:44:00

CH140

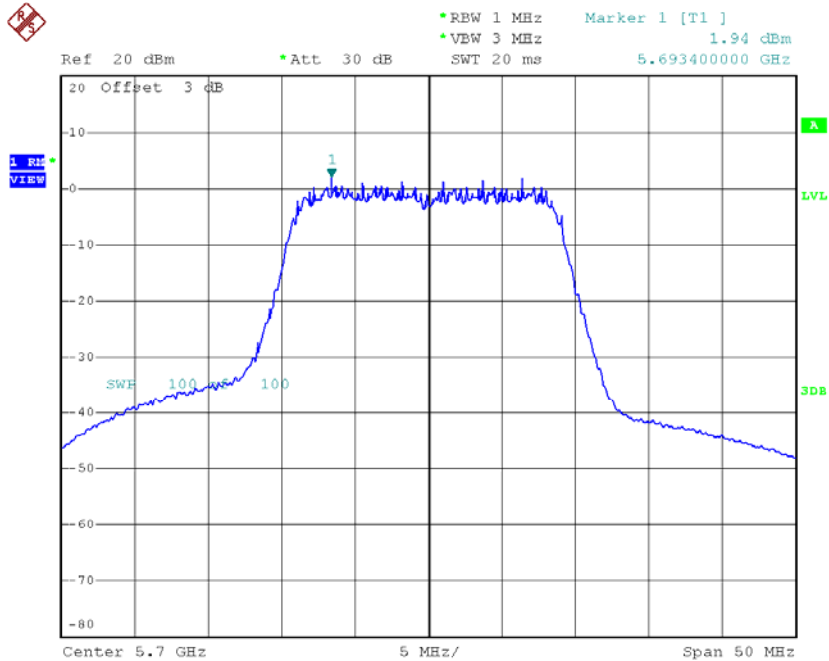

Date: 6.APR.2016 19:46:25


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	7.61	0.46	7.61	11.00
CH116	5580	9.02	0.46	9.02	11.00
CH140	5700	6.67	0.46	6.67	11.00

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-2.73	1.25	-1.48	11.00
CH110	5550	1.27	1.25	2.52	11.00
CH134	5670	-0.64	1.25	0.61	11.00

CH102

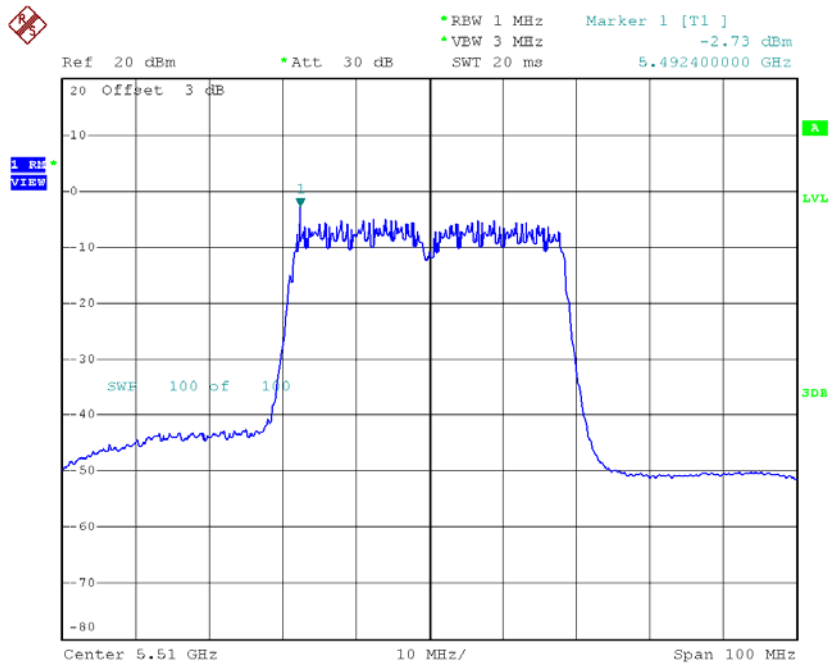


Date: 11.APR.2016 20:38:00

CH110

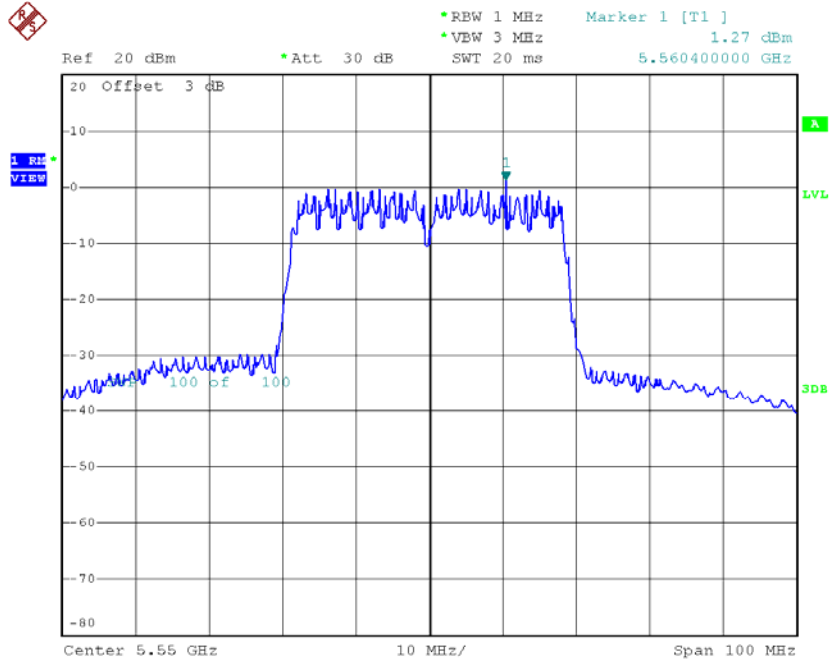

Date: 11.APR.2016 20:38:58

CH134

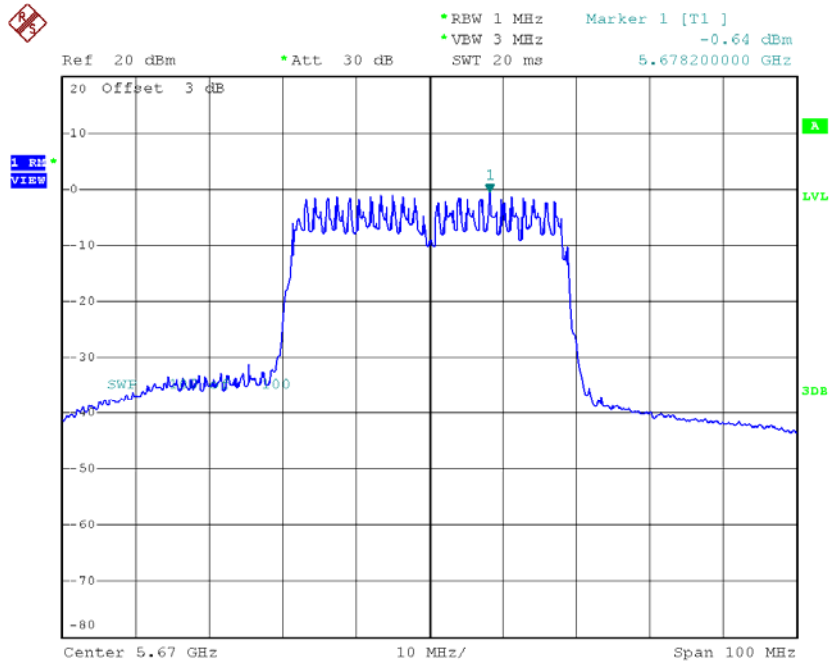


Date: 11.APR.2016 20:40:02

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-2.57	1.25	-1.32	11.00
CH110	5550	1.59	1.25	2.84	11.00
CH134	5670	-3.60	1.25	-2.35	11.00

CH102

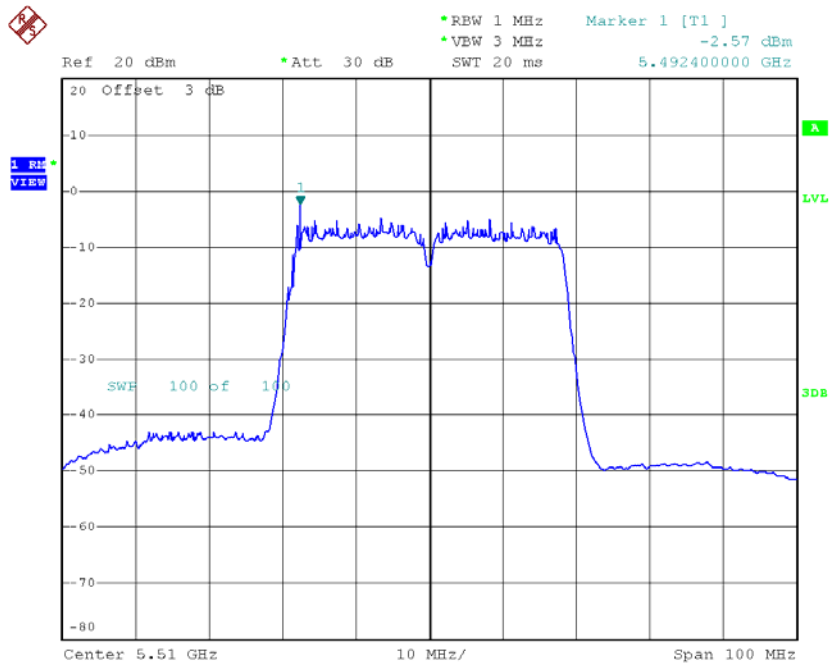

Date: 6.APR.2016 20:42:31


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	1.61	1.25	1.61	11.00
CH110	5550	5.69	1.25	5.69	11.00
CH134	5670	2.39	1.25	2.39	11.00


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	1.64	0.25	1.89	30.00
CH157	5785	5.45	0.25	5.70	30.00
CH165	5825	2.73	0.25	2.98	30.00


TX CH149

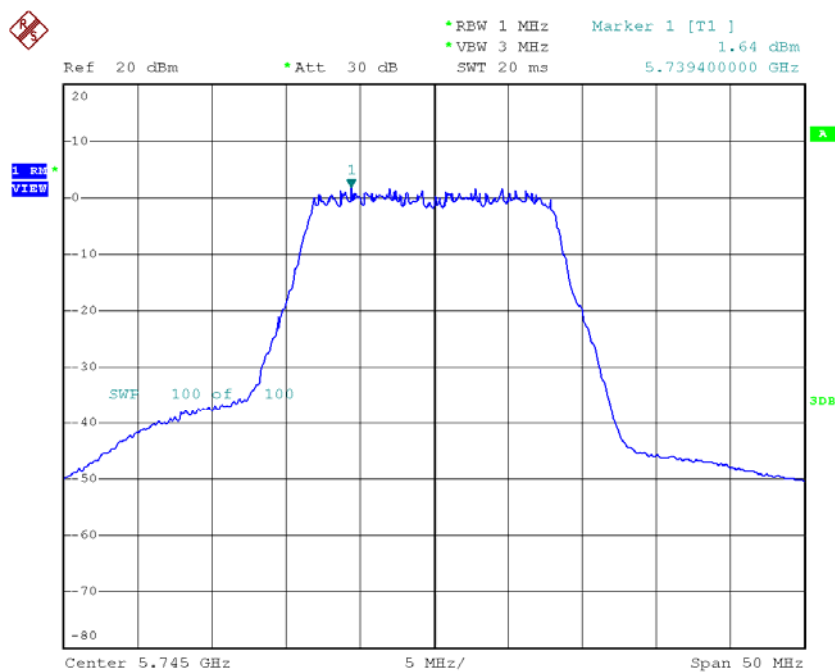

Date: 11.APR.2016 18:02:55

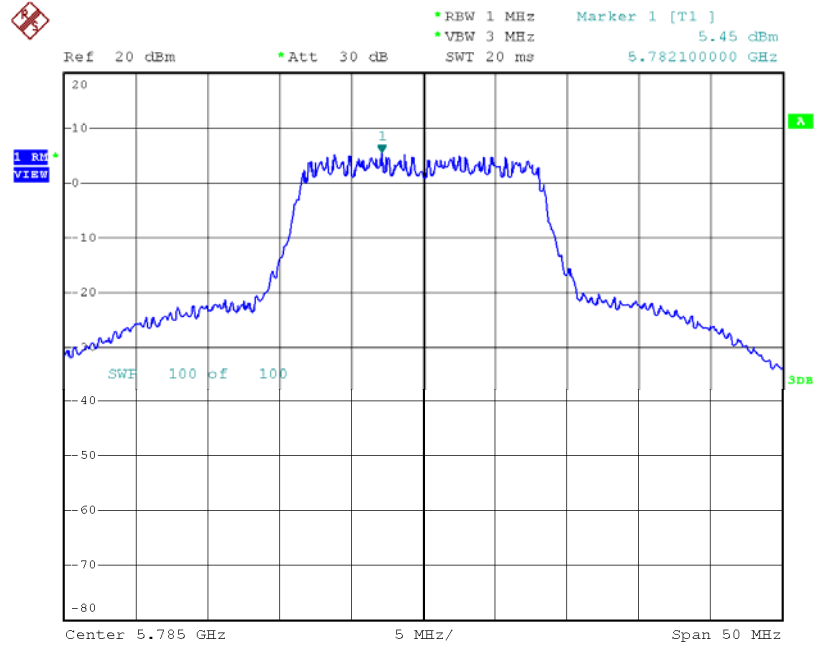TX CH157

Date: 11.APR.2016 18:03:23

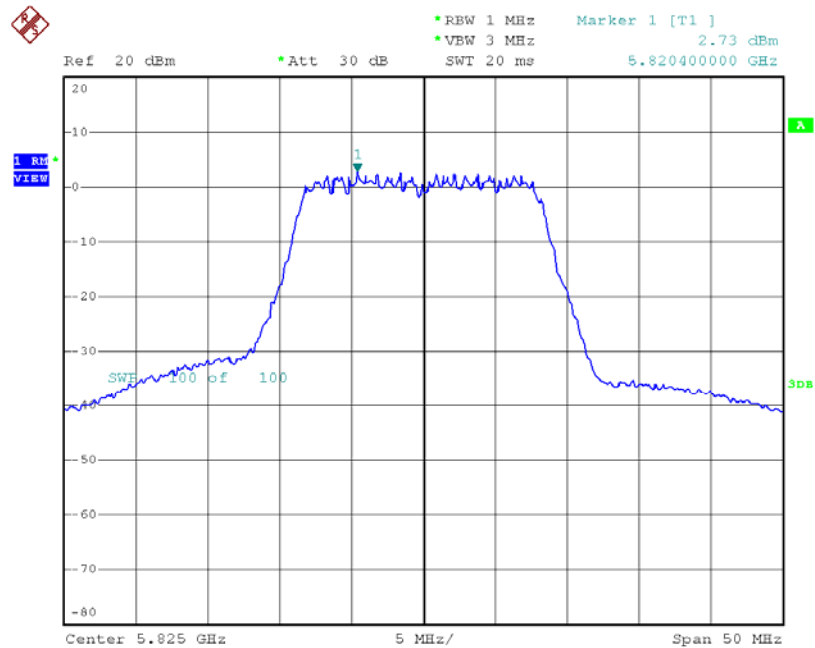
TX CH165

Date: 11.APR.2016 18:03:48

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.66	0.25	0.91	30.00
CH157	5785	4.79	0.25	5.04	30.00
CH165	5825	2.89	0.25	3.14	30.00

TX CH149

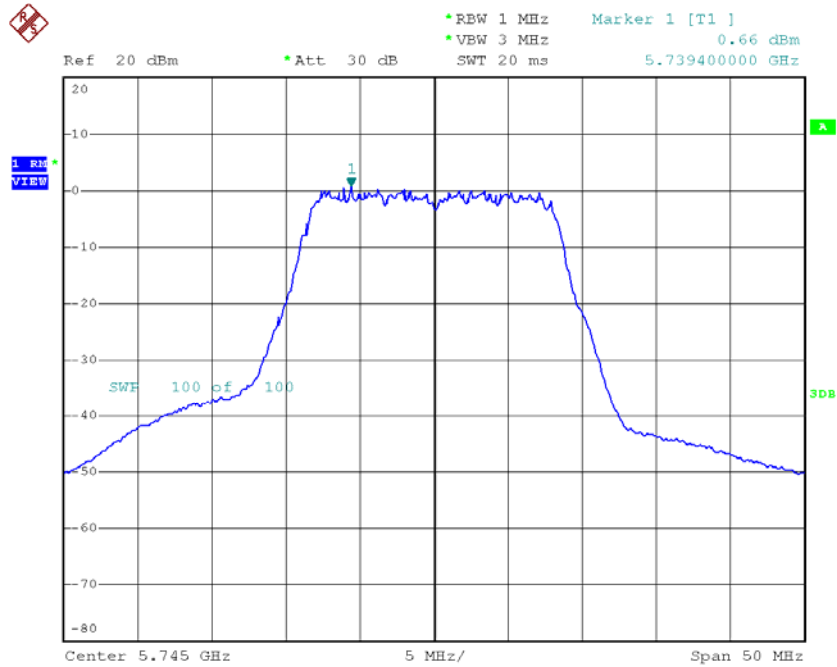


Date: 6.APR.2016 18:25:01

TX CH157

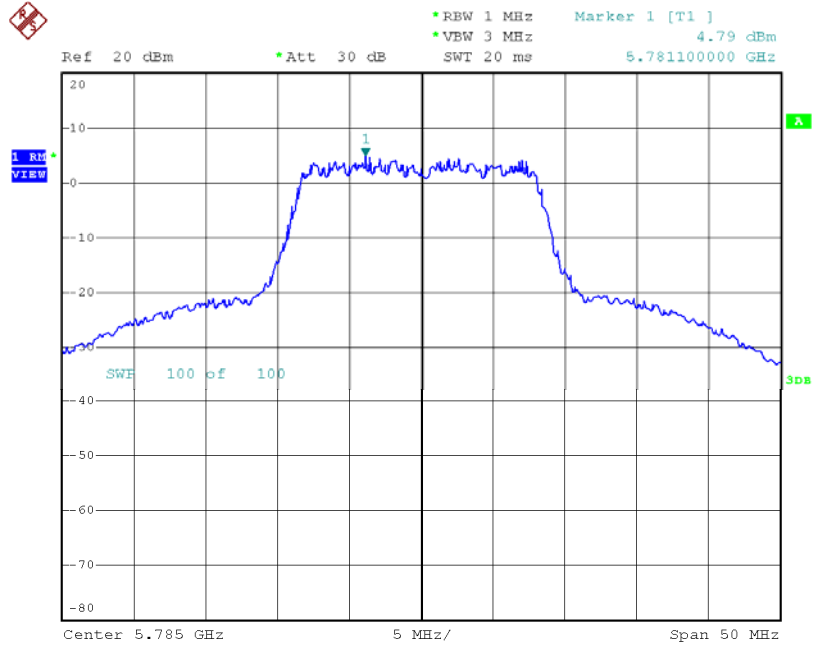

Date: 6.APR.2016 18:26:58

TX CH165

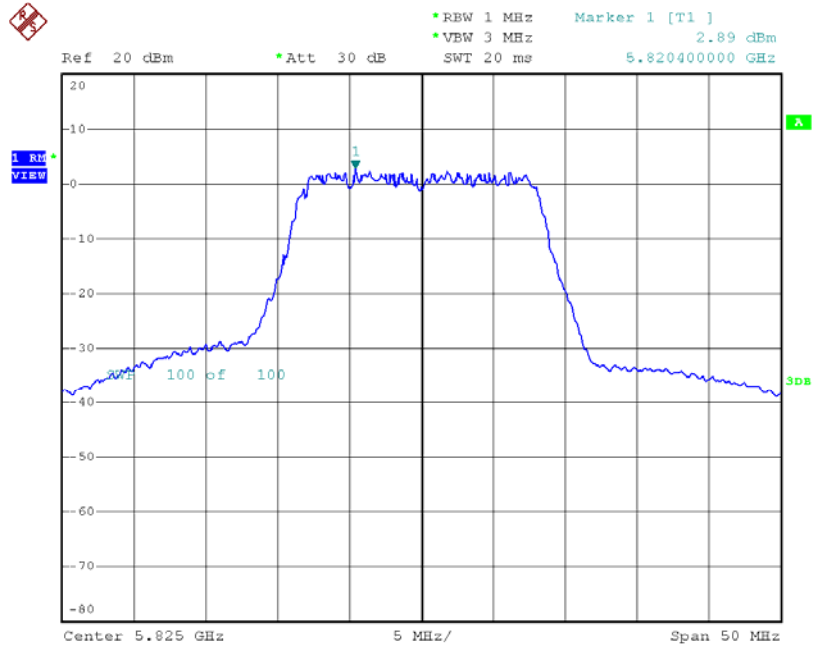

Date: 6.APR.2016 18:28:03


Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.44	0.25	4.44	30.00
CH157	5785	8.39	0.25	8.39	30.00
CH165	5825	6.07	0.25	6.07	30.00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	1.58	0.46	2.04	30.00
CH157	5785	4.63	0.46	5.09	30.00
CH165	5825	1.55	0.46	2.01	30.00

TX CH149

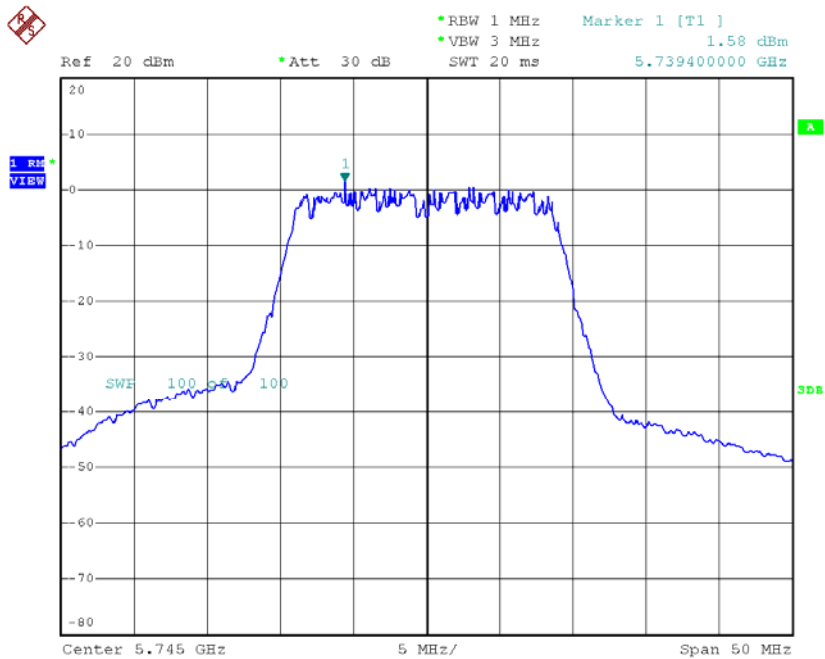


Date: 11.APR.2016 18:16:38

TX CH157

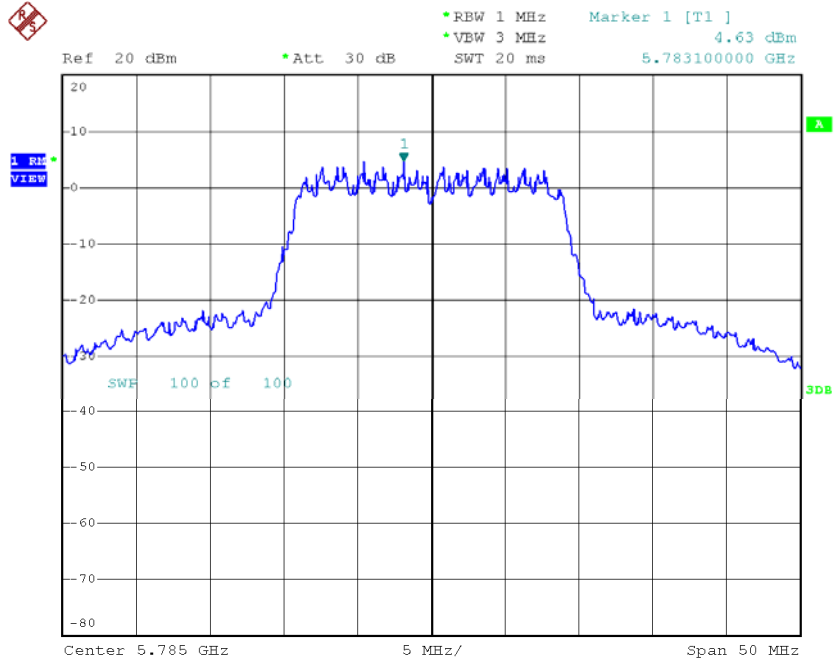

Date: 11.APR.2016 18:17:56

TX CH165

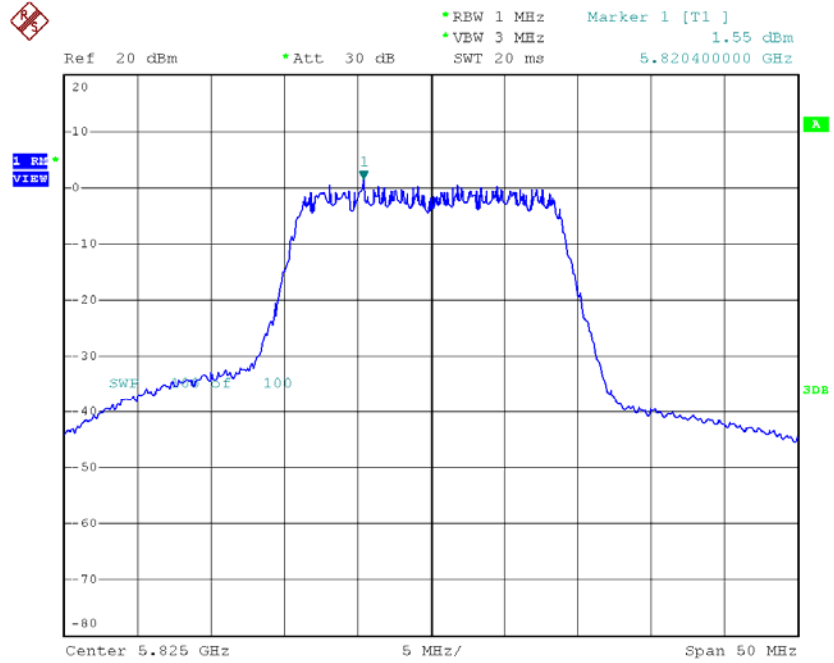


Date: 11.APR.2016 18:23:03

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.22	0.46	0.68	30.00
CH157	5785	3.51	0.46	3.97	30.00
CH165	5825	2.02	0.46	2.48	30.00

TX CH149

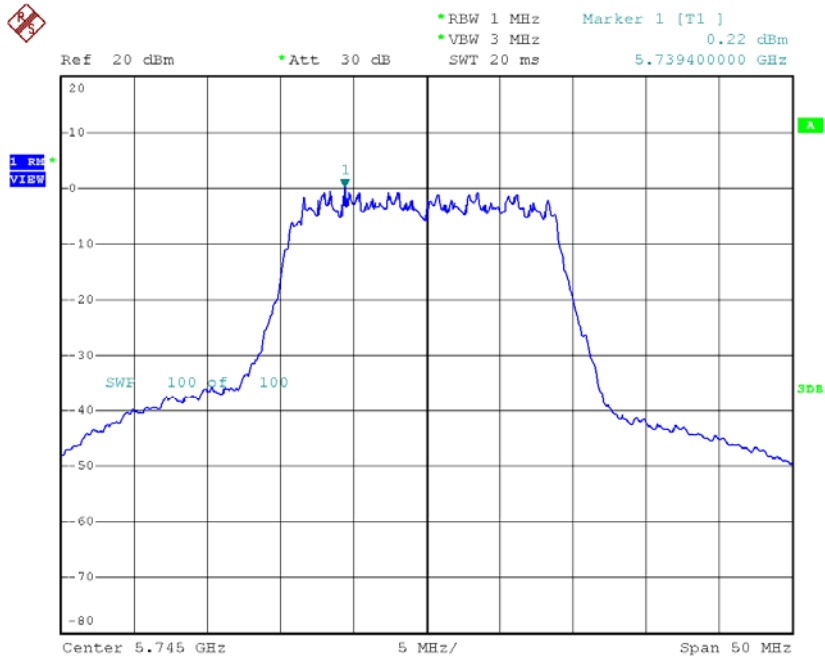


Date: 6.APR.2016 19:48:56

TX CH157

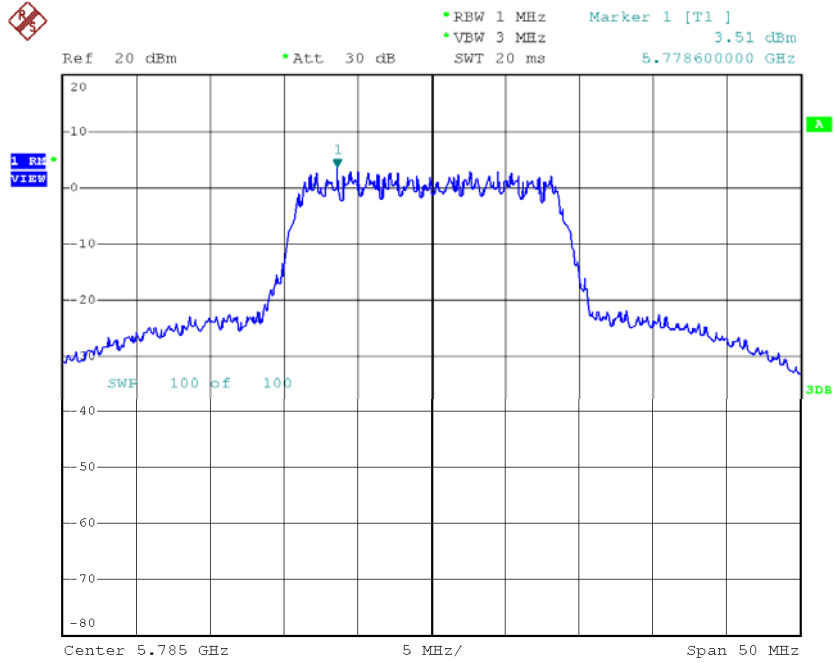

Date: 6.APR.2016 19:51:36

TX CH165

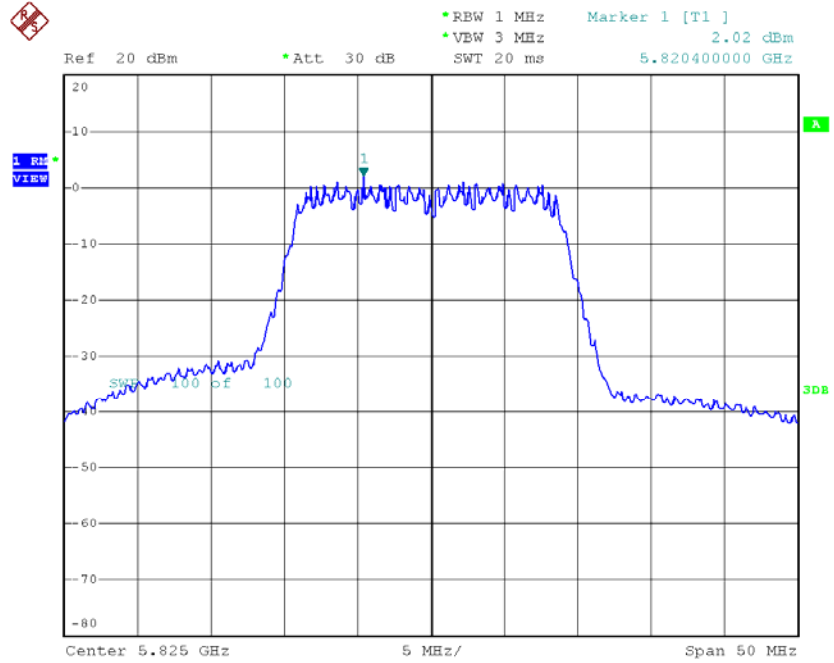

Date: 6.APR.2016 19:53:14


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.42	0.46	4.42	30.00
CH157	5785	7.58	0.46	7.58	30.00
CH165	5825	5.26	0.46	5.26	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-5.59	1.25	-4.34	30.00
CH159	5795	-1.55	1.25	-0.30	30.00

TX CH151

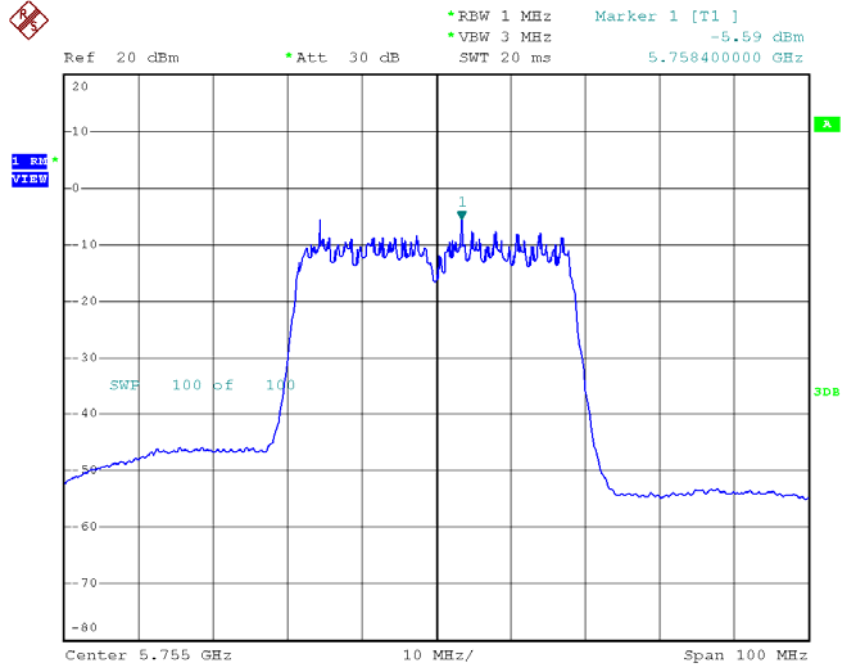

Date: 11.APR.2016 20:42:11

TX CH159

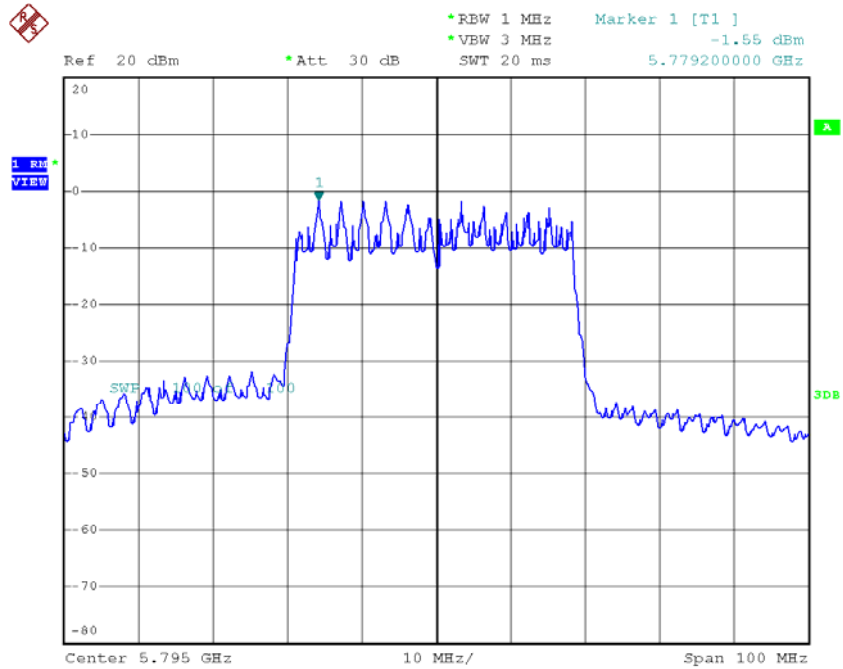


Date: 11.APR.2016 20:43:08

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-6.83	1.25	-5.58	30.00
CH159	5795	-3.95	1.25	-2.70	30.00

TX CH151

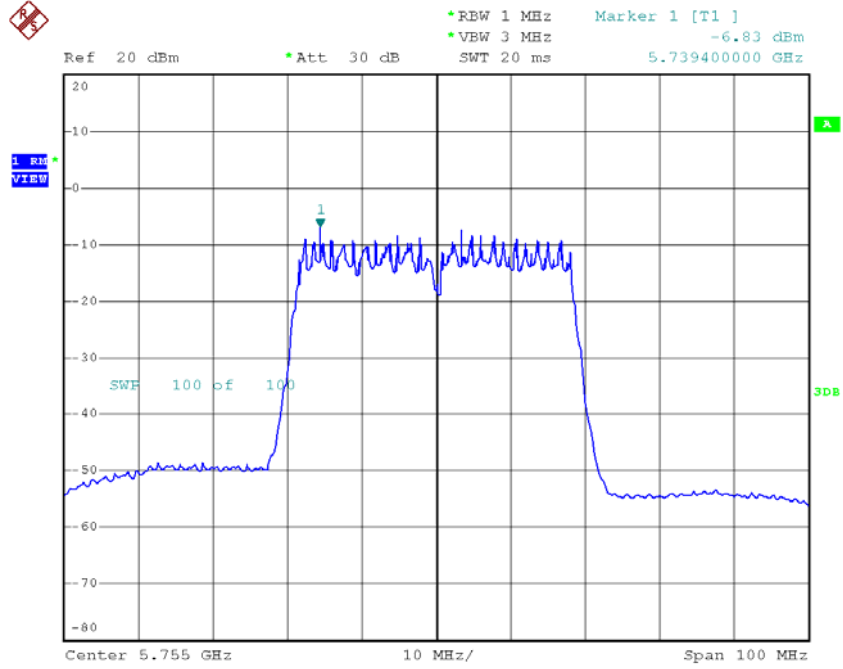

Date: 6.APR.2016 20:48:34

TX CH159

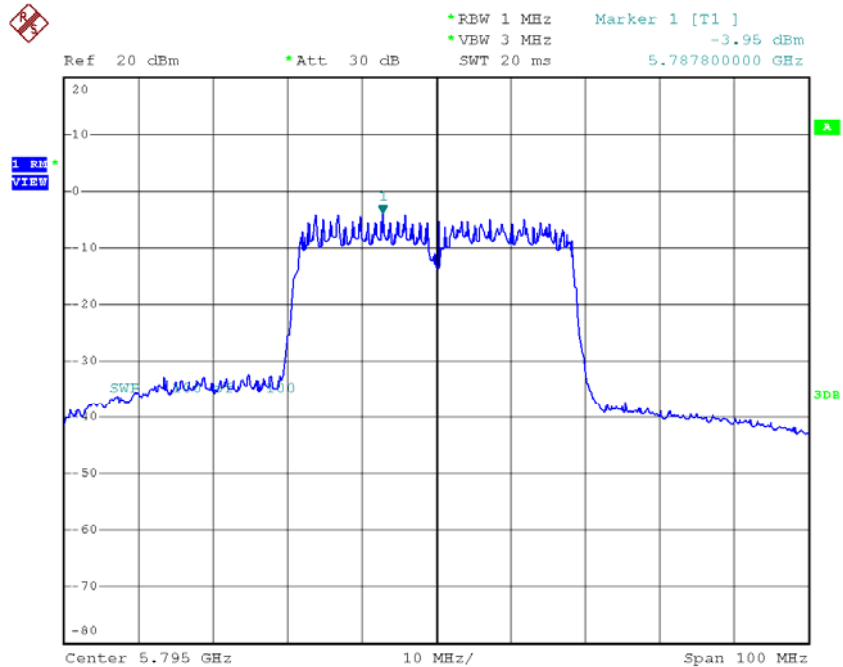


Date: 6.APR.2016 20:49:42

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-1.91	1.25	-1.91	30.00
CH159	5795	1.67	1.25	1.67	30.00

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	3.74	0.22	3.96	11.00
CH40	5200	6.47	0.22	6.69	11.00
CH48	5240	6.64	0.22	6.86	11.00

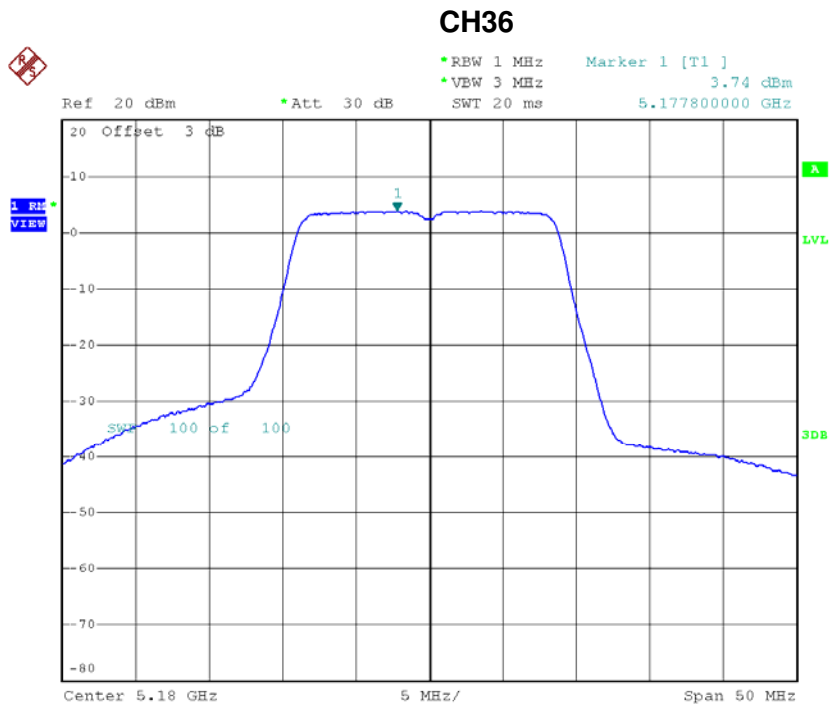

Date: 11.APR.2016 18:24:11

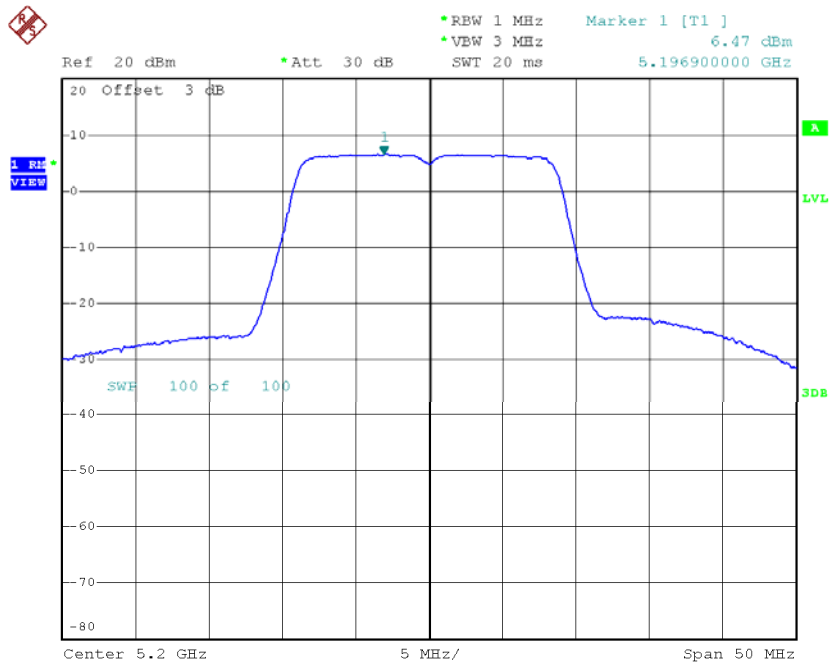CH40


Date: 11.APR.2016 18:25:17

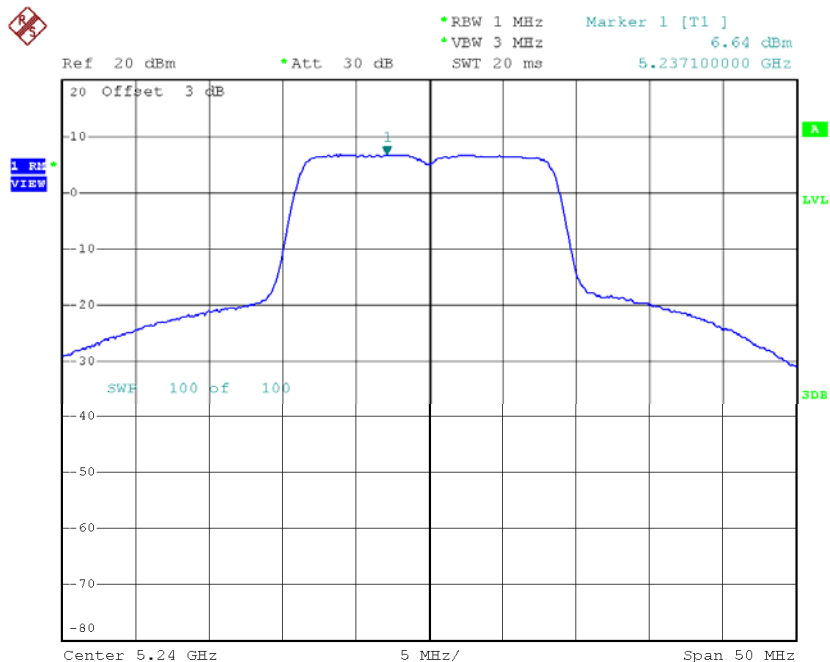CH48

Date: 11.APR.2016 18:26:16


Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	6.24	0.22	6.46	11.00
CH40	5200	7.14	0.22	7.36	11.00
CH48	5240	7.79	0.22	8.01	11.00

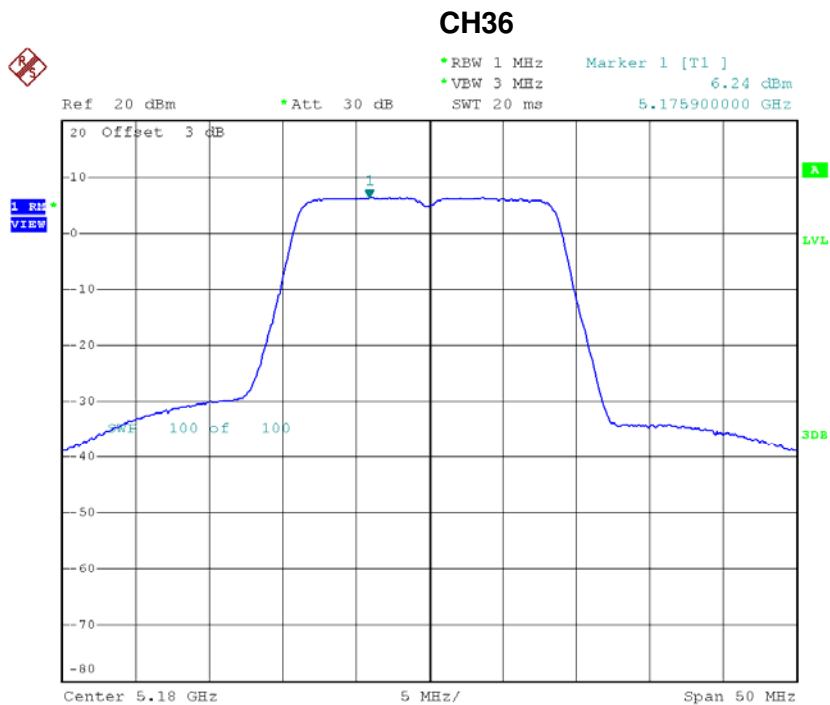


Date: 6.APR.2016 19:56:08

CH40

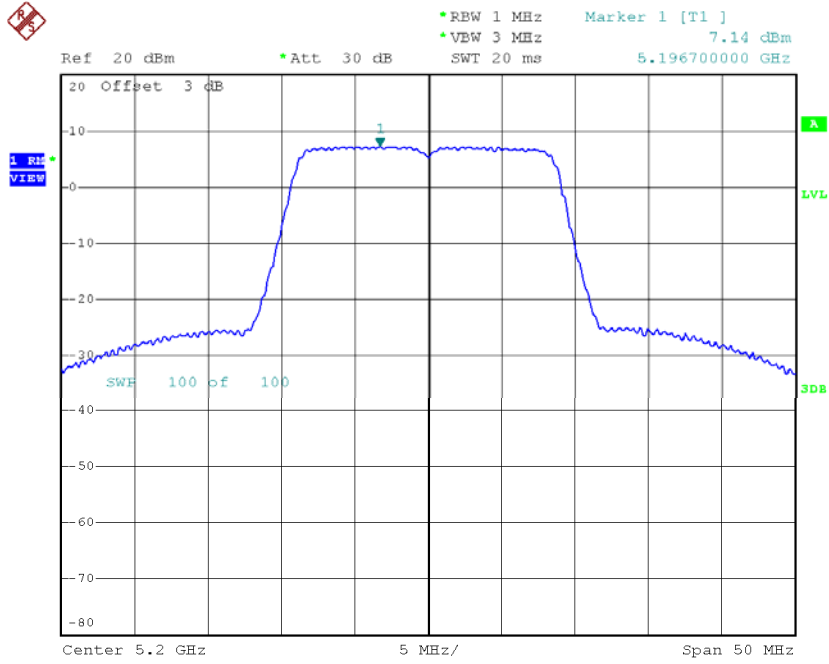

Date: 6.APR.2016 20:01:56

CH48

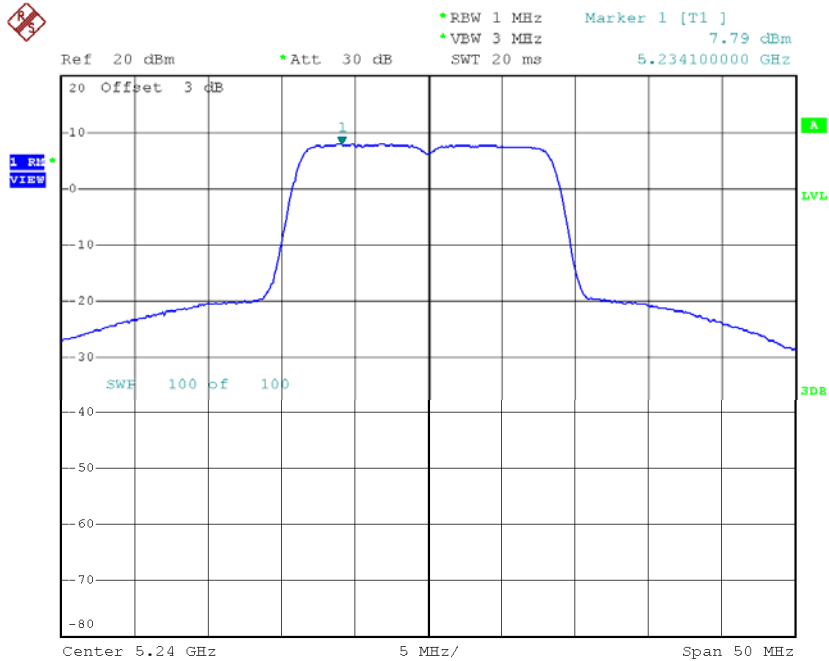


Date: 6.APR.2016 20:13:10

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	8.40	0.22	8.40	11.00
CH40	5200	10.05	0.22	10.05	11.00
CH48	5240	10.48	0.22	10.48	11.00

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-3.10	0.73	-2.37	11.00
CH46	5230	4.44	0.73	5.17	11.00

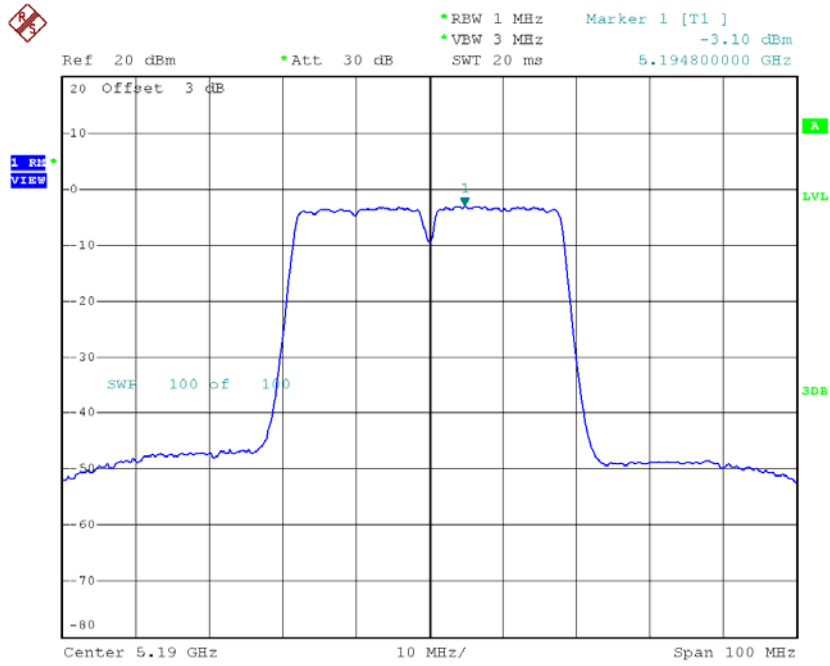CH38

Date: 11.APR.2016 20:44:28

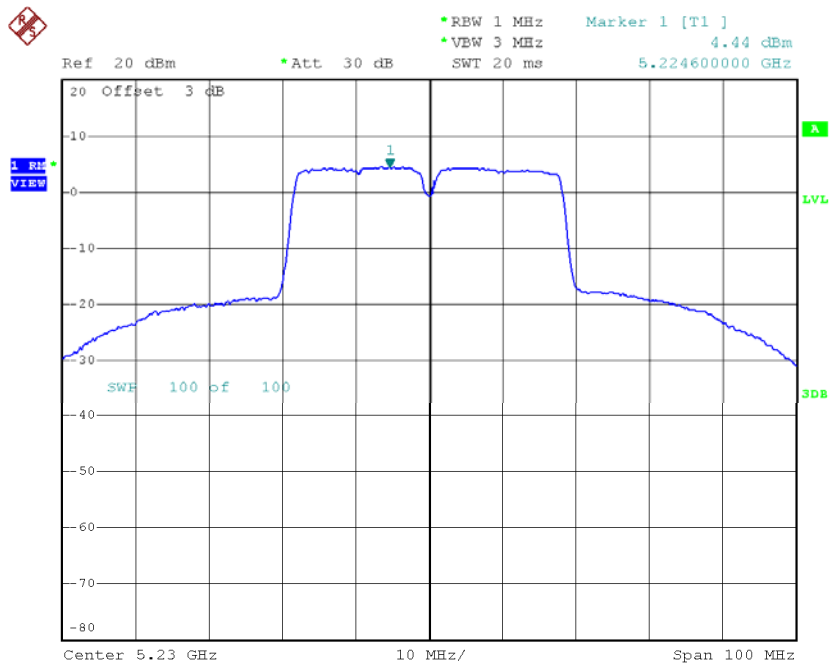
CH46

Date: 11.APR.2016 20:45:13

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	1.28	0.73	2.01	11.00
CH46	5230	3.70	0.73	4.43	11.00

CH38

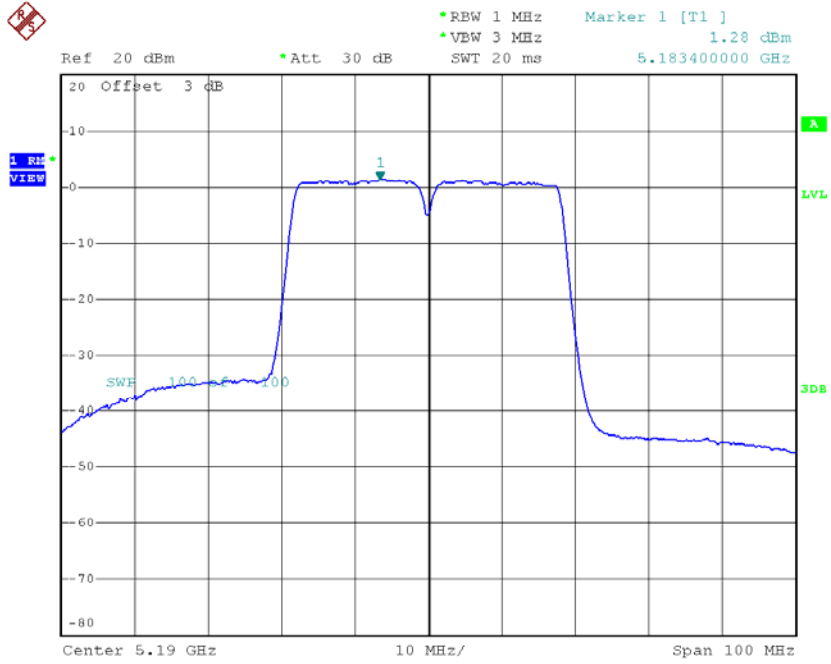

Date: 6.APR.2016 20:50:56

CH46

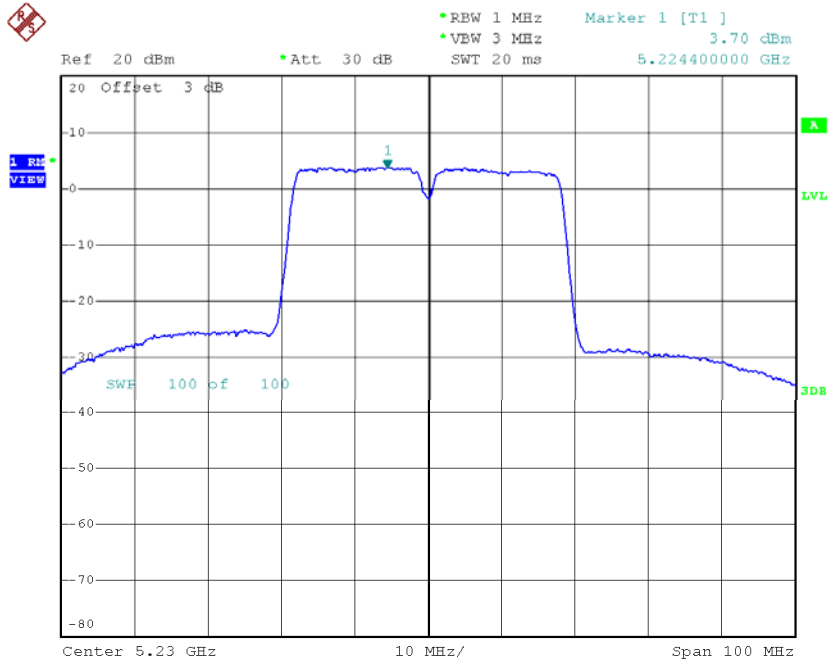

Date: 6.APR.2016 20:53:18

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	3.36	0.73	3.36	11.00
CH46	5230	7.83	0.73	7.83	11.00

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	1.60	1.46	1.60	11.00


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	5.36	0.22	5.58	11.00
CH60	5300	5.77	0.22	5.99	11.00
CH64	5320	5.04	0.22	5.26	11.00

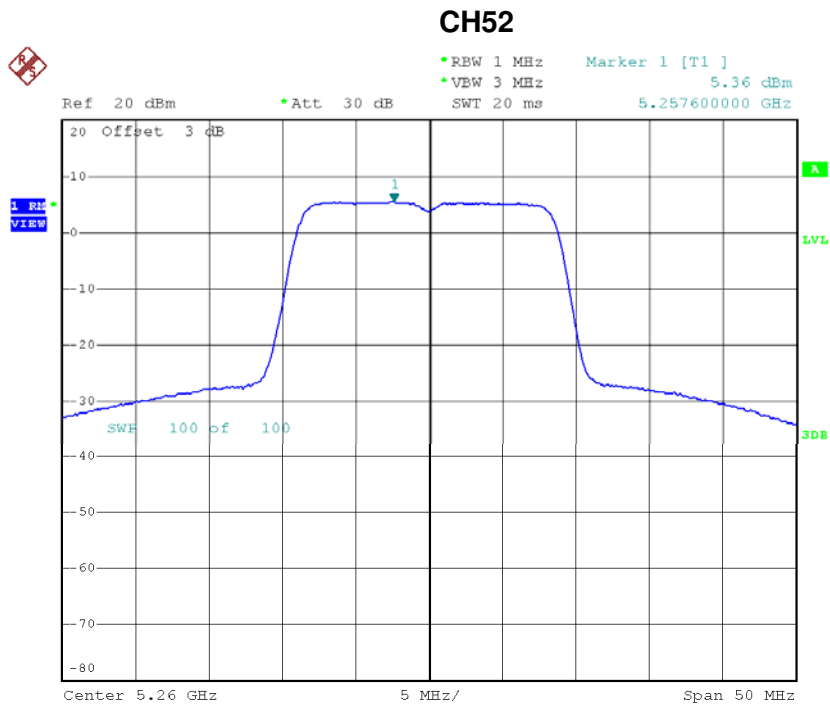


Date: 11.APR.2016 18:27:21

CH60

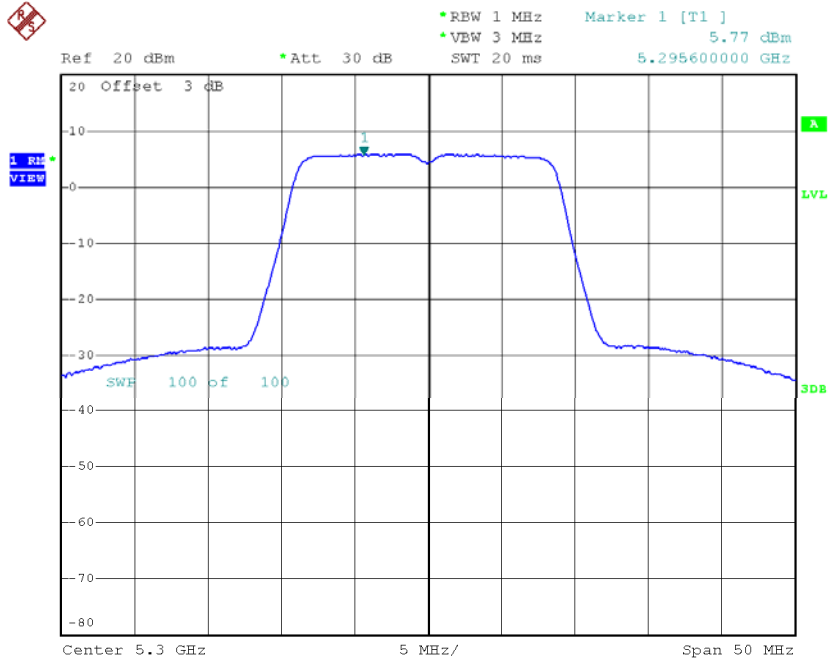

Date: 11.APR.2016 18:28:58


CH64

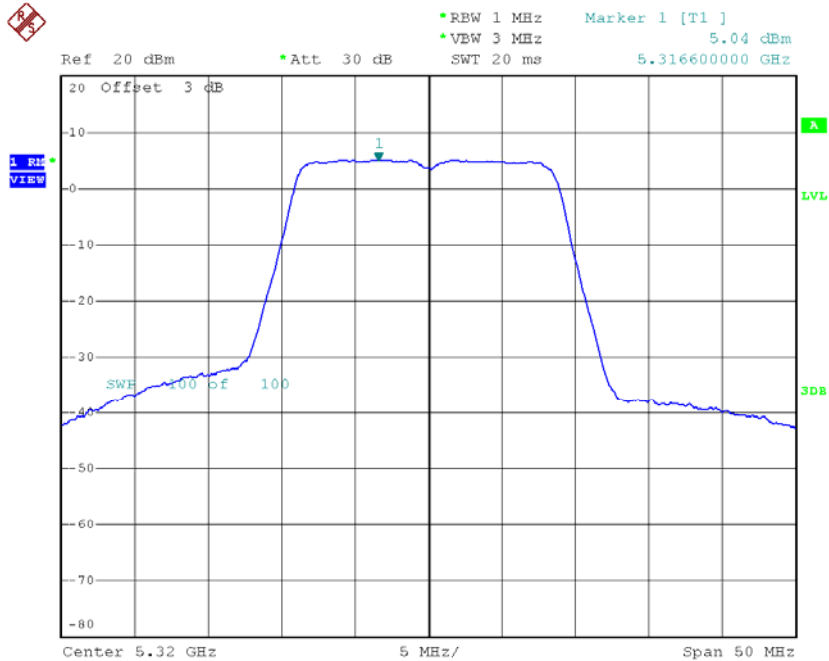

Date: 11.APR.2016 20:25:11


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	6.10	0.22	6.32	11.00
CH60	5300	5.21	0.22	5.43	11.00
CH64	5320	3.93	0.22	4.15	11.00

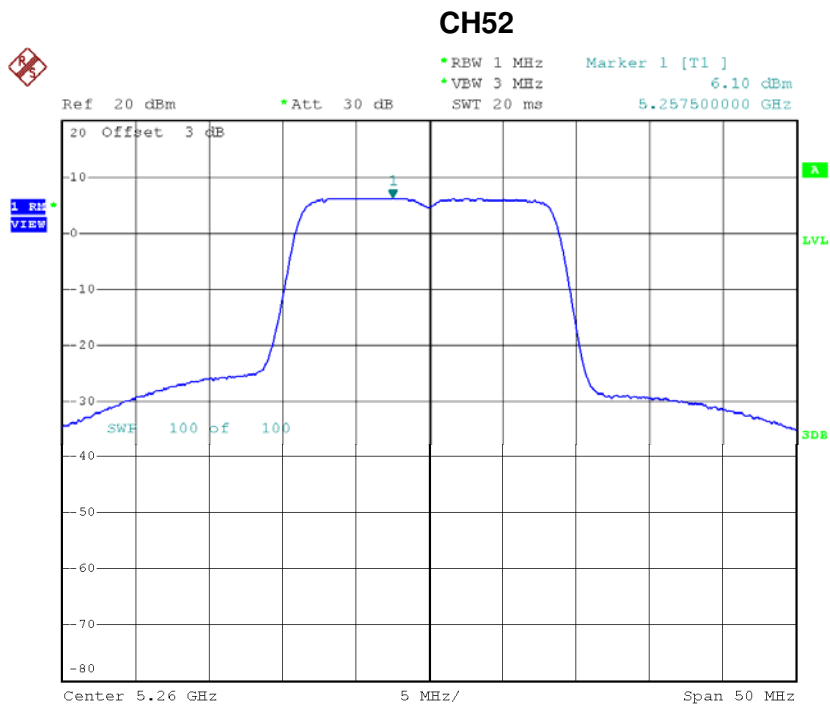


Date: 6.APR.2016 20:14:40

CH60

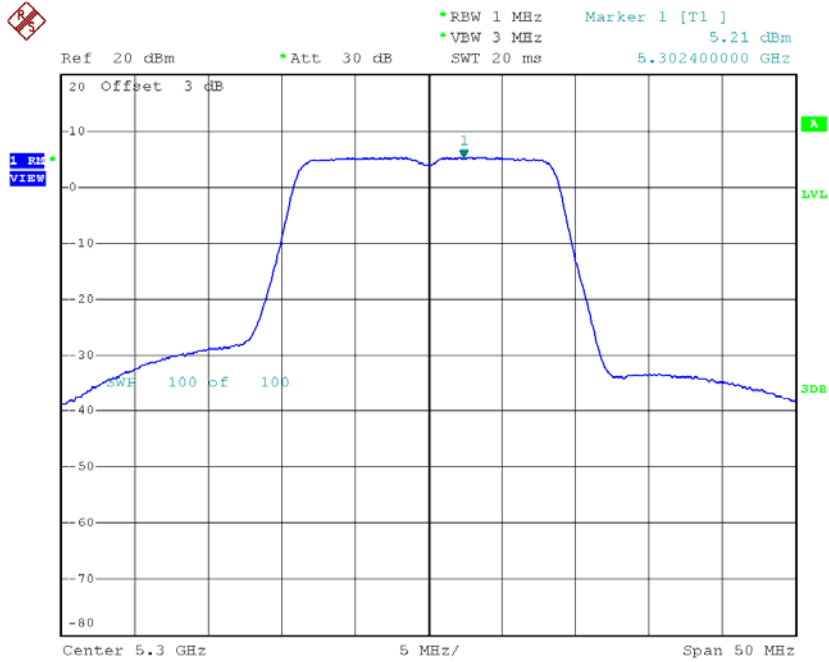

Date: 6.APR.2016 20:19:14

CH64

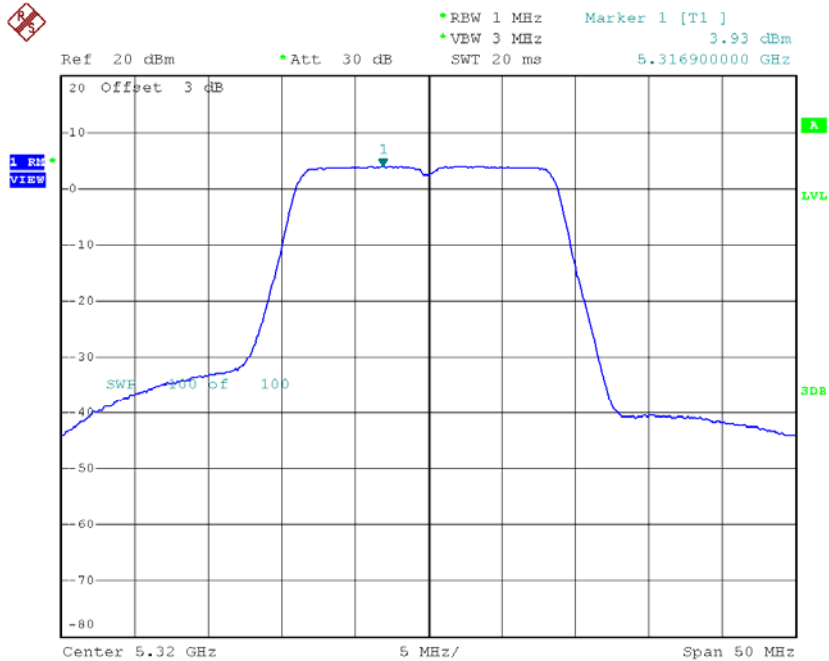

Date: 6.APR.2016 20:20:32


Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	8.98	0.22	8.98	11.00
CH60	5300	8.73	0.22	8.73	11.00
CH64	5320	7.75	0.22	7.75	11.00

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	2.35	0.73	3.08	11.00
CH62	5310	0.43	0.73	1.16	11.00

CH54

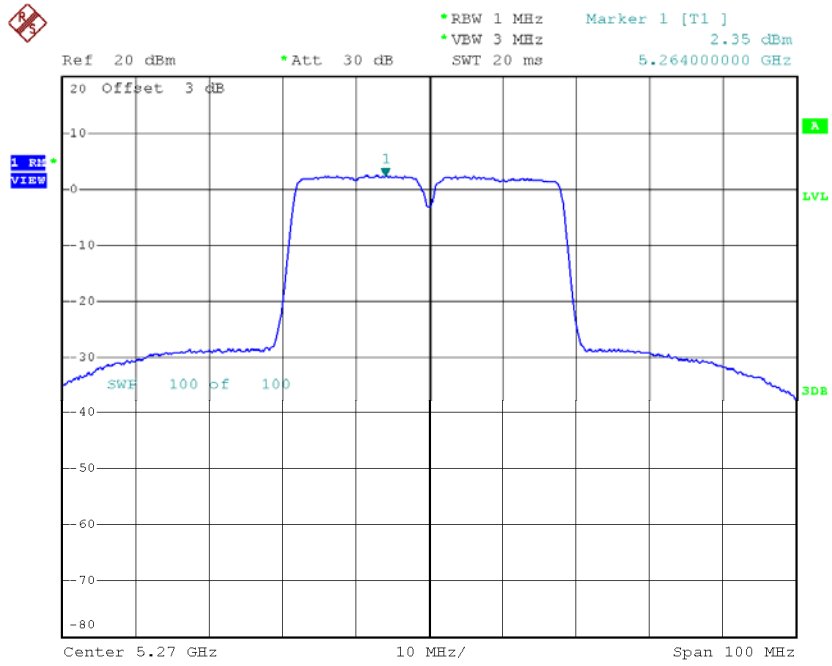

Date: 11.APR.2016 20:46:09

CH62

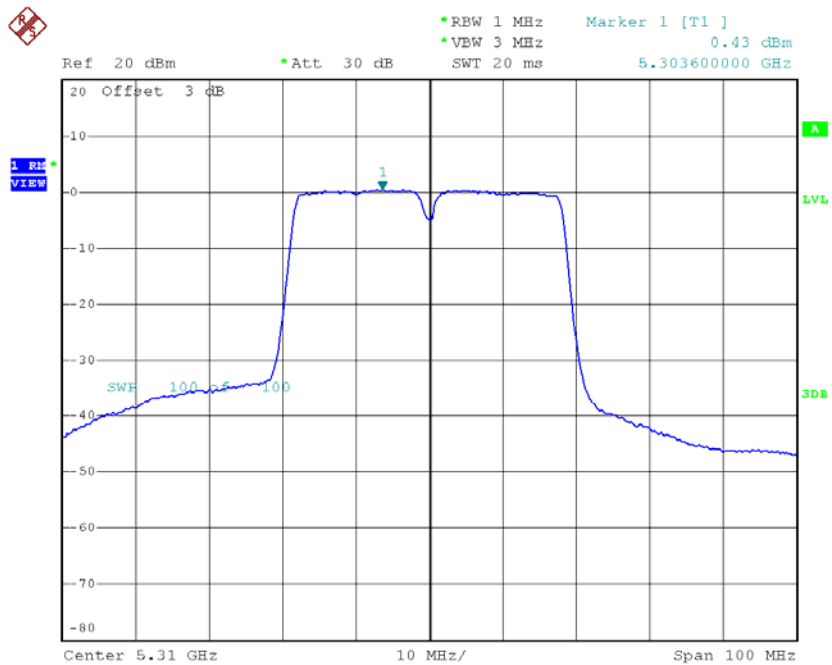


Date: 11.APR.2016 20:47:13

Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	2.66	0.73	3.39	11.00
CH62	5310	-0.71	0.73	0.02	11.00

CH54

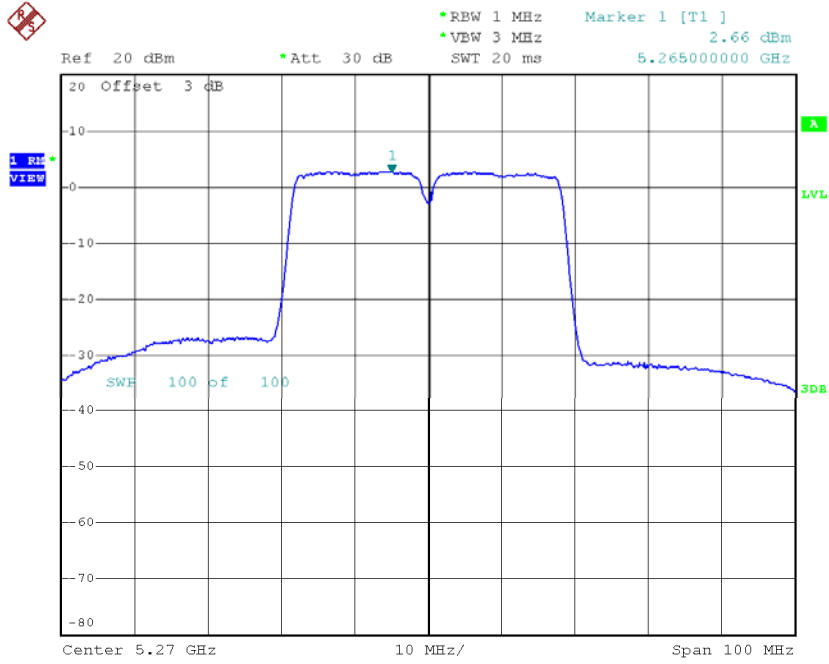

Date: 6.APR.2016 20:54:55

CH62

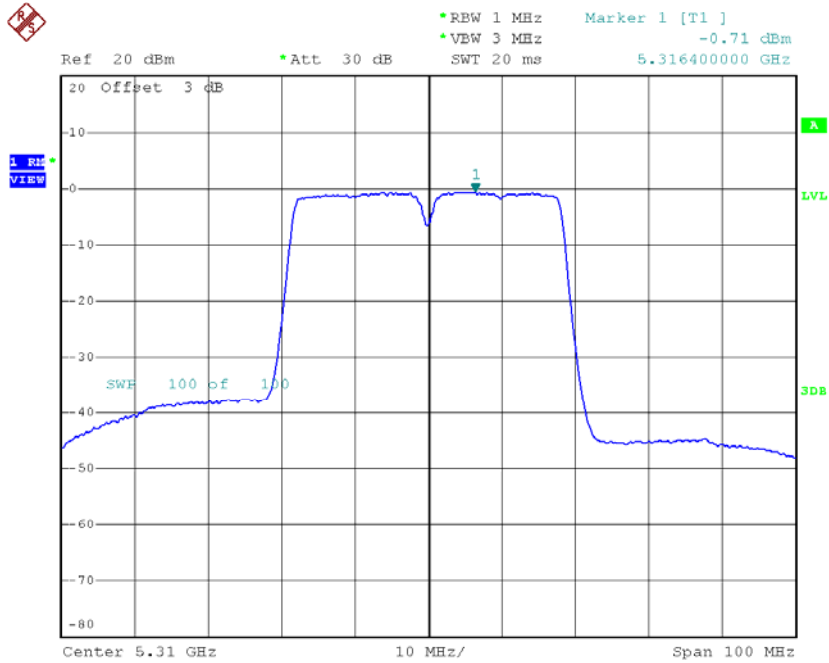

Date: 6.APR.2016 20:55:57


Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	6.25	0.73	6.25	11.00
CH62	5310	3.64	0.73	3.64	11.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	0.77	1.46	0.77	11.00

CH116

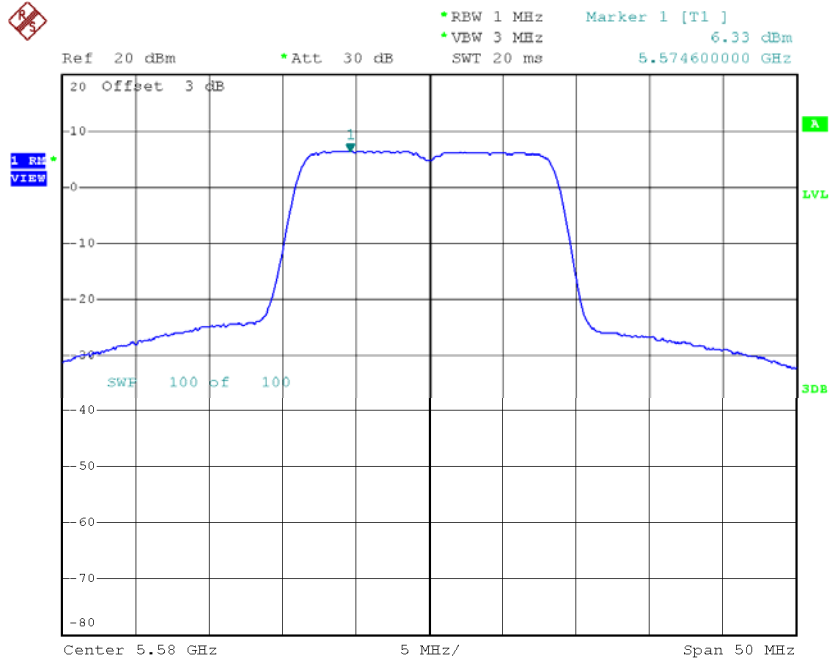

Date: 11.APR.2016 20:27:43


CH140

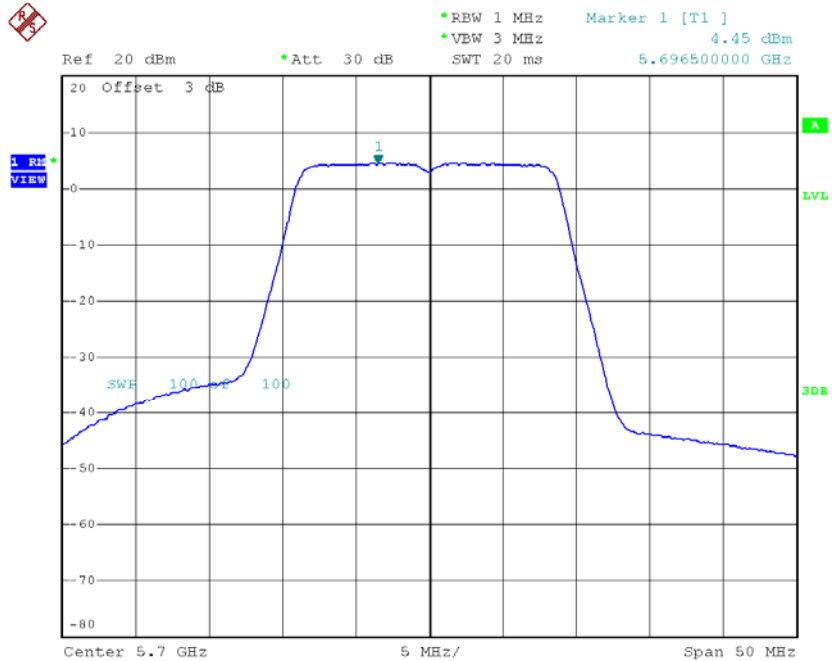

Date: 11.APR.2016 20:28:42


Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	5.27	0.22	5.49	11.00
CH116	5580	6.18	0.22	6.40	11.00
CH140	5700	2.54	0.22	2.76	11.00

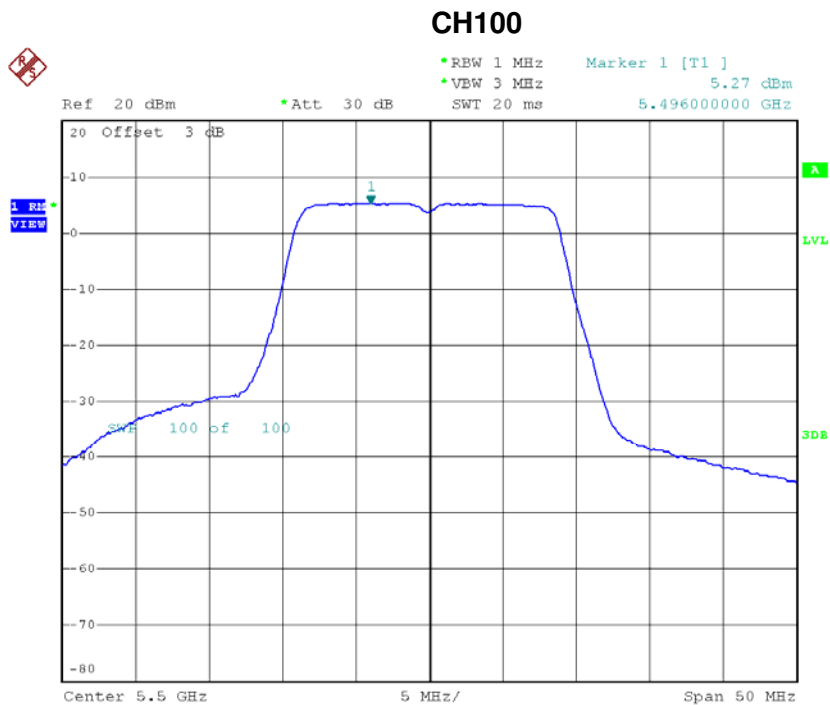


Date: 6.APR.2016 20:21:38

CH116

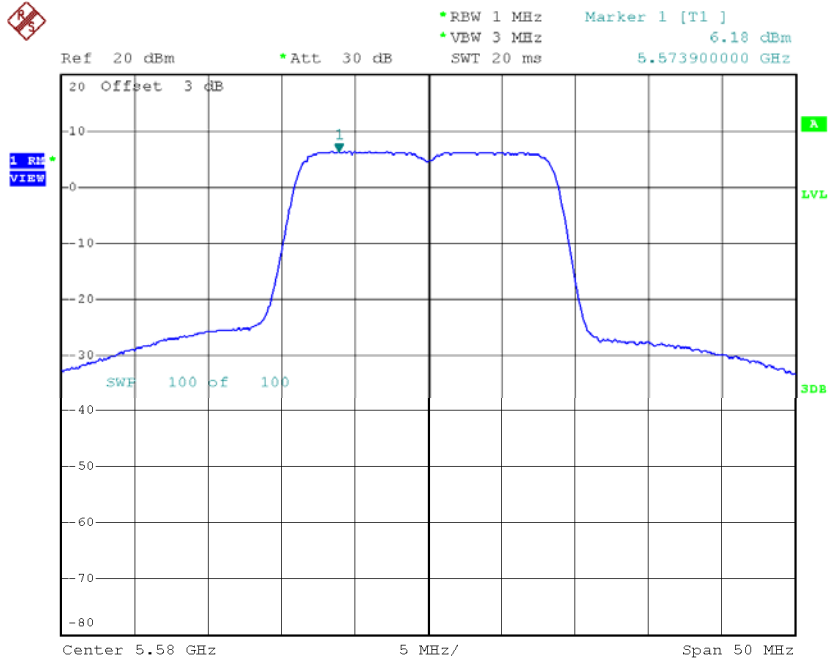

Date: 6.APR.2016 20:25:26

CH140

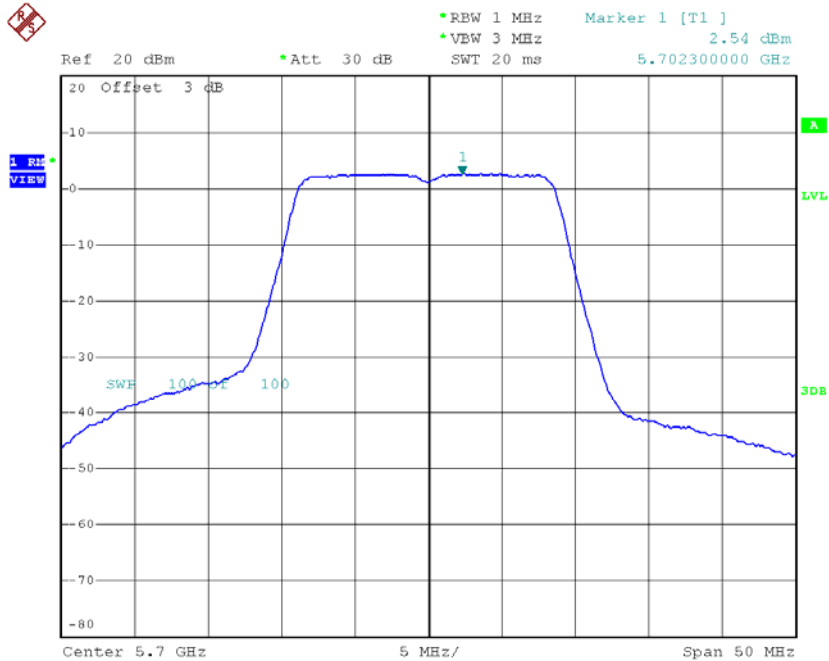


Date: 6.APR.2016 20:27:09

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	8.24	0.22	8.24	11.00
CH116	5580	9.49	0.22	9.49	11.00
CH140	5700	6.83	0.22	6.83	11.00


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-1.41	0.73	-0.68	11.00
CH110	5550	3.52	0.73	4.25	11.00
CH134	5670	2.02	0.73	2.75	11.00

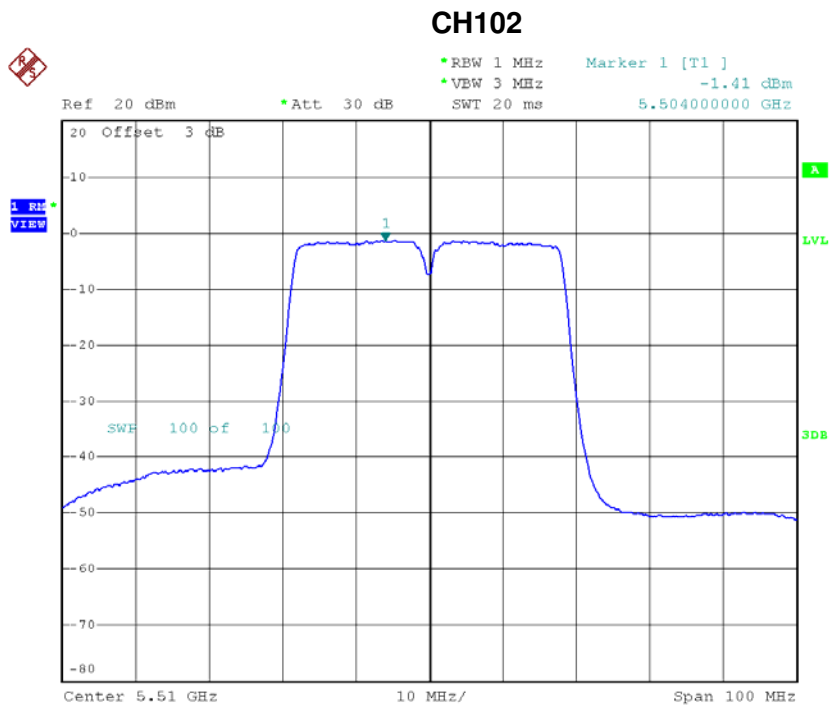


Date: 11.APR.2016 20:49:07

CH110

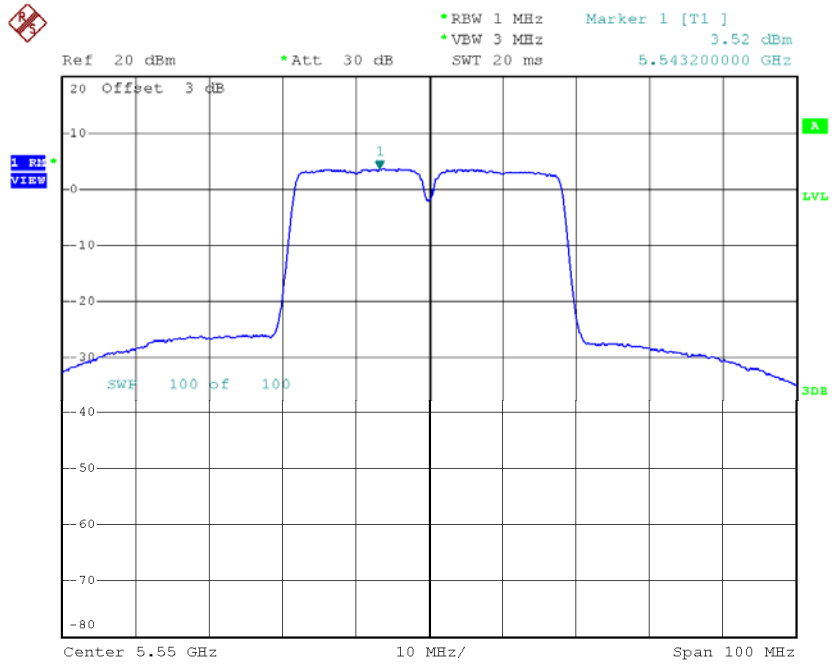

Date: 11.APR.2016 20:50:12

CH134

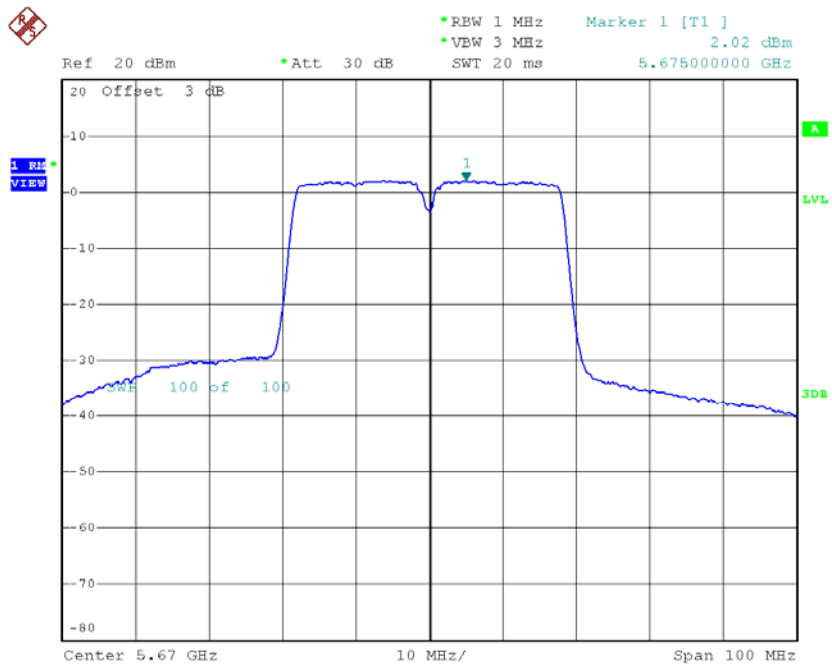


Date: 11.APR.2016 20:51:16

Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-1.63	0.73	-0.90	11.00
CH110	5550	3.88	0.73	4.61	11.00
CH134	5670	-0.11	0.73	0.62	11.00

CH102

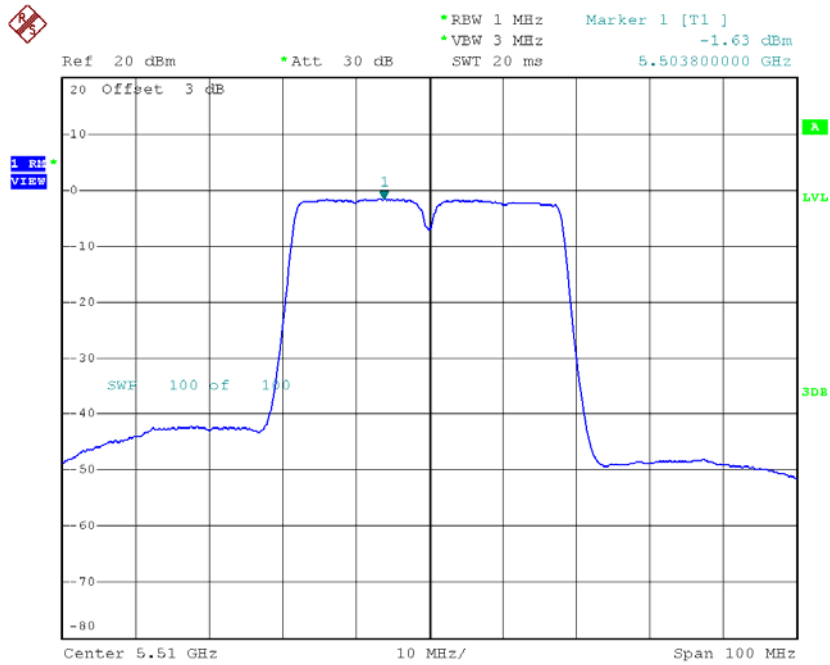


Date: 6.APR.2016 20:58:12

CH110

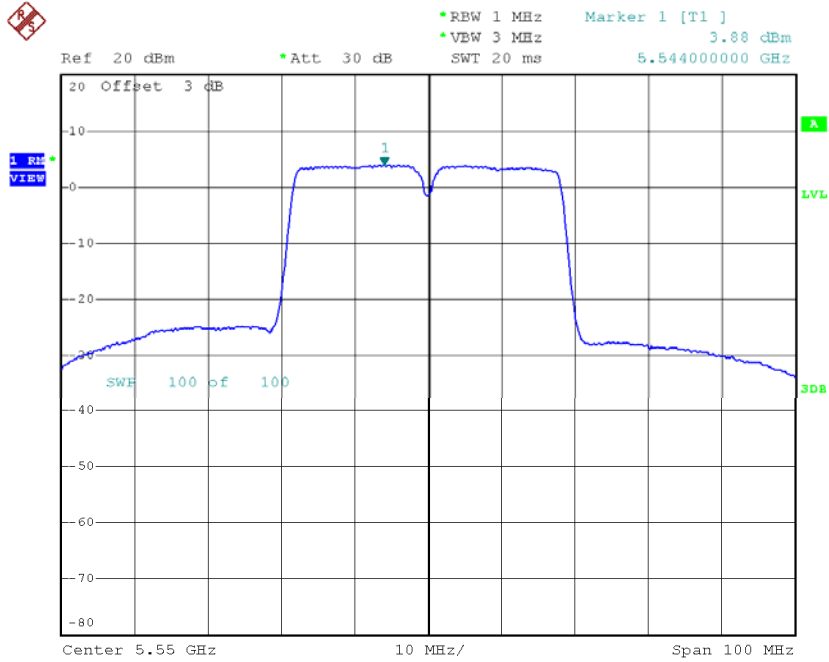

Date: 6.APR.2016 20:59:26

CH134

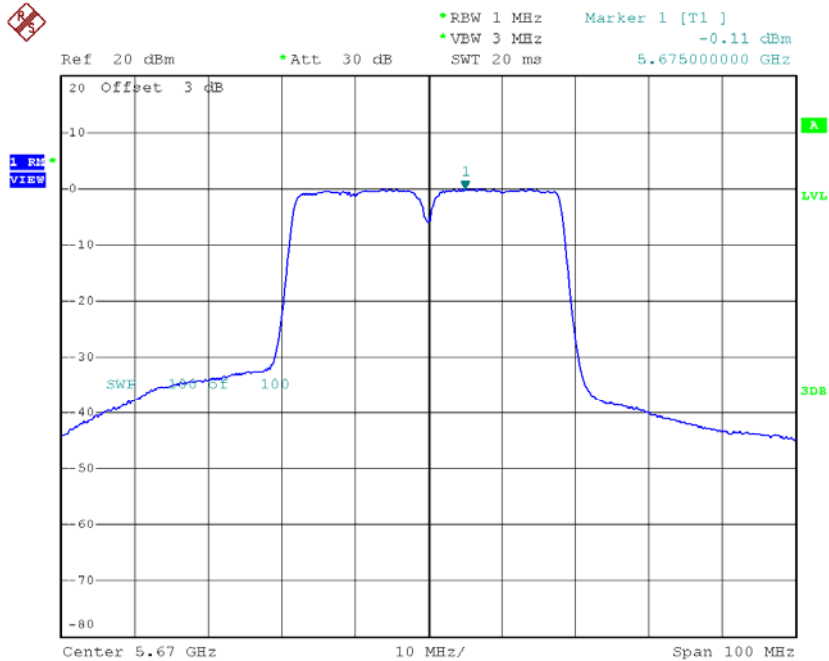

Date: 6.APR.2016 21:00:23


Test Mode: UNII-2C/TX AC40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	2.22	0.73	2.22	11.00
CH110	5550	7.44	0.73	7.44	11.00
CH134	5670	4.82	0.73	4.82	11.00

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-3.64	1.46	-2.18	11.00
CH122	5610	0.21	1.46	1.67	11.00

CH106

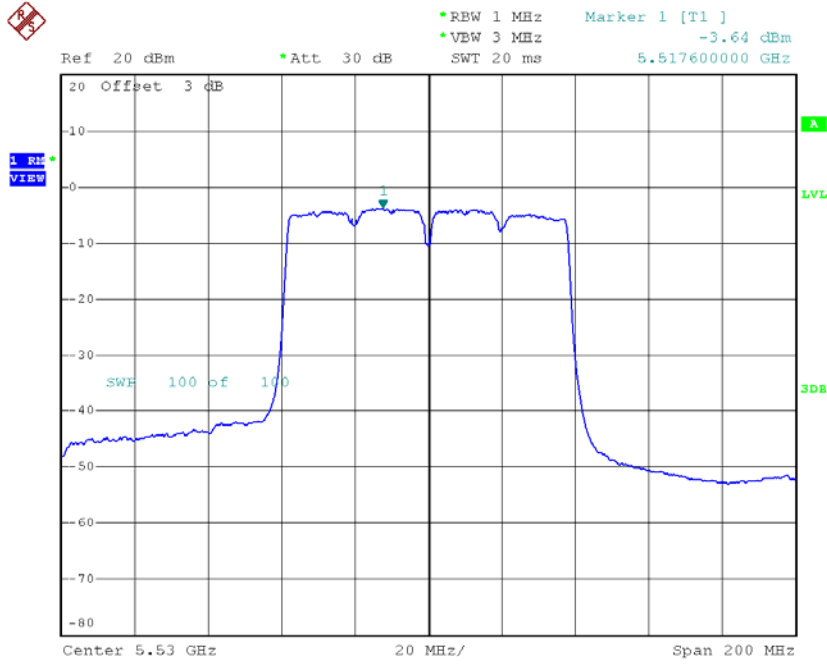

Date: 11.APR.2016 20:57:55

CH122

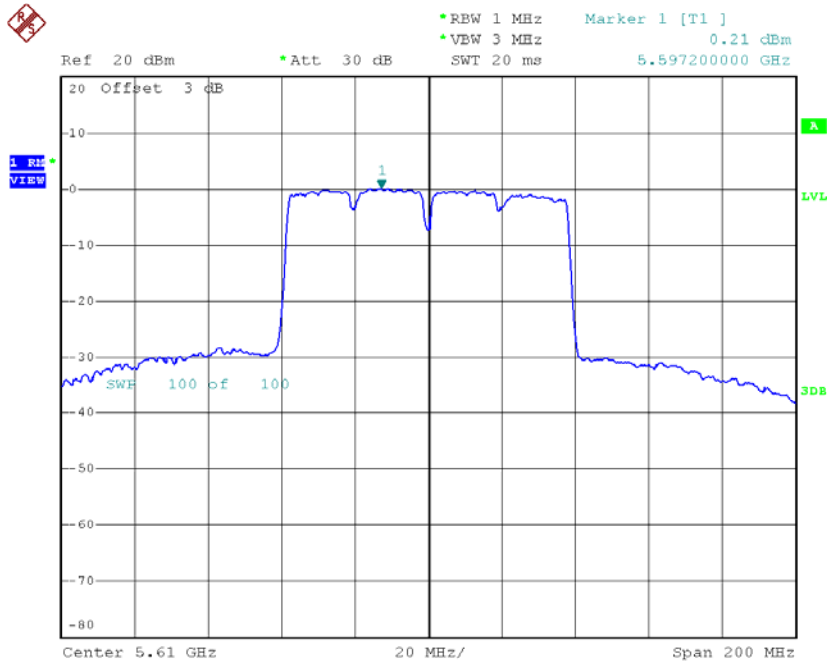


Date: 11.APR.2016 20:59:16

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-2.78	1.46	-1.32	11.00
CH122	5610	-1.09	1.46	0.37	11.00

CH106

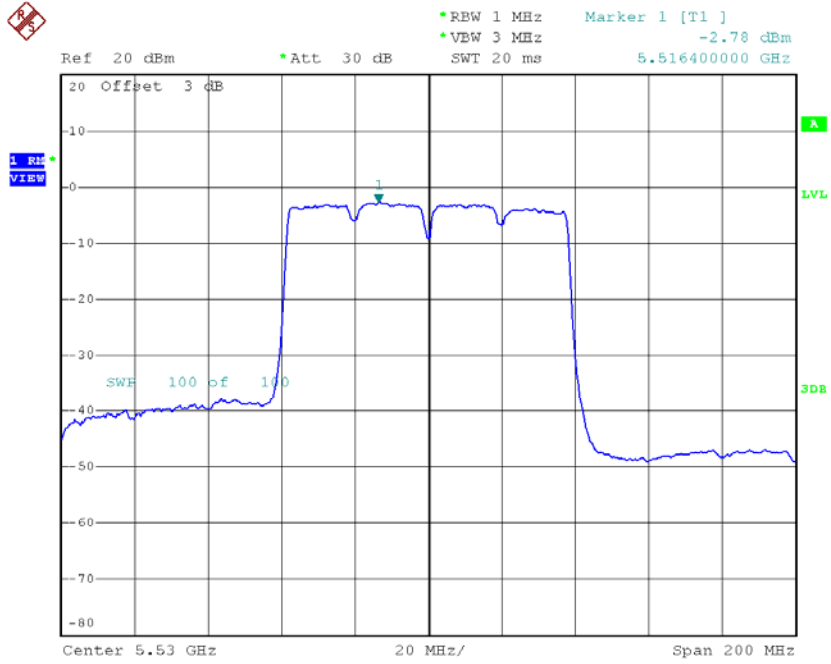

Date: 6.APR.2016 21:12:45

CH122

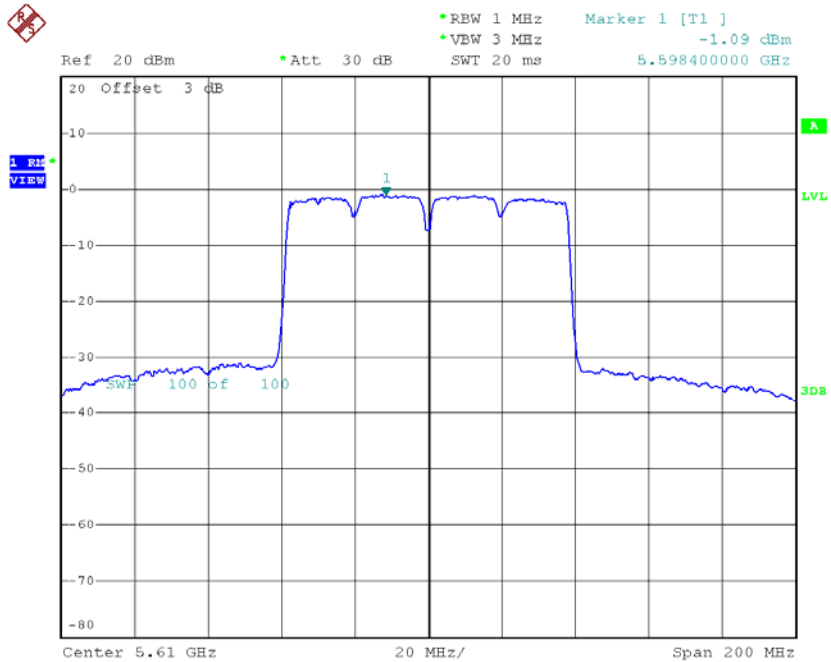


Date: 6.APR.2016 21:18:18

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	1.28	1.46	1.28	11.00
CH122	5610	4.08	1.46	4.08	11.00

TX CH157

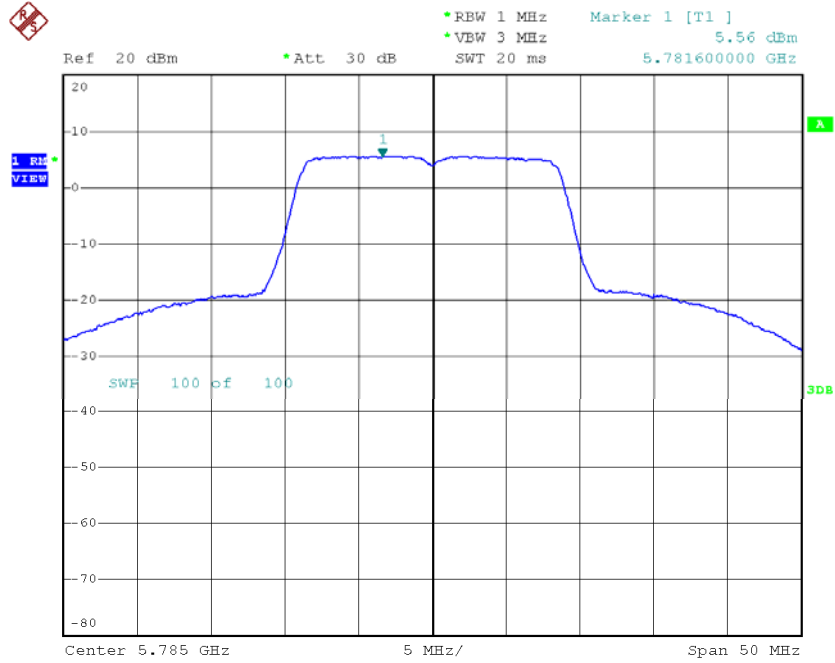

Date: 11.APR.2016 20:30:52

TX CH165

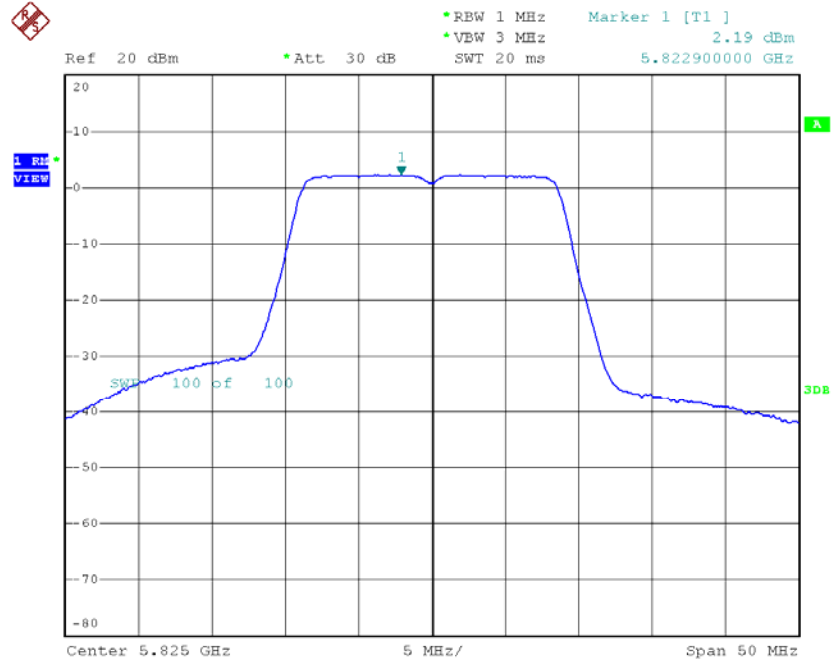


Date: 11.APR.2016 20:32:01

Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	0.33	0.22	0.55	30.00
CH157	5785	5.51	0.22	5.73	30.00
CH165	5825	2.53	0.22	2.75	30.00

TX CH149

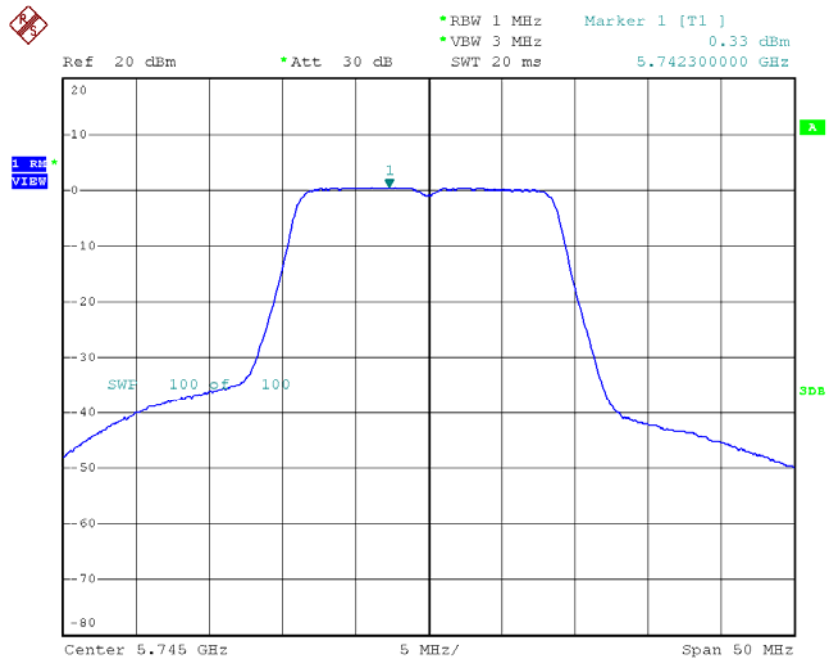


Date: 6.APR.2016 20:28:22

TX CH157

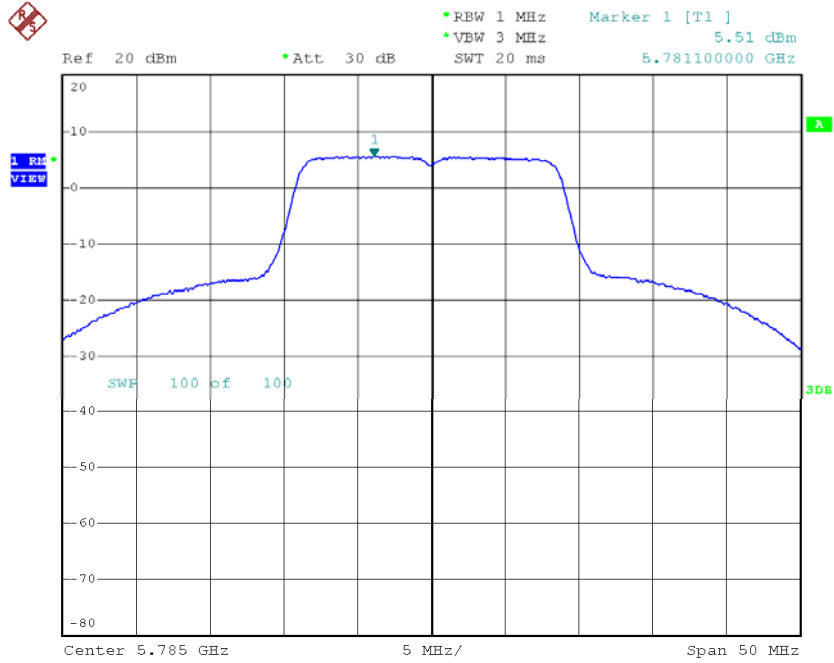

Date: 6.APR.2016 20:29:35

TX CH165

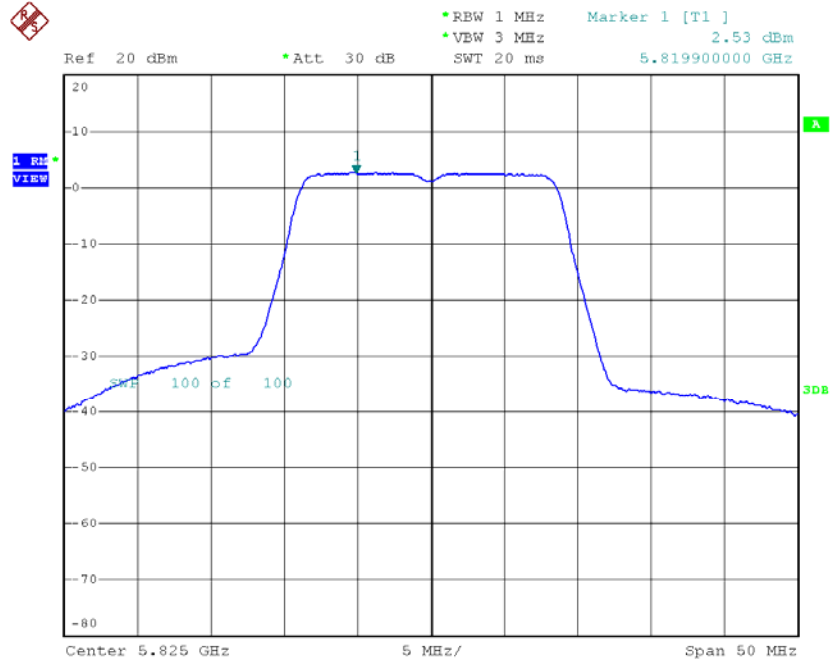

Date: 6.APR.2016 20:31:04


Test Mode: UNII-3/ TX AC20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	4.19	0.22	4.19	30.00
CH157	5785	8.77	0.22	8.77	30.00
CH165	5825	5.59	0.22	5.59	30.00

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-5.61	0.73	-4.88	30.00
CH159	5795	-1.20	0.73	-0.47	30.00

TX CH151

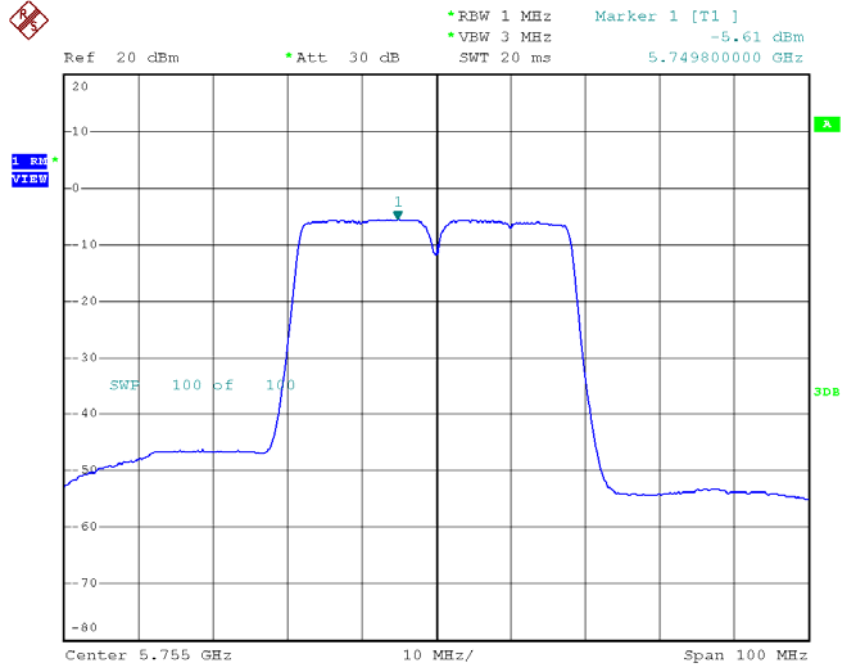

Date: 11.APR.2016 20:52:25


TX CH159

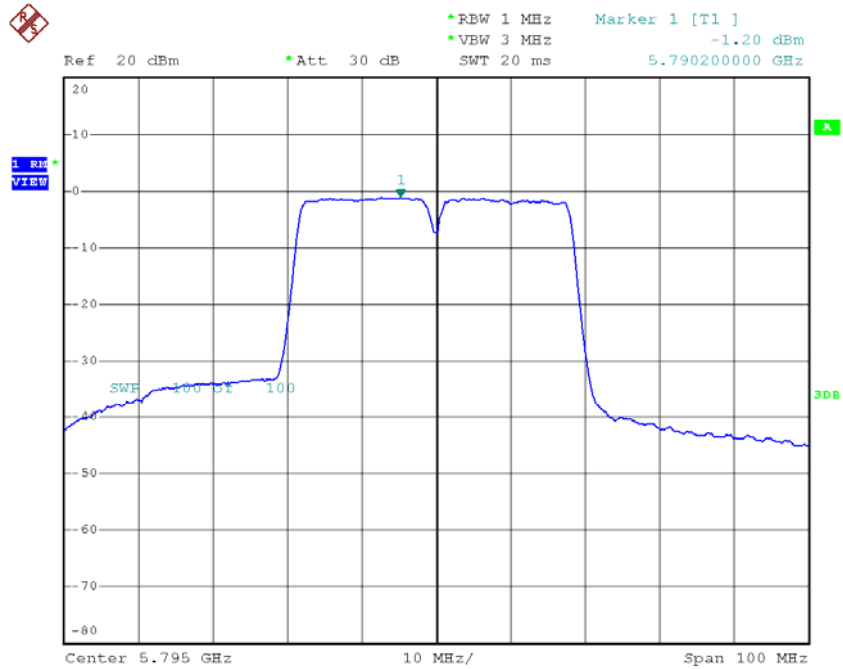


Date: 11.APR.2016 20:53:33

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-6.54	0.73	-5.81	30.00
CH159	5795	-1.71	0.73	-0.98	30.00

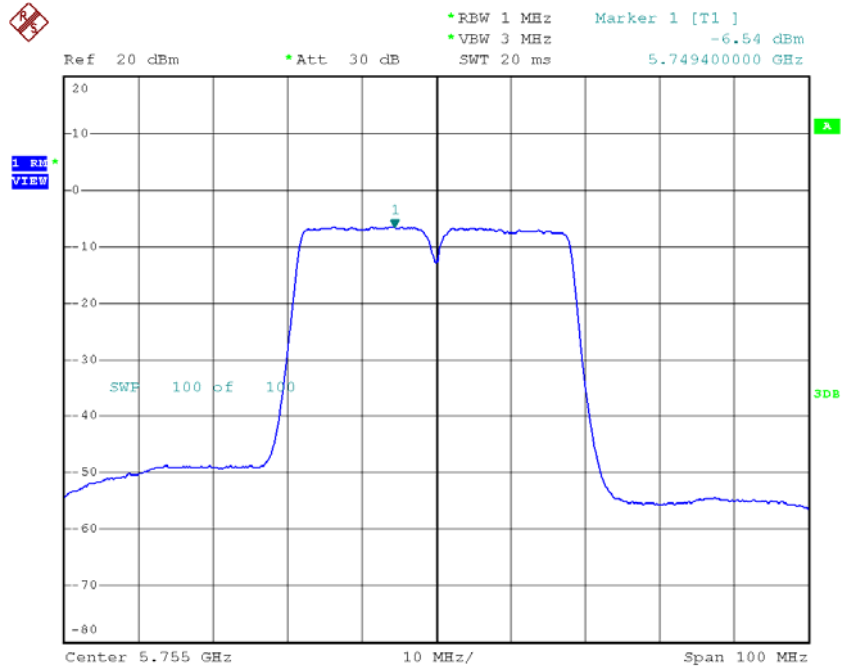TX CH151

Date: 6.APR.2016 21:01:35

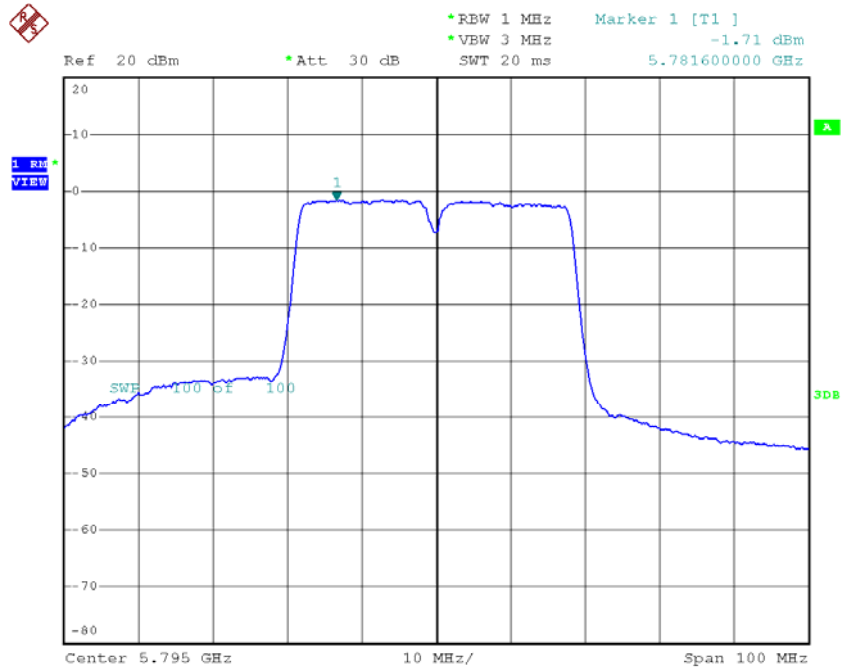TX CH159

Date: 6.APR.2016 21:03:00

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-2.31	0.73	-2.31	30.00
CH159	5795	2.29	0.73	2.29	30.00

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor (dBm/MHz)	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-3.41	1.46	-3.41	30.00

ATTACHMENT I - FREQUENCY STABILITY

Test Mode:	UNII-1
-------------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5179.9096
120	5179.9088
108	5179.9092
Max. Deviation (MHz)	0.0908
Max. Deviation (ppm)	17.5290

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
0	5179.9080
5	5179.9084
15	5179.9084
25	5179.9084
35	5179.9084
45	5179.9080
Max. Deviation (MHz)	0.0920
Max. Deviation (ppm)	17.7606

Test Mode:	UNII-2A
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5259.9068
120	5259.9068
108	5259.9064
Max. Deviation (MHz)	0.0936
Max. Deviation (ppm)	17.7947

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
0	5259.9068
5	5259.9068
15	5259.9064
25	5259.9068
35	5259.9064
45	5259.9064
Max. Deviation (MHz)	0.0936
Max. Deviation (ppm)	17.7947

Test Mode:	UNII-2C
-------------------	----------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5499.9028
120	5499.9024
108	5499.9024
Max. Deviation (MHz)	0.0976
Max. Deviation (ppm)	17.7455

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
0	5499.9024
5	5499.9024
15	5499.9024
25	5499.9024
35	5499.9024
45	5499.9028
Max. Deviation (MHz)	0.0976
Max. Deviation (ppm)	17.7455

Test Mode:	UNII-3
-------------------	---------------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5744.9000
120	5744.9000
108	5744.9000
Max. Deviation (MHz)	0.1000
Max. Deviation (ppm)	17.4064

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
0	5744.9000
5	5744.9000
15	5744.9000
25	5744.9000
35	5744.9000
45	5744.9000
Max. Deviation (MHz)	0.1000
Max. Deviation (ppm)	17.4064