




11A_Ant2_5785

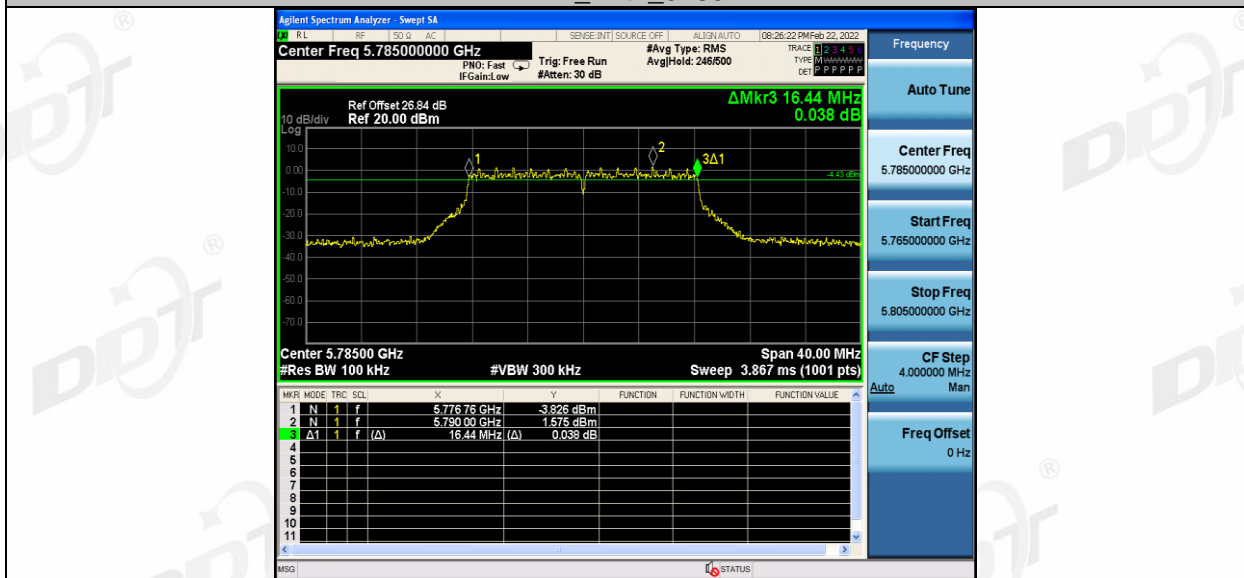


11A_Ant1_5825

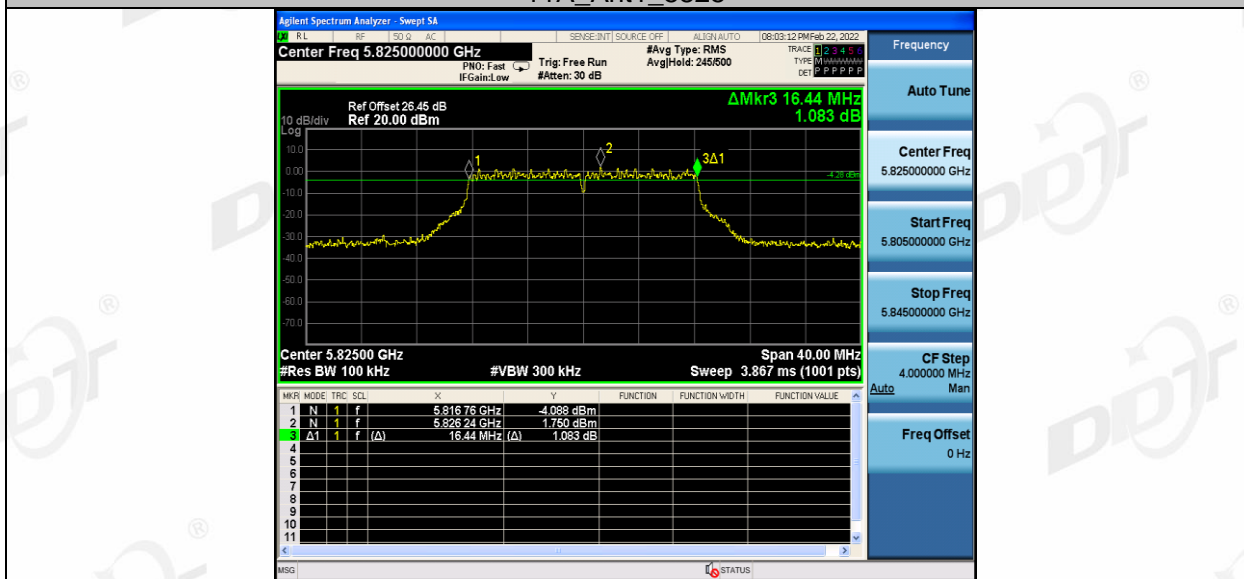


11A_Ant2_5825

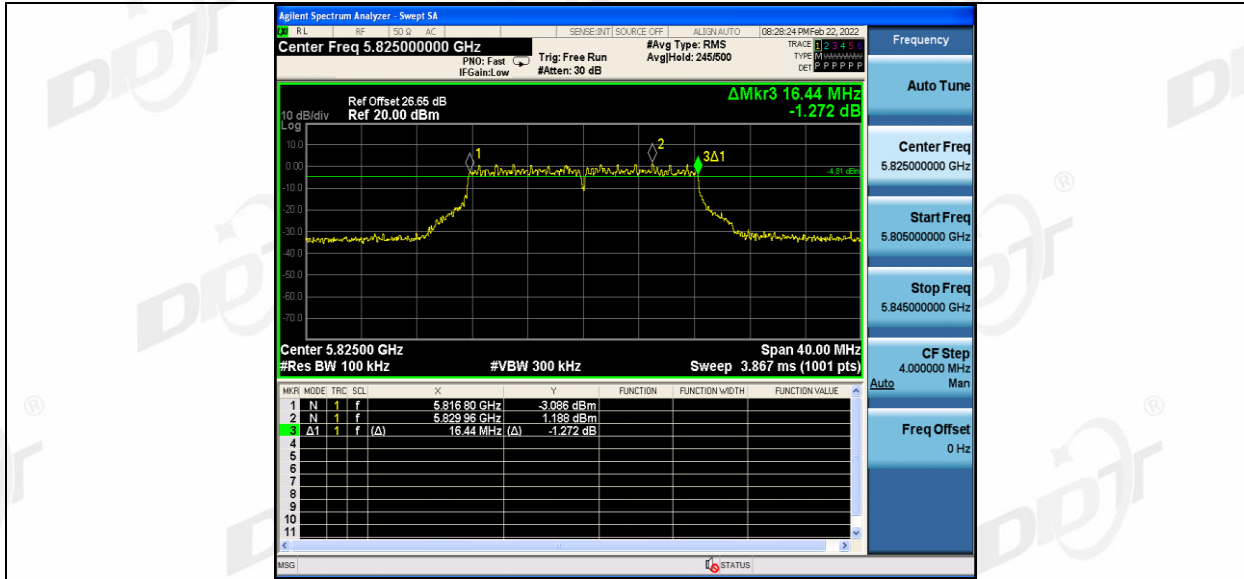


11N20MIMO_Ant1_5745

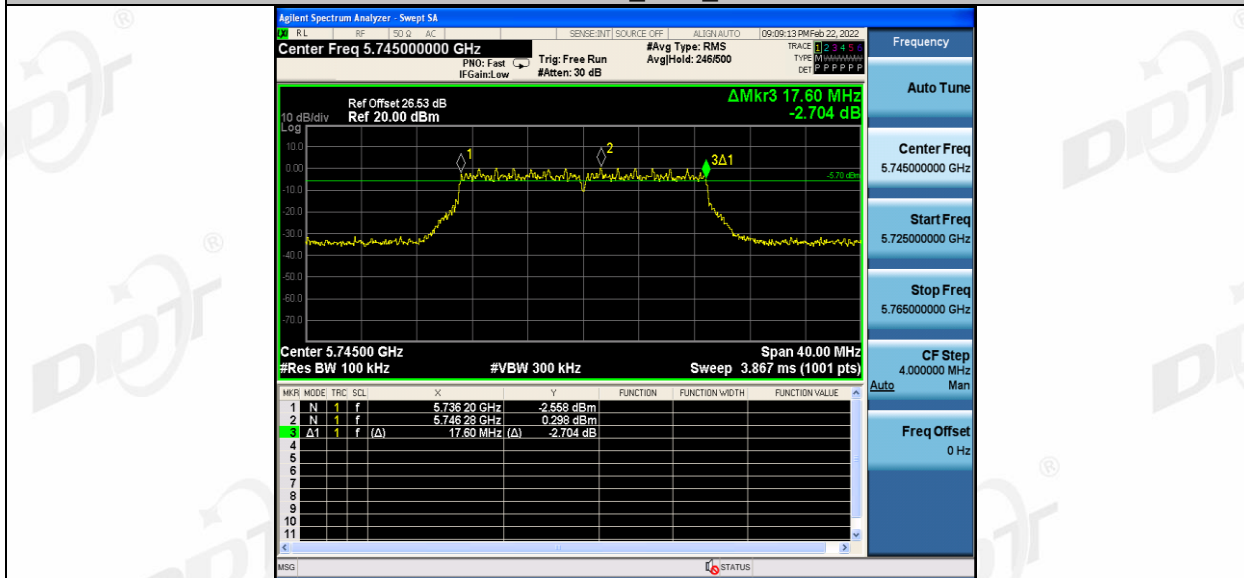


11N20MIMO_Ant2_5745

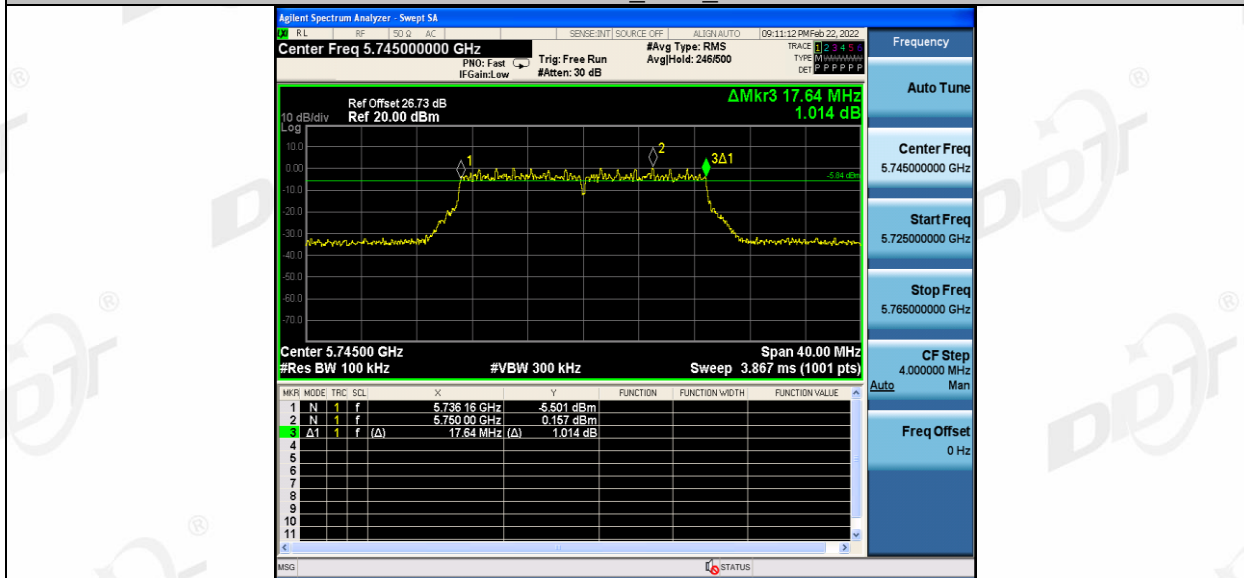


11N20MIMO_Ant1_5785

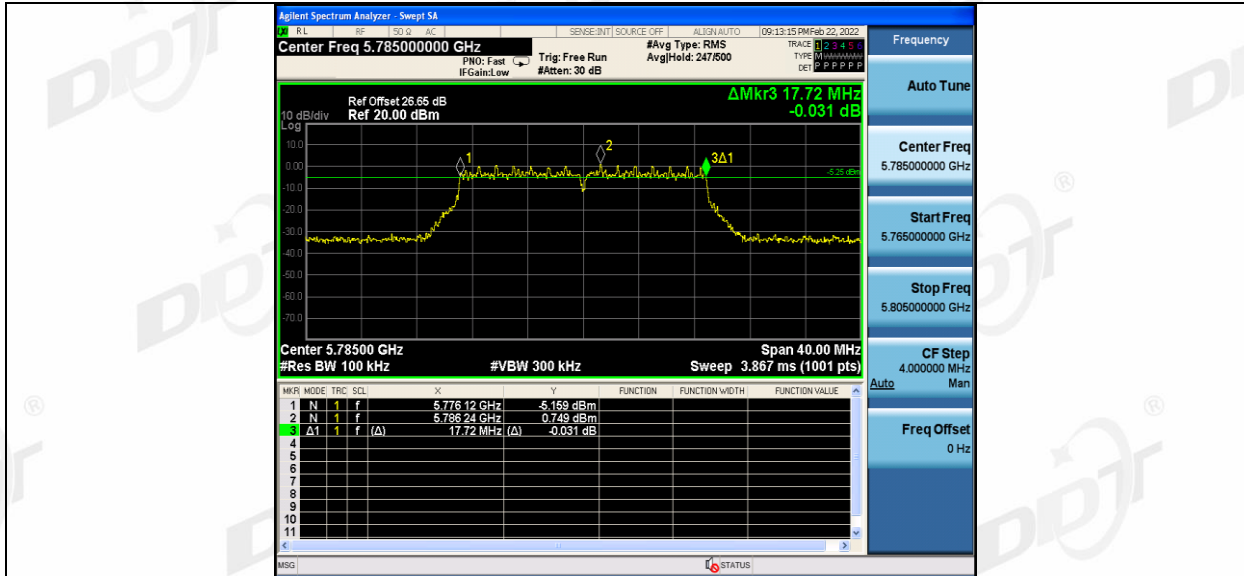


11N20MIMO_Ant2_5785

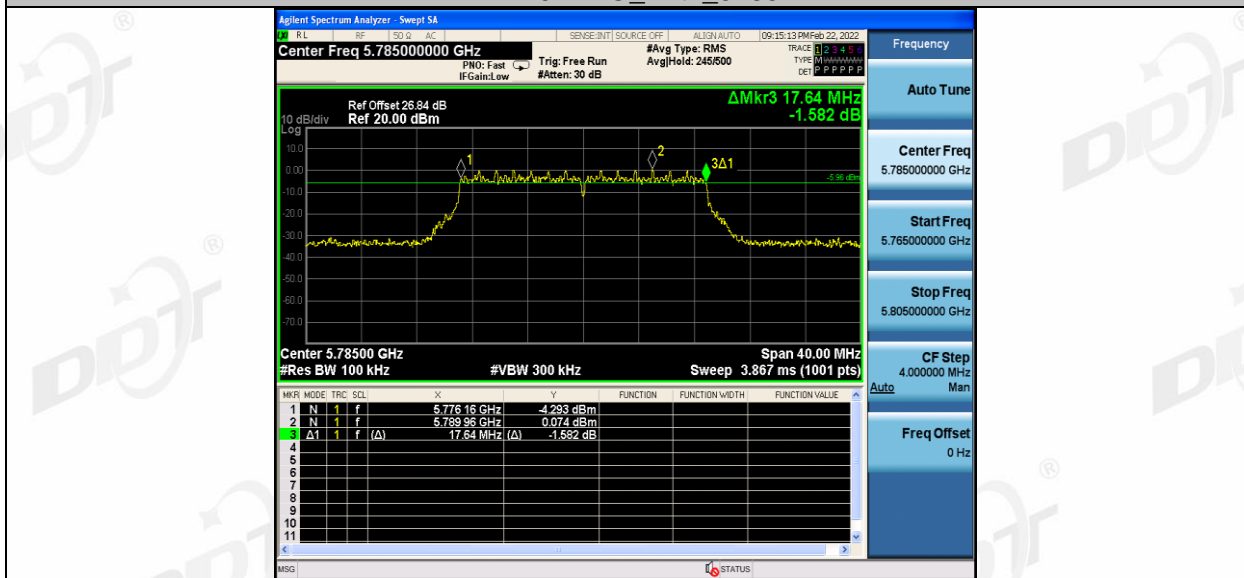


11N20MIMO_Ant1_5825

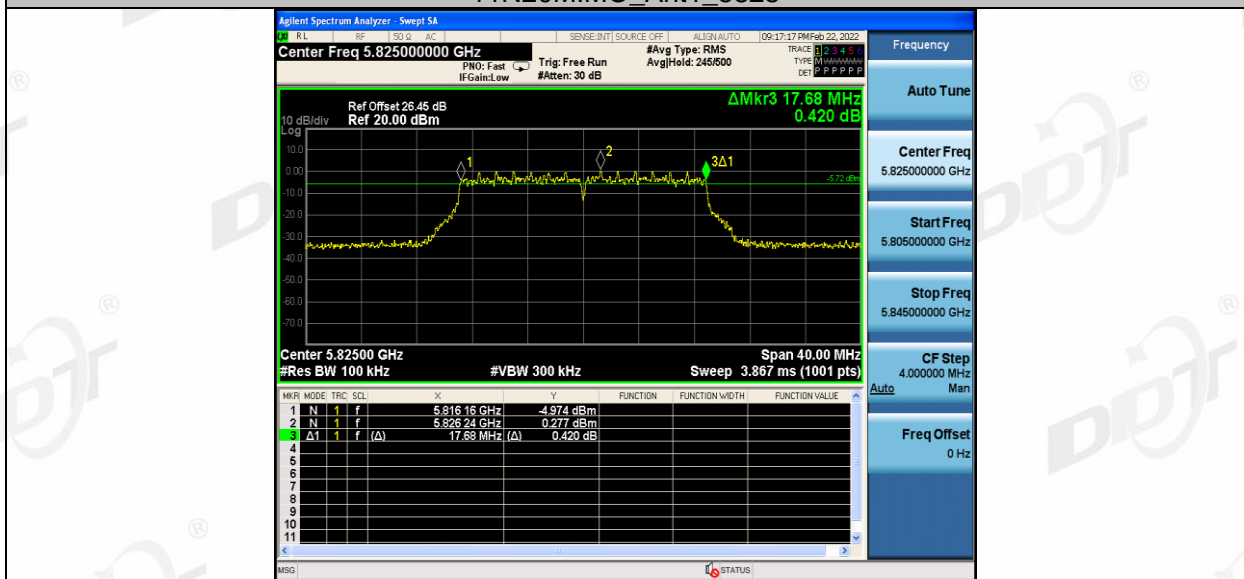


11N20MIMO_Ant2_5825

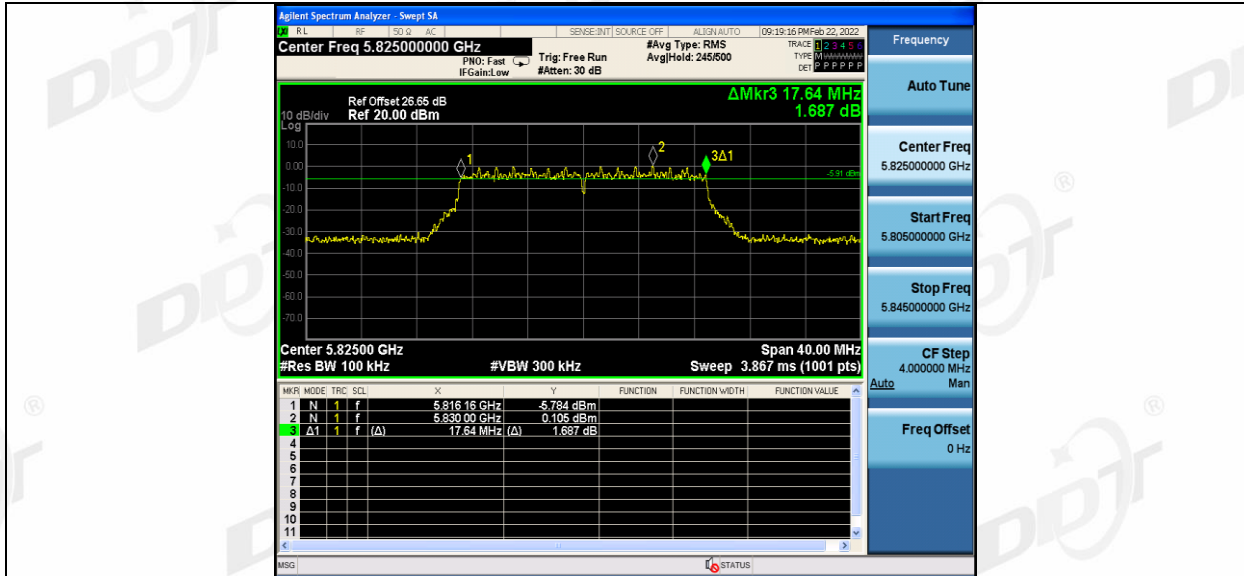


11N40MIMO_Ant1_5755

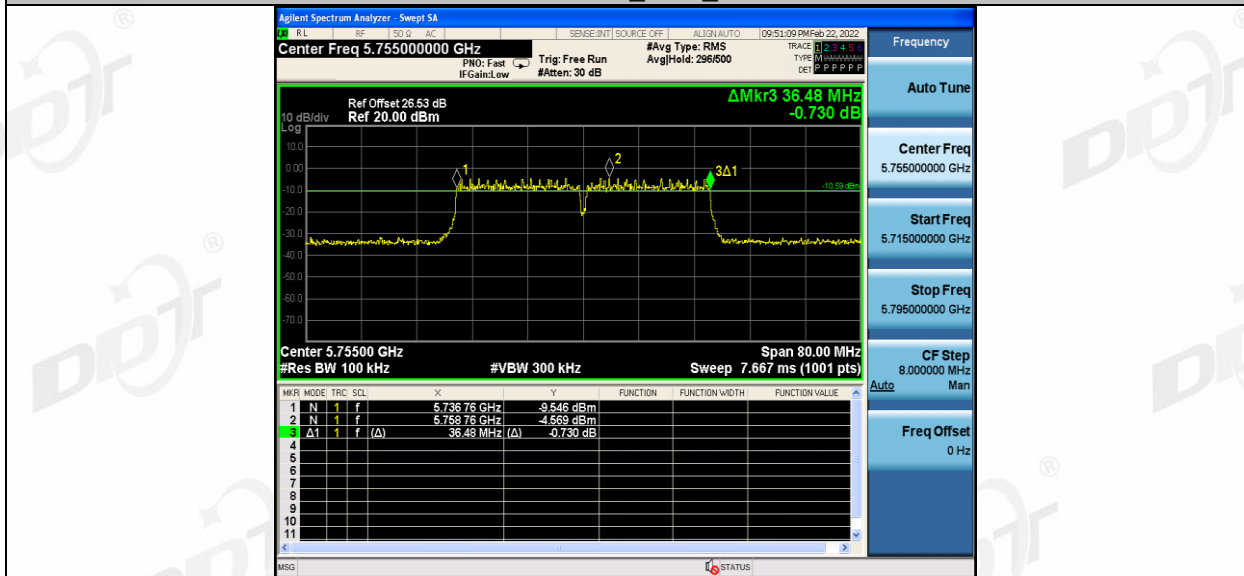


11N40MIMO_Ant2_5755

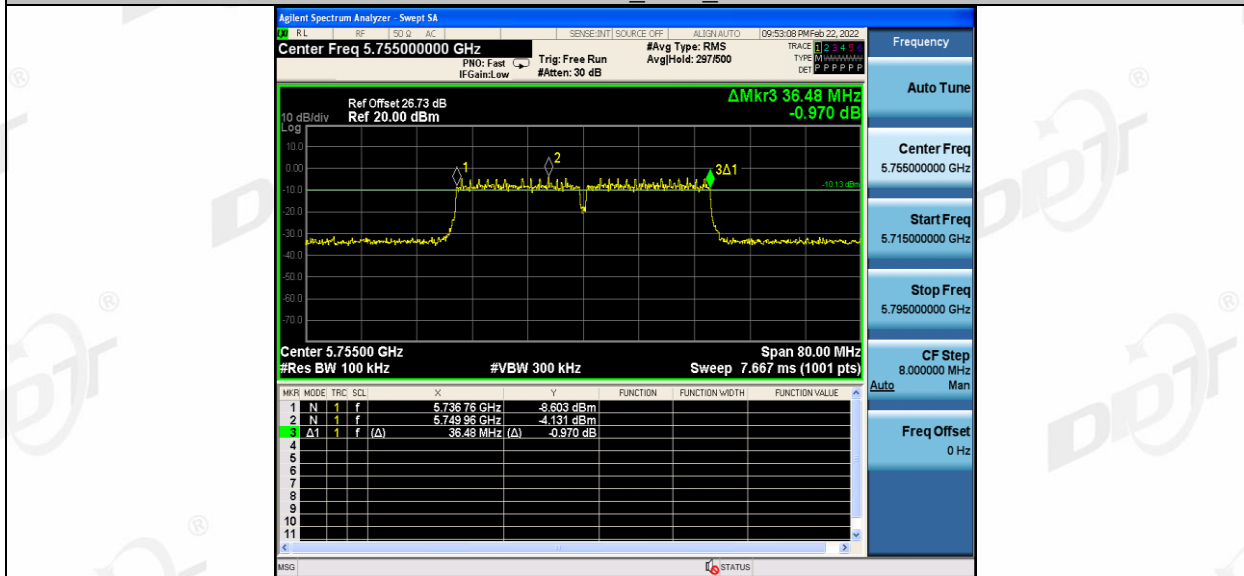


11N40MIMO_Ant1_5795

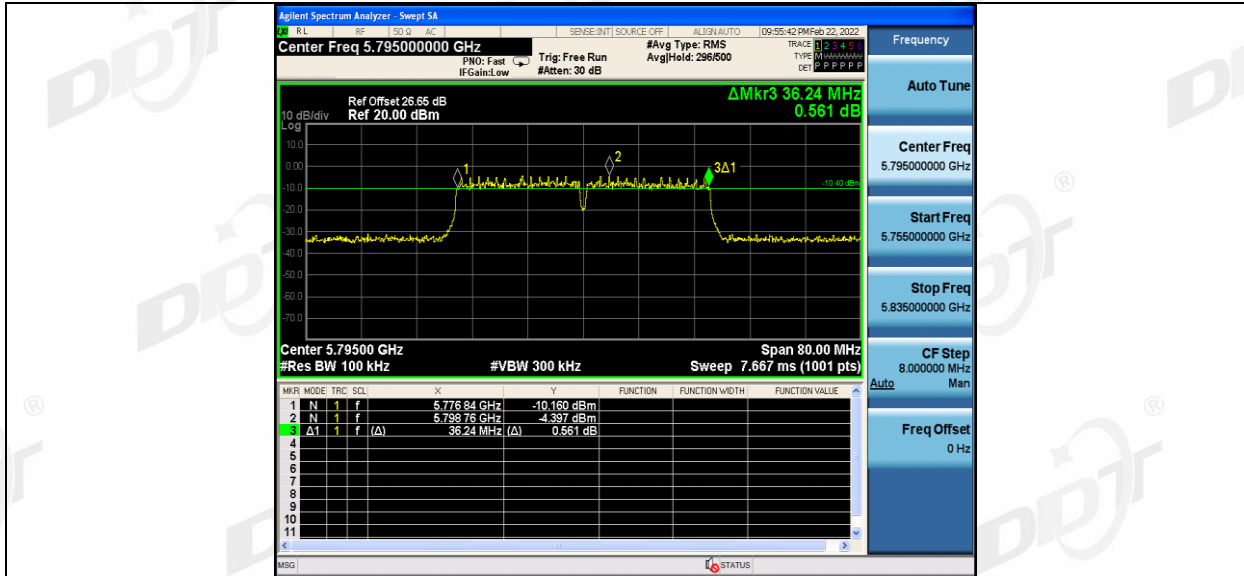


11N40MIMO_Ant2_5795

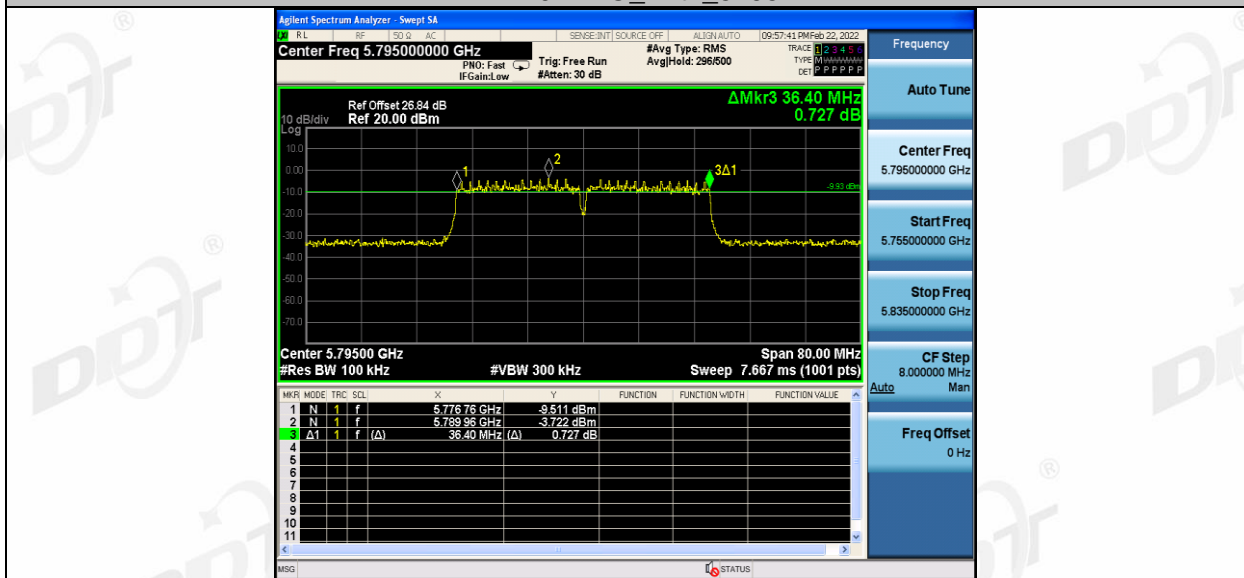


11AC20MIMO_Ant1_5745

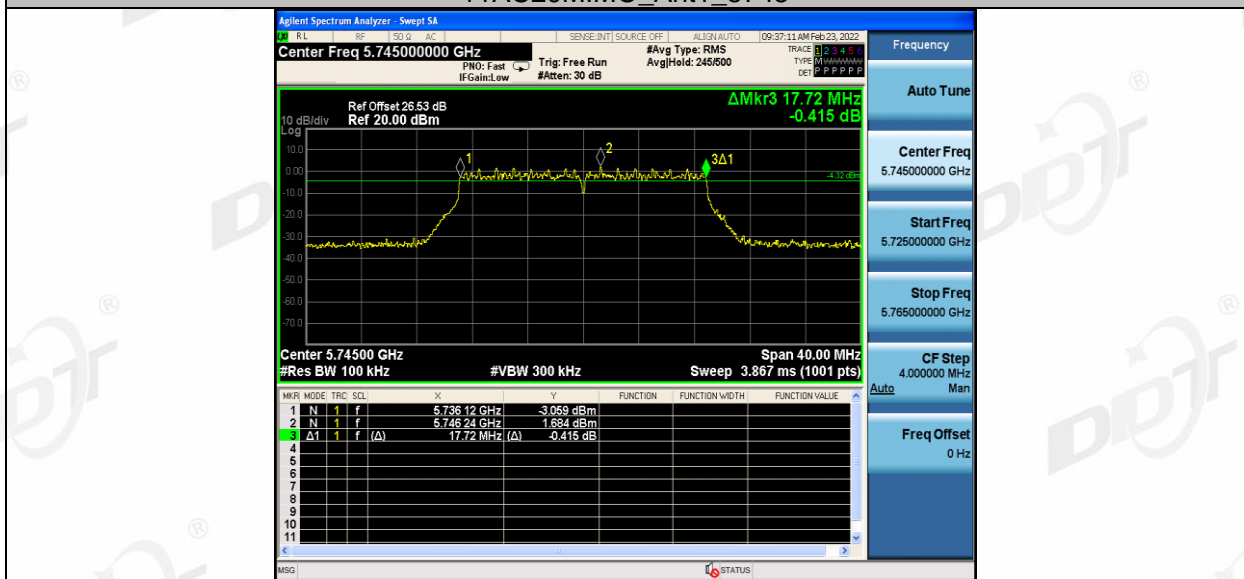


11AC20MIMO_Ant2_5745

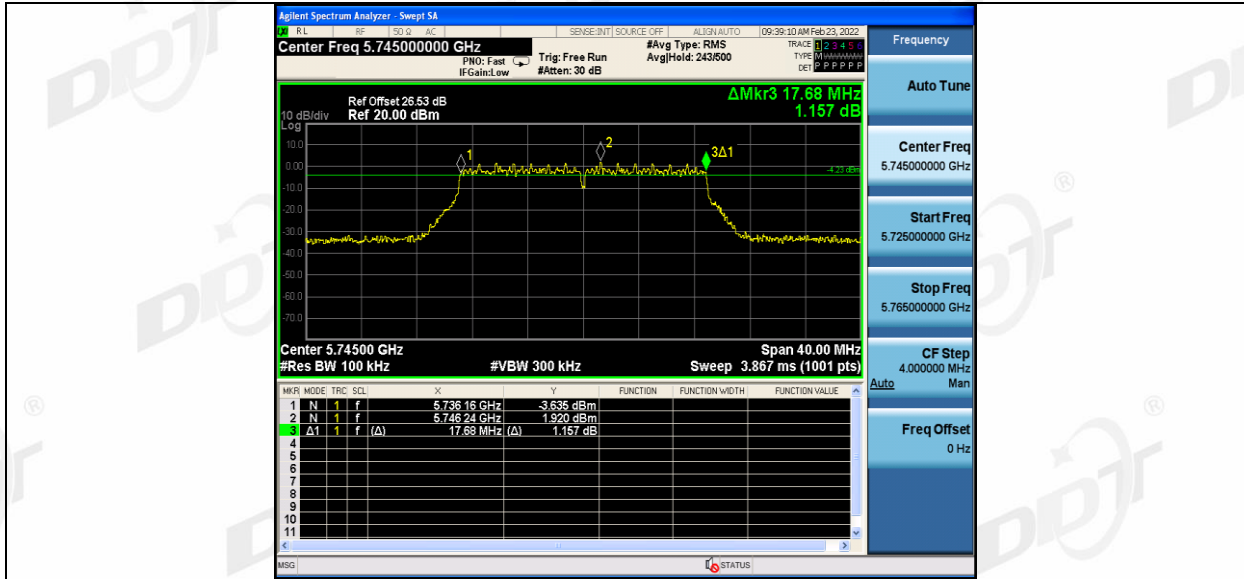


11AC20MIMO_Ant1_5785

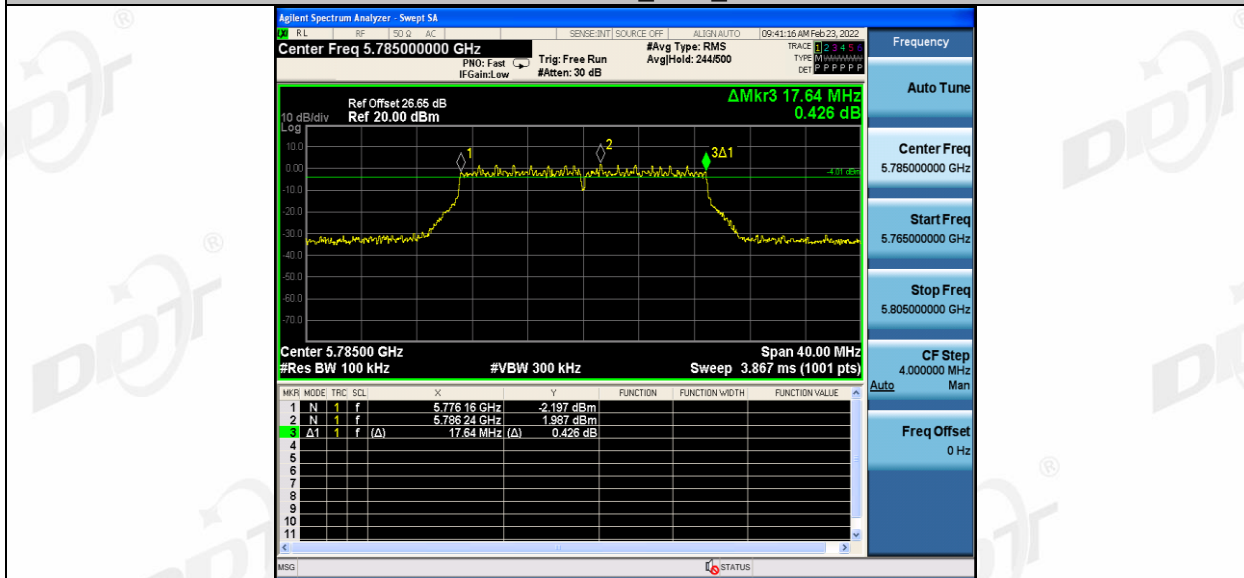


11AC20MIMO_Ant2_5785

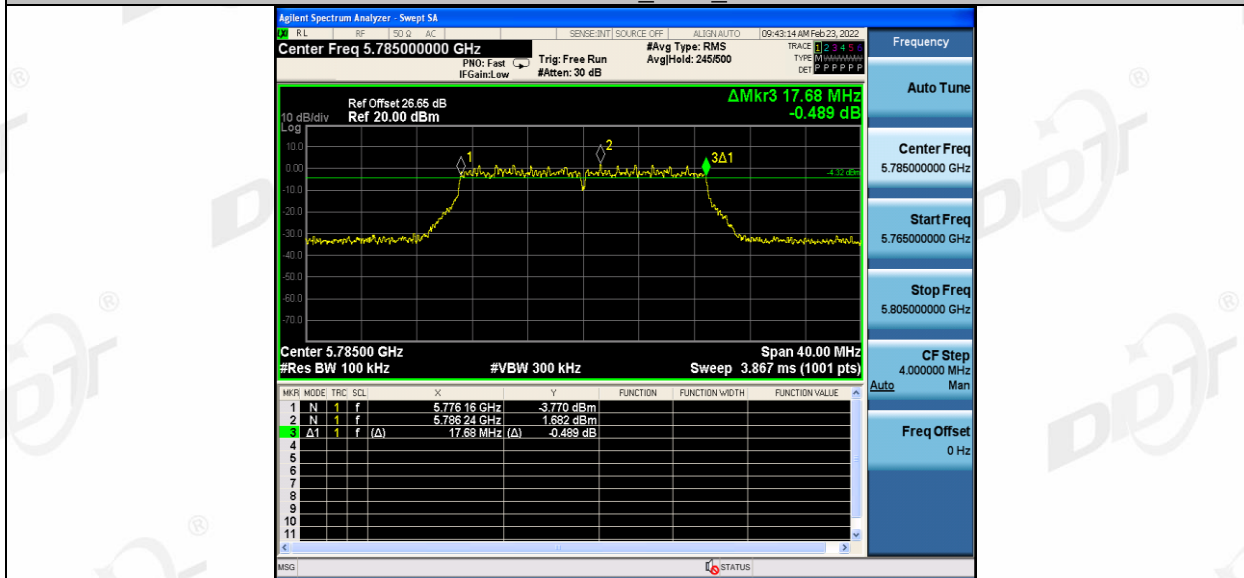


11AC20MIMO_Ant1_5825

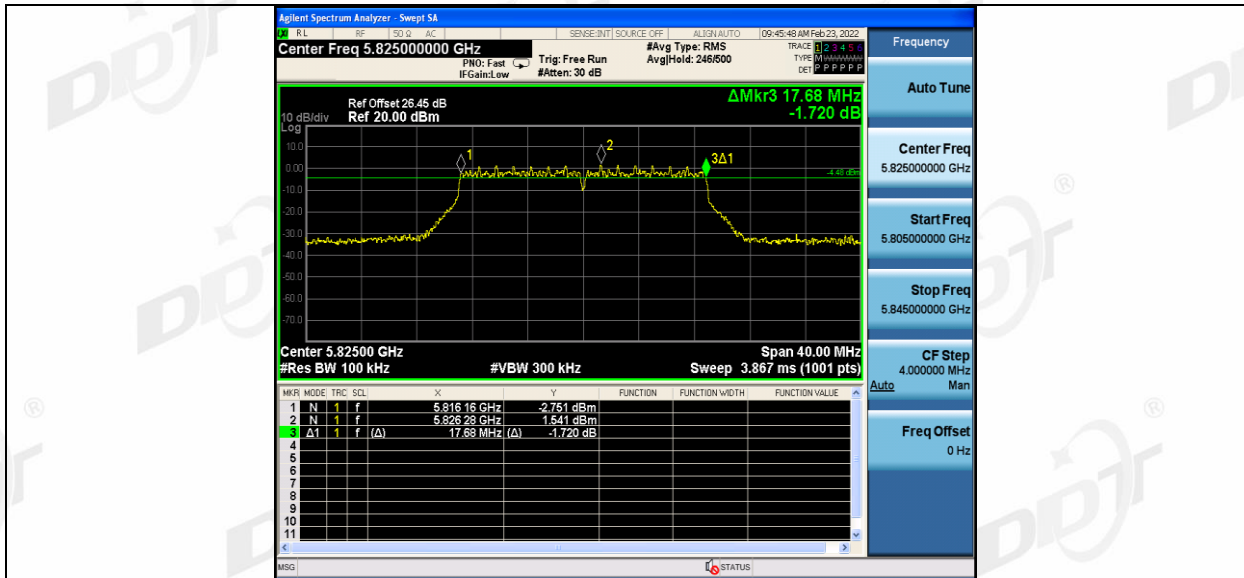


11AC20MIMO_Ant2_5825

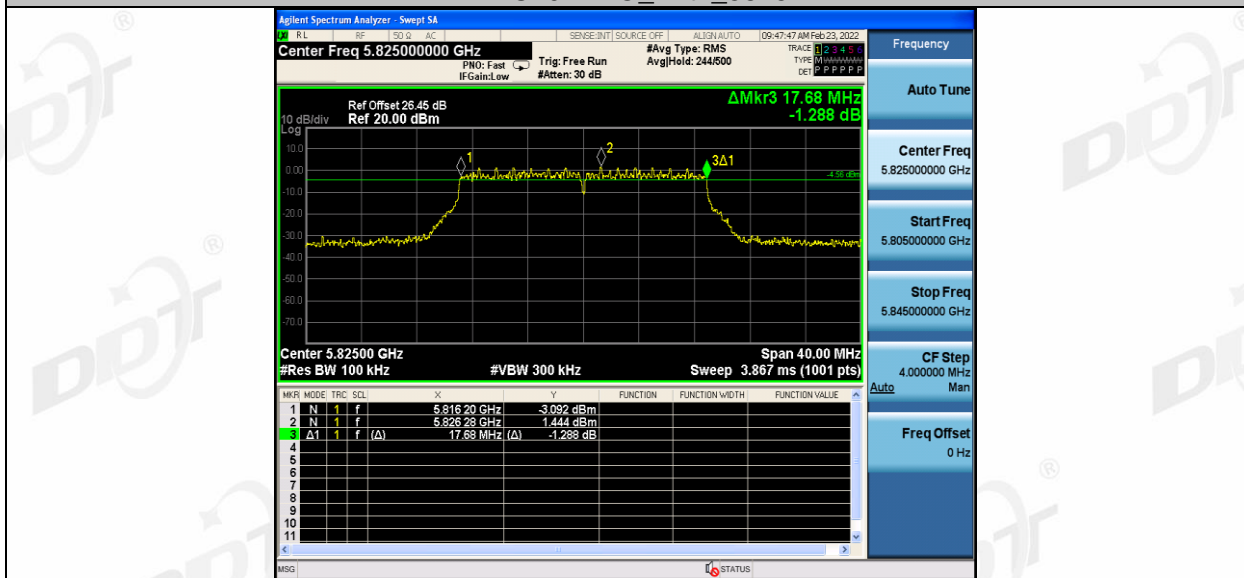


11AC40MIMO_Ant1_5755

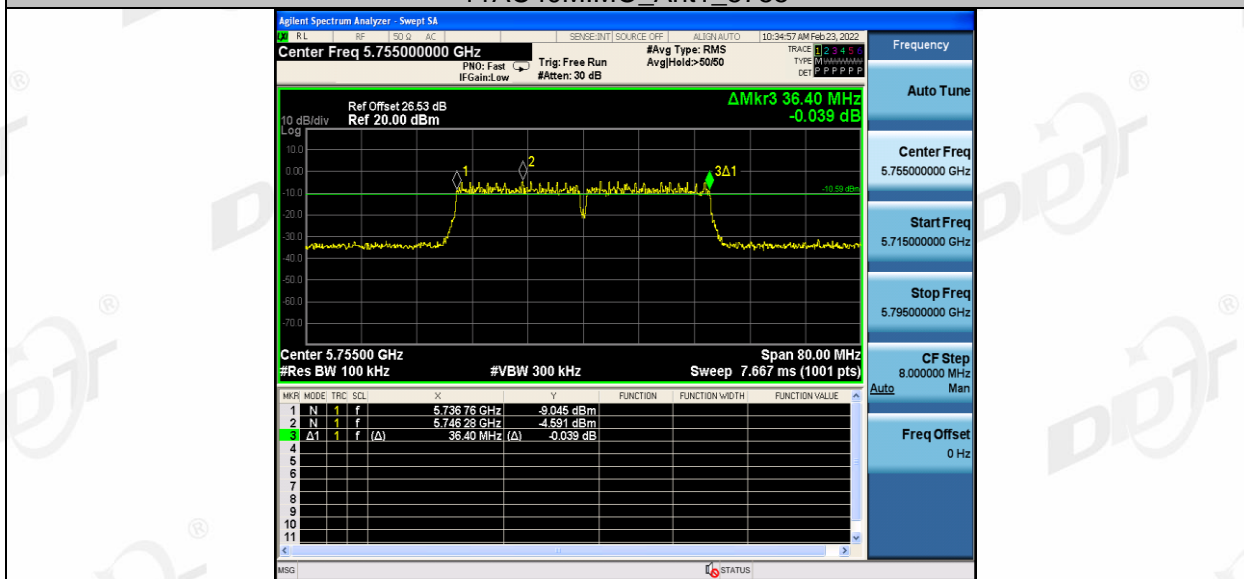


11AC40MIMO_Ant2_5755

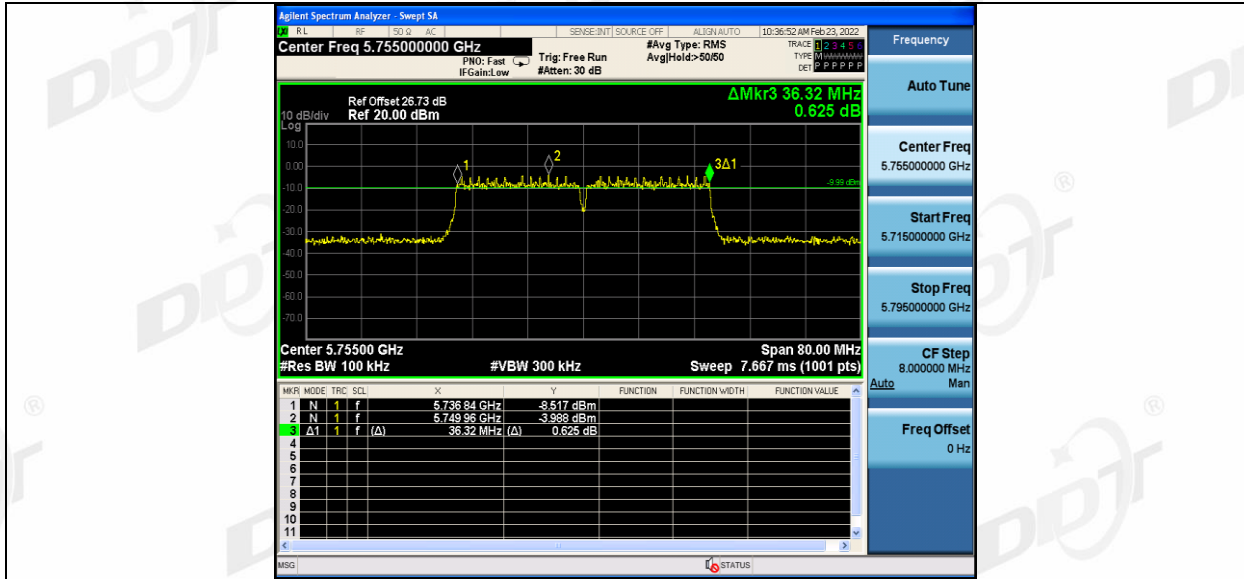


11AC40MIMO_Ant1_5795

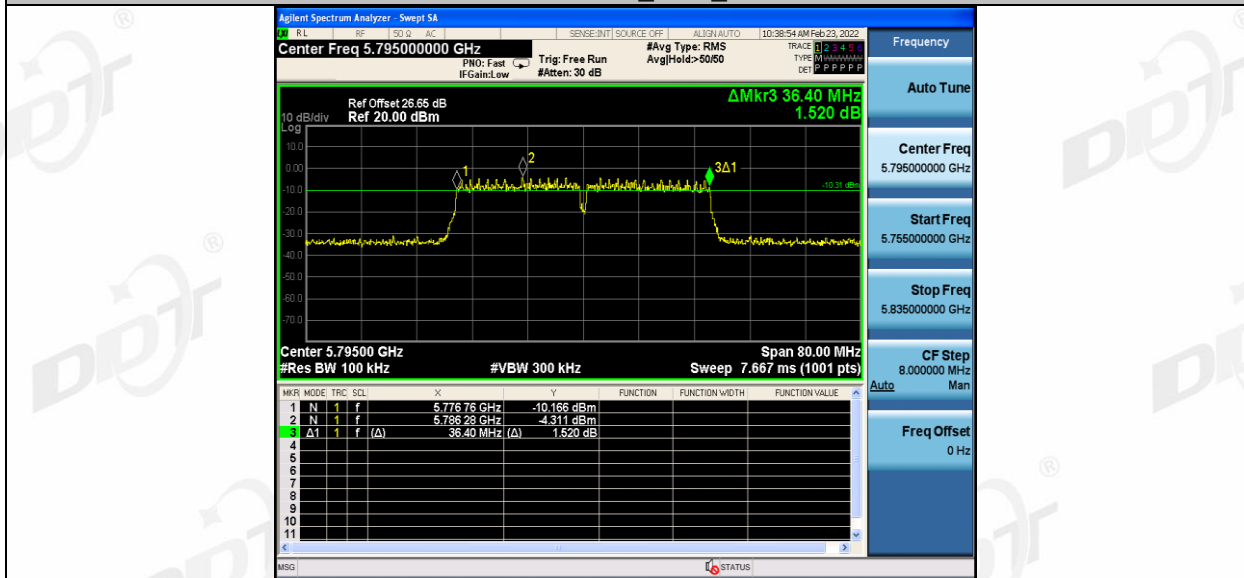


11AC40MIMO_Ant2_5795

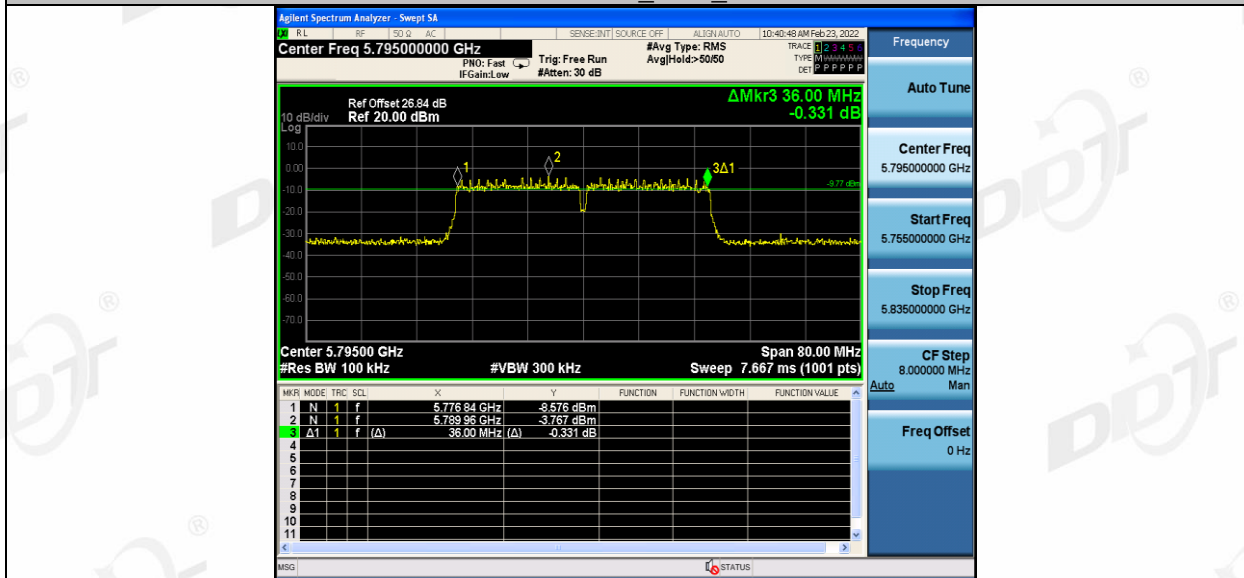

11AC80MIMO_Ant1_5775

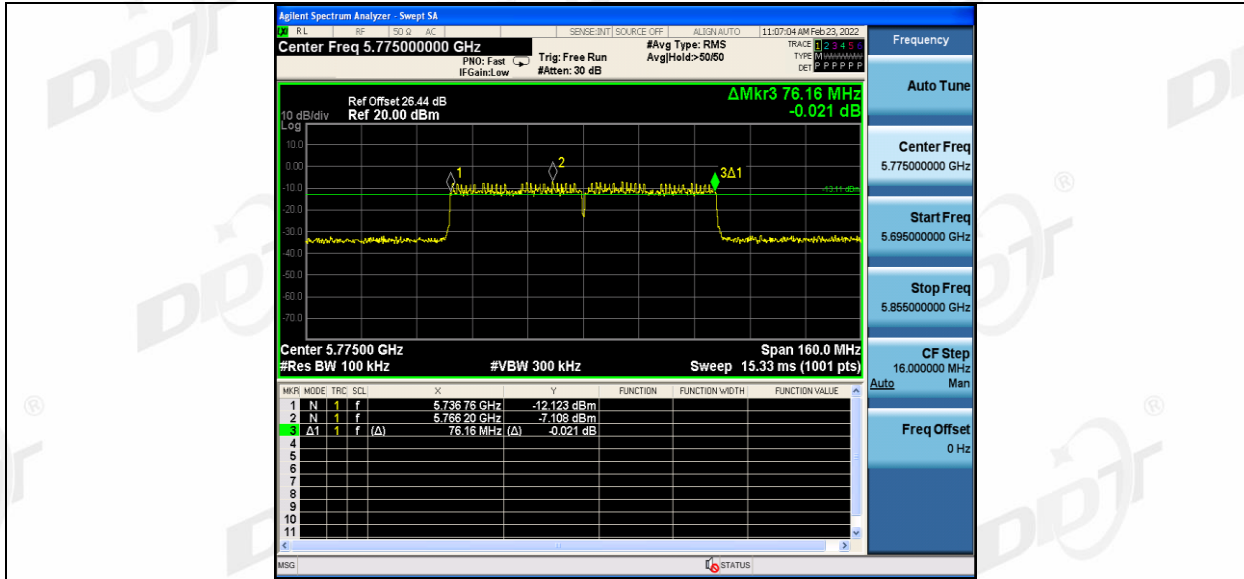

11AC80MIMO_Ant2_5775

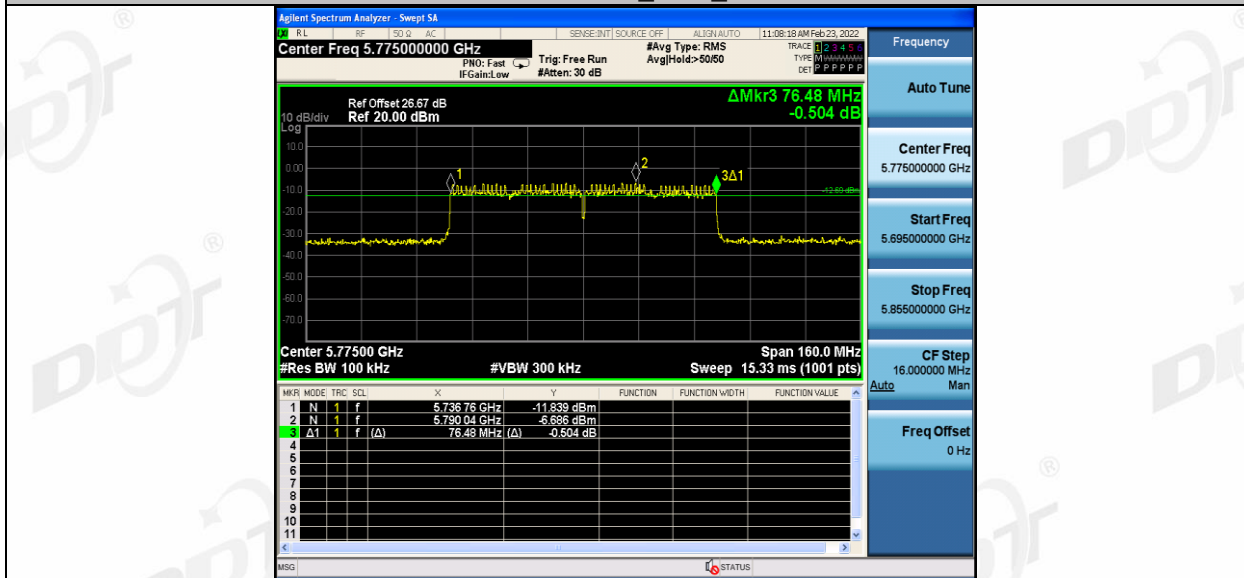

5. Maximum Output Power

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	For FCC client devices: 250 mW (24 dBm)	5150-5250
	For FCC: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, whichever is lower	5250-5350
	For FCC: 250 mW (24 dBm) or $11 + 10 \log_{10} B$, whichever is lower	5470-5725
	1 Watt (30 dBm)	5725-5850
Note: 1. For FCC: B=26 bandwidth. Note: 2. For 802.11n and 802.11ac, the EUT incorporates a MIMO function. The Antenna directional gain is 6.45 dBi. The Output Power limit is the above limits-(6.45-6)		

5.3. Test Procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator

Measure the output power of each antenna port by power sensor.

5.4. Test Result

Test Mode	Ant	Test Channel	Output Power [dBm]	LIMIT [dBm]
11A	ANT1	5180	13.05	24
11A	ANT2	5180	12.34	24
11A	ANT1	5200	12.83	24
11A	ANT2	5200	12.19	24
11A	ANT1	5240	12.73	24
11A	ANT2	5240	12.24	24
11A	ANT1	5260	12.19	24
11A	ANT2	5260	12.01	24
11A	ANT1	5280	12.06	24
11A	ANT2	5280	11.87	24
11A	ANT1	5320	12.27	24
11A	ANT2	5320	11.91	24
11A	ANT1	5500	12.31	24
11A	ANT2	5500	12.05	24
11A	ANT1	5580	11.86	24
11A	ANT2	5580	11.92	24
11A	ANT1	5700	12.09	24
11A	ANT2	5700	11.98	24
11A	ANT1	5745	12.76	30
11A	ANT2	5745	12.36	30
11A	ANT1	5785	12.55	30
11A	ANT2	5785	12.19	30
11A	ANT1	5825	12.44	30
11A	ANT2	5825	11.88	30
11N20MIMO	ANT1	5180	11.16	23.55
11N20MIMO	ANT2	5180	10.34	23.55
11N20MIMO	total	5180	13.78	23.55
11N20MIMO	ANT1	5200	11.00	23.55
11N20MIMO	ANT2	5200	10.50	23.55
11N20MIMO	total	5200	13.77	23.55
11N20MIMO	ANT1	5240	10.93	23.55
11N20MIMO	ANT2	5240	10.51	23.55
11N20MIMO	total	5240	13.74	23.55
11N20MIMO	ANT1	5260	10.52	23.55
11N20MIMO	ANT2	5260	10.52	23.55

11N20MIMO	total	5260	13.53	23.55
11N20MIMO	ANT1	5280	10.74	23.55
11N20MIMO	ANT2	5280	10.67	23.55
11N20MIMO	total	5280	13.72	23.55
11N20MIMO	ANT1	5320	10.74	23.55
11N20MIMO	ANT2	5320	10.65	23.55
11N20MIMO	total	5320	13.71	23.55
11N20MIMO	ANT1	5500	9.88	23.55
11N20MIMO	ANT2	5500	9.69	23.55
11N20MIMO	total	5500	12.80	23.55
11N20MIMO	ANT1	5580	9.61	23.55
11N20MIMO	ANT2	5580	9.45	23.55
11N20MIMO	total	5580	12.54	23.55
11N20MIMO	ANT1	5700	9.50	23.55
11N20MIMO	ANT2	5700	9.71	23.55
11N20MIMO	total	5700	12.62	23.55
11N20MIMO	ANT1	5745	10.54	29.55
11N20MIMO	ANT2	5745	10.17	29.55
11N20MIMO	total	5745	13.37	29.55
11N20MIMO	ANT1	5785	10.47	29.55
11N20MIMO	ANT2	5785	10.09	29.55
11N20MIMO	total	5785	13.29	29.55
11N20MIMO	ANT1	5825	10.16	29.55
11N20MIMO	ANT2	5825	9.84	29.55
11N20MIMO	total	5825	13.01	29.55
11N40MIMO	ANT1	5190	8.70	23.55
11N40MIMO	ANT2	5190	7.73	23.55
11N40MIMO	total	5190	11.25	23.55
11N40MIMO	ANT1	5230	8.50	23.55
11N40MIMO	ANT2	5230	8.17	23.55
11N40MIMO	total	5230	11.35	23.55
11N40MIMO	ANT1	5270	8.37	23.55
11N40MIMO	ANT2	5270	8.42	23.55
11N40MIMO	total	5270	11.41	23.55
11N40MIMO	ANT1	5310	8.28	23.55
11N40MIMO	ANT2	5310	8.21	23.55
11N40MIMO	total	5310	11.26	23.55
11N40MIMO	ANT1	5510	7.75	23.55
11N40MIMO	ANT2	5510	7.84	23.55

11N40MIMO	total	5510	10.81	23.55
11N40MIMO	ANT1	5550	7.48	23.55
11N40MIMO	ANT2	5550	7.85	23.55
11N40MIMO	total	5550	10.68	23.55
11N40MIMO	ANT1	5670	7.39	23.55
11N40MIMO	ANT2	5670	7.28	23.55
11N40MIMO	total	5670	10.35	23.55
11N40MIMO	ANT1	5755	8.28	29.55
11N40MIMO	ANT2	5755	8.45	29.55
11N40MIMO	total	5755	11.38	29.55
11N40MIMO	ANT1	5795	8.18	29.55
11N40MIMO	ANT2	5795	8.27	29.55
11N40MIMO	total	5795	11.24	29.55
11AC20MIMO	ANT1	5180	12.57	23.55
11AC20MIMO	ANT2	5180	11.81	23.55
11AC20MIMO	total	5180	15.22	23.55
11AC20MIMO	ANT1	5200	12.51	23.55
11AC20MIMO	ANT2	5200	12.64	23.55
11AC20MIMO	total	5200	15.59	23.55
11AC20MIMO	ANT1	5240	12.26	23.55
11AC20MIMO	ANT2	5240	12.27	23.55
11AC20MIMO	total	5240	15.28	23.55
11AC20MIMO	ANT1	5260	11.76	23.55
11AC20MIMO	ANT2	5260	11.61	23.55
11AC20MIMO	total	5260	14.70	23.55
11AC20MIMO	ANT1	5280	11.68	23.55
11AC20MIMO	ANT2	5280	11.68	23.55
11AC20MIMO	total	5280	14.69	23.55
11AC20MIMO	ANT1	5320	11.90	23.55
11AC20MIMO	ANT2	5320	11.90	23.55
11AC20MIMO	total	5320	14.91	23.55
11AC20MIMO	ANT1	5500	12.29	23.55
11AC20MIMO	ANT2	5500	12.16	23.55
11AC20MIMO	total	5500	15.24	23.55
11AC20MIMO	ANT1	5580	11.96	23.55
11AC20MIMO	ANT2	5580	11.84	23.55
11AC20MIMO	total	5580	14.91	23.55
11AC20MIMO	ANT1	5700	12.01	23.55
11AC20MIMO	ANT2	5700	12.15	23.55

11AC20MIMO	total	5700	15.09	23.55
11AC20MIMO	ANT1	5745	12.82	29.55
11AC20MIMO	ANT2	5745	12.70	29.55
11AC20MIMO	total	5745	15.77	29.55
11AC20MIMO	ANT1	5785	12.54	29.55
11AC20MIMO	ANT2	5785	12.53	29.55
11AC20MIMO	total	5785	15.55	29.55
11AC20MIMO	ANT1	5825	12.41	29.55
11AC20MIMO	ANT2	5825	12.43	29.55
11AC20MIMO	total	5825	15.43	29.55
11AC40MIMO	ANT1	5190	9.21	23.55
11AC40MIMO	ANT2	5190	9.45	23.55
11AC40MIMO	total	5190	12.34	23.55
11AC40MIMO	ANT1	5230	8.93	23.55
11AC40MIMO	ANT2	5230	8.93	23.55
11AC40MIMO	total	5230	11.94	23.55
11AC40MIMO	ANT1	5270	8.71	23.55
11AC40MIMO	ANT2	5270	8.68	23.55
11AC40MIMO	total	5270	11.71	23.55
11AC40MIMO	ANT1	5310	8.79	23.55
11AC40MIMO	ANT2	5310	8.81	23.55
11AC40MIMO	total	5310	11.81	23.55
11AC40MIMO	ANT1	5510	8.08	23.55
11AC40MIMO	ANT2	5510	8.07	23.55
11AC40MIMO	total	5510	11.09	23.55
11AC40MIMO	ANT1	5550	7.79	23.55
11AC40MIMO	ANT2	5550	8.32	23.55
11AC40MIMO	total	5550	11.07	23.55
11AC40MIMO	ANT1	5670	7.60	23.55
11AC40MIMO	ANT2	5670	7.84	23.55
11AC40MIMO	total	5670	10.73	23.55
11AC40MIMO	ANT1	5755	8.65	29.55
11AC40MIMO	ANT2	5755	8.83	29.55
11AC40MIMO	total	5755	11.75	29.55
11AC40MIMO	ANT1	5795	8.56	29.55
11AC40MIMO	ANT2	5795	8.66	29.55
11AC40MIMO	total	5795	11.62	29.55
11AC80MIMO	ANT1	5210	8.29	23.55
11AC80MIMO	ANT2	5210	7.59	23.55

11AC80MIMO	total	5210	10.96	23.55
11AC80MIMO	ANT1	5290	7.69	23.55
11AC80MIMO	ANT2	5290	7.90	23.55
11AC80MIMO	total	5290	10.81	23.55
11AC80MIMO	ANT1	5530	7.51	23.55
11AC80MIMO	ANT2	5530	7.29	23.55
11AC80MIMO	total	5530	10.41	23.55
11AC80MIMO	ANT1	5610	7.06	23.55
11AC80MIMO	ANT2	5610	7.26	23.55
11AC80MIMO	total	5610	10.17	23.55
11AC80MIMO	ANT1	5775	7.84	29.55
11AC80MIMO	ANT2	5775	8.08	29.55
11AC80MIMO	total	5775	10.97	29.55

6. Power Spectral Density

6.1. Block diagram of test setup

Same with 4.1

6.2. Limits

FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	Other than Mobile and portable:17 dBm/MHz Mobile and portable client devices:11 dBm/MHz	5150-5250
	11 dBm/MHz	5250-5350
	11 dBm/MHz	5470-5725
	30 dBm/500 kHz	5725-5850
Note: For 802.11n and 802.11ac, the EUT incorporates a MIMO function. The Antenna directional gain is 6.45 dBi. The Power Spectral Density limit is the above limits-(6.45-6)		

6.3. Test Procedure

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5150 MHz~5250 MHz, 5250 MHz~5350 MHz, 5470 MHz~5725 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	1MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

5725 MHz-5850 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

6.4. Test Result

Test Mode	Antenna	Freq (MHz)	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11A	Ant1	5180	2.39	≤11.00	Pass
	Ant2	5180	1.59	≤11.00	Pass
	Ant1	5200	1.49	≤11.00	Pass
	Ant2	5200	1.35	≤11.00	Pass
	Ant1	5240	1.84	≤11.00	Pass
	Ant2	5240	2.00	≤11.00	Pass
	Ant1	5260	1.56	≤11.00	Pass
	Ant2	5260	1.30	≤11.00	Pass
	Ant1	5280	1.39	≤11.00	Pass
	Ant2	5280	1.44	≤11.00	Pass
	Ant1	5320	1.21	≤11.00	Pass
	Ant2	5320	1.05	≤11.00	Pass
	Ant1	5500	1.55	≤11.00	Pass
	Ant2	5500	1.71	≤11.00	Pass
	Ant1	5580	1.30	≤11.00	Pass
	Ant2	5580	0.68	≤11.00	Pass
	Ant1	5700	1.26	≤11.00	Pass
	Ant2	5700	1.23	≤11.00	Pass
11N20MIMO	Ant1	5180	1.21	≤10.55	Pass
	Ant2	5180	0.66	≤10.55	Pass
	total	5180	3.95	≤10.55	Pass
	Ant1	5200	1.34	≤10.55	Pass
	Ant2	5200	0.89	≤10.55	Pass
	total	5200	4.13	≤10.55	Pass
	Ant1	5240	1.14	≤10.55	Pass
	Ant2	5240	0.81	≤10.55	Pass
	total	5240	3.99	≤10.55	Pass
	Ant1	5260	1.01	≤10.55	Pass
	Ant2	5260	0.42	≤10.55	Pass
	total	5260	3.74	≤10.55	Pass
	Ant1	5280	0.74	≤10.55	Pass
	Ant2	5280	0.59	≤10.55	Pass
	total	5280	3.68	≤10.55	Pass
	Ant1	5320	1.13	≤10.55	Pass
	Ant2	5320	1.06	≤10.55	Pass
	total	5320	4.11	≤10.55	Pass
	Ant1	5500	0.13	≤10.55	Pass
	Ant2	5500	-0.26	≤10.55	Pass
	total	5500	2.95	≤10.55	Pass
	Ant1	5580	-1.12	≤10.55	Pass
	Ant2	5580	-0.68	≤10.55	Pass
	total	5580	2.12	≤10.55	Pass
Ant1	5700	0.29	≤10.55	Pass	
Ant2	5700	-0.34	≤10.55	Pass	
total	5700	3.00	≤10.55	Pass	
11N40MIMO	Ant1	5190	-3.37	≤10.55	Pass
	Ant2	5190	-4.43	≤10.55	Pass
	total	5190	-0.86	≤10.55	Pass

	Ant1	5230	-4.02	≤10.55	Pass
	Ant2	5230	-3.90	≤10.55	Pass
	total	5230	-0.95	≤10.55	Pass
	Ant1	5270	-1.77	≤10.55	Pass
	Ant2	5270	-1.93	≤10.55	Pass
	total	5270	1.16	≤10.55	Pass
	Ant1	5310	-4.04	≤10.55	Pass
	Ant2	5310	-4.01	≤10.55	Pass
	total	5310	-1.01	≤10.55	Pass
	Ant1	5510	-4.00	≤10.55	Pass
	Ant2	5510	-4.15	≤10.55	Pass
	total	5510	-1.06	≤10.55	Pass
	Ant1	5550	-4.10	≤10.55	Pass
	Ant2	5550	-3.69	≤10.55	Pass
	total	5550	-0.88	≤10.55	Pass
	Ant1	5670	-5.27	≤10.55	Pass
Ant2	5670	-4.96	≤10.55	Pass	
total	5670	-2.10	≤10.55	Pass	
11AC20MIMO	Ant1	5180	2.22	≤10.55	Pass
	Ant2	5180	1.61	≤10.55	Pass
	total	5180	4.94	≤10.55	Pass
	Ant1	5200	1.46	≤10.55	Pass
	Ant2	5200	1.64	≤10.55	Pass
	total	5200	4.56	≤10.55	Pass
	Ant1	5240	1.50	≤10.55	Pass
	Ant2	5240	1.24	≤10.55	Pass
	total	5240	4.38	≤10.55	Pass
	Ant1	5260	0.82	≤10.55	Pass
	Ant2	5260	0.64	≤10.55	Pass
	total	5260	3.74	≤10.55	Pass
	Ant1	5280	0.94	≤10.55	Pass
	Ant2	5280	1.05	≤10.55	Pass
	total	5280	4.01	≤10.55	Pass
	Ant1	5320	0.95	≤10.55	Pass
	Ant2	5320	0.65	≤10.55	Pass
	total	5320	3.81	≤10.55	Pass
	Ant1	5500	1.65	≤10.55	Pass
	Ant2	5500	1.03	≤10.55	Pass
	total	5500	4.36	≤10.55	Pass
	Ant1	5580	0.72	≤10.55	Pass
	Ant2	5580	0.37	≤10.55	Pass
	total	5580	3.56	≤10.55	Pass
Ant1	5700	1.35	≤10.55	Pass	
Ant2	5700	1.37	≤10.55	Pass	
total	5700	4.37	≤10.55	Pass	
11AC40MIMO	Ant1	5190	-3.82	≤10.55	Pass
	Ant2	5190	-3.70	≤10.55	Pass
	total	5190	-0.75	≤10.55	Pass
	Ant1	5230	-3.87	≤10.55	Pass
	Ant2	5230	-4.20	≤10.55	Pass
total	5230	-1.02	≤10.55	Pass	


	Ant1	5270	-3.77	≤10.55	Pass
	Ant2	5270	-4.22	≤10.55	Pass
	total	5270	-0.98	≤10.55	Pass
	Ant1	5310	-4.12	≤10.55	Pass
	Ant2	5310	-3.86	≤10.55	Pass
	total	5310	-0.98	≤10.55	Pass
	Ant1	5510	-4.17	≤10.55	Pass
	Ant2	5510	-4.78	≤10.55	Pass
	total	5510	-1.45	≤10.55	Pass
	Ant1	5550	-5.22	≤10.55	Pass
	Ant2	5550	-3.83	≤10.55	Pass
	total	5550	-1.46	≤10.55	Pass
	Ant1	5670	-5.66	≤10.55	Pass
	Ant2	5670	-5.41	≤10.55	Pass
	total	5670	-2.52	≤10.55	Pass
11AC80MIMO	Ant1	5210	-6.14	≤10.55	Pass
	Ant2	5210	-6.78	≤10.55	Pass
	total	5210	-3.44	≤10.55	Pass
	Ant1	5290	-7.20	≤10.55	Pass
	Ant2	5290	-6.67	≤10.55	Pass
	total	5290	-3.92	≤10.55	Pass
	Ant1	5530	-8.12	≤10.55	Pass
	Ant2	5530	-7.30	≤10.55	Pass
	total	5530	-4.68	≤10.55	Pass
	Ant1	5610	-7.74	≤10.55	Pass
	Ant2	5610	-6.89	≤10.55	Pass
	total	5610	-4.28	≤10.55	Pass

(5725-5850)

Test Mode	Antenna	Freq (MHz)	PSD [dBm/500kHz]	Limit [dBm/500kHz]	Verdict
11A	ANT1	5745	-0.64	≤30.00	Pass
	ANT2	5745	-0.72	≤30.00	Pass
	ANT1	5785	-0.89	≤30.00	Pass
	ANT2	5785	-1.17	≤30.00	Pass
	ANT1	5825	-0.73	≤30.00	Pass
	ANT2	5825	-1.90	≤30.00	Pass
11N20MIMO	ANT1	5745	0.87	≤29.55	Pass
	ANT2	5745	0.5	≤29.55	Pass
	total	5745	3.70	≤29.55	Pass
	ANT1	5785	1.41	≤29.55	Pass
	ANT2	5785	0.16	≤29.55	Pass
	total	5785	3.84	≤29.55	Pass
	ANT1	5825	1.15	≤29.55	Pass
	ANT2	5825	0.56	≤29.55	Pass


	total	5825	3.88	≤29.55	Pass
11N40MIMO	ANT1	5755	-5.61	≤29.55	Pass
	ANT2	5755	-4.87	≤29.55	Pass
	total	5755	-2.21	≤29.55	Pass
	ANT1	5795	-4.68	≤29.55	Pass
	ANT2	5795	-4.60	≤29.55	Pass
	total	5795	-1.63	≤29.55	Pass
11AC20MIMO	ANT1	5745	-0.89	≤29.55	Pass
	ANT2	5745	-1.04	≤29.55	Pass
	total	5745	2.05	≤29.55	Pass
	ANT1	5785	-0.56	≤29.55	Pass
	ANT2	5785	-1.03	≤29.55	Pass
	total	5785	2.22	≤29.55	Pass
	ANT1	5825	-0.50	≤29.55	Pass
	ANT2	5825	-0.84	≤29.55	Pass
	total	5825	2.34	≤29.55	Pass
11AC40MIMO	ANT1	5755	-6.38	≤29.55	Pass
	ANT2	5755	-6.52	≤29.55	Pass
	total	5755	-3.44	≤29.55	Pass
	ANT1	5795	-6.46	≤29.55	Pass
	ANT2	5795	-6.84	≤29.55	Pass
	total	5795	-3.64	≤29.55	Pass
11AC80MIMO	ANT1	5775	-8.33	≤29.55	Pass
	ANT2	5775	-8.00	≤29.55	Pass
	total	5775	-5.15	≤29.55	Pass

6.5. Original test data

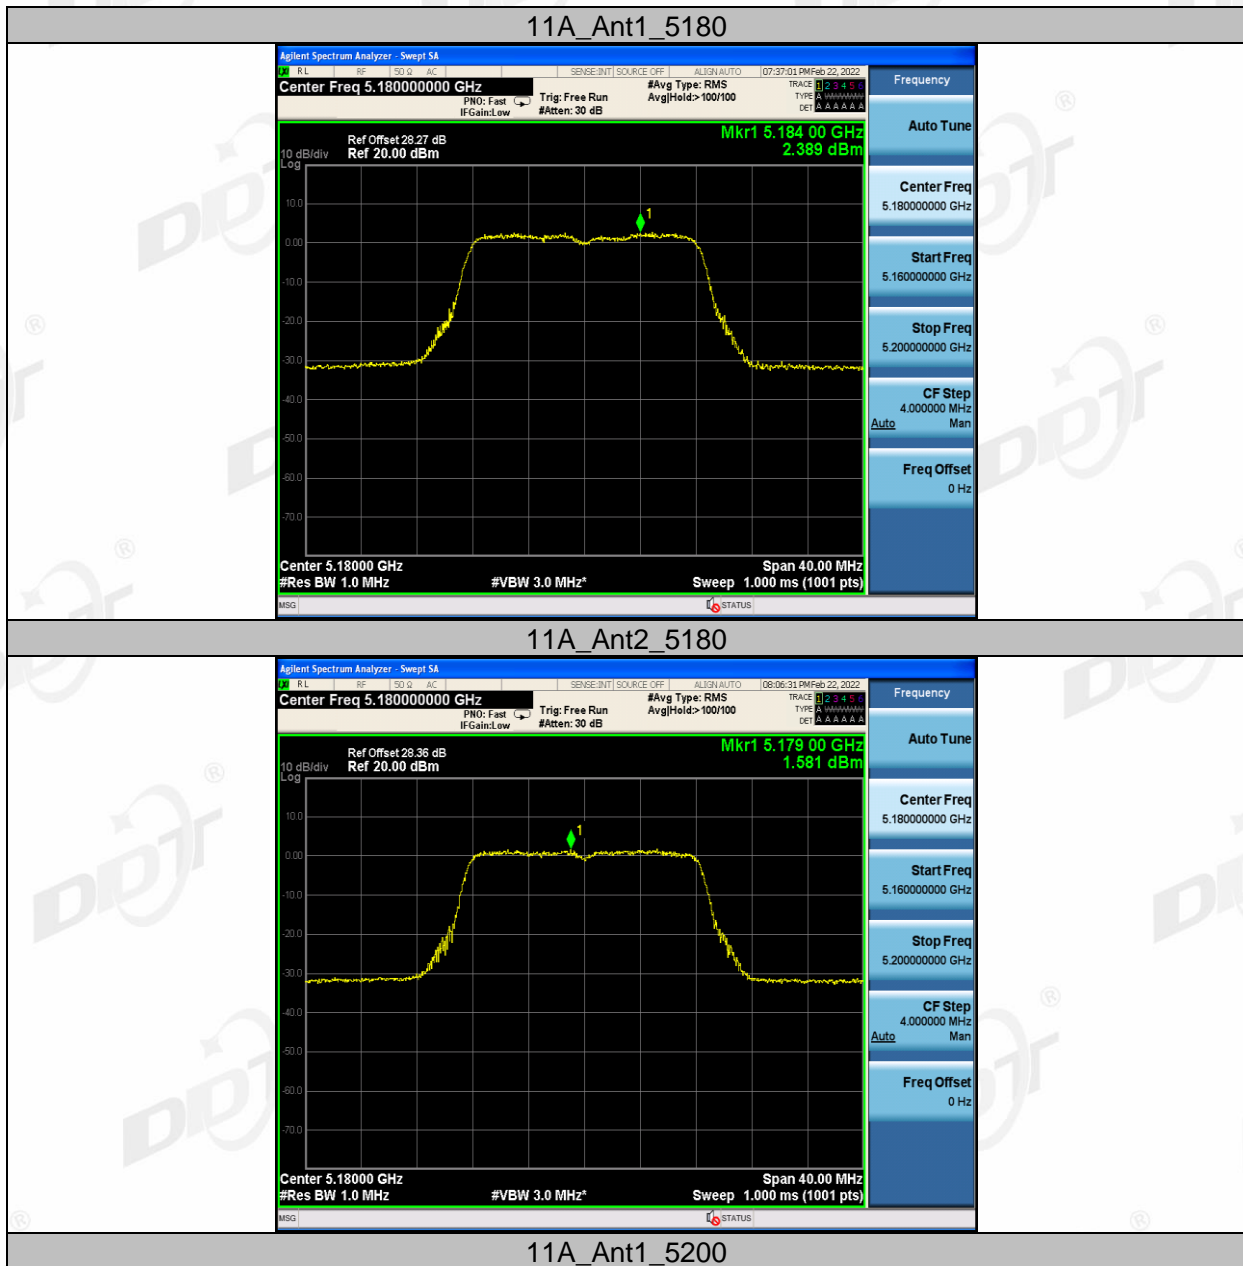



11A_Ant2_5200

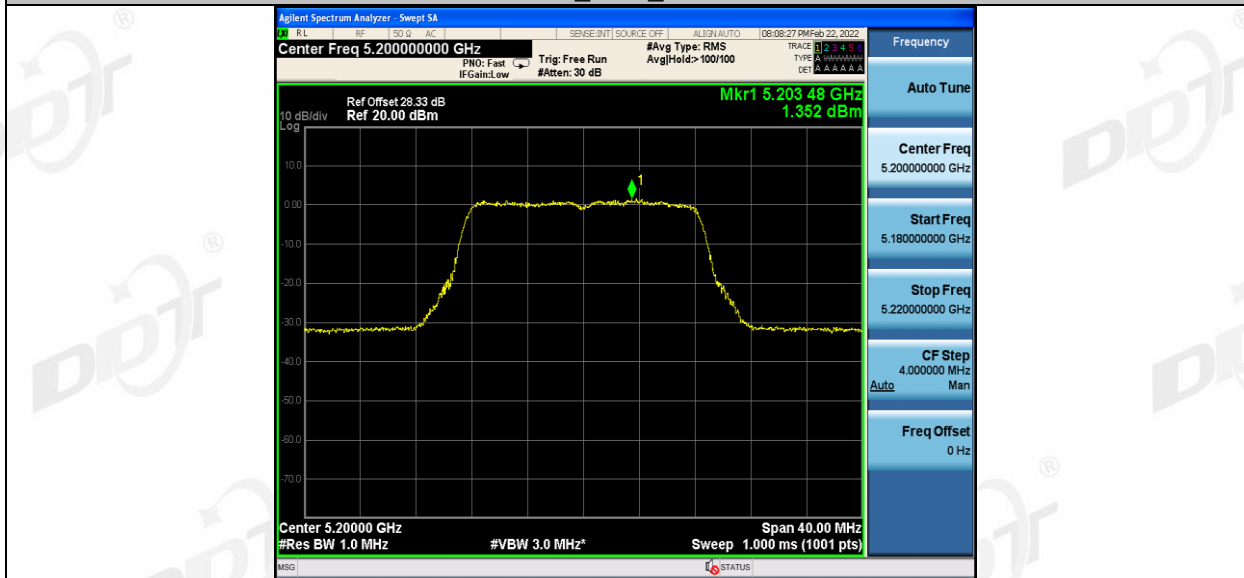

11A_Ant1_5240




11A_Ant2_5240



11A_Ant1_5260




11A_Ant2_5260

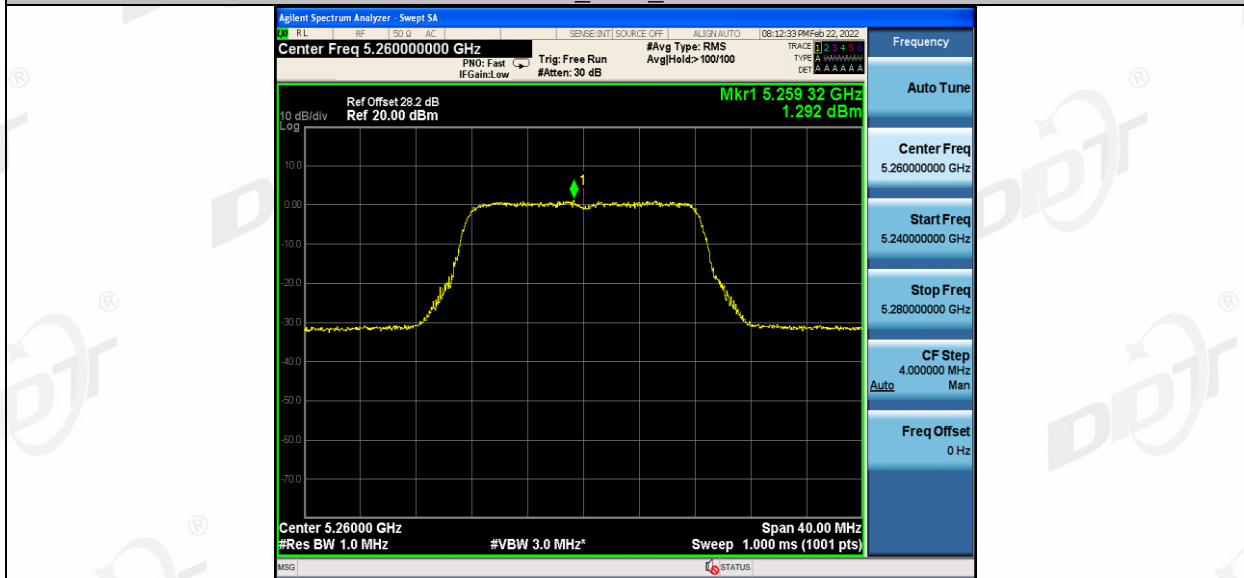

11A_Ant1_5280




11A_Ant2_5280

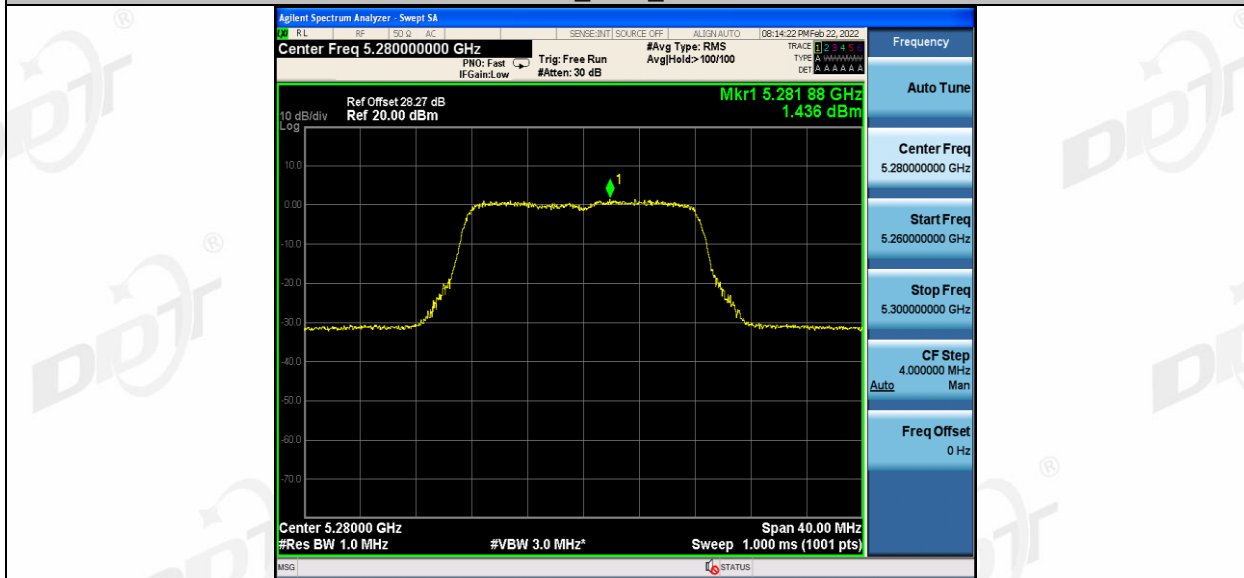


11A_Ant1_5320




11A_Ant2_5320

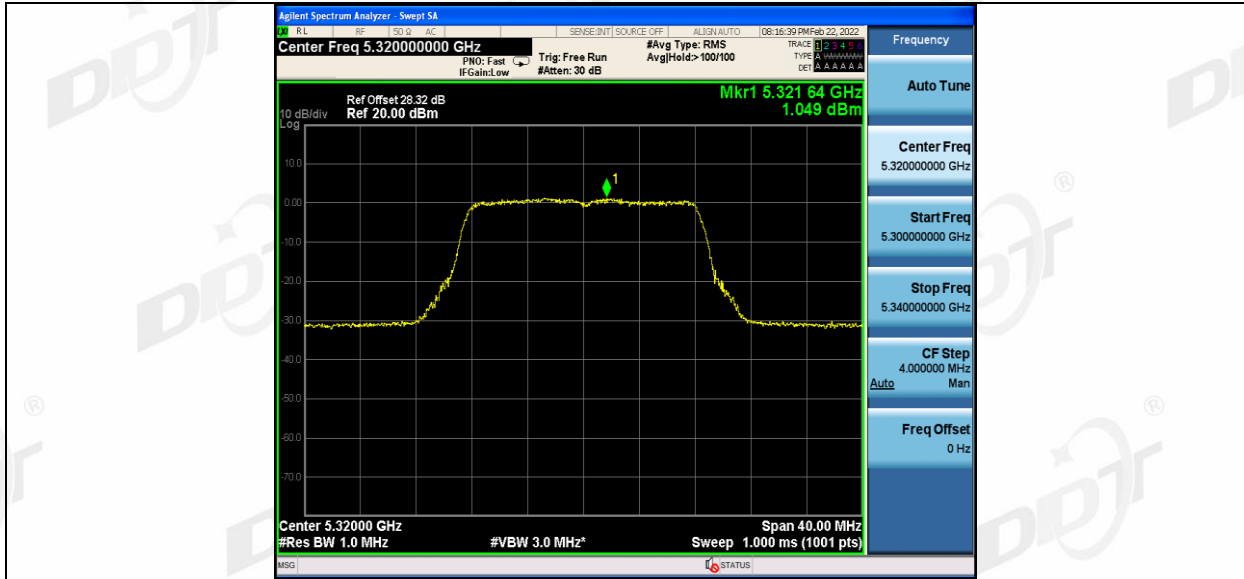


11A_Ant1_5500

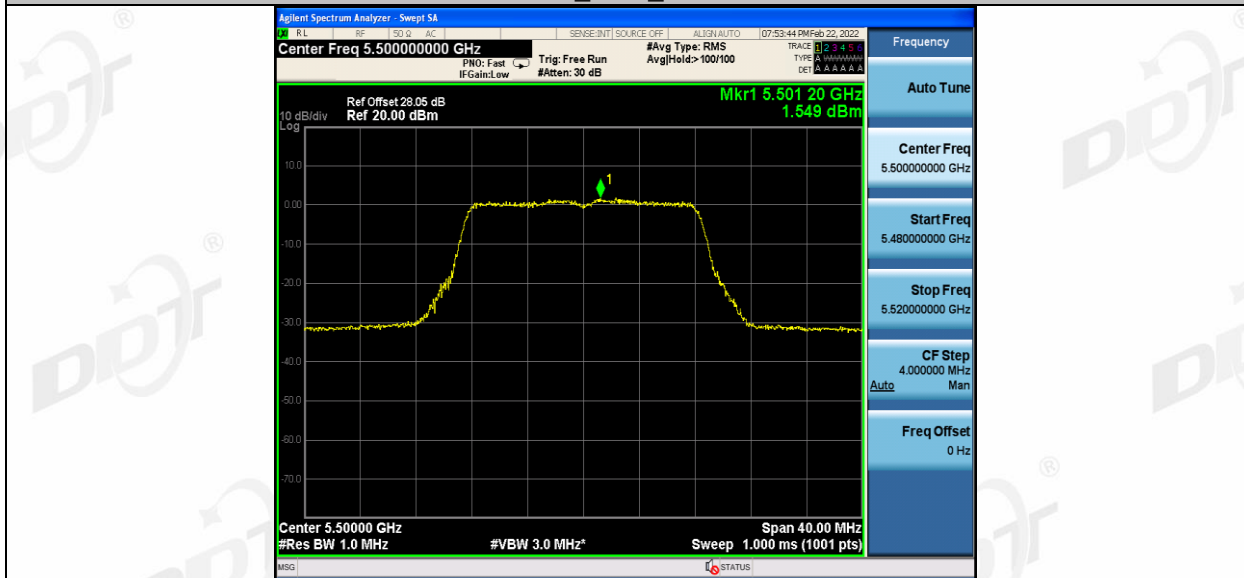

11A_Ant2_5500

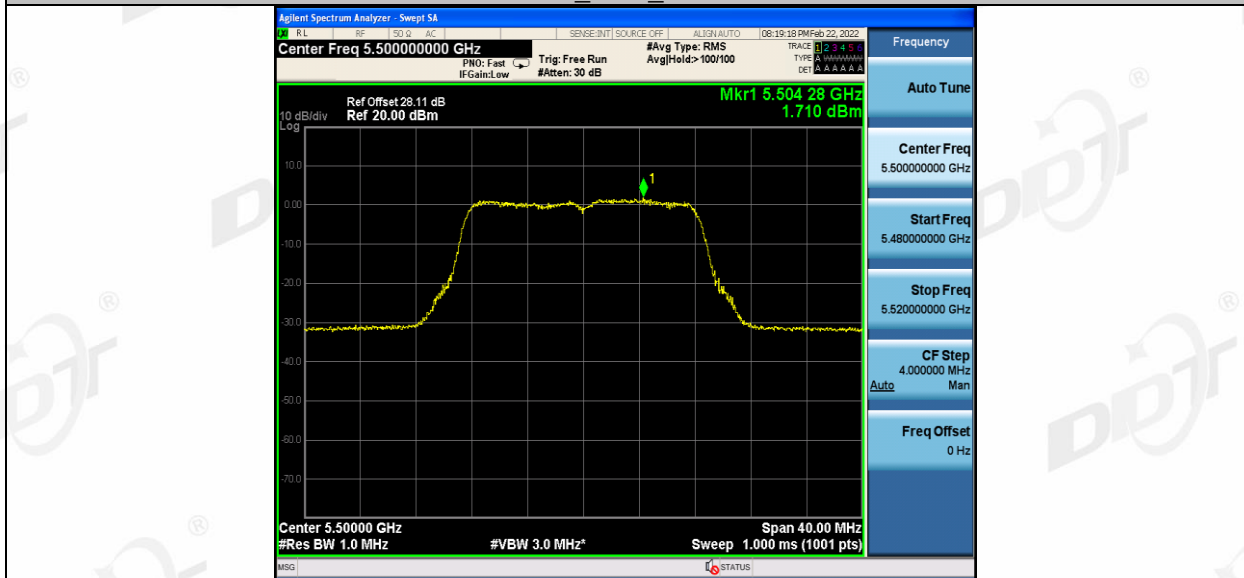


11A_Ant1_5580

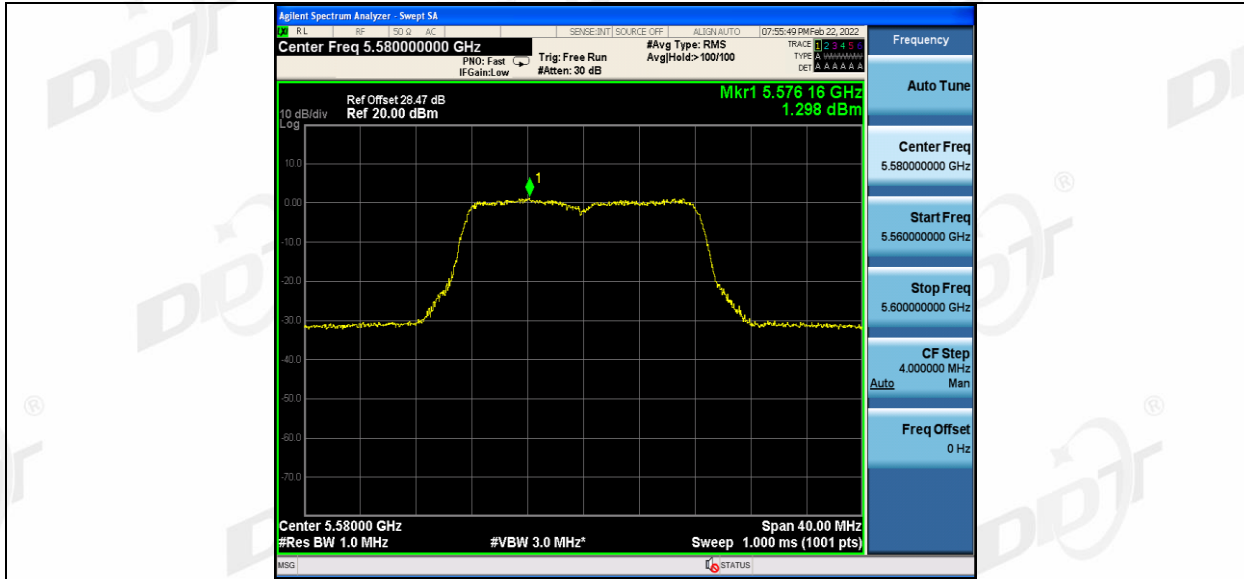


11A_Ant2_5580



11A_Ant1_5700

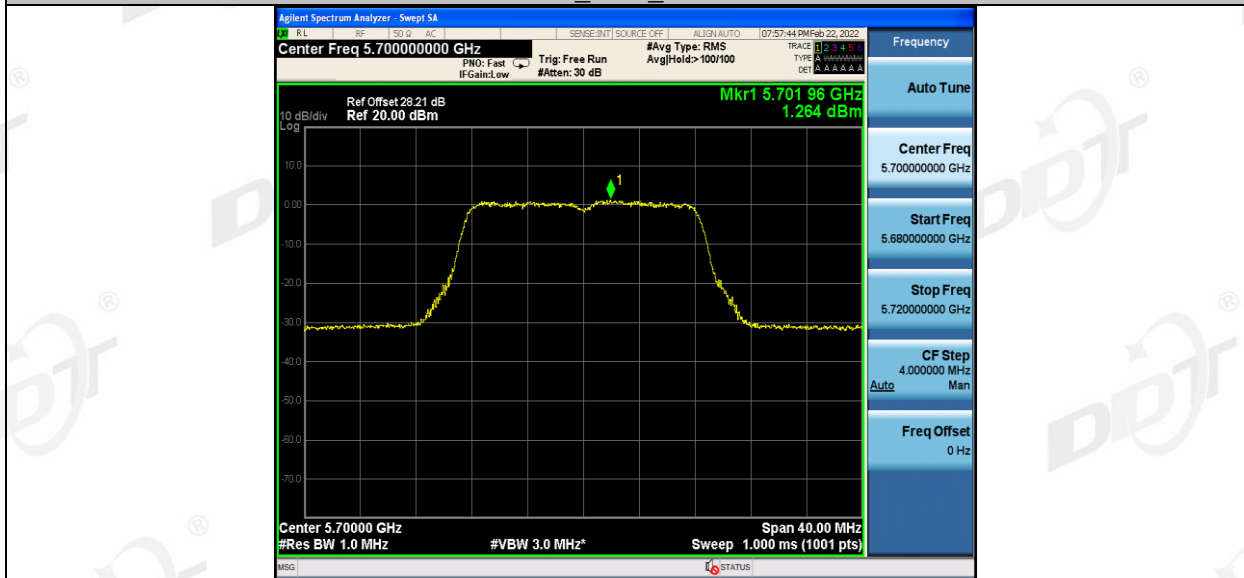

11A_Ant2_5700

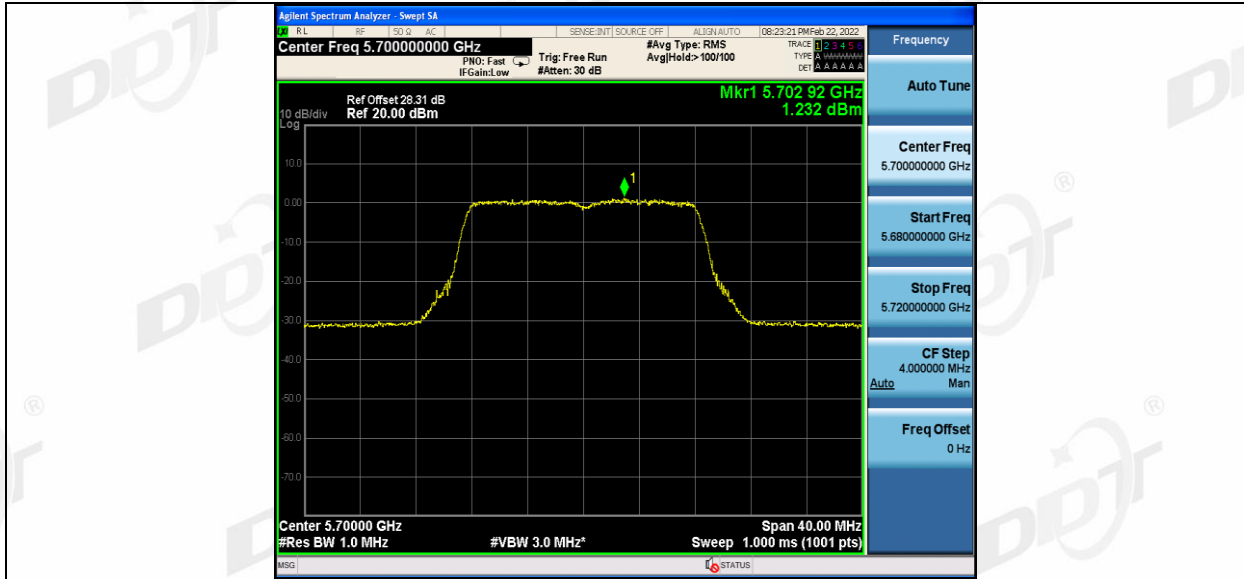

11A_Ant1_5745



11A_Ant2_5745



11A_Ant1_5785



11A_Ant2_5785



11A_Ant1_5825




11A_Ant2_5825



11N20MIMO_Ant1_5180



11N20MIMO_Ant2_5180

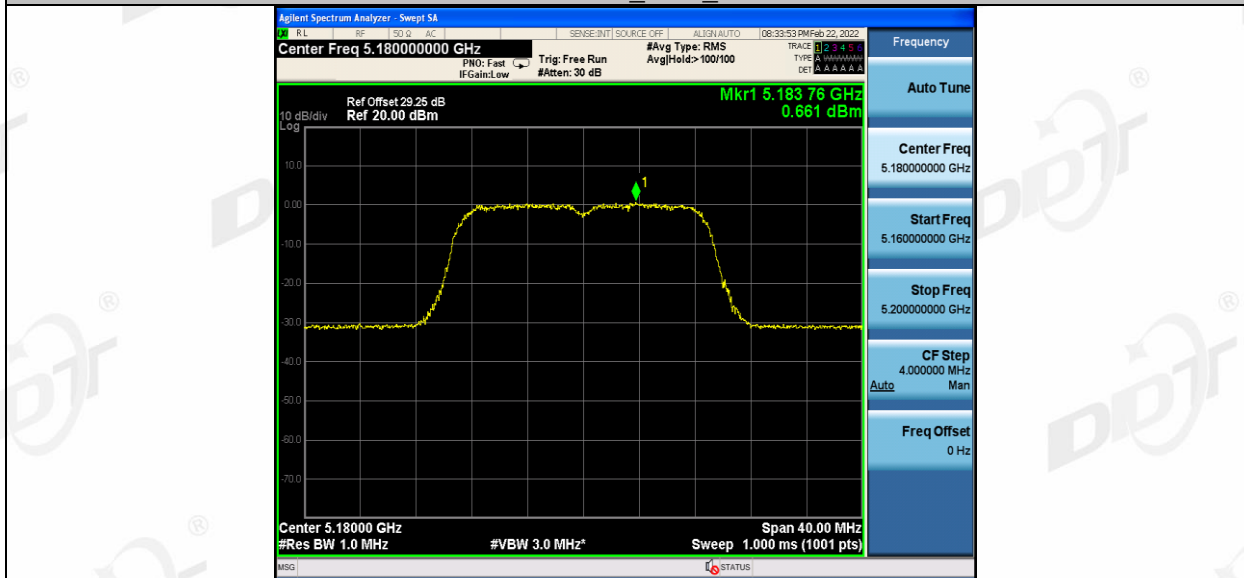

11N20MIMO_Ant1_5200




11N20MIMO_Ant2_5200




11N20MIMO_Ant1_5240



11N20MIMO_Ant2_5240

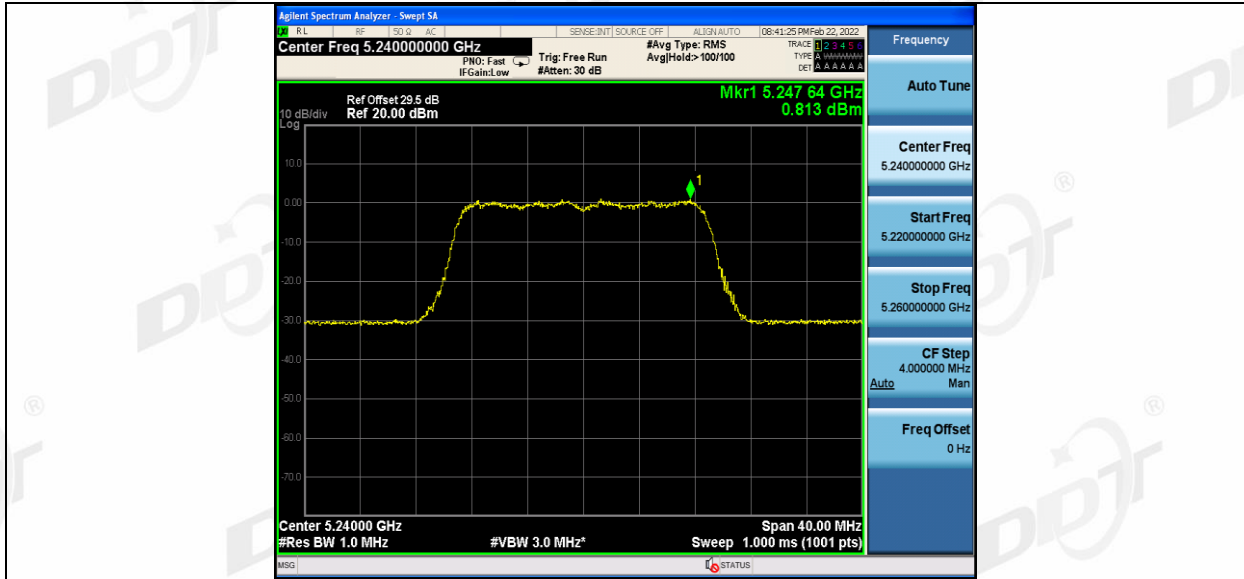

11N20MIMO_Ant1_5260

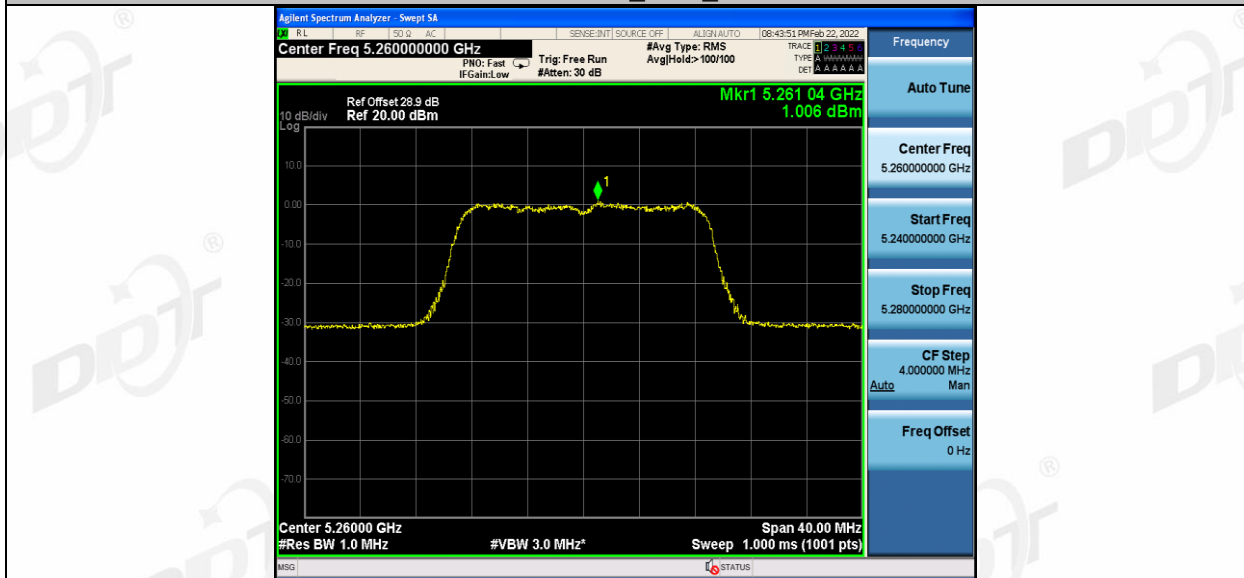

11N20MIMO_Ant2_5260



11N20MIMO_Ant1_5280