

**TEST REPORT**  
**No.: 6-0147-12-19-6a**







According to:  
**FCC Regulations**  
Part 22, Part 24

**IC-Regulations**  
RSS-132 Issue 3  
RSS-133 Issue 6  
RSS-Gen Issue 3

for

**Gemalto M2M GmbH**  
**Wireless Module EHS6**  
(GSM/GPRS/E-GPRS Mode)

**FCC-ID: QIPEHS6**  
**IC-ID: 7830A-EHS6**

Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 Reg. No.: 736496 MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-1 Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2665, R-2666 C-2914, T-1967, G-301
 <b>AUTHORIZED RF LABORATORY</b>	 <b>LAB CODE 20011130-00</b>		
accredited according to DIN EN ISO/IEC 17025			
<p><b>CETECOM GmbH</b> Laboratory Radio Communications &amp; Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com</p>			

## Table of contents

<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>3</b>
1.1. TX mode, tests overview according FCC and Canadian RSS Standards.....	3
1.2. RX mode, tests overview according FCC Part 15B and Canadian RSS Standards .....	4
1.3. Attestation:.....	4
<b>2. ADMINISTRATIVE DATA .....</b>	<b>5</b>
2.1. Identification of the testing laboratory.....	5
2.2. Test location .....	5
2.3. Organizational items .....	5
2.4. Applicant’s details .....	5
2.5. Manufacturer’s details .....	5
<b>3. EQUIPMENT UNDER TEST (EUT).....</b>	<b>6</b>
3.1. TECHNICAL DATA OF EUT DECLARED BY APPLICANT AND SUMMARY OF MEASUREMENTS.....	6
3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....	7
3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions.....	7
3.4. EUT set-ups .....	8
3.5. EUT operating modes .....	9
3.6. Parameter Settings on mobile phone and base station CMU200 .....	10
3.7. Configuration of cables used for testing .....	11
<b>4. DESCRIPTION OF TEST SYSTEM SET-UP’S .....</b>	<b>12</b>
4.1. Test system set-up for conducted measurements at antenna port .....	12
4.2. Test system set-up for radiated spurious emission measurements .....	13
<b>5. MEASUREMENTS .....</b>	<b>14</b>
5.1. RF-Parameter - RF Peak power output radiated .....	14
5.2. RF-Parameter - Radiated out of Band RF emissions and Band Edge .....	16
5.3. RF-Parameter - RF Peak power output conducted.....	18
5.4. RF-Parameter - Occupied bandwidth and emission bandwidth.....	20
5.5. RF-Parameter - Conducted out of Band RF emissions and Band Edge.....	22
5.6. RF-Parameter - Frequency stability on temperature and voltage variations .....	26
5.7. Measurement uncertainties .....	35
<b>6. ABBREVIATIONS USED IN THIS REPORT .....</b>	<b>35</b>
<b>7. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES .....</b>	<b>36</b>
<b>8. INSTRUMENTS AND ANCILLARY.....</b>	<b>37</b>
8.1. Used equipment “CTC” .....	37

## Table of annex

	<b>Total pages</b>
Annex 1: External photographs – document 6-0147-12-19-6-A1	6
Annex 2: Internal photographs – to be supplied by applicant	
Annex 3: Test set-up photographs – document 6-0147-12-19-6-A3	3
Annex 4: Measurement diagrams – document 6-0147-12-19-6a-A4	44

The listed attachments are an integral part of this report.

# 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) supports radiofrequency technologies. This test report shows results for GSM and (E)GPRS technologies only. Other implemented wireless technologies were not considered within this test report.

Following tests have been performed to show compliance with applicable FCC Part 2, Part 22, Subpart H and Part 24, Subpart E (Broadband PCS) of the FCC CFR 47 Rules, Edition October 2012 (e-CFR 47 FCC Rules) and Canada RSS-132 Issue 3, RSS-133 Issue 6, and RSS-Gen Issue 3 standards.

## 1.1. TX mode, tests overview according FCC and Canadian RSS Standards

No. of Diagram group	Test Cases	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	Emissions AC-Power lines conducted (0,15 to 30 MHz)	AC-Power lines	§15.207	RSS-Gen, Issue 3: Chapter 7.2.4	§15.207 limits IC: Table 4, Chapter 7.2.4	--	--	Remark 1.)
2	General field strength emissions radiated - (9 kHz to 30 MHz)	Cabinet + inter-connecting cables (radiated)	§15.209(a)	RSS-Gen, Issue 3: Chapter 4.11 Chapter 7.2.5, Table 5+6	2400/F(kHz) µV/m 24000/F(kHz) µV/m 30 µV/m	--	--	Remark 1.)
7	RF-Power (ERP/EIRP) radiated		§2.1046 §22.913(a)(2) §24.232(c)	RSS-132: 5.4 SRSP-503: 5.1.3  RSS-133:4.1/6.4 SRSP-510: 5.1.2	< 7 Watt (ERP)  < 2 Watt (EIRP)	1	1+3+4+6	passed
8	Spurious emissions radiated (30 MHz to... *tenth-times of the fundamental frequency)		§2.1053(a) §2.1057 §22.917(a)(b) §24.238(a)(b)	RSS-132: 5.5(i)(ii)  RSS-133: 6.5.1(i)(ii)	43+10log(P) dBc	1	1+4	passed
9	Band-Edge compliance					1	1+4	passed
30	RF Power	Antenna terminal	§2.1046	--	N/A	3	1+3+4+6	passed
34	26dB Emission bandwidth		§2.202 §2.1049 §22.917(a) §24.238(a)	RSS-Gen:4.6.1	99% Power	2	1+3+4+6	passed
35	99% Occupied bandwidth							
36	Spurious emissions		§2.1051 §2.1057 §22.917(a)(b) §24.238(a)(b)	RSS-132: 5.5(i)(ii)  RSS-133: 6.5.1(i)(ii)	43+10log(P) dBc	2	1+4 1+3+4+6	passed
37	Band-Edge compliance							
38	Frequency stability		§22.355, table C-1 §24.235 §2.1055(a)(2)	RSS-132: 5.3  RSS-133: 6.3	< ±2.5ppm	2	1+3+4+6	passed

Remarks: 1.) see separate test report for tests according FCC Part 15B and FCC Part15C


**1.2. RX mode, tests overview according FCC Part 15B and Canadian RSS Standards**


No. of Diagram group	Test case	Port	References & Limits			EUT set-up	EUT op-mode	Result
			FCC Standard	RSS Section	Test limit			
1	AC-Power Lines conducted Emissions	AC-Power lines	§15.107 §15.207	RSS-Gen, Issue 3: Chapter 7.2.4	FCC §15.107 class B limits §15.207 limits  RSS-Gen: Table 4, Chapter 7.2.4	--	--	Passed  Remark 1
3	Receiver radiated emissions	Cabinet + Interconnecting cables	§15.109 §15.33 §15.35	RSS-132, Issue 3: 6.6 RSS-Gen, Issue 3: 6.1 RSS 133, Issue 6: 6.6	FCC 15.109 class B limits  RSS-Gen: Table 2, Chapter 6.1	--	--	Passed  Remark 1
50	Receiver conducted Emissions	Antenna terminal	§2.1051	RSS-Gen: 6.2 RSS-132: 5.6 RSS-133: 6.6	IC: < 2 nW (f< 1 GHz) < 5 nW (f> 1 GHz)	--	--	N/A


Remark: 1.) See separate test report 6-0147-12-19-6c for measurements according Part 15, Subpart B/C.

**1.3. Attestation:**

I declare that all measurements were performed by me or under my supervision and that all measurements have been performed and are correct to my best knowledge and belief to Industry Canada standards. All requirements as shown in above table are met in accordance with enumerated standards.

  
.....  
D. Franke  
Responsible for test section



  
.....  
Dipl.-Ing. C. Lorenz  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

Company name:	CETECOM GmbH
Address:	Im Teelbruch 116 45219 Essen - Kettwig Germany
Responsible for testing laboratory:	Dipl.-Ing. Niels Jeß
Deputy:	Dipl.-Ing. Rachid Acharkaoui

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

Company name:	see chapter 2.1. Identification of the testing laboratory
---------------	---

### 2.3. Organizational items

Order No.:	E600147019
Responsible for test report and project leader:	Dipl.-Ing. C. Lorenz
Receipt of EUT:	2012-10-29
Date(s) of test:	2012-10-30 to 2013-04-10
Date of report:	2013-05-06
-----	
Version of template:	12.11 Lorenz

### 2.4. Applicant's details

Applicant's name:	Gemalto M2M GmbH
Address:	Siemensdamm 50  13629 Berlin Germany
Contact person:	Mr. Heike Axel

### 2.5. Manufacturer's details

Manufacturer's name:	same as above
Address:	

### 3. Equipment under test (EUT)

#### 3.1. TECHNICAL DATA OF EUT DECLARED BY APPLICANT AND SUMMARY OF MEASUREMENTS

Main function	Wireless Module		
Type	EHS6		
GSM Frequency range (US/Canada -bands)	GSM 850: 824 – 849 MHz (Uplink), 869-894 MHz (Downlink) GSM1900: 1850-1910 MHz (Uplink), 1930-1990 MHz (Downlink)		
Type of modulation	GSM,GPRS, GMSK EGPRS-Mode: 8-PSK		
Number of channels (USA/Canada -bands)	GSM 850: 128 – 251, 125 channels GSM1900: 512 – 810, 300 channels		
Test Channel frequencies	GSM/E-GPRS 850 MHz Band: Channel 128/192/251 GSM/E-GPRS 1900 MHz Band: Channel 512/661/810		
Emission designator(s)	247KGXW (GSM850) 245KG7W (EDGE850) 247KGXW (GSM1900) 247KG7W (EDGE 1900)		
Antenna Type	<input checked="" type="checkbox"/> Integrated <input type="checkbox"/> External, no RF- connector <input type="checkbox"/> External, separate RF-connector		
Antenna Gain (declared by applicant)	<input checked="" type="checkbox"/> radiated: Max. 2.15 dBi gain at GSM 1900 / FDD 2		
Measured Output Power [dBm]: Conducted GSM850 Conducted EDGE850	Measured: 32.7 (PK) / 32.4 (AV) / 1737.8 mWatt (AV) 30.0 (PK) / 26.9 (AV)		
Measured Output Power: Radiated GSM850 Radiated EDGE850	Measured: 29.1 (PK) / 812.8mWatt 27.8 (PK) / 602.5mWatt		
Measured Output Power: Conducted GSM1900 Conducted EDGE1900	Measured: 29.8 (PK) / 29.7 (AV) / 933.2 mWatt (AV) 28.8 (PK) / 25.8 (AV) / 380mWatt (AV)		
Measured Output Power: Radiated GSM 1900 Radiated EDGE1900	Measured: 28.6 (PK) / 724.4 mWatt 24.8 (PK) / 302 mWatt		
FCC-ID	QIPEHS6		
IC	7830A-EHS6		
Installed options	<input checked="" type="checkbox"/> GSM 900 and GSM 1800 Bands (not usable in USA/Canada) <input checked="" type="checkbox"/> W-CDMA Band I and Band VIII (not usable in USA/Canada) <input checked="" type="checkbox"/> W-LAN, Bluetooth <sup>®</sup> , ANT+ wireless technologies <input type="checkbox"/> battery charging option <input type="checkbox"/> GPS (not tested within this test report) <input type="checkbox"/> FM-Radio (Receiver only)		
Power supply	<input checked="" type="checkbox"/> Internal battery Li-Ion, range 3.5V to 4.1V <input type="checkbox"/> over AC/DC adapter: 120V/60 Hz <input type="checkbox"/> DC power only: 9-12 Volt on DSB75-Adapter Converted to voltage range of 3.3 V to 4.5 V by DSB75-Adapter board		
Special EMI components	--		
Voltage	<input type="checkbox"/> nominal	<input type="checkbox"/> min	<input type="checkbox"/> max
EUT sample type	<input type="checkbox"/> Production	<input type="checkbox"/> Pre-Production	<input type="checkbox"/> Engineering
FCC label attached	<input type="checkbox"/> yes	<input checked="" type="checkbox"/> no	

### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

Short description*)	EUT	Type	S/N serial number	HW hardware status	SW software status
EUT A	Wireless Module	EHS6	004401080840 396	B2 (rev.2)	Rev 01.001
EUT B	Wireless Module	EHS6	004401080840 198	B2 (rev.2)	Rev 01.001
EUT C	Wireless Module	EHS6	004401080846 922	B2 (rev.2)	Rev 01.004

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

AE short description *)	Auxiliary Equipment	Type	S/N serial number	HW hardware status	SW software status
AE 1	SMARTEQ MiniMag-mount antenna	2.6m RG174, SMA-m 0dBd, 824-960 / 1710-2170MHz	59801B	1140.26 SMA	-
AE 2	RS232 cable	2 m	-	-	-
AE 3	DSB75-Adapter	DSB75	-	AH6-DSB75-1	-
AE 4	Handset Votronic	Telephone receiver with RJ11 connector	4017953211 311	HH-SI-30.3/V3.0/0	-
AE 5	USB cable	1m	-	-	-
AE 6	Notebook	DELL D610 D	CTC-PC3	-	Windows XP + Terminal Programm
AE 7	Test adapter	For EUT A/B/C	--	--	--

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

EUT set-up no. *)	Combination of EUT and AE	Remarks
Set. 1	EUT A + AE1 + AE2 + AE3 + AE4 + AE5 + AE6 + AE 7	Radiated tests performed: AT commands set the device into operating mode conditions with help of AE6  AE6 is not connected to the EUT during tests
Set. 2	EUT B + AE2 + AE3 + AE5 + AE6 + AE 7	Conducted tests performed: AT commands set the device into operating mode conditions with help of AE6.
Set. 3	EUT C + AE 2 + AE 3 + AE 6 + AE 7	Conducted output RF-power tests performed. AT commands set the device into operating mode conditions with help of AE6.

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.



### 3.5. EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
op. 1	GSM 850-Voice Traffic channels = 128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 2	GPRS 850 Data Traffic channels = 128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme CS-1 for GMSK modulation, slot 3 active, uplink gamma: 3 (33 dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 3	E-GPRS 850 Data Traffic channels = 128/192/251	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 33 dBm (power class 4; power control level 5). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8PSK modulation, slot 3 active, uplink gamma: 6 (27dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 4	GSM1900-Voice Traffic channels = 512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 5	GPRS 1900 Data Traffic channels = 512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme CS-1 for GMSK modulation, slot 3 active, uplink gamma: 3 (30 dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link
op. 6	E-GPRS 1900 Data traffic channels = 512/661/810	A communication link is established between the mobile station and the test simulator. The transmitter is operated at its maximum rated output power: 30 dBm (power class 1; power control level 0). USF_Duty CYCLE set to 100%, coding scheme MCS-5 for 8-PSK modulation, slot 3 active, uplink gamma: 5 (26 dBm). The input signal to the receiver is modulated with normal test modulation. The wanted RF input signal level to the receiver of the mobile station is set to a level to provide a stable communication link.
op. 7	GSM 850 Idle mode BCCH 50	The mobile station is synchronized to the Broadcast Control Channel (BCCH) and listening to the Common Control Channel (CCCH). Periodic location update is disabled.
op. 8	GSM 1900 Idle mode BCCH 651	The mobile station is synchronized to the Broadcast Control Channel (BCCH) and listening to the Common Control Channel (CCCH).
op. 9	Charging battery	Charging standard battery. This operating mode is combined with other op. modes.

\*) EUT operating mode no. is used to simplify the test report.

### 3.6. Parameter Settings on mobile phone and base station CMU200

Following settings apply to the MS during the measurements in **GSM/(E)GPRS-Mode** only:

Parameter	Traffic Mode	Idle Mode
Traffic Channels mobile station (EUT)	GSM 850: TCH <sub>MS</sub> = 128/ 192 /251 GSM 1900: TCH <sub>MS</sub> = 512 / 661 / 810	--
maximum power level (PCL)	GSM 850: PCL = 5 (2 Watt) GSM 1900: PCL = 0 (1 Watt)	--
Modulation	GSM/GPRS: GMSK-Modulation Scheme EDGE: 8-PSK Modulation Scheme	--
DTX	off	--
Bitstream	PRBS 2E9-1 (pseudo-random-sequence) – CCITT 0.153	
Used Timeslot(s) in Uplink	3	
Hopping	off	
Timeslot (slot mode)	GSM-Mode: single GPRS-Mode: maximum allowed uplink slots no. according MS class	
MS slot class	12	
Maximum data transmission rate, single time slot	GSM: 9,6 kbit/s Slot GPRS: 17,6 kbit/s Slot EDGE: 59,2 kBit/s Slot	
Speech transcoding (Traffic Mode)	Full rate Version 1	
Speed rate	130 Kb/s	
Mode	BCCH and TCH	
BCCH – base station (CMU,CMD)	GSM 850: 182 GSM 1900: 651	
TCH – base station (CMD, CMU)	auto	
Power level TCH – base station (used timeslot level)	- 70 dBm	
Power level BCCH – base station (control channel level)	- 80 dBm	
External attenuation RF/AF-Input/Output	Accord. calibration prior to measurements	
Mobile Country Code	310	310
Domain	PS/ CS	
BS_AG_BLKS_RES	Not applicable	0
Paging reorganisation		Off (0)
Signalling channel		SDCCH
Location Update		Auto
Cell access		Disabled (barred)

#### Settings for CMU (general)

Repetition	Continuous
Stop condition	None
Display mode	Max./Min
Statistic Count	1000 Bursts
Decoder	Standard

Additional settings on the base stations CMU200 for frequency stability measurements



**3.7. Configuration of cables used for testing**

Cable number	Item	Type	S/N serial number	HW hardware status	Cable length
Cable 1	RS232 Port	--	--	--	2.5 m
Cable 2	USB Port	--	--	--	1 m
Cable 3	RJ11 handset line	--	--	--	1.5 m
Cable 4	RF-antenna port	--	--	--	1.5 m

## 4. Description of test system set-up's


### 4.1. Test system set-up for conducted measurements at antenna port

**Specification:** ANSI C63.10-2009

**General Description:** The EUT's RF-signal is coupled out by a suitable antenna coupling connector directly or via test fixture (1). The signal is first attenuated (2) before it is 0° divided by a power divider (3). One of the signal path is connected to the radio communication tester (4), other branch is connected to the spectrum analyzer (5). The specific attenuation losses for all signal paths/branches are determined prior to the measurement within a set-up calibration. These are then taken into account by correcting the measurement readings on the spectrum-analyzer.

For measurements in the climatic chamber, the same equipment and cables are used. The EUT and test fixture are arranged in a climate chamber. The cables are routed through special openings. No additional connectors are needed.

**Schematic:**

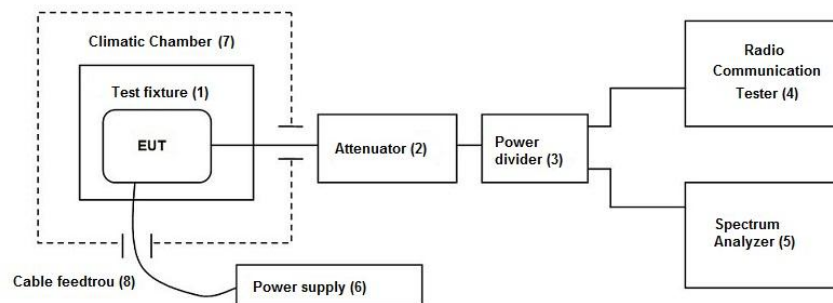


## 4.2. Test system set-up for radiated spurious emission measurements

**Specification:** ANSI C63.4-2009 chapter 8, ANSI C63.10-2009 chapter 6.6

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a CISPR 16-4 compliant fully anechoic room (FAR) recognized by the regulatory commission. The measurement distance was set to 3 meter for frequencies up to 20 GHz and 1 meter above 20 GHz. A logarithmic periodic antenna is used for the frequency range 30 MHz to 20 GHz. From 20 GHz to 40 GHz a horn antenna is used. The antennas are set to fixed antenna height of 1.55 m and the EUT aligned within 3 dB cone of radiation pattern.

**Schematic:**

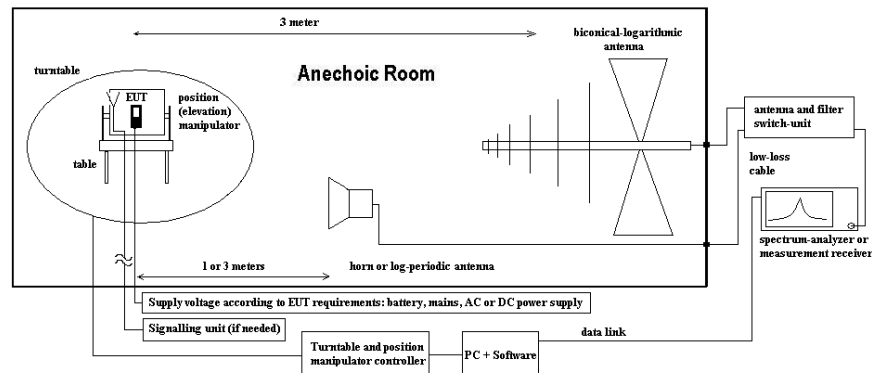

**Testing method:**

### Exploratory, preliminary measurements

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 1.55 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 45°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software. The measurements are performed in horizontal and vertical polarization of the measurement antennas. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

### Final measurement on critical frequencies

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined. Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height is fixed to 1.55 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out. The readings on the spectrum analyzer are corrected with conversion value between field strength and E(I)RP, so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603C/D.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$E_{C_{E(I)RP}} = E_C - 95.2 \text{ dB}$$

$$M = L_T - E_{C_{E(I)RP}}$$

$E_C$  = Electrical field – corrected value

$E_R$  = Receiver reading

$M$  = Margin

$L_T$  = Limit

$AF$  = Antenna factor

$C_L$  = Cable loss

$D_F$  = Distance correction factor (if used)

$G_A$  = Gain of pre-amplifier (if used)

$E_{C_{E(I)RP}}$  = Electrical field corrected for E(I)RP

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. RF-Parameter - RF Peak power output radiated

#### 5.1.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

test location	<input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input checked="" type="checkbox"/> Please see Chapter. 2.2.2	<input checked="" type="checkbox"/> Please see Chapter. 2.2.3			
test site	<input checked="" type="checkbox"/> 441 EMI SAR	<input checked="" type="checkbox"/> 487 SAR NSA	<input checked="" type="checkbox"/> 443 FAR			
receiver	<input checked="" type="checkbox"/> 377 ESCS30	<input checked="" type="checkbox"/> 001 ESS	<input checked="" type="checkbox"/> 489 ESU 40	<input checked="" type="checkbox"/> 620 ESU 26		
spectr. analys.	<input checked="" type="checkbox"/> 584 FSU	<input checked="" type="checkbox"/> 120 FSEM	<input checked="" type="checkbox"/> 264 FSEK	<input checked="" type="checkbox"/>		
antenna	<input checked="" type="checkbox"/> 574 BTA-L	<input checked="" type="checkbox"/> 133 EMCO3115	<input checked="" type="checkbox"/> 302 BBHA9170	<input checked="" type="checkbox"/> 608 HL 562	<input checked="" type="checkbox"/> 549 HL025	
signaling	<input checked="" type="checkbox"/> 392 MT8820A	<input checked="" type="checkbox"/> 436 CMU	<input checked="" type="checkbox"/> 546 CMU200	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
otherwise	<input checked="" type="checkbox"/> 400 FTC40x15E	<input checked="" type="checkbox"/> 401 FTC40x15E	<input checked="" type="checkbox"/> 110 USB LWL	<input checked="" type="checkbox"/> 482 Filter Matrix	<input checked="" type="checkbox"/> 378 RadiSense	
DC power	<input checked="" type="checkbox"/> 456 EA 3013A	<input checked="" type="checkbox"/> 463 HP3245A	<input checked="" type="checkbox"/> 459 EA 2032-50	<input checked="" type="checkbox"/> 268 EA- 3050	<input checked="" type="checkbox"/> 494 AG6632A	<input checked="" type="checkbox"/> 498 NGPE 40
line voltage	<input checked="" type="checkbox"/> 230 V 50 Hz via public mains		<input checked="" type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000			

#### 5.1.2. Requirements and limits

<b>FCC</b>	§2.1046(a)
<b>IC</b>	RSS-132: Issue 3 : 5.4 + SRSP 503 :5.1.3 for GSM 850; RSS-133: Issue 6 4.1/6.4 + SRSP-510 :5.1.2 for GSM 1900
<b>Limit</b>	Maximum E(I)RP of the mobile phone should be determined.
	Limit GSM850: 7 Watt ERP (38.4 dBm)
	Limit GSM1900: 2 Watt EIRP (33.0 dBm)

#### 5.1.3. Test condition and test set-up

link to test system (if used):		<input checked="" type="checkbox"/> air link	<input checked="" type="checkbox"/> cable connection	<input type="checkbox"/>
EUT-grounding		<input checked="" type="checkbox"/> none	<input checked="" type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up		<input checked="" type="checkbox"/> table top		<input type="checkbox"/> floor standing
Climatic conditions		Temperature: (22±3°C)		Rel. humidity: (40±20)%
Test system set-up		Please see chapter "Test system set-up for radiated spurious emission measurements up to 20 GHz"		
Spectrum Analyzer Settings	<b>Parameter:</b>	Spectrum analyser mode		
	Scan Mode	20 MHz		
	Span	3 MHz		
	RBW	10 MHz		
	VBW	Coupled		
	Sweep time	repetitive		
	Sweep mode	Peak		
	Detector			
Measurement method	<p>The measurements were performed by using the <b>substitution method</b> (ANSI/TIA/EIA 603C/D) with a spectrum-analyzer. This method can be described like follows:</p> <ol style="list-style-type: none"> <li>1. choosing of suitable spectrum-analyzer settings for performing the measurements. This settings of the spectrum analyzer must be maintained for both stages of the measurements: EUT emission measurements and also for measurements of the substituted level.</li> <li>2. The maximum level of the peak power was recorded, while the emissions were maximized by rotating the EUT in three orthogonal axes, which was situated on a non-conductive turntable of 1.55 m height (<math>P_{MEAS,1}</math>). This was performed for both measuring antenna polarisations (vertical/horizontal), the maximum of both values is used for further measurements and final substitution (<math>P_{MEAS,1,MAX}</math>).</li> <li>3. As the maximum emission is recorded, the EUT is replaced by a frequency dependant suitable antenna, which is connected to a RF-signal generator, which is transmitting on the determined worst-case frequency as determined in step 2.</li> <li>4. The RF-signal level of the signal generator is adjusted as long the same worst-case level determined first step is measured at the spectrum analyzer (<math>P_{SMHU}=P_{MEAS,1,MAX}</math>)</li> <li>5. Than the RF-signal cable is disconnected from the antenna and connected to a power-level meter. The level is determined (<math>P_{MEAS,2}</math>).</li> <li>6. The final result is calculated by adding the ERP/EIRP gain of the antenna which substitutes the EUT. <math>P_{EUT,SUBST} = P_{MEAS,2} + G_{ANTENNA}</math></li> </ol>			
Mobile phone settings	<p>A call was established with settings according chapter "Parameter settings on mobile phone and base station CMU200"</p> <p>UE Power should be set to maximum, continuous transmission. DTX or other power saving techniques have been disabled</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.</p>			

**5.1.4. Measurement results**

**5.1.4.1. GSM 850 results**

Operating Mode	Carrier Channel		Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	No.	PK	AV	ERP-Value		
GSM 850	Low	128	29.1	1.)	ERP-Value	V	passed
	Middle	192	28.6				
	High	251	27.2				
E-GPRS 850	Low	128	26.3	1.)	ERP-Value	H	passed
	Middle	192	27.3				
	High	251	27.8				

Remark: 1.) see conducted measurements for PAR factor

**5.1.4.2. GSM 1900 results**

Operating Mode	Carrier Channel		Peak Output Power [dBm]			Antenna Polarisation for maximum Power	Result
	Range	No.	PK	AV	EIRP-Value		
GSM 1900	Low	512	28.0	1.)	EIRP-Value	V	passed
	Middle	661	27.9				
	High	810	28.6				
E-GPRS 1900	Low	512	24.8	1.)	EIRP-Value	V	passed
	Middle	661	24.2				
	High	810	22.1				

Remark: 1.) see conducted measurements for PAR factor

## 5.2. RF-Parameter - Radiated out of Band RF emissions and Band Edge

### 5.2.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	<input type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)	<input type="checkbox"/> Please see Chapter. 2.2.2	<input type="checkbox"/> Please see Chapter. 2.2.3			
test site	<input type="checkbox"/> 441 EMI SAR	<input type="checkbox"/> 487 SAR NSA	<input type="checkbox"/> 443 FAR	<input type="checkbox"/> 347 Radio.lab.1	<input type="checkbox"/> Radio.lab.2	
receiver	<input type="checkbox"/> 377 ESCS30	<input type="checkbox"/> 001 ESS	<input type="checkbox"/> 489 ESU 40	<input type="checkbox"/> 620 ESU 26		
spectr. analys.	<input type="checkbox"/> 584 FSU	<input type="checkbox"/> 120 FSEM	<input type="checkbox"/> 264 FSEK			
antenna	<input type="checkbox"/> 608 HL 562	<input type="checkbox"/> 549 HL 025	<input type="checkbox"/> 302 BBHA9170	<input type="checkbox"/> 289 CBL 6141	<input type="checkbox"/> 030 HFH-Z2	<input type="checkbox"/> 477 GPS
signaling	<input type="checkbox"/> 017 CMD 65	<input type="checkbox"/> 323 CMD 55	<input type="checkbox"/> 340 CMD 55			
signaling	<input type="checkbox"/> 392 MT8820A	<input type="checkbox"/> 546 CMU 200	<input type="checkbox"/> 547 CMU			
power supply	<input type="checkbox"/> 463 HP3245A	<input type="checkbox"/> 457 EA 3013A	<input type="checkbox"/> 459 EA 2032-50	<input type="checkbox"/> 268 EA- 3050	<input type="checkbox"/> 494 AG6632A	<input type="checkbox"/> 498 NGPE 40
otherwise	<input type="checkbox"/> 529 6dB divider	<input type="checkbox"/> 530 6dB Att.	<input type="checkbox"/> 110 USB LWL	<input type="checkbox"/> 482 Filter Matrix	<input type="checkbox"/> 431 Near field	
line voltage	<input type="checkbox"/> 230 V 50 Hz via public mains		<input type="checkbox"/> 060 110 V/ 60 Hz via PAS 5000			

### 5.2.2. Requirements and limits

FCC	§2.1053(a), §2.1057(a)(1), §22.917(a)(b), §24.238(a)(b)
IC	RSS-132, Issue 3: 5.5, RSS-133, Issue 6: 6.5.1
Limit	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limit: -13dBm

### 5.2.3. Test condition and test set-up

link to test system (if used):	<input type="checkbox"/> air link	<input type="checkbox"/> cable connection	
EUT-grounding	<input type="checkbox"/> none	<input type="checkbox"/> with power supply	<input type="checkbox"/> additional connection
Equipment set up	<input type="checkbox"/> table top	<input type="checkbox"/> floor standing	
Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%	
Test system set-up	Please see chapter “Test system set-up for radiated spurious emission measurements up to 20 GHz”		
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the block-edge where a AVERAGE detector applied.  According chapter “Test system set-up for electric field measurement in the range 30-1000MHz and 1 to 40GHz” and additionally: the readings on the spectrum analyzer are corrected with annually performed chamber path calibration values so the readings shown are equivalent to ERP/EIRP values. Critical measurements near the limit are re-measured with a substitution method accord. ANSI/TIA/EIA 603.		
Mobile phone settings	A call was established with settings according chapter “Parameter settings on mobile phone and base station CMU200”  The UE and used accessories (if any used) were set to work according their intended use/specification stated as by the applicant  The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.		

### Spectrum-Analyzer settings for GSM/GPRS/E-GPRS 850 Mode

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 2 (subrange 2)	1000	2800	1	1	15	10	MaxH-PK
Sweep 3 (subrange 3)	2800	9000	1	1	60	10	MaxH-PK
Sweep 4a (Block-Edge)	823	824	0.003	0.01	30	10	MaxH-PK
Sweep 4b (Block-Edge)	849	850	0.003	0.01	30	10	MaxH-PK



**Spectrum-analyzer settings for GSM/GPRS/E-GPRS 1900 Mode**

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	30	1000	1	1	10	10	MaxH-PK
Sweep 2 (subrange 2)	1000	2800	1	1	15	10	MaxH-PK
Sweep 3 (subrange 3)	2800	20000	1	1	160	10	MaxH-PK
Sweep 4a (Block-Edge)	1849	1850	0.003	0.01	30	10	MaxH-PK
Sweep 4b (Block-Edge)	1910	1911	0.003	0.01	30	10	MaxH-AV

**5.2.4. Measurement results**

The results are presented below in summary form only. For more information please see each diagram enclosed in annex 4.

**5.2.4.1. GSM 850: Set-up 1**

Dia-gram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.01_RSE_R_Ch128_GSM	Low	128	30 MHz – 9 GHz	1	Carrier on diagram, not relevant for results				passed
9.01_RSE_R_Ch128_GSM	Low		823 – 824 MHz		Band Edge Compliance				passed
8.02_RSE_R_Ch192_GSM	Middle	192	30 MHz – 9 GHz		Carrier on diagram, not relevant for results				passed
8.03_RSE_R_Ch251_GSM	High	251	30 MHz – 9 GHz		Carrier on diagram, not relevant for results				passed
9.02_RSE_R_Ch251_GSM	High		849 – 850 MHz		Band-Edge compliance				passed

Remark:--

**5.2.4.2. GSM 1900: Set-up 1**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
8.10_RSE_R_Ch512_GSM	Low	512	30 MHz – 20 GHz	4	Carrier on diagram, not relevant for results				passed
9.07_RSE_R_Ch512_GSM	Low		1849 – 1850 MHz		Band Edge Compliance				passed
8.11_RSE_R_Ch661_GSM	Middle	661	30 MHz – 20 GHz		Carrier on diagram, not relevant for results				passed
8.12_RSE_R_Ch810_GSM	High	810	30 MHz – 20 GHz		Carrier on diagram, not relevant for results				passed
9.08_RSE_R_Ch810_GSM	High		1910 – 1911 MHz		Band-Edge compliance				passed

Remark:--

### 5.3. RF-Parameter - RF Peak power output conducted

#### 5.3.1. Test location and equipments

test location	CETECOM Essen (Chapter. 2.2.1)		Please see Chapter. 2.2.2			
test site	347 Radio.lab. 1	Radio.lab. 2				
spectr. analys.	584 FSU	489 ESU 40	264 FSEK	620 ESU 26		
signaling	392 MT8820A	436 CMU200	547 CMU200			
otherwise	110 USB LWL					
DC power	456 EA 3013A	463 HP3245A	459 EA 2032-50	268 EA- 3050	494 AG6632A	498 NGPE 40
otherwise	331 HC 4055	248 6 dB Att.	530 10dB Att.	- cable OTA20		
line voltage	230 V 50 Hz via public mains		060 110 V/ 60 Hz via PAS 5000			

#### 5.3.2. Requirements and limits

<b>FCC</b>	§2.1046(a)
<b>IC</b>	RSS-132;: Issue 3 : 5.4 + SRSP 503 :5.1.3 for GSM 850; RSS-133: Issue 6 4.1/6.4 + SRSP-510 :5.1.2 for GSM 1900
<b>Limit</b>	Maximum conducted output power of the transmitter should be determined while measured on RF output terminal.
	Limit GSM850: 7 Watt (38.4 dBm)
	Limit GSM1900: 2 Watt (33.0 dBm)

#### 5.3.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter "Test system set-up for conducted measurements on antenna port"	
Measurement method	<p>The measurements were performed with the integrated power measurement function of the „radio communication tester CMU200 from Rohde&amp;Schwarz company. In this way spectrum-analyzers instrument limitations can be avoided or minimized. Instead, CMU manufacturers declared measurement error can be considered for this measurement.</p> <p>The attenuation (insertion loss) at the RF Inputs/Outputs of CMU were set according the path loss of the test set-up, determined in a step before starting the measurements. A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)</p> <p>Peak and Average Values have been recorded for each channel and band.</p>	
Mobile phone settings	<p>A call was established with settings according chapter "Parameter settings on mobile phone and base station CMU200"</p> <p>UE Power should be set to maximum, continuous transmission. DTX or other power saving techniques have been disabled</p> <p>The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.</p>	

**5.3.4. Measurement results**

**Op. Mode 1, Set-up 3**

Op. Mode	Carrier Channel		Peak Output Power [dBm]	Average Output Power [dBm]	Limit [dBm]	Result
	Range	No.				
GSM 850	Low	128	32.4	32.3	38.4	Passed
	Middle	192	32.7	32.4		
	High	251	32.5	32.4		

**Op. Mode 3, Set-up 3**

Op. Mode	Carrier Channel		Peak Output Power [dBm]	Average Output Power [dBm]	Limit [dBm]	Result
	Range	No.				
E-GPRS 850	Low	128	29.9	26.8	38.4	Passed
	Middle	192	30.0	26.9		
	High	251	30.0	26.9		

**Op. Mode 4, Set-up 3**

Op. Mode	Carrier Channel		Peak Output Power [dBm]	Average Output Power [dBm]	Limit [dBm]	Result
	Range	No.				
GSM 1900	Low	512	29.8	29.7	33.0	Passed
	Middle	661	29.7	29.6		
	High	810	29.8	29.6		

**Op. Mode 6, Set-up 3**

Op. Mode	Carrier Channel		Peak Output Power [dBm]	Average Output Power [dBm]	Limit [dBm]	Result
	Range	No.				
E-GPRS 1900	Low	512	28.8	25.8	33.0	Passed
	Middle	661	28.8	25.7		
	High	810	28.8	25.7		

## 5.4. RF-Parameter - Occupied bandwidth and emission bandwidth

### 5.4.1. Test location and equipments

(for reference numbers please see chapter 'List of test equipment')					
test site	347 Radio.lab. 1	489 Radio.lab. 2	264 FSEK	620 ESU26	
spectr. analys.	584 FSU	489 ESU40	264 FSEK	620 ESU26	
signaling	392 MT8820A	436 CMU	547 CMU		
DC Power	463 HP3245A	087 EA3013	354 NGPE 40	086 LNG50-10	
otherwise	529 6dB divider	530 10dB Att.	431 Near field		
line voltage	230 V 50 Hz via public mains		060 110 V/ 60 Hz via PAS 5000		

### 5.4.2. Requirements and Limits

FCC	§2.202(a), §2.1049, §22.917(b), §24.238(b)	„the <b>occupied bandwidth</b> is the frequency bandwidth, such that, below it lower and above it upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated”
IC	RSS-Gen, Issue 3: §4.6.1 & 4.6.3	
ANSI	C63.10-2009	

### 5.4.3. Test condition and test set-up

Climatic conditions		Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up		Please see chapter “Test system set-up for conducted measurements at antenna port”	
Spectrum Analyzer Settings	Parameter	Occupied bandwidth:	Emission bandwidth
	Scan Mode Span RBW VBW Sweep time Sweep mode Detector	Spectrum analyser mode 7.5 MHz 3 kHz 30 kHz Coupled Repetitive, max-hold PK	Spectrum analyser mode 7.5 MHz 3 kHz 30 kHz Coupled single RMS
Measurement method		The used spectrum analyzer FSE or ESU from Rohde & Schwarz contains an integrated function to calculate the occupied bandwidth automatically. From left and right display margin, the upper and lower frequency points where the accumulated power becomes 0.5% of the total power, are calculated. Subtracting the previous determined two frequency points, yields the occupied bandwidth.	Bandwidth defined between 2 markers with are 26dBc compared to highest In-Band Peak Emission.
Mobile phone settings		Provisions with the requirements is based on the fact, that GSM modulation scheme is GMSK Modulation for GSM equipment with a maximum data transmission rate of 17,6 kBit/s per Slot. Provisions with the requirements is based on the fact, that EDGE modulation scheme is 8-PSK Modulation for EDGE equipment with a maximum data transmission rate of 69,2 kBit/s per Slot. A call was established with settings according chapter “Parameter settings on mobile phone and base station CMU200”	

**5.4.4. Measurement results**

Operating mode/band Set-up	Carrier Channel		Occupied 99% bandwidth [kHz]	26 dBc Emission bandwidth [kHz]
	Range	No.		
<b>Set-up 1, Op-Mode 1</b>				
GSM 850	Low	128	245.1923	314.1025
	Middle	192	246.7948	317.3076
	High	251	245.1923	312.5000
<b>Set-up 1, Op-Mode 3</b>				
E-GPRS 850	Low	128	245.1923	314.1025
	Middle	192	243.5897	309.2948
	High	251	243.5897	304.4871
<b>Set-up 1, Op-Mode 4</b>				
GSM 1900	Low	512	245.1923	314.1025
	Middle	661	246.7948	312.5000
	High	810	246.7948	312.5000
<b>Set-up 1, Op-Mode 6</b>				
E-GPRS 1900	Low	512	246.7948	309.2948
	Middle	661	246.7948	314.1025
	High	810	246.7948	310.8974

Remarks: see annex diagrams

## 5.5. RF-Parameter - Conducted out of Band RF emissions and Band Edge

### 5.5.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	CETECOM Essen (Chapter. 2.2.1)	Please see Chapter. 2.2.2		Please see Chapter. 2.2.3	
test site	347 Radio.lab. 1	Radio.lab. 2			
spectr. analys.	584 FSU	120 FSEM	264 FSEK	489 ESU	
signaling	017 CMD 65	323 CMD 55	340 CMD 55		
signaling	392 MT8820A	436 CMU	547 CMU		
power supply	463 HP3245A	457 EA 3013A	459 EA 2032-50	268 EA- 3050	494 AG6632A 498 NGPE 40
otherwise	529 6dB divider	530 10dB Att.	431 Near field		
line voltage	230 V 50 Hz via public mains		060 110 V/ 60 Hz via PAS 5000		

### 5.5.2. Requirements and limits

FCC	§2.1051, §2.1057(a)(1), §22.917(a)(b), §24.238(a)(b)
IC	RSS-132, Issue 3: 5.5, RSS-133, Issue 6: 6.5.1
Limit	„the power of emissions shall be attenuated below the transmitter output power (p) by at least 43+10Log(P) dB“ -> Resulting limit: -13dBm

### 5.5.3. Test condition and test set-up

Climatic conditions	Temperature: (22±3°C)	Rel. humidity: (40±20)%
Test system set-up	Please see chapter “Test system set-up for conducted measurements on antenna port”	
Measurement method	The spectrum was scanned from 9 kHz to the 10th harmonic of the highest frequency generated within the equipment. A PEAK detector was used except measurements near the block-edge where a AVERAGE detector applied.  A suitable artificial antenna or RF-connector is provided by the applicant in order to perform the conducted measurements. Any data provided with the artificial antenna or connector, have been taken in account in order to correct the measurement data. (typical 0.3dB for attenuation of antenna connector)	
Spectrum-Analyzer settings	See below tables	
Mobile phone settings	A call was established with settings according chapter “Parameter settings on mobile phone and base station CMU200”  UE Power should be set to maximum, continuous transmission. DTX or other power saving techniques have been disabled  The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.	

### Spectrum-Analyzer settings for GSM/GPRS/E-GPRS 850 Mode

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att. [dB]	Detector
Sweep 1 (subrange 1)	0.009	1	0.001	0.01	10	25	MaxH-PK
Sweep 1 (subrange 2)	1	30	0.1	1	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	820	1	10	10	35	MaxH-PK
Sweep 2 (subrange 2)	820	1000	1	10	2	45	MaxH-PK
Sweep 2 (subrange 3)	1000	9000	1	10	100	35	MaxH-PK
Sweep 3a (Block-Edge)	823	824	0.003	0.01	70	35	MaxH-PK
Sweep 3b (Block-Edge)	823	824	0.003	0.01	70	35	MaxH-AV
Sweep 4a (Block-Edge)	849	850	0.003	0.01	70	35	MaxH-PK
Sweep 4b (Block-Edge)	849	850	0.003	0.01	70	35	MaxH-AV

### Spectrum-Analyzer Settings GSM/GPRS/E-GPRS 1900 Mode

	Start freq. MHz	Stop freq. MHz	R-BW MHz	V-BW MHz	Sweep time sec.	Att.	Detector
Sweep 1 (subrange 1)	0.009	1	0.001	0.01	10	25	MaxH-PK
Sweep 1 (subrange 2)	1	30	0.1	1	5	25	MaxH-PK
Sweep 2 (subrange 1)	30	1000	1	10	100	35	MaxH-PK
Sweep 2 (subrange 2)	1000	2500	1	10	15	35	MaxH-PK
Sweep 2 (subrange 3)	2500	19500	1	10	150	35	MaxH-PK
Sweep 3a (Block-Edge)	1849	1850	0.003	0.01	70	35	MaxH-PK
Sweep 3b (Block-Edge)	1849	1850	0.003	0.01	70	35	MaxH-AV
Sweep 4a (Block-Edge)	1910	1911	0.003	0.01	70	35	MaxH-PK
Sweep 4b (Block-Edge)	1910	1911	0.003	0.01	70	35	MaxH-AV

#### 5.5.4. Measurement results

The results are presented below in summary form only. For more information please see each diagram enclosed in annex diagrams.

##### 5.5.4.1. GSM850: Set-up 2

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.01_RSE_Ch128_GSM_Sweep1	Low	128	9 kHz – 30 MHz	1	--				passed
36.02_RSE_Ch128_GSM_Sweep2	Low		30MHz – 9 GHz		Carrier visible on diagram, not relevant for result				passed
37.01_BE_Ch128_GSM	Low		823-824 MHz		Band Edge Compliance				passed
36.03_RSE_Ch192_GSM_Sweep1	Middle	192	9 kHz – 30 MHz		--				passed
36.04_RSE_Ch192_GSM_Sweep2	Middle		30MHz – 9 GHz		Carrier visible on diagram, not relevant for result				passed
36.05_RSE_Ch251_GSM_Sweep1	High	251	9 kHz – 30 MHz		--				passed
36.06_RSE_Ch251_GSM_Sweep2	High		30MHz – 9 GHz		Carrier visible on diagram, not relevant for result				passed
37.02_BE_Ch251_GSM	High		849 – 850 MHz		Band-Edge compliance				passed

Remark:--

**5.5.4.2. E-GPRS 850: Set-up 2**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.07_RSE_Ch128_EGPRS_Sweep1	Low	128	9 kHz – 30 MHz	3	--				passed
36.08_RSE_Ch128_EGPRS_Sweep2	Low		30MHz – 9 GHz		Carrier visible on diagram, not relevant for result				passed
37.03_BE_Ch128_EGPRS	Low		823 - 824 MHz		Band Edge Compliance				passed
36.09_RSE_Ch192_EGPRS_Sweep1	Middle	192	9 kHz – 30 MHz		--				passed
36.10_RSE_Ch192_EGPRS_Sweep2	Middle		30MHz – 9 GHz		Carrier visible on diagram, not relevant for result				passed
36.11_RSE_Ch251_EGPRS_Sweep1	High	251	9 kHz – 30 MHz		--				passed
36.12_RSE_Ch251_EGPRS_Sweep2	High		30MHz – 9 GHz		Carrier visible on diagram, not relevant for result				passed
37.04_BE_Ch251_EGPRS	High		849 – 850 MHz		Band-Edge compliance				passed

Remark:--

**5.5.4.3. GSM 1900: Set-up 2**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.20_RSE_Ch512_GSM_Sweep1	Low	512	9 kHz – 30 MHz	4	--				passed
36.21_RSE_Ch512_GSM_Sweep1	Low		30MHz – 20 GHz		Carrier visible on diagram, not relevant for result				passed
37.10_BE_Ch512_GSM	Low		1849 – 1850 MHz		Band Edge Compliance				passed
36.22_RSE_Ch661_GSM_Sweep1	Middle	661	9 kHz – 30 MHz		--				passed
36.23_RSE_Ch661_GSM_Sweep1	Middle		30MHz – 20 GHz		Carrier visible on diagram, not relevant for result				passed
36.24_RSE_Ch810_GSM_Sweep1	High	810	9 kHz – 30 MHz		--				passed
36.25_RSE_Ch810_GSM_Sweep1	High		30MHz – 20 GHz		Carrier visible on diagram, not relevant for result				passed
37.11_BE_Ch810_GSM	High		1910 – 1911 MHz		Band-Edge compliance				passed

Remark: --



**5.5.4.4. E-GPRS 1900: Set-up 2**

Diagram no.	Carrier Channel		Frequency range	OP-mode no.	Remark	Used detector			Result
	Range	No.				PK	AV	QP	
36.26_RSE_Ch512_EGPRS_Sweep1	Low	512	9 kHz – 30 MHz	6	--				passed
36.27_RSE_Ch512_EGPRS_Sweep1	Low		30MHz – 20 GHz		Carrier visible on diagram, not relevant for result				passed
37.12_BE_Ch512_EGPRS	Low		1849 – 1850 MHz		Band Edge Compliance				passed
36.28_RSE_Ch661_EGPRS_Sweep1	Middle	661	9 kHz – 30 MHz		--				passed
36.29_RSE_Ch661_EGPRS_Sweep1	Middle		30MHz – 20 GHz		Carrier visible on diagram, not relevant for result				passed
36.30_RSE_Ch810_EGPRS_Sweep1	High	810	9 kHz – 30 MHz		--				passed
36.31_RSE_Ch810_EGPRS_Sweep1	High		30MHz – 20 GHz		Carrier visible on diagram, not relevant for result				passed
37.13_BE_Ch810_EGPRS	High		1910 – 1911 MHz		Band-Edge compliance				passed

Remark: --

## 5.6. RF-Parameter - Frequency stability on temperature and voltage variations

### 5.6.1. Test location and equipments (for reference numbers please see chapter 'List of test equipment')

test location	CETECOM Essen (Chapter. 2.2.1)	Please see Chapter. 2.2.2		Please see Chapter. 2.2.3	
test site	347 Radio.lab.1	Radio.lab.2			
spectr. analys.	584 FSU	489 ESU 40	264 FSEK	620 ESU 26	
signaling	392 MT8820A	436 CMU	547 CMU		
DC power	456 EA 3013A	457 EA 3013A	459 EA 2032-50	268 EA- 3050	494 AG6632A 498 NGPE 40
otherwise	529 6dB divider	530 10dB Att.	431 Near field		
Climatic test chamber	331 HC 4055				
line voltage	230 V 50 Hz via public mains		060 110 V/ 60 Hz via PAS 5000		

### 5.6.2. Requirements and limits

<b>FCC</b>	§2.1055(a)(1), §22.355, §24.235
<b>IC</b>	RSS-132: 5.3, RSS-133: 6.3
<b>Limit</b>	“ The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block”

### 5.6.3. Test condition and test set-up

Test system set-up	Please see chapter “Test system set-up for conducted measurements on antenna port”  In order to maintain the voltage constant over the time period of the tests, a dummy battery was connected to a laboratory power supply. The power supply voltage was controlled on the input of the power supply terminals of the EUT.
Measurement method	The GSM RF Channel spacing is 200 kHz according GSM-Spec, with a guard band of 200 kHz of each band of the sub-bands. The purpose of the EUT is to function under all extreme conditions within authorized sub-bands in regard to temperature and voltage variations. The frequency deviation was recorded with base station’s build in capability. (CMU)  As the standard requires that the fundamental emissions stays within the authorized band, a limit of 0.1ppm is considered low enough to ensure this.
Mobile phone settings	A call was established with settings according chapter “Parameter settings on mobile phone and base station CMU200” The measurements were made at the low, middle and high carrier frequencies of each of the supported operating band. Choosing three TX-carrier frequencies of the mobile phone, should be sufficient to demonstrate compliance.


### 5.6.4. Measurement results

#### 5.6.4.1. Frequency shift of carrier against a voltage range at constant nominal temperature of 20° Celsius

- 1.) determine the carrier frequency for the lowest and highest channel at room temperature and nominal voltage [20°C]
- 2.) The voltage was reduced in 0.1 Volt steps to the lower end point, where the mobile phone stops working. (this shall be specified by the manufacturer) Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self heating effects.
- 3.) The voltage was increased in 0.1 Volt steps to the upper declared voltage of the battery. Record the carrier frequency shift within 2 minutes after powering on the mobile phone, to prevent for self heating effects.


5.6.4.1.1. GSM 850 Mode: Op. Mode 1, set-up 2

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict
		[Hz]	[ppm]	
3,30	8,37E+08	10	0,012	passed
3,40		13	0,016	
3,50		15	0,018	
3,60		15	0,018	
3,70		16	0,019	
3,80		15	0,018	
3,90		15	0,018	
4,00		15	0,018	
4,10		14	0,017	
4,20		15	0,018	
4,30		14	0,017	
4,40		15	0,018	
4,50		17	0,020	

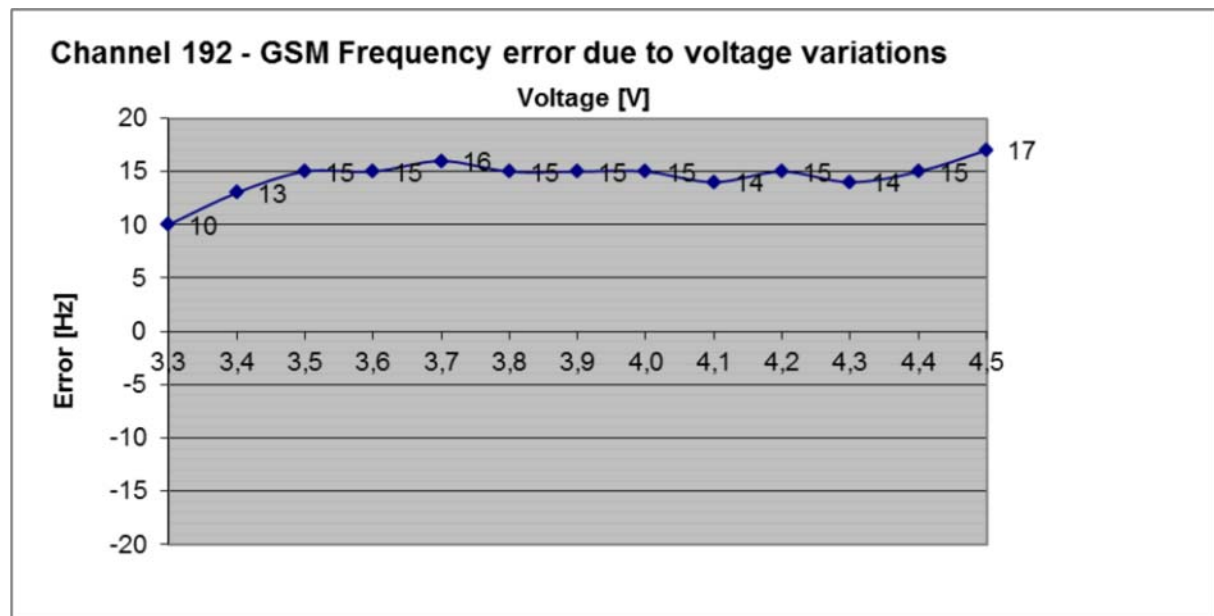


5.6.4.1.2. E-GPRS 850 Mode: Op. Mode 3, set-up 2

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict
		[Hz]	[ppm]	
3,30	8,37E+08	-21	-0,025	passed
3,40		-17	-0,020	
3,50		-17	-0,020	
3,60		-17	-0,020	
3,70		-19	-0,023	
3,80		-19	-0,023	
3,90		-18	-0,022	
4,00		-18	-0,022	
4,10		-18	-0,022	
4,20		-20	-0,024	
4,30		-20	-0,024	
4,40		-19	-0,023	
4,50		-17	-0,020	

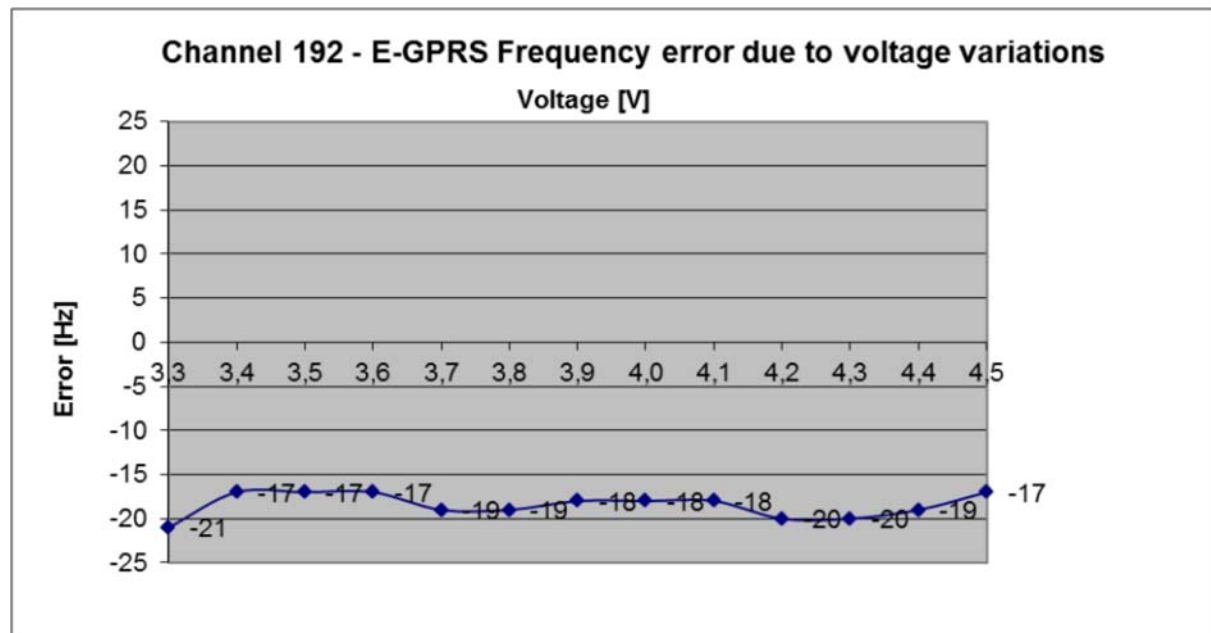


**5.6.4.1.3. GSM 1900 Mode: Op. Mode 4, set-up 2**

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict
		[Hz]	[ppm]	
3,30	1,88E+09	26	0,014	passed
3,40		24	0,013	
3,50		26	0,014	
3,60		25	0,013	
3,70		21	0,011	
3,80		24	0,013	
3,90		23	0,012	
4,00		22	0,012	
4,10		20	0,011	
4,20		19	0,010	
4,30		17	0,009	
4,40		19	0,010	
4,50		17	0,009	

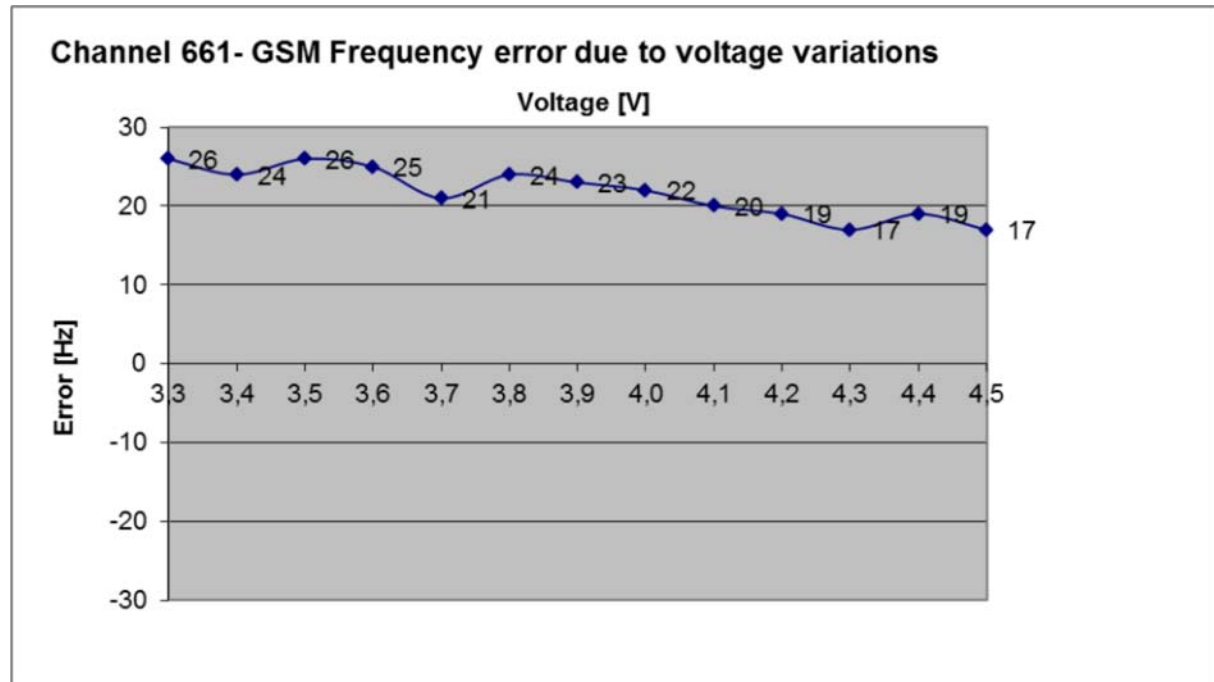

**5.6.4.1.4. E-GPRS1900 Mode: Op. Mode 6, set-up 2**

Voltage [V]	Nominal Frequency [MHz]	Maximum frequency error		Verdict
		[Hz]	[ppm]	
3,30	1,88E+09	-28	-0,015	passed
3,40		-29	-0,015	
3,50		-24	-0,013	
3,60		-19	-0,010	
3,70		-21	-0,011	
3,80		-23	-0,012	
3,90		-24	-0,013	
4,00		-20	-0,011	
4,10		-20	-0,011	
4,20		-23	-0,012	
4,30		-20	-0,011	
4,40		-21	-0,011	
4,50		-23	-0,012	

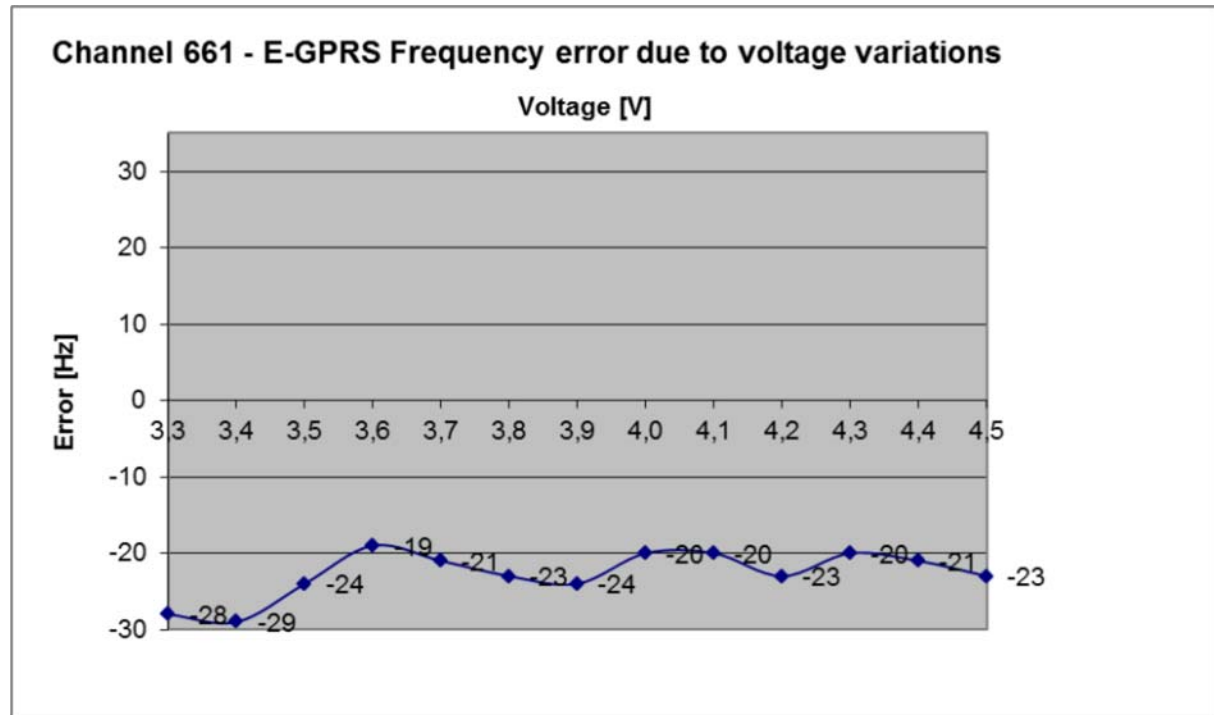


**5.6.4.2. Frequency shift of carrier against temperature at constant power supply voltage**

- 1.) determine the carrier frequency for the lowest, middle and highest channel at room temperature and nominal voltage [20°C]
- 2.) expose the mobile station to -30°C, wait sufficient time to have constant temperature.
- 3.) Perform the carrier frequencies measurements in 10°C increments from -30°C to +60°C. For about half hour at the specified temperature the mobile was powered-off. After powering-on, the measurements were made within 2 minute for the channel lower channel, in order to prevent self-warming of the mobile.


**5.6.4.2.1. GSM 850 Mode: Op. Mode 1, set-up 2**

Temperature	Maximum frequency error						Verdict Limit=±0.1ppm
	Channel 128	Channel 192	Channel 251	Channel 128	Channel 189	Channel 250	
	[Hz]			[ppm]			
-30	18	18	16	0,022	0,022	0,019	Passed
-20	19	16	16	0,023	0,019	0,019	
-10	16	15	15	0,019	0,018	0,018	
0	16	15	15	0,019	0,018	0,018	
10	16	16	14	0,019	0,019	0,016	
20	19	13	16	0,023	0,016	0,019	
30	17	16	16	0,021	0,019	0,019	
40	19	17	15	0,023	0,020	0,018	
50	19	16	14	0,023	0,019	0,016	

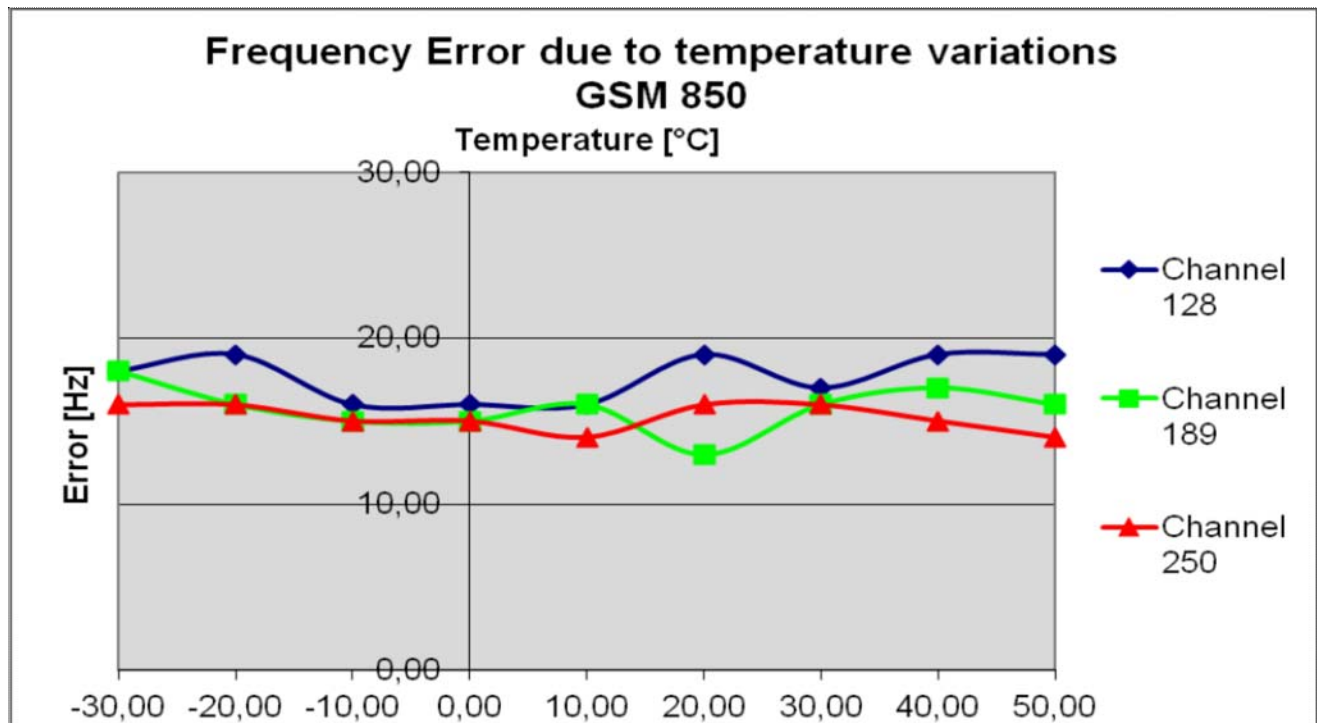

5.6.4.2.2. E-GPRS 850 Mode: Op. Mode 3, set-up 2


Temperature	Maximum frequency error						Verdict
	Channel 128	Channel 192	Channel 251	Channel 128	Channel 192	Channel 251	
	[Hz]			[ppm]			Limit=±0.1ppm
-30	-14	-14	-16	-0,017	-0,017	-0,019	Passed
-20	-15	-15	-18	-0,018	-0,018	-0,021	
-10	-19	-18	-17	-0,023	-0,022	-0,020	
0	-16	-17	-16	-0,019	-0,020	-0,019	
10	-19	-18	-19	-0,023	-0,022	-0,022	
20	-16	-17	-18	0,023	0,016	0,019	
30	-18	-18	-20	-0,022	-0,022	-0,024	
40	-18	-18	-20	-0,022	-0,022	-0,024	
50	-16	-21	-19	-0,019	-0,025	-0,022	

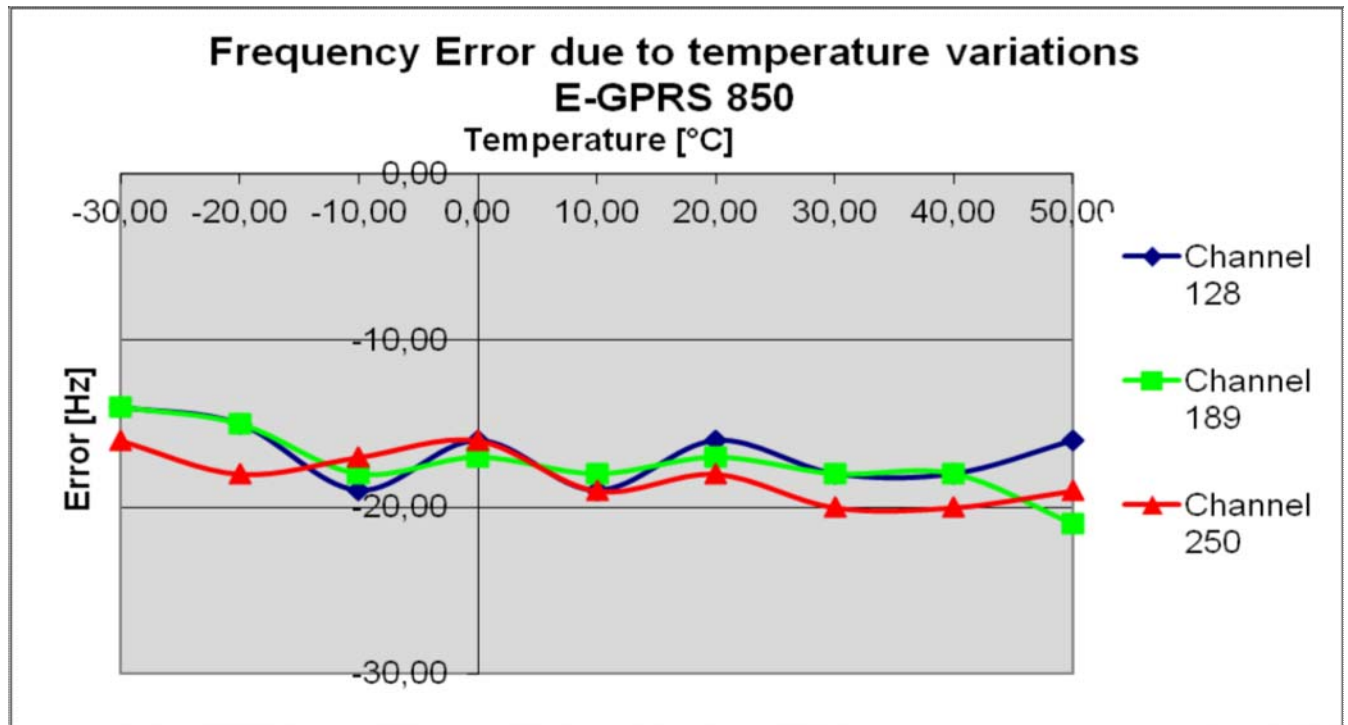




5.6.4.2.3. GSM 1900 Mode: Op. Mode 4, set-up 2

Temperature	Maximum frequency error						Verdict
	Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810	
	[Hz]			[ppm]			Limit=±0.1ppm
-30	21	21	19	0,011	0,011	0,010	Passed
-20	-26	-23	22	-0,014	-0,012	0,012	
-10	-39	-34	25	-0,021	-0,018	0,013	
0	-46	-32	22	-0,025	-0,017	0,012	
10	-47	-22	22	-0,025	-0,012	0,012	
20	-58	17	16	-0,031	0,009	0,008	
30	-54	16	16	-0,029	0,009	0,008	
40	-48	17	-20	-0,026	0,009	-0,010	
50	20	16	-19	0,011	0,009	-0,010	

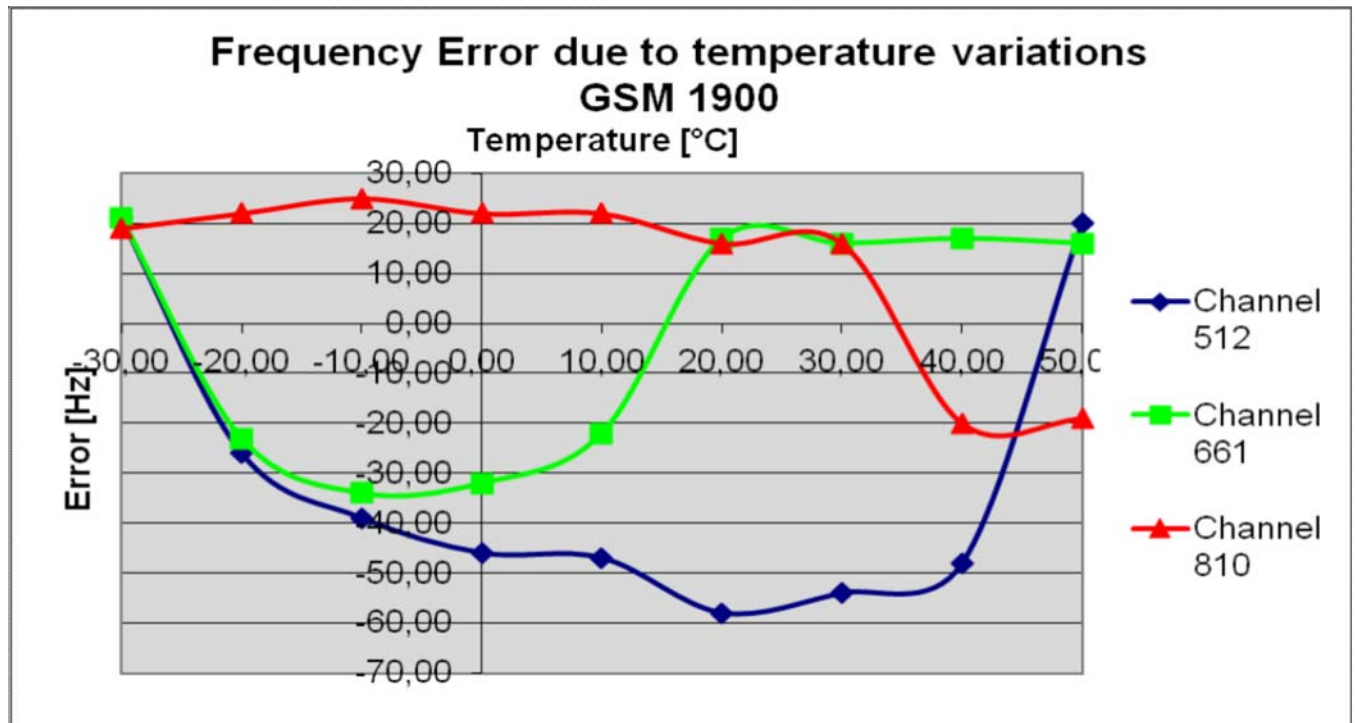

5.6.4.2.4. E-GPRS 1900 Mode: Op. Mode 6, set-up 2

Temperature	Maximum frequency error						Verdict
	Channel 512	Channel 661	Channel 810	Channel 512	Channel 661	Channel 810	
	[Hz]			[ppm]			Limit=±0.1ppm
-30	-23	-26	-28	-0,012	-0,014	-0,015	Passed
-20	-21	-26	-27	-0,011	-0,014	-0,014	
-10	-22	-26	-21	-0,012	-0,014	-0,011	
0	-21	-25	-24	-0,011	-0,013	-0,013	
10	-20	-26	-25	-0,011	-0,014	-0,013	
20	-18	-20	-25	-0,010	-0,011	-0,013	
30	-20	-20	-27	-0,011	-0,011	-0,014	
40	-22	-23	-28	-0,012	-0,012	-0,015	
50	-17	-25	-28	-0,009	-0,013	-0,015	

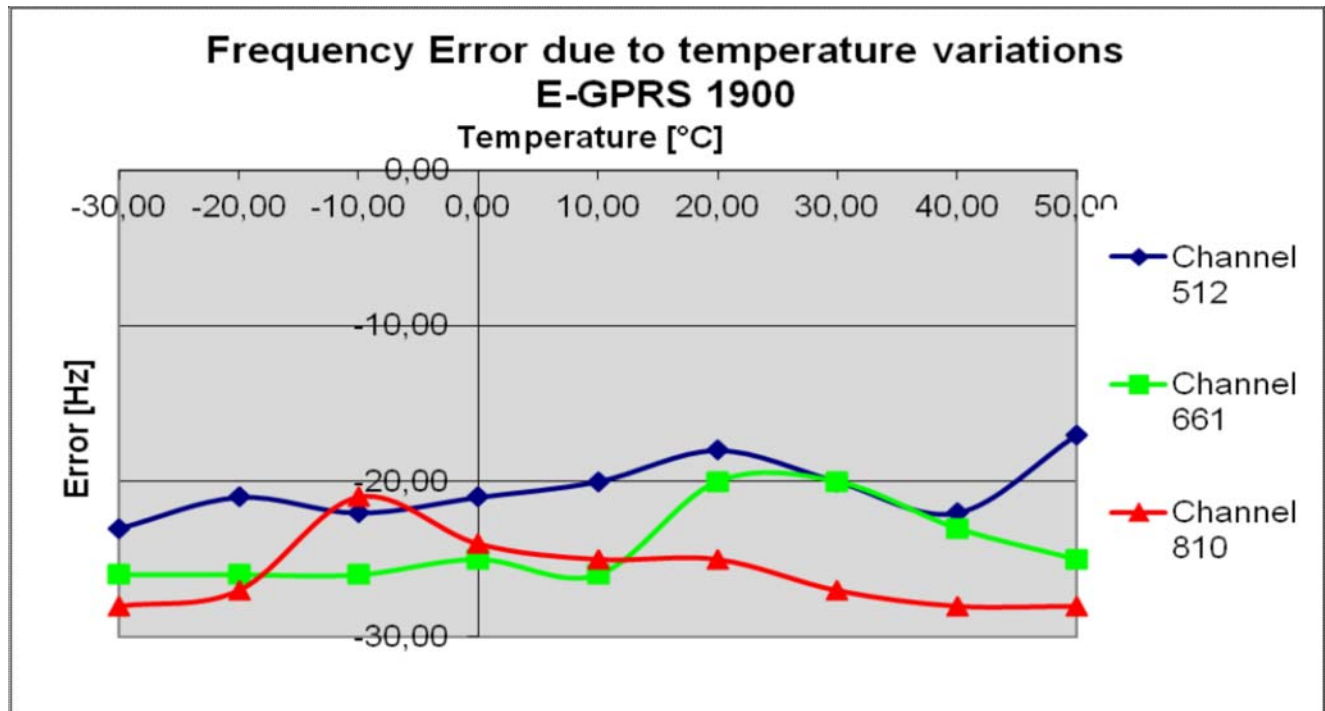

### 5.7. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved.

For uncertainty determination, each component used in the concrete measurement set-up was taken in account and it's contribution to the overall uncertainty according it's statistical distribution calculated.

Following table shows expectable uncertainties for each measurement type performed.

RF-Measurement	Frequency range	Calculated uncertainty based on a confidence level of 95%	Remarks:
Power Output conducted	9 kHz .. 20 GHz	1.0 dB	--
Power Output radiated	30 MHz .. 4 GHz	3.17 dB	Substitution method
Conducted emissions on antenna ports	9 kHz .. 20 GHz	1.0 dB	--
Radiated emissions enclosure	150 kHz .. 30 MHz	5.0 dB	Magnetic field
	30 MHz .. 1 GHz	4.2 dB	E-Field
	1 GHz .. 20 GHz	3.17 dB	Substitution method
Occupied bandwidth	9 kHz .. 4 GHz	0.1272 ppm (Delta Marker )	Frequency error
		1.0 dB	Power
Emission bandwidth	9 kHz .. 4 GHz	0.1272 ppm (Delta Marker)	Frequency error
		1.0 dB	Power
Frequency stability	9 kHz .. 20 GHz	0.0636 ppm	--
Conducted emissions on AC-mains port (U <sub>CISPR</sub> )	9 kHz .. 150 kHz	4.0 dB	--
	150 kHz .. 30 MHz	3.6 dB	--

**Table: measurement uncertainties, valid for conducted/radiated measurements**

### 6. Abbreviations used in this report

The abbreviations	
ANSI	American National Standards Institute
AV , AVG, CAV	Average detector
EIRP	Equivalent isotropically radiated power, determined within a separate measurement
EGPRS	Enhanced General Packet Radio Service
EUT	Equipment Under Test
FCC	Federal Communications Commission, USA
IC	Industry Canada
n.a.	not applicable
Op-Mode	Operating mode of the equipment
PK	Peak
RBW	resolution bandwidth
RF	Radio frequency
RSS	Radio Standards Specification, Dokuments from Industry Canada
Rx	Receiver
TCH	Traffic channel
Tx	Transmitter
QP	Quasi peak detector
VBW	Video bandwidth
ERP	Effective radiated power

## 7. Accreditation details of CETECOM's laboratories and test sites

Ref.-No.	Accreditation Certificate	Valid for laboratory area or test site	Accreditation Body
-	D-PL-12047-01-01	All laboratories and test sites of CETECOM GmbH, Essen	DAkKS, Deutsche Akkreditierungsstelle GmbH
337 487 558 348 348	736496	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	FCC, Federal Communications Commission Laboratory Division, USA (MRA US-EU 0003)
337 487 550 558	3462D-1 3462D-2 3462D-2 3462D-3	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Radiated Measurements above 1 GHz, 3 m (FAR)	IC, Industry Canada Certification and Engineering Bureau
337 487 550 348 348	R-2665 R-2666 G-301 C-2914 T-1967	Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS) Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR) Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR) Mains Ports Conducted Interference Measurements Telecommunication Ports Conducted Interference Measur.	VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan

OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room

## 8. Instruments and Ancillary

### 8.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 8.1.1. Test software and firmware of equipment

Ref.-No.	Equipment	Type	Serial-No.	Version of Firmware or Software during the test
001	EMI Test Receiver	ESS	825132/017	Firm.= 1.21 , OTP=2.0, GRA=2.0
012	Signal Generator (EMS-cond.)	SMY 01	839069/027	Firm.= V 2.02
013	Power Meter (EMS cond.)	NRVD	839111/003	Firm.= V 1.51
017	Digital Radiocommunication Tester	CMD 60 M	844365/014	Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99
053	Audio Analyzer	UPA3	860612/022	Firm. V 4.3
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	Firm.= V 3.1DHG
140	Signal Generator	SMHU	831314/006	Firm.= 3.21
261	Thermal Power Sensor	NRV-Z55	825083/0008	EPROM-Datum 02.12.04, SE EE 1 B
262	Power Meter	NRV-S	825770/0010	Firm.= 2.6
263	Signal Generator	SMP 04	826190/0007	Firm.=3.21
264	Spectrum Analyzer	FSEK 30	826939/005	Bios=2.1, Analyzer= 3.20
295	Racal Digital Radio Test Set	6103	1572	UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02
298	Univ. Radio Communication Tester	CMU 200	832221/091	R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used
323	Digital Radiocommunication Tester	CMD 55	825878/0034	Firm.= 3.52 .22.01.99
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	TSI 1.53
335	CTC-EMS-Conducted	System EMS Conducted	-	EMC 32 V 8.52
340	Digital Radiocommunication Tester	CMD 55	849709/037	Firm.= 3.52 .22.01.99
355	Power Meter	URV 5	891310/027	Firm.= 1.31
365	10V Insertion Unit 50 Ohm	URV5-Z2	100880	Eprom Data = 31.03.08
366	Ultra Compact Simulator	UCS 500 M4	V0531100594	Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10
371	Bluetooth Tester	CBT32	100153	CBT V5.30+ SW-Option K55, K57
377	EMI Test Receiver	ESCS 30	100160	Firm.= 2.30, OTP= 02.01, GRA= 02.36
378	Broadband RF Field Monitor	RadiSense III	03D00013SNO-08	Firm.= V.03D13
383	Signal Generator	SME 03	842 828 /034	Firm.= 4.61
389	Digital Multimeter	Keithley 2000	0583926	Firm. = A13 (Mainboard) A02 (Display)
392	Radio Communication Tester	MT8820A	6K00000788	Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002
436	Univ. Radio Communication Tester	CMU 200	103083	R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	EMC 32 Version 8.52
442	CTC-SAR-EMS	System EMS field (SAR)	-	EMC 32 Version 8.40
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	Spuri 7.2.5 or EMC 32 Ver. 8.53
444	CTC-FAR-EMS field	System-EMS-Field (FAR)	-	EMC 32 Version 8.40
460	Univ. Radio Communication Tester	CMU 200	108901	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,
489	EMI Test Receiver	ESU40	1000-30	Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00
491	ESD Simulator dito	ESD dito	dito307022	V 2.30
524	Voltage Drop Simulator	VDS 200	0196-16	Software Nr: 000037 Version V4.20a01
526	Burst Generator	EFT 200 A	0496-06	Software Nr. 000034 Version V2.32
527	Micro Pulse Generator	MPG 200 B	0496-05	Software-Nr. 000030 Version V2.43
528	Load Dump Simulator	LD 200B	0496-06	Software-Nr. 000031 Version V2.35a01
546	Univ. Radio Communication Tester	CMU 200	106436	R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used
547	Univ. Radio Communication Tester	CMU 200	835390/014	R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14
584	Spectrum Analyzer	FSU 8	100248	2.82 SP3
594	Wideband Radio Communication Tester	CMW 500	101757	Firmware Base=2.0.20.9, LTE=2.0.20.8. CDMA= 2.0.10
597	Univ. Radio Communication Tester	CMU 200	100347	R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Firmware Bios 3.40 , Analyzer 3.40 Sp 2
620	EMI Test Receiver	ESU 26	100362	4.43 SP3
642	Wideband Radio Communication Tester	CMW 500	126089	Setup V03.26, Test programm component V02.12.01

### 8.1.2. Single instruments and test systems

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
001	EMI Test Receiver	ESS	825132/017	Rohde & Schwarz	12 M	-	31.03.2014
005	AC - LISN (50 Ohm/50µH, test site 1)	ESH2-Z5	861741/005	Rohde & Schwarz	24/12 M	-	31.03.2014
007	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	892563/002	Rohde & Schwarz	24/12 M	-	31.03.2014
009	Power Meter (EMS-radiated)	NRV	863056/017	Rohde & Schwarz	24 M	-	31.03.2015
016	Line Impedance Simulating Network	Op. 24-D	B6366	Spitzenberger+Spies	36 M	-	31.03.2016
020	Horn Antenna 18 GHz (Subst 1)	3115	9107-3699	EMCO	36/12 M	-	31.03.2014
021	Loop Antenna (H-Field)	6502	9206-2770	EMCO	36 M	-	31.03.2015
030	Loop Antenna (H-field)	HFH-Z2	879604/026	Rohde & Schwarz	36 M	-	31.03.2015
033	RF-current probe (100kHz-30MHz)	ESH2-Z1	879581/18	Rohde & Schwarz	24 M	-	31.03.2015
057	relay-switch-unit (EMS system)	RSU	494440/002	Rohde & Schwarz	pre-m	1a	
060	power amplifier (DC-2kHz)	PAS 5000	B6363	Spitzenberger+Spies	-	3	
066	notch filter (WCDMA; FDD1)	WRCT 1900/2200-5/40-10EEK	5	Wainwright GmbH	12 M	1g	30.06.2014
086	DC - power supply, 0 -10 A	LNG 50-10	-	Heinzinger Electronic	pre-m	2	
087	DC - power supply, 0 -5 A	EA-3013 S	-	Elektro Automatik	pre-m	2	
090	Helmholtz coil: 2x10 coils in series	-	-	RWTÜV	-	4	
091	USB-LWL-Converter	OLS-1	007/2006	Ing. Büro Scheiba	-	4	
099	passive voltage probe	ESH2-Z3	299.7810.52	Rohde & Schwarz	36 M	-	31.03.2015
100	passive voltage probe	Probe TK 9416	without	Schwarzbeck	36 M	-	31.03.2015
110	USB-LWL-Converter	OLS-1	-	Ing. Büro Scheiba	-	4	
119	RT Harmonics Analyzer dig. Flickermeter	B10	G60547	BOCONSULT	36 M	-	31.03.2016
134	horn antenna 18 GHz (Subst 2)	3115	9005-3414	EMCO	pre-m	-	
136	adjustable dipole antenna (Dipole 1)	3121C-DB4	9105-0697	EMCO	36 M	-	31.03.2015
140	Signal Generator	SMHU	831314/006	Rohde & Schwarz	24 M	-	31.03.2014
248	attenuator	SMA 6dB 2W	-	Radiall	pre-m	2	
249	attenuator	SMA 10dB 10W	-	Radiall	pre-m	2	
252	attenuator	N 6dB 12W	-	Radiall	pre-m	2	
256	attenuator	SMA 3dB 2W	-	Radiall	pre-m	2	
257	hybrid	4031C	04491	Narda	pre-m	2	
260	hybrid coupler	4032C	11342	Narda	pre-m	2	
261	Thermal Power Sensor	NRV-Z55	825083/0008	Rohde & Schwarz	24 M	-	31.03.2014
262	Power Meter	NRV-S	825770/0010	Rohde & Schwarz	24 M	-	31.03.2014
263	Signal Generator	SMP 04	826190/0007	Rohde & Schwarz	36 M	-	31.03.2016
264	Spectrum Analyzer	FSEK 30	826939/005	Rohde & Schwarz	12 M	-	31.03.2014
265	peak power sensor	NRV-Z33, Model 04	840414/009	Rohde & Schwarz	24 M	-	31.03.2014
266	peak power sensor	NRV-Z31, Model 04	843383/016	Rohde & Schwarz	24 M	-	31.03.2014
267	notch filter GSM 850	WRCA 800/960-6EEK	9	Wainwright GmbH	pre-m	2	
270	termination	1418 N	BB6935	Weinschel	pre-m	2	
271	termination	1418 N	BE6384	Weinschel	pre-m	2	
272	attenuator (20 dB) 50 W	Model 47	BF6239	Weinschel	pre-m	2	
273	attenuator (10 dB) 100 W	Model 48	BF9229	Weinschel	pre-m	2	
274	attenuator (10 dB) 50 W	Model 47 (10 dB) 50 W	BG0321	Weinschel	pre-m	2	
275	DC-Block	Model 7003 (N)	C5129	Weinschel	pre-m	2	
276	DC-Block	Model 7006 (SMA)	C7061	Weinschel	pre-m	2	
279	power divider	1515 (SMA)	LH855	Weinschel	pre-m	2	
287	pre-amplifier 25MHz - 4GHz	AMF-2D-100M4G-35-10P	379418	Miteq	12 M	1c	30.06.2014
291	high pass filter GSM 850/900	WHJ 2200-4EE	14	Wainwright GmbH	12 M	1c	30.06.2014
298	Univ. Radio Communication Tester	CMU 200	832221/091	Rohde & Schwarz	pre-m	3	
300	AC LISN (50 Ohm/50µH, 1-phase)	ESH3-Z5	892 239/020	Rohde & Schwarz	24/12 M	-	31.03.2014
301	attenuator (20 dB) 50W, 18GHz	47-20-33	AW0272	Lucas Weinschel	pre-m	2	
302	horn antenna 40 GHz (Meas 1)	BBHA9170	155	Schwarzbeck	36 M	-	31.03.2014
303	horn antenna 40 GHz (Subst 1)	BBHA9170	156	Schwarzbeck	36 M	-	31.03.2014
331	Climatic Test Chamber -40/+80 Grad	HC 4055	43146	Heraeus Vötsch	24 M	-	30.11.2014
341	Digital Multimeter	Fluke 112	81650455	Fluke	24 M	-	31.03.2014
342	Digital Multimeter	Voltcraft M-4660A	IB 255466	Voltcraft	24 M	-	31.03.2015
347	laboratory site	radio lab.	-	-	-	5	
348	laboratory site	EMI conducted	-	-	-	5	
354	DC - Power Supply 40A	NGPE 40/40	448	Rohde & Schwarz	pre-m	2	
355	Power Meter	URV 5	891310/027	Rohde & Schwarz	24 M	-	31.03.2014
356	power sensor	NRV-Z1	882322/014	Rohde & Schwarz	24 M	-	31.03.2015
357	power sensor	NRV-Z1	861761/002	Rohde & Schwarz	24 M	-	31.03.2015
371	Bluetooth Tester	CBT32	100153	R&S	24 M	-	31.03.2014
373	Single-Line V-Network (50 Ohm/5µH)	ESH3-Z6	100535	Rohde & Schwarz	24/12 M	-	31.03.2014
376	Horn Antenna 6 GHz	BBHA9120 E	BBHA 9120 E 179	Schwarzbeck	12 M	-	31.03.2014
377	EMI Test Receiver	ESCS 30	100160	Rohde & Schwarz	12 M	-	31.03.2014
389	Digital Multimeter	Keithley 2000	0583926	Keithley	24 M	-	31.03.2015
392	Radio Communication Tester	MT8820A	6K00000788	Anritsu	12 M	-	31.03.2014
431	Model 7405	Near-Field Probe Set	9305-2457	EMCO	-	4	
436	Univ. Radio Communication Tester	CMU 200	103083	Rohde & Schwarz	12 M	-	31.03.2014
441	CTC-SAR-EMI Cable Loss	System EMI field (SAR)	-	CETECOM	12 M	5	31.10.2013

Ref.-No.	Equipment	Type	Serial-No.	Manufacturer	Interval of calibration	Remark	Cal due
		Cable					
443	CTC-FAR-EMI-RSE	System CTC-FAR-EMI-RSE	-	ETS-Lindgren / CETECOM	12 M	5	15.07.2014
448	notch filter WCDMA_FDD II	WRCT 1850.0/2170.0-5/40-	5	Wainwright Instruments GmbH	12 M	1c	30.06.2013
449	notch filter WCDMA FDD V	WRCT 824.0/894.0-5/40-8SSK	1	Wainwright	12 M	1c	30.06.2014
454	Oscilloscope	HM 205-3	9210 P 29661	Hameg	-	4	
456	DC-Power supply 0-5 A	EA 3013 S	207810	Elektro Automatik	pre-m	2	
459	DC -Power supply 0-5 A , 0-32 V	EA-PS 2032-50	910722	Elektro Automatik	pre-m	2	
460	Univ. Radio Communication Tester	CMU 200	108901	Rohde & Schwarz	12 M	-	31.03.2014
463	Universal source	HP3245A	2831A03472	Agilent	-	4	
466	Digital Multimeter	Fluke 112	89210157	Fluke USA	24 M	-	31.03.2014
467	Digital Multimeter	Fluke 112	89680306	Fluke USA	24 M	-	31.03.2014
468	Digital Multimeter	Fluke 112	90090455	Fluke USA	24 M	-	31.03.2014
477	ReRadiating GPS-System	AS-47	-	Automotive Cons. Fink	-	3	
480	power meter (Fula)	NRVS	838392/031	Rohde & Schwarz	24 M	-	31.03.2015
482	filter matrix	Filter matrix SAR 1	-	CETECOM (Brl)	-	1d	
484	pre-amplifier 2,5 - 18 GHz	AMF-5D-02501800-25-10P	1244554	Miteq	12 M	-	30.06.2013
487	System CTC NSA-Verification SAR-EMI	System EMI field (SAR) NSA	-	ETS Lindgren / CETECOM	24 M	-	30.06.2015
489	EMI Test Receiver	ESU40	1000-30	Rohde & Schwarz	12 M	-	31.03.2014
502	band reject filter	WRCG 1709/1786-1699/1796-	SN 9	Wainwright	pre-m	2	
503	band reject filter	WRCG 824/849-814/859-	SN 5	Wainwright	pre-m	2	
512	notch filter GSM 850	WRCA 800/960-02/40-6EEK	SN 24	Wainwright	12 M	1c	30.06.2014
517	relais switch matrix	HF Relais Box Keithley	SE 04	Keithley	pre-m	2	
523	Digital Multimeter	L4411A	MY46000154	Agilent	24 M	-	31.03.2015
529	6 dB Broadband resistive power divider	Model 1515	LH 855	Weinschel	pre-m	2	
530	10 dB Broadband resistive power divider	R 416110000	LOT 9828	-	pre-m	2	
546	Univ. Radio Communication Tester	CMU 200	106436	R&S	12 M	-	31.03.2014
547	Univ. Radio Communication Tester	CMU 200	835390/014	Rohde & Schwarz	12 M	-	31.03.2014
548	Digital-Barometer	GBP 2300	without	Greisinger GmbH	36 M	-	30.06.2015
549	Log.Per-Antenna	HL025	1000060	Rohde & Schwarz	36/12 M	-	31.03.2015
552	high pass filter 2,8-18GHz	WHKX 2.8/18G-10SS	4	Wainwright	12 M	1c	30.06.2013
558	System CTC FAR S-VSWR	System CTC FAR S-VSWR	-	CTC	24 M	-	31.07.2013
574	Biconilog Hybrid Antenna	BTA-L	980026L	Frankonia	36/12 M	-	31.03.2016
584	Spectrum Analyzer	FSU 8	100248	Rohde & Schwarz	24 M	-	31.03.2014
594	Wideband Radio Communication Tester	CMW 500	101757	Rohde & Schwarz	24 M	-	31.03.2014
597	Univ. Radio Communication Tester	CMU 200	100347	Rohde & Schwarz	12 M	-	31.03.2014
598	Spectrum Analyzer	FSEM 30 (Reserve)	831259/013	Rohde & Schwarz	24 M	-	13.01.2015
600	power meter	NRVD (Reserve)	834501/018	Rohde & Schwarz	24 M	-	31.03.2015
601	medium-sensitivity diode sensor	NRV-Z5 (Reserve)	8435323/003	Rohde & Schwarz	24 M	-	31.03.2015
602	peak power sensor	NRV-Z32 (Reserve)	835080	Rohde & Schwarz	24 M	-	31.03.2015
608	UltraLog-Antenna	HL 562	830547/009	Rohde & Schwarz	36/12 M	-	31.03.2014
611	DC power supply	E3632A	KR 75305854	Agilent	pre-m	2	
612	DC power supply	E3632A	MY 40001321	Agilent	pre-m	2	
613	Attenuator	R416120000 20dB 10W	Lot. 9828	Radiall	pre-m	2	
616	Digitalmultimeter	Fluke 177	88900339	Fluke	24 M	-	31.03.2014
617	Power Splitter/Combiner	ZFSC-2-2-S+	S F987001108	Mini Circuits	-	2	
618	Power Splitter/Combiner	50PD-634	600994	JFW Industries USA	-	2	
619	Power Splitter/Combiner	50PD-634	600995	JFW Industries, USA	-	3	
620	EMI Test Receiver	ESU 26	100362	Rohde-Schwarz	12 M	-	01.03.2014
621	Step Attenuator 0-139 dB	RSP	100017	Rohde & Schwarz	pre-m	2	
625	Generic Test Load USB	Generic Test Load USB	-	CETECOM	-	2	
627	data logger	OPUS 1	201.0999.9302.6.4.1.43	G. Luft GmbH	24 M	-	30.05.2014
634	Spectrum Analyzer	FSM (HF-Unit)	826188/010	Rohde & Schwarz	pre-m	2	
636	Thermal Imaging camera	Ti32	Ti32-12060213	Fluke Corporation	24 M	-	31.07.2014
637	High Speed HDMI with Ethernet 1m	HDMI cable with Ethernet 1m	-	Kogilink	-	2	
638	HDMI Kabel with Ethernet 1,5 m flach	HDMI cable with Ethernet	-	Reichelt	-	2	
640	HDMI cable 2m rund	HDMI cable 2m rund	-	Reichelt	-	2	
641	HDMI cable with Ethernet	Certified HDMI cable with	-	PureLink	-	2	
642	Wideband Radio Communication Tester	CMW 500	126089	Rohde&Schwarz	24 M	-	31.03.2014
644	Amplifierer	ZX60-2534M+	SN865701299	Mini-Circuits	-	-	
670	Univ. Radio Communication Tester	CMU 200	106833	Rohde & Schwarz	12 M	-	31.03.2014
671	DC-power supply 0-5 A	EA-3013S	-	Elektro Automatik	pre-m	2	



### 8.1.3. Legend

Note / remarks		Calibrated during system calibration:
	1a	System CTC-SAR-EMS (Ref.-No. 442)
	1b	System-CTC-EMS-Conducted (Ref.-No. 335)
	1c	System CTC-FAR-EMI-RSE (Ref.-No . 443)
	1d	System CTC-SAR-EMI (Ref.-No . 441)
	1e	System CTC-OATS (EMI radiated) (Ref.-No. 337)
	1 f	System CTC-CTIA-OTA (Ref.-No . 420)
	1 g	System CTC-FAR-EMS (Ref.-No . 444)
	2	Calibration or equipment check immediately before measurement
	3	Regulatory maintained equipment for functional check or support purpose
	4	Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment
	5	Test System

Interval of calibration		
	12 M	12 month
	24 M	24 month
	36 M	36 month
	24/12 M	Calibration every 24 months, between this every 12 months internal validation
	36/12 M	Calibration every 36 months, between this every 12 months internal validation
	Pre-m	Check before starting the measurement
	-	Without calibration