

TEST REPORT

Applicant : Sharp Corporation, Communication Systems Division
Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN

Products : Smart Phone
Model No. : SH-03G
SERIAL NO. : 004401115391506
004401115391514

FCC ID : APYHRO00217

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : March 6 ~ 24, 2015



A handwritten signature in black ink, appearing to read 'K. Shibata', is written over a horizontal line.

Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test	3
2 Summary of Test Results	4
3 Test Procedure.....	5
4 Test Location	5
5 Recognition of Test Laboratory	5
6 Details of the Equipment Under Test	6
7 Details of the Test Item	10

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility☒ - indicates that the listed condition, standard or equipment is applicable for this report.☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Smart Phone
3. Model No. : SH-03G
4. Serial No. : 004401115391506
: 004401115391514
5. Product Type : Pre-production
6. Date of Manufacture : January, 2015
7. Power Rating : 4.0VDC (Lithium-ion Battery UBATIA258AFN1 3000mAh)
8. EUT Grounding : None
9. Transmitting Frequency : WLAN: 2412.0 MHz(01CH) –2462.0MHz(11CH)
: Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
10. Receiving Frequency : WLAN: 2412.0 MHz(01CH) –2462.0MHz(11CH)
: Bluetooth LE: 2402.0 MHz(00CH) – 2480.0MHz(39CH)
11. Max. RF Output Power : 18.32dBm(Measure Value of IEEE802.11b)
: 23.21dBm(Measure Value of IEEE802.11g)
: 22.75dBm(Measure Value of IEEE802.11n)
: 4.51dBm(Measure Value of Bluetooth LE)
12. Antenna Type : Inverted-L Type Antenna (Integral)
13. Antenna Gain : 0 dBi (ANT0/ANT1)
14. Category : DTS
15. EUT Authorization : Certification
16. Received Date of EUT : March 6, 2015

17. Channel Plan**WLAN:**

The carrier spacing is 5 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2407.0 + 5 \cdot n$

Receiving Frequency (in MHz) = $2407.0 + 5 \cdot n$

where, n : channel number ($1 \leq n \leq 11$)

Bluetooth Low Energy Mode:

The carrier spacing is 2 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2402.0 + 2 \cdot n$

Receiving Frequency (in MHz) = $2402.0 + 2 \cdot n$

where, n : channel number ($0 \leq n \leq 39$)

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.

Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

☒ - The test result was **passed** for the test requirements of the applied standard.

☐ - The test result was **failed** for the test requirements of the applied standard.

☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Assistant Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.10–2009
Testing unlicensed wireless devices.

KDB 558074 D01
DTS Meas Guidance v03r02: June 5, 2014.

KDB 662911 D01
Multiple Transmitter Output v02r01: October 31, 2013

4 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2016)
VCCI Registration No. : A-0002 (Expiry date : March 30, 2016)
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2016)
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Details of the Equipment Under Test

6.1 Operating Condition

Transmitting/Receiving

WLAN:

Transmitting frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Receiver frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Bluetooth Low Energy Mode(Bluetooth 4.0 + EDR + LE):

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Modulation Type

1. 802.11b : DSSS

2. 802.11g : OFDM

3. 802.11n : OFDM

4. LE Packet (Modulation Type : GFSK)

The equipment has two antennas(ANT0/ANT1) in the WLAN mode, and uses the MIMO technology.

This equipment works in 1TX(ANT0) and 2TX(ANT0+ANT1) mode.

Therefore, the radiated emission tests were carried out in the following mode.

a) 1TX (ANT0)

b) 2TX (ANT0+ANT1)

In 1TX mode and 2TX mode, the output level in each antenna is the same.

Other Clock Frequency

19.2MHz, 48MHz, 12MHz, 27.12MHz

The tests were performed in the following worst condition.

Mode	Condition
IEEE802.11b	2 Mbps
IEEE802.11g	48 Mbps
IEEE802.11n	MCS4 (39 Mbps)

Note: The worst condition was determined based on the test result of Maximum Peak Output Power(Mid channel).(ANT0)

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

DIRECTIONAL ANTENNA GAIN

For Power: The TX chains are uncorrelated and the antenna gain is the same for each chain. The directional gain is equal to the antenna gain.

ANT0 Antenna Gain [dBi]	ANT1 Antenna Gain [dBi]	Uncorrelated Chains Directional Gain [dBi]
0.00	0.00	0.00

For PSD: The TX chains are correlated. The directional gain is:

ANT0 Antenna Gain [dBi]	ANT1 Antenna Gain [dBi]	Correlated Chains Directional Gain [dBi]
0.00	0.00	3.01

6.2 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Smart Phone	Sharp	SH-03G	004401115391506*1) 004401115391514*2)	APYHRO00217
B	AC Adapter	Fujitsu Corporation	05	XFA	N/A
C	Stereo Handsfree	Sharp	SHLDL1	--	N/A
D	DTV Antenna	Sharp	SH01	--	N/A

*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable	--	--	NO	YES	1.2
2	Handsfree Cable	--	--	NO	NO	1.5
3	DTV Antenna Cable	--	--	NO	NO	0.3

6.3 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

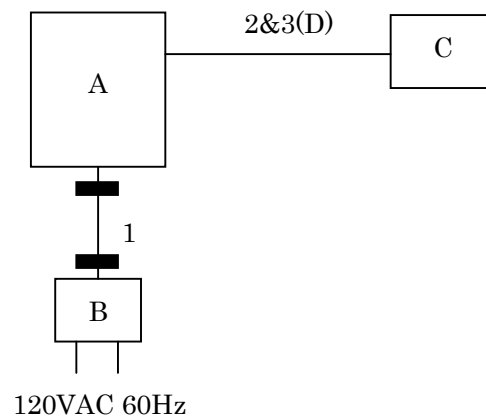

c) Earphone used

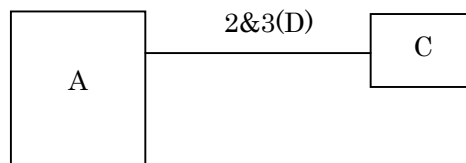

 : Ferrite Core

7 Details of the Test Item

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.12	Passed	-
Channel Separation	Section 15.247(a)(1)	-	-	-
Minimum Hopping Channel	Section 15.247(a)(1)(iii)	-	-	-
Occupied Bandwidth	Section 15.247(a)(2)	Section 7.3	Passed	-
Dwell Time	Section 15.247(a)(1)(iii)	-	-	-
Peak Output Power (Conduction)	Section 15.247(b)(3)	Section 7.5	Passed	-
Peak Power Density (Conduction)	Section 15.247(e)	Section 7.6	Passed	-
Spurious Emissions (Conduction)	Section 15.247(d)	Section 7.7	Passed	-
AC Powerline Conducted Emission	Section 15.207	Section 7.8	Passed	-
Radiated Emission	Section 15.247(d)	Section 7.9	Passed	-

7.1 Channel Separation

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.2 Minimum Hopping Channel

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.3 Occupied Bandwidth

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.3.1 Worst Point and Measurement Uncertainty

The 99% Bandwidth of IEEE802.11b is	<u>13.133</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of IEEE802.11g is	<u>16.458</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of IEEE802.11n is	<u>17.655</u>	MHz	at	<u>2437.0</u>	MHz
The 99% Bandwidth of Bluetooth LE is	<u>1096.7</u>	kHz	at	<u>2402.0</u>	MHz

The 6dB Bandwidth of IEEE802.11b is	<u>8.091</u>	MHz	at	<u>2412.0</u>	MHz
The 6dB Bandwidth of IEEE802.11g is	<u>16.525</u>	MHz	at	<u>2437.0</u>	MHz
The 6dB Bandwidth of IEEE802.11n is	<u>17.718</u>	MHz	at	<u>2462.0</u>	MHz
The 6dB Bandwidth of Bluetooth LE is	<u>673.7</u>	kHz	at	<u>2402.0</u>	MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)


Remarks : _____

7.3.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

	WLAN	Bluetooth
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Span	30 MHz	3 MHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold

7.3.4 Test Data

Mode of EUT : WLAN

Test Date : March 10, 2015


Temp.:22°C, Humi:31%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

A) IEEE 802.11b

1) Antenna 1 (ANT0)


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	12.952	8.091	500
06	2437.0	12.997	7.771	500
11	2462.0	13.001	8.010	500

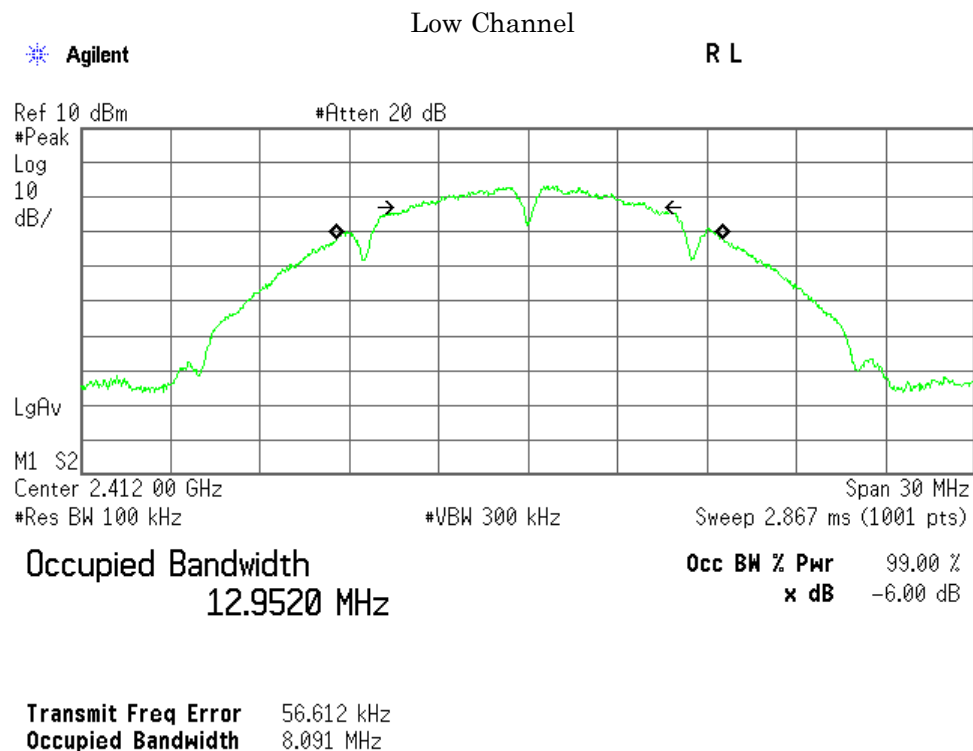

Middle Channel

Agilent

R T

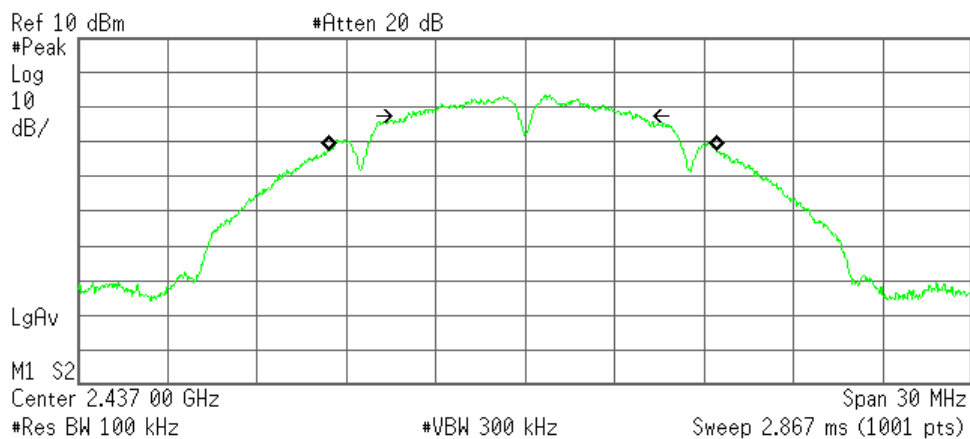

Occupied Bandwidth
12.9965 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -86.295 kHz
Occupied Bandwidth 7.771 MHz

High Channel

Agilent

R L

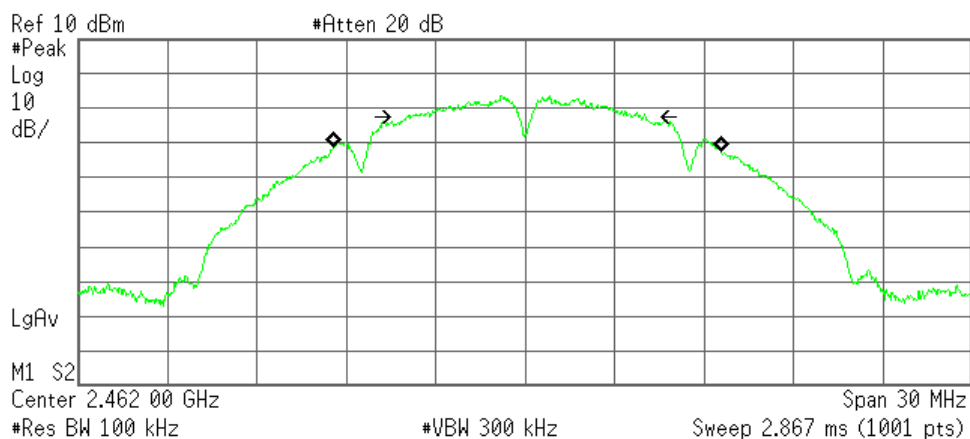


Occupied Bandwidth
13.0007 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 72.688 kHz
Occupied Bandwidth 8.010 MHz

2) Antenna 2 (ANT1)


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	12.897	7.618	500
06	2437.0	13.133	8.002	500
11	2462.0	13.052	7.564	500

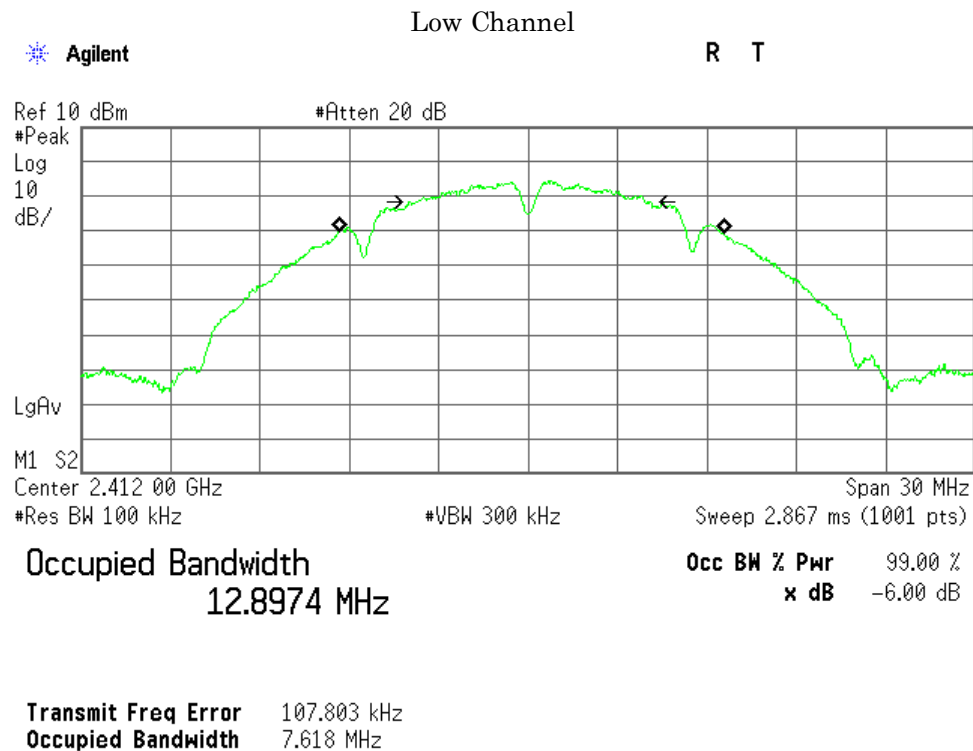

Middle Channel

Agilent

R T

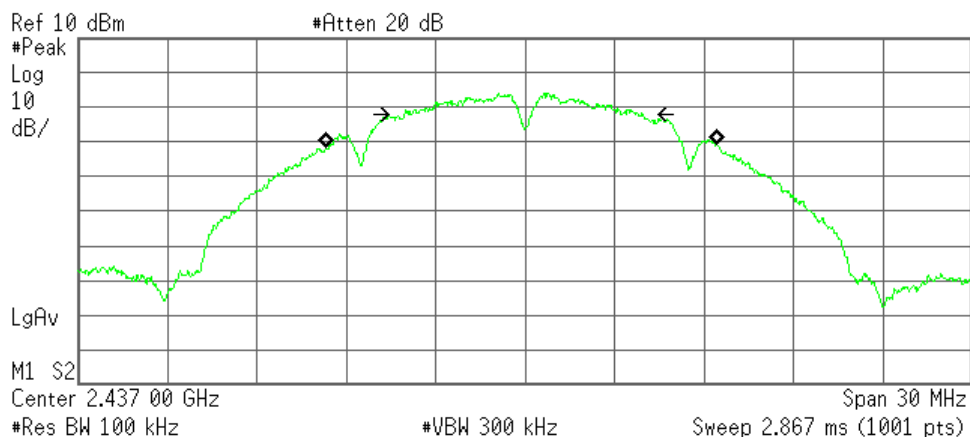

Occupied Bandwidth
13.1330 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -122.555 kHz
Occupied Bandwidth 8.002 MHz

High Channel

Agilent

R L

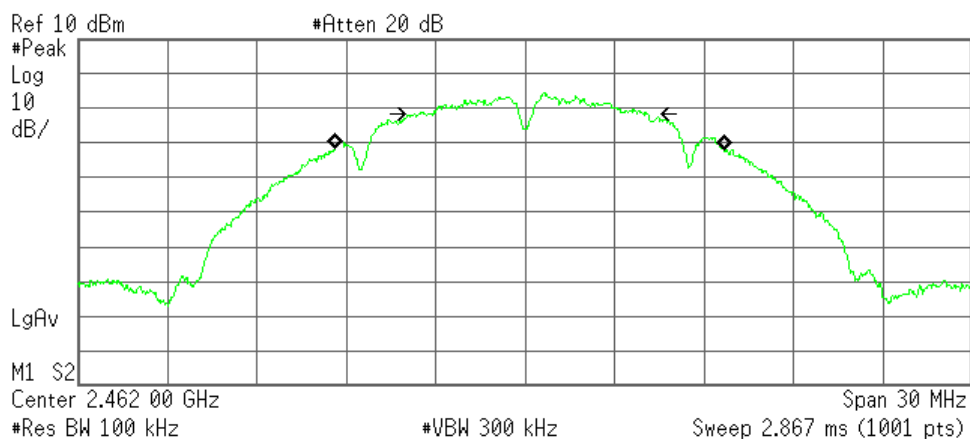

Occupied Bandwidth
13.0521 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 157.821 kHz
Occupied Bandwidth 7.564 MHz

Test Date : March 10, 2015
Temp.:22°C, Humi:30%

B) IEEE 802.11g


1) Antenna 1 (ANT0)

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	16.430	16.510	500
06	2437.0	16.458	16.525	500
11	2462.0	16.451	16.494	500

Low Channel

Agilent

R T

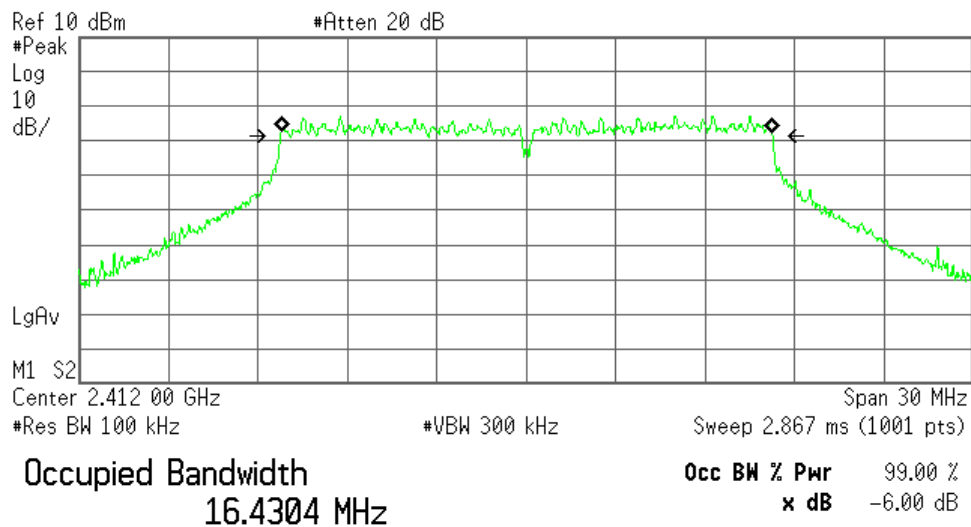


Transmit Freq Error 17.763 kHz
Occupied Bandwidth 16.510 MHz

Middle Channel

Agilent

R L

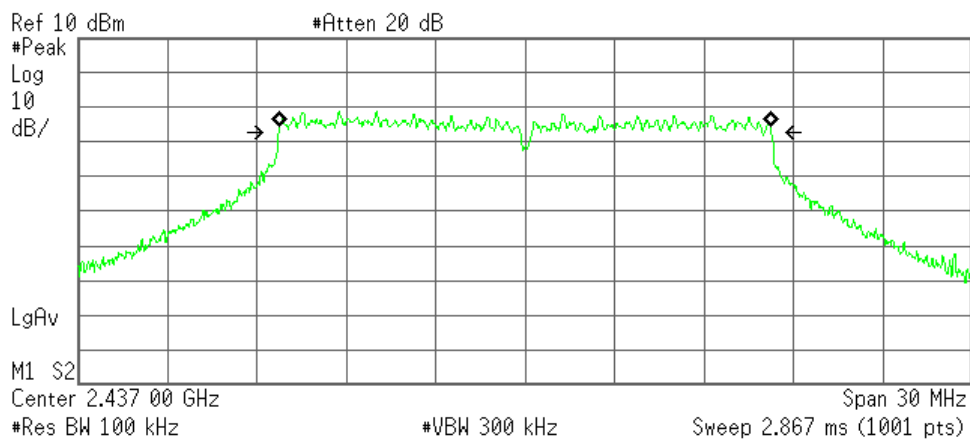

Occupied Bandwidth
16.4582 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -6.491 kHz
Occupied Bandwidth 16.525 MHz

High Channel

Agilent

R T

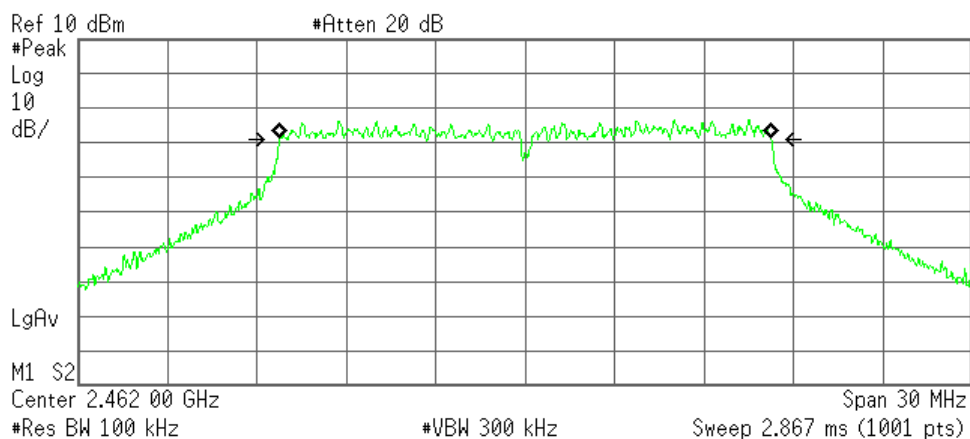


Occupied Bandwidth
16.4514 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 19.432 kHz
Occupied Bandwidth 16.494 MHz

2) Antenna 2 (ANT1)


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	16.427	16.452	500
06	2437.0	16.440	16.472	500
11	2462.0	16.433	16.466	500

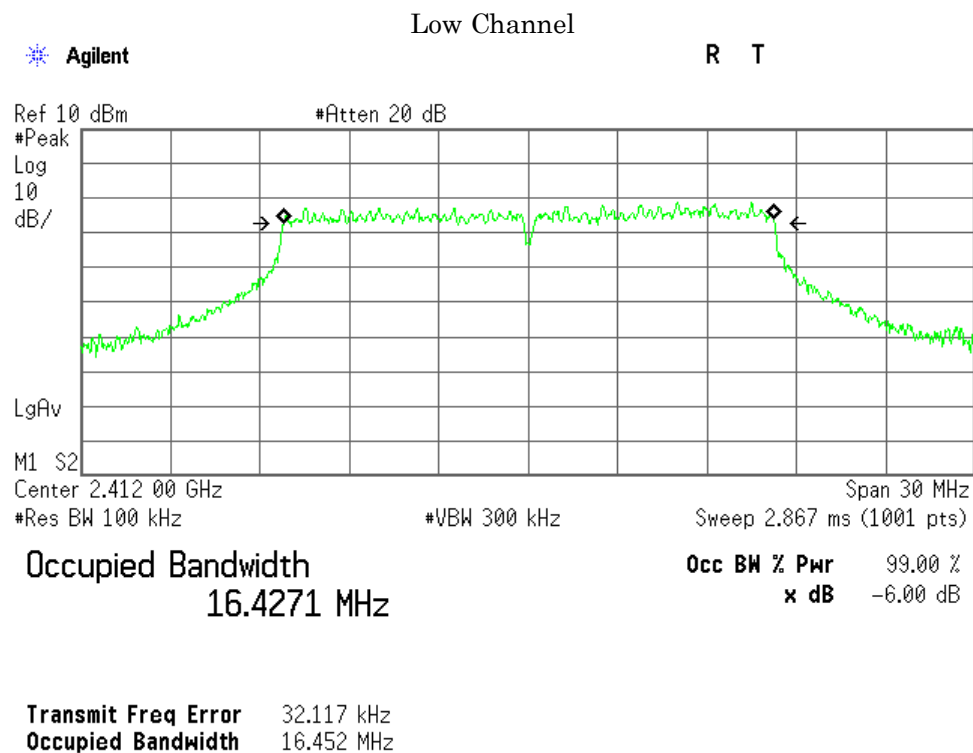

Middle Channel

Agilent

R L

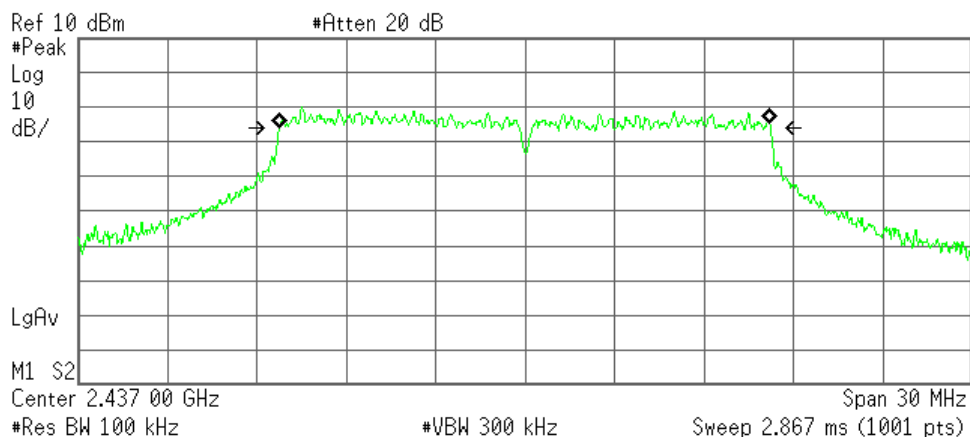

Occupied Bandwidth
16.4400 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -20.154 kHz
Occupied Bandwidth 16.472 MHz

High Channel

Agilent

R L

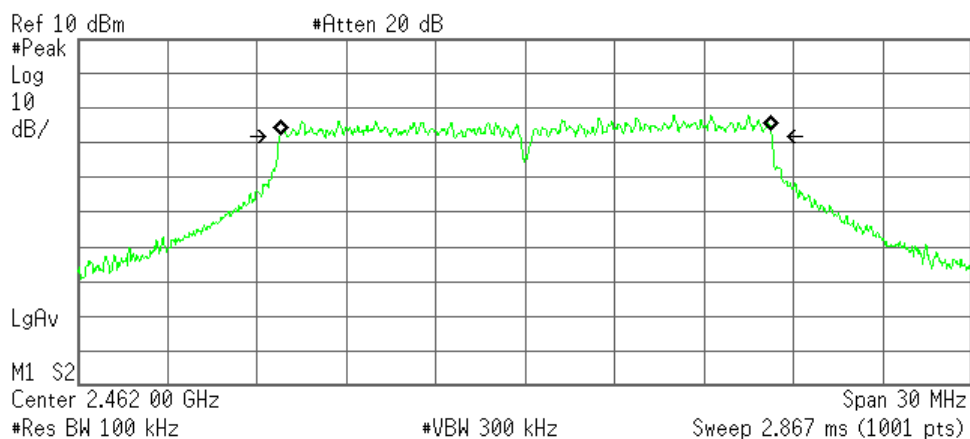

Occupied Bandwidth
16.4329 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB



Transmit Freq Error 28.059 kHz
Occupied Bandwidth 16.466 MHz

C) IEEE 802.11n

1) Antenna 1 (ANT0)


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	17.628	17.690	500
06	2437.0	17.634	17.657	500
11	2462.0	17.645	17.706	500


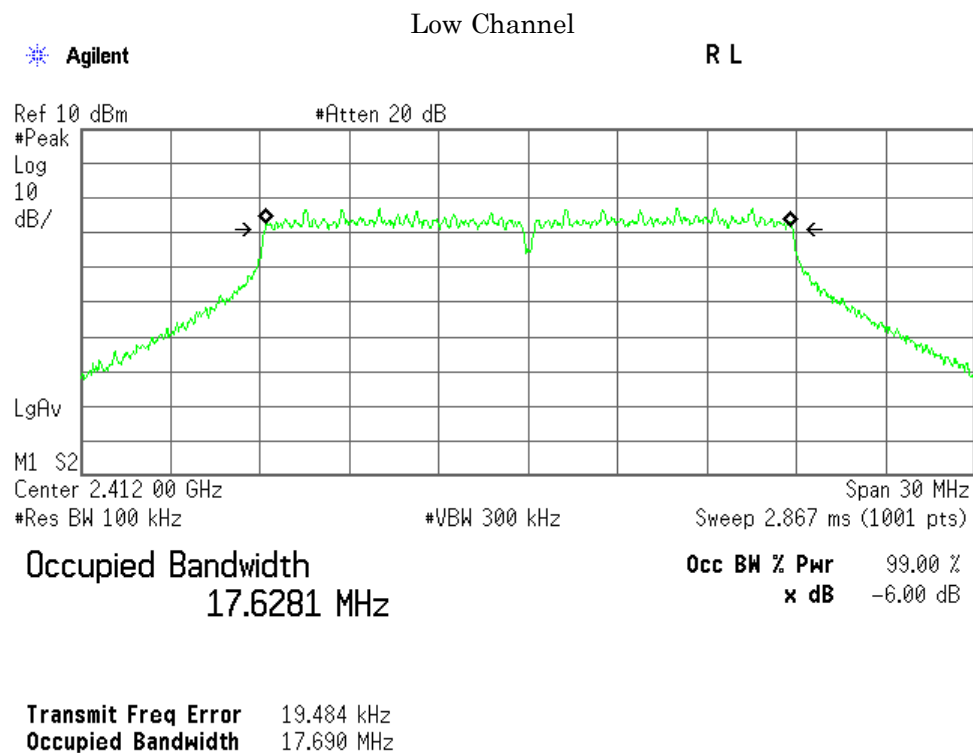


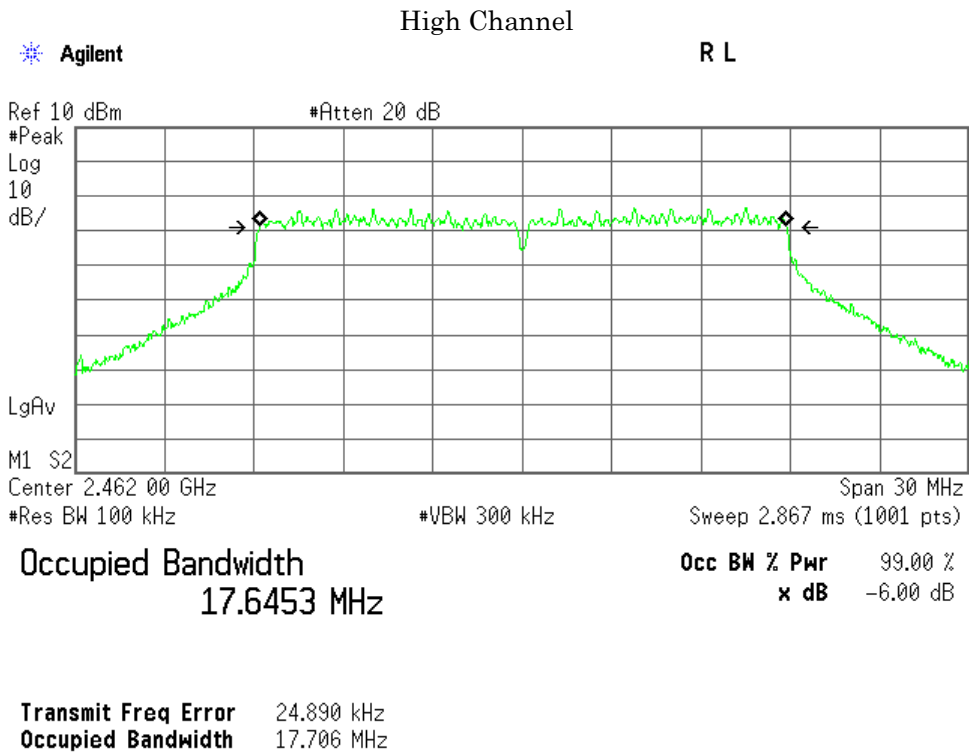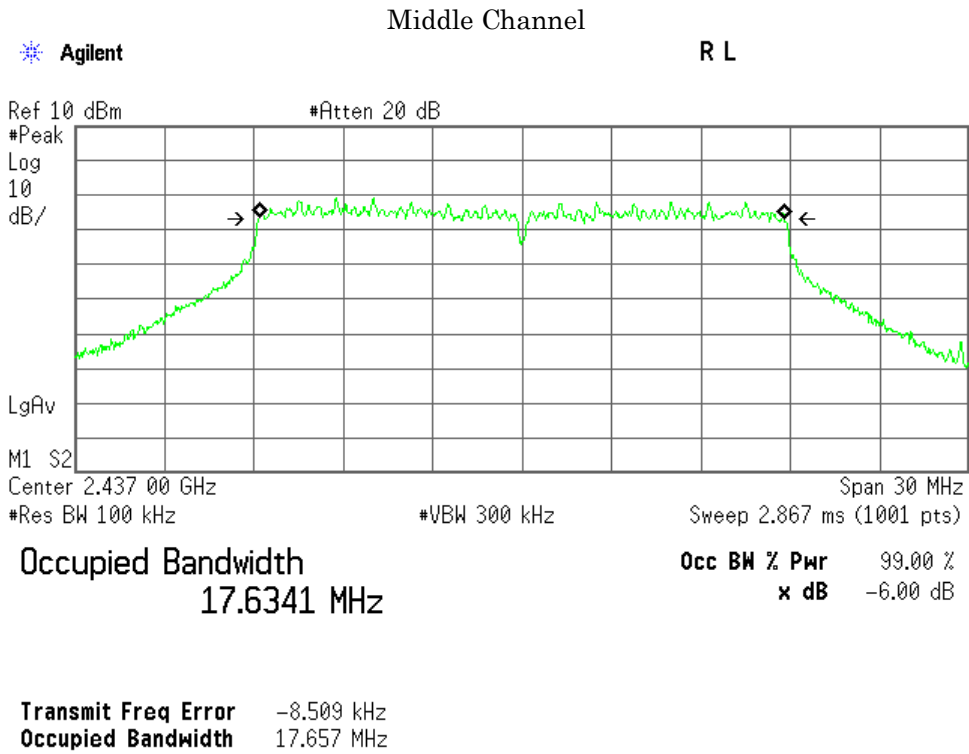

2) Antenna 2 (ANT1)

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
01	2412.0	17.645	17.709	500
06	2437.0	17.655	17.687	500
11	2462.0	17.646	17.718	500

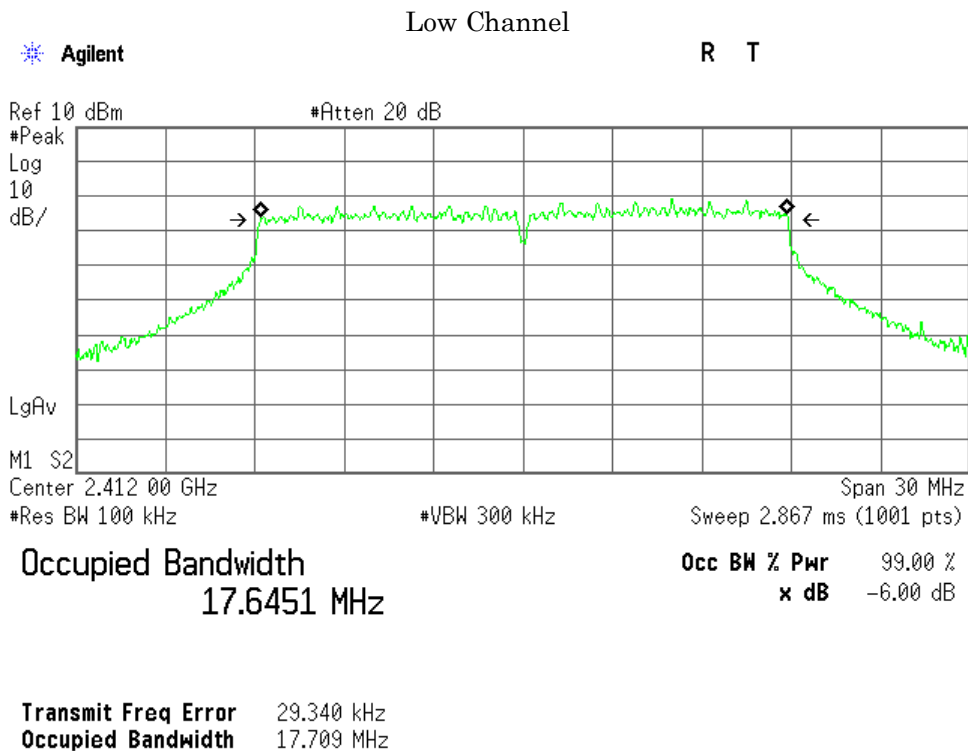

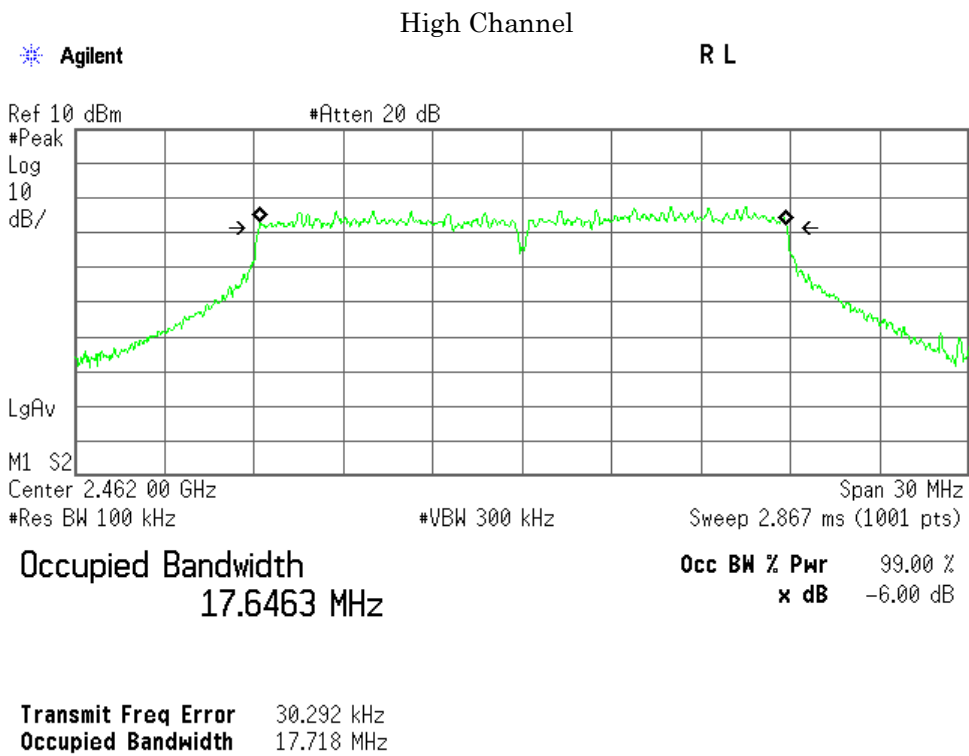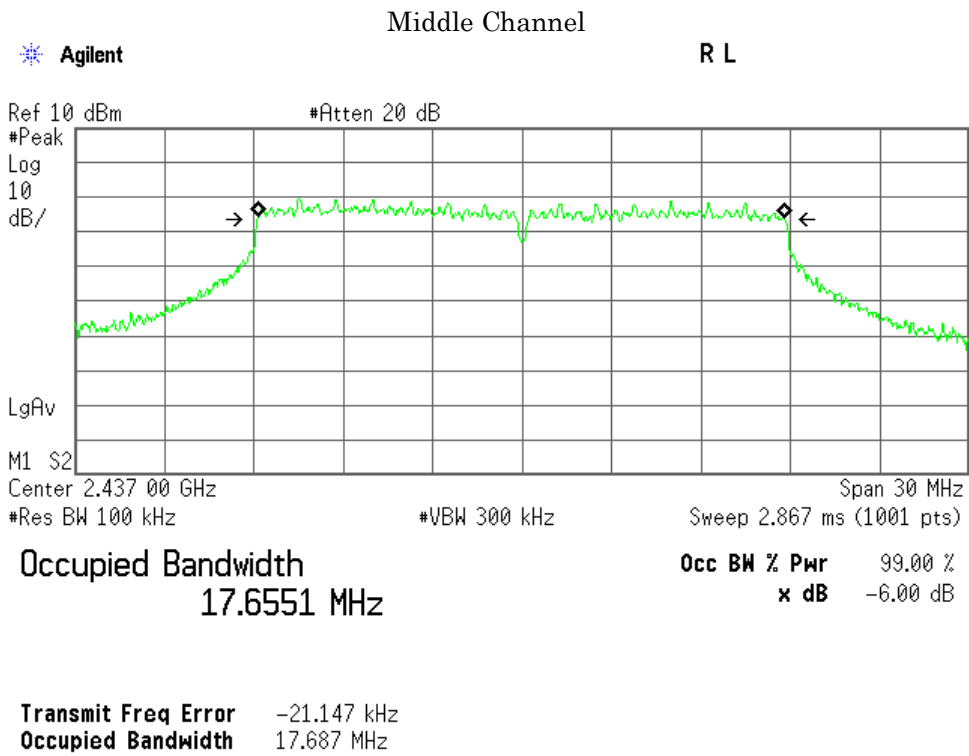

Mode of EUT : Bluetooth Low Energy

Test Date : March 11, 2015

Temp.:22°C, Humi:23%

The resolution bandwidth was set to 100 kHz, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

1)Packet Setting : LE (Modulation type : GFSK)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-6dBc Bandwidth (kHz)	Minimum -6dBc Bandwidth Limit (kHz)
00	2402.0	1096.7	673.7	500
19	2440.0	1094.2	671.6	500
39	2480.0	1092.8	663.6	500

1)Packet Setting : LE (Modulation type : GFSK)

Low Channel

Agilent

R L

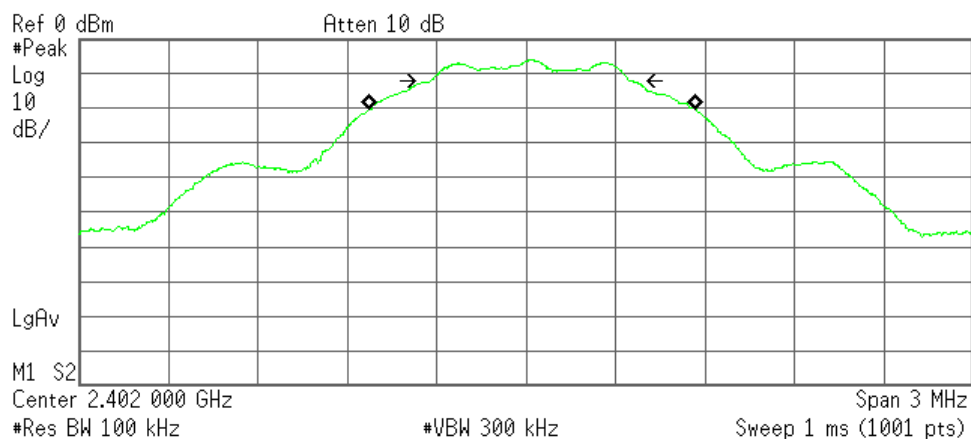

Occupied Bandwidth

1.0967 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 19.838 kHz
Occupied Bandwidth 673.667 kHz

Middle Channel

Agilent

R L

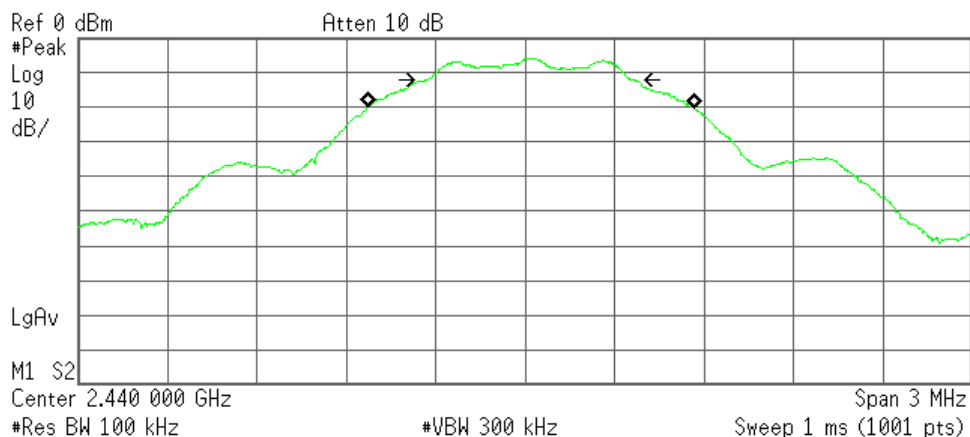

Occupied Bandwidth
1.0942 MHz


Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 20.803 kHz
Occupied Bandwidth 671.592 kHz

High Channel

Agilent

R L

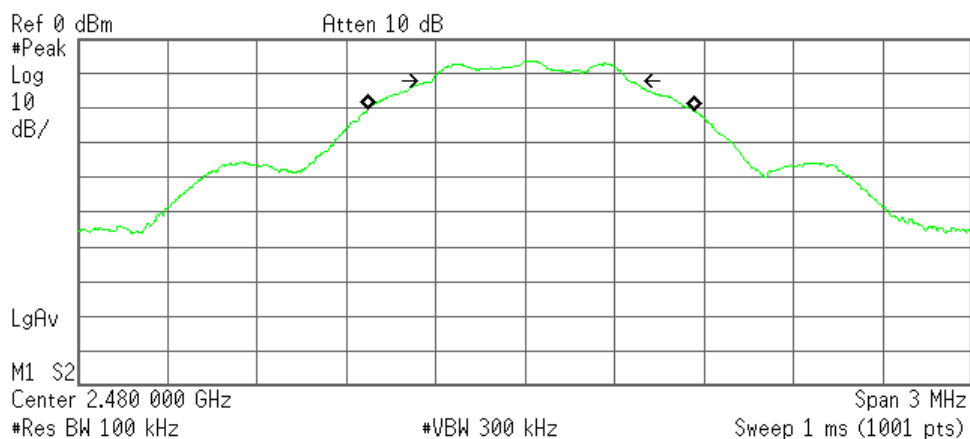

Occupied Bandwidth
1.0928 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 19.673 kHz
Occupied Bandwidth 663.611 kHz

7.4 Dwell Time

For the requirements, ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

For the limits, ☐ - Passed ☐ - Failed ☐ - Not judged

7.5 Peak Output Power(Conduction)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.5.1 Worst Point and Measurement Uncertainty

Peak Output Power of IEEE802.11b is	<u>18.32</u>	dBm	at	<u>2462.0</u>	MHz
Peak Output Power of IEEE802.11g is	<u>23.21</u>	dBm	at	<u>2437.0</u>	MHz
Peak Output Power of IEEE802.11n is	<u>22.75</u>	dBm	at	<u>2437.0</u>	MHz
Peak Output Power of Bluetooth LE is	<u>4.51</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results at Amplitude +/-0.9 dB(2 σ)


Remarks : _____

7.5.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	N1911A	Agilent	B-63	2014/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2014/7	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.



7.5.4 Test Data

1) IEEE 802.11b

Data Rate : 2Mbps

Test Date: March 6, 2015

Temp.: 22 °C, Humi: 30 %

Transmitting Frequency		Correction	Meter Reading			Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
01	2412	10.34	4.00	5.30	7.71	18.05	63.83	30.00	+11.95
06	2437	10.34	4.21	5.28	7.79	18.13	65.01	30.00	+11.87
11	2462	10.35	4.72	5.18	7.97	18.32	67.92	30.00	+11.68

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.35 dB
+) Meter Reading	=	7.97 dBm
Result	=	18.32 dBm = 67.92 mW

Minimum Margin: 30.00 - 18.32 = 11.68 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH	[MHz]	
06	2437	
Rate	Meter Reading	Remark
	[dBm]	
1Mbps	4.05	
2Mbps	4.21	*
5.5Mbps	4.13	
11Mbps	4.14	

* : Worst Rate

All comparison were performed on the same measurement condition.

2) IEEE 802.11g

Data Rate : 48Mbps

Test Date: March 18, 2015

Temp.: 22 °C, Humi: 61 %

Transmitting Frequency		Correction	Meter Reading			Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
01	2412	10.34	8.99	8.96	11.99	22.33	171.00	30.00	+ 7.67
06	2437	10.34	9.86	9.85	12.87	23.21	209.41	30.00	+ 6.79
11	2462	10.35	8.43	8.54	11.50	21.85	153.11	30.00	+ 8.15

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.34 dB
+) Meter Reading	=	12.87 dBm
Result	=	23.21 dBm = 209.41 mW

Minimum Margin: 30.00 - 23.21 = 6.79 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH
06 [MHz]
2437

Rate	Meter Reading [dBm]	Remark
6Mbps	6.26	
9Mbps	6.34	
12Mbps	6.31	
18Mbps	6.34	
24Mbps	9.76	
36Mbps	9.65	
48Mbps	9.86	*
54Mbps	9.77	

* : Worst Rate

All comparison were performed on the same measurement condition.

3) IEEE 802.11n

Data Rate : MCS4(39Mbps)

Test Date: March 18, 2015
 Temp.: 22 °C, Humi: 61 %

Transmitting Frequency		Correction	Meter Reading			Conducted		Limits	Margin
CH	[MHz]	Factor [dB]	ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Output Power [dBm]	[mW]	[dBm]	[dB]
01	2412	10.34	9.34	8.69	12.04	22.38	172.98	30.00	+ 7.62
06	2437	10.34	9.98	8.72	12.41	22.75	188.36	30.00	+ 7.25
11	2462	10.35	8.71	8.18	11.46	21.81	151.71	30.00	+ 8.19

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.34 dB
+) Meter Reading	=	12.41 dBm
Result	=	22.75 dBm = 188.36 mW

Minimum Margin: 30.00 - 22.75 = 7.25 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	OFF

CH	[MHz]	
06	2437	
Rate	Meter Reading	Remark
	[dBm]	
MCS0 (6.5Mbps)	6.10	
MCS1 (13Mbps)	6.33	
MCS2 (19.5Mbps)	6.38	
MCS3 (26Mbps)	9.84	
MCS4 (39Mbps)	9.98	*
MCS5 (52Mbps)	9.59	
MCS6 (58.5Mbps)	9.66	
MCS7 (65Mbps)	9.53	

* : Worst Rate

All comparison were performed on the same measurement condition.

4) Bluetooth LE(Modulation type : GFSK)

Test Date: March 11, 2015

Temp.: 22 °C, Humi: 23 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.34	-6.08	4.26	2.67	30.00	+25.74
19	2440	10.35	-5.84	4.51	2.82	30.00	+25.49
39	2480	10.36	-6.21	4.15	2.60	30.00	+25.85

Calculated result at 2440.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.35 dB
+) Meter Reading	=	-5.84 dBm
Result	=	4.51 dBm = 2.82 mW

Minimum Margin: 30.00 - 4.51 = 25.49 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

7.6 Peak Power Density(Conduction)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.6.1 Worst Point and Measurement Uncertainty

Peak Power Density of IEEE802.11b is	<u>-5.96</u>	dBm	at	<u>2462.0</u>	MHz
Peak Power Density of IEEE802.11g is	<u>-12.47</u>	dBm	at	<u>2437.0</u>	MHz
Peak Power Density of IEEE802.11n is	<u>-12.24</u>	dBm	at	<u>2437.0</u>	MHz
Peak Power Density of Bluetooth LE is	<u>-6.18</u>	dBm	at	<u>2440.0</u>	MHz

Uncertainty of Measurement Results at Amplitude +/-1.7 dB(2 σ)


Remarks : _____

7.6.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.



7.6.4 Test Data

1) IEEE 802.11b

Data Rate : 2Mbps

Test Date: March 10, 2015

Temp.: 22 °C, Humi: 31 %

Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading			Conducted Peak Power Density		Limits [dBm]	Margin [dB]
CH	[MHz]			ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	[dBm]	[mW]		
01	2412	10.34	-10.00	-10.31	-9.12	-6.66	-6.32	0.23	8.00	+14.32
06	2437	10.34	-10.00	-10.25	-9.20	-6.68	-6.34	0.23	8.00	+14.34
11	2462	10.35	-10.00	-9.99	-8.74	-6.31	-5.96	0.25	8.00	+13.96

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.35 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-6.31 dBm
Result	=	-5.96 dBm = 0.25 mW


Minimum Margin: 8.00 - -5.96 = 13.96 (dB)


NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log (3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :




Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

a) Antenna 1 (ANT0)

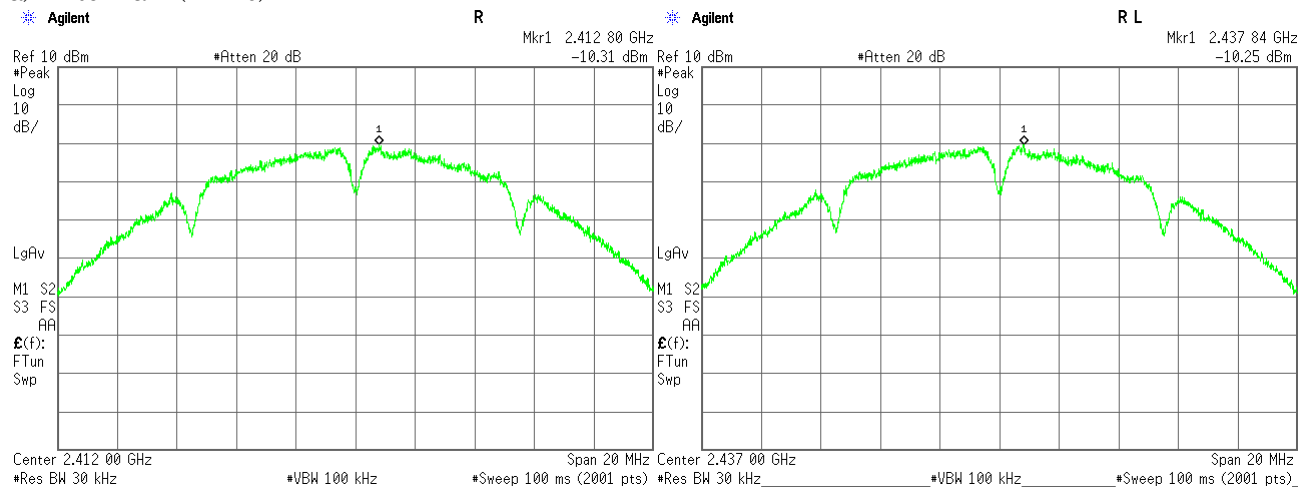

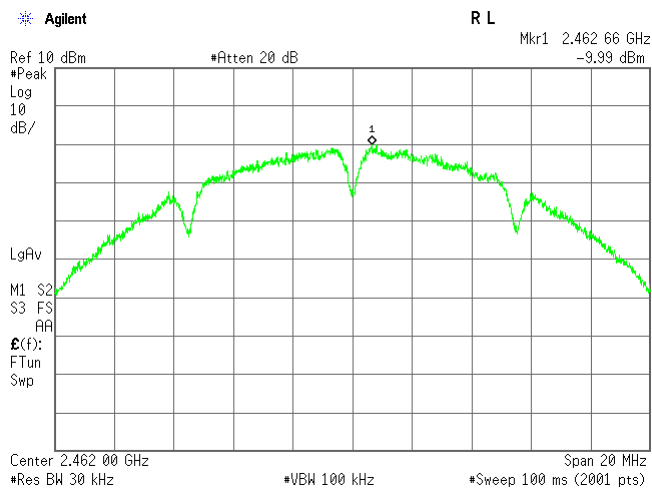

b) Antenna 2 (ANT1)

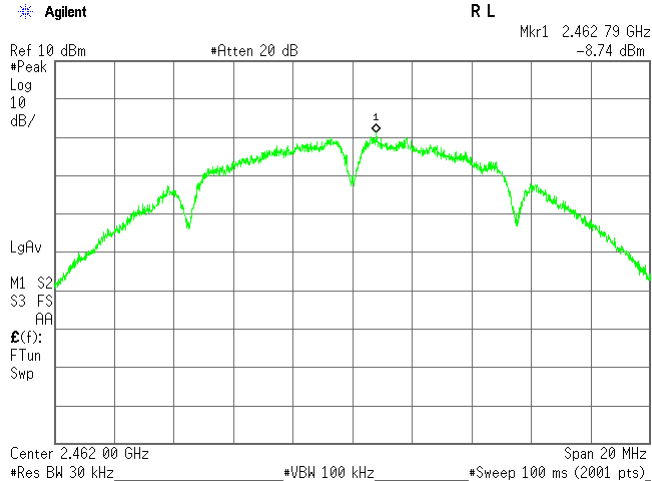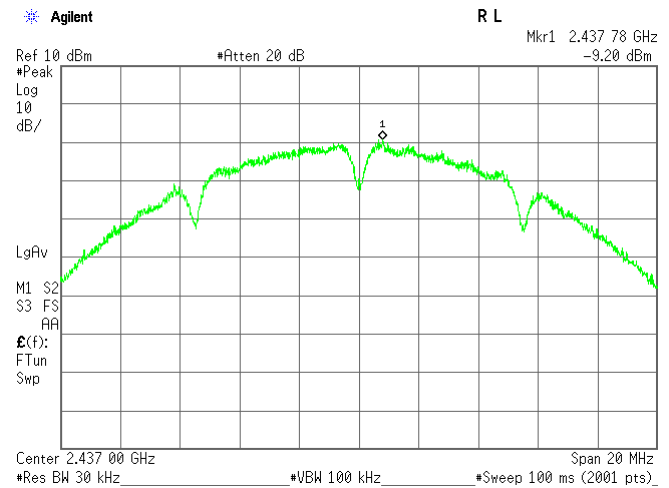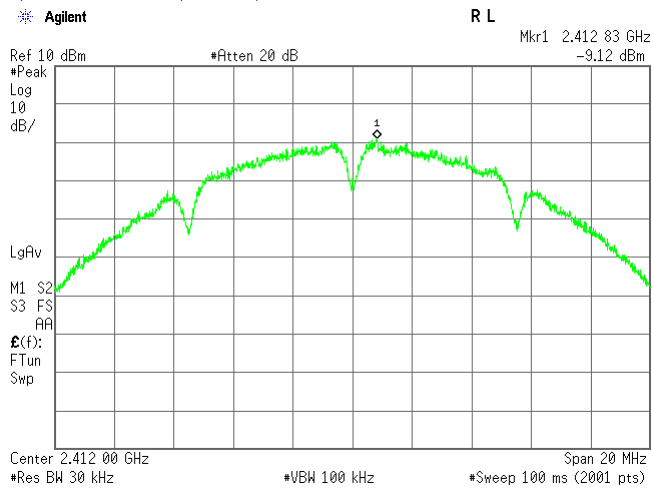

2) IEEE 802.11g

Data Rate : 48Mbps

Test Date: March 24, 2015
Temp.: 22 °C, Humi: 30 %

Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading			Conducted		Limits [dBm]	Margin [dB]
CH	[MHz]			ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Power Density [dBm]	[mW]		
01	2412	10.34	-10.00	-17.06	-16.14	-13.57	-13.23	0.05	8.00	+21.23
06	2437	10.34	-10.00	-15.91	-15.73	-12.81	-12.47	0.06	8.00	+20.47
11	2462	10.35	-10.00	-17.97	-16.82	-14.35	-14.00	0.04	8.00	+22.00

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Facto	=	10.34 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-12.81 dBm
Result	=	-12.47 dBm = 0.06 mW


Minimum Margin: 8.00 - -12.47 = 20.47 (dB)


NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log (3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :




Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

a) Antenna 1 (ANT0)

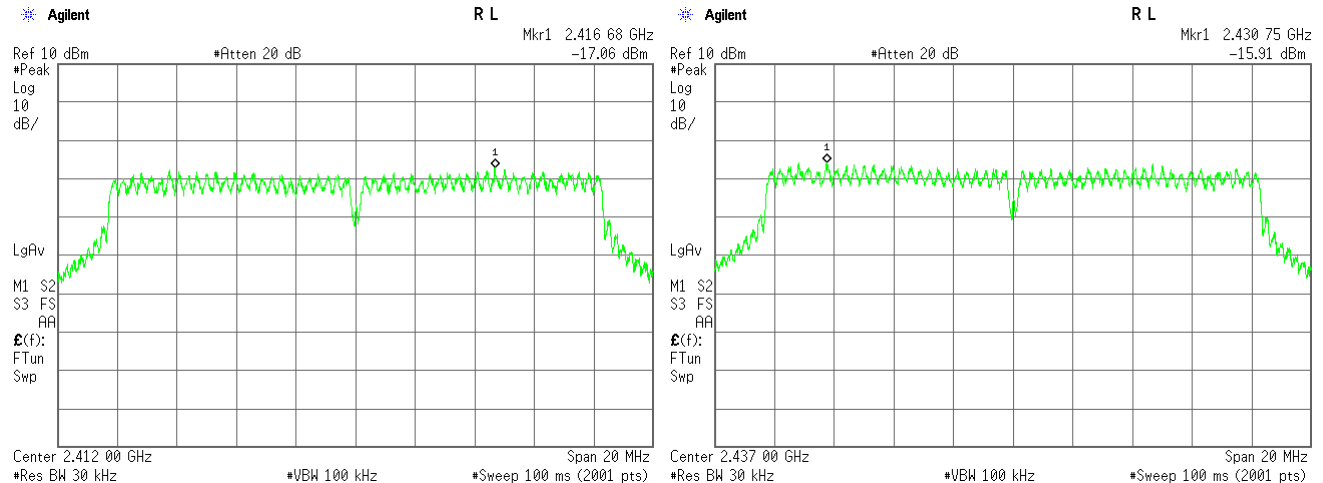

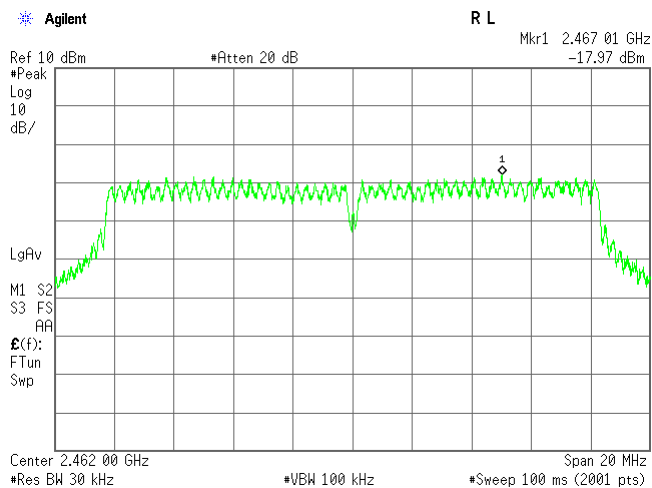

b) Antenna 2 (ANT1)

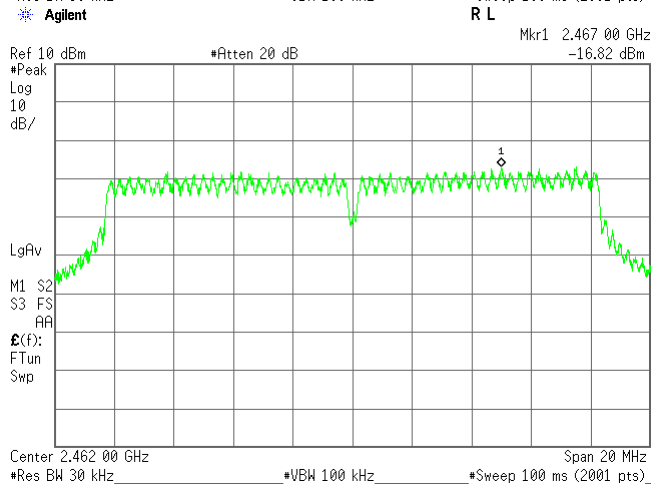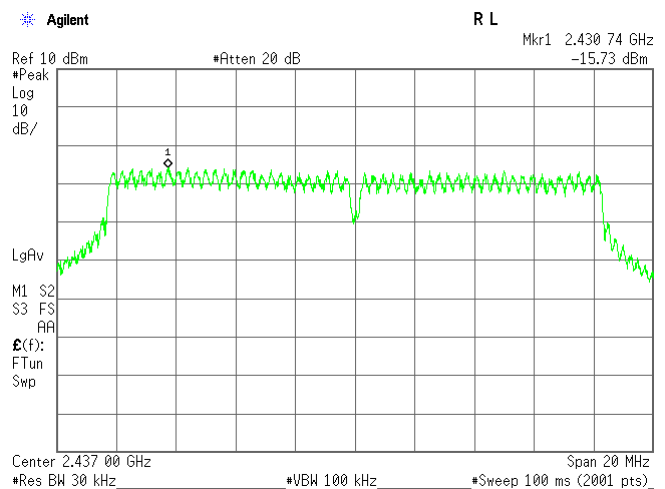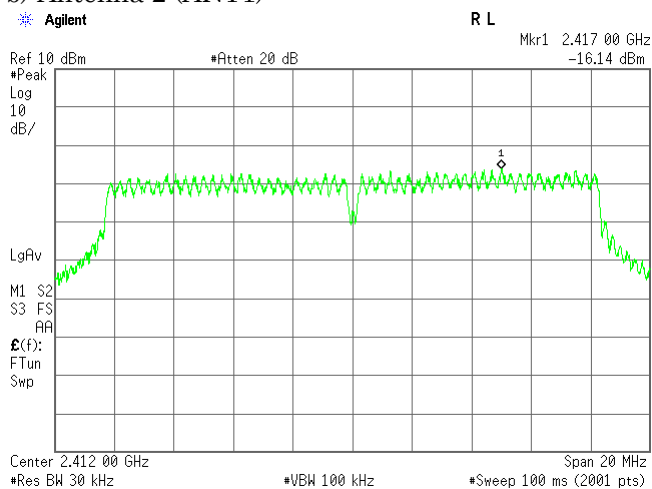

3) IEEE 802.11n

Data Rate : MCS4(39Mbps)

Test Date: March 24, 2015

Temp.: 22 °C, Humi: 30 %

Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading			Conducted		Limits [dBm]	Margin [dB]
CH	[MHz]			ANT0 [dBm]	ANT1 [dBm]	Total [dBm]	Peak Power Density [dBm]	[mW]		
01	2412	10.34	-10.00	-17.32	-15.64	-13.39	-13.05	0.05	8.00	+21.05
06	2437	10.34	-10.00	-15.85	-15.34	-12.58	-12.24	0.06	8.00	+20.24
11	2462	10.35	-10.00	-17.85	-16.38	-14.04	-13.69	0.04	8.00	+21.69

Calculated result at 2437.000 MHz, as the worst point shown on underline:

Correction Facto	=	10.34 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-12.58 dBm
Result	=	-12.24 dBm = 0.06 mW


Minimum Margin: 8.00 - -12.24 = 20.24 (dB)


NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log (3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :




Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

a) Antenna 1 (ANT0)

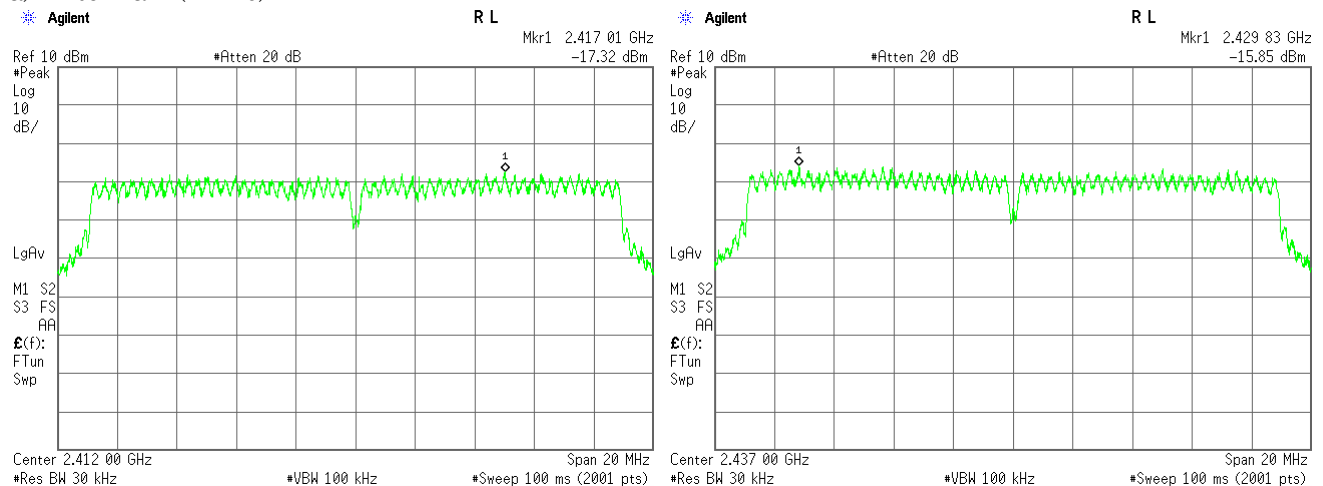

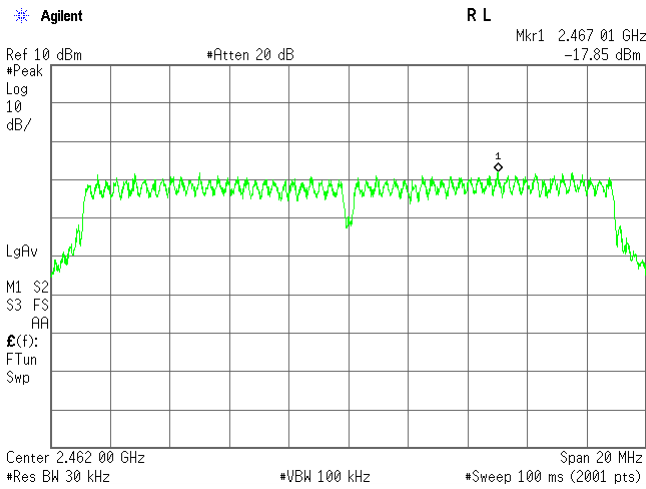

b) Antenna 2 (ANT1)

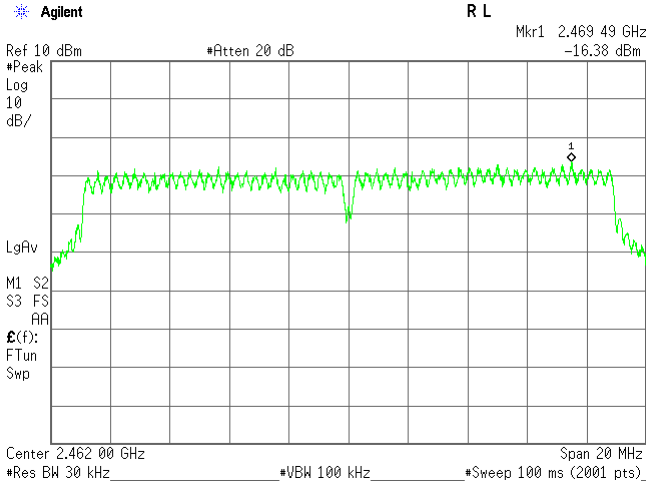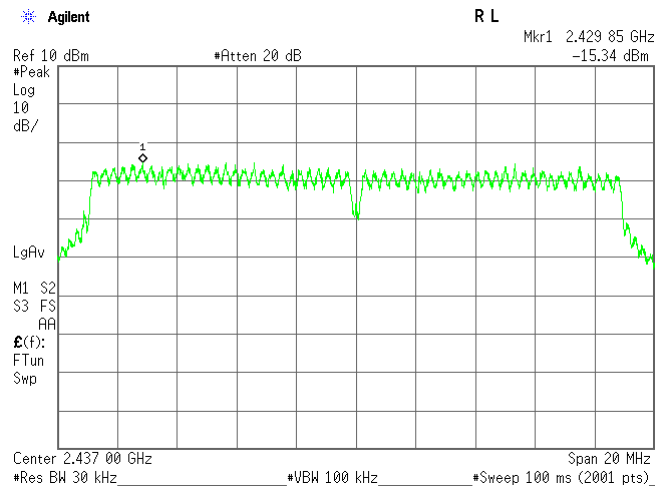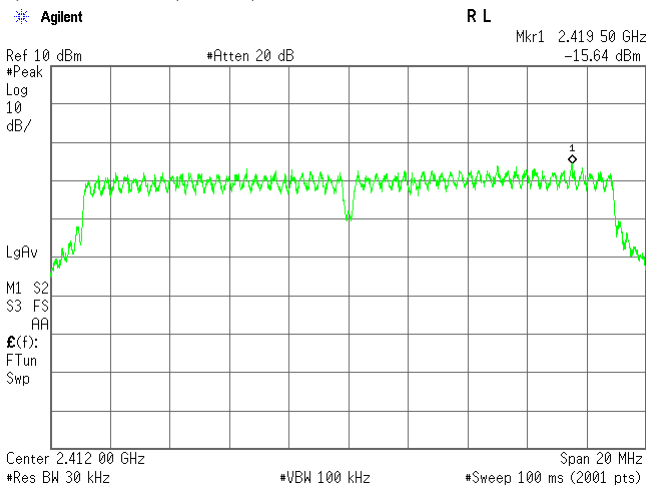

4) Bluetooth LE(Modulation type : GFSK)

Test Date: March 11, 2015

Temp.: 22 °C, Humi: 23 %

Transmitting Frequency		Correction Factor	BWCF	Meter Reading	Conducted Peak Power Density		Limits	Margin
CH	[MHz]	[dB]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.34	-10.00	-6.78	-6.44	0.23	8.00	+14.44
19	2440	10.35	-10.00	-6.53	-6.18	0.24	8.00	+14.18
39	2480	10.36	-10.00	-6.89	-6.53	0.22	8.00	+14.53

Calculated result at 2440.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.35 dB
BWCF	=	-10.00 dB
+) Meter Reading	=	-6.53 dBm
Result	=	-6.18 dBm = 0.24 mW

Minimum Margin: 8.00 - -6.18 = 14.18 (dB)

NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = $10 \log(3 \text{ kHz}/30 \text{ kHz}) = -10.0 \text{ dB}$
4. Setting of measuring instrument(s) :

Detector Function	RES.B.W.	Video B.W.
Peak	30kHz	100kHz

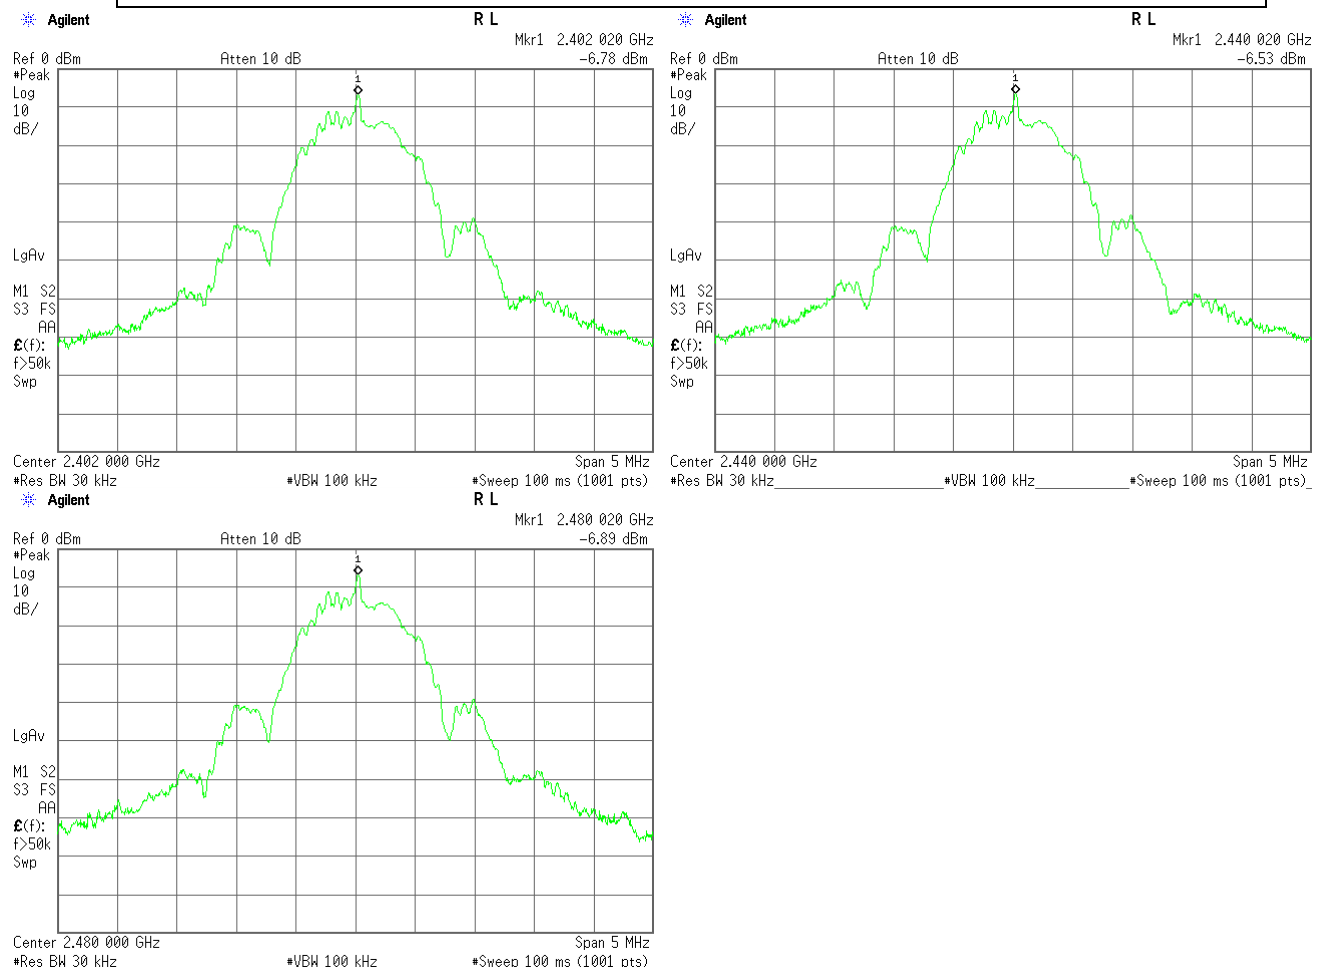

7.7 Spurious Emissions(Conduction)

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.7.1 Worst Point and Measurement Uncertainty

Uncertainty of Measurement Results	9 kHz – 1GHz	<u>+/-1.4</u>	dB(2 σ)
	1GHz – 18GHz	<u>+/-1.7</u>	dB(2 σ)
	18GHz – 40GHz	<u>+/-2.3</u>	dB(2 σ)


Remarks : _____

7.7.2 Test Instruments

Shielded Room S4					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2014/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2014/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2014/8	1 Year

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


7.7.4 Test Data

Test Date : March 10, 2015


Temp.:22°C, Humi:31%

1-1) IEEE 802.11b (ANT0)


Low Channel

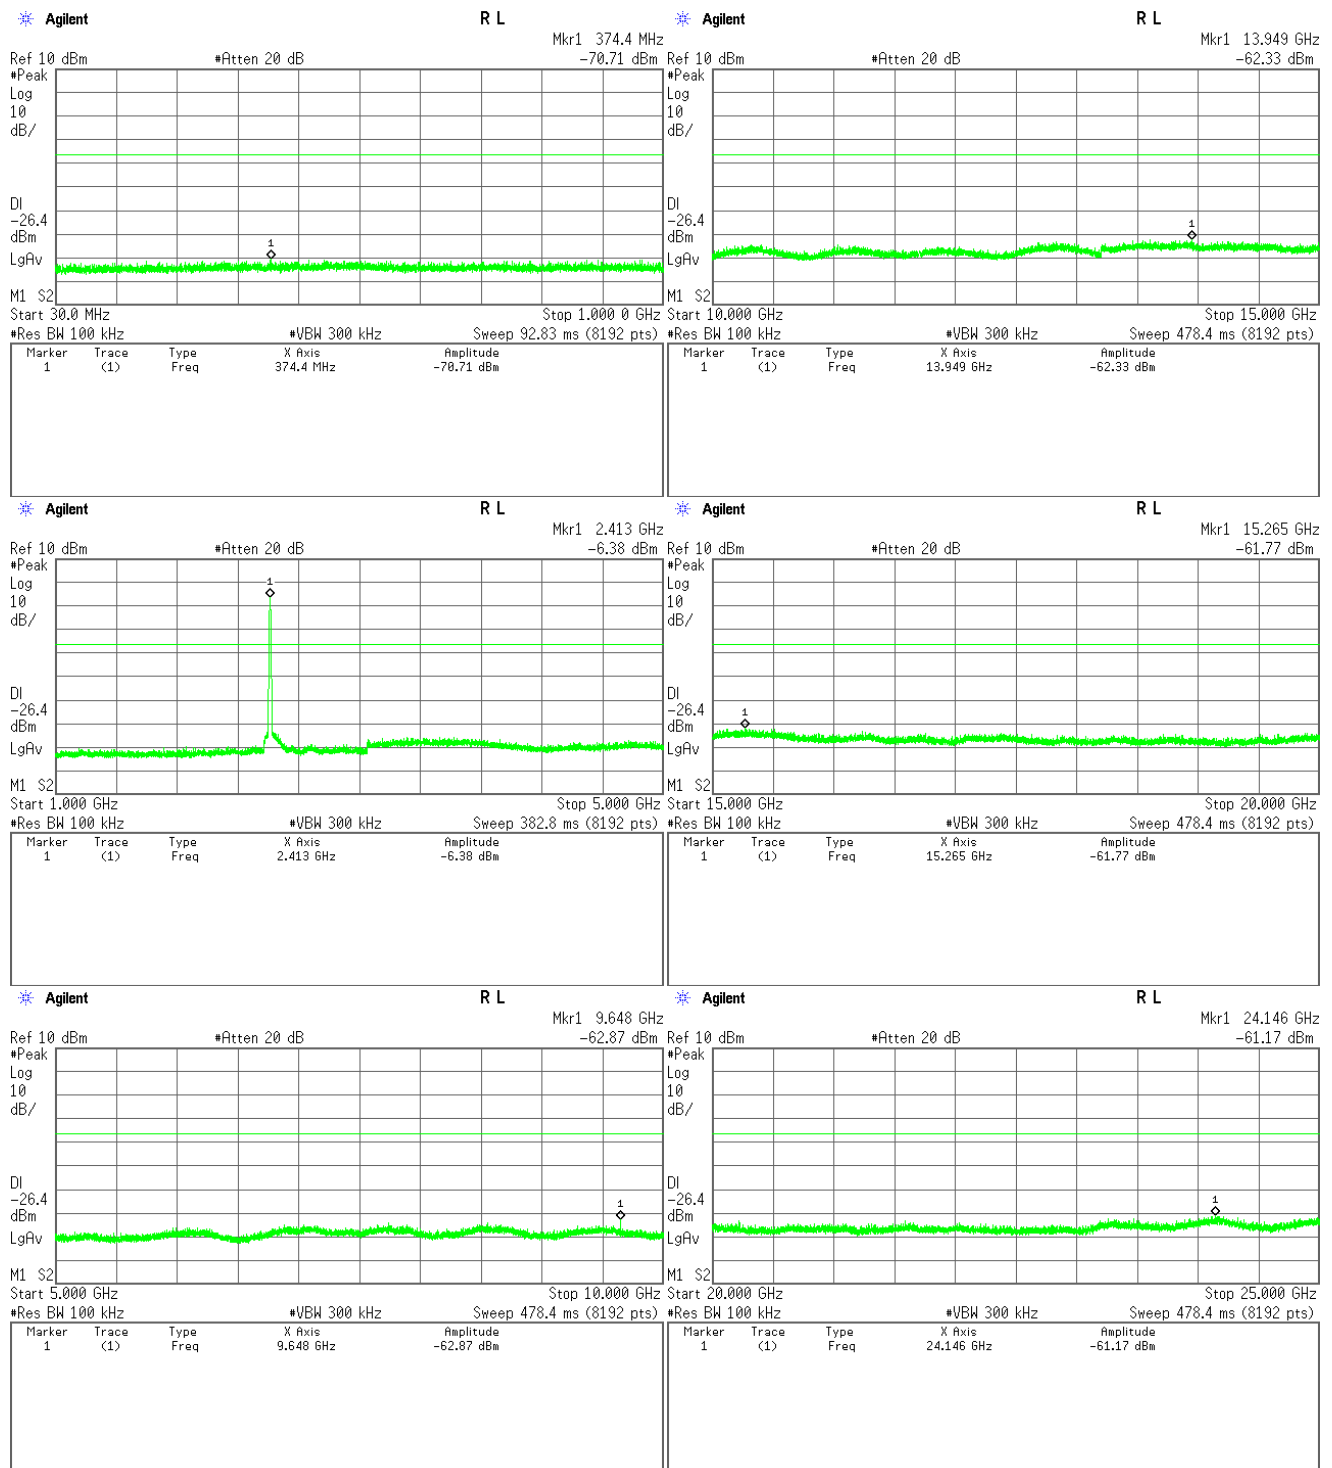

Middle Channel

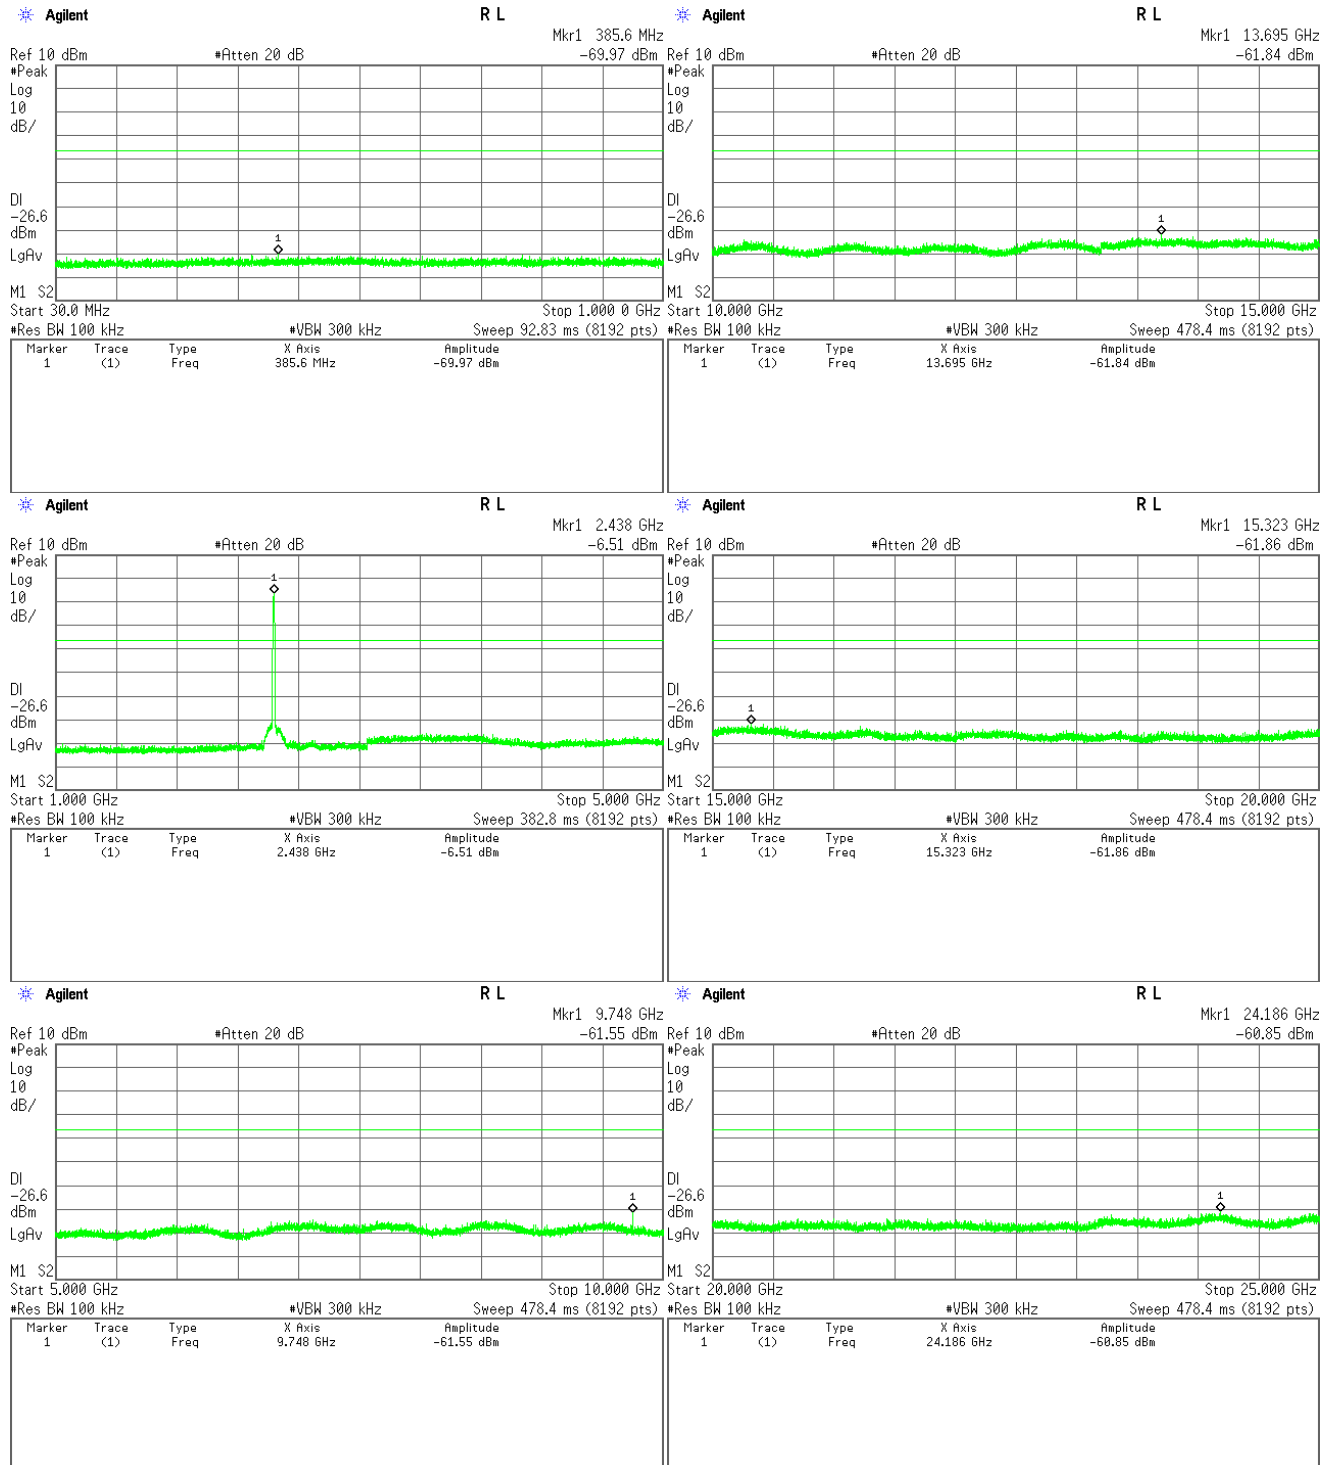


High Channel

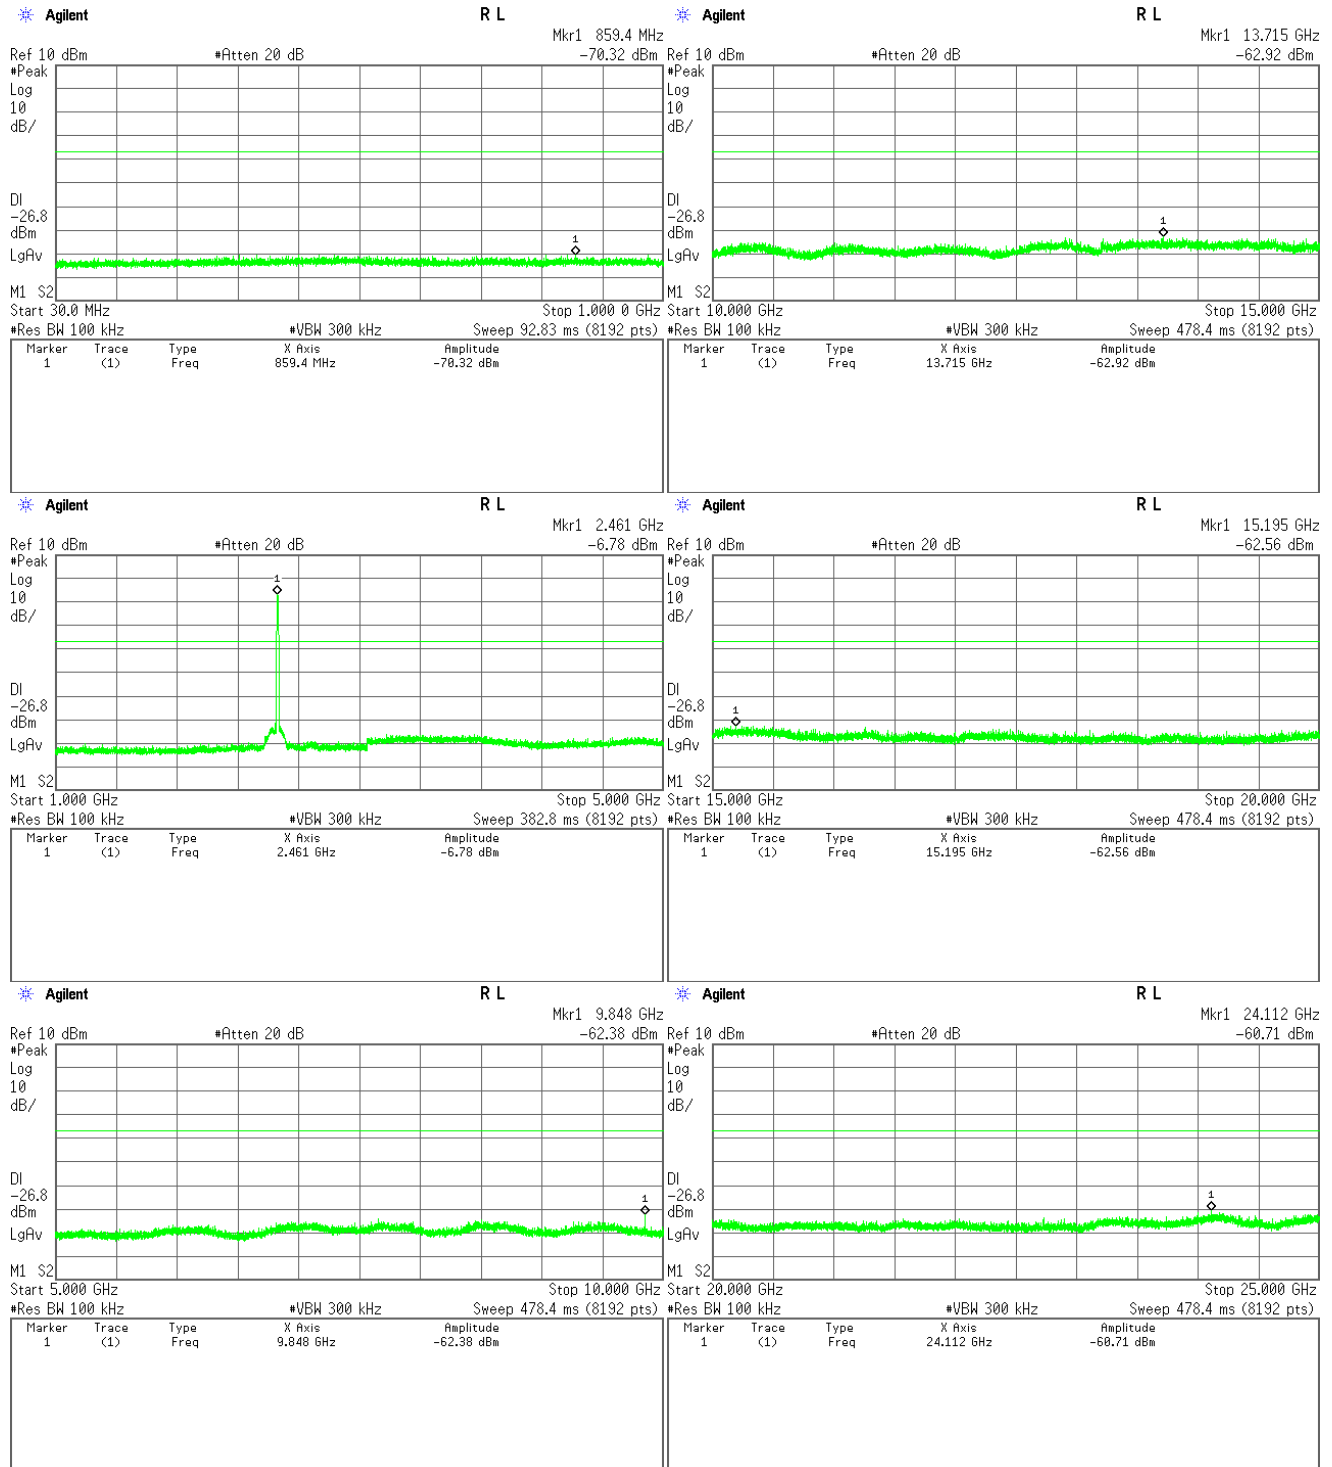


1-2) IEEE 802.11b (ANT1)


Low Channel

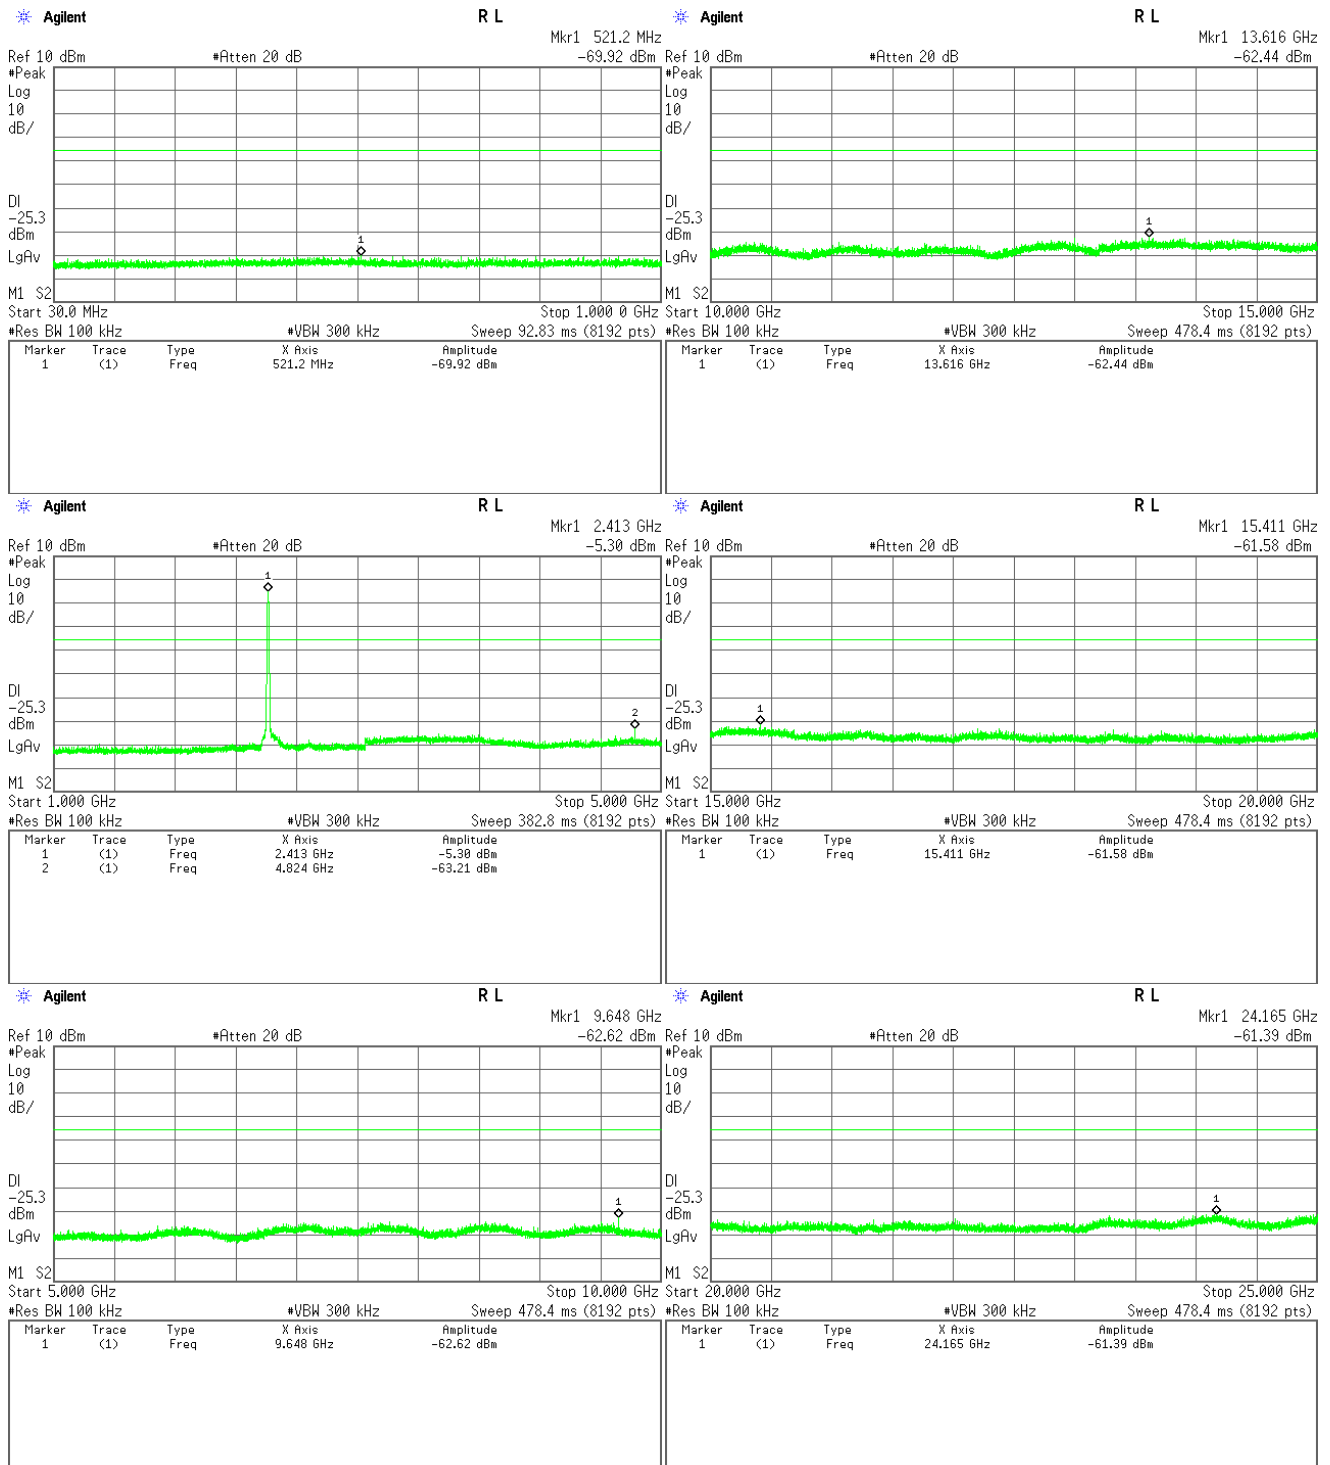

Middle Channel






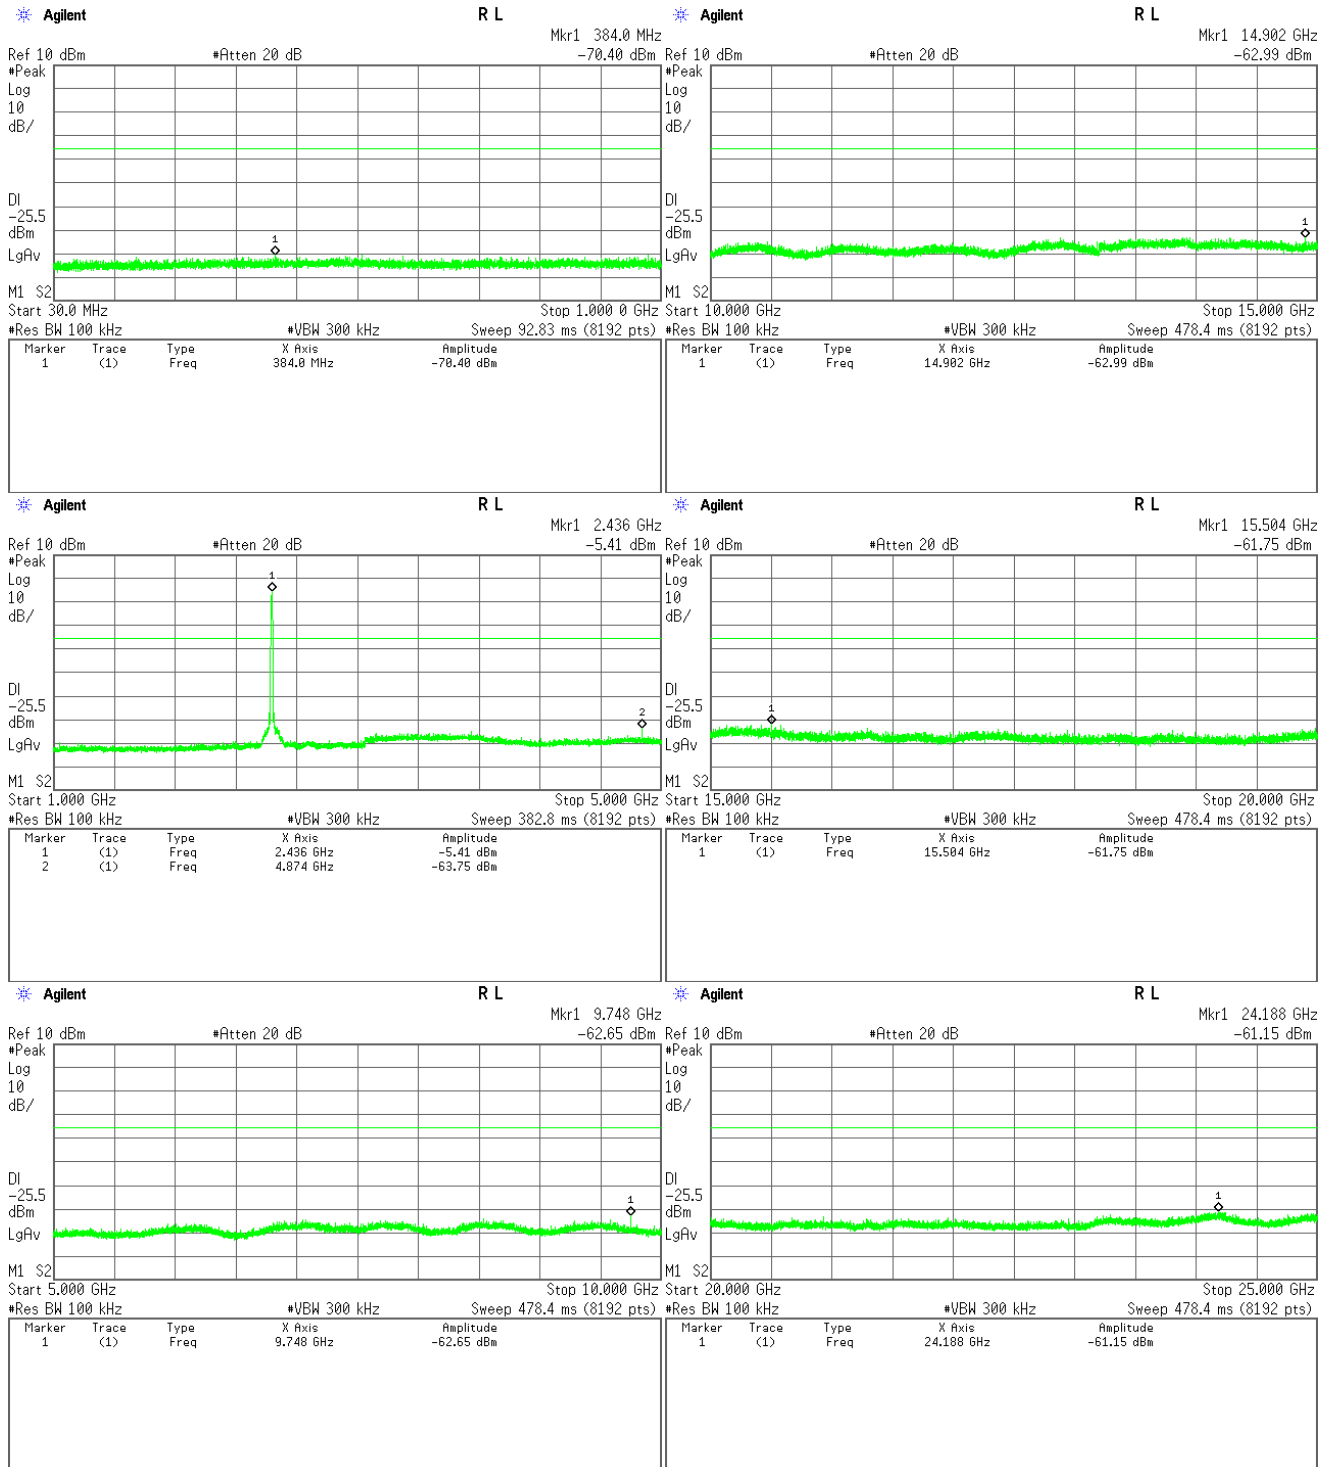


High Channel






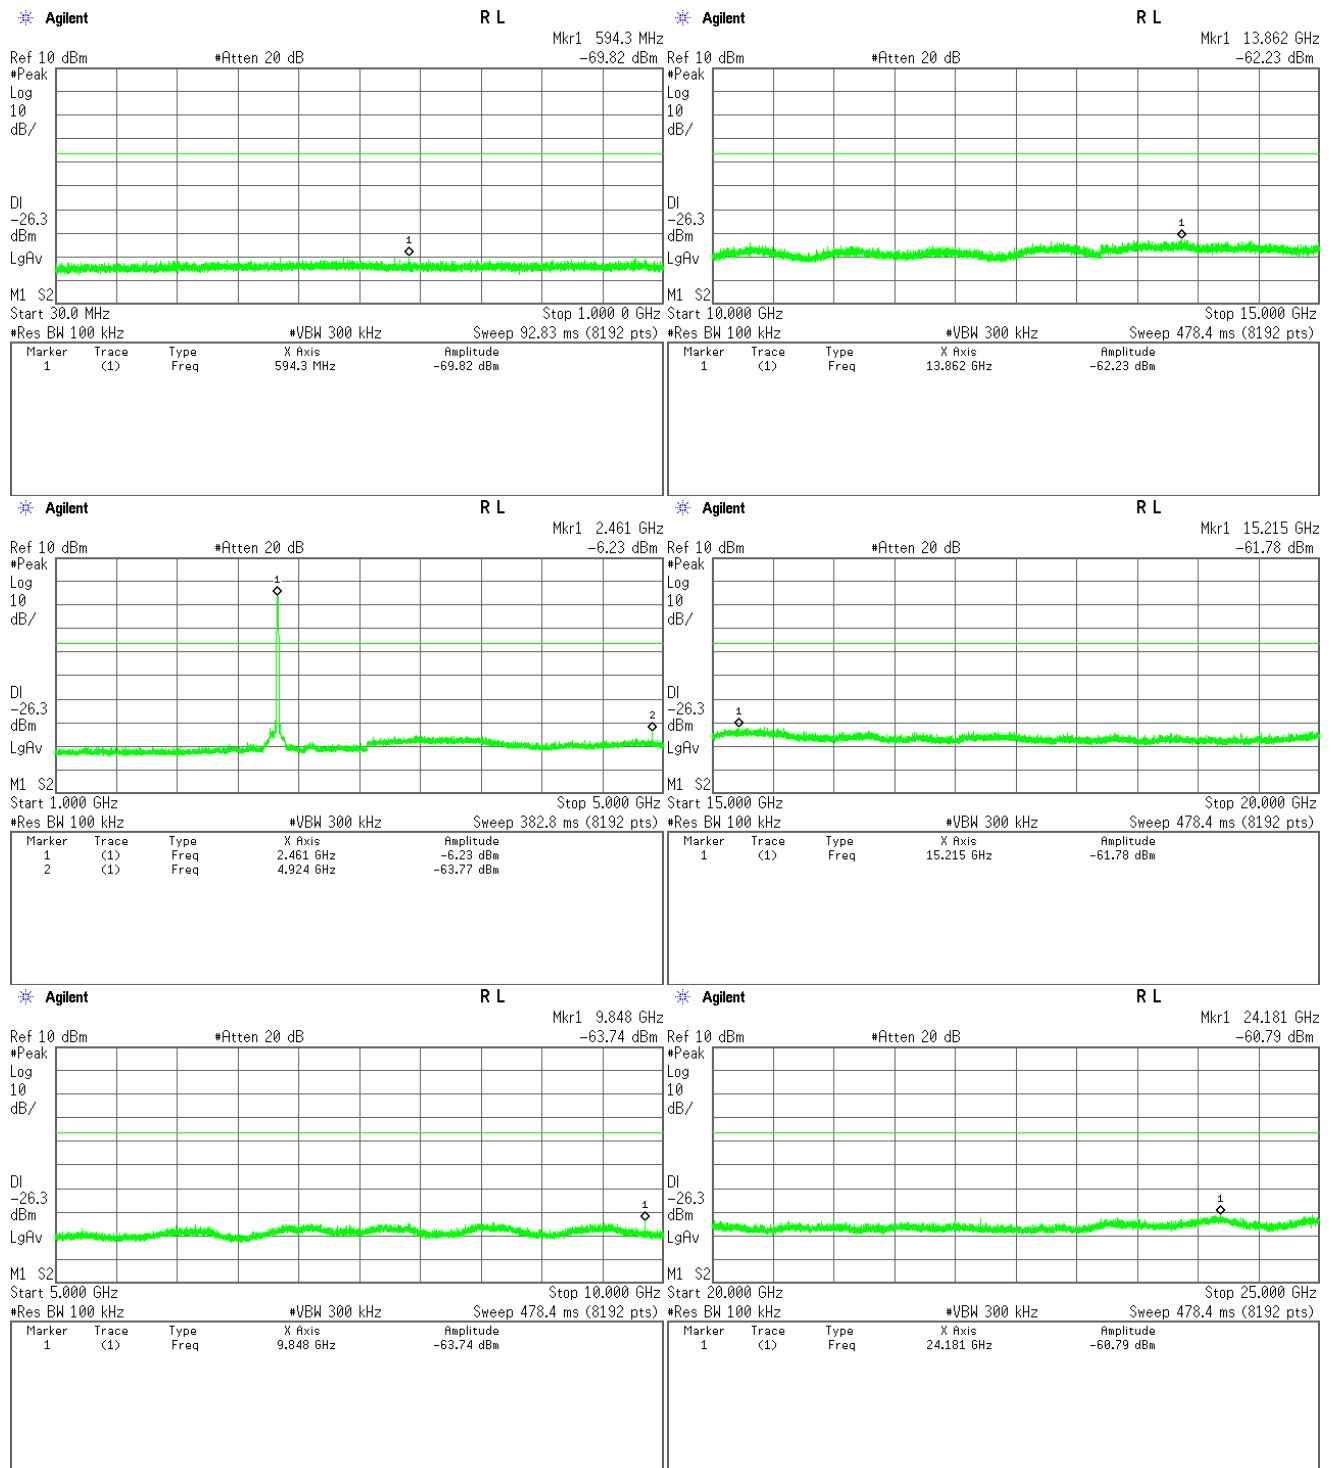


2-1) IEEE 802.11g (ANT0)







Low Channel

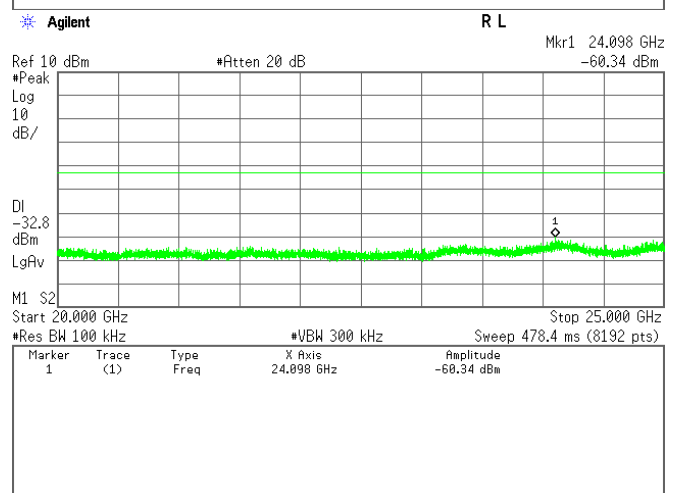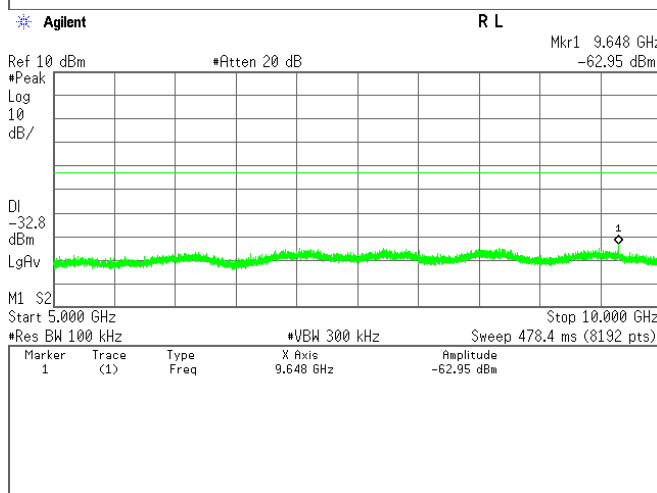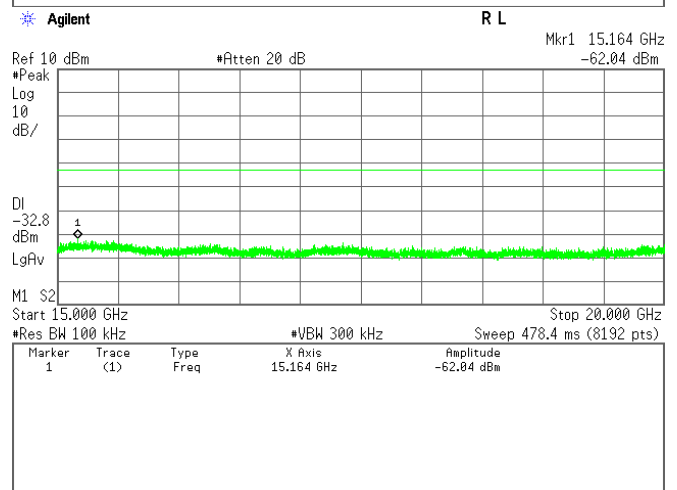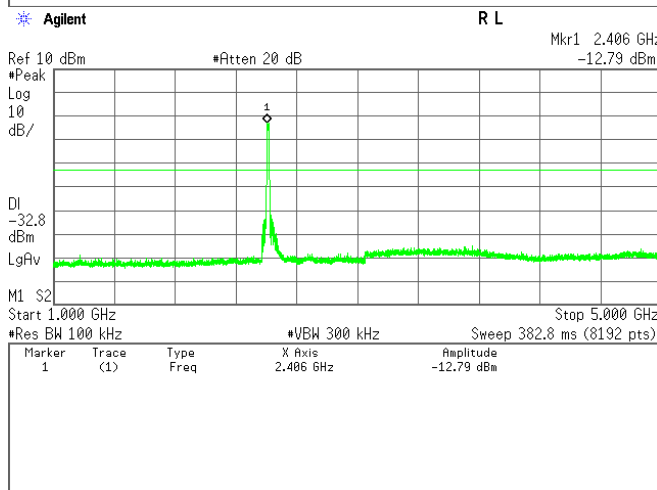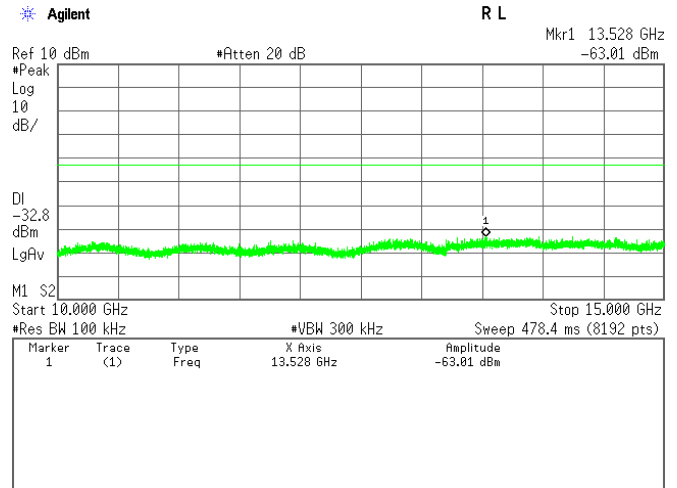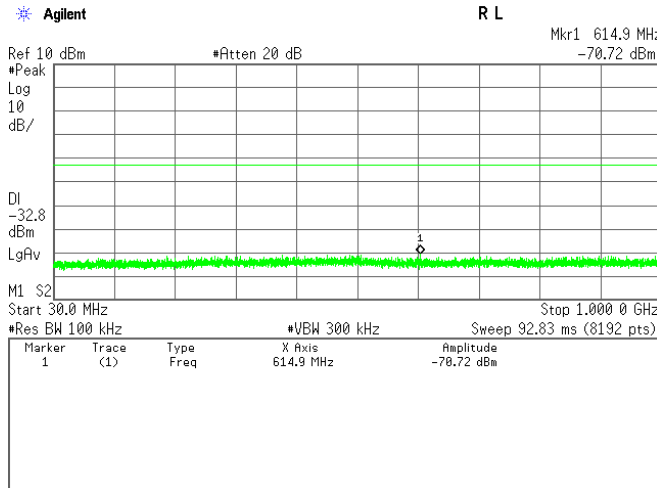

Middle channel

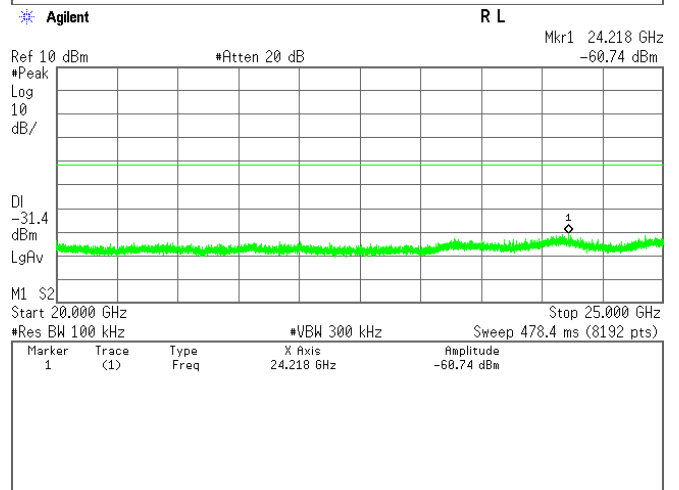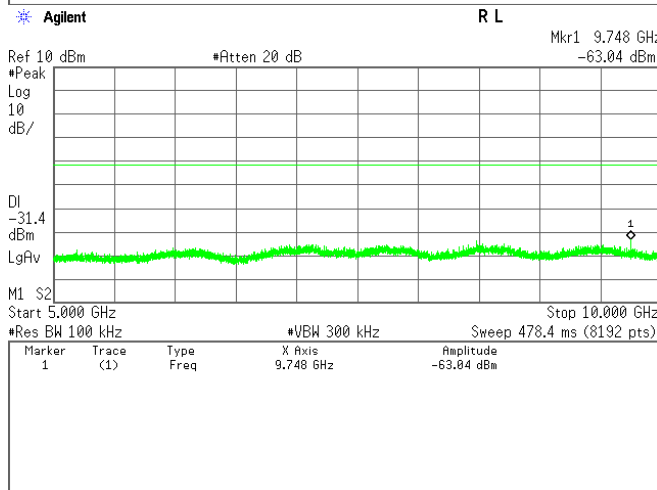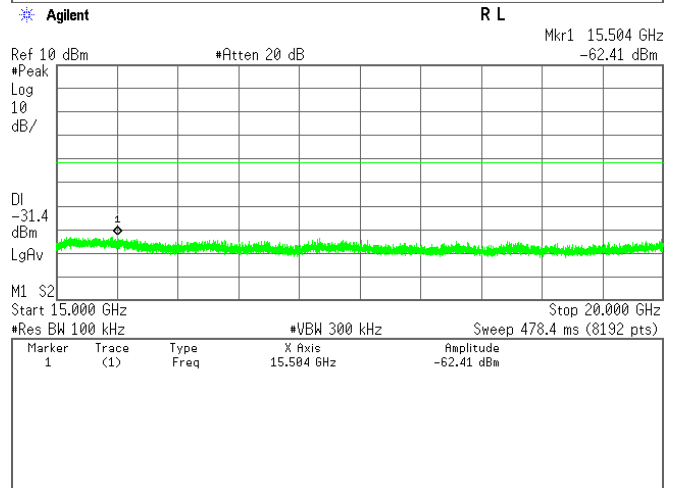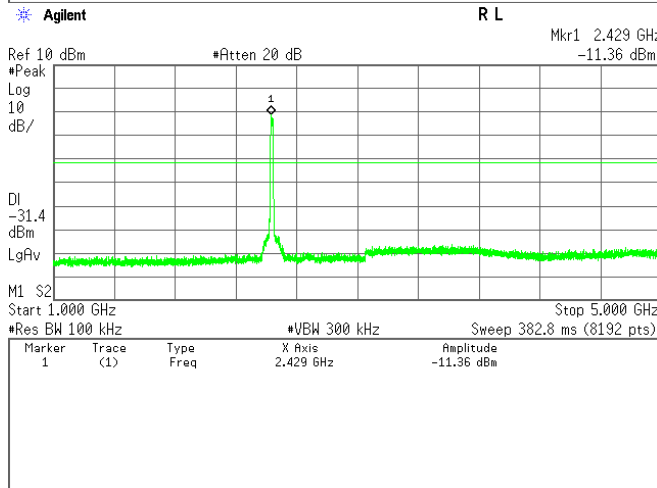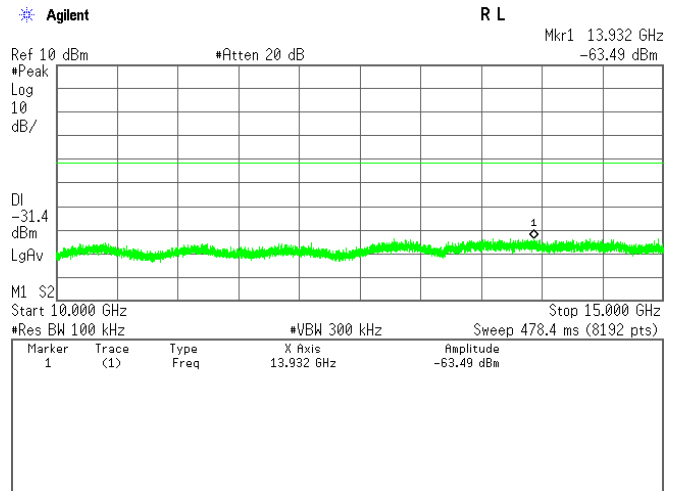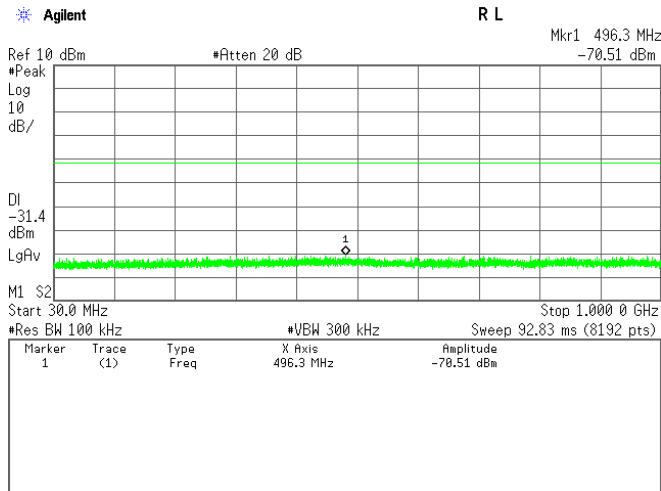


High Channel

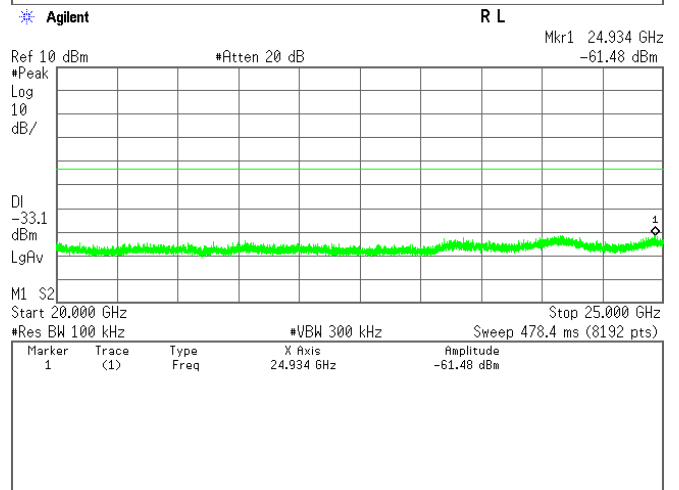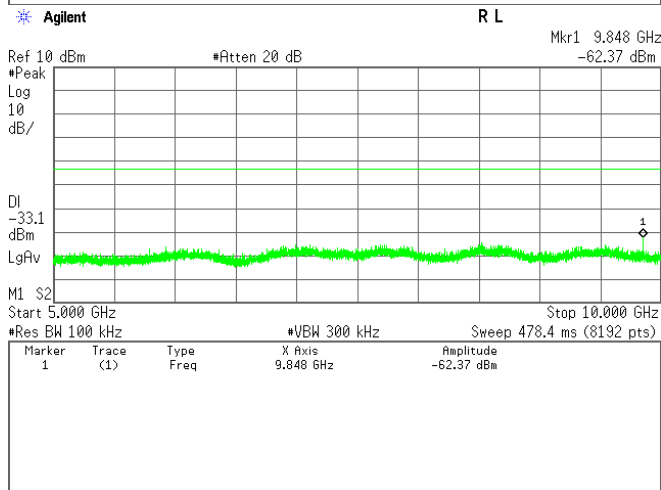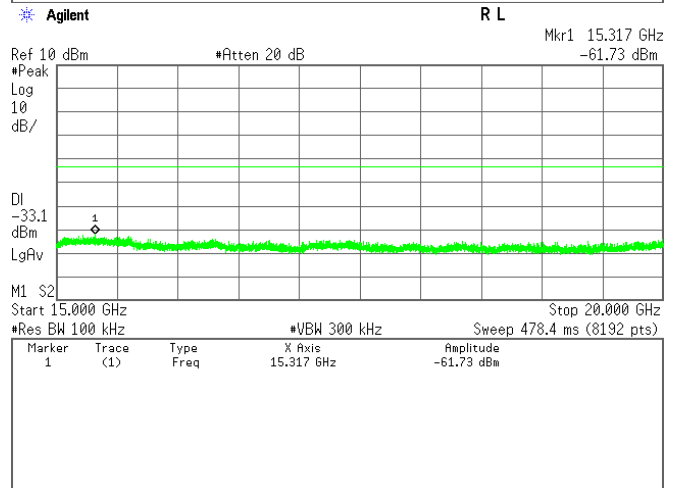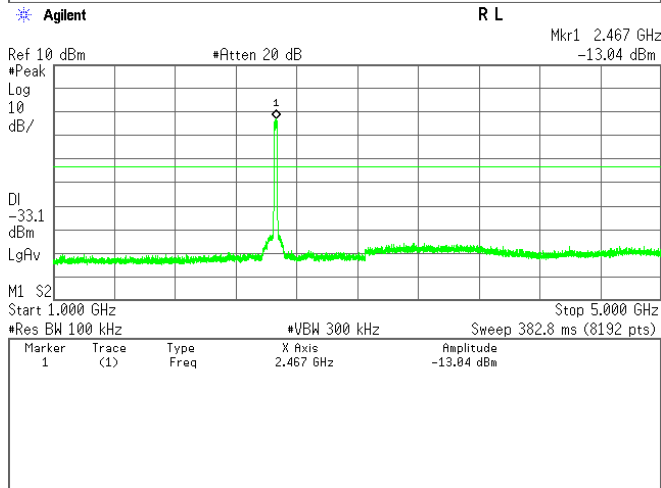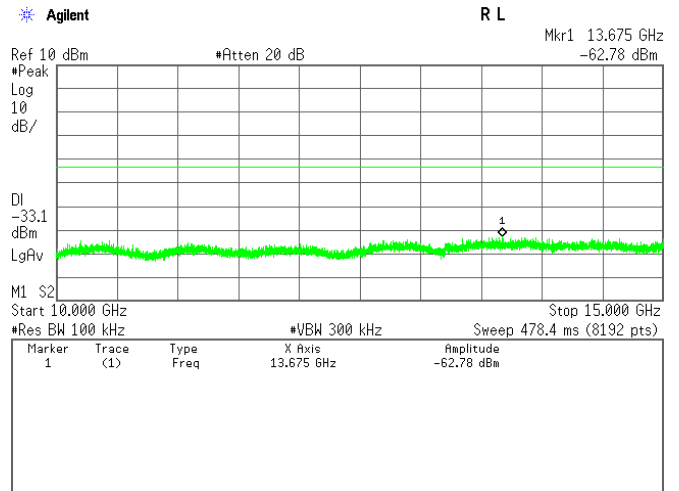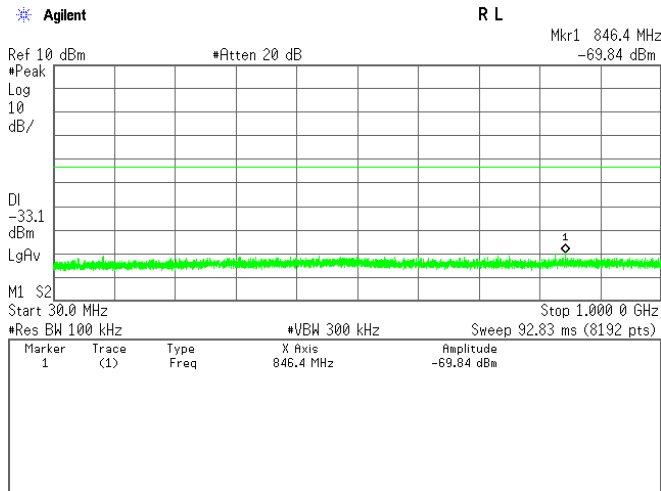


2-2) IEEE 802.11g (ANT1)


Low Channel

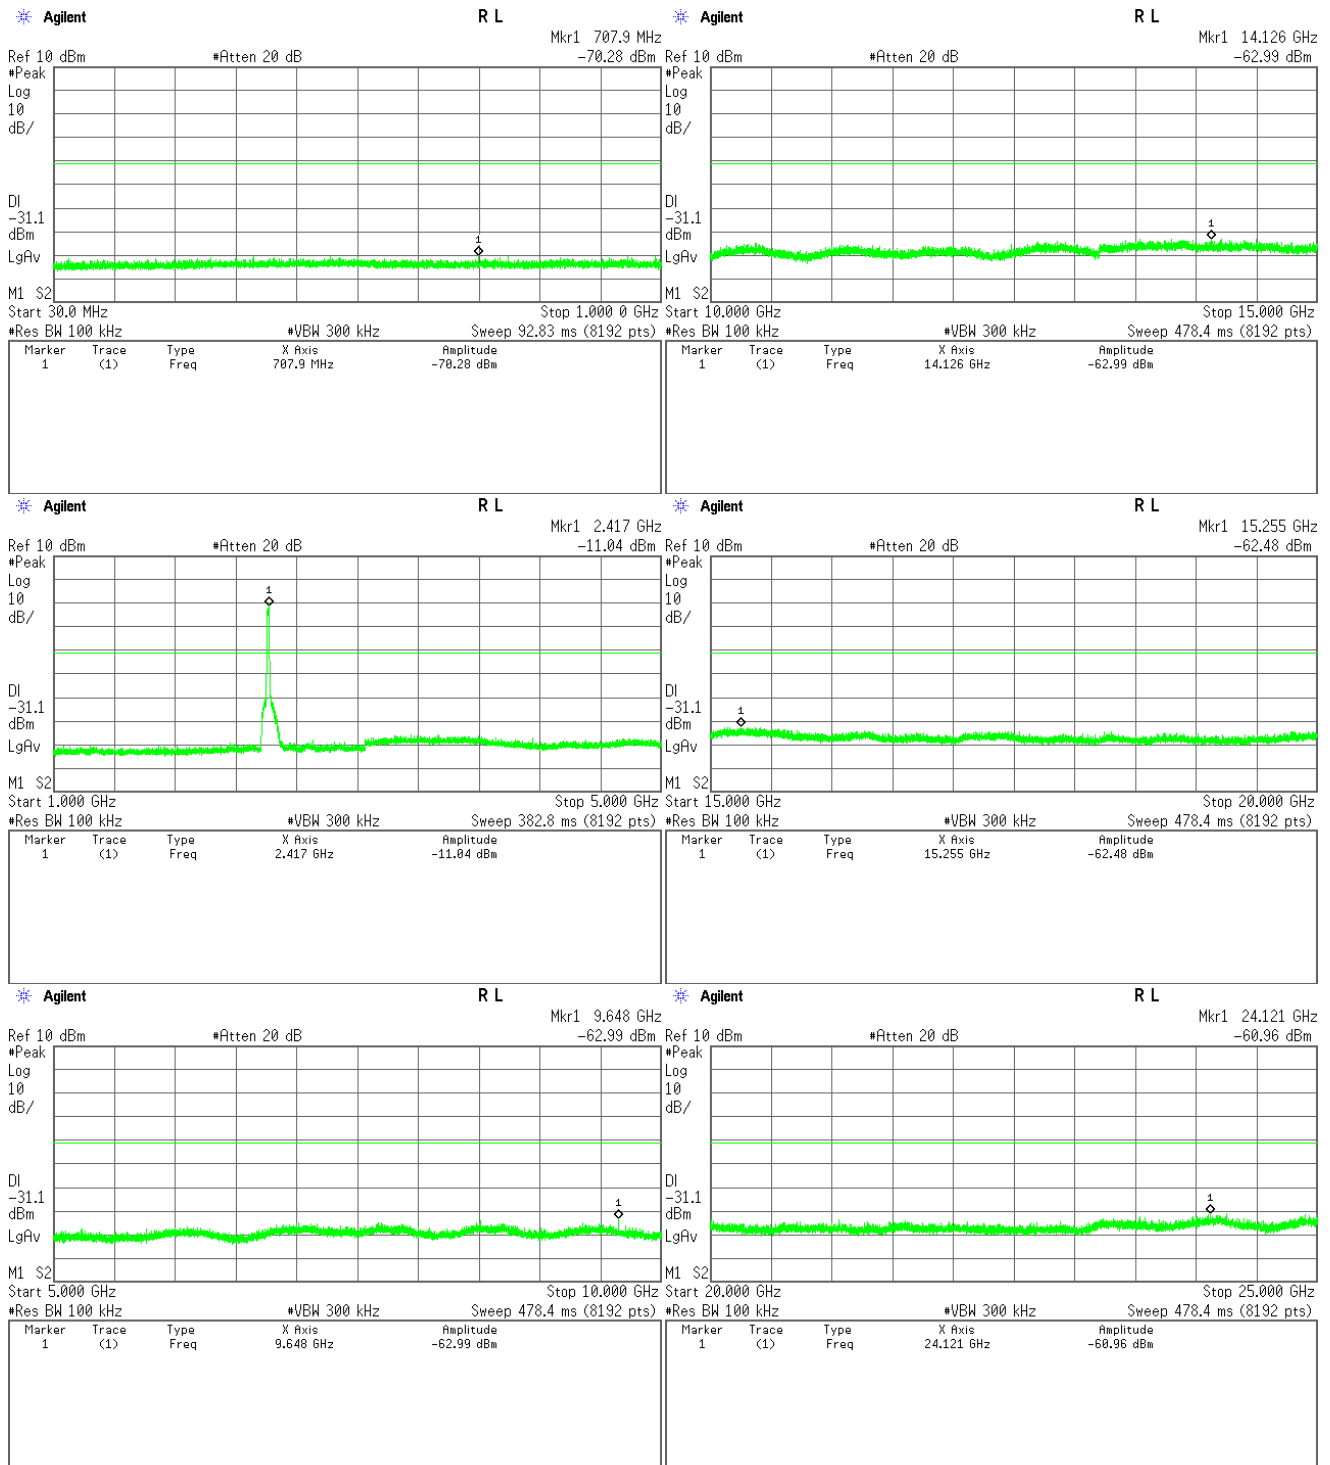

Middle channel

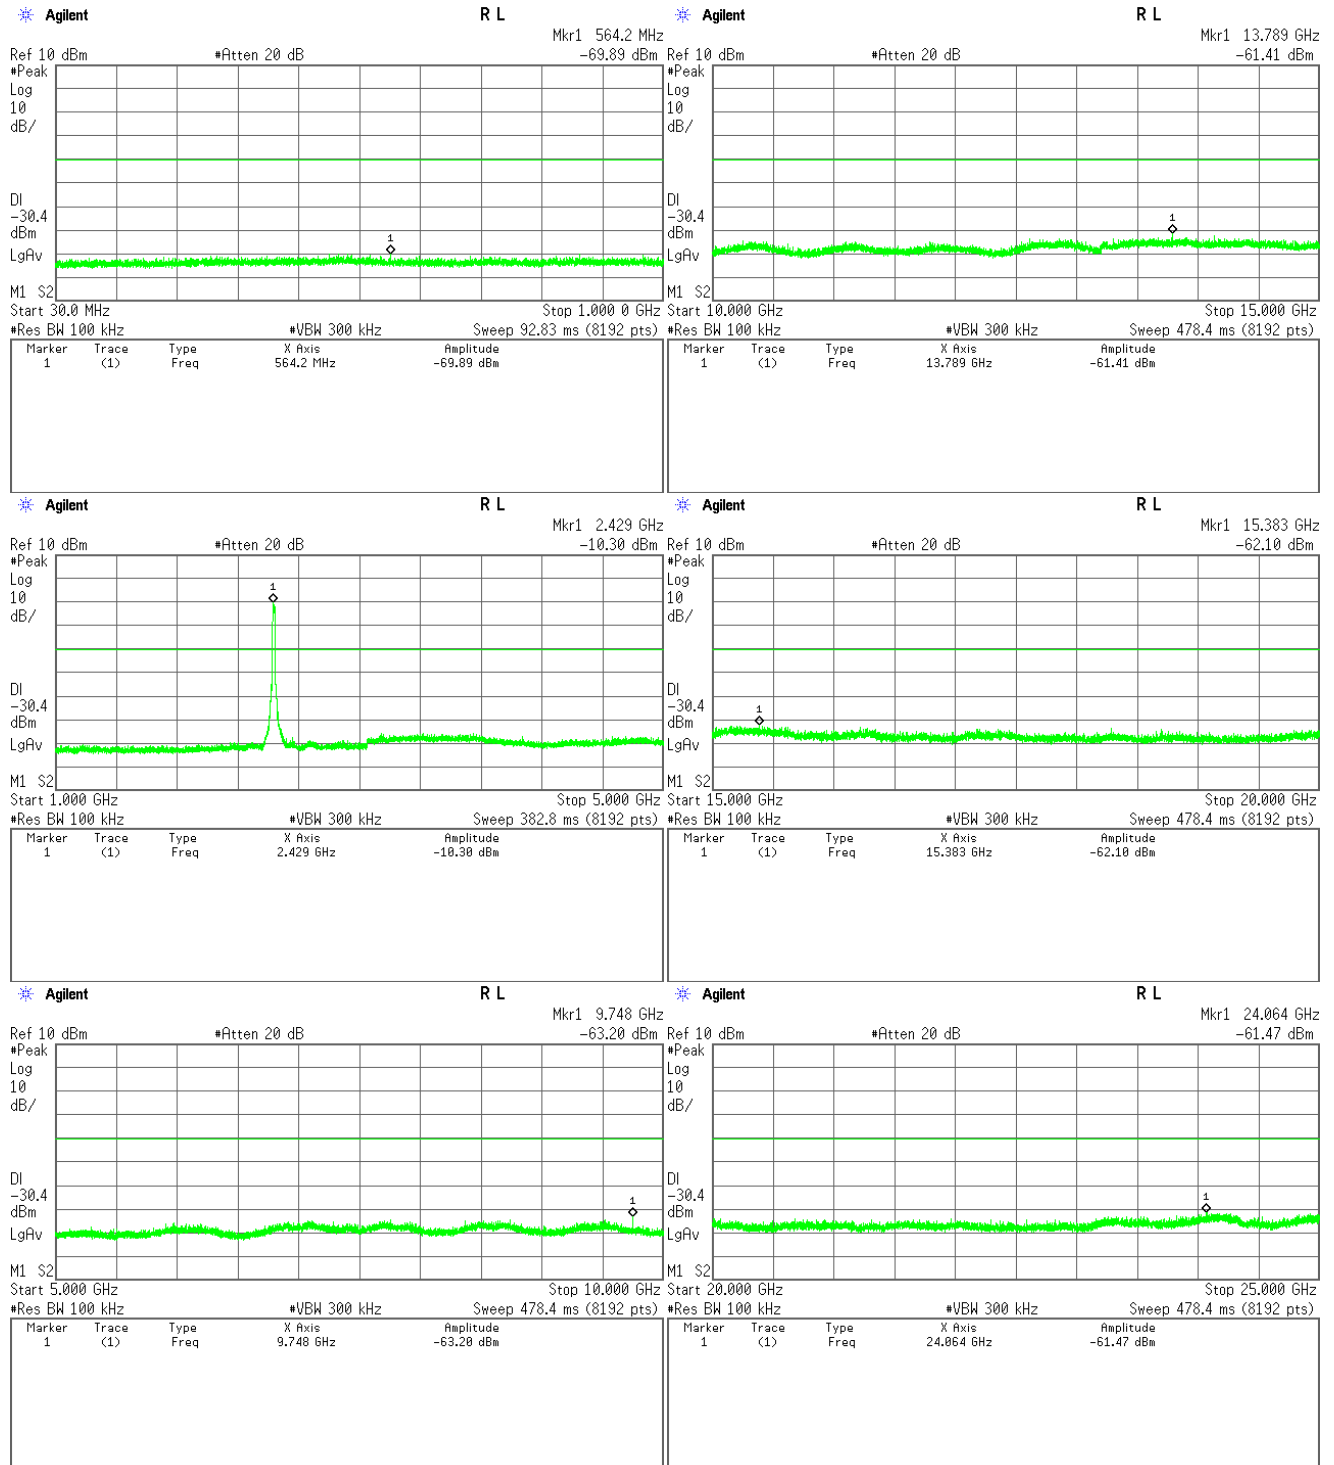


High Channel

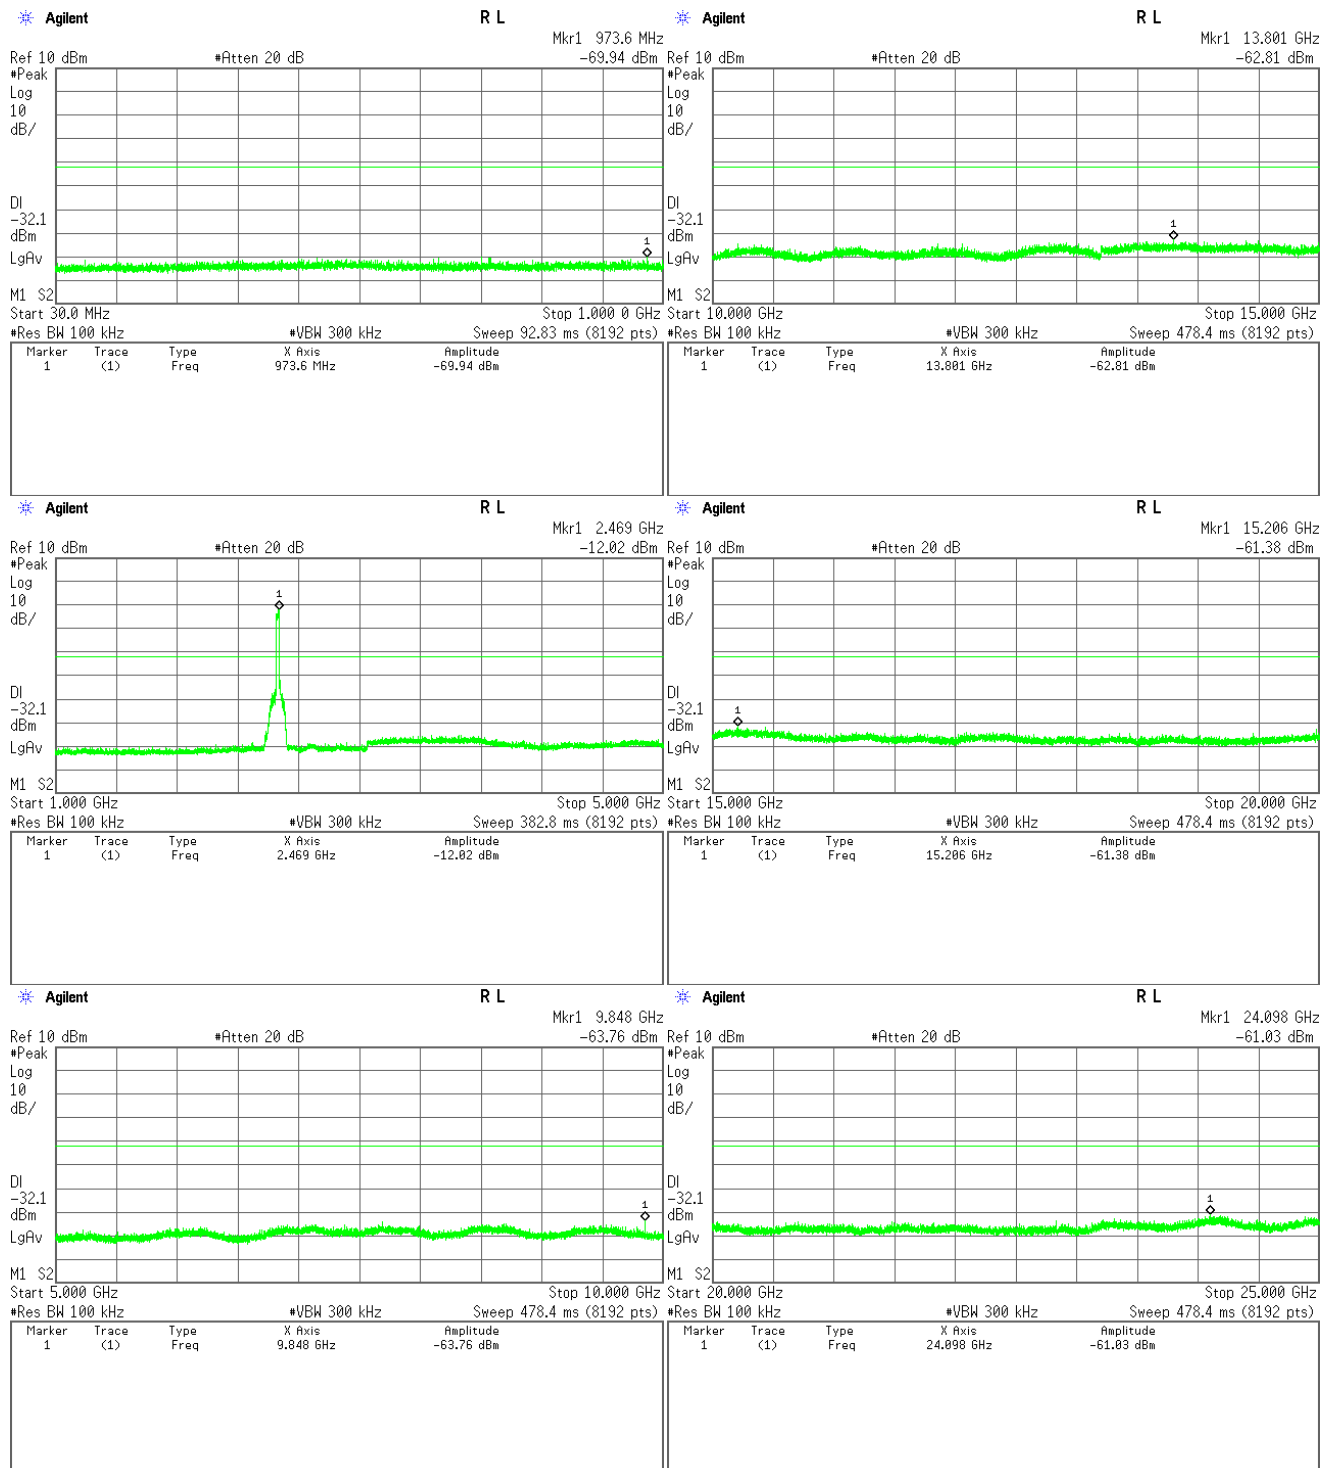


3-1) IEEE 802.11n (ANTO)


Low Channel

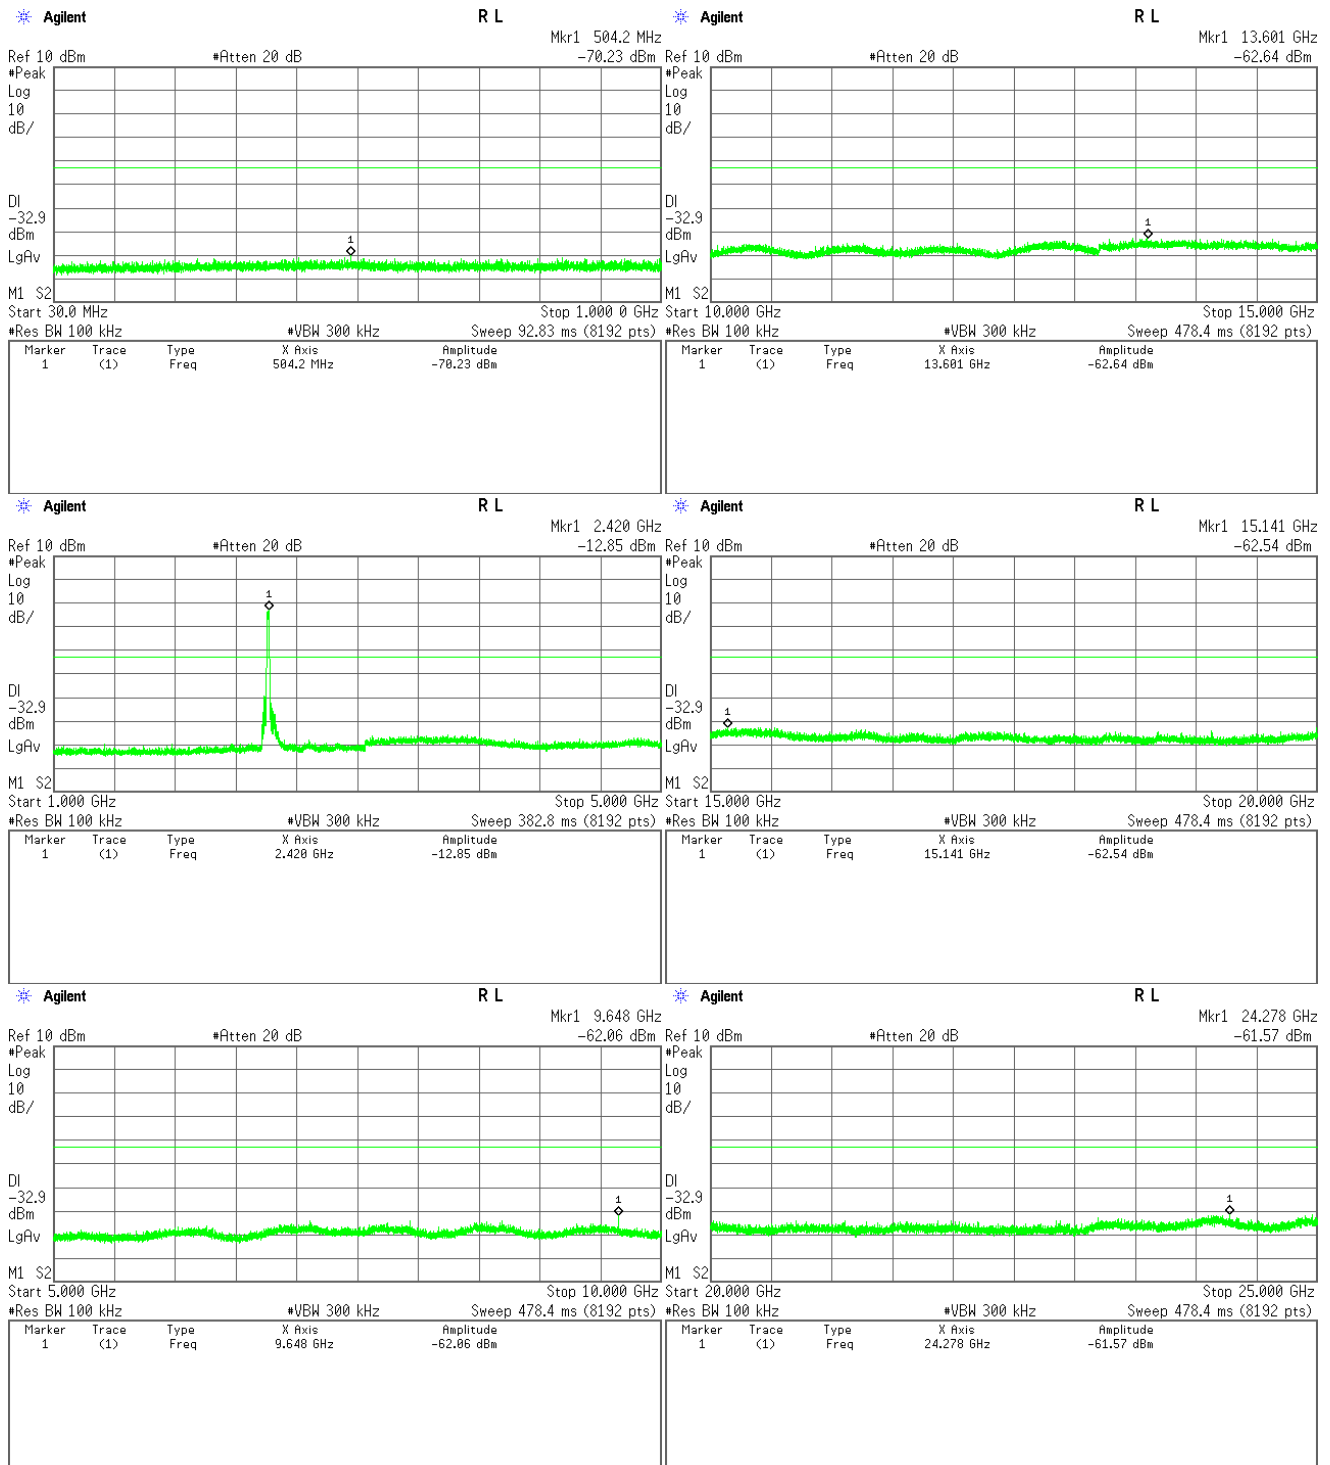

Middle Channel

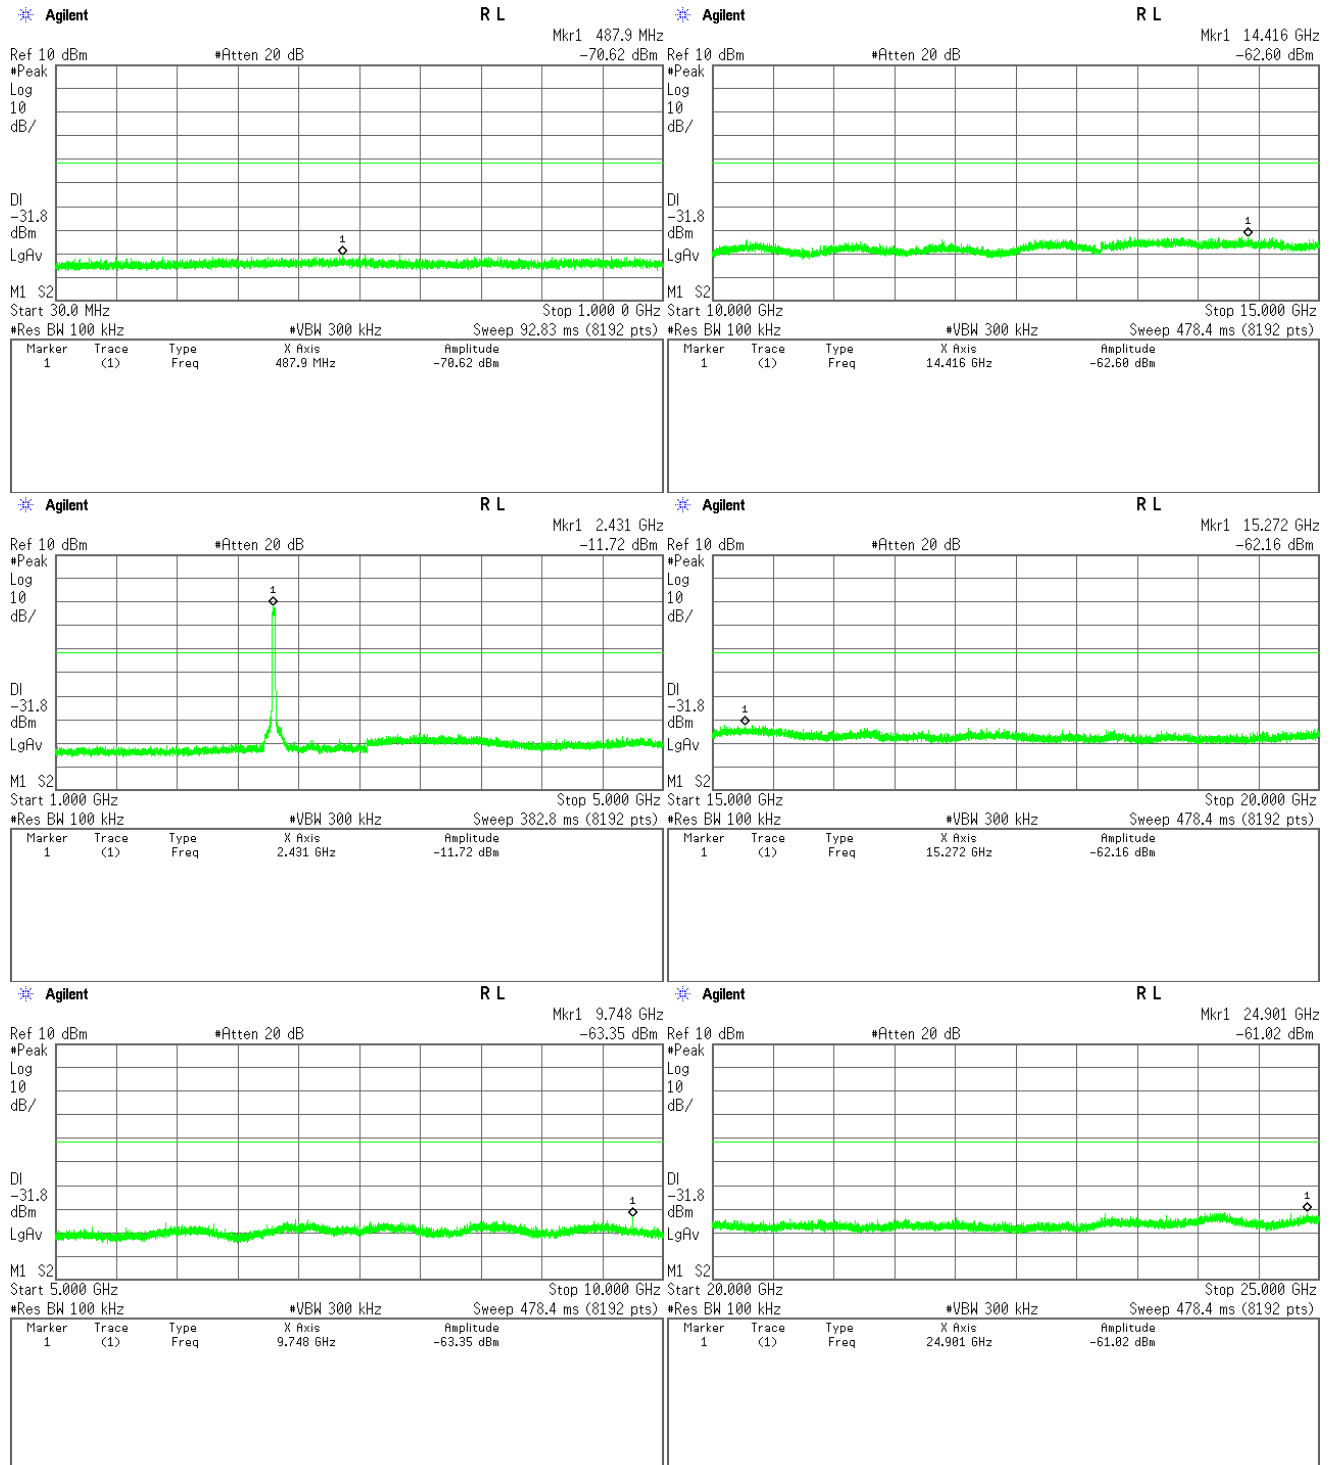


High Channel

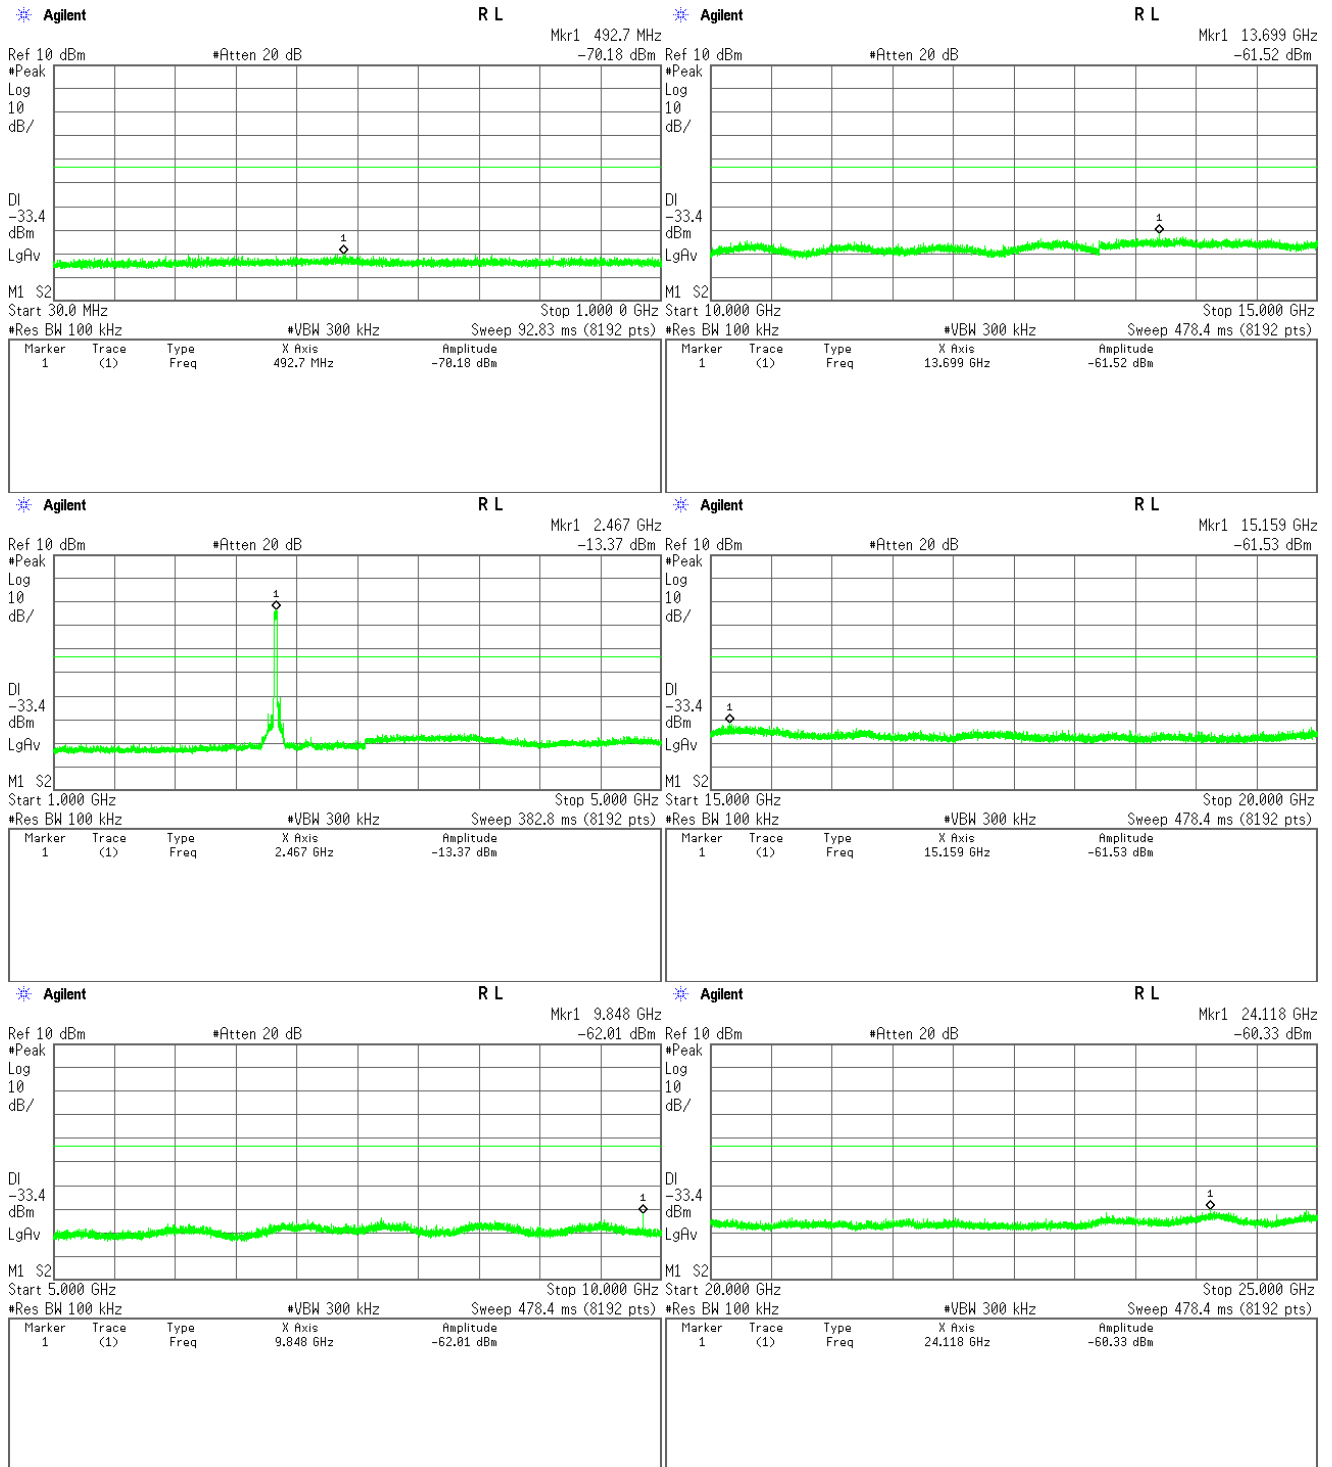


3-2) IEEE 802.11n (ANT1)


Low Channel

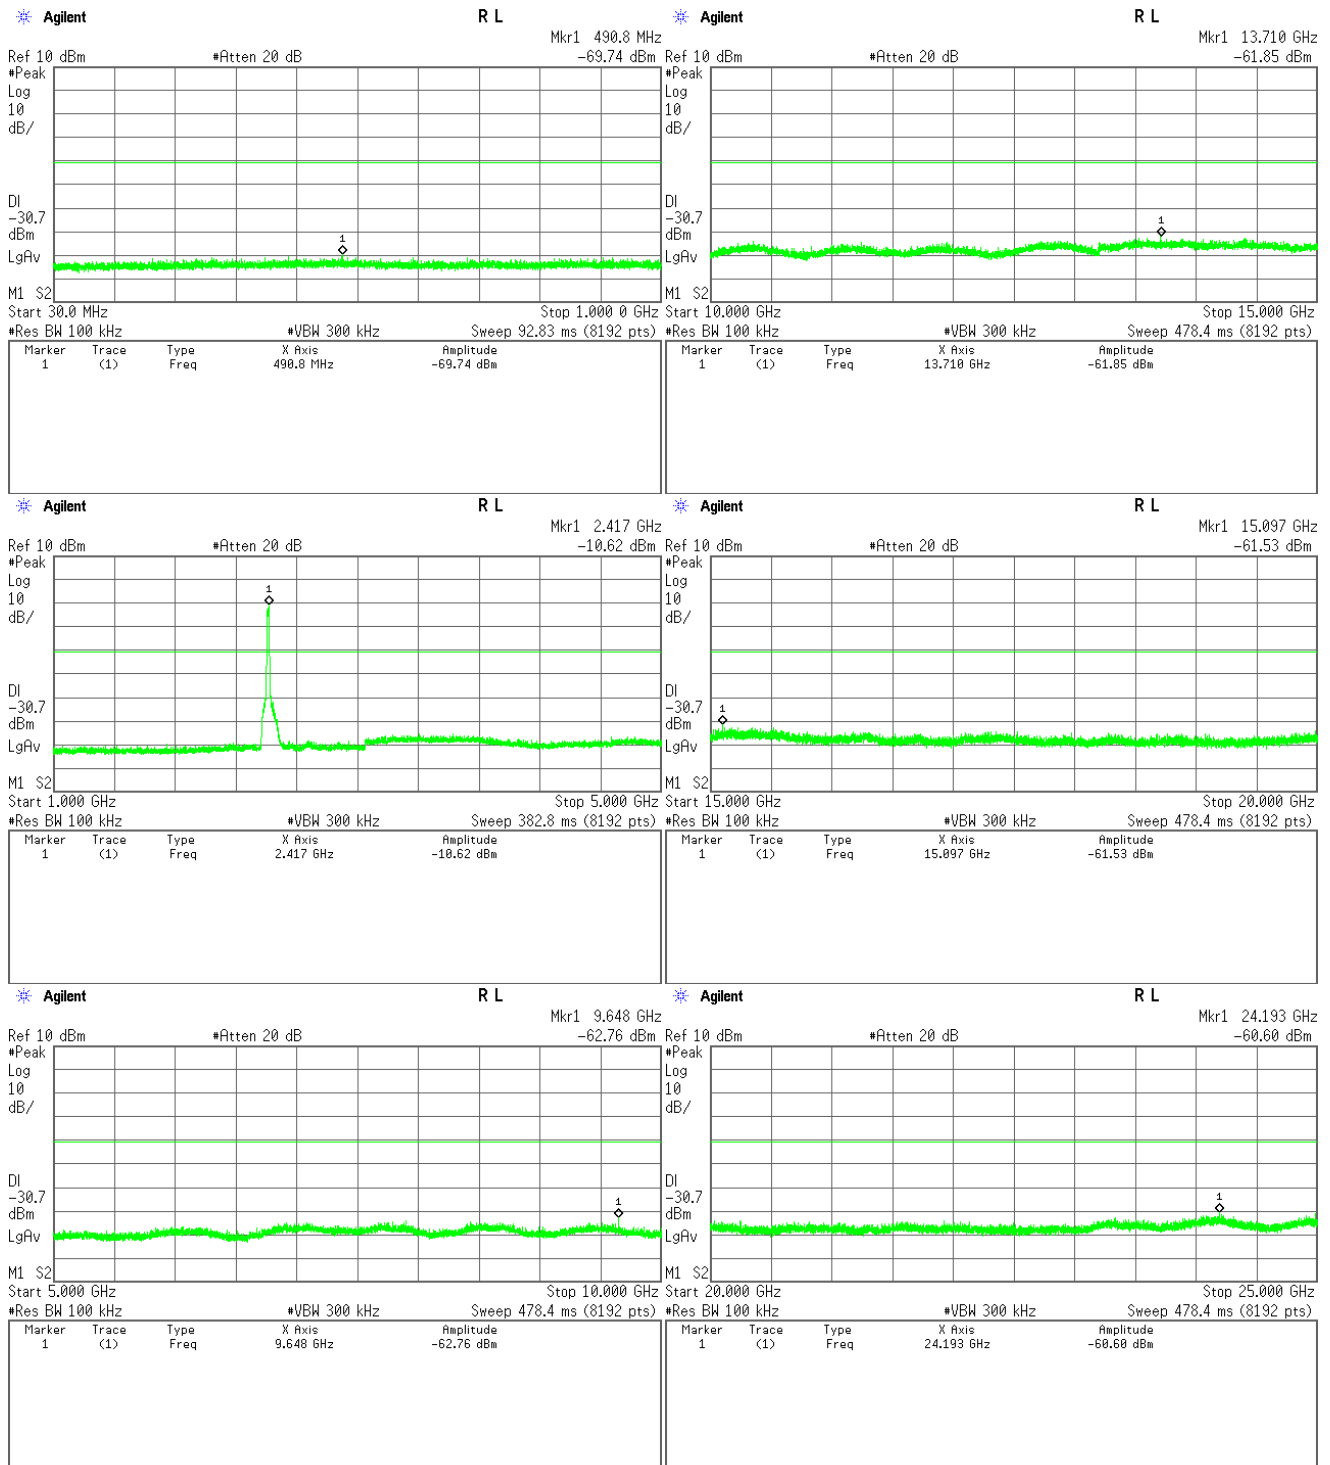

Middle Channel

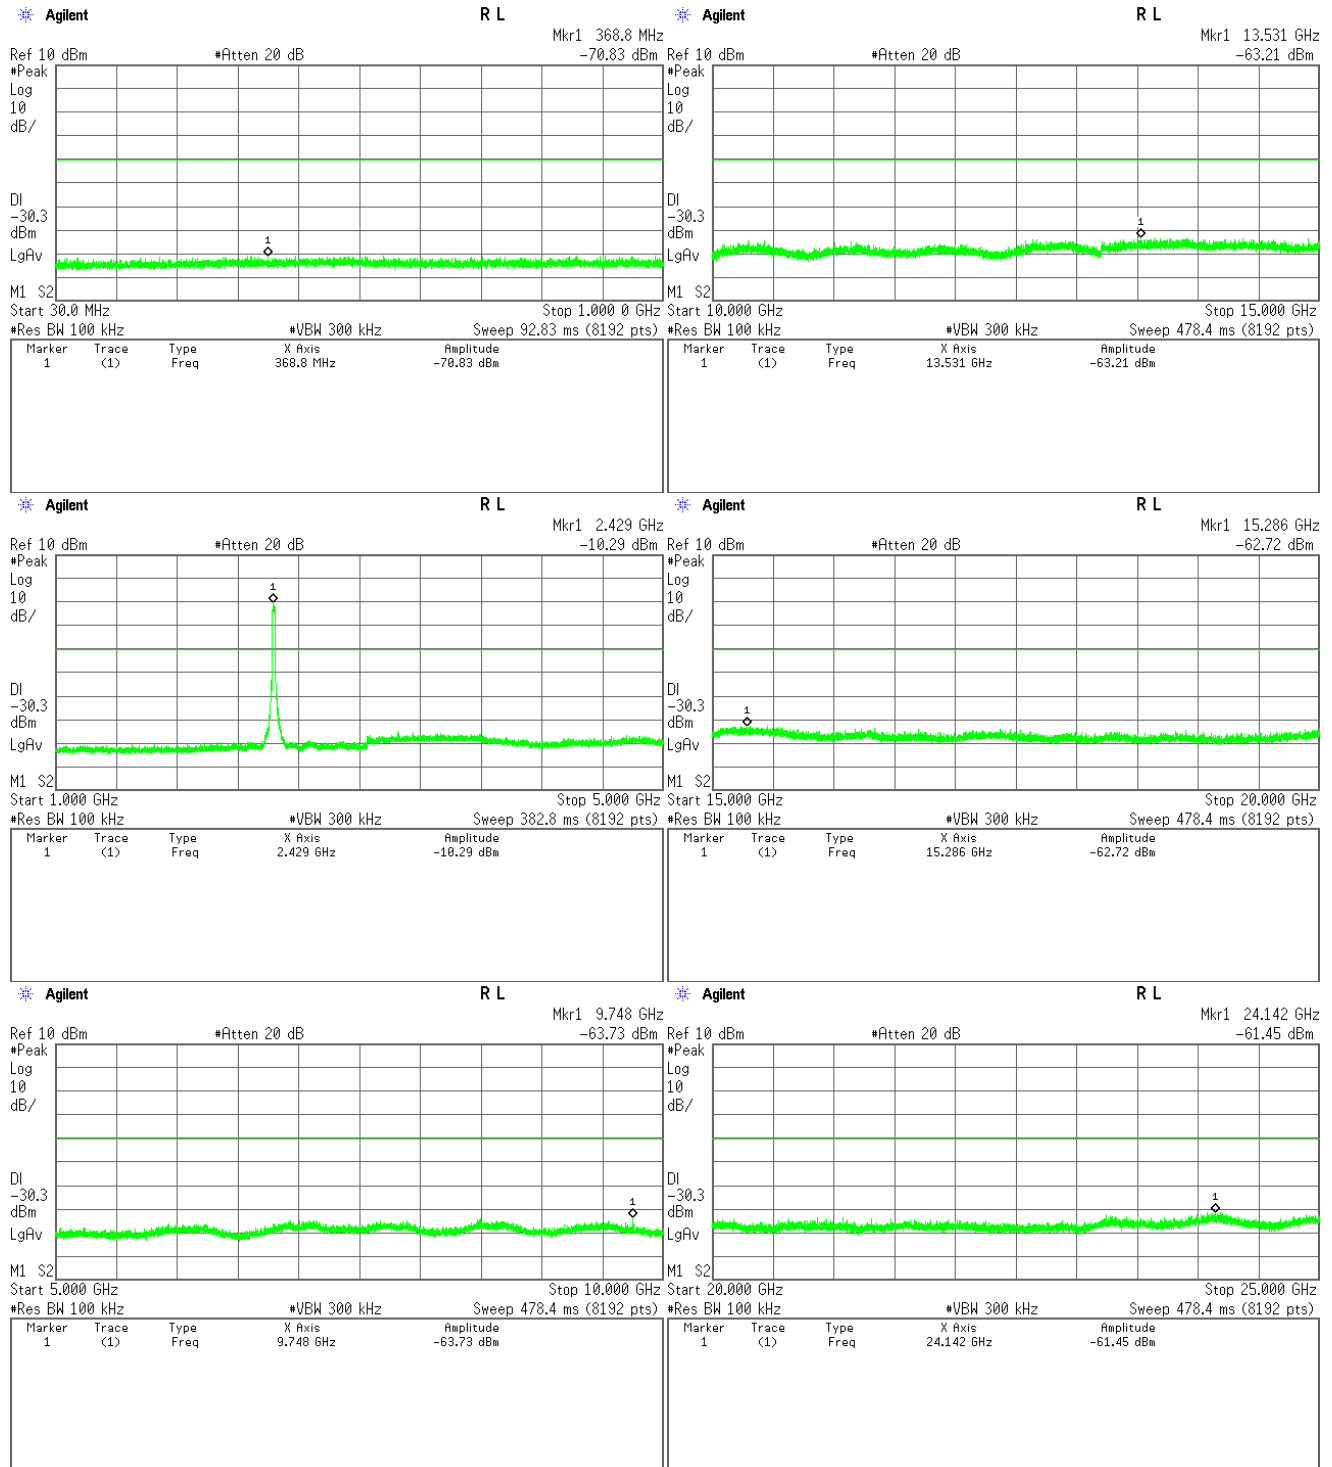


High Channel

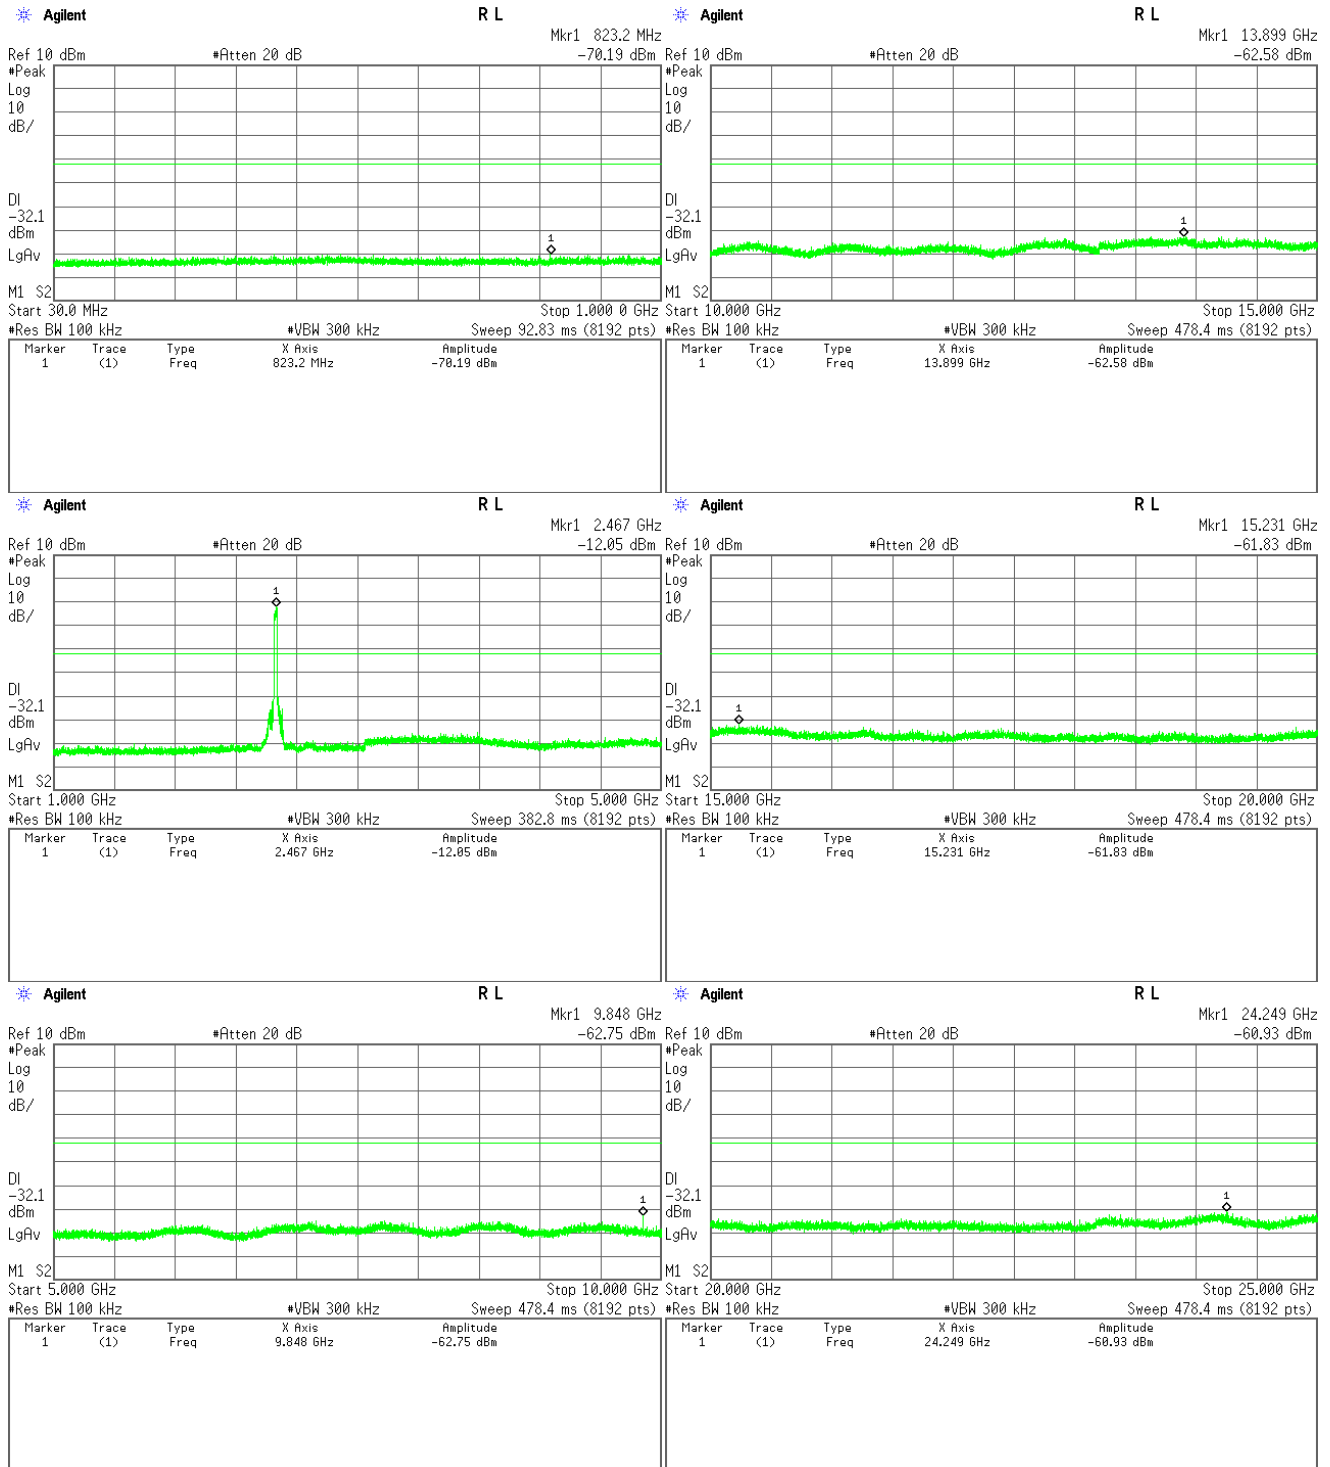


4) Bluetooth Low Energy


Low Channel

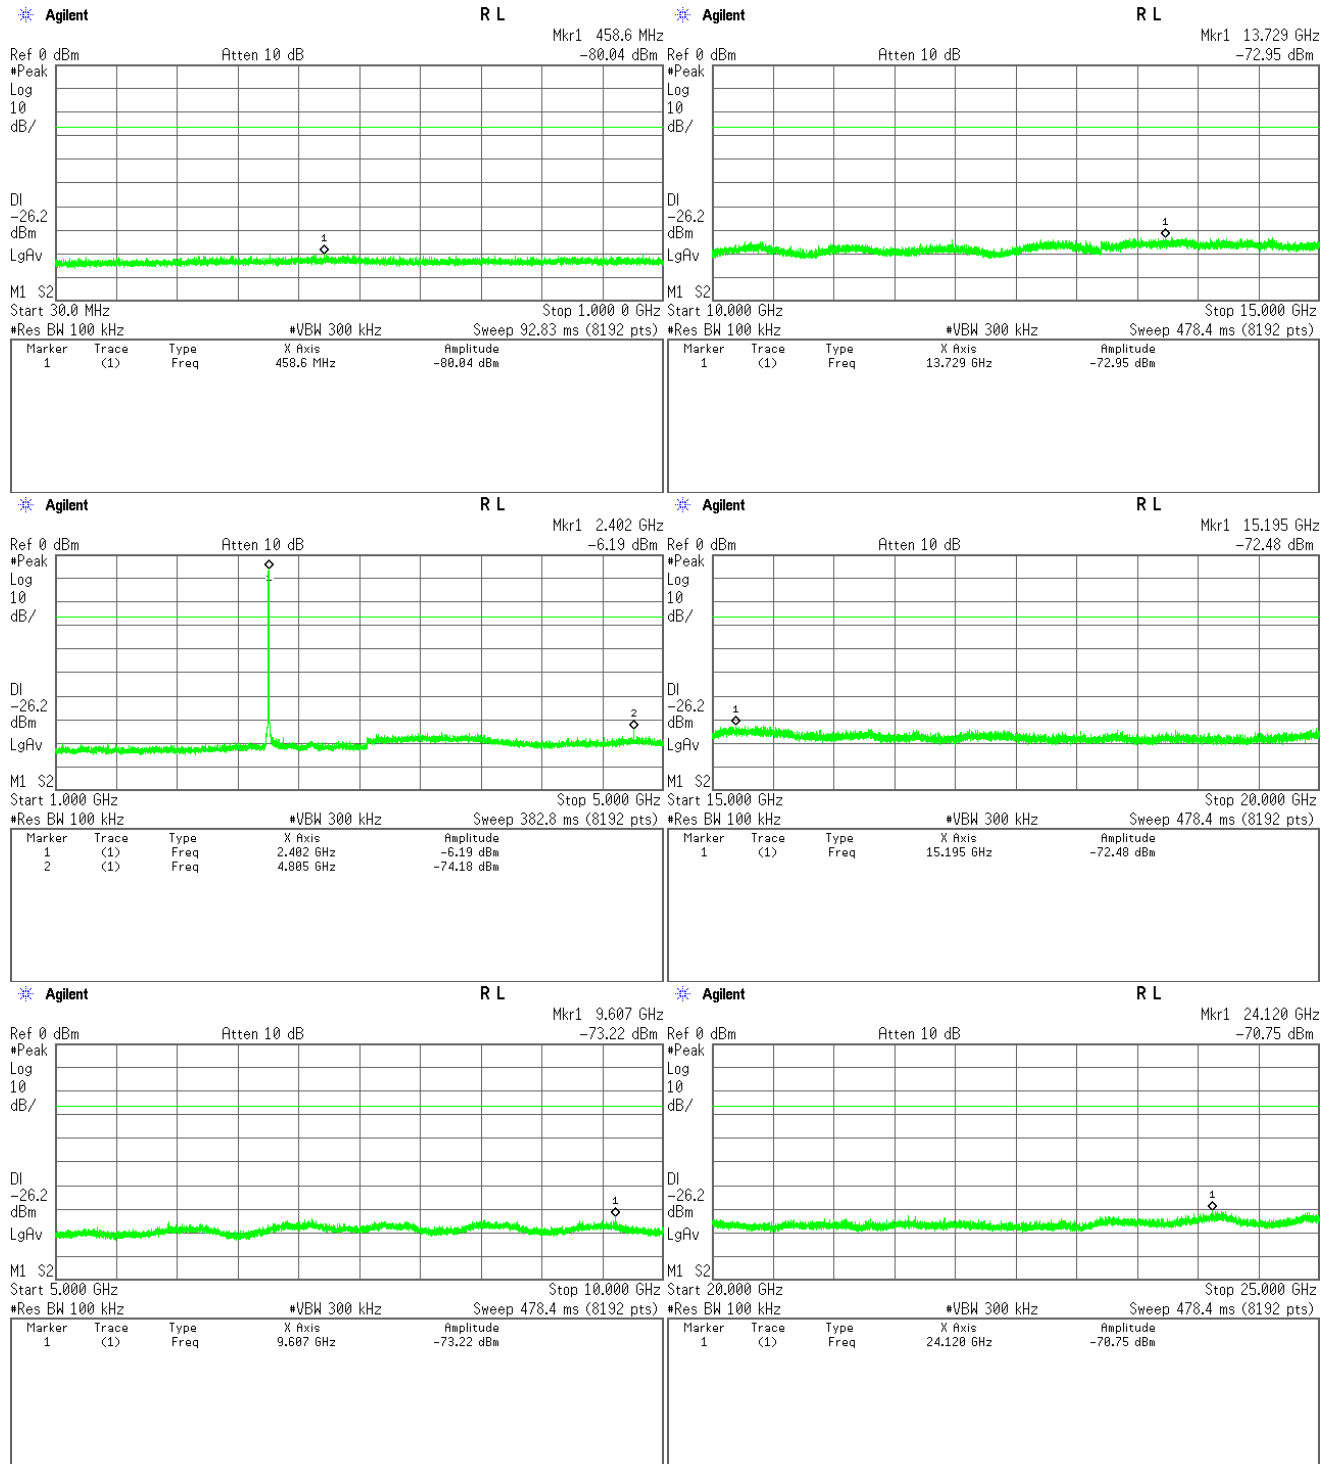

Middle Channel

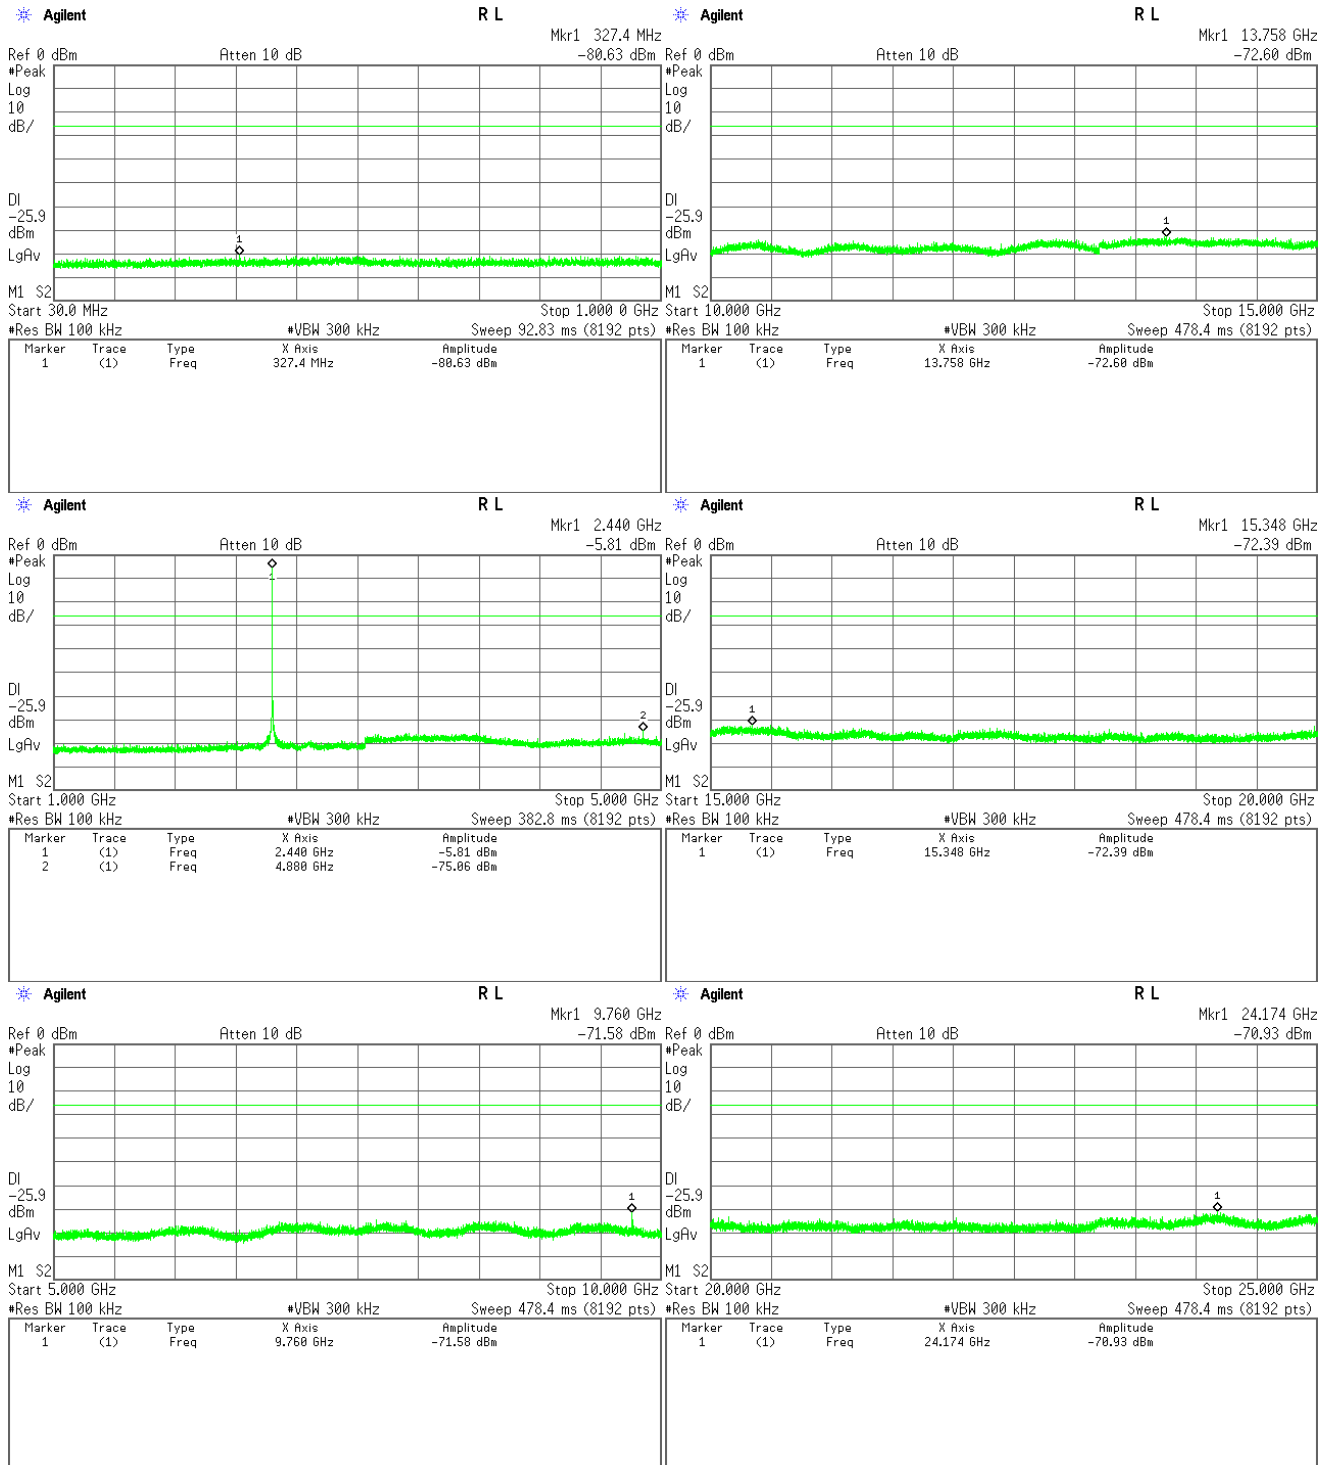


High Channel

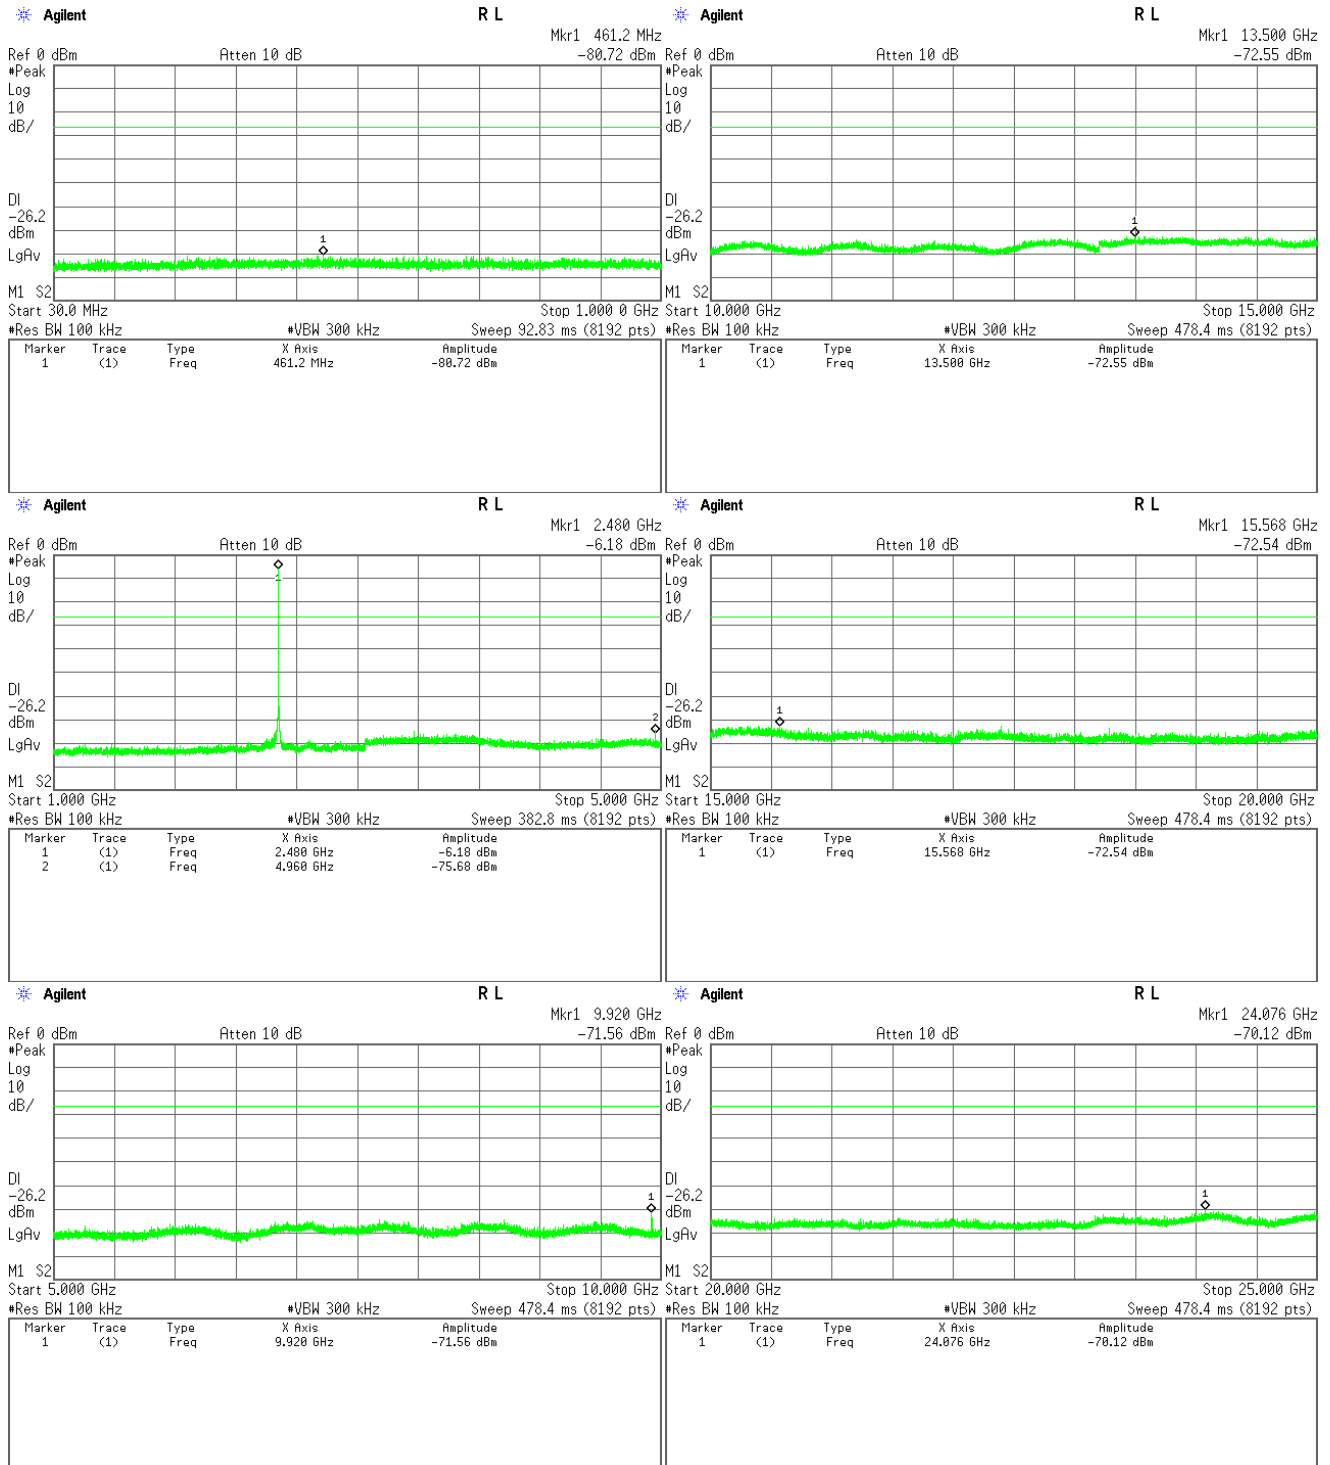


Band-Edge Emission

1-1) IEEE 802.11b (ANT0)

Low Channel

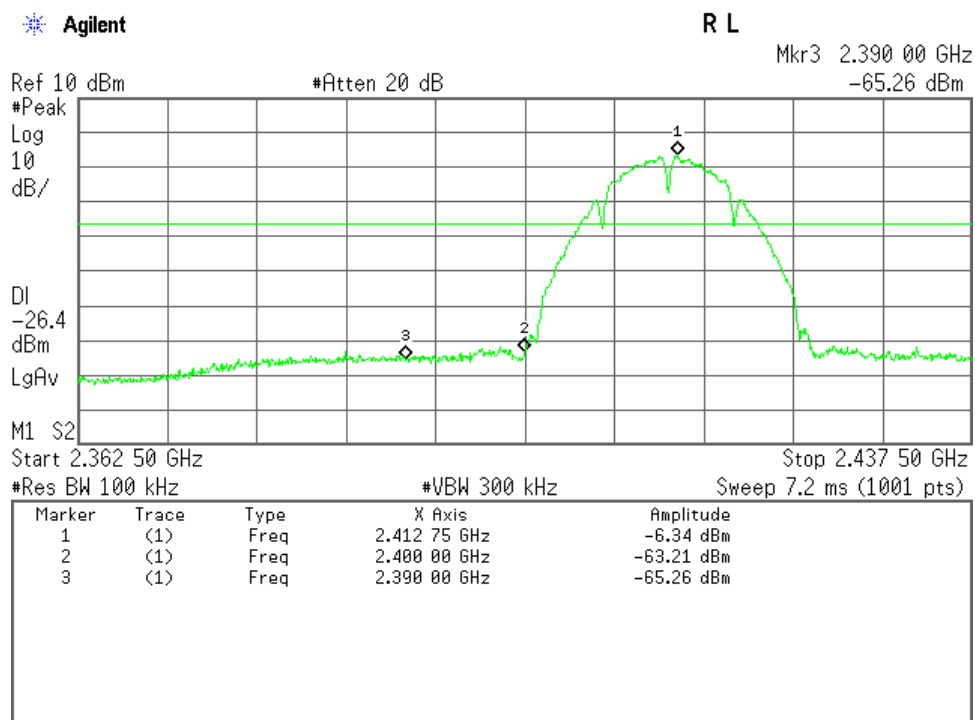


High Channel

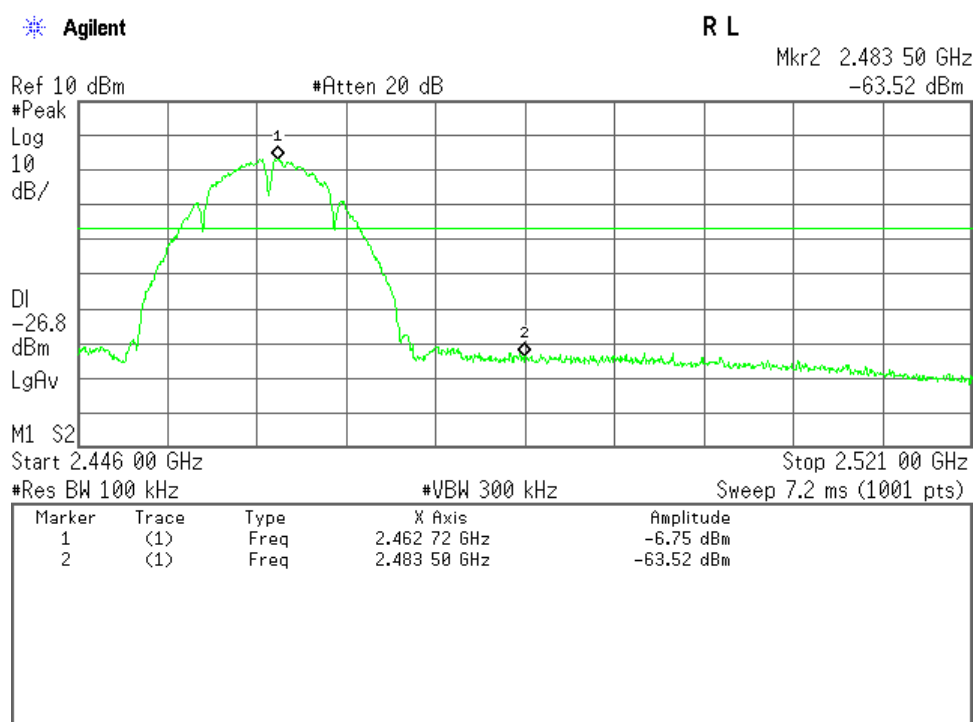


1-2) IEEE 802.11b (ANT1)

Low Channel

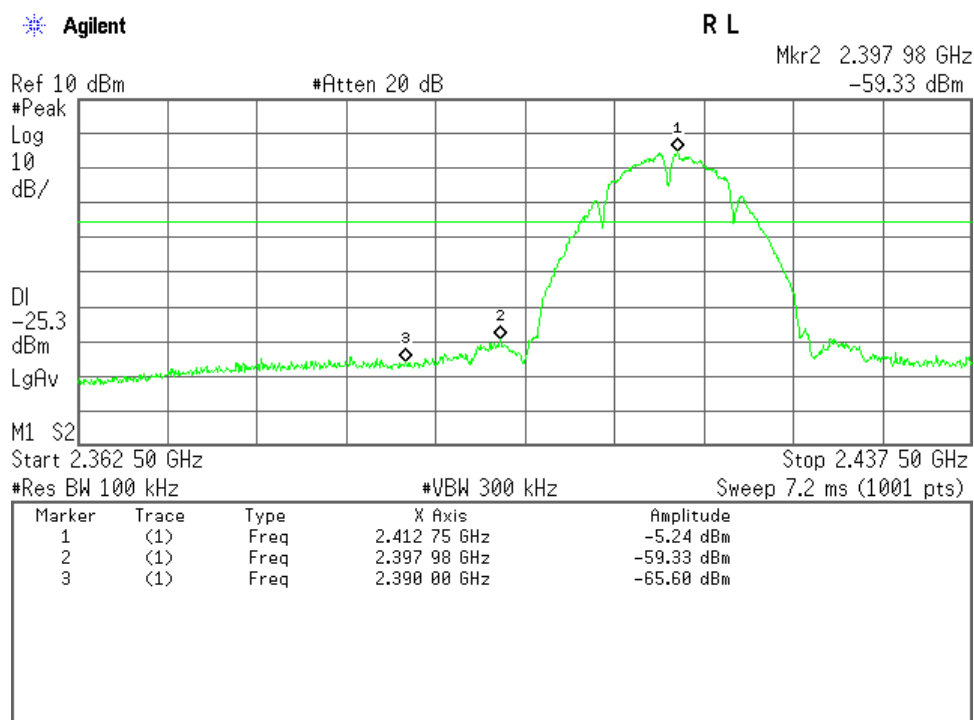


High Channel

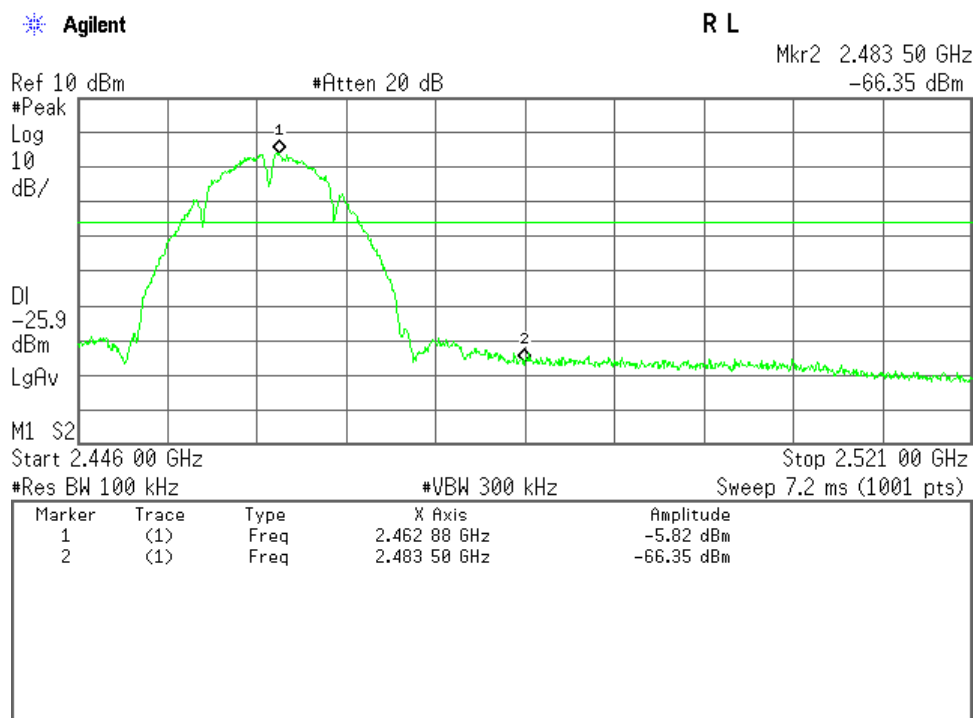


2-1) IEEE 802.11g (ANT0)

Low Channel

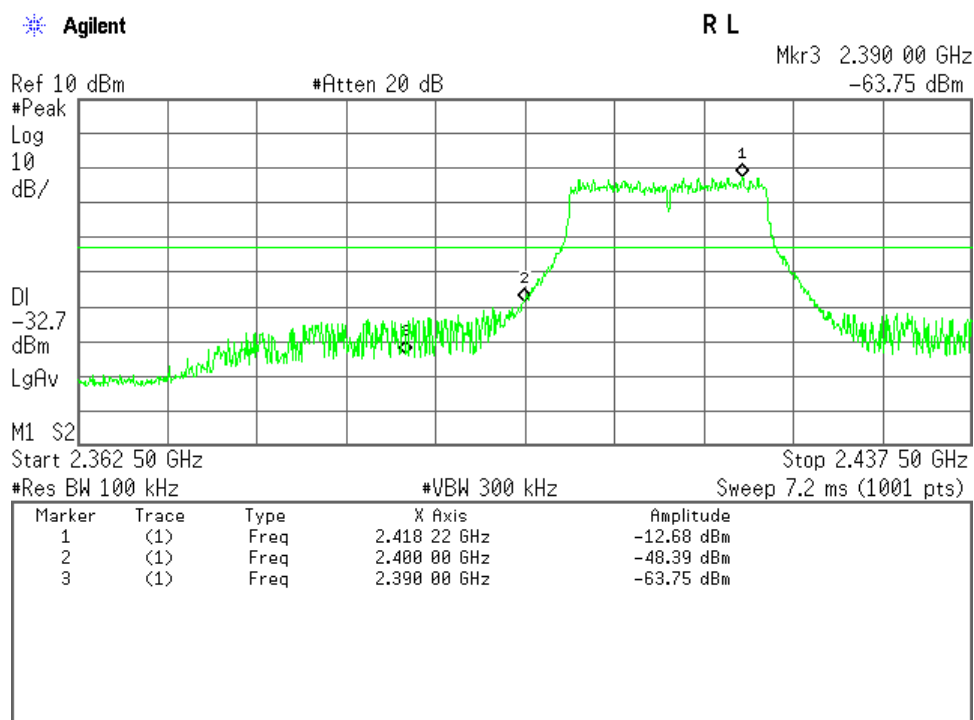


High Channel

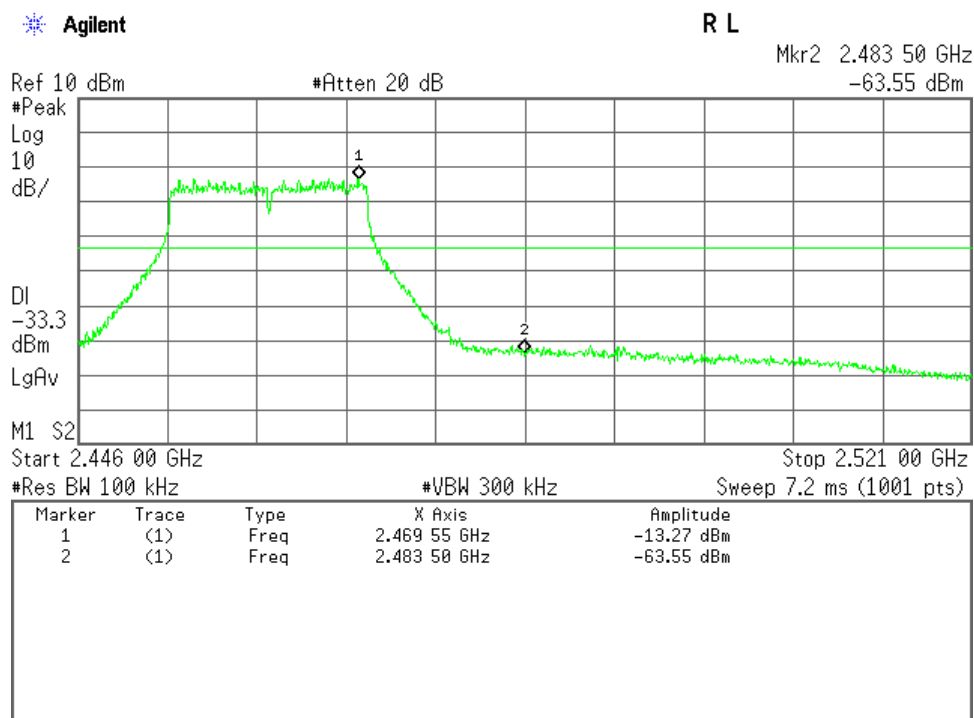


2-2) IEEE 802.11g (ANT1)

Low Channel

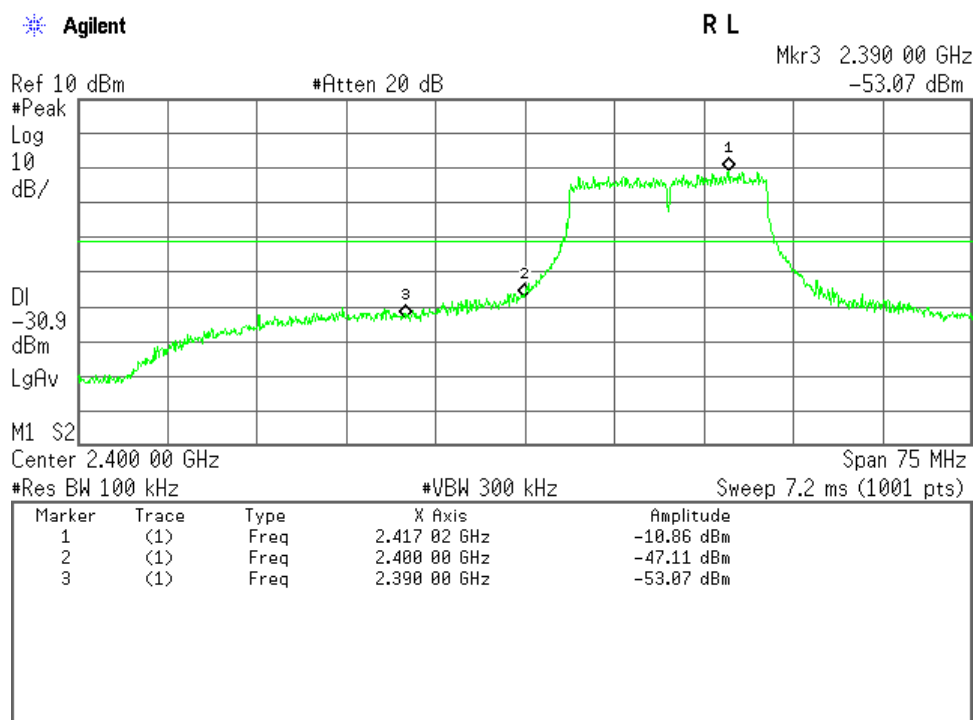


High Channel

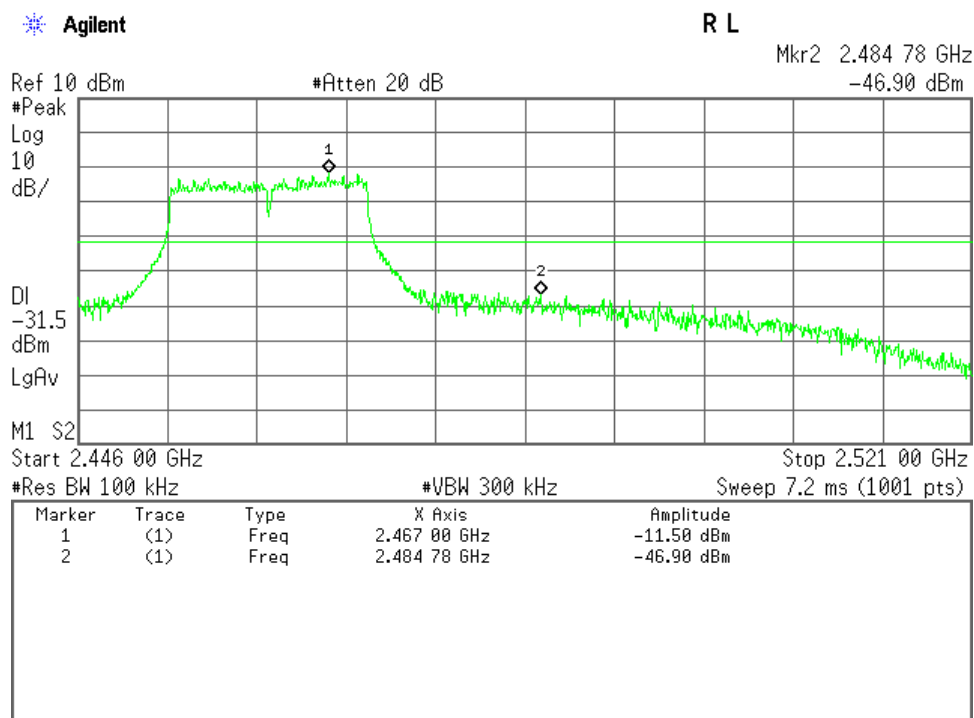


3-1) IEEE 802.11n (ANT0)

Low Channel

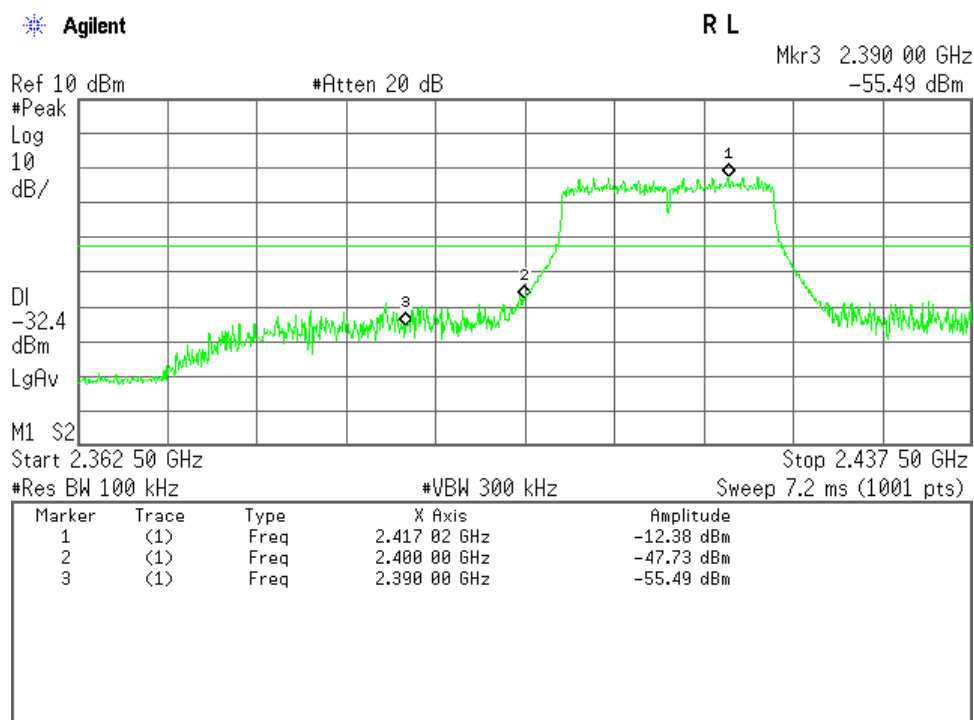


High Channel

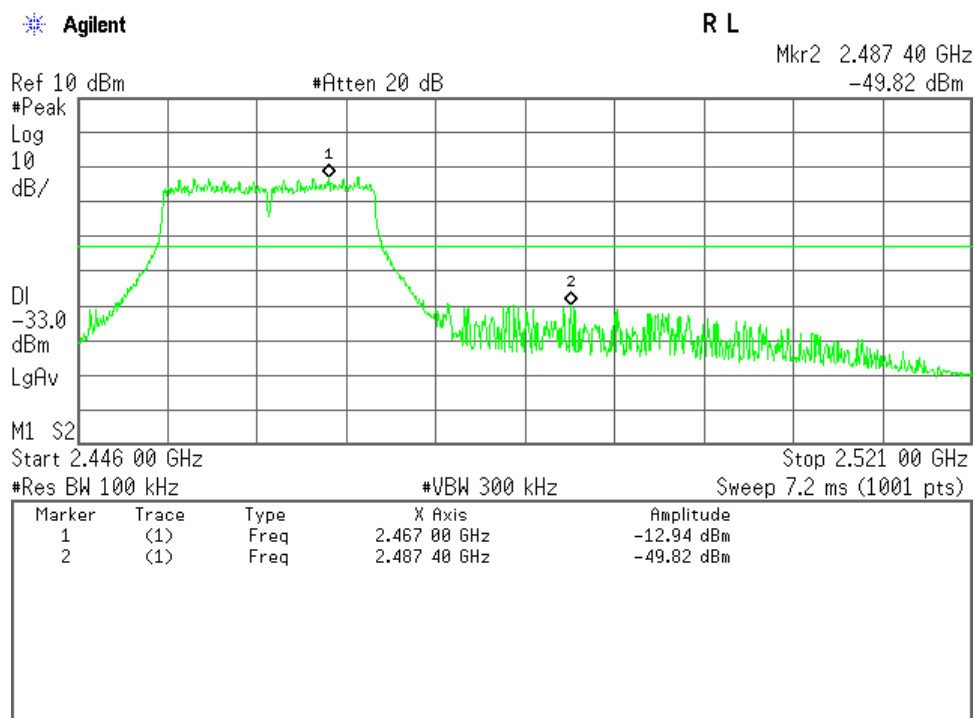


3-2) IEEE 802.11n (ANT1)

Low Channel

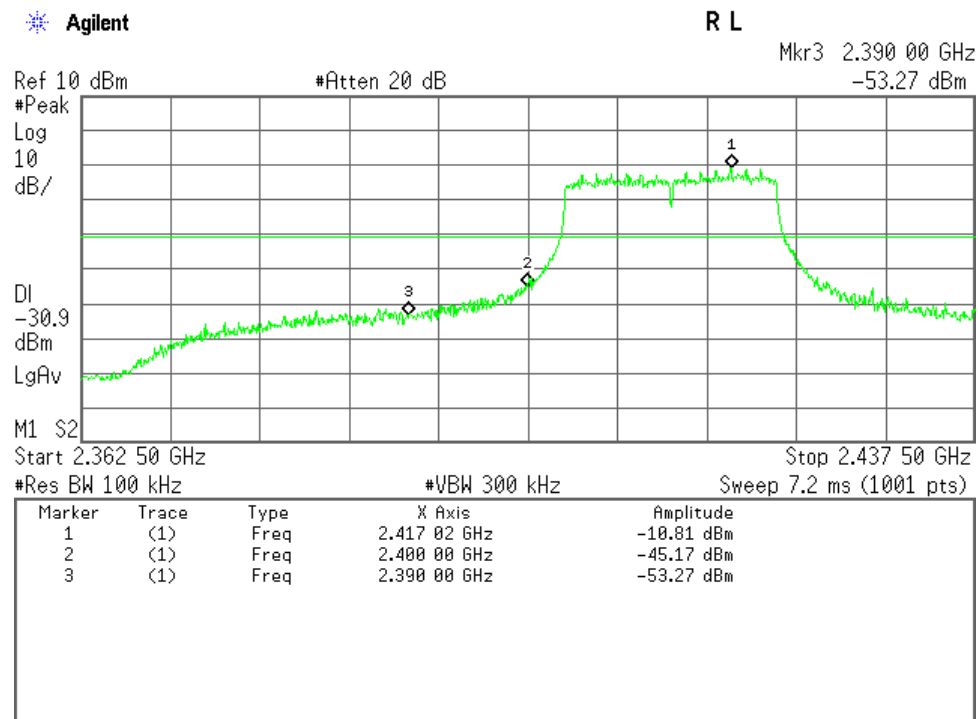


High Channel

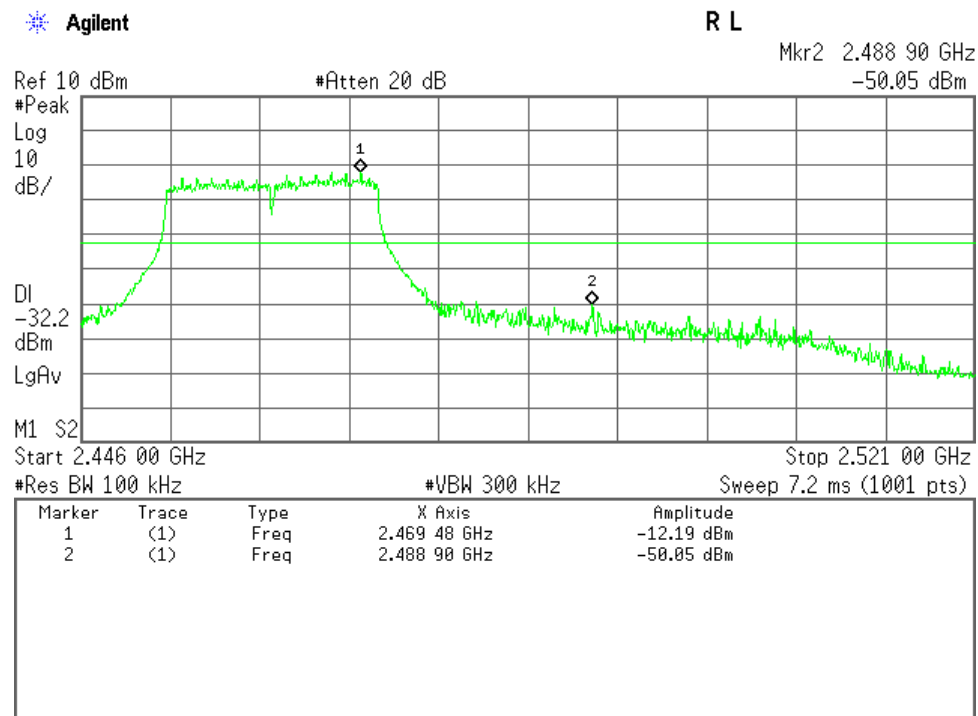


4) Bluetooth Low Energy

Low Channel

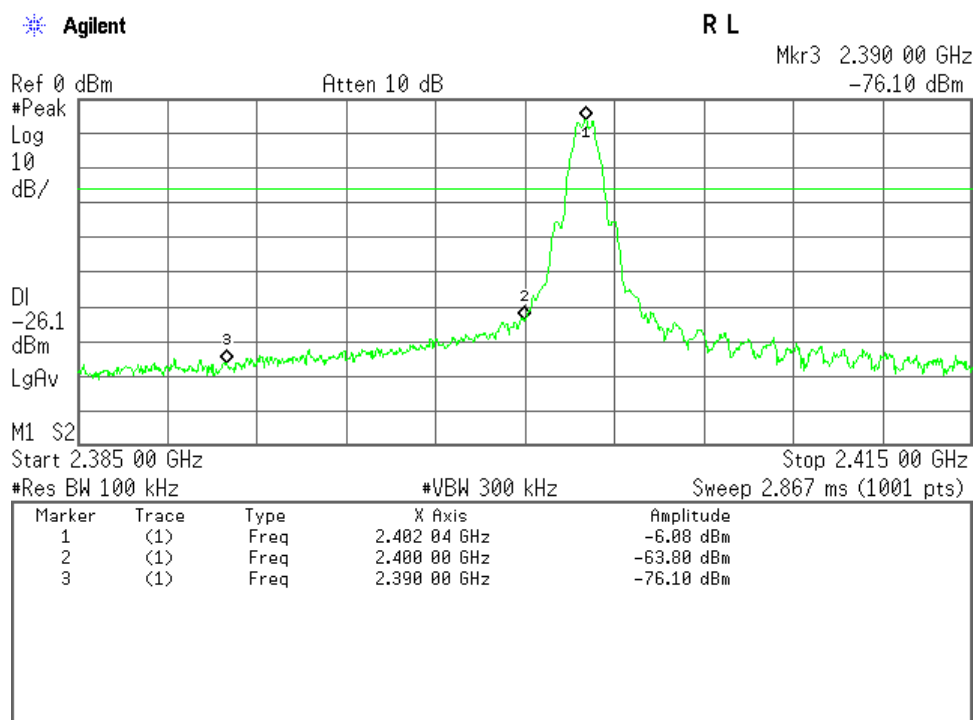

High Channel

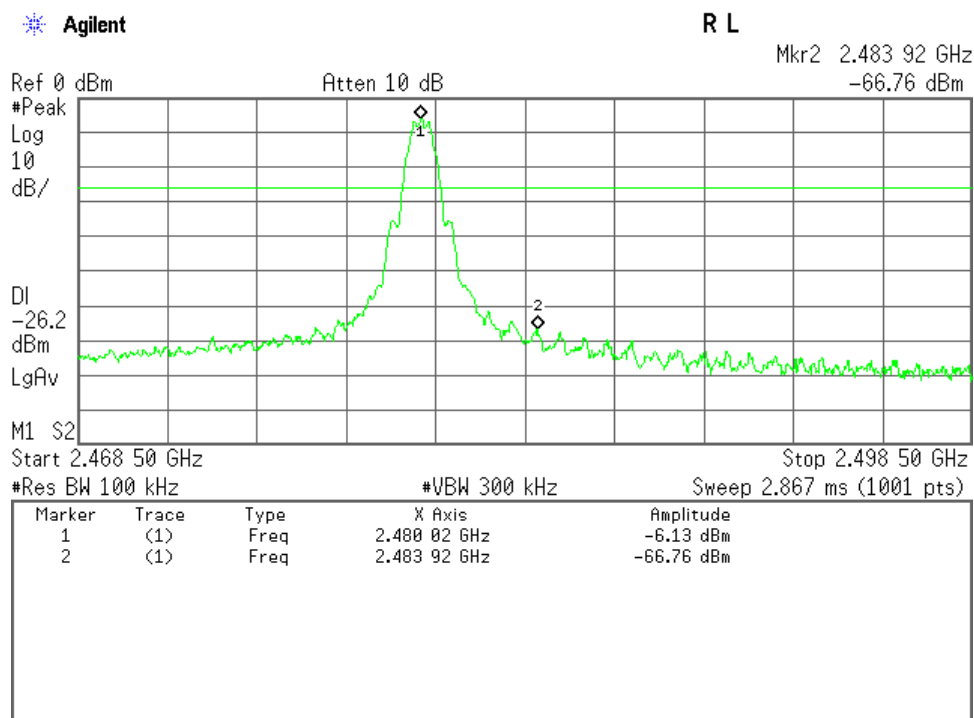

7.8 AC Powerline Conducted Emission

For the requirements, ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

For the limits, ☒ - Passed ☐ - Failed ☐ - Not judged

7.8.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Quasi-Peak) 11.5 dB at 0.55 MHz

Uncertainty of Measurement Results +/-2.6 dB(2 σ)

Remarks : WLAN and Bluetooth LE mode

7.8.2 Test Instruments

Measurement Room M2					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2014/5	1 Year
AMN (main)	KNW-407FR	Kyoritsu	D-103	2014/10	1 Year
RF Cable	RG223/U	SUHNER	H-34	2014/6	1 Year


7.8.3 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

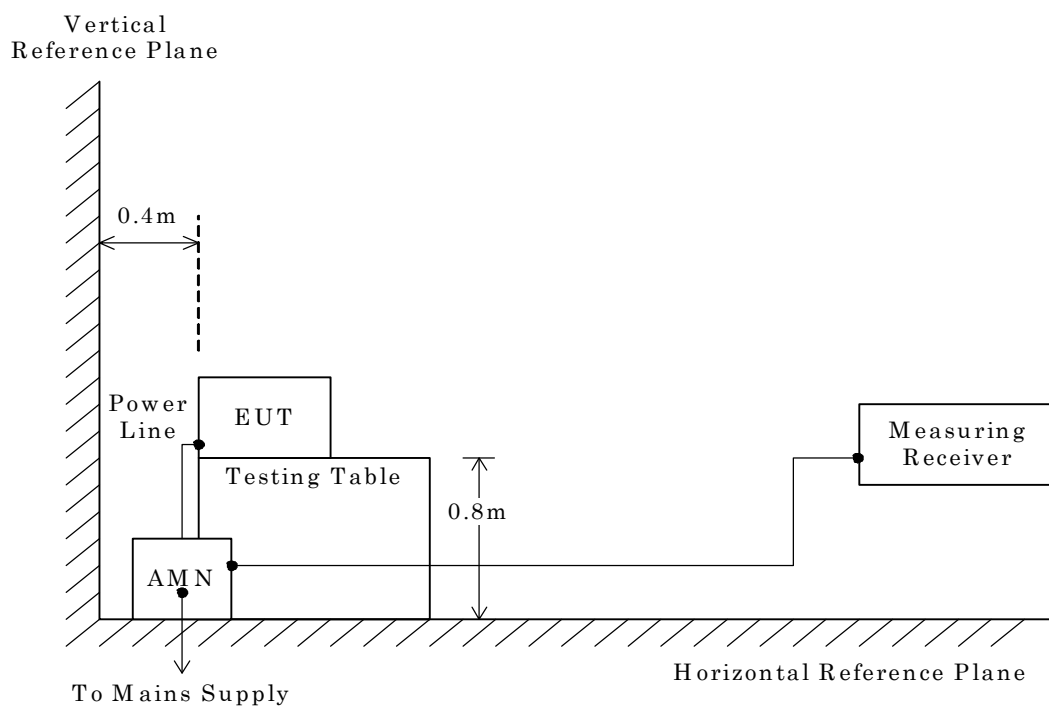

NOTE

AMN : Artificial Mains Network

7.8.4 Test Data

- 1) Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) has been listed.


Test voltage : 120VAC 60Hz

Test Date: March 23, 2015

Temp.: 23 °C, Humi.: 30 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.160	10.3	36.0	--	65.5	55.5	46.3	--	+19.2	--	-
0.230	10.2	30.5	--	62.4	52.4	40.7	--	+21.7	--	-
0.320	10.2	27.1	--	59.7	49.7	37.3	--	+22.4	--	-
0.550	10.2	34.3	--	56.0	46.0	44.5	--	+11.5	--	-
1.470	10.3	22.2	--	56.0	46.0	32.5	--	+23.5	--	-
2.300	10.4	26.7	--	56.0	46.0	37.1	--	+18.9	--	-
3.560	10.4	28.3	--	56.0	46.0	38.7	--	+17.3	--	-
18.090	11.1	20.1	--	60.0	50.0	31.2	--	+28.8	--	-
20.090	11.2	19.8	--	60.0	50.0	31.0	--	+29.0	--	-
22.100	11.2	22.5	--	60.0	50.0	33.7	--	+26.3	--	-

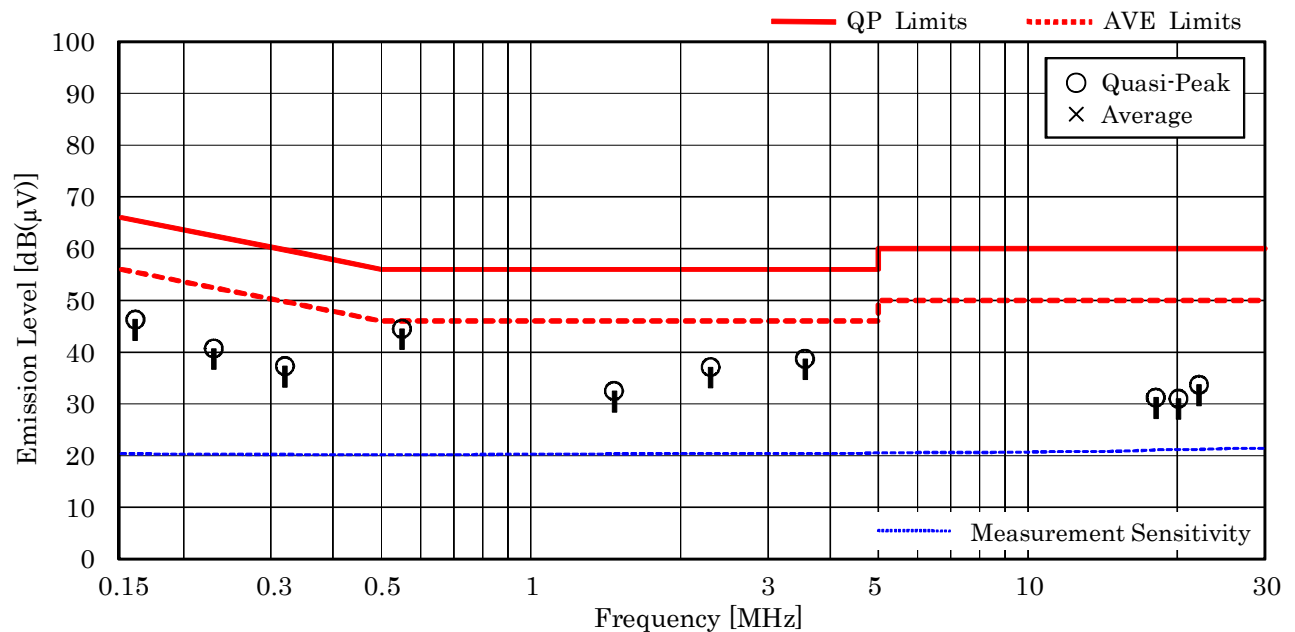

NOTES

- The spectrum was checked from 0.15 MHz to 30 MHz.
- The correction factor includes the AMN insertion loss and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The symbol of "--" means "not applicable".
- Calculated result at 0.550 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.2 + 34.3 = 44.5 dB(μV)
- QP : Quasi-Peak Detector / AVE : Average Detector
- Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


Test voltage : 120VAC 60Hz

Test Date: March 23, 2015

Temp.: 23 °C, Humi.: 30 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.160	10.3	36.8	--	65.5	55.5	47.1	--	+18.4	--	-
0.230	10.2	33.1	--	62.4	52.4	43.3	--	+19.1	--	-
0.320	10.2	27.0	--	59.7	49.7	37.2	--	+22.5	--	-
0.550	10.2	30.4	--	56.0	46.0	40.6	--	+15.4	--	-
1.470	10.3	14.6	--	56.0	46.0	24.9	--	+31.1	--	-
2.300	10.4	17.4	--	56.0	46.0	27.8	--	+28.2	--	-
3.560	10.4	25.6	--	56.0	46.0	36.0	--	+20.0	--	-
18.090	11.2	17.0	--	60.0	50.0	28.2	--	+31.8	--	-
20.090	11.3	18.3	--	60.0	50.0	29.6	--	+30.4	--	-
22.100	11.4	21.3	--	60.0	50.0	32.7	--	+27.3	--	-

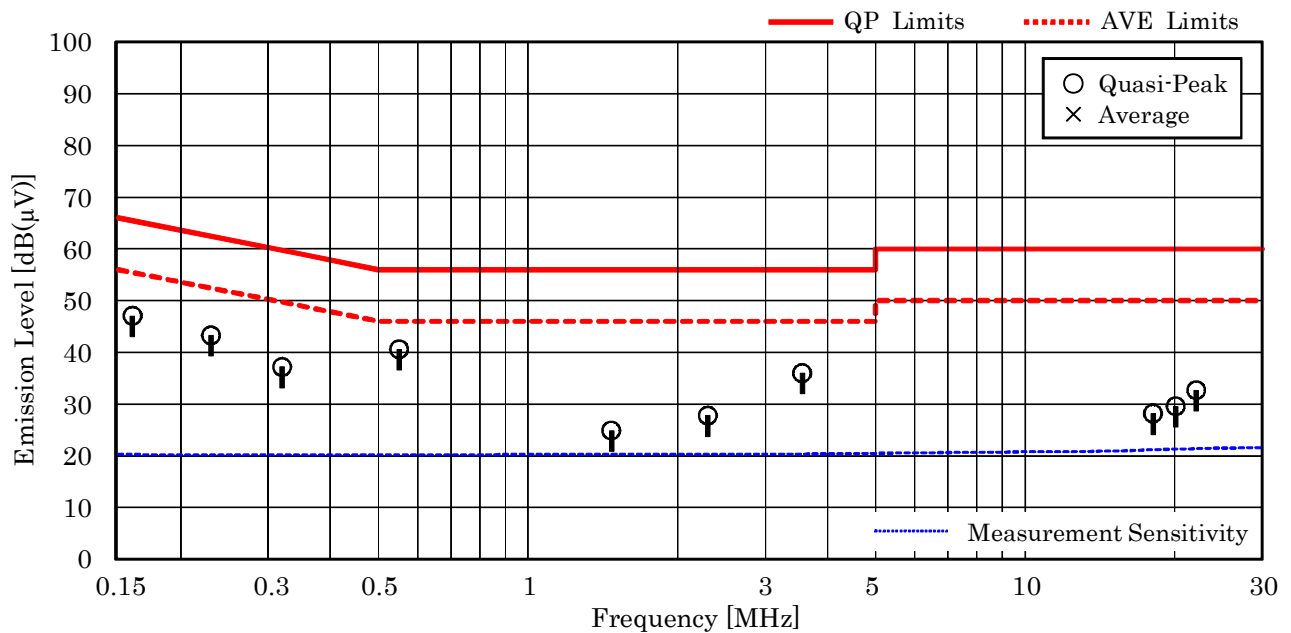

NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.550 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.2 + 30.4 = 40.6 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

2) Mode of EUT : Bluetooth Low Energy


Test voltage : 120VAC 60Hz

Test Date: March 23, 2015

Temp.: 23 °C, Humi.: 30 %

Measured phase : L1

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.170	10.3	30.5	--	65.0	55.0	40.8	--	+24.2	--	-
0.240	10.2	26.4	--	62.1	52.1	36.6	--	+25.5	--	-
0.330	10.2	27.1	--	59.5	49.5	37.3	--	+22.2	--	-
0.550	10.2	34.3	--	56.0	46.0	44.5	--	+11.5	--	-
1.670	10.3	26.4	--	56.0	46.0	36.7	--	+19.3	--	-
2.290	10.4	23.9	--	56.0	46.0	34.3	--	+21.7	--	-
2.480	10.4	27.5	--	56.0	46.0	37.9	--	+18.1	--	-
3.240	10.4	28.8	--	56.0	46.0	39.2	--	+16.8	--	-
3.850	10.4	27.4	--	56.0	46.0	37.8	--	+18.2	--	-
10.330	10.7	17.5	--	60.0	50.0	28.2	--	+31.8	--	-

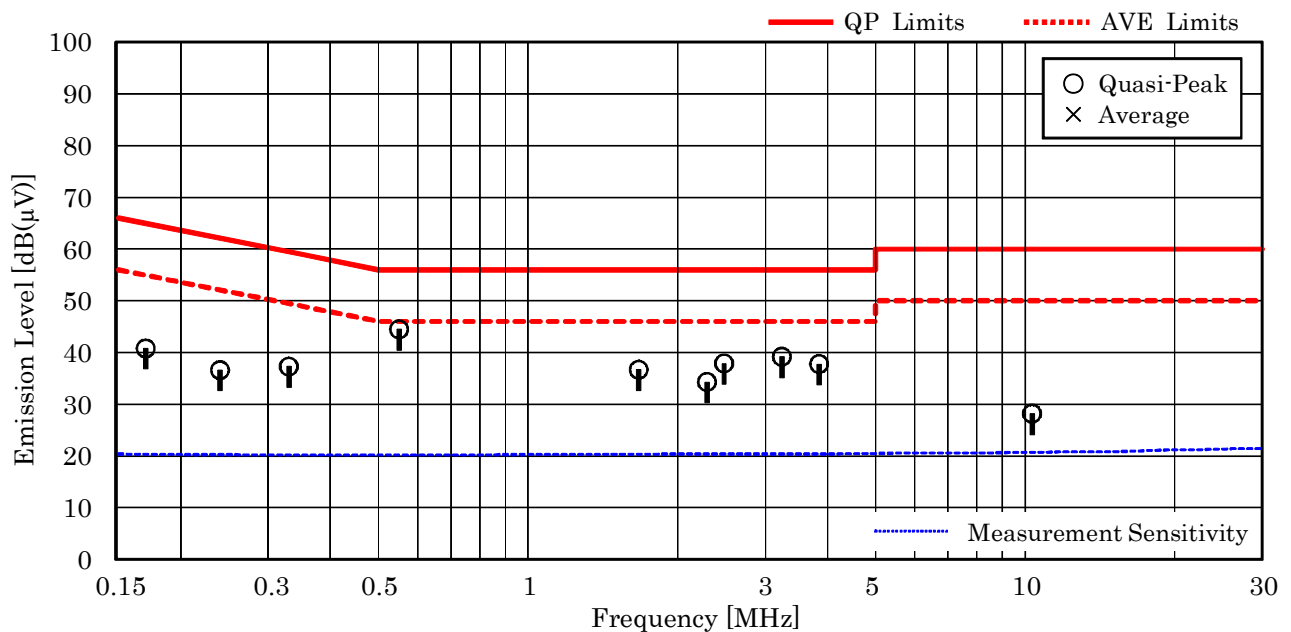

NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.550 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.2 + 34.3 = 44.5 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz


Test voltage : 120VAC 60Hz

Test Date: March 23, 2015

Temp.: 23 °C, Humi.: 30 %

Measured phase : L2

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.170	10.3	33.5	--	65.0	55.0	43.8	--	+21.2	--	-
0.240	10.2	28.8	--	62.1	52.1	39.0	--	+23.1	--	-
0.330	10.2	27.3	--	59.5	49.5	37.5	--	+22.0	--	-
0.550	10.2	27.6	--	56.0	46.0	37.8	--	+18.2	--	-
1.670	10.3	16.0	--	56.0	46.0	26.3	--	+29.7	--	-
2.290	10.4	15.3	--	56.0	46.0	25.7	--	+30.3	--	-
2.480	10.4	19.5	--	56.0	46.0	29.9	--	+26.1	--	-
3.240	10.4	25.1	--	56.0	46.0	35.5	--	+20.5	--	-
3.850	10.4	25.3	--	56.0	46.0	35.7	--	+20.3	--	-
10.330	10.8	15.1	--	60.0	50.0	25.9	--	+34.1	--	-

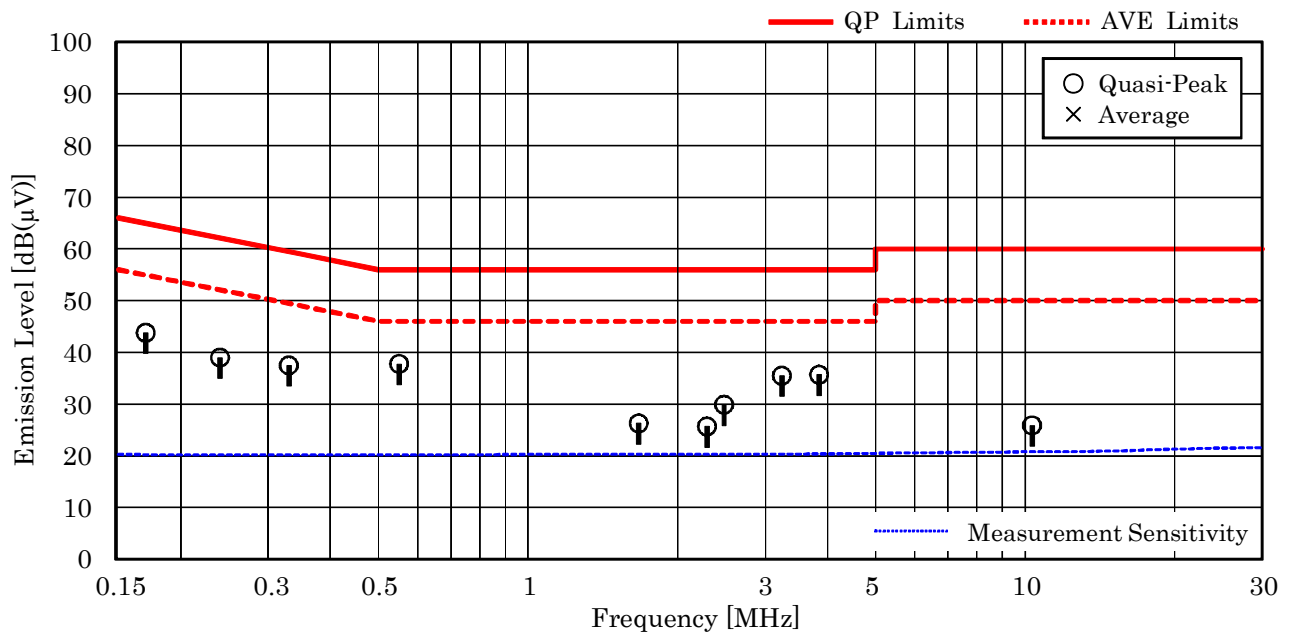

NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.550 MHz, as the worst point shown on underline:
Correction Factor + Meter Reading (QP) = 10.2 + 27.6 = 37.8 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

7.9 Radiated Emission

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

7.9.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Peak)	<u>3.0</u> dB	at	<u>2484.3</u> MHz
Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>+/-3.0</u>	dB(2σ)
	30 MHz – 300 MHz	<u>+/-3.8</u>	dB(2σ)
	300 MHz – 1000 MHz	<u>+/-4.8</u>	dB(2σ)
	1 GHz – 6 GHz	<u>+/-4.7</u>	dB(2σ)
	6 GHz – 18 GHz	<u>+/-4.6</u>	dB(2σ)
	18 GHz – 40 GHz	<u>+/-5.5</u>	dB(2σ)

Remarks : IEEE802.11n mode, Y axis position. The measurement result is within the range of measurement uncertainty.

7.9.2 Test Instruments

Anechoic Chamber A2					
Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2014/5	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-2	2014/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2014/8	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2014/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2014/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2014/4	1 Year
Site Attenuation	--	----	H-15	2015/1	1 Year
Pre-Amplifier	TPA0118-36	TOYO	A-37	2014/5	1 Year
Pre-Amplifier	RP1826G-45H	EMCS	A-53	2014/7	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2014/7	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2014/7	1 Year
Horn Antenna	3160-04	EMCO	C-55	2014/6	1 Year
Horn Antenna	3160-05	EMCO	C-56	2014/6	1 Year
Horn Antenna	3160-06	EMCO	C-57	2014/6	1 Year
Horn Antenna	3160-07	EMCO	C-58	2014/6	1 Year
Horn Antenna	3160-08	EMCO	C-59	2014/6	1 Year
Horn Antenna	3160-09	EMCO	C-48	2014/7	1 Year
Attenuator	54A-10	Weinschel	D-29	2014/9	1 Year
Attenuator	2-10	Weinschel	D-79	2014/11	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2015/2	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2015/1	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2015/1	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2015/2	1 Year
SVSWR	--	----	H-19	2015/2	1 Year
Pre-Amplifier	310N	SONOMA	A-17	2014/4	1 Year

7.9.3 Test Method and Test Setup (Diagrammatic illustration)


7.9.3.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

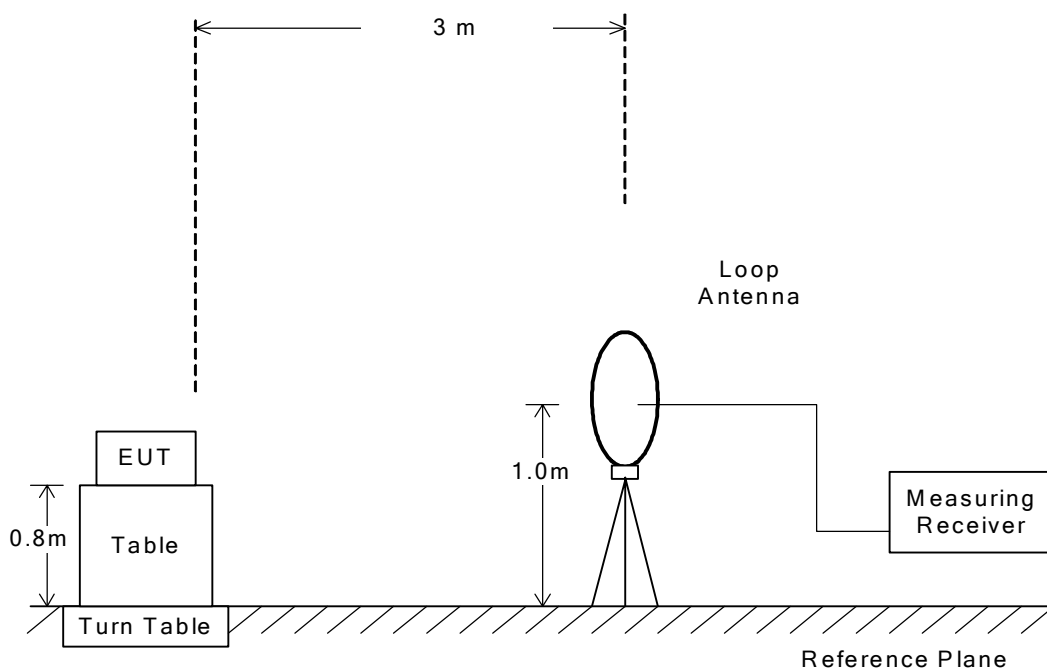


7.9.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

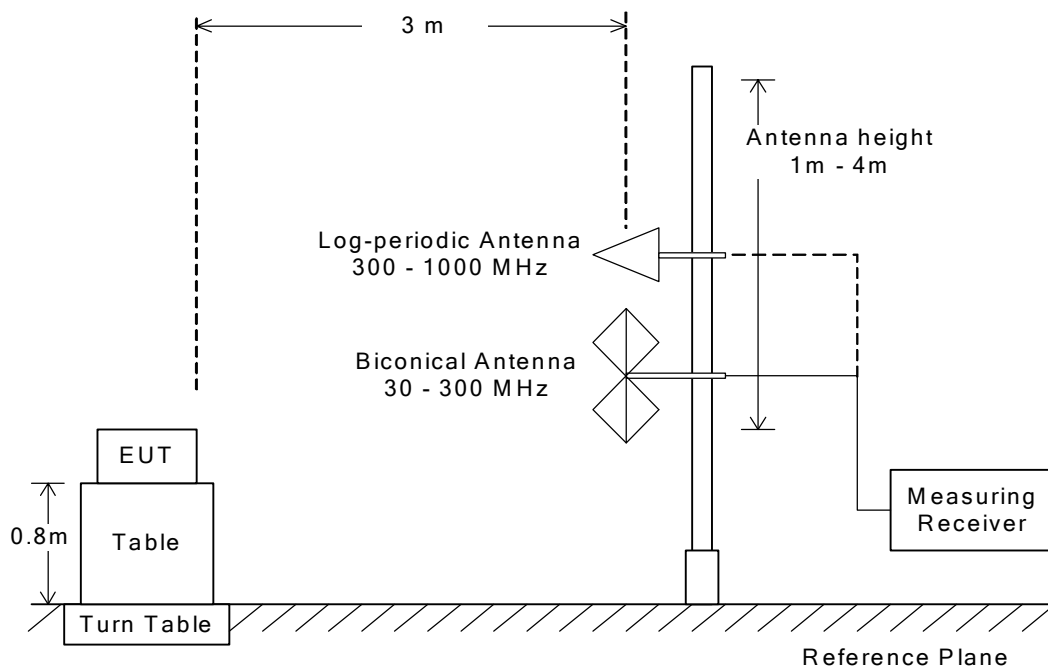

7.9.3.3 Radiated Emission above 1 GHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.


This configurations was used for the final tests.

The setting of the measuring instruments are shown as follows:

Type	Peak	Average
Detector Function	Peak	Peak
Res. Bandwidth	1 MHz	1 MHz
Video Bandwidth	3 MHz	$\geq 1/T * 1)$
Video Filtering	Linear Voltage	Linear Voltage
Sweep Time	AUTO	AUTO
Trace	Max Hold	Max Hold

Note: 1. T: Minimum transmission duration

– Side View –

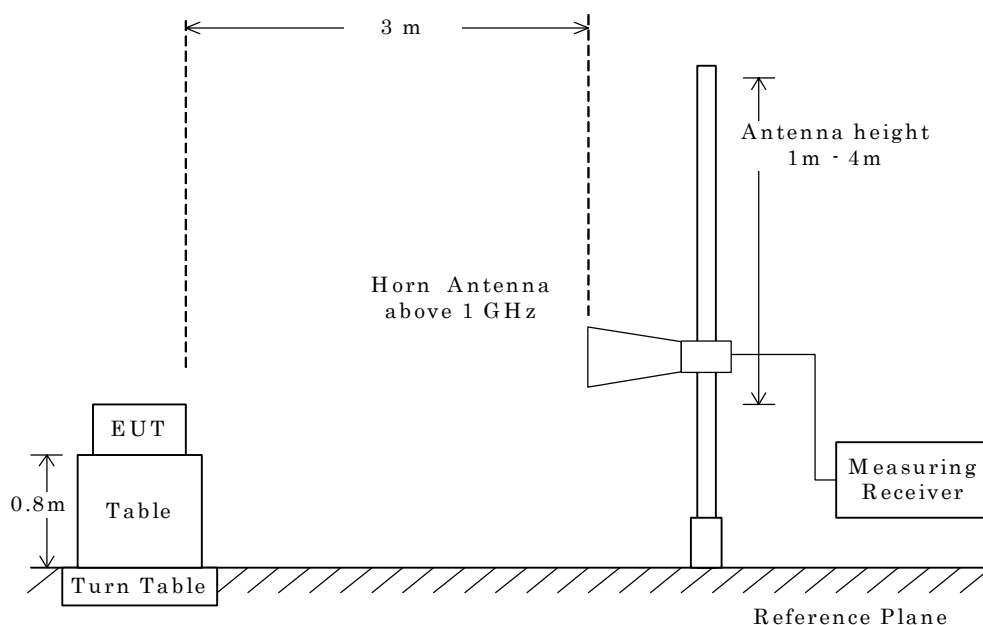

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

7.9.4 Test Data


7.9.4.1 Band-edge Compliance

Test Date : March 12, 2015

Temp.:23°C, Humi:30%

Mode of EUT : 1TX: ANT0 (1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

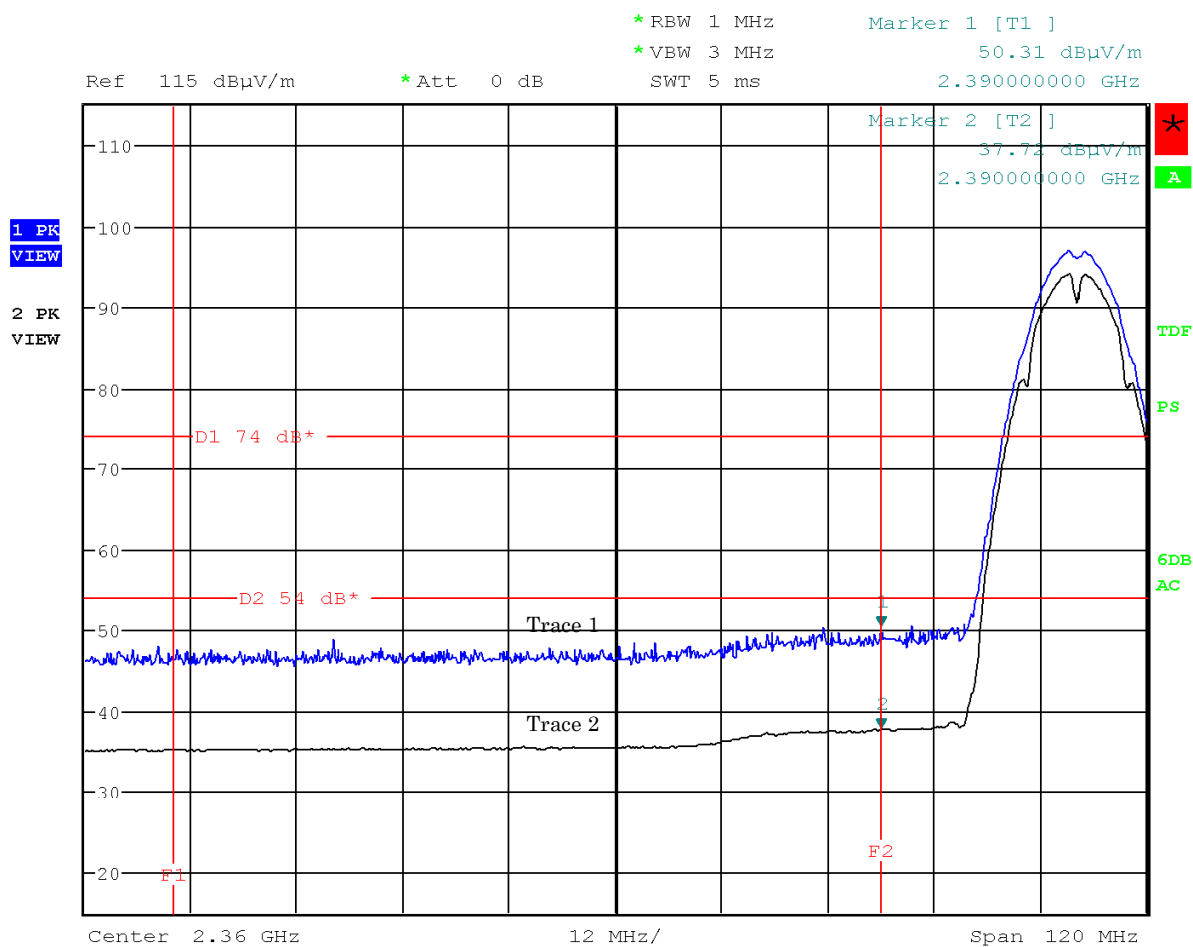

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

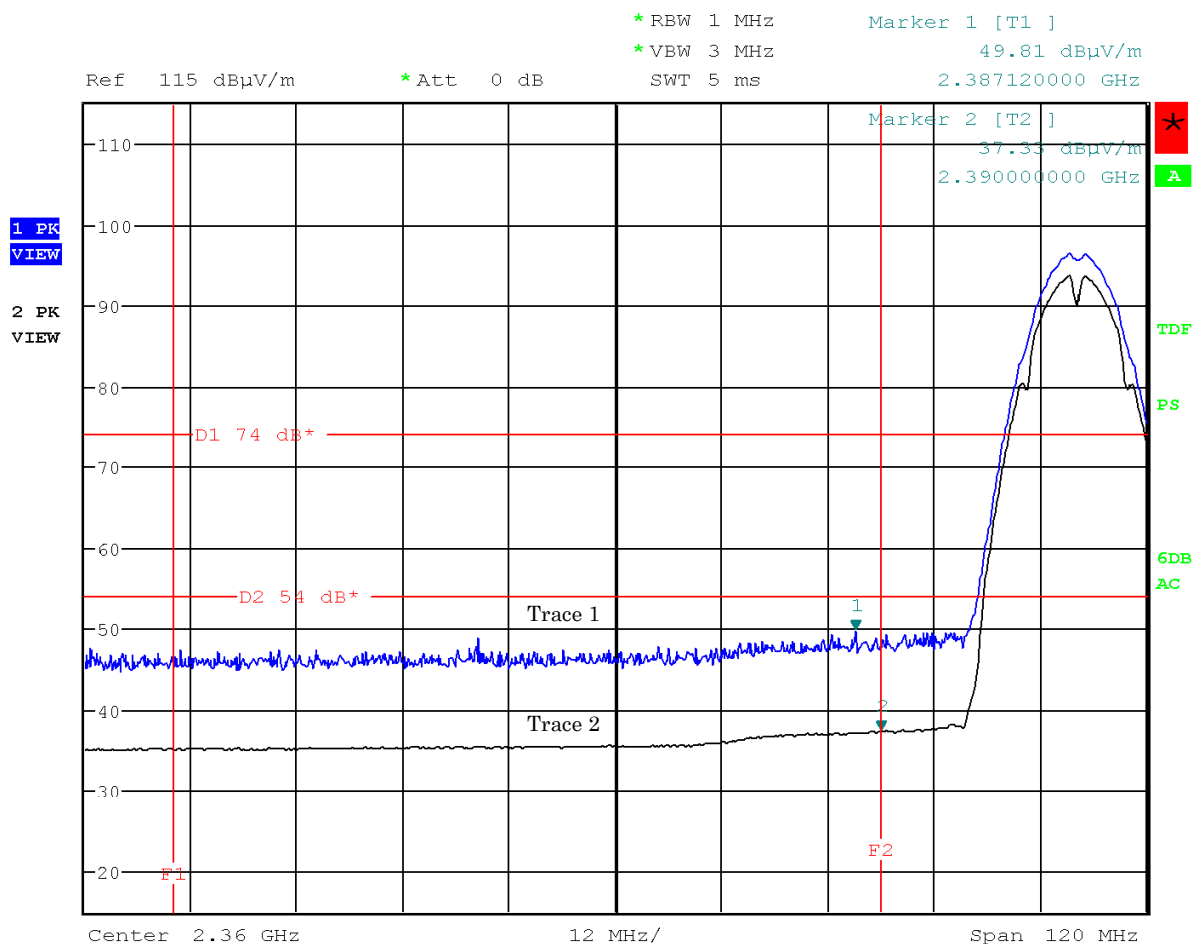

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

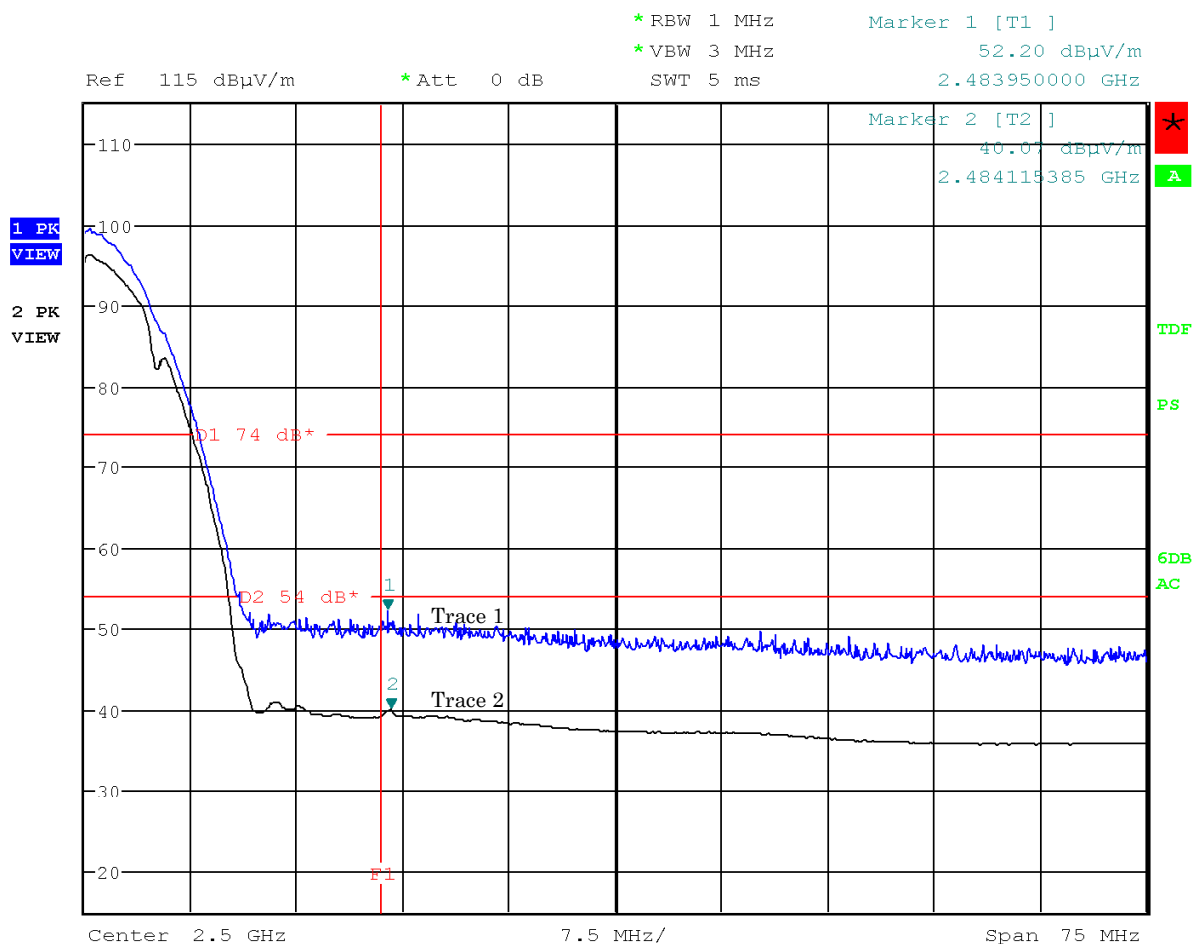

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

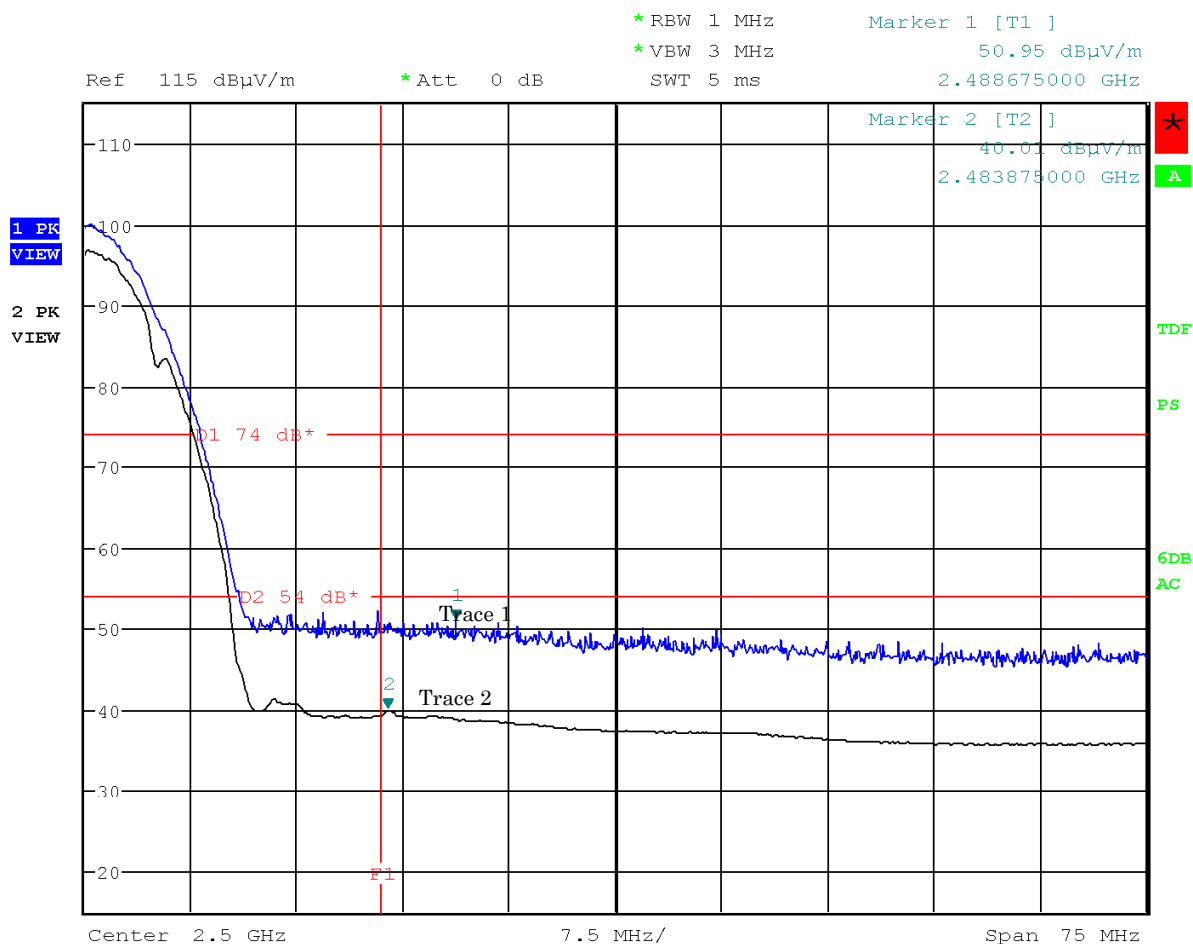

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

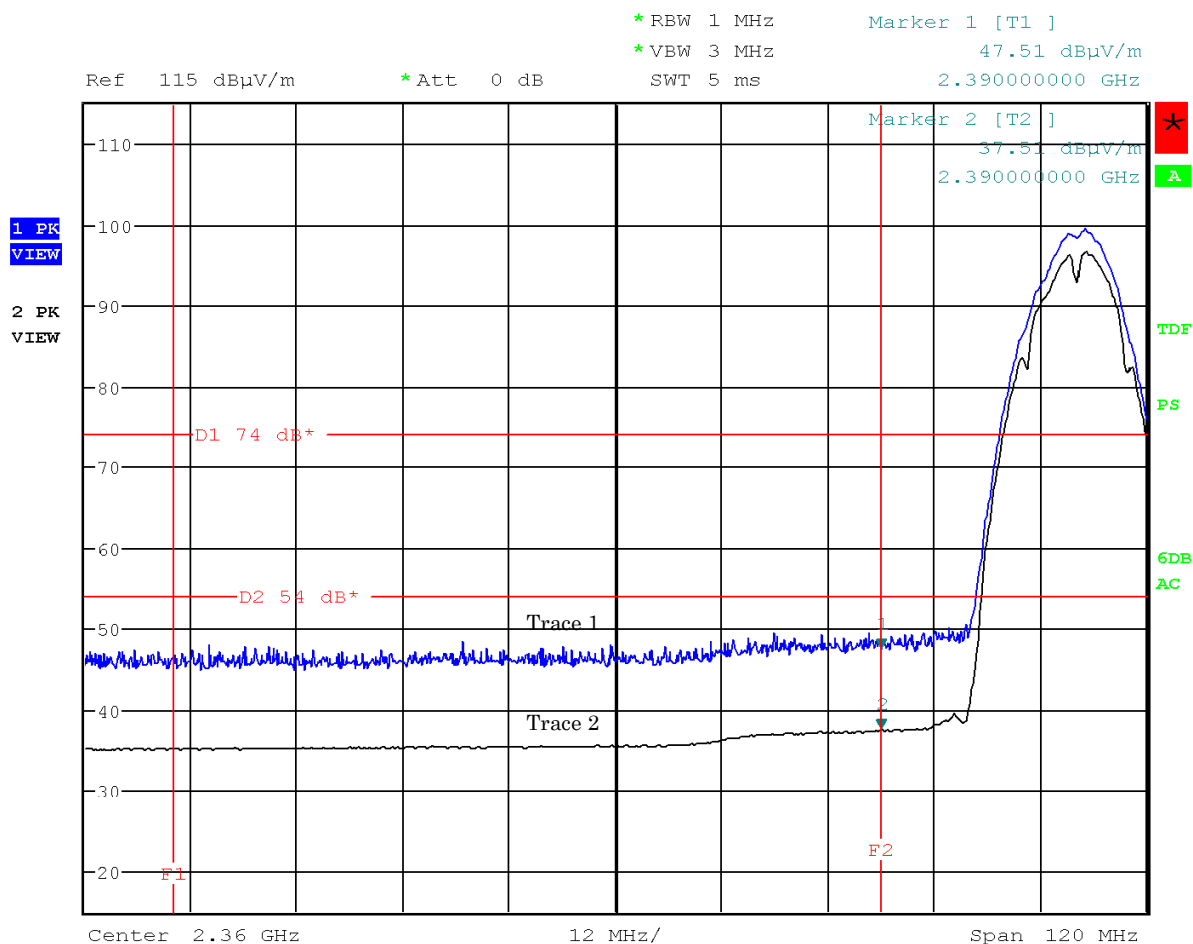

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (1ch: 2412 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

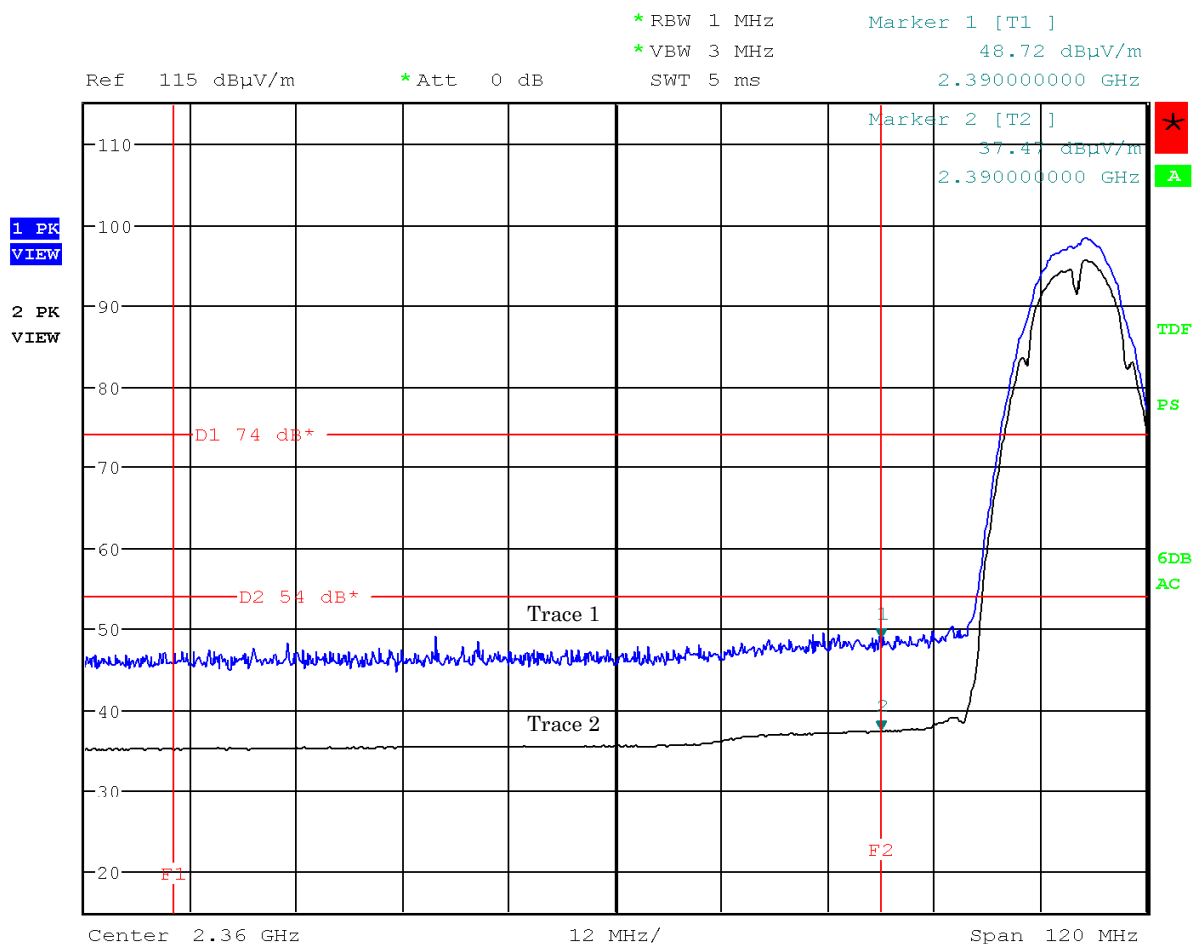

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Horizontal

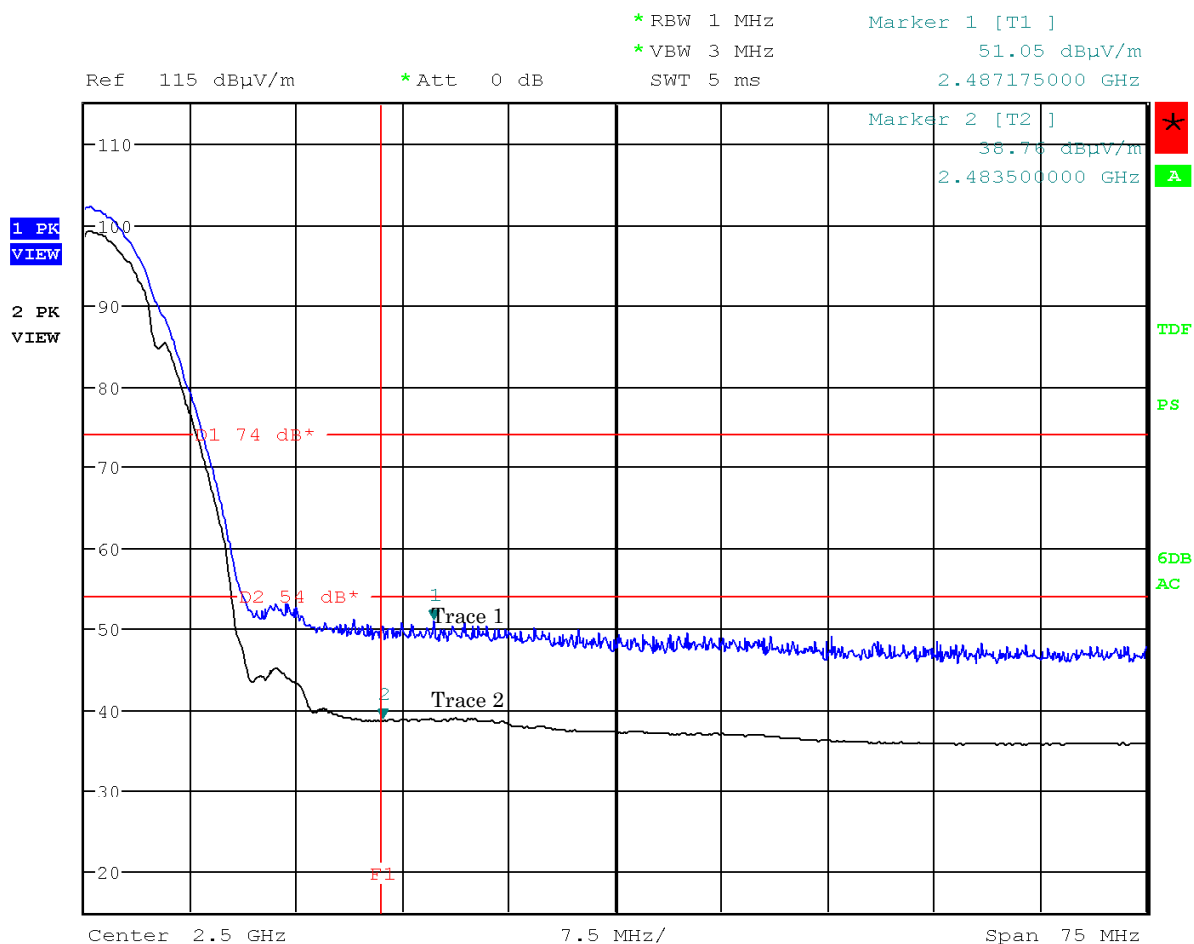

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (11ch: 2462 MHz, (IEEE 802.11b))


Antenna Polarization : Vertical

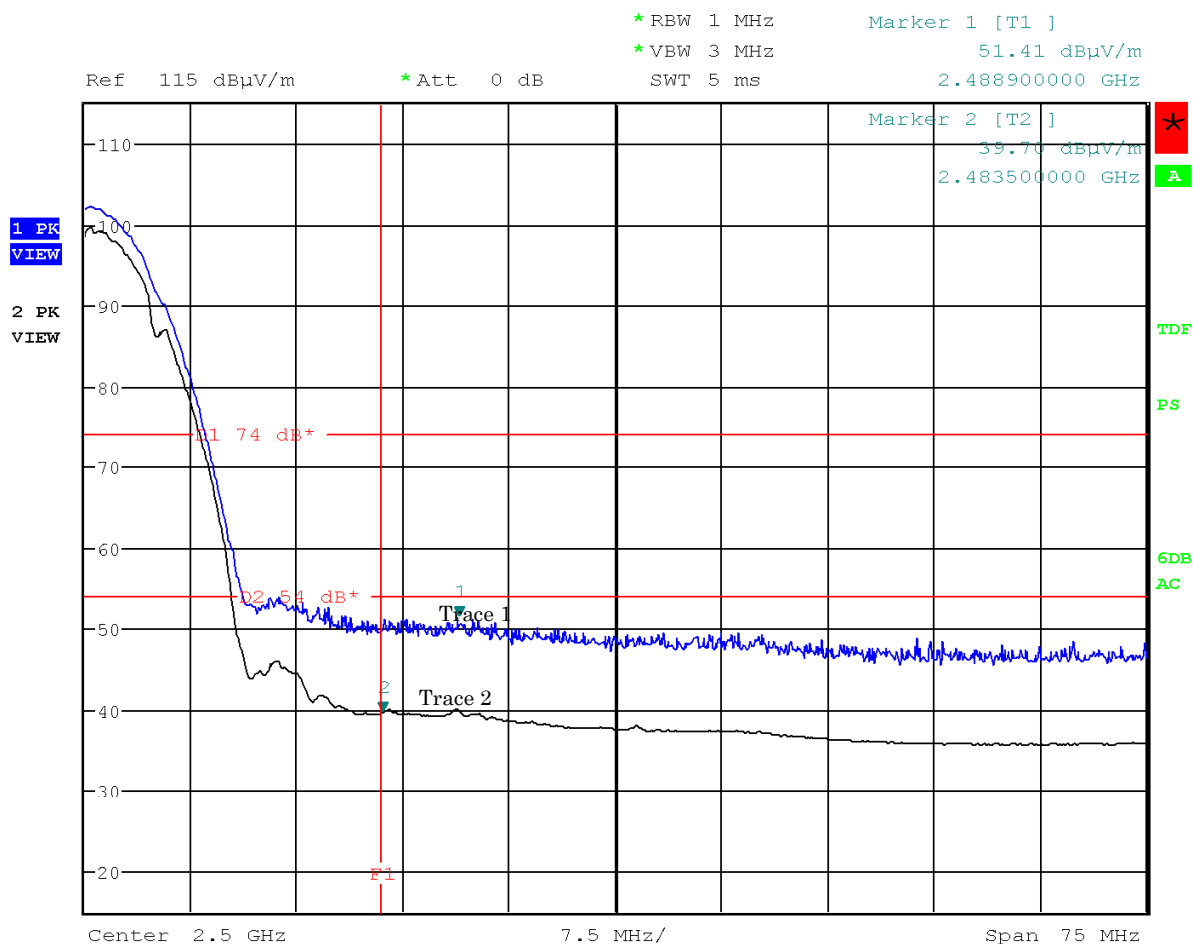

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

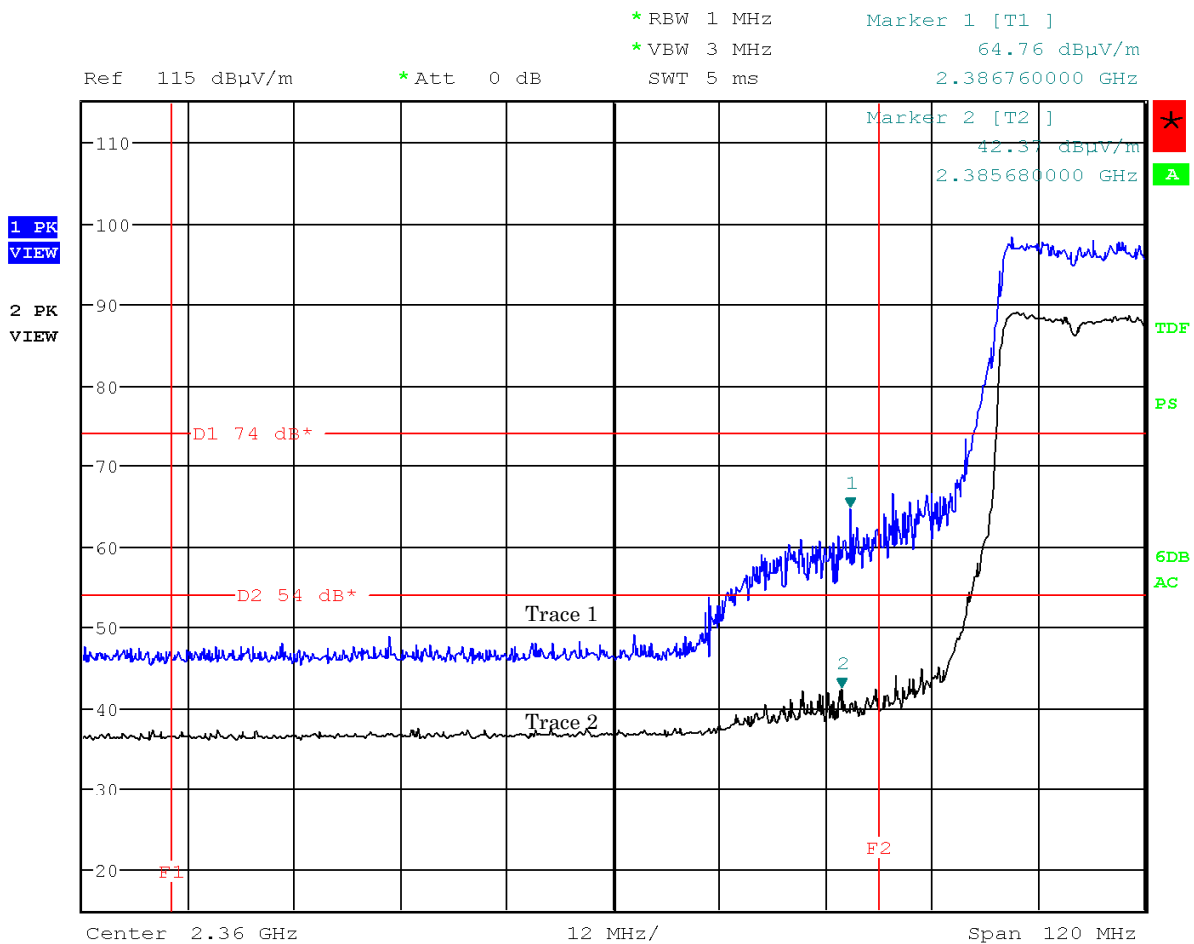

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

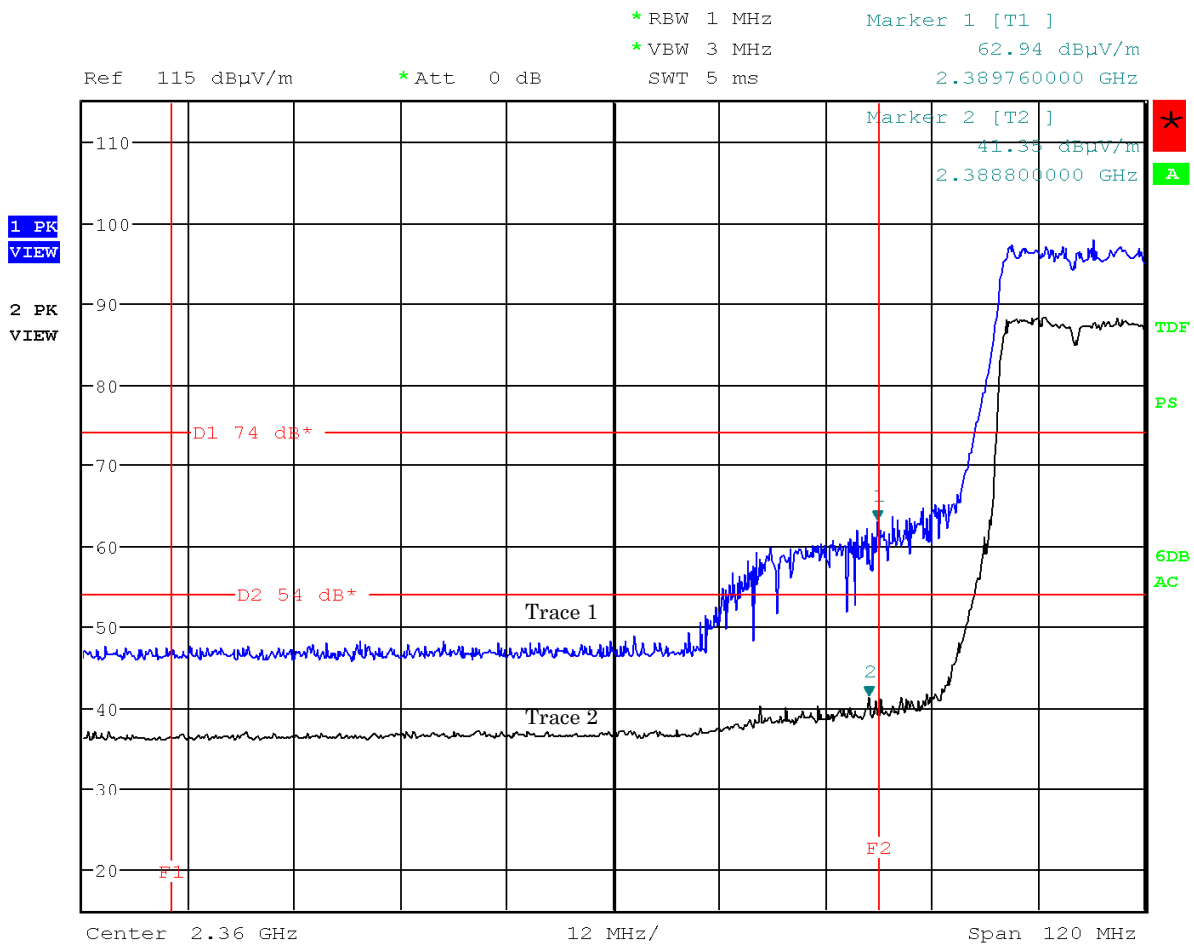

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

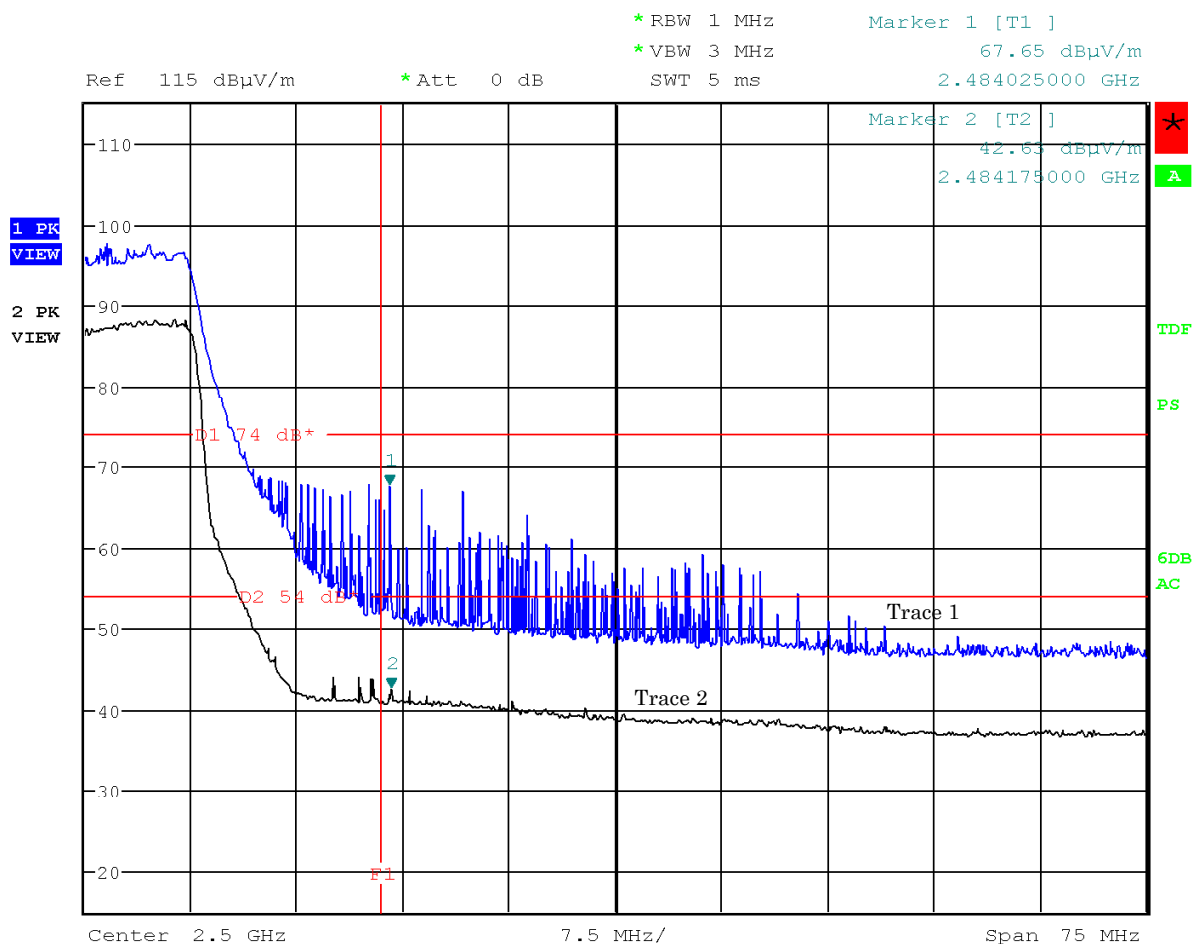

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

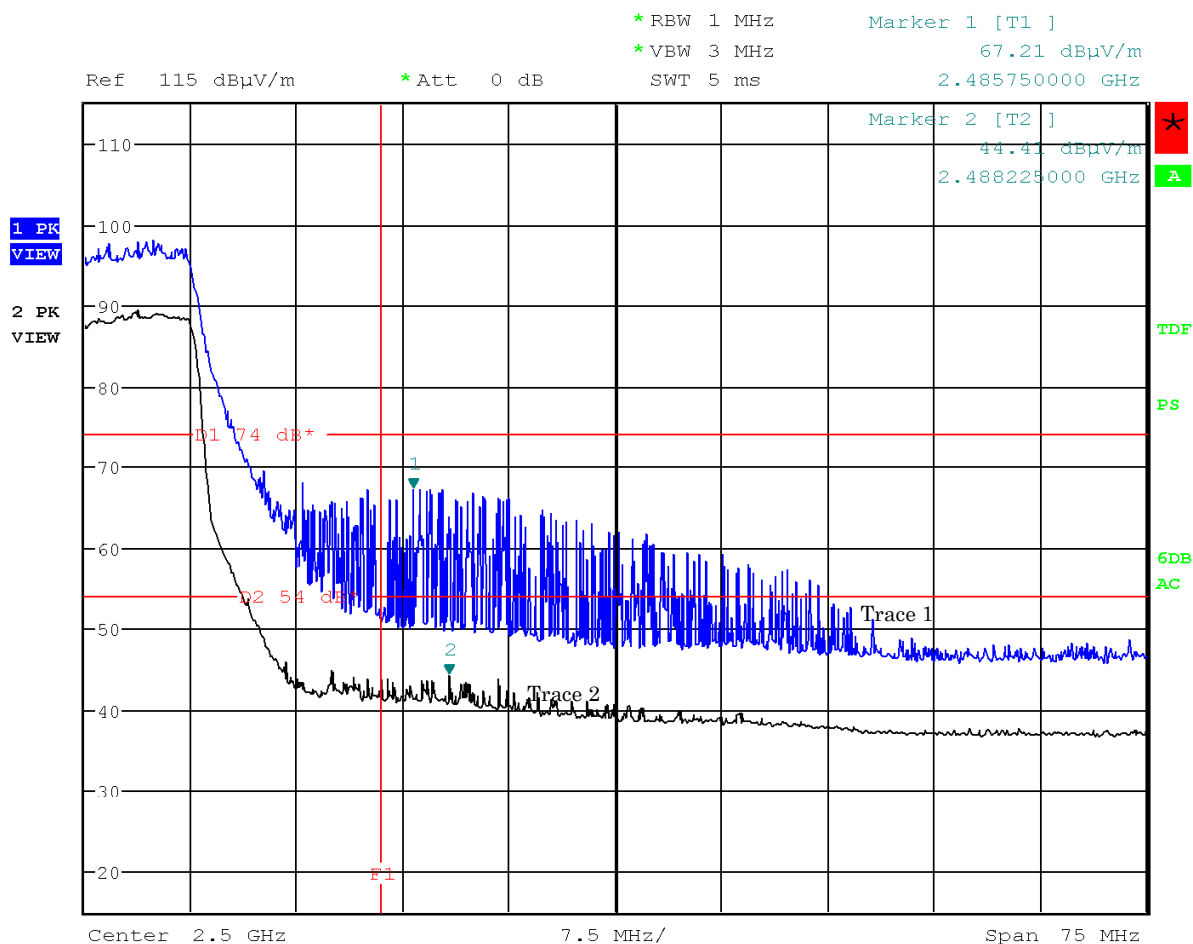

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

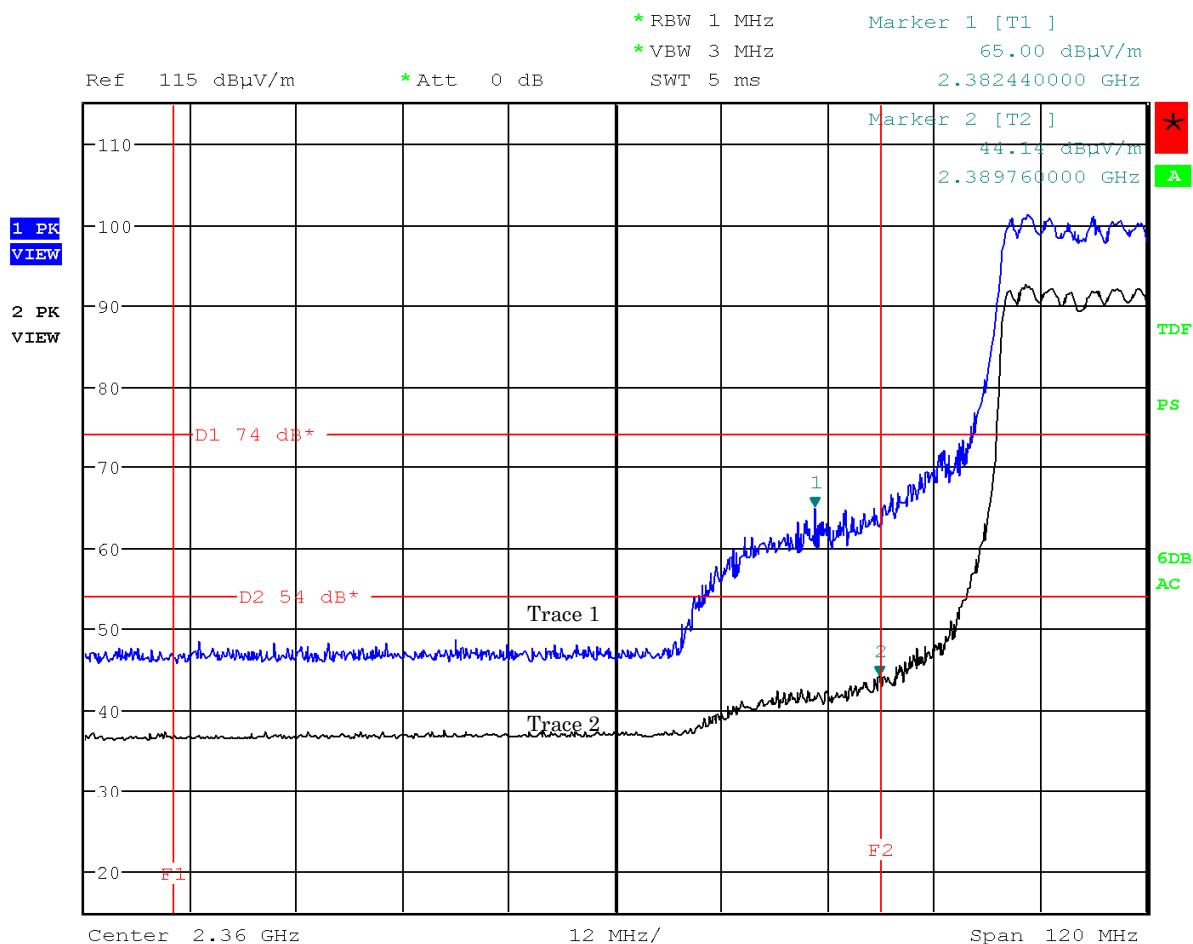

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (1ch: 2412 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

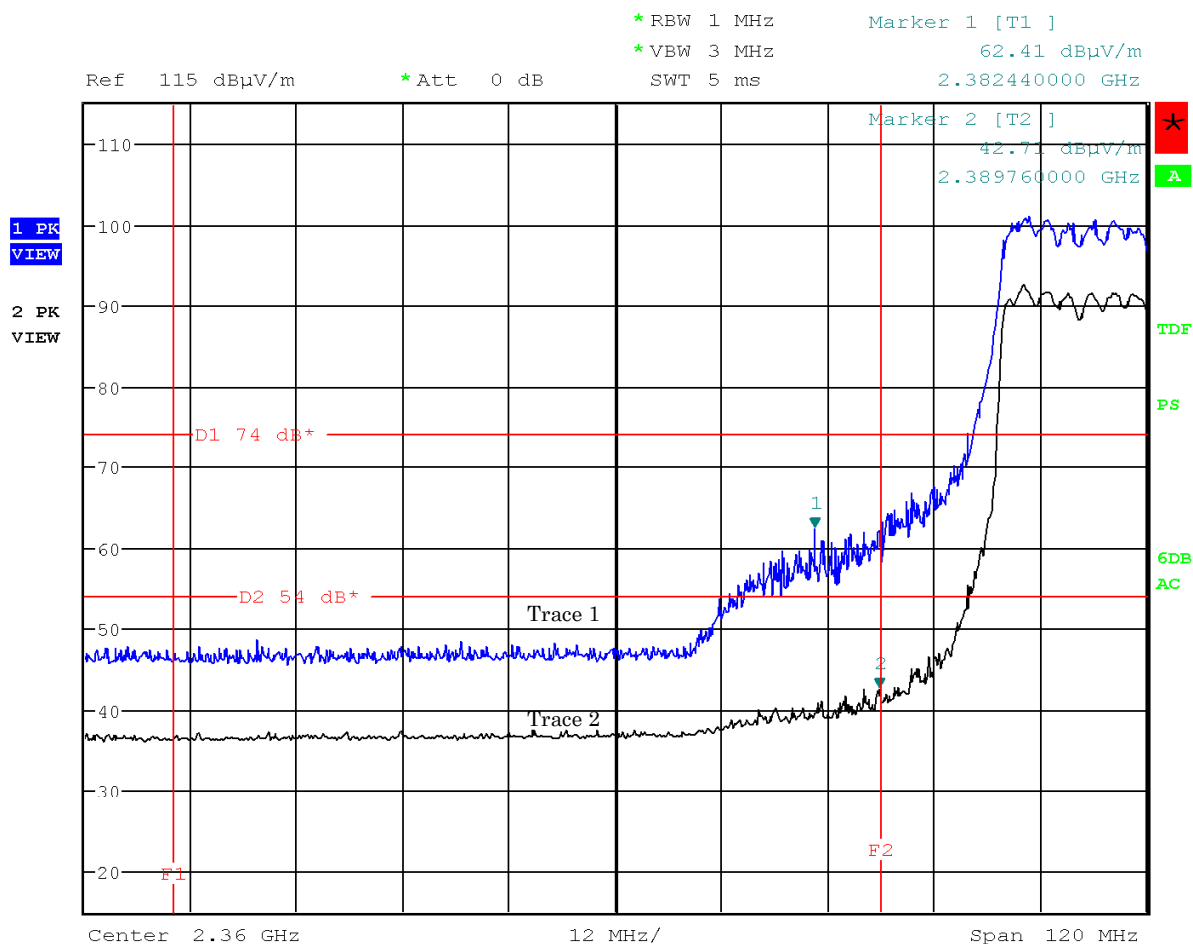

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Horizontal

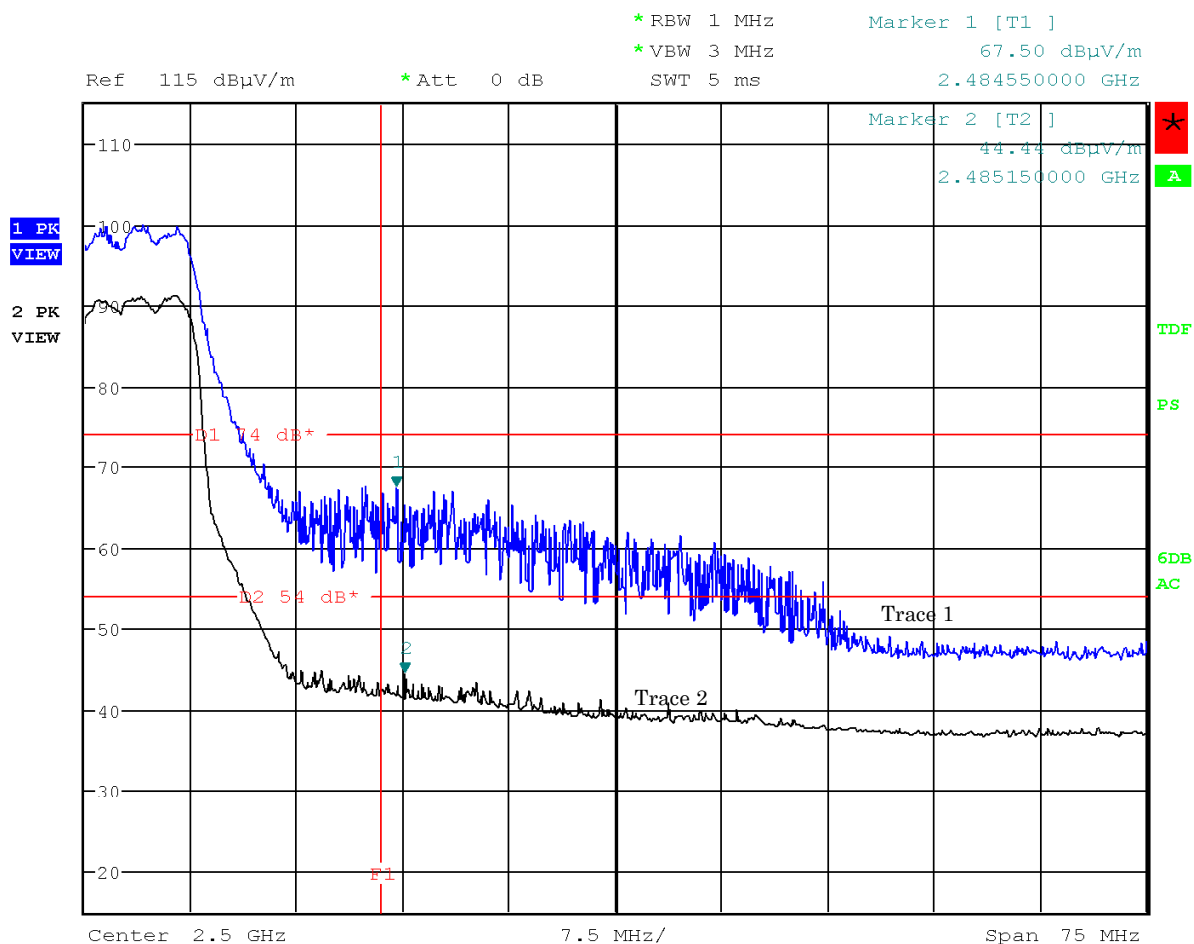

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (11ch: 2462 MHz, (IEEE 802.11g))


Antenna Polarization : Vertical

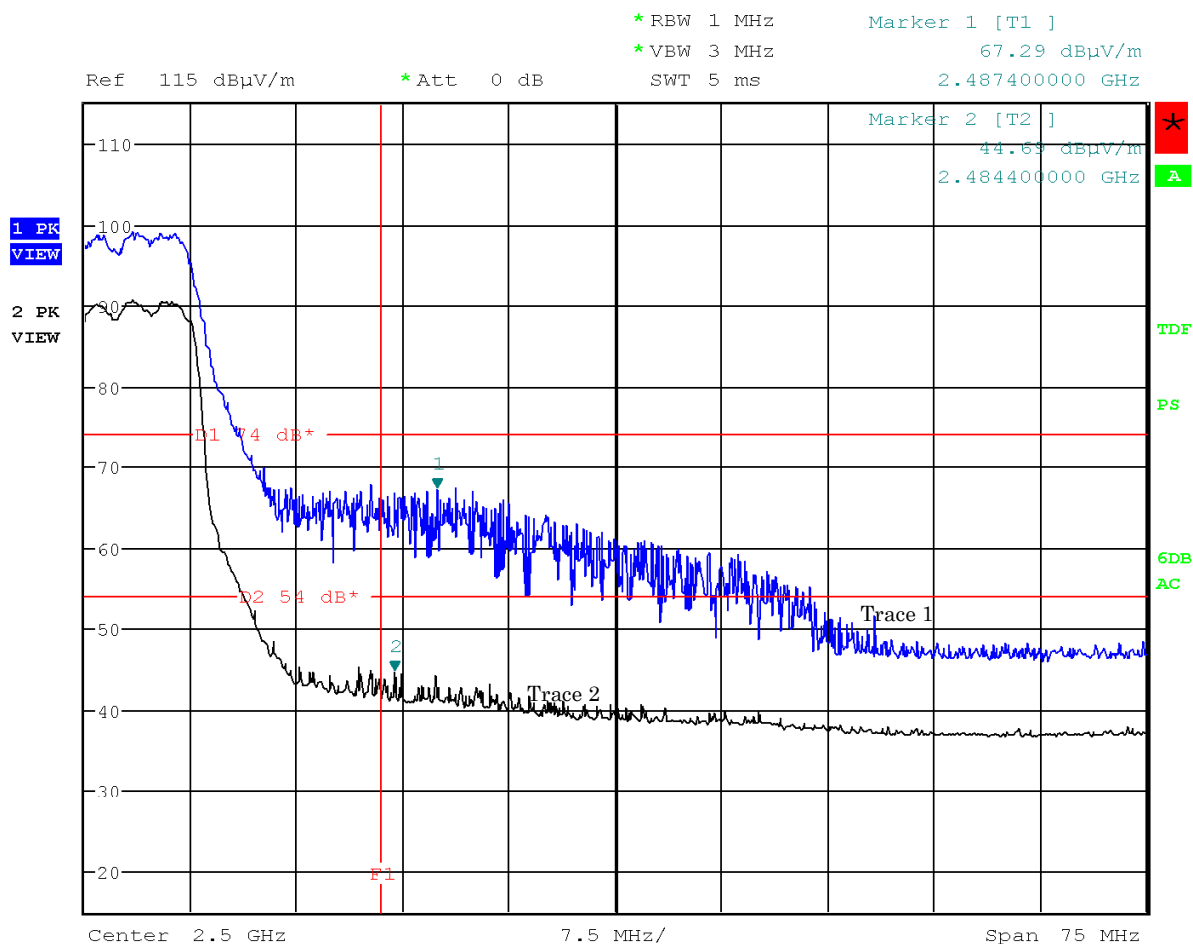

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

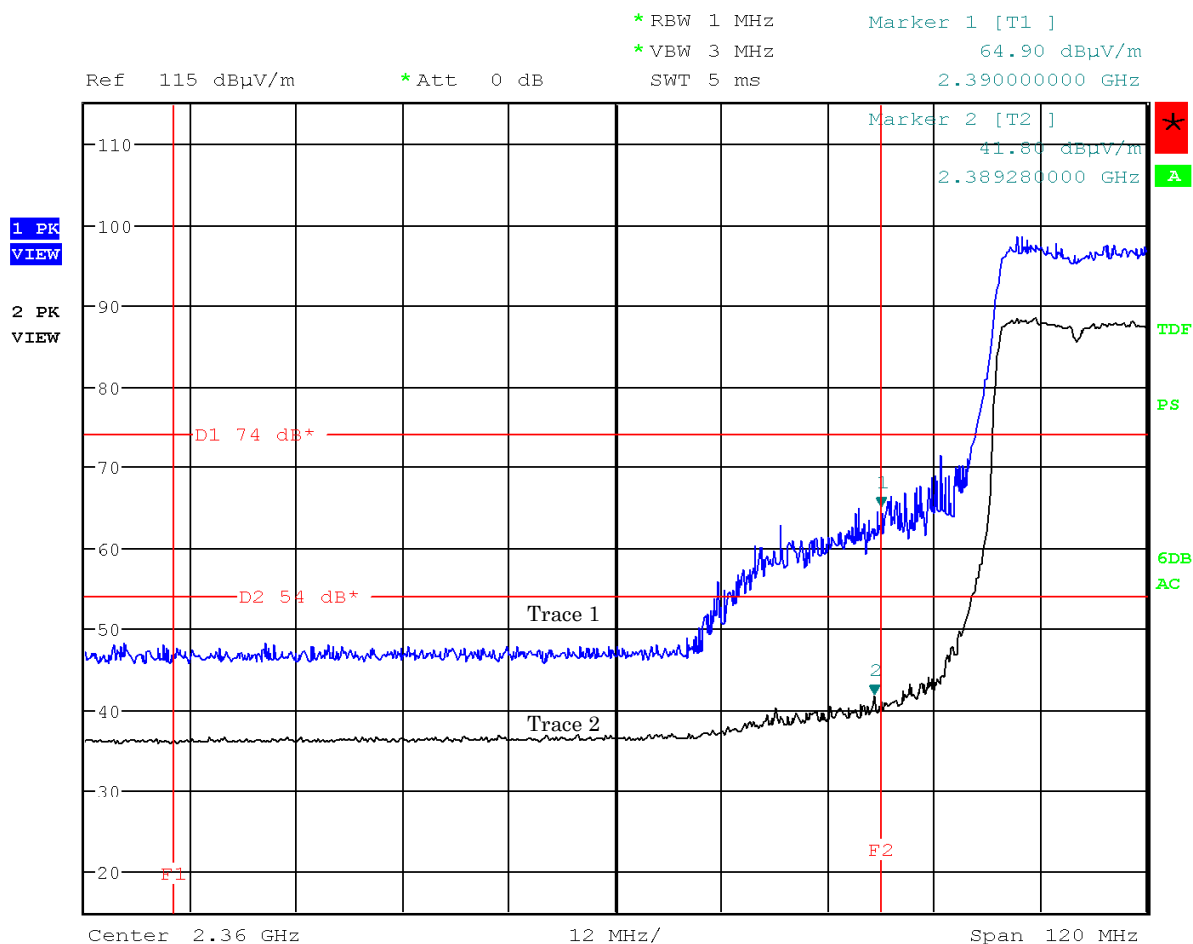

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

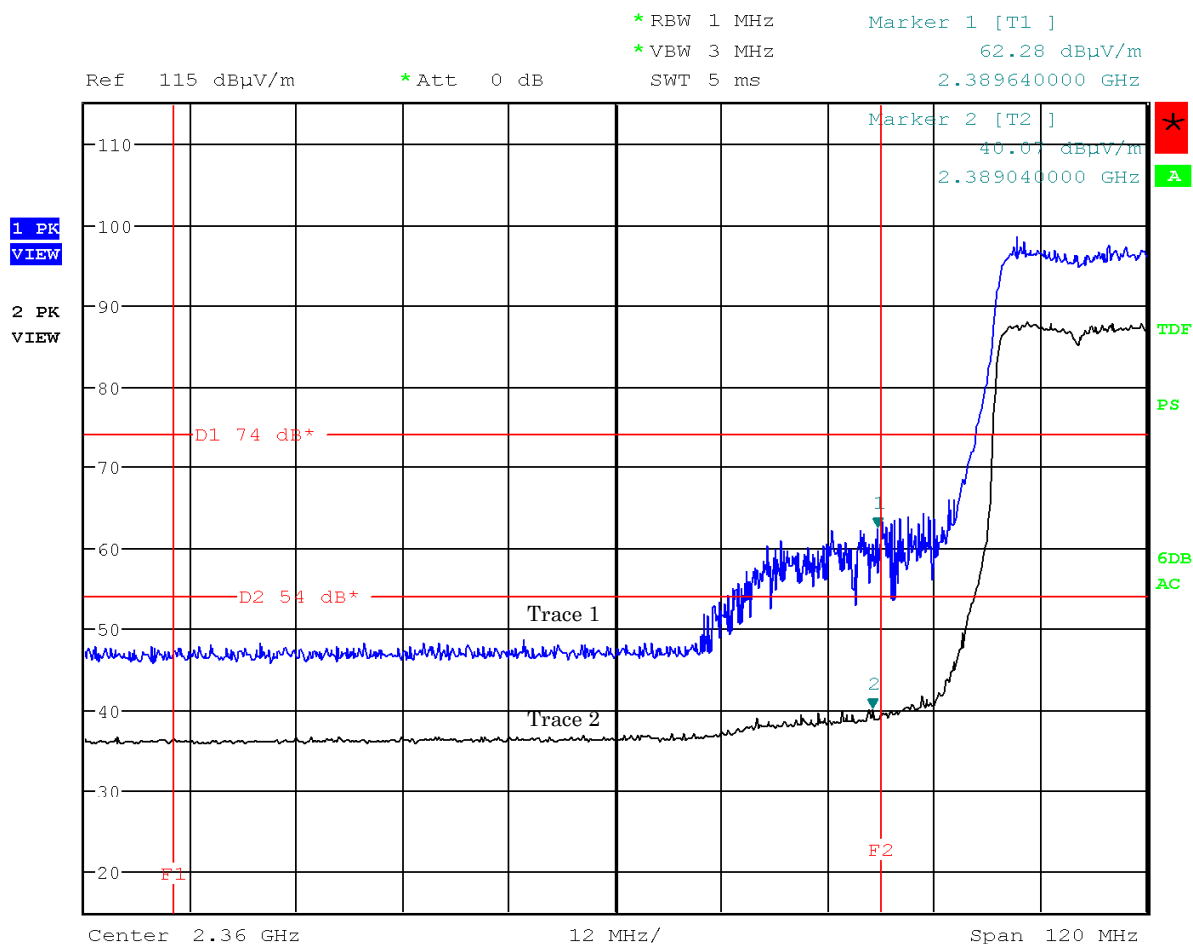

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

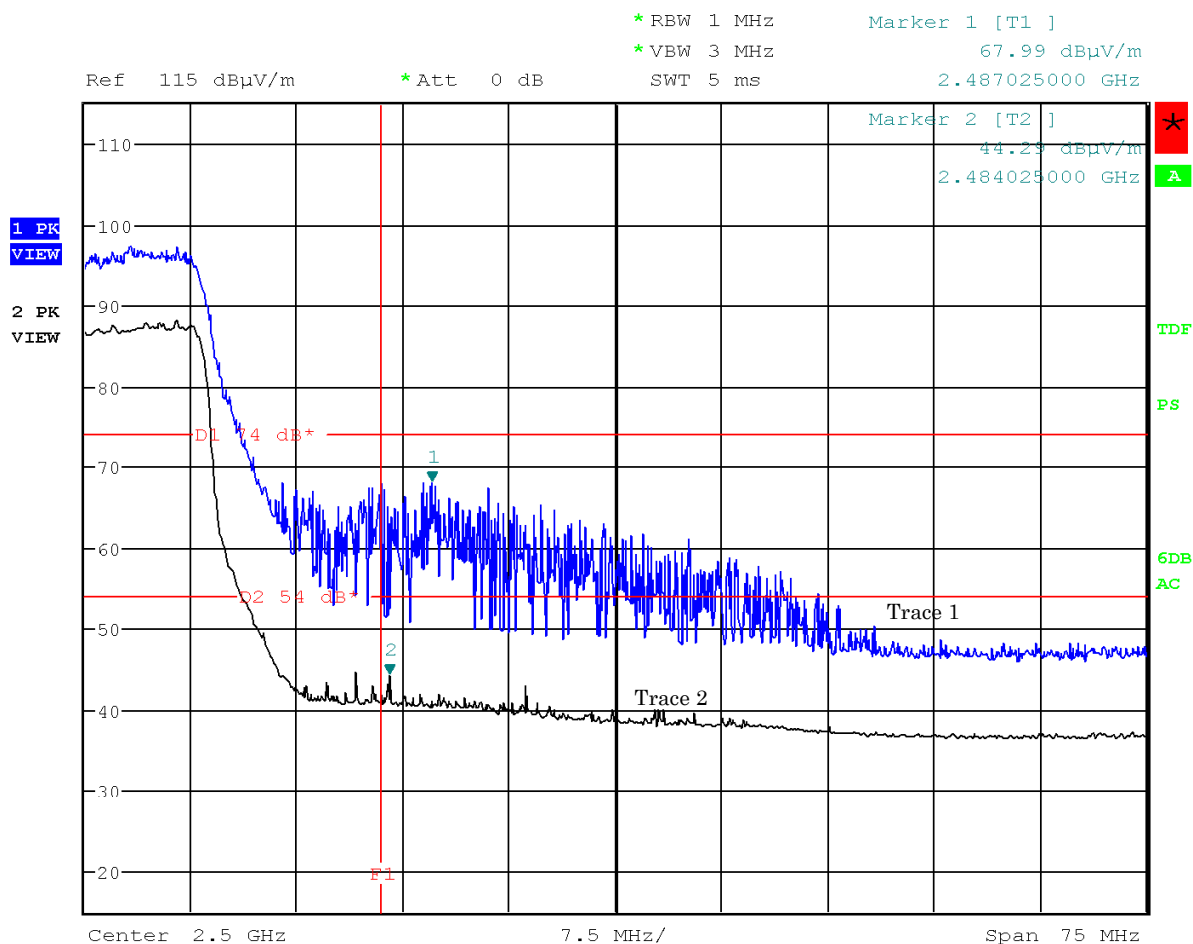

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 1TX: ANT0 (11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

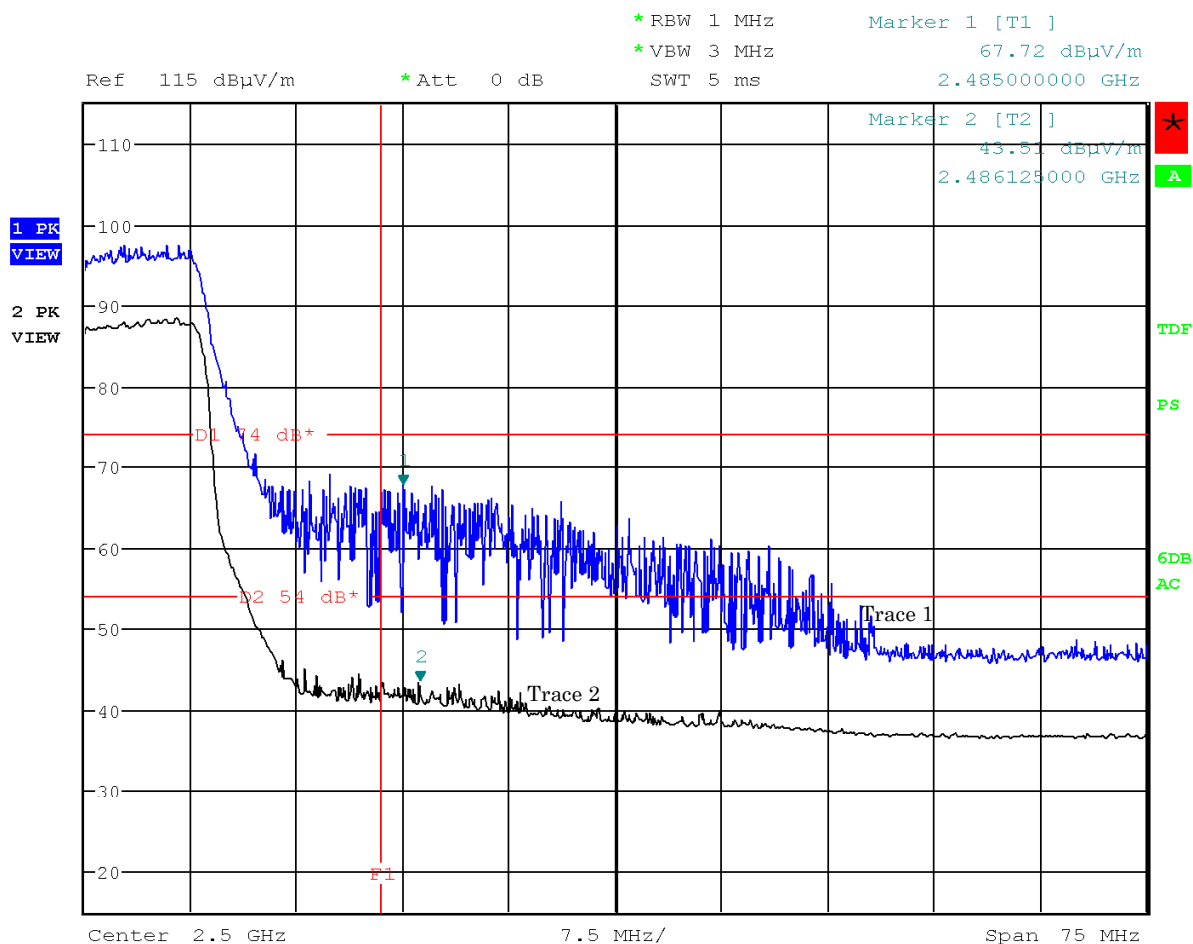

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

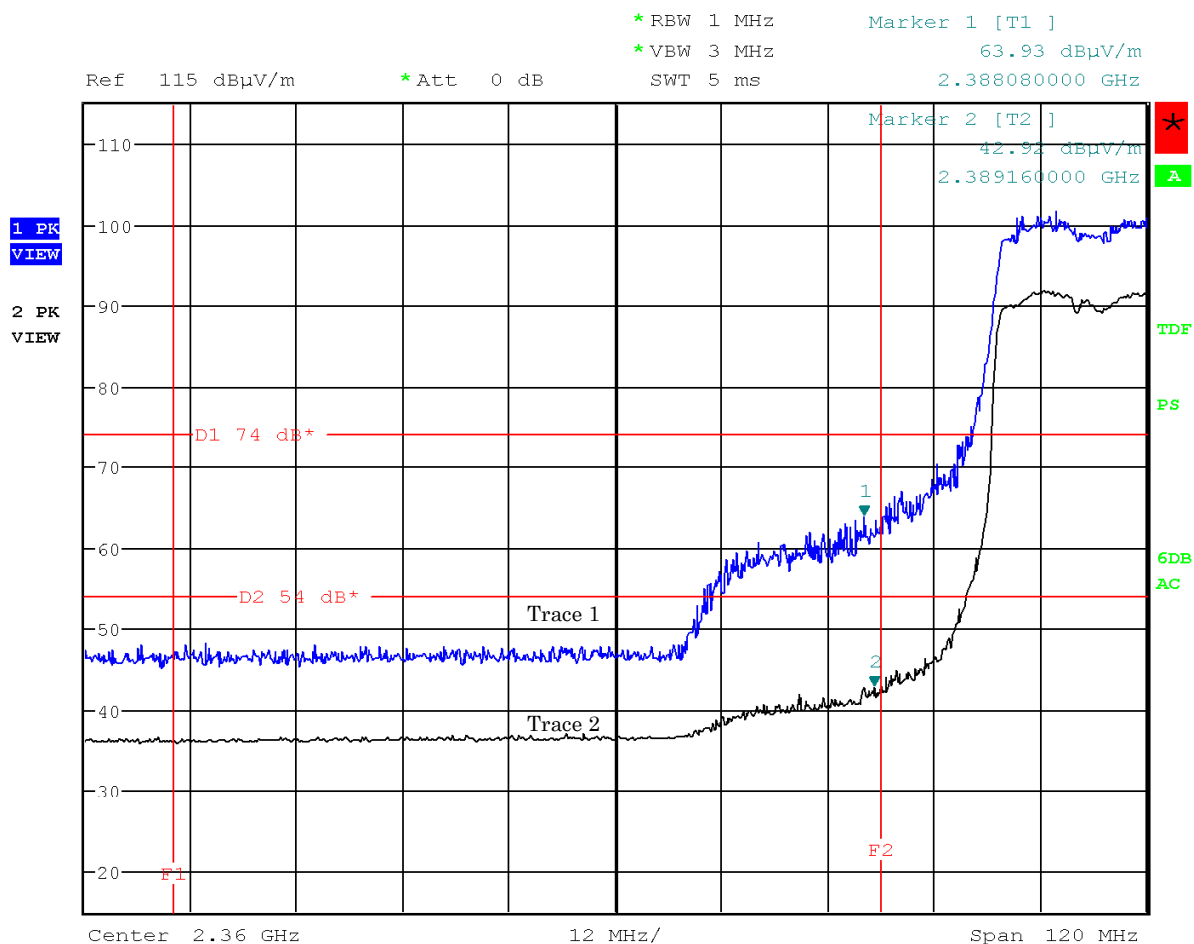

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (1ch: 2412 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

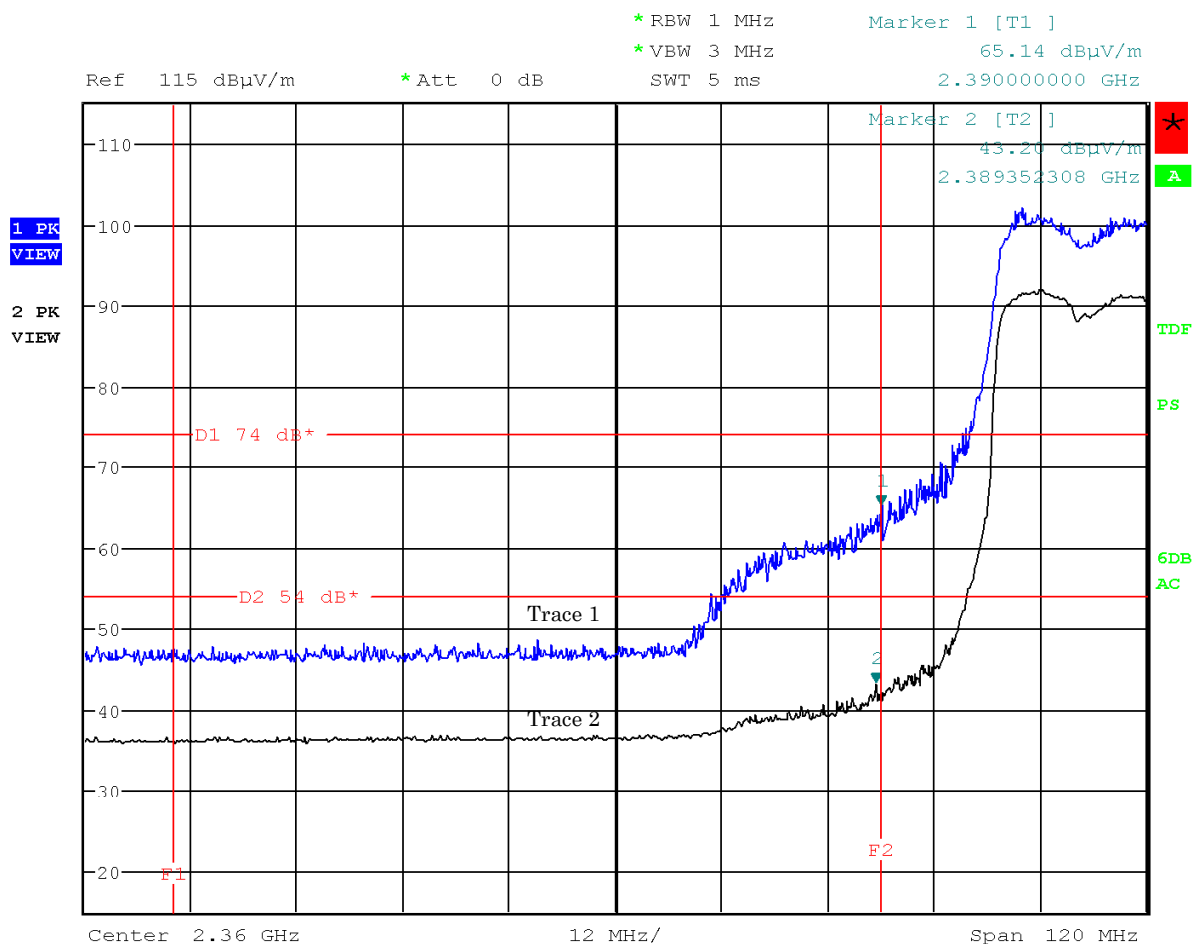

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Horizontal

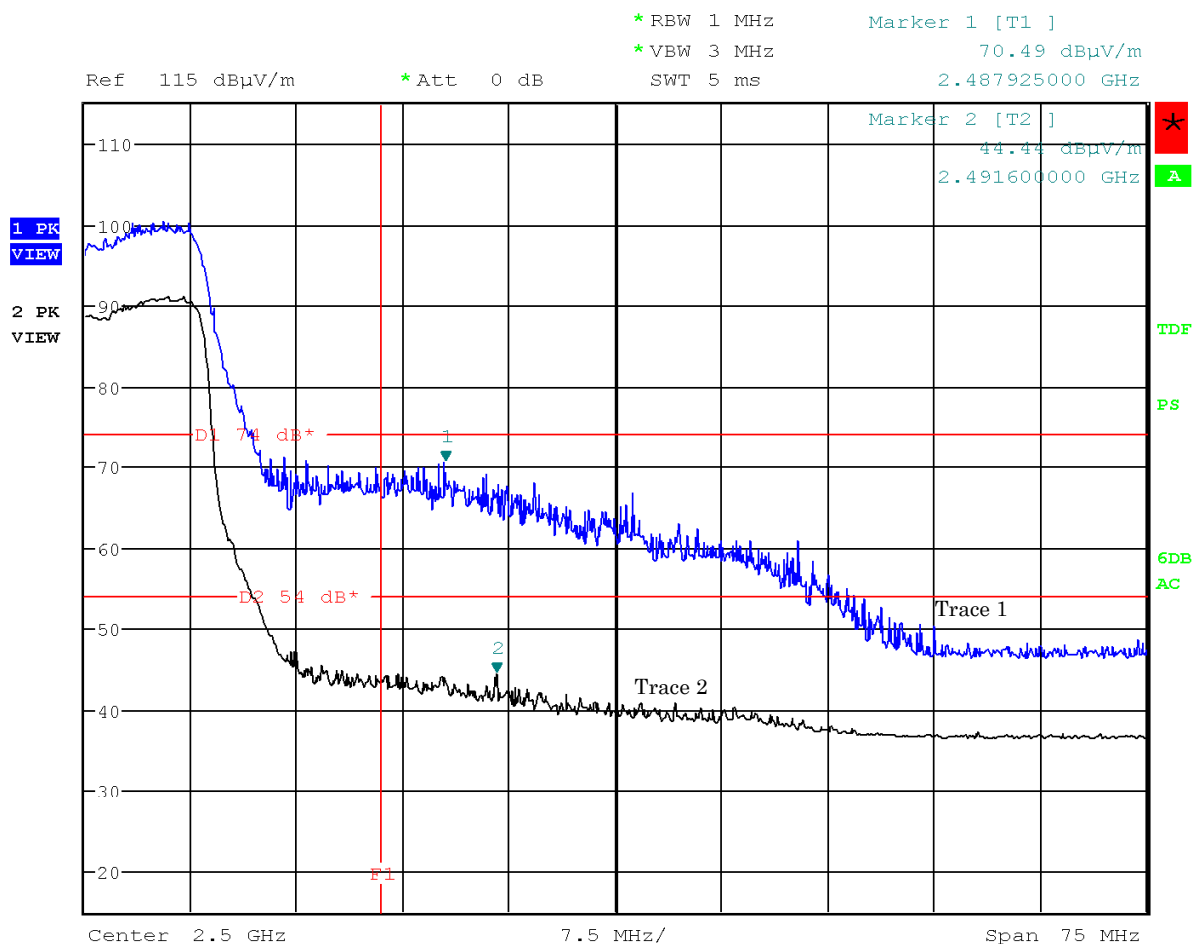

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 2TX: ANT0+ANT1 (11ch: 2462 MHz, (IEEE 802.11n))


Antenna Polarization : Vertical

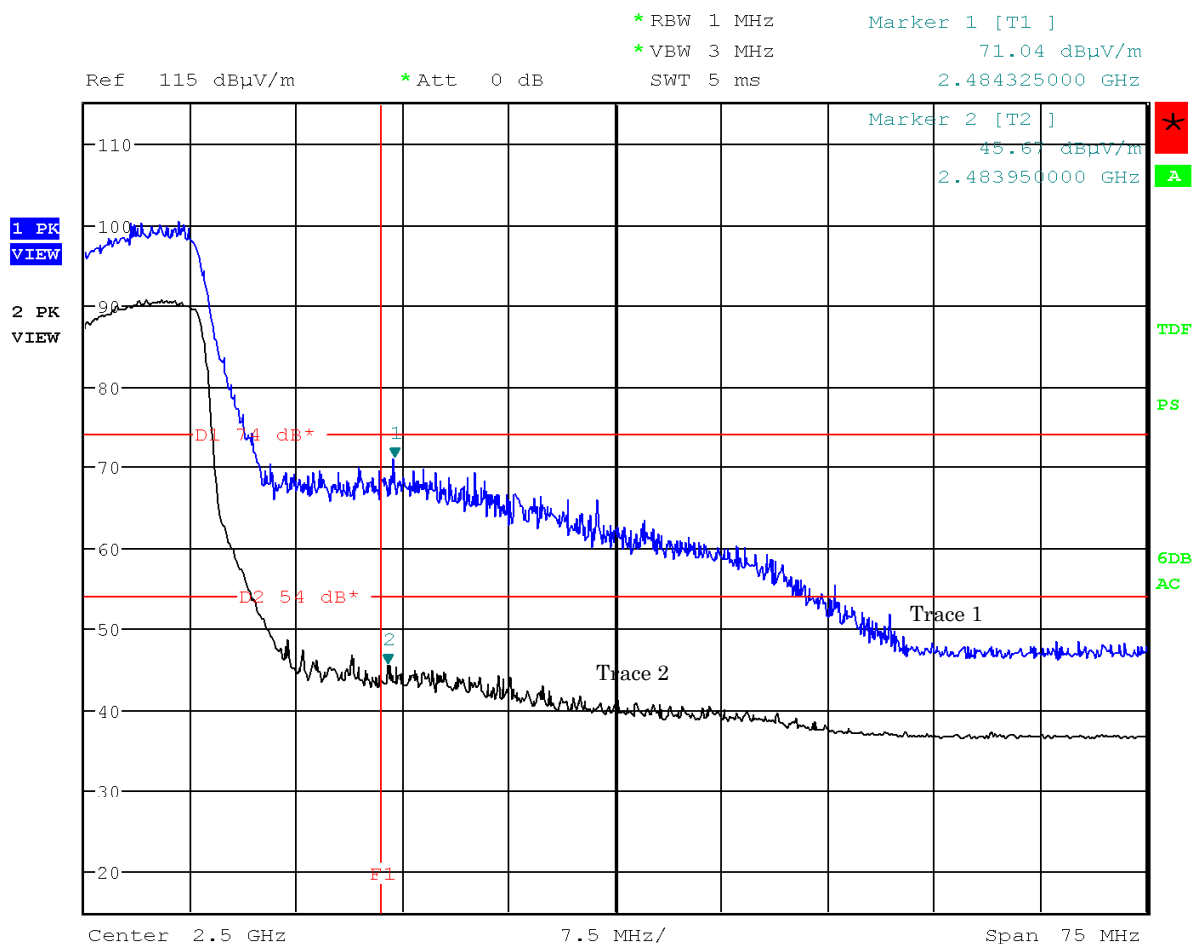

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Horizontal

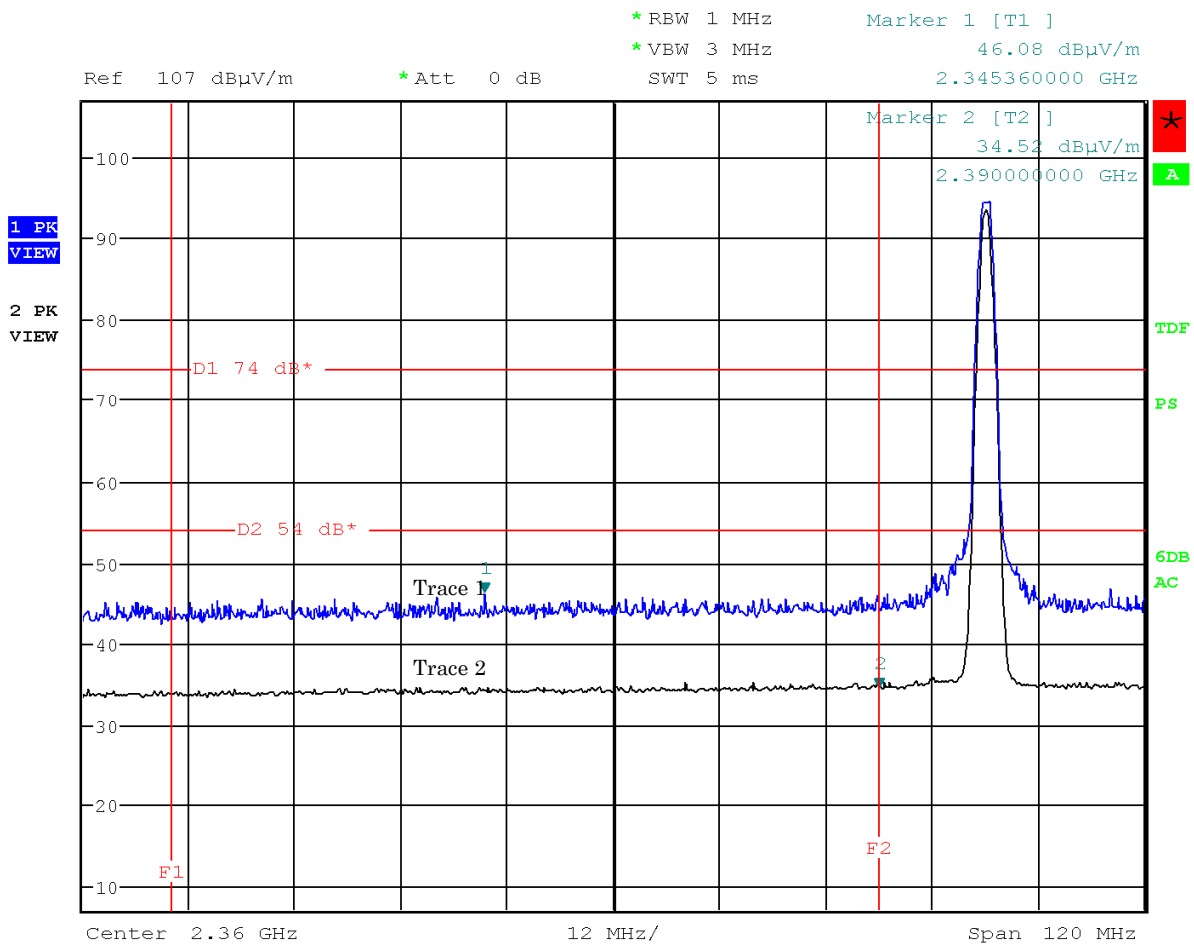

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (0ch: 2402 MHz)


Antenna Polarization : Vertical

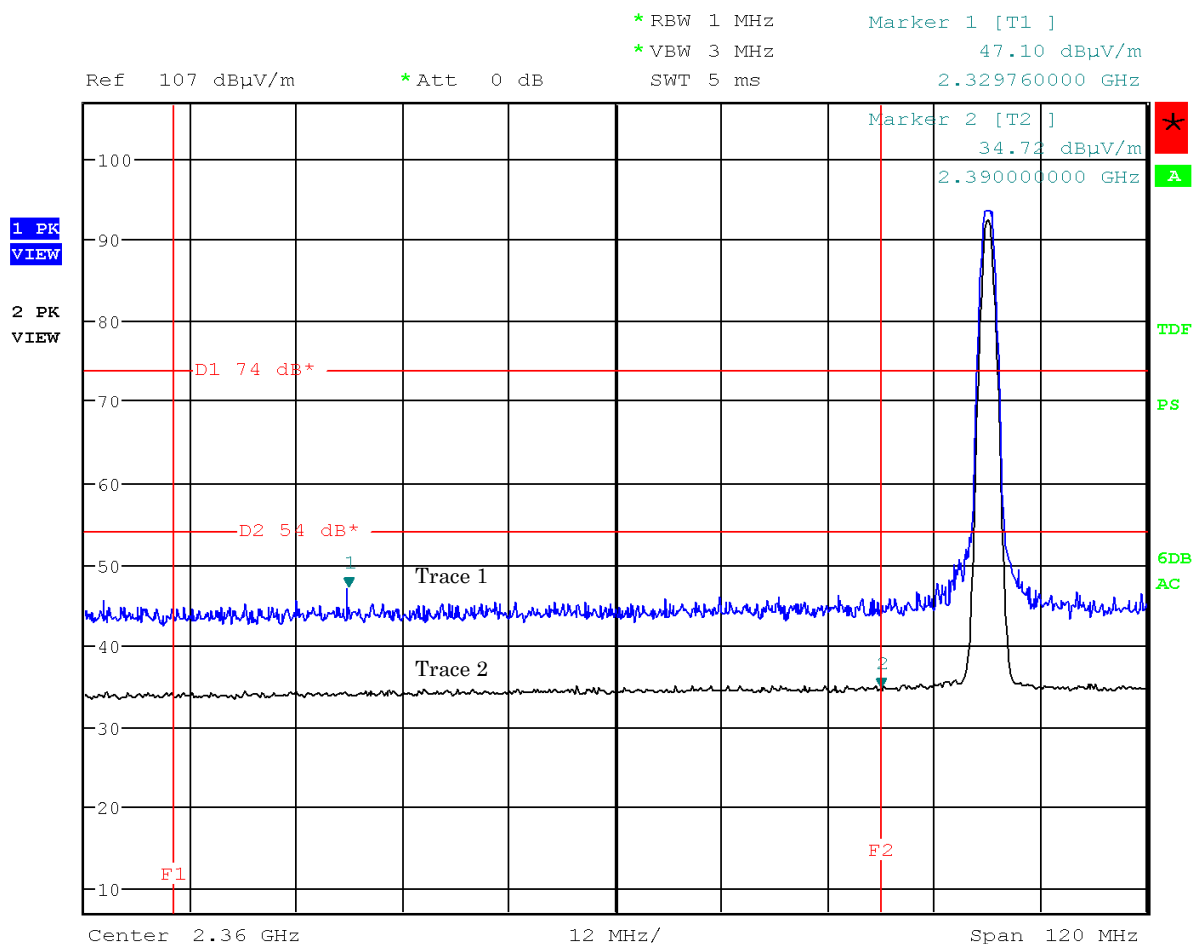

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)


Antenna Polarization : Horizontal

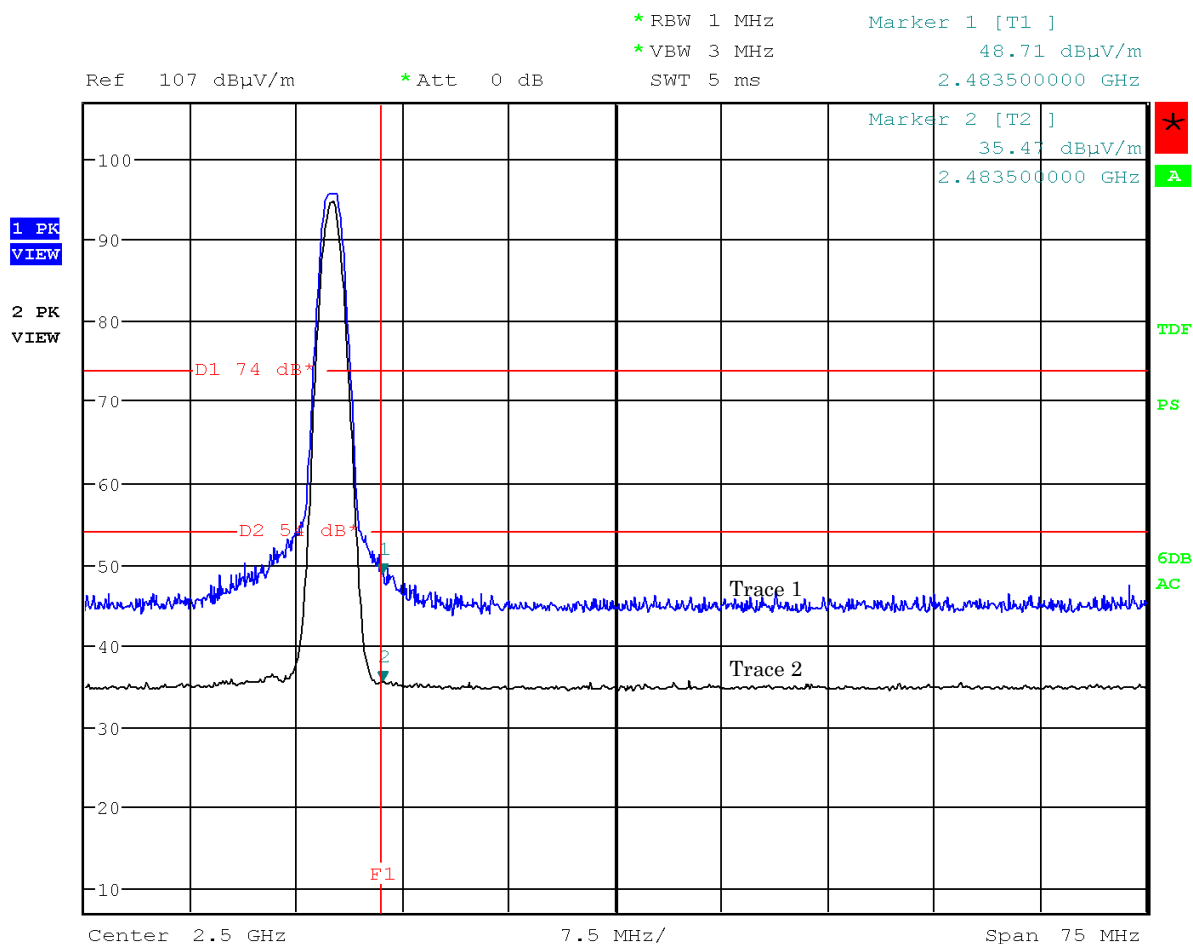

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : Bluetooth Low Energy, Hopping off (39ch: 2480 MHz)

Antenna Polarization : Vertical

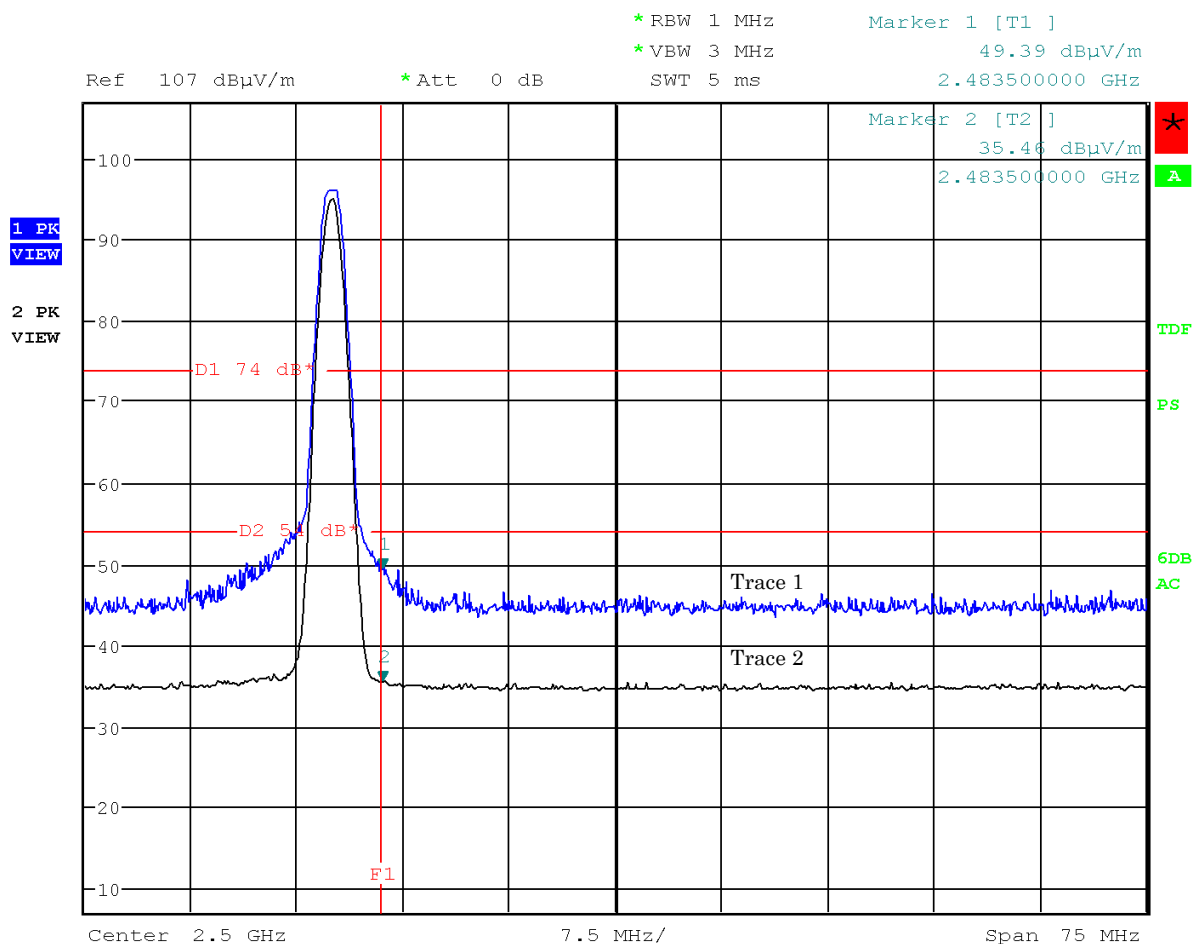

Note: The trace 1 is Peak . The trace 2 is Average.

7.9.4.2 Other Spurious Emission (9kHz – 30MHz)

Test Date : March 23, 2015

Temp.:20°C, Humi:34%

Mode of EUT : WLAN/Bluetooth LE

Results : No spurious emissions in the range 20dB below the limit.

7.9.4.3 Other Spurious Emission (30MHz – 1000MHz)


Mode of EUT : (WLAN) All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: March 23, 2015

Temp.: 20 °C, Humi: 34 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
45.64	12.8	-27.5	30.1	40.0	15.4	+24.6	-
403.35	16.4	-25.0	35.5	46.0	26.9	+19.1	-

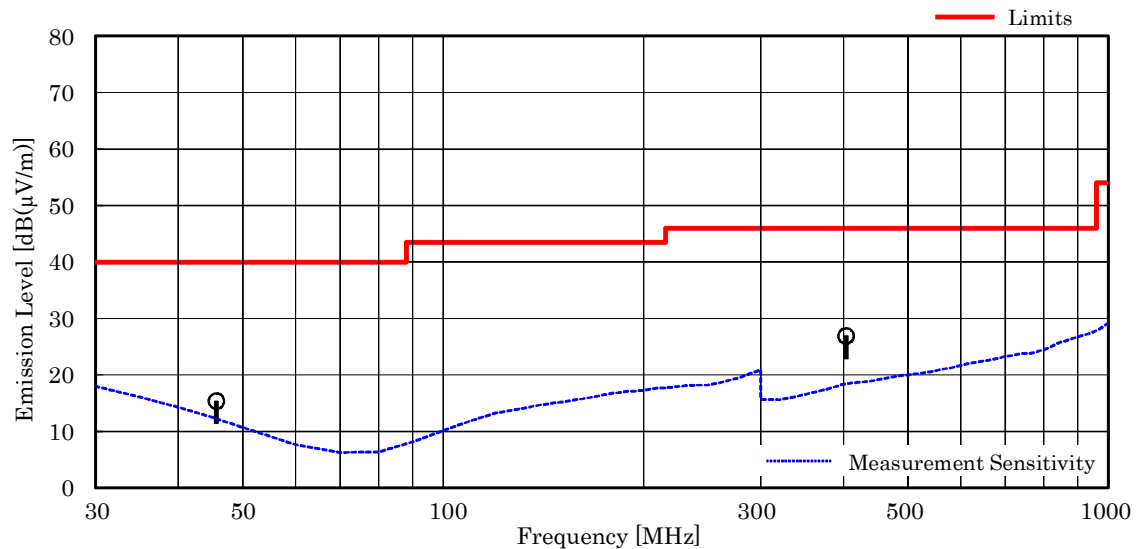

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 403.35 MHz, as the worst point shown on underline:
Antenna Factor + Coorection Factor + Meter Reading = 16.4 + (-25.0) + 35.5 = 26.9 dB(μV/m)
Antenna Height : 1.00 m, Turntable Angle : 138 °
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

Test Date: March 23, 2015

Temp.: 20 °C, Humi: 34 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
45.64	12.8	-27.5	40.9	40.0	26.2	+13.8	-
403.35	16.4	-25.0	29.1	46.0	20.5	+25.5	-

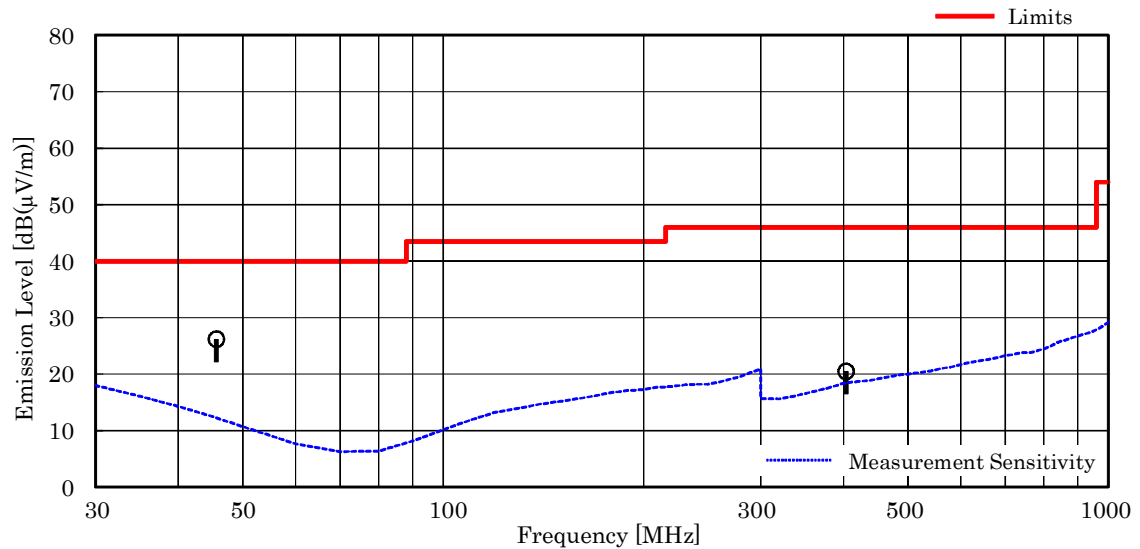

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 45.64 MHz, as the worst point shown on underline:


$$\text{Antenna Factor} + \text{Coorection Factor} + \text{Meter Reading} = 12.8 + (-27.5) + 40.9 = 26.2 \text{ dB}(\mu\text{V/m})$$
 Antenna Height : 1.00 m, Turntable Angle : 178 °
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

Mode of EUT : Bluetooth Low Energy

Test Date: March 23, 2015
Temp.: 20 °C, Humi: 34 %

Antenna pole : Horizontal

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
45.65	12.8	-27.5	29.2	40.0	14.5	+25.5	-
403.35	16.4	-25.0	35.6	46.0	27.0	+19.0	-

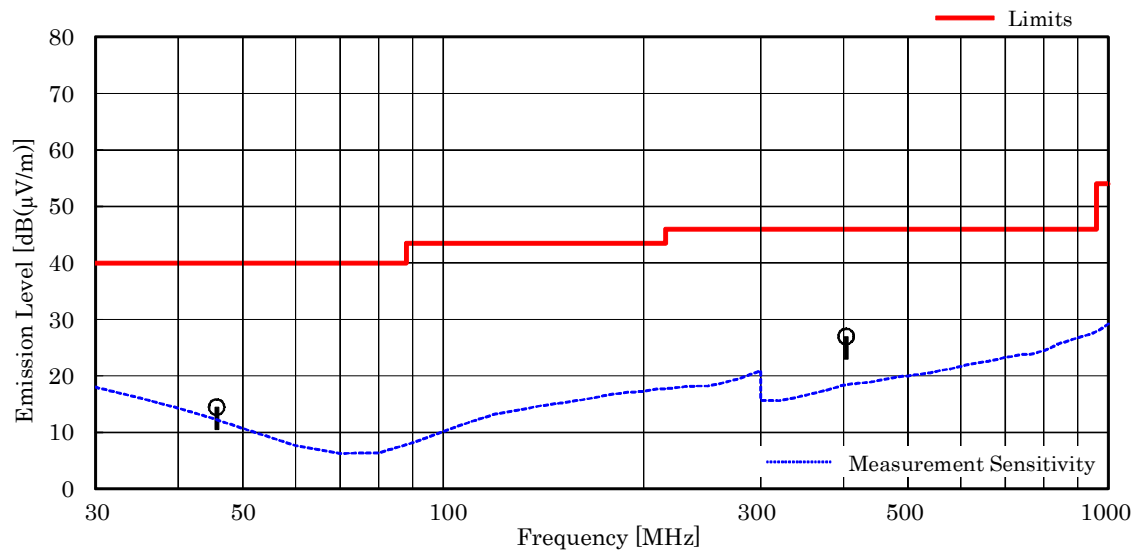

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 403.35 MHz, as the worst point shown on underline:
Antenna Factor + Coorection Factor + Meter Reading = 16.4 + (-25.0) + 35.6 = 27.0 dB(μV/m)
Antenna Height : 1.00 m, Turntable Angle : 195 °
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

Test Date: March 23, 2015

Temp.: 20 °C, Humi: 34 %

Antenna pole : Vertical

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]	Limits [dB(μV/m)]	Results [dB(μV/m)]	Margin [dB]	Remarks
45.65	12.8	-27.5	39.5	40.0	24.8	+15.2	-
403.35	16.4	-25.0	29.6	46.0	21.0	+25.0	-

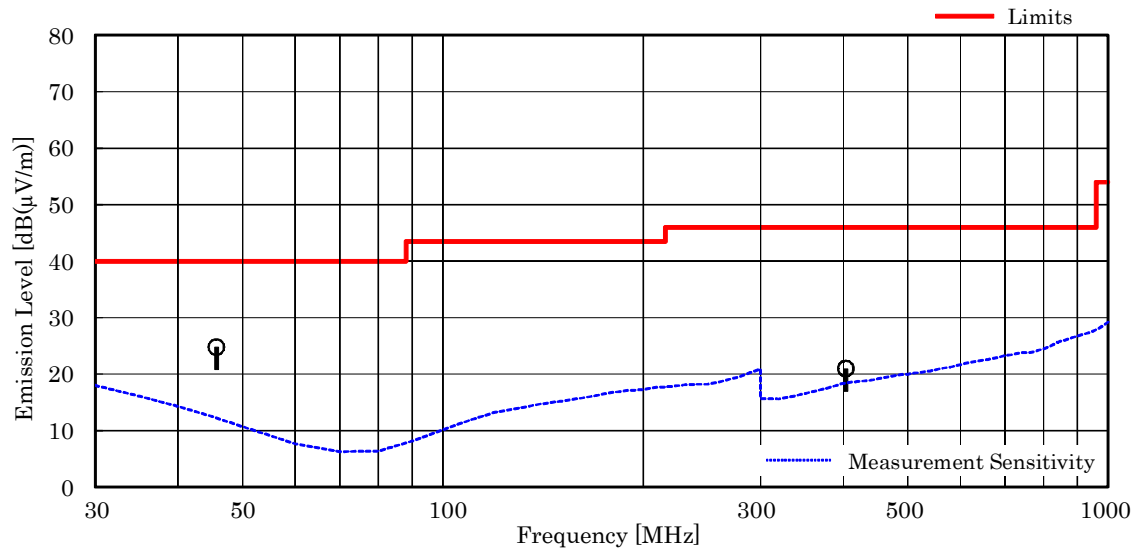

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The correction factor is composed of cable loss, pad attenuation and/or amplifier gain.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 45.65 MHz, as the worst point shown on underline:
 Antenna Factor + Coorection Factor + Meter Reading = 12.8 + (-27.5) + 39.5 = 24.8 dB(μV/m)
 Antenna Height : 1.00 m, Turntable Angle : 172 °
7. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

7.9.4.4 Other Spurious Emission (Above 1000MHz)

7.9.4.4.1 Mode of TX

7.9.4.4.1.1 IEEE802.11b

a) 1TX (ANT0)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx Low Ch												
4824.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.6	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19296.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19496.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

b) 2TX (ANT0+ANT1)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx Low Ch												
4824.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.6	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19296.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19496.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.1.2 IEEE802.11g

a) 1TX (ANT0)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.6	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19296.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19496.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

b) 2TX (ANT0+ANT1)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
[MHz]	[dB(1/m)]	[dB]										
Test condition : Tx Low Ch												
4824.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.6	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19296.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19496.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.1.3 IEEE802.11n

a) 1TX (ANT0)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.6	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19296.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19496.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

b) 2TX (ANT0+ANT1)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	[dB]	
Test condition : Tx Low Ch												
4824.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12060.0	33.6	-25.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.7	< 35.7	> +18.3	
19296.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX Middle Ch												
4874.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
7311.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12185.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19496.0	40.5	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.7	< 37.7	> +16.3	
Test condition : TX High Ch												
4924.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7386.0	29.8	-16.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.9	< 40.9	> +13.1	
12310.0	33.4	-26.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.8	< 34.8	> +19.2	
19696.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
22158.0	40.6	-43.3	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.3	< 37.3	> +16.7	

Calculated result at 7311.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.1.4 Bluetooth Low Energy

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency	Antenna Factor	Corr. Factor	Meter Readings [dB(μV)]				Limits		Results		Margin [dB]	Remarks
			Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]			
	[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	
Test condition : Tx Low Ch												
4804.0	27.3	-16.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.2	< 39.2	> +14.8	
12010.0	33.7	-25.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.9	< 35.9	> +18.1	
19216.0	40.5	-42.9	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX Middle Ch												
4880.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7320.0	29.8	-16.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.0	< 41.0	> +13.0	
12200.0	33.5	-26.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 45.2	< 35.2	> +18.8	
19520.0	40.4	-42.8	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.6	< 37.6	> +16.4	
Test condition : TX High Ch												
4960.0	27.3	-16.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.3	< 39.3	> +14.7	
7440.0	29.8	-17.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.8	< 40.8	> +13.2	
12400.0	33.5	-26.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 44.7	< 34.7	> +19.3	
19840.0	40.4	-43.0	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.4	< 37.4	> +16.6	
22320.0	40.6	-43.4	< 50.0	< 40.0	< 50.0	< 40.0	74.0	54.0	< 47.2	< 37.2	> +16.8	

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	29.8 dB(1/m)
Corr. Factor	=	-16.8 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<41.0 dB(μV/m)

Minimum Margin: 54.0 - <41.0 = >13.0 (dB)

NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak / AVE : Average

7.9.4.4.2 Mode of RX (WLAN)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
Test condition : RX Middle Ch												
2437.0	21.5	-18.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 40.7	< 30.7	> +23.3	
4874.0	27.3	-16.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.9	< 38.9	> +15.1	
7311.0	29.8	-17.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.7	< 40.7	> +13.3	

Calculated result at 4874.0 MHz, as the worst point shown on underline:

Antenna Factor	=	27.3 dB(1/m)
Corr. Factor	=	-16.4 dB
+) Meter Reading	=	<28.0 dB(μV)
Result	=	<38.9 dB(μV/m)

Minimum Margin: 54.0 - <38.9 => +13.3 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 7.5 GHz .
3. The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

7.9.4.4.3 Mode of RX (Bluetooth Low Energy)

Test Date: March 18, 2015

Temp.: 21 °C, Humi: 60 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
Test condition : RX Middle Ch												
2440.0	21.5	-18.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 40.7	< 30.7	> +23.3	
4880.0	27.3	-16.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 49.0	< 39.0	> +15.0	
7320.0	29.8	-17.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 50.7	< 40.7	> +13.3	

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor = 29.8 dB(1/m)

Corr. Factor = -17.1 dB

+) Meter Reading = <28.0 dB(μV)

Result = <40.7 dB(μV/m)

Minimum Margin: 54.0 - <40.7 =>13.3 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 7.5 GHz .
3. The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average