

Report No.: 31551685.004 Harris Part 90.doc

Page 1 of 89

Electromagnetic Compatibility Test Report

Prepared in accordance with

FCC Parts 2 and 90 (Subpart Y)

On

BROADBAND ETHERNET RADIO

RF-7800W

Harris RF Communications 221 Jefferson Ridge Parkway Lynchburg, VA 24501

Prepared by:

TUV Rheinland of North America, Inc.



Report No.: 31551685.004 Harris Part 90.doc

Page 2 of 89

(Client:	Harris RF Communications 221 Jefferson Ridge Parkwa Lynchburg, VA 24501	ny		43	William Pertner 434-455-9295 wpertner@harris.com		
Identification	n:]	BROADBAND ETHERNET	RADIO	Serial No.:		A00451		
Test iten	n:	RF-7800W		Do	ate tested:	7/9/2015	5	
Testing location	n:	TUV Rheinland of North Ame 710 Resende Road Building 1 Webster, NY 14580 U.S.A.		Tel: (585) 645-0125			25	
Test specification		Emissions: FCC Part 90, FCC Parts 90.210 FCC Parts 90.210 FCC Part 90.1213 and Section 2.1049, FCC Part 90.1215, FCC Part 90.1215, FCC Part 90.1217, Part 1.1307 and 1.1310,						
Test Resu	alt T	The above product was foun	d to be C	Compli	ant to the	above test s	standard(s)	
tested by: Randal	ll E Mas	sline	reviewed by: Cecil Gittens					
10 September 2015 Signature			10 Se	eptember	2015	Signature		
Other Aspect	s:			None		<i>~-</i> 3		
Fail, No		t, Complies = passed , Does Not Comply = failed le						
F©	lac	MRA ACCREDITED		lustry nada	,	VCCI	BSMI	
US5253	Т	esting Cert.# 3331.08	482	B-1	. A	A-0203	SL2-IN-E-050R	

Report No.:

31551685.004 Harris Part 90.doc

Page 3 of 89

TABLE OF CONTENTS

1 6	GENERAL INFORMATION	5
1.1 1.2 1.3	Purpose	5 6
2.1 2.2 2.3	MEASUREMENT UNCERTAINTY EMISSIONS	8
3 P	PRODUCT INFORMATION	11
3.1 3.2 3.3 3.4 3.5	EQUIPMENT MODIFICATIONS	11 12 16
4 P	POWER LIMITS	30
4.1 4.2 4.3 4.4	PEAK POWER SPECTRAL DENSITY	39 49
5 (CONDUCTED EMISSION LIMITS FCC 90.210	61
6 R	RF EXPOSURE	83
	EXPOSURE REQUIREMENTS – FCC PARTS 90 1217 1 1307 AND 1 1310	

Manufacturer's statement - attestation

The manufacturer; Harris Corporation, as the responsible party for the equipment tested, hereby affirms:

- a) That they have reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

William H. Pertner	William H Pecter
Printed name of official	Signature of official
221 Jefferson Ridge Parkway Lynchburg, VA 24501	07/22/2015
Address	Date
434-455-9295	william.pertner@harris.com
Telephone number	Email address of official



Report No.: 31551685.004 Harris Part 90.doc

Page 5 of 89

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 90 and Part 2 based on the results of testing performed on 7/9/2015 on the BROADBAND ETHERNET RADIO, RF-7800W Model No. RF-7800W, manufactured by Harris RF Communications. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this RF-7800W are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.



einland FCCID: AQZ-RF-7800W-G2

Report No.: 31551685.004 Harris Part 90.doc

Page 6 of 89

1.	3 Sum	ma	ary of Test Re	esults						
Harris RF Com				Tel 434-455-9295		5	Contact	William Pertner		
Applicant	Lynchburg		idge Parkway . 24501		Fax	434-455-685	1	e-mail	wpertner@ha	rris.com
Broadband Radio	Ethernet		OADBAND .DIO	ETHERNET	RF-78	00W:	RF-7	7800W		
Serial Num	ber	A0	0451		Test V	oltage/Freq.	Powe	er over Ether	net	
Test Date C	ompleted:	7/9	/2015		Test E	ngineer	Ran	dall E Masl	ine	
Star	ndards		Descript	ion		Severity Leve	l or L	imit	Criteria	Test Result
FCC Part 90 Standard			Regulations G licensing and frequencies in the MHz ba	d use of e 4940-4990	See called out parts below			See Below	Complies	
FCC Part 90	.1215				Below the applicable limits		Below Limit	Complies		
FCC Parts 9	0.210		Spurious and F Emissio (EUT in Transr	ons	Below	the applicable	limits		Below Limit	Complies
FCC Parts 9	0.210		Conducted Emi AC Mai		EUT is	operated by Po	ЭE		Below Limit	Complies
FCC Part 90	.1215		Power Lin	mits	Shall n	ot exceed 1.0 V	Vatt		Below Limit	Complies
FCC Part 90 Section 2.10			99% Occupied I	Bandwidth	99% B	W			Within Limit	Complies
FCC Part 90	.1215		Peak Power S Denesit	•	≤ 21 dBm in any 1 MHz		MHz		Below Limit	Complies
FCC Part 90 2.1055	.213 and Par	t	Freqency St	tability					Below Limit	Complies
FCC Parts 90 1.1307 and 1			RF Expos	sure	SAR o	r MPE Require	ments		Below Limit	Complies (without testing)



Report No.: 31551685.004 Harris Part 90.doc Page 7 of 89

Laboratory Information

2.1 **Accreditations & Endorsements**

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at, 710 Resende Road, Building 199, Webster, NY 14580 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90575). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 ILAC/A2LA

This is a program which is administered under the auspices of A2LA. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Certificate Number: 3331.08). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 VCCI

VCCI Accredited test lab. Registration numbers A-0203

2.1.4 Industry Canada

(Registration No.: 482B-1) The 10M SEMI-ANECHOIC CHAMBER has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2009.

2.1.5 **BSMI**

Registration No.: SL2-IN-E-050R. The BSMI accreditation was obtained by NIST MRA with the BSMI.

2.1.6 Korea

Recognized by Radio Research Agency as an accredited Conformity Assessment Body (CAB) under the terms of Phase I of the APEC TEL.



Report No.:

31551685.004 Harris Part 90.doc

Page 8 of 89

2.1.7 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

Field Strength
$$(dB\mu V/m) = RAW - AMP + CBL + ACF$$

Where: $RAW = Measured level before correction (dB<math>\mu V$)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu V/m = 10^{\frac{\textit{dB}\mu V \, / \, \textit{m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor-Amplifier Gain+Cable loss=Radiated Emissions (dBµV/m)

$$25 \; dB\mu V/m + 17.5 \; dB - 20 \; dB + 1.0 \; dB = 23.5 \; dB\mu V/m$$

2.2 Measurement Uncertainty Emissions

Per CISPR 16-4-2	Ulab	Ucispr								
Radiated Disturbance @ 10m										
30 MHz – 1,000 MHz	4.57 dB	5.2 dB								
Radiated Disturbance @ 3m										
1.0 GHz – 6.0 GHz	5.08 dB	5.2 dB								
6.0 GHz – 18.0 GHz	5.16 dB	5.5 dB								
Conducted Disturbance @ M	ains Terminals									
150 kHz – 30 MHz	2.62 dB	3.6 dB								
Disturbance Power										
30 MHz – 300 MHz	3.88 dB	4.5 dB								



Report No.: 31551685.004 Harris Part 90.doc

Page 9 of 89

Measurement Uncertainty Immunity

	I
The estimated combined standard uncertainty for ESD immunity measurements is $\pm 2.98\%$.	Per EN61000-4-2
The estimated combined standard uncertainty for radiated immunity measurements is $\pm 2.0 dB$.	Per EN61000-4-3
The estimated combined standard uncertainty for EFT fast transient immunity measurements is \pm 5.0%.	Per EN61000-4-6
The estimated combined standard uncertainty for surge immunity measurements is \pm 5.0%.	Per EN61000-4-5
The estimated combined standard uncertainty for conducted immunity measurements is $\pm 2.0 dB$.	Per EN61000-4-6
The estimated combined standard uncertainty for power frequency magnetic field immunity measurements is \pm 2.57%.	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for voltage variation and interruption measurements is \pm 2.48%.	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements is $\pm4.57~dB$	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements from 1 GHz to 6 GHz is \pm 4.57dB	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements from 6GHz to 18GHz is $\pm4.57\text{dB}$	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for conducted emissions measurements is \pm 2.62dB.	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for harmonic current and flicker measurements is \pm 11.15%.	Per CISPR16-4-2 Method

Expanded measurement uncertainty numbers are shown in the tables above. Compliance criteria are not based on measurement uncertainty.



Report No.: 31551685.004 Harris Part 90.doc

Page 10 of 89

2.3 Measurement Equipment Used

Equipment	Manufacturer	Model #	Ref.	Serial #	Last Cal dd/mm/yy	Next Cal dd/mm/yy	Test					
	Radiated Emissions											
Analyzer w RF Filter Section 85460A	HP	8546A		3325A00134	12-Aug-14	12-Aug-15	RE					
Multimeter	Fluke	83	C437	48162892	12-Aug-14	12-Aug-15	RE					
BiLog	Chase	CBL6111	C017	1169	22 Aug 13	22 Aug 15	RE					
Receiver (20Hz-40GHz)	Rohde & Schwarz	ESI(B) 40		100274	15-Aug-14	15-Aug-15	RE					
Horn(1-18 GHz)	ETS	3117			1-16-14	1-16-16	RE					
Horn(18-26.5 GHz)	ETS	3160-09		1275	1-16-14	1-16-16	RE					
Horn(26.5-40 GHz)	ETS	3160-10		1180	1-16-14	1-16-16	RE					
		Conducted	d Emissic	ons								
LISN	Schwarzbeck	8126	C109	189	12-Aug-14	12-Aug-15	CE					
Analyzer w RF Filter Section 85460A	HP	8546A		3325A00134	12-Aug-14	12-Aug-15	CE					
Multimeter	Fluke	87	C445	59890224	12-Aug-14	12-Aug-15	CE					
	General Laboratory Equipment											
Multimeter	Fluke	87	C405	49050672	12-Aug-14	12-Aug-15						
Multimeter	Fluke	8062A	C452	4715199	12-Aug-14	12-Aug-15						
Pressure/Temperature/RH	Extech	SD700	C480	Q668876	12-Aug-14	12-Aug-15						



Report No.: 31551685.004 Harris Part 90.doc Page 11 of 89

3 Product Information

3.1 Product

Broadband Ethernet Radio RF-7800W

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.



Report No.: 31551685.004 Harris Part 90.doc

Page 12 of 89

3.3 Transmitter Spurious/Harmonic Radiated Emissions Limits @ 90.210(M)

3.3.1 Over View of Test

Results	Complies (as tested	l per this	Date	7/11/2015				
Standard	FCC Part 90.210 M	Mask						
Product	RF-7800W				Serial#	A004	-51	
Test Set-up		Tested in a 10m Semi-Anechoic Chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table.						conductive
EUT Powered By	Power over Ethernet	Temp	76 °F Humidity 36% Pressure 1007 mbar					
Perf. Criteria	(Below Limit)		Perf. Verification Readings Under Limit					
Mod. to EUT	None		Test Pe	rfoi	rmed By	Rand	all E Masline	· ·

3.3.2 Test Procedure

- (a) The power of emission outside any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or 55 + 10 log (P) dB, whichever is the lesser attenuation.
- (b) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

3.3.3 Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 7, § 7.1 of this report and its value in dBc is calculated as follows:

- 1. If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
- 2. If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
- 3. Lowest ERP of the carrier = EIRP -2.15 dB = Pc + G 2.15 dB = xxx dBm (conducted) + 0 dBi 2.15 dB
- 4. Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:



TUVRheinland® FCCID: AQZ-RF-7800W-G2

Report No.: 31551685.004 Harris Part 90.doc

Page 13 of 89

3.3.4 Deviations

There were no deviations from the test methodology listed in the test plan for the Transmitter Spurious/Harmonic radiated emission test.

3.3.5 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

3.3.5.1 Near Lowest Frequency (4942.5 MHz)

Fundamental Frequency: 4942.5 MHz

Test Frequency Range: 30 MHz – 40 GHz

All emissions are more than 20 dB below the limit.

3.3.5.2 Near Middle Frequency (4965 MHz)

Fundamental Frequency: 4965 MHz

Test Frequency Range: 30 MHz – 40 GHz

All emissions are more than 20 dB below the limit.

3.3.5.3 Near Highest Frequency (4985 MHz)

Fundamental Frequency: 4985

Test Frequency Range: 30 MHz – 40 GHz

All emissions are more than 20 dB below the limit.



Report No.: 31551685.004 Harris Part 90.doc Page 14 of 89

MEASURING THE EIRP OF SPURIOUS/HARMONIC EMISSIONS USING

SUBSTITUTION METHOD:

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency: equal to the signal source

Resolution BW: 10 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (c) Select the frequency and E-field levels obtained in the Section 7.2.1 for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
 - ♦ DIPOLE antenna for frequency from 30-1000 MHz or
 - ♦ HORN antenna for frequency above 1 GHz }.
- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna:
 - ♦ DIPOLE antenna for frequency from 30-1000 MHz or
 - ♦ HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360o about a vertical axis until a higher maximum signal was received.
- (1) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.



TUVRheinland® FCCID: AQZ-RF-7800W-G2

Report No.: 31551685.004 Harris Part 90.doc

Page 15 of 89

(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the

transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$

$$ERP = EIRP - 2.15 dB$$

Total Correction factor in EMI Receiver #2 = L2 - L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- (p) Repeat step (d) to (o) for different test frequency
- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.



Report No.: 31551685.004 Harris Part 90.doc Page 16 of 89

3.4 Emission Mask 90.210(M)

3.4.1 Over View of Test

Results	Complies (as tested	l per this	Date	6/24/2015				
Standard	FCC Part 90.210 M	Mask						
Product	RF-7800W				Serial#	A004	51	
Test Set-up		Γested at a 10m O.A.T.S., placed on a 1.0m x 1.5m non-conductive table 80cm above he ground plane on a turn-table.						80cm above
EUT Powered By	Power over Ethernet	Temp	76 °F Humidity 36% Pressure 1007 mbar					
Perf. Criteria	(Below Limit)		Perf. Verification Readings Under Limit					
Mod. to EUT	None		Test Pe	rfoi	rmed By	Rand	all E Masline	:

3.4.2 Test Procedure

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (m) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating in the frequency bands governed under this part.

- m) Emission Mask M. For high power transmitters (greater that 20 dBm) operating in the 4940-4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:
- (1) On any frequency removed from the assigned frequency between 0-45% of the authorized bandwidth (BW): 0 dB.
- (2) On any frequency removed from the assigned frequency between 45-50% of the authorized bandwidth: $568 \log (\% \text{ of } (BW)/45) dB$.
- (3) On any frequency removed from the assigned frequency between 50-55% of the authorized bandwidth: 26 + 145 log (% of BW/50) dB.
- (4) On any frequency removed from the assigned frequency between 55-100% of the authorized bandwidth: 32 + 31 log (% of (BW)/55) dB.
- (5) On any frequency removed from the assigned frequency between 100-150% of the authorized bandwidth: $40 + 57 \log (\% \text{ of (BW)/100}) \text{ dB}$.
- (6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P) dB$, whichever is the lesser attenuation.



Report No.:

31551685.004 Harris Part 90.doc

Page 17 of 89

(7) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth

3.4.3 Method of Measurements

The Emission masks are measured using EMI receiver (spectrum analyzer) with RBW = 1% of 99% OBW, VBW >= RBW.

3.4.4 Deviations

There were no deviations from the test methodology listed in the test plan for the emission mask M test.

3.4.5 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.



Report No.: 31551685.004 Harris Part 90.doc

Page 18 of 89

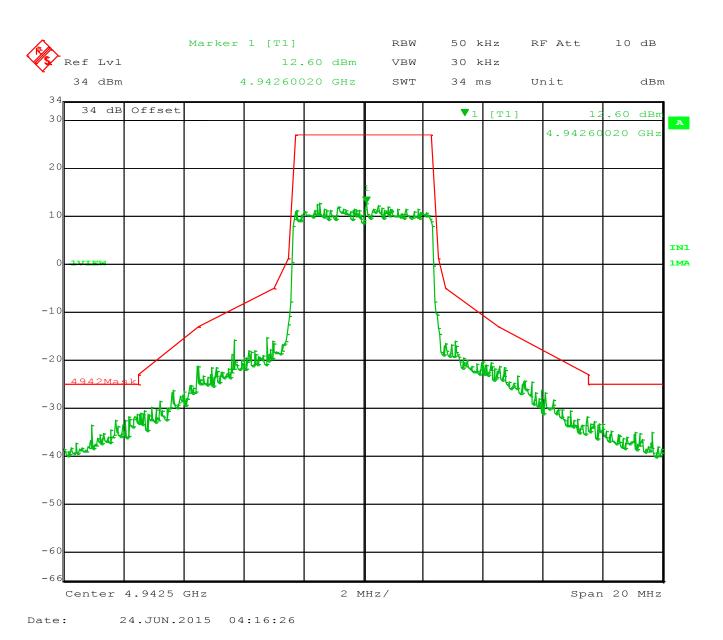


Figure 1 – Center Frequency 4942.5 MHz - 5 MHz Channel Spacing



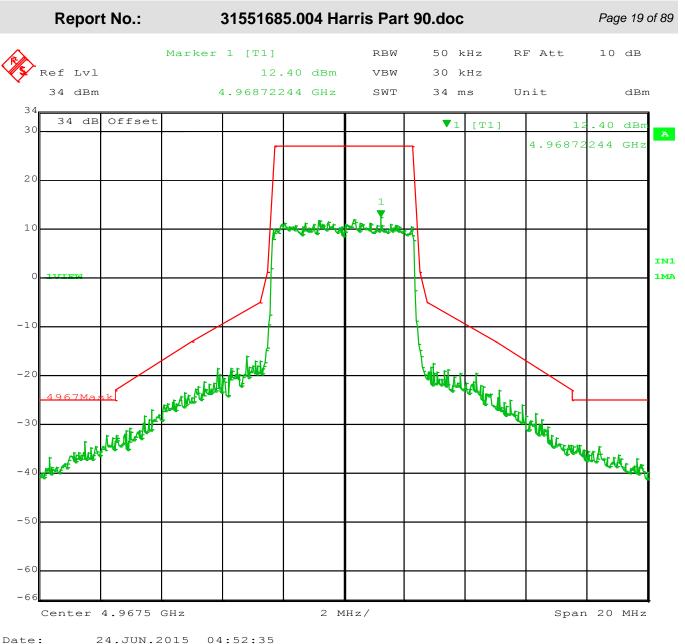


Figure 2 – Center Frequency 4967.5 MHz - 5 MHz Channel Spacing



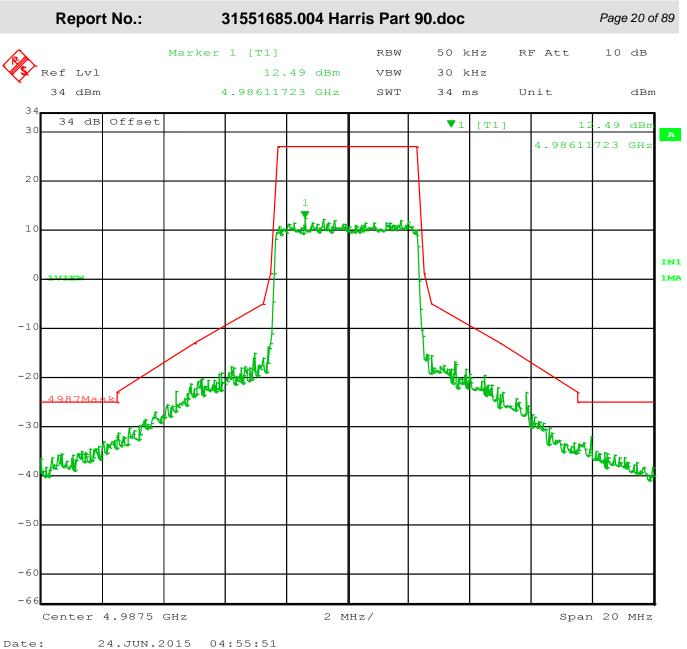


Figure 3 – Center Frequency 4987.5 MHz - 5 MHz Channel Spacing



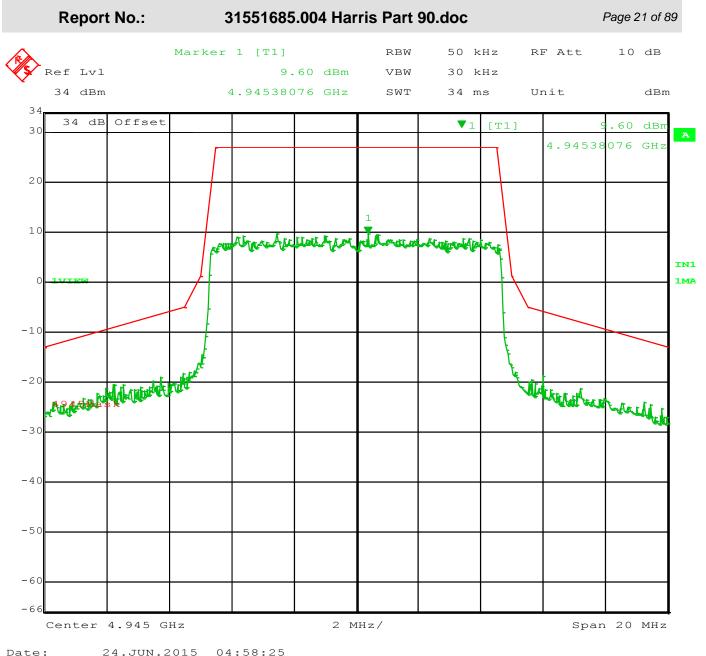


Figure 4 - Center Frequency 4945 MHz - 10 MHz Channel Spacing

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Date:



Rheinland FCCID: AQZ-RF-7800W-G2

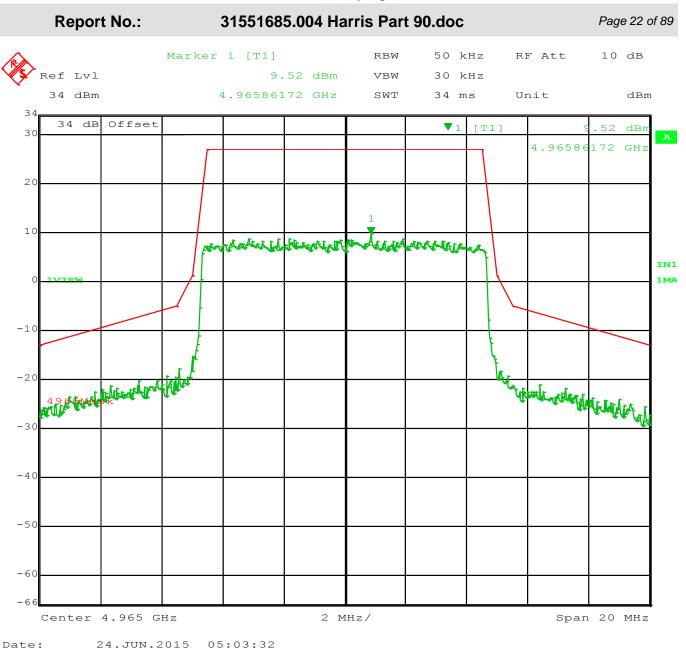


Figure 5 – Center Frequency 4965 MHz - 10 MHz Channel Spacing



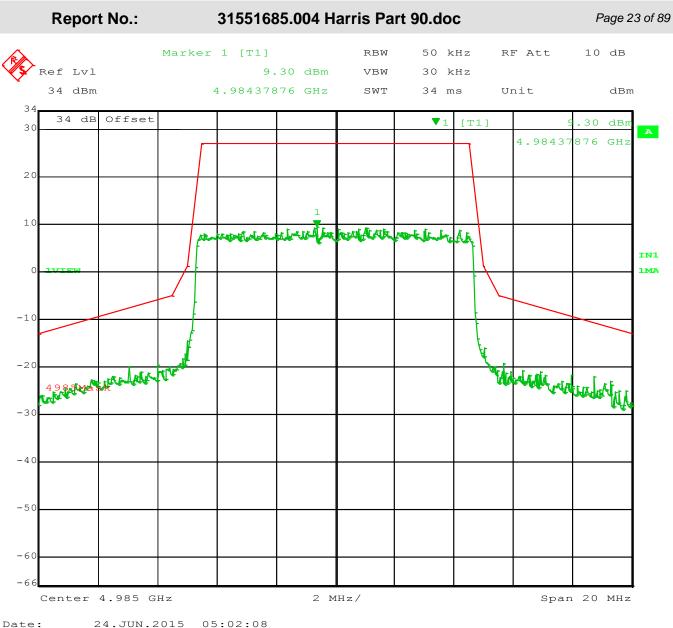


Figure 6 - Center Frequency 4985 MHz - 10 MHz Channel Spacing



heinland FCCID: AQZ-RF-7800W-G2

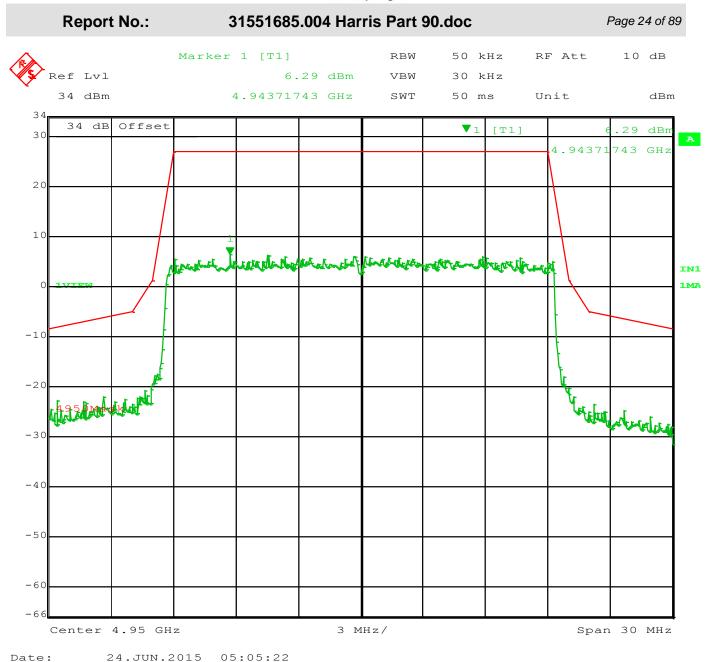


Figure 7 - Center Frequency 4950 MHz - 20 MHz Channel Spacing



einland FCCID: AQZ-RF-7800W-G2

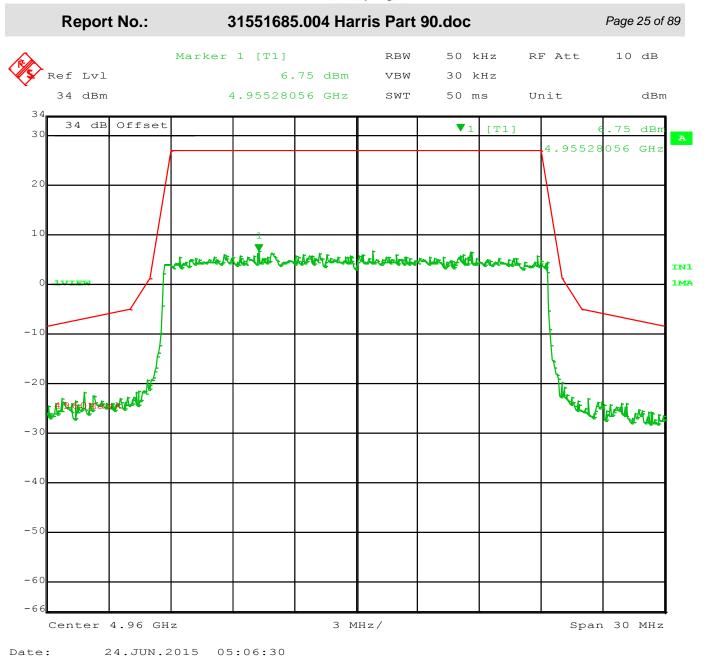


Figure 8 - Center Frequency 4960 MHz - 20 MHz Channel Spacing



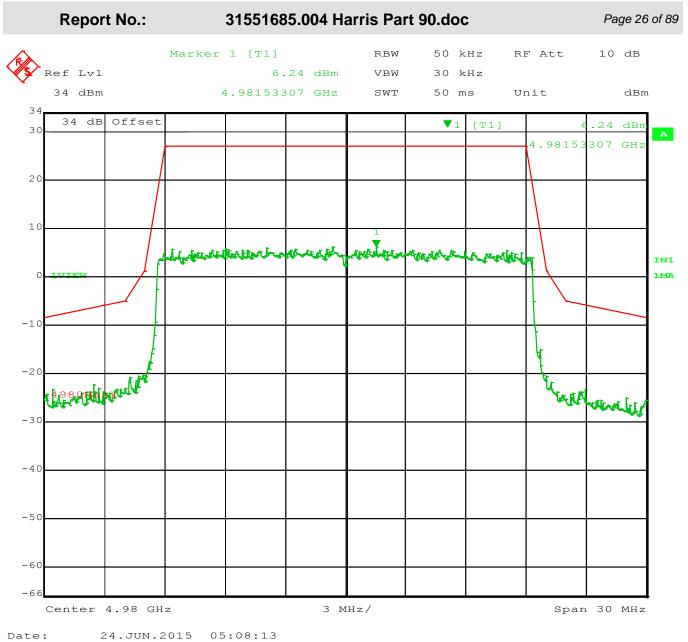


Figure 9 – Center Frequency 4980 MHz - 20 MHz Channel Spacing



Report No.: 31551685.004 Harris Part 90.doc

Page 27 of 89

3.5 Conducted Emissions on AC Mains

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

3.5.1 Over View of Test

Results	Complies (as teste	d per this	Date	7/2/2015	5			
Standard	FCC Parts 90.210							
Product	RF-7800W			Se	rial#	A004	51	
Test Set-up	Tested in 10m Semi details	Tested in 10m Semi- Anechoic Chamber. EUT placed on table, see test plans for details						
EUT Powered By	120VAC/60Hz	Temp	23° C	Hun	nidity	25%	Pressure	1011 mbar
Frequency Range	150 kHz – 30 MHz							
Perf. Criteria	(Below Limit) Perf. Verification Readings Under Limit for L1 & Neutral							L1 & Neutral
Mod. to EUT	None	Test 1	Performe	d By	Randa	ıll E Mas	sline	

3.5.2 Test Procedure

This device is powered by POE (Power over Ethernet), therefore per FCC Part 15.207(c) this test is required.

3.5.3 Final Test

Since the EUT is a powered via POE (Power over Ethernet). Product Complies.




Report No.: 31551685.004 Harris Part 90.doc

Page 28 of 89

NOTES:

Conducted Emissions @ 120V/60Hz

Neutral

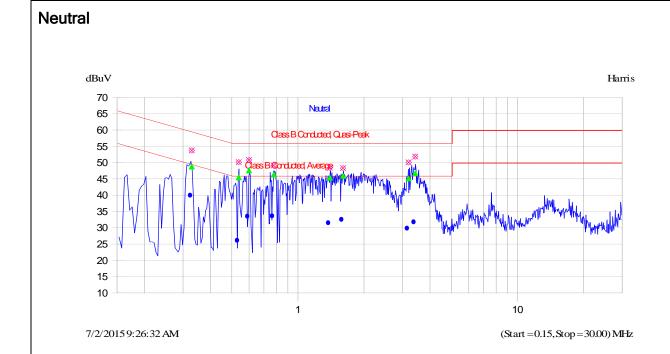

Frequency Peak QP MHz dBuV dBu		Avg dBuV	Delta Avg-Avg Limit dB	Transducer Correction dB	Cable Correction dB
0.326 53.9 48.9 0.533 50.3 45.6	6 -10.4		-20.0	0.0	10.3
	7 -8.3 5 -9.5 5 -10.5	33.5	-12.6 -12.5 -14.6	0.0 0.0 0.0	10.3 10.3 10.4
1.592 48.4 46.1 3.166 50.2 45.3 3.393 52.0 46.9	3 -10.7	29.7	-13.5 -16.3 -14.3	0.1 0.1 0.1	10.4 10.6 10.6




Report No.: 31551685.004 Harris Part 90.doc

Page 29 of 89

NOTES:

Conducted Emissions @ 120V/60Hz

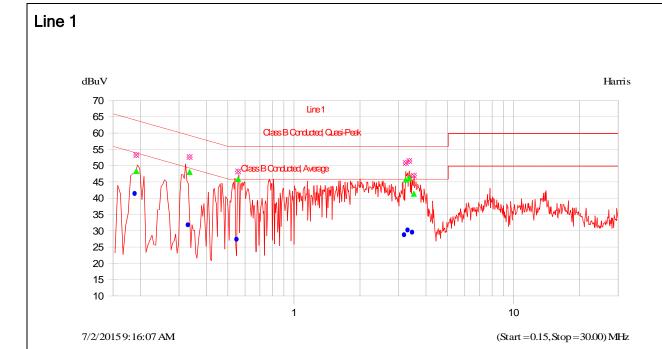

Frequency MHz	Peak dBuV		Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit	Transducer Correction dB	Cable Correction dB
0.190	53.4	48.4	-15.6	41.3	-12.7	0.0	10.2
0.332	52.8	48.2	-11.2	31.7	-17.7	0.0	10.3
0.552	48.3	46.0	-10.0	27.3	-18.7	0.0	10.3
3.204	50.9	45.8	-10.2	28.7	-17.3	0.1	10.6
3.325	51.6	46.3	-9.7	30.1	-15.9	0.1	10.6
3.488	47.0	41.5	-14.5	29.4	-16.6	0.1	10.6



Report No.: 31551685.004 Harris Part 90.doc

Page 30 of 89

4 Power Limits

For conducted tests, the emissions were measured at the antenna port.

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSP-100 Issue 9. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

4.1 Conducted Output Power, FCC 90.1215

The transmitting power of stations operating in the 4940–4990 MHz band must not exceed the maximum limits in this section. (a) The peak transmit power should not exceed:

Channel bandwidth (MHz)	Low power peak trans- mitter power (dBm)	High power peak trans- mitter powe (dBm)	
1	7 14 17 18.8 20	20 27 30 31.8 33	

4.1.1 Test Over View

Results	Complies (as tested	d per this	report)			Date		6/27/2	015	
Standard	FCC Part 90.1215									
Product	RF-7800W	RF-7800W Serial#					A00451			
Test Set-up	Direct Measurement	Direct Measurement from antenna port								
EUT Powered By	Power over Ethernet	Temp	22° C	Hu	midity	32%	Press	sure	1010mbar	
Perf. Criteria	(Below Limit)	Perf. Verification			Read	Readings Under Limit				
Mod. to EUT	None	Test Performed By			Ranc	Randall E Masline				

4.1.2 Test Procedure

The peak output power was measured at the low, mid and high band frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The cable loss and the attenuator was measured and added in the reference level offset in the spectrum analyzer. The spectrum analyzer's resolution bandwidth was greater than the 20dB bandwidth of the modulated carrier and the video bandwidth was equal to the resolution bandwidth.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

TUV Rheinland of North America, Inc., Building 199, 710 Resende Road, Webster NY 14580. Tel: 585-645-0125



Report No.: 31551685.004 Harris Part 90.doc

Page 31 of 89

Test Setup:



4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Power output test.

4.1.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

4.1.5 Peak Power Output Results

As tested, the EUT was found to be compliant to the requirements of the test standard.



Page 32 of 89

5 MHz Sp	MHz Spacing 8 dBi Antenna								
							8 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	28	22.50	27	-5.5	31	53	-22
4967.5	22	256-QAM	28	22.27	27	-4.73	30.77	53	-22.23
4987.5	22	256-QAM	28	24.32	27	-2.68	32.82	53	-20.18

Figure 10 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 8 dBi Gain antenna

10 MHz S _J	pacing	8 dBi Antenna							
							8 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	31.99	56	-24.01
4965	22	256-QAM	59	25.55	30	-4.45	34.05	56	-21.95
4985	22	256-QAM	59	24.93	30	-5.07	33.43	56	-22.57

Figure 11 – Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 8 dBi Gain antenna

20 MHz S _I	pacing	8 dBi Antenna							
							8 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	30.99	59	-28.01
4965	22	256-QAM	119	25.55	33	-7.45	34.05	59	-24.95
4980	22	256-QAM	119	21.85	33	-11.15	30.35	59	-28.65

Figure 12 – Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 8 dBi Gain antenna



Report No.: 31551685.004 Harris Part 90.doc

Page 33 of 89

5 MHz S _I	pacing	13.5 dBi Antenna							
							13.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-4.5	36.5	53	-16.5
4967.5	22	256-QAM	29	22.27	27	-4.73	36.27	53	-16.73
4987.5	22	256-QAM	29	24.32	27	-2.68	38.32	53	-14.68

Figure 13 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 13.5 dBi Gain antenna

10 MHz S ₁	pacing								
							13.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	37.49	56	-18.51
4965	22	256-QAM	59	25.55	30	-4.45	39.55	56	-16.45
4985	22	256-QAM	59	24.93	30	-5.07	38.93	56	-17.07

Figure 14 — Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 13.5 dBi Gain antenna



Report No.:	31551685.004 Harris Part 90.doc
Report No	31331003.004 Hairis Part 90.000

Page 34 of 89

20 MHz S	20 MHz Spacing								
							13.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	36.49	59	-22.51
4965	22	256-QAM	119	25.55	33	-7.45	39.55	59	-19.45
4980	22	256-QAM	119	21.85	33	-11.15	35.85	59	-23.15

Figure 15 — Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 13.5 dBi Gain antenna

5 MHz Spa	MHz Spacing								
							21 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-4.5	43.5	53	-9.5
4967.5	22	256-QAM	29	22.27	27	-4.73	43.27	53	-9.73
4987.5	22	256-QAM	29	24.32	27	-2.68	45.32	53	-7.68

Figure 16 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 21 dBi Gain antenna



Report No.:	31551685.004 Harris Part 90.doc
report No	31331003.004 Hailis Fait 30.000

Page 35 of 89

10 MHz Spacing									
							21 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	44.49	56	-11.51
4965	22	256-QAM	59	25.55	30	-4.45	46.55	56	-9.45
4985	22	256-QAM	59	24.93	30	-5.07	45.93	56	-10.07

Figure 17 — Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 21 dBi Gain antenna

20 MHz Sp	acing								
							21 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	43.49	59	-15.51
4965	22	256-QAM	119	25.55	33	-7.45	46.55	59	-12.45
4980	22	256-QAM	119	21.85	33	-11.15	42.85	59	-16.15

Figure 18 — Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 21 dBi Gain antenna



Report No.:	31551685.004 Harris Part 90.doc
Meport No	31331003.00 4 11a11131 art 30.000

Page 36 of 89

5 MHz Spacing									
							27.5 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-4.5	50	53	-3
4967.5	22	256-QAM	29	22.27	27	-4.73	49.77	53	-3.23
4987.5	22	256-QAM	29	24.32	27	-2.68	51.82	53	-1.18

Figure 19 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for a 27.5 dBi Gain antenna

10 MHz Spacing									
							26 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	49.49	56	-6.51
4965	22	256-QAM	59	25.55	30	-4.45	51.55	56	-4.45
4985	22	256-QAM	59	24.93	30	-5.07	50.93	56	-5.07

Figure 20 — Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for a 27.5 dBi Gain antenna



Report No.:	31551685.004 Harris Part 90.doc	
IVEDOLI IAO	31331003.004 Hailis I alt 30.00C	

Page 37 of 89

20 MHz S ₁	pacing								
							26 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	48.49	59	-10.51
4965	22	256-QAM	119	25.55	33	-7.45	51.55	59	-7.45
4980	22	256-QAM	119	21.85	33	-11.15	47.85	59	-11.15

Figure 21 — Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for a 27.5 dBi Gain antenna

5 MHz Sp	acing								
							30 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4942.5	22	256-QAM	29	22.50	27	-2.5	52.50	53	-0.5
4967.5	22	256-QAM	29	22.27	27	-2.73	52.27	53	-0.73
4987.5	22	256-QAM	29	22.32	27	-2.68	52.32	53	-0.68

Figure 22 – Highest Peak Conducted Power Output for all Modulations with 5 MHz channel spacing with EIRP for 30 dBi Gain antenna



Report No.:	31551685.004 Harris Part 90.doc
IVEDOLI IAO	31331003.007 Hairis I alt 30.000

Page 38 of 89

10 MHz S _I	oacing								
							30 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4945	22	256-QAM	59	23.49	30	-6.51	53.49	56	-2.51
4965	22	256-QAM	59	25.55	30	-4.45	55.55	56	-0.45
4985	22	256-QAM	59	24.93	30	-5.07	54.93	56	-1.07

Figure 23 — Highest Peak Conducted Power Output for all Modulations with 10 MHz channel spacing with EIRP for 30 dBi Gain antenna

20 MHz Sp	20 MHz Spacing								
							30 dBi Ant		
Frequency	Power	Mod	Data Rate	Peak Pwr	Peak Limit	Margin	EIRP Calc	EIRP Limit	EIRP Margin
4950	22	256-QAM	119	22.49	33	-10.51	52.49	59	-6.51
4965	22	256-QAM	119	25.55	33	-7.45	55.55	59	-3.45
4980	22	256-QAM	119	21.85	33	-11.15	51.85	59	-7.15

Figure 24 — Highest Peak Conducted Power Output for all Modulations with 20 MHz channel spacing with EIRP for 30 dBi Gain antenna



Report No.: 31551685.004 Harris Part 90.doc Page 39 of 89

4.2 Peak Power Spectral Density

4.2.1 Test Over View

High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; how- ever, they are limited to a peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the peak transmit power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point or point-to-multipoint operation (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the transmitter power or spectral density. Corresponding reduction in the peak transmit power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26dBi.

Results	Complies (as tested	Complies (as tested per this report)					,	6/24/2	015
Standard	FCC Part 90.1215	FCC Part 90.1215							
Product	RF-7800W	RF-7800W Serial# A00451							
Test Set-up	Direct Measurement from antenna port								
EUT Powered By	Power over Ethernet	Temp	22° C	H	umidity	32%	Press	sure	1010mbar
Perf. Criteria	Below Limit (10dB	low Limit (10dBm) Perf. Verifie			ication	≤21	≤21 dBm in any 1 MHz		
Mod. to EUT	None		Test Pe	rfo	rmed By	Ranc	Randall E Masline		

4.2.2 Test Procedure

Using the methods of ANSI C63.10:2009.

4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Peak Power Spectral Density test.

4.2.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.



Report No.: 31551685.004 Harris Part 90.doc

Page 40 of 89

4.2.5 Final Data

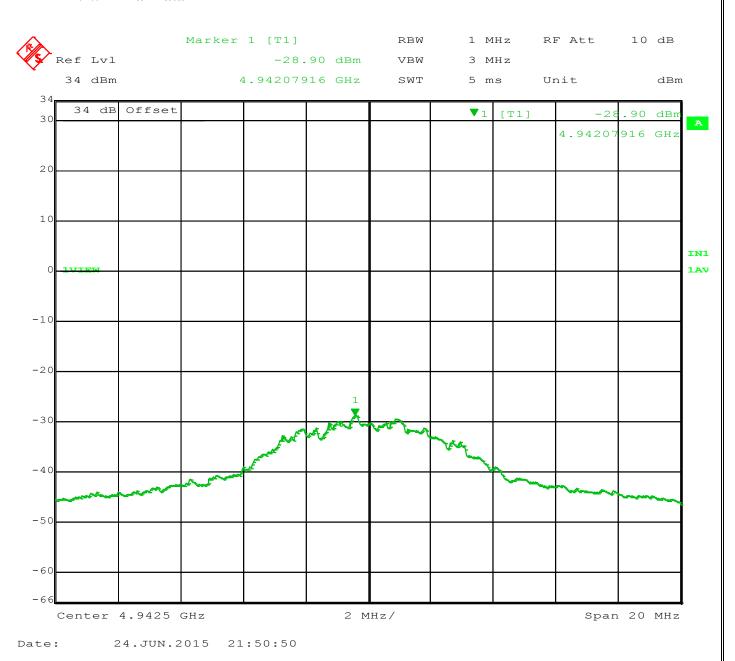


Figure 25: 4942.5 MHz at 5MHz BW



VRheinland FCCID: AQZ-RF-7800W-G2

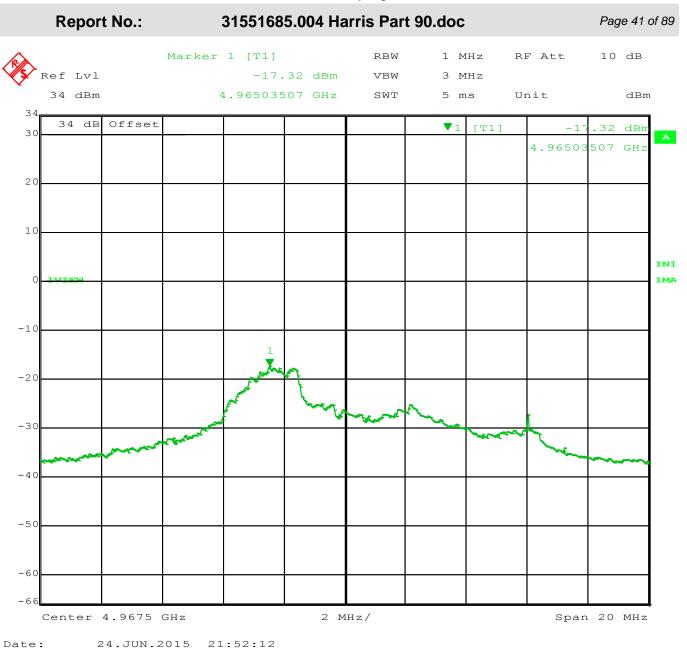


Figure 26: 4967.5 MHz at 5 MHz BW





Figure 27: 4987.5 MHz at 5 MHz BW



TUVRheinland FCCID: AQZ-RF-7800W-G2

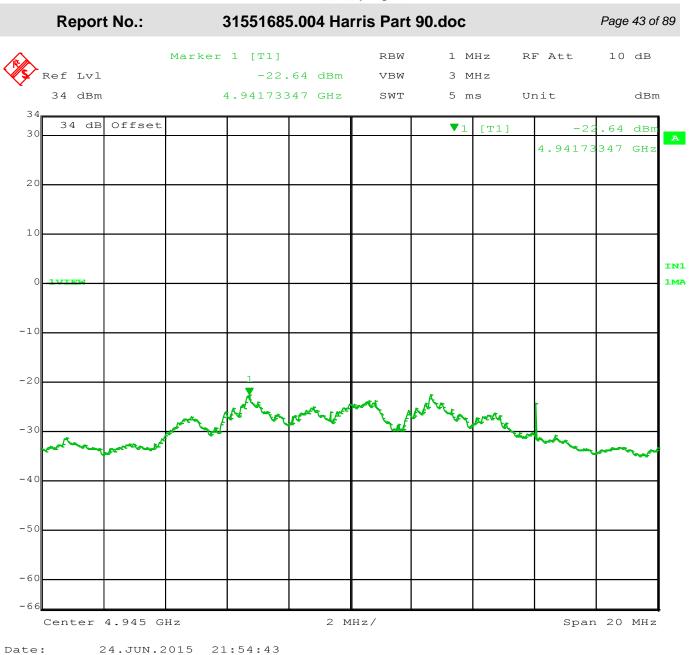


Figure 28: 4945 MHz at 10 MHz BW



TUVRheinland® FCCID: AQZ-RF-7800W-G2

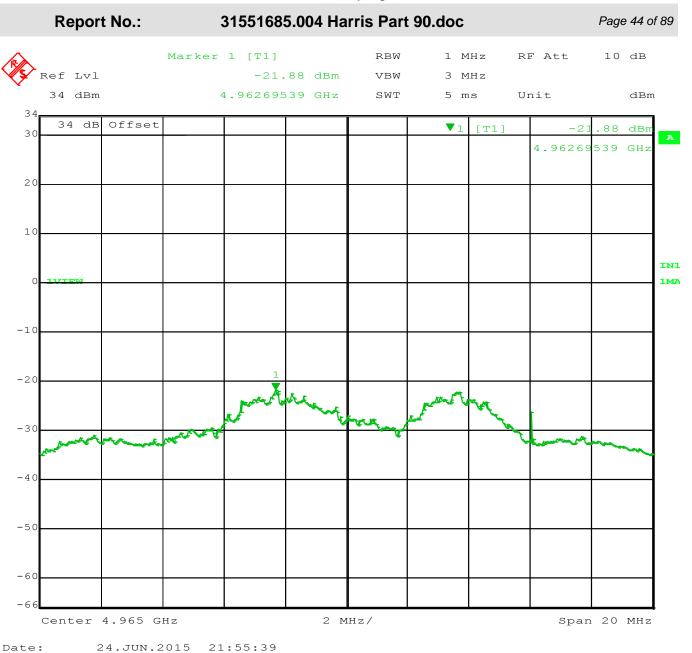


Figure 29: 4965 MHz at 10 MHz BW



TUVRheinland® FCCID: AQZ-RF-7800W-G2

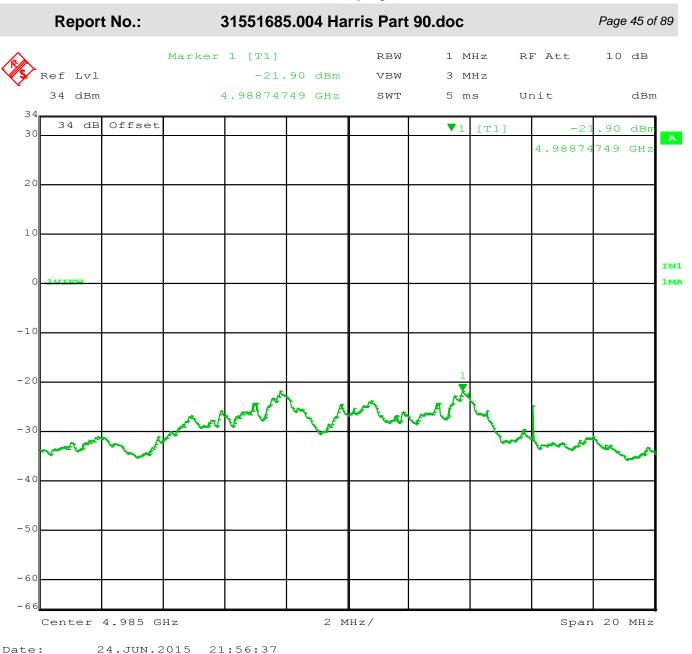


Figure 30: 4985 MHz at 10 MHz BW



JVRheinland FCCID: AQZ-RF-7800W-G2

Report No.:	;	31551685	5.004 Hai	ris Part	90.doc			Page 4	l6 of 8
Ref Lvl			.74 dBm	RBW VBW	1 N	ИНz	RF Att	10	
34 dBm		4.959048	310 GHz	SWT	5 n	ıs	Unit		dBm
34 dB Offset	t				V 1	[T1]	-2	4.74	dBm
							4.9590	4810	GHz
20									
10									
0 1VIEW								+	
0									\dashv
20						 	1	+	\dashv
	K		No.				. †		
30	A Procession	A TOTAL SERVICE		And	The state of the s	War	to torce.	-	
A party and the same of	T ¥		₩		¥		- Mary	Jana .	
10								<u> </u>	\Box
50									
50									_
									\sqcap
Center 4.95 G	<u> </u>		3 M	II = /	l			n 30 :	

Figure 31: 4950 MHz at 20 MHz BW



TUVRheinland® FCCID: AQZ-RF-7800W-G2

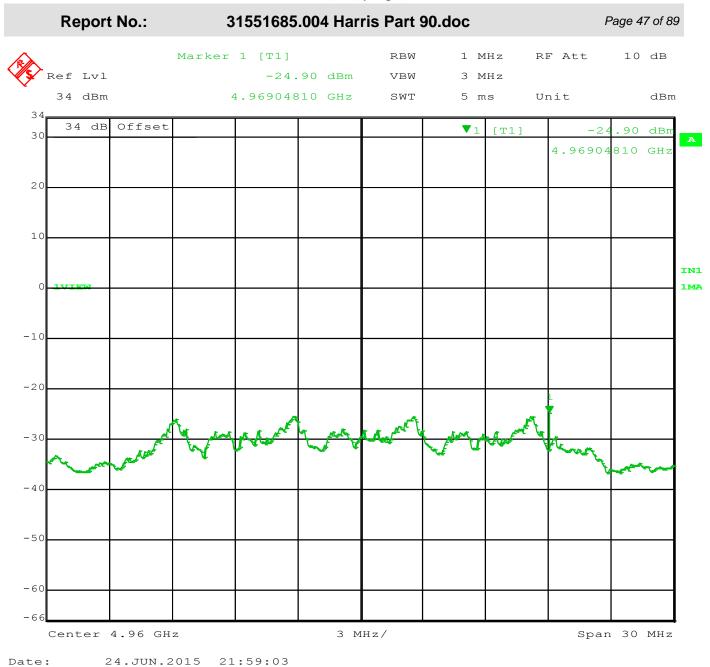


Figure 32: 4960 MHz at 20 MHz BW



einland FCCID: AQZ-RF-7800W-G2

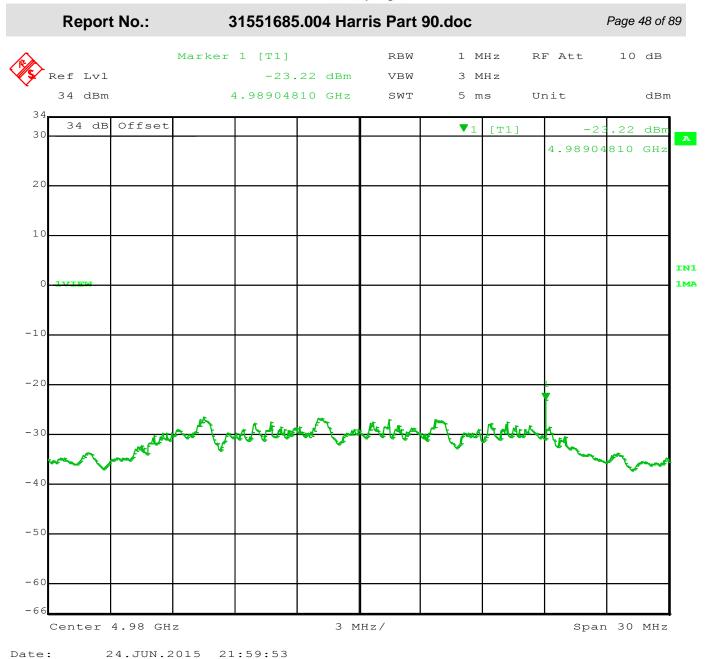


Figure 33: 4980 MHz at 20 MHz BW



Report No.: 31551685.004 Harris Part 90.doc

Page 49 of 89

4.3 99% Occupied Bandwidth

The following channel center frequencies are permitted to be aggregated for channel bandwidths of 5, 10, 15 or 20 MHz Channel numbers 1 through 5 and 15 through 18 are 1 MHz channels and channels numbers 6 through 14 are 5 MHz channels.

4.3.1 Test Over View

Results	Complies (as tested	Complies (as tested per this report)						6/27/2	015
Standard	FCC Part 90.1213 &	FCC Part 90.1213 & 2.1049							
Product	RF-7800W Serial#				A004	451			
Test Set-up	Direct Measurement from antenna port								
EUT Powered By	Power over Ethernet	Temp	22° F	H	umidity	32%	Pres	ssure	1010 mbar
Perf. Criteria	(Below Limit) No l Specified	imit	Perf. V	erif	ication	tion Readings Under Limit			imit
Mod. to EUT	None		Test Pe	rmed By	Ranc	Randall E Masline			

4.3.2 Test Procedure

The 99% occupied bandwidth is measured using EMI receiver (spectrum analyzer) with RBW = 1% of 99% OBW, VBW >=RBW.

4.3.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Occupied Bandwidth test.

4.3.4 Final Test

The EUT met the performance criteria requirement as specified in the standards.

4.3.5 Final Data

MS-0005239



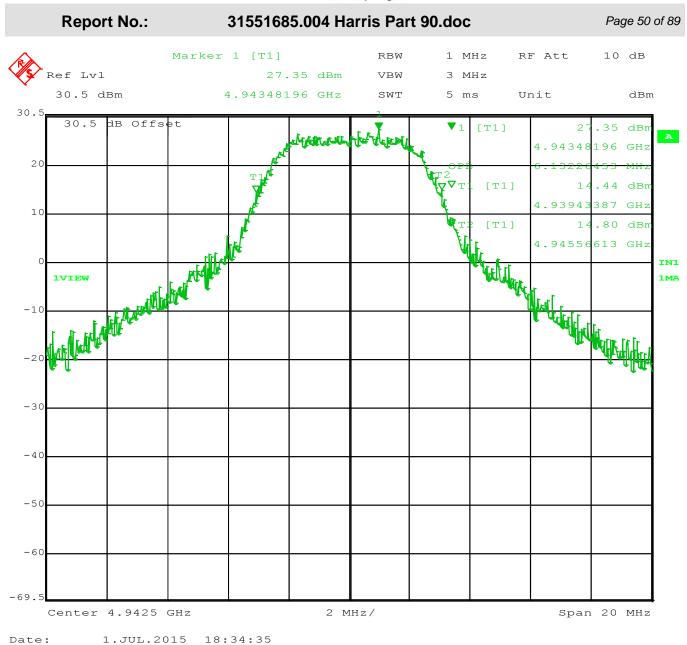


Figure 34: 99% Occupied Bandwidth 4942.5 MHz - 5 MHz Channel



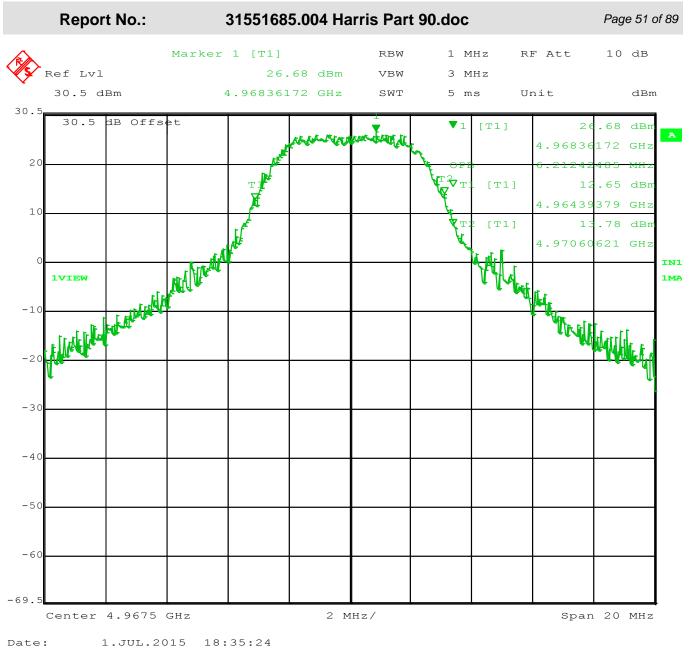


Figure 35: 99% Occupied Bandwidth 4967.5 MHz - 5 MHZ Channel



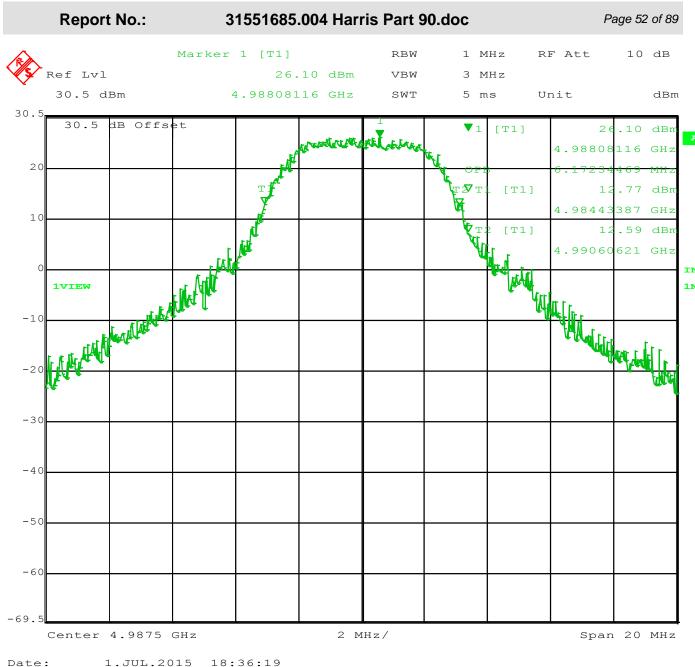


Figure 36: 99% Occupied Bandwidth 4987.5 MHz - 5 MHZ Channel



Report No.: 31551685.004 Harris Part 90.doc

Page 53 of 89

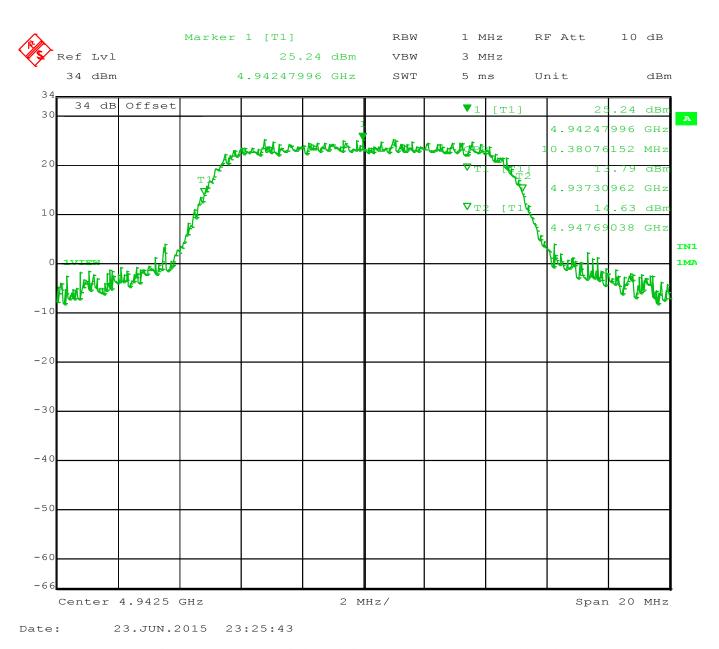


Figure 37: 99% Occupied Bandwidth 4945 MHz - 10 MHZ Channel



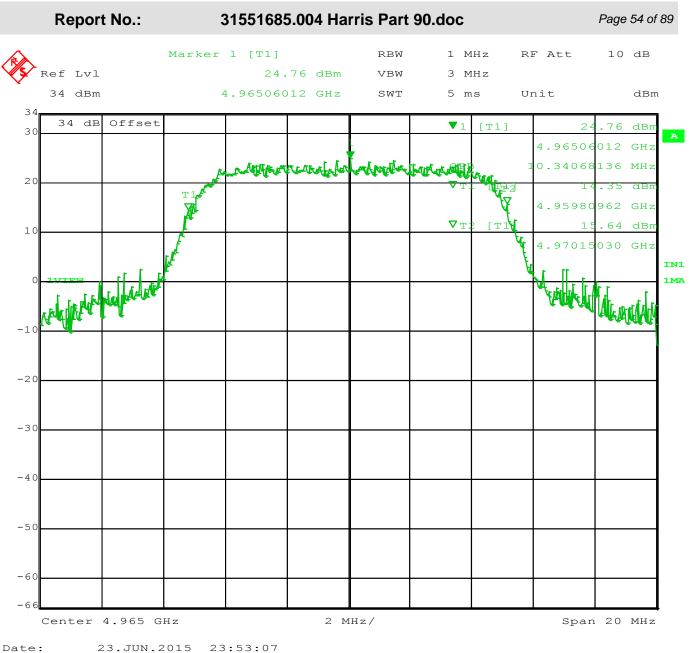


Figure 38: 99% Occupied Bandwidth 4965 MHz - 10 MHz Channel



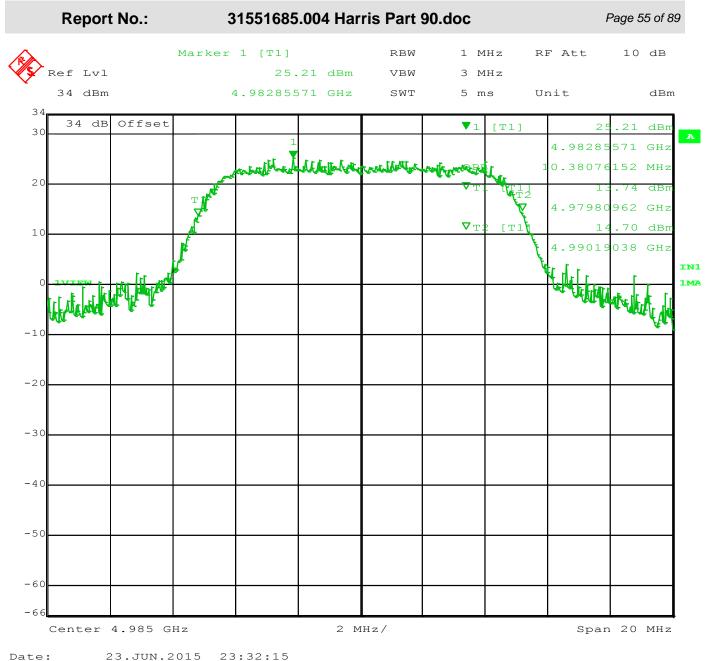


Figure 39: 99% Occupied Bandwidth 4985 MHz - 10 MHz Channel



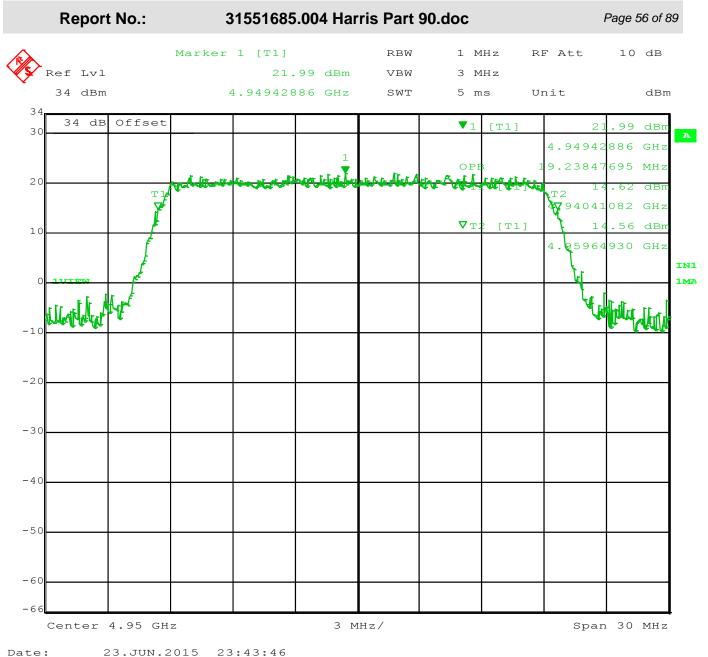


Figure 40: 99% Occupied Bandwidth 4950 MHz - 20 MHz Channel



neinland FCCID: AQZ-RF-7800W-G2

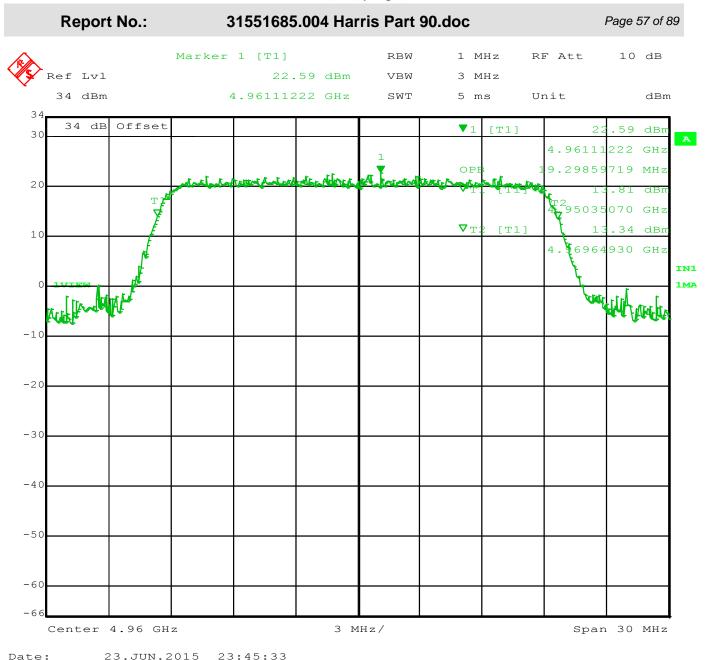


Figure 41: 99% Occupied Bandwidth 4960 MHz - 20 MHz Channel



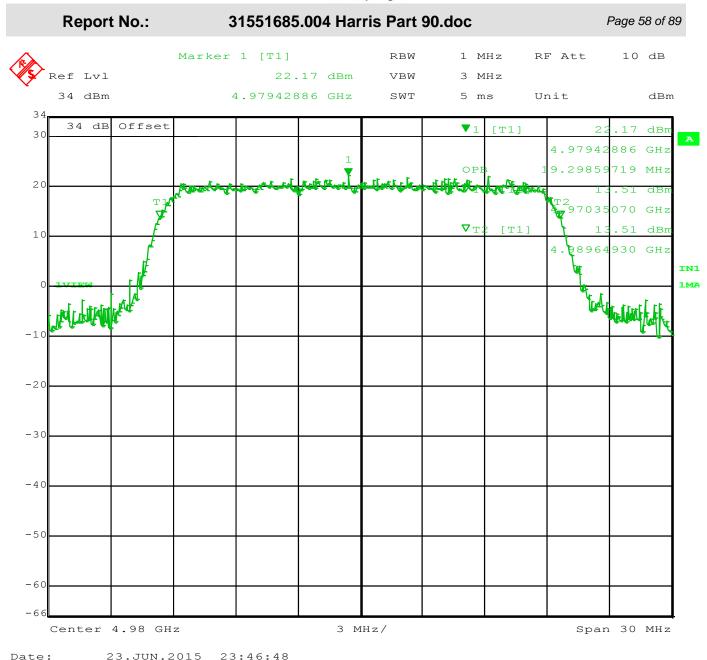


Figure 42: 99% Occupied Bandwidth 4980 MHz - 20 MHz Channel



Report No.: 31551685.004 Harris Part 90.doc

Page 59 of 89

4.4 Frequency Stability FCC Part 90.213 and 2.1055

4.4.1 Over View of Test

Results	Complies (as tested per this report)				Date	7/2/2015	
Standard	FCC Part 90.213 and						
Product	RF-7800W Seria			ial#	Al# A00451		
Test Set-up	Tested in shielded room. EUT placed on table, see test plans for details						
Mod. to EUT	None				E Masli	ne	

4.4.2 Test Procedure

- (a) The frequency stability shall be measured with variation of ambient temperature as follows: From -30 to +50 centigrade except that specified in subparagraph (2) & (3) of this paragraph.
- (b) Frequency measurements shall be made at extremes of the specified temperature range and at intervals of not more than 10 centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stability circuitry need be subjected to the temperature variation test.
- (d) The frequency stability supply shall be measured with variation of primary supply voltage as follows:
 - (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
 - (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.
 - (3) The supply voltage shall be measured at the input to the cable normally provide with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
 - (e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment).



Report No.: 31551685.004 Harris Part 90.doc

Page 60 of 89

4.4.3 Final Test

As tested, the EUT was found to be compliant to the requirements of the test standard.

The output power and frequency did not change or waiver by varying the input voltage to the POE black box.

Center Frequency	4945 MHz
Power Level	22 dBm
Frequency Tolerance Limit	Not Specified
Max Frequency Tolerance Measured	
Input Voltage Rating	100-240VAC

CENTER FREQUENCY & RF POWER OUTPUT VARIATION

Ambient Temperature	Supply Voltage	Supply Voltage	Supply Voltage
_	Nominal 120 VAC	85% of Nominal	115% of Nominal
		100VAC	230VAC
(C °)	Hz	Hz	Hz
-40	+29850	+29850	+29850
+20	0	0	0
+60	+46500	+46500	+46500



Report No.: 31551685.004 Harris Part 90.doc Page 61 of 89

5 Conducted Emission Limits FCC 90.210

- (a) The power of emission outside any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P) \text{ dB}$, whichever is the lesser attenuation..
- (b) The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least one percent of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

Results	Complies (as tested	report)			Date	!	7/2/20	015		
Standard	FCC 90.210									
Product	RF-7800W			Serial#	A004	A00451				
Configuration	See test plan for details									
Test Set-up	Tested in a 10m Semi-Anechoic Chamber placed on table 80cm above the ground plane on a turn-table.									
EUT Powered By	Power over Ethernet	Temp	23° C	Hı	umidity	32%	Pres	ssure	1010mbar	
Frequency Range	30 MHz to 40 GHz	@ 3m	•							
Perf. Criteria	(Below Limit)		Perf. Verification			Read	Readings Under Limit			
Mod. to EUT	None		Test Pe	rfor	med By	Ranc	lall E I	Masline		

5.1.1 Test Procedure

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049 and the transmitter was operated in full rated power, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 1 MHz, VBW > RBW and SWEEP TIME = AUTO)..

5.1.2 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

5.1.3 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

TUV Rheinland of North America, Inc., Building 199, 710 Resende Road, Webster NY 14580. Tel: 585-645-0125



Report No.: 31551685.004 Harris Part 90.doc

Page 62 of 89

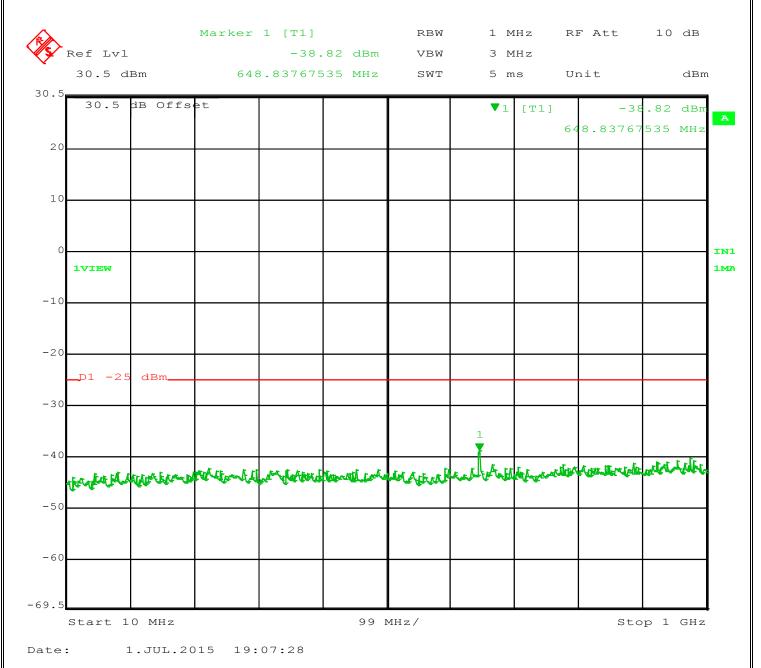


Figure 43 – Spurs 4942.5 MHz – 5 MHz Channel, 10 MHz - 1 GHz



Rheinland® FCCID: AQZ-RF-7800W-G2

Report No.: 31551685.004 Harris Part 90.doc Page 63 of 89 Marker 2 [T1] RBW 1 MHz RF Att 10 dB Ref Lvl -31.06 dBm VBW 3 MHz 34 dBm 6.97895792 GHz SWT 260 ms Unit dBm 34 dВ Offset **V**2 dBr 6.9789 792 GH: **V**1 [T1] 02 dBr 20 10 IN1 1MA -10-20 -50 -60 -66 Start 1 GHz 2.55 GHz/ Stop 26.5 GHz

Figure 44 – Spurs 4942.5 MHz – 5 MHz Channel, 1-26.5 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Date:

26.JUN.2015

03:02:26



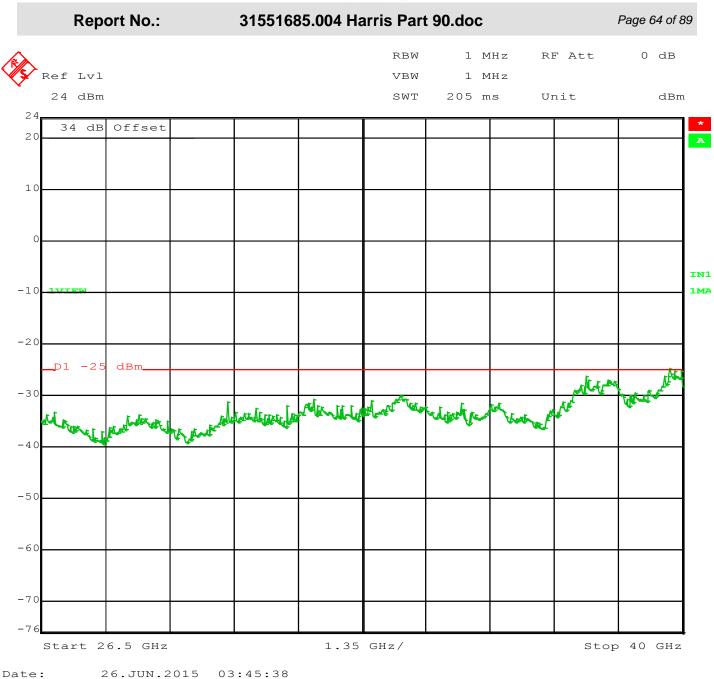


Figure 45 - Spurs 4942.5 MHz - 5 MHz Channel, 26.5 - 40 GHz



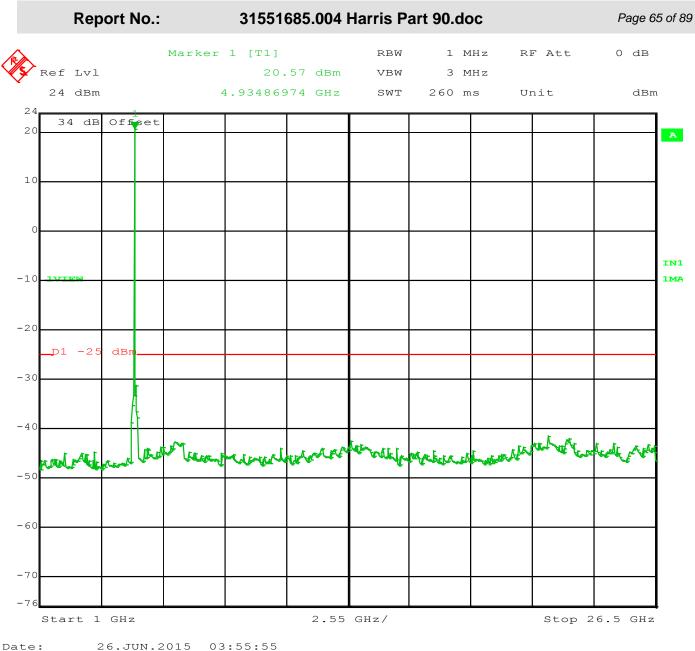


Figure 46 - Spurs 4967.5 MHz - 5 MHz Channel, 1-26.5 GHz



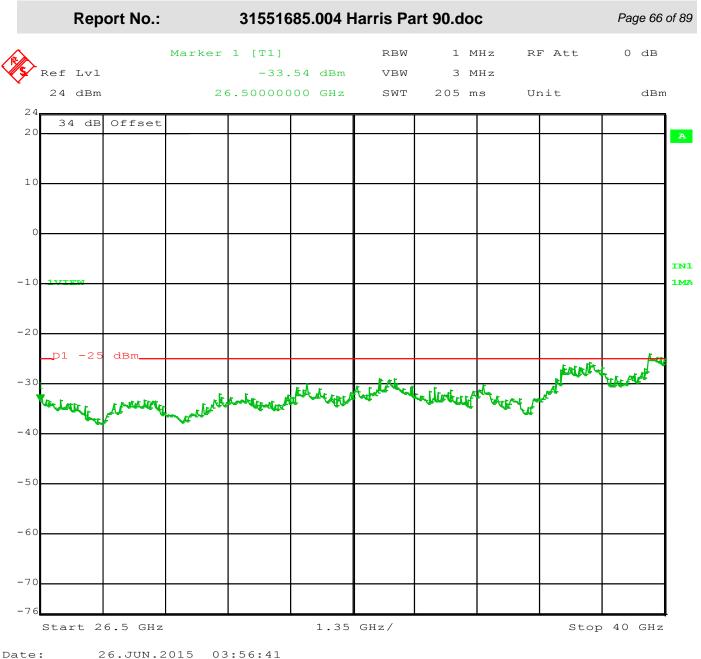


Figure 47 - Spurs 4967.5 MHz - 5 MHz Channel, 26.5 - 40 GHz



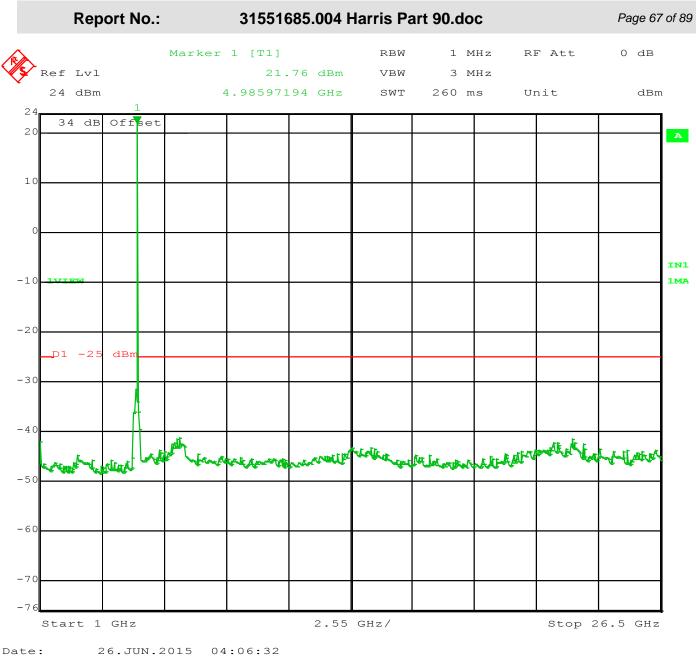


Figure 48 - Spurs 4987.5 MHz - 5 MHz Channel, 1 - 26.5 GHz



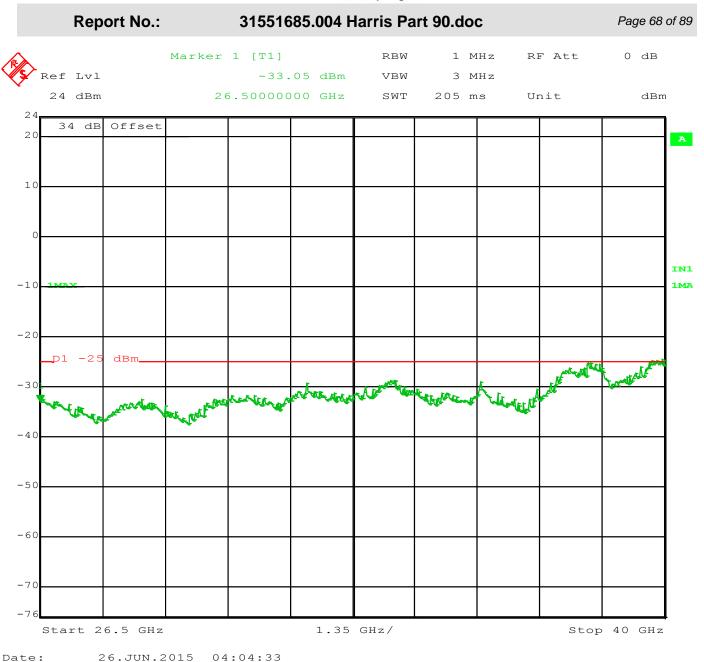


Figure 49 - Spurs 4987.5 MHz - 5 MHz Channel, 26.5 - 40 GHz



JVRheinland FCCID: AQZ-RF-7800W-G2

	Report No.:		0.001	-33.30 F	Harris Pa		•			Page 6
30.5 dBm 648.83767535 MHz SWT 5 ms Unit di 30.5 dB Offset								RF At	t 1	0 dB
30.5 dB Offset										
30.5 dB Offset		648	.837675	35 MHz	SWT	5 n	ns	Unit		dBi
IVIEW D1 -25 dBm	30.5 dB Offs	et				▼ 1	[T1]		-39.52	2 dBr
								648.83	3767535	5 MH:
	1377 1377									
	IVIEW									
10 to see the second se						1				
to be a special of the second						¥ #				e alle
	THE PROPERTY OF THE PARTY OF TH	تلاسيدنسلانيانه	LEWALL TOWN	the Longitudia	francist fra	Frank offer	Late Tales	are allere		
Start 10 MHz 99 MHz/ Stop 1 GF	Start 10 MHz									

Figure 50 - Spurs 4945 MHz - 10 MHz Channel, 10 MHz - 1 GHz



TUVRheinland FCCID: AQZ-RF-7800W-G2

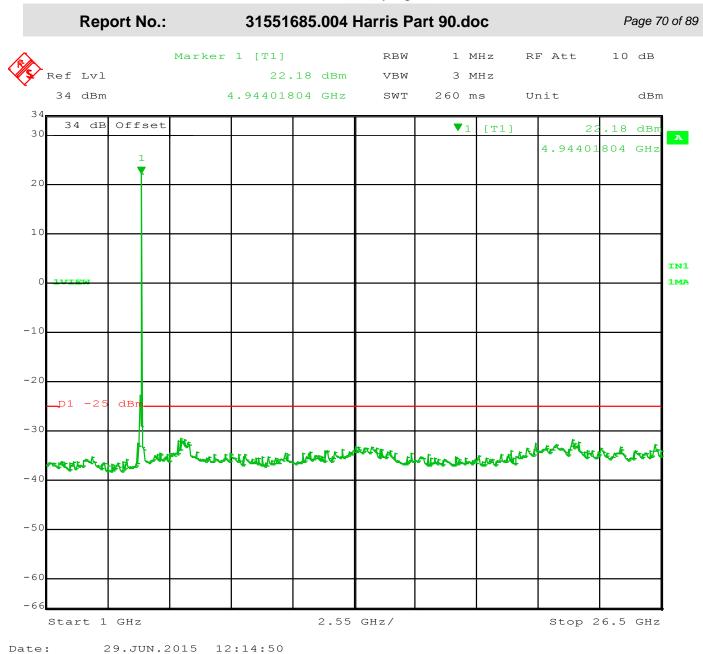


Figure 51 - Spurs 4945 MHz - 10 MHz Channel, 1 - 26.5 GHz



TUVRheinland® FCCID: AQZ-RF-7800W-G2

Report No.:	315516	31551685.004 Harris Part 90.doc						
	Marker 1 [T1]		RBW 1 MH:		Hz R	F Att	0 dB	
Ref Lvl	-33	.40 dBm	VBW	3 M	Ηz			
24 dBm	26.50000	000 GHz	SWT	205 m	is U	nit	dBm	m
34 dB Offset	:			V 1	[T1]	-33	.40 dBm	n
						26.50000	000 GHz	Z
								1
						1		1
								I
1VIEW		++						4
								I
								I
								1
						Menter	Little	Ť
	had to	Allend A to make	Marge Land	Autrolla or es	Alexander	and the same of th	- Tune	1
with the winter of	a ractional which by	444	•	Afte	W C			
		+						┨
								I
								4
								1
		 				+		1
6								Ţ

Figure 52 - Spurs 4945 MHz - 10 MHz Channel, 26.5 - 40 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Date:

29.JUN.2015 12:15:42



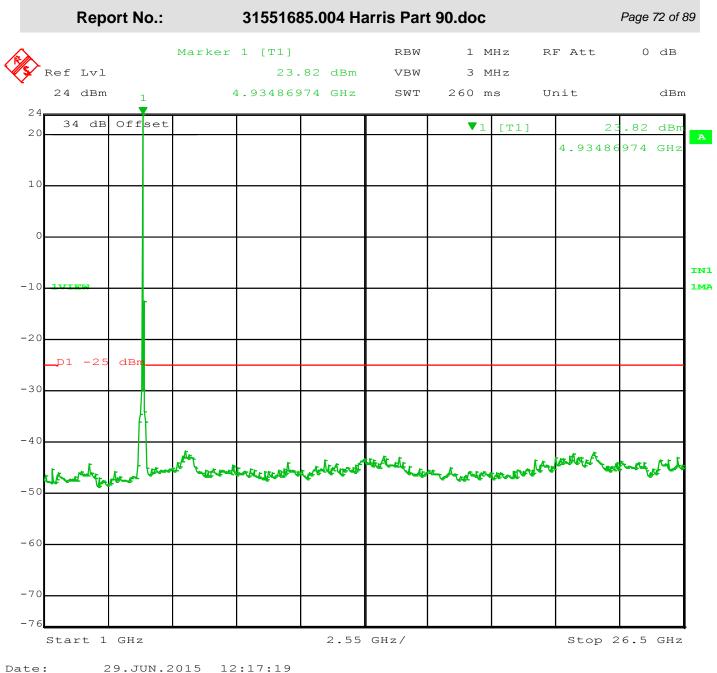


Figure 53 - Spurs 4965 MHz - 10 MHz Channel, 1 - 26.5 GHz



TUVRheinland FCCID: AQZ-RF-7800W-G2

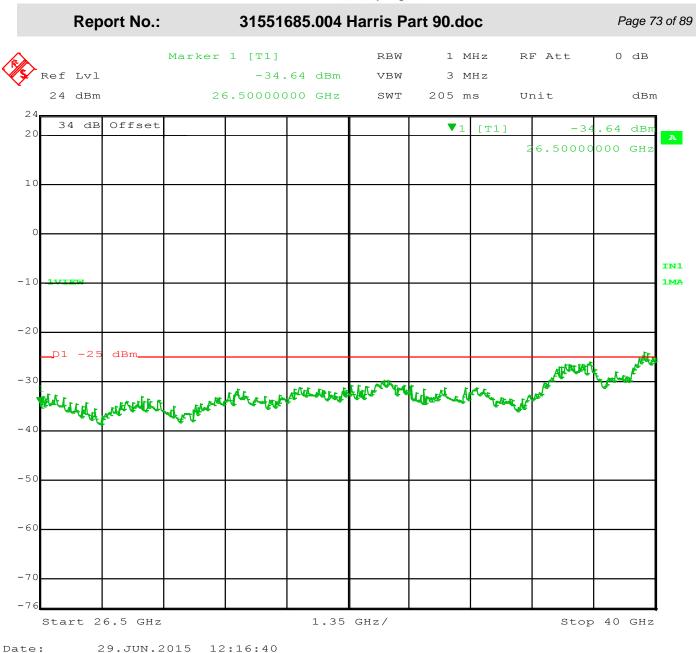


Figure 54 - Spurs 4965 MHz - 10 MHz Channel, 26.5 - 40 GHz



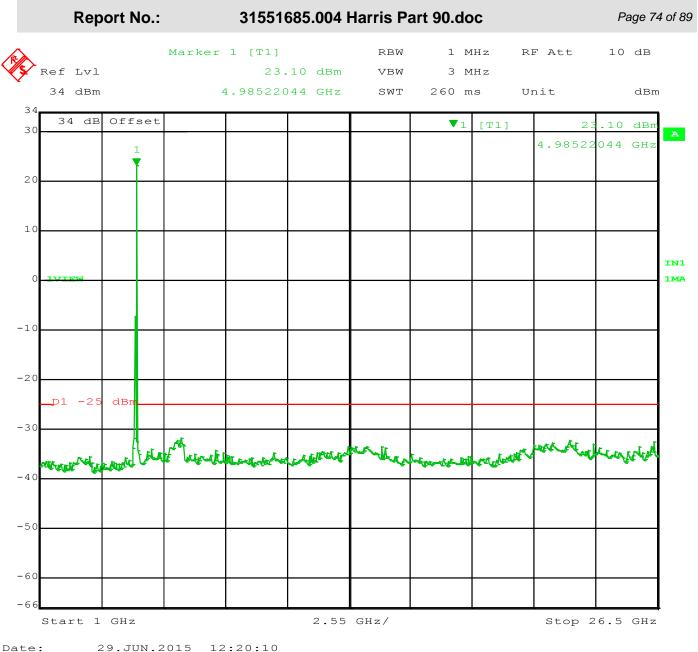


Figure 55 - Spurs 4985 MHz - 10 MHz Channel, 1 - 26.5 GHz



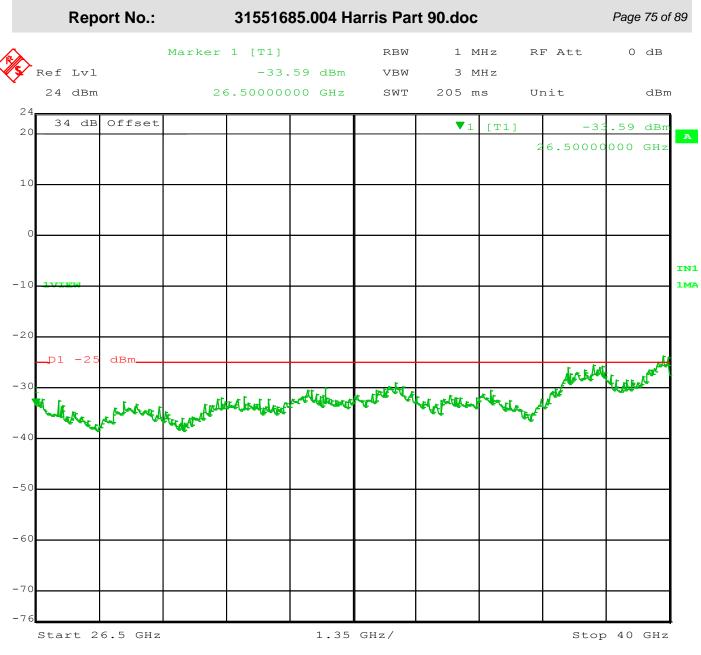


Figure 56 - Spurs 4985 MHz - 10 MHz Channel, 26.5 - 40 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Date:

29.JUN.2015

12:20:50



		1.00	noon, mgma					
Report No.:	31	551685.004 H	Harris Pai	rt 90.doc	;		Page 76	6 c
	Marker 1 [т1]	RBW	1 M	IHz	RF Att	10 d	lB
Ref Lvl		-39.99 dBm	VBW	3 M	IHz			
	648.83	767535 MHz	SWT	5 m	ıs	Unit	d:	lBr
30.5 dB Offs	et			V 1	[T1]	-3	39.99 di	Bn
						648.8376	57535 MI	Ηz
			+					
1VIEW								
_D1 -25 dBm								
)								
				1				
warden and that the	ANTAL LINE	يتنيمهم بعر يغرانه يعزاهم		tout we	colinations.	والمسائد المالية	المسائد المساهري	Ţ
Start 10 MHz			MHz/				op 1 GI	

Figure 57 - Spurs 4950 MHz - 20 MHz Channel, 10 MHz - 1 GHz



heinland FCCID: AQZ-RF-7800W-G2

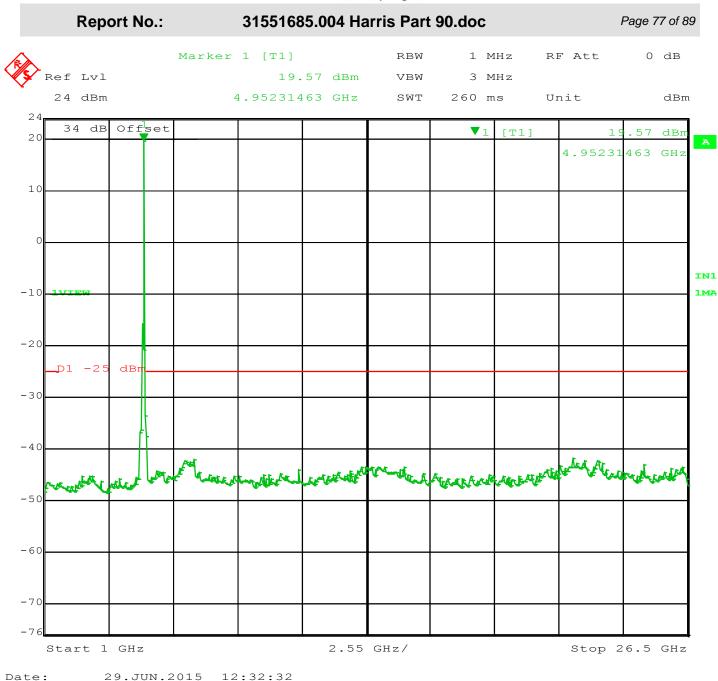


Figure 58 - Spurs 4950 MHz - 20 MHz Channel, 1 - 26.5 GHz



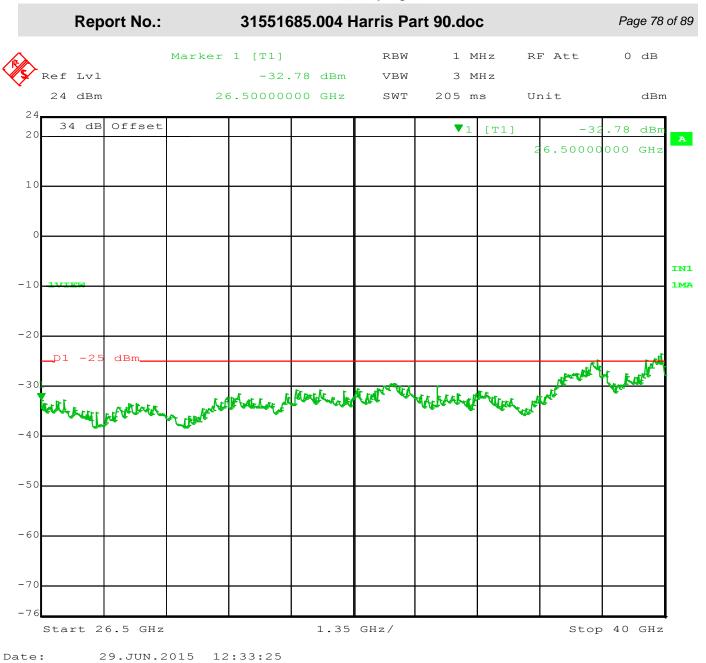


Figure 59 - Spurs 4950 MHz - 20 MHz Channel, 26.5 - 40 GHz



31551685.004 Harris Part 90.doc **Report No.:** Page 79 of 89 Marker 1 [T1] RBW 1 MHz RF Att 0 dB Lvl 20.00 dBm VBW 3 MHz dBm 4.93486974 GHz SWT 260 ms Unit 2.4 dBm dВ Offset 4.93486 974 IN1 1MA dBi -40Start 1 GHz 2.55 GHz/ Stop 26.5 GHz

Figure 60 - Spurs 4960 MHz -20 MHz Channel, 1 - 26.5 GHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

Date:

29.JUN.2015

12:35:19



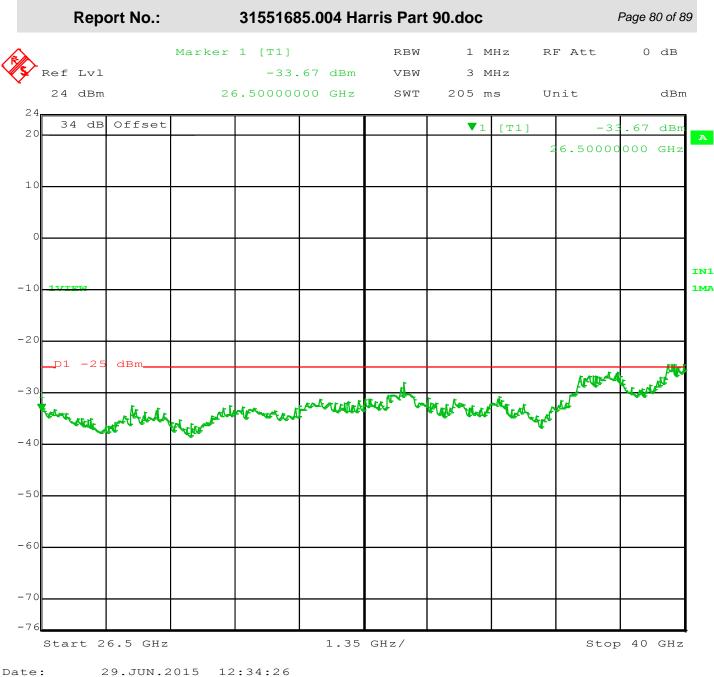


Figure 61 - Spurs 4960 MHz - 20 MHz Channel, 26.5 - 40 GHz



TUVRheinland® FCCID: AQZ-RF-7800W-G2

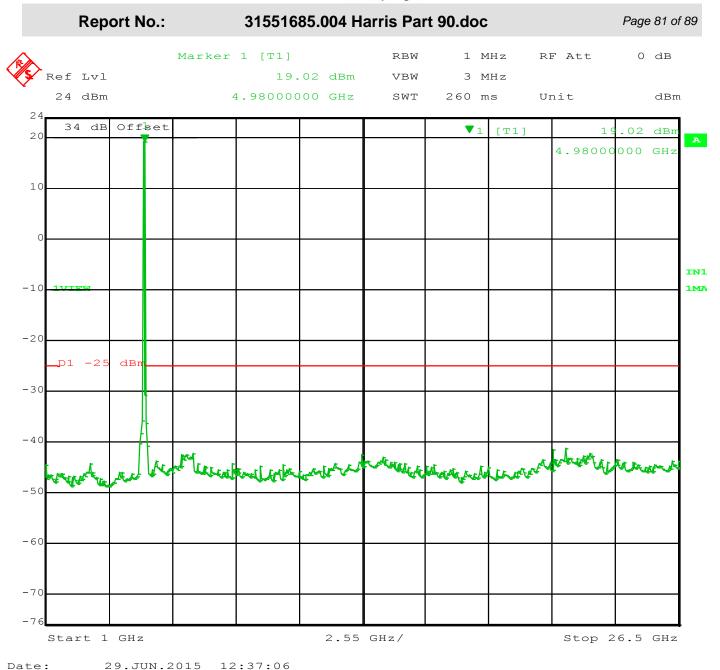


Figure 62 - Spurs 4980 MHz - 20 MHz Channel, 1 - 26.5 GHz



Rheinland FCCID: AQZ-RF-7800W-G2

Report No.:	3155168	35.004 Harri	is Part	90.doc		F	Page 82 of 89
	Marker 1 [T1]		RBW	1 M	Ηz	RF Att	0 dB
Ref Lvl	-33	.80 dBm	VBW	3 M	Ηz		
24 dBm	26.50000	000 GHz	SWT	205 m	S	Unit	dBm
34 dB Offset				V 1	[T1]	-33	.80 dBm
						26.50000	000 GHz
) 1VIEW							
_D1 -25 dBm							r.
			act.			- Low Mary	- Later Cap
and the second	talitie wastania d	the period of the second	Maria	تدأوي مناب	وطمالارأوامرا		
0							
5							

Figure 63 - Spurs 4980 MHz - 20 MHz Channel, 26.5 - 40 GHz

29.JUN.2015 12:37:46



Report No.: 31551685.004 Harris Part 90.doc

Page 83 of 89

6 RF Exposure

6.1 Exposure Requirements – FCC Parts 90.1217, 1.1307 and 1.1310

FCC 90.1217:- Licensees and manufacturers are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of mobile or portable devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

Frequency Range	Electric Field Strength	Magnetic Field Strength	Power Density (mW/cm ²)	Average Time	
(MHz)	(V/m)	(A/m)		(minutes)	
LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE					
1500-100,000			5	6	
(A) Limits for Occupational/Control Exposures					
1500-100,000			1.0	30	

(B) Limits for General Population/Uncontrolled Exposure

F = Frequency in MHz

6.1.1 RF Exposure Limit

According to FCC 1.1310 table 1: The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b)



Report No.:

31551685.004 Harris Part 90.doc

Page 84 of 89

TABLE 1-LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm²)	Averaging time (minutes)			
(A) Lim	(A) Limits for Occupational/Controlled Exposures						
0.3–3.0 3.0–30 30–300 300–1500 1500–100,000	614 1842# 61.4	1.63 4.89/f 0.163	*(100) *(900/f²) 1.0 f/300 5	6 6 6			
(B) Limits	(B) Limits for General Population/Uncontrolled Exposure						
0.3-1.34	614	1.63	*(100)	30			
1.34-30	824/1	2.19/f	*(180/f²)	30			
30-300	27.5	0.073	0.2	30			
300-1500			f/1500	30			

F = Frequency in MHz

6.1.1.1 Antenna Gain

The maximum Gain measured in Semi-Anechoic Chamber is 8 dBi or 7.08 (numeric).

13.5 dBi or 25.12 (numeric)

21 dBi or 125.89 (numeric)

26 dBi or 398.11 (numeric)

30 dBi or 1000 (numeric)

6.1.1.2 Output Power into Antenna & RF Exposure value at distance >20cm: Mobile

Calculations for this report are based on highest power measurement and all the various antenna gains. Limit for MPE (from FCC part 1.1310 table 1) is 5 mW/cm² for professionally installed devices.

The highest output power is 25.55 dBm at 4965 MHz, this frequency and power will be used for all Antenna Calculations.



Report No.: 31551685.004 Harris Part 90.doc

Page 85 of 89

8 dBi Gain Antenna at 4965 MHz

Corrected (including cal		
factors) Measurment:	25.55	dBm
The Gain of the		
antenna:	8.00	dBi
Type of Measurment:	Conducted	Direct measurement at Antenna Port
Impedance:	50.00	Ω
Measureing Distance:	3.00	m Not used for Direct measurements.
Time weighted Duty		
Cycle:	100.00	%

Frequency range from 10 MHz to 40 GHz:

Frequency:	4965	MHz

Power output with DC and antenna Gain (EiRP):

	Power (dBm):	33.55
	Power (mW):	2264.644
	Power (W):	2.264644

-00

R = distance in	20	cm
	_~	• • • • •

FCC:		
Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.4505367	mW/cm ²
Controlled Margin to Limit =	4.5495	mW/cm ²
Uncontrolled Margin to Limit =	0.5495	mW/cm ²



Report No.: 31551685.004 Harris Part 90.doc

Page 86 of 89

While using the following antenna a minimum separation distance must be at least 30 cm

13.5 dBi Gain Antenna

Corrected (including cal factors) Measurment: 25.55 dBm The Gain of the dBi antenna: 13.50 Direct measurement at Antenna Type of Measurment: Conducted Port Impedance: 50.00 Ω 3.00 Measureing Distance: m Time weighted Duty % Cycle: 100.00

The Power Out would

be: 0.358921935 Watts
or: 358.92193 mW
or: 358921.93 μW
or: 25.55 dBm

Frequency range from 10 MHz to 40 GHz:

Frequency: 4965 MHz

Power output with DC and antenna Gain (EiRP):

Power (dBm):	39.05
Power (mW):	8035.261
Power (W):	8.035261

R = distance in	30	cm

FCC:		
Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.7104731	mW/cm ²
Controlled Margin to Limit =	4.2895	mW/cm ²
Uncontrolled Margin to Limit =	0.2895	mW/cm ²



Report No.:

31551685.004 Harris Part 90.doc

Page 87 of 89

While using the following antenna a minimum separation distance must be at least 60 cm

21 dBi Gain Antenna

Corrected (including cal factors) Measurment: 25.55 dBm The Gain of the dBi antenna: 21.00 Direct measurement at Antenna Conducted Port Type of Measurment: Impedance: 50.00 Ω 3.00 Measureing Distance: m Time weighted Duty % Cycle: 100.00

The Power Out would

0.358921935 Watts be: or: 358.92193 mW 358921.93 μW or: 25.55 or: dBm


Frequency range from 10 MHz to 40 GHz:

4965 MHz Frequency:

Power output with DC and antenna Gain (EiRP):

Power (dBm):	46.55
Power (mW):	45185.594
Power (W):	45.185594

	R = distance in	60	cm
--	-----------------	----	----

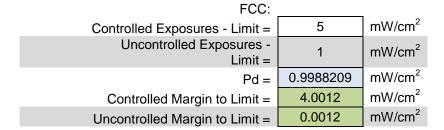



Report No.: 31551685.004 Harris Part 90.doc

Page 88 of 89

While using the following antenna a minimum separation distance must be at least 120 cm

26 dBi Gain Antenna

Corrected (including cal 25.55 factors) Measurment: dBm The Gain of the antenna: 26.00 dBi Direct measurement at Antenna Type of Measurment: Conducted Port Ω Impedance: 50.00 Measureing Distance: 3.00 m Time weighted Duty 100.00 Cycle: %

The Power Out would

be: 0.358921935 Watts
or: 358.92193 mW
or: 358921.93 μW
or: 25.55 dBm

Frequency range from 10 MHz to 40 GHz:

Frequency: 4965 MHz

Power output with DC and antenna Gain (EiRP):

Power (dBm): 51.55
Power (mW): 142889.396
Power (W): 142.889396

Ī	R = distance in	120	cm

FCC:		
Controlled Exposures - Limit =	5	mW/cm ²
Uncontrolled Exposures - Limit =	1	mW/cm ²
Pd =	0.7896373	mW/cm ²
Controlled Margin to Limit =	4.2104	mW/cm ²
Uncontrolled Margin to Limit =	0.2104	mW/cm ²



Report No.: 31551685.004 Harris Part 90.doc

Page 89 of 89

While using the following antenna a minimum separation distance must be at least 170 cm

30 dBi Gain Antenna

Corrected (including cal		
factors) Measurment:	25.55	dBm
The Gain of the		
antenna:	30.00	dBi
		Direct measurement at Antenna
Type of Measurment:	Conducted	Port
Impedance:	50.00	Ω
Measureing Distance:	3.00	m
Time weighted Duty		
Cycle:	100.00	%

The Power Out would

be: 0.358921935 Watts or: 358.92193 mW or: 358921.93 µW or: 25.55 dBm

Frequency range from 10 MHz to 40 GHz:

	Frequency:	4965	MHz

Power output with DC and antenna Gain (EiRP):

(=::::):		
	Power (dBm):	55.55
	Power (mW):	358921.935
	Power (W):	358.921935

		-
R = distance in	170	cm

