

TEST REPORT

Reference No..... : WTX22X04067195W001
FCC ID : 2A4WI-SPACE2
Applicant : Sosmart Spa (SoyMomo SA)
Address : Ricardo Lyon 1688, Providencia, Santiago, Chile
Manufacturer : SHENZHEN IWONLEX TECHNOLOGY CO.,LTD
Address : 13A01, Building 4, Tangwei City Garden, Tangwei Community, Fuhai Street,
Baoan District, Shenzhen
Product Name : Kids GPS watch
Model No..... : Space 2.0
Standards : FCC Part 22H, FCC Part 24E
Date of Receipt sample : 2022-04-12
Date of Test..... : 2022-04-12 to 2022-05-24
Date of Issue : 2022-05-24
Test Report Form No. : WTX_Part 22_ Part 24W
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.


Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Jason Su

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	9
1.7 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. RF OUTPUT POWER	13
3.1 STANDARD APPLICABLE.....	13
3.2 TEST PROCEDURE.....	13
3.3 SUMMARY OF TEST RESULTS/PLOTS	13
4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....	17
4.1 STANDARD APPLICABLE.....	17
4.2 TEST PROCEDURE.....	17
4.3 SUMMARY OF TEST RESULTS	17
5. EMISSION BANDWIDTH.....	18
5.1 STANDARD APPLICABLE.....	18
5.2 TEST PROCEDURE.....	18
5.3 SUMMARY OF TEST RESULTS/PLOTS	18
6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....	19
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. SPURIOUS RADIATED EMISSIONS.....	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	20
8. FREQUENCY STABILITY	31
8.1 STANDARD APPLICABLE.....	31
8.2 TEST PROCEDURE.....	31
8.3 SUMMARY OF TEST RESULTS/PLOTS	31
9. MODULATION CHARACTERISTICS	32
9.1 STANDARD APPLICABLE.....	32
9.2 TEST PROCEDURE.....	32
9.3 SUMMARY OF TEST RESULTS/PLOTS	32
APPENDIX SUMMARY	33
APPENDIX A.....	34
APPENDIX B.....	35
APPENDIX C.....	36
APPENDIX D.....	50
APPENDIX E.....	92
APPENDIX F	95
APPENDIX PHOTOGRAPHS.....	98

Report version

Version No.	Date of issue	Description
Rev.00	2022-05-24	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Kids GPS watch
Trade Name:	/
Model No.:	Space 2.0
Adding Model(s):	/
Rated Voltage:	DC3.8V
Battery:	/
Adapter Model:	/
Software Version:	G4CM_EMMC_ZMD_Soymomo_Es_N_D_ 2021.09.01_21.39.00_0901_2228
Hardware Version:	G4C_MB
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results. The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT:	
2G	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.19dBm, GSM1900: 29.65dBm EDGE850: 25.57dBm, EDGE1900: 25.36dBm
Type of Emission:	GSM850: 257KGXW, GSM1900: 246KGXW EDGE850: 241KG7W, EDGE1900: 246KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 0.5dBi; GSM1900: 0.5dBi
GPRS/EDGE Class:	Class 12
3G	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.82dBm, WCDMA Band 5: 22.98dBm
Type of Emission:	WCDMA Band 2: 4M17F9W WCDMA Band 5: 4M17F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 0.5dBi, WCDMA Band 5: 0.5dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

FCC Rules Part 22: Private Land Mobile Radio Services.

FCC Rules Part 24: Public Mobile Services.

TIA/EIA 603 E March 2016: Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services.

KDB 971168 D01 Power Measurement License Digital Systems v03r01: Measurement Guidance for Certification of Licensed Digital Transmitters.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency(MHz)	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2	128
		836.6	190
		848.8	251
PCS 1900	GSM/GPRS/EDGE	1850.2	512
		1880.0	661
		1909.8	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4	4132
		836.6	4183
		846.6	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4	9262
		1880.0	9400
		1907.6	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC Cable	0.6	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	XIAOMI	MDY-08-ES	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
☒ Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
☒ Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21

☐ Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
☐ Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§22.913(a), §24.232(c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b)	Emission Bandwidth	Compliant
§22.917(a), §24.238(a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant
§2.1047	Modulation characteristics	Compliant

N/A: Not applicable.

3. RF Output Power


3.1 Standard Applicable

According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

3.2 Test Procedure

- Conducted output power test method:

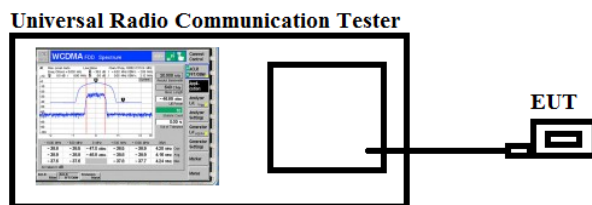

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

3.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	28.41	<38.45	Pass
		H	24.32		
	190	V	28.15		
		H	23.27		
	251	V	28.36		
		H	23.47		
GPRS850	128	V	27.96	<38.45	Pass
		H	23.42		
	190	V	27.93		
		H	23.02		
	251	V	27.46		
		H	23.45		
EGPRS850	128	V	25.32	<38.45	Pass
		H	20.12		
	190	V	25.78		
		H	20.41		
	251	V	25.36		
		H	20.43		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	27.12	<33.00	Pass
		H	21.52		
	661	V	27.36		
		H	21.42		
	810	V	27.36		
		H	21.16		
GPRS1900	512	V	27.21	<33.00	Pass
		H	21.36		
	661	V	27.26		
		H	21.27		
	810	V	27.42		
		H	20.93		
EGPRS1900	512	V	23.13	<33.00	Pass
		H	18.98		
	661	V	23.42		
		H	18.42		
	810	V	23.39		
		H	18.67		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.36	<38.45	Pass
		H	16.12		
	4183	V	20.36		
		H	16.28		
	4233	V	20.48		
		H	15.36		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.39	<33.00	Pass
		H	15.28		
	9400	V	20.41		
		H	15.12		
	9538	V	20.27		
		H	15.71		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

➤ **Max. Conducted Power (Average power)**

Please refer to Appendix A

4. Peak-to-average Ratio (PAR) of Transmitter

4.1 Standard Applicable


According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

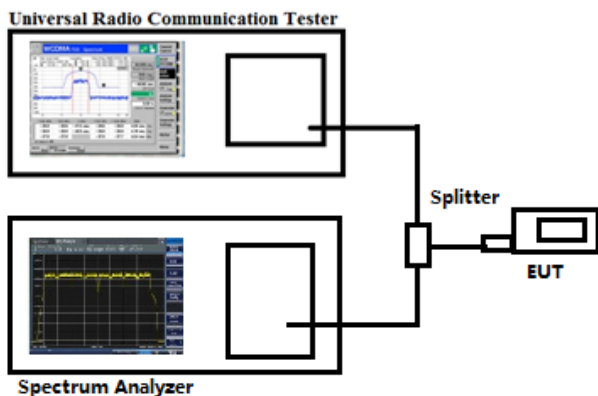

4.3 Summary of Test Results

Please refer to Appendix B.

5. Emission Bandwidth

5.1 Standard Applicable


According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

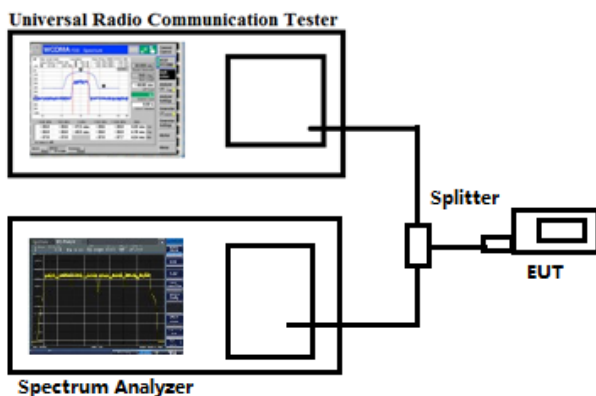

5.3 Summary of Test Results/Plots

Please refer to Appendix C

6. Out of Band Emissions at Antenna Terminal

6.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10^{th} harmonic.

Test Configuration for the out of band emissions testing:

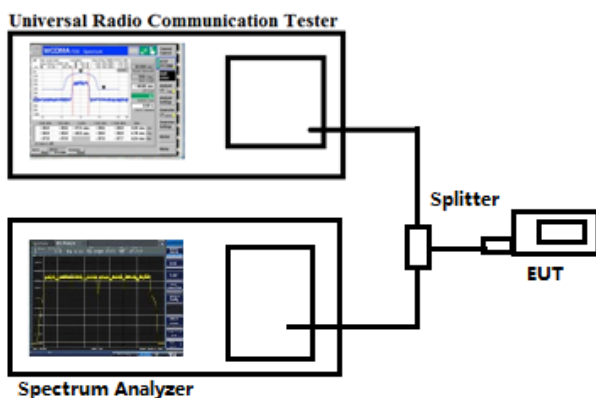

6.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to Appendix D

7. Spurious Radiated Emissions

7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

7.3 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

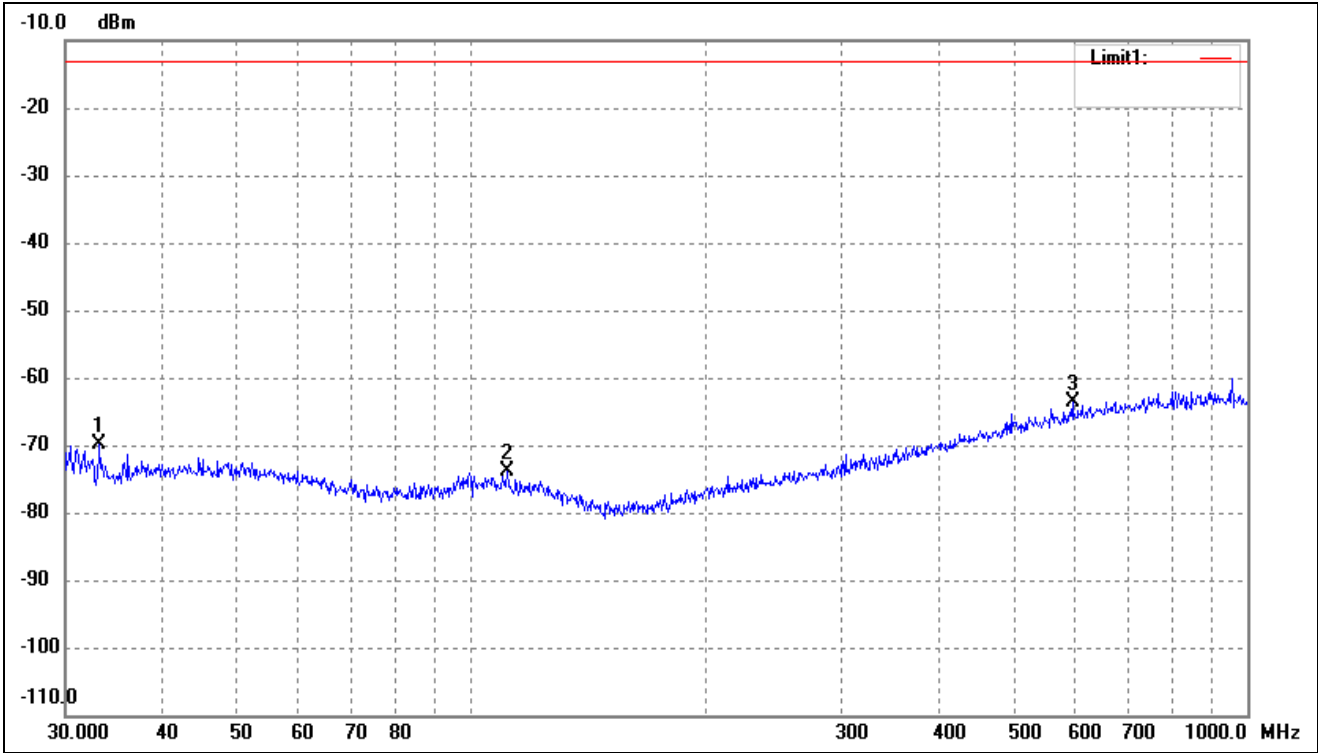


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	-73.03	3.13	-69.90	-13.00	-56.90	-	-	peak
2	111.3468	-76.82	2.83	-73.99	-13.00	-60.99	-	-	peak
3	595.1329	-75.70	12.09	-63.61	-13.00	-50.61	-	-	peak

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

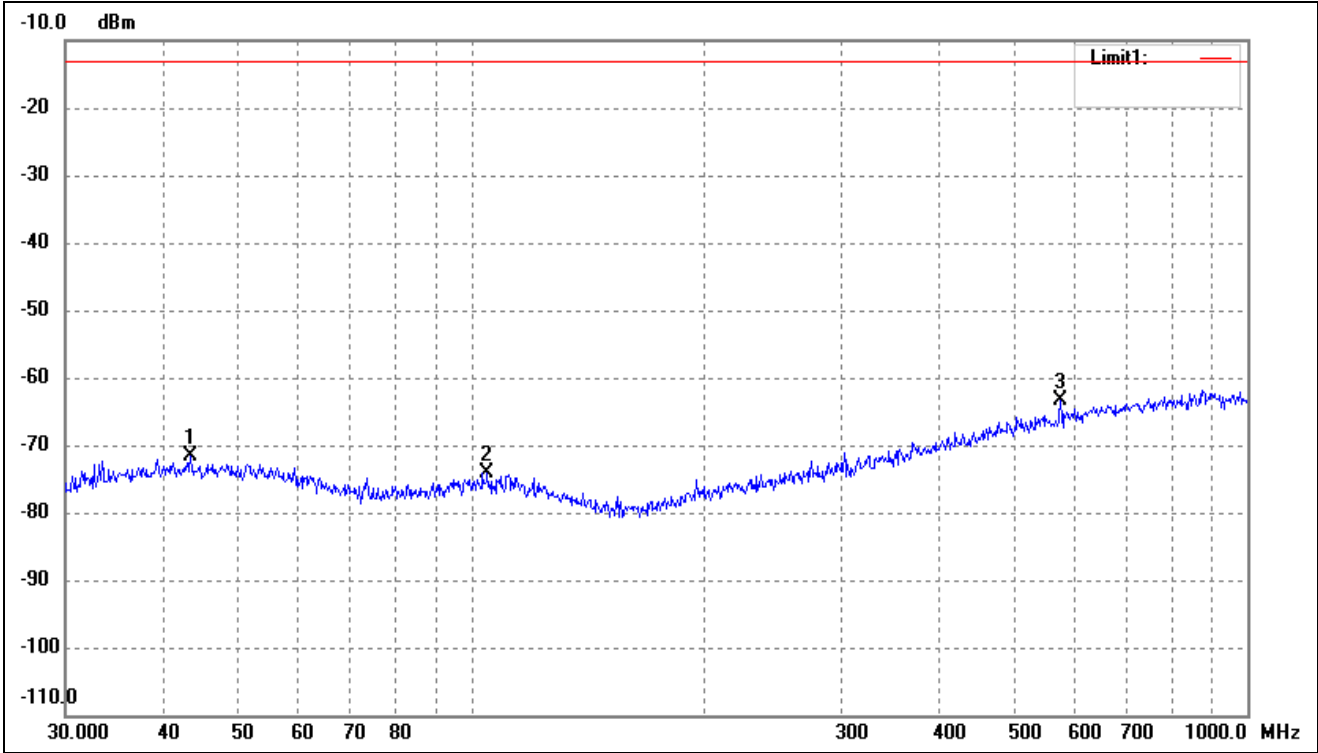


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5057	-76.52	4.81	-71.71	-13.00	-58.71	-	-	peak
2	104.9033	-77.11	3.00	-74.11	-13.00	-61.11	-	-	peak
3	574.6258	-75.06	11.74	-63.32	-13.00	-50.32	-	-	peak

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

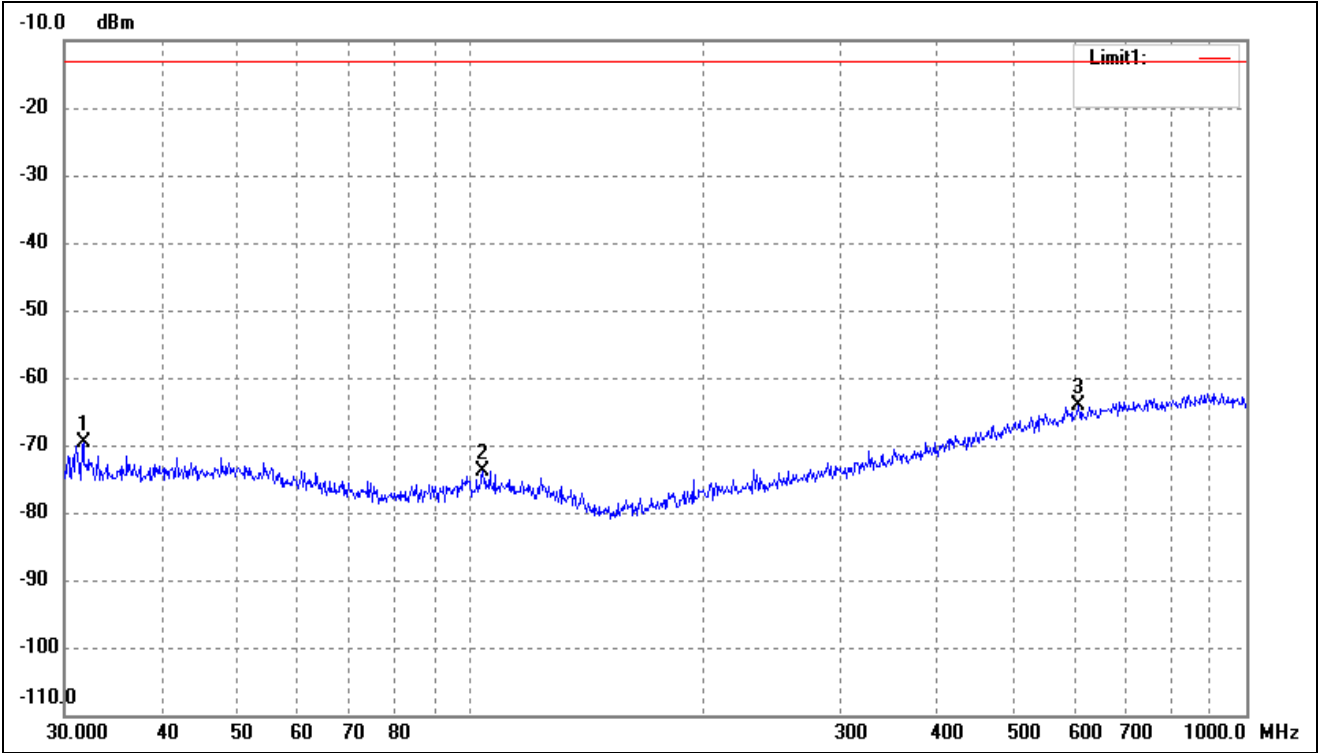

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.7313	-72.28	2.77	-69.51	-13.00	-56.51	-	-	peak
2	103.8055	-76.79	3.01	-73.78	-13.00	-60.78	-	-	peak
3	607.7867	-76.43	12.26	-64.17	-13.00	-51.17	-	-	peak


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

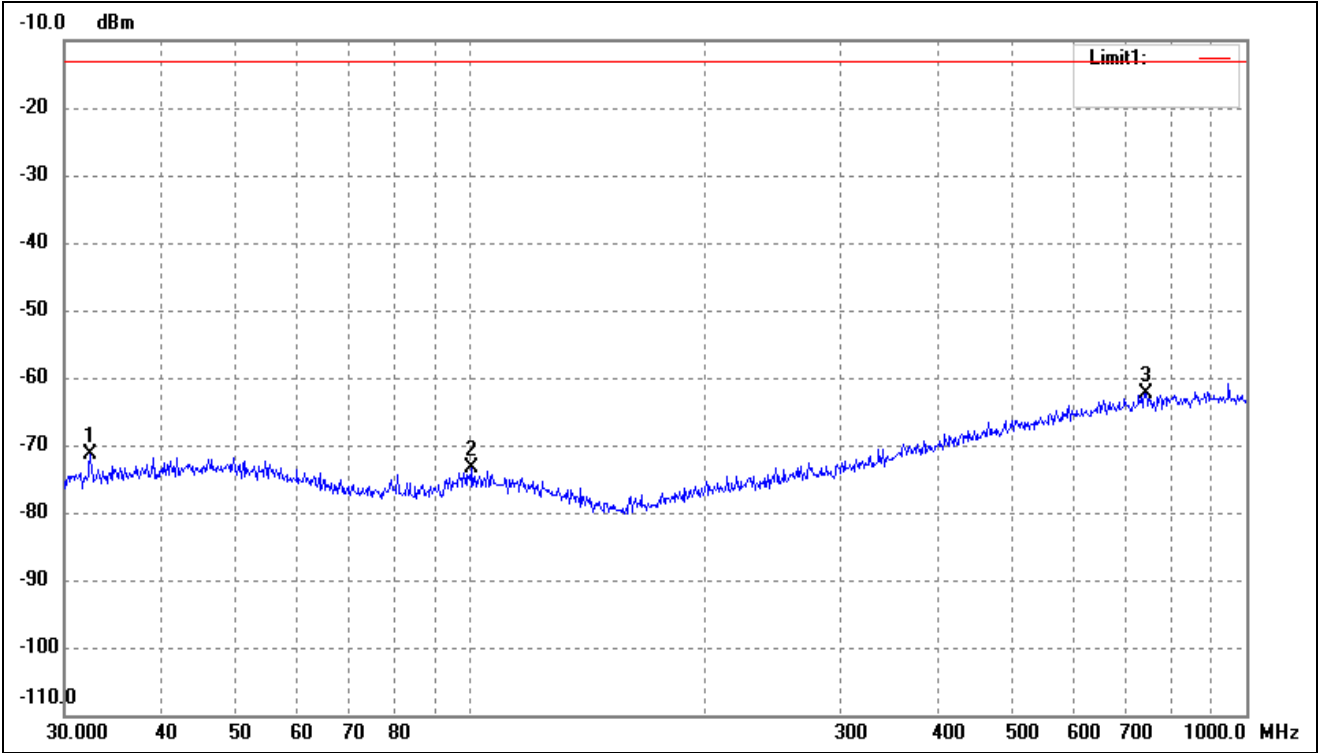

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	-74.35	2.95	-71.40	-13.00	-58.40	-	-	peak
2	100.5806	-76.50	3.07	-73.43	-13.00	-60.43	-	-	peak
3	742.2587	-75.78	13.51	-62.27	-13.00	-49.27	-	-	peak


Note: $\text{Margin} = (\text{Reading} + \text{Correct}) - \text{Limit}$

Test Channel	band 5	Polarity:	Horizontal
--------------	--------	-----------	------------

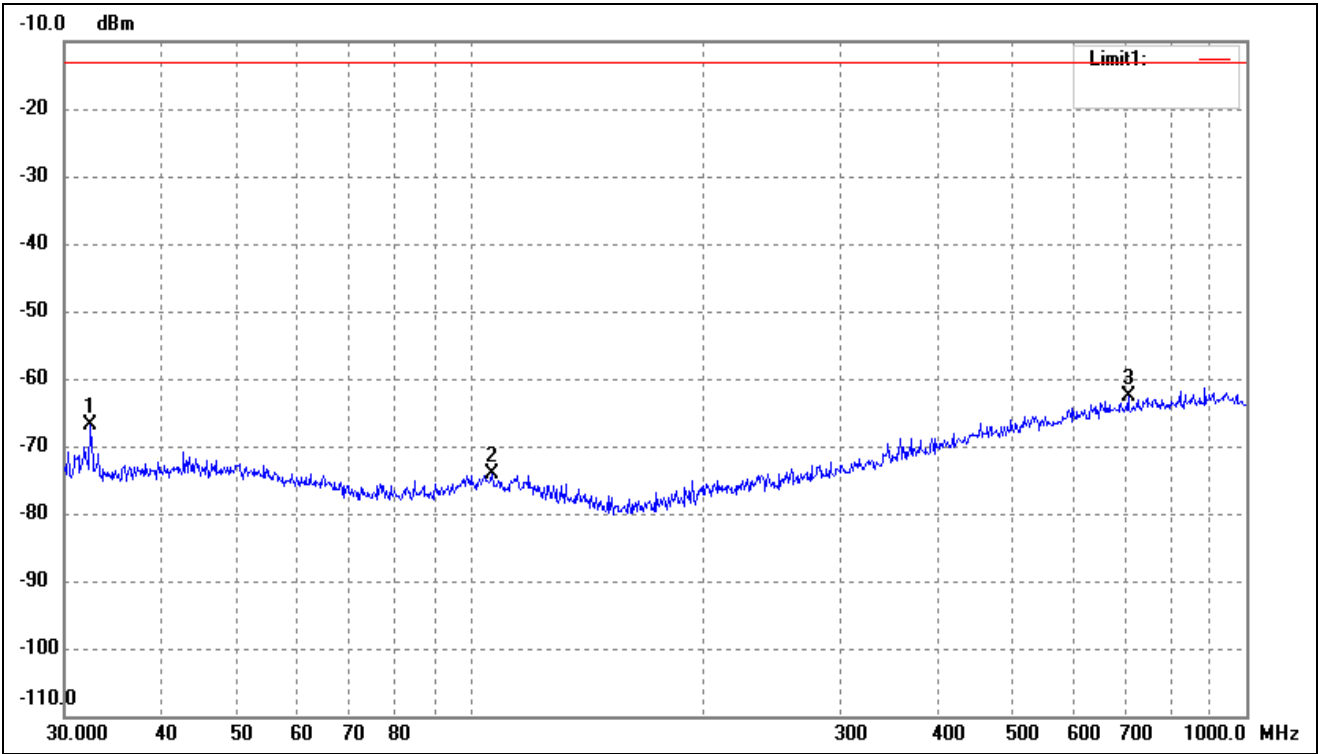


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.4059	-69.93	2.95	-66.98	-13.00	-53.98	-	-	peak
2	106.7587	-77.04	2.97	-74.07	-13.00	-61.07	-	-	peak
3	704.2261	-75.82	13.26	-62.56	-13.00	-49.56	-	-	peak

Test Channel	band 5	Polarity:	Vertical
--------------	--------	-----------	----------

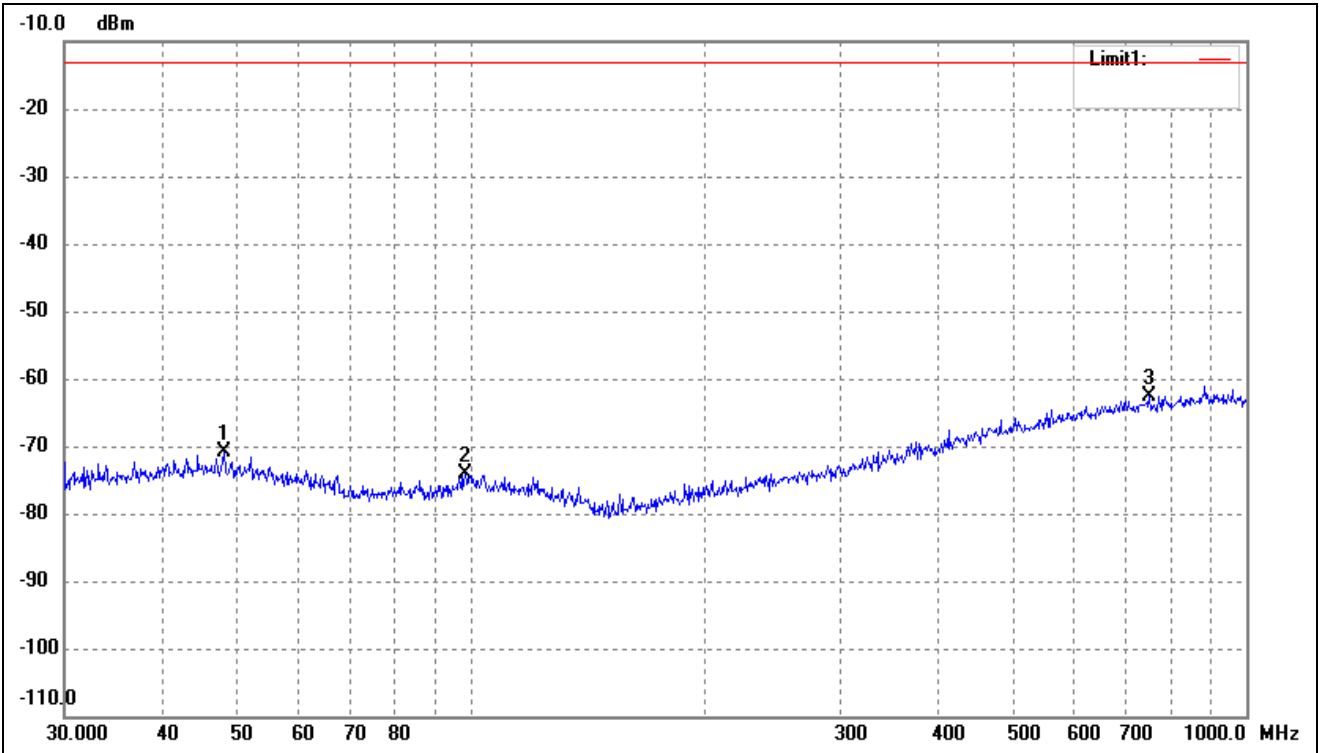


No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.1626	-75.70	4.83	-70.87	-13.00	-57.87	-	-	peak
2	98.4866	-76.86	2.79	-74.07	-13.00	-61.07	-	-	peak
3	750.1083	-76.22	13.56	-62.66	-13.00	-49.66	-	-	peak

Test Channel	band 2	Polarity:	Horizontal
--------------	--------	-----------	------------

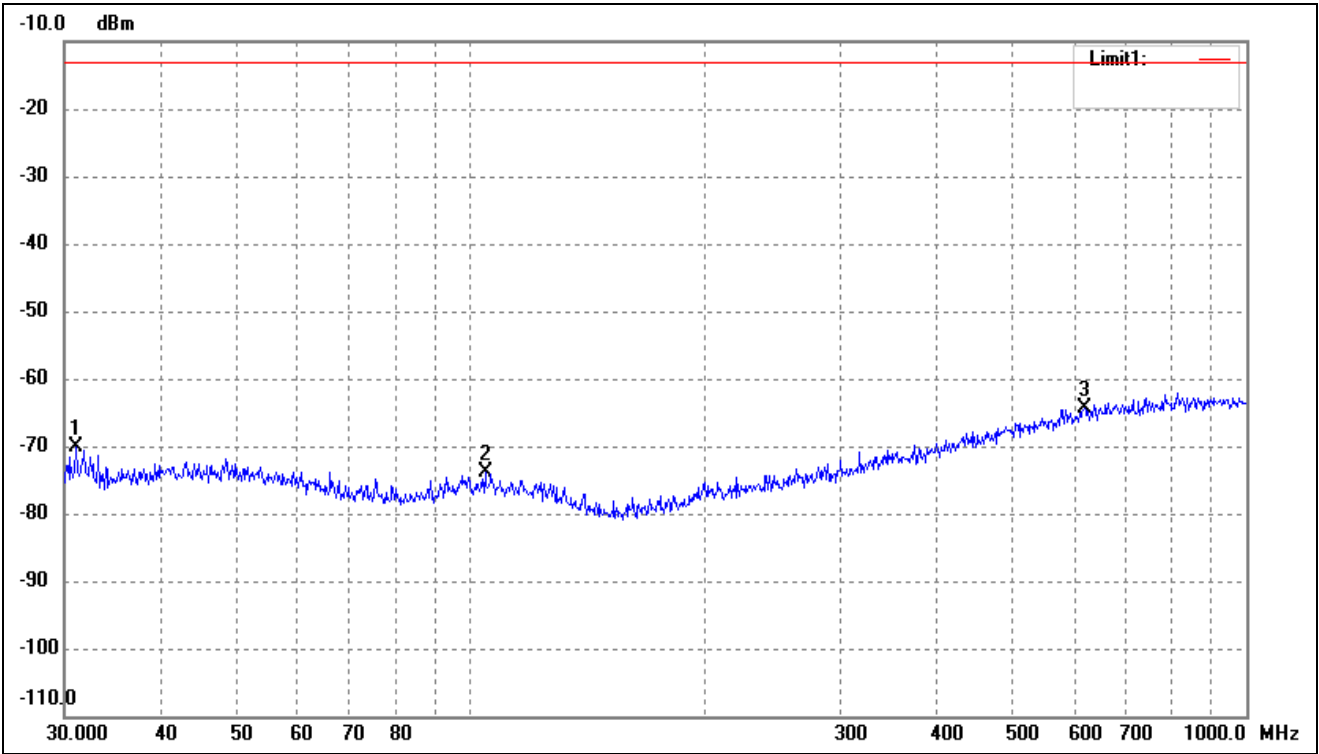

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	()	(cm)	
1	31.0706	-72.69	2.61	-70.08	-13.00	-57.08	-	-	peak
2	104.5361	-76.92	3.01	-73.91	-13.00	-60.91	-	-	peak
3	618.5369	-76.77	12.37	-64.40	-13.00	-51.40	-	-	peak

Test Channel	band 2	Polarity:	Vertical
--------------	--------	-----------	----------

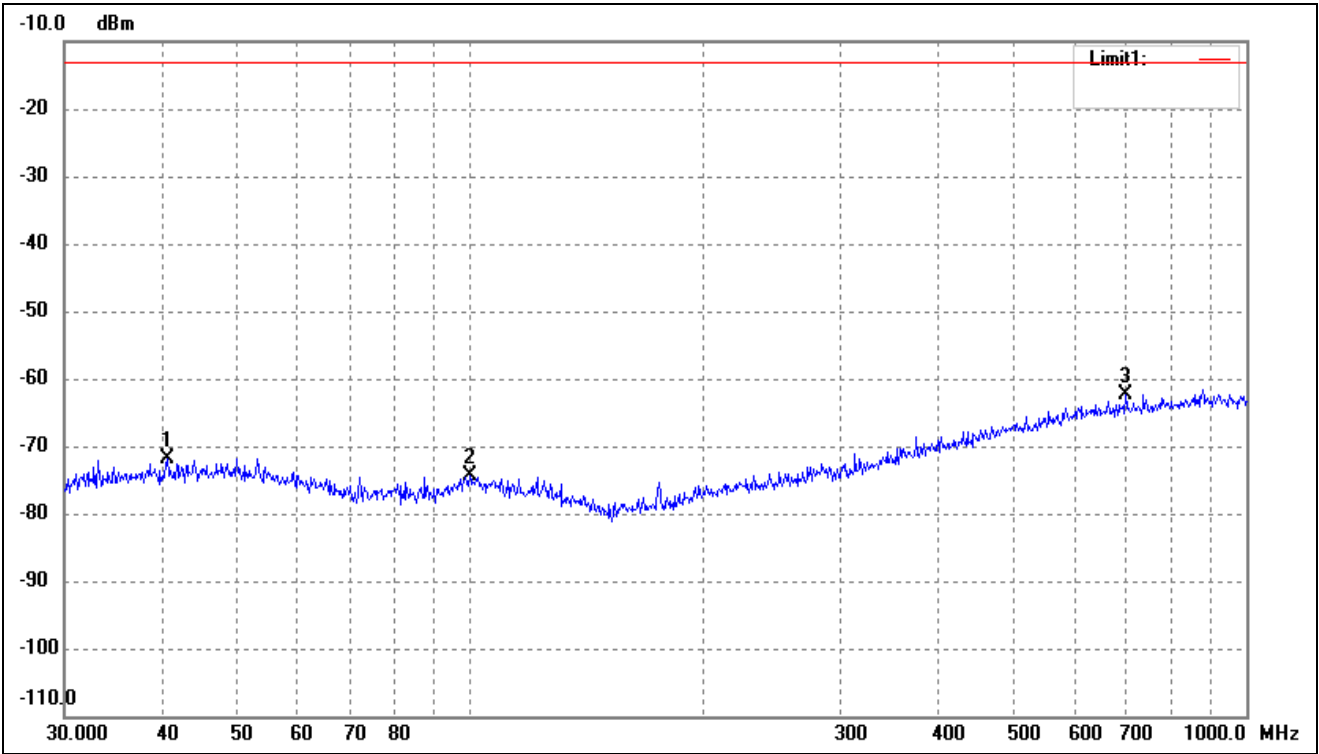

No.	Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.7016	-76.65	4.80	-71.85	-13.00	-58.85	-	-	peak
2	99.8777	-77.35	3.05	-74.30	-13.00	-61.30	-	-	peak
3	699.3046	-75.49	13.22	-62.27	-13.00	-49.27	-	-	peak

Note: $Margin = (Reading + Correct) - Limit$

Remark: ‘-’ Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- For Cellular Band_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-37.99	4.94	-33.05	-13	-20.05	H
2472.6	-41.55	8.46	-33.09	-13	-20.09	H
1648.4	-34.7	4.94	-29.76	-13	-16.76	V
2472.6	-42.72	8.46	-34.26	-13	-21.26	V
Middle Channel (836.6MHz)						
1673.2	-37.47	5.11	-32.36	-13	-19.36	H
2509.8	-43.18	8.54	-34.64	-13	-21.64	H
1673.2	-37.29	5.11	-32.18	-13	-19.18	V
2509.8	-42.52	8.54	-33.98	-13	-20.98	V
High Channel (848.8MHz)						
1697.6	-36.26	5.25	-31.01	-13	-18.01	H
2546.4	-42.35	8.57	-33.78	-13	-20.78	H
1697.6	-36.83	5.25	-31.58	-13	-18.58	V
2546.4	-42.52	8.57	-33.95	-13	-20.95	V

- For PCS Band_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-39.58	10.54	-29.04	-13	-16.04	H
5550.6	-46.23	13.37	-32.86	-13	-19.86	H
3700.4	-40.34	10.54	-29.8	-13	-16.8	V
5550.6	-48.49	13.37	-35.12	-13	-22.12	V
Middle Channel (1880MHz)						
3760.0	-40.7	10.64	-30.06	-13	-17.06	H
5640.0	-46.21	13.54	-32.67	-13	-19.67	H
3760.0	-41.66	10.64	-31.02	-13	-18.02	V
5640.0	-47.73	13.54	-34.19	-13	-21.19	V
High Channel (1909.8MHz)						
3819.6	-40.47	10.74	-29.73	-13	-16.73	H
5729.4	-49.22	13.71	-35.51	-13	-22.51	H
3819.6	-39.12	10.74	-28.38	-13	-15.38	V
5729.4	-48.89	13.71	-35.18	-13	-22.18	V

➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-34.57	4.94	-29.63	-13	-16.63	H
2479.2	-44.77	8.46	-36.31	-13	-23.31	H
1652.8	-35.85	4.94	-30.91	-13	-17.91	V
2479.2	-42.64	8.46	-34.18	-13	-21.18	V
Middle Channel (836.6MHz)						
1672.8	-34.75	5.11	-29.64	-13	-16.64	H
2509.2	-44.52	8.54	-35.98	-13	-22.98	H
1672.8	-36.3	5.11	-31.19	-13	-18.19	V
2509.2	-43.85	8.54	-35.31	-13	-22.31	V
High Channel (846.6MHz)						
1693.2	-36.01	5.25	-30.76	-13	-17.76	H
2539.8	-44.78	8.57	-36.21	-13	-23.21	H
1693.2	-35.74	5.25	-30.49	-13	-17.49	V
2539.8	-43.39	8.57	-34.82	-13	-21.82	V

➤ For WCDMA Band II Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-39.1	10.54	-28.56	-13	-15.56	H
5557.2	-46.14	13.37	-32.77	-13	-19.77	H
3704.8	-40.17	10.54	-29.63	-13	-16.63	V
5557.2	-49.34	13.37	-35.97	-13	-22.97	V
Middle Channel (1880MHz)						
3760.8	-40.13	10.64	-29.49	-13	-16.49	H
5640.0	-46.3	13.54	-32.76	-13	-19.76	H
3760.8	-40.48	10.64	-29.84	-13	-16.84	V
5640.0	-49.74	13.54	-36.2	-13	-23.2	V
High Channel (1907.6MHz)						
3815.2	-39.57	10.74	-28.83	-13	-15.83	H
5722.8	-46.94	13.71	-33.23	-13	-20.23	H
3815.2	-41.4	10.74	-30.66	-13	-17.66	V
5722.8	-49.54	13.71	-35.83	-13	-22.83	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Frequency Stability

8.1 Standard Applicable

According to §22.355, §24.235 the limit is 2.5ppm.

8.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

8.3 Summary of Test Results/Plots

Please refer to Appendix E

9. Modulation characteristics


9.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

9.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

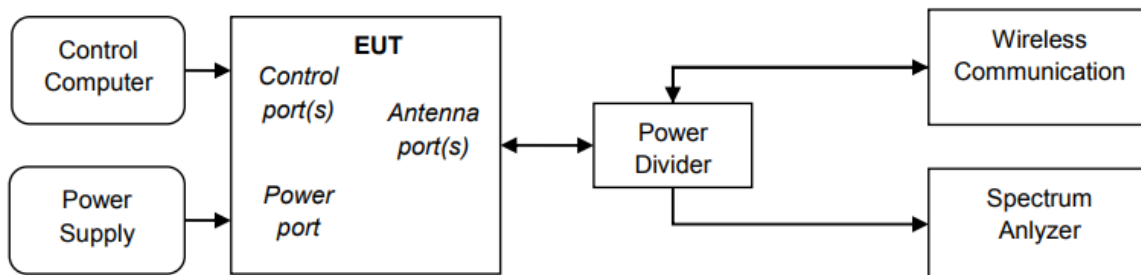

9.3 Summary of Test Results/Plots

Only the worst case was selected to record.

Please refer to Appendix F

APPENDIX SUMMARY

Project No.	WTX22X04067195W	Test Engineer	Dashan
Start date	2022/05/01	Finish date	2022/05/13
Temperature	24.6℃	Humidity	46%
RF specifications	GSM/WCDMA		

APPENDIX	Description of Test Item	Result
A	RF Output Power	Compliant
B	Peak-to-average Ratio (PAR) of Transmitter	Compliant
C	Emission Bandwidth	Compliant
D	Out of Band Emissions at Antenna Terminal	Compliant
E	Frequency Stability	Compliant
F	Modulation characteristics	Compliant

APPENDIX A**Conducted Average power**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	32.82	33.01	33.19	29.34	29.47	29.57
GPRS(1Slot)	32.80	33.03	33.14	29.41	29.52	29.65
EGPRS(1Slot)	25.34	25.57	25.41	24.21	25.36	24.89

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	22.98	22.96	22.91	22.64	22.71	22.82
HSDPA Subtest-1	22.29	22.61	22.34	21.49	21.92	22.17
HSDPA Subtest-2	22.24	22.57	22.31	21.43	21.91	22.13
HSDPA Subtest-3	22.28	22.56	22.32	21.44	21.89	22.15
HSDPA Subtest-4	22.26	22.55	22.30	21.46	21.87	22.14
HSUPA Subtest-1	22.40	22.67	22.33	21.51	21.85	22.12
HSUPA Subtest-2	22.38	22.63	22.30	21.47	21.82	22.09
HSUPA Subtest-3	22.34	22.64	22.29	21.45	21.83	22.08
HSUPA Subtest-4	22.36	22.65	22.27	21.43	21.81	22.07
HSUPA Subtest-5	22.37	22.65	22.26	21.47	21.82	22.11

APPENDIX B

Peak-to-average Ratio (PAR) of Transmitter

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	5.62	13
GPRS(1 Slot)	661	1850.2	5.87	13
EDGE(1 Slot)	661	1850.2	5.43	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	5.69	13
	9400	1880.0	5.47	13
	9538	1907.6	5.13	13




Note: Only the worst case was selected to record.




APPENDIX C




EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	246.1533	320.048
	190	836.60	248.2134	319.986
	251	848.80	257.4665	321.193
GPRS850 (GMSK,1Slot)	128	824.20	244.0472	316.196
	190	836.60	244.3469	319.229
	251	848.80	244.4517	322.501
EGPRS850 (8PSK,1Slot)	128	824.20	239.7676	300.123
	190	836.60	241.0347	307.095
	251	848.80	241.2002	313.618
PCS1900 (GMSK)	512	1850.20	242.6364	316.452
	661	1880.00	242.8097	311.651
	810	1909.80	243.4362	315.341
GPRS1900 (GMSK,1Slot)	512	1850.20	245.8246	316.329
	661	1880.00	242.9200	312.439
	810	1909.80	243.3543	322.573
EGPRS1900 (8PSK,1Slot)	512	1850.20	239.2016	300.941
	661	1880.00	244.6364	309.000
	810	1909.80	246.2878	310.328

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4143.4	4678
	4183	836.60	4167.8	4708
	4233	846.60	4162.3	4707
HSDPA	4132	826.40	4148.1	4690
	4183	836.60	4163.4	4663
	4233	846.60	4158.0	4675
HSUPA	4132	826.40	4133.7	4677
	4183	836.60	4172.8	4692
	4233	846.60	4150.0	4689
WCDMA Band II	9262	1852.40	4150.6	4697
	9400	1880.00	4159.9	4697
	9538	1907.60	4152.5	4693
HSDPA	9262	1852.40	4176.2	4693
	9400	1880.00	4168.6	4684
	9538	1907.60	4154.4	4679
HSUPA	9262	1852.40	4143.5	4661
	9400	1880.00	4163.6	4709
	9538	1907.60	4154.0	4703

GSM 850 (GMSK)-Low	Agilent Ch Freq 824.2 MHz Occupied Bandwidth Center 824.200000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 824.2 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Span 1 MHz Occupied Bandwidth 246.1533 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.494 kHz x dB Bandwidth 320.048 kHz Freq/Channel Center Freq 824.200000 MHz Start Freq 823.700000 MHz Stop Freq 824.700000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
GSM 850 (GMSK)-Middle	Agilent Ch Freq 836.6 MHz Occupied Bandwidth Center 836.600000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 836.6 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Span 1 MHz Occupied Bandwidth 248.2134 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 220.764 Hz x dB Bandwidth 319.986 kHz Freq/Channel Center Freq 836.600000 MHz Start Freq 836.100000 MHz Stop Freq 837.100000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
GSM 850 (GMSK)-High	Agilent Ch Freq 848.8 MHz Occupied Bandwidth Center 848.800000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offset 5 dB Center 848.8 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Span 1 MHz Occupied Bandwidth 257.4665 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -851.390 Hz x dB Bandwidth 321.193 kHz Freq/Channel Center Freq 848.800000 MHz Start Freq 848.300000 MHz Stop Freq 849.300000 MHz CF Step 100.000000 kHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

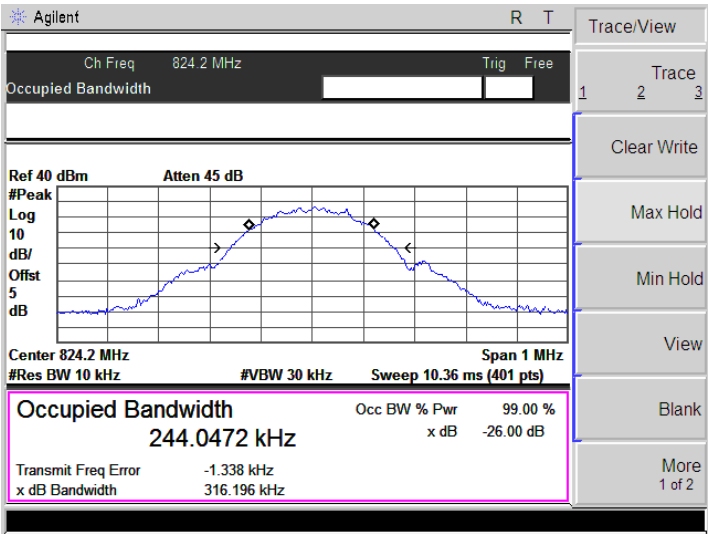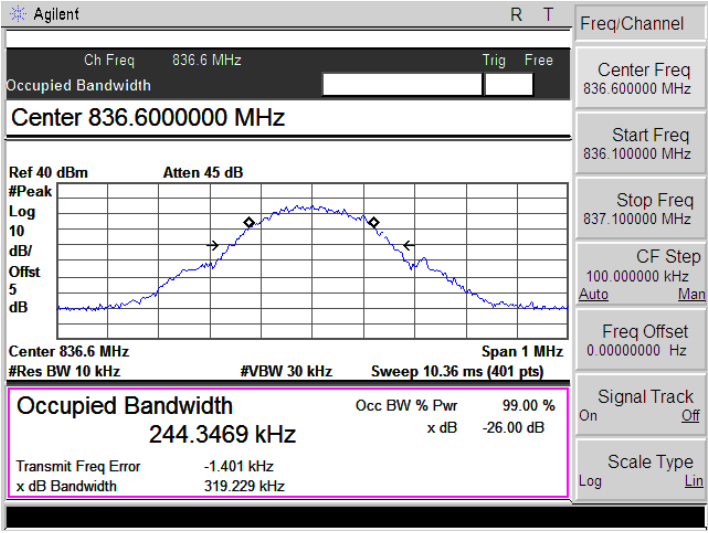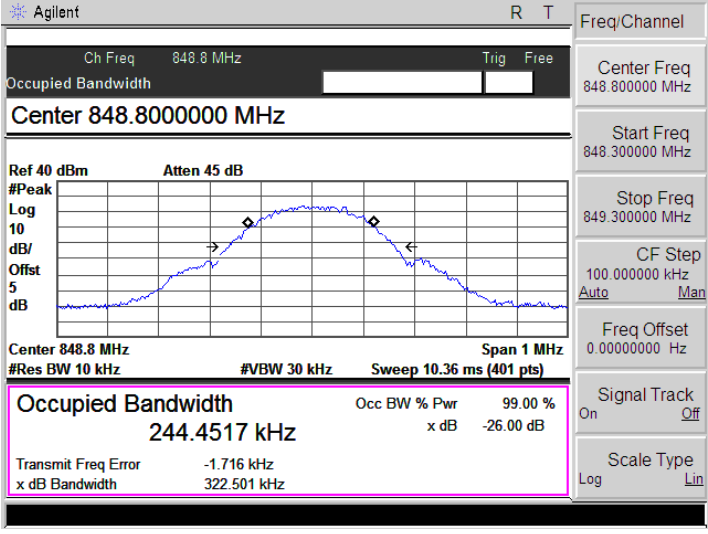GPRS850 (GMSK,1Slot)-Low	
GPRS850 (GMSK,1Slot)-Middle	
GPRS850 (GMSK,1Slot)-High	

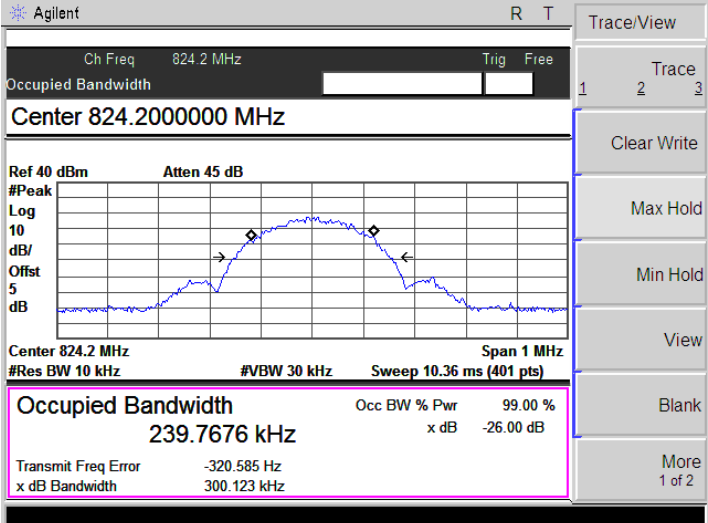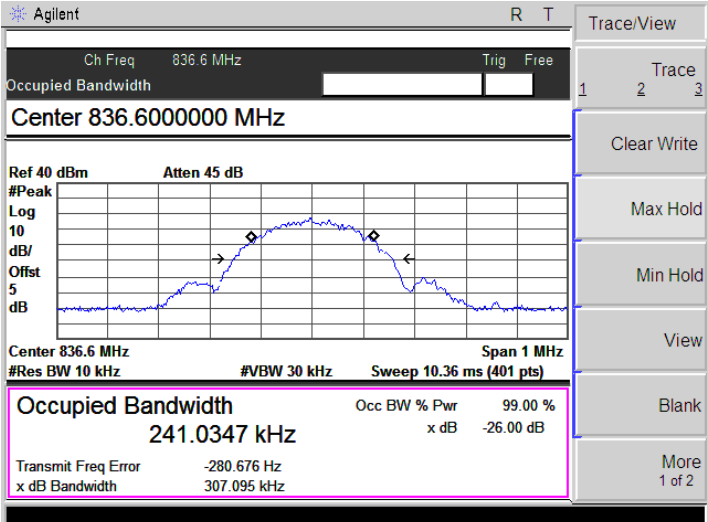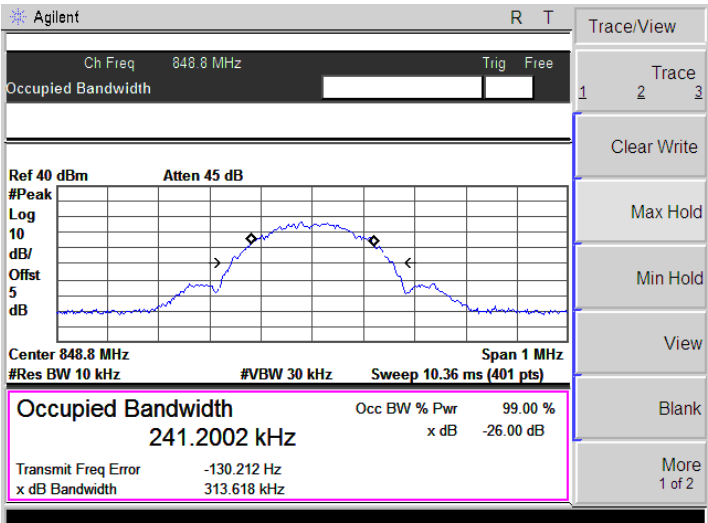EGPRS850 (8PSK,1Slot)-Low	 Agilent R T Ch Freq 824.2 MHz Trig Free Occupied Bandwidth Center 824.200000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 824.2 MHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth 239.7676 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -320.585 Hz x dB Bandwidth 300.123 kHz
EGPRS850 (8PSK,1Slot)-Middle	 Agilent R T Ch Freq 836.6 MHz Trig Free Occupied Bandwidth Center 836.600000 MHz Ref 40 dBm Atten 45 dB #Peak Log 10 dB/ Offst 5 dB Center 836.6 MHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth 241.0347 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -280.676 Hz x dB Bandwidth 307.095 kHz
EGPRS850 (8PSK,1Slot)-High	 Agilent R T Ch Freq 848.8 MHz Trig Free Occupied Bandwidth Center 848.8 MHz Span 1 MHz #Res BW 10 kHz #VBW 30 kHz Sweep 10.36 ms (401 pts) Occupied Bandwidth 241.2002 kHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -130.212 Hz x dB Bandwidth 313.618 kHz

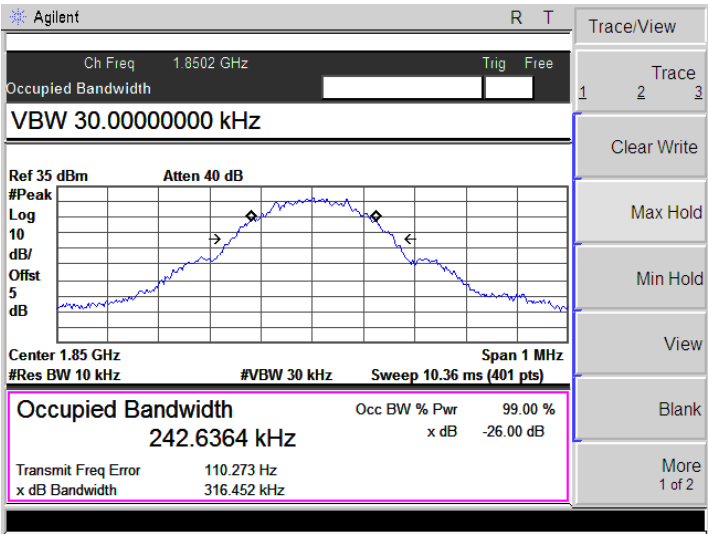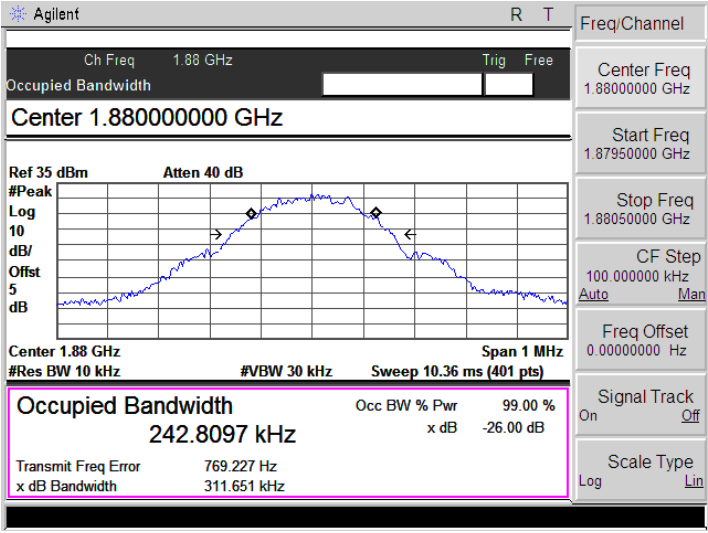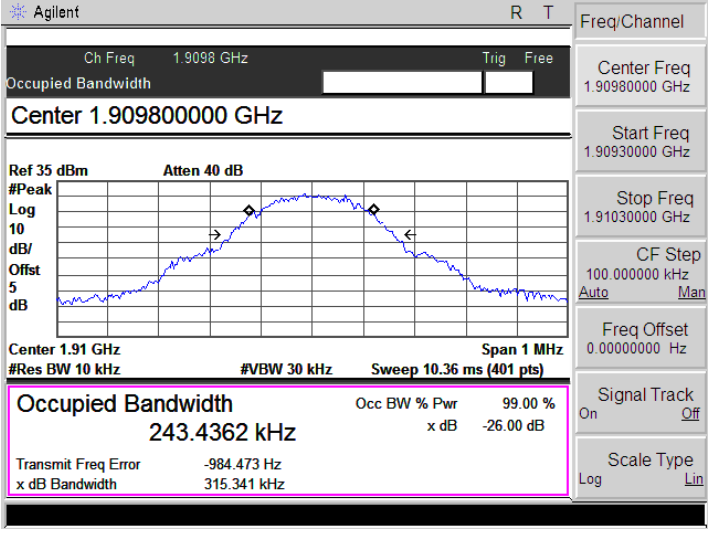PCS1900 (GMSK)-Low	
PCS1900 (GMSK)-Middle	
PCS1900 (GMSK)-High	

The figure consists of three vertically stacked screenshots of an Agilent spectrum analyzer, each showing a different frequency range for GPRS1900 signals. Each screenshot includes a main plot area, a table of occupied bandwidth, and a list of parameters on the right side.

Screenshot 1: GPRS1900 (GMSK,1Slot)-Low




- Center Freq:** 1.85020000 GHz
- Occupied Bandwidth:** 245.8246 kHz
- Transmit Freq Error:** -1.793 kHz
- x dB Bandwidth:** 316.329 kHz
- Parameters:**
 - Center Freq: 1.85020000 GHz
 - Start Freq: 1.84970000 GHz
 - Stop Freq: 1.85070000 GHz
 - CF Step: 100.000000 kHz
 - Freq Offset: 0.00000000 Hz
 - Signal Track: On
 - Scale Type: Log

Screenshot 2: GPRS1900 (GMSK,1Slot)-Middle

- Center Freq:** 1.88000000 GHz
- Occupied Bandwidth:** 242.9200 kHz
- Transmit Freq Error:** -585.573 Hz
- x dB Bandwidth:** 312.439 kHz
- Parameters:**
 - Center Freq: 1.88000000 GHz
 - Start Freq: 1.87950000 GHz
 - Stop Freq: 1.88050000 GHz
 - CF Step: 100.000000 kHz
 - Freq Offset: 0.00000000 Hz
 - Signal Track: On
 - Scale Type: Log

Screenshot 3: GPRS1900 (GMSK,1Slot)-High

- Center Freq:** 1.90980000 GHz
- Occupied Bandwidth:** 243.3543 kHz
- Transmit Freq Error:** 201.626 Hz
- x dB Bandwidth:** 322.573 kHz
- Parameters:**
 - Center Freq: 1.90980000 GHz
 - Start Freq: 1.90930000 GHz
 - Stop Freq: 1.91030000 GHz
 - CF Step: 100.000000 kHz
 - Freq Offset: 0.00000000 Hz
 - Signal Track: On
 - Scale Type: Log

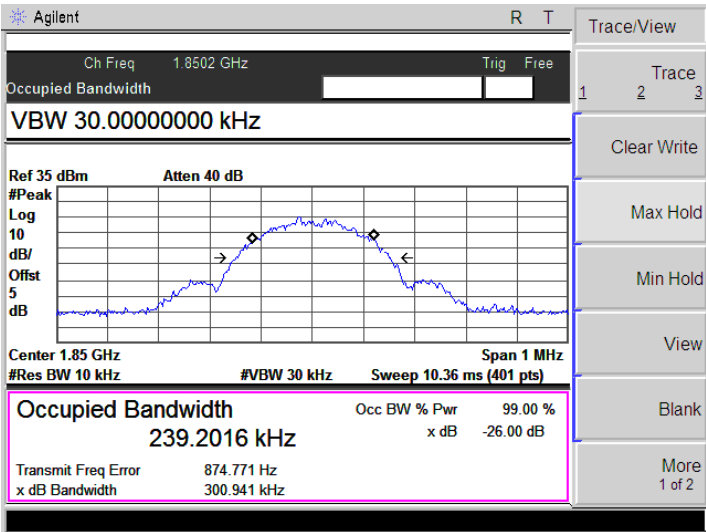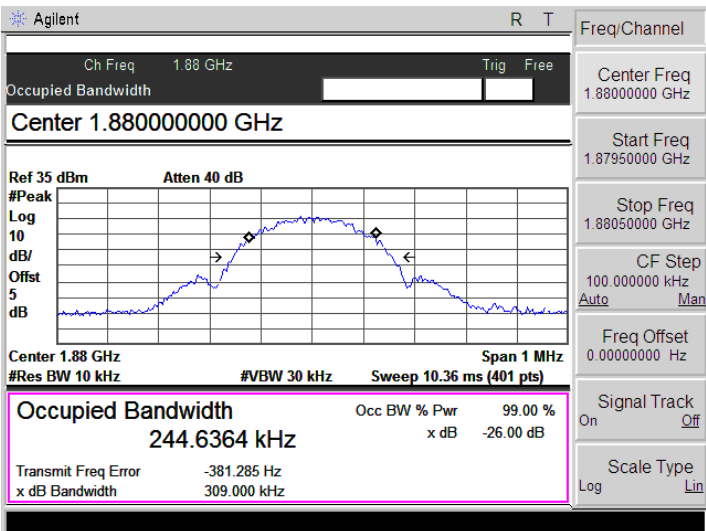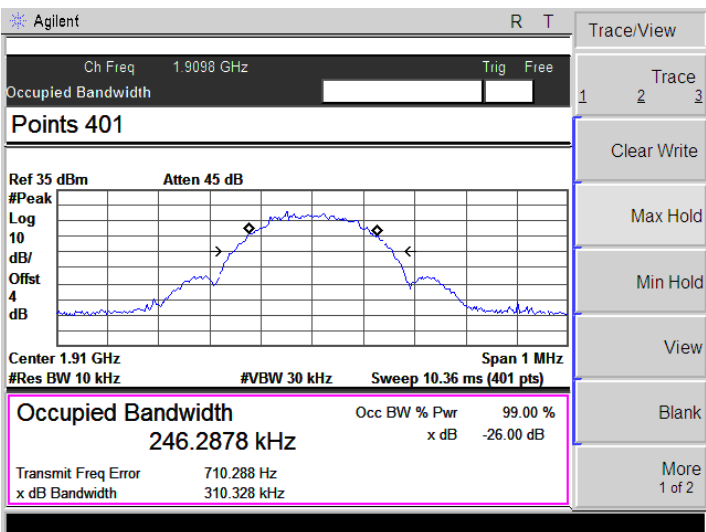EGPRS1900 (8PSK,1Slot)-Low	
EGPRS1900 (8PSK,1Slot)-Middle	
EGPRS1900 (8PSK,1Slot)-High	

WCDMA Band V-Low	Agilent Ch Freq 826.4 MHz Occupied Bandwidth Center 826.400000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 826.4 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1434 MHz Transmit Freq Error 4.670 kHz x dB Bandwidth 4.678 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 826.400000 MHz Start Freq 821.400000 MHz Stop Freq 831.400000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
WCDMA Band V-Middle	Agilent Ch Freq 836.6 MHz Occupied Bandwidth Center 836.600000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 836.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1678 MHz Transmit Freq Error 984.079 Hz x dB Bandwidth 4.708 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Trace/View 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
WCDMA Band V-High	Agilent Ch Freq 846.6 MHz Occupied Bandwidth Center 846.600000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 846.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 4.1623 MHz Transmit Freq Error -11.825 kHz x dB Bandwidth 4.707 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Freq/Channel Center Freq 846.600000 MHz Start Freq 841.600000 MHz Stop Freq 851.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

HSDPA-Low	Agilent Ch Freq826.4 MHz TrigFree Occupied Bandwidth Center 826.400000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 826.4 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1481 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 786.350 Hz x dB Bandwidth 4.690 MHz Freq/Channel Center Freq826.400000 MHz Start Freq821.400000 MHz Stop Freq831.400000 MHz CF Step1.00000000 MHz AutoMan Freq Offset0.00000000 Hz Signal TrackOnOff Scale TypeLogLin
HSDPA-Middle	Agilent Ch Freq836.6 MHz TrigFree Occupied Bandwidth Center 836.600000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 836.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1634 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -4.376 kHz x dB Bandwidth 4.663 MHz Trace/View Trace123 Clear Write Max Hold Min Hold View Blank More1 of 2
HSDPA-High	Agilent Ch Freq846.6 MHz TrigFree Occupied Bandwidth Center 846.600000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 846.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1580 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -19.741 kHz x dB Bandwidth 4.675 MHz Freq/Channel Center Freq846.600000 MHz Start Freq841.600000 MHz Stop Freq851.600000 MHz CF Step1.00000000 MHz AutoMan Freq Offset0.00000000 Hz Signal TrackOnOff Scale TypeLogLin

HSUPA-Low	Agilent R T Ch Freq 826.4 MHz Trig Free Occupied Bandwidth Center 826.400000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 826.4 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1337 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 7.101 kHz x dB Bandwidth 4.677 MHz Freq/Channel Center Freq 826.400000 MHz Start Freq 821.400000 MHz Stop Freq 831.400000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-Middle	Agilent R T Ch Freq 836.6 MHz Trig Free Occupied Bandwidth Center 836.600000 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 836.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1728 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -9.692 kHz x dB Bandwidth 4.692 MHz Freq/Channel Center Freq 836.600000 MHz Start Freq 831.600000 MHz Stop Freq 841.600000 MHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-High	Agilent R T Ch Freq 846.6 MHz Trig Free Occupied Bandwidth Center 846.6 MHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 846.6 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1500 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -9.418 kHz x dB Bandwidth 4.689 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

WCDMA Band II-Low	Agilent Ch Freq 1.8524 GHz Occupied Bandwidth Averages: 10 Trig Free Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.852 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1506 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 2.536 kHz x dB Bandwidth 4.697 MHz Display Full Screen Display Line -13.00 dBm On Off Limits Active Fctn Position Bottom Title Preferences
WCDMA Band II-Middle	Agilent Ch Freq 1.88 GHz Occupied Bandwidth Averages: 10 Trig Free Center 1.880000000 GHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1599 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -6.212 kHz x dB Bandwidth 4.697 MHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
WCDMA Band II-High	Agilent Ch Freq 1.9076 GHz Occupied Bandwidth Averages: 10 Trig Free Center 1.907600000 GHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.908 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1525 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -4.231 kHz x dB Bandwidth 4.693 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2



HSDPA-Low	Agilent R T Ch Freq 1.8524 GHz Trig Free Occupied Bandwidth Averages: 10 Center 1.852400000 GHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.852 GHz Span 10 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth Occ BW % Pwr 99.00 % 4.1762 MHz x dB -26.00 dB Transmit Freq Error 1.872 kHz x dB Bandwidth 4.693 MHz Freq/Channel Center Freq 1.85240000 GHz Start Freq 1.84740000 GHz Stop Freq 1.85740000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
-----------	---

HSUPA-Low	Agilent R T Ch Freq 1.8524 GHz Trig Free Occupied Bandwidth Averages: 10 Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.852 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1435 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -5.035 kHz x dB Bandwidth 4.661 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
HSUPA-Middle	Agilent R T Ch Freq 1.88 GHz Trig Free Occupied Bandwidth Averages: 10 Center 1.880000000 GHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.88 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1636 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -7.468 kHz x dB Bandwidth 4.709 MHz Freq/Channel Center Freq 1.88000000 GHz Start Freq 1.87500000 GHz Stop Freq 1.88500000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
HSUPA-High	Agilent R T Ch Freq 1.9076 GHz Trig Free Occupied Bandwidth Averages: 10 Center 1.907600000 GHz Ref 35 dBm Atten 40 dB #Peak Log 10 dB/ Offst 5 dB Center 1.908 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Span 10 MHz Occupied Bandwidth 4.1540 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error -1.988 kHz x dB Bandwidth 4.703 MHz Freq/Channel Center Freq 1.90760000 GHz Start Freq 1.90260000 GHz Stop Freq 1.91260000 GHz CF Step 1.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin



APPENDIX D

Out of Band Emissions at Antenna Terminal


GSM 850
(GMSK)-Low

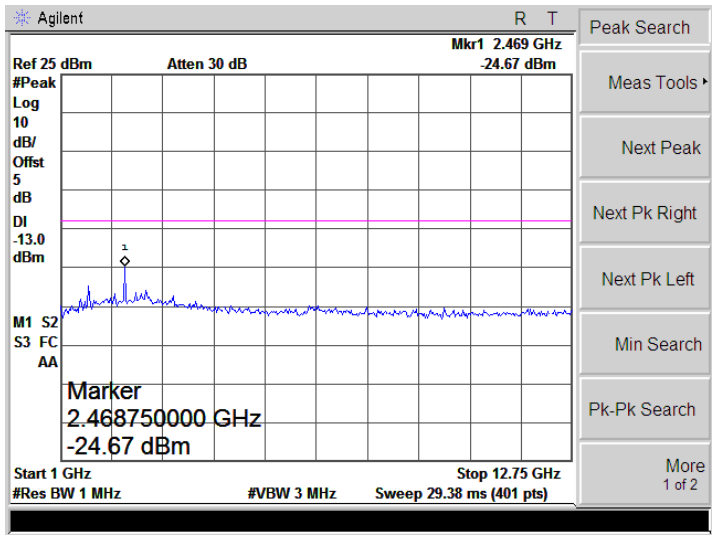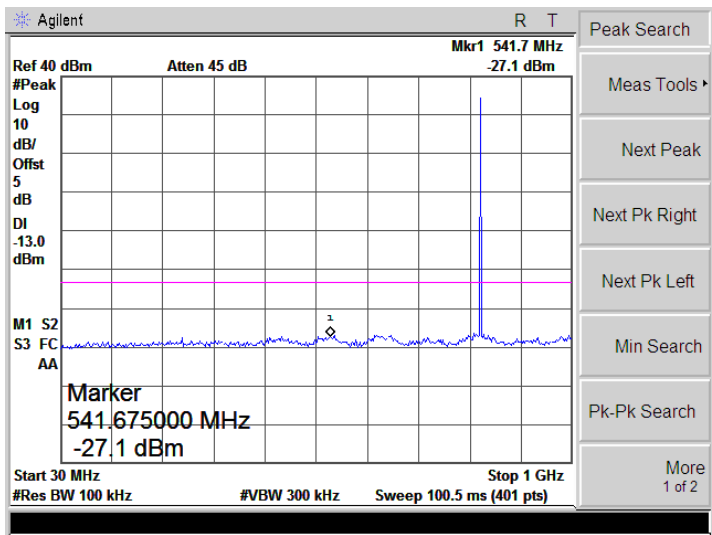


GSM 850
(GMSK)-Middle

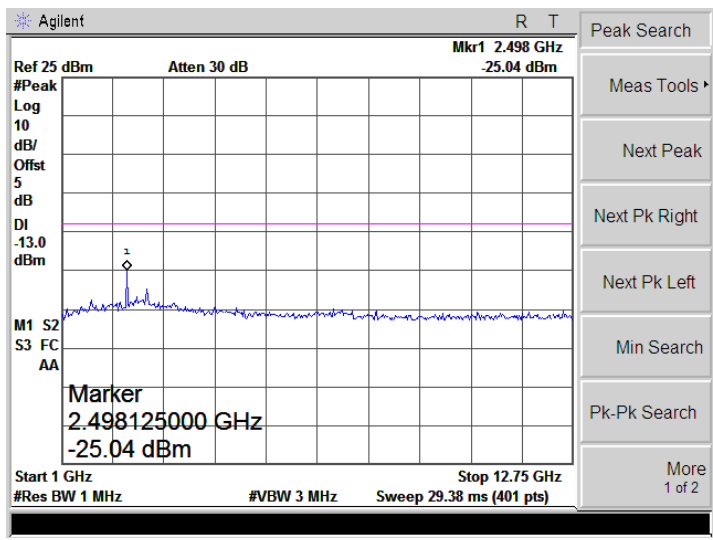
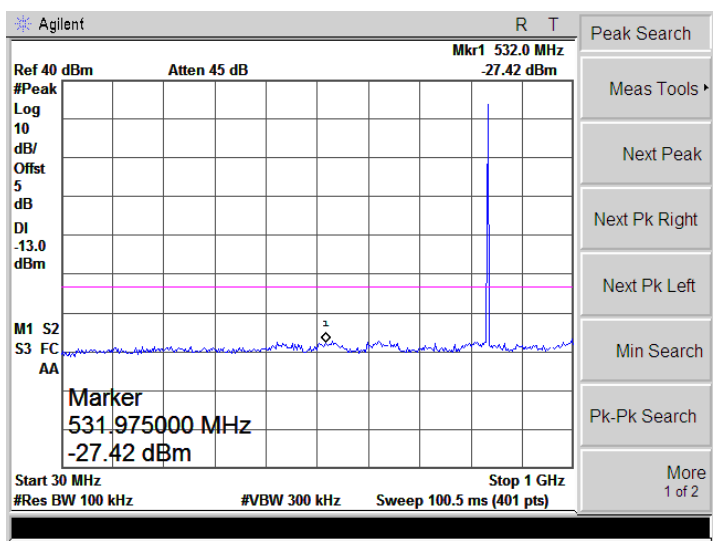


GSM 850
(GMSK)-High

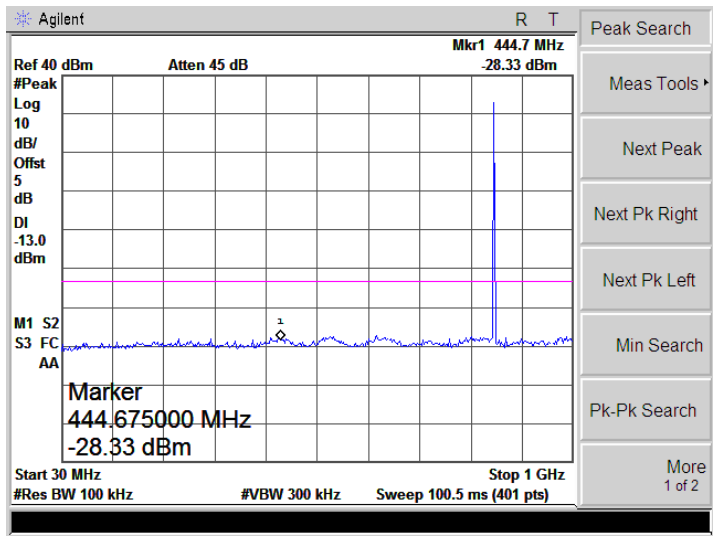


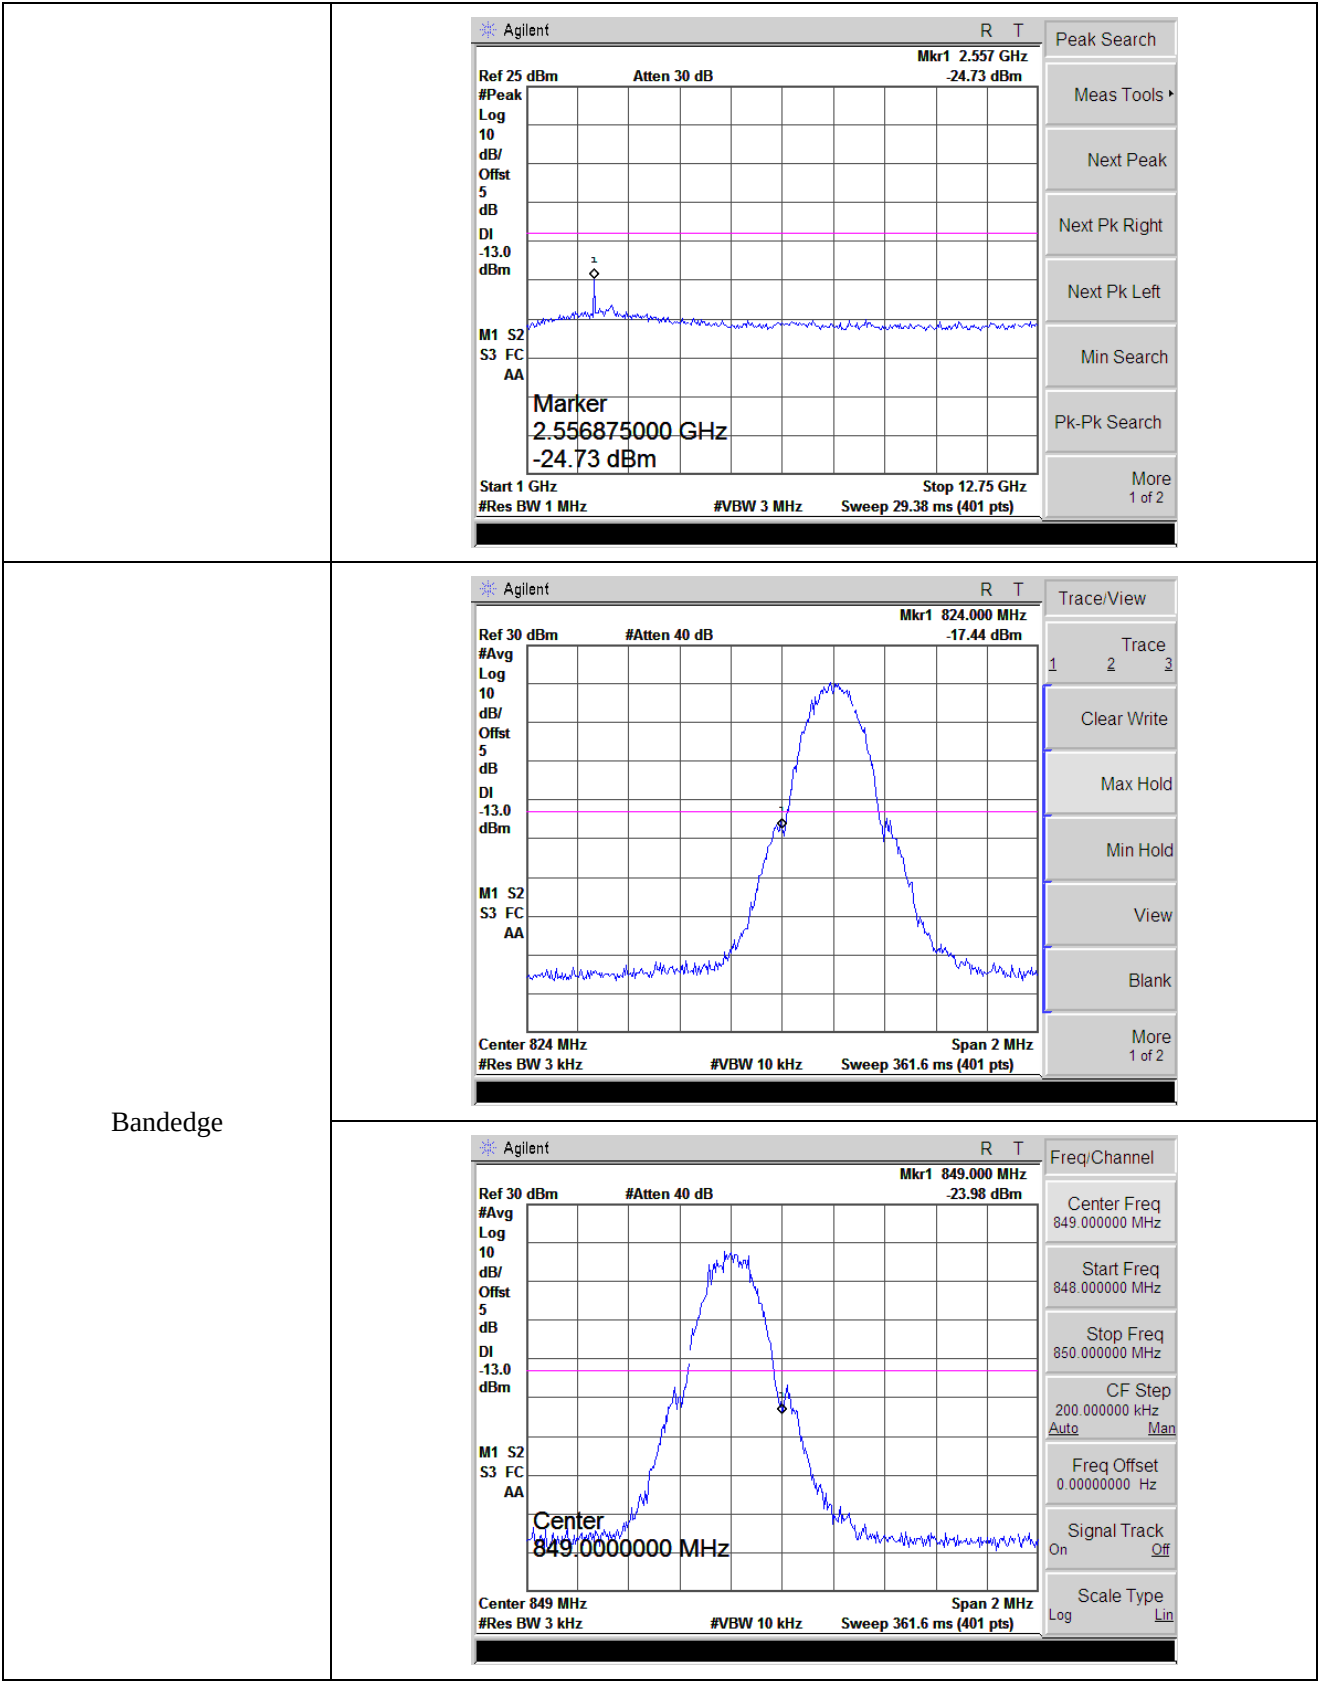


GPRS850
(GMSK,1Slot)-Low

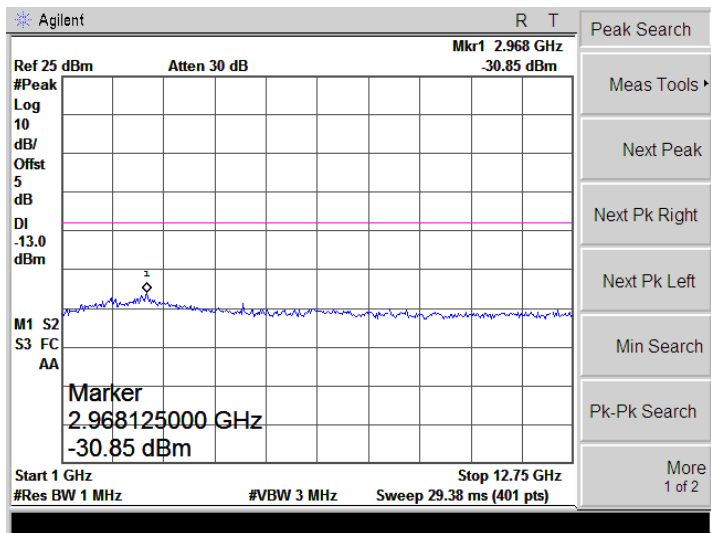
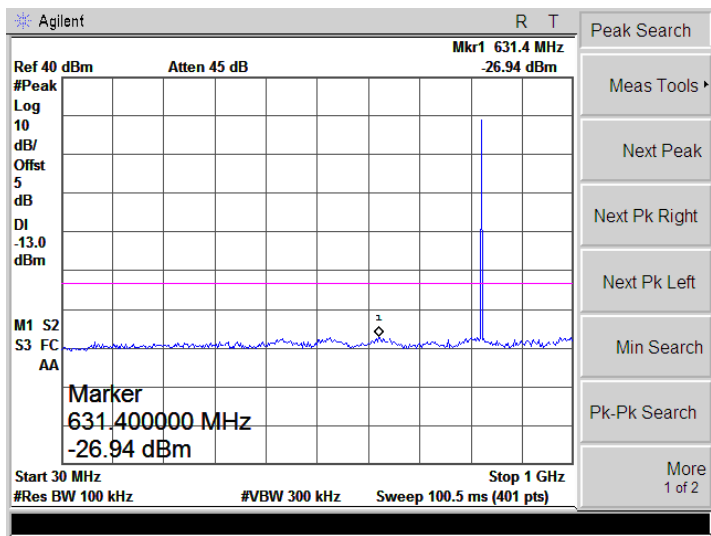


GPRS850
(GMSK,1Slot)-Middle


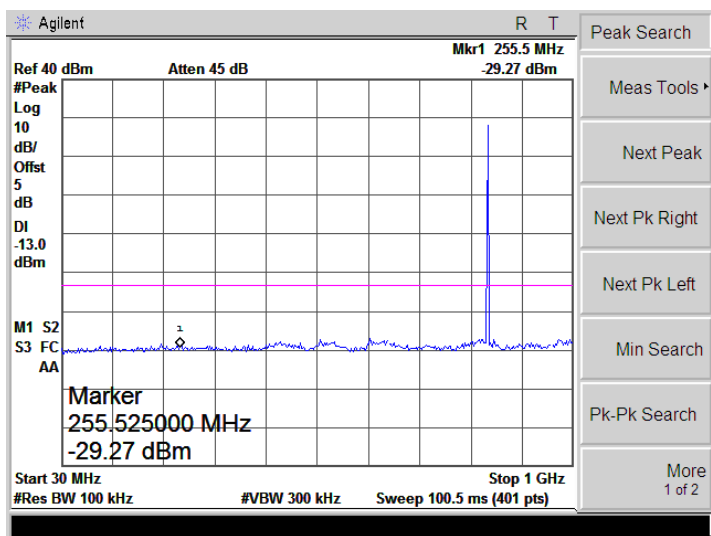


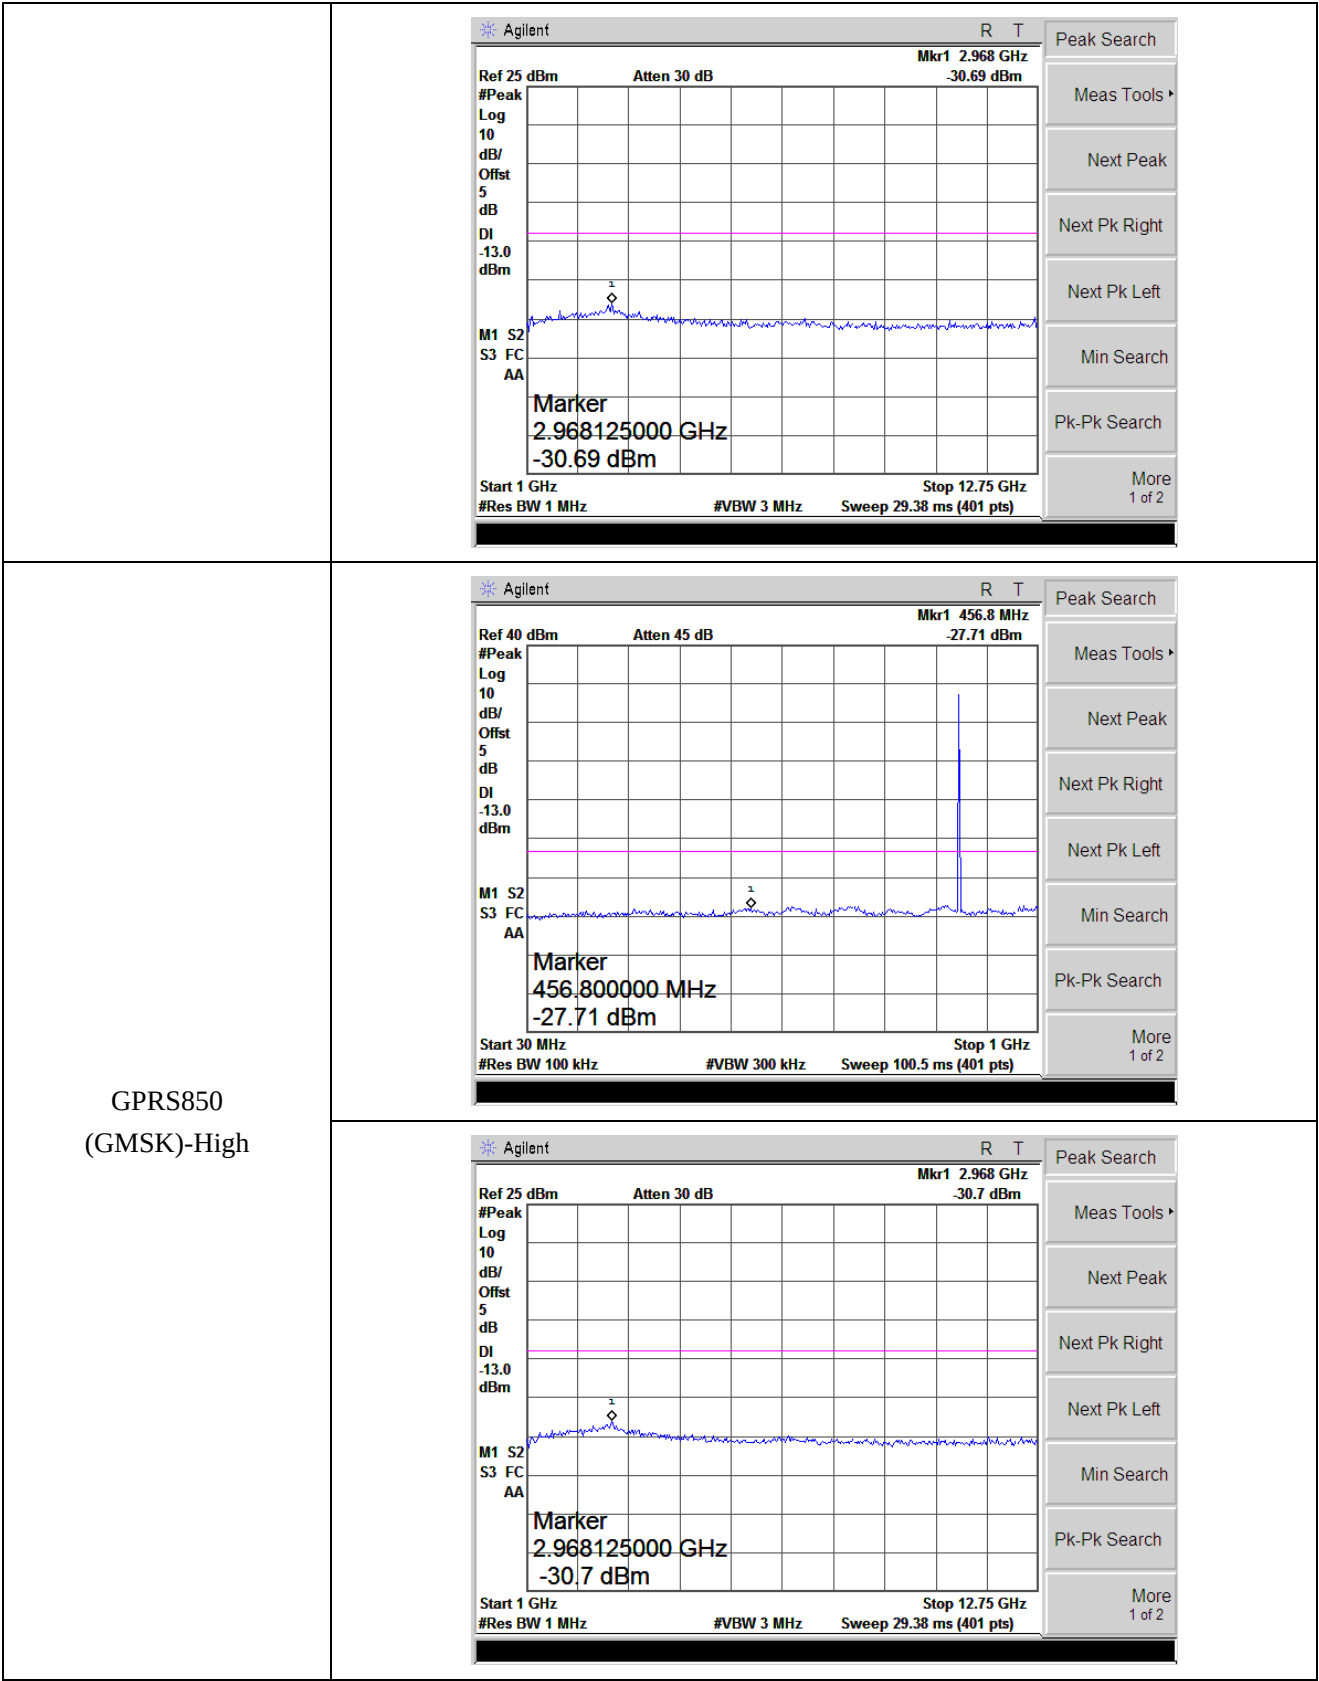


Bandedge

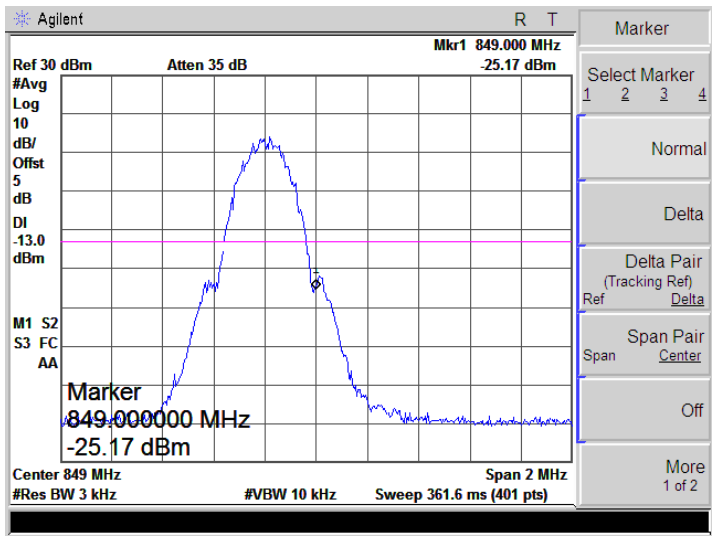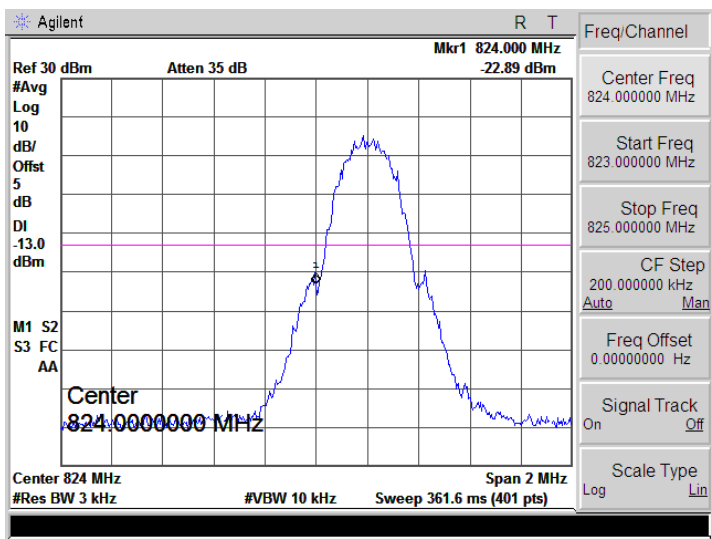


EGPRS850
(8PSK,1Slot)-Low

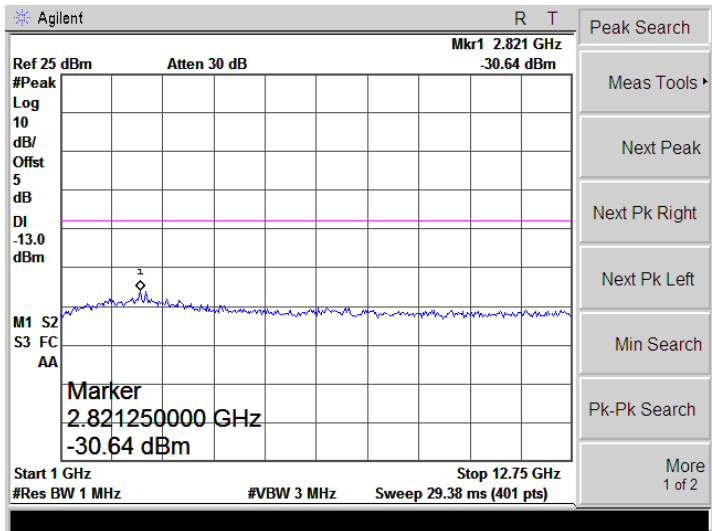
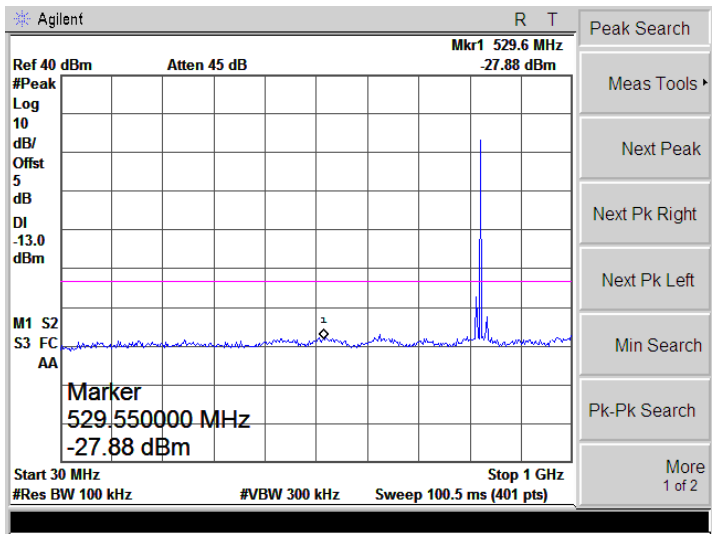


EGPRS850
(8PSK,1Slot)-Middle



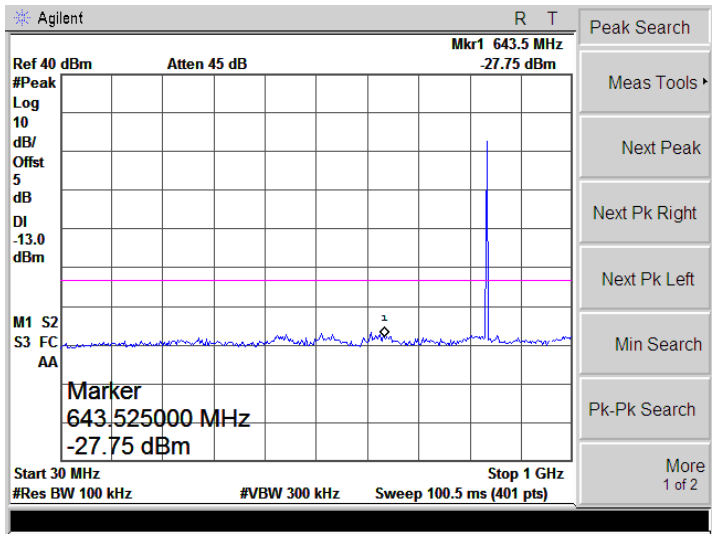


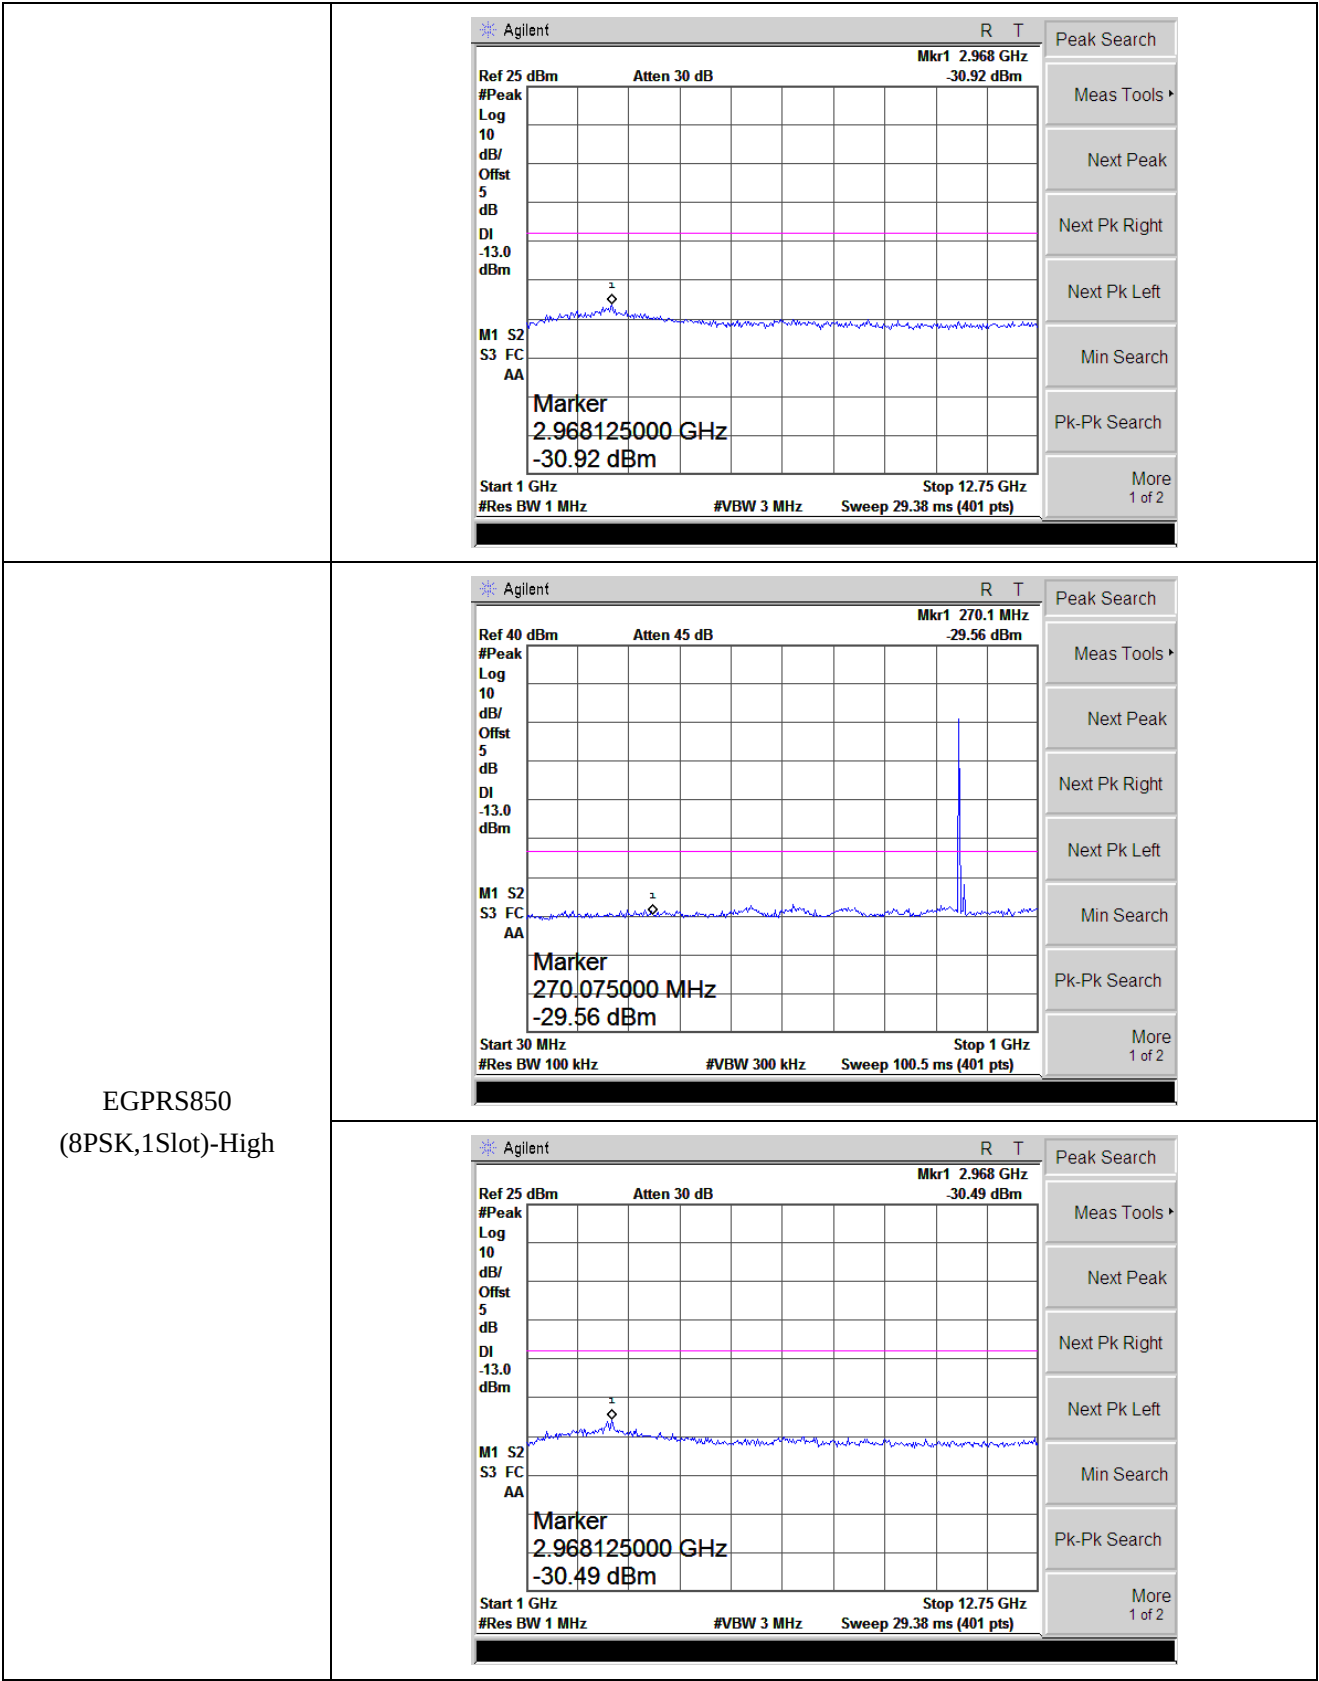




Bandedge

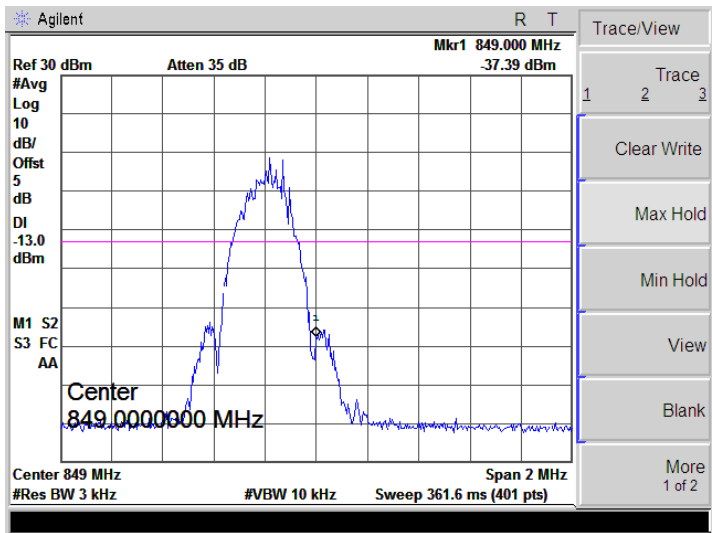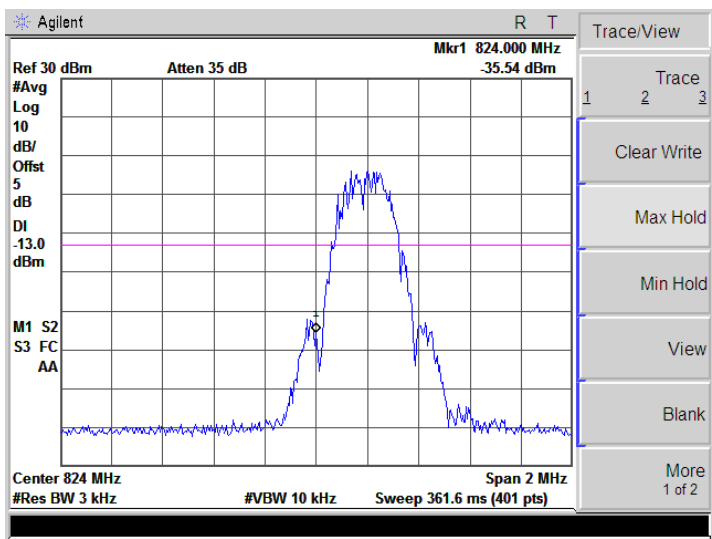




PCS1900
(GMSK)-Low

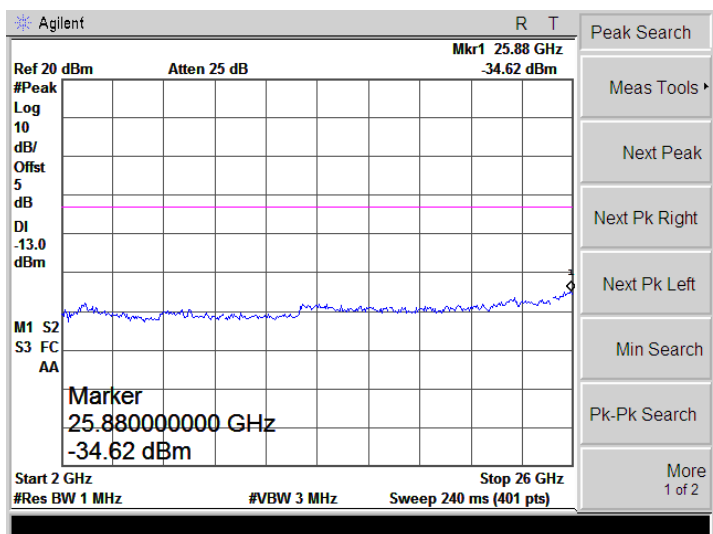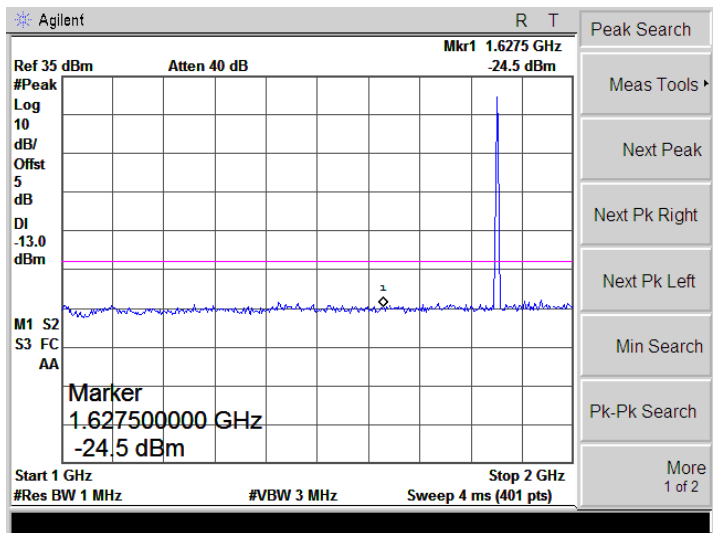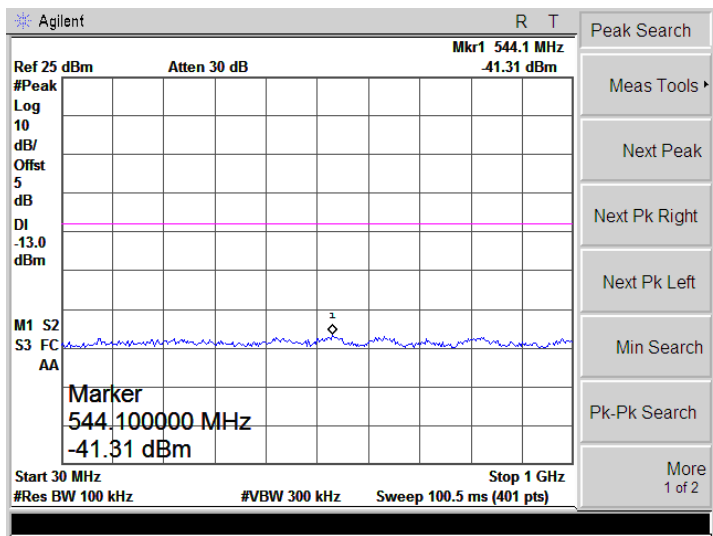



PCS1900
(GMSK)-Middle

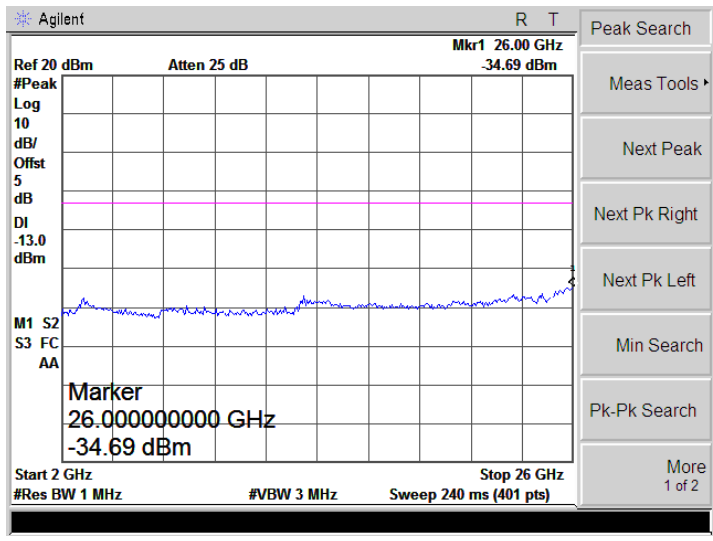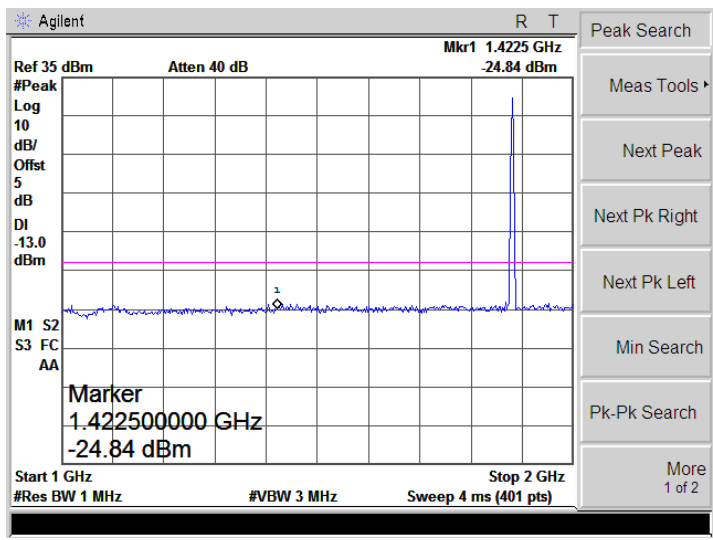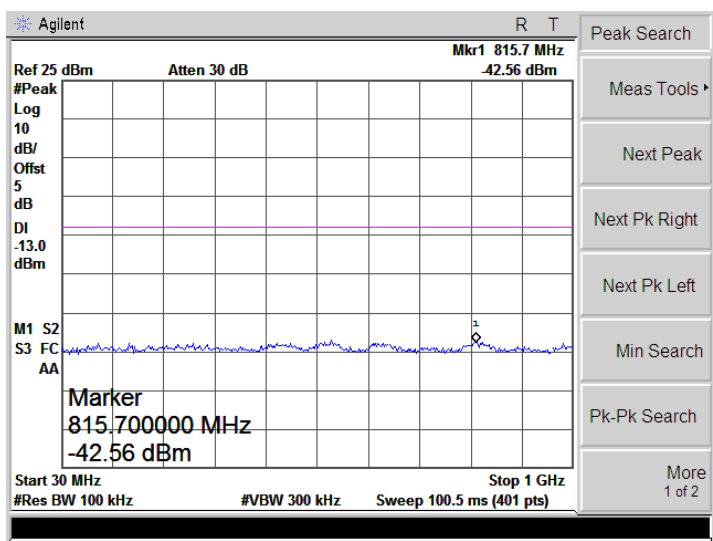




PCS1900
(GMSK)-High

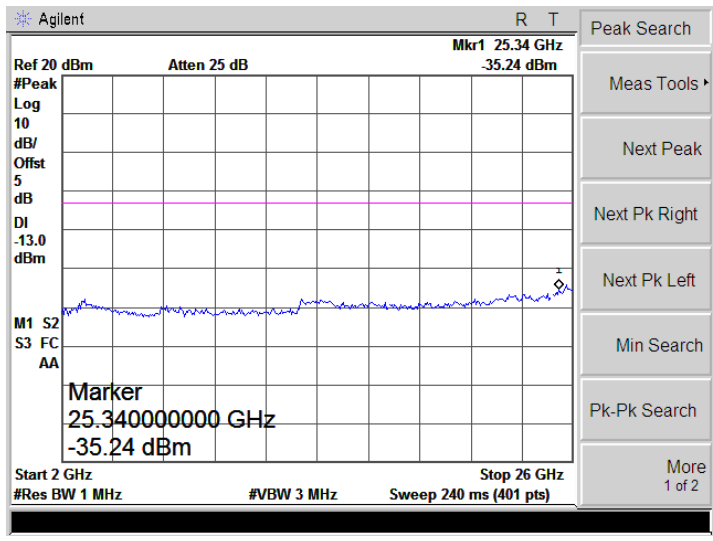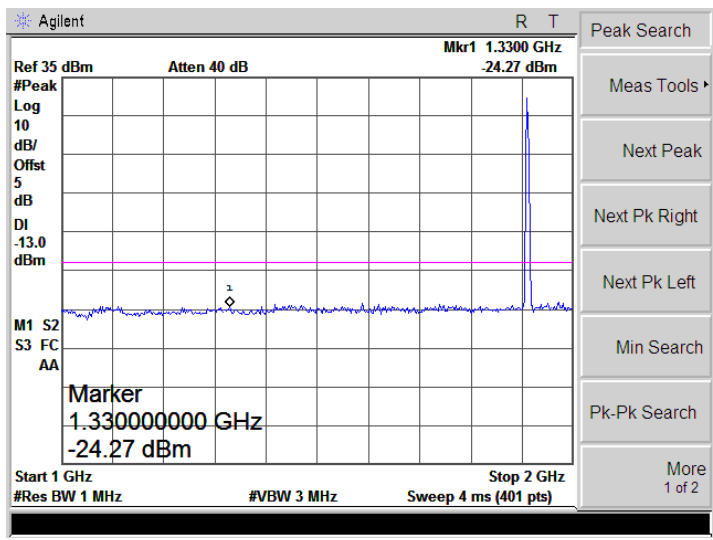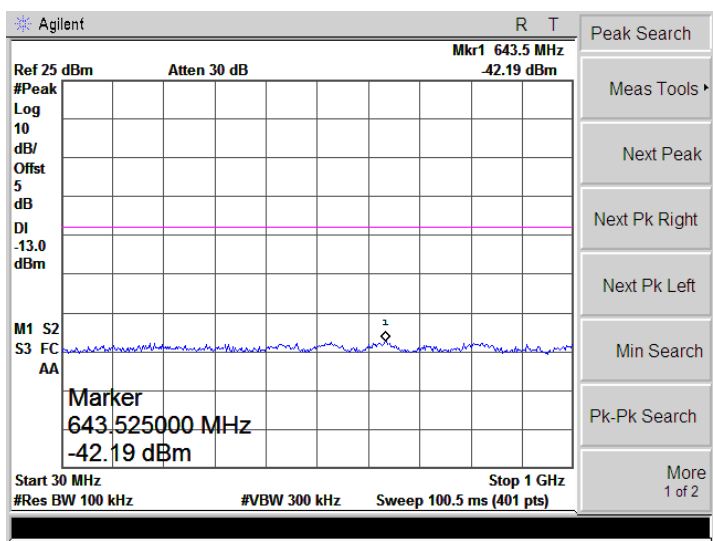




Bandedge

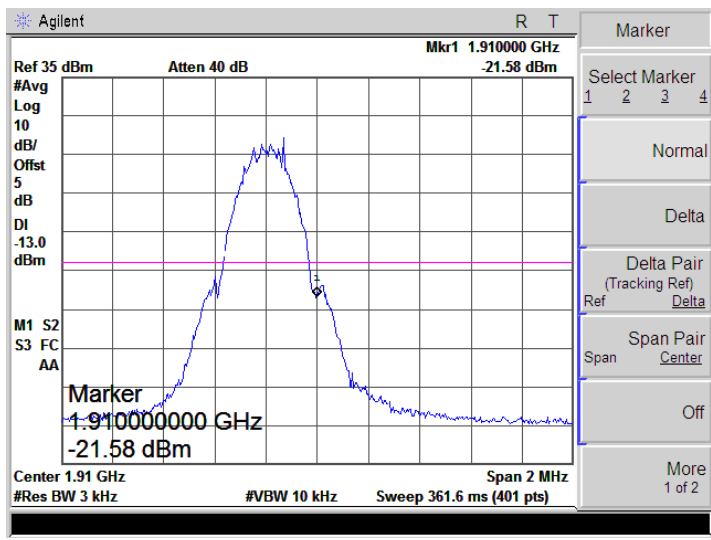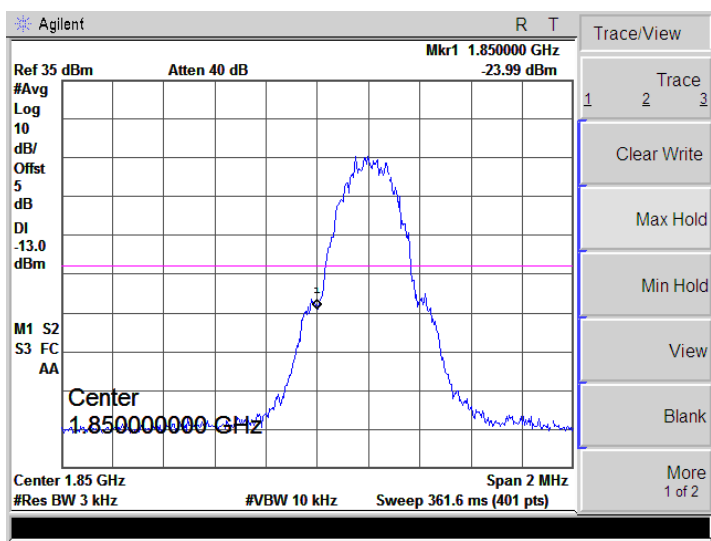




GPRS1900
(GMSK,1Slot)-Low

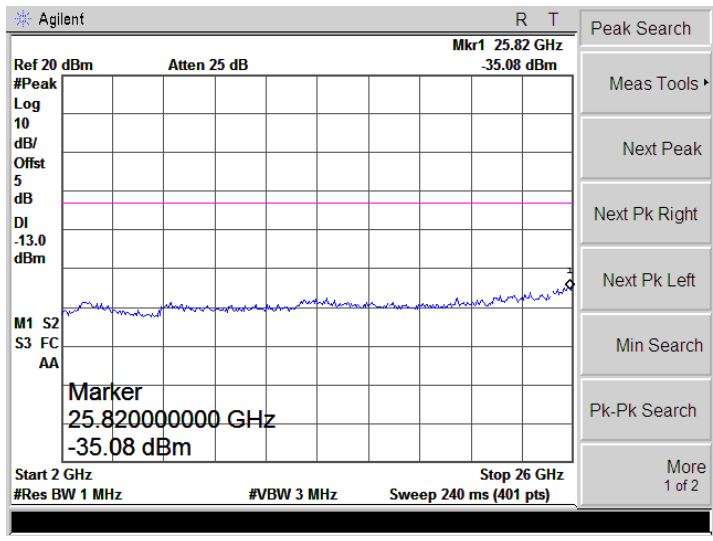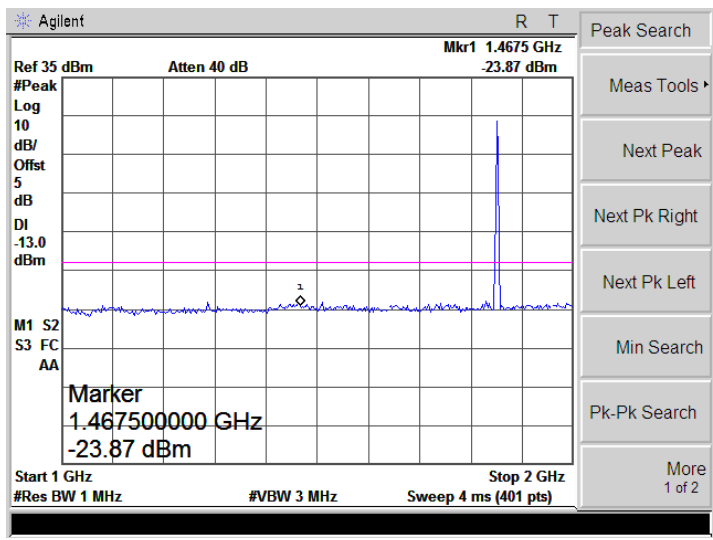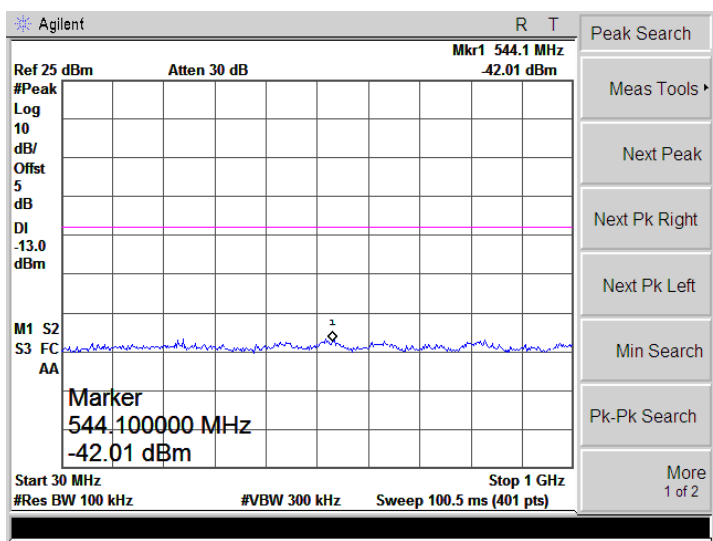



GPRS1900
(GMSK,1Slot)-Middle

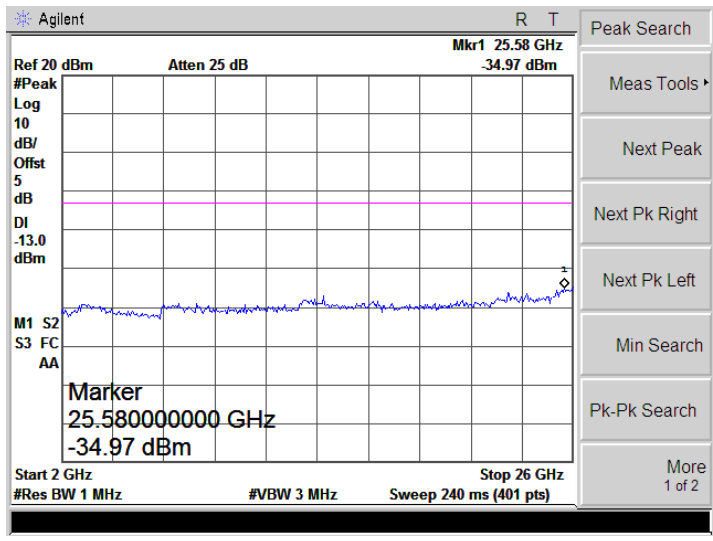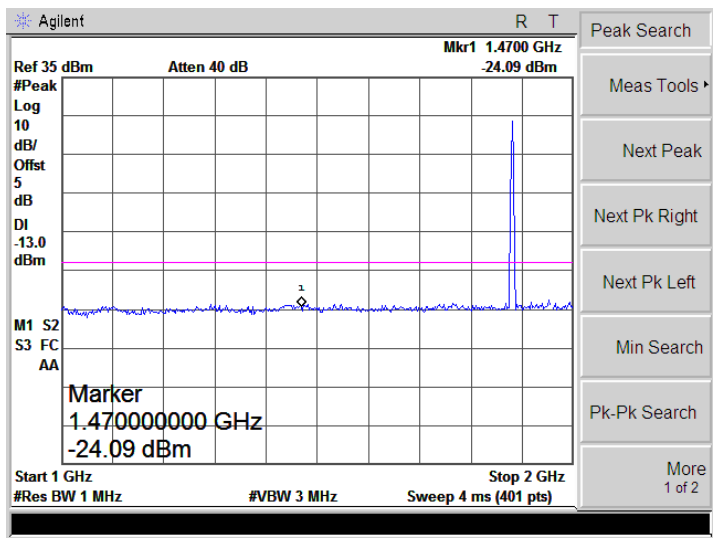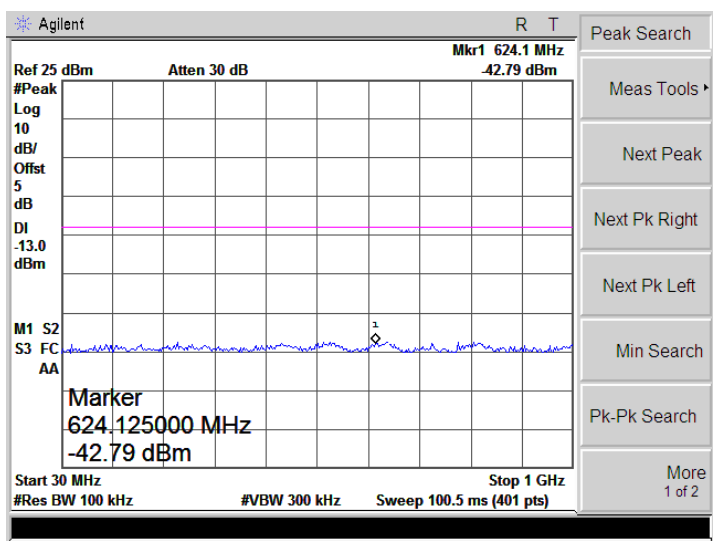




GPRS1900
(GMSK,1Slot)-High

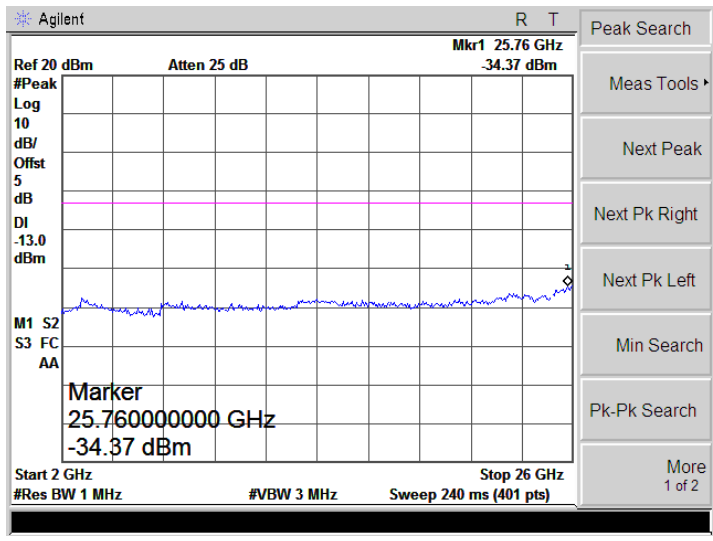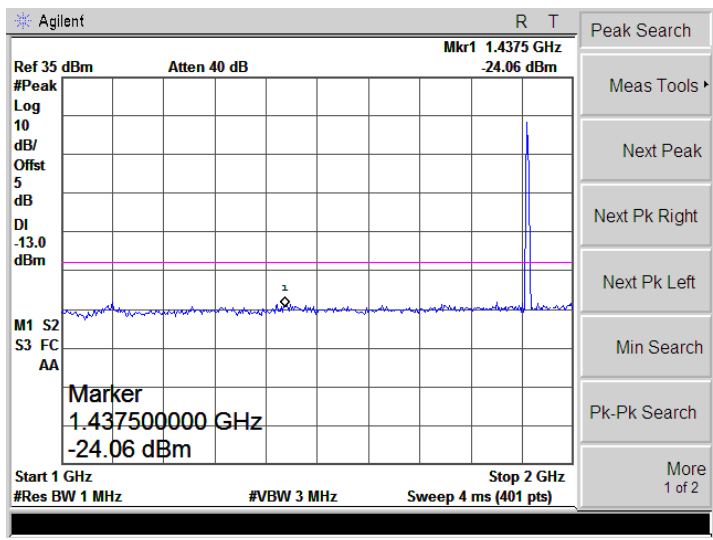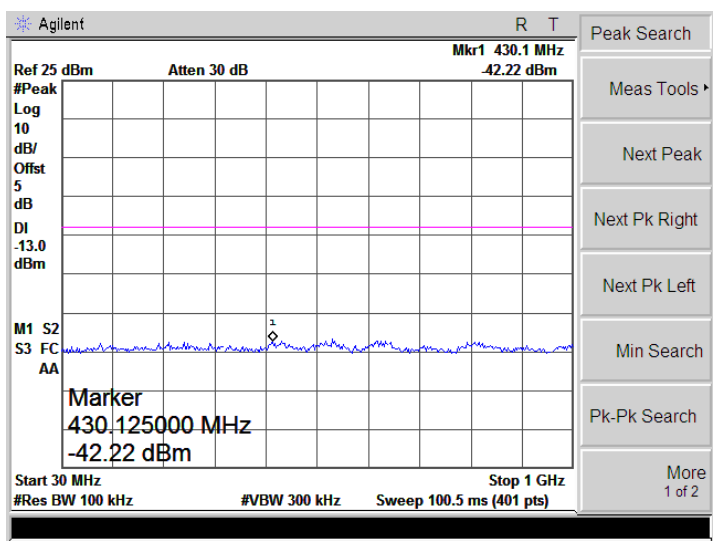




Bandedge

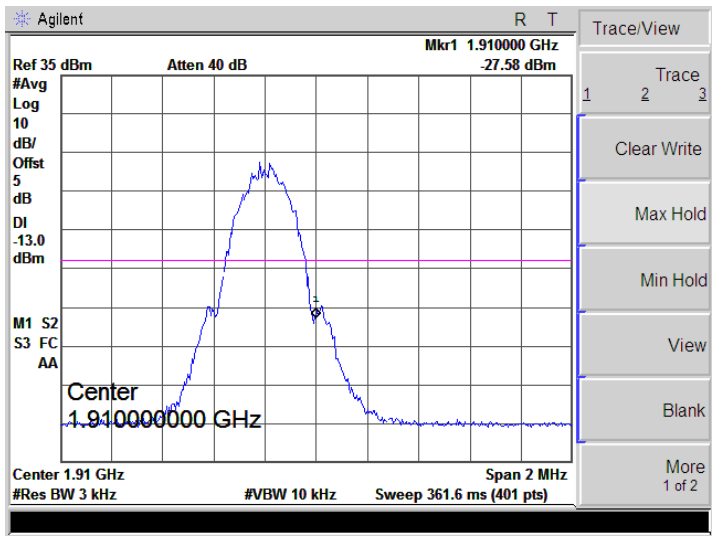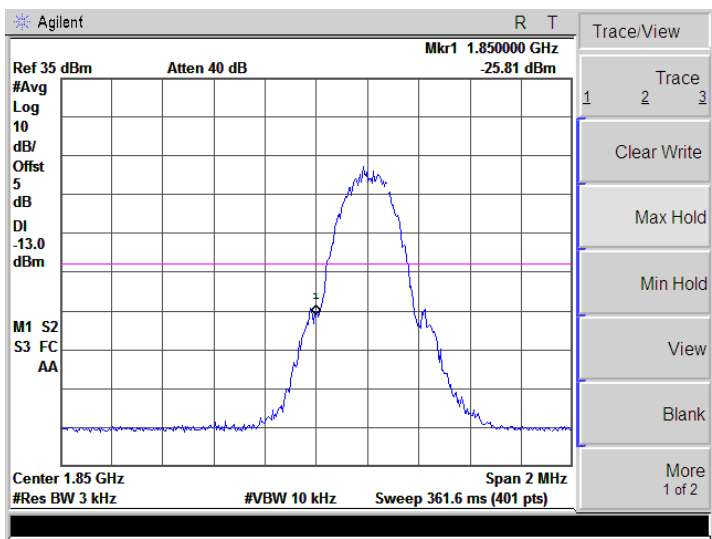




EGPRS1900
(8PSK,1Slot)-Low

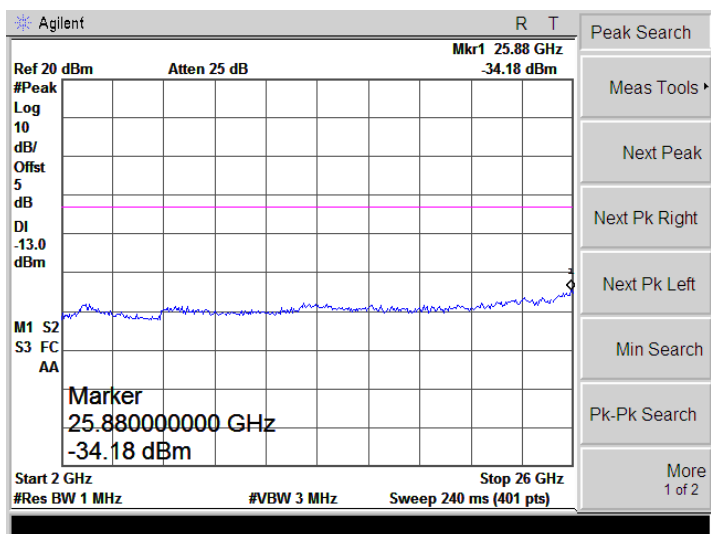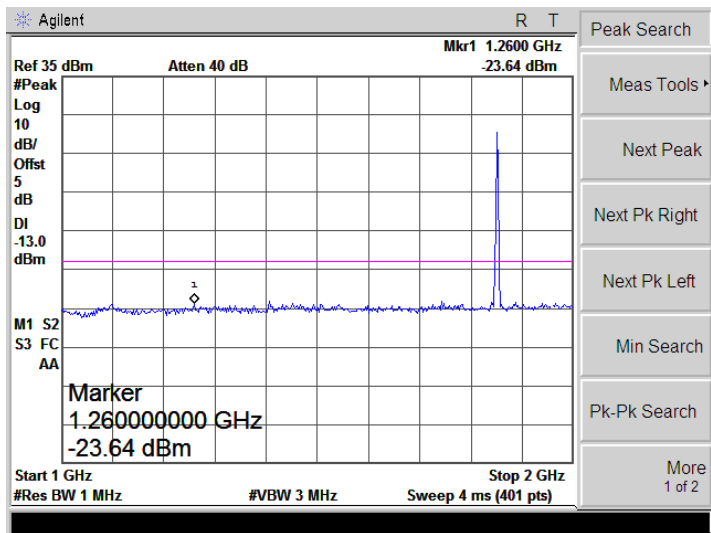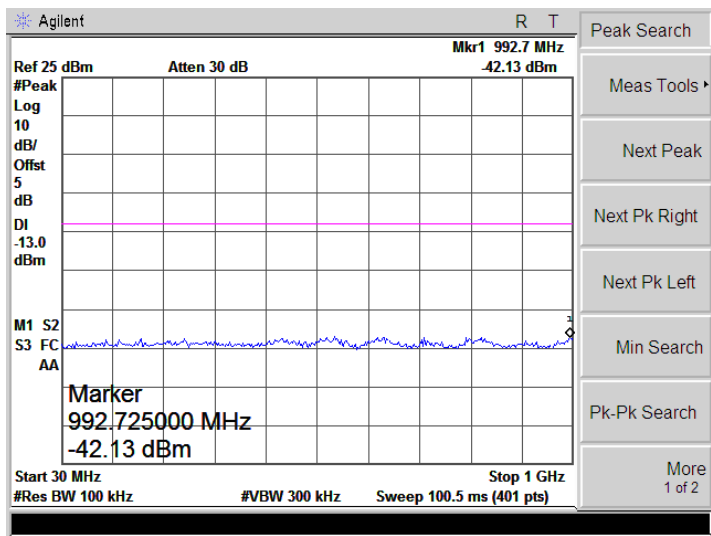



EGPRS1900
(8PSK,1Slot)-Middle

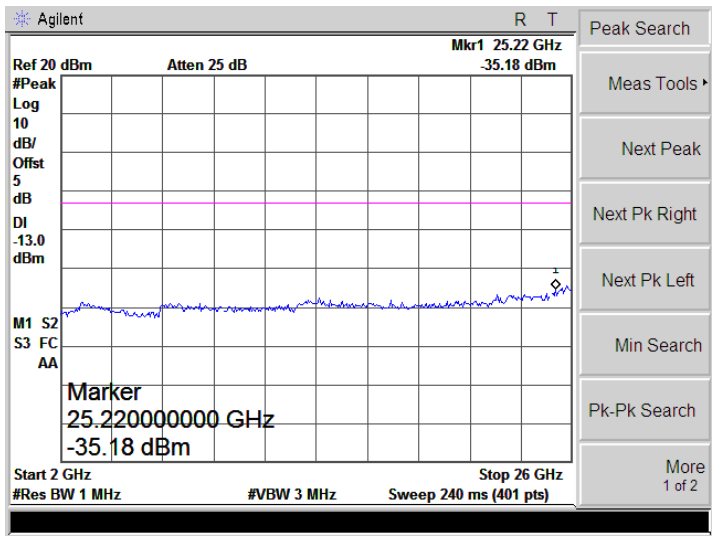
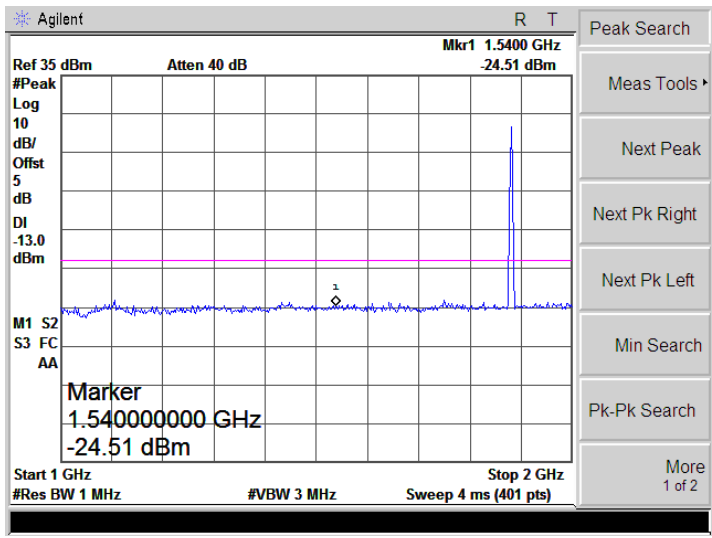
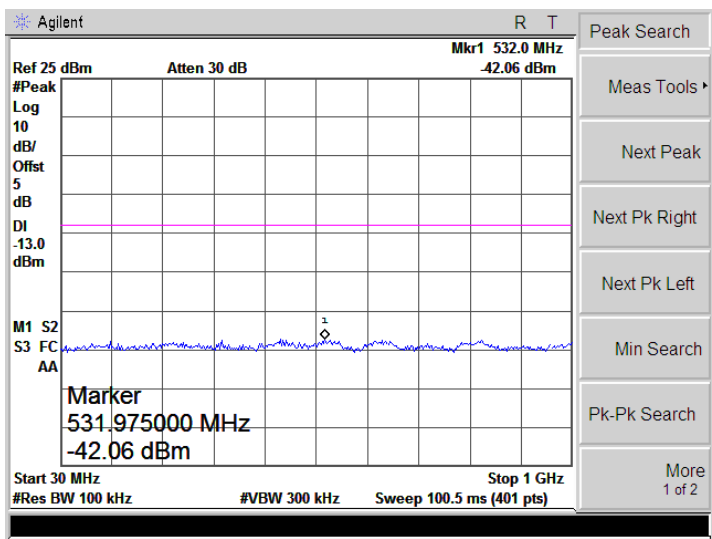





EGPRS1900
(8PSK,1Slot)-High

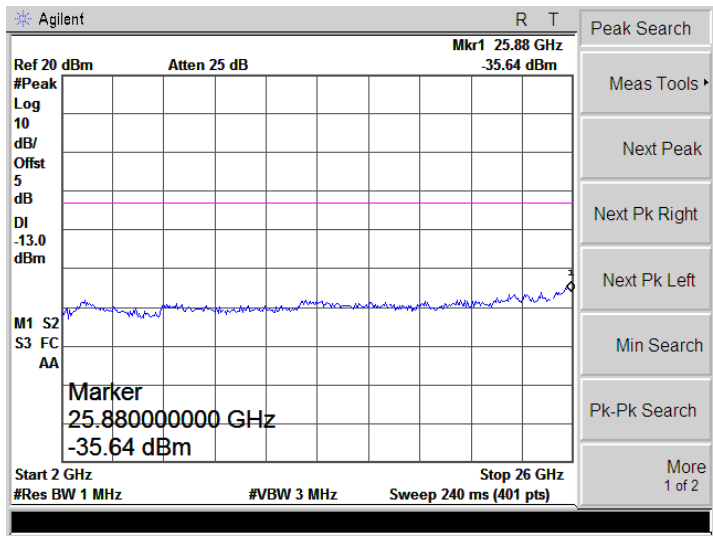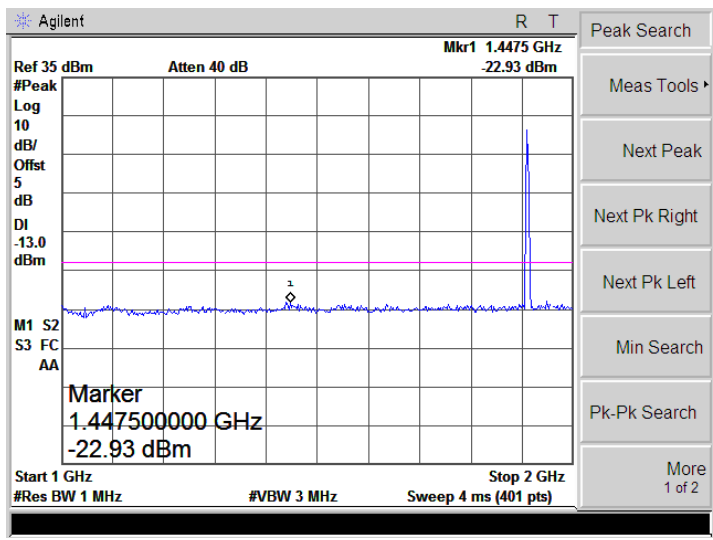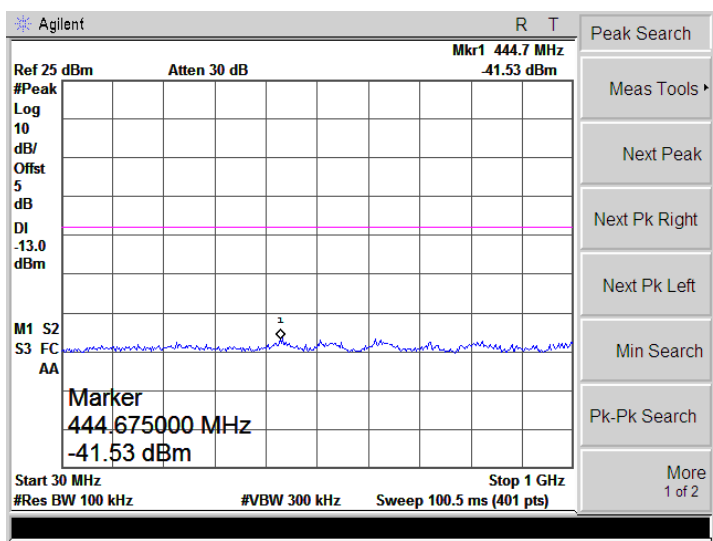



Bandedge


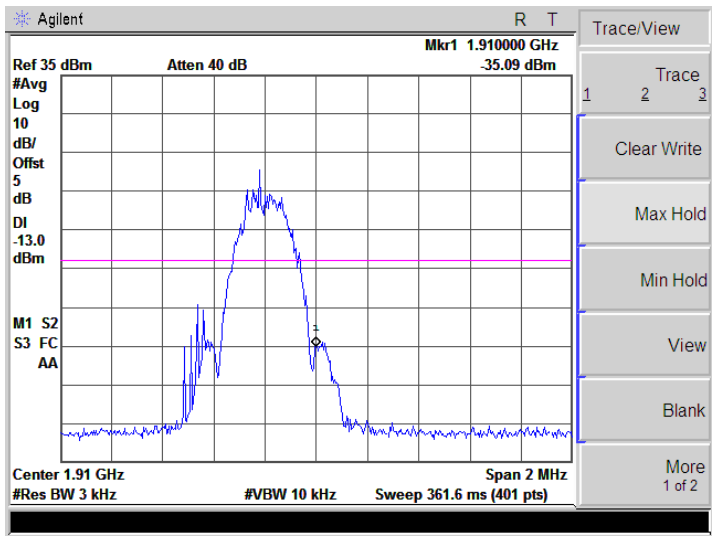
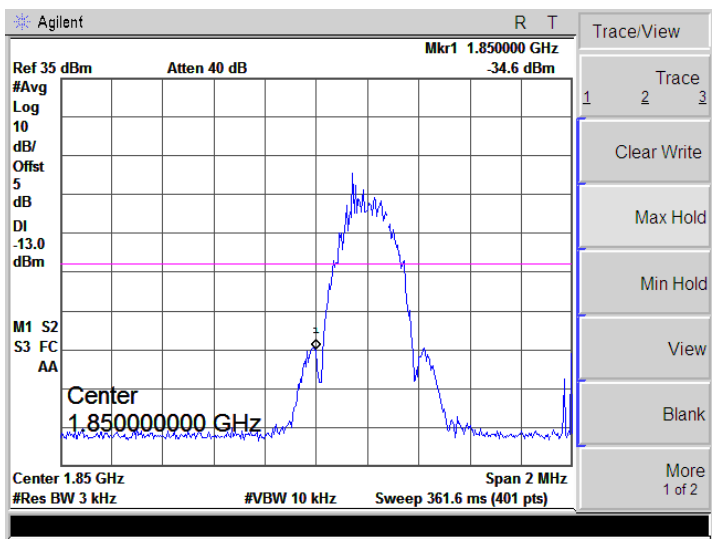


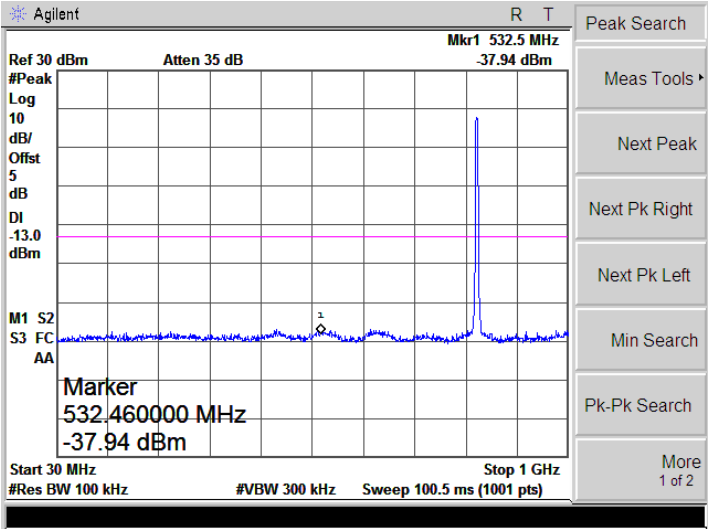
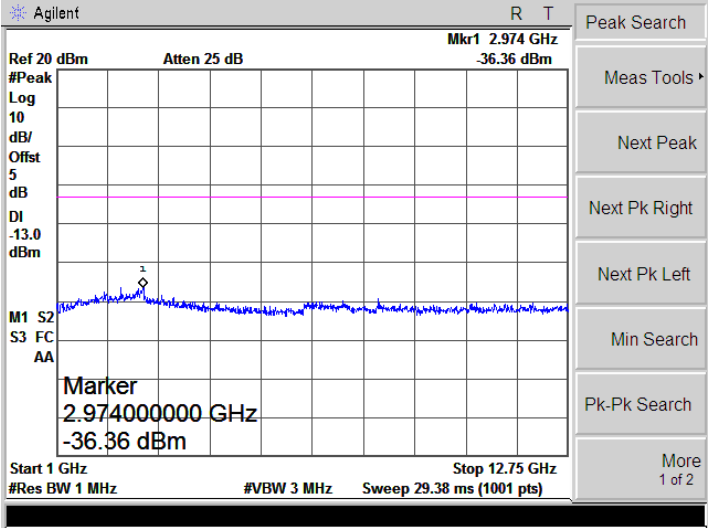
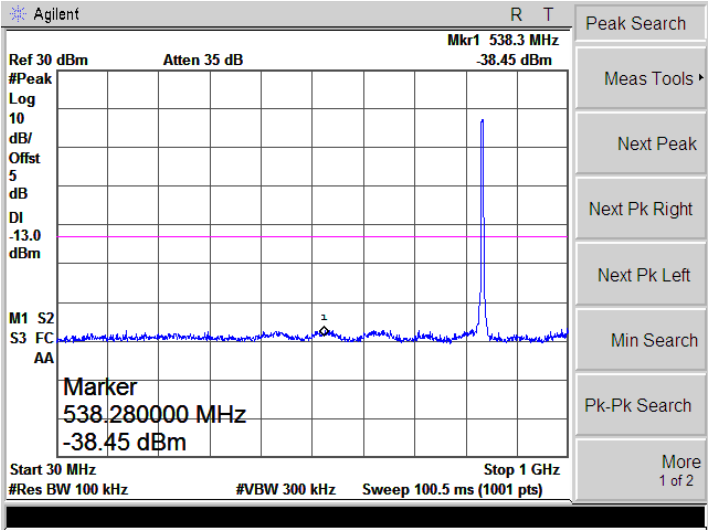
WCDMA Band V-Low	
	
WCDMA Band V-Middle	

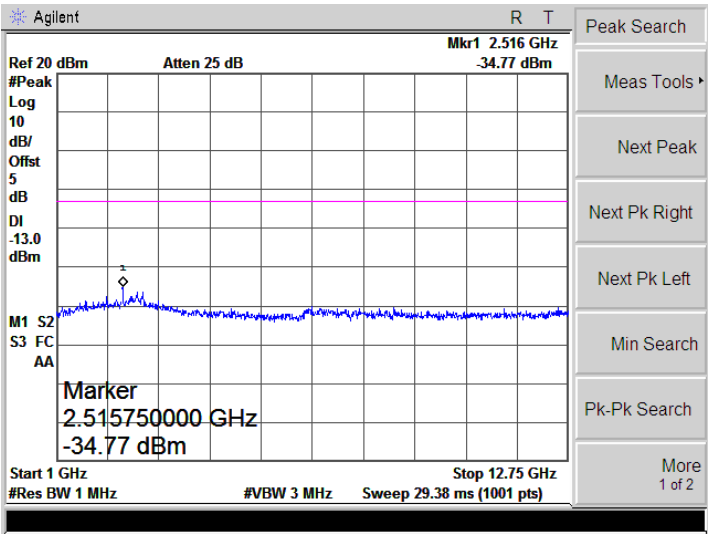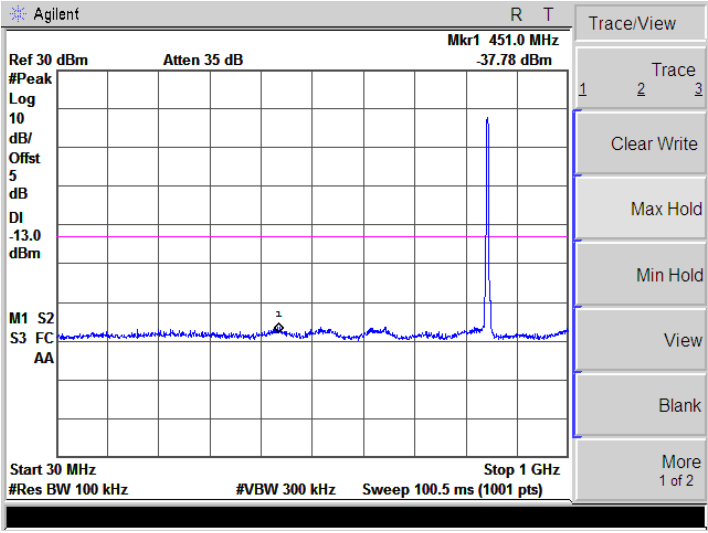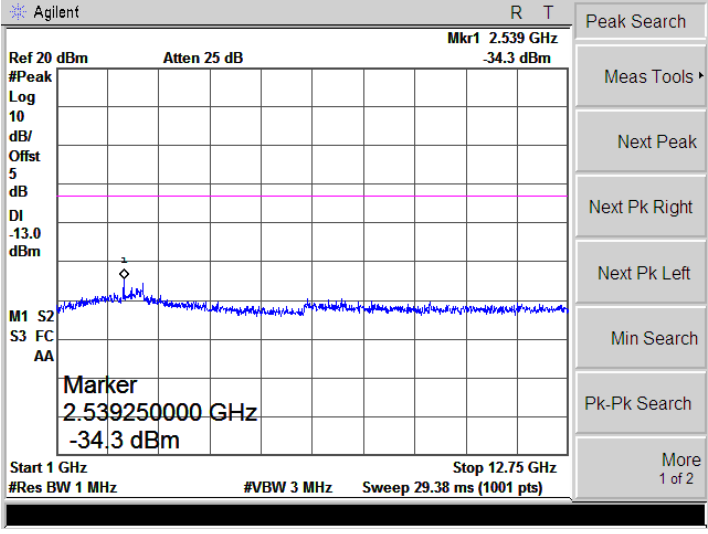	
WCDMA Band V-High	
	



Bandedge

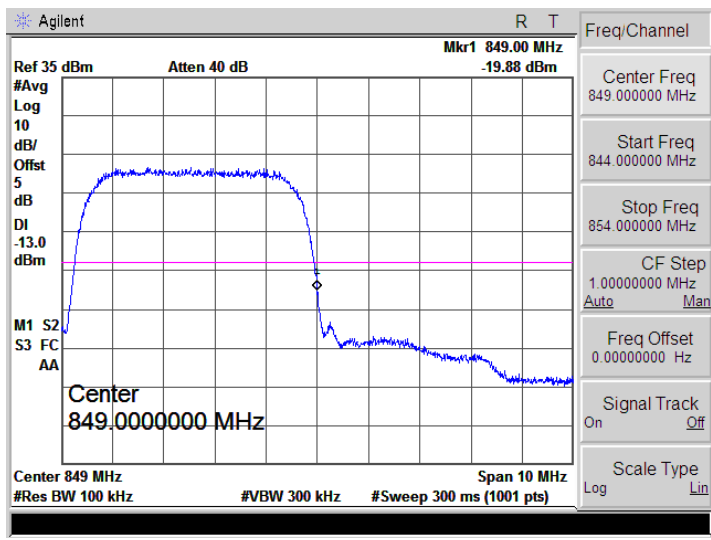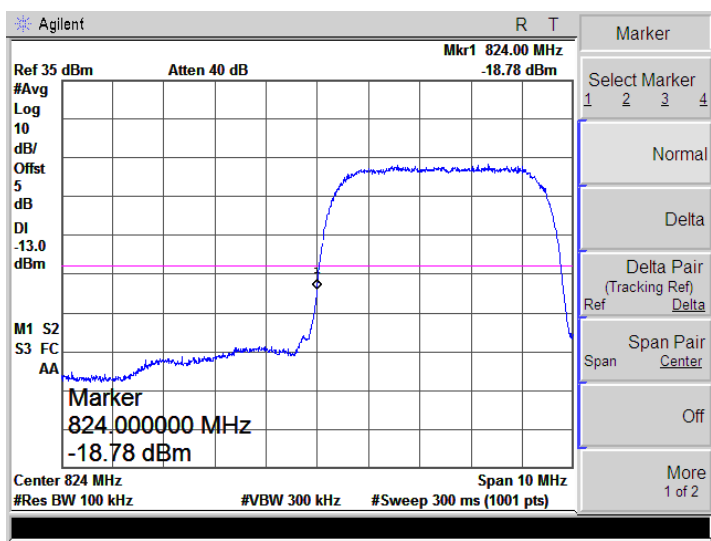

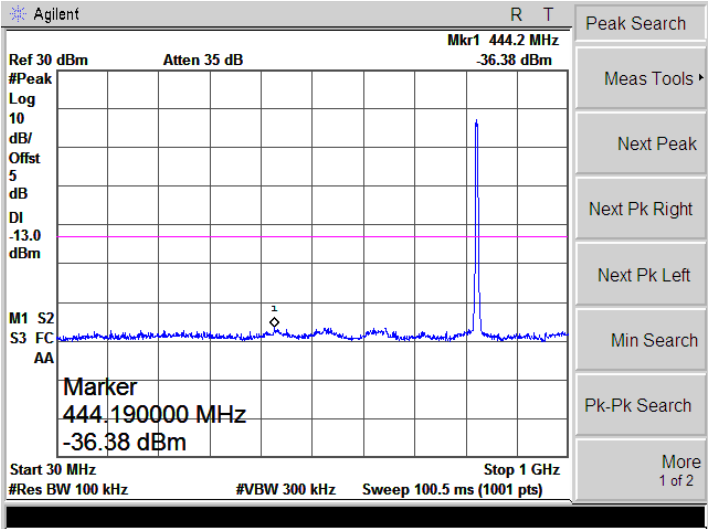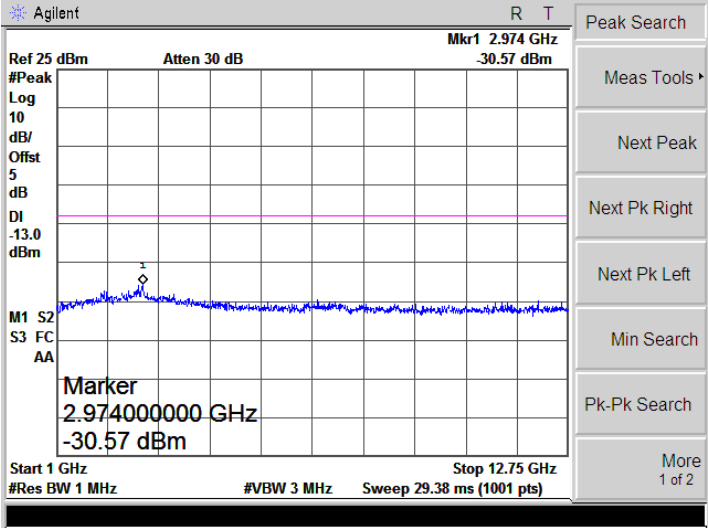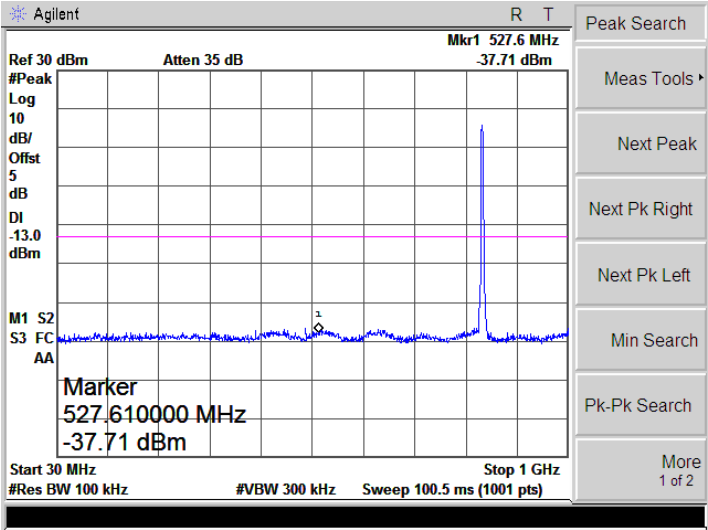
HSDPA Band V-Low	
	
HSDPA Band V-Middle	

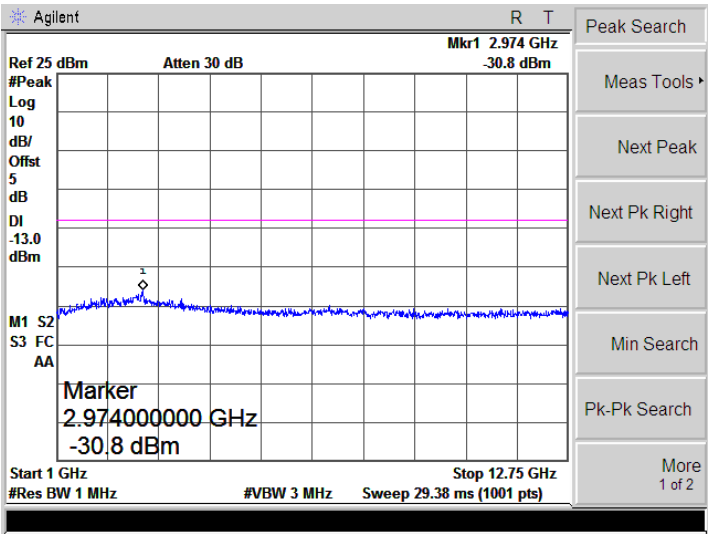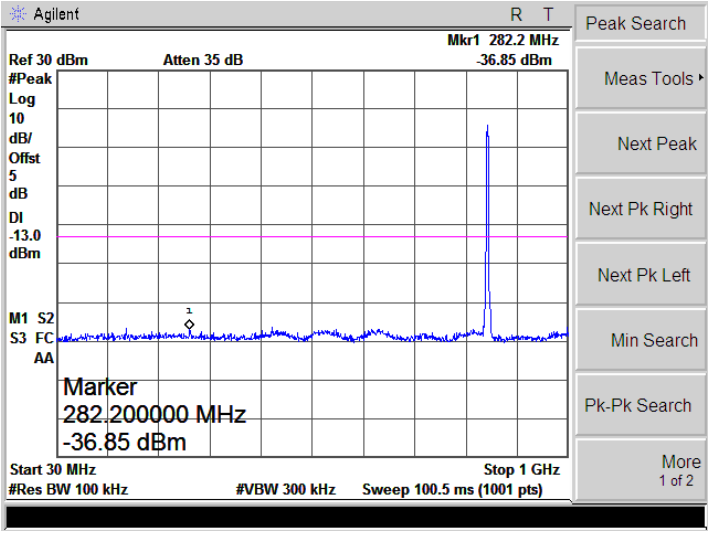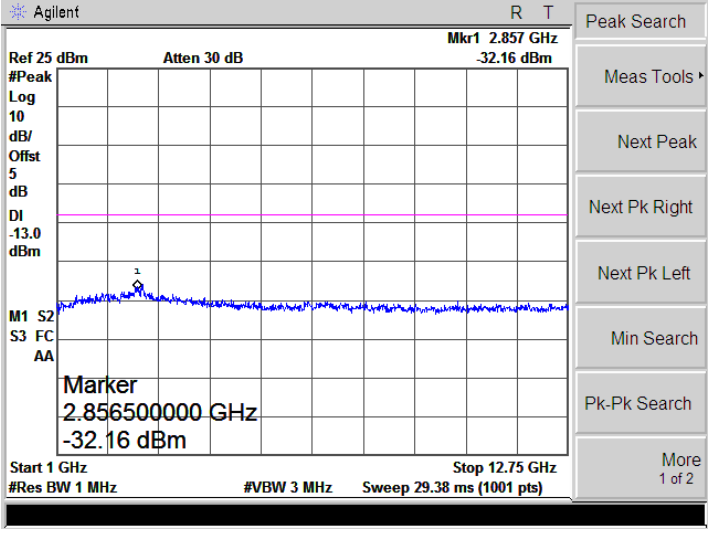	
HSDPA Band V-High	
	


Bandedge

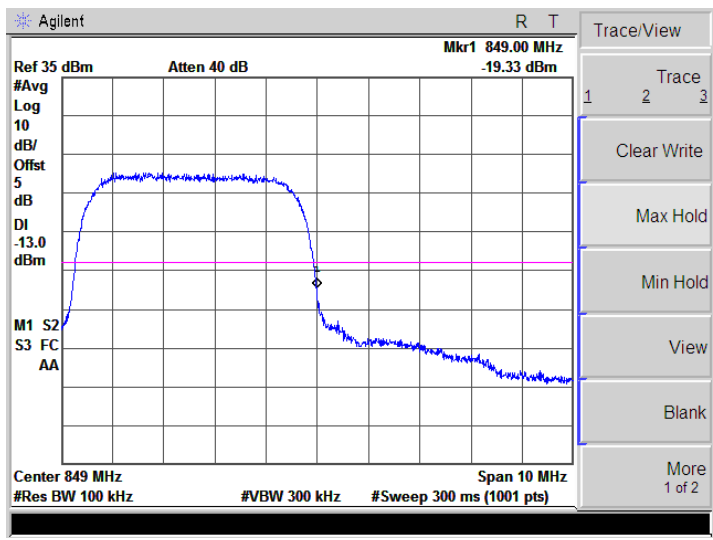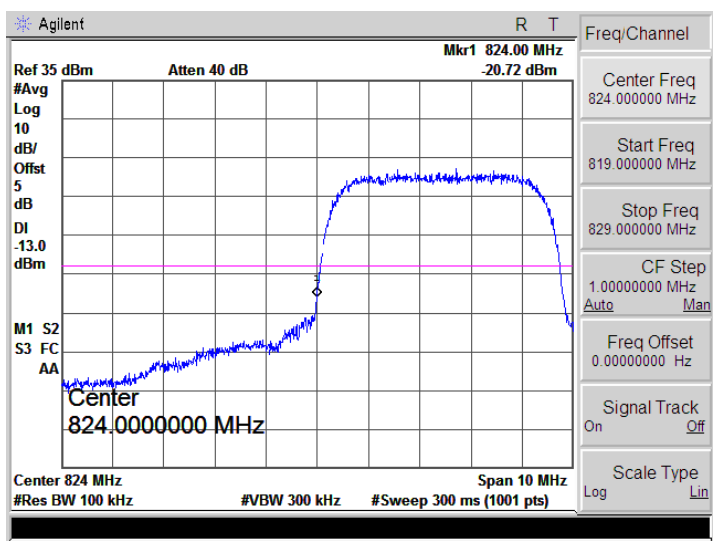


HSUPA Band V-Low


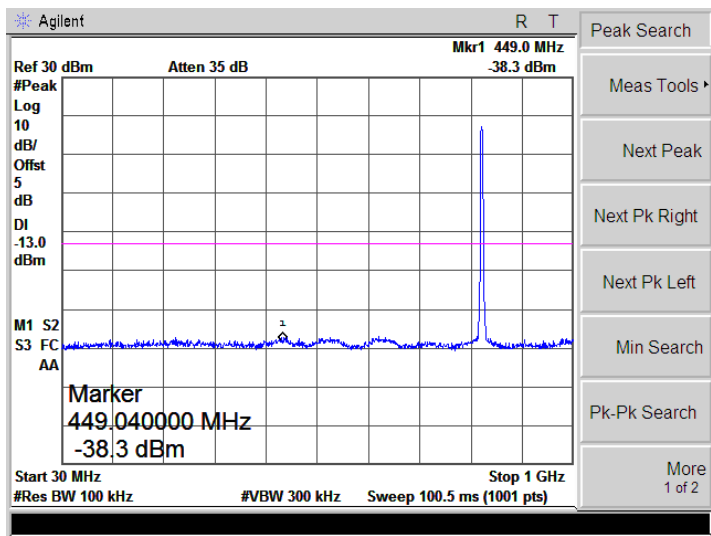


HSUPA Band V-Middle



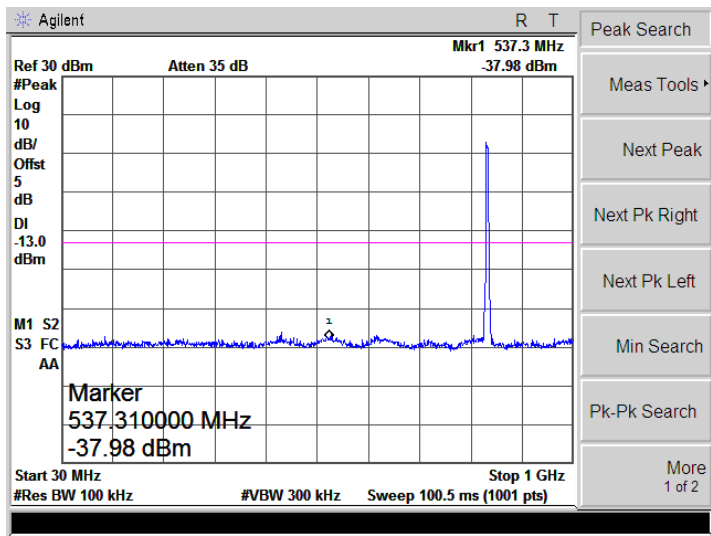


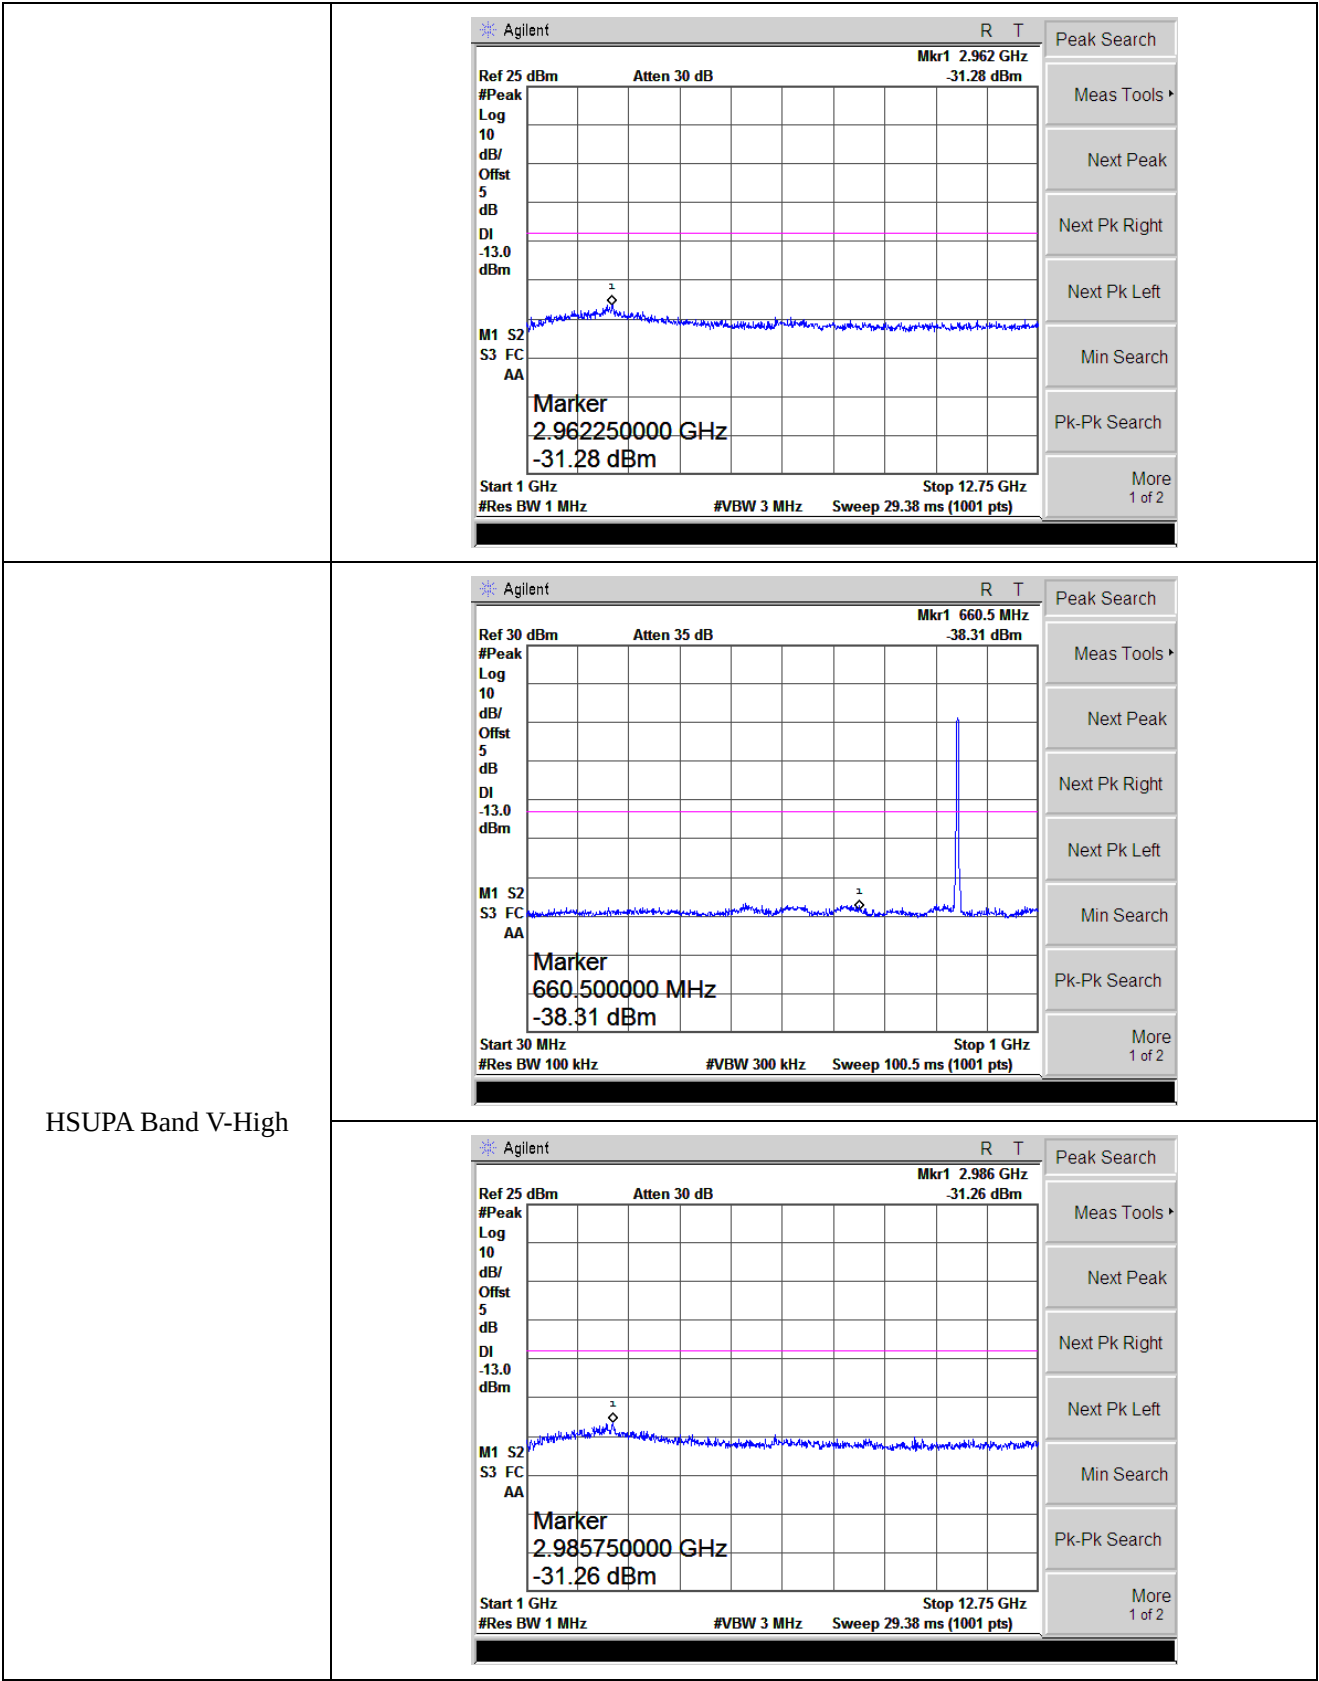




Bandedge

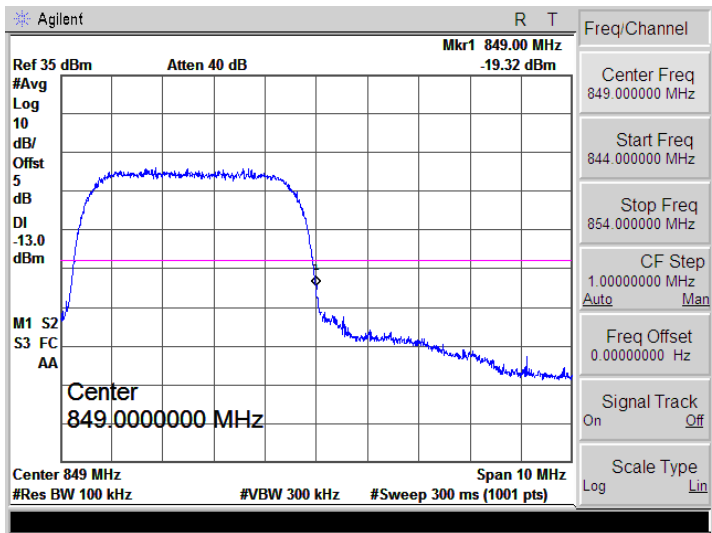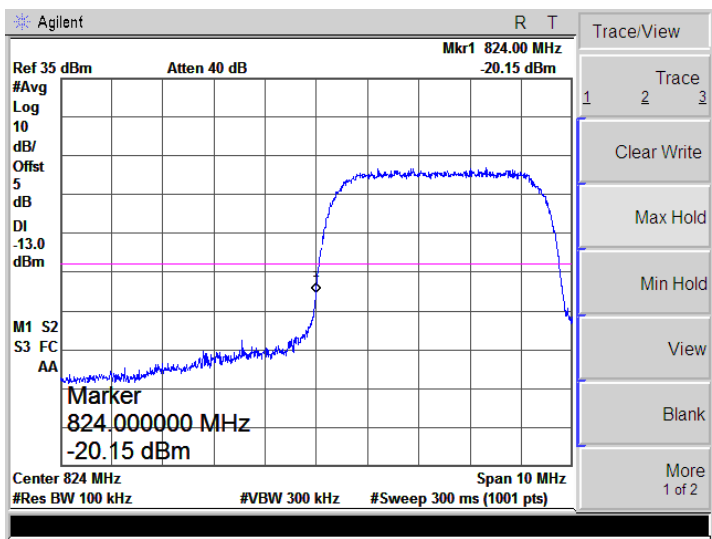




WCDMA Band II-Low

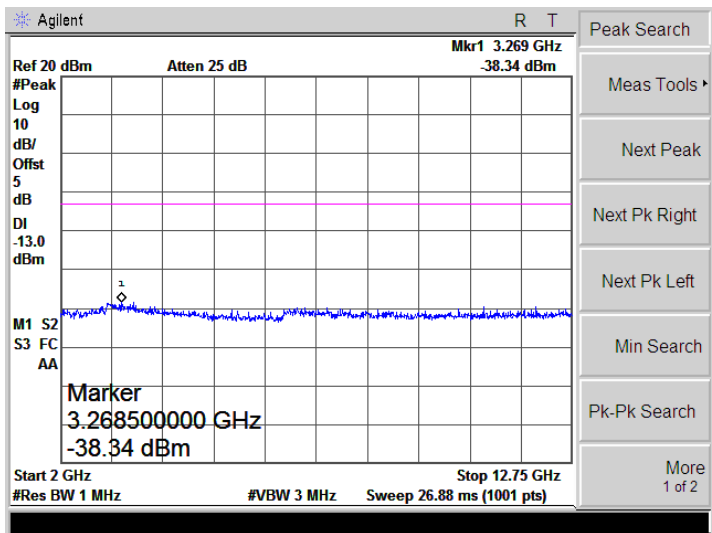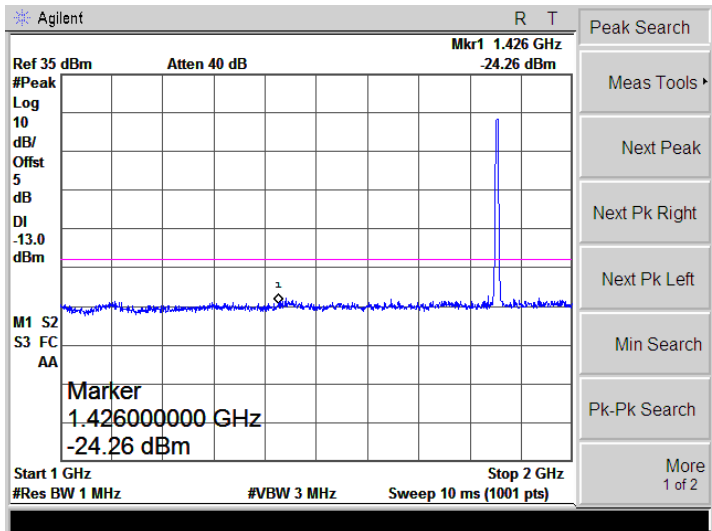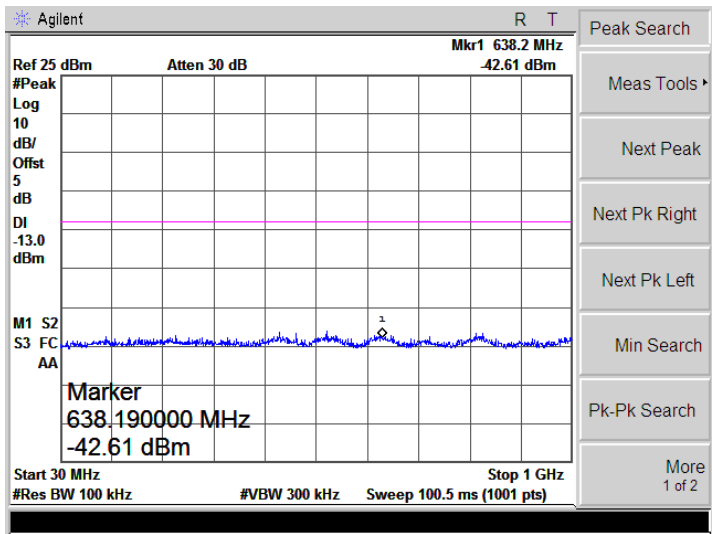



WCDMA Band II-Low

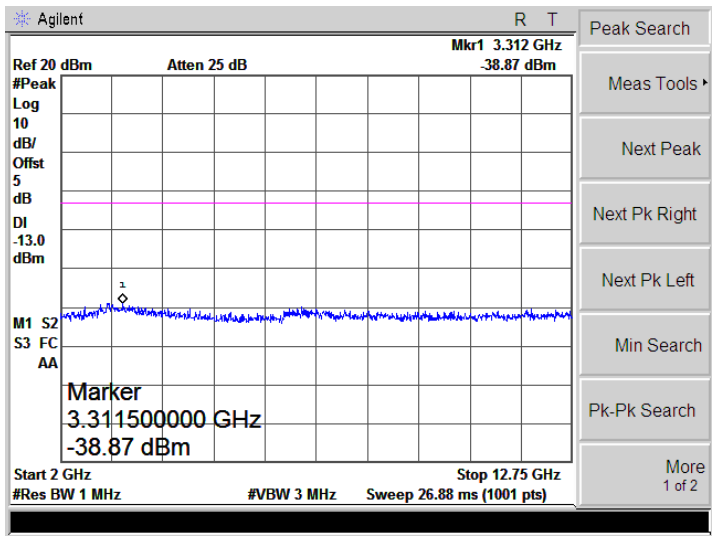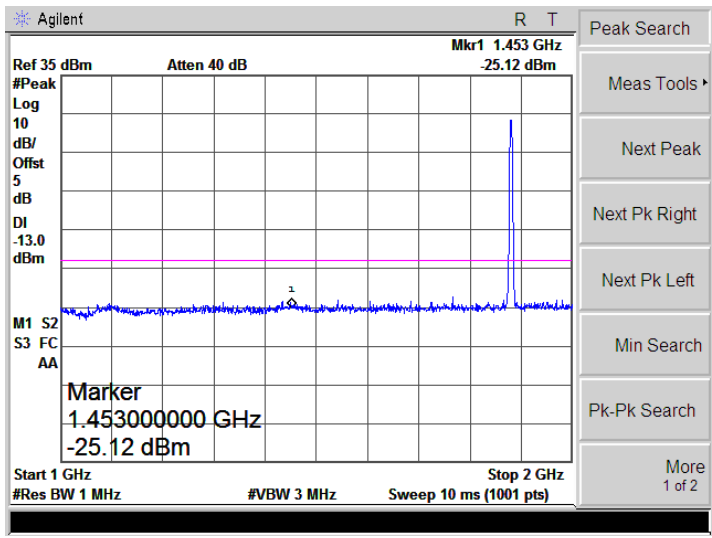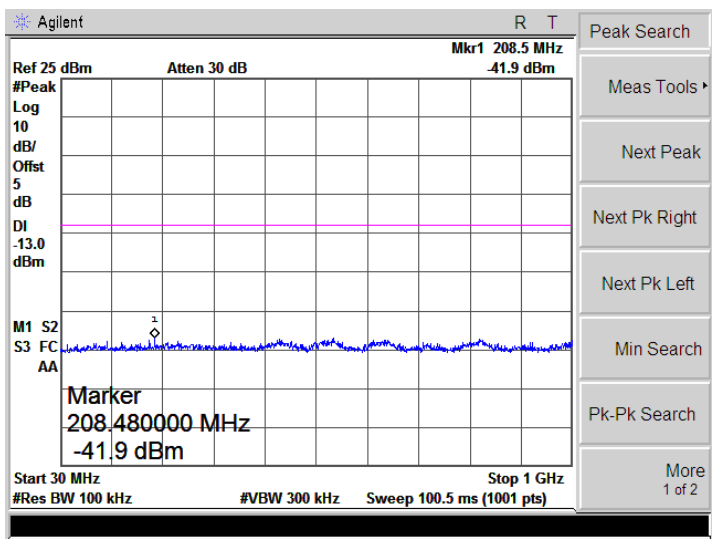




WCDMA Band II-Low

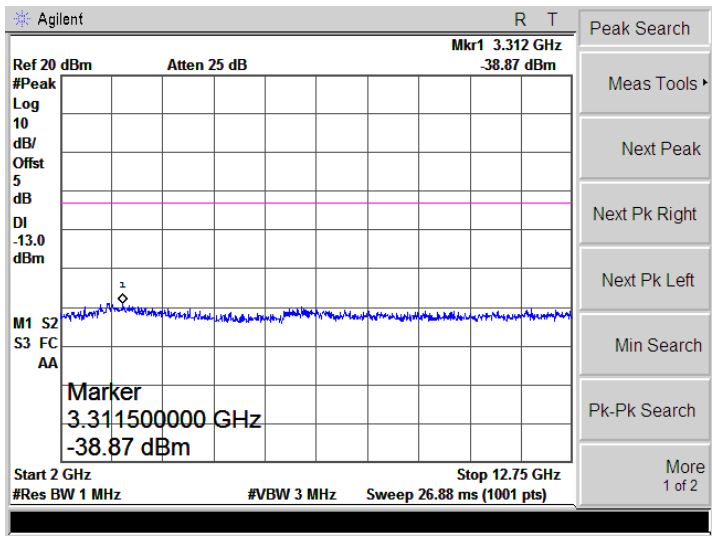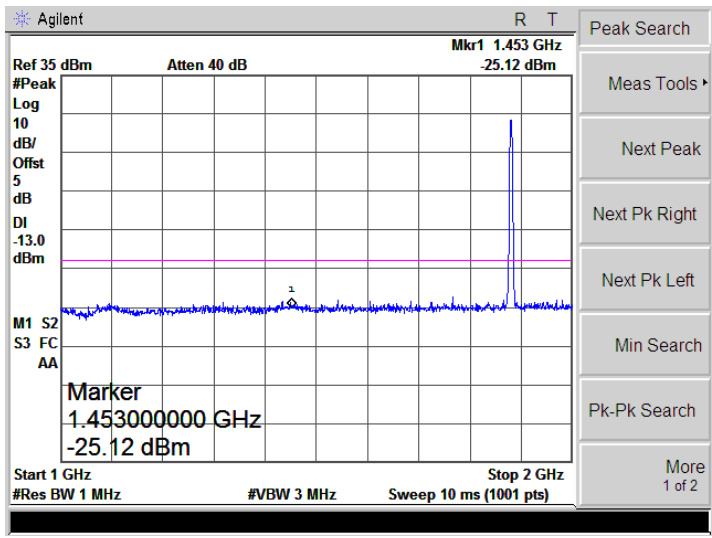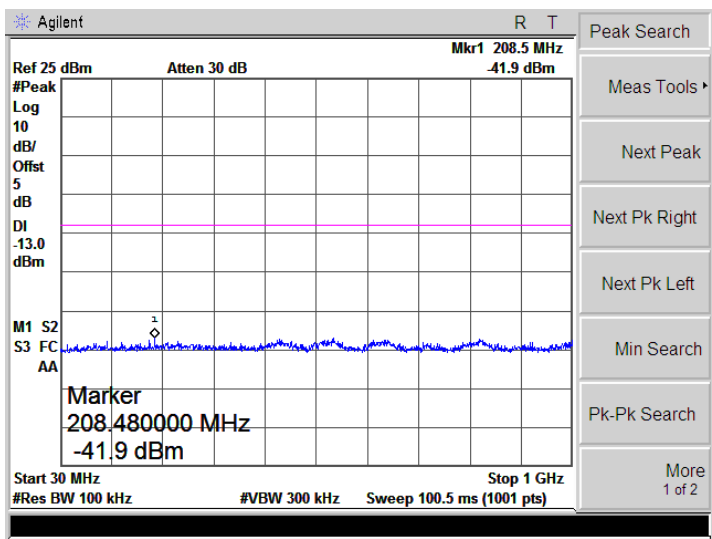




Bandedge

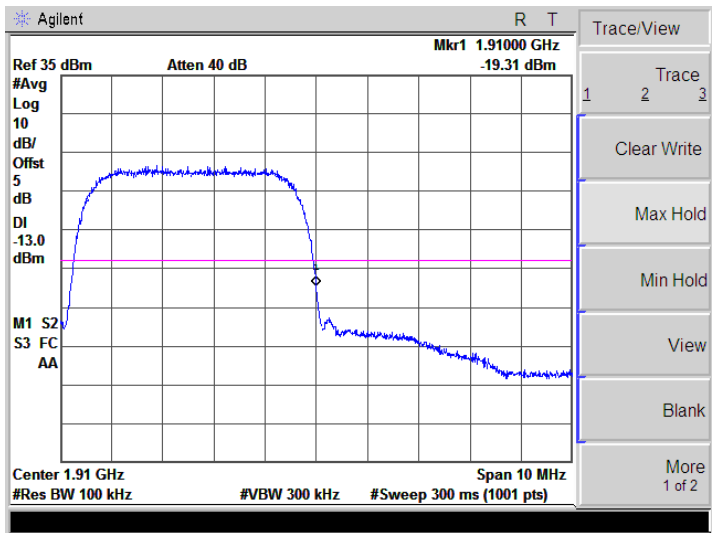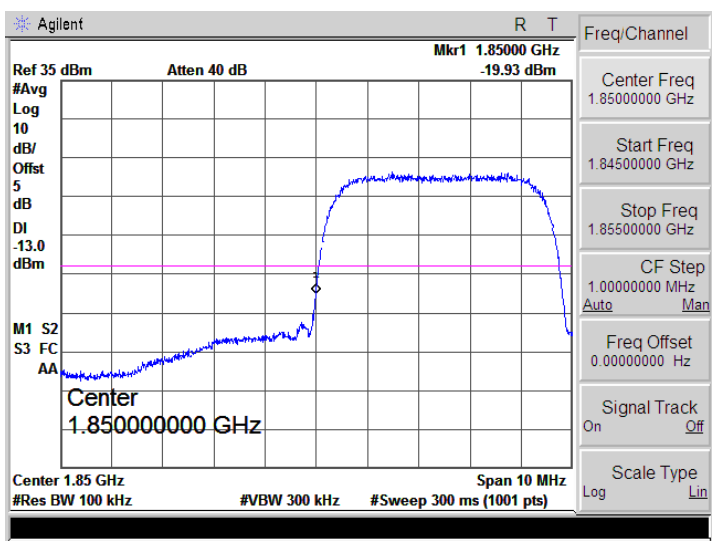




HSDPA Band II-Low

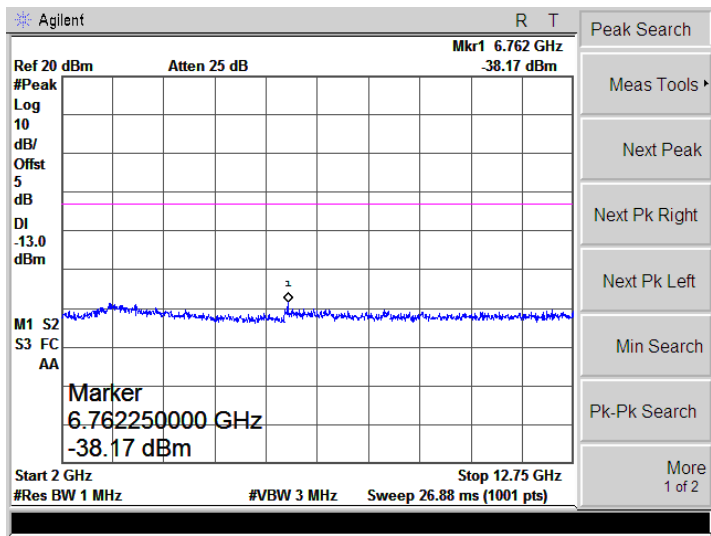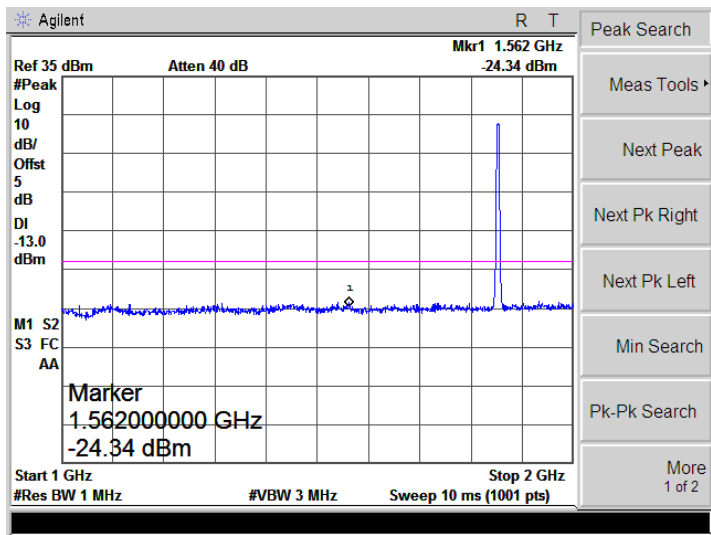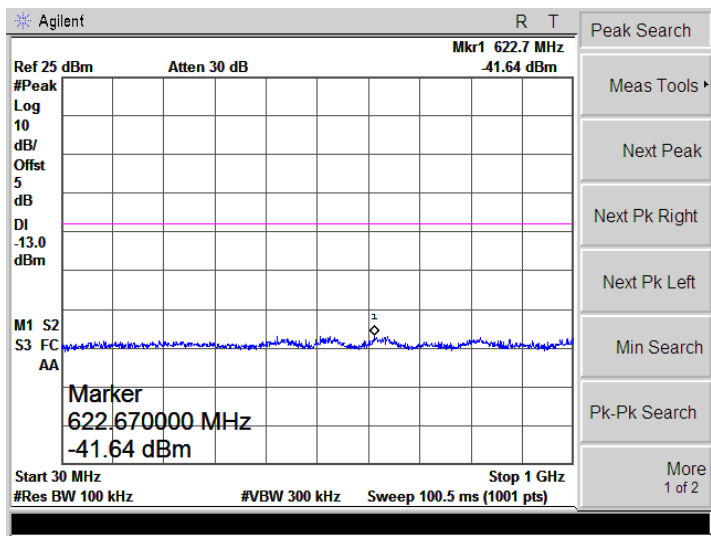



HSDPA Band II-Low

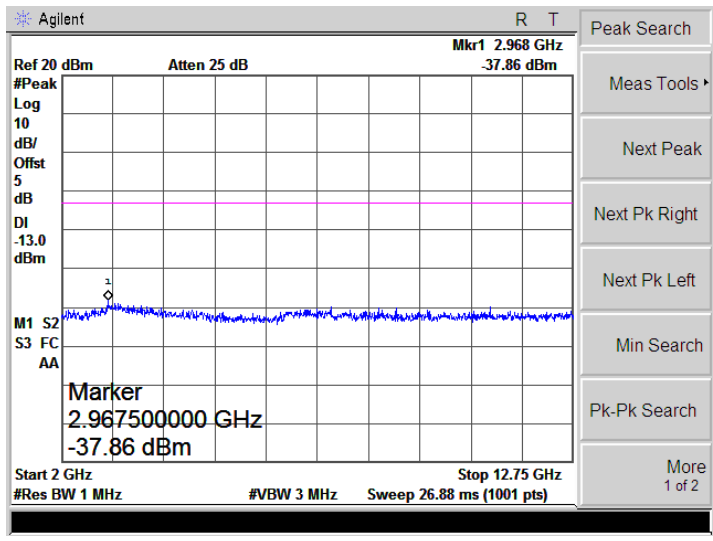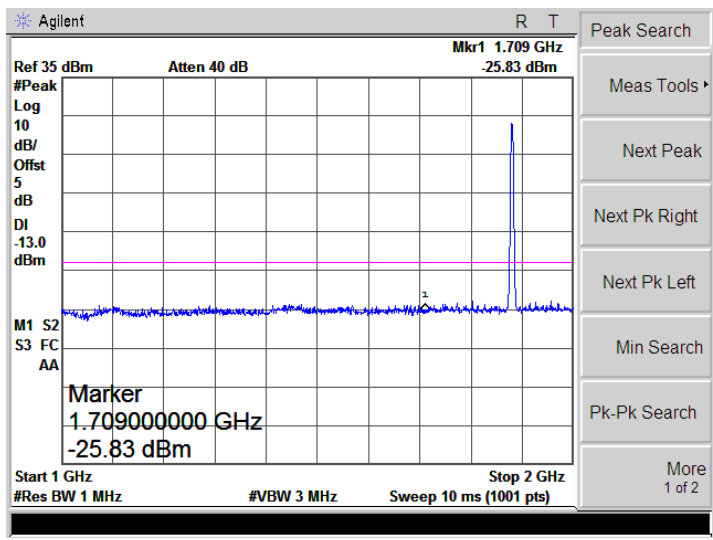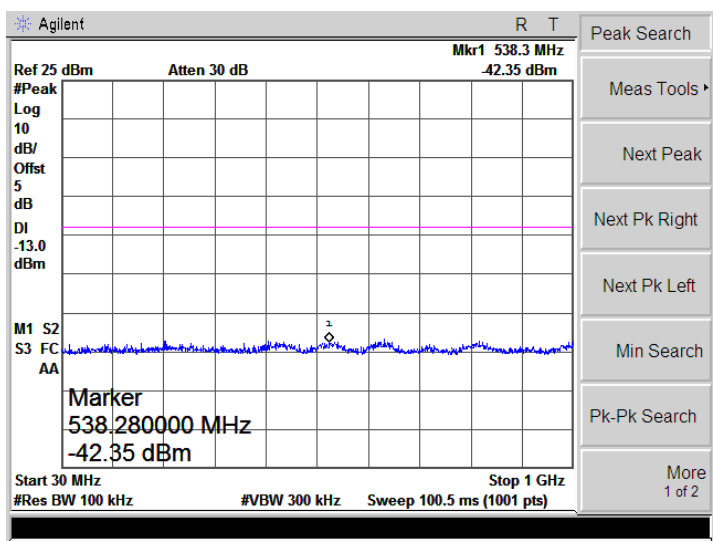




HSDPA Band II-Low

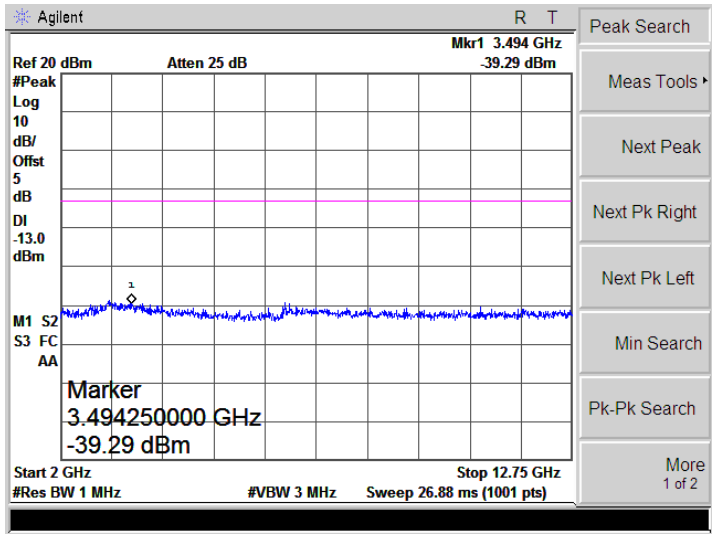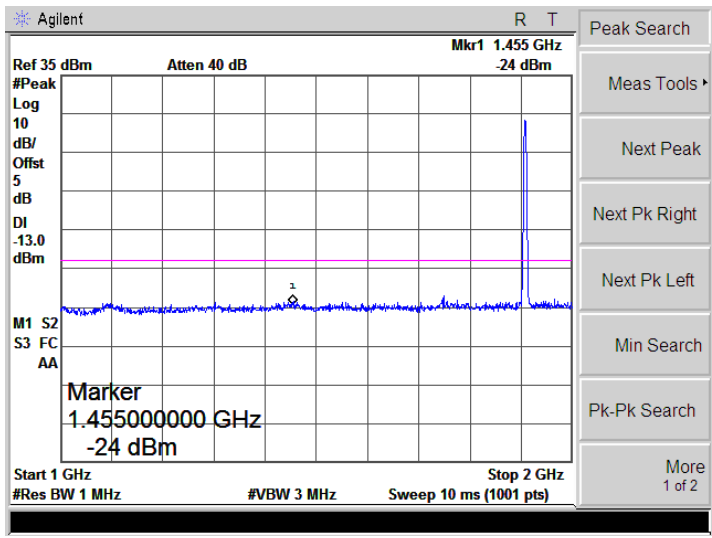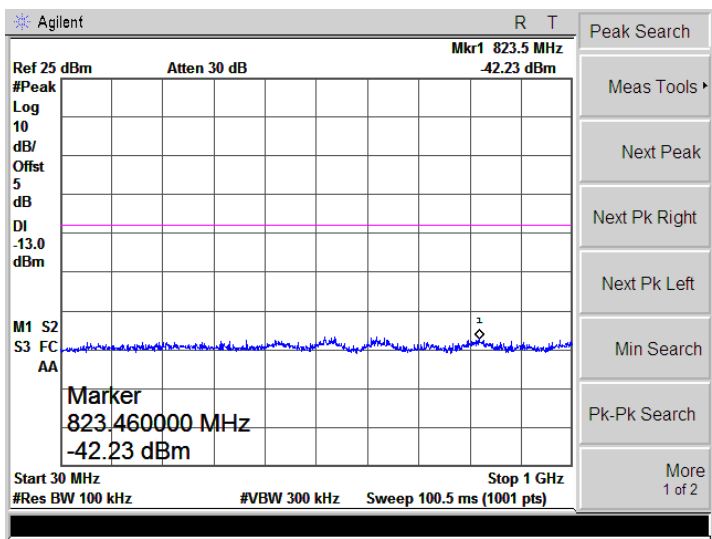




Bandedge

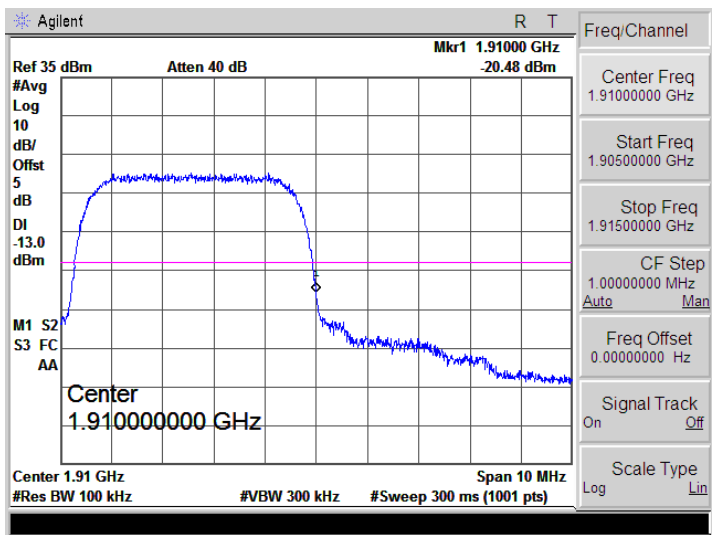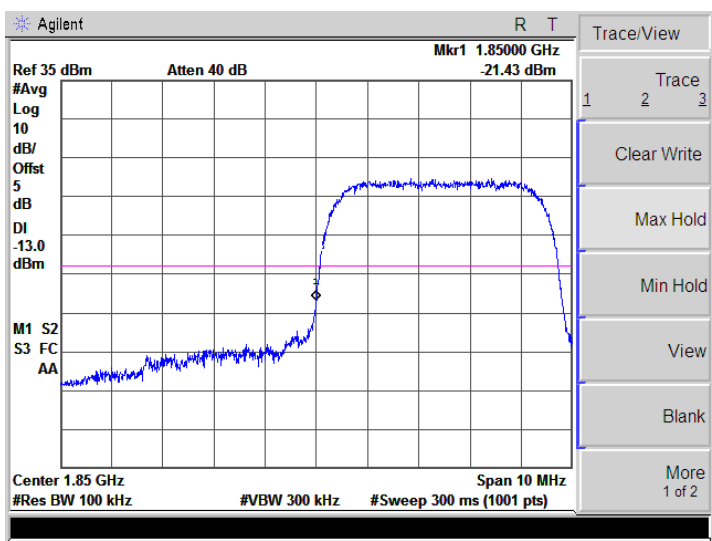




HSUPA Band II-Low

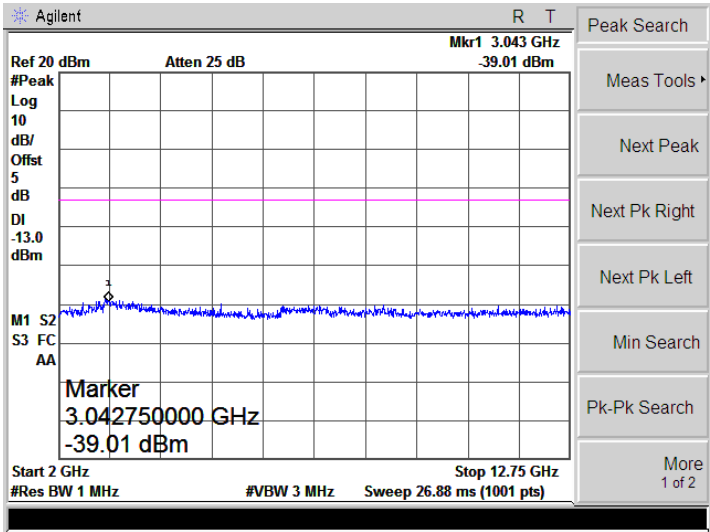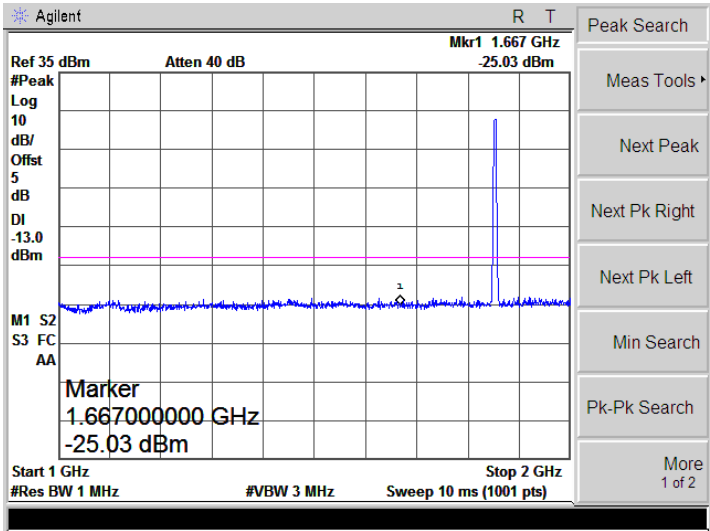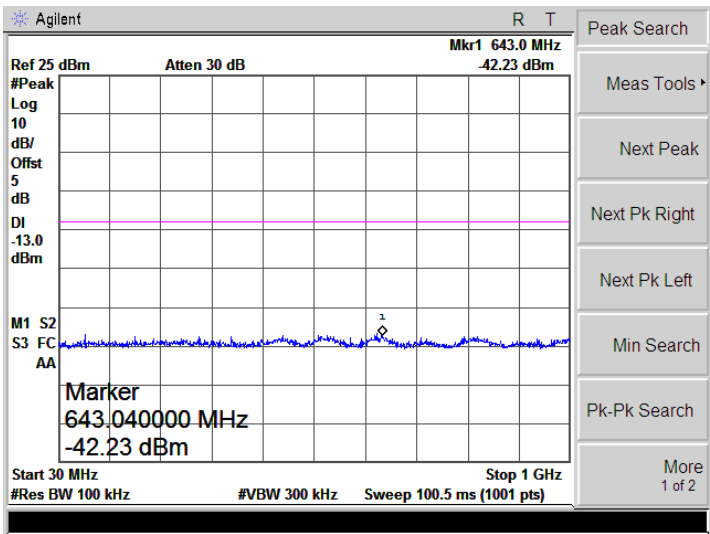



HSUPA Band II-Low

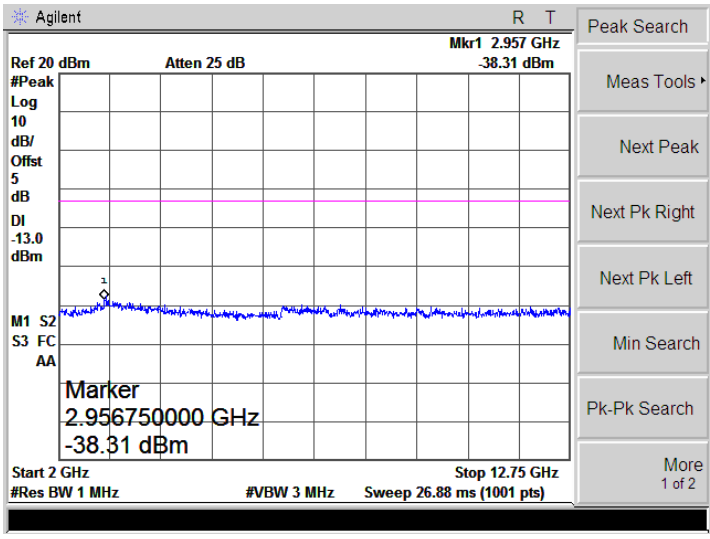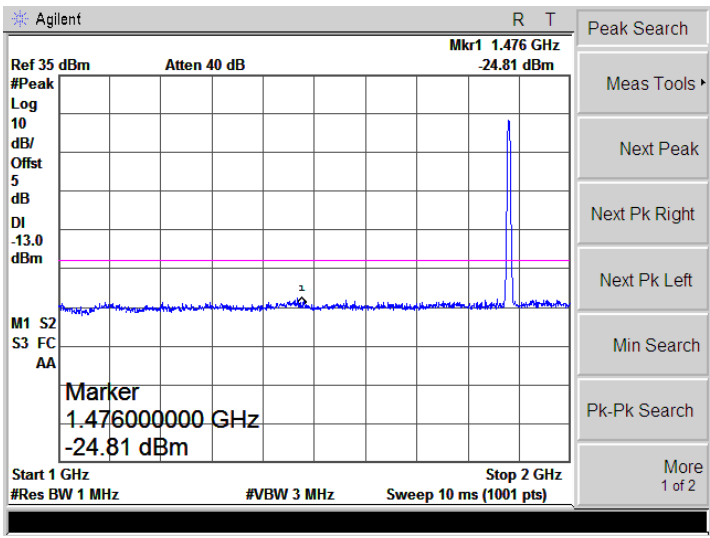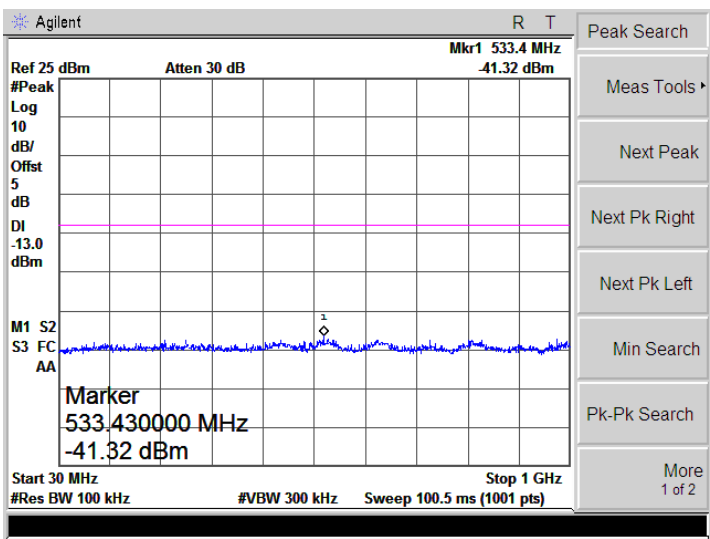

HSUPA Band II-Low

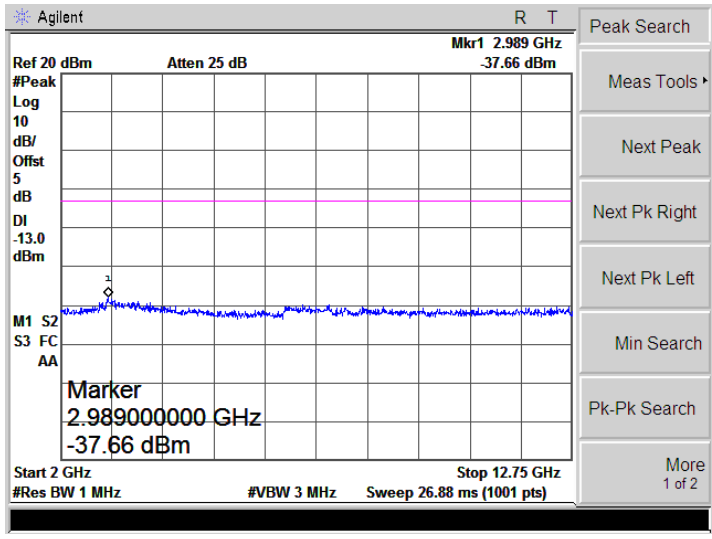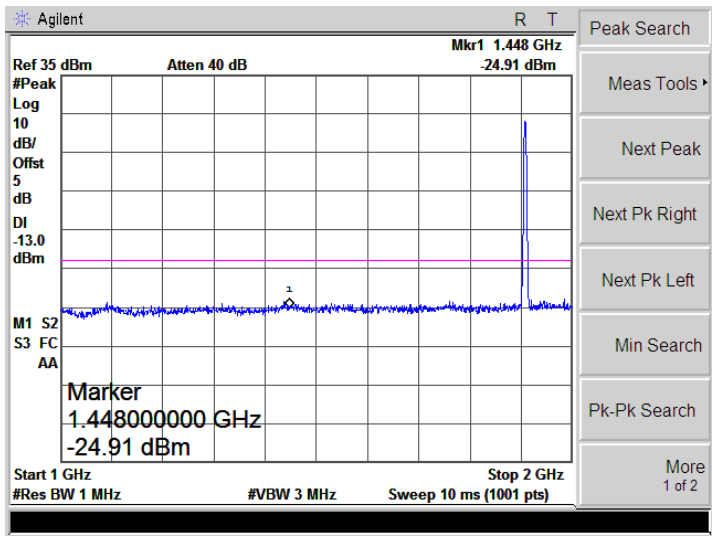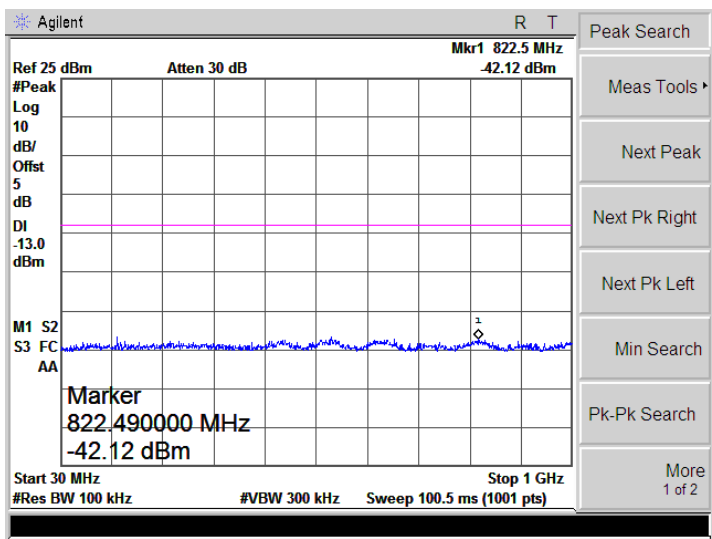

Bandedge

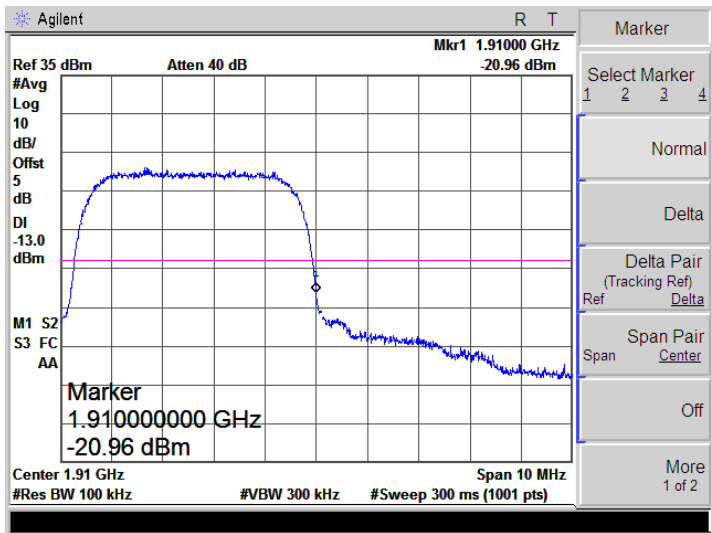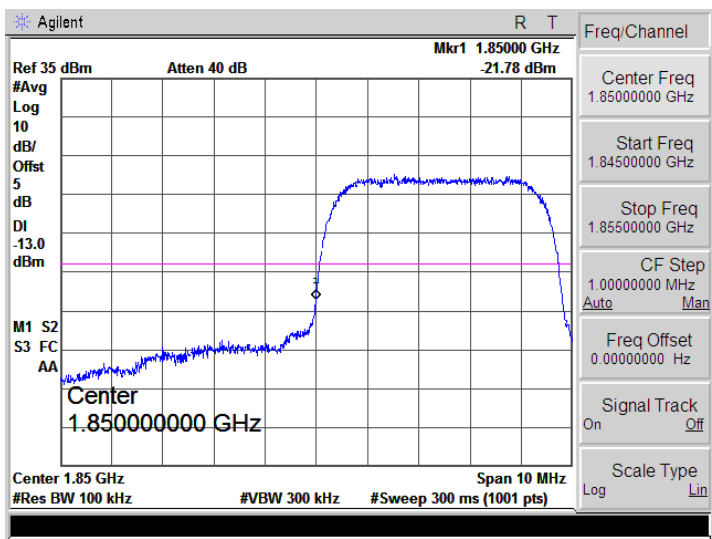

APPENDIX E

Frequency Stability

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.8V; Low Voltage LV=DC3.5V; High Voltage HV=DC4.35V

➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	64	0.0763	2.50	Pass
	-20	58	0.0690		
	-10	51	0.0607		
	0	45	0.0533		
	10	39	0.0469		
	20	34	0.0405		
	30	42	0.0497		
	40	48	0.0579		
	50	55	0.0662		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	69	0.0368	2.50	Pass
	-20	54	0.0286		
	-10	47	0.0250		
	0	41	0.0217		
	10	37	0.0196		
	20	29	0.0155		
	30	35	0.0188		
	40	39	0.0209		
	50	46	0.0245		


Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	63	0.0754	2.50	Pass
	-20	54	0.0644		
	-10	50	0.0598		
	0	46	0.0552		
	10	41	0.0487		
	20	35	0.0414		
	30	39	0.0469		
	40	45	0.0542		
	50	53	0.0634		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (℃)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	55	0.0295	2.50	Pass
	-20	45	0.0241		
	-10	35	0.0188		
	0	30	0.0160		
	10	25	0.0135		
	20	22	0.0115		
	30	26	0.0139		
	40	31	0.0164		
	50	35	0.0184		


➤ Frequency stability V.S. Voltage measurement


Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	39	0.0469	2.50	Pass
	NV	33	0.0395		
	LV	28	0.0340		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	45	0.0241	2.50	Pass
	NV	41	0.0217		
	LV	33	0.0176		
Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	23	0.0276	2.50	Pass
	NV	31	0.0368		
	LV	36	0.0432		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	36	0.0192	2.50	Pass
	NV	40	0.0213		
	LV	44	0.0233		

APPENDIX F

Modulation characteristics

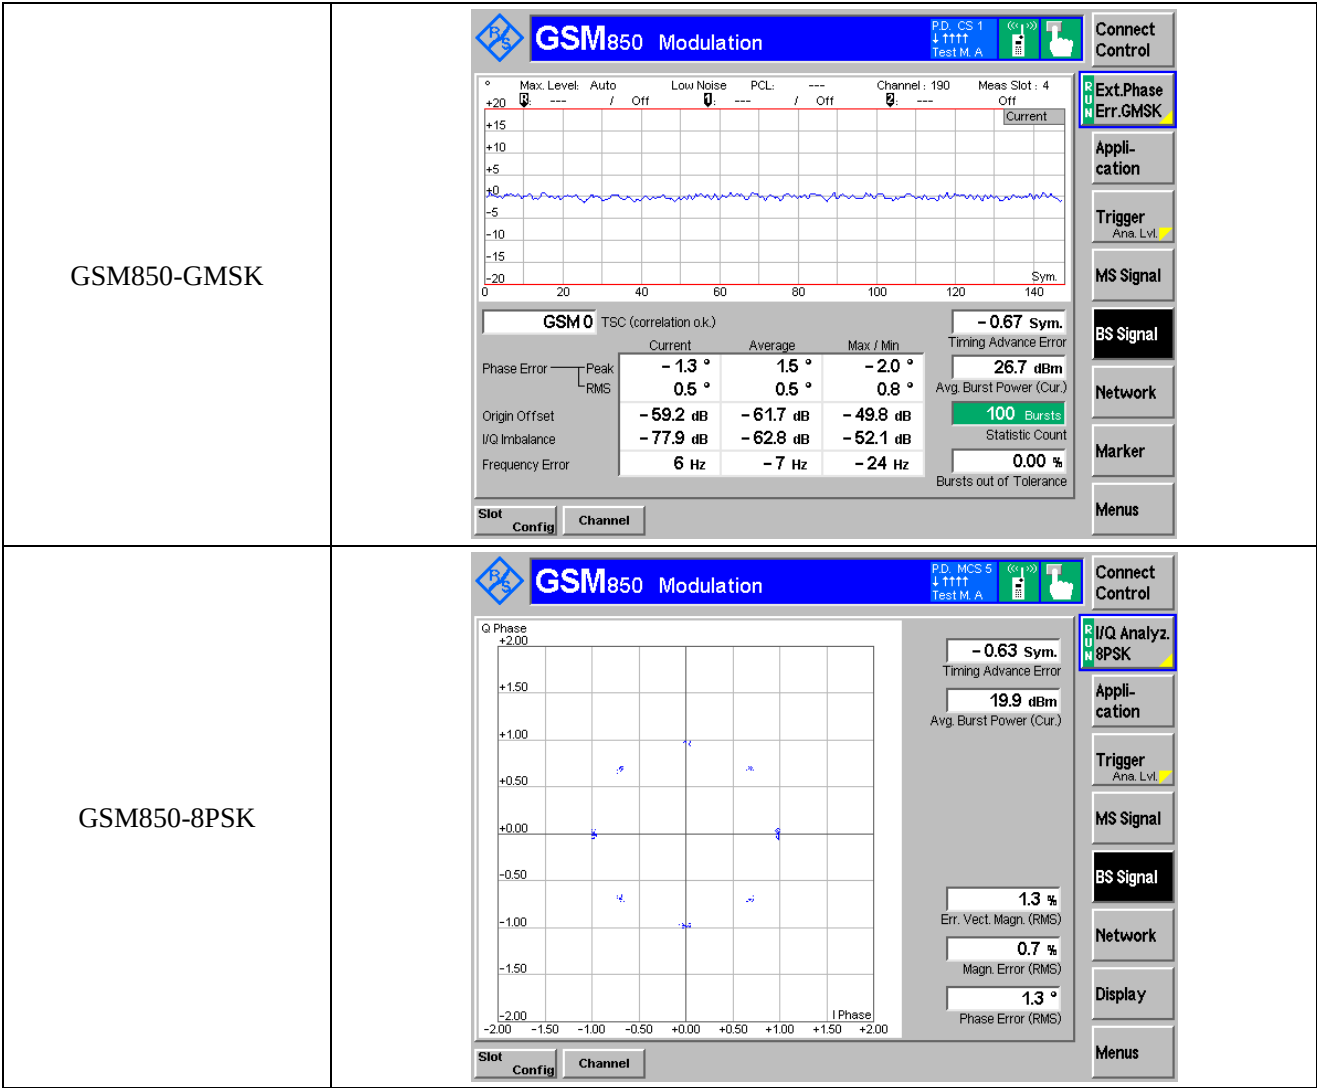

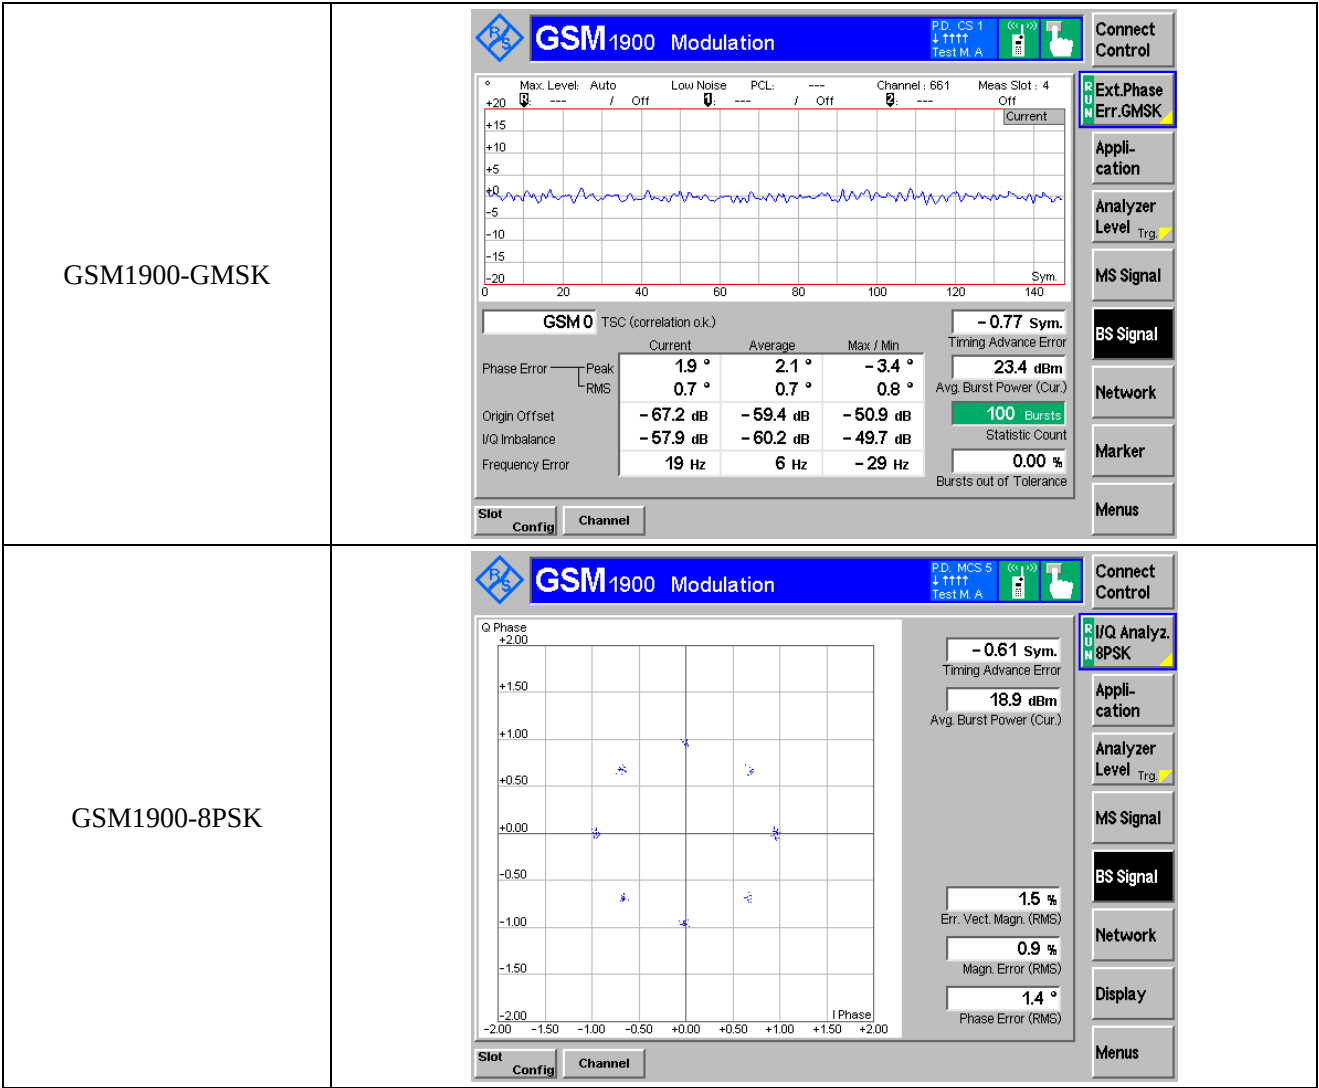

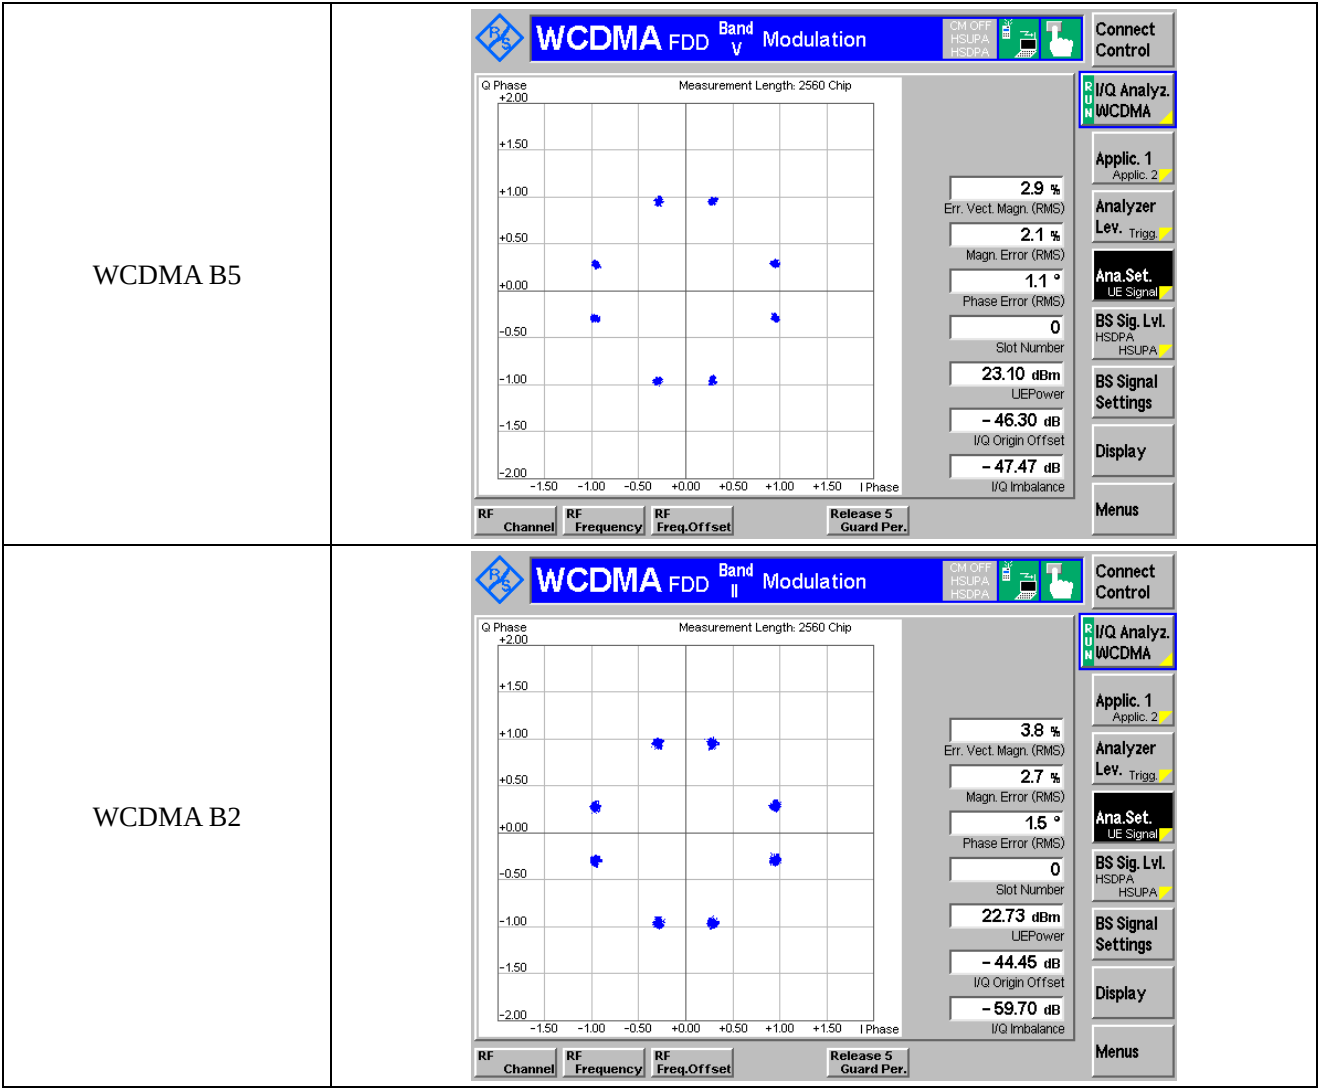

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******