

| <b>TEST REPORT</b>   |  |
|--|--|
| <b>Report Number..... :</b>  | 90127-22-72-22-PP002   |
| <b>Date of issue .....</b>   | Mar.02.2022  |
| <b>Tested by (+signature) .....</b>  | Duke <i>Duke Chen</i>  |
| <b>Approved by (+signature).... :</b>  | Jason <i>Jason gao</i>   |
| <b>Testing Laboratory name .....</b>   | SLG-CPC Testlaboratory Co., Ltd.   |
| <b>Address..... :</b>  | No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117             |
| <b>Applicant's name .....</b>  | DongGuanShi WeizhiChuang Technology Co., Ltd   |
| <b>Address..... :</b>  | 2/F, NO.3, Zhangyang Fuda 1st Road Zhangmutou Town,DongGuanShi                                   |
| <b>Manufacturer's name .....</b>   | DongGuanShi WeizhiChuang Technology Co., Ltd   |
| <b>Address..... :</b>  | 2/F, NO.3, Zhangyang Fuda 1st Road Zhangmutou Town,DongGuanShi                                   |
| <b>Factory's name .....</b>  | DongGuanShi WeizhiChuang Technology Co., Ltd   |
| <b>Address..... :</b>  | 2/F, NO.3, Zhangyang Fuda 1st Road Zhangmutou Town,DongGuanShi                                   |
| <b>Standard(s) .....</b>   | FCC Part 1(1.1310) and Part 2(2.1091)<br>KDB 680106 D01 RF Exposure Wireless Charging App v03r01 |
| <b>Test item description..... :</b>  | Fast Wireless Charger  |
| <b>Trade Mark..... :</b>   | /  |
| <b>Model/Type reference .....</b>  | B16  |
| <b>FCC ID .....</b>  | 2A4WMWZC-B16   |
| <b>Date of receipt of test item .. :</b>   | Feb.16.2022  |
| <b>Date (s) of performance of test..... :</b>  | Feb.16.2022 to Feb.26.2022   |
| <b>Summary of Test Results..... :</b>  | <b>Pass</b>  |
| The Summary of Test Results based on a technical opinion belongs to the standard(s).   |  |
| <b>General disclaimer:</b><br>This report shall not be reproduced except in full, without the written approval of SLG-CPC Testlaboratory Co., Ltd. The test results in the report only apply to the tested sample. |  |

## TABLE OF CONTENT

|  |    |
|--|----|
| 1. SUMMARY OF TEST RESULT .....              | 3  |
| 2. GENERAL INFORMATION .....                 | 4  |
| 2.1. DESCRIPTION OF DEVICE (EUT).....        | 4  |
| 2.2. DESCRIPTION OF TEST MODES .....         | 5  |
| 2.3. DESCRIPTION OF SUPPORT DEVICE .....     | 5  |
| 2.4. DESCRIPTION OF TEST FACILITY .....      | 5  |
| 3. MEASURING DEVICE AND TEST EQUIPMENT ..... | 6  |
| 3.1. FOR MPE MEASUREMENT .....               | 6  |
| 4. RF EXPOSURE .....                         | 7  |
| 4.1. MEASURING STANDARD.....                 | 7  |
| 4.2. REQUIMENTS.....                         | 7  |
| 4.3. TEST CONFIGURATION .....                | 8  |
| 4.4. BLOCK DIAGRAM OF TEST SETUP.....        | 8  |
| 4.5. LIMITS.....                             | 9  |
| 4.6. MEASURING RESULTS .....                 | 10 |

**1. SUMMARY OF TEST RESULT**

| <b>EMISSION</b>                                  |   |         |
|--|---|---------|
| Description of Test Item                         | Standard & Limits   | Results |
| MPE  | FCC Part 1(1.1310) and Part 2(2.1091)<br>KDB 680106 D01 RF Exposure Wireless<br>Charging App v03r01 | Pass    |
| Note: N/A is an abbreviation for Not Applicable. |   |         |

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

|                         |  |
|-------------------------|--|
| Product Name            | Fast Wireless Charger  |
| Trade Name              | /  |
| Model Name              | B16  |
| Series Model            | N/A  |
| Output                  | Wireless Output1: Phone 5W/7.5W/10W<br>Wireless Output2: Watch 2W<br>Wireless Output3: Earphones: 5W |
| Operation frequency     | 115-205KHz   |
| Modulation Type         | MSK  |
| Antenna Type            | Inductive Loop Antenna with 0dBi   |
| Power Supply            | Input: DC 5V or 9V form Adapter  |
| Hardware version number | V1.0   |
| Software version number | V1.0   |
| Connecting I/O Port(s)  | Please refer to the User's Manual  |

## 2.2. Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

| Mode:  | TEST MODE DESCRIPPTION   |
|--|--|
| 1.   | AC/DC Adapter + EUT + Mobile Phone(10W) + Earphone (5W) + Watch (2W) |
| 2.   | AC/DC Adapter + EUT + Mobile Phone(15W) + Watch (2W)                 |
| 3.   | AC/DC Adapter + EUT + Mobile Phone(15W) + Earphone (5W)              |
| 4.   | AC/DC Adapter + EUT + Watch (3W)                                     |
| 5.   | AC/DC Adapter + EUT + Earphone (5W)                                  |
| 6.   | AC/DC Adapter + EUT + Mobile Phone(5W)                               |
| 7.   | AC/DC Adapter + EUT + Mobile Phone(7.5W)                             |
| 8.   | AC/DC Adapter + EUT + Mobile Phone(10W)                              |
| Note:<br>All test modes were pre - tested, but we only recorded the worst case in this report. |  |

## 2.3. Description of Support Device

| No. | Equipment    | Trade name  | Model        | S/N | Power Cord |
|-----|--------------|-------------|--------------|-----|------------|
| 1.  | Mobile phone | HUAWEI      | Mare 30      |     |            |
| 2.  | Adapter      | HUAWEI      | HW-200675CD1 |     |            |
| 3.  | Watch        | XIAOMI      | DL03         |     |            |
| 4.  | Earphone     | Airpors Pro | A2190        |     |            |

## 2.4. Description of Test Facility



### Site Description

EMC Lab. :  
 Accredited by FCC, October 04 2021  
 Designation Number: CN0126  
 Test Firm Registration Number: 27767  
 Accredited by A2LA, October 04 2021  
 The Certificate Registration Number is 6325.01

Name of Firm : SLG-CPC Testlaboratory Co., Ltd.  
 Site Location : No. 11, Wu Song Road, Dongcheng District, Dongguan,  
 Guangdong Province, China 523117

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For MPE Measurement

| Used  | Equipment                  | Manufacturer | Model No. | Serial No. | Last Cal.    | Cal. Interval |
|---|----------------------------|--------------|-----------|------------|--------------|---------------|
|  | E-Field Probe(100kHz-3GHz) | WG           | AC-0013   | 2244/90.20 | May 09, 2021 | 1 Year        |
|  | Exposure Level Tester      | WG           | EMR-20    | 2244/20    | May 09, 2021 | 1 Year        |

## 4. RF EXPOSURE

### 4.1. Measuring Standard

FCC Part 1(1.1310) and Part 2(2.1091)

### 4.2. Requirments


Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- o Fixed Installations: fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- o Mobile Devices: a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- o Portable Devices: a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093). The FCC also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows: Occupational/Controlled Exposure: In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks. General Population/Uncontrolled Exposure: The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

#### 4.3. Test configuration

- 1, The field strength of both E-field and H-field was measured at 15cm (the 15 cm measured from the center of the probe(s) to the edge of the device) using the equipment list above for determining compliance with the MPE requirements of FCC Part 1.1310.
- 2, The RF power density was measured at 3 different charge conditions: min load, mid load, max load.
- 3, Maximum E-field and H-field measurements were made 15cm from each side of the EUT. Along the side of the EUT and still 15cm away from the edge of the EUT, the field probes were positioned at the location where there is maximum field strength. The maximum E-field and H-field is reported below.
- 4, This device uses a wireless charging circuit for power transfer operating at the frequency of 115 – 205kHz. Thus, the 300kHz limits were used: E-field Limit = 614 (V/m); H-field limit = 1.63 (A/m).
5. The EUT were measured according to the dictates of KDB 680106D01v03

#### 4.4. Block Diagram of Test Setup

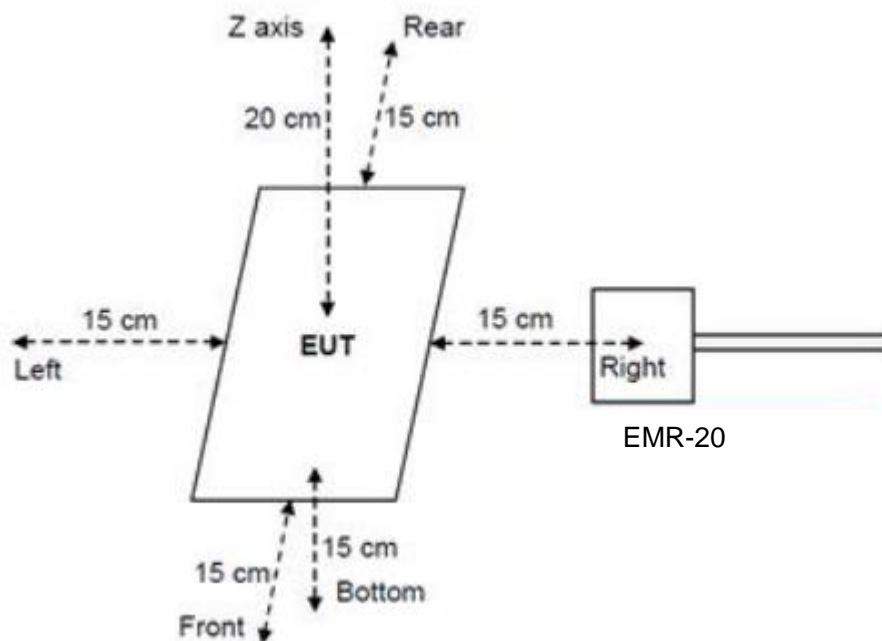



#### 4.5. Limits

##### (A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6  |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6  |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6  |
| 300-1500              |                                   |                                   | F/300                                    | 6  |
| 1500-100,000          |                                   |                                   | 5  | 6  |

##### (B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30   |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30   |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30   |
| 300-1500              |                                   |                                   | F/1500                                   | 30   |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30   |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

#### 4.6. Measuring Results

##### Result:

a) Power transfer frequency is less than 1 Mhz.

Yes, The device operates in the frequency 115Khz-205khz.

b) Output power from each primary coil is less than or equal to 15watts.

Yes, The maximum output power of the primary coil is  $\text{Max } 10\text{W} \leq 15\text{W}$ .

c) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

Yes, The transfer system including a charging system with only single primary coils is to detect and allow only between individual of coils.

d) Client device is placed directly in contact with the transmitter.

Yes, Client device is placed directly in contact with the transmitter.

e) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, Mobile exposure condition only.

f) The aggregate H-Field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface are less than 50% the MPE limit.

##### TEST Data:

*Test Mode: Mode A.1(100% Load)*

| Electric Field Emissions |                     |            |
|--------------------------|---------------------|------------|
| Test Position            | Measure Value (V/m) | Limit(V/m) |
| Top                      | 2.07                | 614        |
| Left                     | 2.00                | 614        |
| Right                    | 2.16                | 614        |
| Rear                     | 2.23                | 614        |
| Front                    | 2.02                | 614        |
| Bottom                   | 1.78                | 614        |
| Magnetic Field Emissions |                     |            |
| Test Position            | Measure Value (A/m) | Limit(A/m) |
| Top                      | 0.0639              | 1.63       |
| Left                     | 0.0599              | 1.63       |
| Right                    | 0.0823              | 1.63       |
| Rear                     | 0.0782              | 1.63       |
| Front                    | 0.0707              | 1.63       |
| Bottom                   | 0.0702              | 1.63       |

*Test Mode: Mode A.1(50% Load)*

| Electric Field Emissions |                     |            |
|--------------------------|---------------------|------------|
| Test Position            | Measure Value (V/m) | Limit(V/m) |
| Top                      | 2.11                | 614        |
| Left                     | 2.24                | 614        |
| Right                    | 2.13                | 614        |
| Rear                     | 1.58                | 614        |
| Front                    | 2.25                | 614        |
| Bottom                   | 2.01                | 614        |
| Magnetic Field Emissions |                     |            |
| Test Position            | Measure Value (A/m) | Limit(A/m) |
| Top                      | 0.0851              | 1.63       |
| Left                     | 0.0593              | 1.63       |
| Right                    | 0.0868              | 1.63       |
| Rear                     | 0.0804              | 1.63       |
| Front                    | 0.0779              | 1.63       |
| Bottom                   | 0.0803              | 1.63       |

*Test Mode: Mode A.1(10% Load)*

| Electric Field Emissions |                     |            |
|--------------------------|---------------------|------------|
| Test Position            | Measure Value (V/m) | Limit(V/m) |
| Top                      | 1.58                | 614        |
| Left                     | 1.64                | 614        |
| Right                    | 1.74                | 614        |
| Rear                     | 1.76                | 614        |
| Front                    | 1.50                | 614        |
| Bottom                   | 1.52                | 614        |
| Magnetic Field Emissions |                     |            |
| Test Position            | Measure Value (A/m) | Limit(A/m) |
| Top                      | 0.0138              | 1.63       |
| Left                     | 0.0176              | 1.63       |
| Right                    | 0.0186              | 1.63       |
| Rear                     | 0.0166              | 1.63       |
| Front                    | 0.0193              | 1.63       |
| Bottom                   | 0.0167              | 1.63       |

THE END