Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1810270FV00 FCC ID: ATI9R3SBA71012



RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant	: Action Electronics Co.,Ltd.		
Address	: 2480, TINGKAT PERUSAHAAI 13600, PERAI,, PENANG, Mal	N ENAM,PRAI FREE TRADE ZONE, aysia	
Manufacturer /Factory	: ACTION ASIA (SHENZHEN) C	CO., LTD	
Address	: 4 Floor, Block 1, No.25 Jinxing Town, Bao'an District, Shenzhe	l Industrial Park, Jian'an Road, Fuyong en, China	
E.U.T.	: 10.1" IN-CAR SEATBACK MO	NITOR	
Brand Name	: VOXX, moviestoGO, Audiovox		
Model No.	SB10M1, SBA71012, SBB710 (For model difference, refer to		
FCC ID	: ATI9R3SBA71012		
Measurement Standard	: FCC PART 15.247: 2017		
Date of Receiver	: October 12, 2018		
Date of Test	: October 12, 2018 to October 2	6, 2018	
Date of Report	: October 26, 2018		
This Test Report is Issu	ed Under the Authority of :		
Prepa	ared by	Approved & Authorized Signer	
Rose Hu / Engineer This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.			
TEL: +86-769-22022444 FAX: +86-769-22022799 Web: www.ntc-c.com Address: Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District,			
Dongguan City, Guangdong, China			

Dongguan City, Guangdong, China

Page 1 of 43



Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TE	ST5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	
1.4 Equipment Modifications	
1.5 SUPPORT DEVICE	
1.6 TEST FACILITY AND LOCATION	
1.7 SUMMARY OF TEST RESULTS	
2. SYSTEM TEST CONFIGURATION	
2.1 EUT CONFIGURATION	10
2.2 Special Accessories	
2.3 DESCRIPTION OF TEST MODES	
2.4 EUT Exercise	
3. CONDUCTED EMISSIONS TEST	
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATIO	N)11
3.2 Test Condition	11
3.3 Measurement Results	11
4. MAX. CONDUCTED OUTPUT POWER	
4.1 Measurement Procedure	
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATIO	N)12
4.3 MEASUREMENT RESULTS	12
5. 6DB&20DB BANDWIDTH	
5.1 Measurement Procedure	
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATIO	
5.3 MEASUREMENT RESULTS	
6. POWER SPECTRAL DENSITY	
6.1 MEASUREMENT PROCEDURE	21
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATIO	
6.3 MEASUREMENT RESULTS	
7. BAND EDGE AND CONDUCTED SPURIOUS E	EMISSIONS
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	28
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATIO	-
7.3 MEASUREMENT RESULTS	



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS	25
0. RADIATED SPORIOUS LIVISSIONS AND RESTRICTED DAINDS	
8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	35
8.2 MEASUREMENT PROCEDURE	
8.3 LIMIT	
8.4 MEASUREMENT RESULTS	
9. ANTENNA APPLICATION	42
9.1 ANTENNA REQUIREMENT	42
9.2 MEASUREMENT RESULTS	42
10. TEST EQUIPMENT LIST	43



Revision History of This Test Report

Report Number	Description	Issued Date
NTC1810270FV00	Initial Issue	2018-10-26



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Product Name	: 10.1" IN-CAR SEATBACK MONITOR
Main Model Name	: SB10M1
Additional Model Name	: SBA71012, SBB71013, SB10UHD
Model difference	: These models have the same circuity, electrical mechanical, PCB layout and physical construction. The difference in model number.
Power Supply	: DC 12V come from vehicle power supply
Adapter	: N/A
Test voltage	: DC 12V battery
Hardware version	: V1.0
Software version	: V1.0
Serial number	: N/A
Note	: All tests were carried on model SB10M1.
Technical parameters	

For WIFI Function

Frequency Range	:	2412-2462MHz for 802.11b/g/n(HT20)
Modulation	:	CCK, DQPSK, DBPSK for 802.11b OFDM for 802.11g/n(HT20)
Number of Channel	:	11 for 802.11b/g/n(HT20)
Channel space	:	5MHz
Date Rate	:	802.11b:1~11Mbps 802.11g:6~54Mbps n20: 6.5~72.2Mbps
Antenna Type	:	PCB Antenna
Antenna Gain	:	0 dBi



WIFI Channel List

802.11 b/g/n(HT20)				
Channel	Frequency MHz	Channel	Frequency MHz	
1	2412	7	2442	
2	2417	8	2447	
3	2422	9	2452	
4	2427	10	2457	
5	2432	11	2462	
6	2437			

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)			
Channel Frequency MHz			
1	2412		
6	2437		
11	2462		

Test SW version	RFTestTool
-----------------	------------



1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **ATI9R3SBA71012** filing to comply with Section 15.247 of the FCC Part 15(2016), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

N/A



1.6 Test Facility and Location

Site Description EMC Lab	: Listed by CNAS, August 13, 2018 The certificate is valid until August 13, 2024 The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 The Certificate Registration Number is L5795.
	Listed by A2LA, November 01, 2017 The certificate is valid until December 31, 2019 The Laboratory has been assessed and proved to be in compliance with ISO17025 The Certificate Registration Number is 4429.01
	Listed by FCC, November 06, 2017 The Designation Number is CN1214 Test Firm Registration Number: 907417
Name of Firm	Listed by Industry Canada, June 08, 2017 The Certificate Registration Number. Is 46405-9743 Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Site Location	: Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District, Dongguan City, Guangdong Province, China



1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Conducted Emission	±1.06dB	N/A
§15.247(b)(3)	Max. Conducted Output Power	±1.06dB	Compliant
§15.247(a)(2)	6dB Bandwidth	±1.42 x10 ⁻⁴ %	Compliant
§15.247(e)	Power Spectral Density	±1.06dB	Compliant
§15.247(d)	Band Edge and Conducted Spurious Emissions	±1.70dB & ±2.51dB	Compliant
§15.247(d),§15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	±3.70dB	Compliant
§15.203	Antenna Requirement		Compliant

Note: The EUT powered by DC 12V come from vehicle power source, therefore the AC Power Conducted Emission is not applicable.



2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested. But only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.



3. Conducted Emissions Test

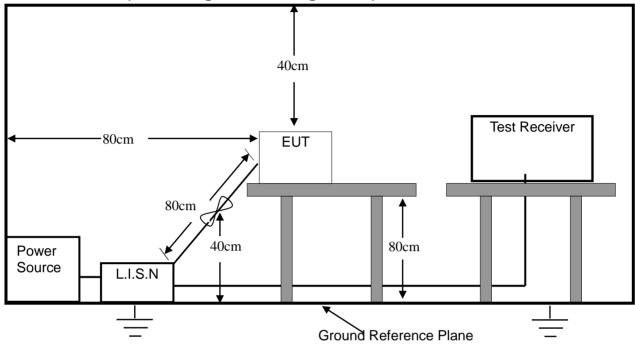

3.1 Test SET-UP (Block Diagram of Configuration)

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: WIFI Link

3.3 Measurement Results

Not applicable.



4. Max. Conducted Output Power

4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results

Pass

Please refer to following table and plots.



Temperature :	24 ℃	Humidity :	50%	
Test By:	Sance	Test Date :	October 22, 2018	
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	Peak Output Power dBm		Limit dBm
IEEE	802.11b Mode (CC	K, Antenna Gain	=0dBi)	
Low Channel: 2412	1	15.	02	30
Middle Channel: 2437	1	14.	69	30
High Channel: 2462	1	14.66		30
IEEE	802.11g Mode (OFE	OM, Antenna Gair	n=0dBi)	
Low Channel: 2412	6	14.	47	30
Middle Channel: 2437	6	14.3	34	30
High Channel: 2462	6	14.	70	30
IEEE 802.11n(HT20) Mode (OFDM, Antenna Gain=0dBi)				
Low Channel: 2412	6.5	14.	59	30
Middle Channel: 2437	6.5	14.	52	30
High Channel: 2462	6.5	14.	90	30

Note: CCK was the worst ase of the 802.11b.



5. 6dB Bandwidth

5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v05):

- 1. Set resolution bandwidth (RBW) = 100kHz
- 2. Set the video bandwidth (VBW) \ge 3 x RBW, Detector = Peak.
- 3. Trace mode = max hold.
- 4. Sweep = auto couple.

5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.2 Test SET-UP (Block Diagram of Configuration)



5.3 Measurement Results

Pass

Please refer to following table and plots.



Temperature :	24 ℃	Humidity : 50 %		
Test By:	Sance	Test Date : October	22, 2018	
Test Result:	PASS			
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit	
	IEEE 802.11b	Mode (CCK)		
Low Channel: 2412	1	7.550	>500KHz	
Middle Channel: 2437	1	7.572	>500KHz	
High Channel: 2462	1	7.559	>500KHz	
	IEEE 802.11g N	/lode (OFDM)		
Low Channel: 2412	6	16.30	>500KHz	
Middle Channel: 2437	6	16.34	>500KHz	
High Channel: 2462	6	16.28	>500KHz	
	IEEE 802.11n(HT2	0) Mode (OFDM)		
Low Channel: 2412	6.5	17.16	>500KHz	
Middle Channel: 2437	6.5	17.55	>500KHz	
High Channel: 2462	6.5	17.28	>500KHz	

Note: CCK was the worst ase of the 802.11b.






802.11b Low Channel

802.11b Middle Channel






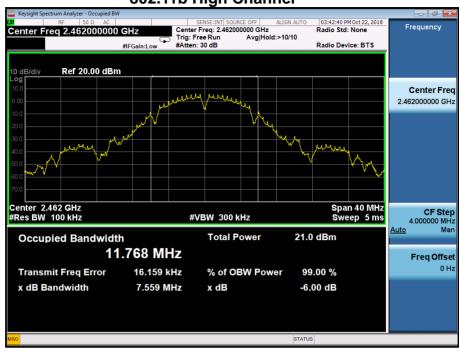

802.11b High Channel

802.11g Low Channel

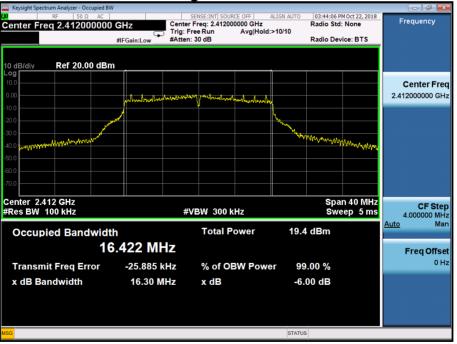






802.11g Middle Channel

802.11g High Channel

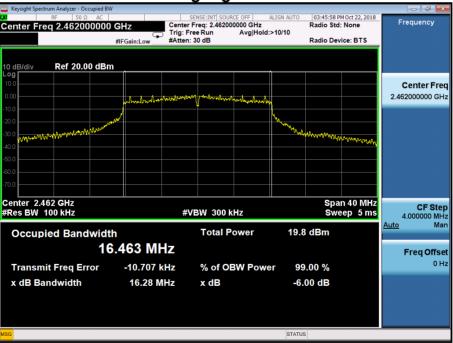






802.11n(HT20) Low Channel

802.11n(HT20) Middle Channel





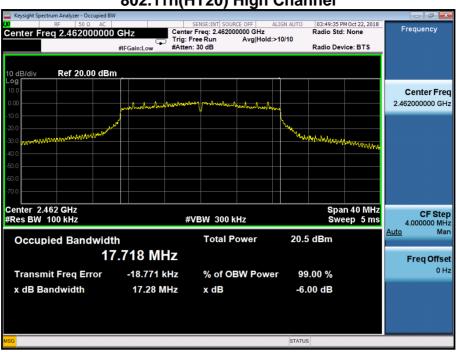

802.11n(HT20) High Channel



6. Power Spectral Density

6.1 Measurement Procedure

Power Spectral Density, FCC Rule 15.247(e):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v05):

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times the DTS bandwidth.
- 3. Set the RBW to: 3 kHz≤RBW≤100KHz
- 4. Set the VBW \ge 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level within the RBW.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Results

Pass

Please refer to following table and plots.



Temperature :	24 ℃	Humidity :	50 %
Test By:	Sance	Test Date :	October 22, 2018
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm/3kHz	Limit dBm/3kHz
	IEEE 802.11b	Mode (CCK)	
Low Channel: 2412	1	-6.750	8
Middle Channel: 2437	1	-6.484	8
High Channel: 2462	1	-6.835	8
	IEEE 802.11g N	/lode (OFDM)	
Low Channel: 2412	6	-10.454	8
Middle Channel: 2437	6	-10.079	8
High Channel: 2462	6	-8.985	8
	IEEE 802.11n(HT2	0) Mode (OFDM)	
Low Channel: 2412	6.5	-9.846	8
Middle Channel: 2437	6.5	-10.292	8
High Channel: 2462	6.5	-9.981	8

Note: CCK was the worst ase of the 802.11b.





802.11b Low Channel

802.11b Middle Channel








802.11b High Channel

802.11g Low Channel






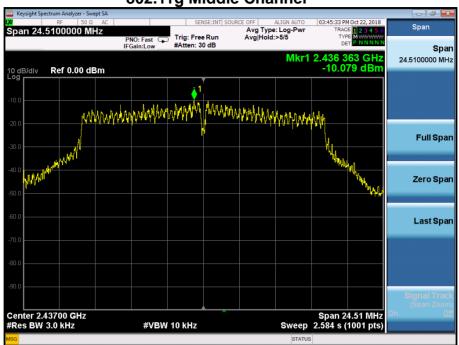


802.11g Middle Channel

802.11g High Channel

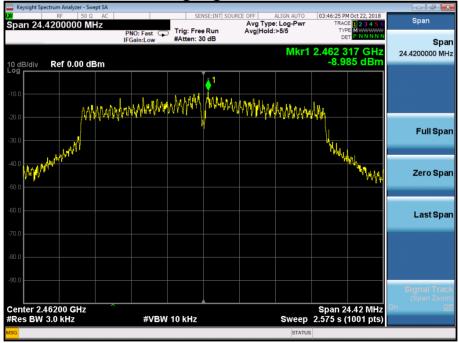




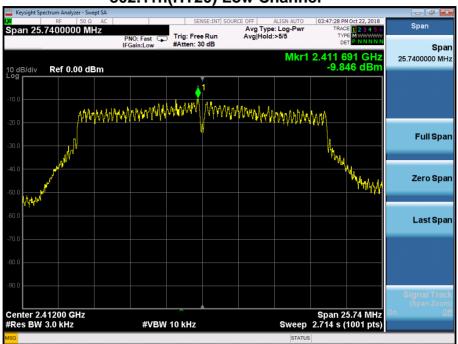

802.11n(HT20) Low Channel

802.11n(HT20) Middle Channel

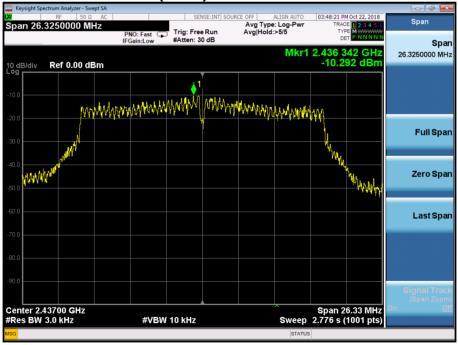





802.11n(HT20) High Channel



7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below.

MEASUREMENT PROCEDURE REF

- 1. Set the RBW = 100 kHz.
- 2. Set the VBW \geq 300 kHz.
- 3. Detector = peak.
- 4. Sweep time = auto couple.
- 5. Trace mode = max hold.
- 6. Allow trace to fully stabilize.

7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- 1. Set RBW = 100 kHz.
- 2. Set VBW ≥ 300 kHz.
- 3. Detector = peak.
- 4. Sweep = auto couple.
- 5. Trace Mode = max hold.
- 6. Allow trace to fully stabilize.
- 7. Use the peak marker function to determine the maximum amplitude level.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Results

The test plots and table showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.

Dongguan Nore Testing Center Co., Ltd. Report No.: NTC1810270FV00 FCC ID: ATI9R3SBA71012



Band Edge 802.11b Low Channel



802.11b High Channel







802.11g Low Channel

802.11g High Channel








802.11n(HT20) Low Channel

802.11n(HT20) High Channel

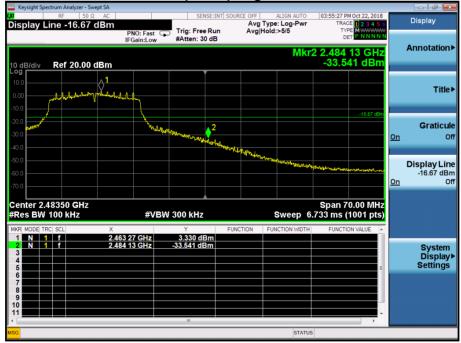



Conducted Spurious Emissions The worst case: 802.11n(HT20) Low Channel

Keysight Spectrum Analyzer - Sv					ALIGN AUTO				
۵ RF 50 Ω Display Line -10.04	at no			INT SOURCE OFF Avg Ty	/pe: Log-Pwr	TRAC	M Oct 22, 2018 E 1 2 3 4 5 6 E M WWWW		Display
		PNO: Fast C IFGain:Low	Trig: Free Ru #Atten: 30 dB	un Avg∣Ho B	ld:>5/5	TYP			
		II GUILLOW			Mkr	2 23.50	0 GHz		Annotation►
10 dB/div Ref 20.00	dBm					-41.2	24 dBm		
			1 Y						
10.0 Y									Title►
0.00							-10.04 dBm		
-10.0									
-20.0									Graticule
-30.0							²	<u>On</u>	Ofi
-40.0				an ale a sur la sur	a state of the second	and the second second	NAME OF TAXABLE		
-50.0		Nill Constant of the						1	Display Line
-60.0								On	-10.04 dBm Of
-70.0									
Start 1.00 GHz						Stop 2	5.00 GHz		
#Res BW 1.0 MHz		#VB	W 3.0 MHz		Sweep 60				
MKR MODE TRC SCL	х	ļ	Y		FUNCTION WIDTH	FUNCTIO	ON VALUE		
1 N 1 f 2 N 1 f	2.41	11 2 GHz 00 0 GHz	9.957 dBm -41.224 dBm						Sustam
3									System Display▶
5							=		Settings
6 7									
8									
10									
11							-		
			m				P I		
ISG			III		STATU	s	•		
ISG	wept SA		m		STATUS	S	•		
Keysight Spectrum Analyzer - Sv	Ω AC				ALIGN AUTO	04:01:05 P	MOct 22, 2018	P	eak Search
	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho		04:01:05 Pl TRAC TYF	CE 1 2 3 4 5 6 PE M WWWW	P	
RF 50 ۵	Ω AC DOOOO M		SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PI TRAC TYF DE	E 1 2 3 4 5 6 E MWWWWW F P N N N N N	P	eak Search
Marker 1 808.71600	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	T P NNNNN 72 MHz	P	eak Search
Marker 1 808.71600	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	E 1 2 3 4 5 6 E MWWWWW F P N N N N N	P	eak Search
Marker 1 808.71600	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	T P NNNNN 72 MHz		eak Search NextPeak
4 R= 50 £ Marker 1 808.71600	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	T P NNNNN 72 MHz		eak Search NextPeak
Marker 1 808.71600	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	T P NNNNN 72 MHz		eak Search NextPeak
0 0 08/01/00 000 10 dB/div Ref 20.00 0.00 0.00	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	1 2 3 4 5 6 M WWWWW P N N N N N 72 MHz 43 dBm		eak Search NextPeak
0 R€ 50.0 Narker 1 808.71600 10 dB/div Ref 20.00 -09 10.0 -00	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	1 2 3 4 5 6 M WWWWW P N N N N N 72 MHz 43 dBm	N	eak Search Next Peak ext Pk Right
0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	1 2 3 4 5 6 M WWWWW P N N N N N 72 MHz 43 dBm	N	eak Search Next Peak ext Pk Right
0	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	1 2 3 4 5 6 M WWWWW P N N N N N 72 MHz 43 dBm	N	eak Search Next Peak ext Pk Right
0 RE 50.3 Marker 1 808.71600 808.71600 10 dB/div Ref 20.00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00 -00	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	1 2 3 4 5 6 M WWWWW P N N N N N 72 MHz 43 dBm	N	Next Peak Next Peak ext Pk Right Next Pk Left
RE 50.3 Marker 1 808.71600 Ref 20.00 10 dB/div Ref 20.00 00 0.00 0.00 0.00 10.0 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.00	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PM TRAC TYF DE Kr1 808.	1 2 3 4 5 6 M WWWWW P NNNNN 72 MHz 43 dBm	N	eak Search Next Peal ext Pk Righ Next Pk Lef
RE 50 0 Marker 1 808.71600 100 10 dB/div Ref 20.00 0.00 0.00 <tr< td=""><td>Ω AC DOOOO M</td><td>DNO: Fret C</td><td>SENSE:</td><td>Avg Ty un Avg Ho</td><td>ALIGN AUTO /pe: Log-Pwr old:>5/5</td><td>04:01:05 PI TRAC DE kr1 808. -60.7</td><td>72 MHz 43 dBm -10.04 dBm</td><td>N</td><td>eak Search Next Peal ext Pk Righ Next Pk Lef</td></tr<>	Ω AC DOOOO M	DNO: Fret C	SENSE:	Avg Ty un Avg Ho	ALIGN AUTO /pe: Log-Pwr old:>5/5	04:01:05 PI TRAC DE kr1 808. -60.7	72 MHz 43 dBm -10.04 dBm	N	eak Search Next Peal ext Pk Righ Next Pk Lef
RE 50 0 Marker 1 808.71600 Ref 20.00 10 dB/div Ref 20.00 00 0.00 0.00 0.00	Ω AC DOOOO M	PNO: Fast C	Trig: Free Ru #Atten: 30 df	Avg Ty un Avg Ho	ALIGN AUTO rpe: Log-Pwr ld:>5/5 M	04:01:05 PI TTAG TTAG DE kr1 808. -60.7/	24 5 6 0 2 3 4 5 6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N	eak Search Next Peak ext Pk Righ Next Pk Lef Marker Delta
Ref 50 (300) Ilo dB/div Ref 20.00	2 AC 00000 M 0Bm	PNO: Fast C	SENSE:	Arg Ty an Avg He B	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Righ Next Pk Lef Marker Delta
0 RF 50 (2000) Marker 1 808,71600 1808,71600 0 0.00 10.0 0 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 0.00 0.00 10.0 50.0 0.00 10.0 50.0 0.00 10.0 50.0 0.00 10.0 50.0 0.00 10.0 51art 0.0300 GHz FRes BW 100 KHz MKR MODE TRC! SCL MKR MODE TRC! SCL <td>Ω AC D00000 M dBm H dBm <</td> <td>#VB</td> <td>SENSE: Trig: Free Rt #Atten: 30 df</td> <td>FUNCTION </td> <td>ALIGN AUTO rpe: Log-Pwr ld:>5/5 M</td> <td>04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7</td> <td>24 5 6 0 2 3 4 5 6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0</td> <td>N</td> <td>eak Search Next Peak ext Pk Righ Next Pk Lef Marker Delta</td>	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr ld:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	24 5 6 0 2 3 4 5 6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	N	eak Search Next Peak ext Pk Righ Next Pk Lef Marker Delta
Ref 50 0 Marker 1 808.71600 IO dB/div Ref 20.00 Og Io IO dB/div Ref 20.00 Og Io IO dB/div Ref 20.00 IO dag Io IO dag Io Start 0.0300 GHz Ref 20.00 GHz RMR MODE TRCI SCLI Io IO dag Io	Ω AC D00000 M dBm H dBm <	PNO: Fast C	Trig: Free Ru #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF
Ref So () Marker 1 808.71600 100 dB/div Ref 20.00 100 dB/div Ref 20.00 100 100 dB/div Ref 20.00	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Righ Next Pk Lef Marker Delta Mkr→CF
Ref So () Marker 1 808,71600 Ref 20.00 Log Log Log 10 dB/div Ref 20.00 Ref 20.00	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF
Ref So () Narker 1 808,71600 Log Ref 20.00 Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log Log <td>Ω AC D00000 M dBm H dBm <</td> <td>#VB</td> <td>SENSE: Trig: Free Rt #Atten: 30 df</td> <td>FUNCTION </td> <td>ALIGN AUTO rpe: Log-Pwr id:>5/5 M</td> <td>04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7</td> <td>P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm</td> <td>N</td> <td>eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF</td>	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF
0 RF 50 (Junch 10 BOR 100 (B/(div Ref 20.00) 00 00 00 00 10 000 000 000 000 10 0000 000 000 000	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lv More
Ref 50 0 Marker 1 808.71600 10 dB/div Ref 20.00 .09 .00 .00 .00 <tr< td=""><td>Ω AC D00000 M dBm H dBm <</td><td>#VB</td><td>SENSE: Trig: Free Rt #Atten: 30 df</td><td>FUNCTION </td><td>ALIGN AUTO rpe: Log-Pwr id:>5/5 M</td><td>04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7</td><td>P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm</td><td>N</td><td>eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lv More</td></tr<>	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTR4 TTR4 PE kr1 808. -60.7	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lv More
0 RF 50 (Junch 10 BOR 1000000000000000000000000000000000000	Ω AC D00000 M dBm H dBm <	#VB	SENSE: Trig: Free Rt #Atten: 30 df	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PI TTAC TTAC DE kr1 808. -60.7/	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	eak Search Next Peak ext Pk Right Next Pk Left Marker Delta Mkr→CF Mkr→Ref Lvl More
Ref 50 0 Marker 1 808.71600 10 dB/div Ref 20.00 .09 .00 .00 .00 <tr< td=""><td>Ω AC D00000 M dBm H dBm <</td><td>#VB</td><td>V 300 kHz</td><td>FUNCTION </td><td>ALIGN AUTO rpe: Log-Pwr id:>5/5 M</td><td> 04:01:05 PF Ттас DE kr1 808. -60.74 1 5 Stop 1.0 .00 ms (3 FUNCTIC</td><td>P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm</td><td>N</td><td></td></tr<>	Ω AC D00000 M dBm H dBm <	#VB	V 300 kHz	FUNCTION	ALIGN AUTO rpe: Log-Pwr id:>5/5 M	04:01:05 PF Ттас DE kr1 808. -60.74 1 5 Stop 1.0 .00 ms (3 FUNCTIC	P 0.2 4 5 6 WWWWWT P NNNN 72 MHz 43 dBm -1004 dBm	N	



		Midule	Channel		
Keysight Spectrum Analyzer - Sw RF 50 Ω		SENSE:INT SC	DURCE OFF ALIGN AUTO	03:57:30 PM Oct 22, 2018	
Display Line -10.15	dBm	Trin: Errs Dur	Avg Type: Log-Pwr Avg Hold:>5/5	TRACE 123456 TYPE M WWWW DET P NNNN	Display
	PNO: Fast IFGain:Lov		Avginola.2010	DET	
			Mkr2	2 24.106 4 GHz	Annotation
10 dB/div Ref 20.00	dBm			-39.802 dBm	
10.0 1		Ĭ			
0.00					Title
10.0				-10.15 dBm	
-20.0					Graticule
30.0				2	On Of
40.0					
50.0 State (State (State)	and the second	ومسأحاريه والأخاط والمسياد إماناتها	and the second secon		Display Line
60.0					-10.15 dBn
70.0					<u>On</u> Of
Start 1.00 GHz				Stop 25.00 GHz	
Res BW 1.0 MHz	#V	/BW 3.0 MHz	Sweep 60.	00 ms (30001 pts)	
MKR MODE TRC SCL	х	Y FI	UNCTION FUNCTION WIDTH	FUNCTION VALUE	
1 N 1 f 2 N 1 f	2.436 0 GHz 24.106 4 GHz	9.845 dBm -39.802 dBm			-
3	24.100 4 GHZ	-59.802 UBIII			System Display
4 5				=	Settings
6 7					
8					
10					
11					
•		m		• •	
<		III	STATUS	•	
SG Keysight Spectrum Analyzer - Sw				· · · · · · · · · · · · · · · · · · ·	
SG Keysight Spectrum Analyzer - Sw C RF 50 Ω	2 AC	III SENSE:INT SC		03:57:49 PM Oct 22, 2018 TRACE 1 2 3 4 5 6	Peak Search
SG Keysight Spectrum Analyzer - Sw C RF 50 Ω	2 AC 66667 MHz PNO: Fast	SENSE:INT SC	DURCE OFF ALIGN AUTO	03:57:49 PM Oct 22, 2018 TRACE 2 3 4 5 6 TYPE MUMMUM DET P NNNNN	
SG Keysight Spectrum Analyzer - Sw	2 AC	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE 123456 TYPE MWWWW DET PNNNNN	Peak Search
so keysight Spectrum Analyzer - Sw RF 50 Ω Aarker 1 846.80466	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE 1 2 3 4 5 6	Peak Search
so keysight Spectrum Analyzer - Sw RE 50 0 Marker 1 846.80466 0 dB/div Ref 20.00 0 -09	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE 1 2 3 4 5 6 TYPE MWWWW DET P NNNNN	Peak Search
S0 Reysight Spectrum Analyzer - Sw Re 50 m Rarker 1 846.80466 846.80466 0 dB/div Ref 20.00 d -0 g 10 d	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE 1 2 3 4 5 6 TYPE MWWWW DET P NNNNN	Peak Search Next Peal
so keysight Spectrum Analyzer - Sw Resign Song Marker 1 846.80466 0 dB/div Ref 20.00 d 0 0 0 0 0 0	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm	Peak Search Next Peal
S0 # # %	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE 1 2 3 4 5 6 TYPE MWWWW DET P NNNNN	Peak Search Next Peal
S0 Revision Spectrum Analyzer - Sw Revision Revisio Revisio Revisio Revisio Revisio Revisio Revisio Revisio Revisio	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm	Peak Search Next Peal Next Pk Righ
SG SG € existint Spectrum Analyzer - Sw € existint Spectrum Analyzer - Sw Ararker 1 846.804661 10 dB/div Ref 20.00 0 -09	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm	Peak Search Next Peak Next Pk Righ
SC → Keysight Spectrum Analyzer-Sw 4 PF 50 Ω Ararker 1 846.804661 0 dB/div Ref 20.00 d 0 0 0 0 0 0 0 0 0 0 0 0 0 0	2 AC 66667 MHz PNO: Fast IFGain:Lov	SENSE:INT SC	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm	
SC Keysight Spectrum Analyzer - Sw @ # # \$50 mtext //arker 1 846.80466/ 846.80466/ 8 8 10 dB/div Ref 20.00 d 8 8 0 00 0 0 9 9 9 10 <td< td=""><td>dBm</td><td>SENSE:INT SC Trig: Free Run #Atten: 30 dB</td><td>DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5</td><td>TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm</td><td>Peak Search Next Peak Next Pk Righ Next Pk Lef</td></td<>	dBm	SENSE:INT SC Trig: Free Run #Atten: 30 dB	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm	Peak Search Next Peak Next Pk Righ Next Pk Lef
SC → Keysight Spectrum Analyzer-Sw 4 PF 50 Ω Ararker 1 846.804661 0 dB/div Ref 20.00 d 0 0 0 0 0 0 0 0 0 0 0 0 0 0	dBm	SENSE:INT SC Trig: Free Run #Atten: 30 dB	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 3 4 5 6 TYPE DET P NUNNW CT 846.80 MHz -59.810 dBm	Peak Search Next Peak Next Pk Righ
S0 Keysight Spectrum Analyzer - Sw 0 8F 50 m Ararker 1 846.80466 86 86 10 68 97 00 97 97 97 00 97 97 97	dBm	SENSE:INT SC Trig: Free Run #Atten: 30 dB	DURCE OFF ALIGN AUTO Avg Type: Log-Pwr Avg Hold:>5/5	TRACE [] 2 4 5 6 TYPE MWWWW DEF MWWWW CT1 846.80 MHz -59.810 dBm -10.15 dBm -10.15 dBm	Peak Search Next Peak Next Pk Righ Next Pk Lef
S0 Ref 50 m Arrker 1 846.80466 Ref 20.00 m 0 dB/dly Ref 20.00 m 0 0 Ref 20.00 m	dBm	SENSE:INT SC	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE [] 2 4 5 6 TYPE MWWWNE OPT MWWNNN (r1 846.80 MHz -59.810 dBm -10.15.6m -10.15.6m Stop 1.0000 GHz	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta
S0 Ref 50 mm 0 dB/dly Ref 20.00 mm	2 AC 6667 MHz PN0: Fast IFGain:Lov dBm #	/ SENSE:INT SC Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE [] 2 4 5 6 TYPE MUMUMUM (r1 846.80 MHz -59.810 dBm -10.15.80	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta
S0 PF 50 PF Ref 20.00 f PF 50 PF Aarker 1 846.80466 PF 50 PF 10 dB/div Ref 20.00 f PF 10 dV Ref 20.00 f PF	dBm	BENSE:INT SC Trig: Free Run #Atten: 30 dB	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE [] 2 4 5 6 TYPE MWWWNE OPT MWWNNN (r1 846.80 MHz -59.810 dBm -10.15.6m -10.15.6m Stop 1.0000 GHz	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta
SG PF SG Q Image: Sector of Analyzer - Sw Q PF SG Q Image: Analyzer - Sw Q PF PF Image: Analyzer - Sw Q Image: Analyzer - Sw Q PF Image: Analyzer - Sw Q Image: Analyzer - Sw Q PF Image: Analyzer - Sw Q Image: Analyzer - Sw Q PF Image: Analyzer - Sw Q Image: Analyzer - Sw Q <t< td=""><td>2 AC 6667 MHz PNC: Fast IFGain:Lov dBm</td><td>/EW 300 kHz</td><td>Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK</td><td>TRACE [] 2 4 5 6 TYPE MUMUMUM (r1 846.80 MHz -59.810 dBm -10.15.80</td><td>Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta Mkr→Cf</td></t<>	2 AC 6667 MHz PNC: Fast IFGain:Lov dBm	/EW 300 kHz	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE [] 2 4 5 6 TYPE MUMUMUM (r1 846.80 MHz -59.810 dBm -10.15.80	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta Mkr→Cf
S0 Keysight Spectrum Analyzer - Sw RE 50 g Aarker 1 846.80466 10 dB/div Ref 20.00 d 9 9 10 dB/div 8 10 dB/div 10 d 11 dB/div 10 d 12 dB/div 10 d 13 dB/div 10 d	2 AC 6667 MHz PNC: Fast IFGain:Lov dBm	/EW 300 kHz	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE D 2 4 5 6 TYPE MUMUMUM DET MUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMU	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta Mkr→Cf
S0 RE 50 mm Arker 1 846.80466 Ref 20.00 mm 10 dB/div Ref 20.00 mm 00 Ref 20.00 mm 10 Ref 20.00 mm 11 Ref 20.00 mm 12 1 13 1	2 AC 6667 MHz PNC: Fast IFGain:Lov dBm	/EW 300 kHz	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE [] 2 4 5 6 TYPE MUMUMUM (r1 846.80 MHz -59.810 dBm -10.15.80	Peak Search Next Peak Next Pk Righ Next Pk Lef
SG RF SG Q Image: Second Sec	2 AC 6667 MHz PNC: Fast IFGain:Lov dBm	/EW 300 kHz	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE D 2 4 5 6 TYPE MUMUMUM DET MUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMU	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta Mkr→Cf
S0 85 96 96 90 Arker 1 846.80466 96 90 9	2 AC 6667 MHz PNC: Fast IFGain:Lov dBm	/EW 300 kHz	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE D 2 4 5 6 TYPE MUMUMUM DET MUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMU	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta MkrCf MkrRef Lv
SG RF SO Q Image: Second Sec	2 AC 6667 MHz PNC: Fast IFGain:Lov dBm	/EW 300 kHz	Avg Type: Log-Pwr Avg Type: Log-Pwr Avg Hold:>6/5 MK	TRACE D 2 4 5 6 TYPE MUMUMUM DET MUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMUMU	Peak Search Next Peak Next Pk Righ Next Pk Lef Marker Delta Mkr→CF



Image: Sense INT Source OFF ALIGN AUTO 03:58:18 PM oct 22, 2018 Display Line -10.09 dBm Frig: Free Run IFGain:Low Avg Type: Log-Pwr Avg Hold:>6/5 Trace T 23 4 5 0 Trace T 23 4 5 0 Avg Hold:>6/5 Display Line -10.09 dBm Mkr2 24.017 6 GHz 10 dB/div Ref 20.00 dBm Autom 10 dBm Autom 10 dBm	
Display Line -10.09 dBm PNO: Fast Trig: Free Run IFGain:Low #Atten: 30 dB Mkr2 24.017 6 GHz -40.011 dBm Avg Hold:>6/6 Mkr2 24.017 6 GHz -40.011 dBm	
IFGain:Low #Atten: 30 dB Der PAINNIN Mkr2 24.017 6 GHz 40.011 dBm 40.011 dBm	blay
10 dB/div Ref 20.00 dBm -40.011 dBm	otation►
	otation
	Title►
10.00	
	Fraticule
	Off
	loud inc
	lay Line 0.09 dBm
-70.0 On	Off
Start 1.00 GHz Stop 25.00 GHz	
#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 60.00 ms (30001 pts)	
MKR MODE TRC SCL X Y FUNCTION WIDTH FUNCTION VALUE	
1 N 1 f 2.463.2 GHz 9.913 dBm 2 N 1 f 24.017 6 GHz -40.011 dBm -40.011 dBm	System
	Dísplay▶
	ettings
MSG STATUS	
Keysight Spectrum Analyzer - Swept SA	
Δ# RF 50 Ω AC SENSE:INT SOURCE OFF ALIGN AUTO 03:58:43 PM Oct 22, 2018 Deale SENSE:INT SOURCE OFF	<u> </u>
PNO: Fast Trig: Free Run Avg Hold:>5/5 TYPE	
ir Gain.Low #Atten: of dB	extPeak
10.0 Next F	Pk Right
-10.09 dBin	
-20.0	
	t Pk Left
-40.0	_
	cer Delta
-70.0 Start 0.0300 GHz Stop 1.0000 GHz	
-70.0 Start 0.0300 GHz Stop 1.0000 GHz	∕lkr→CF
Start 0.0300 GHz Stop 1.0000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts)	∕lkr→CF
Start 0.0300 GHz Stop 1.0000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts) MRR MODE TRC SCL X Y Function width Function value 1 N 1 f 796.30 MHz -59.985 dBm	
Start 0.0300 GHz Stop 1.0000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts) Mrk Mobel TRC ScL X Y Function width Function value 1 N 1 f 796.30 MHz -59.985 dBm Mkr- 2 3 - - - - Mkr-	Mkr→CF →RefLvl
Total Start 0.0300 GHz Stop 1.0000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts) MRR MODE TRC SCL X Y FUNCTION WIDTH FUNCTION VALUE 1 N 1 f 796.30 MHz -59.985 dBm MKr 3	
Total Start 0.0300 GHz Stop 1.0000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts) MKR MODE TRC SCL X Y 1 1 f 796.30 MHz -59.985 dBm 3 4 5 6 6 6 7 8 1 1 6 6 6	→RefLvl
Total Y Function Funct	
Total Total Total Start 0.0300 GHz Stop 1.0000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 94.00 ms (30001 pts) M MRR MODELTRC: SCL X Y FUNCTION FUNCTION VALUE M 1 N 1 f 796.30 MHz -59.985 dBm M M 2 3 4 59.985 dBm 59.985 dBm M M 3 4 59.985 dBm 59.985 dBm 50.000 ms (3000 ms (3000 ms (3000 ms (3000 ms (3000 ms (3000 ms (300	→Ref L vi More


Note: Sweep points=30001pts



8. Radiated Spurious Emissions and Restricted Bands


8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

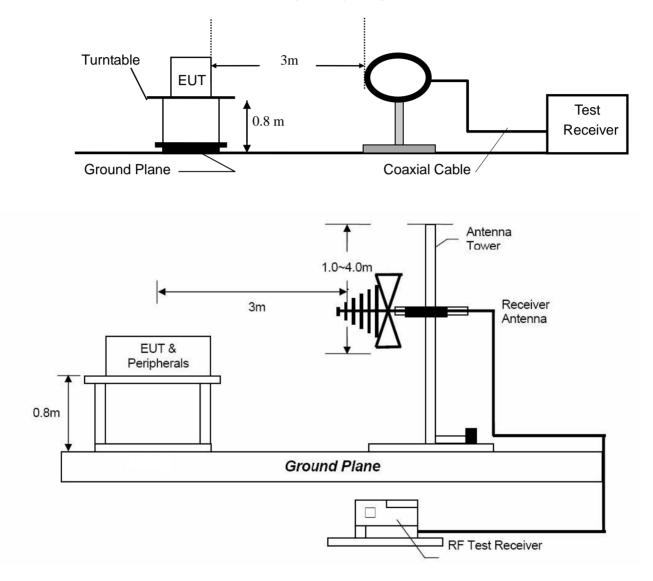



8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

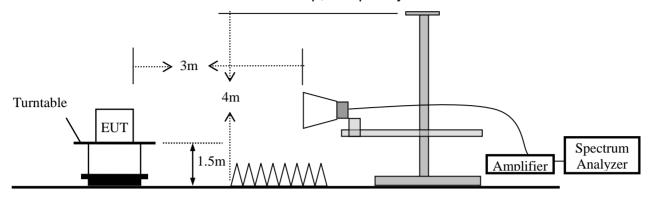

8.2 Measurement Procedure

- a. Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:

The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.



During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit

Frequency range	Distance Meters	Field Strengths Limit (15.209)
MHz		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark: (1) Emission level (dB) μ V = 20 log Emission level μ V/m

- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
- (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.


8.4 Measurement Results

Please refer to following plots of the worst case 802.11g Middle channel.





Dongguan NTC Co., Ltd. Tel:+86-769-22022444 Fax:+86-769-22022799 Web: Http://www.ntc-c.com

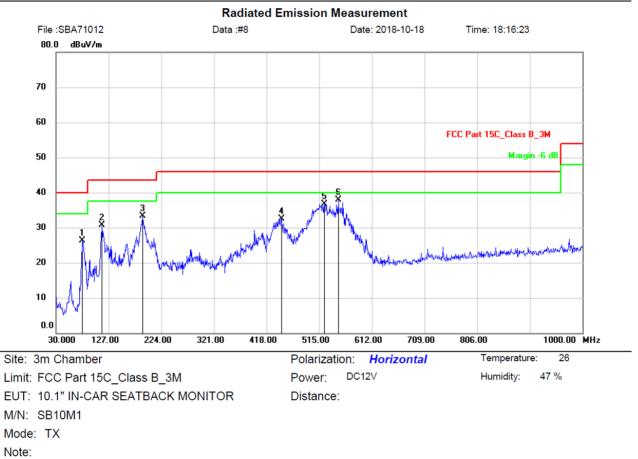

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	78.5000	43.97	-17.59	26.38	40.00	-13.62	peak			
2	114.3900	43.52	-12.87	30.65	43.50	-12.85	peak			
3	189.0800	47.01	-13.63	33.38	43.50	-10.12	peak			
4	445.1600	40.55	-8.08	32.47	46.00	-13.53	peak			
5	524.7000	43.41	-6.71	36.70	46.00	-9.30	peak			
6 *	549.9200	44.38	-6.56	37.82	46.00	-8.18	peak			

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.





Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	114.3900	39.58	-15.99	23.59	43.50	-19.91	peak			
2	137.6700	41.28	-18.48	22.80	43.50	-20.70	peak			
3	188.1100	45.59	-16.68	28.91	43.50	-14.59	peak			
4	396.6600	36.74	-11.13	25.61	46.00	-20.39	peak			
5	453.8900	37.81	-10.17	27.64	46.00	-18.36	peak			
6 *	531.4900	42.62	-8.68	33.94	46.00	-12.06	peak			

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Test Mode:	The worst case: 802.11g	Test Date :	October 23, 2018
Frequency Range:	Above 1GHz	Temperature :	24 °C
Test Result:	PASS	Humidity :	50 %
Measured Distance:	3m	Test By:	Sance

Freq. Ant.Pol. (MHz) (H/V)		Rea Level(ding dBuV)	Factor (dB/m)	Emissio (dBu			t 3m V/m)		rgin B)
	(11/7)	PK	PK AV ^{(ui}	(ub/iii)	PK	AV	PK	AV	PK	AV
			Oper	ation Mo	ode: TX M	lode (Lo	w)			
4824	V	47.38	32.89	6.38	53.76	39.27	74.00	54.00	-20.24	-14.73
7236	V	46.36	32.39	10.48	56.84	42.87	74.00	54.00	-17.16	-11.13
4824	Н	47.44	33.2	6.38	53.82	39.58	74.00	54.00	-20.18	-14.42
7236	Н	46.85	32.07	10.48	57.33	42.55	74.00	54.00	-16.67	-11.45
			Ope	ration Mo	ode: TX N	lode (Mi	d)			
4874	V	47.32	33.56	6.56	53.88	40.12	74.00	54.00	-20.12	-13.88
7311	V	46.89	33.03	10.53	57.42	43.56	74.00	54.00	-16.58	-10.44
4874	Н	46.93	32.96	6.56	53.49	39.52	74.00	54.00	-20.51	-14.48
7311	Н	45.99	33.3	10.53	56.52	43.83	74.00	54.00	-17.48	-10.17
			Oper	ation Mo	de: TX M	ode (Hig	jh)			
4924	V	46.85	32.11	6.76	53.61	38.87	74.00	54.00	-20.39	-15.13
7386	V	46.35	31.96	10.57	56.92	42.53	74.00	54.00	-17.08	-11.47
4924	Н	47.36	33	6.76	54.12	39.76	74.00	54.00	-19.88	-14.24
7386	Н	47.12	31.95	10.57	57.69	42.52	74.00	54.00	-16.31	-11.48

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level + Factor

(3) Factor= Antenna Gain + Cable Loss – Amplifier Gain

- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
- (5) Measurement uncertainty : ±3.7dB.
- (6) Horn antenna used for the emission over 1000MHz.



Spurious Emission in restricted band:

Operation Mode:	ТХ	Test Date :	October 23, 2018
Frequency Range:	Above 1GHz	Temperature :	24 °C
Test Result:	PASS	Humidity :	50 %
Measured Distance:	3m	Test By:	Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)			
		PK	AV	(ub/III)	PK	AV	PK	AV	PK	AV		
The worst case:												
Test Mode: 802.11g												
2399.000	Н	50.98	37.15	0.09	51.07	37.24	74.00	54.00	-22.93	-16.76		
2399.000	V	50.58	37.14	0.09	50.67	37.23	74.00	54.00	-23.33	-16.77		
2483.500	Н	50.88	37.02	0.34	51.22	37.36	74.00	54.00	-22.78	-16.64		
2483.500	V	51.3	37.78	0.34	51.64	38.12	74.00	54.00	-22.36	-15.88		

Note: (1) All Readings are Peak Value and AV.

(2) Emission Level= Reading Level+Probe Factor +Cable Loss

(3) Measurement uncertainty : ±3.7dB



9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is PCB antenna and no consideration of replacement, and the best case gain of the antenna is 0dBi. So, the antenna is consider meet the requirement.



10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 15, 2018	Mar. 14, 2019
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2018	Apr. 25, 2019
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2018	Mar. 13, 2019
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2018	Mar. 13, 2019
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2018	Mar. 14, 2019
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2018	Apr. 24, 2019
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Apr. 25, 2018	Apr. 24, 2019
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2018	Apr. 24, 2019
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	Apr. 06, 2018	April. 05, 2019
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 03, 2017	Nov. 02, 2018
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2018	Apr. 24, 2019
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2018	Mar. 13, 2019
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 03, 2017	Nov. 02, 2018
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 03, 2017	Nov. 02, 2018

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.