

## TEST REPORT

Report Number.....:	90120-22-72-22-PP001	
Date of issue .....	Mar.02.2022	
Tested by (+signature) .....	Duke	<i>Duke Chen</i>
Approved by (+signature).....:	Jason	<i>Jason gao</i>
Testing Laboratory name.....:	SLG-CPC Testlaboratory Co., Ltd.	
Address .....	No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117	
Applicant's name .....	DongGuanShi WeizhiChuang Technology Co., Ltd	
Address .....	2/F, NO.3, Zhangyang Fuda 1st Road Zhangmutou Town,DongGuanShi	
Manufacturer's name .....	DongGuanShi WeizhiChuang Technology Co., Ltd	
Address .....	2/F, NO.3, Zhangyang Fuda 1st Road Zhangmutou Town,DongGuanShi	
Factory's name .....	DongGuanShi WeizhiChuang Technology Co., Ltd	
Address .....	2/F, NO.3, Zhangyang Fuda 1st Road Zhangmutou Town,DongGuanShi	
Standard(s).....:	FCC Rules and Regulations Part 15 Subpart C, Section 209	
Test item description.....:	Three-in-one Wireless Charger	
Trade Mark.....:	/	
Model/Type reference .....	W308	
FCC ID.....:	2A4WMWZC-W308	
Date of receipt of test item .....	Feb.16.2022	
Date (s) of performance of test:	Feb.16.2022 to Feb.26.2022	
Summary of Test Results.....:	<b>Pass</b>	
The Summary of Test Results based on a technical opinion belongs to the standard(s).		
<b>General disclaimer:</b>		
This report shall not be reproduced except in full, without the written approval of SLG-CPC Testlaboratory Co., Ltd. The test results in the report only apply to the tested sample.		

## TABLE OF CONTENT

<b>TABLE OF CONTENT</b> .....	<b>2</b>
<b>1. SUMMARY OF TEST RESULTS</b> .....	<b>3</b>
<b>2. GENERAL INFORMATION</b> .....	<b>4</b>
2.1.DESCRPTION OF DEVICE (EUT).....	4
2.2.INPUT / OUTPUT PORTS .....	4
2.3.INDEPENDENT OPERATION MODES .....	5
2.4.DESCRPTION OF TEST FACILITY .....	5
2.5.DESCRPTION OF SUPPORT DEVICE .....	6
2.6.MEASUREMENT UNCERTAINTY .....	6
<b>3. MEASURING DEVICE AND TEST EQUIPMENT</b> .....	<b>7</b>
3.1.MEASUREMENT EQUIPMENT USED .....	7
<b>4. 20DB BANDWIDTH</b> .....	<b>8</b>
4.1.TEST PROCEDURE .....	8
4.2.TEST RESULTS.....	8
<b>5. POWER LINE CONDUCTED EMISSION MEASUREMENT</b> .....	<b>9</b>
5.1.BLOCK DIAGRAM OF TEST SETUP .....	9
5.2.LIMITS.....	9
5.3.TEST PROCEDURE .....	9
5.4.MEASURING RESULTS .....	10
<b>6. RADIATED EMISSION TEST</b> .....	<b>13</b>
6.1.MEASUREMENT PROCEDURE .....	13
6.2.TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	13
6.3.RADIATED EMISSION LIMIT .....	14
6.4.MEASUREMENT RESULT .....	15

## 1. SUMMARY OF TEST RESULTS

<b>EMISSION</b>		
Description of Test Item	Standard & Limits	Results
Conducted Emission	FCC Part 15, Subpart C- Section 15.207 ANSI C63.10-2013	Pass
Radiated Emission	FCC Part 15, Subpart C- Section 15.209 ANSI C63.10-2013	Pass
20dB Bandwidth	FCC Part 15, Subpart C- Section 15.215 ANSI C63.10-2013	Pass
Note: N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Product Name	Three-in-one Wireless Charger
Trade Name	/
Model Name	W308
Series Model	N/A
Output	Wireless Output1::15W/10W/7.5W Wireless Output2: 5W Wireless Output3: 2.5W(For iWatch)
Operation frequency	115-205KHz
Modulation Type	MSK
Antenna Type	Inductive Loop Antenna with 0dBi
Power Supply	Input: DC 5V or 9V or 12V form Adapter
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

### 2.2. Input / Output Ports

Port #	Name	Type*	Cable Max. >3m	Cable Shielded	Comments
1	Enclosure	N/E	--	--	None
2	DC power	AC	No	Unshielded	1 ports
3	USB Out	DC	--	--	1 ports
* Note: For the purposes of the present document, the following symbols apply: AC AC Power Port DC DC Power Port N/E Non-Electrical I/O Signal Input or Output Port (Not Involved in Process Control) TP Telecommunication Ports					

### 2.3. Independent Operation Modes

Mode	TEST MODE DESCRIPTION
1.	AC/DC Adapter + EUT + Mobile Phone(15W) + Earphone (5W) + Watch (2.5W)
2.	AC/DC Adapter + EUT + Mobile Phone(15W) + Watch (2.5W)
3.	AC/DC Adapter + EUT + Mobile Phone(15W) + Earphone (5W)
4.	AC/DC Adapter + EUT + Watch (2.5W)
5.	AC/DC Adapter + EUT + Earphone (5W)
6.	AC/DC Adapter + EUT + Mobile Phone(7.5W)
7.	AC/DC Adapter + EUT + Mobile Phone(10W)
8.	AC/DC Adapter + EUT + Mobile Phone(15W)
Note: 1. All test modes were pre - tested, but we only recorded the worst case in this report.	

### 2.4. Description of Test Facility

#### Site Description

EMC Lab. :

Accredited by ISED, October 04 2021  
 CAB identifier: CN0126  
 Company Number: 27767  
 Accredited by A2LA, October 04 2021  
 The Certificate Registration Number is 6325.01

Name of Firm : SLG-CPC Testlaboratory Co., Ltd.  
 Site Location : No. 11, Wu Song Road, Dongcheng District, Dongguan,  
 Guangdong Province, China 523117

## 2.5. Description of Support Device

No.	Equipment	Trade name	Model	S/N	Power Cord
1.	Mobile phone	HUAWEI	Mare 30		
2.	Adapter	HUAWEI	HW-200675CD1		
3.	Watch	XIAOMI	DL03		
4.	Earphone	Airpors Pro	A2190		

## 2.6. Measurement Uncertainty

Test Item	Uncertainty
Occupied Channel Bandwidth	: $\pm 2.3\%$
Conducted Emission Uncertainty	: 3.08dB
Radiated Emission Uncertainty (3m Chamber)	: 3.60dB (30M~1GHz) 4.48dB (1~6GHz)

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. MEASUREMENT EQUIPMENT USED

Equipment	Model	Manufacturer	S/N	Cal. Due
<b>RF Connected Test</b>				
Vector Signal Generator	Rohde & Schwarz	SMBV100B(6G)	101166	2022/07/30
Analog Signal Generator	Rohde & Schwarz	SMB100A(40G)	181333	2022/07/30
Signal Analyzer	Rohde & Schwarz	FSV40	101527	2022/05/24
Power Analyzer	Rohde & Schwarz	OSP-B157W8	N/A	2022/09/23
Wideband Radio Communication Tester	R&S	CMW270	101985	2022/07/30
Temperature&Humidity test chamber	ESPEC	VC 4018	/	2022/04/02
Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	166898	2022/09/07
<b>Radiated Emission Test</b>				
EMI Test Receiver	KEYSIGHT	N9010A	MY56070465	2022/12/10
EMI Test Receiver	Rohde & Schwarz	FSV40	101511	2022/05/24
Bilog Antenna	Schwarzbeck	VULB 9163	01335	2023/04/28
Power Amplifier	EMEC	EM330	060676	2022/12/10
Cable	Tuyue	F4309	L-400-NmNm-12000	2022/12/10
Signal Analyzer	Rohde & Schwarz	FSV40	101511	2022/05/24
Horn Antenna	Schwarzbeck	BBHA9170	/	2022/10/09
Power Amplifier	Rohde & Schwarz	SCU-18F	180118	2022/05/17
Active Loop Antenna	ETS LINDGREN	6512	41623	2022/04/26
Test Software	Farad	EZ-EMC	Ver.CPC-3A1	/
<b>Conducted Emission Test</b>				
LISN	Schwarzbeck	NSLK 8127	8127-892	2022/03/19
EMI Test Receiver	R&S	ESR3	102124	2022/12/10
Pulse Limiter	R&S	ESH3-Z2	357.8810.52	2022/12/10
Test Software	Farad	EZ-EMC	Ver.CPC-3A1	/

## 4. 20DB BANDWIDTH

### 4.1. Test Procedure


Set to the maximum power setting and enable the EUT transmit continuously  
 Set RBW = 10KHz.  
 Set the video bandwidth (VBW) =30KHz.  
 Set Span= 100KHz  
 Set Detector = Peak.  
 Set Trace mode = max hold.  
 Set Sweep = auto couple.  
 Measure and record the results in the test report.

### 4.2. Test Results

Temperature: 24°C  
 Humidity: 53 %

Test Date: Feb. 25, 2022  
 Test By: Ken


20dB Band=28.08kHz

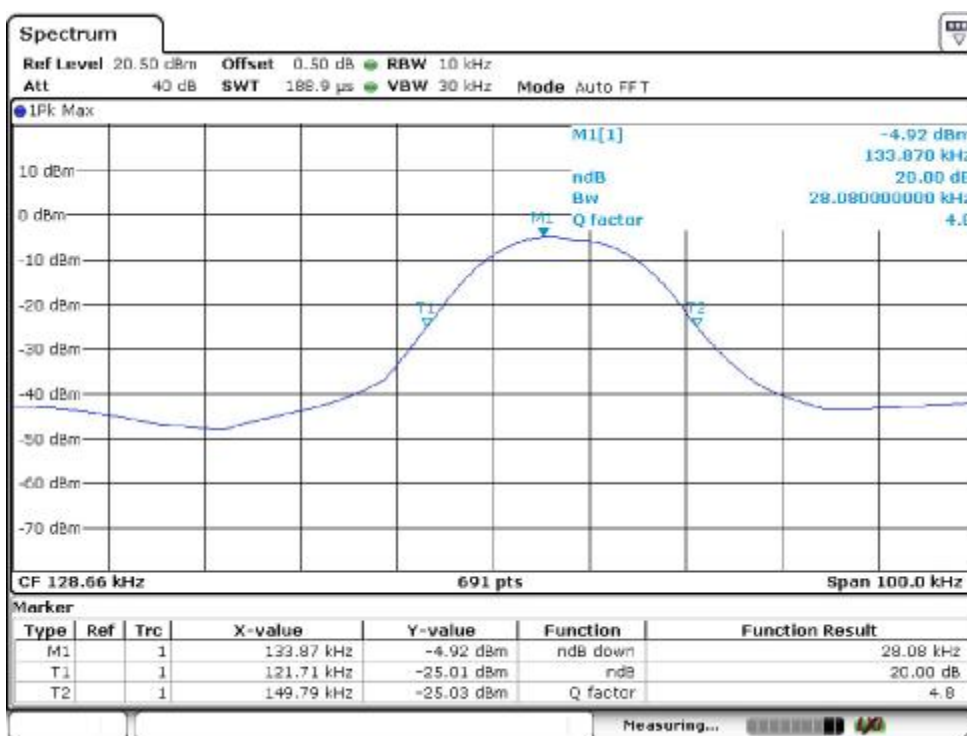



## 5. POWER LINE CONDUCTED EMISSION MEASUREMENT

### 5.1. Block Diagram of Test Setup

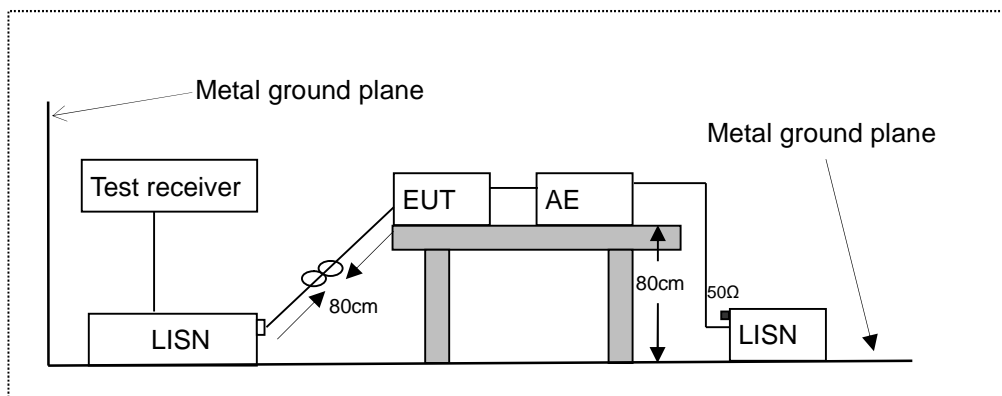

LISN: Line Impedance Stabilization Network  
 AE: Associated equipment  
 EUT: Equipment under test

### 5.2. Limits

FCC Part 15.207

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 5.3. Test Procedure

The EUT was placed on a desk 0.8 m height from the metal ground plane and 0.4 m from the conducting wall of the shielding room and it was kept at least 0.8 m from any other grounded conducting surface. The size of the table will nominally be 1.5 m x1.0 m.

The rear of the arrangement shall be flush with the back of the supporting tabletop unless that would not be possible or typical of normal use.

All units of equipment forming the system under test (includes the EUT as well as connected peripherals and associated equipment or devices) shall be arranged such that a nominal 0.1 m separation is achieved between the neighboring units.

Connect EUT to the power mains through a line impedance stabilization network (LISN). Where the mains cable supplied by the manufacturer is longer than 1 m, the excess should be folded at the centre into a bundle no longer than 0.4 m, so that its length is shortened to 1 m.

All the support units are connecting to the other LISN.

The LISN provides 50 ohm coupling impedance for the measuring instrument.

Both sides of AC line were checked for maximum conducted interference.

The frequency range from 150 kHz to 30 MHz was sweep.

Set the test-receiver system to quasi peak detect function and average detect function, and to measure the conducted emissions values.


Test results were obtained from the following equation:

Emission Level (dB $\mu$ V) = LISN Factor (dB) + Cable Loss (dB) + Reading (dB $\mu$ V)

Margin (dB) = Emission Level (dB $\mu$ V) - Limit (dB $\mu$ V)


#### 5.4. Measuring Results

**PASS.**

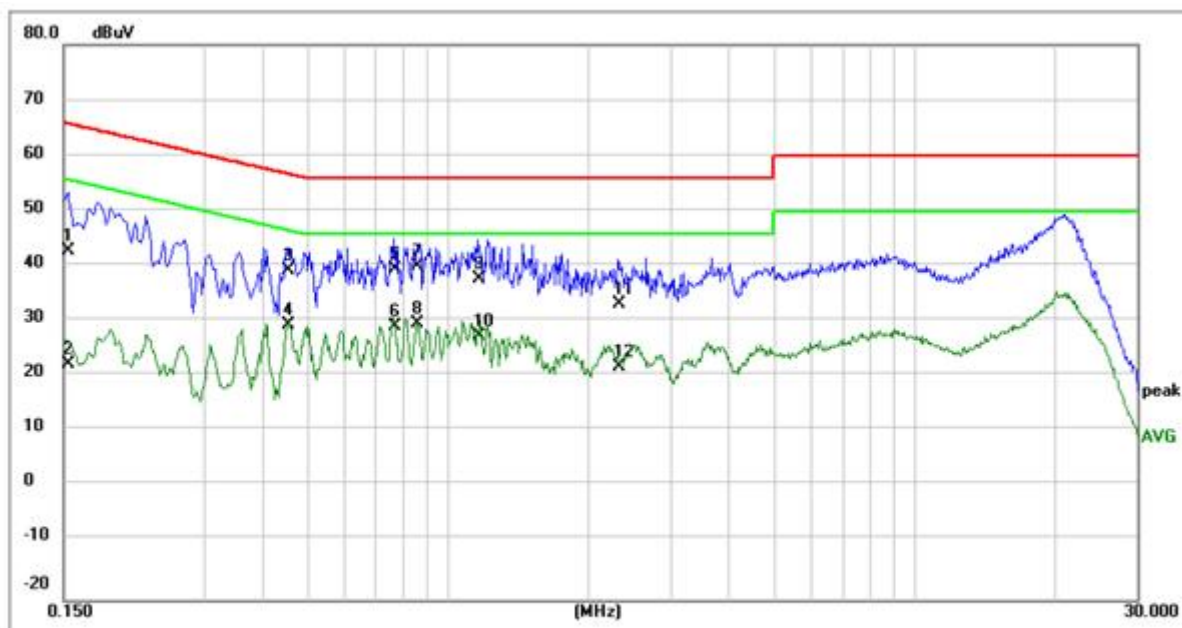

Site:	Phase:L1	Temperature(C):24(C)
Limit: FCC Part 15C Conduction(QP)		Humidity(%):53%
M/N.: W308	Power Rating: AC120V/60Hz	
Mode: Wireless Charge	Test Engineer: Ken	
Note:		

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1539	32.81	10.14	42.95	65.79	-22.84	QP	
2	0.1539	12.36	10.14	22.50	55.79	-33.29	AVG	
3	0.4540	27.57	11.89	39.46	56.80	-17.34	QP	
4	0.4540	17.74	11.89	29.63	46.80	-17.17	AVG	
5	0.7700	27.68	11.88	39.56	56.00	-16.44	QP	
6	0.7700	17.55	11.88	29.43	46.00	-16.57	AVG	
7 *	0.8580	28.22	11.88	40.10	56.00	-15.90	QP	
8	0.8580	18.09	11.88	29.97	46.00	-16.03	AVG	
9	1.1620	26.20	11.72	37.92	56.00	-18.08	QP	
10	1.1620	15.96	11.72	27.68	46.00	-18.32	AVG	
11	2.3179	22.92	10.57	33.49	56.00	-22.51	QP	
12	2.3179	11.55	10.57	22.12	46.00	-23.88	AVG	

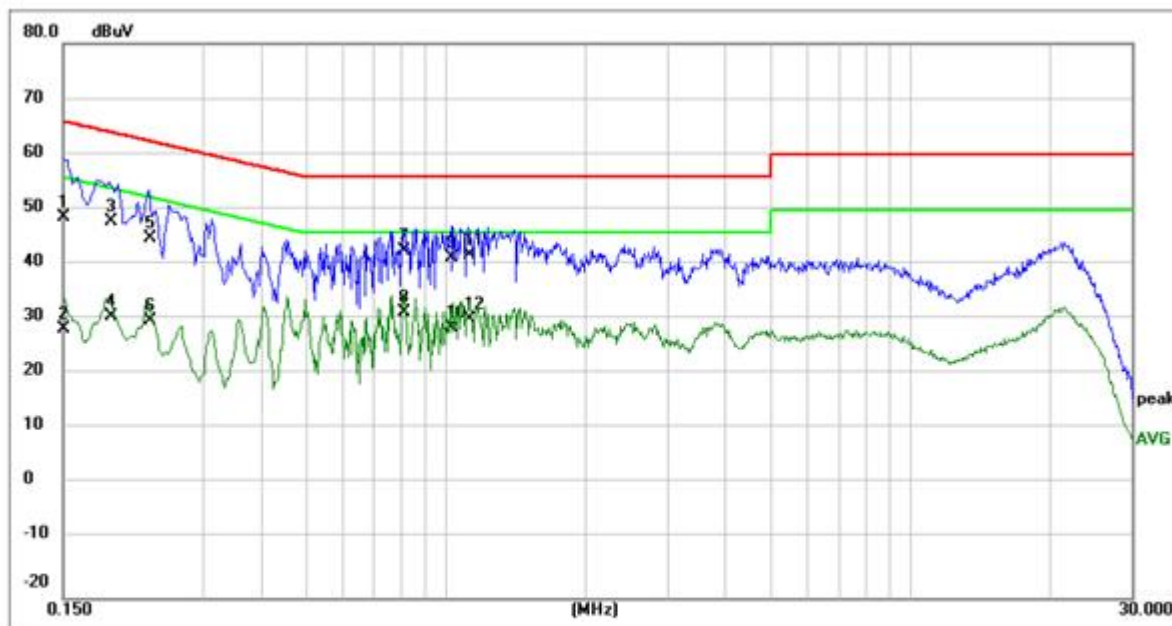

Site:	Phase:N	Temperature(C):24(C)
Limit: FCC Part 15C Conduction(QP)		Humidity(%):53%
M/N.: W308	Power Rating: AC120V/60Hz	
Mode: Wireless Charge	Test Engineer: Ken	
Note:		

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector	Comment
1	0.1500	38.65	9.98	48.63	66.00	-17.37	QP	
2	0.1500	18.69	9.98	28.67	56.00	-27.33	AVG	
3	0.1900	36.45	11.55	48.00	64.04	-16.04	QP	
4	0.1900	19.30	11.55	30.85	54.04	-23.19	AVG	
5	0.2300	33.13	11.93	45.06	62.45	-17.39	QP	
6	0.2300	18.08	11.93	30.01	52.45	-22.44	AVG	
7 *	0.8100	30.91	11.88	42.79	56.00	-13.21	QP	
8	0.8100	19.82	11.88	31.70	46.00	-14.30	AVG	
9	1.0300	29.60	11.85	41.45	56.00	-14.55	QP	
10	1.0300	17.06	11.85	28.91	46.00	-17.09	AVG	
11	1.1180	30.28	11.76	42.04	56.00	-13.96	QP	
12	1.1180	18.72	11.76	30.48	46.00	-15.52	AVG	


## 6. RADIATED EMISSION TEST

### 6.1. Measurement Procedure


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.
5. Use the following receiver/spectrum analyzer settings:  
 Span = wide enough to fully capture the emission being measured  
 RBW=200Hz for 9KHz to 150KHz,  
 RBW=9kHz for 150KHz to 30MHz,  
 RBW=120KHz for 30MHz to 1GHz  
 VBW  $\geq 3 \times$  RBW  
 Sweep = auto  
 Detector function = QP  
 Trace = max hold

### 6.2. Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

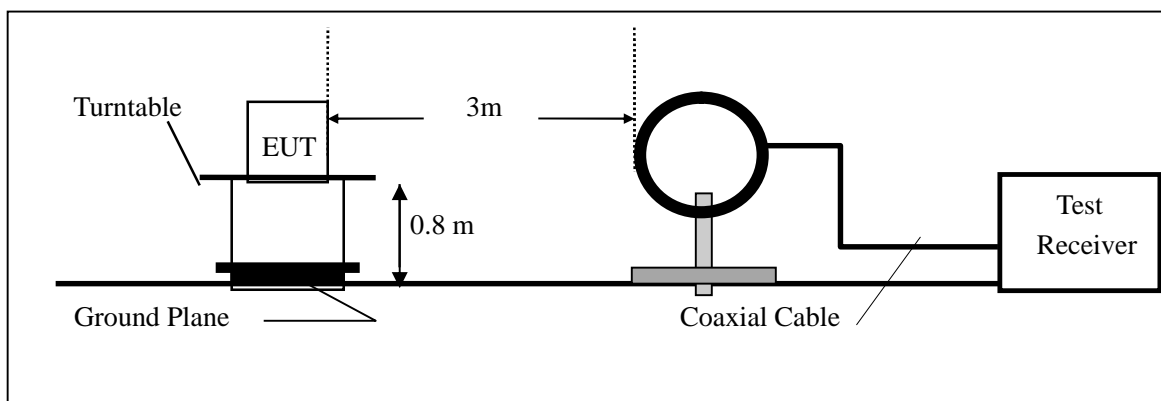

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

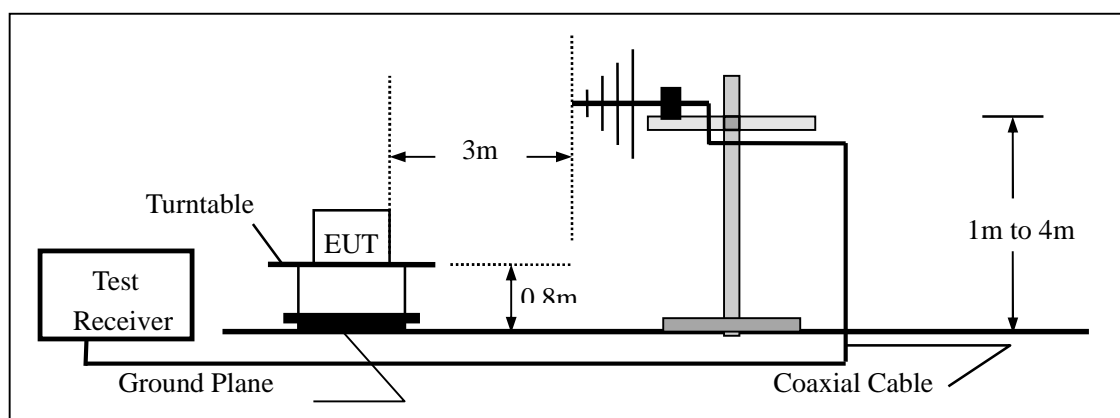

### 6.3. Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500


#### 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

### 6.4.Measurement Result

9kHz-150kHz:

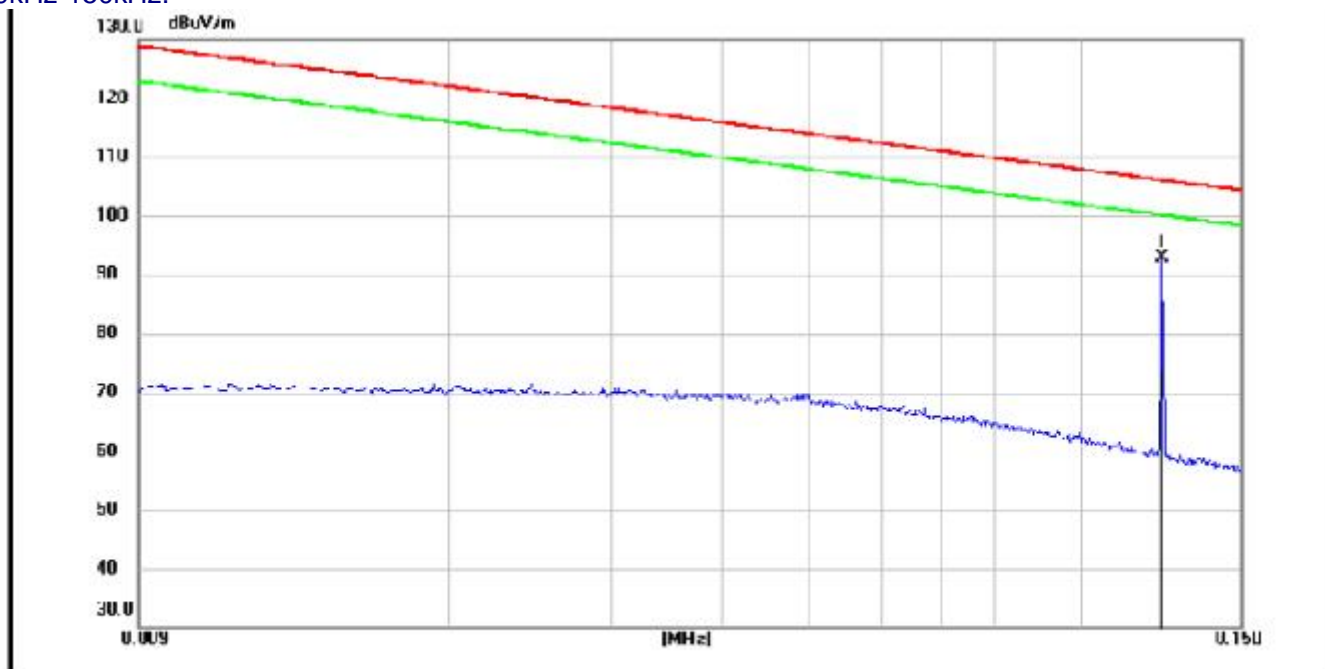

Site aaa  
Limit: FCC Part15.209 9k-30M

Polarization: *Vertical*  
Power: AC 120 V/60 Hz


Temperature: 23.4(C)  
Humidity: 47 %RH

Mode: Wireless Charging  
Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector				
1	0.122800	78.98	13.87	92.85	106.05	13.20	peak				

\*:Maximum data x:Over limit !:over margin

150kHz-30MHz:

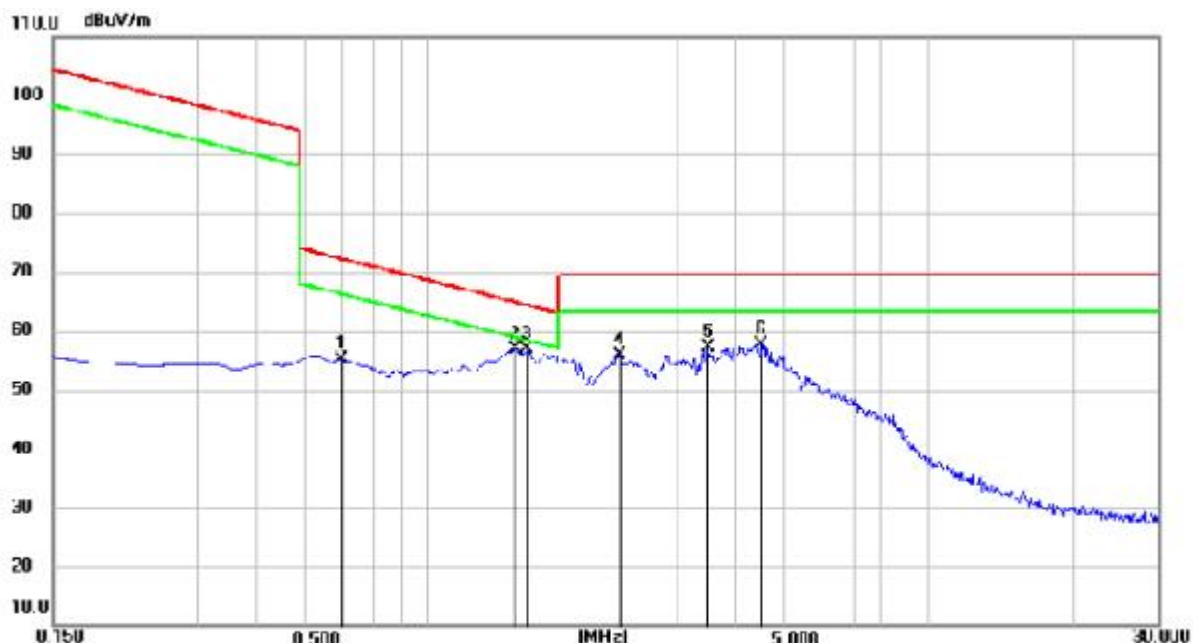

Site aaa

Polarization: **Vertical**

Temperature: 23.4(C)

Limit: FCC Part15.209 9k-30M

Power: AC 120 V/60 Hz

Humidity: 47 %RH

Mode: Wireless Charging

Notc:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector				
1	0.597700	54.22	0.99	55.21	72.25	-17.04	peak				
2	1.373600	62.89	-5.90	56.99	64.91	-7.92	peak				
3	1.463300	63.19	-6.33	56.86	64.35	-7.49	peak				
4	2.269200	65.46	-9.65	55.81	69.50	-13.69	peak				
5	3.463200	70.20	-12.97	57.23	69.50	-12.27	peak				
6	4.478200	72.75	-15.08	57.69	69.50	-11.81	peak				

\*:Maximum data    x:Over limit    !:over margin




30MHz-1GHz:



Site:		Antenna::Vertical	Temperature(C):24.5(C)
Limit:	FCC Part 15C Radiation(OP)		Humidity(%):55%
M/N.:	W308	Power Rating:	AC120V/60Hz
Mode:	Wireless Charge	Test Engineer:	Ken
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	30.7455	26.35	-0.43	25.92	40.00	-14.08	peak			
2 *	39.9942	33.88	-5.03	28.85	40.00	-11.15	peak			
3	46.1779	35.56	-7.65	27.91	40.00	-12.09	peak			
4	103.8055	31.07	-4.55	26.52	43.50	-16.98	peak			
5	114.5146	30.46	-3.72	26.74	43.50	-16.76	peak			
6	362.9844	33.70	-2.74	30.96	46.00	-15.04	peak			

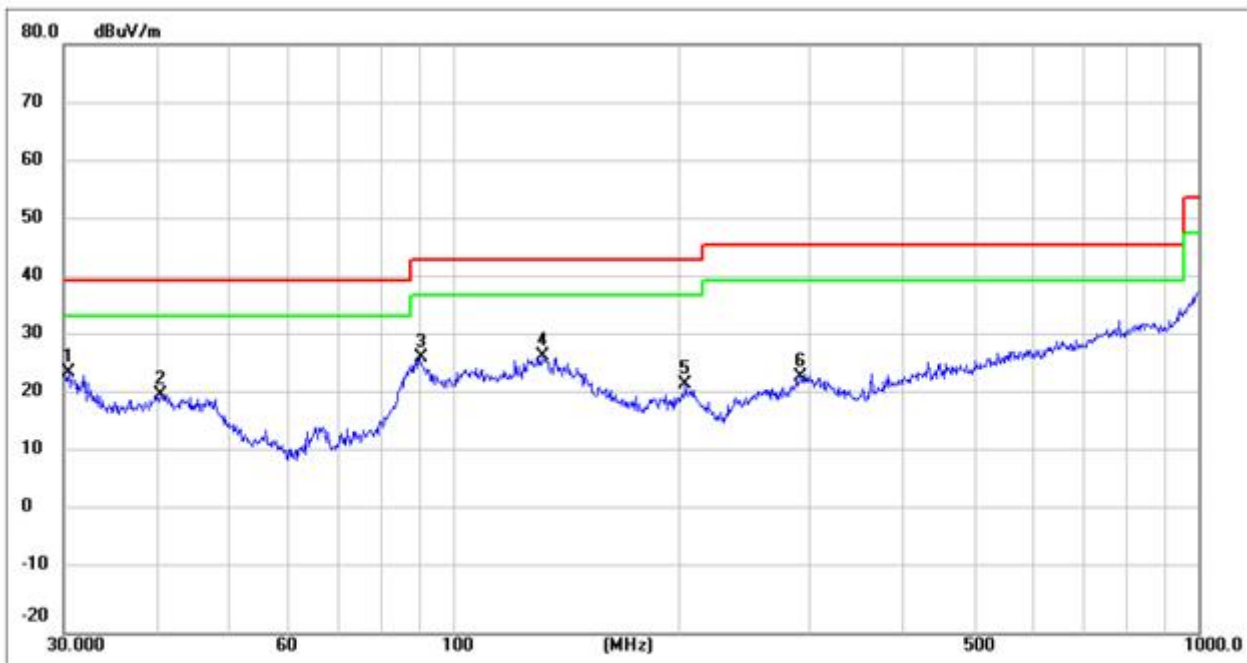

Site:		Antenna::Horizontal	Temperature(C):24.5(C)
Limit:	FCC Part 15C Radiation(QP))		Humidity(%):55%
M/N.:	W308	Power Rating:	AC120V/60Hz
Mode:	Wireless Charge	Test Engineer:	Ken
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1 *	30.4238	24.48	-0.08	24.40	40.00	-15.60	peak			
2	40.4172	25.73	-5.20	20.53	40.00	-19.47	peak			
3	90.2205	35.63	-8.79	26.84	43.50	-16.66	peak			
4	131.7577	30.30	-3.15	27.15	43.50	-16.35	peak			
5	204.9551	29.42	-6.97	22.45	43.50	-21.05	peak			
6	292.0583	24.59	-1.06	23.53	46.00	-22.47	peak			

-----The end-----