





Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 40 / Ant. 2

**Horizontal**

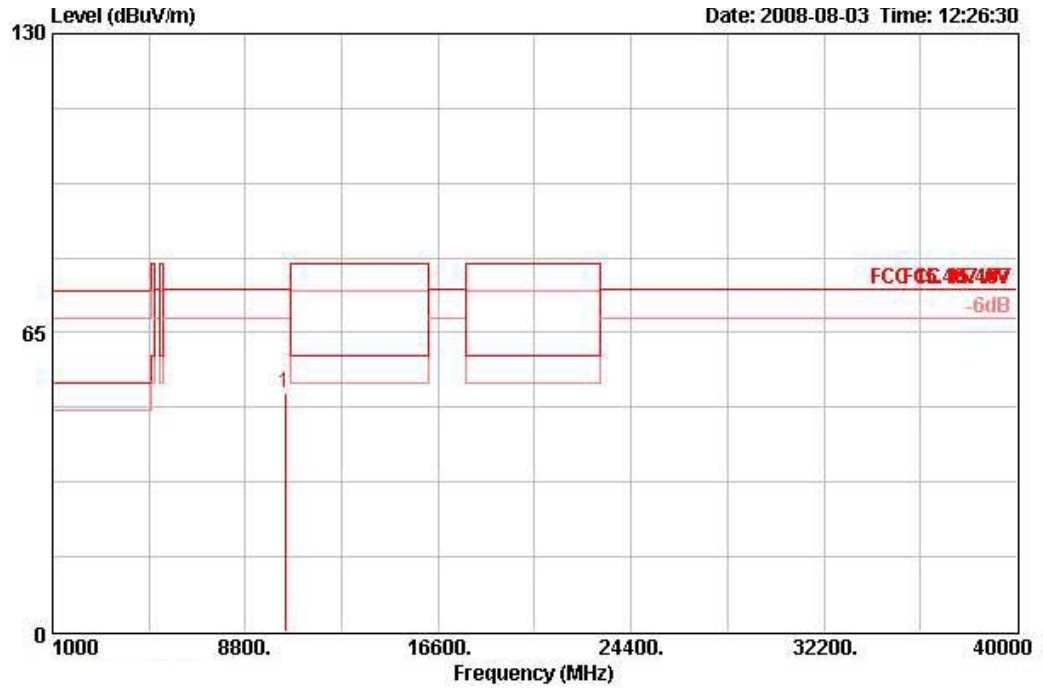

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10400.900	51.76	-22.54	74.30	42.04	38.38	6.39	35.05	PEAK	110	212	HORIZONTAL

**Vertical**

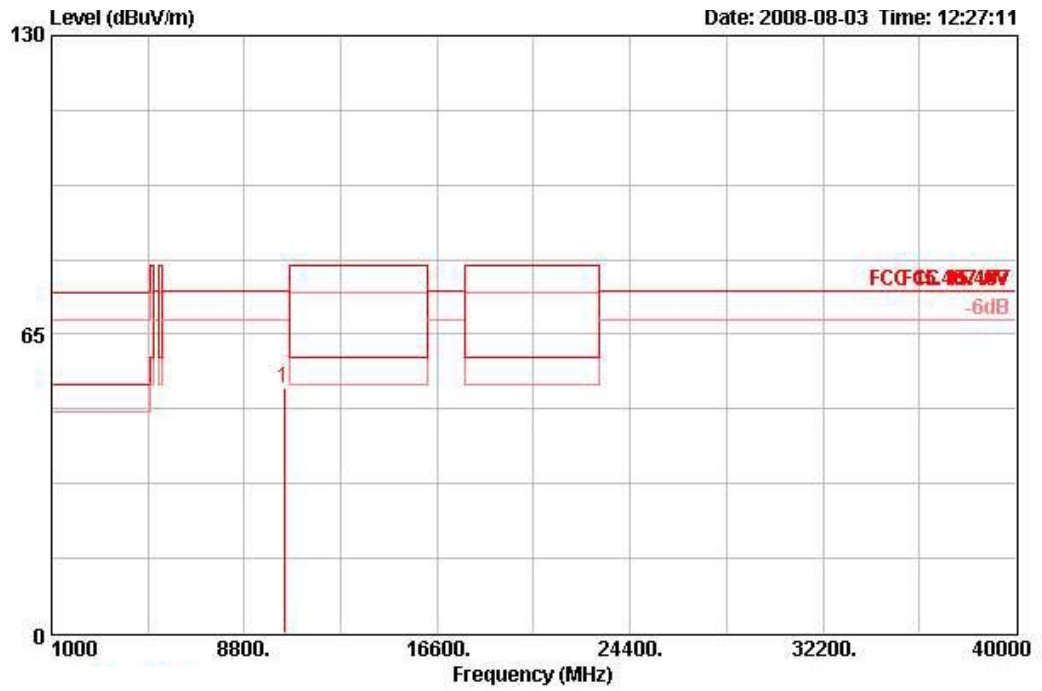


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10405.300	53.24	-21.06	74.30	43.52	38.38	6.39	35.05	PEAK	100	175	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 48 / Ant. 2

**Horizontal**

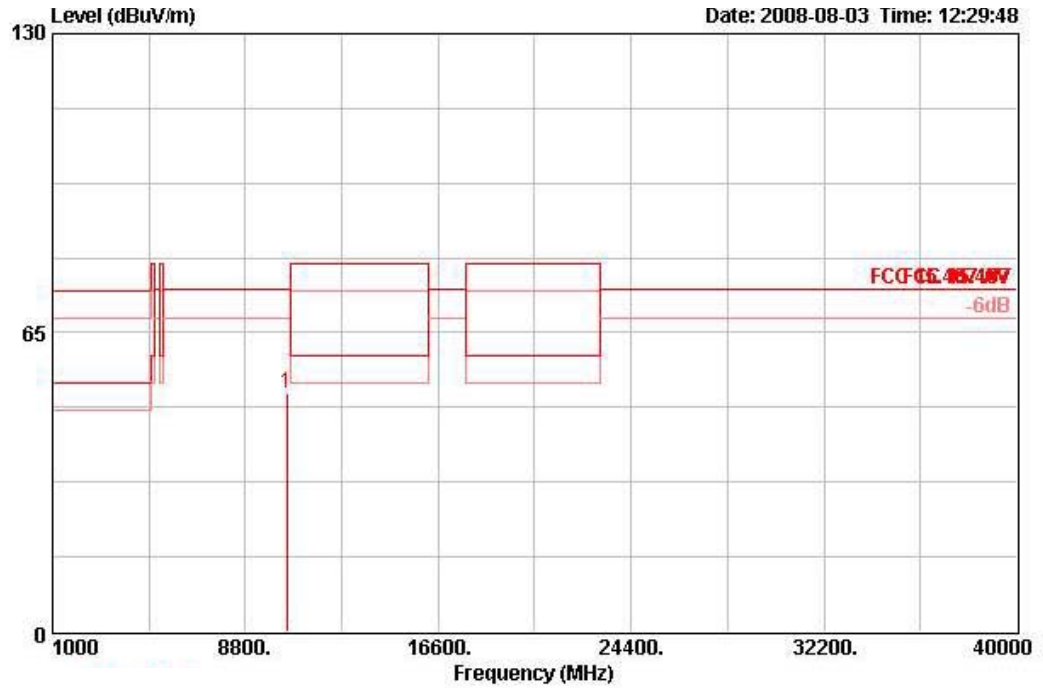

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10487.600	51.85	-22.45	74.30	41.96	38.39	6.46	34.96	PEAK	121	215	HORIZONTAL

**Vertical**

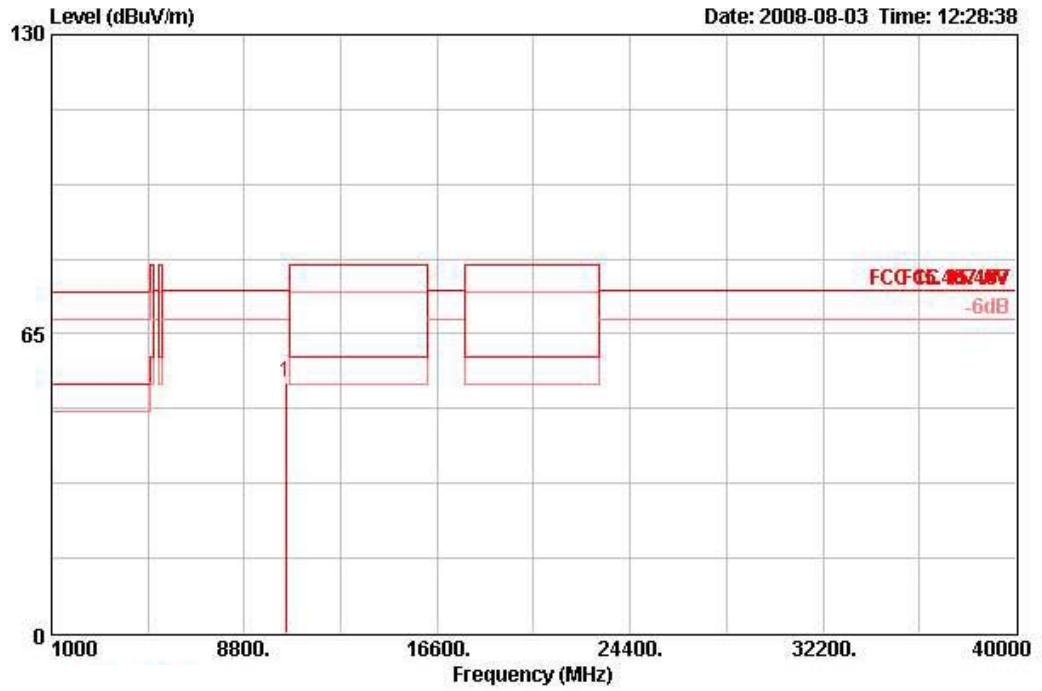


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10476.600	54.37	-19.93	74.30	44.48	38.39	6.46	34.96	PEAK	100	174	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 52 / Ant. 2

**Horizontal**

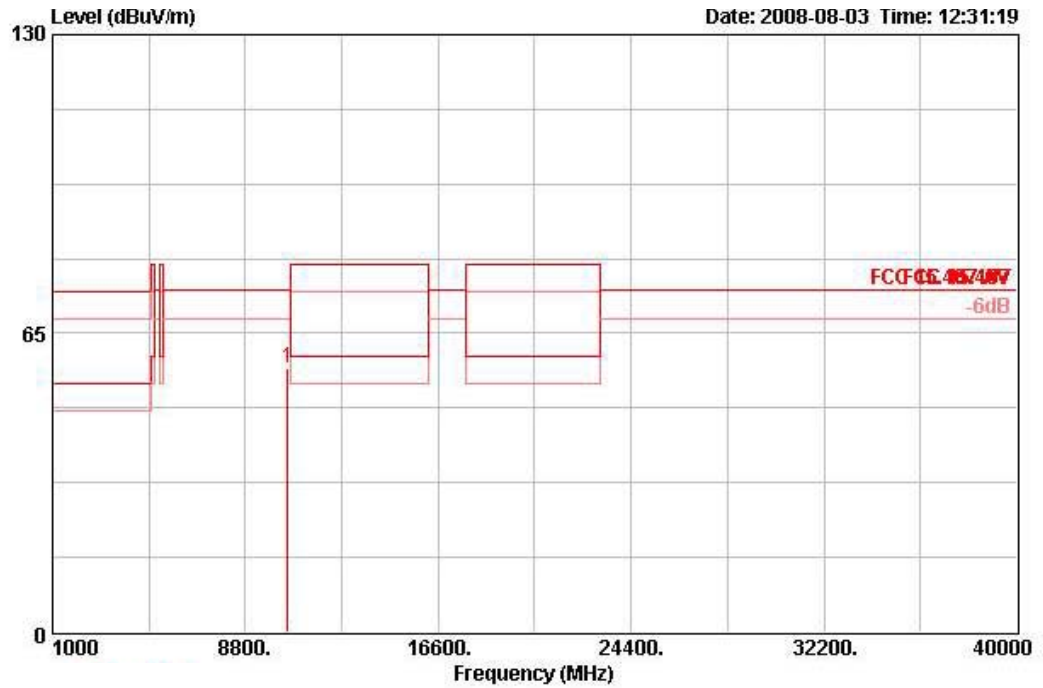

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10516.700	57.25	-17.05	74.30	47.30	38.40	6.48	34.93	PEAK	117	216	HORIZONTAL

**Vertical**

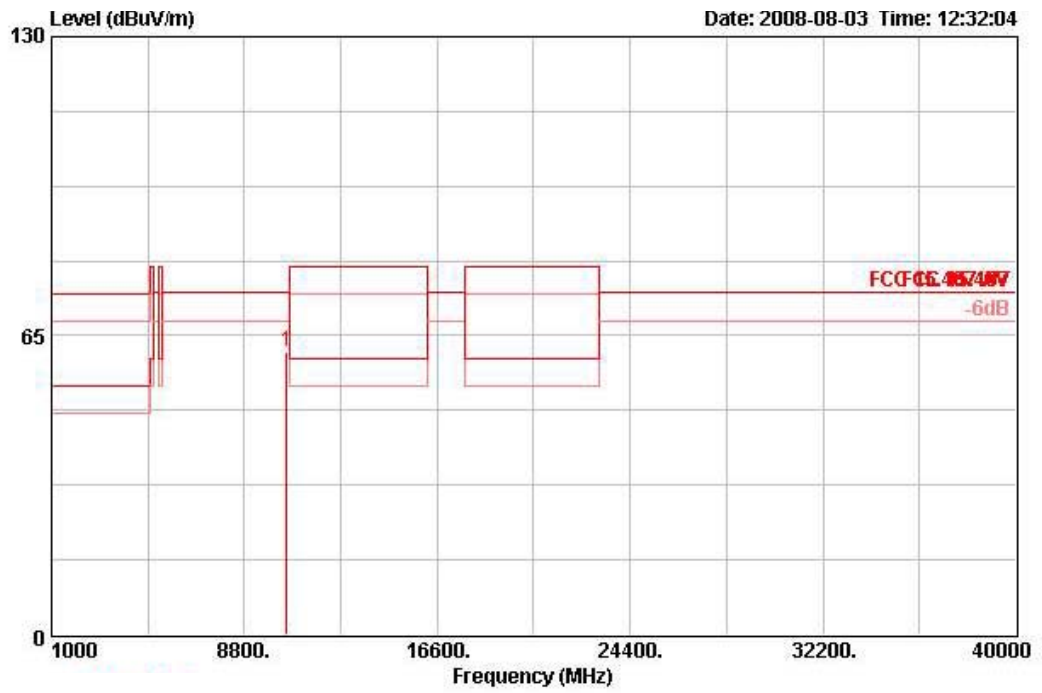


	Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10516.600	61.36	-12.94	74.30	51.41	38.39	6.48	34.93	PEAK	100	179	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 60 / Ant. 2

**Horizontal**

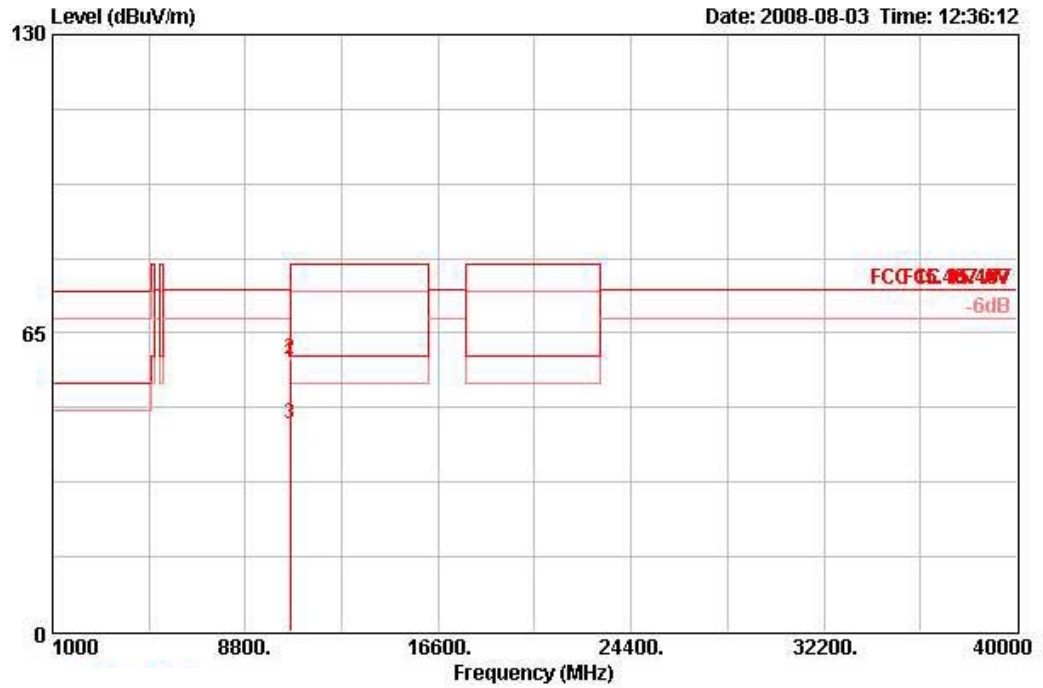

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10598.900	58.67	-15.63	74.30	48.68	38.38	6.51	34.90	PEAK	118	199	HORIZONTAL
2	10604.600	59.16	-20.84	80.00	49.15	38.38	6.52	34.89	PEAK	118	199	HORIZONTAL
3	10605.000	45.29	-14.71	60.00	35.28	38.38	6.52	34.89	AVERAGE	118	199	HORIZONTAL

Vertical

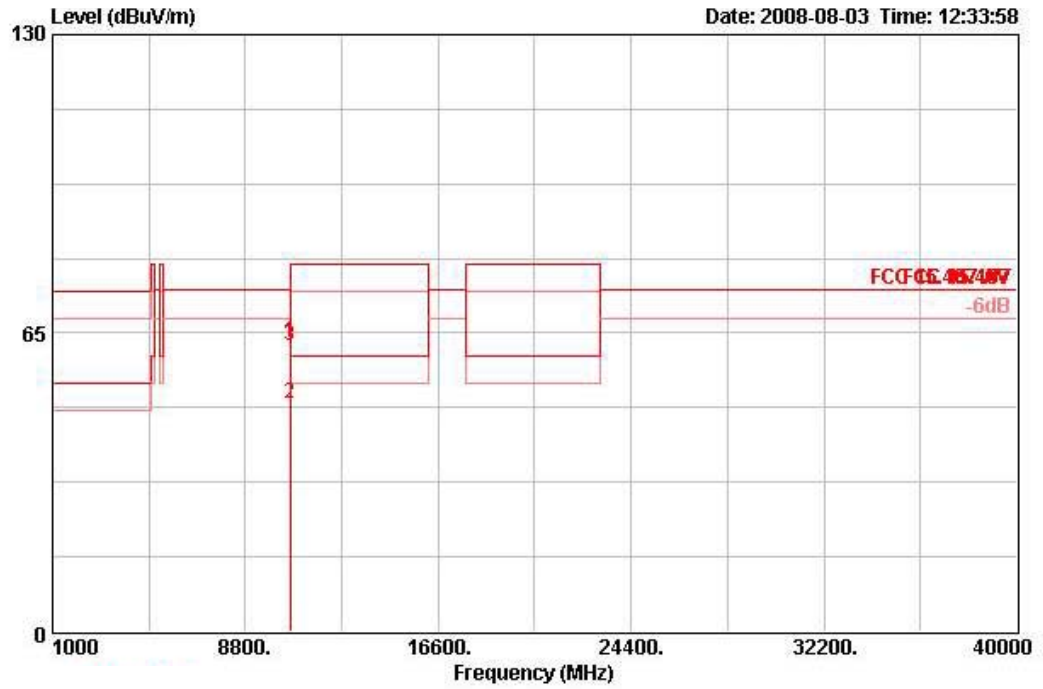


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10599.200	62.82	-11.48	74.30	52.83	38.38	6.51	34.90	PEAK	100	174	VERTICAL
2	10604.100	49.71	-10.29	60.00	39.70	38.38	6.52	34.89	AVERAGE	100	174	VERTICAL
3	10607.800	62.37	-17.63	80.00	52.36	38.38	6.52	34.89	PEAK	100	174	VERTICAL






Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 64 / Ant. 2

Horizontal

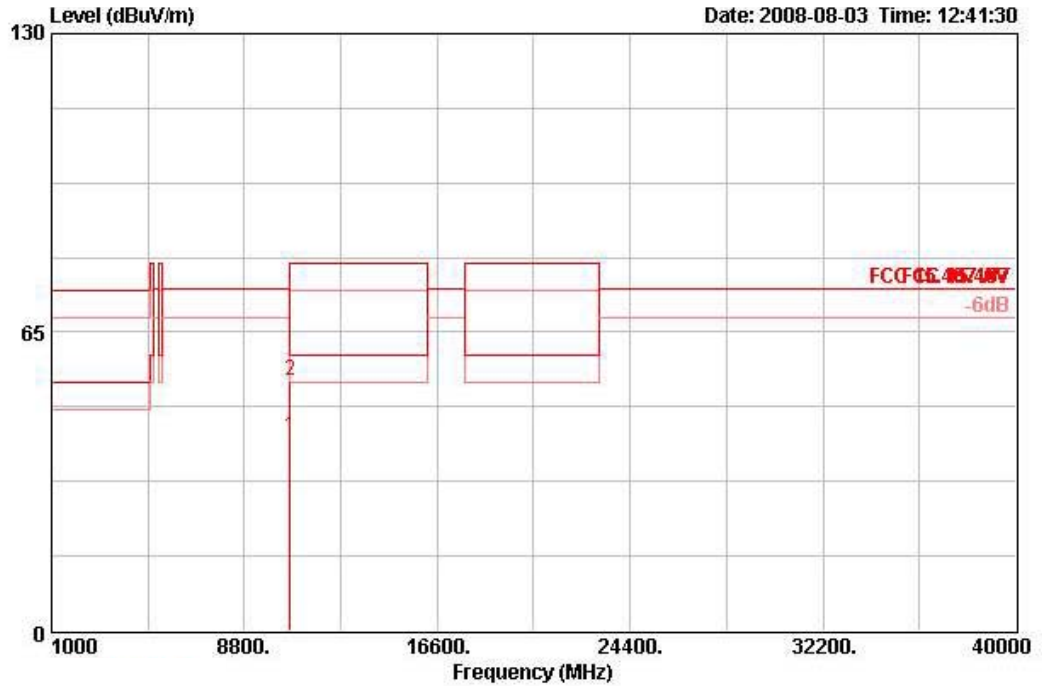

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10636.300	42.18	-17.82	60.00	32.16	38.37	6.53	34.88	AVERAGE	113	202 HORIZONTAL
2	10637.300	54.52	-25.48	80.00	44.50	38.37	6.53	34.88	PEAK	113	202 HORIZONTAL

**Vertical**

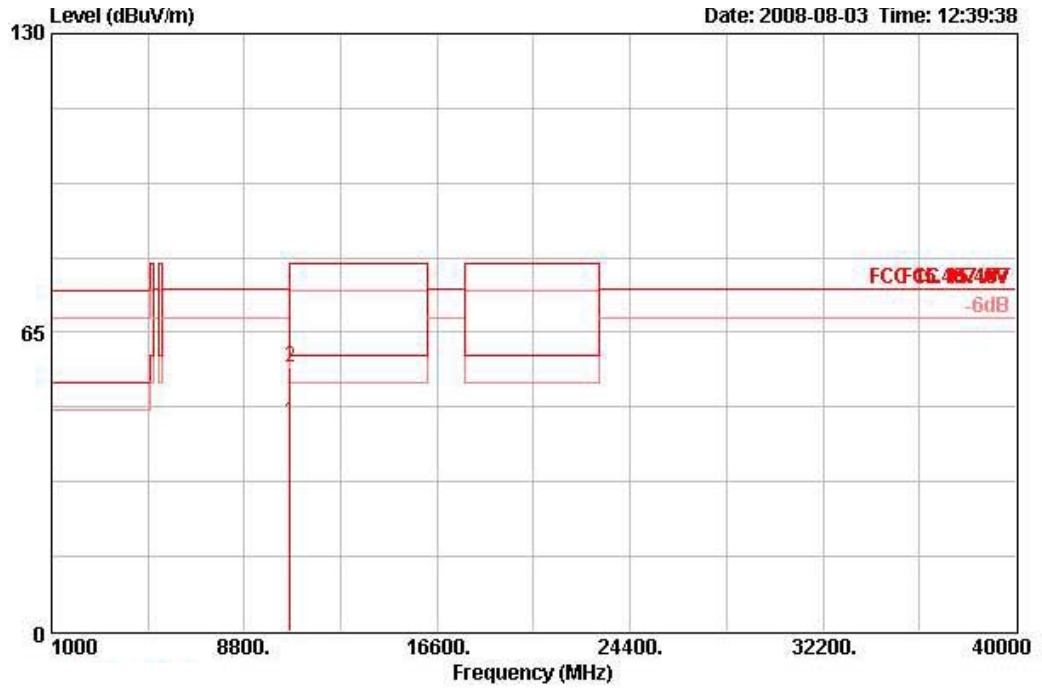


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	10637.000	45.58	-14.42	60.00	35.56	38.37	6.53	34.88	AVERAGE	100	175 VERTICAL
2	10638.200	57.54	-22.46	80.00	47.53	38.37	6.53	34.88	PEAK	100	175 VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 100 / Ant. 2

Horizontal

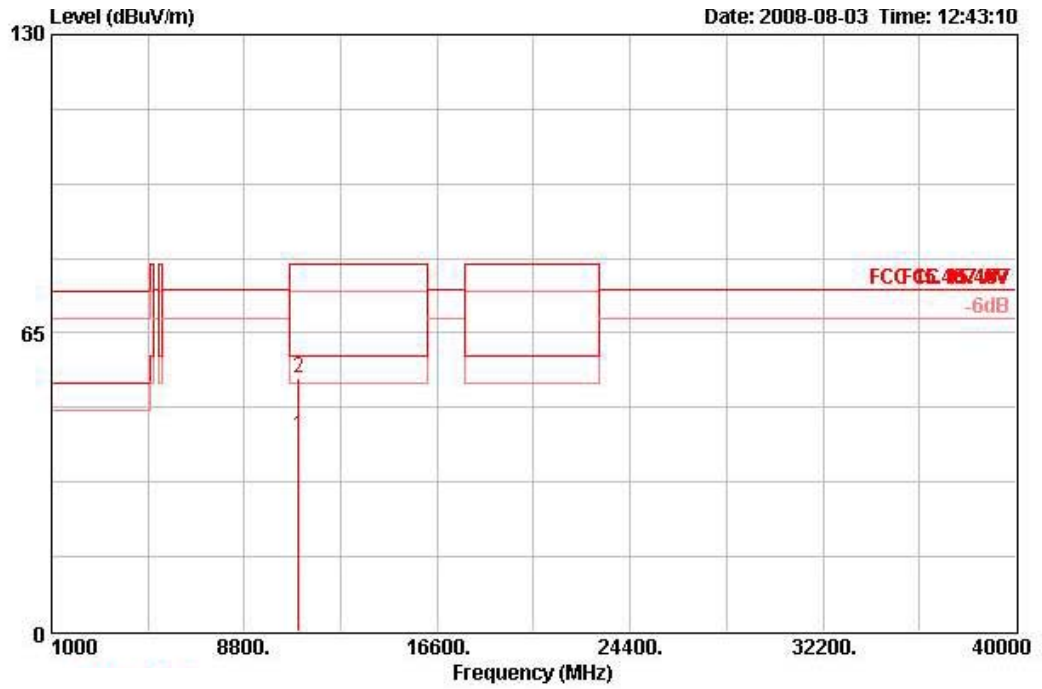

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.900	42.69	-17.31	60.00	32.50	38.32	6.63	34.76	AVERAGE	111	208	HORIZONTAL
2	11001.200	55.36	-24.64	80.00	45.17	38.32	6.63	34.76	PEAK	111	208	HORIZONTAL


**Vertical**

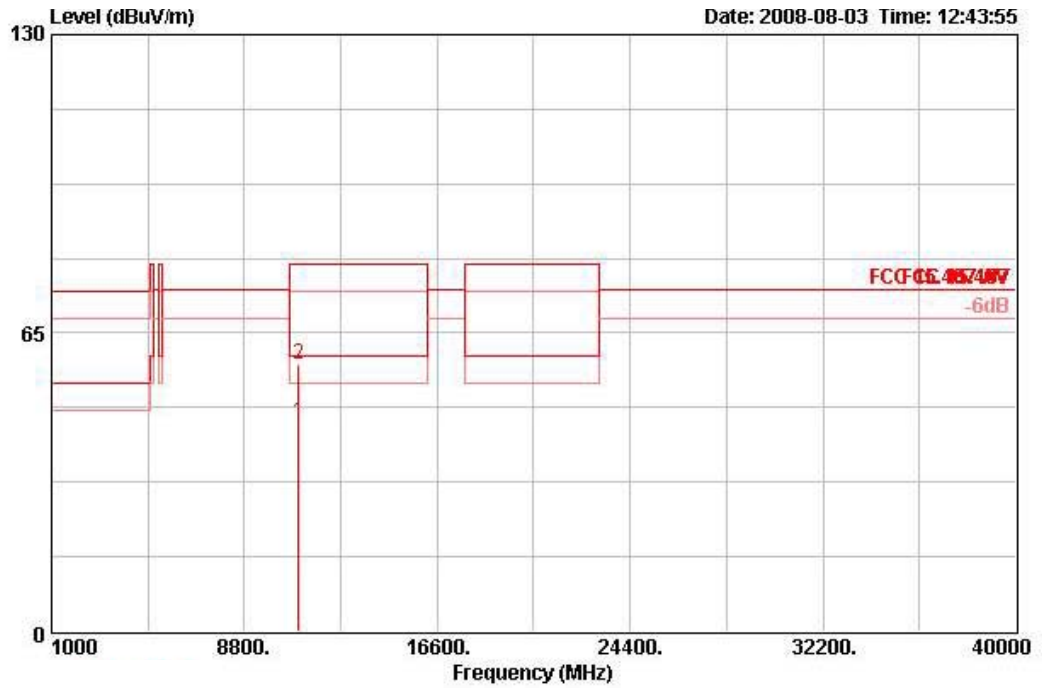

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11000.400	45.52	-14.48	60.00	35.35	38.30	6.63	34.76	AVERAGE	100	175	VERTICAL
2	11000.600	58.32	-21.68	80.00	48.15	38.30	6.63	34.76	PEAK	100	175	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 116 / Ant. 2

**Horizontal**

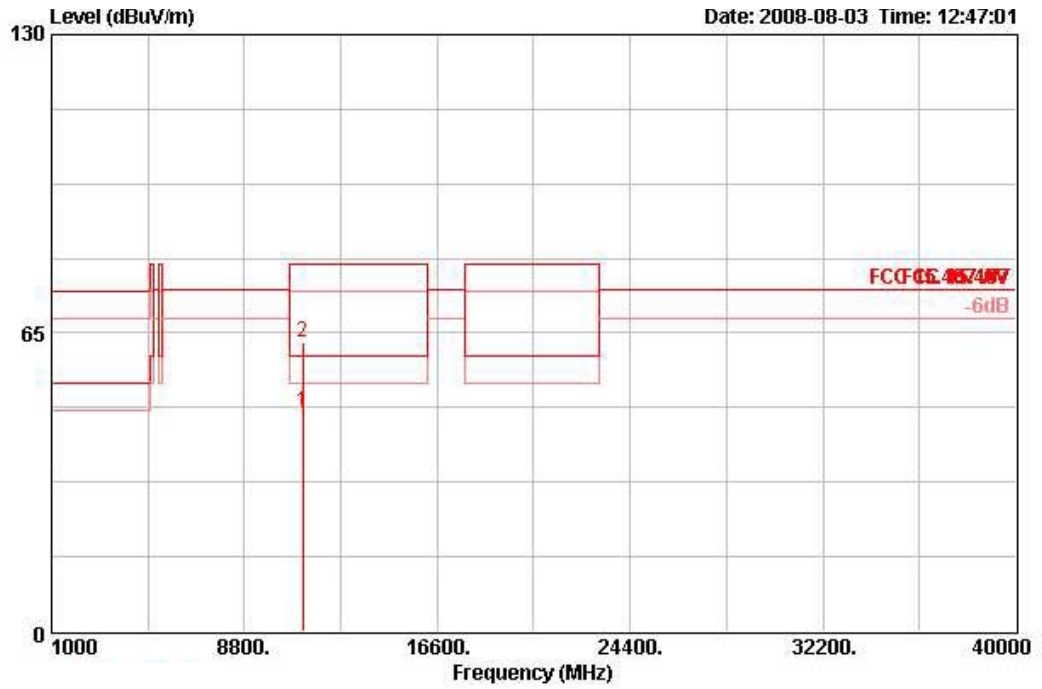

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11154.900	47.62	-12.38	60.00	37.36	38.45	6.65	34.83	AVERAGE	114	209	HORIZONTAL
2	11156.000	63.09	-16.91	80.00	52.82	38.45	6.65	34.83	PEAK	114	209	HORIZONTAL


**Vertical**

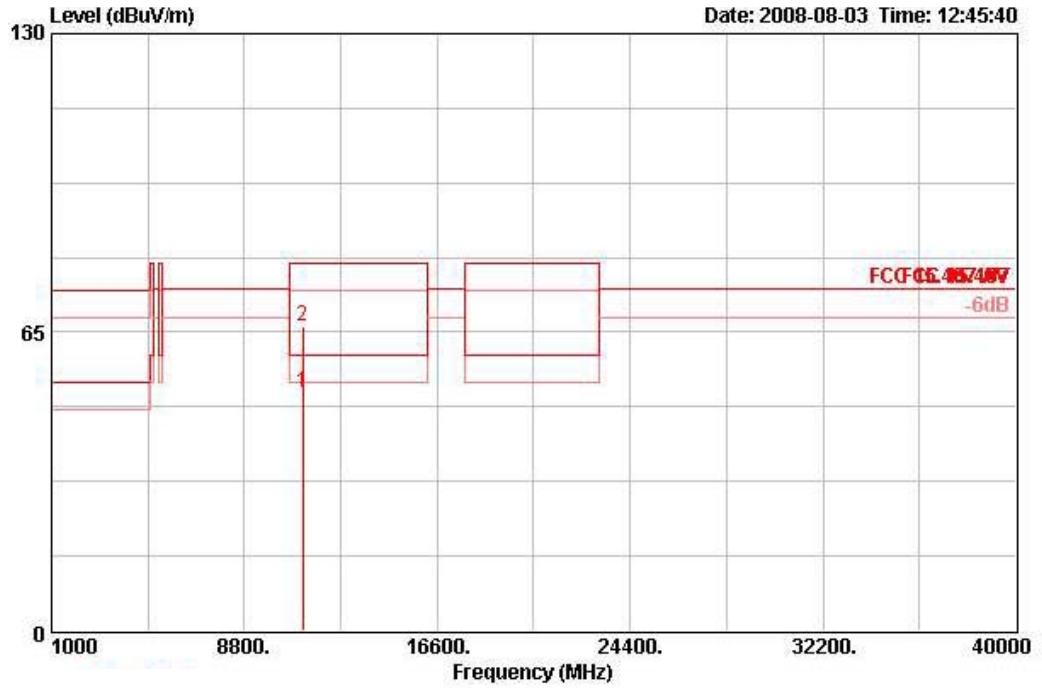

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11152.300	51.78	-8.22	60.00	41.51	38.45	6.65	34.83	AVERAGE	100	177	VERTICAL
2	11152.300	66.15	-13.85	80.00	55.88	38.45	6.65	34.83	Peak	100	177	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 140 / Ant. 2

**Horizontal**

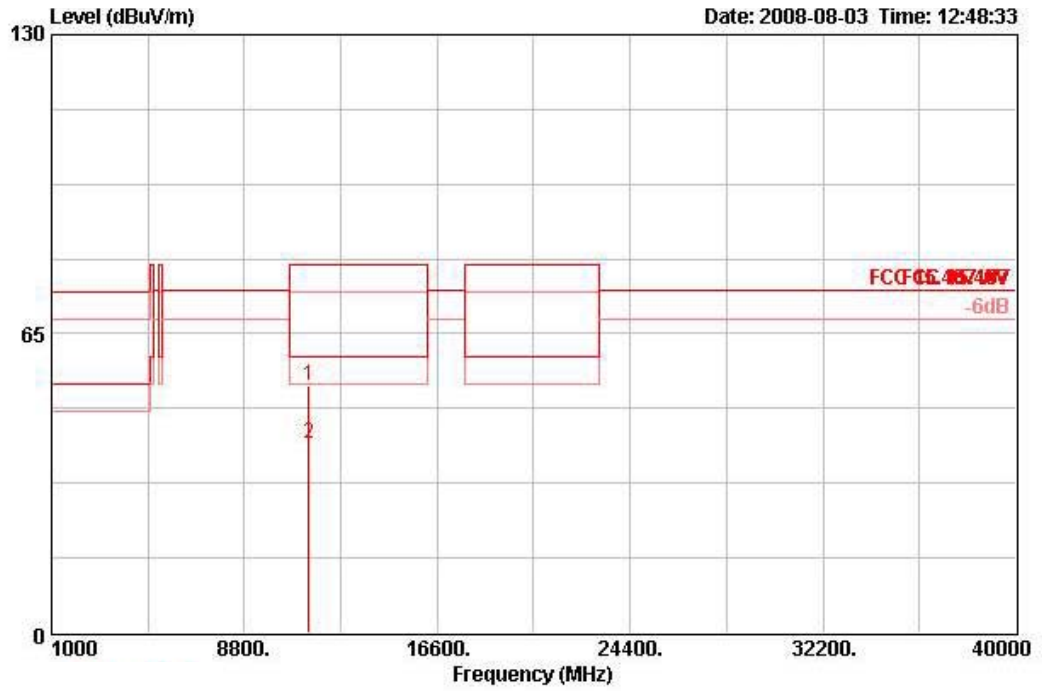

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11400.700	53.78	-26.22	80.00	43.36	38.70	6.67	34.95	PEAK	107	217	HORIZONTAL
2	11401.700	41.05	-18.95	60.00	30.62	38.70	6.67	34.95	AVERAGE	107	217	HORIZONTAL

**Vertical**

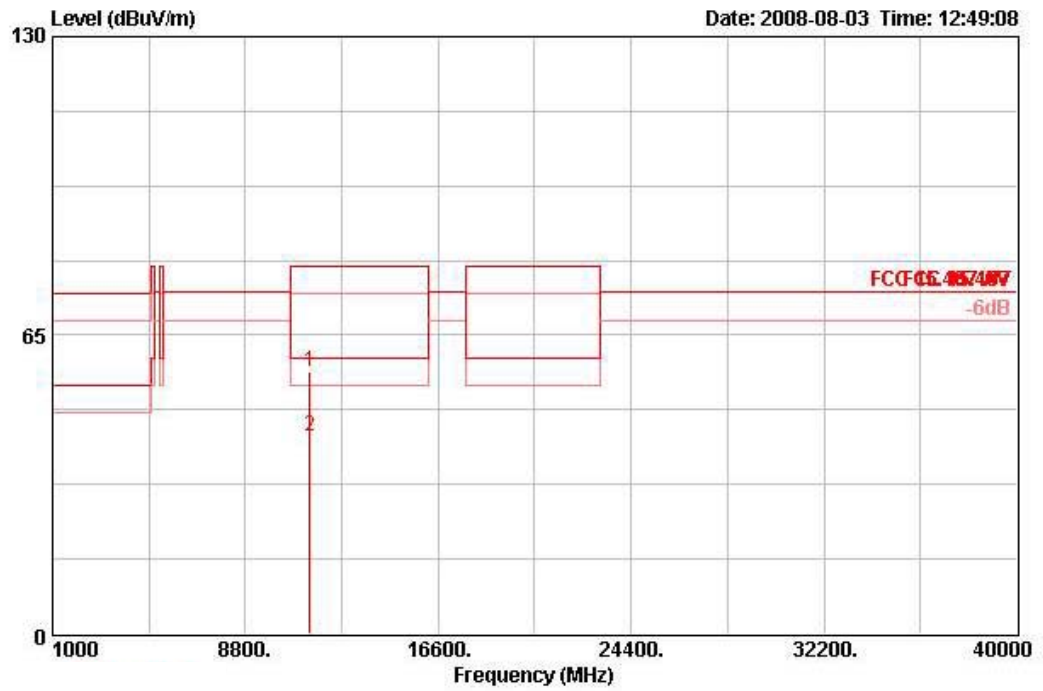


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11400.400	57.11	-22.89	80.00	46.69	38.70	6.67	34.95	PEAK	100	181	VERTICAL
2	11401.300	43.01	-16.99	60.00	32.59	38.70	6.67	34.95	AVERAGE	100	181	VERTICAL






Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 38 / Ant. 2

**Horizontal**

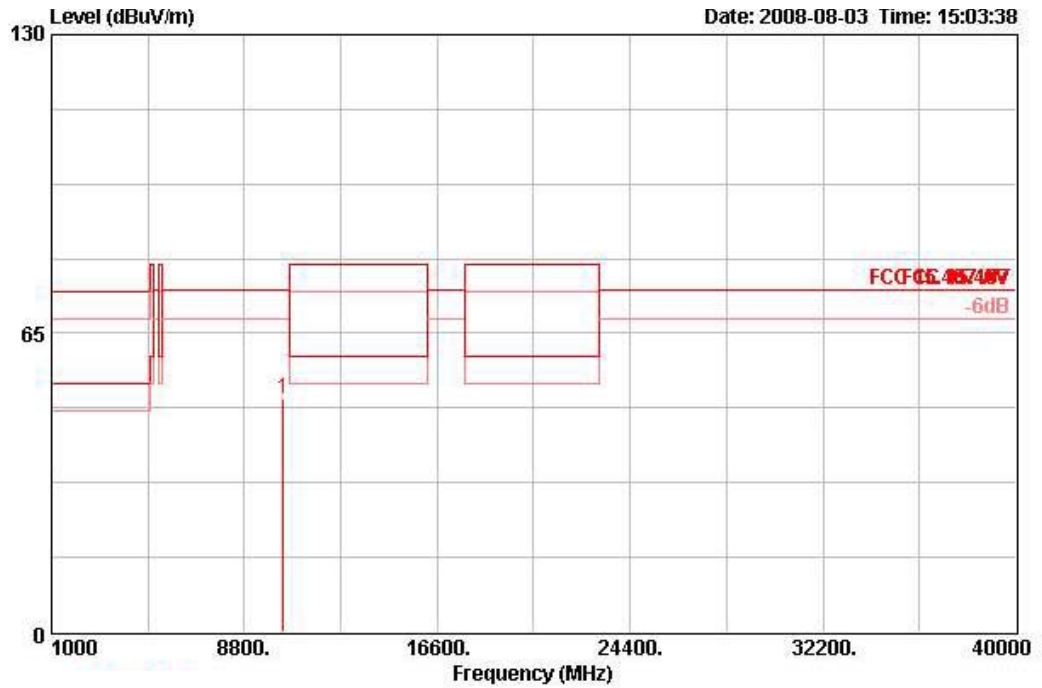

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10380.200	50.79	-23.51	74.30	41.13	38.38	6.37	35.09	PEAK	126	221	HORIZONTAL

**Vertical**

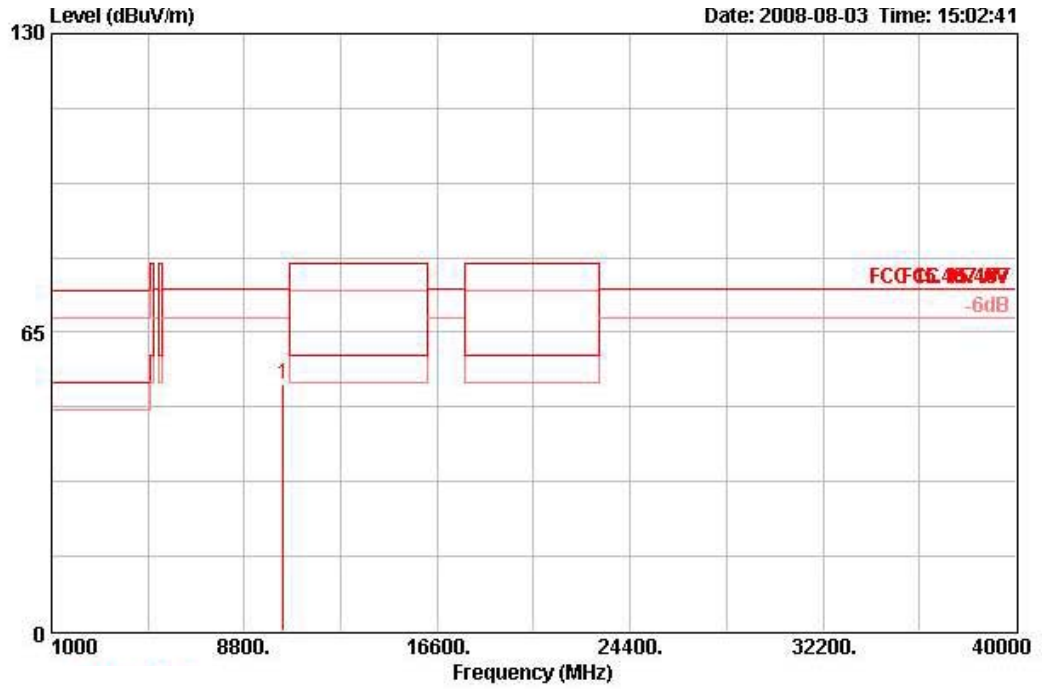


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10376.300	53.88	-20.42	74.30	44.22	38.38	6.37	35.09	PEAK	100	174	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 46 / Ant. 2

**Horizontal**

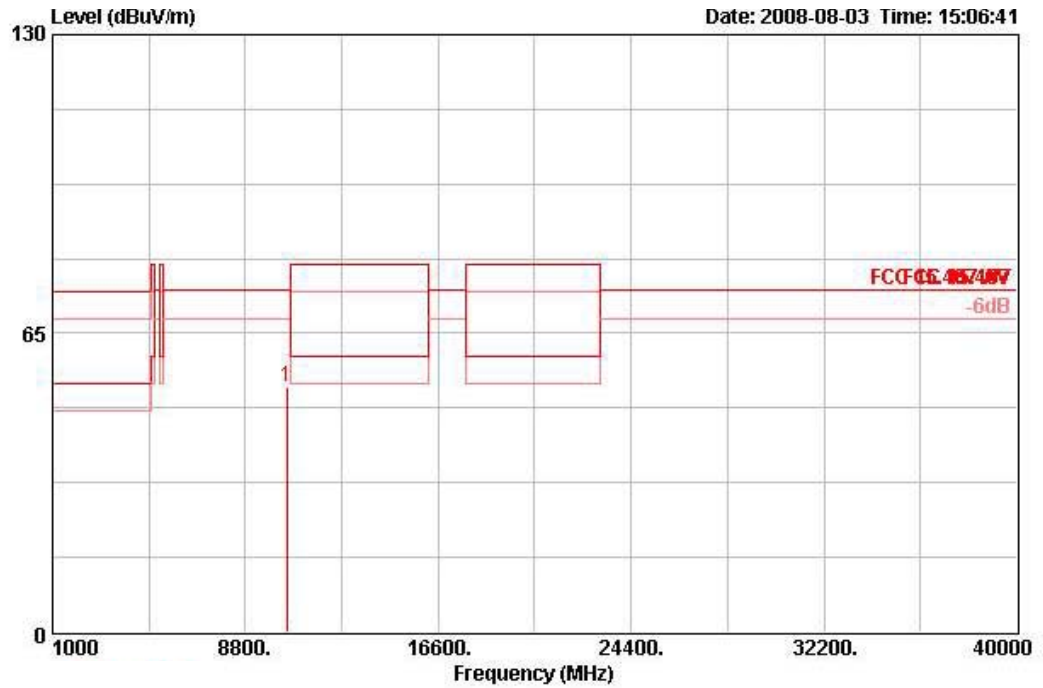

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10461.200	53.23	-21.07	74.30	43.39	38.39	6.44	34.99	PEAK	122	198	HORIZONTAL

Vertical

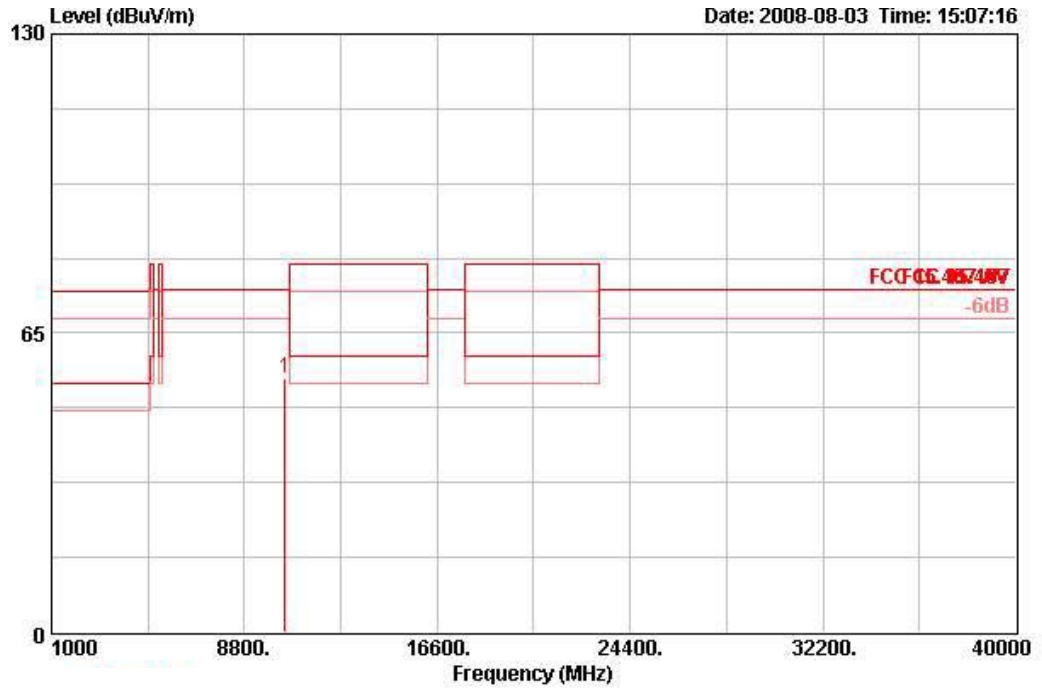


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10456.600	55.06	-19.24	74.30	45.22	38.39	6.44	34.99	PEAK	100	178	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 54 / Ant. 2

**Horizontal**

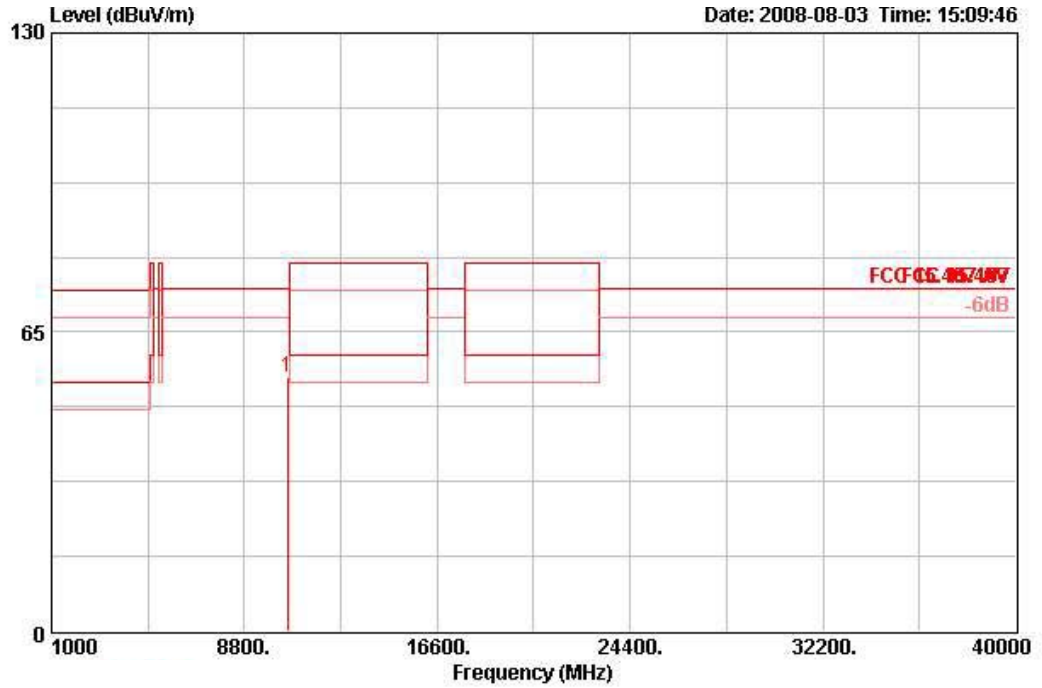

	Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10536.400	55.00	-19.30	74.30	45.03	38.39	6.50	34.92	PEAK	123	203	HORIZONTAL


**Vertical**

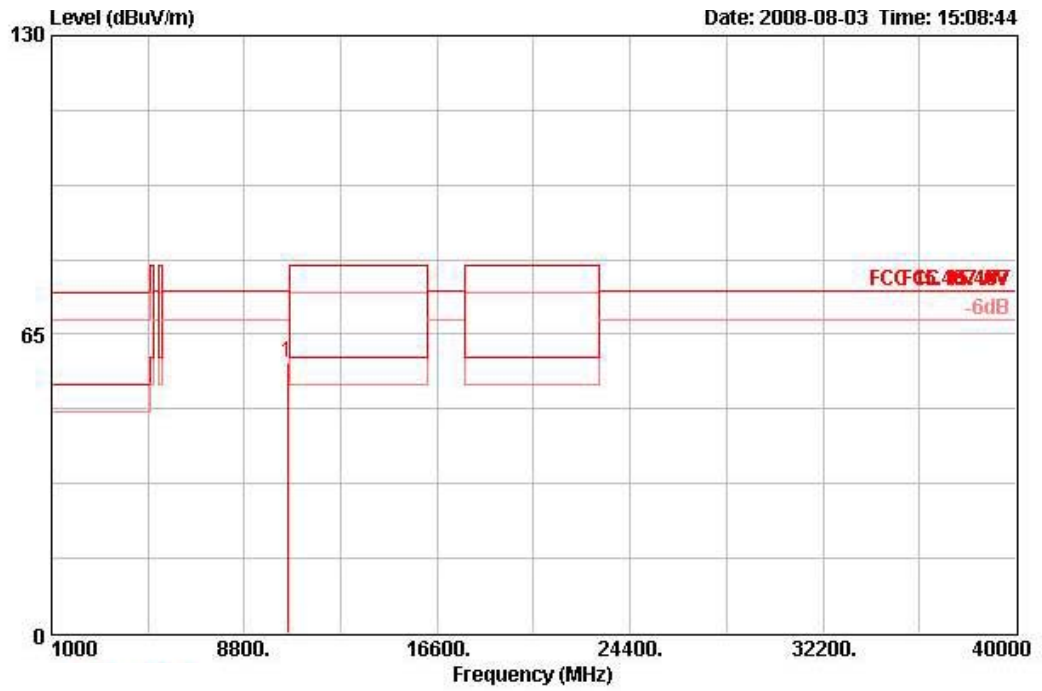

	Freq	Level	Over Limit	Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10536.800	58.82	-15.48	74.30	48.85	38.39	6.50	34.92	PEAK	100	176	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 62 / Ant. 2

**Horizontal**

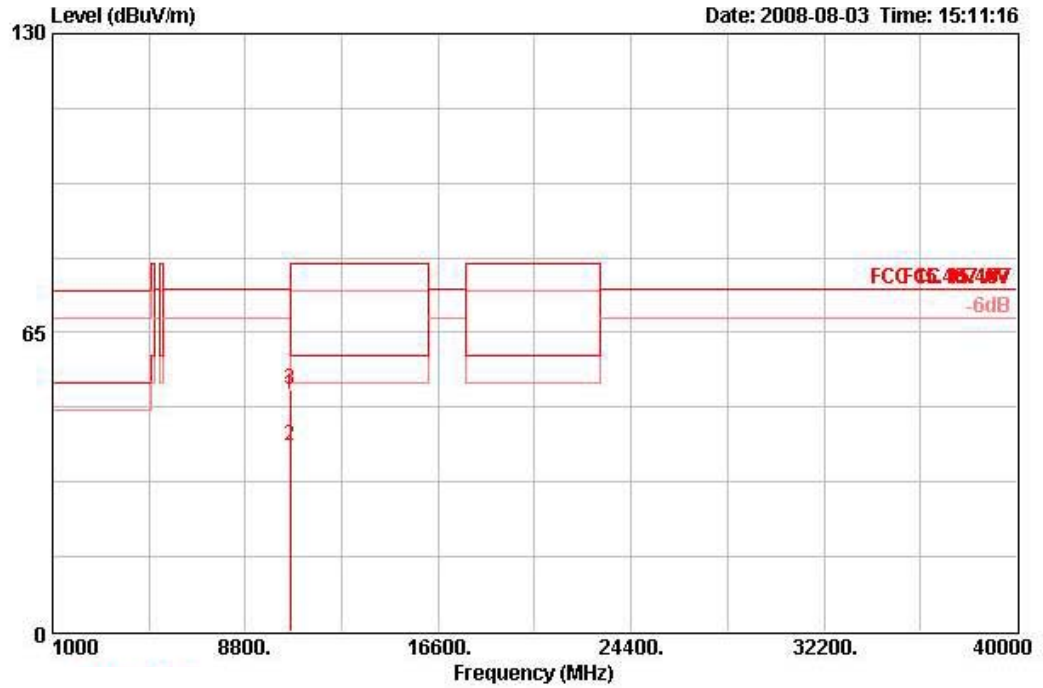

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10596.600	51.52	-22.78	74.30	41.53	38.38	6.51	34.90	PEAK	122	214	HORIZONTAL
2	10615.800	40.48	-19.52	60.00	30.48	38.38	6.52	34.89	AVERAGE	122	214	HORIZONTAL
3	10622.800	52.49	-27.51	80.00	42.48	38.38	6.52	34.89	PEAK	122	214	HORIZONTAL

Vertical

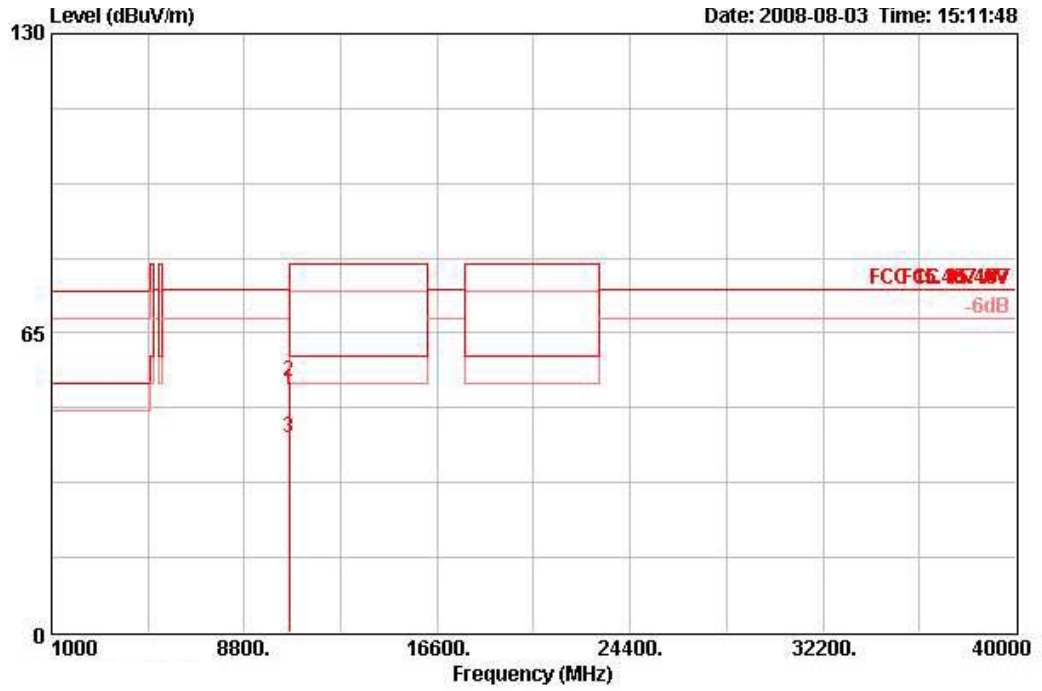


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10595.800	52.42	-21.88	74.30	42.43	38.38	6.51	34.90	PEAK	100	178	VERTICAL
2	10624.600	54.38	-25.62	80.00	44.37	38.38	6.52	34.89	PEAK	100	178	VERTICAL
3	10626.200	42.28	-17.72	60.00	32.28	38.38	6.52	34.89	AVERAGE	100	178	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 102 / Ant. 2

**Horizontal**

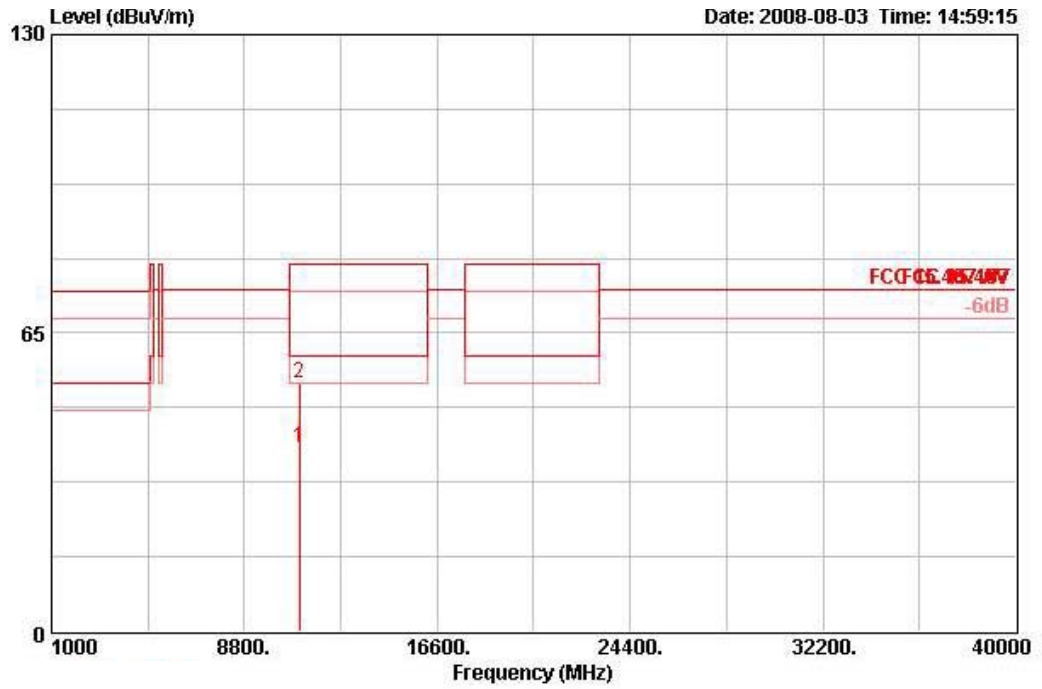

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11013.500	40.08	-19.92	60.00	29.88	38.33	6.63	34.77	AVERAGE	113	211	HORIZONTAL
2	11020.400	53.96	-26.04	80.00	43.77	38.33	6.63	34.77	PEAK	113	211	HORIZONTAL

**Vertical**

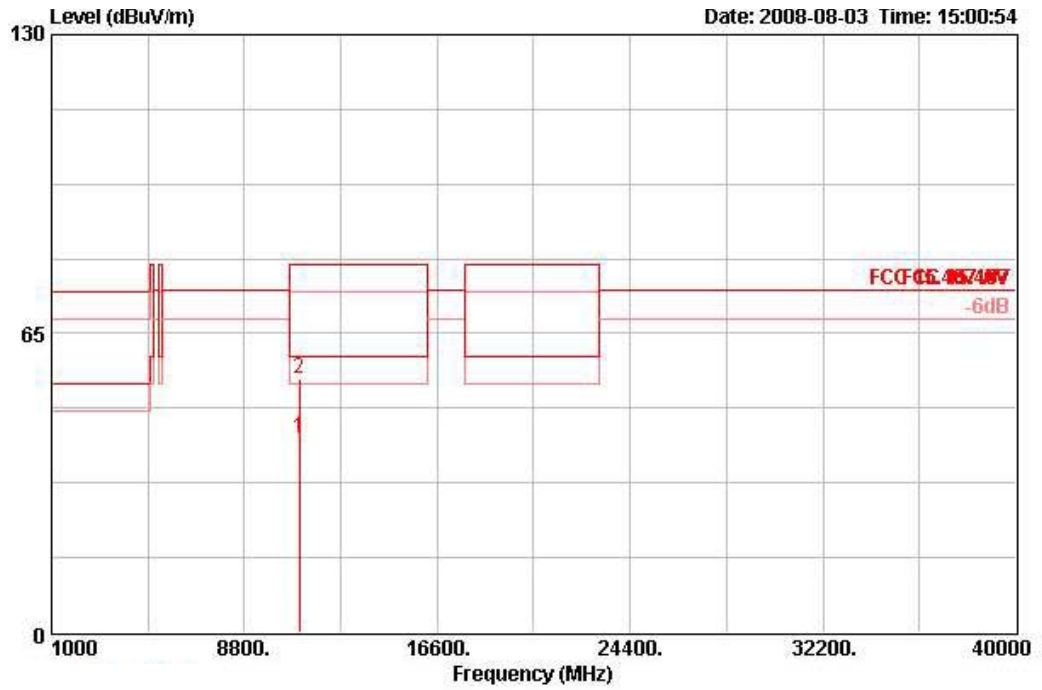


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11019.000	42.19	-17.81	60.00	32.01	38.32	6.63	34.77	AVERAGE	100	178	VERTICAL
2	11020.000	55.37	-24.63	80.00	45.18	38.32	6.63	34.77	PEAK	100	178	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 110 / Ant. 2

Horizontal

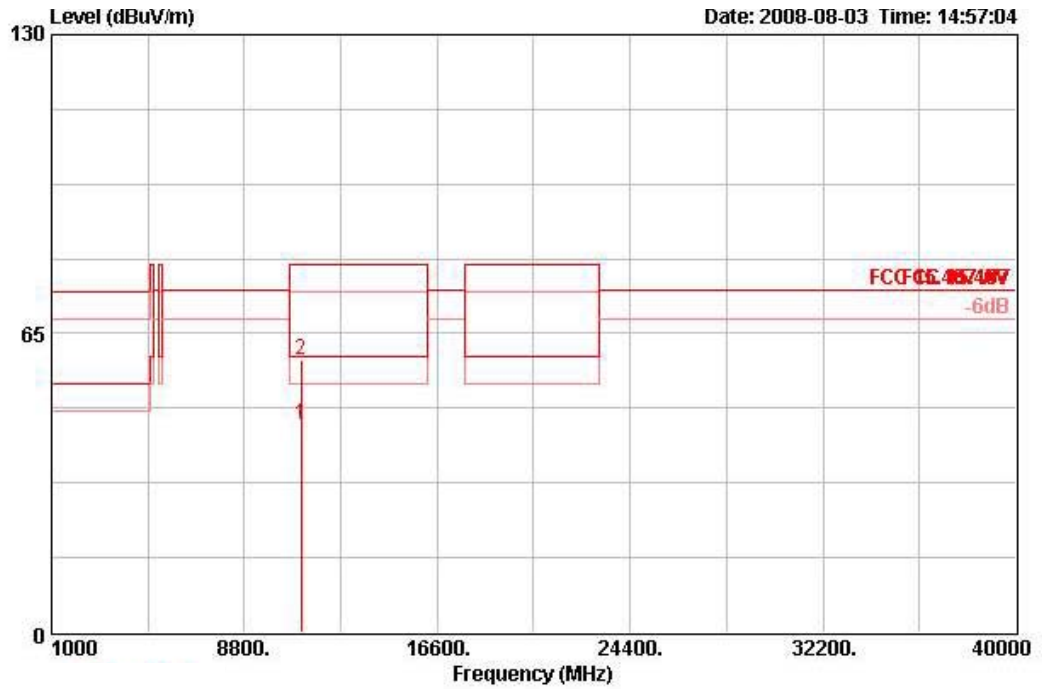

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11098.800	45.00	-15.00	60.00	34.77	38.40	6.64	34.80	AVERAGE	106	211	HORIZONTAL
2	11098.800	59.18	-20.82	80.00	48.95	38.40	6.64	34.80	PEAK	106	211	HORIZONTAL


**Vertical**

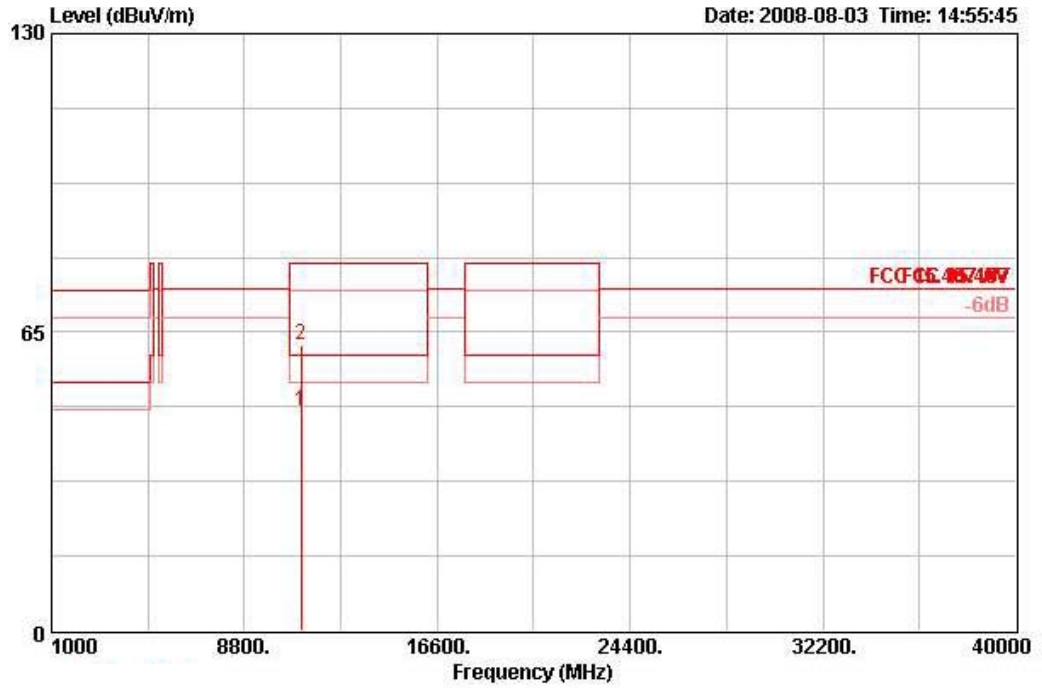

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11092.400	47.79	-12.21	60.00	37.55	38.40	6.64	34.80	AVERAGE	100	180	VERTICAL
2	11108.700	62.21	-17.79	80.00	51.96	38.42	6.64	34.80	PEAK	100	180	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 134 / Ant. 2

**Horizontal**

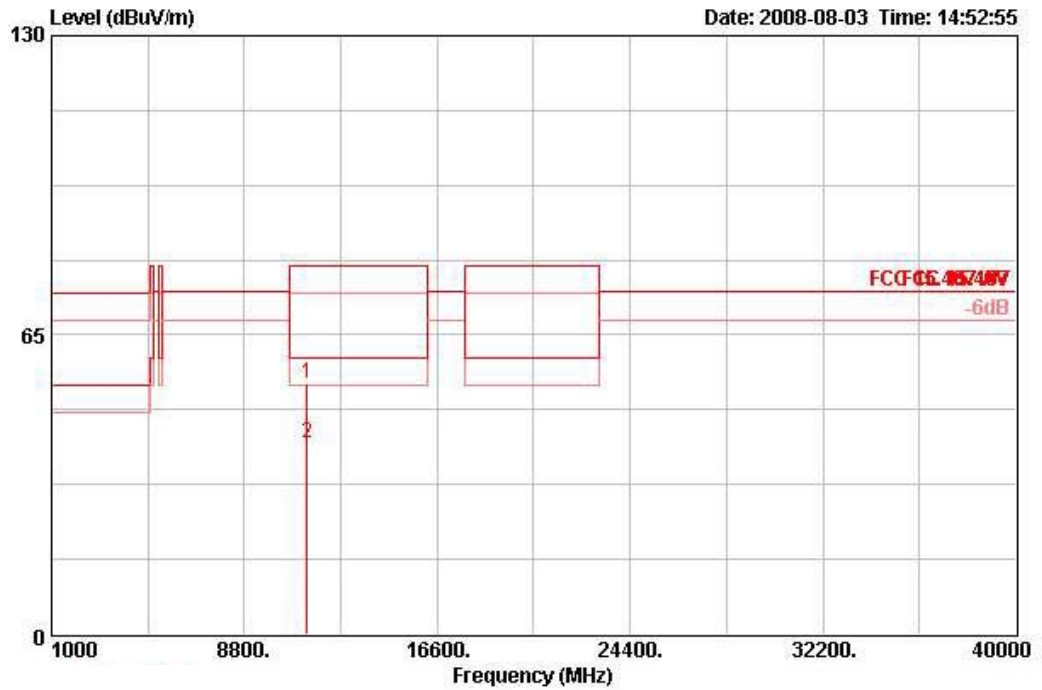

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11339.800	54.30	-25.70	80.00	43.91	38.63	6.66	34.91	PEAK	107	223	HORIZONTAL
2	11346.000	41.40	-18.60	60.00	31.01	38.65	6.67	34.92	AVERAGE	107	223	HORIZONTAL

**Vertical**

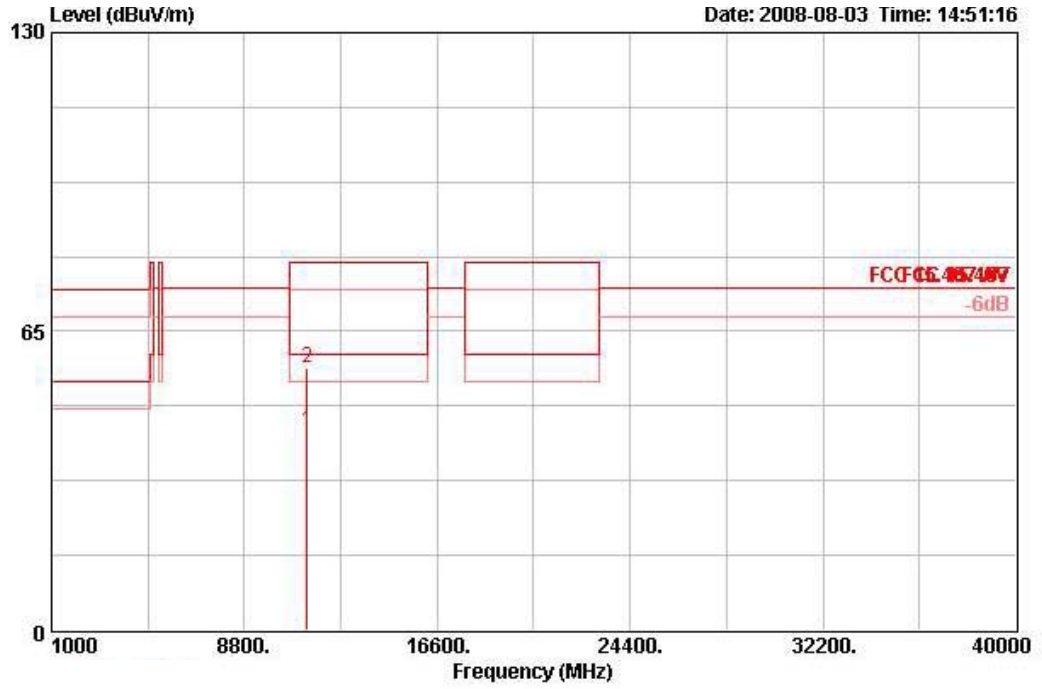


	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	11339.400	43.44	-16.56	60.00	33.05	38.63	6.66	34.91	AVERAGE	100	183 VERTICAL
2	11340.200	57.19	-22.81	80.00	46.80	38.63	6.66	34.91	PEAK	100	183 VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 36 / Ant. 2

**Horizontal**

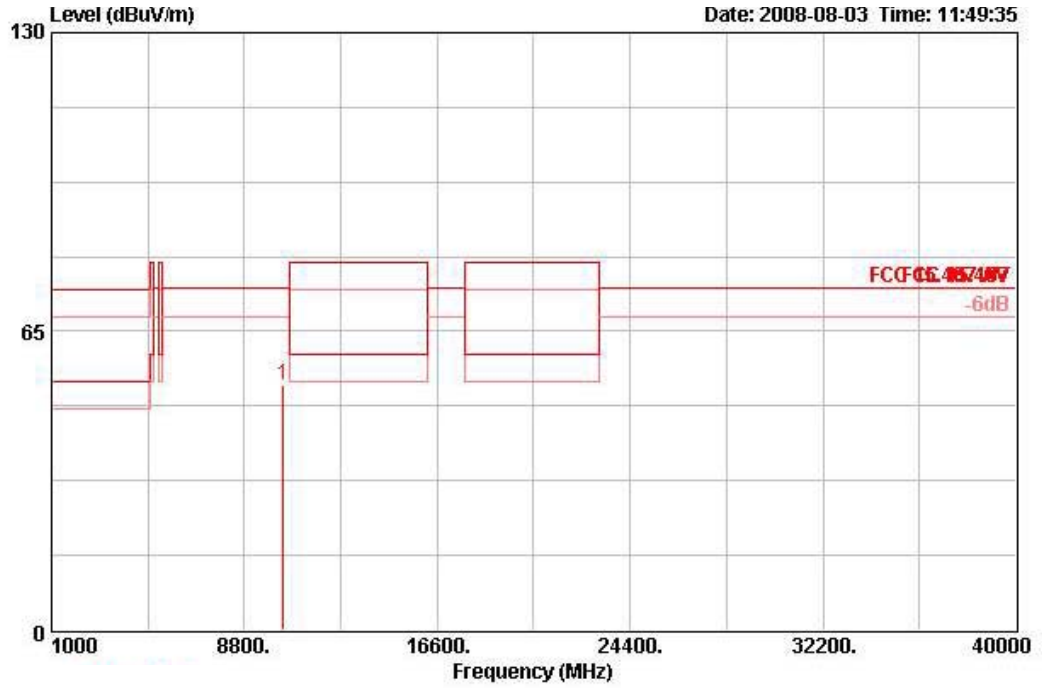

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10355.900	53.51	-20.79	74.30	43.92	38.37	6.34	35.12	PEAK	120	198	HORIZONTAL

**Vertical**

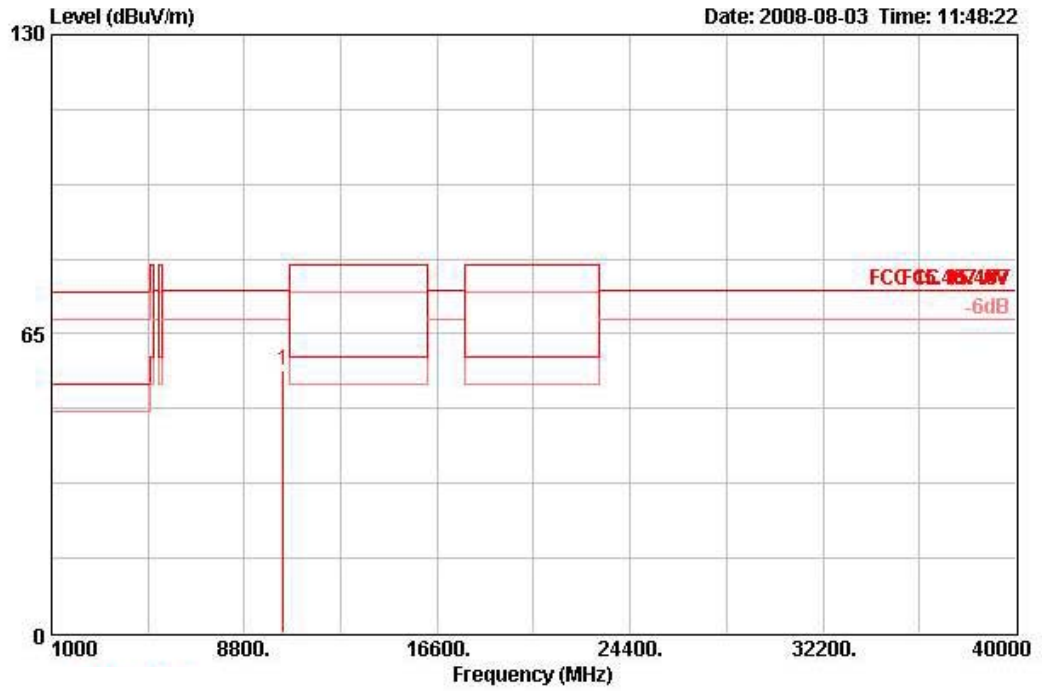


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10355.900	57.20	-17.10	74.30	47.60	38.37	6.34	35.12	PEAK	100	168	VERTICAL






Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 40 / Ant. 2

**Horizontal**

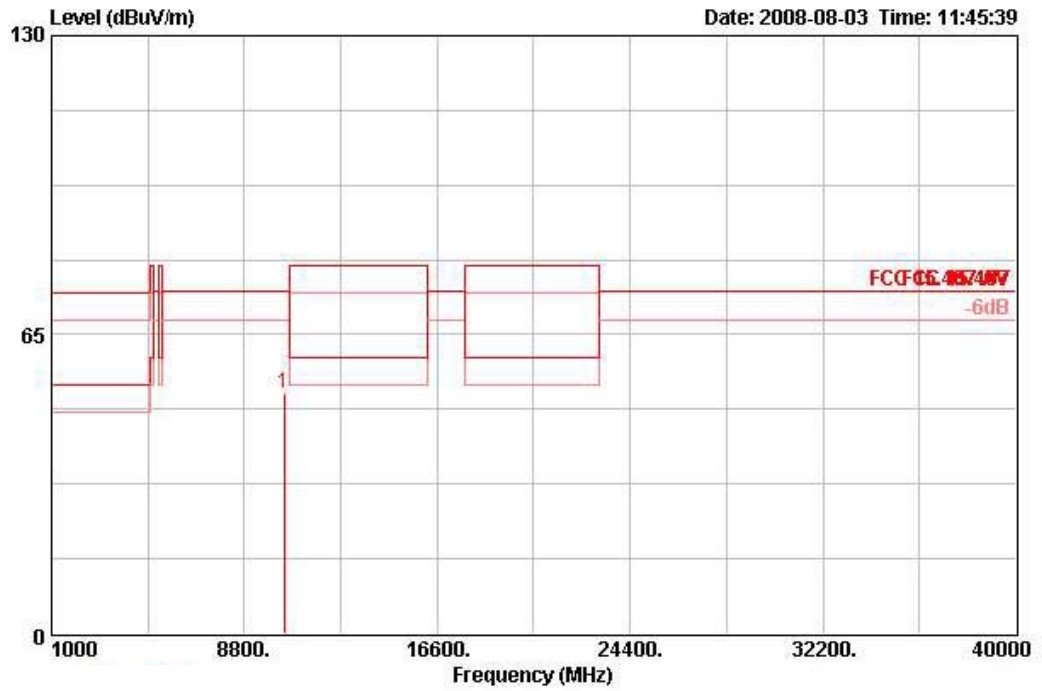

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10396.300	52.29	-22.01	74.30	42.63	38.38	6.37	35.09	PEAK	111	203	HORIZONTAL

**Vertical**

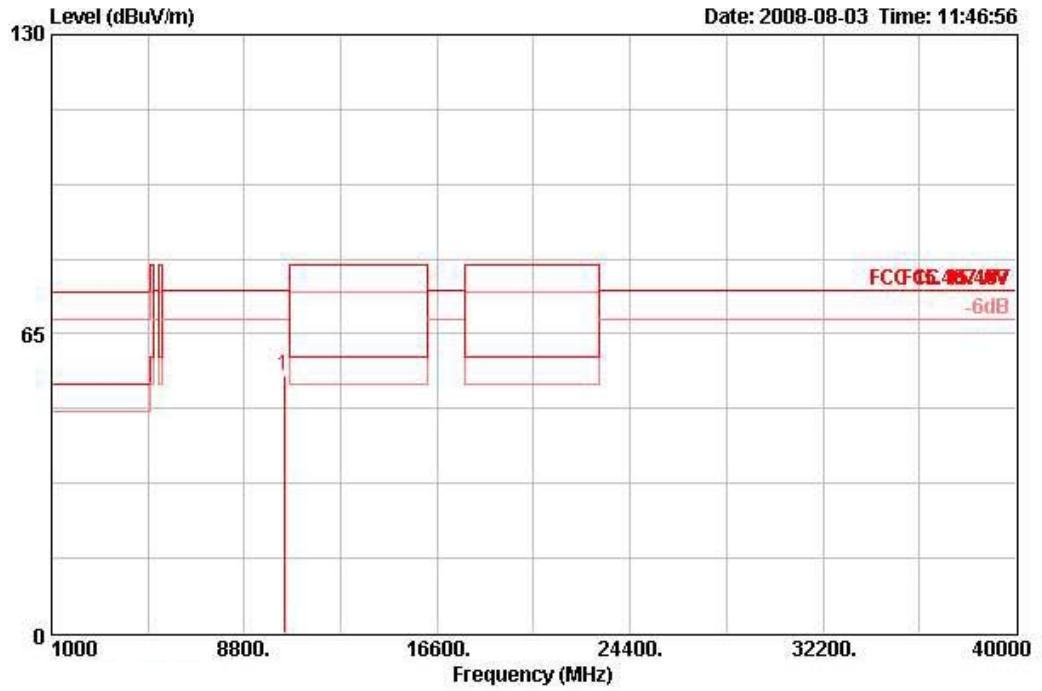


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10406.100	55.86	-18.44	74.30	46.14	38.38	6.39	35.05	PEAK	100	178	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 48 / Ant. 2

**Horizontal**

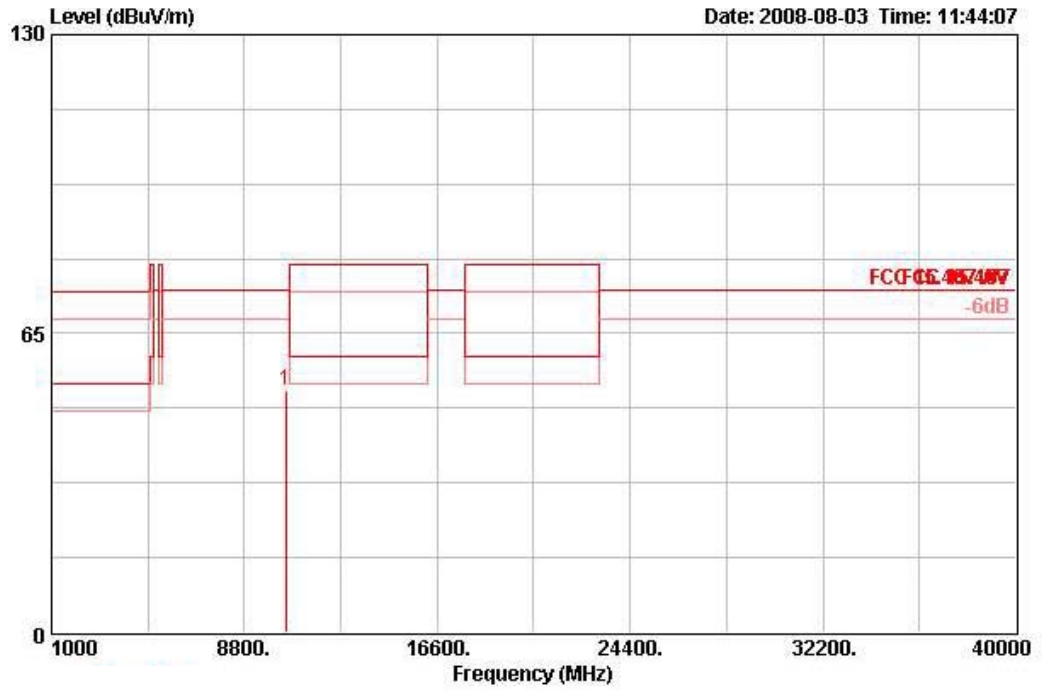

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10475.500	52.58	-21.72	74.30	42.69	38.39	6.46	34.96	PEAK	103	205	HORIZONTAL

Vertical

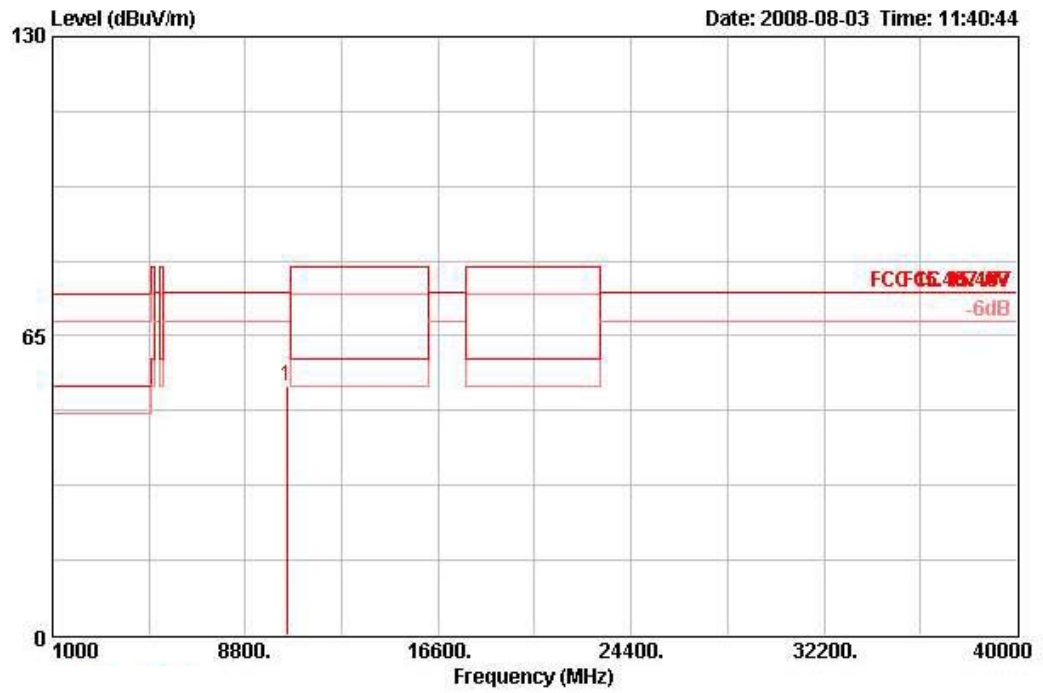


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10476.100	54.19	-20.11	74.30	44.30	38.39	6.46	34.96	PEAK	100	187	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 52 / Ant. 2

**Horizontal**

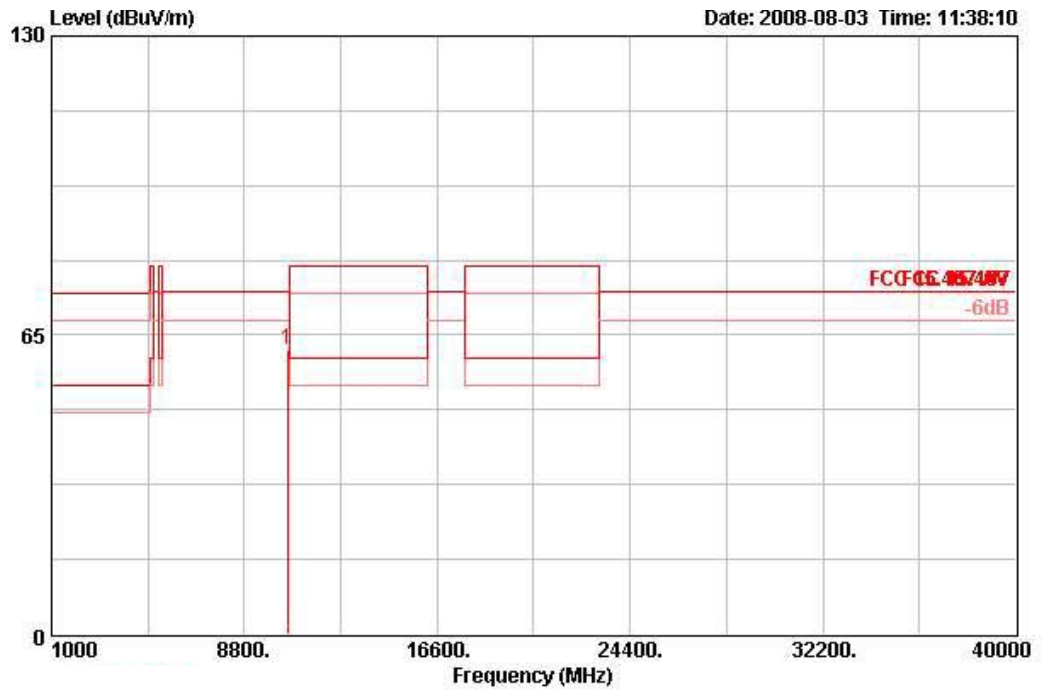

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10526.500	61.96	-12.34	74.30	51.99	38.40	6.50	34.92	PEAK	118	200	HORIZONTAL

Vertical

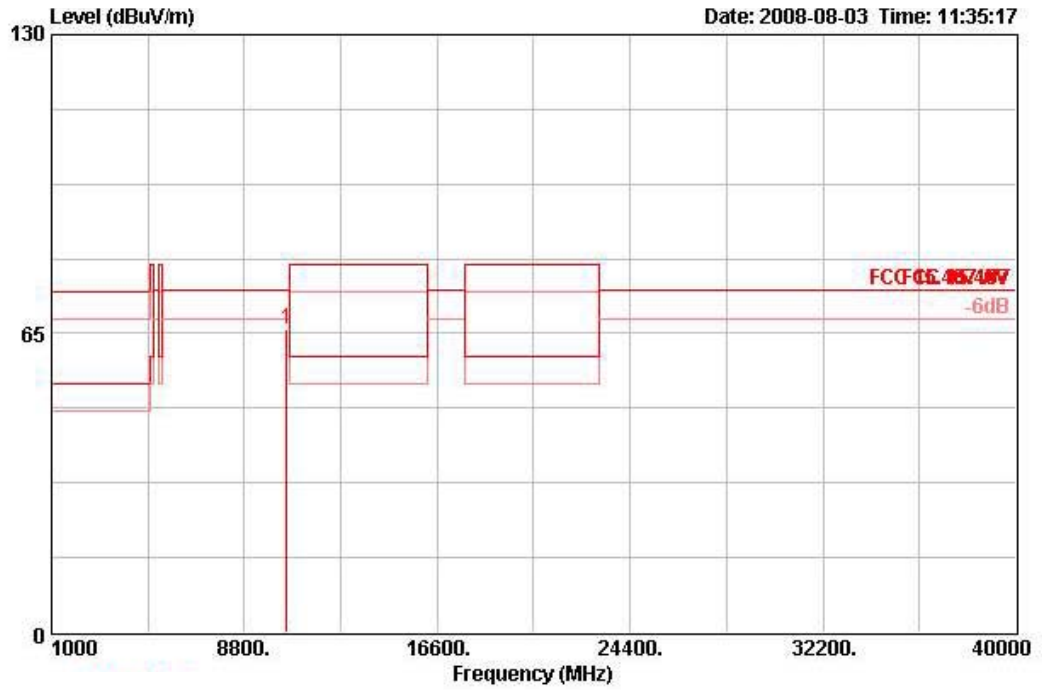


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10526.300	65.79	-8.51	74.30	55.81	38.39	6.50	34.92	PEAK	100	175	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 60 / Ant. 2

Horizontal

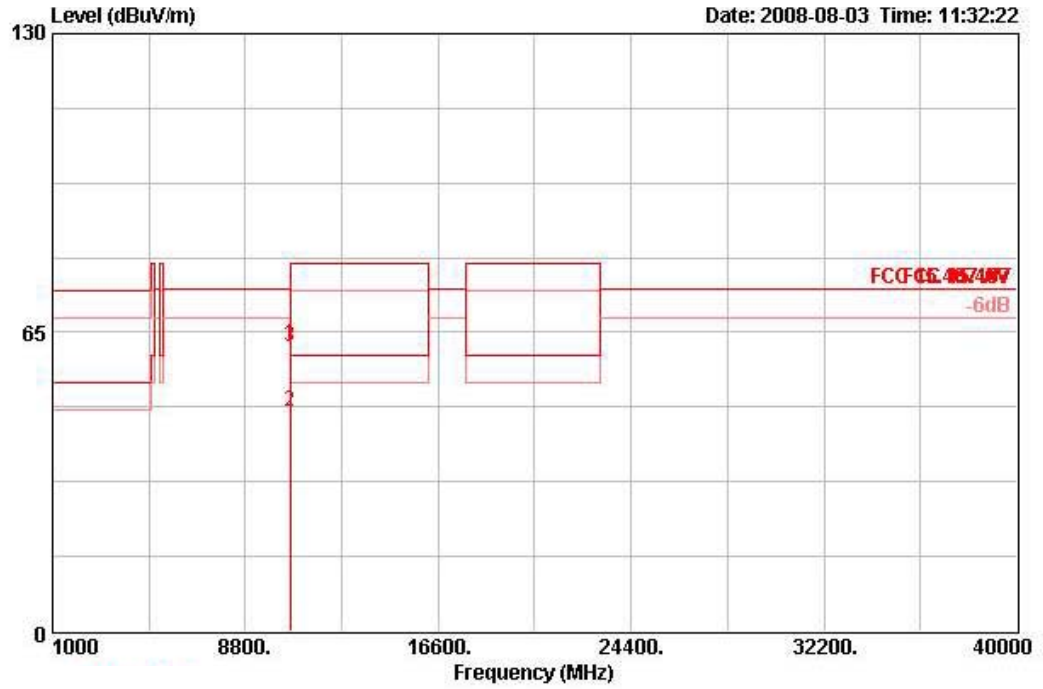

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10597.600	62.18	-12.12	74.30	52.19	38.38	6.51	34.90	PEAK	116	220	HORIZONTAL
2	10602.100	47.74	-12.26	60.00	37.73	38.38	6.52	34.89	AVERAGE	116	220	HORIZONTAL
3	10606.900	61.80	-18.20	80.00	51.79	38.38	6.52	34.89	PEAK	116	220	HORIZONTAL

Vertical

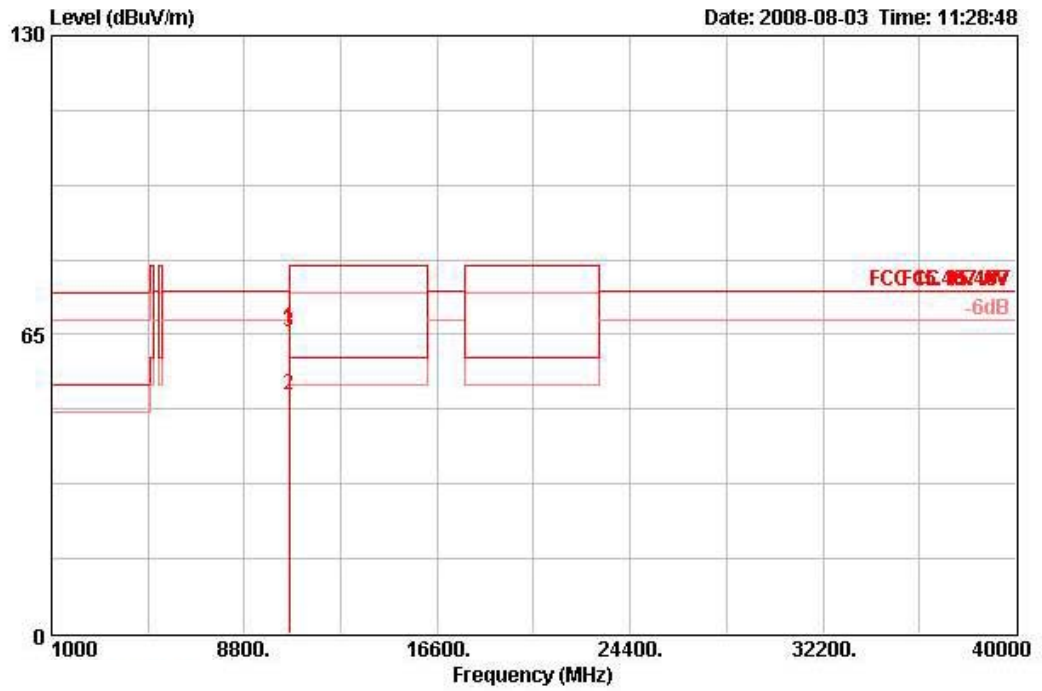


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10598.000	66.39	-7.91	74.30	56.40	38.38	6.51	34.90	PEAK	100	176	VERTICAL
2	10601.900	52.03	-7.97	60.00	42.02	38.38	6.52	34.89	AVERAGE	100	176	VERTICAL
3	10607.300	65.48	-14.52	80.00	55.47	38.38	6.52	34.89	PEAK	100	176	VERTICAL






Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 64 / Ant. 2

Horizontal

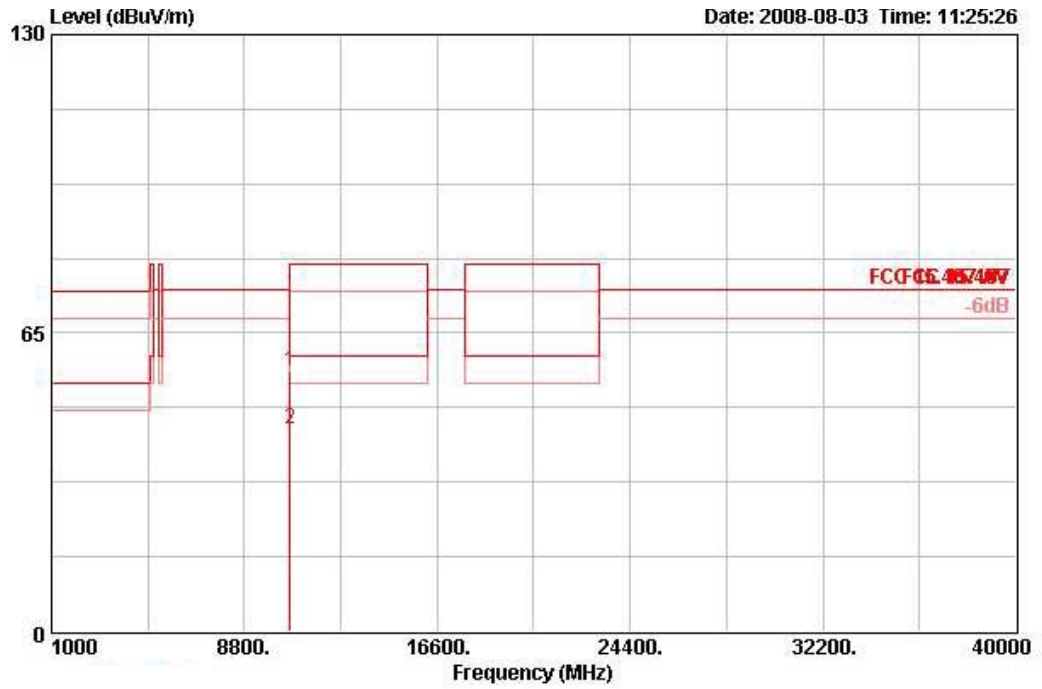

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10641.300	56.79	-23.21	80.00	46.77	38.37	6.53	34.88	PEAK	114	200	HORIZONTAL
2	10641.800	43.97	-16.03	60.00	33.96	38.37	6.53	34.88	AVERAGE	114	200	HORIZONTAL


**Vertical**

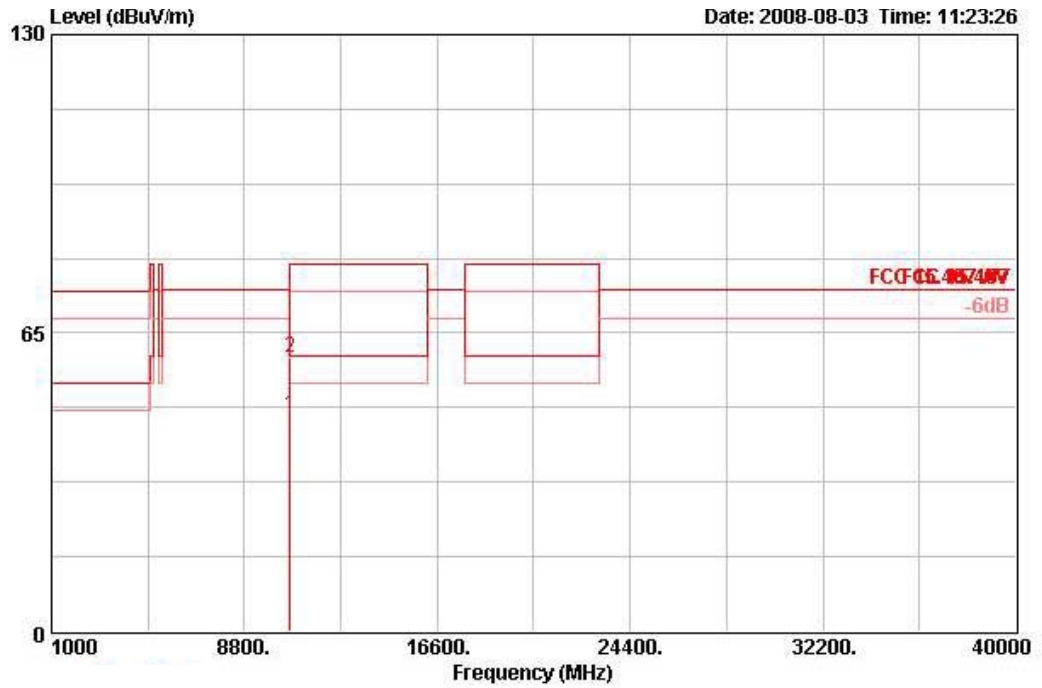

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10641.000	47.14	-12.86	60.00	37.12	38.37	6.53	34.88	AVERAGE	100	174	VERTICAL
2	10641.300	59.68	-20.32	80.00	49.66	38.37	6.53	34.88	PEAK	100	174	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 100 / Ant. 2

**Horizontal**

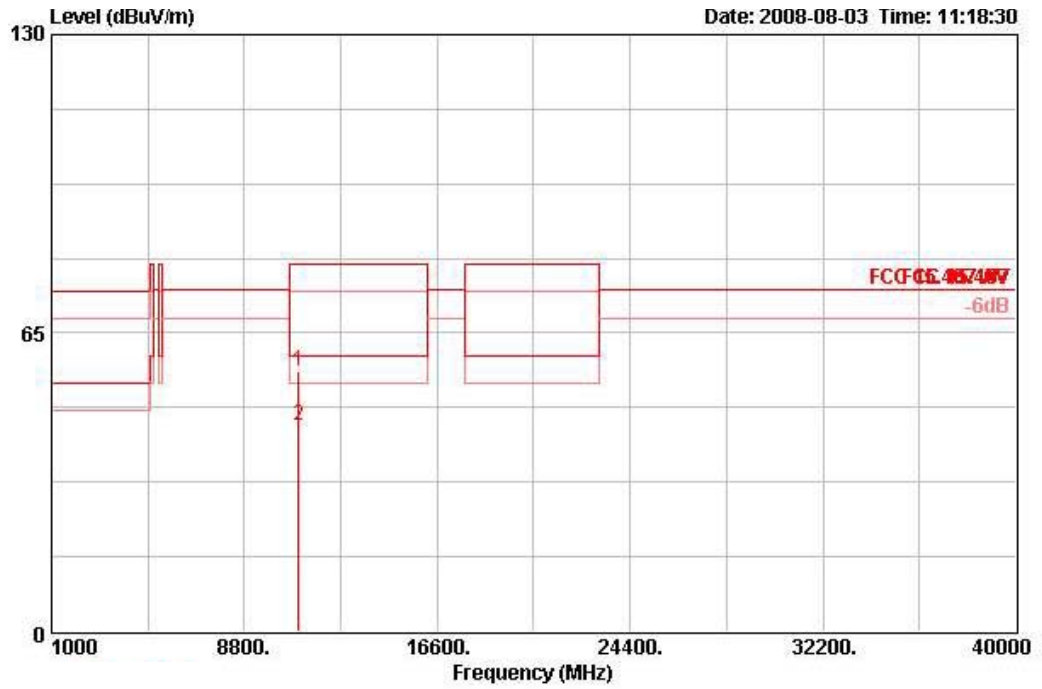

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.600	56.66	-23.34	80.00	46.47	38.32	6.63	34.76	PEAK	114	197	HORIZONTAL
2	11000.400	44.66	-15.34	60.00	34.47	38.32	6.63	34.76	AVERAGE	114	197	HORIZONTAL

**Vertical**

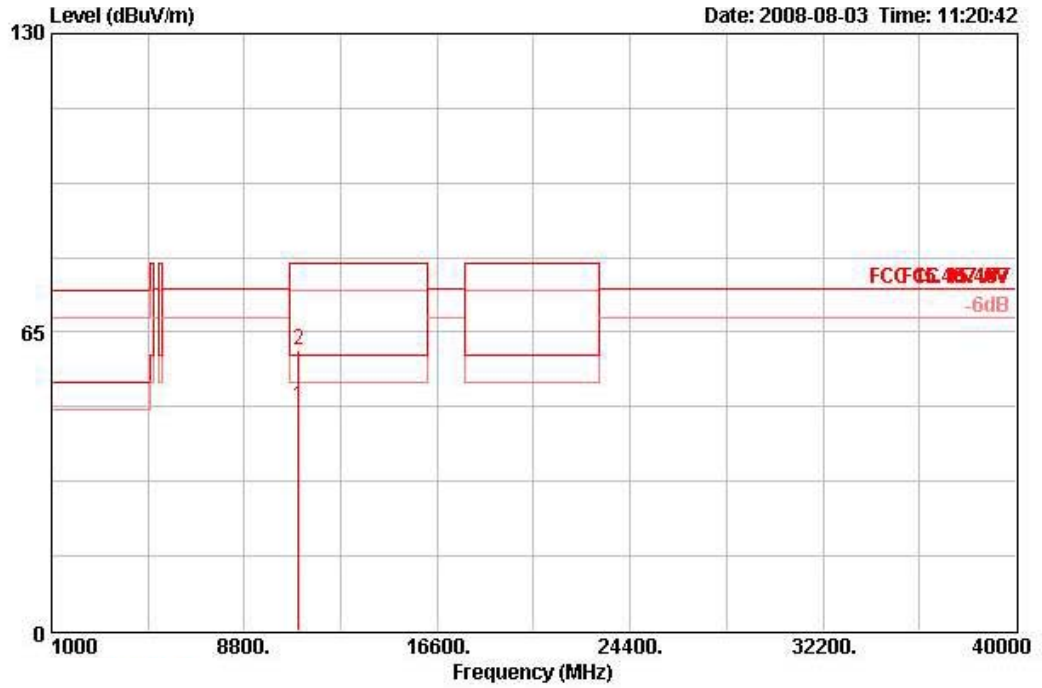


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11000.100	48.80	-11.20	60.00	38.62	38.30	6.63	34.76	AVERAGE	100	176	VERTICAL
2	11000.600	61.22	-18.78	80.00	51.05	38.30	6.63	34.76	PEAK	100	176	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 116 / Ant. 2

Horizontal

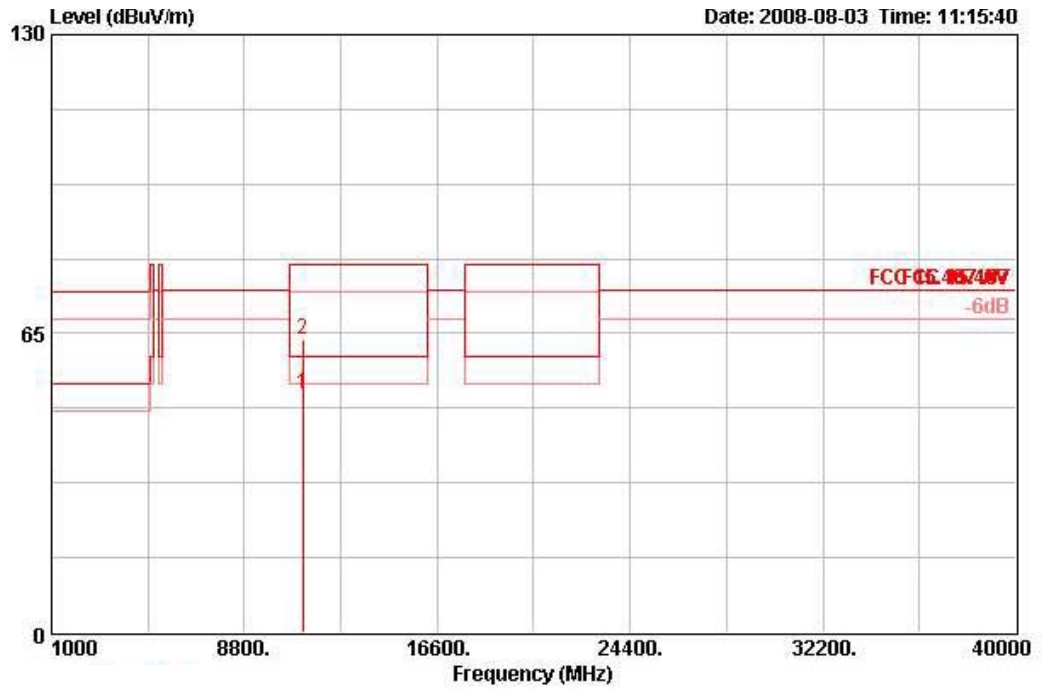

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11157.300	51.75	-8.25	60.00	41.48	38.45	6.65	34.83	AVERAGE	114	205	HORIZONTAL
2	11157.600	63.76	-16.24	80.00	53.50	38.45	6.65	34.83	PEAK	114	205	HORIZONTAL


**Vertical**

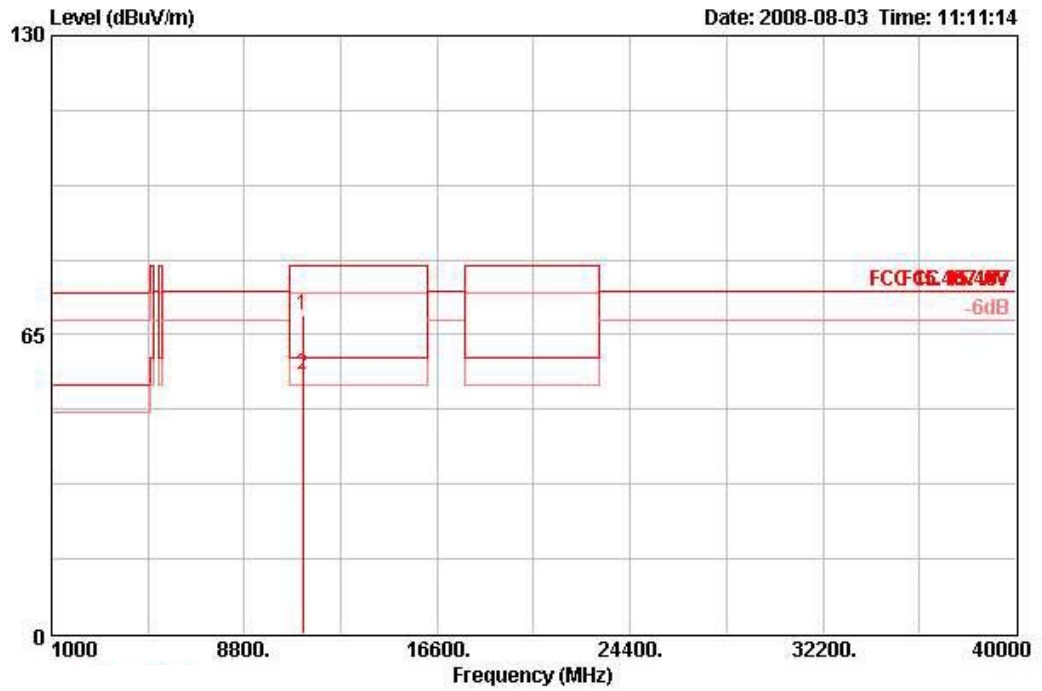

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11157.100	69.19	-10.81	80.00	58.92	38.45	6.65	34.83	PEAK	100	178	VERTICAL
2	11158.200	56.27	-3.73	60.00	46.00	38.45	6.65	34.83	AVERAGE	100	178	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Johnson Chang	<b>Configurations</b>	802.11a Ch 140 / Ant. 2

**Horizontal**

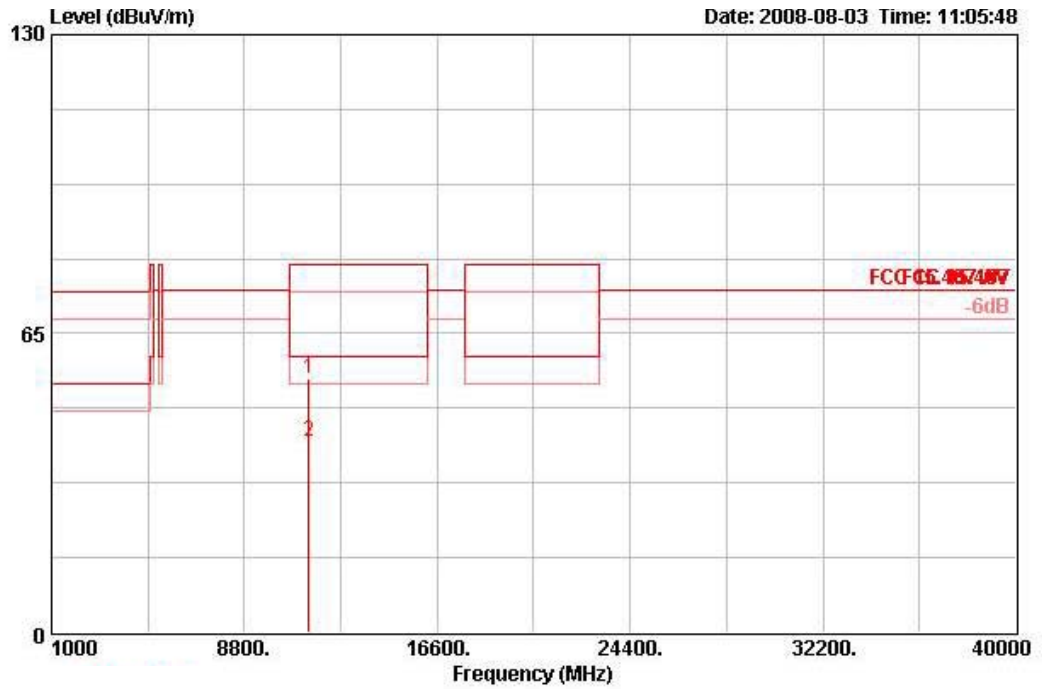

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11402.240	55.28	-24.72	80.00	44.86	38.70	6.67	34.95	PEAK	106	220	HORIZONTAL
2	11402.960	41.40	-18.60	60.00	30.98	38.70	6.67	34.95	AVERAGE	106	220	HORIZONTAL

**Vertical**

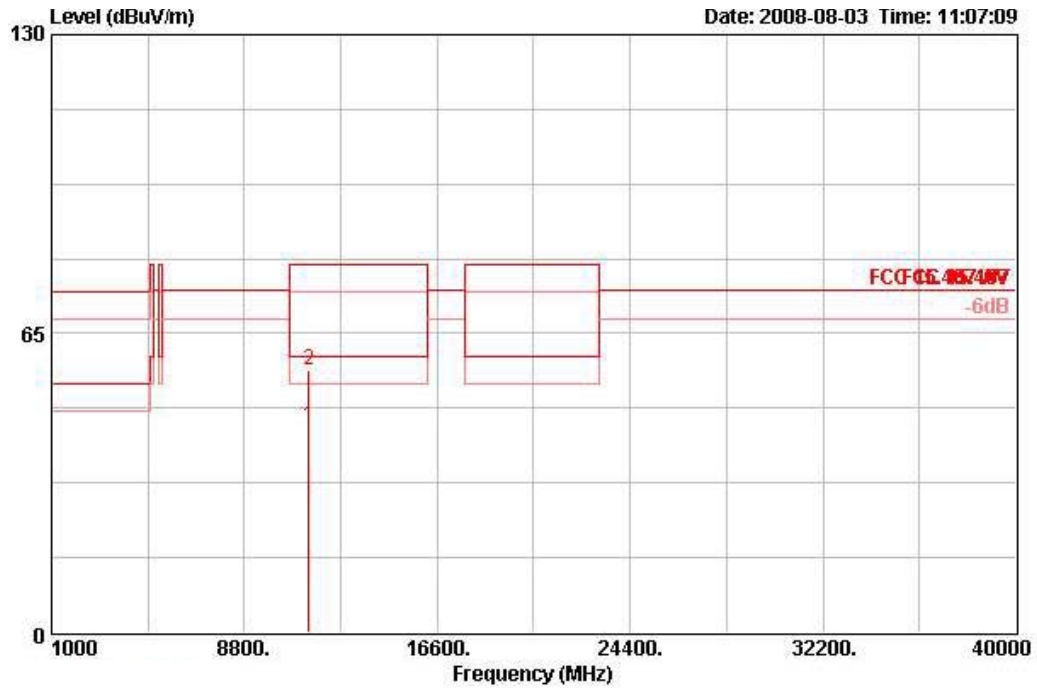

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11402.320	44.76	-15.24	60.00	34.34	38.70	6.67	34.95	AVERAGE	100	174	VERTICAL
2	11404.200	57.09	-22.91	80.00	46.67	38.70	6.67	34.95	PEAK	100	174	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);


Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].






Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 36 / Ant. 3

**Horizontal**

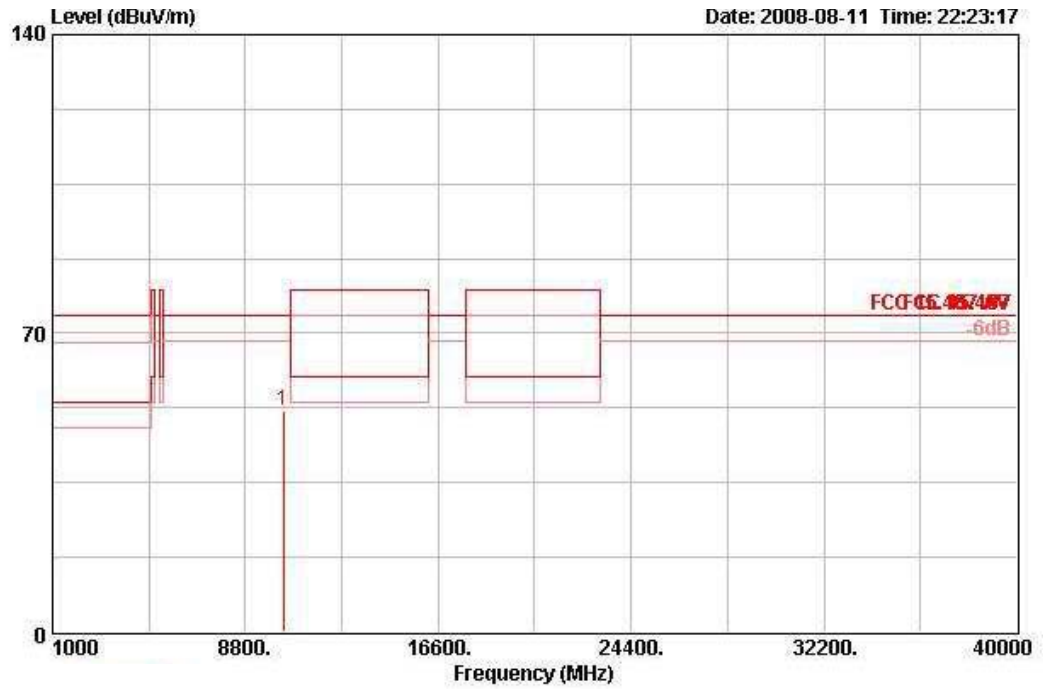

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10350.120	51.68	-22.62	74.30	42.09	38.37	6.34	35.12	PEAK	110	168	HORIZONTAL


**Vertical**

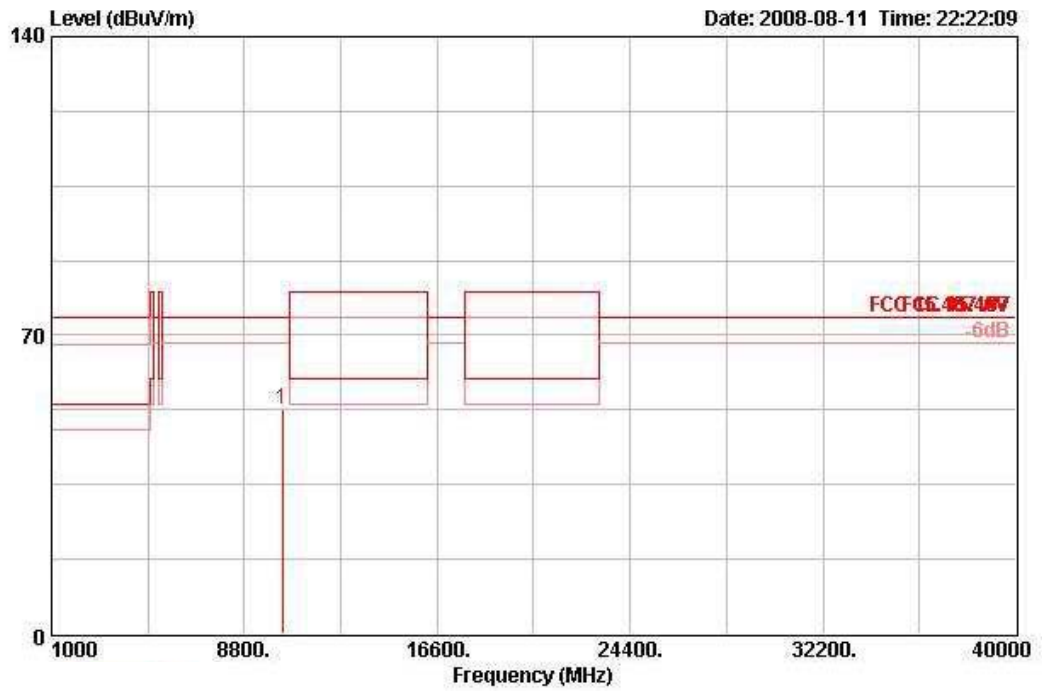

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10351.920	52.69	-21.61	74.30	43.09	38.37	6.34	35.12	PEAK	103	233	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 40 / Ant. 3

**Horizontal**

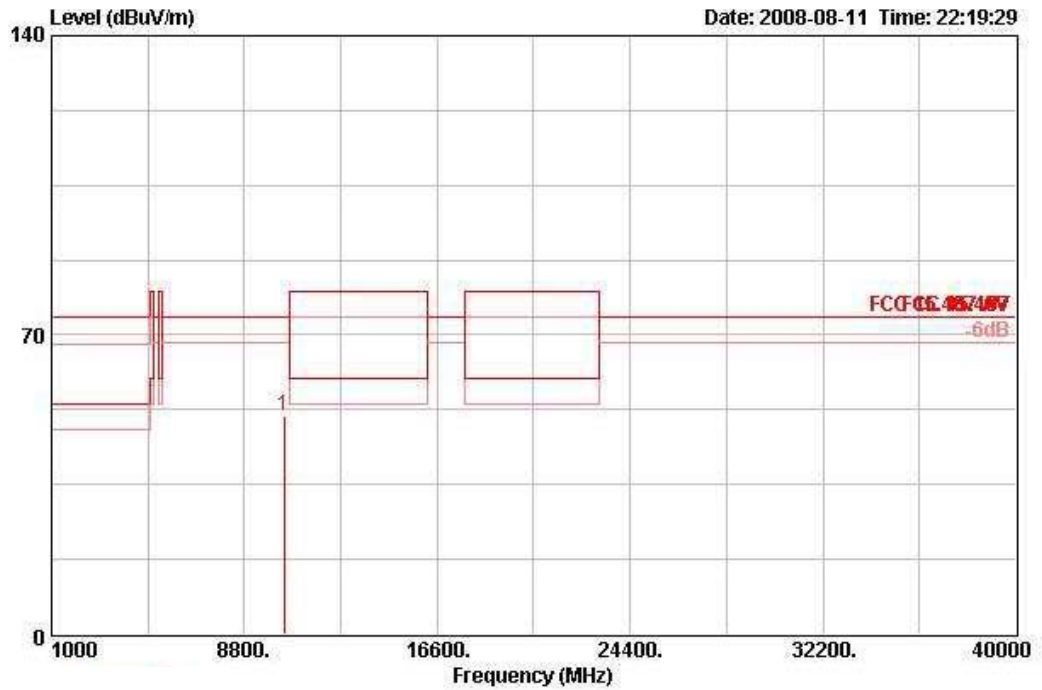

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10396.360	51.10	-23.20	74.30	41.44	38.38	6.37	35.09	PERK	100	305	HORIZONTAL


Vertical

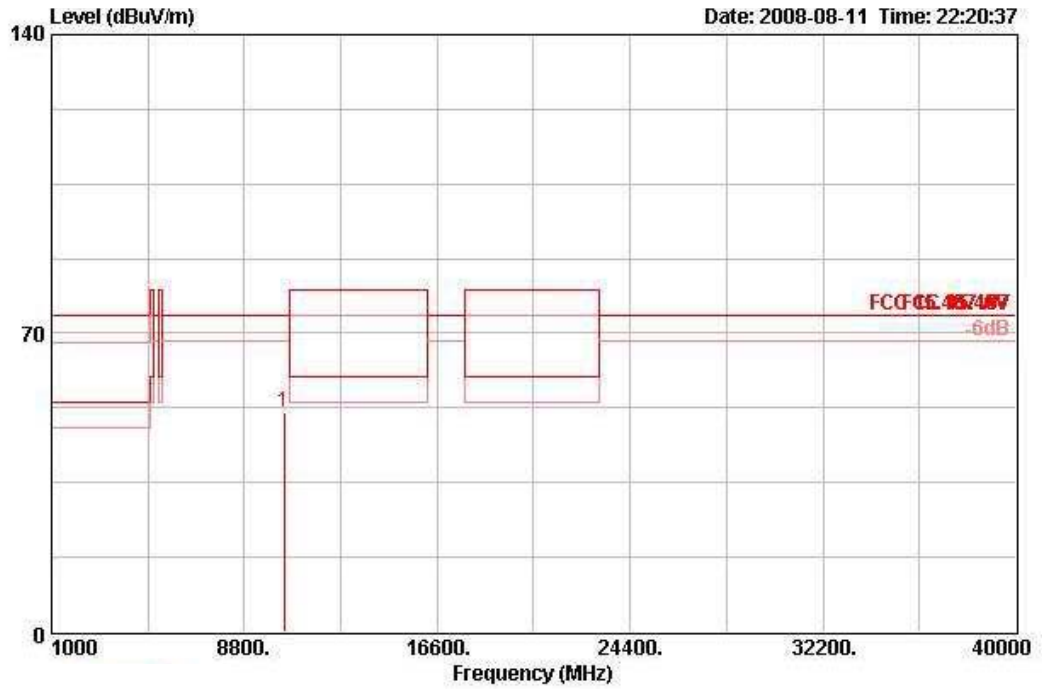

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10394.640	51.61	-22.69	74.30	41.95	38.38	6.37	35.09	PEAK	100	146	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 48 / Ant. 3

**Horizontal**

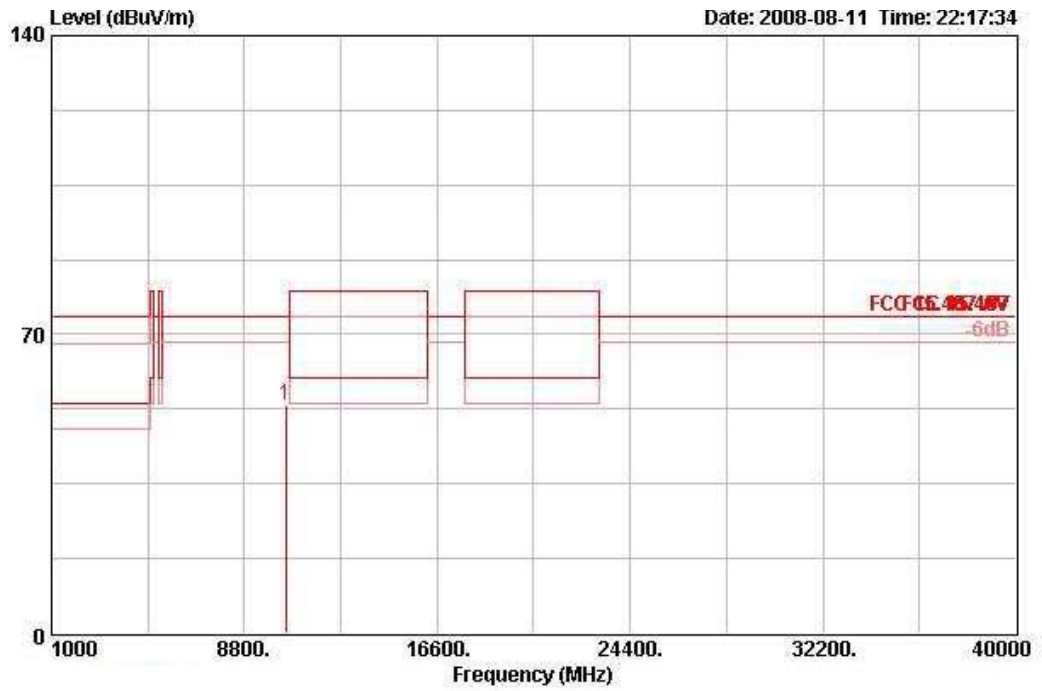

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10482.920	53.27	-21.03	74.30	43.37	38.39	6.46	34.96	PEAK	100	166	HORIZONTAL


Vertical

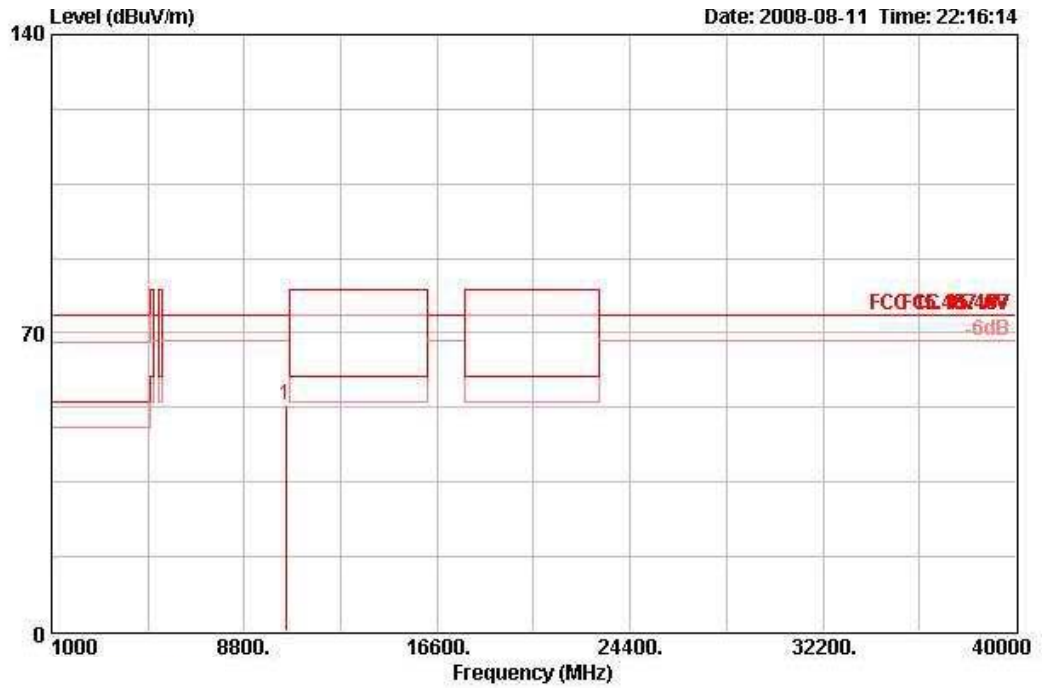

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10471.880	53.07	-21.23	74.30	43.23	38.39	6.44	34.99	PEAK	111	229	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 52 / Ant. 3

**Horizontal**

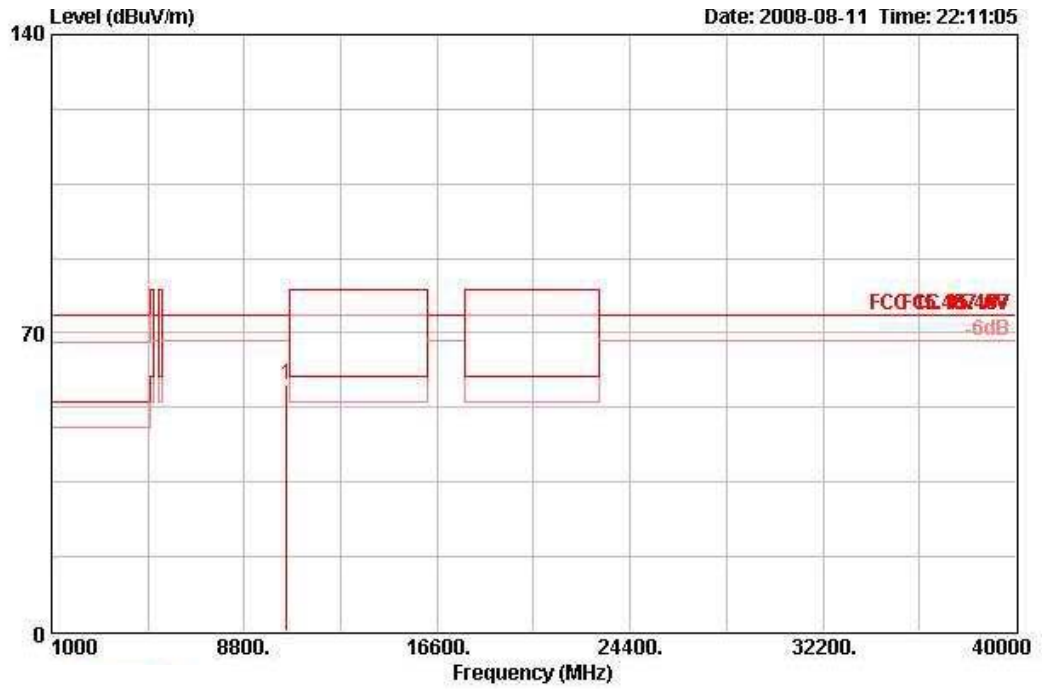

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	10514.880	57.65	-16.65	74.30	47.70	38.40	6.48	34.93	PERK	111	174	HORIZONTAL

Vertical

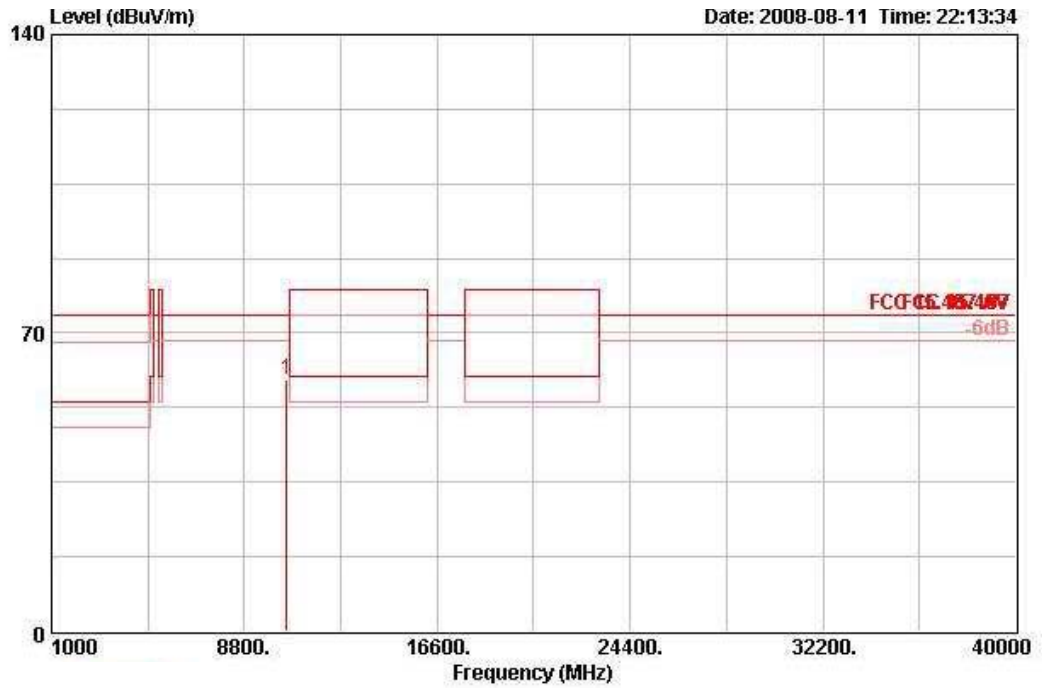


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10516.440	58.91	-15.39	74.30	48.96	38.39	6.48	34.93	PEAK	100	233	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 60 / Ant. 3

**Horizontal**

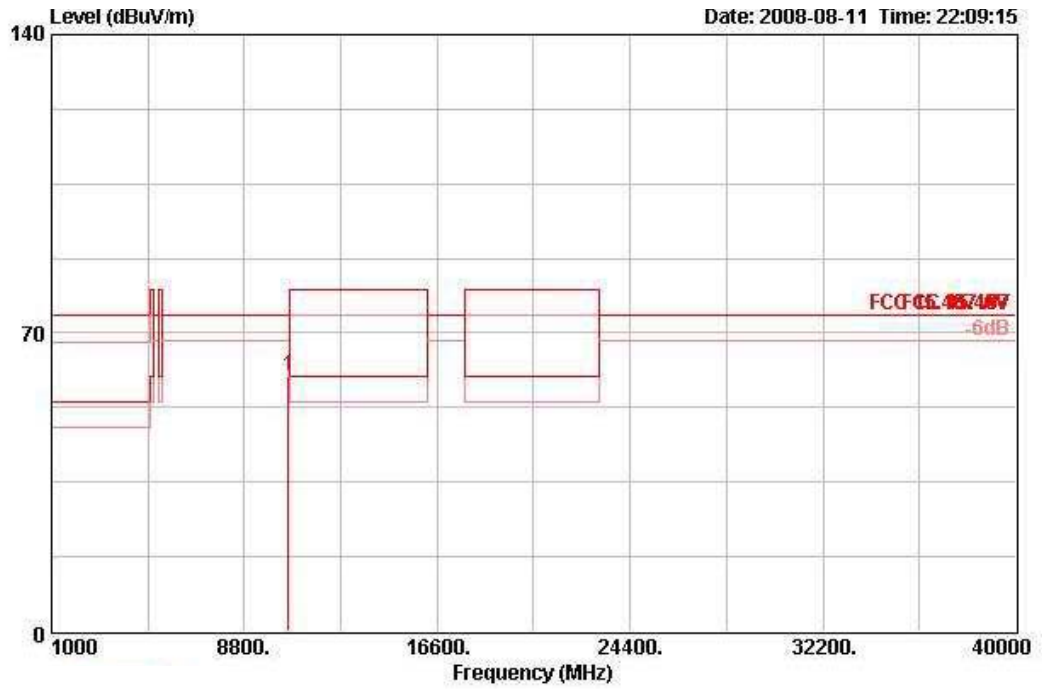

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	10595.000	59.72	-14.58	74.30	49.73	38.38	6.51	34.90	PERK	112	165	HORIZONTAL

Vertical

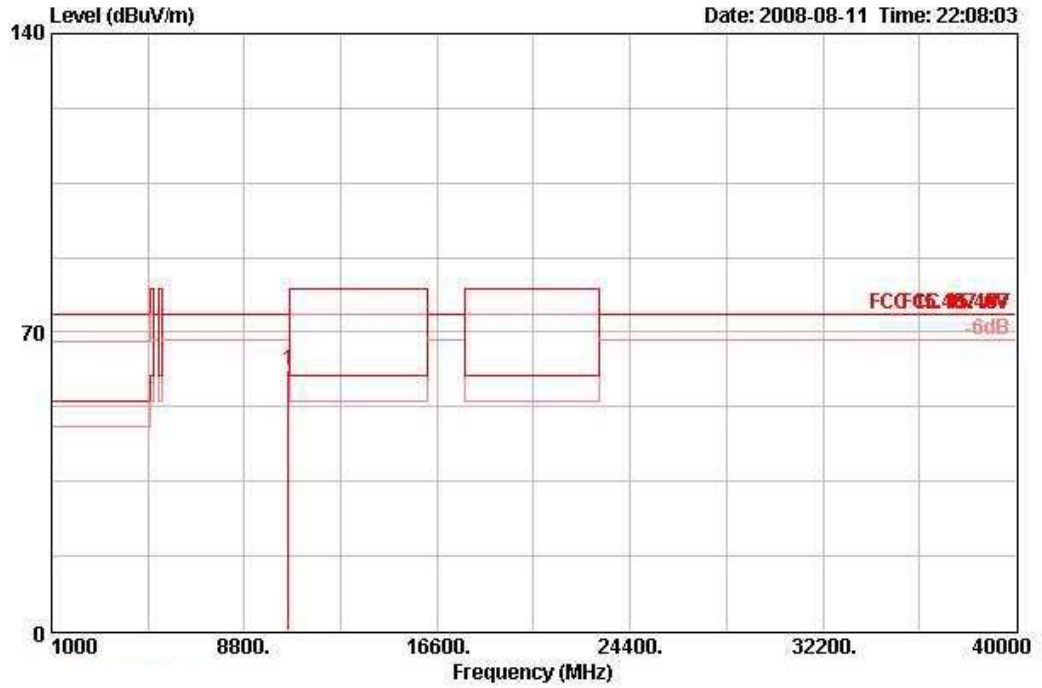


	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
Freq	Level	Limit	Level	Factor	Loss	Factor		Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		cm	deg
10593.400	60.84	-13.46	74.30	50.84	38.38	6.51	34.90 PEAK	100	225 VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 64 / Ant. 3

Horizontal

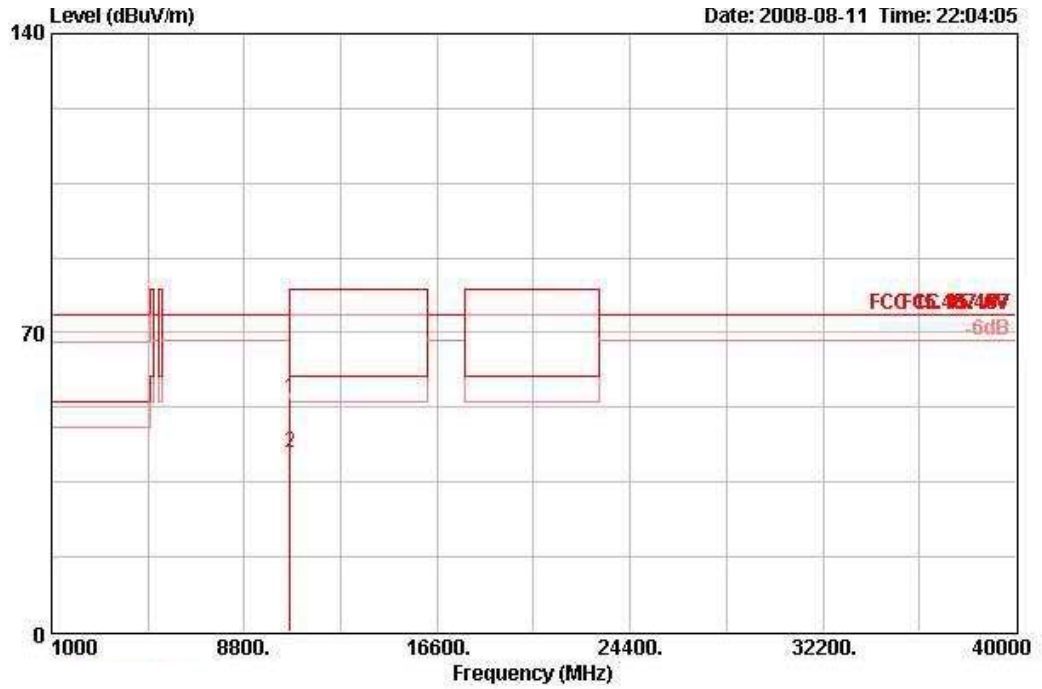

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10641.880	54.68	-25.32	80.00	44.67	38.37	6.53	34.88	PEAK	110	169	HORIZONTAL
2	10642.640	41.98	-18.02	60.00	31.96	38.37	6.53	34.88	AVERAGE	110	169	HORIZONTAL

**Vertical**

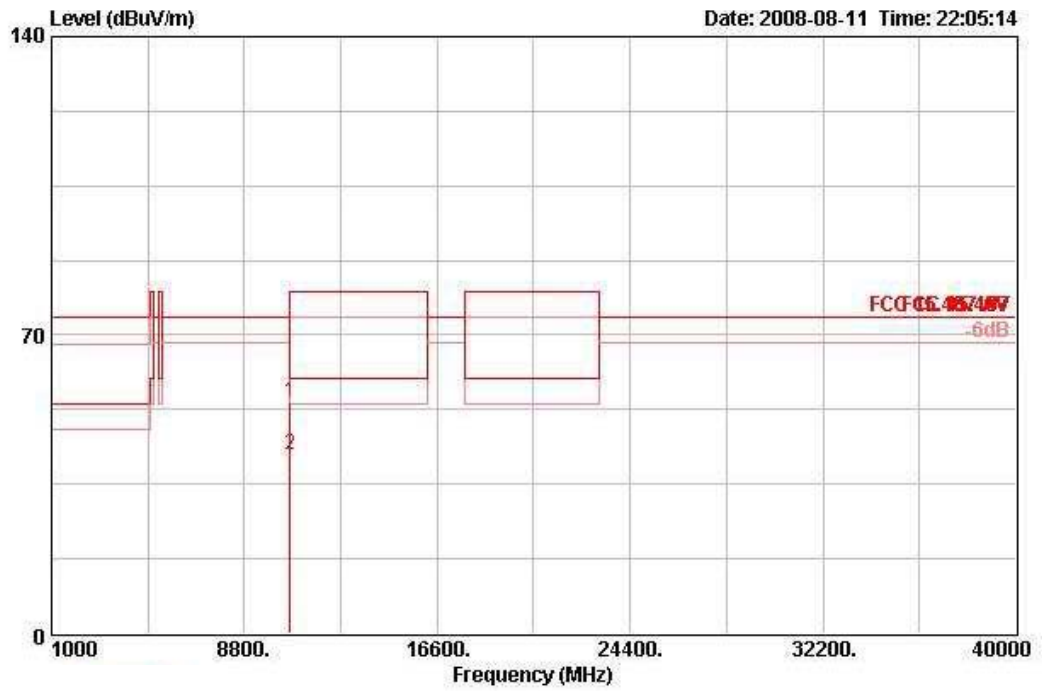

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor		Pos	Pos Pol/Phase
					dBuV	dB/m	dB	dB		cm	deg
1	10634.800	54.44	-25.56	80.00	44.42	38.37	6.53	34.88	PEAK	100	194 VERTICAL
2	10642.680	41.94	-18.06	60.00	31.93	38.37	6.53	34.88	AVERAGE	100	194 VERTICAL