





Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 100 / Ant. 3

Horizontal

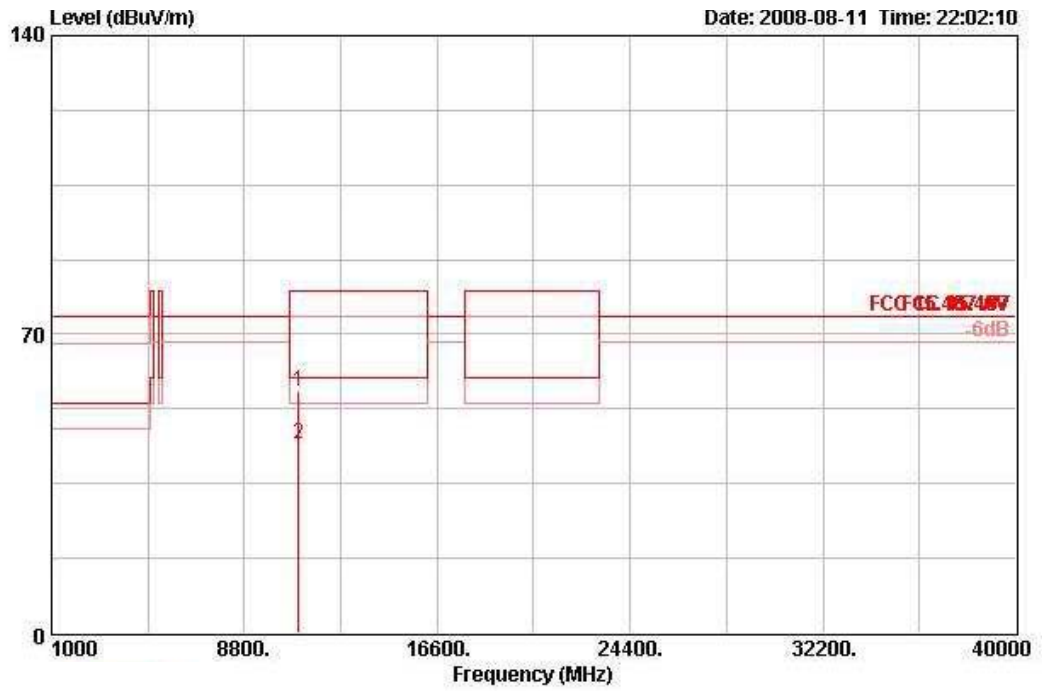

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.360	56.48	-23.52	80.00	46.29	38.32	6.63	34.76	PEAK	112	161	HORIZONTAL
2	10999.480	44.08	-15.92	60.00	33.89	38.32	6.63	34.76	AVERAGE	112	161	HORIZONTAL


Vertical

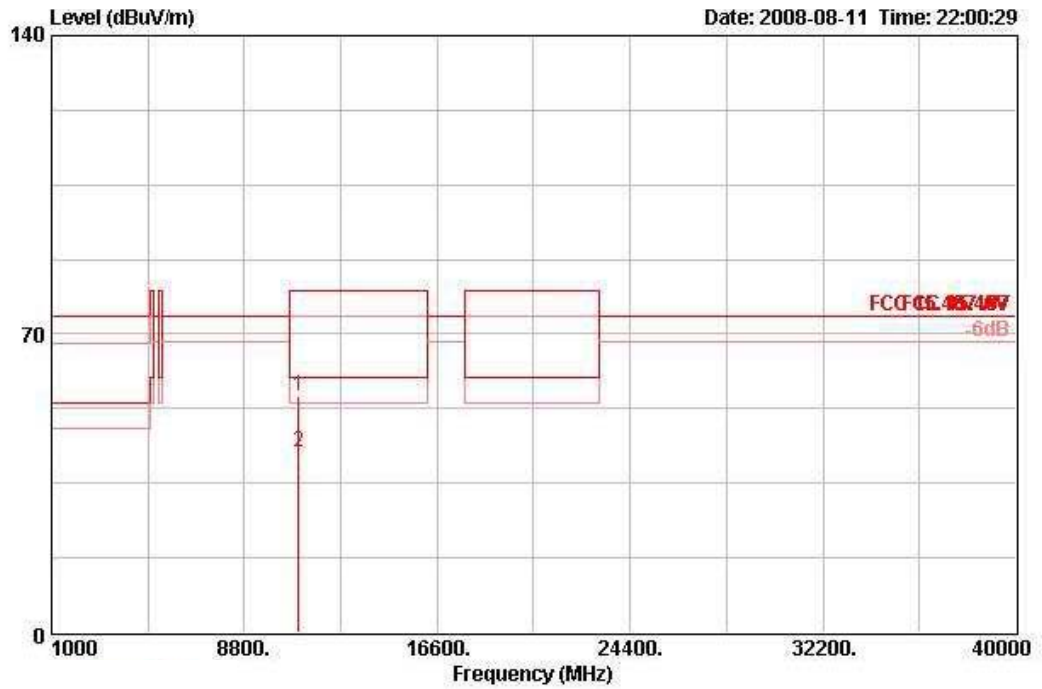

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	Pos	Pos	Pol/Phase
1	10999.040	55.32	-24.68	80.00	45.14	38.30	6.63	34.76	100	189	VERTICAL
2	11000.160	42.45	-17.55	60.00	32.28	38.30	6.63	34.76	100	189	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 116 / Ant. 3

Horizontal

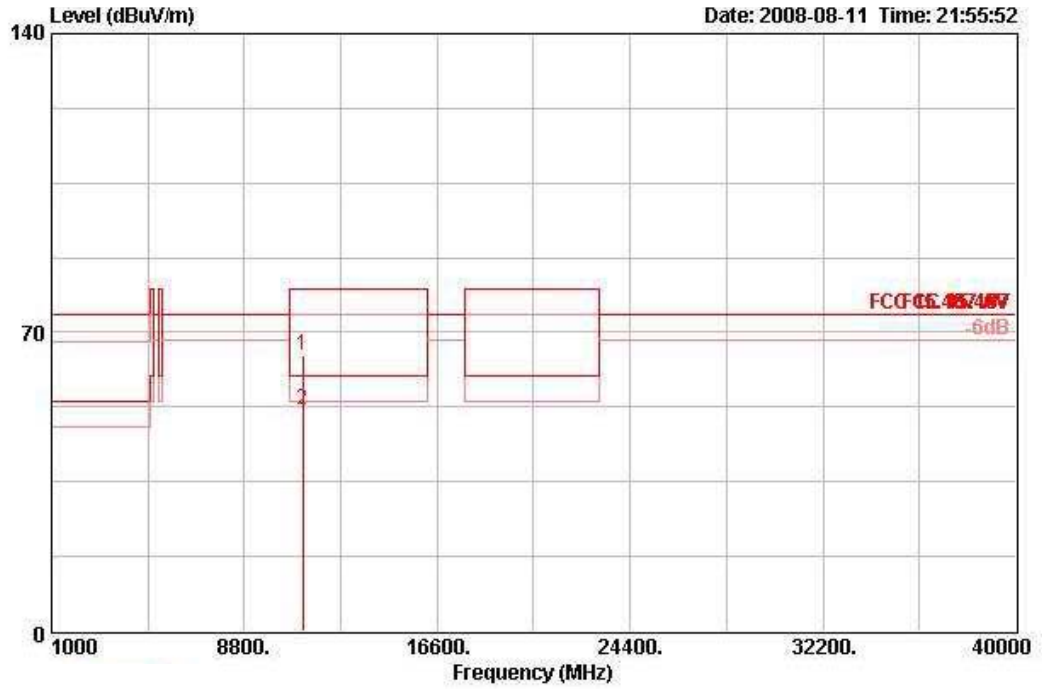

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11153.000	64.51	-15.49	80.00	54.25	38.45	6.65	34.83	PEAK	106	159	HORIZONTAL
2	11155.800	51.90	-8.10	60.00	41.63	38.45	6.65	34.83	AVERAGE	106	159	HORIZONTAL


Vertical

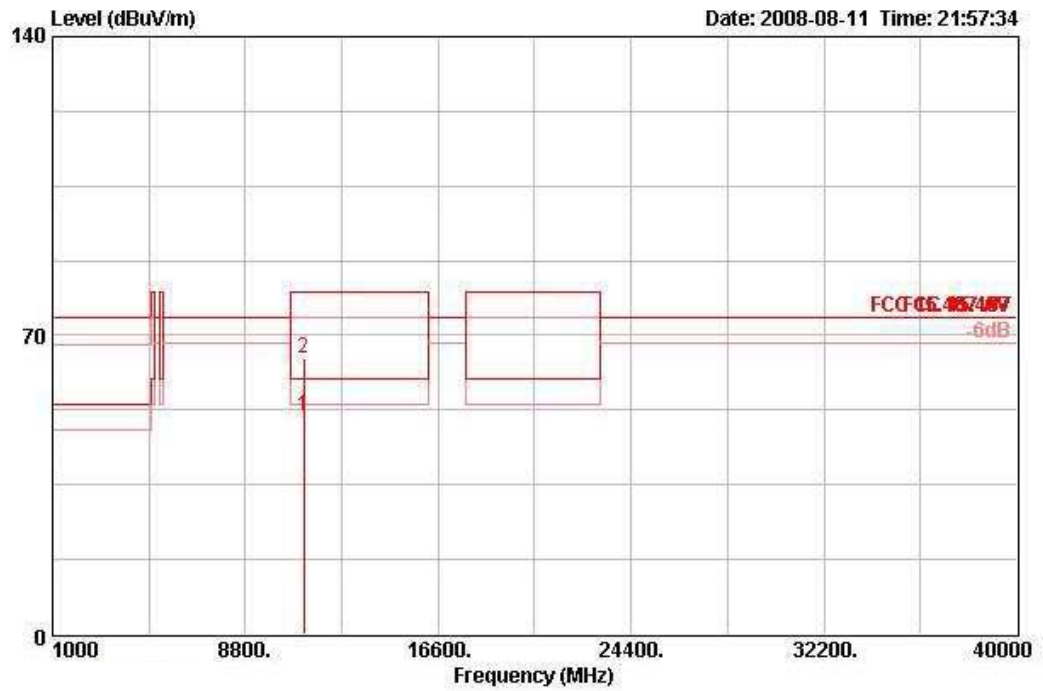

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11154.960	51.15	-8.85	60.00	40.88	38.45	6.65	34.83	AVERAGE	100	224	VERTICAL
2	11155.160	64.44	-15.56	80.00	54.17	38.45	6.65	34.83	PEAK	100	224	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 140 / Ant. 3

Horizontal

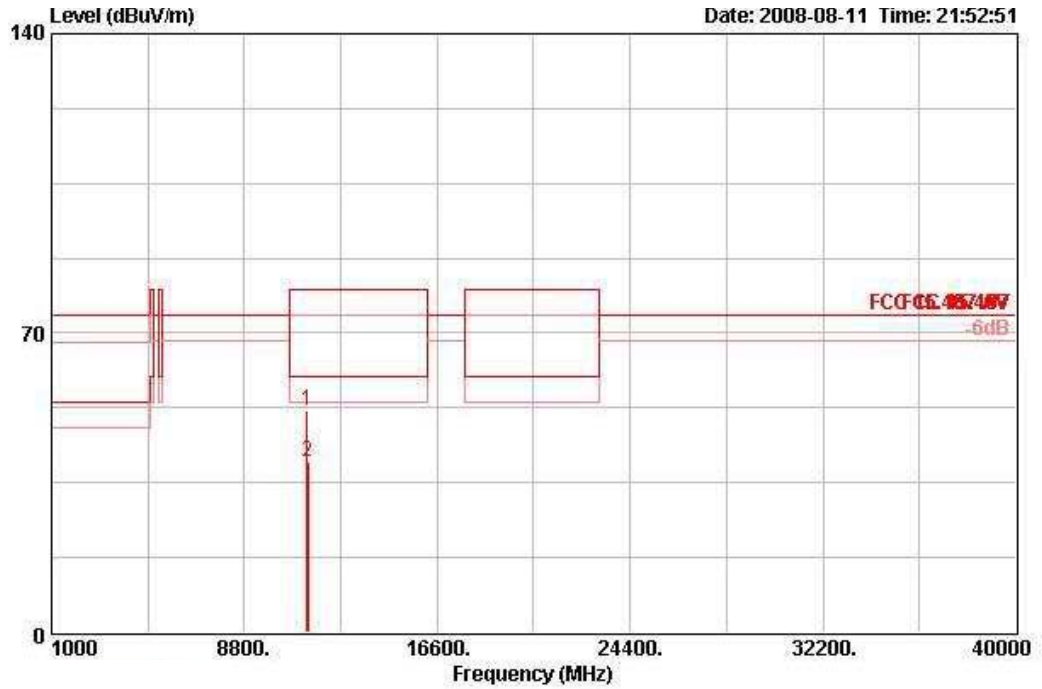

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11350.400	52.01	-27.99	80.00	41.62	38.65	6.67	34.92	PEAK	100	118	HORIZONTAL
2	11352.800	39.96	-20.04	60.00	29.57	38.65	6.67	34.92	AVERAGE	100	118	HORIZONTAL


Vertical

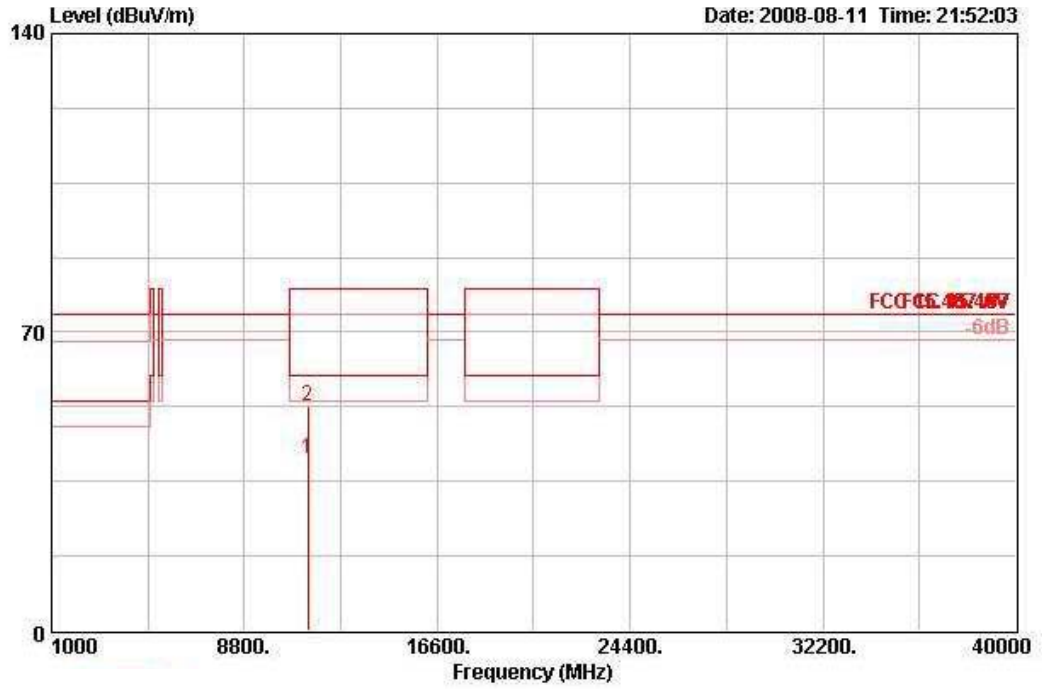

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	11354.200	40.22	-19.78	60.00	29.82	38.65	6.67	34.92	AVERAGE	100	360
2	11386.200	52.63	-27.37	80.00	42.21	38.68	6.67	34.94	PEAK	100	360


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 38 / Ant. 3

Horizontal

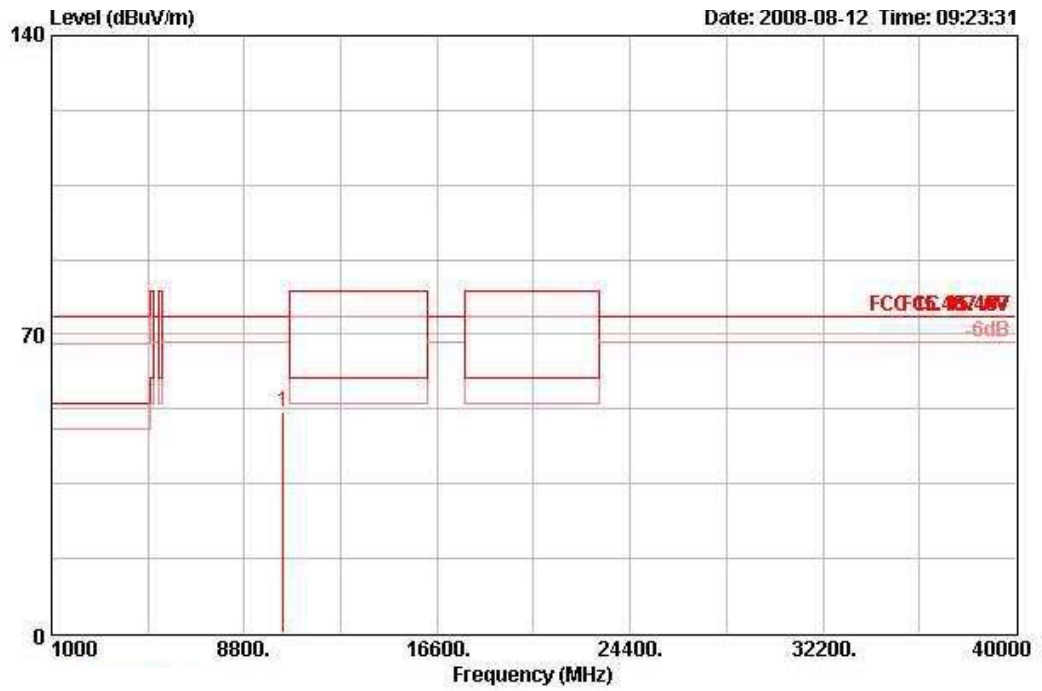

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10379.740	51.85	-22.45	74.30	42.20	38.38	6.37	35.09	PEAK	100	113	HORIZONTAL

Vertical

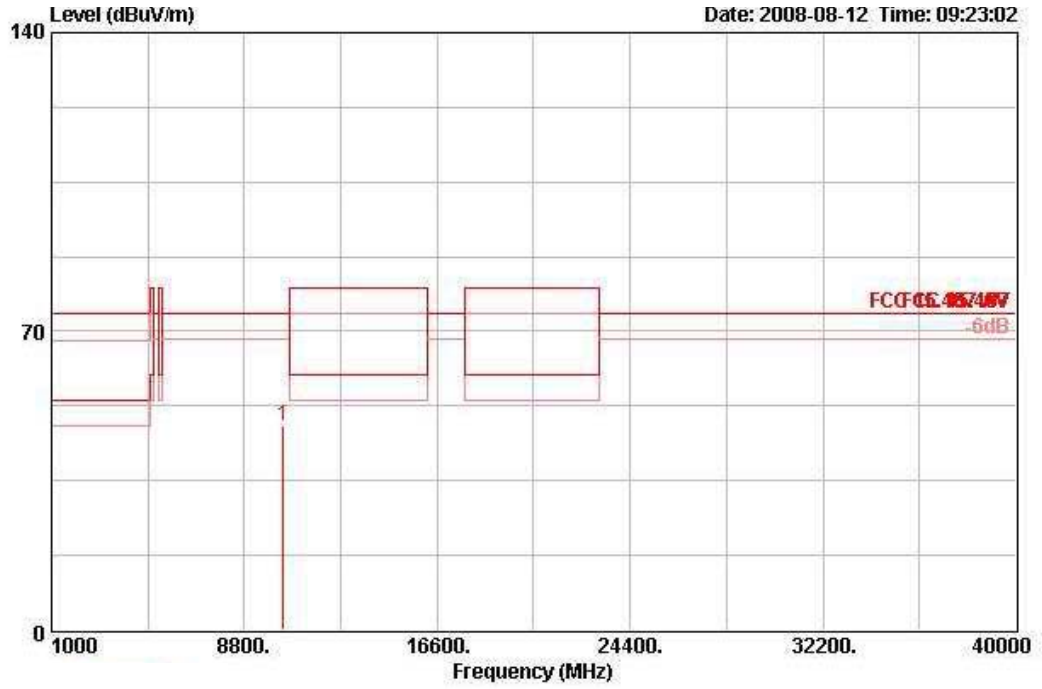


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10379.920	47.94	-26.36	74.30	38.28	38.38	6.37	35.09	PEAK	100	70	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 46 / Ant. 3

Horizontal

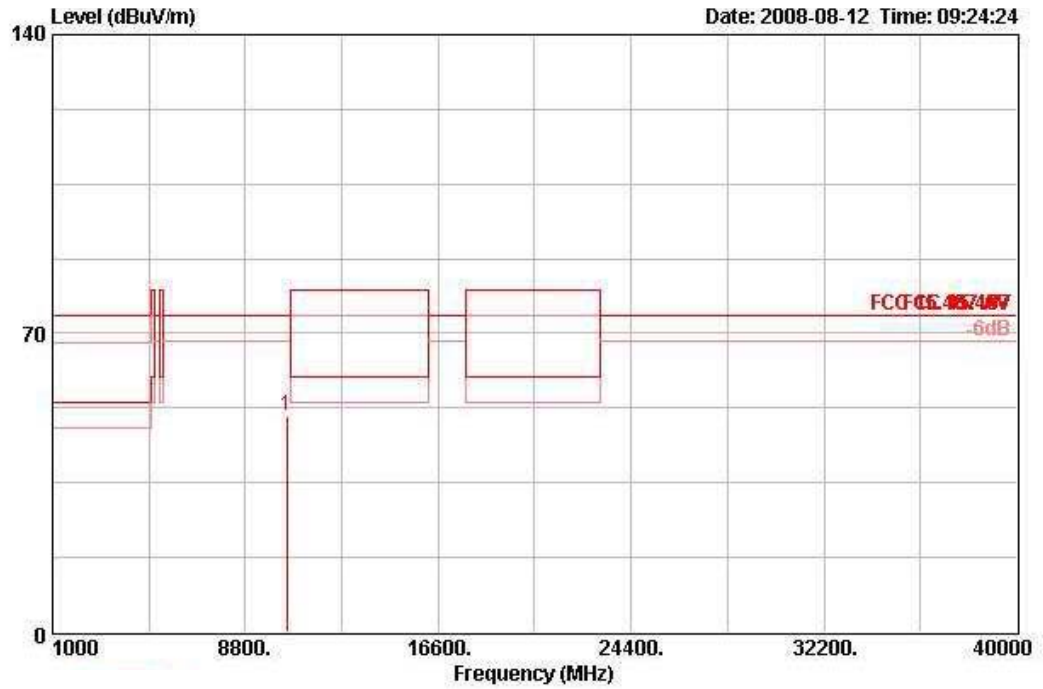

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10460.240	50.83	-23.47	74.30	40.99	38.39	6.44	34.99	PEAK	100	196	HORIZONTAL

Vertical

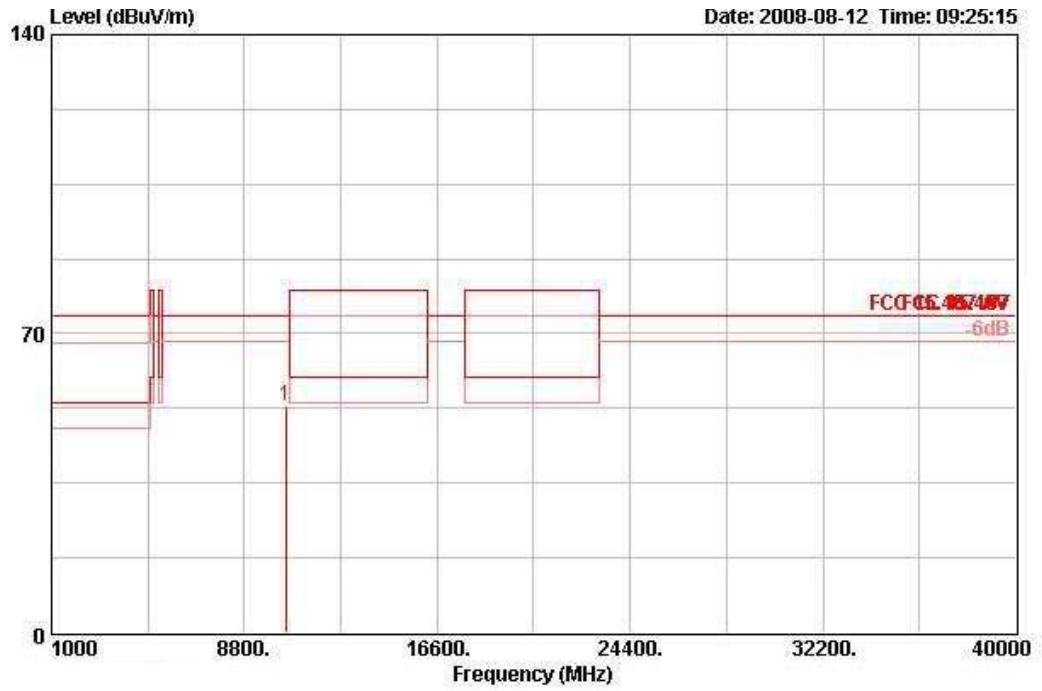


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10459.940	52.86	-21.44	74.30	43.01	38.39	6.44	34.99	PEAK	100	208	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 54 / Ant. 3

Horizontal

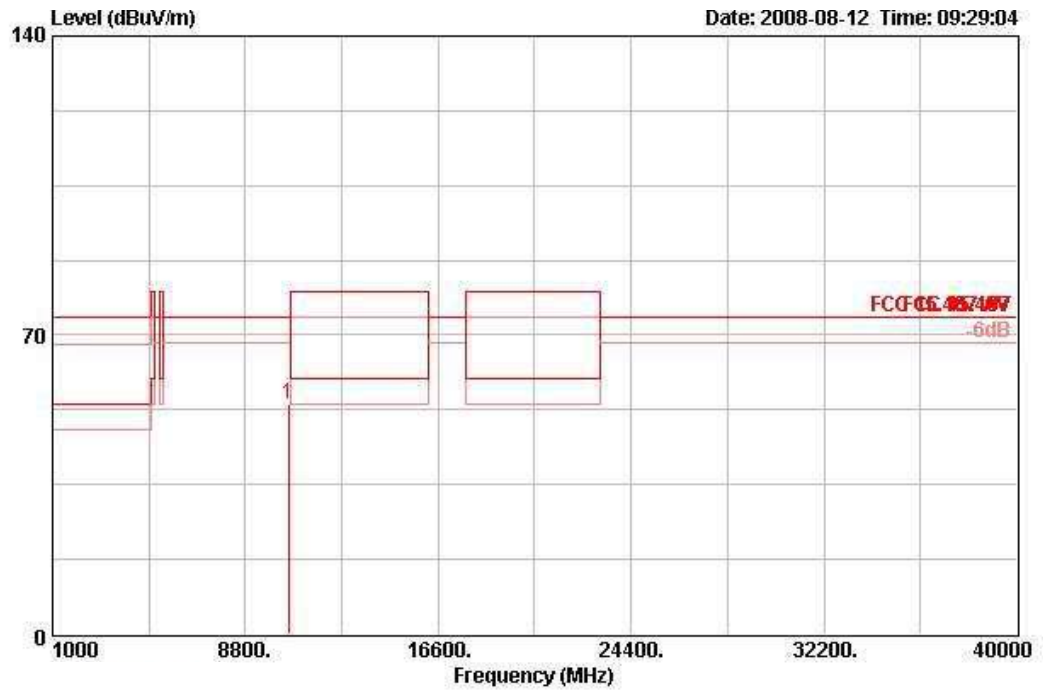

	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
1	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos Pol/Phase
	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg
1	-20.60	74.30	43.72	38.39	6.50	34.92	104	333 HORIZONTAL


Vertical

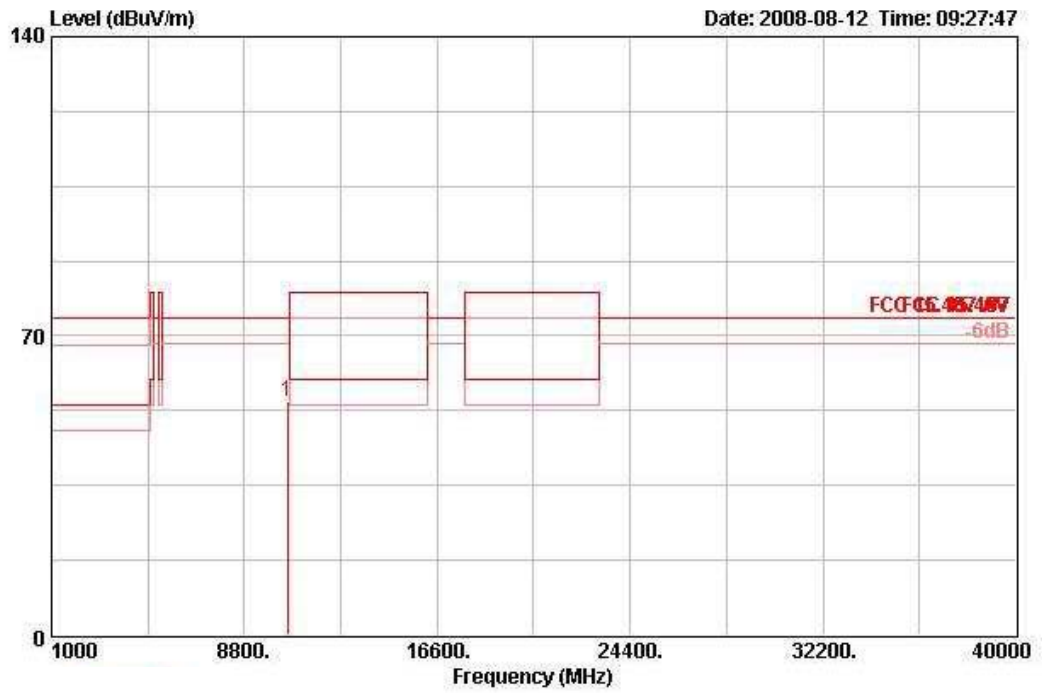

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10535.910	54.79	-19.51	74.30	44.82	38.39	6.50	34.92	PEAK	100	226	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 62 / Ant. 3

Horizontal

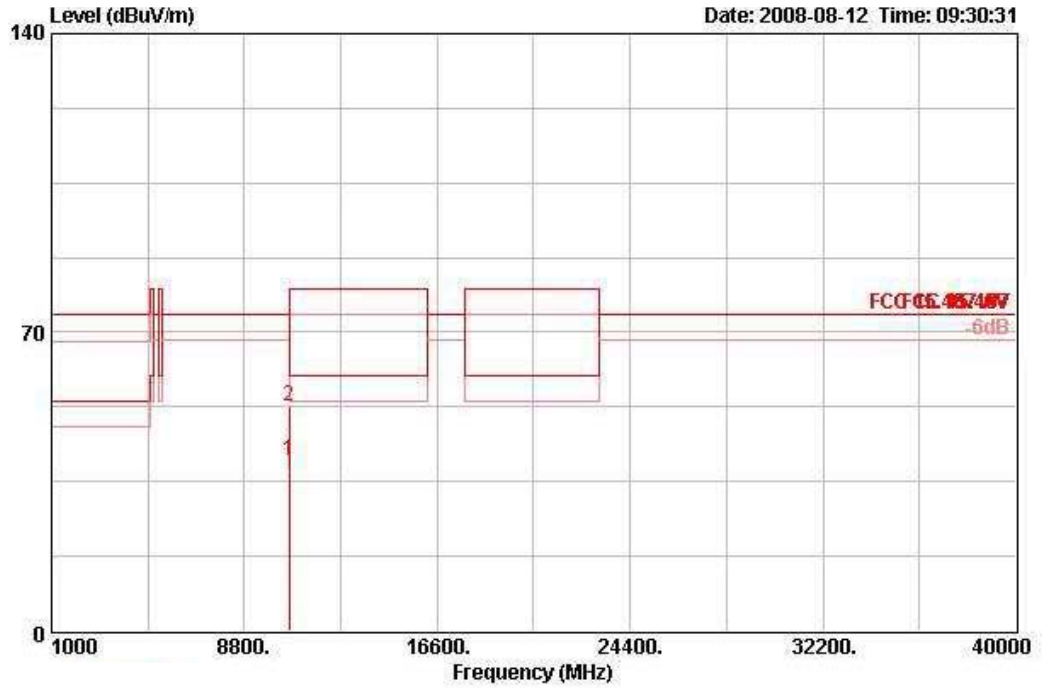

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10618.040	39.99	-20.01	60.00	29.99	38.38	6.52	34.89	AVERAGE	100	0	HORIZONTAL
2	10618.920	52.51	-27.49	80.00	42.51	38.38	6.52	34.89	PEAK	100	0	HORIZONTAL


Vertical

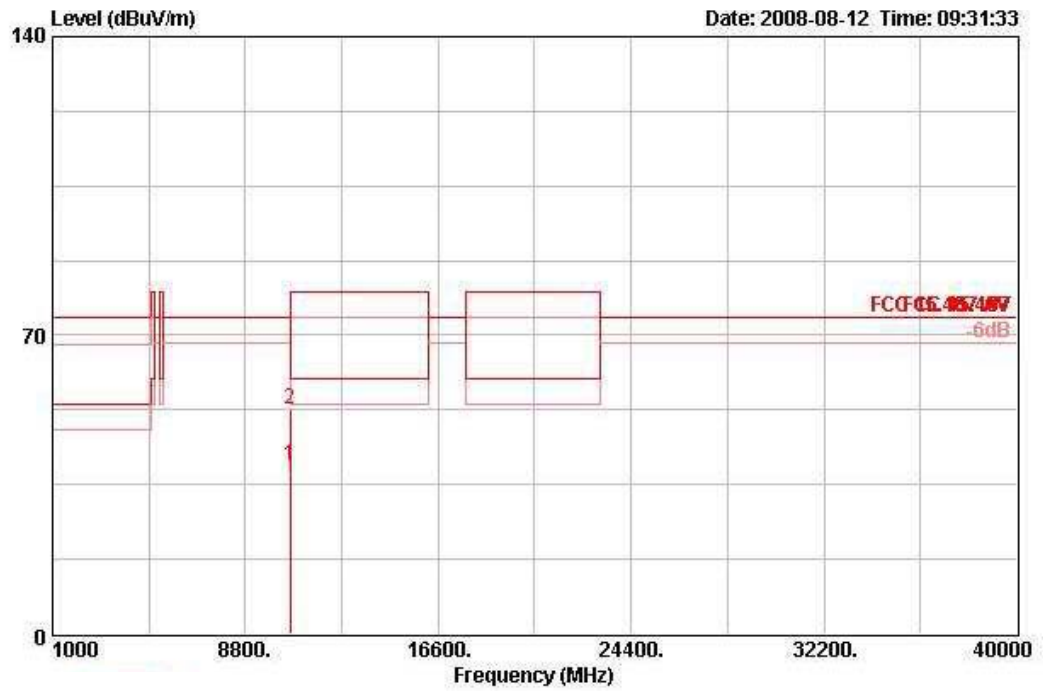

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10617.800	39.64	-20.36	60.00	29.63	38.38	6.52	34.89	AVERAGE	100	208	VERTICAL
2	10621.410	52.64	-27.36	80.00	42.64	38.38	6.52	34.89	PEAK	100	208	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 102 / Ant. 3

Horizontal

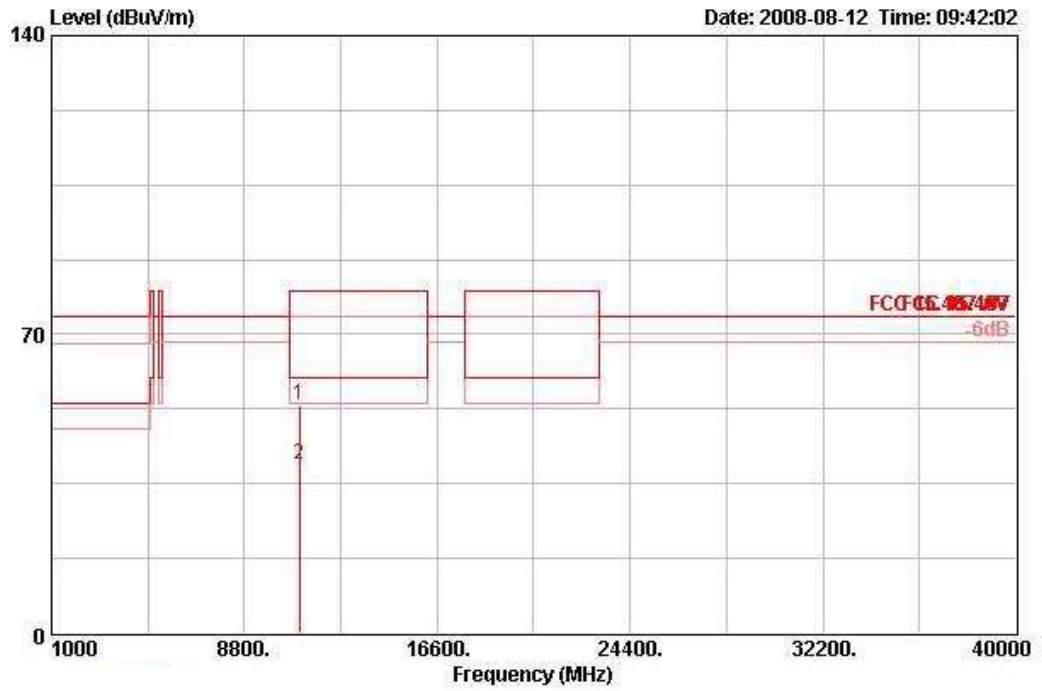

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11020.520	53.62	-26.38	80.00	43.42	38.33	6.63	34.77	PEAK	103	175	HORIZONTAL
2	11020.600	39.39	-20.61	60.00	29.19	38.33	6.63	34.77	AVERAGE	103	175	HORIZONTAL


Vertical

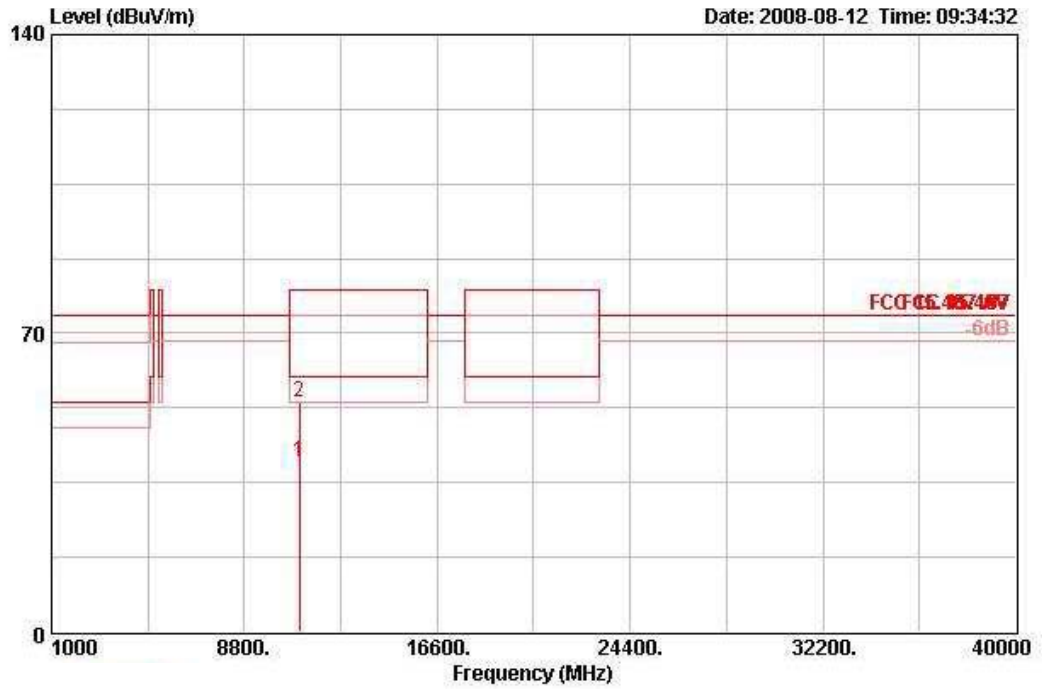

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11012.240	39.78	-20.22	60.00	29.60	38.32	6.63	34.77	AVERAGE	134	226	VERTICAL
2	11019.840	53.85	-26.15	80.00	43.67	38.32	6.63	34.77	PEAK	134	226	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 110 / Ant. 3

Horizontal

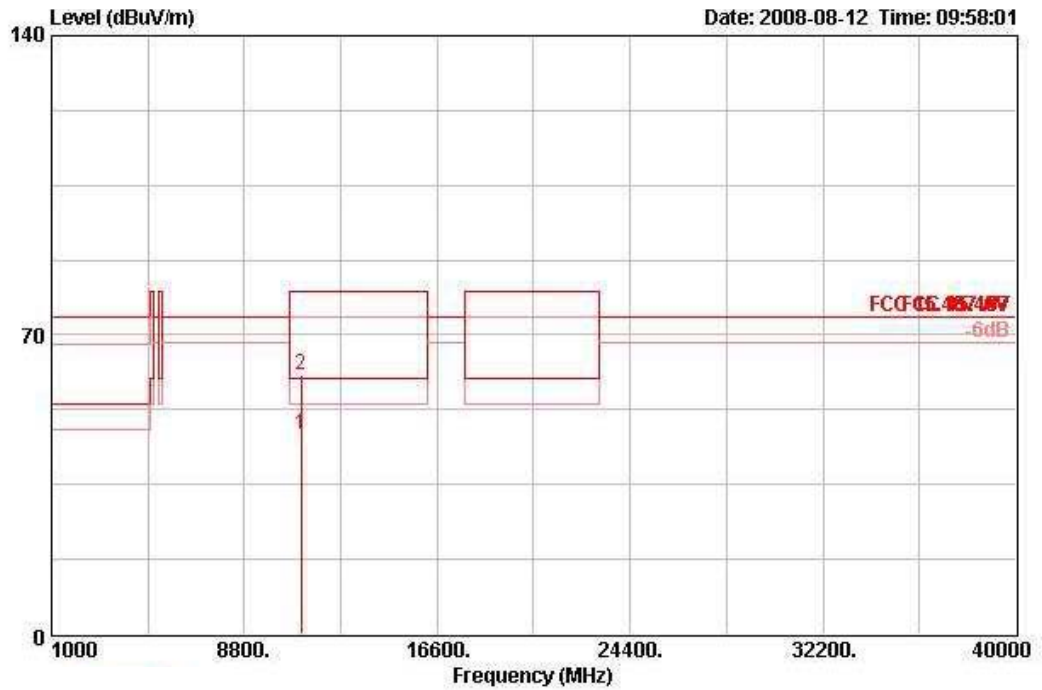

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11091.900	46.83	-13.17	60.00	36.59	38.40	6.64	34.80	AVERAGE	111	175	HORIZONTAL
2	11096.600	60.55	-19.45	80.00	50.32	38.40	6.64	34.80	PEAK	111	175	HORIZONTAL

Vertical

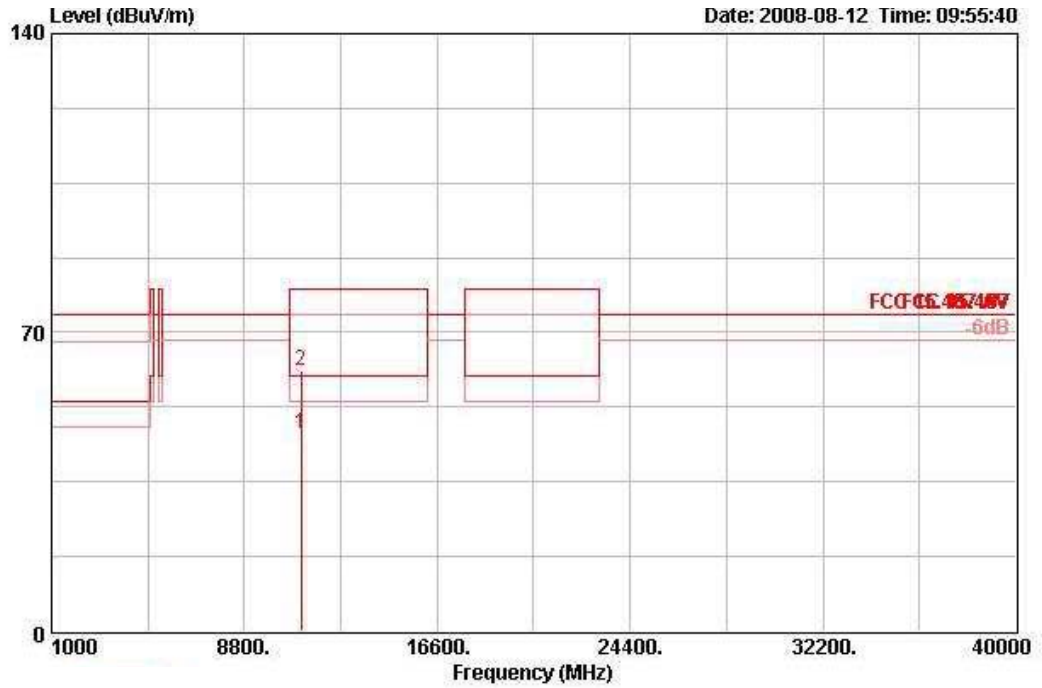


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Remark	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	11092.300	46.42	-13.58	60.00	36.19	38.40	6.64	34.80	AVERAGE	100	221 VERTICAL
2	11096.600	61.03	-18.97	80.00	50.79	38.40	6.64	34.80	PEAK	100	221 VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 134 / Ant. 3

Horizontal

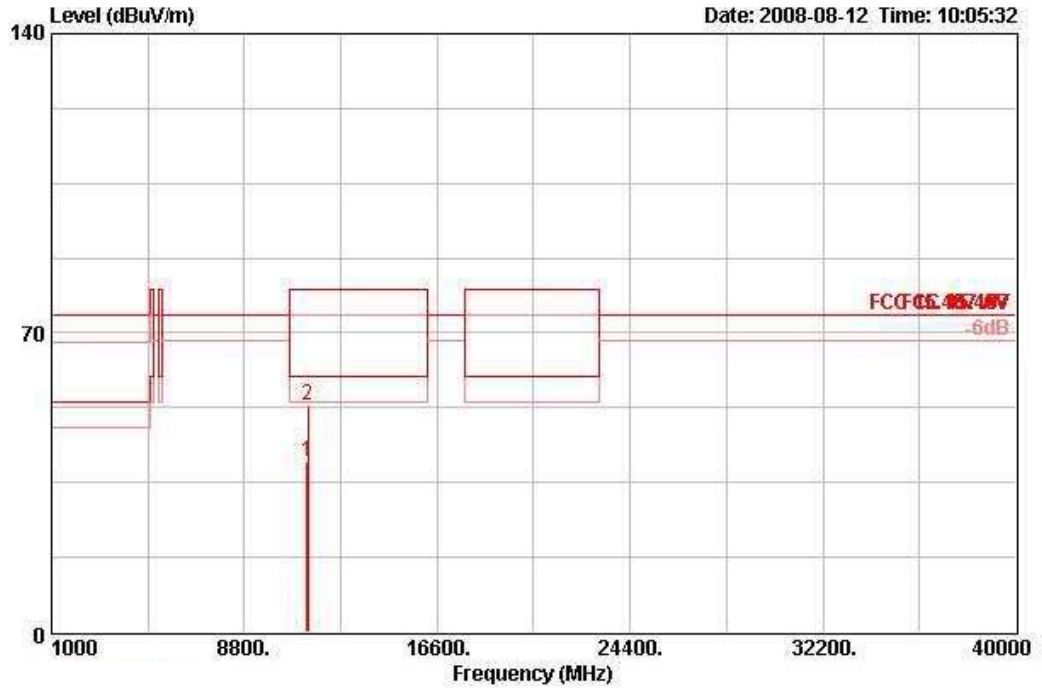

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11320.000	39.89	-20.11	60.00	29.52	38.62	6.66	34.91	AVERAGE	108	225	HORIZONTAL
2	11356.700	53.09	-26.91	80.00	42.70	38.65	6.67	34.92	PEAK	108	225	HORIZONTAL


Vertical

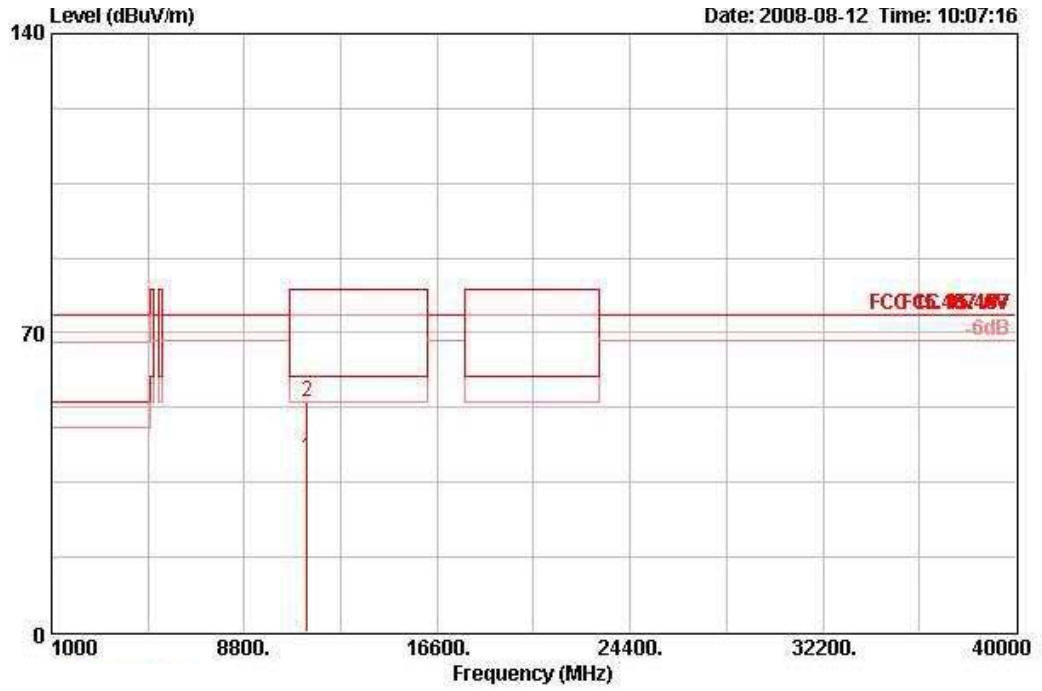

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11324.600	40.64	-19.36	60.00	30.28	38.62	6.66	34.91	AVERAGE	100	200	VERTICAL
2	11336.200	53.90	-26.10	80.00	43.51	38.63	6.66	34.91	PEAK	100	200	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 36 / Ant. 3

Horizontal

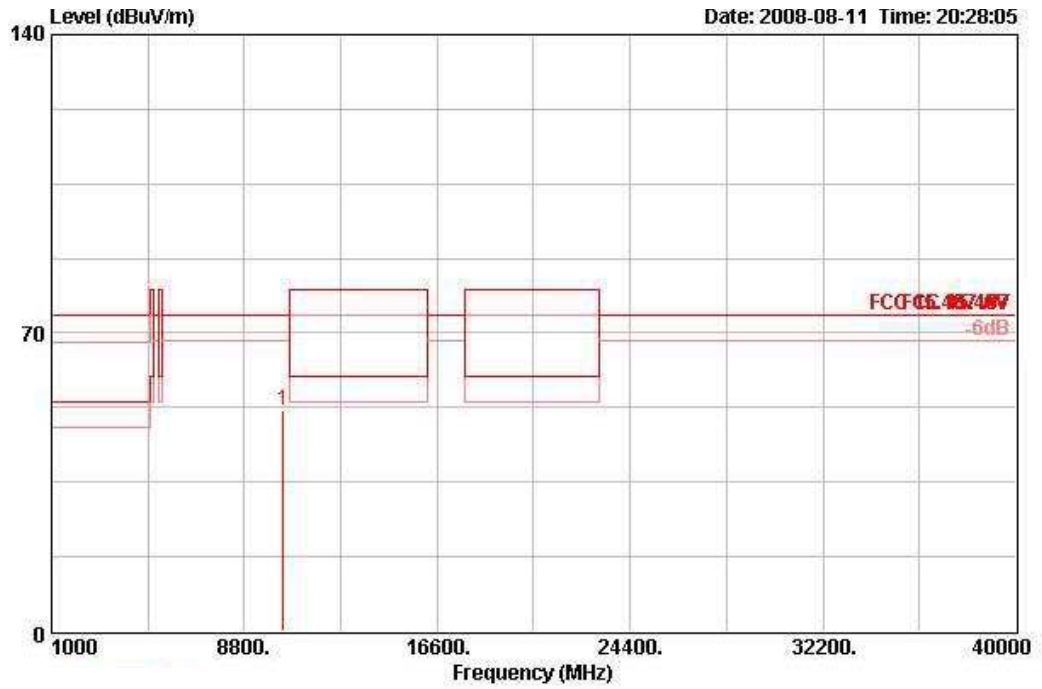

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10356.760	51.93	-22.37	74.30	42.34	38.37	6.34	35.12	AVERAGE	100	170	HORIZONTAL


Vertical

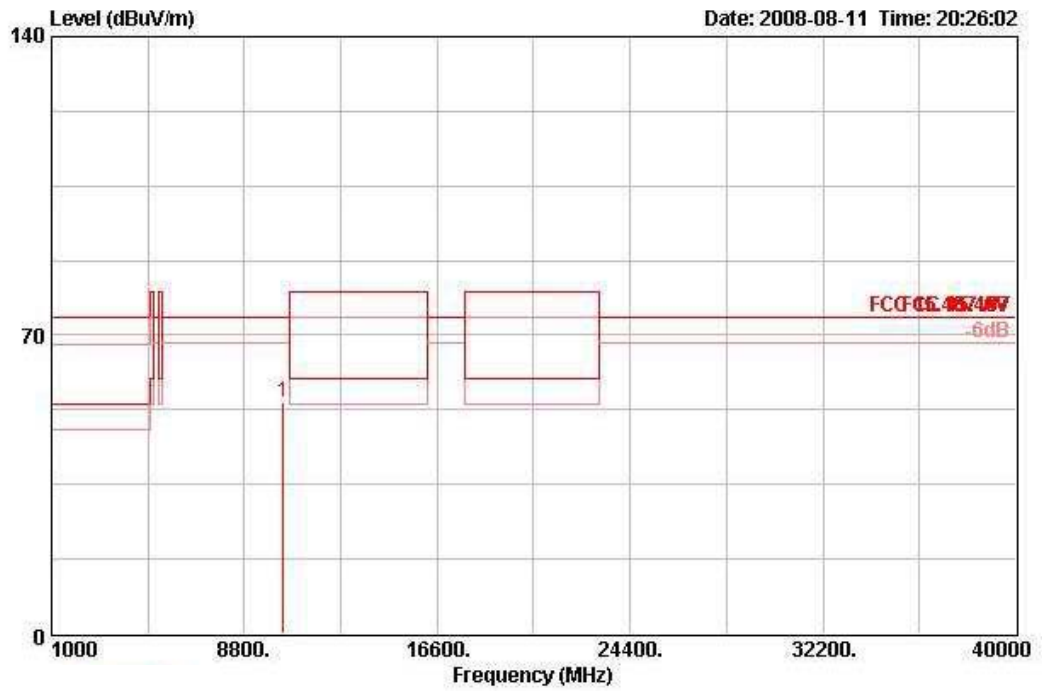

	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table		
1	Limit	Line	Level	Loss	Factor	Pos	Pos	Pol/Phase	Remark
	dB	dBuV/m	dBuV	dB	dB	cm	deg		
1	-20.14	74.30	44.57	6.34	35.12	100	234	VERTICAL	PEAK


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 40 / Ant. 3

Horizontal

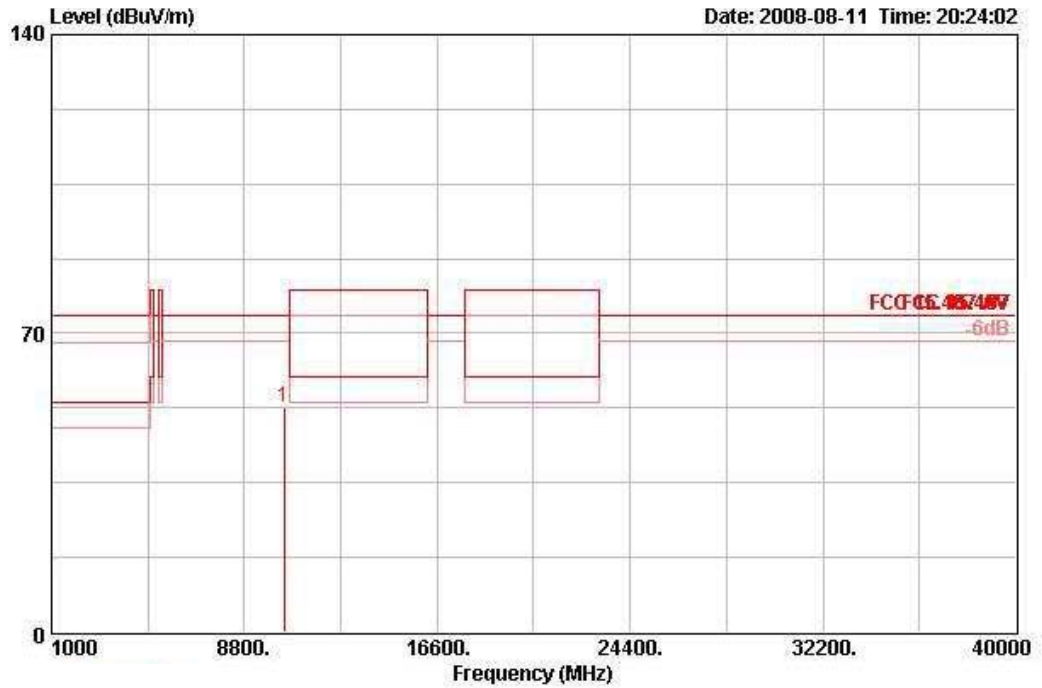

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10396.520	52.82	-21.48	74.30	43.16	38.38	6.37	35.09	PEAK	100	167	HORIZONTAL


Vertical

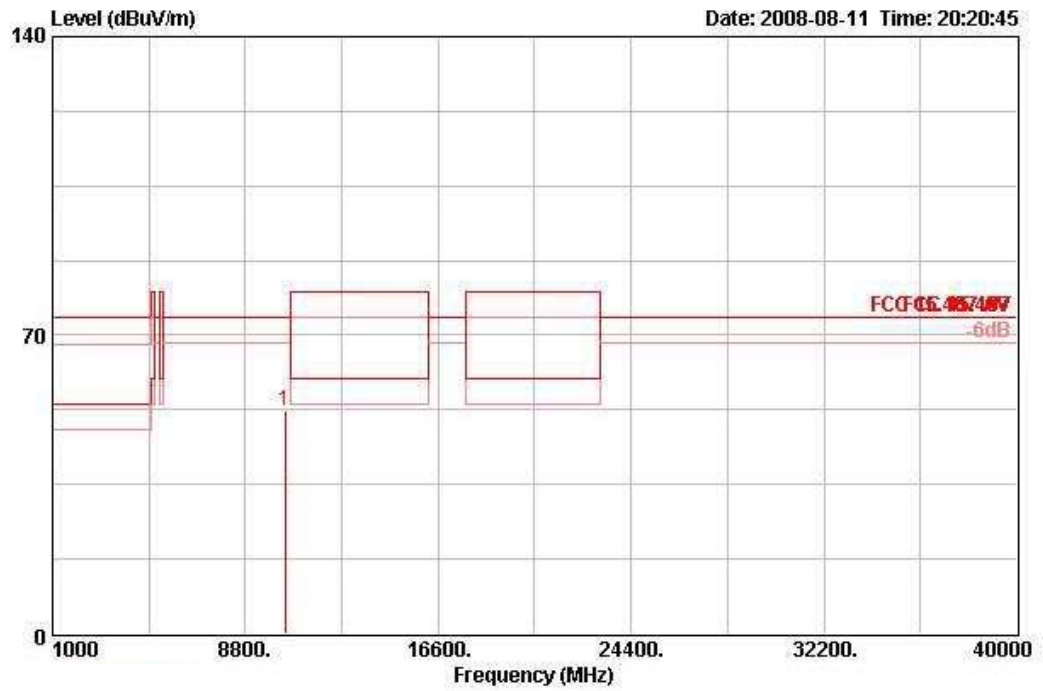

	Over	Limit	ReadAntenna	Cable Preamp		Ant	Table
1	Limit	Line	Level Factor	Loss Factor	Remark	Pos	Pos Pol/Phase
	dB	dBuV/m	dBuV	dB/m		cm	deg
1	-21.97	74.30	42.66	38.38	6.37 35.09 PEAK	100	232 VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 48 / Ant. 3

Horizontal

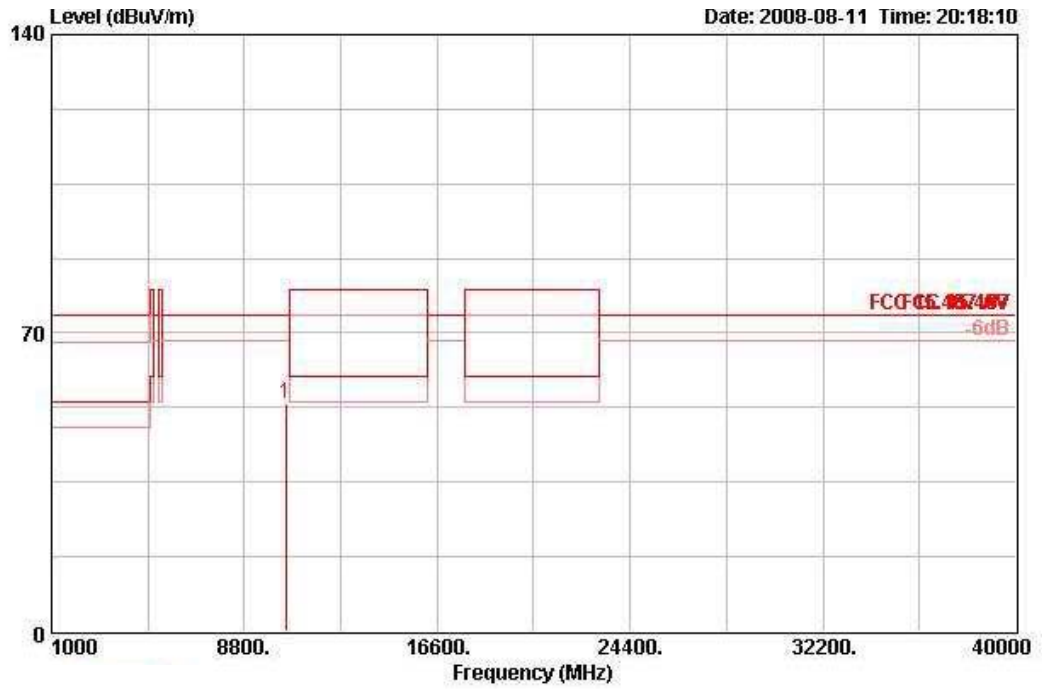

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10476.600	53.62	-20.68	74.30	43.73	38.39	6.46	34.96	PERK	100	169	HORIZONTAL

Vertical

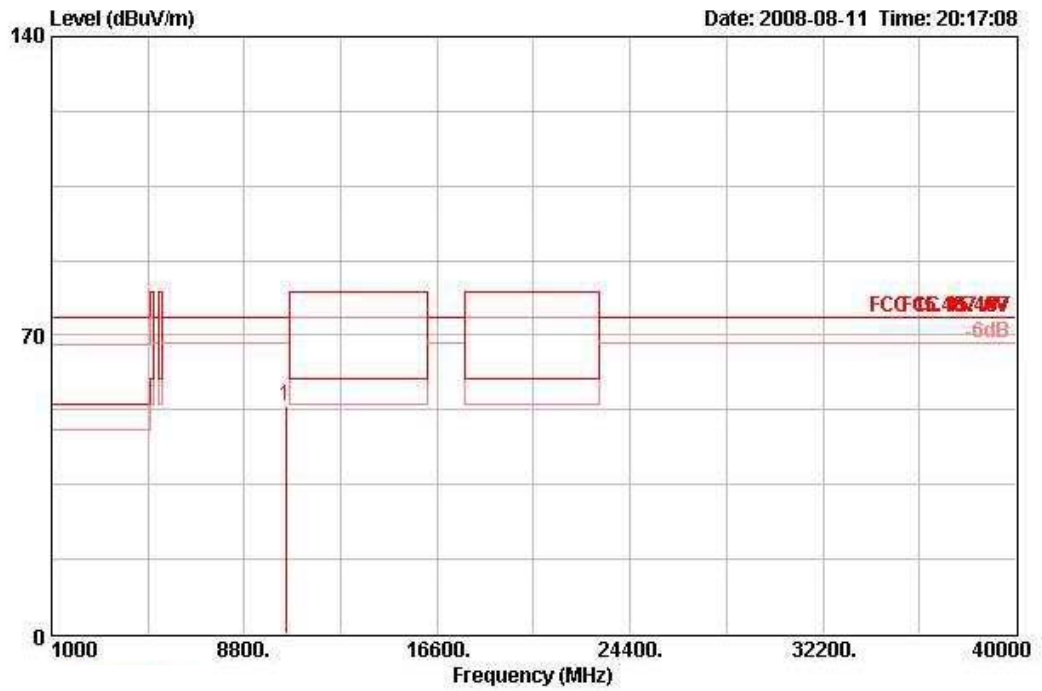


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10475.340	53.27	-21.03	74.30	43.37	38.39	6.46	34.96	PEAK	100	231	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 52 / Ant. 3

Horizontal

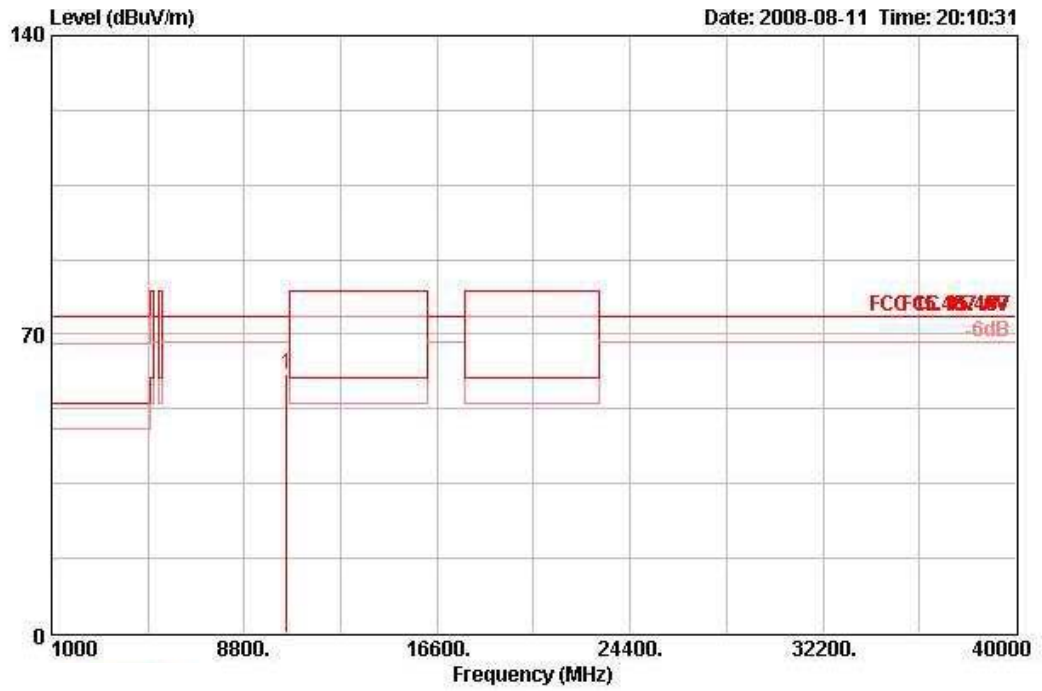

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10517.580	60.53	-13.77	74.30	50.58	38.40	6.48	34.93	PEAK	100	169	HORIZONTAL


Vertical

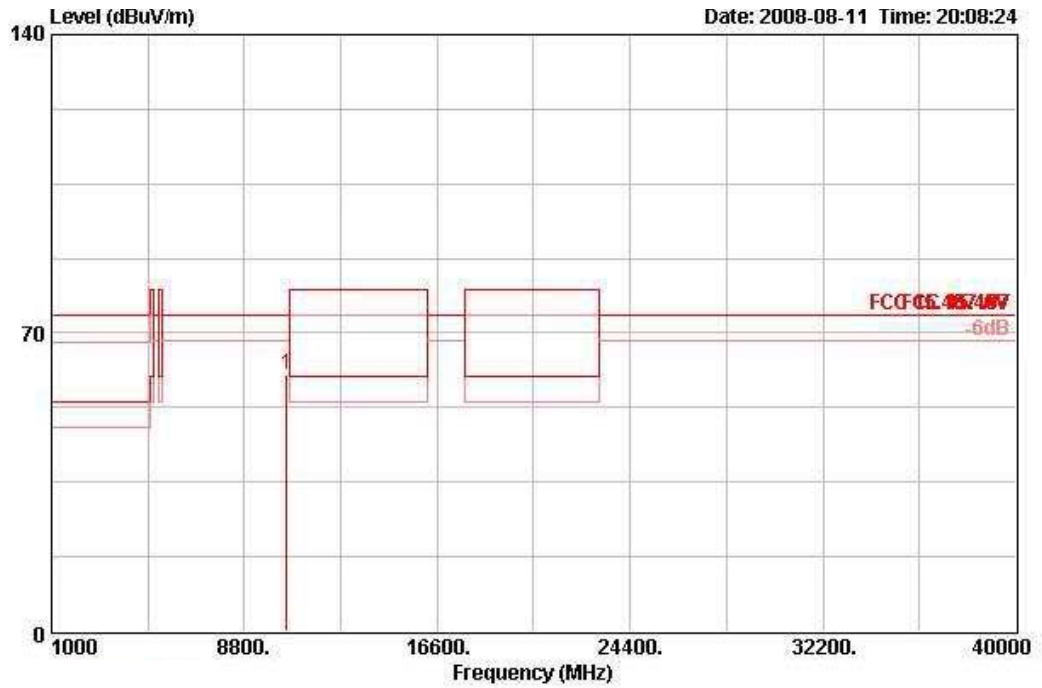

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10516.780	60.33	-13.97	74.30	50.38	38.39	6.48	34.93	PEAK	100	206	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 60 / Ant. 3

Horizontal

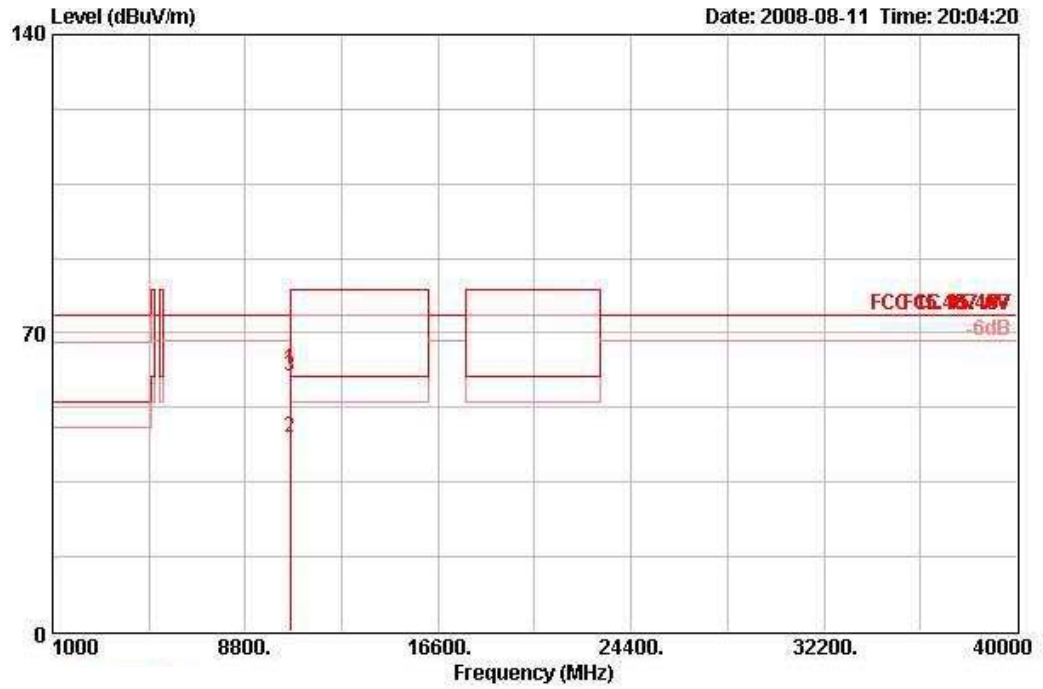

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10596.940	61.39	-12.91	74.30	51.40	38.38	6.51	34.90	PEAK	100	166	HORIZONTAL
2	10601.860	45.32	-14.68	60.00	35.31	38.38	6.52	34.89	AVERAGE	100	166	HORIZONTAL
3	10602.040	59.71	-20.29	80.00	49.70	38.38	6.52	34.89	PEAK	100	166	HORIZONTAL


Vertical

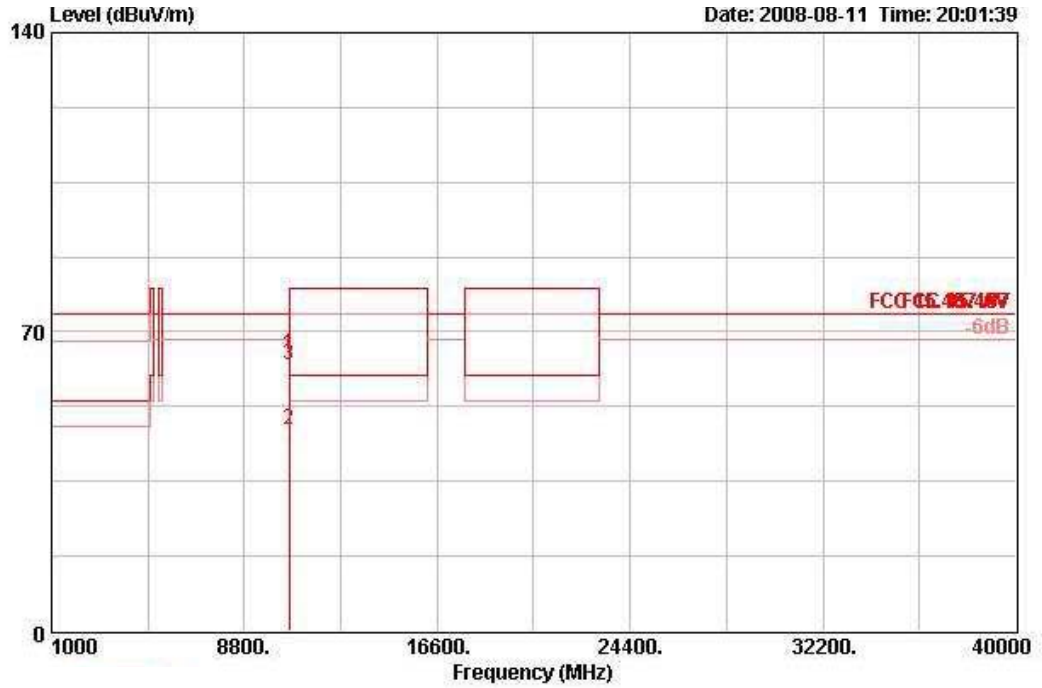

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10597.920	64.45	-9.85	74.30	54.46	38.38	6.51	34.90	PEAK	100	225	VERTICAL
2	10601.640	47.09	-12.91	60.00	37.08	38.38	6.52	34.89	AVERAGE	100	225	VERTICAL
3	10602.060	62.28	-17.72	80.00	52.27	38.38	6.52	34.89	PEAK	100	225	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 64 / Ant. 3

Horizontal

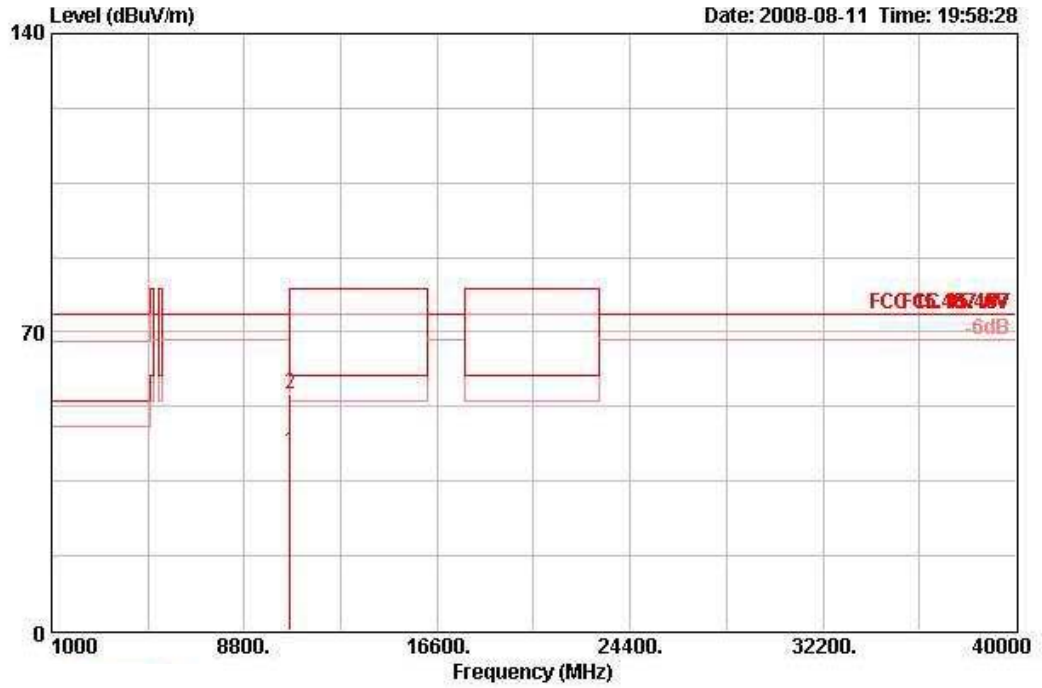

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	10636.820	41.95	-18.05	60.00	31.93	38.37	6.53	34.88	AVERAGE	113	168 HORIZONTAL
2	10641.040	55.58	-24.42	80.00	45.57	38.37	6.53	34.88	PEAK	113	168 HORIZONTAL


Vertical

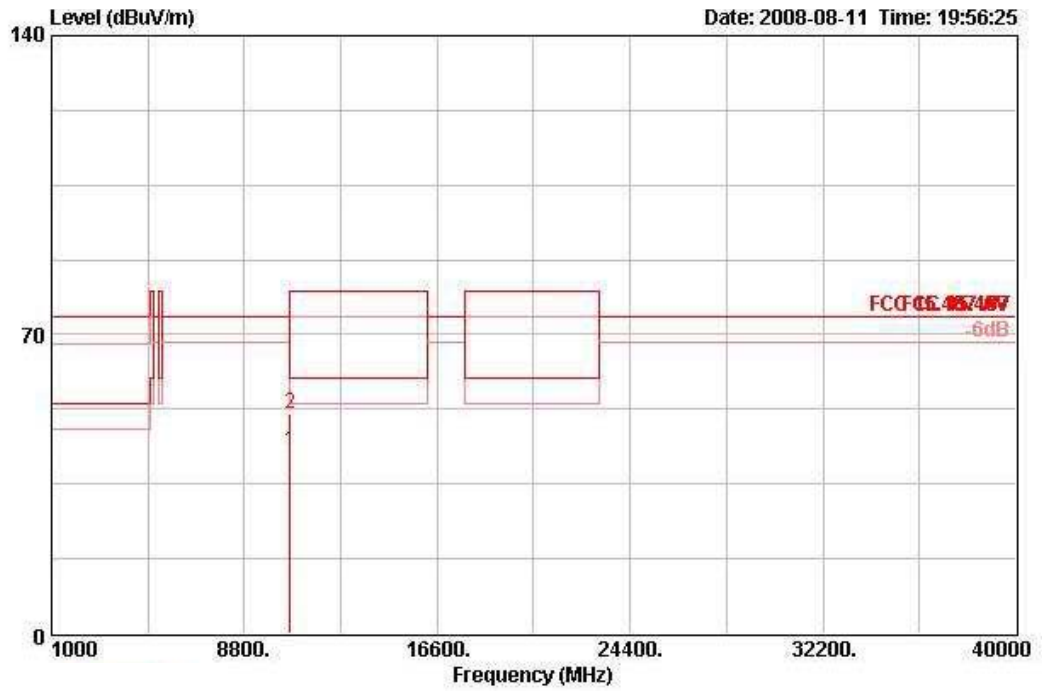

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10641.380	42.56	-17.44	60.00	32.54	38.37	6.53	34.88	AVERAGE	106	206	VERTICAL
2	10641.940	51.45	-28.55	80.00	41.43	38.37	6.53	34.88	PEAK	106	206	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 100 / Ant. 3

Horizontal

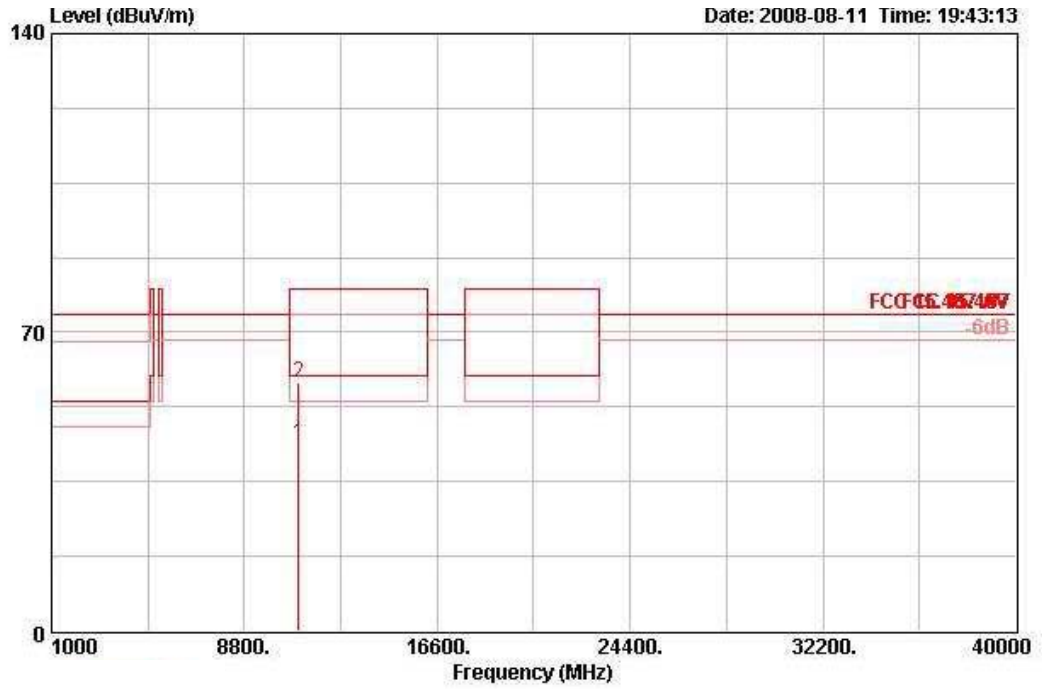

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.320	44.07	-15.93	60.00	33.88	38.32	6.63	34.76	AVERAGE	113	161	HORIZONTAL
2	11000.260	58.22	-21.78	80.00	48.03	38.32	6.63	34.76	PEAK	113	161	HORIZONTAL


Vertical

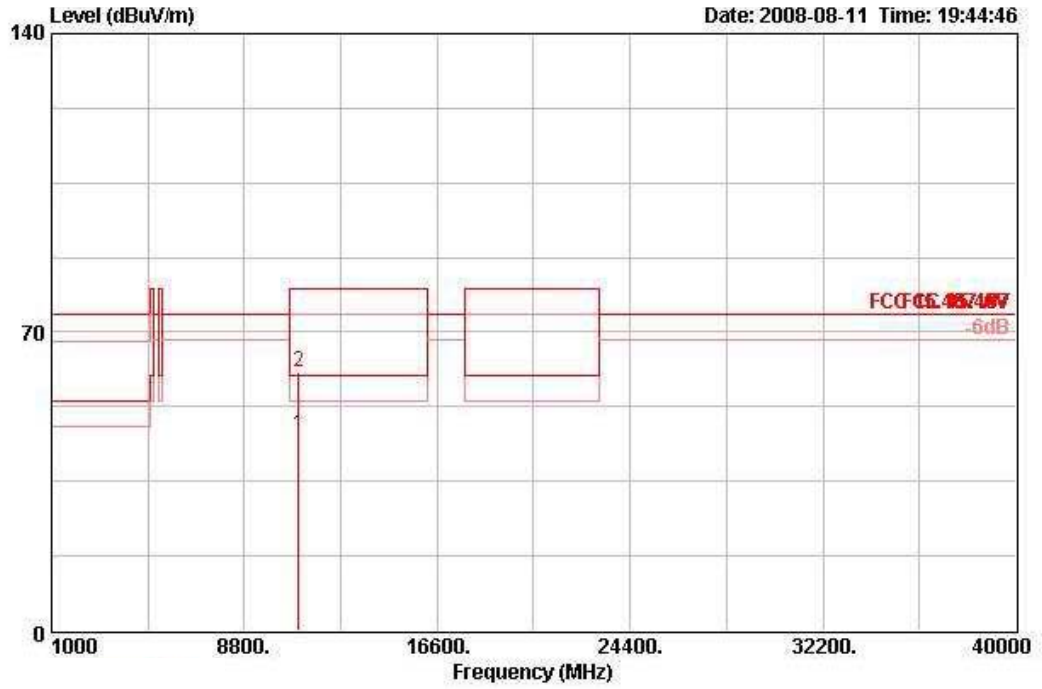

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.720	45.85	-14.15	60.00	35.67	38.30	6.63	34.76	AVERAGE	129	226	VERTICAL
2	11001.020	60.48	-19.52	80.00	50.31	38.30	6.63	34.76	PEAK	129	226	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 116 / Ant. 3

Horizontal

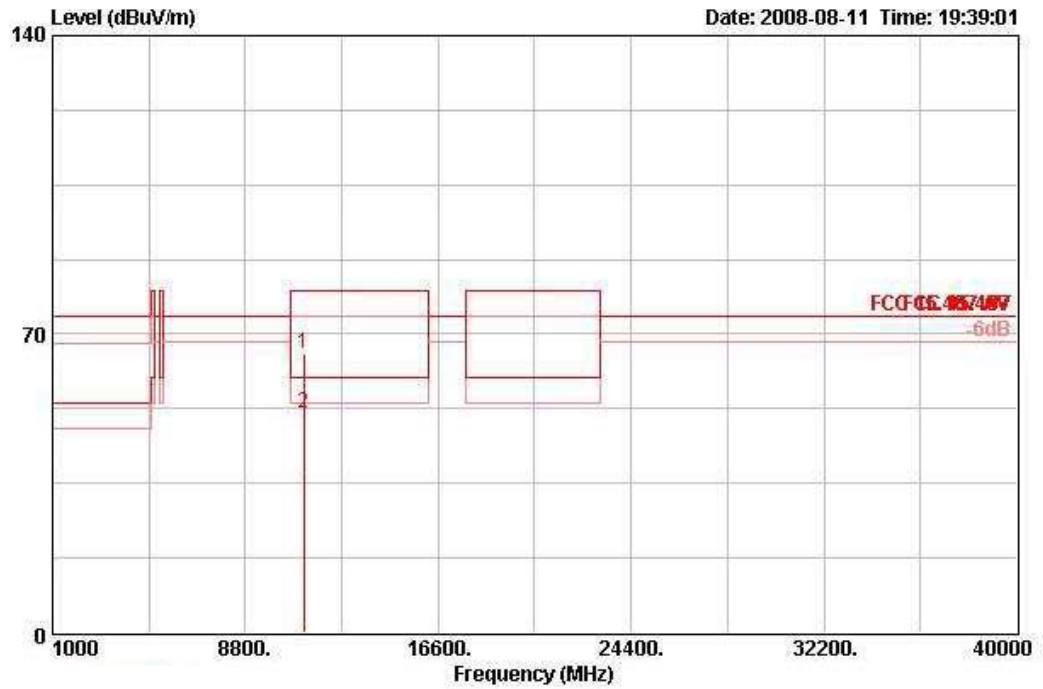

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11156.440	65.44	-14.56	80.00	55.17	38.45	6.65	34.83	PEAK	110	176	HORIZONTAL
2	11157.620	51.56	-8.44	60.00	41.29	38.45	6.65	34.83	AVERAGE	110	176	HORIZONTAL


Vertical

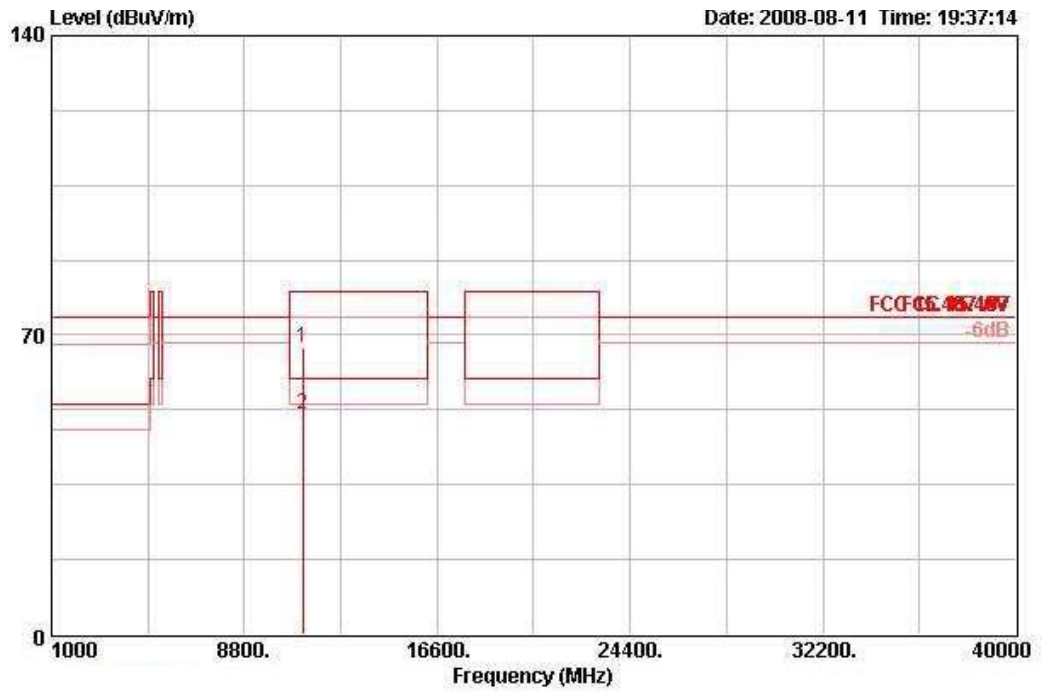

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Factor		cm	Pos	Pol/Phase
1	11155.460	66.85	-13.15	80.00	56.58	38.45	6.65	34.83	PEAK	100	222	VERTICAL
2	11156.560	51.51	-8.49	60.00	41.24	38.45	6.65	34.83	AVERAGE	100	222	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a Ch 140 / Ant. 3

Horizontal

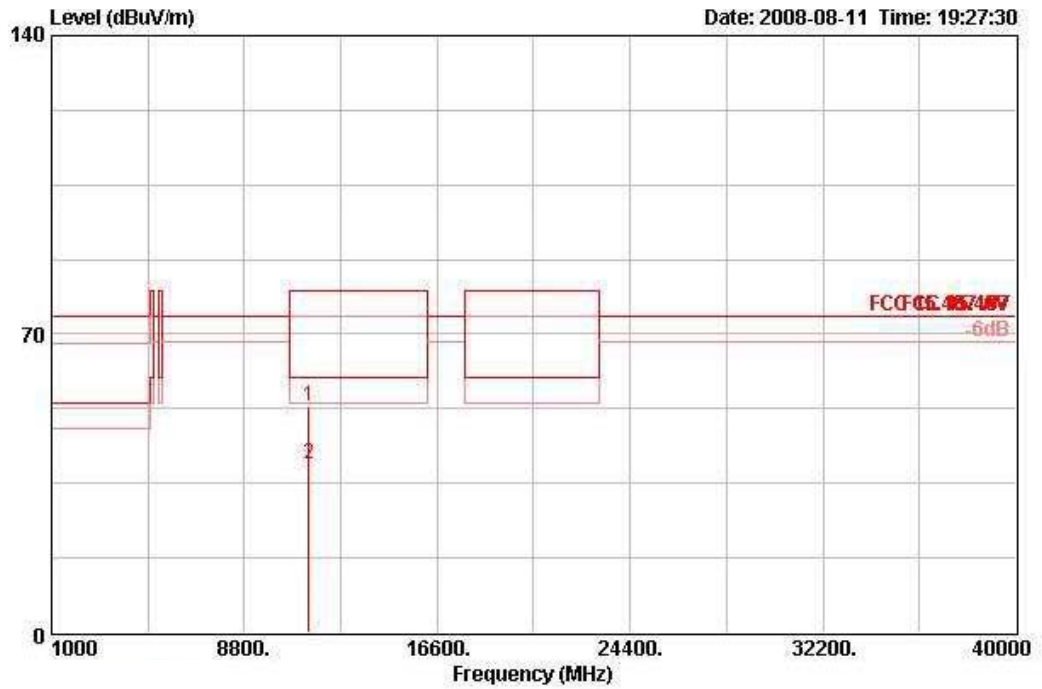

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11396.000	53.24	-26.76	80.00	42.83	38.68	6.67	34.95	PEAK	100	170	HORIZONTAL
2	11400.000	39.32	-20.68	60.00	28.90	38.70	6.67	34.95	AVERAGE	100	170	HORIZONTAL

Vertical

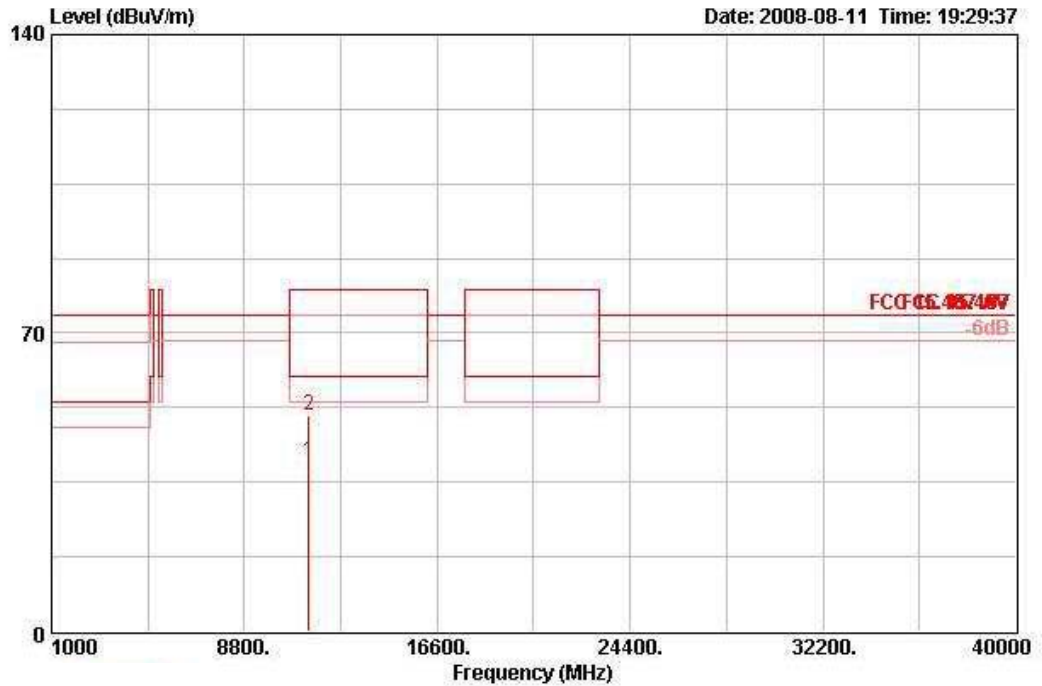

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	11400.000	39.92	-20.08	60.00	29.49	38.70	6.67	34.95	AVERAGE	100	197 VERTICAL
2	11400.000	50.70	-29.30	80.00	40.27	38.70	6.67	34.95	PEAK	100	197 VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.


Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 36 / Ant. 4

Horizontal

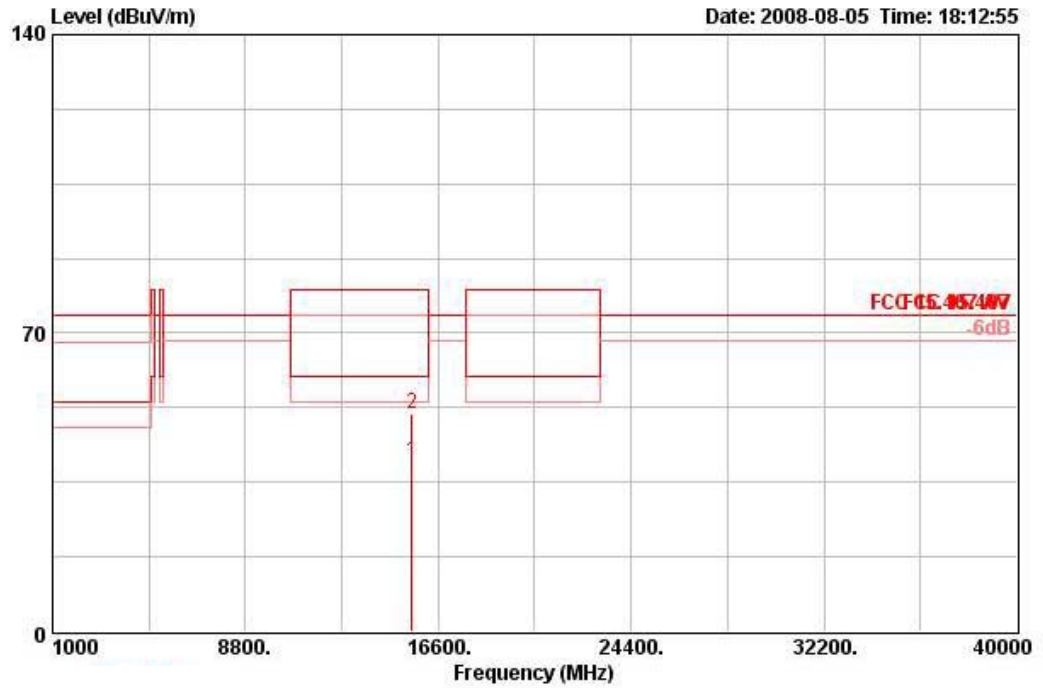

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15540.200	39.91	-20.09	60.00	31.34	37.65	6.20	35.28	AVERAGE	100	97	HORIZONTAL
2	15540.200	51.01	-28.99	80.00	42.44	37.65	6.20	35.28	PEAK	100	97	HORIZONTAL

Vertical

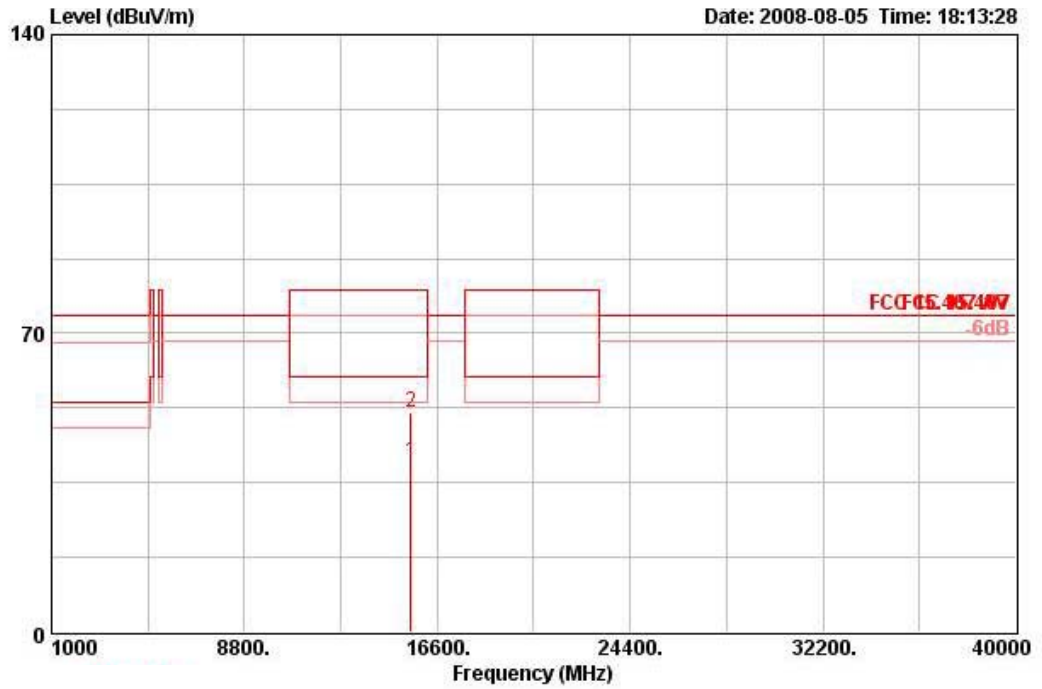


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15540.200	39.86	-20.14	60.00	31.26	37.69	6.20	35.28	AVERAGE	100	281	VERTICAL
2	15540.200	51.56	-28.44	80.00	42.96	37.69	6.20	35.28	PEAK	100	281	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 40 / Ant. 4

Horizontal

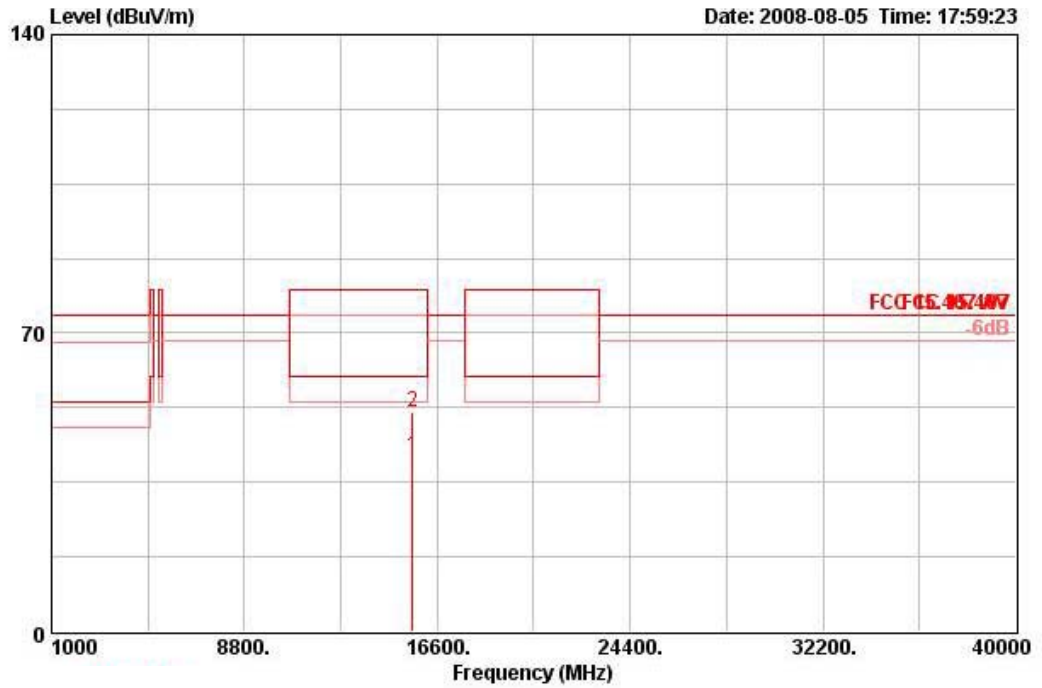

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15601.200	40.97	-19.03	60.00	32.49	37.60	6.18	35.30	AVERAGE	100	63	HORIZONTAL
2	15601.200	51.33	-28.67	80.00	42.86	37.60	6.18	35.30	PEAK	100	63	HORIZONTAL


Vertical

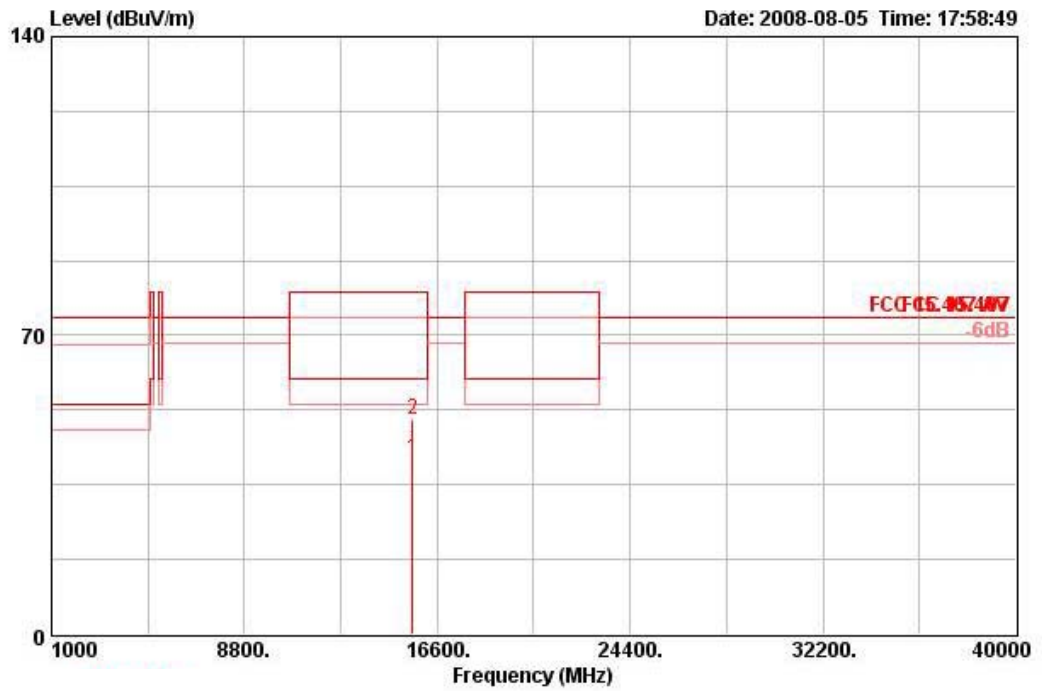

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15601.200	40.89	-19.11	60.00	32.41	37.60	6.18	35.30	AVERAGE	100	275	VERTICAL
2	15601.200	50.28	-29.72	80.00	41.80	37.60	6.18	35.30	PEAK	100	275	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 48 / Ant. 4

Horizontal

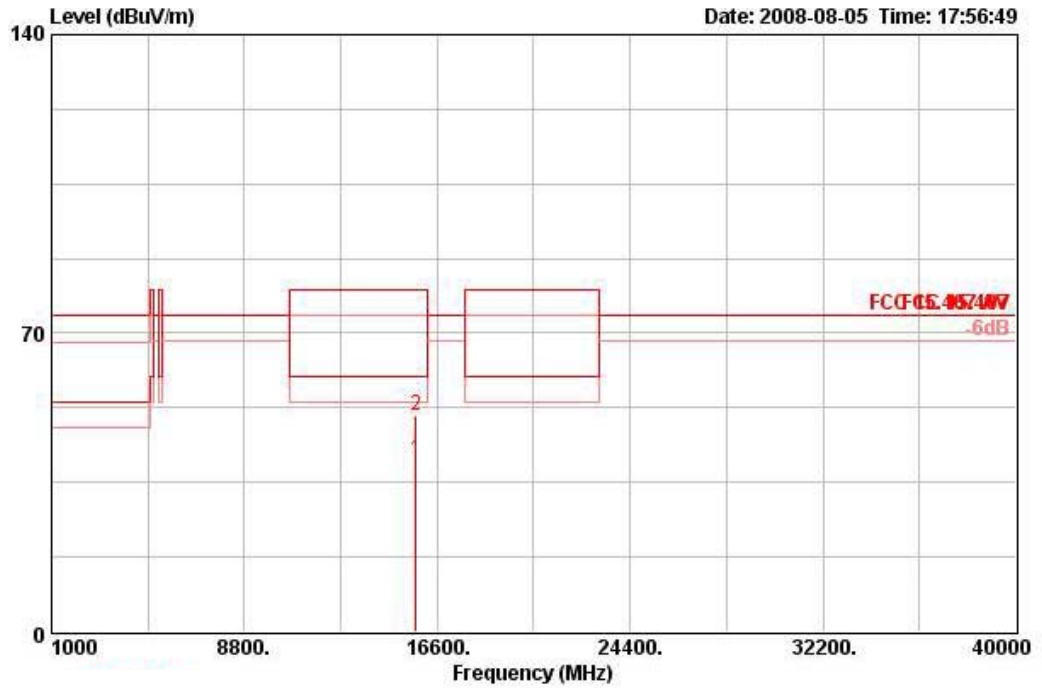

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15720.000	40.42	-19.58	60.00	32.17	37.48	6.12	35.35	AVERAGE	100	185	HORIZONTAL
2	15720.000	50.49	-29.51	80.00	42.23	37.48	6.12	35.35	PEAK	100	185	HORIZONTAL


Vertical

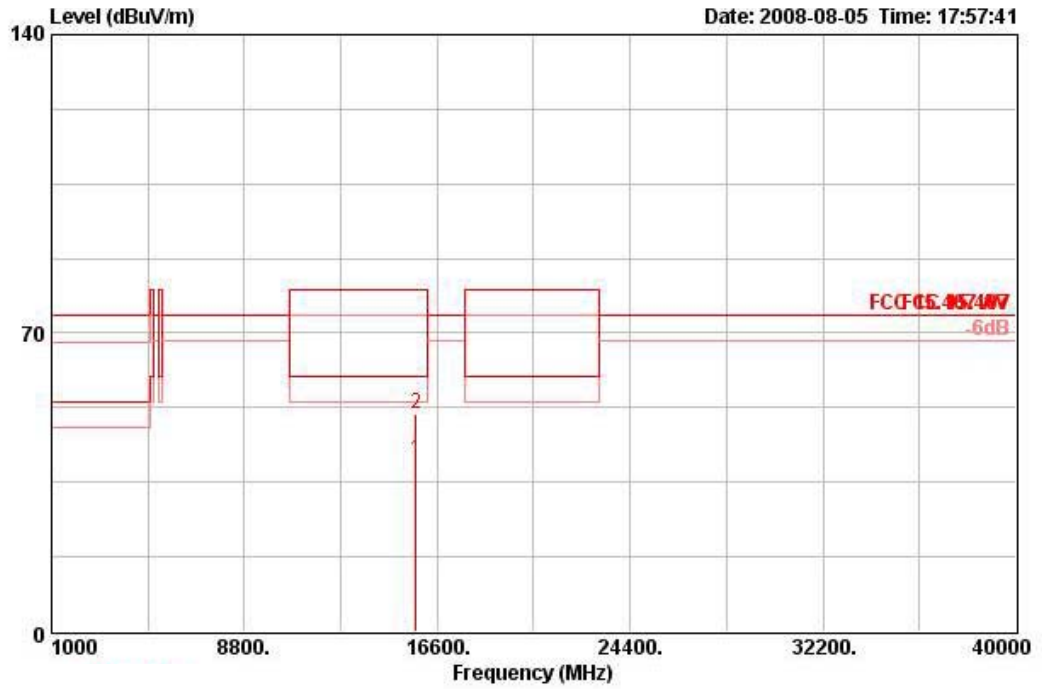

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15720.000	40.42	-19.58	60.00	32.17	37.48	6.12	35.35	AVERAGE	100	265	VERTICAL
2	15720.000	51.25	-28.75	80.00	43.00	37.48	6.12	35.35	PEAK	100	265	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 52 / Ant. 4

Horizontal

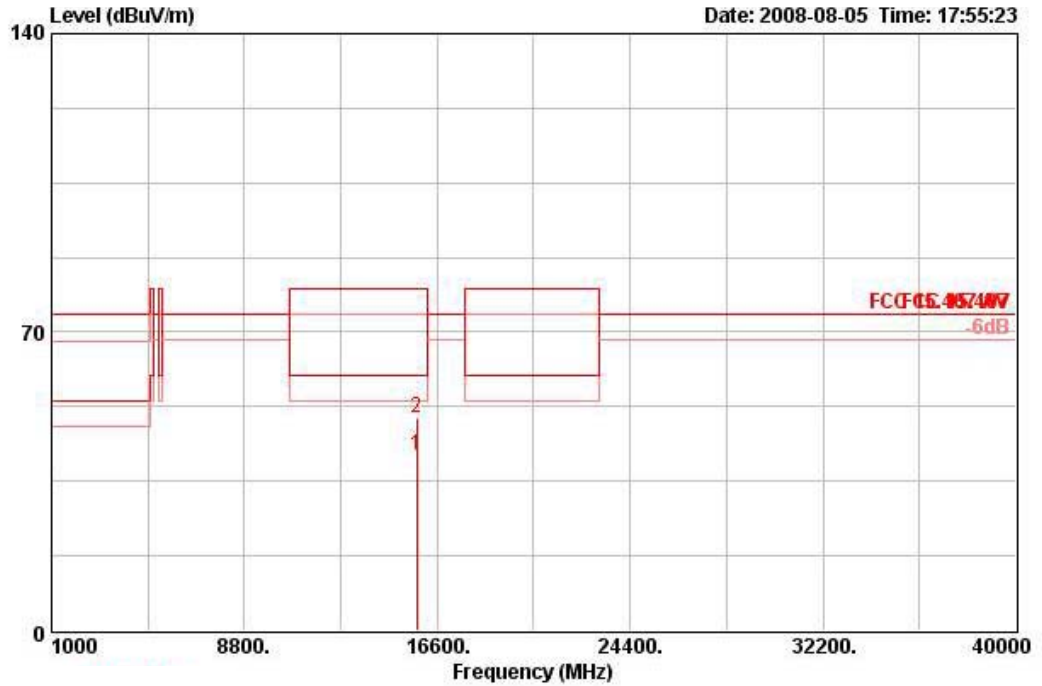

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15780.800	40.90	-19.10	60.00	32.76	37.41	6.10	35.36	AVERAGE	100	188	HORIZONTAL
2	15780.800	49.94	-30.06	80.00	41.80	37.41	6.10	35.36	PEAK	100	188	HORIZONTAL


Vertical

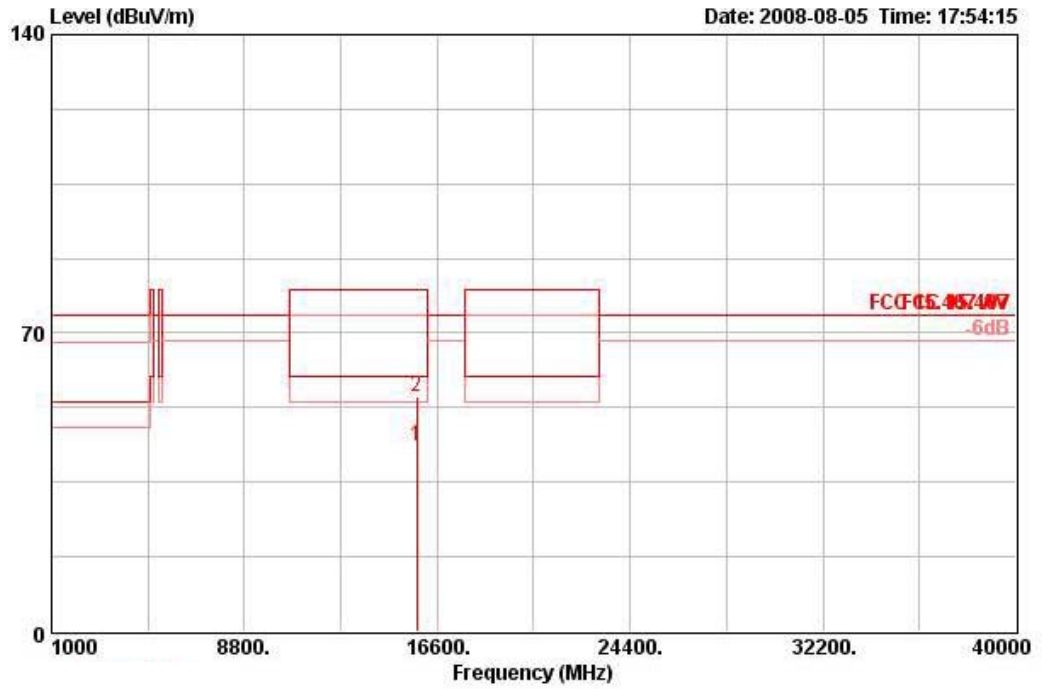

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15780.800	43.55	-16.45	60.00	35.41	37.41	6.10	35.36	AVERAGE	100	175	VERTICAL
2	15780.800	54.88	-25.12	80.00	46.73	37.41	6.10	35.36	PEAK	100	175	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 60 / Ant. 4

Horizontal

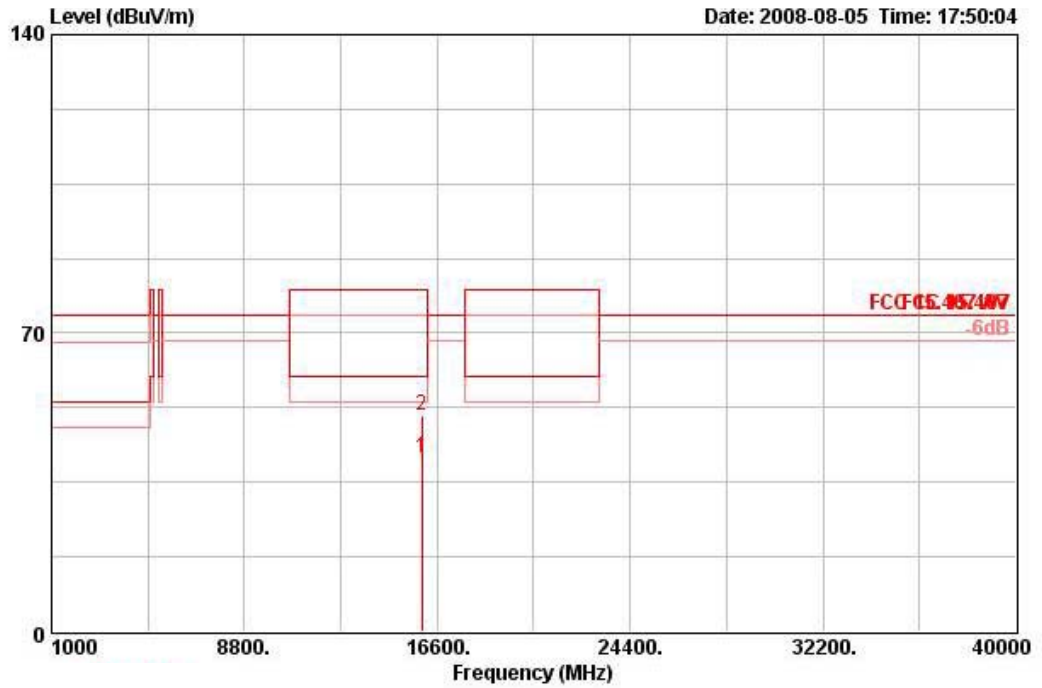

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15980.800	40.67	-19.33	60.00	32.89	37.20	6.01	35.44	AVERAGE	100	100	HORIZONTAL
2	15980.800	50.85	-29.15	80.00	43.07	37.20	6.01	35.44	PEAK	100	100	HORIZONTAL


Vertical

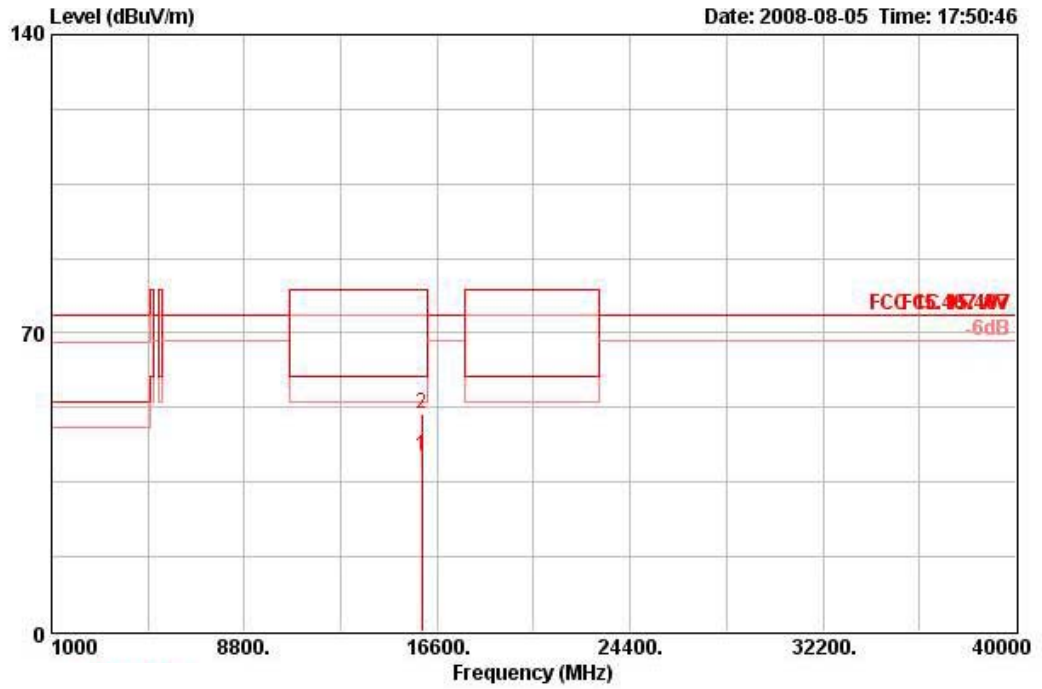

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor		Pos	Pos	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15980.800	41.16	-18.84	60.00	33.35	37.23	6.01	35.44	AVERAGE	100	223	VERTICAL
2	15980.800	50.89	-29.11	80.00	43.08	37.23	6.01	35.44	PEAK	100	223	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 64 / Ant. 4

Horizontal

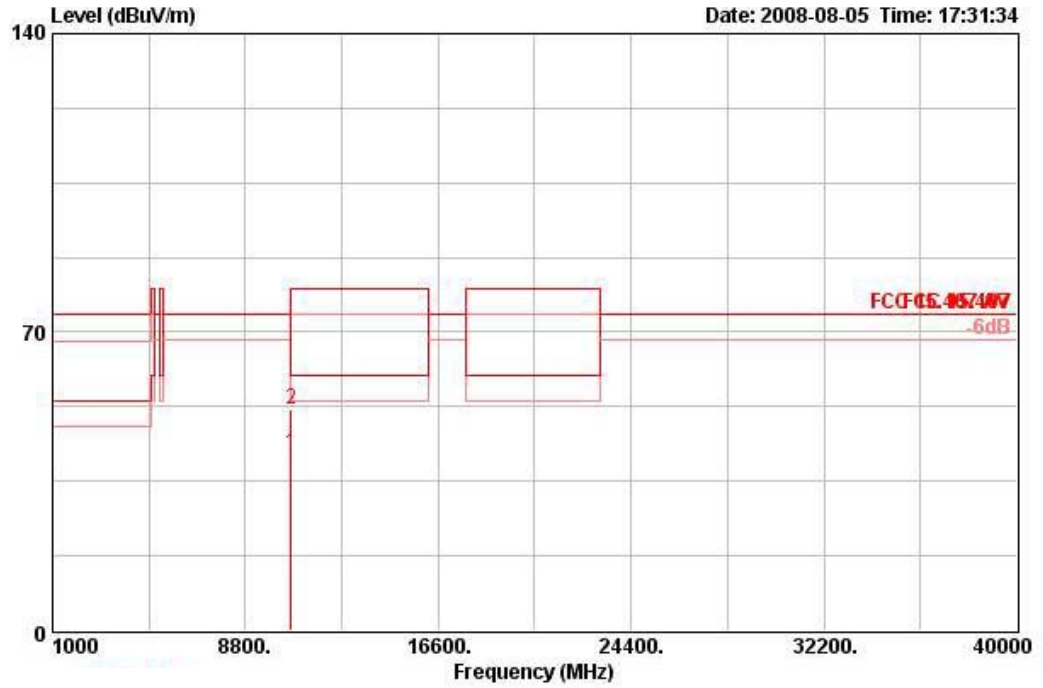

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg	
1	10640.600	41.29	-18.71	60.00	31.27	38.37	6.53	34.88	AVERAGE	100	131 HORIZONTAL
2	10640.600	51.70	-28.30	80.00	41.68	38.37	6.53	34.88	PEAK	100	131 HORIZONTAL


Vertical

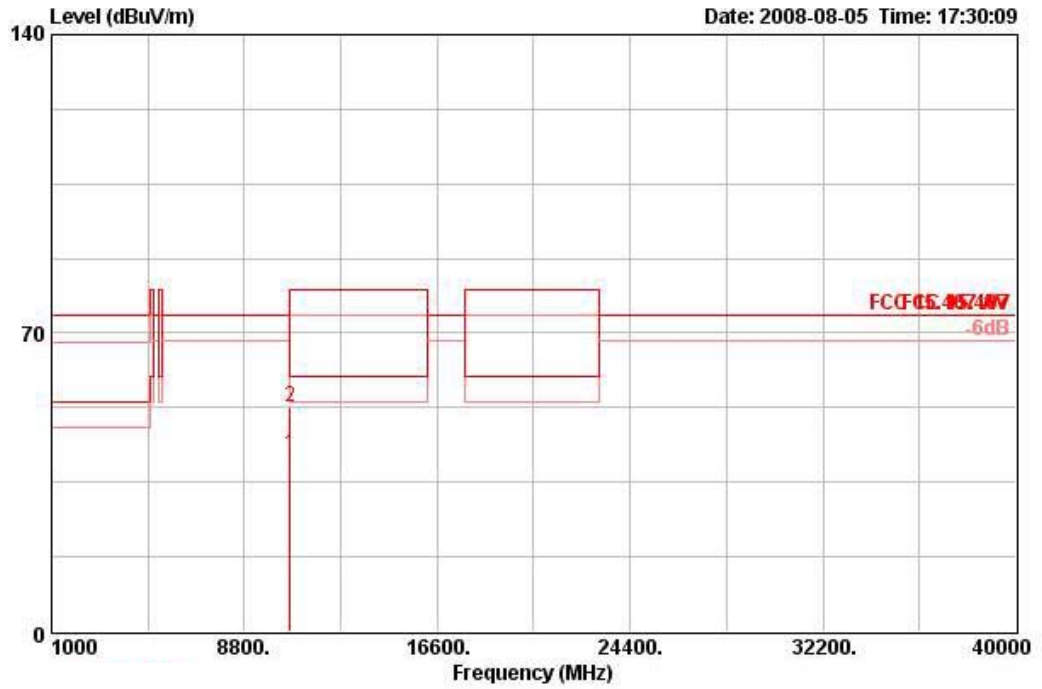

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10640.600	41.60	-18.40	60.00	31.58	38.37	6.53	34.88	AVERAGE	100	166	VERTICAL
2	10640.600	52.83	-27.17	80.00	42.81	38.37	6.53	34.88	PEAK	100	166	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 100 / Ant. 4

Horizontal

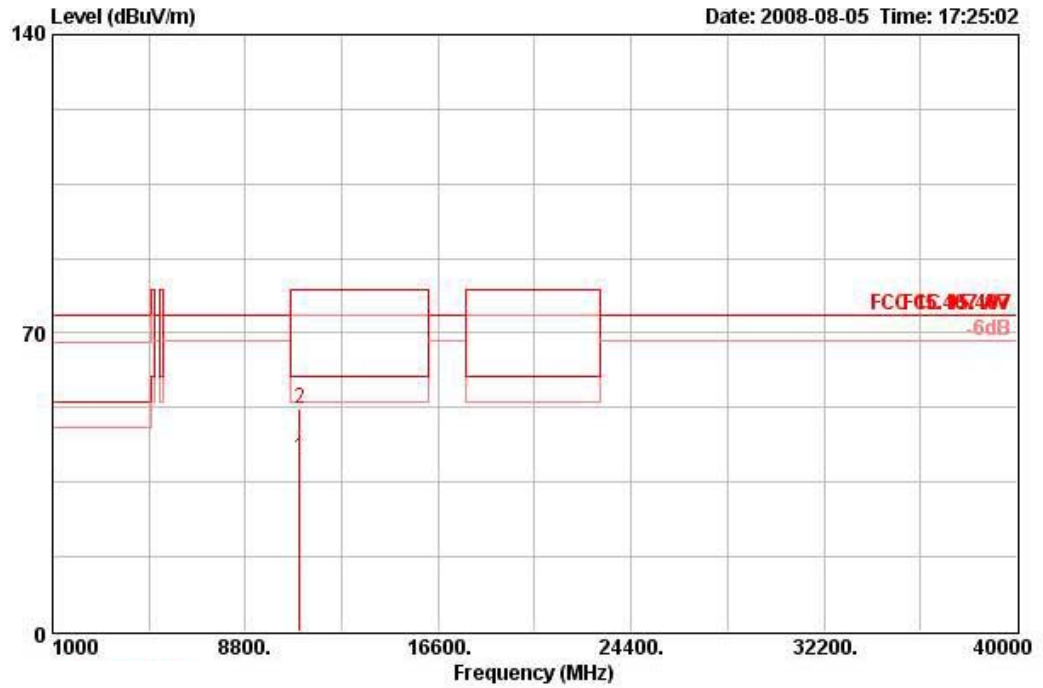

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11000.400	40.75	-19.25	60.00	30.56	38.32	6.63	34.76	AVERAGE	100	136	HORIZONTAL
2	11000.400	52.44	-27.56	80.00	42.25	38.32	6.63	34.76	PEAK	100	136	HORIZONTAL


Vertical

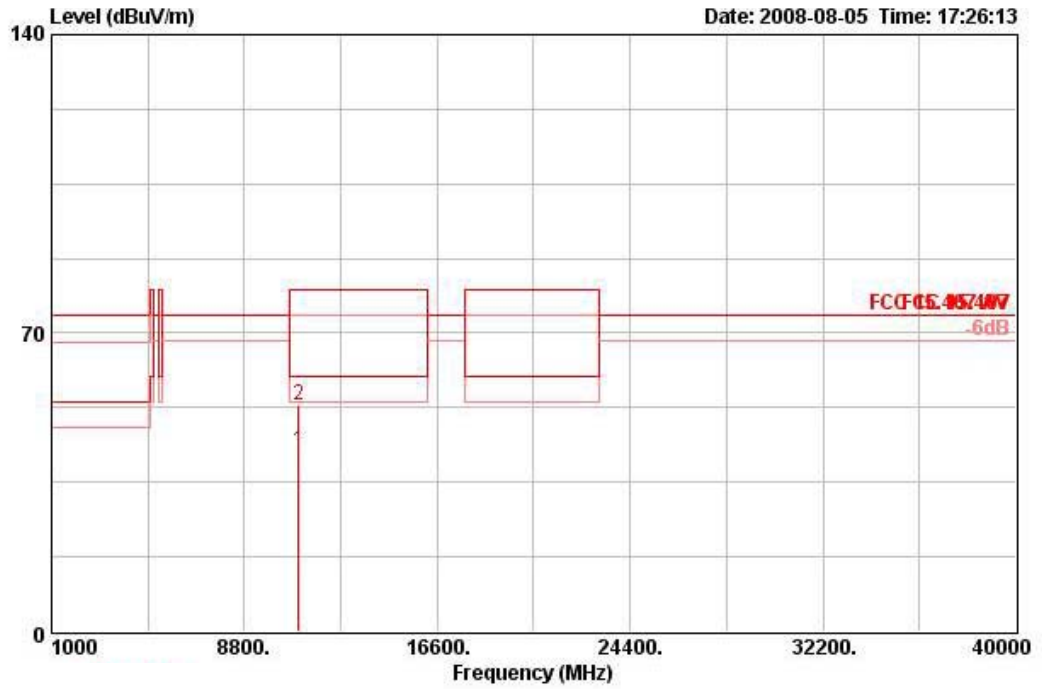

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11000.400	42.26	-17.74	60.00	32.09	38.30	6.63	34.76	AVERAGE	100	163	VERTICAL
2	11000.400	53.11	-26.89	80.00	42.94	38.30	6.63	34.76	PEAK	100	163	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 116 / Ant. 4

Horizontal

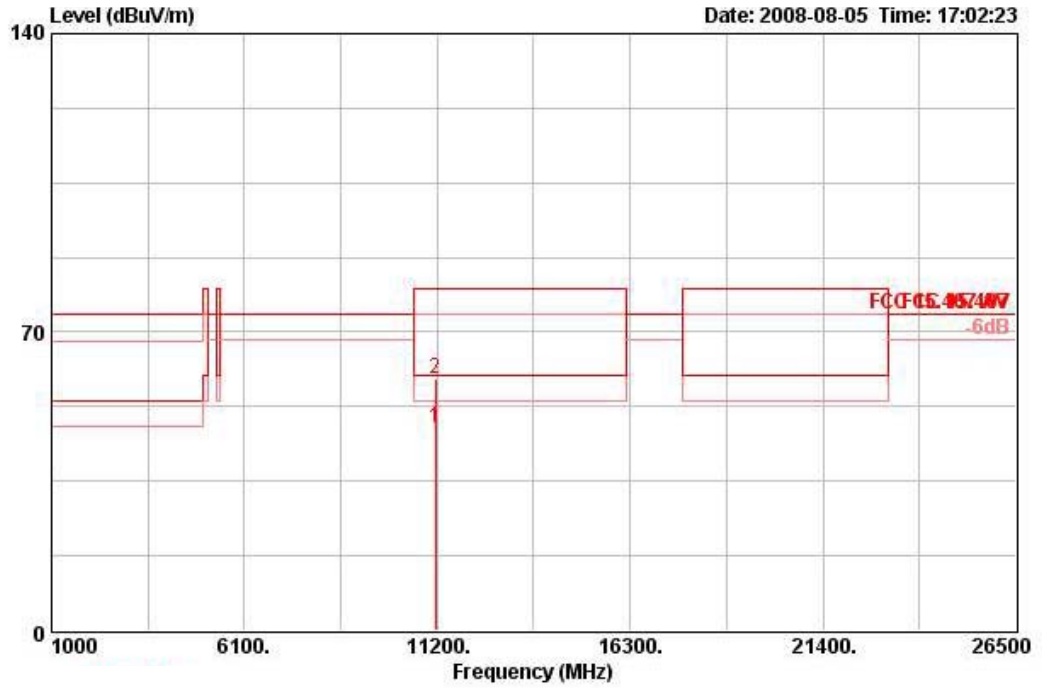

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11159.800	47.33	-12.67	60.00	37.05	38.47	6.65	34.83	AVERAGE	112	149	HORIZONTAL
2	11159.800	59.22	-20.78	80.00	48.94	38.47	6.65	34.83	PEAK	112	149	HORIZONTAL

Vertical

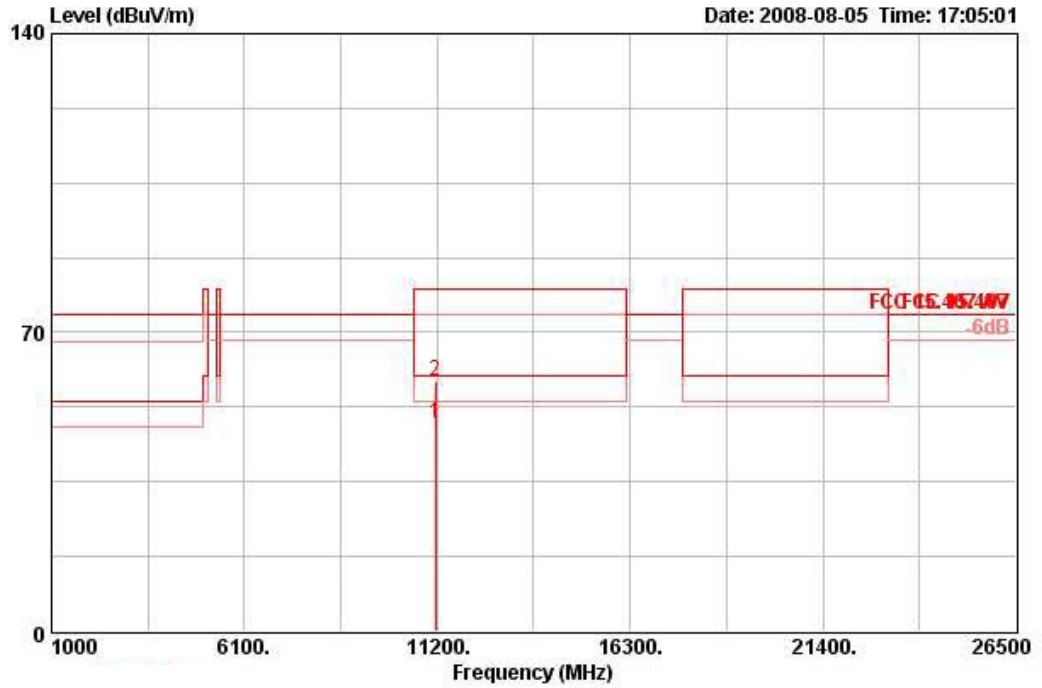


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11159.800	48.57	-11.43	60.00	38.29	38.47	6.65	34.83	AVERAGE	100	182	VERTICAL
2	11159.800	58.68	-21.32	80.00	48.39	38.47	6.65	34.83	PEAK	100	182	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 20MHz Ch 140 / Ant. 4

Horizontal

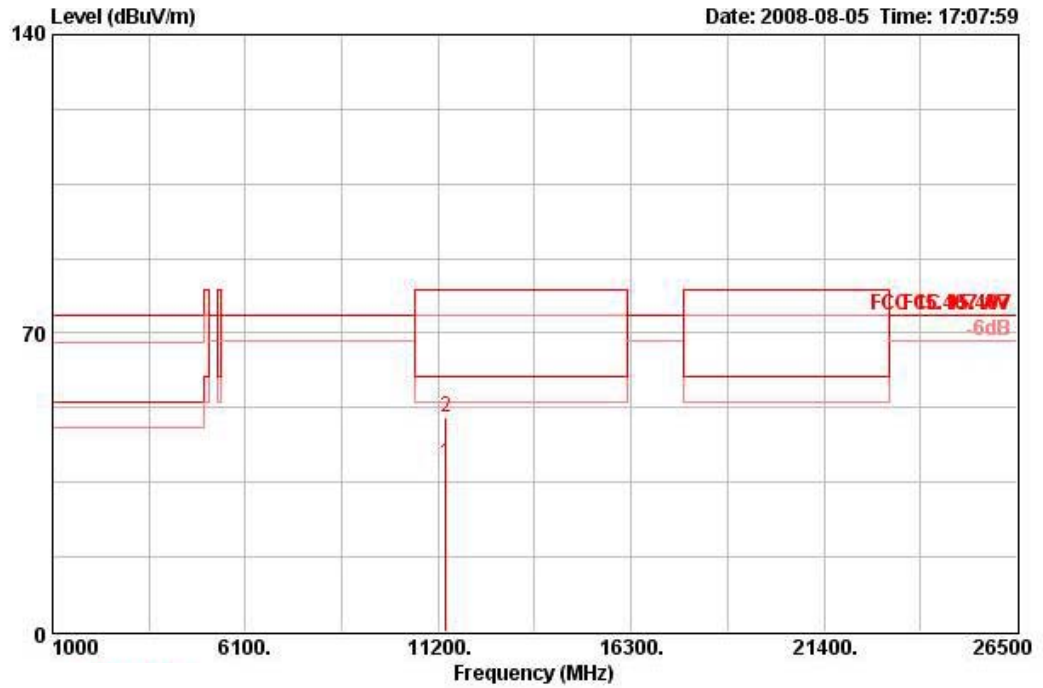

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11396.000	39.55	-20.45	60.00	29.15	38.68	6.67	34.95	AVERAGE	100	137	HORIZONTAL
2	11396.000	50.28	-29.72	80.00	39.87	38.68	6.67	34.95	PEAK	100	137	HORIZONTAL


Vertical

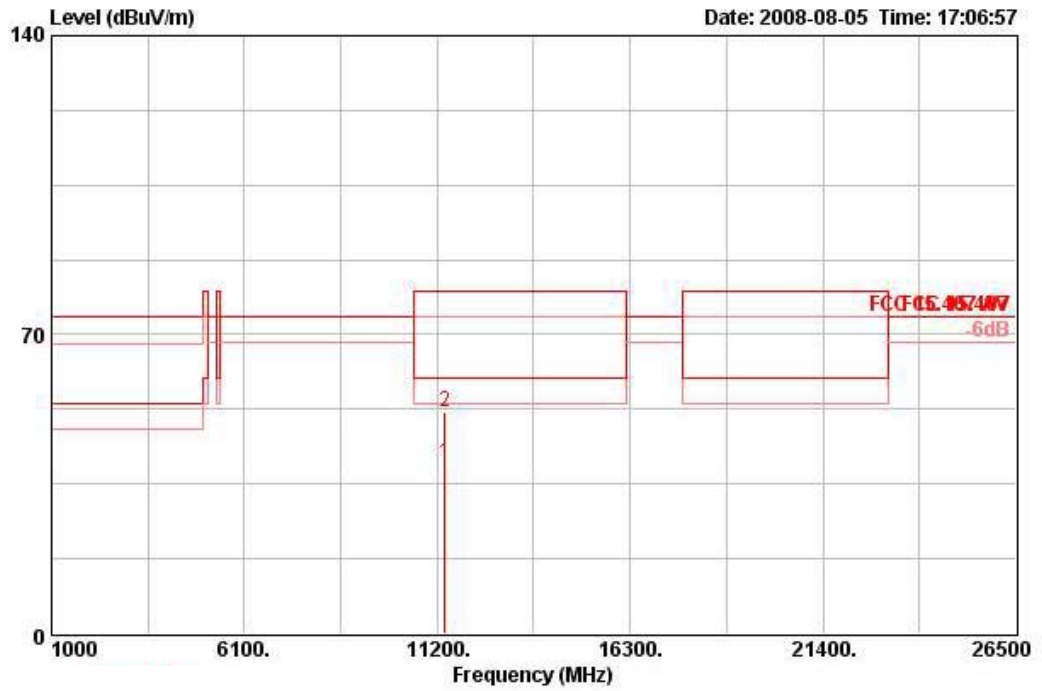

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11405.200	39.97	-20.03	60.00	29.55	38.70	6.67	34.95	AVERAGE	100	207	VERTICAL
2	11405.200	51.88	-28.12	80.00	41.45	38.70	6.67	34.95	PEAK	100	207	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 38 / Ant. 4

Horizontal

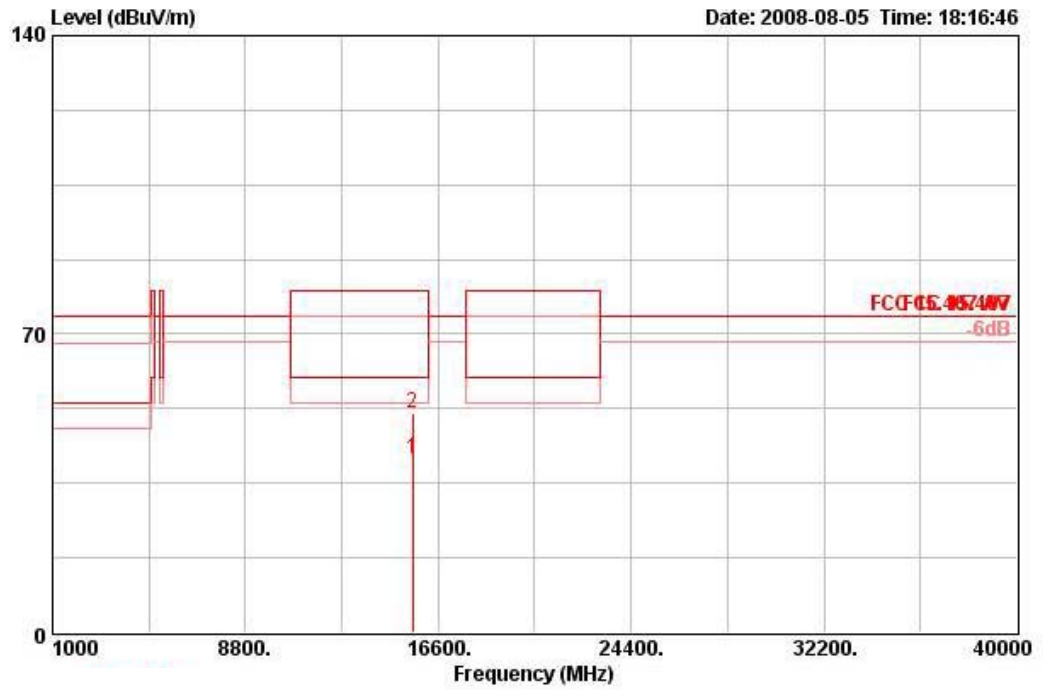

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15570.400	40.62	-19.38	60.00	32.09	37.63	6.19	35.29	AVERAGE	100	66	HORIZONTAL
2	15570.400	51.43	-28.57	80.00	42.90	37.63	6.19	35.29	PEAK	100	66	HORIZONTAL


Vertical

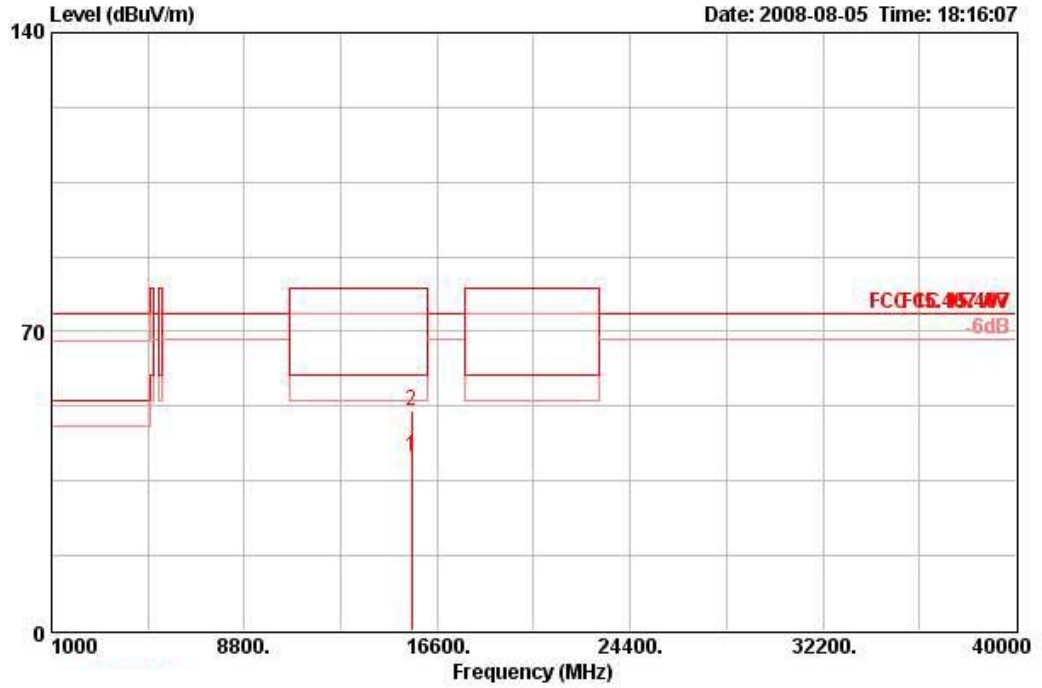

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15570.400	40.80	-19.20	60.00	32.25	37.65	6.19	35.29	AVERAGE	100	290	VERTICAL
2	15570.400	51.44	-28.56	80.00	42.89	37.65	6.19	35.29	PEAK	100	290	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS8 40MHz Ch 46 / Ant. 4

Horizontal

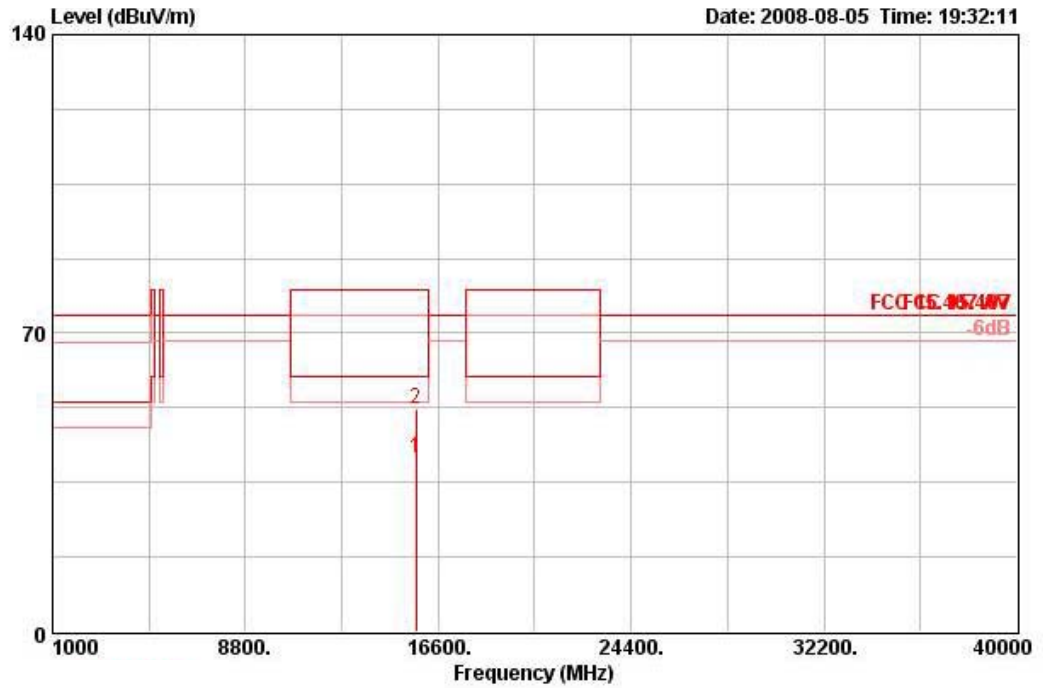

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15693.200	40.59	-19.41	60.00	32.30	37.49	6.13	35.34	AVERAGE	100	70	HORIZONTAL
2	15693.200	52.19	-27.81	80.00	43.90	37.49	6.13	35.34	PEAK	100	70	HORIZONTAL

Vertical

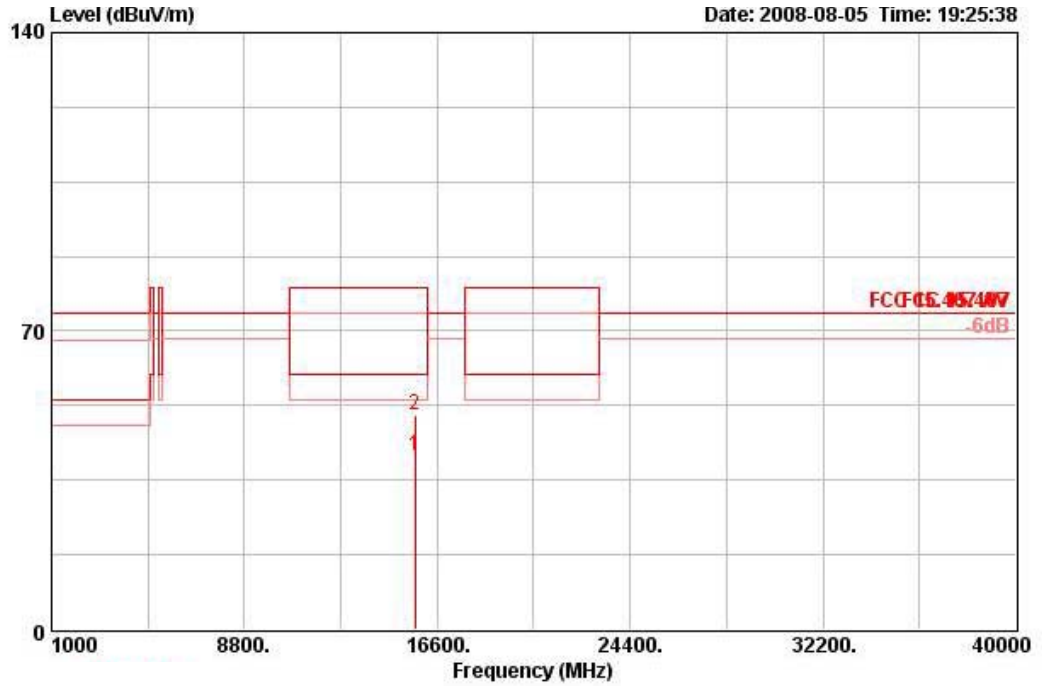

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	15693.200	40.62	-19.38	60.00	32.33	37.49	6.13	35.34	AVERAGE	100	278	VERTICAL
2	15693.200	50.27	-29.73	80.00	41.98	37.49	6.13	35.34	PEAK	100	278	VERTICAL