

EXHIBIT 6**INDEX OF SUBMITTED MEASURED DATA**

This exhibit contains the measured data for this equipment as follows:

EXHIBIT 6A – RF Power Output (Table)

EXHIBIT 6B – Audio Frequency Response

- 6B-1 –425.0125 MHz, 12.5 kHz Channel Spacing
- 6B-2 –425.0125 MHz, 25 kHz Channel Spacing (Not for FCC Review)
- 6B-3 –484.9875 MHz, 12.5 kHz Channel Spacing
- 6B-4 –484.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

EXHIBIT 6C – Audio Low Pass Filter Response

- 6C-1 –425.0125 MHz, 12.5 kHz Channel Spacing
- 6C-2 –425.0125 MHz, 25 kHz Channel Spacing (Not for FCC Review)

EXHIBIT 6D – Modulation Limiting

- 6D-1 –425.0125 MHz, 12.5 kHz Channel Spacing
- 6D-2 –425.0125 MHz, 25 kHz Channel Spacing (Not for FCC Review)
- 6D-3 –484.9875 MHz, 12.5 kHz Channel Spacing
- 6D-4 –484.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

EXHIBIT 6E – Occupied Bandwidth

- 6E-1 –425.0125 MHz, 12.5 kHz Channel Spacing (Analog Voice)
- 6E-2 –484.9875 MHz, 12.5 kHz Channel Spacing (Analog Voice)
- 6E-3 –425.0125 MHz, 25 kHz Channel Spacing (Analog Voice) (Not for FCC Review)
- 6E-4 –484.9875 MHz, 25 kHz Channel Spacing (Analog Voice) (Not for FCC Review)
- 6E-5 –425.0125 MHz, 12.5 kHz Channel Spacing (Digital Data)
- 6E-6 –484.9875 MHz, 12.5 kHz Channel Spacing (Digital Data)
- 6E-7 –425.0125 MHz, 12.5 kHz Channel Spacing (Digital Voice)
- 6E-8 –484.9875 MHz, 12.5 kHz Channel Spacing (Digital Voice)
- 6E-9 –425.0125 MHz, 12.5 kHz Channel Spacing (Digital TDMA)
- 6E-10 –484.9875 MHz, 12.5 kHz Channel Spacing (Digital TDMA)
- 6E-11 –425.0125 MHz, (Analog Voice Encryption)
- 6E-12 –484.9875 MHz, (Analog Voice Encryption)
- 6E-13 –425.0125 MHz, (Digital Voice Encryption)
- 6E-14 –484.9875 MHz, (Digital Voice Encryption)

EXHIBIT 6F – Conducted Spurious Emissions

- 6F-1 - High Power 450.0125 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-2 - High Power 484.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-3 - High Power 511.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-4 - High Power 519.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-5 - Low Power 450.0125 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-6 - Low Power 484.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-7 - Low Power 511.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-8 - Low Power 519.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-9 - Low Power 380.0125 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-10 - Low Power 406.2 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-11 - Low Power 425.0125 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-12 - Low Power 469.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-13 - High Power 380.0125 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-14 - High Power 406.2 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-15 - High Power 425.0125 MHz, 12.5 kHz Channel Spacing (Analog Mode)
- 6F-16 - High Power 469.9875 MHz, 12.5 kHz Channel Spacing (Analog Mode)

6F-17 - High Power 450.0125 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-18 - High Power 484.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-19 - High Power 511.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-20 - High Power 519.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-21 - Low Power 450.0125 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-22 - Low Power 484.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-23 - Low Power 511.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-24 - Low Power 519.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-25 - Low Power 380.0125 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-26 - Low Power 406.2 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-27 - Low Power 425.0125 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-28 - Low Power 469.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-29 - High Power 380.0125 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-30 - High Power 406.2 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-31 - High Power 425.0125 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-32 - High Power 469.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6F-33 - High Power 450.0125 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-34 - High Power 484.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-35 - High Power 511.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-36 - High Power 519.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-37 - Low Power 450.0125 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-38 - Low Power 484.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-39 - Low Power 511.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-40 - Low Power 519.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-41 - Low Power 380.0125 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-42 - Low Power 406.2 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-43 - Low Power 425.0125 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-44 - Low Power 469.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-45 - High Power 380.0125 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-46 - High Power 406.2 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-47 - High Power 425.0125 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6F-48 - High Power 469.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)

EXHIBIT 6G – Radiated Spurious Emissions

6G-1 - High Power 450.0125 & 484.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-2 - High Power 511.9875 & 519.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-3 - Low Power 450.0125 & 484.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-4 - Low Power 511.9875 & 519.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-5 - High Power 380.0125 & 406.2 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-6 - High Power 425.0125 & 469.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-7 - Low Power 380.0125 & 406.2 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-8 - Low Power 425.0125 & 469.9875 MHz, 25.0 kHz Channel Spacing (Not for FCC Review)
6G-9 - High Power 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-10 - High Power 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-11 - Low Power 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-12 - Low Power 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-13 - High Power 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-14 - High Power 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-15 - Low Power 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-16 - Low Power 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing (Digital Mode)
6G-17 - High Power 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-18 - High Power 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-19 - Low Power 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-20 - Low Power 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-21 - High Power 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-22 - High Power 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-23 - Low Power 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing (TDMA Mode)
6G-24 - Low Power 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing (TDMA Mode)

EXHIBIT 6H – Frequency Stability

- 6H-1 – 425.0125 MHz vs. Temperature
- 6H-2 – 484.9875 MHz vs. Temperature
- 6H-3 – 425.0125 MHz vs. Supply Voltage
- 6H-4 – 484.9875 MHz vs. Supply Voltage

EXHIBIT 6I – Transient Frequency Behavior

- 6J-1 – 484.9875 MHz, 25 kHz Channel Spacing – Transmitter On (Not for FCC Review)
- 6J-2 – 484.9875 MHz, 12.5 kHz Channel Spacing – Transmitter On
- 6J-3 – 484.9875 MHz, 12.5 kHz Channel Spacing – Transmitter Off
- 6J-4 – 484.9875 MHz, 25 kHz Channel Spacing – Transmitter Off (Not for FCC Review)
- 6J-5 – 425.0125 MHz, 25 kHz Channel Spacing – Transmitter On (Not for FCC Review)
- 6J-6 – 425.0125 MHz, 25 kHz Channel Spacing – Transmitter Off (Not for FCC Review)
- 6J-7 – 425.0125 MHz, 12.5 kHz Channel Spacing – Transmitter On
- 6J-8 – 425.0125 MHz, 12.5 kHz Channel Spacing – Transmitter Off

* The test data is re-used and taken from FCC ID: AZ492FT4894 and AZ492FT4896 except radiated spurious emissions. Radiated spurious emissions data is taken on the actual FCC ID: AZ492FT4904.

EXHIBIT 6A**RF Conducted Power Output Data -- Pursuant 47 CFR 2.1046(a), 2.1033(c) (6), 2.1033(c) (7) and 2.1033(c) (8)**

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device (Q5518).

Frequency = 380.0125 MHz:

Output RF power	47.7 Watts
DC Voltage	13.6 Volts
DC Current	8.68 Amps

Frequency = 380.0125 MHz:

Output RF power	4.00 Watts
DC Voltage	13.6 Volts
DC Current	2.97 Amps

Frequency = 406.2 MHz:

Output RF power	47.7 Watts
DC Voltage	13.6 Volts
DC Current	8.07 Amps

Frequency = 406.2 MHz:

Output RF power	4.01 Watts
DC Voltage	13.6 Volts
DC Current	2.81 Amps

Frequency = 425.0125MHz:

Output RF power	47.5 Watts
DC Voltage	13.6 Volts
DC Current	7.52 Amps

Frequency = 425.0125MHz:

Output RF power	4.01 Watts
DC Voltage	13.6 Volts
DC Current	2.65 Amps

Frequency = 469.9875MHz:

Output RF power	47.6 Watts
DC Voltage	13.6 Volts
DC Current	8.07 Amps

Frequency = 469.9875MHz:

Output RF power	3.99 Watts
DC Voltage	13.6 Volts
DC Current	2.87 Amps

The RF power output was measured with the indicated voltage applied to and current into the final RF amplifying device (Q6533).

Frequency = 450.0125 MHz:

Output RF power	54 Watts
DC Voltage	13.6 Volts
DC Current	7.87 Amps

Frequency = 450.0125 MHz:

Output RF power	4 Watts
DC Voltage	13.6 Volts
DC Current	1.91 Amps

Frequency = 484.9875 MHz

Output RF power	54 Watts
DC Voltage	13.6 Volts
DC Current	7.79 Amps

Frequency = 484.9875 MHz:

Output RF power	4 Watts
DC Voltage	13.6 Volts
DC Current	2.00 Amps

Frequency = 511.9875 MHz:

Output RF power	48 Watts
DC Voltage	13.6 Volts
DC Current	7.44 Amps

Frequency = 511.9875 MHz:


Output RF power	4 Watts
DC Voltage	13.6 Volts
DC Current	2.06 Amps

Frequency = 519.9875 MHz:

Output RF power	30 Watts
DC Voltage	13.6 Volts
DC Current	5.32 Amps

Frequency = 519.9875 MHz:

Output RF power	4 Watts
DC Voltage	13.6 Volts
DC Current	2.01 Amps

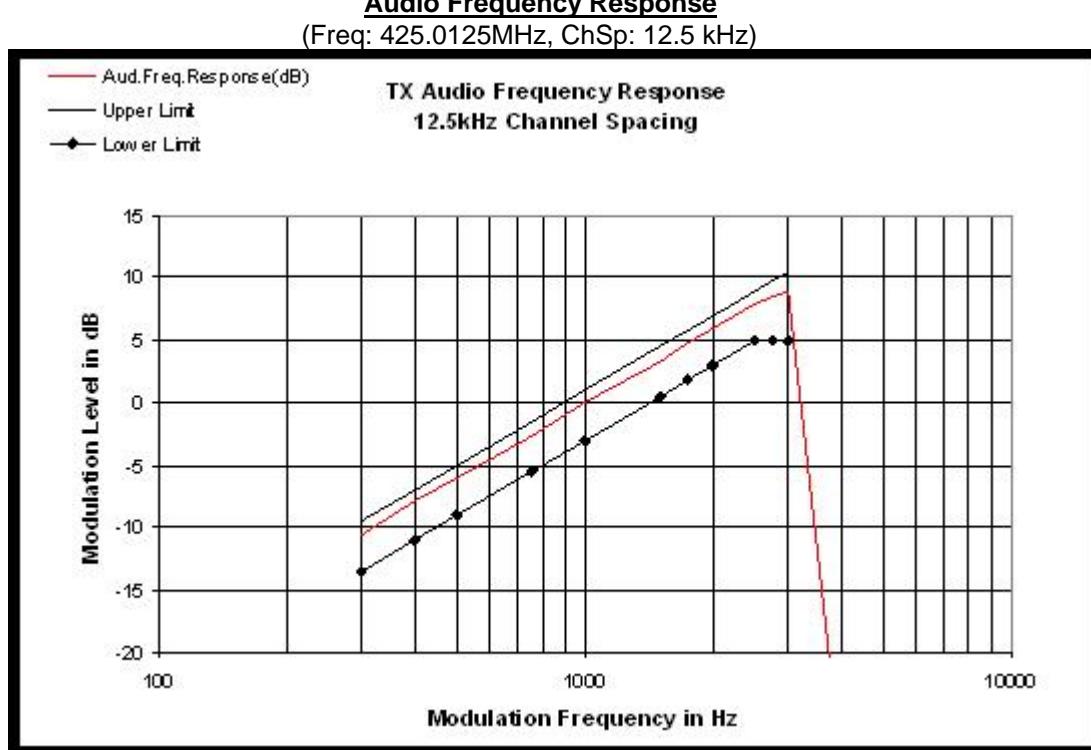EXHIBIT 6B**Transmit Audio Response -- Pursuant 47 CFR 2.1047 and 2.1033(c) (13)****Figure 6B-1: 12.5 kHz Channel Spacing, 425.0125 MHz**

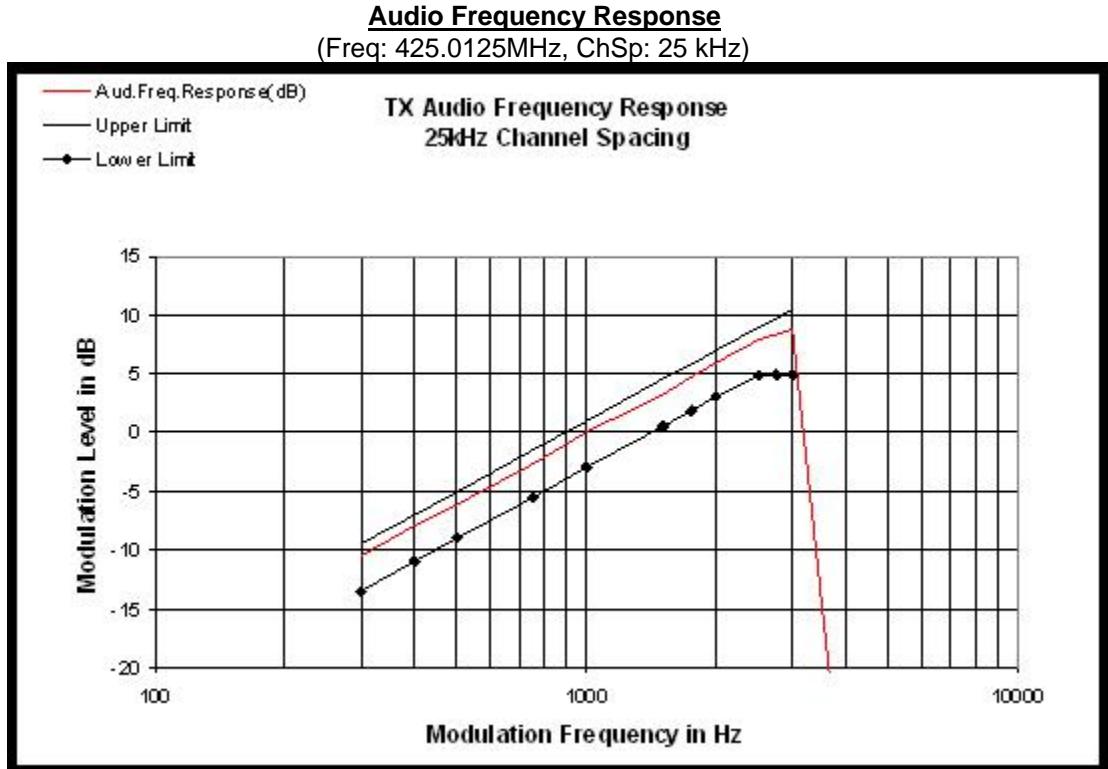


Figure 6B-2: 25 kHz Channel Spacing, 425.0125 MHz (Not for FCC Review)

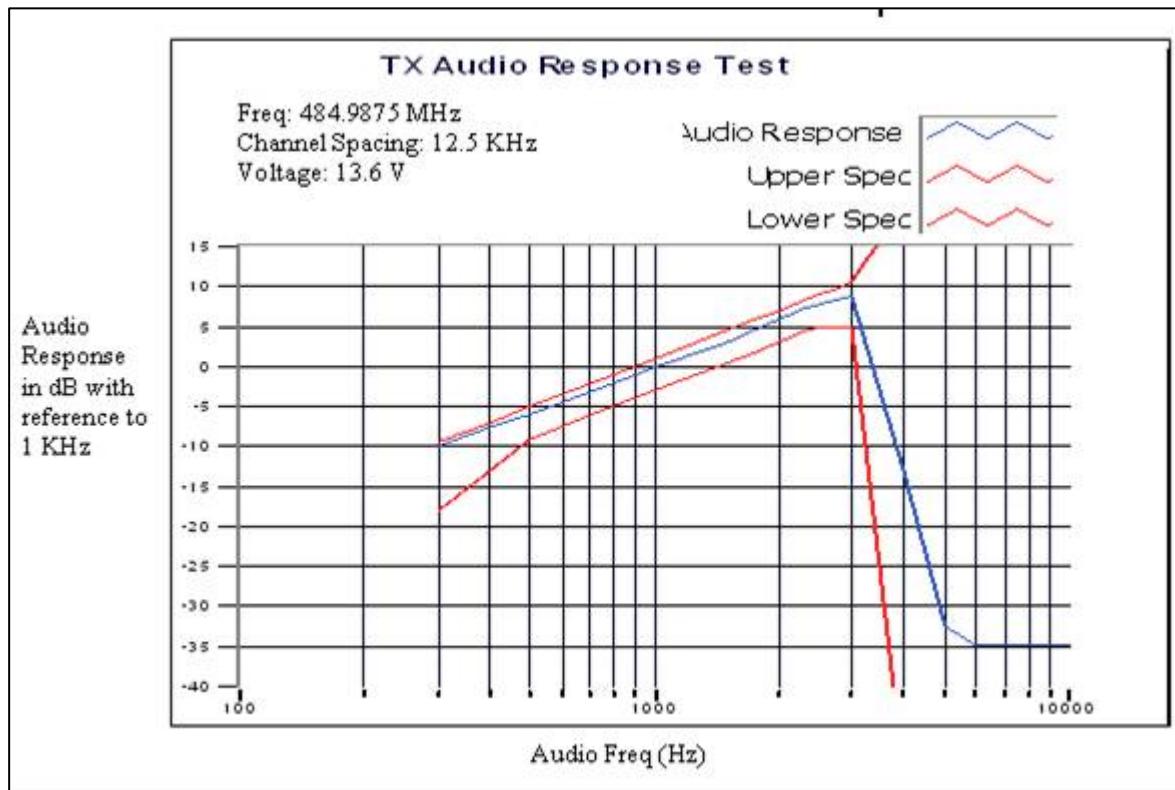


Figure 6B-3: 12.5 kHz Channel Spacing, 484.9875 MHz

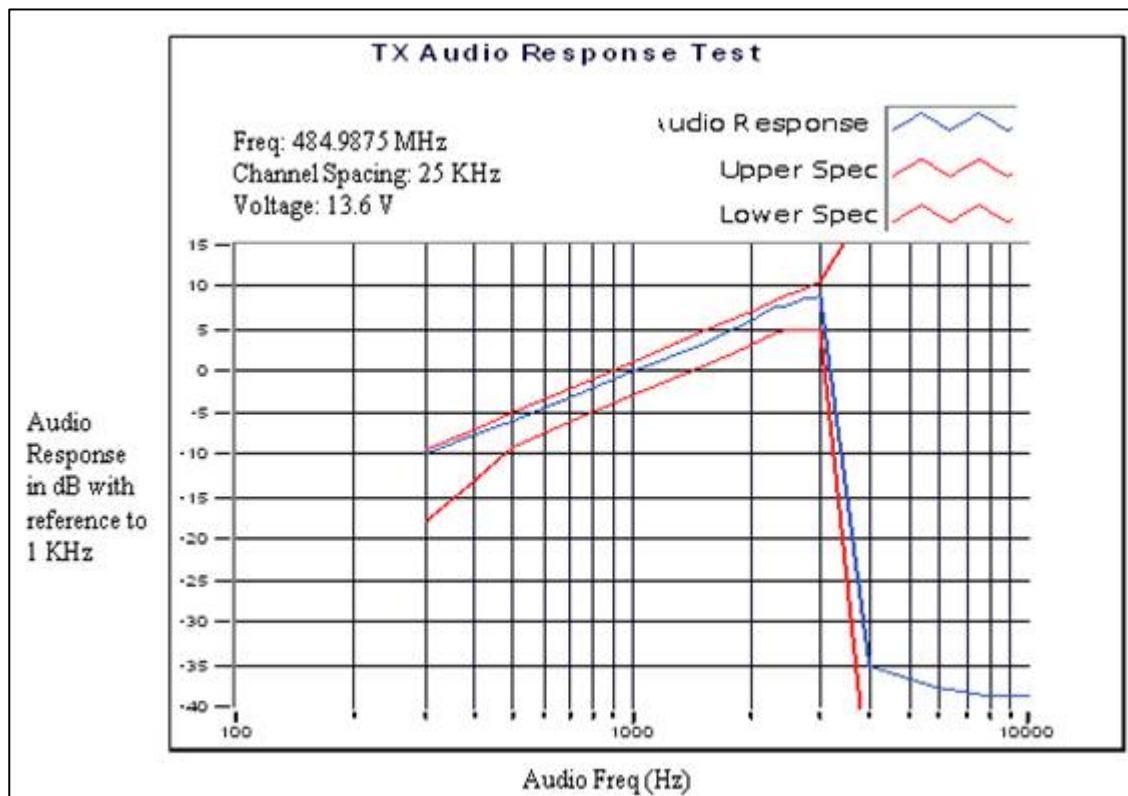


Figure 6B-4: 25 kHz Channel Spacing, 484.9875 MHz (Not for FCC Review)

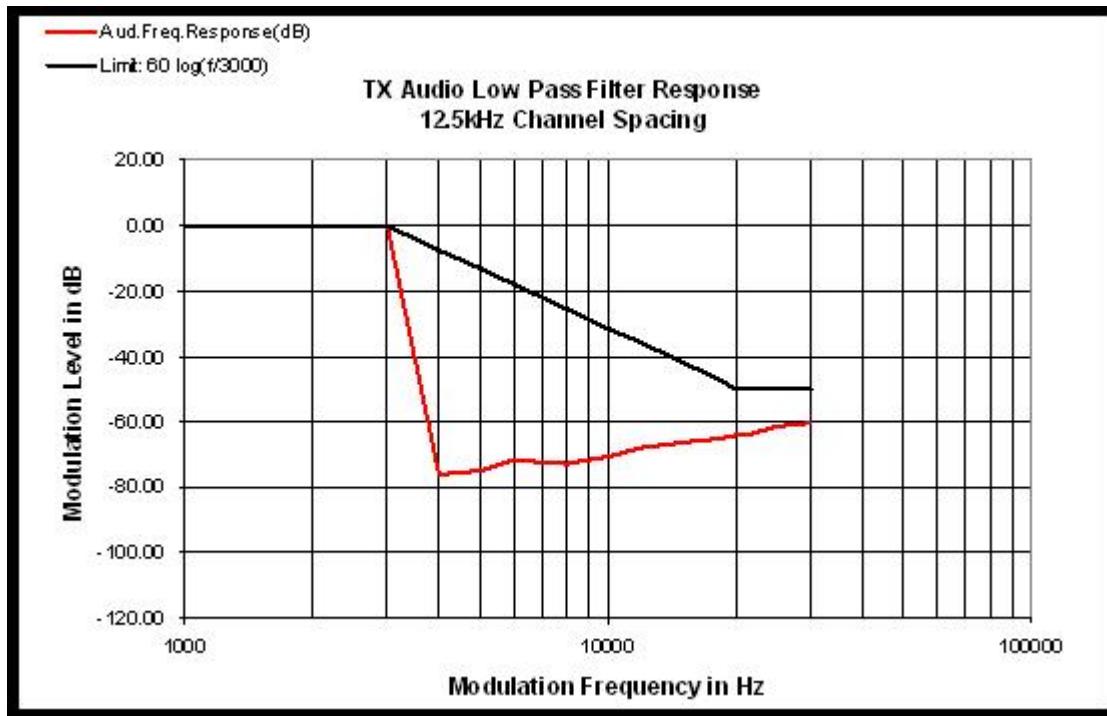
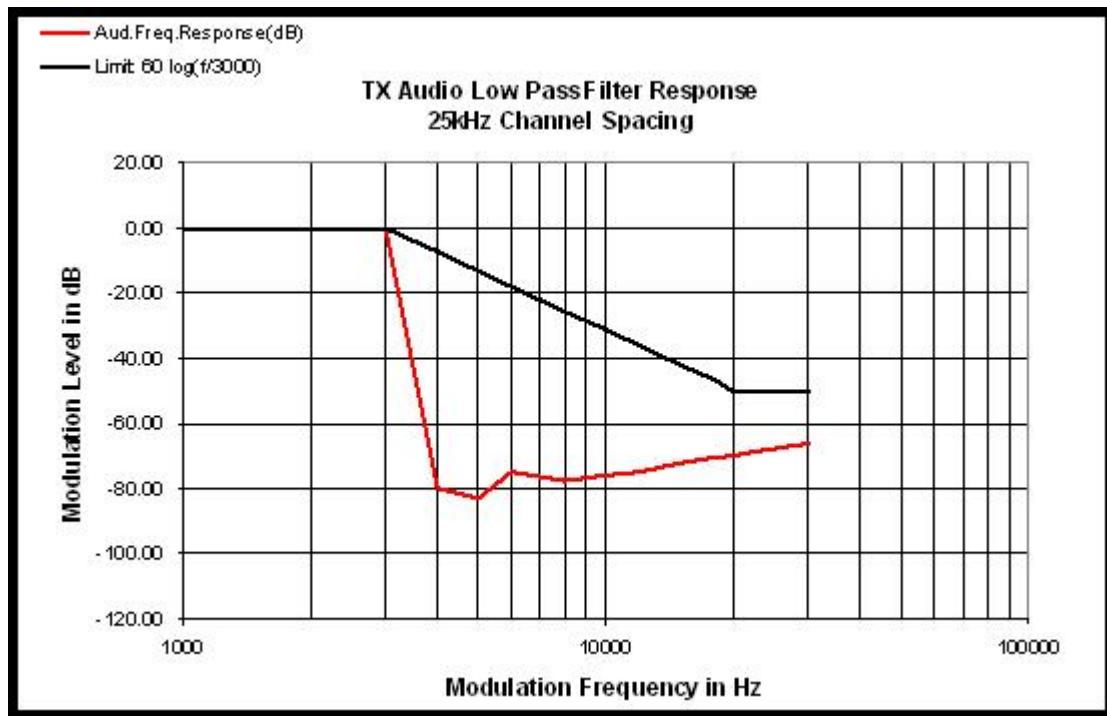
EXHIBIT 6C**Audio Low Pass Filter Response -- Pursuant 47 CFR 2.1047 and 2.1033(c) (13)****Figure 6C-1: 12.5 kHz Channel Spacing, 425.0125 MHz****Figure 6C-2: 25 kHz Channel Spacing, 425.0125 MHz (Not for FCC Review)**

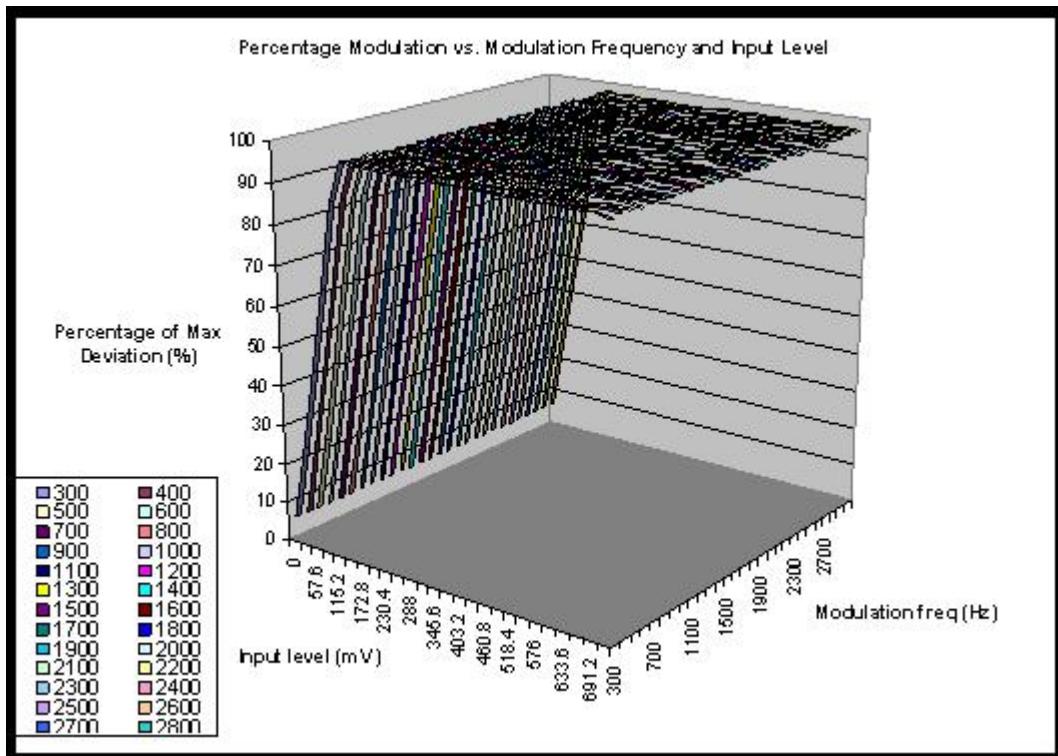
EXHIBIT 6D**Modulation Limiting -- Pursuant 47 CFR 2.1047 and 2.1033(c) (13)**

Figure 6D-1: The Percentage of Max. Deviation on the "Z" axis is referenced to 2.5 kHz for 12.5 kHz bandwidth

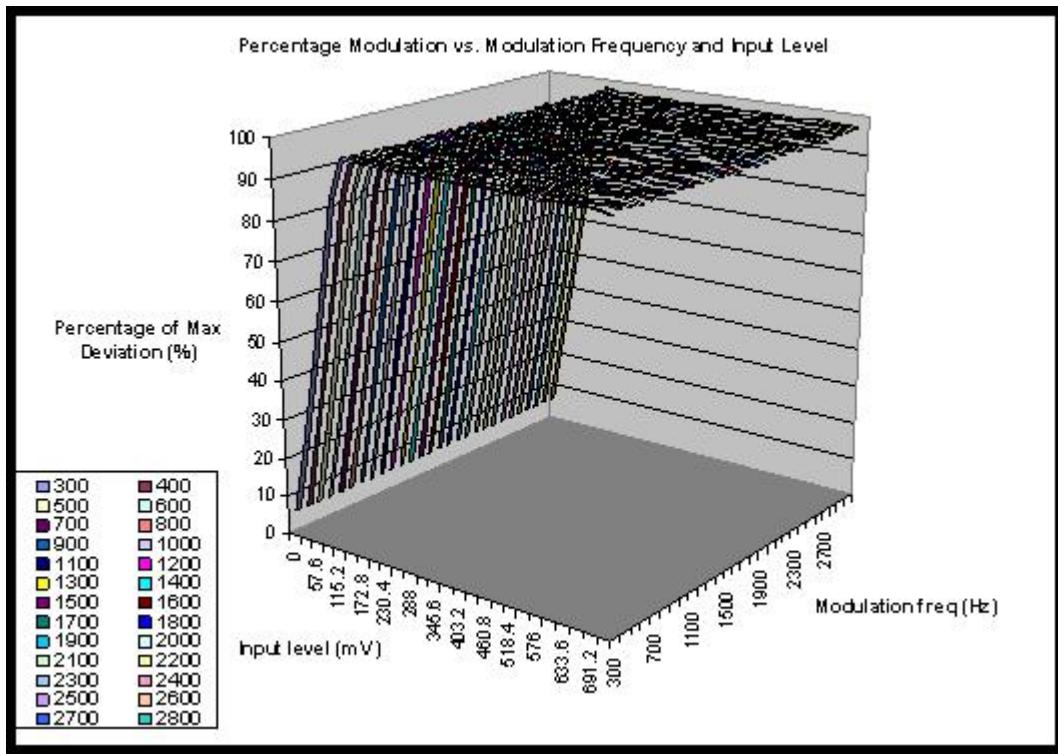


Figure 6D-2: The Percentage of Max. Deviation on the "Z" axis is referenced to 5.0 kHz for 25 kHz bandwidth (Not for FCC Review)

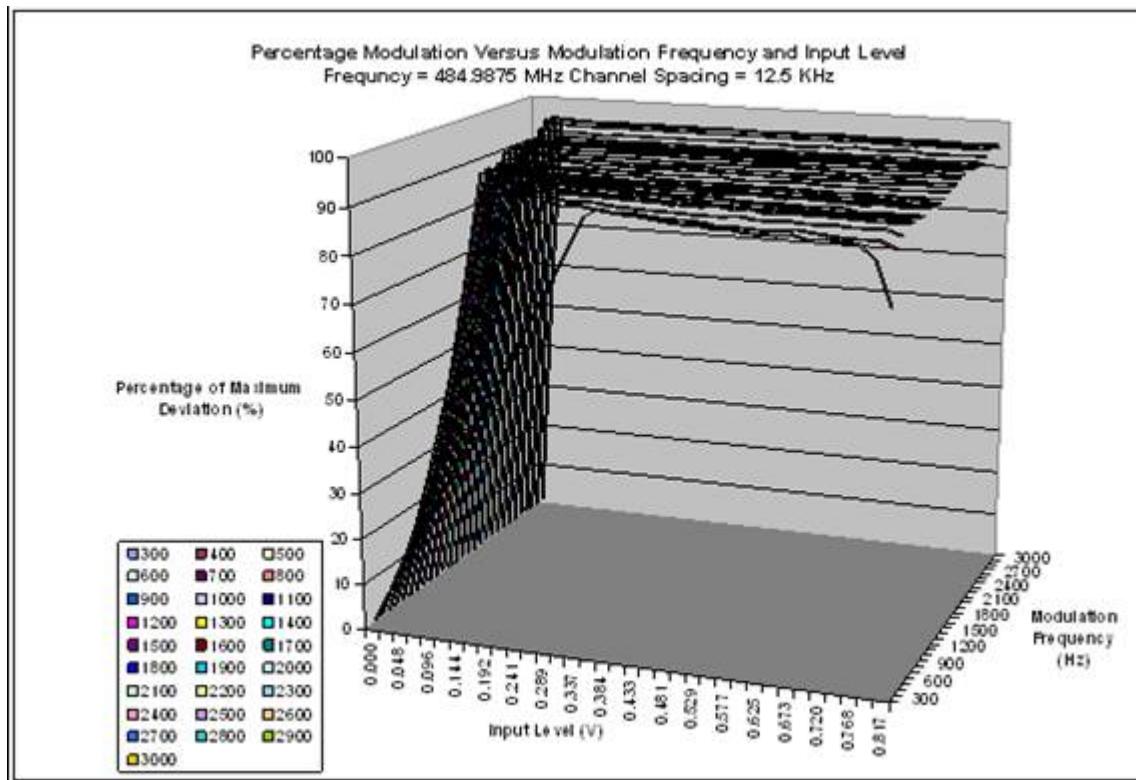


Figure 6D-3: The Percentage of Max. Deviation on the "Z" axis is referenced to 2.5 kHz for 12.5 kHz bandwidth

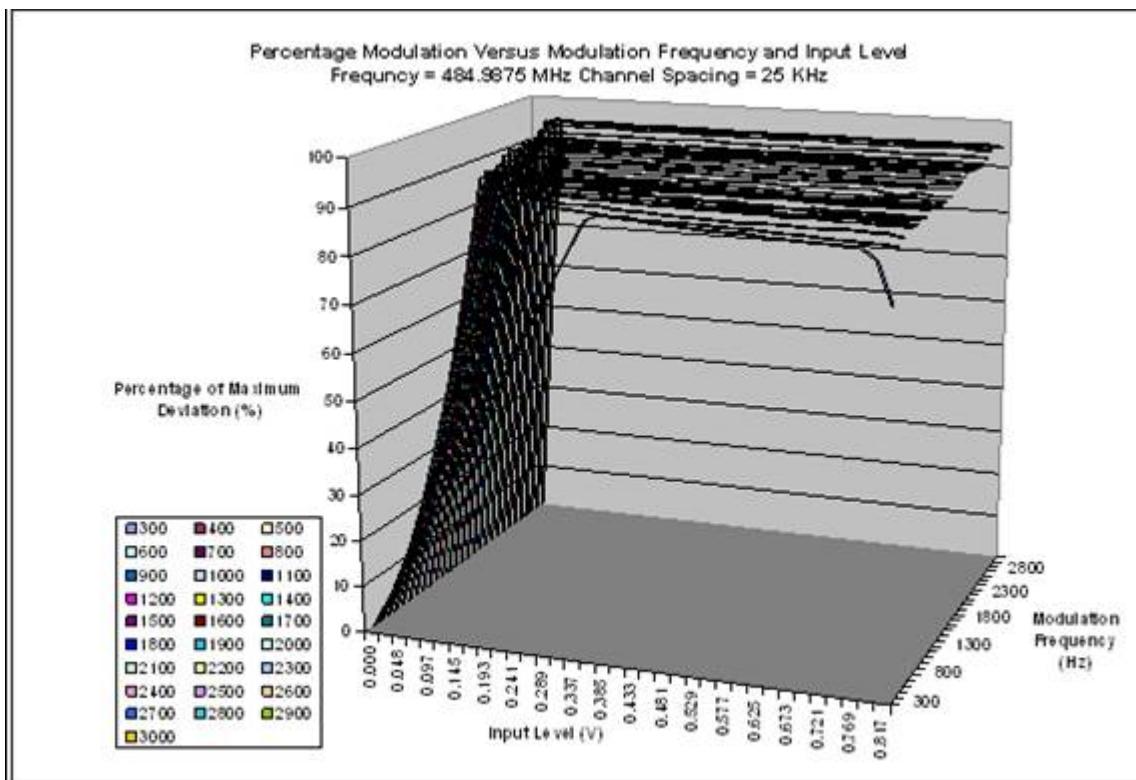


Figure 6D-4: The Percentage of Max. Deviation on the "Z" axis is referenced to 5.0 kHz for 25 kHz bandwidth (Not for FCC Review)

EXHIBIT 6E

Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691

Carson's Rule for FM modulation is utilized to compute the bandwidth shown in the FCC emission designator. Carson's Rule is:

$$BW = 2 * (M + D) \quad \text{where:} \quad \begin{aligned} BW &= \text{Bandwidth} \\ M &= \text{Maximum modulating frequency} \\ D &= \text{Deviation} \end{aligned}$$

EXHIBIT 6E-1

Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \Rightarrow 11K0$$

F3E portion of the designator indicates voice.

Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

EXHIBIT 6E-2

Standard Audio Modulation (25 kHz Channelization, Analog Voice):

Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} \Rightarrow 16K0$$

F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E.

EXHIBIT 6E-3

Digital (12.5 kHz Channelization, Digital Data):

Emission Designator 8K10F1D

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1D portion of the designator indicates digital data.

Therefore, the entire designator for 12.5 kHz channelization digital data is 8K10F1D.

EXHIBIT 6E-4

Digital (12.5 kHz Channelization, Digital Voice):

Emission Designator 8K10F1E

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz. Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 12.5 kHz channelization digital voice is 8K10F1E.

EXHIBIT 6E-5

Digital (12.5 kHz Channelization, Digital TDMA):

Emission Designator (6.25e kHz) 8K10F1W

The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10 kHz Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

F1W portion of the designator indicates digital TDMA.

Therefore, the entire designator for 12.5 kHz channelization digital TDMA is 8K10F1W.

EXHIBIT 6E-6

Digital Modulation (20 kHz Channelization, Digital Voice with Encryption):

Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6 kHz with a 4 kHz deviation.

$$BW = 2(M+D) = 2*(6 \text{ kHz} + 4 \text{ kHz}) = 20 \text{ kHz} \Rightarrow 20K0$$

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 20 kHz channelization analog voice is 20K0F1E

EXHIBIT 6E-7

Securenet Mode (20.0 kHz Channelization, Analog Voice with Encryption):

Emission Designator 20K0F1E

In this case, the maximum modulating frequency is 6.0 kHz with a 4.0 kHz deviation.

$$BW = 2(M+D) = 2*(6.0 \text{ kHz} + 4.0 \text{ kHz}) = 20 \text{ kHz} \Rightarrow 20K0$$

F1E portion of the designator indicates digital voice.

Therefore, the entire designator for 20.0 kHz channelization securenet mode (analog voice with encryption) is 20K0F1E.


Note: The 90.203(j) efficiency standard for "F1D" emission is met by sending 2 bits at a time, at a rate of 4800 symbols/second. This yields 9600 bits/second, which is achieved using the modulation technique described in the note below. Modulation results from one of the digital 4-level standard symbol patterns applied to the modulation

at a rate of 9600 bits/second. The modulation technique is 4-level FM. The information bits are commonly represented by a symbol that corresponds to one of 4 levels of FM deviation according to the following table.

<u>Information Bits</u>	<u>Symbol</u>	<u>C4FM Deviation</u>
01	+3	+1.8 kHz
00	+1	+0.6 kHz
10	-1	-0.6 kHz
11	-3	-1.8 kHz

For example, an 8-bit binary pattern of 0010 1101 would be sent as symbols +1, -1, -3, +3, which would cause a modulation signal (Frequency-Shift-Keyed) of +1.8 kHz, -600 Hz, -1.8 kHz, and +600 Hz. This results in 9600 bits/second of information being sent on a 12.5 kHz channel, which is the equivalent of 4800 bits/second per 6.25 kHz.

Note: The "F1D", "F1E" and "F1W" signal parameters are described as follows: The modulation is 4-level FSK with +/-600 Hz and +/-1.8 kHz shifting (+/-600 Hz and +/-1.8 kHz are the 4 distinct levels of signals). The digital voice test pattern is created by a 2500 Hz sine wave modulated at a level that is 16 dB above that required to produce 50% deviation at the radio output. The digital data test signal is generated by an internally generated pseudo random test pattern based on ITU-T 0.153 (formally CCITT V.52).

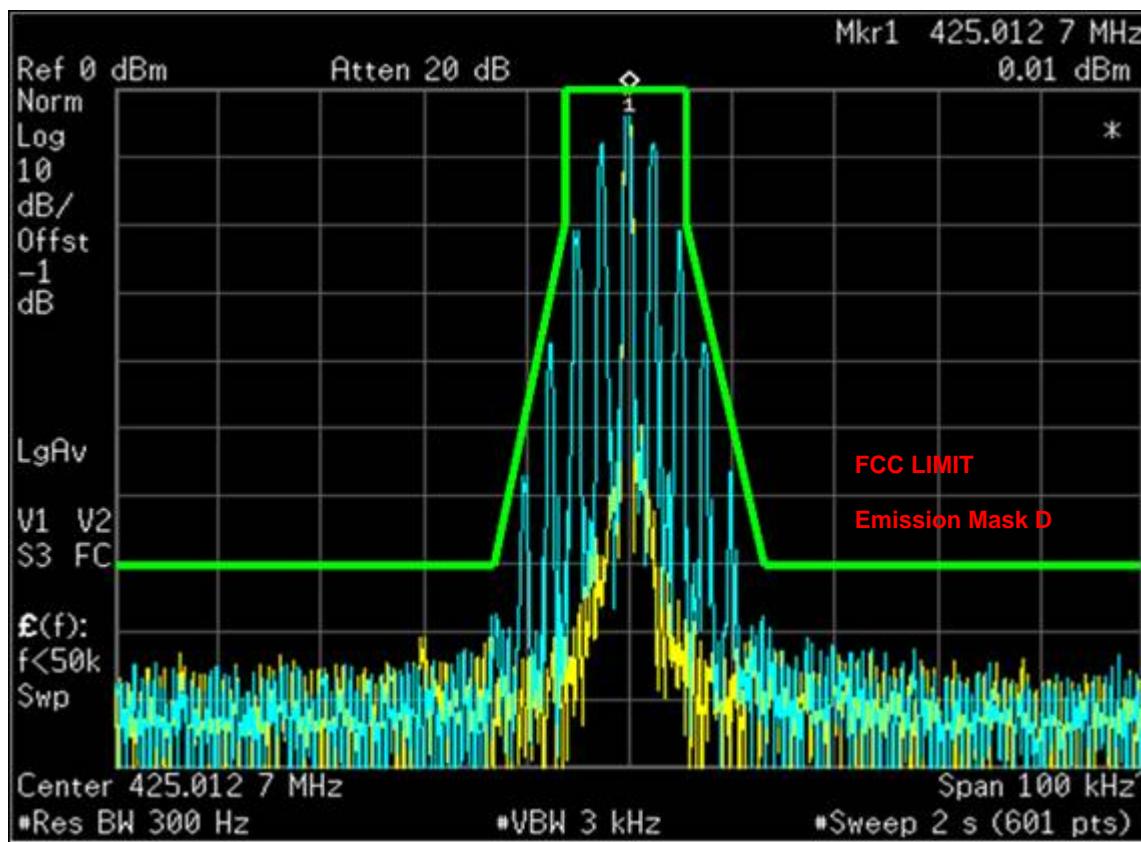EXHIBIT 6E**Occupied Bandwidth Data -- Pursuant 47 CFR 2.1049, 90.210(g) and 90.691****Figure 6E-1: 12.5 kHz Channel Spacing, 425.0125 MHz, Analog Voice, Mask D 11K0F3E**

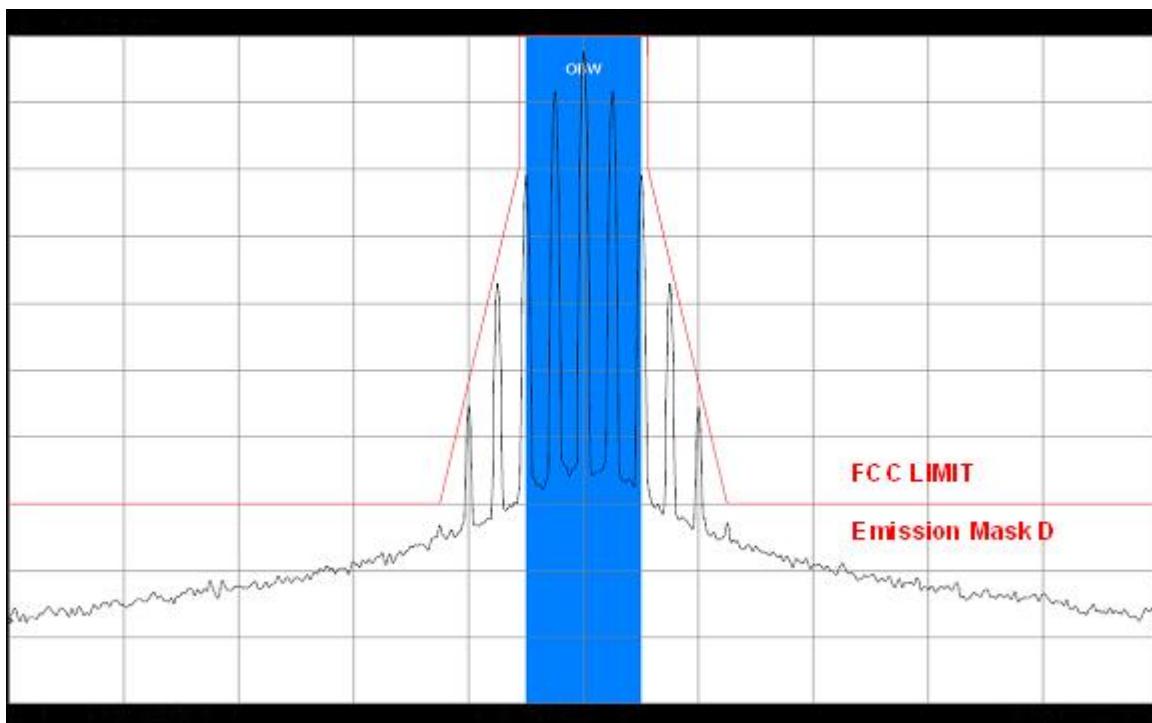


Figure 6E-2: 12.5 kHz Channel Spacing, 484.9875 MHz, Analog Voice, Mask D 11K0F3E

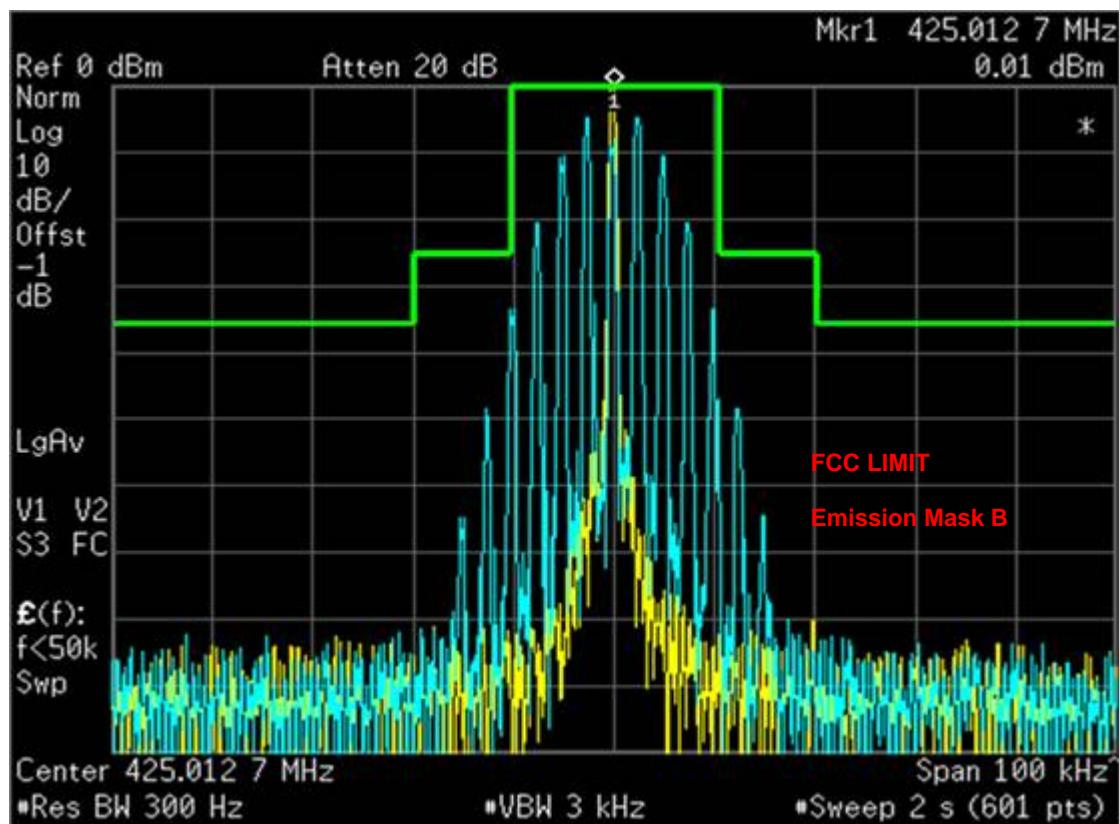


Figure 6E-3: 25 kHz Channel Spacing, 425.0125 MHz, Analog Voice, Mask B 16K0F3E (Not for FCC Review)

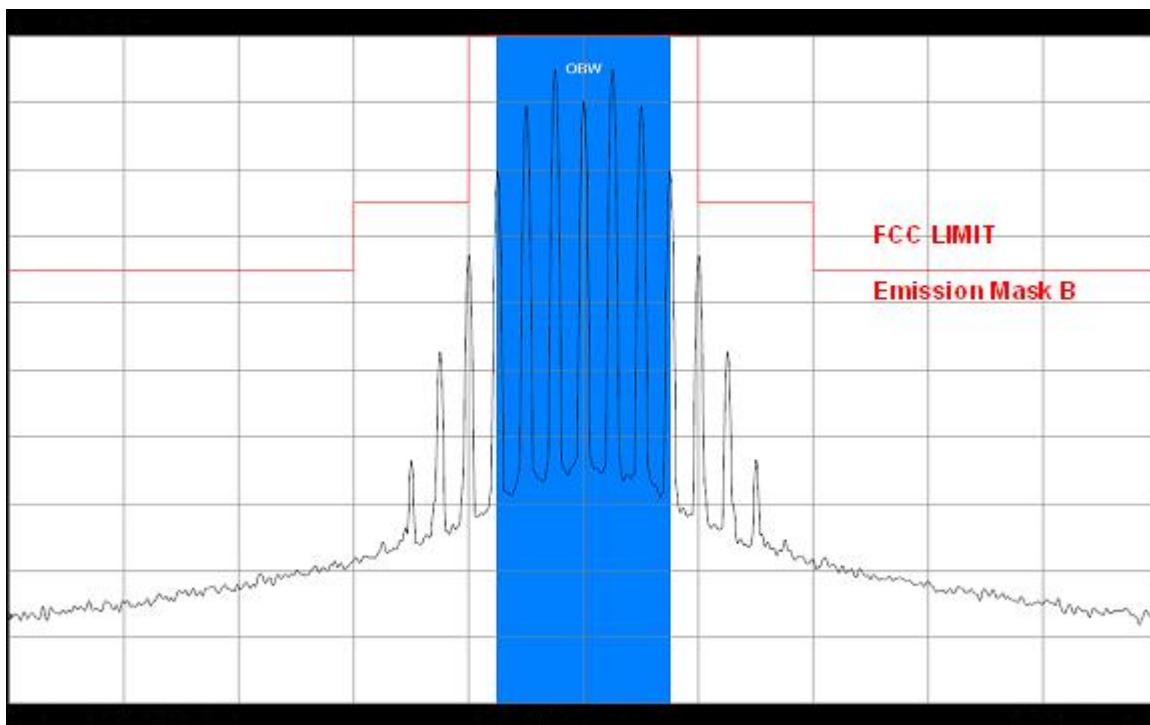


Figure 6E-4: 25 kHz Channel Spacing, 484.9875 MHz, Analog Voice, Mask B 16K0F3E (Not for FCC Review)

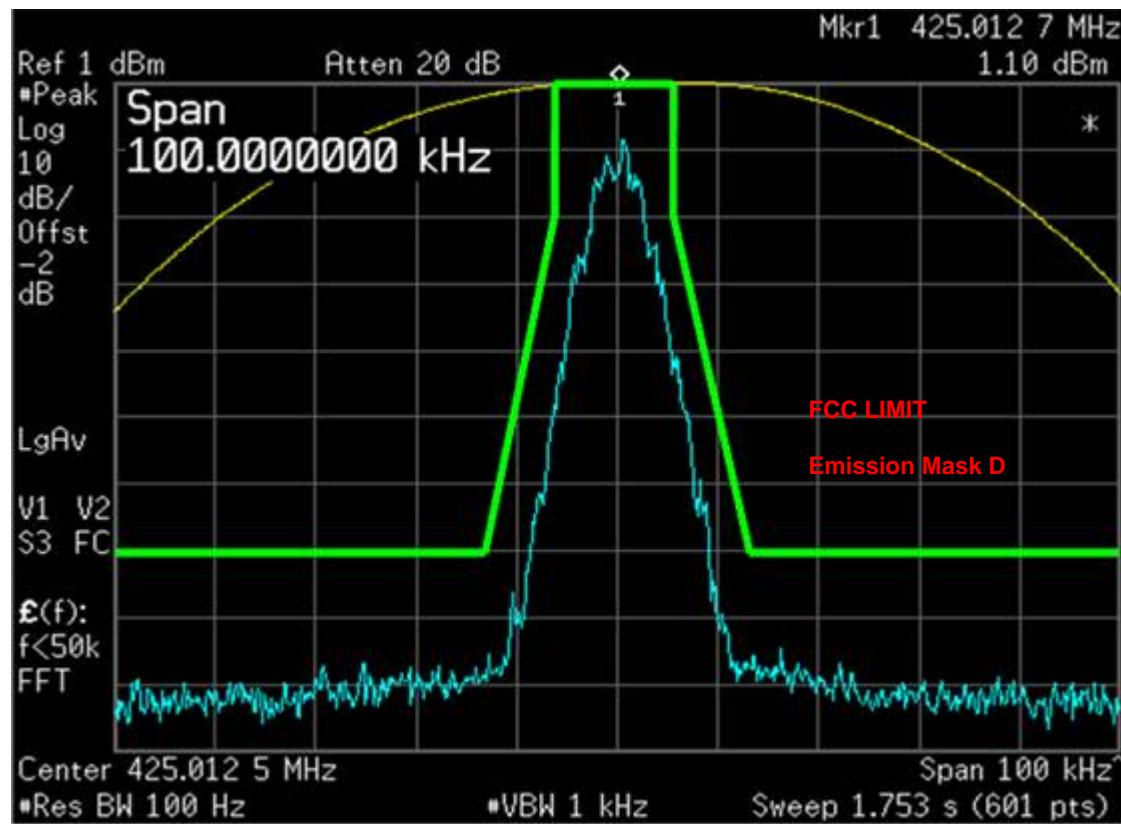


Figure 6E-5: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Data, Mask D 8K10F1D

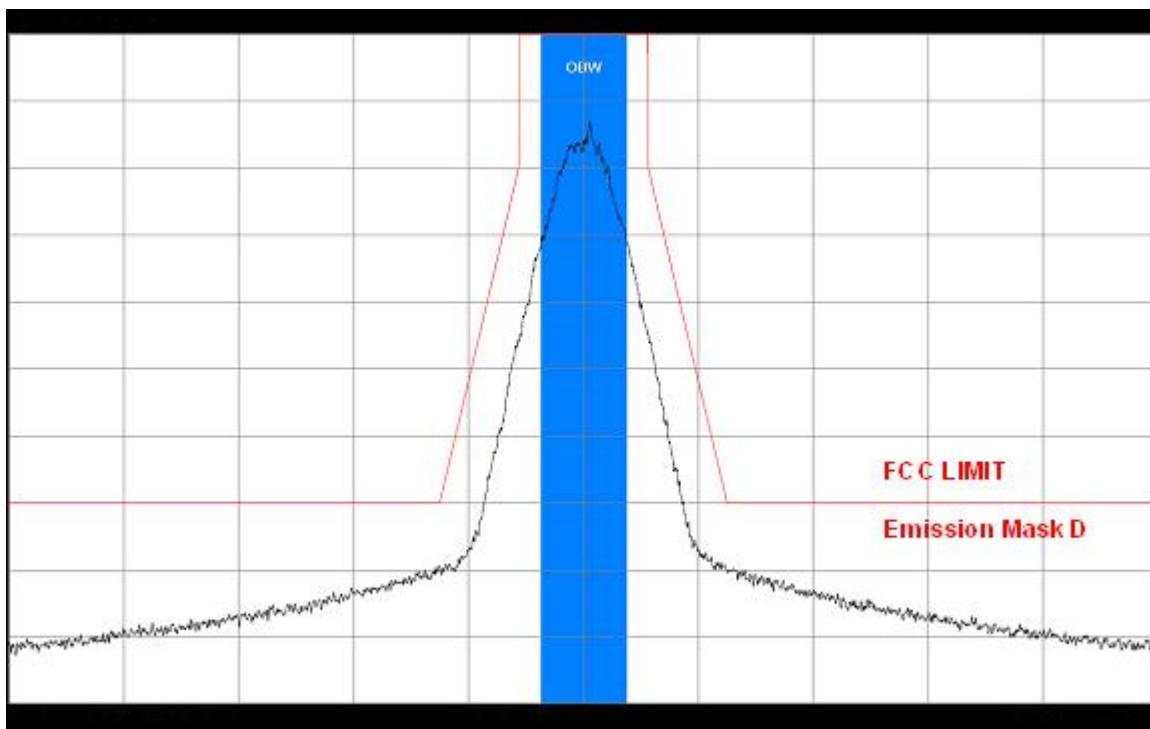


Figure 6E-6: 12.5 kHz Channel Spacing, 484.9875 MHz, Digital Data, Mask D 8K10F1D

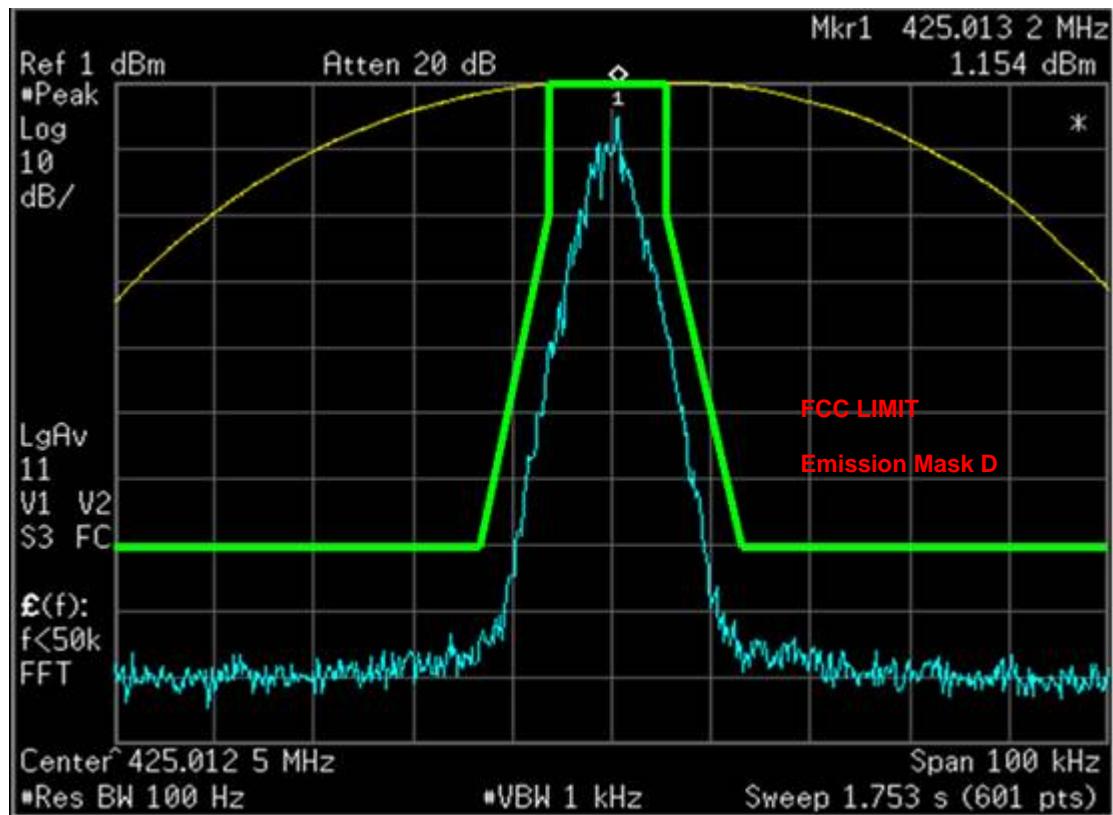


Figure 6E-7: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Voice, Mask D 8K10F1E

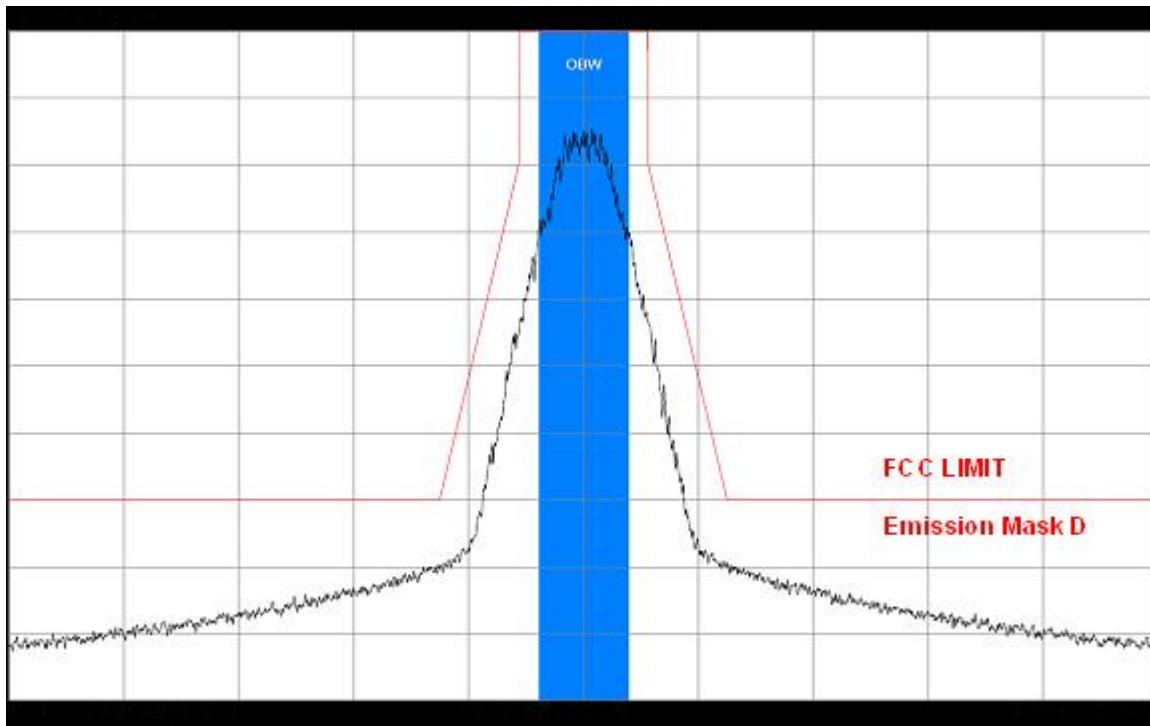


Figure 6E-8: 12.5 kHz Channel Spacing, 484.9875 MHz, Digital Voice, Mask D 8K10F1E

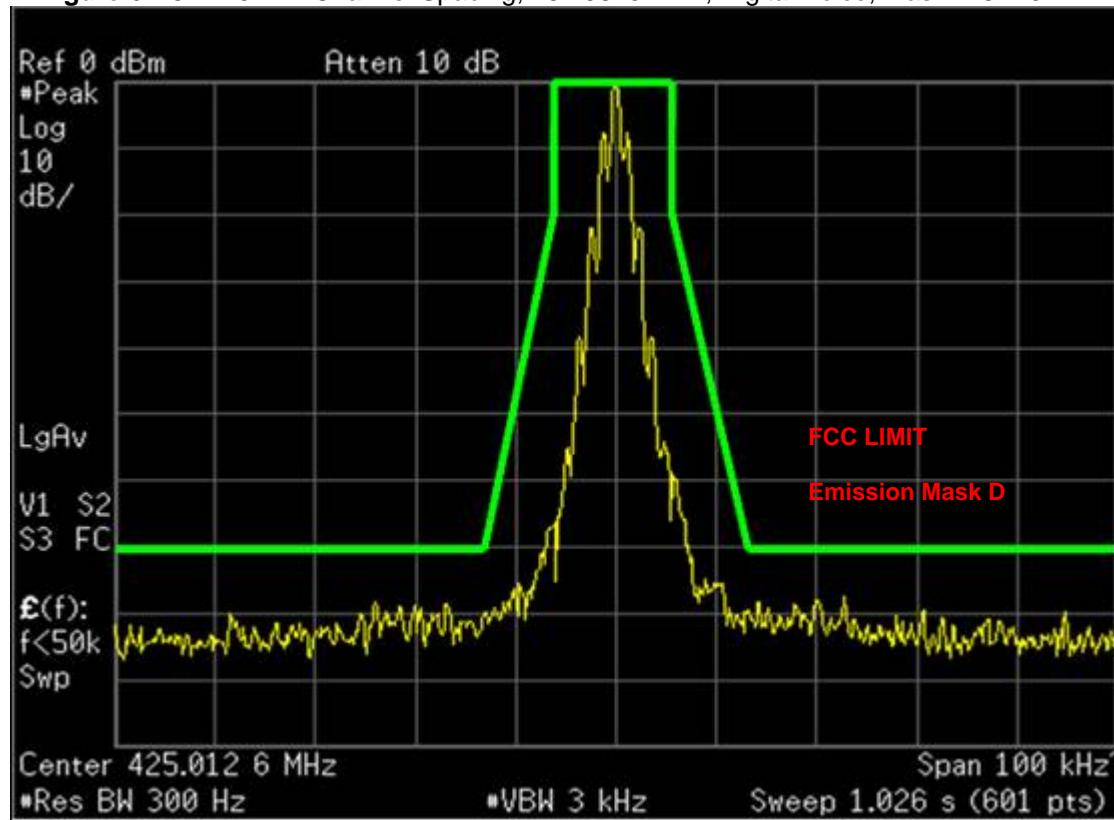


Figure 6E-9: 12.5 kHz Channel Spacing, 425.0125 MHz, 6.25e TDMA, Mask D 8K10F1W

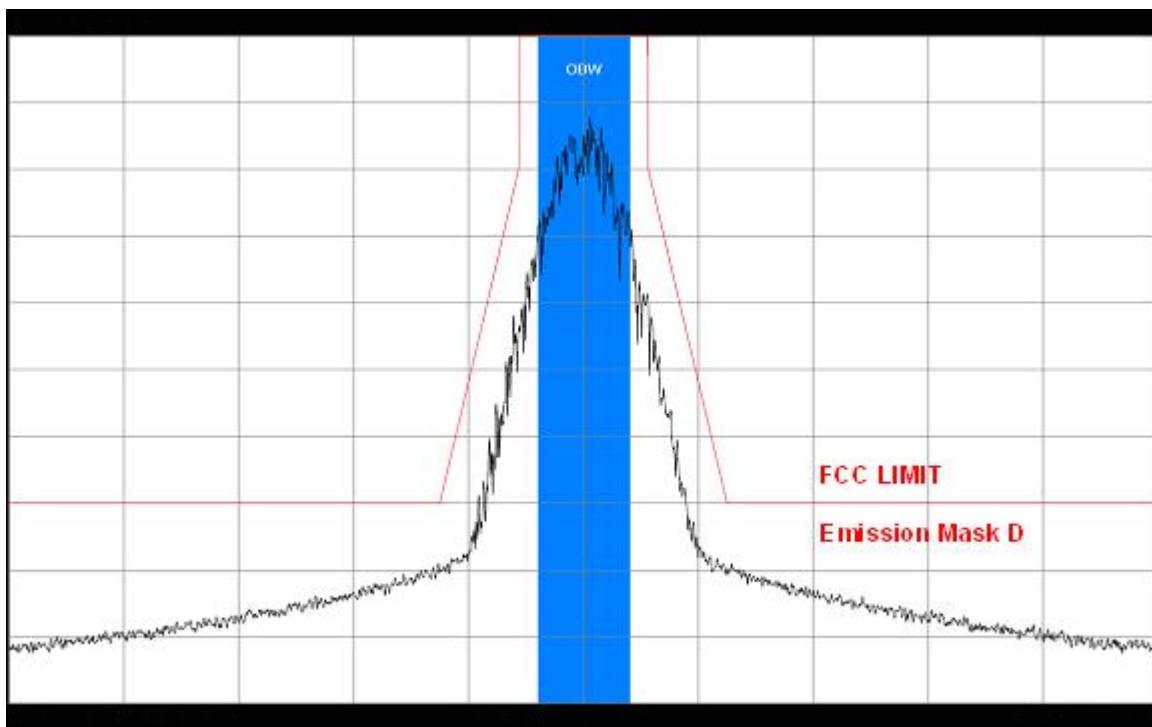


Figure 6E-10: 12.5 kHz Channel Spacing, 484.9875 MHz, 6.25e TDMA, Mask D 8K10F1W

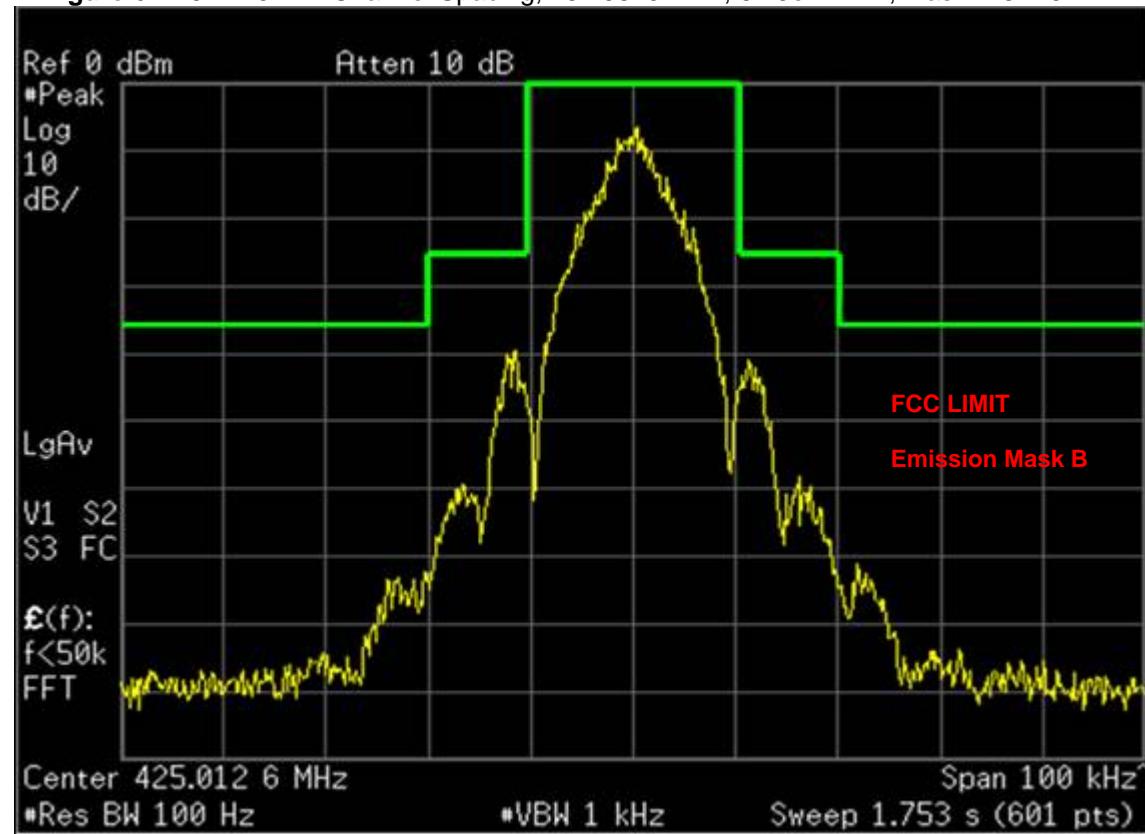


Figure 6E-11: 20 kHz Channel Spacing, 425.0125 MHz, Analog Voice Encryption, Mask B 20K0F1E

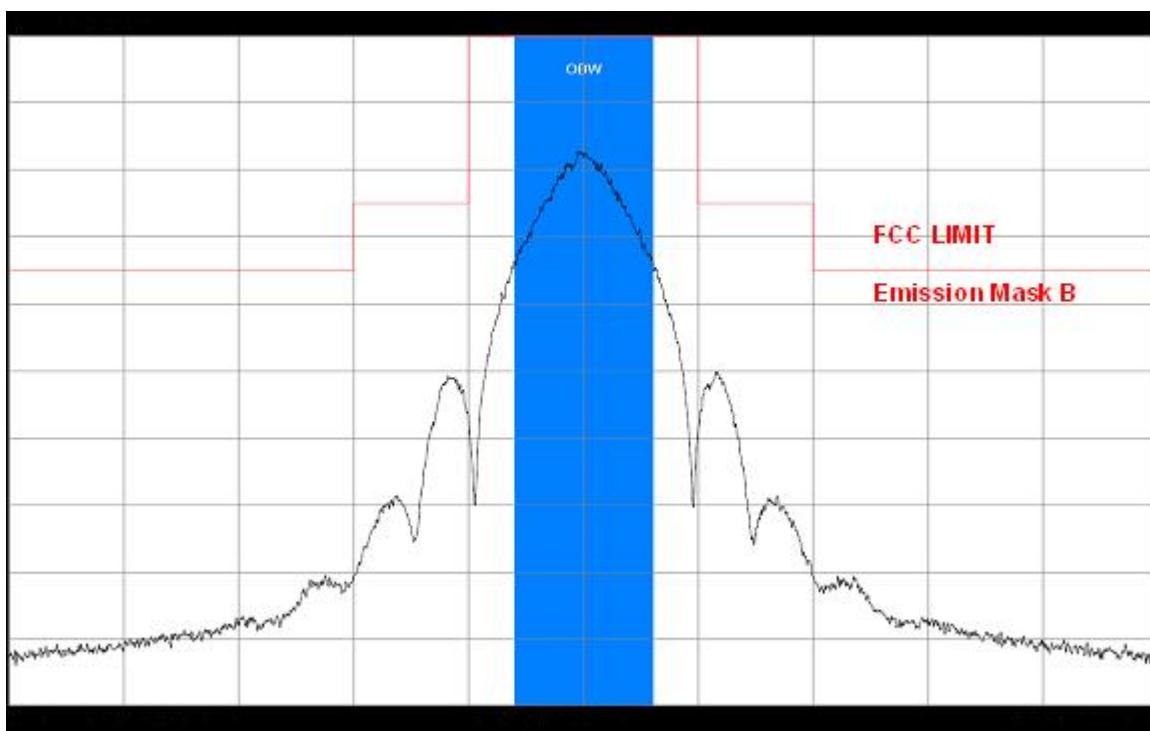


Figure 6E-12: 20 kHz Channel Spacing, 484.9875 MHz, Analog Voice Encryption, Mask B 20K0F1E

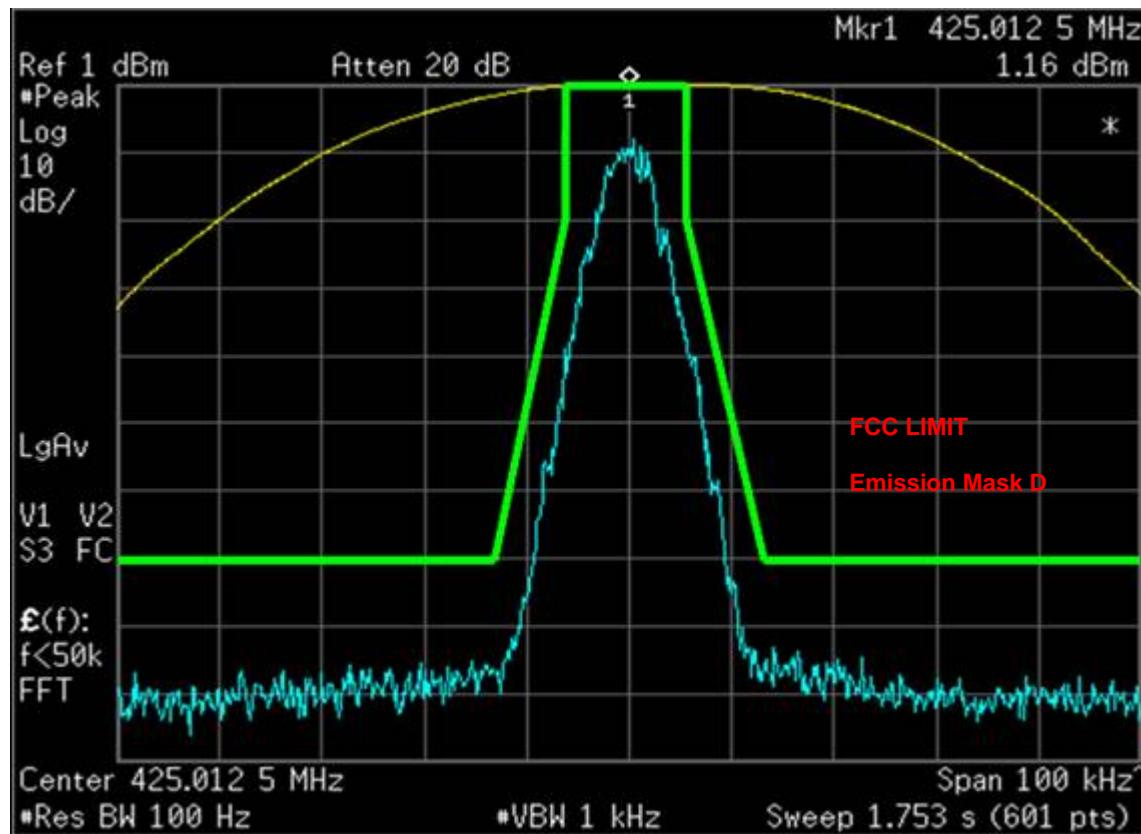


Figure 6E-13: 12.5 kHz Channel Spacing, 425.0125 MHz, Digital Voice Encryption, Mask D 8K10F1E

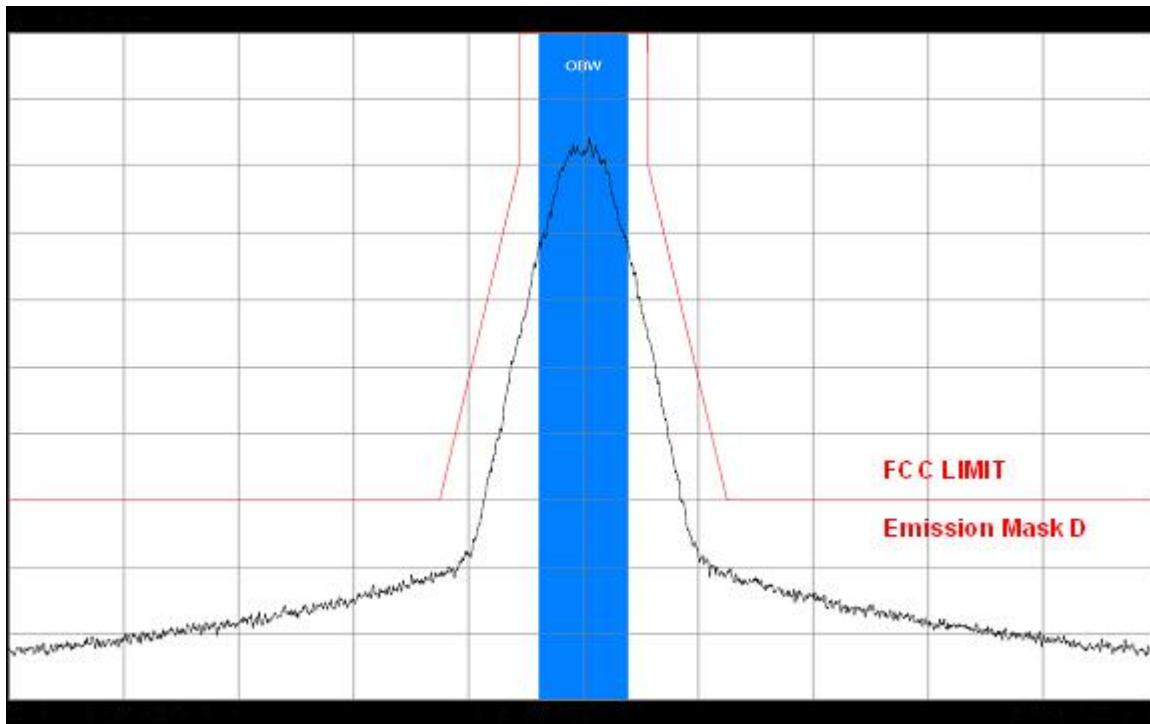


Figure 6E-14: 12.5 kHz Channel Spacing, 484.9875 MHz, Digital Voice Encryption, Mask D 8K10F1E

EXHIBIT 6F

Conducted Spurious Emissions - Pursuant 47 CFR 2.1051 and 2.1033(c) (13)

Note: Red lines on graphs correspond to the FCC limit of -20 dBm for 12.5 kHz channel spacing and -13 dBm for 25 kHz channel spacing.

ANALOG MODE

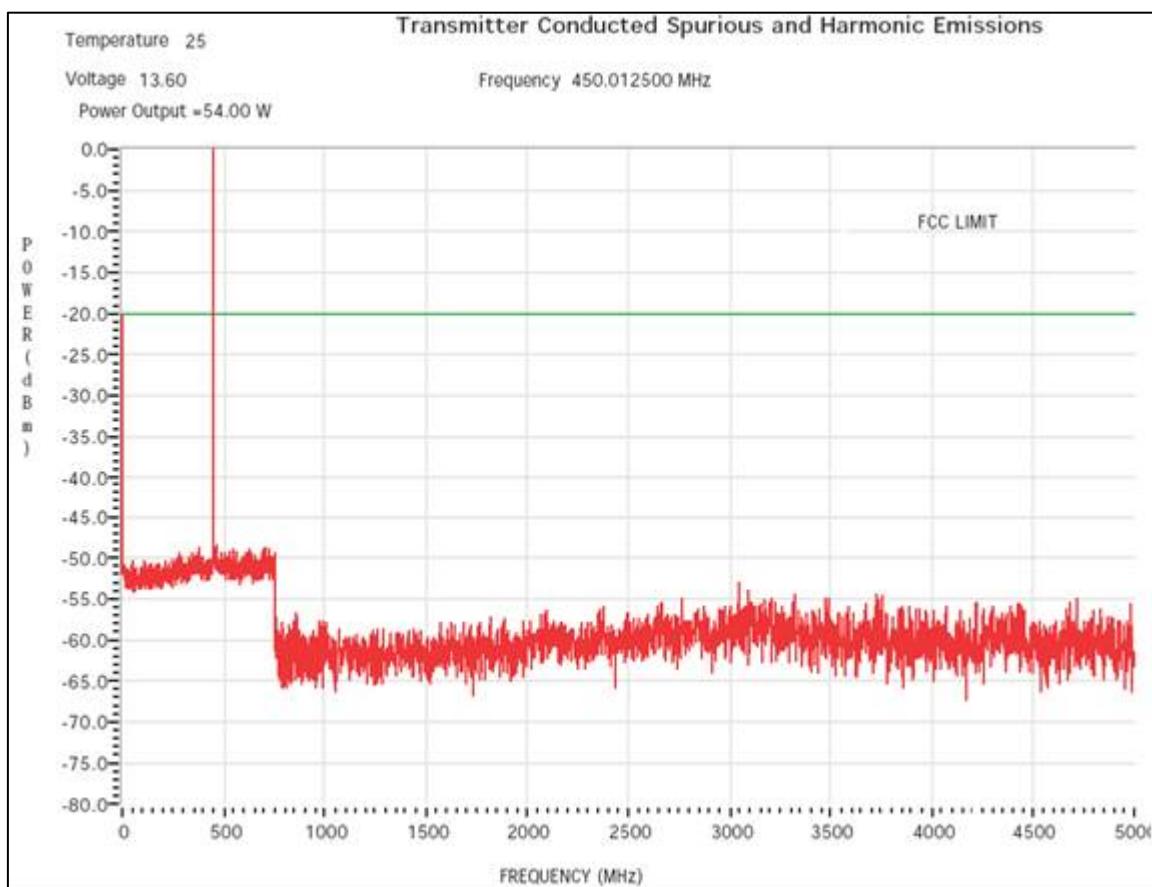


Figure 6F-1: 54W Harmonic of Carrier 450.0125 MHz, 12.5 kHz Channel Spacing

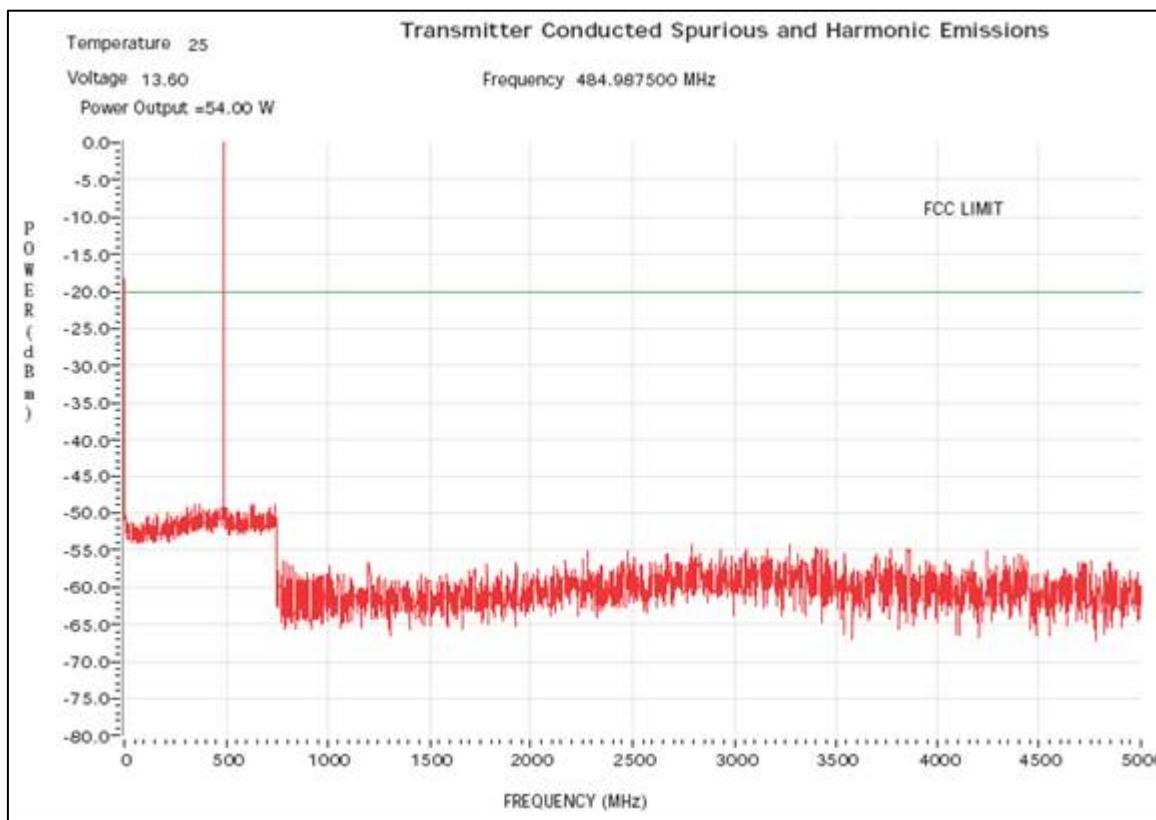


Figure 6F-2: 54W Harmonics of Carrier 484.9875 MHz, 12.5 kHz Channel Spacing

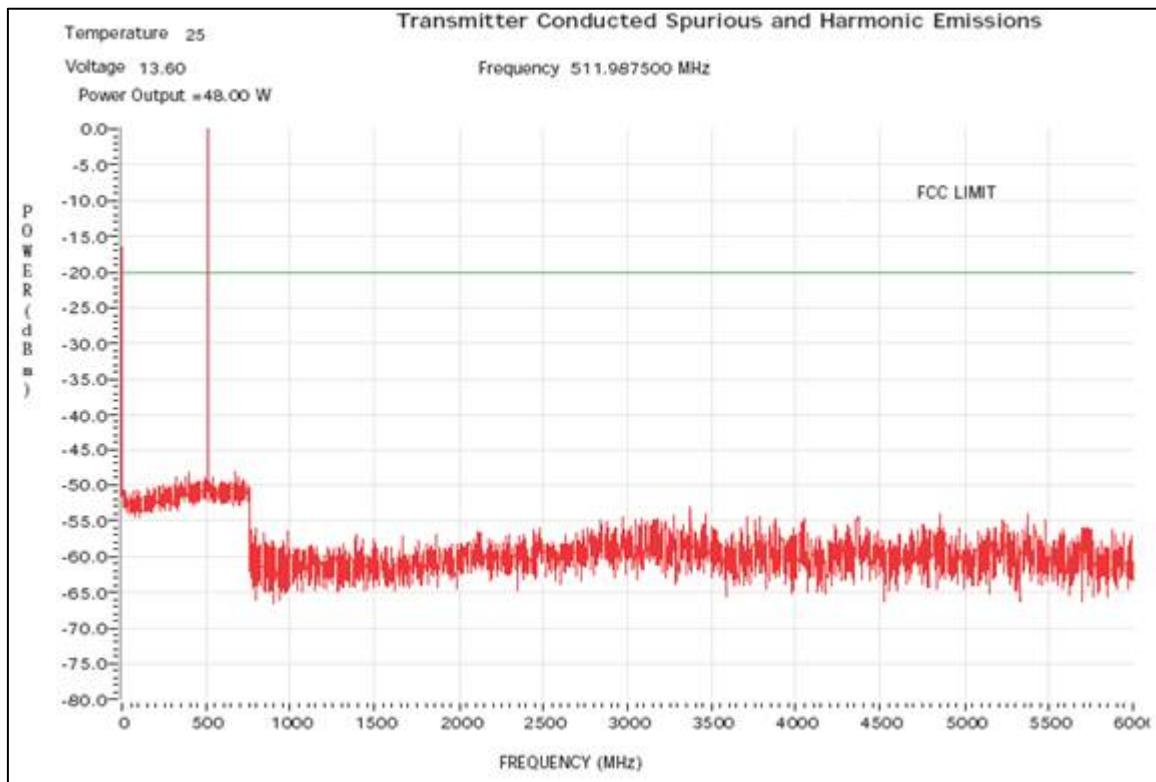


Figure 6F-3: 48W Harmonics of Carrier 511.9875 MHz, 12.5 kHz Channel Spacing

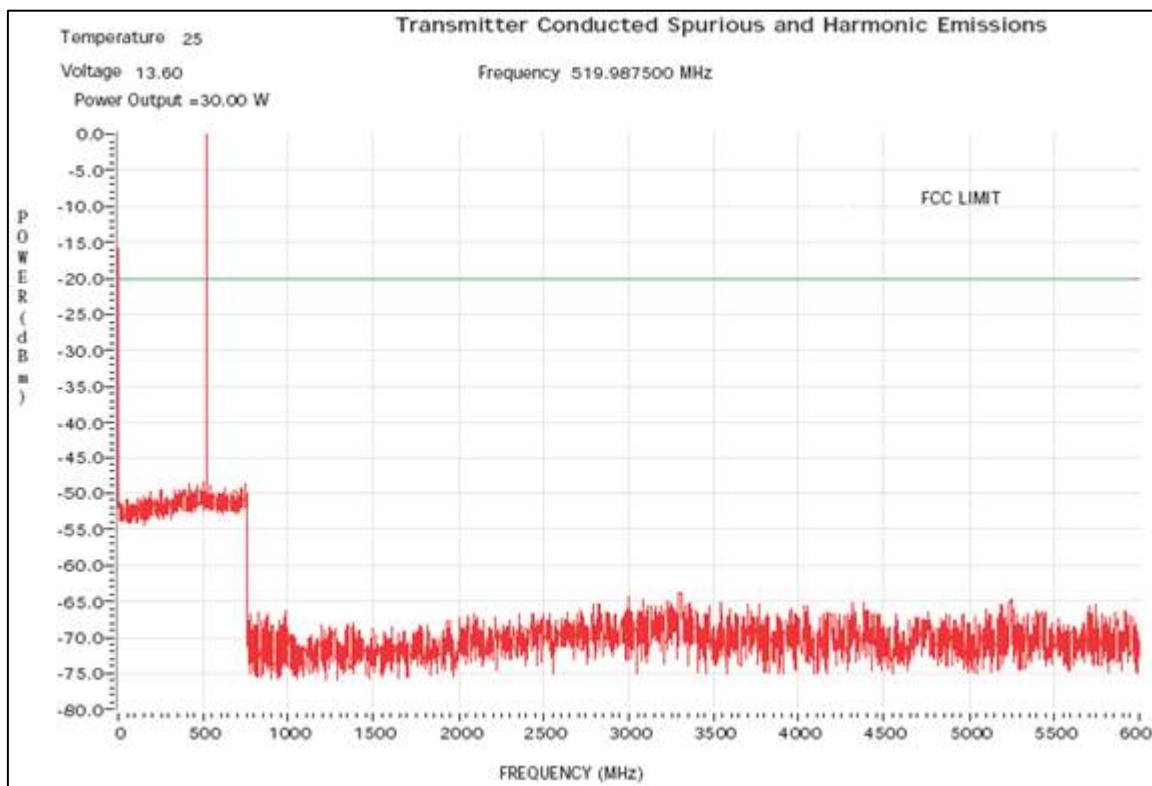


Figure 6F-4: 30W Harmonics of Carrier 519.9875 MHz, 12.5 kHz Channel Spacing

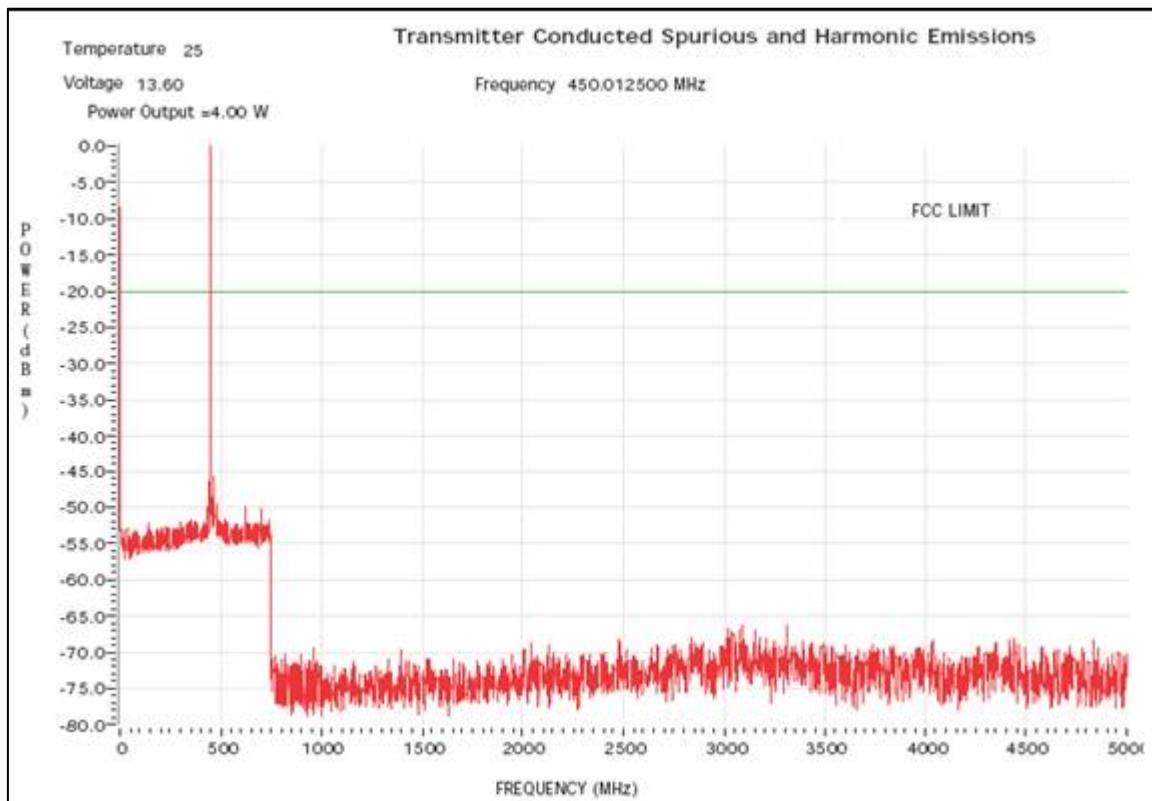


Figure 6F-5: 4W Harmonics of Carrier 450.0125 MHz, 12.5 kHz Channel Spacing

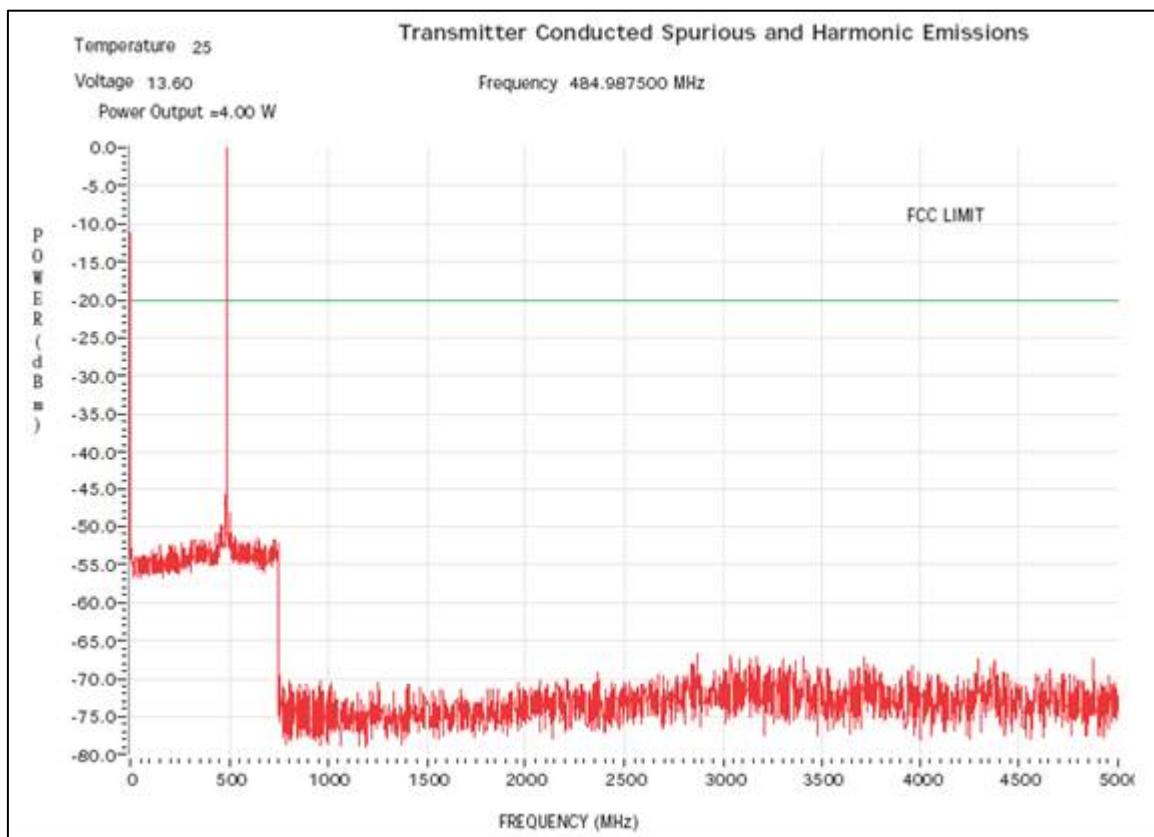


Figure 6F-6: 4W Harmonics of Carrier 484.9875 MHz, 12.5 kHz Channel Spacing

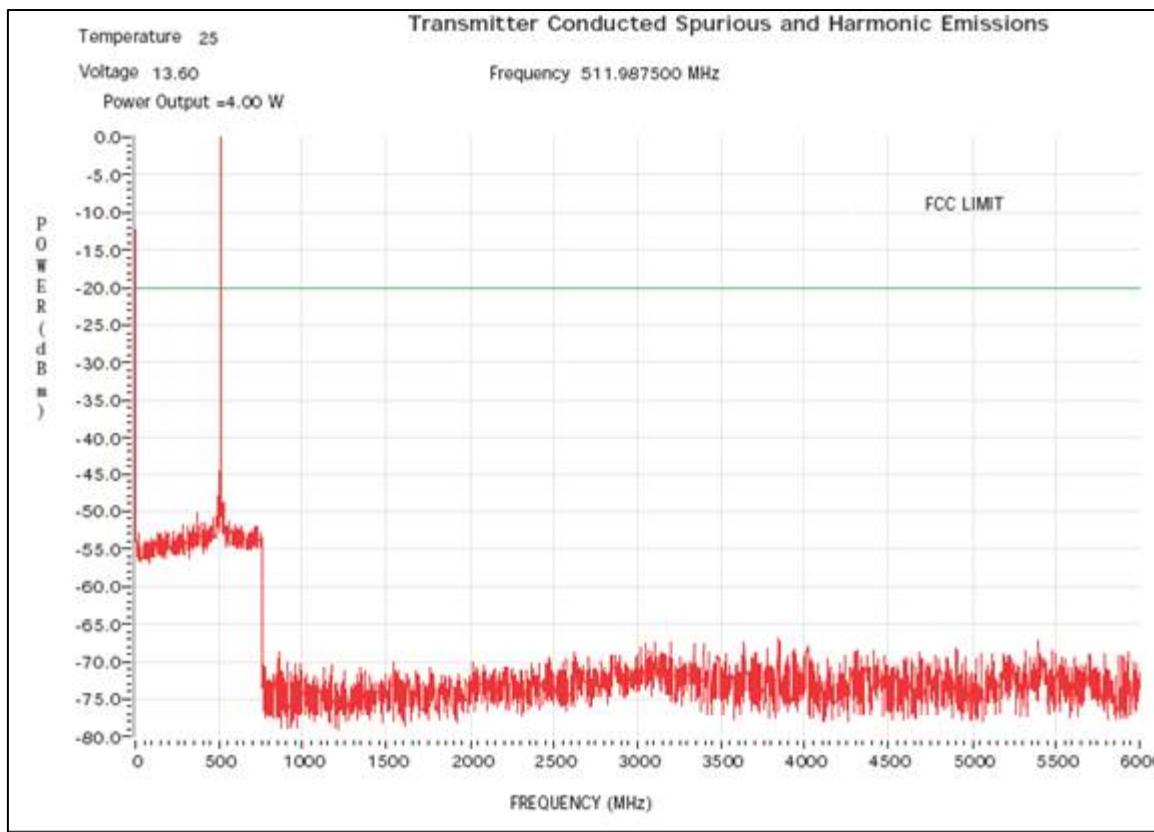


Figure 6F-7: 4W Harmonics of Carrier 511.9875 MHz, 12.5 kHz Channel Spacing

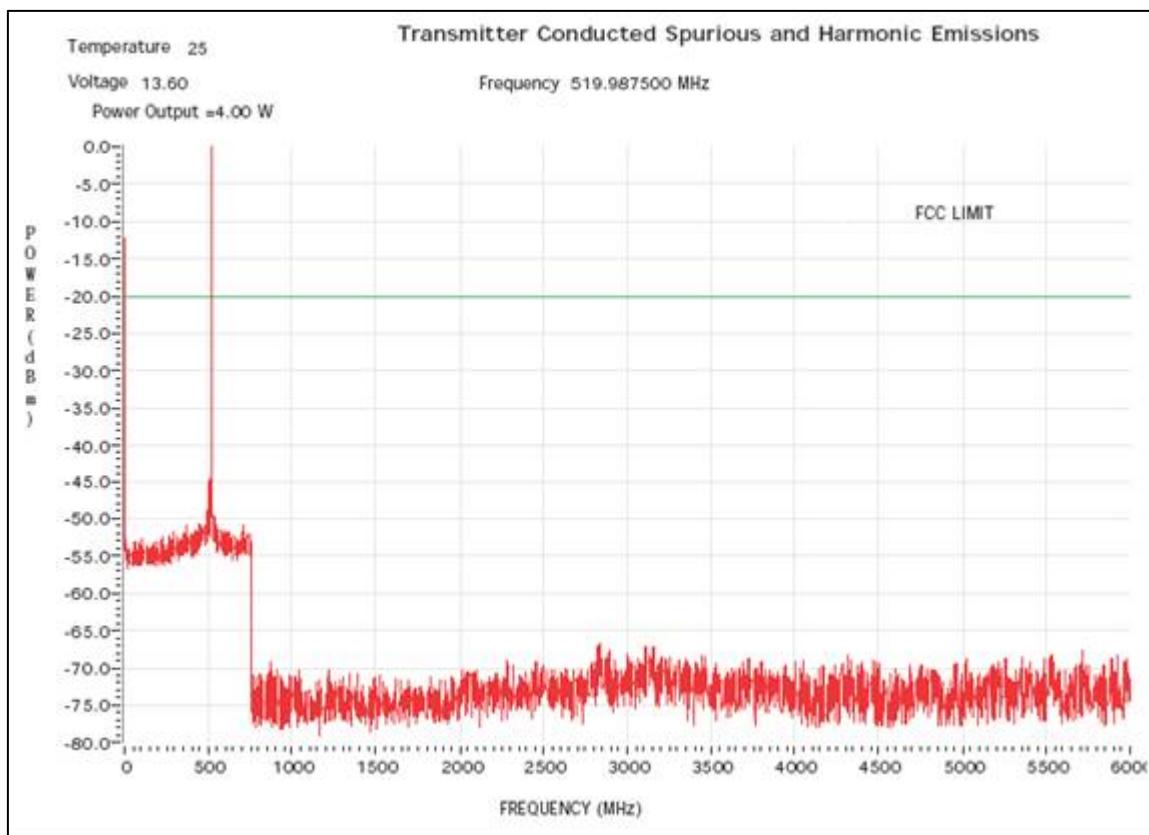


Figure 6F-8: 4W Harmonics of Carrier 519.9875 MHz, 12.5 kHz Channel Spacing

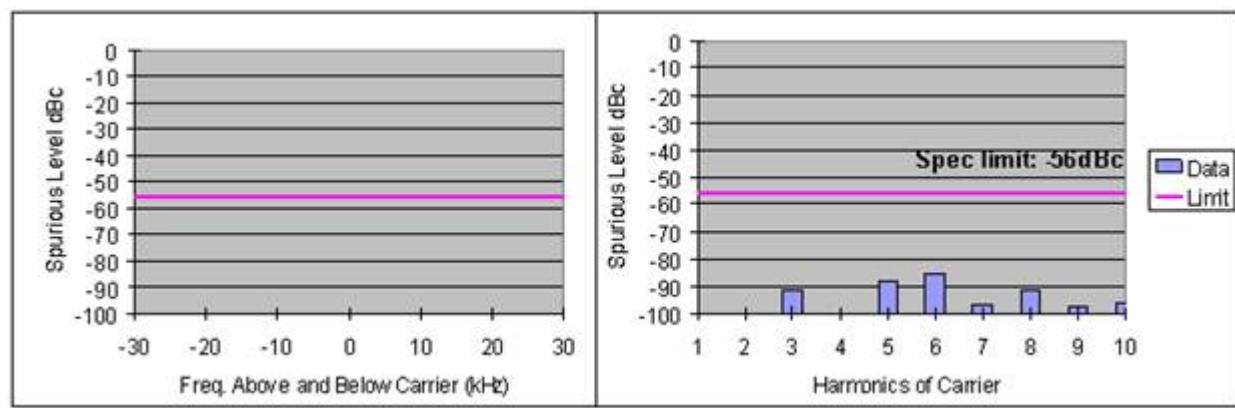


Figure 6F-9: 4W Harmonic of Carrier 380.0125 MHz

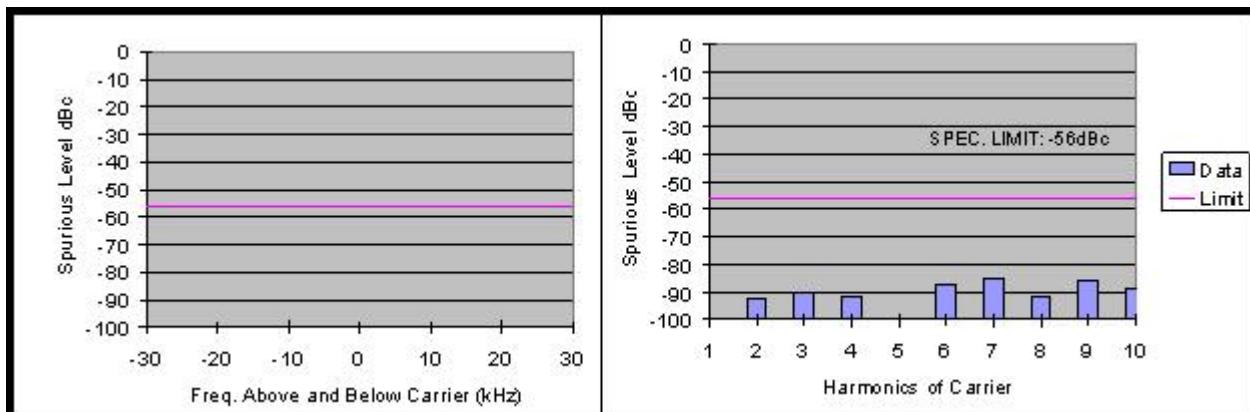


Figure 6F-10: 4W Harmonic of Carrier 406.2 MHz

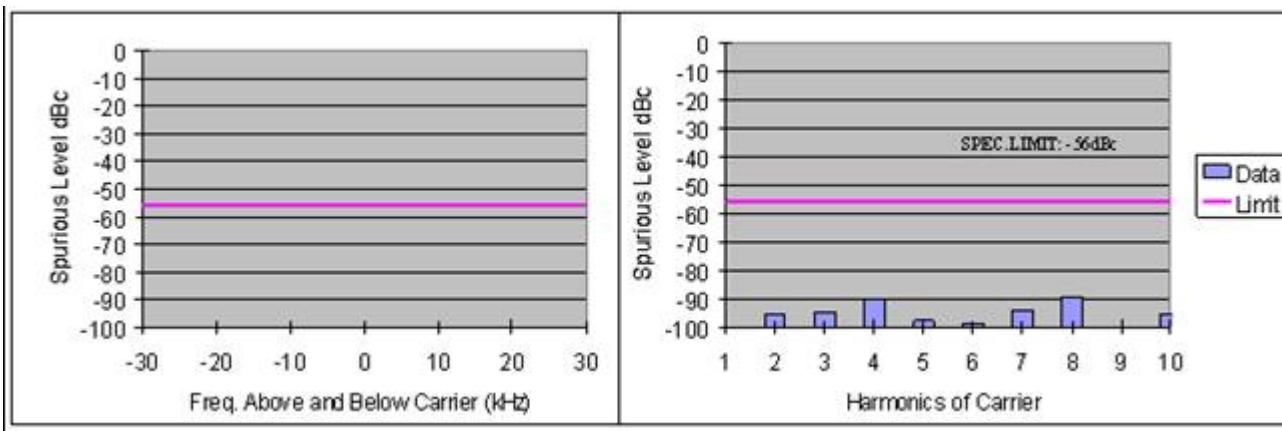


Figure 6F-11: 4W Harmonic of Carrier 425.0125 MHz

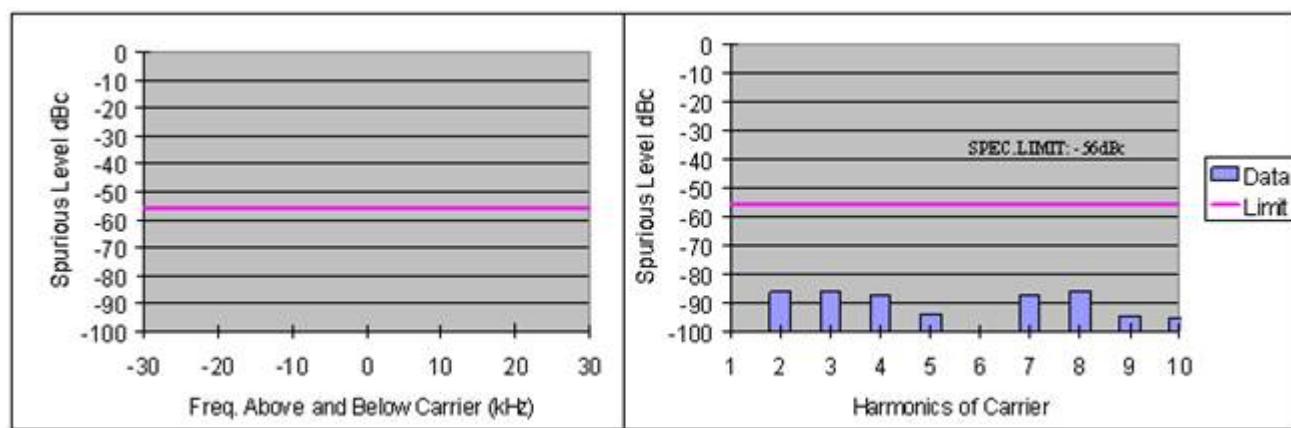


Figure 6F-12: 4W Harmonic of Carrier 469.9875 MHz

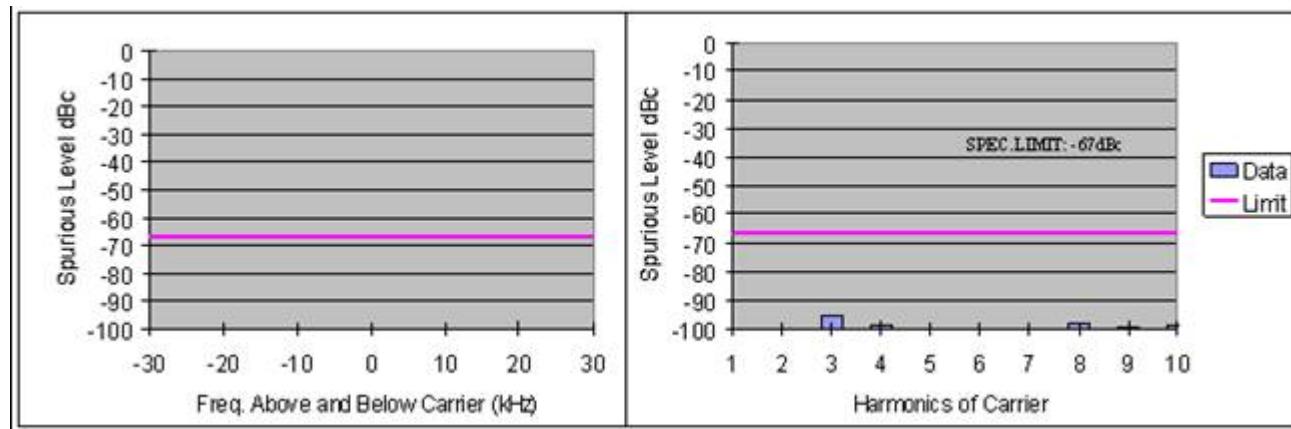


Figure 6F-13: 48W Harmonic of Carrier 380.0125 MHz

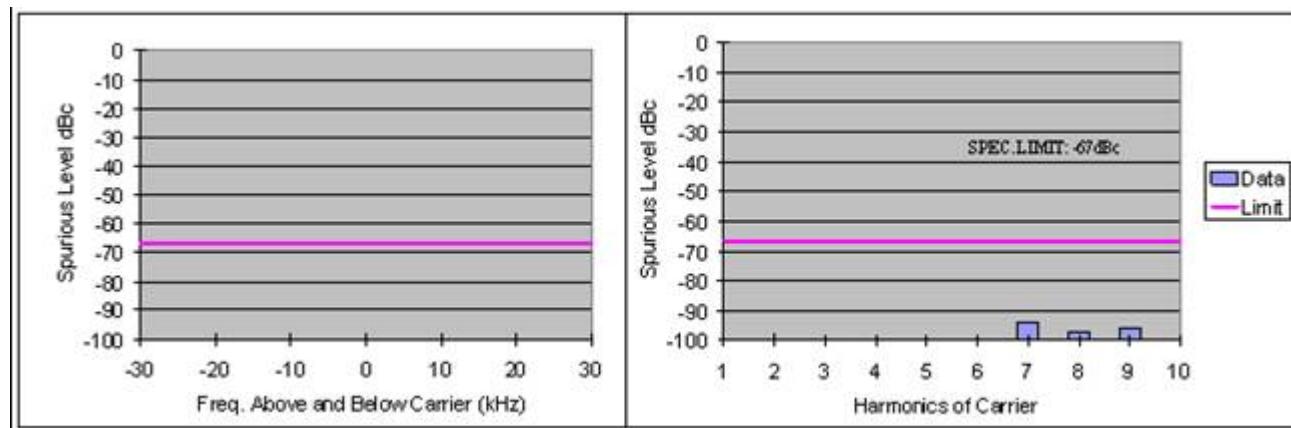


Figure 6F-14: 48W Harmonic of Carrier 406.2 MHz

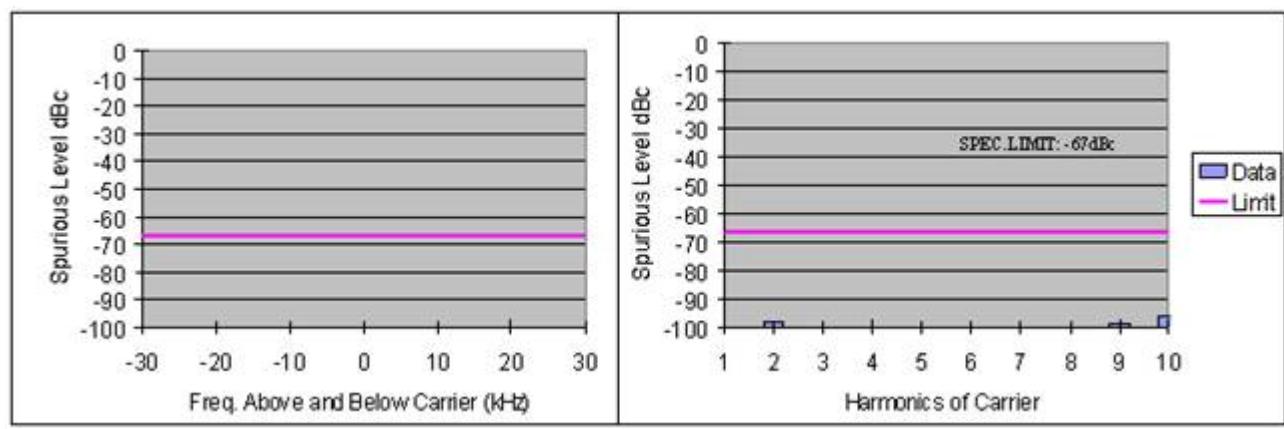


Figure 6F-15: 48W Harmonic of Carrier 425.0125 MHz

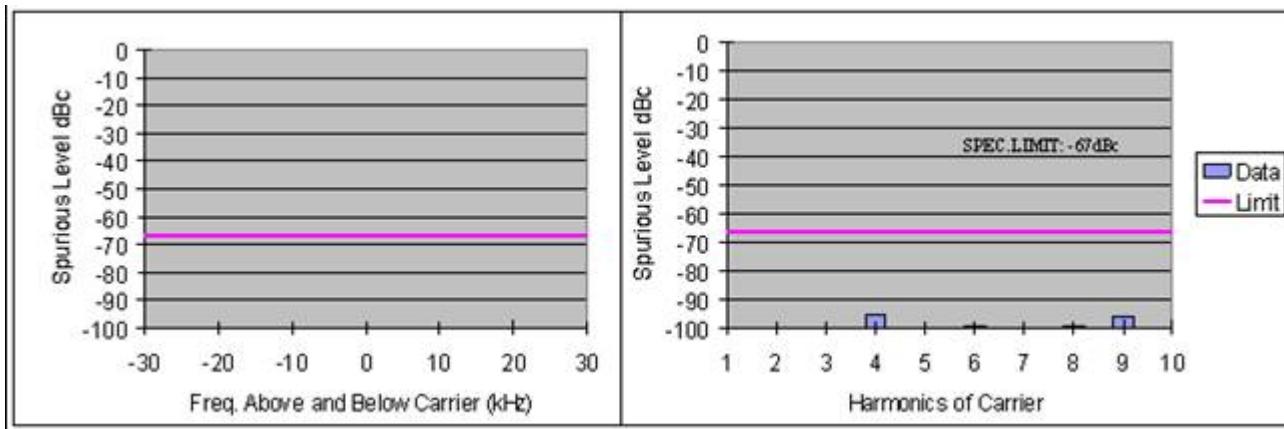
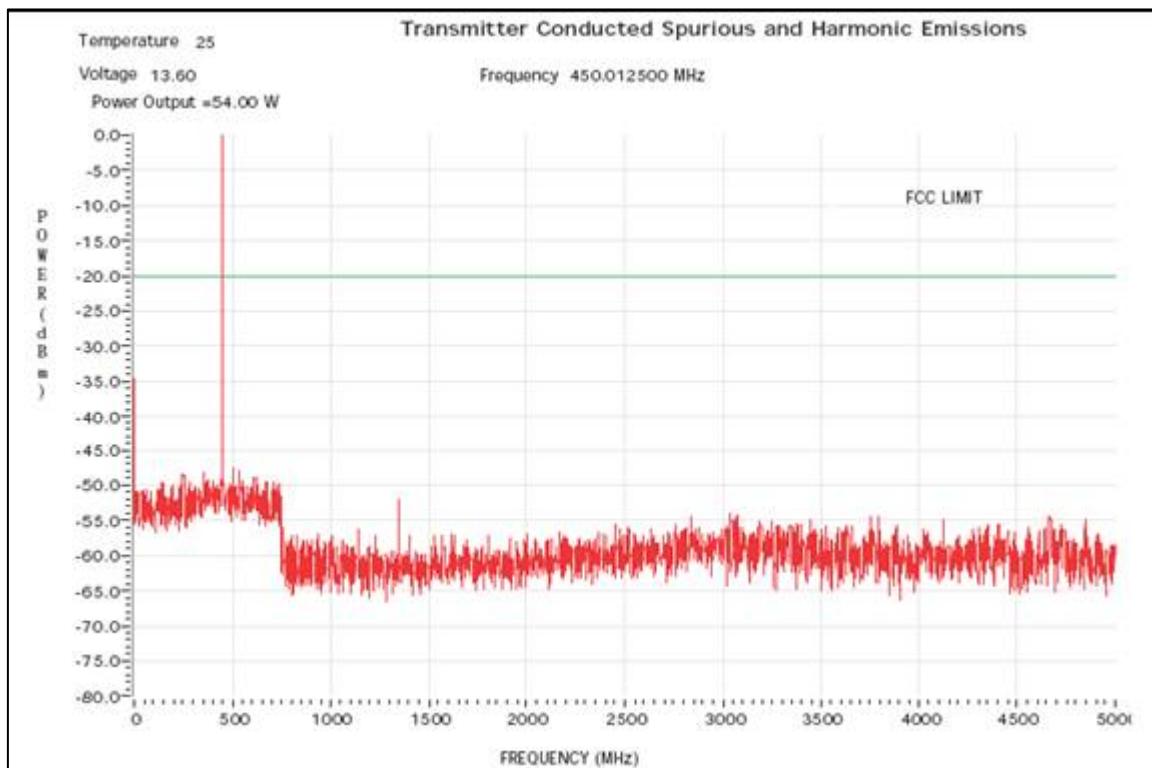
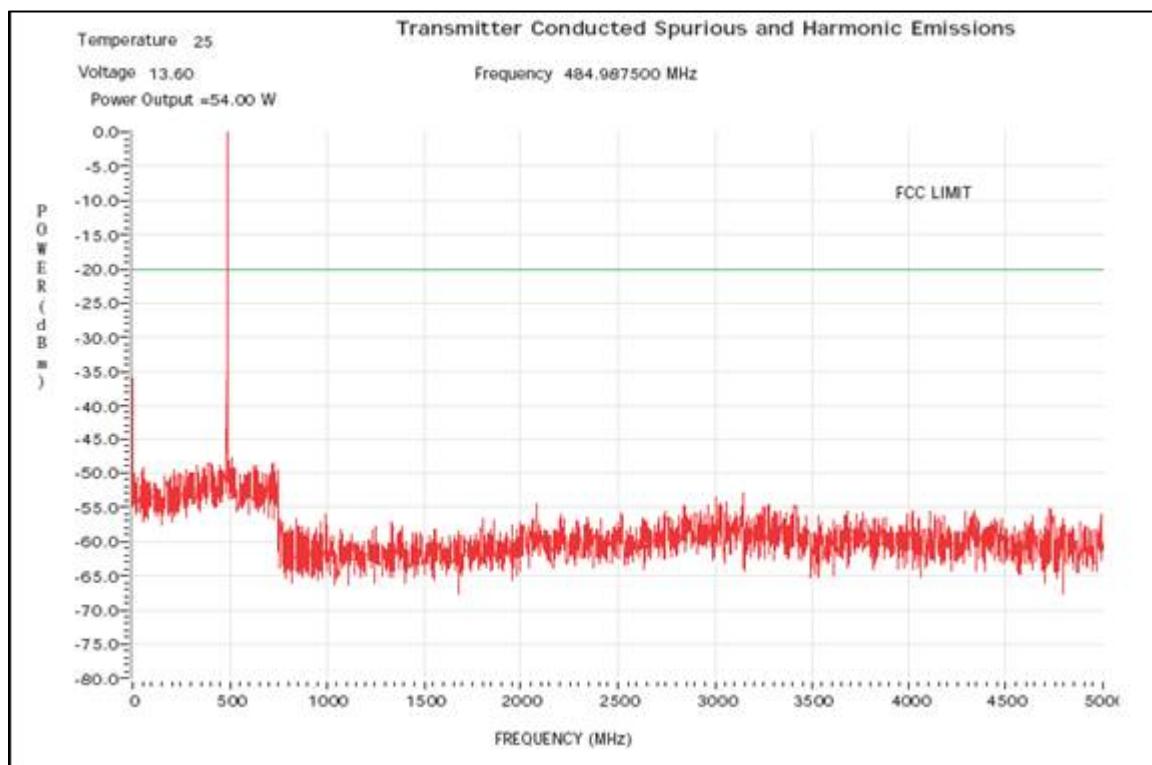


Figure 6F-16: 48W Harmonic of Carrier 469.9875 MHz

DIGITAL MODE**Figure 6F-17: 54W Harmonics of Carrier 450.0125 MHz, 12.5 kHz Channel Spacing****Figure 6F-18: 54W Harmonics of Carrier 484.9875 MHz, 12.5 kHz Channel Spacing**

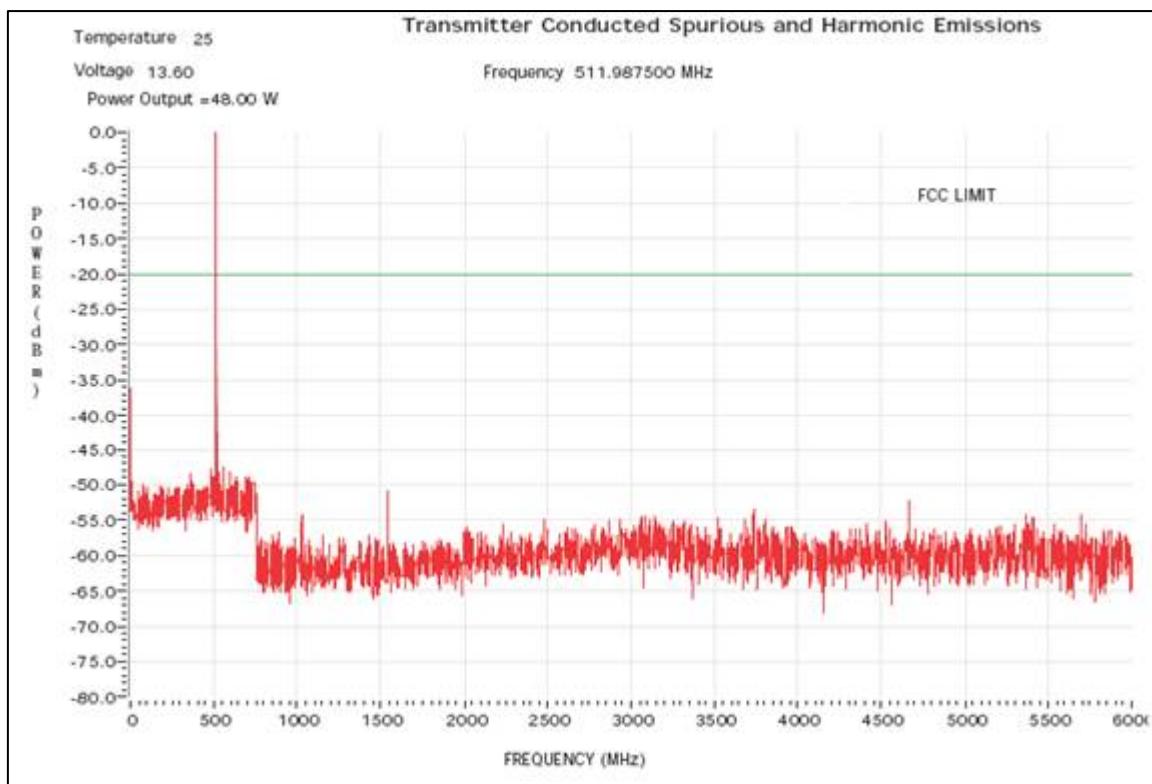


Figure 6F-19: 48W Harmonics of Carrier 511.9875 MHz, 12.5 kHz Channel Spacing

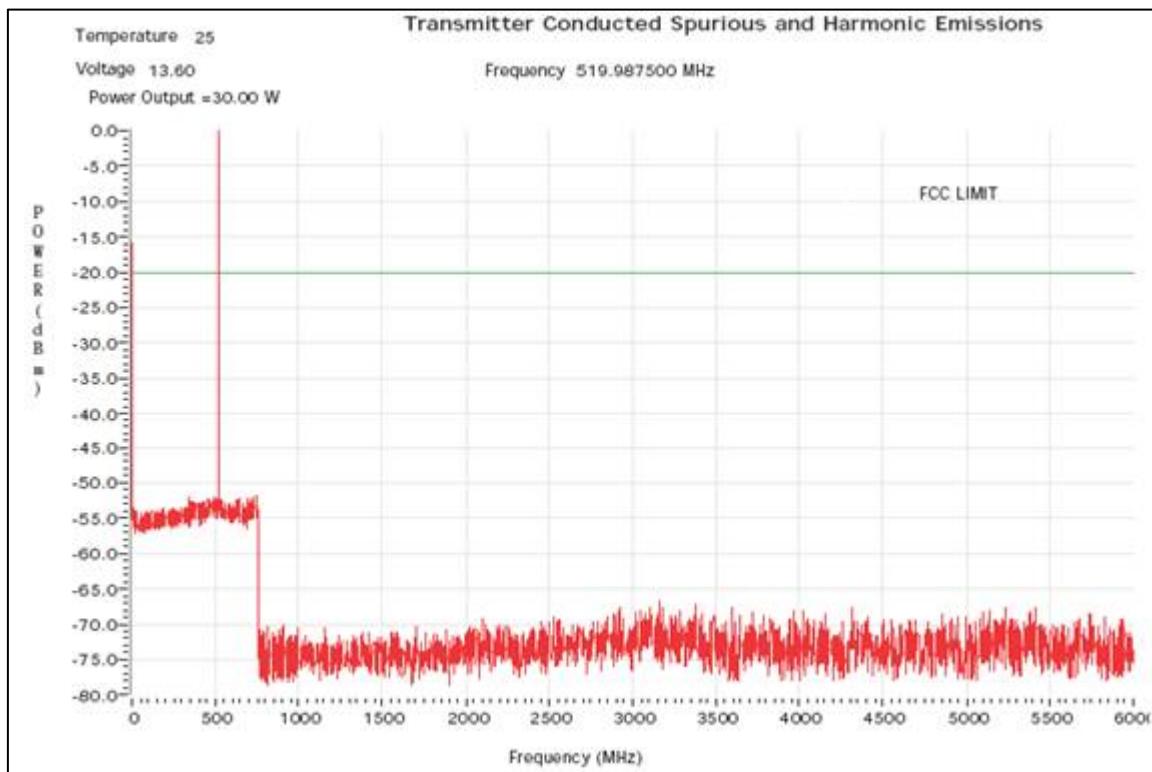


Figure 6F-20: 30W Harmonics of Carrier 519.9875 MHz, 12.5 kHz Channel Spacing

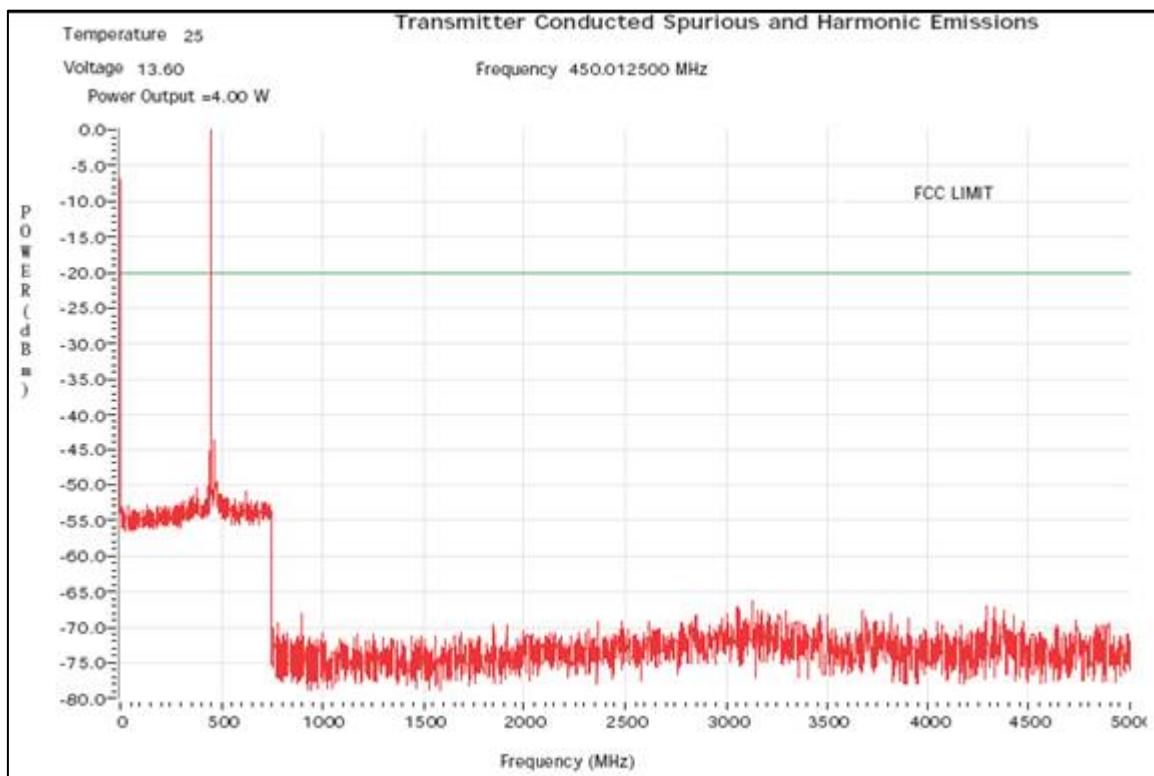


Figure 6F-21: 4W Harmonics of Carrier 450.0125 MHz, 12.5 kHz Channel Spacing

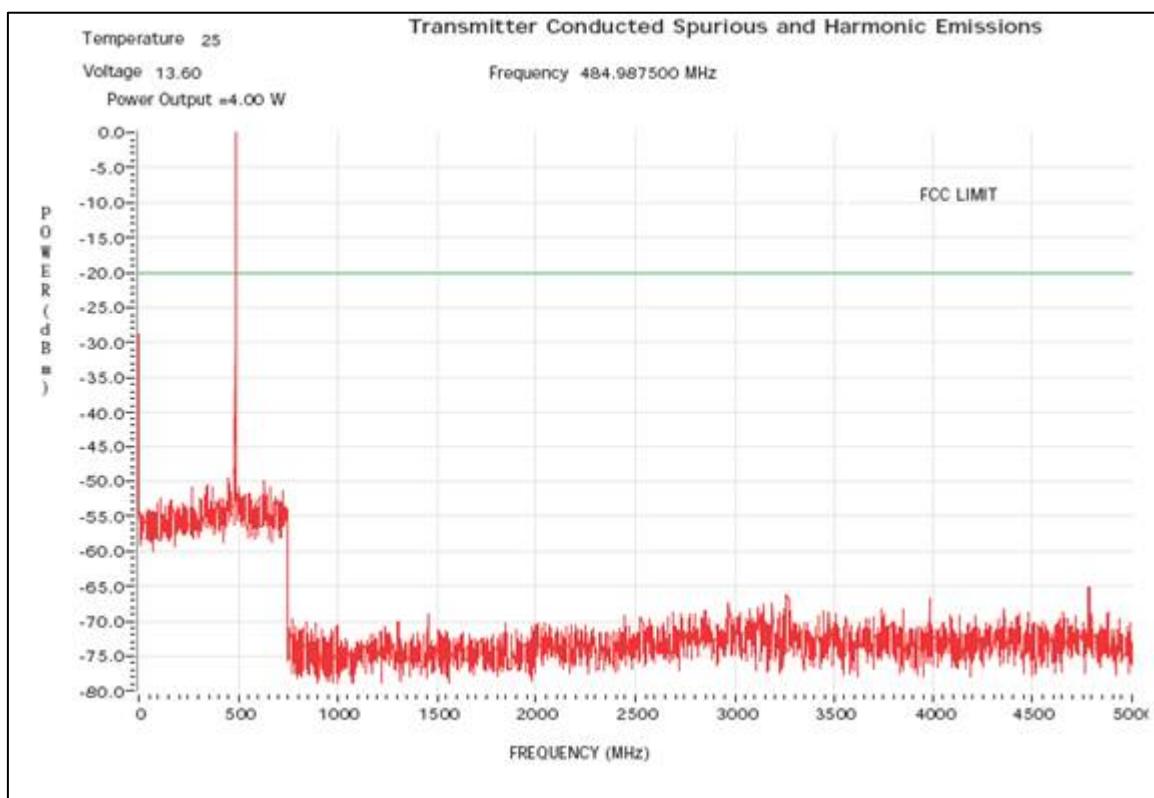


Figure 6F-22: 4W Harmonics of Carrier 484.9875 MHz, 12.5 kHz Channel Spacing

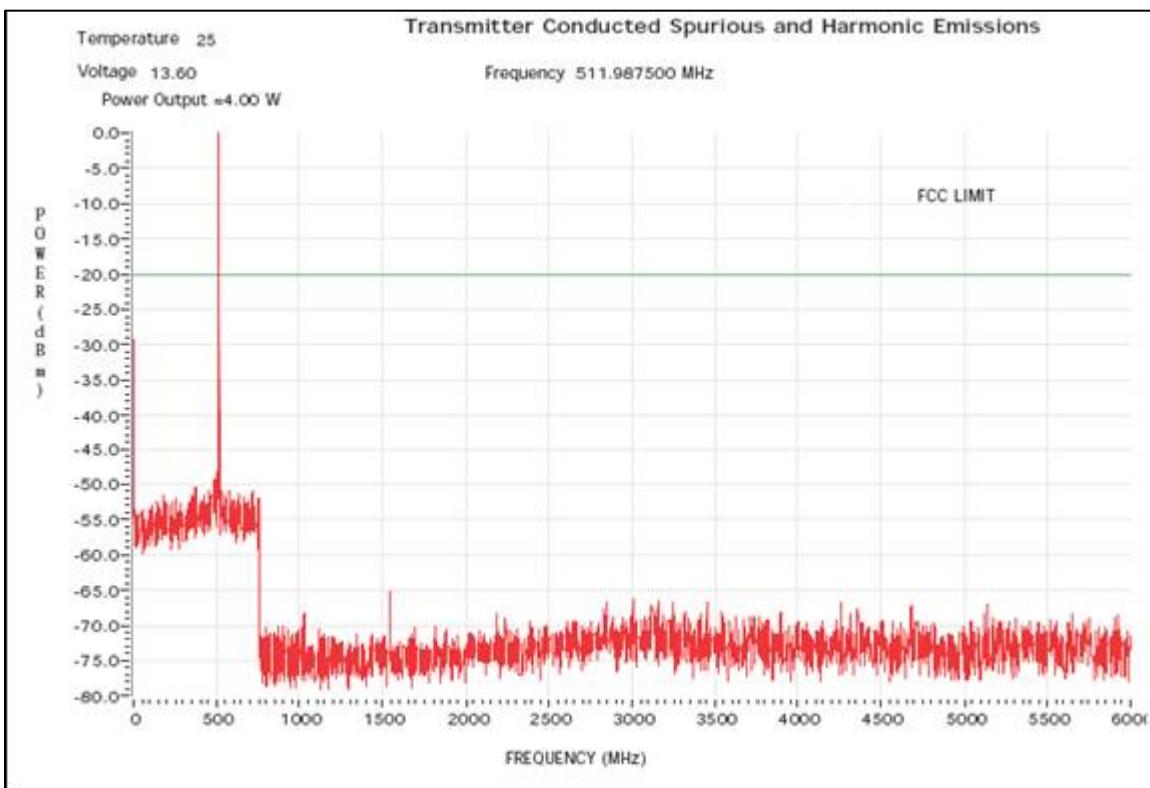


Figure 6F-23: 4W Harmonics of Carrier 511.9875 MHz, 12.5 kHz Channel Spacing

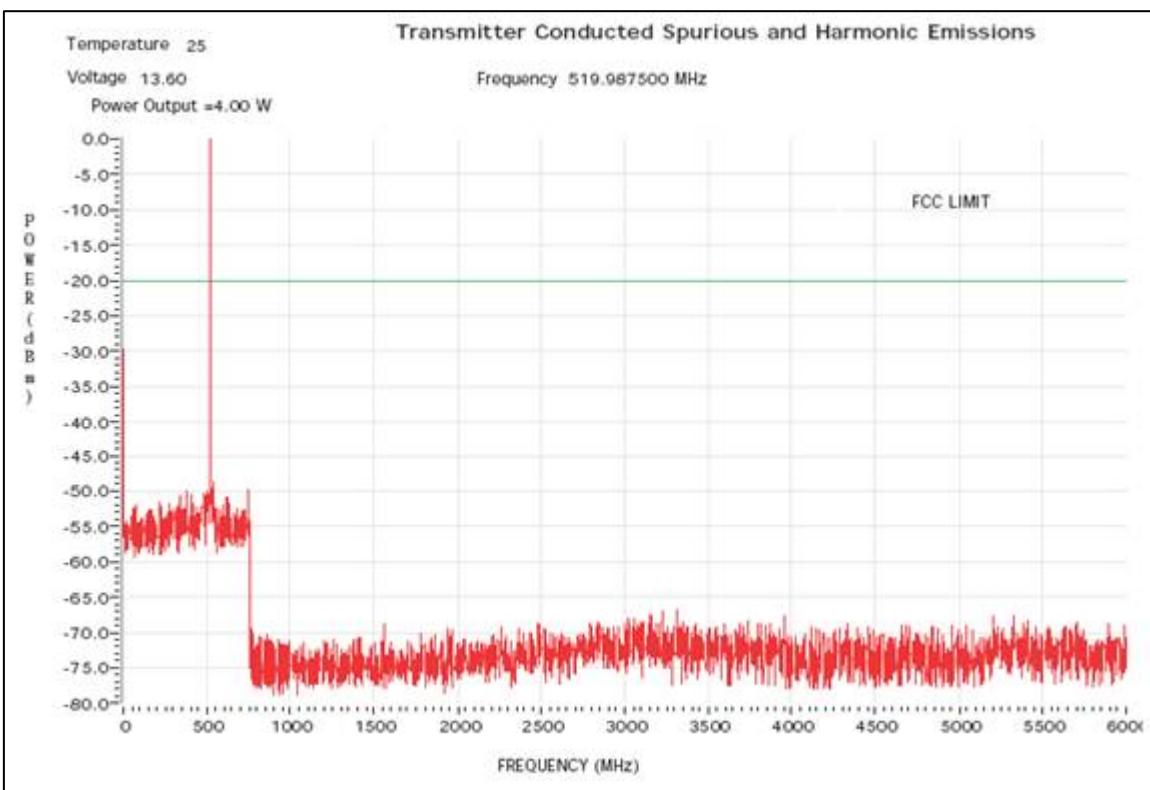


Figure 6F-24: 4W Harmonics of Carrier 519.9875 MHz, 12.5 kHz Channel Spacing

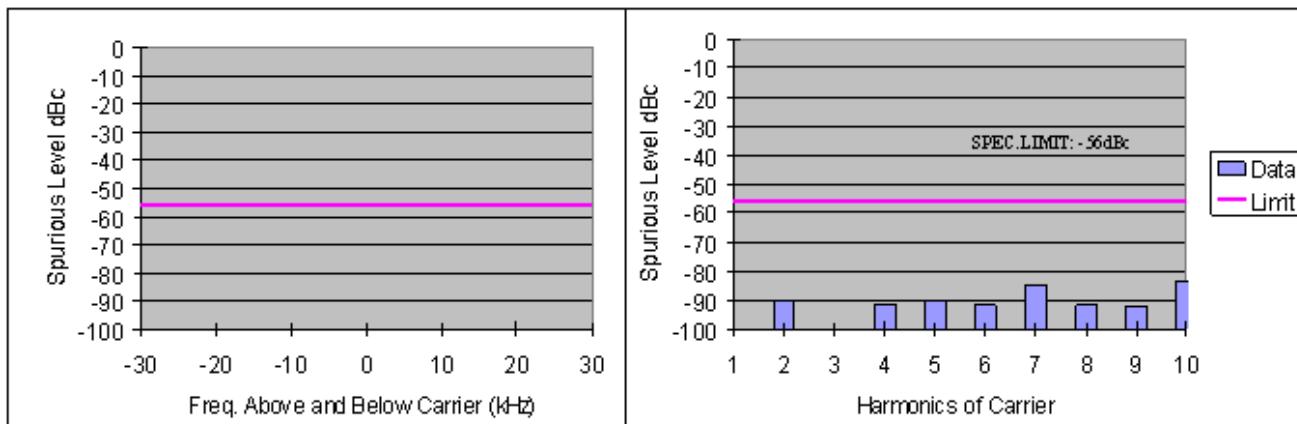


Figure 6F-25: 4W Harmonic of Carrier 380.0125 MHz

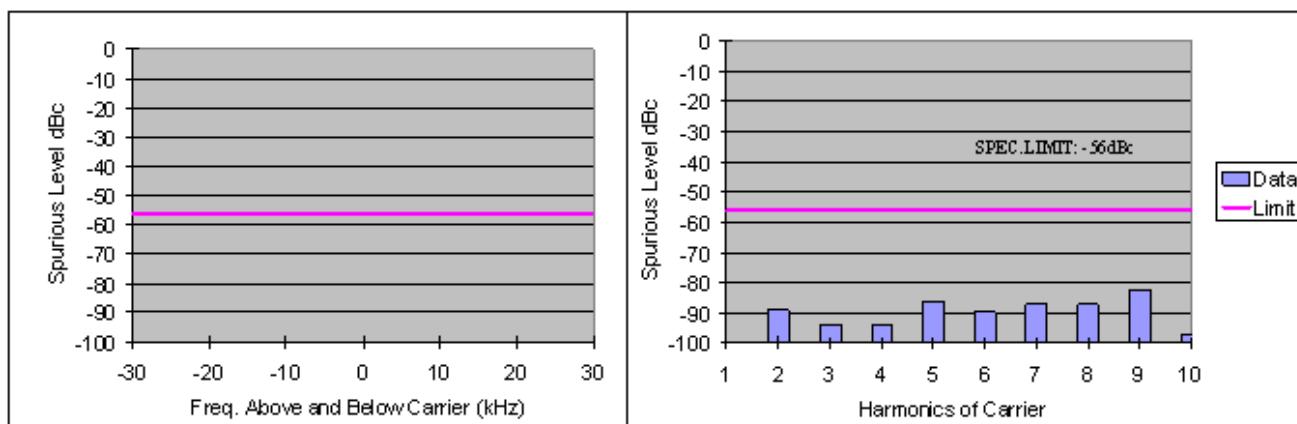


Figure 6F-26: 4W Harmonic of Carrier 406.2 MHz

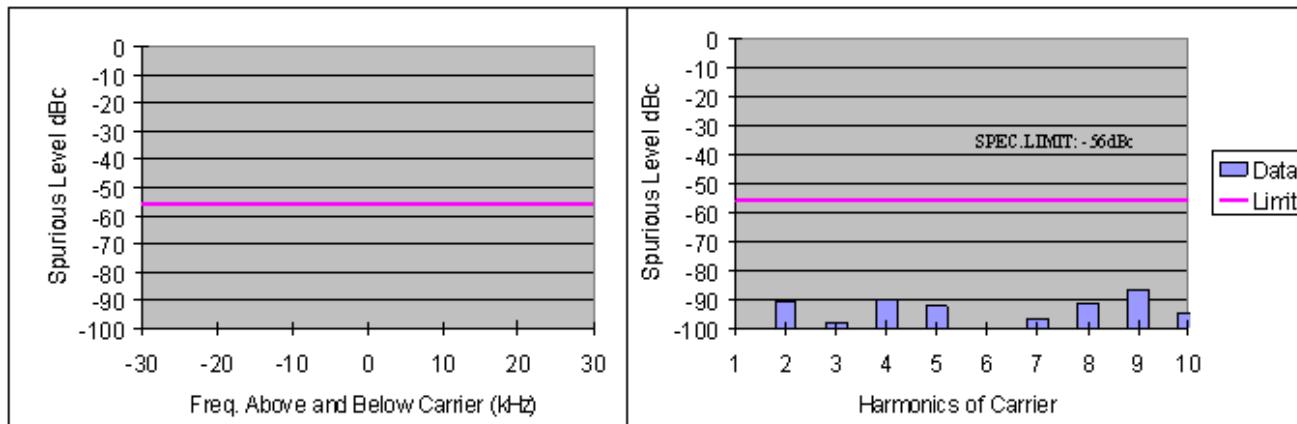


Figure 6F-27: 4W Harmonic of Carrier 425.0125 MHz

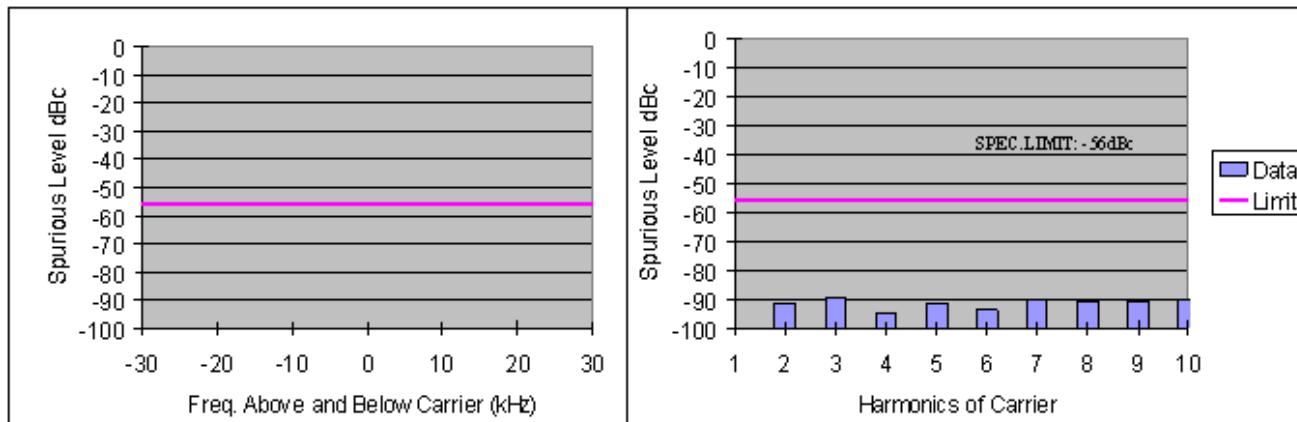


Figure 6F-28: 4W Harmonic of Carrier 469.9875 MHz

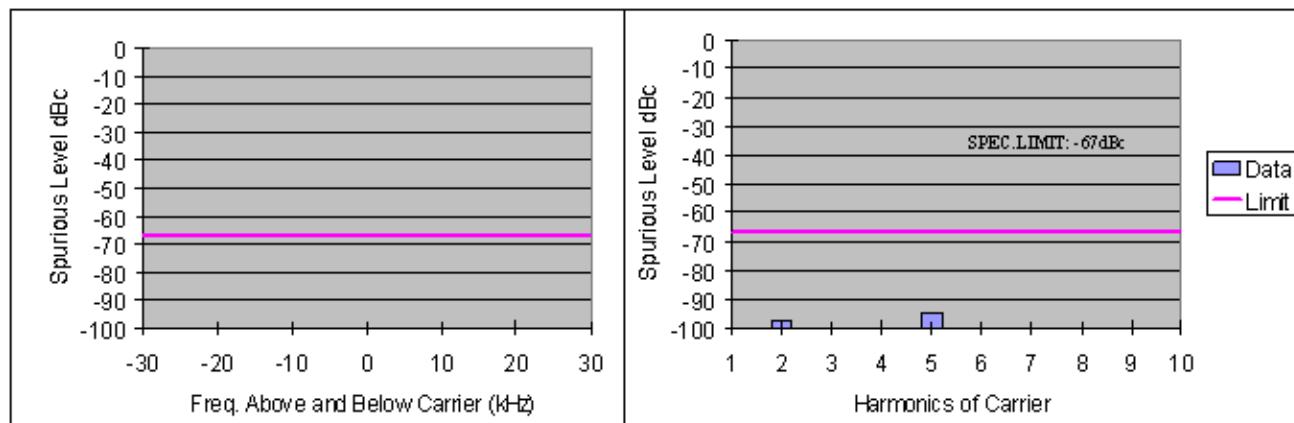


Figure 6F-29: 48W Harmonic of Carrier 380.0125 MHz

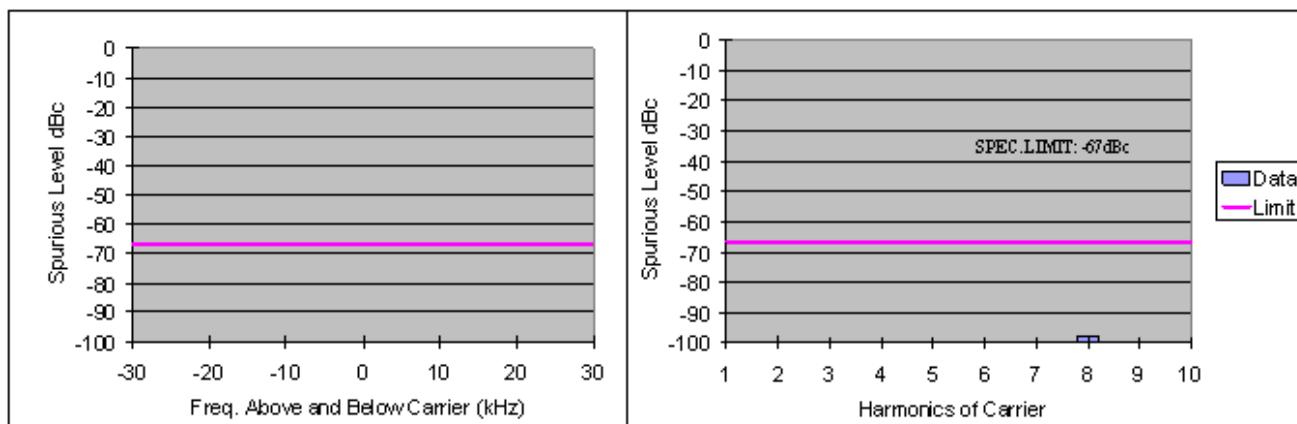


Figure 6F-30: 48W Harmonic of Carrier 406.2 MHz

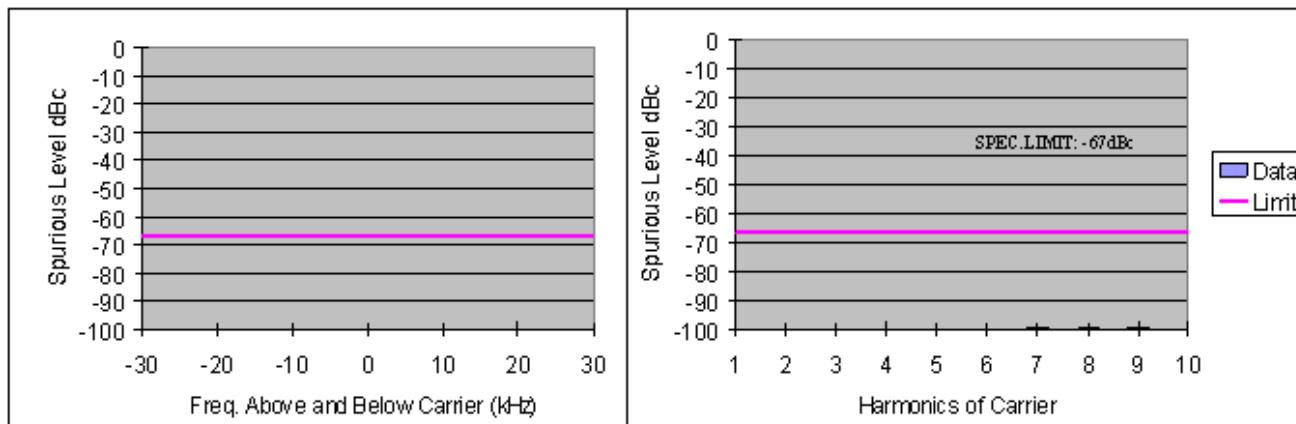


Figure 6F-31: 48W Harmonic of Carrier 425.0125 MHz

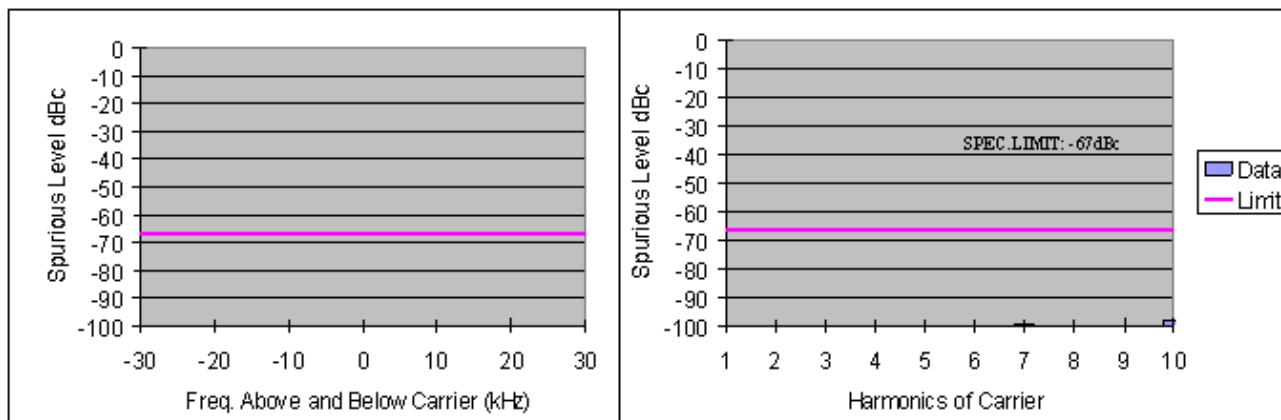


Figure 6F-32: 48W Harmonic of Carrier 469.9875 MHz

TDMA- F2

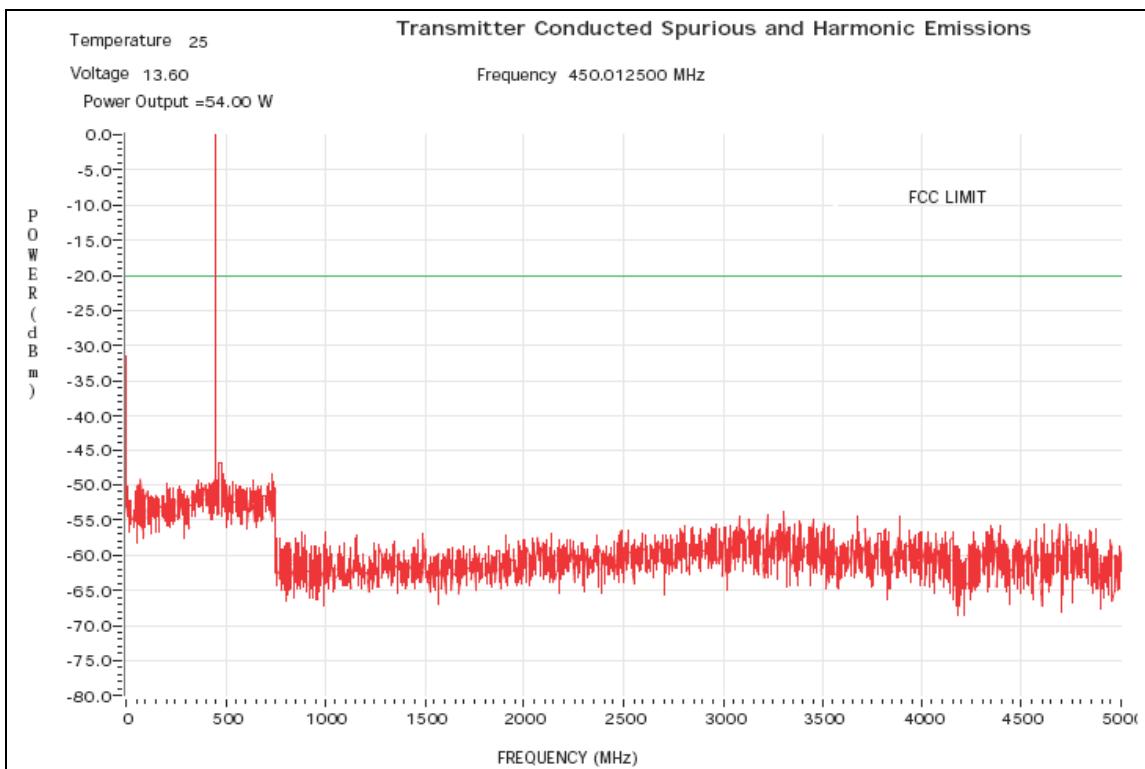


Figure 6F-33: 54W Harmonics of Carrier 450.0125 MHz, 12.5 kHz Channel Spacing

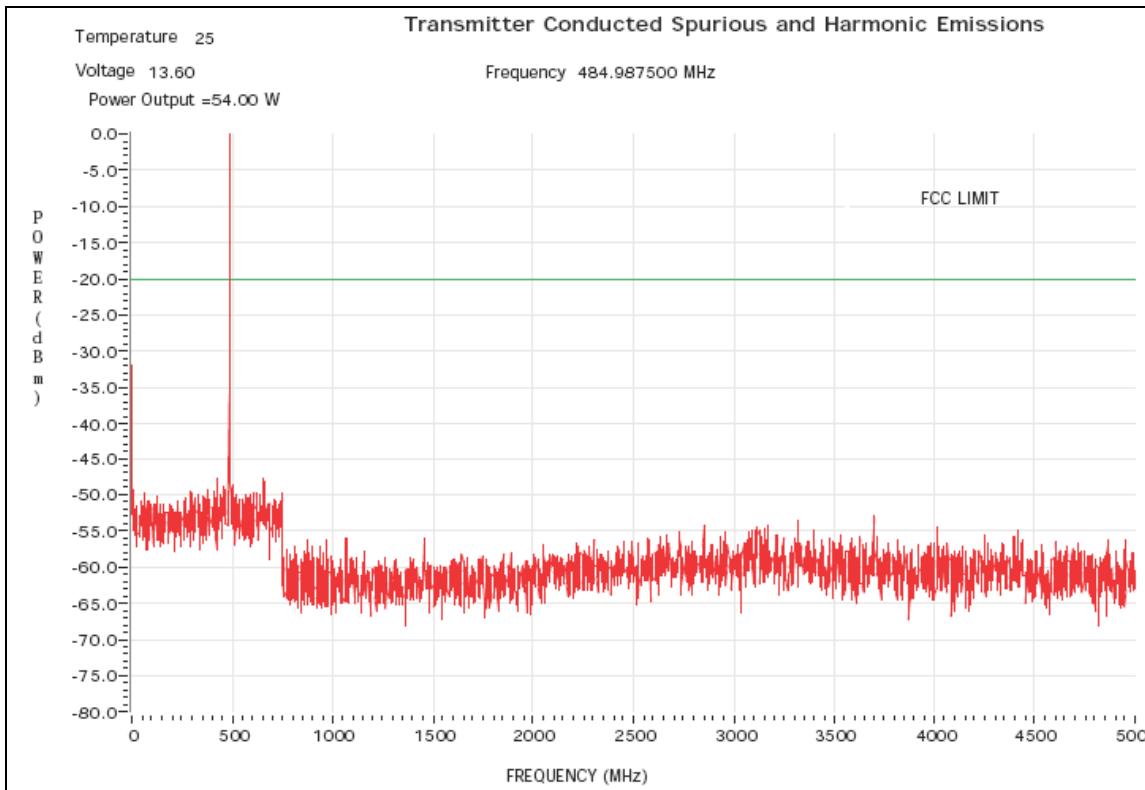


Figure 6F-34: 54W Harmonics of Carrier 484.9875 MHz, 12.5 kHz Channel Spacing

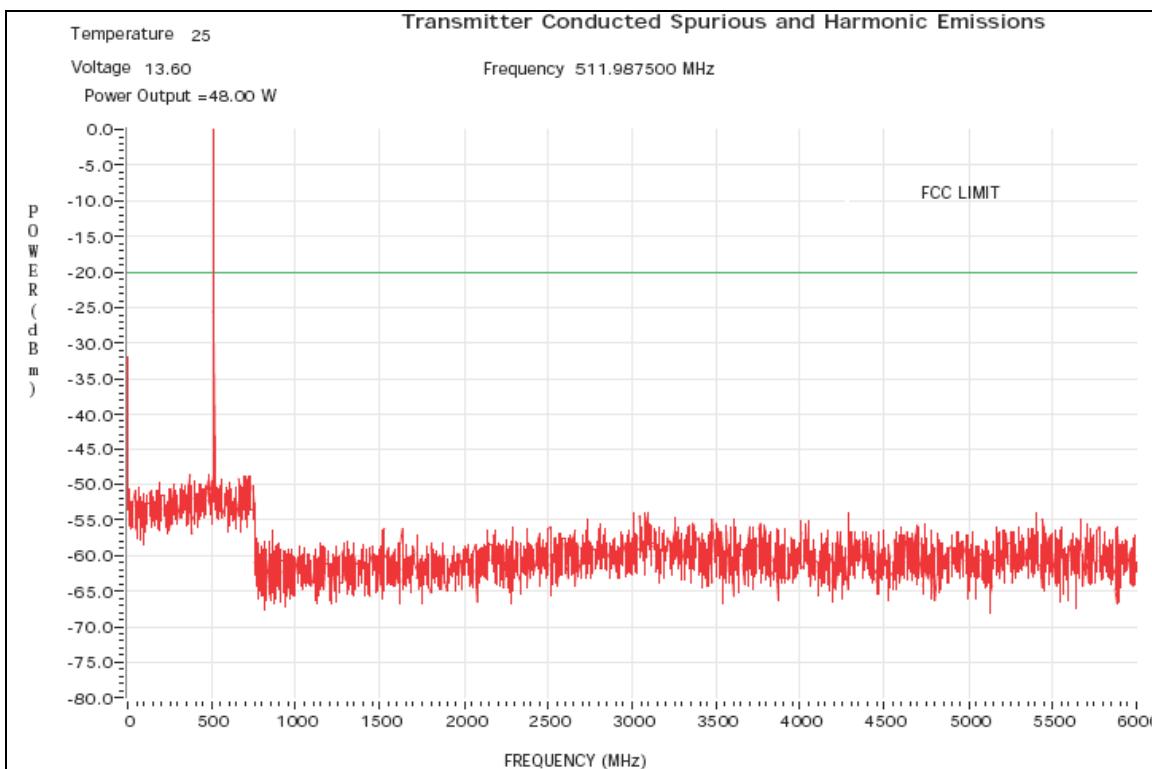


Figure 6F-35: 48W Harmonics of Carrier 511.9875 MHz, 12.5 kHz Channel Spacing

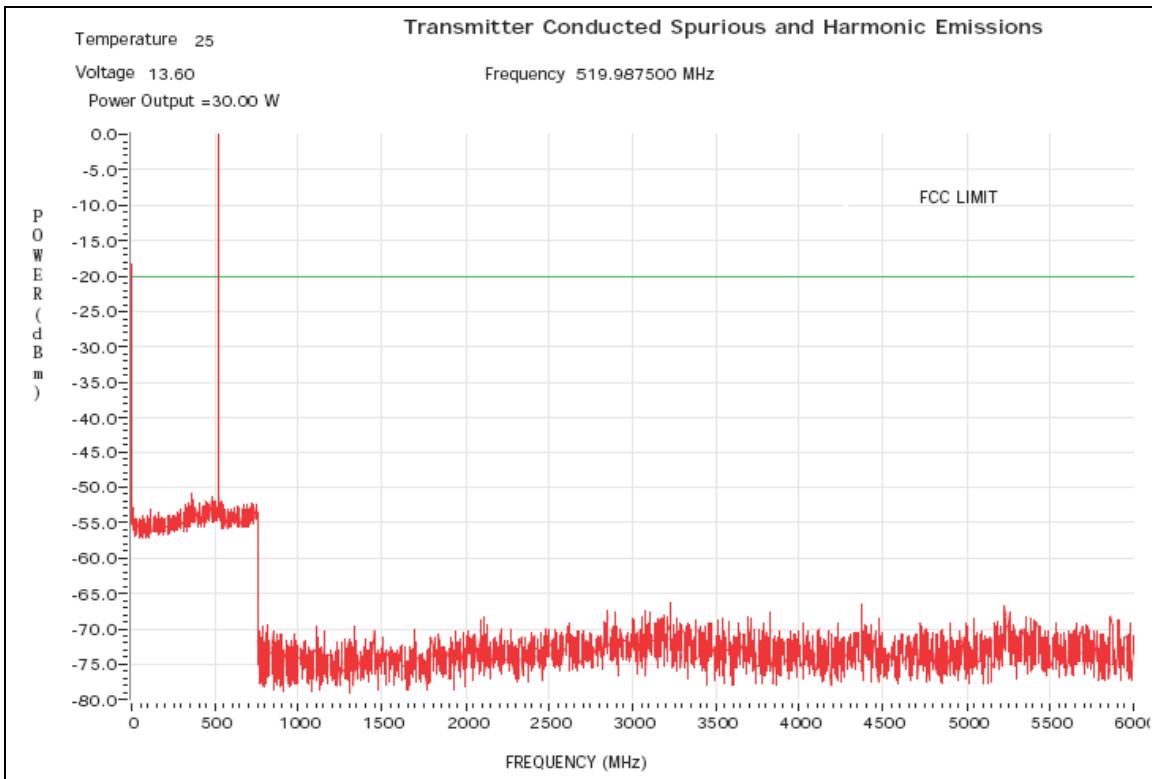


Figure 6F-36: 30W Harmonics of Carrier 519.9875 MHz, 12.5 kHz Channel Spacing

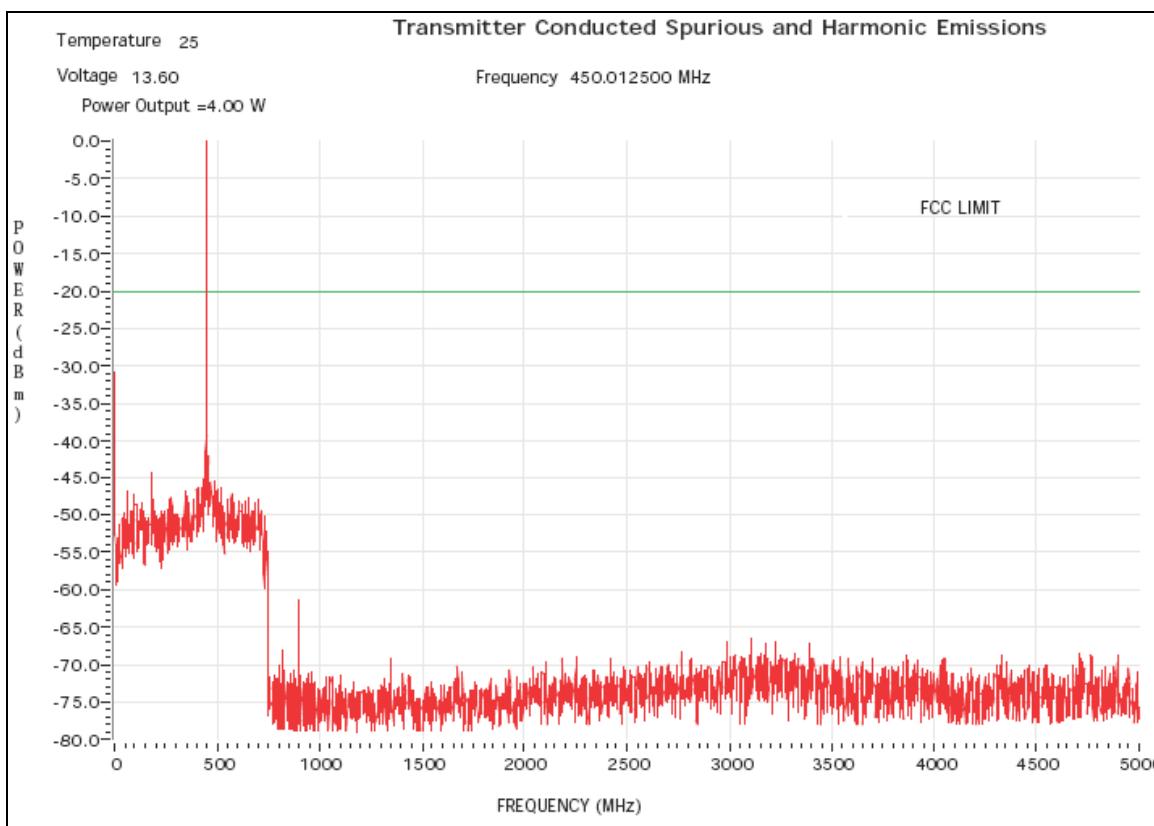


Figure 6F-37: 4W Harmonics of Carrier 450.0125 MHz, 12.5 kHz Channel Spacing

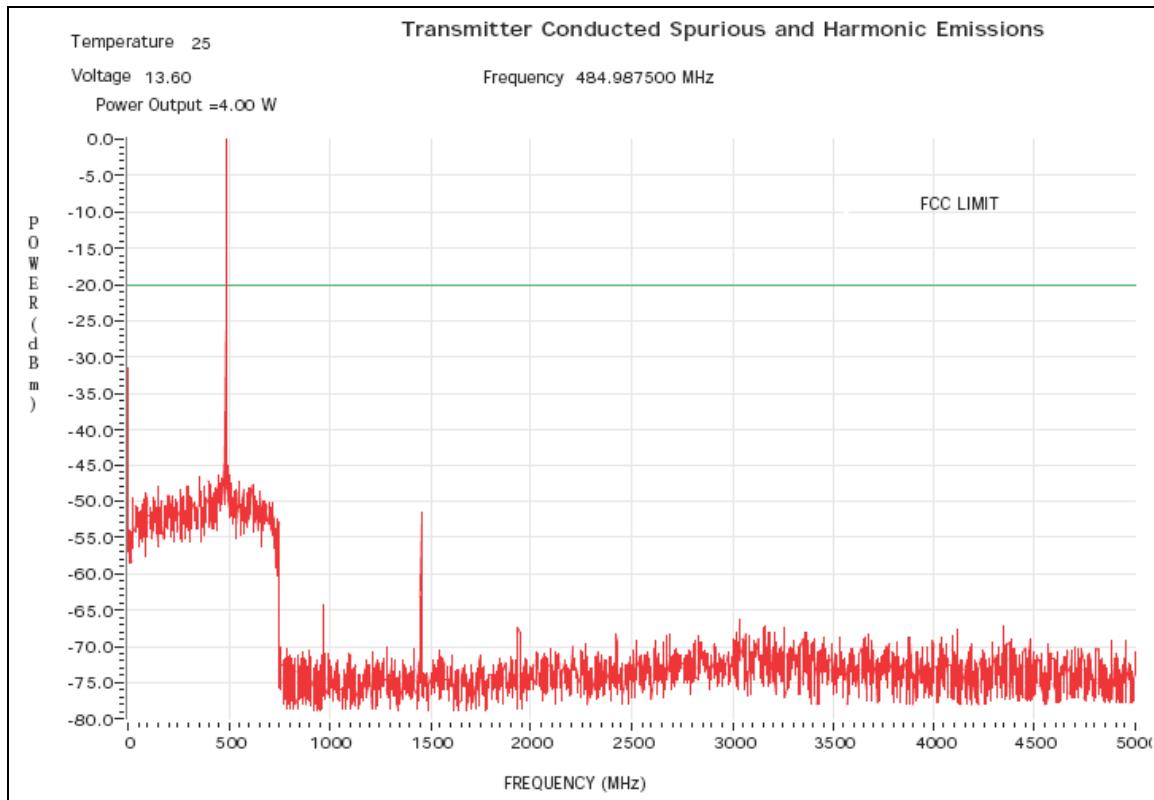


Figure 6F-38: 4W Harmonics of Carrier 484.9875 MHz, 12.5 kHz Channel Spacing

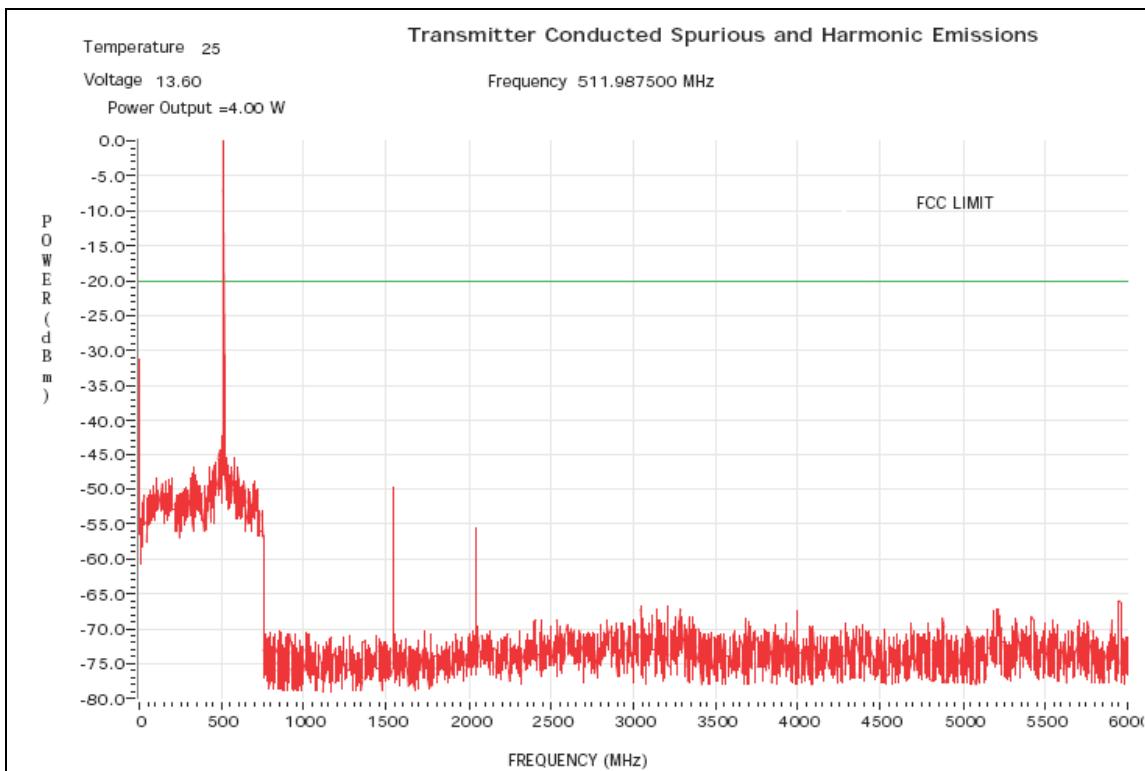


Figure 6F-39: 4W Harmonics of Carrier 511.9875 MHz, 12.5 kHz Channel Spacing

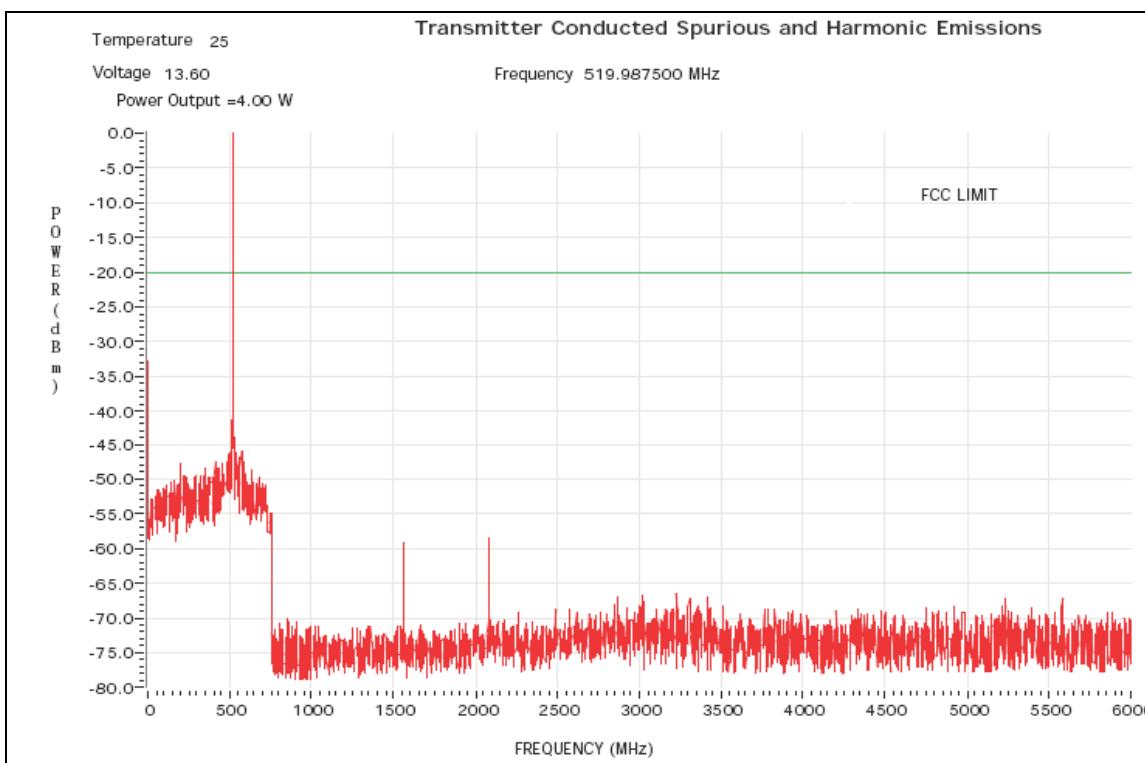


Figure 6F-40: 4W Harmonics of Carrier 519.9875 MHz, 12.5 kHz Channel Spacing

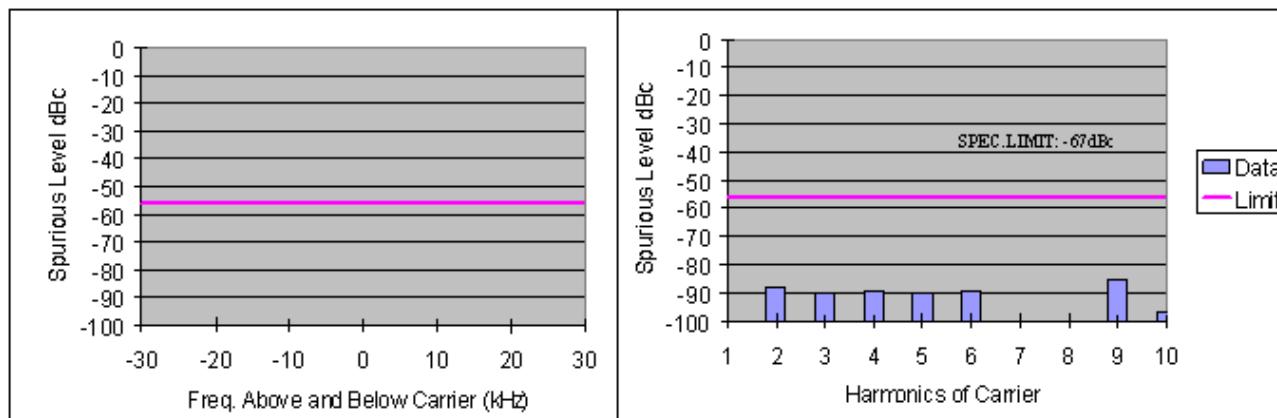


Figure 6F-41: 4W Harmonic of Carrier 380.0125 MHz

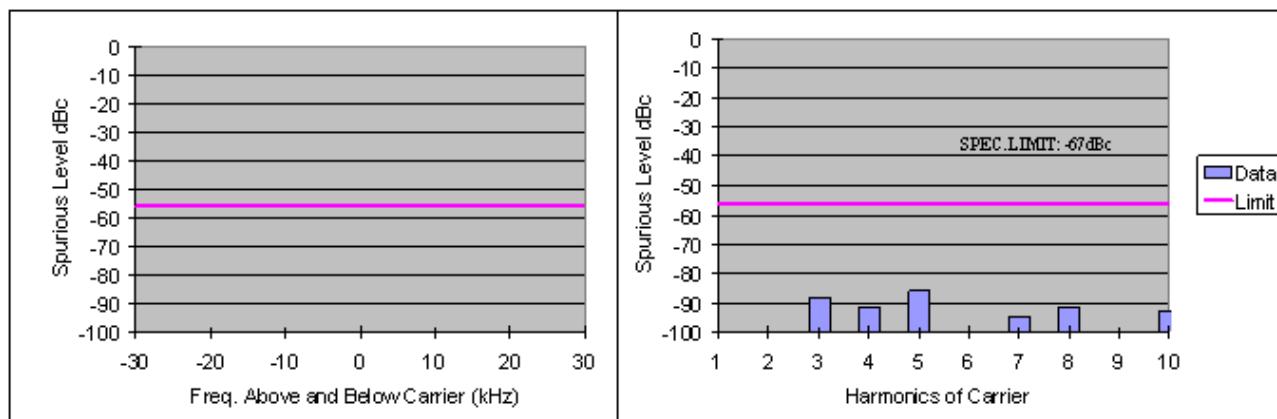


Figure 6F-42: 4W Harmonic of Carrier 406.2 MHz

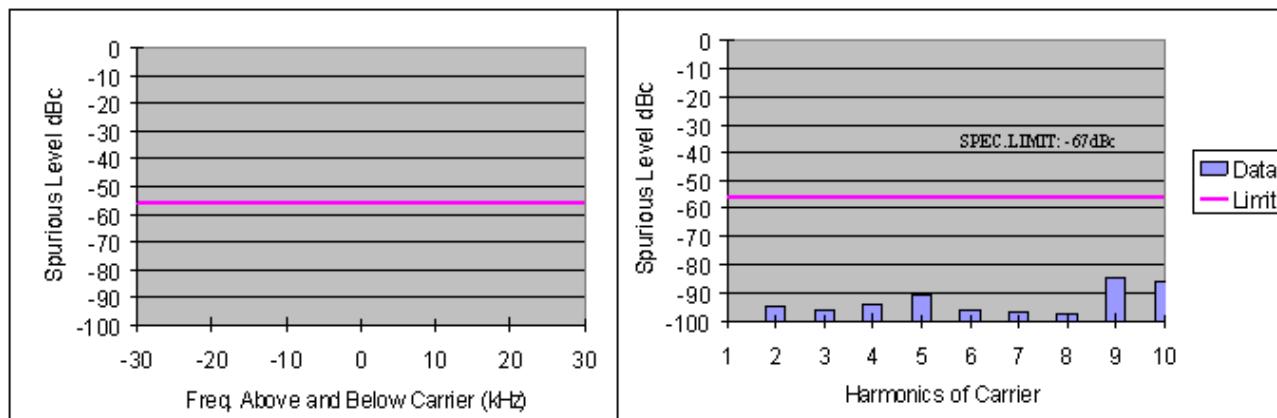


Figure 6F-43: 4W Harmonic of Carrier 425.0125 MHz

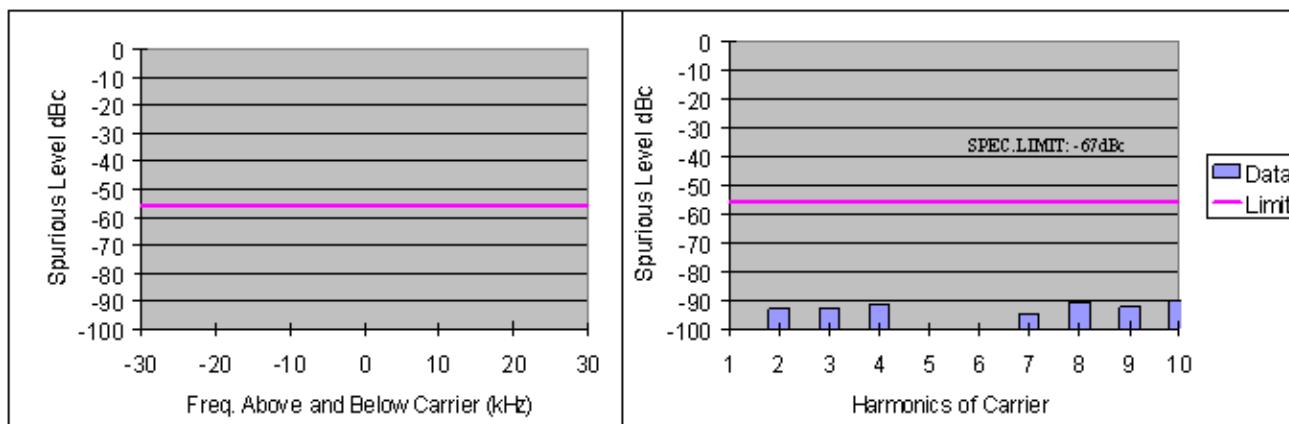


Figure 6F-44: 4W Harmonic of Carrier 469.9875 MHz

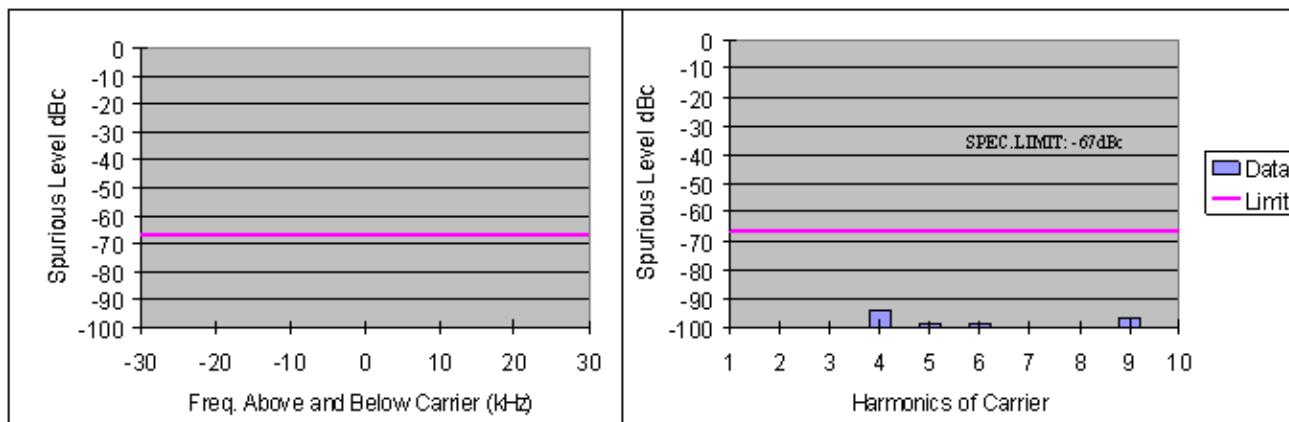


Figure 6F-45: 44W Harmonic of Carrier 380.0125 MHz

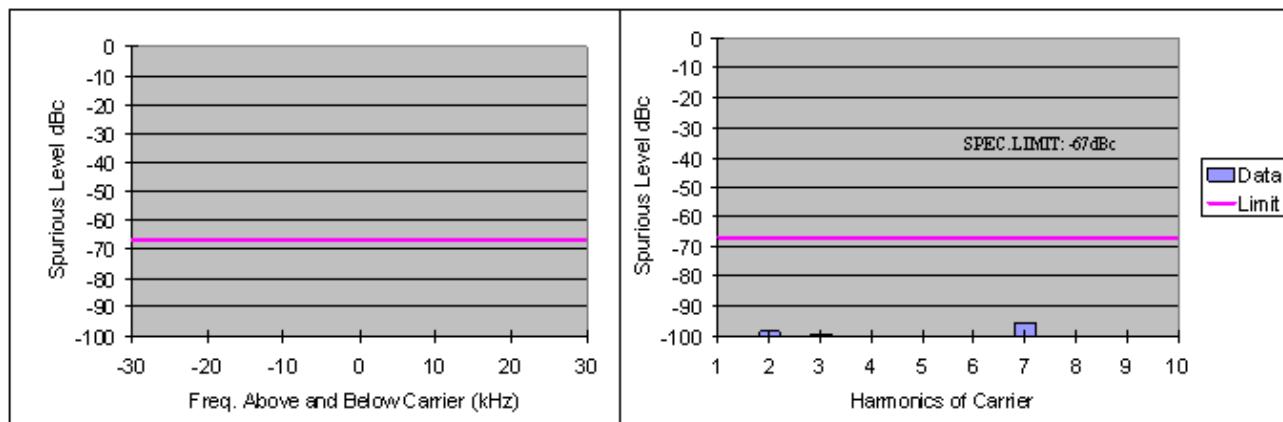


Figure 6F-46: 44W Harmonic of Carrier 406.2 MHz

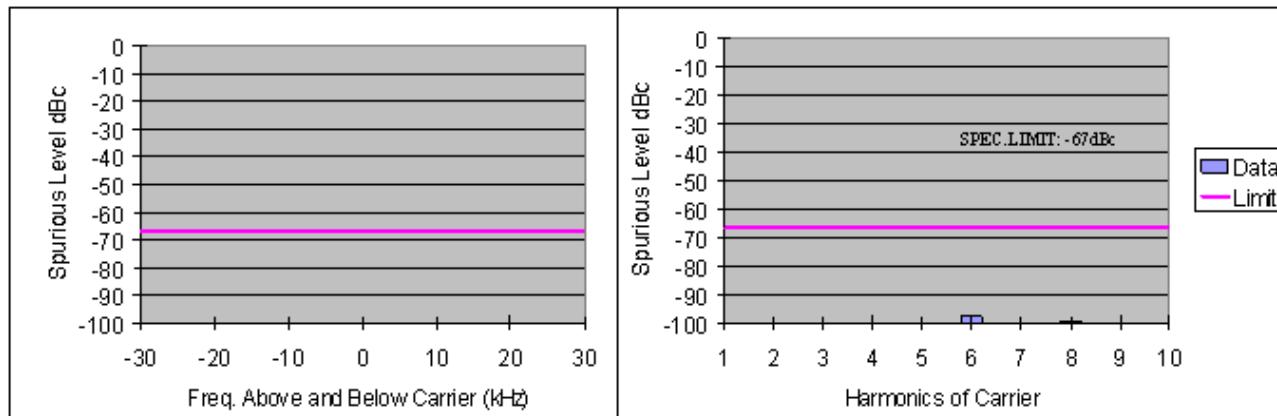


Figure 6F-47: 44W Harmonic of Carrier 425.0125 MHz

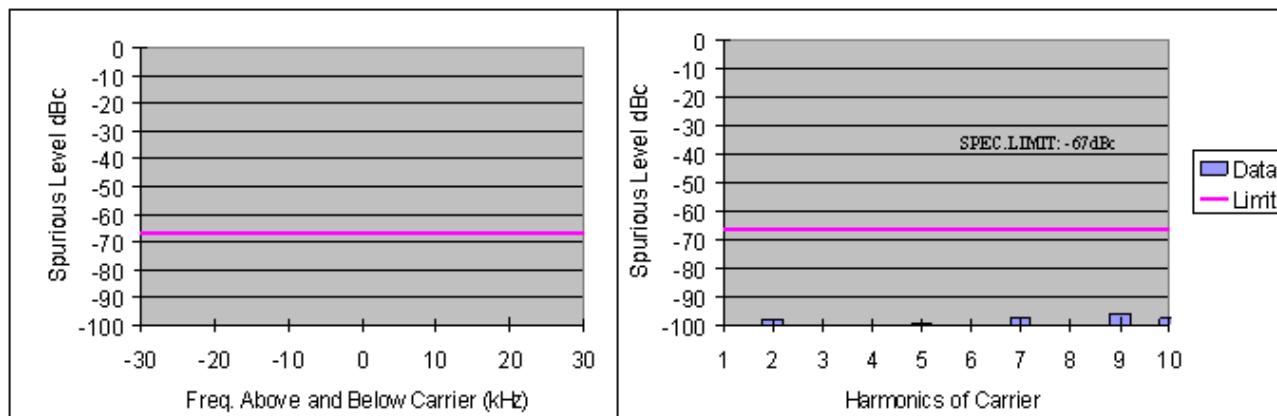


Figure 6F-48: 44W Harmonic of Carrier 469.9875 MHz

EXHIBIT 6G


Radiated Spurious Emissions - Pursuant 47 CFR 2.1051 and 2.1033(c)(13)

Analog Mode**Motorola Solutions****FCC ID:AZ492FT4904****Transmit Radiated Spurious Emissions: AP27600 MHUE1002A ANALOG**

Tx Power: 49.5 Watts

450.0125 MHz**Channel Spacing: 25kHz | SWR: CAN1100L34-J**


Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Spectral Power into Mixed Objects (dBm)	Vertical Measured Emission Spectral Power into Mixed Objects (dBm)
909.9700	-10	▲	▲
1404.9020	-10	■	■
1909.9300	-10	■	■
2424.9370	-10	■	■
2909.9230	-10	■	■
3084.9120	-10	■	■
3571.9000	-10	■	■
4046.8970	-10	■	■
4049.0700	-10	■	■

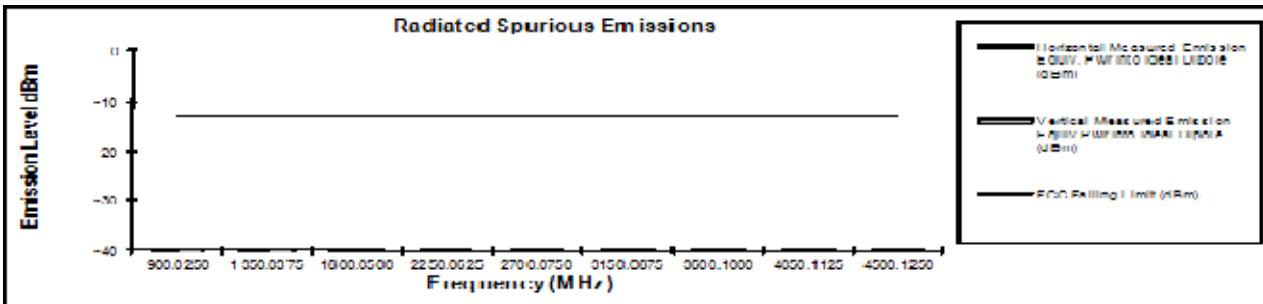**Transmit Radiated Spurious Emissions: AP27600 MHUE1002A ANALOG**

Tx Power: 44 Watts

484.9875 MHz**Channel Spacing: 25kHz | SWR: CAN1100L34-J**

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Spectral Power into Mixed Objects (dBm)	Vertical Measured Emission Spectral Power into Mixed Objects (dBm)
909.9700	-10	▲	▲
1404.9020	-10	■	■
1909.9300	-10	■	■
2424.9370	-10	■	■
2909.9230	-10	■	■
3084.9120	-10	■	■
3571.9000	-10	■	■
4046.8970	-10	■	■
4049.0700	-10	■	■

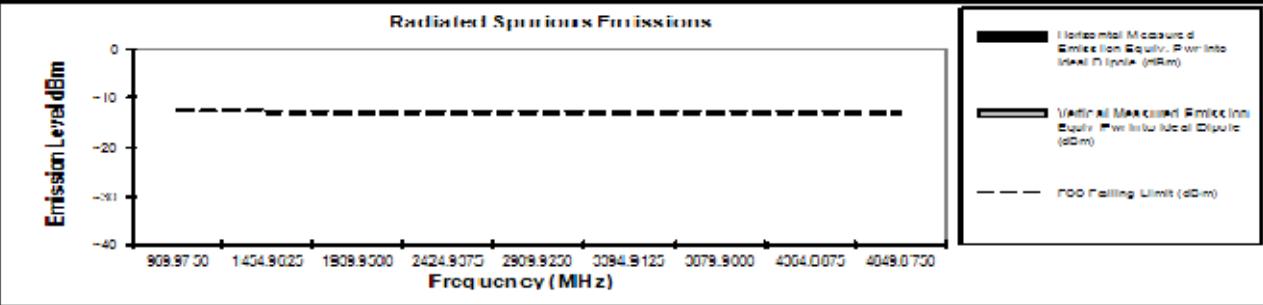

* Indicates the spurious emission could not be detected due to noise limitations or artifacts.

Pursuant to CFR 47 Part 2.1057(f), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the calibration method as found in the TI/VEA 603 document.

Motorola Planning FMC 1 sub - Test Performed by: Andy Fausner
FCC Registration: 01002 / Industry Commission: IC1000 1

October 31, 2011

Figure 6G-1: 49.5W & 44W, 450.0125 & 484.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7000 MHUH1002A ANALOG

Tx Power: 27.5 Watts

511.9875 MHz

Channel Spacing 25kHz | SWR CAM100L24-J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1023.9750	-10	•	•
1335.9825	-10	•	•
2047.9800	-10	•	•
2358.9875	-10	•	•
3071.9850	-10	•	•
3383.9825	-10	•	•
4095.9800	-10	•	•
4407.9875	-10	•	•
5119.9850	-10	•	•

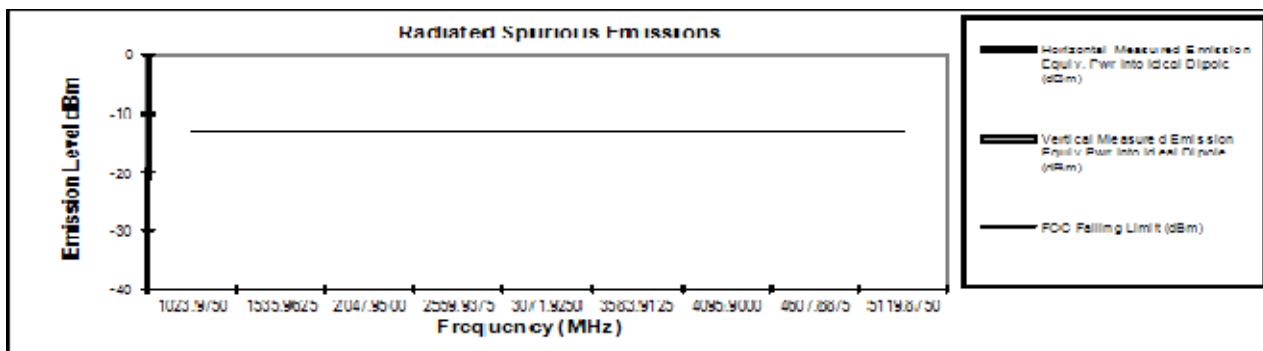


Transmit Radiated Spurious Emissions: APX7000 MHUH1002A ANALOG

Tx Power: 27.5 Watts

511.9875 MHz

Channel Spacing 25kHz | SWR CAM100L24-J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1023.9750	-10	•	•
1335.9825	-10	•	•
2047.9800	-10	•	•
2358.9875	-10	•	•
3071.9850	-10	•	•
3383.9825	-10	•	•
4095.9800	-10	•	•
4407.9875	-10	•	•
5119.9850	-10	•	•

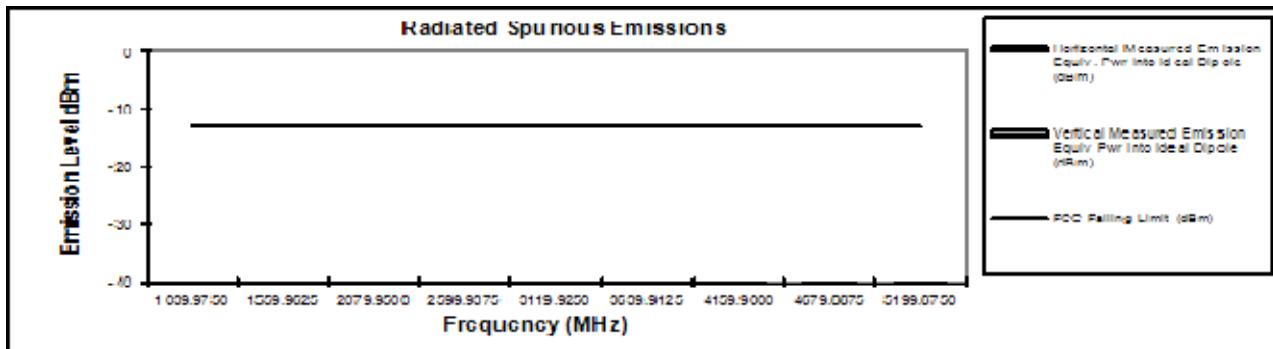

* Indicates the spurious emission could not be detected due to noise limitations or sensitivity.

Permit to CRTC 47 Part 2.1007(4), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the certification method as found in the TIA/EIA 803 document.
 Motorola Plantation EMC Lab Test Performed by Andy Gasser
 FCC Registration: 91932 / Industry Canada: IC1000U-4

October 31, 2011

Figure 6G-2: 27.5W, 511.9875 & 519.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

EXHIBIT 6

SHEET 46 OF 74

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A ANALOG

Tx Power: 4 Watts

450.0125 MHz

Channel Spacing 25kHz | 3W CDR100L34-J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
900.0200	-10	■	■
1000.0075	-10	■	■
1100.0050	-10	■	■
1200.0025	-10	■	■
1300.0000	-10	■	■
1400.0075	-10	■	■
1500.0050	-10	■	■
1600.0025	-10	■	■
1700.0000	-10	■	■
1800.0075	-10	■	■
1900.0050	-10	■	■
2000.0025	-10	■	■
2100.0000	-10	■	■
2200.0075	-10	■	■
2300.0050	-10	■	■
2400.0025	-10	■	■
2500.0000	-10	■	■
2600.0075	-10	■	■
2700.0050	-10	■	■
2800.0025	-10	■	■
2900.0000	-10	■	■
3000.0075	-10	■	■
3100.0050	-10	■	■
3200.0025	-10	■	■
3300.0000	-10	■	■
3400.0075	-10	■	■
3500.0050	-10	■	■
3600.0025	-10	■	■
3700.0000	-10	■	■
3800.0075	-10	■	■
3900.0050	-10	■	■
4000.0025	-10	■	■
4100.0000	-10	■	■
4200.0075	-10	■	■
4300.0050	-10	■	■
4400.0025	-10	■	■
4500.0000	-10	■	■

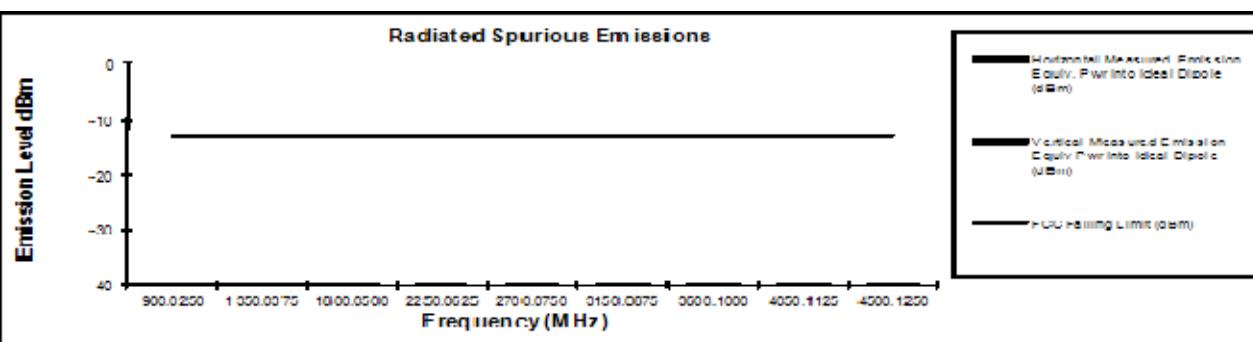


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A ANALOG

Tx Power: 4 Watts

484.9875 MHz

Channel Spacing 25kHz | 3W CDR100L34-J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)
900.0400	-10	■	■
1000.0375	-10	■	■
1100.0350	-10	■	■
1200.0325	-10	■	■
1300.0300	-10	■	■
1400.0275	-10	■	■
1500.0250	-10	■	■
1600.0225	-10	■	■
1700.0200	-10	■	■
1800.0175	-10	■	■
1900.0150	-10	■	■
2000.0125	-10	■	■
2100.0100	-10	■	■
2200.0075	-10	■	■
2300.0050	-10	■	■
2400.0025	-10	■	■
2500.0000	-10	■	■
2600.0075	-10	■	■
2700.0050	-10	■	■
2800.0025	-10	■	■
2900.0000	-10	■	■
3000.0075	-10	■	■
3100.0050	-10	■	■
3200.0025	-10	■	■
3300.0000	-10	■	■
3400.0075	-10	■	■
3500.0050	-10	■	■
3600.0025	-10	■	■
3700.0000	-10	■	■
3800.0075	-10	■	■
3900.0050	-10	■	■
4000.0025	-10	■	■
4100.0000	-10	■	■
4200.0075	-10	■	■
4300.0050	-10	■	■
4400.0025	-10	■	■
4500.0000	-10	■	■

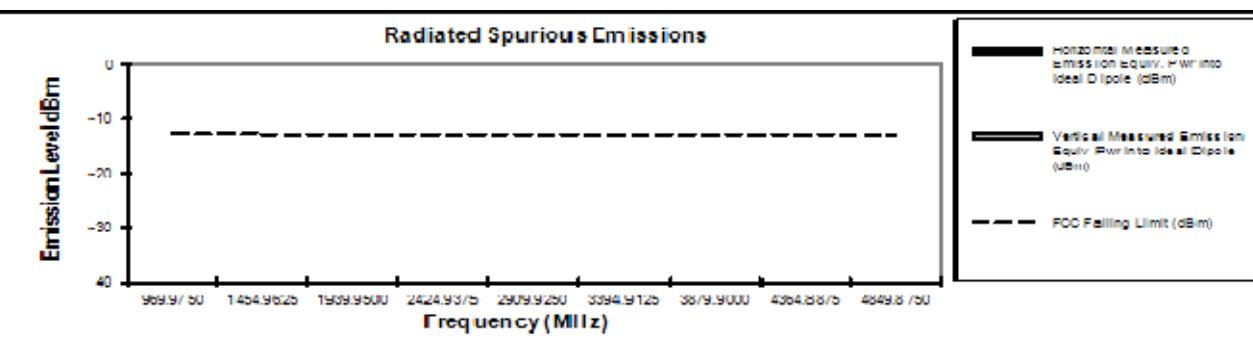

* Indicates the spectrum emission would not be detected due to noise limitation or sensitivity.

Permit to CRRA 47 Part 2.1007(d), emissions attenuated more than 20 dB below the permissable limit are not reported.

The data presented here was taken using the calibration method as found in the TIA/EIA 953 document.

Motorola Production EMC Lab - Test Performed by Andy Canner
FCC Registration: 91932 / Industry Canada: IC1000-4

October 31, 2011

Figure 6G-3: 4W, 450.0125 & 484.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A ANALOG

Tx Power: 4 Watts

511.9875 MHz

Channel Spacing 25kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
1023.9750	-10	•	•
1035.9625	-10	•	•
2047.9500	-10	•	•
3059.9375	-10	•	•
3111.9250	-10	•	•
3163.9125	-10	•	•
4065.9000	-10	•	•
4127.8875	-10	•	•
5111.8750	-10	•	•

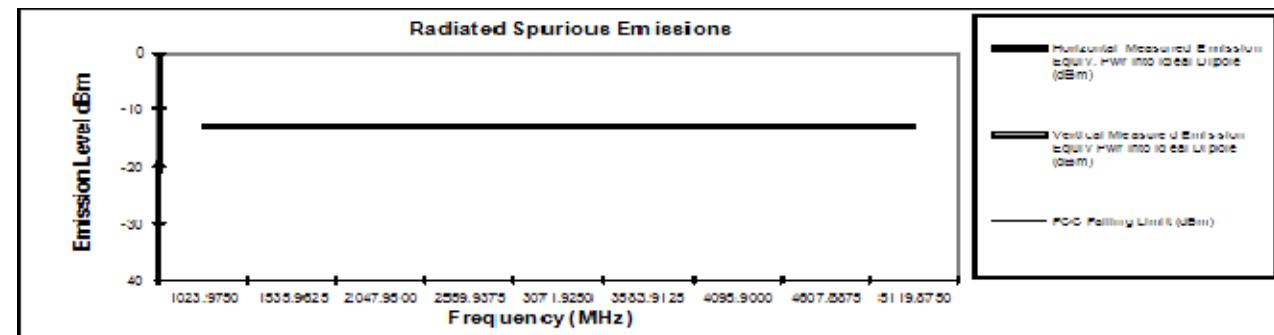


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A ANALOG

Tx Power: 4 Watts

511.9875 MHz

Channel Spacing 25kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
1023.9750	-10	•	•
1035.9625	-10	•	•
2047.9500	-10	•	•
3059.9375	-10	•	•
3111.9250	-10	•	•
3163.9125	-10	•	•
4065.9000	-10	•	•
4127.8875	-10	•	•
5111.8750	-10	•	•

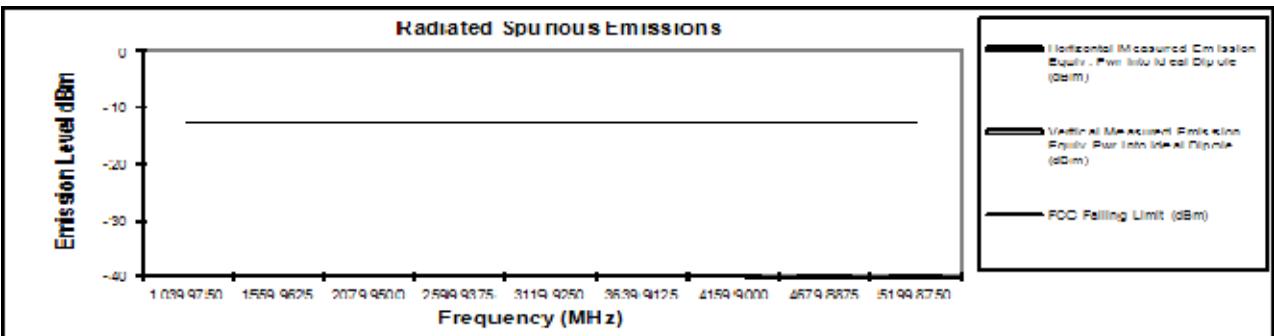

* Indicates the spurious emission could not be detected due to noise limitations or artifacts.

Permit to CFR 47 Part 2.1067(a), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the calibration method as found in the TIA/EIA 953 document.
Motorola Planning EMC Lab Test Performed by Andy Conner
FCC Registration: 2AB32 / Industry Canada: IC1000-4

October 31, 2011

Figure 6G-4: 4W, 511.9875 & 519.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7600 MHUE1002A.ANALOG

Tx Power: 48 Watts

380.0125 MHz

Channel Spacing 25kHz | SW CAM100.34.J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
760.0250	-13	*	*
1140.0375	-13	*	*
1520.0500	-13	*	*
1900.0625	-13	*	*
2280.0750	-13	*	*
2660.0875	-13	*	*
3040.1000	-13	*	*
3420.1125	-13	*	*
3800.1250	-13	*	*

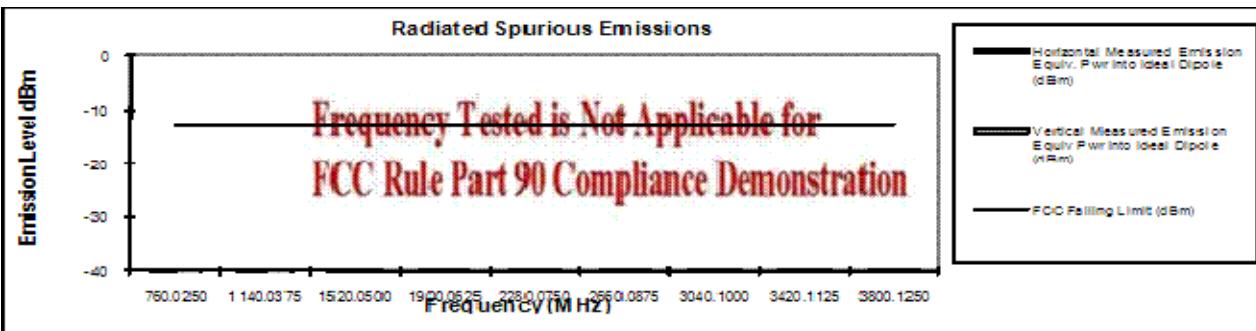


Transmit Radiated Spurious Emissions: APX7600 MHUE1002A.ANALOG

Tx Power: 48 Watts

406.2 MHz

Channel Spacing 25kHz | SW CAM100.34.J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
812.4000	-13	*	*
1218.6000	-13	*	*
1624.8000	-13	*	*
2031.0000	-13	*	*
2437.2000	-13	*	*
2843.4000	-13	*	*
3249.6000	-13	*	*
3655.8000	-13	*	*
4062.0000	-13	*	*

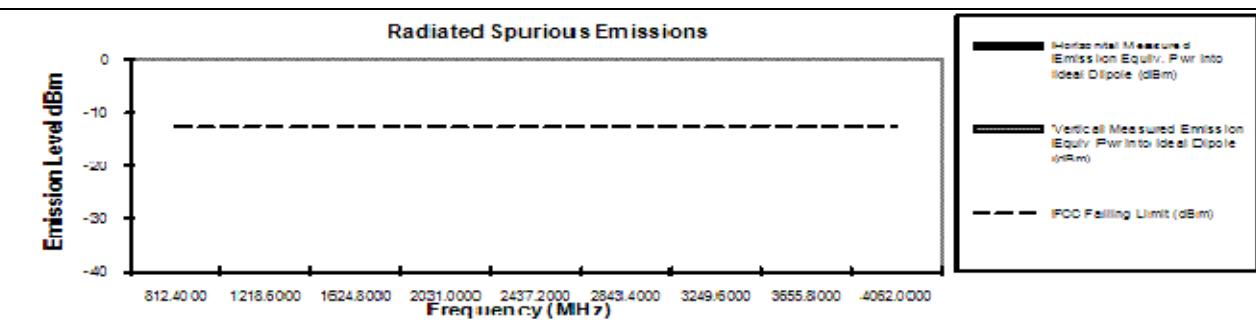

* Indicates the spurious emission could not be detected due to noise limitations or sensitivity.

Permit to CPT 47 Part 2.1 007 (d), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the calibration method as found in the TIA/EIA-653 document
Motorola Plantation EMC Lab – Test Performed by: Andy Geesner September 18, 2011
FCC Registration: 2AB32 / Industry Canada: IC10004-1

Figure 6G-5: 48W, 380.0125 & 406.2 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A ANALOG

Tx Power: 48 Watts

425.0125 MHz

Channel Spacing 25kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
650.0250	-13	*	*
1275.0375	-13	*	*
1700.0500	-13	*	*
2125.0625	-13	*	*
2550.0750	-13	*	*
2975.0875	-13	*	*
3400.1000	-13	*	*
3825.1125	-13	*	*
4250.1250	-13	*	*

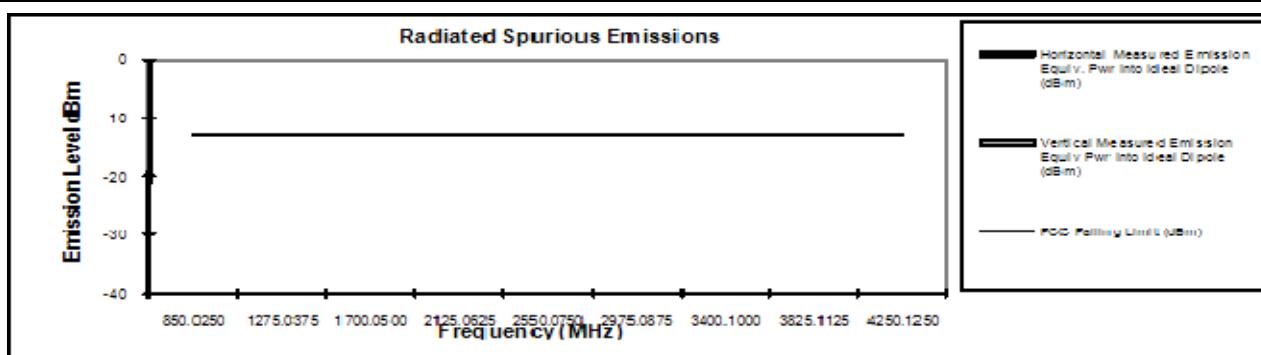


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A ANALOG

Tx Power: 48 Watts

469.9875 MHz

Channel Spacing 25kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
939.9750	-13	*	*
1409.9625	-13	*	*
1879.9500	-13	*	*
2349.9375	-13	*	*
2819.9250	-13	*	*
3289.9125	-13	*	*
3759.9000	-13	*	*
4229.8875	-13	*	*
4699.8750	-13	*	*

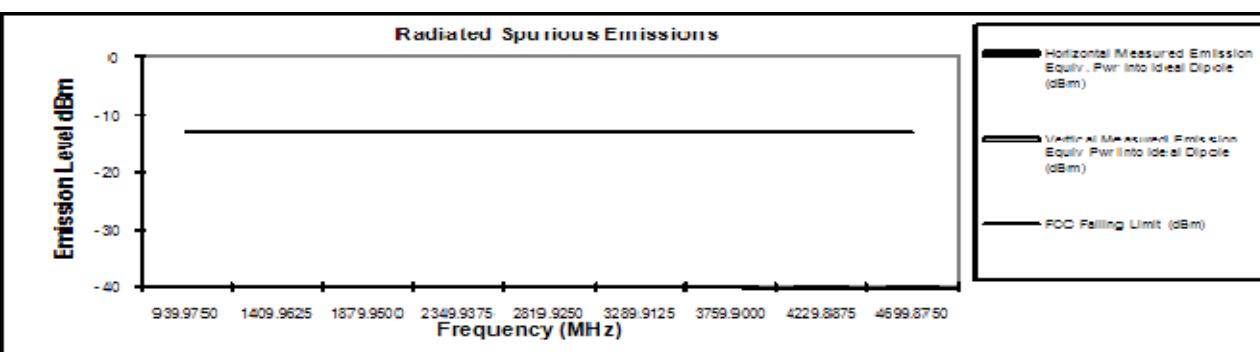

* Indicates the spurious emission could not be detected due to noise limitations or artifacts.

Permittee CFR 47 Part 2.1067(e), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Planning EMC Lab - Test Performed by: Andy Gossner
 FCC Registration: 91932 / Industry Canada: IC1000U-1

September 18, 2011

Figure 6G-6: 48W, 425.0125 & 469.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7650 MHUE1602A.ANALOG

Tx Power: 4 Watts

380.0125 MHz

Channel Spacing 25kHz | SWI CAM16034J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
760.0250	-13	-	-
1140.0375	-13	-	-
1520.0500	-13	-	-
1900.0625	-13	-	-
2280.0750	-13	-	-
2660.0875	-13	-	-
3040.1000	-13	-	-
3420.1125	-13	-	-
3800.1250	-13	-	-

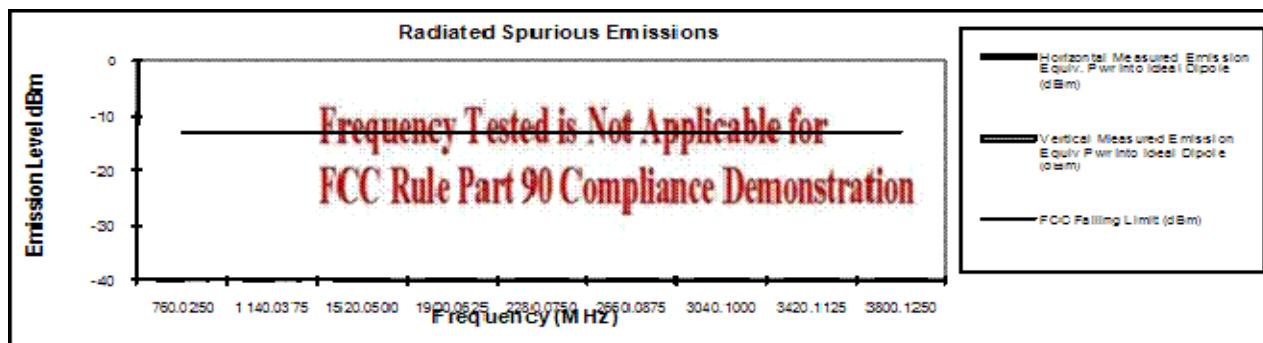


Transmit Radiated Spurious Emissions: APX7650 MHUE1602A.ANALOG

Tx Power: 4 Watts

406.2 MHz

Channel Spacing 25kHz | SWI CAM16034J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
812.4000	-13	-	-
1216.6000	-13	-	-
1624.8000	-13	-	-
2031.0000	-13	-	-
2437.2000	-13	-	-
2843.4000	-13	-	-
3249.6000	-13	-	-
3655.8000	-13	-	-
4062.0000	-13	-	-

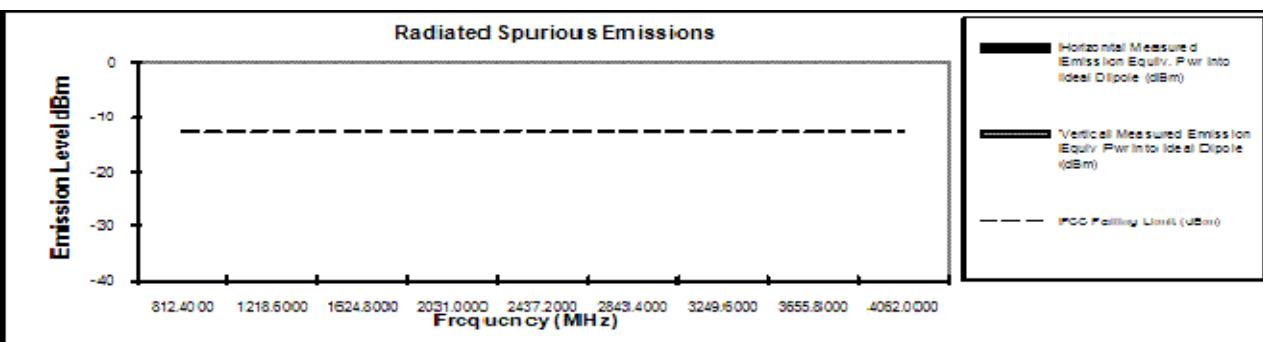

* Indicate the spurious emission could not be detected due to noise limitations or sensitivity.

Permissive CFR 47 Part 2.1067(a), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the calibration method as found in the TIA/EIA-653 document.
 Motorola Planning EMC Lab - Test Performed by: Andy Gammie
 FCC Registration: 91932 / Industry Canada: IC16004-1

September 18, 2011

Figure 6G-7: 4W, 380.0125 & 406.2 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A ANALOG

Tx Power: 4 Watts

425.0125 MHz

Channel Spacing 25kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equip. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equip. Pwr into Ideal Dipole (dBm)
850.0250	-13	-	-
1225.0375	-13	-	-
1700.0500	-13	-	-
2125.0625	-13	-	-
2550.0750	-13	-	-
2975.0875	-13	-	-
3400.1000	-13	-	-
3825.1125	-13	-	-
4250.1250	-13	-	-

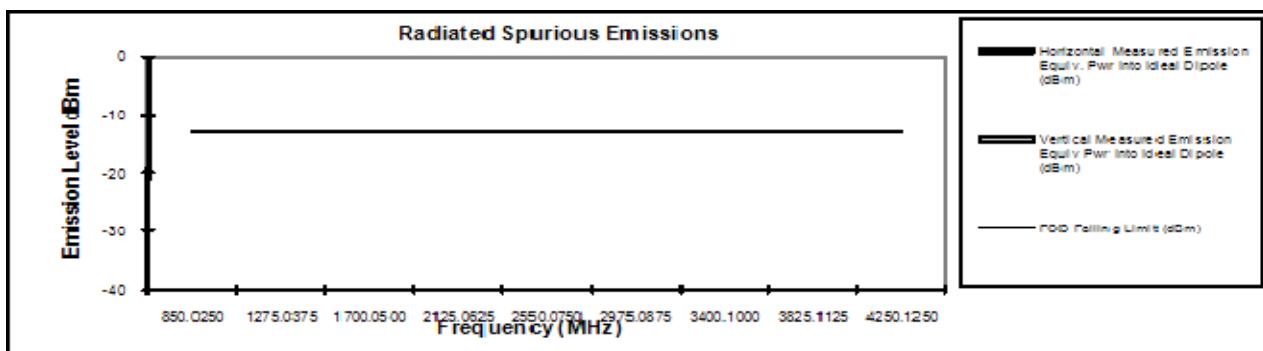


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A ANALOG

Tx Power: 4 Watts

469.9875 MHz

Channel Spacing 25kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equip. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equip. Pwr into Ideal Dipole (dBm)
850.0250	-13	-	-
1400.0375	-13	-	-
1950.0500	-13	-	-
2500.0625	-13	-	-
3050.0750	-13	-	-
3600.0875	-13	-	-
4250.1000	-13	-	-

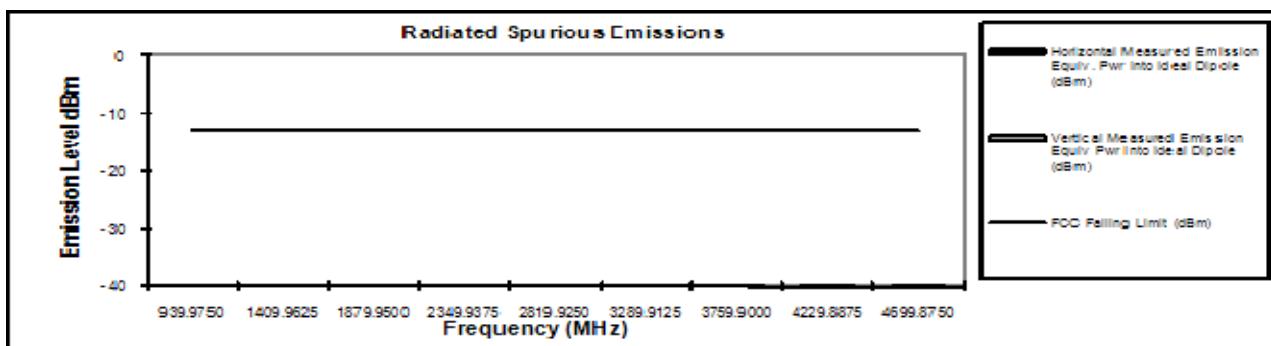

* Indicates the spectrum emission could not be detected due to noise limitation or ambient.

Permit to CFR 47 Part 2.1067(a), emissions estimated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the certification method as found in the TIA/EIA-603 document.
 Motorola Planning EMC Lab Test: Performed by Andy Gossner
 FCC Registration: 91932 / Industry Canada: IC1000-1

September 16, 2011

Figure 6G-8: 4W, 425.0125 & 469.9875 MHz, 25 kHz Channel Spacing (Not for FCC Review)

Digital Mode

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7600 MHUE1002A DIGITAL

Tx Power: 40.5 Watts

450.0125 MHz

Channel Spacing 12.5kHz | SW CAN100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr into Ideal Dipole (dBm)
900.0250	-20	■	■
1350.0375	-20	■	■
1800.0500	-20	■	■
2250.0625	-20	■	■
2700.0750	-20	■	■
3150.0875	-20	■	■
3600.1000	-20	■	■
4050.1125	-20	■	■
4500.1250	-20	■	■

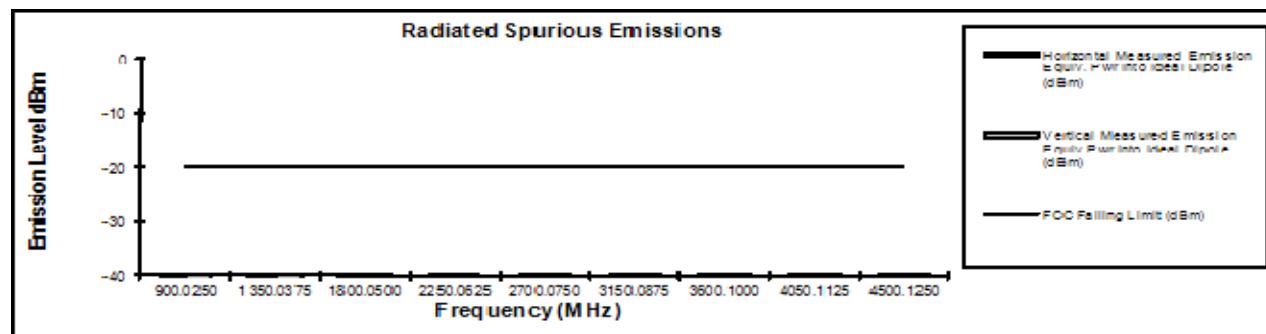


Transmit Radiated Spurious Emissions: APX7600 MHUE1002A DIGITAL

Tx Power: 44 Watts

484.9875 MHz

Channel Spacing 12.5kHz | SW CAN100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr into Ideal Dipole (dBm)
900.0750	-20	■	■
1454.9875	-20	■	■
1909.9000	-20	■	■
2364.9125	-20	■	■
2819.9250	-20	■	■
3274.9375	-20	■	■
3729.9500	-20	■	■
4184.9625	-20	■	■
4639.9750	-20	■	■

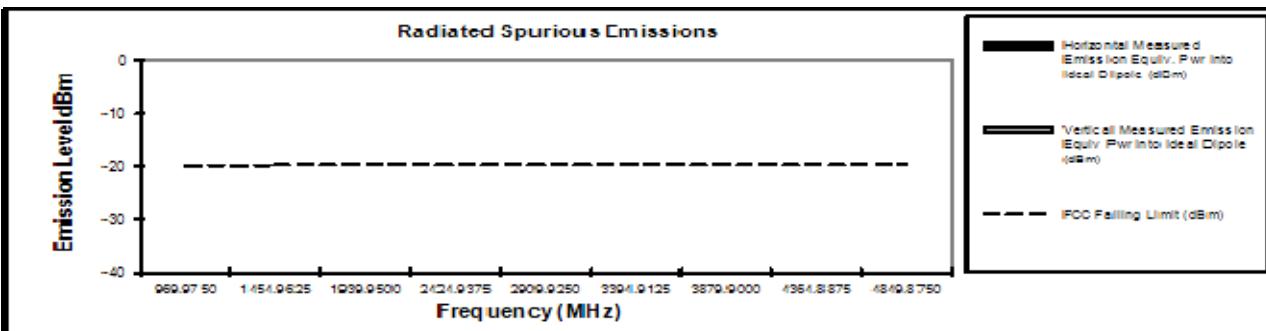

* Indication that a spurious emission could not be detected due to noise limitations or sensitivity.

Permissive CFR 47 Part 2.1067(a), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-953 document.
 Motorola Planning EMC Lab – Test Performed by: Andy Gassner
 FCC Registration: 2AB32 / Industry Canada: IC1000U-4

October 31, 2011

Figure 6G-9: 49.5W & 44W, 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL.

Tx Power: 27.5 Watts


511.9875 MHz		Channel Spacing 12.5kHz SWR CAM100L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equip. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equip. Pwr into Ideal Dipole (dBm)
1023.9750	-20	*	*
1535.9625	-20	*	*
2047.9500	-20	*	*
2559.9375	-20	*	*
3071.9250	-20	*	*
3583.9125	-20	*	*
4095.9000	-20	*	*
4607.8875	-20	*	*
5119.8750	-20	*	*

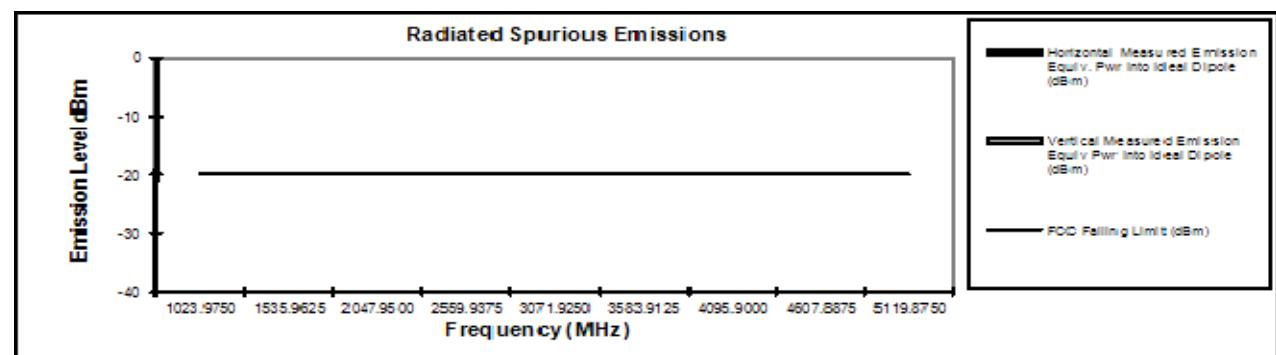

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL.

Tx Power: 27.5 Watts

519.9875 MHz		Channel Spacing 12.5kHz SWR CAM100L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equip. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equip. Pwr into Ideal Dipole (dBm)
1039.9750	-20	*	*
1559.9625	-20	*	*
2079.9500	-20	*	*
2599.9375	-20	*	*
3119.9250	-20	*	*
3639.9125	-20	*	*
4159.9000	-20	*	*
4679.8875	-20	*	*
5119.8750	-20	*	*

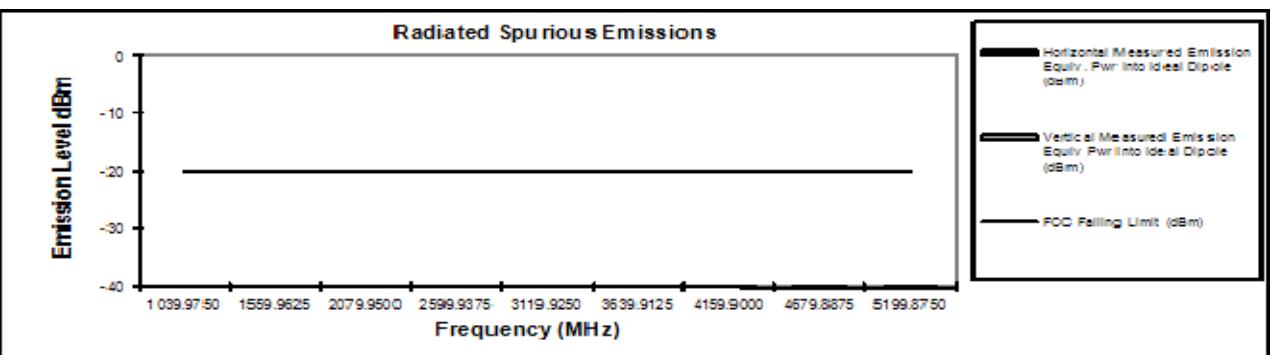

* indicates the spurious emission could not be detected due to noise limitations or artifacts.

Permissible CRTC 47 Part 2.1057(a), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Production EMC Lab - Test Performed by: Andy Gassner
 FCC Registration: 51932 / Industry Canada: IC1000U-1

October 31, 2011

Figure 6G-10: 27.5W, 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A DIGITAL

Tx Power: 4 Watts

450.0125 MHz

Channel Spacing 12.5kHz | SWR CAM100L34-J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
900.0250	-20	-	-
1350.0375	-20	-	-
1800.0500	-20	-	-
2250.0625	-20	-	-
2700.0750	-20	-	-
3150.0875	-20	-	-
3600.1000	-20	-	-
4050.1125	-20	-	-
4500.1250	-20	-	-

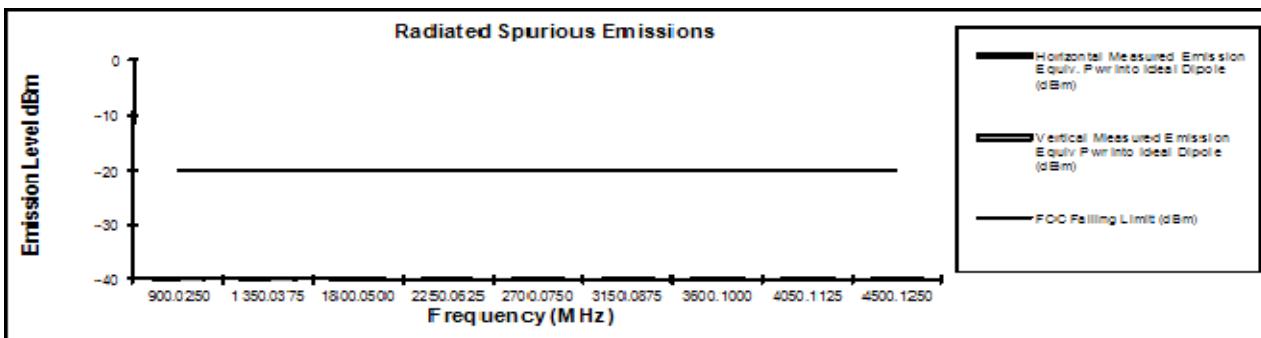


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A DIGITAL

Tx Power: 4 Watts

484.9875 MHz

Channel Spacing 12.5kHz | SWR CAM100L34-J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
900.9750	-20	-	-
1454.9625	-20	-	-
1909.9500	-20	-	-
2364.9375	-20	-	-
2819.9250	-20	-	-
3274.9125	-20	-	-
3729.9000	-20	-	-
4184.8875	-20	-	-
4639.8750	-20	-	-

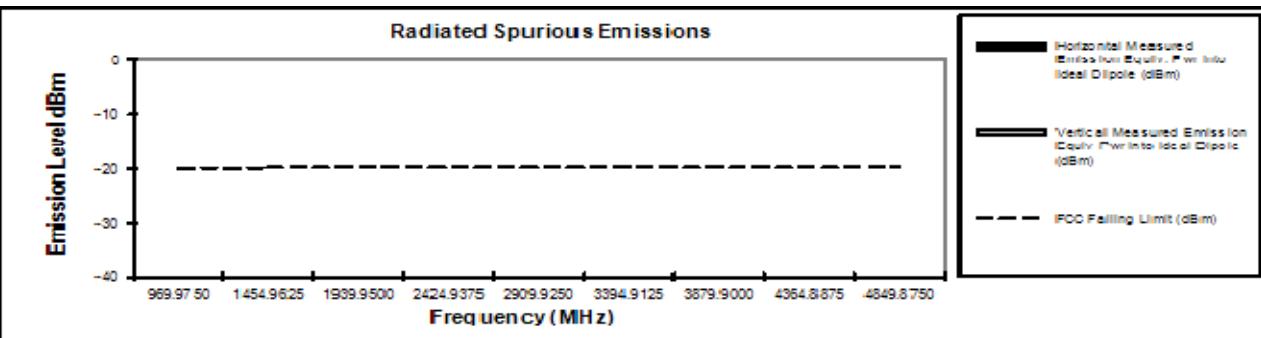

* Indicates the spectrum analyzer could not be detected due to noise limitations or conditions.

Permissible CFR 47 Part 2.1057(a), emissions estimated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-653 document.
 Motorola Plantation EMC Lab - Test Performed by: Andy Gassner
 FCC Registration: 91932 / Industry Canada: IC1000U-1

October 31, 2011

Figure 6G-11: 4W, 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7800 MHUE1002A DIGITAL

Tx Power: 4 Watts

511.9875 MHz

Channel Spacing 12.5kHz | SWR CAM190L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr into Ideal Dipole (dBm)
1023.9750	-20	-	-
1535.9625	-20	-	-
2047.9500	-20	-	-
2559.9375	-20	-	-
3071.9250	-20	-	-
3583.9125	-20	-	-
4095.9000	-20	-	-
4607.8875	-20	-	-
5119.8750	-20	-	-

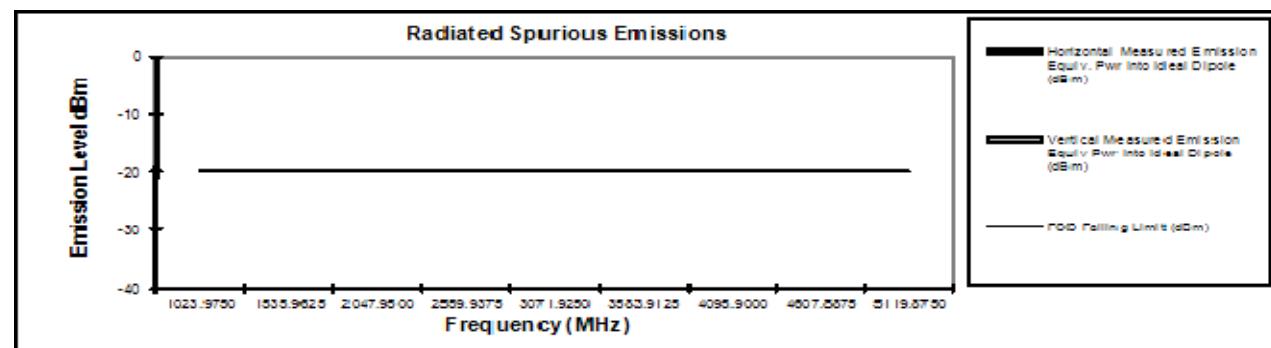


Transmit Radiated Spurious Emissions: APX7800 MHUE1002A DIGITAL

Tx Power: 4 Watts

519.9875 MHz

Channel Spacing 12.5kHz | SWR CAM190L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv. Pwr into Ideal Dipole (dBm)
1023.9750	-20	-	-
1535.9625	-20	-	-
2047.9500	-20	-	-
2559.9375	-20	-	-
3071.9250	-20	-	-
3583.9125	-20	-	-
4095.9000	-20	-	-
4607.8875	-20	-	-
5119.8750	-20	-	-

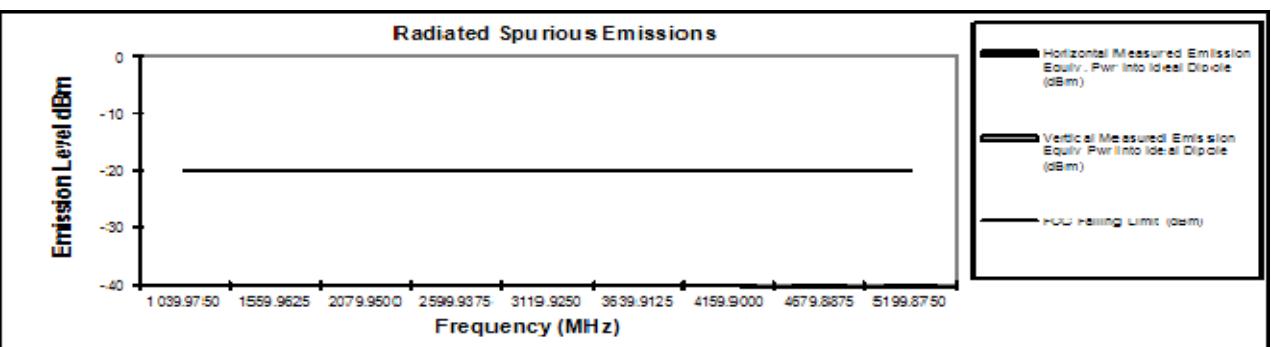

* Indicates the spurious emission could not be detected due to noise limitations or artifacts.

Permit to CFR 47 Part 2.1067(e), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the measurement method as found in the TIA/EIA-803 document.
 Motorola Production EMC Lab - Test Performed by: Andy Gassner
 FCC Registration: 91932 / Industry Canada: IC1060U-1

October 31, 2011

Figure 6G-12: 4W, 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL

Tx Power: 48 Watts

380.0125 MHz

Channel Spacing 12.5kHz | SWR CAM100.34.J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
760.0260	-20	*	*
1140.0375	-20	*	*
1520.0500	-20	*	*
1900.0625	-20	*	*
2280.0750	-20	*	*
2660.0875	-20	*	*
3040.1000	-20	*	*
3420.1125	-20	*	*
3800.1250	-20	*	*




Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL

Tx Power: 48 Watts

406.2 MHz

Channel Spacing 12.5kHz | SWR CAM100.34.J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
812.4000	-20	*	*
1218.6000	-20	*	*
1624.8000	-20	*	*
2031.0000	-20	*	*
2437.2000	-20	*	*
2843.4000	-20	*	*
3249.6000	-20	*	*
3655.8000	-20	*	*
4062.0000	-20	*	*

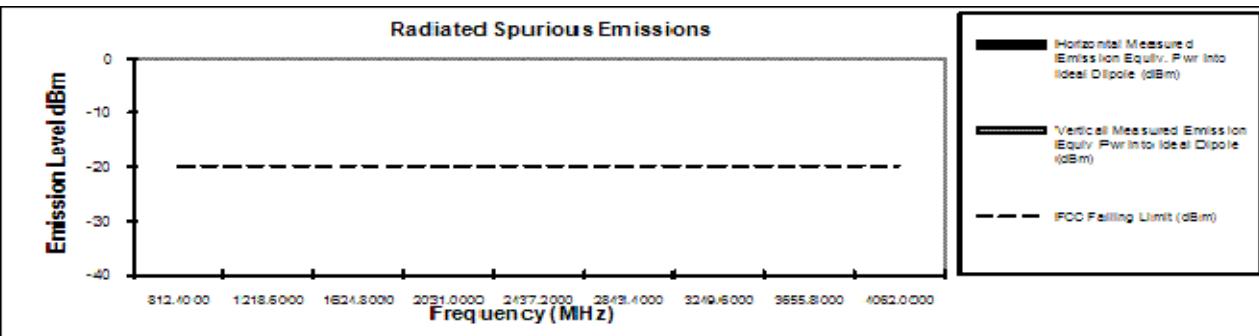

* Indicates the spurious emission could not be detected due to noise limitations or sensitivity.

Permissible CFR 47 Part 2.1057(a), emissions attenuated more than 20 dB below the permissible limit are not required.

The data presented here was taken using the calibration method as found in the TIA/EIA-603 document.
 Motorola Production EMC Lab – Test Performed by: Andy Gassner
 FCC Registration: 91932 / Industry Canada: IC1660-4

September 18, 2011

Figure 6G-13: 48W, 380.0125 MHz & 406.2, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL

Tx Power: 48 Watts


425.0125 MHz		Channel Spacing 12.5kHz SWR CAM100L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
650.0250	-20	-	-
1275.0375	-20	-	-
1700.0500	-20	-	-
2125.0625	-20	-	-
2550.0750	-20	-	-
2975.0875	-20	-	-
3400.1000	-20	-	-
3825.1125	-20	-	-
4250.1250	-20	-	-

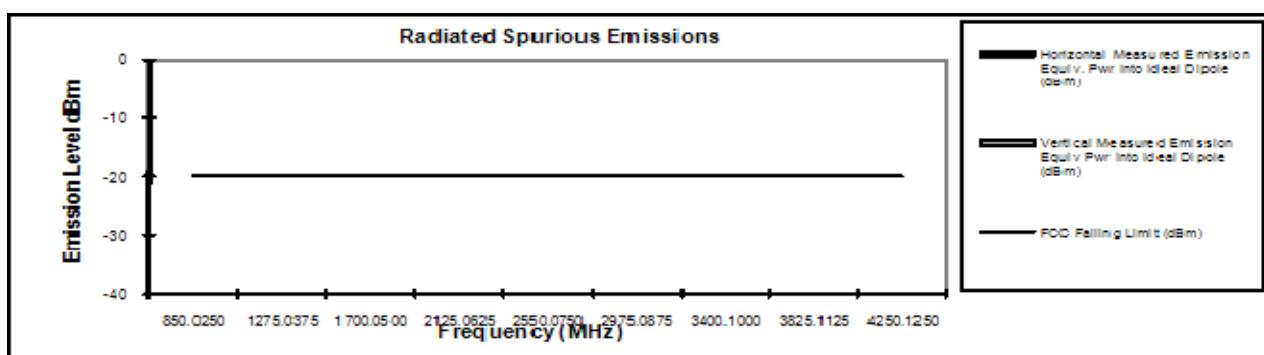

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL

Tx Power: 48 Watts

469.9875 MHz		Channel Spacing 12.5kHz SWR CAM100L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
839.9750	-20	-	-
1409.9625	-20	-	-
1879.9500	-20	-	-
2349.9375	-20	-	-
2819.9250	-20	-	-
3289.9125	-20	-	-
3759.9000	-20	-	-
4229.8875	-20	-	-
4699.8750	-20	-	-

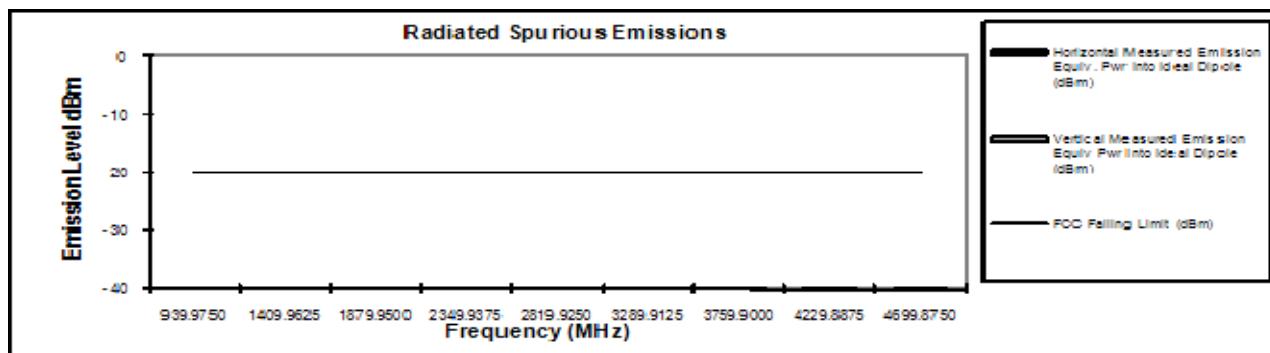

* Indicates the emission emission could not be detected due to noise limitations or artifacts.

Permissible CRTC 47 Part 2.1057(a), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Production EMC Lab – Test Performed by: Andy Gassner
 FCC Registration: 91932 / Industry Canada: IC1000U-4

Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL

Tx Power: 4 Watts

380.0125 MHz

Channel Spacing 12.5kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
760.0250	-20	-	-
1140.0375	-20	-	-
1520.0500	-20	-	-
1900.0625	-20	-	-
2280.0750	-20	-	-
2660.0875	-20	-	-
3040.1000	-20	-	-
3420.1125	-20	-	-
3800.1250	-20	-	-




Transmit Radiated Spurious Emissions: APX7500 MHUE1002A DIGITAL

Tx Power: 4 Watts

406.2 MHz

Channel Spacing 12.5kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
812.4000	-20	-	-
1218.6000	-20	-	-
1624.8000	-20	-	-
2031.0000	-20	-	-
2437.2000	-20	-	-
2843.4000	-20	-	-
3249.6000	-20	-	-
3655.8000	-20	-	-
4062.0000	-20	-	-

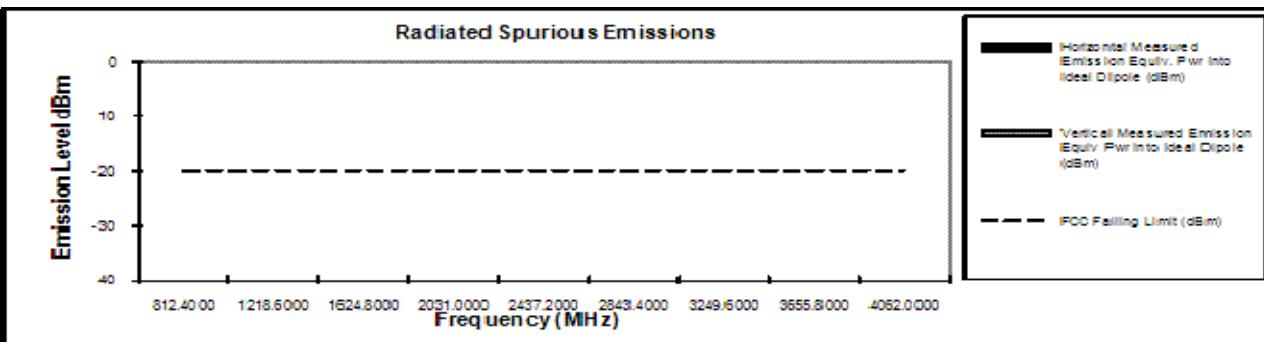

* Indicates the spurious emission could not be detected due to noise limitations or sensitivity.

Permissible CPT 47 Part 2.1 057(a), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the measurement method as found in the TIA/EIA-653 document
Motorola Production EMC Lab - Test: Performed by: Andy Gassner
FCC Registration: 91932 / Industry Canada: IC1660-4

September 18, 2011

Figure 6G-15: 4W, 380.0125 MHz & 406.2, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A DIGITAL

Tx Power: 4 Watts

425.0125 MHz

Channel Spacing 12.5kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-20	-	-
1225.0375	-20	-	-
1700.0500	-20	-	-
2125.0625	-20	-	-
2550.0750	-20	-	-
2975.0875	-20	-	-
3400.1000	-20	-	-
3825.1125	-20	-	-
4250.1250	-20	-	-

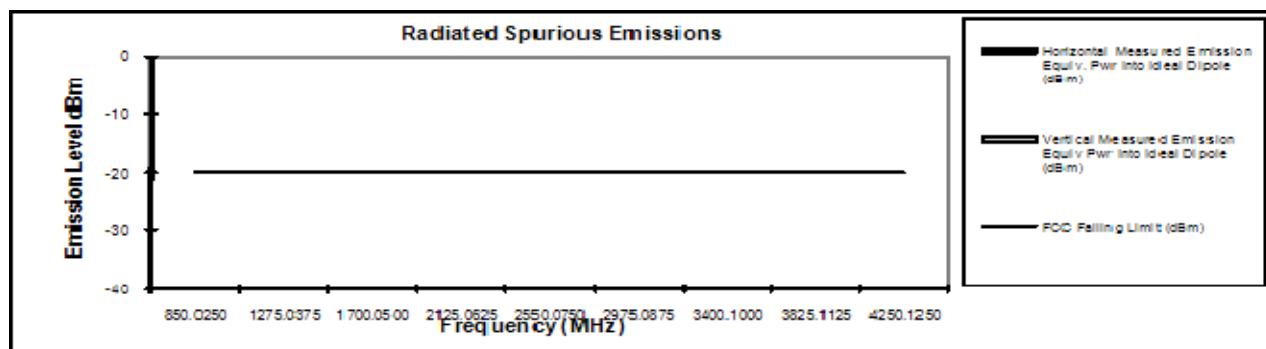


Transmit Radiated Spurious Emissions: APX7000 MHUE1002A DIGITAL

Tx Power: 4 Watts

469.9875 MHz

Channel Spacing 12.5kHz | SWR CAM100L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	-	-
1409.9625	-20	-	-
1879.9500	-20	-	-
2349.9375	-20	-	-
2819.9250	-20	-	-
3289.9125	-20	-	-
3759.9000	-20	-	-
4229.8875	-20	-	-
4699.8750	-20	-	-

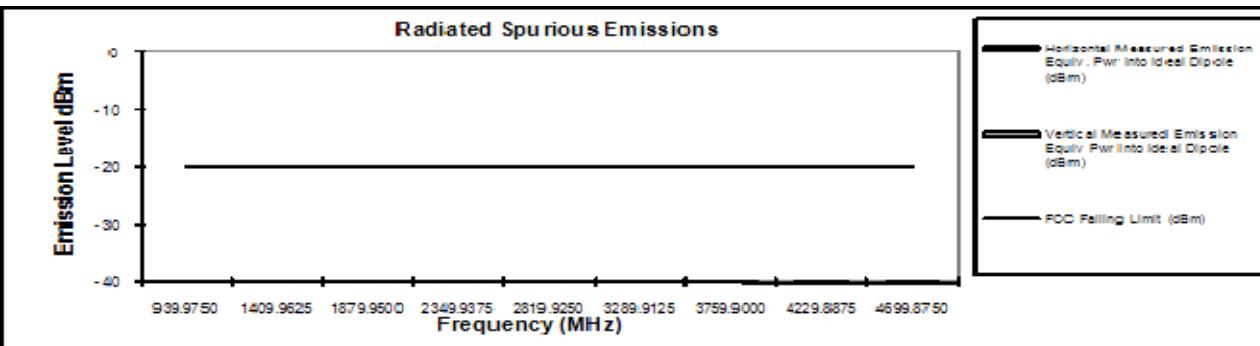

* Indicates the spurious emission could not be detected due to noise limitations or artifacts.

Permit to CPT 47 Part 2.1057(a), emissions estimated more than 20 dB below the permissible limit are not reported.


The data presented here was taken using the calibration method as found in the TIA/EIA-603 document.
 Motorola Production EMC Lab - Test. Performed by: Andy Giesler
 FCC Registration: 91932 / Industry Canada: IC1000-1

September 18, 2011


Figure 6G-16: 4W, 425.0125 MHz & 469.9875, 12.5 kHz Channel Spacing

TDMA Mode**Motorola Solutions****FCC ID:AZ492FT4904****Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA****Tx Power: 49.5 Watts****450.0125 MHz****Channel Spacing 12.5kHz | S/N CAH10L34J**

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
900.0250	-20	±	±
1350.0375	-20	±	±
1800.0500	-20	±	±
2250.0625	-20	±	±
2700.0750	-20	±	±
3150.0875	-20	±	±
3600.1000	-20	±	±
4050.1125	-20	±	±
4500.1250	-20	±	±

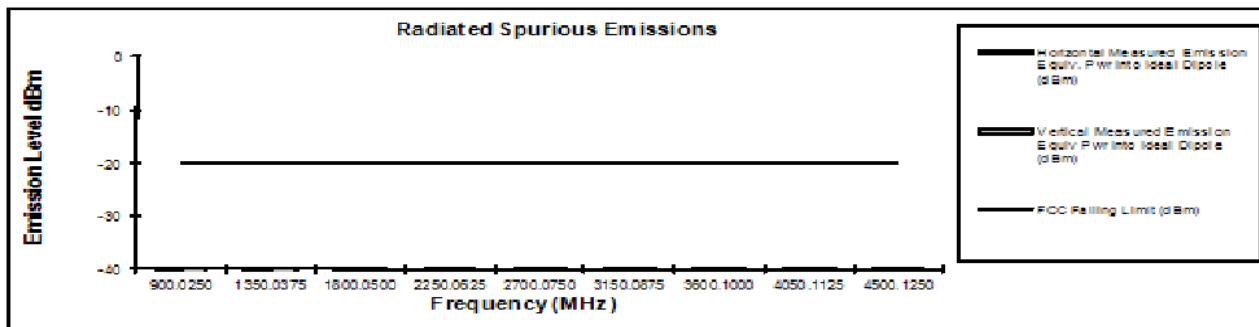**Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA****Tx Power: 44 Watts****484.9875 MHz****Channel Spacing 12.5kHz | S/N CAH10L34J**

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
969.9750	-20	±	±
1454.9625	-20	±	±
1939.9500	-20	±	±
2424.9375	-20	±	±
2909.9250	-20	±	±
3394.9125	-20	±	±
3879.9000	-20	±	±
4364.8875	-20	±	±
4849.8750	-20	±	±

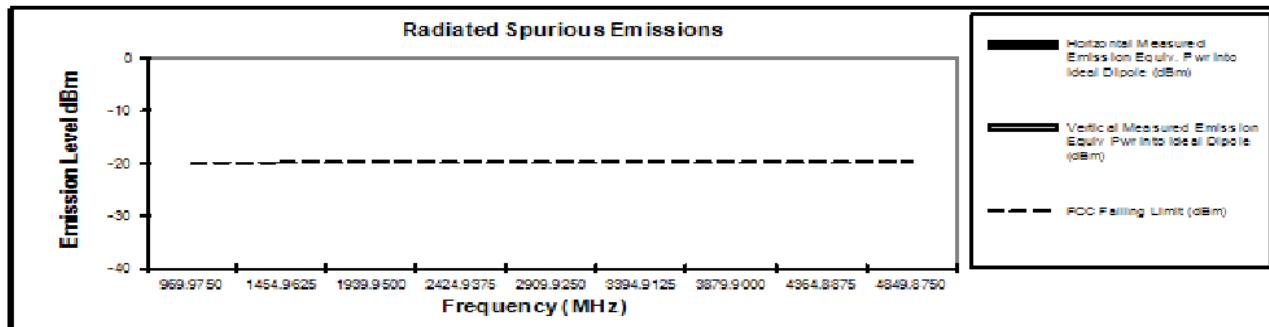

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Permit to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner
FCC Registration: 91932 / Industry Canada: IC109U-1

November 1, 2011

Figure 6G-17: 49.5W & 44W, 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA

Tx Power: 27.5 Watts


511.9875 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1023.9750	-20	±	±
1535.9625	-20	±	±
2047.9500	-20	±	±
2559.9375	-20	±	±
3071.9250	-20	±	±
3583.9125	-20	±	±
4095.9000	-20	±	±
4607.8875	-20	±	±
5119.8750	-20	±	±

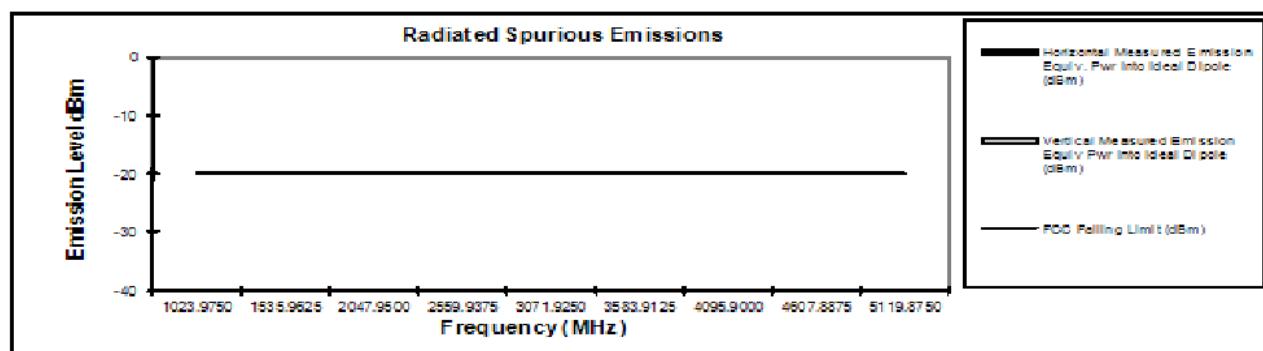

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA

Tx Power: 27.5 Watts

519.9875 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1839.9750	-20	±	±
1559.9625	-20	±	±
2079.9500	-20	±	±
2599.9375	-20	±	±
3119.9250	-20	±	±
3639.9125	-20	±	±
4159.9000	-20	±	±
4679.8875	-20	±	±
5199.8750	-20	±	±

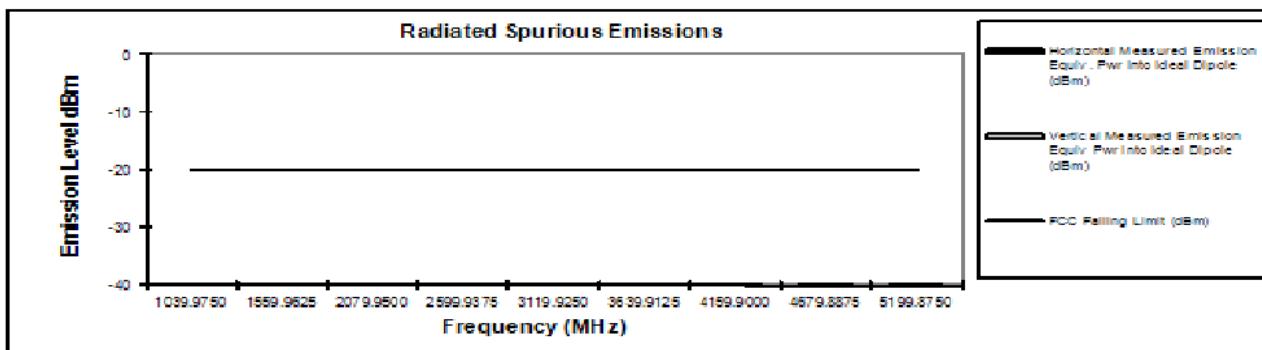

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Plantation EMC Lab – Test Performed by: Andy Gessner
 FCC Registration: 91932 / Industry Canada: IC109U-1

November 1, 2011

Figure 6G-18: 27.5W, 511.9875 & 519.9875 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA

Tx Power: 4 Watts

450.0125 MHz

Channel Spacing 12.5kHz | S/N CAH10L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
900.0250	-20	±	±
1350.0375	-20	±	±
1800.0500	-20	±	±
2250.0625	-20	±	±
2700.0750	-20	±	±
3150.0875	-20	±	±
3600.1000	-20	±	±
4050.1125	-20	±	±
4500.1250	-20	±	±

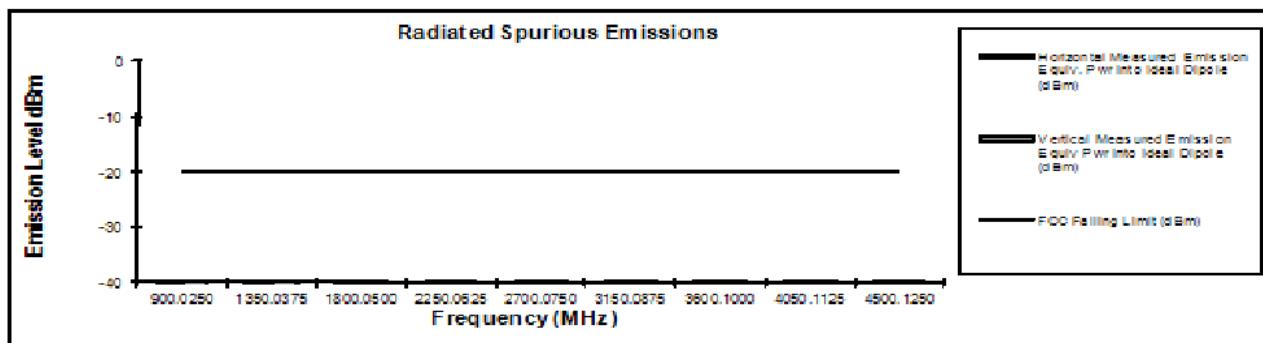


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA

Tx Power: 4 Watts

484.9875 MHz

Channel Spacing 12.5kHz | S/N CAH10L34J

Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
969.9750	-20	±	±
1454.9625	-20	±	±
1939.9500	-20	±	±
2424.9375	-20	±	±
2909.9250	-20	±	±
3394.9125	-20	±	±
3879.9000	-20	±	±
4364.8875	-20	±	±
4849.8750	-20	±	±

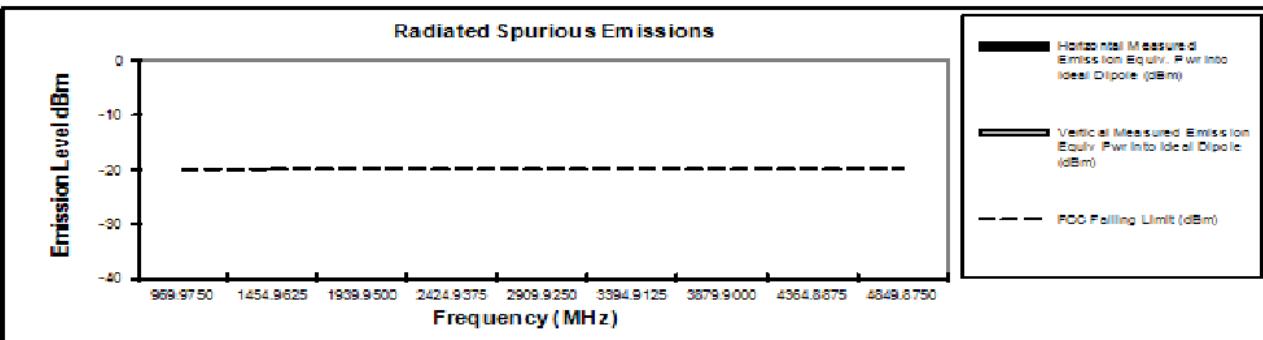

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Permit to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.

Motorola Plantation EMC Lab – Test Performed by: Andy Gessner
FCC Registration: 91932 / Industry Canada: IC109U-1

November 1, 2011

Figure 6G-19: 4W, 450.0125 & 484.9875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA

Tx Power: 4 Watts


511.9875 MHz		Channel Spacing 12.5kHz S/N CAM110L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1023.9750	-20	±	±
1535.9625	-20	±	±
2047.9500	-20	±	±
2559.9375	-20	±	±
3071.9250	-20	±	±
3583.9125	-20	±	±
4095.9000	-20	±	±
4607.8875	-20	±	±
5119.8750	-20	±	±

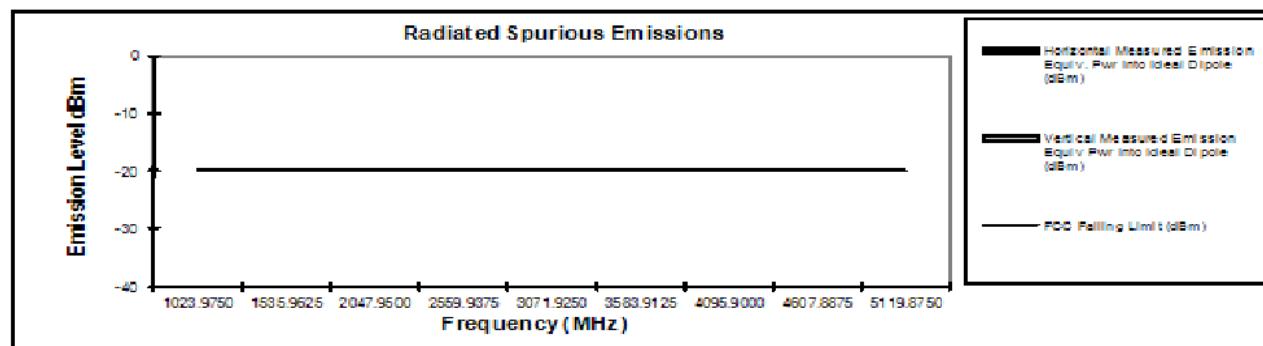

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA

Tx Power: 4 Watts

519.9875 MHz		Channel Spacing 12.5kHz S/N CAM110L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
1039.9750	-20	±	±
1559.9625	-20	±	±
2079.9500	-20	±	±
2599.9375	-20	±	±
3119.9250	-20	±	±
3639.9125	-20	±	±
4159.9000	-20	±	±
4679.8875	-20	±	±
5199.8750	-20	±	±

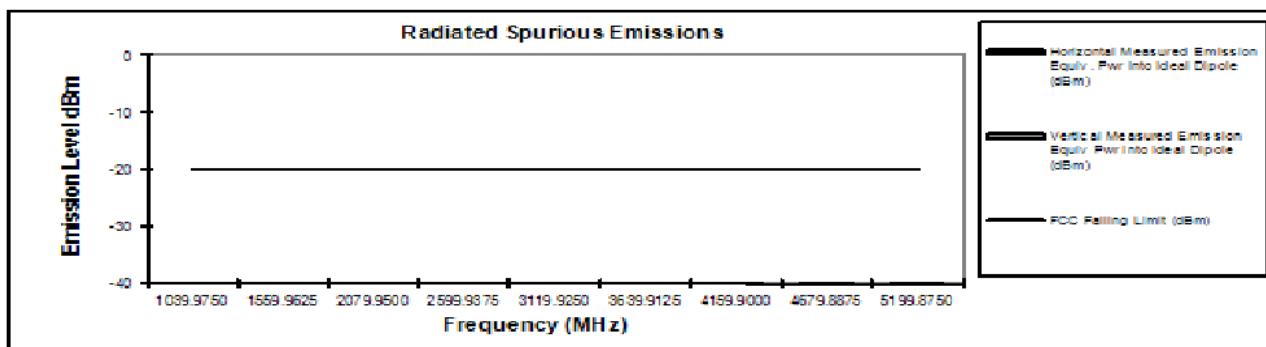

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.
 Motorola Plantation EMC Lab – Test Performed by: Andy Geissner
 FCC Registration: 91932 / Industry Canada: IC109U-1

Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode

Tx Power: 48 Watts


380.0125 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
760.0260	-20	*	*
1140.0375	-20	*	*
1520.0500	-20	*	*
1900.0625	-20	*	*
2280.0750	-20	*	*
2660.0875	-20	*	*
3040.1000	-20	*	*
3420.1125	-20	*	*
3800.1250	-20	*	*



Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode

Tx Power: 48 Watts

406.2 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
812.4000	-20	*	*
1218.6000	-20	*	*
1624.8000	-20	*	*
2031.0000	-20	*	*
2437.2000	-20	*	*
2843.4000	-20	*	*
3249.6000	-20	*	*
3655.8000	-20	*	*
4062.0000	-20	*	*

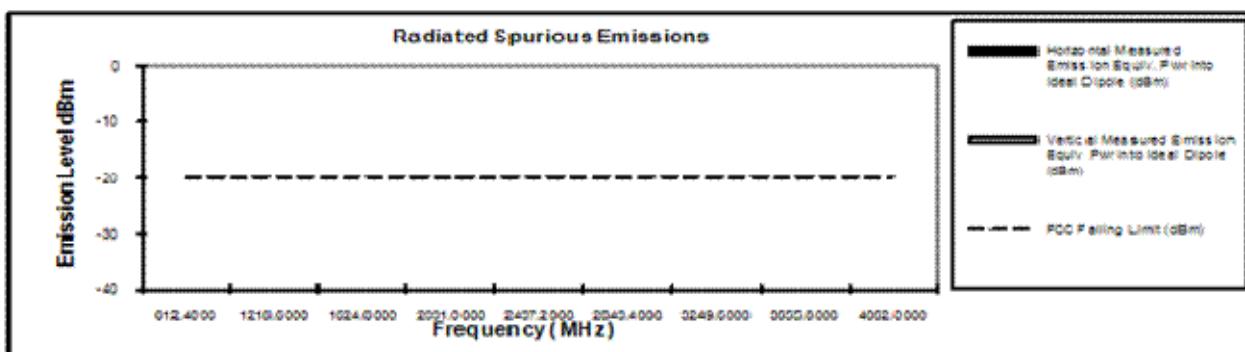

* Indicates the spurious emission could not be detected due to noise, limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


Figure 6G-21: 48W, 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode
Tx Power: 48 Watts

425.0125 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
850.0250	-20	*	*
1275.0375	-20	*	*
1700.0500	-20	*	*
2125.0625	-20	*	*
2550.0750	-20	*	*
2975.0875	-20	*	*
3400.1000	-20	*	*
3825.1125	-20	*	*
4250.1250	-20	*	*

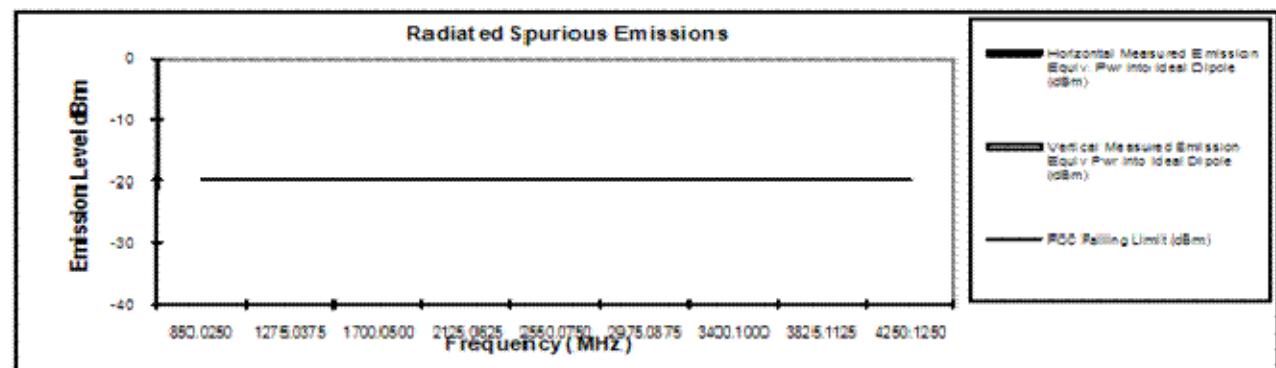

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode
Tx Power: 48 Watts

469.9875 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
939.9750	-20	*	*
1409.9625	-20	*	*
1879.9500	-20	*	*
2349.9375	-20	*	*
2819.9250	-20	*	*
3289.9125	-20	*	*
3759.9000	-20	*	*
4229.8875	-20	*	*
4699.8750	-20	*	*

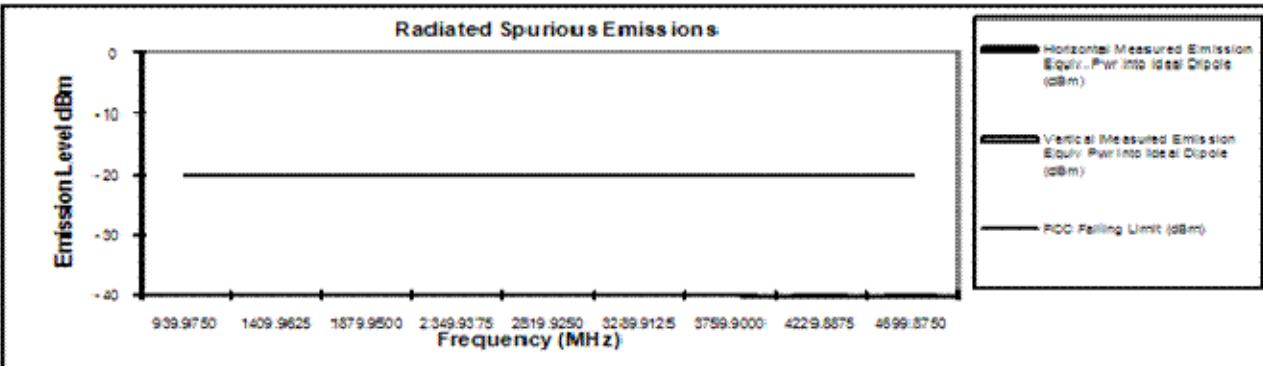

* Indicates the spurious emission could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

Figure 6G-22: 48W, 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing


Motorola Solutions

FCC ID:AZ492FT4904

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode

Tx Power: 4 Watts


380.0125 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
760.0250	-20	*	*
1140.0375	-20	*	*
1520.0500	-20	*	*
1900.0625	-20	*	*
2280.0750	-20	*	*
2660.0875	-20	*	*
3040.1000	-20	*	*
3420.1125	-20	*	*
3800.1250	-20	*	*

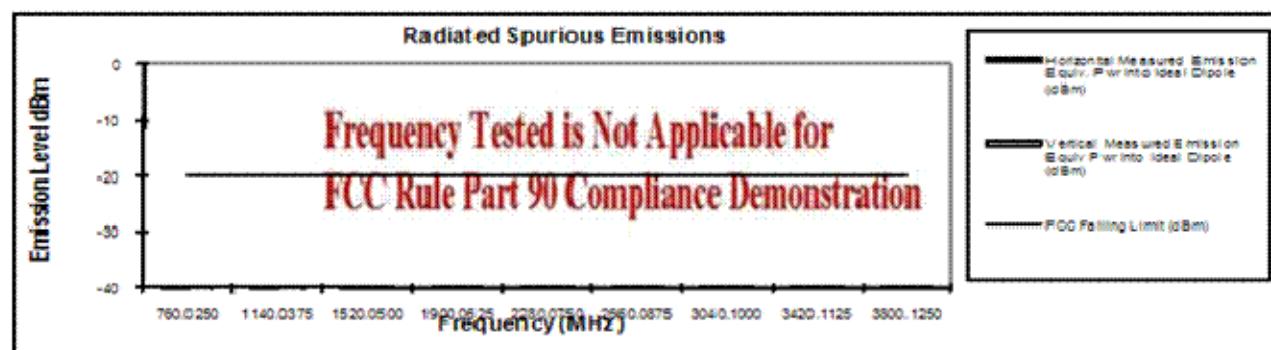

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode

Tx Power: 4 Watts

406.2 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Failing Limit (dBm)	Horizontal Measured Emission Equiv. Pwr into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr into Ideal Dipole (dBm)
812.4000	-20	*	*
1218.6000	-20	*	*
1624.8000	-20	*	*
2031.0000	-20	*	*
2437.2000	-20	*	*
2843.4000	-20	*	*
3249.6000	-20	*	*
3655.8000	-20	*	*
4062.0000	-20	*	*

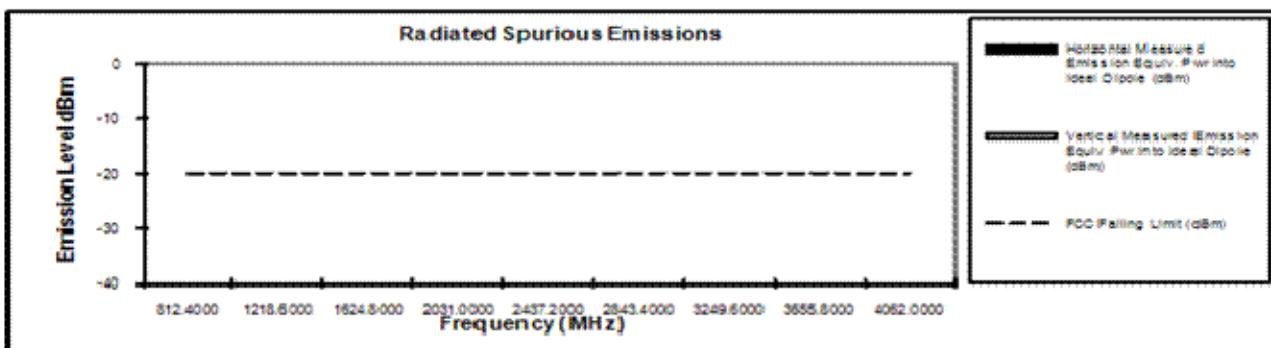

* Indicates the spurious emissions could not be detected due to noise limitations or ambient.

Pursuant to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

The data presented here was taken using the substitution method as found in the TIA/EIA-603 document.


Figure 6G-23: 4W, 380.0125 MHz & 406.2 MHz, 12.5 kHz Channel Spacing

Motorola Solutions

FCC ID:AZ492FT4904


Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode
Tx Power: 4 Watts

425.0125 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
850.0250	-20	*	*
1275.0375	-20	*	*
1700.0500	-20	*	*
2125.0625	-20	*	*
2550.0750	-20	*	*
2975.0875	-20	*	*
3400.1000	-20	*	*
3825.1125	-20	*	*
4250.1250	-20	*	*

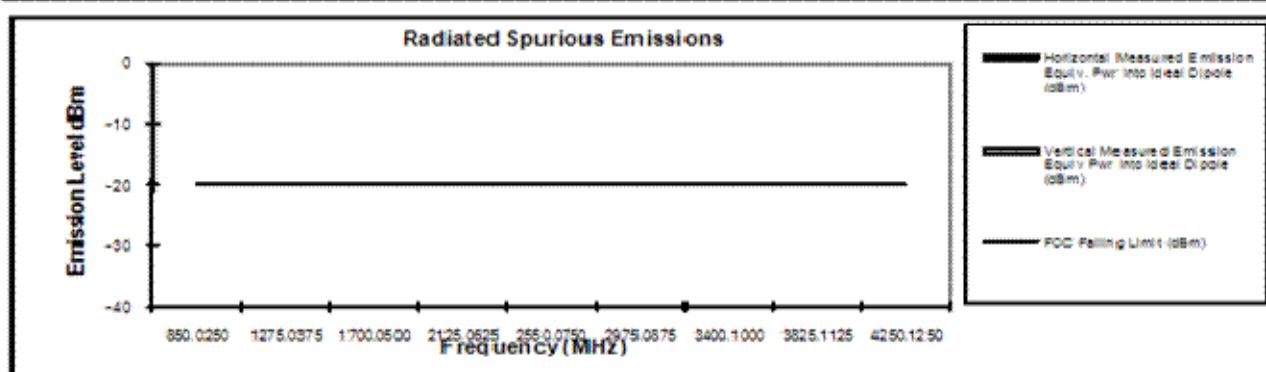

Transmit Radiated Spurious Emissions: APX7500 MHUE1002A TDMA Mode
Tx Power: 4 Watts

469.9875 MHz		Channel Spacing 12.5kHz S/N CAH10L34J	
Frequency (MHz)	FCC Falling Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
939.9750	-20	*	*
1409.9625	-20	*	*
1879.9500	-20	*	*
2349.9375	-20	*	*
2819.9250	-20	*	*
3289.9125	-20	*	*
3759.9000	-20	*	*
4229.8875	-20	*	*
4699.8750	-20	*	*

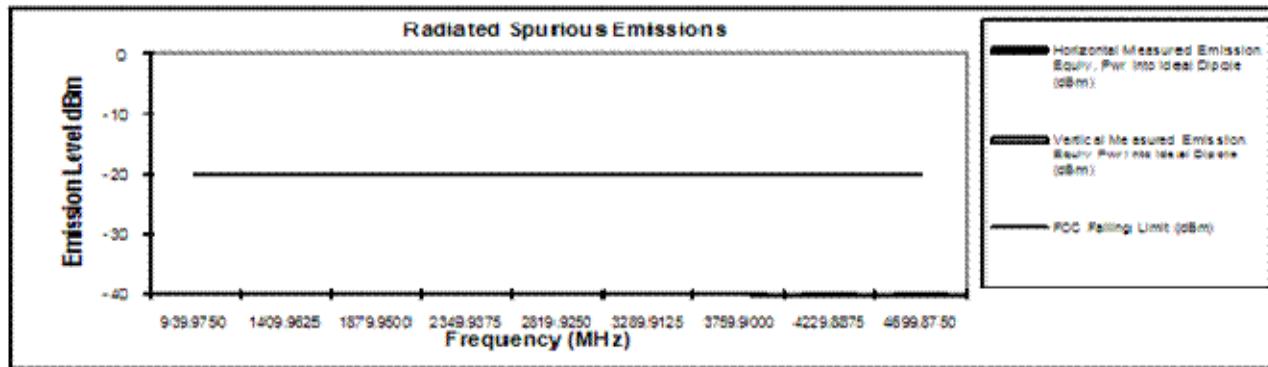

* indicates the spurious emission could not be detected due to noise limitations or ambient.

Permit to CFR 47 Part 2.1057(c), emissions attenuated more than 20 dB below the permissible limit are not reported.

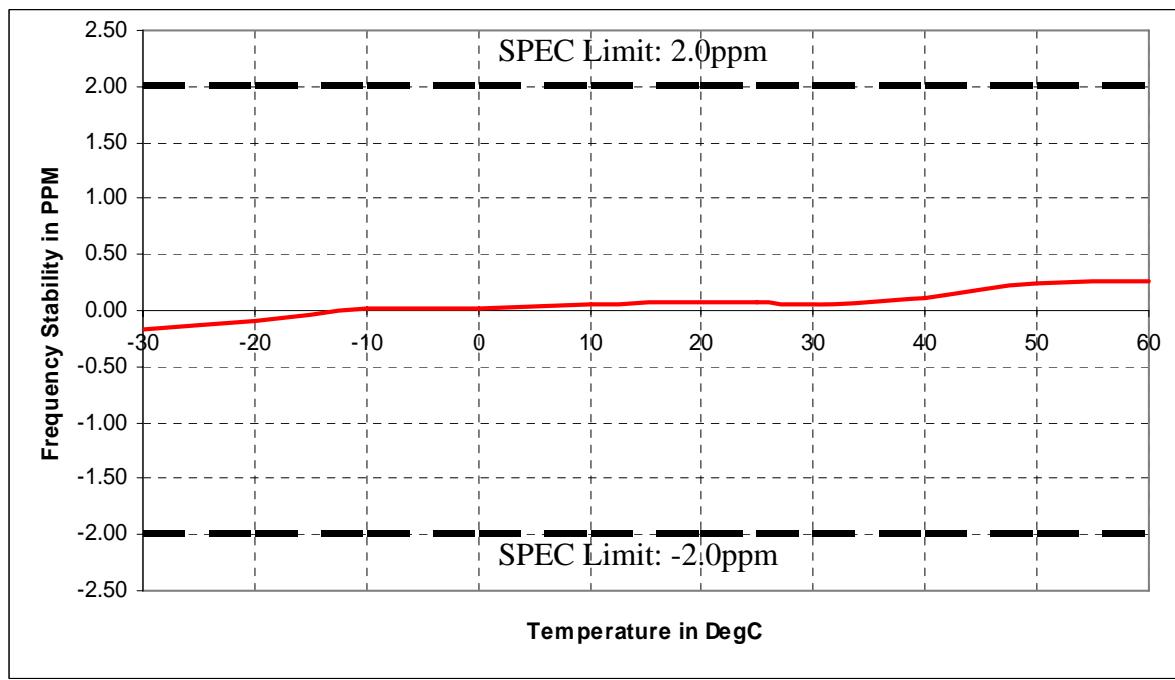
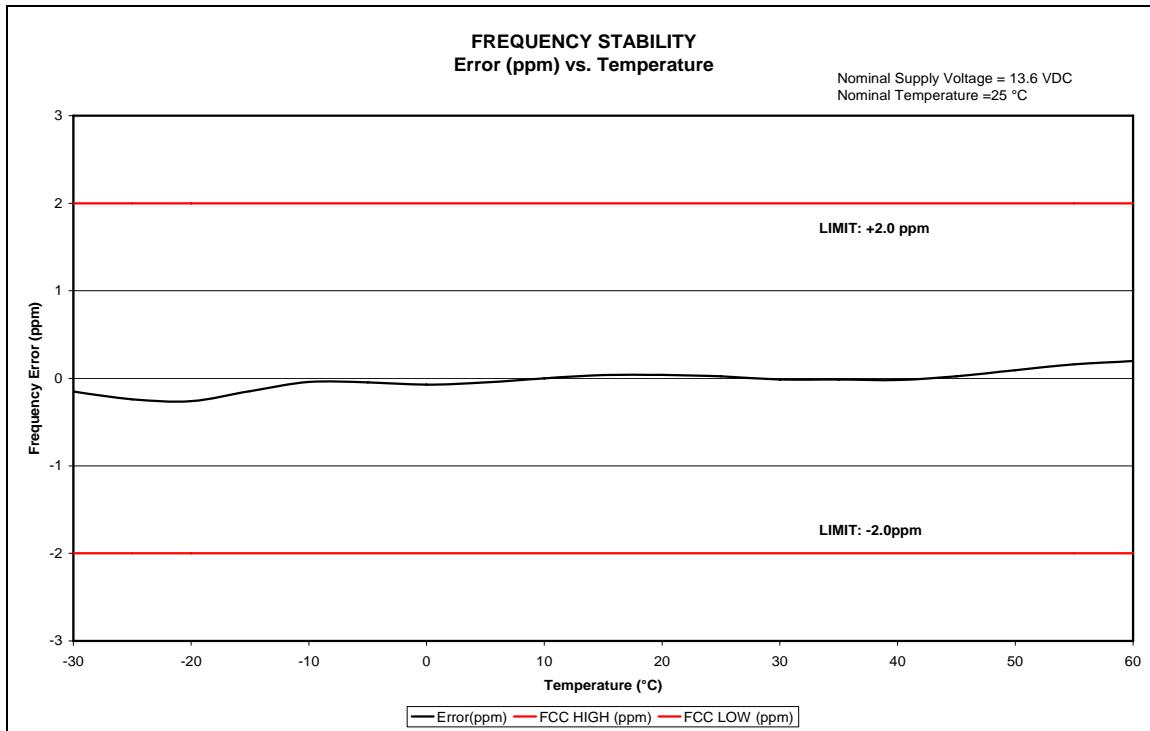
Figure 6G-24: 4W, 425.0125 MHz & 469.9875 MHz, 12.5 kHz Channel Spacing**EXHIBIT 6H****Frequency Stability** - Pursuant 47 CFR 90.213, 90.539, 2.1055 and 2.1033(c)(13)**Figure 6H-1:** Frequency Stability vs. Temperature, 425.0125MHz, -30°C to 60°C

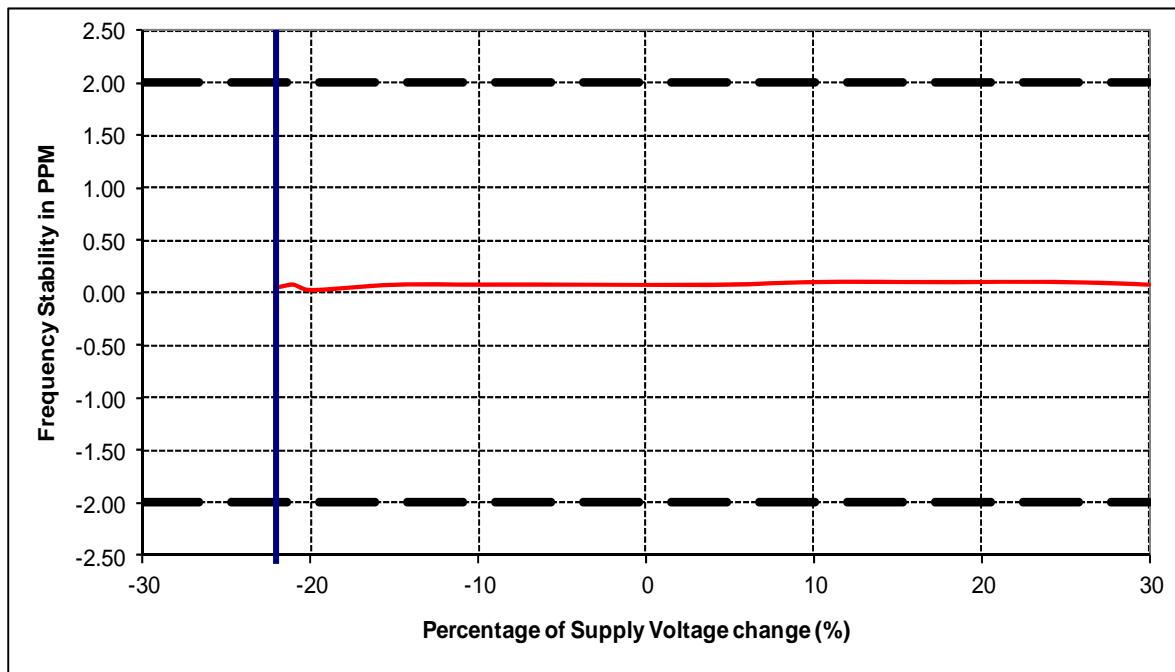
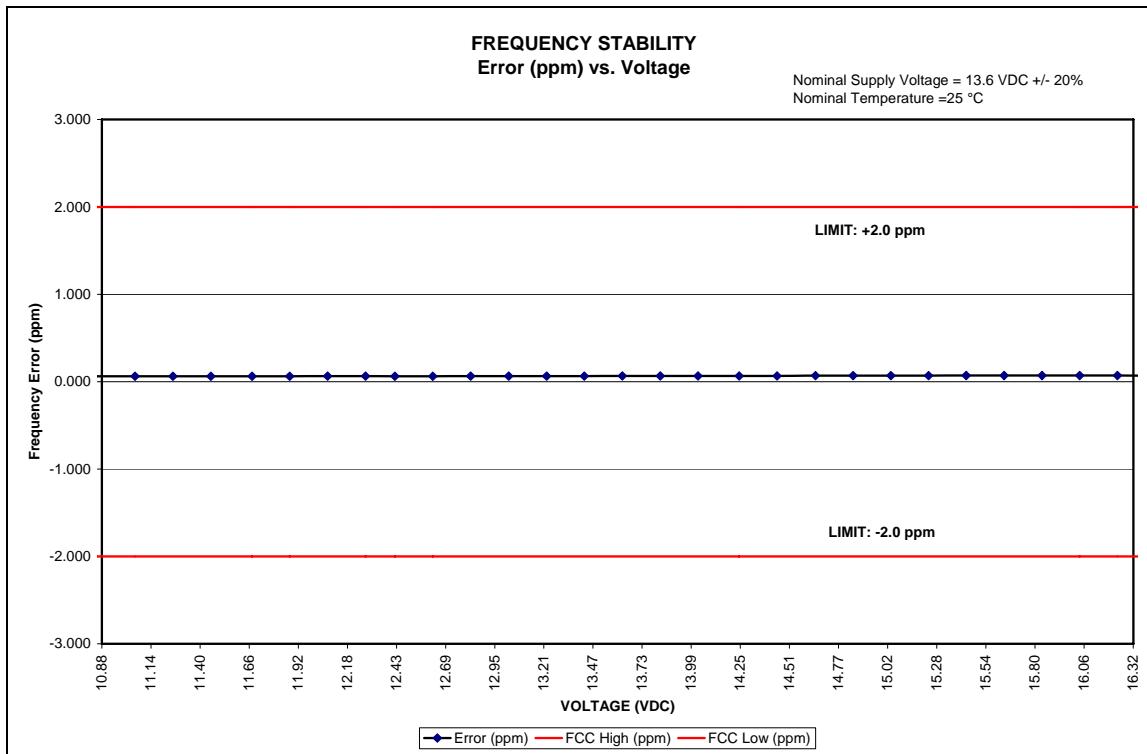
Figure 6H-2: Frequency Stability vs. Temperature, 484.9875 MHz, -30°C to 60°C**Figure 6H-3:** Frequency Stability vs. Supply Voltage Change, 425.0125 MHz**Figure 6H-4:** Frequency Stability vs. Supply Voltage Change, 484.9875 MHz

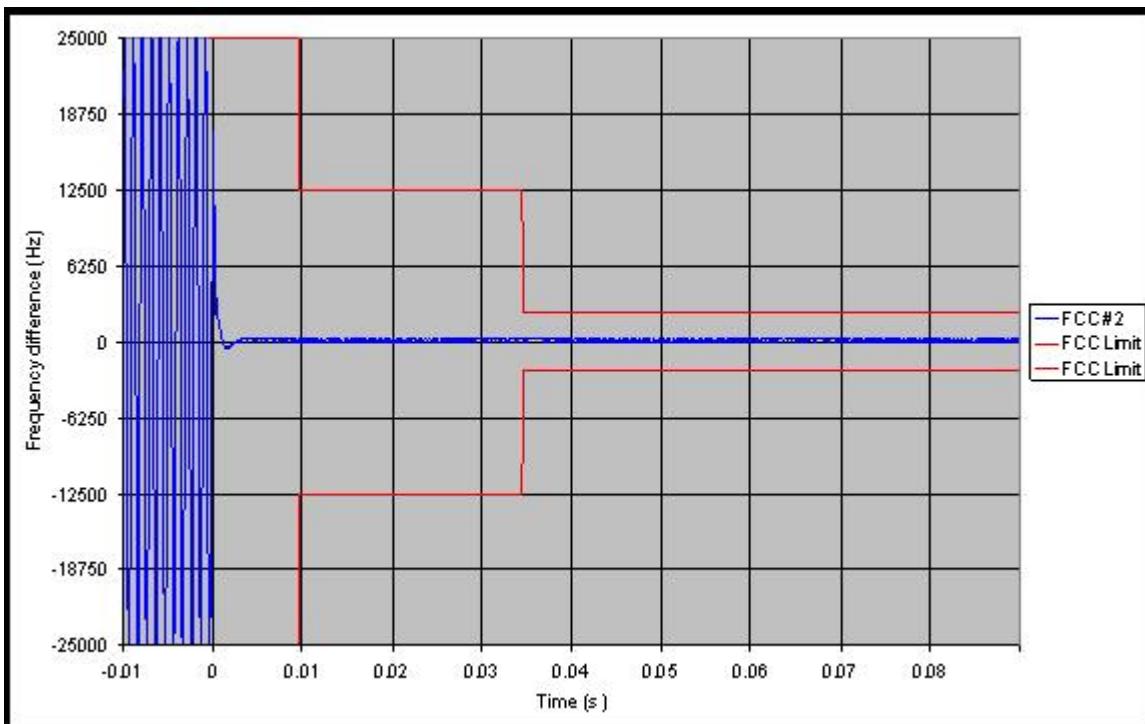
EXHIBIT 6I
Transient Frequency Behavior - Pursuant 47 CFR 90.214UHF Range 2

Figure 6I-1: Transient Frequency Behavior. 484.9875 MHz, 25 kHz Channel Spacing, Key-up Transient (Not for FCC Review)

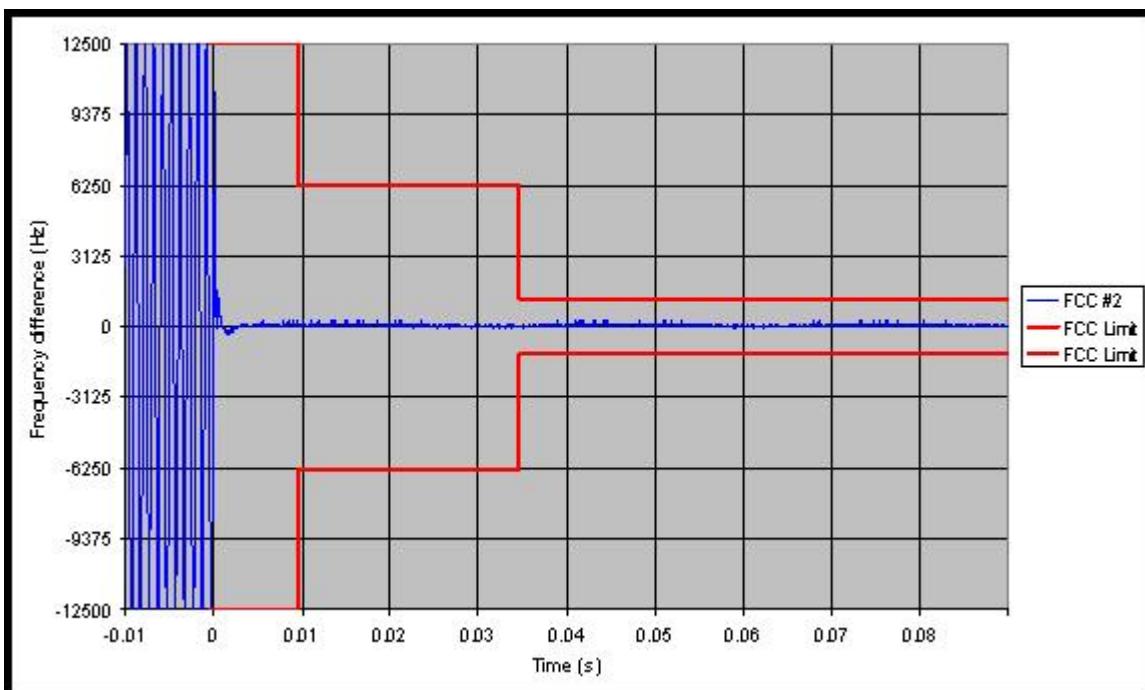
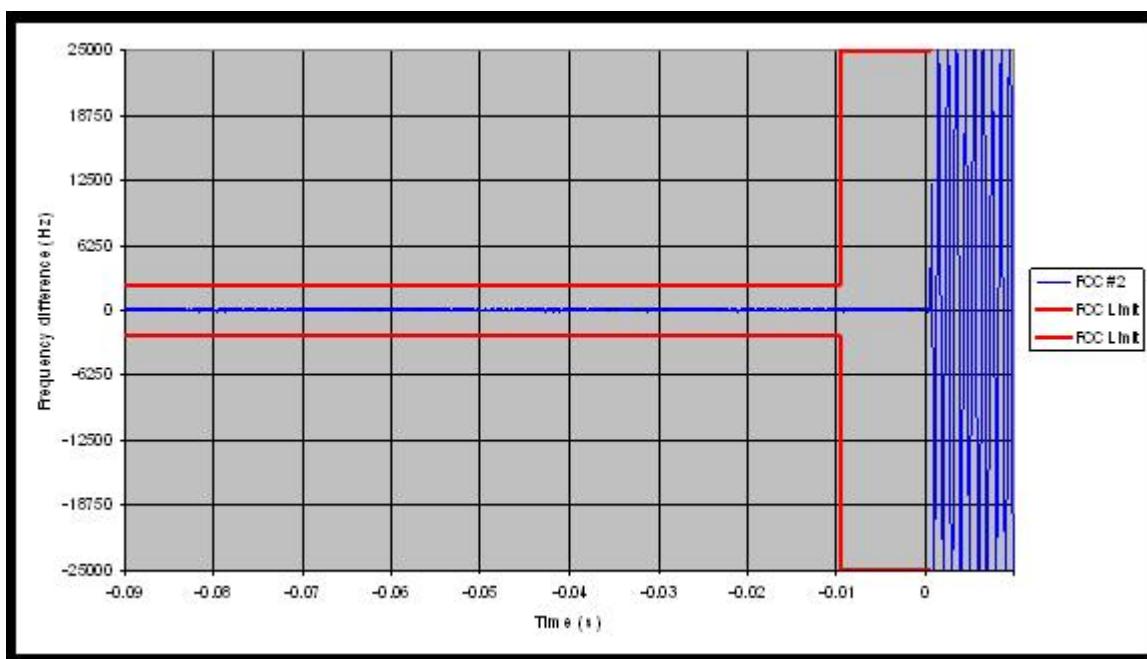
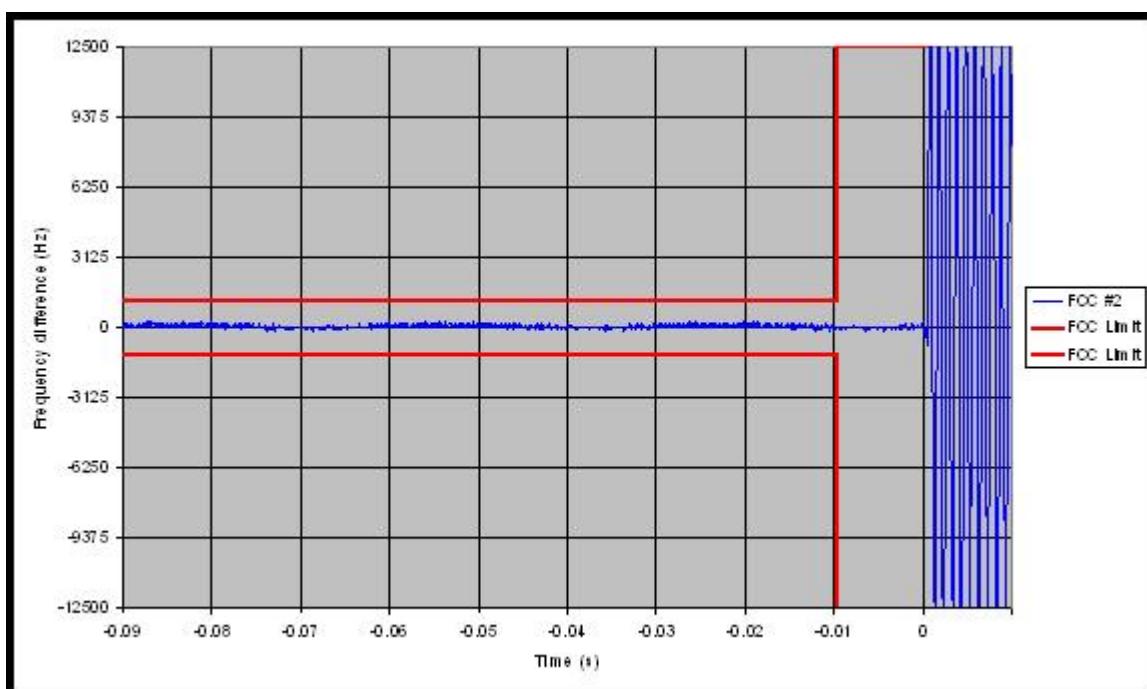


Figure 6I-2: Transient Frequency Behavior. 484.9875 MHz, 12.5 kHz Channel Spacing, Key-up Transient**Figure 6I-3:** Transient Frequency Behavior. 484.9875 MHz, 12.5 kHz Channel Spacing, De-Key Transient**Figure 6I-4:** Transient Frequency Behavior. 484.9875 MHz, 25 kHz Channel Spacing, De-Key Transient
(Not for FCC Review)

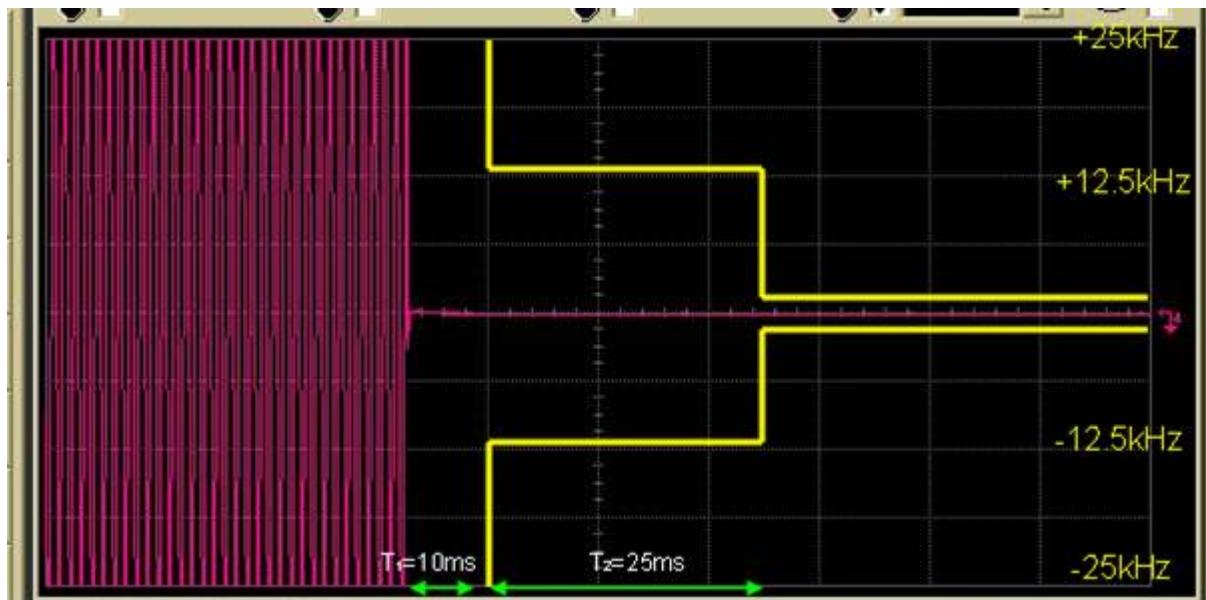
UHF Range 1

Figure 6I-5: Transient Frequency Behavior. 425.0125 MHz, 25 kHz Channel Spacing, Key-up Transient
(Not for FCC Review)

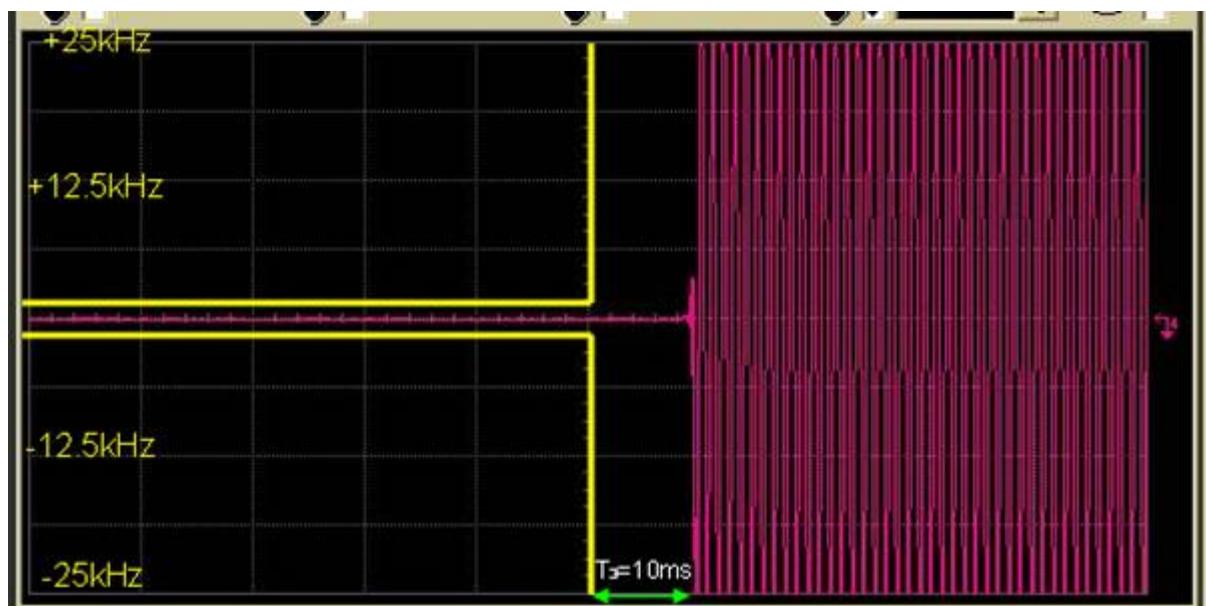


Figure 6I-6: Transient Frequency Behavior. 425.0125 MHz, 25 kHz Channel Spacing, De-Key Transient
(Not for FCC Review)

