

 MOTOROLA SOLUTIONS	 MS ISO/IEC 17025 TESTING SAMM No. 0825
---	--

MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia Sdn Bhd Innoplex Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.	FCC / ISED TEST REPORT Report Revision : Rev.E
--	---

<p>Date/s Tested : 15-APR-2019 - 23-APR-2019</p> <p>Report Issue Date : 19-JUL-2019</p> <p>Manufacturer/Location : Motorola Solutions Malaysia Sdn Bhd</p> <p>Requestor : TANG, GARY</p> <p>Product Type : Mobile</p> <p>Model Number : M25URS9PW1BN</p> <p>Frequency Band : 762-776MHz, 792-806MHz, 806-825MHz, 851-870MHz</p> <p>Low / Max RF Output Power : 3Watts / 36,42 Watts</p> <p>Applicant Name : Motorola Solutions Inc</p> <p>Manufacturer Address : Plot 2, Bayan Lepas Technoplex, 11900 Bayan Lepas, Penang, Malaysia</p> <p>ISED Registrations : 109AK</p> <p>FCC Registrations : 461337</p> <p>Firmware Version : D19.71.01</p>			
<p>The equipment was tested accordance to the requirement listed below:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 60%; padding-left: 20px;"> (LMR) FCC 47 CFR Part 90 ISED RSS119 </td> <td style="width: 40%; text-align: center; vertical-align: middle; padding-left: 20px;"> PASS </td> </tr> </table>		(LMR) FCC 47 CFR Part 90 ISED RSS119	PASS
(LMR) FCC 47 CFR Part 90 ISED RSS119	PASS		

This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.

Prepared By: <hr style="width: 200px; margin-left: 0;"/> Tan Sze Khai Test Personnel	Approved Signatory: <hr style="width: 200px; margin-left: 0;"/> Vincent Foong Chuen Kit Deputy Technical Manager
--	--

Table of Contents

Report Revision History	3
1.0 General Information.....	5
2.0 Summary of Test Results.....	6
3.0 Measurement Uncertainty.....	7
4.0 Equipment List.....	8
5.0 Test Condition.....	11
5.1. Transmitter Test Conditions	11
6.0 Transmitter Test Parameters	12
6.1. RF Output Power	12
6.1.1. Test Setup.....	12
6.1.2. Test Result	12
6.2. Frequency Stability	13
6.2.1. Test Setup.....	13
6.2.2. Test Result	14
6.2.3. Test Limit.....	17
6.3. Audio Frequency Response	18
6.3.1. Test Setup.....	18
6.3.2. Test Result	19
6.3.3. Test Limit.....	20
6.4. Audio Low Pass Filter Response	21
6.4.1. Test Setup.....	21
6.4.2. Test Result	22
6.4.3. Test Limit.....	24
6.5. Modulation Limiting.....	25
6.5.1. Test Setup.....	25
6.5.2. Test Result	26
6.5.3. Test Limit.....	27
6.6. Occupied Bandwidth.....	28
6.6.1. Test Setup (Analog)	28
6.6.2. Test Result (Analog).....	29
6.6.3. Test Setup (Digital).....	45
6.6.4. Test Result (Digital).....	46
6.6.5. Test Limit.....	66
6.7. Band Edge Conducted Spurious Emission (Part 22)	67
6.7.1. Test Setup (Analog)	67
6.7.2. Test Result (Analog).....	67
6.7.3. Test Setup (Digital).....	68
6.7.4. Test Result (Digital).....	68
6.7.5. Test Limit.....	68
6.8. Transient Frequency Behavior.....	69
6.8.1. Test Setup.....	69
6.8.2. Test Result	70
6.8.3. Test Limit.....	70

6.9. Adjacent Channel Power..... 71

6.9.1. Test Setup (Analog)..... 71

6.9.2. Test Result 72

6.9.3. Test Setup (Digital)..... 74

6.9.4. Test result..... 75

6.9.5. Test limit..... 83

6.10. Conducted Spurious Emission 85

6.10.1. Test Setup..... 85

6.10.2. Test Result (Analog)..... 86

6.10.3. Test Result (Digital)..... 115

6.10.4. Test Result (PHASE 2)..... 144

6.10.5. Test Limit..... 173

6.11. Radiated Spurious Emission 174

6.11.1. Test Setup..... 174

6.11.1. Test Result (Analog)..... 175

6.11.2. Test Result (Digital)..... 203

6.11.3. Test Result (Phase 2) 245

6.11.4. Test Limit..... 286

6.12. Effective Radiated Power (ERP) 287

6.12.1. Test Setup..... 287

6.12.2. Test Result 288

6.12.3. Test Limit..... 289

6.13. GNSS (EIRP for 1559 - 1610MHz)..... 290

6.13.1. Test Setup..... 290

6.13.2. Test Result 291

6.13.3. Test Limit..... 292

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	12-MAY-2019	Tan Sze Khai
Rev.B	Add digital information in sections 1 and 5	16-AUG-2019	Vincent Foong
Rev. C	Amended voltage tx power data	19-AUG-2019	Vincent Foong
Rev. D	Amended voltage Frequency Stability data	20-AUG-2019	Tan Sze Khai
Rev. E	Removed “not for fcc review” for 25k points 806 and 851	30-SEP-2019	Vincent Foong

Report Template Document Number: FCD-0084
Report Template Revision Number: Rev. F

Report ID: 14913-RF-00045
FCC ID: AZ492FT7124
IC: 109U-92FT7124

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog C4FM

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4-2014

ANSI C63.26-2015

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remark
2.1046,90.541(700MHz)	RSS-119	RF Power Output	Pass	-
2.1055, 90.213	RSS-119	Frequency Stability	Pass	-
2.1047	RSS-119	Audio Frequency Response	Pass	-
2.1047	RSS-119	Audio Low Pass Filter Response	Pass	-
2.1047	RSS-119	Modulation limiting	Pass	-
2.1049,90.210, 90.691	RSS-119	Occupied Bandwidth	Pass	20K0F1E-10.5935kHz 16K0F3E-15.0100kHz 11K0F3E -9.9613kHz 8K10F1D-8.0054 kHz 8K10F1E-8.0579kHz 8K10F1W-7.9074kHz
-	-	Band Edge Conducted Spurious Emission	NA	-
-	-	Transient Frequency Behavior	NA	-
90.543	RSS-119	Adjacent Channel Power	NA	-
90.543	RSS-119	Conducted Spurious Emissions	Pass	Highest Spur Level -25.97dBm
90.543	RSS-119	Radiated Spurious Emission	Pass	Highest Radiated Emission Level -41.0631dBm
90.543	-	GNSS (EIRP for 1559 – 1610MHz)	Pass	-
90.531	-	Effective Radiated Power (ERP)	Pass	-

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	5.01
	200MHz ~ 1000MHz	5.01
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.01
	18GHz ~ 25GHz	5.01

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.5 & FCC_Frequency Stability 1.0.3 rev.)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
Audio Analyzer	8903B	3011A10475	9-Jul-18	9-Jul-19
SIGNAL GENERATOR	2042	203002/747	22-Jan-19	22-Jan-20
MODULATION ANALYZER	8901B	3216A03889	9-Jul-18	9-Jul-19
DSA	36570A	MY42506781	6-Jul-18	6-Jul-19
POWER SENSOR	E9031A	MY41502652	19-Nov-18	19-Nov-19
POWER METER	E4412A	MY41293855	27-Jul-18	27-Jul-19
POWER SUPPLY	E4416A	GB41293747	11-Apr-19	11-Apr-20
CHAMBER	SH-641	92009188	29-Mar-2019	29-Mar-2020
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.2)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
POWER SUPPLY	6032A	2818A03549	11-Jul-18	11-Jul-19
POWER SENSOR	E4412A	MY41498918	29-Jul-18	29-Jul-19
POWER METER	E4416A	GB41293866	26-Feb-19	26-Feb-21
ATTENUATORS/SWITCH DRIVER	11713A	2508A10141	CNR	CNR
STEP ATTENUATOR/11dB	8494G	MY52300223	26-Jul-18	26-Jul-19
STEP ATTENUATOR/110dB	8496G	MY52300176	26-Jul-18	26-Jul-19
OSCILLOSCOPE	MSO8104A	MY45002372	26-Jun-18	26-Jun-19
AUDIO ANALYZER	8903B	3729A17409	18-Jul-18	18-Jul-19
AUDIO ANALYZER	8903B	3413A14586	7-Jul-18	7-Jul-19
MODULATION ANALYZER	8901B	3616A03889	9-Jul-18	9-Jul-19
SIGNAL GENERATOR	8657A	3039A3205	5-Jul-18	5-Jul-19
SPECTRUM ANALYZER	E4440A	MY46185415	16-Aug-17	16-Aug-19
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA

N to N RF Cable # 2	M17/128- RG400	NA	NA	NA
N to N RF Cable # 3	M17/128- RG400	NA	NA	NA
N to N RF Cable # 4	M17/128- RG400	NA	NA	NA
N to N RF Cable # 5	M17/128- RG400	NA	NA	NA
N to N RF Cable # 6	M17/128- RG400	NA	NA	NA
N to N RF Cable # 7	M17/128- RG400	NA	NA	NA
N to N RF Cable # 8	M17/128- RG400	NA	NA	NA
N to N RF Cable # 9	M17/128- RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR

CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE rev 1.23.02)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
PSA Series Spectrum Analyzer	E4445A	MY46181732	12-Mar-19	12-Mar-21
POWER SUPPLY	6032A	MY41002067	11-Jul-18	11-Jul-19
HIGH PASS FILTER SWITCH BOX	-	CS001	5-Jul-18	5-Jul-19
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA
Vector Signal Generator	SMU200A	103537	22-Jul-17	22-Jul-20

Chamber 2

Description	Model #	Serial Number	Calibration Date	Calibration Due Date
EMI TEST RECEIVER	ESIB40	100264	04-Jul-2018	04-Jul-2019
3m Semi-anechoic Chamber	NA	888032	No Cal. Req'd	No Cal. Req'd
TURNTABLE FLUSH MOUNT 2M	T-200-S	N/A	No Cal. Req'd	No Cal. Req'd
Bore sight Antenna mast	MBS-500	N/A	No Cal. Req'd	No Cal. Req'd
PROGRAMMING CONTROLLER	3000	MF780208272	No Cal. Req'd	No Cal. Req'd
POWER SUPPLY	6674A	3126A-00133	07-Nov-17	07-Nov-19
SIGNAL ANALYZER	FSV40	101103	03-Jul-18	03-Jul-19
DATA LOGGER	SDL500	A.016776	05-Apr-19	05-Apr-20
BILOG ANTENNA	CBL6112D	30991	23-Apr-18	23-Apr-19
DRG HORN FREQ.	SAS-571	566	27-Sep-17	27-Sep-19
PREAMPLIFIER	PAM-0118	427	No Cal. Req'd	No Cal. Req'd
MICROWAVE GENERATOR	SMP04	100146	11-Jul-18	11-Jul-19
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
BILOG ANTENNA	CBL6112B	2964	16-Feb-18	16-Feb-20
Test Software	EMC FCC IC Bluetooth RE Test			
Version	EMC FCC RE v1.5.2			

CNR → Calibration Not Require

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By
RF Output Power	Low & Max	Analog	762.0125,764.0125, 768.0125,769.0125, 769.0875,774.8875, 775.9875,792.0125, 798.0125,799.1875, 799.0875,804.9125, 805.9875,806.0125, 814.9875,823.9875, 851.0125,860.0125, 868.8875	TAN SZE KHAI
Frequency Stability	Max	Analog	769.0875,823.9875	TAN SZE KHAI
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	769.0875,823.9875	TAN SZE KHAI
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	769.0875,823.9875	TAN SZE KHAI
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	769.0875,823.9875	TAN SZE KHAI
Occupied Bandwidth (12.5kHz / 25kHz)	Max	Analog, Digital	806.0125,814.9875, 823.9875,851.0125, 853.9875,860.0125, 868.8875	TAN SZE KHAI
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Max	Analog	NA	NA
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	Analog	NA	NA
Adjacent Channel Power (700MHz Band) (12.5kHz)	Max	Analog, Digital	769.0875, 774.8875, 799.0875, 804.9125	TAN SZE KHAI
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, Digital	762.0125,764.0125, 769.0125,769.0875, 774.8875,792.0125, 794.0125,799.0875, 804.9125,806.0125, 814.9875,823.9875, 851.0125,860.0125, 868.8875	TAN SZE KHAI
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, Digital	762.0125,764.0125, 769.0125,769.0875, 774.8875,792.0125, 794.0125,799.0875, 804.9125,806.0125, 814.9875,823.9875, 851.0125,860.0125, 868.8875	Azil, Faris & Aiman
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	Analog	769.0125,769.0875, 799.0125,804.9125	Azil, Faris & Aiman
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	Analog	799.0875,804.9125	Azil, Faris & Aiman

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

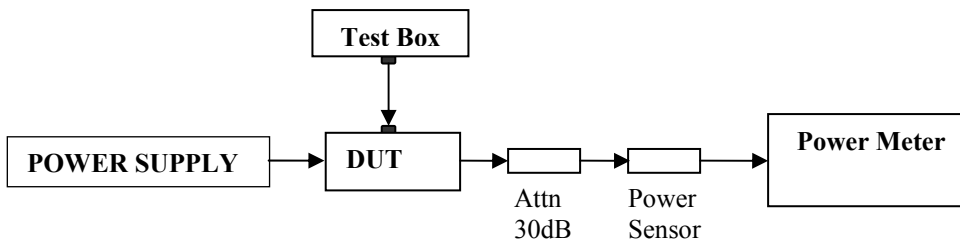


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remarks
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
762.0125	3.02	1.72	35.38	4.58	
764.0125	3.02	1.64	35.11	4.67	
768.0125	3.01	1.67	35.01	5.09	
769.0125	3.01	1.69	35.45	5.13	
769.0875	3.01	1.75	34.9	5.24	
774.8875	3.03	2.04	35.5	5.93	
775.9875	3.03	2.15	35.19	6.18	
792.0125	3.01	3.19	34.85	8.61	
794.0125	3.05	3.32	35.08	8.96	
798.0125	3.01	3.44	34.21	9.41	
799.0875	3.02	3.51	34.25	9.65	
804.9125	3.01	3.65	34.25	9.64	
805.9875	3.03	3.68	34.64	10.07	
806.0125	3.03	3.71	40.21	10.01	
814.9875	3.08	4.02	41.91	10.01	
823.9875	3.01	4.22	41.04	10.01	
851.0125	3.02	3.93	41.18	10.03	
853.9875	3.03	3.78	41.44	9.71	
860.0125	3.02	3.38	40.91	6.75	
868.8875	3.03	2.71	41.64	4.83	

6.2. Frequency Stability

6.2.1. Test Setup

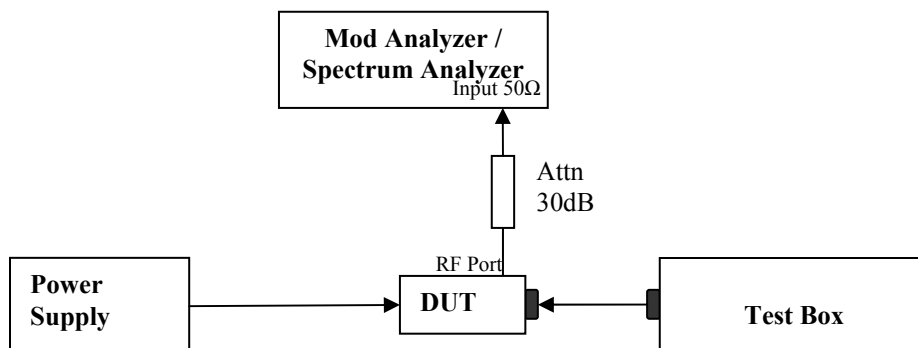


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from -30°C to 50°C.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x$ % as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz


6.2.2. Test Result

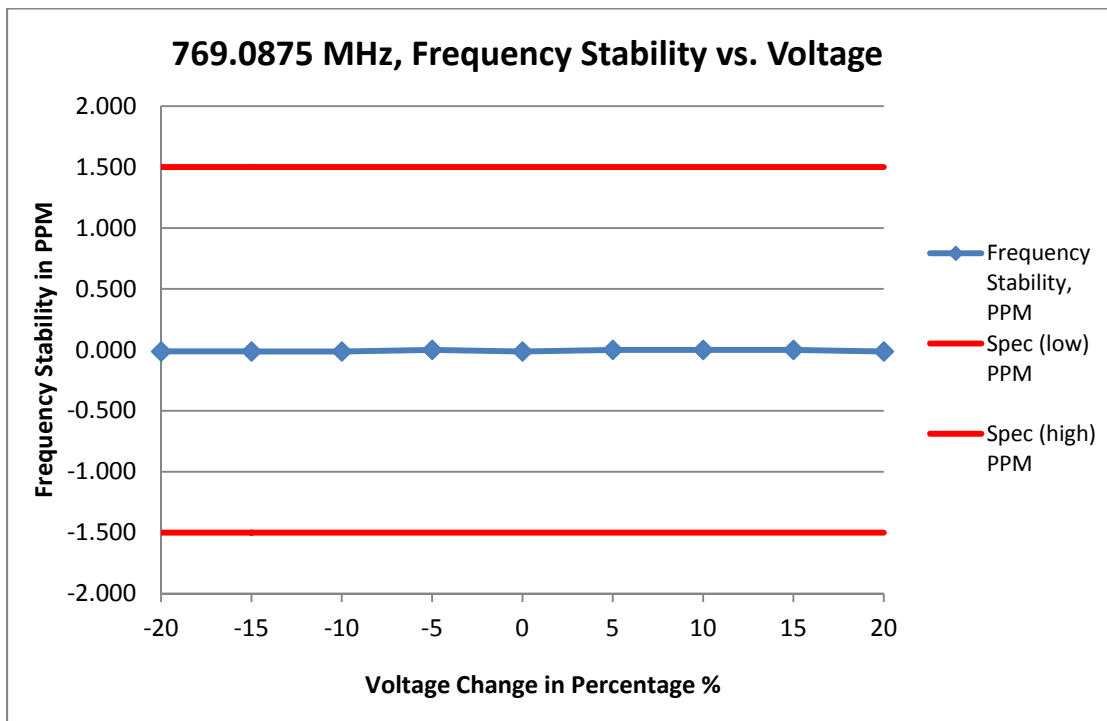


Frequency / Channel Spacing	769.0875 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.880	769.087490	-0.013	-1.500	1.500
-15	11.560	769.087490	-0.013	-1.500	1.500
-10	12.240	769.087490	-0.013	-1.500	1.500
-5	12.920	769.087500	0.000	-1.500	1.500
0	13.600	769.087490	-0.013	-1.500	1.500
5	14.280	769.087500	0.000	-1.500	1.500
10	14.960	769.087500	0.000	-1.500	1.500
15	15.640	769.087500	0.000	-1.500	1.500
20	16.320	769.087490	-0.013	-1.500	1.500

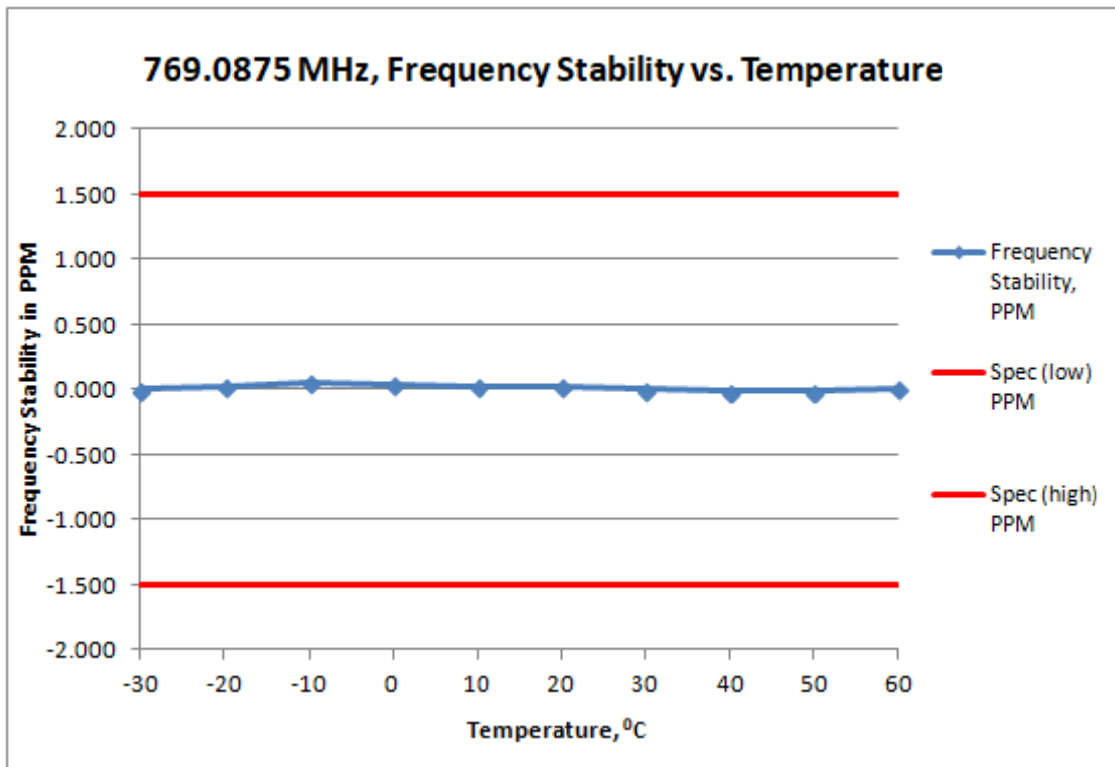

Frequency / Channel Spacing	769.0875 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	769.087500	0.000	-1.500	1.500
-20	769.087520	0.026	-1.500	1.500
-10	769.087540	0.052	-1.500	1.500
0	769.087530	0.039	-1.500	1.500
10	769.087520	0.026	-1.500	1.500
20	769.087520	0.026	-1.500	1.500
30	769.087500	0.000	-1.500	1.500
40	769.087490	-0.013	-1.500	1.500
50	769.087490	-0.013	-1.500	1.500
60	769.087510	0.013	-1.500	1.500

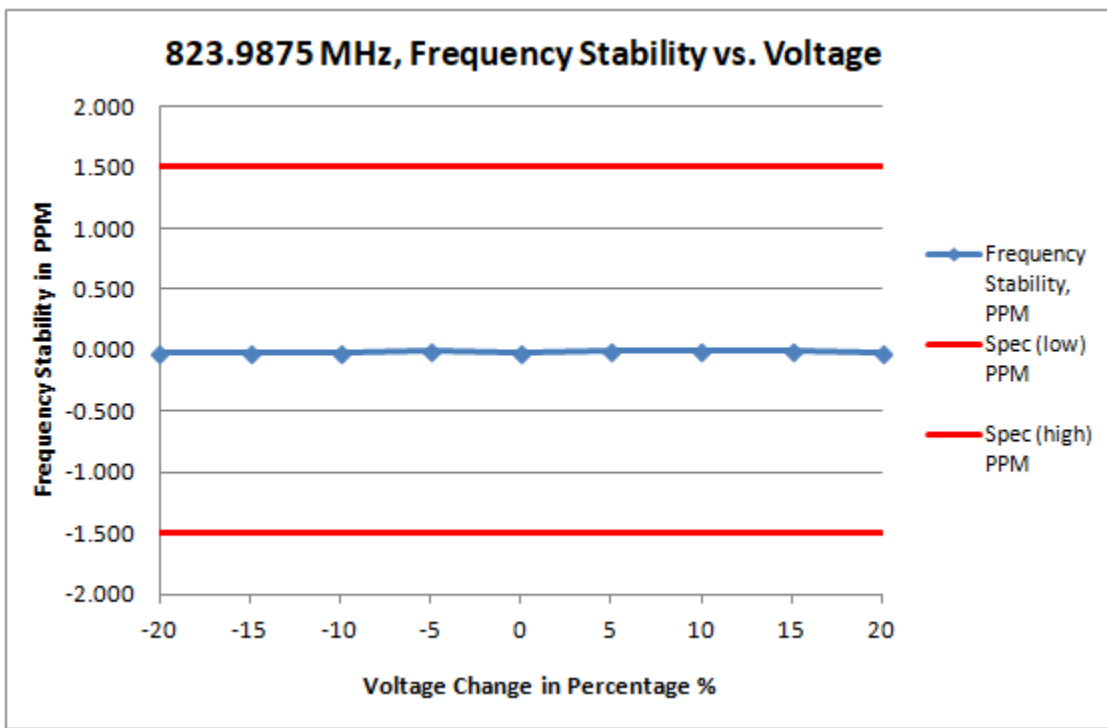

Frequency / Channel Spacing	823.9875 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.880	823.987490	-0.012	-1.500	1.500
-15	11.560	823.987490	-0.012	-1.500	1.500
-10	12.240	823.987490	-0.012	-1.500	1.500
-5	12.920	823.987500	0.000	-1.500	1.500
0	13.600	823.987490	-0.012	-1.500	1.500
5	14.280	823.987500	0.000	-1.500	1.500
10	14.960	823.987500	0.000	-1.500	1.500
15	15.640	823.987500	0.000	-1.500	1.500
20	16.320	823.987490	-0.012	-1.500	1.500

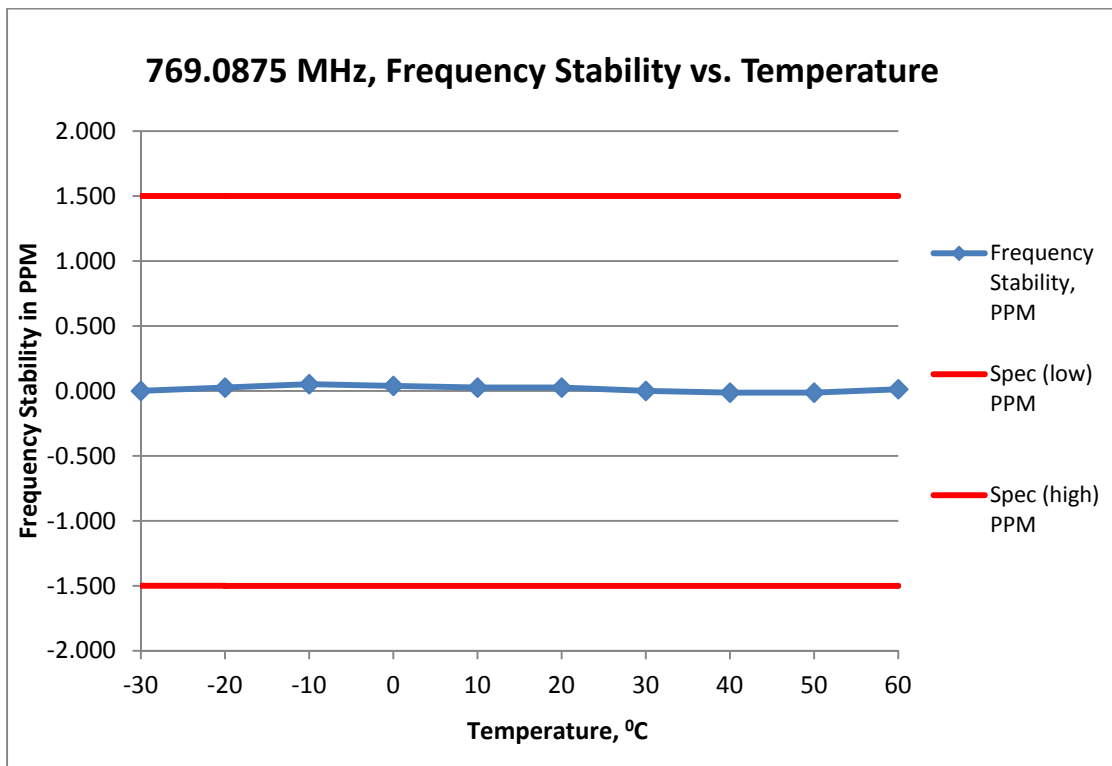


Frequency / Channel Spacing	823.9875 MHz / 12.5 kHz			
Voltage, V	13.6			
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	823.987500	0.000	-1.500	1.500
-20	823.987520	0.024	-1.500	1.500
-10	823.987540	0.049	-1.500	1.500
0	823.987530	0.036	-1.500	1.500
10	823.987520	0.024	-1.500	1.500
20	823.987520	0.024	-1.500	1.500
30	823.987500	0.000	-1.500	1.500
40	823.987490	-0.012	-1.500	1.500
50	823.987490	-0.012	-1.500	1.500
60	823.987510	0.012	-1.500	1.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 1.5ppm



6.3. Audio Frequency Response


6.3.1. Test Setup

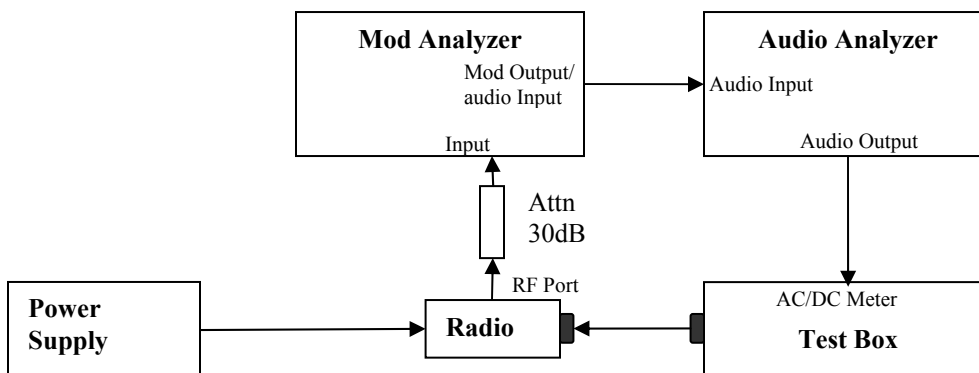


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

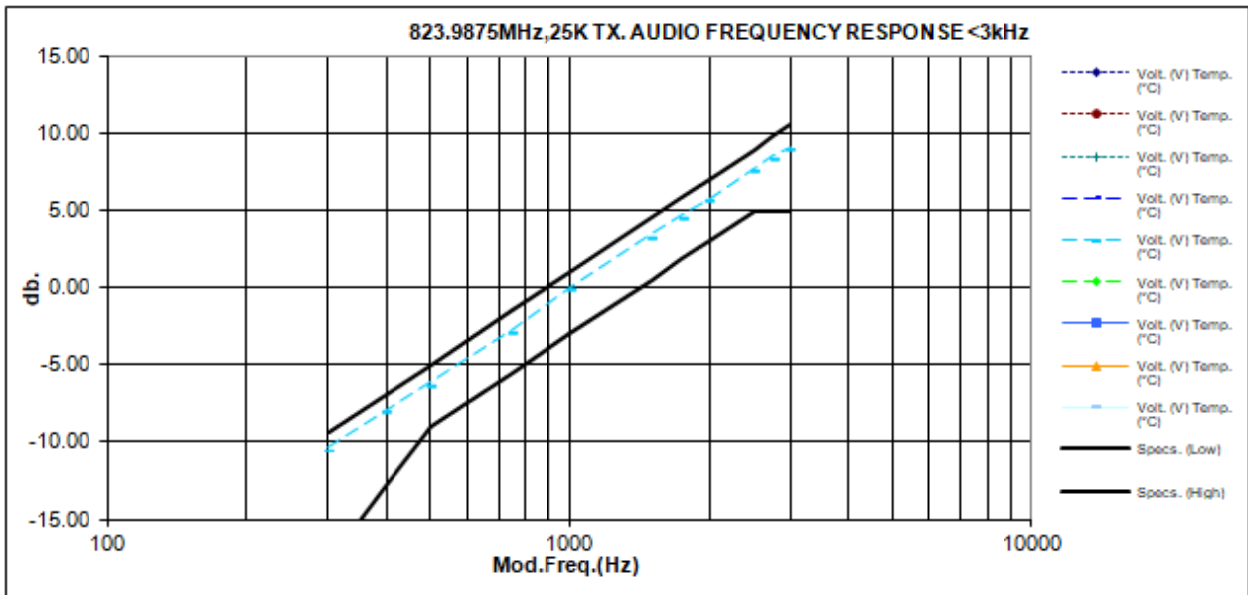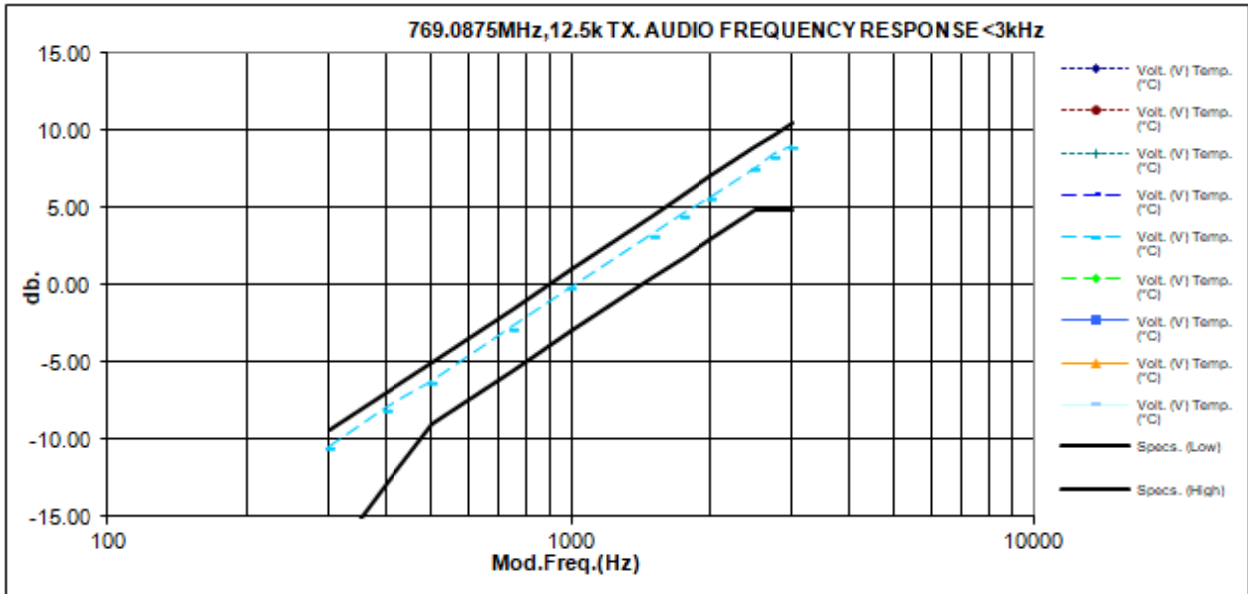

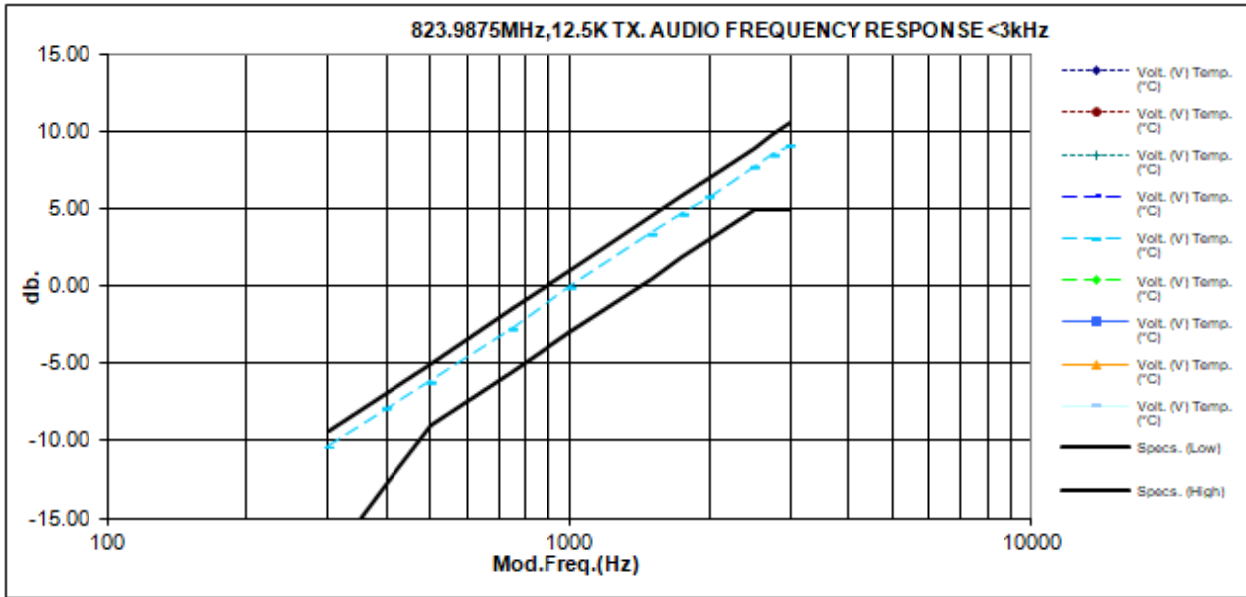

6.3.3. Test Limit

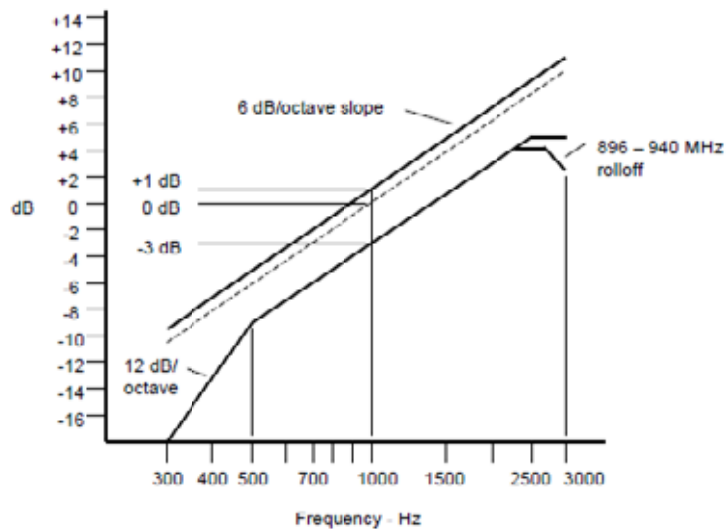


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.



6.4. Audio Low Pass Filter Response


6.4.1. Test Setup

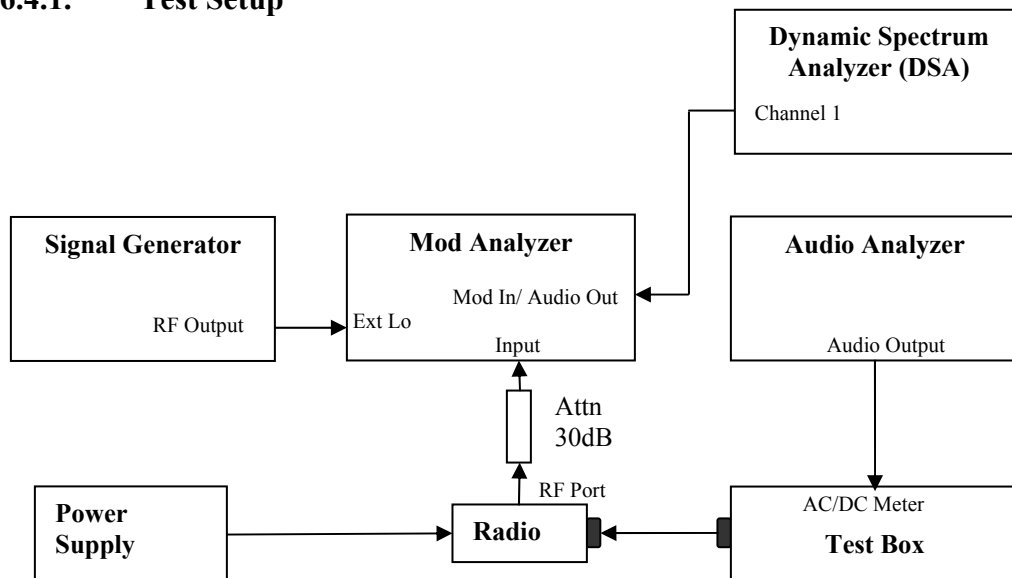


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

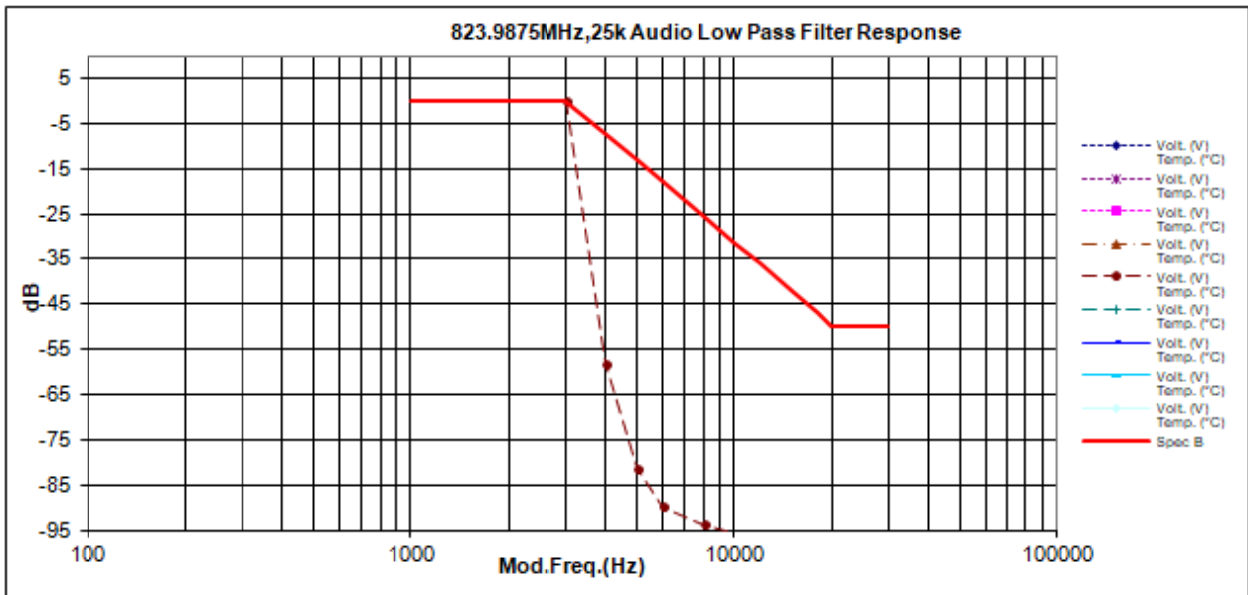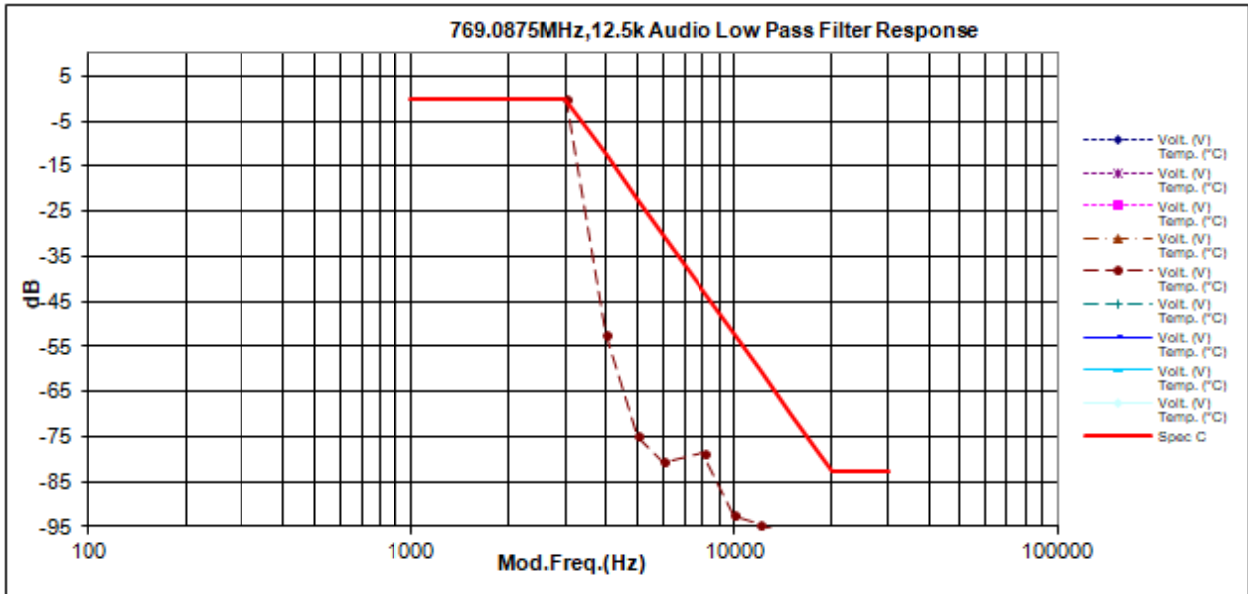

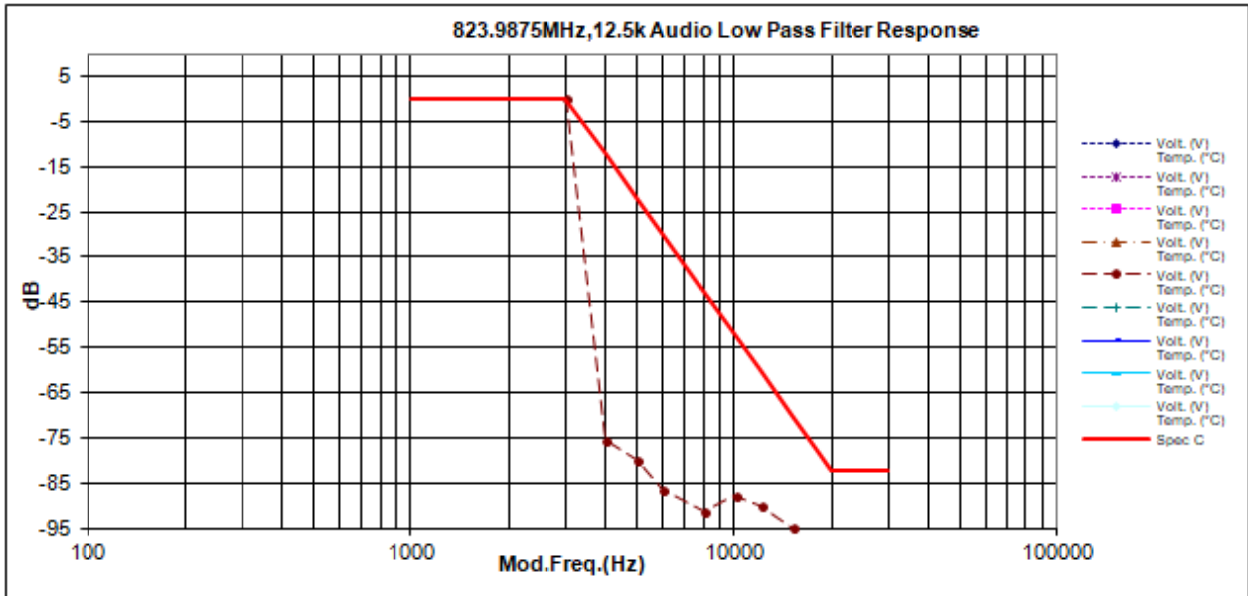

6.4.3. Test Limit

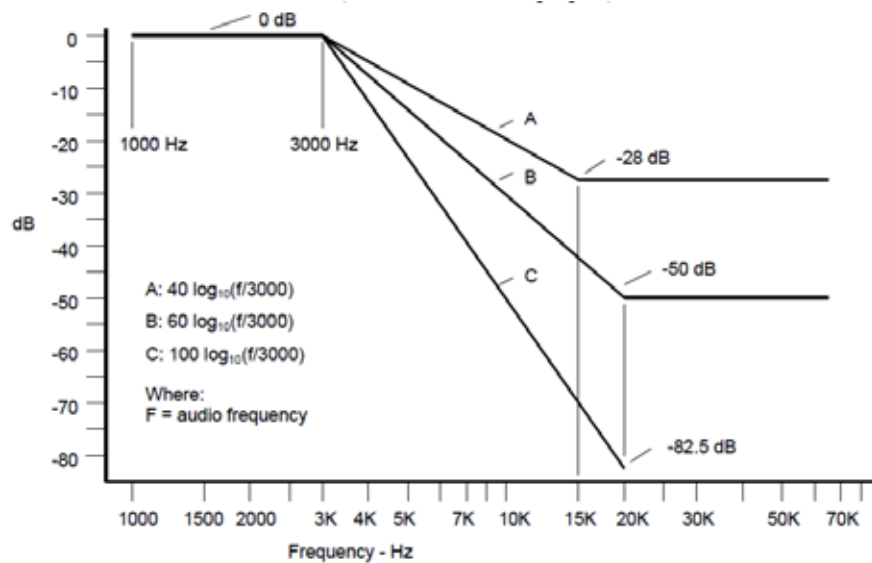

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.



6.5. Modulation Limiting


6.5.1. Test Setup

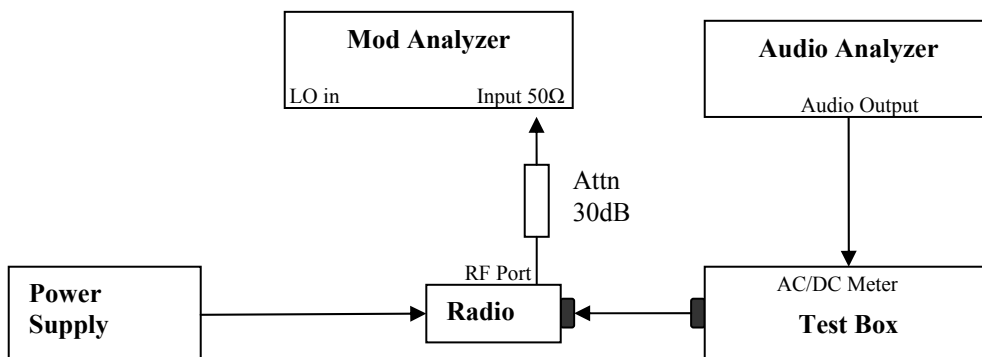

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result

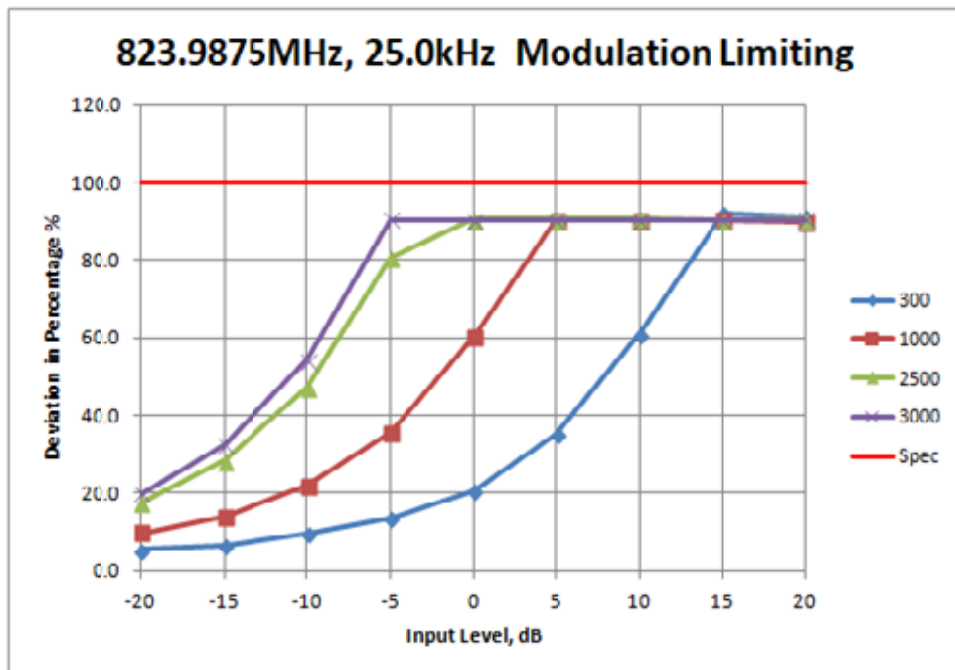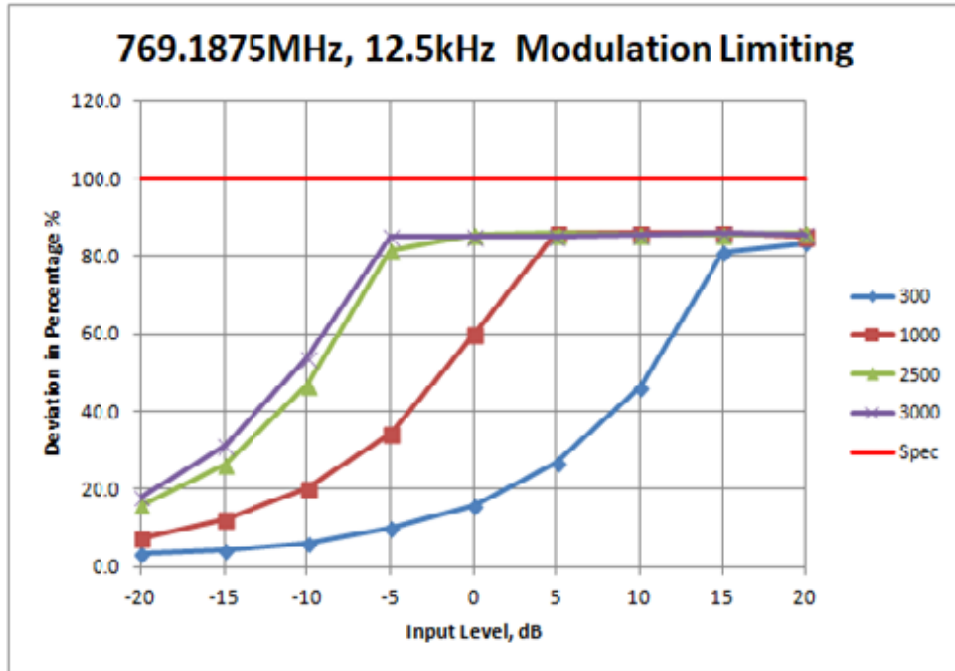


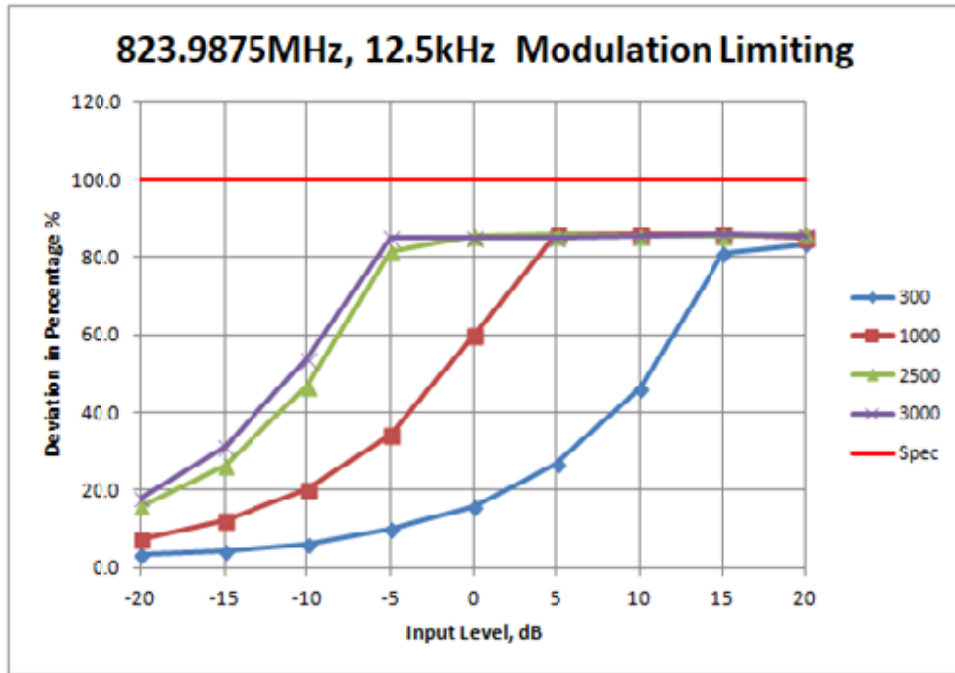

6.5.3. Test Limit
Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth



6.6.1. Test Setup (Analog)


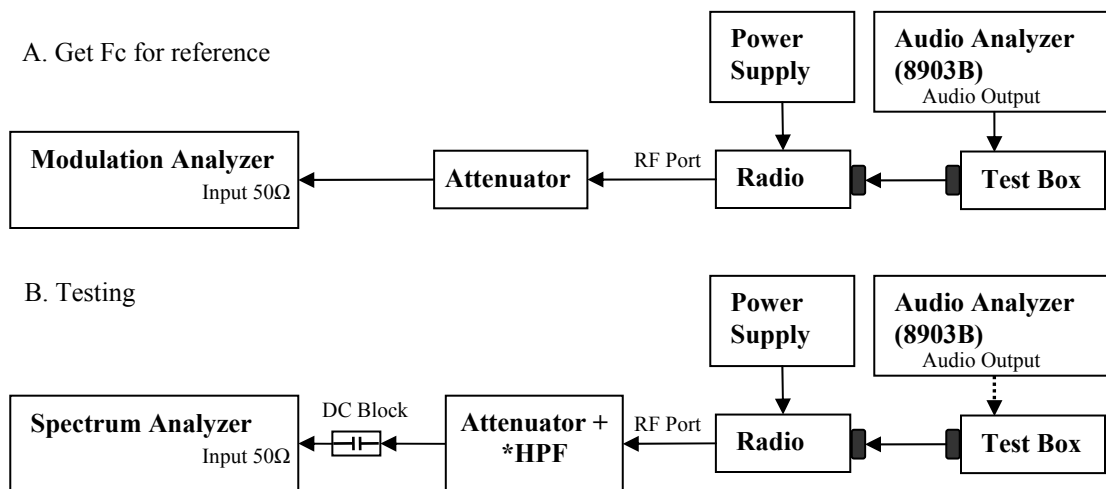




- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.



* Only HPF added for Mask 80.211 measurement with attenuator.



6.6.2. Test Result (Analog)

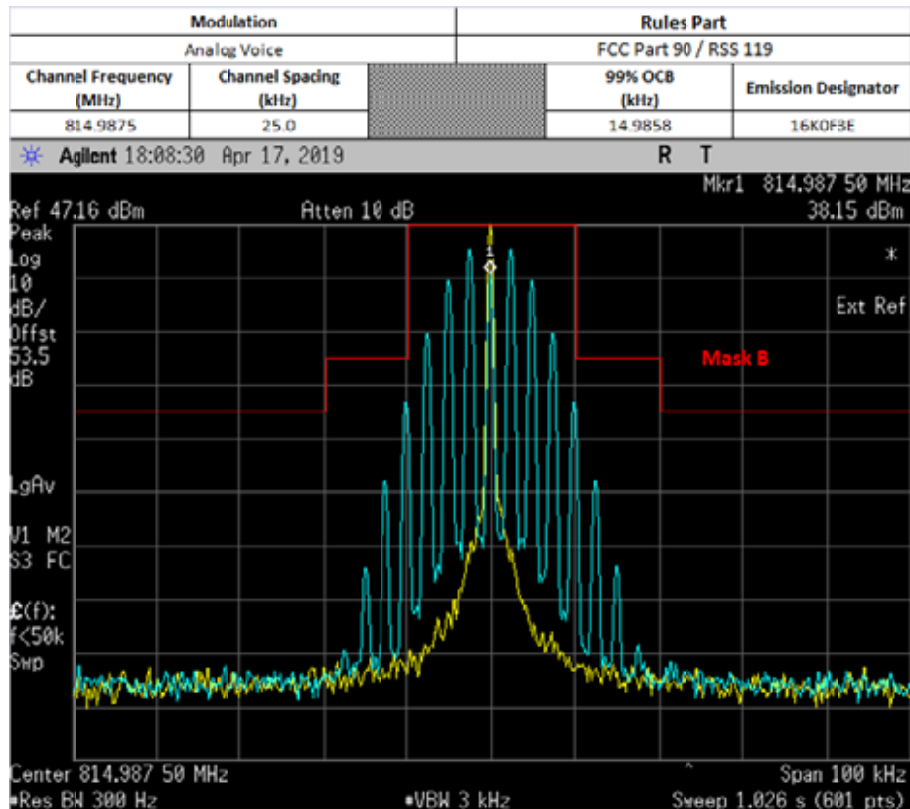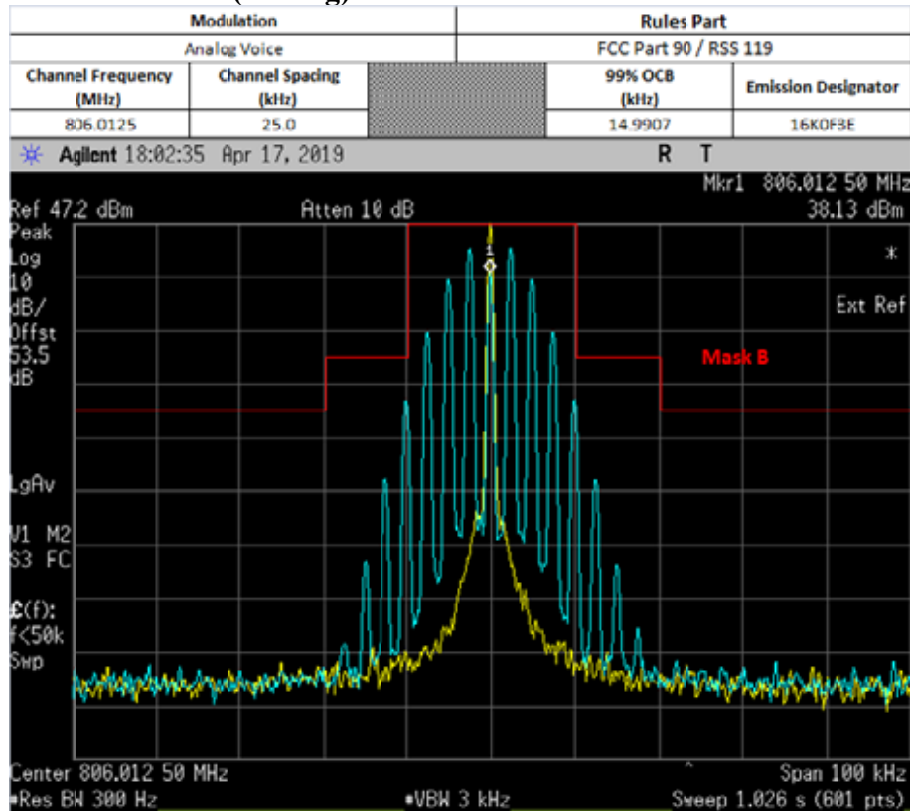


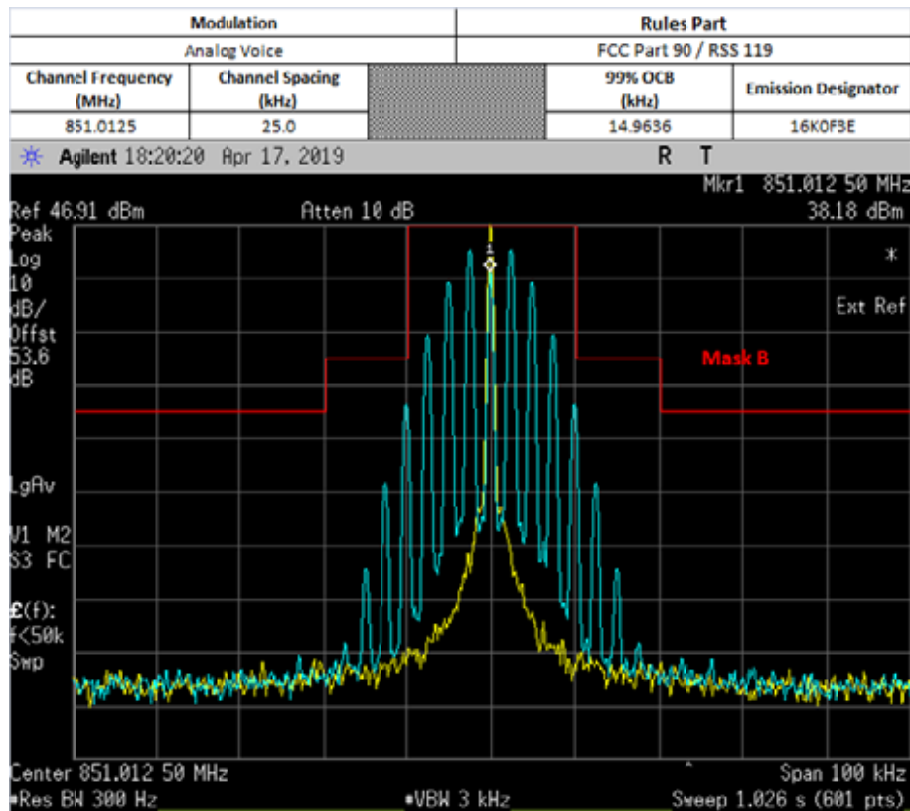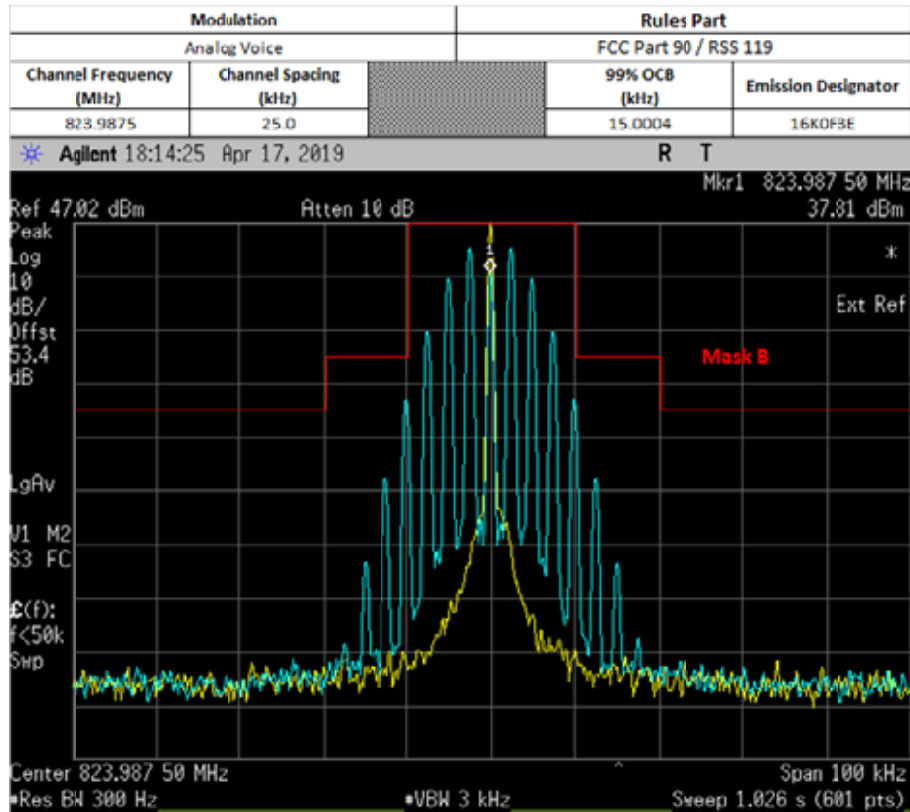

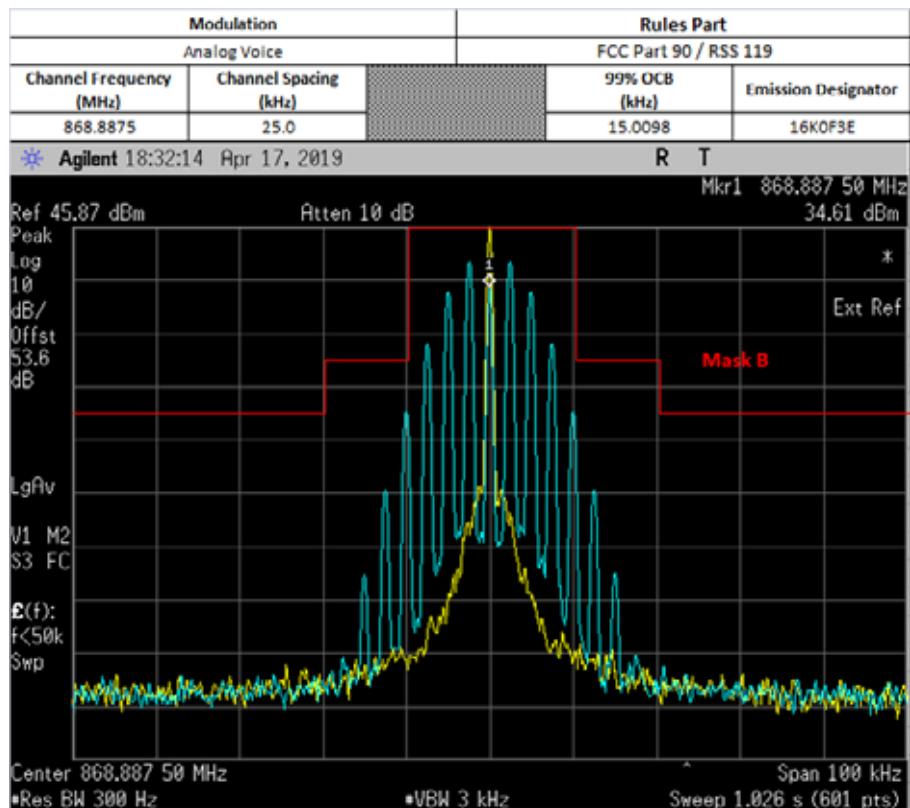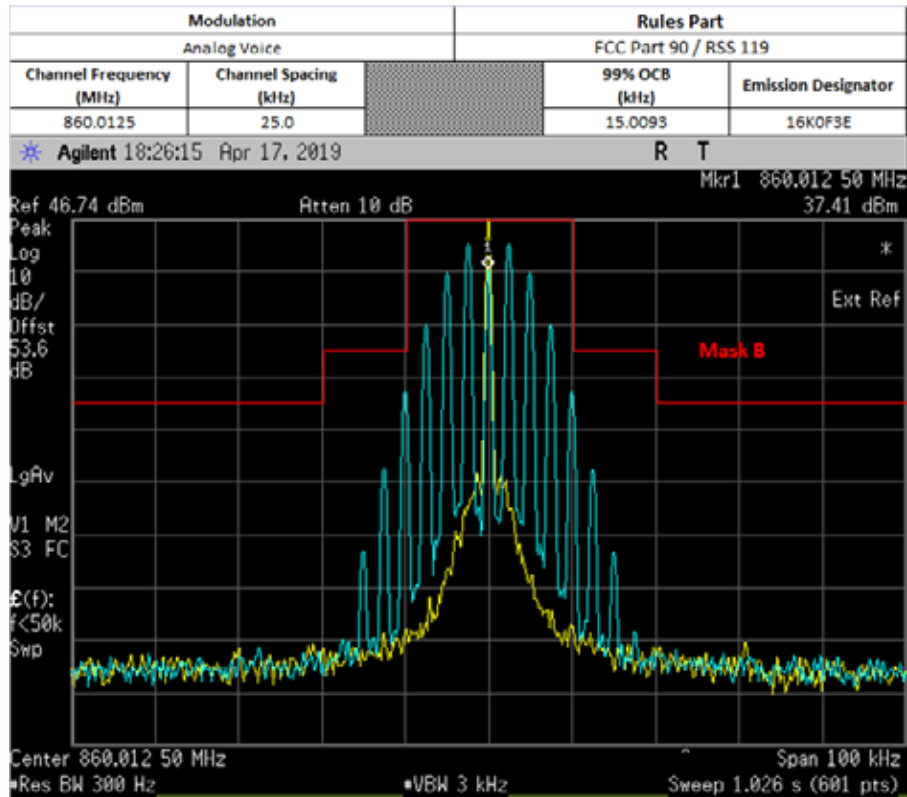


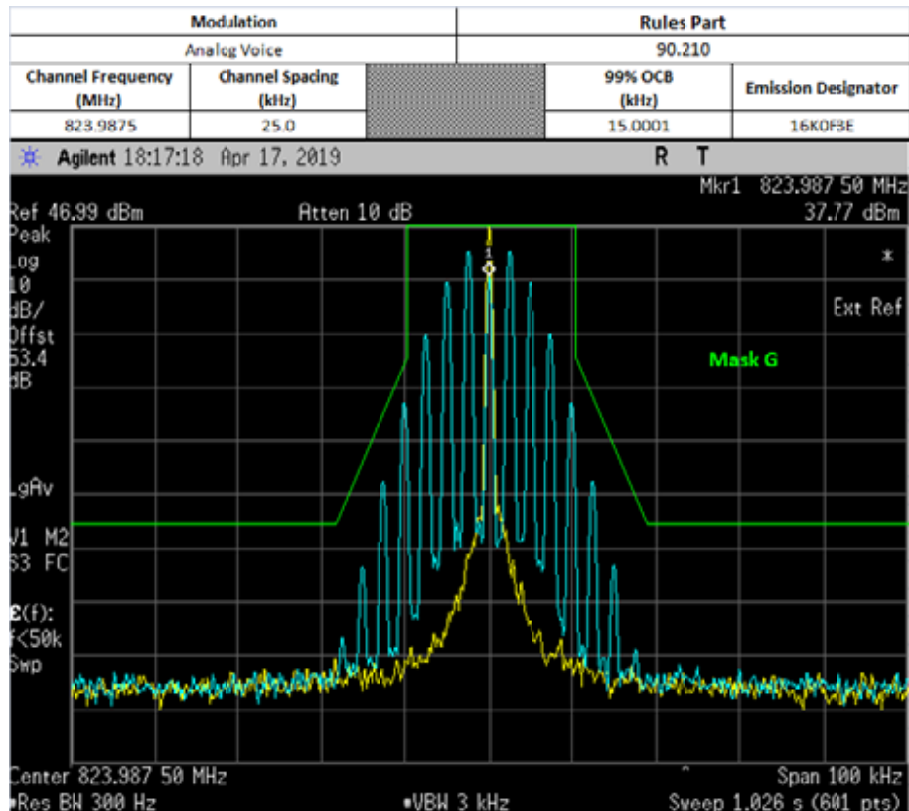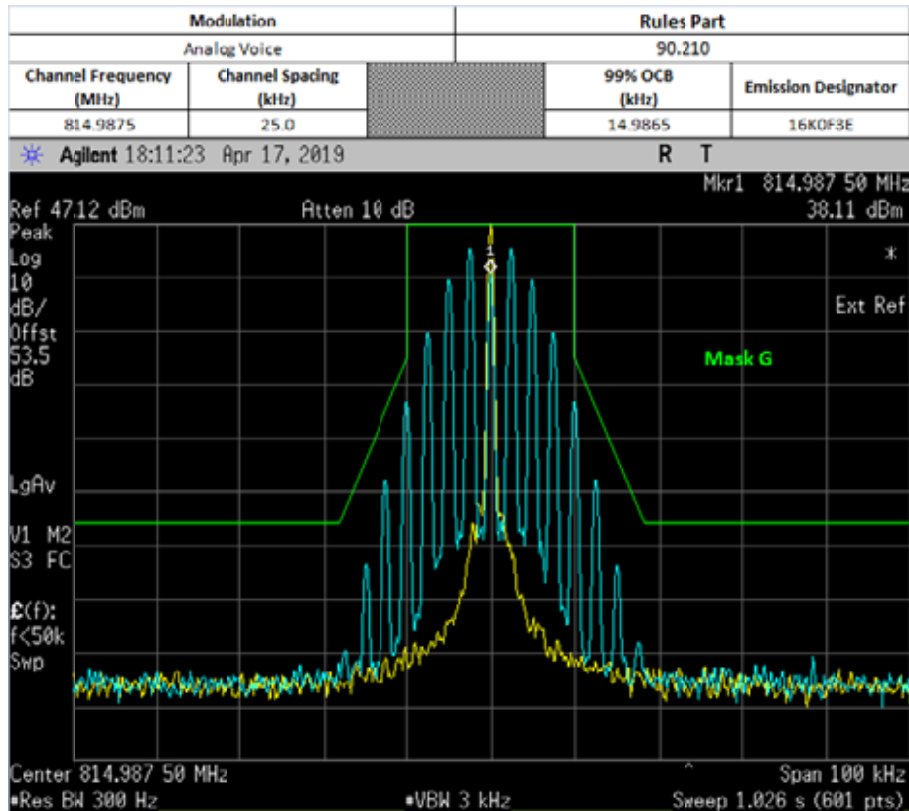

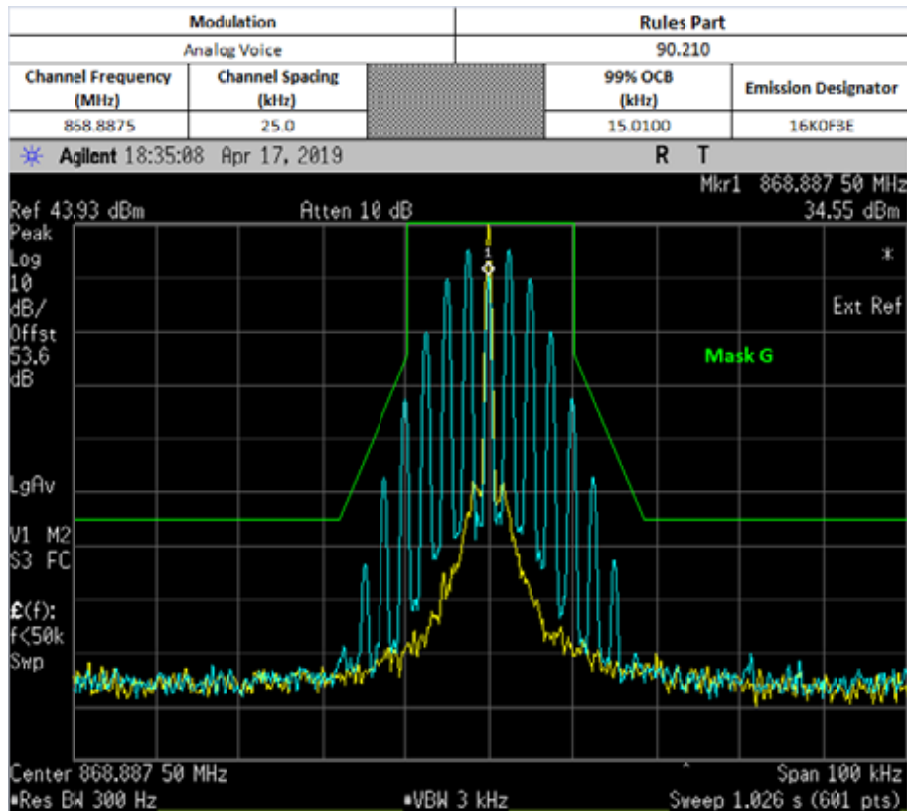
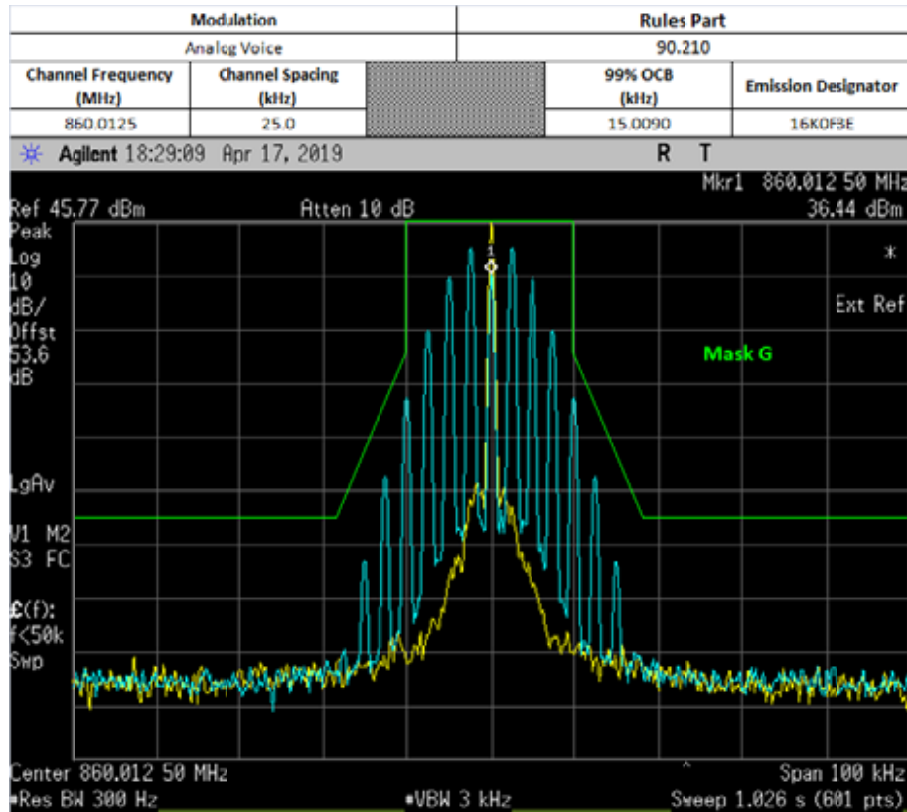



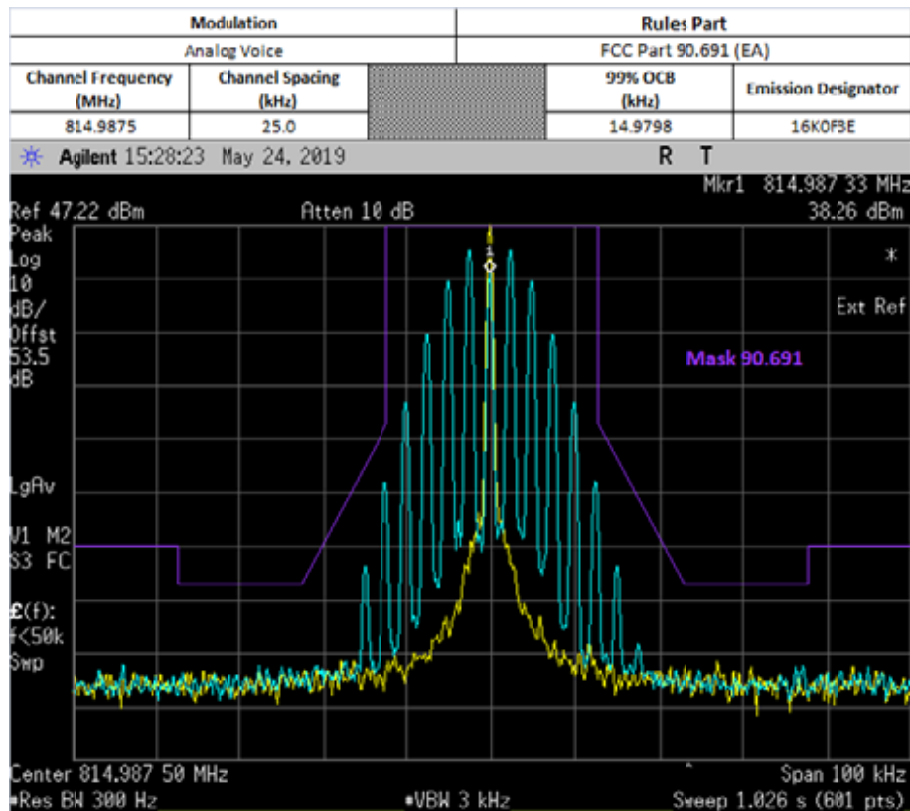




NOT FOR IC REVIEW


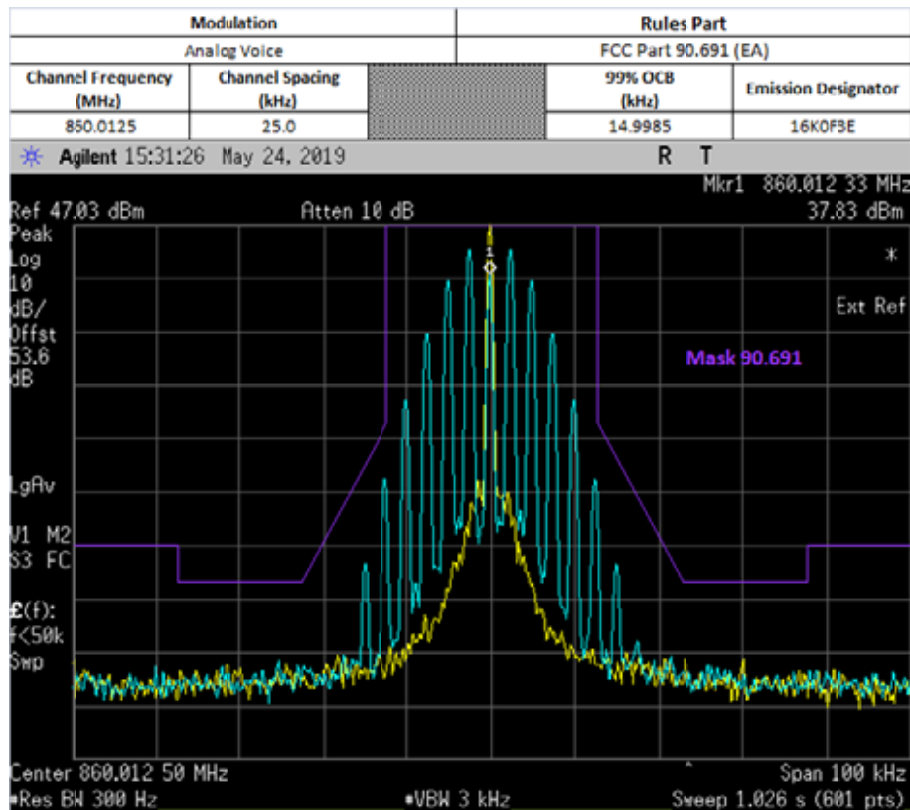




NOT FOR IC REVIEW

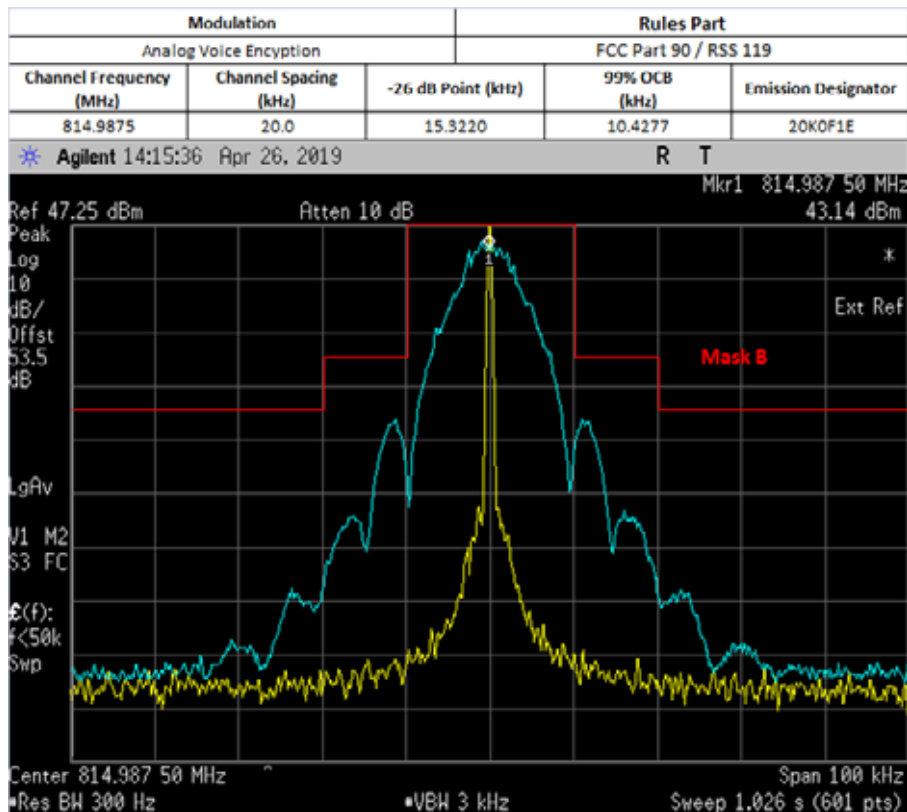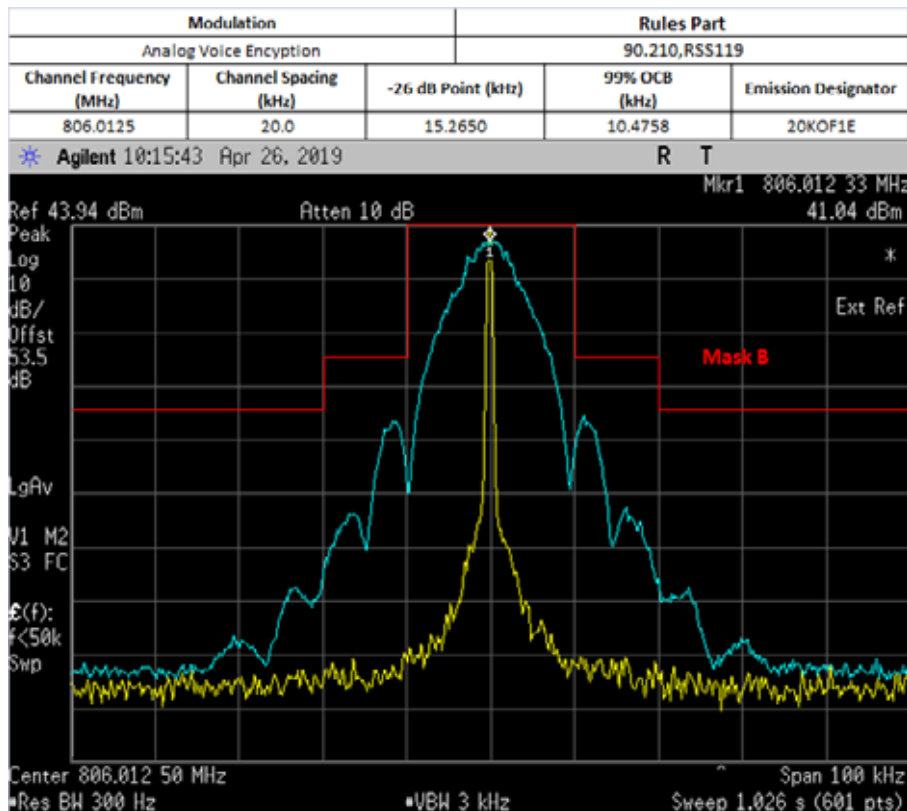


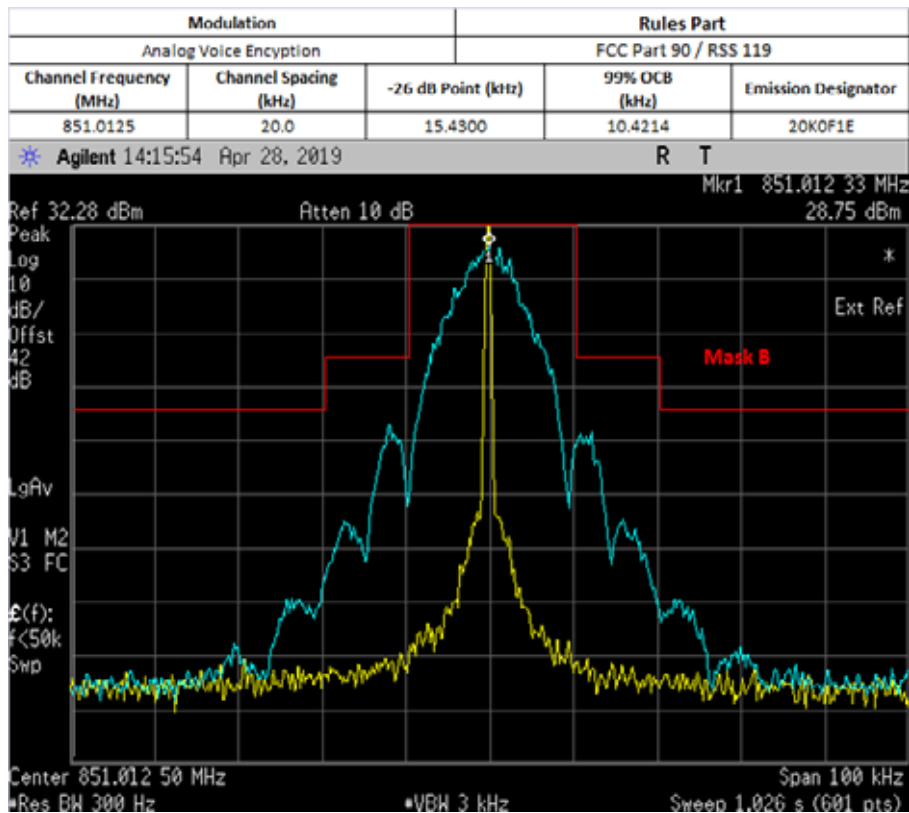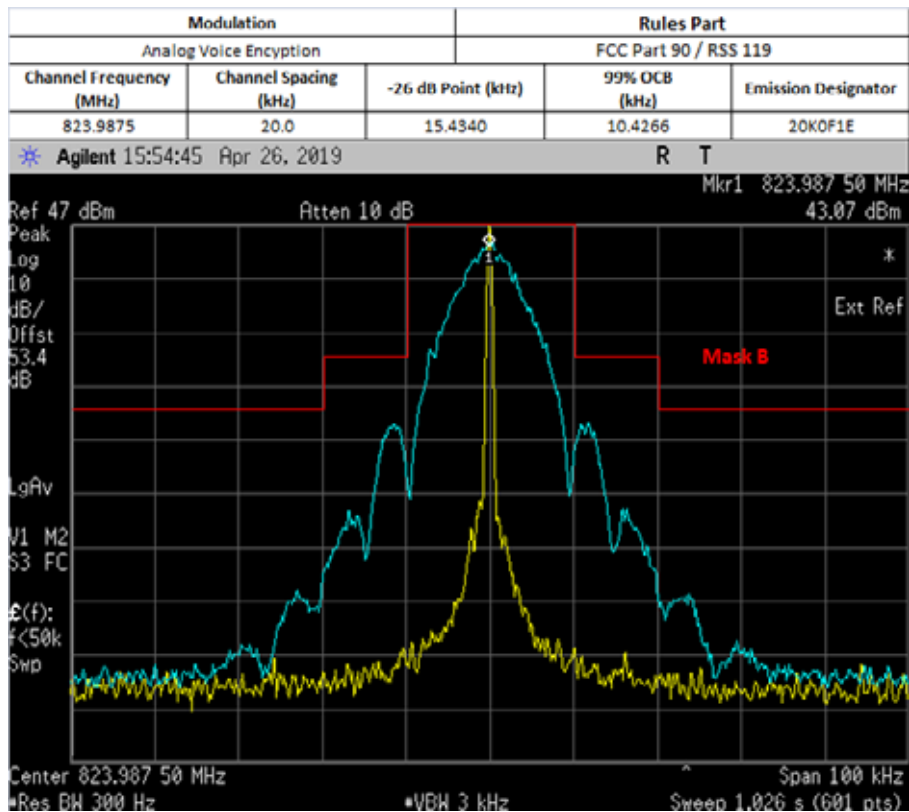

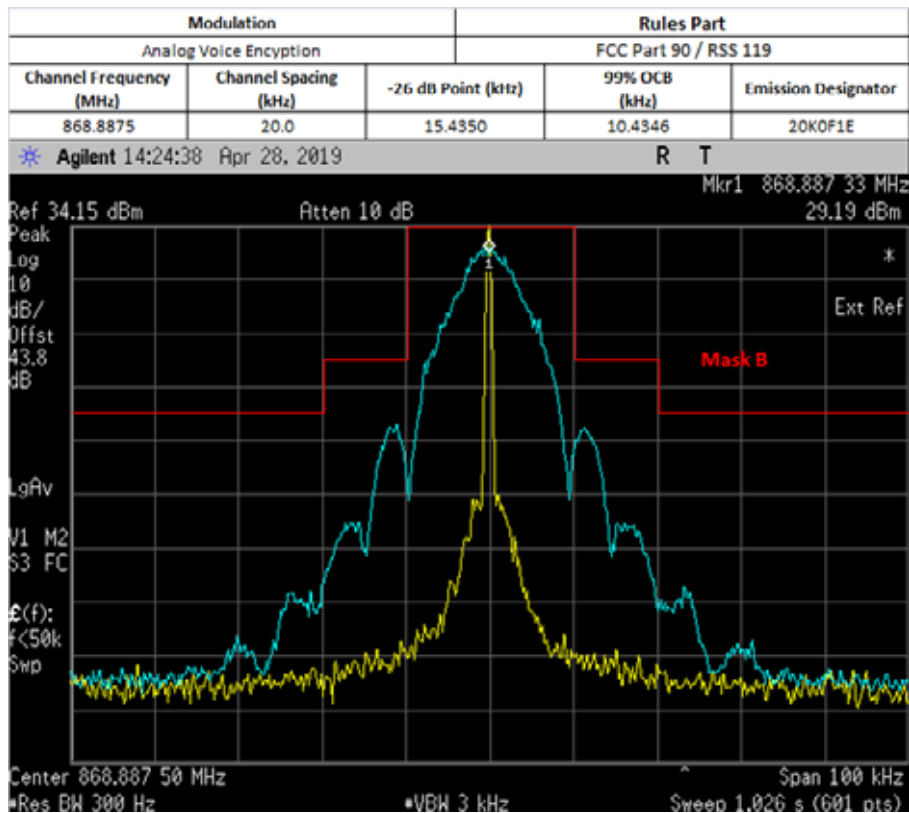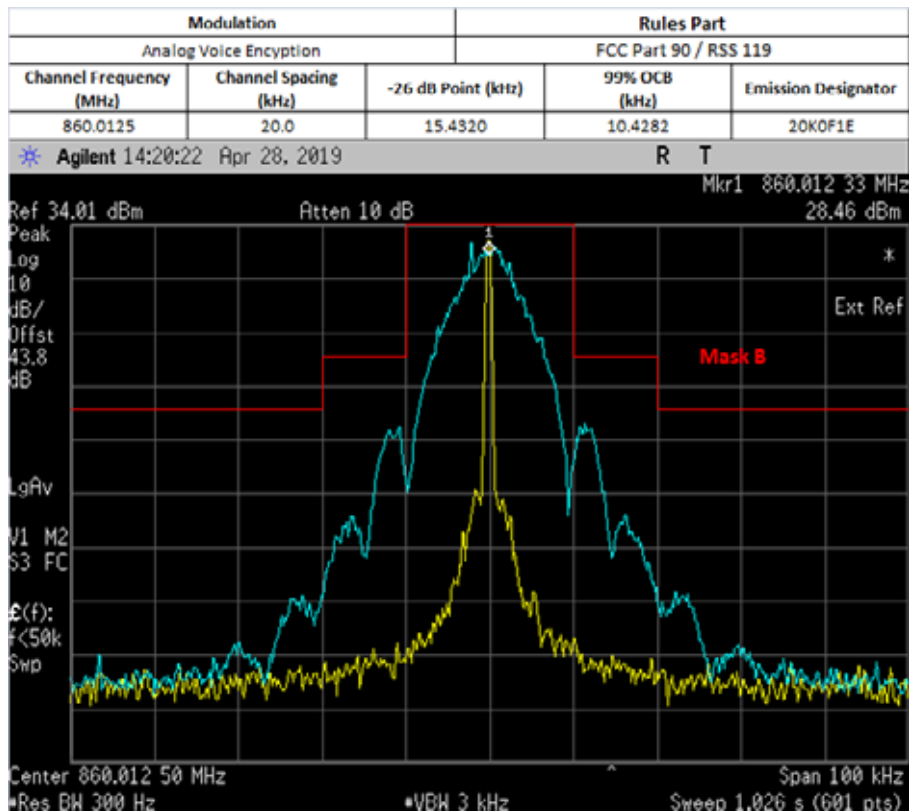


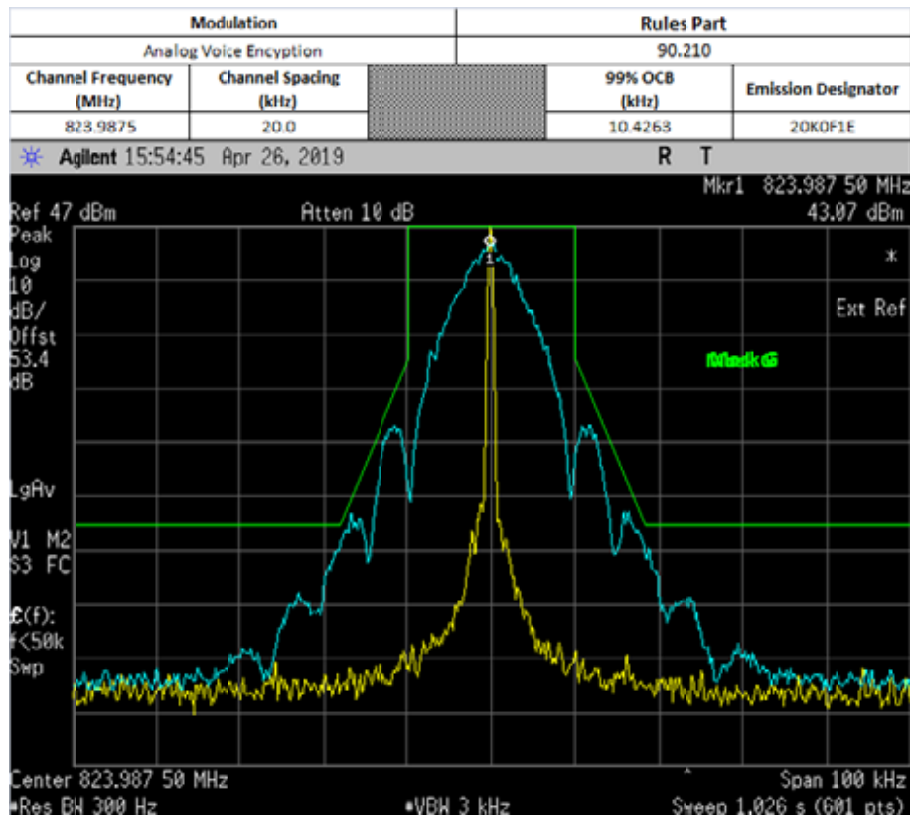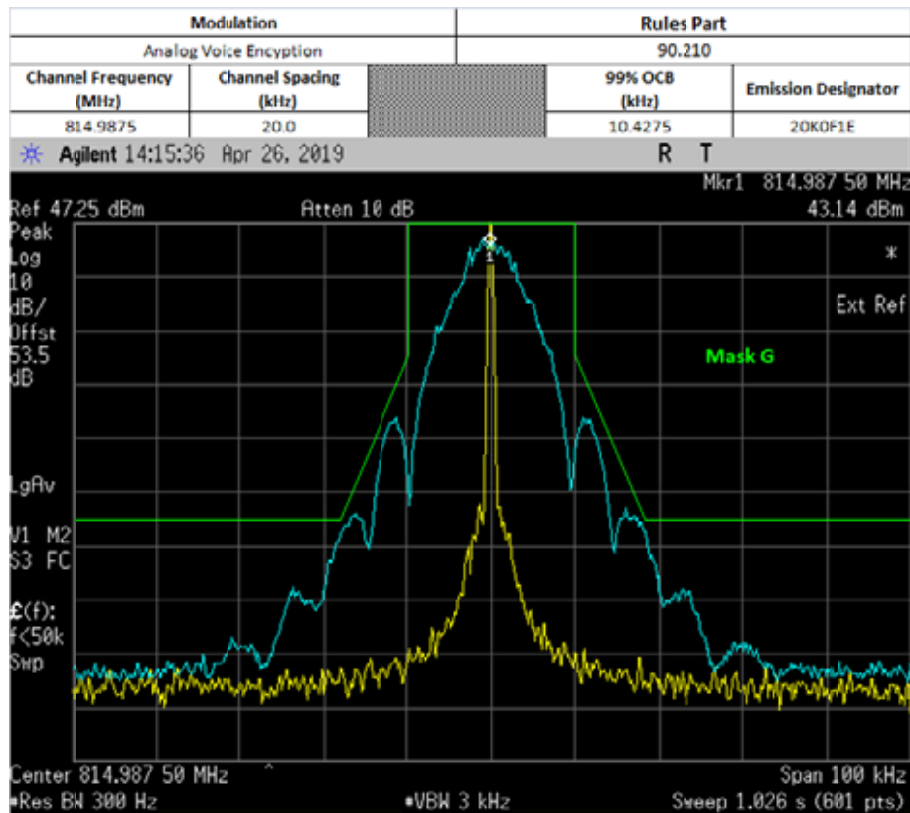

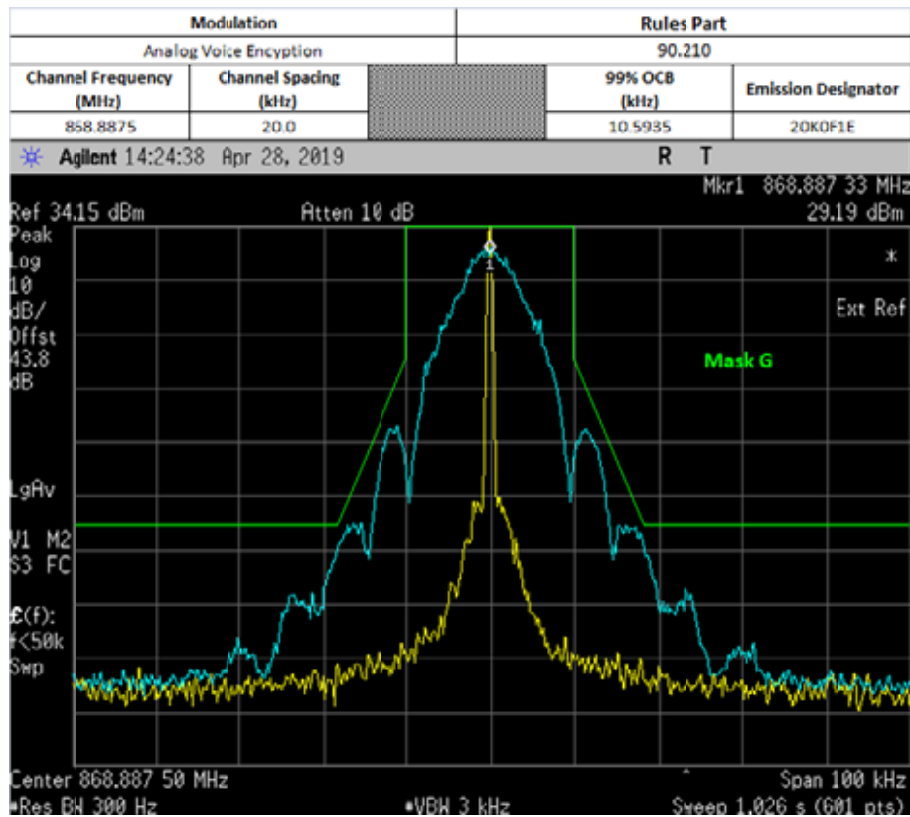
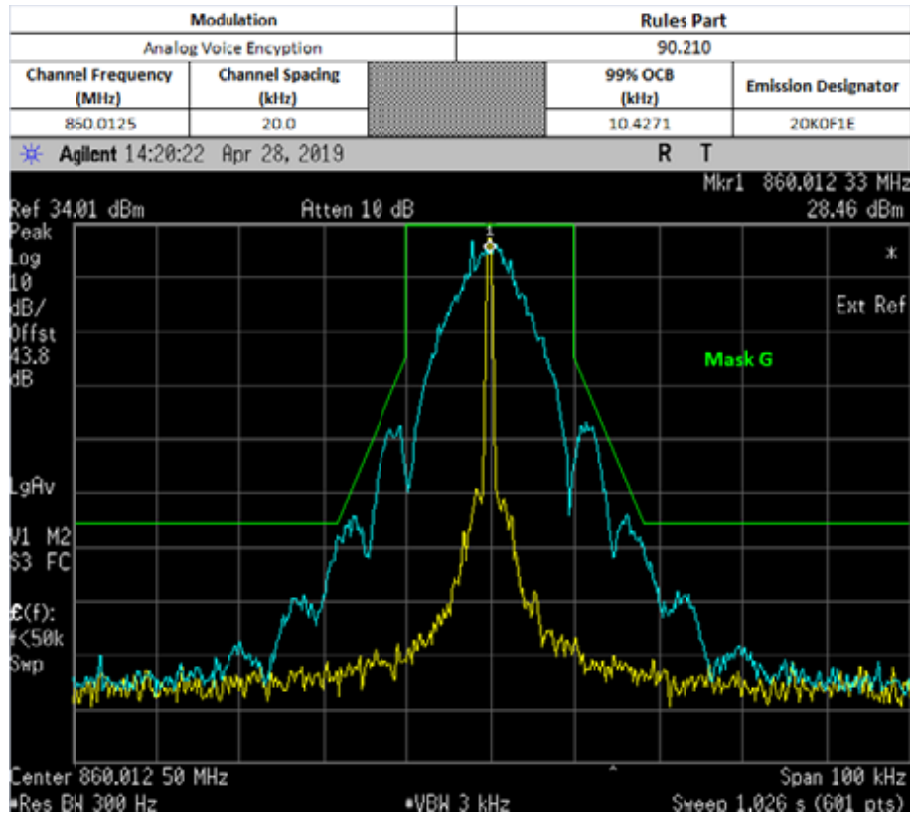



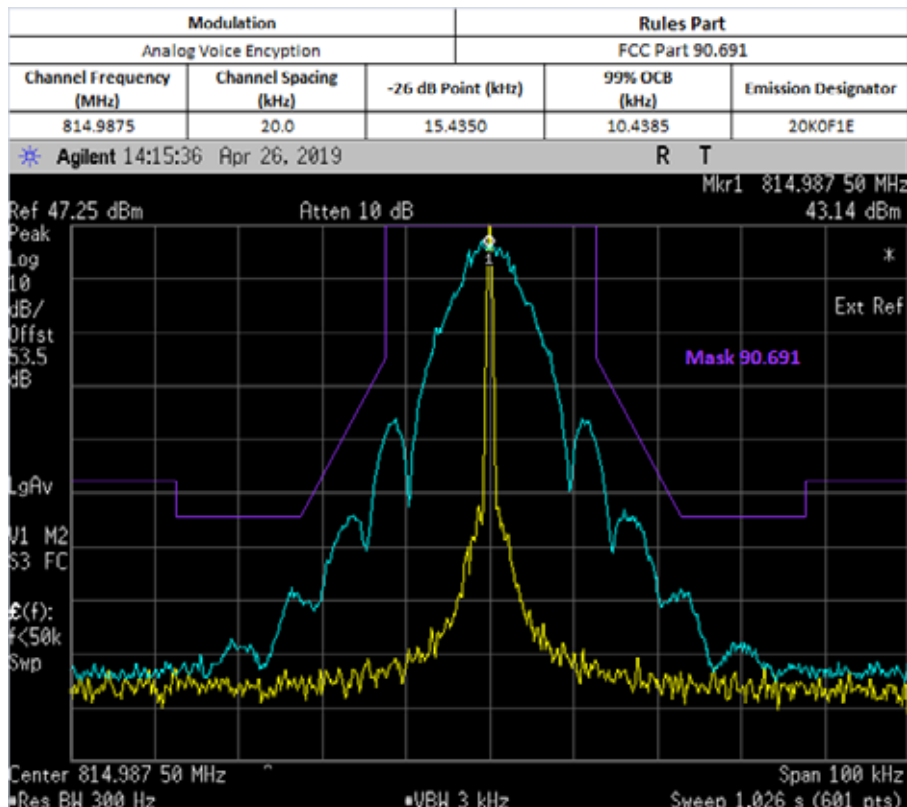




NOT FOR IC REVIEW

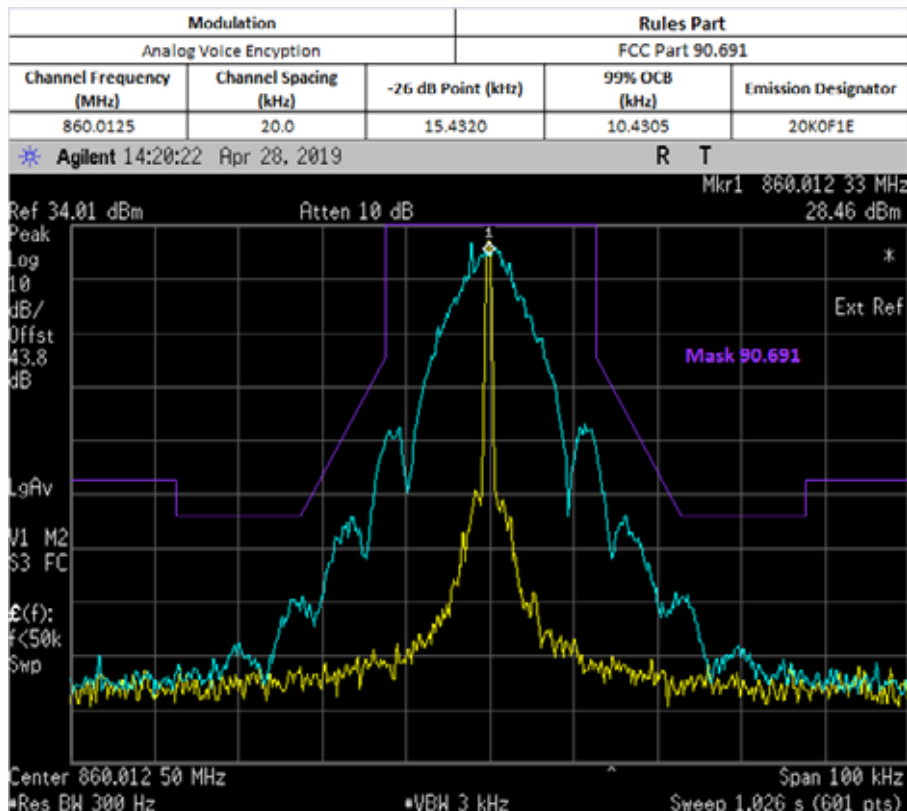


NOT FOR IC REVIEW

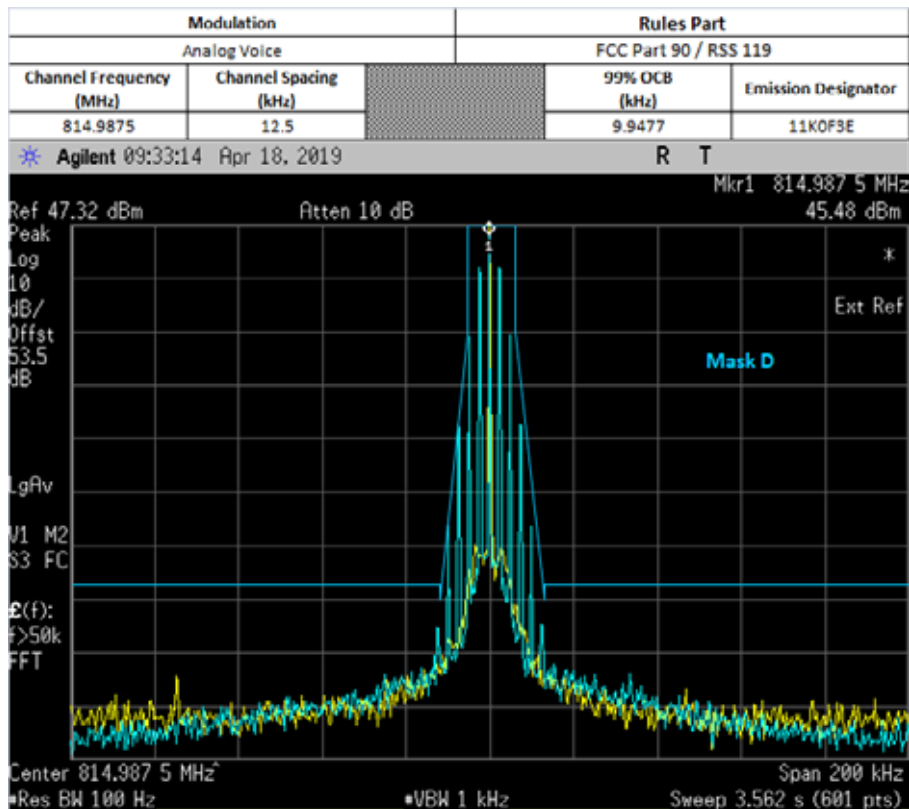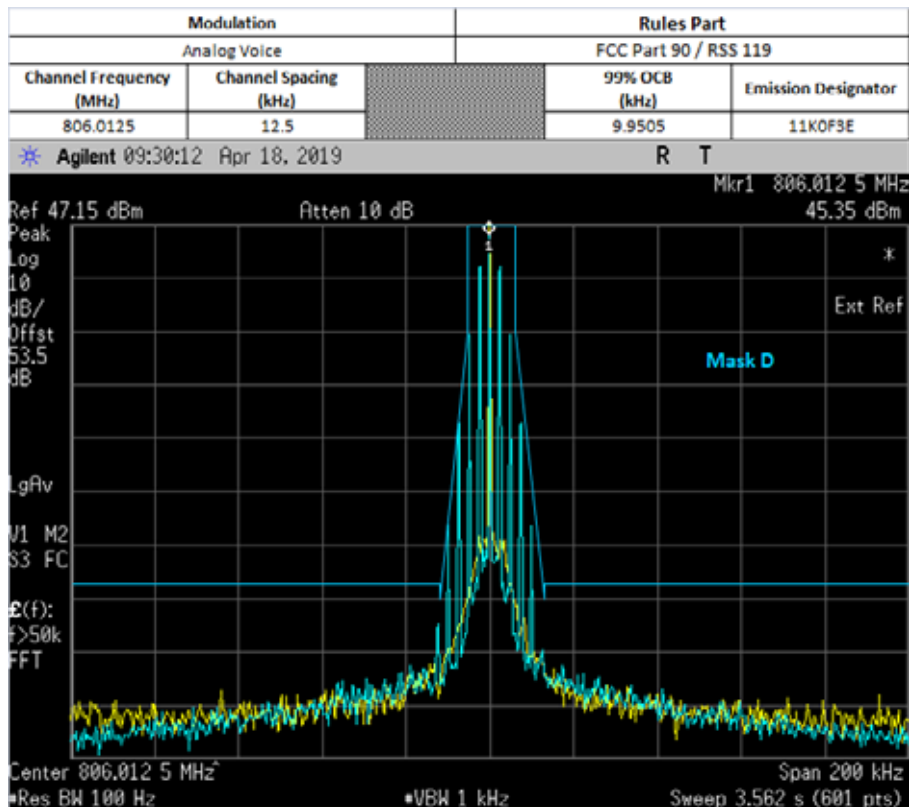


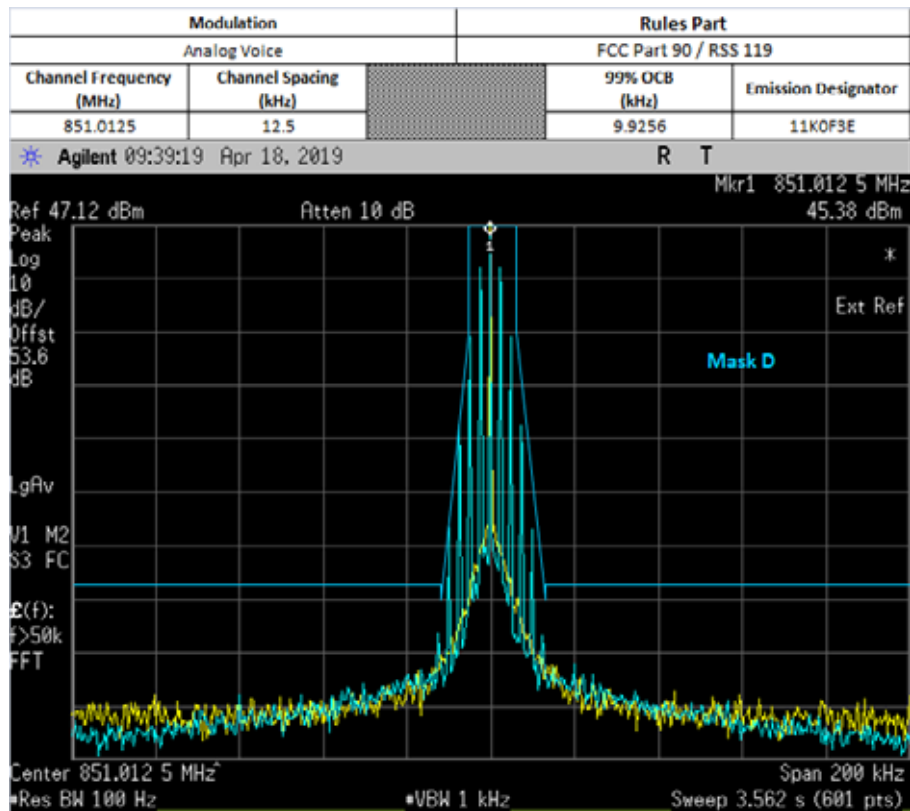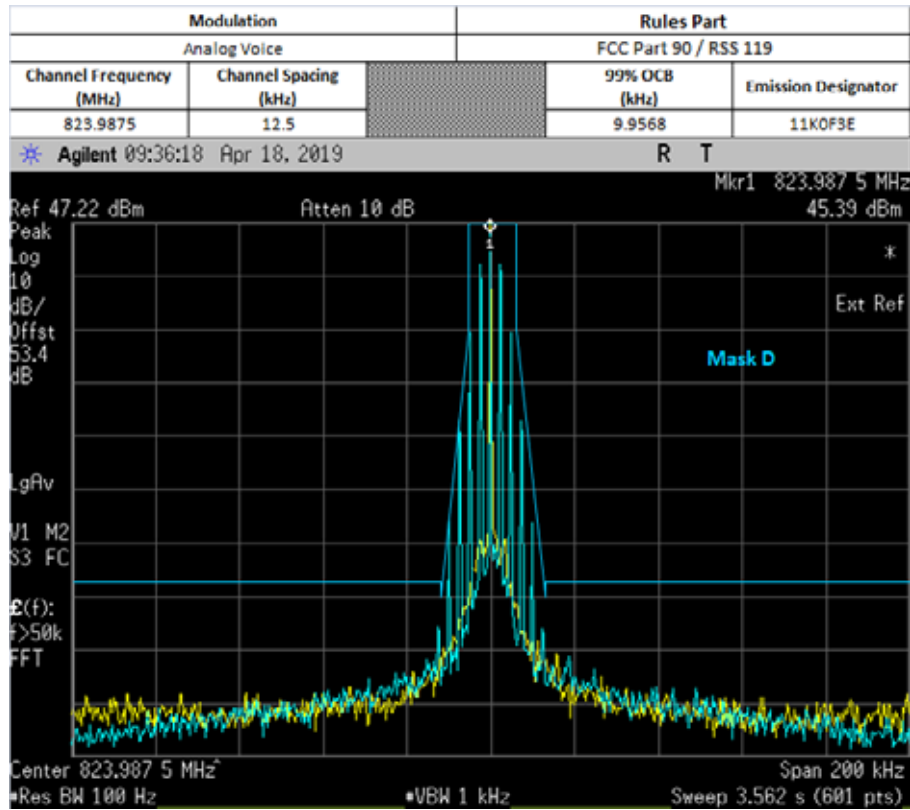

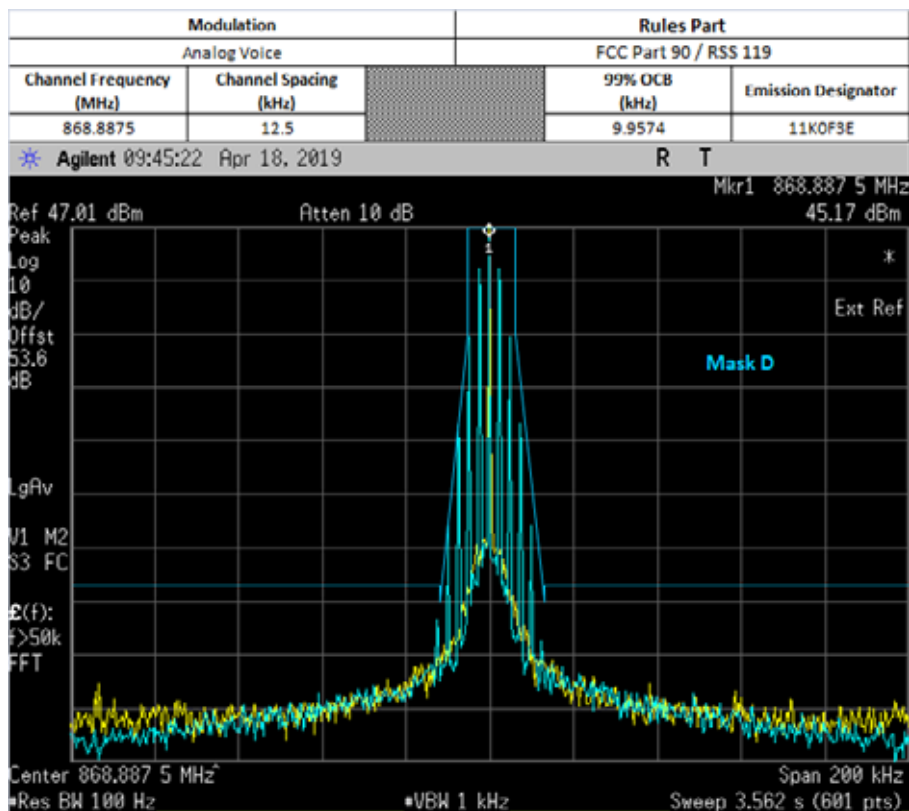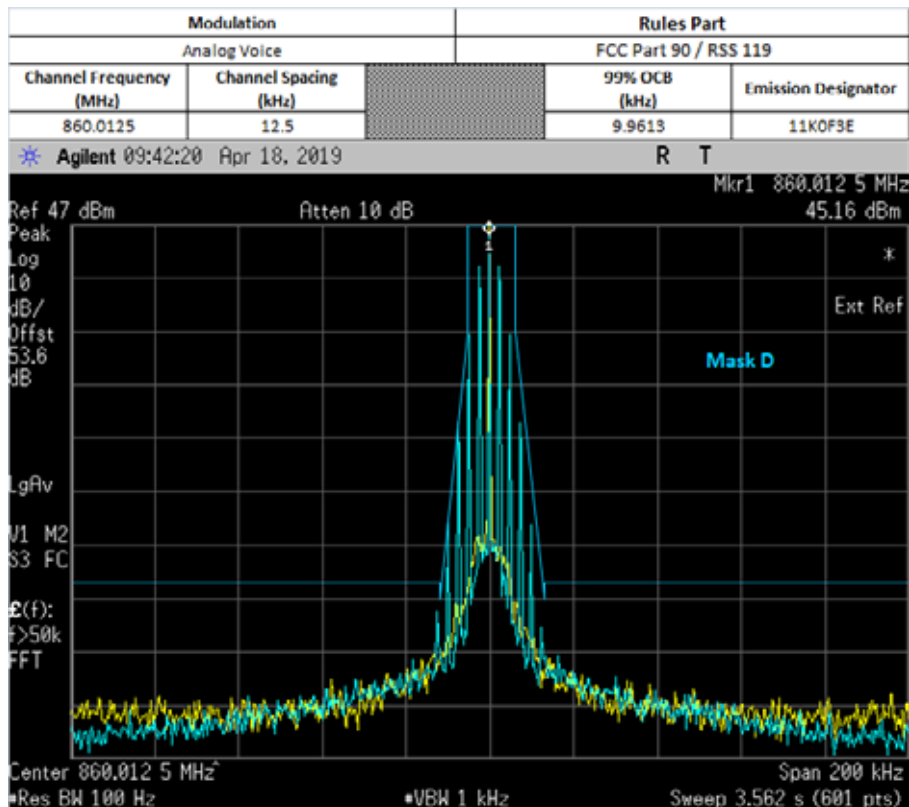

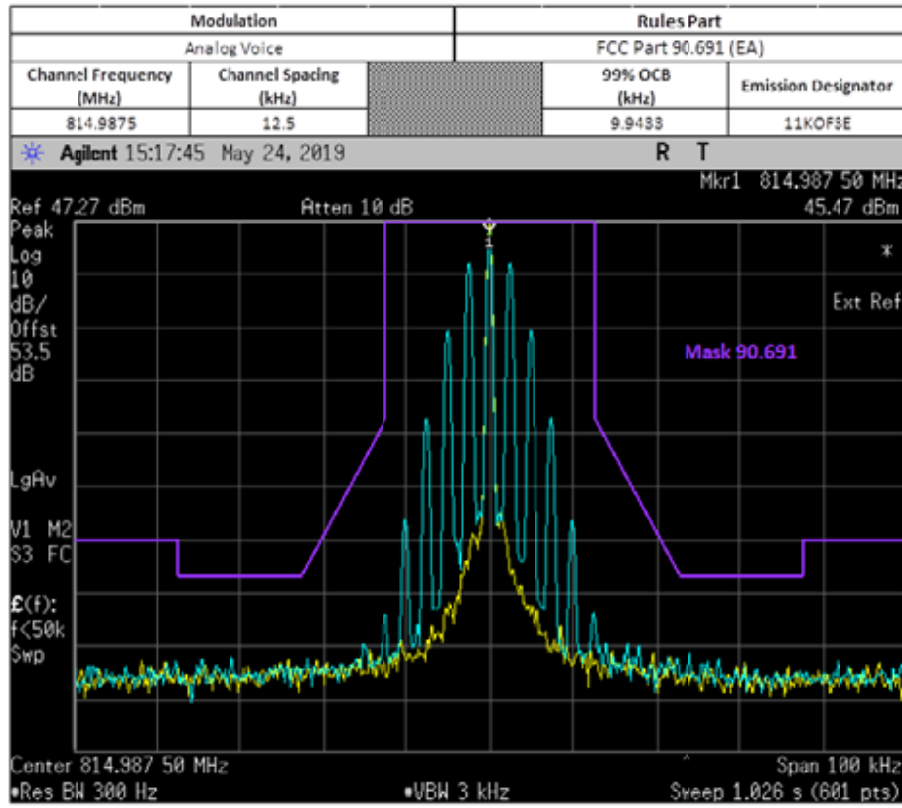


NOT FOR IC REVIEW

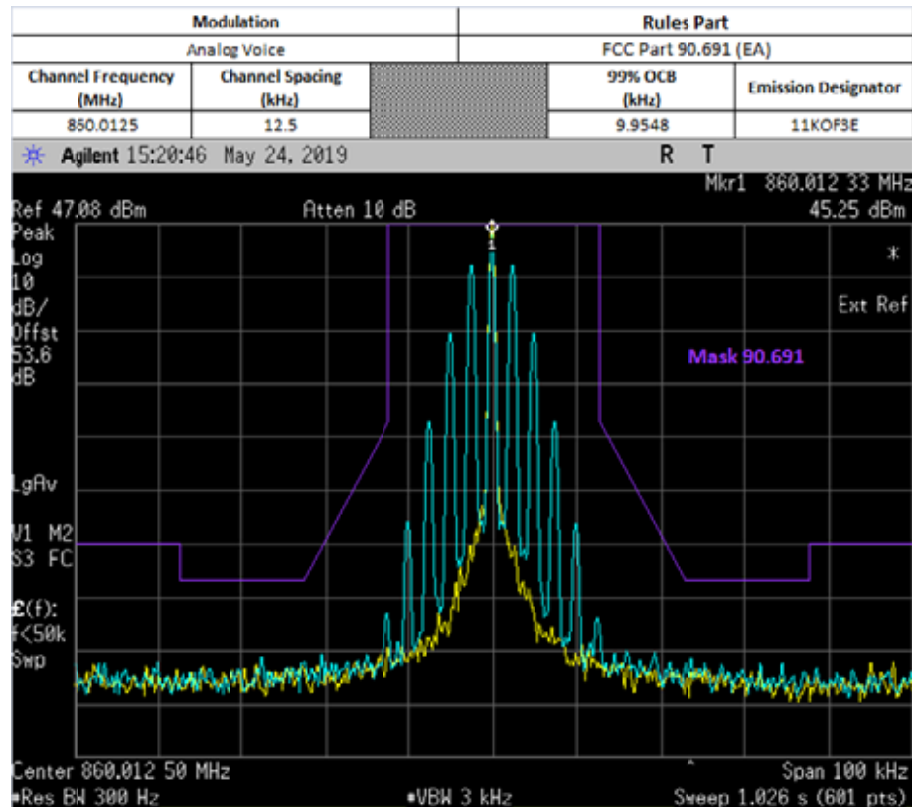

NOT FOR IC REVIEW

6.6.3. Test Setup (Digital)


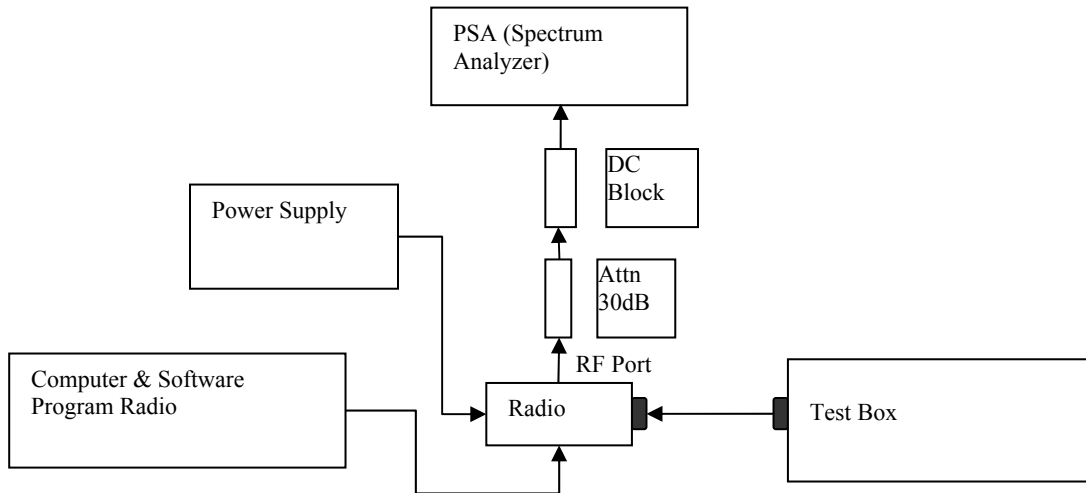




- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.



*Note:


- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.6.4. Test Result (Digital)

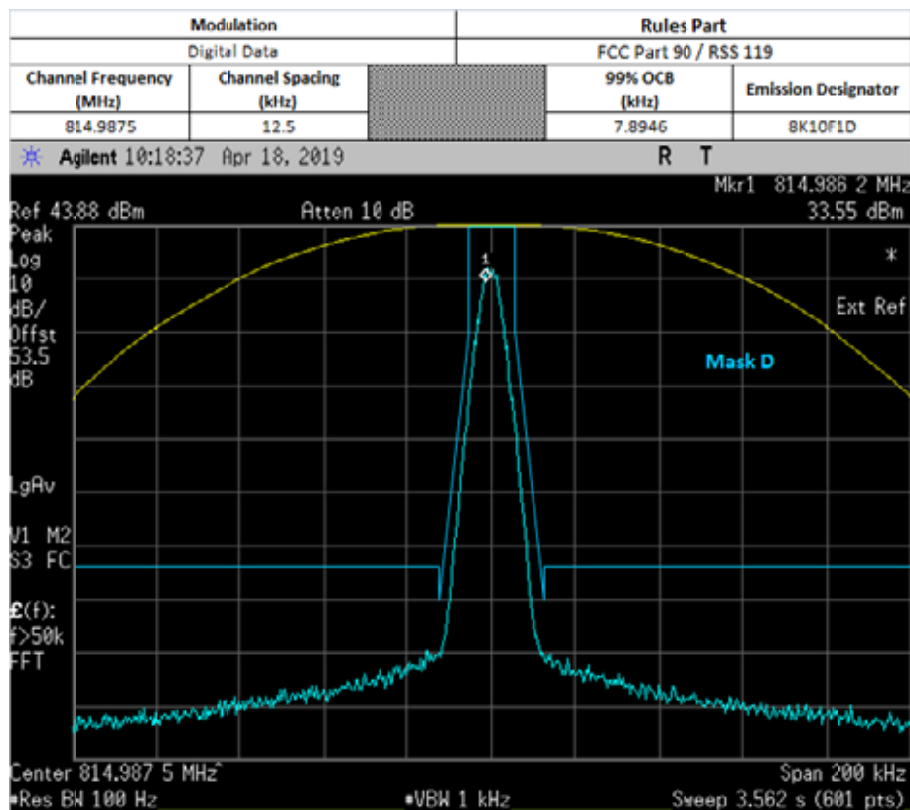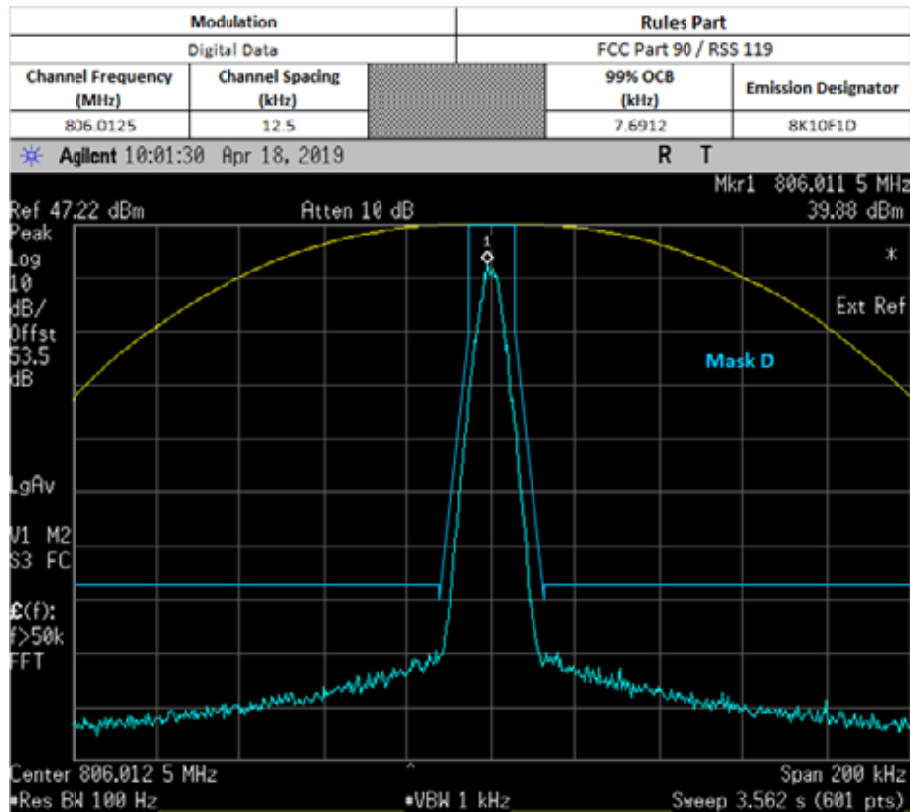


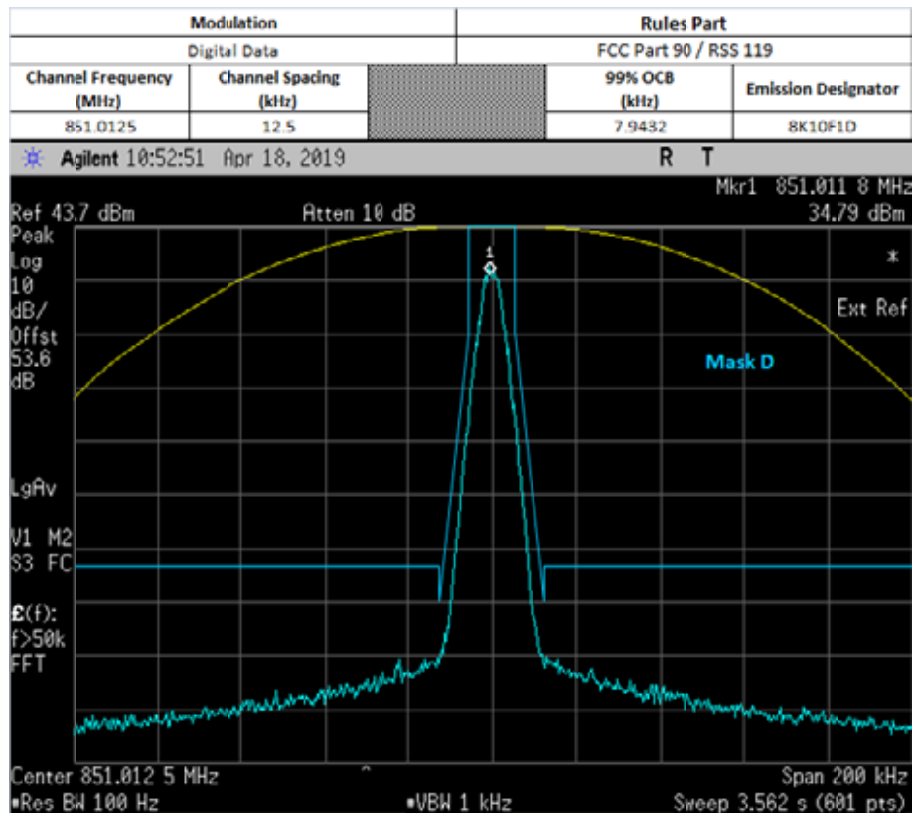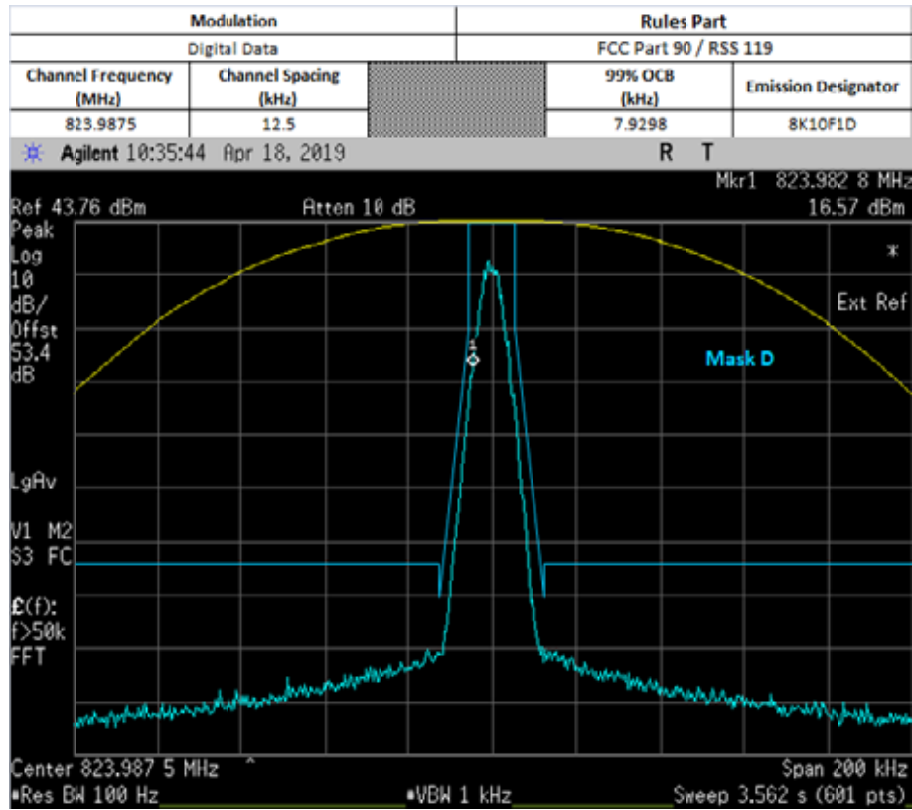

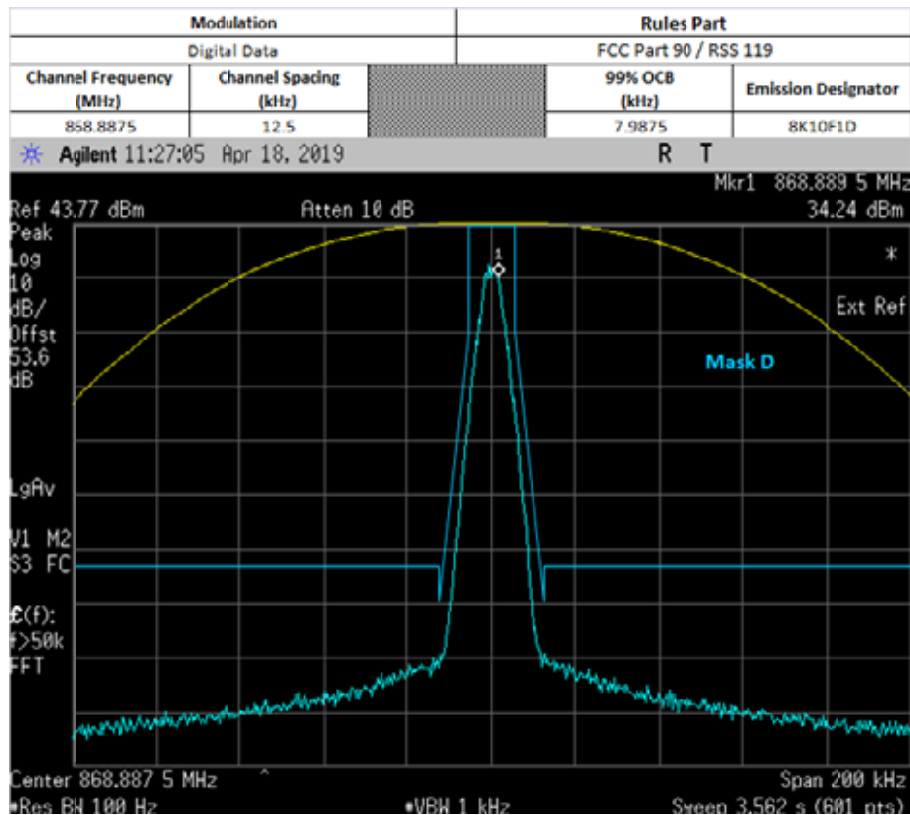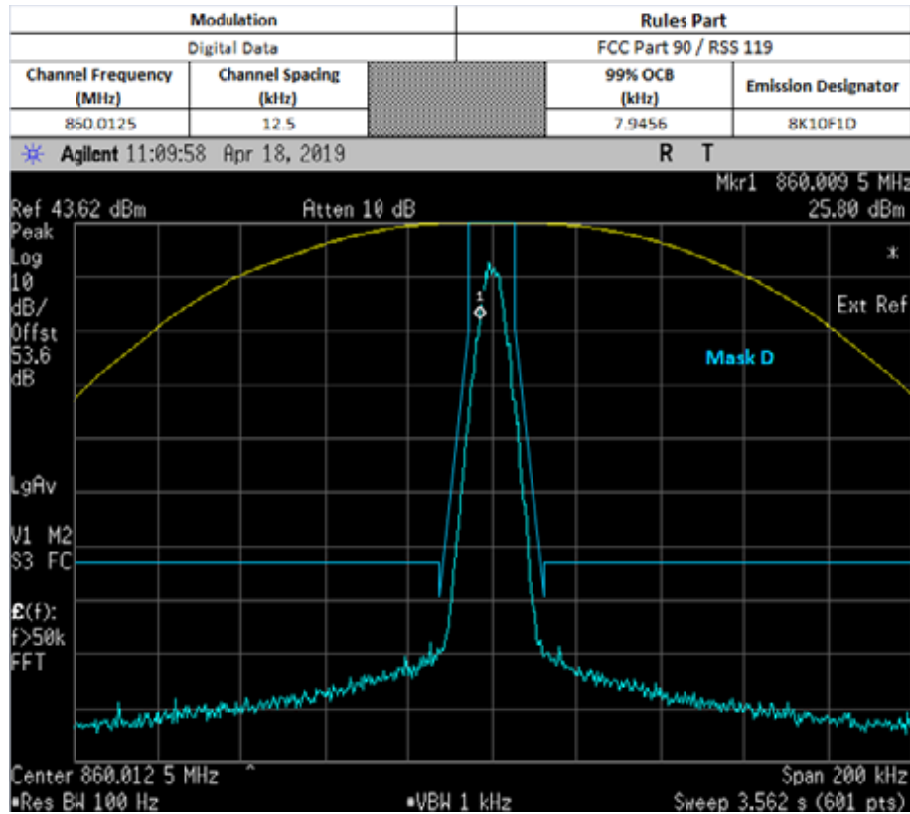


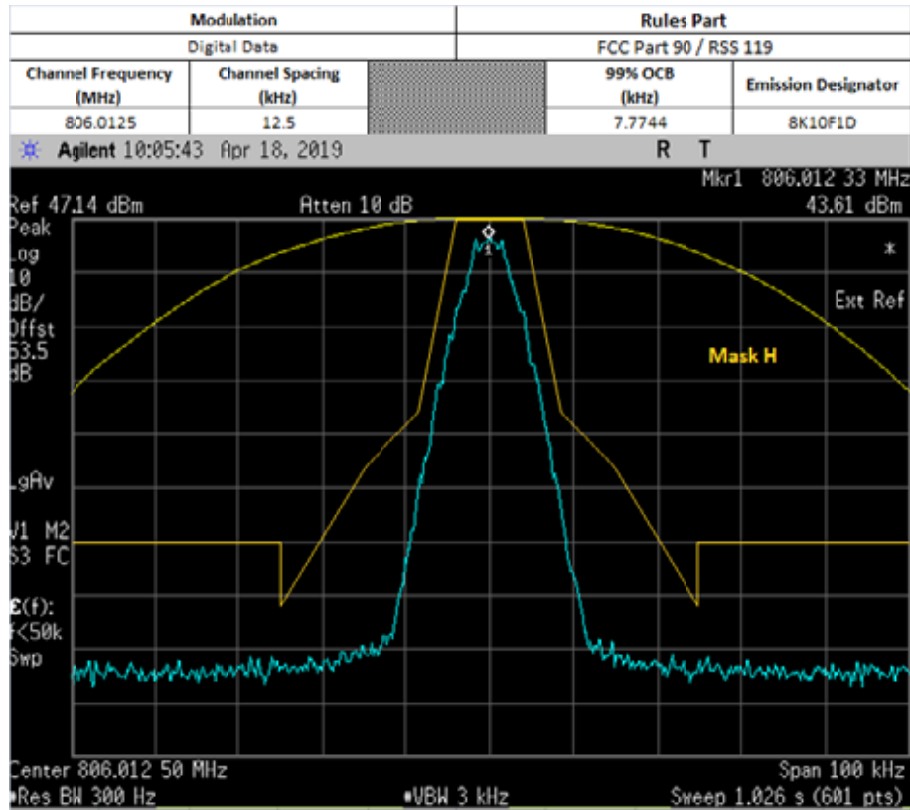


NOT FOR IC REVIEW

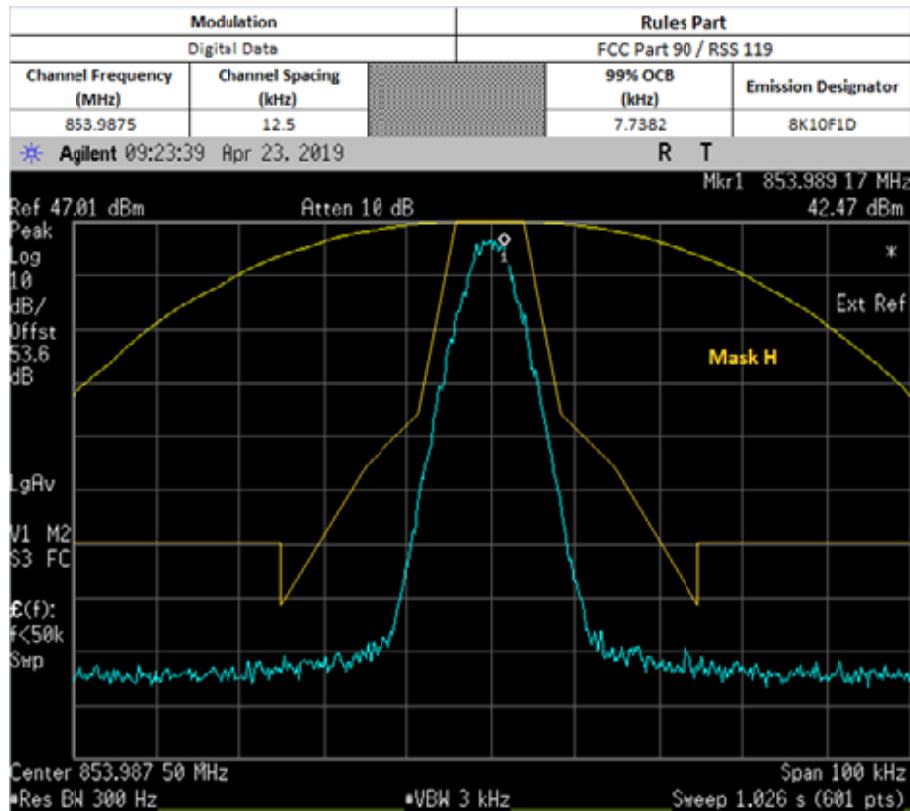



NOT FOR IC REVIEW


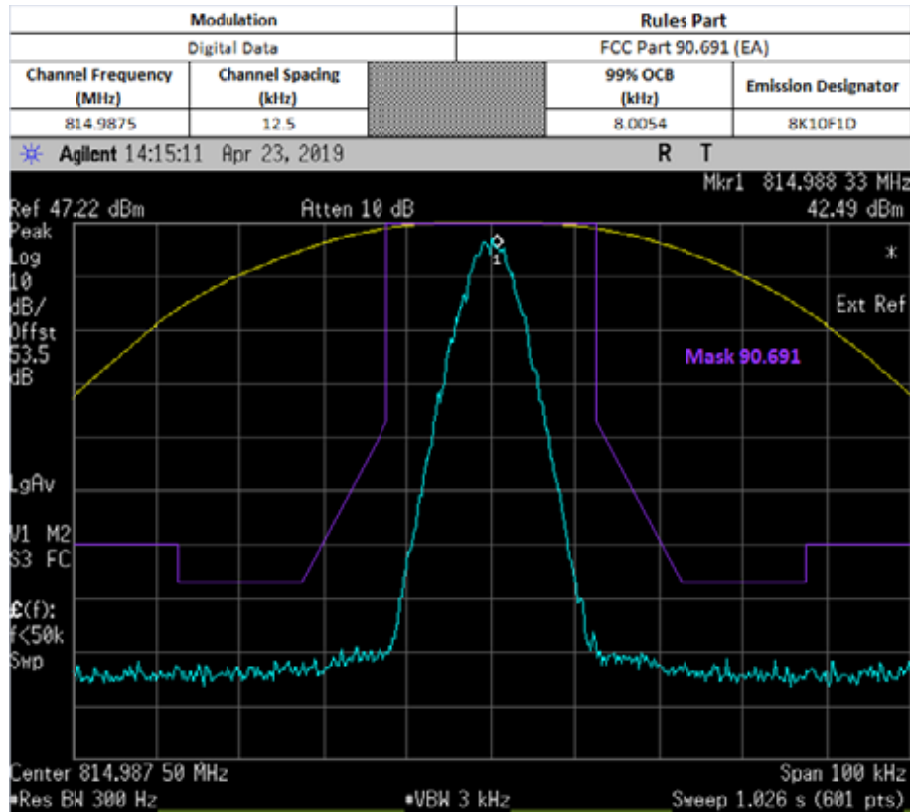




NOT FOR IC REVIEW

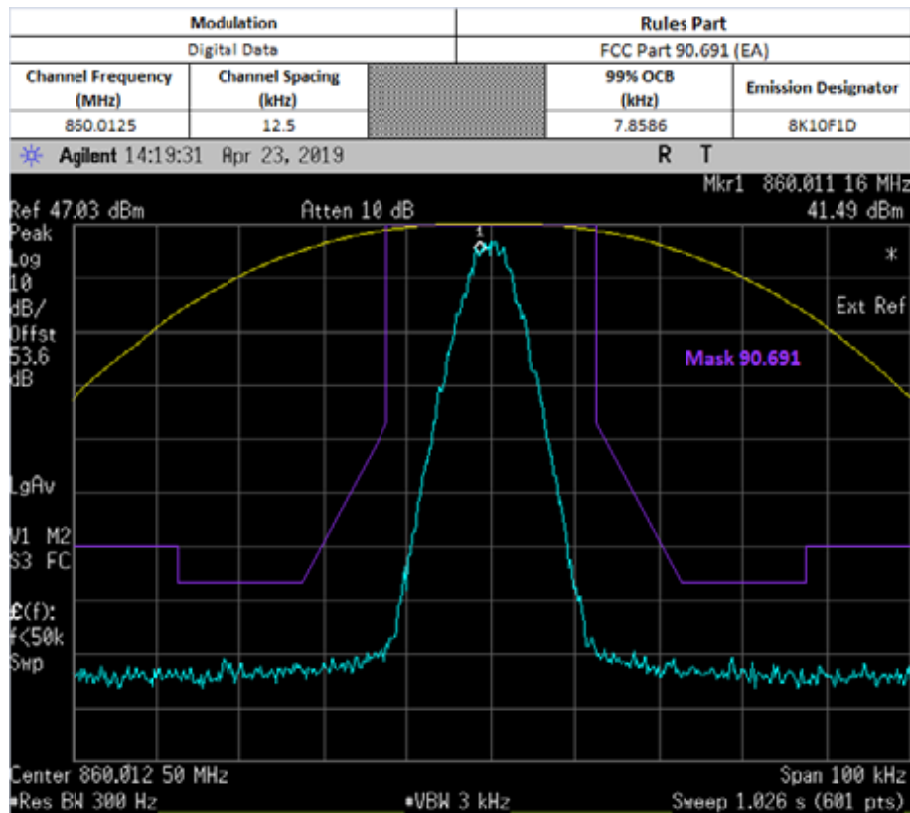


NOT FOR IC REVIEW

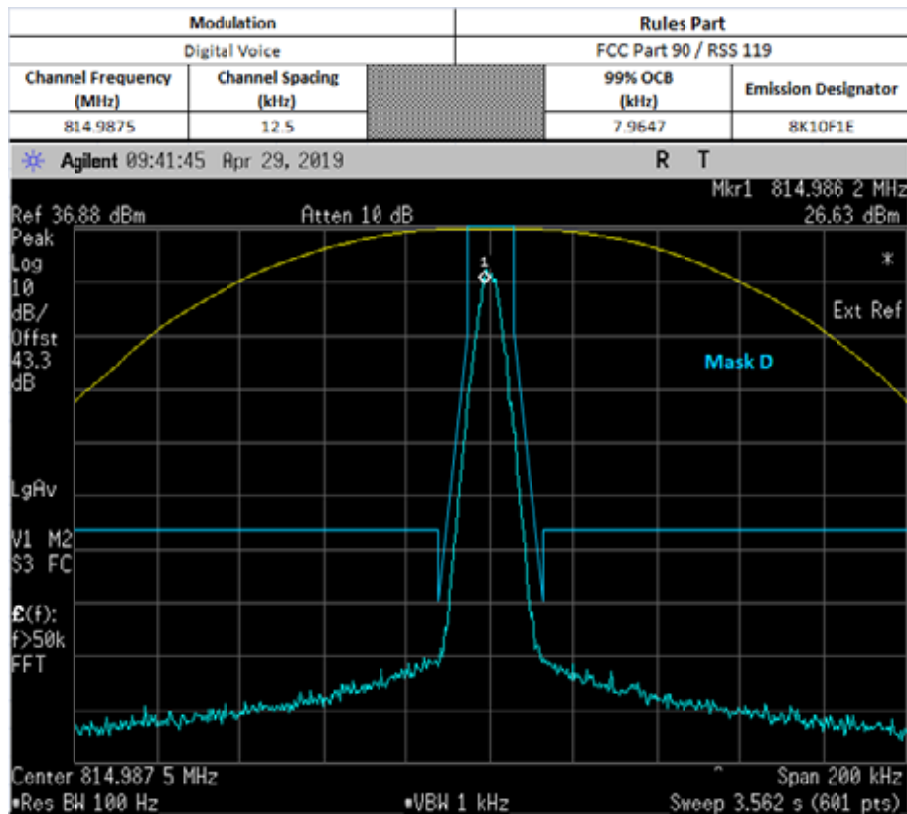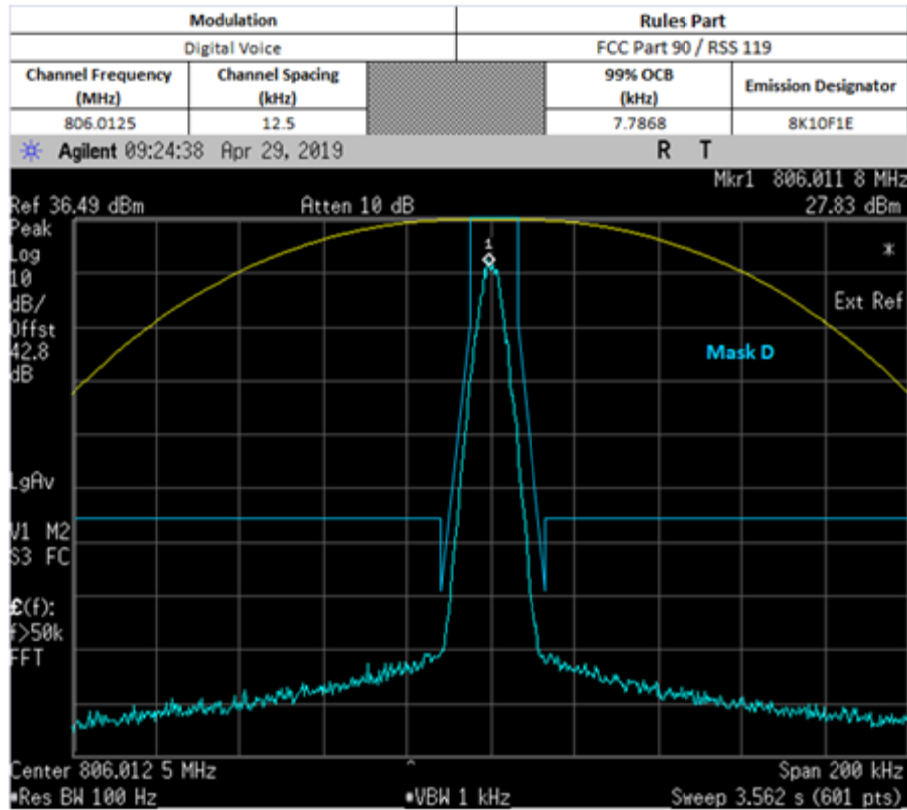


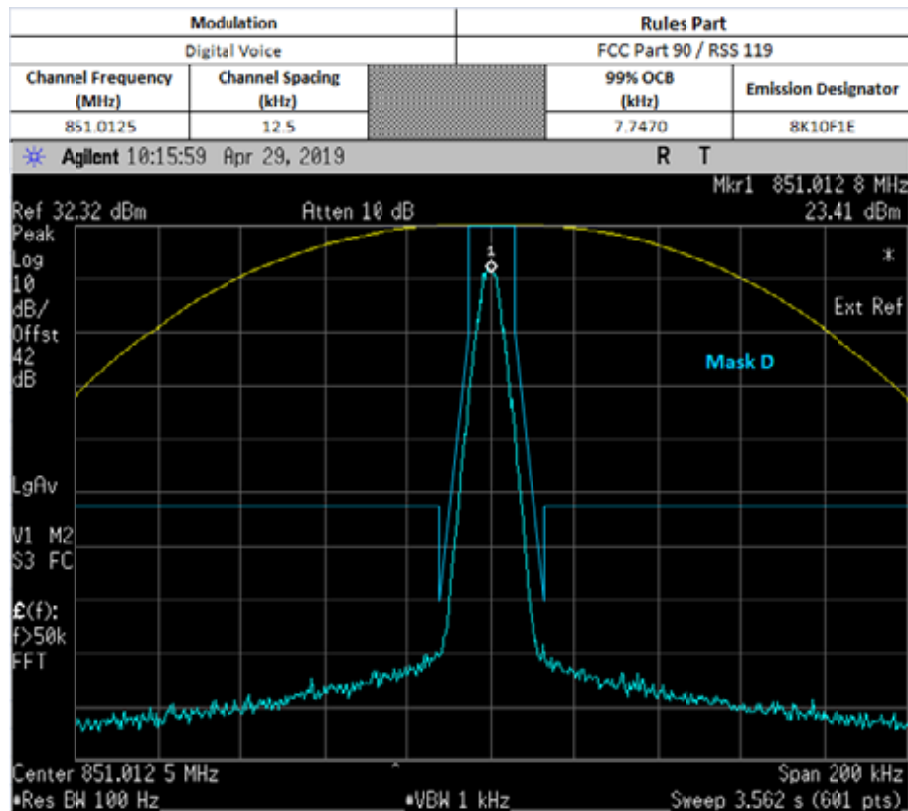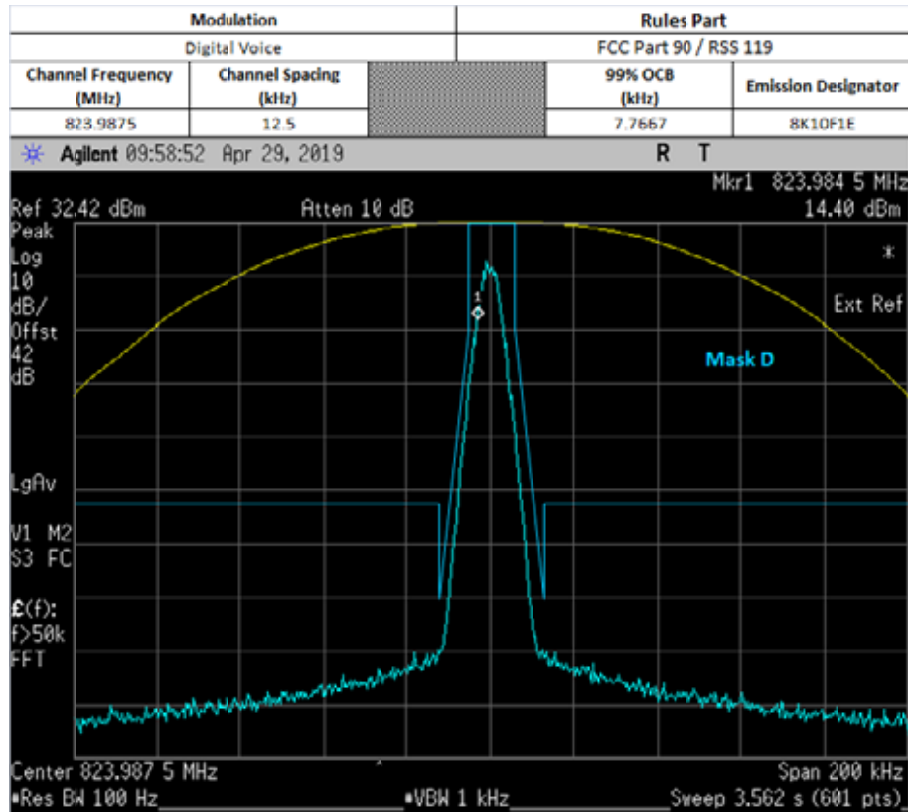

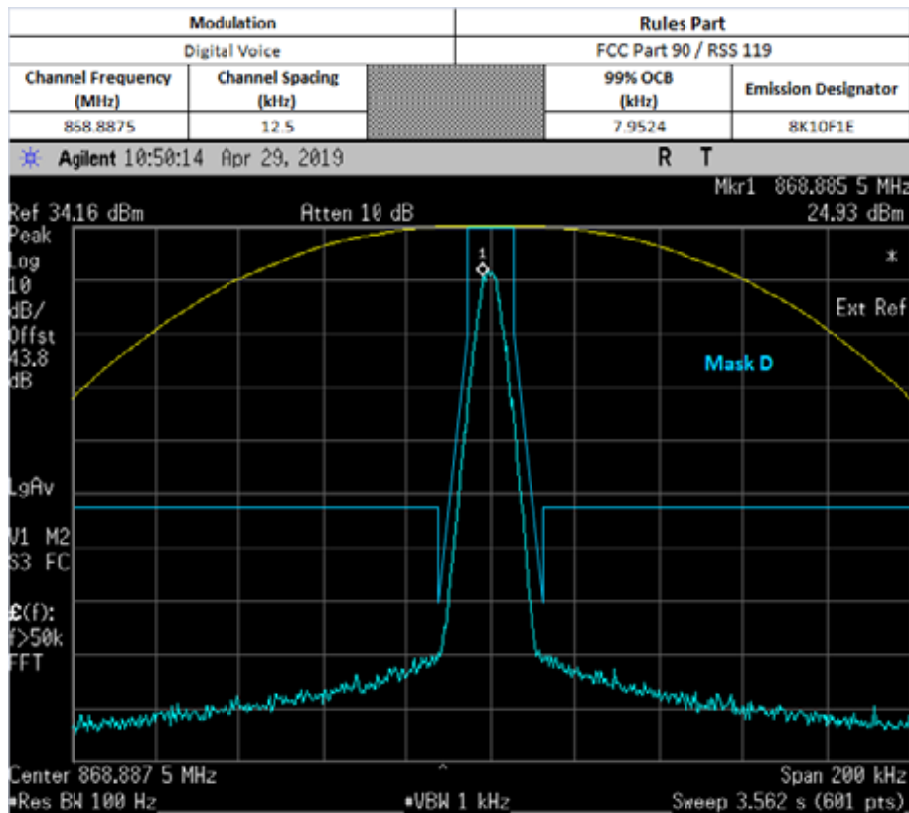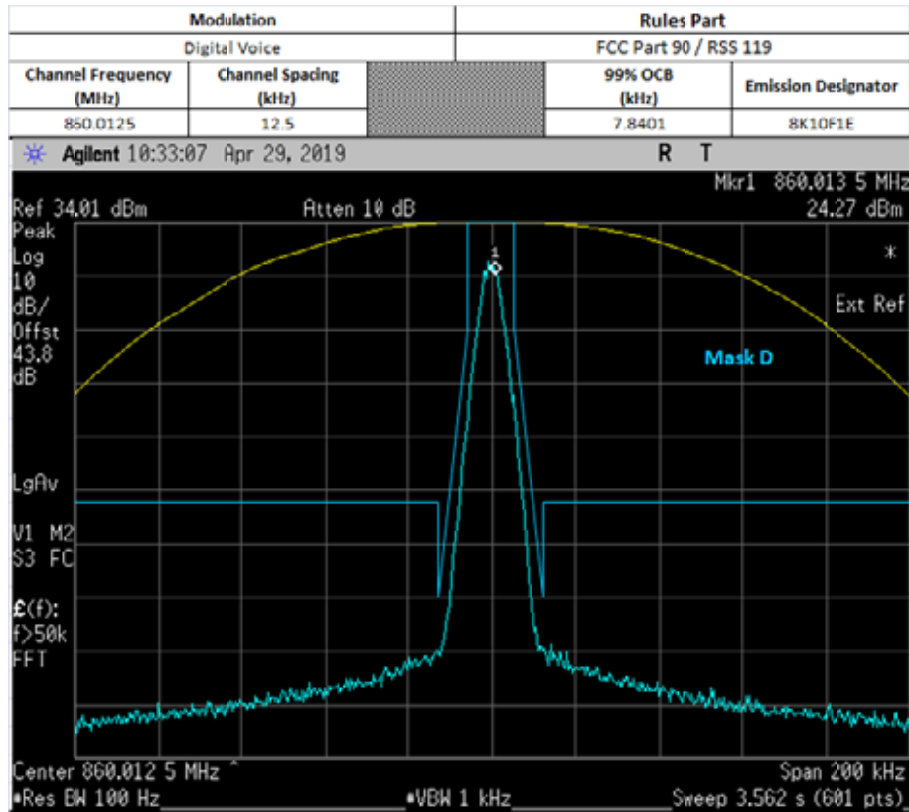


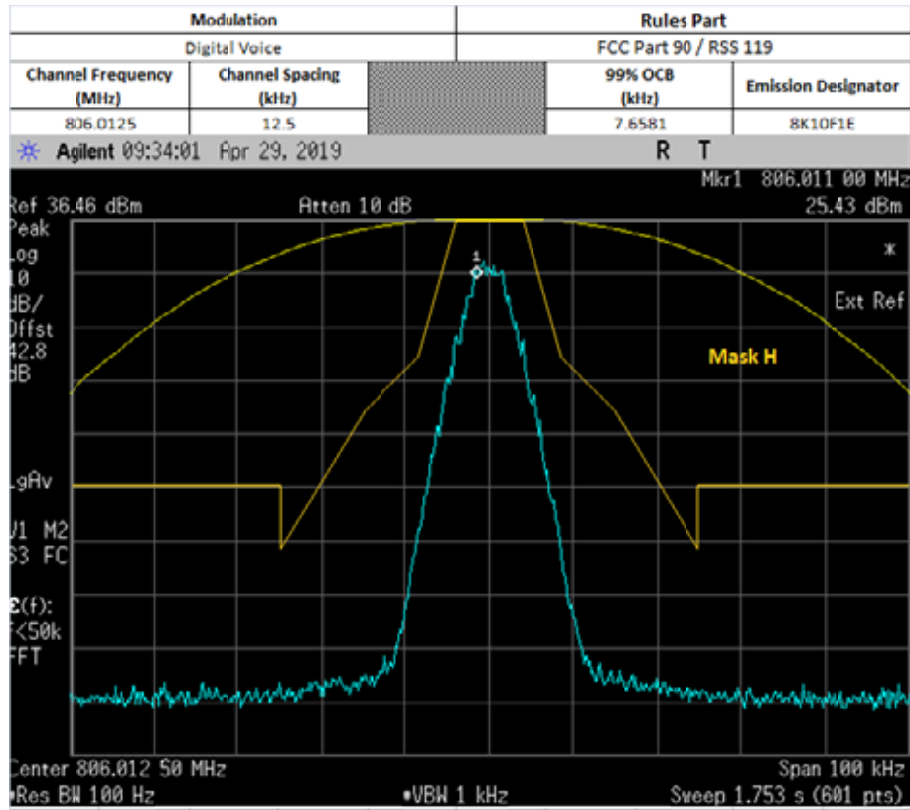


NOT FOR IC REVIEW

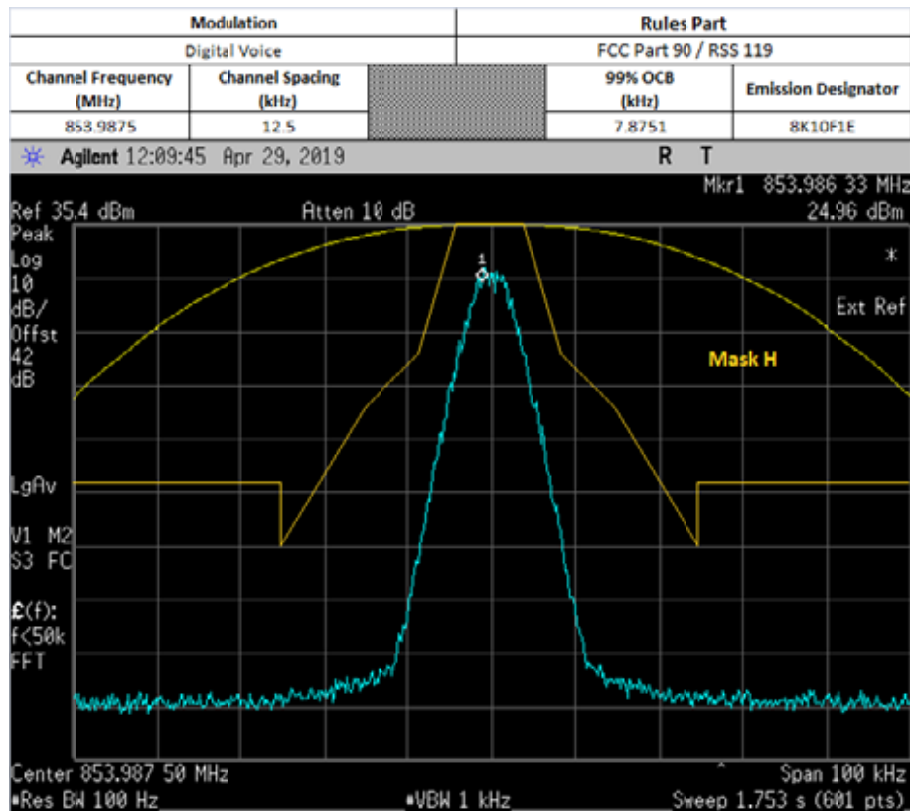



NOT FOR IC REVIEW


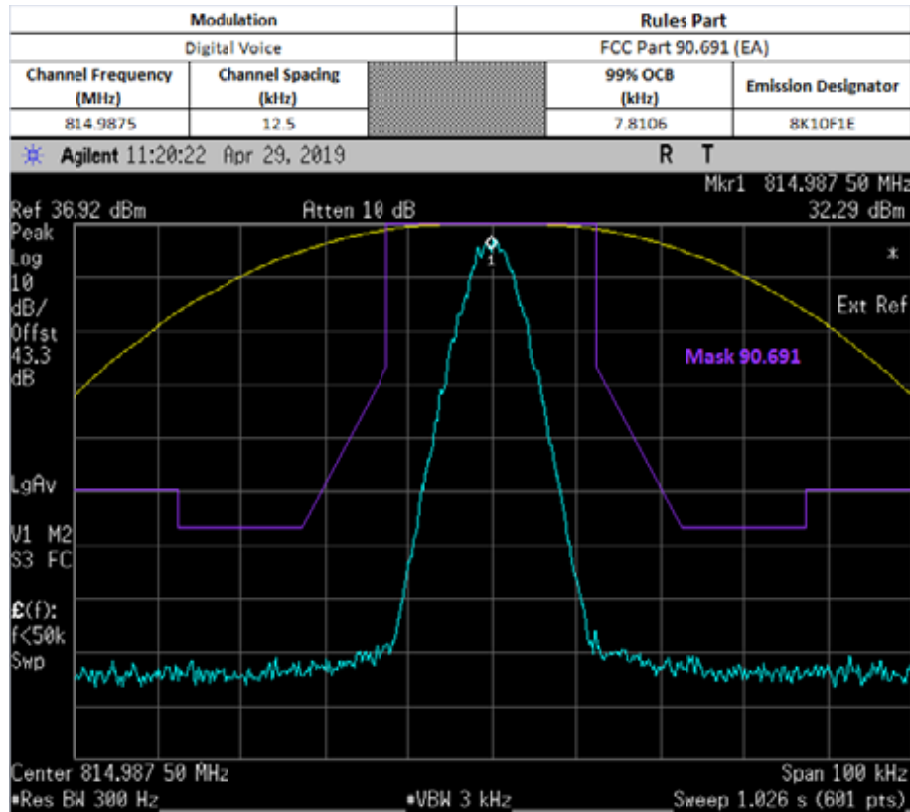




NOT FOR IC REVIEW

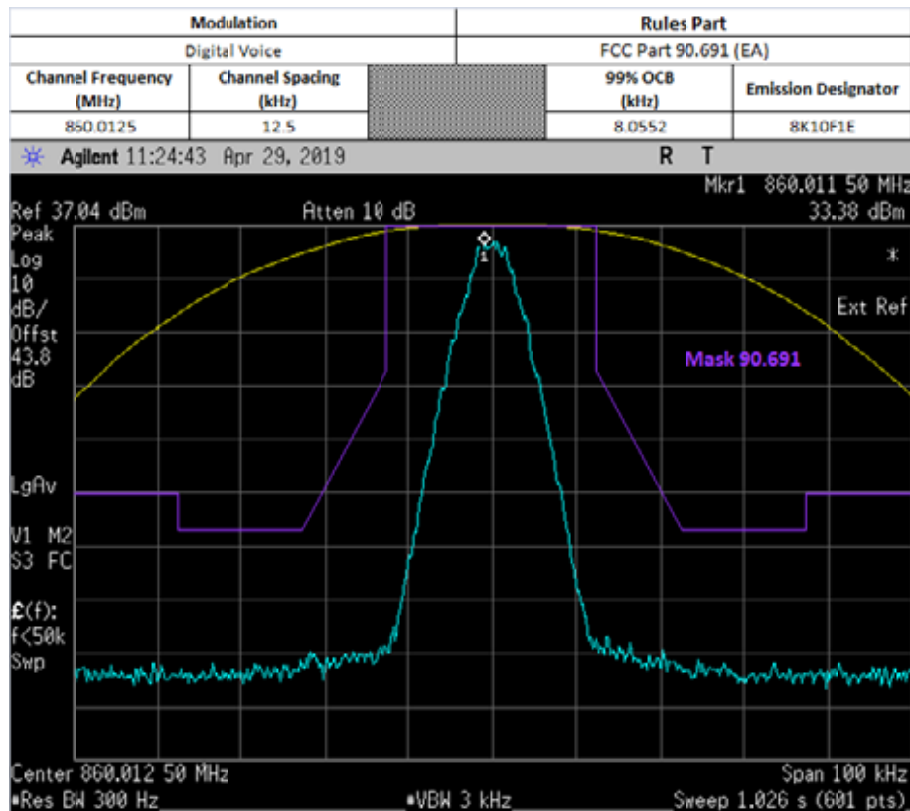


NOT FOR IC REVIEW

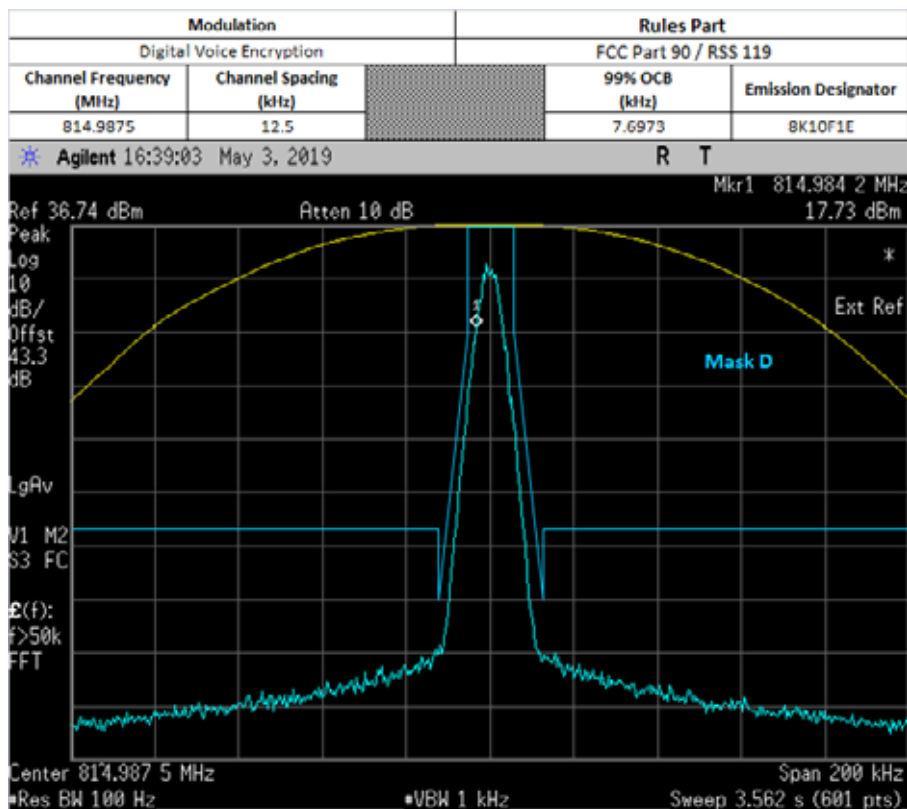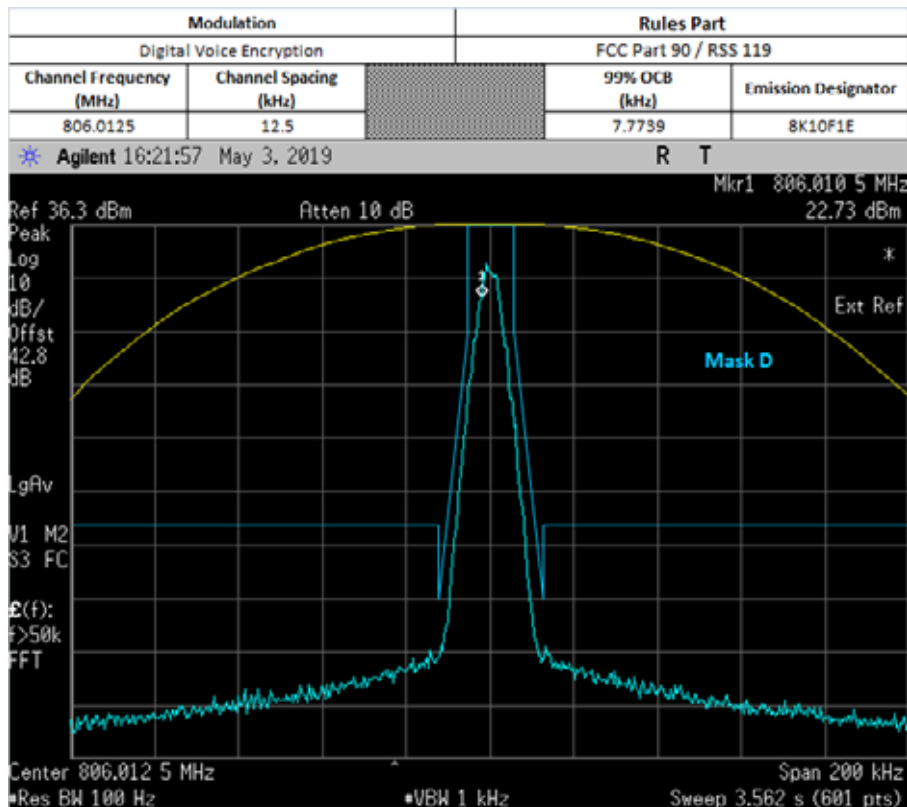


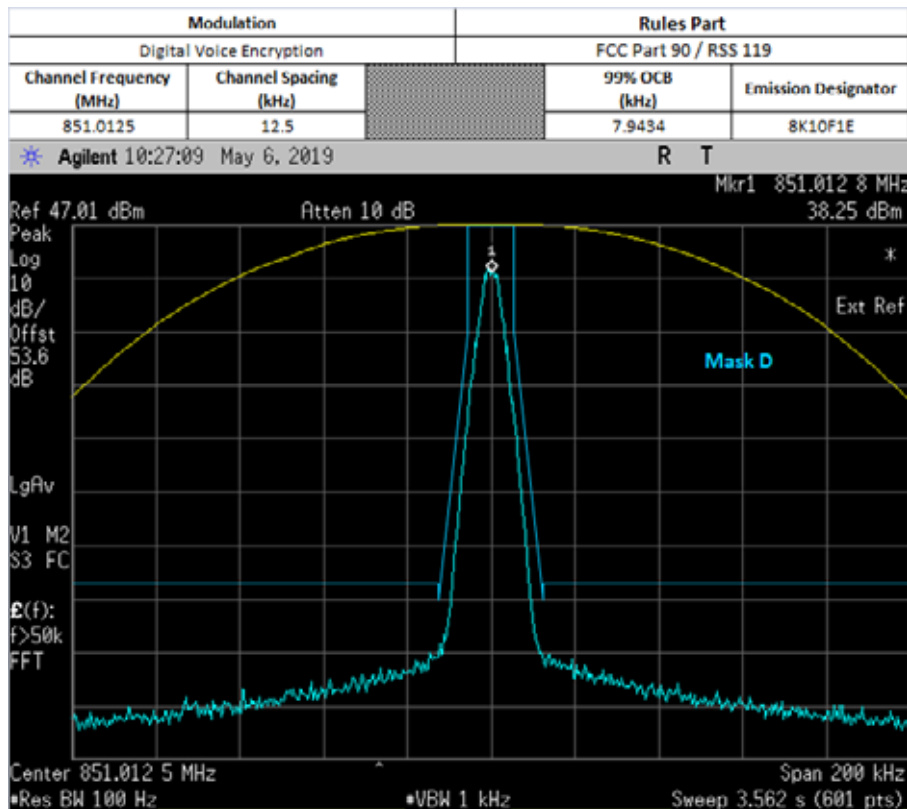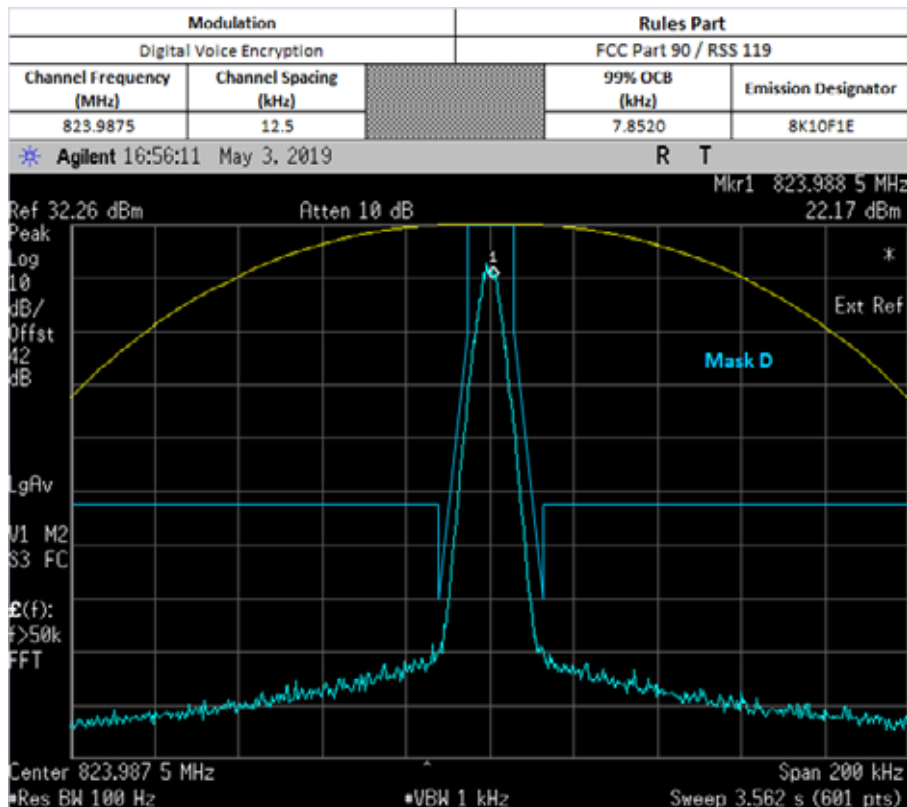

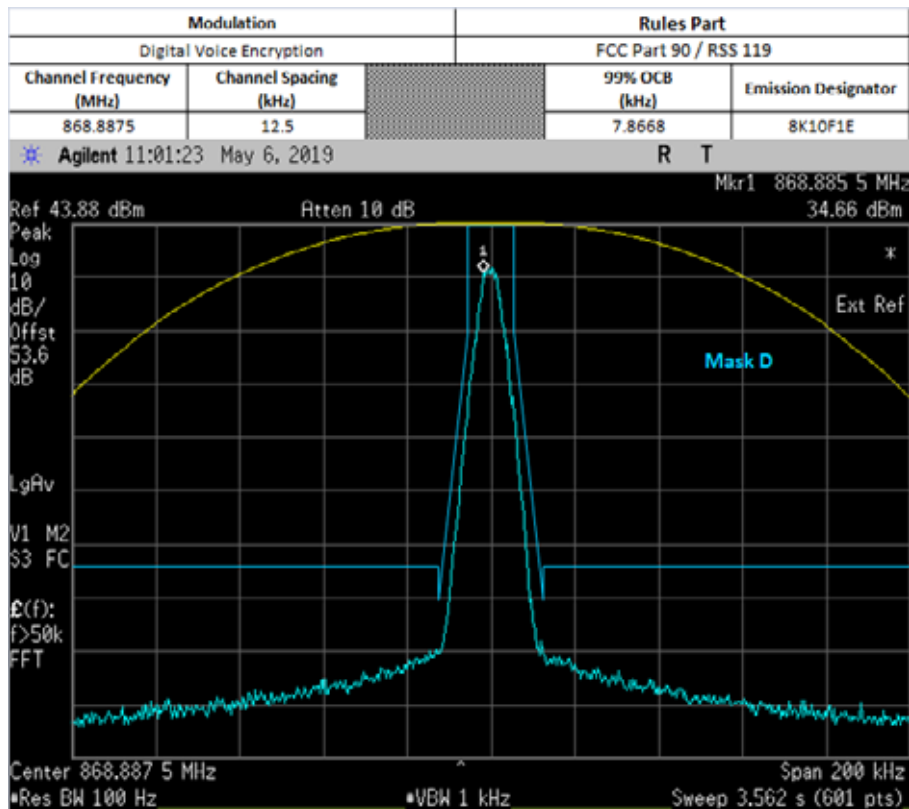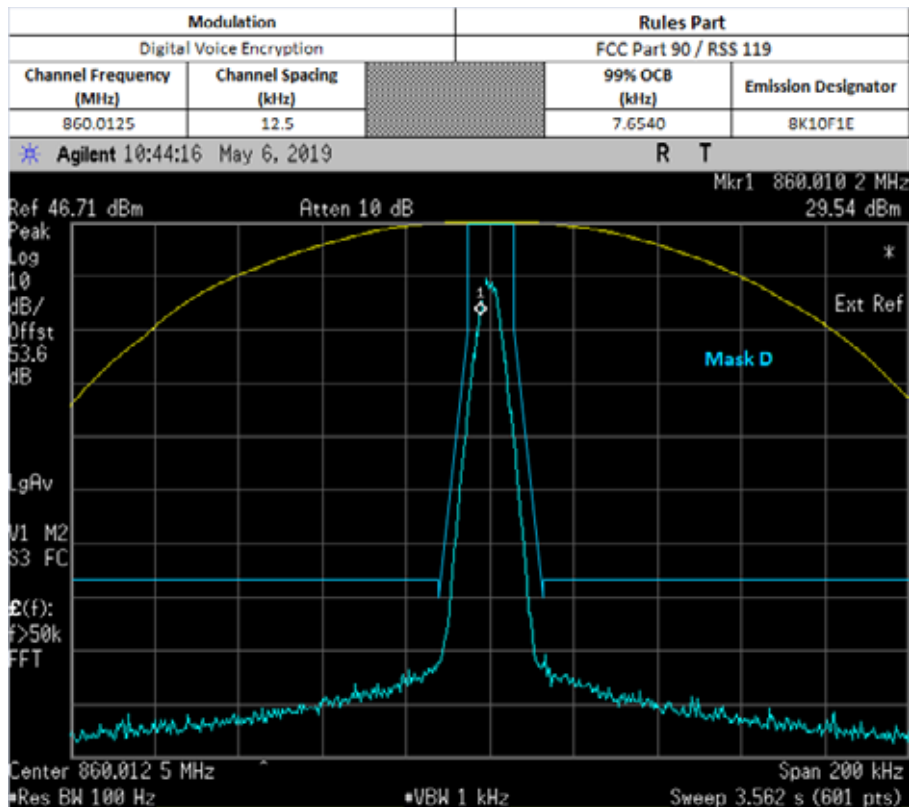


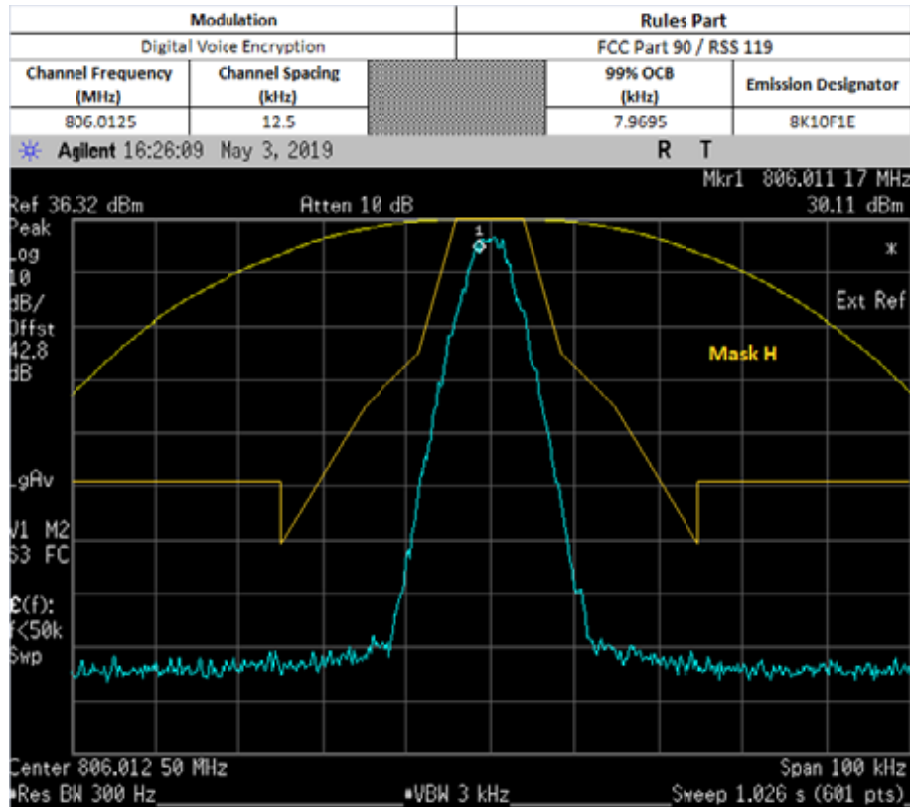


NOT FOR IC REVIEW

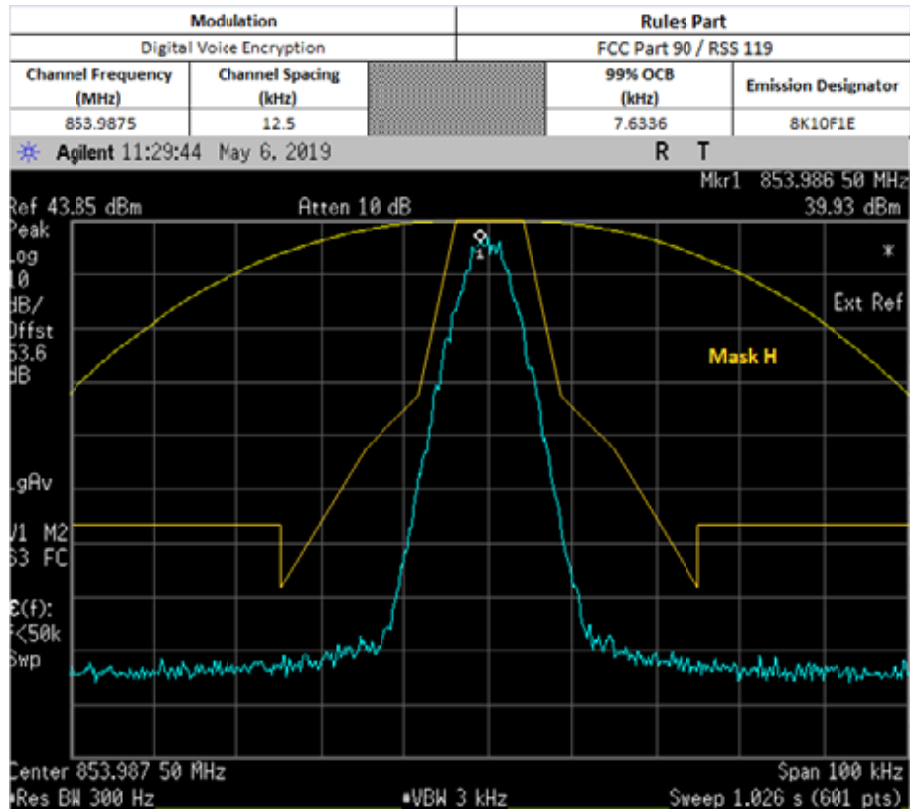



NOT FOR IC REVIEW


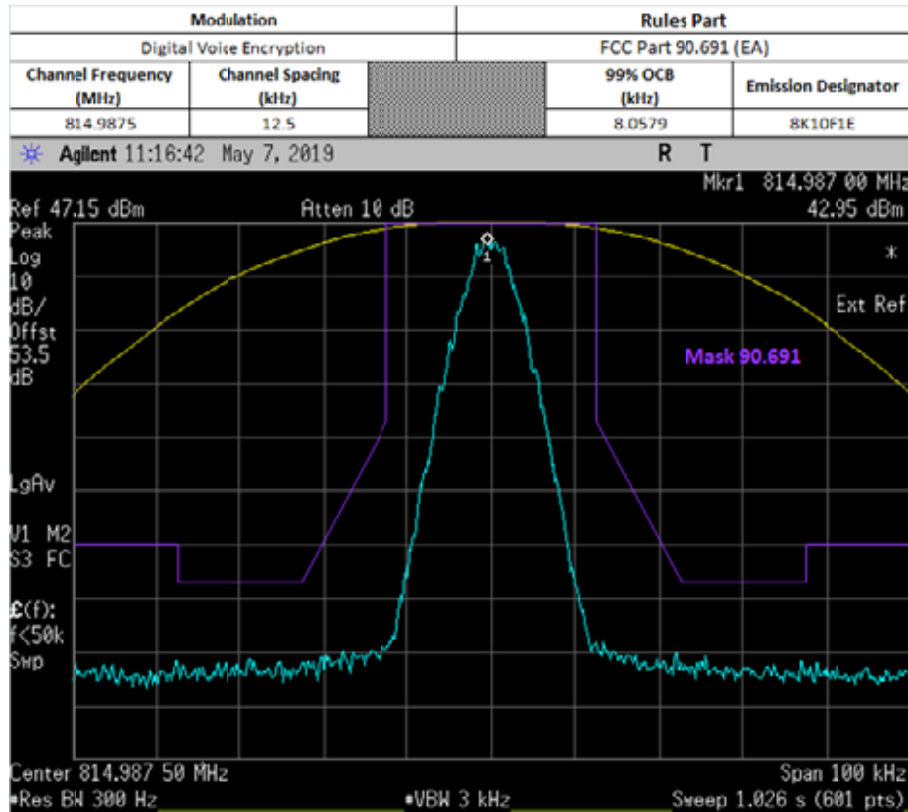




NOT FOR IC REVIEW

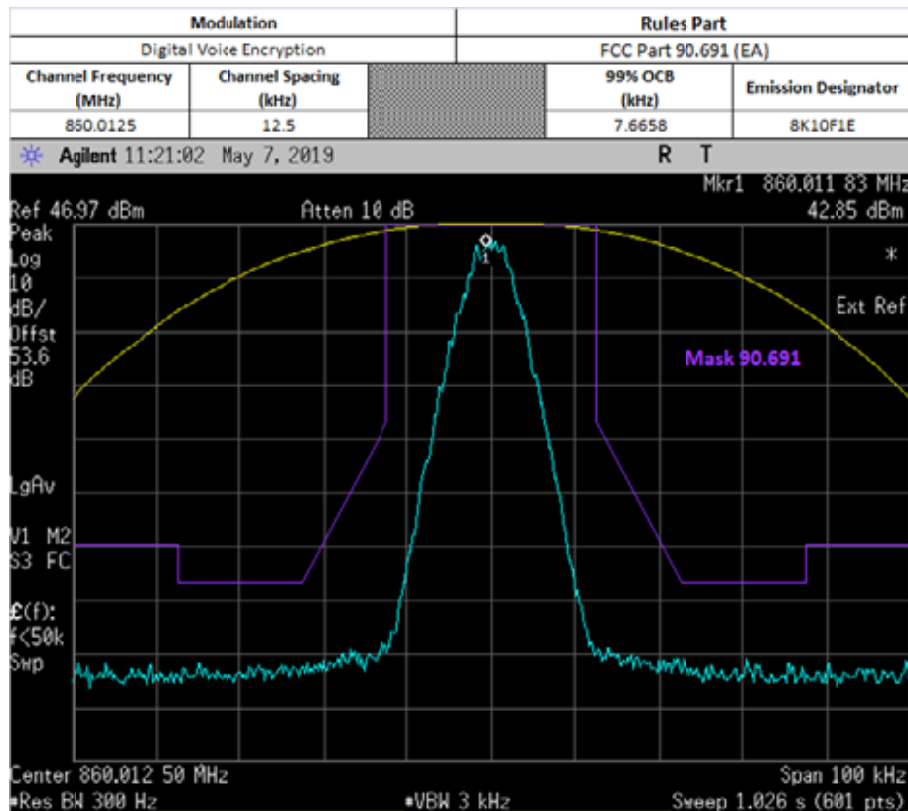


NOT FOR IC REVIEW

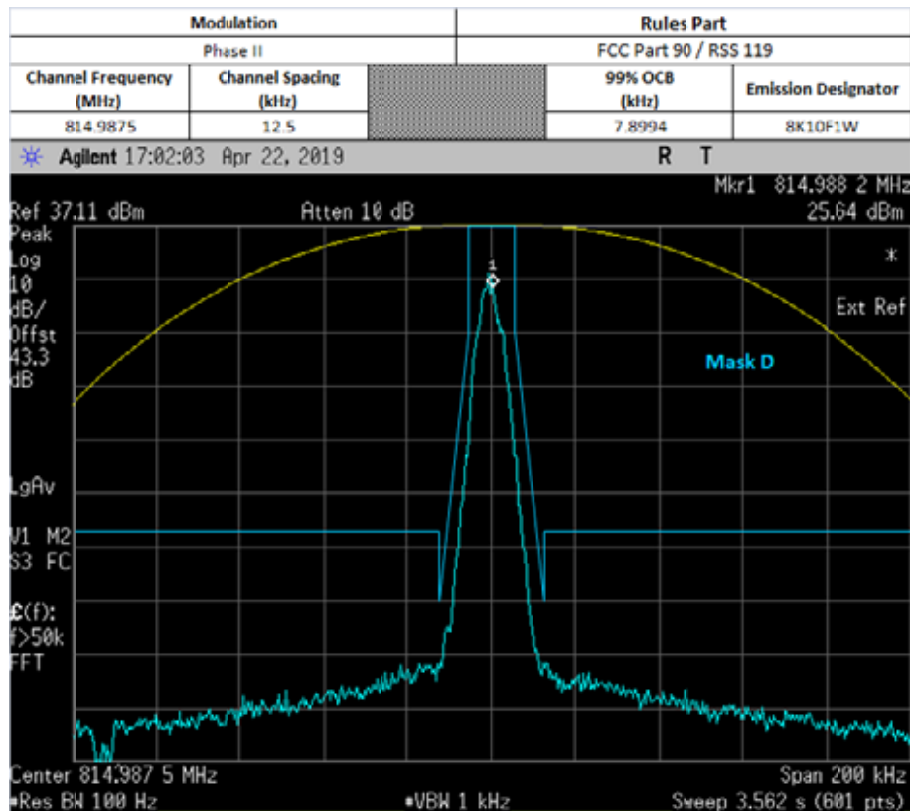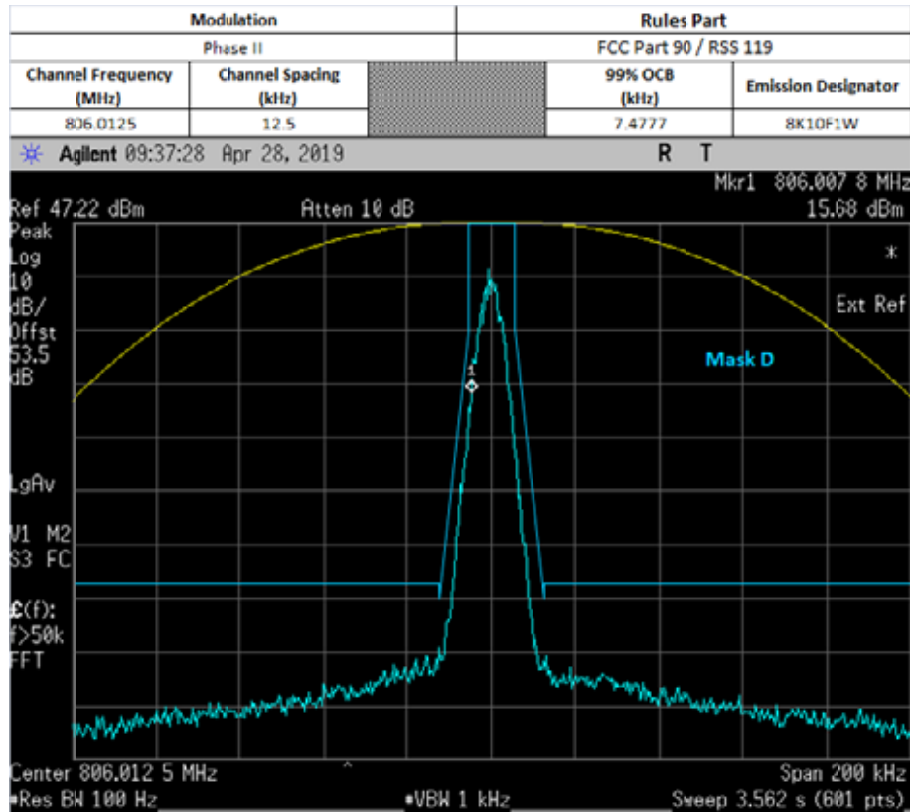


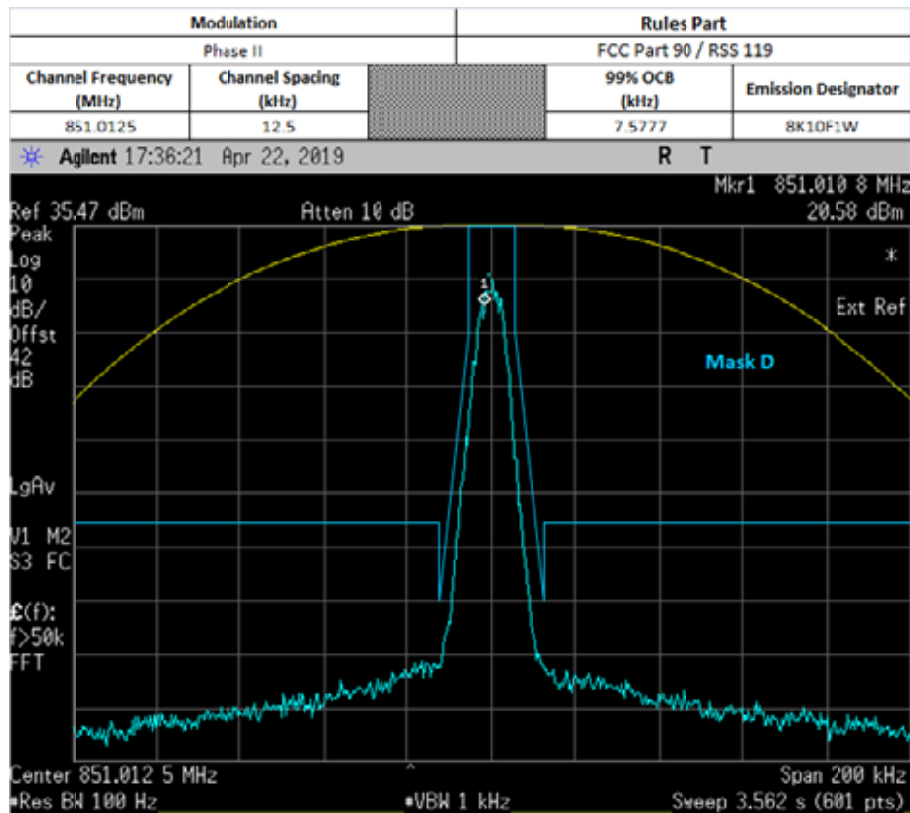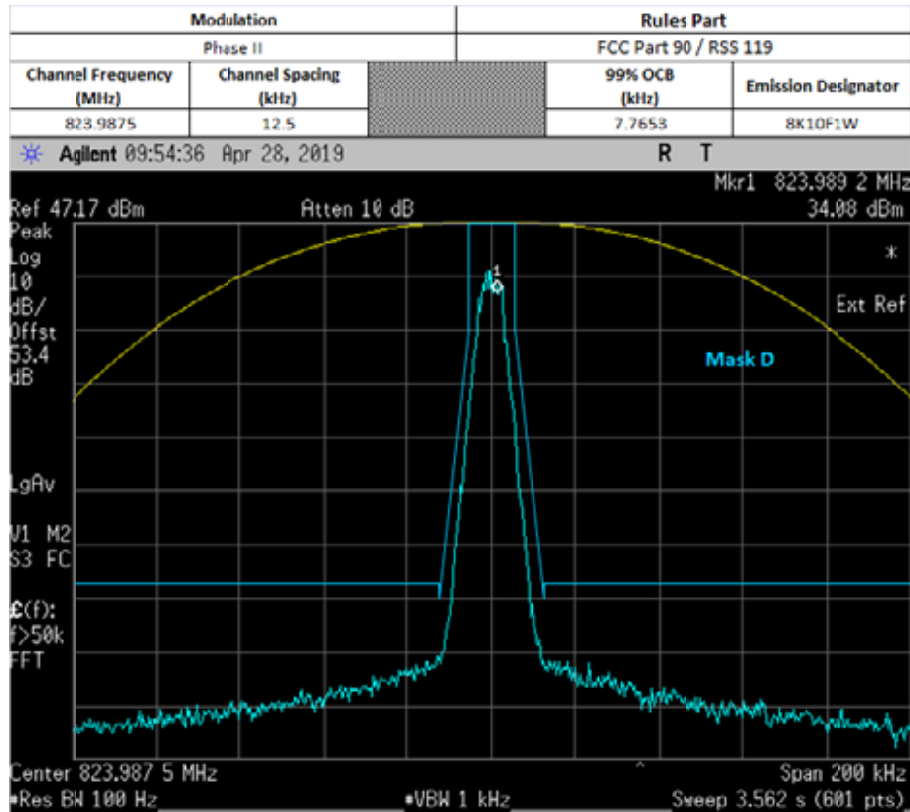

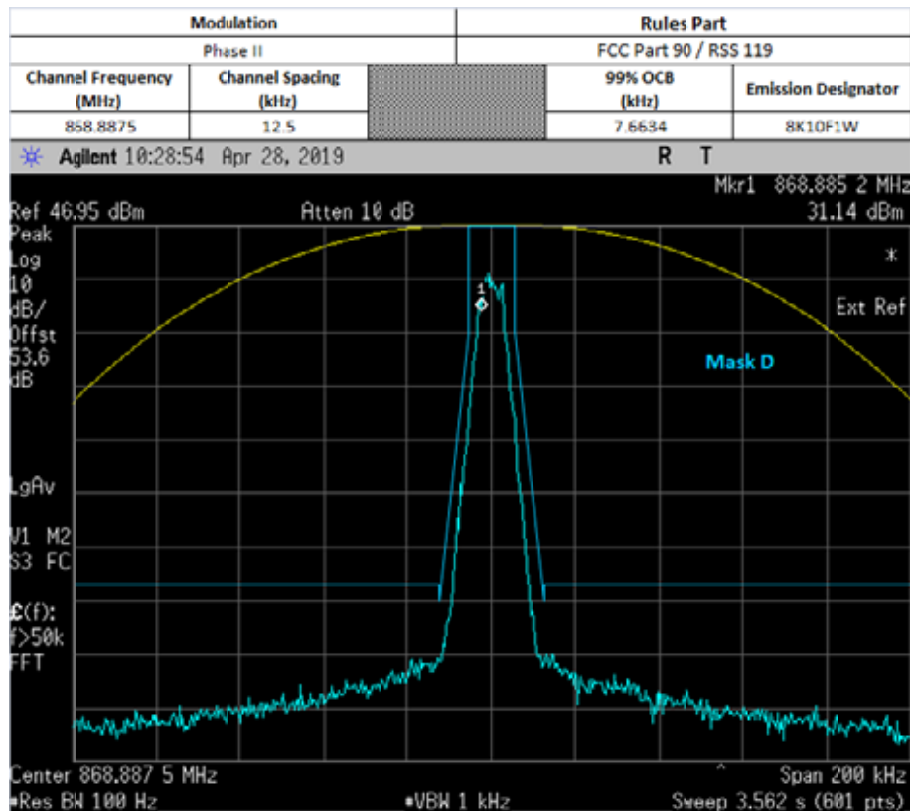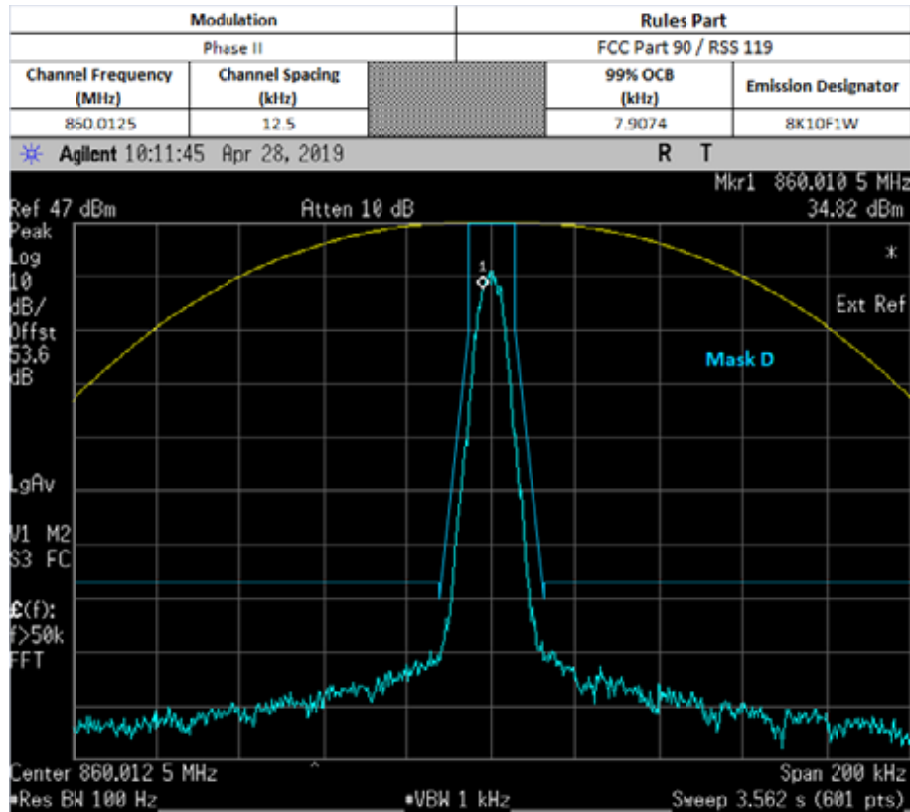

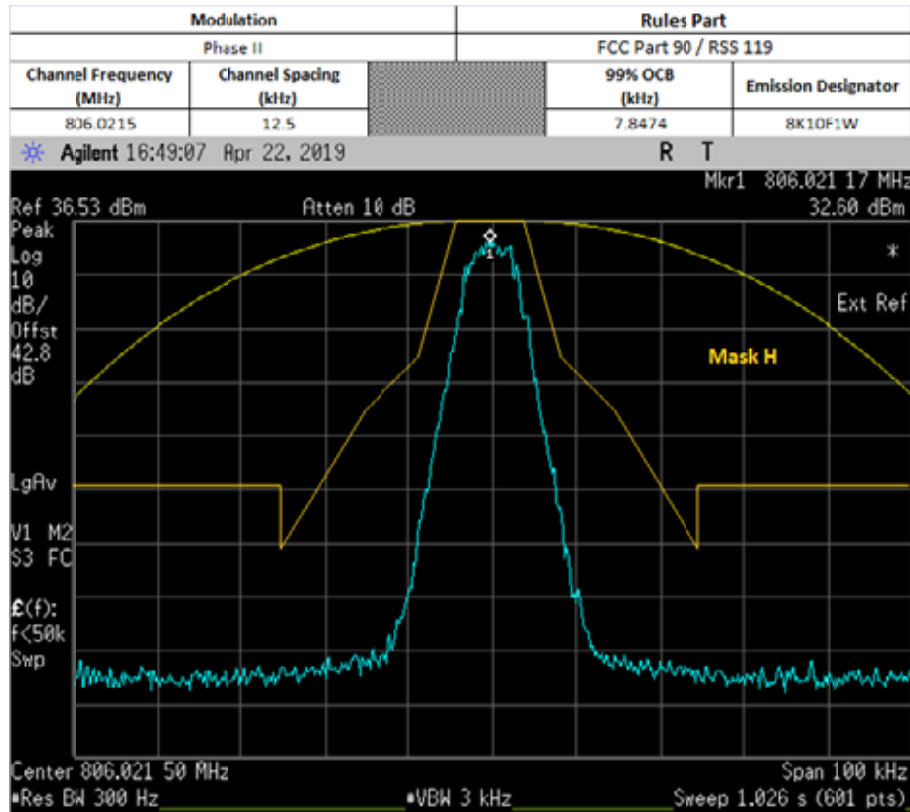

NOT FOR IC REVIEW

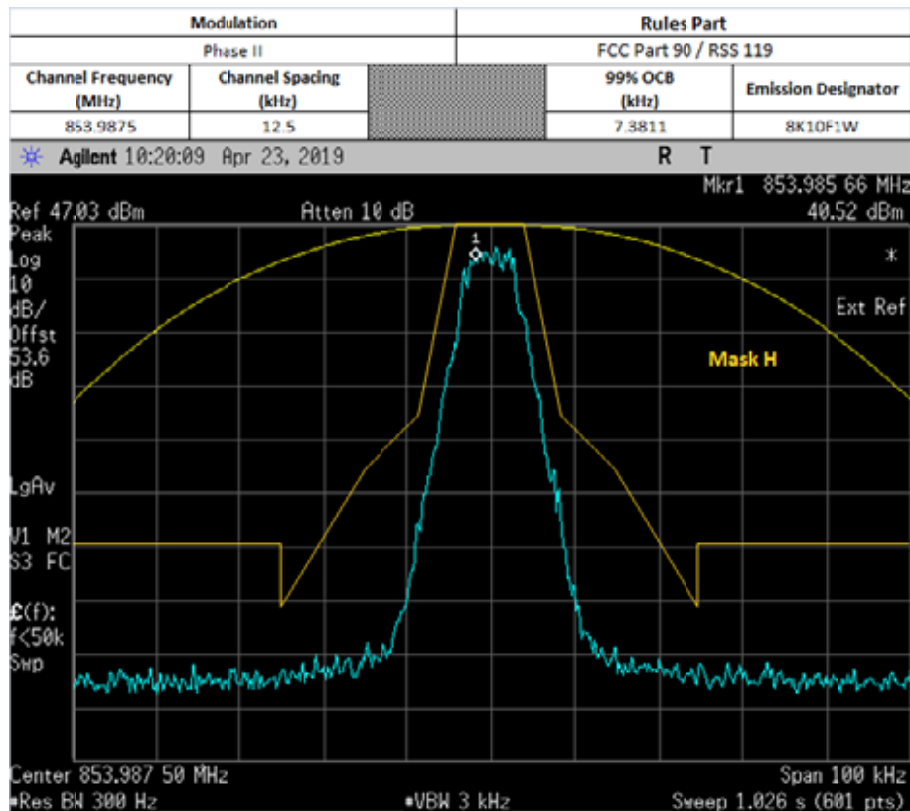

NOT FOR IC REVIEW