
 <p style="font-size: small;">CERTIFICATE 2518.08</p> <p style="font-size: x-small;">MS ISO/IEC 17025 TESTING SAMM NO. 0825</p>
---	---

<p>MOTOROLA PENANG ADV. COMM. LABORATORY Motorola Solutions Malaysia SDN BHD, Plot 2A, Medan Bayan Lepas, Mukim 12 S.W.D, 11900 Bayan Lepas, Penang, Malaysia.</p>	<p>FCC/ISED TEST REPORT Report Revision : Rev.C</p>
---	---

<p>Date/s Tested : 10-AUG-2020 - 15-AUG-2020 Report Issue Date : 13-OCT-2020 Manufacturer : Motorola Solutions Malaysia SDN BHD Manufacturer Address : Plot 2A, Medan Bayan Lepas, Mukim 12 SWD, 11900 Bayan Lepas, Penang, Malaysia Requestor : NUR AYUNI BINTI ALBAKRI Product Type : Mobile Product Version (PMN) : XPR 5550e Model Number (HVIN) : AAM28JQN9RA1AN (PMUD2567C) (IC MODEL: PMUD2567CBMNA) Frequency Band : 136-174MHz Max RF Output Power : 54 Watts Applicant Name : Motorola Solutions Inc Applicant Address : 8000 West Sunrise Boulevard, Fort Lauderdale, Florida 33322 ISED Registrations : MY0001 FCC Registrations : 461337 Firmware Version (FVIN) : D02.20.02.0111</p>			
<p>The equipment was tested accordance to the requirement listed below:</p> <table style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;"> <p>(LMR) FCC 47 CFR Part 2/ 22 / 74 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12</p> </td> <td style="width:40%; text-align: center; vertical-align: middle;"> <p>PASS</p> </td> </tr> </table>		<p>(LMR) FCC 47 CFR Part 2/ 22 / 74 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12</p>	<p>PASS</p>
<p>(LMR) FCC 47 CFR Part 2/ 22 / 74 / 90 ISED RSS- Gen Issue 5 / 119 Issue 12</p>	<p>PASS</p>		

This report shall not be reproduced without written approval from an officially designated representative of the Motorola Penang Adv. Comm. Laboratory. The results and statements contained in this report pertain only to the device(s) evaluated.

<p>Prepared By:</p> <div style="text-align: center; margin-top: 20px;">  <hr style="width: 200px; margin: 0 auto;"/> <p>Gan Boon Teong Test Personnel</p> </div>	<p>Approved Signatory:</p> <div style="text-align: center; margin-top: 20px;"> <hr style="width: 200px; margin: 0 auto;"/> <p>Vincent Foong Chuen Kit Responsible Engineer</p> </div>
---	---

Table of Contents

Report Revision History	3
1.0 General Information.....	4
2.0 Summary of Test Results.....	5
3.0 Measurement Uncertainty.....	6
4.0 Equipment List.....	7
5.0 Test Condition.....	10
5.1. Transmitter Test Conditions	10
6.0 Transmitter Test Parameters	11
6.1. RF Output Power	11
6.1.1. Test Setup.....	11
6.1.2. Test Result	11
6.2. Frequency Stability	12
6.2.1. Test Setup.....	12
6.2.2. Test Result	13
6.2.3. Test Limit.....	14
6.3. Audio Frequency Response	15
6.3.1. Test Setup.....	15
6.3.2. Test Result	16
6.3.3. Test Limit.....	17
6.4. Audio Low Pass Filter Response	18
6.4.1. Test Setup.....	18
6.4.2. Test Result	19
6.4.3. Test Limit.....	20
6.5. Modulation Limiting.....	21
6.5.1. Test Setup.....	21
6.5.2. Test Result	22
6.5.3. Test Limit.....	22
6.6. Occupied Bandwidth.....	23
6.6.1. Test Setup (Analog)	23
6.6.2. Test Result (Analog).....	24
6.6.3. Test Setup (Digital).....	30
6.6.4. Test Result (Digital).....	31
6.6.5. Test Limit.....	37
6.7. Band Edge Conducted Spurious Emission (Part 22)	38
6.7.1. Test Setup (Analog)	38
6.7.2. Test Result (Analog).....	39
6.7.3. Test Setup (Digital).....	40
6.7.4. Test Result (Digital).....	41
6.7.5. Test Limit.....	41
6.8. Transient Frequency Behavior.....	42
6.8.1. Test Setup.....	42
6.8.2. Test Result	43
6.8.3. Test Limit.....	45

6.9. Adjacent Channel Power..... 46

6.9.1. Test Setup (Analog) 46

6.9.2. Test Result 46

6.9.3. Test Setup (Digital)..... 47

6.9.4. Test Result 47

6.9.5. Test Limit..... 48

6.10. Conducted Spurious Emission 50

6.10.1. Test Setup..... 50

6.10.2. Test Result (Analog)..... 51

6.10.3. Test Result (Digital)..... 54

6.10.4. Test Limit..... 63

6.11. Radiated Spurious Emission 64

6.11.1. Test Setup..... 64

6.11.2. Test Result (Analog)..... 65

6.11.3. Test Result (Digital)..... 65

6.11.4. Test Limit..... 74

6.12. Effective Radiated Power (ERP) 82

6.12.1. Test Setup..... 82

6.12.2. Test Result 82

6.12.3. Test Limit..... 82

6.13. GNSS (EIRP for 1559 - 1610MHz)..... 83

6.13.1. Test Setup..... 83

6.13.1. Test Result 83

6.13.2. Test Limit..... 83

Report Revision History

Revision History	Description	Date	Originator
Rev. A	Initial Report	16-AUG-2020	Gan Boon Teong
Rev. B	Added FXE/FXD emission designators	3-DEC-2020	Vincent Foong
Rev. C	Remove part 80 / RSS-182	17-FEB-2021	Vincent Foong

1.0 General Information

EUT Description:

Technologies	Land Mobile Radio (LMR)
Modulation Type	Analog, 4FSK

The EUT contains following accessory devices and data cable:

Item	Brand	Model or P/N
POWER CABLE TO BATTERY, 6M (20 FT.), 20 AMP (1- 45W)	MOTOROLA	HKN4192B
IMPRES 4-WAY NAVIGATION KEYPAD MICROPHONE WITH ENHANCED AUDIO	MOTOROLA	RMN5127C

General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, the EUT is to comply with the requirements of the following standards:

ANSI C63.4-2014
ANSI C63.26-2015

Deviation from standard

Not applicable as no deviation from standard test method

Modifications to EUT

No modifications were done to the UUT.

2.0 Summary of Test Results

FCC General Rules Part (47CFR)	ISED General Rules Part	Test Item	Result	Remarks	Serial number tested
2.1046, 90.541, 22.565, 74.461, 74.534, 80.215	RSS-119	RF Power Output	Pass		511TWP7148
2.1055, 90.213	RSS-119	Frequency Stability	Pass		511TWP7148
2.1047, 74.463	RSS-119	Audio Frequency Response	Pass		511TWP7148
2.1047, 74.463	RSS-119	Audio Low Pass Filter Response	Pass		511TWP7148
2.1047, 74.463	RSS-119	Modulation limiting	Pass		511TWP7148
2.1049, 90.210, 80.211(f), 74.462(c), 22.359(b)	RSS-119	Occupied Bandwidth	Pass	16K0F3E-15.0543kHz 11K0F3E-9.9145kHz 7K60F1D/FXD-7.4171kHz 7K60F1E/FXE-7.5063kHz 7K60F1W-7.6040kHz	511TWP7148
22.359(a), 22.359(b)	RSS-119	Band Edge Conducted Spurious Emission	Pass		511TWP7148
90.214	RSS-119	Transient Frequency Behavior	Pass		511TWP7148
-	-	Adjacent Channel Power	NA		511TWP7148
Low end of the band, 22, 80, 90, 74H, 74D	RSS-119	Conducted Spurious Emissions	Pass	Highest emission: -26.55 dBm	511TWP7148
2.1053, 90.543	RSS-119	Radiated Spurious Emission	Pass	No spur detected (noise floor)	511TWP7151
-	-	GNSS (EIRP for 1559 – 1610MHz)	NA		
-	-	Effective Radiated Power (ERP)	NA		

NA → Not Applicable

3.0 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=1.96) (±)
AC Power Line Conducted Spurious Emission	150KHz ~ 30MHz	3.43 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	4.25 dB
	200MHz ~ 1000MHz	4.25 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.94 dB
	18GHz ~ 25GHz	4.94 dB
Conducted Spurious Emissions	9kHz ~ 12.75GHz	2.82 dB
Frequency Stability	9kHz ~ 12.75GHz	0.0085 ppm
Audio Frequency Response / Low Pass Filter Response	300Hz – 20kHz	4.09 %
Modulation Limiting	300Hz – 3kHz	1.15 %
Occupied Bandwidth	9kHz ~ 12.75GHz	2.82 dB
Band Edge Conducted Spurious Emission	9kHz ~ 12.75GHz	2.82 dB
Transient Frequency Behavior	9kHz ~ 12.75GHz	5.4 ms
Adjacent Channel Power	9kHz ~ 12.75GHz	2.82 dB

4.0 Equipment List

FCC Analog ATE#1: (SW version: 2.4.6 & FCC_Frequency Stability 1.0.3 rev..)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
CHAMBER	SH-641	92009188	06-Mar-20	06-Mar-21
DSA Dynamic Signal Analyzer	35670A	MY42507095	19-Jun-20	19-Jun-21
ANALYZER AUDIO	8903B	3729A17612	15-Nov-19	15-Nov-20
POWER METER	E4416A	GB41293747	19-Nov-18	19-Nov-20
POWER SENSOR	E9301B	MY41495629	16-Jun-20	16-Jun-21
POWER SUPPLY	6031A	3325A02771	13-Mar-20	13-Mar-21
SIGNAL GENERATOR	2042	119718/063	24-Jun-20	24-Jun-21
ANALYZER MODULATION	8901B	3122A03662	08-Jul-20	08-Jul-21
N to N RF Cable # 1	M17/128-RG400	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to BNC RF Cable # 7	RG 58	NA	NA	NA
N to SMA RF Cable # 1	RG 58	NA	NA	NA
N to SMA RF Cable # 2	RG 58	NA	NA	NA
N to SMA RF Cable # 3	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-34-LIM	NA	NA	NA

FCC Transient ATE #1: (SW version: FCC Transient ATE_R1.1.3)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR
ATTENUATOR / SWITCH DRIVER	11713A	2508A10141	CNR	CNR
POWER METER	E4416A	GB41293866	26-Feb-19	26-Feb-21
POWER SUPPLY	6032A	MY41002067	22-Feb-20	22-Feb-21
SIGNAL GENERATOR	8657A	3250A05137	19-Jun-20	19-Jun-21
STEP ATTENUATOR	8494G	MY42143006	12-Jun-20	12-Jun-21
STEP ATTENUATOR	8496G	MY42143012	13-Jun-20	13-Jun-21
OSCILLOSCOPE	MSO8104A	MY45002372	26-Jun-20	26-Jun-21
ANALYZER MODULATION	8901B	3438A05093	23-Jun-20	23-Jun-21
ANALYZER AUDIO	8903B	3011A12671	11-Mar-20	11-Mar-21
ANALYZER AUDIO	8903B	3011A08952	29-Jul-20	29-Jul-21
SPECTRUM ANALYZER	E4440A	MY46185415	10-Jan-20	10-Jan-22
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	M17/128-RG400	NA	NA	NA
N to N RF Cable # 3	M17/128-RG400	NA	NA	NA
N to N RF Cable # 4	M17/128-RG400	NA	NA	NA
N to N RF Cable # 5	M17/128-RG400	NA	NA	NA
N to N RF Cable # 6	M17/128-RG400	NA	NA	NA
N to N RF Cable # 7	M17/128-RG400	NA	NA	NA
N to N RF Cable # 8	M17/128-RG400	NA	NA	NA
N to N RF Cable # 9	M17/128-RG400	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
BNC to BNC RF Cable # 2	RG 58	NA	NA	NA
BNC to BNC RF Cable # 3	RG 58	NA	NA	NA
BNC to BNC RF Cable # 4	RG 58	NA	NA	NA
BNC to BNC RF Cable # 5	RG 58	NA	NA	NA
BNC to BNC RF Cable # 6	RG 58	NA	NA	NA
BNC to N RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 10dB	49-10-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA
SWITCH CONTROL UNIT	3488A	2719A36210	CNR	CNR

CONDUCTED SPUR EMISSION ATE # 1 (SW version: Conducted Spur ATE_rev 1.23.03)

Description	Model	Serial Number	Calibration Date	Calibration Due Date
SWITCH CONTROL UNIT	3488A	2719A32735	CNR	CNR
ANALYZER SPECTRUM	E4440A	MY46185415	10-Jan-20	10-Jan-22
POWER SUPPLY	6031A	3543A03489	05-Jun-20	05-Jun-21
HIGH PASS FILTER SWITCH BOX	-	CS001	2-Jul-20	2-Jul-21
N to N RF Cable # 1	SF126/11N/11N	NA	NA	NA
N to N RF Cable # 2	SF126/11N/11N	NA	NA	NA
BNC to BNC RF Cable # 1	RG 58	NA	NA	NA
Aeroflex Attenuator 30dB	49-30-43-LIM	NA	NA	NA
Aeroflex Attenuator 10dB	33-10-34-LIM	NA	NA	NA

EMC Chamber 1

DESCRIPTION	MODEL	SERIAL NUMBER	CALIBRATION DATE	CALIBRATION DUE DATE
DRG HORN FREQ.	SAS-571	720	21-Mar-19	21-Mar-21
DRG HORN FREQ.	SAS-571	1143	14-Feb-19	14-Feb-21
POWER SUPPLY (0-60V / 0-50A, 1000W)	6032A	2615A01178	21-May-20	21-May-21
SIGNAL GENERATOR	SMB 100A	181117	8-Nov-18	8-Nov-21
EMI TEST RECEIVER	ESW44	101750	24-Jul-19	24-Nov-20
EMI TEST RECEIVER	ESIB26	100017	19-Jul-19	19-Nov-20
5m SEMI-ANECHOIC CHAMBER	S800-HX	J2308	CNR	CNR
BILOG ANTENNA	CBL6112B	2964	23-Apr-19	23-Apr-21
BILOG ANTENNA	CBL6112B	2950	8-Jul-19	8-Jul-21
DATA LOGGER	SDL500	A.016776	4-Jun-20	4-Jun-21
SYSTEM CONTROLLER	SC104V	050806-1	CNR	CNR
TURNTABLE FLUSH MOUNT 2M	FM2011	NA	CNR	CNR
ANTENNA POSITIONING TOWER	TLT2	NA	CNR	CNR
BROAD-BAND HORN ANTENNA	BBHA9170	BBHA9170255	27-Jan-20	27-Jan-21
18 - 40GHz PREAMPLIFIER	MITEQ Hi GAIN SUCOFLEX	001	CNR	CNR
PREAMPLIFIER	PAM-0118	269	24-May-19	24-May-22
LOOP ANTENNA	6502	00203479	21-Jan-20	21-Jan-21
TEST SOFTWARE	EMC FCC IC BLUETOOTH RE TEST			
VERSION	EMC FCC RE v1.6.2			

5.0 Test Condition

5.1. Transmitter Test Conditions


Test Item, (Channel Spacing)	Power (W)	Modulation	Test Frequency (MHz)	Tested By	Environmental conditions
RF Output Power	Low & Max	Analog	138.0125, 158.55, 161.7, 173.3875	Gan Boon Teong	23.4°C, 50%RH
Frequency Stability	Max	Analog	158.550	Gan Boon Teong	25.1°C, 54.3%RH, 60.3°C, 50%RH, -30.1°C, 51.2%RH
Audio Frequency Response (12.5kHz / 25kHz)	Max	Analog	158.55	Gan Boon Teong	23.4°C, 50%RH
Audio Low Pass Filter Response (12.5kHz / 25kHz)	Max	Analog	158.55	Gan Boon Teong	23.4°C, 50%RH
Modulation limiting (12.5kHz / 25kHz)	Max	Analog	158.55	Gan Boon Teong	23.4°C, 50%RH
Occupied Bandwidth (12.5kHz / 20kHz / 25kHz)	Max	Analog, 4FSK	138.0125, 158.55, 161.7, 173.3875, 173.9875	Gan Boon Teong	23.4°C, 50%RH
Band Edge Conducted Spurious Emissions (Part 22) (12.5kHz / 20kHz / 25kHz)	Low / Max	Analog, 4FSK	157.77, 158.67	Gan Boon Teong	23.4°C, 50%RH
Transient Frequency Behavior (UHF & VHF Band) (12.5kHz / 25kHz)	Max	Analog	158.55	Gan Boon Teong	23.4°C, 50%RH
Adjacent Channel Power (700MHz Band) (12.5kHz / 25kHz)	Max	NA	NA	Gan Boon Teong	
Conducted Spurious Emissions- (12.5kHz / 25kHz)	Low / Max	Analog, 4FSK	138.0125, 158.55, 161.7, 173.3875, 173.9875	Gan Boon Teong	23.4°C, 50%RH
Radiated Spurious Emission (12.5kHz / 25kHz)	Low / Max	Analog, C4FM, Phase II	138.0125, 158.55, 161.7, 173.3875, 173.9875	Qawiman&Fendi	22.5 °C, 64%RH
GNSS (EIRP for 1559 - 1610MHz) (12.5kHz / 25kHz)	Max	NA	NA	NA	
Effective Radiated Power (ERP) (12.5kHz / 25kHz)	Max	NA	NA	NA	

NA → Not Applicable

6.0 Transmitter Test Parameters

6.1. RF Output Power

6.1.1. Test Setup

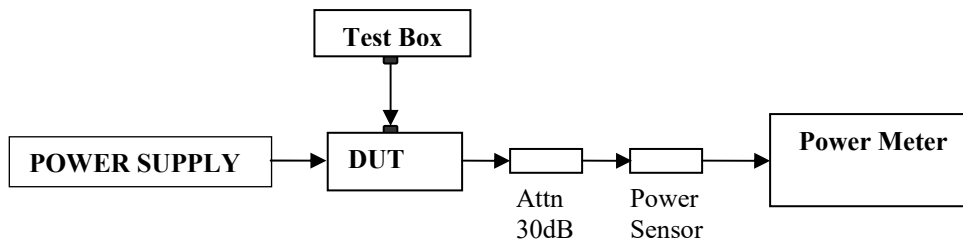


- 1) The DUT transmitter connected to Power Meter using the 30 dB attenuator and power sensor with above setup.
- 2) Path loss for the measurement included.
- 3) All the measurement was done at low, mid, high frequency for each band.
- 4) Record the power into the test report.

6.1.2. Test Result

Temperature	25°C				Remark
Voltage (V)	13.6V				
Frequency (MHz)	Low Power (W)	Current (A)	Max Power (W)	Current (A)	
138.01250	24.38	5.52	52.34	8.07	Not for FCC review
158.55000	24.89	5.76	51.81	8.22	
161.70000	25.15	5.67	52.40	8.79	
173.38750	24.96	5.88	52.76	8.43	

6.2. Frequency Stability

6.2.1. Test Setup

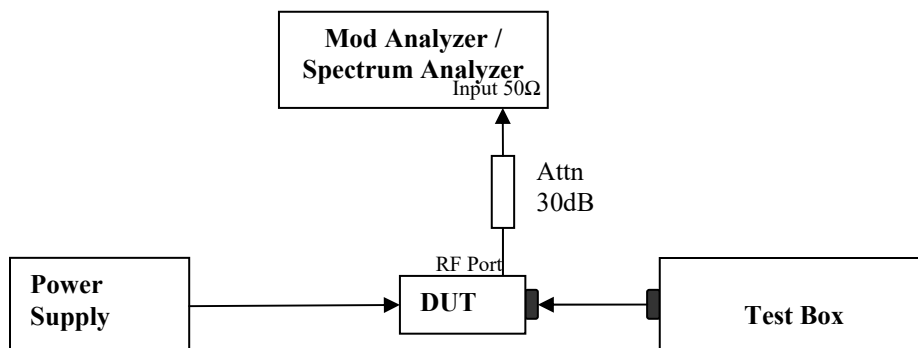


- 1) The DUT transmitter output port was connected to Modulation / Spectrum Analyzer.
- 2) Path loss for the measurement included.
- 3) Transmit the DUT and record the freq in MCF_{MHz} .
- 4) Test in 2 conditions:
 - Temperature: The frequency of the transmitter was measured from $-30^{\circ}C$ to $50^{\circ}C$.
 - Supply Voltage:
 - Mobile: The frequency of the transmitter was measured from 85% to 115% of the nominal operating input voltage.
 - Portable: The frequency of the transmitter was measured from nominal $\pm x\%$ as specified by the manufacturer
- 5) Calculate the ppm frequency error by the following:


$$ppm\ error = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 10^6$$

Where: MCF_{MHz} is the Measured Carrier Frequency in MHz
 ACF_{MHz} is the Assigned Carrier Frequency in MHz

6.2.2. Test Result

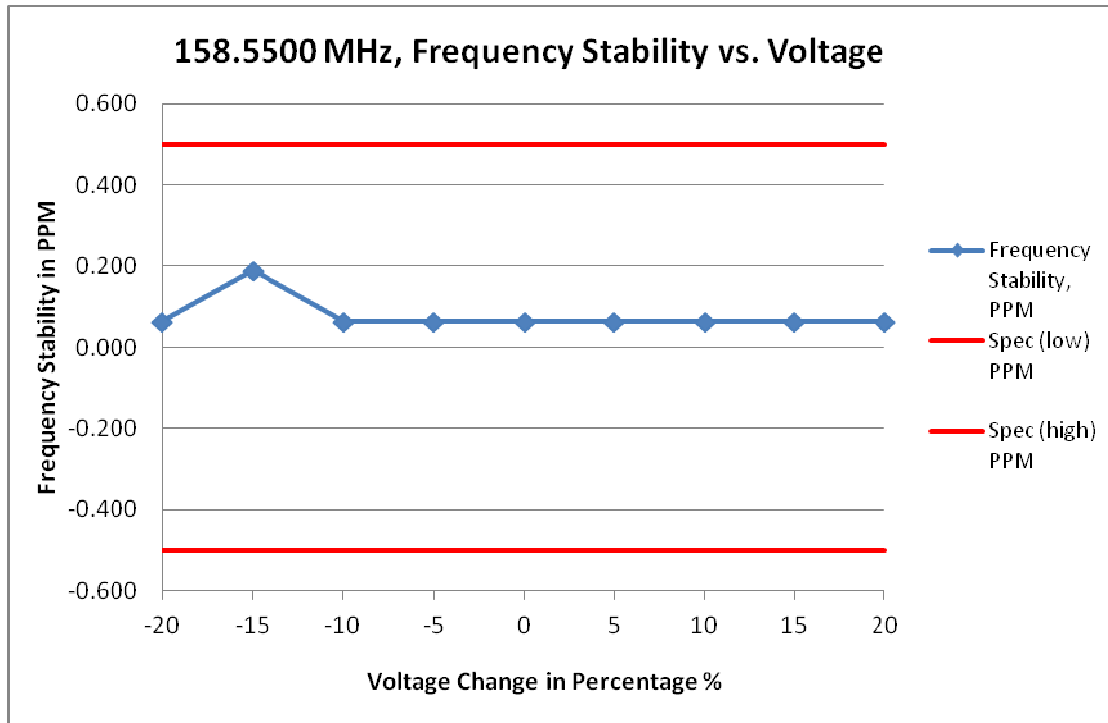

Frequency / Channel Spacing	158.5500 MHz / 12.5 kHz				
Temperature, °C	25				
Voltage %	Voltage, V	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-20	10.880	158.550010	0.063	-0.500	0.500
-15	11.560	158.550010	0.063	-0.500	0.500
-10	12.240	158.550030	0.189	-0.500	0.500
-5	12.920	158.550010	0.063	-0.500	0.500
0	13.600	158.550010	0.063	-0.500	0.500
5	14.280	158.550010	0.063	-0.500	0.500
10	14.960	158.550010	0.063	-0.500	0.500
15	15.640	158.550010	0.063	-0.500	0.500
20	16.320	158.550010	0.063	-0.500	0.500

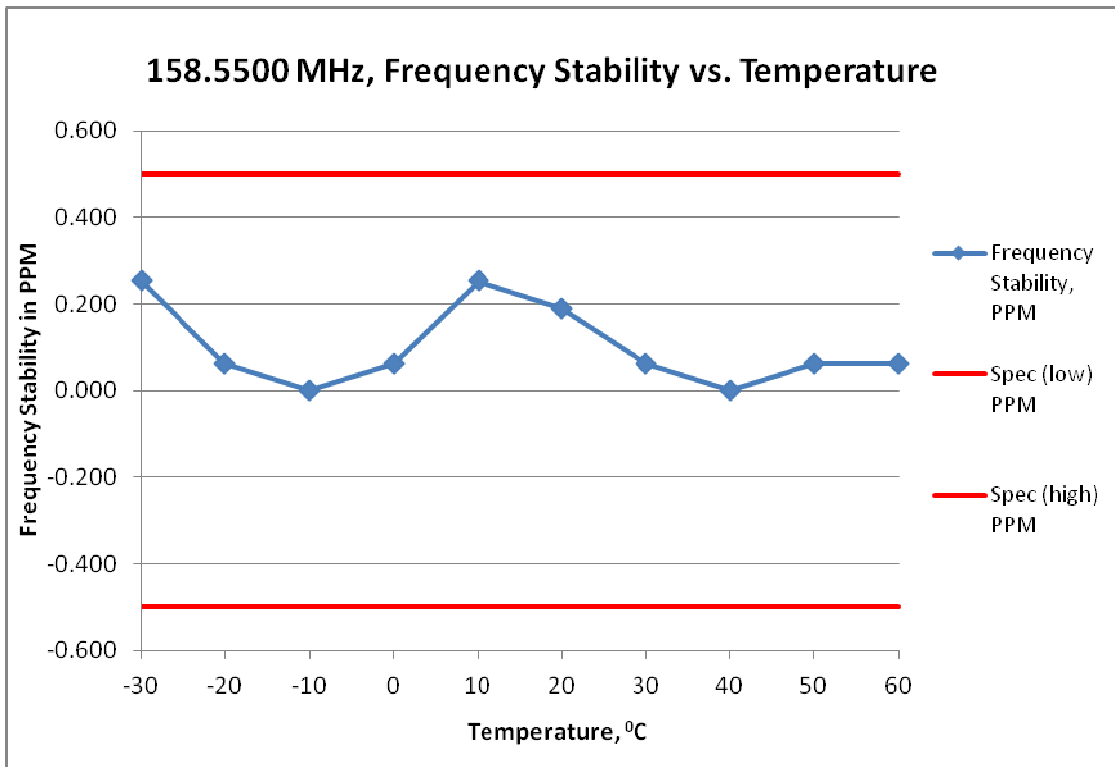


Frequency / Channel Spacing		158.5500 MHz / 12.5 kHz		
Voltage, V		13.6		
Temperature, °C	Frequency, MHz	Frequency Stability, PPM	Spec (low) PPM	Spec (high) PPM
-30	158.550040	0.252	-0.500	0.500
-20	158.550010	0.063	-0.500	0.500
-10	158.550000	0.000	-0.500	0.500
0	158.550010	0.063	-0.500	0.500
10	158.550040	0.252	-0.500	0.500
20	158.550030	0.189	-0.500	0.500
30	158.550010	0.063	-0.500	0.500
40	158.550000	0.000	-0.500	0.500
50	158.550010	0.063	-0.500	0.500
60	158.550010	0.063	-0.500	0.500

6.2.3. Test Limit

As per manufacturer declared spec +/- 0.5ppm



6.3. Audio Frequency Response

6.3.1. Test Setup

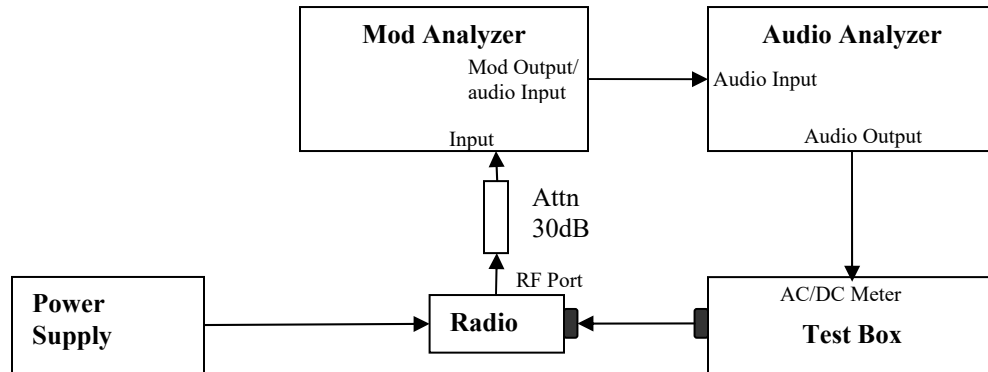


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz and 50 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 20% of the Full rated system deviation.
- 5) On audio analyzer, set the rated level as reference to zero.
- 6) Vary the audio frequency from 300 Hz to 3 kHz. Record the change in dB on the audio analyzer.

6.3.2. Test Result

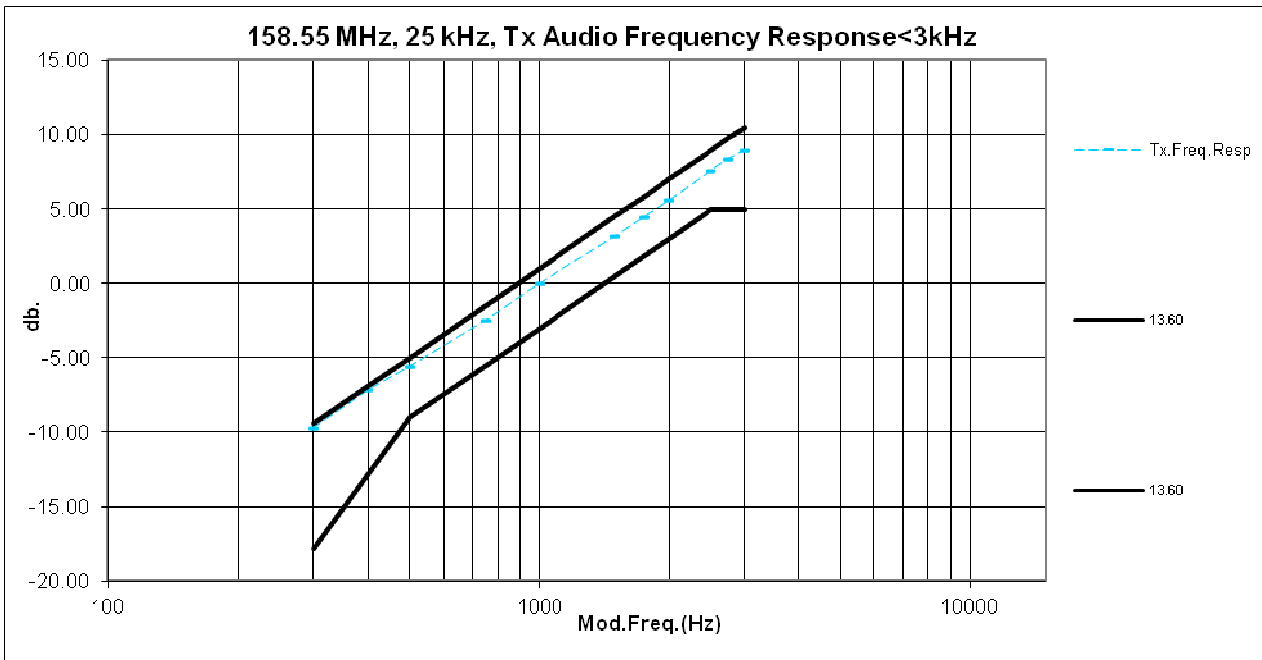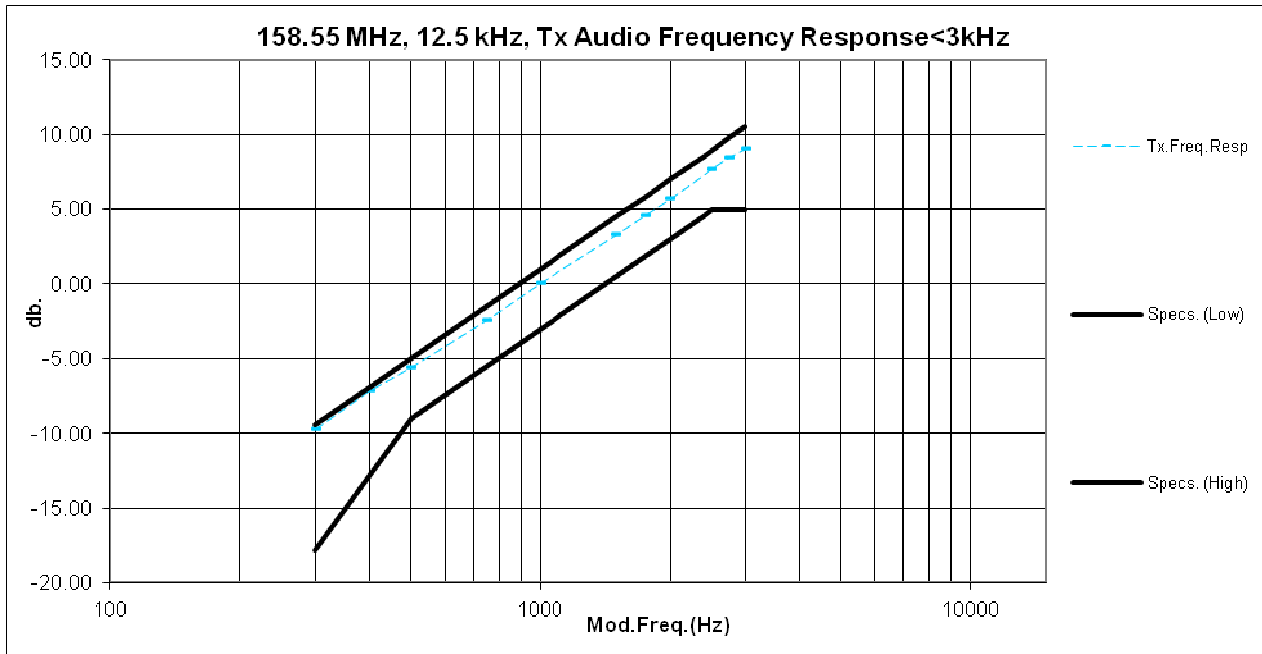

6.3.3. Test Limit

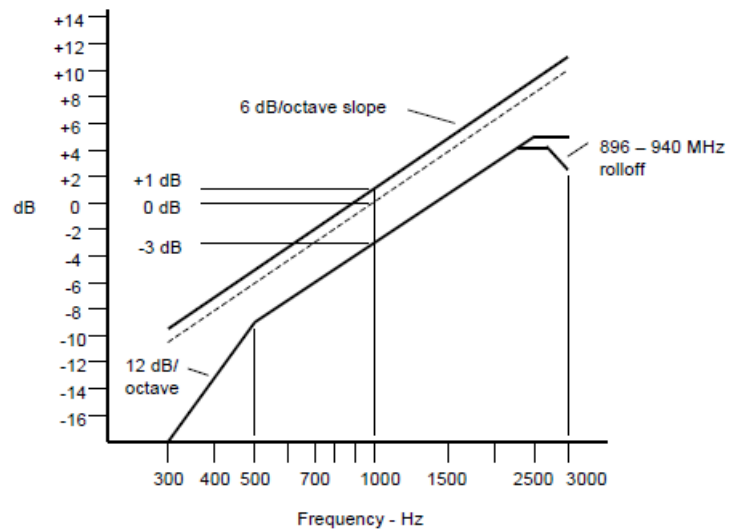


Note:

- o There are additional 6 dB per octave attenuation is allowed from 2.5KHz to 3KHz in equipment 25MHz to 869MHz radio.
- o Additional 6 dB per octave attenuation is allowed from 2.3KHz to 2.7KHz & additional 12 dB per octave attenuation is allowed from 2.7KHz to 3KHz in equipment 896MHz to 940MHz radio.



6.4. Audio Low Pass Filter Response

6.4.1. Test Setup

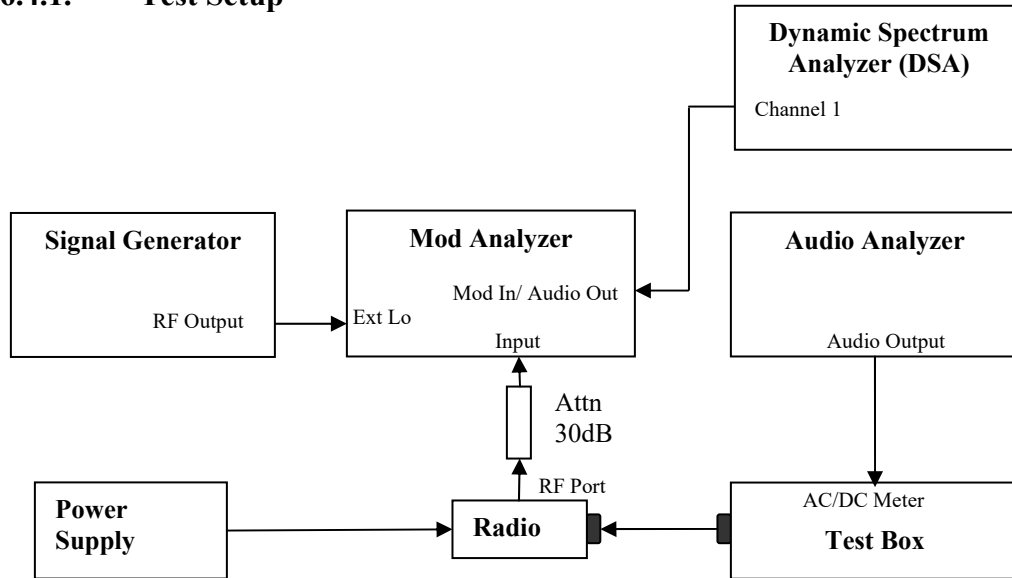


- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Press 23.1SPCL on modulation analyzer to enable the external LO from Sigen.
- 4) Set the Sigen frequency to $F_c + 1.5$ MHz, RF output level to 0dBm without modulation.
- 5) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 6) Up the amplitude by 20dB.
- 7) On DSA, get the reference point to 0dB.
- 8) Vary the frequency on audio analyzer from 3 kHz to 20 kHz, record the audio tone from DSA.

6.4.2. Test Result

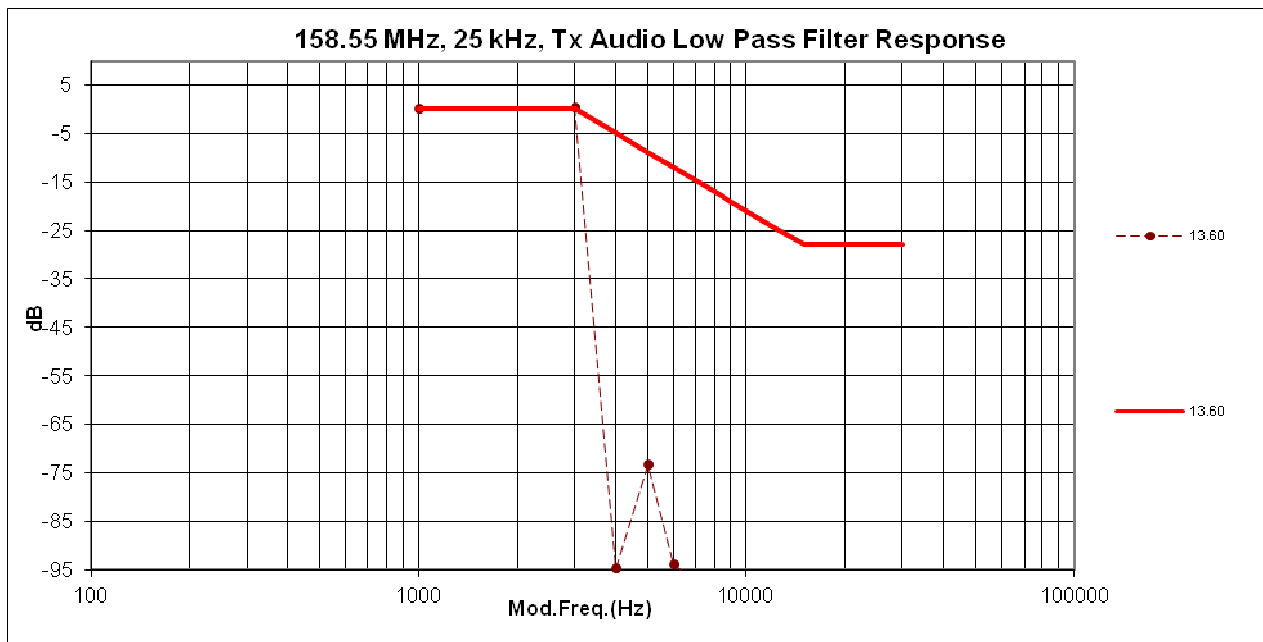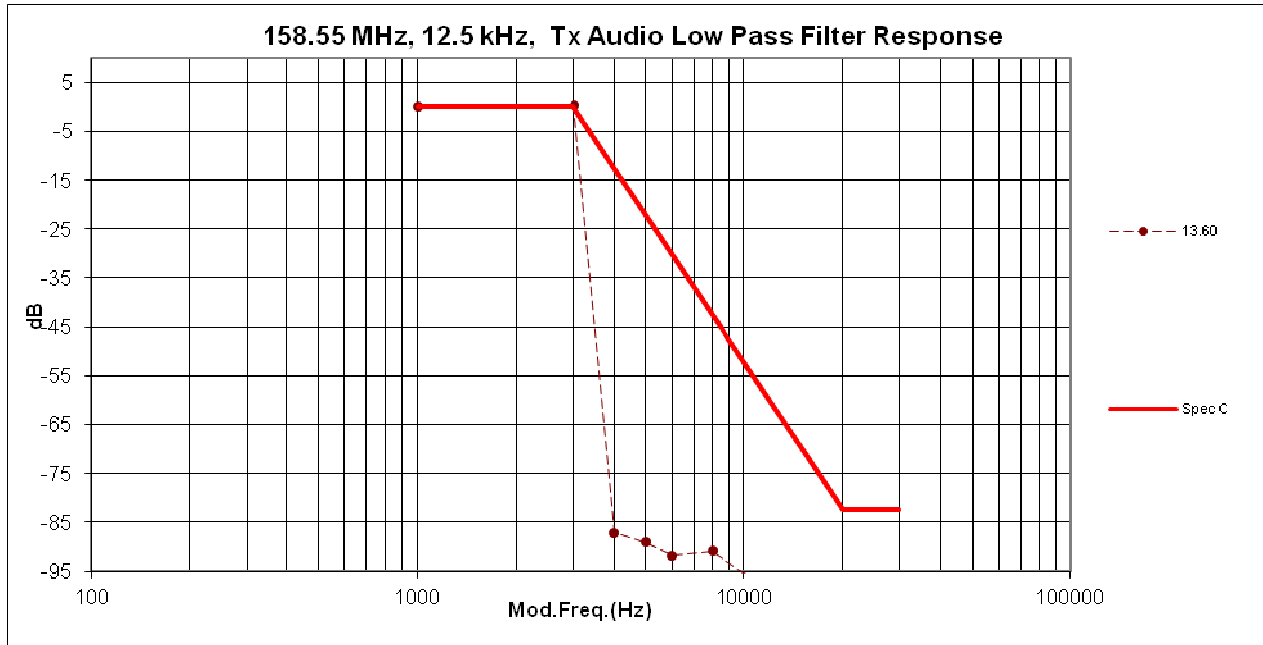

6.4.3. Test Limit

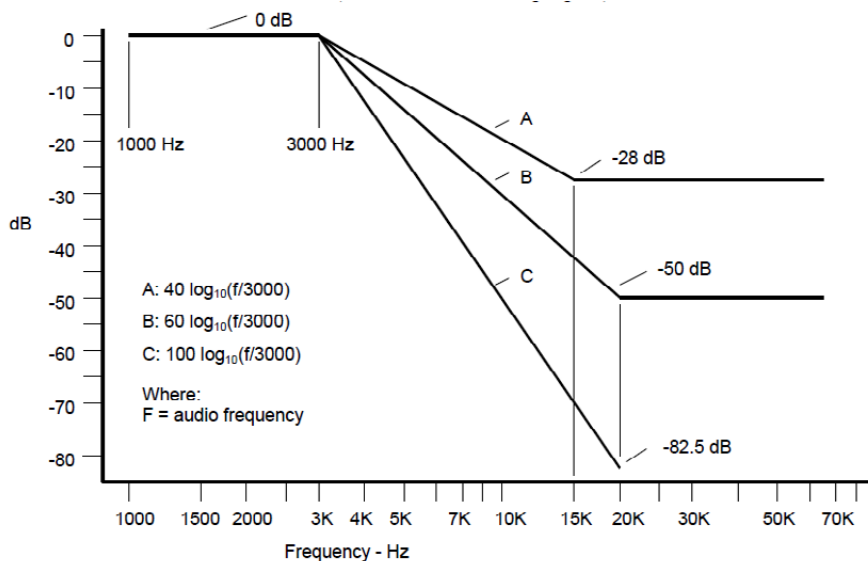

For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- a) For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:

At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $40 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.

- b) For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz:

At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least: $60 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.

At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.


- c) For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz.

At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: $100 \log_{10}(f/3000)$ dB

where: f is the audio frequency in Hz.



6.5. Modulation Limiting

6.5.1. Test Setup

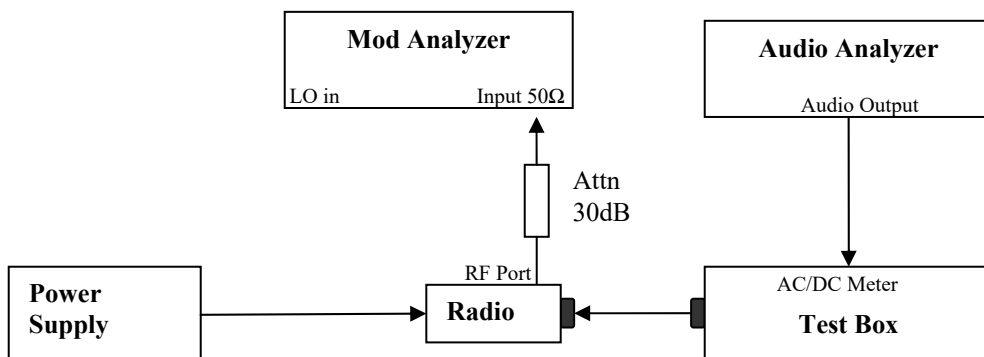

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Path loss for the measurement included.
- 3) Set the audio bandwidth filter to 15 kHz.
- 4) Transmit the radio and set the audio analyzer to 1 kHz audio frequency and 60% of the Full rated system deviation.
- 5) Record the frequency deviation as 0dB input level at 1kHz audio frequency.
- 6) Repeat the step and record the frequency deviation from -20 dB to 20dB by 5 dB increments and different audio freq 300 Hz, 2.5 kHz and 3 kHz.

6.5.2. Test Result

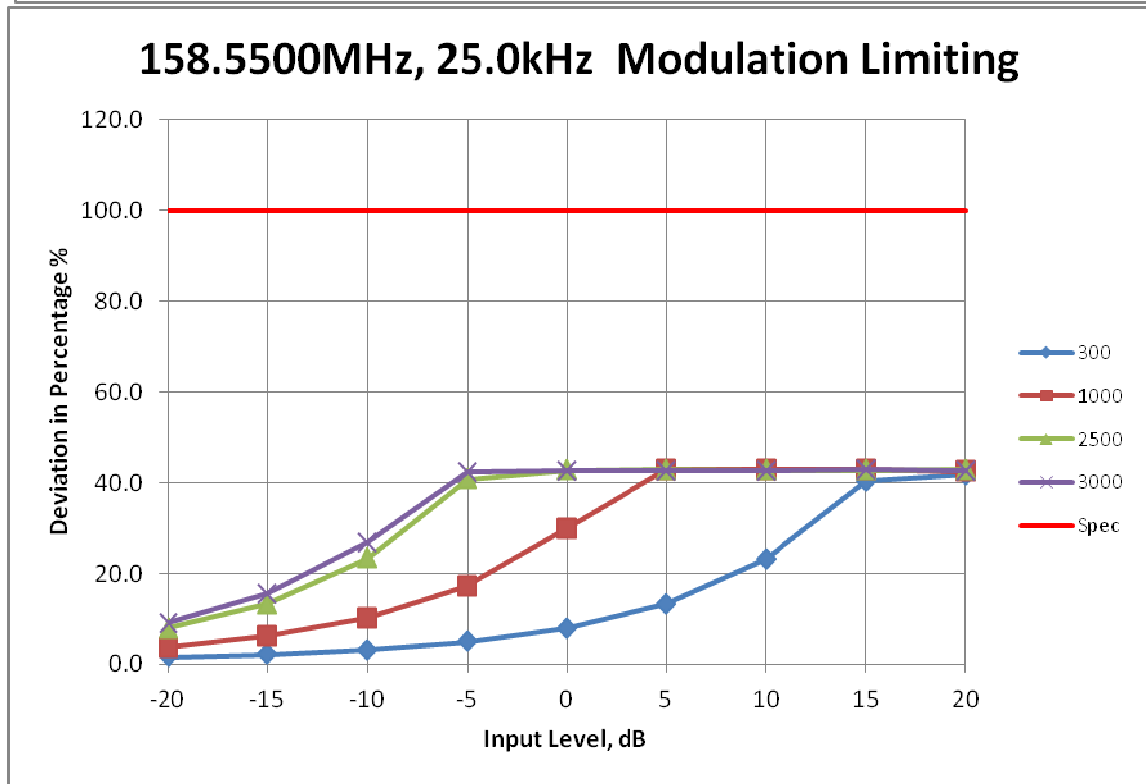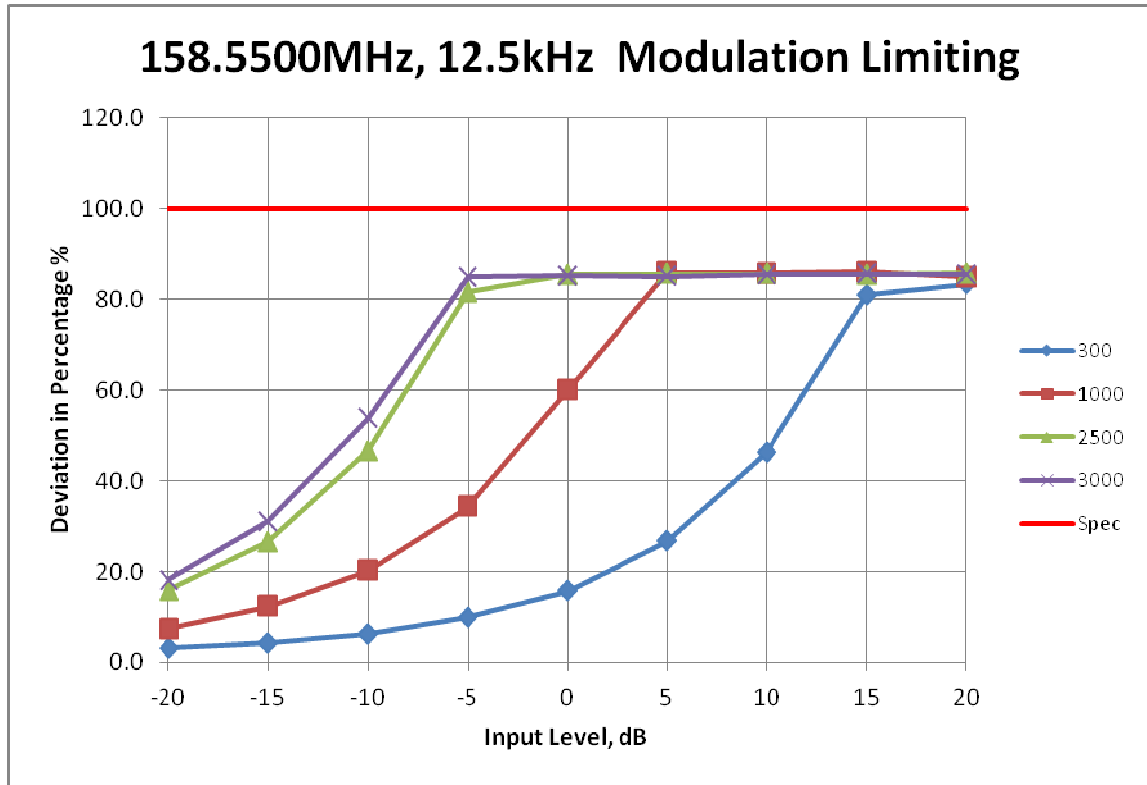


6.5.3. Test Limit

Modulation Limiting shall not exceed 100 percent.

6.6. Occupied Bandwidth

6.6.1. Test Setup (Analog)

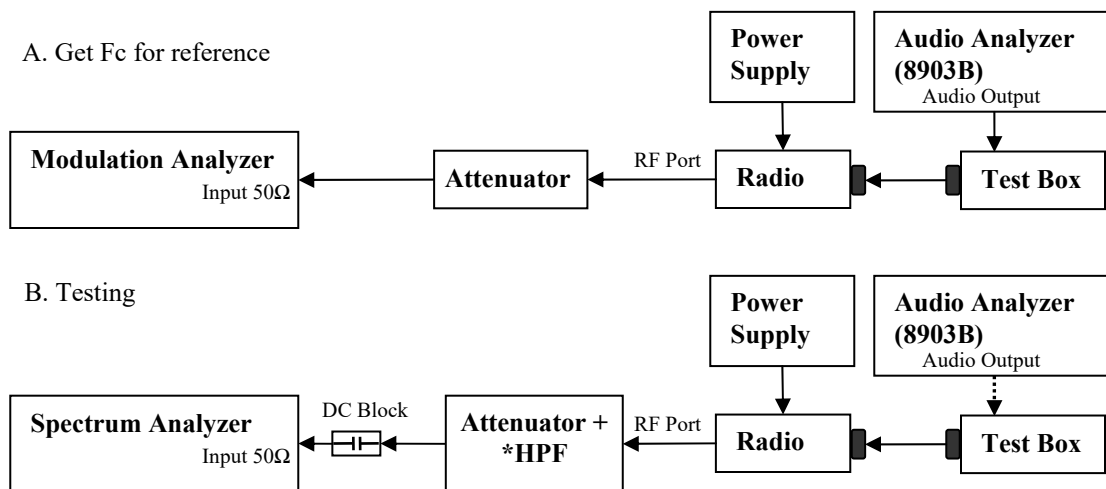

- 1) The DUT transmitter output port was connected to Modulation Analyzer.
- 2) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 3) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 4) Path loss for the measurement included.
- 5) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 6) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 7) Transmit the DUT and record the occupied Bandwidth frequency.
- 8) Preset the spectrum analyzer for sideband spectrum measurement.
- 9) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 10) Save the screen shot as modulated signal
- 11) Remove the audio tone from audio analyzer to capture unmodulated signal.

* Only HPF added for Mask 80.211 measurement with attenuator.

6.6.2. Test Result (Analog)

Standard Audio Modulation (25 kHz Channelization, Analog Voice):
 Emission Designator 16K0F3E

In this case, the maximum modulating frequency is 3 kHz with a 5 kHz deviation.

$$BW = 2(M+D) = 2*(3 \text{ kHz} + 5 \text{ kHz}) = 16 \text{ kHz} \Rightarrow 16K0$$

F3E portion of the designator indicates voice.

Therefore, the entire designator for 25 kHz channelization analog voice is 16K0F3E


Standard Audio Modulation (12.5 kHz Channelization, Analog Voice):
 Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.


$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \Rightarrow 11K0$$

F3E portion of the designator indicates voice.


Therefore, the entire designator for 12.5 kHz channelization analog voice is 11K0F3E.

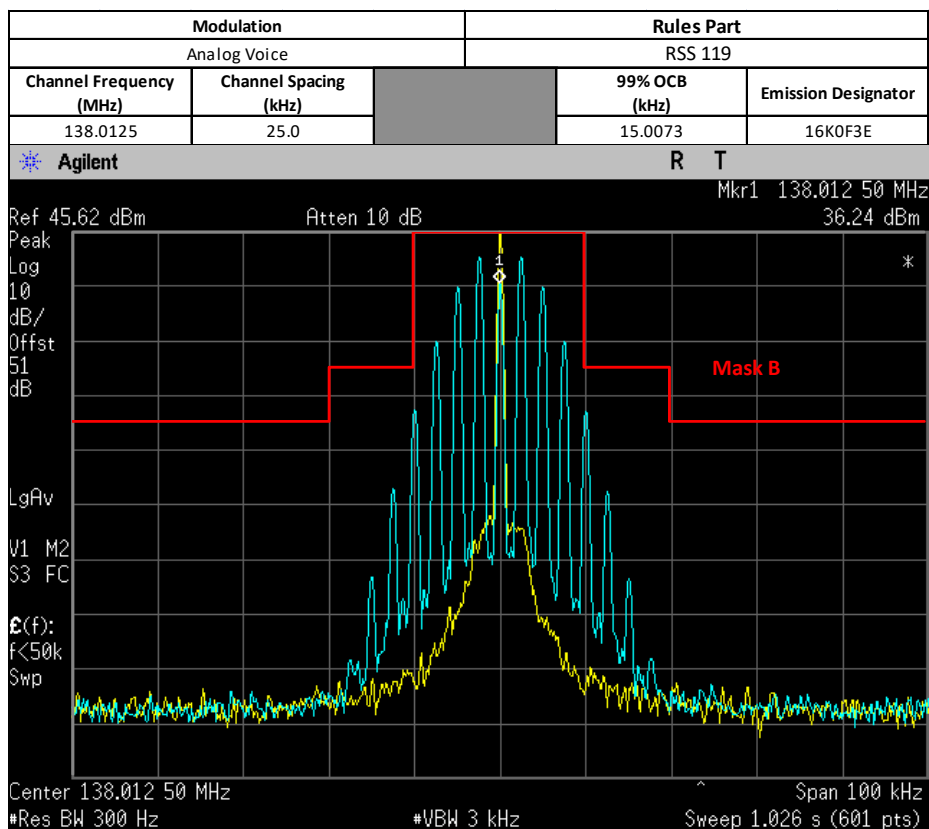


Not For FCC Review

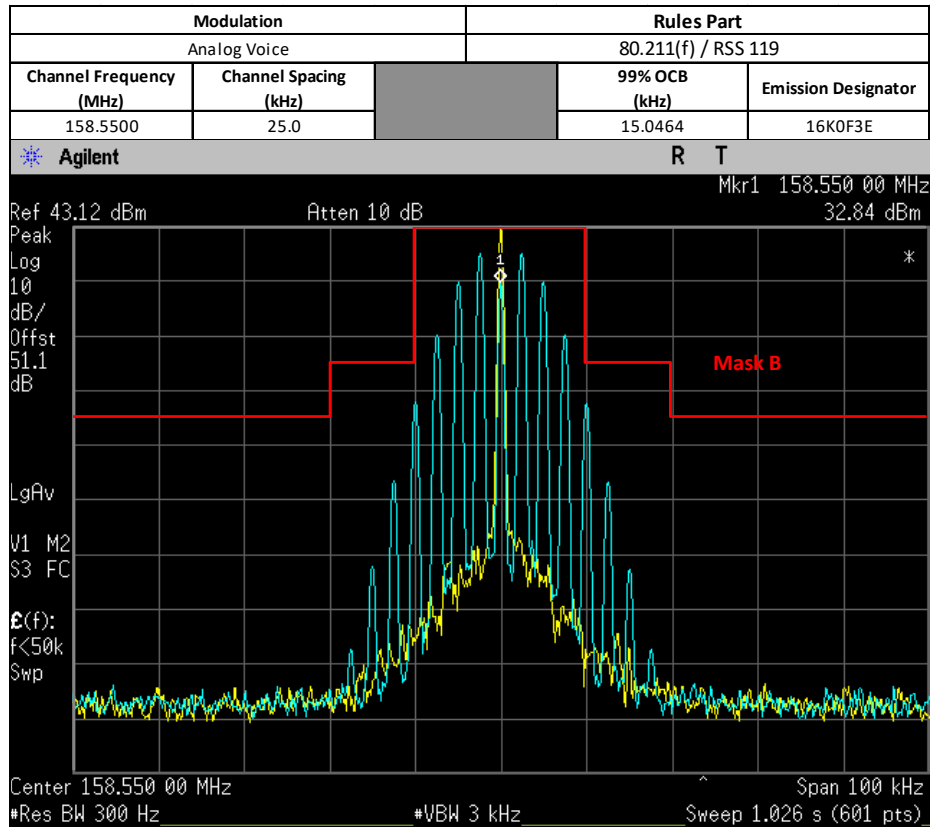


NOT FOR FCC REVIEW

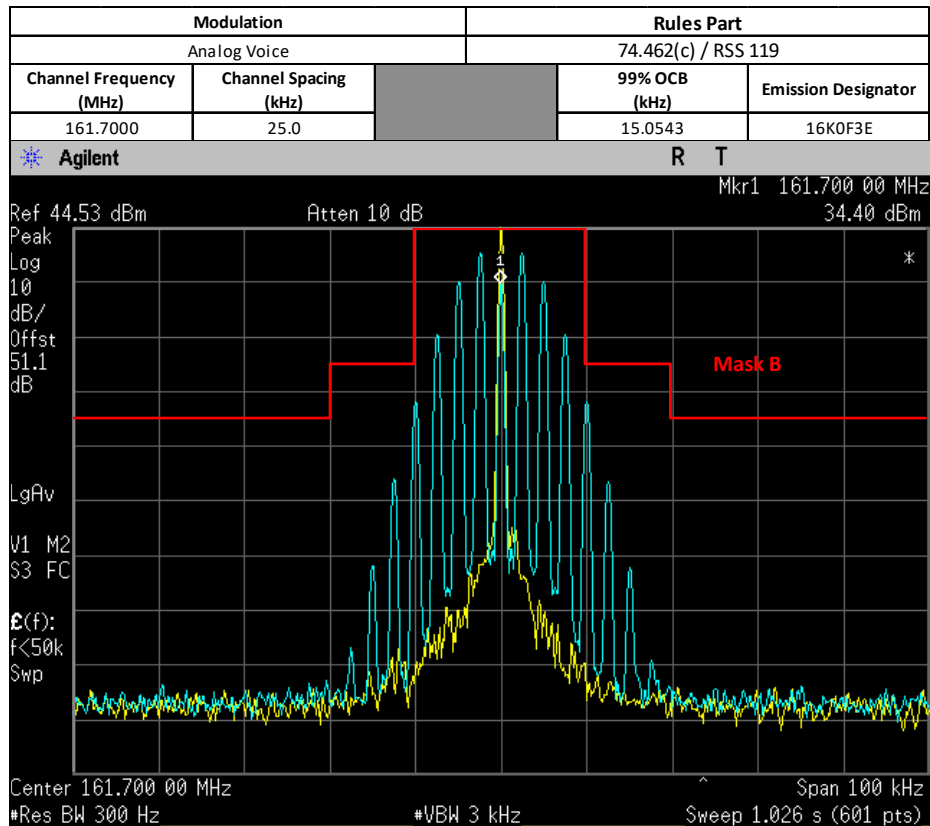



For Part 74

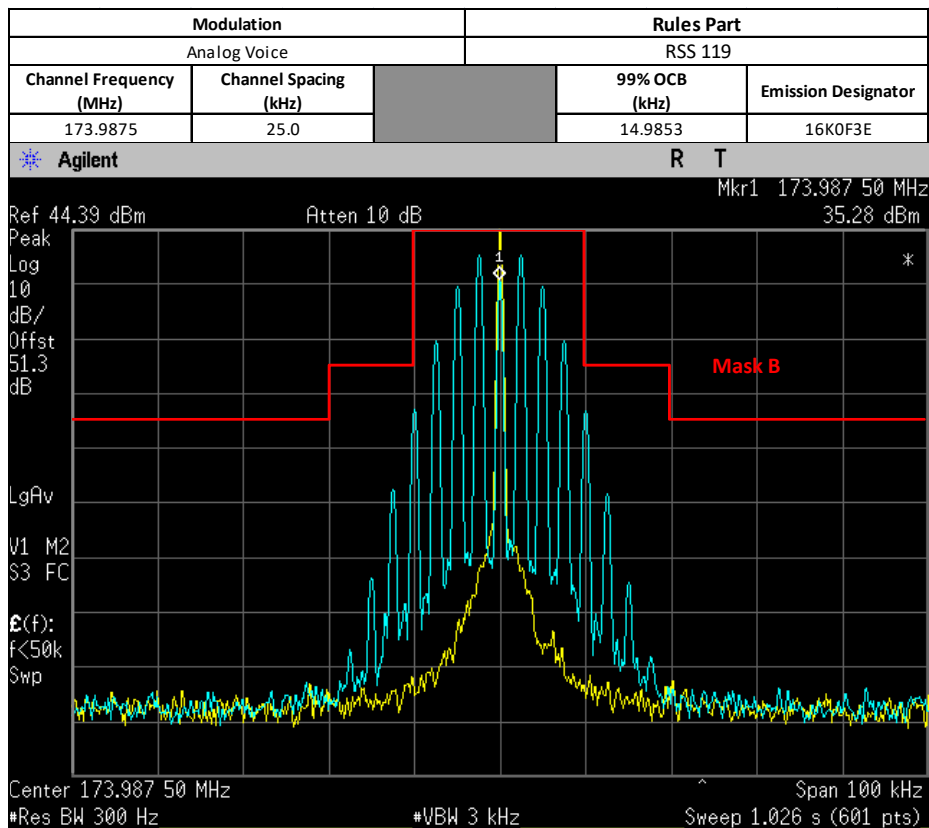


Not For FCC Review

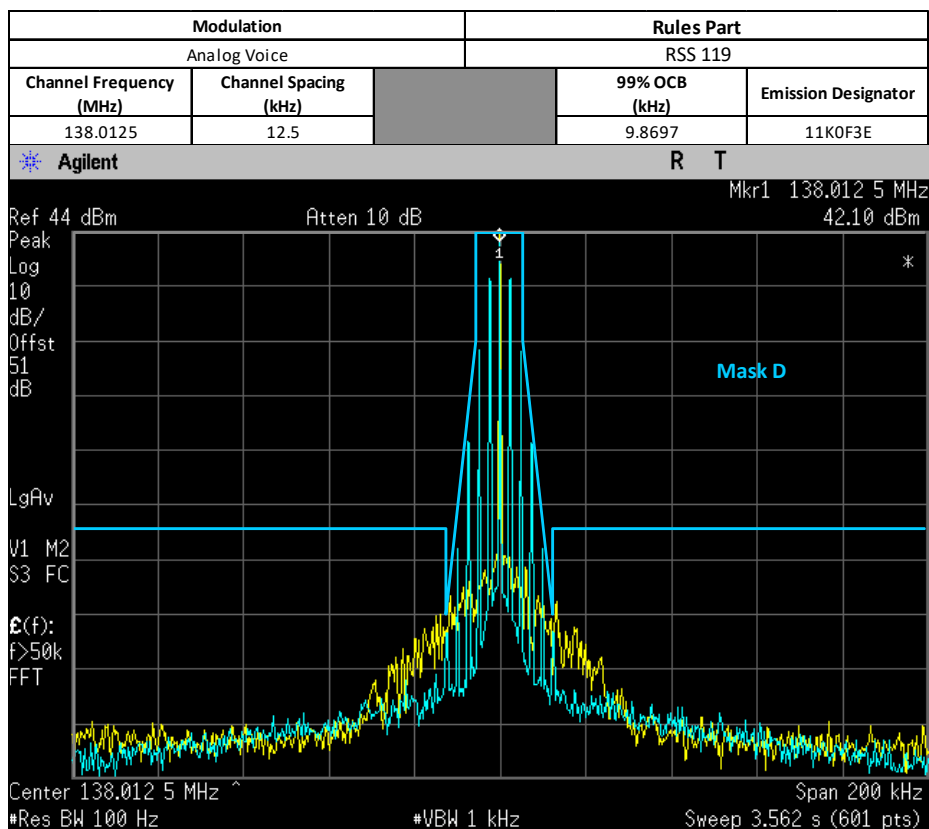



Not For FCC Review

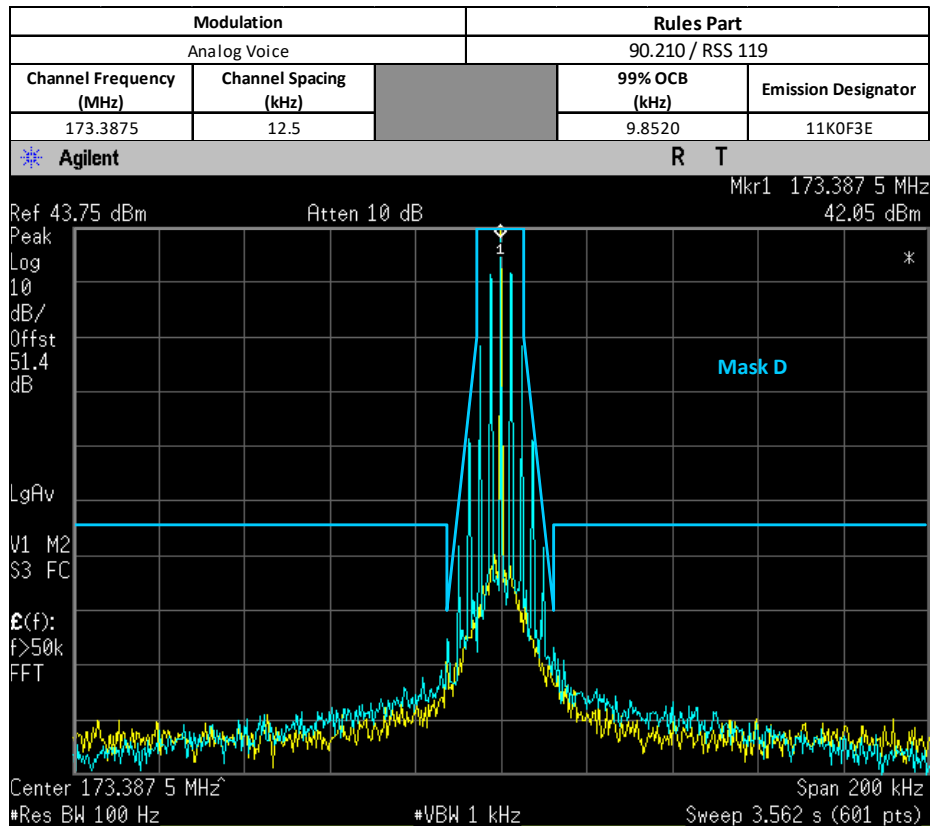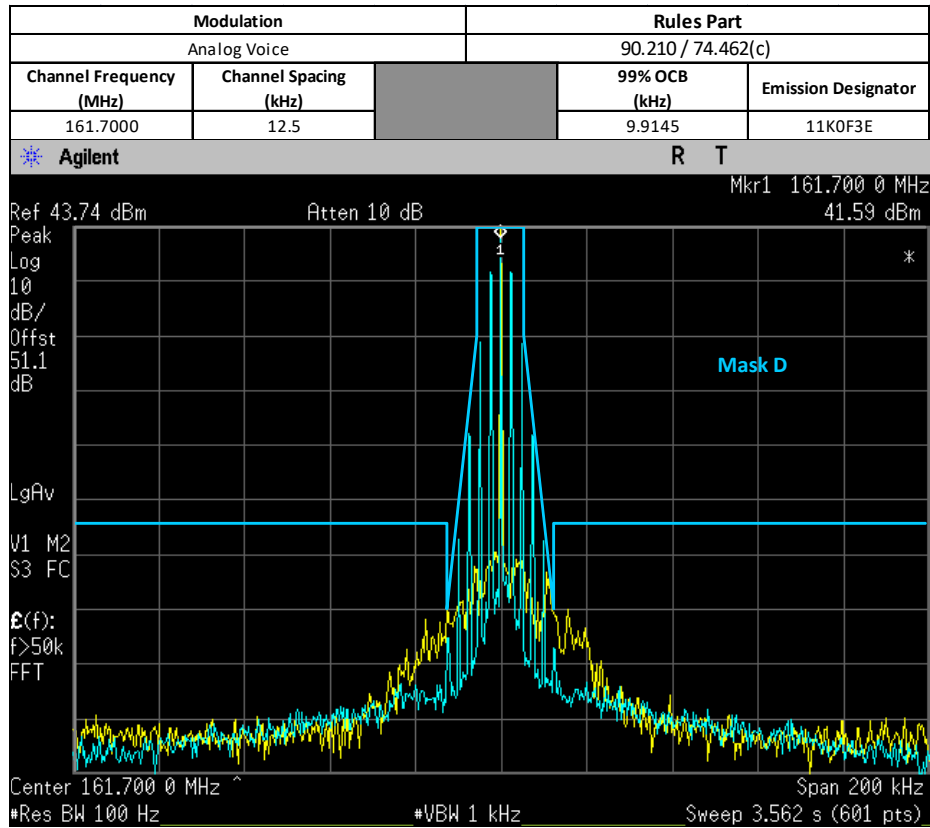

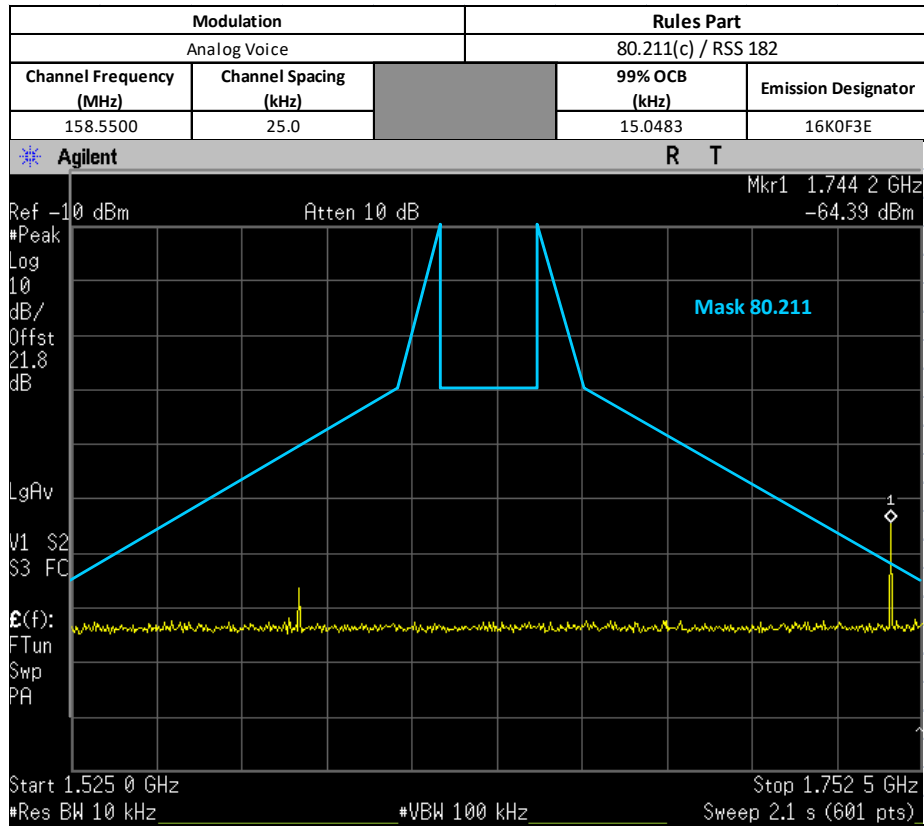


For Part 80 (NOTE: Emission at 1.744GHz is 11th harmonic of fundamental frequency and thus is exempted from the mask as per 80.211(c)(6)) (NOT FOR FCC REVIEW)

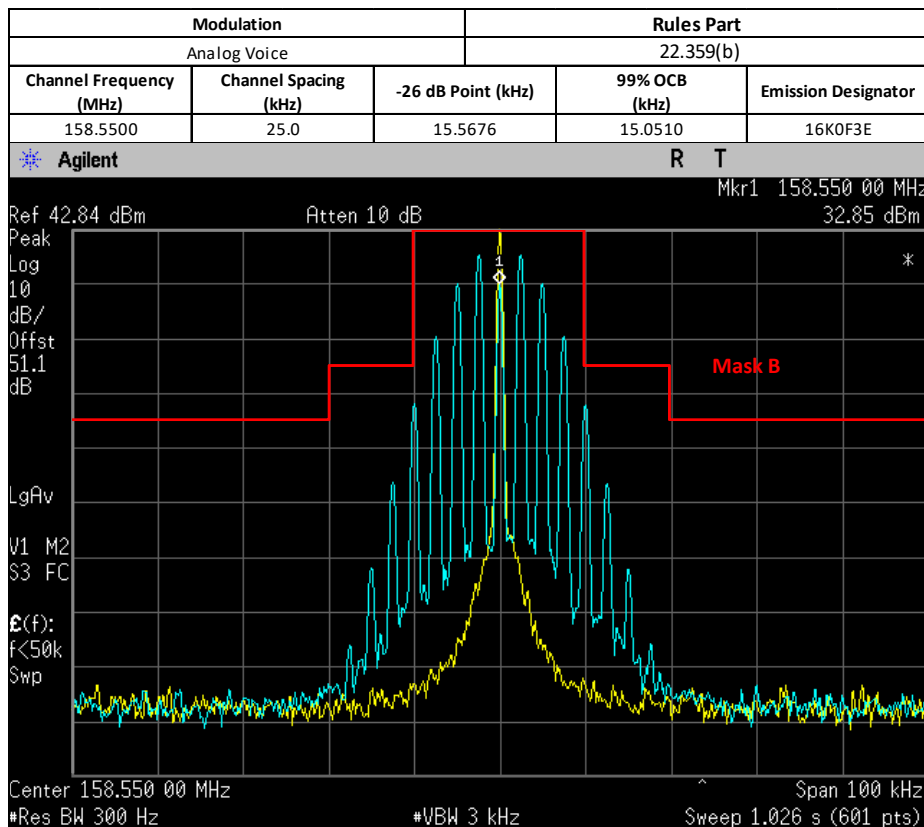

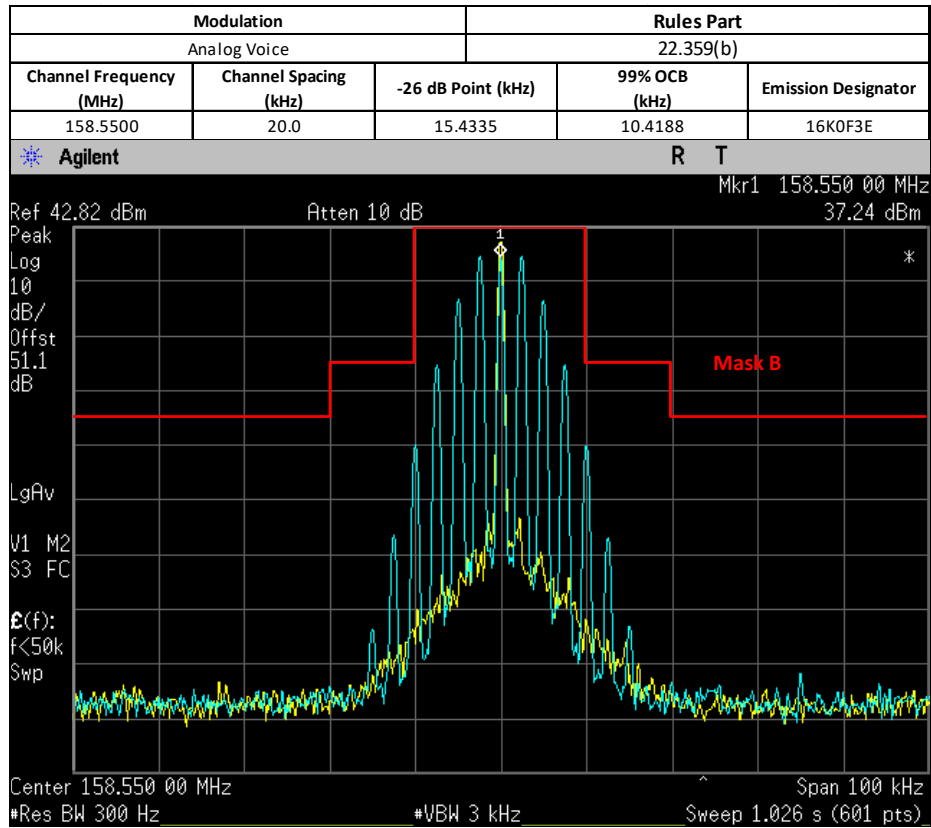

6.6.3. Test Setup (Digital)

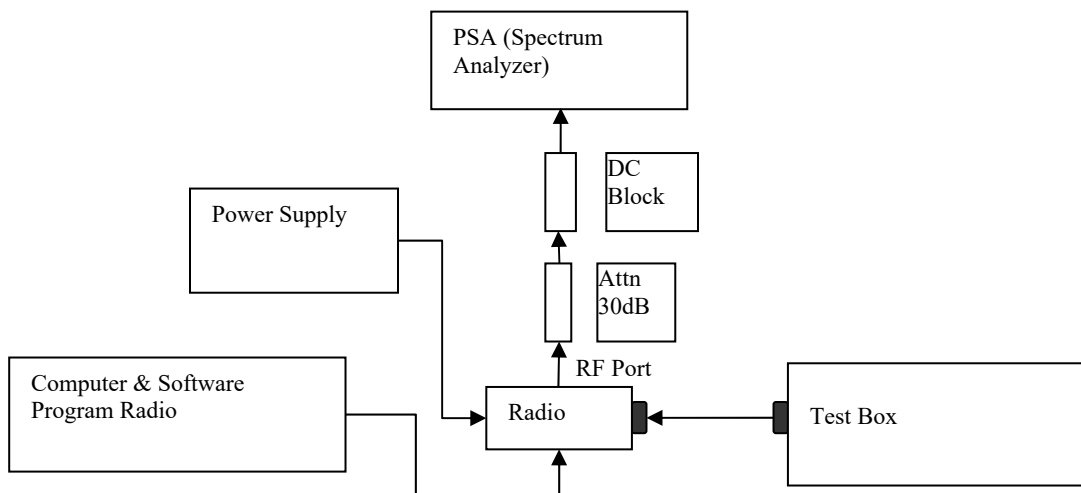

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth (1 ~ 5 % of emission designator).
- 5) Transmit the DUT and record the occupied Bandwidth frequency.
- 6) Preset the spectrum analyzer for modulation emission spectrum measurement.
- 7) Set the span and Resolution Bandwidth (according to FCC/ ISED standard).
- 8) Capture the screen shot as modulated signal.

*Note:

- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.


6.6.4. Test Result (Digital)

Digital (12.5 kHz Channelization, Digital Data/Voice/Voice+Data):
 Emission Designator 7K60F1D/7K60F1E/7K60F1W



The 99% energy rule (title 47CFR 2.989) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60kHz Measurements were performed in accordance with TIA/EIA TSB102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).


F1D/E/W portion of the designator indicates digital data/voice/voice+data.

Therefore, the entire designator for 12.5 kHz channelization digital data is 7K60F1D / 7K60F1E / 7K60F1W

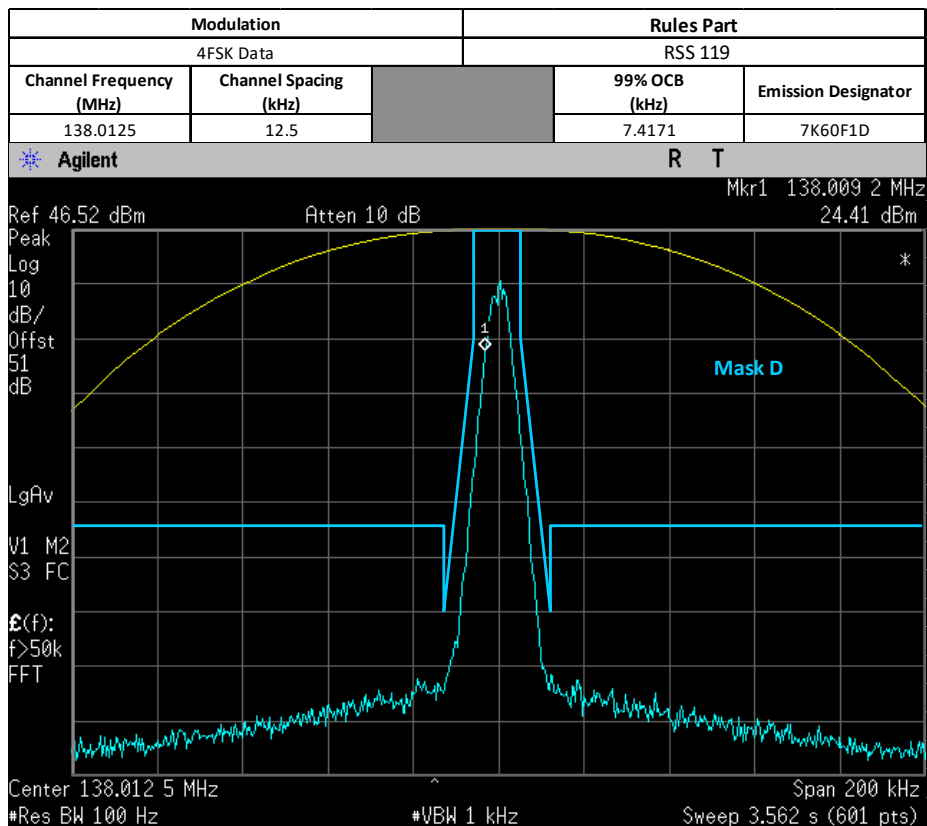




Not For FCC Review

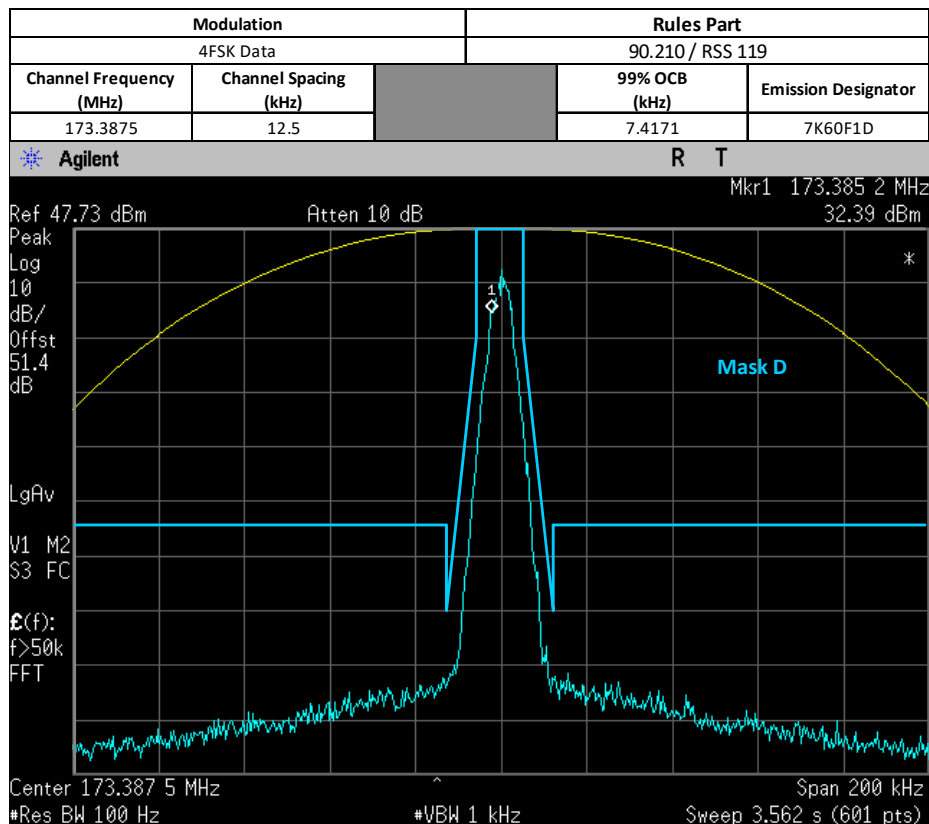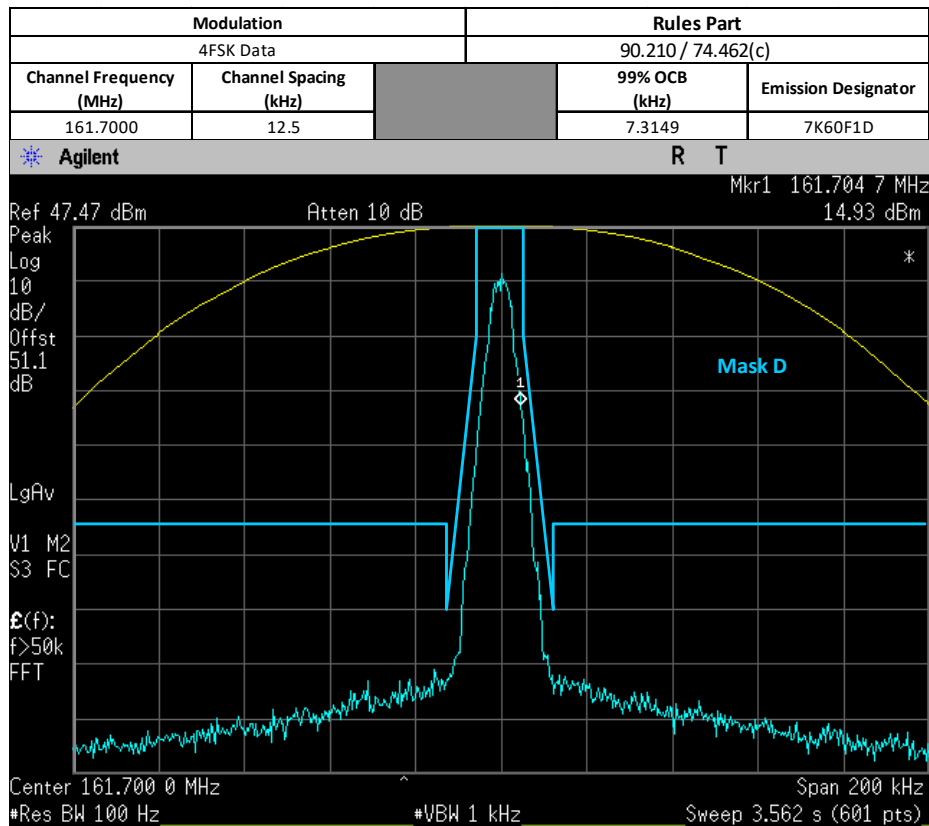


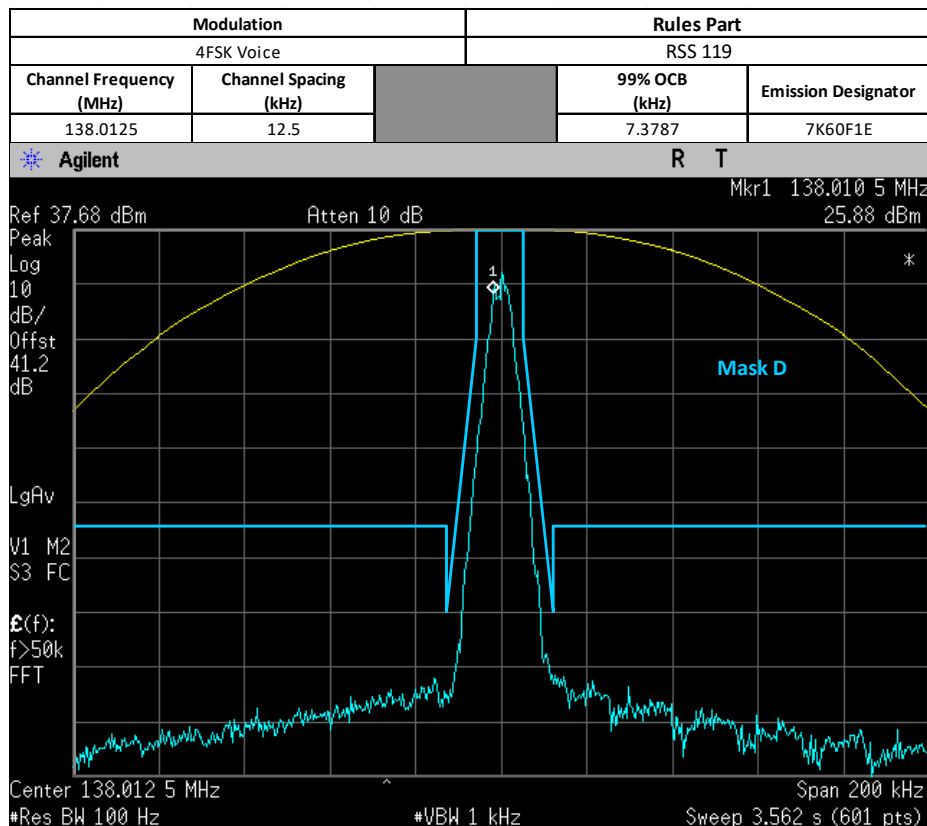




Not For FCC Review

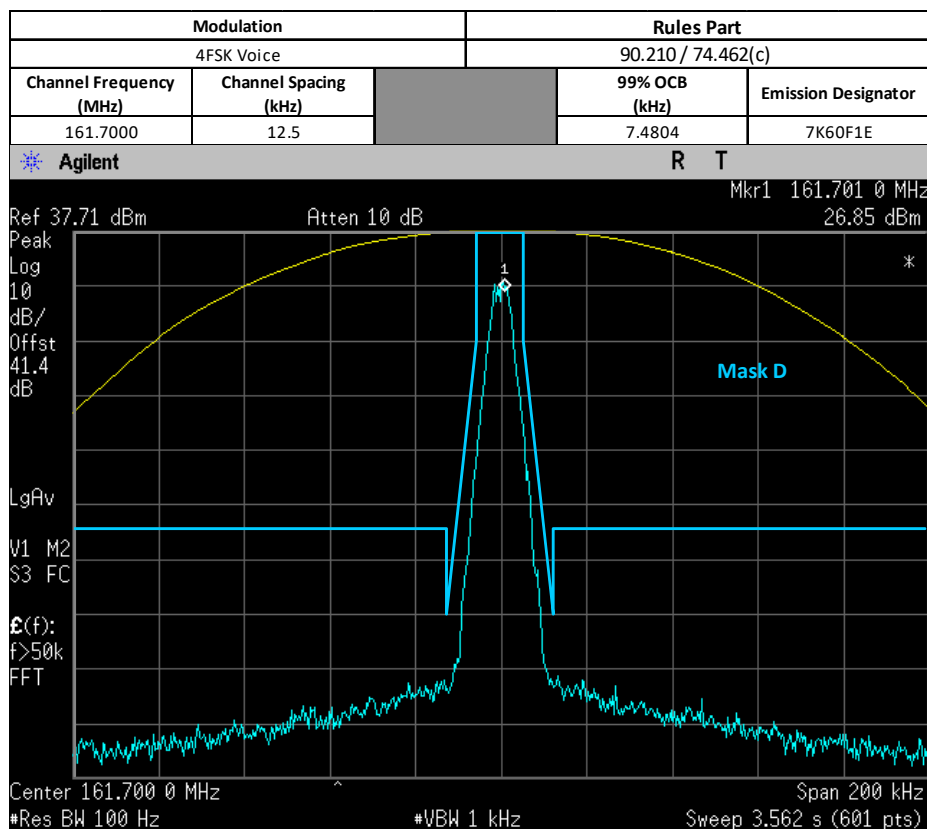


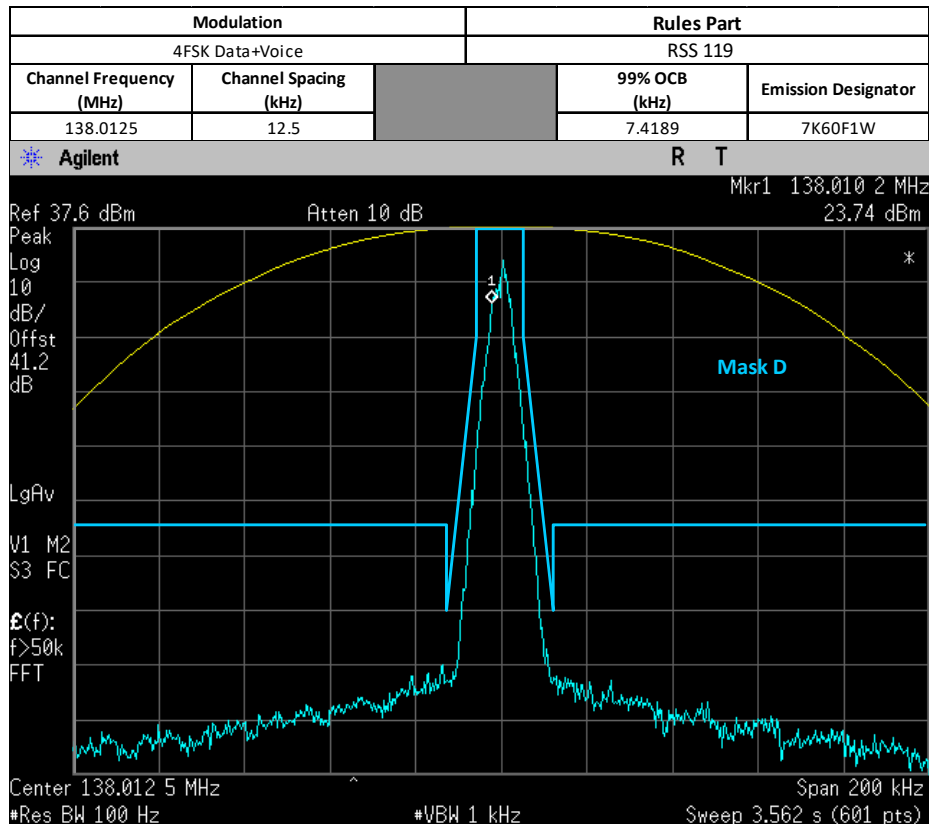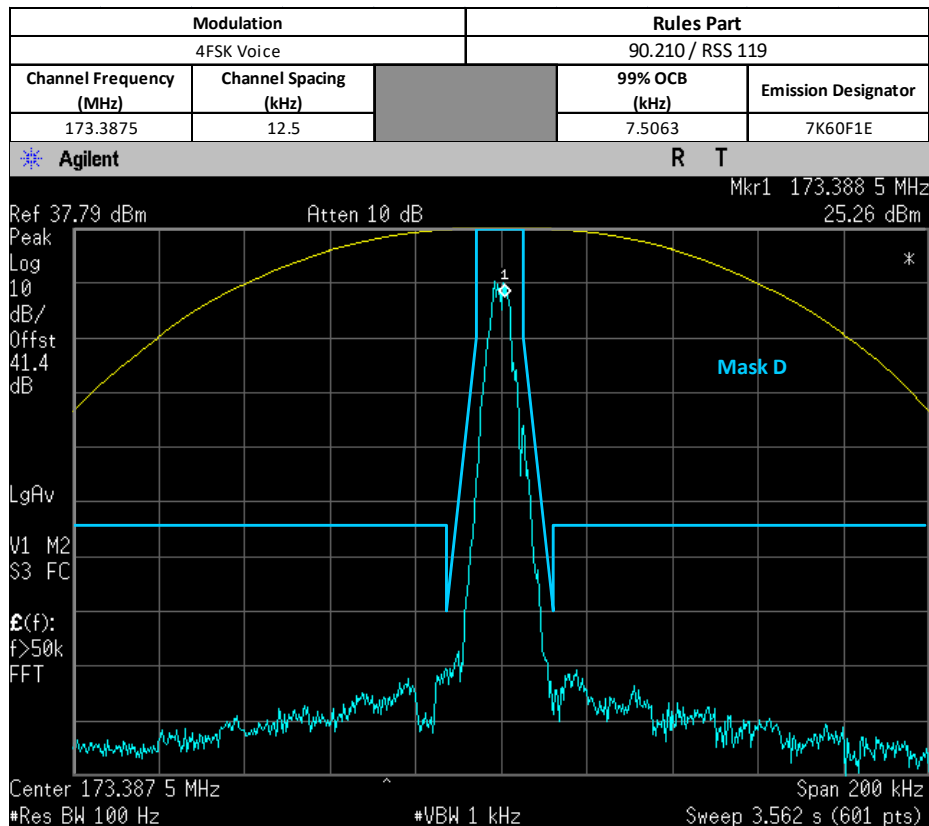

Not For FCC Review

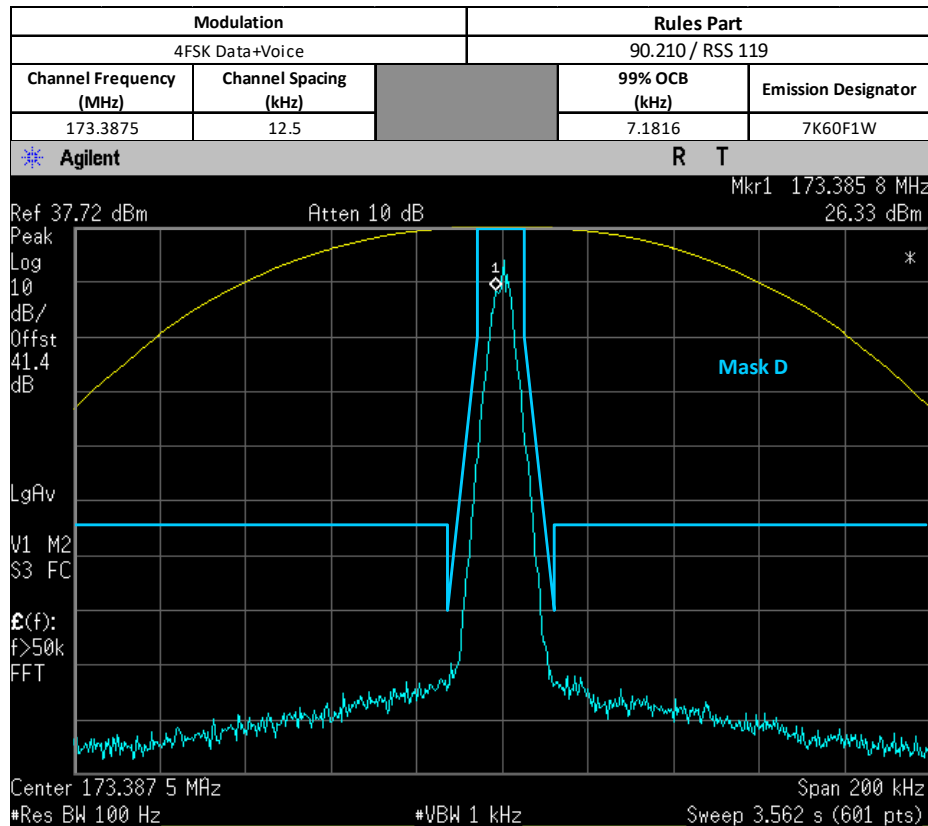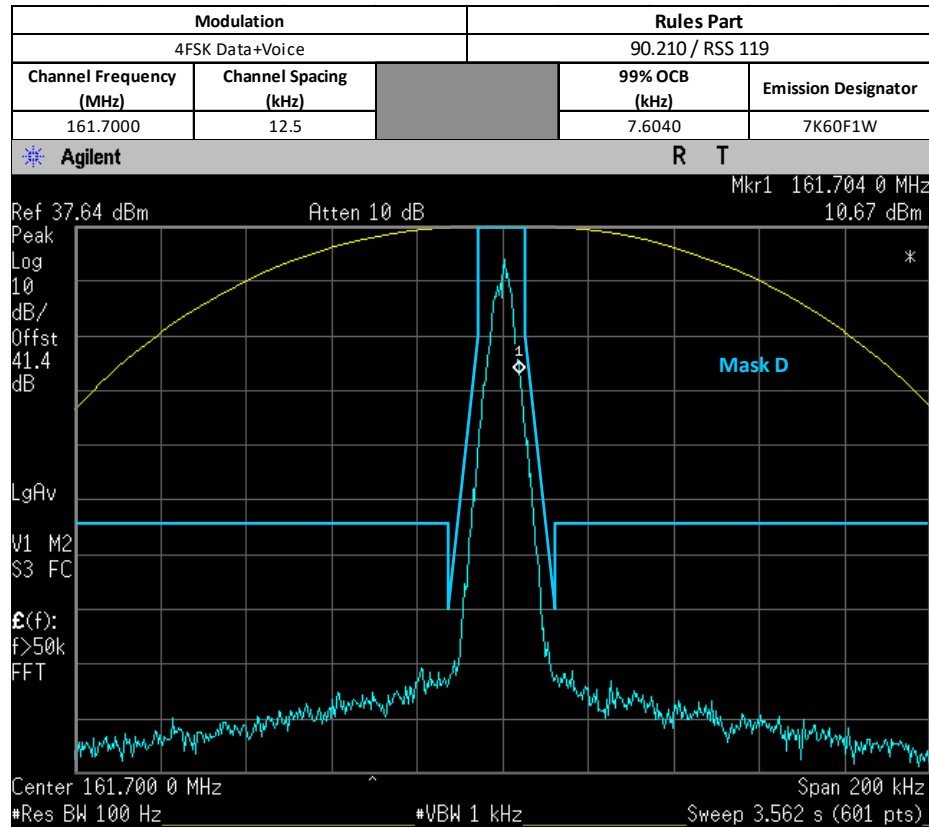

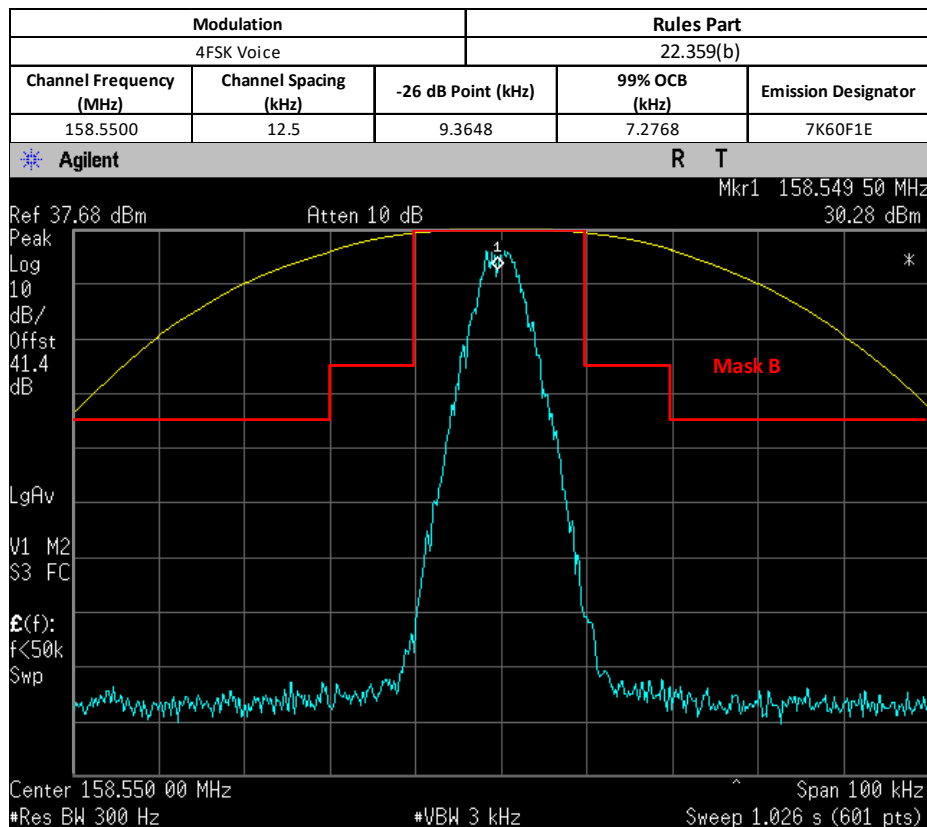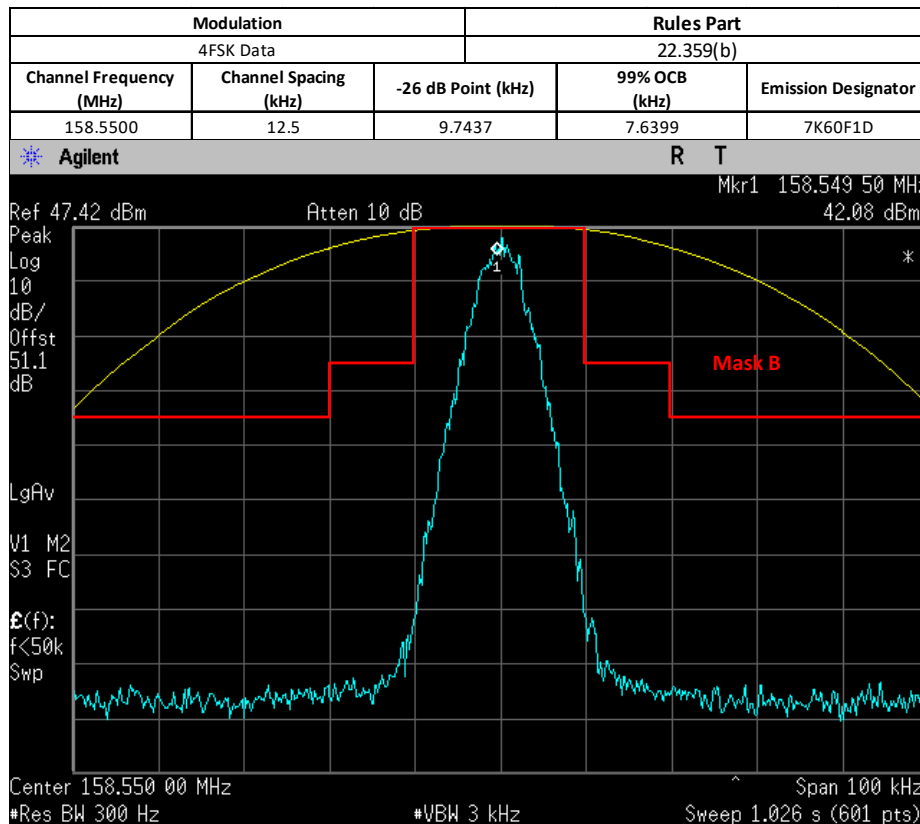

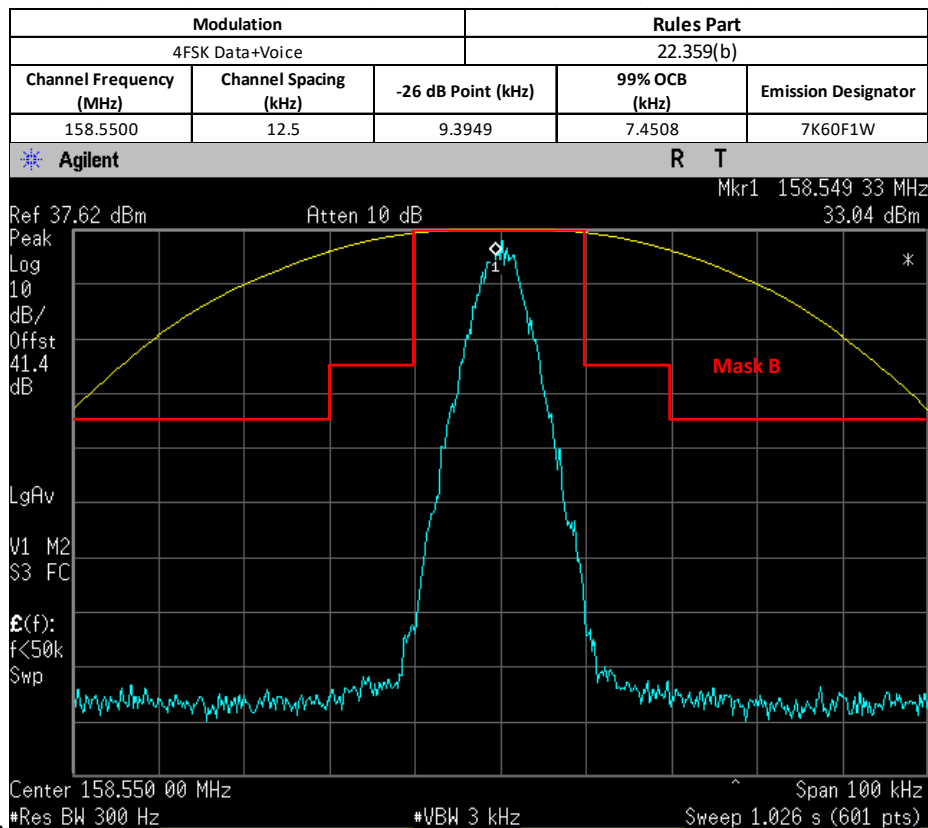


6.6.5. Test Limit

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

6.7. Band Edge Conducted Spurious Emission (Part 22)

6.7.1. Test Setup (Analog)

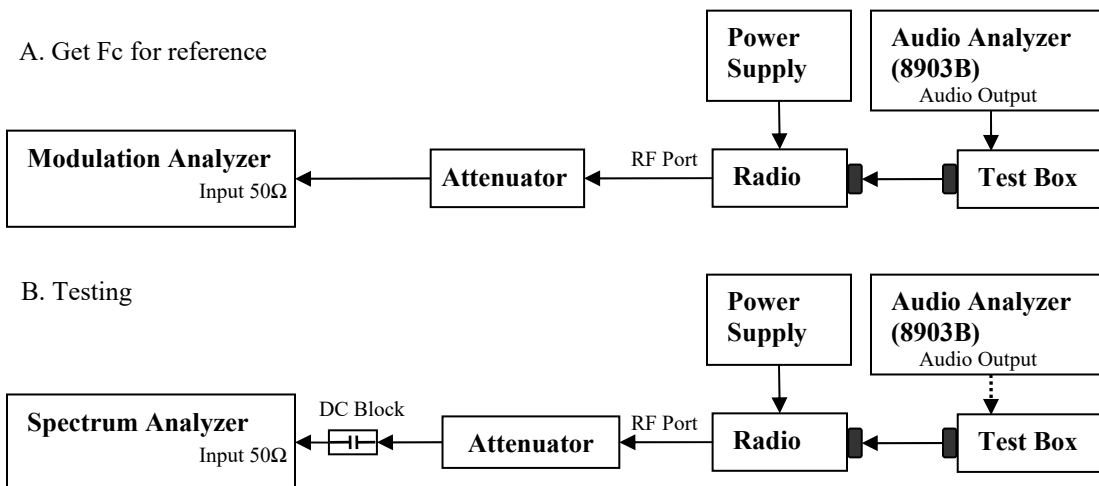


- 2) The DUT transmitter output port was connected to Modulation Analyzer.
- 3) Set the audio bandwidth filter to 15 kHz low pass filter and 50 kHz high pass filter.
- 4) Transmit the radio and set the audio analyzer to 2.5 kHz audio frequency and 50% of the rated deviation. Up the amplitude by 16 dB. Dekey the DUT.
- 5) Path loss for the measurement included.
- 6) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 7) Key in the Fc and Resolution Bandwidth.
- 8) Transmit the DUT and record the occupied Bandwidth frequencies.
- 9) Preset the spectrum analyzer for band edge measurement.
- 10) The band edges of lowest and highest channels were measured.
- 11) Key in the Lowest and highest channel frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 12) Save the screen shot as modulated signal.
- 13) Remove the audio tone from audio analyzer to capture unmodulated signal.

*Note:


- For emission designator ending with F3E, 16K0F3E is the worst case and therefore only 16K0F3E will be shown.

6.7.2. Test Result (Analog)


MAX PWR

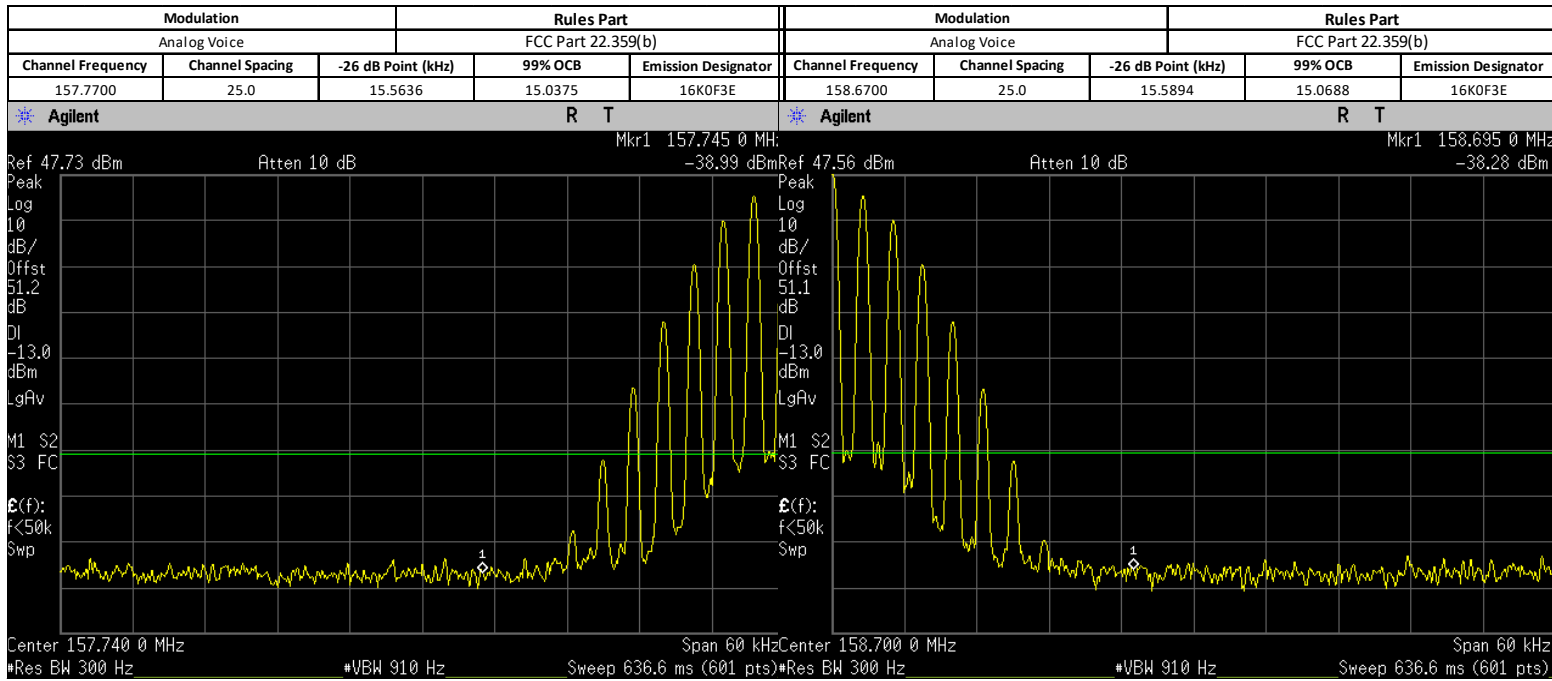

LOW PWR

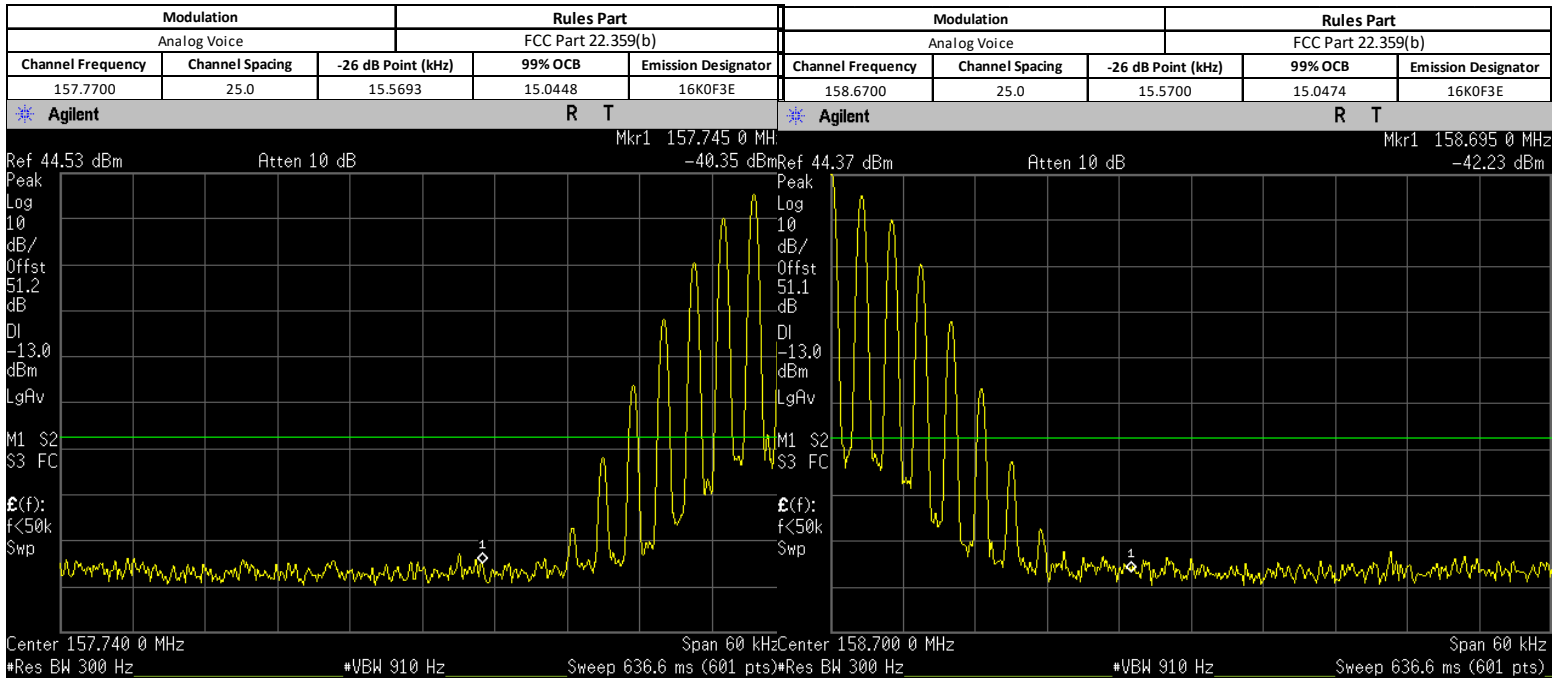

6.7.3. Test Setup (Digital)

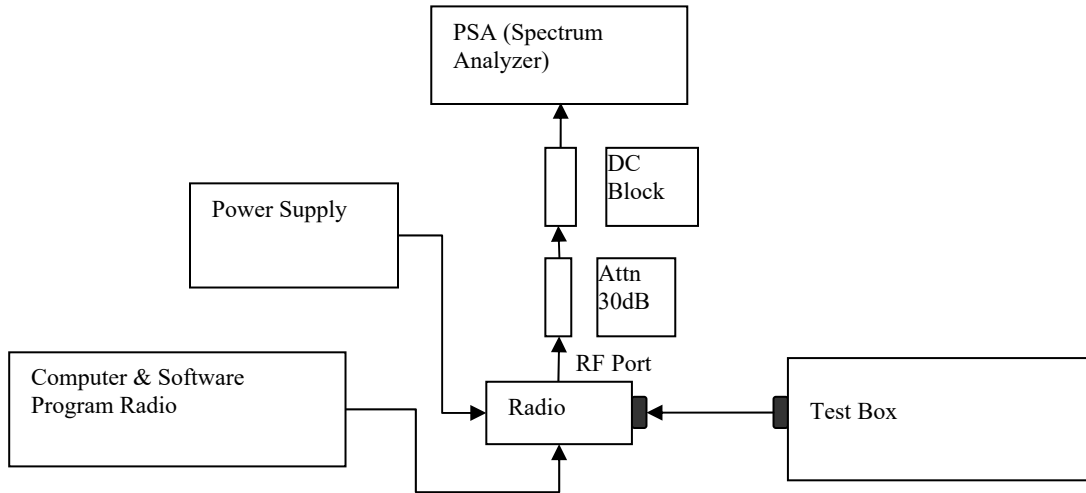


- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (*4FSK, C4FM or other digital modulation form).
- 2) Path loss for the measurement included.
- 3) Select the Occupied Bandwidth measurement for 99% and 26dB Emissions Bandwidth Measurement.
- 4) Key in the Fc and Resolution Bandwidth.
- 5) Transmit radio record the occupied Bandwidth frequencies.
- 6) Preset the spectrum analyzer for band edge measurement.
- 7) Key in the lowest and highest channels frequency, span is 60 kHz and Resolution Bandwidth is at least 1% of Emission Bandwidth.
- 8) Save the screen shot.

*Note:


- For Digital Modulation, 12.5 kHz Data F1D & FXD would be the same. Therefore only measurements with F1D modulation shown below.
- For Digital Modulation, 12.5 kHz Data F1E & FXE would be the same. Therefore only measurements with F1E modulation shown below.

6.7.4. Test Result (Digital)

MAX PWR

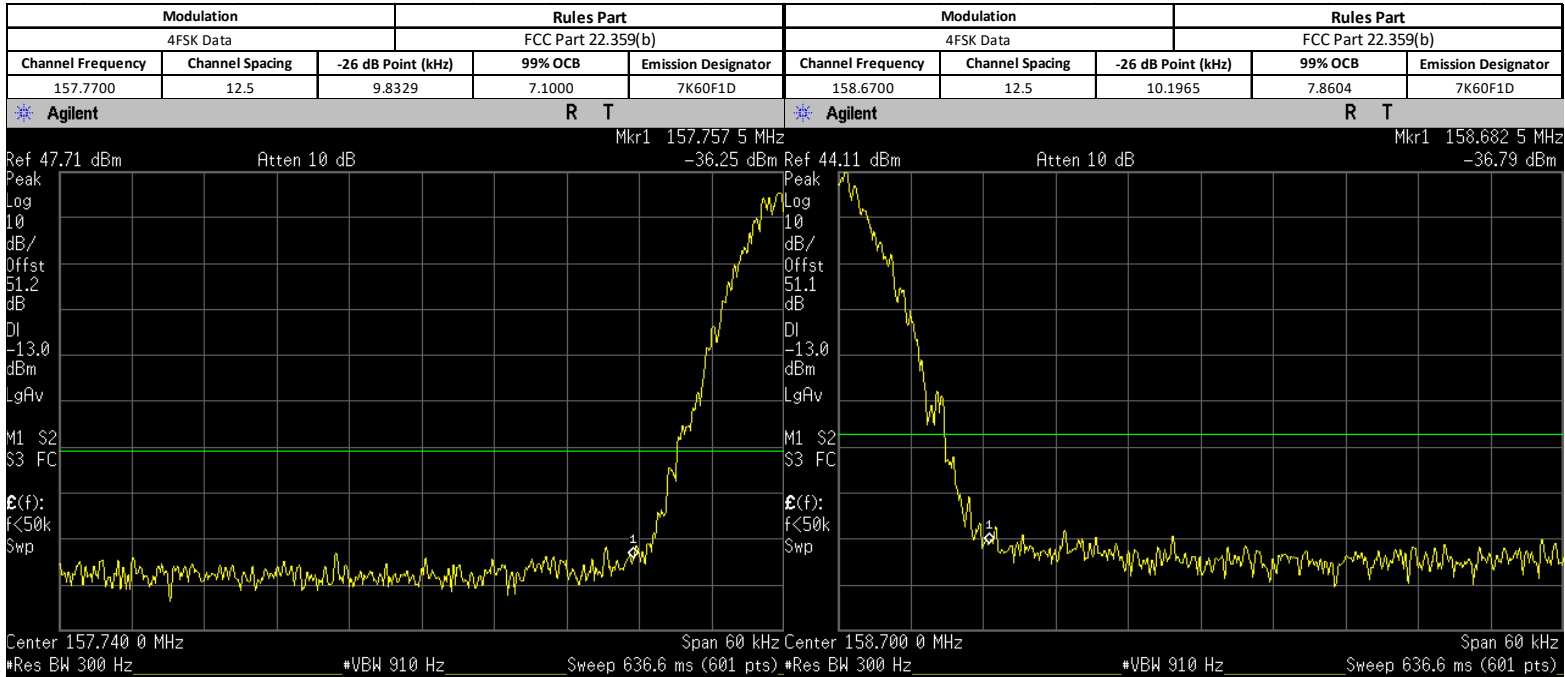

LOW PWR

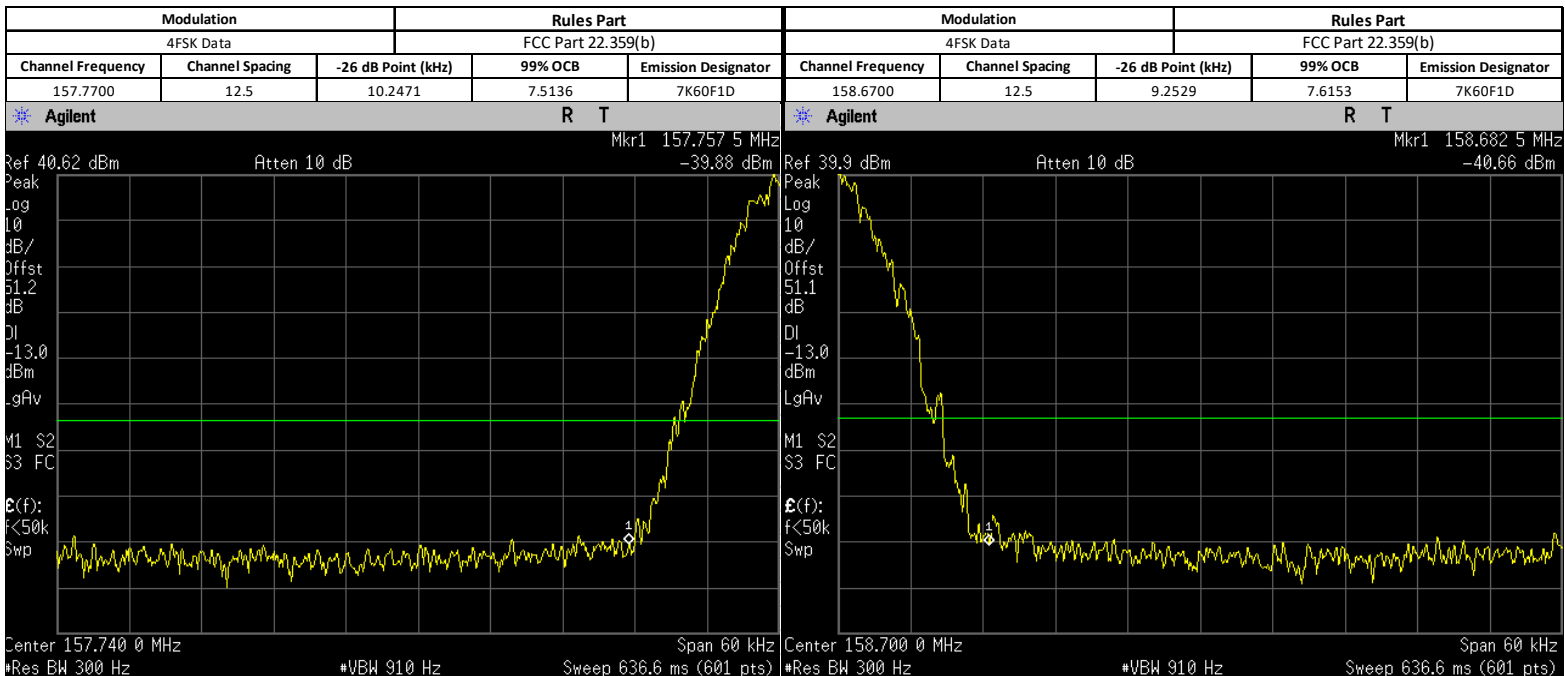


6.7.5. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


6.8. Transient Frequency Behavior


6.8.1. Test Setup

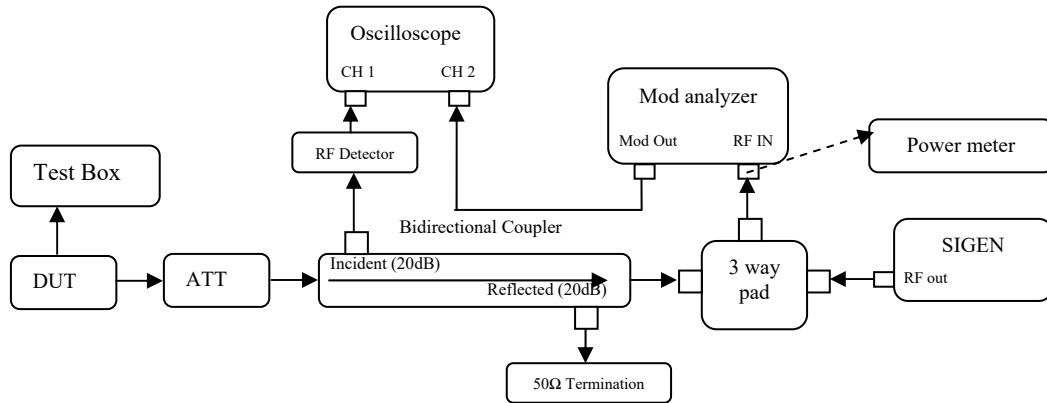

- 1) Connect the setup as figure above.
- 2) Path loss for the measurement included.
- 3) Set on Sigen with the assigned center frequency, internal 1 kHz FM tone.
FM Deviation: Analog 25kHz Channel Spacing = 25 kHz
Analog 12.5 kHz Channel Spacing = 12.5 kHz
C4FM = 12.5 kHz
- 4) Turn on 50 kHz high pass filter and 15 kHz low pass filter on modulation analyzer.
- 5) Supply sufficient attenuation ATT to provide the output power of $\leq -11\text{dBm}$ into power meter when DUT is keying up.
- 6) Note the power level on power meter and dekey the DUT.
- 7) Adjust the amplitude of the signal generator to the level power meter, maintained the amplitude throughout the rest of the measurement.
- 8) Connect the output to modulation analyzer.
- 9) Reduce 30dB attenuation and transmit the radio to get the trigger line.
- 10) Capture the screen shot for key-up (rising edge) and de-key (falling edge) mode.

6.8.2. Test Result

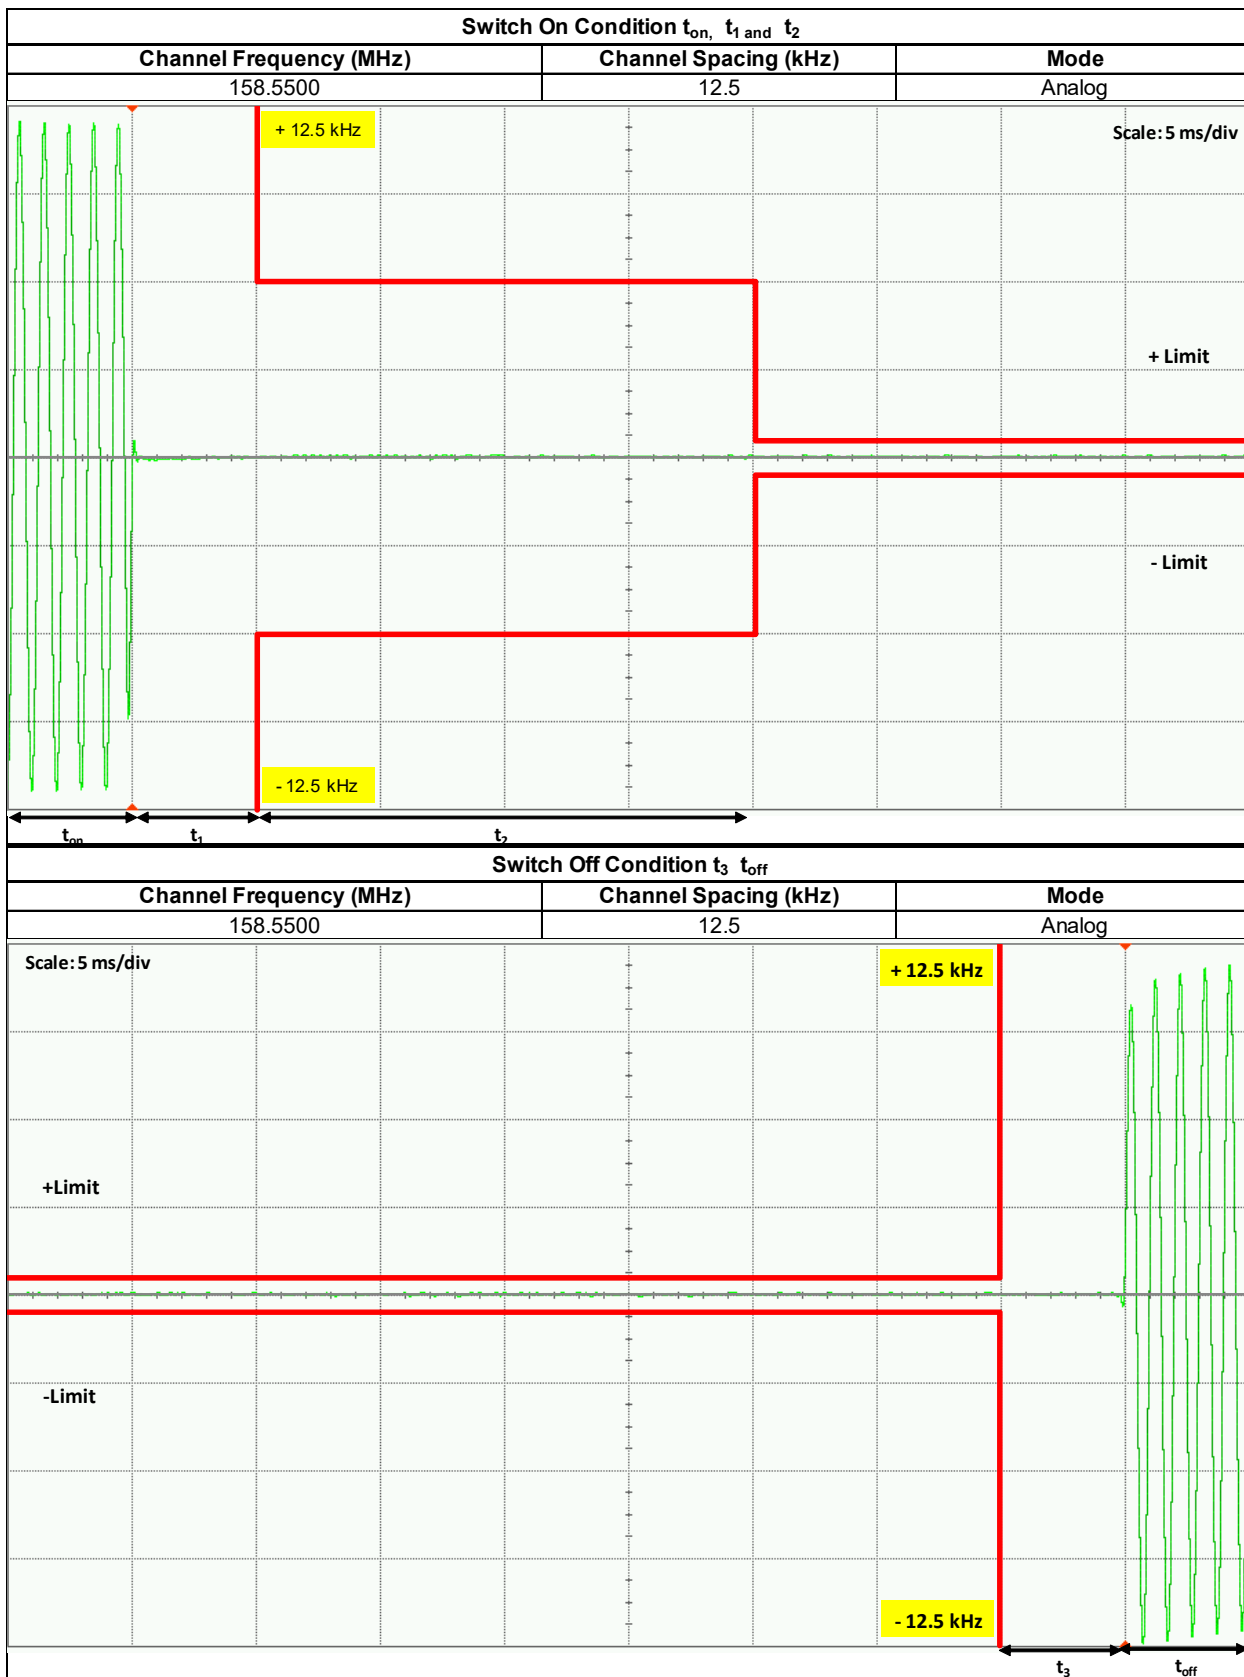

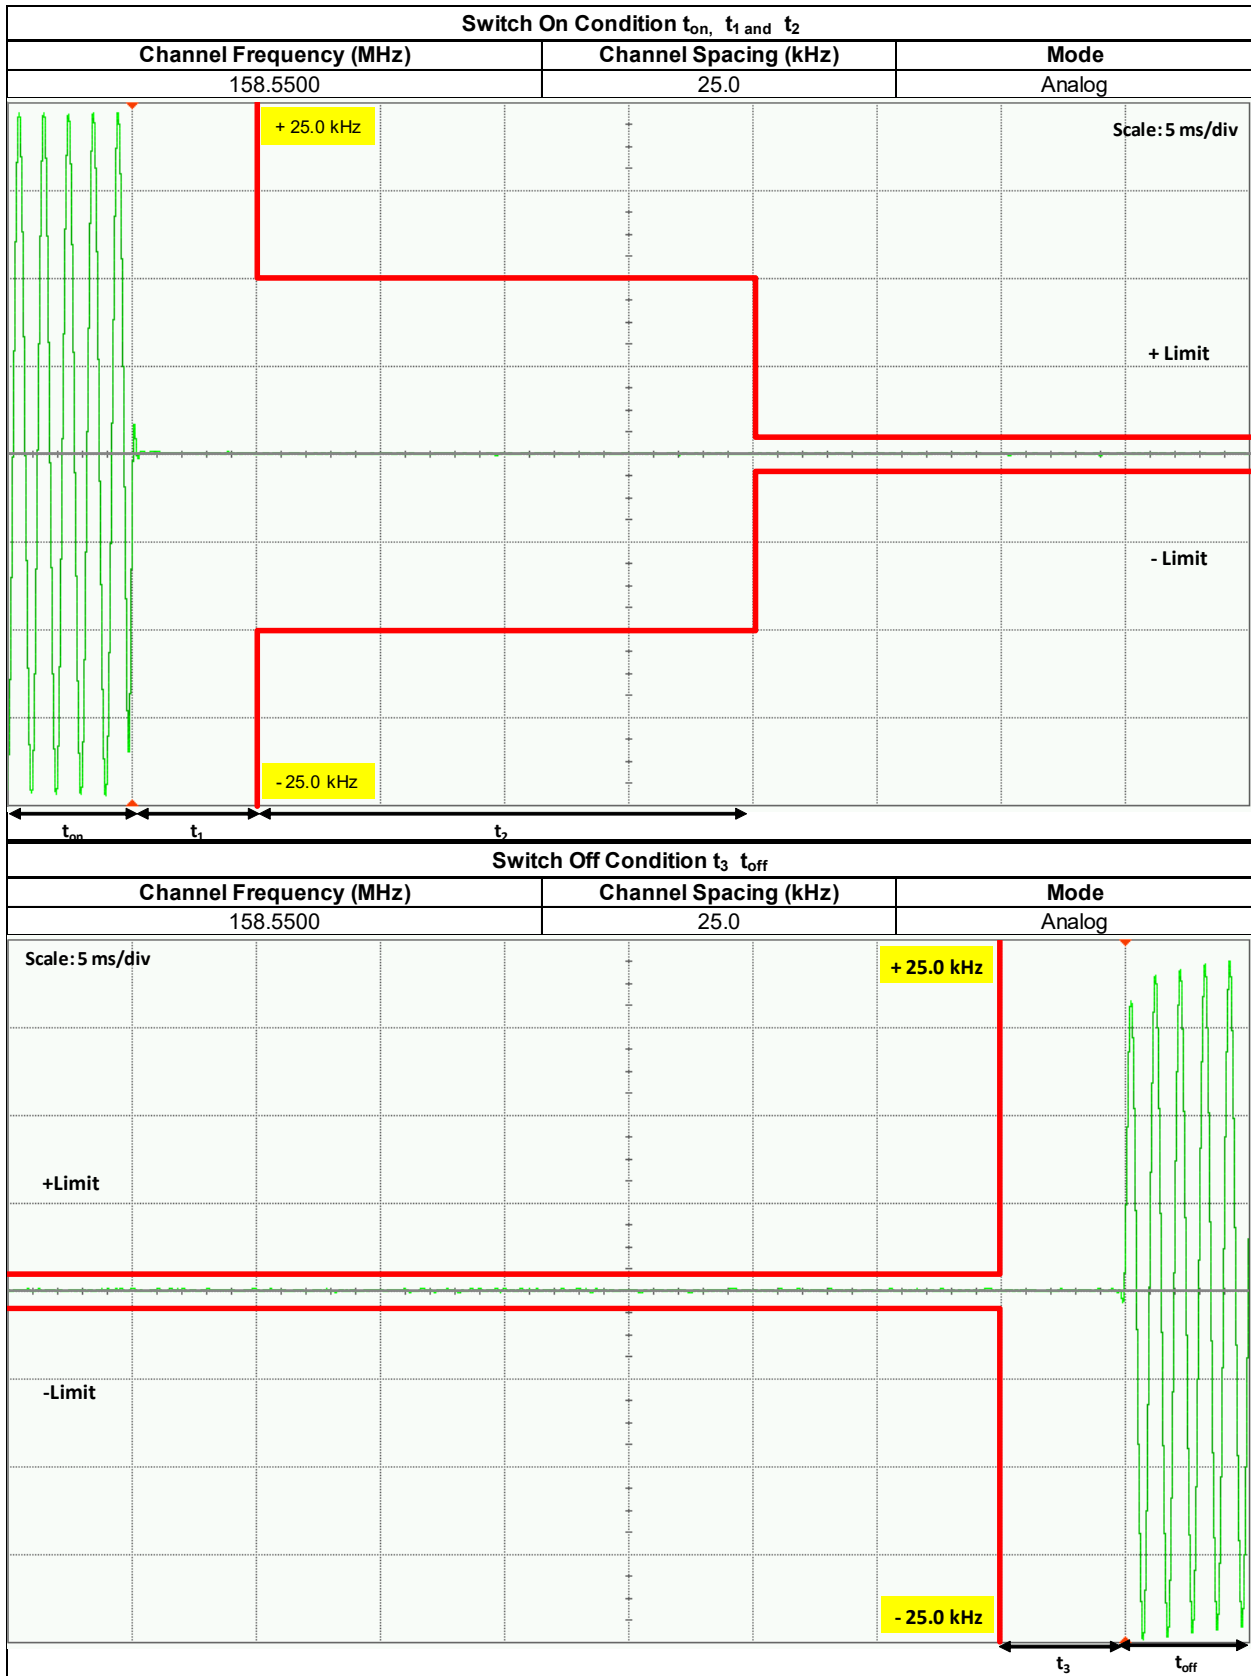

6.8.3. Test Limit

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t ₁ ⁴	±25.0 kHz	5.0 ms	10.0 ms
t ₂	±12.5 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t ₁ ⁴	±6.25 kHz	5.0 ms	10.0 ms
t ₂	±3.125 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t₁ is the time period immediately following t_{on}.

t₂ is the time period immediately following t₁.

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.


² During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

6.9. Adjacent Channel Power

6.9.1. Test Setup (Analog)

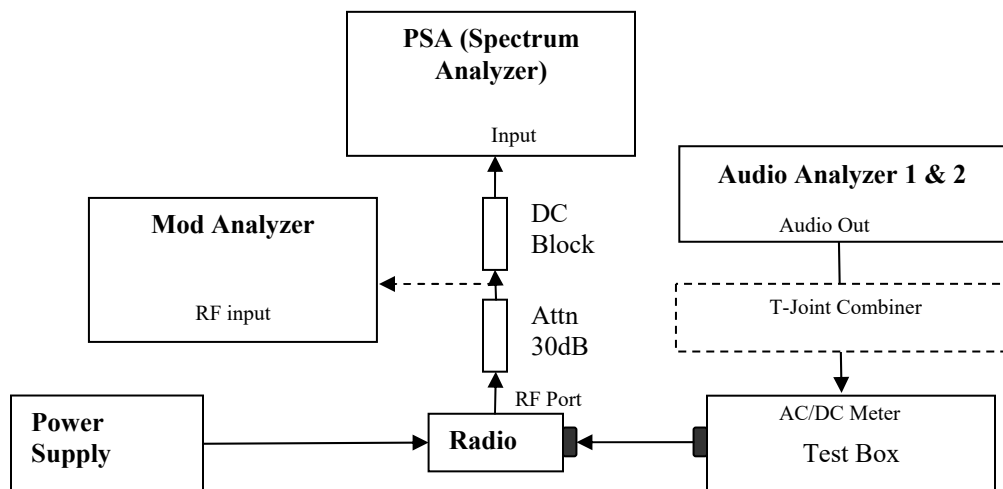


- 1) The DUT transmitter output port was connected to modulation analyzer.
- 2) Transmit the radio and turn on 1st audio analyzer with audio frequency 650Hz, 50% rated deviation, and record the amplitude value as AmpT1.
- 3) Turn off Audio analyzer 1 and turn on audio analyzer 2, set the audio frequency to 2.2 kHz and 50% deviation. Record the amplitude as AmpT2.
- 4) Turn both audio analyzers ON and up 10dB amplitude level.
- 5) Connect the output to PSA and set to assigned center frequency.
- 6) Set Span, Resolution Bandwidth and Video Bandwidth per rules part.
- 7) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.2. Test Result

Not Applicable

6.9.3. Test Setup (Digital)

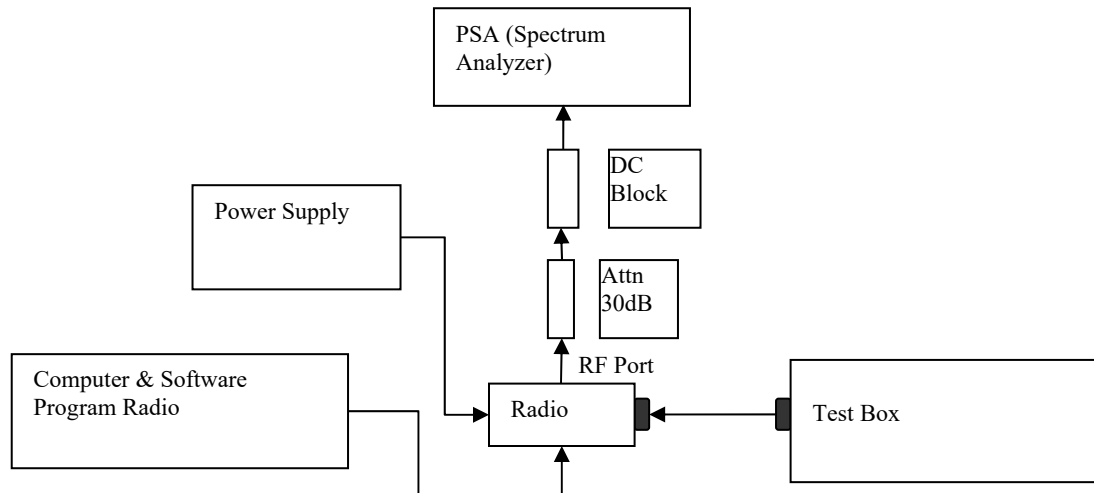

- 1) Program and set radio to operate in desire test frequency and digital mode with modulation. (4FSK, C4FM or other digital modulation form).
- 2) Prepare setup as per picture.
- 3) Turn on the ACP Measurement – Press Measure, ACP.
- 4) Set Span, Resolution Bandwidth and Video Bandwidth as per rules part.
- 5) Transmit the radio and record the Adjacent Channel Power value in dBc.

6.9.4. Test Result

Not Applicable

6.9.5. Test Limit

12.5 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.50	25.00	-60
62.50	25.00	-65
87.50	25.00	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz MOBILE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP relative (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.50	25	-60
62.50	25	-65
87.50	25	-65
150.00	100	-65
250.00	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

12.5 kHz BASE TRANSMITTER ACP REQUIREMENTS


Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350.00	100	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	1-85

25 kHz BASE TRANSMITTER ACP REQUIREMENTS

Offset from center frequency (kHz)	Measurement bandwidth (kHz)	Maximum ACP (dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100.00	-65
>400 kHz to 12 MHz	30 (s)	-80
12 MHz to paired receive band	30 (s)	-80
In the paired receive band	30 (s)	1-85

6.10. Conducted Spurious Emission


6.10.1. Test Setup

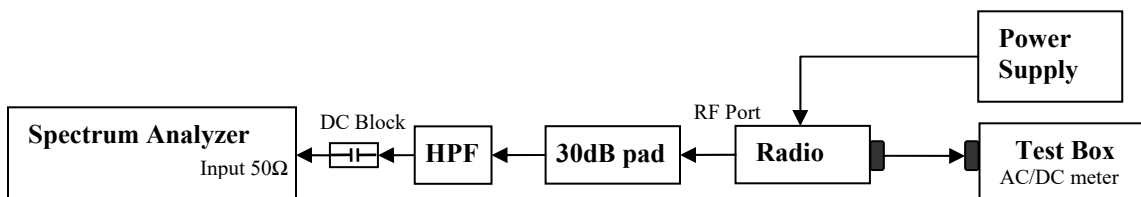

- 1) The DUT transmitter output port was connected to Spectrum Analyzer with above setup.
- 2) Program and set radio to operate in desire test frequency and mode. (Analog / digital modulation form).
- 3) Path loss for the measurement included.
- 4) Set the PSA Resolution Bandwidth as per rules part.
- 5) Set the Ref offset from the pathloss offset calibration file.
- 6) Adjust the center frequency of the spectrum analyzer for incremental coverage of the range from:
 - a. 9 KHz to $F_c - \text{Test Bandwidth}$
 - b. $F_c + \text{Test Bandwidth}$ to $2F_c - 5\text{MHz}$.
- 7) Key up the DUT, Peak Search the highest Spur and record the levels of spurious emissions
- 8) Dekey the DUT.
- 9) Turn On High Pass Filter path and Key up the DUT.
- 10) Adjust the PSA Freq for incremental coverage of range from $2F_c$ to $10F_c$
- 11) Key up the DUT and record the highest spur levels of spurious emissions.


6.10.2. Test Result (Analog)

Analog: 138.0125 MHz, 25.0kHz Channel Spacing, Max Power Not For FCC Review

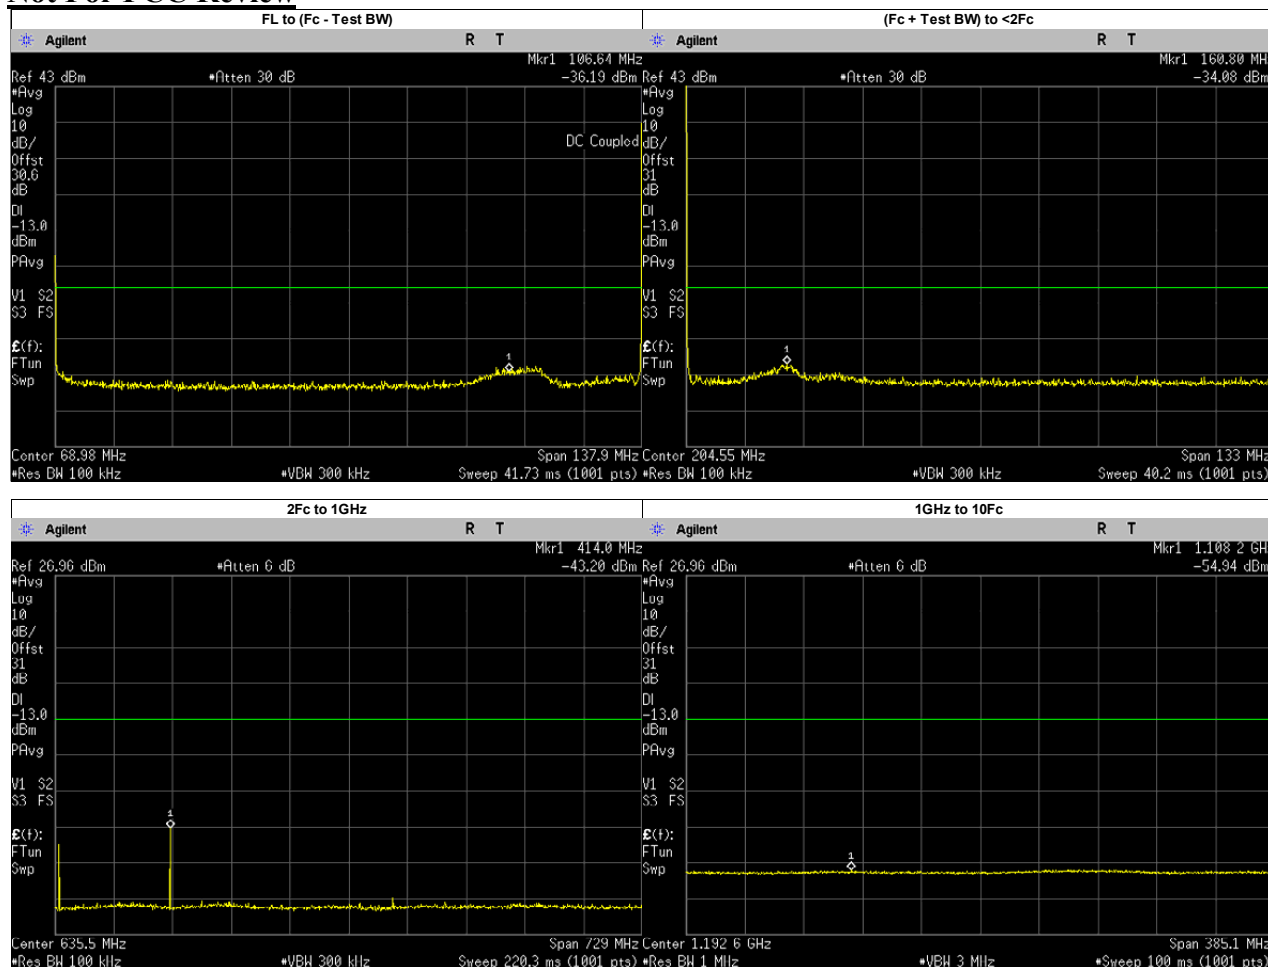


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	106.6400	-36.1900	-13.00	PASS
(Fc + Test BW) to <2Fc	160.8038	-34.0800	-13.00	PASS
2Fc to 1GHz	414.0000	-43.2000	-13.00	PASS
	276.0250	-50.4783	-13.00	PASS
	414.0375	-47.3410	-13.00	PASS
	552.0500	-64.7137	-13.00	PASS
	690.0625	-63.0683	-13.00	PASS
	828.0750	-65.0960	-13.00	PASS
	966.0875	-65.4882	-13.00	PASS
1GHz to 10Fc	1108.2200	-54.9400	-13.00	PASS
	1104.1000	-55.6448	-13.00	PASS
	1242.1120	-55.2992	-13.00	PASS
	1380.1250	-55.6661	-13.00	PASS

**Analog: 158.55 MHz, 25.0kHz Channel Spacing, Max Power
 For Part 22**

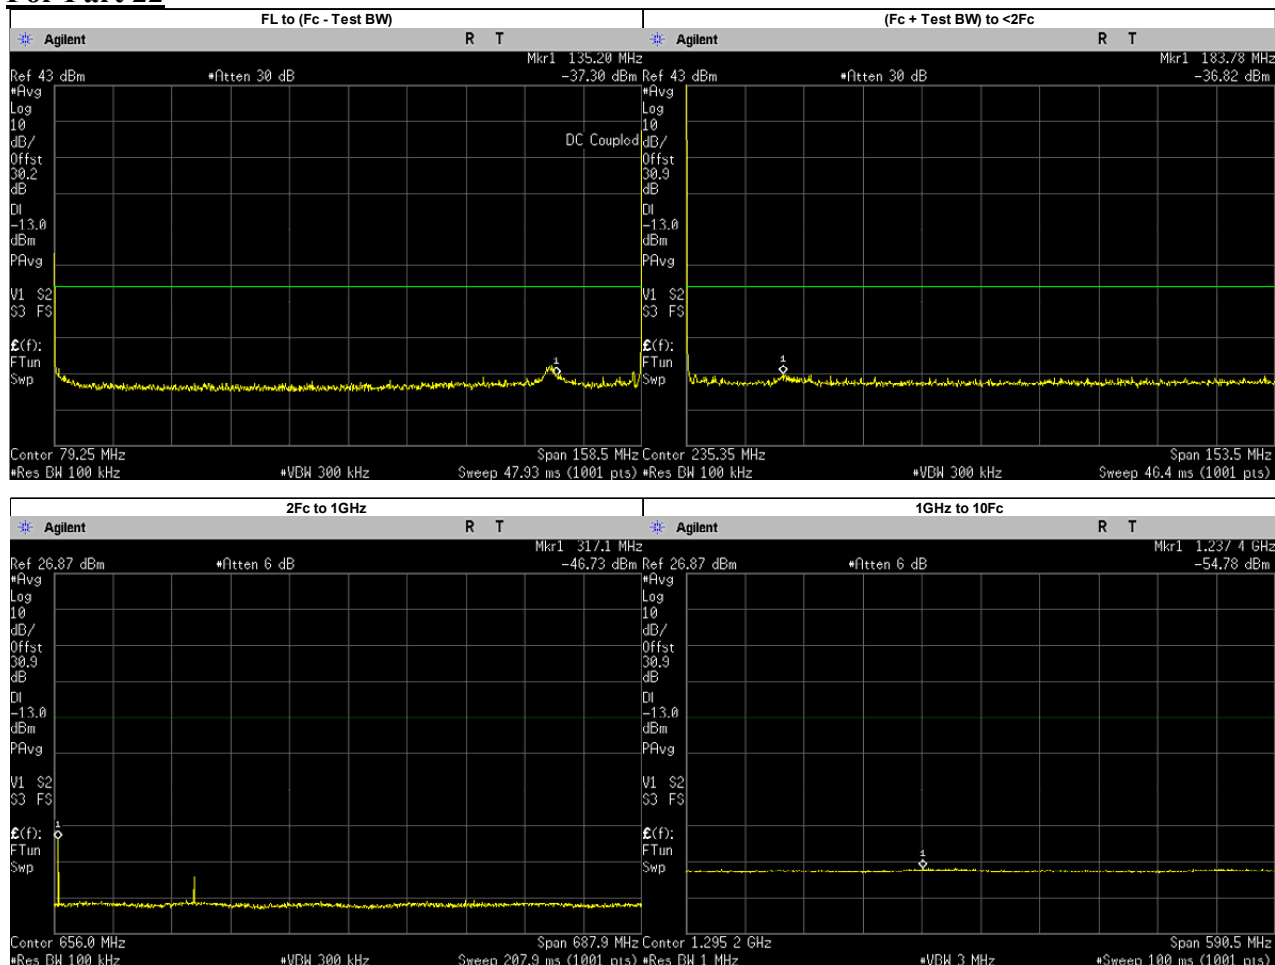


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	135.2000	-37.3030	-13.00	PASS
(Fc + Test BW) to <2Fc	183.7787	-36.8200	-13.00	PASS
2Fc to 1GHz	317.1000	-46.7300	-13.00	PASS
	317.1000	-51.7375	-13.00	PASS
	475.6500	-58.8204	-13.00	PASS
	634.2000	-64.8619	-13.00	PASS
	792.7500	-64.1831	-13.00	PASS
	951.3000	-65.4820	-13.00	PASS
1GHz to 10Fc	1237.4000	-54.7800	-13.00	PASS
	1109.8500	-55.4222	-13.00	PASS
	1268.4000	-55.3436	-13.00	PASS
	1426.9500	-55.6836	-13.00	PASS
	1585.5000	-55.5614	-13.00	PASS

**Analog: 158.55 MHz, 25.0kHz Channel Spacing, Low Power
 For Part 22**

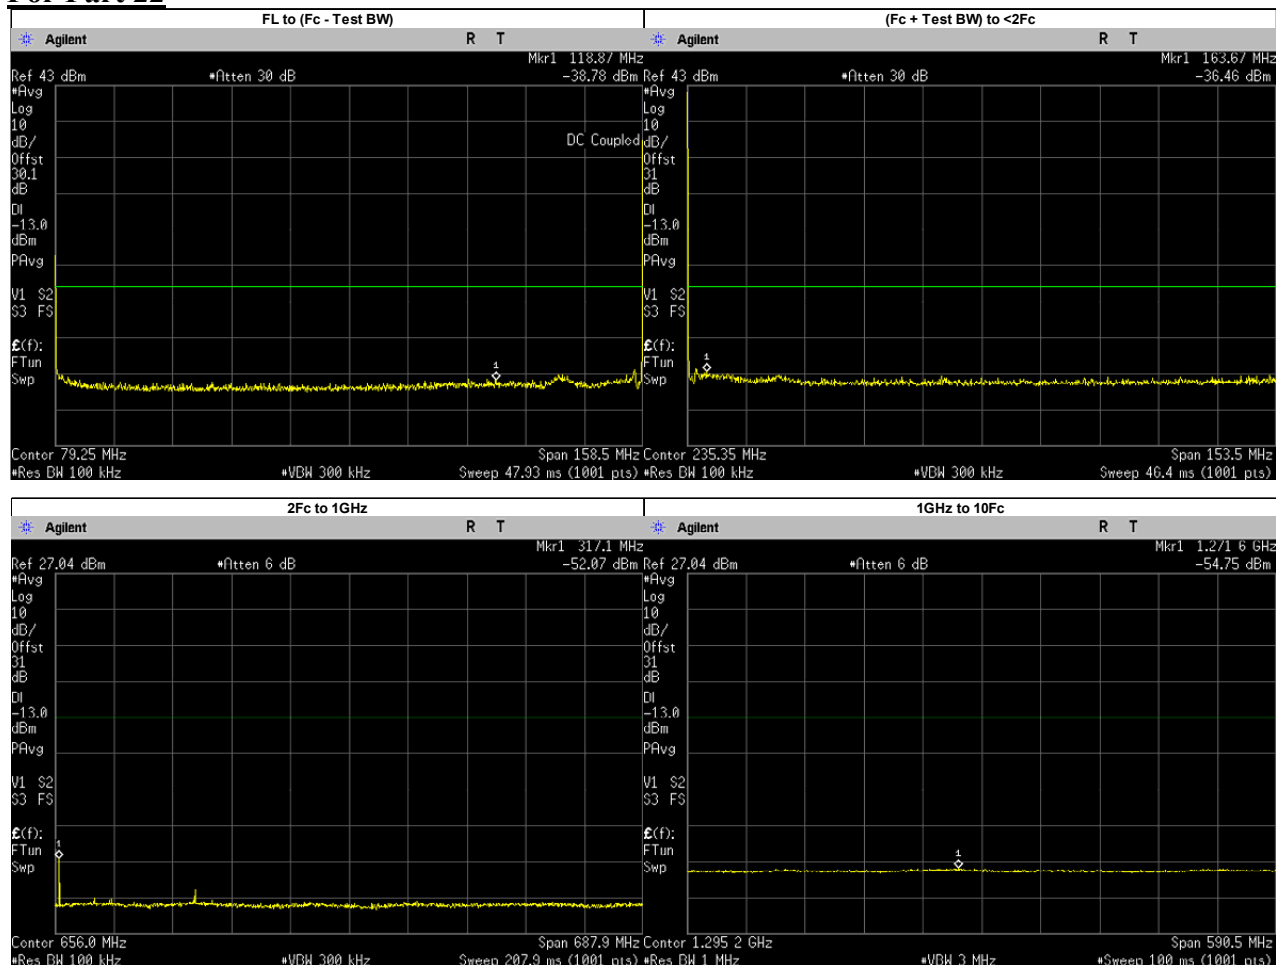


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	118.8700	-38.7850	-13.00	PASS
(Fc + Test BW) to <2Fc	163.6709	-36.4600	-13.00	PASS
2Fc to 1GHz	358.1893	-63.1200	-13.00	PASS
	317.1000	-55.6765	-13.00	PASS
	475.6500	-61.4386	-13.00	PASS
	634.2000	-64.8936	-13.00	PASS
	792.7500	-64.9817	-13.00	PASS
	951.3000	-65.3752	-13.00	PASS
1GHz to 10Fc	1271.6300	-54.7500	-13.00	PASS
	1109.8500	-55.3429	-13.00	PASS
	1268.4000	-55.0195	-13.00	PASS
	1426.9500	-55.6658	-13.00	PASS
	1585.5000	-55.4440	-13.00	PASS

Analog: 161.7 MHz, 25.0kHz Channel Spacing, Max Power
Part 74

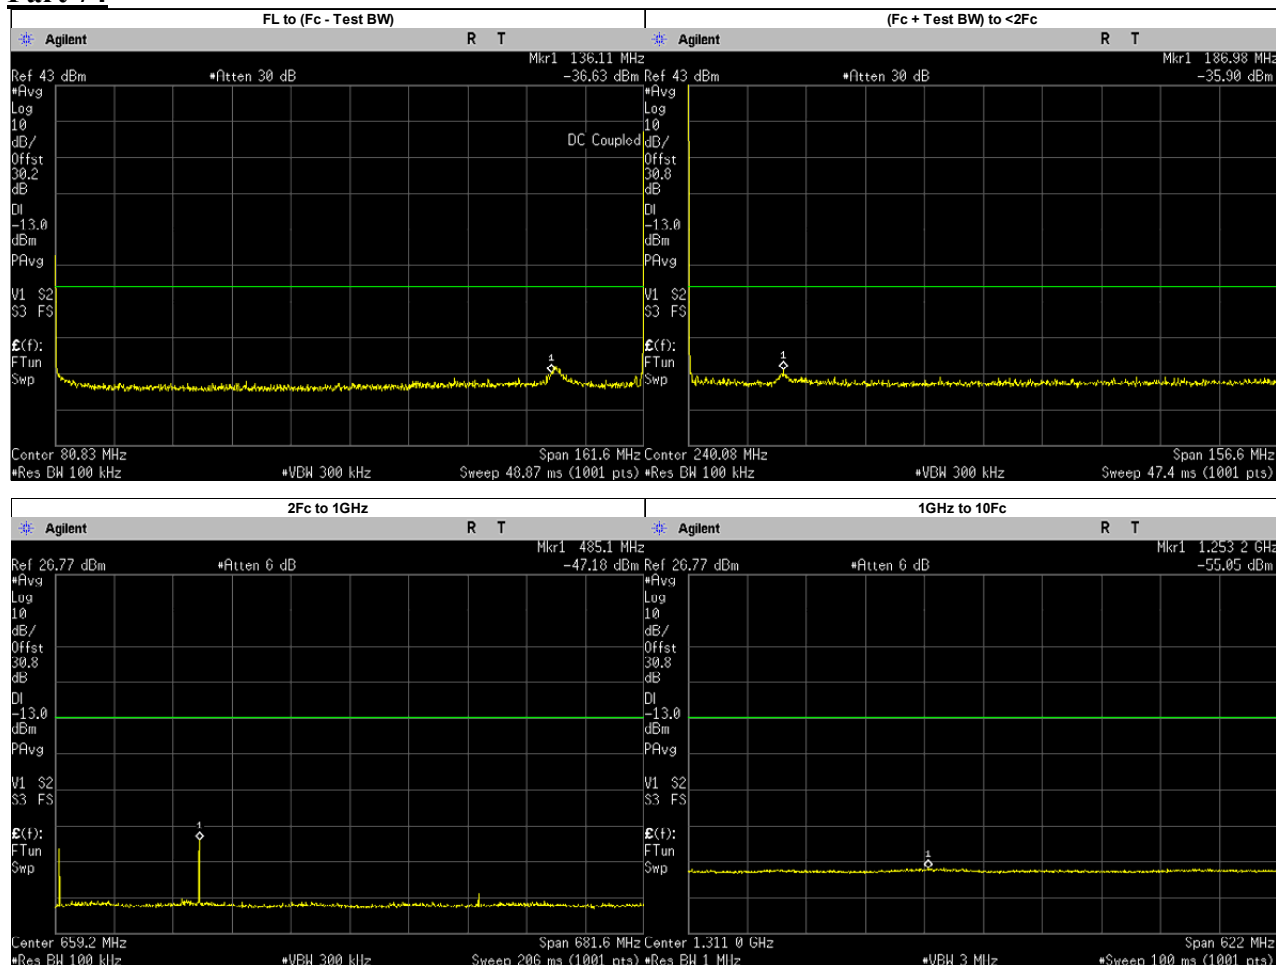


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	136.1100	-36.6300	-13.00	PASS
(Fc + Test BW) to <2Fc	186.9754	-35.9000	-13.00	PASS
2Fc to 1GHz	484.7104	-52.5900	-13.00	PASS
	323.4000	-54.6610	-13.00	PASS
	485.1000	-49.4962	-13.00	PASS
	646.8000	-65.6238	-13.00	PASS
	808.5000	-62.0952	-13.00	PASS
	970.2000	-65.7238	-13.00	PASS
1GHz to 10Fc	1253.1540	-55.0500	-13.00	PASS
	1131.9000	-55.9336	-13.00	PASS
	1293.6000	-55.7254	-13.00	PASS
	1455.3000	-55.8103	-13.00	PASS
	1617.0000	-55.6226	-13.00	PASS

Analog: 161.7 MHz, 25.0kHz Channel Spacing, Low Power
Part 74

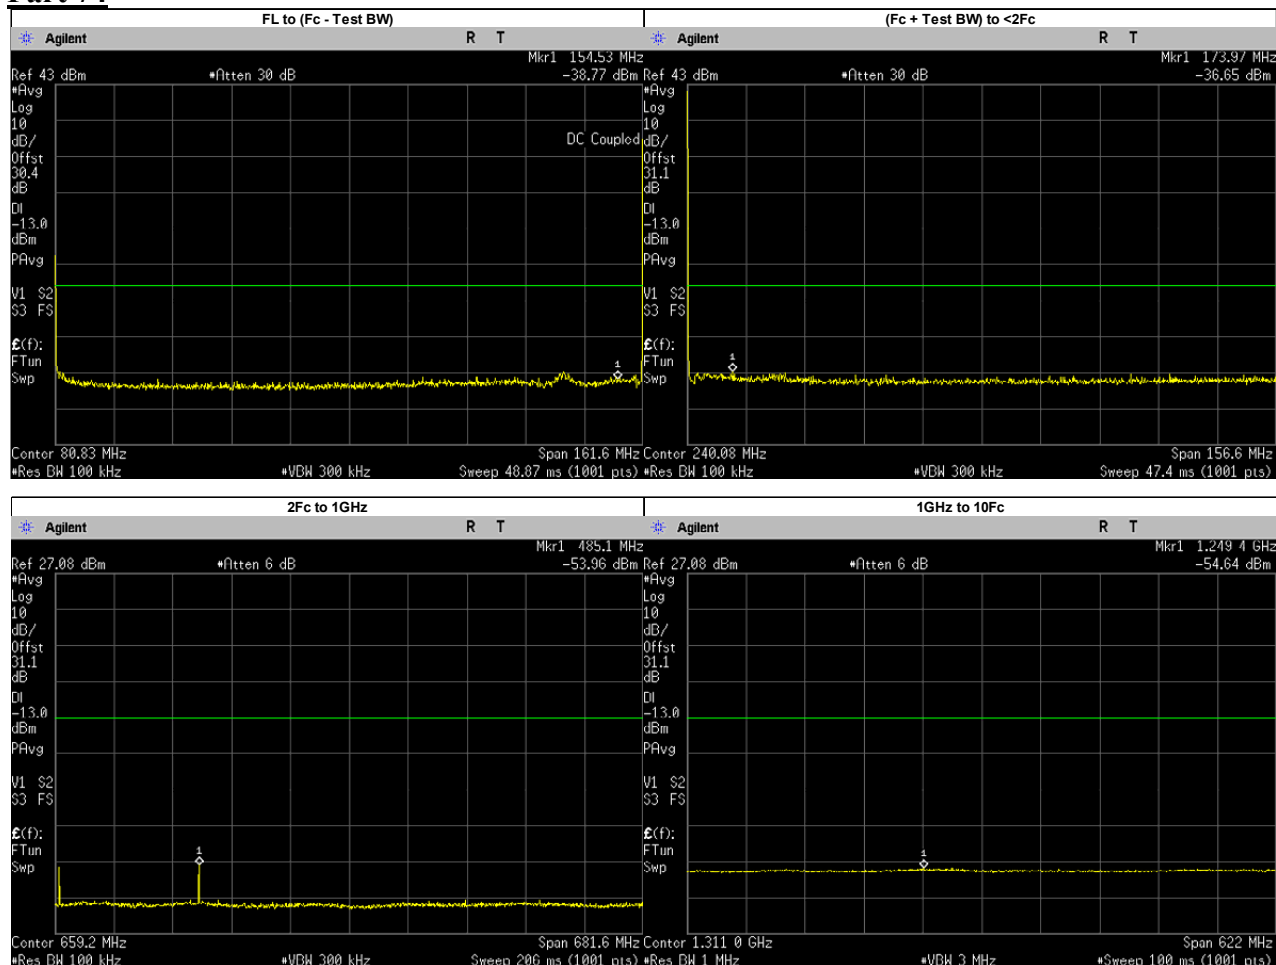

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	154.5300	-38.7820	-13.00	PASS
(Fc + Test BW) to <2Fc	173.9739	-36.6500	-13.00	PASS
2Fc to 1GHz	484.7104	-58.8800	-13.00	PASS
	323.4000	-57.8426	-13.00	PASS
	485.1000	-56.0692	-13.00	PASS
	646.8000	-65.2745	-13.00	PASS
	808.5000	-64.2755	-13.00	PASS
	970.2000	-65.2002	-13.00	PASS
1GHz to 10Fc	1249.4220	-54.6400	-13.00	PASS
	1131.9000	-55.4976	-13.00	PASS
	1293.6000	-55.1056	-13.00	PASS
	1455.3000	-55.6192	-13.00	PASS
	1617.0000	-55.2927	-13.00	PASS


Analog: 173.9875MHz, 25.0kHz Channel Spacing, Max Power
Not For FCC Review

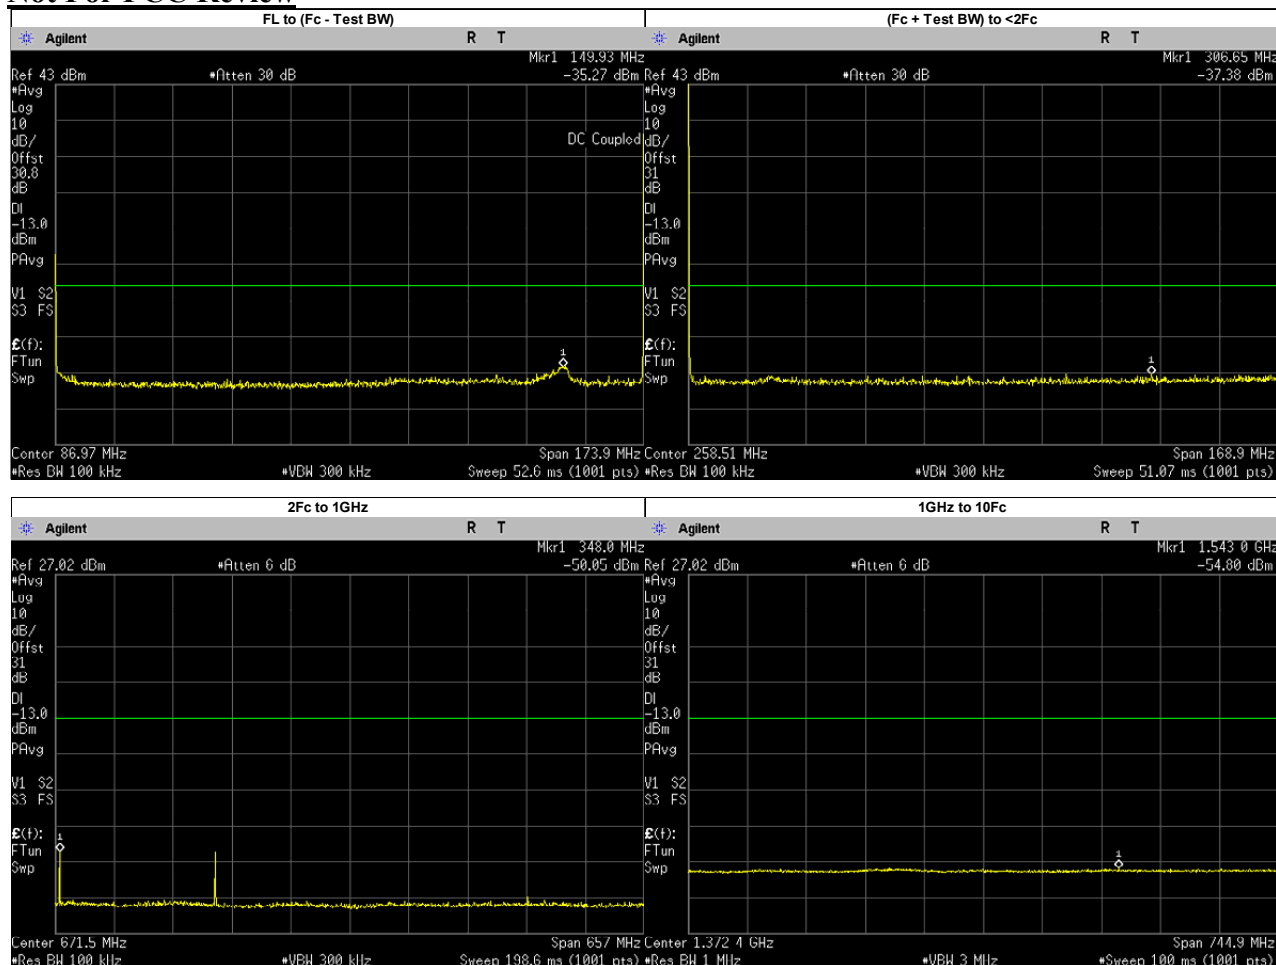

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	149.9300	-35.2730	-13.00	PASS
(Fc + Test BW) to <2Fc	306.6546	-37.3800	-13.00	PASS
2Fc to 1GHz	347.5742	-58.9800	-13.00	PASS
	347.9750	-53.5315	-13.00	PASS
	521.9625	-54.4891	-13.00	PASS
	695.9500	-65.4030	-13.00	PASS
	869.9375	-62.5915	-13.00	PASS
1GHz to 10Fc	1543.0140	-54.8000	-13.00	PASS
	1043.9250	-55.9077	-13.00	PASS
	1217.9120	-55.3529	-13.00	PASS
	1391.9000	-55.5185	-13.00	PASS
	1565.8880	-55.2063	-13.00	PASS
	1739.8750	-55.4449	-13.00	PASS


6.10.3. Test Result (Digital)

**4FSK: 138.0125 MHz, 12.5 kHz Channel Spacing, Max Power
 RSS 119**

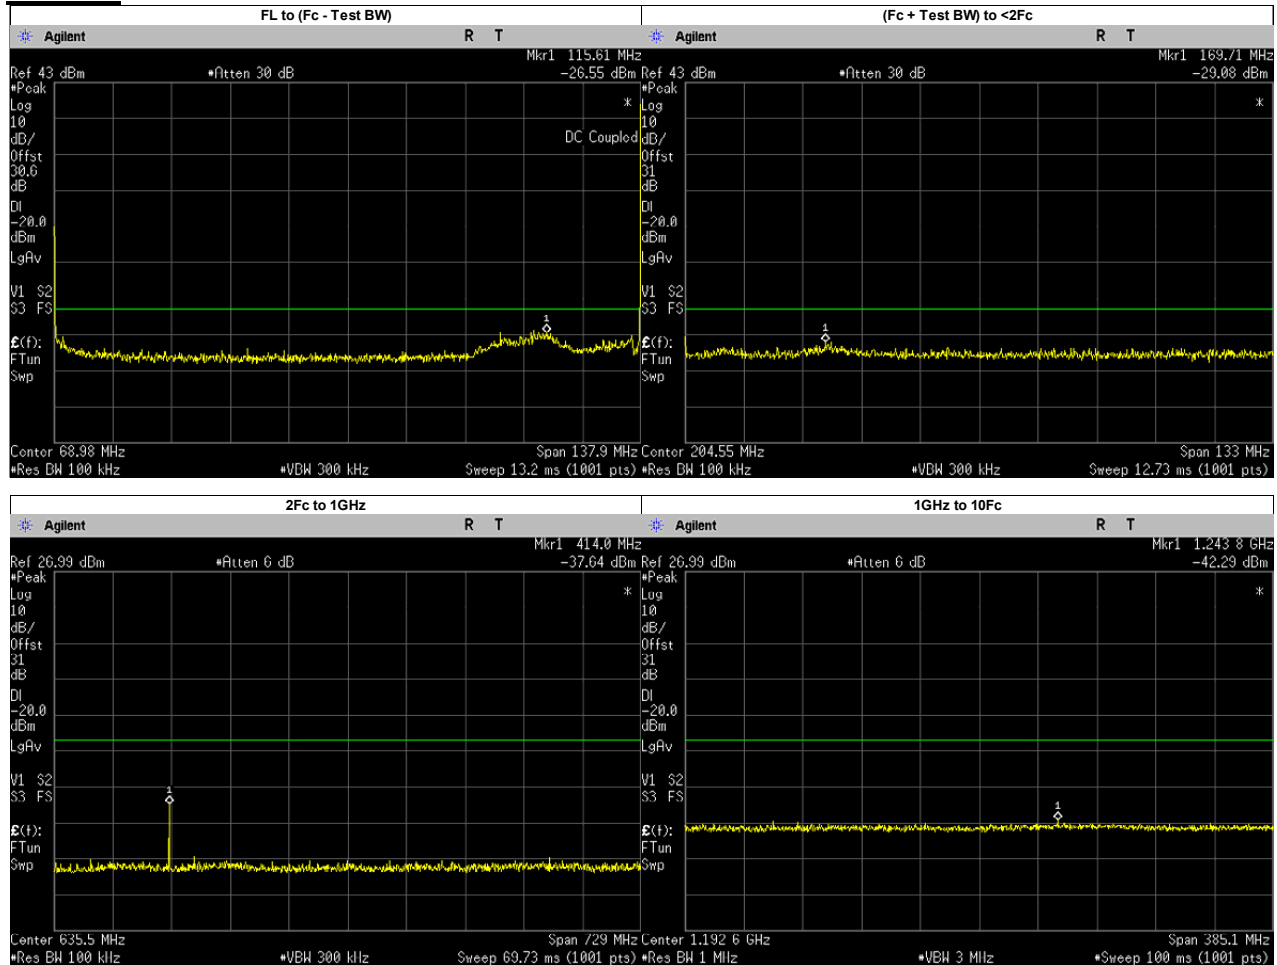


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	115.6100	-26.5460	-20.00	PASS
(Fc + Test BW) to <2Fc	169.7119	-29.0800	-20.00	PASS
2Fc to 1GHz	414.0000	-37.6400	-20.00	PASS
	276.0250	-55.6966	-20.00	PASS
	414.0375	-40.8641	-20.00	PASS
	552.0500	-55.6059	-20.00	PASS
	690.0625	-55.5112	-20.00	PASS
	828.0750	-55.2984	-20.00	PASS
	966.0875	-55.0813	-20.00	PASS
1GHz to 10Fc	1243.7840	-42.2900	-20.00	PASS
	1104.1000	-44.4107	-20.00	PASS
	1242.1120	-43.6735	-20.00	PASS
	1380.1250	-44.8342	-20.00	PASS

**4FSK: 158.55 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 22, 90, RSS 119**

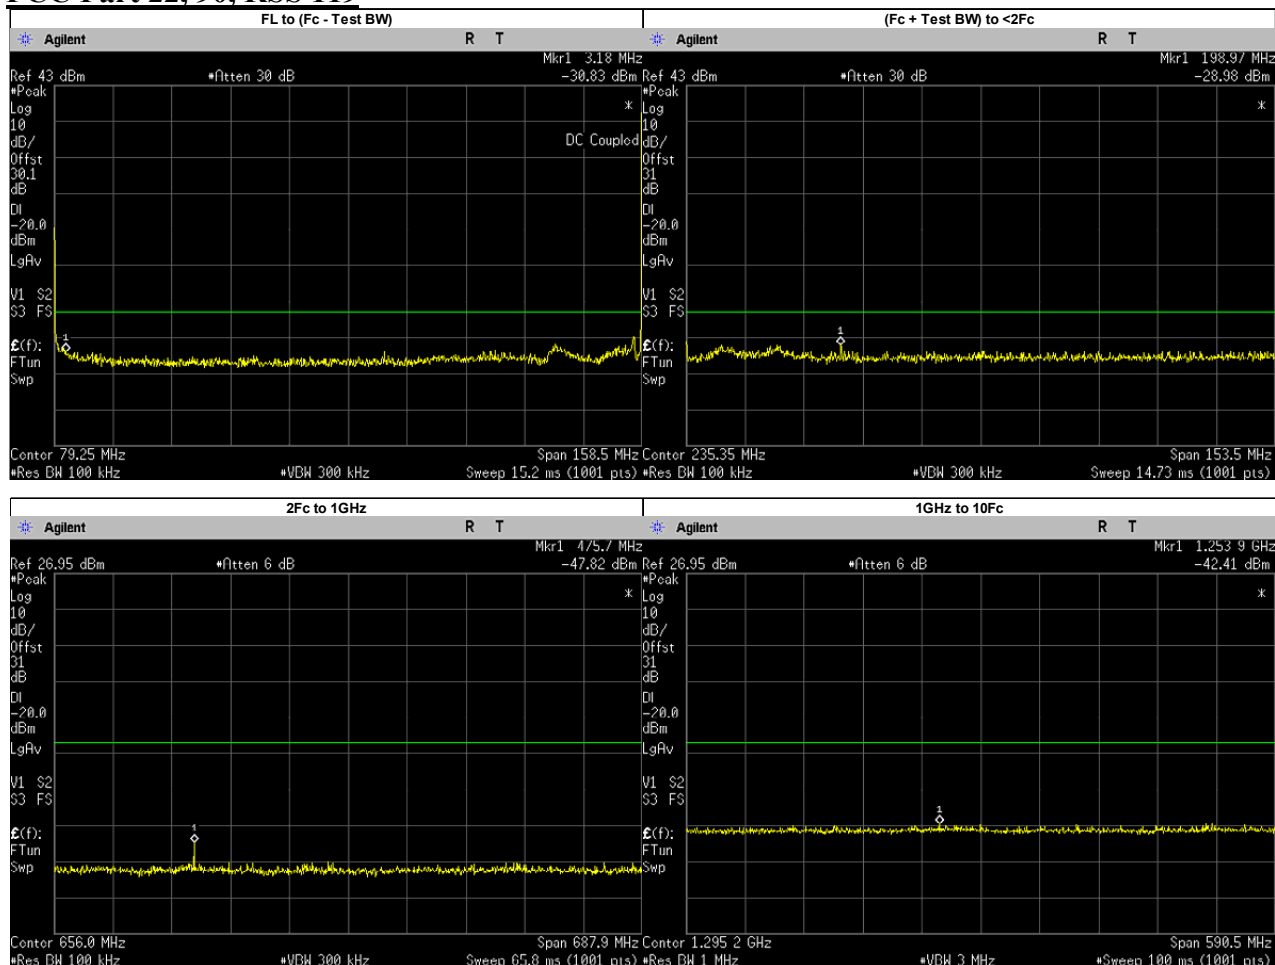


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	3.1800	-30.8280	-20.00	PASS
(Fc + Test BW) to <2Fc	198.9746	-28.9800	-20.00	PASS
2Fc to 1GHz	475.7000	-47.8200	-20.00	PASS
	317.1000	-55.8710	-20.00	PASS
	475.6500	-49.6297	-20.00	PASS
	634.2000	-55.2681	-20.00	PASS
	792.7500	-55.3691	-20.00	PASS
	951.3000	-55.9716	-20.00	PASS
1GHz to 10Fc	1253.9150	-42.4100	-20.00	PASS
	1109.8500	-44.5372	-20.00	PASS
	1268.4000	-44.4156	-20.00	PASS
	1426.9500	-44.5398	-20.00	PASS
	1585.5000	-44.7132	-20.00	PASS

**4FSK: 158.55 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 22,90,RSS 119**

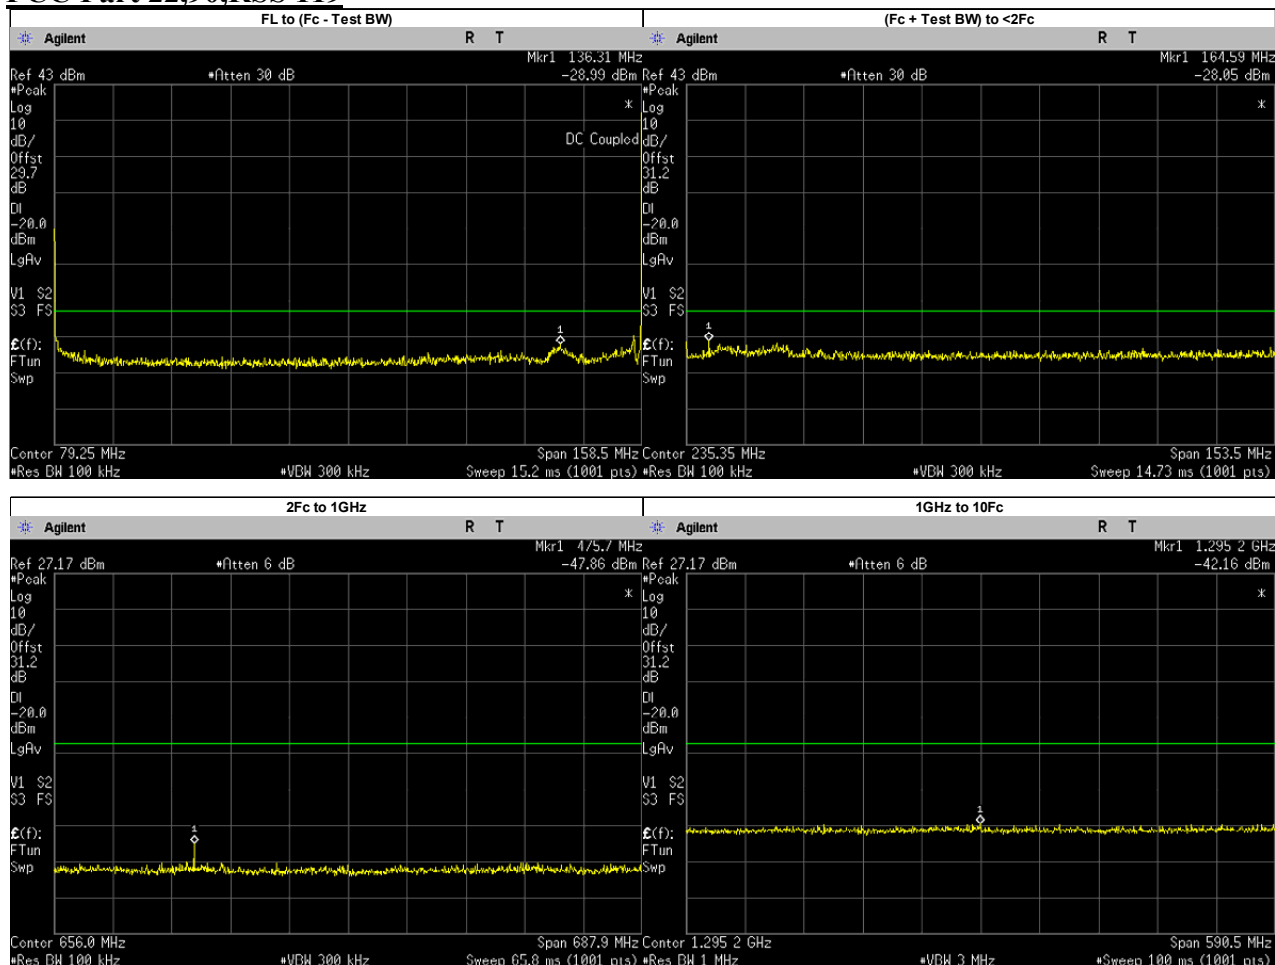


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	136.3100	-28.9870	-20.00	PASS
(Fc + Test BW) to <2Fc	164.5919	-28.0500	-20.00	PASS
2Fc to 1GHz	467.5654	-52.8200	-20.00	PASS
	317.1000	-54.6899	-20.00	PASS
	475.6500	-49.7634	-20.00	PASS
	634.2000	-55.1599	-20.00	PASS
	792.7500	-56.0619	-20.00	PASS
	951.3000	-55.1480	-20.00	PASS
1GHz to 10Fc	1295.2500	-42.1600	-20.00	PASS
	1109.8500	-44.0276	-20.00	PASS
	1268.4000	-43.8080	-20.00	PASS
	1426.9500	-43.4684	-20.00	PASS
	1585.5000	-44.1761	-20.00	PASS

**4FSK: 161.7 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 74, 90,RSS 119**

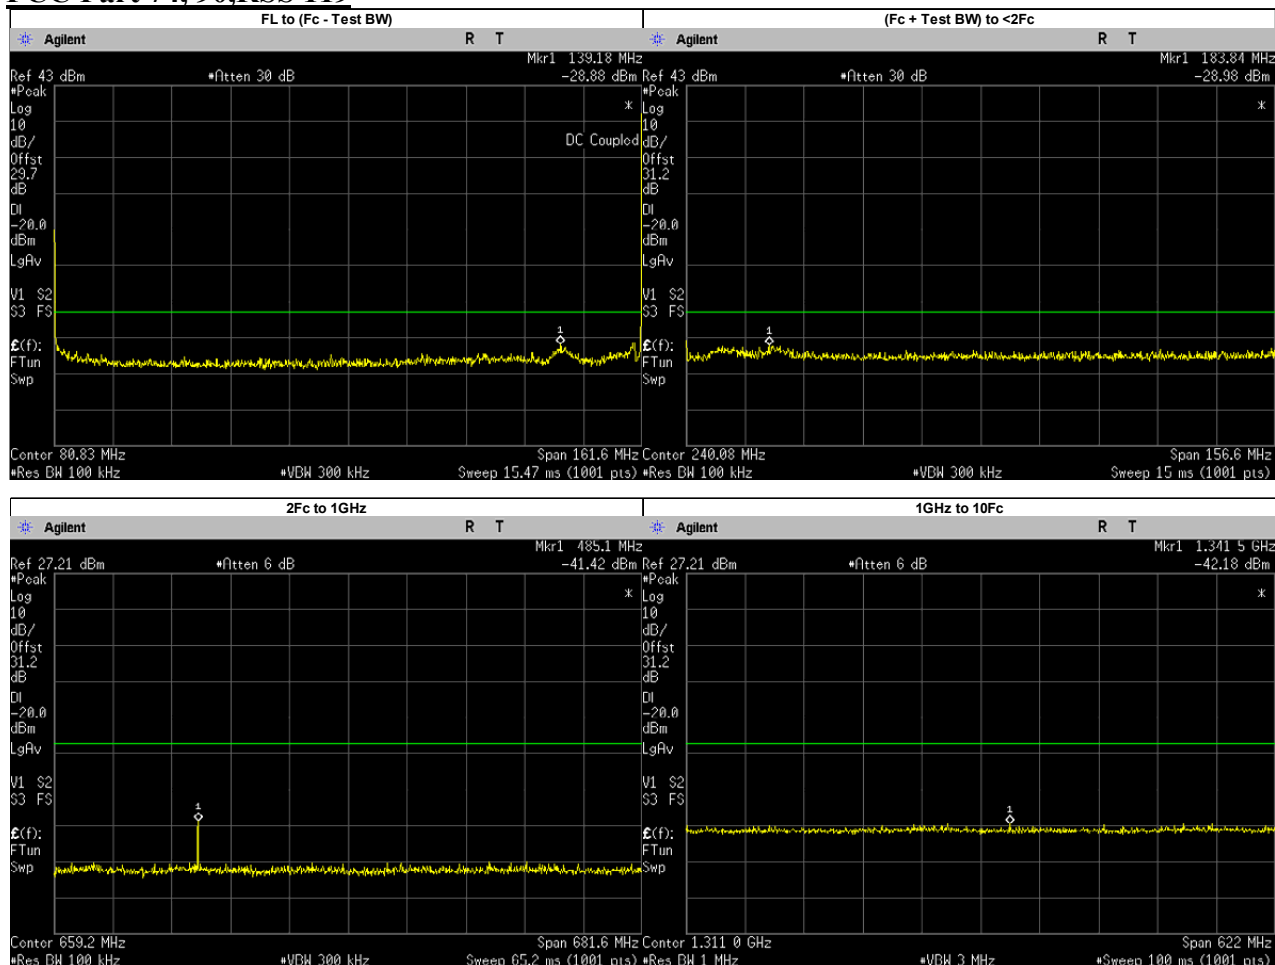


Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	139.1800	-28.8770	-20.00	PASS
(Fc + Test BW) to <2Fc	183.8425	-28.9800	-20.00	PASS
2Fc to 1GHz	485.1000	-41.4200	-20.00	PASS
	323.4000	-55.7318	-20.00	PASS
	485.1000	-42.6414	-20.00	PASS
	646.8000	-55.1992	-20.00	PASS
	808.5000	-55.4063	-20.00	PASS
	970.2000	-54.6223	-20.00	PASS
1GHz to 10Fc	1341.4780	-42.1800	-20.00	PASS
	1131.9000	-44.3073	-20.00	PASS
	1293.6000	-43.5821	-20.00	PASS
	1455.3000	-44.2296	-20.00	PASS
	1617.0000	-43.8468	-20.00	PASS

**4FSK: 161.7 MHz, 12.5 kHz Channel Spacing, Low Power
 FCC Part 74, 90, RSS 119**

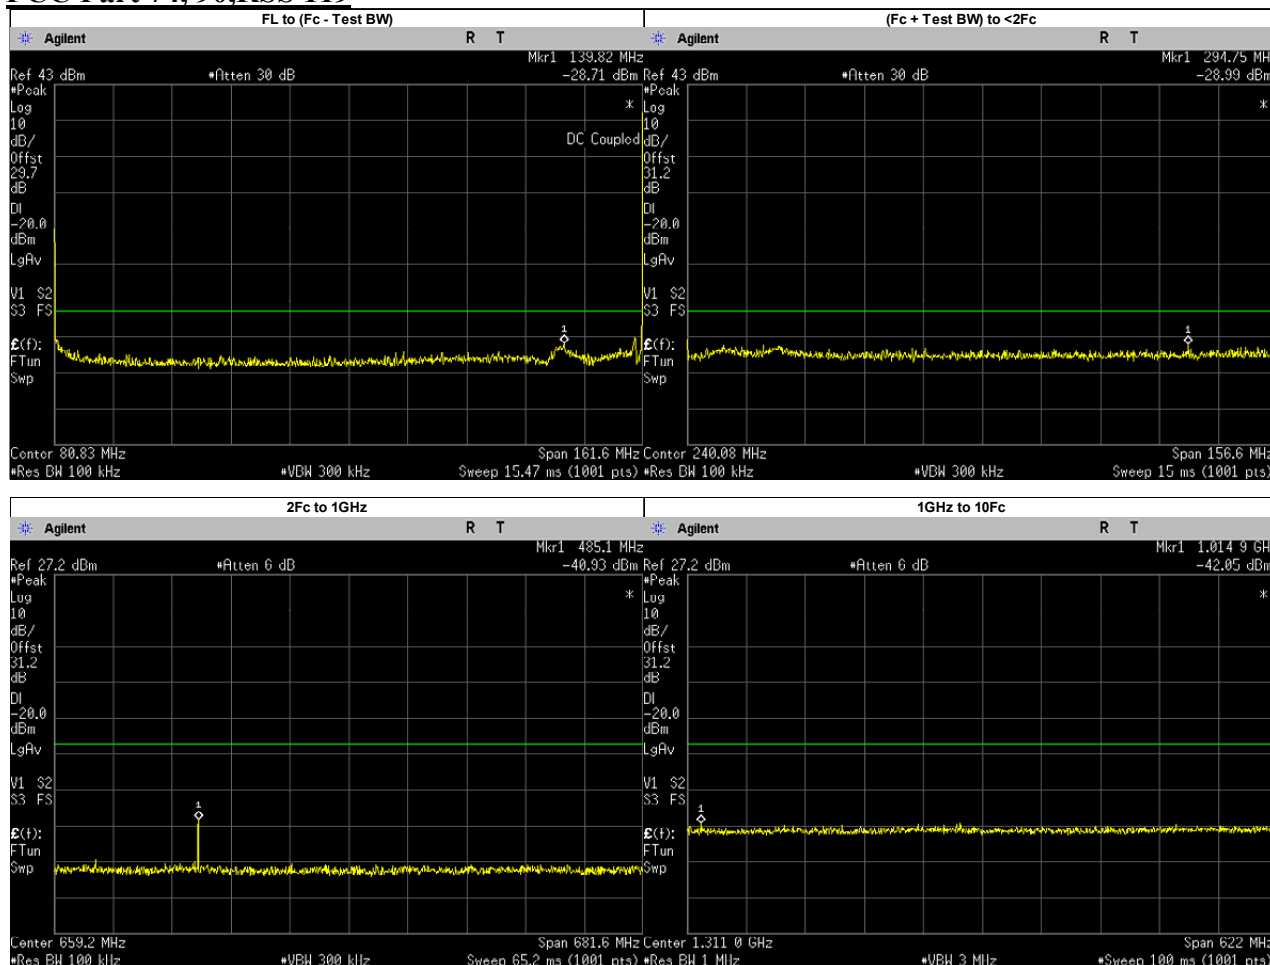

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	139.8200	-28.7060	-20.00	PASS
(Fc + Test BW) to <2Fc	294.7467	-28.9900	-20.00	PASS
2Fc to 1GHz	484.7104	-43.3300	-20.00	PASS
	323.4000	-53.9107	-20.00	PASS
	485.1000	-41.9552	-20.00	PASS
	646.8000	-55.3236	-20.00	PASS
	808.5000	-55.6023	-20.00	PASS
	970.2000	-54.3960	-20.00	PASS
1GHz to 10Fc	1014.9280	-42.0500	-20.00	PASS
	1131.9000	-44.6143	-20.00	PASS
	1293.6000	-43.5599	-20.00	PASS
	1455.3000	-43.4798	-20.00	PASS
	1617.0000	-43.7591	-20.00	PASS

**4FSK: 173.3875 MHz, 12.5 kHz Channel Spacing, Max Power
 FCC Part 90,RSS 119**

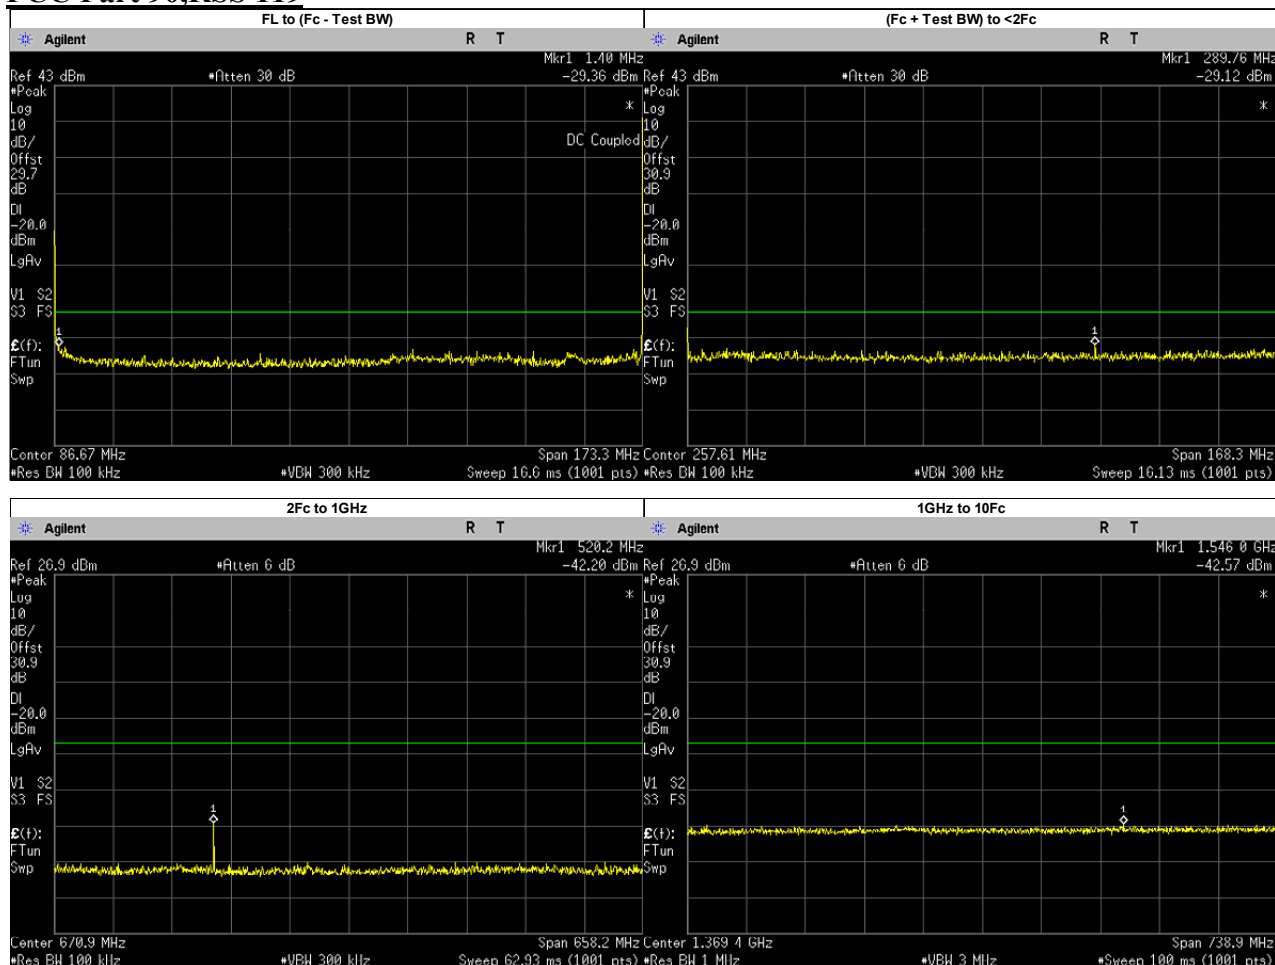

Frequency Range	Highest Spur Frequency (MHz)	Spurious Level (dBm)	Failing Limit (dBm)	Results
FL to (Fc - Test BW)	1.4000	-29.3640	-20.00	PASS
(Fc + Test BW) to <2Fc	289.7605	-29.1200	-20.00	PASS
2Fc to 1GHz	520.2000	-42.2000	-20.00	PASS
	346.7750	-55.5220	-20.00	PASS
	520.1625	-42.3657	-20.00	PASS
	693.5500	-55.3839	-20.00	PASS
	866.9375	-55.2033	-20.00	PASS
1GHz to 10Fc	1546.0290	-42.5700	-20.00	PASS
	1040.3250	-44.3245	-20.00	PASS
	1213.7130	-44.2776	-20.00	PASS
	1387.1000	-44.5944	-20.00	PASS
	1560.4870	-43.7340	-20.00	PASS
	1733.8750	-44.0457	-20.00	PASS

6.10.4. Test Limit


Table below summarized the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.11. Radiated Spurious Emission

6.11.1. Test Setup

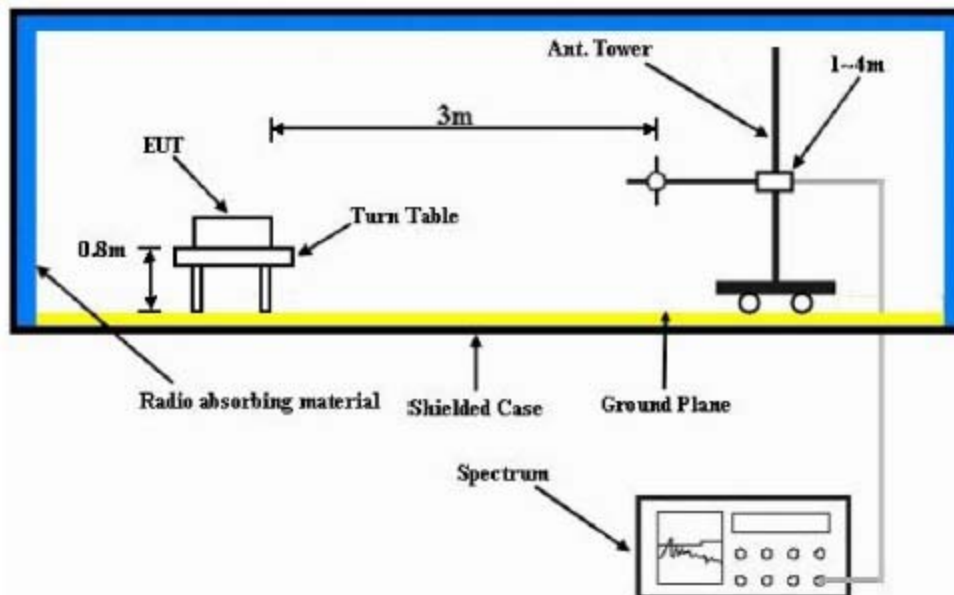


- 1) The Resolution Bandwidth for scanning Radiated Emission below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector mode is positive peak.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $F_c < 1\text{GHz}$) or 1.5m height (for $F_c > 1\text{GHz}$) of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 4) Final Radiated Spurious Emission = “Read Value” + Measured substitution value.

6.11.2. Test Result (Analog)

Model Number: AAM28JQN9RA1AN **SAC Transmitter Radiated Emission:** **SR:22121-EMC-00003**
Battery Part No: NA **S/N: 511TWP7151**
138.012500 MHz **Accy Part No: 3921-HKN4192B-1, RMN5127C-C1**
25 kHz **Test Mode: TX Analog** **54.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
276.0250	-13.0000	-92.1218 **	-90.8430 **
414.0375	-13.0000	-87.9293 **	-87.8477 **
552.0500	-13.0000	-81.1318 **	-81.1213 **
690.0625	-13.0000	-80.9574 **	-82.5349 **
828.0750	-13.0000	-80.5813 **	-79.7066 **
966.0875	-13.0000	-78.7712 **	-78.4287 **
1104.1000	-13.0000	-61.7164 **	-62.1324 **
1242.1125	-13.0000	-61.8705 **	-60.8163 **
1380.1250	-13.0000	-59.9476 **	-60.1677 **

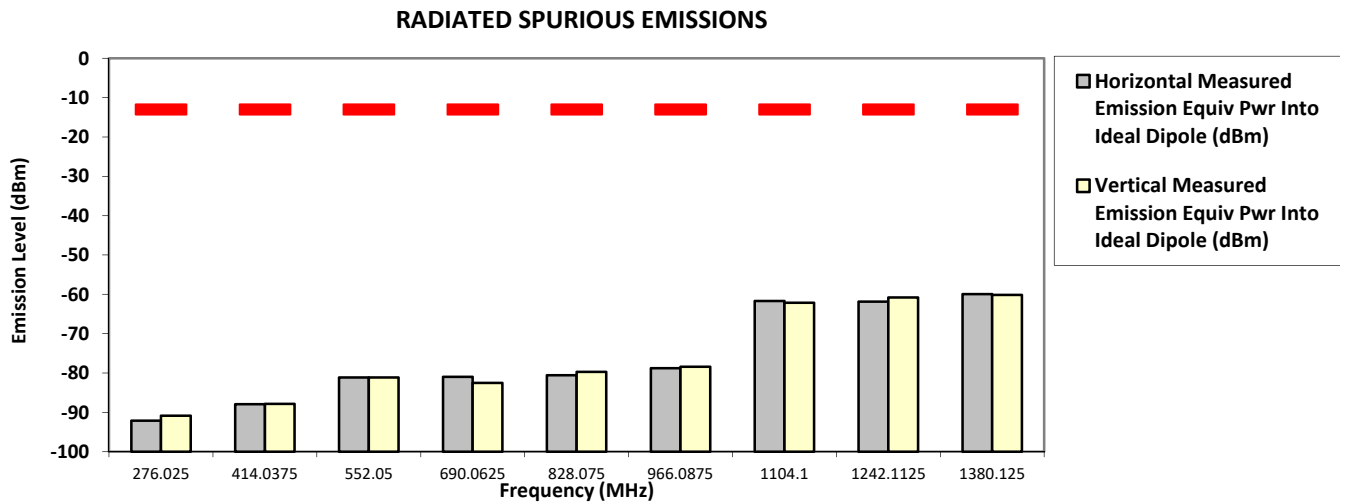

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1


Test Mode: TX Analog
 25 kHz

138.012500 MHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
276.0250	-13.0000	-90.1920 **	-92.1122 **
414.0375	-13.0000	-87.5877 **	-87.1603 **
552.0500	-13.0000	-81.6955 **	-82.3272 **
690.0625	-13.0000	-83.2745 **	-82.2704 **
828.0750	-13.0000	-80.8430 **	-79.4484 **
966.0875	-13.0000	-79.7818 **	-78.9487 **
1104.1000	-13.0000	-62.8214 **	-62.7211 **
1242.1125	-13.0000	-60.8731 **	-61.5083 **
1380.1250	-13.0000	-61.0935 **	-61.7906 **

RADIATED SPURIOUS EMISSIONS

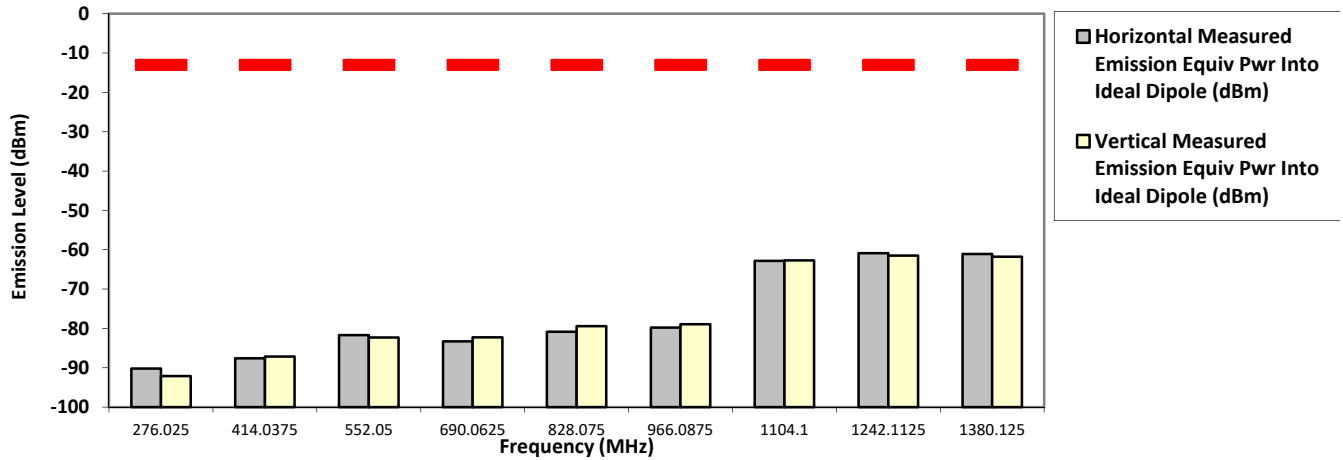

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

Test Mode: TX Analog


158.550000 MHz

25 kHz

54.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-90.9792 **	-91.6270 **
475.6500	-13.0000	-85.4590 **	-84.3233 **
634.2000	-13.0000	-81.1608 **	-81.8664 **
792.7500	-13.0000	-81.2677 **	-80.3156 **
951.3000	-13.0000	-79.9475 **	-79.9702 **
1109.8500	-13.0000	-60.9982 **	-61.9666 **
1268.4000	-13.0000	-60.7131 **	-61.8857 **
1426.9500	-13.0000	-60.2963 **	-61.7129 **
1585.5000	-13.0000	-60.5039 **	-59.7855 **

RADIATED SPURIOUS EMISSIONS

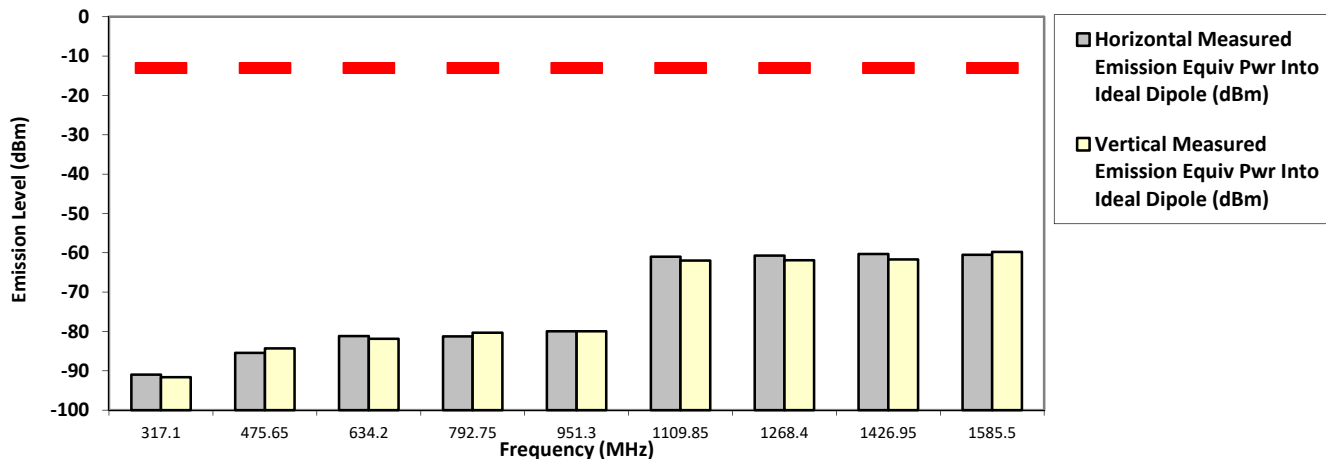

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151
 Accy Part No: 3921-HKN4192B-1, RMN5127C-C1
 Test Mode: TX Analog
 25 kHz


SR:22121-EMC-00003

158.550000 MHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
317.1000	-13.0000	-91.3117 **	-91.4364 **
475.6500	-13.0000	-84.9132 **	-84.6336 **
634.2000	-13.0000	-81.8208 **	-82.3734 **
792.7500	-13.0000	-81.4972 **	-81.8740 **
951.3000	-13.0000	-77.4214 **	-79.6395 **
1109.8500	-13.0000	-61.5508 **	-62.5335 **
1268.4000	-13.0000	-61.6442 **	-61.5553 **
1426.9500	-13.0000	-61.0026 **	-61.5015 **
1585.5000	-13.0000	-59.0107 **	-61.0097 **

RADIATED SPURIOUS EMISSIONS

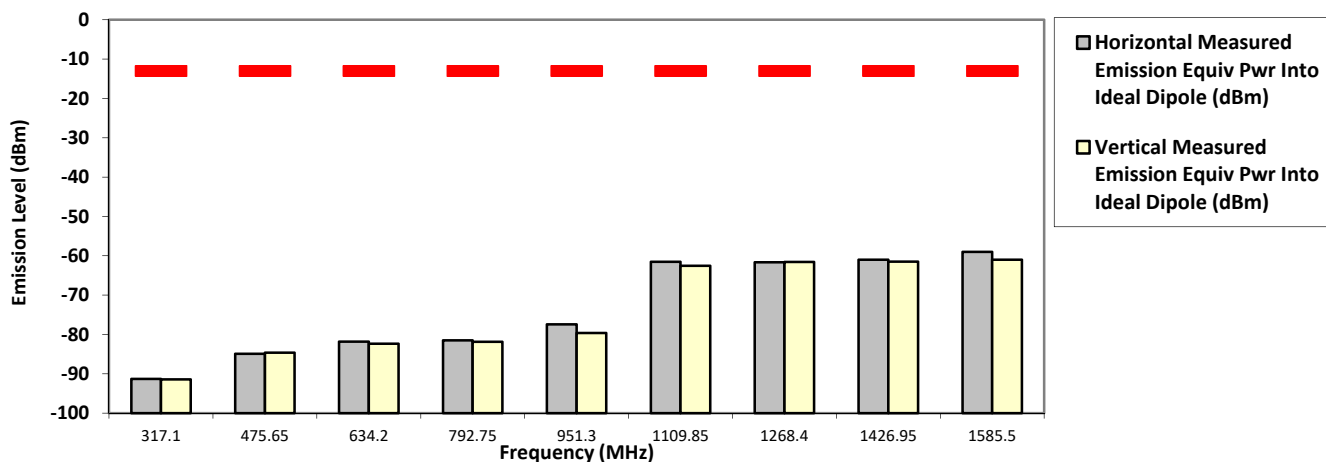

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1


Test Mode: TX Analog
 25 kHz

161.700000 MHz

54.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-91.2426 **	-90.4250 **
485.1000	-13.0000	-85.2693 **	-84.8050 **
646.8000	-13.0000	-80.9940 **	-80.9221 **
808.5000	-13.0000	-81.4437 **	-80.9103 **
970.2000	-13.0000	-80.0562 **	-78.9807 **
1131.9000	-13.0000	-61.4285 **	-61.6197 **
1293.6000	-13.0000	-61.6561 **	-62.2116 **
1455.3000	-13.0000	-61.2140 **	-60.6175 **
1617.0000	-13.0000	-59.6055 **	-59.0845 **

RADIATED SPURIOUS EMISSIONS

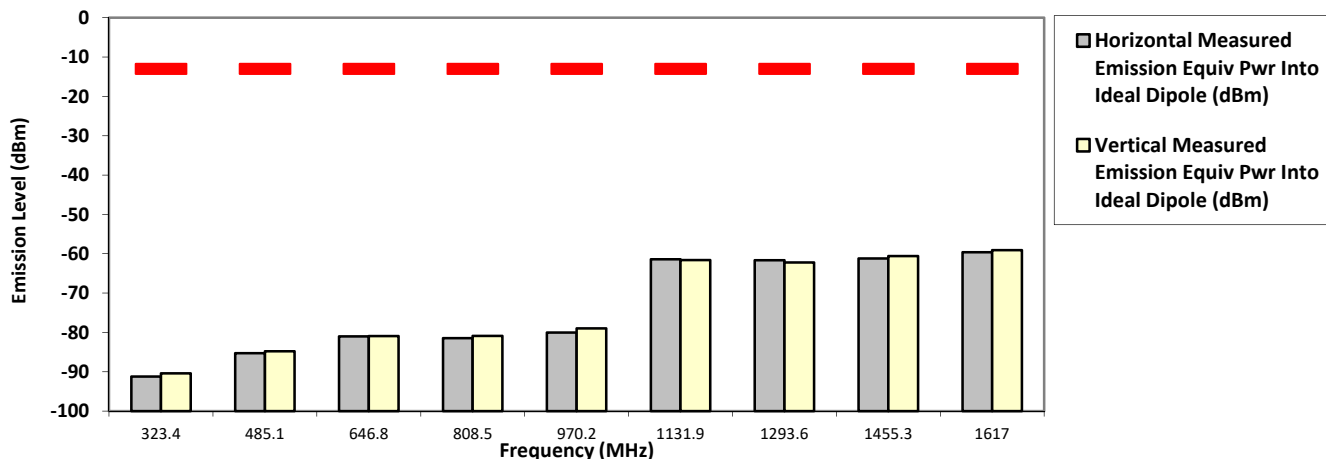

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1


Test Mode: TX Analog
 25 kHz

161.700000 MHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
323.4000	-13.0000	-91.2159 **	-91.1108 **
485.1000	-13.0000	-85.5111 **	-84.9246 **
646.8000	-13.0000	-81.1589 **	-81.9243 **
808.5000	-13.0000	-79.9202 **	-81.0518 **
970.2000	-13.0000	-79.9966 **	-79.6071 **
1131.9000	-13.0000	-62.2903 **	-62.0122 **
1293.6000	-13.0000	-61.3173 **	-61.8450 **
1455.3000	-13.0000	-60.6753 **	-60.2413 **
1617.0000	-13.0000	-60.1735 **	-59.4550 **

RADIATED SPURIOUS EMISSIONS

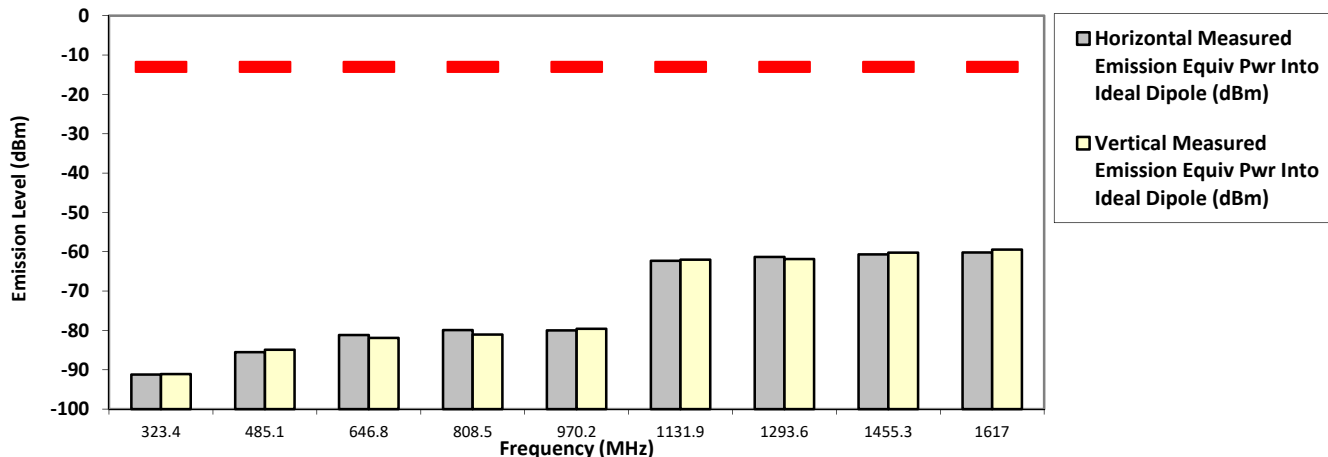

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151
 Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

SR:22121-EMC-00003


173.987500 MHz

Test Mode: TX Analog
 25 kHz

54.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
347.9750	-13.0000	-90.7783 **	-90.6802 **
521.9625	-13.0000	-83.5559 **	-83.5723 **
695.9500	-13.0000	-82.4389 **	-83.1340 **
869.9375	-13.0000	-80.6002 **	-81.4194 **
1043.9250	-13.0000	-61.6034 **	-62.4841 **
1217.9125	-13.0000	-61.5692 **	-62.2512 **
1391.9000	-13.0000	-61.9078 **	-61.3871 **
1565.8875	-13.0000	-59.7528 **	-61.0390 **
1739.8750	-13.0000	-59.8883 **	-59.9722 **

RADIATED SPURIOUS EMISSIONS

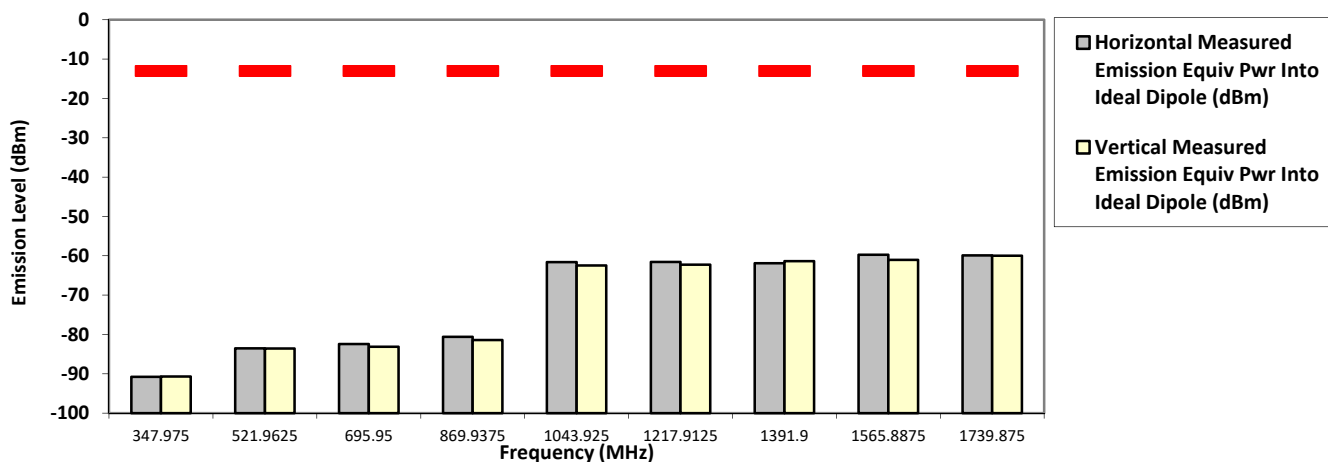

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1


Test Mode: TX Analog
 25 kHz

173.987500 MHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
347.9750	-13.0000	-90.2538 **	-89.9217 **
521.9625	-13.0000	-85.1164 **	-84.5309 **
695.9500	-13.0000	-80.1366 **	-82.6402 **
869.9375	-13.0000	-80.7898 **	-80.0360 **
1043.9250	-13.0000	-62.1322 **	-62.0663 **
1217.9125	-13.0000	-61.6861 **	-61.6930 **
1391.9000	-13.0000	-60.8533 **	-61.0747 **
1565.8875	-13.0000	-60.1584 **	-59.7011 **
1739.8750	-13.0000	-59.0192 **	-58.4061 **

RADIATED SPURIOUS EMISSIONS

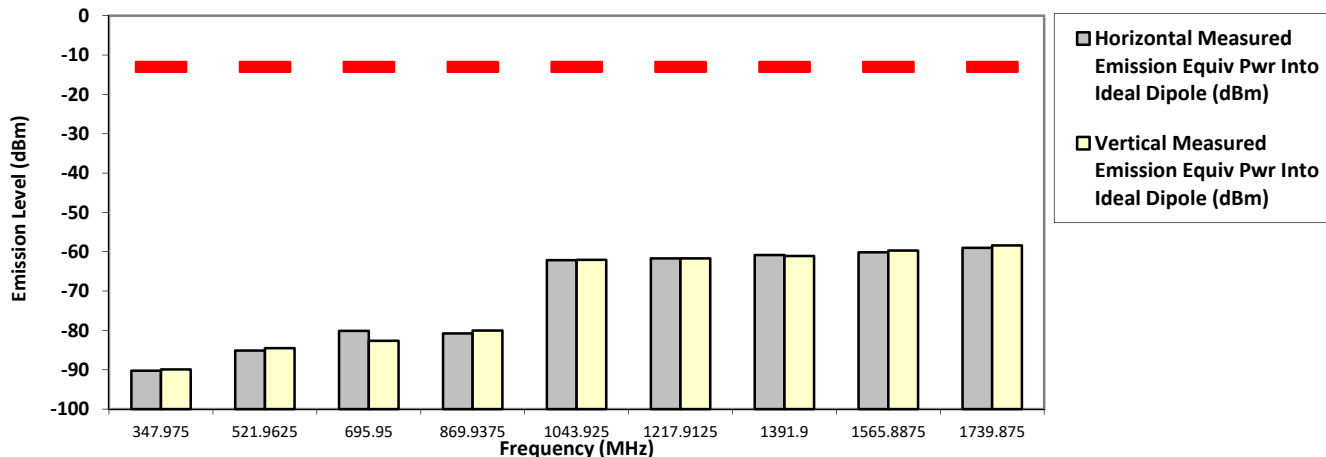

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks:


Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

6.11.3. Test Result (Digital)

Model Number: AAM28JQN9RA1AN **SAC Transmitter Radiated Emission:** **SR:22121-EMC-00003**
Battery Part No: NA **S/N: 511TWP7151**
Accy Part No: 3921-HKN4192B-1, RMN5127C-C1
Test Mode: TX Digital
138.012500 MHz **12.5 kHz** **54.000 Watt(s) /Max Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-92.1272 **	-92.6836 **
414.0375	-20.0000	-87.2045 **	-88.1701 **
552.0500	-20.0000	-81.3343 **	-80.8437 **
690.0625	-20.0000	-82.3809 **	-80.7129 **
828.0750	-20.0000	-80.3787 **	-80.1719 **
966.0875	-20.0000	-80.0213 **	-79.1513 **
1104.1000	-20.0000	-62.0242 **	-62.2985 **
1242.1125	-20.0000	-60.9189 **	-60.1563 **
1380.1250	-20.0000	-60.7872 **	-61.4997 **

RADIATED SPURIOUS EMISSIONS

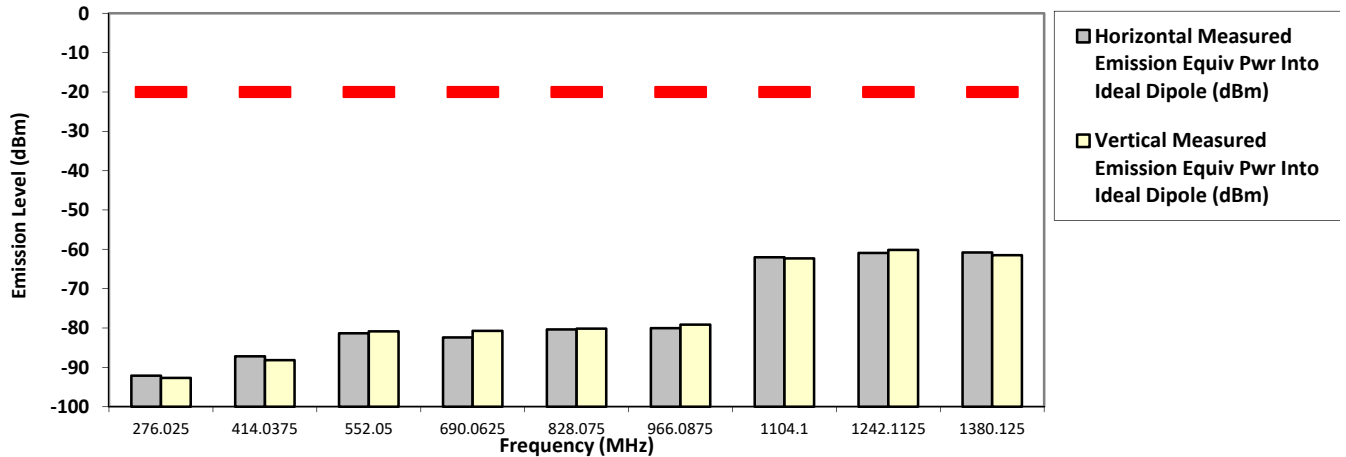

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB


Remarks: Passed Results Marginal Results Failed Results

SAC Transmitter Radiated Emission:
Model Number: AAM28JQN9RA1AN **S/N: 511TWP7151** **SR:22121-EMC-00003**
Battery Part No: NA **Accy Part No: 3921-HKN4192B-1, RMN5127C-C1**
Test Mode: TX Digital

138.012500 MHz **12.5 kHz** **25.000 Watt(s) /Low Power**

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
276.0250	-20.0000	-91.9624 **	-90.7913 **
414.0375	-20.0000	-87.6880 **	-88.2273 **
552.0500	-20.0000	-81.6093 **	-81.4363 **
690.0625	-20.0000	-82.7882 **	-81.9877 **
828.0750	-20.0000	-79.8339 **	-80.7940 **
966.0875	-20.0000	-79.4282 **	-78.5309 **
1104.1000	-20.0000	-62.7583 **	-62.0796 **
1242.1125	-20.0000	-61.7231 **	-61.3397 **
1380.1250	-20.0000	-60.5364 **	-61.9045 **

RADIATED SPURIOUS EMISSIONS

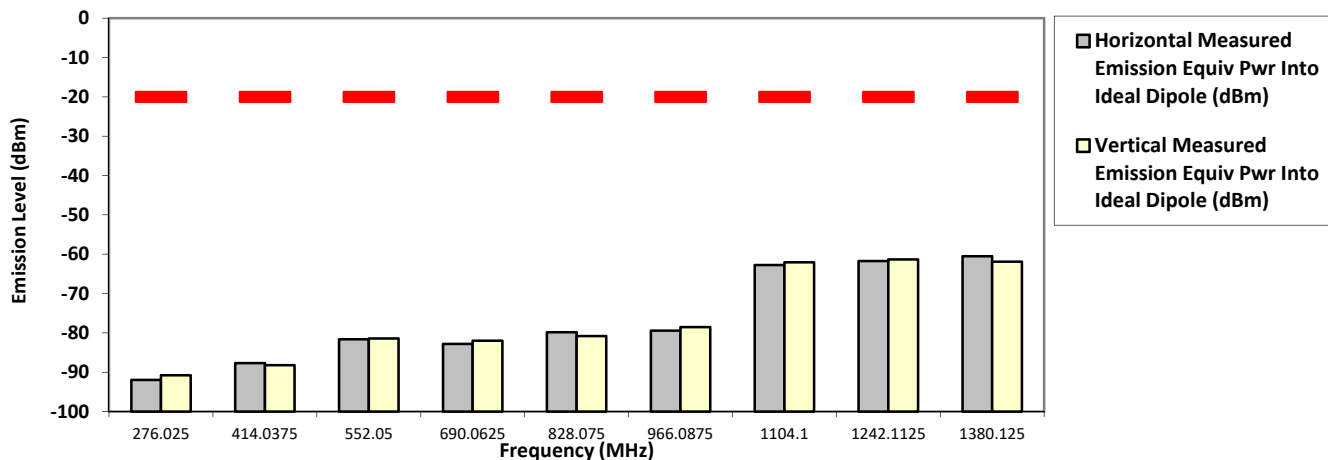

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151
 Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

SR:22121-EMC-00003

Test Mode: TX Digital


158.550000 MHz

12.5 kHz

54.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-90.9176 **	-89.8841 **
475.6500	-20.0000	-85.4849 **	-85.8219 **
634.2000	-20.0000	-81.9605 **	-81.4692 **
792.7500	-20.0000	-79.8884 **	-80.1607 **
951.3000	-20.0000	-79.7483 **	-79.8609 **
1109.8500	-20.0000	-62.7200 **	-61.8805 **
1268.4000	-20.0000	-62.0243 **	-61.7614 **
1426.9500	-20.0000	-60.3439 **	-61.2379 **
1585.5000	-20.0000	-59.8335 **	-59.4192 **

RADIATED SPURIOUS EMISSIONS

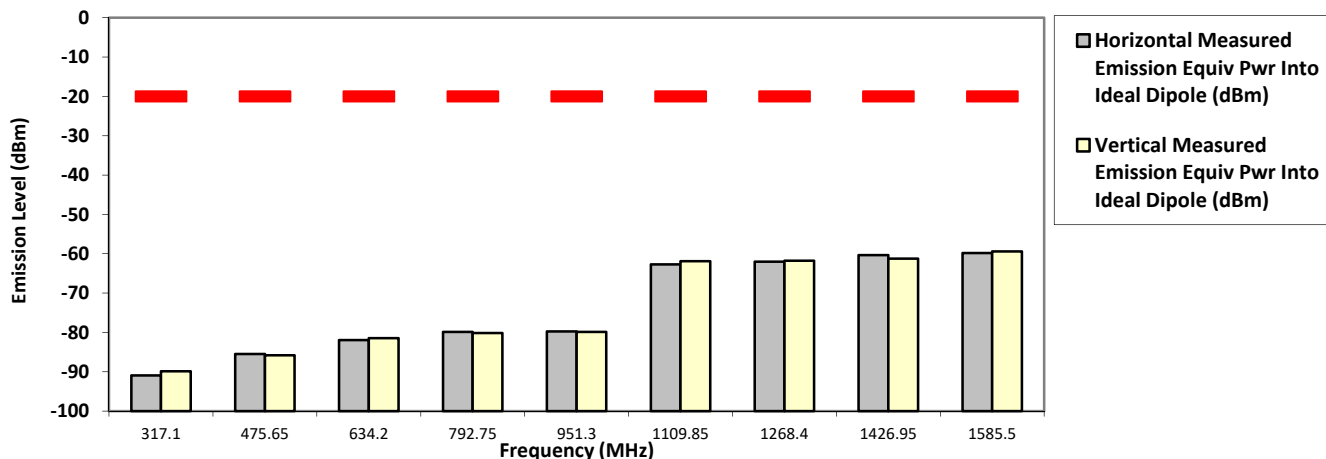

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151
 Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

SR:22121-EMC-00003

Test Mode: TX Digital


158.550000 MHz

12.5 kHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
317.1000	-20.0000	-90.9359 **	-91.7138 **
475.6500	-20.0000	-84.7292 **	-84.9980 **
634.2000	-20.0000	-82.5270 **	-81.4439 **
792.7500	-20.0000	-80.9319 **	-81.5101 **
951.3000	-20.0000	-78.8166 **	-80.3902 **
1109.8500	-20.0000	-62.2539 **	-62.4688 **
1268.4000	-20.0000	-60.7472 **	-61.5567 **
1426.9500	-20.0000	-61.7068 **	-61.6650 **
1585.5000	-20.0000	-60.9366 **	-59.6727 **

RADIATED SPURIOUS EMISSIONS

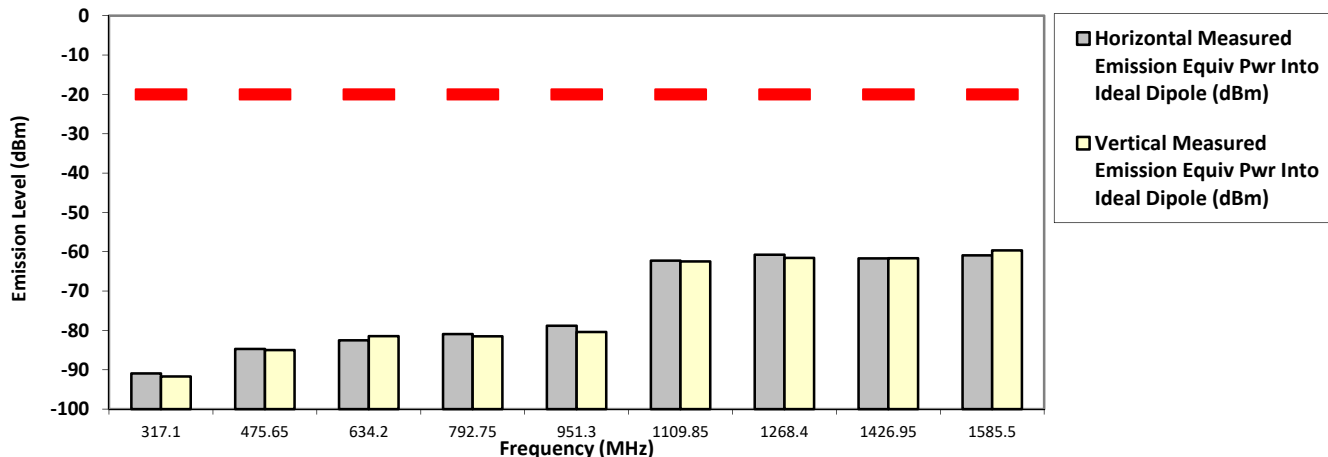

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.
 *Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

Test Mode: TX Digital


161.700000 MHz

12.5 kHz

54.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-91.8279 **	-91.4471 **
485.1000	-20.0000	-86.2121 **	-85.3666 **
646.8000	-20.0000	-81.2035 **	-82.7058 **
808.5000	-20.0000	-81.6105 **	-81.2581 **
970.2000	-20.0000	-80.2783 **	-80.0837 **
1131.9000	-20.0000	-62.4468 **	-61.9906 **
1293.6000	-20.0000	-61.8575 **	-61.3881 **
1455.3000	-20.0000	-61.6150 **	-61.5818 **
1617.0000	-20.0000	-60.6946 **	-59.2695 **

RADIATED SPURIOUS EMISSIONS

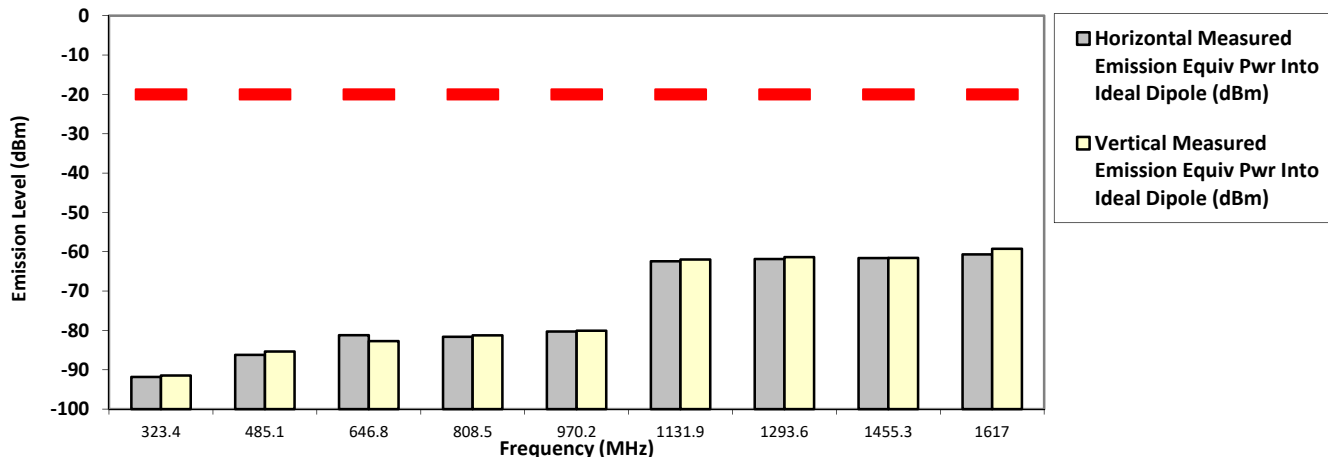

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

Test Mode: TX Digital


161.700000 MHz

12.5 kHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
323.4000	-20.0000	-91.5517 **	-91.2684 **
485.1000	-20.0000	-84.0273 **	-85.1049 **
646.8000	-20.0000	-80.9570 **	-83.0635 **
808.5000	-20.0000	-80.9949 **	-80.7859 **
970.2000	-20.0000	-79.3243 **	-80.8011 **
1131.9000	-20.0000	-61.5126 **	-61.8180 **
1293.6000	-20.0000	-61.4691 **	-61.7087 **
1455.3000	-20.0000	-60.7131 **	-62.1405 **
1617.0000	-20.0000	-60.0663 **	-60.2316 **

RADIATED SPURIOUS EMISSIONS

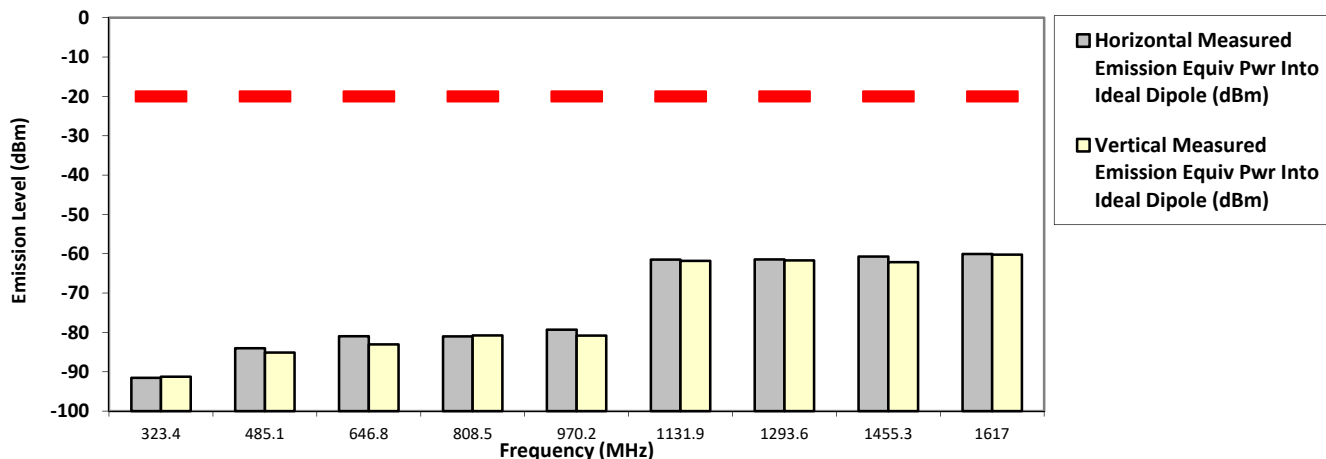

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151

SR:22121-EMC-00003

Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

Test Mode: TX Digital


173.387500 MHz

12.5 kHz

54.000 Watt(s) /Max Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equip Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equip Pwr Into ideal Dipole (dBm)
346.7750	-20.0000	-88.0788 **	-89.8526 **
520.1625	-20.0000	-84.2935 **	-83.6074 **
693.5500	-20.0000	-81.6940 **	-81.8989 **
866.9375	-20.0000	-80.9776 **	-79.4802 **
1040.3250	-20.0000	-62.5142 **	-62.9102 **
1213.7125	-20.0000	-61.5368 **	-60.8876 **
1387.1000	-20.0000	-60.1748 **	-61.5665 **
1560.4875	-20.0000	-60.7323 **	-60.0257 **
1733.8750	-20.0000	-60.3031 **	-58.7131 **

RADIATED SPURIOUS EMISSIONS

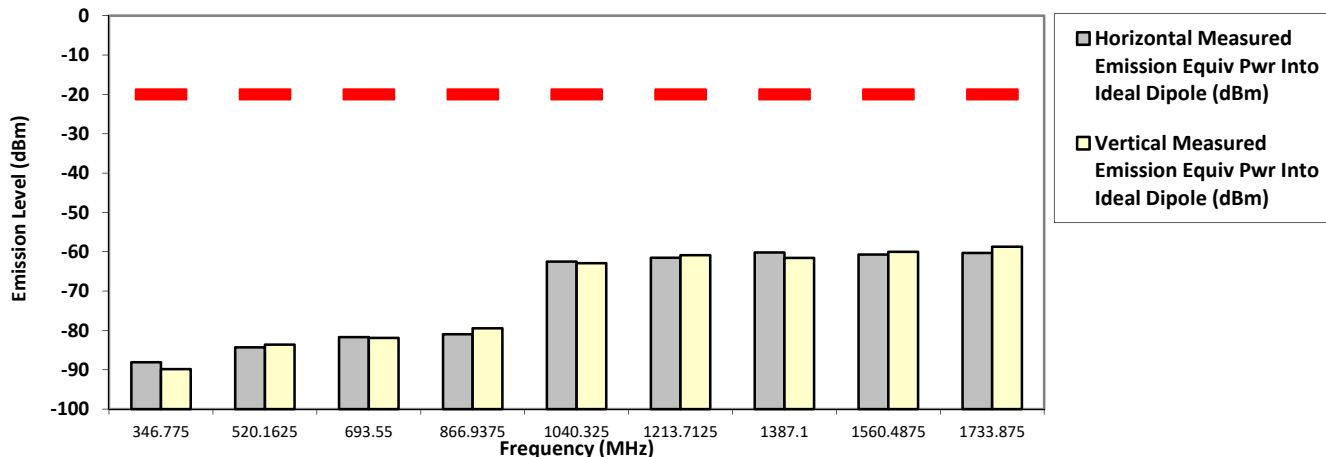

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks:

Passed Results	Marginal Results	Failed Results
----------------	------------------	----------------

Model Number: AAM28JQN9RA1AN
 Battery Part No: NA

SAC Transmitter Radiated Emission:

S/N: 511TWP7151
 Accy Part No: 3921-HKN4192B-1, RMN5127C-C1

SR:22121-EMC-00003

Test Mode: TX Digital


173.387500 MHz

12.5 kHz

25.000 Watt(s) /Low Power

Frequency (MHz)	Limit	Horizontal Measured Emission Equiv Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into ideal Dipole (dBm)
346.7750	-20.0000	-90.9080 **	-89.4255 **
520.1625	-20.0000	-84.5699 **	-82.6291 **
693.5500	-20.0000	-81.6869 **	-81.5899 **
866.9375	-20.0000	-81.1158 **	-80.0066 **
1040.3250	-20.0000	-61.9789 **	-62.1437 **
1213.7125	-20.0000	-61.6407 **	-62.3608 **
1387.1000	-20.0000	-61.5361 **	-61.5482 **
1560.4875	-20.0000	-60.5523 **	-58.6660 **
1733.8750	-20.0000	-59.7253 **	-60.0946 **

RADIATED SPURIOUS EMISSIONS

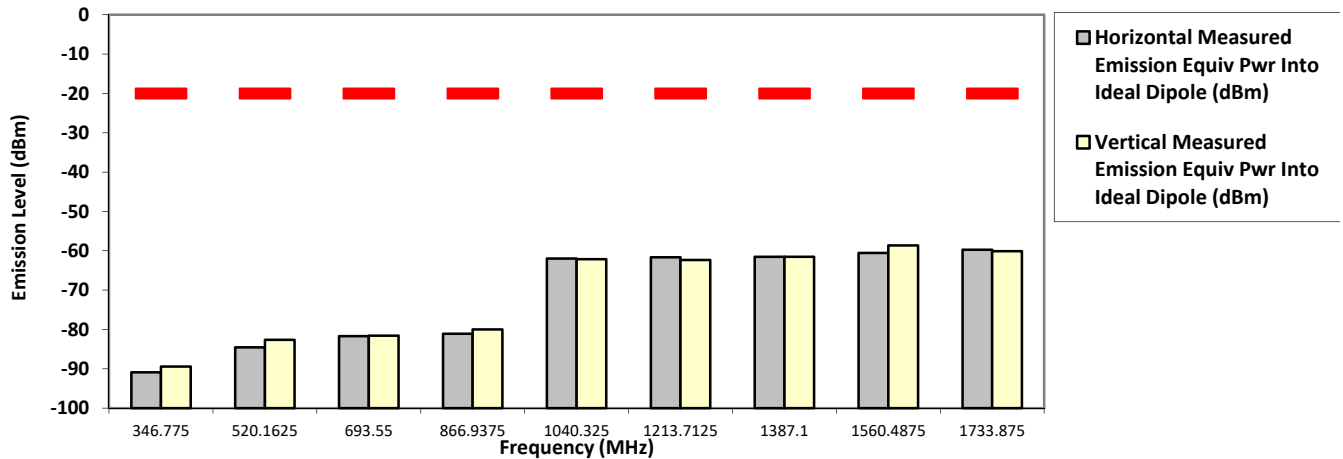

The data presented here was taken using the substitution method as found in the ANSI C63.26-2015 document.
 Motorola Penang EMC Lab - Test Performed by: Qawiman&Fendi Wed, 16 Sep, 2020

Remarks: ** Indicates the spurious emission could not be detected due to noise limitations or ambient.

*Pursuant to CFR 47 Part 2.1057 (c), emissions attenuated more than 20 dB below the permissible limit are not reported
 Temp(Deg): 23.9 Hum(%RH): 68.7

System MU: 4.03 dB

Remarks: Passed Results Marginal Results Failed Results

6.11.4. Test Limit


Table below summarized the power of any emission outside a licensee’s frequency block shall be attenuated below the transmitter power (P) by at least

Channel Spacing	Part 22	Part 24D	Part 74	Part 80	Part 90 (UHF, VHF, 800, 900)	Part 90 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz		Not Applicable		43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

Channel Spacing	RSS 134	RSS 182	RSS 119 (UHF, VHF, 800, 900)	RSS 119 (700)
12.5kHz	43 + log ₁₀ (P) (-13 dBm)	Not Applicable	50 + log ₁₀ (P) (-20 dBm)	43 + log ₁₀ (P) (-13 dBm)
25kHz	Not Applicable	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)	43 + log ₁₀ (P) (-13 dBm)

6.12. Effective Radiated Power (ERP)

6.12.1. Test Setup

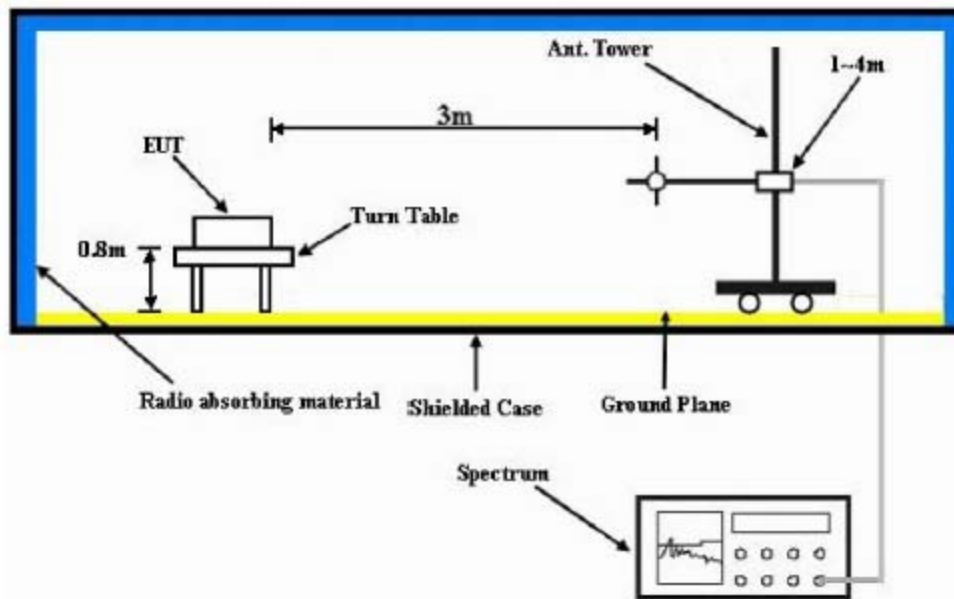

- 1) The Resolution Bandwidth for Equivalent Radiated Power (ERP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 2) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height (for $f_c < 1\text{GHz}$) or 1.5m (for $f_c > 1\text{GHz}$) of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 3) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

6.12.2. Test Result


Not Applicable

6.12.3. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20 dB). Power is given in terms of effective radiated power (ERP).

6.13. GNSS (EIRP for 1559 - 1610MHz)

6.13.1. Test Setup

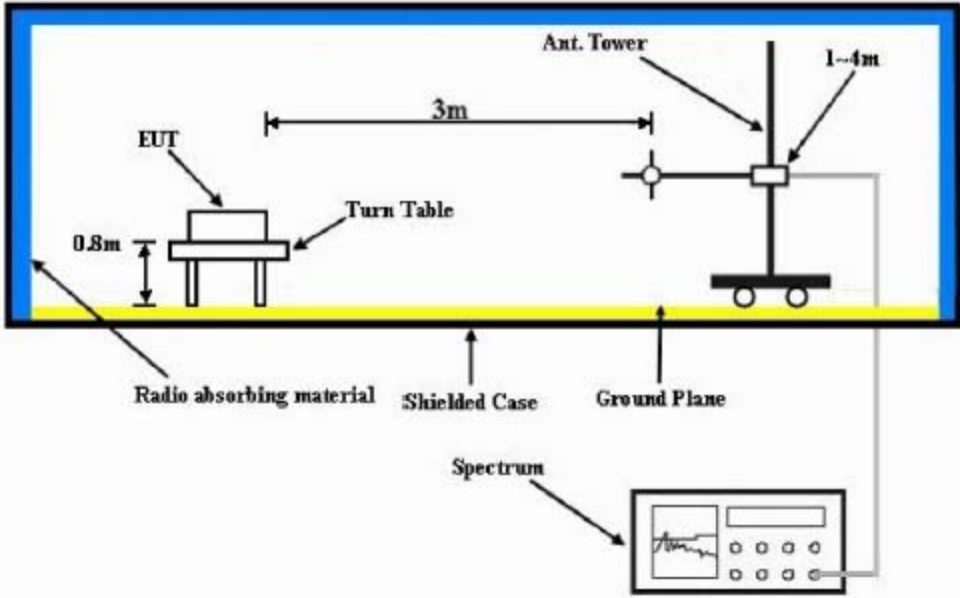

- 4) The Resolution Bandwidth for Equivalent Isotropically Radiated Power (EIRP) below 1 GHz is 100 kHz with Video Bandwidth = 300 kHz and Resolution Bandwidth for EIRP above 1 GHz is 1 MHz with Video Bandwidth = 3 MHz. Detector Mode is RMS.
- 5) In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The “Read Value” is the spectrum reading of maximum power value.
- 6) The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.
- 7) $EIRP = \text{“Read Value”} + \text{Measured substitution value} + 2.15$.

6.13.1. Test Result

Not Applicable

6.13.2. Test Limit

For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

~ End of Test Report ~